

# WIRELESS WEEKLY

3<sup>d</sup>

THE  
100%  
AUSTRALIAN RADIO  
JOURNAL

Vol. 4  
No 16

REGISTERED AT THE G.P.O., SYDNEY, FOR TRANSMISSION BY POST AS A NEWSPAPER

FRIDAY, AUGUST 1, 1924

**This Week's Feature: Construction of Single Slide Tuner**

## *New System Wireless*

*Why Always Blame the Broadcasting?*

*Perhaps Your Phones Distort*

**NEW SYSTEM HEADPHONES**

*CANNOT distort, each receiver being matched in tone*

*Price 35/-*

OBTAINABLE AT ALL RADIO DEALERS

*New System Telephones Pty. Ltd.*

280 Castlereagh St.  
Sydney

25-27 Queen's Bridge St.  
Melbourne



# SIGNAL Home Assembly Sets



Model Phone Valve, £5/10/-



Model Q, 2 Valves, £9/9/-  
Model R three Valves (Audio Freq.), £11/11/-



Model T, 4 Valves (Radio Freq.)  
£11/11/-

Model S, 3 Valves (Radio Freq.)  
£13/13/-

## Make It Yourself

**T**HE SIGNAL HOME ASSEMBLY SETS are designed to meet all demands for complete sets ready to be assembled. Simply constructed, and yet efficient. Each set contains all the parts necessary to construct the set proper. All contained in an attractive oak cabinet, mission finish, with engraved Bakelite panel all bored ready for mounting the parts.

INSTRUCTIONS and a clear diagram make it very easy to assemble these sets.

BOYS, YOUNG and OLD, here you can get all the thrill and satisfaction of MAKING YOUR OWN, and SAVE HALF THE COST

ASK YOUR DEALER FOR "SIGNAL"

and if he has not yet stocked it write us

# United Distributors Limited

28 Clarence-st., Sydney

(WHOLESALE)

592 Bourke-st., Melbourne



# WIRELESS SUPPLIES LTD.

THE HOME OF "VOLMAX" RADIO APPARATUS

KEEP THIS LIST BY YOU FOR FUTURE REFERENCE.

## EXPERIMENTAL RECEIVING SETS

### DOUBLE SLIDE TUNER CRYSTAL SETS.—

With detector and 'phone condenser, on Bakelite panel, Prices . . . . . 29/6, 35/-, 38/6

LOOSE COUPLER SETS.—Complete with detector and 'phone condenser on Bakelite panel; very highly finished; wave length range 150 to 1,500 metres. Price . . . . . £3/5/-

NATIONAL MONODYNE VALVE SET.—Uses valves UV201A, C300, WD12. Small in size, large in results. Price (without valve) £3

CABINET CRYSTAL SETS.—Highly finished, wave length, 150 to 1,500 . . . . . Price £6/10/-

VALVE MAGNIFIERS.—For magnifying the music on crystal or valve sets), cabinet type, Bakelite panel, efficient transformer; arranged for either English or American valves. One Stage. Prices . . . . . £5, £7, and £10 each.

Two Stages. Price . . . . . £10, £12 and £15 each.

## AERIAL EQUIPMENT.

AERIAL WIRE.—Per 100 feet. Price . . . . . 2/9

LEAD IN WIRE.—7/20, insulated. Price, per yard . . . . . 2d.

Some sets are made to catch the people,

Ours are made to catch the music!

## BUZZERS.—

Nickel case. Prices . . . . . 4/6, 5/6 and 6/6

Hightone, in black metal case. Price . . . . . 9/6

## KEYS.—

Practice. Prices . . . . . 8/6, 12/6

Professional. Prices . . . . . 18/6, 25/- 37/6

## SWITCHES, FOR PANEL MOUNTINGS.—

Rotary, ebonite knob, nickel arm. Prices 1/6, 2/3, 3/6.

Miniature, DPDT, sure contact. Price . . . . . 4/6

Ordinary Type Series Parallel. Prices 3/6 and 6/6.

Improved, push-pull type. Price . . . . . 12/6

Battery Switches, push-pull. Price 3/6, 4/3

## COUNTRY CUSTOMERS: TRY OUR QUICK DESPATCH SERVICE. . . . .

## LOOSE COUPLER PARTS.—

Tubes (primary and secondary), 6d. each; primary ends (maple), 1/-; Secondary ends (maple) 6d. each; base boards (maple) . . . . . 3/3

## TRANSFORMERS.—Audio frequency.

"Jefferson," 3½ to 1 ratio, No. 41. Price, 30/-

"Jefferson," 3 to 1, Star. Price . . . . . 22/6

"All American," 5 to 1 . . . . . 30/-

"All American," push-pull transformers. Price, 45/-.

Volmax, 4 to 1 . . . . . 25/-

## TRANSFORMERS.—Radio Frequency.

R.C.A., 150 to 5000 metres. Price . . . . . 45/-

## CONTACT STUDS.—

Nickel (with nuts). Price, per doz. . . . . 1/-

Nuts (extra) . . . . . 4d.

SWITCH STOPS.—Nickel. Price, per doz. 1/- and 3/-.

BATTERY CLIPS.—Prices, each . . . . . 6d. and 1/9

## WE LIKE ANSWERING ENQUIRIES.

## TERMINALS.—

Brass. Prices, per doz. . . . . 3/-, 4/6, 7/-

Nickel Binding Posts. Price, per doz. 4/-, 6/-

Bakelite Binding Posts. Price . . . . . 5/-, 7/-

Bakelite Engraved Posts. Price, in sets.

Set . . . . . 4/6

Sliders and Rods, nickel plated, 6in. long, Each . . . . . 2/6

Ebonite Slider . . . . . 1/6

## GRID LEAKS.—

Variable, "Bretwood" . . . . . 4/3

Fixed "Volmax," ¼ to 5 megohms. Price, each . . . . . 1/6

Variable "Electrad." Price, each . . . . . 6/9

Variable "Bradleyleak" (to arrive) . . . . . 12/6

## BEZELS.—For valve peep holes, "Signal," 9d.

"Erla," nickel plated or black. Price . . . . . 1/6

## METERS.—Pocket, Voltmeter. Price . . . . . 8/6

Amps., 0 to 1.2, Panel, Hoyt. Price . . . . . 18/6

Volts, 0 to 10, Panel, Hoyt, Price . . . . . 18/6

Combination, Panel Volt Meter (moving coil)

"Pignolet (2 scales), 0 to 7 volts and 0 to 150. Price . . . . . 75/-

Eldridge, Hot Wire Aerial Meters. Price 52/6

Weston Plate Milli Ammeter (moving coil), Price . . . . . 45/-

Weston Thermo Radiation Meters Price 82/6.

## PRICES SUBJECT TO MARKET FLUCTUATION.

## VARIABLE CONDENSERS.—

"Gilfillan" .0003, excellent on Radio frequency circuits. Price . . . . . 18/6

"Tuneup," .001 m.f. . . . . 20/-

"Ansrad," .001 m.f. . . . . 18/6

Signal .001 m.f. Vernier . . . . . 30/-

Use a variable condenser and make your set efficient.

SHOULD THIS LIST NOT INCLUDE WHAT YOU REQUIRE. WE HAVE IT NEVERTHELESS

# WIRELESS SUPPLIES LTD.

Phone M 3378

21 ROYAL ARCADE, SYDNEY

We pay freight on all goods except Batteries

All enquiries and orders have the direct supervision of our Mr. Ray Evans (late in charge Radio Test Laboratory, Garden Island), who has been engaged professionally on Radio Work since 1912



FOR EVERYTHING

# WIRELESS

## E. R. CULLEN'S

ELECTRICAL SUPPLY & RADIO STORE

96 BATHURST STREET - - SYDNEY

TELEPHONES: CITY 869 & 2596

### IS FIRST AND FOREMOST

## Three Valve Signal Set For Suitable Slogan

*Example: "CULLEN CAN COMPETE"*

Each entry from city or suburban readers to be accompanied by one of my cash dockets for any value. Country readers --- no restriction whatsoever; post them in. Envelopes to be endorsed "Competition." The decision of the Editor of this Journal to be final. Entries close on August 22nd. Results in "Wireless Weekly," August 29th.

E. R. CULLEN'S  
Electrical Supply and Radio Stores  
96 Bathurst Street - - - Sydney



*"Where the Good Hats are"*



## Hullo! ————— Murdoch Speaking!

—thought you would like to know about Murdoch's latest—a Smart English Soft Felt that is most prominent just now in London's select circles. You will like

### *This English Model*

because of its refined lines, smart shaping, and pleasing colour tones, the latter comprising Mid, Light and Dark Grey, Beaver, Fawn and Myrtle Green. These super quality Pure Fur Felt Hats are hand-finished and blocked in the approved style; medium flat-set brim, with silk-bound edges to harmonise. Finished with grease-proof leathers. Sizes 6½ to 7½.

Easily 30/- Value for . . . . .

# 25/-

POSTAGE PAID TO YOUR DOOR.

Step in and view yourself in one of these Smart Hats — no obligation to purchase

# Murdoch's

When writing kindly mention "Wireless Weekly"

IN PARK STREET LTD., SYDNEY.

*"The World's Largest Men's and Boys' Wear Store"*



# FAMOUS FROST PARTS



## FROST-RADIO

No. 618. Bakelite Sponge Shock Absorber Socket, Standard base, panel or table mounting . . . . . 8/3

For 199 Tube . . . . . 8/3

For those who wish a compact gang of three Shock-Absorber Sockets. The construction is identical with our separate sockets, except for base. For panel or table mounting.



## FROST-RADIO

No. 600.—Frost-Radio Metal Frame Rheostat or Potentiometer.

Equal in operation to the best molded type, with precision, operation of all moving parts and guaranteed resistance wire. Frame is made of heavy sheet-brass, nickel plated and formed so as to give a rigid construction both to the windings and the contact arm. Central mounting thimble with locating tip prevents turning when mounted on panel. Washers provided to fit panels of varying thickness. Fluted molded knob and nickel plated pointer.

No. 600, Metal Frame Rheostat, 6 ohms . . . . . 5/6

No. 602, Metal Frame Rheostat, 35 ohms . . . . . 5/6

Same with Vernier . . . . . 7/6

No. 603, Metal Frame Potentiometer, 400 ohms . . . . . 5/6

No. 605, Metal Frame Potentiometer, 200 ohms . . . . . 5/6

EACH OF THE ABOVE, WITH  
VERNIER, 7/6.

## THE MOST COMPLETE LINE RADIO PARTS EVER

ONE PRICE

### FROST SOCKETS

- 618 SINGLE SHOCK ABSORBER SOCKET, for Standard Valves . . . . . 8/3
- 617 SINGLE SHOCK ABSORBER SOCKET, for UV199 and C299 . . . . . 8/3
- (All above sockets are made of Bakelite and have sponge rubber cushions.)
- 612 BAKELITE SOCKET, for C299 and UV199 Valves . . . . . 5/-
- 100 BAKELITE SOCKET, for Standard Valves . . . . . 5/-
- 619 3 GANG SHOCK ABSORBER SOCKET, for Standard Valves . . . . . 24/6
- 616 3 GANG SHOCK ABSORBER SOCKET, for UV199 C299 . . . . . 24/6

### FROST RHEOSTATS & POTENTIOMETERS

COMPLETE WITH TAPERED BLACK BAKELITE KNOBS, METAL PARTS HIGHLY NICKELLED, KNURLED TERMINALS, TECHNICALLY PERFECT.

- 650 RHEOSTAT, 6 ohm (Maroon Bakelite) . . . . . 7/3
- 651 RHEOSTAT, 6 ohm Vernier (Maroon Bakelite) . . . . . 9/6
- 652 RHEOSTAT, 35 ohm (Maroon Bakelite) . . . . . 7/3
- 653 RHEOSTAT, 35 ohm Vernier (Maroon Bakelite) . . . . . 9/6
- 600 RHEOSTAT, 6 ohm Metal Frame . . . . . 5/6
- 601 RHEOSTAT, 6 ohm Vernier, Metal Frame . . . . . 7/6
- 602 RHEOSTAT, 35 ohm, Metal Frame . . . . . 5/6
- 604 RHEOSTAT, 35 ohm Vernier, Metal Frame . . . . . 7/6
- 654 POTENTIOMETER, 400 ohm (Maroon Bakelite) . . . . . 9/6
- 605 POTENTIOMETER, 200 ohm, Metal Frame . . . . . 5/6
- 603 POTENTIOMETER, 400 ohm Metal Frame . . . . . 5/6

### FROST MISCELLANEOUS

- 301 EXTENSION CORD, complete with Adaptor and Plug, 20ft. . . . . 32/6
- 400 LOOSE COUPLER or Receiving Transformers . . . . . 75/-
- 410 CRYSTAL TUNING COIL SLIDER (1100 metre range) . . . . . 27/6
- 501 RADIO JACK BOX (for 4 plugs) . . . . . 28/-
- 611 ADAPTER, for C299 or UV199 . . . . . 5/6

“Applause” Cards Furnished Dealers and Clubs Without Charge

## United Distributors Ltd.

(WHOLESALE ONLY)

MANUFACTURERS OF RADIOVOX SETS

A FEW TERRITORIES OPEN FOR AGENTS

28 Clarence St., Sydney

Hobart



F  
R  
O  
S  
T



# “ LIKE POSTAGE STAMPS ——— ——— USED EVERYWHERE ”

## OF GUARANTEED QUALITY OFFERED IN AUSTRALIA

ALL DEALERS



### FROST JACKS AND PLUGS

NICKLE PLATED, FORMICA INSULATION, NICKLED SILVER CONTACT SPRINGS, PURE SILVER CONTACT POINTS.

|     |                              |     |
|-----|------------------------------|-----|
| 133 | OPEN CIRCUIT JACK            | 4/6 |
| 131 | DOUBLE CIRCUIT JACK          | 5/- |
| 134 | CLOSED CIRCUIT JACK          | 5/- |
| 135 | FILAMENT SINGLE JACK         | 6/- |
| 136 | FILAMENT DOUBLE JACK         | 6/6 |
| 126 | NEUTRODYNE CIRCUIT JACK      | 6/6 |
| 140 | PLUG, DOUBLE (2 connections) | 5/- |
| 139 | PLUG, SINGLE                 | 4/6 |

### FROST MISCELLANEOUS

|     |  |     |
|-----|--|-----|
| 630 | RESISTANCE UNIT, 35 ohm (to increase resistance) | 3/6 |
| 631 | INDUCTANCE UNIT (to increase wave length)        | 5/- |
| 620 | POTENTIOMETER SWITCH                             | 5/- |
| 621 | PARALLEL SWITCH                                  | 5/- |
| 608 | PUSH-PULL BATTERY SWITCH                         | 4/- |

### FROST HEAD FONES STANDARD THE WORLD OVER

|     |  |      |
|-----|--|------|
| 161 | FONES (Aluminium Head Pieces), 2000 ohm      | 32/6 |
| 171 | FONES (Aluminium Head Pieces), 3000 ohm      | 37/6 |
| 172 | FONES (Maroon Bakelite Head Pieces) 3200 ohm | 45/- |

THE MAGNETS IN FROST FONES ARE TREATED WITH COPPER TO PREVENT CORROSION BY MOISTURE and SALT AIR.

“ Applause ” Cards Furnished Dealers and Clubs Without Charge

## United Distributors Ltd.

(WHOLESALE ONLY)

MANUFACTURERS OF HOME ASSEMBLY SETS

Perth

Brisbane

Adelaide

Melbourne




FROST - RADIO

FROST COMBINATION  
POTENTIOMETER-  
RHEOSTAT

COMPLETE WITH KNOBS,  
ALL HAVE KNURLED BIND-  
ING POST CONNECTIONS,  
AND ARE TECHNICALLY  
PERFECT.

610 TUBE CONTROL UNIT, a  
combination of a 35 ohm  
Vernier Rheostat and 400  
ohm Potentiometer .. 17/6


607 TUBE CONTROL UNIT, a  
combination of a 6 ohm  
Vernier Rheostat and 200  
ohm Potentiometer .. 17/6



FROST - RADIO

No. 608, Push-Pull Battery Switch,  
4/-.



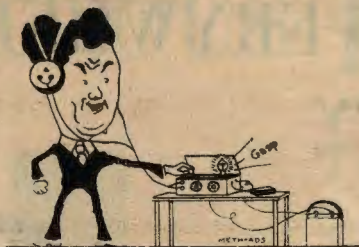

Contemplation



Desperation

# !! The Home of Radio !!!

offer you some startling prices

- 6 ohm Rheostats . . . . . 3/6 each
- 3/20 Bare Copper Wire . . . . . 2/9 per 100 ft.
- "Homophone" 8000 Ohm. Head 'Phones . . . . . 30/- pair
- 43 Plate Condensers Complete with Vernier and Dial, 30/- each
- 22 Plate Condensers complete with Vernier and Dial, 27/6 each
- Complete Crystal Set, Parts . . . . . 16/- set
- Complete Crystal Loose Coupler Set, Parts . . . . . 28/6 set
- Freshman Variable Grid Leaks . . . . . 5/- each
- Freshman Grid Leak and Condenser . . . . . 6/6 each

Price List of Complete Sets and Accessories on application from

## THE HOME ELECTRIC

106a. KING STREET, SYDNEY.

'Phone B5565.



Anticipation



Realization  
"with a Homophone Set"





**STA-PUT PLUG—**

Built to meet all requirements. Fits any tip. No tools necessary. PRICE:—

- Mar-Co Sta-Put Plug . . . . . 2/9
- Mar-Co Junior . . . . . 3/6



**MAR-CO JACKS—**

These Jacks are highly nickelled and insulated. Contacts are sterling silver. Extra washers allow wide range of panel adjustment. Construction makes short circuit impossible.

PRICE:—

- Open Circuit . . . . . 2/6
- Closed Circuit . . . . . 2/9
- Double Circuit . . . . . 3/6
- Single Filament . . . . . 3/9
- Double Filament . . . . . 4/3



**KNIFE SWITCHES—**

Hard rubber insulation, metal parts nickelled. PRICE:—

- Single Pole, Single Throw . . . . . 4/3
- Single Pole, Double Throw . . . . . 5/—
- Double Pole, Single Throw . . . . . 6/3
- Double Pole, Double Throw . . . . . 7/—



**GRID LEAK—**

Resistance, 1/5 to 5 megohms. Hard rubber base. Superior construction insures a life time of service. PRICE:—

- Variable Grid Leak . . . . . 10/6



**INDUCTANCE SWITCH—**

For panel mounting. Only one drilling necessary. Insulated with hard rubber. Bakelite knob. Metal parts nickelled. Ratchet stop on switch arm. PRICE:—

- 5 Point Switch . . . . . 7/—
- 7 Point Switch . . . . . 8/9
- 9 Point Switch . . . . . 8/9
- 11 Point Switch . . . . . 10/6



**SERIES PARALLEL SWITCH—**

For panel mounting. Only one drilling necessary. Insulated with hard rubber. Bakelite knob. Metal parts nickelled. PRICE:—

- Series Parallel Switch . . . . . 8/9



**MAR-CO D.P.D.T.—**

For panel mounting. Only one drilling necessary. Insulated with hard rubber. Bakelite knob. Metal parts nickelled. PRICE:—

- Double Pole, Double Throw . . . . . 8/9



**FILAMENT BATT. SWITCH—**

For panel mounting. Only one drilling necessary. Insulated with hard rubber. Bakelite knob. Metal parts nickelled. PRICE:—

- Filament Battery Switch . . . . . 6/3

- RHEOSTAT, 30 ohms . . . . . 7/—
- POTENTIOMETER, 600 ohms . . . . . 13/9

Trade inquiries from

**KEITH STOKES, 27 KING ST., SYDNEY**

Mar-Co Products Obtainable at: Ramsay, Sharp; Colville Moore; Burgin Electric; Harrington's; Farmer's; Wiles'; Smith's; Wireless Supplies; Radio Co.; Mark Foy's; David Jones.



# STOP, LOOK AND LISTEN IN WITH OUR CRYSTAL SET

Complete Parts of a Crystal Set, with Head Phones and Aerial Material, 44/-.  
The Set comprises the following material:—

All Parts of a 6 in. Tuning Coil, Mounted Detector, Baseboard, QSA Crystal  
2200 ohms Phones, 100 feet of Aerial, 2 Insulators, 10 yards of Leading-in  
Wires, Earth Clip and Terminals.

Complete, 44/-.

Valve Sets, complete with Phones and all necessary material, from £8.

## SLINGSBY & COLES

LICENSED RADIO DEALERS

1 YORK STREET . . . . SYDNEY

TELEPHONE B 4149

### STUDY THIS DIAGRAM


### A NON-REGENERATIVE RECEIVER

150 to 25,000 Meters.  
Inductance Coil Type, showing Gilfillan parts required.

Our Demonstration Hall is open to all interested in Radio.

Daily 3.15 to 5 p.m.  
and  
Friday Evenings.

YOU ARE CORDIALLY INVITED.

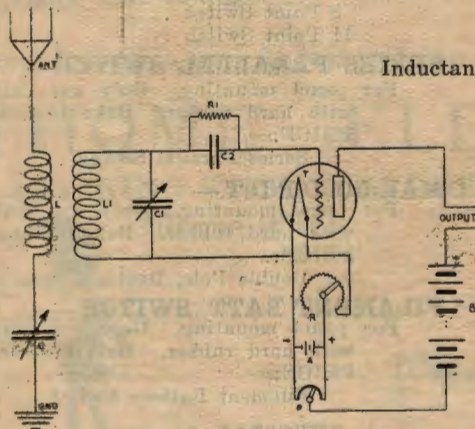

- T. Detector Valve and Gilfillan Socket.
- P. Gilfillan Potentiometer.
- A. 6 Volt Batteries.
- B. 22½ volts Dry Battery.
- L...Imperia Inductance Coil.

- L1...Imperia Inductance Coil.
- C. Gilfillan Variable Condenser (.001 m.f.)
- C1: Gilfillan Variable Condenser (.001 m.f.)
- R1. Imperia Variable Grid Leak
- C2: Imperia Grid Condenser
- R. Gilfillan Rheostat

**Harringtons** LTD

Wireless and  
Photographic  
Merchants

386 GEORGE STREET, SYDNEY

And at Melbourne, Brisbane, Adelaide, Katoomba,  
Wellington, N.Z., Auckland, N.Z. Agents Everywhere



# RADIO IN THE HOME



Every tone, every note clear and sweet. You can almost see the musicians swaying in time to the music. It's just as if the orchestra was right in the room with you.

"COL-MO" Broadcast Receivers are the last word in sensitivity, selectivity and simplicity. You need only to switch on the valves and set the dials for the station you want. The cabinet is of highest finish mahogany or walnut, and includes compartment for dry batteries.

The COL-MO is the ideal Radio Receiver for the home.

Crystal Sets, complete with 'Phones, Aerial Wire, Insulators, £3/10/- and £5.

Valve, complete with all Batteries, 'Phones, Loud Speaker, Aerial Wire, £14 to £75



## Radio Broadcasting

*Solves Your Home*

*Entertainment Problems*

**The Colville-Moore Wireless Supplies Ltd.**  
**10 ROWE STREET, SYDNEY**

Phone: B2261, Sales and Office.

Works: B1721



# ASSEMBLE YOUR OWN

THE PARTS ARE HERE  
AND GET THE PRICES

## LOUIS COEN WIRELESS PTY. LTD.

63 SWANSTON STREET, MELBOURNE

FULL PRICE LIST POST FREE



RHEOSTAT,

"Ormond," 7 ohms.

Superior Finish Smooth Contact.

4/-.



FIXED CONDENSERS.

Mica Dielectric.

.001, .002, .0002, .0005.

1/8.



SWITCH ARMS.

Laminated.

Constant Contact.

1/9.

GLASS ENCLOSED DETECTORS,  
VERTICAL TYPE, with easily ad-  
justed Glass ..... 3/6  
HORIZONTAL TYPE, Mounted on  
Ebonite ..... 3/-  
TERMINALS, Phone and Washer  
Type ..... 2½d. and 3d.

CRYSTAL CUPS ..... 4d.  
CRYSTALS, Midite and Hertzite  
..... 1/6  
AERIAL EARTH SWITCHES, in  
parts ready for assembly .. 1/9 set  
CONTACT STUDS, Nickel-plated  
and Brass ..... 1/- doz.

MAIL ORDERS OVER £1 POST FREE.



# “Half the fun is in the assembling of a Radio Set.”

Let us help you build your own. It is a simple matter if  
you have the proper instruction.

Let us advise you :

## CRYSTAL SET PARTS.

|                            |      |                                   |     |
|----------------------------|------|-----------------------------------|-----|
| Cardboard Tubes . . . . .  | 6d.  | Wire, from . . . . .              | 1/9 |
| Tube Ends, Small . . . . . | 4½d. | Detectors, from . . . . .         | 3/- |
| Tube Ends, Large . . . . . | 9d.  | Crystals, from . . . . .          | 6d. |
| Sliders and Rods . . . . . | 2/6  | Insulators, . . . . .             | 3d. |
| Base . . . . .             | 2/6  | Contact Studs, from, doz. . . . . | 1/3 |

Bakelite cut and drilled to order.

*FREE ADVICE ON BUILDING YOUR SET.*


# SMITH'S RADIO STORES

## 3 VICTORIA ARCADE,

OPP. HOTEL AUSTRALIA.



# Amplification Without Distortion

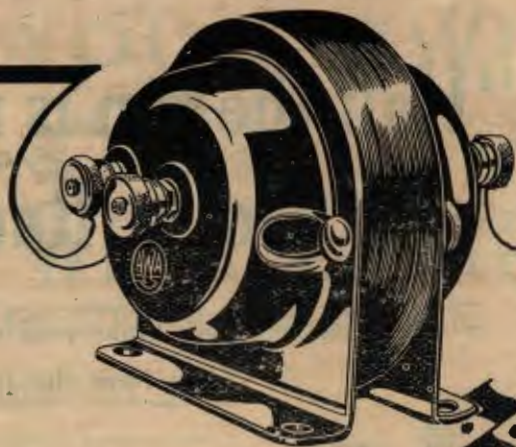

## *A.W.A. Audio Frequency Transformer*

Perfect reception depends upon the efficacy of the transformer to faithfully build up the low frequency oscillations.

The A.W.A. Transformer is a special purpose transformer, particularly suitable for the most complex circuits, and giving uniform amplification over the widest possible range of frequencies.

It will handle maximum volume for loud speakers with clear, pure and distortionless tone.

*Procurable from  
all Radio Dealers.*

**Amalgamated**  **Wireless**  
*(Australasia) Ltd.*

Clarence Street  
Sydney

Collins Street  
Melbourne

*Radio Dealers kindly write for Trade Price List.*

ITS AN



**PRODUCT**





## The Ten Watters' Club



NOT everybody knows of the existence of the Ten Watters' Club. Composed of a number of Sydney transmitters, it was formed some months ago, ostensibly for the purpose of promoting harmonious working between them and to further the interests of its members generally. To-day it has practically faded out of existence.

The reasons for its failure are many, and not far to seek. Primarily it had practically no organisation, and that fact alone was sufficient to cause its undoing. Its objects, which were probably very worthy ones, do not appear to have ever been carried out, and, due to the fact that extremely scanty particulars were available concerning the Club's activities, it has never been regarded seriously by experimenters.

Had its members thrown their weight into the Australasian Radio Relay League, thus giving their support to a body whose operations were not confined to a small circle

of transmitters, but rather to an amalgamation of the interests of ALL transmitters, they might have been a vital factor in the accomplishment of something worth while.

It is not too late, however, for the members of the Ten Watters' Club to play their part in the linking up of experimental transmitting stations. They can do it by concentrating their efforts upon the advancement of the Radio Relay League, which is destined eventually to be the organisation to which all EXPERIMENTAL transmitters will belong.

No general progress can be made by small scattered groups acting without co-operation between each other; but a great deal can be done by an organised body supported by, and representing all transmitters. The Radio Relay League is already well equipped; but it needs support, and encouragement. It is to be hoped that before long the League will include in its membership every experimenter holding a transmitting license.

### Roster for Week ending 6th August, 1924

|                | 7.30 to 8.0 | 8.0 to 8.30 | 8.30 to 9.0 | 9 to 9.30  | 9.30 to 10        | 10 to 10.30 |
|----------------|-------------|-------------|-------------|------------|-------------------|-------------|
| Thur, July 31  | 2 RA 2 GR   | 2 IJ 2 JM   | 2 YI        | 2 UW<br>ZN | 2 YG 2 VM<br>2 ZZ | 2 ZG        |
| Friday, Aug. 1 | 2 IJ 2 GR   | "           | "           | "          | "                 | "           |
| Saturday,      | 2 2 RA 2 GR | 2 IJ        | "           | "          | "                 | "           |
| Sunday, .      | 3 2 RA 2 GR | "           | "           | "          | "                 | "           |
| Mon., .....    | 4 2 RA 2 GR | 2 IJ        | "           | "          | "                 | "           |
| Tues., "       | 5 2 IJ      | "           | "           | "          | "                 | "           |
| Wednes., ..    | 6 2 RA 2 GR | 2 IJ        | "           | "          | "                 | "           |

From 6.55 p.m. until 7 p.m. every Saturday and Sunday, time Signals are sent by 2MU on a wave-length of 200 metres



# THE BOON OF THE BROADCAST BIRD.

A NEW ASPECT TO AN OLD ARGUMENT.

By Alan Burrows.

THERE are times when the "genuine experimenter" feels inclined to curse the invention of wireless telegraphy, which made broadcasting and all its after-effects possible. And the maligned broadcast-listener may occasionally have justification to register a moan about the airs and condescension exhibited by some of the genuine experimenters. This has led to much argument and dispute, which, like all argument and dispute, seldom gets anywhere but back to where it started, and sometimes beyond that. The truth is found in the adage, alleged to have been first promulgated by Uncle George: "It takes all sorts to make a world," and, however reluctant experimenters may be to admit it, the same applies in a radio world. It takes broadcasters and experimenters to make the scheme complete. And here is an instance of it.

Whatever is to be said—and quite a lot is said—concerning the rights (which often turn out to be the wrongs) of experimenters and broadcast addicts, there is this to be advanced for the broadcast listener: He has been responsible, unconsciously, it is true, for the cheapening of much of the gear which the experimenter uses. In other words, there are so many of him that manufacturers have been able to market their goods in sufficient quantities to lighten the price to the consumer. Which doesn't mean to say that any valve (except, of course, a transmitter) should cost more than 10/- to leave its native shores, nor have a large-sized duty shoved on to it, if only one was made per year. It means, simply, that the broadcaster has created a huge demand for gear that must inevitably have its effect upon its composite price. And if that effect is rather microscopic so far, it is due to overseas combines and rings, and exorbitant import duties—not by any means to the local dealer, who, more often than not, has to receive the blame.

The point, therefore, is that the demand created by the garden type of listener-in must sooner or later have its effect upon the gear which the hothouse type, the experimenter, uses—for both types do occasionally use the same sort of instruments, although many of the hothouse variety would

be loathe to admit it. In fact, Morse keys are almost the only item whose sales have not soared since broadcasters first began to broadcast.

The result, therefore, is that the experimenter finds to his hand a large assortment of condensers, rheostats, coils, inductances, and so on, *ad fin.*, all moderately priced and ready for use. It is true, of course, that this would have happened, to a certain extent, if broadcasting was still among the joys to come; but the demand made by experimenters could never have come near that created by the broadcast fans.

## THE OLD DAYS.

It is the pioneers who can really realise the truth of this; and in America and England, where accessories are so much cheaper than here, the fact must be doubly evident. Condensers haven't now to be home-made (whoever saw a really efficient home-made variable condenser?); rheostats and potentiometers no longer can be used for circular letter-racks, and in these days nobody knows the pride of a hand-made knob-and-dial.

Now, this isn't to say that the present-day sets are any handsomer than those made ten or twelve years ago; to compare them is next to impossible, just as it would be to compare a modern motor car with a stage coach from the point of view of workmanship, although in this case the stage coach would probably win. And the same could often be said of the earliest and latest wireless sets, for seldom does the modern enthusiast put the work into his outfit that his fathers in radio did. It simply isn't necessary.

Therefore, the modern experimenter, according to this, is deteriorating. His ability is fast becoming a thing of the past, and the time is gone when he can say proudly, "I made it myself." He says instead, if he is truthful (as one or two wireless fans are), "I assembled it myself." And he is just as proud and complacent about it as if he'd made everything himself, from the vacuum in his valve to the bakelite panel which supports it.

On the other hand, the set, when it is assembled, works several times as efficiently as some of the former ones (with the usual exception of those owned by a certain number, who, for the purposes of this narrative, shall

remain anonymous), and is more prepossessing in appearance—as it should be, considering it was actually "made" by American or English experts. And that introduces the question: Are the added efficiency, the increased convenience, and the gain in the quality of the finished article worth the sacrifice of the truthful and accurate boast that "I made it myself"?

Already, I know, everyone has answered strongly in the affirmative. Not many would care to go back to the days when every part had to be made by hand; to the numerous soul-destroying jobs which made the end of the work a relief and not a regret. Many will say, too, that now it would be impossible to make most of the requirements of a valve set, when even a so-called "home-made" transformer is nearly always a part of the intestines of some decrepit Ford. And there is a lot of truth in this, although to some the word impossible—except, perhaps, in relation to valves and one or two other items—has no meaning; this was the spirit bred in the early days of wireless.

## A BROADER FIELD.

And if that spirit doesn't exist any longer; if experimenters nowadays are reaching a condition of "cushiness" when they will scarcely be able to wind a loose-coupler, then broadcasting is to blame to a great extent. It is a fact, of course, that he who has tendencies this way is not worthy of the name of experimenter. But the fact remains that the modern amateur, with, once more, the exception of some old-timers, does lean that way; he wants to be pampered, and, with broadcast-listeners' materials handy, he is pampered.

Like everything else, however, this question has two sides to it, and, as it happens, in this case the other side happens to be the bigger. For the fact that now the experimenter can get his parts already made, and that he is freed from the petty annoyances of making terminals and contact-studs, has opened avenues of research and experimentation which otherwise would be closed. His hands are loosed, and he can set his face towards a broader field than circumstances have allowed him in the past.

And, if not yet, very soon the full benefit of the broadcast fans' huge call for goods will make itself felt amongst the amateurs. So let the experimenter, using a set whose parts were perhaps made for his neighbour, the broadcast-listener, before raising his voice and cursing the chap next door whom he nightly hears "receiving," remember that, after all, he has some-



thing for which to thank him. There are some who think that the experimental fan owes little to the other variety, and to some extent they are right, although the issue is nearly always exaggerated.

The dividing line, indeed, is gradually altering its position; and soon, it appears, the factions will consist of an alliance of broadcast-listeners and contented experimenters in opposition to the DX fiends. Eventually, however, even the long-distance men will be brought to a realisation that the casual experimenter who is trying to find something beyond a DX murmur, and the libelled broadcaster, play their part in the scheme of things that are wireless.



### THIS BEATS DUBBO.

"Airlie," Balnarring,  
Westernport, Victoria.

To Editor, "Wireless Weekly."

Dear Sir,—I have observed with much interest recent reports concerning crystal reception of broadcasting, but I think this beats all, don't you?

I am a 15-year-old experimenter, and my set is a home-made single slide crystal set. Am situated 40 miles air-line distance from Melbourne, three miles from the shore of Westernport Bay, which is easily found on a map of Victoria. My air-line distance from Sydney is about 500 miles.

I have received 3 A.R.'s programmes clearly and distinctly with good volume, day-time and night-time; ever since they started.

I also hear 3ZL New System Telephones and 3 M.E. Amalgamated Wireless day-time and night-time. 3 M.E.'s announcer is rather "raspy," but their programmes are excellent, and they roar in.

I had been receiving another station for about a month, sending theatrical displays, splendid orchestral selections and vocal items, but had not identified it.

But on the night of Thursday, July 4th, between the hours of 8 and 9 p.m., I heard an announcer say, "This is 2 F.C. Farmer's Broadcasting. Our next item is a soprano solo by Madam

Mary Anne McDonald, entitled "A Weary Heart." I heard another soprano solo, then a male quartette. (It was now after 9 p.m.) There were two more soprano solos, and then another song by Miss Thompson. The next item was a tenor solo, and then another item by Madam McDonald, "an old Scotch song," remarked the announcer.

The next item was a male quartette, "Comrades in Arms," by Mort's Dock Male Choir. The station closed down at 10 p.m.

On the following night I heard a baritone solo; then Mort's Dock Male Choir sang "Excelsior." Next a soprano solo by Miss Bryant; a male duet, baritone and tenor; solo, with the chorus whistled. The "Song of West" by Mr. — (X's), a double quartette by the choir, a solo by Mr. J. Elliott, "A Picaninies' Lullaby" by the choir, and then a soprano and tenor duet. Then the announcement, "This is 2 F.C. Farmer's Broadcasting; that concludes our programme for to-night. Good-night! Good-night!" National Anthem.

I wish to congratulate the announcer on his splendid radio voice, which was always audible. If any doubt arises I will forward names and addresses of witnesses, and I invite anybody to come and hear it for themselves.

My aerial is a twin-inverted L, each wire 65 ft. long (16 gauge copper wire), and both are spaced 6 ft. at each end. It is supported by two trees, each 50 ft. high. Lead in is 90 ft. long, taken from north end, and the earth connection is a sheet of galvanised iron buried 3 ft. in moist clayey soil.

I am using N.H.M. Galena in a home-made crystal detector.

Trusting you will find space for this.—I remain, yours truly,

D. N. FORBES.

### NO MORE FIRES THIS WINTER.

630 Willoughby Road,

Willoughby, July 18, '24.

The Editor, "Wireless Weekly."

Dear Sir,—I have read in your valuable paper of a country experimenter receiving 2F.C. on a crystal. Well, I have a new one here. On Thursday night, July 17th, I lost my only crystal, which, needless to say, put me in a bad temper. But being an experimenter, and trying to prove worthy of the name, I started to look around for a substitute, and failed to find anything for quite a while, when I saw a box of coke waiting to be put into the fire. Selecting a small piece, I put

it into my crystal cup. Imagine my surprise when a voice announced "2F.C. here." I also picked up 2BL, and later in the evening got 2BF. I tried several other pieces of coke, all with the same success. I don't know if this experiment is new to others, but it is new to me. Trust you will be able to let me know if I have discovered anything worth while. If, as I have just said, this idea is new, would you pass it on to others through the columns of your valuable journal? I have ordered a ton of coke, and the moral is, "Never tell your friends to eat coke, it may be useful."—Sincerely yours,

C. A. PIGGOTT,  
Experimenter No. 4362.

### SOME GOOD DX.

Box 38, G.P.O.,  
Rockhampton, Qld.,  
19th July, 1924.

The Editor, "Wireless Weekly,"  
33 Regent Street, Sydney.

Dear Sir,—Herewith is my DX report since the 2/7/24. I have only been able to get down under 300 metres since then. Nearly all the stations (experimental) mentioned have confirmed my reports. The results up to the 9th were obtained on 5 valves (2HF, det., 2LF), but since then all others were obtained on 4 valves, one stage of radio being omitted.

2/7/24—1YA (N.Z. 2000 miles, 3 ft. from phones), 2BL, 4CK, 2GQ, 4NAI.

3/7/24—2BL in daylight 20 ft. from loud speaker, 2HF. (I closed down at 6.45 p.m.)

4th & 5th—Had no accumulator.

6/7/24—KGO (3 ft. from phones, using 4 valves, held for 10 mins.), 2CM, 2HM, 2CR, 2ZZ, 5WJ;

7/7/24—2BL. (I closed down at 7.45 p.m.)

8/7/24—2GR (phone 12 ft. from phones), 2BL, 2AY, 2GY, 2YG, 2GQ, 5LO, 2BK, 4GE, 2GQ, 2CR, 2ZK, 2HM, 5WJ, and 2HH. (Not too certain about the last.)

9/7/24—2BL on 1 valve in daylight 800 miles, KGO best on 4 valves, 2GR, 2HM. (Battery flat at 8 p.m.)

10th & 11th—No accumulator.

12/7/24—Maximum = 4 valves—2GQ, 3BM, 2LO, 2YI, 2BK, 2ZZ.

13/7/24—KGO, 2BL, 2GQ, 2YI, 2HM.

14/7/24—2BK, 2YI, 2HM.

15/7/24—2HF, 2BL, 2DS, 2ZZ, 2BK, 2GQ.

Continued on page 44



## The Tuned Anode Unit of the Progressive Unit Panel Receiver.

(By "Insulator.")

This is the last unit I have to describe, and, like last week's, more than one can be made and added to the set. The particular purpose of this unit is to bring in the long distance signals. Actually this is accomplished in this fashion: The distant signal, when it arrives at your aerial, is generally very weak, worn out really, and lacking sufficient strength to actuate the detecting valve. What is wanted is something to boost the poor weak signal to give it sufficient strength to go along to the detecting valve and carry out its duty. So the Tuned Anode Unit is required to give it a spoonful of tonic, and the once weak signal gaily hops along to the detector and simply insists on being detected, as it is now strong enough

to fight for its rights. After being detected it can be heard on the phones quite comfortably. But, again, should you desire to have a louder signal, the Note Magnifier is pressed into commission, which will enlarge the volume, and consequently a louder signal results.

Theoretically, the Tuned Anode Unit amplifies the signal at radio or high frequency (too high to be audible) the detector rectifies, whereas the Note Magnifier amplifies the already detected signal at audio frequency or at a frequency to which the telephones, and in turn the human ear, can respond.

There are two well-known methods of radio frequency amplification. One

is accomplished by the use of radio frequency transformers, and the other is brought about by tuning the plate of the valve. This latter method is the one I prefer, hence I am recommending it here.

For this unit obtain the following materials:—

- 1—Piece of Bakelite, 9 in. x 8 in.
- 1—Marco 600 ohms Potentiometer.
- 1—Marco 6 ohms Rheostat.
- 1—77a23 Condenser.
- 1—Panel Mounting Coil Plug (United).
- 1—Set Ericsson Fuse Clips.
- 11—Bakelite Top Terminals.
- 1—3 in. Dial.

The construction is not going to present any great difficulties. Figure 9 will assist you in marking out and drilling your panel. You will note I have not included any distances for terminals, as I am sure you are all quite familiar with these now. Once again let me remind you of a centre punch for marking out, and let me advise caution when drilling the holes for the coil plug. Perhaps you had better take the measurements of your own plug before drilling, as a variation may take place in the manufacture. My own is as marked, 9/16ths apart.

After all holes are drilled, polish with good old Brasso and assemble your components. Fix your valve clips first; next, your rheostat, noting that the rheostat terminals don't short the bottom filament clip. Now attach your potentiometer. Say, how do you like this potentiometer? Splendid job, isn't it? Will take a lot of beating. Don't you think so? Good! I thought you would say that! Now add your coil plug and then your condenser. Finally, assemble your terminals. Quite easy, thanks to single hole fixing.

Now turn the panel round, and it should resemble Figure 10, minus the wiring, of course. Well, by following out Figure 10 you will soon have completed the wiring. I don't think I have ever told you how to get the connecting wire nice and straight. I myself unwind, say, 12 feet of the 16-gauge tinned copper wire and twist the end round a door knob. Holding the reel in my hand, I pull it tightly; pull it until I feel it give. Then it is quite straight. I then cut off the necessary lengths required for wiring. And, say, do you know I don't like the right-angled bends which are invariably seen in sets. I prefer to bend my wire in a nice curve, an effect I obtain by curling the wire around a

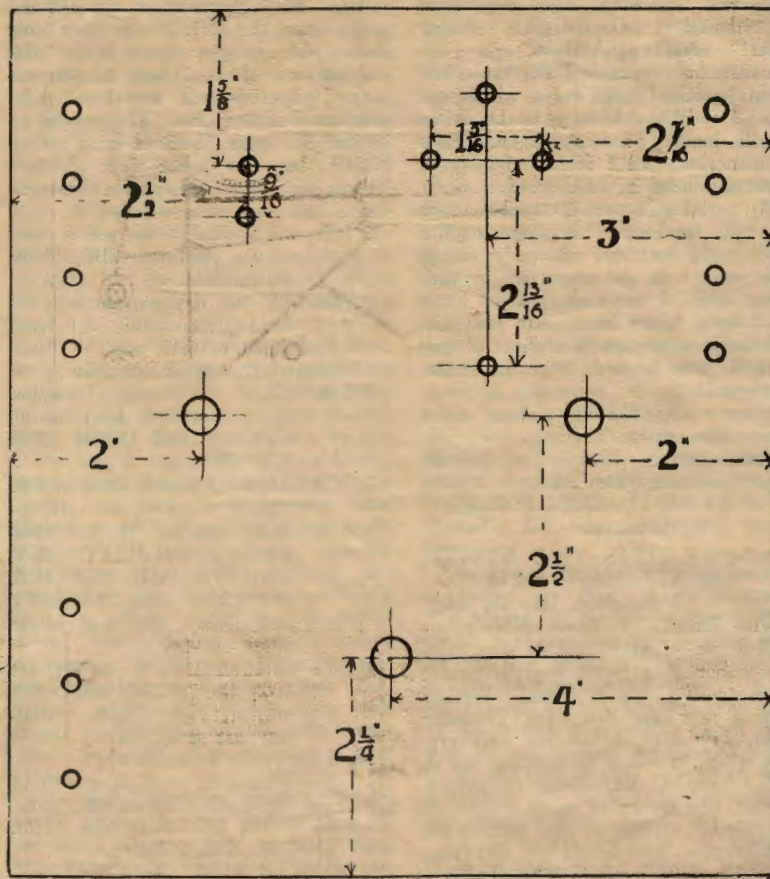


FIG 9



small empty cotton reel. It looks much better; and, personally, I think it will yield greater efficiency. Of course, that is a matter of opinion. Oh! don't be worried by the terminal to which no wire is connected. That is placed there to balance up the appearance. It may be left out, if desired.

Everything O.K.? Right! The valve again is a V24, as can be seen, and is certainly ideal for radio frequency amplification on account of the distances between the legs. Some people may think I am quite mad in recommending such expensive valves. I am not, because I don't think it is possible to better these valves for the purpose in which I have chosen them. It may be information to some when I say that almost all British ships employ either V24 or QX valves entirely (Isn't that right, Brasso?), and there is no question of that good results are obtained. Again, I have been asked why I have placed the valves in front of the panel. Well, I think the reason is obvious, and, apart from that, I don't see any reason why a valve should not be placed in front of the panel. To me it looks good.

However, insert the valve and the coil. This coil should be of the same value as the secondary coil employed. And, oh, say! I have discovered a splendid honeycomb coil at a very reasonable price. I think it is known as the Stokes coil, and I obtained it from E. R. Cullen. (I want to win his Slogan Competition.) I have compared them with several other makes, and I must say they give wonderful results, comparable even to the Atlas, and certainly superior to many another brand which is sold. To those who haven't purchased coils my advice is to ask and insist on the Stokes. I am sure you will not regret it.

Well, back to our set. This Tuned Anode Unit is inserted between the Tuning Unit and the Detector Unit, and linked across. No difficulty should

be experienced in linking, but, lest someone doesn't quite understand, I have shown it in the last figure. Connect everything up as shown, attach aerial and earth and coils, valves, etc., and listen-in. Bear in mind that now you are using Tuned Anode it will be necessary to reverse the Tickler Coil in the Tuning Panel. This little wrinkle will save you quite considerable trouble. However, are you listen-

ing-in? Righto! Tune your secondary by using condenser E. Got something? Yes! Well, turn to D, next F, and then G. Bring your tickler closer retune. Ah! That alright? Play about with your dial a little more; watch your filaments, don't have them too bright; and look to your grid leak. In a little while you will be

(Continued on Page 21.)


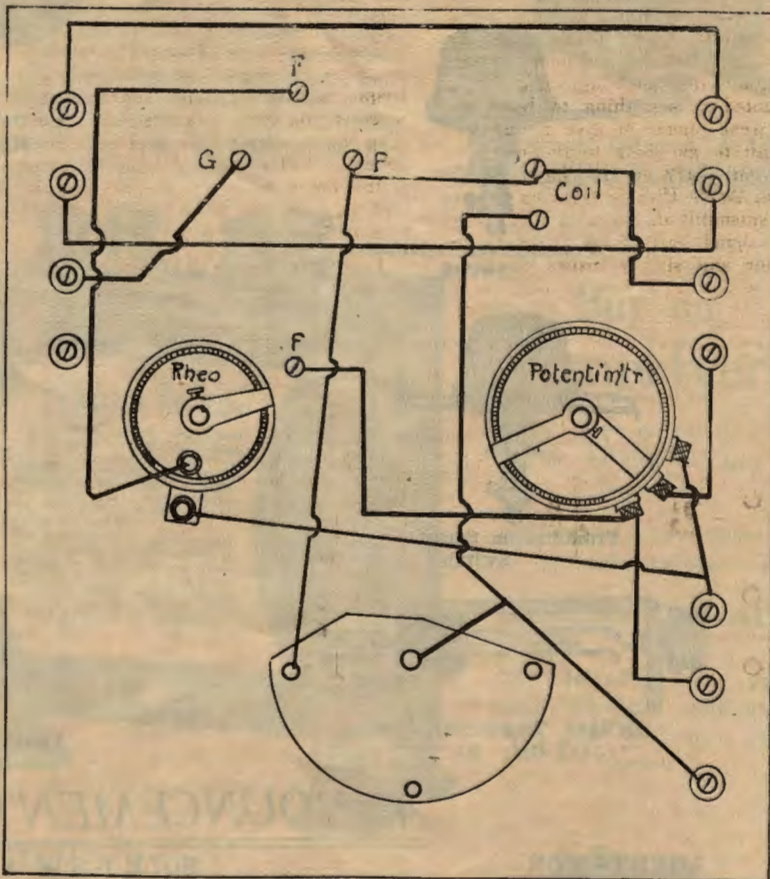


FIG 10





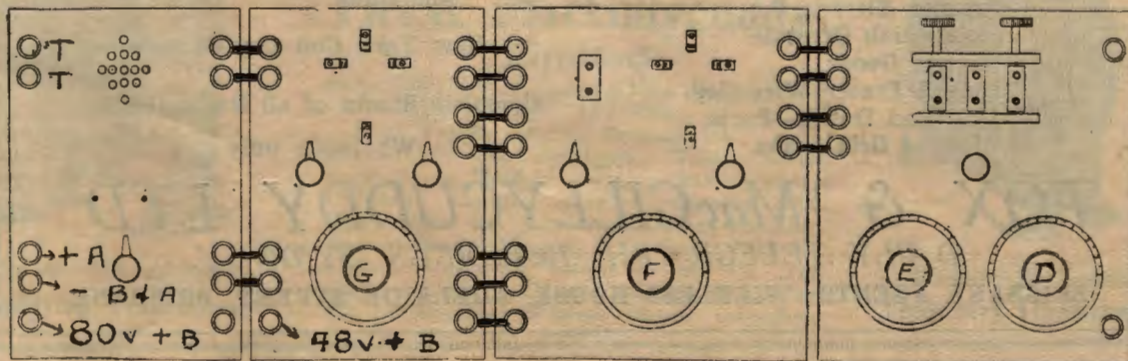

Framingham Potentiometer.



Framingham Inductance Switch.



Framingham Series Parallel Switch.



DeVeau Two-Circuit Radio Jack Cat. No. 25.



DeVeau Gold Seal Radio Head Set Cat. No. 843.



Framingham Vernier Rheostats.



Framingham "All Tube" Universal Rheostats.

## ANNOUNCEMENT.

**AGENTS FOR—**

Jefferson Elec. Mfg. Coy.  
Framingham Products.  
Premier Electric Coy.  
Molesworth Crystals.  
Deveau Goods.  
Russell Fraser Wire Coy.  
D.A. and Dutilh—Paris.  
Electrad Grid Leaks.

**SOLE N.S.W. SALESMEN FOR—**

Baldwin 'Phones, Loud Speakers  
and Units.

New York Coil Coy.—Condensers.

Complete Stocks of all Radio Goods.

Wholesale only.

# FOX & MacGILLYCUDDY LTD.

DAILY TELEGRAPH BUILDINGS, SYDNEY.

BRISBANE AGENTS: WIRELESS HOUSE, ADELAIDE STREET, BRISBANE.





"No. 41" JEFFERSON  
AMPLIFYING TRANSFORMER

# The Vital Spot In the Radio Set

is the transformer. The advantages of using JEFFERSON TRANSFORMERS are acknowledged by hundreds of thousands of users the world over.

Stability of operation; Freedom from Distortion; Maximum Amplification! Those are the characteristics demanded of transformers, and they are the qualities which have made JEFFERSON TRANSFORMERS the most popular among experimenters!



Introducing Jefferson "STAR"  
AMPLIFYING TRANSFORMER

## FOUR REASONS WHY!

1st.

A Jefferson is scientifically designed.

2nd.

The windings are carefully calculated to produce 100 per cent. amplification—they are not built up to a ratio.

3rd.

The Jefferson line embraces a variety of amplifiers to meet every demand—six Audio and two Radio Frequency types.

4th.

As pioneer transformer manufacturers, Jefferson Engineers designed audio amplifiers long before Radio reached its present popularity. You will appreciate Jefferson's extra years of experience.



### What's Inside

THE most important thing to know about an amplifier is "What's Inside." Outwardly there is little vital difference, inwardly there's all the difference in the world—the difference between clear, mellow reception and poor reception full of squeaks and squawks.

Many radiolists unconsciously put the "squeaks and squawks" into their set through the use of improper transformers. They have yet to learn that "RATIO" means absolutely nothing—that 10 to 1, 9 to 1, etc., do not spell maximum amplification.


## Buy an Amplifier

For what it will do—  
The Service it will  
render—

The tone and volume  
it will produce—

## Results Count!

You introduce 100 per  
cent scientific efficiency  
into your set when you  
instal



"No. 45" JEFFERSON  
Amplifying Transformer



JEFFERSON RADIO  
Frequency Transformers

Sole Agents for Australia:

(Framingham Products)

## Fox & MacGillicuddy Limited

Daily Telegraph Buildings KING ST., SYDNEY  
Phone: CITY 3062.

World's Leading Transformers

stocked by Colville-Moore, Radio House, Radio Co., A. Hordern and Sons, Ramsay Sharp, Universal Electric, Wireless Supplies Ltd., Harry Wiles, David Jones Ltd., Mark Foys Ltd, Homecrafts, Melbourne; J. C. Price, Brisbane; Adelaide Radio Co.; Burgin Electric Co., Harringtons Ltd., Norris and Skelby, Melbourne; and all Leading Wireless Stores throughout Australia.



# SUPER-HETRODYNE.

By F. Basil Cooke, F.R.A.S.

Before commencing a discussion on the Super-Hetrodyne, it would be advisable to consider what exactly is meant by the term Hetrodyne. An analogy commonly experienced is to be found with musical instruments. Take two violin strings not quite in tune, but nearly so, and set both in vibration. The result is a series of rhythmic loud and silent periods, usually called beats. The number of beats occurring per second is determined by the difference between the number of vibrations per second of each violin string. In other words, if one string vibrates at the rate of 250 per second (middle C) and the other at 255, then there will be 5 beats per second when both strings are vibrating together.

In wireless the number of vibrations per second is determined by dividing the velocity (186,000 miles per second) by the wavelength. Mathematically this is expressed by the equation—

$$v = \lambda \cdot n,$$

where  $v$  is the velocity,

$\lambda$  the wavelength,

$n$  the number of vibrations per second.

This is called the frequency, and for a 300 meter wavelength is just one million.

If, now, two stations are transmitting together and their frequencies (or wavelengths) are only slightly different to each other, then the receiver will hear a note the pitch of which is determined by the beat frequency. In this case one station is said to be hetrodyning the other.

A very practical example of this is nightly experienced when listening-in. With several hundred amateurs all listening round about the same wavelength, and many of these fans having receiving sets which are actually very low-power transmitting stations, it happens that every now and then two of these sets oscillate at very nearly the same wavelength, with the result that the listener-in hears what is commonly called a howling or whistling. As one of the culprits moves his condenser, thereby altering his wavelength, it alters the beat frequency with whom-ever he was hetrodyning, and the very familiar "chirp" is heard.

This phenomenon is taken advantage of in receiving continuous wave telegraphy. The transmitting station



F. Basil Cooke F.R.A.S. Director of Radio Services, David Jones Ltd.

sends out on a certain wavelength, say, 300 meters, meaning that the frequency of electrical impulses at the receiving station is one million per second. Of course, no telephone receiver is capable of detecting such a tremendous frequency, so another local low-power transmitter is put in operation at a frequency of, say, 1,000,500 per second. The result is that there are 500 beats per second produced, which, when detected, gives a nice, clear, musical note in the phones (one octave above middle C). In this case the local station is the hetrodyne.

Since the advent of the valve, circuits have been devised whereby the one valve acts as the hetrodyne as well as the detector. When this occurs the set is said to be oscillating, and unless special precautions are

taken the set in this condition might become a source of annoyance to nearby receivers in that the hetrodyne is re-radiating some of its aerial, so becoming a low-power transmitting station.

In the super-hetrodyne receiver advantage is taken of this hetrodyne action in such a manner that before amplifying the incoming signals at radio frequency, the incoming wave, after one stage of amplification, is hetrodyned to a frequency (beat) corresponding with some pre-determined wavelength, usually 3000 meters, after which it is further amplified at the new radio frequency, then detected; after which it is amplified at audio frequency.

This action is accomplished by using a valve as a separate hetrodyne as the



second valve, and the new frequency passes along for further amplification until finally it is detected at 3000 meters instead of, as originally, in the aerial as 300 meters.

The advocates for this circuit claim that it is extremely difficult to amplify at radio frequency more than with one, or at the most two, stages on low wavelength, but, by changing the wavelength, amplification becomes much easier.

The reason that it is difficult to amplify at low wavelength is; that due to the capacity of the valve the extremely high frequency of the low wavelength sets up harmful oscillations, which prevent clear reception, and the only way of preventing this, other than with the Super-Hetrodyne, is to damp-down these oscillations by neutralising the capacity effects, as in the case of the Neutrodyne, or by adding resistance to the circuit. With respect to the Neutrodyne effect, we will discuss this in a later paper.

**CONCLUSIONS.**

From the above, then, we see that the Super-Hetrodyne has been designed with the object of being able to amplify at radio frequency low wavelengths by changing the wavelength to a higher order, thereby minimising the evil effects of the tube capacity. In order to do this, two perfectly good valves at 35/- each, together with a lot of attendant expensive apparatus, is serving no useful purpose whatever with respect to actual amplification.

Further, the Super-Hetrodyne has no cause for existence except for low wave reception. Again, this circuit, although very stable when once made correctly and understood, is extremely difficult to adjust, so adding enormously to its cost. Special precautions must be taken to ensure proper shielding, even to the extent of wrapping metal foil round the phone cords and earthing same.

For broadcasting reception, the set when eventually made is not one whit better than a good Standard Tuned Anode circuit. Especially is this true for 2F.C. (Farmers' Broadcasting Station), as this station is using a wavelength of 1100 meters, where the Super-Hetrodyne ceases to possess any special virtue.

Summing up, then, the Super-Hetrodyne possesses no special advantage for broadcasting; it is extremely difficult to make, and even more so to adjust. It is very critical and very costly, employing two more tubes than would otherwise be required for the

same work; consequently current consumption is increased.

Very few experimenters in Australia could get the most out of this set, and those few, although spending many interesting hours of high-grade work and possibly receiving very long distances, could very possibly have done just as good work with other less costly circuits.

The Super, then, is really only efficiently useful for very few, and is not a suitable circuit for broadcasting reception.

**Western Australian Notes.**

From our Special Correspondent

**A**N interesting half hour is provided by the Westralian Farmer's broadcasting station, 6WF, every Friday night. Any experimenter may come along to the station and read some matter of interest to the wireless amateurs in general. Recently experimenters had the pleasure of hearing Mr. B. Holt, President of the Committee of Affiliated Radio Societies of W. A., discourse on topical matters. It is safe to say that his audience numbered several thousands.

A matter which is engaging the conversation of many in W.A. at the present time is the proposal of a certain section in the Eastern States to form one broadcasting company which is intended to control all other institutions in the divers States. 6WF strongly disapproves of such a scheme after having expended so much capital, and intends to fight its hardest in preventing the absorption of their company by any Eastern concern.

Our single transmitting amateur, who has for the past two years been carrying on transmission from his station, 6BN, on Wednesday nights, will henceforth be confining his operations to Sunday evenings, beginning at 7.30. Mr. Stevens has a splendid announcing voice, and al-

though his transmissions, as stated before, are on 1 watt, they contain excellent volume.

The Westralian Farmer's broadcasting department received a humorous request from a gentleman recently. It took the form of a letter asking the announcer to broadcast as soon as possible a message to his wife in the country to the effect that he would not be home on such and such a night. The announcer did not broadcast the message.

In the course of a lecture by a Mr. G. W. Wickens, "Seasonable Work in the Orchard", broadcasted from 6WF recently, a telephone message was received at the station. The caller stated that he was receiving the transmissions perfectly. This was at Merridden, about 200 miles distant from Perth. At the conclusion of the lecture Mr. Wickens broadcasted his thanks to the subscriber at Merridden.

Since the last notes appeared some creditable "DX" work has been done by a W.A. amateur. Mr. S. Chambers, of 7 Joseph St., Leederville. He has for some considerable time been receiving Sydney. Farmers Ltd. 2FC with considerable strength too, the music being easily audible behind the transmissions of our own broadcasting station. His set incorporates three valves arranged as a straight out detector, H.F. and L.F. He informs us that the music is readable on even 2 valves. This set has provision for plugging in an extra H.F. and an extra L.F. but he prefers to accomplish long range reception on as few valves as possible.

"It may be of interest to readers to learn that the announcer at 6WF, is Mr. Benjamin Wells, grandson of the famous Benjamin Wells, flautist, who received Royal commands and appeared before the late King Edward VII. This announcer has an exceedingly well modulated voice and "comes-over" splendidly.

(Continued from Page 17.)

quite familiar with your set, and you will be able to work wonders. A loud speaker will go well. While I am writing a loud speaker is barking out sound. It is a Grodan horn and a

Radioceive Unit, which gives me sufficient volume for all the household.

Anyhow, I am sure you are sick of me and this receiver, so with some coil values I will close down. Use the following:—

|                      | Prim. | Sec. | Tickler. | Anode. |
|----------------------|-------|------|----------|--------|
| Amateurs . . . . .   | 25    | 35   | 50       | 35     |
| 2B.L. . . . .        | 35    | 50   | 50       | 50     |
| Commercial . . . . . | 50    | 75   | 75       | 75     |
| 2F.C. . . . .        | 100   | 200  | 150      | 200    |



**Hello Everybody!**

# Wiles' Wonder

SAME QUALITY  
SAME PRICES  
SAME SERVICES

## and Electric

**Construct your own Receiving Set. We supply com**

**SINGLE SLIDE CRYSTAL SET**

150 to 1200 Meters

|  |   |   |   |
|--|---|---|---|
| 1 Impregnated C.B. Tube . . . . .            | 0 | 0 | 6 |
| 2 Maple Ends . . . . .                       | 0 | 2 | 0 |
| 4ozs. 24 Enamel Wire . . . . .               | 0 | 1 | 1 |
| 1 N.P. Slider and Bar . . . . .              | 0 | 3 | 0 |
| 2 N.P. Terminals, Aerial and Earth . . . . . | 0 | 0 | 8 |
| 1 N.P. Detector Unit . . . . .               | 0 | 3 | 3 |
| 1 Guaranteed Crystal . . . . .               | 0 | 1 | 0 |
| 2 Extra Phone Terminals . . . . .            | 0 | 0 | 8 |
| 1 piece Ebonite . . . . .                    | 0 | 1 | 6 |
| 1 Phone Condenser . . . . .                  | 0 | 1 | 6 |
| Aerial Equipment . . . . .                   | 0 | 7 | 0 |

£1 2 2

**DOUBLE SLIDE CRYSTAL SET**

|   |   |   |   |
|---|---|---|---|
| Similar parts as Single Slide Set . . . . . | 1 | 2 | 2 |
| Additional Part: 1 N.P. Slider . . . . .    | 0 | 3 | 0 |

£1 5 2

Construct your own Amplifier to connect to your Crystal Set in order to use a Loud Speaker.

**1 STAGE AMPLIFIER**

|                                    |   |    |   |
|------------------------------------|---|----|---|
| 1 Ebonite Panel . . . . .          | 0 | 2  | 0 |
| 1 Valve Holder . . . . .           | 0 | 1  | 6 |
| 1 Rheostat . . . . .               | 0 | 4  | 9 |
| 1 Transformer . . . . .            | 1 | 7  | 6 |
| 8 Terminals . . . . .              | 0 | 2  | 8 |
| Panel Wire and Solder . . . . .    | 0 | 0  | 9 |
| 1 Amplifying Valve . . . . .       | 1 | 15 | 0 |
| 1 Polished Maple Cabinet . . . . . | 0 | 10 | 0 |
| 1 A Battery . . . . .              | 0 | 6  | 0 |
| 1 B Battery . . . . .              | 0 | 12 | 6 |

£5 2 8

Complete parts for 2 Stage Amplifier, giving double the amplification of a one Valve—  
£8 12 0



**RADIO HEAD SETS.**

|  |   |    |   |
|--|---|----|---|
| Frost 2000 ohms . . . . .                              | 1 | 12 | 6 |
| Frost 3000 ohms . . . . .                              | 1 | 17 | 6 |
| Murdock's 3000 ohms . . . . .                          | 1 | 10 | 0 |
| New System's 4000 ohms . . . . .                       | 1 | 15 | 0 |
| Radiola 4000 ohms . . . . .                            | 1 | 19 | 6 |
| Dictograph, 3000 ohms . . . . .                        | 2 | 2  | 6 |
| Brown's 4000 ohms . . . . .                            | 5 | 5  | 0 |
| Sterling 4000 ohms . . . . .                           | 2 | 4  | 0 |
| Brown's 8000 ohms, adjustable dia-<br>phragm . . . . . | 5 | 15 | 0 |
| Trimm's Professional . . . . .                         | 2 | 5  | 0 |
| Trimm's Dependable . . . . .                           | 1 | 12 | 6 |
| Siemens' 4000 ohms . . . . .                           | 1 | 12 | 6 |
| Western Electric 4000 ohm . . . . .                    | 2 | 4  | 0 |
| Western Electric 8000 ohms . . . . .                   | 2 | 5  | 0 |
| Brandes' Matched Tone . . . . .                        | 2 | 0  | 0 |
| Nutmeg 3000 ohms . . . . .                             | 2 | 10 | 0 |
| Baldwin, with Mica Diaphragm . . . . .                 | 4 | 0  | 0 |
| Baldwin Single Unit . . . . .                          | 1 | 17 | 6 |
| Mel. Single Hand Type . . . . .                        | 0 | 18 | 6 |



# W. Harry Wiles

Stores

384 PITT ST., (opp. Anthony Hordern & Sons Ltd.)  
 60-62 GOULBURN ST. (1 door from Pitt Street)  
 23 PITT STREET. . . . CIRCULAR QUAY

Complete building instructions and advice with each order

**VERNIER CONTROL CRYSTAL SET.**

150 to 1200 Meters

**LOOSE COUPLER CRYSTAL SET**

150 to 1200 Meters

|                                    |        |
|------------------------------------|--------|
| 1 piece Ebonite . . . . .          | 0 4 0  |
| 1 Cardboard Tube . . . . .         | 0 0 6  |
| 1 Cardboard Tube Mount . . . . .   | 0 1 0  |
| 4ozs. 24 Enamel Wire . . . . .     | 0 1 1  |
| 25 N.P. Contact Studs . . . . .    | 0 2 7  |
| 4 N.P. Switch Stops . . . . .      | 0 0 8  |
| 6 N.P. Terminals . . . . .         | 0 2 0  |
| 1 N.P. Inductance Switch . . . . . | 0 2 0  |
| 1 N.P. Detector Arm . . . . .      | 0 3 0  |
| 1 N.P. Crystal Cup . . . . .       | 0 0 10 |
| 1 Guaranteed Crystal . . . . .     | 0 1 0  |
| 1 Phone Condenser . . . . .        | 0 1 6  |
| Panel Wire and Solder . . . . .    | 0 0 9  |
| Polished Maple Cabinet . . . . .   | 1 0 0  |
| Aerial Equipment . . . . .         | 0 7 5  |

£2 8 4

|   |       |
|---|-------|
| 1 pair Cardboard Tubes . . . . .            | 0 1 0 |
| 1 Set Maple Ends . . . . .                  | 0 2 6 |
| 1 Maple Base Board . . . . .                | 0 4 0 |
| 8ozs. 24 Enamel Wire . . . . .              | 0 2 1 |
| 10 N.P. Slider and Bar . . . . .            | 0 3 0 |
| 10 N.P. Contact Studs . . . . .             | 0 1 1 |
| 2 N.P. Switch Stops . . . . .               | 0 0 4 |
| 1 N.P. Inductance Switch . . . . .          | 0 2 0 |
| 1 piece Ebonite . . . . .                   | 0 1 6 |
| 1 N.P. Detector Unit . . . . .              | 0 3 3 |
| 1 Guaranteed Crystal . . . . .              | 0 1 0 |
| 1 each Aerial and Earth Terminals . . . . . | 0 0 8 |
| 2 Extra Phone Terminals . . . . .           | 0 0 8 |
| 1 Phone Condenser . . . . .                 | 0 1 6 |
| 2 Secondary Rods . . . . .                  | 0 1 6 |
| 1 Slider Support . . . . .                  | 0 0 4 |
| 1 yard Flexible . . . . .                   | 0 0 3 |
| Aerial Equipment . . . . .                  | 0 7 5 |

£1 14 1

**OUR GUARANTEE**

It is our intention that every article in this list shall be truthfully described. Therefore, we guarantee everything you buy from us to be satisfactory to you in every detail.

You take no risk whatever in sending us your order, for unless you are completely satisfied with the goods and your saving, you may send back everything you buy from us and we will promptly return your money and all transportation charges you have paid.

Please address all communications to our  
 Head Office, 60-62 Goulburn Street.

# W. Harry Wiles

Radio and Electrical Supplies

ESTAB. 20 YEARS



# The Relation of the "C" Battery to the Amplifier Tube.

Newcomers in the field of wireless are frequently guided in their choice of apparatus by results which they observe on other people's receivers. The average amateur who builds his own set and uses a stage or more of amplification is for a time troubled with the question of tuning, and this takes a little while to overcome. A little touch of the condenser or the coil-holder, and a medley of squawks and howls is heard, or the music becomes distorted. First impressions are everything to the newcomer, and reception marred by the harsh factors of distortion tends to drive him away, rather than attract him to wireless.

This article, therefore, is designed to show why the use of a "C" battery will eliminate distortion in the vacuum tube as an amplifier, and just how it affects the tube.

Distortion is seldom present in a one-stage amplifier, but with two or more stages of radio-frequency amplification it is only too noticeable. Why is that so?

Figure 1 shows the layout of a two-stage amplifier. Look it over. What point or points could distortion occur in? If you are familiar with the functioning of this apparatus you would

answer that the probable parts are the transformers and the bulbs. Quite true. If a transformer, to take the instruments in their order of sequence, is improperly designed distortion will certainly manifest itself therein. But in this age we have transformers that will operate efficiently over a given band of frequencies. Those instruments being eliminated, we have only the tubes to suspect.

To understand how distortion occurs in the vacuum tube, as an amplifier, a brief resume of the characteristics of the vacuum tube had best be dealt with.

To start at the beginning, a vacuum tube is composed of three elements: a filament, a plate, and a grid, supported in a vacuum container. When the filament is made incandescent by means of the "A" battery, electrons (the smallest indivisible particles of matter known to science) will be emitted by it. If the plate of the tube is given a positive charge with the "B" battery, these tiny electrons will be attracted to it in very large numbers. When the positive charge is increased, the number of electrons flowing from the filament to the plate will increase. If the charge is fur-

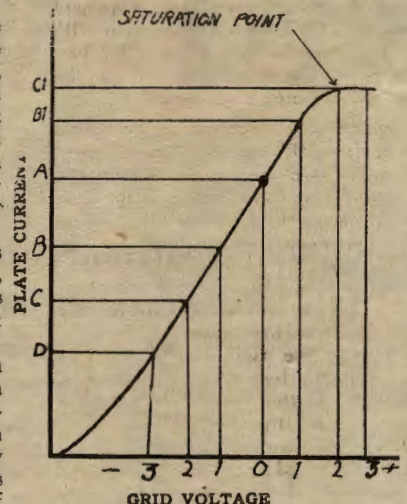


Figure 3

ther increased, still more electrons will speed to the plate. But there is a point where any further increase of positive potential will not result in augmented electronic flow. This state is known as the *saturation point*. Around it are built the reasons for distortion in the vacuum tube as an amplifier.

Over this electronic flow the positive current impressed on the plate by the "B" battery will pass. When the plate voltage and the filament current are maintained constant, a definite number of electrons will pass and a fixed number of milliamperes will flow in the plate circuit.

Now for the grid element. This may be regarded as the key to the action of the tube. When a negative charge is placed upon the grid, the electron current is susceptible to more or less obstruction, depending on the grid voltage. And, when the grid carries this charge into the electronic region, the plate current is varied, because it depends on the electron flow for its progress to the filament. When the charge on the grid is positive, the result is just the opposite. Therefore, the electrical pressure on the grid regulates the passage of current in the plate circuit. Consequently, the current in the plate circuit, supplied by the "B" battery, is a dupli-



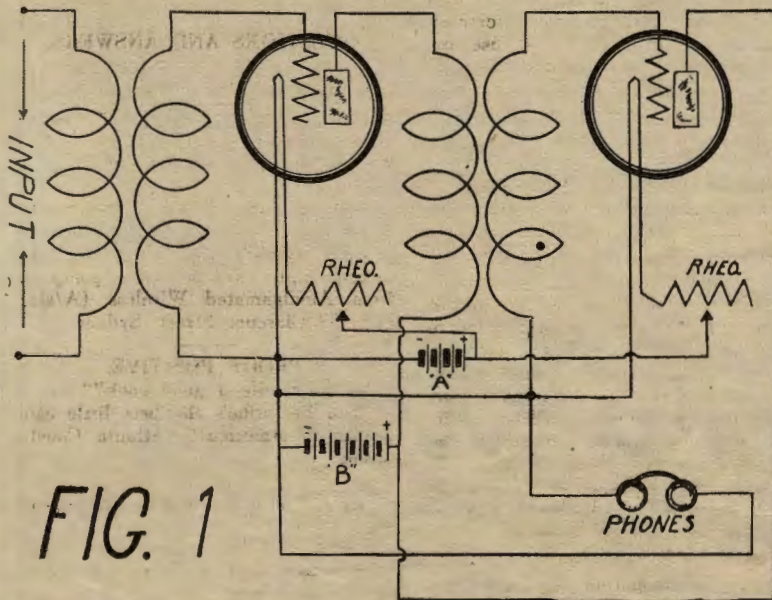


FIG. 1

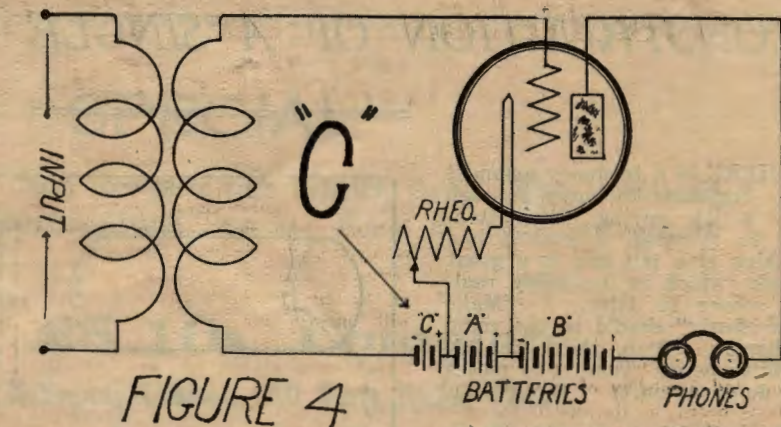

cate in greatly increased amplitude of the current impressed on the grid. The pressure on the grid is that of the incoming radio signal. That is how it is "amplified." The current that actuates the diaphragms of your receiver really doesn't come from Pittsburg or Schenectady (or anywhere else) at all. It comes from your "B" battery. But the flow of the "B" battery is regulated (by means of the grid) by the incoming signal.

Consider the diagram at Figure 2. The point "O" on the heavy, lower horizontal line, represents a pressure of nothing on the grid. Trace this line upwards till it meets the dot on the curve, thence left to the point "A" on the heavy vertical line marked Plate Current. "A" represents a certain value of current flowing in the plate circuit. Now follow the line "1" positive—to the right of "O"—on the grid voltage bottom line, upwards, then left to the point "B1" on the plate current line. It will be noted that an increase of current has resulted in the plate circuit, occasioned by a change of the grid voltage. The line "1" negative, when traced upwards to the curve and across to the plate current line "B," shows a corresponding decrease of current flow in the plate circuit. The grid voltage points "2" positive and "2" negative show the increase and decrease of the plate circuit current in the same proportion, but in greater amplitude. Therefore, the plate current is uniform. This curve (Fig. 2) serves to illustrate the plate current in respect to the grid voltage in the first ampli-

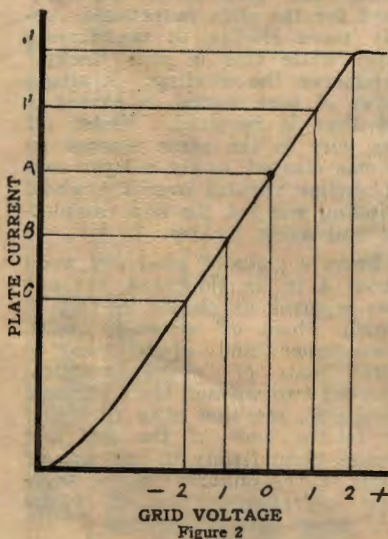

fier. It will be seen that it is working properly; the grid voltage is reproduced in the plate circuit without distortion.

Now glance at Figure 3 with the explanation about the saturation point in mind. Again, as in Figure 2, the point "O" on the grid voltage results in a definite current flow in the plate circuit. The points "1" and "2" positive, and "1" and "2" negative, have the same plate current increase and decrease significance. But, in this case, we have a higher amplitude point impressed upon the grid, because the input is amplified by the first tube. At the negative side of the "zero-line" on the grid voltage we have the point "13." This is reproduced faithfully in the plate current at the "D." But what about the positive increase? Look at the diagram. Because the saturation point is reached at the grid voltage positive point "2" no more electrons are attracted to the plate, therefore no more current can flow in the plate circuit.

What is the result? It is simply a lop-sided plate current, as it were. Its amplitude is greater with the negative impression "3" than it is with the positive impression "3."

Now, what we must do, of course, is even up these positive and negative amplitudes, so they will give an even current in our phones or loud speakers. It is obvious that the plate current must be lowered. This can be done with an outside resource. The most economical source is the "C" battery. Its purpose is to simply lower the rate of electronic flow so that the plate current passing over it will be uniform at all times.

This transformation converts the plate current to the well-regulated

state illustrated in Figure 2.

Figure 4 shows the relation of the "C" battery to the other parts of the second stage audio-frequency amplifier. It should not be used if no distortion of signals is experienced. If utilised, the "C" battery greatly conserves the life of the "B" batteries, and will pay for itself in that way. High "C" voltage should not be used with U.V. 199 and C. 299 tubes. The following gives directions for the "C" battery voltage to be employed:—

|                     |                     |
|---------------------|---------------------|
| "C" Batt'y Voltage. | "B" Batt'y Voltage. |
| .25 to .05          | 22.5                |
| .05 to .09          | 45.                 |
| 1. to 2.5           | 60.                 |
| 3.0 to 4.5          | 90.                 |
| 4.5 to 8.           | 110.                |

QUESTIONS AND ANSWERS.

A.R.B. (Croydon): Practically any two-valve set may be added to with further valves, and there would be no necessity to scrap any part of it. Can we help you out with the circuit?

Experimenter (Bondi): We recommend the U.V.199. The Freshman is a good variable leak. Yes, you may obtain copies of the valve pamphlet from Amalgamated Wireless (A/sia) Ltd., 97 Clarence Street, Sydney.

PROOF POSITIVE.

"Is your wife a good cook?"  
 "You bet! She's the best little can-opener in America!"—Atlanta Constitution.

Cop—"You're pinched for speeding."


Copped—"What's the big idea? Doesn't that sign say 'Fine for speeding'?"—Sun Dial.



# CONSTRUCTION OF A SINGLE SLIDE TUNER.

**T**HERE is a tendency amongst beginners to hurry through a job, paying more attention to "getting it over" than anything else, but this is a great mistake which is inevitably realised sooner or later. "Make haste slowly" should be the radio mechanic's slogan, the usual alternative being "Take it to pieces and do it again."

The cylindrical or solenoid inductance is undoubtedly the most popular type amongst beginners. The construction presents very few difficulties, it is very efficient, and even in its most simple form can be made continuously variable. An example of this is shown in Fig. 4, where B. represents the slider with spring plunger, and C. the rod. It will be obvious that if one end of the coil is connected to the aerial, and the slider, or one end of the rod to earth, then only the amount of winding between the end of coil and slider is actually in use. Thus by moving the slider in either direction the inductance can be varied to any desired amount and "tuned in" to the wave-length required. The "former" on which the wire is wound is usually a cardboard cylinder

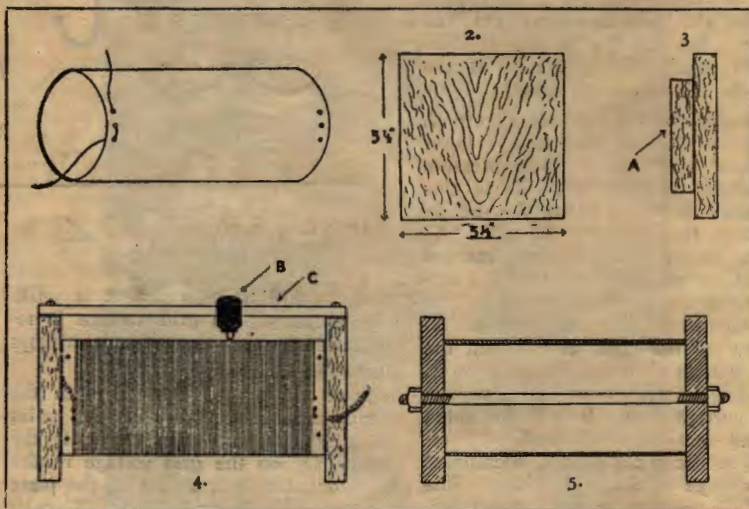


12 in. long and 3½ in. or 4 in. in diameter, previously dried in the oven and given at least 4 coats of shellac varnish inside and out. Each coat should be allowed to dry out thoroughly before applying the next. Ebonite is always preferable, but the cardboard cylinder properly prepared makes an

excellent substitute.

Pierce three holes in each end of the cylinder about half an inch from the extreme edge and "anchor" the wire as shown in Fig. 1, leaving a free end of about 12 in. for connecting up purposes. The wire, which is enamelled may be of any suitable guage, No. 22 being the size most generally used for the slide inductance. Apply more shellac to the former then while this is still "tacky," commence the winding. A single layer of wire wound on evenly is all that is required. Finish off the wire in the same manner as it was started, apply a light coat of shellac varnish over the whole winding and put the now completed coil aside to dry.

From a piece of good dry wood about ½ in. in thickness, cut out two squares as shown in Fig. 2, finish them off smoothly with glass-paper and apply two or three coats of shellac varnish. Cut out two wooden discs of same thickness, see that they fit tightly in the ends of the coil and secure them firmly to one side of each of the squares in the position indicated in Fig. 3, where "A" represents the disc.

(Continued on Page 30.)

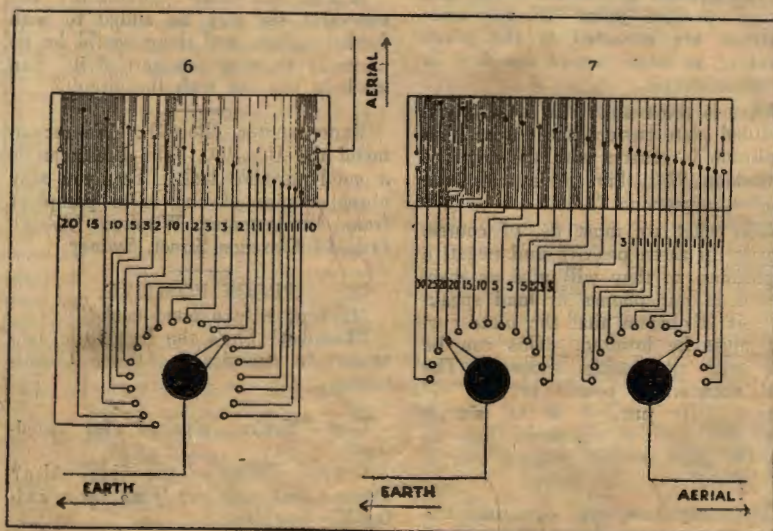



# SPECIAL

**CRYSTAL CABINET SET** complete with Phones, Aerial Wire, Insulators and Condenser. Guaranteed and Tested. Equal in Signal strength to Single Valve.

**Only £5 10s. Complete**


In Polished Mahogany Cabinet, All Parts Nickel Plated.

**Single Valve Set £10 complete**

## ELECTRICITY HOUSE

387 GEORGE STREET

J. S. MARKS, 2 G R Manager



Masts, wood and steel, any size from 20 ft. to 200 ft.; Aerial Wire; Insulators; Spreaders; Ash and Metal Hoops, all sizes; Rigging Wire; Screws; Hal-yards; Anchor Pegs; Trucks, etc.; Wireless Cabinets, any design; Port-able Poles and Aerials, a speciality. Flags of all Nations and designs.

Prices on Application.

**E. H. BRETT & SONS LTD.**

LITTLE AVENUE. BALMAIN EAST

Phone W 1205



# South Australian Notes.

(From Our Special Correspondent.)

So far as wireless is concerned, South Australia is at a great disadvantage, both for the dealer and the listener-in, they having to practically depend on the experimenter for introducing wireless to the public and providing the entertainments. Several attempts at broadcasting have been made, but they have been failures.

The South Australian experimenters have been equal to the task, however, and the amount of radio gear sold by the various dealers is, no doubt due to their splendid performances. They are equal to any experimenters the world over, as can be seen by the meritorious records created by them in both transmission and reception.

Foremost amongst these are Mr. L. C. Jones, 5BQ, whose fine radiophone concerts on Sunday evenings have been enjoyed in every State of the Commonwealth and in New Zealand.

Mr. F. L. Williamson, 5AH, whose CW signals have been received in U.S.A., and Mr. Ray Snoswell, 5AG, who has quite a number of fine DX records, including his recent successful transmission to Perth, W.A.

In times past Mr. Harry Kauper, 5BG, and Mr. W. J. Bland, 5AG, have put up some fine performances in both transmission and reception.

S.A. experimenters living west of the Mount Lofty ranges are badly handicapped, as those on the eastern side can get signals through from the Eastern State transmitters exceedingly strongly on a single valve set, while those on the western side need to use amplification for the same signals, although 2FC and 2BL come in well on one valve, as also do quite a number of the interstate transmitters.

One S.A. experimenter, Mr. J. Williams, of King's Park, states that 2FC is just audible on his crystal set, but with the addition of a 2-stage LF amplifier the speech and music are quite clear.

## A NEW CIRCUIT.

What with Neutrodynes, Ultradynes, Monodynes, and a host of other dynes, experimenters just entering the radio field are likely to become somewhat mixed.

At least one S.A. beginner has informed me that he is going to try the Super-Iodine circuit. Before taking up wireless he was an amateur quack, so perhaps he intends to combine wireless with surgery.

## THE MARCONI BALL.

A Marconi Ball in aid of the Children's Hospital appeal was held in the Liberal Club Hall on Wednesday evening.

The hall presented a gay appearance, being tastefully decorated with palms, orange trees and olive branches. Balloons and flags in the Italian colors completed the decorations, and Italian costumes were worn by those taking part.

Hundreds of imitation oranges filled with confetti were tied on to the trees, and caused great excitement in the battle of fruit at the conclusion of the supper, which was served in the Pac-

cadilly Cafe downstairs.

A wireless receiving set was installed in the hall, and musical items were transmitted from the studio of the South Australian Radio Co. Special items were rendered by the whistling violiniste, Miss Elsa Lewis, and Mr. Jack Fewster's orchestra played the latest dance music.

Showers of confetti were blown all over the hall like a snowstorm by a powerful electric blower.

The committee responsible for the arrangements were Misses S. MacMillan, L. Larsson, R. Blewett, H. Howard, F. Creasy, K. Martin, H. Olsen, and Messrs. H. Walsh, O. Ziegler, W. Runge, L. Frayne, M. Skinner, C. Bowman, R. Leak, H. Martin, V. Treloar, F. Doolette, and the joint secretaries, Miss Phyllis Everett and Mr. W. B. Morrison.

## TO BEGINNERS IN WIRELESS.

**H**ALF the fascination of Wireless lies in the making of your own set at home. The problem of what to make and HOW to make it is often a difficult one. Here are a few back numbers containing articles which will interest you. As we have only a limited number of each one, it is advisable to get in early.

Single copies, 4d.; Two copies, 9d.; Three copies, 10d.; Four copies, 1/-; Five copies, 1/3; Six copies, 1/6, post free. Just drop a line to "Wireless Weekly," 33/37 Regent Street, Sydney, enclosing stamps, and we will mail them immediately to your address.

"The S.T. 100 Receiver," by W. L. Hamilton ("Wireless Weekly," March 7th), showing all the details for the construction and operation of the famous ST 100 2-valve receiver. This set is acknowledged to be one of the most efficient for Broadcast reception. It is easily built, and reproduces music and speech with wonderful volume and clarity. The construction of this receiver, including cost of all parts, will not involve an expenditure of more than £15.

"A Highly Efficient Loose Coupler," by "Insulator" ("Wireless Weekly," March 21st). This article shows step by step the building of a loose coupler that will give splendid results on Broadcasting and Spark Signals. The method of winding the primary and secondary, number of turns, how to make tapings, etc., is very clearly shown. The construction of this loose coupler will not cost more than 35/-.

"Crystal Detector Unit," by "Insulator" ("Wireless Weekly," March 28th), illustrating clearly the construction of a home-made crystal detector (costing about 5/-) to use in conjunction with the loose coupler described above.

"A Valve Panel," by "Insulator" ("Wireless Weekly," April 11th), showing how to make an efficient one-valve receiver. Clearly illustrated and easy to follow.

"A Crystal Set for 5/-," by "Insulator" ("Wireless Weekly," April 17th). This article explains the construction of a crystal set for Broadcast reception, at a total cost of 5/-.


"Honeycomb Coils," by "Insulator" ("Wireless Weekly," April 25th). A splendid description of the winding of home-made Honeycomb Coils. Every detail clearly explained. The article contains a table showing the number of turns required for primary, secondary and tickler coils for all wavelengths from 120 to 25,000 metres.



# BROADEN YOUR RANGE



"All-American" amplifying transformers are designed to give maximum volume, with clear, pure, and distortionless tone. Being quiet in operation and free from extraneous noises, music and speech, from distant broadcasting stations, can be reproduced through good loud speakers with wonderful exactness. Electrically correct, splendid examples of high-class workmanship, from the best materials, built by experts, rigidly inspected, and given exhaustive tests before leaving our factory. Every "All-American" transformer is guaranteed to be electrically and mechanically perfect.

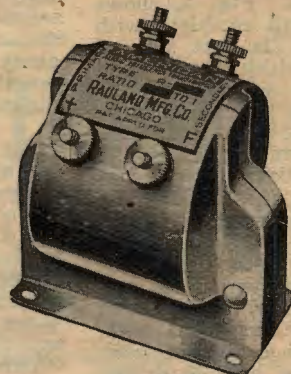

SHIELDED AUDIO  
FREQUENCY TRANSFORMER  
TYPES R-12-13-21

## TRIMM "DEPENDABLE" RADIO HEAD SET 2400 ohms

EXPERIMENTERS -- TRY THIS  
WONDERFULLY LOW PRICED  
PHONE -- PRICE 32s. 6d. EACH



# BAKELITE DILECTO

ELECTRICAL MANUFACTURERS, WIRELESS EXPERIMENTERS AND OTHERS  
DO YOU USE THE THE BEST INSULATION ?

LET "BAKELITE" SOLVE YOUR INSULATION PROBLEMS.

- "BAKELITE" is a higher insulator than Ebonite and is mechanically stronger.
- "BAKELITE" can be cut, drilled, turned or milled, and will take a high polish.
- "BAKELITE" does not crack, warp, nor discolor with age.
- "BAKELITE" stands the highest electrical tests, practically universal for wireless work,
- "BAKELITE" is made in Sheets, Rods, or Tubes.

Obtainable from Australian General Electric Co., Wentworth Av.; Mark Foy's Ltd., Sydney; Electric Utility Co., 619 George St.; Anthony Hordern and Sons Ltd., George St.; F. E. O'Sullivan, 296 Pitt St.; Ramsay Sharp and Co., Ltd., 217 George St.; Radio Co., Ltd., 15 Loftus St.; Colville-Moore, 10 Rowe St.; Wireless Supplies, Ltd., 21 Royal Arcade; Miss F. E. Wallace, 6 Royal Arcade; W. H. Wiles, Goulburn St.; David Jones, Ltd., George St.; Burgin Electric Co., 391 George St., and all Wireless Supply Houses.

O. H. O'BRIEN & NICHOLL (Sydney)

Phone 3302 City

37-39 Pitt-street

Phone 10592 City



(Continued from Page 25.)

The two coil supports are now complete, and the coil may now be mounted to the discs by means of small screws. Fig. 4, shows the mounted coil complete with slider and rod. The left side of the winding, which is a "dead end" should be attached to the support with a screw and the other end on the right connected to the aerial terminal. Along the line where the slider plunger makes contact with the winding the enamel insulation must be scraped away.

An alternative method of mounting the coil is shown in the sectional diagram Fig. 5. The two wooden discs are dispensed with, and through the centre of each square support a hole is drilled to take a length of threaded brass rod. The ends are then clamped to the coil by means of two nuts secured to the protruding ends of the rod.

A simple tapped inductance for the short wave receiver is shown in Fig. 6. Here the sliding contact is dispensed with and the tappings taken off the winding to a multiple switch. This method ensures a more efficient electrical contact, and is perhaps easier to manipulate than the slider, but where it is possible to "tune in" to a single turn of wire anywhere along the coil with the slider, this will not be possible with tappings unless of course a tapping is taken off at every single turn, in which case the arrangement of the contact studs would present an insurmountable difficulty. For every tapping one contact stud will be required, and a switch arm of 1½ in. radius will usually take about twenty contact studs. We will assume that the ebonite panel has been marked off, drilled and fitted with the switch arm and twenty contact studs, and that the cabinet is large enough to accommodate the coil. Obtain a cardboard cylinder 3 in. or 3½ in. in diameter, and about 6 in. long and prepare it as explained above. The tappings commencing from the left of coil (Fig. 6.) are arranged as follows:—

The end of the winding is counted as one tapping. Wind on 20 turns of wire (No. 22 or 24) and preferably double cotton covered, and take off the first tapping. The wire is held firmly against the tube with one hand while a loop about 1 in. long is twisted with the other. See that the loop

stands out at right angles with the tube, and that it shows no signs of untwisting. Proceed as before, and when another 15 turns have been wound on, take off the second tapping. The tapping should not run in a straight line along the coil, but should be staggered as shown, each one being slightly out of line with the other.

The remainder of the tappings are arranged as shown in the diagram. The number of turns between the last tapping and the end of winding on the right will be best determined by carefully noting the number of turns employed on a single slide inductance of the same diameter when say 2BL is accurately tuned in.

This station will transmit on low wave lengths; we will assume that the aerial is permanently fixed and that when signals are loudest the slider plunger is resting on the fifteenth turn from the end of the coil. To eliminate risks reckon the fifteenth as ten and allow ten turns between the last tapping and the aerial terminal.

The insulation is now carefully removed from the loops and a length of fairly stiff copper wire soldered to each. Insulating sleeving is now placed on these connecting wires and the end attached to the contact studs. An alternative method of connecting is to make the loops long enough to reach the contact studs and employ a larger size sleeving to cover double wire. Another method of arranging the tappings is shown in Fig. 7, where two multiple point switches are employed, the one on the left for coarse tuning, and the other on the right for fine tuning. In this case both ends of the winding are connected to contact studs. It will be seen that a much finer tuning can be obtained by this arrangement.

## THE B. B. C.

### 2LO COSTS £12,000 ANNUALLY

THAT all things considered, the quality of Australian broadcasting is superior to that of the B.B.C.; is the opinion of Mr. F. C. McDonald, late of the B.B.C. station 2LO, London. Mr. McDonald, who has an intimate and first hand knowledge of wireless activities in Great Britain, has just arrived from London to take up permanent residence in Australia.

Some interesting details of the operation of 2LO, were given us by Mr. McDonald, and among them was the fact that the yearly cost of the upkeep of this station, including all payments to artists, is in the near vicinity of £12,000. The permanent staff comprises the station manager, announcer, operator, assistant operator, electrician, orchestra, restaurant staff, studio caretaker, and doorkeeper. All the above are paid.

According to Mr. McDonald, the programme that is to be put over during the evening session is carefully rehearsed in the afternoon, and in order not to put the performers to expense and so that they may not be late, they are given dinner at the restaurant, adjacent to the studio. In the palm court they sit and chat until their particular turn comes.

Up to the end of 1922, all artists broadcasted by 2 LO gave their services entirely free, but this was put an end to by the Theatrical Employees' Association which prohibited members from singing, etc., unless they were paid. Local unpaid talent was then made use of, but with very unsatisfactory results. Arrangements were then completed between the B.B.C. and several theatres for broadcasted of theatrical entertainments, at the same time, the B.B.C. announced that all artists broadcasted from the studio would be paid.

The fees, however, are not such as to awaken avaricious desires in the breasts of ambitious entertainers, and in the case of bands, for instance, Mr. McDonald states that the payment per head for an evening's performance works out at something like 5/-. The highest fee paid by 2LO is to the Lavaña Jazz Band, which is broadcasted occasionally from the Savoy Hotel. Artists such as George Robey, Gertie Gitana, etc., receive only a nominal sum and it is commonly believed that they donate these payments to the hospitals.

Theatres which are regularly put "on the air" are the Alhambra, Palladium, Shaftesbury, Coliseum, Hippodrome, and Drury Lane. Negotiations are proceeding for the linking up of the Houses of Parliament and it is anticipated that at an early date speeches in the House will be broadcasted from 2 LO.



# MICK SIMMONS LIMITED

---

THE firm of Mick Simmons Ltd. has for years been well known to residents of Sydney and throughout Australia.

Amateurs and all those interested in wireless will be pleased to learn that arrangements have now been finalized for the opening of a

## Wireless Department

at the Headquarters, 720 George Street, Haymarket

It is anticipated that the Wireless Department will be available to the general public as from MONDAY, 29th JULY, and large stocks of all modern wireless apparatus will be available.

Stocks will include complete Valve and Crystal Receiving Sets, parts, aerial equipment and all accessories necessary for broadcast reception.

The name of Mick Simmons Limited has always been synonymous with quality consistent with reasonable prices.

*Mick Simmons Ltd.*

THE WORLD'S GREATEST SPORTS STORE  
Headquarters: HAYMARKET, SYDNEY





**THE LEICHHARDT AND DISTRICT RADIO SOCIETY.**

Members of the Leichardt and District Radio Society held their 90th general meeting at the club room, 176 Johnston Street, Annandale, on Tuesday, July 22nd.

The attendance was excellent, and a very interesting and instructive lecture on "Tuning" was delivered by Mr. R. C. Caldwell. The lecturer dealt principally with the use of the ordinary earthing system, counterpoise 'earth,' and the use of no earthing system at all, each method being explained and elaborated upon, and its various advantages and disadvantages discussed at length. The usual crop of questions were answered by Mr. Caldwell, after which a vote of thanks was carried.

Next Tuesday night the society will hold its 22nd monthly business meeting, when a number of new applications for membership will be dealt with, and other formal business on hand disposed of.

The syllabus of lectures arranged at the beginning of this year having been successfully carried through with, a new and more comprehensive one has been compiled, and details will be published in the society's report in these columns in next issue.

Mr. E. J. Fox, a member of the society, has been successful in copying C.W. Morse transmitted from station 6.01 (Western Australia), a two-valve set—detector and one stage of audio amplification—being used.

Inquiries regarding the activities of the society are welcome, and should be addressed to the hon. secretary, Mr. W. J. Zech, 145 Booth Street, Annandale.

**THE STRATHFIELD DISTRICT RADIO CLUB.**

The eighteenth general meeting of the club was held at the club rooms on Thursday, 24th July. Mr. Jacob being in the chair. Upon declaring the meeting open, the President, in commenting upon the death of Mr. B. Rourke, moved that a letter of sympathy be sent to the relatives, and this

was carried unanimously, the members standing for two minutes in respect to the memory of Mr. Rourke.

The minutes of the previous meeting were read and confirmed, and general business was brought forward. Preliminary arrangements were made for a grand concert to be held at an early date in the Burwood School of Arts.

The Artarmon Glee Club has kindly promised to assist, and several of the artists have offered their co-operation.

The secretary of the club would be glad to welcome suggestions from any experimenter in the direction of making this concert a huge success.

A receiving set consisting of five valves, made up of five separate units, is now being built by the club members, and the tuning and detector units are in course of construction.

After lengthy discussions, the circuit decided upon by the committee is the P.1.

Any person interested in wireless research work is invited to come along any Thursday night to the club room, which is situated at the corner of Albert Road and Duke Street, Strathfield, or communicate with the secretary, Mr. M. Wraxall, 'Almor,' Long Street, South Strathfield.

in other countries. An arresting example used by the lecturer was "that at the present rate of progress we shall shortly have world-wide radio. What will the DX artist do when he wishes to communicate with an amateur in a country whose tongue is other than English? Get an interpreter or try him with Esperanto." The meeting closed with a vote of thanks to Mr. Taylor.

The club meets every Wednesday in future. Would members and intending members kindly note?

A syllabus of lectures is being drawn up, the first to be delivered on Wednesday, 6th August next.

Experimenters and others interested are invited to communicate with Hon. Secretary A. Cameron, 'Ogilvie,' Clanwilliam Street, Chatswood.

**WAVERLEY RADIO CLUB.**

Mr. E. Bowman presided at the meeting held on July 22nd. The correspondence included a letter from "Wireless Weekly" in reference to details of the club's transmission. These would be furnished, although it was mentioned that no regular schedule of transmitting times could be given yet.

Further reference was made to the competition for the best crystal set,

**AUSTRALIA-ENGLAND TESTS.**

Arrangements have been made by the N.S.W. Division of the Wireless Institute of Australia for tests between Australian and British experimenters.

The schedule is outlined below, and experimenters are requested to send particulars of results to the Hon. Secretary, Wireless Institute of Australia, Box 3120, G.P.O., Sydney, so that they may be officially forwarded to London.

| Station.        | Wavelength.         | Time GMT.      | Dates.                           | Call Up.          |
|-----------------|---------------------|----------------|----------------------------------|-------------------|
| 6 XX            | 115 metres          | 11.00 to 11.30 | 29/7 to 2/8 and 10/8 to 25/8/24. | VH 1 VH de G 6 XX |
| 2 SH, 2 OD )    | ) 85 to 110 metres- | 8.30 to 10.30  | 28/7/24 for 14 days.             | AG or ZG          |
| 2 JW, 2 VW )    |                     |                |                                  | de                |
| 5 FS and 5 KO ) |                     |                |                                  | G 2SH-etc.        |

In both tests a code word will also be transmitted.

**THE NORTHBRIDGE RADIO CLUB.**

The ninth general meeting of the above club was held at the club room, "Hoylake," Sailor Bay Road, Northbridge, on Wednesday, 23rd inst.

Those present spent a most interesting evening listening to Mr. Frank Taylor, president of the Sydney Esperanto Society, who gave a lecture on "Esperanto—its Relation to Radio." Mr. Taylor explained the necessity for an auxiliary international language, and briefly outlined the progress made

points to be awarded on the basis of appearance, efficiency and cost, with 10/- as the maximum expense. Marks would be forfeited for any outlay over this amount.

Two new members, Messrs. Scott and Wilcock, were admitted into the club.

Mr. W. Anderson suggested that Thursday night lectures and buzzer practice be held. Discussion on this, however, was postponed till there should be a larger meeting.

(Continued on Page 43 Col. 3)



# DAVID JONES'

## for all RADIO EQUIPMENT

### at moderate prices.

With wireless reception assured, the building of private Radio sets has become tremendously popular. The best of expert advice is obtainable at David Jones', and an extensive stock comprising the best makes of wireless apparatus priced with moderation. Also sets are built to customers' requirements by Radio experts. The efficiency of David Jones' Wireless Sets is well demonstrated by the great number now in constant use throughout the country.

Accumulators. Exide and U.S.L. All capacities. Price, 2 volt cell, from £1/1/- to £2/10/-

Aerial Wire, 3/20. Price, 100 ft. .... 3/-  
Indoor Aerials: "Antenella Attachment." Price ..... 7/6

Loop Aerial. Price ..... £2/17/6  
"B" Batteries. Price, 40 volt unit, from ..... 12/6 to 28/-

Buzzers. Price ..... 5/6 and 18/6  
Bradleystat and Bradleyleaks. Price, each ..... 12/6

Blow Lamps, for soldering). Price.. 5/- and 10/-

Bakelite, 1/2 inch. Price, square inch, 1d.  
Bakelite, 3/16 inch. Price ..... 1 1/2d.  
Battery Charges. Price, each .. £8/10/-

Honeycomb Coils—

| Size. | Igranite m'ted. | Giblin Remler un'm'ted. | Wavelength with .001 condensers. |
|-------|-----------------|-------------------------|----------------------------------|
| 20    |                 | 5/-                     | 63—334 metres                    |
| 25    | 10/-            | 5/3                     | 75—389 metres                    |
| 35    | 10/6            | 5/6                     | 128—550 metres                   |
| 50    | 11/-            | 5/9                     | 185—785 metres                   |
| 75    | 11/6            | 6/3                     | 266—1170 metres                  |
| 100   | 12/6            | 6/6                     | 358—1550 metres                  |
| 150   | 14/-            | 7/-                     | 512—2320 metres                  |
| 200   | 15/6            | 7/6                     | 690—3110 metres                  |

Fixed Condensers. All sizes. Price, from ..... 3/- to 5/6

Variable Condensers—

| Size. | Gilfillan. |          | K. & C. |          |
|-------|------------|----------|---------|----------|
|       | Plain.     | Vernier. | Plain.  | Vernier. |
| .001  | £1/12/6    | £2/9/-   | £1/12/6 | £2/2/-   |
| .0005 | £1/10/-    | £2/3/-   | £1/5/-  | £1/15/-  |
| .0003 | £1/8/6     | —        | —       | —        |
| .0002 | £1/4/6     | —        | —       | —        |
| .0001 | £1/2/6     | —        | —       | —        |

| Master. |          | United. |          |
|---------|----------|---------|----------|
| Plain.  | Vernier. | Plain.  | Vernier. |
| £1/12/6 | £2/2/-   | £1/6/6  | £2/9/-   |
| £1/5/-  | £1/15/-  | £1/2/6  | £2/2/-   |
| £1/2/6  | —        | —       | —        |
| 17/6    | —        | —       | —        |
| 15/6    | —        | £1/10/- | —        |

Coil Holders. Remler. No. 40. Price ..... 14/-

Coil Holders. Remler. No. 48. Price ..... 4/3

Coil Holders. Remler. No. 49. Price ..... 6/6

3 Coil Mountings. Unassembled. Price ..... 15/6

3 Coil Mountings. Table. Price .. 40/-

2 Coil Mounting. Polar with Vernier adjustment. Price ..... £1/2/6

Crystals. Price, from ..... 1/- to 3/6

Crystal Detectors. Units assembled. Price ..... 7/6 and 11/-

Crystal Detectors. Unassembled. Price, each ..... 4/-

Dials. Price ..... 1/- to 5/6

The remainder of the price list (E to Z) will be published on this Page in next week's "Wireless Weekly."

# DAVID JONES'

RADIO DEPT., 252 YORK STREET, SYDNEY



# INSTRUMENTS USED IN RADIO SERVICE.

By H. A. Stowe, M.W.I.A.

*Paper read before the N.S.W. Division of the Wireless Institute of Australia on Tuesday, 15th July, 1924.*

**T**O operate a transmitting set without measuring instruments is like trying to steer a boat without a compass on a dark night. It is sure to lead to trouble sooner or later. They have a very important place in the circuit of a transmitter, or receiver for that matter.

There are so many different types of instruments offering that an experimenter who is not familiar with them may be put to some trouble wondering which instrument will suit his requirements.

The correct choice of instruments, then, is also important, and may affect, to a large extent in some cases, the efficiency of the set; in fact, rather than being an asset they may be a source of trouble.

It is the purpose of this paper to briefly describe the construction of the various types of instruments and their application.

In order to know what a set is doing it is necessary to know certain values, which values can only be determined by suitable instruments. We may then classify our requirements under three heads—

- A. Power input to set.
- B. Power output, or radiation.
- C. Current values in various parts of the circuit.

Each of these heads require its own special type of instrument, and their proper selection is important. The type of instrument for each section will be indicated, and later a detailed description of each will be given.

## Power Input:

The power input to a set is equal to the product of the plate voltage and the plate current.

These values must, then, be measured by some type of instrument. Both these values may be measured at the valve, and so use Direct Current values. So that instruments suitable for D.C. must be used. In this direction we have two choices—1, Moving Coil type; 2, Moving Iron type.

The first is a direct current instrument only, while the second is suitable for either direct or alternating current.

Of these two types the moving coil

is by far the most sensitive, and takes less energy from the circuit for its operation. Its scale is uniformly divided, thereby allowing greater accuracy in reading. The Moving Iron Instruments, while being universal in their application, are not nearly so sensitive, and take more energy to operate them. Their scales tend toward crowding at the ends, thereby making close reading difficult. Compared to the moving coil type they are cheaper in price. The power consumption of the instrument is important, for when the power to be measured is very small the power consumed in the instrument may represent a fair percentage of the total power being used.

As the actual plate current is usually very small, below 100 M/A, accuracy is necessary in reading this value. In this direction the moving coil instrument should be used, as up to the present no moving iron instrument has been constructed on commercial lines to read accurately as low as this. Such instruments reading as low or anywhere near as low as this have large losses; the reason for this will be explained later.

The moving coil instruments can be made to read as low as desired, even to a fraction of a M/A. They also have low losses, and are very accurate.

In the case of the plate voltage, it may either be measured on the A.C. side of the rectifier or on the D.C. side.

If measured on the A.C. side allowance must be made for the drop of volts in the rectifier, and in this case an A.C. instrument must be used. In this case a moving iron type of instrument can be used satisfactorily, as at voltages such as are used on transmitters such instruments can be constructed to read very accurately with very low loss—that is, when connected across the supply will take very little current. In this case it must be noted that such instruments take more current the lower the voltage for which they are designed.

If the plate voltage is measured at the D.C. side or at the valve, a moving coil instrument can be employed with advantage on account of their features as before mentioned—that is, accuracy

and low power consumption.

It should be noted in this direction that the current taken by the instrument can easily be much more than the current taken by the valve if a cheap class of instrument is used.

From this it will be seen that if any true indication of the input is desired, some consideration should be given to the instruments which are to be used to measure the values.

The same remarks as above stated apply almost in every case where values of the current in any part of the circuit is required, with the exception of the aerial current.

In the measurement of the valve filament current values, either the voltmeter method or the ammeter method may be used. The voltmeter method is generally the most satisfactory, for it shows the actual voltage being applied to the valves. The ammeter method has a point or two in its favor, as the actual current consumed by the valves is indicated, but where a large number of valves are in use, say, in a receiving circuit, allowance must be made for the current taken by individual valves. The ammeter can be used for determining the lowest current value at which the valves can be worked satisfactorily. In both these cases accuracy is required, and some notice should be taken of the instrument used. In the case of the voltmeter method the voltage used is generally fairly low. This means that relatively low resistance instruments must be used to measure it.

In the case of the moving iron type a fairly large current may be taken by the voltmeter if of medium or cheap quality, and even if of good quality the current is high compared to moving coil instruments of the same value, and as this instrument is to be permanently across the battery its current consumption is of some importance where accumulators have to be used. Somewhat the same thing applies in regard to the ammeters also. Ammeters of moving iron type of low reading have a relatively large drop across them owing to the employment of a relatively large operating coil, while the losses in a moving coil ammeter are very low, indeed.

(Continued on Page 38.)



# K. & C. NEW V. T. SOCKET



K. & C. has just introduced a new standard V. T. Socket that for attractiveness, adaptability and performance is in a class by itself. Like all of the new type products of K. & C., the new socket is built with a consideration of the needs of the radio set constructor, shortcomings of similar products in the past, durability and dependability. The K. & C. V. T. Socket has a moulded bakelite base and heavy nickelled shell. Contacts are heavier and more rigid than formerly, thus insuring the best contact with tube prongs.

All contacts are silver-plated, reducing resistance, and are placed at right angles to each other for minimum capacity. Terminals have octagonal binding post nuts, and also are equipped with lug for those who desire to solder connections. An added feature of the new V. T. Socket is its adaptability to panel mounting. Metal collars and screws are furnished with socket for panel mounting.

**PACIFIC ELECTRIC CO.,**  
**87 Clarence Street, Sydney**

TRADE

MARK



*For Better Reception of  
 The Broadcasting*

USE THESE



PRODUCTS

Valve Sockets, Trans-  
 formers, Coils, Plugs,  
 Coil Mountings,  
 Rheostats, Potenti-  
 ometers, Condensers  
 etc, etc-



IMPROVED  
 PHONE CONDENSER  
 500 mfd.



# BRINY REMINISCENCES.

By Brasso.

(Continued from Last Week.)

And what merry hours we spent there, with the "old man" sitting at the head reeling off his dry Scotch yarns. Old timers on the Australian coast may remember Captain Buchanan as the man who sneaked the damaged steamer "Papanui" out of Melbourne without a pilot and in the face of instructions to the contrary from the Navigation Dept. A cruiser was sent after him, but when she hove up alongside, the "Papanui" was gaily fluttering the "Nicaraguan" flag from the stern. The "old man" was never tired of telling us of that momentous voyage from Melbourne to Kobe, with a skeleton crew and two great holes in the bottom roughly chocked up with planks and cement.

We passed Malta close to the northward about three days out, and next morning had a little mild excitement when three French cruisers bailed us up and circled slowly round while they gave us the once over. The "Bakara" was so obviously German that she invited suspicious and close scrutiny. The sight of those guns levelled at us sent a chill feeling up and down my spine and I was more than pleased when we were officially passed, and proceeded on our way with the snow clad mountains of the North African coast a mile or so on the port beam.

Listening-in during my hours on watch the ether seemed filled with a very babel of sound, and the Mediterranean seemed full of warships of every nationality. I soon learned to distinguish the British ships by the booming crashing note; the Italian by the "Da" used instead of the usual "De"; between calls; and the French note which sounded almost similar to the old fixed gap discharger. The messages were of course in code, all of which I painstakingly logged and passed along to the "old man" who, I subsequently learned used to just as painstakingly pass them into the galley fire. All Merchant vessel traffic was, of course, stopped, except in the case of neutrals, who must have enjoyed the unrestricted freedom of the air. Being on the main sea lane we passed many steamers bound East, from deep laden colliers to the stately Bibby liners bound for India. Although several Q.R.A.'s were shot at me from Dutchmen and Swedes I nev-



Gibraltar.

er so much as warbled a solitary det back although I was often inclined to pull off some joke such as "Here S.S. "Edina" bound from Melbourne to Geelong.

In due course the grim heights of the Rock of Gibraltar rose out of the mist ahead, and sliding gently around the headland on which were the tall masts of B.Y.W. (Windmill Hill) we came to anchor in the middle of a bunch of assorted steamers. In a few moments a torpedo boat came alongside and a neatly clad R.N. Lieutenant bawled questions at us through a megaphone. Our stay in Gib was exactly 45 minutes, the whole of which I spent studying through a German telescope the terraced heights of Gibraltar, and the Spanish looking houses with their red roofs and green shuttered windows. From various points up the side of the Rock the wicked snouts of guns stared grimly at possible enemies, and sticking over the very edge of the summit were others that seemed perilously close to overbalancing and crashing down upon the narrow streets of the town of Gibraltar.

Across the Straits a dull grey patrol boat steamed ceaselessly up and down, and out from the dock entrance sped a fleet of mosquito craft, bent upon some mission or other. Being confronted with the Rock itself, and the vision of those big guns dominating the entrance to the most important waters in the world, the claptrap that

has been written about the passing over to Spain of Gibraltar paled into insignificance beside the fact that nothing visible could pass that barrier.

However my musings were abruptly terminated by the last fond words of the Naval Lieutenant, who blithely got the following off his chest: "You may bump submarines, but you can easily get away from them." So, all hands filled with a new sense of the joy of living we up anchor and steamed away along the Spanish Coast, bound for Blighty. As the dusk crept down, an ice cold wind blew up from the broad Atlantic, and astern the blinding beam of a searchlight on the heights followed our course for a few moments, and then swept away over the Straits, moving slowly up and down and covering every yard of water.

That night, between 7 and 8, I logged four S.O.S. calls from torpedoed vessels around the English coast. And listening in there in the silent cabin, the only sounds being the measured tread of the officer on watch on the bridge above and the steady thump of the screw, it seemed that I was in another world. The fun was over and ahead of us was the Bay of Biscay, and the possibility of being earmarked by a prowling "unterzee" boat.

(To be continued)

Tell your friends about  
"Wireless Weekly"



# "RAMSAY" RADIO SUPPLIES

You cannot buy better :: Everything for the Amateur

|  |      |   |                |
|--|------|---|----------------|
| Maple Base Boards . . . . .                        | 3/3  | Valve Sockets, Radiotron Type, . . . . .    | 4/-            |
| Maple Loose Couple Ends, Set of 4, . . . . .       | 2/6  | Dry Cell Valves, 1½ volt . . . . .          | 27/6           |
| Contact Stops, N.P., per doz. . . . .              | 1/-  | Jefferson Transformers, No. 41 . . . . .    | 30/-           |
| Contact Studs, N.P., per doz. . . . .              | 1/-  | Jefferson Transformers, Star . . . . .      | 25/-           |
| Runner Rods . . . . .                              | 10d. | Murdoch 3,000 Head Phones . . . . .         | 30/-           |
| Sliding Contacts, brass . . . . .                  | 1/6  | Murdoch, 2000 Head Phones . . . . .         | 25/-           |
| Sliding Contacts, N.P., . . . . .                  | 2/3  | Winding Wires, all sizes in stock.          |                |
| Crystal Detectors, Mounted . . . . .               | 3/3  | Aerial Wire, 3/20 . . . . .                 | 2/9 per 100ft. |
| Crystal Detectors, N.P., unassembled . . . . .     | 3/-  | 43 Variable Condensers . . . . .            | 18/6           |
| Crystal Detectors, glass enclosed, mounted, 5/6    |      | Primary Tubes Wound . . . . .               | 3/6            |
| Crystal Detectors, glass enclosed, unmounted, 4/2. |      | Secondary Tubes, Wound and Tapped . . . . . | 6/-            |
| SPDT Knife Switches on Porcelain Base, 2/9         |      | Crystal Receivers, Panel Mounted . . . . .  | £2/5/-         |
| DPDT Knife Switches, on Porcelain Base, 4/6        |      | Single Valve . . . . .                      | £7             |
| Valve Sockets, R Type . . . . .                    | 2/6  |   |                |

Write for Catalogue, W 16.

**RAMSAY SHARP & COMPANY, LIMITED**  
 RADIO ENGINEERS 217 GEORGE STREET, SYDNEY.

OUR SPECIAL  
 LINE  
**PEERLESS**  
 Head Phones

2000 Ohms.

**32/6**



"REFLEX" Loose Coupler Receiver  
 £3-15-0

Complete Set of Parts to make the above Set 36/6

Postage 1/6

**RADIO HOUSE**  
 619 George Street, Sydney





(Continued from Page 34.)

#### Aerial Currents.

Somewhat different conditions exist here compared to the other parts of the circuit. The frequency of the current in this part is infinitely higher than the rest of the circuit where instruments are used, thus preventing the use of ordinary type instruments, either moving coil or moving iron, so that a different type has to be employed and may be mentioned under two heads, "hot wire" and "thermo-couple" instruments. The cost of these instruments differ very considerably: thus the experimenter, if of the usual type, "poor," may lean towards the cheaper, the "hot wire" instrument, while the man that possesses a thermo ammeter is thought very fortunate.

It is intended to describe the construction of these two instruments, along with their suitability for the work. Those who are "transmitters" know how important it is to keep the aerial system resistance as low as possible, as the current flowing or radiation is directly dependent on that factor. In most aerials the D.C. resistance of the aerial is from about 1 to 3 ohms, and in some cases may be lower than 1 ohm, and as any increase in this value may considerably reduce the radiation current, we should consider carefully what we intend to connect in series with it to measure the current flowing. Let us take the first-mentioned instrument, the "hot wire" type. Its construction is as follows:—A piece of fine wire which carries the current to be measured is fixed at each end to a rigid support. From the centre of this wire a thread is taken round a very fine spindle, which is carried in jewels, and to which the pointer is attached. Fixed to the spindle also is a coiled hair-spring, which tends to turn the pointer from zero towards the other end of the scale against the restraining action of the thread, which is wound round the spindle so as to oppose the spring. When the current to be measured passes through the wire, which may consist usually of platinum-iridium or platinoid, or any metal of high melting point, the heat generated therein causes the wire to expand, so allowing the thread to slack out, thus permitting the spring to turn the spindle through an amount equal to the amount of the expansion of the wire, and as the amount of expansion is proportional to the temperature of the wire, which in turn is proportional to the current flowing, it follows that the movement of the pointer is a measure of the current flowing, such move-

ment being actually proportional to the square of the current flowing in the wire. In order to get sufficient movement of the pointer to be of use, the "hot wire" has to be made fairly long, between 2 and 4 inches, depending on the construction of the instrument. Further, in order that the best factor may be effective for the relatively small current used in the aerial, the wire has to be of very small cross section, and the finer the wire the higher its resistance. Now, as any alloy has a higher specific resistance than copper, it is found that the resistance of the hot wires are comparatively high. The smaller the current to be measured the higher will be its resistance, which for meters generally used on experimental low power stations is between 2 and 4 ohms. It will be seen, then, at once that the resistance of the ammeters may be twice that of the aerial, or more, thereby cutting down the radiation, as the hot wire is usually connected directly in series with the aerial. This feature or fault decreases with the size of the instrument, as with larger capacity meter several hot wires or shunts are used, thereby decreasing the resistance of the meter.

A somewhat different principal is employed in the thermo instruments. When two different metals are brought together at one point and that junction heated, a small direct current is set up in the metals, and it is found that there are certain metals when used together give a larger current when heated—for instance, iron and constantan. The current flowing in the metals is proportional to the temperature of the hot junction. If, then, a sensitive direct current instrument such as a moving coil instrument is connected across the cold ends of the metals, the instrument can be made to indicate the temperature of the metals. If then we use, say, a small piece of wire carrying a current to heat the thermo junction, the moving coil instrument will in reality measure the current flowing in the heating wire. This, then, is the principle of the thermo instrument. The hot junction of the thermo couple is welded to a very short piece of wire, which is to carry the current to be measured. This heating wire being very short has a very low resistance, and as the thermo couple is welded to it the instrument responds to very small changes of temperature, hence to changes of current flowing. These instruments are very accurate and not affected by the temperature of the surrounding air, as is the case with the hot wire instru-

ments.

It is evident from this which is the most efficient type of instrument for accurate work. Both these types of instrument are unaffected by change of frequency, and respond with equal accuracy on either high or low frequency.

Continued in next issue.

#### A LONELY WIRELESS POST.

Willis Island, which is about half-way between Brisbane and the region of Papua and the Solomon Islands, has been equipped by the Australian Government with a wireless station and meteorological lookout post.

Situated in the centre of a hurricane area, Willis Island is merely a strip of rough grass land 468 yards long, fringed with a coral beach. Coral mixed with cement served to make the mortar in which the two 87-foot tubular masts are set, and for the foundations of the wireless hut and living quarters.

Two operators are in charge, and in spite of their apparent isolation, are in wireless touch with the Australian station at Rabaul, in New Guinea.

During the hurricane season the station reports its observations to the mainland every three hours, and the new service should prove of immense service to shipping in this treacherous region.

The station is operated by the Coastal Radio Division of Amalgamated Wireless (A/sia) Ltd.


## Wireless Apparatus

New or Second-hand,  
Bought, Sold or Exchanged

**HOWELL'S**  
19 Barlow Street  
SYDNEY

PHONE : M A 1133  
OPEN TILL 9.30 FRIDAY NIGHT





Price, 12/6.

## Dont Choke Your Set

C.R.L. Potentiometers have a Graphite resistor, no wire. The resistor is completely enclosed and non-inductive. There is no choking or retarding of radio-frequency current, no racket when you move the knob.



The C.R.L. Adjustable Grid Leak, another C.R.L. product, provides smooth adjustment through complete range, 0-6 megohms.

Double your Range by using C.R.L. Products

OBTAINABLE FROM

Price, 10/-, with Condenser.

# THE UNIVERSAL ELECTRIC COMPANY

108 MARKET ST.

"Where your money goes the furthest."

M 3411

A brand new single valve set for sale, with all accessories, at half price. Write to G. Holland, 9 Pile St., Dulwich Hill, for full particulars.

## THE N.S.W. BOOKSTALL FOR Books on Wireless

*The Armstrong Super-Regenerative Circuit.*

Every experimenter should make himself familiar with Feed Back, Armstrong's invention. The wonderful achievements of Major Armstrong in wireless research is demonstrated in the book under notice. Published in America at 1-dollar. We are enabled to sell it by special arrangement at half price, 2/8 posted. Every wireless enthusiast should have one.

N.S.W. Bookstall Co. Ltd  
476 George Street, City.

## Announcement to Readers

MR. T. FORD, Surgeon Dentist, specialises in the maintenance and care of teeth. Malformations and irregularities painlessly adjusted. Scientific treatment with latest appliances. Remember your future health is dependent upon the early care and attention given to your teeth. Teeth capped and filled; artificial teeth repaired.

'Phone Padd. 179 — Making an Appointment

Hours: 9 a.m. to 9 p.m., Mondays to Fridays  
9 a.m. to 1 p.m. Saturdays

## T. FORD, Surgeon Dentist

(Established 20 years)  
263 Crown Street, Sydney.



## WIRELESS BROADCASTING

has bridged the miles between City and Country

BUT IT IS NECESSARY TO HAVE AN EFFICIENT RECEIVER TO  
TO COLLECT THE BROADCAST MATTER AND TO REPRODUCE IT  
WITHOUT DISTORION *That Instrument is . . .*

**'BURGINPHONE'** *and it is Australian-made*

To the health and independence of farm or country life, a "BURGINPHONE" adds the large city's most envied advantage—access to wholesome, inspiring entertainment. A "Burginphone," the reproducer supreme, brings out all that is finest and best in broadcast programmes—clearness, fidelity to the original, and above all, sufficient power to be enjoyed by the entire family and their guests.

Illustrated Catalogue and Price List on Application.

*"Service and Quality"*

*"Service and Quality"*

**BURGIN ELECTRIC CO.**

MANUFACTURERS AND SUPPLIERS OF HIGH-GRADE WIRELESS APPARATUS  
st FLOOR, CALLAGHAN HOUSE, 391 GEORGE STREET, SYDNEY  
OPPOSITE HORDERN BROTHERS GEO. ST.

Tel. M 3069

Telegrams,  
"Burgineco, Sydney"

## GRODAN SPIDER WEB FORMERS

ONE OF THE BEST  
TUNING UNITS ON  
THE MARKET



CAN BE USED IN  
VALVE OR CRYSTAL SET.


All the principal Radio Stores at Ninepence (9d.) each.  
Ask for Grodan Brand Variocouplers and Cardboard Tubes.

ALL DEALERS — GROSE & DANIELL, SYDNEY



# Careful Selection of Parts Insures Satisfaction

See these New Units at  
Gilfillan Dealers

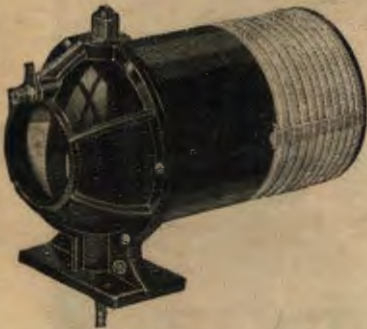

**RADIO FREQUENCY VARIO-  
COUPLER.**

One of the latest developments in radio construction. The Gilfillan Radio Frequency Variocoupler, as illustrated above, is ideal for REFLEX CIRCUITS, giving absolute selectivity through perfect zero coupling. Wide coupling, sharp tuning and extreme selectivity are made possible by this unit. Highly recommended for radio frequency work. Local broadcasting easily tuned out in favor of more distant stations.



**DETECTOR-AMPLIFIER UNIT.**

Admirably adaptable to radio frequency circuits or audio frequency work. Simplicity of wiring and exceptionally short leads. Jacks can be mounted directly to bottom, and transformers on platforms provided. Filament rheostats, tube sockets, binding posts and solder lugs complete in this unit.

**O**F COURSE the set you build is to be better than any owned by friends---and it can be. Avoid their mistakes, profit by experience, and build a set to be proud of. The difference in cost between a makeshift assembly and a good one is nominal---but the difference in reception results obtained is tremendous. For best results—

## *Gilfillan Radio Parts*

*(Units of Recognized Quality)*

offer the most at least cost. Ask your dealer for these *better* parts. If your dealer does not handle *Gilfillan* write us for name of nearest dealer, descriptive folder and list.

# *Harringtons*

386 George St.,  
Sydney

### **OTHER GILFILLAN PARTS.**

|                          |                          |                        |
|--------------------------|--------------------------|------------------------|
| Variocouplers (2 sizes)  | Primary Inductance       | Detector Units         |
| Variometers (2 sizes)    | Switches                 | Vernier Air Condensers |
| Air Condensers (3 sizes) | Panel Switches           | Filament Rheostats     |
| Potentiometers           | Tube Sockets             | Vernier Rheostats      |
| Audio Frequency Trans-   | Tube Socket Adapters     | Moulded Knobs, etc.    |
| formers                  | Detector Amplifier Units |                        |





# Radio Company

Limited

15 LOFTUS STREET

Circular Quay

SYDNEY



NORTH SHORE

MANLY

MOSMAN


LANE COVE

PARRAMATTA


WATSONS BAY

Ferry travellers pass our doors. To accommodate our customers, we will in future open at 8.30 a.m. to receive orders for Bakelite to be cut and drilled, Wire, Slider Bars, Tubes wound, etc.

These orders will be ready for delivery at 5 p.m. same day



We are also open Friday Nights until 9 o'clock



# RADIO CO., LIMITED

15 LOFTUS STREET, CIRCULAR QUAY, SYDNEY



## Personalities in the Australian Wireless World



MR. J. G. REED,

*Radio Engineer, Amalgamated Wireless (A/sia) Ltd.*

**A**BOUT 1910 an experimenter gave a wireless demonstration at the Newcastle School of Arts, the apparatus consisting of a large spark coil connected to two long brass rods for a transmitter, while across the room was a similar system connected to a coherer and bell for the receiver. The operation of this apparatus made a vivid impression upon the audience, one of whom was no other than Mr. Reed, who thereupon decided that wireless had more than a passing interest for him—and he commenced a new hobby.

A year later, with the aid of a one-inch spark coil and single circuit crystal receiver, the subject of our sketch succeeded in working over a distance of  $1\frac{1}{2}$  miles.

In 1914 Mr. Reed was carrying out radio experiments in conjunction with Lieut. Bracegirdle, SDNO, and the Signal Staff of the Newcastle Naval Depot, and in 1915 he joined the Naval Shipping Examination Service, later

taking up duties as telegraphist and electrical artificer at Sydney Radio and Garden Island, finishing up in 1918 as assistant to Radio Inspectors Weston and Crawford. Subsequently he was for some time engaged as Engineer in the Telephone and Telegraph Department of the Sydney G.P.O.

In Melbourne, in 1922, Mr. Reed carried out the first long distance amateur experiments with Mr. Chas. MacLurcan at Sydney. Using only two valves, signals were picked up in the southern capital from the old 1350 metre 9 watt station at Strathfield.

Many experimenters are, no doubt, familiar with Mr. Reed's voice as announcer at 2 M.B., from which station he used to broadcast weekly gramophone concerts.

Mr. Reed joined the Commonwealth Government Radio Staff in 1921, from which service he was transferred to Amalgamated Wireless (A/sia) Ltd. in 1923. In collaboration with the Company's engineers he has done ex-

cellent work in connection with the equipping of Farmers' Broadcasting Station "2.F.C.," being responsible for most of the detailed work in connection with the design of the apparatus.

Mr. Reed has lately been engaged in the conversion of the spark transmitter at Sydney Radio into a modern high-power tonic train valve transmitter, and more recently engaged on testing work in connection with the new Melbourne Broadcasting Station.

Mr. Reed has a distinct liking for ferreting out cause and effect—the essence of research work—and brings to bear upon his work an extensive wireless knowledge acquired partly by practice and partly by studying the latest literature dealing with developments in every phase of wireless.

It may be said that Mr. Reed's main hobby, apart from his work, consists of wireless experimenting, lecturing to amateurs, and writing radio articles on how to construct wireless sets from the most miscellaneous gear.

### NORTHERN SUBURBS RADIO SOCIETY.

*Continued from page 32*

The last general meeting of this society was held at the clubroom, Gordon Public School, Gordon, at 8 p.m. on Tuesday, 22nd.

It was decided that the club should give a demonstration of wireless receiving to the students of the Gordon Public School on Saturday, August 9, and the secretary very kindly offered his set for use on this occasion.

A lecture on aërials and earths was delivered by Mr. Primmer, and proved very interesting to those present.

The club's new aerial which had just been erected was also tested out on a two-valve set loaned for the evening by one of the members, and during the evening some very good signals were received on it.

A further discussion then took place on the club's four-valve set which is in course of construction. This set is to consist of a step of radio frequency detector, and two steps of audio frequency; and members are asked to bring along any parts which they are willing to donate towards the completion of this set.

The next meeting will take place on Tuesday, August 5, at 8 p.m. Anybody interested in wireless will be very welcome, and a lecture is to be delivered on "Tuning Apparatus." Further particulars may be obtained from the hon. secretary, Mr. R. Primmer, Gordon Road, Gordon.



# Q. X. Valve

Before you  
Expend  
Money on  
Radio  
Equipment  
Consult  
Anthony  
Horderns'  
Wireless  
Experts.

Your inspection of the big display of everything that is new in the world of Wireless, is invited.


(Wireless -- Second Floor)

Anthony Hordern & Sons  
Limited,

Brickfield Hill, Sydney

Phone City 9440.

Box 2712 G.P.O.

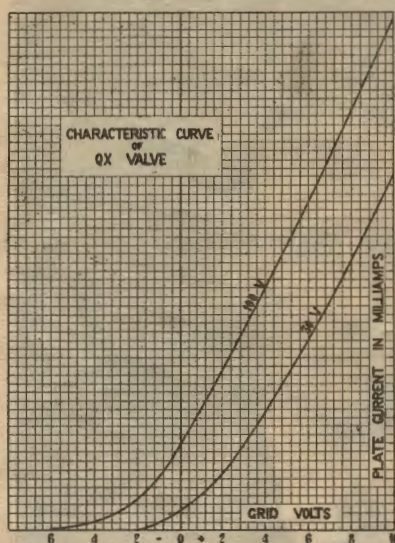

The Marconi QX Valve is of the tubular type. This is a highly efficient modern valve, and is the result of much research and experience in valve manufacture.

The plate and grid leads are brought directly out through the sides of the glass tube, thus ensuring that the capacity effects in the valve are at a minimum.

The QX is a particularly sensitive detector, and is equally effective when used as an amplifier.

Reference to the characteristic curve will show that the QX may be used to give unusually good rectification, and that with suitable potentials applied high amplification may be availed of.

| Type | Fil. Bat. | Fil. Term. | Filament | Holder clips | Type V24.      |
|------|-----------|------------|----------|--------------|----------------|
| QX   | Voltage 6 | Volts      | Amps     | Anode        | Approx. Dia.   |
|      |           | 5          | 0.75     | Volts        | of Bulb        |
|      |           |            |          | 25-100       | 18 m.m.        |
|      |           |            |          |              | Approx. Length |
|      |           |            |          |              | 73 m.m.        |

Continued from page 15.

Every night since some of these experimenters have come in well, and most of them are audible up to a foot from the phones. KGO is heard every night; he broadcasts, and his carrier is QSA on 2 valves, no audio being employed. The distance to Sydney by air from here is 800 miles. 2BL and 2FC can be heard every night on 1 valve, and 2BL has been heard very faintly in daylight on the same number. I soon hope to have a five-watt transmitter going, and to work with some of the above stations.

With best wishes for the advancement of your great little paper.—Yours faithfully,

H. L. HOBLER,

Experimental Station 4DO.

[And very nice going, too.—Ed.]


## STERLING HEADPHONES

We regret that through an error in our last issue, "Sterling" Lightweight Headphones were listed at £4/4/-, instead of 44/-, in advt. of The Lawrence and Hanson Electrical Co., Ltd.

This make of headphone is becoming increasingly popular with wireless fans, and judging by remarks, few would begrudge paying £4/4/- for them. Still, the correct list price is 44/-.

Published by A. W. Watt, "Keira," Alfred St., North Sydney, for the proprietors and printers, Publicity Press Ltd., 33/37 Regent St., Sydney.



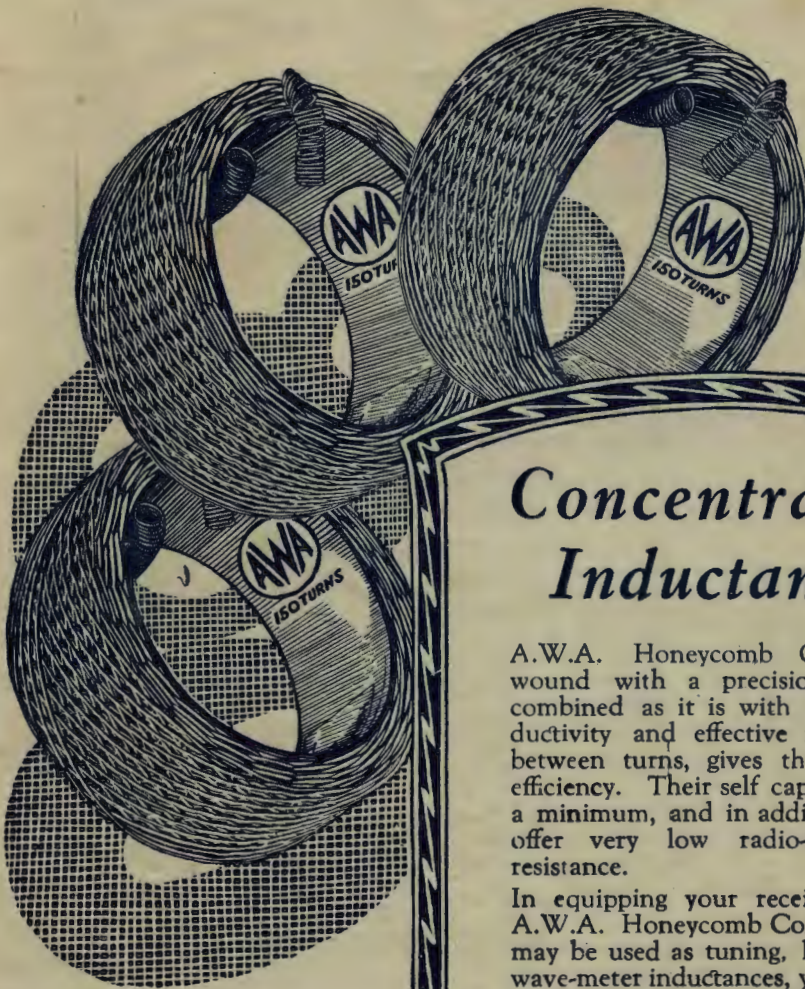

## Concentrated Inductance

A.W.A. Honeycomb Coils are wound with a precision which, combined as it is with high conductivity and effective insulation between turns, gives the utmost efficiency. Their self capacity is at a minimum, and in addition, they offer very low radio-frequency resistance.

In equipping your receiver with A.W.A. Honeycomb Coils, which may be used as tuning, loading or wave-meter inductances, you secure maximum all-round efficiency. Each Coil is attractively boxed, a wave-length table being printed on every carton.

*Procurable from all Radio Dealers*

Amalgamated  Wireless  
*(Australasia) Ltd.*

97 Clarence Street, Sydney  
'Collins House,' Collins St., Melbourne



**PRODUCTS**



# “STERLING”

(BRITISH MAKE)



# AUDIVOX

*ALL PURPOSE*

## LOUD SPEAKER

1. In Radio there is no greater goodwill than that possessed by “STERLING” Loud Speakers. Quality created it and quality will keep it.
2. The “AUDIVOX” is faithful to an echo in reproduction—clear, melodious and perfect in tone—ample in volume, with never a sign of distortion. A true “STERLING” production.
3. It is the all-purpose Loud Speaker—equally suitable for home and public use; indoors or outdoors.

AUDIVOX is supplied in the following finishes:—

|                          |        |
|--------------------------|--------|
| Black Enamel . . . . .   | £9 0 0 |
| Brown, Floral . . . . .  | 9 10 0 |
| Black and Gold . . . . . | 9 15 0 |

STERLING LIGHTWEIGHT HEADPHONES, 4000 ohms . . . . . **44s.**  
 “STERLING” Radio Goods, obtainable from all Radio Dealers.  
 Large Stocks — Immediate Delivery

STERLING TELEPHONE & ELECTRIC CO. LTD., LONDON  
 Sole Agents for N.S.W. and Queensland :

## The LAWRENCE & HANSON ELECTRICAL Co. Ltd

33 York Street, Wynyard Square, Sydney.

and Charlotte St., Brisbane

Telephone City 6016 (3 Lines)