

RECEIVED  
FEB 21 1988  
SBC

# ALLIED

Broadcast Equipment



---

**1988 CATALOG**

# ALLIED CORPORATE HEADQUARTERS



3712 National Road West • Richmond, IN 47374

Dear Broadcast Professional,

You can count on two things in the broadcast industry: growth and change. And here at Allied, we continue to grow and change along with the industry. Broadcasting today is not the same as it was five or even three years ago, and neither is Allied. Allied's responsiveness to the changing needs of the industry is one of the cornerstones of our success.

At Allied, all our changes are for you, the customer. Our expanded sales/marketing relationship with Harris has been structured to give you better and more convenient access to their fine equipment. Furthermore, in recent months we've inaugurated two important services to the industry, and re-instituted a third.

Our After-Hours Emergency Service is now in operation to speed critical components to you when you need them most. Our new Allied Systems Division brings together all the resources necessary to design and build an entire station, or update any part of your facility. And, by popular request, we've also brought back an old friend—the Allied Used Equipment Exchange.

Whatever the future holds for the broadcast industry, Allied will continue to grow and change right along with it. But one thing that will never change is our way of doing business, with honesty, friendliness and a personal touch. You and your fellow broadcasters are not only our customers, but our valued friends as well. Your calls and comments are always welcome. Let us hear from you soon.

A handwritten signature in black ink, appearing to read "Roy M. Ridge".

ROY M. RIDGE  
President  
Allied Corporation

A handwritten signature in black ink, appearing to read "Tom Harle".

TOM M. HARLE  
National Sales Manager  
Allied Broadcast Equipment

#### RESERVATION OF RIGHTS

No copying or reproduction of the format of this catalog or any of the designs, layouts, copy or pictures is permissible without the express written consent of Allied Broadcast Equipment. Copyright form SE has been submitted, and any and all acts of copyright infringement shall be legally pursued by Allied Broadcast Equipment toward complete recovery and relief.

©1987 ALLIED BROADCAST EQUIPMENT

**ALLIED**  
Broadcast Equipment

Allied wishes to acknowledge and thank Arrakis Systems, Fairchild Data Corp., Circuit Research Labs and Autogram Corp. for the use of printed circuit boards utilized for background in the cover photo. Color posters of the "Radio City" cover (size 20x17) are free for the asking! Please send your name and address on station letterhead to: Allied Corp., P.O. Box 1487, Richmond, IN 47375 - Attn: Radio City.



# — TABLE of CONTENTS —

| <b>NOMENCLATURE</b> (ALPHABETICAL SEQUENCE) | <b>PAGE</b> |
|---|-------------|
| AMPLIFIERS .....                            | 1-3         |
| AUTOMATION .....                            | 17-19       |
| BROADCAST SYSTEMS DIVISION .....            | 20          |
| CART ACCESSORIES .....                      | 28-29       |
| CARTRIDGE MACHINES .....                    | 21-27       |
| CD PLAYERS .....                            | 128-129     |
| CLOCKS & TIMERS .....                       | 30-31       |
| CONSOLES .....                              | 32-40       |
| DELAY LINES .....                           | 15          |
| DISTRIBUTION AMPS .....                     | 43-45       |
| EQUALIZATION .....                          | 13-14       |
| FURNISHINGS .....                           | 47-65       |
| HEADSETS .....                              | 66-67       |
| INTERCOMS .....                             | 67-68       |
| INTERFACES .....                            | 16          |
| MICROPHONES .....                           | 69-73       |
| MISCELLANEOUS .....                         | 130-137     |
| MONITORS .....                              | 73-80       |
| NOISE REDUCTION .....                       | 12          |
| PORTABLE MIXERS .....                       | 41-43       |
| PROCESSORS .....                            | 3-12        |
| PROGRAMMABLE CD PLAYER .....                | 90          |
| RECORDERS .....                             | 81-86       |
| REMOTE CONTROL .....                        | 86-89       |
| ROUTING SWITCHERS .....                     | 45-46       |
| RPU .....                                   | 91-92       |
| SATELLITE .....                             | 93-94       |
| SCA .....                                   | 95          |
| SPEAKERS .....                              | 95-98       |
| STANDBY POWER .....                         | 98-99       |
| STL .....                                   | 100-102     |
| TAPE CARTRIDGES .....                       | 27          |
| TELEPHONE .....                             | 103-109     |
| TEST EQUIPMENT .....                        | 110-112     |
| TRANSMISSION LINES .....                    | 113-114     |
| TRANSMITTING EQUIPMENT .....                | 115-120     |
| TUNERS .....                                | 121         |
| TURNTABLES .....                            | 122-128     |
| WEATHER EQUIPMENT .....                     | 129         |

| <b>NOMENCLATURE</b> (PAGE SEQUENCE) | <b>PAGE</b> |
|-------------------------------------|-------------|
| AMPLIFIERS .....                    | 1-3         |
| PROCESSORS .....                    | 3-12        |
| NOISE REDUCTION .....               | 12          |
| EQUALIZATION .....                  | 13-14       |
| DELAY LINES .....                   | 15          |
| INTERFACES .....                    | 16          |
| AUTOMATION .....                    | 16-19       |
| BROADCAST SYSTEMS DIVISION .....    | 20          |
| CARTRIDGE MACHINES .....            | 21-26       |
| TAPE CARTRIDGES .....               | 27          |
| CART ACCESSORIES .....              | 28-29       |
| CLOCKS & TIMERS .....               | 30-31       |
| CONSOLES .....                      | 32-40       |
| PORTABLE MIXERS .....               | 41-43       |
| DISTRIBUTION AMPS .....             | 43-45       |
| ROUTING SWITCHERS .....             | 45-46       |
| FURNISHINGS .....                   | 47-65       |
| HEADSETS .....                      | 66-67       |
| INTERCOMS .....                     | 67-68       |
| MICROPHONES .....                   | 69-73       |
| MONITORS .....                      | 73-80       |
| RECORDERS .....                     | 81-86       |
| REMOTE CONTROL .....                | 86-89       |
| PROGRAMMABLE CD PLAYING .....       | 90          |
| RPU .....                           | 91-92       |
| SATELLITE .....                     | 93-94       |
| SCA .....                           | 95          |
| SPEAKERS .....                      | 95-98       |
| STANDBY POWER .....                 | 98-99       |
| STL .....                           | 100-102     |
| TELEPHONE .....                     | 103-109     |
| TEST EQUIPMENT .....                | 110-112     |
| TRANSMISSION LINES .....            | 113-114     |
| TRANSMITTING EQUIPMENT .....        | 115-120     |
| TUNERS .....                        | 121         |
| TURNTABLES .....                    | 122-128     |
| CD PLAYERS .....                    | 128-129     |
| WEATHER EQUIPMENT .....             | 129         |
| MISCELLANEOUS .....                 | 130-137     |

# The Growing Family of **ALLIED**



ATLANTA SALES OFFICE




CHICAGO SALES OFFICE



DALLAS SALES OFFICE



LOS ANGELES SALES OFFICE

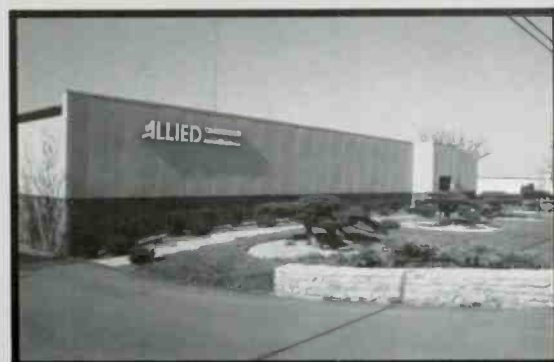

RICHMOND SALES OFFICE



SEATTLE SALES OFFICE

*Welcomes . . .*

**ALLIED**   
Broadcast Systems

**ALLIED**   
EQUIPMENT EXCHANGE



**BGW**

The **BGW 85** is a rack-mounted power amplifier rated at 35 watts per channel at 8 ohms, with 0.1% T.H.D. 20 Hz to 20 kHz, 90 watts into 8 ohms mono, with 0.15% T.H.D. (The Model 85 features modular circuit assembly, toroidal main transformer, packaged & cased transistors.)

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$519.00**

**ALLIED PRICE \$** \_\_\_\_\_



The **BGW 150** is a rack mounted power amplifier rated at 50 watts per channel into 8 ohms, 150 watts into 8 ohms mono, with intermodulation distortion of less than .02%, a frequency response of -.25 dB 20 Hz to 20 kHz and is designed for any load impedance equal to or greater than 4 ohms.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$799.00**


**ALLIED PRICE \$** \_\_\_\_\_



The **BGW 250E** offers a level of performance and reliability that has established it as the most advanced dual-channel, solid-state power amplifier available to the audio professional. In tests, performed by the US Army Air Force Exchange, of comparably rated power amplifiers, the BGW 250E received the highest score of all amplifiers tested. 100 watts minimum sine wave continuous average power output per channel.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1099.00**

**ALLIED PRICE \$** \_\_\_\_\_

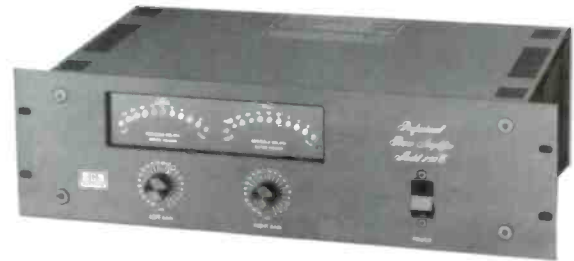

In 1985, after 13 years of continuous progress in the development of professional audio power amplifiers, BGW Systems now has the third generation Model **750E**. Although the front panel appearance, with its heavy diecast handles and model designation are similar, almost every other aspect of the 750 has been redesigned and improved. 250 watts per channel.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1699.00**

**ALLIED PRICE \$** \_\_\_\_\_



**CROWN**

The **CROWN D-75** offers significant benefits to the professional user, benefits like IOC input/output comparator that reports all forms of signal overload, lockable level control shafts, active-balanced XLR connectors as well as unbalanced 1/4" phone plugs and signal presence indicators that notify the user whenever the D-75 output signal is greater than 1/8 watt. 35 watts per channel.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$524.00**

**ALLIED PRICE \$** \_\_\_\_\_



Retaining the D-150A tradition for sonic accuracy and reliability, the **CROWN D 150A-2** Series II is rated at 80 watts per channel into 8 ohms, 250 watts into 8 ohms mono. The frequency response is  $\pm 0.1$  dB DC to 20 kHz at one watt into 8 ohms;  $\pm 1$  dB DC to 100 kHz., less than .001% harmonic distortion, less than .01 I.M. distortion and 6 volts per microsecond slew rate.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$749.00**

**ALLIED PRICE \$** \_\_\_\_\_





## CROWN

Since its introduction, the **DC-300A-2** and its modifications have been a standard of sonic accuracy, power and reliability. The 300A is FTC rated at 250 watts per channel into 8 ohms; 500 watts into 8 ohms mono.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1049.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## UREI

The **UREI 6500** features two channels on an independent, modular plug-in chassis with front panel access. The 6500 is rated at 275 watts into 8 ohms per channel output with .1% THD.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2996.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**UREI 6505** spare power module for the 6500.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$996.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## MARTI

The **MARTI MA 25-25** is a high quality dual channel audio power amplifier designed to meet the needs of the broadcast industry. Thermal, RFI, overload and output short circuit protection insure years of reliable operation. 25 watts per channel.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$330.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## ATI

The **ATI M-1000** dual microphone and **L-1000** dual line series of Micro Amps are rackable, micro-sized, stackable, versatile and RF protected. The series provide +22 dBm at clipping for transformer and single ended outputs, +26 dBm for balanced differential outputs. They're quiet; total amplifier noise is typically within 1 dB of the thermal noise of source impedance. A 13 microsecond slew rate minimizes the irritating harshness of TIM distortion. Typical circuit harmonic distortion held below .005% even at 20 kHz.

**L1000-1 dual transformer outputs..... \$345.00**

**L1000-2 balanced differential outputs..... \$345.00**

**M1000-1 dual transformer outputs..... \$365.00**

**M1000-2 balanced differential outputs..... \$365.00**

**ALLIED PRICES \$ \_\_\_\_\_**



**ATI PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR THE ALLIED PRICE.**



## NAD

The **NAD 3240PE** is a highly refined stereo amplifier of remarkable power. Its high-current output stage delivers full output to loud speakers of any impedance — high or low, simple or complex. Its unique power envelope circuit produces up to 200 watts per channel of clean, clear power for the dynamic tone-bursts in music — especially for the high-level peaks in digital compact discs.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$378.00**

**ALLIED PRICE \$ \_\_\_\_\_**




## SYMETRIX

The **SYMETRIX A-220** is a rack-mounted stereo amplifier rated at 20 watts per channel into 8 ohms, 40 watts mono into 8 ohms with .08% maximum distortion.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$315.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## HAFLER

So rugged is the design that the **HAFLER P-500** rack mounted amplifier can deliver over 20 amperes into a short circuit (before the supply fuses open!) When switched to mono operation, the amplifier's rated output is 800 watts into 8 ohms, which is capable of driving a 70 volt line distribution system directly. In practice, well over 900 watts of mono power is available. 250 watts per channel into 8 ohms.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1095.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## — PROCESSORS —

### KINTEK

The **Kintek KT-903 Stereo Converter** is a three-part automatic system which provides continuous dynamic conversion of mono to stereo for the TV Broadcaster. The KT-903 offers the opportunity to convert all programming to stereo format immediately at minimal cost. The core of the KT-903 is a high density phase and amplitude modifier, which introduces continuous complementary psycho-acoustic cues into left and right channels. The second part of the KT-903 system is the auto-centering dialogue control. Auto-centering adds a dynamic dimension in which dialogue remains centered. This new Kintek technique makes dialogue centrally focused, while keeping crowd noise, music and effects in stereo. The third feature of the KT-903 is the mono-stereo sense switch. In the presence of stereo input the system automatically bypasses through a soft cross-fade electronic switch. Its primary purpose is elimination of operator errors under varying input program formats. Voice and stereo width limit controls are mounted on the system's front panel. The system can be installed at the transmitter site since it is totally automatic.



**ORBAN**



The **ORBAN 8100A/1 FM OPTIMOD®** offers wideband or multiband operation, more versatile setup controls that permit precise "tuning" for different formats, improved voice/music balances, an improved stereo generator with cleaner baseband, new overshoot compensation that permits full modulation at all frequencies, yet doesn't increase low frequency IM distortion, plus a dual-chassis option, built-in crosstalk test generator, rigorous RFI shielding and true VC gain control. FM's favorite processor!

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$4995.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **ORBAN 8100A/XT2 FM OPTIMOD®** increases loudness without audible side-effects, improves consistency from source-to-source, increases presence and intelligibility on auto and table radios and more. Works with any 8100A series OPTIMOD-FM.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$2075.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **9100B/1 & 9100B/2 ORBAN OPTIMOD®** were designed for the state-of-the-art AM broadcaster. If your station has an AM transmitter and audio chain which will come close to passing an FM proof, an STL good out to 15 kHz (for co-located facilities) and an antenna system capable of 11 kHz minimum bandwidth there is not a better AM processor made.

**9100B/1 mono.....\$4395.00 ALLIED PRICE \$ \_\_\_\_\_**

**9100B/2 stereo.....\$5995.00 ALLIED PRICE \$ \_\_\_\_\_**



The new, second-generation **ORBAN OPTIMOD® TV 8182A** incorporates the latest research technology with with in-built loudness controller, is TV's most popular stereo system.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$4995.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **ORBAN 424A** has a compression ratio control for when you want to maintain some real dynamic range, however you'll be astonished at the openness and apparent dynamic range available even at the infinite ratio and apparent loudness increase achieved without usual side-effects.

**422A single channel.....\$629.00 ALLIED PRICE \$ \_\_\_\_\_**

**424A dual channel.....\$989.00 ALLIED PRICE \$ \_\_\_\_\_**



The new **ORBAN 536A Dynamic Sibilance Controller** is an improved, two-channel version of the 526A, and is considered the industry-standard de-esser by professionals around the world.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$539.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **ORBAN 464A Co-Operator** is a friendly, automatic "assistant operator" that smoothly and unobtrusively rides gain and limits peaks.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1195.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**ALLIED**  
Broadcast Equipment

## TEXAR

The **TEXAR AUDIO PRISM** is a very high-performance multi-band audio processor designed for major market broadcast use and other applications where sophisticated program handling is required. It utilizes four intelligent digitally-controlled processor cards to achieve high apparent loudness while producing few processing artifacts. Use with your OPTIMOD® in pursuit of top ratings.

Audio Prism.....\$1995 per channel

ALLIED PRICE \$ \_\_\_\_\_



## APHEX

The **COMPELLOR™** is a revolutionary audio processor. It delivers intelligent compression, leveling, and peak limiting simultaneously! The control circuits are actually analog computers that constantly monitor the input, adapt and control a single VCA per channel for minimal signal path. This versatile, cost effective processor is at home in broadcast pre-processing, microphone control, audio production, and tape duplicating.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$1195.00

ALLIED PRICE \$ \_\_\_\_\_



The remarkable **APHEX AURAL EXCITER IIB** is a unique proprietary audio processing device that makes use of highly advanced psycho-acoustic principles to effectively restore and enhance audio presence, brightness and intelligibility. Designed specifically for on-air use, this unit provides AM stations with the clarity and brightness of FM.

MANUFACTURER'S SUGGESTED LIST PRICE..... \$2495.00

ALLIED PRICE \$ \_\_\_\_\_



The Model **700 STUDIO DOMINATOR** provides absolute peak ceiling and total transparency below processing threshold during processing. It also features increased loudness, no hole punching, freedom from spectral gain intermodulation, minimal loss of transient feel, and high density capability.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$1195.00

ALLIED PRICE \$ \_\_\_\_\_



## STUDIO TECHNOLOGIES

Unlike most outboard devices such as time delays, harmonizers and equalizers, the **AN-2** Stereo Simulator is fully mono compatible. This means recordings produced with the Stereo Simulator suffer no balance distortion when heard on mono radio. It is also a valuable resource for television broadcasters that offer stereo transmission using monaural material.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$650.00

ALLIED PRICE \$ \_\_\_\_\_



## MOSELEY

The **MOSELEY SCD-9** stereo demodulator transforms a composite stereo waveform into discrete left and right channels for AM stereo and FM broadcast. It includes de-emphasis circuitry, 15 kHz low pass filters and front panel and stereo indication, with a SPDT relay for external control. An easy way to take advantage of composite STLs for AM Stereo.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$1695.00

ALLIED PRICE \$ \_\_\_\_\_





## CRL

For 1988, **CRL AM & FM** audio processing systems have far more than just a new look. The latest advances in AM & FM broadcast processing technology have been incorporated into new products to make the ever popular CRL processing systems even more flexible and better.

The new **CRL AM** processing systems are MODULAR and are comprised of either two or three of the following basic signal processing concepts:

- Input AUDIO GAIN CONTROL
- Optional MULTIBAND COMPRESSION
- Final PEAK MODULATION LIMITING

When used together these units provide complete program audio control to maximize modulation while maintaining tonal clarity and integrity of the original source material.


The new **CRL FM** processing systems are MODULAR and are comprised of either two, three or four of the following basic signal processing concepts:

- Input AUDIO GAIN CONTROL
- Optional MULTIBAND COMPRESSION
- Digital STEREO GENERATION

When used together, these units provide complete program audio control to maximize stereophonic modulation while maintaining tonal clarity and integrity of original program sources.

**PRICES UPON APPLICATION**

## UREI

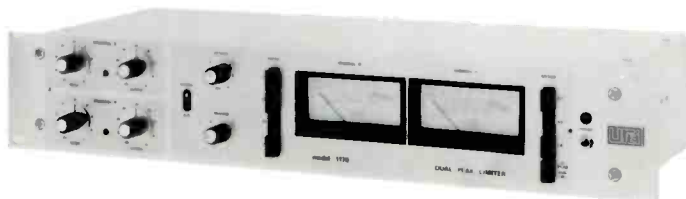

The **UREI 1176LN** single channel limiter features FET gain reduction ahead of the first stage. No tricky balancing required ever, there's no distortion adding active element in the gain reduction circuit, pushbutton selection of four different compression ratios and ultra fast attack time independent of peak duration or frequency and it's fully adjustable from the front panel.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$596.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **UREI 1178** dual peak limiter is a two channel version of the 1176LN. Limiting is accomplished by utilizing FET's as voltage variable resistors.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$896.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## VALLEY INTERNATIONAL



The **Model 610** dual compressor/expander offers the convenience of two high-quality compressors with flexibility of multi-function dynamics processing in an attractive rack package. Each of the two channels consists of a compressor section and an expander section both controlling the common channel VCA. A special release coupling circuit provides symmetrical release characteristics for both the compressor and expander making interactive processing possible, thus eliminating the problems associated with using separate dedicated-function units.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1250.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## DBX

The **DBX 160X** compressor/limiter provides the broadcaster with outstanding performance and operational flexibility in a slim-line rack mount package. The 160X has all the features of the famous 160 and more. It is the only compressor/limiter that offers you the choice of OVER EASY or hard-knee operation, regardless of the compression ratio selected.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$399.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **DBX 166** Compressor/Limiter/Noise Gate. The concept is total dynamics control — every needed processing function, every point in the signal path, from input to output. The combination of noise gate, OverEasy compressor, and PeakStop limiting provides for complete manipulation of the dynamics of the input. For recording, broadcasting, producing, and other sound installation, the 166 gives you what you have to have.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$575.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **DBX 163X** Compressor/Limiter/Preamp provides traditional dbx sonic quality and performance in a rugged, easy-to-use package at a very untraditional price. It's designed for the small-studio operator, disco DJ — anyone who needs a low-cost, friendly compressor/limiter/pre-amp.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$149.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **DBX 263X** is the simplest, easiest-to-use de-esser on the market. (It's also easy on the budget.) Modeled after the dbx 902 module, the 263X is designed for the announcer, DJ, small-studio recordist, and anyone else who needs a friendly signal processor that completely and effectively controls sibilance (excessive "ess" sounds).

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$149.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **DBX 463X** is the simplest, easiest-to-use noise-gate expander on the market. (It's also easy on the budget.) Modeled after our 904 modular noise gate, the 463X is designed for the recordist/mixer, ENG technician — indeed, for anyone who needs a friendly processor that gets rid of unwanted noise between notes or sounds.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$149.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **DBX 165A** is a result of combining the 165 and PEAKSTOP. The PEAKSTOP circuit which follows the compressor/limiter circuitry is a specially "soft clipper" that rounds the leading and trailing edges off the peak being clipped. By avoiding the normally sharp edges of a clipped peak, far fewer higher order harmonics are generated making PEAKSTOP less audible than other types of clippers.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$799.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**MODULATION SCIENCES**



The **CP-803** Composite Processor minimizes the distortion that conventional processors sometimes create. Conventional audio processors work with the left and right audio. But the CP-803 deals with the stereo composite signal that comes out of the stereo generator. By working on this signal instead of left and right audio, many audio problems are avoided. **RACK MOUNT INCLUDED.**

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$960.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **STEREOMAXX™** Spatial image enlarger gives your station an extra edge. Effective for all music formats . . . StereoMaxx doesn't change the sound of your music — it enhances and makes the most of it! A completely different effect from loudness processing; team it with any loudness processor you use.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$3195.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**ORBAN**



The ORBAN Model **245F** Stereo Synthesizer has been designed to take any mono signal and create lifelike pseudo-stereo. The patented Orban stereo synthesis technique causes no change in spectral balance, does not blur the transient definition, and adds not the slightest audible noise or distortion to the mono original.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$399.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The ORBAN Model **275A** automatic stereo synthesizer has stereo inputs and outputs designed to be placed permanently in the program line. It has two methods of automatic mono recognition. Automatic switching between true and synthesized stereo by smooth cross-fade that avoids clicks, pops, and abrupt sensations.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1895.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**TITUS**



**THE LAST WORD** senses when channels are out-of-phase, corrects the error, and signals a warning to the operator on duty. It also senses when a channel is missing and instantly switches both outputs to the channel with audio. It will also warn your operating staff when a "stereo" program is really a mono program. The microprocessor based LAST WORD makes the "intelligent" decision and inaudibly "cross fades" the right answer into the audio chain.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2975.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**VALLEY INTERNATIONAL**




The **VALLEY INTERNATIONAL 440** limiter/compressor/dynamic sibilance processor offers the convenience of a peak limiter, a high quality compressor/expander package and a dynamic sibilance processor section, each controlling a common voltage controlled amplifier.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$749.00**

**ALLIED PRICE \$ \_\_\_\_\_**




**VALLEY INTERNATIONAL**

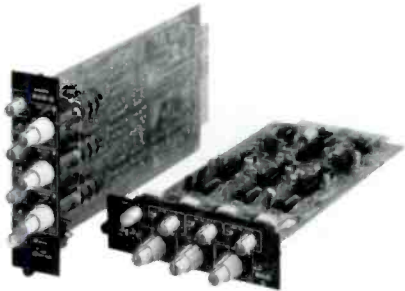

The **MAXI-Q** Fully Parametric 3-Band Equalizer employs an array of unique features to deliver maximum equalization capability. Each band features continuously variable frequency tuning over a very wide 7-octave range. Exclusive "tune" mode makes it easy to use and highly effective. For housing in 800 Series.

MFR'S SUGGESTED LIST PRICE.....\$420.00


ALLIED PRICE \$ \_\_\_\_\_

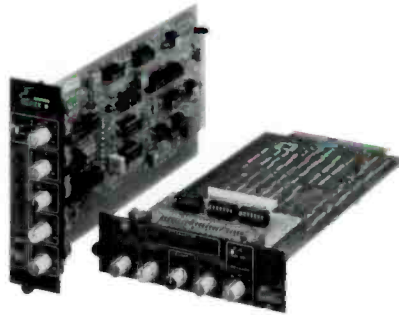

The **KEPEX II** Keyable Program Expander is a totally new design that ensures freedom from audio distortion, high noise levels and non-linear control/gain relationships. An excellent noise gate with 90dB of control range-digital-ready. Designed to be housed in either of the Valley 800 Series powered rack mounting enclosures.

MFR'S SUGGESTED LIST PRICE.....\$420.00

ALLIED PRICE \$ \_\_\_\_\_

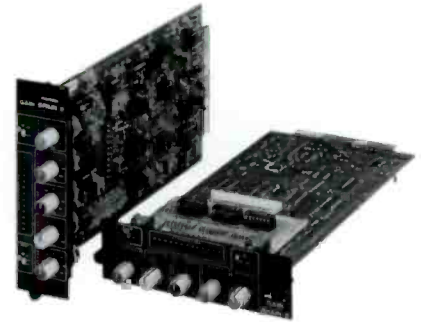

The **GAIN BRAIN II** is fundamentally different from any other limiter/compressor device. Its response is variable and dependant upon the degree of waveform complexity. This Variable Ratio Limiter *really* understands music and voice! It is highly useful in *all* applications requiring exacting control over audio levels. For housing in 800 Series.

MFR'S SUGGESTED LIST PRICE.....\$420.00

ALLIED PRICE \$ \_\_\_\_\_

Valley International's **PR-2/PR-10** Series 800 enclosures . . . the ideal way to add high-powered processing at a low price. The PR-2 is the industry's first two-position rack for modular audio signal processors. Its rugged steel construction allows rough use in mobile applications, but is at home in the equipment rack of broadcast or recording facilities. The PR-10 is built with cost-effectiveness in mind yet has a beefier power supply and is more road-worthy than any other rack system. The unit employs a unique two-section bipolar power supply.

**PR-2** .....\$250.00  
**PR-10**.....\$550.00

Finally, a mic processor that needs nothing else. The **Model 400** was designed specifically to enhance the on-air personality's performance. It features: mic level in . . Hi-or Lo-level out; extra Hi level send & return for further processing or effects; Eq. compress, gate, de-ess, PROCESS; and flexibility in interfacing your signal chain.


MANUFACTURER'S SUGGESTED LIST PRICE.....\$649.00

ALLIED PRICE \$ \_\_\_\_\_

The **DYNAMITE** Compressor/Limiter/Expander/Gate offers two channels each capable of performing 18 operating modes, including the basic modes of compression limiting, expansion and noise gating. The device may also be coupled for stereo operation.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$579.00

ALLIED PRICE \$ \_\_\_\_\_

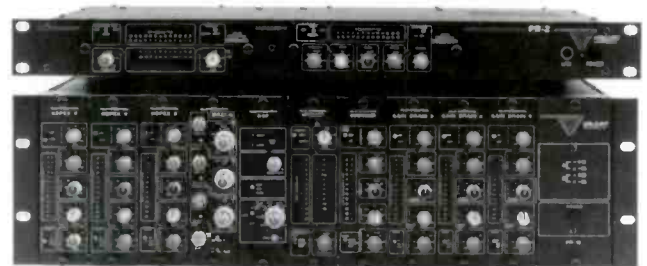


**VALLEY INTERNATIONAL**



The **COMMANDER** Compressor/Expander Module provides highly effective control over the dynamic range of audio signals. Interactive expanded compression for dramatic dynamic range control with complete freedom from unwanted noise. Other features include peak reversion correction and linear integration detection. This unit is designed to be housed in either of the Valley 800 powered rack mounting enclosures.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$420.00**

**ALLIED PRICE \$ \_\_\_\_\_**

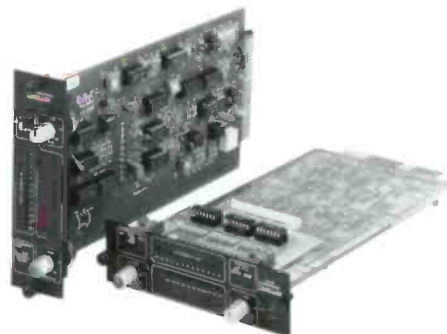

The **LEVELLER** Audio Level Controller is a single channel version of Valley's extremely popular two channel rack mount audio level control device. This unit is a new breed of single processor whose capabilities begin where those of ordinary limiters and compressors end. Warm natural sound with single-knob control. This unit is designed to be housed in either of the Valley 800 powered rack mounting enclosures.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$599.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The Valley **Model 415** Dynamic Sibilance Processor was designed to remove objectionable sibilance from vocals on individual tracks or those accompanied by mixed program material. Amazingly, the DSP performs this function without creating holes in the processed material or adversely coloring or affecting the tonal balance of the mix! *The real solution to vocal sibilance.*

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$749.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**GATEX** is four channels of sophisticated, yet easy-to-use noise gating and expansion capability. A truly innovative way to offer state-of-the-art technology that is both highly effective and readily understood. The TA-101 voltage controlled amplifier allows GATEX to process audio signals without coloration.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$599.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **AUTOGATE** is the most sophisticated noise gate/expander ever created by Valley! Yet, many of its processing parameters are automatically varied in response to the demands of the program material. It features frequency-selective gating, dynamic filter, and trigger pulse generator. This unit is effective and easy-to-use on a wide variety of instruments.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$599.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**EVENTIDE**

The **EVENTIDE H949** Harmonizer is used by top bands and top recording organizations around the world. They are incredibly versatile units combining digital delay, pitch change, and a variety of other features. Harmonizers can be used for doubling vocals, for delay equalization in sound reinforcement, and for many types of reverb/echo.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$3500.00**

**ALLIED PRICE \$ \_\_\_\_\_**

Eventide presents "the next step in pitch change technology" with its **PRO PITCH HARMONIZER® H969** giving you the cleanest, highest quality pitch change ever. The digital electronic-splicing algorithm attains glitch-free pitch changes. Its 16 bit linear PCM circuitry delivers superb audio quality in all modes. Wide range delay — up to 3 seconds, variable time presets and, delays, plus flanging and doppler features. This is Eventides best harmonizer ever!

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$4500.00**

**ALLIED PRICE \$ \_\_\_\_\_**




**WHITE INSTRUMENTS**

The **Model 4650** One-Third octave, R-C Active Graphic Equalizer is a tool for audio professionals. Its 28 One-Third Octave Filters sum together without ripple. Like all White Instruments equalizers, a great deal of care was taken in the design and implementation of the filters to assure the symmetry between boost and cut, uniform bandwidth and extremely tight frequency tolerances.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$649.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**TITUS**

For years broadcasters and production facilities have had the problem of what to do if a stereo channel or the program audio is from a broadcast, satellite feed, or stereo production mistake or the problem of matching and switching sources of two different levels. To correct these problems automatically as well as provide valuable ON LINE audio correction and monitoring requires an "intelligent" and sophisticated audio routing device. Such a device is the **Titus Technological Laboratories' MLW-1**.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1800.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**MARTI**

The **CLA-40** is a quality Compressor/Limiter Amplifier featuring symmetrical or asymmetrical peak limiting — switchable. The CLA-40 is well shielded and filtered for strong RF shields. It is a plug-in, modular construction with automatic gain control built in, solid-state and selectable releases times.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$495.00**

**ALLIED PRICE \$ \_\_\_\_\_**





## CRL



The **CRL Dynafex Model DX-2** incorporates patent pending noise reduction circuitry that provides up to 30dB of noise reduction. It is a two-channel device that will operate as a full stereo unit with both channels tracking together, or it may be used in the mono mode. The DX-2 can be utilized with -10, 0, +4 and +8dB reference levels. Selection of the proper reference level is made by a front panel switch on each channel enabling the unit to be interfaced easily with consumer, sound reinforcement, recording and broadcast levels.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$800.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## — NOISE REDUCTION —

## DBX



DBX has created the **Series 900** modular signal processing system. The **Model 902 De-esser** can be used as a conventional broadband de-esser or for attenuating only a user-determined portion of the high frequency range. The **Model 903 Compressor** with its **OVER EASY** compressor gives smoother, more listenable compression. The **Model 904 Noise Gate** is the ultimate noise gate, with a combination of features not found on any other noise gate. Features like adjustable attack and release rates, threshold adjustment from -30 to +30 dB, attenuation limit adjustment from 0 to 60 dB. The **Model 905 Parametric Equalizer** features 3 simultaneous bands of equalization, infinite notch on each band and shelving or contour on Hi and Lo. The **Model 933 Mixer/Distribution Amplifiers** is a 1-in/3-out or 3-in/1-out module. It's three channels are fully isolated from each other: shorts or overloads of one will not affect the others.



The **DBX Models 941A** and **942A** provide broadcasters with Type II noise reduction in the convenient Series 900 modular format. The 941A is a two-channel encode only Type II noise reduction unit, the 942A is a two channel decode only Type II noise reduction module which features an additional switchable provision for decoding DBX encoded discs.

- DBX 902.....\$359.00
- DBX 903.....\$359.00
- DBX 904.....\$359.00
- DBX 905.....\$379.00
- DBX 933.....\$199.00
- DBX 941A.....\$259.00
- DBX 942A.....\$269.00

- ALLIED PRICES \_\_\_\_\_
- ALLIED PRICES \_\_\_\_\_
- ALLIED PRICES \_\_\_\_\_
- ALLIED PRICES \_\_\_\_\_
- ALLIED PRICES \_\_\_\_\_
- ALLIED PRICES \_\_\_\_\_
- ALLIED PRICES \_\_\_\_\_



The **DBX 140A** simultaneous encode/decode broadcast noise reduction system is a two channel compressor/expander providing a minimum of 30 dB broadband audio noise reduction with a 10 dB increase in system headroom. The two channels feature independent encode and decode circuitry. Not compatible with Type I. The DBX system eliminates tape hiss in recording, and prevents the noise build-up normally encountered in transferring information from one recorded medium to another. L. R/P + R. R/P switchable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$569.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**ORBAN**

The versatility of the quasi-parametric midrange equalizer complements the simple, inflexible equalization found on many low-cost mixers, and permits the owners of such systems to get the exact reverb sound they want. In addition, the **111B** has very high basic input sensitivity (-30 dBm), and a front-panel input gain control makes it usable with all mixers—even those with unusually low level sends.

This versatility is complemented by a fully-professional 0 dBm balanced, floating output. This arrangement vastly improves immunity to RF interference, and assures easy integration into any system without introducing ground loops and hum.

**PRICE UPON APPLICATION LIST \$899.00**



The **622B** parametric equalizer consists of a balanced input buffer amplifier, and input attenuator, and four peak/dip equalization sections connected in series, assuring no interaction between sections. The final section contains a current booster capable of driving 600 ohm loads. The output of the input buffer and each of the equalization sections is monitored at all times by the overload indicator. The EQ IN/OUT switch bypasses all circuitry but the input buffer and output amplifier. It is arranged so that the gain and signal polarity are maintained constant in the IN and OUT modes.




**622A single channel....\$569.00 ALLIED PRICE \$ \_\_\_\_\_**

**622B dual channel.....\$879.00 ALLIED PRICE \$ \_\_\_\_\_**

**RET-5 optional output balancing transformer (1 per channel).....\$16.00**

The **ORBAN Mono Model 672A** and **Stereo Model 674A** are cost effective, professional, quasi-parametric equalizers with the convenience of graphic type EQ controls. Wide range high and low pass filters with 12 dB/octave Butterworth slopes follow the graphic section for added versatility. Each feature has been thoughtfully chosen and cleverly implemented to make the equalizer a particularly powerful tool in nearly all areas of audio.

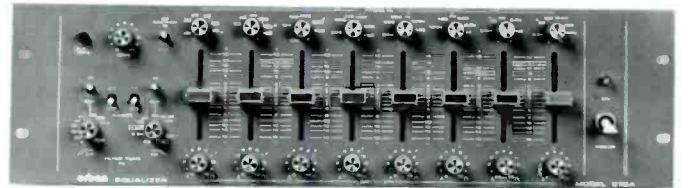

**672A mono.....\$689.00 ALLIED PRICE \$ \_\_\_\_\_**

**674A stereo.....\$1299.00 ALLIED PRICE \$ \_\_\_\_\_**

**Optional output balancing transformer, per channel.....\$16.00**


**ORBAN PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR THE ALLIED PRICE.**



**RANE**


The **GE 30** 1/3-octave graphic equalizer is a new functional concept which allows one single unit to provide all the capabilities that previously required two separate equalizers. It's the first graphic equalizer ever to let you switch from a +12/-15db boost-cut mode to a 0/-20dB cut-only mode by simply pushing a button on the back. The first with 60mm sliders, for maximized resolution in a 3.5" format. And the first with a user-switchable active direct-coupled or transformer-coupled complementary balanced output configuration as standard. Using 2nd generation Constant-Q filters, it provides all the proven advantages of constant bandwidth performance with even less overall ripple.

**GE 30.....\$699.00 ALLIED PRICE \$ \_\_\_\_\_**

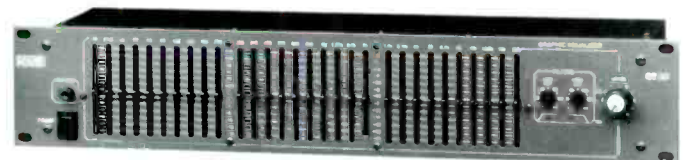



## KLARK-TEKNIK



Primarily the **DN300** 1/3 octave 30 band mono equalizer is used for tonal control, but the unit can be used in virtually any situation where equalization is required -- particularly studio listening rooms to improve the overall frequency response of the monitoring sound system.

**DN300** 1/3 octave mono, 30 band equalizer.....\$995.00

ALLIED PRICE \$ \_\_\_\_\_



The **DN332** dual 2/3 octave 16 band equalizer is used for stereo tonal control, and particularly in outside broadcasting to equalize lines. The use of the DN332 can provide the engineer with two full frequency range 2/3 octave channels of equalization.

**DN332** Dual 2/3 octave, 16 band.....\$1095.00

ALLIED PRICE \$ \_\_\_\_\_

**DN332B** DN332 with balanced outputs.....\$1245.00

ALLIED PRICE \$ \_\_\_\_\_



Primarily the **DN360** dual 1/3 octave 30 band equalizer is used for stereo tonal control, but particularly in Audio and Video cassette duplication to correct for frequency response or tonal irregularities during mastering and to adjust for tape loading characteristics.

**DN360** dual 1/3 octave, 30 band equalizer.....\$1625.00


ALLIED PRICE \$ \_\_\_\_\_

**DN360B** DN360 with balanced output.....\$1775.00

ALLIED PRICE \$ \_\_\_\_\_

**KLARK-TEKNIK PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**


## UREI

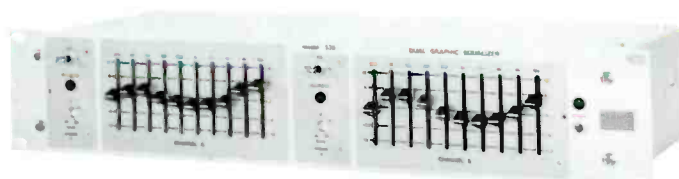

The **UREI 535** dual graphic equalizer offers 10 filter sections per channel with increased control range, and more output capability. The 535 provides 12 dB of boost or cut at each of its 10 frequencies, which are centered at ISO one-octave increments from 31.5 Hz to 16 kHz, with balanced bridging differential amplifier inputs, variable gain, floating transformer isolated outputs of 150 ohms or greater load and is rack-mountable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$596.00**


ALLIED PRICE \$ \_\_\_\_\_

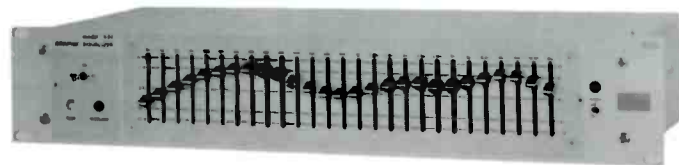

The **Model 537** is a 1/3 octave equalizer set for general purpose frequency response adjustment of audio signals. It offers 27 adjustable equalizers on ISO 1/3 octave center frequencies, 12 dB boost or attenuation at each center frequency, stepless-noiseless controls, precision calibrated, state-of-the-art L-C filter circuitry, low distortion-low noise with minimum phase shift, zero insertion loss and is rack-mountable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1096.00**

ALLIED PRICE \$ \_\_\_\_\_

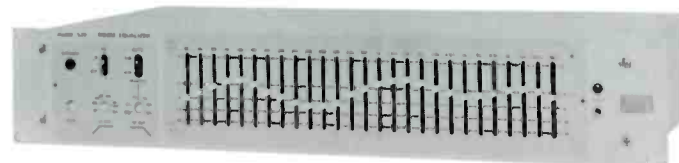

The **Model 539** is an active filter set specifically designed for room "equalization" or tuning. The 539 utilizes advanced circuit technology and latest state-of-the-art components to achieve quantum improvements in performance and at lower cost. Signal to noise ratio is better than 110 dB at maximum output. Filter parameters have been optimized to produce excellent combining and minimum phase shift.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1196.00**

ALLIED PRICE \$ \_\_\_\_\_



## EVENTIDE

EVENTIDE, the world leader in digital broadcast audio delays, presents the "no compromise" economy obscenity delays, the mono **BD931** and stereo **BD932** each in 3.2 and 6.4 second configurations. Priced to be cost effective even for stations that air only limited talk programming. Digital RAM based circuitry eliminates all the problems of tape loop delays. 16 kHz band width.

- BD931 mono 3.2 sec.....\$1795.00**      **ALLIED PRICE \$** \_\_\_\_\_
- BD931 mono 6.4 sec.....\$2295.00**      **ALLIED PRICE \$** \_\_\_\_\_
- BD932 stereo 3.2 sec.....\$2595.00**      **ALLIED PRICE \$** \_\_\_\_\_
- BD932 stereo 6.4 sec.....\$4495.00**      **ALLIED PRICE \$** \_\_\_\_\_

The **Model BD955** was designed specifically for policing of live talk shows. It is a RAM based digital delay line, available in two frequency ranges, 7.5 kHz for reproduction of telephone audio and 15 kHz for quality reproduction of the full spectrum. There are two maximum delay times available, 3.2 or 6.4 seconds. The unit has a unique "catch up" feature which enables it, after the objectionable material has been dumped, to regain its delay safety margin automatically. Two of the same model are required for stereo.

- BD955 7.5 kHz 6.4 sec....\$3350.00**      **ALLIED PRICE \$** \_\_\_\_\_
- BD955 15 kHz 3.2 sec....\$3350.00**      **ALLIED PRICE \$** \_\_\_\_\_
- BD955 15kHz 6.4 sec.....\$4300.00**      **ALLIED PRICE \$** \_\_\_\_\_

**Stereo interconnect add \$150**

**EVENTIDE PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR THE ALLIED PRICE.**

The **BD980** features an advanced, de-glitched CATCH-UP system. When objectionable program audio is "DUMP"ed with the BD980, delay catch-up is fast and audio quality is clean. Contributing to the unit's superb audio quality is the 16-bit linear PCM design and 50kHz sampling rate. Frequency response extends to 20kHz.

Two independent stereo channels of delay are standard. Maximum delay time is an unprecedented 10 seconds. Delay time can also be manually selected with resolution to one millisecond. A DELAY MAX switch permits instant return to maximum delay.

The BD-980 is also the first and only broadcast delay to feature time compression capabilities.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$5495.00**

**ALLIED PRICE \$** \_\_\_\_\_

## AUDIO DIGITAL


The **TC-4** Broadcast Digital Processor is a state-of-the-art advancement in broadcast profanity delay. It features delay time of 6.8 seconds, with a 15kHz bandwidth and 85dB dynamic range. The optional (user-installable) auxiliary card allows memory dump in less than two seconds, as well as a delay time catch-up feature to allow starting in near real time.

- MANUFACTURER'S SUGGESTED LIST PRICE.....\$1395.00**
- Catch-up option.....\$250.00**
- Stereo sync. option.....\$70.00**



CALL FOR THE ALLIED PRICE

## VALLEY INTERNATIONAL

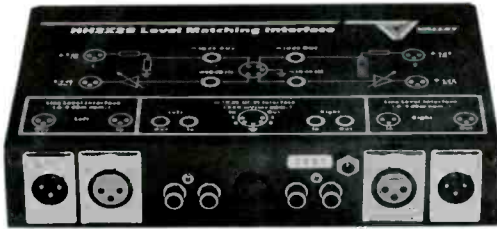

While the **HH 2 x 2B** Level Matching Interface immediately resolves the level and impedance matching problems associated with interfacing -10 dB equipment to the studio and broadcast standards of +4 and +8 dB, it also ensures immunity from RF pickup and hum, thanks to electronic balancing of the +4/+8 inputs and outputs. The HH2 x 2B is the immediate solution to level and impedance matching problems.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$279.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## HENRY




The **MATCHBOX** is the ideal, inexpensive way to correctly interconnect semi pro equipment with pro studio gear. The MATCHBOX is bi-directional, with four independent amplifiers for stereo input and output interface. Two amplifiers convert a stereo IHF HI-Z unbalanced source to LO-Z balanced outputs at studio level. A second pair of amplifiers converts the stereo balanced studio line source to unbalanced IHF outputs to feed the inputs of an IHF device. All circuitry is active and direct coupled for absolute sonic transparency.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$195.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## RTS

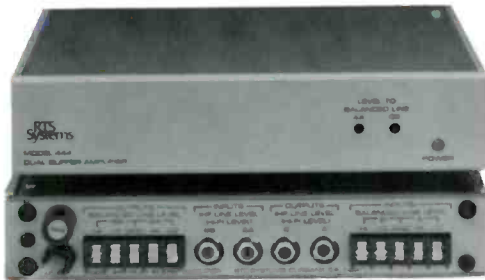

The **Model 444** is a dual, two channel buffer amplifier designed to interface professional systems with semi-pro and high fidelity equipment. Although components designed for home use offer desirable features for studio applications, interconnections between the two kinds of equipment are complicated by differences in levels, impedances and balanced and unbalanced modes of operation. The 444 corrects these problems while maintaining signal integrity.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$368.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## ZERCOM



The **GAIN BOX** was designed and built as an audio boost amplifier for many applications around the broadcast station. It has two independent channels of gain which means it can be used for stereo or as two separate monaural amplifiers. The two channels can be wired in series for up to 60dB gain.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$179.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## TRISTECH AUDIO

The price is right-on for the **FX-100** matching box and we ran our own tests. Here are the results:

|                | <u>Unbal IHF In/Bal Out</u> | <u>Bal In/Unbal IHF Out</u> |
|----------------|-----------------------------|-----------------------------|
| Maximum Output | +25 DBM                     | +19 DBM                     |
| Maximum Input  | +19 DBM                     | +25 DBM                     |
| THD            | .002%                       | .003%                       |
| IMD            | .005%                       | .003%                       |
| Noise          | 100 dB (unweighted)         | 98 dB (unweighted)          |
|                | 90 dB (unweighted)          | 80 dB (unweighted)          |

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$129.95**

**ALLIED PRICE \$ \_\_\_\_\_**

**SENTRY SYSTEMS**

The **AIR SENTRY** is designed to constantly monitor the presence of an audio signal and to energize a relay when the audio is absent. Activation of the relay is front panel adjustable from 4 to 20 seconds. The relay may in turn be used to monitor any stereo or mono audio source such as audio from an AM/FM tuner, TV receiver or modulation monitor. AIR SENTRY is built to broadcast standards of reliability. Quick and easy rear panel connections via "Molex" type connectors (mating ends supplied).



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$295.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**CONEX**

The **CONEX CG-25** Hz tone generator has built-in high pass filters for both the left and right channels, front panel LED indication of tone duration, silence and maximum length of untimed tone. All timing intervals, tone lengths and audio levels are easily adjustable from the rear panel. Standard six-pin "Cinch Jones" type connectors are provided for simple connection between the console and the recorder. The tone is switch-selectable to allow recording tone on either channel. For ease of servicing all integrated circuits are socket mounted. The CG-25 offers low distortion circuitry, the oscillator and audio have less than .5% total harmonic distortion. Also rack mountable - Call for details.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$350.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **Conex CS25 B-10** dual 25 Hz tone sensor is a compact and reliable bridging-type 25 Hz tone sensor for use in broadcast automation and tape control systems. The unit features two independent sensors, allowing very economical expansion of existing systems. The CS-25 offers front panel stop-delay adjustment to accommodate any tape format, indicator lights on the front panel to indicate presence of tone, front panel disable switches which inhibit the relays allowing the tape to run without stopping at tones or signaling of the automation system.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$389.00**


**ALLIED PRICE \$ \_\_\_\_\_**

**ALLIED**  
**EQUIPMENT EXCHANGE**


**WE BUY, SELL & TRADE SELECTED  
USED RADIO EQUIPMENT**

Turn that old used equipment into "CASH" on your next transaction with Allied! Look in the closet . . . under the bench . . . transmitter room . . . etc. Let us know what you find. Then give us a call and "wheel & deal" with Jim Jones.

**CALL THIS SPECIAL NUMBER  
(317) 962-1471**

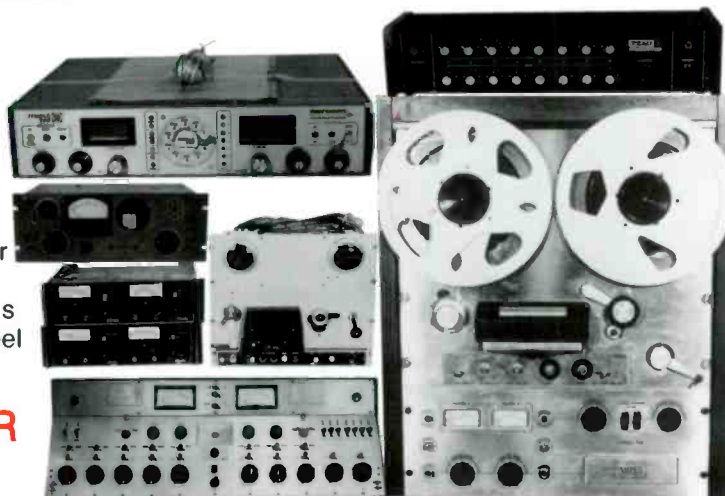



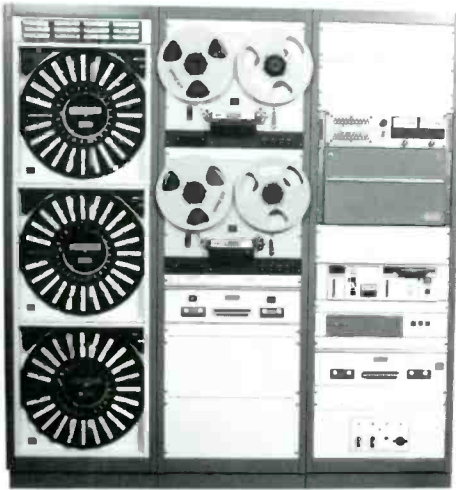

## **SONOMAG (SMC)**

The industry's most cost effective programming tool, the **ESP-2**, will operate fully automated, satellite fed, live assist, or in any combination.

The ESP-2's 4,000 event memory (expandable to 8,000) allows programming days in advance. With its 682 step, seven day, user programmable clock, the ESP-2 executes time instructions for up-dates, network joins or external time functions with ease.

The ESP-2 gives the operator full manual control of up to 20 audio sources for live assist operation or semi-auto operation.

### TYPICAL MUSIC SERVICE SYSTEM

ESP-2 Programmer (Rack Mounted, with Remote Control Head)


3-Random Access Carousels

3-SMC/OTARI ARS-1000 Reel to Reel Reproducers with SMC exclusive Auto-Rewind/Recue and 25 Hz tone sensors

2-721 Dual Cartridge Playbacks (4 single play sources)

3-System Racks, fully cabled

**PRICES VARY WITH APPLICATION CONTENT - CALL ALLIED**

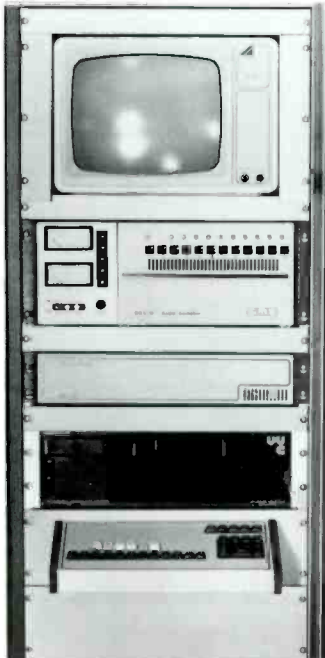

### MUSIC — SATELLITE PROGRAMMER

The **MSP-12** is the practical programmer for satellite or syndicated music services and full live assist operations, including full random access control for carousels and other multi-cartridge reproducers. The MSP-12 provides the features found only in High Level Programmers costing thousands more, including; linking, clear-text logging, delayed starting, under programming protection and special insert abilities. It also features a deep 2,000 event memory, expandable to 4,000 events with full sub-routine capability and 250 stop user programmable clock. It directly interfaces to Satellite Receiver Tone Decoders.

The MSP-12 gives every broadcaster, cable TV and background music operation every able and cost effective programming control tool.

**CALL FOR THE ALLIED PRICE**



The proven features of earlier SMC Carousels have been retained including cast aluminum drum, steel cartridge trays and ball bearing cross shaft. Now the Model **450 (Mono)** and **452 (Stereo)** combine microprocessor flexibility for Bi-directional operation, front monitoring lights, and enable system to allow off-air audition. The tape deck, the drive motors, and the electronic chassis are all readily field-serviceable.

**CALL ALLIED FOR PRICE SPECIFICS**

**MPA**

The **PROGRAMMER 3A** is the latest in a series of highly successful radio music programming aids. The 3A allows the stations to take advantage of music formats which have been recorded on reel-to-reel tape for automation systems. Up to four reel-to-reel tape decks can be controlled by PROGRAMMER 3. The outputs can be wired mono or stereo directly to program and cue buses of a studio console eliminating the need for additional console inputs. A memory circuit allows the operator to select the music deck he will play next.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$990.00**

**ALLIED PRICE \$ \_\_\_\_\_**

Designed and built to fill a need in the broadcast field, the **PERSONS 25 Hz** tone processor performs all the tone handling functions required to interface a reel-to-reel recorder with an automation or "live assist" system. One 25 Hz tone processor will handle one stereo or two mono tape decks. Each 25 Hz tone processor consists of two 25 Hz tone decoders tied to two program amplifiers with 25 Hz notch filters. The 25 Hz tone detectors offer accurate, false-free recognition of tones. The stop/delay timers are precise and repeatable. All logic circuits are relay contacts for interfacing with any tape deck and system. Incoming and outgoing terminations are brought to a convenient, clearly marked terminal strip on the rear.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$399.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**CD MULTIPLAY**

The **Model AMCDS-1000A CD Multiplay System** is the ultimate tool for broadcasters. Imagine 100 CDs under lock and key (that's 1000 + songs) completely programmable to randomly select disc and cut. Not only that, but it cues to music. It's a dream come true for program directors who know the future is compact discs. The AMCDS-1000A is equipped with an on-board main microprocessor for system control and sub-microprocessor for CD playback operations. Additional features include remote start capability, memory retention of selection being played in the event of a momentary power failure, and a bi-directional carousel for automatic disc location.



**Entire Contents Copyright  
Allied Broadcast Equipment, Inc.**

# Allied's Broadcast Systems Division Can Design, Construct, Install And Test Your Next Studio Or Transmitter Facility Using Any Of The 1,000+ Products In This Catalog!



**A**llied has always been your best source for broadcast equipment. Now, we're also your best choice for complete broadcast systems and facilities.

The Allied Broadcast Systems Division can do it all, from renovating a single studio to building an entire station from the ground up. Whatever your requirements, we'll meet them — on time, on spec and on budget.

And that goes for RF, transmitter, satellite, and automation projects as well as studio packages. Our knowledgeable and experienced staff of broadcast facility design professionals can choose from the industry's broadest array of equipment and broadcast furniture in the business, including a number of Allied-

exclusive lines. So you'll get exactly the facility you want.

Best of all, you'll get a hassle-free job, because Allied handles it all, with single-source responsibility. Allied Broadcast Systems is one more way we give full service to broadcasters.

## DO YOU HAVE AN UPCOMING PROJECT?

Talk it over with the experts at Allied Broadcast Systems Division. No obligation of course.

(714) 752-6664  
FAX (714) 752-0855  
TLX 681463 ALLIED SYS



## COMPUSONICS

The **DSP 1500** is a stereo digital audio cartridge recorder/player designed for the professional broadcaster. It can be used with, or replace any analog broadcast cartridge recorder/player in use today. Recordings are made in CompuSonics' patented CSX format, providing the broadcaster with exceptional digital sound quality. Multiple recordings on one disc can be programmed to play back as a group or individually. The DSP 1500 also provides an auxiliary cue tone to start another playback device.



## DENON

The **Denon DN-950F CD Cart Player** is designed for actual broadcasting and production activities. Simple design and ease-of-operation have been stressed. It features quick cartridge loading and outstanding sound quality of the compact disc. CD's are used and stored in the same manner as current tape cartridges. Store CD's in CD cartridges well protected. Track selection is facilitated by a quick response Rotary Pulse Encoder dial. There is no need for constant watching as the remaining time is digitally displayed and can be checked any time during play. Professional XLR connector.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1349.00**  
**ALLIED PRICE \$ \_\_\_\_\_**



## OTARI

The **Otari CTM-10 Series** consists of NAB audio cartridge players and recorders designed for broadcast and audio post-production professionals. The series consists of three models: the CTM-10R stereo record/play deck, and the CTM-10RM mono record/play deck, and the CTM-10 mono + stereo playback deck, to which recording capability is a simple retrofit. Three CTM-10 series decks may be rack mounted side-by-side in only 5¼" of 19" rack space. The record electronics unit, housed in a separate chassis, is the same size. The tape speed of CTM-10 transports may be user-converted to 15, 7.5 or 3.75 ips by means of internal jumpers.

The CTM-10 record electronics unit incorporates Dolby HX-Pro\* bias optimization circuitry.

All CTM-10 transports feature long-life heads, brushless DC PLL servo capstan motors, dynamic braking, active balanced inputs and outputs, ceramic capstan shafts, and precision milled alloy deckplates for reliability and stable performance. (\*HX-Pro is a trademark of the Dolby Licensing Corp.)

**Model**

**CTM-10 R Stereo Record/Play..... \$4518.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

**CTM-10 RM Mono Record/Play..... \$4143.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

**CTM-10 M&S Mono + Stereo Playback..... \$2895.00**  
**ALLIED PRICE \$ \_\_\_\_\_**





## FIDELIPAC

The **DYNAMAX CTR10 Series** of cartridge players and recorders feature all the mechanical advances introduced in the Dynamax CTR100 Series, and all but the most esoteric electronic features, as well. With the CTR 10 Series, studios will be able to replace older equipment, in a most cost effective way, and meet the critical demands of engineers, programmers and listeners. The advanced features are all standard.

The CTR10 Series includes both Mono and Stereo units, with secondary (150Hz) and tertiary (8kHz) cue tones. There is also a Fast Forward mode, which can be used manually or controlled automatically by the secondary cue tone.

The **CTR100 Series** offers features no other tape cartridge machine provides. Among the outstanding features the CTR100 offers are the exclusive CARTSCAN System which allows the operator to intermix cartridges recorded in various audio formats. The system also provides an auxiliary output to activate equipment such as a Dolby® encoder or decoder.

PRICES ON APPLICATION FOR CTR10 & CTR100

## BROADCAST ELECTRONICS



The **2100** family of tape cartridge machines combines versatile operation, quality components and top specifications, all at an economical price. There's more value in the 2100 series than ever found before in any professional cart machine. The combination of advanced engineering and cost saving production methods produces a cart machine with double value for the most quality-minded users.

**2100CP Play, Mono...\$1325.00 ALLIED PRICE \$ \_\_\_\_\_**

**2100CRP Rec/Play, Mono...\$1995.00  
ALLIED PRICE \$ \_\_\_\_\_**

**2100CPS Play, Stereo...\$1425.00  
ALLIED PRICE \$ \_\_\_\_\_**

**2100CRPS Rec/Play, Stereo...\$2295.00  
ALLIED PRICE \$ \_\_\_\_\_**

Accessory prices upon request



Model PT-90PS



Model PT 90-RTS

The **Phase Trak 90™** is a completely integrated electronic package specifically designed to meet the changing needs of today's broadcast professional. Features that are optional or unavailable in other cart machines are standard equipment in the Phase Trak 90, such as; DynaFex® noise reduction, non-repeat lockout, automatic audio muting, phase loc U precision adjustment head block, innovative cartridge guidance system, true modular design with plug-in assemble, and much more. And, if you need record capability in your Phase Trak 90, try the new Phase Trak 90 Record/Play Cartridge machine.

**PT-90PS.....\$2,395.00**  
**PT-90RPS.....\$3,695.00**

ALLIED PRICE \$ \_\_\_\_\_

## BROADCAST ELECTRONICS 3000 SERIES

**Series 3000** machines have all the standard features: a direct drive hysteresis synchronous motor, an air damped solenoid with excellent reserve capability, and a 1/2" thick machined aluminum deck. In addition, these machines are loaded with extras like the Phase Lok III head bracket, low voltage solenoid switching, advanced integrated circuit/solid state design with exceptionally wide dynamic operating ranges, long life NORTRONICS DURACORE heads, and an outstanding set of performance specifications.

|                                       |                       |
|---------------------------------------|-----------------------|
| 3100AP Play, Mono...\$1700.00         | ALLIED PRICE \$ _____ |
| 3100APS Play, Stereo...\$1850.00      | ALLIED PRICE \$ _____ |
| 3200AP Play, Mono...\$1725.00         | ALLIED PRICE \$ _____ |
| 3200ARP Rec/Play, Mono...\$2725.00    | ALLIED PRICE \$ _____ |
| 3200APS Play, Stereo...\$1875.00      | ALLIED PRICE \$ _____ |
| 3200ARPS Rec/Play, Stereo...\$3075.00 | ALLIED PRICE \$ _____ |
| 3400AP Play, Mono...\$1850.00         | ALLIED PRICE \$ _____ |
| 3400APS Play, Stereo...\$2000.00      | ALLIED PRICE \$ _____ |
| 3400ARP Rec/Play, Mono...\$2775.00    | ALLIED PRICE \$ _____ |
| 3400ARPS Rec/Play, Stereo...\$3125.00 | ALLIED PRICE \$ _____ |

Accessory prices upon request

**BROADCAST ELECTRONICS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

## 5300 SERIES

The **Model 5300C** is the most advanced multi-deck cartridge machine on the market. It is a top-of-the-line pro machine that features solid-state integrated circuit design, a direct drive hysteresis synchronous motor, air damped solenoid, 1/2" thick machined aluminum deck and long life NORTRONICS DURACORE heads. Features unique to this multi-deck design are plug in decks, computer ribbon cabling, rear panel LED service aids, and run lights adjacent to each deck.

|   |                       |
|---|-----------------------|
| 5301C Play, Mono...\$3400.00                | ALLIED PRICE \$ _____ |
| 5302C Cue Tones/Play,<br>Mono...\$3600.00   | ALLIED PRICE \$ _____ |
| 5303C Play, Stereo...\$3900.00              | ALLIED PRICE \$ _____ |
| 5304C Cue Tones/Play,<br>Stereo...\$4100.00 | ALLIED PRICE \$ _____ |

Accessory prices upon request

**BROADCAST ELECTRONICS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**





## BROADCAST ELECTRONICS



The **5400C** is a new, compact "AA" size 3-deck machine designed for the purist. Superb electronics produce 'clean' sound because of low wow & flutter from the direct drive synchronous motor, 52dB stereo S/N, the Phase Lok IV head bracket for optimum stereo phasing, and the solid 1/2" aluminum precision machined deck for stable cartridge positioning. Silent, cool operation is a key feature of the 5400.

**5401C Play, mono.....\$3500.00 ALLIED PRICE \$ \_\_\_\_\_**

**5402C Cue Tones/Play, mono.....\$3700.00  
ALLIED PRICE \$ \_\_\_\_\_**

**5403C Play, stereo.....\$4000.00 ALLIED PRICE \$ \_\_\_\_\_**

**5404C Cue Tones/Play, stereo.....\$4200.00  
ALLIED PRICE \$ \_\_\_\_\_**

## AUDICORD



The **Models E-10** through **E16** offer modular construction, interchangeable transports and other assemblies, 1 or 3 tones in mono or stereo, a replay reminder system, full remote control that's automation compatible with latching connectors, and a slip/lift cover.

**E-10 mono, 1 cue, desk.....\$819.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-10R mono, 1 cue, rack mount.....\$819.00  
ALLIED PRICE \$ \_\_\_\_\_**

**E-11 mono, 3 cue, desk.....\$849.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-11R mono, 3 cue, rack mount.....\$849.00  
ALLIED PRICE \$ \_\_\_\_\_**

**E-15 stereo, 1 cue, desk.....\$889.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-15R stereo, 1 cue, rack mount.....\$889.00  
ALLIED PRICE \$ \_\_\_\_\_**

**E-16 stereo, 3 cue, desk.....\$919.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-16R stereo, 3 cue, rack mount.....\$919.00  
ALLIED PRICE \$ \_\_\_\_\_**

*Accessory prices upon request*

The **Models E-20** through **E-26** offer a unique slide out panel for control access, mono or stereo record/playback, 1 or 3 cue tones, and auto switching meters. If top quality recording and playback is what you're looking for, try AUDICORD first.

**E-20 mono, 1 cue, desk.....\$1379.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-20R mono, 1 cue, rack mount.....\$1379.00  
ALLIED PRICE \$ \_\_\_\_\_**

**E-21 mono, 3 cue, desk.....\$1419.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-21R mono, 3 cue, rack mount.....\$1419.00  
ALLIED PRICE \$ \_\_\_\_\_**

**E-25 stereo, 1 cue, desk.....\$1619.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-25R stereo, 1 cue, rack mount.....\$1619.00  
ALLIED PRICE \$ \_\_\_\_\_**

**E-26 stereo, 3 cue desk.....\$1659.00 ALLIED PRICE \$ \_\_\_\_\_**

**E-26R stereo, 3 cue, rack mount.....\$1659.00  
ALLIED PRICE \$ \_\_\_\_\_**

*Accessory prices upon request*

**AUDICORD PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**



## AUDICORD

The **Models E-30** through **E-36** are three playback configurations that feature modular construction, interchangeable transports, 1 or 3 cue tones mono or stereo, replay reminder system, full remote control that's automation compatible, latching connectors, and slip/lift cover. These models offer three independent outputs and three independent control systems.

- E-30 mono, 1 cue, desk.....\$2429.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-30R mono, 1 cue, rack mounted.....\$2429.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-31 mono, 3 cue, desk.....\$2519.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-31R mono, 3 cue, rack mounted.....\$2519.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-35 stereo, 1 cue, desk.....\$2629.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-35R stereo, 1 cue, rack mounted.....\$2629.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-36 stereo, 3 cue, desk.....\$2719.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-36R stereo, 3 cue, rack mounted.....\$2719.00 ALLIED PRICE \$ \_\_\_\_\_**

Accessory prices upon request

The **Models E-50** through **E-56** are dual transport record/playback machines which allow single deck or dual deck recording, sound on sound, composites and stereo to mono mix dubs. Features include a slide out front panel, interchangeable transports and other assemblies, 1 or 3 cue tones mono or stereo, a replay reminder system, full remote control that's automation compatible and latching connectors, and slip/lift cover.

- E-50 mono, 1 cue, desk.....\$2219.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-50R mono, 1 cue, rack mounted.....\$2219.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-51 mono, 3 cue, desk.....\$2279.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-51R mono, 3 cue, rack mounted.....\$2279.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-55 stereo, 1 cue, desk.....\$2539.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-55R stereo, 1 cue, rack mounted.....\$2539.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-56 stereo, 3 cue, desk.....\$2599.00 ALLIED PRICE \$ \_\_\_\_\_**
- E-56R stereo, 3 cue, rack mounted.....\$2599.00 ALLIED PRICE \$ \_\_\_\_\_**


Accessory prices upon request

These new cartridge machines are more than just attractive. They were designed new from the cabinet feet up, selecting the materials which offered the best manufactured cost consistent with functional integrity to insure the most machine for the dollar. Still, the "**S-Series**" contains new operating features, maintenance access and rugged construction to keep pace with modern broadcast operations.


### PLAYBACK

- S-11 mono, 3 cue, desk.....\$1029.00 ALLIED PRICE \$ \_\_\_\_\_**
- S-11R mono, 3 cue, rack mounted.....\$1029.00 ALLIED PRICE \$ \_\_\_\_\_**
- S-16 stereo, 3 cue, desk.....\$1119.00 ALLIED PRICE \$ \_\_\_\_\_**
- S-16R stereo, 3 cue, rack mounted.....\$1119.00 ALLIED PRICE \$ \_\_\_\_\_**

AUDICORD PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.

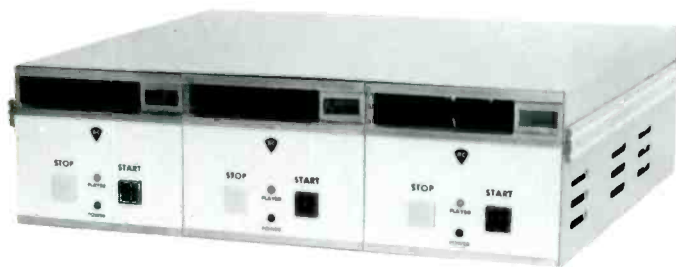

**E-SERIES THREE TRANSPORT PLAYBACK**

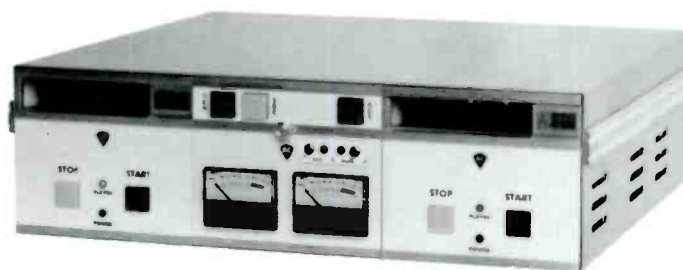

**E-SERIES DUAL TRANSPORT RECORD/PLAYBACK**



**S-SERIES PLAYBACK**

# CARTRIDGE MACHINES

## AUDICORD



S-21 mono, 3 cue, timer, desk.....\$1799.00  
ALLIED PRICE \$ \_\_\_\_\_

S-21R mono, 3 cue, timer, rack.....\$1799.00  
ALLIED PRICE \$ \_\_\_\_\_

S-26 stereo, 3 cue, timer, desk.....\$1989.00  
ALLIED PRICE \$ \_\_\_\_\_

S-26R stereo, 3 cue, timer, rack.....\$1989.00  
ALLIED PRICE \$ \_\_\_\_\_

### DELAY MACHINES

S-32 mono network delay, 3 cues + timer, desk.....\$1889.00  
ALLIED PRICE \$ \_\_\_\_\_

S-32R mono network delay, 3 cues + timer,  
rack mounted.....\$1889.00 ALLIED PRICE \$ \_\_\_\_\_

The premium A.C. Hysteresis Synchronous Motor used by Audi-Cord in the **Twin Deck** is so low in heat and escape field that the addition of the double-ended shaft was a natural practicality. With this design, the lower deck can easily be positioned and adjusted to duplicate the results of the upper traditional deck. A side azimuth adjust head mount was designed to facilitate running adjustment of phase and azimuth.—This makes for a true "Twin Deck," operation!

TDS-1 twin transport, mono, 3 cues, desk.....\$1499.00  
ALLIED PRICE \$ \_\_\_\_\_

TDS-1R twin transport, mono, 3 cues, rack mount.....\$1538.00  
ALLIED PRICE \$ \_\_\_\_\_

TDS-6 twin transport, stereo, 3 cues, desk.....\$1679.00  
ALLIED PRICE \$ \_\_\_\_\_

TDS-6R twin transport, stereo, 3 cues, rack mount.....\$1718.00  
ALLIED PRICE \$ \_\_\_\_\_



Accessory prices upon request

AUDICORD PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.



## TAPECASTER

For the broadcaster who doesn't need an expensive multi-deck cart machine configuration, the TAPECASTER line has become a standard. With either stereo or mono playback or playback/record machines available, the dependable, sturdy TAPECASTER line is more machine for the dollar.



X700RP mono record/play...\$1050.00 ALLIED PRICE \$ \_\_\_\_\_

X700P mono play.....\$765.00 ALLIED PRICE \$ \_\_\_\_\_

X700RPD mono record/play/delay.....\$1195.00  
ALLIED PRICE \$ \_\_\_\_\_

X700RPS stereo record/play.....\$1345.00  
ALLIED PRICE \$ \_\_\_\_\_

X700PS stereo play.....\$945.00 ALLIED PRICE \$ \_\_\_\_\_

Accessory prices upon request

TAPECASTER PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICE. CALL FOR TODAY'S ALLIED PRICE.

## AUDIOMETRICS



The **Premium Plug-In Card** by **Indy Audio** is a direct retrofit to replace existing cards in the ITC Premium Series Cart Play machines. Upgrade your faithful ITC's with technology of the 1990's. Direct plug-in — *No modifications*. Slow rate, rise time, noise, distortion . . . all state-of-the-art.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$229.00

ALLIED PRICE \$ \_\_\_\_\_



## CAPITOL

The audio cartridge tape that has become a standard for broadcasters the world over is the **CAPITOL A2**. For stations who really care about how they sound, the A2 is the logical answer to better sound.

**CALL FOR TODAY'S ALLIED PRICE**

The key feature of the **Capitol AA4** is the new SGS-4 broadcast mastering tape. When recorded on a high quality cartridge recorder, the SGS-4 tape can produce virtually identical copies of the best analog or digital mastering tapes.

**CALL FOR TODAY'S ALLIED PRICE**



---

## FIDELIPAC

The **Model 300** broadcast audio cartridge provides performance at a price that is within the budget of all radio and TV broadcasters. Its endurance under severe operating conditions in everyday studio operations is surprising, frequently lasting over five years with only replacement of worn tape and pressure pads. *MONO ONLY.*

**CALL FOR TODAY'S ALLIED PRICE**

The **Master Cart**, unlike conventional cartridges, does not rely upon the cartridge for precision tape guidance. Master Cart's tape path is controlled primarily by the tape guides in the cartridge machine. This neutrality of tape flow is assured by a unique tape path plus precision molding of the cartridge base, reel and top cover. Performance is repeatable each time the cartridge is used and also from cartridge to cartridge.

**CALL FOR TODAY'S ALLIED PRICE**

Loaded with a totally new cobalt tape, **Dynamax Cobalt** outperforms all other tape cartridges. The shell is constructed of high-grade engineering plastic for more strength, better heat stability and better dimensional accuracy. New pressure pad material provides cleaner running tape and reduced head wear. An improved reel and bearing system reduces flutter to the vanishing point. A newly modified internal tape path yields more accurate tape travel, less tape wear, lower scrape flutter and vastly enhanced phase uniformity.



---

## SCOTHCART

The **ScotchCart II® AA** broadcast cartridge represents a breakthrough in technology beyond anything previously experienced in the industry. A revolutionary design eliminates pressure pads, utilizes a non-rotating hub, and now includes a new, high output, low-noise, lubricated tape for recording at high levels without performance loss. Tape and cartridge complement each other like never before in the ScotchCart II® broadcast cartridge.



**"Prices are subject to change without notice"**



## FIDELIPAC

The **DYNAMAX ESD10** gives you reliable splice detection and deep cart erasure, for flawless sound reproduction. It achieves an erase depth of 75dB or more. Dual erase heads are used. A patented splice find system — the most reliable detector ever built, requires no sensitivity adjustments.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$1125.00

ALLIED PRICE \$ \_\_\_\_\_



## ALLIED CART LABELS

For labeling those all important commercial, music and program audio cartridge tapes, the **Allied Cart Label** will stick. If label peeling is a problem, then you need a label from **ALLIED!** They stay when they should. They come off completely when they should.

CART LABELS.....\$0.20 per sheet



## SCOTCH AVX

Superior design and performance make Scotch AVX truly dependable. **Scotch AVX Studio Master Cassettes** bring you one step closer to perfection in your search for exceptional performance and sound reproduction. The cassette shell and internal components have been engineered to deliver outstanding mechanical reliability. The superior electromagnetic capabilities of the tape formulation guarantees superb sound under the most severe conditions.

PRICES UPON APPLICATION

## GARNER

Imagine erasure depth of video tape that exceeds professional standards in 5 to 16 seconds in just one pass (two for larger units) — doesn't matter if it's video cassette, cartridge or reel. You're assured of superb, clean, quiet erasure to the most stringent recording standards.

| MODEL DESCRIPTION        | PRICE                            |
|--------------------------|----------------------------------|
| 270 1" x 8½" dia. reel   | \$2990.00..ALLIED PRICE \$ _____ |
| 1200 1" x 10½" dia. reel | \$4890.00..ALLIED PRICE \$ _____ |
| 1400* 1" x 14" dia. reel | \$5790.00..ALLIED PRICE \$ _____ |
| 1600 1" x 16" dia. reel  | \$6590.00..ALLIED PRICE \$ _____ |

\* Erases 1" high coercivity video tape and video cassettes

It takes just four seconds to erase all sizes and types of audio tape up to 16" with **GARNER** degaussers. **GARNER** has designed their units to automate your tape erasing operations and eliminate residual noise problems, and their customers say they have a winner!

| MODEL DESCRIPTION    | PRICE                             |
|----------------------|-----------------------------------|
| 70A up to 7" reel    | \$990.00....ALLIED PRICE \$ _____ |
| 105A up to 10½" reel | \$1590.00..ALLIED PRICE \$ _____  |
| 114 up to 14" reel   | \$2190.00..ALLIED PRICE \$ _____  |
| 116 up to 16" reel   | \$2390.00..ALLIED PRICE \$ _____  |

GARNER PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.



## AUDIOLAB

The **AUDIOLAB TD-1B** tape degausser with automatic overhead thermal protection erases audio tape, carts and cassettes. It erases up to 3/4" tape widths, accommodates up to 10 1/2" reels, provides a wide focused magnetic field to assure complete erasure and positive results every time with a simple two pass operation for broadcast NAB audio cartridges.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$119.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## FIDELIPAC

If you need blank tape fast and are worried about recorder erase head wear, then worry no more. With the easy to handle "**BLANK-IT**" eraser from FIDELIPAC, you'll save time - no need to run the tape through your recorder. You'll save money - it allows instant reuse of the erased tape without worry about program residue or those mind destroying "whomps". "BLANK-IT" is hand-held for rapid, accurate tape erasing in any setting.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$65.00**



## BROADCAST ELECTRONICS

The **BROADCAST ELECTRONICS TW-120T** cartridge winder with timer is a rugged, dependable and field tested tape cart winder which fills a need in every station using cartridge equipment. It's no longer necessary to limit your cartridge operation by using only stock sizes or to tie up your conventional tape equipment to load tape cartridges. Worn tape in old tape cartridges is easily replaced to any length you desire.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$475.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## TAPECASTER

The **TAPECASTER X-100** features "state-of-the-art" technology for the serious broadcaster who has an eye to saving. It has two direct-drive motors and a floating aluminum tape supply disc which holds a 7" reel or 10 1/2" pancake of lubricated tape. The solenoid brake stops the supply disc at the end of the wind. The X-100 has adjustable tension control for the supply disc brake, ramp design tape guides and four gold-contact rotary switches to program the wind to 7.5 ips. The wind time is accurately metered by the light copper and nylon counter wheel.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$550.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## FIDELIPAC

The **Model 400** features a removable guide pin, a scuff resistant top, a power-on indicator and hand rubbed hardwood case. It can erase all audio, video and computer tapes up to 1" wide and it has a thermal protected core that will not burn out.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$120.00**







### ALLIED

The standard in studios and control rooms around the world are the **ALLIED Broadcast Quartz** line of clocks. Where accuracy and visibility are a must the ALLIED line is just what the announcer or engineer ordered. Available in 12" face size.

12" \$24.95.....ALLIED PRICE \$ \_\_\_\_\_  
PRICE ABOVE IS MFR'S SUGGESTED LIST PRICE.

### WWV CLOCK



### MODEL OEM-10

Prices start under \$1000.00

The **Precision Clock/Time Receiver** is ideally suited for applications that require ACCURATE, TRACEABLE, UNATTENDED and/or RELIABLE time.

**ACCURATE TIME:** The **OEM-10** provides precise time automatically. It gives the user accuracy to within 10 milliseconds of the world-wide standard (Coordinated Universal Time), transmitted by the National Bureau of Standards (NBS).

**TRACEABLE TIME:** The product synchronizes with and is traceable to the NBS atomic clock.

**UNATTENDED TIME:** The **OEM-10** eliminates the need to ever set or adjust the clock. The user can just plug it in and forget it. The time out-put automatically includes corrections for daylight-savings and leap year.

**RELIABLE TIME:** In the event of a power failure, the **OEM-10** quickly locks on to the WWV broadcast when power is restored.

The **OEM-10** acquires the NBS time in less than three minutes under favorable radio reception conditions. And, once it has synchronized with the NBS atomic time standard, it needs to receive reasonable signal integrity for only a few minutes per day to remain within 10 milliseconds accuracy. Slave units may be added.

***“Shipping and Handling  
will be added.”***

***Illustrations, descriptions and  
prices are subject to  
change without notice.***

## ESE

The **ES-302AE** is a four digit, 100 minute timer with six controls: count up, count down, stop, minutes advance, seconds advance and reset. Minutes and seconds can be advanced simultaneously or independently in order to preset for a specified countdown. With the ES-302AE, the user can preset times much faster because lever wheel type switches are used for the preset feature. The ES-302AE can drive 80 series and 90 series slaves. Options prices available upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$350.00**


**ALLIED PRICE \$ \_\_\_\_\_**



The **ES-112E** is a solid-state 12 hour CMOS, six digit clock. It features three simple controls: fast advance, slow advance and hold which make setting to the precise second easy. The display is a bright orange, gas-discharge, seven segment, .55" high digital. An optional CMOS compatible BCD output can drive two .55" slaves or two 80 series slaves or one 90 series slave. Options prices are available upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$191.00**

**ALLIED PRICE \$ \_\_\_\_\_**

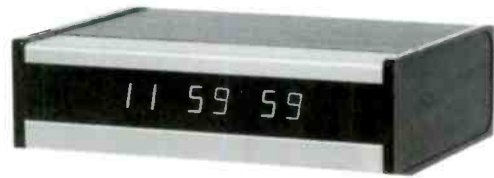

The **ES-510E** is a four digit, 60 minute timer with start, stop and reset controls. Runs continuously unless stopped or reset. If stopped, display will hold time reading and when restarted will continue with next count from last displayed figure. Reset returns display to all zeros. Can reset while running or stopped. If reset while running, timer will continue to run. ES-510E can drive two 80 series or one 90 series slave. Displays are .55" bright orange gas-discharge digital. Remote ready. Options prices are available upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$174.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **ES-562E** is a combination six-digit clock and 12 hour timer with memory, allowing the user to set the clock to the correct time of day, switch to timer mode, then by pushing one button switch back to time of day. The time of day will be correctly displayed in hours, minutes and seconds. The controls on the ES-562E may be remoted. Options prices are available upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$362.00**

**ALLIED PRICE \$ \_\_\_\_\_**




The **ES-172** is a console mount clock/timer in compact enclosure, with bright easy to read six digit .4" red LED's. The controls consist of three settings: Fast Advance, Slow Advance, and Hold. The unit has access to control inputs on rear mounted connector and is entirely enclosed in a high impact black plastic case. Option prices are available upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$183.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## BROADCAST AUDIO

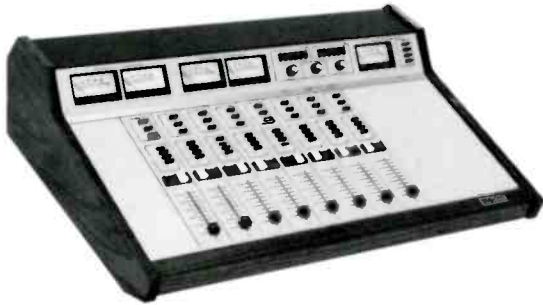

**System 8-IV** is an expandable, completely modular broadcast mixer, with unprecedented features and performance. It was designed exclusively for broadcast and performs flawlessly even in high RF environments. This mixer sets on top of the desk, so it's easy to install, with all connections made from the top. Two stereo and one mono output. Accessory and module prices on request.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$7750.00**  
**Includes 6 modules**

**ALLIED PRICE \$** \_\_\_\_\_



**System 12-IV** is a model of engineering simplicity, using motherboard construction with only two types of amplifier modules and a plug-in interconnecting harness. Two independent industrial grade power supplies are rack mounted in a common housing with front AC and DC status indicators. The power supply is short-circuit proof and an optional redundant supply is available. Operator conveniences include 4 inch log taper slide faders. Three stereo and one mono output. Accessory and module prices upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE....\$10,250.00**  
**with 8 modules**

**ALLIED PRICE \$** \_\_\_\_\_



**System 6** is a modular audio console, utilizing the same electronic modules as the larger SERIES IV consoles. The concept is to offer a premium quality console for newsrooms and production, which is totally compatible with the other Broadcast Audio consoles. Monitor and Cue muting is standard. Extra on/off contacts are provided for remote control, or an optional relay board is available. System 6 is also available as a low-cost console extender, without the output amplifiers, meters and monitor controls.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$4,550.00**

**ALLIED PRICE \$** \_\_\_\_\_



**System 16-IV** features DC audio switching, using LCR's for completely quiet audio control. This enables each mixing channel to be turned on and off from a remote location. Ten plug-in relays, with switch selection of maintained or momentary contacts, can be used for muting or remote start from any combination of mixers. Operator conveniences include 4" log taper slide faders for extremely accurate tracking between channels. Three stereo and one mono output. Accessory and module prices upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE....\$11,350.00**  
**with 8 modules**

**ALLIED PRICE \$** \_\_\_\_\_



**System 20** has options that enable you to virtually design your own audio console for on-air use or production. Three plug-in mixers are available. Each mixer has a transformer balanced mic input and a differential balanced line level input. Motherboards and mixers are all double-sided with extensive ground planes for optimum noise and crosstalk, plus RFI rejection. All integrated circuits have sockets and are brand name off-the-shelf devices. Three stereo and one mono output. Accessory and module prices upon request.

**MANUFACTURER'S SUGGESTED LIST PRICE....\$25,345.00**  
**with 18 modules**

**ALLIED PRICE \$** \_\_\_\_\_



**BROADCAST ELECTRONICS**

The **4S50A** and **4S50AR** consoles accommodate 12 stereo input sources. Features high/low input sensitivity selection, has cue switches on all mixers and individual monitor, cue and headphone amplifiers. R series for rack mounting.

**4S50A** stereo, 4 mixer.....\$2095.00...ALLIED PRICE \$ \_\_\_\_\_

**4S50AR** stereo, 4 mixer.....\$2150.00..ALLIED PRICE \$ \_\_\_\_\_

**4M50A** mono, 4 mixer.....\$1095.00...ALLIED PRICE \$ \_\_\_\_\_

**4M50AR** mono, 4 mixer.....\$1150.00..ALLIED PRICE \$ \_\_\_\_\_



4S50A


The **5S150A**, **5M150A**, **8S150A** and **8M150A** consoles feature sealed pots, 3600 series electronics and contact free FET bus selection. Each mixing channel accommodates two pushbutton selected inputs and may be preset for mic or line level input.

**5S150A** stereo, 5 mixer.....\$2950.00..ALLIED PRICE \$ \_\_\_\_\_


**5M150A** mono, 5 mixer.....\$2395.00..ALLIED PRICE \$ \_\_\_\_\_

**8S150A** stereo, 8 mixer.....\$3650.00..ALLIED PRICE \$ \_\_\_\_\_

**8M150A** mono, 8 mixer.....\$2895.00..ALLIED PRICE \$ \_\_\_\_\_

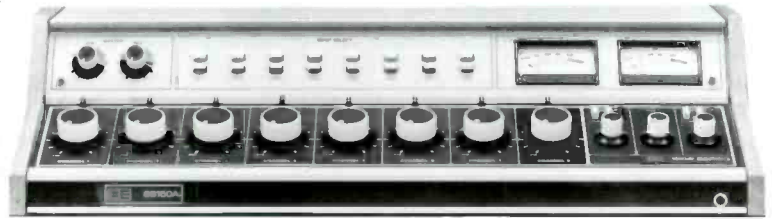

5S150A

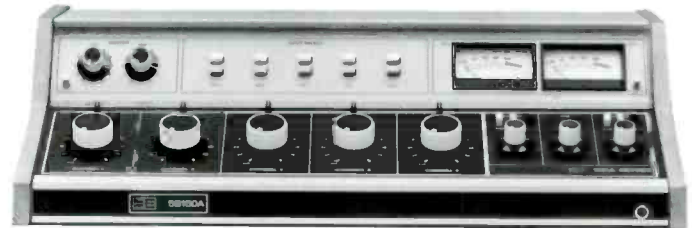

8S150A

The **5S250A**, **5M250A**, **8S250A**, **8M250A**, **10S250A**, **10S350A**, and **10M250A** consoles feature ladder-type step attenuators with cue bus switching, telephone type channel keys and contact-free FET bus selection. Field proven 3600 plug-in electronics make this a truly outstanding line of consoles for any broadcast application.

**5S250A** stereo, 5 mixer.....\$3650.00..ALLIED PRICE \$ \_\_\_\_\_

**5M250A** mono, 5 mixer.....\$2795.00..ALLIED PRICE \$ \_\_\_\_\_

**8S250A** stereo, 8 mixer.....\$4750.00..ALLIED PRICE \$ \_\_\_\_\_

**8M250A** mono, 8 mixer.....\$3695.00..ALLIED PRICE \$ \_\_\_\_\_

**10S250A** stereo, 10 mixer...\$5895.00...ALLIED PRICE \$ \_\_\_\_\_


**10M250A** mono, 10 mixer...\$4795.00...ALLIED PRICE \$ \_\_\_\_\_

**10S350A** stereo, 10 mixer...\$5895.00..ALLIED PRICE \$ \_\_\_\_\_

**10M350A** mono, 10 mixer...\$4795.00..ALLIED PRICE \$ \_\_\_\_\_




10S250A

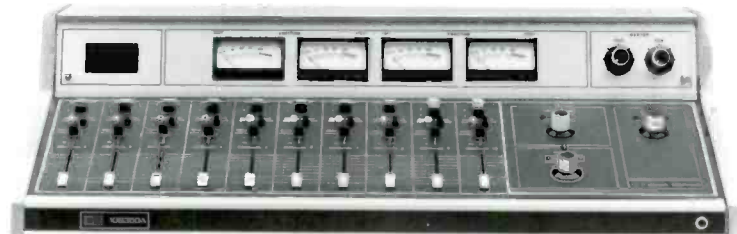

10S350A

**BROADCAST ELECTRONICS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

**“Prices are subject to change without notice”**

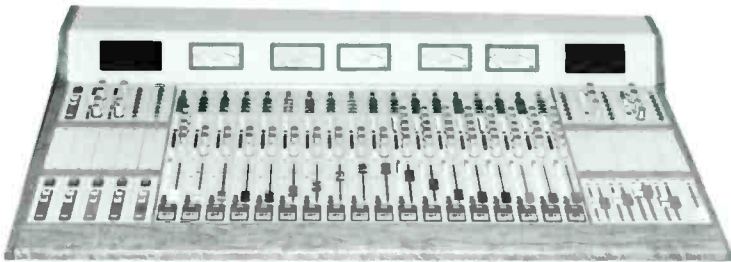


## ARRAKIS

The **Arrakis 10,000 Series Console** is a total broadcast product that provides complete "ON-AIR" and uncompromising 'PRODUCTION' capability within the same console. To further increase its capabilities, the 10,000 supports fifteen option modules within the mainframe proper. A wide variety of turrets and rack cabinets for these option modules provide a total system support capability. With over fifty option modules available from amplifiers to processing to switchers to monitors to motion controls, the 10,000 is the most heavily supported console line in the world today.

As is necessary in any console in this class, the 10,000 is totally transparent to audio. Unlike many other consoles, the 10,000 does not use transformers. For this reason, the performance is dramatically better. In sound tests even on radio receivers where noise dominates the test, it has been shown that active balanced electronics such as is used in the 10,000 is dramatically cleaner than transformer electronics. Typical distortion levels through the 10,000 are .01%.

While appearance is obviously a personal opinion, the clean lines and earthtone colors with matching hand rubbed solid oak trim make the 10,000 a true classic and focal point for your studio. Judge for yourself!

**CALL FOR THE ALLIED PRICE**

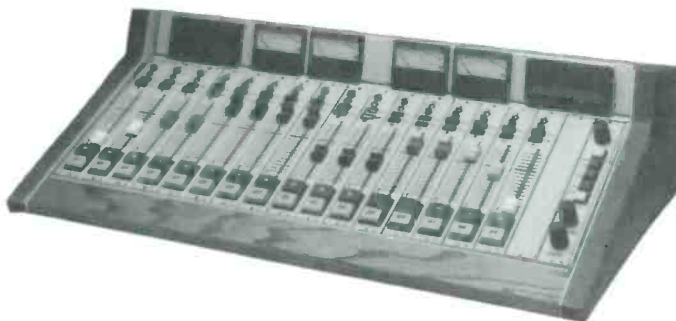

The new **Arrakis 5000 Series Console** is the first, full featured, modular console for under \$10,000. The mainframe features 16 channels plus a channel for accessory modules and the standard Control Room Monitor module.

Features include:

16 modular stereo channels, Telephone mix-minus, Full monitoring facilities, Remote equipment start/stop, Standard digital clock & timer, Superb audio performance specs., Penny & Giles slide faders — and much more!

**PRICES DEPEND UPON MODULE CONTENT — PLEASE CALL**

**ALLIED CARRIES THE ENTIRE  
ARRAKIS LINE. CALL TODAY.**

**THE BROADCAST INDUSTRY'S SOURCE FOR  
STATE-OF-THE-ART EQUIPMENT IS ALLIED**



## ARRAKIS

The **150SC** is designed for use in small studio or portable applications. Utilizes Allen-Bradley mod pots, VCA audio control, ITT "Schadow" switches, Electrovert self crimping input and output connectors, active balanced circuitry inputs and outputs.

- 150SC 6M mono, active in/out.....\$1895.00**  
ALLIED PRICE \$ \_\_\_\_\_
- 150SC 6S stereo, active in/out.....\$1995.00**  
ALLIED PRICE \$ \_\_\_\_\_
- 250SC 6-channel, mono or stereo.....\$2495.00**  
ALLIED PRICE \$ \_\_\_\_\_

The **500SC** is a rugged and versatile console designed for broadcast applications. Utilizes Allen-Bradley mod pots, VCA audio control, ITT "Schadow" switches, Electrovert screw terminal strip input and output connectors and active balanced circuitry inputs and outputs.

- 500SC 8M mono, active in/out.....\$2999.00**  
ALLIED PRICE \$ \_\_\_\_\_
- 500SC 8S stereo, active in/out.....\$2999.00**  
ALLIED PRICE \$ \_\_\_\_\_

The **600SC** deluxe console is engineered to combine the ultimate in mechanical reliability with the remarkable sound and performance of today's high-tech consoles. It features custom Allen-Bradley rotary faders and ITT Schadow switches. The remarkable electronic performance of the 600 is achieved through the use of VCA technology and DC control. There is no audio on the pots or switches. 50 million operation reed relays perform the channel on/off functions.

- 600SC Mono.....\$4299.00** ALLIED PRICE \$ \_\_\_\_\_
- 600SC Stereo.....\$4399.00** ALLIED PRICE \$ \_\_\_\_\_





Designed for ease of operation, uncompromising performance and durability, is the **2000SC** console. Each of the 12 channels features a single input per channel. Two remote select switches bring in an additional 14 inputs. Cue is accomplished by a detent on the Penny & Giles fader while lighted momentary reed relay switches actuate the program and audition busses which are simultaneously monitored with VU meters. Rugged aluminum and wood construction, with reliable motherboard electronics.

- 2000SC 12M mono, active in/out.....\$4495.00**  
ALLIED PRICE \$ \_\_\_\_\_
- 2000SC 12S stereo, active in/out.....\$4695.00**  
ALLIED PRICE \$ \_\_\_\_\_


The **2100SC** has few peers in professional broadcasting. Each of the 12 channels features a dual input per channel. Two remote select switches bring in an additional 14 inputs. The 2100SC features the Signetics NE5532 Op Amp. The only audio switches in the audio path are reed relays which produce no audio degradation at all. It is constructed of heavy hardened aluminum panels complemented by solid oak end pieces and armrest. The 2100SC uses the Penny and Giles 3000 Series slide faders. All front panel switches are Schadow by ITT. Model 1500SC, 8 channel also available.

- 2100SC 12M Mono...\$5495.00** ALLIED PRICE \$ \_\_\_\_\_
- 2100SC 12S Stereo...\$5695.00** ALLIED PRICE \$ \_\_\_\_\_
- 1500SC Mono.....\$3995.00** ALLIED PRICE \$ \_\_\_\_\_
- 1500SC Stereo.....\$3995.00** ALLIED PRICE \$ \_\_\_\_\_

**ARRAKIS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

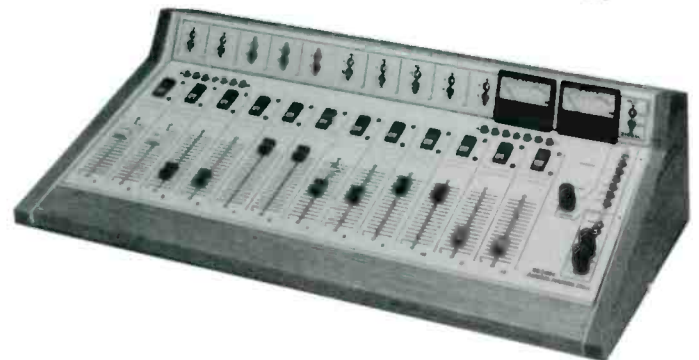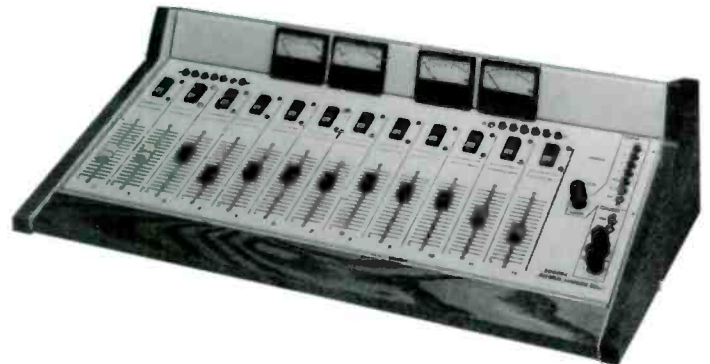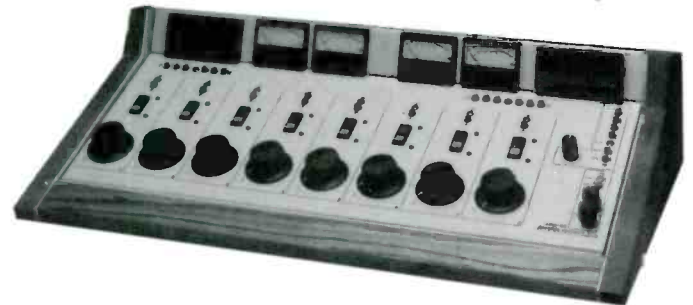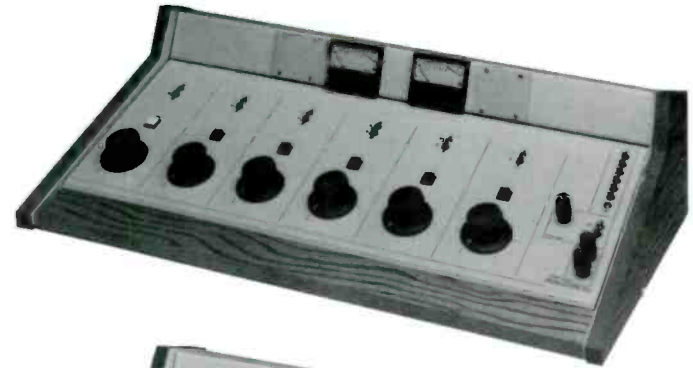




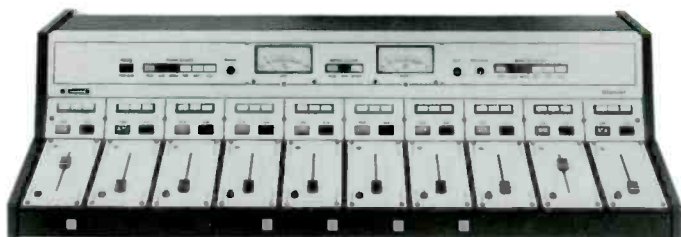

## HARRIS

The **Harris Medalist 8, 10 or 12** channel dual stereo consoles are designed for easy on-air use with color-coded switching; wide attenuator spacing, and a choice of linear or rotary faders. Designed to give the broadcaster input/output flexibility, these consoles are engineered for superb audio performance with excellent RFI/EMI immunity and signal to noise performance and low THD and IMD.


**PRICES UPON APPLICATION**

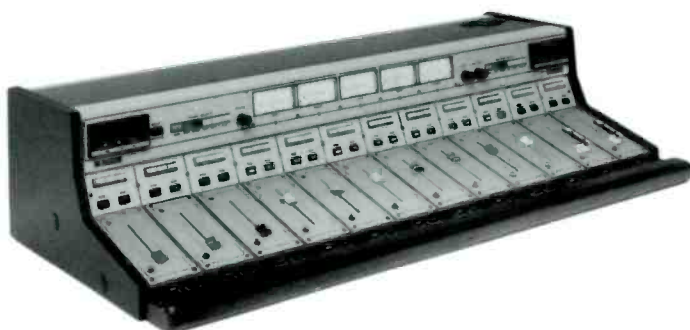

The **Harris Gold Medalist™** provides top-of-the-line audio console features normally found only on consoles at twice the price. Easy on-air use is provided with remote source start/stop switching; EOM-controlled channel-off switching, visual color-coded flag indicator switches for PRM and AUD, LED-illuminated Hall effect switches for ON and OFF, and a choice of linear or rotary faders. The 36 standard inputs are expandable to 72 and other features give input/output flexibility. Top audio performance is ensured with excellent RFI/EMI immunity.

**PRICES UPON APPLICATION**

## RUSSCO

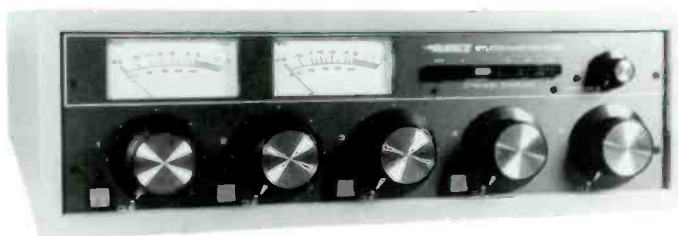

The **RUSSCO** line of consoles packs a terrific value into a compact size at an unheard of bargain price. Designed for broadcast studio use, this terrific five channel mixing console is as modern as tomorrow, with sophisticated features and fully integrated circuitry for dependability. They're engineered for easy operation and simple servicing and they're as good looking as they are good working.

**505 Mono, built in monitor amp.....\$1616.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

**505S Stereo, without monitor amp.....\$2365.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

**RUSSCO PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

## TOA



The **RXA-212** is a powered mixing console with 12 inputs; the **RXA-216** is powered with 16 inputs; 2 program outputs, 2 foldback outputs, and 1 echo output. Each input channel and line output has a balanced, low impedance, transformer-isolated, XLR connector, and an unbalanced 1/4" jack. An input level switch and trim control on each input channel is provided. A four-band equalizer is included on each input channel. A peak indicator LED on each input detects excessive inputs and helps avoid clipping. All faders are long-linear type with 60mm of travel. Additional stereo inputs are used to connect a stereo playback deck, disc player and other auxiliary equipment.

**CALL TODAY FOR THE ALLIED PRICE.**

**AUTOGRAM**

**AUTOGRAM AC** and **IC** consoles are built in only one series. A premium-grade series which features ladder-type attenuators, engraved numbers and letters, 1/4" front panel, and fully balanced and floating inputs and outputs. They're flexible, functional and "bullet proof"!

|   |                  |
|---|------------------|
| <b>AC-6 typical stereo</b> .....            | <b>\$5495.00</b> |
| <b>AC-6 typical mono</b> .....              | <b>\$4844.00</b> |
| <b>AC-8 typical stereo</b> .....            | <b>\$6830.00</b> |
| <b>AC-8 typical mono</b> .....              | <b>\$6873.00</b> |
| <b>IC-10 typical stereo</b> .....           | <b>\$8986.00</b> |
| <b>IC-10 typical mono</b> .....             | <b>\$8141.00</b> |
| <b>LC-10 Penny &amp; Giles Stereo</b> ..... | <b>\$9404.00</b> |
| <b>LC-10 Penny &amp; Giles Mono</b> .....   | <b>\$8556.00</b> |



**CALL FOR THE ALLIED PRICE**

**AUTOGRAM PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

**AUTOGRAM'S "Microgram"** microprocessor controlled audio console is a powerful addition for any broadcast control room. It's built to handle board functions with ease while signalling and mixing numerous prescheduled events simultaneously. The Microgram console can handle 3 stereo buses simultaneously, or run two completely separated automation systems on AM and FM.

**PRICES ON APPLICATION**



The **R/TV-20** Stereo Audio Console is one of the latest innovations from Autogram with features such as:

18 Dedicated pots, 2 Pots with 8 inputs each, Electronic switching, No audio transformers, Penny and Giles linear conductive plastic pots, Schadow selector switches, Pluggable miniature terminal strips, Up to eight patchable microphone preamplifiers, Each channel remotely controllable, Easy input level selection.

**MANUFACTURER'S SUGGESTED LIST PRICE....\$12,620.00**

**12-channel version model R/TV-12.....\$10,564.00**

**ALLIED PRICE \$ \_\_\_\_\_**

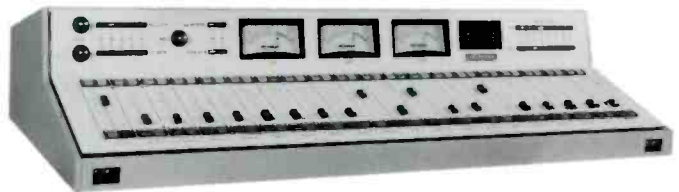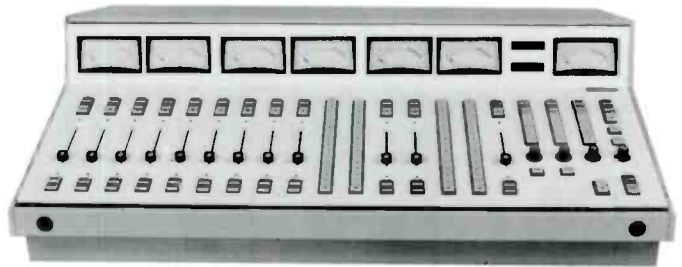



**STATIONMASTER**

The **STATIONMASTER** dual stereo air console series encompasses 4 models (6, 8, 12 and 16 input mainframes) offering quality, performance, dependability, premium state-of-the-art technology. Features: plug-in circuit boards, no internal transformers, any input may be Stereo or Mono, three source selection for each input, DC input switching logic, plus 24 dBm output.


|                                       |                  |
|---------------------------------------|------------------|
| <b>1006, 6 input mainframe</b> .....  | <b>\$4895.00</b> |
| <b>1008, 8 input mainframe</b> .....  | <b>\$5695.00</b> |
| <b>1010, 10 input mainframe</b> ..... | <b>\$6845.00</b> |
| <b>1012, 12 input mainframe</b> ..... | <b>\$7995.00</b> |

**ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR THE ALLIED PRICE.**

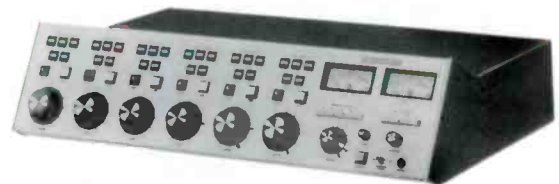

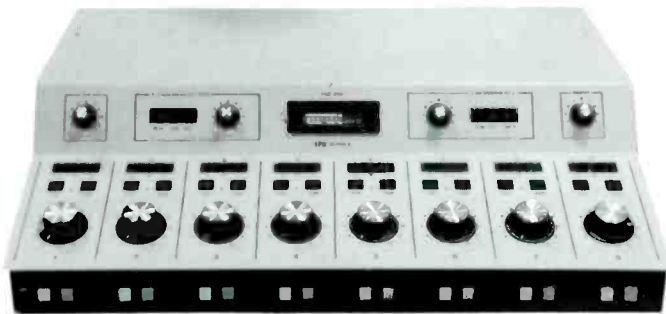

**“Discounts are available  
on most equipment”**

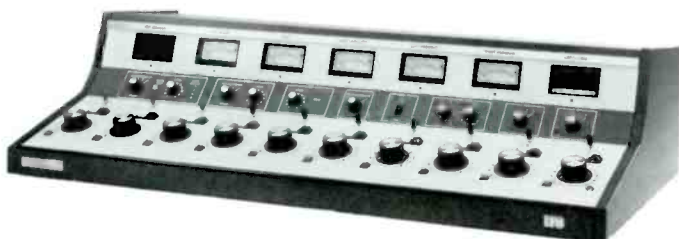

## LPB

The new **LPB Alpha Series** broadcast audio consoles are designed to be cost effective, yet completely “state-of-the-art.” VCA level control and DC solid-state switching keep the audio signal path short to virtually eliminate signal degradation through the console. Three inputs per mixer, user-programmable monitor and cue muting, transformerless design (output transformers optional), mono mixdown output, built-in 8-watt per channel monitor amplifier, headphone and monitor switching, +8dBm/600 ohm auxiliary outputs, all input plug-ins capable of mic or line level, screw barrier terminal input and output connections, long-life pushbuttons, LED status indicators, fluorescent level meters, 15dB output headroom above +8dBm, momentary remote start push-buttons, tally contacts and ease of studio interconnection all add up to make these stereo consoles a superior value.

**ALPHA 8 channel stereo.....\$3995.00 ALLIED PRICE \$ \_\_\_\_\_**

**LPB PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

The **LPB SIGNATURE III** Series consoles are a significant update of prior models, and include 6, 8, 10 and 12 mixer duals, both mono and stereo. All are identical functioning full duals, i.e., the only difference between any two stereo (or mono) consoles is the number of mixers (and associated inputs).

**S-11 6 mixer dual mono.....\$2895.00 ALLIED PRICE \$ \_\_\_\_\_**

**S-10 6 mixer dual stereo.....\$3595.00 ALLIED PRICE \$ \_\_\_\_\_**

**S-15 8 mixer dual mono.....\$4195.00 ALLIED PRICE \$ \_\_\_\_\_**

**S-13 8 mixer dual stereo.....\$4995.00 ALLIED PRICE \$ \_\_\_\_\_**

**S-21 10 mixer dual mono.....\$4795.00 ALLIED PRICE \$ \_\_\_\_\_**

**S-20 10 mixer dual stereo.....\$5895.00 ALLIED PRICE \$ \_\_\_\_\_**

**S-24 12 mixer dual stereo.....\$6695.00 ALLIED PRICE \$ \_\_\_\_\_**

The **LPB CITATION** consoles come in only stereo and in only two configurations, 8 channel and 10 channel. The series features transformer balanced inputs and outputs, with three inputs per mixer, program, audition, mono mixdown, monitor, cue, headphone and tape outputs. The CITATION console features a signal to noise ratio of better than 74 dB below +18 dBm output “referenced to” -50 dBm input 20 Hz to 20 kHz.

**C-8S 8 channel dual stereo.....\$8495.00 ALLIED PRICE \$ \_\_\_\_\_**

**C-8SL 8 channel dual stereo.....\$9195.00 ALLIED PRICE \$ \_\_\_\_\_**

**C-10S 10 channel dual stereo.....\$8995.00 ALLIED PRICE \$ \_\_\_\_\_**

**C-10SL 10 channel dual stereo.....\$9995.00 ALLIED PRICE \$ \_\_\_\_\_**

**Accessory and spares prices upon request.  
LPB PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**



**AUDITRONICS**

The **200 Series** on-air broadcast control console represents the culmination of latest technology applied for broadcast use. The design is based on information gathered during extensive research conducted throughout the broadcast industry and the expertise of Auditronics' 15-year history in this business. The 200 series offers a high degree of reliability together with simplicity of use in a compact, operator oriented package.

*Typical pricing with typical input modules.*

**206MF typical 6 input mainframe.....\$9675.00**  
ALLIED PRICE \$ \_\_\_\_\_

**212MF typical 12 input mainframe.....\$14,240.00**  
ALLIED PRICE \$ \_\_\_\_\_

**218MF typical 18 input mainframe.....\$19,555.00**  
ALLIED PRICE \$ \_\_\_\_\_

**224MF typical 24 input mainframe.....\$24,625.00**  
ALLIED PRICE \$ \_\_\_\_\_

*Module pricing upon request.*

**AUDITRONICS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**


The **300 Series** Audio Production Console is a totally new concept in audio processing and control. Designed as a building-block system to satisfy the requirements of both small and large facilities, the 300 Series is easily expandable in capabilities, at no sacrifice of initial performance specifications.


- 4 or 8 Outputs
- Output Submastering
- Mix-Minus Capability
- Mono and/or Stereo Inputs
- Mix Output
- 4 Auxiliary Sends
- Auxiliary Returns
- Control Room Monitoring
- Stereo Solo System
- Aural Phase Check Capability
- Stereo Headphone Monitoring
- Output Metering
- Mic Phantom Power Supply
- Built-In Monitor Mixer

The **400 Series** of consoles is designed to utilize a common basic mainframe which may be configured for either production or on-air use by proper selection of plug-in modules. An important feature of the 400 system design is that any 4 output group mainframe may be field upgraded, by the user, to an 8 output system at minimum cost. All standard modules are designed to support the 8 bus system.

Standard sizes are offered for 12, 18 and 24 input positions. Mainframes are designed for drop-in flush mount into a desk top cut-out. Each model mainframe has a recessed trough with removable plate so the user may install custom switching to meet specific requirements. Standard output metering will be LED bar graph having VU and PEAK ballistics. Analog VU meters will be offered as an option on some models.

**PRICES UPON APPLICATION**

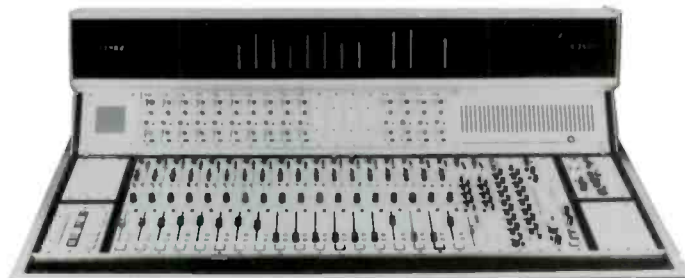

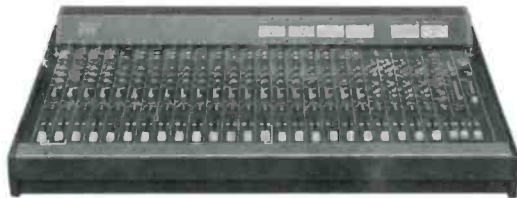

**TASCAM**

The **TASCAM 200 Series** mixers were designed to handle all of these tough assignments conveniently and dependably — such as sound reinforcement, studio recording and broadcast and video production/post production. Each channel is built on its own circuit card for better isolation. They are mounted on a steel chassis for optimum strength and security, and are built to accept inputs from any source. A generous power supply affords ample headroom for full dynamics and low distortion.

**M-208, 8 channel mixer.....\$1149.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**M-216, 16 channel mixer.....\$1749.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**TASCAM PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES.**


TASCAM designed the **300 Series** to meet the demands of both studio recording and live sound mixing. A sophisticated signal routing system takes care of the most complex foldback, effects mixing, subgrouping and monitoring requirements. These consoles deliver clean, dynamic sound due to transformerless balanced differential input design.

**M-308B, 8 channel mixer.....\$1995.00**

**M-312B, 12 channel mixer.....\$2995.00**

**M-320B, 20 channel mixer.....\$3995.00**

**ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR THE ALLIED PRICE!**

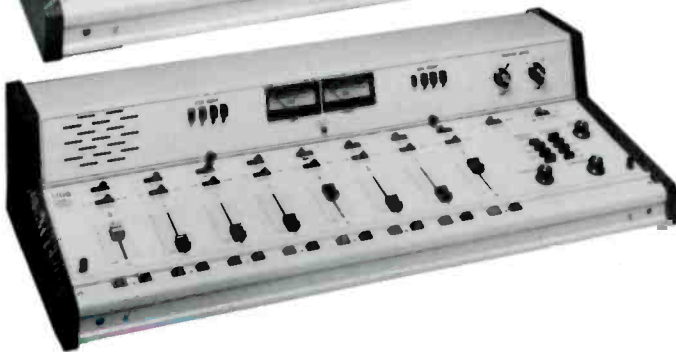

**UREI**

The **UREI 1650 and 1680 Series** broadcast consoles have the features most requested by engineers and consultants, priced within the budget of small market stations and built with UREI quality. The new consoles offer a choice of five or eight mixers and a choice of attenuator types: rotary conductive plastic, Shallco precision rotary or Penny and Giles straight line. Provisions are for customization to fit the individual station needs, but no accessories are required to put them on the air as they are shipped.

**1651 5 mixer, conductive.....\$2896.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**1652 5 mixer, Shallco.....\$3596.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**1653 5 mixer, Penny & Giles.....\$3896.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**1681 8 mixer, conductive.....\$3596.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**1682 8 mixer, Shallco.....\$4796.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**1683 8 mixer, Penny & Giles.....\$5196.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**ELECTRO VOICE**



The **ELECTRO VOICE C-12 SERIES TWO** console is a compact, high performance 12 in/4 subgroup/stereo and mono output mixer designed for musical, speed, theatrical sound reinforcement, and recording applications. A new balanced output option uses highest quality transformers and circuitry with XLR connectors on all 10 outputs (Mono, L/R Stereo, 4 Subgroups, Monitor, Aux, and Hi Effects Sends) for lowest noise and distortion. These may be used either singly, or in any combination with the normally provided unbalanced (1/4" phone) outs.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$3855.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## SHURE

The **M-67** is a transistorized microphone mixer/remote amplifier specifically designed for professional applications. The excellent performance and versatility of this complete, compact console make it an ideal choice for studio, remote, or original sound reinforcement use, and as an "add-on" mixer for expanding existing facilities. It is also ideally suited for use with tape recorders and VTR's to provide multiple microphone inputs.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$520.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **SHURE Model M-267** is a professional microphone mixer/remote amplifier. The excellent performance, versatility and features of this complete, compact console make it suitable for studio, remote, or sound reinforcement use, and as an add-on mixer for expanding existing facilities. It is also ideally suited for use with audio and video tape recorders to provide multiple microphone inputs.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$520.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **Model FP-31** is a compact, portable microphone mixer specially designed for electronic news gathering (ENG) and electronic field production (EFP) use including film, video and remote broadcast applications. The FP-31 provides a wide, flat frequency response, low distortion, and up to +18 dBm output. The unit features extremely low internal noise and switchable low-cut filters for each input that effectively rejects low-frequency handling and wind noise. 400 Hz slate tone, 1 kHz cue tone.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$990.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **FP-32 Stereo Field Production Mixer** features two transformer-isolated outputs and three transformer-isolated input channels, each of which includes a level control, center-detented stereo pan pot, and a switch permitting microphone or line-level operation. The mixer's stereo capability is further enhanced by a concentric clutched stereo master gain control. The model FP-32 mixer also includes a built-in slate microphone with automatic gain control and a slate tone for identifying take. Field users will appreciate the built-in slate microphone, tone oscillator, and phantom (simplex) and A-B(T) power for condenser microphones. There's much more in this extremely compact package.

**MANUFACTURED SUGGESTED LIST PRICE.....\$1350.00**

**CALL FOR DETAILS AND THE ALLIED PRICE.**



## AUDIO-TECNICA

The **AT4462** is a true stereo portable mixer featuring low noise and low distortion for remote broadcast and field production. The AT 4462 has two monaural inputs which may be panned left or right, and two standard stereo inputs. All inputs and the two 600 ohm outputs are transformer coupled at microphone or line level. Pre-fader "cue" is provided for each input. A unique MODU-COMM circuit allows program audio or any external source to be delivered as a monitor feed to the talent over conventional microphone cables connected to input channels 1 and 2, with no interference.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1295.00**

**ALLIED PRICE \$ \_\_\_\_\_**







## ELECTRO VOICE

The **Electro-Voice ELX-1** Microphone Mixer packs the features you've asked for in a "friendly" format that's easy to use. In the studio or on the scene, the ELX-1 delivers the same exceptional performance, with versatility and dependability. You can RACK IT . . . PACK IT . . . STACK IT! Has built in battery power rack with LED to indicate AC or DC power. Also has calibrated RPM LED bargraph. Many, many more exciting features.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$567.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## GENTNER

The **Microtel MT-1** is an ultra light, battery-operated mixing console for use in a variety of applications.

It consists of a small box with an input for a microphone, a mini-jack input for another source such as a cassette deck, a jack for a headset, a mini-jack for direct output to a tape recorder or similar device and a modular jack for direction connection to the telephone line.

Totally modular in design, uses two 9 volt batteries (not included), measures 2 1/2" wide by 5" long by 2 1/2" high and weighs less than 1 lb.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$219.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## TELFAX

From **TELFAX**, manufacturers of the most widely used miniature phone remote units comes a new unit for the professional broadcaster, the TFX-131B. Features include switchable tone or pulse dialing, built-in rechargeable Ni-Cad battery pack, LCD clock/stopwatch with alarm function, closed circuit spotter channel, modular phone connectors and much more.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$850.00**

**ALLIED PRICE \$ \_\_\_\_\_**



This is the new standard in remote broadcasting, the Telfax **TFX-31C** phone remote unit. It is the smallest, lightest and most feature-packed unit on the market. Just connect it to the phone line, plug in your headset and you're ready to broadcast with superior audio quality. Compare size, features and price carefully, the Telfax TFX-31C is the only wise choice.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$695.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## ZERCOM



**MAX-Z** is a remote broadcast console that provides MAXimum flexibility, utility, and above all, audio quality. When it comes to convenience features that help make a remote broadcast run smoothly and sound professional the MAX-Z has no equal. A short list of standard features includes . . . carrying case, built in rechargeable batteries and charger, clock stopwatch/timer, V.U. meter, WIDE RANGE AUDIO INPUTS (will match almost anything), cue channel, phone line alarms, memory dialing (tone or pulse), etc.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1095.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## RUSSCO

Here's the Remote Mixer you've been waiting for! The **STELLAR SERIES TELEMOTE T-321** gives you two low impedance microphone inputs and one medium impedance tape recorder input in a handy-dandy 3 pound package. The **RUSSCO TELEMOTE 321 3 CHANNEL MIXER** makes life easy for you. No batteries or AC plugs to worry about. Just hook up to your phone line and you're on the air!

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$599.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## — DISTRIBUTION AMPS —

## BONNEVILLE

The **DA-106** is a premium-quality general-purpose audio distribution amplifier. It is suitable for multiple line-level feeds of audio or real-time SMPTE time-code signals from a single source.

The unit features a balanced, bridging transformer input complete with static shield and R-F bypassing. Up to 30 dB of gain is adjustable by a front-panel control. The amplifier and power supply modules are easily removable from the front of the unit.

All outputs are transformer-isolated and are fully protected against short-circuits. Outputs are isolated from each other by a minimum of 60 dB across the entire audio bandwidth. Outputs can be strapped for 150 or 600-ohm source impedances. The individually-calibrated VU meter can be set for either +4 or +8 dBm systems. A front-panel headphone jack is provided for aural monitoring. A bi-polar regulated power supply is self-contained. The rectifier/regulator module is removable from the front of the unit. The amplifiers and power supply are designed for continuous sine-wave duty. The distribution system is engineered to interface with a system without introducing ground loops.

The DA-106 offers some of the most enviable features available in audio distribution at the most reasonable pricing in its class.



**DA106 Stereo.....\$1095.00      ALLIED PRICE \$ \_\_\_\_\_**

**DA106 Mono.....\$695.00      ALLIED PRICE \$ \_\_\_\_\_**

The **DA-108** is particularly suited to provide multiple microphone or line-level outputs to reporters and sound cameramen at press conferences. It is also suited for multiple feeds in portable sound reinforcement systems. The DA-108 features XLR connectors in and out, transformer inputs and outputs, a 20K bridging input, up to +24 dBm outputs, selectable line or mic outputs, adjustable gain to +30 dB and a self contained power supply.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$695.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **"Press Corps 2" (PC-2)** audio distribution package combines two DA-108 distribution amplifiers in a rugged carrying case. The two DA's may be bridged from a single input line using the cable supplied, or may be operated independently as separate 1 x 8 units. The carrying case has a detachable front and back cover to completely protect the distribution system during transportation. Transformer isolation on all inputs and outputs protects against AC ground loop current and RFI.




**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1495.00**

**ALLIED PRICE \$ \_\_\_\_\_**




## AUDIOMETRICS

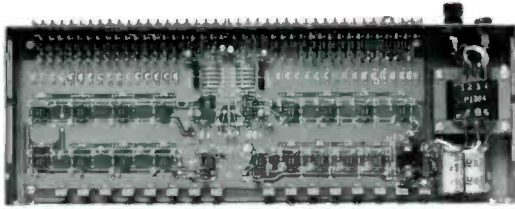

The **AUDIOMETRICS** distribution amplifier combines solid-state electronics and functional flexibility into one small package. A single high quality audio op amp provides balanced output, and individual gain adjustments for each channel. Excellent isolation is provided between outputs. Audio sources can be routed to multiple locations with various level requirements and impedances.

**DA8x2.....\$409.00** **ALLIED PRICE \$** \_\_\_\_\_  
**AUDIOMETRICS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

## TELLABS MODULAR

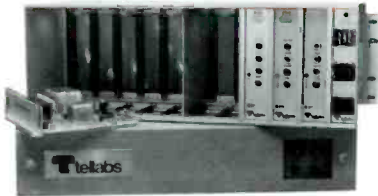

Each **TELLABS 4018** module provides a 1 x 8 distribution amplifier with high impedance bridging or 600 ohms input and 600 ohms each port output. The 1012 housing permits mounting of up to eleven 4018 modules plus a 9021 fuse protection module. Combine this package with a rack-mounted 8003A power supply, and you have up to 11 x 88 distribution amplifier. Cabinets must be wired by user.

**4018 DA module.....\$150.00** **ALLIED PRICE \$** \_\_\_\_\_  
**1012 Housing.....\$100.00** **ALLIED PRICE \$** \_\_\_\_\_  
**8003A Power supply....\$173.00** **ALLIED PRICE \$** \_\_\_\_\_  
**TELLABS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

## BGW



The **BGW 2242** is an ultra high performance, all electronic distribution amplifier, configured as two single input/four output amplifiers in a 1 3/4" high rack mount enclosure. All inputs and outputs are active balanced. Eight miniature bridge connected audio power amplifiers built with discrete transistors for output devices are incorporated. The rugged output stages drive impedances as low as 50 ohms, permitting very long lines using twinax to be handled with ease. The internal power supply features a toroidal power transformer and low noise discrete regulator circuitry.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$799.00**  
**ALLIED PRICE \$** \_\_\_\_\_

## HEACO



The new **5002B** audio distribution amplifier from HEACO offers a 15K ohm transformer balanced input. The frequency response of the amplifier is down less than .25 dB over a frequency range of 20 Hz to 20 kHz. Distortion is less than .25% over the same range. Eighteen 600 ohm balanced outputs are provided that are isolated by greater than 80 dB. The output level, as well as input level, can be monitored by an LED meter allowing the operator to check the operation of the DA as well as accurately set the audio level to the outputs.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$549.50**  
**ALLIED PRICE \$** \_\_\_\_\_



The new dual **5004B** distribution amplifier from HEACO is what can accurately be described as "developed technology" carried to its highest. The 5004B consists of dual, extremely low distortion amplifiers. Each amplifier has a differential, balanced bridging input. The frequency response is less than .25 dB over a frequency range of 20 Hz to 20 kHz. Distortion is less than .25% over the same range. The 5004B offers a choice of 1 x 8 or 2 x 16 operation.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$687.50**  
**ALLIED PRICE \$** \_\_\_\_\_




## AUDITRONICS

Designed to meet the requirements of the modern broadcast facility, the **1100 SERIES** audio distribution amplifier systems from AUDITRONICS include the mainframe, power supply and a 1 x 6 distribution amplifier module. The DA-6/LC module includes one balanced input with internally accessed master gain control and six balanced outputs each module with individual front panel accessible attenuation controls.

- 1100-MFP** 8 input mainframe with integral PS-1100 power supply.....\$895.00
- 1100-MF** 10 input mainframe exclusive of power supply.....\$525.00
- DA-6/LC** 1 input with gain control + 6 outputs with individual attenuation controls.....\$190.00
- PS-60** Rack mount external power supply system.....\$500.00

Prices shown above are based on a system. Individual components will be higher.

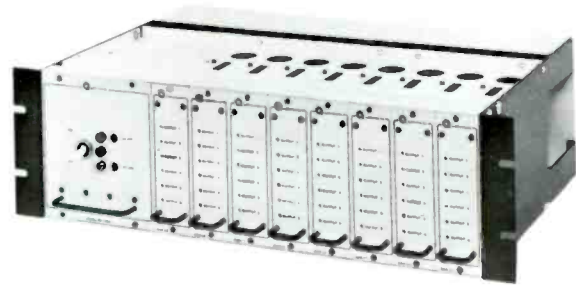

- PSI-60** Rack mount power supply isolator.....\$265.00  
ALLIED PRICE \$ \_\_\_\_\_
- PS-1100** Spare integral power supply for 1100 MFP mainframe.....\$375.00  
ALLIED PRICE \$ \_\_\_\_\_

AUDITRONICS PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.

## — ROUTING SWITCHERS —

### RAMKO

The new **PRIMUS RS-1616** is an audio thru data routing/amplifying system with performance and versatility unmatched by any similar units on the market. In addition to performance that will surpass the requirements of even the most critical studio professional, the user friendly controls provide you with the power to program or control these units, limited only by your imagination. The system can be configured from as little as 8 mono/4 stereo in by 2 out, to as large as 128 mono/64 stereo in by 64.


PRICE ON APPLICATION



### GENTNER

**Gentner Program Switchers** are very useful in applications which require passive switching of signal sources. Internal switching is accomplished by sealed socket-mounted relays that are magnetically latched. Programmable Arrayed Logic (PAL) circuits form the heart of the firmware within the system. The 10x2 Stereo selects ten stereo channel inputs to a single stereo channel output; the 20x1 Mono selects twenty mono channel inputs to a single mono channel output.


PRICE UPON APPLICATION

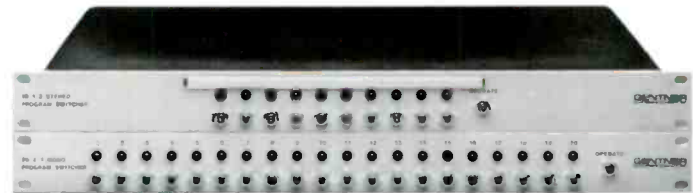


### UTAH SCIENTIFIC

The **AVS-1B Switching System** has been developed for reliable, distortion-free routing of audio, video, tally, time code or machine control signals. Standard configurations are offered in matrix sizes from 10 x 10 to 150 x 160 providing video only, audio only, or audio follow video switching. Redundant cooling fans are employed. Four redundant party lines are provided. A standby control and memory card are available to permit instant replacement of 100% of the shared components.

PRICE UPON APPLICATION

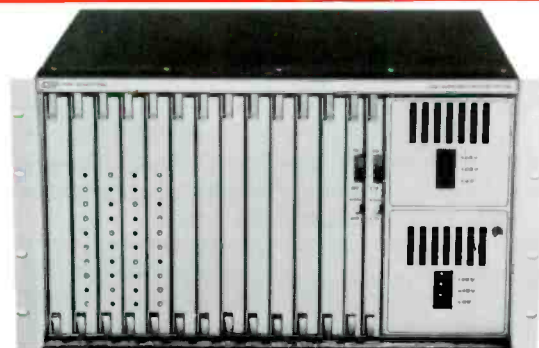

## ARRAKIS

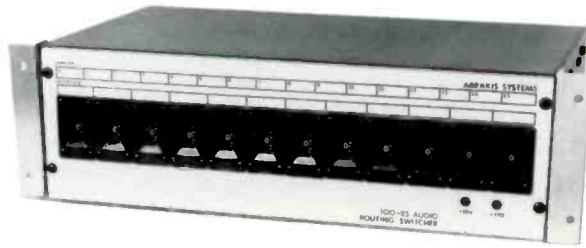

The **RS Audio Routing Switchers** are the professional alternative to patch panels, mechanical switches and distribution amplifiers. Ultra reliable, the power supply is regulated, protected and has a 10 year meantime before failure. LSI integrated circuits reduce parts count to a minimum. All IC's are socketed for ease of replacement. The thumbwheel control switches are 1,000,000 operation. Due to the ultra reliable design redundant power supplies are unnecessary. These switchers may be used in the most critical sections of the audio chain with total confidence.

| Model     | Description                         | ALLIED PRICE \$ |
|-----------|-------------------------------------|-----------------|
| 100RSM    | 16 in by 12 out mono.....\$1500.00  | _____           |
| 1100A-RSS | 16 in by 4 out stereo.....\$995.00  | _____           |
| 1100B-RSS | 16 in by 8 out stereo.....\$1695.00 | _____           |
| 2100A-RSM | 32 in by 4 out mono.....\$1695.00   | _____           |
| 2100B-RSS | 32 in by 8 out stereo.....\$3495.00 | _____           |

## CONEX



The **Conex AS-101** Audio Switcher allows any one of 10 stereo sources to be switched to the stereo output channel. Switching is accomplished by pressing one of the illuminated buttons on the front panel, or remotely, via the remote control connector on the rear panel. Several remote control devices may be connected in parallel, and all will indicate the selected channel.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$895.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **CONEX UM-33 Cue-Amp** is a stereo, eight channel in, one channel out general purpose cue, monitor, and line amplifier.

The Cue-Amp provides the easiest, least expensive, and most compact way of handling a variety of common monitoring, cueing, amplifying, and switching situations in any audio installation.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$495.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## ANNOUNCING . . .

# ALLIED Broadcast Systems

Working closely with Allied's Broadcast, Satellite, Canadian and International Divisions, the Broadcast Systems Division has been established to provide engineering support, close customer contact to carefully assess and define user requirements, liaison with manufacturers and the monitoring of each project from initial contact through the final installation, operator training and field service as options to its Systems customers. "Systems" encompasses various interpretations to people. Allied's definition means we can build, modify or upgrade your current facility with the latest state-of-the-art equipment, blending old/new comperetry, automating or computerizing for specific requirements. Call us today — let us meet your systems needs . . .

**(409) 846-8244**

**BROADCAST DISC STORAGE, LTD**

The **LIFTBOY** method of storage features a unique profile. Selection is made by flipping through CD's title by title, without boxes falling over or becoming scratched. Aluminum construction.

**LIFTBOY** for 22 or 33 compact discs

Width: 22/33:11.97/18.7  
Height: 22/33:0.87/0.87  
Depth: 22/33:7.16/7.16

**Model 22**.....\$32.00  
**Model 33**.....\$39.00




**LIFTBOY**

**LIFTBOY** for 88,110 or 132 Compact Discs

Width: 88/110/132:24.25/30.35/36.45  
Height: 88/110/132:1.85/1.85/1.85  
Depth: 88/110/132:14.05/14.05/14.05

**Model 88**.....\$150.00  
**Model 110**.....\$188.00  
**Model 132**.....\$225.00

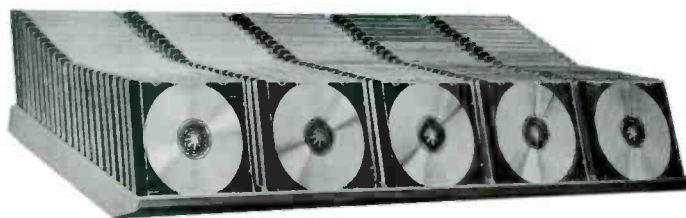


**LIFTBOY**

The **Discit** holds up to 18 CDs per module. The modules stack and interlock for even greater capacity with snap-in features. Polystyrene construction. (Jewel cases only.)

Base: 5.59 x 5.43  
Height: 12.59

**Model DISCIT**.....\$9.75

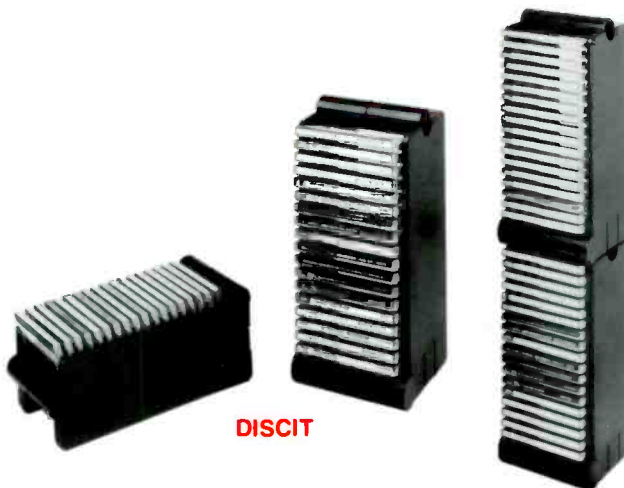


**DISCIT**

The **LIBRARY STORAGE SYSTEM** consists of a heavy steel frame which wraps securely around 35 of the DISCITS as pictured above. With a capacity for 630 compact discs (in their jewel cases), the Library Storage System permits professional storage in the library or control room. Assembly required. 5 extra discits included.

**Model 34000/16000**.....\$595.00


79"H x 41½"W x 7"D

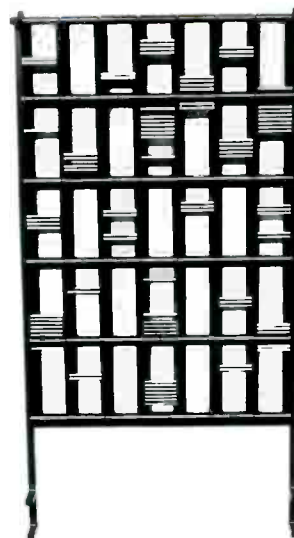

**LIBRARY STORAGE SYSTEM**



**Pop-Outs**

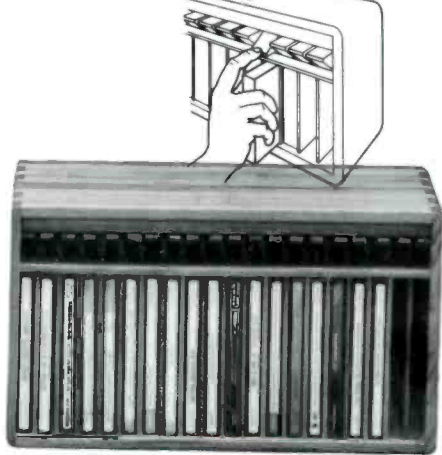


**Model 480**

Touch the key . . . out pops the disc.  
Solid Teak — Holds 20 CDs

**Model 480**.....\$44.95

For the **COMPACT disc**

**Model TCD-30**  
Economical  
Plastic Construction

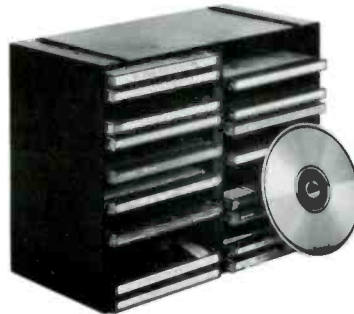

Holds 30 CD Jewel Cases

**Model TCD-30**.....\$6.95


**A-LINE**

**Model CDP-72**  
Solid Teak



Holds  
72 CDs

**Model CDP-48**  
Solid Teak  
Holds 48 CDs



**Model CDP-24**  
Solid Teak  
Holds 24 CDs



**Model CDP-72**.....\$79.95  
**Model CDP-48**.....\$59.95  
**Model CDP-24**.....\$39.95



**Lift Security®**

The ultimate bulk-storage system for your CD library, 960 jewel box capacity. Each drawer locks independently. Heavy gauge steel. Double suspension drawer slides.

\$795.00 ea.

What a great way to pull a whole shift & take 'em to the control room.



**Model 4931**  
Holds 30 CDs  
Solid Teak, Handletop

**Model 493T**.....\$39.95



**Model CDR-100** holds 100 CDs in a 4-rack configuration. Frame made of solid wood.

**Model CDR-100**.....\$110.00



**Model CD-236**

Solid Oak — Holds 36 CDs

**Model CD-236**.....\$34.95

Illustrations,  
descriptions and  
prices are subject  
to change  
without notice.

**Model OCD-30**  
Holds 30 CDs\*



**Model OCD-90**  
Holds 90 CDs\*

**Model OCD-60**  
Holds 60 CDs\*

Solid Oak with Molded Plastic Inserts

**Model OCD-30**.....\$29.95  
**Model OCD-60**.....\$39.95  
**Model OCD-90**.....\$49.95  
(Holds Jewel Cases only.)

**A-LINE CART RACKS**

**STANDARD FREE STANDING**

| Model                                     | Cap. | W x H           |          |
|---|------|-----------------|----------|
| A/L 20                                    | 20   | 24 1/4 x 5 5/8  | \$44.00  |
| A/L 40                                    | 40   | 24 1/4 x 9 7/8  | \$44.00  |
| A/L 50                                    | 50   | 24 1/4 x 12     | \$52.00  |
| A/L 60                                    | 60   | 24 1/4 x 14 1/8 | \$63.00  |
| A/L 100A                                  | 100  | 24 1/4 x 22 5/8 | \$91.00  |
| (Rows 5 wide, 20 high - as picture shows) |      |                 |          |
| A/L 100B                                  | 100  | 47 1/2 x 12     | \$91.00  |
| (Rows 10 wide, 10 high)                   |      |                 |          |
| A/L 150                                   | 150  | 47 1/2 x 17 1/4 | \$139.00 |
| A/L 200                                   | 200  | 47 1/2 x 22 5/8 | \$183.00 |



**N-SERIES**

For audio cartridge storage Allied offers the high-quality, highly flexible **A-LINE** of cart racks. From the standard wall mount to the most exotic lazy susan models, everything is available from Allied. All cart racks are normally supplied with walnut, pecan, gold or black laminate. Special laminates and sizes are available, call or write for prices.

| Model     | Cap. | W x H       |          |
|-----------|------|-------------|----------|
| A/L 100N  | 100  | 10 1/2 x 67 | \$95.00  |
| A/L 150N  | 150  | 15 x 67     | \$139.00 |
| A/L 200N  | 200  | 19 5/8 x 67 | \$183.00 |
| A/L 250N  | 250  | 24 1/4 x 67 | \$238.00 |
| A/L 300N  | 300  | 38 7/8 x 67 | \$279.00 |
| A/L 350N  | 350  | 34 5/8 x 67 | \$329.00 |
| A/L 400N  | 400  | 39 1/4 x 67 | \$370.00 |
| A/L 450N  | 450  | 48 1/2 x 67 | \$421.00 |
| A/L 500N  | 500  | 48 1/2 x 67 | \$470.00 |
| A/L 600N  | 600  | 58 7/8 x 67 | \$532.00 |
| A/L 800N  | 800  | 78 1/2 x 67 | \$700.00 |
| A/L 1000N | 1000 | 97 x 67     | \$915.00 |



Lazy susan cart racks are normally supplied with standard 4" base. However, any size base up to 30" is available. Special size racks are available. Walnut, pecan, gold or black laminate are standard. Call or write for prices on special bases, sizes or laminates.

| Model      | Cap. | W x H           |           |
|------------|------|-----------------|-----------|
| A/L 100LS  | 100  | 10 1/4 x 32 3/8 | \$180.00  |
| A/L 160LS  | 160  | 15 x 27         | \$270.00  |
| A/L 240LS  | 240  | 19 1/2 x 27     | \$314.00  |
| A/L 400LS  | 400  | 24 1/8 x 32 3/8 | \$540.00  |
| A/L 800LS  | 800  | 24 1/8 x 58 7/8 | \$911.00  |
| A/L 1000LS | 1000 | 29 x 58 7/8     | \$1415.00 |
| A/L 1200LS | 1200 | 29 x 69 3/8     | \$1638.00 |





**ALLIED WIRE LAZY SUSAN CART RACKS**

Where strength and capacity are required at a minimal cost, the Allied line of welded, durable wire lazy susan cart racks can fill the need. Available in a choice of 50, 300 or 500 capacity, these industrial quality cart racks will give many years of dependable service.

| Model | Cap | Mfr's List | ALLIED PRICE \$ |
|-------|-----|------------|-----------------|
| 50    | 50  | \$45.46    | \$ _____        |
| 300   | 300 | \$354.23   | \$ _____        |
| 500   | 500 | \$539.08   | \$ _____        |

-Dimensions-

#50 is 4½" W x 6" D x 65¼" L

#300 is 6' High and has a 19" Diameter

#500 is 6' High and has a 21" Diameter

NOTE: "Handle" Ring diameter of #300 is 22" and #500 is 27"

For the broadcaster who has more carts than space, the answer very likely is Allied wire racks.


These high quality, reinforced wire racks give you all the storage space you will need to hold all your program and commercial carts.

**COPPER**

**ALLIED IS A MAJOR SUPPLIER OF COPPER**

**ALLIED** stocks and sells more copper strap than any other broadcast supplier. We also supply copper flyscreen for room or equipment shielding.


Call for current price due to fluctuating market




for RF Management,  
**COPPER STRAP**  
.020 or .032 thickness,  
all widths



for equipment or  
room shielding,  
**COPPER FLYSCREEN**



for tower counterpoise,  
**COPPER GROUNDSCREEN**

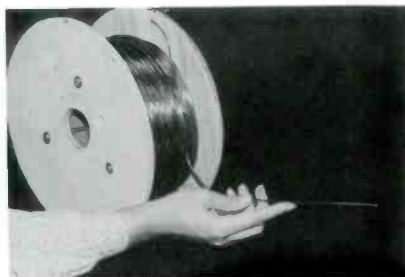

for construction wiring,  
**SOFT #10 COPPER WIRE**



**CALL FOR TODAY'S ALLIED PRICE**



**FIDELIPAC**

The Fidelipac line gives you a choice of styles and sizes.

WR25 Wall mount-25 carts...\$32.00 ALLIED PRICE \$ \_\_\_\_\_


MRB-1 rack base (8-WR25)...\$79.00 ALLIED PRICE \$ \_\_\_\_\_

MR-200 mobile rack holds 200...\$335.00  
ALLIED PRICE \$ \_\_\_\_\_

TR-48 tabletop rack holds 48...\$95.00  
ALLIED PRICE \$ \_\_\_\_\_

TR-96 tabletop rack holds 96...\$170.00  
ALLIED PRICE \$ \_\_\_\_\_

FIDELIPAC PRICES ABOVE ARE MFR'S LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.

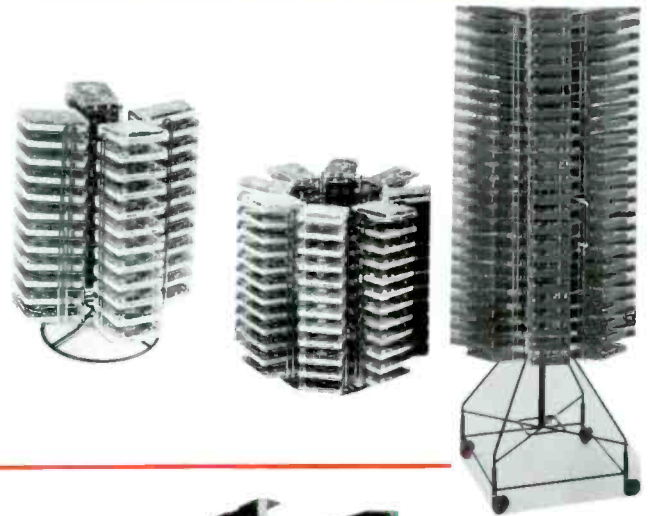

**SIMPAC**

For a cart rack that will mount anywhere and will hold up to 10 carts, the **SIMPAC** line from Allied is just what the engineer ordered. Black only.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$7.00 per module

ALLIED PRICE \$ \_\_\_\_\_




**A-LINE 19" EIA EQUIPMENT RACKS**

| Model    | Panel Ht | Depth | Mfgr's List | ALLIED PRICE \$ |
|----------|----------|-------|-------------|-----------------|
| A/L R100 | 7"       | 17"   | \$85.00     | _____           |
| A/L R100 | 7"       | 23"   | \$89.00     | _____           |
| A/L R101 | 8¾"      | 17"   | \$92.00     | _____           |
| A/L R101 | 8¾"      | 23"   | \$97.00     | _____           |
| A/L R102 | 10½"     | 17"   | \$99.00     | _____           |
| A/L R102 | 10½"     | 23"   | \$105.00    | _____           |
| A/L R103 | 12¼"     | 17"   | \$114.00    | _____           |
| A/L R103 | 12¼"     | 23"   | \$120.00    | _____           |
| A/L R104 | 14"      | 17"   | \$128.00    | _____           |
| A/L R104 | 14"      | 23"   | \$135.00    | _____           |
| A/L R105 | 15¾"     | 17"   | \$141.00    | _____           |
| A/L R105 | 15¾"     | 23"   | \$148.00    | _____           |
| A/L R106 | 17½"     | 17"   | \$156.00    | _____           |
| A/L R106 | 17½"     | 23"   | \$174.00    | _____           |
| A/L R107 | 19¼"     | 17"   | \$175.00    | _____           |
| A/L R107 | 19¼"     | 23"   | \$181.00    | _____           |
| A/L R108 | 21"      | 17"   | \$185.00    | _____           |
| A/L R108 | 21"      | 23"   | \$190.00    | _____           |
| A/L R109 | 24½"     | 17"   | \$189.00    | _____           |
| A/L R109 | 24½"     | 23"   | \$197.00    | _____           |
| A/L R110 | 31½"     | 17"   | \$199.00    | _____           |
| A/L R110 | 31½"     | 23"   | \$207.00    | _____           |
| A/L R111 | 35"      | 17"   | \$206.00    | _____           |
| A/L R111 | 35"      | 23"   | \$214.00    | _____           |
| A/L R112 | 42"      | 17"   | \$219.00    | _____           |
| A/L R112 | 42"      | 23"   | \$231.00    | _____           |



All rack cabinets are made of ¾" high-density particle board and covered with walnut, honey gold, pecan or black laminate. However, any color or wood grain laminate is available. Backs of all equipment racks feature an exclusive snap-out panel for easy access to equipment. Custom heights are available. Optional casters are \$37.00 per set. For overall dimensions add 4" to the panel height, all units are 23¼" wide overall, 17" depth racks are 18" deep overall, 23" depth racks are 24" deep overall.

|          |      |     |          |                       |
|----------|------|-----|----------|-----------------------|
| A/L R110 | 31½" | 23" | \$207.00 | ALLIED PRICE \$ _____ |
| A/L R111 | 35"  | 17" | \$206.00 | ALLIED PRICE \$ _____ |
| A/L R111 | 35"  | 23" | \$214.00 | ALLIED PRICE \$ _____ |
| A/L R112 | 42"  | 17" | \$219.00 | ALLIED PRICE \$ _____ |
| A/L R112 | 42"  | 23" | \$231.00 | ALLIED PRICE \$ _____ |

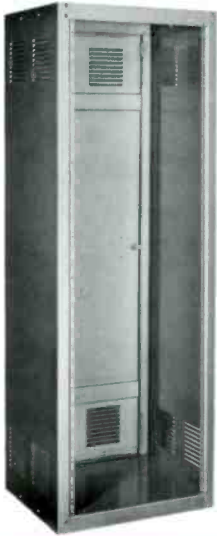

**SOUNDOLIER**

**Soundolier Cabinet Relay Racks** are designed for standard 19" rack panels. A rear door is provided as standard equipment and is hung on slip jointed hinges. Knockouts and internal louvers are among the exclusive features offered by Soundolier.

**PRICES UPON APPLICATION  
CALL TODAY  
FOR THE ALLIED PRICE**




**H.O.M.E.**



The **DR Series** of H.O.M.E. 19" modular racks includes several features including sturdy welded construction of 16 gauge CRS, optional side panels that are removable for multiple bolt-together assemblies, adjustable 11 gauge angles tapped for 10-32 screws on standard EIA spacing that makes panel mounting easy. A cable opening is provided in the bottom panel. A rear door with lock and handle is provided. You can choose from 20 standard baked enamel colors. Depths to 24" available.

**CALL FOR TODAY'S ALLIED PRICE**

**A-LINE**

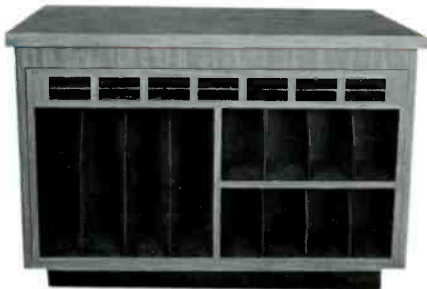

**A-LINE Turntable Bases** are constructed of 3/4" high-density particle board covered with standard laminates. Tops are 1 1/4" thick. Turntable bases are normally supplied with rack rails constructed of 11 gauge steel, tapped to accept 10-32 standard EIA rack panel screws. Cover panels are available at \$37 per bay. Custom cabinets with record and/or tape storage inserts shown here are available at extra cost.

| <i>Model</i>    | <i>Description</i>                 |          |
|-----------------|------------------------------------|----------|
| <b>A/L 201A</b> | <b>Single turntable base</b> ..... | \$246.00 |
| <b>A/L 201B</b> | <b>Double turntable base</b> ..... | \$382.00 |
| <b>A/L 201C</b> | <b>Triple turntable base</b> ..... | \$490.00 |



The **SHOCK ABSORBER JR.** is a turntable isolation platform designed for retrofit and OEM installations. It consists of a turntable mount plate and a base plate separated by four live rubber mounts. The mount plate is high density particle board with a lead strip inlaid around the perimeter. This massive plate is isolated from the base plate by four live rubber shock mounts to further reduce resonance and vibrations. The unit can accommodate all popular direct-drive turntable/toner combinations, providing up to 8-10 dB of feedback headroom and 20 dB of isolation. Standard finishes include walnut, pecan, black or gold laminate. The mount plate will be precut if the turntable/toner combination is specified with this order.

|   |          |
|---|----------|
| <b>SHOCK ABSORBER JR.</b> .....                   | \$305.00 |
| <b>SHOCK ABSORBER JR. for SP10 MARK III</b> ..... | \$359.00 |

**SHOCK ABSORBER**

Allied's turntable isolator has been integrated into a package known as the **Shock Absorber**. This approach attacks head-on the many problems associated with protecting otherwise noise free turntable-tone arm combinations from all types of interference. Gives 8 to 10 dB of feedback headroom improvement and up to 20 dB of isolation. Turntable and tone arm not included.

**SHOCK ABSORBER.....\$516.00**

**SHOCK ABSORBER for SP10 MARK III.....\$580.00**



**ALLIED RADIO BASE**

A table top turntable base that will accommodate all the popular turntable/tone arm combinations. Comes in standard walnut or black laminate. Special laminates are available at extra cost. (Turntable and tone arm not included.)

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$125.00**




**ALLIED**

The **ALLIED STUDIO PACKAGE** is the answer for remote broadcasts, news and production studio establishment, or disco operations. This convenient portable package is available wired and equipment ready in either mono or stereo with turntables, phono preamps, tonearms, phono cartridges and rugged cabinetry with solid oak trim. Design a system around equipment you already own or select your favorite brand equipment for installation. Overbridge is an optional feature. You'll find this package to be a space saving solution to many of your production problems.

**PRICES VARY DEPENDING ON EQUIPMENT SELECTED. CALL FOR YOUR ALLIED PACKAGE PRICE.**

**NOTE: (if not picked up at Richmond Warehouse--add \$150 packing charge)**

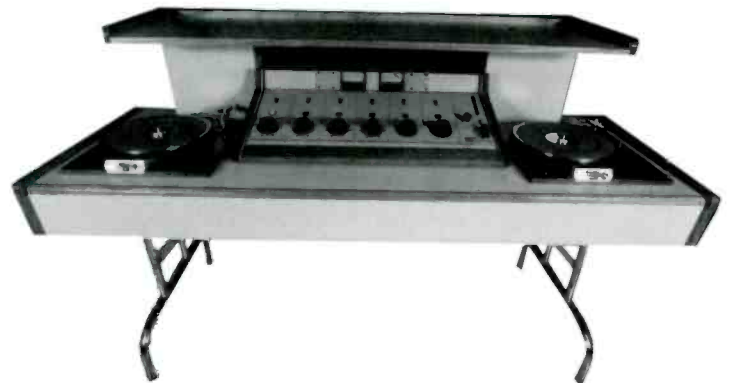

**"Products & Service  
for the Industry"**



**ALLIED**  
Broadcast Equipment

## Here's Why We're Confident You'll Choose MODULUX Cabinetry For Your Next Studio



Choose MODULUX by Arrakis for all the quality of custom cabinetry at half the price.


**MODULUX** is better by design. Until **MODULUX** studio cabinetry, you had to choose: You could pay high prices for strong and durable, well-finished custom-built cabinetry. Or you could pay less, and settle for considerably lower quality. Now there's a third choice, a better choice — **MODULUX**, built by Arrakis Systems exclusively for Allied Broadcast Equipment.

## Why Quality Cabinetry Costs So Much (And Takes So Long to Get).

Most quality cabinets are fabricated one-at-a-time. You tell the manufacturer what you want, and they make it up. It sounds like an expensive way to make a cabinet, and it is. Finally, each fully assembled unit is boxed and trucked to you. But because the boxes are so large, they can't be sent by U.P.S. or express carriers. So you pay extra shipping charges, and delivery takes extra time.

## Now MODULUX Cuts The Price Of Custom Quality Cabinetry In Half.

There's no magic. Just common sense. You see, **MODULUX** cabinetry is custom quality but each cabinet need not be custom made. Arrakis has created a unique aluminum post internal frame and wood outer panel system for **MODULUX**. These standardized elements are produced in quantity and stocked in depth at the factory.



Cutaway view shows how Polybond wood panels bolt to rigid aluminum post internal frame.

## MODULUX Is An Allied Exclusive.

Innovative answers to broadcasters' needs are what you expect from Allied Broadcast Equipment. All units are immediately available as shown, with cream color laminate side panels and dark brown "leather-look" laminate tops, all trimmed in natural oak. Other colors and finishes can be ordered at a moderate up charge. With **MODULUX**, there's no need to compromise on style, quality, delivery and especially — value.



## But Is The Quality Really There?

Absolutely. With **MODULUX**, your money goes for quality materials and construction, not for inefficient manufacturing methods. All panels are 1/4" wood polyboard, permanently laminated on both sides at the factory and guaranteed not to delaminate in the field. Access panels are securely attached, yet easily removed, with quarter-turn fasteners. **MODULUX'S** .125 inch thick aluminum post and solid wood panel construction provides superior durability.



Natural oak trim complements color-keyed laminate panels and tops for style and durability.

## Designed With The Future In Mind.



**MODULUX** makes studio updates easy. Shown, a second turntable base being added alongside an existing base.

Another key advantage of the **MODULUX** system is flexibility. Since panels can be interchanged, the system can be reconfigured, or expanded as your needs change.




Locking the existing and new bases together and adding an overbridge creates a single integrated unit.

## MODULUX Cabinets are shipped in Strong and Compact U.P.S.able boxes.



Each **MODULUX** cabinet is shipped knocked-down, via U.P.S. Assembles fast and easy with just a few hand tools.

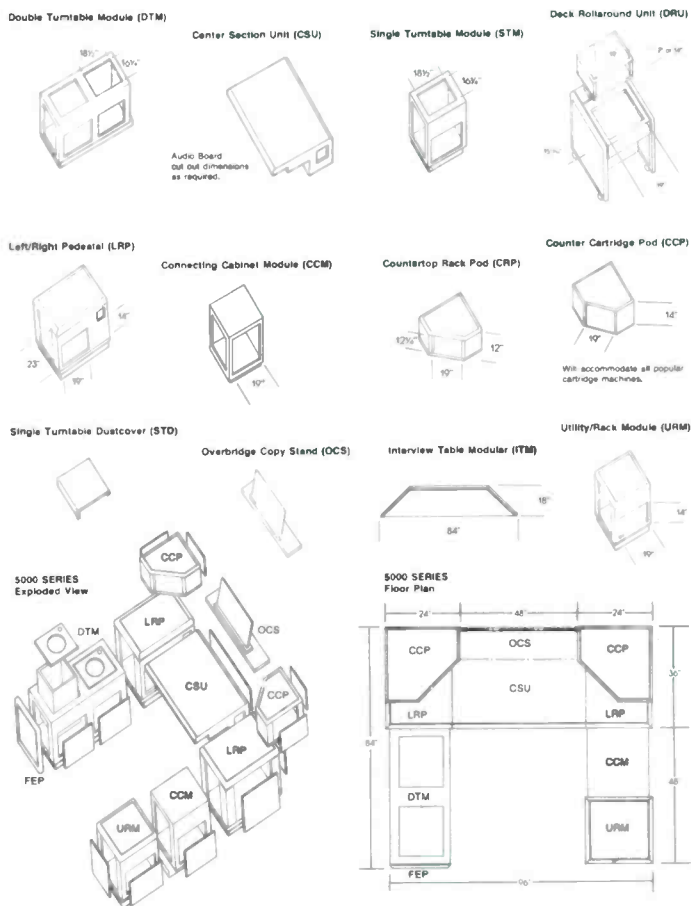

**GRAPHIC EXPRESS**



Our audio cabinet, developed through years of experience, offers both ergonomically and functionally correct designs, extreme flexibility, competitive price and is available for immediate delivery.

The ability to choose precisely the modular components needed means added flexibility for studio layouts. You can have exactly the design you want—and you can expand or modify the system later should your needs change. The modular design insures compatibility with new or existing studios. Premium quality materials are used throughout. Our work stations for on the air studios and production rooms are designed to maximize the efficiency of the operator and station's engineer. The stylish image that the consoles project, not only enhance your station's look to potential advertisers and the visiting public, but also improve the working environment.


The large number of access panels, held in place with quarter turn fasteners, allow easy cable handling and quick access to cable runs. All units provide access through cabinet bottoms for sub-floor cable ducting. Rack rails are included where specified.

Revitalize your studio and increase your efficiency through proven design and modular flexibility.

We also offer design and fabrication of custom studio cabinetry built to your specifications. Contact us for details.

**PRICES UPON APPLICATION**

**THE EXPRESS GROUP**

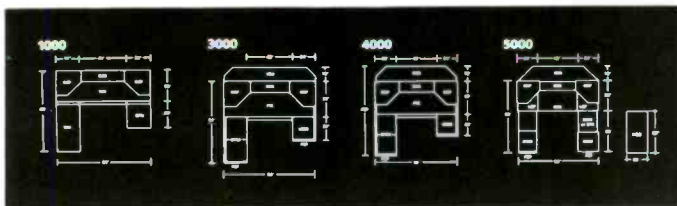

The clean look of solid multi-colored high pressure plastic laminates highlighted by the quality look and feel of solid honey oak trim give the **4000 Series** unparalleled style.

The **Express Group**. There is no finer studio furniture available. Economically designed, the Series 1000 is regarded as the new industry standard for high quality and unmatched value. Incorporating all the features required by the contemporary broadcaster, the versatility of the Series 3000 will satisfy the needs and enhance the environment of any facility.

**PRICES UPON APPLICATION**



Quality, Elegance. The **Series 5000** has set a hallmark of excellence in studio furniture design. Based on the styling of the Series 5000, custom configurations can be individually tailored.

**CONSOLE TABLE**

The **A-LINE console table** comes in a standard size 30" x 96" table top with legs and modesty panel available.

- A/L 202 Console tabletop 30" x 96".....\$167.00  
ALLIED PRICE \$ \_\_\_\_\_
- A/L 1111 Legs for console tabletop.....\$202.00  
ALLIED PRICE \$ \_\_\_\_\_
- A/L 2222 Modesty panel for tabletop.....\$39.00  
ALLIED PRICE \$ \_\_\_\_\_


**STANDARD BROADCAST DESK**



A heavily-built "real" piece of control room furniture. Standard in 29" height with tabletop of 30" x 96", this unit can be varied in size to meet your precise needs. Shipped modular for rapid assembly. A pullout kneewell back affords easy access to hidden wiring compartments. Amplifier optional.

- | Model    | Description   |
|----------|---|
| A/L 230  | Console desk, no drawers.....\$657.00<br>ALLIED PRICE \$ _____  |
| A/L 2300 | Console desk, two drawers.....\$712.00<br>ALLIED PRICE \$ _____ |

**ELECTRO-DUCT®**

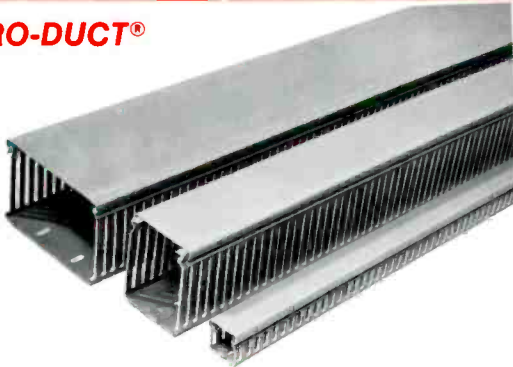

**ELECTROVERT**

This plastic duct has more positive features than any other. If you've had to fight cover-on & cover-off with inferior brands, you'll appreciate the zip-on, zip-off ability of Electro-Duct's cover.

When you buy Electro-Duct, the cover is included in the price. Allied stocks 1" x 1", 2" x 2", 3" x 3", and 5" x 3". Length: 6½ ft. Color: gray.

We went for the best so you can have the best. There are many PVC Duct manufacturers. There's only one Electrovert.

**PRICES UPON APPLICATION**

**ALLIED**

**RECORD STORAGE CABINETS**



Now your music or transcription library can be put in alphabetical or numerical order with standard or custom size record storage cabinets from Allied.

| Model     | Record Cap Size | Mfr's List | ALLIED PRICE \$       |
|-----------|-----------------|------------|-----------------------|
| A/L 1000A | 7" 1000         | \$250.00   | ALLIED PRICE \$ _____ |
| A/L 1500A | 7" 1500         | \$296.00   | ALLIED PRICE \$ _____ |
| A/L 3000A | 7" 3000         | \$354.00   | ALLIED PRICE \$ _____ |
| A/L 750B  | 12" 750         | \$256.00   | ALLIED PRICE \$ _____ |
| A/L 1000B | 12" 1000        | \$297.00   | ALLIED PRICE \$ _____ |
| A/L 1500B | 12" 1500        | \$363.00   | ALLIED PRICE \$ _____ |

**REEL TAPE STORAGE CABINETS**

Every station has a room running over with reel-to-reel tapes, commercials, programs, and a widely assorted variety of other types of taped material. The A-LINE reel tape storage cabinets are available in standard or custom sizes for every application.

| Model     | Tape Cap Size | Mfr's List | ALLIED PRICE \$       |
|-----------|---------------|------------|-----------------------|
| A/L 350TB | 7" 350        | \$216.00   | ALLIED PRICE \$ _____ |
| A/L 500TB | 7" 500        | \$340.00   | ALLIED PRICE \$ _____ |
| A/L 175TC | 10½" 175      | \$295.00   | ALLIED PRICE \$ _____ |
| A/L 250TC | 10½" 250      | \$352.00   | ALLIED PRICE \$ _____ |



**RUSLANG**



For mounting any standard 19" x 15 3/4" tape transport, the Ruslang **RL-500** is constructed with the same care as other top name furniture constructed over the past few years. Accepts Ampex, MCI, Otari and Tascam transports and includes the tilt feature.

**CALL FOR TODAY'S ALLIED PRICE**



The **Ruslang RL-600** accepts tape transports which are 19" by up to 21". This console was designed specifically for the newer generation of decks which have their electronics integrated with the transport including the Otari 5050B and others. The RL-600 is built with the same quality concern that has identified the Ruslang name for years.

**CALL FOR TODAY'S ALLIED PRICE**

**PRO RAX**

This unique rack is designed to store, protect and keep handy your compact discs (CDs). The **Model AW-40** is molded plastic.

**AW-40 Wall or Desk (Capacity 40)**  
5 3/8" W x 21 1/4" H x 4 3/4" D.....\$25.99



AW-40 Wall or Desk

**SUNRISE**

This handcrafted, dual-sided CD holder stores 40 discs horizontally. It is of solid walnut construction mounted on a lazy-susan base.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$69.95**

**ALLIED PRICE \$ \_\_\_\_\_**



SG-IID

**ALLIED**

Allied Replacement **CD Jewel Cases** are standard compact disc size. Durable plastic construction. Ideal for breaking up double and triple album sets. Minimum order of ten. Quantity discounts available.

**PRICES UPON APPLICATION**



**BELDEN WIRE**

**Belden** is recognized as the leader in the wire/cable/cord industry and manufactures thousands of different electronic cable and cord constructions utilized in a vast assortment of applications. Many cables are custom designed/manufactured for specific applications prior to becoming standardized for systems in data processing, computers, medical applications, broadcasting, etc. Belden Black 8451 is especially popular with broadcasters as well as 8728. With Belden in our "back yard," we offer you the world's largest inventory of wire/cable/cord available to anyone, anywhere because Allied distributes the entire Belden product line.

Just a sample of broadcast applicable cable:

- #8766-22 Gauge Solid Conductor - .64 mm dia. U.L. style 2464 300V 80C available in lengths of 100, 500 or 1000 ft., 15 pairs, with .013 insulation, jacket thickness of .045 and nominal OD of .525
- #8776-22 Gauge Stranded Conductor - .76 mm dia U.L. style 2493 60C. Available in lengths of 100, 250, 500 or 1000 ft., nominal center cond. 15Ω/M' with nominal shield of 163Ω/M', 15 pairs, with chrome PVC jacket and nominal OD of .580

**CALL TODAY FOR SPECIFICATIONS & ALLIED ECONOMICAL PRICING**

**WEST PENN WIRE**



Put some color into your life by using **WEST PENN** easy to strip color shielded cable. A particular favorite of broadcasters is #291 two conductor twisted pair shielded cable. #291 comes in 22 AWG stranded with a 24 AWG drain wire with insulation colors of white, red, brown, black, yellow, green, gray, blue, violet and orange. This product is comparable to the leading manufacturers, but with reduced price structure.

**ALLIED OFFERS THE ENTIRE WEST PENN LINE ON A VERY COMPETITIVE PRICE STRUCTURE. CALL FOR TODAY'S ALLIED PRICE.**

**OMNIMOUNT**



The **Omnimount Mounting System** puts added flexibility into a wide variety of equipment mounting functions including speakers, clocks, and some types of equipment including monitors. Omnimount is of industrial quality, built to last a long time. A key to its remarkable performance is the ball joint design. The ball is molded of an ebonite polymer compound, with excellent memory-return and is just about indestructible. The ball is bonded to the thick-walled carbon steel tube the same way that heavy duty motor mounts are bonded. You can mount Omnimount on the wall or ceiling and it does its job with extraordinary flexibility, not limited to the usual "pan and tilt" functions. A wide variety of models is available to choose from.


**CALL FOR TODAY'S ALLIED PRICE**

**“Buy or Lease from Allied”**

**ALLIED TERMINATION SYSTEM**

Allied can offer everything you need to establish a type "66" punch block wiring system in your studio or station.

**"O" PADS**



Where specific attenuation is needed the Allied "O" pad can provide a choice of 3, 6, 10, 17, or 23 dB attenuation.

**TERMINATION**



Your choice of vertical or horizontal termination 300, 600 or 10K ohms. Terminating, bridging, or build-out.

**"SA-1" BRIDGE CLIPS**



For jumper application in use of "66" punch block wiring.


**PUNCH TOOLS**



| Model | Description   |
|-------|---------------|
| S66MT | spring loaded |
| S66BT | manual        |
| S714  | automatic     |

For punch board wiring applications, this is the most efficient method utilized.


**"66" PUNCH BLOCKS**



| Model    | Description          |
|----------|----------------------|
| S66B3-75 | Group of 2 clips x 3 |
| S66B3-50 | Group of 3 clips x 2 |
| S66B4-25 | Group of 6 clips x 1 |


The easiest way to accomplish complex wiring projects. A must for efficient console, rack mounted equipment or other types of wiring installations.

**"ST" CONNECTOR**




Easy punch block hook-up is available with the standard of the industry, the 3M "ST" connector.

**"E9E" CRIMP TOOL**



The perfect tool for use with "ST" connectors and for other crimp applications.

**SNAP-IN WALL MOUNT**



Perfect for mounting a type "66" punch block on the wall or any available space. The model S66B6 will fit most standard punch blocks.

**WIRE AND CABLE HANGERS**



S66145

| Model  | Description  |
|--------|--------------|
| S66147 | Cable hanger |
| S66145 | Cable hanger |


S66147

Allied has wire and cable hangers for every application.

**CALL FOR TODAY'S ALLIED PRICE ON TERMINATION COMPONENTS.**

**When only the best  
will do . . .  
ALLIED will supply it.**



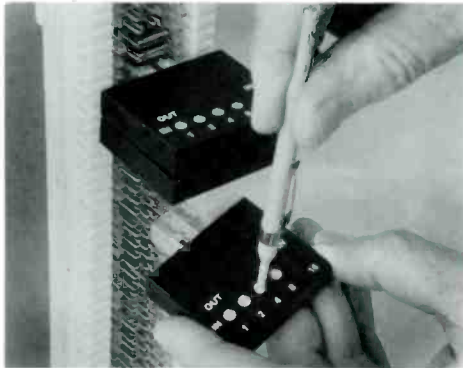

**LARUS**

The **66 SwitchPad** features compact plug-in switch selectable attenuators that install directly onto split 66M type connecting blocks to provide flexibility in establishing circuit loss levels on dry voice or data circuits.

Space saving 66 SwitchPads provide 0 to 31 dB attenuation in 1 dB steps, offer installation simplicity, and require no additional mounting assemblies or hardware. The attenuators plug directly onto two vertically adjacent rows of installation displacement terminals of the connecting block in place of bridging clips.

Attenuation level set is accomplished by setting the miniature switches to insert the required attenuator sections into the circuit.

**ALLIED**



Action responsive, secure comfort that's built to withstand years of constant use. The **ALLIED Chair** features an upholstered floating action back attached to a solid steel back brace. The upholstered waterfall seat rotates a full 360° on a solid steel threaded stem. The base is made of heavy gauge tubular steel with an electronically welded footing for added stability and comfort. Finally, every metal part is finished with top grade baked enamel to insure scratch and chip resistance. Stock chair includes chrome legs and footing, black frame finish with either brown or black upholstery, and casters.

**MODEL 2200 "LOW" CHAIR** . . . adjusts 19" - 24." Shipping box: 20¼" x 21" x 16½." Shipping weight: 28 lbs.


**MODEL 2600 "HIGH" CHAIR** . . . adjusts 24" - 29." Shipping box: 20¼" x 21" x 18¼." Shipping weight: 29 lbs.

**GENTNER**



The **Gentner Flexiblock** is an insulation-displacement punch block system made specifically for stranded wire. Connections to Flexiblock are fast, easy and reliable. A high number of connections may be made in a small space (up to eight connections per circuit) and connections are virtually short-circuit proof. Standard size is 10"L x .56"H x 3.37"W with 50 terminals. (Variables available)

**FB25**.....\$21.95

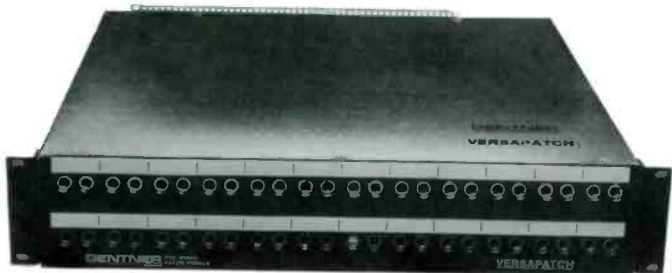


**Flexiblock makes downsize Versapatch the most versatile, flexible prewired patch panel you can buy.**

**Gentner's Versapatch** is a prewired patch panel enclosed in a chassis. The rear of the chassis gives easy access to the jacks; stranded wire cables are neatly bundled across the hinge and terminated on Flexiblock punch blocks. Individual designation strips allow you to change one circuit's designation quickly and neatly - no need to remove and re-do an entire row's designation for one change.

Versapatch is available with Tip-ring jacks; normals are jumpered at bay or Top-row bridged for monitoring capability. Various bay types from 24 to 96 jacks with various termination types are selectable.


**Prices upon configuration selected. Call for details and ALLIED pricing.**

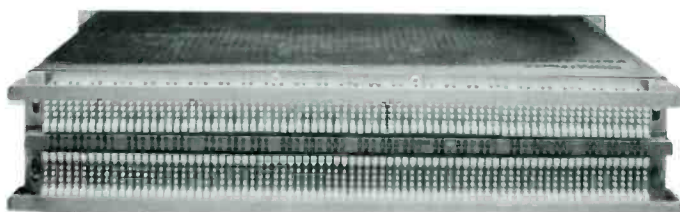

**GENTNER**

The **Gentner pre-wired patch panel** allows you to specify exactly the composition configuration you need for your application by selecting from five (5) bay types, two (2) jack types, five (5) normals, six (6) terminations plus cable and bundle length. What could be nicer?

**ALLIED pricing must be quoted due to variables.**  
**ALLIED carries the entire Gentner product line. You will find them in various locations in this catalog.**

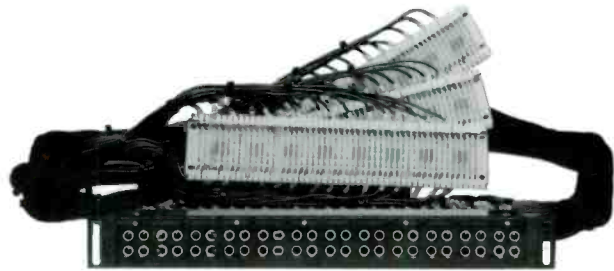


**ADC**

ADC's new **Pro-Patch** jackfield is truly state-of-the-art, incorporating the split cylinder contacts. Pro-Patch units are reusable and especially suited for remotes, special broadcasts and advance builds, with the ability to change circuits and normalling configurations in seconds. Pro-Patch jackfields provide the ultimate in time and labor savings, flexibility, and ease of installation and maintenance.

**Ultra-Patch** panels, another innovative product utilizing ADC's split cylinder technology, were designed to provide yet another set of options for audio patching and interconnect requirements.

Ultra-Patch panels can be terminated at the factory to any of ADC's standard or custom jackfields and may be rack or wall mounted. Accessory brackets are available for racks with nonadjusting rear supports as well as for wall mount applications. Cable troughs, front and rear, provide for a clean and professional look for any system. Ultra-Patch panels are available separately.

ADC's standard line of **AUDIO JACKFIELDS** features an extensive selection. Choice of jacks, panel size, normal line options, cable length (3 to 8 feet) and variety of terminations (stub end with leads identified, Christmas tree, Telco "punch down" terminal block, or ADC's new ultra patch panel) combine to give you more than 280 possible configurations.

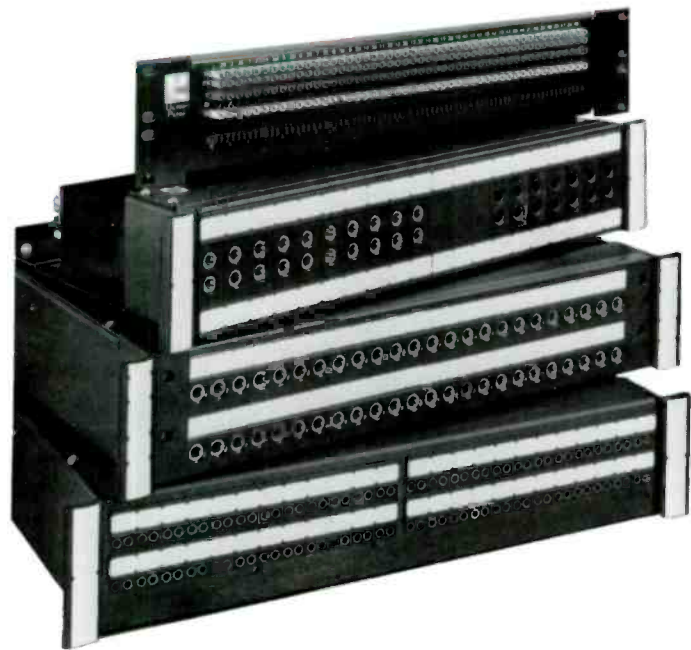


**SWITCHCRAFT**

Allied is pleased to make the complete Switchcraft line available to the broadcast industry. Their A3M and A3F connectors have quickly become an industry standard.

Patch panels of almost every description are available and are regularly stocked.

**PRICES UPON APPLICATION**

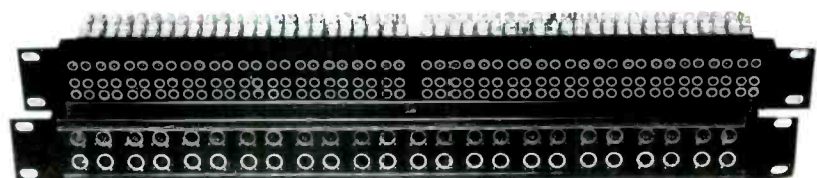



An adaptation of technology to a unique application is the 70,000 candlepower **"STROBE SERIES"** of telephone and "ON AIR" warning lights from Allied. These bright attention drawing lights come in a variety of lens colors including white, blue, red, amber and green, lettered with "PHONE" or "ON AIR." 12 and 24 volt DC and 115 VAC "ON AIR" models are available. Only 115 volt AC models available for "PHONE." Size: 4½"H x 2¾"W x 1½"D

| Model   | Voltage     | Message | Price   |
|---------|-------------|---------|---------|
| WHI-12  | 12VDC       | ON AIR  | \$69.00 |
| WHI-24  | 24VDC       | ON AIR  | \$69.00 |
| WHI-115 | 115VAC      | ON AIR  | \$69.00 |
| PS11AWA | 115VAC only | PHONE   | \$84.00 |



The Allied **"MICRO SERIES"** warning light is supplied with one 1820/28 volt lamp. The unit is designed for use with 24 volts for extended life. All models mount on standard single gang wall boxes or plaster rings. The wedge shaped translucent cover is available in red or white.

| Model | Voltage | Message | Price   |
|-------|---------|---------|---------|
| L-101 | 24 VDC  | ON AIR  | \$28.80 |
| L-101 | 24 VDC  | BLANK   | \$22.50 |

Enhance the environment of any broadcast application with the Allied **"ARCHITECTURAL SERIES"** of warning lights (shown at left). The series includes flat wall and wall or ceiling mounted models. These are well constructed warning lights made in a one piece die cast aluminum housing of 1/8" minimum wall thickness. There's no external hardware. The spring clip mechanisms firmly secure the directional panel to the housing eliminating light leaks. The extending bracket and ceiling units have a cast aluminum canopy.

| Type              | Message    | Price   |
|-------------------|------------|---------|
| Flat Wall-7½"x7½" | ON THE AIR | \$66.00 |
| Ceiling-7½"x8½"   | ON THE AIR | \$75.00 |

The model of warning light that has served the broadcast industry for many years is the Allied **"STANDARD"** model. This durable, highly visible and efficient on air warning light is available now. Size: 7⅝"H x 5¼"W x 4⅜"D.



FLAT WALL



EXTENDED  
OR  
CEILING MOUNT



STANDARD

**FIDELIPAC**

Your broadcast or recording studio will really be "off limits" when **Fidelipac Studio Warning Lights** are lit. Their brilliant red lettering on jet black background can be seen even in the brightest ambient light conditions. With a faceplate of unbreakable plexiglas, the light includes lamps and mounting hardware. Custom legend minimum 6 pieces. Size: 5"H x 10" W x 2½"D.

| Model | Message   |
|-------|---|
| 340-S | ON AIR-English, French, German, Greek, Japanese, Polish, Russian, Spanish or Swedish. |

MANUFACTURER'S SUGGESTED LIST PRICE.....\$50.00  
ALLIED PRICE \$ \_\_\_\_\_



**TITUS**

This flush mounted **ON AIR LIGHT** from **TITUS** was designed to provide the broadcaster with a low voltage device which can be mounted horizontally or vertically and have simple bulb replacement. Unit uses #1819 bulbs for 24V operation and #1815 for 12V operation, and measures 8¼" by 4¼".

MANUFACTURER'S SUGGESTED LIST PRICE.....\$125.00  
ALLIED PRICE \$ \_\_\_\_\_





**TITUS**

Finally . . . an "ON AIR" light that adds to the appearance of your studios! Titus Technological Laboratories ON AIR light provides the broadcaster and recording studio with a beautiful but practical means of indicating a studio is in use. It features a smoked glass window mounted in either a gold or silver frame which is attached to an oak mounting base. The light uses four 24 VDC bulbs which almost completely eliminates the chance of total failure. Bulb replacement is quick and easy. The "ON AIR" or "RECORDING" only appears when illuminated and is blacked out when not in use.

Model OAL-HG.....\$125.00  
Model OAL-VS.....\$125.00

ALLIED PRICE \$ \_\_\_\_\_



**LUXO**

The Model LM-1 from Allied is a high quality piece of studio furniture. The LM-1 will hold any microphone up to 3 pounds maximum. You have a choice of three mounting bases. Please specify base A, B or C. Color selection: Oyster or Black.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$46.35


ALLIED PRICE \$ \_\_\_\_\_



**SONEX**

**SONEX by ALPHA AUDIO**

With its patented anechoic foam wedge, SONEX absorbs and diffuses unwanted sound in your studio. And it can effectively replace traditional acoustic materials at a fraction of the cost. SONEX blends with almost any pro audio decor and looks clean, sharp, professional. Check into this attractive alternative for sound control. Call or write us for all the facts and prices.

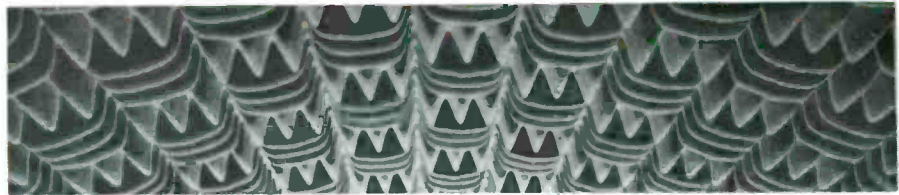

| SHEETS      | Natural Colors<br>Charcoal, Brown, Tan<br>(Natural Brown & Tan not available in 4" depth) | Depth   | Sheets Per Box | Sq. Ft. Per Box | Pricing*     |
|-------------|---|---|----------------|-----------------|--------------|
|             |   | 2"  | 8              | 128             | \$286.00/box |
|             |   | 3"  | 6              | 96              | \$280.00/box |
|             |   | 4"  | 4              | 64              | \$274.00/box |
| AUDIO TILES | Natural Colors<br>Charcoal, Brown, Tan  | 2"  | 8              | 128             | \$367.00/box |
|             |   | 3"  | 6              | 96              | \$359.00/box |
|             |   | 4"  | 4              | 64              | \$352.00/box |
|             |   | Painted Colors<br>Silver, Blue, Brown, Orange | 2"             | 28              | 50           |
| 2"          | 28  |   | 50             | \$293.00/box    |              |

Boxes of Tiles include 3 tubes of adhesive.

\*Subject to pkg. discounts.

**AUDIOMETRICS**



**MODEL M2MDU**  
Single mic arm  
(Black or Gray)



**MODEL M2MDU**  
Single mic arm with optional  
Model EB-1 Extension Arm  
(Black or Gray)



**MODEL MJRM1**  
Single mic arm  
(Light weight version of M2MDU)  
(Gray only)

**CALL FOR THE ALLIED PRICE ON THESE MIC ARMS & ACCESSORIES**

(All models shown with optional riser)



**MODEL M3MDRU**  
Two joint single mic arm  
(Gray only)




**MODEL TMA**  
Triple mic arm  
(Gray only)



**Hold Everything**  
**M2MD-U Mic Arm**

**ACCESSORIES FOR AUDIOMETRICS MIC ARMS**



**HEAVY SPRINGS**



**MODEL 14100**  
**RISER**  
(Black or Gray)



**MODEL EB-1**  
**EXTENSION ARM**  
(Black or Gray)



**MODEL 11426**  
**WALL MOUNT**  
(Black or Gray)



**MODEL 11427**  
**BENCH MOUNT**  
(Black or Gray)



**MODEL 14005**  
**CLAMP MOUNT**  
(Black or Gray)

**KEITH MONKS**

**Fish poles** or **hand booms** are ideal for miking up audience reaction and comment when a normal stand cannot be used. All four models are finished in matte black for T.V. and film use.



| Model  | Minimum Length | Maximum Length | Number of Sections |
|--------|----------------|----------------|--------------------|
| FP 363 | 25"            | 65"            | 3                  |
| FP 364 | 37"            | 106"           | 4                  |
| FP 365 | 45"            | 114"           | 3                  |
| FP 366 | 30"            | 75"            | 3                  |
| FP 367 | 53"            | 186"           | 4                  |

**ATLAS**



**GRIP-ACTION MICROPHONE FLOOR STANDS**

Include self-leveling, shock-absorbing pads and stabilizers. Tube assemblies and clutch are chrome plated. Threaded for use with any 5/8"-27 microphone or microphone holder.

| Model  | Application/Features | Height   | Base Dia. | Wt/Lbs |
|--------|----------------------|----------|-----------|--------|
| MS-10C | General Purpose      | 35"- 63" | 10"       | 10     |
| MS-12C | Low Profile Base     | 34"- 62" | 10"       | 11     |
| MS-11C | Chrome Base          | 34"- 62" | 10"       | 12     |
| MS-4†  | Special Height       | 25"- 65" | 10"       | 11     |
| MS-20  | Heavy Duty/Stage     | 37"- 66" | 12"       | 14     |
| MS-25  | Professional/Studio  | 38"- 67" | 17"       | 23     |

**TOUCH-CONTROL MICROPHONE FLOOR STANDS**

Unique, automatic sleeve-action clutch for effortless, instantaneous height adjustment at any level.

|        |               |          |     |    |
|--------|---------------|----------|-----|----|
| MS-11S | Chrome Base   | 39"- 62" | 10" | 13 |
| MS-12S | Charcoal Base | 39"- 62" | 10" | 13 |

† 3-Section Tube, 2 Grip-Action Clutches

**MICROPHONE DESK STANDS**

| Model | Application         | Height | Base Size       | Wt/Lbs |
|-------|---------------------|--------|-----------------|--------|
| DS-1  | Executive Desk      | 4"     | 7" x 5"         | 2      |
| DS-2  | Vibration-Isolating | 4"     | 5 3/4" x 4 3/4" | 2      |
| DS-4  | Lightweight         | 4"     | 5" Dia.         | 1/2    |

**PORTA-SERIES MICROPHONE FLOOR STANDS**

Unitized construction for fast set-up and storage-convenience.

| Model  | Application/Features | Height   | Wt/Lbs |
|--------|----------------------|----------|--------|
| PS-C   | General Purpose      | 35"- 63" | 6      |
| PS-C3† | Special Height       | 25"- 66" | 6      |
| PS-S   | Touch-Control Clutch | 40"-63"  | 7      |

**MICROPHONE BOOM STANDS AND BOOM ATTACHMENTS**

SB-36 General Purpose Studio Boom - Secure and dependable. "Air-Lock Cushion" and swivel joint at mic end. Boom 62" long; adjustable 48" to 72" vertically. All tubular section chrome plated. Modern base. Weight 36 lbs.  
 SB-36W Mobile-Identical to Model SB-36, equipped with rubber casters on base. Shipping Weight, 38 lbs.  
 BB-44 Contemporary Boom Arm-One-piece swivel. Length, 31"  
 PB-1 Porta-Series Boom Arm-Chrome tube, 31" long. Tapered counterweight.  
 PB-1X Microphone Boom with Extension-2-section tube. Adjusts from 31" to 50" With counterweight.  
 PB-2X Microphone Boom with Extension-For portable application. 2-section tube. Adjusts from 21" to 40"





**AKG**

The **K-45** is an excellent choice whenever an economical, rugged headphone is preferred which is high in performance, supra-aural and is a true "open air" design. It's equipped with large transducers such as those found in higher-end models. Provides supreme clarity and definition throughout the entire frequency spectrum. It's vented acoustical foam earpads are cardan-coupled on a flexible plastic headband.

**MANUFACTURER'S SUGGESTED LIST PRICE .....\$55.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **K-18** is an ultra-lightweight boom set. It consists of two monophonically connected dynamic earphones and boom arm with noise-cancelling dynamic microphone. The headphone matches with 4 to 300 ohm outputs and comes with a 3¼ ft. cable with stripped and tinned leads.

**ALLIED CARRIES THE ENTIRE AKG HEADPHONE LINE.**

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$65.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**ASTROLITE**



The **2637-G1** has a noise cancelling electret mic with performance equalling fine studio microphones. Its noise cancellation properties make it suitable for use in noisy environments. The 2637-G1 features phantom or battery power.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$299.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **2636-G1** features ear-enveloping cushions which provide attenuation for use in noisy environments. The close-talking dynamic mic equals the performance of studio microphones-even in high ambient noise levels. Comes with ventilated or standard earphone cushions. Ventilated cushions optional.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$229.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**KOSS**



It's hard to believe that Koss could improve on the previous models, but just slip on the **PRO 4AAA** and you'll hear a clarity, brilliance and liveliness you've never heard before. Deep, rich lows and crisp, clean highs. The triple A features an extra large 1" voice coil and oversize diaphragm, special earcushions and a dual suspension headband for extra comfort.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$59.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**RANE**



The rack-mount **HC-6** offers more performance and flexibility than you ever hoped for. Designed into the HC-6 are separate inputs for each of the six stages, which individually bypass the master stereo inputs. The HC-6 can handle up to six totally separate programs for many additional applications including custom headphone monitor mix. ALL OUTPUTS MAY ALSO BE FED FROM ONE INPUT.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$369.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## SENNHEISER

The **HD-410SL** is an improved version of original Sennheiser "Open-Air" headphones offering natural sound with smooth frequency response and realistic dynamic range over the entire sound spectrum. The swivel-action headband adjusts for comfortable fit. The soft, lightweight cushions caress the ears for fatigue-free listening.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$69.00**

**ALLIED PRICE \$ \_\_\_\_\_**

Sennheiser's **HME 1410 M Series** headsets utilize the MKE 2 omni-directional microphone mounted on a rotating boom which easily facilitates wearing the mic on either the left or right side of the head. The "OPEN-AIRE" headphones are a updated design based on the HD 410 headphone. All cables enter the unit on the boom side, and the headphone elements are wired from above the ear making the HME 1410 M Series much less cumbersome to use than other headsets.

**HME 1410 M1 (mono) 1/4" mono plug.....\$330.00**

**HME 1410 M2 (stereo) 1/4" stereo plug.....\$330.00**

**HME 1410 M3 (stereo) 1/4" stereo plug.....\$330.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## TELEX

The **PH Series** is an extremely comfortable, lightweight boom mike headset for on-the-air announcers and sports-casters. It features a unique differential microphone that produces a polar pattern to help create sound equal to a controlled studio set-up. Quality dynamic earphones utilize an ultra-thin mylar diaphragm, a precision wound fine copper voice coil, and a rare earth samarium cobalt magnet. A small, multi-funtion in-line power package with belt clip provides true balanced line audio output for maximum system compatibility and lowest noise.

**CALL FOR THE ALLIED PRICE**



## GENTNER

The **IC-20 Radio Station Intercom** offers a unique solution to the internal communication needs of the radio broadcaster. Along with the ability for any user to communicate with any other user, the IC-20 allows INDEPENDENT, simultaneous communication paths. In addition, the IC-20 features conference and "party line" communication as well as interfaces to your two-way radio and telephone interface systems.

The IC-20 is able to expand with your needs; you may buy additional stations as required and simply "plug them in" to the existing system, up to the maximum of 20 stations (Stations 19 and 20 are exclusively used for interfacing to your two-way and telephone systems).



**PRICES UPON APPLICATION**


**RTS**

The new **Model 802** Master Station represents a major advance in inter-communications systems. This unique, microprocessor-assisted control station provides 22 independent signal paths operating in up to six separate modes. And that's just the beginning. It features conference-line, dedicated-line, squawk, IFB/SA, station-iso, control functions and signaling capabilities. And user programming can adapt the operating format to individual needs in a variety of applications . . . The 802: Consider the possibilities.

The **TW Intercom System** is a high performance conference line intercommunications system that features over 30 different components to allow a broad variety of system configurations. The system is designed for teleproduction and broadcast operations as well as industrial and commercial applications. Proven performance by demanding professionals has established the TW Intercom System as a standard in the field of intercommunications.

**PRICES UPON APPLICATION**

**CALL FOR TODAY'S ALLIED PRICE**

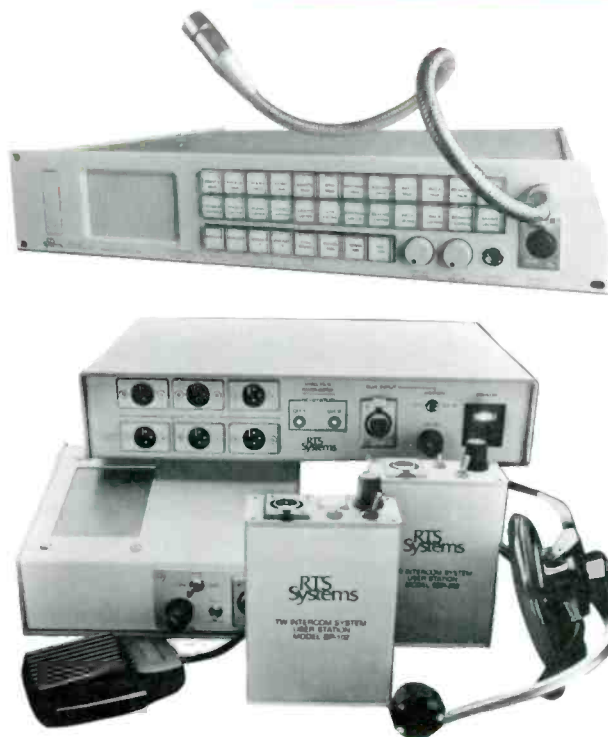

**TELEX**

The **Audiocom** is a closed circuit headset intercom system of exceptional versatility. Components may be selected for a single or multiple line intercom, suitable for small or large, indoor or outdoor, portable or permanent installations. The system provides clear two-way communications "behind the scenes" at concerts and stage productions, film or TV studios, sports stadiums or race tracks, industrial, military, public safety and security applications.

**PRICES UPON APPLICATION**

**CALL FOR TODAY'S ALLIED PRICE**



**CLEARCOM**

Clear-Com's "no-fail" © broadcast-standard system design, high output, wide bandwidth, and extensive variety of closed-circuit intercoms satisfy the most demanding communications requirements.

A basic **Clear-Com System** includes one main station or power supply with the capacity to support 100 remote stations distributed along one mile of standard, two-conductor mic cable. It is off-the-shelf expandable to suit your needs.

The Clear-Com line includes portable, custom-mount, and rackmount intercoms, IFB systems, interfaces, headsets and accessories designed specifically for audio broadcast applications.

**PRICES UPON APPLICATION**

**CALL ALLIED FOR DETAILS & PRICE**



**Entire Contents Copyright  
Allied Broadcast Equipment, Inc.**



**ELECTROVOICE**



635A



DO56



RE10



RE11



RE15



RE20



RE50

The **635A** dynamic omnidirectional is a rugged, durable microphone manufactured by Electrovoice. The sound of the 635A is the standard against which other up-close omnidirectional vocal microphones are compared.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$116.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **DO-56** is a shock mounted omnidirectional dynamic microphone for hand-held broadcast applications. All handling noises and cord vibration are isolated from the microphone element. Shock isolation is enhanced by having the main acoustic cavity and the diaphragm/voice-coil assembly isolated as a unit from the case making capsule/case collision impossible.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$143.00**

**ALLIED PRICE \$ \_\_\_\_\_**

A fine, moderate cost microphone for sound reinforcement, broadcast and stage work. The **RE-10** is similar in design to the RE-15, but meets requirements where somewhat more unit-to-unit variability is acceptable. It has effective directional control, little off-axis coloration, greatest rejection of unwanted sounds at 150 degrees off axis and a bass roll-off switch.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$197.00**

**ALLIED PRICE \$ \_\_\_\_\_**

An excellent microphone for broadcast and quality sound reinforcement, the **RE-11** is a modestly priced unit with many features of the R-16 but where the most precise unit-to-unit matching is not necessary. It has a built-in blast filter, Memraflex grille screen, a high degree of directional control, little off axis coloration and a bass roll-off switch.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$209.00**

**ALLIED PRICE \$ \_\_\_\_\_**

Literally born in a TV studio, the performance and reliability of the **RE-15** have made it a workhorse directional microphone for broadcast. Two nulls at 150 degrees off axis provide greater average rejection over the microphone's rear hemisphere than a traditional single-null cardioid pattern, particularly useful on the boom and on-stage.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$298.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **RE-20** was created especially for critical recording, broadcast, and sound reinforcement applications which require response that extends to the frequency extremes. The RE-20 provides performance heretofore available only from the most expensive condenser microphones.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$545.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **RE-50** was designed expressly for hand-held ENG. It has the same tailored frequency response and high output level as the famous 635A. The RE-50 rubber shock mount "mike-within-a-mike" design achieves a degree of shock isolation never before known in the industry. The construction is also highly resistant to damage from mechanical shock.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$172.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**"ALLIED CARRIES THE ENTIRE LINE OF E-V MICROPHONES"**

**AKG**



The **D-80** is a cardioid dynamic microphone which was designed for both vocal and music applications. It is particularly suited for use with high quality sound reinforcement systems and cassette decks. A foam wind and pop filter eliminates pop and breath noise, as well as wind noise when the microphone is used in the open.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$125.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **C-451E/CK-1** is a cardioid polar pattern microphone. The C-451E preamp with interchangeable capsules creates a modular system which can be changed to suit any studio or recording application. Special feature is low noise and high reliability. Includes foam windscreen, SA-30 stand adaptor and foam lined vinyl case.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$400.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **C-414B/ULS** pressure gradient condenser microphone has an exceptionally wide dynamic range. A unique feature is four selectable polar patterns on the mic. Thus four different types of microphones are combined into one all-metal housing with black chrome finish. This unit has low current

consumption as well as low self noise. Includes foam windscreen, SA-18/3 clamp-type stand adapter and foam lined vinyl case. Unsurpassed for digital recordings.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$995.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The world renowned **451 System**. Universal phantom powering, 9-52V. Three-step bass control with corner frequency adjustments at 75 or 150 Hz. Variables of the 451 system are available less bass control and with 48-V only powering. Assemble your system omni-, uni-, or super-directional with a great selection of pickup heads including shotgun. **ALLIED PRICE DEPENDS UPON CONTENT.**

The **D-1200E** is a boom or hand held dynamic cardioid polar pattern microphone. Electrical impedance @ 1,000 Hz is a low 200 ohms. The three-position BMS switch permits changing response to suit individual performer and environment. Elastically suspended capsule reduces handling noise in this ruggedly constructed microphone. The SA-31 "quick-release" stand adapter is also included.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$195.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**"ALLIED carries the entire AKG microphone line."**

**SONY**



A new edition of Sony's highly acclaimed and widely used professional miniature lavalier microphone offers a choice of either the familiar silver finish or a new, non-reflective matte black finish. Other improvements include both a double and single tie clip in the provided accessories. The new model **ECM-55** provides omnidirectional high performance vocal pickup and operates from battery or phantom power.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$275.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **Sony Wireless Microphone System** was designed to be able to withstand the most strenuous of professional applications. The system in no way compromises sound quality. Every possible obstacle arising from wireless design was thoroughly examined and solved, using Sony's advanced transducer and FM tuner technologies. With this reliable, high quality Sony system, wireless operation will never again be a risky proposition.

**PRICES UPON APPLICATION  
CALL FOR TODAY'S ALLIED PRICE**

**"ALLIED CARRIES THE ENTIRE SONY WIRELESS LINE"**

## SENNHEISER



This is the microphone which has become a broadcast standard. Ruggedly constructed to precision standards, the **MD-421-U** withstands hard use with Sennheiser's legendary reliability. Its pressure gradient dynamic transducer provides faultless performance both in the protected confines of the studio and the often hostile environment outdoors. Less cable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$389.00**

**ALLIED PRICE \$ \_\_\_\_\_**

Measuring a mere 5.9 millimeters in diameter and 11 millimeters in length, the **MKE-2R** represents Sennheiser's thoughtfully conceived answer to the increasing demand for small and less conspicuous lavalier microphones. Its exceedingly small size, finish and the multitude of mounting options provide the video, movie and television professions with a broad choice of inconspicuous or concealed microphone placement possibilities.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$269.00**

**ALLIED PRICE \$ \_\_\_\_\_**



Sennheiser has virtually re-invented the **CONDENSER MICROPHONE** by making the capacitive transducer part of the RF bridge - without need for DC bias or high impedance. The transformerless, low-impedance FM design provides RFI protection at the capsule, immunity from hum pickup & interference by stray magnetic fields, superior response with long cables, and direct connection to most equipment. They also have better vibration immunity than ordinary condenser units, improved acoustical properties - especially directionality, and with no DC bias, the capsule is completely immune to arc-over or performance problems due to reduction of capsule isolation resistance.

### PRICES UPON APPLICATION

**"ALLIED CARRIES THE ENTIRE LINE OF SENNHEISER MICROPHONES"**

## NEUMANN



The model **U 87** is the best known and most widely used of the fet 80<sup>®</sup> series. Its high frequency response is practically linear in its cardioid and figure-8 positions even close-up. The response below 40 Hz is purposely rolled off to prevent low frequency blocking. This roll-off may be switched to 200 Hz to allow compensation for the bass rise common to all good directional microphones when used at close range. The U 87 is specifically designed for close miking studio applications. This is *THE* world class microphone! 48 volt power supply required. Wind screen and shock mounting optionally available.

### PRICES UPON APPLICATION

The **KM 83 i** omnidirectional miniature condenser microphone is a pressure transducer with gold sputtered polyester membrane and omnidirectional pattern. The free field frequency response of the KM 83 i is linear except for a desirable slight rise at the high frequency end, which results in a flat response in the diffuse sound field.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$449.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **KM 84 i** miniature microphone has a cardioid directional pattern and is outstanding because of its nearly frequency-independent directivity.

The resulting frequency response at an angle of  $\pm 135$  degrees is almost parallel to the 0° on-axis curve. Attenuation at 135° is about 14 dB between 100 Hz and 18 kHz. As a result, a sound source impinging on the microphone anywhere within a 3/4 arc around it will have identical sound quality, even though at different levels.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$449.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **KM 85 i** miniature microphone has a cardioid directional pattern and is a special version of the KM 84 i with its virtually frequency-independent directivity. In addition, the KM 85 i intentionally attenuates more distant low-frequency sounds such as undesirable sound from sources nearby as well as wind noise (12 dB at 50 Hz), while close-up sound sources will be recorded with linear frequency response.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$449.00**

**ALLIED PRICE \$ \_\_\_\_\_**





## CROWN

The pressure recording process, invented by Long and Wickersham, introduced a bright new concept to audio engineering. They discovered that sound approaching a boundary such as a floor, wall, table, podium, etc. creates a thin zone in which the direct and reflected signals are coherently in phase and reinforce each other. The **Crown PZM** microphone creatively realizes the potentials of that invention offering significant improvements in signal clarity and range. Comb filtering is eliminated.

**PRICES UPON APPLICATION**  
**CALL FOR TODAY'S ALLIED PRICE**

## TELEX



The professional **TELEX Wireless System** transmits the microphone signal via FM radio transmission to a receiving station. The user of the microphone is thus able to move without the encumbrance or limitations of a microphone cable.

In addition to mobility, the TELEX wireless system offers other advantages such as the elimination of hum and noise pickup through the microphone cable and connectors, avoidance of microphone boom shadows, elimination of shock hazard from poor grounding, and most important, elimination of sound mixing problems as the performer moves about the stage.



The **FMR-50** Musician Series wireless microphone system provides a cleaner, better sounding signal for longer distances from the receiver. Other systems experience signal degradation within 100 feet of the receiver, while the FMR-50 signal remains crisp and strong at 500 feet or more. It operates on high band VHF frequencies between 150 and 186 MHz so there is no danger of picking up interference from low band channels such as CB, garage door openers, etc. A peak reading volume indicator allows sound pros to check volume levels quickly, and balanced mic level with associated volume control permits easy connection to existing sound systems.

**PRICES UPON APPLICATION**  
**CALL FOR TODAY'S ALLIED PRICE**

## VEGA



The **Cetec-Vega Wireless System** has led the way in this field for years. Recent developments in the Vega wireless line have made this reputation grow even more. The Vega system uses Electrovoice and Shure mic elements to insure the high quality sound reproduction. New designs have gotten rid of the now infamous "rubber ducky" antenna, added new dimensions to "wireless" applications and made the use of this type equipment more widespread than ever before in the broadcast field.

Cetec-Vega's quality **"PRO" Wireless Systems** are ideal for broadcasting and entertainment applications as well as for use in audio-visual systems for industrial seminars, church and school sound systems. The PRO systems feature the DYNEX® II audio processor for the highest signal-to-noise ratio, widest dynamic range and most natural sound. The R-31A PRO receiver features 2 LED bar graph displays - one for RF signal level and one for audio level. Either line - or mic-level outputs may be selected through the rear panel XLR connector. The receiver can be powered by either AC or external DC.

**PRICES UPON APPLICATION**  
**CALL FOR TODAY'S ALLIED PRICE**

## SHURE



Specifically designed to minimize boom microphone problems in television studio and location applications, the **SM-5B** is also excellent for radio deejay use. A smooth, wide-range frequency response with moderate presence rise makes it especially suitable for vocal pickup as well as scoring assignments. The SM-5B has a cardioid pickup pattern with exemplary off-axis uniformity, even at the extreme low end, giving minimal coloration and maximum rejection of unwanted sounds. Popular for its "warmth." Less cable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$586.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

The **SM-7** designed in conjunction with professional users, is among the finest studio professional dynamic microphones in use today. Its "smooth and silky" sound has made it extremely popular for voice-over recording in radio and television. Announcers love its "mellow" sound. Less cable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$542.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

Tiny, rugged, with wide-range frequency response, the **SM-11** is one of the world's smallest dynamic element lavalier microphones. Less than half the size of a standard microphone connector, it is ideal for on-camera TV and movie applications.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$98.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

The world-standard professional stage microphone, with the distinctive Shure upper mid-range presence peak for an intelligible, lively sound. A tough, handsome microphone that weighs less than 11 ounces, the **SM-58** is often imitated in appearance, but never duplicated in performance, ruggedness or reliability. Cable included.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$196.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

A matchless standard in high-quality professional condenser microphones, the **SM-81** is a superb studio instrument that also meets the most demanding needs of location recording and sound reinforcement. Less cable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$367.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

A hand-held, self-contained, unidirectional condenser microphone with a built-in line level amplifier, peak limiter and battery. The exceptional performance and unique features of the **SM-82** make it an outstanding choice for on-the-spot broadcasting applications. It's also excellent for long line (up to 1 mile) runs for sporting events, parades and political conventions. Less cable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$392.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

**"ALLIED CARRIES THE ENTIRE SHURE MICROPHONE LINE"**


## — MONITORS —

### QEI

The **691 FM Monitor/Test Set** is a high technology, precision instrument employing a combination of new techniques in a single, highly versatile, but very compact package. It is a complete FM test package with facilities for all proof-of-performance measurements and a wide range of trouble-shooting tests. Operator convenience and simplicity of use were primary considerations in the design of the system. It occupies only 10 1/2" of vertical rack space in a standard 19" rack. Oscilloscope not included.

| Model  | Description                                 | Price                        |
|--------|---|------------------------------|
| 691    | Modulation monitor/test set.....            | \$5295.00                    |
|        |   | <b>ALLIED PRICE \$ _____</b> |
| 691/01 | Modulation monitor/test set with 1 SCA..... | \$6295.00                    |
|        |   | <b>ALLIED PRICE \$ _____</b> |
| 691/02 | Modulation monitor/test set with 2 SCA..... | \$6695.00                    |
|        |   | <b>ALLIED PRICE \$ _____</b> |

**QEI PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

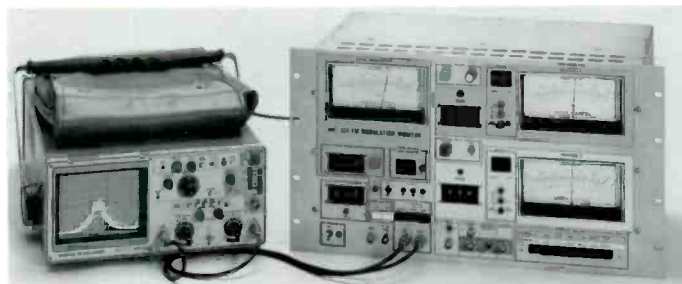

## BELAR



The **AMM-3 Modulation Monitor** is basically the same as the AMM-2B except for an ability to read both positive and negative modulation peaks.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1450.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **AMM-4 Frequency Monitor** is designed especially for ATS. Any frequency from 10 KHz to 50 MHz may be monitored for deviation.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1095.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **SCM-1 SCA Frequency and Modulation Monitor**, when added to the FMM-1, provides complete monitoring and test functions for SCA broadcasting and remote telemetering applications. Up to four crystal switch positions allow four channels to be operated and tested.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1695.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **RFA-1 FM RF Amplifier** allows for remote monitoring of the transmitter in conjunction with Main and SCA FM modulation monitoring equipment. It offers an RF input sensitivity of 100 microvolt for full output, 50 to 75 ohms of input impedance and operates from 88 to 108 MHz.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$575.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **RFA-2 AM RF Amplifier** offers a selective, high gain, all silicon solid-state unit with AGC and makes it possible to monitor off-the-air AM signals accurately and conveniently without the problems associated with changes in transmitter power level, antenna patterns and signal fading. The RFA-2 when used in conjunction with AMM-2B, AMM-3 or AMM-4 allows monitoring of modulation characteristics at a remote point.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$595.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **FMM-2** is the first to incorporate a sample hold peak modulation meter circuit independent of modulation polarity to allow the meter to respond to program peaks of the shortest duration. The heart of the FMM-2 is an ultra-linear digital discriminator which provides a distortion-free base-band signal for accurate monitoring as well as precise stereophonic and SCA decoding.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1450.00**

**ALLIED PRICE \$ \_\_\_\_\_**



Working in conjunction with the FMM-2, the **FMS-2** offers two independent peak modulation meters for simultaneous monitoring of left and right channels or L + R and L-R. It also has two independent auto-ranging voltmeters with LED displays.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1650.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **AMM-2B Modulation Monitor** sets standards in accurate AM monitoring. It's the first AM monitor to incorporate true ratio-type peak indicators. The AMM-2 contains a unique modulation cancellation scheme to recover unmodulated carrier to reference the modulation peaks to.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1195.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**BELAR**

The **TVM-1 Television Aural Modulation Monitor** is a wide-band, all solid-state TV aural monitor designed to provide accurate modulation monitoring for the TV Broadcaster, UHF or VHF. The state-of-the-art TVM-1 measures both positive and negative peaks simultaneously and automatically selects and registers the higher of the two on both the true peak meter and peak flasher. Exclusive polarity lamps indicate the instantaneous polarity of the peaks registered on the peak meter and peak flasher. Calibration accuracy may be checked at any time with the front panel push-button modulation calibrator.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2295.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The Belar Model **TVM-100 Television Aural Modulation Monitor** is a precision wideband monitor designed to measure the total modulation characteristics of mono as well as multi-channel television audio. Utilizing split sound and quasi-parallel detection modes, automatic deviation calibrators for 25 KHz (mono) and 73 KHz (BTSC Stereo) and a digital display for indication of actual deviation, the TVM-100 satisfies all requirements for mono and stereo baseband monitoring and test.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2995.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The Belar Model **TVM-200 TV Stereo Modulation Monitor** is designed to operate in conjunction with the Belar model TVM-100 TV Baseband Modulation Monitor to provide complete monitoring of BTSC stereo transmission systems. The test and measurement capabilities are enhanced by the integration of two auto-ranging voltmeters, allowing automatic measurement of channel separation, crosstalk, pilot phase and pilot level. An equivalent mode test function is also provided, which bypasses the DBX decoder for non-encoded transmitter testing. Multiple metering allows full-time monitoring of L + R and stereo composite modulation and selectable metering of total and L - R modulation along with left and right channel audio.



**MANUFACTURER'S SUGGESTED LIST PRICE TVM 200.... \$4595.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**GORMAN REDLICH**

The **CEB** offers in a single rack mounting chassis, everything necessary for the two-frequency EBS system required by the commission except a receiver that can be tuned to the station monitored.

| <b>Model</b> | <b>Description</b>                   |                 |                              |
|--------------|--------------------------------------|-----------------|------------------------------|
| <b>CEB</b>   | <b>Encoder-decoder.....</b>          | <b>\$475.00</b> | <b>ALLIED PRICE \$ _____</b> |
| <b>CE</b>    | <b>Encoder only.....</b>             | <b>\$330.00</b> | <b>ALLIED PRICE \$ _____</b> |
| <b>CE</b>    | <b>Encoder stereo opt...\$360.00</b> |                 | <b>ALLIED PRICE \$ _____</b> |
| <b>CD</b>    | <b>Decoder only.....</b>             | <b>\$280.00</b> | <b>ALLIED PRICE \$ _____</b> |

**GORMAN REDLICH PRICES ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICES.**



**“Prices and Specifications  
Subject to Change  
Without Notice”**

## INOVONICS

The **INOVONICS "TVU"** displays stereo audio level metering on the screen of a video monitor.

**FEATURES:**

- VU/PPM Switchable** with adjustable Peak Flasher in VU mode.
- High Accuracy and Resolution** for precise level setting and program gain-riding.
- Fully Annotated Display** with complete and proper scale designations. Special scales possible with custom plug-in PROMs.
- Separate Inputs** for balanced studio lines and "semi-pro" equipment.
- Self Contained** in small, "mount anywhere" box chassis. Optional rack-mount panel available.



## DAV TRONICS

The **RFA-5 AM RF Amplifier** is designed to operate frequency and modulation monitors at a location remote from the transmitter, typically at the studio. When driven by a local antenna with an RF signal as low as 0.6 mv, the RFA-5 will drive most contemporary AM monitoring equipment, as well as provide a low-level output for an oscilloscope, and a clipped/limited output for a standard frequency counter.

**PRICES UPON APPLICATION**



## GORMAN REDLICH


The Model **CM** is a stable, accurate monitor for DA installations not requiring telemetering of antenna readings. It offers true ratio readout. Non-reference and reference amplitudes are separately measured and divided electronically to give a digital readout that will not change with transmitter power and is exceptionally stable under conditions of asymmetric modulation. Stability of the readout makes readings accurate and easy to read.

**PRICES UPON APPLICATION**



The Model **CMR** is the latest in "developed technology" from G-R at a price comparable to analog monitors. With typical modulation, the CMR's true ratio readout is a factor of 10 more stable than instruments that measure normalized amplitude, and its phase readout is rock solid. Phase sign is automatic with no extra operations. Practically speaking, these features mean quick, accurate log or remote calibration readings. The CMR is fully remotable via land line or telemetry, using standard remote control equipment.

**PRICES UPON APPLICATION**

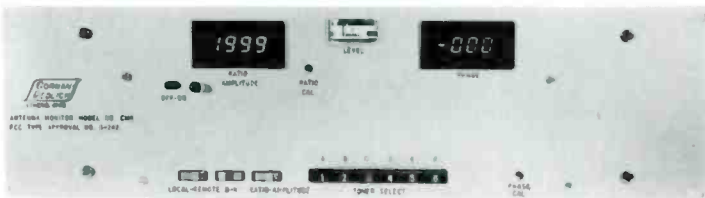

## POTOMAC

The Potomac line of **Field Strength Meters** represents a new generation of precision instruments for direct measurement of electromagnetic fields in the 100 kHz to 960 MHz frequency spectrum. These units are intended for portable field use and include a laboratory quality receiver, integral shielded loop antenna, precision attenuator, internal calibration source, and voltage regulated battery power supply. An interlock switch prevents inadvertent battery discharge when the cover is closed. Batteries are not included.

**Model Description**

|               |                   |           |                              |
|---------------|-------------------|-----------|------------------------------|
| <b>FIM-21</b> | 535-1605 kHz..... | \$2200.00 | <b>ALLIED PRICE \$</b> _____ |
| <b>FIM-22</b> | 200-550 kHz.....  | \$2600.00 | <b>ALLIED PRICE \$</b> _____ |
| <b>FIM-41</b> | 540-5000 kHz..... | \$2700.00 | <b>ALLIED PRICE \$</b> _____ |
| <b>FIM-71</b> | 45-225 MHz.....   | \$4025.00 | <b>ALLIED PRICE \$</b> _____ |
| <b>FIM-72</b> | 470-960 MHz.....  | \$5500.00 | <b>ALLIED PRICE \$</b> _____ |



**POTOMAC**

The **AM-19** is the current model of the industry's most widely used solid-state antenna monitor. It provides direct meter readout of phase angle and loop current ratio. Tower selection is accomplished with push buttons on the front panel or by external contact closure in remote operation. Directional antenna arrays of from 2 to 12 towers with DA-1, DA-2 or DA-3 patterns may be monitored with this instrument.

The **AM-19D** is identical to the AM-19 (204) except for the digital panel meters and associated circuitry. Four digit LED numeric displays provide resolution of 1/10 of one degree (phase angle) and 1/10 of one percent (current ratio). The digital readout feature of this instrument virtually eliminates operator error related to meter interpretation.

The **PMA-19 Precision Monitor Adaptor** is used in conjunction with either of the above monitors. This unit is required, for the most part, in very critical arrays. The current deviation mode provides a third measured parameter which displays directly the deviation of the current ratio from the licensed ratio.

|               |                |           |                        |       |
|---------------|----------------|-----------|------------------------|-------|
| <b>Model</b>  | <b>#Towers</b> |           | <b>ALLIED PRICE \$</b> | _____ |
| <b>AM-19</b>  | 2.....         | \$3575.00 | <b>ALLIED PRICE \$</b> | _____ |
| <b>AM-19D</b> | 2.....         | \$3875.00 | <b>ALLIED PRICE \$</b> | _____ |
| <b>PMA-19</b> | 2.....         | \$4025.00 | <b>ALLIED PRICE \$</b> | _____ |

*Additional prices upon application.*

**POTOMAC PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**



**DELTA**

The **DAM-1** is a true digital antenna monitor designed specifically for measuring the parameters of broadcast frequency directional antenna systems. Digital data is not obtained by adding an A/D converter to the output of conventional analog circuitry. Instead, the latest digital techniques and TTL components are applied to achieve a truly digital approach to phase and current ratio measurements. Data is displayed on front panel seven-segment digital readouts to minimize reading error. A simplified selection system reduces operation of the DAM-1 to a straight-forward procedure.



**PRICES UPON APPLICATION**

The **AAM-1 Analog Antenna Monitor** is designed specifically for measuring the parameters of AM broadcast frequency directional antenna systems. The monitor measures the relative current in each tower, the ratio of the current in each tower to that of a reference tower and the phase of the current in each tower relative to that of the reference tower. The AAM-1 can be equipped for up to eight input samples without external switching. Two reference towers can also be selected for DA-2 applications.



**PRICES UPON APPLICATION**

By continuously sampling the modulation levels at the AM transmitter output and comparing these levels with internal preset minimum and maximum modulation thresholds, the **AMC-1 Amplitude Modulation Controller** detects conditions of under or over modulation. The AMC-1 then uses a digital logic process to adjust the audio level of the transmitter. The audio control circuit is strictly linear so that no compression or asymmetry is added to the program.



**PRICES UPON APPLICATION**



**DELTA**

The **FMC-1 Frequency Modulation Controller** provides automatic control of the modulation levels of an FM broadcast transmitter or audio channel of a TV transmitter. The FMC-1 provides a closed loop system around the transmitter which allows the broadcast engineer to maintain modulation at the desired level despite variations in the audio level from different program sources and other system variances. Through gain is controlled by a digital attenuator maintaining true transparency at all gain settings. No clipping or compression is used.

**PRICES UPON APPLICATION**

The **APC-1 Automatic Power Controller** measures the operating power of an AM or FM station, and by interconnection to the transmitter's RAISE/LOWER controls causes the power to remain well within limits. The unit monitors a DC voltage from an external linear rectifier driven by an RF sample of the common point or base antenna current in AM applications, or a similar linear DC sample from the FM power meter or directional coupler. A special long time constant circuit removes modulation components and averages carrier shift variations in AM applications.

**PRICES UPON APPLICATION**

The **RG-4 Receiver/Generator** couples precision with reliable performance, providing an indispensable piece of test gear for broadcast engineers. An RF signal generator to excite the impedance bridge and a sensitive receiver for external null detection are housed in a single rugged case. With an OIB-1 or OIB-3, the RG-4 forms a portable impedance measuring system. Operates from 100 kHz to 29.999 MHz in 1 kHz increments. Runs off batteries, 115/230 VAC 50/60 Hz with 35 watts input power.

**PRICES UPON APPLICATION**

**Delta OIB Operating Impedance Bridges** measure the operating impedance of the individual radiators, networks, transmission line sections, and common point of directional antenna systems while they are functioning under normal power. This "operating impedance" cannot be measured by usual impedance bridge methods because the system characteristics are disrupted when the bridge is inserted into the circuit. The **OIB-1** or **OIB-3** is inserted directly in series with the transmission line, network or antenna. The transmitter power is applied and a bridge balance is obtained by manipulating two dials on the face of the bridge. Balance is indicated by a null reading on the meter on the front panel. Operating resistance and reactance are then read directly from the bridge dials.

**PRICES UPON APPLICATION**

The **Common Point Impedance Bridge** is an invaluable device for directional array maintenance. The **CPB-1** is designed for permanent installation in existing phasing equipment to provide an accurate indication of the common point impedance. The CPB-1 will handle common point powers of up to 5 kW with 100% modulation. The **CPB-1A** is designed for powers up to 50 kW.

| Model  | Description           | ALLIED PRICE \$ |
|--------|-----------------------|-----------------|
| CPB-1  | to 5 kW.....\$2100.00 | _____           |
| CPB-1A | to 50 kW....\$2500.00 | _____           |

**DELTA PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**



**B & B SYSTEMS**

B & B Systems **Phasescope AM-1B** is the complete tool for post production. It features CRT X/Y display with calibrated graticule for phase and studio operating level, SMPTE time code display of phase and genlock, CRT display of individual channel levels with calibrated graticule for studio operating level, ANSI calibrated VU meters & peak meters for each channel, and magnetic shielding. The AM-1B is self-contained in only 3 EIA rack units.

**PRICES UPON APPLICATION**



The **Phasescope AM-2** and **AM-2B** give a complete "picture" of the stereo audio signal at a quick glance. For AM and FM stereo radio broadcasters and sound recording studios, the AM-2 features CRT X/Y display of stereo audio phase, LED display of peak audio levels for left and right channels showing headroom availability, VU level meters for left and right channels, and magnetic and EMI/RF shielding. The AM-2 is self-contained in 3 EIA rack units, and the space-saving AM-2B in 2 EIA rack units.

**PRICES UPON APPLICATION**



For BTSC/MTS stereo audio applications, B & B Systems makes the **Phasescope AM-3**. On the AM-3 you can verify stereo separation on the scope display, check stereo phase on the CRT X/Y display, watch the VU meters for left, right and SAP, and monitor LED peak displays for all three channels showing headroom availability. The AM-3 is self-contained in 4 EIA rack units.

**PRICES UPON APPLICATION**



In one affordable, simple, self-contained package, **IMAGESCOPE®** gives you a true visual representation, in real time, of the balance, separation, and level of the stereo signal. The B & B Systems **IMAGESCOPE®** graphically displays the complex stereo audio signal, showing you the dispersion of energy as it will sound in the typical listening environment. It gives you an instant indication of L + R phase errors which lead to "flat" and "mushy" mono playback and transmissions. **IMAGESCOPE®** is used to position, precisely, any track or tracks within the stereo image. Stereo phase errors are now easily avoided.

**PRICES UPON APPLICATION**



The **AM-3B PHASE MONITOR** is the complete tool for all stereo audio applications. Real time visual and audible monitoring of stereo audio phase, program VU levels, Peak threshold levels, including L + R or AUX — all in one complete system. A quick glance by the operator gives a complete "picture" of the audio signal.

**PRICES UPON APPLICATION**





**B & B SYSTEMS**

The **AM-2HB Half-Rack Stereo Phase Monitor** is a truly cost-effective and space-efficient solution to the "real world" needs of today's broadcasters and post-production facilities. The B & B AM-2HR gives you real time phase, level and audible monitoring of the stereo audio signal, all in one compact affordable package. The unique B & B graticule calibration allows accurate determination of signal level and quickly verifies the degree of any out-of-phase signal condition.

**PRICES UPON APPLICATION**


**TFT**



To maximize your FM station's market coverage, you need more than a powerful transmitter. You also need all the modulation you're legally entitled to. Then you can reach all of your potential listeners. TFT designed the **Model 844 FM/Baseband/Stereo and Model 845 SCA Modulation Monitors** for just that reason. They give you the ability to modulate your transmitter to the maximum legal limit — with absolute confidence. Both the model 844 and 845 can be used for remote, off-air monitoring or for direct transmitter measurements.

**Model 844.....\$4250.00**

**Model 845.....from \$2265.00**

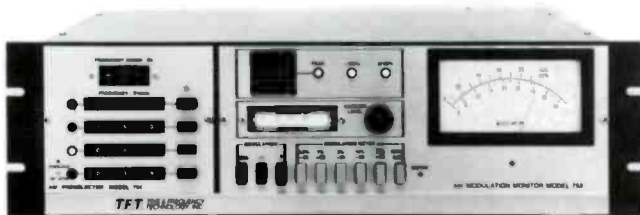

The **Model 753AM Broadband Modulation Monitor** is designed with linear-phase filters to eliminate transient filter overshoot which results from the heavy amplitude clipping of today's audio limiters. It makes extremely accurate proof-of-performance measurements and allows you to monitor your transmitter so precisely that you can modulate it to the maximum legal limits in absolute confidence.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1525.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**OTARI**



The **OTARI MX-70** is a 1" 16 channel multitrack mastering recorder that lets you do virtually anything you want to do in audio, affordably. It is specifically designed for multitrack recording and derives its features from Otari's experience with MTR-90 customers and their applications. The MX-70's microprocessor controlled constant tension transport is ideal for use with SMPTE time code-based video editing systems, machine controllers and synchronizers. Its "3-way" design (1 inch 16 track; 1 inch 8 track, and 1/2 inch 8 track) allows conversion right in the studio, so if need be, each session could be done on a different format. And as your needs change, this machine will stay with you all the way up to 16 tracks - you won't be left behind as your business grows.

**MFR's SUGGESTED LIST PRICE..... from \$14,955.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**OTARI**

The OTARI **MX5050B-II** is a ¼" two channel half track recorder/reproducer with extra quarter track reproduce head. DC-servo capstan, with ±7% vari-speed. Three speeds in 15-7½ or 7½-3¾ ips field selectable pairs. Transformerless balanced inputs and outputs. +4 or -10 dB output level select. Real time tape counter with LED display. Headphone output. Test oscillator (1 kHz or 10 kHz). NAB/IEC equalization select. 185/250/320 nWb/m calibration select. Integral splicing block. The world's most popular recorder. Available in ¼ track stereo or full track versions. Optional rack mount available.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$2795.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **MX5050BQ-II** ¼" four channel, quarter track recorder/reproducer. DC-servo capstan with ±7% vari-speed. 15-7½ ips speed. +4 or -10 dB input/output level select. Real time tape counter with LED display. Zero return. Headphone output with channel select. Test oscillator (1 kHz or 10 kHz). Microprocessor controlled transport logic. Dynamic braking. Integral splicing block. External machine control interface connector for synchronizers.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$3795.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **MX5050-Mark III-2** is a ¼" two channel, half track recorder/reproducer with extra quarter track playback head. Includes microprocessor transport logic and dynamic braking. Zero return. External machine control interface connector for synchronizers or the optional CB-116 auto-locator.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$3495.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **MX5050-Mark III-4** is a ½" four channel recorder/reproducer. Tabletop console. ½" configuration of the BQ-II. External machine control interface connector for synchronizers or the optional CB-116 auto-locator. Otherwise identical to BQ-II.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$5295.00**


**ALLIED PRICE \$ \_\_\_\_\_**

The **MX5050-Mark III-8** is a ½" eight channel recorder/reproducer. DC-servo capstan with ±7% vari-speed. 15-7½ ips speed. +4 or -10 dB input/output level select. Real time tape counter with LED display. Zero return. Test oscillator (1 kHz or 10 kHz). Microprocessor controlled transport logic and dynamic braking. Full function channel status select panel with individual or master control. Automatic monitor switching. Headphone output with channel select. External test input. Integral splicing block. External machine control interface connector for synchronizers or the optional CB-116 auto locator.

**MANUFACTURER'S SUGGESTED LIST PRICE..... \$4795.00**

**ALLIED PRICE \$ \_\_\_\_\_**



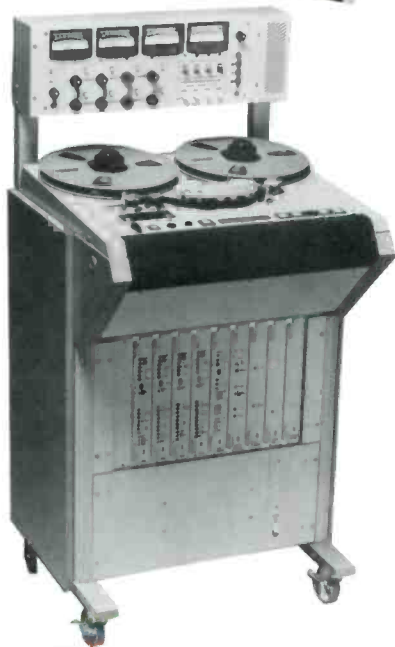

**OTARI**

The OTARI **ARS1000DC** is a 1/4" two channel, half track reproducer with 25 Hz tone sensor, end of message and cuetone relays with adjustable delay (100 milliseconds to 15 seconds). 7 1/2-3 3/4 ips speeds. 19" rack mount. Designed for automated broadcast systems and other high reliability reproduce only applications. 15-7 1/2 ips speeds available on special order.

| <i>Model</i>     | <i>Description</i>                 |                  |
|------------------|------------------------------------|------------------|
| <b>ARS1000DC</b> | <b>with 25 Hz tone sensor.....</b> | <b>\$1850.00</b> |
|                  | <b>ALLIED PRICE \$</b>             | _____            |

OTARI'S **DP4050-C2** is a compact 8:1 cassette duplicator with cassette master and three slaves. Expandable to 11 slaves with the addition of (3) DP-4050Z-3 slave units.

| <i>Model</i>     | <i>Description</i>                  |                  |
|------------------|-------------------------------------|------------------|
| <b>DP4050-C2</b> | <b>Master &amp; two slaves.....</b> | <b>\$5150.00</b> |
|                  | <b>ALLIED PRICE \$</b>              | _____            |

|                  |                                  |                  |
|------------------|----------------------------------|------------------|
| <b>DP4050-Z3</b> | <b>Three slaves for C-2.....</b> | <b>\$3875.00</b> |
|                  | <b>ALLIED PRICE \$</b>           | _____            |

The OTARI **MTR-10/12 Series** are microprocessor controlled 1/4" and 1/2" professional tape recorders offered in full, two and four track formats. Consoles feature a transport assembly that is hinged to allow easy access for maintenance. Audio and transport control circuit boards are located in a separate card frame. The power supply is also contained in a fully modular unit enabling fast diagnosis and repair. Transport control and extensive editing functions are located on the top transport operating surface while audio control switching is contained on a separate master audio control card. ACCESSORY, SPARE PARTS, CONVERSION KIT AND HEAD ASSEMBLY PRICING UPON APPLICATION.

| <i>Model</i>    | <i>Description</i>  |                  |
|-----------------|---|------------------|
| <b>MTR-10-B</b> | <b>1/4" full-track prewired for two channels in an overbridge cabinet. 7 1/2-15-30 ips.....</b> | <b>\$7550.00</b> |
|                 | <b>ALLIED PRICE \$</b>  | _____            |

|                 |   |                  |
|-----------------|---|------------------|
| <b>MTR-10-C</b> | <b>1/4" two channel in overbridge cabinet. 7 1/2-15-30 ips.....</b> | <b>\$7950.00</b> |
|                 | <b>ALLIED PRICE \$</b>  | _____            |

|                 |   |                  |
|-----------------|---|------------------|
| <b>MTR-12-C</b> | <b>1/4" two channel 12.5" reel size in overbridge cabinet. 7 1/2-15-30 ips.....</b> | <b>\$8950.00</b> |
|                 | <b>ALLIED PRICE \$</b>  | _____            |

|                 |   |                    |
|-----------------|---|--------------------|
| <b>MTR-12-H</b> | <b>1/2" two channel 12.5" reel size in overbridge cabinet. 7 1/2-15-30 ips.....</b> | <b>\$11,200.00</b> |
|                 | <b>ALLIED PRICE \$</b>  | _____              |

|                 |  |                    |
|-----------------|--|--------------------|
| <b>MTR-12-I</b> | <b>1/2" four channel 12.5" reel size in overbridge cabinet. 7 1/2-15-30 ips.....</b> | <b>\$11,950.00</b> |
|                 | <b>ALLIED PRICE \$</b>   | _____              |

OTARI PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.

**SCOTCH/3M**



When recording tape is considered, Scotch/3M is a prime contender. As an authorized Scotch audio tape dealer, Allied can quote prices for any requirement. Quantity discounts are available.

**CALL FOR THE ALLIED PRICE**

**REVOX**

The REVOX **B77 Tape Recorder** features:

- Integrated Drive Logic
- Operation by computer-type push keys
- Cutter device to facilitate tape editing

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2450.00**

**ALLIED PRICE \$ \_\_\_\_\_**

As a broadcaster you know the value of Studer reliability and importance of Revox economy. Now both are built into the **Revox PR99 MK II**. And what's more, it's designed specifically for your needs. The PR99 MK II offers balanced inputs and outputs; XLR-type connections, with calibrated and uncalibrated levels; and ASA-VU metering with LED peak indicators. The rugged die-cast chassis is designed for rack or console mounting. Reel capacity is 10.5 inches and tape speeds are selectable at 3¾, 7.5 or 7.5/15 ips with a vari-speed remote control option. Complete editing facilities include dump editing, full head access and 2-way self-sync which make the PR99 MK II one of the best in its class. The Studer designed transport and die-cast head assembly block and tension arms provide instant smooth start-up and outstanding tape handling. Here's traditional Studer quality built into the Revox PR99 MK II. Perfect for broadcasters or any professional.

**MODEL DESCRIPTION**

- PR99 MK II Recorder/Reproducer Hi or Standard Speed.....\$2799.00**
- PR99 MK II Recorder/Reproducer Lo Speed.....\$2950.00**
- PR 99 Reproduce Only.....\$1950.00**

**REVOX PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICE. CALL FOR TODAY'S ALLIED PRICE.**



**TASCAM**

The TASCAM **22-2** is the basic half-track recorder/reproducer with independent record mode selector and 1 tape/source monitor for each channel. Independent mic/line mixing and output level control for each channel. Remote pause function for record and play. 7½-15 ips speeds.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$990.00**

**ALLIED PRICE \$ \_\_\_\_\_**

TASCAM's **32** is a half-track ¼" master recorder/reproducer with 10½" reel capacity, 15-7½ ips speeds, independent L & R record mode, simul-sync, full frequency response in sync mode, function and output select and punch in/out recording. The 32 also features ± 12% pitch control, dump edit, mic inputs, independent input/output level controls, headphone jack with volume control, cue control, FL tape counter and zero return.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1599.00**

**ALLIED PRICE \$ \_\_\_\_\_**







**TASCAM**

The TASCAM **34B** is a 4-track 1/4" recorder/reproducer with 15-7 1/2 ips speeds, 10 1/2" reel capacity, full frequency response in sync mode, function and output select and punch in/out recording. The 34 also features ± 12% pitch control, dump edit, cue control, FL tape counter and zero return.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1899.00**

**ALLIED PRICE \$** \_\_\_\_\_



The **38** is an 8-track 1/2" recorder/reproducer with 8 tracks on 1/2" tape, 10 1/2" reel capacity, 15 ips speed, ± 12% pitch control and function and output select. The 38 also features punch in/out recording, dump edit, cue control, FL tape counter and zero return.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2799.00**

**ALLIED PRICE \$** \_\_\_\_\_



The **42B** is a 2-track 1/4" 2 channel half track mastering and broadcasting recorder/reproducer with 10 1/2" reel capacity, sync capability, full servo, SMPTE interlock capability through accessory connector and punch in/out recording. The 42B also features NAB or IEC equalization, dump edit, search to zero and search to cue, 7 1/2-15 ips speeds and +4/-10 input/output.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2695.00**

**ALLIED PRICE \$** \_\_\_\_\_



The TASCAM **388 STUDIO 8** is an extremely easy-to-operate 8-track production system. Its full function mixer combines with its 1/4" open reel transport to provide a complete, integrated signal processing and recording machine. The STUDIO 8 starts with a remarkably sophisticated mixing console whose internal network of submix systems lets you set it up for almost any job without patching. Now sophisticated mixing and 8-track recording can be done on a single unit, complete with a single connector SMPTE/EBU/computer interface for control by external devices. And its unique "LOAD" function ensures that once threaded, your tape will never run off the reels.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$3999.00**

**ALLIED PRICE \$** \_\_\_\_\_

TASCAM's **PORTA 05 Ministudio** is the easy personal multitrack recording machine. It's designed specifically to make multitrack recording as easy and as affordable as possible without compromising on performance or features. In a remarkably compact package it offers a top-quality 4-track cassette recorder and 4-channel mixer with all the functions and features needed for versatile creative recording — including an external effect loop and MIDI sync capability. An optional battery pack makes it comfortable and convenient to take anywhere.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$479.00**

**ALLIED PRICE \$ \_\_\_\_\_**

The **122 MKII** is the leader in Tascam's line-up of professional 4-track 2-channel stereo cassette machines. It offers extended durability and reliability to keep up with the tough, relentless pace of professional operation. It features an extremely high standard of audio reproduction quality:



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$999.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**MARANTZ**

The **201** and **221** by Marantz offer more to the Broadcast News Operation than ever before available.

- \* Outstanding Features Include: 15/16 ips (1/2 speed) or regular 1-7/8 ips
- \* Vari-speed control which allows correction of tapes which may have been recorded with less-than-full battery power
- \* PA/Play mix permits one of the most sought-after abilities: Live intro with optional microphone, actuality on tape, then back to live. (Using the cassette machine as an integral part of a telephone report)

In addition to features listed which are common to both machines, the 221 also has three heads and variable bias for normal, CrO<sub>2</sub>, and/FeCr Tape. FeCr tape permits a frequency response of up to 14 kHz.

**201 2 heads.....\$279.95**

**221 3 heads.....\$329.95**

**MARANTZ PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**



**TECHNICS**

The **SL-P1200** is the professional's compact disc player, it combines impeccable fidelity with unique styling. It is packed with Technics developments like an FFA laser pickup, a High Resolution Digital Filter with double over-sampling (88.2 kHz), Class AA circuitry, and specially designed controls. *Technics service is performed by your nearest authorized Technics service center.*

**SL-P1200.....\$1300.00**

**SL-P1200X w/XLR Balanced Outputs.....\$1450.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## TECHNICS



The **SL-P520** compact disc player features an advanced circuit configuration that utilizes class AA technology for clean, crisp sound. For convenience, the unit contains Technics 2-speed search dial that lets you cue to any point on a disc. A 10-key wireless remote control, programmable music scan, preset editing and auto space round out the list of the SLP-520's exciting features.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$475.00**

**ALLIED PRICE \$ \_\_\_\_\_**



Technic's new **SL-P720** compact disc player achieves exceptional performance. To help increase fidelity, it features TNRC (Technics Non-Resonant Compound) and metal construction that blocks and absorbs exterior noise and vibration. Best of all is Technics 2-speed search dial that makes finding specific points on a disc fast and easy. *Technics service is performed by your nearest authorized Technics service center.*

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$560.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## — REMOTE CONTROL —

### GENTNER



The **VRC-1000 Voice Remote Control** operates on the dial-up telephone system to allow you the freedom of remote control from anywhere. You communicate with the VRC-1000 by listening to its synthesized voice and commanding it with a Touch-Tone® (DTMF) key pad or portable automatic dialer. The VRC-1000 can be controlled from any location with a telephone — your home, a car, a pay phone, the studio, etc. It literally talks to you to report conditions. With over 500 English words in memory, it can be programmed (using a simple set-up procedure) to say what you need it to say in reporting conditions at your transmitter.

**Basic System Starts At.....\$2995.00**

### TFT



The **TFT 8610 System** permits any size AM, FM and TV station or other facility to have direct digital control of remote transmitters and facilities. Designed to meet today's growing needs, the System is totally modular for tailoring it to your own specific control and budget requirements. The System's telemetry and status channels may be easily field expanded to meet the needs of even the largest stations. It features 10 channels each for RAISE, LOWER, TELEMETRY & STATUS.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$3800.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## ADVANCED MICRODYNAMICS

The Advanced Micro-Dynamics **TC-8** is designed to provide highly reliable transmitter control at a modest cost. Eight metering channels are displayed on a large, easy to read dot-matrix array. The status display provides continuous tally for eight on/off inputs. Controls are easy for non-technical operators to learn and push button setup and calibration makes the TC-8 a dream to install and operate. Non-volatile memory stores all setup and calibration data for ten years without power, allowing convenient maintenance and providing orderly recovery from power outages.




**PRICES UPON APPLICATION**

## MOSELEY

The **MRC 1600** Microprocessor Remote Control System, consists of one Control Terminal, one Remote Terminal. System is equipped with 32 command relays, 16 status channels (TTL/contact closure), and 16 digital telemetry channels. FCC acceptable for AM and FM broadcast transmitter remote control. Includes audible telco/telco data interface on each terminal.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$4595.00**

**ALLIED PRICE \$ \_\_\_\_\_**

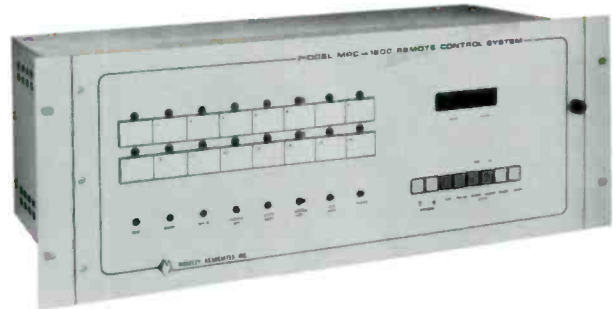

Option for cathode-ray tube (CRT) Terminal. Duplicates all panel functions of the MRC-1600 Control Terminal. Allows simultaneous display for 16 channels, including telemetry readings, status conditions, time of day, operation and error-oriented messages.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1095.00**


**ALLIED PRICE \$ \_\_\_\_\_**



Option for automatic logging. Includes I/O modules, software and Texas Instruments Model 850 Desktop Printer. Log headings and command are entered through CRT keyboard. Requires option for CRT terminal.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$995.00**


**ALLIED PRICE \$ \_\_\_\_\_**

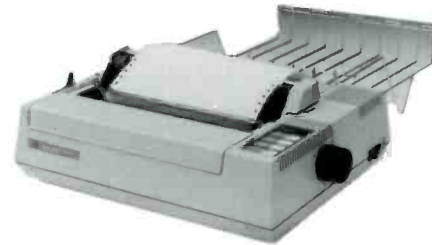


## DELTA

Delta Electronics has developed a **Remote Control/ATS System** intended primarily for unattended monitoring and control of standard broadcast, FM and TV stations. Emphasis has been placed on simplicity of operation, reliability, and cost effectiveness in the design of this equipment. The latest proven microprocessor technology has been employed to accomplish the many attractive features of this system with a minimum of hardware. Three basic components are required in this system: a control unit at the control point, a control unit at the transmitter site, and an I/O unit at the transmitter location.

**PRICES UPON APPLICATION**

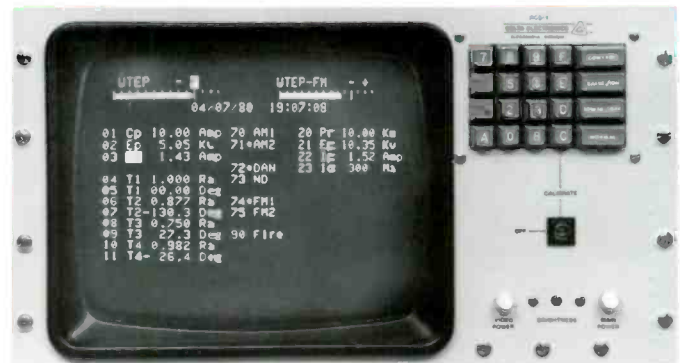

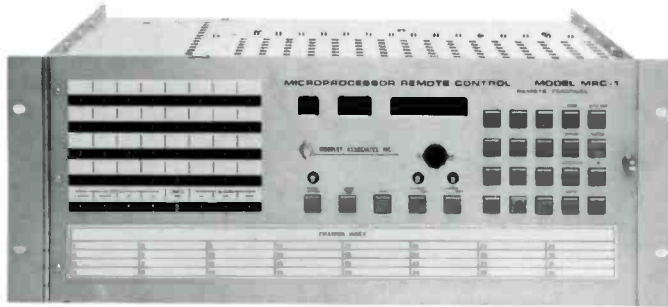

## MOSELEY

**MRC-1** Microprocessor Remote Control System. Includes one Control Terminal and one Remote Terminal. Up to nine Remote Terminals function with a single Control Terminal. For 2-wire or 4-wire dedicated wireline or equivalent interconnecting circuits. Basic system equipped for 16 command lines (open collector electronic switching), 16 status channels (TTL/contact closure), and 16 telemetry channels indicated as 16/16/16.

**PRICES AND OPTIONS UPON APPLICATION**



**MRC-2** Microprocessor Remote Control System with stand-alone Remote Terminal, consisting of one Control Terminal, one Remote Terminal. Remote Terminal includes data acquisition/command capability, precludes CRT, MDC, MSD capability for terminal. System is configured with 16 command lines (open collector electronic switching), 16 status channels (TTL/contact closure), and 16 analog telemetry channels (indicated as 16/16/16). System includes two sets of modems for main-backup wire interconnections.

**PRICES AND OPTIONS UPON APPLICATION**

## POTOMAC




**RC16+** Remote Control System. Includes SU-16 Studio Unit (16 channels): This unit contains the master controller and time clock. It sends commands to the transmitter unit and receives data from it. It is pre-programmed for each station according to user specifications. It provides manual or automatic surveillance and control at the option of the operator. Front panel indicators provide channel number, telemetry data, time and status indications. It also includes the TU-16 transmitter unit (16 channels). This unit accepts analog telemetry and status inputs and provides relay closure control outputs. It receives its instructions from the studio unit and operates the relays to control each function. Individual telemetry adjustments are provided for one person calibration under local control.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$5100.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## HALLIKAINEN

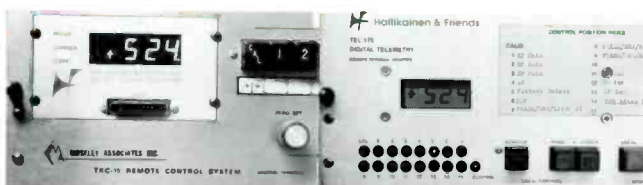

The **TEL-171** converts your Moseley TRC-15AW, TRC-15AR or PBR30 to digital metering transmission, a method that eliminates the offset and gain drift in the analog metering. A local display in the transmitter control unit duplicates the readings displayed by the studio control unit. This permits one-man weekly meter calibration.

| Model   | Description              | ALLIED PRICE \$ |
|---------|--------------------------|-----------------|
| TEL-171 | for TRC-15A.....\$800.00 | _____           |
| TEL-172 | for PBR-30.....\$920.00  | _____           |

**HALLIKAINEN PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

**HALLIKAINEN**

## DRC 190 DIGITAL REMOTE CONTROL

The DRC-190 Digital Remote Control can be operated manually, or, with the addition of standard computer peripherals, will monitor, display, and print all relevant readings including phase, relative amplitude, calculated ratios and deviations. Upon finding a parameter out of limits, the DRC-190 can be programmed to print the reading, make appropriate adjustments, then print the corrected reading along with a notation of the adjustment. With the addition of a modulation controller the DRC-190 can be programmed to meet FCC requirements for full ATS and, with distortion analysis equipment, test and log Proof of Performance data — *automatically*.

The system is based on the Motorola 6802 microprocessor. The use of a microprocessor vastly

simplifies the hardware design, thereby reducing system costs. The DRC-190 uses standard peripheral chips and bus architecture so design updates may be easily implemented by merely changing EPROMs. This insures the user that he will not be stuck with an obsolete system as integrated circuit design advances.

Unlike other systems that employ different hardware at the studio and transmitter sites, the DRC-190 studio and transmitter units are interchangeable, further reducing design and manufacturing expenses. The result is a low cost manual remote control that can expand to provide automated capabilities no other system has — *at any price*.

### SYSTEM PRICES UPON APPLICATION

### Specifications:

**Manual or automated operation:**  
RS232 port provided for computer access

**Programmable in BASIC to meet your stations requirements**

**Includes enough RAM for standard control and logging — can be expanded to full ATS**

**10 analog metering inputs**

**10 Raise outputs**

**10 Lower outputs**

**10 "Channel Selected" outputs  
each expandable to 100 channels**

**IEEE488 port provided for automated test equipment**

### Features:

**A/D converter**  
4.5 digit modified dual slope with 10.5 ppm/C degree tempco ref

**Calibration**  
Keyboard entered calibration scaling and curve

**Sample**  
 $\pm 2$  VDC max,  $\pm 100$  V maximum common mode

**Analog Multiplexer Reed Relays**  
Control Out Open Collector transistors, 0.5A, 30 VDC max

**Failsafe**  
2 failsafe outputs per site. Each user programmed to respond or ignore each possible site.

**Control Lockout**  
Control from any group of sites can be locked out at each site.

**Channels** 10, expandable to 100 in groups of 10

**Communications**  
1200 bits/second, half duplex, voice grade link. Strappable 2 or 4 wire, 2 isolated inputs and 2 isolated outputs for microwave relay stations. Open Collector transistor to key external radio transmitter.


**Applications Program Language** Microsoft Floating Point Basic

**Serial I/O** RS232/C at programmable baud rate

**Parallel I/O** IEEE 488 instrumentation bus

*Alphanumeric LCD prompts operator for required input and displays resulting readings (with label, units and decimal point)*

*16 key membrane keypad for manual operation*

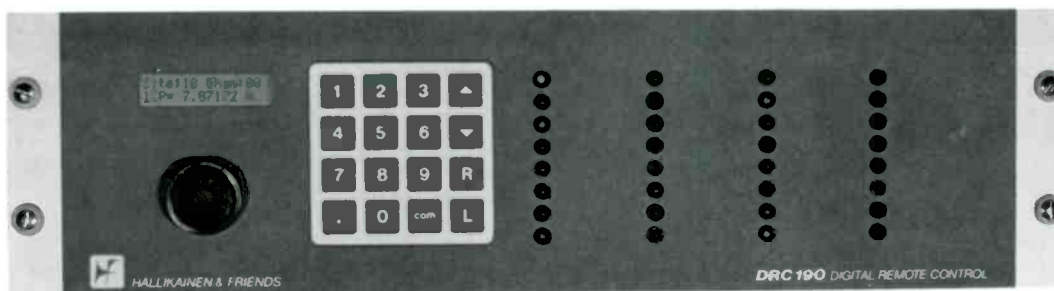

*Speaker provides audio signal for keypad operation, and intercom between sites in the system*

*RS232 port for computer access*

*IEEE488 port for test equipment*



audio~metrics®

MODEL AMCDS-1000A



## **PROGRAMMABLE CD PLAYER**

**Store 100 compact discs under lock & key  
Cues to music**

**See Pg. 19 for more details**

**— Another ALLIED exclusive —**

**MARTI**

Marti Electronics, Inc. is recognized world wide as a manufacturer and supplier of quality products for the radio broadcaster. The Marti product line is the outgrowth of the needs of founder and President George Marti. As a radio station owner in the late 1940's through the 1960's, Mr. Marti had programming desires that required equipment that was not available, or if it was available it was not at a reasonable cost. Because of his own needs, he designed and built equipment which satisfied his own programming requirements. These products were successful. Others saw, used and liked the products. Marti Electronics was begun using the same philosophy that emerged in building those first products . . . "Build a quality product that is reliable, meets a basic need, performs as it is designed to and is priced to give the user good value for his money." Marti equipment is manufactured to meet several basic needs of the radio broadcaster.

**Marti Remote Pick-Up Systems...** The Marti remote broadcast system (RPU) has for years been regarded as the standard for the industry. Broadcasters use RPU equipment to originate programs from events and locations away from their studios. The Marti system of transmitters, receivers and mobile or fixed relay stations allow a live program to be transmitted from the event to the studio with broadcast quality sound. Once the program is received at the studio, it is rebroadcast or recorded for future use.

The **Marti TSL-2 Telemetry Link** provides reliable telemetry circuits for AM, FM and TV stations. Expensive and unreliable FM Subcarrier and Telco lines can now be replaced with a cost effective Marti TSL System. This link is simple to install, easy to operate and maintain. The 2.5 watt transmitter is for solar power or other limited power source applications.

**TSL-2 RPT2/450P/RMH-3/CR10-450**  
**PRICES UPON APPLICATION**

The **Marti TSL-15 Telemetry Link** provides reliable telemetry circuits for AM, FM and TV stations, with easy installation, operation and maintenance. The 15 watt transmitter is recommended for use on medium to long paths having high signal attenuation.


**TSL-15 RPT15-450P/RMH-3B/RR30-450**  
**PRICES UPON APPLICATION**

The **RPT-2** is a hand-carried broadcast quality continuous duty transmitter. It will operate from its internal ni-cad battery, from 115 VAC power or from external 12 VDC power. A special subaudible encoder enables the RPT-2 to access Marti mobile repeaters for coverage of indoor events.

| <b>Model</b>    | <b>Freq. Band</b>               |                 |
|-----------------|---------------------------------|-----------------|
| <b>RPT2-150</b> | <b>152-172 mHz (25F3)</b> ..... | <b>\$895.00</b> |
| <b>RPT2-450</b> | <b>450-456 mHz (50F3)</b> ..... | <b>\$895.00</b> |
| <b>RPT2-150</b> | <b>152-172 (25F3)</b> .....     | <b>\$895.00</b> |
| <b>RPT2-450</b> | <b>450-456 (50F3)</b> .....     | <b>\$895.00</b> |

**All RPT2 Single Frequency Models with Battery Pac.....\$945.00**

**For Second Frequency Add \$30.00**

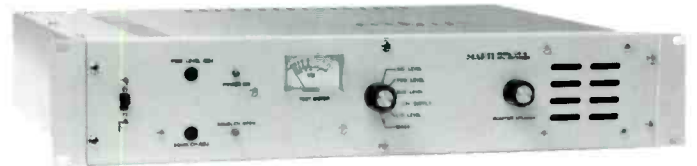

**MARTI**



**Model CR-10** is a rack-mounted VHF or UHF base station receiver designed for broadcast remote pickup service. This receiver has dual frequency capability built in. Marti Technology has provided the highest frequency response with the lowest noise and distortion possible for the assigned channel band width. Special attention has been given to solving today's high interference problems. The CR-10 features a built-in test meter, squelch relay, optional DC operation, built-in sub-audible tone decoder, special noise reduction circuit, 90 dB spurious rejection.

- CR-10 Single Freq. w/monitor speaker.....\$1045.00**
- CR-10-2 Dual Freq. w/monitor speaker.....\$1075.00**



The **Marti AR-10 Series** receiver is a portable or mobile repeat receiver. This receiver has a built-in AC power supply, and will operate from an external source of 12-15 volts DC. A built-in sub-audible tone decoder meets FCC rule 74.431 allowing this receiver to automatically turn on a mobile transmitter upon receiving an encoded signal from a hand-carried portable transmitter, thus automatically relaying a broadcast to the base station receiver over a greater distance. The receiver operates on all remote pickup frequencies and band widths. Other built-in features include dual frequency capabilities, monitor speaker, and terminals for feeding telephone lines in portable operations. The unit weighs only 5½ pounds.

- AR-10 Single Freq. ....\$1045.00**
- AR-10 Dual Freq. ....\$1075.00**



The **Model RPT-15** is a compact 15 watt transmitter designed for portable or mobile remote broadcast service. It delivers the maximum power allowed by the Commission for airborne remotes such as traffic reports. The RPT-15 has a built in power supply for operation on 115 VAC. It will also operate on an external 12-14 VDC supply. Standard features include dual frequency and subaudible encoder for use with Marti mobile repeaters and automatic repeaters. All this plus famous Marti broadcast quality and continuous duty operation.

- | <b>Model</b>                 | <b>Freq. Band</b> |                       |
|------------------------------|-------------------|-----------------------|
| <b>RPT-15 Single Freq.</b>   |                   | <b>.....\$975.00</b>  |
| <b>RPT-15-2 Dual Freq's.</b> |                   | <b>.....\$1005.00</b> |

**RPT-30** 45 watts 140 mHz to 30 watts 480 mHz. Single and dual frequency models available. 100% duty cycle with 4 inputs (All mic level or 3 mic/1 line). FM-Quality Limiter included. 120VAC and 12VDC supplies included.

- | <b>Model</b>                   | <b>Freq. Band</b> |                       |
|--------------------------------|-------------------|-----------------------|
| <b>RPT-30 All Single Freq.</b> |                   | <b>.....\$1695.00</b> |
| <b>RPT-30-2 Dual Freq's.</b>   |                   | <b>.....\$1725.00</b> |

**MARTI PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**



**COMTECH**  
**EC ANTENNA CONTROLLER**



The **EC6** Antenna Controller is designed for use with Comtech's motorized antenna systems. It is a micro processor control which stores up to 64 different satellite locations. An exceptional feature that separates the EC6 from other controllers is the program pak concept. All software is incorporated in a removable cartridge. The cartridge is accessible from the rear of the cabinet and allows updating or customizing of the software to a particular application. The antenna interface unit (AIU) is part of the EC6 package and is mounted at the antenna.

**COLORADO MAGNETICS**  
**SAT CUE 400 SATELLITE SWITCHER**



Sometimes the best solution to a problem is the simplest approach! That idea was the basis for a new satellite switcher. The **Sat Cue 400** is an audio switching unit designed to be used with satellite radio program networks. Upon activation the Sat Cue 400 allows automatic, unattended insertion of commercial audio, or news (external) audio. Activation is provided at the proper times by the satellite network cue system. The Sat Cue 400 will operate with any of the popular satellite delivered formats.

**MICRODYNE**

**1100 FFC-X1 (RDC) L DOWN-CONVERTER**



The 1100 FFC rack-mounted down-converter reduces the 3.7 to 4.2 GHz received signal to 70 MHz (center frequency). These crystal-controlled converters are ideal for either single-channel or multi-channel applications, where one 1100 FFC can accommodate multiple 1100 PCDR-5 demodulators. A simple front panel crystal change allows the use of any transponder on the satellite with no internal adjustment required. Note: This is the ultra-stable down-converter required by most SCPC demodulators! Allied also stocks all Microdyne crystals!


**1100 PCDR-5 SCPC DEMODULATOR**



The PCDR-5 is the latest design in a frequency agile SCPC demodulator from Microdyne. Exceptional flexibility is provided by the front panel five-section push-button switch assembly, which allows you to select wideband (high fidelity) or narrow band (broadcast voice grade), choose de-emphasis ratios from 0 to 75 *usec* in 25 *usec* increments, and set expander ratios for 2:1 or 3:1. The PCDR-5 will receive 15 kHz audio for stereo broadcasts as well as 5 kHz or 7.5 kHz audio programming. Other features include synthesized 10 kHz step tuning, input loop through, loss-of-carrier contact alarm and 600 ohm balanced audio output standard. No greater flexibility can be found at any price! Call Allied Satellite for details. This is the demodulator recommended most often!

**MONROE**

**MODEL 5002 SATELLITE REMOTE CONTROL**

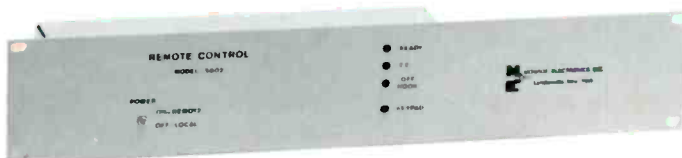

The Model 5002 Remote Control provides remote control channel selection of two dual audio modules or voice cue modules for the Comtech/Fairchild DART-384® and other digital audio receivers. Allied stocks both models.

In addition, it will permit remote transponder selection for the Comtech/Fairchild DART-384.

It includes an integral, FCC registered telephone line interface and utilizes DTMF signalling to permit access and control from any Touch-Tone® telephone.

A two-wire, 600-ohm balanced audio input permits access and control from a non-switched communications path.

Tone responses are returned to advise the calling party that the remote control sequence has been accepted.

The remote control retains the channel configurations in memory during power interruptions and returns to these configurations when power is restored to the instrument.

The remote control is housed in a 3½-inch high, 19-inch wide EIA rack mountable enclosure and includes front panel indicators that provide system status information.

**"The Satellite Equipment Shown Here Is But A Small Portion Of The Audio/Video Satellite Equipment Offered By Allied Satellite Equipment. Please Request The Allied Satellite Catalog!"**

**FAIRCHILD**

**DIGITAL AUDIO RECEIVER TERMINAL DART - 384, ABC, CBS, NBC, WESTWOOD, US, MUTUAL, CNN**





For Digital Satellite reception we recommend the **FAIRCHILD DART 384**. The DART 384 receiver consists of down-converter, receiver-demodulator shelf, audio program channels, voice cue channels, and data program channels.

The down-converter is an environmentally sealed unit which mounts at the antenna. It converts the 3.7 to 4.2 GHz output of the LNA to a 70 MHz IF signal for use by the demodulator shelf electronics. With the down-converter mounted outside at the antenna a low cost RG-6 type cable can be utilized while at the same time allowing two to three times the distance between the antenna and the receiver-demodulator shelf. A feature only the FAIRCHILD has!

Other features include crystals for all four active digital satellite transponders *standard* in all receivers. And at no additional charge a transponder crystal select switch is *standard* on the FAIRCHILD DART! Need remote channel or transponder switching? No problem, again *standard* in all FAIRCHILD DARTS via 'D' connectors on the rear of the unit. Available with: 15 kHz, 7.5 kHz and voice-cue channel modules. FAIRCHILD DART exclusively from Allied Satellite.

**WEGENER**

**SUB-CARRIER AUDIO RECEIVER**

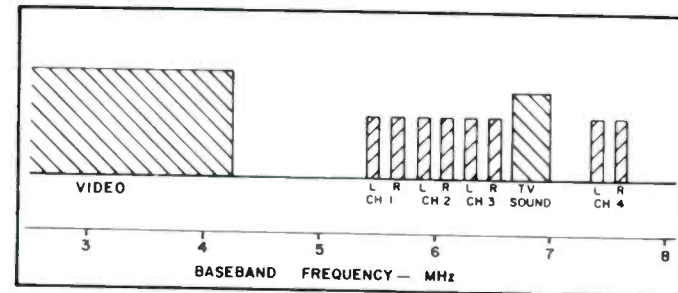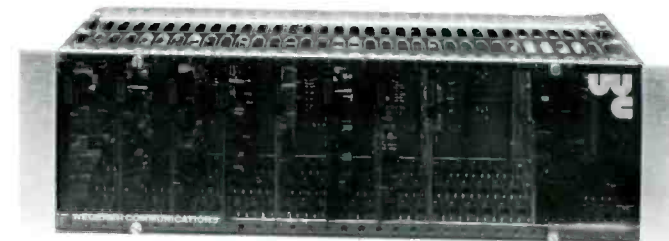

The **Model 1606 Subcarrier Receiver** consists of a down-converter shelf and plug-in IF demodulator. The RF down-converter shelf mounts on the rear of the 1601 Mainframe. The down-converter accepts 4 GHz RF input, provides a 70 MHz IF output, and is designed to interface to the IF wide-band demodulator. The IF demodulator is plug-in compatible with the 1601 Mainframe. Bandwidth is optimized for sub-carrier reception characteristics. Thumbwheel selection of transponders is available on the front panels. Provisions are made for LNA powering and polarity switch relay interfacing. Output of the 1606 is wideband-baseband designed to connect to the 1600 family of subcarrier demodulators. Allied stocks Wegener SCPC, Sub-Carrier and other fine Wegener products. Ask about Panda I and Panda II from Wegener.

**COMTECH**



**"OFFSAT" ANTENNA**

Here's a unique one-piece antenna design with an innovative offset feed that makes the **"Offsat"** the **ONLY** antenna in its size category capable of **exceeding all FCC specifications for 2 degree spacing for both transmit and receiving.**

COMTECH'S "OFFSAT" is the intelligent response to the new stricter requirements and it has the surface tolerance necessary for Ku-Band. Call Allied for the full story.



**3.8M ANTENNA**

The **3.8M** is the perfect antenna for reception of any format audio network, whether the transmission be Digital, Sub-Carrier, or SCPC. Comtech's antennas are easy to assemble, install and align. Customers love the simplified installation design for both the AZ/EL mount and the polar mount permit rapid, money-saving installations. Careful tight tolerance construction assures maximum gain and minimum beam-width so necessary for today's crowded satellite arc. Range tested gain spec of 42.9 dB! Call Allied Satellite for all the specs and a great deal!



**MODULATION SCIENCES**

The **Sidekick SCA Generator** has the first crystal controlled SCA generator in the industry. Because it is crystal controlled, the Sidekick has a frequency stability of  $\pm 0.01\%$  over 0 to 50° C. The SCA carrier is derived from a frequency synthesizer. Any frequency in the the SCA region can be selected by user programmable straps. Sidekick is designed for 150 microsecond pre-emphasis, with 75 and zero strap-selectable options. The lowpass audio filter is engineered as an integral part of the system. Designed into the Sidekick is a random noise generator and incidental AM noise meter.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2875.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**CRL**

The **SCA 300B Subcarrier Generator** is an advanced concept in SCA generation techniques. The frequency-locked digital design ensures superior carrier frequency stability, while providing linear modulation characteristics. It is designed to handle any type of data or audio application. Integral dual band audiolimiting provides consistent full modulation for music or voice applications. Precision non-overshooting filters ensure a clean spectral output, and provide for maximum protection of the main stereo sub-channel.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1650.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**MOSELEY**

The Moseley **SCG-8** is a Multiplex FM Subcarrier Generator with automatic muting and front panel peak-deviation meter, including self contained power supply. Available for operation at a specific frequency in the 26 kHz to 186 kHz spectrum.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$995.00**

**CALL FOR TODAY'S ALLIED PRICE**

The **SCD-8** is a Subcarrier Demodulator with automatic muting and front panel peak deviation meter, including a self contained power supply. Available for operation at a specific frequency in the 26 kHz to 186 kHz spectrum.



**MANUFACTURER'S SUGGESTED LIST PRICE.....\$995.00**

**CALL FOR TODAY'S ALLIED PRICE**

**JBL**

**JBL's 4400 Series** Studio Monitors achieve a new "truth" in sound with an extended high frequency response that remains effortlessly smooth through the critical 3,000 to 20,000 Hz range. And even extends beyond audibility to 27 kHz, reducing phase shift within the audible band for a more open and natural sound. The JBL 4400 Studio Monitor Series captures the full dynamic range, extended high frequency, and precise character of your sound as no other monitors in the business.



**MODELS:**

- 4406 \$189.00
- 4408 \$237.00
- 4410 \$375.00
- 4412 \$579.00

**CALL FOR THE ALLIED PRICE**





**ELECTROVOICE**

The **SENTRY 100A** monitor speaker system is a no-nonsense system that speaks to the needs of professionals with specific requirements. It offers high efficiency with extended low frequency response, high power capacity across the entire frequency range, uniform frequency response and dispersion, all in a compact no frills package. The SENTRY 100A features the SUPER-DOME™ tweeter capable of handling 25 watts of input power and an 8" direct radiator woofer.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$265.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **SENTRY 500** no-nonsense design meets the needs of professionals by combining high efficiency with extended low frequency response, high power capacity across the entire frequency range, uniform frequency response and constant directivity, all in a well thought-out attractive package. The SENTRY 500 employs the SUPER-DOME™ tweeter capable of handling 25 watts of input power and an 8" direct radiator woofer.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$520.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**"ALLIED CARRIES THE ENTIRE ELECTROVOICE LINE"**

**FOSTEX**



The **6301B** all purpose monitor is completely self-contained. The sound is delivered from a full-range speaker that's surprisingly flat and accurate. It is designed to handle the complex waveforms of complete songs. You get a frequency response of 80Hz-13kHz. The built-in 10-watt (RMS, into 8 ohms) amplifier will handle anything you feed it. A separate external speaker jack is also provided.

**MANUFACTURER'S SUGGESTED LIST PRICE....\$320.00/pr.**

**ALLIED PRICE \$ \_\_\_\_\_**

**TOA**



The **RS21M** is a compact speaker system incorporating a full range 5 inch cone speaker in a sealed enclosure of compact size. Featuring a high power capacity and smooth extended frequency response, the RS21M is ideally suited for recording studio monitoring.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$65.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## ALC

The **ANNOUNCER** full range loudspeaker is the ultimate in performance in a compact size. The wood cabinet is covered in walnut-grained vinyl and is perfectly square. As with all ALC loudspeakers, the grill snaps away and the system has an overall fuse. The high-compliance full range transducer produces quality sound from below 60 Hz to beyond 15 kHz.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$59.00**

**ALLIED PRICE \$ \_\_\_\_\_**

10302



The **MONITOR** loudspeaker system provides a flat response from below 50 Hz to beyond 20 kHz. Its high compliance surround on the 8" woofer and phenolic tweeter combine to enhance any type of music. The tweeter control and the system fuse are behind the snap-away grille. It will handle 25 watts RMS continuous, 45 watts integrated program material at 8 ohms.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$116.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**"ALLIED CARRIES THE FULL ALC LINE"**

20306



## WENGER

The **Model 1104 Reference Monitor** is designed for control room, studio, home or business. It features a three-way total cone system in close array, comprised of a 10" bass speaker (with a 2" voice coil and 40oz. magnet), a 5" midrange speaker, and two 1" soft dome tweeters. The key to the ALS® design is the patented, massively loaded passive radiator which radically reduces resonant peaks and low-frequency distortion.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$829.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**ALLIED has six (6) offices to serve the broadcast industry:  
Atlanta, Chicago, Dallas, Los Angeles, Richmond, IN & Seattle  
ALLIED has 800 numbers at all locations for your order entry.  
ALLIED has EZ LINK, TTY DDD, FAX, and TELEX for communication.  
ALLIED carries over 300 manufacturer product lines.  
ALLIED has Satellite, International, Canadian and Systems  
Divisions.  
ALLIED serves the broadcast world — may we serve you?**

## ANCHOR

The **AN-1400 Powered Speaker** with 50 watt (RMS) MOSFET Amplifier, mounts directly into Tektronix® side-by-side rack. Input; Balanced 600 ohm transformer (fem. XLR), front headphone jack, cast aluminum face plate, & metal grill. Shipping Size: 6" x 9" x 11" Shipping Wt.: 12 lbs.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$429.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## AURATONE

Recording/Broadcast standard **mixdown/comparative monitors** and **extension speakers**. Walnut woodgrain vinyl finish, black foam grille. The little powerhouse. They tell exactly what's going on.

**MANUFACTURER'S SUGGESTED LIST PRICE, PER PR..\$99**

**ALLIED PRICE \$ \_\_\_\_\_**



Model 5C

## — STANDBY POWER —

### TOPAZ

The **TOPAZ POWERMAKER Micro UPS™** provides standby power for microcomputers and microprocessor based volatile memory. The POWERMAKER is totally effective against blackouts, brownouts and sudden voltage dips that can shut you down, protects against noise transients and spikes. It responds in less than a half cycle. It provides a sine wave output for meeting the power requirements of even the most sensitive equipment.

The **TOPAZ POWER CONDITIONERS** combine the performance characteristics of a voltage regulator and a noise suppressor in one convenient unit. Available in single-phase with power rating from 2 kVA to 400 VA and numerous features.

**PRICES UPON APPLICATION**



### KAY

The **Phasemaster® T-Series Rotary Phase Converter** is specially designed and engineered for use with all types of radio transmitters for the conversion of single phase power to 3-phase in locations which are not serviced by 3-phase lines. A Phasemaster T-Series Rotary Phase Converter can be installed for a fraction of the cost of installing utility supplied 3-phase power. Also, for open Delta circuits.

**PRICES UPON APPLICATION**





## KOHLER


### FAST RESPONSE™ 180 KW to 275 KW

The most advanced generator design in the U.S. and on the international scene, KOHLER Fast-Response™ units have a combination of important performance advantages, including: 1. Exceptional motor starting; 2. Instant recovery from voltage transients; 3. Sustained short circuit protection.

In addition, Fast Response™ engine generators eliminate high frequency spikes thereby preventing disruption of telephone and electronic equipment.

| Model  | Standby Rating<br>60 Hz | Prime Rating<br>60Hz | Dimensions<br>L x W x H | Weight<br>Lbs. |
|--------|-------------------------|----------------------|-------------------------|----------------|
| 180ROZ | 180 KW                  | 180 KW               | 120x50x79¾"             | 5760           |
| 230ROZ | 230 KW                  | 205 KW               | 120x50x68¾"             | 5875           |
| 250ROZ | 250 KW                  | 225 KW               | 120x50x68½"             | 5990           |
| 275ROZ | 275 KW                  | 250 KW               | 120x50x68¾"             | 5990           |

Available voltages: 120/240 1 phase through 100 KW, 120/208 3 phase, 4 wire through 347/600 3 phase, 4 wire models.

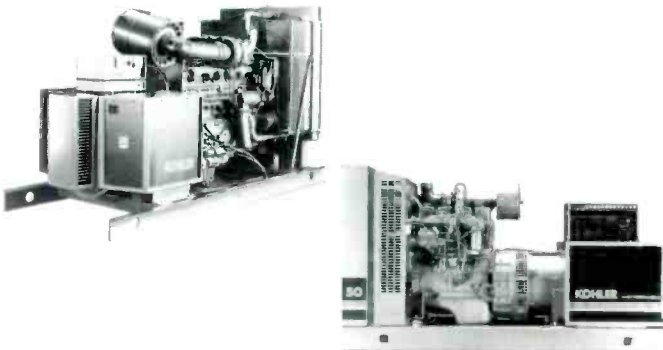

### FAST RESPONSE II™ 20 KW to 150 KW

The KOHLER Fast Response II™ Engine Generator System: More advanced features, more reliability in a leaner, more efficient package. Ideal for broadcast transmitters.

KOHLER Fast Response II™ systems represent a highly refined second generation of the patented Fast Response™ design, offering these standard performance features: Instant response to load change, sustained short circuit capability, superior motor starting performance. KOHLER Fast Response II™ is America's first engine generator system to incorporate the reliability and efficiency of advanced microcomputer logic. The KOHLER Microcomputer Decision Maker™ executes instructions in *microseconds* and is virtually immune to false input signals.

| Model  | Standby Rating<br>60 Hz | Prime Rating<br>60 Hz | Dimensions<br>L x W x H | Weight<br>Lbs. |
|--|-------------------------|-----------------------|-------------------------|----------------|
| <b>Fast Response II Liquid-Cooled Gas/Gasoline</b> |                         |                       |                         |                |
| 20RZ   | 20 KW                   | 18 KW                 | 72x29x43"               | 1142           |
| 30RZ   | 30 KW                   | 27.5 KW               | 84x29x45"               | 1360           |
| 45RZ   | 45 KW                   | 40 KW                 | 84x29x45"               | 1465           |
| 60RZ   | 60 KW                   | 54 KW                 | 88¼x34x44"              | 2009           |
| 70RZ   | 70 KW                   | 63 KW                 | 88¼x34x44"              | 2100           |
| 80RZ   | 80 KW                   | 72 KW                 | 88¼x34x46"              | 2400           |
| 100RZ  | 100 KW                  | 90 KW                 | 88¼x34x46"              | 2550           |
| <b>Fast Response II Liquid-Cooled Diesel</b>       |                         |                       |                         |                |
| 20ROZ  | 22 KW                   | 20 KW                 | 72x29x37.5"             | 1256           |
| 30ROZ  | 30KW                    | 27 KW                 | 78x29x45"               | 1440           |
| 40ROZ  | 37 KW                   | 34 KW                 | 78x29x45"               | 1449           |
| 50ROZ  | 50 KW                   | 46 KW                 | 78x29x45"               | 1514           |
| 60ROZ  | 60 KW                   | 54 KW                 | 88¼x29x44"              | 1875           |
| 80ROZ  | 80 KW                   | 72 KW                 | 88¼x29x44"              | 2065           |
| 100ROZ   | 100 KW                  | 90 KW                 | 88¼x29x44"              | 2150           |
| 125ROZ   | 125 KW                  | 112 KW                | 99x34x57½"              | 3900           |
| 150ROZ   | 150 KW                  | 135 KW                | 99x34x57½"              | 3950           |

Available voltages: 120/240 1 phase, 120/208 3 phase, 4 wire through 347/600 3 phase, 4 wire all models.

### TR-SERIES™ 300 KW to 1000 KW

Diesel power with your choice of cooling, fuel system and exhaust system options. All models in this series are equipped with KOHLER's Microcomputer Decision Maker controller for full monitoring instrumentation, automatic protection features, and a broad range of accessories.


Engines for this series are supplied by Cummins. All are turbocharged, and the majority are also after-cooled.

With isochronous governors as standard equipment, steady-state frequency regulation from no load to full load is plus or minus .25%.

NEMA class F insulation system with epoxy coating for moisture and abrasion resistance.

| Model   | Standby Rating<br>60 Hz | Prime Rating<br>60 Hz | Dimensions<br>L x W x H | Weight<br>Lbs. |
|---------|-------------------------|-----------------------|-------------------------|----------------|
| 300ROZ  | 300 KW                  | 275 KW                | 120²¹⁄₃₂x45½x70"        | 5525           |
| 350ROZ  | 350 KW                  | 325 KW                | 120²¹⁄₃₂x45½x70"        | 6650           |
| 400ROZ  | 400 KW                  | 335 KW                | 133x45½x79½"            | 9500           |
| 450ROZ  | 450 KW                  | 410 KW                | 142²⁄₃x59¹⁄₈x96²⁄₃"     | 11550          |
| 500ROZ  | 500 KW                  | 455 KW                | 145²⁄₃x59¹⁄₈x82²⁄₃"     | 11850          |
| 600ROZ  | 600 KW                  | 535 KW                | 145x62x87"              | 13465          |
| 750ROZ  | 750 KW                  | 675 KW                | 177x67x45"              | 18400          |
| 800ROZ  | 800 KW                  | 725 KW                | 177x67x95"              | 18400          |
| 1000ROZ | 1000 KW                 | 900 KW                | 213¹¹⁄₈x84x112"         | 21000          |

Available voltages: 120/208 3 phase, 4 wire through 347/600 3 phase, 4 wire

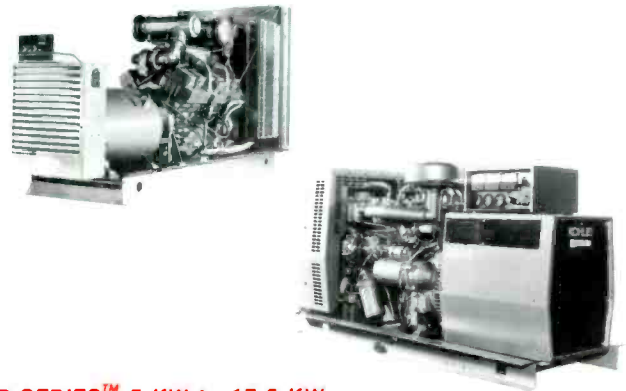

### R-SERIES™ 5 KW to 17.5 KW


R-Series™ generator sets above 10 KW provide many of the features of the Fast-Response models including voltage regulation with ± 2%, and a broad range of voltage combinations including 347/600. Voltages from 120/240 through 277/480 are field reconnectable. The exclusive KOHLER solid-state volts per-hertz regulator has three-phase sensing.

The standard controller is a relay model with a meter box option. An optional solid-state controller has a hospital lamp group to meet NFPA-76A.

| Model                                      | Standby Rating<br>60 Hz | Prime Rating<br>60 Hz | Dimensions<br>L x W x H | Weight<br>Lbs. |
|--|-------------------------|-----------------------|-------------------------|----------------|
| <b>R-Series Air-Cooled Gas/Gasoline</b>    |                         |                       |                         |                |
| 5RMY                                       | 5 KW                    |                       | 26½x18½x21¾"            | 234            |
| 7RMY                                       | 7 KW                    |                       | 28½x21¼x26½"            | 450            |
| 15RMY                                      | 15 KW                   |                       | 38¹⁄₈x21½x29²⁄₃"        | 696            |
| <b>R-Series Air-Cooled Diesel</b>          |                         |                       |                         |                |
| 5RMOY                                      | 5 KW                    | 5KW                   | 34x34¼x20"              | 547            |
| 10RMOY                                     | 10 KW                   | 10 KW                 | 46x26x41"               | 831            |
| 15RMOY                                     | 15 KW                   | 14 KW                 | 51x26x34½"              | 965            |
| <b>R-Series Liquid-Cooled Gas/Gasoline</b> |                         |                       |                         |                |
| 7.5R                                       | 7.5 KW                  |                       | 43¹⁄₈x19¹⁄₈x25½"        | 450            |
| <b>R-Series Liquid-Cooled Diesel</b>       |                         |                       |                         |                |
| 17.5ROY                                    | 17.5 KW                 | 15 KW                 | 61x26x34¹⁄₁₀"           | 940            |

Available voltages: 120/240 1 phase, 3 wire through 347/600 3 phase, 4 wire. Models 5RMOY, 5RMY, 7RMY and 7.5R are 120 volt or 120/240 volt, 1 phase.


**MOSELEY**

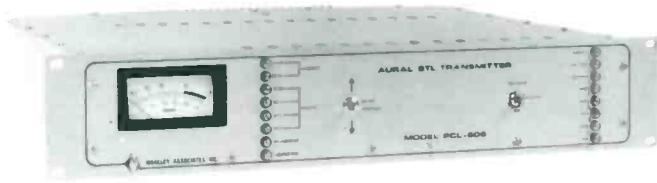

The **PCL-606** is an all solid-state STL consisting of a mono transmitter and receiver with self contained power supplies, crystals and tested on the operating frequency. Versions are available for all commonly used bands from 148 to 960 MHz. Discrete.

**MANUFACTURER'S SUGGESTED LIST PRICE...\$10,490.00**

**ALLIED PRICE \$ \_\_\_\_\_**

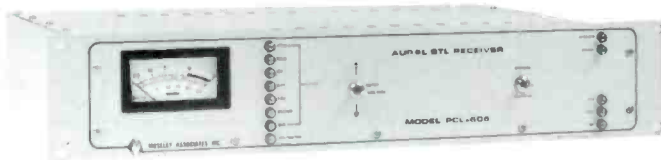

The **PCL-606/C** is an all solid-state Composite STL consisting of a transmitter and receiver with self-contained power supplies, crystals and tested on the operating frequency. Transmits a composite stereo waveform on a single STL. Versions available for all commonly used bands from 148 to 960 MHz.

**MANUFACTURER'S SUGGESTED LIST PRICE...\$10,490.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The monaural **PCL-600** and composite stereo **PCL-600/C** is the first truly cost-effective STL designed to operate in most RF environments with low distortion and low noise characteristics. The PCL-600's, used in the split channel method, can transmit right and left programs with no measurable crosstalk. The PCL-600/C has a wideband input that transmits the complete stereo waveform over a single STL. Both the PCL-600 and PCL-600/C can transmit two subcarrier frequencies for SCA and/or remote control as well as the program.

**PCL-600 .....\$6800.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**PCL-600/C .....\$5850.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **CL100-1** is a Telemetry Return Link consisting of an all solid-state transmitter and receiver. Tuned and tested on the operating frequency. Nominal one watt transmitter output. Receiver designed specifically for narrowband service. For 10F2/10F3 channels FCC group P.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$3980.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**TFT**



The **Model 8600/8601** is an economical, high-quality STL system which is specifically designed for either single channel or dual monaural channel radio broadcast applications. It is an ideal narrowband system which is optimized for operation in congested STL environments. The system is designed to deliver superlative audio quality without degradation or adjacent channel interference. The 8600 System incorporates the latest microwave components and LSI devices.

**Transmitter and Receiver.....\$3195.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**MARTI**



**Marti Electronics** has announced the availability of their new **UPS-12** uninterruptible power system. The DC-DC system provides automatic battery backup for Marti STL-10/R-10 radio link systems as well as Marti RPT-15/CR-10 automatic relay stations and TSL-15 data links. The UPS-12 is equipped with a precision constant voltage "Taper" battery charger to maintain a 24, 36 or 60 amp-hour sealed maintenance free battery in a charged condition.

**CALL FOR THE ALLIED PRICE**



**Marti's MW-500** Microwave Booster is designed to receive, amplify and re-direct an aural STL signal over or around an obstructing object in the direct path between the transmitting and receiving antennas. Since the booster uses the same frequency for re-transmitting, scarce spectrum is conserved. The booster will provide a maximum of 500 milliwatts output power. It will also provide 60 dB power gain at any point it is inserted in the microwave path.


**CALL FOR THE ALLIED PRICE**

The **Marti Studio-Transmitter Link/Intercity** relay is a line-of-sight FM communications system providing a high quality broadcast audio channel with two optional sub-channels. A dual link for stereo provides two identical broadcast quality channels with better than 60 dB stereo cross talk and four optional sub-channels. This system offers greater rejection of interference, superior noise performance, low channel cross talk, greater redundancy, and lower cost.

| Model      | Description   |           |
|------------|---|-----------|
| STL-10/950 | 10 watt transmitter, complete with crystal and tuned to frequency. 120/220VAC. for AM or FM broadcast application.                |           |
| R-10/950   | Receiver, complete with crystal and tuned to frequency, 120/220 VAC. for AM or FM broadcast application. Includes down-converter. |           |
| STL-10     | MONO SYSTEM, TYPICAL  | \$3190.00 |
| STL-10     | STEREO SYSTEM, TYPICAL  | \$6775.00 |



**MARTI STEREO STL (DUAL SYSTEM 800-960 MHz.)**

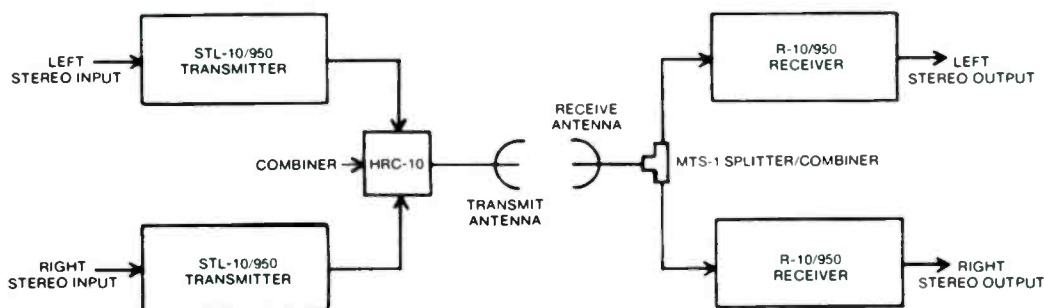


**STEREO SYSTEM SPECS.**  
800-960 MHz.  
500 KHz channel.

Stereo Channel Crosstalk/Separation -72 DB  
Noise (Left or Right Channel) -75 DB  
Frequency Response 20-15000 Hz ±0.25 DB  
Distortion (THD) 0.25%  
Type Emission 200 F9 Each  
Channel Spacing 250 KHz (±125 KHz offset)

Stereo systems available for new 200 KHz and 300 KHz bandwidths.



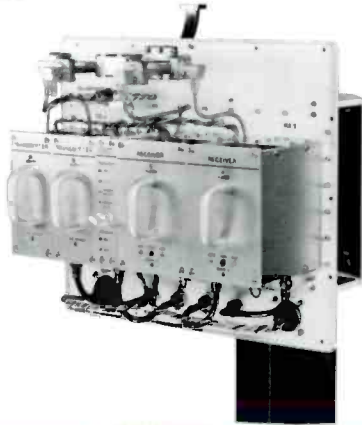

**HARRIS**

The **Harris Microstar™23** is the first 23 GHz video microwave radio to meet EIA RS-250B standards for television relay facilities for short-haul transmission. Microstar 23 is completely modular in design and can be configured for simplex or duplex operation in non-protected or hot standby modes, and is field-expandable. For hops up to 15 miles (depending on rain rate) the Microstar 23 offers the most cost-effective way to move information.

**CALL FOR THE ALLIED PRICE**

**MARTI**



**Marti's 23 GHz STL and Intercity Relay Links** are an excellent alternative to the 950 mHz systems for short hops, multi-hop links and links for urban use. The higher frequency in combination with much narrower beam width antenna allows the use of these systems where 950 mHz systems just cannot work because of lack of enough Fresnel clearance. Digital audio and multiple subcarriers available.

**MANUFACTURER'S SUGGESTED LIST PRICE..... start at \$5345.00**

**ALLIED PRICE \$ \_\_\_\_\_**


**M/A-COM**



The **M/A-COM 23VFM** system is a budget priced solid-state FM microwave link that provides reliable, short range digital audio links in the 21.8 to 22.0 GHz and 23.0 to 23.2 GHz frequency bands. With the addition of a digital processor(s), systems can be configured as Stereo Digital only, or, with optional subcarriers, Stereo Digital and up to two additional 15 kHz analog channels. Perfect for FM SCA audio, FM SCA data, or transmitter remote control.

**PRICES UPON APPLICATION**

**MARK PRODUCTS**



**Mark Products** offers a variety of sizes of Heli-Arc welded aluminum multi-element grid parabolas for point to point relay operation in the 400 to 2700 mHz frequency range. The patented grid of construction is lightweight, yet extremely strong. One of the outstanding advantages of the grid antenna is that it has wind loading characteristics of only 25 to 40% of comparable size solid parabolas.

**PRICES UPON APPLICATION**

**SCALA**



The **Scala PR-450-U™** is widely used in point to point communications and telemetry systems in the 350 to 1000 mHz spectrum. Paraflector™ performance approximates that of a parabolic dish of the same aperture, and is easier to assemble and install. The PR-450U offers rugged construction for reliable long-term service, even in severe environmental conditions.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$550.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**Wave goodbye to your old phone system and say hello to the**

# Telnox L-O

## **Broadcasting has a brand new beat!**

The **Telnox L-O** is another telephone system like the Rolls is another car. There's no question it can change the way you are presently using your telephone. This is because the Telnox L-O is more than a telephone system. It is a way of thinking. Your way.



What does this mean? It means the Telnox L-O hasn't been fancied up to "adapt" to broadcasting, it has been designed for it. Here's a system that finally tackles the unique demands of your industry head on.



The Telnox L-O comes from Normex. And it isn't just a clever package that has eliminated some of the usual problems of telephone broadcasting. It has been developed with exceptional features like; CONFERENCE ON AIR that can open up brand new programming vistas.

## **Close encounters**

With a feature like CONFERENCE ON AIR, you can rewrite the book on telephone programming. Because you now have the freedom to organize formats anytime, and

any way you want. You no longer have to go through an operator because the Telnox L-O can "assemble" up to 10 people to take part simultaneously in the same show.

This is the kind of flexibility that just used to be talked about. It's now a reality and can help you cash in on the spontaneity that is so vital to effective telephone broadcasting.



Yes, the Telnox L-O is state-of-the-art. And yes, it could easily replace each and every set you are presently using in your studios and control rooms. It also gives you the works. Access to features that used to be the preserve of big business systems only, including new ones like: AUTO-HOLD, VOCAL, AUTO-ON AIR, LINE LEVEL ADJUST, PRIORITY, HANDSFREE, BATTERY BACK-UP and many more.


The Telnox L-O may be ultra-sophisticated technology, but it couldn't be simpler to use. All its features are automatic and easily accessible and they've been packaged into an extremely compact, low-profile system that can accommodate up to 10 telephone lines and 8 consoles.

This is a system that was meant for the pressure and intensity of a studio environment. And when it comes to the price you have to pay for this terrific technology, you can be sure you can afford it.


## **A challenge all its own**

It was broadcasters who got us working on the Telnox L-O in the first place. The project became an inspired collaboration between radio and television engineers from the industry and Normex's electronic experts.

And the result was more than anyone had anticipated. A breakthrough, not just a new system. The Telnox L-O has eliminated the hassle and the headaches but that's not what broadcasters are excited about. At last, they have a system with potential. A system that's as creative as they are and can point the way to bright new broadcasting ideas.



## COMREX

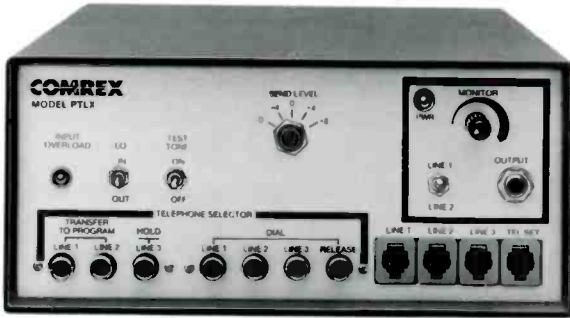

### PTLX: Portable Two-Line Encoder

For use with an external console, the PTLX contains all the features necessary to transmit 5 kHz over two dial or dedicated lines. There is built-in telephone interface for two program lines, with a third for communications. An optional road case is available.



### RTLX: Rack-Mount Two-Line Decoder

The RTLX is compatible with both PTLX and STLX encoders. For unattended operation, the RTLX may be used with TCB-2A Auto-Answer telephone couplers and the LX-L auto leveler, or with TCB-1A couplers where phones will be answered manually.



### STLX: Two-Line Encoder/Console

Ideal for reporting sports and news events, the STLX is a completely self-contained remote broadcast package. It incorporates a two-line encoder with noise suppression, as well as complete telephone interface for program and talkback. Other features include 4 mixing channels (2 mic/line), switchable AGC on all mic channels, 4 headphone channels for monitoring and intercom, PA feed out/external monitor in, and Penny & Giles® conductive plastic slide faders. Optional road case and battery pack are available.

## Frequency Extenders



### TH-1: Hybrid

Provides the same precision multi-frequency hybrid balance as our more expensive interfaces. Features include manual operation or automatic answering with calling party disconnect, remote relay for cart start, selectable ring count, de-clicking and A & A1 closure. All controls in a single half-rack with rack adaptor available.



### TH-2: Extender / Hybrid

Includes all the features of the Basic Hybrid, but adds automatic line leveling, and provides diverta-coupling for interface to any PABX. To complete this package, we've included a one-line frequency extender encoder and decoder.



### LX-R-plus decoder



### LX-T-plus encoder

The **Basic Extender** system was specifically designed for smaller-market stations. The LX-T encoder/LX-R decoder doesn't offer the extra features that some users find unnecessary. What it does offer is a distinct improvement in program quality sent over telephone lines at the lowest possible price. Optional rack adaptor available.



**COMREX**



**PLX II: Desk-Top One-Line Encoder**

Designed to operate from the output of a remote mixer, where program levels will be controlled by a mixer. It includes a built-in TCB-1A coupler, and features the same encoding circuitry as the PLX but without mic preamp and AGC.



**SLX: One-Line Encoder/Console**

Similar to the STLX, the SLX is a complete, self-contained remote broadcast package but with the single-line encoder.



**PLX: Portable One-Line Encoder**

This "stand-alone" encoder is designed for use in the field. Mic and tape inputs are provided, and the mic ducks the tape so that live "wrap-arounds" may be added to taped report. The built-in AGC system features a peak limiter with program controlled release time. It can operate from its internal batteries, or from one of Comrex's AC power supplies.


**TLX: Rack-Mount One-Line Encoder**

A single-line encoder for fixed installations (master control, ENG vans, network distribution points, etc.) the TLX accepts the output of a studio console and feeds either dial or dedicated circuits. A dial telephone line may be connected to the TLX with one of Comrex's telephone couplers.



**PLX: Micro Encoder**

This is the one-line encoder for news. It's battery operated, and small enough to fit easily in a briefcase or attach to a portable cellular telephone. It features a built-in telephone coupler monitor jack for handsfree operation.

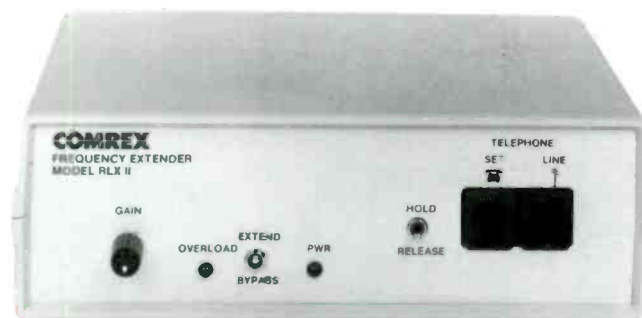

**RLX II: Desk-Top One-Line Decoder**

This desk-top decoder features a built-in TCB-1A coupler for easy connection to the telephone line, and may be used as a general-purpose telephone coupler for unencoded input as well as encoded feeds.



**RLX: Rack-Mount One-Line Decoder**

The RLX rack-mount decoder includes input gain (adjustable on the front panel), and an LED overload indicator which monitors input drive level. It requires an external coupler such as the TCB-1A or TCB-2A to hold the telephone line.

**ALLIED CARRIES THE  
ENTIRE COMREX LINE**

**CALL FOR THE ALLIED  
PRICE TODAY**

**SYMETRIX**



The **Model 104 Multi-Line Interface** and **Model 108 Broadcast Telephone System** can connect your audio console directly to incoming phone lines and both are fully stand-alone systems, designed to bridge the gap between bi-directional telephone lines and uni-directional audio mixing consoles. Both are equipped with electronic hybrids which provide full duplex conversation between host and callers. In conjunction with the hybrid, a sophisticated AGC (Automatic Gain Control) assures that each caller comes through loud and clear. Both the 104 and 108 systems are operated from small (8 x 10 inch) desk consoles.

**MFR'S SUGGESTED LIST PRICE Model 104.....\$1695.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**MFR'S SUGGESTED LIST PRICE Model 108.....\$2995.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **Symetrix TI-101** is a console-to-telephone interface for talk show, ENG, production and a host of other applications.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$495.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**TELEMIX X**

*As easy as pressing a button . . .*

Your operators and on-air talent will love the easy operation of Gentner's TELEMIX X system! At the push of a button, TELEMIX X takes one of up to 18 telephone lines and interfaces it to your equipment.


TELEMIX X operates much like a ten-button telephone set. To take a line, your operator pushes the appropriate line button. To place the call on hold, the HOLD button is depressed; to drop the call, the OFF button is pushed. Depression of the CONF button allows multiline conferencing. The DUMP button provides connection to an external delay system.

**Configure your own telephone system with TELEMIX X!**

TELEMIX X incorporates a modular design to give you the benefits of your own custom on-air telephone system with off-the-shelf delivery. The block diagram shows the main components of the system.



**TELEMIX X's modular design lets you configure your own custom telephone system . . . with off-the-shelf delivery!**

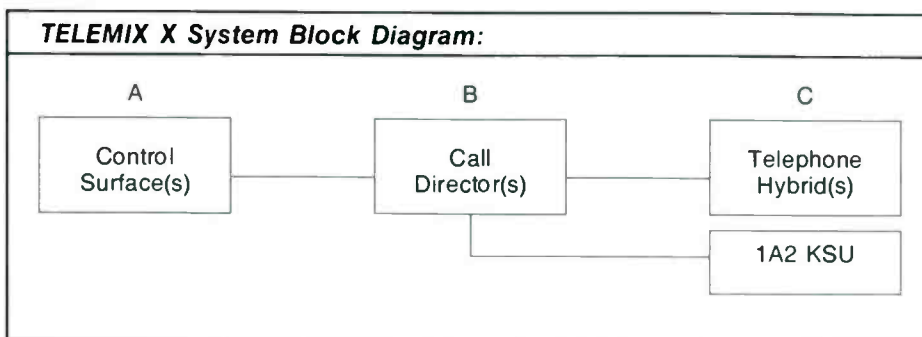


**TELEMIX X  
CALL DIRECTOR  
&  
CONTROL SURFACES**  
sold exclusively by:



**AUDIOMETRICS**

The **DTD-5** is a dialtone/busy detector for use in those telephone systems which do not provide momentary open/battery reversal, the actions necessary to implement the ELGIN 20721 "Listen Line." As the caller finishes listening to the message on the "Listen Line" and hangs up, the DTD-5 detects the dialtone, or "off the hook" sounds and sends a command to the "Listen Line" to release the line, ready for next call. DTD-5 requires no external power supply, but retrofits into the 20721 and takes its power from the host unit.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$109.17**  
**ALLIED PRICE \$ \_\_\_\_\_**

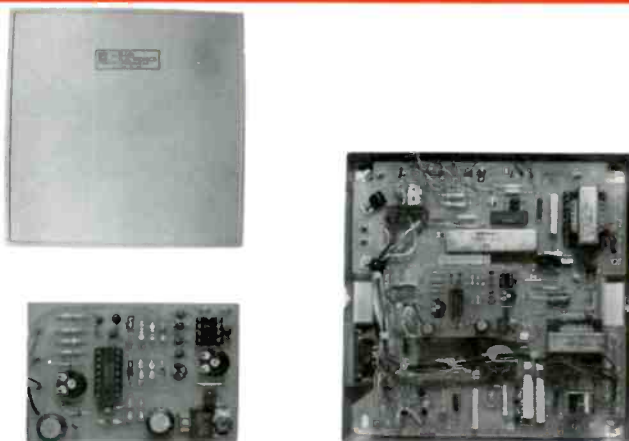

**GENTNER**

The **TC-100B** is the most versatile telephone coupler you'll find. The design not only gives you auto-answer/auto-disconnect and latching or momentary tape starts; it allows you to use the unit as a hybrid for on-air calls . . . as a remote controller, and private party line telephone intercom. Easy to install and operate.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$399.00**  
**ALLIED PRICE \$ \_\_\_\_\_**



The **GENTNER SPH-3A** provides an easy and inexpensive method of interfacing broadcast equipment with an existing telephone system. Separate adjustable volume control of caller audio and monitor audio is featured, plus one-time adjustment of null and feed to caller.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$549.00**  
**ALLIED PRICE \$ \_\_\_\_\_**




From GENTNER, the **SPH-4** is a self-contained telephone interface system designed to provide clean, clear phone audio for a variety of uses. Incorporates one-time set controls of audio volume to caller (with LED level indication) squelch, hybrid null as well as separate volume controls for caller level and monitor. An exclusive feature is the caller control.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$769.00**  
**ALLIED PRICE \$ \_\_\_\_\_**



Gentner's **EFT-900** makes your remotes easy and inexpensive. The unit gives you the convenience of a standard telephone line, with better quality than you thought possible from the dial-up circuit. The EFT-900 improves telephone audio quality by recovering 2½ octaves of low-end frequency response. The unit's SHARP filters reduce line noise while Aphex® processing regenerates higher frequencies above 3 kHz. Easy to hook up and easy to use.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$939.00**  
**ALLIED PRICE \$ \_\_\_\_\_**

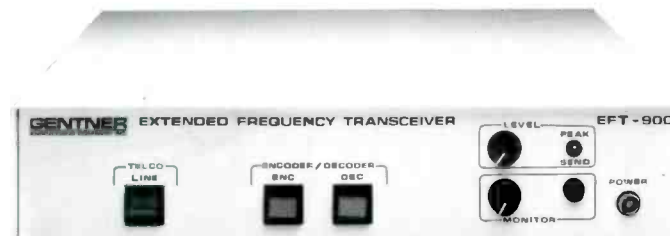

The **EFT-1000 Extended Frequency Transceiver** improves the sound of your telephone. Audio frequencies are shifted up by 250 Hz on the transmitting end and back down on the receiving end. This dramatically improves the quality of the broadcast. It is a complete, self-contained transceiver that is able to transmit, receive, or operate full duplex as a transceiver. This allows you to run your remote broadcasts with a single telephone line! Designed for easy hook-up and simple operation it is able to enter or exit the encode/decode mode and couple to the telephone line automatically.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1599.00**  
**ALLIED PRICE \$ \_\_\_\_\_**





**GENTNER**



Gentner's new **TELEPROCESSOR** improves the sound of any telephone system. Use in conjunction with telephone hybrids, frequency extenders or other interface equipment to enhance your telephone audio. Features: Maintains average send level to caller, has Aphex® Processing, Lo and Hi band EQ adjustments and easy to install.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$499.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**TELLABS**

The **TELLABS** line of equalization equipment was designed expressly for use with telephone circuits. No other form of equalization can offer the flexibility or specs necessary to achieve the quality for AM and/or FM (stereo) feeds via leased telephone circuits. Bell standard for this application.

If a circuit is unloaded and if the length vs. gauge criterion is not exceeded, you can install your own equalization and pay for it in a very short time. The only alternative is to pay the telephone company a monthly fee for the same equipment. If telephone circuit lines are a necessity in your operation, there's no reason for you to also pay for the equalization on a monthly basis.

All TELLABS equipment is connected via the wire wrap method and all cabinets must be wired for application by the user. Wrap terminals .075".



A typical mono application would consist of:

- (1) #4425 repeat coil card
- (1) #1911 single card repeat coil housing
- (1) #1912 housing for equalizer module\*
- (1) #4008 equalizer module
- (1) #1913-L4 power transformer

A typical stereo application would consist of:

- (1) #4425 dual repeat coil card
- (1) #1911 single card repeat coil housing
- (1) #1913 dual housing for 2 equalizer modules\*
- (2) #4008 equalizer modules
- (1) #1913-L4 power transformer


\* (RF at the receive end may necessitate a 248RF cabinet which is designed with suppression and bypassing especially for use in RF-intense applications.)

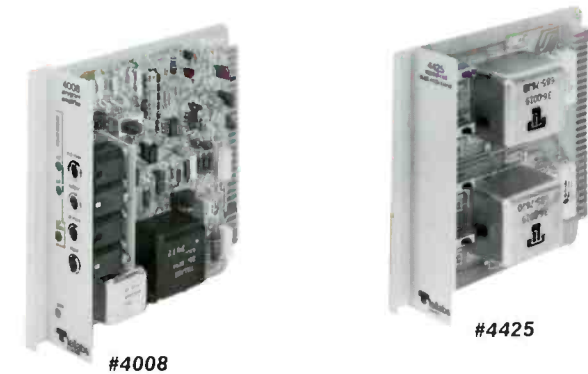

1988 EDITION

**TELEPHONE LINE EQUALIZATION**

TYPICAL ARRANGEMENT TO UPGRADE ANY LOOP WHICH MEETS INDICATED CRITERIA



Up to 30 dB loss differential 50-15 kHz  
(22 ga. cable typically 5.9 ml. max @ 15 kHz)

UP TO 3 UNITS MAY BE CASCADED AT APPROX. 5 MI. INTERVALS WITH MAINTENANCE OF ACCEPTABLE NOISE & DISTORTION SPECS (RE 22 GA. CABLE)

TYPICAL EQUALIZATION LIMITS — 15 kHz

| CABLE GA. | MAX. LENGTH |
|-----------|-------------|
| 19        | 8.7 ml.     |
| 22        | 5.9 ml.     |
| 24        | 4.2 ml.     |
| 26        | 3.4 ml.     |

|          |                                     |     |          |
|----------|-------------------------------------|-----|----------|
| #4008    | EQ. Module.....                     | 210 | \$202.00 |
| #4425    | Repeat Coil/Dual.....               | 100 | \$95.00  |
| #1913    | Dual Card Housing.....              |     | \$65.00  |
| #1911    | Single Card Housing.....            | 30  | \$10.00  |
| #1913-L4 | Transformer.....                    | 75  | \$9.00   |
| #248RF   | Dual Amp Mounting, RF Shielded..... |     | \$368.00 |
| #248C    | Housing.....                        |     | \$363.00 |
| #8003A   | Power Supply.....                   |     | \$173.00 |
| #1012    | Housing.....                        |     | \$100.00 |

**ELGIN**



The **EC30A** is a totally passive voice coupler that's also known as the "QKT." Total protection is afforded to the phone company's circuits by installation of the EC30A. ELGIN was the original manufacturer for the Bell "QKT."

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$52.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**ELGIN**

The **19645 RCZ** recorder connector provides interface between the telephone and/or multi-line key pad and the input to your audio equipment. It amplifies both sides of conversation but isn't designed for sending audio back. It requires the optional 2012B transformer for power, and connections are made via a barrier strip. An RJ-35X jack is required for multi-line access.

| Model   | Description             |          |
|---------|-------------------------|----------|
| 19645-4 | Recorder connector..... | \$208.00 |
| 2012B   | Transformer.....        | \$20.00  |

ALLIED PRICE \$ \_\_\_\_\_



Also known as the "listen line", the **20721** is expressly for use as an automatic answer device. It will automatically connect your mass feed to a network station simply by having the station call the number assigned to it. The 20721 must see a battery reversal or momentary open from the originating city. Absence of both of these functions will not permit its use. Use of the DTD-5 is recommended to alleviate this. The DTD-5 can be retrofitted into the 20721 case and needs no external power source. Multi-connector DA19603403-51225-1 plug and hood assembly and telco jack RJ-11W or RJ-32X are required.

| Model            | Description               |          |
|------------------|---------------------------|----------|
| 20721-1          | Coupler.....              | \$237.00 |
| DTD-5            | Line release.....         | \$109.17 |
| DA19603403-51225 | Multi-pin connectors..... | \$12.00  |

ALLIED PRICE \$ \_\_\_\_\_



**INTERALIA**

The "**VOICE**" is a low cost, two message - two line solid state announcer. It is equipped with 64 total seconds of digital storage and features a system operating battery back-up. The "VOICE" interfaces easily with all major PBX's and direct lines through 2 RJ11 modular connectors, one for each telephone line. Time available per line (up to a maximum of 64 seconds) is at user's option. Intermedia offers a full line of digital announcers:

|                                  |           |
|----------------------------------|-----------|
| The Voice (V-2B).....            | \$695.00  |
| Single Message Unit (SMU).....   | \$1170.00 |
| Dual Message Unit (DMU).....     | \$1790.00 |
| Multi-Message Unit (MMU-II)..... | \$3860.00 |
| Multi-Line Unit (MLU).....       | \$7880.00 |
| Multi-Line Unit-II (MLU-II)..... | \$7880.00 |

CALL FOR THE ALLIED PRICE



**ARIS**


**ARIS Audichron Recorded Information System** is designed for all single channel announcement needs in your CPE or CO environment. ARIS gives you big system features for only "Pennies Per Second." ARIS provides one full minute of digital voice storage, start/stop or continuous operation, battery back-up and up to 250 trunk capacity. Announcements up to one minute will sound great on this solid state, high quality digital system. Whether you record locally from a standard handset or tape recorder or add the optional remote record feature, the announcement cycle will adjust exactly to your message length. An extra feature is an optional plug-in board providing 2 wire ring seizure/remote record with security code access.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$875.00

ALLIED PRICE \$ \_\_\_\_\_



## POTOMAC

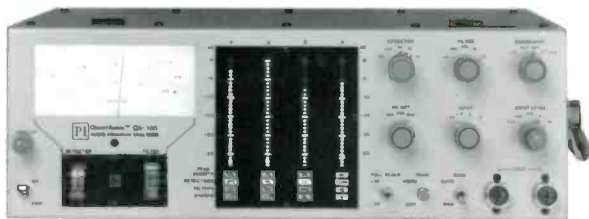

The Potomac "QuantAural" QA 100 is an audio program analyzer for evaluating your own station's sound, competitive stations' sound and measuring audio processing from numerous sources. This instrument is designed especially for professional broadcast sound analysis. You can now measure maximum peak level, audio processing effectiveness, tightness of sound, tonal balance and consistency, stereo bandwidth, preemphasis and "punch." This portable unit utilizes meter and LED readouts.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$3500.00**

**ALLIED PRICE \$ \_\_\_\_\_**



Designed primarily for commercial broadcast proof-of-performance measurements and equipment maintenance. The **AG-51 Audio Generator** and **AA-51 Audio Analyzer** are packaged separately for remote measurements requiring physical separation of signal source and signal analyzer. Both units are RFI shielded to enable accurate measurements in high level radio frequency environments. The AT-51 measures harmonic distortion, intermodulation distortion, volts, dB, signal to noise ratio, wow and flutter, stereo phasing, and differential gain in stereo channels.

### Model Description

**AT-51 Complete system including AA-51 and AG-51.....\$3775.00** **ALLIED PRICE \$ \_\_\_\_\_**

**IX-51 Optional balancing transformer (ea.).....\$195.00** **ALLIED PRICE \$ \_\_\_\_\_**

**POTOMAC PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

## DIGIMAX



The **Digimax Digital Frequency Counter** meets or exceeds all FCC requirements. D-1200

### SPECIFICATIONS

- FREQUENCY RANGE:** 20 Hz - 1.0 GHz
- ACCURACY OVER TEMPERATURE:** 0.1 PPM (+55 to 85 degrees F) proportional 10 MHz oven
- READOUTS:** Full 9 digits
- SENSITIVITY:** 5 to 50 mV from 50 Hz to 25 MHz  
15 to 50 mV from 25 MHz to 450 MHz  
50 to 75 mV at 1 GHz
- ACCURACY:** ±.1 Hz at 1 MHz  
±1 Hz at 10 MHz  
±100 Hz at 1 GHz
- POWER REQUIREMENTS:** AC-12 required for 110VAC, 8-15VDC at 500 ma.

Package includes AC adapter, rechargeable battery pack and antenna.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$352.00**


**ALLIED PRICE \$ \_\_\_\_\_**



The **Digimax LCD-1000** is a 1 GHz frequency counter with LED resolution and .0001% accuracy. It has VHF-UHF sensitivity. Comes with Ni-Cad battery and AC adapter.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$189.00**

**ALLIED PRICE \$ \_\_\_\_\_**

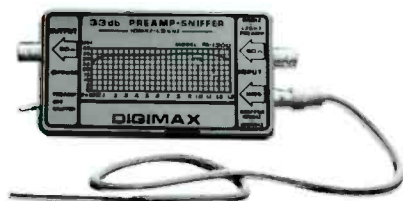

The **Digimax PA1300** is a 33 dB preamp sniffer with a frequency range of 10 MHz to 1.3 GHz. Comes with sniffer probe and AD adapter.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$89.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## TEKTRONIX


With the **2235** and **2236 Oscilloscopes**, Tektronix takes the high-value high-performance design concept of the 2200 Series even further. Both scopes feature a low price made possible by the 2200 Series' innovative, reduced-component architecture. (Yet both scopes offer advances in performance, operational simplicity and — not least — in solid reliability. All backed by the industry's first three-year warranty on all parts and labor, including the CRT.) The 2236 introduces a new concept in waveform measurement: a counter/timer/DMM, integrated into the scope's vertical, horizontal and trigger systems. Its capabilities simplify set-up, heighten measurement confidence and expand scope versatility in innumerable ways. The scope and DMM also can be applied simultaneously, with concurrent CRT and digital readout displays. DMM auto ranging simplifies set-up. An ohm-meter range of  $2G\Omega$  — a hundred times the range of most such devices — lets the technician quickly pinpoint even small amounts of transformer leakage. The 2235 ensures measurement quality and reliability while reducing instrument cost.

**MANUFACTURER'S SUGGESTED LIST PRICE...2235.....\$1575.00**



**MANUFACTURER'S SUGGESTED LIST PRICE...2236.....\$2795.00**

**ALLIED PRICE \$ \_\_\_\_\_**

2235

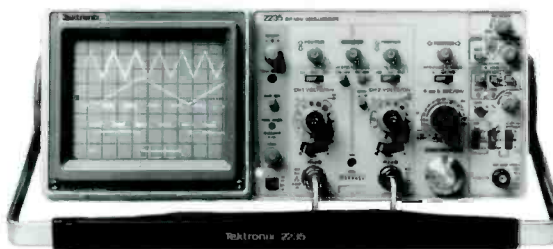

2236

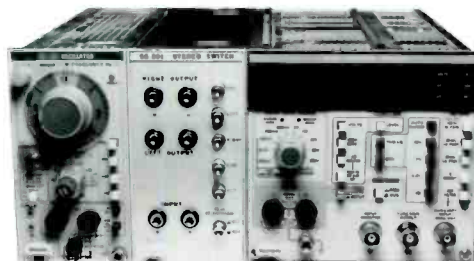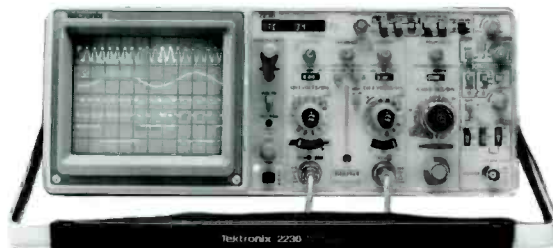

Used together, the **AA 501 Distortion Analyzer** and **SG 505 Oscillator** provide the *automatic* solution to your distortion measurement needs. The AA 501 is so automatic that no level setting, tuning or nulling is necessary.

An optional package would be the SG 505 option 2 audio oscillator (balanced, +28 dBm, multi-impedance) and AA 501 option 1 distortion analyzer (level, THD, plus multi impedance) in the TM503 mainframe. Since the instruments are plug-in modules, a split-site station could mount the RTM 506 rackmount at the transmitter and either carry both instruments in the more portable TM 503 when testing individual items of equipment, or plug the analyzer into the rackmount and take the oscillator in the TM 503 to the studio for full system proofs.


The AA 501 and SG 505 combination permits harmonic distortion, intermodulation distortion, frequency response, gain/loss, and signal-to-noise measurements to be accomplished with minimal operator skill. At the same time, both instruments feature state-of-the-art performance in residual noise and distortion.

Total system harmonic distortion plus noise is .0025%. Oscillator distortion is .0008% (THD). Analyzer residual noise level is less than 3 microvolts. The AA 501 offers a novel analog-like "bar graph" plus complete digital readout, it reads true RMS or average response in all modes.

Today's best tested noise and distortion generator/analyzer has a new enhancement. The Technoquest® matrix switcher facilitates testing with the Tektronix® AA501 & 56-505 combo. Pre-emphasis in or out . . . isolated left and right channels . . . L + R . . . L - R. No Tektronix® system should be without it.

**SG505 OSCILLATOR W/OPTION 2.....\$1620.00**  
**AA501A DISTORTION ANALYZER.....\$2525.00**  
**SS501 TECHNOQUEST SWITCH.....\$249.00**

**ALLIED PRICE \$ \_\_\_\_\_**

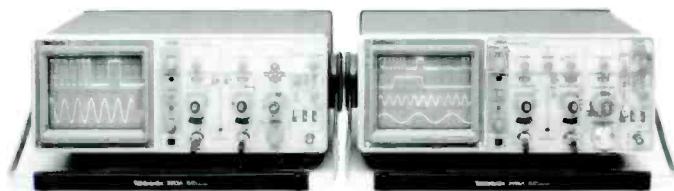

With the **2213A** and **2215A Oscilloscopes**, Tektronix continues a winning tradition: low cost value for performance that's best in its class. All backed by the industry's first 3-year warranty.

The new 60 MHz 2213A/2215A offer significant enhancements over the older 2213/2215. You'll see brighter, crisper displays, thanks to reduced trace noise and to an increased accelerating potential of 14 kV. A 10 MHz bandwidth limit switch has been added to the 2213A/2215A, allowing crisper traces and cleaner triggering in noisy environments. Both scopes feature full-size, 8 x 10 cm CRT's with camera bezel for easy viewing and photography.

The 2213A/2215A now offer improved trigger sensitivity to .3 div at 5 MHz (10 MHz for the 2235), for easy triggering and increased measurement confidence in everything from measuring power supplies to transistor noise. Using their single sweep trigger function, now standard on 2200 Series scopes, you can set up your scope to babysit signals, triggering only when a specified transient occurs. Single sweep trigger also provides an excellent way to set up your scope for photographing infrequent signals.

An improved delayed sweep allows you to make measurements with less jitter and more confidence: with a single time base in the 2213A; and with two time bases and alternate sweep switching in the 2215A.

**2213A Oscilloscope....\$1375.00 • 2215A Oscilloscope....\$1675.00**

**TEKTRONIX PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE**

**McCURDY**



The **SA14023 Extended Range Audio Level Meter** is a self contained instrument designed for the measurement of peak and average audio system transmission levels in dBm.

The **PPM 903A Peak Program Meter** is designed for peak audio level measurement in a wide range of broadcast and professional applications. The PPM provides a much more accurate representation of the maximum audio level present than would a VU meter.

**PRICES UPON APPLICATION**

**STL**



**STL Test Tapes** are recorded directly from precision generating equipment to provide the most accurate reference possible. An independent standards laboratory, STL provides a completely objective service, with test tapes available to major manufacturers, governments, and all who need a precision reference tool.

**STL TAPE SALES ARE FINAL  
PRICES UPON APPLICATION**

**DENON**



This compact disc (**CD**) contains a large number of test signals and musical excerpts which can be used not only to thoroughly check the playback performance of a CD player but to evaluate other audio components such as amplifiers, tape decks, loudspeakers, etc. It can further be used to measure the acoustic properties of a listening room and to carry out comparative listening tests.

**DENON CD PRICE.....\$25.00**

**GOLD LINE**



The **Gold Line Digital Model 30 Real Time Analyzer** uses microprocessor technology allowing extreme accuracy and stability and incorporates a pseudo randomly generated pink noise source. This stable display of equal energy across the entire audio spectrum makes equalization adjustments far easier.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2150.00**

**ALLIED PRICE \$ \_\_\_\_\_**



The **Gold Line TS-1** provides a combination of three precision test instruments. Capable of making audio frequency tests and measurements quickly with a high degree of accuracy. The TS-1 features a current controlled, state-variable oscillator. Distortion components are typically 0.1%. Full frequency sweeps can be made from 20 Hz to 20 kHz in a single range. The frequency counter is internally connected to the oscillator until a signal is plugged into the meter input. It then displays the frequency of the input signal. The TS-1 dB meter is a wideband, average responding AC voltmeter. The output of this meter circuit is electronically converted to decibels for display. A reference level for "0 dB" is factory set for 0.775 v which can be user adjusted  $\pm 10$  dB.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$299.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## ANDREW

For more than 40 years, **Andrew** has offered a comprehensive line of broadcast products. These include both foam and air dielectric HELIAX™ flexible coaxial cables, rigid line components, pressurization equipment and installation accessories. Detailed information on the Andrew line of products is available upon request. ALLIED CARRIES THE COMPLETE ANDREW LINE.

**PRICES UPON APPLICATION**



## MCI

**Micro Communications Incorporated** offers a wide range of products and services for the broadcast industry. The MCI product line includes complete RF systems, rectangular and circular waveguide transmission line systems, VHF, UHF, LPTV, MDS and ITFS combiners, multi-channel TV and FM combiners, VHF, UHF, LPTV, FM, MDS and ITFS diplexers, filters, directional couplers, loads, hybrids and switching systems.


**PRICES UPON APPLICATION**



## COMARK

**Comark Patch Panels** are available in all standard transmission line sizes in three, four, five and seven port standard configurations. The patch link construction allows the patch link to self align with the panel ports for ease of operation.

**PRICES UPON APPLICATION**



Low VSWR and low insertion loss combined with maximum isolation make **Comark Coaxial Switches** the ideal instrument for routing RF, especially in remote control applications. The positive action switching solenoid may be remotely controlled or overridden manually.

**PRICES UPON APPLICATION**



## DELTA

The **Delta 6700 Series** of Coaxial Transfer Switches provides the engineer with the capability to switch between transmitters, antennas, or dummy loads with a minimum of off-the-air time. Both models can be operated by remote control or manually. Remote operation can be achieved using either 120V or 220/240V, 50/60 Hz. The transfer switch is fully interlocked with two isolated interlock circuits that duplicate the RF path exactly. The 6730/6732E is a 1-5/8 inch switch. The 6740B/6742B is a 3-1/8 inch switch and may be pressurized up to 16 lb./sq. in. A gas barrier is built into each terminal, and an air inlet port is also provided in the 6740B/6742B model.

**PRICES UPON APPLICATION**



6740B



6730E






## CABLEWAVE

**Cablewave Systems Semi-flexible Coaxial Cables** are used in electronics and communications systems operating from VLF through the microwave frequency bands. Since each basic cable construction offers specific advantages, the company manufactures both smooth wall aluminum and corrugated copper coaxial cables in foam and air dielectric. This allows the user engineer to consider technical and economic factors for each type, and select the best construction for his requirements. Cables are cut to length and connectors factory attached upon request. ALLIED CARRIES THE COMPLETE CABLEWAVE LINE, INCLUDING CONNECTORS.

PRICES UPON APPLICATION

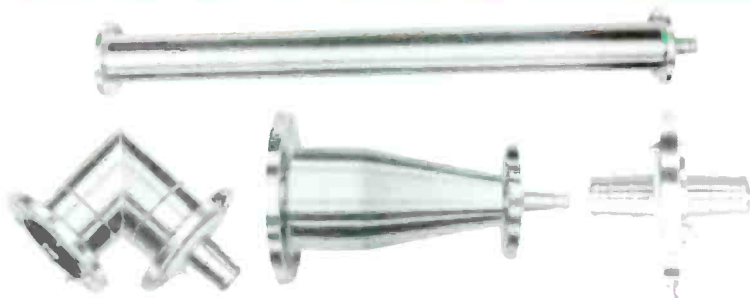

## CELWAVE

**Celwave Coaxial Transmission Line** is fabricated from high conductivity hard-drawn copper tubing with precision machined, pin-type, Teflon dielectric insulators. The standard 50 ohm line is offered in sizes from 7/8" through 6 1/8". The EIA bolt type flanges and inner connectors are compatible with EIA standards, US MIL specifications, and international IEC recommendations. Aluminum outer conductor 50 ohm and copper 75 ohm lines are available on special order.

PRICES UPON APPLICATION



## ALLIED

Prefabricated N to N cables cost less than your labor and materials. **Allied Jumper Cables** feature RG-213U coaxial cable, N-Male connectors with shrink-tube weatherproofing. Special lengths available on request. 7.8 dB loss per 100 feet at 900 MHz.

| Model    | Length |         |
|----------|--------|---------|
| 213NN-2  | 2 ft.  | \$10.00 |
| 213NN-12 | 12 ft. | \$13.85 |
| 213NN-15 | 15 ft. | \$14.39 |

OTHER LENGTHS UPON APPLICATION



## COMARK

**Comark Rigid Coaxial Transmission Line** provides outstanding features such as constant impedance, high power capacity, and low insertion loss. Sizes to 8 3/16" Heliarc-welded flanges and wrist band bullet construction 3 1/8" and above.

PRICES UPON APPLICATION

## HARRIS — AM TRANSMITTING EQUIPMENT —



SX-1A



MW-10B



DX-10

Harris' all-solid-state **SX Line of AM Transmitters** has been engineered to offer broadcasters significant benefits. Not only does the solid state design afford high reliability, but it promotes exceptional typical operating efficiency for reduced AC power costs. Harris-patented polyphase PDM (pulse duration modulation) provides top audio performance and low harmonic and intermodulation distortion. The SX line is designed for stereo operation, and is available with another Harris exclusive — the **Sunwatch™** option, which automatically executes PSA/Daytime/PPSA schedules. SX line power levels in 1 kW, 2.5 kW, and 5 kW — also available in dual configurations.

Harris' **MW-100**, 10,000 watt AM transmitter is designed for low cost-of-ownership, and is engineered with only two long-life tubes; high modulator and PA efficiency for low power consumption and Harris' POM system. Automatic modulation tracking minimizes operator adjustments, and the transmitter yields maximum modulation capability with no significant overshoot. The **MW-50C3**, 50,000 watt medium wave transmitter, Powerstar™, is available to address the high power broadcaster's need.

The **DX-10**, 10kW AM transmitter, introduced at N.A.B. 1987, is the world's first and only transmitter to feature Harris' exclusive digital amplitude modulation. The all-solid-state design translates into new performance levels, including exceptional signal clarity from low harmonic and intermodulation distortion with essentially no audio overshoot, tilt or ringing. A typical AC to RF efficiency of 80 percent affords substantial power cost savings over older 10kW transmitters now in use.

The Harris **STX-1B AM Stereo Exciter** generates the C-Quam® AM stereo signal to convert AM transmitters to stereo operation. The STX-1B's solid-state "transformerless" input stage provides excellent transient response for faithful transmission of today's dynamic program materials, and a stereo audio peak limiter maintains legal stereo modulation levels. The patented correction circuit optimizes a separation. A day/night operational mode is provided for stations switching power and/or antenna patterns.



**ALL PRICES UPON APPLICATION**

## HARRIS — FM TRANSMITTING EQUIPMENT —



FM-5K1



FM-25K1

Harris' **FM-5K1 FM Transmitter** can provide output power from 1,500 to 5,000 watts, allowing broadcasters to select the most effective antenna size, tower height and transmission line to meet their coverage objectives. Designed for single phase AC power service, the transmitter eliminates the need for more costly three phase service. Automatic power control minimizes the need for operator adjustment, and automatic VSWR foldback keeps the transmitter safely on the air in icing conditions. Harris' exclusive Flexpatch™ permits the transmitter to stay on the air at reduced power should a stage failure occur.

The new **FM-25K1 FM Transmitter** is designed to give maximum reliability and signal clarity with minimal operator intervention. Engineered for broad systems application, the FM-25K1 has an output power range of seven to 25kW. Other features include a single tube design and solid state 150 watt RF preamp and 600 watt IPA for maximum reliability. Harris' MX-15 Exciter and typical 2.8 MHz system bandwidth provide maximum signal clarity; automatic power control and VSWR foldback minimize operator adjustments and Harris' exclusive Flexpatch™ enables continued on-air emergency operation. Available in dual configuration: FM 50K1, 50kW.

Harris GM Transmitters also include: FM-1K, 1kW; FM-3.5K, 800-4,000 Watt; FM-10K; FM-20K, 20kW (available in dual configuration: FM-40K, 40kW; and FM-35-K, 35kW.



The Harris **FM-100K**, designed for the low power class D educational broadcaster, is available in two separate configurations — as a complete transmitter or as a stand-alone 100 watt amplifier. The standard FM-100K incorporates the solid-state 100 watt broadband amplifier with Harris' MX-15 exciter. Easy-to-read control and status indicators aid operation and service.



The Harris **MX-15 Exciter** provides the FM broadcaster with high levels of excellence in FM performance. The ultra-linear VCO yields -80dB FM S/N and .02% inter-modulation distortion for maximum signal clarity. The Digitally Synthesized Modulation stereo generator provides 50 dB minimum for increased stereo realism, and the patented Dynamic Transient Response stereo generator filter maximizes modulation level without over modulating. The MX-15 is available as an FCC type accepted 15 watt transmitter.



## MOTOROLA

In the **MOTOROLA C-QUAM AM STEREO SYSTEM**, as in present AM broadcast standards, the angle modulated carrier is amplitude modulated with the sum of the audio information present in the program source. Thus to a monophonic receiver, the signal is no different from the signals being received under the present standards. This sum signal is comprised of two signals, left (L) and right (R). To provide stereophonic information, angle modulation results from straight forward quadrature modulation followed by limiting. That is, the monophonic (L + R) provides in-phase modulation while (L-R) provides quadrature phase modulation. The limiter assures constant level exciter drive to the transmitter. A separate signal, a 25 Hz pilot tone, is added to the quadrature difference (L-R) signal for indicating the presence of a received stereophonic broadcast. Existing AM broadcast transmitters may be used with relatively simple and inexpensive modifications.

**1300 C-Quam AM Stereo Exciter & 1310 C-Quam AM Stereo Modulation Monitor**.....\$11,700.00  
**2nd Transmitter Installation for day/nite option**....\$500.00  
**CALL FOR THE ALLIED PRICE**



## DELTA

**C-QUAM AM STEREO Generator/Monitor.** Price includes installation and day/night switch.

**MANUFACTURER'S SUGGESTED LIST PRICE**....\$11,700.00  
**CALL FOR THE ALLIED PRICE**



## COAXIAL DYNAMICS

**Coaxial Dynamics, Inc.** is a leading manufacturer of economical precision equipment for the measurement and termination of RF power. Several models of Wattmeters and RF loads (dry, liquid, water cooled & heat exchanger types) are available for power ranges of 0.1 watt to 50,000 watts.


**ALLIED CARRIES THE ENTIRE COAXIAL DYNAMICS LINE.**  
**CALL FOR THE ALLIED PRICE**



## QEI

The **695** is QEI's new advanced technology FM exciter with more features and better performance than heretofore available. It is designed for unparalleled transparency in the transformation of program material to an FM signal. Noise and distortion of all kinds are reduced to a point where they become difficult to measure.

**CALL FOR THE ALLIED PRICE**

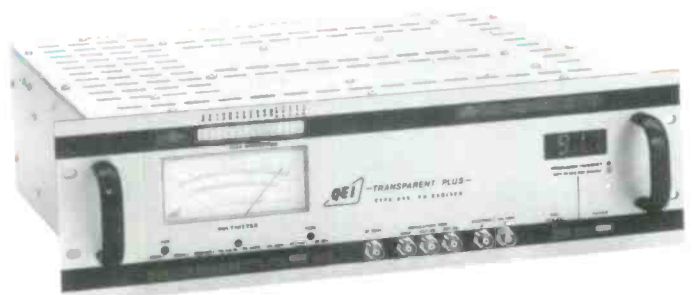


## BIRD

The first of a new series of dry, forced air cooled high power Load Resistors, **Model 8572** is a well-matched termination for 50 ohm rigid line systems to 25,000 watts for testing and alignment of transmitters. The RF power is dissipated in a large number of rugged parallel/series connected resistor elements, which not only provide an extensive total surface for heat transfer, but assure that the Load is not rendered inoperative due to the unlikely failure of one or two of the elements.

As a dry Load, model 8572 is very nearly maintenance-free, and presents fewer problems, should servicing ever become necessary. The units are repairable in the field. A special option permits ducting hot air away from the Load, and out of your work environment.

**PRICES UPON APPLICATION 15KW model now available**

Model  
8572

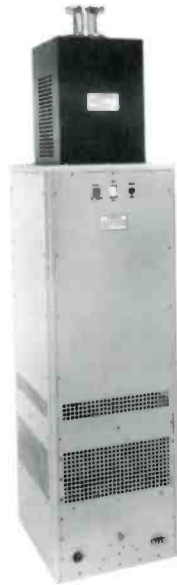

Model  
8645

## Model 8645

- Power rating 25 kW continuous duty up to 900 MHz
- Weight 155 lbs
- Distilled water or Ethylene Glycol
- 10 kW and 80 kW in this series plus 2½ to 7 kW dry loads and Econo wet loads up to 80 kW.

**PRICES UPON APPLICATION**

Bird Electronics known for accuracy for more than a quarter of a century, offers **Thru-line® RF Directional Watt Meters, RF Load Resistors**, up to 80 kW and **Wattcher® Protection Systems**.

**ALLIED CARRIES THE ENTIRE BIRD LINE**

## ELECTRO IMPULSE

The **Electro Impulse product line** of loads includes many state-of-the-art designs. They pioneered the development of dry, forced air cooled loads for use up through FM frequencies, which are now extremely popular in the broadcast industry.

Their DACT series of loads was the first dry, convection cooled series with power ratings up to 25 kW average power. Both of these types of loads are very popular as the availability of water for load cooling decreases.

ELI offers RF coaxial loads with oil dielectric, twin line loads in a balanced input configuration, coaxial water loads, waveguide coaxial water loads, dry baluns, calorimeters, automatic test equipment, high power RF attenuators, RF power meters, in-line directional wattmeters and special cooling systems.

**PRICES UPON APPLICATION**



DPTC 50KFM



DPTC 10KFM



DPTC25KFM

## ELECTRONIC RESEARCH

**ERI Isolation Transformers** are designed to couple the FM power across the base insulator of a transmitting tower used jointly for AM or FM antennae without introducing objectionable mismatch into the FM feed line. An isolation transformer is highly desirable for feeding high impedance AM radiators or AM radiators which are part of an AM directional array which might be adversely affected by a "bazooka" isolation system. Captive bullets in and out. 10, 25, 40 & 50 KW sizes.

**PRICES UPON APPLICATION**



## KINTRONICS

The use of **Kintronics FMC Series Isocouplers** at the base of an AM tower permit the installation of an FM antenna and connecting transmission line on the tower without requiring insulation and tuning of the transmission line. Since the shunting capacity of these units across the base insulator of the AM tower is less than 150 pf, the effect on the base input impedance of the tower will be negligible for most single radiators or directional elements. The transmission line may be fastened to the tower for its full length permitting the tower to operate with normal radiation characteristics. Many of these isocouplers are now in service at permanent installations having stereo operation and judged by the user to be of superior quality. 4 units available from 10 watts through 30 kilowatts. Kintronics also offers sampling and transmission coaxial cables, control circuit cables, copper wire and strap, common point bridge, antenna phase monitors, and remote control and phasing systems.

**PRICES UPON APPLICATION**




## DURO-TEST

You need rugged, dependable, long-lasting, quick-to-see **bulbs** where there are tall traffic hazards. The best bulbs that money can buy are built by Duro-Test.

**Model Description**


|               |   |                              |
|---------------|---|------------------------------|
| <b>DT/682</b> | <b>BEACON PS-40 620 watt, mogul base, clear, 125/130 VAC, 10,500 lumens, rated 4500-5500 hours.....\$30.12</b>    | <b>ALLIED PRICE \$ _____</b> |
| <b>DT/684</b> | <b>BEACON-40 700 watt, mogul base, durex, clear 125/130 VAC, 11,200 lumens, rated 7500-8500 hours.....\$43.59</b> | <b>ALLIED PRICE \$ _____</b> |
| <b>DT/424</b> | <b>OBSTRUCTION A-21 116 watt, medium base, clear, 125/130 VAC, 1260 lumens, rated 7500-8500 hours.....\$4.32</b>  | <b>ALLIED PRICE \$ _____</b> |

**DURO-TEST PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

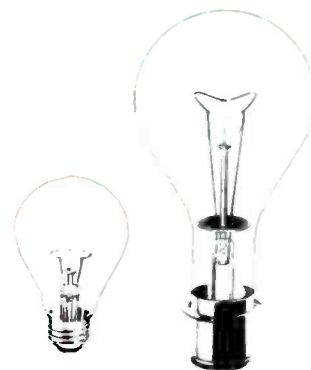

## PI-ROD

- Solid rod, all-welded construction provides greatest strength with minimum surface exposure to wind and icing conditions. Slim Line design offers minimized air resistance.
- A complete line of standard (proven performance) models
- Computerized analysis of loading factors for structure conformity to meet and exceed customer specifications. Working with this data, licensed professional engineers review your specific requirements and determine the ultimate solution.
- Engineered concepts utilizing minimum space requirements. We design systems to meet critical space limitations, with 50% and small guy radii available.
- Minimized interference with reduced face width design improves transmission...another PI-ROD engineering innovation.

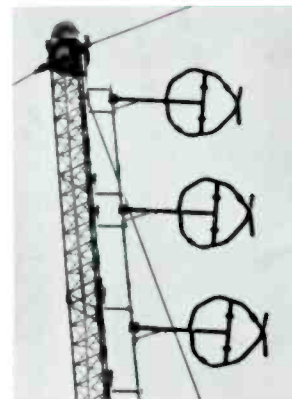

**PRICES UPON APPLICATION**





## HARRIS

The Harris low power **Signal Star Series** of circularly polarized FM antennas feature excellent circularity along with rugged construction for years of superb signal coverage. Due to the excellent design characteristics of the Signal Star antenna series, antenna deicers or radomes are typically not required at antenna heights where radial ice does not exceed 1/2 inch. Under icing conditions of up to 1/2 inch, VSWR is typically 1.7 or less, assuming the antenna exhibits a normal VSWR of 1.1 or less. Should the antenna's environment be subject to a heavier icing condition, Harris recommends the use of optional Signal Star radomes or electrical element deicers.

**PRICES UPON APPLICATION**

---

## COMARK



The **Comark Series** of FM circularly polarized antennas utilize identical radiating elements for both the lower power and high power series. The low power utilizes 1 5/8" feedlines while the high power uses 3 1/8" feedline. Both series of antennas are available in systems that incorporate 1 to 14 elements. This series is basically a 1 1/2 turn helix separated one wavelength apart. The radiation centers of both the vertical and horizontal components are identical. De-icers are available. Comark educational antennas utilize the same basic design as the high and low power models. However, due to their low power requirements, the radiating elements are constructed from a single piece of 7/8" stainless steel tubing, complete with flexible coaxial interconnect cables and mounting hardware.

**PRICES UPON APPLICATION**

---

## JAMPRO




The **JSCP Series B FM** broadcast antennas offer rugged construction, low wind loading, excellent performance for stereo, SCA broadcasting, VSWR bandwidth, true circular polarization, and are available with from 1 to 16 bays with de-icers and radomes. The JBCP series is a circularly polarized FM antenna designed for applications requiring relative insensitivity to icing along with high antenna input power. The JBCP antenna will handle up to 40 kW per bay and up to 120 kW per system. The JBCP is available with from 1 to 8 bays. The JLCP series 2 gives the Class A station several good choices. Power rating is 3 kW per bay or maximum 7.5 kW above two bays. The JLLP series elements are cable fed from a central power divider. They are rated at 1 kW per bay and provided as a standard antenna.

The JSDP Panel Antenna is also available.

**PRICES UPON APPLICATION**

---

## CELWAVE

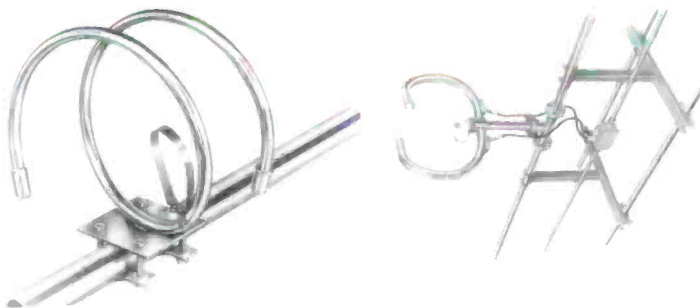

**Celwave Circularly and Horizontally Polarized Antennas** are available with any combination of null fill and beam tilt. The high power and low power antennas utilize identical radiating elements. The low power utilizes 1 5/8" feedline, the high power 3 1/8" feedline. Both series of antennas are available in systems which incorporate 1 to 16 elements. Educational FM antennas differ from the commercial versions in that they are fabricated of 7/8" stainless steel tube, and fed with flexible solid dielectric cables.

**PRICES UPON APPLICATION**

## NAD

The **NAD 4300** Monitor Series tuner establishes new standards for FM tuner performance. It is the world's first tuner with built-in decoding for FMX™ extended-range stereo broadcasts. It exemplifies today's most advanced audio technology. Even without FMX the 4300 stands among the world's finest "super-tuners" with regard to sensitivity and immunity to interference. Very few tuners at any price can equal the 4300's ability to pull in weak FM signals and recover clean, quiet sound from them. State-of-the-art performance: 55dB stereo separation, 80dB selectivity, 120dB image rejection. The signal-to-noise ratio exceeds 80dB in strong signals, even without FMX. Other models available.

**CALL FOR TODAY'S ALLIED PRICE**



## PROTON

To achieve uncompromising fidelity with plenty of power, the **Radio** from **Proton** uses one 20-watt amplifier to power the 4½ inch woofer, and a second 5-watt amp drives the efficient 1¾ inch dome tweeter. Since each amplifier functions best within its own portion of the frequency spectrum, the radio's 25-watts is equivalent to over 40 watts from a conventional amplifier. The Schotz variable bandwidth PLL detector gives a revolutionary and dramatic effect on reception. Optional rack mount available.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$299.00**

**ALLIED PRICE \$** \_\_\_\_\_



## POTOMAC

The **SMR-11** is an AM broadcast band receiver of superior performance with many capabilities useful to the broadcaster. Receiver tuning is continuous from 530 to 1700 kHz, and can be locked with crystal accuracy at any desired frequency. The antenna can be a remotely located tunable ferrite rod unit (ANT-11), broadband wire or a whip. Bandwidth is determined by two switch-selected 455 kHz ceramic filters with bandwidths of 28 kHz and 12 kHz. Other special filters are available and can be installed.

| <i>Model</i>   | <i>Description</i>  |                              |
|----------------|---|------------------------------|
| <b>SMR-11R</b> | <b>Rack mount version.....</b>  | <b>\$1650.00</b>             |
|                |   | <b>ALLIED PRICE \$</b> _____ |
| <b>SMR-11D</b> | <b>Desk mount version.....</b>  | <b>\$1725.00</b>             |
|                |   | <b>ALLIED PRICE \$</b> _____ |
| <b>ANT-11</b>  | <b>Remote, tunable ferrite rod antenna with internal, low noise preamplifier.....</b> | <b>\$500.00</b>              |
|                |   | <b>ALLIED PRICE \$</b> _____ |

*C/Quam demodulator also available.*

**POTOMAC PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**



## CROWN

The **Crown PFM-3** uses a true digital detector section tuner which cannot go out of alignment, drift with age, or add mis-tuning distortion; thus providing outstanding performance in the AM and FM bands. It also incorporates a new Dual-Quartz system for improved signal-to-noise ratio, a toroidal transformer for reduced hum and noise, a "scan level" control for tuner strength prior to scan stop and lock. Also includes six each AM and FM presets, a multipath indicator and a calibrated signal-strength indicator.

**MFR'S SUGGESTED LIST PRICE (less cabinet).....\$795.00**

**ALLIED PRICE \$** \_\_\_\_\_



## KEITH MONKS



The **MK II Professional Record Cleaning Machine** is a tried and tested product which is used by broadcasting authorities and record libraries all over the world. It is only advisable to clean a record with the Keith Monks record cleaning machine every 15 — 20 playings. Records are cleaned using a mixture of 50% distilled water and 50% industrial methylated spirits which will remove grease, hardened sludge and loosen embedded grit. The drying process removes all traces of the cleaning liquid along with the foreign material leaving the record clean and dry. During the process, the turntable revolves at speed and the liquid solvent is applied by swinging the brush over the record and depressing the applicator plunger. Having thus wetted the record, dissolved the grease and loosened any embedded material, the suction arm is simply moved to the center of the record. As the liquid on the record is moving to the edge, it is advisable to vacuum from the center outwards rather than inwards. As it passes over the surface the suction removes all liquid along with the suspended foreign matter. The whole process can be completed in about 1½ minutes per side of record.

SIZE: 16½"H x 19"W x 18"D; NET WEIGHT: 65 lbs  
MFR'S SUGGESTED LIST PRICE.....\$2196.00



The **Studio Mark 3** double record cleaning machine is designed for the user with regular cleaning of quantities of records. The twin decks enable one record to be cleaned while the other is being dried. Records can be cleaned twice as quickly with the double machine. There are 2 applicators and cleaning brushes and the suction arm is switched to operate on either turntable. The arm reverse switch has 3 positions; the center is in the off position, the left side operates the left turntable while the right side operates the right turntable. Larger versions are made to special order.

SIZE: 14¼"H x 29¼"W x 18¾"D; NET WEIGHT: 96 lbs;  
VOLTAGE: 115 volts A.C. 60 cycles  
MFR'S SUGGESTED LIST PRICE.....\$2629.00

## DISCWASHER

**DISCWASHER** manufactures fine products for record care in broadcast facilities.

|                            |         |
|----------------------------|---------|
| Cleaning system.....       | \$16.50 |
| Disckit.....               | \$59.95 |
| ZeroStat Destaticizer..... | \$29.95 |
| Fluid                      |         |
| 16 oz.....                 | \$16.95 |
| 6 oz.....                  | \$ 9.95 |
| 1.25 oz.....               | \$2.50  |
| CD Cleaner.....            | \$19.95 |



## TECHNICS

The **TECHNICS SP-15 turntable** features:

- Quartz Synthesizer Pitch Control in 0.1% steps up to ± 9.9% at all three standard speeds-with digital display
- Instant starts (0.4 sec.) (About 1/3 revolution)
- Three precision speeds, 33 1/3, 45 and 78.26 rpm make this unit perfect for all phono reproduction applications.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$870.00

ALLIED PRICE \$ \_\_\_\_\_





## TECHNICS

The **SP-25** offers you a high professional standard of excellence, plus the kind of flexibility and convenience that is important for any use. Features include total quartz-locked pitch control within  $\pm 6\%$  range from rated speeds, extremely high torque for fast starts and load stability.

- 45 and 33 rpm
- about  $\frac{1}{2}$  revolution to full speed

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$490.00**

**ALLIED PRICE \$** \_\_\_\_\_



The first with instant torque and no rumble is the **SP10-MKIII** by TECHNICS. The world's best and most desired professional turntable. Used by most top U.S. radio stations.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1420.00**

**ALLIED PRICE \$** \_\_\_\_\_



The **SP-10 MK III** is the most advanced quartz synthesizer DD turntable from Technics, the acknowledged hi-fi turntable leader. Both specifications and sound quality reveal that the SP-10 MK III extends the frontiers of excellence. For example, starting torque is 16 kg/cm and only one quarter of a second is required to reach rated speed.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2665.00**

**ALLIED PRICE \$** \_\_\_\_\_



The **SL-1200MK2** incorporates numerous improvements. In addition to being quartz-locked direct drive, it permits continuous speed adjustment under quartz control (within a range of  $\pm 8\%$ ). Its starting torque is a high 1.5 kg cm (1.3 lb in), with the platter reaching rated speed within 0.7 second from standstill. It also maintains a tight lock on the selected speed. The SL-1200MK2 should also be virtually feedback-proof because of its special base design. The platter itself is damped on both sides to avoid ringing.

**CALL FOR THE ALLIED PRICE**



---

## RUSSCO

### STUDIO PRO

- Unit is powered by a heavy duty Bodine synchronous motor
- 2 speeds - 45 and 33 rpm

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$527.00**

**ALLIED PRICE \$** \_\_\_\_\_





## RUSSCO

The **RUSSCO CUE MASTER** is a three-speed professional turntable powered by a heavy duty Bodine synchronous motor. It features only three moving parts for unsurpassed reliability.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$467.00**

**ALLIED PRICE \$ \_\_\_\_\_**

---

## BROADCAST ELECTRONICS



The **QRK 12C** is a three speed, rugged, reliable turntable which can come up to speed in a fraction of a second, but can still operate free from rumble, wow and flutter.

Outer rim drive has been demonstrated as the best method for achieving "instant start" with a minimum of vibration effects. Center hub drive does not have the mechanical advantage of outer rim drive. ALLIED CARRIES MOST OF THE BROADCAST ELECTRONICS LINE.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$410.00**

**ALLIED PRICE \$ \_\_\_\_\_**

---

## HENRY



The **Universal Turntable Controller (UTC)** by HENRY is a remote control interface device that allows full remote control of popular direct-drive turntables, such as Technics SP10, SP15, SL1200MKII, and Russco RT-700. The UTC easily connects to the turntable with just three wires, and provides CMOS/contact closure compatible outputs for separate START and STOP switches plus RUN and STOP tally lamps. One UTC will control two turntables.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$195.00**

**ALLIED PRICE \$ \_\_\_\_\_**

---

## AUDIOMETRICS



The **Audiometrics TP-84** is a proven, high quality stereo turntable preamplifier which will provide many years of dependable service because it meets the specification requirements demanded by broadcasters worldwide. The TP-84 follows the RIAA curve to within 1 dB in its entire bandwidth while maintaining a signal to noise level of 70 dBm. Distortion figures of .08% make the TP-84 transparent to your turntable cartridge. Rack mountable.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$270.00**

**ALLIED PRICE \$ \_\_\_\_\_**

## ATI

### P1000 SERIES

- High gain: 1mVrms @ 1kHz for + 8dBm output.
- Front panel adjustable, accepts any cartridge.
- High input overload: 320mVrms @ 1kHz, cannot be overloaded even by direct and digitally mastered disks driving high output cartridges.
- Lowest noise: 80 dB S/N referred to 10mVrms @ 1kHz, cartridge source impedance.
- Flat Response: RIAA curve  $\pm .25$  dB.
- Mounting brackets supplied for internal turntable cabinet mounting.

P1000-1 Dual/Stereo Transformer Outputs.....\$365.00  
 P1000-2 Dual/Stereo Balanced Differential Outputs.....\$365.00  
 P1000-3 Dual/Stereo Single Ended (unbalanced) Outputs

ALLIED PRICE \$ \_\_\_\_\_

### ENCORE PREAMP


- Input impedance: programmable 50 k to 100 k ohms, 50 to 400 pf in 50 pf steps
- Input level: 5 mV nominal for +4 dBm output, 250 mVRMS maximum at 1 kHz
- Noise: S/N 80 dB minimum unweighted, 90 dB "A" weighted, ref. 10 mVRMS at 1 kHz, 600 ohm input termination and 20 kHz measurement band
- Output level: +18 dBm into 600 ohm balanced or unbalanced loads. 10VRMS into high impedance loads
- Output impedance: 400 ohms balanced, 200 ohms single ended, split and RF bypassed.

P100S +18 dBm active balanced stereo.....\$259.00

ALLIED PRICE \$ \_\_\_\_\_



P-1000 SERIES PHONO AMPLIFIERS

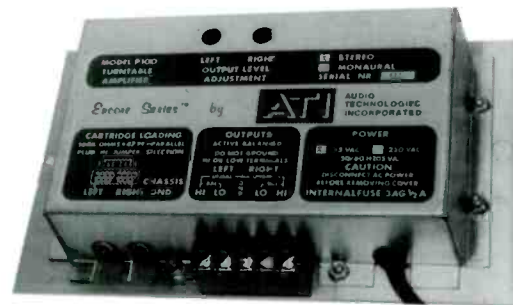

ENCORE PREAMP

## STANTON

The **Stanton Model 310B** professional phono preamplifier-equalizer was designed to correctly interface all Stanton and selected magnetic phonograph cartridges for optimum playback of disc records and calibration of audio systems. The Stanton 310B preamp features universal mounting by special brackets, instant selection of flat or NAB post-emphasis curves, switchable effective rumble filter, individual adjustment of gains and high frequency responses, trimming of the capacitive cartridge loading at the input, provision for setting the power transformer for either 117 or 230 VAC 50/60 Hz operation and immunity to external magnetic AC fields. ALLIED CARRIES THE ENTIRE STANTON LINE.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$225.00

ALLIED PRICE \$ \_\_\_\_\_



## RTS

The **Model 405** is a high-quality two-channel phono pre-amplifier designed for professional applications, including disc mastering rooms, broadcast stations and high quality commercial installations. It features adjustable cartridge termination, switchable rumble filter, two selectable sets of response level controls and two output formats.

FREQUENCY RESPONSE: Re RIAA  $\pm 0.5$  dB  
 SIGNAL/NOISE RATIO: -72 dB  
 TOTAL HARMONIC DISTORTION: -90 dB/0.003%  
 MAXIMUM OUTPUT LEVEL, BALANCED: +24 dBm

MANUFACTURER'S SUGGESTED LIST PRICE.....\$437.00

ALLIED PRICE \$ \_\_\_\_\_







## RUSSCO

Mono or stereo versions available with balanced or unbalanced output. The **FIDELITY-MASTER** series offers RIAA equalization. The **FIDELITY-PRO** units feature switchable high and low frequency filters. The balanced output models include highest quality transformers for true line isolation.

| Model | Description                           | ALLIED PRICE \$ |
|-------|---------------------------------------|-----------------|
| FPMU  | mono unbalanced 600 ohm output.....   | \$189.00        |
| FPMB  | mono balanced 600 ohm output.....     | \$225.00        |
| FPSU  | stereo unbalanced 600 ohm output..... | \$282.00        |
| FPSB  | stereo balanced 600 ohm output.....   | \$339.00        |

Consider these value-packed features of the **PHONO-MATE Pre-Amps:**

- Full solid-state circuitry
- Lots of headroom at +16 dBm
- RIAA equalization
- Mono or stereo versions are available with balanced or unbalanced output
- The balanced output models include highest quality transformers for true line isolation

| Model | Description                           | ALLIED PRICE \$ |
|-------|---------------------------------------|-----------------|
| 1U    | unbalanced mono 600 ohm output.....   | \$109.00        |
| 1B    | balanced mono 600 ohm output.....     | \$125.00        |
| 2U    | unbalanced stereo 600 ohm output..... | \$163.00        |
| 2B    | balanced stereo 600 ohm output.....   | \$195.00        |
| PS    | external power supply.....            | \$68.00         |

**RUSSCO PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.**

## AUDIOMETRICS



The stylish, practical and economical professional **S-220 Tonearm** has a light alloy arm, with low mass cartridge shell and precision ball bearing rotation. Also has adjustable lateral balance and weight adjustment for tracking force. Arm height is adjustable from 1 9/16" to 2 3/8" and removable cartridge shell uses standard 4 pin connector. Stylus pressure adjustable from 1 to 6 grams depending on cartridge. Tracking error is rated at +4°, -1°. Cable rated at 100 pF capacitance.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$99.00**  
**ALLIED PRICE \$** \_\_\_\_\_

## BROADCAST ELECTRONICS



The **BROADCAST ELECTRONICS S-320** 12" tone arm is constructed of tubular aluminum with a die-cast cartridge shell, that accepts all standard stereo or mono cartridges. It has a vertical height adjustment and friction-free chrome steel ball vertical movement. It tracks at 1 gram or less and includes a counterweight. Connects with standard plugs.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$150.00**  
**ALLIED PRICE \$** \_\_\_\_\_

## AUDIO TECHNICA

### ATP-12T

- Fits wide range of turntable heights and base thicknesses
- Sealed horizontal and vertical ball bearing pivots
- Accurate, built-in VTF gauge, no accessory gauge needed
- Low resistance, anti-corrosion, gold plated connector throughout



MANUFACTURER'S SUGGESTED LIST PRICE.....\$215.00

## STANTON

The **500 MK II series** of cartridges comes in three variations, primarily differing in grams of tracking force. Its design is to deliver superb sound quality, ruggedness and reliability, yet not compromise professional broadcast standards.

| Model      | Description                       |         |
|------------|-----------------------------------|---------|
| 500EE MKII | .75 to 1.5 grams, elliptical..... | \$21.25 |
| 500E MKII  | 1 to 2 grams, elliptical.....     | \$18.38 |
| 500A MKII  | 1 to 2 grams, spherical.....      | \$15.75 |

CALL FOR THE ALLIED PRICE

The **600A** is applicable to broadcasters that demand a spherical stylus tip, and a cartridge that tracks at 2 to 4 grams. It possesses outstanding frequency response, and channel separation easily surpasses the requirements of most broadcast standards.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$24.20

ALLIED PRICE \$ \_\_\_\_\_

The **681A Cartridge** features extreme linearity plus widest and flattest possible response essential for precise alignment of cutting heads. Its factory calibrated frequency response meets the most rigid tolerances.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$55.00

ALLIED PRICE \$ \_\_\_\_\_



## SHURE

The **SC35C** is designed for use on the heaviest and most rugged tone arms which require a tracking force of 4 to 5 grams. The stylus assembly of the SC35C is rigid enough to withstand the punishment of continuous backcueing, yet compliant enough to offer excellent mid and high frequency reproduction. The SS35C is the spherical replacement stylus for this cartridge.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$48.50

ALLIED PRICE \$ \_\_\_\_\_

### SC39 Series


Up to now, it was necessary to compromise true hi-fi performance to get the ruggedness required for professional use. To identify precisely the use and abuse to which professional phono cartridges were subjected in actual work situations, Shure engineers went into the field where they virtually "lived with" the professionals. They sat up with the all-night man in broadcast stations, worked in recording labs and shared the booth in "Discos!"

- \* Built to stand up to professional use
- \* Designed to stand up to a professional's critical listening

|        |                                |         |
|--------|--------------------------------|---------|
| SC39B  | 1.5 to 3 grams, spherical..... | \$68.00 |
| SC39EJ | 1.5 to 3 grams, biradial.....  | \$76.00 |



CALL FOR THE ALLIED PRICE



## SHURE

The **Shure V-15 Type V** cartridge comes in three styles, the MR (micro ridge) model, the 15B and 15P. The micro ridge version is radically different from the hyperelliptical tips (which generally reduce harmonic distortion dramatically), and geometrically is longer and more pointed, therefore running deeper in the LP groove. It's said to reduce harmonic distortion by another 50% over equivalent hyperelliptical styli in the line. There's a de-staticizer and damping mechanism which reduces low frequency resonance and susceptibility to warp in LP's. The "B" version is the same V-15 without the "MR" refinement. You might think of it as the original with the destaticizer brush. The "P" version is a P-mount V-15, for mounting on P-mount arms and does not include the destaticizer and damping mechanism.

| Model    | Description          |                                |
|----------|----------------------|--------------------------------|
| V15 V-B  | Hyperelliptical..... | \$237.50 ALLIED PRICE \$ _____ |
| V15 V-MR | Micro ridge.....     | \$297.00 ALLIED PRICE \$ _____ |
| V15 V-P  | Hyperelliptical..... | \$221.50 ALLIED PRICE \$ _____ |

SHURE PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES. CALL FOR TODAY'S ALLIED PRICE.

"ALLIED CARRIES THE ENTIRE SHURE LINE"

## — CD PLAYERS —



## STUDER

Almost every conceivable feature has been realized in the **A727 CD PLAYER** by STUDER: professional programming capacity with 19 program steps, extremely short cueing times, calibration tone for adjustment of system levels, adjustable headphones output and two audio outputs. The "oversampling" technique, eliminates distortion of frequencies above half of the sampling rate without affecting phase relationship and guaranteeing highest sound resolution.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$2350.00

ALLIED PRICE \$ \_\_\_\_\_



## SONY

The **CDP-3000/CDS-3000** is a modular professional compact disc player system with unsurpassed quality music. It allows instant and programmed play with the extra convenience of controlling two CDP-3000 players. The control unit is independent of the player(s) — only a single cable is required for control interface. All controls and indications, except the eject button, are functionally arranged on the desk-top control unit. Its front loading design permits mounting of two units side by side in a standard 19" rack. It features 10-key direct access and bi-directional search, programmed play, flexible monitoring, digital time display, remote start/stop.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$5650.00

ALLIED PRICE \$ \_\_\_\_\_



## TASCAM

The **CD-501 Compact Disc Player** offers superior CD reproduction performance in a model that has been specifically designed for professional applications. It is built to rugged standards that guarantee consistent, reliable performance even through demanding non-stop use. It also features electronically balanced XLR type line outputs for direct plug-in compatibility with professional equipment.

MANUFACTURER'S SUGGESTED LIST PRICE.....\$1099.00

ALLIED PRICE \$ \_\_\_\_\_



# CD PLAYERS / WEATHER EQUIPMENT

**ALLIED**  
Broadcast Equipment

## DENON

The **Model DN-950F CD Cart Player™** is designed for actual broadcasting and production activities. Simple design and ease-of-operation have been stressed. The DN-950F is a straight-forward machine to use. In order for the operator to quickly familiarize himself with the CD Cart Player™, it features quick cartridge loading, functional operations and dimensions almost identical to other professional broadcast cartridge equipment. Moreover, the Denon CD Cart Player™ offers the outstanding sound quality of the compact disc.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1350.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## GORMAN REDLICH

The **CRW** weather receiver is rack mounted, remotable with a black anodized rack panel. Demuting and remote alarm are initiated by a 1050 Hz "alert" tone. A relay closure is initiated by either the 1050 Hz tone or a 1650 Hz forecast update signal tone. The CRW features crystal and ceramic IF filters, plus a double tuned dual gate MOSFET RF stage.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$475.00**

**ALLIED PRICE \$ \_\_\_\_\_**



## — WEATHER EQUIPMENT —

## RAYTHEON


The new **JMA-3710 High Contrast, 83-Mile Color Raster Scan** offers the ultimate in multi-color radar performance. Ten ranges out to 83 statute miles are available, with 30 percent offset to increase effective forward range, plus target plotting, dual Electronic Bearing Line (EBL), dual Variable Range Marker (VRM), and many target enhancement features. The JMA-3710 Radar has passed Raytheon's tough environmental tests for shock, vibration, temperature extremes and resistance to corrosion and fungus.

**PRICES UPON APPLICATION**

The new **Model 4804C Color Radar**, featuring Dual VRM & EBL, with 55 statute mile range and a 10-inch TV type display, is very compact. The 4804C overcomes the large space requirements of previous generation color radars. It makes good use of color for target tracking, featuring two Variable Range Markers (VRM), two Electronic Bearing Lines (EBL), on-screen digital readouts, plus zone intrusion alarm. Other features include: offset, which increases effective forward range to 54 nautical miles; target expander; low noise front-end receiver; automatic and manual tuning; and day/night vision modes. High intensity video ensures exceptional target pickup.

**PRICES UPON APPLICATION**

**RAYTHEON IS AVAILABLE EXCLUSIVELY FROM ALLIED**

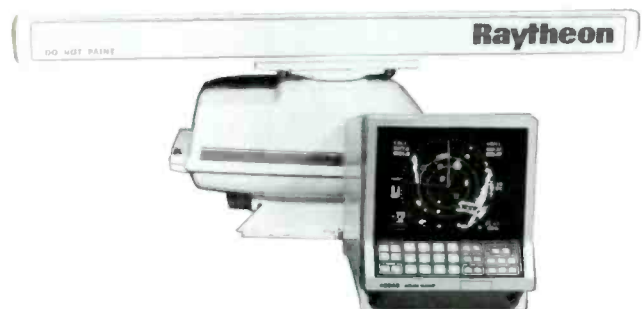

**CATEL**



The **FMX-2100** FM Modulator is a modular packaged frequency modulation cable transmitter designed specifically for CATV and CCTV applications. With direct audio sources such as AM/FM tuners, tape decks, microphone preamplifiers and short wave receivers. It can add varied FM signals to the cable system.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$1015.00**

**ALLIED PRICE \$ \_\_\_\_\_**




The **FMS-2000** FM Stereo Modulator is a complete stereo modulator in a compact 1.75 by 19 inch cabinet. The unit contains a power supply, stereo generator and frequency agile modulator.

It produces a L-R double sideband suppressed carrier signal, together with a L + R signal and a crystal controlled 19kHz pilot signal. The resulting output is a multiplexed signal, FM modulated in the 87-108MHz band. The FMS-2000 is completely agile, field tunable in steps of 100kHz.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$995.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**WEGENER**

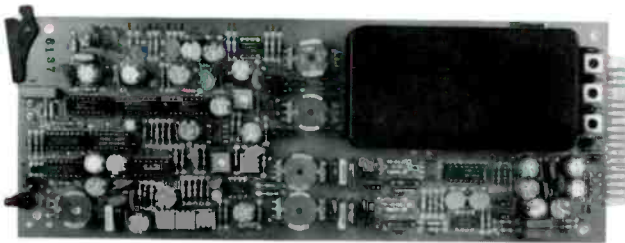

The **Model 1691 SW FM Modulator** is used to transmit FM stereo audio programming over cable systems. The Model 1691 SW contains a complete FM stereo generator capable of accepting left and right channel audio inputs and provides multiplex output at a crystal-controlled RF frequency between 88 and 108 MHz. Other frequencies are also available. An external audio input feature permits the insertion of locally generated audio programming during specified breaks in the network program or upon command from an external switch closure.

The Model 1691 SW FM Modulator plugs into Wegener Model 1601 or 1602 Mainframes.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$700.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**ULTIMETER**



The **ULTIMETER Model 20** has been greeted enthusiastically by a broad cross section of professional and recreational outdoorsmen, because it is three fine instruments in one:

A comprehensive electronic weather station for making accurate local weather forecasts; monitoring cold or wind conditions that could damage plants or crops; advising winter sports enthusiasts of wind-chill temperatures, etc.

A revolutionary electronic altimeter that is truly more valuable than a compass - and easy to use. It can add an interesting new dimension of pleasure to cross country driving to remotes.

A precise, quartz clock that includes a 4 year calendar and a stop watch that can time events up to 60 hours.

Battery operation, automatic scanning and alarm capabilities further enhance the instrument's exceptional versatility.

**MANUFACTURER'S SUGGESTED LIST PRICE**

**Basic Ultimeter W/Temp Sensor.....\$300.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**Complete system includes Ultimeter Model 20, Anemometer & Wind Vane, Rain Gauge.....\$489.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**ROBERT A. JONES**

Tepco manufactures for **Robert A. Jones** efficient, small one and ten watt rebroadcasting systems for reliable year-in and year-out service in the 88 to 108 MHz FM band. Their modern 100% solid-state design provides freedom of signal selectivity and overload problems. These FM translators use MOSFET front ends, dual gate mixing, superb IF filter networks, two independent AGC loops, five stages of limiting and positive muting action. RF output is regulated for signal variation and line voltage changes, monitored with built-in reflectometers, and protected in the event of serious load changes. The only FM translators which may be ordered with a provision for locally-originated program input for permitted announcements.



| Model  | Description   |
|--------|---|
| J-316  | 1 watt.....\$2487.00 ALLIED PRICE \$ _____                  |
| J-316M | 1 watt/w local mod. ....\$3025.00<br>ALLIED PRICE \$ _____  |
| J-317  | 10 watt....\$2622.00 ALLIED PRICE \$ _____                  |
| J-317M | 10 watt/w local mod. ....\$3159.00<br>ALLIED PRICE \$ _____ |

| Model    | Description  |
|----------|--|
| J-317-2  | dual 10 watt....\$3975.00<br>ALLIED PRICE \$ _____         |
| J-317-2M | with local modulator....\$4575.00<br>ALLIED PRICE \$ _____ |
| J-316-2  | dual 1 watt....\$3775.00<br>ALLIED PRICE \$ _____          |
| J-316-2M | with local modulator....\$4375.00<br>ALLIED PRICE \$ _____ |

PRICES ABOVE ARE MFR'S SUGGESTED LIST PRICES.

**BENCHMARK**

The **DIA-1A** and **DIA-2A** retrofit into existing equipment and may be used with virtually any existing supply voltages up to  $\pm 26$ VDC volts. These differential input amplifiers provide the optimum answer for balanced inputs in your equipment. The problems of space, mounting, wiring and A.C. requirements found with external balancing systems, are eliminated. The DIA-1B uses split ( $\pm$ ) supplies, the DIA-2A uses a single (+) supply.

| MANUFACTURER'S SUGGESTED LIST PRICE |                               |
|-------------------------------------|-------------------------------|
| 1B .....                            | \$55.00 ALLIED PRICE \$ _____ |
| 2A .....                            | \$55.00 ALLIED PRICE \$ _____ |


The **DOAs-1 & 2** provide the optimum answer to the need for a professional level interface, and at less than half the price of an external device. With the DOAs-1 & 2, cabling, space, mounting and AC power problems are eliminated. The DOA-1A uses a split power from  $\pm 9$ V to  $\pm 22$ V D.C. The DOA-2A uses a single (+) supply from +18V to +44V D.C.

| MANUFACTURER'S SUGGESTED LIST PRICE |                               |
|-------------------------------------|-------------------------------|
| 1A .....                            | \$55.00 ALLIED PRICE \$ _____ |
| 2A .....                            | \$55.00 ALLIED PRICE \$ _____ |

ALLIED CARRIES ADDITIONAL BENCHMARK PRODUCTS



DIA-1B & DIA-2A

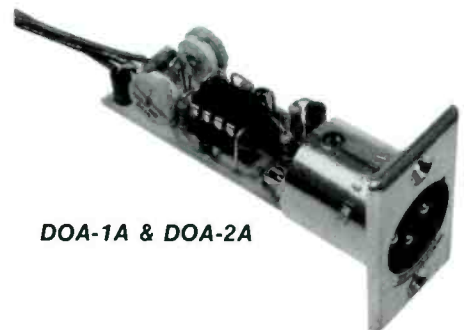

DOA-1A & DOA-2A

**DALE**

- \* Three basic models provide optimum protection for most secondary power installations: **SPA-100** for 120 volt AC circuits, **SPA-200** for 208-277 volt AC circuits and **SPA-400** for 480 volt AC circuits. Up to 50,000 AMP discharge rating.
- \* Automatically resets - has multi-stroke protection capability.
- \* Weatherproof housing for indoor or outdoor use.
- \* Easy installations; Maintenance free; No power consumption.
- \* Shunt capacitance (line to ground): 25 pf max. SPA-100 and 200; 50 pf max. SPA-400.
- \* Insulation resistance: 10 megohms minimum.
- \* Operating temperature range: -40 to +70 degrees C.
- \* Leads: #12 AWG stranded leads, PVC insulation, 18" long. Black line for line (phase) connection, green lead for ground.
- \* Mounting: 1. 1/2-14 NPSL nipple for fuse or junction box mounting.  
2. L bracket for wall or pole mounting. Mount with two #8 screws spaced 1" apart.



SPA SURGE PROTECTORS

CALL FOR THE ALLIED PRICE





**ASSOCIATE PRODUCER®**

Allied's **Associate Producer** facilitates and centralizes your dubbing needs. The turntable mount is our famous shock absorber. (Page 47).

We invite you to select and customize components. The cartridge and tonearm of your choice; a Technics SP15, SP25, or SP10 turntable (Page 112, 113); a CD player of your choice (Page 120); a cassette deck (Page 78); an amplifier (Pages 1, 2, 3); speakers such as TOA, JBL, or ALC (Pages 87, 88,) and a pair of Omnimounts (Page 51) to mount the speakers to sides or top. You may choose an Audicord, BE, Otari, Fidelipac, or Tapecaster cart machine.

**SPOOL TOOL**



Great for mic, coax, and electrical cable. Spacers included will adapt, your **SPOOL TOOL SR**. Model 105 core from 1½" wide to 3" wide. Handles and all hardware are included. Easy to assemble. Made of high impact polyethylene plastic, SPOOL TOOL SR. is lightweight, easy to clean and never rusts. It can be hung, stored upright or on its side in any space that measures 16" by 5" to 7½" (including handles) depending on spacers used.

- Model 103 JR. (11½" Dia.).....\$10.95**
- Model 105 SR. (15½" Dia.).....\$14.95**

Extra spacer kits available for even larger capacities.

**HENRY**




**SUPERELAY** is a multi-purpose control interface for use in broadcast station control rooms, A/V systems, or any installation requiring multiple circuit control. SUPERELAY is ideal for controlling the various equipment functions that need to be switched when, for example, a Control Room Mic is turned ON, eg., EBS receiver mute, intercom speaker defeat, telephone bell disconnect, skimmer recorder start, "ON THE AIR" warning lights on, etc. SUPERELAY can be controlled by virtually any console's muting output, or by any external switch, either momentary or maintained. It provides two types of outputs: relay and switched AC.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$195.00**

**ALLIED PRICE \$ \_\_\_\_\_**

**AUDIOMETRICS**

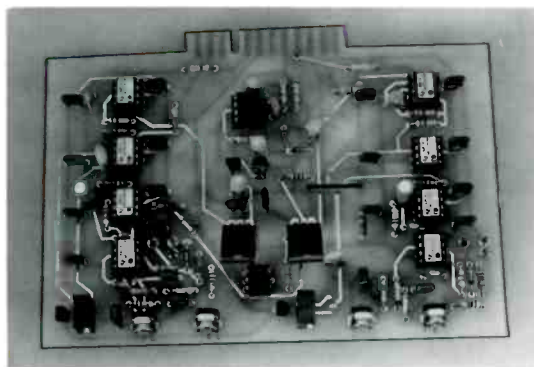

The **Premium Plug-In Card** by Indy Audio is a direct retrofit to replace existing cards in the ITC Premium Series Cart Play machines. Upgrade your faithful ITC's with technology of the 1990's. Direct plug-in. Slew rate, rise time, noise, distortion; all state-of-the-art.

ITC is a registered trademark of 3/M Corp.

**ALLIED PRICE.....\$229.00**

**BGW**

The **BGW Model 2242 Professional Audio Distribution Amplifier** is designed to be a very high performance two channel 1 x 4 (one input and 4 outputs) line amplifier. The Model 2242 is well suited for World Class recording studio and broadcast facilities.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$799.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**ENERGY-ONIX**

AM Protector-Enhancer

- Meets NRSC recommendations
- Can be used with existing station's limiter
- Front panel, switchable audio pre-emphasis circuit, built in 10 kHz filter w/attenuation consistent
- 10 dBm headroom
- Audio distortion less than 0.1%
- Switchable monitor de-emphasis circuit

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$595.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**TELEX**

The **ENG Wireless Microphone System** is a four channel receiver and two channel transmitter packed into the smallest packages ever. The system is designed for ENG broadcast and remote video production and operates in the VHF band between 165-216 MHz. There are 14 standard computer selected frequencies available from Telex. The receiver's simple rotary dial allows quick channel changes in the field. Spring-loaded battery compartment pops up so battery "sled" can be taken out and replaced instantly with a spare.

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$2145.00**

**OTHER TELEX SYSTEMS START AT.....\$ 895.00**

**ALLIED PRICE \$ \_\_\_\_\_**



**KEITH MONKS**

Allied carries the entire World-Famous **Keith Monks** product line. Keith Monks line of Cable Drums are available in various sizes and dimensions permitting storage of up to the largest broadcast cabling. These cable drums are top-of-the-line quality.

**PRICES UPON APPLICATION**




**ENBERG**

BA-6 Broadcast Alert Monitor

- Automatic or manual reset
- 15 watt FLASHING indicators
- All solid-state switching (silent, reliable)
- Opto-isolated inputs prevent false triggering
- Solid oak end panels/neutral beige color
- Mounts on standard 4" box or wall anchors

**MANUFACTURER'S SUGGESTED LIST PRICE.....\$339.00**

**ALLIED PRICE \$ \_\_\_\_\_**

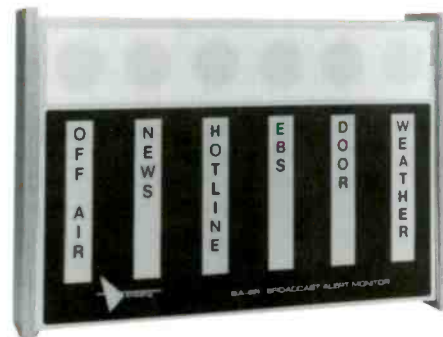


**IGM**

The **IGM Communications Go-Cart 24**, with the unique bi-directional drive logic, has reduced the travel time between cartridge selections to no more than 8 seconds. These unusually fast times are a result of the Go-Cart's microprocessor control which automatically determines the shortest route to the next required cartridge and rotates the cartridge carrier in that direction. The Go-Cart also features exceptional audio quality, rugged construction, easy loading trays, random or sequential modes, state-of-the-art components and much more.

**PRICES UPON APPLICATION**

The **INSTACART Multiple Cartridge Playback** unit was designed with the station engineer in mind. Accessibility to the unit is simple and direct for inspection, cleaning, routine adjustment and functional tests. A plug-in connection mates each removable precision head to its associated electronics. As in all IGM products, components throughout are the highest grade available. Circuitry's fully solid state. Components are mounted on Mil-Spec fiber glass printed circuit cards. Because of the unique cartridge/tray combination, individual playback heads can be contacted only by playback tape. It is physically impossible for any part of the cartridge or tray assembly to touch the playback head in an Instacart. Therefore, alignment and adjustment of head assemblies, once set at the factory, are now a thing of the past.

**PRICES UPON APPLICATION**

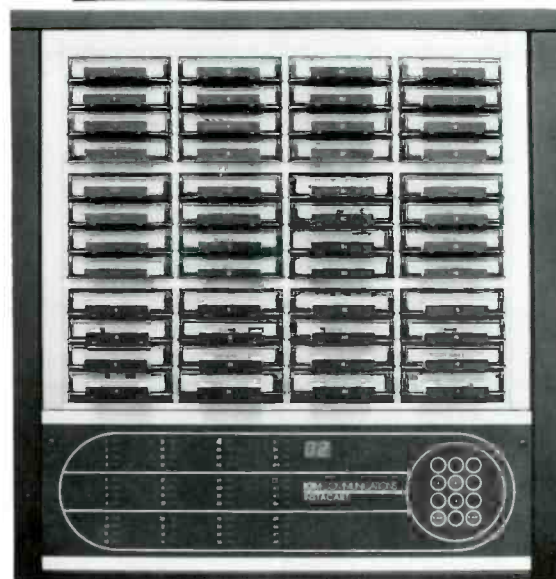

**EFI**

EFI offers power surge protection devices. The MA4 Panel Protection System is a modular assembly suppression system providing protection from transient over voltages and noise. The suppression networks incorporated into the MA4 are contained in separate plug-in modules allowing immediate replacement of a module in the event of damage or failure. Up to 3 modules (3 protected phases) and a spare module can be included in each panel. Remote supervision capability.

The EFI Power Strip utilizes the most advanced Hybrid technology (multi-stage, multimode) designed to protect today's sensitive electronic equipment/computer systems against catastrophic hardware failure, data and communication disruptions, and transient induced "bugs" that result in expensive down-time.

Avoid annoying and damaging electrical disturbances with the six outlet plug strip which incorporates one of three suppression networks selected by the customer, depending on the level of suppression desired, and provides protection for electronic equipment from high energy transient voltage spikes and surges. Single unit power surge protection devices also available.





**BEXT**

Phase Locked Loop FM exciters, available in mono or stereo, 87.5-108 MHz range feature:

- Advanced P.L.L. circuit design
- High modulation capability
- Ultra linear modulation oscillator which provides superior performance of any stereo and/or SCA transmission
- Direct and easy programmable frequency via thumb-wheel switches
- Broadband solid state chain amplifier to provide full power over entire FM band without tuning requirements
- Meets or exceeds all FCC and CCIR requirements

**MODEL**

|                     |                              |
|---------------------|------------------------------|
| <b>TEX 20</b> ..... | <b>starting at \$1995.00</b> |
| <b>PTX 20</b> ..... | <b>\$3495.00</b>             |
| <b>PTX 80</b> ..... | <b>\$4495.00</b>             |

**ALLIED PRICE \$ \_\_\_\_\_**



**TEX20**



**PTX20**



**PTX80**

**NEUMANN**

The **RSM 190i 'ZOOM' Stereo Microphone System** consists of microphone, windscreen, matrix amplifier, and connecting cables, packaged in a safe carrying case. It produces highly stable stereo images and focuses localization across the whole sound space. It also provides the operator with control over stereo width, perspective, and the ratio of direct to ambient sound. The side-signal pattern control optimizes the pickup for any changes in the recorded event.

The **RMS 190 Condenser Microphone** is the heart of a stereo shotgun system with variable directional characteristics, combined with high directional efficiency. It consists of two completely separate capsule assemblies.

The **MTX 190i Matrix Amplifier** enables gain adjustments of the side signal system relative to the middle system in six 3dB steps. This changes the width of the stereo image.

The **EA30B** elastic suspension mounts on the HG82 handle (shown) as well as on the SG82 swivel mount, which allows attachment to a floor stand or to 2 'Fishpole' (MA).

**PRICES UPON APPLICATION**



**RSM190**

**MTX190i**




**ALLIED**

**SCREWDRIVER SET**

- Precision Slots
- Shot peened tips
- Deluxe plastic handles
- Magnetized tips
- Regular & Phillips
- Drop forged chromevanadium

**11 PIECE SET.....ALLIED PRICE \$12.99**

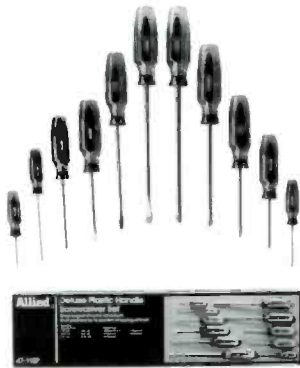

Screwdrivers


**REVERSIBLE RATCHET DRIVER SET**

- With storage box
- Screwdriver bits
- Hex bits
- Torx bits
- Socket set

**33 PIECE SET.....ALLIED PRICE \$10.98**



Ratchet Driver Set

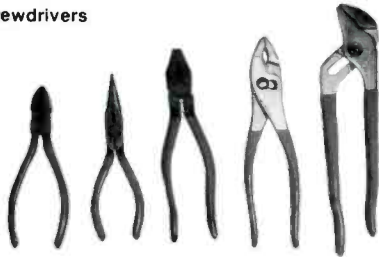

5 Pc. Plier Set

**PLIER SET**

- Drop forged
- Alloy heat treated steel
- Chrome plated and fully polished
- Vinyl cushion grips

**5 PIECE SET.....ALLIED PRICE \$15.00**



Glue Gun Kit

**HOT MELT GLUE GUN KIT**

- Bonds most materials in seconds
- Trigger operated flow control
- Dripless nozzle (standard)
- Wire stand
- Uses all 1/2" diameter glue sticks (12 glue sticks included)

**GLUE GUN KIT.....ALLIED PRICE \$20.00**



**Soldering Gun Kit  
\$49.00**

**150 WATT INSTANT HEAT SOLDERING IRON/TOOL KIT**

- Electric multi-tester
- 2 additional tips
- Precision pliers
- Soldering aid tools
- Heat sink

**PRECISION KNIFE SET**

- Unlimited cutting capabilities
- 15 replaceable blades
- Positive grip handles
- 4 different knives for use on light to heavy materials



**Precision Knife Kit  
\$20.00**

**ALLIED**


**TIE WRAPS**

200 -- 4" & 200 -- 8"  
(400 Pcs.)

or

100 Pcs. 17" Length

**THE ALLIED PRICE.....\$12.00 Pkg.**  
(Not for use outdoors)

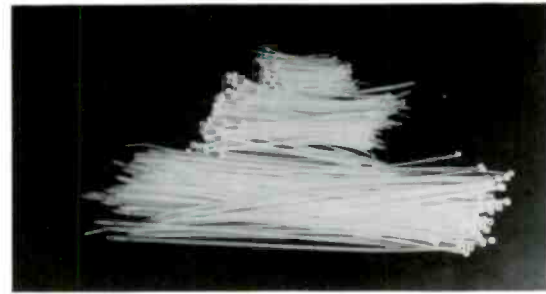

**CD JEWEL CASES**

Now is the time to replace all of those worn out cases!

**CALL FOR THE ALLIED PRICE**



**INDUSTRIAL BLADES**

Single edge industrial razor blades to fit all standard razor blade tools.

**THE ALLIED PRICE.....1,000 for \$59.00**



**CLEANING STICKS**

Cotton tipped swabs for lubricating and cleaning recorder heads and other hard to reach areas.

**THE ALLIED PRICE.....10,000 for \$52.00**




**TELEPHONE RECORDER PATCH**

For Merlin\* and other digital systems as well as most older analog systems with modular plugs.

- Adapts a tape recorder to either single or multiple line telephones for high fidelity recording of telephone reports.
- Simple plug-in installation.
- Provides clear recording of both sides of your conversations.
- For recording from the telephone . . . not for playback down the telephone line.

\*AT&T Trademark

**THE ALLIED PRICE.....\$47.95**

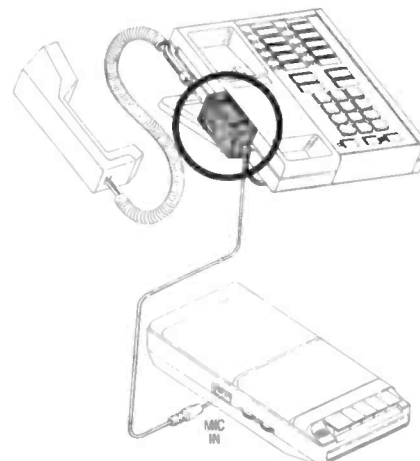



# INDEX

- A -

|   |                                    |
|---|------------------------------------|
| <b>ADC</b> .....  | 61                                 |
| <b>ADVANCED MICRODYNAMICS</b> .....   | 87                                 |
| <b>AKG</b> .....  | 66, 70                             |
| Headsets.....   | 66                                 |
| Microphones.....  | 70                                 |
| <b>ALC</b> .....  | 97                                 |
| <b>A-LINE</b> .....   | 49, 51-52, 56                      |
| Cart Racks.....   | 49                                 |
| Equipment Racks.....  | 51                                 |
| Turntable Bases.....  | 52                                 |
| Console Table, Desk.....  | 56                                 |
| <b>ALLIED</b>   |                                    |
| Equipment Exchange.....   | 17                                 |
| Broadcast Systems.....  | 20, 46                             |
| Cart Labels.....  | 28                                 |
| Broadcast Quartz.....   | 30                                 |
| Cart Rack, Copper.....  | 50                                 |
| Radio Base, Studio Package.....   | 53                                 |
| Record Storage Cabinets.....  | 56                                 |
| CD Jewel Cases.....   | 57                                 |
| Termination System.....   | 59                                 |
| Chair.....  | 60                                 |
| Studio Lights.....  | 62                                 |
| Jumper Cables.....  | 114                                |
| Screwdriver Set.....  | 136                                |
| Reversible Ratchet Driver Set.....  | 136                                |
| Plier Set.....  | 136                                |
| Hot Melt Glue Gun Kit.....  | 136                                |
| Soldering Iron/Tool Kit.....  | 136                                |
| Knife Set.....  | 136                                |
| Tie Wraps, CD Jewel Case, Blades, Cleaning<br>Sticks, Telephone Recorder Patch..... | 137                                |
| <b>AMPLIFIERS</b> .....   | 1-3                                |
| <b>ANCHOR</b> .....   | 98                                 |
| <b>ANDREW</b> .....   | 113                                |
| <b>APHEX</b> .....  | 5                                  |
| <b>ARIS</b> .....   | 109                                |
| <b>ARRAKIS</b> .....  | 34-35, 46                          |
| Consoles.....   | 34-35                              |
| Audio Routing Switchers.....  | 46                                 |
| <b>ASSOCIATE PRODUCER</b> .....   | 132                                |
| <b>ASTROLITE</b> .....  | 66                                 |
| <b>ATI</b> .....  | 2, 125                             |
| <b>ATLAS</b> .....  | 65                                 |
| <b>AUDICORD</b> .....   | 24-26                              |
| <b>AUDIO-DIGITAL</b> .....  | 15                                 |
| <b>AUDIOLAB</b> .....   | 29                                 |
| <b>AUDIOMETRICS</b> .....   | 26, 44, 64, 90, 107, 124, 126, 132 |
| Premium Plug-In Card.....   | 26, 132                            |
| Distribution Amp.....   | 44                                 |
| Mic Arms & Accessories.....   | 64                                 |
| Programmable CD Player.....   | 90                                 |
| DTD-5.....  | 107                                |
| TP-84.....  | 124                                |
| Tonearm.....  | 126                                |
| <b>AUDIO-TECHNICA</b> .....   | 41, 127                            |
| Portable Mixers.....  | 41                                 |
| Tonearm.....  | 127                                |
| <b>AUDITRONICS</b> .....  | 39, 45                             |
| Consoles.....   | 39                                 |
| Distribution Amps.....  | 45                                 |
| <b>AUTOGRAM</b> .....   | 37                                 |
| <b>AUTOMATION</b> .....   | 17-19                              |

- B -

|                                |            |
|--------------------------------|------------|
| <b>B &amp; B SYSTEMS</b> ..... | 79-80      |
| <b>BELAR</b> .....             | 74-75      |
| <b>BELDEN WIRE</b> .....       | 58         |
| <b>BENCHMARK</b> .....         | 131        |
| <b>BEXT</b> .....              | 135        |
| <b>BGW</b> .....               | 1, 44, 133 |
| Amplifiers.....                | 1          |
| Distribution Amp.....          | 44         |
| Pro Distribution Amp.....      | 133        |
| <b>BIRD</b> .....              | 118        |
| <b>BONNEVILLE</b> .....        | 43         |
| <b>BROADCAST AUDIO</b> .....   | 32         |

|   |                            |
|---|----------------------------|
| <b>BROADCAST DISC STORAGE, LTD.</b> ..... | 47                         |
| <b>BROADCAST ELECTRONICS</b> .....        | 22-24, 29, 33,<br>124, 126 |
| Cartridge Machines.....                   | 22-24                      |
| Cart Accessories.....                     | 29                         |
| Consoles.....                             | 33                         |
| Turntable.....                            | 124                        |
| Tone Arm.....                             | 126                        |
| <b>BROADCAST SYSTEMS DIVISION</b> .....   | 20                         |

- C -

|                                  |               |
|----------------------------------|---------------|
| <b>CABLEWAVE</b> .....           | 114           |
| <b>CAPITOL</b> .....             | 27            |
| <b>CART ACCESSORIES</b> .....    | 28-29         |
| <b>CARTRIDGE MACHINES</b> .....  | 21-27         |
| <b>CATEL</b> .....               | 130           |
| <b>CD MULTIPLAY</b> .....        | 19            |
| <b>CD PLAYERS</b> .....          | 128-129       |
| <b>CELWAVE</b> .....             | 114, 120      |
| Transmission Line.....           | 114           |
| Antennas.....                    | 120           |
| <b>CLEARCOM</b> .....            | 68            |
| <b>CLOCKS &amp; TIMERS</b> ..... | 30-31         |
| <b>COAXIAL DYNAMICS</b> .....    | 117           |
| <b>COMARK</b> .....              | 113, 114, 120 |
| Patch Panels, Switches.....      | 113           |
| Coaxial Transmission Line.....   | 114           |
| Antennas.....                    | 120           |
| <b>COMPUSONICS</b> .....         | 21            |
| <b>COMREX</b> .....              | 104-105       |
| <b>COMTECH</b> .....             | 93-94         |
| <b>CONEX</b> .....               | 17, 46        |
| Automation.....                  | 17            |
| Routing Switchers.....           | 46            |
| <b>CONSOLES</b> .....            | 32-40         |
| <b>COPPER</b> .....              | 50            |
| <b>CRL</b> .....                 | 6, 12, 95     |
| Processors.....                  | 6, 12         |
| SCA.....                         | 95            |
| <b>CROWN</b> .....               | 1, 2, 72, 121 |
| Amplifiers.....                  | 1, 2          |
| Microphones.....                 | 72            |
| Tuner.....                       | 121           |

- D -

|                                      |                     |
|--------------------------------------|---------------------|
| <b>DALE</b> .....                    | 131                 |
| <b>DAV TRONICS</b> .....             | 76                  |
| <b>DBX</b> .....                     | 7, 12               |
| Processors.....                      | 7                   |
| Noise Reduction.....                 | 12                  |
| <b>DELAY LINES</b> .....             | 15                  |
| <b>DELTA</b> .....                   | 77-78, 87, 113, 117 |
| Monitors, Controllers.....           | 77-78               |
| Remote Control, ATS System.....      | 87                  |
| Coaxial Transfer Switches.....       | 113                 |
| Stereo Generator/Monitor.....        | 117                 |
| <b>DENON</b> .....                   | 21, 112, 129        |
| CD Cart Player.....                  | 21, 129             |
| Test CD.....                         | 112                 |
| <b>DIGIMAX</b> .....                 | 110                 |
| <b>DISCWASHER</b> .....              | 122                 |
| <b>DISTRIBUTION AMPLIFIERS</b> ..... | 43-45               |
| <b>DUROTTEST</b> .....               | 119                 |

- E -

|                                  |                |
|----------------------------------|----------------|
| <b>EFI</b> .....                 | 134            |
| <b>ELECTRO-DUCT</b> .....        | 56             |
| <b>ELECTRO IMPULSE</b> .....     | 118            |
| <b>ELECTRONIC RESEARCH</b> ..... | 119            |
| <b>ELECTRO VOICE</b> .....       | 40, 42, 69, 96 |
| Console.....                     | 40             |
| Microphone Mixer.....            | 42             |
| Microphones.....                 | 69             |
| Speakers.....                    | 96             |
| <b>ELGIN</b> .....               | 108-109        |
| <b>ENBERG</b> .....              | 133            |
| <b>ENERGY-ONIX</b> .....         | 133            |

|                            |        |
|----------------------------|--------|
| <b>EQUALIZATION</b> .....  | 13-14  |
| <b>ESE</b> .....           | 31     |
| <b>EVENTIDE</b> .....      | 11, 15 |
| Harmonizers.....           | 11     |
| Delays.....                | 15     |
| <b>EXPRESS GROUP</b> ..... | 55     |

- F -

|   |                   |
|---|-------------------|
| <b>FAIRCHILD</b> .....                              | 94                |
| <b>FIDELIPAC</b> .....                              | 22, 27-29, 51, 62 |
| Cartridge Machines.....                             | 22                |
| Cartridges.....                                     | 27                |
| Degausers.....                                      | 28                |
| Eraser.....   | 29                |
| Cart Racks.....                                     | 51                |
| Studio Lights.....                                  | 62                |
| <b>FOSTEX</b> .....                                 | 96                |
| <b>FURNISHINGS</b> .....                            | 47-65             |
| CD Storage.....                                     | 47-48, 57         |
| Cart Racks.....                                     | 49-50, 51         |
| Copper.....   | 50                |
| Equipment Racks.....                                | 51                |
| Racks, Turntable Bases.....                         | 52                |
| Turntable, Isolator, Radio Base,<br>Studio Pkg..... | 53                |
| Cabinetry.....                                      | 54-55             |
| Desk, Duct, Record Storage.....                     | 56                |
| Tape Transport.....                                 | 57                |
| Wire, Mounting System.....                          | 58                |
| Termination Components.....                         | 59                |
| Switchpad, Chair, Punch Block,<br>Patch Panel.....  | 60-61             |
| Jackfield, Connectors.....                          | 61                |
| Studio Lights.....                                  | 62-63             |
| Mic Holders, Sonex.....                             | 63-64             |
| Mic Arms.....                                       | 64                |
| Hand Booms, Mic Stands.....                         | 65                |

- G -

|                               |                                |
|-------------------------------|--------------------------------|
| <b>GARNER</b> .....           | 28                             |
| <b>GENTNER</b> .....          | 42, 45, 60-61, 67, 86, 107-108 |
| Mixing Console.....           | 42                             |
| Program Switcher.....         | 45                             |
| Punch Block, Patch Panel..... | 60-61                          |
| Intercom.....                 | 67                             |
| Remote Control.....           | 86                             |
| Telephone.....                | 107-108                        |
| <b>GOLDLINE</b> .....         | 112                            |
| <b>GORMAN REDLICH</b> .....   | 76, 129                        |
| <b>GRAPHIC EXPRESS</b> .....  | 55                             |

- H -

|                           |                       |
|---------------------------|-----------------------|
| <b>HAFLER</b> .....       | 3                     |
| <b>HALLIKAINEN</b> .....  | 88-89                 |
| <b>HARRIS</b> .....       | 36, 102, 115-116, 120 |
| Consoles.....             | 36                    |
| STL.....                  | 102                   |
| Transmitters.....         | 115-116               |
| Antennas.....             | 120                   |
| <b>HEACO</b> .....        | 44                    |
| <b>HEADSETS</b> .....     | 66-67                 |
| <b>HENRY</b> .....        | 16, 124, 132          |
| Interface.....            | 16, 132               |
| Turntable Controller..... | 124                   |
| <b>H.O.M.E.</b> .....     | 52                    |

- I -

|                         |       |
|-------------------------|-------|
| <b>IGM</b> .....        | 134   |
| <b>INOVONICS</b> .....  | 76    |
| <b>INTERALIA</b> .....  | 109   |
| <b>INTERCOMS</b> .....  | 67-68 |
| <b>INTERFACES</b> ..... | 16    |

- J -

|                     |     |
|---------------------|-----|
| <b>JAMPRO</b> ..... | 120 |
| <b>JBL</b> .....    | 95  |

- K -

|                  |    |
|------------------|----|
| <b>KAY</b> ..... | 98 |
|------------------|----|

# INDEX

|   |   |  |
|---|---|--|
| <p><b>KEITH MONKS</b>.....65, 122, 133<br/>           Hand Booms.....65<br/>           Record Cleaning Machines.....122<br/>           Cable Drums.....133<br/> <b>KINTEK</b>.....3<br/> <b>KINTRONICS</b>.....119<br/> <b>KLARK-TEKNIK</b>.....14<br/> <b>KOHLER</b>.....98<br/> <b>KOSS</b>.....66</p> <p style="text-align: center;">- L -</p> <p><b>LARUS</b>.....60<br/> <b>LPB</b>.....38<br/> <b>LUXO</b>.....63</p> <p style="text-align: center;">- M -</p> <p><b>M/A COM</b>.....102<br/> <b>MARANTZ</b>.....85<br/> <b>MARK PRODUCTS</b>.....102<br/> <b>MARTI</b>.....2, 11, 91-92, 101-102<br/>           Amplifier.....2<br/>           Compressor/Limiter.....11<br/>           RPU.....91-92<br/>           STL.....101-102<br/> <b>McCURDY</b>.....112<br/> <b>MCI</b>.....113<br/> <b>MICRODYNE</b>.....93<br/> <b>MICROPHONES</b>.....69-73<br/> <b>MISCELLANEOUS</b>.....130-137<br/>           Modulators, Ulimeter.....130<br/>           Retrofit, Interface, Surge.....131<br/>           Turntable, Spool, Interface, Retrofit.....132<br/>           Dist. Amp, Enhancer, Cable Drums, Monitor.....133<br/>           Cartridge, Surge.....134<br/>           Exciters, Mic System.....135<br/>           Allied Tools/Kits.....136<br/>           Tie Wraps, CD Jewel Cases, Blades, Cleaning<br/>           Sticks, Telephone Recorder Patch.....137<br/> <b>MODULATION SCIENCES</b>.....8, 95<br/>           Processors.....8<br/>           Generator.....95<br/> <b>MODULUX</b>.....54<br/> <b>MONITORS</b>.....73-80<br/> <b>MONROE</b>.....93<br/> <b>MOSELEY</b>.....5, 87-88, 95, 100<br/>           Stereo Demodulator.....5<br/>           Remote Control.....87-88<br/>           SCA.....95<br/>           STL.....100<br/> <b>MOTOROLA</b>.....117<br/> <b>MPA</b>.....19</p> <p style="text-align: center;">- N -</p> <p><b>NAD</b>.....3, 121<br/>           Amplifier.....3<br/>           Tuner.....121<br/> <b>NEUMANN</b>.....71, 135<br/> <b>NOISE REDUCTION</b>.....12</p> <p style="text-align: center;">- O -</p> <p><b>OMNIMOUNT</b>.....58<br/> <b>ORBAN</b>.....4, 8, 13<br/>           Processors.....4, 8<br/>           Equalizers.....13<br/> <b>OTARI</b>.....21, 80-82<br/>           Cart Machines.....21<br/>           Recorders.....80-82</p> <p style="text-align: center;">- P -</p> <p><b>PI-ROD</b>.....119<br/> <b>PORTABLE MIXERS</b>.....41-43<br/> <b>POTOMAC</b>.....76-77, 88, 110, 121<br/>           Meters.....76<br/>           Monitors.....77<br/>           Remote Control.....88<br/>           Test Equipment.....110</p> | <p>Tuners.....121</p> <p style="text-align: center;">- Q -</p> <p><b>QEI</b>.....73, 117<br/>           Monitor/Test Set.....73<br/>           Exciter.....117</p> <p style="text-align: center;">- R -</p> <p><b>RAMKO</b>.....45<br/> <b>RANE</b>.....13, 66<br/>           Equalizer.....13<br/>           Rack Mount.....66<br/> <b>RAYTHEON</b>.....129<br/> <b>RECORDERS</b>.....81-86<br/> <b>REMOTE CONTROL</b>.....86-89<br/> <b>REVOX</b>.....83<br/> <b>ROBERT A. JONES</b>.....131<br/> <b>ROUTING SWITCHERS</b>.....45-46<br/> <b>RPU</b>.....91-92<br/> <b>RTS</b>.....16, 68, 125<br/>           Interface.....16<br/>           Intercoms.....68<br/>           Pre-Amp.....125<br/> <b>RUSLANG</b>.....57<br/> <b>RUSSCO</b>.....36, 43, 123-124, 126<br/>           Consoles.....36<br/>           Remote Mixer.....43<br/>           Turntables.....123-124<br/>           Pre-Amps.....126</p> <p style="text-align: center;">- S -</p> <p><b>SATELLITE</b>.....93-94<br/> <b>SCA</b>.....95<br/> <b>SCALA</b>.....102<br/> <b>SCOTCH AVX</b>.....28<br/> <b>SCOTCH CART</b>.....27<br/> <b>SCOTCH/3M</b>.....82<br/> <b>SENNHEISER</b>.....67, 71<br/>           Headsets.....67<br/>           Microphones.....71<br/> <b>SENTRY SYSTEMS</b>.....17<br/> <b>SHOCK ABSORBER</b>.....53<br/> <b>SHOCK THERAPY</b>.....220<br/> <b>SHURE</b>.....41, 73, 127-128<br/>           Portable Mixers.....41<br/>           Microphones.....73<br/>           Cartridges.....127-128<br/> <b>SIMPAC</b>.....51<br/> <b>SONEX</b>.....63<br/> <b>SONOMAG (SMC)</b>.....18<br/> <b>SONRISE</b>.....57<br/> <b>SONY</b>.....70, 128<br/>           Microphones.....70<br/>           CD Player.....128<br/> <b>SOUNDLIER</b>.....52<br/> <b>SPEAKERS</b>.....95-98<br/> <b>SPOOL TOOL</b>.....132<br/> <b>STANDBY POWER</b>.....98-99<br/> <b>STANTON</b>.....125<br/> <b>STATIONMASTER</b>.....37<br/> <b>STL</b>.....100-102<br/> <b>STUDER</b>.....128<br/> <b>STUDIO TECHNOLOGIES</b>.....5<br/> <b>SWITCHCRAFT</b>.....61<br/> <b>SYMETRIX</b>.....3, 106<br/>           Amplifier.....3<br/>           Telephone.....106</p> <p style="text-align: center;">- T -</p> <p><b>TAPECASTER</b>.....26, 29<br/>           Cartridge Machine.....26<br/>           Cartridge Winder.....29<br/> <b>TASCAM</b>.....40, 83-85, 128<br/>           Mixers.....40<br/>           Recorders.....83-85<br/>           CD Player.....128<br/> <b>TECHNICS</b>.....85-86, 122-123<br/>           CD Players.....85-86</p> | <p>Turntables.....122-123<br/> <b>TEKTRONIX</b>.....111<br/> <b>TELEMIX X</b>.....106<br/> <b>TELEPHONE</b>.....103-109<br/> <b>TELEX</b>.....67-68, 72, 133<br/>           Headsets.....67-68<br/>           Microphones.....72, 133<br/> <b>TELFAX</b>.....42<br/> <b>TELLABS</b>.....108<br/> <b>TELLABS MODULAR</b>.....44<br/> <b>TELNOX L-O</b>.....103<br/> <b>TEST EQUIPMENT</b>.....110-112<br/> <b>TEXAR</b>.....5<br/> <b>TFT</b>.....80, 86, 100<br/>           Monitors.....80<br/>           Remote Control.....86<br/>           STL.....100<br/> <b>TITUS</b>.....8, 11, 62-63<br/>           Processors.....8, 11<br/>           Studio Lights.....62-63<br/> <b>TOA</b>.....36, 96<br/>           Mixing Console.....36<br/>           Speaker.....96<br/> <b>TOPAZ</b>.....98<br/> <b>TRANSMISSION LINES</b>.....113-114<br/> <b>TRANSMITTING EQUIPMENT</b>.....115-120<br/> <b>TRISTECH AUDIO</b>.....16<br/> <b>TUNERS</b>.....121<br/> <b>TURNTABLES</b>.....122-128</p> <p style="text-align: center;">- U -</p> <p><b>ULTIMETER</b>.....130<br/> <b>UREI</b>.....2, 6, 14, 40<br/>           Amplifier.....2<br/>           Limiter.....6<br/>           Equalizers.....14<br/>           Consoles.....40</p> <p style="text-align: center;">- V -</p> <p><b>VALLEY INTERNATIONAL</b>.....6, 8-10, 16<br/>           Processors.....6, 8-10<br/>           Interface.....16<br/> <b>VEGA</b>.....72</p> <p style="text-align: center;">- W -</p> <p><b>WEATHER EQUIPMENT</b>.....129<br/> <b>WEGENER</b>.....94, 130<br/>           Receiver.....94<br/>           Modulator.....130<br/> <b>WENGER</b>.....97<br/> <b>WEST PENN WIRE</b>.....58<br/> <b>WHITE INSTRUMENTS</b>.....11<br/> <b>WVW CLOCK</b>.....30</p> <p style="text-align: center;">- Z -</p> <p><b>ZERCOM</b>.....16, 42<br/>           Interface.....16<br/>           Portable Mixer.....42</p> |
|---|---|--|

ALLIED CARRIES OVER  
 300 MANUFACTURER  
 LINES — IF YOU DON'T  
 SEE WHAT YOU WANT  
 IN THIS CATALOG —  
 CALL ONE OF OUR SIX  
 (6) OFFICES AND WE  
 WILL ENDEAVOR TO  
 SECURE IT FOR YOU!





## Terms and Conditions of Sale

**BY TELEPHONE:** The most convenient way to order from Allied is by telephone, confirmed with a written purchase order. When placing an order, call the Allied office that serves your area. (See inside back cover.) Allied provides toll free ordering service where possible - collect calls are not accepted. Office hours are 8 AM to 5 PM local time per office. Written purchase orders, sent to confirm a telephone order, must be noted as **CONFIRMING**. Failure to do so could result in additional charges for freight and handling.

**CREDIT TERMS:** We will ship open account, net 30 days firm, to firms **rated** "high" by Dun & Bradstreet. If only listed and **not** rated by D & B, Allied will require 3 vendor references, plus 1 bank reference. Any credit accommodations must be arranged through the Allied credit department. Orders and requests for credit accommodations should be placed with your local Allied sales office listed on the inside back cover. If in the judgment of Allied, the financial condition or payment record of the Buyer at any time does not justify placement/shipment of an order on the payment terms requested, Allied may refuse to accept/ship unless advance payment is received. Otherwise, payment terms are cash with order or chargeable to Visa, Master Card, American Express, or Discover with bank approval. Orders of significant value must be accompanied by a Security Agreement. COD orders - when authorized by Allied, require payment by cash, certified check, cashier's check or bank money order - **ONLY!**

**PARTIAL BILLING:** Payment is due Net/30 days firm on **each** invoice rendered. Due to time differential in shipment of various items, **each** invoice becomes due and payable within 30 days of the date of the invoice. If this is not possible, we will be glad to ship all equipment at one time with one invoice becoming due Net/30 days firm. Please advise which method is desired. Government funded purchase orders **must** include a copy of the instrument of funding. **ALLIED ACCEPTS NO PENALTY CLAUSES!**

**TRIALS & SALES ON APPROVAL:** Trials and sales on approval require a firm purchase order or payment in advance or deposit at our option unless otherwise specified. Approval terms are applicable only if specified in advance on the order and accepted by our Sales and Credit Department. Goods must be returned within the specified time on the invoice or the sale is considered final. Normal trial period is 21 days. Charges will be assessed for any damage or loss.

**LEASING:** Allied offers several Leasing Plans thru various companies which arrange to suit your individual needs in standard six month increments, from 12 months to 84 months. The customer is responsible for all taxes, transportation and insurance charges unless arranged in advance with the Leasing company. Under a Lease agreement, the customer pays for the use of the product for the term of the agreement. It is **not** a month-to-month rental . . . it is a non-cancelable, fixed term lease. At the expiration of the lease, there is the opportunity to update, or renew the existing lease, or to return the equipment to the leasing company. Customer may also exercise an option to purchase the equipment at any time during the term of the lease, provided thirty (30) day written notice of his intention is given. A **portion** of the installments will be credited toward the purchase price as negotiated with the leasing company.

**USED EQUIPMENT:** Used equipment offered and purchased "as-is, no-return," must be paid for in advance or sent COD. The customer will buy at his own risk. Allied may authorize returns on repaired used equipment within 10 days of delivery for which the customer will be credited full amount of purchase, less all shipping and packing charges.

**BACK ORDERS:** Items ordered that are temporarily out of stock, will be placed on backorder.

**TAXES:** Allied shall invoice and you agree to pay all required taxes or other like charges required to be collected by Allied with regard to transactions between seller and purchaser with specific reference to state and local taxes imposed by law in the various States, Commonwealth and Protectorates of the United States. Firms operating under tax-free conditions must state applicable license certificate or contract numbers and be prepared to furnish necessary certificates of proof. Allied **will** collect state sales taxes as applicable unless tax exempt documents are provided.

**SHIPMENT:** Your order will be shipped via UPS, if possible. Otherwise, equipment will be shipped via Truck or Air Freight. If you require a special or particular form of shipment, please specify. Please be aware that there are insurance limitations on certain forms of shipments and that we may not be able to follow your exact shipping requests due to limitations on services available in various parts of the country and tariff restrictions. Allied will make every effort to ship your merchandise in a fast and inexpensive manner. Merchandise in stock will usually be shipped within 24 hours of receipt of order. If it is a drop shipment from the manufacturer, a request will be made via telephone to expedite shipment. Pickups are made several times a day from our facility to expedite service. Please allow extra time for truck shipments. Overnight shipments arranged (as requested).

**GUARANTEE:** Since the seller, Allied Broadcast Equipment, does not control the use of its products, there are no express warranties which extend beyond the description contained herein. Seller disclaims any implied war-

rancies of merchantability or of fitness for any particular purpose. Since seller cannot control the manner or use of products after their sale, seller will not be responsible for any consequential or indirect damages. Since Allied is only acting as a distributor of products manufactured by other companies, Allied expressly limits its liabilities to any warranty extended by the manufacturer, which guarantees seller will pass through to the customer. Many parts and replacement units are available from our stock or will be expedited from the manufacturer at Allied's option. Allied or the manufacturer will, at their option, repair defective parts or merchandise in warranty. No warranty will apply if products are in any way altered or modified by the user after delivery by Allied.

**REPAIRS & WARRANTY SERVICE:** Contact our Customer Service Dept. at 317-962-8596 for instructions on repair. **DO NOT** return goods without a **Return Authorization Number** and make sure proper documentation is enclosed stating the problem encountered. If you feel your problem can be solved by conversation with a technician, please ask our Customer Service Dept. to connect you with the Repair Dept.

**CLAIMS & RETURNS:** Inspect all shipments immediately upon receipt. Missing cartons or obvious damage to cartons, shipped by common carrier, should be noted on the delivery receipt. Concealed damage or loss should be reported at once to the carrier and an inspection requested. Losses or damage to all other shipments should be reported to our Customer Service Dept. All claims for shortage or damage must be made within two days after receipt of shipment. Claims for lost shipments must be made within 10 days of receipt of invoice or other notification of shipment. Save damaged or pilfered cartons until claim is settled. Do not return any goods to Allied without obtaining a **Return Authorization Number** and instructions from us. Goods returned unauthorized by collect freight will be refused. Returned items with scratches, dents, literature and parts missing, etc., subject to minimum 30% restocking charge. Goods returned which were ordered by customers in **error** are subject to a 20% restocking charge. Replacement goods shipped before defective goods are returned to Allied will be billed at time of shipment. Credit will be given at time of receipt of defective goods by Allied.

**IMPORTANT -** Under present rules and regulations by most carriers it is the end user's responsibility to inspect and report losses and damage. It is essential you follow correct procedure in applying for claims and most of all, do it promptly to protect your interests.

**DELIVERY:** Any delivery dates indicated are approximate and subject to availability of inventory and refer to the date on which the goods will be ready for dispatch from our warehouse and/or the manufacturer. The delivery time/date indicated is without obligation insofar as it may be delayed due to labor difficulties, fires, casualties, accidents, acts of the elements, acts of the public enemy, transportation difficulties, acts of the Government in its sovereign capacity; in the event of non-compliance with our terms of payment, or other causes beyond Allied control. **Allied accepts no penalty clauses.**

**PRICES:** Prices found in this catalog are understood to be domestic only and in U.S. dollars; they are the suggested manufacturers price, and **are** subject to change or correction without notice. As such, the prices serve as a basis for orders and are **not** offered as quotations. When definite quotations are necessary, please call, write or consult our sales representative at the nearest Allied office (reference inside back cover). All applicable local, State or Federal taxes of any nature must be added to quoted prices, unless previously defined as included. All prices are FOB place of shipment, exclusive of freight charges; therefore shipping charges to your destination will be paid by the buyer, unless otherwise stated.

**PERSONAL SERVICE:** Regardless of quantity, it's our Company policy to treat each order and inquiry as a person-to-person encounter. Your questions, comments and criticisms are welcome. Our staff is made up entirely of professionals willing to give you helpful assistance and work out possible problems to your full satisfaction.

**CORPORATE REFERENCES & POLICIES:** Allied Broadcast Equipment is an Indiana Corporation which has been in business since 1966. It is our sincere desire to give the broadcast and recording industry the best possible service anywhere. Please direct any comments concerning service and policy to . . . **President, Allied Broadcast Equipment, PO Box 1487, Richmond, Indiana, 47375 USA.**

**NO INSTALLATION:** Installation is not included. Certain items do not come factory-assembled and Allied makes no representation to the contrary. Installation is available at extra charge on most items and packages.

**NOTE:** Prices are manufacturer suggested list and are for reference only. Discounts are available to qualified clients on many items. Freight and handling charges will be added to all shipments. Prices subject to change without notice. Typographical and clerical errors are subject to correction. Illustrations, drawings and descriptions contained in our catalogs, quotes, contracts and brochures, as well as indicated measurements and weights, are subject to changes without notice due to technical improvements or modifications. All terms and conditions defined in above paragraphs supersede and replace **all** previously printed catalog terms and conditions.



# ALLIED

## Broadcast Equipment

3712 NATIONAL ROAD WEST • P.O. BOX 1487 • RICHMOND, INDIANA 47375 • (317) 962-8596

Following are conditions required by Allied as a prerequisite to our opening an account for your Company on a net 30 day basis:

- A. That your company will pay it's obligations to Allied Net 30 days firm on each and every invoice.
- B. That you will pay a finance charge of 1.5% on any unpaid balance which exceeds 30 days of invoice.
- C. That you understand any ordered product/equipment remains the property of Allied Broadcast Equipment until it is paid for in full.
- D. That, unless other arrangements are made on a sale-to-sale basis, you will pay all freight and any required deposits for all transactions.
- E. That manufacturer's warranties prevail and begin on the day the product/equipment is invoiced.

The authorized signature below constitutes your agreement to Allied's condition of sale on a Credit basis.

\_\_\_\_\_  
Signed

\_\_\_\_\_  
Title

\_\_\_\_\_  
Date

\_\_\_\_\_  
Please type or print

**Both sides of this form must be completed and signed.**

TELEX 380474 • FAX 317-962-8961 • EZ LINK 621-267 20+ • TTY DDD 317-935-7466

**COMPANY CREDIT APPLICATION**



3712 National Road West • P.O. Box 1487 • Richmond, IN. 47375 • PHONE (317) 962-8596

[ ]  
[ ]

Your cooperation in providing the following confidential information will help us to establish your new company account and better serve your future business needs. Thank you.

Firm name &/or Call letters \_\_\_\_\_

Parent company, owner's or partner's name \_\_\_\_\_

Address \_\_\_\_\_ Telephone \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

This location since \_\_\_\_\_ Type of Business \_\_\_\_\_

Incorporated?  Yes  No      D & B Rated?  Yes  No

\$ \_\_\_\_\_

**Please list trade references that are applicable to Electronics & Radio**

Bank reference \_\_\_\_\_ Contact name: \_\_\_\_\_

Address \_\_\_\_\_ Account No. \_\_\_\_\_

City \_\_\_\_\_ State & Zip \_\_\_\_\_ Telephone \_\_\_\_\_

Trade reference \_\_\_\_\_ Contact name \_\_\_\_\_

Address \_\_\_\_\_ Account No. \_\_\_\_\_

City \_\_\_\_\_ State & Zip \_\_\_\_\_ Telephone \_\_\_\_\_

Trade reference \_\_\_\_\_ Contact name \_\_\_\_\_

Address \_\_\_\_\_ Account No. \_\_\_\_\_

City \_\_\_\_\_ State & Zip \_\_\_\_\_ Telephone \_\_\_\_\_

**This form must be signed front and back**


I hereby grant permission to you to verify this information with these references.

Signed \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

# The United States of ALLIED

**Order  
Toll-Free**

**Please  
Call  
The  
Number  
For Your State**

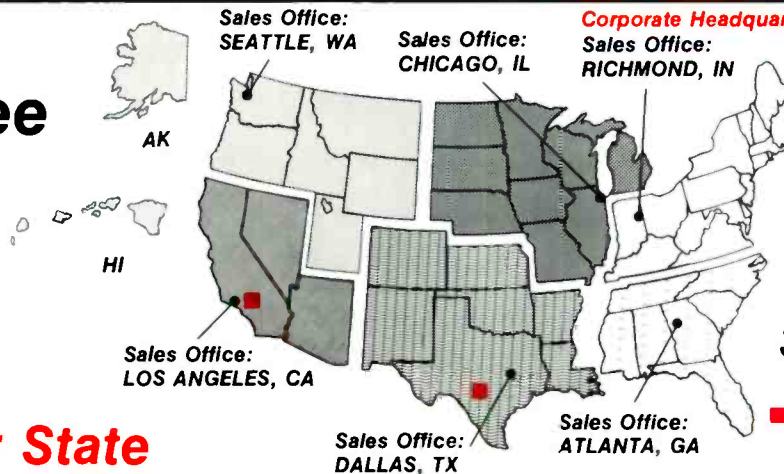

**Customer  
Service  
and  
Repair  
317-962-8596**

## **RICHMOND, IN Sales Office**

**Serving:**  
Connecticut  
Delaware  
Indiana  
Kentucky  
Maine  
Maryland  
Massachusetts  
New Hampshire  
New Jersey  
New York  
Ohio  
Pennsylvania  
Rhode Island  
Vermont  
Virginia  
West Virginia

3712 National Road West  
P.O. Box 1487  
Richmond, IN 47375 USA

|                         |                 |                     |
|-------------------------|-----------------|---------------------|
| <b>ORDERS</b>           | <b>INDIANA</b>  | <b>800-382-6907</b> |
| <b>ALL OTHER STATES</b> | <b>ORDERS</b>   | <b>800-428-6954</b> |
| <b>INQUIRIES</b>        | <b>FAX</b>      | <b>317-962-8596</b> |
| <b>FAX</b>              | <b>Telex II</b> | <b>317 962 8961</b> |
| <b>Telex I</b>          | <b>Telex I</b>  | <b>810 345 1394</b> |
| <b>W.U.EZ Link</b>      | <b>Telex I</b>  | <b>380474</b>       |
| <b>TTY DDD</b>          | <b>INT'L</b>    | <b>621 267 20 +</b> |
| <b>INT'L</b>            |                 | <b>317 935 7466</b> |
|                         |                 | <b>317-935-1704</b> |

## **ATLANTA, GA Sales Office**

**Serving:**  
Alabama  
Florida  
Georgia  
Mississippi  
North Carolina  
South Carolina  
Tennessee

Shannon Towers, 4405 Mall Blvd.  
Suite 125, Union City, GA 30291

|                         |                |                     |
|-------------------------|----------------|---------------------|
| <b>ORDERS</b>           | <b>GEORGIA</b> | <b>800-282-0246</b> |
| <b>ALL OTHER STATES</b> | <b>ORDERS</b>  | <b>800-241-0192</b> |
| <b>INQUIRIES</b>        | <b>FAX</b>     | <b>404-964-1464</b> |
| <b>FAX</b>              |                | <b>404 964 2820</b> |

## **SEATTLE, WA Sales Office**

**Serving:**  
Alaska  
Hawaii  
Idaho  
Montana  
Oregon  
Utah  
Washington  
Wyoming

33430 13th Place South, Suite 120  
Federal Way, WA 98003

|                         |                   |                     |
|-------------------------|-------------------|---------------------|
| <b>ORDERS</b>           | <b>WASHINGTON</b> | <b>800-562-8178</b> |
| <b>ALL OTHER STATES</b> | <b>ORDERS</b>     | <b>800-426-9781</b> |
| <b>INQUIRIES</b>        | <b>FAX</b>        | <b>206-838-2705</b> |
| <b>FAX</b>              |                   | <b>206 952 8567</b> |

## **CHICAGO, IL Sales Office**

**Serving:**  
Illinois  
Iowa  
Michigan  
Minnesota  
Missouri  
Nebraska  
North Dakota  
South Dakota  
Wisconsin

5215 Old Orchard Rd., Suite 970  
Skokie, IL 60077

|                         |                 |                     |
|-------------------------|-----------------|---------------------|
| <b>ORDERS</b>           | <b>ILLINOIS</b> | <b>800-572-9138</b> |
| <b>ALL OTHER STATES</b> | <b>ORDERS</b>   | <b>800-621-3726</b> |
| <b>INQUIRIES</b>        | <b>FAX</b>      | <b>312-470-0303</b> |
| <b>FAX</b>              |                 | <b>312 470 9017</b> |

## **LOS ANGELES, CA Sales Office**

**Serving:**  
Arizona  
California  
Nevada

3808 Riverside Drive  
Suite 303  
Burbank, CA 91505

|                         |                   |                     |
|-------------------------|-------------------|---------------------|
| <b>ORDERS</b>           | <b>CALIFORNIA</b> | <b>800-523-8407</b> |
| <b>ALL OTHER STATES</b> | <b>ORDERS</b>     | <b>800-231-2304</b> |
| <b>INQUIRIES</b>        | <b>FAX</b>        | <b>818-843-5052</b> |
| <b>FAX</b>              |                   | <b>818 843 5145</b> |

## **DALLAS, TX Sales Office**

**Serving:**  
Arkansas  
Colorado  
Kansas  
Louisiana  
New Mexico  
Oklahoma  
Texas

Richardson Credit Union Bldg.  
1101 East Plano Parkway, Suite B  
Plano, TX 75074

|                         |               |                     |
|-------------------------|---------------|---------------------|
| <b>ORDERS</b>           | <b>TEXAS</b>  | <b>800-442-4741</b> |
| <b>ALL OTHER STATES</b> | <b>ORDERS</b> | <b>800-527-4392</b> |
| <b>INQUIRIES</b>        | <b>FAX</b>    | <b>214-423-8667</b> |
| <b>FAX</b>              |               | <b>214 578 9162</b> |

- ★ Satellite Equipment Catalog Available
- ★ Canada Catalog Available
- ★ International Catalog Available
- ★ Telecommunications Catalog Available

**EMERGENCY**  
RF & SATELLITE FAILURES  
AFTER HRS. & WEEKENDS  
**(317) 935-0455**

**ALLIED**  
Broadcast Equipment

INTERNATIONAL INQUIRIES and ORDERS from outside the 50 United States are received at Richmond address above or (U.S.) 317-935-1704, Telex 380474, FAX 317-962-8961. PRICES in this catalog are U.S. Domestic only. Prices & specifications are subject to change without notice.

PRINTED IN U.S.A.

COPYRIGHT ©1987 ALLIED BROADCAST EQUIPMENT



The **FULL SERVICE** Broadcast People

---

---

**ALLIED**   
Broadcast Equipment

— CORPORATE OFFICE —  
Richmond, IN 47375