

BBC

ENGINEERING DIVISION

MONOGRAPH

NUMBER 65: DECEMBER 1966

Tristimulus spot colorimeter

by

H. A. S. PHILIPPART, A.M.I.E.R.E.
(Research Department, BBC Engineering Division)

DEPT. COPY
LIBRARY
DESIGNS

BRITISH BROADCASTING CORPORATION

PRICE FIVE SHILLINGS



BBC ENGINEERING MONOGRAPH

No. 65

TRISTIMULUS SPOT COLORIMETER

by

H. A. S. Philippart, A.M.I.E.R.E.

(Research Department, BBC Engineering Division)

DECEMBER 1966

BRITISH BROADCASTING CORPORATION

FOREWORD

THIS is one of a series of Engineering Monographs published by the British Broadcasting Corporation. About six are produced every year, each dealing with a technical subject within the field of television and sound broadcasting. Each Monograph describes work that has been done by the Engineering Division of the BBC and includes, where appropriate, a survey of earlier work on the same subject. From time to time the series may include selected reprints of articles by BBC authors that have appeared in technical journals. Papers dealing with general engineering developments in broadcasting may also be included occasionally.

This series should be of interest and value to engineers engaged in the fields of broadcasting and of telecommunications generally.

Individual copies cost 5s. post free, while the annual subscription is £1 post free. Orders can be placed with newsagents and booksellers, or BBC PUBLICATIONS, 35 MARYLEBONE HIGH STREET, LONDON, W.1.

CONTENTS

<i>Section</i>	<i>Title</i>	<i>Page</i>
	PREVIOUS ISSUES IN THIS SERIES	4
	SUMMARY	5
1.	INTRODUCTION	5
2.	DESCRIPTION	8
3.	ANALYSING FILTERS	12
4.	CALIBRATION	12
5.	PERFORMANCE	16
6.	CONCLUSIONS	16
7.	REFERENCES	16
	APPENDIX	16
	Tristimulus Colorimeter Filters	

PREVIOUS ISSUES IN THIS SERIES

No.	Title	Date
1.	<i>The Suppressed Frame System of Telerecording</i>	JUNE 1955
2.	<i>Absolute Measurements in Magnetic Recording</i>	SEPTEMBER 1955
3.	<i>The Visibility of Noise in Television</i>	OCTOBER 1955
4.	<i>The Design of a Ribbon Type Pressure-gradient Microphone for Broadcast Transmission</i>	DECEMBER 1955
5.	<i>Reproducing Equipment for Fine-groove Records</i>	FEBRUARY 1956
6.	<i>A V.H.F./U.H.F. Field-strength Recording Receiver using Post-detector Selectivity</i>	APRIL 1956
7.	<i>The Design of a High Quality Commentator's Microphone Insensitive to Ambient Noise</i>	JUNE 1956
8.	<i>An Automatic Integrator for Determining the Mean Spherical Response of Loudspeakers and Microphones</i>	AUGUST 1956
9.	<i>The Application of Phase-coherent Detection and Correlation Methods to Room Acoustics</i>	NOVEMBER 1956
10.	<i>An Automatic System for Synchronizing Sound on Quarter-inch Magnetic Tape with Action on 35-mm Cinematograph Film</i>	JANUARY 1957
11.	<i>Engineering Training in the BBC</i>	MARCH 1957
12.	<i>An Improved 'Roving Eye'</i>	APRIL 1957
13.	<i>The BBC Riverside Television Studios: The Architectural Aspects</i>	JULY 1957
14.	<i>The BBC Riverside Television Studios: Some Aspects of Technical Planning and Equipment</i>	OCTOBER 1957
15.	<i>New Equipment and Methods for the Evaluation of the Performance of Lenses of Television</i>	DECEMBER 1957
16.	<i>Analysis and Measurement of Programme Levels</i>	MARCH 1958
17.	<i>The Design of a Linear Phase-shift Low-pass Filter</i>	APRIL 1958
18.	<i>The BBC Colour Television Tests: An Appraisal of Results</i>	MAY 1958
19.	<i>A U.H.F. Television Link for Outside Broadcasts</i>	JUNE 1958
20.	<i>The BBC's Mark II Mobile Studio and Control Room for the Sound Broadcasting Service</i>	AUGUST 1958
21.	<i>Two New BBC Transparencies for Testing Television Camera Channels (Out of Print)</i>	NOVEMBER 1958
22.	<i>The Engineering Facilities of the BBC Monitoring Service</i>	JANUARY 1959
23.	<i>The Crystal Palace Band I Television Transmitting Aerial</i>	FEBRUARY 1959
24.	<i>The Measurement of Random Noise in the presence of a Television Signal</i>	MARCH 1959
25.	<i>A Quality-checking Receiver for V.H.F./F.M. Sound Broadcasting</i>	JUNE 1959
26.	<i>Transistor Amplifiers for Sound Broadcasting</i>	AUGUST 1959
27.	<i>The Equipment of the BBC Television Film Studios at Ealing</i>	JANUARY 1960
28.	<i>Programme Switching, Control, and Monitoring in Sound Broadcasting</i>	FEBRUARY 1960
29.	<i>A Summary of the Present Position of Stereophonic Broadcasting</i>	APRIL 1960
30.	<i>Film Processing and After-processing Treatment of 16-mm Films</i>	MAY 1960
31.	<i>The Power Gain of Multi-tiered V.H.F. Transmitting Aerials</i>	JULY 1960
32.	<i>A New Survey of the BBC Experimental Colour Transmissions</i>	OCTOBER 1960
33.	<i>Sensitometric Control in Film Making</i>	DECEMBER 1960
34.	<i>A Mobile Laboratory for UHF and VHF Television Surveys</i>	FEBRUARY 1961
35.	<i>Tables of Horizontal Radiation Patterns of Dipoles Mounted on Cylinders</i>	FEBRUARY 1961
36.	<i>Some Aspects of Optical Lens Performance</i>	APRIL 1961
37.	<i>An Instrument for Measuring Television Signal-to-noise Ratio</i>	JUNE 1961
38.	<i>Operational Research on Microphone and Studio Techniques in Stereophony</i>	SEPTEMBER 1961
39.	<i>Twenty-five Years of BBC Television</i>	OCTOBER 1961
40.	<i>The Broadcasting of Music in Television</i>	FEBRUARY 1962
41.	<i>The Design of a Group of Plug-in Television Studio Amplifiers</i>	APRIL 1962
42.	<i>Apparatus for Television and Sound Relay Stations</i>	JULY 1962
43.	<i>Propagational Factors in Short-wave Broadcasting</i>	AUGUST 1962
44.	<i>A Band V Signal-frequency Unit and a Correlation Detector for a VHF/UHF Field-strength Recording Receiver</i>	OCTOBER 1962
45.	<i>Vertical Resolution and Line Broadcasting</i>	DECEMBER 1962
46.	<i>The Application of Transistors to Sound Broadcasting</i>	FEBRUARY 1963
47.	<i>Vertical Aperture Correction using Continuously Variable Ultrasonic Delay Lines</i>	MAY 1963
48.	<i>The Development of BBC Internal Telecommunications</i>	MAY 1963
49.	<i>Apparatus for Measurement of Non-linear Distortion as a Continuous Function of Frequency</i>	JULY 1963
50.	<i>New Methods of Lens Testing and Measurement</i>	SEPTEMBER 1963
51.	<i>Radiophonics in the BBC</i>	NOVEMBER 1963
52.	<i>Stereophony: the effect of cross-talk between left and right channels</i>	MARCH 1964
53.	<i>Aerial distribution systems for receiving stations in the l.f., m.f., and h.f. bands</i>	JULY 1964
54.	<i>An Analysis of Film Granularity in Television Reproduction</i>	AUGUST 1964
55.	<i>A Review of Television Standards Conversion</i>	NOVEMBER 1964
56.	<i>Stereophony: the effect of interchannel differences in the phase/frequency and amplitude/frequency characteristics</i>	DECEMBER 1964
57.	<i>Drop-out in Video-tape Recording</i>	JUNE 1965
58.	<i>Sine-squared pulse and bar testing in colour television</i>	AUGUST 1965
59.	<i>The acoustic design and performance of a new free-field sound measurement room</i>	SEPTEMBER 1965
60.	<i>Colorimetric Analysis of Interference in Colour Television</i>	FEBRUARY 1966
61.	<i>Sporadic E Ionization and Television Interference</i>	MARCH 1966
62.	<i>Automatic monitoring</i>	APRIL 1966
63.	<i>The design of transmission lines and single-stage switching circuits for a line-store standards converter</i>	MAY 1966
64.	<i>Data for the acoustic design of studios</i>	NOVEMBER 1966

TRISTIMULUS SPOT COLORIMETER

SUMMARY

The report describes a photoelectric tristimulus spot colorimeter which measures the three stimuli X, Y, Z, as specified by the C.I.E. (Commission Internationale de l'Eclairage) standard observer, and thus permits simple calculation of the x and y trichromatic coefficients (chromaticity co-ordinates).

In addition to the usual measurements of the colours of materials, the instrument permits measurements of the colours displayed on cathode-ray tube monitors; no such instrument is commercially available. The sensitivity of the instrument is sufficient to permit the measurement of colour at the low luminance levels often encountered in colour television pictures. Further, the narrow acceptance angle of the optical system enables the colour of small areas to be measured at convenient distances from the object.

The dimensions of the instrument are such that, with a power supply unit and meter, the whole instrument is contained in a portable case 41 cm × 36 cm × 15 cm (16 in. × 14 in. × 6 in.).

1. Introduction

Assessment of the fidelity of colour reproduction in television usually consists of a number of subjective judgements carried out by the unaided eye. As such, it is subject to wide errors, being dependent on the observer's previous experience, the chromatic composition of the image or scene, the effects of simultaneous contrast, etc. These effects may be known to the observer; nevertheless his judgement may well be impaired.

One of the most sensitive and most accurate methods of assessment of colour is the 'side by side' or matching method using the unaided eye. Whereas this is easily carried out when comparing samples of material, it cannot be used safely with composite pictures; further, it does not give quantitative information, unless comparison samples such as Munsell chips are calibrated beforehand by spectrophotometric means. Colour-picture assessments by the comparison method have often been carried out using duplicate colour slides, one being televised and displayed on a monitor while the duplicate is projected by optical means using a light source whose colour temperature is equal to that of the monitor white. This method has two main drawbacks. First, it is not always easy to obtain exactly identical slides and, secondly, no quantitative colour values are obtained.

Attempts to compare a studio scene with its reproduction displayed on a colour television monitor are subject to gross inaccuracies, as the eye cannot adapt itself easily to allow for changes in chromaticity due to different illuminants and for different levels of illumination.

In order to study the characteristics of a complex colour television chain it is essential that quantitative measurements be made in order to assess the magnitude and location of colour errors in the final picture. The tristimulus spot colorimeter described in this monograph has been developed to fulfil a definite requirement not satisfied by other measuring instruments^{1,2} which are, in general, unsuitable for making objective colour measurements on pictures displayed on a shadow-mask cathode-ray tube.

Human vision may be considered trichromatic at light levels in excess of (say) 3 cd/m² (0.9 ft-L) and the standard

observer can be defined by three spectral characteristics, \bar{x} , \bar{y} , and \bar{z} as stipulated by the International Commission on Illumination (or C.I.E.).³ These curves are shown in Fig. 1 and show the relative amounts of light from each of the three unrealizable primary sources which, when mixed, will produce light of a colour that matches the pure spectrum colour of wavelength noted on the abscissa. The three amounts of light are the 'tristimulus values', noted as X, Y, and Z.

In order to define the chromaticity of a light, only the relative values of X, Y, and Z are necessary. Chromaticity is usually expressed in terms of trichromatic coefficients x and y, which are defined as:

$$x = \frac{X}{X + Y + Z} \qquad y = \frac{Y}{X + Y + Z}$$

The tristimulus colorimeter is therefore required to measure the three stimuli X, Y, and Z.^{2,3}

In order to reproduce the characteristics shown in Fig. 1 three methods could be used:

- (a) A dispersing system with three templates² to select correct proportions of the light at each wavelength.
- (b) Three photocells of known spectral response each fitted with suitable filters.
- (c) Three colour filters in conjunction with a single photocell of known spectral response.

Method (a) results in a very bulky and complex instrument requiring extremely high mechanical stability and very accurate shaping of the three templates, but it does offer the possibility of almost exactly achieving the necessary response. Method (b) is also fairly bulky and requires high electrical stability as three photocells are employed. Method (c) is the most suitable in terms of simplicity and reliability, even though it does not easily achieve the accuracy of Method (a); it can also be adapted to the specified requirements of portability and sensitivity.

There are, however, two major difficulties to the achievement of the ideal tristimulus colorimeter of this type. The first may be appreciated by reference to Fig. 1 where the spectral characteristic of \bar{x} is seen to consist of two pass-

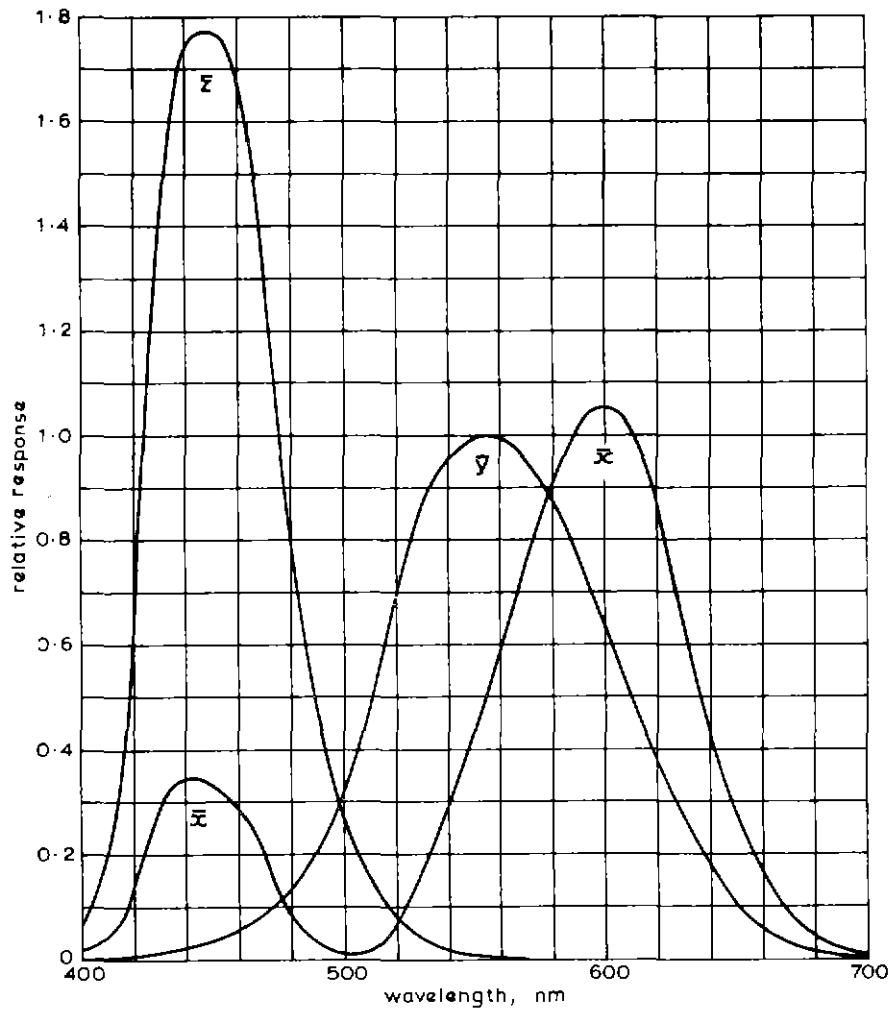


Fig. 1 — Characteristics of C.I.E. standard observer

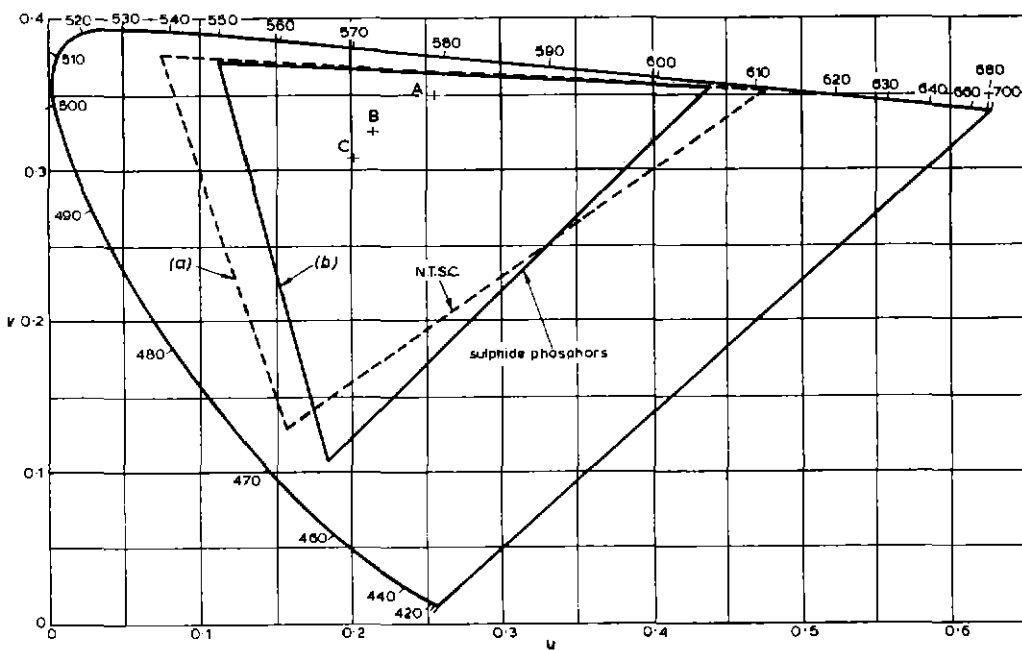


Fig. 2 — Colour gamuts of a display used

(a) the NTSC phosphors
(b) the sulphide group of phosphors

bands which would require a compound filter whose characteristic consisted of a combination of two different spectral characteristics with the appropriate relative areas; this results in a complex filter assembly unsuitable for an instrument of the type envisaged. To overcome this difficulty \bar{x} is synthesized by two separate filters and the two experimental readings are added.

The second difficulty is that due to the limited range of filter material available, whether it be made from gelatine, celluloid, glass, or be of the multi-layer dielectric type. This difficulty may be overcome by stacking several filters of different characteristics so as to obtain the required characteristic, but this, in turn, results in heavy absorption which, added to the fact that measurements of small areas are required, makes it essential that a multiplier photocell be used. The E.M.I.9524F photomultiplier tube has the required sensitivity, spectral response and consistency of

characteristic (between specimens of nominally the same tube).

The above considerations show that the whole approach to the synthesis of \bar{x} , \bar{y} , and \bar{z} characteristics can only be an approximation; nevertheless good accuracy can be achieved over a gamut large enough to cover all types of colour reproduction work, including colour television, which has the largest gamut (Fig. 2).^{*} A useful accuracy is also obtained for absolute measurements over the whole C.I.E. locus. When used for comparison of colours which have similar chromaticities the accuracy is easily sufficient for most practical purposes. In fact, only for the most exacting work should it be necessary to use a reference

^{*} The chromaticity diagram used here is a modification of the original 'xy' diagram proposed in 1931; it has the advantage of being an approximately uniform-chromaticity diagram, i.e. equal distances represent approximately equal perceptible chromaticity differences (at constant luminance).

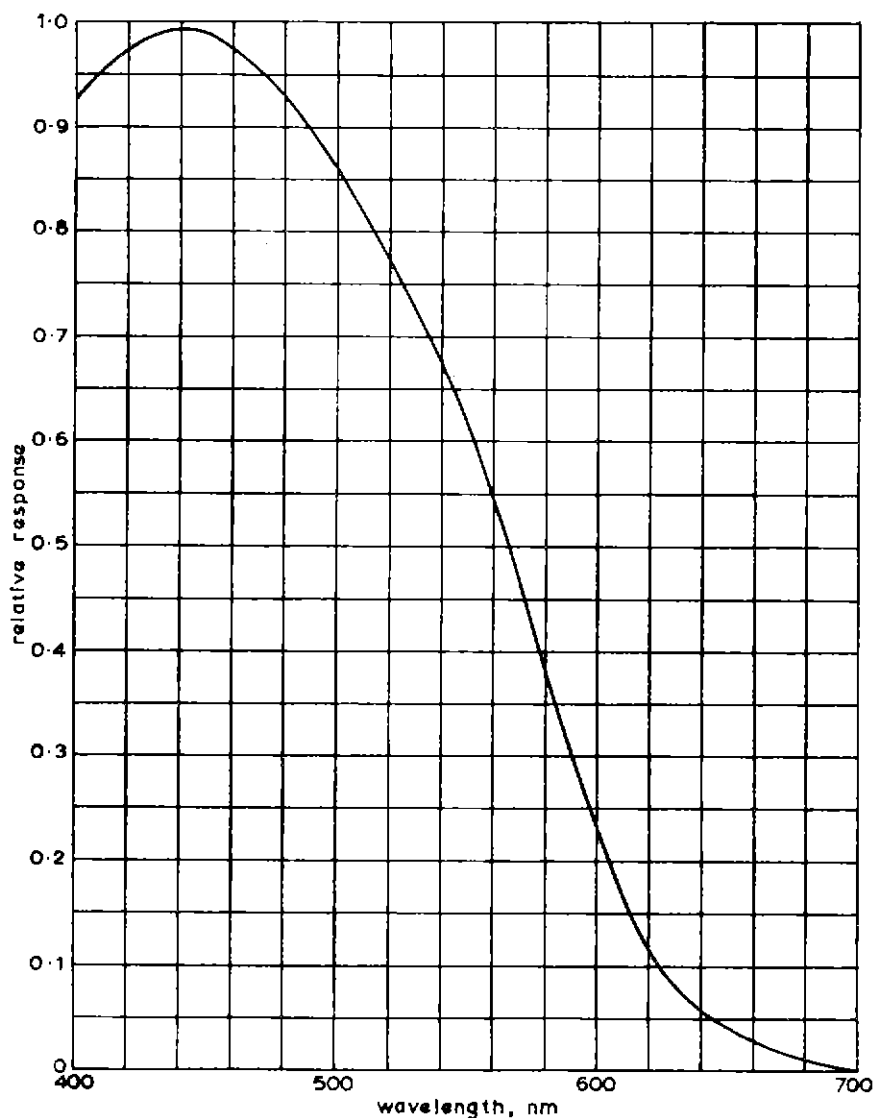


Fig. 3 — Measured response characteristic of photomultiplier tube as a function of wavelength

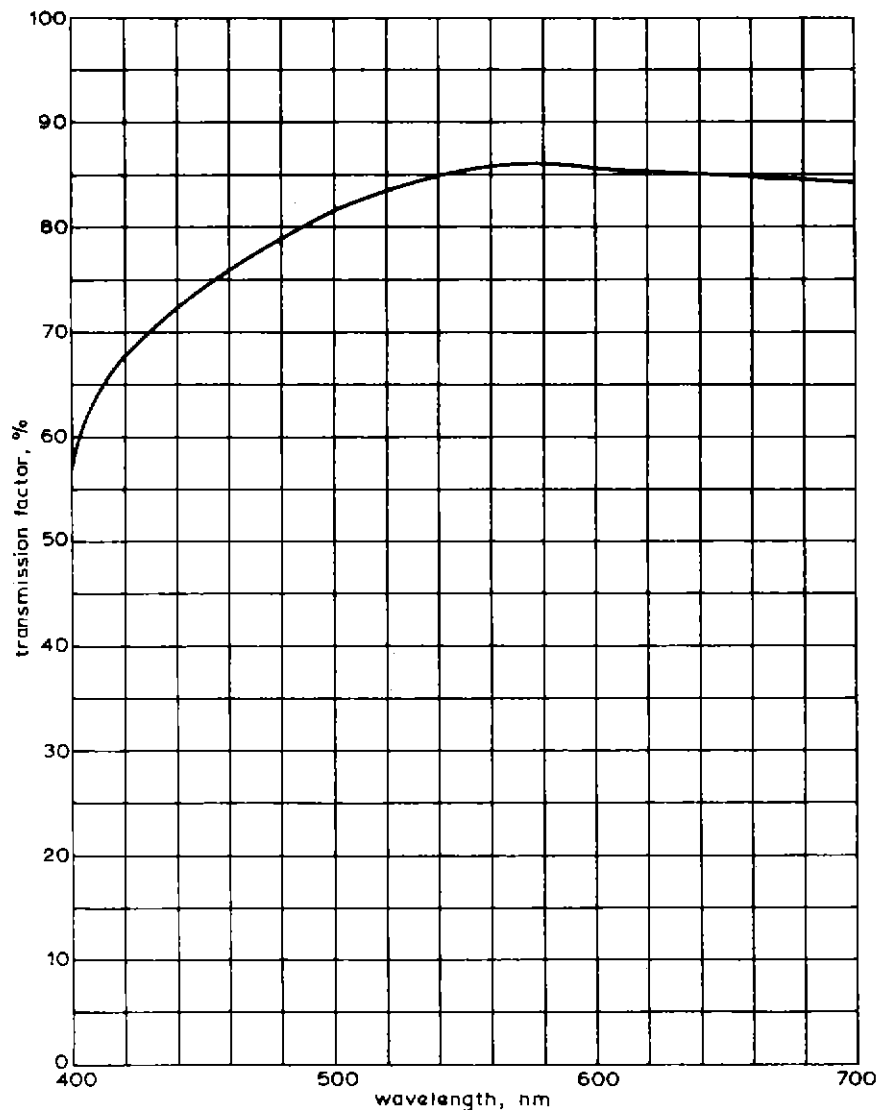


Fig. 4 — Transmission characteristic of lens as a function of wavelength

standard. In an instrument of this type, the spectral response of optical components in the path between object and photocell must be taken into account (Figs 3, 4, and 5). Even neutral filters used for balancing the relative amplitudes of the different stimuli must be used with care, as in fact they are only approximately neutral over the visible range, as shown by Figs 6 and 7. Gelatine 'neutral' filters are so unsatisfactory in the extreme blue region that they cannot be used for adjusting the light input to the \bar{z} path. In practice the light inputs to the \bar{x} and \bar{y} paths are adjusted with reference to that of the \bar{z} path, which contains no neutral filter.

Briefly, the essential requirements are as follows:³

- (a) Accurate linearity of response (output versus incident light flux).
- (b) Zero fatigue and temperature coefficient of the photocell.

- (c) The combined spectral responses of the colour filters, photocell, and optical components shall be C.I.E. \bar{x} , \bar{y} and \bar{z} functions (or linear transformations thereof).
- (d) The instrument shall have adequate sensitivity for direct measurements of a colour-television picture (i.e. where the peak luminance is approximately 50 cd/m² (15 ft-L) and the luminance of saturated colours is much lower).

2. Description

The instrument is illustrated in Fig. 8 and consists of an objective lens L_1 of 75 mm (3 in.) focal length, which images the object to be measured on a ground-glass screen G , the light rays passing through the semi-reflecting mirror M . The image can then be observed by means of

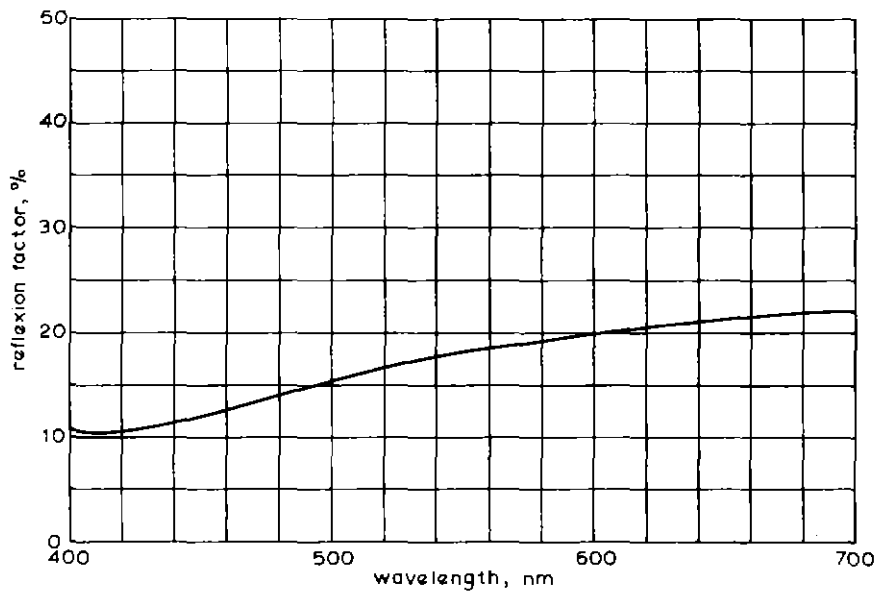


Fig. 5 — Reflexion factor of semi-transparent mirror as a function of wavelength

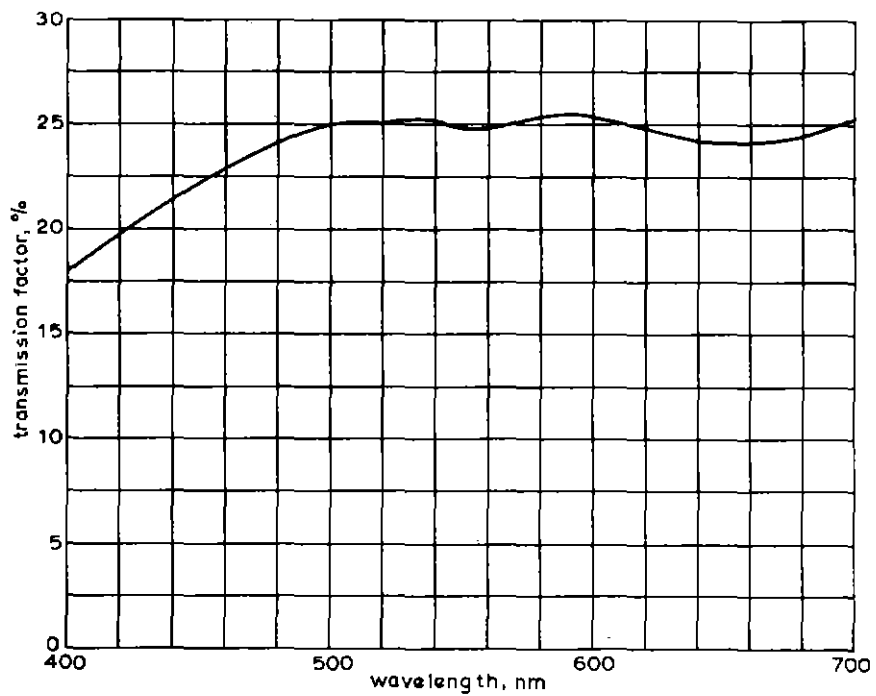


Fig. 6 — Transmission characteristic of typical gelatine neutral density filter ($ND=0.6$) as a function of wavelength

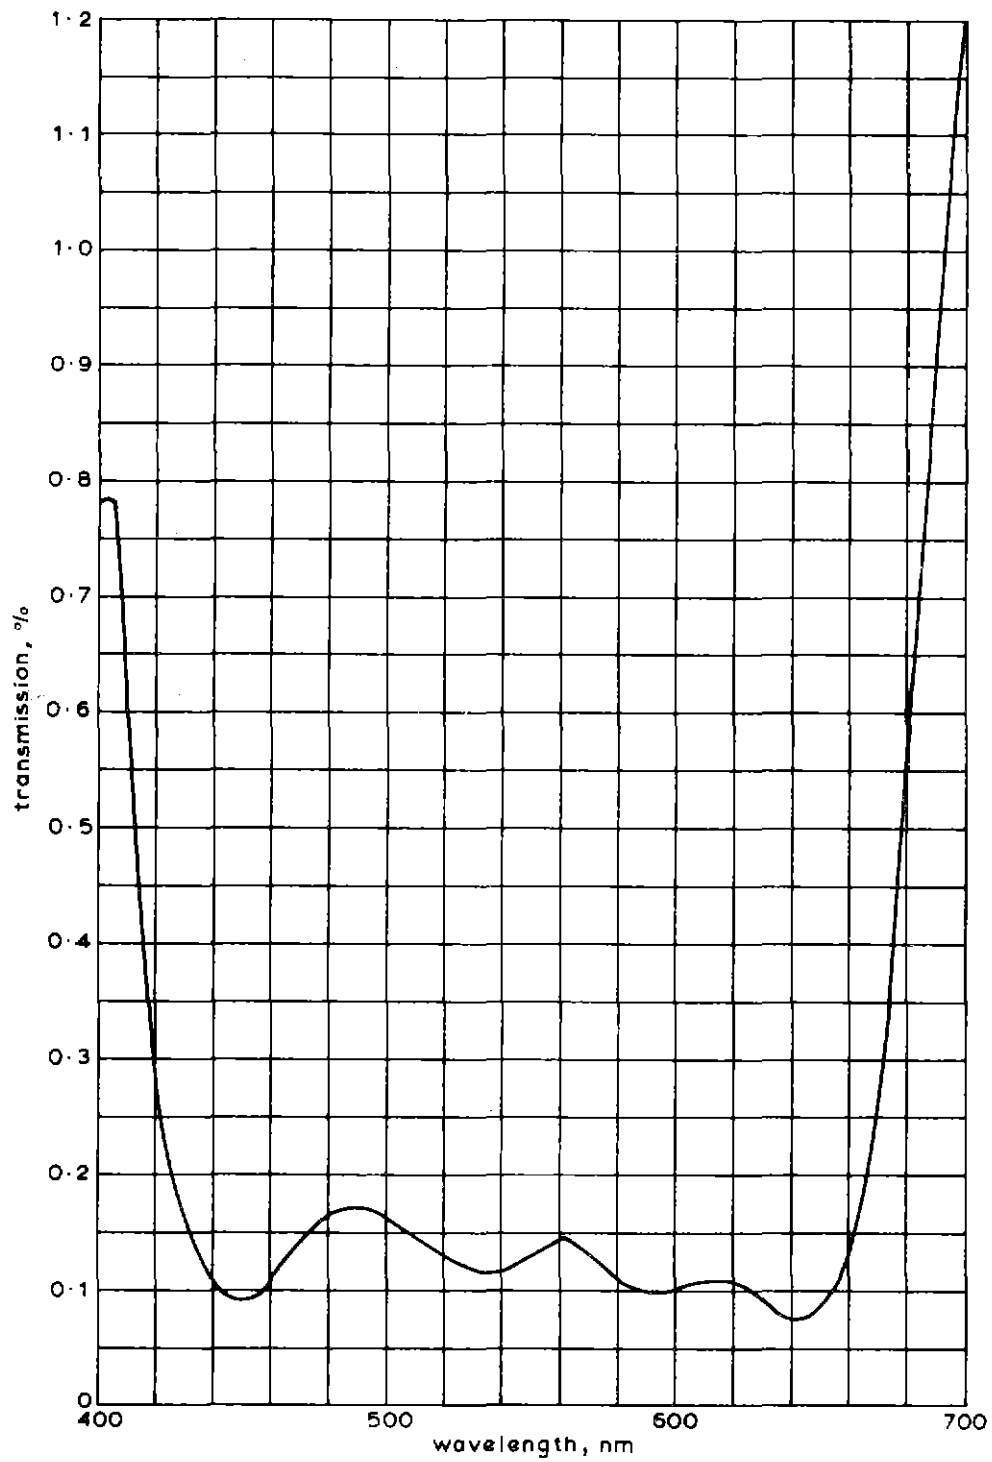


Fig. 7 — Transmission characteristic of typical glass neutral density filter ($ND = 3.0$) as a function of wavelength

the ocular L_2 . In the centre of the ground glass a black spot T indicates that part of the object which is being measured. The size of the spot, defining the area being measured, corresponds to a viewing angle of approximately 2° or an area of approximately $25 \text{ mm} \times 25 \text{ mm}$ (1 in. \times 1 in.) at a distance of 0.6 m (2 ft). A Fresnel screen is fitted on top of the ground glass to improve the brightness distribution of the image. A shutter S_1 is provided in front of the ocular to prevent light entering the instrument through the ocular when it is not in use.

For measurement, the semi-reflecting mirror M, set at 45° between the lens and the ground-glass screen, deflects a fixed proportion of the light flux into an aperture A situated at a distance equal to the lens-to-screen distance. The aperture corresponds in size to the black disc on the ground

glass, thus ensuring that the correct area of the object is being measured.

A filter wheel F_1 , containing six filters, is located under the aperture plate and is followed by a shutter S_2 , a fixed filter holder F_2 , and a diffusing glass D. Lastly there are the multiplier photocell and its associated voltage divider and output potentiometer.

Adjustment of the amount of light reaching the photomultiplier tube is most effectively carried out by means of the lens iris shown in Figs 8 and 9. As already indicated, neutral-filter materials are not truly neutral over the visual range and their use would introduce errors.

Normally in laboratory work a stabilized mains e.h.t. supply is used to power the photomultiplier and the output current is read on a sensitive galvanometer. For other

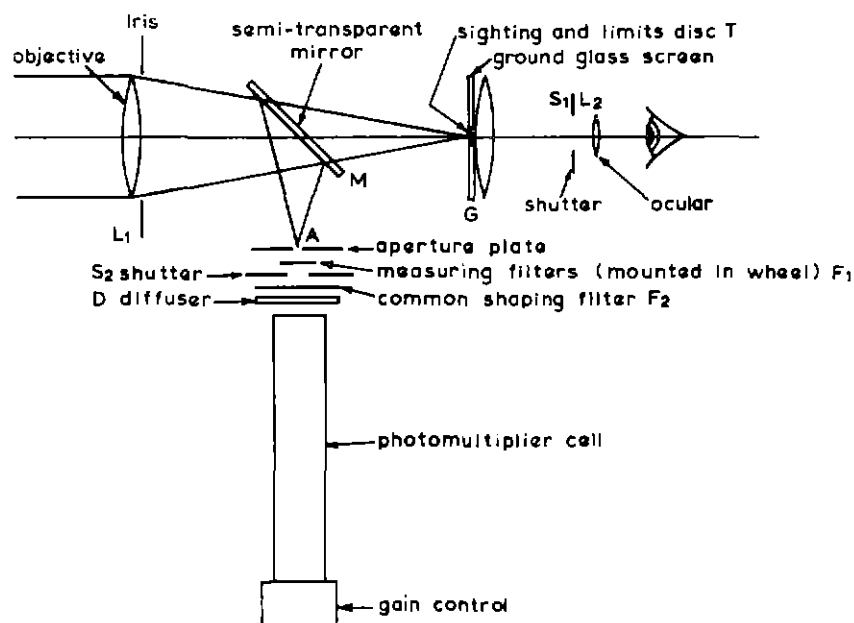


Fig. 8 — Approximate layout of elements in the photoelectric tristimulus colorimeter

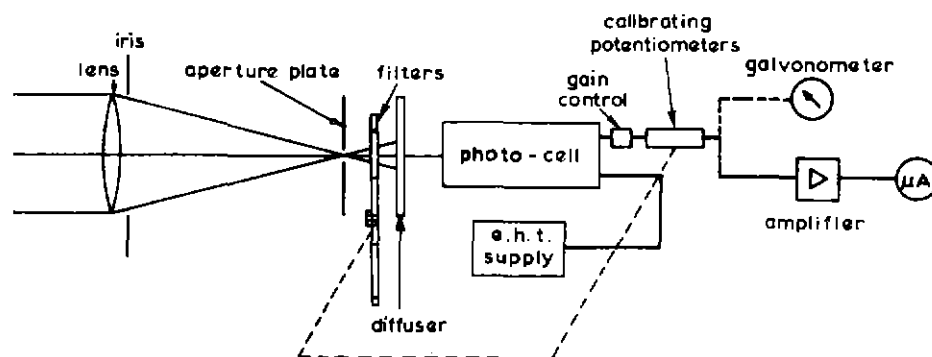


Fig. 9 — Schematic of the photoelectric tristimulus colorimeter

applications where portability is essential, a d.c. to d.c. converter, fed from four 1.3V Mallory mercury cells, is used to provide the 1 kV required by the photomultiplier tube. The output of the photomultiplier is applied to a simple transistor d.c. amplifier and measured by a large scale microammeter; galvanometers are usually bulky and insufficiently rugged to withstand transport. Fig. 10 shows a photograph of the instrument and Fig. 11 shows the e.h.t. and meter units in the carrying-case with the colorimeter.

3. Analysing Filters

As stated previously, the choice of analysing filters is restricted by the availability of standard filter materials. Therefore filters were selected for the best fit, taking into account the spectral characteristic of the lens, semi-transparent mirror, and photocell. The results achieved are shown in Figs 12, 13, and 14. As can be seen, the \bar{x} and \bar{y} responses are too high at the longer wavelengths (red); this is accounted for by the response of the photocell (Fig. 3) and the fact that no filters are commercially available to correct this characteristic. The realized curves shown are for one specific photomultiplier tube and may vary slightly if the tube is changed.

It is possible, however, to overcome this difficulty by the addition of two extra filters to the filter wheel, these being adjusted in response and density, so that readings taken using them, when subtracted from the X and Y readings respectively, permit correct stimuli values to be ob-

tained. These adjustments are made when calibrating the instrument or when changing photocells; variations in the responses of cells of a given type usually occur at the longer wavelengths.

The filter wheel consists therefore of six filters, labelled X_R (for the red pass-band of X), X_B (for the blue pass-band of X), Y, Z, $-X'$, and $-Y'$; the latter filters are used to correct the readings of X and Y as described. As neutral filters cannot easily be selected to the required accuracy, separate potentiometers are inserted into the output circuit of the photomultiplier for each position of the filter wheel; the potentiometers enable adjustments to be made over a range of ± 5 per cent.

4. Calibration

The instrument can be calibrated or checked by means of a standard tungsten lamp of known colour temperature and a series of narrow-band colour filters, these having been previously measured using a spectrophotometer and their C.I.E. tristimulus values computed for the illumination used. By means of these filters, the correct values of X_R and X_B can also be ascertained. A similar procedure can be used for $-X'$ and $-Y'$ but in this case it is important that magenta calibrating filters be used as the required characteristic is given by filters of this non-spectral hue with two response peaks lying beyond the upper and lower extremities of the visible spectrum. Greater calibration accuracy can be obtained if a monochromator is used.



Fig. 10 — Photograph of photoelectric tristimulus colorimeter head

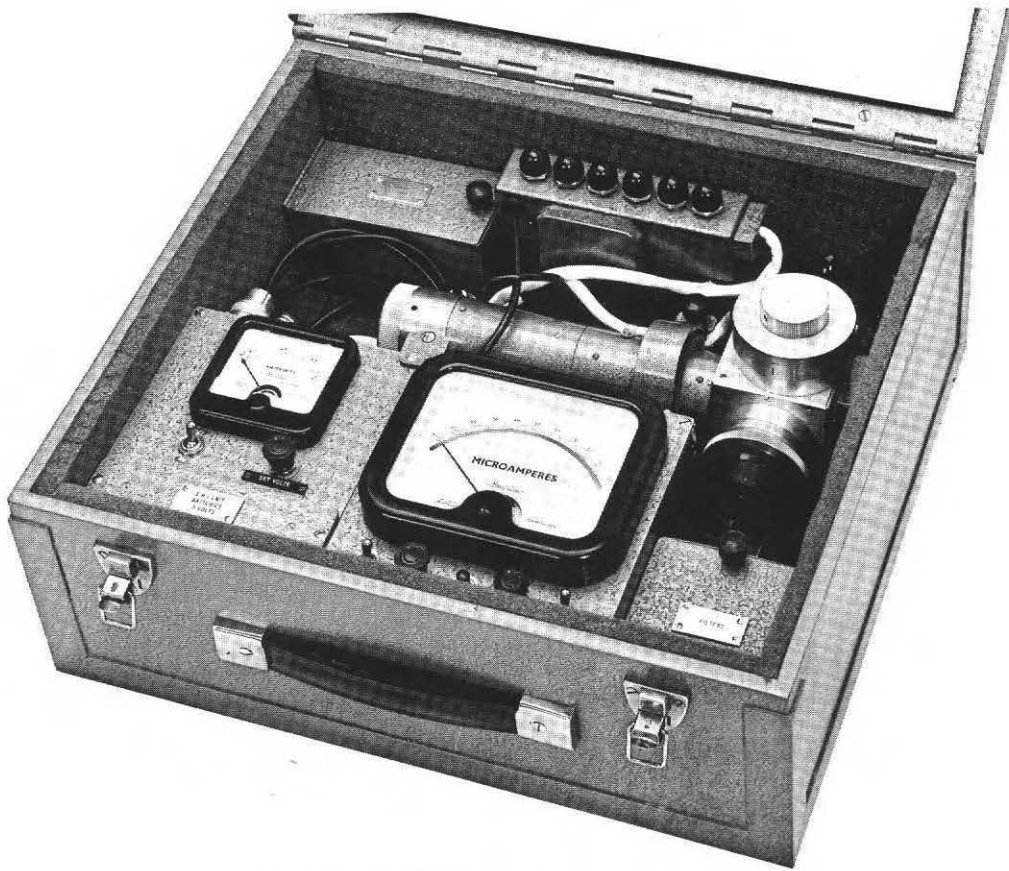


Fig. 11 — Complete instrument in carrying case

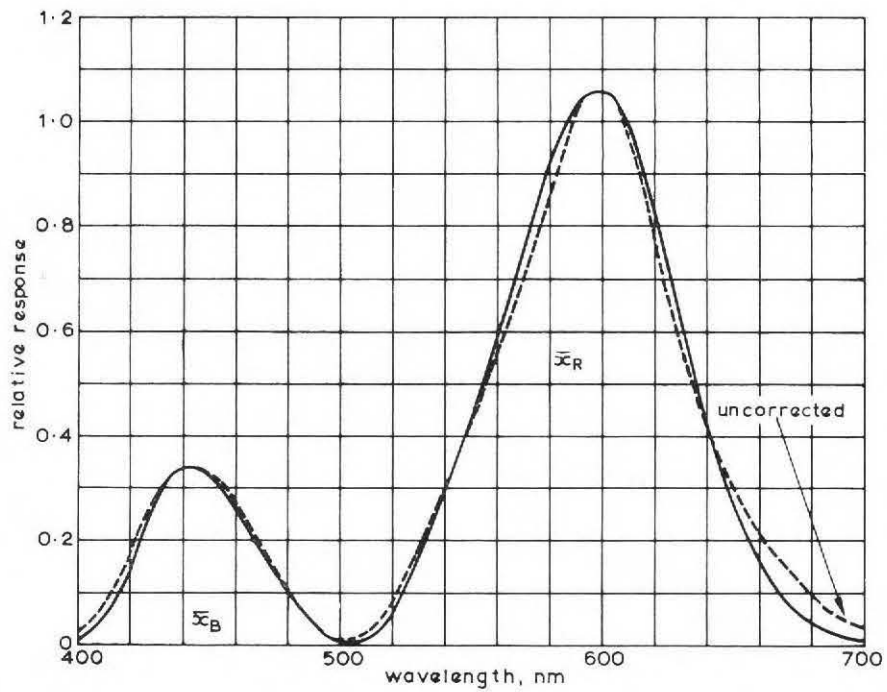


Fig. 12 — \bar{x} curve and response achieved in the instrument as a function of wavelength
 ——— C.I.E. - - - - - Instrument

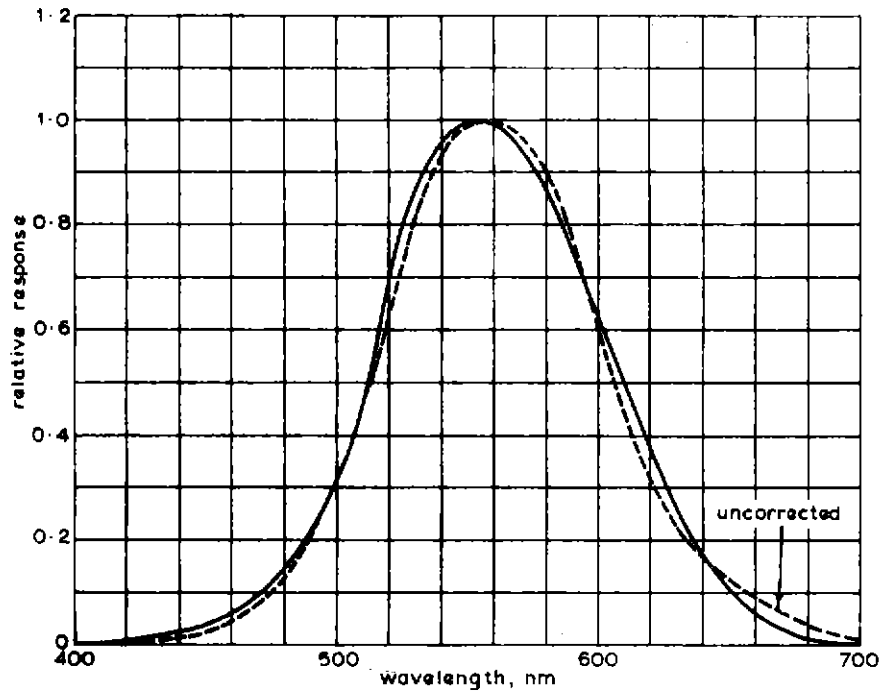


Fig. 13 — \bar{y} curve and response achieved in the instrument as a function of wavelength
 ————— C.I.E. - - - - - Instrument

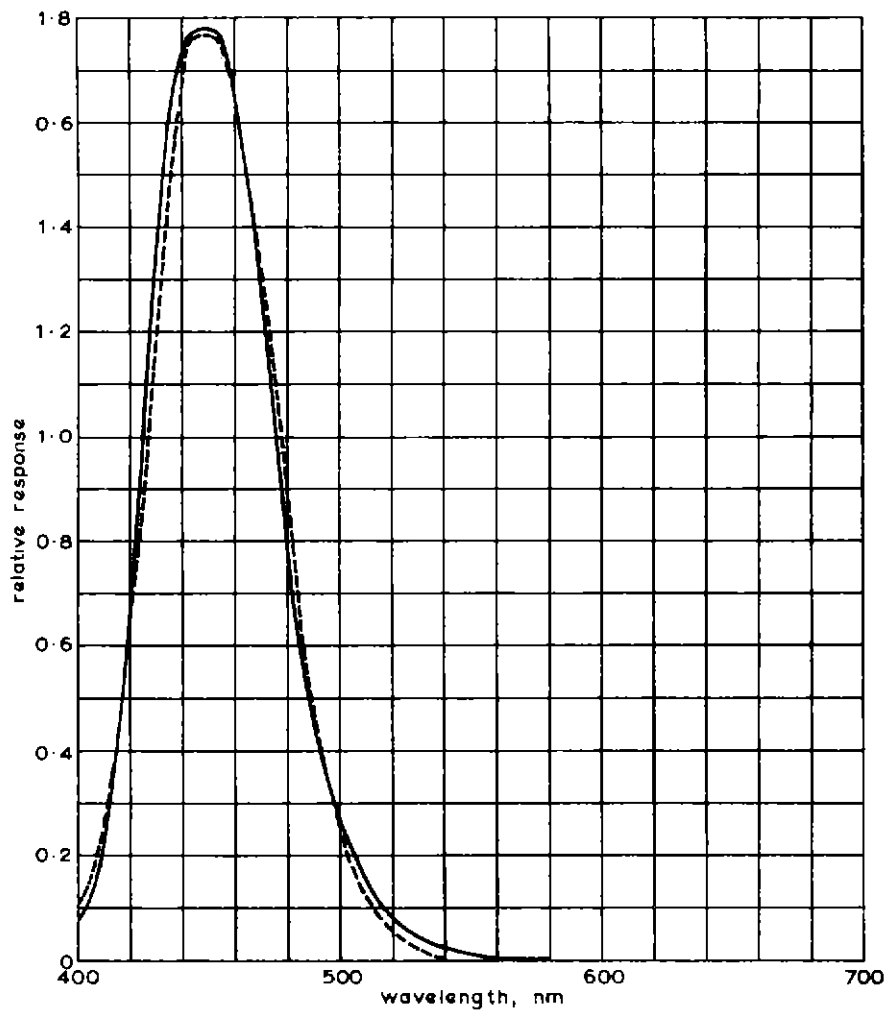


Fig. 14 — \bar{z} curve and response achieved in the instrument as a function of wavelength
 ————— C.I.E. - - - - - Instrument

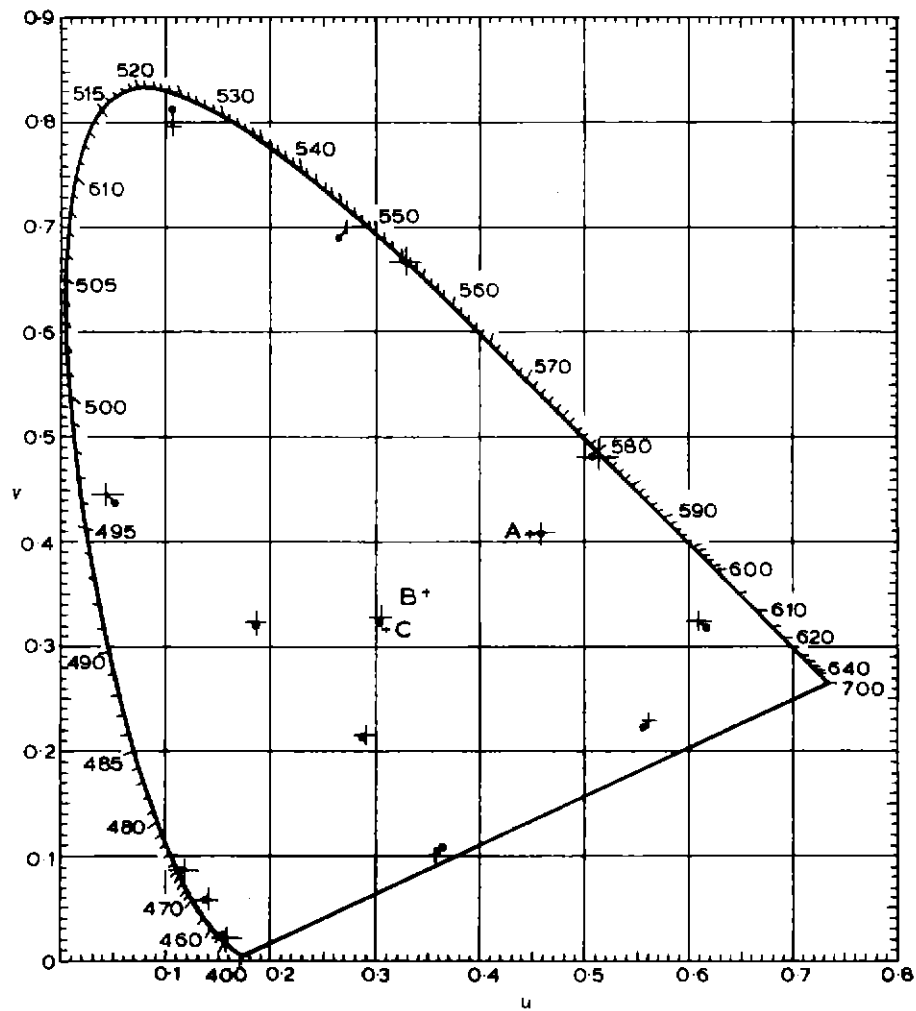


Fig. 15 — Accuracy of the photoelectric tristimulus colorimeter plotted on the 1931 C.I.E. chart
 + Computed ● Measured

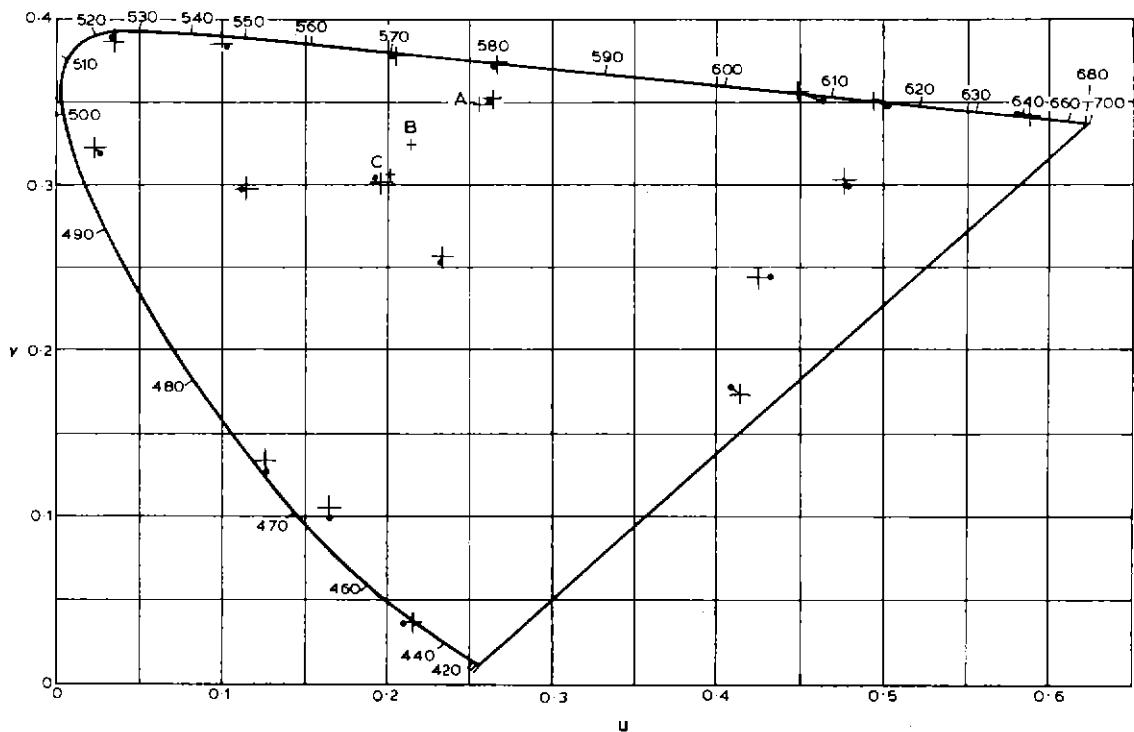


Fig. 16 — Accuracy of the photoelectric tristimulus colorimeter plotted on the 1960 C.I.E. 'uniform chromaticity scale' diagram
 + Computed ● Measured

5. Performance

Figs. 15 and 16 show computed and measured values of a series of filters covering a large portion of the C.I.E. colour locus. It can be seen that, as shown on the C.I.E.-U.C.S. diagram of Fig. 16, the greatest error occurs in the red region; nevertheless, most errors are within two just-noticeable differences* (jnds).

6. Conclusions

The accuracy of the portable instrument described is extremely good for measurements of small colour shifts and gives sufficient accuracy for most measurements of absorption

* 1 jnd is taken as 0.004 units in this paper.

lute chromaticity within the colour locus. Nevertheless, improvements may be possible as colour-filter materials and photomultiplier tubes of more suitable spectral response become available.

7. References

1. Chatten, J. B., **Wide range chromaticity measurements with photoelectric colorimeter**, Proc. Inst. Radio Engrs., 42, No. 1, pp. 156-60, 1954.
2. Judd, D. B., and Wyszecki, G., **Color in business, science and industry**, New York, John Wiley and Sons Inc., 2nd ed., 1963, pp. 194-201.
3. Wright, W. D., **The measurement of colour**, London, Hilger and Watts Ltd, 3rd ed., 1964.

APPENDIX

Tristimulus Colorimeter Filters

X_R W81EF, S35, W12, and W12
 X_B W81EF and W98
Y W81EF, S49, S49, W81EF, and WCC10M
Z W81EF, S10, and S20
-X W81EF, W29, and W34
-Y W81EF, W29, and W34

Neutral

Adjusted on test

W = Wratten
S = Strand Electric

CORRECTIONS TO MONOGRAPH NO. 63 (THE DESIGN OF TRANSMISSION LINES AND SINGLE-STAGE SWITCHING CIRCUITS FOR A LINE-STORE STANDARDS CONVERTER).

The following errors have been noted in the above monograph, and copies should be amended as indicated:

Page 8. Right-hand column

In expression (iii), $100F_0$ should read $100C_0$.

Page 12. Fig. 7(a)

In right-hand side of diagram '“write” shift pulse out' should read '“read” shift pulse out'.

Delay inductors in the '“write” shift pulse out' and '“read” shift pulse out' leads should be marked L_d .

Page 17. Left-hand column. Clause 7.2.3.1. 2nd paragraph. 5th line.

'A current i_3 is induced into the input line' should read

'A current i_3 is induced into the output line.'

© The British Broadcasting Corporation 1966