

Mullard

Valve and Service Guide

INDEX

December, 1946

| Valve Type | Base No. | Valve Type | Base No. | Valve Type | Base No. | Valve Type | Base No. | Valve Type | Base No. | Valve Type | Base No. |
|-----------------|----------|----------------------|----------|-------------------------|----------|--------------------|----------|-----------------------|----------|----------------------|----------|
| E SERIES | | | | | | | | | | | |
| EB34 | 64 | EL37 | 68 | PM12M | 4 | SP4B | 17 | TH21C | 22 | 3Q5G | 50 |
| EBC3 | 33 | EL50 | 35 | PM22A(5) | 6 | TDD4 | 23 | TH30C | 22 | 5U4G | 56 |
| EBC33 | 63 | EM1 | 27 | PM20 | 6 | TH4B | 22 | VP13A | 31 | 5V4G | 56 |
| EBL1 | 36 | EM4 | 28 | PM202 | 1 | TSP4 | 17 | VP13C | 17 | 5Y3G | 56 |
| EBL31 | 69 | EM34 | 59 | QP22B | 13 | VP4 (5 and 7 Pin) | 12/16 | 2D13C | 7 | 5Z4G | 57 |
| EC31 | 65 | EM35 | 60 | SP2 | 15 | VP4A | 12/16 | RECTIFIERS | | | |
| EC52 | 75 | BATTERY TYPES | | TDD2A | 11 | VP4B | 17 | AZ1 | 38 | 6A8G | 58 |
| ECC3 | 77 | 1.4 VOLT | | TH2 | 21 | 2D4A | 7 | AZ31 | 56 | 6F6G | 68 |
| ECC31 | 66 | DAC32 | 47 | VP2 | 15 | 164V | 8 | AZ50 | 38 | 6U5/6G5 | 40 |
| ECC32 | 72 | DF33 | 48 | VP2B | 18 | 354V | 8 | CY1 | 39 | 6H6G | 64 |
| ECH3 | 29 | DF51 | 45 | A/C MAINS 4 VOLT | | 904V | 8 | CY31 | 70 | 6K7G | 62 |
| ECH35 | 61 | DK32 | 49 | ACO42 | 1 | AC/DC MAINS | | DW2 | 2 | 6K8G | 73 |
| EP6 | 31 | DL33 | 50 | ACO44 | 1 | CBL1 | 36 | DW4/350 | 2 | 6L6G | 68 |
| EP9 | 31 | DL35 | 51 | DO24 | 1 | CBL31 | 69 | FW4/500 | 2 | 6Q7G | 63 |
| EP36 | 62 | 2 VOLT | | DO26 | 1 | CCH35 | 61 | FW4/800 | 2 | 6R7G | 63 |
| EP37 | 62 | DA3 | 46 | DO30 | 1 | CL4 | 37 | HVR2 | 5 | 25A6G | 68 |
| EP39 | 62 | FC2 | 19 | FC4 | 20 | CL33 | 68 | HVR2A | 5 | UX BASE | |
| EP50 | 74 | FC2A | 19 | PEN A4 | 14 | FC13 | 30 | IW4/350 | 3 | 18 | 44 |
| EP54 | 76 | KBC32 | 52 | PEN B4 | 14 | FC13C | 20 | IW4/500 | 3 | 42 | 44 |
| EK2 | 30 | KF35 | 53 | PEN 42B | 14 | HL13 | 32 | UR1C | 9 | 43 | 44 |
| EK32 | 71 | KL32 | 54 | PEN 4VA | 14 | HL13C | 24 | UR3C | 26 | 75 | 43 |
| EL2 | 37 | KL35 | 51 | PEN 4V (5 and 7 Pin) | 10/14 | PEN 36C | 14 | AMERICAN TYPES | | 78 | 42 |
| EL3 | 34 | KLL32 | 55 | PEN 4DD | 25 | PEN 40DD | 25 | 1A7G | 49 | 80 | 41 |
| EL32 | 67 | PM2A | 1 | PM24A | 6 | SP13 | 31 | 1C5G | 51 | SPECIAL TYPES | |
| EL33 | 68 | PM2HL | 1 | PM24M | 6 | SP13C | 17 | 1H5G | 47 | 7475 | 78 |
| EL35 | 68 | | | SP4 (5 and 7 Pin) | 12/16 | TDD13C | 23 | 1N5G | 48 | | |

Top Cap



Metallising




Mullard VALVE BASES

(VIEWED FROM FREE END OF BASE)


Side Terminal




Screen




6-Pin UX




American Octal K Base




British 7-Pin M Base




British 9-Pin R Base




British 8-Side Contact P Base




9-Pin All-Glass




British 4-Pin A Base




British 5-Pin O Base

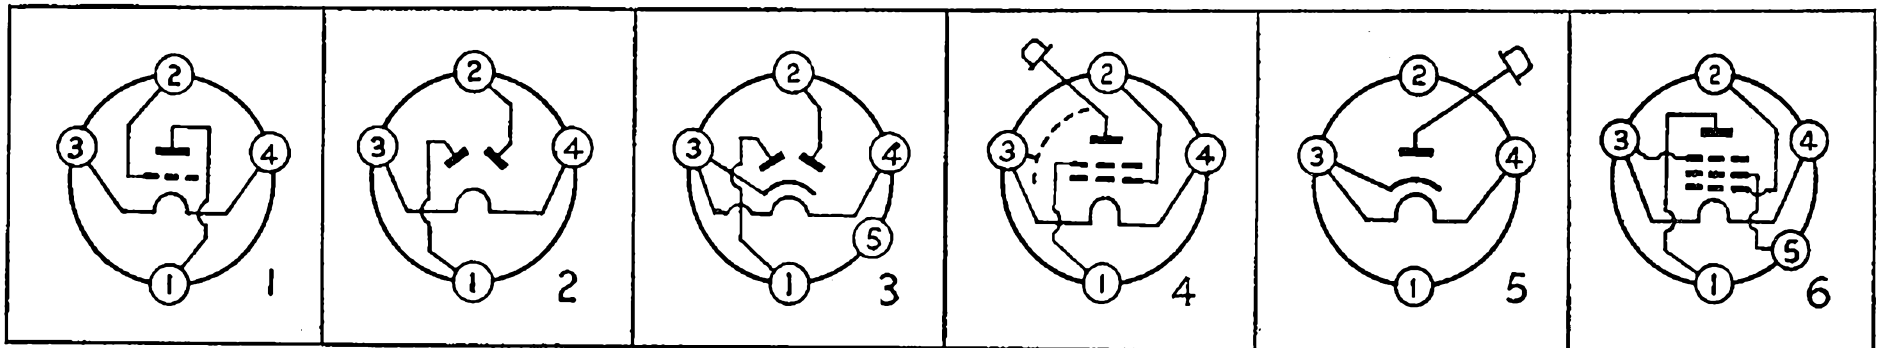


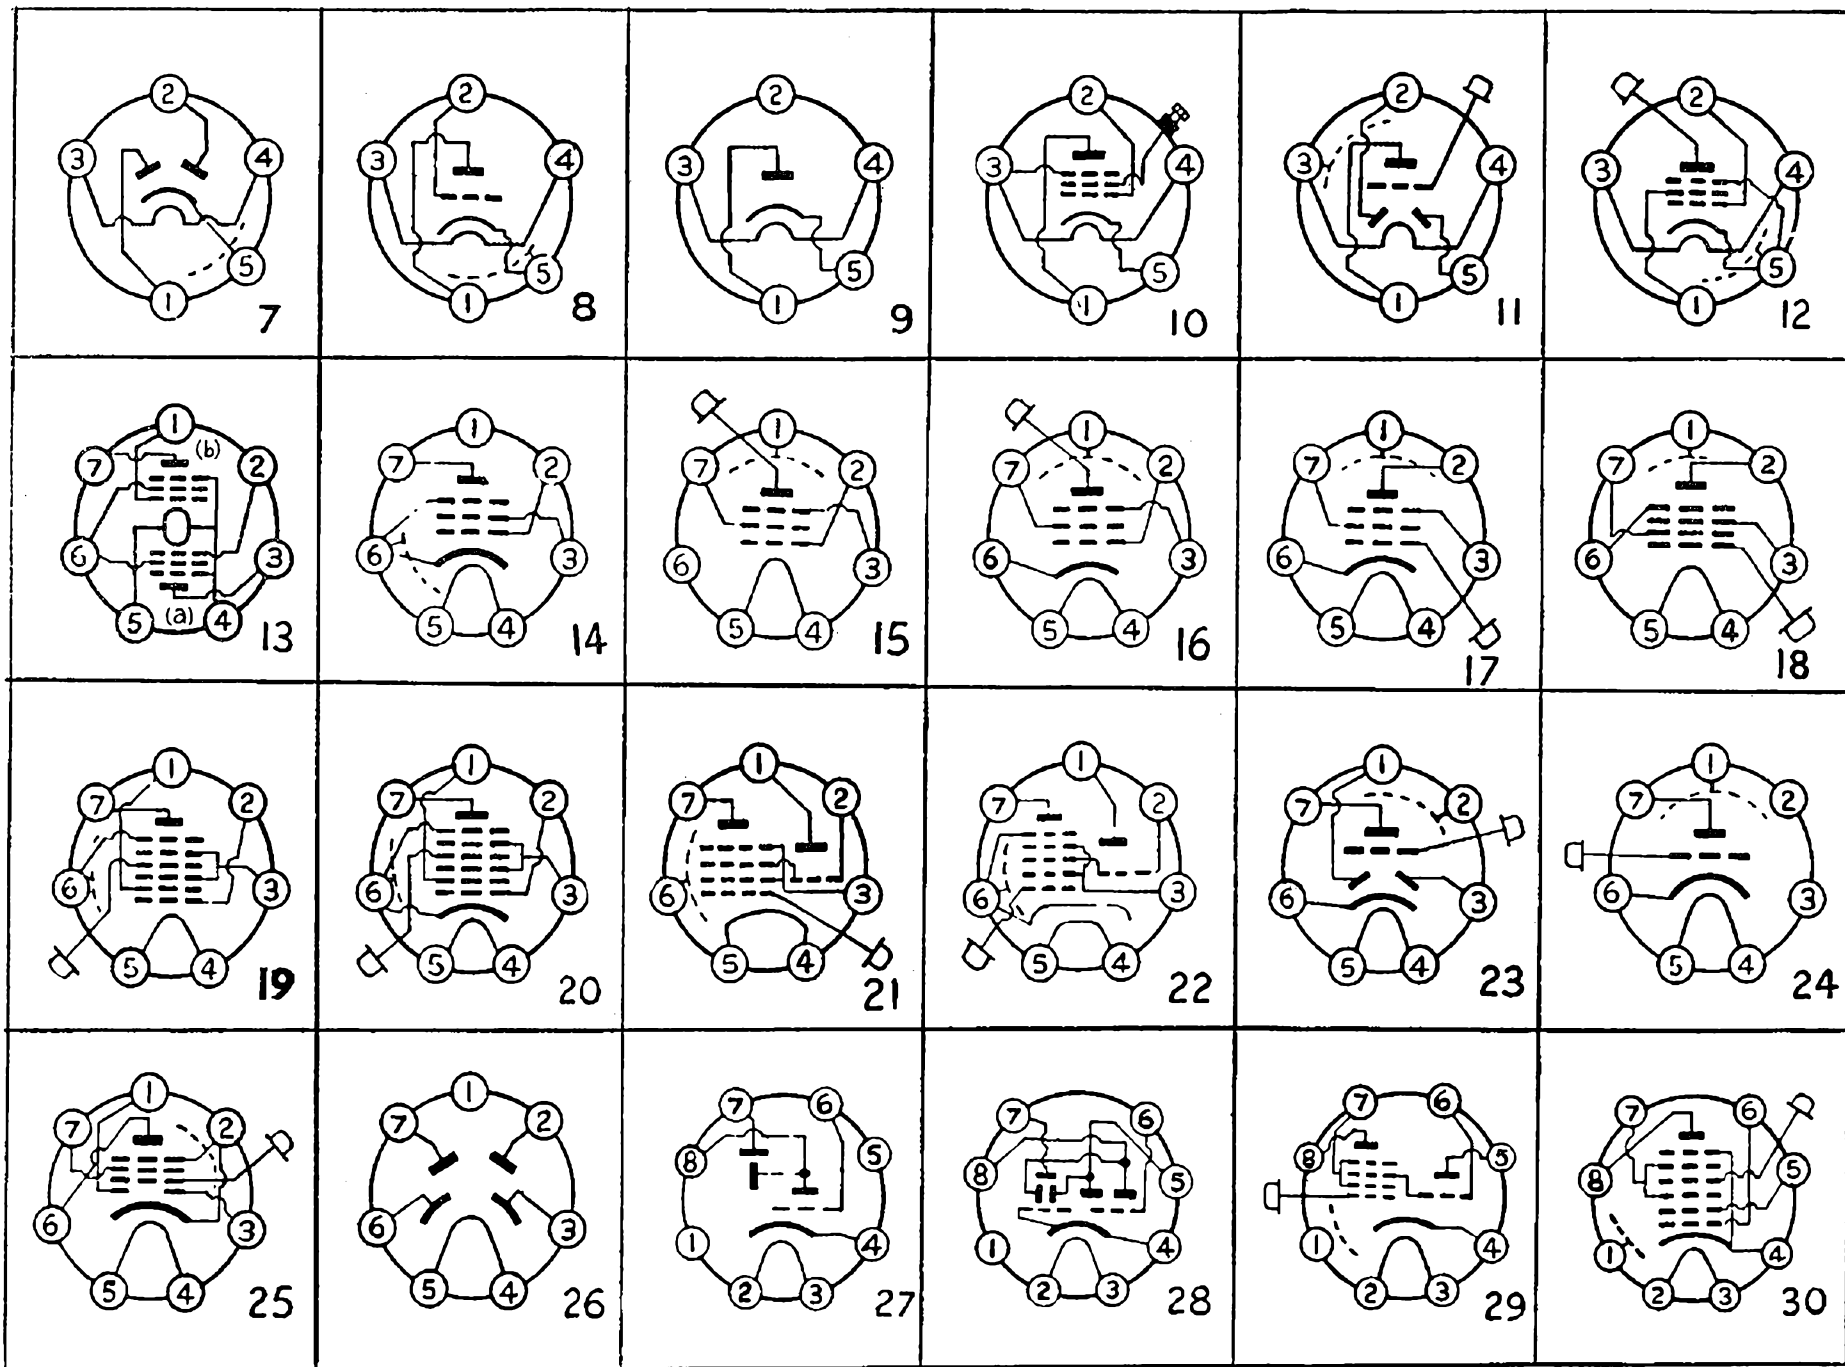

THE MULLARD WIRELESS SERVICE CO., LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2.

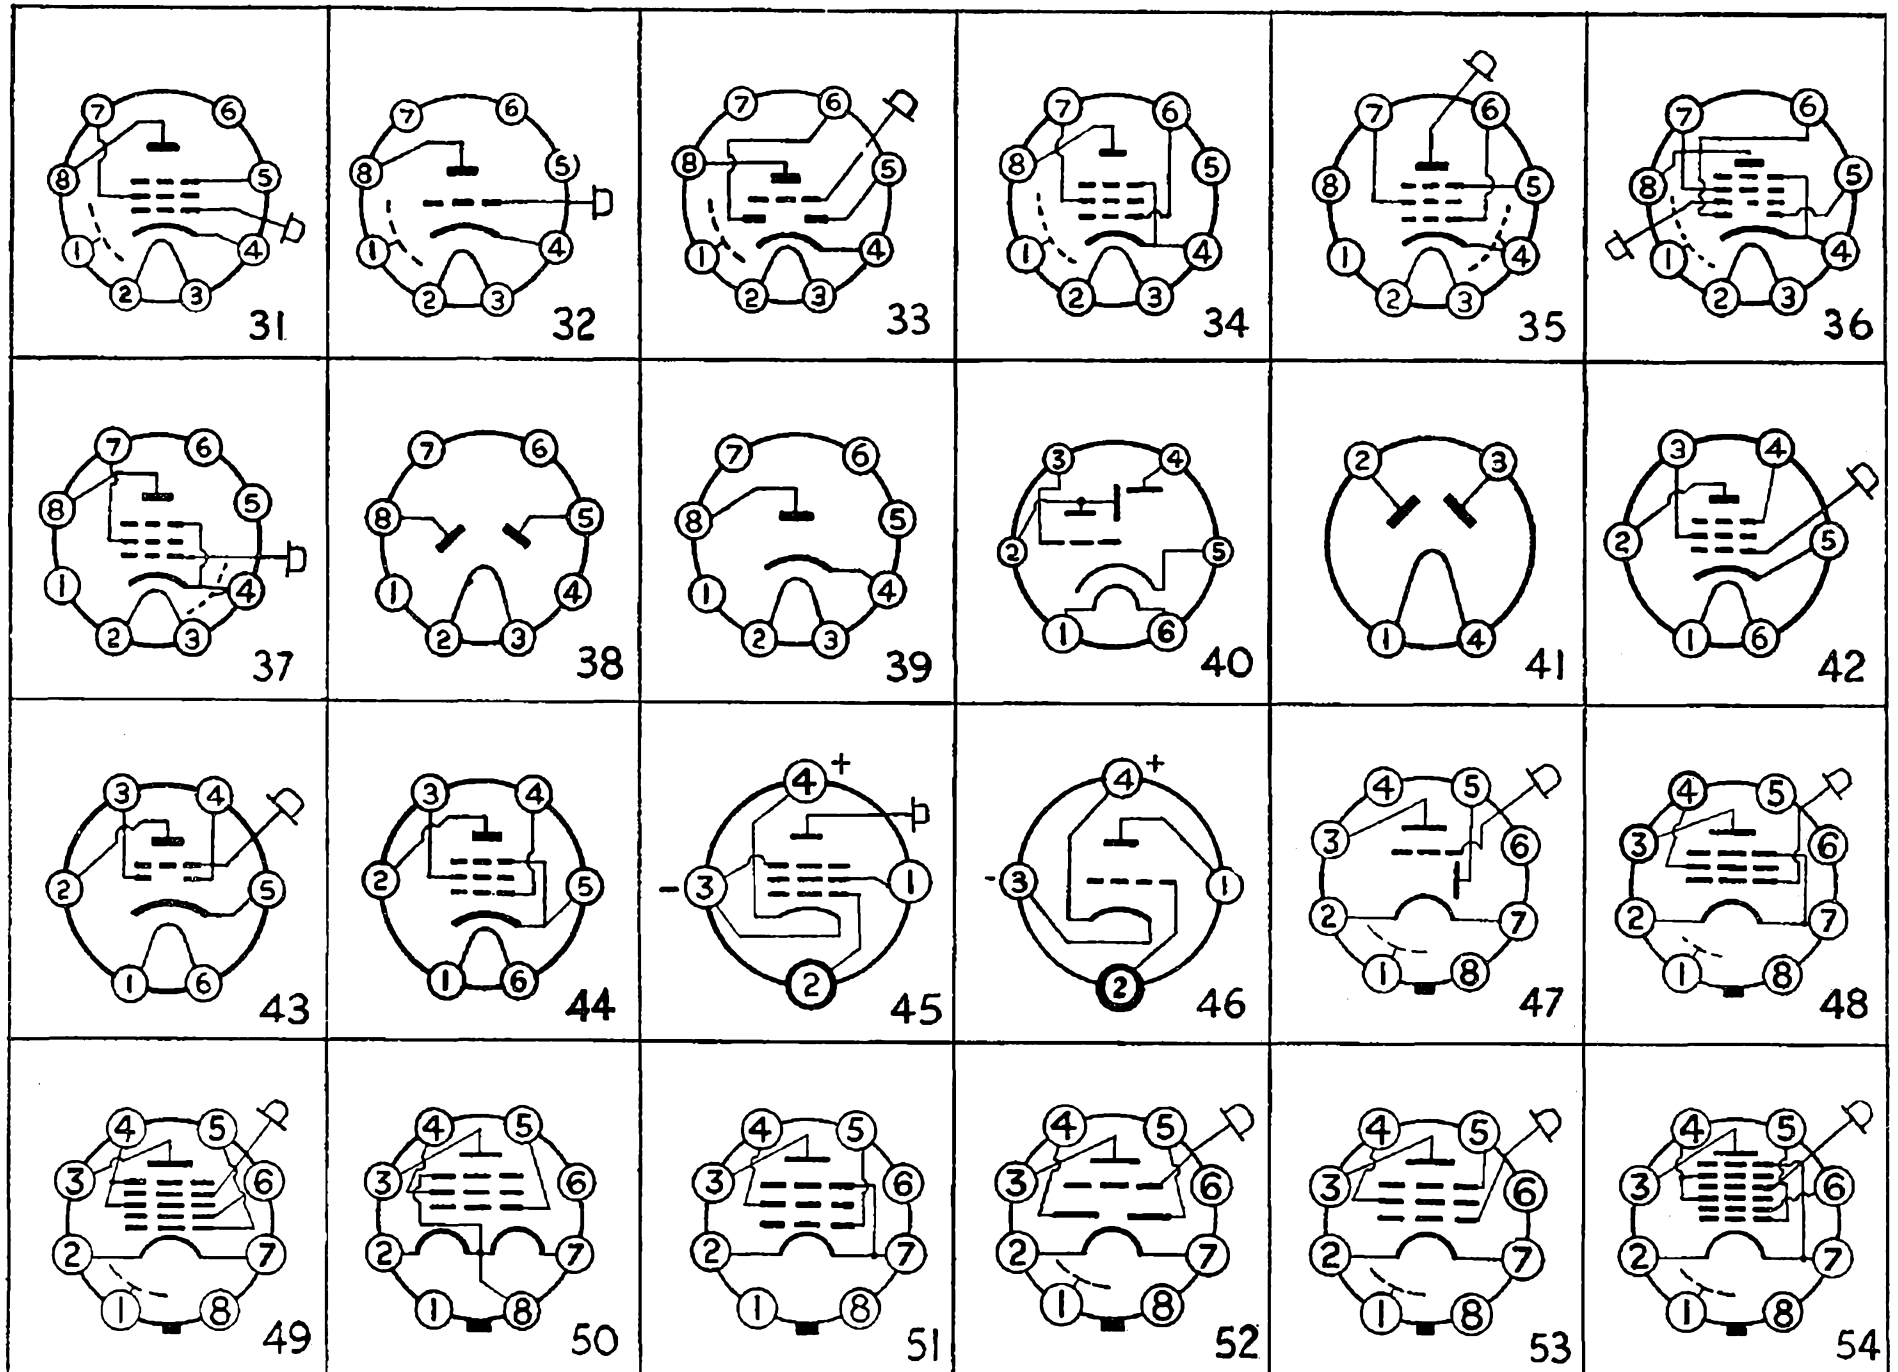

THE MULLARD WIRELESS SERVICE CO., LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2.

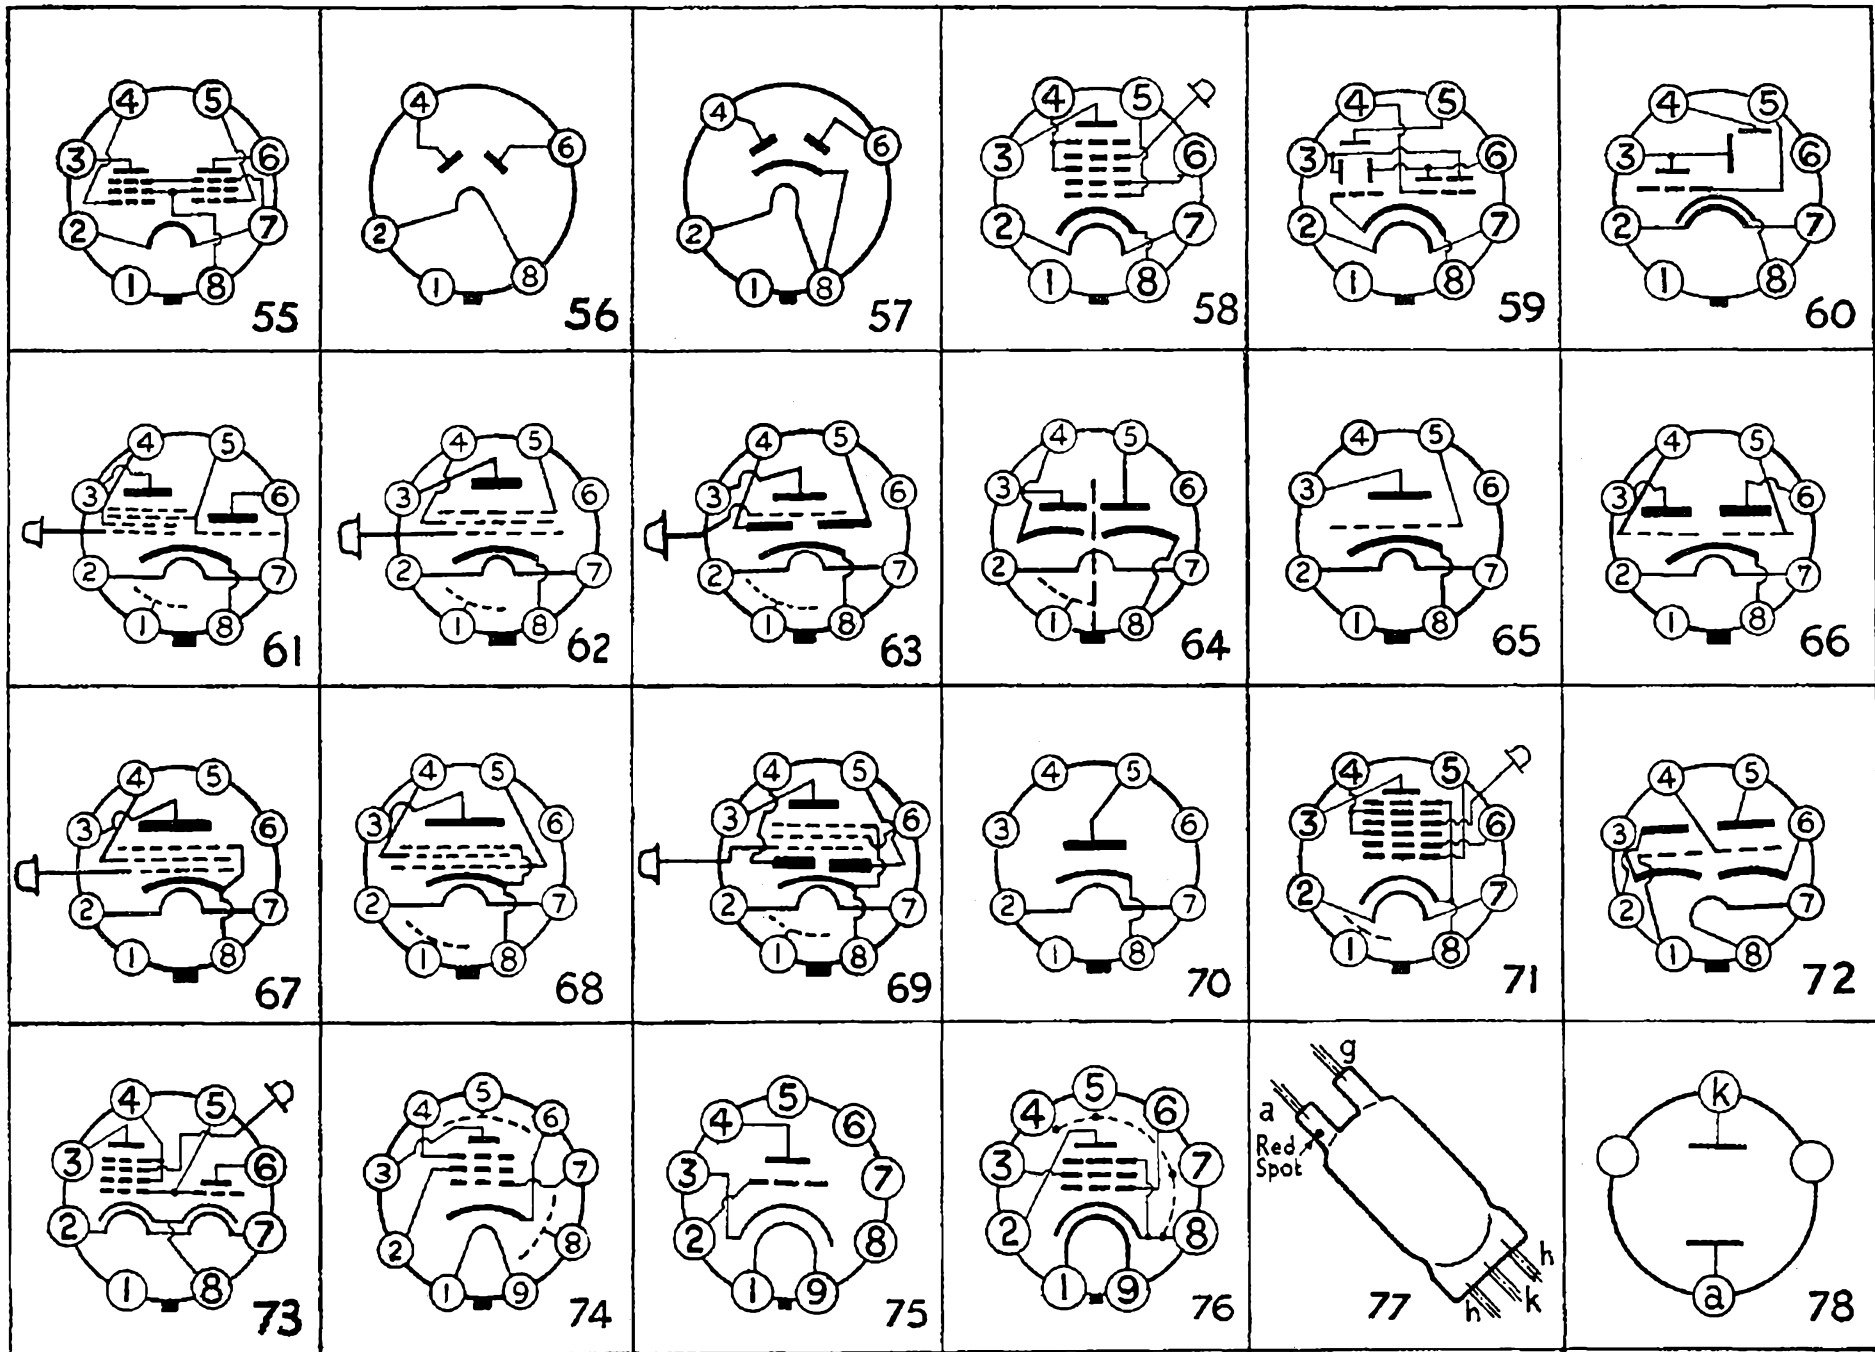

THE MULLARD WIRELESS SERVICE CO., LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2.

CHARACTERISTICS AND OPERATING DATA

V_f —Filament or Heater Voltage. (V) I_a —Anode Current. (mA) C —Clear Bulb.
 I_f —Filament or Heater Current. (A) r_a —Anode Impedance. (ohms) M —Metallised Bulb.
 V_a —Anode Voltage. (V) μ —Amplification Factor. P Base—Side Contact Base.
 V_{g2} —Auxiliary Grid or Screen Voltage. (V) g_m or g_c —Mutual or Conversion Conductance.(mA/V) Octal —8-Pin Base with Locating Key.
 V_g —Control Grid Voltage. (V) W out—Audio Output Power. (Watts)
 Prices shown are exclusive of Purchase Tax.

| " D " SERIES. $V_f = 1.4$ V. | | | | | | | | | | | | | | | | |
|------------------------------|--|------------------|--------------------------|-------|----------|--------|---------------------------------------|-----------|-------|----------------|---|-------------------|-------|-------|--|--|
| Type | Description | No. of Base Pins | Working Conditions | | | | Characteristics at Working Conditions | | | | | Optimum Load Ohms | Price | Type | | |
| | | | I_f | V_a | V_{g2} | $-V_g$ | I_a | r_a | μ | g_m or g_c | W out | | | | | |
| DK32 | Heptode Frequency Changer | Octal | 0.05 | 90 | 90* | 0 | 0.6 | 600,000 | — | 0.25 | — | — | 10/6 | DK32 | | |
| DF33 | H.F. Pentode | Octal | 0.05 | 90 | 90 | 0 | 1.2 | 1,500,000 | — | 0.75 | — | — | 9/- | DF33 | | |
| DAC32 | Single-diode Triode | Octal | 0.05 | 90 | — | 0 | 0.15 | 240,000 | 65 | 0.275 | — | — | 7/6 | DAC32 | | |
| DL33 | Output Pentode | Octal | 0.05‡ | 110 | 110 | 6.6 | 8.5 | 110,000 | — | 2.0 | 0.33 | 8,000 | } 9/- | DL33 | | |
| DL35 | Output Pentode | Octal | 0.1 | 110 | 110 | 6.6 | 10.0 | 100,000 | — | 2.2 | 0.4 | 8,000 | | DL35 | | |
| | | | 0.1 | 90 | 90 | 7.5 | 7.8 | 115,000 | — | 1.55 | 0.24 | 8,000 | 9/- | | | |
| * $V_{g3} + 5 = 45$ V. | | | ‡ Filament Arrangement : | | | | Series | Parallel | | | | | | | | |
| | | | | | | | Voltage 2.8 | 1.4 V. | | | | | | | | |
| | | | | | | | Current 0.05 | 0.1 A. | | | | | | | | |
| " K " SERIES. $V_f = 2.0$ V. | | | | | | | | | | | | | | | | |
| Type | Description | No. of Base Pins | Working Conditions | | | | Characteristics at Working Conditions | | | | | Optimum Load Ohms | Price | Type | | |
| | | | I_f | V_a | V_{g2} | $-V_g$ | I_a | r_a | μ | g_m or g_c | W out | | | | | |
| KK32 | Octode Frequency Changer | Octal | 0.13 | 135* | 45‡ | 0.5 | 0.7 | 2,500,000 | — | 0.27 | — | — | 10/6 | KK32 | | |
| KF35 | H.F. Pentode | Octal | 0.05 | 120 | 60 | 1.5 | 1.45 | 1,500,000 | 1,500 | 1.0 | — | — | 9/- | KF35 | | |
| KBC32 | Double Diode Triode | Octal | 0.05 | 120 | — | 1.5 | 1.8 | 21,000 | 25 | 1.2 | — | — | 7/6 | KBC32 | | |
| KL35 | Output Pentode | Octal | 0.15 | 135 | 135 | 4.5 | 5.6 | 150,000 | 33 | 2.2 | 0.34 | 19,000 | 9/- | KL35 | | |
| KLL32 | QPP Double Pentode | Octal | 0.3 | 120 | 120 | 10.3 | 3.3 | — | — | 2.6‡ | 1.0 | 15,500 | 12/6 | KLL32 | | |
| 2 VOLT RANGE | | | | | | | | | | | | | | | | |
| TH2 | Triode Hexode Frequency Changer | 7 | 0.23 | 135 | 60 | 5.0 | 0.95 | 600,000 | — | 0.43 | — | — | 10/6 | TH2 | | |
| FC2 | Octode Frequency Changer | 7 | 0.1 | 135* | 70‡ | 0 | 0.95 | — | — | 0.2 | — | — | 10/6 | FC2 | | |
| FC2A | Octode Frequency Changer | 7 | 0.13 | 135* | 45‡ | 0.5 | 0.7 | 2,500,000 | — | 0.27 | — | — | 10/6 | FC2A | | |
| VP2 | Vari-mu H.F. Pentode | 7 | 0.18 | 135 | 135 | 0-7 | 3.0 | 400,000 | — | 1.5 | — | — | 9/- | VP2 | | |
| VP2B | Vari-mu H.F. Pentode | 7 | 0.14 | 135 | 60 | 1.5 | 2.0 | 1,300,000 | — | 1.4 | — | — | 9/- | VP2B | | |
| SP2 | H. F. Pentode | 7 | 0.18 | 135 | 135 | 0 | 3.0 | 700,000 | 1,200 | 1.8 | — | — | 9/- | SP2 | | |
| PM12M | Vari-mu Screened Tetrode (M. or C.) | 4 | 0.18 | 150 | 90 | 0-7 | 2.5 | — | — | 1.4 | — | — | 9/- | PM12M | | |
| TDD2A | Double-diode Triode | 5 | 0.12 | 135 | — | 1.5 | 1.95 | 25,000 | 30 | 1.2 | — | — | 7/6 | TDD2A | | |
| PM2HL | Medium Independence Triode (M. or C.) | 4 | 0.1 | 135 | — | 1.5 | 2.2 | 21,500 | 30 | 1.4 | — | — | 4/9 | PM2HL | | |
| PM2A | Output Triode | 4 | 0.2 | 135 | — | 6.0 | 5.0 | 6,000 | 12 | 2.0 | 0.15 | 7,000 | 6/- | PM2A | | |
| PM202 | Super power Triode... .. | 4 | 0.2 | 150 | — | 12-15 | 14.0 | 2,000 | 7 | 3.5 | — | 3,700 | 11/6 | PM202 | | |
| PM22A | Output Pentode | 5 | 0.15 | 135 | 135 | 4.5 | 5.6 | 150,000 | — | 2.2 | 0.34 | 19,000 | 9/- | PM22A | | |
| PM22D | High Sensitivity Output Pentode | 5 | 0.3 | 135 | 135 | 2.4 | 5.0 | — | — | 3.0 | 0.3 | 24,000 | 9/- | PM22D | | |
| PM2B | Class B Double Triode | 7 | 0.2 | 120 | — | 0 | — | — | — | — | 1.25 | 14,000 | 10/6 | PM2B | | |
| QP22B | Q.P.P. Double Pentode | 7 | 0.3 | 135 | 135 | 11.7 | 3.8 | — | — | 2.6‡ | 1.33 | 14,700 | 12/6 | QP22B | | |
| * $V_a - V_{g2} = 135$. | | | ‡ $V_{g3} + 5 = 70$ V. | | | | † $V_{g3} + 5 = 45$ V. | | | | ¶ $V_a - V_{g2} = 100$ and $V_{g1} = 0$ | | | | | |

" E " SERIES. $V_f = 6.3 \text{ V.}$

| Type | Description | No. of Base Pins | Working Conditions | | | | | Characteristics at Working Conditions | | | | | Optimum Load Ohms | Price | Type |
|-------|-----------------------------------|------------------|--------------------|------------|------|------|---------|---------------------------------------|-------|----------|-------|--------|-------------------|-------|-------|
| | | | If | Va | Vg2 | -Vg | Ia | ra | μ | gm or gc | W out | | | | |
| EM1 | Tuning Indicator | P. Base | 0.2 | 250 | — | 0-5 | — | — | — | — | — | — | — | 9/- | EM1 |
| EM4 | Tuning Indicator | P. Base | 0.2 | 250 | — | 0-16 | — | — | — | — | — | — | — | 9/- | EM4 |
| EM34 | Tuning Indicator | Octal | 0.2 | 250 | — | 0-22 | — | — | — | — | — | — | — | 9/- | EM34 |
| EM35 | Tuning Indicator | Octal | 0.3 | 250 | — | 0-22 | — | — | — | — | — | — | — | 9/- | EM35 |
| ECH3 | Triode Hexode Frequency Changer | P. Base | 0.2 | 250 | 100 | 2.0 | 3.0 | 1,300,000 | — | 0.65 | — | — | — | 11/6 | ECH3 |
| ECH35 | Triode Hexode Frequency Changer | Octal | 0.3 | 250 | 100 | 2.0 | 3.0 | 1,300,000 | — | 0.65 | — | — | — | 11/6 | ECH35 |
| EK2 | Octode Frequency Changer | P. Base | 0.2 | 250 | 200* | 2.0 | 1.0 | 2,000,000 | — | 0.55 | — | — | — | 11/6 | EK2 |
| EK32 | Octode Frequency Changer | Octal | 0.2 | 250 | 200* | 2.0 | 1.0 | 2,000,000 | — | 0.55 | — | — | — | 11/6 | EK32 |
| EF6 | H.F. Pentode | P. Base | 0.2 | 250 | 100 | 2.0 | 3.0 | 2,500,000 | 4,500 | 1.8 | — | — | — | 11/6 | EF6 |
| EF 9 | H.F. Pentode | P. Base | 0.2 | 250 | 100 | 2.5 | 6.0 | 1,250,000 | — | 2.2 | — | — | — | 10/6 | EF 9 |
| EF39 | Sliding Screen H.F. Pentode | Octal | 0.2 | 250 | 250 | 49.0 | — | 10,000,000 | — | 0.0045 | — | — | — | 10/6 | EF39 |
| EF36 | H.F. Pentode | Octal | 0.2 | 250 | 100 | 2.0 | 3.0 | 2,500,000 | 4,500 | 1.8 | — | — | — | 11/6 | EF36 |
| EF37 | Low Microphony H.F. Pentode | Octal | 0.2 | 250 | 100 | 2.0 | 3.0 | 2,500,000 | 4,500 | 1.8 | — | — | — | 11/6 | EF37 |
| EC52 | Short-Wave Triode | 9-pin all-glass | 0.43 | 250 | — | 2.6 | 10 | 9,500 | 60 | 6.5 | — | — | — | 15/- | EC52 |
| EC53 | U.H.F. Triode | Special 3-pin | 0.25 | 200 | — | 3.3 | 7.5 | 11,500 | 33.5 | 2.9 | — | — | — | 25/- | EC53 |
| EF50 | Short-wave H.F. Pentode | Loctal 9-pin | 0.3 | 250 | 250 | 2.0 | 10.0 | 1,000,000 | — | 6.5 | — | — | — | 17/6 | EF50 |
| EF54 | Short-wave Pentode | 9-pin all-glass | 0.3 | 250 | 250 | 1.7 | 10.0 | 500,000 | — | 7.7 | — | — | — | 17/6 | EF54 |
| EC31 | Low Impedance Triode | Octal | 0.65 | 250 | — | 16.0 | 20.0 | 3,300 | 10.5 | 3.2 | 0.5 | 10,000 | — | 10/- | EC31 |
| EB34 | Double Diode (separate cathodes) | Octal | 0.2 | 200 (peak) | — | — | 0.8 | — | — | — | — | — | — | 5/6 | EB34 |
| EBC3 | Double-diode Triode | P. Base | 0.2 | 275 | — | 6.25 | 5.0 | 15,000 | 30 | 2.0 | — | — | — | 9/6 | EBC3 |
| EBC33 | Double-diode Triode | Octal | 0.2 | 275 | — | 6.25 | 5.0 | 15,000 | 30 | 2.0 | — | — | — | 9/6 | EBC33 |
| ECC31 | Double Triode | Octal | 0.95 | 250 | — | 4.6 | 6.0 | 14,000 | 32 | 2.3 | — | — | — | 15/- | ECC31 |
| ECC32 | Double Triode (Separate Cathodes) | Octal | 0.95 | 250 | — | 4.6 | 6.0 | 14,000 | 32 | 2.3 | — | — | — | 15/- | ECC32 |
| EL2 | Output Pentode | P. Base | 0.2 | 250 | 250 | 18.0 | 32.0 | 70,000 | — | 2.8 | 3.6 | 8,000 | — | 11/6 | EL2 |
| EL32 | Output Pentode | Octal | 0.2 | 250 | 250 | 18.0 | 32.0 | 70,000 | — | 2.8 | 3.6 | 8,000 | — | 11/6 | EL32 |
| EL3 | Output Pentode | P. Base | 0.9 | 250 | 250 | 6.0 | 36.0 | 50,000 | — | 9.0 | 4.5 | 7,000 | — | 10/6 | EL3 |
| EL33 | Output Pentode | Octal | 0.9 | 250 | 250 | 6.0 | 36.0 | 50,000 | — | 9.0 | 4.5 | 7,000 | — | 10/6 | EL33 |
| EL35 | Output Pentode | Octal | 1.35 | 250 | 250 | 15.5 | 72.0 | 15,500 | — | 5.0 | 6.0 | 2,500 | — | 15/- | EL35 |
| EL37 | Output Pentode | Octal | 1.4 | 400 | 400 | 34.5 | 2 x 141 | — | — | — | 66.0† | 3,250 | — | 15/- | EL37 |
| EL50 | Output Pentode | P. Base | 1.35 | 250 | 275 | 14.0 | 72.0 | 22,000 | — | 8.5 | 8.8 | 3,500 | — | 20/- | EL50 |
| EBL1 | Double-diode Output Pentode | P. Base | 1.5 | 250 | 250 | 6.0 | 36.0 | 50,000 | — | 9.5 | 4.3 | 7,000 | — | 12/6 | EBL1 |
| EBL31 | Double-diode Output Pentode | Octal | 1.5 | 250 | 250 | 6.0 | 36.0 | 50,000 | — | 9.5 | 4.3 | 7,000 | — | 12/6 | EBL31 |

* $V_{g3} + 5 = 50 \text{ V.}$

† Data for 2 x EL37 In Class AB₁ push-pull

DIRECTLY-HEATED RANGE. $V_f = 4.0 \text{ V.}$ unless otherwise stated.

| Type | Description | No. of Base Pins | Working Conditions | | | | | Characteristics at Working Conditions | | | | | Optimum Load Ohms | Price | Type |
|-------|----------------|------------------|--------------------|-----|-----|------|------|---------------------------------------|-------|----------|-------|--------|-------------------|-------|-------|
| | | | If | Va | Vg2 | -Vg | Ia | ra | μ | gm or gc | W out | | | | |
| AC044 | Output Triode | 4 | 1.0 | 300 | — | 38.0 | 50.0 | 1,200 | 6.0 | 5.0 | 3.5 | 2,300 | — | 9/6 | AC044 |
| AC042 | Output Triode | 4 | 2.0V 2.0A | 300 | — | 38.0 | 50.0 | 1,200 | 6.0 | 5.0 | 3.5 | 2,300 | — | 9/6 | AC042 |
| PM24A | Output Pentode | 5 | 0.275 | 300 | 200 | 22.5 | 20.0 | — | — | 2.0 | — | 10,000 | — | 15/- | PM24A |
| PM24M | Output Pentode | 5 | 1.1 | 250 | 250 | 17.0 | 30.0 | 43,000 | 130 | 3.0 | 2.8 | 7,000 | — | 10/6 | PM24M |
| D024 | Output Triode | 4 | 1.85 | 400 | — | 40.0 | 63.0 | 1,070 | 8.0 | 7.5 | 7.1 | 3,200 | — | 20/- | D024 |
| D026 | Output Triode | 4 | 2.0 | 400 | — | 92.0 | 63.0 | 950 | 3.6 | 3.8 | 7.5 | 3,000 | — | 25/- | D026 |
| D030 | Output Triode | 4 | 2.0 | 500 | — | 134 | 60.0 | 580 | 4.0 | 6.9 | 11 | 6,000 | — | 25/- | D030 |

INDIRECTLY-HEATED 4.0 V. A.C. RANGE.

| Type | Description | No. of Base Pins | Working Conditions | | | | | Characteristics at Working Conditions | | | | | Optimum Load Ohms | Price | Type |
|--------|---|------------------|--------------------|-----|-----|------|------|---------------------------------------|-------|----------|-------|--------|-------------------|--------|------|
| | | | If | Va | Vg2 | -Vg | la | ra | μ | gm or gc | W out | | | | |
| TH4B | Triode Hexode | 7 | 1.45 | 250 | 100 | 2.5 | 3.25 | 1,500,000 | — | 0.75 | — | — | — | 11/6 | TH4B |
| FC4 | Octode Frequency Changer | 7 | 0.65 | 250 | 90* | 1.5 | 1.6 | — | — | 0.6 | — | — | — | 11/6 | FC4 |
| VP4 | Vari-mu H.F. Pentode | 5 or 7 | 1.0 | 200 | 100 | 2-50 | 4.5 | 1,000,000 | 2,000 | 2.3 | — | — | — | 10/6 | VP4 |
| VP4A | Vari-mu H.F. Pentode | 5 or 7 | 1.2 | 200 | 100 | 2.0 | 4.25 | 1,400,000 | 3,500 | 2.5 | — | — | — | 10/6 | VP4A |
| VP4B | Vari-mu H.F. Pentode | 7 | 0.65 | 250 | 250 | 3.0 | 11.5 | — | — | 2.0 | — | — | — | 10/6 | VP4B |
| SP4 | H.F. Pentode (M. or C.) | 5 or 7 | 1.0 | 200 | 100 | 2.0 | 3.0 | 2,200,000 | 5,000 | 2.3 | — | — | — | 10/6 | SP4 |
| SP4B | H.F. Pentode | 7 | 0.65 | 250 | 250 | 2.4 | 4.0 | 2,000,000 | 6,800 | 3.4 | — | — | — | 10/6 | SP4B |
| TSP4 | Television Pentode | 7 | 1.3 | 200 | 200 | 2.5 | 8.0 | 1,590,000 | 7,630 | 4.73 | — | — | — | 17/6 | TSP4 |
| 2D4A | Double-diode | 5 | 0.65 | 200 | — | — | 0.8 | — | — | — | — | — | — | 5/6 | 2D4A |
| TDD4 | Double-diode Triode | 7 | 0.65 | 250 | — | 7.0 | 4.0 | 13,500 | 27 | 2.0 | — | — | — | 9/6 | TDD4 |
| 904V | High Impedance Triode | 5 | 0.65 | 200 | — | 2.0 | 2.2 | 20,600 | 72 | 3.5 | — | — | — | 7/6 | 904V |
| 354V | Medium Impedance Triode (M. or C.) | 5 | 0.65 | 250 | — | 4.5 | 6.5 | 11,500 | 40 | 3.5 | — | — | — | 7/6 | 354V |
| 164V | Medium Impedance Triode | 5 | 0.65 | 200 | — | 8.5 | 13.0 | 3,660 | 16.4 | 4.5 | — | — | — | 14/- | 164V |
| Pen4VA | Output Pentode | 5 or 7 | 1.35 | 250 | 250 | 22.0 | 36.0 | 40,000 | — | 2.8 | 3.8 | 6,000 | 10/6 | Pen4VA | |
| PenA4 | Output Pentode | 7 | 1.95 | 250 | 250 | 5.8 | 36.0 | 50,000 | — | 9.5 | 3.8 | 8,000 | 10/6 | PenA4 | |
| PenB4 | Output Pentode | 7 | 2.1 | 250 | 275 | 14.0 | 72.0 | 22,000 | — | 8.5 | 8.8 | 3,500 | 12/- | PenB4 | |
| Pen4DD | Double-diode Output Pentode | 7 | 2.25 | 250 | 250 | 6.0 | 36.0 | 50,900 | — | 9.5 | 4.3 | 7,000 | 12/6 | Pen4DD | |
| Pen428 | Output Pentode | 7 | 2.1 | 375 | 275 | 20.5 | 2x48 | — | — | 2.8 | 8.0 | 6,500† | 25/- | Pen428 | |

* Vg3 + 5 = 70 V.

† Data for 2 x Pen428 in ClassAB Push-pull

DC/AC VALVES.

| Type | Description | No. of Base Pins | Working Conditions | | | | | Characteristics at Working Conditions | | | | | Optimum Load Ohms | Price | Type |
|---------|---|------------------|--------------------|-----|-----|-----|-----|---------------------------------------|-----------|-------|----------|-------|-------------------|-------|---------|
| | | | Vf | If | Va | Vg2 | -Vg | la | ra | μ | gm or gc | W out | | | |
| EM1 | Tuning Indicator | P. Base | 6.3 | 0.2 | 250 | — | 0-5 | — | — | — | — | — | — | 9/- | EM1 |
| CCH35 | Triode Hexode Frequency Changer | Octal | 7.0 | 0.2 | 250 | 100 | 2.0 | 3.0 | 1,300,000 | — | 0.65 | — | — | 11/6 | CCH35 |
| TH21C | Triode Hexode Frequency Changer | 7 | 21.0 | 0.2 | 250 | 70 | 1.5 | 4.0 | 1,500,000 | — | 1.0 | — | — | 12/6 | TH21C |
| TH30C | Triode Heptode Frequency Changer | 7 | 29.0 | 0.2 | 250 | 100 | 2.5 | 3.25 | 1,500,000 | — | 0.75 | — | — | 11/6 | TH30C |
| FC13 | Octode Frequency Changer | P. Base | 13.0 | 0.2 | 200 | 90* | 1.5 | 1.6 | — | — | 0.6 | — | — | 11/6 | FC13 |
| FC13C | Octode Frequency Changer | 7 | 13.0 | 0.2 | 200 | 90* | 1.5 | 1.6 | — | — | 0.6 | — | — | 11/6 | FC13C |
| VP13A | Vari-mu H.F. Pentode | P. Base | 13.0 | 0.2 | 200 | 100 | 2.0 | 4.0 | — | 2,200 | 2.2 | — | — | 10/6 | VP13A |
| VP13C | Vari-mu H.F. Pentode | 7 | 13.0 | 0.2 | 200 | 200 | 2.0 | 9.0 | — | — | 2.2 | — | — | 10/6 | VP13C |
| SP13 | H.F. Pentode | P. Base | 13.0 | 0.2 | 200 | 100 | 2.0 | 3.3 | 1,300,000 | 3,000 | 2.2 | — | — | 10/6 | SP13 |
| SP13C | H.F. Pentode | 7 | 13.0 | 0.2 | 200 | 200 | 2.2 | 2.5 | 2,500,000 | 7,000 | 2.8 | — | — | 10/6 | SP13C |
| 2D13C | Double-diode | 5 | 13.0 | 0.2 | 200 | — | — | 0.8 | — | — | — | — | — | 7/6 | 2D13C |
| HL13 | Medium Impedance Triode (m) | P. Base | 13.0 | 0.2 | 200 | — | 3.7 | 5.0 | 12,000 | 40 | 3.3 | — | — | 7/6 | HL13 |
| HL13C | Medium Impedance Triode (M) | 7 | 13.0 | 0.2 | 200 | — | 3.7 | 5.0 | 12,000 | 40 | 3.3 | — | — | 7/6 | HL13C |
| TDD13C | Double-diode Triode | 7 | 13.0 | 0.2 | 200 | — | 5.0 | 4.0 | 13,500 | 27 | 2.0 | — | — | 9/6 | TDD13 |
| Pen36C | Output Pentode | 7 | 33.0 | 0.2 | 200 | 200 | 8.5 | 45.0 | 35,000 | — | 8.0 | 4.0 | 4,500 | 10/6 | Pen36C |
| CL33 | Output Pentode | Octal | 33.0 | 0.2 | 200 | 200 | 8.5 | 45.0 | 35,000 | — | 8.0 | 4.0 | 4,500 | 10/6 | CL33 |
| Pen40DD | Double-diode Output Pentode | 7 | 44.0 | 0.2 | 200 | 200 | 8.5 | 45.0 | 35,000 | — | 8.0 | 4.0 | 4,500 | 12/6 | Pen40DD |
| CBL1 | Double-diode Output Pentode | P. Base | 44.0 | 0.2 | 200 | 200 | 8.5 | 45.0 | 35,000 | — | 8.0 | 4.0 | 4,500 | 12/6 | CBL1 |
| CBL31 | Double-diode Output Pentode | Octal | 44.0 | 0.2 | 200 | 200 | 8.5 | 45.0 | 35,000 | — | 8.0 | 4.0 | 4,500 | 12/6 | CBL31 |
| CL4 | Output Pentode | P. Base | 33.0 | 0.2 | 200 | 200 | 8.5 | 45.0 | 35,000 | — | 8.0 | 4.0 | 4,500 | 10/6 | CL4 |

* Vg3 + 5 = 70 V.

| RECTIFIERS. | | | | | | | | | | | |
|-------------|---------------------------------------|------------------|-----|------|---------------|----------------------------|-------|---------|--|--|--|
| Type | Description | No. of Base Pins | Vf | If | Max. Va (RMS) | Max. Rectified Output (mA) | Price | Type | | | |
| DW2 | Directly-heated Full-wave Rectifier | 4 | 4.0 | 1.0 | 250-0-250 | 60 | 9/- | DW2 | | | |
| DW4/350 | Directly-heated Full-wave Rectifier | 4 | 4.0 | 2.0 | 350-0-350 | 120 | 9/- | DW4/350 | | | |
| IW4/350 | Indirectly-heated Full-wave Rectifier | 4 | 4.0 | 2.0 | 350-0-350 | 120 | 9/- | IW4/350 | | | |
| IW4/500 | Indirectly-heated Full-wave Rectifier | 4 | 4.0 | 2.4 | 500-0-500 | 120 | 10/6 | IW4/500 | | | |
| FW4/500 | Directly-heated Full-wave Rectifier | 4 | 4.0 | 3.0 | 500-0-500 | 250 | 15/- | FW4/500 | | | |
| FW4/800 | Directly-heated Full-wave Rectifier | 4 | 4.0 | 3.0 | 850-0-850 | 125 | 15/- | FW4/800 | | | |
| CY1 | Half-wave Rectifier | P. Base Octal | 20 | 0.2 | 250 | 75 | 9/- | CY1 | | | |
| CY31 | | | | | | | | | | | |
| UR1C | | | | | | | | | | | |
| UR3C | Multiple Rectifier | 7 | 30 | 0.2 | 250-0-250 | 120 | 9/- | UR3C | | | |
| AZ1 | Directly-heated Full-wave Rectifier | P. Base Octal | 4 | 1.1 | 300-0-300 | 100 | 9/- | AZ1 | | | |
| AZ31 | | | | | | | | | | | |
| AZ50 | Directly-heated Full-wave Rectifier | 4 | 4.0 | 3.0 | 500-0-500 | 250 | 15/- | AZ50 | | | |
| HVR2 | High Voltage Rectifier | 4 | 4.0 | 0.65 | 6,000 | 3.0 | 20/- | HVR2 | | | |
| HVR2A | High Voltage Rectifier | 4 | 2.0 | 1.5 | 6,000 | 3.0 | 20/- | HVR2A | | | |

| MISCELLANEOUS TYPES. | | | | | | | | | | | | | | | |
|----------------------|----------------------------------|------------------|-----------------------------|----|-----|---------------------------|-----|---------------------------------------|-----|----------|-------|---|-------------------|-------|------|
| Type | Description | No. of Base Pins | Working Conditions | | | | | Characteristics at Working Conditions | | | | | Optimum Load Ohms | Price | Type |
| | | | If | Va | Vg2 | -Vg | Ia | ra | μ | gm or gc | W out | | | | |
| DA3 | Output Triode for Deaf Aids | Miniature 4 | 2.0V | 40 | — | 2.8 | 1.8 | 7,600 | 4.7 | 0.62 | — | — | 15/- | DA3 | |
| DF51 | Amplifying Pentode for Deaf Aids | Miniature 4 | 0.05A | | 45 | 13.5 | 0 | 0.125 | — | — | 0.17 | — | — | 17/6 | DF51 |
| 7475 | Neon Stabilising Tube | 4 | Burning voltage = 90-110 V. | | | Quiescent Current = 4 mA. | | | | | — | — | 12/6 | 7475 | |

| AMERTY RANGE (OCTAL TYPES). | | | | | | | | | | | |
|-----------------------------|---------------------------------------|-------|-------|----------------------------------|-------|--|--|--|--|--|--|
| Type | Description | Price | Type | Description | Price | | | | | | |
| 1A7G | Battery Pentagrid Frequency Changer | 10/6 | 6A8G | Pentagrid Frequency Changer | 11/6 | | | | | | |
| 1C5G | Battery Output Pentode | 9/- | 6F6G | Output Pentode | 10/6 | | | | | | |
| 1H5G | Battery Single-diode Triode | 7/6 | 6H6G | Double-diode (separate cathodes) | 5/6 | | | | | | |
| 1N5G | Battery H.F. Pentode | 9/- | 6K7G | Vari-mu H.F. Pentode | 10/6 | | | | | | |
| 3Q5GT | Battery Beam Power Tetrode | 9/- | 6K8G | Triode Hexode Frequency Changer | 11/6 | | | | | | |
| 5U4G | Directly-heated Full-wave Rectifier | 15/- | 6L6G | Beam Power Tetrode | 15/- | | | | | | |
| 5V4G | Indirectly-heated Full-wave Rectifier | 9/- | 6Q7G | Double-diode Triode | 9/6 | | | | | | |
| 5Y3G | Directly-heated Full-wave Rectifier | 9/- | 6R7G | Double-diode Triode | 9/6 | | | | | | |
| 5Z4GT | Indirectly-heated Full-wave Rectifier | 9/- | 25A6G | Output Pentode | 10/6 | | | | | | |

| AMERTY RANGE (U.X. and U.Y. TYPES). | | | | | | | | | | | |
|-------------------------------------|------------------|-------|------|-------------------------------------|-------|--|--|--|--|--|--|
| Type | Description | Price | Type | Description | Price | | | | | | |
| 6GS/6US | Tuning Indicator | 8/6 | 75 | Double-diode Triode | 9/6 | | | | | | |
| 18 | Output Pentode | 10/6 | 78 | Vari-mu H.F. Pentode | 10/6 | | | | | | |
| 42 | Output Pentode | 10/6 | 80 | Directly-heated Full-wave Rectifier | 9/- | | | | | | |
| 43 | Output Pentode | 10/6 | | | | | | | | | |

EQUIVALENT TABLES

2-VOLT VALVES

| Cosmor | Ever-Ready | Ferranti | Mullard | Marconi-Osram | Mazda | Brimar |
|----------------------|------------|-----------------|---------|------------------------|------------------|--------|
| 220TH | — | — | TH2 | X23, X24 | — | — |
| 210PG } 210SPG } | K80A | {VHT2 VHT2A} | FC2 | X21 | — | — |
| 210PGA | K80B | — | FC2A | X22 | — | — |
| 210VPT } 210VPA } | K50M | — | VP2 | VP21, W21 | {VP215 VP210} | — |
| — | K50N | — | VP2B | — | — | — |
| 210SPT | — | — | SP2 | Z21 | {SP215 SP210} | — |
| 220VS } 220VSG } | K40N | VS2 | PM12M | VS24 | S215VM | — |
| 210DDT | K23B | H2D | TDD2A | {HD22 HD23 HD24} | HL2/1DD | — |
| 210HL | K30K | — | PM2HL | {HL2 HL21} | {HL210 HL2} | HLB1 |
| 220PA | K30G | L2 | PM2A | LP2 | P220 | PB1 |
| 220B } 240B } | K33A | HP2 | PM2B | — | PD220 | — |
| 220HPT } 220/OT } | K70B | PT2 | PM22A | PT2, KT2 | Pen220 | PenB1 |
| — | K70D | — | PM22D | {KT21 KT24} | Pen231 | — |
| 230XP | — | — | PM202 | {P2/B P240} | {P220A P240} | — |
| 240QP | — | — | QP22B | — | QP230 | — |

INDIRECTLY-HEATED A.C. VALVES

| Cosmor | Ever-Ready | Ferranti | Mullard | Marconi-Osram | Mazda | Brimar |
|--------------------|----------------|--------------------------|---------|------------------------|-----------------|----------------|
| 4THA | {A36C A36B} | — | TH4B | — | AC/TH1 | 20A1 |
| 41MPG } 41PGD } | A80A | VHT4 | FC4 | {MX40 X42} | — | 15A2 |
| MVS/Pen | A50M | {VPT4 VPT4A VPT4B} | VP4 | VPM4 | AC/VP1 | 9A1 |
| — | A50N | — | VP4A | VMP4G | — | — |
| MVSPenB | A50P | — | VP4B | — | AC/VP2 | — |
| MS/PenA | A50A | {SPT4 SPT4A} | SP4 | MSP4 | AC/S2Pen | 6A1 |
| MS/PenB | A50B | — | SP4B | — | — | — |
| DD4 } DDL4 } | A20B | — | 2D4A | D41 | {AC/DD V914} | DDA1 |
| DDT | A23A | H4D | TDD4 | {MHD4 DH42 MH41} | AC/HLDD | {11A1 11A2} |
| 41MTB | A30B | — | 904V | — | AC2/HL | HLA1 |
| 41MHF } 41MTL } | A30D | D4 | 354V | MH4 | AC/HL | HLA2 |

INDIRECTLY-HEATED A.C. VALVES—continued.

| Cosmor | Ever-Ready | Ferranti | Mullard | Marconi-Osram | Mazda | Brimar |
|-----------------------|--------------------------------|----------|--|---------------|---------------------------------|--------|
| MP/PenA | A70B | — | Pen4VA | {N40 KT42} | AC/Pen | 7A2 |
| 42/OT } 42MP/Pen } | {A70C A70D A70E A27D} | PT4 | {Pen4VB Pen4A Pen4B Pen4DD Pen4ZB} | {N41 KT41} | {AC2/Pen AC5/Pen AC4/Pen} | 7A3 |
| — | — | — | — | — | — | — |
| — | — | — | — | — | — | — |

DIRECTLY-HEATED A.C. OUTPUT VALVES

| Cosmor | Ever-Ready | Ferranti | Mullard | Marconi-Osram | Mazda | Brimar |
|--------|------------|----------|---------|---------------|---------|--------|
| 4XP | S30C | LP4 | ACO44 | PX4 | PP3/250 | — |
| 2XP | S30D | — | ACO42 | — | PA20 | — |
| — | — | — | PM24A | — | — | — |
| PT41 | — | — | PM24M | PT4 | — | PenA1 |
| — | — | — | DO24 | PX25 | PP5/400 | — |
| — | — | — | DO26 | PX25A | — | — |
| — | — | — | DO30 | DA30 | PA40 | — |

RECTIFYING VALVES

| Cosmor | Ever-Ready | Ferranti | Mullard | Marconi-Osram | Mazda | Brimar | Phillips |
|--------------------|------------|----------|---------|-------------------|-----------|--------|----------|
| 408BU } 506BU } | S11A | — | DW2 | 410 | — | — | 1821 |
| 442BU | S11D | R4 | DW4/350 | U12 | UU120/350 | — | 1807 |
| 431U | A11D | — | IW4/350 | — | — | — | — |
| 441U | A11C | — | IW4/500 | {MU14 MU12/14} | UU5 | R3 | 1861 |
| 4100BU } 451U } | — | — | FW4/500 | U18 | — | — | FW4/500 |
| 40SUA | C10B | RZ | URIC | — | U4020 | — | — |

UNIVERSAL (A.C.—D.C.) VALVES

| Cosmor | Ever-Ready | Ferranti | Mullard | Marconi-Osram | Mazda | Brimar |
|---------------------|----------------|----------|---------|---------------|----------------------|--------|
| 2025TH | C36A | — | TH21C | — | TH2320 | — |
| 302THA | {C36C C36B} | — | TH30C | — | TH2321 | — |
| 13PGA } 202MPG } | C80B | VHTA | FC13C | — | — | 15D1 |
| — | C50N | — | VP13C | — | VP1322 | — |
| — | C50B | — | SP13C | — | — | — |
| — | C20C | ZD | 2D13C | — | DD620 | 10D1 |
| 13DHA } 202DDT } | C23B | HAD | TDD13C | — | HL/DD1320 | 11D3 |
| — | C30B | DA | HL13C | — | HL1320 | 4D1 |
| — | C70D | — | Pen36C | — | {Pen3520 Pen3820} | 7D6 |
| — | C27D | — | Pen40DD | — | — | — |

REPLACEMENT AND SUBSTITUTION TYPES

EXPLANATION OF ELECTRODE SYMBOLS

| | | |
|---|--|--|
| <p>A, A1, A2 Ao D, D1, D2 F H G Go K, K1, K2 M S</p> | <p>Anodes Oscillator Anode Diode Anodes Filament Heater Grid. Grids marked G1, G2, etc., G1 being nearest the cathode Oscillator Grid Cathode Metallising Screen</p> | <p>The symbol "TC" shown in the base connections is used to indicate the top cap.</p> <p>Where marked with * there is no recommended substitute.</p> <p>A radio set may not perform with the same degree of efficiency when a substitution is made for the original valve. The purpose of this information is to assist in keeping sets in operation under present conditions.</p> <p>This list is issued subject to additions and alterations without notification.</p> |
|---|--|--|

| Original Type | Base | Substitute Type | Base | Remarks | | | | | | | | | | | | | | |
|---------------|------|-----------------|------|---|----|----|---|---|-------|----|---|-------|----|----|---|---|----|----|
| AC054 | A | AC044 | A | Redesign circuit | | | | | | | | | | | | | | |
| AC064 | A | ACO44 | A | Redesign circuit | | | | | | | | | | | | | | |
| AC084 | A | ACO44 | A | Redesign circuit | | | | | | | | | | | | | | |
| ACO84N | A | ACO44 | A | Redesign circuit | | | | | | | | | | | | | | |
| AC104 | A | ACO44 | A | Redesign circuit | | | | | | | | | | | | | | |
| AL60 | M | PenB4 | M | Re-wire base, change cathode resistance to 175 ohms. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>Conn.</td><td>G1</td><td>G2</td><td>H</td><td>H</td><td>K</td><td>A</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | Conn. | G1 | G2 | H | H | K | A |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | | | | | | | | | | | | |
| Conn. | G1 | G2 | H | H | K | A | | | | | | | | | | | | |
| AZ2 | P | FW4/500 | A | Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>Conn.</td><td>A1</td><td>A</td><td>F F</td></tr></table> | 1 | 2 | 3 | 4 | Conn. | A1 | A | F F | | | | | | |
| 1 | 2 | 3 | 4 | | | | | | | | | | | | | | | |
| Conn. | A1 | A | F F | | | | | | | | | | | | | | | |
| AZ3 | P | IW4/350 | A | No circuit change. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>Conn.</td><td>A1</td><td>A</td><td>F F</td></tr></table> | 1 | 2 | 3 | 4 | Conn. | A1 | A | F F | | | | | | |
| 1 | 2 | 3 | 4 | | | | | | | | | | | | | | | |
| Conn. | A1 | A | F F | | | | | | | | | | | | | | | |
| AZ32 | K | FW4/500 | A | Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>Conn.</td><td>A1</td><td>A</td><td>F F</td></tr></table> | 1 | 2 | 3 | 4 | Conn. | A1 | A | F F | | | | | | |
| 1 | 2 | 3 | 4 | | | | | | | | | | | | | | | |
| Conn. | A1 | A | F F | | | | | | | | | | | | | | | |
| AZ33 | K | IW4/350 | A | No circuit change. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>Conn.</td><td>A1</td><td>A</td><td>F F</td></tr></table> | 1 | 2 | 3 | 4 | Conn. | A1 | A | F F | | | | | | |
| 1 | 2 | 3 | 4 | | | | | | | | | | | | | | | |
| Conn. | A1 | A | F F | | | | | | | | | | | | | | | |
| CL6 | P | CL4 | P | Change bias resistance to 170 ohms. Raise Vg2 to 200 V. | | | | | | | | | | | | | | |
| CY2 | P | UR3C | M | No circuit change. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>Conn.</td><td>A1</td><td>K1</td><td>H</td><td>H</td><td>K2</td><td>A2</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | Conn. | A1 | K1 | H | H | K2 | A2 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | | | | | | | | | | | | |
| Conn. | A1 | K1 | H | H | K2 | A2 | | | | | | | | | | | | |

| Original Type | Base | Substitute Type | Base | Remarks | | | | | | | | | | | | | | | | | | | |
|---------------|------|-----------------|------|---|----|----|-------|-------|----|---|---|-------|-------|-------|---|----|----|--------|----|----|-------|---|----|
| CY32 | K | UR3C | M | No circuit change. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td></tr><tr><td>Conn.</td><td>A1</td><td>K1</td><td>H</td><td>H</td><td>K2</td><td>A2</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | Conn. | A1 | K1 | H | H | K2 | A2 | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | | | | | | | | | | | | | | | | | |
| Conn. | A1 | K1 | H | H | K2 | A2 | | | | | | | | | | | | | | | | | |
| DF1 | P | DF33 | K | No circuit change. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>TC</td></tr><tr><td>Conn.</td><td>m</td><td>f+</td><td>a</td><td>g2</td><td>—</td><td>—</td><td>f, g3</td><td>—</td><td>g1</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | TC | Conn. | m | f+ | a | g2 | — | — | f, g3 | — | g1 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | TC | | | | | | | | | | | | | | | |
| Conn. | m | f+ | a | g2 | — | — | f, g3 | — | g1 | | | | | | | | | | | | | | |
| DK1 | P | DK32 | K | Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>TC</td></tr><tr><td>Conn.</td><td>M</td><td>H</td><td>A</td><td>G3, G5</td><td>G1</td><td>G2</td><td>H</td><td>—</td><td>G4</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | TC | Conn. | M | H | A | G3, G5 | G1 | G2 | H | — | G4 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | TC | | | | | | | | | | | | | | | |
| Conn. | M | H | A | G3, G5 | G1 | G2 | H | — | G4 | | | | | | | | | | | | | | |
| DAC1 | P | DAC32 | K | Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>TC</td></tr><tr><td>Conn.</td><td>M</td><td>H</td><td>A</td><td>—</td><td>D</td><td>—</td><td>H</td><td>—</td><td>G1</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | TC | Conn. | M | H | A | — | D | — | H | — | G1 |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | TC | | | | | | | | | | | | | | | |
| Conn. | M | H | A | — | D | — | H | — | G1 | | | | | | | | | | | | | | |
| DL2 | P | DL35 | K | Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr><tr><td>Conn.</td><td>—</td><td>H</td><td>A</td><td>G2</td><td>G1</td><td>—</td><td>H</td><td>—</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | Conn. | — | H | A | G2 | G1 | — | H | — | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | | | | | | | | | | | | | |
| Conn. | — | H | A | G2 | G1 | — | H | — | | | | | | | | | | | | | | | |
| *DL51 | G | — | — | — | | | | | | | | | | | | | | | | | | | |
| *DO20 | A | — | — | — | | | | | | | | | | | | | | | | | | | |
| DO25 | A | DO26 | A | Add series filament resistance of 1 ohm, 10 watts ; no further change. | | | | | | | | | | | | | | | | | | | |
| DW3 | A | DW4/350 | A | No change. | | | | | | | | | | | | | | | | | | | |
| DW4 | A | FW4/500 | A | No change. | | | | | | | | | | | | | | | | | | | |
| EAB1 | P | EB34 | K | Redesign circuit. (See Instructions at end of list.) | | | | | | | | | | | | | | | | | | | |
| EB4 | P | EB34 | K | No circuit change. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr><tr><td>Conn.</td><td>M, S</td><td>H</td><td>D1</td><td>K1</td><td>D2</td><td>—</td><td>H</td><td>K2</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | Conn. | M, S | H | D1 | K1 | D2 | — | H | K2 | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | | | | | | | | | | | | | |
| Conn. | M, S | H | D1 | K1 | D2 | — | H | K2 | | | | | | | | | | | | | | | |
| *EBF1 | P | — | — | — | | | | | | | | | | | | | | | | | | | |
| *EBF2 | P | — | — | — | | | | | | | | | | | | | | | | | | | |
| *EBF32 | K | — | — | — | | | | | | | | | | | | | | | | | | | |
| ECH2 | P | ECH3 | P | No change. ECH3 If=0.2A. | | | | | | | | | | | | | | | | | | | |
| ECH33 | K | CCH35 | K | For A.C./D.C. receivers—CCH35. For A.C. receivers—ECH35. | | | | | | | | | | | | | | | | | | | |
| EFM1 | P | EF9 | P | Redesign circuit without tuning indicator. (See Instructions at end of list). | | | | | | | | | | | | | | | | | | | |
| *EF1 | P | — | — | — | | | | | | | | | | | | | | | | | | | |
| EF2 | P | EF9 | P | EF9 has longer grid base. No change. | | | | | | | | | | | | | | | | | | | |
| EF3 | P | EF9 | P | No change. | | | | | | | | | | | | | | | | | | | |
| EF8 | P | EF9 | P | No change. | | | | | | | | | | | | | | | | | | | |
| EH2 | P | ECH3 | P | Use hexode section only in extreme cases. | | | | | | | | | | | | | | | | | | | |
| *EK1 | P | — | — | — | | | | | | | | | | | | | | | | | | | |
| EK3 | P | EK2 | P | Raise screen volts to 200. EK2 If=0.2A. | | | | | | | | | | | | | | | | | | | |
| EL5 | P | EL35 | K | EL35 Vg2=250 V. max. Change bias resistance to 180 ohms. Pin No. <table style="display: inline-table; border-collapse: collapse;"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr><tr><td>Conn.</td><td>—</td><td>H</td><td>A</td><td>G2</td><td>G1</td><td>—</td><td>H</td><td>G3, K</td></tr></table> | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | Conn. | — | H | A | G2 | G1 | — | H | G3, K | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | | | | | | | | | | | | | |
| Conn. | — | H | A | G2 | G1 | — | H | G3, K | | | | | | | | | | | | | | | |

| Original Type | Base | Substitute Type | Base | Remarks |
|---------------|------|-----------------|------|---|
| EL6 | P | EL35 | K | EL35 Vg2=250 V max. Change bias resistance to 180 ohms. Pin No. 1 2 3 4 5 6 7 B Conn. — H A G2 G1 — H G3, K |
| EL36 | K | EL35 | K | EL35 Vg2=250 V. max. Change bias resistance to 180 ohms. |
| *EM2 | P | — | — | — |
| *EM3 | P | — | — | — |
| *EZ2 | P | — | — | — |
| *EZ3 | P | — | — | — |
| *FZ1 | P | — | — | — |
| *HL20 | O | — | — | — |
| *HVR1 | A | — | — | — |
| IW3 | A | IW4/350 | A | No change. |
| IW4 | A | IW4/500 | A | No change. |
| MM4V | O | VP4 | O | No change. Volume control will not be so gradual in operation. |
| Pen4V | O | Pen4VA | O | Change grid bias to -22 volts. No change with automatic bias. |
| Pen4VB | M | PenA4 | M | No change. |
| *Pen13 | P | — | — | — |
| *Pen13C | M | — | — | — |
| *Pen20 | O/M | — | — | — |
| Pen26 | P | CL4 | P | Change bias resistance to 170 ohms. CL4 Vg2= 200 volts. |
| PM1A | A | PM2HL | A | No change. |
| PM1HF | A | PM2HL | A | No change. |
| PM1HL | A | PM2HL | A | No change. |
| PM1LF | A | PM2HL | A | Change grid bias to -1.5 volts. |
| PM2 | A | PM2A | A | Change grid bias to -6.0 volts. |
| PM2BA | M | PM2B | M | Remove bias supply from the valve. |
| PM2DL | A | PM2HL | A | No change. |
| PM2DX | A | PM2HL | A | No change. |
| *PM4 | A | — | — | — |
| *PM4DX | A | — | — | — |
| PM12 | A | PM12M | A | Raise Vg2 to 90 volts. |
| PM12A | A | PM12M | A | Raise Vg2 to 90 volts. |
| *PM13 | A/O | — | — | — |
| PM22 | A/O | PM22A | A/O | Change grid bias to -4.5 volts at Va=Vg2=135 volts, and anode load to approx. 19,000 ohms. |
| *PM22C | O | — | — | — |
| PM24 | A/O | PM24A | O | No circuit change. Pin No. 1 2 3 4 5 Conn. A G1 F F G2 |
| PM24B | O | PM24M | O | Redesign circuit. PM24M Va=Vg2=250 volts max. |

| Original Type | Base | Substitute Type | Base | Remarks |
|---------------|------|--------------------|------|--|
| PM24C | O | PM24M | O | Redesign circuit. PM24M Va=Vg2=250 volts max. |
| *PM24D | O | — | — | — |
| *PM24E | O | — | — | — |
| *PM25 | A/O | — | — | — |
| *PM26 | O | — | — | — |
| PM252 | A | PM2A | A | Anode load=7,000 ohms. Change bias to -6.0 volts. |
| *QP22A | R | — | — | — |
| SD4 | M | TDD4 | M | Redesign circuit. (See instructions at end of list). |
| *SD20 | M | — | — | — |
| *SG20 | O | — | — | — |
| *SP20 | O | — | — | — |
| SP4C | P | SP4B | M | No circuit change. Pin No. 1 2 3 4 5 6 7 TC Conn. M A G3 H H K G2 G1 |
| S4V | A/O | S4VB or SP4 | O | No circuit change. Pin No. 1 2 3 4 5 TC Conn. G2 G1 H H K A |
| S4VA | O | S4VB or SP4 | O | No change. |
| TDD2 | O | TDD2A | O | Change grid bias to -1.5 volts. Not suitable as Class B driver. |
| TDD13 | P | TDD13C | M | No circuit change. Pin No. 1 2 3 4 5 6 7 TC Conn. D1 M D2 H H K A G1 |
| *TDD25 | M | — | — | — |
| TH4 | M | TH4B | M | Change bias resistance to 140 ohms. Grid leak to be increased to 50,000 ohms between grid and cathode. |
| TH4A | M | TH4B | M | No change. |
| *TH13C | M | — | — | — |
| TH22C | M | TH30C | M | No change. |
| TH62 | K | { CCH35 ECH35 } | K | For A.C./D.C. receivers—CCH35. For A.C. receivers—ECH35. No change. |
| *TT4 | O | — | — | — |
| *TT4A | O | — | — | — |
| *TV4 | P | — | — | — |
| TV6 | P | EM1 | P | No change. |
| UR1 | P | CY1 | P | No change. |
| UR2 | P | UR3C | M | No circuit change. Pin No. 1 2 3 4 5 6 7 Conn. — A1 K1 H H K2 A2 |
| UR3 | P | UR3C | M | No circuit change. Pin No. 1 2 3 4 5 6 7 Conn. — A1 K1 H H K2 A2 |
| VM4V | O | S4VB or VP4 | O | No change. Volume control will not be so gradual in operation. |
| *VM20 | O | — | — | — |
| *VP20 | O | — | — | — |

| Original Type | Base | Substitute Type | Base | Remarks |
|---------------|------|-----------------|------|--|
| O54V | O | ACO44 | A | Redesign circuit. |
| 2D2 | O | TDD2A | — | .. (see instructions at foot of page) |
| 2D4 | O | 2D4A | O | No circuit change. Pin No. 1 2 3 4 5 Conn. D2 D1 H H K 2D4A has no top cap. |
| *2D4B | M | — | — | — |
| 2D13 | V | 2D13C | O | No circuit change. Pin No. 1 2 3 4 5 Conn. D2 D1 H H K |
| 2D13A | V | 2D13C | O | No circuit change. Pin No. 1 2 3 4 5 Conn. D2 D1 H H K |
| *104V | O | — | — | — |
| 154V | A | 164V | O | No circuit change. Pin No. 1 2 3 4 5 Conn. A G1 H H K Cathode connected to side terminal. |
| 244V | O | 354V | O | No change. |
| 484V | O | 354V | O | Change grid bias to -4.5 volts or bias resistance to 700 ohms. |
| 994V | O | 904V | O | No change. |
| 54VB | O | SP4 | O | No change. |

MULLARD VALVE TYPE EFMI—No supplies available.

With circuit modification this valve may be replaced by the Mullard Type EF9 in Mullard and Philips sets as detailed :—

- (1) Lead to contact 5 disconnected and insulated.
- (2) Lead to contact 6 disconnected and extended, and fitted with top cap adaptor to reach the top cap of the EF9.
- (3) Join together contacts 4 and 5.
- (4) Reduce the anode coupling and resistances from approximately 130,000 ohms to 50,000 ohms. It may be necessary to continue the screening on the lead formerly to contact 6 as far as the top cap, though in many cases this will not be necessary. Should the top cap of the EF9 touch the tuning scale it may be necessary to bend the platform for the EFMI slightly so as to give a small clearance. Under these conditions the set should operate as before but without the tuning indicator.

SUBSTITUTION OF TDD4 FOR THE SD4

Change connections as below :—

| Connections for SD4 | | Connections for TDD4 | |
|---------------------|---|-----------------------------|---------|
| Pin Number | | Pin Number | |
| 1 | Not used with SD4 | 1 | Top cap |
| 2 | Disconnect and take this lead to | } 4 5 6 3 7 | } |
| 3 | Disconnect and insulate end of lead | | |
| 4 | These connections remain as they are at present | | |
| 5 | | | |
| 6 | Disconnect and take lead to | | |
| 7 | | Disconnect and take lead to | |

Join together pins 1 and 6.

In some cases the lead to the top cap may have to be screened.

SUBSTITUTION OF EB34 FOR THE EAB1

| | | Contacts on— | |
|--|------------------------------------|-----------------------------|-------------|
| | | EAB1 holder. | EB34 holder |
| In Philips Receivers Types 753A and 895X, also Mullard MAS17, MAS109 and MAS112. | Contacts on— | No. 1 to | 1 |
| | Circuit alterations :— | 2 to | 2 |
| | | 3 to | 7 |
| | | 4 to | 4 |
| | | 5 to | 3 |
| | | 7 Insulate end of lead. | |
| | 8 to | 5 | |
| | 2. Change connections as opposite. | Join together pins 4 and 8. | |

Under these conditions the set should operate as before, but without the A.V.C. delay characteristic.

SUBSTITUTION OF TDD2A FOR THE 2D2

Change connections as below :—

| Connections for 2D2 | | Connections for TDD2A | |
|---------------------|-------------------------------------|-----------------------|--|
| Pin Number | | Pin Number | |
| 1 | Disconnect and take wire to | 5 | |
| 2 | As at present | 2 | |
| 3 | As at present | 3 | |
| 4 | As at present | 4 | |
| 5 | Disconnect and insulate end of lead | — | |

Also connect the earth end of the speech diode load to LT+, care being taken not to short out the grid bias supply.

Under these conditions the receiver should operate as before, but with a reduction of volume due to the removal of the A.V.C. delay voltage.



Mullard