



# stb

THE SOUND ENGINEERING MAGAZINE

DECEMBER 1974 \$1.00

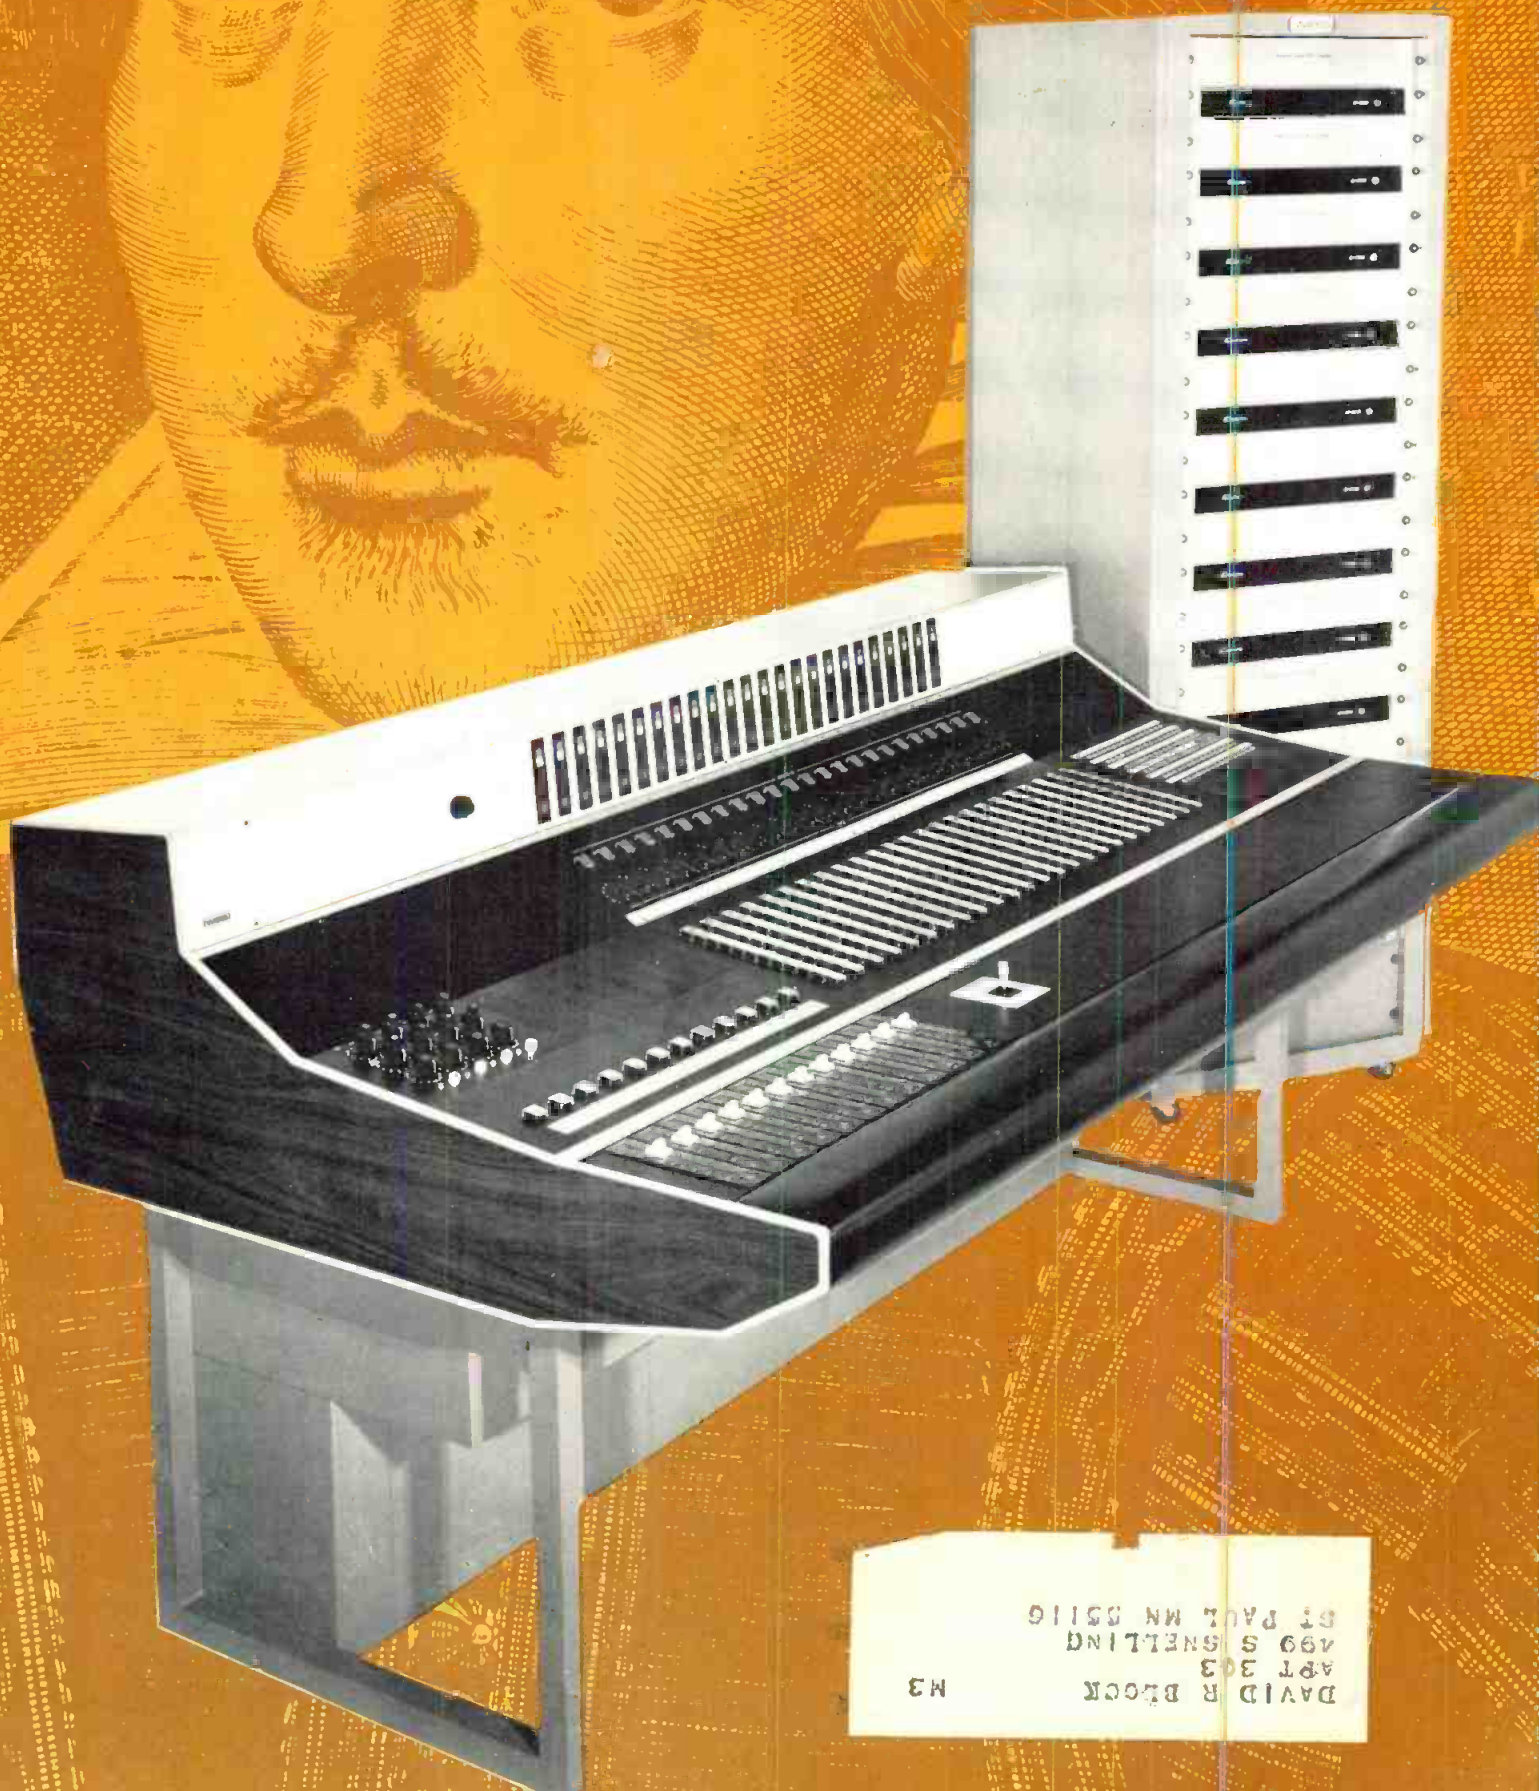

DAVID R. BLOOR  
APT 303  
499 S. GUNNING  
ST PAUL, MN 55116  
M3

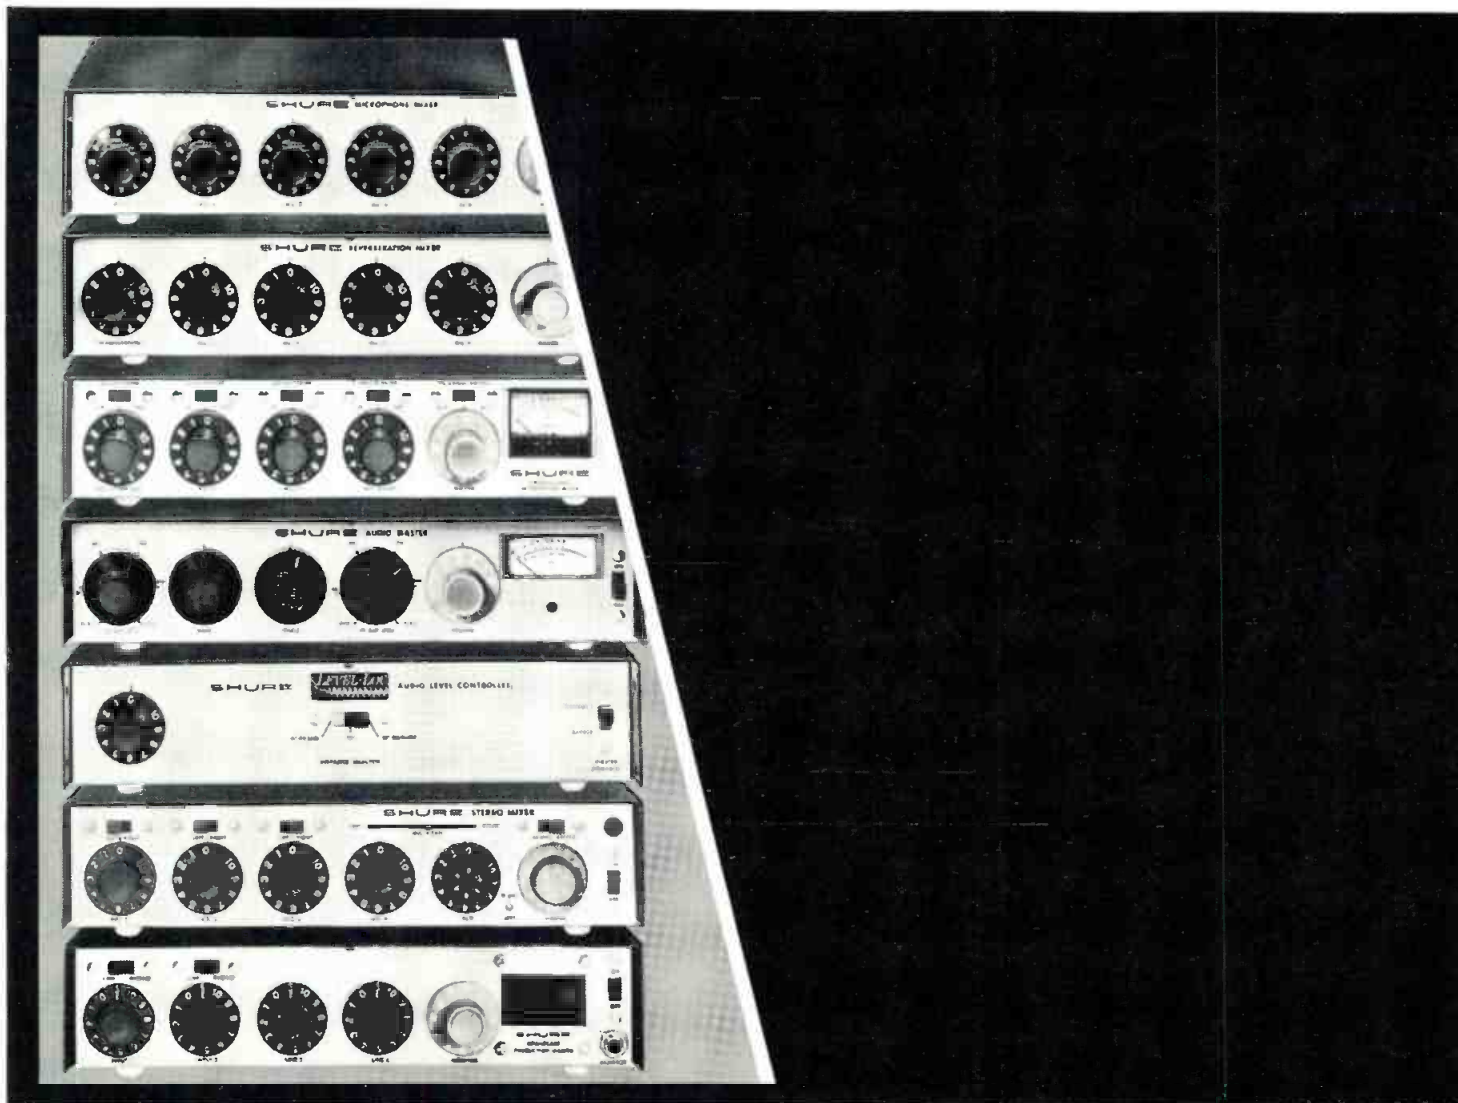

## The Magnificent Seven



We've been hearing unsolicited rave reviews from soundmen across the country concerning our seven ingeniously versatile problem-solving audio control components (1) *M68 Microphone Mixer*, vanguard of the low-cost, high-performance portable mixers; (2) *M68-RM Mixer*, with built-in reverb for vocalists and special effects; (3) *M67 Mixer*, the trail-blazing low-cost professional mixer; (4) *M63 Audio Control Center*, that gives you variable response shaping; (5) *M62V Level-Loc*, the audio level controller that automatically limits output level; (6) *M688 Stereo Mixer*, made to order for stereo recording and audio-visual work; and finally, (7) *M675 Broadcast Production Master*, that teams up with our M67 to give a complete broadcast production console (with cuing) for under \$325. Write for the new Shure Circuitry catalog that shows them all:

Shure Brothers Inc.  
222 Hartrey Ave., Evanston, Ill. 60204



Circle 10 on Reader Service Card

# COMING NEXT MONTH

● Robert Ehle returns to our pages with not one, but two articles. The first is entitled **WHAT TO LISTEN FOR IN ELECTRONIC MUSIC**. Because it takes the composer's point of view, recording engineers and producers will want to read it—if only to gain a broader understanding of what it is they are trying to record. The second article is a light-hearted treatment of a long-standing hobby of the author's. It details some of his adventures collecting old radios. Lots of nostalgia here.

In a totally serious engineering vein, Walter Jung details **OPTIMIZING OP-AMP SPEED**. If you have used op-amps you know that many have high-frequency speed problems that limit their value. But this need not be so.

Two issues to specially watch for are February and March. These will contain a group of articles all on the subject of tape and tape recording. If you use tape, these will be reference issues.

# ABOUT THE COVER

● The special console pictured was constructed for the Stratford Theater. Its use is detailed in the article on this system beginning on page 24.

Last month's (November) montage of electronics and musical instruments was constructed by Marshall King. The second part of his article on hearing appears in this issue on page 15.



THE SOUND ENGINEERING MAGAZINE

DECEMBER 1972 VOLUME 6, NUMBER 11

15	ON THE BUSINESS OF HEARING Marshall King
20	A STEREO PHASE INDICATOR David Robinson
24	THE SOUND SYSTEM OF STRATFORD Robert Scales
27	db VISITS—SCULLY-METROTECH
2	THE AUDIO ENGINEER'S HANDBOOK George Alexandrovich
8	THE SYNC TRACK John Woram
12	THEORY AND PRACTICE Norman H. Crowhurst
omitted this month	SOUND WITH IMAGES Martin Dickstein
30	BOOKCASE
31	CLASSIFIED
32	ANNUAL INDEX

db is listed in **Current Contents: Engineering and Technology**,

<b>Robert Bach</b> PUBLISHER	<b>Larry Zide</b> EDITOR
<b>Bob Laurie</b> ART DIRECTOR	<b>John Woram</b> ASSOCIATE EDITOR
<b>A. F. Gordon</b> CIRCULATION MANAGER	<b>Marilyn Gold</b> COPY EDITOR
<b>Eloise Beach</b> ASST. CIRCULATION MGR.	<b>Richard L. Lerner</b> ASSISTANT EDITOR
<b>GRAPHICS Crescent Art Service</b>	

db, the Sound Engineering Magazine is published monthly by Sagamore Publishing Company, Inc. Entire contents copyright © 1972 by Sagamore Publishing Co., Inc., 980 Old Country Road, Plainview, L.I., N.Y. 11803. Telephone (516) 433-6530. db is published for those individuals and firms in professional audio-recording, broadcast, audio-visual, sound reinforcement, consultants, video recording, film sound, etc. Application should be made on the subscription form in the rear of each issue. Subscriptions are \$6.00 per year (\$7.00 per year outside U. S. Possessions, Canada, and Mexico) in U. S. funds. Single copies are \$1.00 each. Controlled Circulation postage paid at Harrisburg, Pa. 17105. Editorial, Publishing, and Sales Offices: 980 Old Country Road, Plainview, New York 11803. Postmaster: Form 3579 should be sent to above address.

George Alexandrovich

# THE AUDIO ENGINEER'S HANDBOOK



THE SOUND ENGINEERING MAGAZINE

## SALES OFFICES

**New York**  
980 Old Country Road  
Plainview, N.Y. 11803  
516-433-6530

**Dallas**  
Roy McDonald Associates, Inc.  
Semmons Tower West  
Suite 714  
Dallas, Texas 75207  
214-637-2444

**Denver**  
Roy McDonald Associates, Inc.  
846 Lincoln Street  
Denver, Colorado 80203  
303-825-3325

**Houston**  
Roy McDonald Associates, Inc.  
3130 Southwest Freeway  
Houston, Texas 77006  
713-529-6711

**Los Angeles**  
Roy McDonald Associates, Inc.  
1313 West 8th Street  
Los Angeles, California 90018  
213-483-1304

**Portland**  
Roy McDonald Associates, Inc.  
2305 S. W. 58th Avenue  
Portland, Oregon 97221  
503-292-8521

**San Francisco**  
Roy McDonald Associates, Inc.  
625 Market Street  
San Francisco, California 94105  
415-397-5377

## Remote Powering Condenser Microphones

● Condenser microphones have been with us for more than a decade. During this time the technology of sound pickup has made substantial progress. Earlier types of condenser microphones were designed around vacuum tubes (consuming a lot of power), they were sometimes microphonic (in competition to the cell of the condenser mic), and required a fairly big metal box with long a.c. cord, pilot light, fuses and other trimmings.

There is nothing wrong with this, particularly if the microphone does something other mics can't do, or at least can't do as well. But all of a sudden hunger for more microphones and more channels started growing and mushrooming. No longer were two or three mics enough to do the job. Bass drums were being decorated with different types of mics, cords from the mics were scattered over the studio floor as the spaghetti in Sloppy Joe's kitchen. I wonder how many broken violins and ankles can be attributed to mic lines.

Came the age of semiconductors—transistors and FETs! Before, about 40 mA at 105 volts was required to drive a single U47A microphone. Now, with f.e.t.s in the picture, all

that is needed is something like 0.5 mA at 8-10 V to operate the solid-state amplifier. Naturally polarizing voltage has to be supplied to the microphone but there we use a couple of 21-volt batteries supplying only

## advertisers index

Audiotechniques . . . . .	9
Auditronics . . . . .	19
Automated Processes . . . . .	Cover 4
Community Light & Sound . . . . .	25
Dynaco . . . . .	6
Electro-Voice . . . . .	23
Fairchild Sound . . . . .	12
Gately . . . . .	8,26
Gotham Audio . . . . .	13
Interface Electronics . . . . .	25
International Telecomm . . . . .	10
Maxell . . . . .	3
Norelco-AKG . . . . .	4
Quad-Eight . . . . .	11
Revox . . . . .	Facing Cover 2
Shure . . . . .	Cover 2
Soundcraftsmen . . . . .	14
Spectra-Sonics . . . . .	5
Telex . . . . .	7
Timekeeper . . . . .	Cover 3,10,29

# What would you do if your tape was so good nobody believed you?

That's the situation we found ourselves in, with our Ultra Dynamic formulations.

Audio demonstrations weren't enough. People refused to believe their ears.

We had to prove how good we are.

So, we developed a visual demonstration of sound that enables people to see the difference between our UD tape and any other tape they choose. By looking at an oscilloscope screen, they can compare energy output, range, distortion, signal-to-noise ratio and presence of dropouts.

## Public Proof

Our first big public screening was the 1971 Consumer Electronics Show. Since then, we've been touring our demonstration all around the country. And since then, people have started to believe their ears as well as their eyes.

If you don't have an opportunity to see one of our demonstrations, try the Maxell Ultra Dynamic tape, in cassette or reel to reel, and try to believe your ears!

## Technicalities

We use a Hewlett Packard dual trace storage oscilloscope and a Hewlett Packard audio sweep generator. The lower trace on the oscilloscope pro-

vides a view of the output signal of the sweep generator. The upper trace provides a view of the same signal having been recorded and played back so you can see the performance characteristics of the tape. In the picture below, Maxell

Ultra Dynamic tape is shown against the sweep generator trace. The flare at the right indicates extended high frequency response. The uniformity of the trace indicates an extremely accurate overall response.



## MAXELL ULTRA DYNAMIC TAPE

Frequency Response (dB)	
1,000 Hz	+1.0
7,500 Hz	+6.0
12,500 Hz	+8.0
15,000 Hz	+10.0

Output Uniformity (dB)	
7,500 Hz	0.2

Distortion (%)	3.0
Dropout	0
Saturation Level (dB)	+15.0
Signal to Noise Ratio (dB)	63
Erasure (dB)	69

**You have to see our sound to believe it.**

For more information about the Maxell tape

line, write: Maxell, 501 Fifth Avenue, New York, New York 10017



# maxell®

The answer to all your tape needs.

Circle 27 on Reader Service Card

# Put an AKG on the job.



#10-12

## It will sound better!


For complete information  
on AKG performance at  
prices ranging from  
\$40. to \$75. net write to:



**MICROPHONES • HEADPHONES**

DISTRIBUTED BY  
NORTH AMERICAN PHILIPS CORPORATION  
100 EAST 42nd STREET, NEW YORK, NEW YORK 10017

Figure 1. Connections are made from the power supply to the mic connectors through precision resistors.

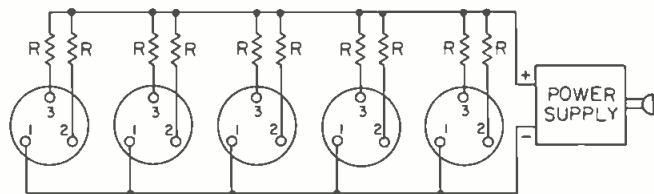

polarizing potential to the diaphragms with service life equal to the shelf life of the cells.

With a current of only 0.5 mA one would think that a couple of batteries would last long enough to warrant the omission of an a.c. power supply, but we should remember that batteries of the size to be considered for microphone use are designed with current supply capabilities of 1000 mA hours on the average (mercury cells). If you consider that some studios may operate around the clock—or if somebody forgets to shut off the power switch on the mic (a most likely situation) the batteries will be exhausted in little over two months—and the time they will quit on you is when you need them most.

No one would like this to happen to him. But it has happened many times and those with this sad experience have bought a.c. power supplies. Without abandoning the principle of variable capacitance transducer and its unsurpassed quality of sound transformation some clever engineer (whoever he is he has my admiration) thought of powering all of the microphones from a centrally-located power supply in such a way that standard three-conductor cable could carry needed power to the microphone and its amplifier, and the audio signals back without interference or degradation of performance of the microphone. For this the line has to be balanced and floating. The big advantage of the powering system is that it permits any other microphones to be connected in place of a

condenser mic without affecting the operation of the powering system. Usually the power supply with filtered d.c. is located inside the console or near the panel where microphones are plugged in. Connections are made from this power supply to every mic connector on the panel through precision resistors as shown in FIGURE 1.

From this drawing it can be seen that d.c. balance in the mic line depends primarily on the proper match of the resistors R. Equal potentials and currents appear at both red and black conductors. The shield carries the return currents. (It is often mentioned that the shield should not be allowed to carry any current otherwise it will affect conductors inside the shield. But in this case current flowing in the shield is pure d.c. with ripple currents well below the noise levels of the f.e.t. preamplifier.)

For this reason and for the reason of successful operation of the f.e.t. in the microphone, the power supply should be designed with multistage filtering with ripple voltages not exceeding few microvolts! If you consider that at mic levels of -60 dBm voltage is only about 1 millivolt and you have preamplifiers capable of maintaining input noise figure of -127 dBm, you should expect signal to noise would be 67 dB. One microvolt equals approximately 120 dBV, so seven dB below that is less than 1/2 a microvolt!

It is true that there is additional filtering in the f.e.t. preamp itself, but don't count on it too heavily since

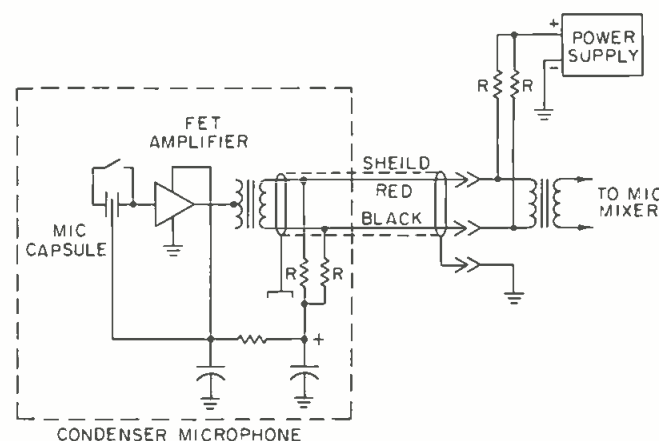


Figure 2. The complete circuit of a condenser powering system.

# NUMBER 1!



## "COMPLIMITER"™

**PERFORMANCE:** The SPECTRA SONICS Model 610 "COMPLIMITER"™ can accomplish, independently or simultaneously, limiting and compression functions with performance that is unequalled by most *linear amplifiers*. The minimal noise inherent in this system assures a low threshold of -40dB and permits an input sensitivity substantially greater than other systems. Through the use of the most advanced circuitry, the Model 610 "COMPLIMITER"™ has the fastest attack time (100 nanoseconds to 2 microseconds). The "COMPLIMITER"™ allows undistorted recording and transmission at levels that are measurably higher than those commonly in use. In tape recording, for example, this "limiting only" mode eliminates approximately 6dB usually set aside for tape overload protection.

**RELIABILITY:** The extensive use of the "COMPLIMITER"™ in the audio industry confirms the highest order of confidence in reliable, consistent operation.

Today's competition can only be met through the most advanced designs — "Beyond The State Of The Art." For more information on audio products of superior performance contact SPECTRA SONICS at:

70 Wall Avenue  
Provo, Utah 84404  
(801) 392-7531

6430 Sunset Blvd., Suite 1117  
Hollywood, Calif. 90028  
(213) 461-4321


**SPECTRA SONICS**

LEADER IN ADVANCED TECHNOLOGY



Circle 28 on Reader Service Card

# DYNACO ST-400

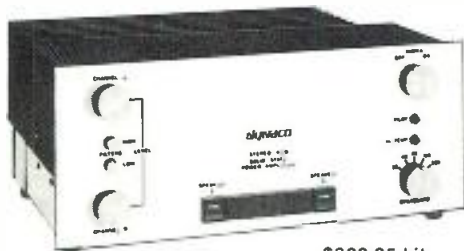

\$399.95 kit  
\$499.95 assembled

A new high power professional amplifier with unmatched performance, unrivaled stability and new levels of amplifier and load protection at remarkably low cost.

Typically conservative Dynaco power and distortion ratings, plus a mammoth heat sink with more than 1000 square inches of radiating area typify this totally new design. Unique Dynaguard™ load protection permits full power transient capability, but clamps sustained output above the selected level. Relay operated DC load protection, thermal cutout, volt-amp limiting, and provision for optional fan cooling. Class A operation up to several watts output, and exclusive IC-controlled Dynabias™ circuit assure no "crossover notch". Front panel speaker fuses and level controls have no affect on performance.


- Power output each channel, both channels driven:  
200 watts into 8 ohms  
300 watts into 4 ohms  
100 watts into 16 ohms.
- Output may be bridged to provide 600 watts mono into 8 ohms or direct to a 70.7 volt line.
- THD and IM distortion well below 0.25% from zero to full power.
- 200 watt response at 8 ohms: ±0.25 dB 20 Hz to 20 kHz.
- Half megohm input impedance.

WRITE FOR  
DETAILED SPECIFICATIONS

## DYNACO INC.

3060 JEFFERSON STREET  
PHILADELPHIA, PA. 19121

Figure 3. A simple low ripple supply for remote powering.

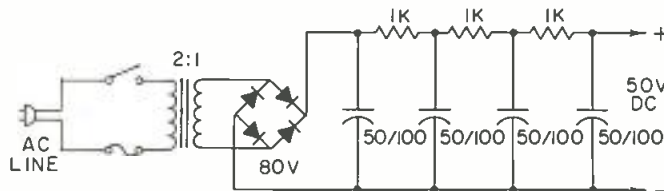

any imbalance in the powering system heads you for trouble.

Regulation of the power supply is not that important because most of the f.e.t. amplifiers are class A and do not interact one with the other—as some class AB do unless there are "stiff" power supplies involved and adequate decoupling between the amplifiers.

Voltages are not critical most of the time because they affect only voltage handling capability of the amplifier and not distortion, noise, or other parameters (within reason, of course).

The polarizing voltage affects gain of the capsule and some of its dynamic properties (electrical damping because of electrostatic attraction of the diaphragm to the plate).

Resistor valve in a power distribution system usually is a few thousand ohms, depending on the requirements of the f.e.t. preamp.

For many years Europeans have run condenser microphones without preamplifiers in the console similar to high-level inputs, but Americans have never adopted the European way of mixing. In order to make everyone happy why not add just a little more *umprf* in the mic f.e.t. preamp by adding one more stage (wouldn't cost much more and wouldn't draw much current either) so that mic could be plugged in directly into the high-level input. If one is afraid of overload characteristics of the preamplifier we can prevent overload of the first stage using the same f.e.t.s for limiting or compression. This way all the noise generating stages would be concentrated in the well-shielded enclosure of the microphone.

In conclusion I would like to write a few words about the operation of a condenser microphone. Most of you know how a microphone is constructed—very thin conductive Mylar (or similar material) diaphragm stretched close to a rigid metal plate with perforations to allow passage of a certain amount of air. Capacitance between the diaphragm and the plate is on the order of several tens of picofarads—sometimes as high as 100 picofarads. Polarizing voltage applied to the capsule maintains a charge on the capacitor formed by the diaphragm and the plate. From the basic formula

$$Q = VC \quad \text{where } Q \text{ is the charge in Coulombs}$$

$$V \text{ voltage in volts}$$

$$C \text{ capacity in Farads}$$

If we consider the charge to be constant and we vary  $C$ , voltage should vary also in order for the equation to hold true. This is how a condenser microphone operates. By varying  $C$  we vary  $V$  which is applied to the gate of the f.e.t. and amplified for further processing. Sound pressure, of course, is the factor which changes the position of the diaphragm with respect to the base plate—changing the capacitance of the capsule.

For an analogy, think of an inflated balloon. Air in it is a charge. Pressure exerted on the walls of the balloon is voltage, volume of the balloon is capacitance. Compressing the balloon without changing the amount of air inside of it will increase the pressure on the walls of the balloon. If you start sensing the variations in pressure you will be sensing the variations in pressure applied by hand to the balloon. ■

## Copies of db on Microfilm

Copies of all issues of *db*—The Sound Engineering Magazine starting with the November 1967 issue are now available on 35 mm. microfilm. For further information or to place your order please write directly to:

University Microfilm, Inc.  
300 North Zeeb Road  
Ann Arbor, Michigan 48106  
A subsidiary of Xerox Corporation

In addition to Microfilm Copies available through University Microfilm, we have a limited number of regular back issues available. You may order these copies at \$1.00 each from:

Circulation Department  
*db*—The Sound Engineering Magazine  
980 Old Country Road  
Plainview, New York 11803



**DON'T THINK OF US AS A CHARITY.**

**THINK OF US AS AN INVESTMENT.**

And a good one. Because we can guarantee a substantial return for your money. It pays off in more black college graduates, with more training in more areas.

What we need is operating capital. Money we can put to work supporting forty private, four-year colleges.

These schools educate a lot of promising young kids who'd never get to college on their own. Almost three-quarters need some kind of aid. Over half come from families earning less than \$5,000 a year.

With your help, we can help more.

A \$5,000 donation will give four students one year at an average UNCF college. With \$20,000 we can equip a business education course. \$100,000 will support an entire economics department.

Send a check to 55 East 52nd Street, New York, N.Y. 10022. We think it's one of the best investments you'll make all year. A deal?



**A MIND IS A TERRIBLE THING TO WASTE.**

**GIVE TO THE UNITED NEGRO COLLEGE FUND.**

advertising contributed for the public good



Audiometric-type transducers make our headphones better. Better than any headphone you've ever tried. You can hear the difference; clear, live, distortion-free sound. But even more important, performance and sound are the *same*, all day, every day. Because our audiometric-type elements are absolutely stable to give you consistent performance at all times.

Originally, we developed audiometric elements for clinical hearing tests and measurements. This required elements that remain totally stable even with changes in temperature or humidity. Sensitive elements that respond efficiently to variances in frequencies and power input. Elements capable of sound reproduction at over 130 dB sound pressure level with very low distortion and without burning up.

Now we've modified and adapted this audiometric transducer element to give you a series of thoroughly professional headphones. Headphones you can rely on for stable performance — day in, day out. Clear and undistorted so you can truly monitor sound quality and balance and not just signal presence.

We make two series of professional models to meet your needs Series 1325 for stereo monitoring and series 1320 for communications, with optional noise cancelling boom microphone. Try our better hear muffs at better dealers — or write for free information. You'll hear more from Telex. ®

PRODUCTS OF SOUND RESEARCH  
**TELEX**®  
COMMUNICATIONS DIVISION


9600 ALDRICH AVENUE SOUTH • MINNEAPOLIS, MINNESOTA 55420

CANADA: DOUBLE DIAMOND ELECTRONICS, LTD., Ontario  
EUROPE: ROYAL SOUND COMPANY, INC.,  
409 North Main Street, Freeport, N.Y. 11520 U.S.A.

Circle 13 on Reader Service Card

# NEW!


## PANNING AND SLIDERS ON A BUDGET

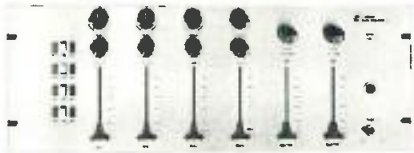

### EM-7S Four Input Stereo Echo Mixer

All features of our regular EM-7 Mixer plus slide pots, panning active mixing and IC circuitry. Duplicates all big board effects when used with ES-7 echo unit and PEQ-7 equalizer.

## FOUR CHANNEL ACTIVE PEAKING TYPE EQUALIZER

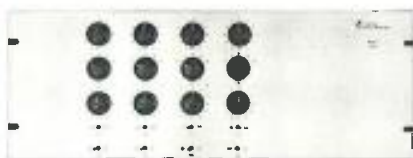

### PEQ-7 Four Channel Equalizer

Update your EM-7 system or use with new EM-7S Mixer. Five Hi freq. peaking type curves, 1.5, 3, 5, 10, and 20 kHz. Boost or cut in steps of 2, 4, 6, 9, or 12 dB. EQ in-out switch. Zero insertion loss.

## GATELY ELECTRONICS



57 WEST HILLCREST AVENUE  
HAVERTOWN, PENNA. 19083  
AREA CODE 215 • HI 6-1415  
...have you checked Gately lately?

John M. Woram

## THE SYNC TRACK

● NARAS—the National Academy of Recording Arts and Sciences—held another of its always welcome, but all too infrequent, meetings here in New York City one time ago. The meeting was called to discuss the precarious condition of the recording industry here in Fun City.

Although the meeting addressed itself to the particulars of New York life, I suspect the same meeting might have been held almost anywhere in the country.

No one needs to be told that a lot of recording work has left these shores [west or east coast, as you like] for studios in Europe. Still other work now gets done in American locations far from the traditional recording centers of New York, Hollywood, and Nashville.

And so—the NARAS get together at which representatives of NARAS, of the musicians and their union, the mayor's office, and the engineering profession (or cult, maybe?) sat down to discuss what's to be done.

A certain amount of decentralization must always be expected as an industry grows up and hopefully, expands. Because there are now studios in Muscle Shoals and Detroit, to say nothing of—for all I know—Council Bluffs, does not mean that New York (or your favorite city) is necessarily doomed. Nevertheless, the prophets of doom are at hand, and although

one hopes they are guilty of overstatement, there is at least some cause for concern. Otherwise there wouldn't have been a meeting, would there?

From the floor, there were several protests against companies that go to Europe to do their recording work. Many present were ready to suggest all sorts of penalties against those who would do such a thing. Very few were prepared to consider that maybe there was a rational reason for the exodus.

Successful individuals in any facet of recording are usually reasonably well paid. In short, their work is profitable. And yet, how many of us seem to be scandalized that a record company would seek to be profitable too. There seems to be a semi-religious conviction that companies should be honored to spend \$10,000 here, when they could do the same job elsewhere for much less.

The recording of classical music in this country has almost stopped completely. Whatever shall we do, everyone cries?

In a recent *New York Times*, there was a story about the then just finished recording session of *Carmen*. The budget was \$275,000! In order to break even, about 125,000 albums will have to be sold. I don't know what the odds are on this sort of sale, but if I were looking for a sure thing, I think I'd keep looking. On the other hand, Deutsche Grammophon, the

company doing the recording, has impressive worldwide distribution facilities. The global classical market accounts for 20 per cent of sales compared to 4 per cent here in the United States. Nevertheless, \$275,000 is a lot of money, and, the last time a complete major opera was recorded in this country was in 1965. That's a long time between sessions, if you're counting the days.

Not too long ago, a smaller classical album was also recorded in these parts. One night, the session ran half an hour overtime, for which the orchestra and chorus were paid the appropriate overtime rate. Just before the end of the half hour period, it was seen that a final take would be needed, but this would run a minute—more or less—into an additional overtime period. The union representative pointed out that there wasn't time to re-do the take. So, it wasn't done. To do so would have cost a small fortune. Not \$275,000 to be sure, but enough to even further lessen the very remote possibility that the session will eventually return at least a small profit.

In discussing this situation at the NARAS meeting, the union officials pointed out that their musicians had been unfairly treated in the past, and that they had to be on the lookout for any and all abuses of their rights. So, the union won another moral victory that night, and the producer will think twice before attempting another session in this country.

Let's face it—we all go to work to make money. Ideally, we can make our little bundle without exploiting others. There are, of course, those who will attempt all sorts of abuses if not carefully watched. However, anyone bright enough to make it in this industry should be able to distinguish unlawful exploitation from the mutual give-and-take of creative cooperation. Union justice cannot afford to be blind. Or at least not until people come here to record, rather than flee the country every time a big budget job comes up.

Of course, the musicians' unions are not the only ones standing in the way of progress. Consider the myopic vision of one of the prominent recording engineers' unions. Some time ago, during a visit to their office, I asked why they didn't get some IBM electric typewriters.

What an uproar! I really expected the ghost of Samuel Gompers to come haunt me. It seems that the IBM employees did not belong to a labor union, and so it would be unthinkable to touch anything they made. Again, the union leaders were in-

# hot tip



## The new Wahl, "ISO-TIP" cordless soldering iron – only \$19.95

- Compact and light weight – fits comfortably into the palm of your hand and snugly into your tool kit.
- Built in work light and on/off indicator.
- No leakage from AC power lines.
- Rechargeable nickel-cadmium battery – automatic recharging with exclusive "Charge Holder" stand.
- 60 solder connections on one charge.
- Operating heat in less than 5 seconds.
- Gets you into tight spots where conventional irons can't reach.
- No electromagnetic field generated during the heat cycle – the only safe way to perform IGFET and MOSFET work and perfect for all PC work with delicate components.
- No clumsy cord to get in your way.
- One full year guarantee.

This unique new soldering iron is a fantastic bargain at \$19.95. Ideal for PC board work, kit builders, radio, TV and recording studios, avionics and experimental R&D work. And of course in any field service requirement. At home, shop, factory, laboratory or field – the applications are endless. Order yours today from . . .

**audiotechniques, inc.**

### audiotechniques, inc.

142 hamilton ave., stamford, conn. 06902

Please send me \_\_\_\_\_ "ISO-TIP" soldering irons.  
I am enclosing \$19.95 plus \$1.00 for postage and  
handling for each. Total amount \$ \_\_\_\_\_


name \_\_\_\_\_

street \_\_\_\_\_


city \_\_\_\_\_

state \_\_\_\_\_

zip \_\_\_\_\_

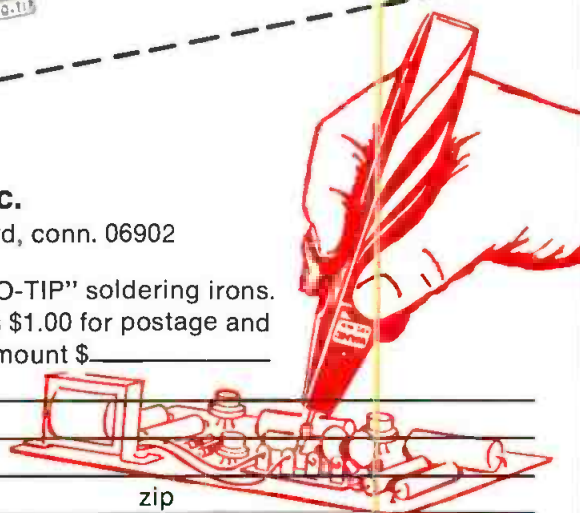

Include 7% sales tax if Connecticut resident.

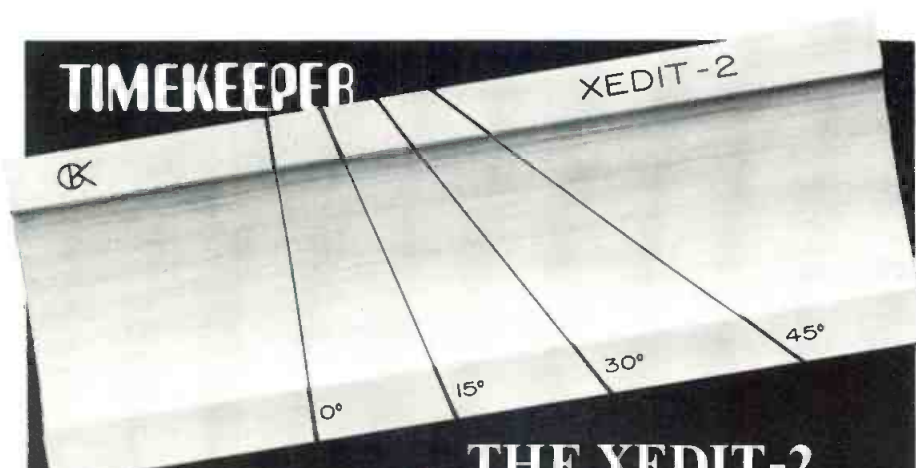

**TIMEKEEPER** XEDIT-2

0° 15° 30° 45°

**THE XEDIT-2**  
the finest 2" tape splicing block you can buy

- Small holding ridges will not crimp the tape when it is removed
- Razor blade fits snugly—makes a straight, neat cut
- Tough aluminum alloy with clear, anodized finish
- Custom-machined to extremely close tolerances
- Cork backing—no slippage
- 7" x 3" x 3/4"

Sold exclusively by TIMEKEEPER on a 100% money back guarantee. You must agree that this is the best 2" tape block you have used or you may return the unit for a full refund.

N.Y.S. residents add 6% sales tax **Price: \$80. postpaid**  
(45° cut is optional at \$5 additional)

**TIMEKEEPER** P.O. Box 835 Great Neck, N.Y. 11021

capable of discrimination.

There is certainly a point to boycotting grapes that were picked at starvation wages by migrant workers begging for support in their cause. There is *no* point to boycotting typewriters that were assembled by workers who are conspicuously well off without a union. (Other than sour grapes, of course.)

Now that that little editorial is over, the same union insists on two union employees on every recording session even if it is a single voice, doing a mono narration. And on the other side of the coin, if one of these union men should persuade an important client to do a lot of expensive recording in the studio, management will pay him not a penny more than if he spends his time copying tapes.


On yet another front, I recently heard one of New York's best recording engineers describe his adventures in attempting a remote session in one of Fun City's prestigious(?) convention centers. The squabbling between rival unions over who had "jurisdiction" over what, all but destroyed the session. Months later, when a similar event came up, the recording was done without a hitch—but a long, long way from New York City.

Usually when these little situations turn up, everyone pretends to be somewhere else at the time, and figures that if the condition is ignored long enough, it will go away. And to discuss these things in public has been almost akin to blasphemy.

It must also be said that it is pointless to think about penalties against those who would work abroad. Trying to save money is not a crime. Our standard of living makes it inevitable for certain things to be less expensive abroad. (Of course, the Administration is doing everything it can to take care of that, but we must give it time.) In the meantime, we might all try a little harder in those areas not directly related to the dollar sign. Like service, cooperation, creativity, and so on. Once people *want* to record in New York, or California (or wherever) half the battle is won. Going to Europe, or for that matter across the country, to do a recording session is *not* a pleasure trip. The producer is miles away from his office, living out of a suitcase, trying to adjust his solar clock and digestive tract, while coping with an involved session on unfamiliar turf. Certainly he would be glad to pay a reasonable amount more for the luxury of saving those long plane rides for vacation time.

So, if I may be permitted to offer

## The Super Parametric Equalizer

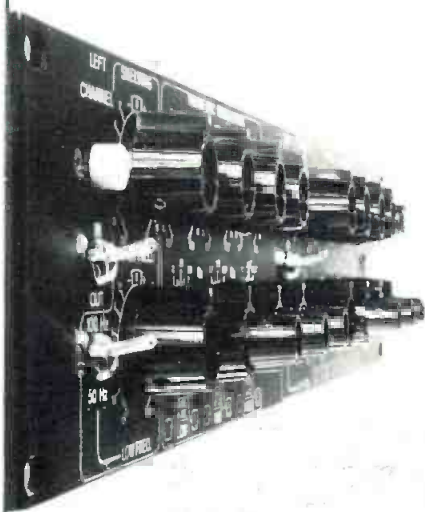

Of the many Equalizers available today, the ITI ME-230 Parametric Equalizer is the only one that offers you all these truly outstanding recording features—

- **All controls are continuously variable.** No more working with arbitrarily fixed positions. With the ITI Parametric Equalizer—you record using your mind and ears, with your hands only transmitting the orders of what you hear.
- **Remarkable frequency range.** 10-800 Hz, 100-8,000 Hz, and 400-25,600 Hz, each accurately calibrated, with boost or cut up to 12db about any center frequency.
- **Continuously variable Selectivity or "Q".** From 4 to 14dB/octave with no effect on the absolute magnitude of the center frequency.
- **No inductors used**—In the Parametric sections. Ringing on transients is virtually non-existent.

The ME-230 Parametric Equalizer—our Super Equalizer—is for all those who want more than "just good enough" sound recording. We invite you to call or write for more details about its high degree of flexibility and superb performance.



**INTERNATIONAL TELECOMM, INC.**

McCormick Road and Schilling Circle  
Hunt Valley, Maryland 21031  
Telephone: 301/666-7770

a little free advice; whoever you are, if you find someone who is trying to do a job in your home town, don't drive him away. The industry you save may be your own.

The NARAS meeting hasn't yet produced any dramatic results. But at least people are beginning to face the fact that all may not be well with the recording industry. There must be more meetings of this nature, and once everyone gets over bitching about how *they*—meaning everyone else—are ruining the business, maybe we can get down to some constructive work. A "well done" to NARAS for at least getting us out in the open to talk.

On another "cheery" note—the past Audio Engineering Society convention in New York City saw an impressive amount of very inexpensive recording equipment being shown, in addition to the regular top of the line (and top of the budget) stuff.

The Tascam exhibit alone produced more ulcers than a Gelusil executive dares dream of.

With recording costs being what they are, it is inevitable that even more artists will attempt to save money by doing their recording work outside the pro studio. Although there is certainly a limit to how far one can go without the facility of a fully equipped studio, there is little doubt that at least some work can be satisfactorily produced without a multi-thousand dollar installation.

Many amateur recordists may decide to try their hand at full-time operation. Although even more studios are not exactly what industry insiders are praying for at the moment, we may as well face up to the fact that it's going to happen. As usual, it won't be as bad as the pessimists would have you believe.

With a full line of budget equipment available, studio operators are going to find even more reason to put pressure on manufacturers to keep costs within reason. The pro studio man is going to think long and hard about buying some new kilo-buck whatchamacalit, and the recently formed National Council of Recording Engineers (see the SYNC-TRACK—October 1972) may find itself with a lot of very interested members.

To wrap all this rambling together—new budget equipment may help jolt the industry into giving some serious thought to just how far to go with planned obsolescence, and fancy price tags. The precarious condition of the recording scene, in New York at least, is finally getting some long overdue attention. Perhaps we shall see some changes made. And in the long run, we may all benefit, readers and advertisers alike. ■

# It's the state of your art!



Delivered to:  
Jack Clement Recording  
Ken Nordine Recording  
Neil Young Studios

Compumix and the new Quad/Eight feature film scoring console at The Burbank Studios.

## Compumix: a fully compatible Automated Mixdown system.

"Automation Arithmetic" — A discussion of the technical parameters of Compumix and automated mixing. Check our number for your free copy and a Happy New Year!

**quad/eight  
electronics**

11929 Vose Street, North Hollywood, California 91605  
Telephone: 213/768-1516

Circle 24 on Reader Service Card

**NO SALES PITCH  
...JUST FACTS**

from

**FAIRCHILD/ROBINS**

the audio specialists



You've seen a whole series of FAIRCHILD/ROBINS engineering data sheets here in db Magazine for the past year: No soft sell . . . no hard sell . . . just facts to help you solve your audio problems, economically. Standard consoles, channel modules, custom building blocks, or complete systems, Fairchild/Robins' engineering data sheets give you the whole, innovative story. For special information, or for the whole set of data sheets for handy reference, write or phone George Alexandrovich, vice president.

**FAIRCHILD/ROBINS**

FAIRCHILD SOUND EQUIPMENT CORP.  
A ROBINS INDUSTRIES CORPORATION  
75 AUSTIN BLVD., COMMACK, N.Y. 11725  
CABLE: ROBINSOVERSEAS COMMACKNY  
(516) 543-5200

Norman H. Crowhurst

## THEORY AND PRACTICE

### T & P in Educational Audio/Visuals

● The column that appeared in the July issue, about giving help to hide-bound educators in optimizing the use of media, produced good responses from a number of readers. And since I wrote that piece, I have gathered some more experience in the subject.

Everyone agrees that something should be done to improve education. The problem that confronts us all seems to be "how?" Having an engineer's background, my approach is to analyze the problem(s), then devise solutions to them. Pardon me, if that sounds deceptively easy, because I know from experience that it is not as easy as it sounds!

Difficulties arise from a variety of superficial reasons. Dig a little deeper, and you will find they arise *because* educators look to "funding" to achieve whatever changes they hope for. In one sense, nowhere is the saying more true, "He who pays the piper calls the tune." In another sense, it is not quite as true as it ought to be!

In the final analysis, the American taxpayer pays the piper, but he certainly does not call the tune! The funding agency, in this case most

often the United States Office of Education, is the immediate piper payer. But, in a superficial endeavor to "protect taxpayer interests, the Office of Education puts in all kinds of rules that, in theory, insure that the taxpayers' money buys useful work, rather than lining somebody's pockets.

It is in the *application* of these rules that theory *really* departs from practice. Let me recount a recent example. We developed this math analysis course, using tape/slide presentation, with pulsed coupling from the audio tape to automatically advance the slide projector. This was an experimental model of the course, to be pilot tested, as required by Office of Education rules, in a number of schools, before deciding that the course is ready for production.

Speaking personally, I would welcome all this testing, because it would give opportunity for feedback, based on how students respond, to improve the ultimate course material. The fact that testing costs more than developing the material is presumably okay, since government funds are footing the bill. But to give the taxpayers

value for money, shouldn't we use the testing to make sure that the ultimate course is the best possible we can make it?

The reason for using slide/tape as the experimental medium was that it is versatile to modify. When the course goes into production, it would be easy to transcribe into any other medium that uses a similar combination of audio and visual presentation. That could be decided later. Right now, we wanted to develop the best possible audio/visual presentation for inducing learning.

But then came the kicker. With the apparent intent of protecting taxpayers' money, another regulation of the Office of Education restricts transfer of funds between budget line items. The planners of this program (who planned it before I was retained) did not foresee that they might want to purchase a few slide projectors and tape recorders to issue to schools participating in the test, for less than \$200 a set.

They had not overlooked possible need, just *this* possible need! The budget contained plenty to cover evaluation, but it was specified for evaluation, not for equipment with which to evaluate! So Office of Education regu-

lations require that the money not be transferred in that way. The materials (software) must be converted to something that schools can try out using equipment *they already have*.

So the whole thing must be rushed, with no time in which to do it, into a different form—tape/filmstrip, with beeps on the tape that cue the student when to advance the filmstrip himself. In such a rush, with a now impossible deadline to meet, slides were rushed to filmstrip copiers, tapes were dubbed, sometimes by inserting spaces into which beeps were put, sometimes by just dubbing the beeps over the audio.

This week I visited a school where this hurriedly (working the clock round for a couple of weeks) remade material is being tested. It is almost impossible for the student to view the presentation as the design intended. For example, he misses beeps, because they are 'buried' in the audio, or else sentences don't make sense, because of unduly long pauses that had to be inserted in illogical places, and so forth.

Even so, students are grappling with it and love the idea. Degraded this much, it still helps them learn math as previous materials did not.

Just think what it could have done!

In the evaluation, where students are asked for their reactions, between 90 and 95 per cent of their responses relate to things like, "It would be better if the filmstrip stayed in sync with the audio script," or "we had trouble following this point, and had to play it several times before we got the right pictures to fit with the words that related to them."

Bear in mind that all this happened, at a cost, for producing these badly-done rushes, far higher than that of the few projector and tape sets that would have been needed, as a result of regulations ostensibly intended to save the taxpayers' money.

That is a heavy criticism. If I were to suggest that the personnel should have foreseen this specific contingency and included an item for the needed equipment in the budget, I would be unrealistic. When the project was planned, the exact form in which the experimental program would be issued for pilot test was not known. They had put plenty in the budget for pilot testing.

But when testing time came, they were not allowed to use the material as it should have been used, because of Office of Education regulations,

Gotham distributes more than 500 products including:

STUDER studio consoles  
 NEUMANN quad microphones  
 STELLAVOX mixers  
 WOELKE wave analyzers  
 K + H loudspeakers  
 LYREC tape timers  
 EMT Reverb units  
 GOTHAM digital delay systems  
 EMT compressors  
 DANNER linear attenuators  
 EMT turntables  
 NEUMANN microphones  
 DANNER rotary attenuators  
 WOELKE flutter meters  
 STELLAVOX tape recorders  
 NEUMANN disk cutting systems  
 K + H equalizers  
 EMT polarity testers  
 STUDER tape recorders  
 M + W light beam meters

## The EMT 140 is the biggest name in reverberation. Now meet the smallest name in reverberation.

The Reverb Foil EMT 240.


It's bound to be a resounding success, because it's only 1/5 the size of its big brother.

But, small as it is, the EMT 240 represents a big advance.

An electrolytically produced foil of almost pure gold, 12 inches square and 0.7 mils thick (!), replaces the steel plate used in the 140. Which assures less coloration, as a result of significantly increased resonance density.

The EMT 240 is not affected by high ambient noise levels or mechanical shock. This means you can install it in studio or control room, or take it with you on location. The remote reverb time control is standard equipment. And the 240 is delivered to you sealed, pre-aligned, pre-tensioned, ready to go to work.

The coupon will bring you more information. Mail it today.

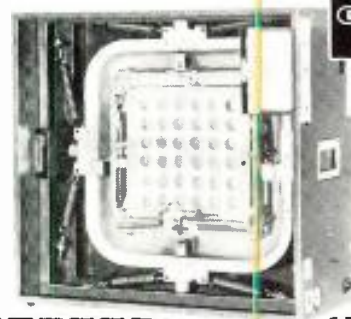

Staple this coupon to your company letterhead, and mail to our New York office.

**GOTHAM**  
 AUDIO CORPORATION

Headquarters: 2 West 46th Street  
 New York, N Y 10036 (Tel: 212-265-4111)

West Coast Sales Office: 1710 N. La Brea Ave.  
 Hollywood, CA 90046 (Tel: 213-874-4444)

I'd like a no-obligation introduction to the EMT 140's little brother, EMT 240. Please send me literature and price information.

NAME \_\_\_\_\_  
 TITLE \_\_\_\_\_

Circle 17 on Reader Service Card

## CAREER WITH JBL

James B. Lansing Sound Inc. is accepting applications for the position of National Sales Manager, Professional Equipment Division comprising sophisticated transducers and electronic products.

Responsibility includes direction of regional sales managers and territorial representatives serving sound contractors, distributors of recording studio equipment and OEM accounts. Participation in marketing plans and product development.

This senior manager seasoned in providing leadership with demonstrable credentials may submit resume to:

I. R. Stern, Executive Vice President  
James B. Lansing Sound, Inc.  
3249 Casitas Avenue  
Los Angeles, California 90039  
(213) 665-4101

ostensibly intended to save money, but which actually caused the expenditure of more money, and resulted in a much inferior test, because the kind of feedback we really need is likely to be obscured in comments about many problems encountered by students that need not have been.

Perhaps we should Dolby-ize the U.S. Office of Education! But this is not unique. Regulations of government agencies, intended to protect expenditure of public funds, invariably have the reverse effect. I could quote scores of examples, but here's a typical one.

On the project at Teaching Research where I worked for 15 months, government funded, our secretarial staff used about a dozen IBM Selectric typewriters, which the agency hired at \$30 a month each from IBM. Toward the end of my work, I borrowed one of these to type my reports directly, because I found that quicker and more accurate than writing the stuff out longhand to have a typist transcribe it. My handwriting is not the most legible!

When I left the agency, I wanted to take over the rental of this IBM typewriter to continue work on my own. I called IBM, who made the transfer and sent a man round for me to sign

up my contract. Now I learned that I could rent this Selectric 1 for \$30 a month, on a month-by-month basis or, if I committed myself to a minimum of 6 months, for \$25 a month.

Then I remembered hearing about the Selectric 2, which is a far more versatile typewriter, so I asked about the relative cost. The man told me I could *buy* this better typewriter, on a 2-year contract, for only \$24 a month. You know what I did! That is possible for me, without asking anybody, because it's *my* money.

But government agencies have their rules. They are not allowed to make that much more economic choice. During that one project, they must have paid out thousands of dollars in rentals that could have been saved, and paved the way for future saving, by avoiding the need for such rentals on future projects. However it seems that such saving would be a prohibited "waste" of taxpayers' money.

To an individual, or a private company, that kind of saving is only common sense, but not to a government agency.

As I see it, the only way to get out of this kind of bind which, as well as crippling efforts to produce effective work, is wasting many times as much of the taxpayers' money, is for private companies or individuals to undertake such work on a contract basis, instead of looking for funding. That is not easy to do, because the Office of Education people want to fund things, so they retain *control*—if you can dignify such misuse by that word—of the operation, at this high cost to the taxpayer.

How can we make that change? The schools belong to the people. Having the middle man—the U.S. Office of Education, between the people as taxpayers and the people as recipients of education via the schools—is what squanders the money. The solution is another example of "eliminating the middle man!"

For some months now I have been working on this angle, with considerable success. That could make a whole report in itself. My main reason for doing it is to improve efficiency in achieving results, by avoiding their being sidetracked by such stupidities. But as this kind of thing happens more, it will also move toward getting big government whittled down a bit.

In my case at least, this demonstrates the truth of a scientific principle: "Every action is accompanied by an equal and opposite reaction!" In mechanics and physical things, that is immediate. In human affairs, as suggested by the Declaration of Independence, it takes a little time. ■

**Soundcraftsmen** presents the new **RP10-12**  
**PROFESSIONAL EQUALIZER for RECORDING and PLAYBACK**  
PERFECT tailoring of octave-wide bands... Infinitely variable adjustment flexibility  
Special Effects programming ... Instant re-setting ... **\$349.50** includes walnut-grain cabinet, or rack-mount.

**Recording Studios • Audiophiles • Night Clubs • Performers • Theatres**  
**Churches • Gyms • Auditoriums • Hi-Speed Duplicating • Musical Groups**

**SPECIFICATIONS**  
FREQUENCY RESPONSE:  $\pm 1$  dB from 20-20,000 Hz, 1dB down @ 10KHz, 1/2 dB down @ 100 KHz.  
HARMONIC DISTORTION: Less than .08% @ 2V, .05% @ 1V, Typ: .01% @ 1V.  
THD DISTORTION: Less than .08% @ 2V, .05% @ 1V, Typ: .01% @ 1V.  
SIGNAL-TO-NOISE RATIO: Better than 90 dB below 2V output, Typ: 95 dB.  
INPUT IMPEDANCE: 100K ohms — (Operable from any source up to 100K ohms: any Mixer, Hi-Fi Preamp, Receiver or Tape Recorder).  
OUTPUT IMPEDANCE: 600 ohms — (Operable into any Mixer, Hi-Fi Amp, Receiver or Tape Recorder).  
INSERTION LOSS: Zero (slide controls centered, and "OUTPUT ADJUST" control set so that "input" equals "output").  
MAXIMUM OUTPUT: 7 V in to hi-impedance, 3.5 V into 600 ohms — (13 dBm).

**SPECIAL FEATURES**  
VU METER: Precision  $\pm 5\%$  meter movement provides an accurate visual display, to enable exact unity-gain input-output matching.  
INDUCTORS: Toroidal and Shielded ferrite-core.  
CIRCUIT BOARDS: Military grade G-10 glass epoxy.  
RESISTORS: Low-noise selected carbon-film throughout.  
SWITCH CONTACTS: Gold-plated to assure low noise and reliability.  
DEFEAT SWITCH: Electrically removes the Equalizer from the circuit.  
OUTPUT ADJUST: Controls a continuously variable 18 dB range, from -12 dB to +6 dB, to match output to input.  
RANGE: 12 dB boost and 12 dB cut, each octave centered at 30, 60, 120, 240, 480, 960, 1920, 3840, 7680 and 15,360 Hz.  
SIZE: Walnut grained wood case 5 1/4" x 18" x 11". Rack-panel 5 1/4" x 12".

ALSO AVAILABLE, the **STEREO 20-12-600**.. **\$349.50** includes walnut-grain cabinet, or rack-mount.

Soundcraftsmen: 1310 E. Wakeham Ave., Santa Ana, Cal. 92705 Ph: 714-836-8375

Circle 14 on Reader Service Card



MARSHALL KING

# The Business of Hearing, part 2

*In this second and concluding chapter, the author brings the concepts of the first part into the reality of the audio control room. What we are doing to our hearing is bleak, but not beyond redemption.*

ONE OF THE QUESTIONS heard most often in an audio booth is: "Why do you monitor your work so loud when the final result in the home is monitored at living-room level?" It's a good question, for it is true that music sounds different at different volumes. In a moment we'll look at the damage done to our ears by being exposed to loudness, but first, why *do* we keep raising the control room speakers up to strident levels? The reasons are several.

In television, the mixer is obliged to monitor many sources of sound. I mentioned in an earlier article (*db*, July, 1969) that he cannot enjoy the luxury of listening only to the program monitor speaker. There are, as well, speakers and intercoms from the director, the stage manager, from video tape, the second audio man (A-2), the boom operator and other sources. The result is that, instead of turning *down* the level of these speakers in order to hear the one of the most momentary importance, he gradually turns *up* one after another, as their messages demand his attention. Over a period of several hours this can be a vectorial disaster.

Again, whenever the mixer wants to concentrate on a particular, he usually turns up the monitor to analyze it. It's much like the t.v. camera lens that zooms in to show an expression. What we often forget to do is to zoom out again after our investigation is through; that is, turn the speaker back down. The trouble is, after doing this a dozen times or so, the mixer is probably suffering from some amount of hearing fatigue whether he knows it or

not, and the speaker volume stays at the upper level. Like any of the other senses, hearing does take a beating with prolonged exposure and becomes less responsive to stimuli. It's much like our accusing the bartender of watering down our drinks after the first one tasted so good. It takes more and more to get the same effect. Too often we monitor our work at dangerously high levels, and this leads to an occupational hazard that warrants our serious attention: hearing loss, either temporary or permanent.

Before looking closely at this dilemma, let me say that it isn't too difficult these days to find expert opinion on any subject, audio included, but I learned long ago that an expert is an ordinary man a long way from home, just as a specialist is one who knows more and more about less and less. Anything can be proved with the right set of statistics,<sup>1</sup> so rather than depend entirely on official reports, or solely on our own observations picked up along the way, it might be worthwhile to measure the findings of researchers against what we find in daily practice, and perhaps come up with a significant idea as to where we are headed in the business of hearing. Some items:

<sup>1</sup> For example, it's a fact that when I say "Fetch" my dog will bring in the newspaper. It's also a fact that when I say "Fetch" after cutting off his legs he will not bring in the newspaper. It is thus proved that cutting off a dog's legs will make him deaf.

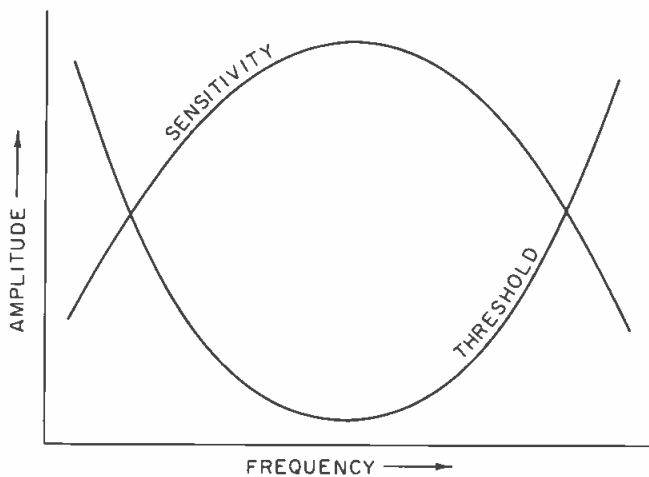


Figure 1. The general relationship between hearing sensitivity and hearing threshold. The threshold curve represents the relative loudness which a sound must have at any frequency in order to be perceived. The shape of this curve is a mirror (and a result) of the shape of the sensitivity curve, which shows how normal hearing falls off at very low and very high frequencies.

- On June 9, 1971, our news broadcasts quoted the International Standards Organization (ISO) as saying that "urban noise is increasing at the rate of 1 decibel per year." From this we can see that, since general traffic noise is considered to be 85 dB, and since damage to hearing is thought to begin at around 120 dB, the general outdoor background noise will, in thirty five years, be the same as if we were standing directly in front of the stage at a rock concert.

- In the same radio report the ISO suggests that, in view of the louder and more traumatic sirens being used by the New York Police Department, efforts should be made to soften the nature of the sound. We can only wonder if this is a remedy at all, for it must be obvious that even the sound of a marshmallow being squeezed will be traumatic if it is amplified to a level of 120 dB.

- Quoted in *The National Observer*, Stanford Medical Center audiologist Donald A. Belt says, "The onset of permanent hearing loss from noise exposure is usually insidious and deceptive. There is no pain, no bleeding. A person may have a feeling of temporary hearing loss, some ringing in his ears, and then the symptoms seem to disappear. But the hearing does not completely recover." It is of interest to us here that Belt was speaking mainly of outside noises. The damage which comes from indoor, or more concentrated sounds which audio personnel must work with, is certain to be greater.

We should note here that when a degree of loudness is referred to by hearing specialists, their reference point of 0 dB is usually taken to be the lowest sound which healthy ears can hear. This is in contrast to the 1 mW reference for 0 dB used in audio transmission work. The difference is unimportant; in both cases a 10 dB increase in sound level means a tenfold increase in power. In the discussion of loudness or hearing damage, it is also relevant to note the distance of the ear from the source of sound. An amplifier which puts out an audio level of 30 dB will not make a loudspeaker deliver much volume to a listener five feet away. But if that 30 dB is fed into a headset worn squarely over the listener's ears, the perceived volume can be as painful and damaging as the 140 dB roar of a jet plane one hundred feet down the runway.

*Time* magazine (Aug. 8, 1968) lists the following chart as a general guide for the way audiologists rate sound levels:

- 0 dB The smallest sound man can hear.
- 60 dB Ordinary conversation.
- 70 dB Fortissimo singer, three feet away.
- 85 dB City traffic, as heard from inside a moving car.
- 95 dB Subway train, as heard from inside.
- 100 dB Noisy kitchen.
- 107 dB A power lawn mower.
- 120 dB Amplified rock music, six feet from the amplifier speakers.
- 130 dB A pneumatic riveter.
- 140 dB Jet aircraft, 100 feet away.

On the above scale it is likely that most of us run our control room speakers from 95 to 105 dB. Now we have something to talk about. *Time* goes on to say: "From industrial and military experience, the experts set certain standards for safety. Any prolonged exposure to a noise level above 85 dB will eventually result in a loss of hearing acuity for sounds in the frequency range most important for understanding human speech. This range is roughly from 256 cycles per second, the pitch of middle C, to about 2,000 c.p.s., or the C three octaves higher. Acuity is impaired even earlier for the higher pitches, such as violin overtones."

With regard to tests on teen-age ears which had been exposed to rock amplifiers wherein the sound intensity was 108 dB in the middle of the dance floor and 120 dB directly in front of the band, *Time* continued: "The greatest damage was in the high-frequency speech range, involving consonantal sounds, similar to the loss felt by oldsters who complain that "everybody mumbles nowadays."

As to why the trend has gone toward volumes exceeding 100 dB is a curious phenomenon in itself. Sound levels in general are up throughout the world. Restaurant managers seem not to care that their bus boys literally toss dishes into their portable carts a few feet from the patrons' ears. Gardening equipment is almost sadistic in the torture it bestows on anyone within a thousand yards, particularly those hungry pulverizers that feed on tree branches tossed into their gullet by indifferent yard workers. The horror of sound emanating from a jet airport is too prosaic to warrant comment here, as is the explosive nerve-jangling racket from any of the motorcycles on the market today. Otherwise fine restaurants have succumbed to the belief that even exquisite dining must be accompanied by the excruciating sounds of an unknown guitar player who owns a lot of equipment. It's as though laws have been passed to preclude any possibility of normal conversation.

The absurd levels of sound put forth by rock and other musical groups is known by now to most everyone. Wally Heider, who had just returned from recording a well-known group in Detroit, told me that he was obliged to put an Altec A-7 speaker, driven to its capacity, directly over the drummer's head, so he could hear himself play. The only thing fed to that speaker were the drums. I was incredulous, and when I asked if such a move didn't cause tremendous feedback, Heider merely grinned and said, "We'll never know."

It has been suggested that one reason they play so loud is so the customers can't possibly think of anything else and will give them their undivided attention. While this thinking may represent new highs in insecurity, it does nothing but alienate many people who still feel that if

music has value they'll listen voluntarily. And it may be true that, just as a loud p.a. doesn't make a comedian's jokes funny, loud guitar amps do not good music make!

Another reason put forth for today's barrier-cracking volumes is that, since the Establishment has left today's youth with a feeling of emptiness, loud musical messages are the only answer. There's no denying that Nature abhors a vacuum, but for that matter so do a lot of people, but they're careful what they fill it with, and how much.

Still, as audio technicians we can't avoid the exposure. A couple of years ago my company televised the Chambers Brothers as they appeared in concert at the Whiskey-A-Go-Go on Sunset Strip. Mixing outside in the truck, I could run the monitor at my own comfortable level, but inside, the cameramen had to wear jet airport headsets over their regular small earphones so they could hear the director calling his shots. Even so, they did not hear a word from the director, and very little else from the rest of the world for about two days.

### A SPECIAL BRAND OF PLUGS

The chief engineer of a prominent recording studio here in Hollywood asked me to not quote him by name when he told me: "Whenever I have to set mics or check sound levels throughout the house on a remote set-up, I wear my own special brand of earplugs. They're filters from cigarettes!" He went on to say that wearing earplugs is not uncommon. "A lot of performers do it, and they're smart. 120 decibels is not an unusual level of sound directly in front of a rock band." Do those musicians lose their hearing in time? "Personally, I have no doubt that many of them have lost some of their hearing," he said, "but it doesn't affect their playing. They *know* what the music should sound like, and they *know* what to do with their voices and their instruments to make it sound that way.

Even more amazing were his opinions about the continuing ability of mixers who have suffered some hearing damage. "I can tell you for a fact that there are top-notch mixers working in this town whose ears have taken such a pounding that they can't hear much over eight thousand and very little under a hundred. Yet, they do consistently good work. Why? I guess it's just like those musicians. They know what it should sound like, and because of having done it so much, they know what to do to make it sound that way. It's some kind of osmosis, I guess, but believe me, they *know* when it's right and when it's not."

This was interesting. It must be very much like the blind person who moves about as a person who can see. All his other faculties seem to be called upon to fill in where his eyes have failed. Perhaps this could account for some mixers with damaged hearing being able to perform well. While this may not be a dramatic display of high-speed evolution, it certainly is a remarkable example of how ersatz faculties can be developed on-the-spot and made to render up a psycho-socio-acoustic interpolation of the real thing.

### WHAT'S HAPPENING

Apparently, the days when moderate sound prevailed in the control room died with radio. Now, the excruciating volumes of p.a. systems and rock amplifiers are invading the booth, where a new breed of cat who seems to come with the performers is prodding us to bring up our levels. What this is doing to our ears I discussed with Dr. Roy Griffiths, Associate Professor of Psychology at the California State University at Northridge.

"We now find that hearing is more than what meets the ear," he said. "That's what the kids who go to rock concerts are trying to tell us. You feel it in the pit of your



Figure 2. Sophisticated audiometric equipment is being used by Dr. Roy Griffiths, Associate Professor of Psychology at CSU in Northridge, California.

stomach. This is part of the new musical experience. I have a hi fi system at home with 18-inch speakers so that when the organ is playing its almighty most I feel, acoustically, the music through the soles of my feet. And that's a great experience. But when you turn the volume down to a "home" listening level, maybe only 90 dB, which is really quite loud . . . you wouldn't hear the full organ in a month of Sundays . . ."

Dr. Griffiths described the unit of measure used by audiologists and others to gauge the ear's ability to do its work. This is the Temporary Threshold Shift (TTS), a measure of the ear's capacity to shift its sensitivity to sound in order to accommodate a wide range in volume, just as the resistor-multipliers in a voltmeter can shift its sensitivity to accommodate a wide range of voltages.

For example, a healthy ear in a rested condition can hear sounds of a very low magnitude—say, 5 dB—but after being exposed to a rock concert it may be that the lowest volume it can hear is, say, 40 dB. In other words, it has suffered a shift in threshold of 35 dB. With an adequate amount of rest, the hearing threshold of a normal ear will return to its previous sensitivity, so that we may picture the ear's threshold of hearing as a constantly falling thing, constantly falling toward its normal minimum, until another loud sound brings it up again. Theoretically, in the absence of sound, it stays at this minimum (5 dB in the above example). It is the ear's ability to *return* to this minimum, after exposure to loud sounds, that is one measure of its health.

This protective device in the ear is analogous to the iris of the eye. Walking from bright sunshine into a darkened room renders us nearly blind for a short time, until our iris opens up to a new low level of sensitivity. It is only then that we begin to see objects in the room. It is the same with hearing. During exposure to loud sounds, the "iris" of our ear closes down a bit to protect the hearing nerves leading to the brain, so that when we move back into an area of low level sound we are apt to be nearly deaf for a short time, until our ear's "iris" (the threshold of hearing) shifts to a lower level of sensitivity. As stated, if it does not make this shift, we may have suffered a serious, if not permanent, hearing loss. And this creeping deafness, which for a decade or more has been the private concern of jet airport mechanics, rock devotees, tree-topping technicians, and Yamaha riders, finally has a firm foothold in most every audio booth in the world.

Incidentally, measuring our own TTS is something most mixers do whether they're aware of it or not. At the beginning of each working day we usually have to turn *down* our monitor pot setting from where it was left at the end of the preceding day. As already mentioned, we often find it hard to believe that we could have been listening at such a loud volume the night before. Yet, before the new day is over, we will probably have inched it up, a decibel at a time, to the high mark again. This is a measure of our threshold shift between the beginning and end of a workday. No hardcore statistics have come to us showing what degree of shift represents real damage, but some researchers have gone on record to say that noise exposure may be serious and the damage permanent if the shift is 40 dB or more, *or* if the ears are re-exposed while still fatigued (db, June 1970, p. 28). For a rough idea of where you stand, you can calibrate your monitor pot and run your own tests.

Before going on to the subject of hearing loss, Dr. Griffiths had another word about the trend toward excessive volumes. "Your hearing threshold at both the very low and very high end of the spectrum is very high (see FIGURE 1). They're beginning to find if they can jack the volume of playback up high enough, we can hear in the so-called ultra-sonic range. But most transducers which we have, such as those used in your professional studios, don't produce past twenty thousand cycles because existing data shows that that's the limit of our frequency range. But there's a lot of meaningful information that we don't repeat, process, or amplify for usage, but which exists in reality. We now find that trucks that rumble along the freeways put out a prodigious amount of energy at five cycles or less, and we haven't a bit of data to indicate how deleterious this is. Yet, certain recent occurrences have caused us to start paying more attention to these so-called "extreme" frequencies. Take the heavy earthquake we experienced on February 9 of last year. One of the things we all noticed was the strange behavior of our animals. Cats don't normally leave home, but the low rumble of the earthquake caused them to run away, go berserk, or go into detrimental hiding. Certainly those low frequencies of the earthquake affect our nervous systems if not our hearing. I suspect that the animals didn't get the alarm through their ears but through the pads of their feet."

### PERMANENT DAMAGE?

While it may be true that gargantuan playback levels may allow us to hear funky sounds we may have heretofore missed, another glance at FIGURE 1 shows us what we can expect to happen if we jack up those volumes to accommodate our insensitivity to the extremes of the spectrum. Obviously everything goes up together, so while the extremes are brought up to where we can hear them, the center section of the spectrum is goosed up beyond the threshold of pain. And of course, that's where the trouble starts. It is those day-to-day useful frequencies that are the first to be wiped out in the creation of our creeping hearing loss. It makes us wonder if the ultimate fate of hard rock fans is to fall in love with five hertz and twenty thousand hertz at the expense of being unable to extract a useful message from anything in between. We'll know this has finally happened when sign language replaces drivers' ed in our public schools.

Of more importance to us is the question: is the pound-our ears take in the control room causing permanent damage or merely a day-to-day shift in threshold? Dr. Griffiths says, "As far as I know, the restoration is complete, if we're talking about fatigue from volume. However, if we mean prolonged exposure to dangerous sound

levels without reasonable periods for rest, that's another matter. Only professional hearing tests will tell you where you are.

"The kind of sound, or noise, which can most easily render unrecoverable damage to the hearing is the type represented by downtown traffic, which has three deleterious elements going for it. It is broad band, it is of high level, and it's of long duration. It is the combination of these three that causes the surest damage.

"It is possible to lose only part of our hearing, even temporarily. I can put a short, husky blast of 1,000 cycles into your ear which will render you deaf to a much lower level of 1,000 cycles, for a period of time that it takes your threshold of hearing to fall back to normal. During this time, however, your ability to hear frequencies other than 1,000 cycles has not been impaired. It's like disengaging only one key on the piano. Again, your ability to hear a low-level 1,000 cycle tone will come back in time, unless permanent damage at that frequency has been inflicted due to excessive volume."

### TRAINING HELPS

Now for the good news. If we in the audio field have escaped serious damage from sounds that are broad band, high level and of long duration, Dr. Griffiths feels we may have better hearing than most. "I would say that with persons in your field, because of so many years of critical listening, your hearing may be superior simply because *we* merely have been hearing while *you* have been listening. While I have no data to support this, my own observations have convinced me that people in our environment who seem to hear everything are the ones who have trained themselves to listen. You go to the Philharmonic, and if you don't know the work you don't hear the music. You know the old saying "If you don't use it you lose it"? There's something to that. A withering from dis-use. Don't forget, just because someone chooses to sit in silence in order to protect his hearing doesn't mean he's going to have that sharp ear ten years later. You can't save it for old age. The more you use it the better, but by *more* I don't mean *loud*. The secret is application. I would say that the work you are in, listening critically to music, provides the optimum input pattern for hearing longevity."

All right, we work in the field of audio and are exposed to prodigious volumes of sound, so what do we do? From the foregoing we can see that common sense will probably keep us out of trouble, although sometimes we proceed as though we've forgotten it. We've heard of the concert pianist who would never expose his hands to the hazards of handball and the opera singer who is ever on guard against a sore throat, but can you think of an audio technician who has taken consistent action over the past five years to protect his ears? Here are some of the things we tend to forget:

- Headphones are dangerous! Most of us have learned, perhaps the hard way, not to wear phones directly over our ears while plugging into a jackfield or other source. Just when we are looking for a nice line-level tone of +4 dB, we jack into a +38 amplifier output and nearly rip out the lining of our cranium. Such damage may be permanent. Just as it's the suddenness of a karate chop that breaks a plank, the sudden blast of even a moderate sound from flush-worn headphones may tear an eardrum from its delicate moorings.
- Ears need rest! Get away from loud sounds as often as possible. Let your ears "catch their breath" from time to time. One sure way to tell that you need a moment's rest

is when you find you can't seem to bring your monitor pot back down to the mark where it was at the beginning of the day. Take five!

• Our ears need to be flushed out and our hearing needs to be checked on a regular basis. Beltone Electronics, longtime makers of reputable hearing aid devices, reminds us that one kind of hearing loss is nothing more than wax in our ears! Incidentally, their advice on *hearing health*, while directed toward the layman, may be of special interest to professional audio people. While they emphasize that no two hearing problems are identical, they list six preventative steps which go a long way toward protecting our hearing, and a seventh which may be a bit more difficult to observe. Here they are.

1. Keep all foreign objects away from your ears.
2. Have your ears tested immediately after any serious ear infection.
3. Follow a regular pattern of hearing tests, just as you have regular physical check-ups and eye examinations.
4. Keep ears free of wax.
5. See a doctor if you . . . suspect damage to an ear, from a blow or a jolt, from a sudden sharp noise, or even a head injury where there is no obvious damage in the neighborhood of the ear.
6. Protect your ears from water damage. Extensive swimming, in either salt or fresh water, may cause bony growths which narrow the ear canal.
7. (*Here it comes, folks*) Avoid persistent loud noises.

In closing, here's a word about test equipment. Most of us deal with an array of gear that we couldn't even cram into a husky station wagon, everything from oscilloscopes and notch filters to assorted detectors and spectrum analyzers. If we have to transport these from one place to another we take care to box them carefully and surround them with pads or quilts so they don't get joggled in transit. True, insurance policies may replace them in case of damage, and they have the marvelous feature of being real tax deductions as necessary tools of the trade; still, we don't like the idea of having to replace them, even though it's possible to do so. That's why we give them supergentle care: these delicate tools are our life's blood.

Yet, as audio technicians, we are somehow not so careful about the most valuable tool we own, one which is absolutely irreplaceable: our hearing. We take our ears with us wherever we go, almost never protect them from shock, expose them to such extremes as scuba diving, Kawasaki windblast, not-so-gentle passionate whispers, and amplified music which can blow out a Tiki torch at 50 feet. Even more disheartening is that we get no credit for their extreme importance to our livelihood: we can't get them insured as a valuable tool separate from the rest of our body, and the Internal Revenue Service will not allow us to claim depreciation on an implement which, in thirty years of professional work, can bring in a gross income of a million dollars. In short, our ears need our own loving care, for they have enough trouble coping with such terrible sounds as "Not tonight, Charlie" without getting blasted into calcification. ■



## If you can afford one of the others, you can afford two of ours "Son of 36 Grand"

Son of 36 Grand is a complete recording/remixing console expandable to 26 in, 16/24 out. Full quad capability and flexible, pushbutton monitoring of any mode. FET logic record/play mode switching. Built-in patch bay. Prices start at less than \$18,000 for 16 in, 16/24 out.

Write or call for the full story on Son of 36 Grand.



**auditronics, inc.**

P. O. Box 12637 / Memphis, Tenn. 38112 / 901/276-6338

Circle 23 on Reader Service Card

# A Stereo Phase Indicator

*This easily built component can be of inestimable aid in multi-channel work—and in the checking of the final mix.*

SOME YEARS AGO I built a visual stereo phase indicator which enabled stereo microphones to be correctly phased before a recording session. It also allowed the phase and width to be monitored throughout the recording. This unit was based on a cathode ray oscilloscope display similar to the Lissajous figure experiment—the left channel was applied to one set of deflection plates, and the right channel to the other. Thus in-phase signals deviated along one axis, and out-of-phase components along the other (FIGURE 1).

Cathode ray tubes are bulky devices, requiring high voltages as well as having a heavy heater current consumption. I had often considered designing a simpler circuit but as usual nothing was done until the oscilloscope failed at an important session. This of course was not disastrous since ears can always be used with usually identical results; but sometimes it is possible to become confused in reverberant situations. There are also a few occasions when it is not possible to monitor the signal for one reason or another. After this particular session I decided to build a simple phase detector circuit which would register the phase between two signals on a meter, thus giving an unambiguous indication.

A little thought showed that a circuit which showed instantaneous phase differences between signals would be misleading. With all but truly coincident microphones, signals arise with phase differences corresponding to frequency and separation of the microphones. It is the average phase difference which is important, so that some method of integration is required; quite apart from the need to read the meter! A quick experiment showed that the integration time of the moving coil meter was not sufficient by itself, so that some electronics would be

---

*David Robinson is well-known to British audio pros. This article is adapted from one which originally appeared in the British publication Studio Sound.*

necessary to provide the necessary information storage and averaging.

Conventional phase metering techniques were examined, but soon rejected. Procedures normally used are to take the two incoming sine wave signals and square by either overdriving and clipping, or by using a Schmitt trigger circuit, or by detecting zero-axis crossovers. Two trains of square waves are then produced, differing in on-off time positions according to the relative phase of the two incoming signals. The two trains are used to turn a further two-state stage on and off, producing a square wave whose on-off time varies according to the phase. This difference can then be read out on a meter which responds to the average d.c. component of the pulse as shown in FIGURE 2.

This represents a complicated piece of electronic equipment, and is generally only suitable for sine waves or regular shaped input signals. A much simpler scheme, following some of the basic reasoning of the complex arrangement outlined above, was tried and found to be entirely satisfactory. FIGURE 3 is a block diagram of the meter.

Incoming signals pass to addition and subtraction stages; if we call our input signals A and B then the outputs from these stages are (A+B) and (A-B), respectively. Diodes D1 and D2 rectify the signal and a center zero meter is connected between them. Consider what happens if the two signals are of equal amplitude but out of phase, e.g.  $B = -A$ . The output from the sum channel is  $A + (-A) = 0$ ; from the difference channel  $A - (-A) = 2A$ . A current flows from point Y to point X, and the meter deflects accordingly.

If the signals are in phase,  $A = B$ . The sum output is  $2A$ , the difference 0. The direction of the output current flow is reversed, from X to Y, and consequently the meter deflects in the opposite direction.

If input B is missing, the outputs from both sum and difference stage is A, so no deflection occurs. (The circuit as drawn is not fully satisfactory, since, according to the drawing, with input  $A = 0$  the meter will deflect; however, it serves to explain the design concept.)

The easiest method of realising the sum and difference amplifier is to use integrated circuits. Operational amplifiers can be obtained with high open loop gains that with the addition of feedback produce arithmetic accuracies far beyond the requirements of this application. Integrated circuits used in this way are a boon to a constructor, allowing complicated circuits to be wired up with the minimum of effort. High loop gain also allows for the possibility of considerable closed loop gain without degradation of the circuit operation.

To buffer the i.c. from input and output loading, another i.c. is used. I.c. is somewhat of a misleading term here, for although fabricated on a single chip, the elements inside are four discrete transistors. In practice, such a device is only useful in highly automated mass production situations, where assembly time is significant. For building experimental circuits the time spent in figuring out the interconnections makes this i.c. somewhat useless, but I must admit the total package looks better.

FIGURE 4 shows the finalized circuit. Incoming A signals are passed to Tr-3 acting as an emitter follower; the input impedance is about  $20\text{ k}\Omega$ . Tr-3 output drives both i.c. amplifiers (actually both are in a single package) via R3 and R13, feeding the negative or inverting input in both cases. Channel B, on the other hand, feeds the inverting input of one i.c. amplifier, IC2a, and the non-inverting input of the second, IC2b. The output of IC2a is therefore  $-(A+B)$  (negative as the amplifier inverts), and from IC2b is  $-A+B$ , or  $-(A-B)$ .

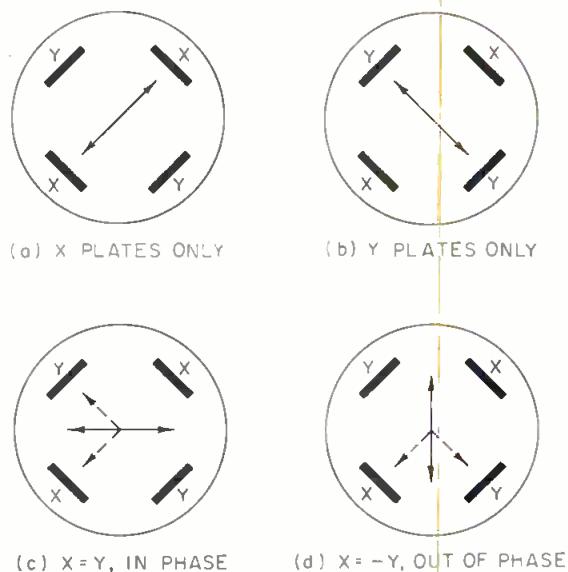
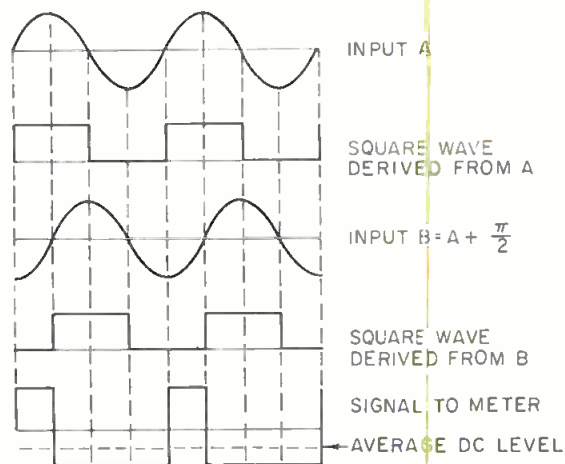


Figure 1. Oscilloscope presentations of phase.

Detailed arithmetic gives the gain into the subtraction terminal of the i.c. as  $G = -\frac{R15}{R13}$  while into the summing terminal as  $G = 1 + \frac{R15}{R13}$  (not  $\frac{R15}{R13}$ ). Thus for small closed loop gains the extra factor 1 must be taken into account, the input to this terminal must be reduced, and this is the function of the attenuator R14/24. The gain using this added circuitry is  $\left(\frac{R24}{R14 + R24}\right) \left(1 + \frac{R15}{R13}\right)$  and this must also equal  $\frac{R15}{R13}$ . Further arithmetic gives  $R24 = \frac{R14 \times R15}{R13} = R15$  (as  $R14 = R13$ ).

Figure 2. Phase measuring techniques.



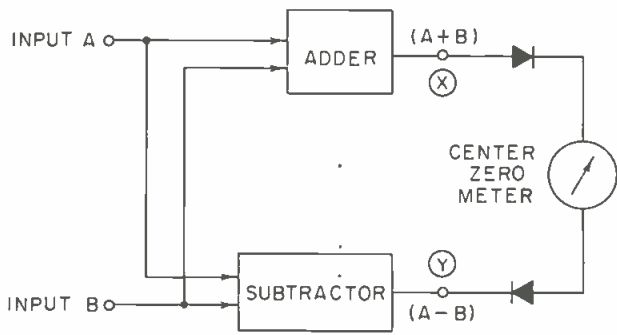


Figure 3. A simplified diagram of the phase indicator.

Thus if R15 is altered to change the over-all gain to suit different input signal levels, R24 must also be changed accordingly. (Because of the difficulties in circuit layout on the printed circuit board, it was easier to return R24 to 0V via C13; in a wired layout, R24 can be returned directly to the mid-voltage supply  $V_2$ , omitting C13). The gains of both IC2a and IC2b are controlled by the two feedback resistors R5 and R15 respectively, and can be adjusted to increase or decrease the sensitivity; increasing R5 increases the gain; R15 must always equal R5 for correct operation. With a large open loop gain (80 dB) and a closed loop gain of 6 dB, the amplifiers are almost ideal; there is no interaction between channels, and common mode rejection (measure of the effectiveness of giving no output from IC2b for  $A=B$ ) is excellent.

Most integrated circuits suffer from too much gain at high frequencies. Since the connections are short, and the transistor sizes so small, the natural cut-off frequency may be many hundreds of megahertz. With components so close and because of the method of construction, there will be inevitably stray capacitance between parts of the circuit. This often turns negative feedback paths into positive feedback routes, and results in the amplifier oscillating at high frequency. It is therefore necessary to shape the amplitude/frequency response to prevent there being greater than unity gain at the point where the feedback changes sign. Two networks are used to perform this

bandwidth restriction; C10 and R21 shape the response of the input stages, and C9 tailors the output side of the i.c.

The two combined signals are taken to two emitter followers Tr2 and Tr5, part of IC1, which isolate the detection circuitry from the adder and subtractor amplifiers. The rectifiers charge capacitor C5 either positively or negatively. Although C5 is a polarized device, it can stand the small reverse voltage if a tantalum device is used. The capacitor feeds a 50-0-50  $\mu$ A center zero meter. The prototype used a Japanese meter; the original scale was sprayed white, and a new center line with - and + signs added with dry marker on appropriate sides.

The detection circuit works as follows. For all signals, the output of Tr2 is  $-(A+B)$ , and from Tr5 is  $-(A-B)$ . If  $A=B$ , then Tr2 output is  $-2A$ , and Tr5 is zero. C5 is charged on the positive half-cycles of this wave, and the meter deflects to the right.


If  $A = -B$ , then Tr2 output is zero and Tr5 output is  $-2A$ . D2 is connected so as to pass negative half-cycles and therefore C5 is charged negatively; the meter deflects to the left.

If only signal A is present, Tr2 output is  $-A$ , and Tr5 output is also  $-A$ . On one half-cycle D1 attempts to conduct, on the other D2 in opposition; the net average charge on C5 is zero and no deflection occurs.

If only signal B is present, then Tr2 output is  $-B$ , and Tr5 is  $+B$ . Again, remembering the - and + signs here represent phase of the signal only (IC2 inverts A signals, but not B), the net charge in C5 is zero, being determined by the polarity of the two diode connections.

The circuit is easy to set up. Applying the same sine wave 1 kHz signal of 0 dB to both A and B inputs should cause positive full-scale deflection, or slightly over, with the values given. (If a negative indication occurs, reverse the meter connections.) This input signal should correspond to a signal of somewhere about 4 dB below peak recording level, that is, about 0 UV. If the unit is being used with other signal levels, a wide range can be accommodated by changing R5 and R15, up to a maximum of 470 k  $\Omega$  for 120 mV sensitivity or down to 10 k  $\Omega$  for a 6V input. The unit is then set up, and can be fully checked if a suitable transformer or phase reversing circuit is available. If out-of-phase signals are fed into the circuit, the meter should deflect to the other full-scale position.

Figure 4. The complete phase indicator circuit.

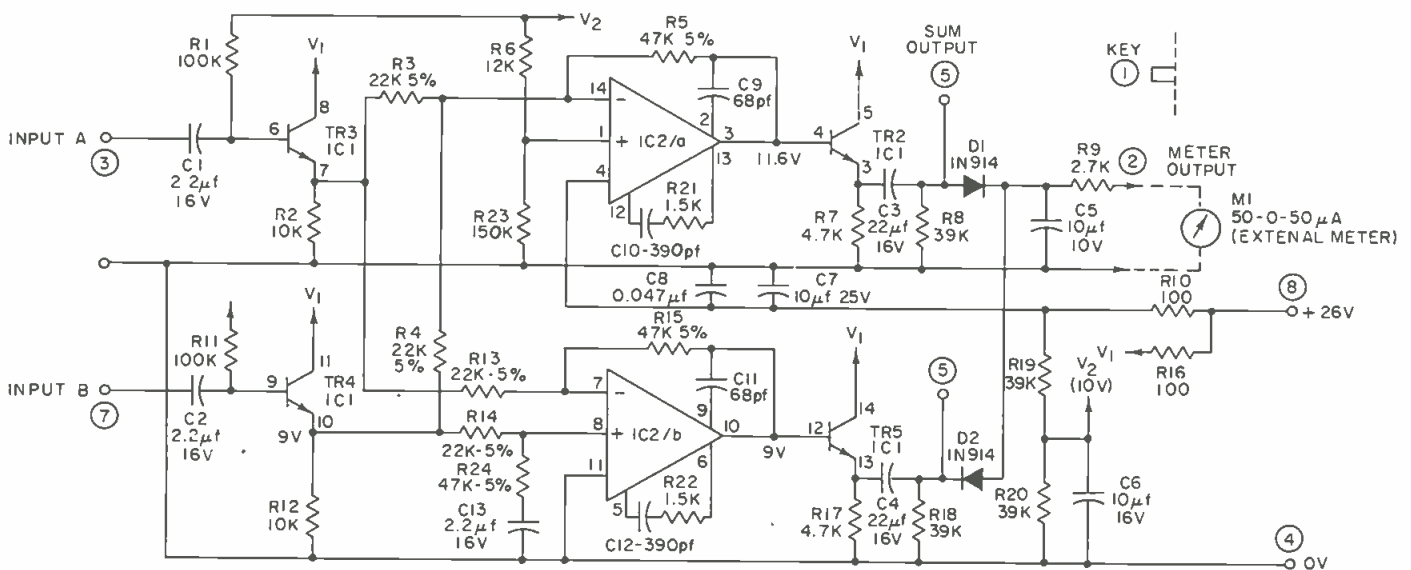



## Component Suppliers

1. Texas Instruments for Integrated Circuit type SN72709N available from Charles Levine, Buyer, Radio Shack, 2617 West 7th Street, Fort Worth, Texas 76107.

This presumably means all Radio Shack outlets can supply; a call to your local shop would answer this one.

2. Union Carbide for dipped tantalum capacitors. Type numbers are the same, but they are in the midst of changing to a new computerized scheme. It would be best to quote both.

K3R3E15	T 360 A335 M 015AS
K22E15	T 360 B226 M 015AS
K10E20	T 360 B106 M 020AS
K6R8E35	T 360 B685 M 035AS

or T 362 etc. for all.

from Schweber Electronics, 11590 Jericho Turnpike, Westbury, New York, or Semiconductor Specialists, 195 Spangler Avenue, Elmhurst, Illinois.

3. RCA for Integrated Circuit CA3086. RCA's response was to get the UK branch to send me the UK list, which wasn't very helpful. However, if you contact Mr. J. F. Wilhelm, Manager Commercial Engineering, Central and Terminal Avenue, Clark, New Jersey 07066, he should be able to give you all the details. Prices for components can be had from the addresses listed above.

A signal applied to any single input should cause no deflection, although one or two mm is permissible—further deflection indicates that the resistances R3, 4, 13, 5 and 15 are not as precise as they might be. If the deflection is considerable, R15 or R5 may be slightly varied to correct the meter deflection. A significant variation (more than 10 per cent) implies some circuit error.

Construction is not critical, except that power supply decoupling must take place near IC2 with both electrolytic and non-electrolytic capacitors (C7, C8); the minimum impedance of electrolytic capacitors is about 4  $\Omega$  which is often insufficiently low to prevent h.f. oscillation. The circuit operates on any voltage from 28V to 12V with no component or performance change. Current consumption is 10 mA at 24V, which means batteries can easily be used if necessary.

After the initial testing, much innocent amusement was derived from playing tapes and records into the unit, before settling down to use it in recording sessions. Multi-mike techniques showed up clearly as either no or little deflection, as did early stereo records with only left and right signals. Even older mono records showed a steady deflection to the right, as expected of course. I even rediscovered one out-of-phase record which I had been keeping as an example of how the early stereo record producers had not yet organized foolproof procedures. Phasing didn't matter in mono days, and there are very many transformers between master tape and master disc cutter, each with the possibility of phase reversal.

Those constructors who wish to mount the unit in their mixers will, I am sure, not find any difficulty in squeezing in the meter. An alternative display would be a miniature edgewise version; accuracy is not required, just the ability to register a positive or negative deflection. In the months since it was built the prototype has already proved itself very useful, and has helped to clarify many a doubtful phasing problem. ■

If paging speakers  
all seem about alike  
to you...wait  
'til you get to  
the top  
of the  
ladder  
to install  
them!



*Electro-Voice  
Paging Speakers  
... If you pay less  
it may cost you more!*

How many trips up the ladder does it take you to finally install a paging speaker? (Be honest and include the times you drop hardware, and the extra trips to change level or positioning). Good news! E-V has made paging speaker installation easier and faster.

Now you need fewer tools and less time to get better sound. Speaker base removes for easy mounting, and it won't fall apart in your hands in the process. There are no screw terminals to short out, pigtailed are already attached, no transformer cover plates to unscrew, and final speaker positioning is simple and positive.

All this and great sound in the bargain. Plus competitive prices on every model. More than a dozen from which to choose. Write today for our catalog or see your nearby Electro-Voice sound merchant.

ELECTRO-VOICE, INC., Dept. 1226BD,  
686 Cecil Street, Buchanan, Michigan 49107  
In Europe: Electro-Voice, S. A., Römerstrasse 49, 2560 Nidau, Switzerland  
In Canada: EV of Canada, Ltd., Genanogue, Ontario

**Electro-Voice**<sup>®</sup>  
a Gulton  
COMPANY

Circle 16 on Reader Service Card

ROBERT SCALES

# The Sound System of Stratford

*The Festival Theatre of Stratford, Ontario, Canada installed a new playback sound system with versatile control characteristics, not the least of which is quad panning.*

**T**HE 1972 season opened at the Festival Theatre with several new technical improvements. One is the introduction of a new sound playback system for using recorded music and effects in the course of a production as well as enhancing the live music and effects from the traditional orchestra loft.

The Festival sound system is designed primarily as a playback system; therefore, the functions of the system are much simpler than if the console were to be used as a record, mix down, and remix system.

The primary function of the new playback system is to provide the means for one operator easily and accurately to place any sound—without extraneous noise or mechanical difficulty—into the theatre so that it appears to be coming from a certain direction, from no direction, or from all directions at any level desired.

The new system is composed of three units—tape recorders, the sound console, and power amplifier and speakers.

## **TAPE RECORDERS**

The theatre has two Scully 280, ¼-inch, two-channel portable tape recorders. A special control device, *Auto-*

---

*Robert Scales is the technical director of the Stratford Shakespeare Festival Foundation of Canada, located in Stratford, Ontario.*

*Cue-2*, has been engineered, built, and installed on these two machines by Sound of Minneapolis, Minnesota. By using a photo cell arrangement forward of the heads in the head canopy and a related logic amplifier card, the Scully machines automatically cue up on the tape after white leader. The special control device is unique in that no matter how much leader one puts between cues, the machine will play through to the next cue and stop just before the tape of the next cue hits the playback head. A photo cell auto-cue device was chosen for this function because the Festival generally uses white leader in preparing tapes. White paper leader makes a good surface for writing identification of each cue cut. In addition when the tape machine stops and starts on the paper leader, there is no static or electrical noise caused by the head's contact with the leader.

When the Auto-Cue-2 is engaged, the operator threads the machine with the beginning of the show tape which is prefaced with white leader. After the machine is threaded, all the operator must do is push *play*; the machine will then run until the photo cell senses tape (black), and it will stop the machine. At 7½ in/sec this places the start of the cue about two inches from the playback head. Auto-Cue-2 functions only on *play*. When *play* is pushed, the machine will run until it senses leader (white) and will automatically turn off once it senses tape (black). The machine is automatically disengaged when *fast forward*, *reverse*, and *stop* buttons are in operation.

The operator merely starts the machine for each cue to run a show. He has remote switches on the console enabling him to start two or more machines with one

#### THE SOUND CONSOLE

hand and still fade up volume controls if necessary. Once the machine has started, it will continue to play until it stops at the point where it is already cued up for the next cue.

We would like to include another feature to our tape machines that would enable the operator to call up any cue on the tape and automatically and accurately go to any spot on the tape by giving a simple command on the console. As soon as funds are available, plans are to add a four-channel Scully 280 with Auto-Cue-2.

The usual design of radio, t.v., and recording studio consoles is to take numerous input channels and to mix and remix them down to one-, two-, or four-output channels. The Festival Theatre console is designed to do the opposite of this function. The Festival console is designed to take one to twelve inputs and to place the sounds about the theatre in a very specific manner. On the right side of the console the most important information at the console is displayed in advance of a cue—that is, what is happening or going to happen at each speaker in the house. There are twenty-four speakers; each one has a visual indicator monitoring level with individual volume control and a visual display in lighted switches of any or all of the inputs which have been selected to each speaker. All of the monitor functions about each speaker that the operator needs to know are easily read out in a staright line on the right side of the console.

The operator has all active functions for operating a cue on the left side of the console, whereas all preset functions are on the right side of the console. The active functions include the remote controls for the tape recorders, attenuator controls for the inputs, and by the quad pot.

With the quad pot it is possible to take any or all inputs and channel the signal through the quad pot to any or all of four channels selected by the quad pot. The quad pot shares channels 9, 10, 11, 12 with inputs 9, 10, 11, 12. The quad pot is mastered by a separate attenuator.

## SUDDENLY- IT'S 1937!

Community Light & Sound introduces the bass horn—with efficiency that harkens back to the theatre horns of the 30's when 20 watts could make the screen talk. Only now, in the 70's, our Fiberglass Leviathan will take 20

times that power, and produce 136 dB in the process. It weighs 115 pounds (less drivers) and nests to 30" length to travel — the Leviathan is truly a portable bass horn. The RH60 radial horn pictured, also of Fiberglass, is considered by its users to be the best horn of its type available. Please write or call for further information.


*We aren't really doing anything new, we're just doing it right.*

## COMMUNITY LIGHT & SOUND

P.O. Box 21759, Philadelphia, Pa. 19146 • 215 — 468-2001

Dealer inquiries invited

Circle 20 on Reader Service Card

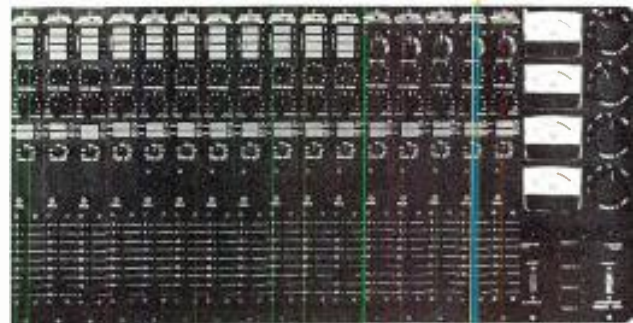

### SERIES 100 MIXERS

Series 100 mixers are available in the Model 16X4 prewired frame shown above which accommodates up to 16 modules, and in the popular portable Model 8X4, which takes up to eight modules.

The standard model 8X4-100-2C is a professional quality portable mixer measuring 15x18x5" and weighing 18 lbs., has eight plug-in modules switchable to 200 ohm XLR-type mike inputs or line inputs, each providing push-button track selection, echo send, equalizing, solo button, slider attenuators; two with compressors. Integrated circuits throughout, four track outputs, max. 20 dbm to 600 ohms with masters, VU meters, XLR output connectors, two monitor mix-downs; other models with optional internal reverb. Price \$1900.00 FOB Houston.

Series 100 mixers may be had with any combination of seven modules:  
 Model 100A standard equalizing      Model 100C compressor equalizing  
 Model 100AP panpot equalizing      Model 100CP compressor/panpot  
 Model 100AQ quad equalizing      Model 100CQ compressor/quad.  
 Model 100B multifrequency equalizing

Other options include built-in reverb and the C-1 Cover for the 8X4. Call or write for further details, prices, and address of nearest dealer. Dealer inquiries invited.

### INTERFACE ELECTRONICS

3810 WESTHEIMER • HOUSTON, TEXAS 77027 • (713) 626-1190

Circle 22 on Reader Service Card


One of the unique features of the Festival console is that it enables presetting of cue switching in advance. For instance, we are presently using two and sometimes three machines, four channels of sound. Each of these channels can be programmed into more than one input. We label our machines *A, B, and C* and *A1, A2*, etc. for channels on each machine. Normally we use two machines, each with mono signals on each channel of the machine. For cue *one*, tape A1 on input 1 is used; for cue *two*, if there are speaker switching changes, tape A2 on input 2 is used; for cue *three*, if speaker switching changes are needed, tape A1 on input 5 is used, etc. The quad pot enables a four-preset speaker selection to any single input or single mix of inputs.

Generally two tape machines are used for a total of four channels. It is possible to put these four inputs into the console three times which enables an operator to set up switching for several cues in advance. All the operator needs to do is start the tape machines and control the input volume levels to the various preselected switching.

The console is simple to operate. It is not cluttered with input to mastering switching, mastering devices, special effects equipment (although there are four channels of equalization), etc.

The Festival Theatre sound console was electronically designed, engineered, and built by Ward-Beck Systems, Ltd. of Scarborough, Ontario, Canada. The console and amplifiers were installed in the theatre by the Festival Theatre technical staff.

When the sound system is used as a public address system, portable microphone mixers are used in the theatre, backstage, or in the sound booth and programmed to any input channel of the console desired.

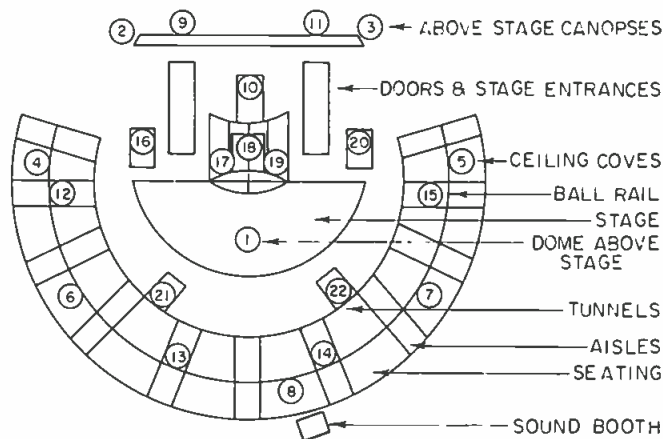

Console Color	Console Channel	Speaker Location
Orange	1	Dome
"	2	Above orchestra S.R.
"	3	Above orchestra S.L.
"	4	Back of house cove between bal. aisles 1 & 2
"	5	Back of house cove between bal. aisles 10 & 11
"	6	Back of house cove above bal. aisle 4
"	7	Back of house cove above bal. aisle 9
"	8	Back of house cove between bal. aisles 6 & 7
Yellow	9	Above louver door S.R.
"	10	Backstage of balcony entrance center stage
"	11	Above louver door S.L.
"	12	Balcony rail above aisle 2
"	13	Balcony rail above aisle 5
"	14	Balcony rail above aisle 7
"	15	Balcony rail above aisle 10
White	16	Backstage of S.R. door
"	17	Portable S.R. (3 outlets: S.R. corridor, center entrance wall S.R., bal. entrance wall S.R.)
"	18	Backstage under balcony
"	19	Portable S.L. (3 outlets: S.L. corridor, center entrance wall S.L., Bal. entrance wall S.L.)
"	20	Backstage of S.L. door
"	21	Tunnel S.R.
"	22	Tunnel S.L.
Green	23	Underworld (commonly used as monitor channel in control booth)
"	24	Under stage balcony (commonly used as monitor channel in control booth)

Figure 1. The table and graphic display of speaker locations at the Stratford Festival Theatre.

### POWER AMPLIFIER AND SPEAKERS

There is one channel of a Crown D 150 stereo amplifier driving each of the twenty-four speakers. There is only one speaker on each channel. Plans are to add some speakers but no more amplifiers. The additional speakers will be paralleled with existing speakers and will make the coverage of the existing speaker locations more complete. All speakers in the theatre are 15-inch Tannoy Monitor Dual Concentric Gold in *Belvedere* enclosures.

The chart of Figure 1 shows the speaker locations in the theatre. ■

# SCHOEPS

## CONDENSER MICROPHONES

### The Quality Standard Throughout The World



A compatible microphone for all powering systems  
 12V Centerfeed      12V Parallel  
 48V Centerfeed

Classical acoustic pattern shaping for uniform response

Exclusive single diaphragm Hypercardioid pattern

World's smallest three pattern condenser microphone

Utilizes standard American accessories



**GATELY ELECTRONICS**

57 WEST HILLCREST AVE. • HAVERTOWN, PA. 19083

... have you checked Gately lately? 215-446-1415

# db Visits— Scully-Metrotech

**S**CULLY IS ALIVE AND WELL in northern California. We recently drove down the pike from San Francisco, passing along the way another famous tape machine manufacturer, and came to the new facilities built to house both the Scully and Metrotech divisions of the parent Dictaphone Corporation.

The modern plant has 41,000 square feet of space in Mountain View, California. The building is nestled in a large industrial park, but access is good, and location is ideal. The plant has been in operation since May 1 of this year. During our initial visit for that event, mostly Metrotech equipment was running, but another camera poking came up later with the illustrations of Scully construction that is now in progress. (For those that don't yet know, there is no facility left in Bridgeport, Connecticut.)



*The new plant in a rare moment when autos are not driving by.*



*The engineering department at Scully-Metrotech. Kay Toyota, chief engineer (left center) is discussing product design with engineering consultant Jay McNight (center right).*

*A partly finished Scully 280 takes shape under the hands of Willie Pittman (right) and Ray Reynolds.*



*A view down the line as Scully 280 transports gradually become assembled.*

*A technician checks partly finished 280 transports as they progress along the line.*



# Foot loose

'n fancy free. That's us.



**Beautiful schooner.  
Exciting li'l West Indies Isles.  
And you.**

**If you're congenial and  
would like to sail with a  
small, intimate group,  
we're for you and you're  
for us. Now forming to sail.**

**Your share from \$245.  
10 great days. Hurry.  
Write today for information.**



**Windjammer Cruises.**

Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Phone \_\_\_\_\_

P.O. Box 120, Dept. 970D . Miami Beach, Florida 33139




*In other parts of the plant Scully 270 models are being assembled. This is a test station.*



*When the line work is finished, a Scully 280 goes to an individual calibration station.*

*Final test and adjustment of the new Scully 100 16-track recorder.*

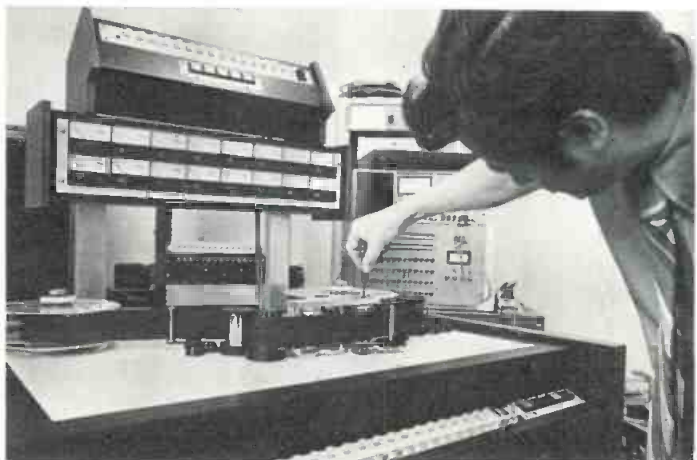


# stop watches

These are Switzerland's finest quality stop-watches manufactured by Heuer-Leonidas S.A. Heuer has been the leading manufacturer of quality stopwatches for over 100 years. Their reliability and design leadership are well known throughout the world.


All are fully guaranteed for one year with service available in 90 countries. Isn't it time you had one of these new models?

If you are seeking a stopwatch for a special application please let us know. Heuer stopwatches are available for sports, aircraft, automotive, industrial, scientific and many other uses.




Model 502.401

1/5 second recorder, central 0-60 minute register. 2 crown functions with time-out and locked return. 7 jewels, shock-protected. \$58.00



Model 501.201

1/5 second recorder, central 0-60 minute register. 1 crown function with side-slide. 7 jewels, shock-protected. \$50.00



Model 508.422

FILM-MASTER. 60 second recorder, central 0-60 minute register. Records on outside scale consumed 35 mm film from 1-90 feet, on intermediate scale consumed 16 mm film from 1-36 feet. Framespeed 24 pictures/second. 2 crown functions with time-out and fly-back return. 7 jewels, shockprotected. \$61.00



Model 502.050

WRIST TIMER for program directors in radio, TV and film. 1/5 second recorder, central 0-60 minute register. Dial reading indicates elapsed time; remaining time can be read on 60 minute turning bezel. 2 crown functions with time-out and locked return button with safety bolt. 7 jewels, shockprotected: \$74.00

## GUARANTEE

100% absolute satisfaction or your money returned within 10 days without question. To order send check directly to:

# TIMEKEEPER

P.O. Box 835, Great Neck, N.Y. 11021  
N. Y. State residents add 7% sales tax

# TIMEKEEPER TAPE TIMERS back in stock!

The well-known TIMEKEEPER TAPE TIMERS are now available for immediate delivery. Our latest shipment has arrived and we are ready to fill your order

TIMEKEEPER TAPE TIMERS are easily mounted on any 1/4-inch recorder. They are fully guaranteed to meet with your complete satisfaction or your money will be promptly refunded. At these low prices you can no longer afford to be without a tape timer.


## Difference from the Stop-Watch

Since the stop-watch measures time independently of the travel of the tape, its measurement inevitably varies with the elongation or contraction of the tape and with the rotating speed of the tape recorder, subject to change by voltage and other factors. The stop-watch can be stopped during the travel of the tape, but it cannot rewind together with the tape back to the desired position. With the Tape Timer moving in unison with the tape recorder, fast forwarding of the tape involves the quick advance of the pointer, while rewinding of the tape moves the pointer backward by the corresponding time.


Correct time keeping of the Tape Timer is never deranged by continuous repetition of such actions during the travel of the tape, as stop, rewinding and fast forwarding. Unlike the stop-watch, the Tape Timer is not affected by various factors of the tape recorder, and so the editing, reproduction and revision of your recorded tape can be done at will.

## Features

- The recorded portion of the magnetic tape can be read at a glance by a scale division of 1/4 second as accurately as a clock.
- The performance of the Tape Timer synchronized with the tape prevents such errors as caused by the elongation or contraction of the tape, and by the variation of speed in the rotation of the machine. Fast forwarding of the tape involves the proportional increase of the advance on the Tape Timer. When you rewind the tape, the pointer will be automatically moved back by the space of time exactly corresponding to the rewound length. You are free to stop, rewind, fast forward, or forward the tape even continuously and repeatedly without deranging the timing on the machine, thus prohibiting errors. These excellent characteristics will enable you to simplify the most complex procedure of editing, revising and otherwise processing your tape recording.
- Every fast rotating part is provided with a precise ball bearing, so that the Tape Timer can be employed at high speed with no need of lubrication.
- This trouble-free, high precision Tape Timer, within an error of 2/1000, can be simply fitted to any recording or editing machine.

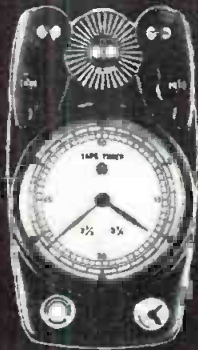

The Standard Model is calibrated for 7.5 and 3.75 ips and can also be used at 15 ips. Dimensions are 1 7/8" x 3 1/4". It is priced at only \$49.95.

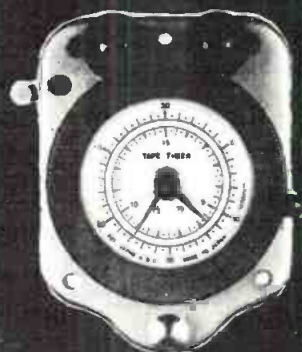

The Professional High Speed Model is calibrated for 7.5 and 15 ips. It measures 2 1/2" x 3 1/4" and is priced at \$99.95.

## TIMEKEEPER

P.O. BOX 835  
GREAT NECK, N.Y. 11021

Please send \_\_\_\_\_ Professional Tape Timers at \$99.95 each.

Please send \_\_\_\_\_ Standard Tape Timers at \$49.95 each.

Total for Tape Timers \$ \_\_\_\_\_

N.Y. State Residents add 7% Sales Tax \$ \_\_\_\_\_

Add \$1.00 shipping per order \$ \_\_\_\_\_

Enclosed is check for \$ \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State, \_\_\_\_\_ Zip \_\_\_\_\_



As a service to our readers we are pleased to offer books from prominent technical publishers. All prices listed are the publishers' net. Shipping charges are included.

To order use the coupon at the bottom of the page. Indicate quantity on the special instructions line

If more than one copy of a title is wanted. Full payment must accompany your order. We cannot ship c.o.d. Checks or money orders should be made payable to Sagamore Publishing Company, Inc. Because of the time required to process orders, allow several weeks for the receipt of books.

# BOOKCASE

**20. The Audio Cyclopedia (2nd ed.).** *Dr. Howard M. Tremaine.* New and updated, here is the complete audio reference library in a single volume. It provides the most comprehensive information on every aspect of the audio art. This new edition includes the latest audio developments including the most recent solid-state systems and integrated circuits. It covers all subjects in the fields of acoustics, recording, and reproduction with more than 3400 related topics. Each topic can be instantly located by a unique index and reference system. More than 1600 illustrations and schematics help make complicated topics masterpieces of clarity. 1760 pages; 6 1/2 x 9 1/2 hardbound. **\$29.95**

**1. The Technique of the Sound Studio.** *Alec Nisbett.* This is a handbook on radio and recording techniques, but the principles described are equally applicable to film and television sound. 264 pages; 60 diagrams; glossary; indexed; 5 1/2 x 8 1/2; clothbound. **\$14.50**

**7. Acoustical Tests and Measurements.** *Don Davis.* Provides solid understanding of the entire subject of acoustical measurements; based on actual field test work, using commercial equipment. 192 pages; 5 1/2 x 8 1/2; hardbound. **\$6.95**

**8. Handbook of Electronic Tables & Formulas, (3rd edition).** A one-stop source for all charts, tables, formulas, laws, symbols, and standards used in electronics. Includes an 8-page, full-color fold-out chart showing latest FCC allocations for the entire frequency spectrum. 232 pages; 5 1/2 x 8 1/2; hardbound. **\$5.50**

**24. Basic Electronic Instrument Handbook.** *Edited by Clyde F. Coombs, Jr. Hewlett-Packard Co.* A basic reference background for all instruments. Offers saving in time and effort by having complete information in one volume on how to get the most benefit from available devices, how to buy the best instrument for specific needs. Reduces chances of costly errors. Ideal reference book, it is an excellent source for the beginner, technician, the non-electrical engineering man, or general non-engineering scientific and technical personnel. 800 pages. Hardbound. **\$28.50**

**25. Operational Amplifiers-Design and Applications.** *Burr-Brown Research Corp.* A comprehensive new work devoted entirely to every aspect of selection, use, and design of op amps—from basic theory to specific applications. Circuit design techniques including i.c. op amps. Applications cover linear and non-linear circuits, A/D conversion techniques, active filters, signal generation, modulation and demodulation. Complete test circuits and methods. 474 pages. **\$15.00**

**26. The Design of Digital Systems.** *John B. Peatman.* Textbook for students desiring to develop a creative approach design capability through digital systems approach. Answers these questions: Under what circumstances it is desirable to implement a system digitally? What are some of the components available for implementing the system? How do we go about designing it? 448 pages. **\$15.50**

**31. Solid-State Electronics.** *Hibberd.* A Basic Course for Engineers and Technicians. An extremely practical reference book for anyone who wants to acquire a good but general understanding of semiconductor principles. Features questions and answers, problems to solve. 1968. 169 pp. **\$9.95**

**32. Circuit Design for Audio, AM/FM, and TV.** *Texas Instruments.* Texas Instruments Electronics Series. Discusses the latest advances in design and application which represent the results of several years research and development by TI communications applications engineers. Emphasizes time- and cost-saving procedures. 1967. 352 pp. **\$14.50**

**35. An Alphabetical Guide to Motion Picture, Television, and Videotape Productions.** *Levitan.* This all-inclusive, authoritative, and profusely illustrated encyclopedia is a practical source of information about techniques of all kinds used for making and processing film and TV presentations. Gives full technical information on materials and equipment, processes and techniques, lighting, color balance, special effects, animation procedures, lenses and filters, high-speed photography, etc: 1970. 480 pp. **\$24.50**

**40. Radio Transmitters.** *Gray and Graham.* Provides, in a logical, easy-to-understand manner, a working knowledge of radio transmitters for quick solution of problems in operation and maintenance. 1961. 462 pp. **\$16.00**

**23. Wide Screen Cinema & Stereophonic Sound.** *M.Z. Wystozky.* First published in USSR in 1965 this excellent English translation covers wide gauge films, panoramic films, circular panoramic cinematography; technical fundamentals of stereo sound recording for film, as well as details of the Soviet systems now in use. 284 pages. **\$15.00**

**33. Noise Reduction.** *Beranek.* Designed for the engineer with no special training in acoustics, this practical text on noise control treats the nature of sound and its measurement, fundamentals of noise control, criteria, and case histories. Covers advanced topics in the field. 1960. 752 pp. **\$19.50**

**27. Noise & Vibration Control.** *Edit. by Leo L. Beranek.* Practical design and regulatory information; formulas, choice of materials and structures, city codes and hearing protection; indispensable for design engineers, public officials who prepare regulations for noise control, safety and environmental engineers involved in noise and vibration controls. Covers data analysis, transmission of sound, psychophysiological design criteria, hearing damage risk, etc: Wealth of detail, comprehensive index and concise appendices. 650 pages. **\$29.50**

**28. Environmental Acoustics.** *Leslie L. Doelle.* Applied acoustics for those in environmental noise control who lack specialized acoustical training. Basic information in comprehensible and practical form for solving straightforward problems. Explains fundamental concepts; pure theory minimized. Practical applications stressed, acoustical properties of materials and construction listed, actual installations with photos and drawings. Appendixes illustrate details of 53 wall types and 32 floor plans and other useful data. 246 pgs. **\$18.50**

**21. Acoustics—Room Design and Noise Control.** *Michael Rettinger.* 1968. The enormous problems and hazards presented by noise are dealt within an orderly and practical manner. With many charts, graphs, and practical examples, the text covers the physics of sound, room acoustics, and design, noise and noise reduction. 392 pages. **\$17.50**

**22. Acoustics of Studios and Auditoria.** *V.S. Mankovsky.* Basic theory plus a mass of design data covers the field with special reference to studios and places of public performance. For acoustical designers and specialists in sound transmission in cinema and broadcasting. Features exhaustive treatment of studio acoustics by the statistical, geometric and wave methods in parallel. 416 pgs. **\$15.00**

Sagamore Publishing Company, Inc.  
980 Old Country Road,  
Plainview, N.Y. 11803

Please send me the books I have circled below. My full remittance in the amount of \$\_\_\_\_\_ is enclosed. N.Y. State residents add 7% sales tax.

1	2	3	4	5	6	7	8	9	10	11
12	13	14	15	16	17	18	19	20		
21	22	23	24	25	26	27	28	29		
30	31	32	33	34	35	36	37	38		
39	40									

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

Special Instructions \_\_\_\_\_

Canada and foreign: Add \$1.00 per book



# CLASSIFIED

## FOR SALE

NEW YORK'S LEADING supplier of professional audio/video equipment and hi-fi stereo components. All major brands in stock. Call for quote—sales—service—leasing—trade-ins. **Martin Audio, 320 West 46th Street, New York, N.Y. 10036. Telephone: (212) 265-6470.**

OLD RADIO RECORDINGS on cassettes or reels. Your favorite shows return. We have thousands of programs to choose from: Amos and Andy, Fred Allen, I Love a Mystery, Inner Sanctum, Sherlock Holmes, etc. Send 50¢ for our catalog to **Remember Radio Inc., Box 2512E, Norman, Oklahoma 73069.**

TELEX MODEL 235 CS-1 CASSETTE DUPLICATOR stereo reel master with up to 18 mono cassette slave capability. \$2100. **D. F. Taylor, RD #1, Box 135, Mill Creek Road, Hockessin, Del. 19707. (302) 239-7015.**

STUDIO TAPE ELECTRONICS. Advanced design incorporates all the desired features for updating or expanding outdated recorders or building new systems. Prompt delivery. **Inovonics, Inc., 1630 Dell Avenue, Campbell, Ca. 95008.**

OLD MICROPHONES 1920 to 1940. All makes and models. Also literature. Write **Bob Paquette, 443 N 31st Street, Milwaukee, Wis. 53208.**

FAIRCHILD 663 limiters, five available at \$100 each. Fairchild model 675 Dynamic De-esser, one available at \$100. **Accurate Sound Corporation, P.O. Box 2159, Garland, Texas 75041. Telephone (214) 278-0553.**

AMPEX PARTS, head stacks and head assemblies, complete inventory. Write for price quotation. **Accurate Sound Corporation, P.O. Box 2159, Garland, Texas 75041. Telephone (214) 278-0553.**

USED MYLAR TAPES. 1800 foot. Ten for \$8.50 postpaid. **Fremmerman, 4041 Central, Kansas City, Mo. 64111.**

FIDELIPAC CARTRIDGES, NAB approved factory new. All carts have minimum of six minutes worth of tape. Sold in cartons of 50 units only \$1.00 each. Send check with order. Satisfaction guaranteed. **Gately Electronics, 57 W. Hillcrest Avenue, Havertown, Pa. 19083.**

FOR SALE: Items from recording studio. Mixing console, Fairchild reverb units, Ampex 440-2 recorder. Better than \$10,000 value. Will sell at great reduction. Write **Box 252, Flora, Illinois or call (618) 662-3521.**

TRANSCRIPTION DISCS of old radio and music. Any size, speed. Send full details and price to **Kiner, Box 1274, Bellevue, Washington 98009.**

AMERICA'S LARGEST SELECTION of new and used broadcast and recording equipment! Latest bulletins available. **The Maze Corporation, P.O. Box 6636, Birmingham, Ala. 35210.**

WHATEVER YOUR EQUIPMENT NEEDS—new or used—check us first. Trade your used equipment for new. Write for our complete listings. **Broadcast Equipment & Supply Co., Box 3141, Bristol, Tenn. 37620.**


SOLID-STATE AUDIO MODULES. Console kits, power amplifier kits, power supplies. Octal plug-ins—mic, eq, line, disc, tape play, tape record, amplifiers. Audio and tape bias oscillators. Over 50 audio products, send for free catalog and applications. **Opamp Labs. Inc., 172 So. Alta Vista Blvd., Los Angeles, Ca. 90036. (213) 934-3566.**

HAECO announces complete repair service and overhaul for all Westrex cutterheads. Conversions of 3D-II and older models to higher performance standards and reliability. Helium cooling systems and hi-temp coils can protect your investment. Repair insurance program available. Rapid service. Lower cost. **HAECO, 14110 Aetna, Van Nuys, California 91401.**

AUDIO EQUIPMENT, new and used. Custom consoles built to your specifications using the components of your choice. Whether you're building a new studio or remodeling your present one, check us first for a package price. **Amboy Audio Associates, 236 Walnut Street, South Amboy, N.J. 08879. (201) 721-5121.**

NEW 8-TRACK STUDIO with Quad-Eight Electronics 1682 console, Ampex AG440-8 eight-track machine, JBL 4320 monitor speakers, and Marantz monitor-amplifiers and Quad-Eight cut amplifiers. \$30,000.00 full price including installation coordination. **Quad-Eight Electronics, 11929 Vose Street, North Hollywood, California 91605, (213) 764-1516.**

SCULLY TAPE RECORDERS—one to twenty-four track and model 270 auto players, many models in stock for immediate delivery. SCULLY LATHES—Previously owned and rebuilt. Variable or automatic pitch. Complete cutting systems with Westrex heads. MIXING CONSOLES—Custom designed using Weigand Audio Lab modules. From \$7,000.00. **Weigand Audio Laboratories, R.D. 3, Middleburg, Pa. 17842. Phone (717) 837-1444.**



**CATV—MATV PRODUCTS**

- CONNECTORS
- WALLPLATES
- SPLITTERS
- AMPLIFIERS

**AVA ELECTRONICS CORP.**  
416 LONG LANE, UPPER DARBY, PA. 19082  
215—MA 6 9100

EXCLUSIVELY IN USA "Satin" moving coil cartridges. Impedance matches magnetic input. M14LE (elliptical) \$99.95. M14LX (Shibata) \$129.95. Send check to **Michael-Scott Enterprises, Room 24, 6056 West Broadway, Minneapolis, Minn. 55422.**

ONE STOP FOR ALL your professional audio requirements. Bottom line oriented. **F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32505.**

DO YOU SEEK REPRESENTATION in New England States? Experienced audio representatives with wide contacts seeks additional audio lines. Highest references. Write or call **Frank Barmakian Sales, 100 Hatherly Road, Waltham, Mass. 02154. (617) 894-4849.**

## EMPLOYMENT

PROFESSIONAL RECORDING PERSONNEL SPECIALISTS. A service for employers and job seekers. Call today! **Smith's Personnel Service, 1457 Broadway, N.Y.C. 10036. Alayne Spertell 212 Wi 7-3806.**

ENGINEERING OPPORTUNITIES. One of the nation's leading Public Television and Radio Production Centers offers challenging engineering career openings. Candidates must be technically qualified and capable of quality production and state-of-the-art techniques. Send resume to **Bonnie Wells, WGBH-TV, 125 Western Avenue, Boston, Mass. 02134.**

SALES AND MARKETING MANAGER. Rapidly expanding company needs manager for sales and marketing of professional consumer, industrial, and OEM products. Related experience necessary. Please send resume to **David Blackmer, DBX, Inc., 296 Newton St., Waltham, Mass. 02154.**

## Index by Subject

### THE STUDIO—GENERAL

Automating the Audio Control Function, *Walter Jung*. Part 1, April, page 24; Part 2, May, page 26; Part 3, August/September, page 46; Part 4, November, page 30.

Automatic Tape Transport Control, *Richard Factor and Stephen Katz*. August/September, page 42.

A Combination Limiter, *Paul C. Buff*. February, page 22.

Build a Digital Readout Electronic Stopwatch, *Ralph E. Hornberger*. October, page 23.

Build a Six In, Two Out Mixer, *Larry Zide*. July, page 34.

The Digital Delay Line, *Richard Factor and Stephen Katz*. May, page 18.

How About Some Automation? *Joseph Marrone*. August/September, page 38.

Interfacing a Dolby System, *John Woram*. November, page 22.

Make a Quality Differential Microphone, *Lou Burroughs*. July, page 23.

The Midwest Acoustics Conference. Four Channels, *John Woram*. June, page 28.

Non-Standard Mic Techniques, *William Kaffenberger*. March, page 22.

On the Business of Hearing. *Marshall King*. November, page 26; December, page 15.

Recording in Four Channels, *Stephen Lampen*. June, page 31.

A Stereo Console You Can Build, *Richard Kunc*. April, page 34.

A Stereo Phase Indicator, *David Robinson*. December, page 20.

The Taming of Maxwell Hall, *William Matthews*. March, page 19.

A Wide Dynamic Range Noise-Reduction System, *David Blackmer*. August/September, page 54.

### ACOUSTICS

Make a Quality Differential Microphone, *Lou Burroughs*. July, page 23.

Non-Standard Mic Techniques, *William Kaffenberger*. March, page 22.

On the Business of Hearing, *Marshall King*. November, page 26; December, page 15.

The Taming of Maxwell Hall, *William Matthews*. March, page 19.

### BROADCASTING

For a Dime and a Boxtop, *Robert Hawkins*. March, page 26.

A Stereo Console You Can Build, *Richard Kunc*. April, page 34.

A Transmitter Control Panel, *Ellwood W. Lippencott*. May, page 24.

### EQUIPMENT

The Amplifier Power Spiral, *Norman H. Crowhurst*. July, page 26.

Automatic Tape Transport Control, *Richard Factor and Stephen Katz*. August/September, page 42.

Build a Digital Readout Electronic Stopwatch, *Ralph E. Hornberger*. October, page 23.

Circuits for Synthesizing Multi-Channel, *Robert C. Ehle*. February, page 25.

A Combination Limiter, *Paul C. Buff*. February, page 22.

The Digital Delay Line, *Richard Factor and Stephen Katz*. May, page 18.

A Four-Channel 'Scope Display, *Donald L. Patton*. June, page 24.

A Frequency Counter Meter, *Richard L. Lerner*. February, page 28.

Interfacing a Dolby System, *John Woram*. November, page 22.

Make a Quality Differential Microphone, *Lou Burroughs*. July, page 23.

A Stereo Phase Indicator, *David Robinson*. December, page 20.

A Transmitter Control Panel, *Ellwood W. Lippencott*. May, page 24.

A Wide Dynamic Range Noise-Reduction System, *David Blackmer*. August/September, page 54.

### SOUND REINFORCEMENT/AUDIO VISUAL

The Amplifier Power Spiral, *Norman H. Crowhurst*. July, page 26.

Audio Visuals Under the Stars, *Martin Dickstein*. October, page 28.

The Digital Delay Line, *Richard Factor and Stephen Katz*. May, page 18.

Make a Quality Differential Microphone, *Lou Burroughs*. July, page 23.

Non-Standard Mic Techniques, *William Kaffenberger*. March, page 22.

The Sound System of Stratford, *Robert Scales*. December, page 24.

The Taming of Maxwell Hall, *William Matthews*. March, page 19.

### PICTURE GALLERIES AND EXHIBITIONS

L.A. AES Convention Guide. April, page 20.

L.A. AES Convention—Picture Gallery. July, page 17.

N.Y. AES Convention Guide. August/September, page 62.

N.Y. AES Convention—Picture Gallery. October, page 17; November, page 18.

APRS '72 Ham Brosious, October, page 34.

## Index by Author

Blackmer, David: *A Wide Dynamic Range Noise-Reduction System*. August/September, page 54.

Brosious, Ham: *APRS '72*. October, page 34.

Buff, Paul C.: *A Combination Limiter*. February, page 22.

Burroughs, Lou: *Make a Quality Differential Microphone*. July, page 23.

Crowhurst, Norman H.: *The Amplifier Power Spiral*, July, page 26.

Crowhurst, Norman H.: *Short Run Cassette Duplicating*. January, page 24.

Dickstein, Martin: *Audio Visuals Under the Stars*. October, page 28.

Ehle, Robert C.: *Circuits for Synthesizing Multi-Channel*. February, page 25.

Factor, Richard and Katz, Stephen: *Automatic Tape Transport Control*: August/September, page 42.

Factor, Richard and Katz, Stephen: *The Digital Delay Line*. May, page 18.

Hawkins, Robert: *For a Dime and a Boxtop*. March, page 26.

Hornberger, Ralph E.: *Build a Digital Readout Electronic Stopwatch*. October, page 23.

Jung, Walter: *Automating the Audio Control Function*. Part 1, Part 2, May, page 26; Part 3, August/September, page 46; April, page 24; Part 4, November, page 30.

Kaffenberger, William: *Non-Standard Mic Techniques*. March, page 22.

King, Marshall: *On the Business of Hearing*. November, page 26; December, page 15.

Kunc, Richard: *A Stereo Console You Can Build*. April, page 34.

Lampen, Stephen: *Recording in Four Channels*. June, page 31.

Lerner, Richard L.: *A Frequency Counter Meter*. February, page 28.

Lippencott, Ellwood W.: *A Transmitter Control Panel*. May, page 24.

Marrone, Joseph: *How About Some Automation?* August/September, page 38.

Matthews, William: *The Taming of Maxwell Hall*. March, page 19.

Patten, Donald L.: *A Four-Channel 'Scope Display*. June, page 24.

Reising, James: *Q.C. for Cassette Duplication*. January, page 22.

Robinson, David: *A Stereo Phase Indicator*. December, page 20.

Scales, Robert: *The Sound of Stratford*. December, page 24.


Woram, John: *Interfacing a Dolby System*. November, page 22.

Woram, John: *The Midwest Acoustics Conference—Four Channels*. June, page 28.

Zide, Larry: *Build a Six In, Two Out Mixer*. July, page 34.

# StopClock

**A New, Accurate, Digital Timing Instrument for Recording Studios, Broadcasters, and Other Demanding Applications**

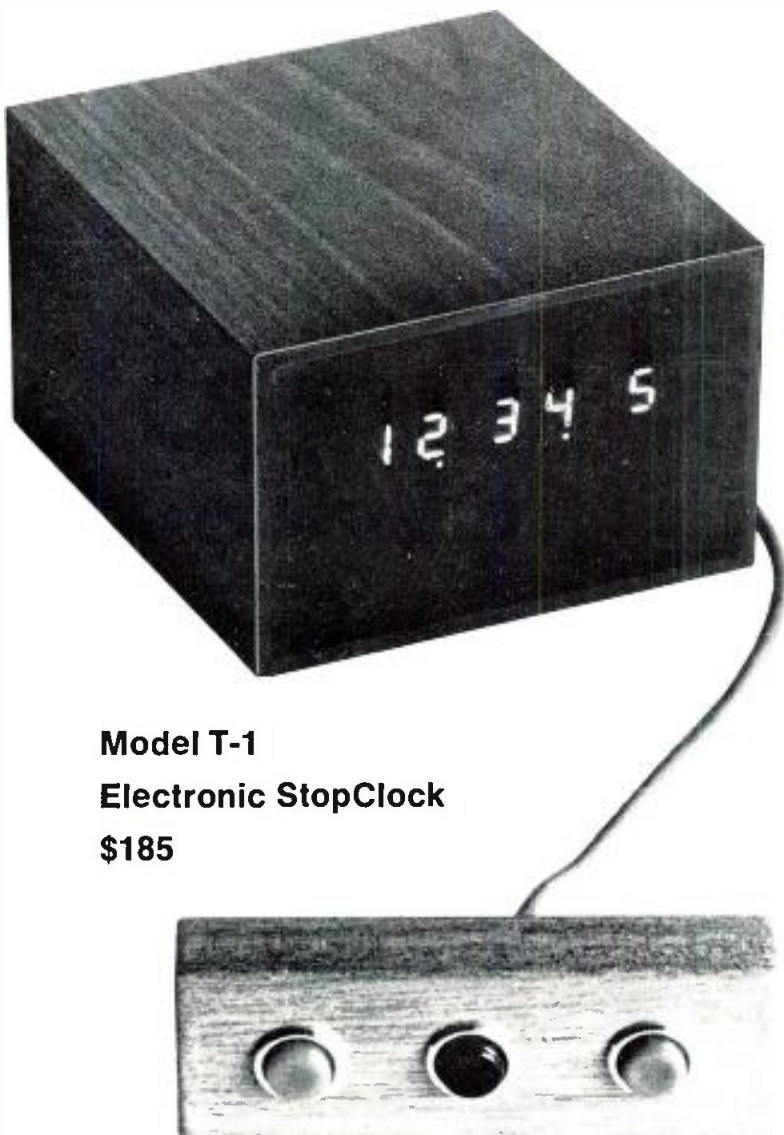

**Model T-1**  
**Electronic StopClock**  
**\$185**

Timekeeper is proud to introduce a new inexpensive *Electronic StopClock*—a compact instrument featuring an easily-read visual display.

Only 5 $\frac{1}{8}$ " wide x 3 $\frac{1}{4}$ " high x 5 $\frac{1}{2}$ " deep, it uses modern digital circuitry to provide accuracy of a very high order with exceptional long term stability. The large  $\frac{3}{8}$ " high, seven-segment numerals can easily be read from a distance of more than 15 feet. Maximum count is one hour (59:59:9).

Three remote-mounted push buttons are used for manual control: START, STOP, and RESET. These buttons may be placed in a console, operating desk or any convenient location. The clock may be remotely located in the equipment, or on a desk or table. (A mounting flange is provided.)

Operation is similar to any conventional stopwatch. The green button starts the clock; the red button stops it. The black button resets it to zero. These may be depressed in any order, or all at once, without damage to the clock. If it is desired to start the clock by releasing a button rather than depressing one, the green and black button are pressed simultaneously. When the black button is released, the clock will start automatically.

The accessory plug on the rear panel may be used for all remote operations. All BCD information is available at this plug for accessory units such as digital printers, slave units, etc.

The Model T-1 is supplied for 120 volt 60 Hz operation, in an attractive simulated walnut grained enclosure with a red lucite face. However, 120-volt 50 Hz operation is available at no extra charge if so specified at the time you place your order.

The Model T-1 is priced at \$185.00. As with all Timekeeper products, it is fully guaranteed to meet with your complete satisfaction, or your money will be promptly refunded. It is guaranteed for one year against any defects in manufacturing.

The Timekeeper Electronic StopClock is a must. More than a high quality timer—it provides the added convenience of full visual display, high accuracy and stability plus operational flexibility. Order one soon. You will be delighted with it.

## TIMEKEEPER

P.O. Box 835, Great Neck, N.Y. 11021

Please send me \_\_\_\_\_ Model T-1 Timekeeper Electronic StopClock(s) at \$185.00. N.Y.S. residents add 7% sales tax. Add \$1.00 shipping per order. I enclose \$ \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_



## The Purist's Path to Power or how to get what you pay for\*

Designed to satisfy the most exacting requirements, the Model 730 Dual 150 Watt Audio Power Amplifier offers continuous operation at full sine wave RMS power at any audio frequency. The Model 730 is equipped with isolation transformer outputs to deliver 150 watts RMS per stereo channel with instantaneous peak power output of 300 watts at speaker impedances of 4, 8, 16 ohms and 25 or 70.7 volt lines. In the mono mode, the stereo-mono switch connects Channel A input to both amplifier sections providing an average output of 300 watts RMS and 600 watts peak.

Unique "fail-safe" circuitry provides instantaneous protection against over-dissipation and damage due to load mismatch, overheating, inductive or capacitive load or short circuit. Light Emitting Diodes on the front panel indicate when overload or overtemperature status is approached. In the event of overload or improper thermal conditions, audio output continues at reduced power levels.

The unique dynamic power limiting circuit monitors

the power being delivered and automatically and instantaneously controls both current and voltage, providing complete protection and instant recovery from overload. This permits higher power levels without the audible distortion encountered in conventional amplifiers of equivalent power rating.

The Model 730 comes equipped with provision for optional plug-in input transformers for balanced lines and other applications where input circuit isolation is required. 5¼" high, 17" wide, 13" deep, the Model 730 is available with matching rack mounting brackets.

But don't take our word for it. Let the 730 speak for itself in your own surroundings. Reserve now for a two week demonstration period... and put us and the 730 to the test!

\*Transformerless power amplifiers will only deliver rated power into a single specific load, and auto transformer types have unbalanced outputs which can cause crosstalk and oscillation problems. Some amplifiers cannot deliver continuous power at all frequencies, or require special forced air cooling to achieve specified output levels. The Model 730 delivers the power you've paid for... continuously and without compromise.

 **AUTOMATED PROCESSES, INC.**  
80 MARCUS DRIVE, MELVILLE, NEW YORK 11746 - 516-694-9212

Circle 12 on Reader Service Card