

QST

DEVOTED ENTIRELY TO


AMATEUR RADIO

PUBLISHED SINCE 1915 BY THE AMERICAN RADIO RELAY LEAGUE INC.

A Double-Detection Receiver

with

**Band-Pass Filter
and
Screen-Grid Tubes**

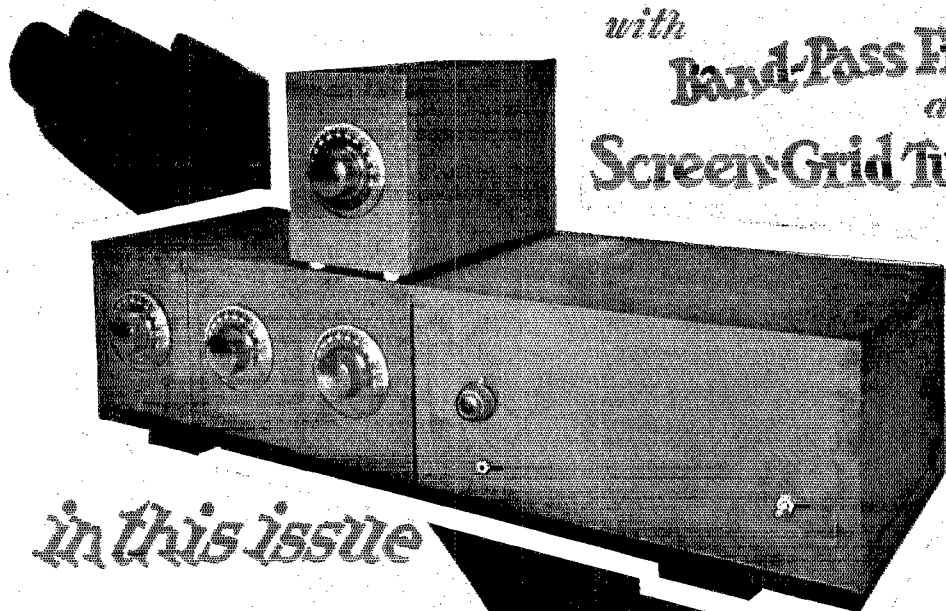


in this issue

MARCH

1928

25¢

Whoa! Radio Frequency

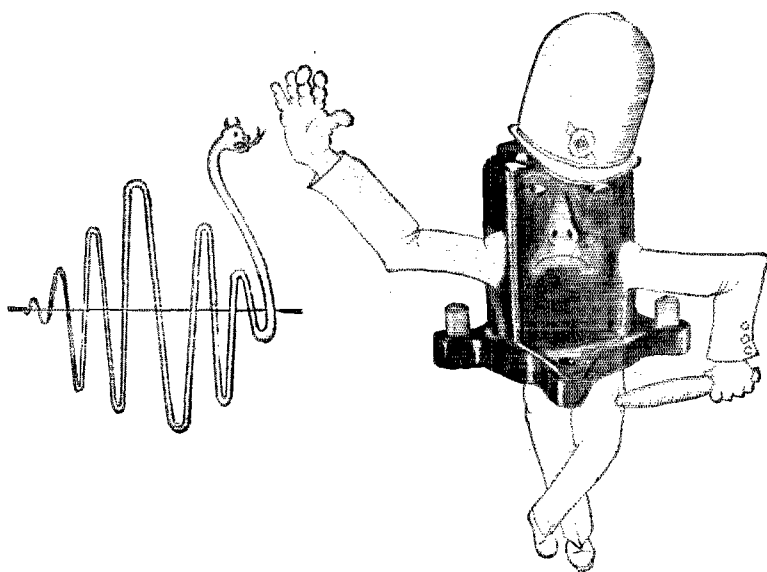

A Radio Frequency choke is useful in many of the modern short-wave transmitting circuits. It is required whenever a parallel plate circuit is used in order to prevent the plate supply circuit from forming a shunt for radio frequency current. The General Radio Type 379-T R. F. choke has an inductance of 8 millihenrys, a resistance of 34 ohms, and a continuous current rating of 200 milliamperes. Also available in a 60 millihenry size for broadcast receivers.

Type 379-T R. F. choke 8 millihenrys	\$2.00
Type 379 R. F. choke 60 millihenrys	\$2.00

GENERAL RADIO Co

Professional set builders who are unable to secure General Radio apparatus from their local jobbers are reminded that we are prepared to serve them. Write for our latest bulletin No. 929.

30 State St., Cambridge, Mass.

274 Brannan St., San Francisco, Calif.

*Whether socket power or battery operated
you'll find Faradon in the better sets*



Since 1907 Faradon experts have met electrostatic condenser needs with capacitors especially designed for each particular purpose.

There are several hundred types in routine production covering nearly all requirements. Write our engineering department for any detailed data desired for special applications.

**WIRELESS SPECIALTY
APPARATUS COMPANY**

Jamaica Plain : Boston, Mass., U. S. A.

Established 1907

*Electrostatic
Condensers
for all
purposes*

Faradon


The AERO Short Wave Receiver

SUPER-Sensitive

SUPER-Selective

SUPER-Flexible

*The Finest
Short Wave
Receiver*

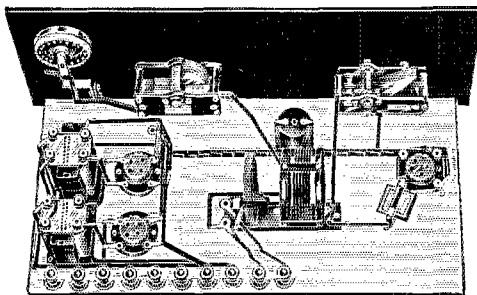

*Build It
Yourself—
Right Away!*

Superlative performance in every respect assured by carefully selected parts around which set is built

If you want a real short wave receiver—a set possessing unusually long range, fine selectivity, great power and splendid tone qualities—build the AERO SHORT WAVE RECEIVER.

This excellent receiver is neat and compact, and is flexible to an unparalleled degree. It has a normal range of 15 to 130 meters, and completely covers U. S. bands 20, 40 and 80 meters. Range can be reduced or increased if desired (see note below). Any amateur desiring the very best in short wave reception should certainly build this set.

These Parts Make Possible Its Excellent Performance

AERO PRODUCTS, Inc.

Supersensitive AERO Coils, in the form of the AERO Low Wave Tuner Kit, play a big part. This kit consists of 3 interchangeable coils. Special patented construction reduces high frequency losses to a minimum. Price of kit, \$12.50. You can lower range of set to 13 meters with AERO INT. 0, or increase range to 725 meters with AERO INT. 4 and INT. 5. These coils priced at \$4.00 each. The AERO Choke and AERO Foundation Unit are also used.

AMSCO PRODUCTS, Inc.

AMSCO Condensers are another important factor in the AERO SHORT WAVE. One .00014 condenser and one .00025 condenser are used. These list at \$2.75 and \$3.00 respectively. AMSCO parts are noted for their accuracy, dependability and fine construction.

THORDARSON ELECTRIC MFG. CO.

THORDARSON radio transformers are particularly desirable in the AERO RECEIVER. For code work the R-151 6 to 1 ratio transformers give maximum amplification at 500 cycles. For short wave reception of broadcasting type R-152 or R-200 will give excellent volume and tone quality. As used in this set, these transformers leave nothing left to be desired.

YAXLEY MFG. CO.

You'll like the outstanding quality and neat finish of the YAXLEY battery switch, resistances and rheostat. These items contribute much to this receiver's beautiful finished appearance and electrical efficiency.

BENJAMIN ELECTRIC CO.

BENJAMIN sockets insure utmost electrical efficiency. That's why they're specified in this receiver.

X-L MANUFACTURING CO.

X-L binding posts are used, of course. Neatly finished—and 100% efficient.

CARTER RADIO CO.

The products of this well-known manufacturer also contribute to the merits of this circuit.

Any or all of these specified parts are available at your radio dealers. Get them today. For literature or further information regarding the AERO SHORT WAVE RECEIVER address

AERO PRODUCTS, Inc.

Dept. 16

1772 Wilson Ave.

Chicago, Ill.

Section Communications Managers of THE COMMUNICATIONS DEPARTMENT, A. R. R. L.

Eastern Pennsylvania *SEU		ATLANTIC DIVISION		
Maryland-Delaware-District of Columbia		E. L. Maneral	1470 W. Fourth St.	Williamsport, Pa.
Southern New Jersey		Dr. H. H. Layton	805 Washington St.	Wilmington, Del.
Western New York		F. G. Raser	315 Beechwood Ave.	Trenton, N. J.
Western Pennsylvania		G. S. Taylor	598 Masten St.	Ruffalo State College
		G. L. Crossley		
		CENTRAL DIVISION		
Illinois	9AAW	W. E. Schweitzer	4264 Hazel Ave.	Chicago
Indiana	9C9Y	D. J. Augus	310 N. Illinois St.	Indianapolis
Kentucky	9ARU	D. A. Downard	116 No. Longworth Ave.	Louisville
Michigan	9CEP	Dallas Wise	9187 Falcon Ave.	Detroit
Ohio	8BYN	H. C. Storek	694 Carpenter St.	Columbus
Wisconsin	9VD	C. N. Crapo	443 Newton Ave.	Milwaukee
		DAKOTA DIVISION		
North Dakota	9EFN	G. B. Moir	618 11th Street, South	Fargo
South Dakota	9DB	F. J. Beck		Sioux Falls
North Minnesota	9EGU	C. L. Barker		Minneapolis
South Minnesota	9BYA	D. F. Cottram	3538 Third Ave. So.	Minneapolis
		DELTA DIVISION		
Arkansas	5AIP	Leonard Clippard	2408 North Pierre St.	Little Rock
Louisiana	50K	C. A. Freitag	129 Camp St.	New Orleans
Mississippi	5AKP	J. W. Gullett	1708 23rd Ave.	Meridian
Tennessee	4KM	L. K. Rush	4 Second St.	Bemis
		HUDSON DIVISION		
Eastern New York	2ADH-2AXR	Earle Peacock	Box 113	Yonkers
N. Y. C. & Long Island	2CWR	F. H. Marlon	1309 W. Farms Rd.	N. Y. C.
North New Jersey	2WR	A. G. Wester, Jr.	50 Princeton St.	Maplewood
		MIDWEST DIVISION		
Iowa	9BKV	A. W. Kruse	Rt. 6, Box 19	Akron
Kansas	9DNG	P. S. McKeever	1325 W. Campus Rd.	Lawrence
Missouri	9RR	L. B. Laizure	8010 Mercier St.	Kansas City
Nebraska	9BYG	C. B. Deihl	5665 Cedar St.	Omaha
		NEW ENGLAND DIVISION		
Connecticut	1BM	H. E. Nichols	82 Elmwood Ave.	Bridgenport
Maine	1BIG	Frederick Best	13 E. Crescent St.	Augusta
Eastern Massachusetts	1UE	E. L. Bartley	39 Royal St.	Wollaston
Western Massachusetts	1DB	A. H. Carr	30 Vassar St.	Worcester
New Hampshire	1ATJ	V. W. Hodge	227 Main St.	Claremont
Rhode Island	1BVB	D. B. Pancher	42 Summer St.	Westerly
Vermont	1AJG	C. T. Kerr		Putney
		NORTHWESTERN DIVISION		
Alaska*	7DE	L. H. Machin	Box 452	Cordova
Idaho	7ST-7ALD	Henry Fletcher	1610 N. 10th St.	Boise
Montana	7AAT-AKT	O. W. Viers		Red Lodge
Oregon	7PP	R. H. Wright	310 Ross St.	Portland
Washington	7FD	Otto Johnson	4340 50th Ave. W.	Seattle
		PACIFIC DIVISION		
Hawaii	6CFQ	F. L. Fullaway	2714 Manoa Rd.	Honolulu
Nevada	6UO	C. B. Newcombe		Yerington
Los Angeles	6AM	D. C. Wallace	109 W. Third St.	Long Beach Calif.
Santa Clara Valley	6NX	F. J. Quement	252 Chaslett Ave.	San Jose
East Bay	6ZX	P. W. Dann	1821 Chestnut St.	Berkeley
San Francisco	6VR	J. W. Patterson	1338 Fell St.	San Francisco
Sacramento Valley	6HBS	C. F. Mason	2329 N. St.	Sacramento
Arizona	6ANO	D. B. Lamb	229 W. First St.	Mesa
Philippines*	60LAT	Jose E. Jimenez	825 San Fernando St.	Manila
San Diego	6BQ	G. A. Sears	236 Bonair St.	La Jolla
		ROANOKE DIVISION		
North Carolina	4JR	R. S. Morris	413 S. Broad St.	Gastonia
Virginia	3CA	J. P. Wohlford	118 Cambridge Ave.	Roanoke
West Virginia	8HD	C. S. Hoffman	126 Chantal Court	Wheeling
		ROCKY MOUNTAIN DIVISION		
Colorado	9CAA	C. R. Stedman	1641 Albion St.	Denver
Utah-Wyoming	6RM	Don C. McRae	214 Belvedere Apts.	Salt Lake City
		SOUTHEASTERN DIVISION		
Alabama	5AJP	A. D. Trum	217 Catoma St.	Montgomery
Florida	4LK	C. E. Foulkes	502 Sparring St.	Jacksonville
Georgia-South Carolina-Cuba-Porto Rico-Isle of Pine	4KU	H. L. Reid	11 Shadowlawn Ave.	Atlanta
		WEST GULF DIVISION		
Northern Texas	5AJP	W. B. Forrest, Jr.	502 Royal St.	Waxahachie
Oklahoma	5APG	K. M. Ehret	2904 N. Robinson St.	Oklahoma City
Southern Texas	6YK	E. A. Sahn	146 N. Academy St.	New Braunfels
New Mexico	5TT	L. E. Radka		Tucumcari
		MARITIME DIVISION		
Newfoundland	8AR	Loyal Reid	Avalon House	St. Johns
New Brunswick	1EI	T. B. Lacey	620 N. B. Power Co.	St. John
Nova Scotia	1DD	W. C. Borrett	14 Sinclair St.	Dartmouth
Prince Edward Island	1BZ	F. W. Hyndman	25 Fitzroy St.	Charlottetown, P. E. I.
		ONTARIO DIVISION		
Ontario	9BJ	W. Y. Sloan	167 Close Ave.	Toronto
		QUEBEC DIVISION		
Quebec	2BE	Alex Reid	169 Logan Ave.	St. Lambert
		VANALTA DIVISION		
Alberta	4GT	A. H. Asmussen	10723 111th Ave.	Edmonton
British Columbia	5BJ	E. S. Brooks	c/o Forestry Dept.	Radio Court House, Vancouver
		PRAIRIE DIVISION		
Manitoba	4PV	D. B. Sinclair	205 Cambridge St.	Winnipeg
Saskatchewan	4FC	W. J. Pickering	514 19th St. W.	Prince Albert

*Temporary officials appointed to act until the membership of the Section concerned choose permanent
SCMs by the nomination and election.

Signaling by smoke was a favorite method of the Indians. Messages were sent long distances by means of smoke released by a blanket held over a fire.



Grebe Waited

-and now you may have

perfect light socket reception

WE know what you have been hoping for—in fact, rightly demanding of an electric set: tone—clear, true, natural, free from A-C hum; volume without distortion; ease of control; selectivity without loss of tonal fullness. No appliances of any kind to bother with.

Again and again the new Grebe A-C Six Radio has been tested until we know that it meets all requirements—that it offers perfect light-socket reception.

Like all Grebe sets it has enduring quality. There are no batteries or chargers; no outside eliminators or appliances of any kind. Just plug into the light socket and listen.

The Grebe way is to take time to be sure. During the nineteen years that we have been making radio apparatus, we have always waited to be certain that it was up to the high Grebe standard, before we placed it on the market.

Perhaps that is why Grebe sets have always been so satisfactory—why you can always “get it better with a Grebe.”

Experienced radio owners know what the name “Grebe” signifies. You, who have lately become radio interested, we urge to investigate the unsurpassed quality of Grebe reception. Hear a Grebe A-C Six. A Grebe dealer will gladly demonstrate. Send for Booklet Q.



GREBE

SYNCHROPHASE
TRADE MARK, REG. U.S. PAT. OFF.

A-C Six RADIO

Grebe Synchrophase
Seven \$135.00
Grebe Synchrophase
Five \$95.00
Grebe Natural
Speaker \$35.00
Grebe Six-Point
Speaker \$17.50

A. H. Grebe & Company, Inc., 109 West 57th Street, New York City
Factory: Richmond Hill, N. Y.

Western Branch: 443 South San Pedro Street, Los Angeles, California.
Makers of quality radio since 1909



QST



The Official Organ of the A.R.R.L.

VOLUME XV

MARCH, 1928

NUMBER 3

Editorials	7
Double-Detection Receivers with Band-Pass Filters and Screen-Grid Amplifiers	9
	<i>Wilfred Taylor</i>
Directional Properties of Transmitting and Receiving Antennae	19
	<i>J. K. Clapp and Howard A. Chinn</i>
Two Inexpensive Test Sets	32
	<i>Frank Palmer</i>
Another Code-Learning Set	33
	<i>Harold P. Westman</i>
Midwest Division Convention	34
All About the Tube-Base Receiver	35
	<i>P. H. Quinby</i>
Book Reviews	36
New England Division Convention	36
nu40C	37
"If you only try —"	41
	<i>A. L. Budlong</i>
Official Wavelength Stations	42
Radio Applied to Petroleum Prospecting	43
	<i>Gerald R. Chinski</i>
A.R.R.L. Technical Information Service Rules	46
The DX Tape Measure	47
	<i>Allen H. Babcock</i>
The Design of Variable Condensers for High Voltage Operation	49
	<i>Bert E. Smith</i>
Experimenters' Section Report	52
I.A.R.U. News	54
Calls Heard	55
Correspondence	56
The Southeastern Division Convention	70
"Ham Ads"	91
"QRA Section"	93
Index of Advertisers	94

QST is published monthly by The American Radio Relay League, Inc., at Hartford, Conn., U. S. A. Official Organ of the A.R.R.L. and the International Amateur Radio Union

Kenneth B. Warner (Secretary, A.R.R.L.),
Editor-in-Chief and Business Manager

F. Cheyney Beekley,
Managing Editor and Advertising Manager

Robert S. Kruse,
Technical Editor

Harold P. Westman,
Assistant Technical Editor

David H. Houghton,
Circulation Manager

Subscription rate in United States and Possessions, Canada, and all countries in the American Postal Union, \$2.50 per year, postpaid. Single copies, 25 cents. Foreign countries not in American Postal Union, \$3.00 per year, postpaid. Remittances should be by international postal or express money order or bank draft negotiable in the U. S. and for an equivalent amount in U. S. funds. Entered as second-class matter May 29, 1919, at the post office at Hartford, Connecticut, under the act of March 3, 1879. Acceptance for mailing at special rate of postage provided for in section 1103, Act of October 3, 1917, authorized September 9, 1922. Additional entry as second-class matter, acceptable at special rate of postage provided for above, at Springfield, Mass., authorized September 17, 1924.

Copyright 1928 by the American Radio Relay League, Inc.. Title registered at United States Patent Office.
Member of the Radio Magazine Publishers' Association.

The American Radio Relay League

The American Radio Relay League, Inc., is a non-commercial association of radio amateurs, bonded for the promotion of interest in amateur radio communication and experimentation, for the relaying of messages by radio, for the advancement of the radio art and of the public welfare, for the representation of the radio amateur in legislative matters, and for the maintenance of fraternalism and a high standard of conduct.

It is an incorporated association without capital stock, chartered under the laws of Connecticut. Its affairs are governed by a Board of Directors, elected every two years by the general membership. The officers are elected or appointed by the Directors. The League is non-commercial and no one commercially engaged in the manufacture, sale or rental of radio apparatus is eligible to membership on its board.

"Of, by and for the amateur", it numbers within its ranks practically every worth-while amateur in the world and has a history of glorious achievement as the standard-bearer in amateur affairs.

Inquiries regarding membership are solicited. A bona fide interest in amateur radio is the only essential qualification; ownership of a transmitting station and knowledge of the code are not prerequisite. Correspondence should be addressed to the Secretary.

Directors

President
HIRAM PERCY MAXIM
Drawer 2102,
Hartford, Conn.

Vice-President
CHARLES H. STEWART
St. David's, Pa.

Canadian General Manager
A. H. K. RUSSELL
5 Mail Bldg.,
Toronto, Ont.

Atlantic Division
DR. EUGENE C. WOODRUFF
234 W. Fairmount Ave.,
State College, Pa.

Central Division
CLYDE E. DARR
187 Hill Ave., Highland Park,
Detroit, Mich.

Dakota Division
C. M. JANSKY, JR.
Dept. of Elec. Eng., U. of M.,
Minneapolis, Minn.

Delta Division
BENJ. F. PAINTER
424 Hamilton Nat'l Bank Bldg.,
Chattanooga, Tenn.

Hudson Division
DR. LAWRENCE J. DUNN
480 East 19th St.,
Brooklyn, N. Y.

Midwest Division
PORTER H. QUINBY
517 Lauderman Building,
St. Louis, Mo.

New England Division
DR. ELLIOTT A. WHITE
Dartmouth College,
Hanover, N. H.

Northwestern Division
K. W. WEINGARTEN
3219 No. 24th St.,
Tacoma, Wash.

Pacific Division
ALLEN H. BABCOCK
65 Market St.,
Southern Pacific Co.,
San Francisco

Roanoke Division
W. TREDWAY GRAVELY
Box 245,
Danville, Va.

Rocky Mountain Division
PAUL M. SEGAL
c/o District Attorney
West Side Court Bldg.,
Denver, Colo.

Southeastern Division
HARRY F. DOBBS
c/o Dobbs & Wey Co.,
Atlanta, Ga.

West Gulf Division
FRANK M. CORLETT
2515 Catherine St.,
Dallas, Tex.

Officers

President HIRAM PERCY MAXIM, Hartford, Conn.
Vice-President CHAS. H. STEWART, St. David's, Pa.
Secretary KENNETH B. WARNER, Hartford, Conn.
Treasurer ARTHUR A. HEBERT, Hartford, Conn.
Communications Manager . . . F. EDWARD HANDY, Hartford, Conn.

Address General Correspondence to Executive Headquarters, Hartford, Conn.

EDITORIALS

ONE of the grandest little bits of comic radio opera in the whole history of that great art in this country occurred when the Federal Radio Commission held its short-wave hearings in Washington in middle January. It was a sight for gods and men. So many people who knew nothing about radio never before assembled in the same room to talk about it. Gather close, you folks who've been in radio long enough to know your way about, and listen to the nice bedtime story about Uncle Sammy and all the little wavelengths.

Some months ago our Commission wisely deferred action on the growing number of commercial short-wave applications until they could form an estimate of the situation. Publicity on this decision only served to augment the desire. Scores of corporations and industries suddenly became convinced that short waves were necessary to their success and happiness; that with a few hundred dollars, or at most a few thousand, they could build themselves short-wave stations like the amateurs and have unlimited free and rapid private communication, thus saving themselves tens of thousands of dollars annually in tolls to public service companies. There were millions of cycles and therefore waves for everybody. They marched on Washington to demand them at the hearings. The list of industries represented looks like the classified section of the telephone directory. At Washington these people met the interests already entrenched in radio, and the ensuing clash resounded to high heaven. Engineers of the already-established communication companies pointed out the necessity for thinking in terms of channels with definite separation between channels, of the fact that channel width increases as frequency increases; and so they found only a limited number of channels. Counting out those assigned to other services and remembering that the United States can't claim all the waves in the spectrum, these engineers arrived at the conclusion that there were available for fixed stations in this country not more than 170 short-wave channels. As every station would require from two to four different waves, the actual number of stations that could be accommodated was so small and the operating privilege so valuable that there was no hope of making any fair distribution amongst the applicants and the Government ought to confine the assignments to public service companies. Great was the indignation and

consternation at this proposal. The newcomers thought they were being tricked. They understood that there were literally tens of thousands of short-wave channels. One by one they arose to state their cases. Most of them admitted they knew nothing technically, didn't know what wavelengths they wanted but they knew they wanted some, and instead of technical statements they engaged in oratory about the public importance of their institutions. The newspapers demanded precedence over the public communication companies, on the basis that newspapers were a more important public institution; a gentleman from the movies expounded at length the great educational force that the films are and how justified they were in having some waves; labor proposed government ownership; a gentleman from the department stores explained their crying need for short waves for the remote control of computing machines (DX book-keeping) so that the boss could know the day's business promptly.

And so it went. Any amateur would have got a big kick out of the spectacle when he remembered that fateful day in 1912 when he was consigned to the wilderness of useless wavelengths below 200 meters. Then, remembering his gradual taming of shorter and shorter waves, the influx of other services, and the subdividing of the short waves into many narrow bands of which he now retains but a few, he would have been thrilled to pieces to see so many varied interests working so hard to get some of the recently-worthless wavelengths which were once exclusively his. He would know that the amateur had made this scene possible and that this great public interest in his former wavelengths was irrefutable testimony to the wisdom of this Government's policy of freely encouraging amateur radio.

Our Commission has been sadly troubled by the broadcasting problem. In taking up short waves they are about to find out what trouble really is. This is no reflection upon them—they admit they don't know much about short-waves. At the beginning of the hearings they said they had called these meetings to get help; at the end they said that they felt that only divine assistance could aid them. They made no decisions at the hearings, of course, but took everything under advisement. Up to this date no statements of policy have been issued.

These hearings gave us amateurs a splendid demonstration of the strength of our

position by virtue of being recognized in the new International Radiotelegraph Convention. Our 40- and 20-meter bands are specified as amateur, which is to say that if the treaty is ratified by our Senate, as is practically certain, these bands cannot be used for any other purpose. If it were not for this international specification, the width of our bands would be discretionary with the Commission, and in a situation where the current demand for commercial short-waves is at least ten times the available number of channels, we would run a grave risk of being clipped in the "public interest, convenience and necessity". As it is, the Commission may prohibit or restrict amateur radio if it wishes, but it can't use the wavelengths for any other purpose. We have an altogether unique position and it is already clear that it is going to be worth a great deal to us.

Thus the amateur was not primarily concerned with these hearings but the League did embrace the opportunity to get a few short-wave matters off the hook. It asked the Commission to make no reduction in the width of the amateur bands until the end of 1928; it asked that the United States interpret the shared 80- and 160-meter bands as exclusively amateur in this country, except for our old arrangement of sharing our 75-85 meter band with Army mobile stations during daylight hours in the field training season, with Naval aircraft operating off-shore, and with Naval vessels at sea working with Naval aircraft; it protested the existence of non-amateur stations working in our bands under amateur calls and asked their removal; and it filed a complaint on the interference situation created in the short-wave field by harmonics from broadcasting stations.

The Commission has a hard row to hoe. Handicapped by lack of technical radio training, their lot is all the more difficult when they find themselves in the intricacies of short waves. Their term of office is almost over. An effort is being made to extend their term another year, an effort to which, for one reason or another, there is little objection. That doesn't insure its success, however; if Congress can't get around to it by March 15th, the Commission becomes an appellate body and relinquishes active administration to the Department of

Commerce. But in either event we amateurs have reason for a sense of satisfaction in the knowledge that our specification in the new Convention will relieve us of any great worry in the present public rush for short waves.

IT becomes increasingly apparent that we amateurs are to-day in possession of operating privileges under the new International Radiotelegraph Convention largely because our American delegation could go before the Conference and say that they had had more experience with the administration of radio amateurs than any other nation, that amateurs were law-abiding, that they did not cause trouble, that they were easy to administrate. That ability to say that fine thing was what enabled them to get our privileges.

Officials of our Government have expressed to us the hope that we may continue to merit that endorsement, so that our United States officials may always be able to appear before any investigating body that is considering amateur radio and be able to make that a splendid report of their experience with us.

There are two respects in which such a statement could not be made to-day, two matters in which we are "causing trouble" and which we must clean up at once. One of these is the matter of interference with broadcast reception, which was discussed in detail in our January issue both editorially and in the Communications Department Section. The other is the question of off-wave operation, particularly below our 40-meter band, interfering with Navy operation. This latter subject was also discussed on page v of the Communications Department Section of January *QST*. Even if such off-wave operation were not an outright violation of regulations, surely the splendid friendly support we have received from the Navy Department at the International Conference entitles them to more friendly treatment at our hands than this. We should be ashamed of ourselves. Let us take immediate steps to efface these two blots on our escutcheon, in order that our Government officials may continue to be able to say that we are law-abiding, do not cause trouble, and are easy to administrate.

K. B. W.

Double-Detection Receivers With Band-Pass Filters and Screen-Grid Amplifiers

By Dr. Wilfred Taylor*


THE receiver described here suggests a combination of the high amplification of the UX-222, the desirable type of selectivity secured with a band-pass filter and the simplicity of control connected with the double-detection receiver. The reader's first reaction will be that the receiver shown here is a broadcast receiver only, and that it has too many controls. It will be shown, on the contrary, that the receiver may readily be adapted to broadcast reception (200-550 meters), to short-wave telephony, or to c.w. reception. The controls may be reduced to two, without the usual difficulty, since the first circuit does not "run out"; the usual large antenna not being necessary. In the case of the simplified forms suggested later, the problem becomes even simpler since it is necessary to gang but two controls instead of three, and in the c.w. variation suggested by Hull no ganging at all is required. Meanwhile the receiver offers certain advantages not possessed by existing types of commercial receivers.

It has become fairly common practice to use one stage of 201-A in a tuned r.f. amplifier ahead of the so-called "superheterodyne" for broadcast reception. In these cases the purpose is only partly to secure additional amplification, an equally important purpose being to prevent interference with near-by receivers by the oscillator which must necessarily be coupled to the first detector. The use of a "second harmonic oscillator" is another means to the same end but has special disadvantages of its own.

The receiver to be described here is based on an entirely different thought, which is to accomplish most of the amplification with two stages of UX-222 screen-grid tubes working at the received wavelength (that is to say, tuned r.f.) and following this with a band-pass and an intermediate frequency system; principally for the purpose of providing selectivity of a somewhat special sort. The diagram is shown in Figure 1.

One may ask why it would not have been

simpler to use the additional control for another stage of r.f. rather than to place it on the oscillator of a double-detection system. The answer to this is that three stages of *well constructed* tuned r.f. with UX-222 tubes is hardly practicable. In the broadcast band it will give an amplification *in excess of 30,000!* This amplification is so high that it is useless even with the smallest antenna because everything that is

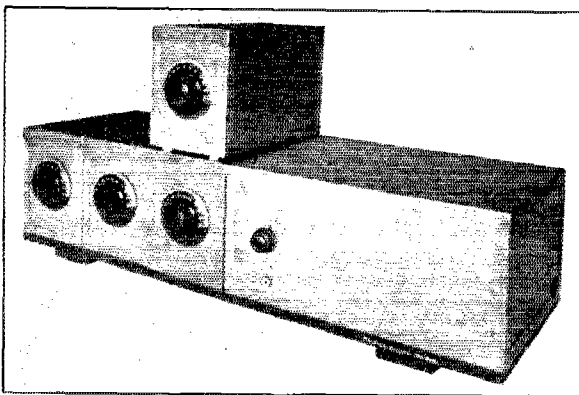

FRONT VIEW OF THE EXPERIMENTAL DOUBLE-DETECTION BROADCAST RECEIVER

From left to right the copper compartments contain: 1st r.f., 2nd r.f., 1st detector, and in the long compartment; I. F., band-pass, 2nd detector and both audio stages. The upper compartment contains the oscillator. All major stations east of the Mississippi river can be received with good strength on a 2-foot antenna and more than 20 feet of antenna are not usable at night. In spite of this the receiver is unusually quiet in operation.

encountered overloads the system. In addition, 30,000 is a degree of amplification requiring far more selectivity than is provided by the limited number of tuned circuits associated with three stages of r.f.

Two stages of good UX-222 will at all times get one down well below the noise level, and will therefore in effect lift up the background to a degree unknown in the ordinary receiver and necessitate the suppression of that background by a *kind and degree* (this distinction will be explained presently) of selectivity not normal in two or three stages of r.f. To provide that selectivity by means of mere sharp tuning is not feasible in either the r.f. or the i.f. In the r.f. position it is obviously not easily done in two stages. In the i.f. it may be possible but would inevitably result in ruining the quality by cutting side-bands;

*Marot Junior College, Dept. of Physics, Thompson, Conn.

a thing about which we hear a lot of non-sense but which *really does happen* when one is driven to extreme selectivity. This

ferent *kind* of selectivity we can obtain usually a higher *degree* of selectivity without (in telephony) cutting sidebands or (in

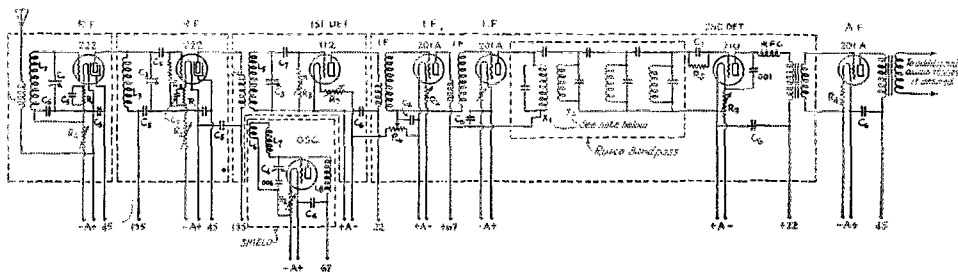


FIG. 1. DIAGRAM OF THE BROADCAST RECEIVER SHOWN IN THE PHOTOGRAPH

Several features of the diagram are due to the experimental nature of the set which has since been rebuilt. Thus the oscillator operates at 67 volts simply because it may be supplied conveniently from the box below, although 22 volts would be sufficient. The variable i.f. grid return has now been made permanent to the battery side (or minus A) of the rheostat. Separate batteries are shown in the diagram but the A battery may obviously be made common and with a little precaution as to chokes and by-passes all of the system beyond the first two tubes may easily be run from the same plate supply. The 6X-222 portion of the system requires care if the same thing is to be accomplished. See Fig. 7 for suggestions.

- L1—10 turns No. 14 to 20
- L2—56 turns No. 20 to 24
- L3—56 turns No. 20 to 24
- L4—36 turns No. 36 to 40
- L5—56 turns No. 20 to 24
- L6—3 turns No. 20 to 24
- L7—36 turns No. 22
- L8—24 turns No. 22
- L1 to L6 inclusive wound as solenoids, 3" diameter, any covering
- L7 and L8 diamond-weave on same form for oscillator

It is recommended that L3 and C5 be replaced by a pair of coils like L4 and L5. (See Fig. 5)

C1, C2, C3, C4 Cardwell type E, die-cast, tapered-plate, 500- μ fd. tuning condensers.

Points X1 and X2 are joined together via bypass condenser C6 since the A plus lead is common, being grounded to the shield.

RFC—85 millihenry choke of 200 turns small double cotton wire on $\frac{3}{4}$ " spool, 25 turn pies with cardboard separators.

- C5—.006-microfarad Sangamo.
- C6—1-microfarad Dulliber paper bypass.
- C7—250- μ fd. Sangamo.
- R1—10 ohms to give grid bias.
- R2—30-ohm rheostat.
- R3—Variable 3000 to 500,000, combination bias and gain control.
- R4—10 to 15 ohms for grid bias.
- R5—Grid leak 2 megohms.
- R6—40 ohm potentiometer (may be dropped out)


sounds very depressing; almost as if the result demanded is not possible. Fortunately this is not correct, for by going to a dif-

c.w.) causing beat-note signals to become very weak the moment they vary a little as to frequency. What is still more beautiful is that this may be done without adding a single moving part or "tunable" circuit. Figs. 1 and 2 explain this more clearly than much talk.

It, therefore follows, that what is really wanted is a band-pass filter in the intermediate frequency system where it can be made sufficiently complex (see Fig. 3) to have a sharp cut-off and at the same time *transmit a band freely* and without distortion.

To put a band-pass of the type here shown into the r.f. part of the system is out of the question because of the many tuned circuits involved.

The band-pass filter used in the following receivers is relatively an old device and one whose mathematics have been well worked out so that it is somewhat surprising that the device is not more generally used.

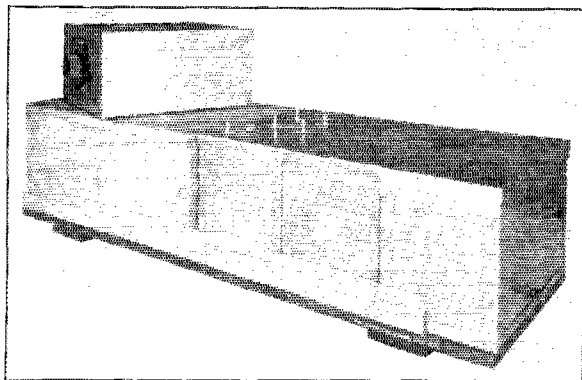

REAR VIEW OF THE SECTIONAL COPPER SHIELD SHOWING CONDUIT FOR R.F. PLATE SUPPLY

Note the oscillator box turned over to expose the 5 spring plugs, three of which supply filament and plate power while the other two carry the r.f. output to the coil L5 in the detector compartment.

The antenna post may be seen at the right end of the system.

Especially is it so, as it has long been employed in the identical manner here suggested by the Bell Telephone Laboratories.

The soundness of the idea of an approximately square-cornered cut-off with flat transmission, as opposed to a round-cornered cut-off with peaked transmission is self-evident. The only question that remains

versations, which application makes possible our present long distance communication rates. As to the practical nature of

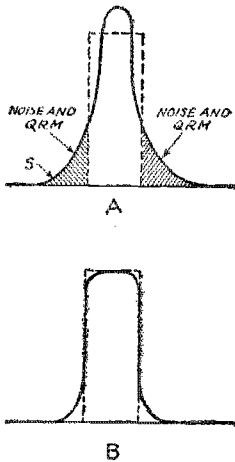


FIG. 2. DIFFERENCE BETWEEN SELECTIVITY OF BAND-PASS AND TUNED CIRCUITS

Tuned circuits give a curve like that of A. (A) Adding more circuits not only cuts down the shoulder at S which is wanted but also cuts down the corners of the desired band shown in dotted line. In telephony this spoils quality and in C. W., signals are lost easily when they swing. (B) A type of selectivity secured by band-pass showing how shoulders are cut away without cutting corners on desired signal.

is, "Can one secure this advantage in practice?" We find that many thousands of band-pass filters of one sort and another are


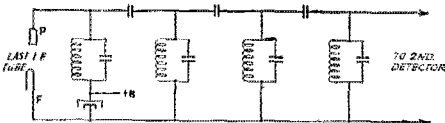


FIG. 3. SIMPLE BAND-PASS SYSTEM FOR APPROXIMATING CURVE OF FIG. 2B

More complex systems can be devised to give more perfect performance. In any case it is better to buy the system ready made.

in standard use in telephone practice at audio frequencies and at intermediate frequencies and are in fact essential for the operation of such things as the transatlantic telephone, chain broadcasting, trans-continental telephone and the use of the same wire for several telephone and telegraph con-

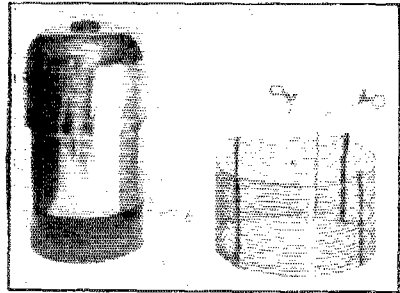

MODERN LABORATORIES ADJUSTABLE AND CUSHIONED TUBE SHIELD AND A SHORT LENGTH OF SPACE-WOUND COIL OF THE SORT USED IN THE R.F. SYSTEM.

the device, in this case one has but to consider that there exists no other scheme for pushing the background far down while allowing the radiophone signals to come through unimpaired.

For continuous wave reception one naturally needs to pass only a very narrow band so that one automatically thinks of a one or two-kilocycle band-pass. This is not practicable unless one is considering a




FIG. 4. THIS TYPE OF BAND-PASS CIRCUIT HAS BEEN APPLIED BY F. K. VREELAND TO R.F. SYSTEMS. THE WHOLE THING BEING AT THE WORKING WAVE AND TUNABLE BY GANGING C1 AND C2 AS MECHANICALLY-CONNECTED VARIABLE CONDENSERS


Even for one stage this requires somewhat careful construction and while commercially possible seems less desirable than the fixed band-pass for other construction. If properly made it functions quite a satisfactory manner, and the ambitious who intend to operate on one band only will find it of advantage.

very few stations which will always appear on the same wavelength. When hunting stations it is highly desirable to be able to hear them even when they are detuned so that the beat note is quite far up the musical scale. It is very disconcerting to use a receiver in which the signal appears suddenly with a pitch of 1000 cycles or thereabouts. The suggestion is therefore that the same sort of band-pass (i.e., 10 Kc. wide) be used since it will take off a large portion of the troublesome noisy back-

ground, which is not accomplished by the "tone selectivity" found in the normal c.w. receiver. A simplified diagram of the receiver as used for c.w. is shown in Figure 3. Adapting the screen-grid tube to the double-detection receiver presents several problems of interest. This tube does not have to be neutralized and it has an enormous amplification factor, both characteristics making it desirable as a radio frequency amplifier. Because of its great sensitivity, it responds readily to all sorts of extraneous electrical disturbances, and for this reason it *must* be most thoroughly shielded. Shielding is of course necessary for another reason, namely that the 222 is screened against *internal* feedback but the usual external feedback must be prevented. Like all sensitive pieces of apparatus, it brings in everything within range, and for this reason circuits using it will be found to tune most broadly. This latter is undesirable, and is very pronounced in the ordinary superheterodyne application.

The tube was tried first on the broadcast band with a set of standard intermediate transformers, and the results were; cross talk, tube noises and mush. I then tried impedance coupling, which was an improvement, but was far from satisfactory. Then a stage of r.f. was put ahead of the first detector, and again the

mediate amplifier I should have a working basis for something worth having. Considerable experimenting has inclined me to favor an i.f. transformer which peaks around 100 Kc., so I sent to the Rusco Sales

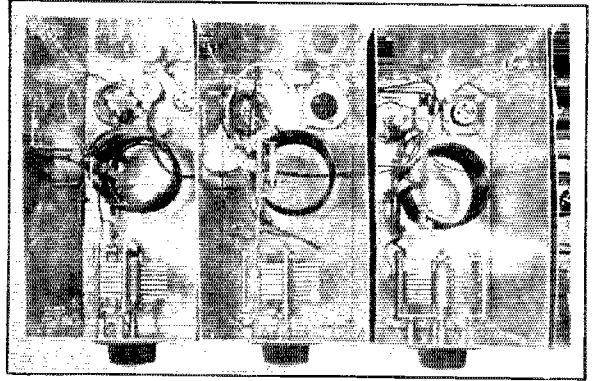


THE 2-STAGE UX-222 TUNED R.F. AMPLIFIER AND FIRST DETECTOR

The coil in the left compartment is the antenna coupler L1-L2, the center one is the tuned impedance L3 and the one at the right is the r.f. transformer.

Co. for intermediates which peak at 95 Kc., and their band-pass filter which is built to match them. As there are no B.C. stations (as yet!) just 95 Kc. apart, there is no trouble with oscillator harmonics.

A preliminary try-out with this combination; a stage of 222 ahead of the first detector and then the ordinary double-detection hook-up using the Rusco outfit, was exceedingly satisfactory. The sensitivity was remarkable, the selectivity above the average and the set was free from any kind of noises. I then tried various coils in the r.f. stage and found that a space-wound coil with a large primary of *very fine* wire wound *in the spaces between* the wires of the secondary, which was suggested by Mr. Kruse, is very much more efficient than any of the usual trap circuits. The overall impedance of this arrangement is better than anything I have seen. This is explained by Fig. 5. I then added another stage of r.f. using an impedance coil, so I could short out either stage (the first stage feeding into the second or into the third or detector coil, and the transformer coupling was much superior as evidenced by the greatly increased volume.) My micro-

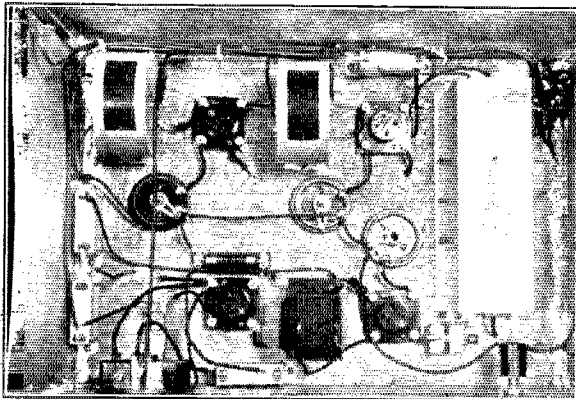

THE 2-STAGE I.F. AMPLIFIER, RUSCO BAND-PASS, 2ND DETECTOR AND AUDIO AMPLIFIER

The large rectangular metal case at the right contains the band-pass. At its forward (lower) end is the 2nd detector and at the lower left is the audio tube.

improvement was marked. It occurred to me that if I could get the advantage of the great amplification as an r.f. amplifier and block out cross talk and noise in the inter-

ammeter has just gone west, so I cannot offer any definite gain-per-stage figures. Using two stages of 222 r.f. gives terrific amplification, but with the "pot"

turned to the "plus" end and one stage detuned the set gives a clarity that is superb. As to the correctness of the band-pass action, one must of necessity quote the log. The first station tuned in was WSB, of Atlanta. Moving the oscillator dial just one mark brought in KFI with enough

therefore the metal must have sufficient mass to accomplish this thoroughly. Very thin copper is useless, and on the other hand, very thick copper is unnecessary; forty mil stock being about the limit either way. The shield should be sufficiently large to accommodate *without crowding* the various instruments. This size is largely determined by the size of the coils used, because there should be space on all sides of the coil equal to two-thirds of its diameter. Considerable experiment shows

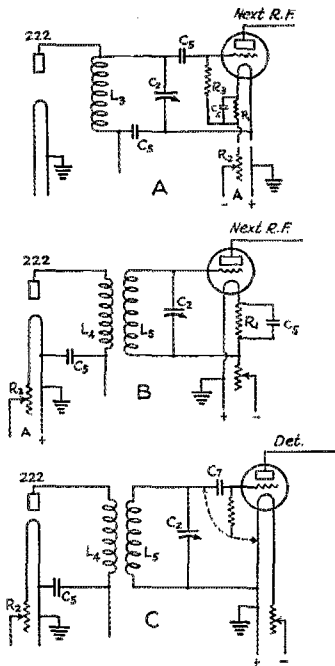



FIG. 5. COMPARISON OF R.F. TRANSFORMER AND TRAP CIRCUIT OR TUNED IMPEDANCE FOR R.F. COUPLING WITH UX-222

Numbers represent same constants as in Fig. 1, otherwise no relation. The ground connection represents the shielding. (A) Tuned impedance necessitating stopping condenser C5 in tuned circuit to avoid grounding B supply, also necessitating placing of leak R-3 direct to filament or else replacing same with resistance (or choke) and bias battery. (B) A transformer coupling permitting grounding of tuning condenser rotor and direct return of grid with less probability of grid going positive and causing partial detection. (C) Same as B but arranged for feeding detector. Alternative positions of grid leak are indicated.

volume to be heard all over the house. They did not interfere. WSB is at 630 Kc. and KFI is at 640 Kc. Again, Frank Palmer near Boston tuned in WEBH, (820 Kc.) and WDAF (810 Kc.) with a one-degree movement of the oscillator dial.

CONSTRUCTION

The shielding is of copper because its conductivity is excellent, also because it is easily worked and may be soldered. Conductivity is the principal feature in a shield,

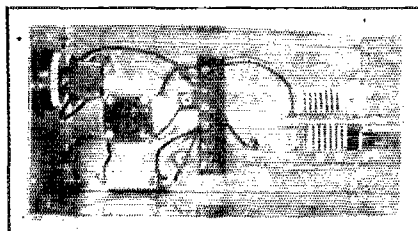

THE OSCILLATOR COMPARTMENT

The Cardwell tuning condenser supports the grid stopping condenser. At the center is a diamond-weave oscillator coil (L7 and L8) of 36 and 24 turns No. 22 on a 15 peg form with a 1 1/2" center. The socket is normally filled by a UX-112.

that a coil three inches in diameter is an optimum dimension. This means that a shield to accommodate it, its condenser, tube rheostat, etc., should be six inches wide, eight inches high, and twelve inches long. The shields shown in the photographs were made by cutting pieces 12" x 22", drawing lines eight inches from both ends and bending on these lines. The bending may be done by laying the sheet on a table which has a fairly square edge, adjusting one of the lines so that it is over the edge, clamping a rigid piece of wood over the copper on the line, and bending with a large hammer or tinsmith's mallet; this process is repeated with the other end. Pieces 6" x 8" are cut and soldered into the ends of the large piece thus making a rectangular box of the dimensions given. The edges are reinforced to secure rigidity by bolting mitered strips to them; these also give the box a finish. The lids are made in the same way.

COILS

Because of the tremendous impedance of the plate circuit of the 222 tube the ordinary radio frequency transformers will not work satisfactorily. I tried several trap (or tuned impedance) circuits and a set of hastily wound intermediates. The results were pathetic. I then wound 56 turns of No. 22 enameled wire on a split tube, tying a knot in each of four pieces of paraffin,

impregnated string between each turn. This gives a space-wound coil of excellent characteristics. I then wound thirty turns of No. 36 double-silk wire between the turns of the secondary and used this combination in the ordinary r.f. way. It is far superior to anything I have yet tried. The coils are secured to the shield (grid end up) by means of 2" brass angles, the coils being

This is an acceptor-rejector circuit consisting of impedance coils and condensers so arranged as to pass exactly 10 Kc. frequency when used with the Rusco transformers. It accomplishes this with remarkable fidelity and without suppressing the side bands requisite to purity of reproduction. It irons out all the tube noises and mush, and makes the use of the 222 a simple matter.

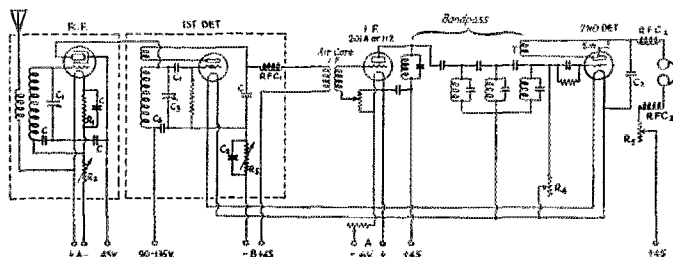


FIG. 6. THE TECHNICAL EDITOR'S SIMPLIFIED VERSION OF THE RECEIVER FOR C.W. WORK

This is in effect a modification of Westman's receiver described in the December issue; a considerable modification because it was by no means so nice a job. The I.F. amplifier was of assorted coils and condensers and too bulky to shield. It is being replaced by the Rusco device. The battery connections differ from Westman's in that the 222 is run from a separate A battery and plate battery, though the screen-grid is tied to the same 45-volt battery which supplied the detector and i.f. amplifier. Curiously enough this has made no trouble, and neither has running the audio amplifier from the same battery. This seems the more peculiar since a previous arrangement like that of Westman's required independent B batteries or filtering of leads after Bourne's style. The dotted boxes represent the limits of the individual shields. Hull's receiver simplifies this by using a 222 in the I.F. and dropping the T.R.F.

C—6,000 μ fd. (.006 μ fd.)

C1—100 μ fd. (.0001 μ fd.)

C2—.1 μ fd.

C3—General Radio "midget" 50 μ fd. variable condenser.

C4—1 μ d.

RFC1 Chokes after Lidbury's specifications.

RFC2 Secondary of Ford spark coil (Model T)

R1—10 ohm fixed resistor

R2—12 ohm rheostat

R3—6 ohm rheostat

R4—500,000 ohm rheostat (Frost)

R5—50,000 ohm rheostat (Frost)

The I.F. control is by means of a potentiometer so that one may use the I.F. oscillating if desired—it compared badly with an oscillating 2nd detector.

The 2nd detector tickler T was coupled back to the last band-pass coil, probably not the best way of doing the thing.

R4 is adjusted to secure apparent proper filter (band-pass) action and R5 controls oscillations of the 2nd detector, whose tickler may be shorted by switch Sw.

held by strips of bakelite $\frac{1}{2}$ "x7" bolted together as a clamp. The oscillator coil is a diamond-weave affair which gives excellent results and has little field. Three turns of No. 22 enameled wire are clamped in the grid end of the detector coil and connected to the grid coil of the oscillator (in series with the grid coil and the minus A battery side of rheostat). The setting of this rheostat is critical. Instead of putting the oscillator between the first detector and the i.f. amplifier as is usual, I have put it on top of the detector shield so that it is directly connected and none of its wires runs through any other compartment. This is done by using General Radio plugs and jacks.

The i.f. amplifier does not present any unusual features except the band-pass filter.

In the r.f. stages, the sockets are arranged to shield the tubes. This is done by cutting a square of bakelite the size of the socket base, cutting a copper disc to cover it, and bolting both together with the socket to the shield underneath. A tube shield put out by the Modern Laboratories (Owosso, Mich.) is revamped by putting a bakelite bushing in its top to fit the grid terminal of the 222, and this is slipped over the tube, its bottom resting on the grounded disc. This is *not* a foolish refinement! The tube *will* oscillate if it is not done.

The plate supply for the r.f. tubes is brought from the batteries through a copper trough screwed to the back of the shields; this also acts as a bond between the shields, the whole being soldered to A+ and grounded.

Possibly, the most important thing in the whole arrangement is the bias of the r.f. tubes. Using the Kruse (?) transformer,

A variety of things have been tried since the original story was written and the photographs made. It has been found that in

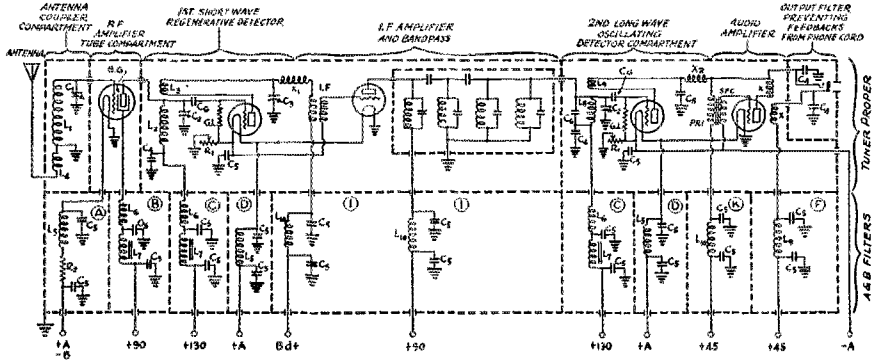


FIG. 7. A SUGGESTED ADAPTION OF R. B. BOURNE'S SHIELDED C.W. RECEIVER BY THE ADDITION OF AN I.F. AMPLIFIER, BAND-PASS AND 2ND OSCILLATING DETECTOR

The heavy dashed line is the copper shielding. In this shielding the upper row of compartments contains the receiver proper while the lower row contains the filters in the different battery lines to prevent interaction between tubes, also to cut down body capacity effects. An additional filter is found in the upper right compartment. It is connected into the output to the headset to prevent capacity effects from the phone cord. In the actual receiver the "tuner" row of compartments is at the front and the "filter" row is not under the receiver but behind it. Coil dimensions are given in the text of the original article in the December issue, except for L8, L9, X1 and X2, which are given below. The performance of such a receiver will probably not differ greatly from the original except in being quieter in a noisy location and being a little less dependent on the adjustment of C3.

L4 and L1—Antenna coupler or input tuner.

L2 and C2—Tuned circuit acting as plate reactance for the r.f. tube and producing r.f. voltage drop which is fed through the condenser Cg to the detector grid. L2 and C2 thereafter also act as tuned grid circuit for the detector.

L3 and C3—tickler and regeneration control for first detector.

C4—Insulating condensers separating L2 and phone jack from shield to avoid ground on 130- and 45-volt B battery.

AFT—Audio frequency transformer feeding audio amplifier.

X—R.F. chokes separating audio amplifier from detector phones.

X1—R.F. choke separating 1st detector and i.f., ordinary choke suited to working wave.

X2—1000-turn honeycomb coil used as choke to keep i.f. from audio amplifier.

C1—Tuning condenser suited to range and to beliefs of set builder.

C2—Any convenient V.C. (250 μfds suggested) which will go to 1000 μfds when shunted by mica condenser C6 as shown. System must tune to i.f., (95 Kc. assumed, therefore about 3150 meters). Do not trust markings on small mica condensers but test range to be sure it is right.

R2—Resistance to lower battery voltage to proper value for the odd filament of the UX-222.

C5—Paper filter condensers.

L5—R.f. filter chokes (Air core).

L7—A.f. filter chokes (Iron core).

L8—300-turn honeycomb or duolateral coil.

L9—150-turn honeycomb or duolateral coil as tickler. Strength of oscillations set permanently by adjusting position of L9 or resistance control may be provided below the filter in compartment K.

L10 in compartments I and K depends somewhat on the i.f. used. 1000-turn honey comb coils are O.K., also ordinary Ford Spark coil secondaries are suitable.

the biasing is a simple matter; a variable resistor in the grid return. Using an impedance coil the usual dry leak bias is very inefficient; a single dry cell may be used, but a variable 2000-ohm resistor in the grid return is probably better. This is clarified by Fig. 5.

This is merely a preliminary investigation. Many improvements are yet to be made.

the broadcast band there is some advantage in using two stages of r.f. amplification. Also, that the three lower controls (input circuits of the r.f. tubes and the first detector) should run amply close together to permit ganging.

PERFORMANCE

There is no intention here of pointing out the obvious mechanical methods by which

ganging and other commercial simplifications can be accomplished. Before proceeding to the suggested variations of the receiver it may be well to say something of the performance of the broadcast receiver just as it stands.

Two feet of lamp cord attached to the antenna post brought in all the more prominent stations east of the Mississippi River

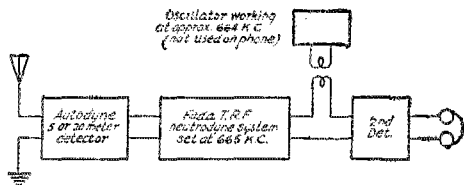


FIG. 8. A SIMPLE WAY TO MAKE UP A TEMPORARY SHORT-WAVE C.W. OR PHONE RECEIVER OF GOOD SENSITIVITY

The short-wave autodyne detector feeds into a neutrodyne system (shielded if possible as in this case), whose output goes to a 2nd detector, possibly the one in the set. An oscillating 2nd detector or a heterodyne is necessary to make a beat note but most signals can be copied on the modulation and for phone it is as well to work purely non-regenerative. As a phone receiver this is a makeshift but for c.w. is not at all bad.

with ample intensity. 20 feet of wire is enough for all ordinary reception and the usual out-door antenna cannot be used except for daylight reception.

SHORT-WAVE RADIOPHONE VARIATIONS

For short-wave radiophone reception it has been customary to use a regenerative detector and audio amplifier which is not at all satisfactory. This has been done largely because the 201-A is a very poor radio frequency amplifier at short waves (roughly, those below 60 meters). The alternatives are of course; (a), to do the radio frequency amplifying with a UX-222 ahead of a non-regenerative detector, followed by an audio amplifier; or (b), to secure more quiet operation by working the UX-222 into an intermediate frequency amplifier in the manner suggested for the broadcast receiver and, (c) to operate through a first detector and oscillator (without previous amplification) into an i.f. amplifier employing either 201-A or UX-222 tube (or tubes).

System a is satisfactory excepting as to selectivity. There is no opportunity to improve the signal/noise ratio.

System b is the one which has been under discussion and which obviously can be applied to short-wave telephony by changing the size of the tuning coils and condensers. One stage of UX-222 radio frequency amplification can be dropped from the front of the system to decrease the difficulty of

the relatively sharp tuning at short waves and the necessary selectivity will still be obtained by means of the bandpass as before. The extent to which the device helps the signal/noise ratio must be heard to be appreciated.

System c appears to be a perfectly practical one and with standard tubes has done excellent work. (See QST, Jan. 1927, p. 40

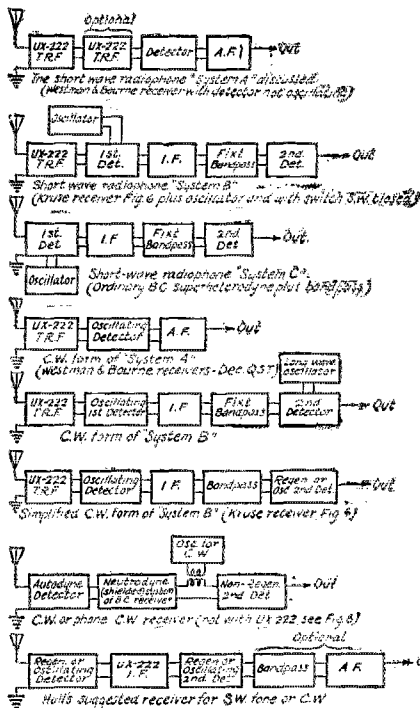


FIG. 9. THE VARIOUS RECEIVER SYSTEMS DISCUSSED

and Feb. 1928, p. 41.) But no first hand information on its operation with the UX-222 is at hand.

C.w. variations of system b are shown in Figs. 6 & 7, the labels of which explain them satisfactorily.

C. W. RECEPTION

For C.w. reception, several possible simplifications are possible. Since one does not want such a high output (headset instead of loudspeaker) one stage of UX-222 r.f. amplifier may be spared in the interest of speed in tuning. Since there is no sideband reproduction to worry about, the heterodyne oscillator can be dropped in

(Continued on Page 31)

Directional Properties of Transmitting and Receiving Antennae*


By J. K. Clapp and Howard A. Chinn**

No short-wave transmitting or receiving amateur can afford to miss this article.—Technical Editor.

A DIRECTIONAL transmitting system is usually thought of as an antenna arrangement which directs a beam of radiation in a given direction in a horizontal plane, or over the earth's surface at the transmitter. The more general definition, however, requires the consideration of antennae having directional properties either in the horizontal plane, the vertical plane or in both and it is from this viewpoint that the various antenna mentioned in this paper are discussed. It should also be kept in mind that the directional properties are equally effective whether the antennae are used for *transmission* or *reception*.

A single wire vertical antenna, when placed over a perfectly conducting earth and away from all objects that might have an influence upon its natural directional properties, will transmit equally well in all directions in the horizontal plane. That is, it will transmit to the north just as well as to the south, or west, or any other direction. In a practical case it has been found that the energy distribution in the horizontal plane is not always of this simple non-directional character as pictured in Fig. 34a, but may be distorted as shown in Fig. 34b. This shows the approximate distribution of energy of a single vertical wire antenna that was erected at 1XV Round Hills, Massachusetts, midway between two steel towers that were 120 feet high and separated by a distance that corresponds to very nearly one wavelength at 38 meters. It is seen that transmission in the line of towers has been materially decreased and therefore in the actual case the transmission was not equally good in all directions. The distortion of the energy distribution curve is caused by radiation from the towers, which act as antennae. The currents in the towers are practically in phase with the current in the antenna wire midway between them. The result is

that the effective radiation in a direction along the line of the towers is decreased, while in a direction at right angles to the line of the towers it is increased. The angle which most of the radiated energy makes with the earth depends upon the height of the antenna above the earth, the

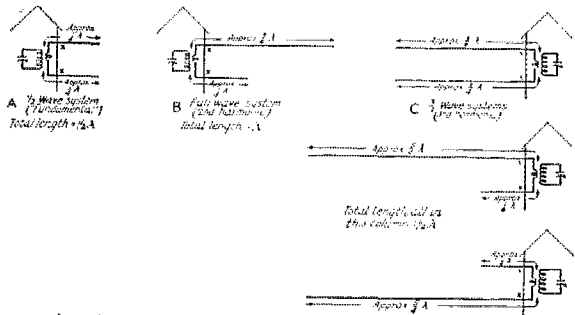

NOTE - Losses tend to be high at points X unless they are near voltage node. Antenna forms shown are general and outside parts may be slanting or vertical.

Fig. 1.—The usual amateur antenna for transmission is a straight or bent Hertzian antenna, usually called an "antenna-counterpoise system", with more or less of some low-voltage part of the system brought into the station for coupling to the set. Usually the system does not include much loaded.

For transmission to particular points or to overcome a bad location it is desirable to consider replacing such a simple system by one of the various types described later. The "approximate" lengths are given only to suggest which low-voltage point is in the station. The important thing is the overall length.

character of the earth and the length of the antenna wire.

In the study of horizontal antennae it is found that the energy distribution in a horizontal plane is not symmetrical with respect to a perpendicular at the center of the antenna system, but that most of the energy is radiated at right angles to the antenna and therefore transmission is usually found to be best in this direction.

The energy distribution in a vertical plane depends on the character of the earth, the height of the horizontal wire above earth, the length of the wire and the direction which the antenna makes with the plane considered. At certain heights, i.e., 0, $\lambda/2$, λ etc., the vertical radiation is zero, while at other heights, $\lambda/4$, $3\lambda/4$ etc., the vertical radiation is a maximum.

Multiple antenna systems which direct a beam of energy in a given direction over

*Contribution from Colonel E. H. R. Green Research. * Electrical Communication Laboratory, Massachusetts Institute of Technology, Cambridge, A. Massachusetts.

the earth's surface are readily arranged, and at wavelengths of forty meters or less they do not present any great mechanical difficulties in construction. They do not require an unreasonable amount of space unless it is desired to construct a system




FIG. 2. THE SIMPLEST METHOD OF REMOVING THE ANTENNA FROM THE STATION IS TO FEED IT THROUGH A 1-WIRE FEEDER OR TRANSMISSION LINE

The antenna may be bent as shown or straight, as is quite common. The feeder length is usually about 1/10 wavelength unless series L or C be used. The defects of this method of voltage feed are discussed in the text.

producing an extremely well-defined beam.

Systems consisting of a number of vertical wires in the same plane, properly spaced and so excited that the currents

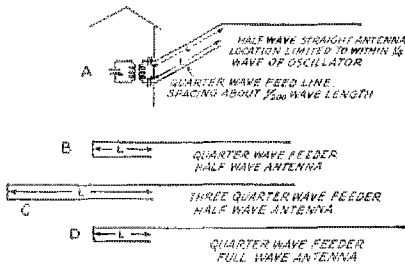


FIG. 3. VOLTAGE FEED BY MEANS OF A NON-RADIATING 2-WIRE LINE

If vibration of the type shown in Fig. 5 is prevented as suggested in Fig. 6 or by stiff conductors this method has advantages over the one of Fig. 2.

are in phase, have very marked directional properties providing the dimensions of the system are large compared with the wavelength. Even if the dimensions of the system are of the same order as the wavelength, the directional properties are quite noticeable and well worth the consideration of the progressive amateur.

THE WORK AT 1XV AND 1BYX

In order to contrast the theoretical with the actual directional properties of the various antenna arrangements that are discussed, many of the systems have been erected and tested during the past two years at Round Hills (1XV) and Auburn-dale (1BYX) both in Massachusetts.

The first type of antenna investigated

was the usual "antenna-counterpoise" system, which is extensively used by amateurs. This type of antenna is also known as the "quarter-wave transmission line type" or bent Hertzian antenna, and consists simply of two wires, about a quarter of a wavelength in length, one above the other and separated by six to twenty feet or more. This antenna is shown in Fig. 1A and for simplicity the usual antenna and counterpoise condensers have been omitted from the sketch. The antenna is

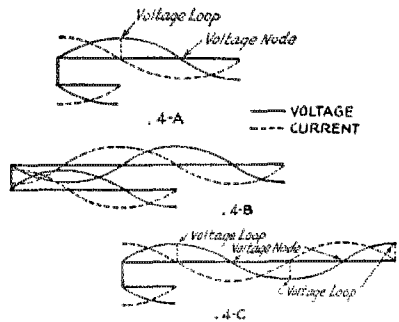


FIG. 4. VOLTAGE DISTRIBUTION AND CURRENT DISTRIBUTION FOR THE SYSTEMS OF FIG. 3

fairly effective but has two disadvantages. The first is that the wires connecting the two antenna wires must generally be brought within the station building thereby introducing undesirable losses into the antenna system because of the walls of the building. The second is that the structure cannot be elevated appreciably above surrounding objects because the dimensions would then become too great for satisfactory operation at the desired wavelength. This latter objection is overcome to a certain extent by the single-wire-transmission-line type of feeder, (Fig. 2) which permits the placing of the antenna circuit proper at nearly any desired location, energy being



FIG. 5. INCORRECT STRUCTURE LEADING TO VIBRATIONS OF WIRES RELATIVE TO EACH OTHER

transferred from the transmitting oscillator via the single transmission line and the capacitance of the antenna system to ground.¹ The method just outlined is not

1. Methods of laying out and adjusting such a system are given in detail on page 11, July 1926. (L. G. Windom.)—Tech. Ed.

simple in adjustment and the antenna system is in itself practically a fixed wavelength arrangement, resulting in a marked lack of flexibility, when properly operated. Many stations using this system unknowingly operate the feed-line as a lead-in, using the entire structure as an antenna, which is far from desirable. It should be realized that the antenna of Fig. 2 is exact-




FIG. 6. CORRECTION OF FIG. 5 BY USE OF LIGHT SPACERS

Wires do not swing relative to each other, but together. Stiff conductors will also effect a curve.

ly equivalent to that of Fig. 1 with the exception that in one case the energy is brought to the antenna through a feed wire while in the other case it is coupled directly into the system. Inasmuch as the losses of a feeder system can usually be made less than those of a coupled-antenna arrangement it has been found advisable to employ some form of feeder arrangement whenever feasible.²

The second type of antenna consists of a two-wire transmission line feeding a straight wire (Fig. 3) which acts as the antenna system (sometimes referred to as the "Zeppelin" antenna since it was first suggested to be hung from dirigible balloons). The antenna wire is cut to one-half of the desired wavelength³ in length and

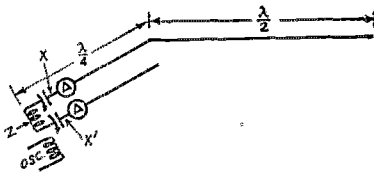


FIG. 7. THE INPUT END OF THE 2-WIRE VOLTAGE-FEED SYSTEM OF FIGS. 3-6

may be placed in any location or position, as desired, or as may be dictated by local conditions at the transmitter. The two-wire transmission line is preferably one-quarter wavelength long, but may be made

2. The length to which antenna system is to be cut may be determined from p. 46, May, 1926. (J. M. C. + H. P. W.) or from p. 30, August, 1926. (Benjamin S. Melton).—Tech. Ed.

3. The wavelength in meters multiplied by 3.28 gives the wavelength in feet. For instance; a 40-meter, half-wave antenna would be $\frac{1}{2} \times 40 \times 3.28 = 65.6$ feet long.—Authors.

any odd number of quarter wavelengths with essentially the same results. It must be realized, however, that this two-wire feeder cannot be any length that is convenient but *must bear a definite relation to the designed operating wavelength of the antenna.*⁴ The reason for this is clearly evident upon consideration of the voltage and current distribution on the line as illustrated in Fig. 4. The case of the quarter-wave feeder and half-wave antenna is shown in Fig. 4a. The antenna and feeder are shown in a horizontal position but it is realized that the antenna may be placed in any position at all and the feeder bent in whatever manner is necessary to reach the driving oscillator. The feeder wires may be brought around corners, placed in a horizontal or vertical plane or arranged in any other way desired. From the figure it is seen that the half-wave antenna is operated in the usual manner with a current loop at the center and voltage loops at the ends. The system is so arranged that the currents in the feeders are exactly out of phase and therefore *the radiation from the feeder is practically zero.* Tests on a carefully adjusted system have verified these conclusions. The current and voltage dis-




FIG. 8. ONE FORM OF A TWO-WIRE VOLTAGE-FEED SYSTEM

The feeder wires in this case are each one-quarter wavelength long, or even multiple of that length.


Many variations are possible, especially as to the apparatus at the top of the feeder and the form of the antenna, which may be bent like that of Fig. 2 or in any other manner desired. In place of the coil shown at the top of the feeder line a condenser or a more complex system may be used, or finally the line may be left open (nothing connected across) and simply connected to the two sides of the antenna. It is not discussed here because it has previously been covered in QST, also because the authors are not convinced of its desirability in view of the rather poor match between the antenna and line impedances. The same disadvantage does not apply to the system here shown or the other arrangements using such adapting devices as have just been suggested.

tribution curves for the three-quarter wave feeder and half-wave antenna are shown in Fig. 4b and for the quarter-wave feeder, full-wave antenna in Fig. 4c. It is quite apparent from these figures that the feeder *must* be a quarter-wave long or an odd multiple thereof.⁴

4. The same restriction does not apply to methods where the line terminates in special apparatus, as will be shown later. These methods usually relate to current feed of the antenna, rather than voltage feed.—Tech. Ed.



At the oscillator end of the transmission line, adjustable coupling may be provided in the form of a coupling coil and a variable condenser either in series or parallel with the coil, so that the voltage loop appearing near the far end of the transmission line may be shifted along the line in order that a maximum voltage may be impressed upon the antenna system. This arrangement has the advantage that the radiation of a two-wire transmission line (Fig. 3) is practically nil, as compared to the relatively large radiation that exists from a single-

tion from one wire practically neutralizes that of the other and we have very little resultant radiation. It is found that 85 percent of the energy is confined about the wires within a circle whose diameter is equal to four times the separation of the wires. Therefore, with this arrangement we are certain that practically all our radiation is coming from our antenna proper. The two-wire transmission line has the further advantages that there is no need of carefully determining the point at which the feeder is attached to the antenna, it being placed at a point corresponding to a voltage loop;⁵ it is more flexible and is easier to adjust than the single-wire transmission line system; the antenna structure is cut to exact dimensions determined by the wavelength desired—no empirical constants need to be used and the losses caused by the feeders going through the wall are a minimum since a voltage node

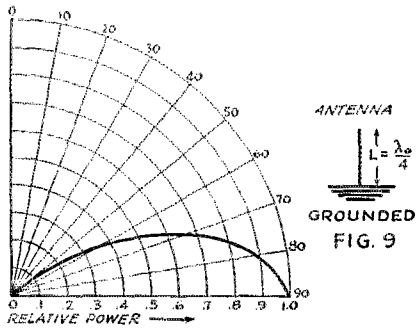

wire feeder which really acts as an ordinary antenna.

In the case of the single-wire feeder which is short compared with the wavelength, the current distribution is practically uni-

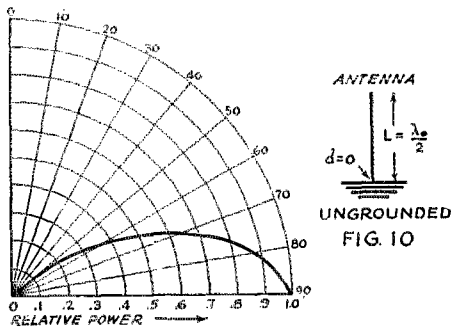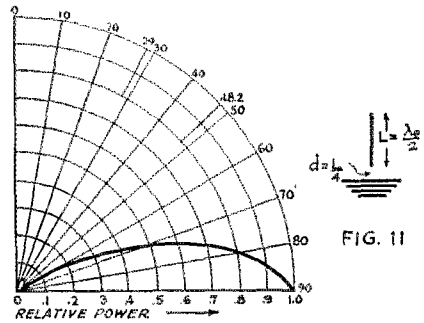

form along the entire length of the feeder and it radiates just as much as the portion which is usually thought of as the antenna proper. If the single-wire feeder is long compared to the wavelength standing waves are set up on the line, just as they are on the antenna itself, and the entire system acts as a radiator. When using the two-wire transmission line, the radia-

(mentioned in more detail below) exists on the transmission line at this point. From Fig. 4 we see that a current loop occurs at the tuning condensers when the system is properly adjusted and therefore if we place an ammeter at this point we have a means of determining the proper adjustment.

Various antenna systems as described were constructed at the experimental station 1XV at Round Hills, and many adjustments of the antenna wires and feeders made, the resulting antenna current being observed at the center of the antenna and at the transmitter end of the transmission line. Particular tests were made on feeder lines one-quarter and three-quarter wavelengths long in an effort to determine the possible effect of attenuation along the transmission line. No observable difference in antenna current was noted for the two lengths of the transmission line, indicating that if attenuation takes place on the line, it is of no practical importance

5. See Fig. 4 for location of the voltage loops.—Authors.

insofar as building up a reasonable amount of current in the antenna wire is concerned. The effect of a change in spacing of the transmission line wires was also found to have little influence upon the antenna current. Spacings varying from 6 to 24 inches were used.

In the construction of two-wire transmission lines extreme care must be taken that the individual wires do not tend to swing, relative to one another. If glass

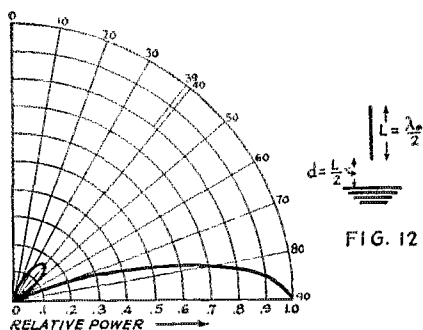


FIG. 12

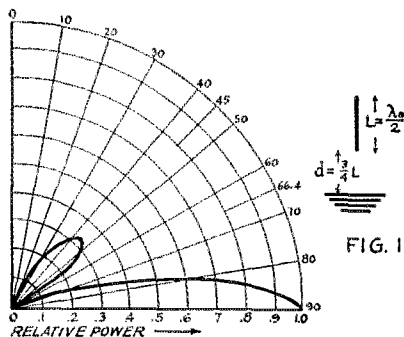


FIG. 13

is, if the antenna was cut one-half wavelength long, the feeder one-quarter wavelength or odd multiple thereof, then with a balanced nodal point, very good performance was obtained at the calculated wavelength. A considerable latitude is experienced in the wavelength at which the system operates well, a variation of wavelength of 10%, above or below the designed wavelength having been found possible with practical antenna efficiency.

A test for the location of the voltage node

tooth-brush holders are used for separators it will be found that the wires will swing relative to each other and the heavy separators will remain stationary, see Fig. 5. This will cause detuning and resultant swinging of the transmitted signals. To overcome this, separation made of 3/8-inch woden dowels, boiled in paraffin has been used and it has been found that the feeder swings as a unit, (Fig. 6) and as a result the spacing between wires does not change, and the signals are steady even in the high winds that have been encountered along the Atlantic coast.

In* these systems, it is very convenient from a practical viewpoint, to be able to cut the antenna and feeder wires to the correct length with the assurance that good performance will be obtained at the desired wavelength. At first, it seemed that no definite relationship could be predicted between the length to which the wire was cut and the wavelength of best operation of the antenna when installed. Later developments showed that most of the discrepancy was due to a shifting voltage nodal point at the transmitter end of the transmission line, with varying adjustments of the antenna and transmitting circuits. By arranging a variable condenser in each of the feed lines, the position of the node could be readily controlled, and if it were brought to the midpoint of the coupling inductance, the results obtained with the antenna system were closely predictable from the dimensions of the system. That

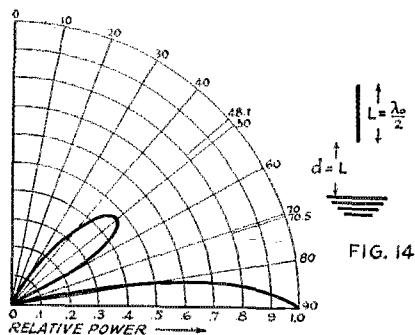


FIG. 14

on the antenna tuning coil or along the transmission line is easily made by touching a screw driver, or other insulated piece of metal, to the various turns of the coil or along the wire. At the node no spark will be obtained.

If the feed line is slightly less than a quarter-wavelength long, then the point of maximum voltage may be moved along the line by shunting a small condenser across the oscillator end of the transmission line. The addition of this small capacitance brings the maximum voltage point "in over the end of the line". Proper adjustment of the condenser permits an increase of antenna current, with short feeder line, of as much as 10 percent. If the line is slightly

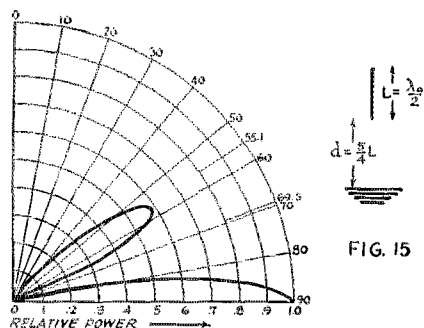


FIG. 15

more than one-quarter wavelength long, the shunt capacitance is not used, the necessary adjustments being made by means of the two series condensers whose purpose is to balance the nodal point. The flexibility thus obtained is such that very good operation may be obtained even though the transmission line is slightly different in length as compared with the desired quarter wavelength.

The arrangement that has been found most satisfactory for voltage feed is shown in Fig. 7. The values of the condensers, and inductance should be such that if the system were shorted at XX' the closed circuit consisting of the tuning condensers and the antenna inductance would tune to the operating wavelength. Tests for voltage nodes should be made at the points X, X', and Z and the condensers adjusted until nodes appear at these points. When this adjustment is obtained it will be found possible to place the fingers between the points X and X' (there being no voltage to cause a burn) without affecting the operation or frequency of the transmitter in any way. The above remarks apply equally well to the case of a three-quarter wavelength transmission line.

In the experiments carried out, the current-feed system was tried only to the extent necessary to establish the fact that it would operate the antenna in the same manner as the voltage-feed system described. *There is no particular reason why one system should have any advantage over the other, when both are used at their optimum adjustments.* The arrangement used is indicated in Fig. 8, half-wave feeder being used to obtain a maximum current at the antenna loading coil.⁶ The reactance drop in the coil is impressed at

6. By making special provisions for matching the line to the loads at both ends this limitation may be avoided. One method of doing this is described on page 43, January, 1928. (Walter Van B. Roberts.)—Tech. Ed.

the center of the antenna system and the antenna current being measured just 'out-

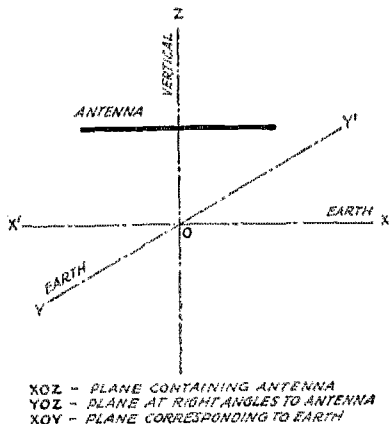


FIG. 16. DIAGRAM TO EXPLAIN APPLICATION OF CURVES OF FIGS. 9-15 TO HORIZONTAL ANTENNAS

side" of the loading coil. With proper adjustment the antenna current was found to be exactly the same as that obtained with the voltage-feed system, but from an operating standpoint, this system is not so desirable as the voltage-feed system because of the necessity of placing a coil or a condenser at the center of the antenna, so that the latter system was employed in all later experiments.

These systems of exciting the antenna

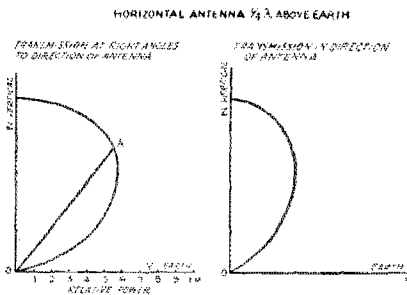


FIG. 17

lend themselves very well to the excitation of two or more antennae, with the maintenance of definite phase relationships between the currents in the various antennae, and are therefore of great value when constructing a directional antenna system.

As transmission by short waves is be-

lieved to be largely dependent upon the bending of the waves in the upper regions of the atmosphere for transmission over great distances, it would appear to be very advantageous to utilize a directive system

tenna in the vertical plane should be such as to give as intense radiation as possible at the angles which are most suitable for such transmission; for short distances the antenna should radiate most intensely at relatively high angles, of the order of 45 to 70 degrees. Recent experimental results due to Meissner in Germany indicate that very high angle radiation may play a very important role in long distance communication. Transmission from Nauen to Argentina has been maintained on 11 meters, using reflectors sending the main beam of radiation up at angles of from 30 to 80 degrees from the horizontal at the transmitter. *Horizontal antennae would play an important part in amateur radio if transmission by high-angle radiation is to be followed.*

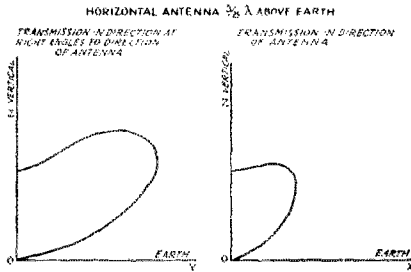


FIG. 18

such that the maximum intensity of radiation is obtained in a direction favorable for refraction in the upper atmosphere. Practical operating results indicate that for a transmitter to be effective at great distances on short wavelengths, the antenna system employed must be of such a type as to have a strong component of radiation in the horizontal direction, that is, tangent to the earth's surface at the transmitter. For shorter distances the strong component must be at greater and greater angles with the horizontal as the distance of trans-

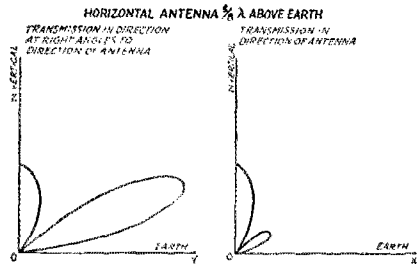


FIG. 20

mission becomes less. However, for general communication purposes, it is desirable to have an antenna which will transmit equally well in all the directions in the horizontal plane. That is, if we were to move around the antenna, in a circle on the ground with field strength measuring apparatus we should find equal field strengths at all points on the circle. If it were desired to communicate primarily with stations at great distances, then the characteristics of the an-

Figures 9 to 15 inclusive show the theoretical distribution of the radiated power at various angles with the horizontal of single vertical half-wave antennae, without loading and over a perfectly conducting earth. In each case l is the antenna length and d is the distance from its lower end to the earth. The grounded antenna radiates most strongly along the horizontal and the power falls off rather rapidly as the angle above the ground is increased. Thus for an angle of approximately 26 degrees above the horizontal, as shown in Fig. 9, the power has fallen to one-half of its value at the horizontal. Such a characteristic would be useful for medium and long distance communication, but would be valueless for short distance work. The grounded antenna is one-quarter wavelength long, as contrasted with the one-half wavelength of wire for the ungrounded antennae. The grounded antenna would be relatively simple in construction, but difficulty is encountered in obtaining an adequate grounding connection. For short wavelength work, even if buried plates which are bonded together are placed just below the transmitting equipment, it is practically impossible to attain a low resistance connection. The

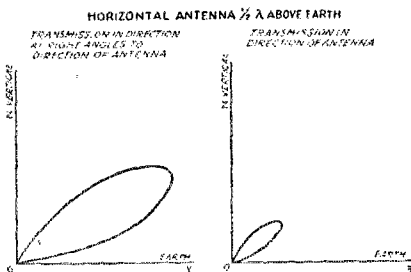


FIG. 19

curve shown was obtained assuming a perfect conducting earth.

Inasmuch as the ungrounded antenna does not require a grounding structure, and since, when it is raised some little distance above the ground the earth losses become quite small, this type has become almost universal for short-wave work. When such an antenna is erected over a perfect earth, the radiation characteristic has the same distribution with respect to vertical angle as has the grounded antenna, when the lower end of the vertical wire is placed at a very small distance above ground, this small distance preventing the conductive flow of current

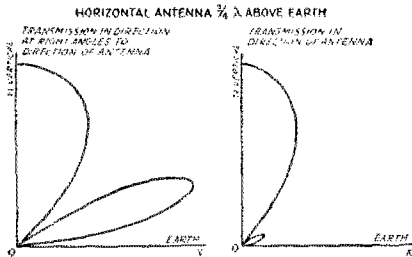


FIG 21

to earth. The characteristic is given in Figure 10, the small diagram at the right of the figure giving the geometry of the system. In both of the preceding cases there is but one leaf to the curve, that is, there is a single maximum and a single minimum; the former occurring for zero elevation, the latter for 90 degrees elevation.

When the lower end of the antenna wire

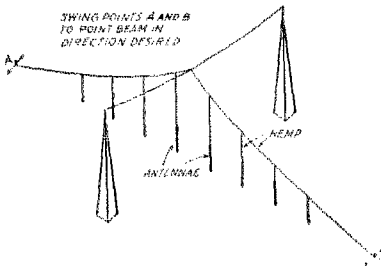


FIG. 22. DIRECTIVE ANTENNA GROUP OF TYPE USED AT 1XV

In the 1XV antenna but 4 vertical antennas were used, being excited as shown in the next two figures.

is raised a distance of $\frac{1}{4}$ -wavelength from the ground, the characteristic takes the form shown in Figure 11. The main

leaf of the curve is narrower than before, though the absolute maximum value still occurs at zero elevation. The curve now has two maxima and minima, the second maximum occurring at an angle of 61 degrees from the horizontal, and the second

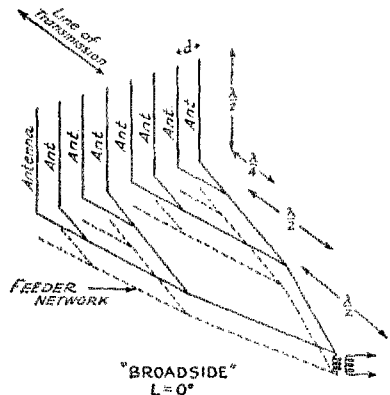


FIG. 23. AN ANTENNA GROUP TRANSMITTING PRINCIPALLY "BROADSIDE", BUT IN BOTH DIRECTIONS AS SHOWN IN FIGS. FOLLOWING. A SUITABLE FEEDER SYSTEM AND ITS NECESSARY LENGTHS APPEAR IN THE FOREGROUND

minimum at 42 degrees from the horizontal. The appearance of the small loop pointing high into the air is readily perceived in the figure.

Upon raising the antenna to a distance of $\frac{1}{2}$ -wavelength, the small loop of Figure 8 is increased in size and rotated slightly toward the horizontal, as shown in Figure 12. This loop continues to increase in size and rotate toward the horizontal as the distance of the antenna above ground is increased, while at the same time the main leaf of the curve becomes correspondingly narrower and narrower as may be readily seen from Figure 13 and 14, until the antenna has been raised to a height equal to its own length, i.e., one-half wavelength.

Upon carrying the antenna still further above ground it is found that a third loop appears and gradually increases in size, meanwhile rotating to the right (as does the second loop). The small third loop is just discernible in Figure 15.

CHECK TESTS AT 1XV

Since it was desirable to obtain experimental confirmation of the theoretical conclusions, the calculations were not carried beyond the dimensions which could be realized for the normal wavelength (39 meters) of the Round Hills experimental station, 1XV. The arrangement pictured in Figure 14 was in regular use at that station for some time, and is very interesting because of the double maximum.

The higher angle radiation undoubtedly accounts in part for the very strong signals which the station has been able to produce at distances of from 100 to 300 miles in daytime, while the narrow leaf of low angle radiation may account for the performance of the station in covering several thousand miles with very great consistency at night.

To obtain an operating check on the performance of the system, the antenna system was lowered from the position shown in Figure 14 to that shown in Figure 11, since for the latter position there is for all practical purposes but a single leaf to the radiation curve. This latter characteristic radiated more strongly at angles of 10 to 20 degrees above the horizontal, which resulted in better transmission from the station over distances of the order of several hundred miles at night than could

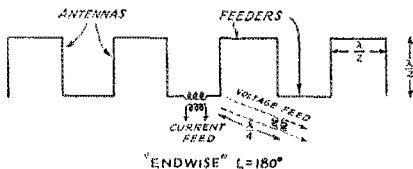


FIG. 24. AN "ENDWISE" GROUP IN WHICH THE H PARTS ACT AS FEEDERS CONNECTING THE V PARTS

The V parts are the antennae proper. Voltage or current feed may be used.

be obtained with the original system. The high angle loop of the original antenna characteristic was practically eliminated, which resulted in much poorer transmission over short distances.


HORIZONTAL ANTENNAS

The horizontal antenna is probably more commonly employed by the amateur station than the vertical antenna and is therefore of considerable practical importance. In the case of the horizontal antenna the resulting characteristic is not symmetrical, as in the case of the vertical antenna, so that in visualizing the results it is necessary to take cuts through the surface of radiation along principal planes, as, for example, planes vertical to the earth and passing through the center of the antenna either in the direction of the wire or at right angles to it.

To avoid duplication of work and to simplify the drawing of curves only one half of the cross section of each cut through the surface is shown in the accompanying figures. Referring to Figure 16, the point O is taken as the origin, this point being located on the surface of the earth, directly below the center point of the antenna. The antenna is shown lying in the XOZ plane,

and therefore the plane YOZ is at right angles to the antenna wire.

The curves on the right half of Figures 17 to 21 inclusive show the distribution of the radiated energy in the XOZ plane for various antenna heights. The distance from the point O to any point on the curve, such as A, is proportional to the power radiated

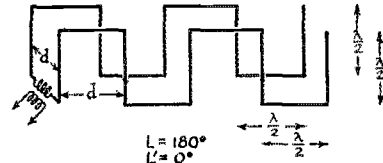

"ENDWISE" 2-ROW

FIG. 25. ENDWISE DOUBLE-ROW GROUP, FOR SHARPENING THE BEAM ABOVE THAT OF FIG. 24

Current feed is shown, although voltage feed is equally applicable, feeder then being connected at the bottom of any V wire.

in the direction OA. In the plane X'OZ the curve is of exactly of the same nature as the one shown and because of this symmetry there is no need of drawing complete curves. The curves in the left half of the figures show the power distribution in the YOZ plane, or at right angles to the antenna wire. Duplication is again avoided by not showing the duplicate curve for the radiation in the Y'OZ plane.

These curves were obtained by assuming a perfectly conducting earth, the antenna consisting of a single wire, one half-wavelength long and operated without any loading.

When the antenna is placed 1/4-wave-length above the ground a relative power of 100 percent is obtained in the vertical direction, 60 percent at an angle of 29 degrees above the horizontal and very little power for the lower angles, as shown by the curves Figure 17. For the same angle above the horizontal the radiated power is not the same in the direction of the antenna, as compared with that radiated at right angles to the antenna, it being greater in the direction at right angles to the wire.

In contrast to the large radiation along the horizontal, obtained with the vertical wire, it is noted that no position of the horizontal antenna results in radiation in the horizontal direction. Considered from the viewpoint of a refraction theory of transmission for short waves, this would indicate that the horizontal antenna could not compare with the vertical for effectiveness for transmission over long distances by "low angle" radiation. In general, this conclusion is sustained by results obtained at Round Hills, 1XV and Auburndale, 1BYX.

The horizontal antenna radiating most effectively at high angles, would by the same theory be very effective over short distances, which was also experimentally substantiated by the stations above.

From Figure 18 and 19 it is seen that as the antenna is raised to heights between $\frac{1}{4}$

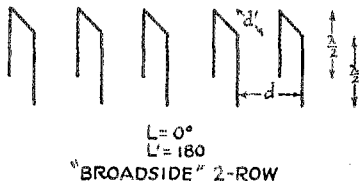


FIG. 26—BROADSIDE GROUP FOR SECURING TRANSMISSION LIKE THAT OF FIG. 23 BUT EITHER UNILATERAL OR BILATERAL.

A feed system like that of Fig. 23 is needed. The uni-lateral effect takes place if the rows are $\frac{1}{4}$ wavelength apart, and properly excited. The bilateral effect takes place when the rows are $\frac{1}{2}$ wavelength apart.

and $\frac{1}{2}$ wavelengths, the intensity in the vertical direction falls off slowly at first and then more rapidly, becoming zero for a height of $\frac{1}{2}$ -wavelength. The maximum radiation of 100 percent is obtained for all these positions, but the angle at which this radiation takes place progresses from the vertical toward the horizontal, taking the directions of 0, 48.2, and 60 degrees as shown, for transmission at right angles to the antenna. For transmission in the line of the antenna the maximum radiation falls off and at the same time the angle in which the radiation is confined is reduced, resulting in a small sheaf of radiation confined to an angle of about 50 degrees when the height reaches $\frac{1}{2}$ -wavelength. For this condition (curve 19) it is apparent that the system would operate to give much better transmission at right angles to the antenna, both as regards strength of signals and distance as compared with transmission in the line of the antenna. This conclusion was substantiated by results obtained at 1BYX, Auburndale, Massachusetts, where a horizontal wire running North and South was employed. Remarkably reliable communication was maintained with points in the vicinity of Chicago and Milwaukee (West of 1BYX) but only intermittent communication with points along the Atlantic seaboard (North-South line) was possible. Tests with other antenna systems seem to show that the discrimination in direction in this particular case was due entirely to the directional properties of the horizontal wire.

The curves given cover most of the horizontal antenna systems employed by amateurs, and serve to explain in a large measure many of the peculiarities of transmis-

sion which so puzzle amateur operators. If the existing conditions were such as to permit the erection of the most desirable antenna system the vertical type would probably be chosen for general communication purposes.

Considerable effort has been devoted to theoretical studies of directional transmitting antenna systems to find one which is readily realizable in practice and yet one which will yield a sharply directional characteristic. The basic principle general-

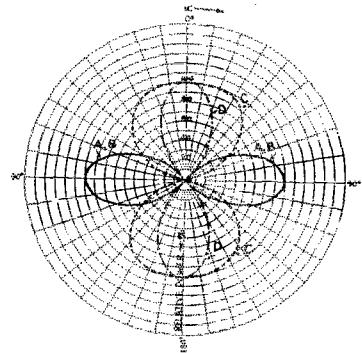
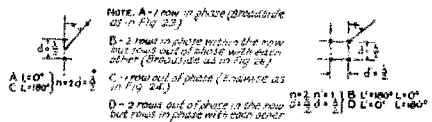


FIG. 27. IN THIS AND THE FOLLOWING FIGURES THE DIAGRAMS AT THE TOP SHOW THE LOCATION OF ANTENNAS, THE VARIOUS SCHEMES ALL BEING VARIATIONS OF THE PLANS SHOWN IN FIGS. 23, 24, 25 AND 26

The curves A, B, C, D show relative power in different directions, the curve to be understood as lying in the correct position with respect to the antenna-scheme shown in the same figure and the meaning of the lettering being as follows: (A), 1 row of antennae worked in phase after the manner of Fig. 23 and therefore transmitting broadside; (B), 2 rows of antennae worked in phase within the row by the same feed system as for (A), but with each antenna of the row supplying the corresponding antenna in the other row, the two rows being out of phase with each other (broadside); (C), 1 row of antennae worked out of phase after the manner of Fig. 24 and therefore transmitting endwise; (D), 2 rows of antennae arranged after the manner of Fig. 25, which is out of phase in the row but with the two rows in phase with each other and therefore transmitting endwise.

ly employed in involving a directional transmitter is that of placing a number of antennae and operating them so as to obtain an addition of their separate effects in certain favored directions, while obtaining an annulment of their effects in other directions. One of the simplest systems used consists merely of a number of vertical wires hung in a line and operated in a manner such that the currents in each wire are either

in phase or out of phase with the currents in the adjacent wires. The operation of the antenna with the currents either in or out of phase results in two distinct antenna systems, having entirely different characteristics.

ANTENNA GROUPS

If we operate an antenna consisting of a number of vertical wires hung in a line with all the currents in phase we obtain an antenna which is directional at right angles to the line of the antenna. This is termed a "broad-side" system since the main beam

the arrangement shown in Figure 23, wherein the antenna is fed by two-wire transmission lines whose length, as

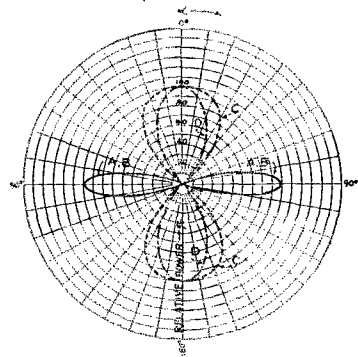
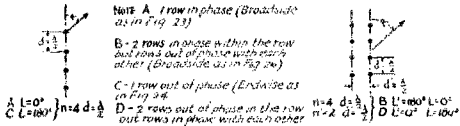


FIG. 29

measured from the transmitter to each vertical wire, must be the same for all wires and equal to an odd quarter-multiple wave-

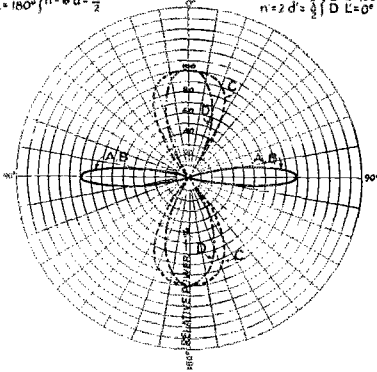
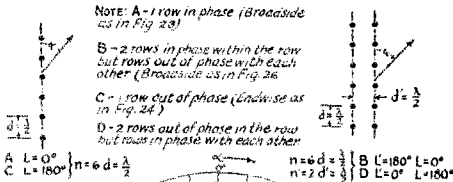


FIG. 28

is broadside to the line of the array. If the currents in each wire are out of phase with those in the preceding wire the system is termed an "endwise" system, since the main beam is in the line of the antenna array.

Before considering the relative advantages of the various possible arrangements it would be well to consider the means for exciting the antenna under the two conditions imposed above. In Figure 22 is shown a possible method of hanging a number of vertical wires by utilizing two towers or masts. The system sketched consists of eight vertical wires, each a half wavelength long and separated by a half wavelength, the height above ground being determined by consideration of the vertical plane characteristics mentioned above (Figures 9 to 15). If we desire to operate this system with all the currents in phase for broadside transmission we may employ

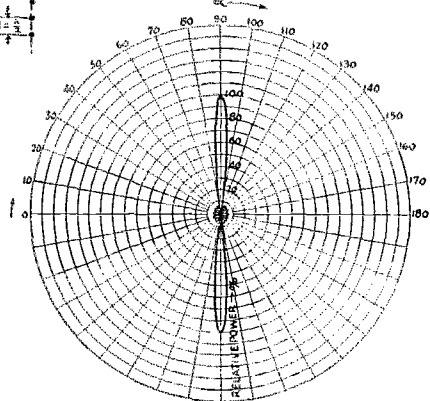
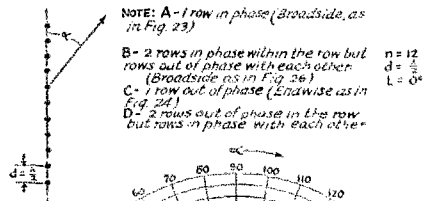


FIG. 30

length. In the figure this distance is 5/4 wavelengths long. The dotted lines indicate the second wire which makes up the

two-wire transmission line described above. This system is adjusted in exactly the same manner as the simple single wire antennae previously mentioned. It is readily seen that this arrangement requires a rather

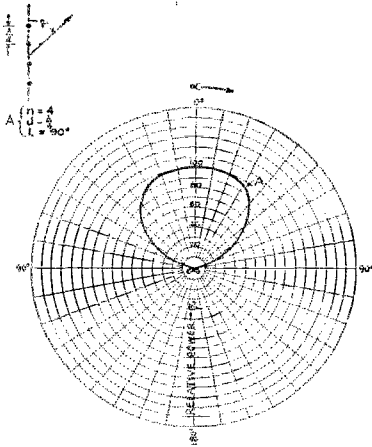


FIG 31

elaborate feeding system, if many antennae are to be excited. As used in British beam stations the feeders are mounted in the center of copper pipes, the pipes acting as the second wire of the feeder system and are mounted on grounded iron stakes.

For the endwise system the connections are much simpler as are indicated in Figure 24. Eight wires are again hung one half wavelength apart and a single continuous piece of wire may be made to serve for a number of antennae and their associated feeders. The system may be fed from a coupling coil placed at a current loop of one of the feeders (at the center of any horizontal part) as indicated, or it may be excited by a voltage feed system consisting of a two wire odd-quarter wavelength transmission line applied to a voltage loop of the system as indicated by the dotted lines (at any corner of the system). This system offers highly desirable characteristics from the view point of installation and operation, but has the disadvantage of a relatively wide beam.

In either system, it is possible to obtain a much sharper beam if two or more rows of antennae are used. Assuming that in each row the antennae are operated in the same manner relative to each other, then various types of distribution may be obtained from the system depending on the manner of operation of the various rows. From a practical operating viewpoint, the addition of a second row does not entail

much difficulty, provided that the spacing of the rows is one-half wavelength and that the antennae in one row are operated either in phase, or out of phase, with the antennae in the other row. In the broadside system, the addition of a second row produces no change in the shape of the distribution curve; in the endwise system, the addition of the second row makes the beam about one half as wide. Arrangements for operating two rows of antennae are shown in Figures 25 and 26. The simplicity of the endwise system is apparent; the broadside system, in the lower figure must be excited by means of the transmission line system indicated in Figure 23.

To obtain a sharp beam, it can be shown theoretically to be of little use to place more than one antenna in one-half wavelength of space along the line of the antenna. That is, if a space one wavelength long is avail-

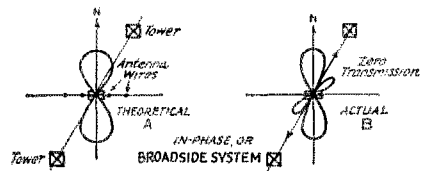


FIG. 32. THEORETICAL AND ACTUAL CURVES OBTAINED BY TESTING AT 1KV WITH A 4-WIRE VERSION OF THE SYSTEM OF FIGS. 22-23-28 A & B

able for the erection on the antenna, the resulting beam will be very little narrower if a dozen antenna wires are used than it would be if only two antennae were used. If a beam of a certain width, measured angularly around the transmitter in a horizontal plane, is desired, it is necessary to have a certain space in which to construct the antenna system; the space required will be greater, the sharper the beam, so that in a practical case, the available space determines for the amateur the sharpness of the beam that may be obtained.

If desired, one of the rows of a two-row antenna system may be placed one-quarter wavelength behind the other, by properly exciting the antenna system "uni-lateral" transmission is obtained. That is, not only will a beam result, but the beam will extend only on one side of the transmitting point, the signals in the opposite direction being very weak. This condition is difficult to attain in practice, but may be sufficiently well established so as to provide antenna directional characteristics which are of material advantage in certain cases. For example, a transmitter located on the sea-coast desires to communicate with stations located inland; the characteristic shown in Figure 31 gives practically 100 percent.

transmission over one quadrant, while eliminating radiation over the remaining three quadrants.

The curves shown in Figures 27 to 31 inclusive, represents the theoretical characteristics, in a horizontal plane, of antennae employing 2 to 12 wires. In the upper left hand corner of the diagrams are shown the arrangements for 2, 4, 6 and 12 wires in a row; in the upper right hand corner are shown the arrangements when a second row is used, the dots representing the wires as they would be seen by looking down on them from above. Curve A in each group gives the directional effect when the antennae are operated in phase (as in Fig. 23); Curve C when the antenna are operated out of phase (as in Fig. 24); Curve B shows the effect of a two-row system, the antennae in each row being in phase, while the rows are out of phase (as in Fig. 25); Curve D is for the two row system, the antennae in each row being operated out of phase, while the rows are operated in phase (as in Fig. 26). It will be seen that the system in which the antennae are operated in phase gives the sharpest or narrowest beam, and that the addition of a second row in these cases does practically nothing toward making the beam sharper. While the single row system in which the antennae are not of phase is not anywhere nearly as good, considering the sharpness of the beam, the addition of a second row materially improves the beam. However even after the addition of the second

feet high. By making use of the towers at Round Hills, support was arranged for four antenna wires, one-half wavelength apart, for 40-meter transmission.

This four-wire directional antennae has been operated both as a broadside and as an endwise system for several months at 1XV on 38 meters. The theoretical energy distribution of this antenna when used for broadside transmission is shown in Fig. 32a. Measurements made with field strength measuring apparatus upon the actual system as installed showed that the actual energy distribution was that shown in Fig. 32b. This distortion of the field was caused by the steel towers which supported the antenna and were placed as shown in the figure. As has already been mentioned the distance of each tower from the antenna system is approximately one-half of the operating wave and since the currents

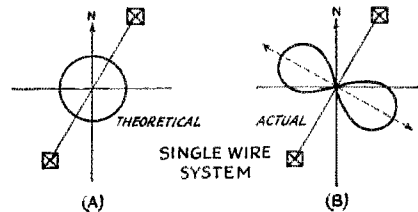


FIG. 34. RESULTS AT 1XV WITH VERTICAL ANTENNA, SHOWING DISTORTION DUE TO STEEL TOWERS

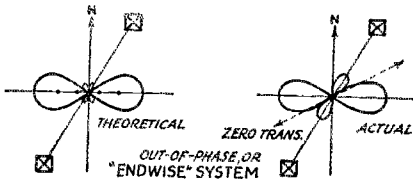


FIG. 33. THEORETICAL AND ACTUAL CURVES FOR 4-WIRE 1XV SYSTEM OF TYPE OF FIGS. 22-24-28 C & D

beam, is not anywhere nearly as sharp as is obtainable with the "broadside", or in phase system.

TESTING 36-METER BEAM SYSTEMS AT 1XV

For Figure 30, in which 12 wires are placed in line at distances of a half wavelength, the resulting beam is quite narrow, the relative power dropping to 50 percent of the maximum for directions differing from the line of the array by only 4 degrees. As an estimate of the space required for such a system, for 40 meters, we find that the line of antennae will be about 720 feet long, which is rather difficult to construct, since each of the antenna wires must be 64

in all the antenna wires are in phase the towers act as a reflecting wire place one-half wavelength from the antenna proper. Thus the steel towers cast a decided "shadow" and cause a "splitting" of the beam.

In the case of four wires operated as an endwise system the theoretical and actual curves were as shown in Fig. 33. In this system the antennae are operated out of phase and the transmission is aided in the line of towers.

It is readily seen that if the total power fed to a given antenna system is kept constant that the directional system will send considerably more power in a given direction than will the non-directional arrangement. At 1XV, signal strength reports received from stations that were in the beam were materially greater when using the four-wire directional system mentioned, than the reports obtained when using the usual single-wire vertical antenna, for the same tube input in the two cases.

Another type of directional system consists of a very long, low, horizontal wire, broken up into half-wavelength sections. Between the half wave sections are placed tuned circuits, which actually amount to

non-radiating half-wavelength sections. In this way the currents in the active half wave sections may be brought practically into phase, so that the effects of the separate antenna sections add up in a direction at right angles to the line of the antenna. The arrangement of the system is indicated

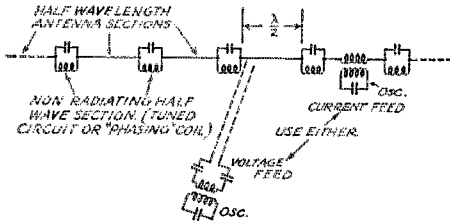


FIG. 35. ANOTHER "BROADSIDE" SYSTEM UTILIZING A LONG HORIZONTAL WIRE IN WHICH THE SECTIONS FEED EACH OTHER THROUGH INTERMEDIATE "PHASING COILS" OR THROUGH CLOSED CIRCUITS TUNED TO THE WORKING WAVE AND ACTING AS PHASE REVERSERS

The distribution is given in Fig. 36. Current feed may be used for each section in the manner shown in another figure.

in Figure 35. The system may be fed at the center of any one of the antenna sections, by "current" feed, as indicated, or may be fed at any of the junctions between a radiating and non-radiating half wave section as shown by the dotted lines. The non-radiating sections may be made up of a coil and condenser, very nearly tuned to the operating wavelength, or the condenser may be eliminated by making the coil practically self-resonant. In the latter case the coil is generally called a "phasing coil".

The directive curve of the system is shown in Figure 36, when looking down upon the antenna. The angle "A", measur-




FIG. 36. TRANSMISSION CHARACTERISTICS OF THE SYSTEM OF FIGURE 35


ing the angle between the direction giving 50 per cent of the maximum radiation on one side of the maximum to 50 percent of the maximum on the other side of maximum, depends upon the number of the radiating sections as follows (according to Meissner): 72 degrees for one antenna, 42 degrees for two antennae, 32 degrees for

four antennae and 14 degrees for eight antennae. Thus to produce a sharp beam we encounter the same difficulty as in other systems, the dimensions of the systems must be large compared with the wavelength. For a 14-degree beam at 40 meters, the length of the system would be 8 x 20 meters, or approximately 525 feet.

The characteristics of this antenna system in a vertical plane are similar to those previously given for a single half wavelength radiating section. If the height is made an odd multiple of quarter wavelengths then the energy radiated vertically is a maximum, while if the height is an even number of quarter wavelengths the energy radiated vertically is zero, if the ground is highly conducting.

Resisto Props

IT is strange that although resistors are used so frequently in radio work, the manufacturers of them have been content with supplying them without any particular means for mounting in a secure and permanent fashion. Many have been the contraptions that have been hastily contrived

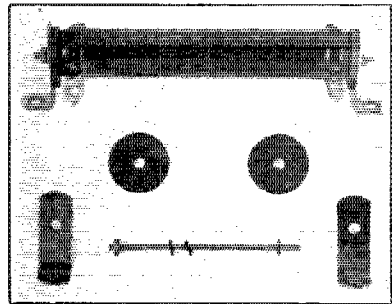

with the view of holding such units and many more times have they been "mounted" by their leads or terminals.

It is good to know that there are now available some honest-to-goodness mounts for the commonly used tubular shaped units. Two metal angles act as the "feet" of the mounting and a rod, threaded at both ends, is passed through the center of the resistor and the holes in the mounting brackets. Fibre washers act as cushions between the ends of the unit and the metal pieces. Nuts allow the entire assembly to be tightened up to a desirable condition and lock washers prevent them from working loose.

The resistor shown is also a product of the same manufacturer.

Resisto Props may be obtained in two sizes, so as to fit two-inch and four-inch resistance units. They are a product of the Daven Radio Company of Newark, N. J.

—H. P. W.

Double-Detection Receivers With Band-Pass and Screen-Grid Amplifiers

(Continued from Page 16)

other hand if one wishes to have a beat note there must be a long-wave heterodyne to beat with the second detector or else one must make the second detector itself oscillate. A not particularly good alternative for this is to make the intermediate frequency tube oscillate as was done in the double-detection receivers (with standard tube, not with 222) described in *QST* for January, 1927 (p. 40), June (p. 9) and February 1928, (p. 41) and also in the receiver of Fig. 6; though in the last case it was done for comparative purposes only. As expected the autodyne 2nd detector was materially the better device.


Mr. Ross Hull has suggested that the receivers just referred to may be both improved and simplified by replacing the i.f. tubes with a single UX-222, so that the final system will consist of an autodyne first detector, a 222 i.f. tube, an autodyn 2nd detector and possibly one a.f. tube. This is again the system previously referred to, with the change that the 2nd detector is oscillating. As was said before, such systems with standard tubes (less band-pass) have been described but in these cases the i.f. was more or less regenerative (see Fig. 6) and in some cases oscillating, thereby causing some interference with the autodyne first detector, not only as to twitterings but also in the way of a tendency to make the first detector howl when the i.f. regeneration was changed. The exception was a 5-meter receiver shown in Fig. 8 and in this case the intermediate frequency was not a favorable one, being about 665 Kc. The combination seemed promising however and was easy to handle as well as being quieter than the ordinary i.f. but not as quiet as the receivers equipped with band-passes.

The Rusco transformers may be obtained from the Columbia Metal Products Co., 57 E. Ohio St., Chicago, Ill.


More will be said in *QST* about this type of receiver.

An Amendment to the Cure

IN the article "A Simple Cure for an Old Ailment", by A. J. Haynes (December, p. 44) there should have appeared a circuit drawing and a photograph. The post-office together with the mysteries of putting the magazine helped to keep the two illustrations out. At the moment

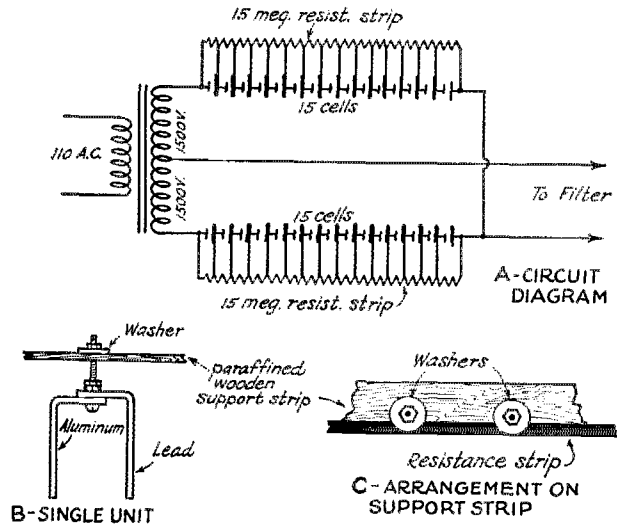

when this is written the photo has appeared, and the diagram is on hand also.

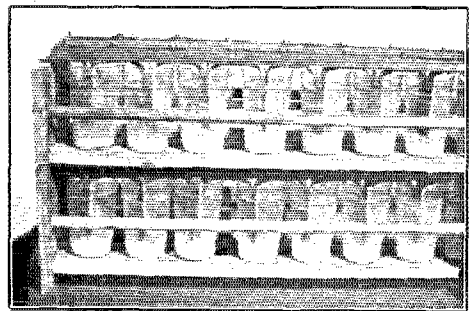

HERE IS THE ARRANGEMENT OF THE RECTIFIER

They therefore appear herewith with our apologies that they could not have appeared in *QST* last month.

Two Inexpensive Test Sets

By Frank Palmer*

PERHAPS I should qualify the title of this article somewhat, and call it a comparatively inexpensive test set, in that it may be built for a great deal less money than is asked for the commercial

venient, and do not offer such varied uses as mine.

It has long been the custom to make radio sets more impressive by "dolling" them up with filament voltmeters and ammeters. These pleased the hick from the high grass immensely, but as far as telling anything vital as to the operation of the set, the ammeter was entirely useless and the voltmeter very nearly so. This latter instrument was anchored to the receiver panel so it could not be used for any of the countless purposes it might otherwise be available for.

After my graduation from the hick class, I frequently found myself chasing all over the place to find my filament voltmeter. Having satisfied that curiosity, I would most likely repeat the operation for a plate voltmeter; about that time I'd get a hunch my grid bias was not right, and a search for the milliammeter was started, which resulted in disconnecting everything in sight so I could ascertain said grid bias. After keeping this up for some time I suddenly saw a light, and in December, 1926, I nailed all the blamed meters to a board as shown in the accompanying photograph of Fig. 1.

In Fig. 1, I have used the less expensive Weston meters. The Model 489 double-range low-resistance voltmeter is used coupled up with a double-pole double-throw switch as indicated in Fig. 1A and 1B. The addition of pin jacks as shown makes these meters available for other purposes though the test leads are of a substantial size and insulated with rubber hose as shown in Fig. 2A.

The flush type 301 meter lends itself nicely to the arrangement as shown. The push button throws the grid bias meter in or out of the circuit at will.

To make it convenient to test tubes in connection with the sets to which they belong—especially to check the continuity of the circuits—there has been made up a test plug with a flexible cord as shown in Fig. 1A. This cord can be plugged into the socket of the set, the tube then being transferred to the socket of the test board. By using a UX socket on the board and a UV-199 plug on the cord it is possible with the ordinary adapters to handle all the usual varieties of tube bases and sockets. The test plug is made by cleaning out the base of a 199 peanut tube, unsoldering its leads and replacing them with eighteen-or twenty-inch lengths of ordinary No. 16 cotton covered lamp cord. These cords are then placed parallel to the sides of the base and melted

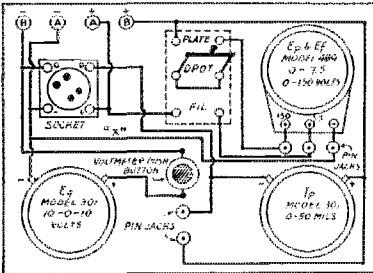
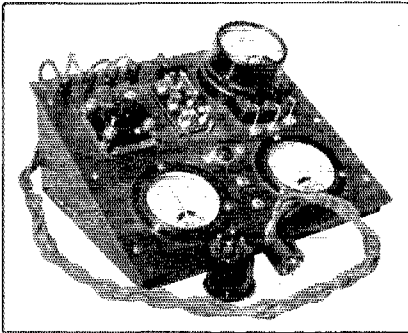


FIG. 1A

FIG. 1. THE "BENCH BOARD" TYPE OF TEST PANEL FOR TUBES UP TO AND INCLUDING 201-A.

When operating with the test cord plugged into a set, meter reads plate voltage, with the switch down it reads filament voltage. Plate current can be read at any time on the milliammeter and grid bias can be read on the zero-center voltmeter by pushing the button at the center of the panel. When testing a tube apart from a set the batteries are connected to the 4 binding posts, the tube is plugged into the socket and the readings made as before. Any C battery that is desired may be connected across the B minus and A minus posts, otherwise the grid is open until the voltmeter button is pushed and then drops to "zero grid," in other words is returned to the negative filament.

For other work the meters are independently available by use of the pin jacks and the two left-hand binding posts. The only permanent inter-connection is between the negative terminals of the two voltmeters. A single-pole switch cut in at "X" would interrupt this if there seems to be any advantage in complete independence. The two-pole switch must of course be open.

Photos by Author.

articles of this type, which according to my experience are in many ways less con-

*Atlantic, Mass.

(Concluded on Page 40)

Another "Code-Learning" Set

By Harold P. Westman, Assistant Technical Editor

MANY sets have been described for those who are desirous of learning the code by listening to long-wave transmissions. Some of these have used the very minimum of equipment and left the problem of getting the set to work to the picking of a suitable tube, the characteristics of which would fit in with the other constants of the set. In many cases the inexperienced man has been unable to get satisfactory operation from them and in an effort to get reliable action has gone to the other extreme and put in everything that could be thought of.

The set to be described falls in neither of these classes. It gives an honest-to-goodness control of regeneration as well as wavelength. At the same time, the amount of equipment is small and the circuit of the simplest form.

The circuit appears in Figure 1. As will be noted, two inductance coils are needed. One is shunted by the variable condenser and is connected between the grid and filament of the detector tube and the other acts as a tickler coil being in the plate circuit of the detector and coupled to the first coil. The antenna and ground are connected

some pre-determined signal. As far as radiating is concerned, the average 100- or 150-foot receiving antenna is not very effec-


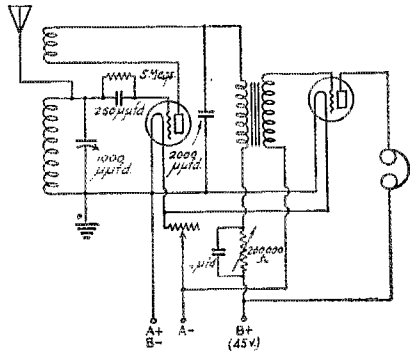


FIG. 1

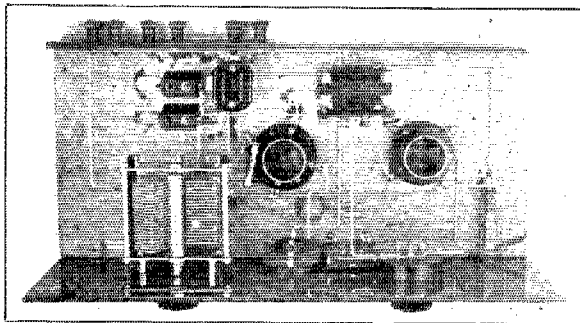

SHOWING THE SET WIRED

tive in radiating at wavelengths above eight or nine thousand meters. One should also consider that there are very few receivers operating in any average location which might be interfered with.


Regeneration is controlled by means of a variable high resistance in the B-battery lead to the plate of the detector. The plate voltage is equal to the voltage drop across this resistor subtracted from the B-battery voltage. As the resistance is varied, so is the plate voltage varied which in turn affects the amount of regeneration occurring in the circuit. It will be found that this method offers a very smooth control which causes little detuning.

The inductances used are duo-lateral coils. This particular set was built to employ coils mounted on plugs although there is no reason in the world why one cannot use unmounted ones and a couple of pair of Fahnestock clips to take the leads.

Why folks should be more inclined to guess, rather than calculate, in which direction the tickler coil should be connected, in order that the feedback will be in the proper phase for causing oscillations, is a profound mystery. Perhaps laziness is the answer, for it certainly can't be ignorance! No, not with such a simple and fundamental example in front of one as the Hartley cir-


across the first coil, this arrangement being commonly referred to as a "single-circuit tuner". It may be said in its favor, that it gives the loudest signals of all methods of antenna coupling. As drawbacks, we find that it tunes broadly and when in the oscillating condition radiates, acting as a miniature transmitter. However, for code practice one does not of necessity listen to any given station but may pick out the loudest one and under these conditions the broad tuning will not be so damaging as it would be were it required that one listen to

cut. If the grid and tickler coils are wound in the same direction and are placed end to end, it is only necessary to remember that the grid and plate connections come from the extreme ends of the coils or from the

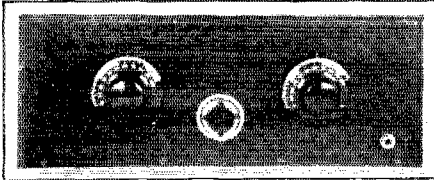

THE PANEL VIEW OF THE SET

two inner ends. Don't run the one to an inner end and the other to an outer end for that won't function properly, at least not unless the coils are *not* wound in the same direction. In this particular case with dual-lateral coils, one might become a bit hazy as to the direction of winding. A simple plan is to mount the two plugs parallel to each other with the jacks (holes) on the same side and then mentally slide one of the mounting plugs alongside of the other so that all the plugs and jacks are in a straight



line. When doing this, don't turn either plug around. When they are lined up, consider the two terminals of each plug as the terminals of the winding with the windings in the same direction. The diagram may help you to understand matters more easily so see Figure 2.

The mounts for the coils are an extra pair of the plugs which usually adorn them. Two pair of metal angles solve the problem of nailing them down to the baseboard. Any sort of a variable condenser that has a capacity of between 500- μ fd. and 1000- μ fd. (.0005 to .001 μ fd.) will do the trick. UX-type sockets would allow either dry-cell or storage-battery tubes to be used although in this particular case a pair of 201-A's is used and the sockets even though they are not mates were on hand and do all that is necessary as far as operation of the set is concerned. An audio transformer out of an old B. C. set will do nicely or else one of the many that can be purchased for less than a dollar. The same idea applies to the other equipment used. The requirements are not very exacting and parts from an old set will probably be quite as satisfactory

as would parts purchased especially for the occasion.

The following table will give the wavelength ranges of various coil combinations. They assume a tuning condenser of 1,000 μ fd.

Wavelength Range	Grid Coil	Tickler Coil
2,550 — 4,250	300	150
4,200 — 6,300	400	150
6,240 — 14,500	750	400
13,600 — 21,000	1250	400

It is to be noted that one may cover the range of from 6,240 to 21,000 meters with but three coils, the same size tickler being suitable for both grid coils. This combination will give one all the code instruction that could be desired. The two smallest coils will allow NAA, Arlington, Va., working on 2,655 meters to be picked up directly for time signals, news and weather reports at noon and ten p.m., E.S.T. This, in the early days, was considered an excellent chance of doing some real DX but at the present is not considered as being so "hot". However, curiosity usually causes one to take a listen and so the proper sizes of coils are shown.

Midwest Division Convention

Ames, Iowa, April 13th-14th

THE Annual Radio Short Course will again be given by Mr. D. C. Faber, Director, Engineering Extension Department, Iowa State College, Ames, Iowa, on the dates mentioned above. This convention has become known as one of the best in the country where one may obtain the best there is in technical radio. This does not mean, however, that the brass-pounder is forgotten because the convention will be under the general supervision of Director Quinby and A. W. Kruse, Section Communications Manager.

Harold P. Westman, Assistant Technical Editor, QST, will be with us and will represent A.R.R.L. Headquarters. Fred Schnell, former A.R.R.L. Traffic Manager, is expected to be present and Professor J. M. McNeely, besides several other good speakers, who will make the meetings interesting.

All events are to take place at the college.

Mr. D. C. Faber will be glad to hear from those who contemplate being present.

All About the Tube-Base Receiver

By P. H. Quinby*

JUDGING from the number of requests I have been getting for additional information on the construction of the "tube base" receiver, I am beginning to think would be short lived; that I could eventually wade out and get square with the mailman again.


But just as I was hoping the thing had been forgotten about, Mr. Handy blossoms forth with a revised Handbook telling the gentle reader just enough to pique his curiosity and give him an appetite for more. And if my mail is a criterion, the market for those Handbooks is certainly brisk. Individual replies were impossible. I had to make up a drawing with everything on it I could think of except the color of the panel, and get a flock of prints made.

As previously stated, simplicity is paramount. The circuit is not new. There are a few minor changes worthy of note. After making numerous comparisons of "capacitance" and "resistance" control of regeneration, I find that, for ordinary detector plate voltages, the capacitance method gives the greater signal strength, but resistance method has the lesser effect on tuning of grid circuit. It is easy to understand why the capacitance method effects grid tuning. In the resistance method, the conventional fixed condenser used to replace C3 in the diagram is much too large. Its reactance at high frequencies is so low that oscillation does not die out until the resistance R2 drops the plate voltage far below the point of maximum efficiency for detection. This accounts for the reduction of signal strength when using this method.

In order to offset this evil the capacity of C3 must be reduced until its increased reactance requires a plate voltage sufficiently high to give good detection before forcing the tube into oscillation. This value will vary with tube, circuit constants and general arrangement of parts. The simple way is to make R2 and C3 both variable, then adjust them in combination until maximum signal strength is attained. With this setting of C3, we can then control regeneration with R2 without a sacrifice of signal strength. This combination then gives us the benefits of both methods.

With a two-stage amplifier on a pair of


head phones we usually find a multitude of circuit noises. Grounding the audio transformer frames will usually quiet down the amplifier itself (test by removing antenna,

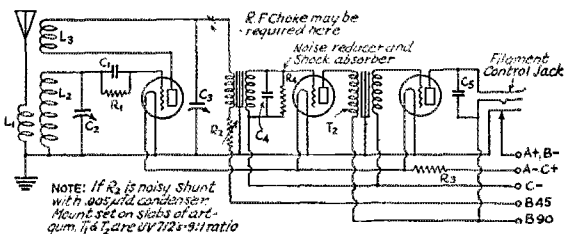

NOTE: If R2 is noisy shunt with .05 μfd condenser. Mount on slots of argum. 1/4 & 1/2 are 0V725-9:1 ratio

REFERENCE TABLE			
C1	.001 μfd	Mica Fixed Condenser	
C2	.0005 μfd	Midget Variable Cond. plate	
C3	do	do	
C4	.0005 μfd	Mica Fixed Condenser	
C5	do	do	
R1	10 Megohm	Grid Leak (Noiseless)	
R2	0-50,000 Ohm	Breadbridge Pot	
R3	Rheostat or Amperite		
R4	1/2 Megohm	Grid Leak	
L1	2 turns	bell wire around coil socket base	
L2	Grid coil	on plug in tube base	
L3	Tickler	" " " "	

Wave Band	TURNS	WAVE BAND	TURNS	WAVE BAND	TURNS
80	37	28	25	30	
40	16	22	20	30	
20	7	22	10	30	
10	3	20	5	30	
5	1	20	3	30	



TUBE BASE COIL
NOTE: Remove old tube & leads from base. Drill small holes for leads. Wind both coils same direction. Run ends of coils thru prongs & solder.

SHORT WAVE RECEIVER USING TUBE BASE COILS AND MIDGET CONDENSERS

BY P. H. Quinby - 9DXY - St. Louis, Mo.

ADVANTAGES: High L:C Ratio. No heavy end plates in condensers. High amplification with low noise level. Combined capacity and resistance control of regeneration. Good form factor in inductance. Economical efficient plug in system. Better signal spread over dial. Simplicity-Compactness.


ground and detector tube). If it is still noisy look at your batteries and terminals. To shut off the noises in the detector circuit is not so easy. You must have a good, quiet grid-leak. The tube itself must be good. Even then some noise comes thru. To reduce it, C4 and R4 (see diagram) are placed across the secondary of the first transformer. This cuts the signals down somewhat but seems to cut the noise more; makes the wearing of a headset quite comfortable, and still leaves enough signal to be heard all over the room.

For those wishing ultra-simplicity, the rheostat R3 can be replaced with an Amperite to fit your tubes, and the jack can be made filament control, taking two controls off the panel.

It is a big advantage to cut the tuning condenser C2 down until one amateur hand covers nearly all the dial. This may be done by removing plates from the midget condenser used. It is also advisable to set C2

*9DXY, Director Midwest Division, A.R.R.L., 817 Lauderman Building, St. Louis, Mo.

and C3 back from the panel to eliminate hand capacity effects on waves below 30 meters. Constructional data for the coils is shown on the chart for various amateur

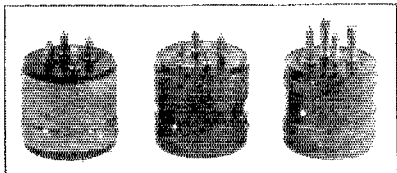

THE SCOTTISH RECEIVER COILS

bands. These will vary slightly with the general arrangement of parts and wiring, but final adjustment may be made by adding or deducting a turn or so until the band is centrally located on the dial, and smooth regeneration is secured over the whole band. If dead spots occur it may be necessary to detune the antenna or loosen coupling to grid coil. If the coils are wound on UX tube bases and the antenna coil is wound around the socket base, coupling may be loosened by pulling the tube-base coil up away from the socket. Nearly $\frac{3}{4}$ " adjustment can be had in this way.

A receiver of this type is well within the means of everyone, and if properly built is without a peer. Its smooth control of regeneration makes it well adapted for short-wave phone and broadcast work, and the boon of the brass pounder.

BOOK REVIEWS

By R. S. Kruse, Technical Editor

EMILE BERLINER, *Maker of the Microphone*, by Frederick William Wile. Introduction by Herbert Hoover, published by Bobbs Merrill, Indianapolis, 353 pages, 19 photo illustrations, price \$4.

Mostly we radio folks are too absorbed in our own affairs, too little informed of other things, even those next door to us in the electrical arts. It is well, then, to depart from the trail and let Mr. Wile lead us into the paths trodden by Emile Berliner who worked in the allied field of telephony, but who did not stop there but touched upon many things indeed. His story is not yet done though it began long before radio and was intimately knit with the beginnings of the telephone. However so much has been touched by him in these years that there is much to tell—and the author has told it well.

Wireless Direction Finding and Directional Reception, by R. Keen; 2nd Edition, 490 pages, 329 Figs., published by Iliff & Sons Ltd., Dorset House, Tudor St., London, E.C.4, England, Price 21 s.

The American reader is at once struck by the rather small share of space assigned in this book to those methods of directional reception which employ special collectors of antenna form, such as the Beverage antenna. Correspondingly a very large share of space is given to reception with loops, or as the

English term has it "frames", especially the large crossed coils of the Bellini-Tosi system. This is quite probably a survival from the first edition which was named "Direction & Position Finding by Wireless"—which still remains the main subject of the book. The limitation must not in any manner be thought of as a defect for even in 490 pages one cannot cover all the phases of directive reception, including measurements of field strength and direction. It was wise therefore to follow the plan of "doing" the radio compass thoroughly, so thoroughly that the average reader will be quite surprised at the multiplicity of the things he had not considered at all.

Practical Radio Telegraphy, by Arthur R. Nilson and J. L. Hornung, 380 pages, 223 illustrations, Published by McGraw-Hill Brook Co. Inc., New York, Price \$3.00.

The authors of this book are both of the West Side Y.M.C.A. Radio Institute of New York City and the book is intended as a text for prospective radio operators. In view of the utter lack of a modern text for such work the book is certain of a good reception.

There are surprisingly few of the usual accidents and oversights that one expects in a first edition. Even the large portions quoted from operating manuals for commercial apparatus have been freed from the horrible grammar that is ordinarily found in such works.

To the Technical Information Service the book will be a relief—there is now an answer to the standard question, "Where can I find out something about commercial radio operating?"

Elimination of Inductive Interference in Radio Reception by J. O. Smith, Published by Radio Corporation of America, 22 pages, mimeographed.

It is most unfortunate that this booklet has marred an excellent purpose by claiming such a large excess of glory for its publishers. To deprecate the idiotic American tendency to cure everything by a hasty law, ignorantly conceived and stupidly passed, is a very good thing. But why base the argument on a suggestion that the writer's firm has been in the fore-front of the weary detail search for the causes of "man-made" interference when it is possible to cite a lonely 500 cases

Except for this thing of getting the cart before the horse, the book is good. It exposes the dreary myth of the "leaky transformer". Just as N.E.L.A. and R.M.A. have been doing these past years, quote very extensively from Stephen B. Davis of the Dept. of Commerce concerning the advisability of local radio laws and then differs with him quite effectively (for which difference this reviewer compliments the author) and winds up by giving some of the left-over credit to the N.E.L.A. Coordination Committee and R.M.A. After all it turns out to be a matter of peculiar perspective—the facts are corrected.

New England Convention

April 20th-21st, Boston, Mass.


ALL aboard for Boston. Hear ye New England Hams; prepare yourselves for the annual New England Division convention to be held at the New Elks Hotel in Boston, Mass., April 20th-21st under the auspices of the Eastern Mass. Amateur Radio Association.

The committee in charge will have one of the best programs ever given for the delectation of the delegates. All are cordially invited to attend. Write the secretary of the association Miss Gladys Hannah, 1KY, 3 Summer Road, Cambridge, Mass. for your reservation.

nu4OC

WHEN a pair of five-watt tubes was first installed at 4OC, this was the only station in Durham, N. C. There being no assistance available locally, recourse was had to the League's Information Service for the solving of the many difficulties that arose during the period of construction and adjustment. Many thanks are herewith tendered for the patience with which the myriad

quency doubler. After several all-night attempts, current was finally put into the antenna. The circuit adjustments failed to hold properly and finally an additional amplifier was put in. This was a worthwhile advance and made a world of difference in the adjustment of the set. A considerable amount of experience was obtained from this experimenting and the idea that it requires a great deal of testing to get a

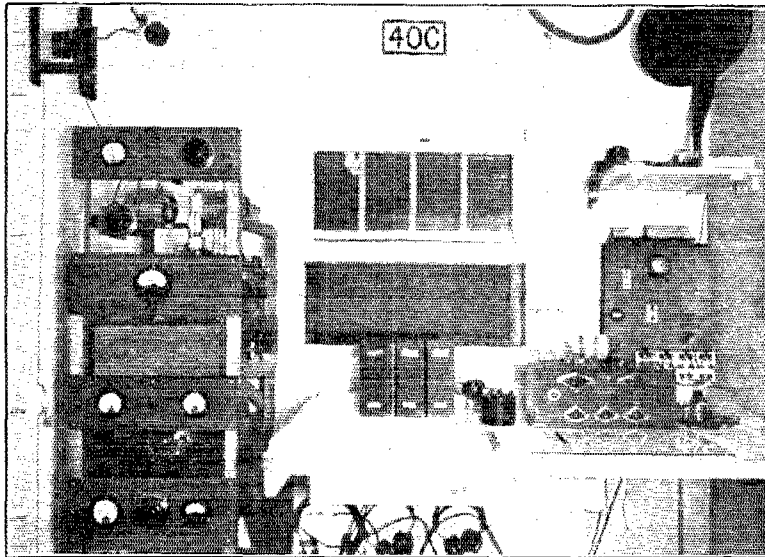

THE OPERATING TABLE AND TRANSMITTER AT 4OC

The wooden handle on the wall at the right is connected by means of a wooden strip with the switch to control the motor-generator which is located across the room.

questions were answered by that Service. Later, a friend at the University of North Carolina was kind enough to give a few instructions which helped things along wonderfully and made it possible to obtain a first class license.

The small tubes soon gave way to a single 203-A and a 1500-volt, Esco motor-generator was acquired. In spite of its being thoroughly filtered and giving a smooth output, all reports were choppy, unsteady and everything else that one would not desire. It was finally decided that crystal control was the answer to the question as its performance could not be any worse than that of the oscillator arrangement in use.

A 79-meter crystal and an excellent dust-proof holder were obtained from the Scientific Radio Service of Mt. Rainier, Maryland. A UX-210 was used as the crystal tube and the 203-A was employed as a fre-

quency doubler. After several all-night attempts, current was finally put into the antenna. The circuit adjustments failed to hold properly and finally an additional amplifier was put in. This was a worthwhile advance and made a world of difference in the adjustment of the set. A considerable amount of experience was obtained from this experimenting and the idea that it requires a great deal of testing to get a


TRANSMITTER

From the photo you can see that the frame is made of wood. Oak was used and dipped in paraffin. This made it look as if it had been varnished, as well as protecting it from damp weather. From top down can be seen the antenna lead-in which is a pyrex bowl. One-quarter inch copper tubing is used for all connections from transmitter to antenna system. The antenna switch has mounted next to it a 500- μ fd. series condenser which at present is not in use.

On the top panel in the frame is the antenna meter and primary tuning condenser. Next can be seen the antenna tuning condenser which shunts the antenna coil, and the amplifier plate coil.

The coils, which are mounted on glass rods, are spaced $4\frac{1}{4}$ inches and the current in a third harmonic antenna is somewhat over one ampere. (Of course, the highest antenna current is not necessarily the best, but from the flattering reports received here now, this is without question better than anything yet tried at this station.)

On the second panel can be seen the a.c. filament voltmeter. Directly beneath it there is a small knob which is a two-pole

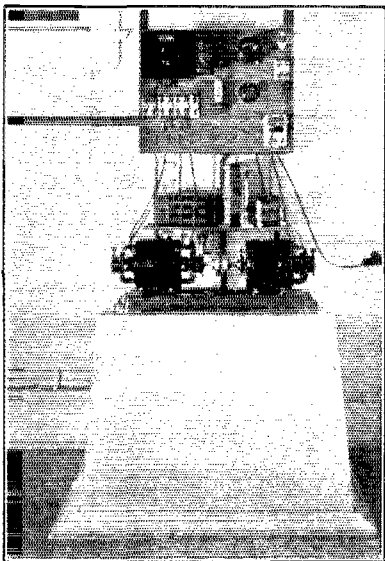

THE POWER SUPPLY FOR THE TRANSMITTER

The concrete base is built from the ground up and is not resting on the floor or touching any part of the room. The switchboard is hung from the ceiling and vibration from the rotating machine can only be transmitted through the wiring. The strip of wood running out of the switchboard just below the four knife switches connects to the switch controlling the motor-generator and is terminated at the wooden handle that appears in the other view.

switch making the reading of both filament voltages possible. Below this panel comes the intermediate stage. In the photo may be seen an oak box. This is used only for looks and covers the copper box which holds the intermediate stage. The controls for the tuning of this stage are at the side facing the operating table. The neutralizing condenser C5 (see circuit diagram) is enclosed in the copper box with the intermediate stage. Directly above this stage on the side are two condensers. The one nearest the reader is C6, neutralizing condenser, and the other one is C7, feeder condenser between intermediate stage and power amplifier.

Next comes the third panel from top which holds a 0-2000 d.c. voltmeter and 0-


300 milliammeter. In between these two meters can be seen another small knob. This operates a double-pole switch making it possible to read both plate voltages. The milliammeter is used in the 203-A circuit. In the center just below this panel is the feeder condenser, C, between the crystal oscillator and the intermediate stage. On the bottom panel is a milliammeter, tuning condenser, and an r.f. ammeter, which are in the crystal oscillator circuit. This circuit is contained in a copper box directly behind this panel. The C bias batteries for this circuit are also enclosed in the same box with the crystal circuit. Directly below this panel is the equipment for keying.

KEYING

On the floor and lowest shelf there are two units of Burgess "C" batteries. These are connected in series as shown in the circuit diagram. When the key is open it applies a very high bias to the grid of the power amplifier tube, high enough to completely block the tube. When the key is closed, the normal bias is applied to the grid.¹ In an article on this in the January, 1927 issue of the Proceedings of the Institute of Radio Engineers, it is recommended that one of the intermediate stages be keyed. In this particular case, however, the power amplifier is keyed as it was found that changing the bias on the amplifier next to the crystal tube would effect the operation of the crystal circuit. In the circuit diagram, a key is shown which in reality is a Leach relay operated from a six-volt storage battery.

Around this relay is a 1- μ f., 300-volt condenser and a 400-ohm potentiometer used

1 If the plate voltage for the crystal tube is not obtained thru a resistance from the same source as the amplifier, it is possible to obtain the high blocking voltage by means of a potentiometer or voltage divider across the plate supply. The circuit is shown

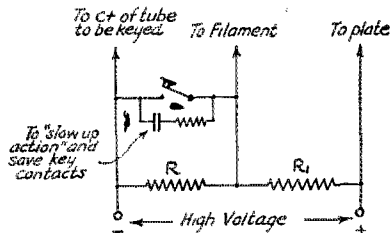

herewith and if R has one half the resistance of R1, the voltage drop across it will be one third of the total across the two. When the key is open, one third of the "plate" voltage is applied to the grid and the rest to the plate. When the key is closed, all the voltage is applied to the plate and none to the grid because the resistor R has been short-circuited. The resistor R1 is then just shunted across the plate supply system and must be capable of dissipating the amount of energy it takes from the supply. In this particular case, R may be 100,000 and R1 200,000 ohms, both capable of dissipating 10 watts.—Assistant Technical Editor.

to prevent key thump due to the relay circuit. The relay is located directly behind the top unit of "C" batteries. It is enclosed in a dust proof box and mounted on rubber to prevent vibration.


From the diagram it will be seen that when the key is open the whole "C" voltage is impressed on the grid of the power amplifier. A complete blocking of the grid is necessary and the amount of bias will vary according to voltage supplied to the grid from the preceding stage. When the key is closed it reduces this bias to the proper working voltage. Changing this bias is a very convenient way to control the output of the power amplifier. The resistance, R3, is very high and as the current flow is practically nil there has been no noticeable difference in the life of the batteries and their expected shelf life. This system seems to be the best one tried here in regard to key thump. While trying the center tap method, the key thump was terrible. Now, however, the b.c.l. set next door, which is about thirty feet from the transmitter, fails to register the slightest trace of key thump. A short-wave set can be tuned one degree off wave and absolutely no key thump is present. Until this system was installed many complaints were made and it looked as if the case were hopeless.

POWER SUPPLY

The power used on the plates of the tubes is obtained from an Esco motor-generator, which has ball bearings and will deliver 1500 volts. It delivers three different voltages, but only two are used. The black box at the left top of switch board is a voltage regulator and about 1100 volts are used on the 203-A. Another tap from the motor-generator is used which supplies 275 volts to the two UX-210s. The motor is of one-quarter horsepower and is directly coupled to the generator. The machines are mounted on a solid concrete base which is built from the ground up, and does not touch the floor of the shack. This eliminates any vibration which might cause unsteady signals. On a shelf above the motor-generator is the filter, which consists of a 30-henry Acme choke and eight 1 ufd. condensers. The choke is in the positive

high voltage lead and four of the condensers are shunted across the line on each side of the choke. The 275-volt supply that is obtained from the machine is filtered by means of a 3-henry choke in the positive lead and a 1 ufd. condensers across the line both sides of the choke.

Although not shown in the photo, there is a 200 turn r.f. choke in each line and also

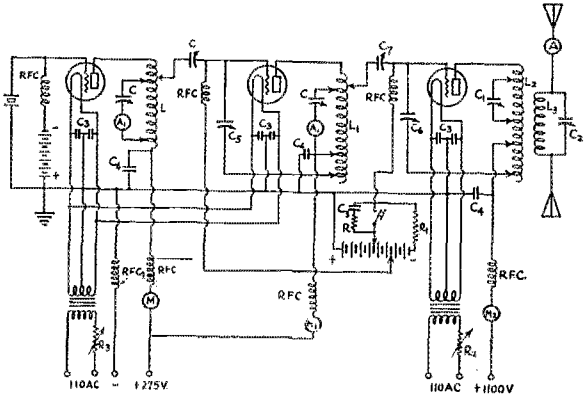

SCHEMATIC DIAGRAM OF THE TRANSMITTER

- A—r.f. ammeter, 0-1.5 amperes.
 - A1— " " 0-2.5
 - M—milliammeter, 0-75 mils.
 - M1—milliammeter, 0-100 mils.
 - M2—milliammeter, 0-300 mils.
 - RFCh—85 turns No. 26 d.c.c. on 1/2 inch form.
 - RFCh1—250 turns on 2.5 inch form
 - C—250-µfd. receiving condenser.
 - C1—500-µfd. transmitting condenser.
 - C2—250-µfd. receiving condenser.
 - C3—By-pass condenser 1-µfd.
 - C4—2,000-µfd., 3,000 volt condensers.
 - C5—200-µfd. receiving condenser.
 - C6—150-µfd transmitting condenser.
 - C7—230-µfd. transmitting condenser.
 - R—400 ohms.
 - R1—10,000-ohm Ward Leonard resistor.
 - R2—Allen Bradley Radiostat.
 - R3—210 Bradleystat.
 - L—18 turns No. 6 copper wire on 3 inch form.
 - L1—11 turns No. 6 copper wire on 3 inch form.
 - L2—7 turns of 5 inch REL inductance.
 - L3—4 turns of 5 inch REEL inductance.
- The plate and filament voltmeters and their switches are not shown.

one in each side of the 110-volt, 60-cycle a.c. supply line. These are back of the switch board. From left to right of the switch board are voltage control, of the motor-generator, Acme filament heating transformer, G.E. filament heating transformer, and a 100-watt lamp which is used in a charging circuit for some Willard "B" batteries. These are in the cabinet back of the head phones. (See other photo.) From left to right on bottom of board are four switches which enable a change of the voltage on the motor-generator. Under these may be seen four fuses which are in all leads from the motor-generator to protect it from a burn

(Concluded on Page 70)

2 It should not be thought that this method will cure all key thump troubles. There are many cases where it has not proven so satisfactory and it is apparently in the same class with several other methods for doing the job. If the particular method happens to fit your conditions, it works. If it doesn't, try again with some other scheme. —Assistant Technical Editor.

Two Inexpensive Test Sets

(Continued from Page 32)

sealing wax poured into the base, thus filling it and holding the wires firmly in place.

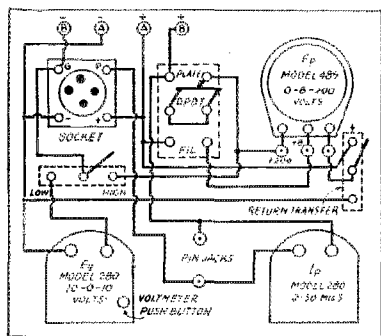
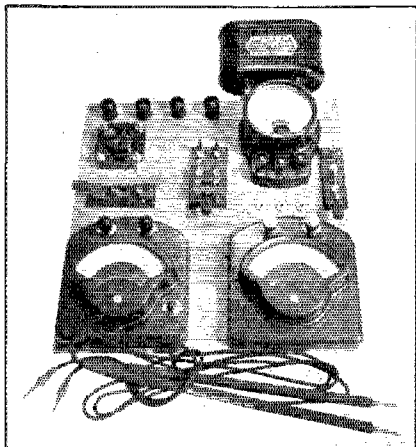


FIG. 2a

FIG. 2. THE NEW SET, ADAPTED TO THE HIGHER VOLTAGE TUBES ORDINARY RECEIVING TUBES AND TO THE UX-222 SCREEN-GRID TUBE.

The range of the zero-center grid bias instrument remains the same as in the small set but for some work could with advantage be extended by a multiplier or else replaced by an instrument capable of going up to 25 or 30 volts.

The switching system is such that all instruments are completely independent when the left hand switch is closed to the left and the others are open.

When working with a tube in the socket the left hand switch connects either the 10-0-10 volt or the 0-200 voltmeter between grid and minus A so that ordinary tubes, power tubes and the shield grid of the UX-222 may be handled. The right-hand switch permits the set to be adapted to receivers with return of B supply to either minus or plus A. The two-pole switch as before changes the two-range voltmeter from a filament voltmeter to a plate-voltage meter.

When using the meters independently the rubber-insulated prods are used, the terminals on the other end of the wires fitting either pin jacks or binding posts.

A voltmeter multiplier is shown above the set. This is not attached to the set normally but may be used to increase the range up to 500 volts so that the set will handle UX-210 tubes and everything below that.

After putting on identifying tags, the cords are braided together and placed on their proper terminals on the board. In use the suspected tube, or the tube in the suspected circuit is first placed in the test socket and the plug inserted in its place in the set. In this way it is possible to check readings for all the tubes or tube circuits under actual running conditions and if any of them doesn't show the necessary reaction it is a simple matter to run down the trouble. By placing the switch in the upper position we read the plate voltage, while the lower position gives the filament voltage. By disconnecting the first or grid lead at the top of the board we get the filament emission of the tube under examination on the milliammeter.

Recently I have added a second test board to my collection to take care of the necessary readings of the new 222 tube, together with other changes such as greater accuracy and polarity switches.

This set, illustrated in Fig. 2A is somewhat more complicated and constructed of more expensive instruments giving very accurate readings. It also differs from that shown in Fig. 1A by the addition of two single-pole double-throw switches; one of which is to change the grid meter from the regular one to the higher range meter in order to read the voltage of the shield grid of the 222 tube; the other switch changes the minus B line from plus to minus so that plate voltage will not be applied through the tube filament in sets which connect plus to minus and minus to minus.

The instruments in this latter set are as follows: E_p , plate voltmeter, Weston Model 489 high resistance 0-8-200, which may also be used for B Eliminator readings. E_g , grid voltmeter, Weston Model 280. 10-0-10. I_p , plate milliammeter, Weston Model 280, 0-50 mils. Figs. 1 and 2 illustrate the circuits of the two test sets.

Some of my friends who have built boards like mine have repeatedly told me that they were the best investment they have ever made, and do not know how they "ever kept house without them". So, in the hope that this meager contribution may be of some help to BCL members of the League I pass it on.

Strays

From 1BFX we get the following: "The wx changes for the better. Wonderful DX reception. The whole world coming in R7 to R9. Everything rosy.

"Antenna comes down, 203-A burns all to blazes, new Jewell milliammeter likewise annihilated and in the same breath my dog dies of nothing in particular. All in the space of forty minutes.

"Can you think of anything to add?"

"If You Only Try——"

By A. L. Budlong*

MANY amateur transmitters today appear to be troubled—or rather the neighbors are—with key-thumps. For the owners of such stations, the solution of a bad key-thump case here in Hartford may prove interesting.

The other day the secretary of the live-wire listeners' organization in this city called us to say that an amateur in a certain section of the city was causing a lot of interference. Would we, please, see if it could be remedied?

We would. A scouting visit by the writer showed that a five-watt transmitter was raising hob with BCL receivers over a radius of about a quarter of a mile. The broadcast receivers were all good ones,

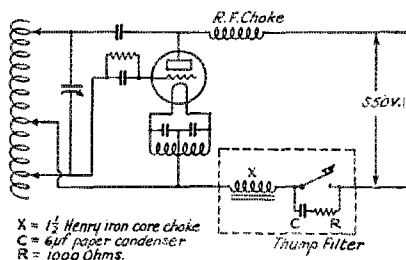


FIG. 1


which let them out. In spite of this, a key click emanated from the amateur station that was almost unbelievable in viciousness. At the house across the street—the worst place, naturally—a good broadcast receiver got tremendously loud clicks all up and down the dial, interfering even with the local broadcast station.

Several wavetraps gave zero improvement. Accordingly, armed with a suitcase full of miscellaneous apparatus, Handy and I went down a few evenings later to see what could be done to the transmitter. This proved to be a conventional Hartley affair, using a single 210 on 40 and 80 meters, with d.c. or r.a.c. on the plate. Key clicks were equally loud on either wave and with either type of plate supply.

We started in. Handy did most of the hard work, while the writer gained much exercise dashing across the street at frequent intervals to listen on the broadcast set there.

The key was in the negative supply lead.

The click, of course, is due to the sudden shocking of the tube caused by an instantaneous rush of high voltage to the plate. If we can slow that down a little, say to a thousandth of a second, we can



X = 1 1/2 Henry choke
C = 6 μf paper condenser
R = 1000 Ohms
C₁ = 2 μf paper condenser

FIG. 2


probably eliminate the click. A choke in the supply lead will have the desired slowing-down effect when the key is closed, but cannot be used alone, because when the key is opened the inductive kick from the choke will cause a stronger click to be radiated. We must incorporate an "absorber" for this click. A condenser across the key will do this and by leaving a small supply of energy to be fed to the plate after the key is opened a resistance (500 to 1000 ohms worked best) in series with the condenser will let the condenser discharge slowly, and thus avoid trouble there. We put up such a system, as shown in Fig. 1.

A trip across the street showed less QRM, but it was not eliminated. This wouldn't do at all, as we were after total elimination. Accordingly, we did what should have been done in the first place; that is, shifted the key to the center tap connection.

The same filter was duplicated here, as shown at Fig. 2, with the addition of a 2-μfd. by-pass condenser across the choke, since the filter was now in the r.f. circuit also. This was fine. Listening all up and down the scale on the broadcast set failed to reveal a trace of thump, click or note. This was on 40 meters. We went to 80, and shoved the coupling as tight as possible. R.a.c. went on the plate. Still no trace of interference. The click was wiped out.

*Asst. to the Sec'y, A.R.R.L.

This was all very well, but the filter consisted of Handy's parts, and he wanted them. We could have specified a duplicate installation and let the owner buy the parts but that would take time. It was decided




$X = 30$ Henry "B" eliminator choke
 $C = 2 \mu\text{f}$ paper condenser

FIG. 3

to see if there was any material around the station that would provide a satisfactory substitute.

There wasn't much in the way of spare apparatus. Sorting through the junk-box produced one 30-henry "B" eliminator



$X = 30$ Henry "B" eliminator choke
 $C = 2 \mu\text{f}$ paper condenser
 $C_1 = \text{"burn" } 1 \mu\text{f}$ paper condenser

FIG. 4

choke, a good 2- μf . paper condenser, and a doubtful one-mike condenser. This was a far cry from the original filter system, comprising a 1½-henry choke, a 2- μf . condenser, a 6- μf . condenser and a 1000-ohm resistance, but we had hopes.

As a starter, the choke was put in the lead, but with no condenser around it. It was hoped that the distributed capacity would be sufficient to by-pass the r.f. The one good condenser went across the key. Fig. 3 shows it at this stage. When the set was operated, we could hear no thumps, but checking on the short-wave receiver showed that the tube was blocking at intervals of about a 50th of a second. Clearly, the choke was not satisfactorily by-passing the r.f., as we had hoped it would.

The good condenser was therefore put across the choke, and the leaky 1- μf . condenser across the key, getting the combination shown at Fig. 4.

This proved to be absolutely as satisfactory as the more complicated filter in Fig. 2. Forty or eighty, loose or tight coupling, and r.a.c. on the plate—it made no difference. The click was gone, and as far as we know the installation is still operating satisfactorily.

The amateur now knows he can operate at any time without incurring the wrath of the whole neighborhood, and the neighbors have softened in their attitude toward amateur radio—and are not sending complaints to the Federal Radio Commission.

Not the least valuable feature of the case, however, is the demonstration of the fact that a thump filter can be made of parts with a wide variation from the "ideal" constants, and still do the work for which it is intended.

Official Wavelength Stations

THE Official Wavelength System furnishes a service cooperative with, but differing from, that of the Standard Frequency Stations 9XL and 1XM, which are also operated in accordance with plans made with the O.W.L.S. Committee. Contact with the O.W.L.S. is through Mr. D. C. Wallace, 6AM, who is also chairman of the committee. Mr. Wallace is continuing the practice of checking up all O.W.L.S. to make sure that they are really indicating their wavelength (or frequency) at the end of each transmission—and are doing so with proper accuracy; which is to say 2%. They do this in the course of regular operation and do not send calibration schedules as do the S.F. stations.

The list is as follows:

1AAC, 1AVW, 1AWW, 1BHW, 1BZQ, 1CCW, 1CK, 1KP, 1ZL, 1ZO, 2CLA, 2DS, 2MU, 2SZ, 2XL, 3APV, 3BE, 3XW, 4LK, 5XBH, 5ZAV, 6AKW, 6AM, 6BB, 6BCP, 6BGM, 6BMW, 6BQB, 6CAE, 6CMQ, 6CVO, 6LJ, 6QL, 6SX, 6TI, 6TS, 6XAG, 6XAO, 6ZE, 6ZZH, 6ZV, 7AGI, 7BE, 7BU, 7GQ, 7NX, 7QK, 7XF, 7ZX, 8AA, 8APZ, 8BAU, 8BZT, 8EQ, 8GU, 8GZ, 8XC, 8ZG, 9AXQ, 9BCH, 9BGK, 9BMR, 9CPM, 9CXU, 9DXN, 9EFO, 9EGU, 9ELB, 9FF, 9IG, nc1AE, nc2BE, nc3CO, nc3NI, nc3FC, nc4BT, nc9AL, eg2OD, eg2SE, Ireland 5NJ, oa2CM, and oz2AC. Crystal Controlled O.W.L.S.: NKF, 1AXA, 2BO, 2BRB, 2EF, 2WC, 4BY, 4XE, 6AOI, 6DLL, 8CMM, 8DAJ, 9AUG, 9BVH, 9UZ-NRRL, 9ZA, eg2NM, eg5LF and oa5BG. Standard Frequency Stations: 1XM and 9XL.

Radio Applied to Petroleum Prospecting

By Gerald R. Chinski*

AS the subject about to be discussed is probably more or less unfamiliar to most of the radio fraternity it will be well to begin with an explanation of petroleum prospecting by the seismic method.

The so-called "Seismic Method" is a term applied by Seismologists and Geologists to the use of the seismograph as a means of locating underground deposits such as minerals, sulphur, and petroleum. It has been only since the World War that this method has been used to any extent in the petroleum field. As a matter of fact, war time developments on the seismograph as a means of locating big guns greatly facilitated its later use in more peaceful pursuits. Let us say here that it is not to be understood that this is a "sure fire" means of locating petroleum deposits anywhere. It is not. Very much depends upon the accuracy of observations and correct interpretations of records obtained as well as the geological conditions of the locality being sounded. And now with the aid of a few figures we will endeavor to explain the operation of this method.

In Figure 1, we have the essential apparatus for making a seismograph record. "C" is a camera carrying a strip of sensitized paper (similar to a moving picture camera) which moves past an aperture, accurately, at a known rate of speed. "C" also contains a source of light "L" which is projected through a narrow slit in order to make it produce a sharp light line on the sensitized paper, to which it is subsequently reflected. "S" is the seismograph itself which is equipped with a mirror system on its moving elements. The function of the mirror, of course, is to reproduce its movement on the sensitized paper by means of varying the angles of incidence and reflection of light from "L". The idea in placing "S" at a distance from "C" is, naturally, to obtain an amplified reproduction of the movements of "S".

The seismograph "S", being a mechanical instrument, receives its actuating energy from vibrations transmitted through the earth. It might be well to say here that most seismographs used in this kind of work are of slow vibration period. "O" is a simple electric oscillograph connected to the output of a radio receiver "R". This instrument in usual practice is nothing more than a telephone or loudspeaker unit equipped with a mirror system similar to

that of the seismograph, and made as sensitive as possible to actuating energy consistent with good results. It is usually mounted next to the seismograph and re-

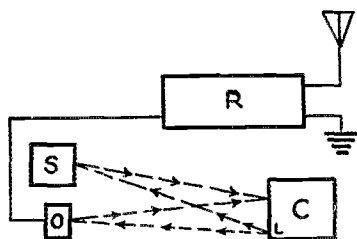


FIG. 1

fects an image on the sensitized paper in "C" next to the image cast by the seismograph mirror. To complete the setup arrangement necessary to take a record one more thing must be mentioned, and that is the "timing device". This is installed in the camera "C", and usually is operated from the spring motor which is used to move the sensitized paper past the aperture. A pendulum swinging at a very uniform, predetermined rate, opens and closes a narrow slit between the light source "L" and the sensitized paper.

As time in this work is figured to one-fifth of a second, usually it is necessary

1. The seismograph (pronounced *sis mo graff* or *sis mo graf*) is a device originally used for recording earthquakes of a mild or distant sort. The general scheme is that a large weight is flexibly supported in a frame which is secured to a heavy pedestal resting on the earth. If an earth tremor comes along the frame is shaken but the weight is held still by inertia. The relative motion between the moving frame and the stationary weight is used to operate a recording pen which marks on a moving film or smoked paper a line that later tells the observer what happened.

Many seismographs are operated year in and year out at government and school stations and the records obtained are such that it is usually possible to tell from the record of a single seismograph what the approximate distance and direction of a quake was, even though it is almost on the opposite side of the earth. Study of the records has taught us something about the inside structure of the earth—of which we know little enough.

Roughly the classes of seismographs are those which record vertical vibrations and those which record horizontal ones. The latter are almost invariably operated in pairs, an east-west one and a north-south one. To prevent recording local disturbances the machine is usually located away from traffic and the supporting pillar is carried through a sort of well to deep-lying rock or shale.—Tech Ed.

*Foley Bros. Radio Dept. Formerly with Roxana Petroleum Co. Radio 5CA, 1919 Harold Ave., Houston, Texas.

to have five exposures per second in the timing line on the record. A record taken of the timing line with the seismograph and oscillograph mirrors idle would appear as in Figure 2.

To prevent any exposure on the record except that which is wanted, the entire ensemble of apparatus and the operator are placed in a tent lined with red bunting to




FIG. 2

make it light proof. Some use has been made of a dark tunnel between camera and seismic and oscillograph mirrors, but the tent has been found much more practical.

Thus we have outlined the recording station. In actual practice, several of these stations are used simultaneously. We will now outline the "shooting station".

The "shooting station" consists of a planted charge of dynamite and a radio transmitter. The quantity of dynamite used is dependent upon the distance between the shooting station and the farthest recording station as well as the geological condition of the earth intervening. In the Gulf Coast section of Louisiana and Texas, a charge of about 250 pounds of 60% gelatin is probably the average. In some cases, however, as much as 500 or 600 pounds is necessary. The distance between shooting and seismograph stations varies between two and eight miles.

The radio station is located some 750 feet from the charge, or "shot point". The charge is planted from ten to fifteen feet in the ground. This is done primarily to obtain maximum energy dissipation into the earth and secondarily for safety. In spite of precautions, some very large clods are thrown high into the air to curve downward and land with a vicious thud entirely too near the radio car, for one to feel absolutely safe. Once in a while a direct hit is made, which generally results in more or less damage. If the radio man and the dynamite crew are not good at dodging, they hide out under the cars. When no cars or other shelter are at hand, dodging is quite the thing. One soon becomes rather adept at the art of dodging. Very often, locations are made where it is impossible to take automobiles, such as up canals and bayous into swamps and marsh land. In such cases only that which is absolutely necessary for the station to function is taken along. One would gather from this that the very lightest equipment consistent with good results is highly desirable,

which is certainly the case. Much more could be said along this line, but we will leave that for some other time and return to the subject under discussion.

A system is provided which will detonate the dynamite charge and break the radio signal at *practically the same instant*. A lag of more than one-fifth of a second in the system would render the records worthless unless it were known and constant. In that case of course it could be taken into consideration in the later record calculations. The most simple and best system with which the author is familiar will be explained.

The dynamite is always exploded electrically and the best grade of standard electric blasting caps is used. It has been found that if the caps are fresh and in good condition they will explode very uniformly at the same current flow. Thus one extra cap is included in series with the detonating system, as in Figure 3, the function of which is to break the negative lead of the "B" potential supply to the radio transmitter when it explodes. The regular magneto type of detonator is used because

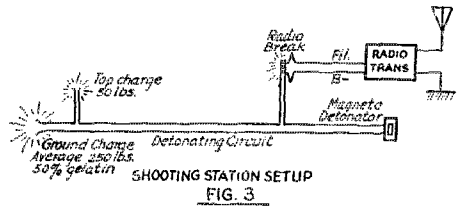


FIG. 3

it is the most dependable and because it is much safer than a battery. It will be noticed in Figure 3 that a third electric blasting cap is connected in the detonating circuit. This is used to explode an additional 50 pounds of gelatin located at the "shot point", but not buried. It is called the "top" or "sound" charge, and its purpose will be explained later.

We will now take up the method of operation. In Figure 4 we have only included one recording station, as this is all that is necessary to explain the operation. A constant and modulated radio signal is being received at the recording station from the radio transmitter "T", at the shot point. This signal actuates the oscillograph at "R", producing a widening of the band of light appearing on the sensitized paper. A record of this addition on the paper would appear as in Figure 5a. This signal continues for a few minutes before the dynamite is exploded at the shot point.

About fifteen seconds before the scheduled time for the shot, the operator starts his camera and releases his seismograph mechanism so it will be free to vibrate when the earth wave arrives. He then remains

absolutely silent until the record has been made. First the radio signal stops, signifying that the charge has been exploded. A sharp break occurs on the record as in Figure 5b, when the oscillograph mirror returns to rest. The paper moves on through the camera and in a few seconds there is a wavering of the light beam making the seismic line on the record. This indicates that the earth wave set up by the dynamite explosion has arrived. The record is then complete provided that the exact distance between the shot point and the recording station is known. This can either be determined by surveying or by use of a pressure detector. The latter is used more extensively now as it does away with the expense of the former, which was a large item in this work. When the cone type seismograph is used it makes a very satisfactory pressure detector in itself. This simplifies things in that the same mirror system which registered the arrival of the earth wave also registers the arrival of the pressure wave through the air. The pressure wave arrives after the seismic "kick" has been recorded. In this way there is no confliction. The "top charge" formerly referred to, creates this pressure wave when it is detonated simultaneously with the ground charge. The result on the record would appear as in Figure 5c. Now we come to the point of explaining what all of the foregoing discourse really means.

In the first place, the whole thing hinges on the fact that a wave travelling through the earth will increase in velocity when encountering some harder substance such

as rock or salt formations. Now the presence of a "salt dome" is usually indicative of a petroleum supply in the Gulf Coast section of the United States. As there are no rock or other particularly hard formations here, seismograph results are considered quite accurate. The velocity of the wave through ordinary earth, that is, unaided by harder formations, is known and taken as a standard. If it is found, from inspection of the records, that the velocity of the wave has increased, the results are interesting. Repeat records are then made, and if no error is found, the presence of a "salt dome" is assumed. Its extent and form are then attacked by use of the seis-

mograph, but we will not go into an outlining of the dome.

In Figure 6 we represent a complete record. It will be noticed that at "a" we have the "radio break", indicating the exact time the dynamite charge at the shot point went off. At "c" we have the arrival of the pressure wave indicated. The "timing line" furnishes an accurate check of the time elapsing between "a" and "c". Correcting for temperature and atmospheric pressure, the exact distance between the

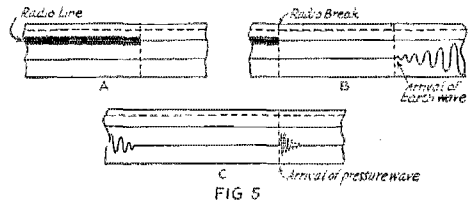


FIG 5

shooting station and the recording station can readily be computed. The space "a" to "b" on the "timing line" indicates the lapse of time between the "shot" and the arrival of the seismic wave. Knowing the distance and the length of time taken for the wave to arrive, it can then be determined whether or not there has been an increase in the velocity.

Next in importance to the seismograph, in this work, is the radio system. Without an absolutely accurate check on the time of explosion, the records would be worthless. As radio provides this check in a more practical and economical manner than any other method yet employed, its use is almost exclusive. While some exploration parties use only one-way communication, that is, a transmitter at the shooting station and a radio receiver at each of the recording stations, many now employ a two way system. The latter is obviously better despite the fact that it increases, somewhat, the over all weight of the apparatus to be transported, as it greatly facilitates the work of the party. In the former system all work, naturally, must be conducted on schedule. This is a great disadvantage, because in some cases it may be impossible for one or more of the recording stations to make location on time, due to some unforeseen difficulty. Again, all the recording stations may make location ahead of schedule and have to wait until the specified time to function. All of this means a big loss of time, as well as the frequent loss of records. Where two-way communication is used, the additional investment in radio equipment is amply repaid in a decrease in the number of records lost, as well as the added convenience.


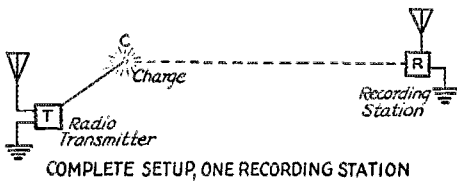


FIG. 4

COMPLETE SETUP, ONE RECORDING STATION

Much can be said of the design of radio equipment for this purpose, and if there appears to be sufficient interest in this line, we may take the matter up in another article. The conventional regenerative detector and two-stage audio amplifier sums up most of the receivers used, although late developments have actually brought about the production of a better set for the purpose. With the coming of the new screen-grid tube into general use, in this country, greater developments may be looked for in radio sets designed for this, as well as general broadcast work. Frequencies around 3,000 kilocycles are used extensively, and the development of a really efficient tuned radio frequency amplifier, at this wavelength, will mean much. Up to date, the author has found a simple superheterodyne receiver, employing one intermediate frequency stage with sharply tuned filter, using grid detection in both detectors plus regeneration in the first, to be much better for the purpose than any system he has yet seen. It does not seem at first thought that, for transmitting a signal over a distance of not more than




COMPLETE RECORD
FIG. 6

eight miles, either a powerful transmitter or a sensitive receiver would be necessary. As a matter of fact, this is neither right nor wrong. In the first place, the antenna input at the transmitter rarely exceeds 15 watts, and it is continually sought to reduce this by increasing receiver sensitivity. When working in the open, a fifteen watt antenna power 80% modulated and an ordinary regenerative detector and two stage audio receiver is satisfactory, but often when in wooded sections it is almost impossible to obtain a readable response on the record. Incidentally, it is highly desirable to be able to modulate the antenna input 100%. "Wobulation" is caused, which tends to broaden the wave. This is desirable, however, as it makes for easy and quick tuning at the receiver, eliminating necessity for crystal control. Distortion amounts to nothing in results as long as the voice is intelligible. Figure 7 shows a schematic diagram of a field transmitter which the author has designed and found meets all requirements quite successfully.

The oscillatory circuit is tuned plate and grid which is familiar to all. Heising modulation is used. The constant current choke is the primary of the transformer T. Now, as it can be seen, this transform-

er also serves as an audio oscillator inductance when switch S is on tap No. 2, converting the modulator circuit into an audio oscillator. The primary of transformer T being the constant current choke as well as the plate inductance of the modulator tube, acting as an audio oscillator, the process of modulation is unchanged. Transformer T is designed to have an oscillating period of about 250 cycles with a minimum of distributed capacity. A greater bias voltage, as indicated at B2, is necessary when the modu-

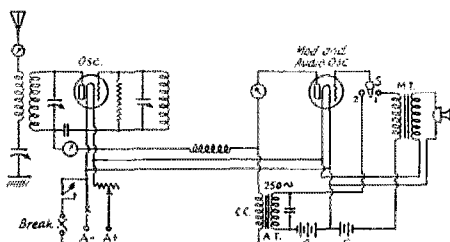

TRANSMITTER
SCHEMATIC
FIG. 7

lator tube is acting as an audio oscillator to keep the input normal. An audio component of very steady frequency is secured and the radio output can be modulated 100%. Voice is used merely for convenience.

A.R.R.L. Technical Information Service Rules

Please help us by observing the following rules:

1. Keep a copy of your questions and diagrams and mention that you did so.
2. Number the questions and make a paragraph of each one.
3. Make diagrams on separate sheets and fasten them to the letter.
4. Print your name and address (not merely your radio call) on your letter. Don't depend on the return address on the envelope as this is destroyed when the letter is opened.
5. Don't ask for a comparison of the various manufacturers' products.
6. Before writing, search your files of QST—the answer probably is there.
7. Address all questions to Information Service, American Radio Relay League, Inc., 1711 Park Street, Hartford, Conn.
8. It is not essential to enclose an envelope as long as you supply postage and PRINT CLEARLY your name and address on your letter.

The DX Tape Measure

By Allen H. Babcock*

HOW FAR IS IT? This is the first thought when a really DX contact is made. Any one who has a working knowledge of Spherical Trigonometry will find the answer without my help; but so grave are my doubts that the average Ham ever can find an answer even approximately correct by the help of any one of the articles on this subject which have come under my notice, that I am now moved to break into print with what seems to me to be a complete answer in the form that will yield results in every case.

The only requirements are: the geographical positions of the two places; the ability to substitute these angles in the formulas that will be given; sufficient knowledge of Logarithmic and Trigonometric Tables to find the values of the functions given in the formulas; and finally, the comparatively rare ability to follow directions accurately, and to work without errors.

Geographical position is given as the latitude and longitude of the place expressed in degrees, minutes and seconds of arc. The seconds may be neglected in this kind of a problem. The latitudes, and the difference of the longitudes give two sides and the included angle of a spherical triangle, from which the side opposite the known angle can be computed; which is the distance between the places expressed in degrees and minutes. Since one minute of arc equals one nautical mile, (often wrongly called a knot), if the degrees are multiplied by 60 and the minutes added, we have the distance in sea miles; and since one sea mile equals 1.15 statute miles we have only to multiply again by this figure to get the answer we require.

There will be four possible cases:

1. Latitudes of the same name, that is, both north or both south, and the longitude difference less than 90°.
2. Latitudes of opposite names, one north and one south, and the longitude difference less than 90°.
3. Latitudes of the same name, and the longitude difference greater than 90°.
4. Latitudes of opposite names, and the longitude difference greater than 90°.

The first step is to find the longitude difference by subtracting the less from the greater if both are east or both west. If one is east and the other west, add them. If the sum is less than 180°, use it; if the

sum is greater than 180°, subtract it from 360° and use the remainder.

Let a = the latitude of the place nearer the pole.

(You may work from either pole.)

b = the latitude of the other place.

C = the longitude difference.

c = the distance required.

CASE 1

It is required to find the distance between San Francisco, 37° 48' North, 122° 23' West, and an island in the Pacific at 14° 02' North, 171° 20' West. Here a = 37° 48', b = 14° 02', and C = 48° 57'.

$$\cos c = \sin a \sin b + \cos a \cos b \cos C$$

$$\log \sin 37^\circ 48' = 9.78739$$

$$\log \sin 14^\circ 02' = 9.38469$$

$$\text{antilog of } 9.17208 = 0.14862$$

$$\log \cos 37^\circ 48' = 9.89771$$

$$\log \cos 14^\circ 02' = 9.98684$$

$$\log \cos 48^\circ 57' = 9.81738$$

$$\text{antilog of } 9.70193 = 0.50342$$

The angle whose Nat cos is 0.65204 is 49° 18'.

Then (49 x 60) + 18 = 2958 nautical miles or 3406 statute miles.

CASE 2

Required: the distance between a point in 37° 48' N, 139° 43' W, and another place in 14° 02' S, 171° 20' E. The sum of the longitudes is 311° 03', which subtracted from 360° leaves 48° 57'. Here the values of a, b, and C are the same as in Case 1, but because the latitudes are of opposite name the formula now becomes,

$$\cos c = \cos a \cos b \cos C - \sin a \sin b$$

$$\log \cos 37^\circ 48' = 9.89771$$

$$\log \cos 14^\circ 02' = 9.98684$$

$$\log \cos 48^\circ 57' = 9.81738$$

$$\text{antilog of } 9.70193 = 0.50342$$

$$\log \sin 37^\circ 48' = 9.78739$$

$$\log \sin 14^\circ 02' = 9.38469$$

$$\text{antilog of } 9.17208 = -0.14862$$

The angle whose Nat cos is 0.35480 is 69° 13'

Then (69 x 60) + 13 = 4153 nautical miles or 4782 statute miles.

*6ZD; A.R.R.L. Director, Pacific Division, 65 Market St., San Francisco.

If b and C become large enough, the second term will become larger than the first so that the difference will become negative. In this event the angle taken from the tables must be subtracted from 180° and this remainder will be the distance required. For example: if the two latitudes were $37^\circ 48' N$ and $37^\circ 40' S$, and the longitude difference 85° , $\cos c$ would be -0.29808 , the angle corresponding to which is $72^\circ 39'$ and this subtracted from 180° leaves $107^\circ 21'$, which is the distance required.

CASE 3

Required: the distance between a point in $52^\circ 30' N$, $34^\circ 59' E$, and another place in $18^\circ 30' N$, $149^\circ 20' E$. The longitude difference is $134^\circ 30'$. Our tables of functions of angles do not cover angles more than 90° , so that we must subtract 90° from this, which leaves $44^\circ 30'$ as the value of C in the formula. Also we must take out the sine of C instead of the cosine, and put the minus sign before this term in the formula. We have then, $a = 52^\circ 30'$, $b = 18^\circ 30'$, $C = 44^\circ 30'$.

$$\cos c = \sin a \sin b - \cos a \cos b \sin C$$

$$\log \sin 52^\circ 30' = 9.89947$$

$$\quad \quad \quad \log \sin 18^\circ 30' = 9.50148$$

$$\text{antilog of } 9.40095 = 0.25174$$

$$\log \cos 52^\circ 30' = 9.78445$$

$$\quad \quad \quad \log \cos 18^\circ 30' = 9.97696$$

$$\log \sin 44^\circ 30' = 9.84566$$

$$\text{antilog of } 9.60707 = -0.40464$$

The angle whose Nat cos is -0.15290 is $81^\circ 12'$, which must be subtracted from 180° because of the minus sign, leaving $98^\circ 48'$. Then $(98 \times 60) + 48 = 5928$ nautical, or 6826 statute miles, is the distance required.

CASE 4

Required: the distance between a point in $52^\circ 30' N$, $14^\circ 50' E$, and another place in $18^\circ 30' S$, $149^\circ 20' W$. The longitude difference is $164^\circ 10'$, from which 90° must be subtracted as in Case 3, so that $C = 74^\circ 10'$ while $a = 52^\circ 30'$ and $b = 18^\circ 30'$. Since the latitudes have opposite names the sine term of the formula becomes negative, as in Case 2; and since the longitude difference is more than 90° the cosine term becomes negative, as in Case 3, and the formula now is,

$$\cos c = -\sin a \sin b - \cos a \cos b \sin C$$

$$\log \sin 52^\circ 30' = 9.89947$$

$$\quad \quad \quad \log \sin 18^\circ 30' = 9.50148$$

$$\text{antilog of } 9.40095 = -0.25174$$

$$\log \cos 52^\circ 30' = 9.78445$$

$$\quad \quad \quad \log \cos 18^\circ 30' = 9.97696$$

$$\log \sin 74^\circ 10' = 9.98320$$

$$\text{antilog of } 9.74461 = -0.55540$$

The angle whose Nat cos is -0.80714 is $36^\circ 11'$, which must be subtracted from 180° as in Case 3, leaving $143^\circ 49'$. Then $(143 \times 60) + 49 = 8629$ nautical, or 9936 statute miles, is the distance required.

All these formulas have been derived from the one fundamental sine-cosine expression of spherical trigonometry, transformed to suit the individual cases, as follows:

$$\cos c = \cos a \cos b + \sin a \sin b \cos C.$$

C is the angle at the pole between the two meridians that pass through the two places, a and b being the lengths along the meridians from the pole to the places; in other words, their polar distances. The latitudes, being measured from the Equator must be subtracted from 90° to get the polar distances, or, what is the same thing, we may use them as given if we take the complimentary function values from the tables, provided all the angles are less than 90° . Our formula for Case 1 therefore becomes:

$$\cos c = \sin a \sin b + \cos a \cos b \cos C.$$

In Case 2, we have one side greater than 90° by just the amount of latitude given. In this Case the angle C was at the north pole, and the south latitude was $14^\circ 02'$, which is distant from the north pole 90° to the Equator plus $14^\circ 02'$, or $104^\circ 02'$, and the cosine of $90^\circ + 14^\circ 02'$ equals $-\sin 14^\circ 02'$; also $\sin (90^\circ + 14^\circ 02')$ equals $\cos 14^\circ 02'$; and the formula becomes:

$$\cos c = -\sin a \sin b + \cos a \cos b \cos C.$$

In Case 3, the angle at the pole is greater than 90° . As stated in the preceding paragraph, $\cos (90^\circ + x) = -\sin x$; hence 90° was subtracted from the longitude difference, $\sin (C - 90^\circ)$ was taken from the tables, and the second term was given the minus sign, which made the formula:

$$\cos c = \sin a \sin b - \cos a \cos b \sin (C - 90^\circ).$$

In Case 4, the first term is the same as that term in Case 2, and the second term is the same as that term in Case 3, for the same reasons. The formula then is:

$$\cos c = -\sin a \sin b - \cos a \cos b \sin (C - 90^\circ).$$

By using these four formulas as directed, the distance between any two points on the Earth's surface can be computed.

The Design of Variable Condensers for High Voltage Operation

By Bert E. Smith*

THE extended adoption of increased power by radio stations utilizing vacuum tube transmitters, whether commercial, broadcast, or amateur, has caused a corresponding demand for apparatus of all kinds designed to operate with maximum efficiency at the increased potentials thus made necessary.

The most difficult instruments to coordinate properly with the high power required are those which operate in such portions of the circuit as carry radio frequency currents. The potentials which these must withstand are frequently extremely high, and the currents also reach, comparatively speaking, immense values. Even small losses accordingly become of extreme importance and must be avoided or minimized with great care.

These circuits consist almost entirely of inductances and capacity, resistances in a properly built set being of a very low order, and this fact makes the reduction of condenser losses an important problem.


The general qualifications of variable condensers for such use are the same as the essentials of a good condenser of any variety—the requirements are very similar to those for ordinary receiver tuning controls. That is, they must be mechanically good, having ample strength to withstand mechanical stress, the bearings must be easy running and capable of unlimited use without perceptible wear, and the electrical characteristics must be as nearly perfect as possible. In order to carry high potentials successfully some dimensions must be comparatively large and the increased weight resulting from this size necessitates a correspondingly increased strength of frame construction.

Let us look first to the end plates. The usual stamped end plates used in receiving condensers and low power transmitting condensers become impracticable, as their strength is insufficient to keep them absolutely rigid under all circumstances and the least bit of end play which might develop under continued use might prove fatal to the alignment of the plates. It becomes necessary therefore to cast them, and a great deal of care must be taken and experimenting accomplished before they can be made dependable. Lightness demands that the material be not too thick, and strength requires thickness in some places, so a ribbed

design has been adopted by some manufacturers as giving the maximum resistance to mechanical stresses combined with the minimum amount of metal.

The same conditions dictate that there must be at least three substantial supports between the front and rear end plates.

The plates must be of sufficient thickness to prevent perceptible vibration and the rotor shaft must be large in diameter in

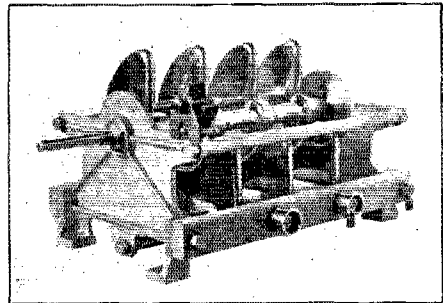

A NEUTRALIZING CONDENSER

Note the unusual thickness of plates, and the shields around the stator support screws. Several of these are used in the trans-Atlantic Telephone Station at Rocky Point, L. I., for neutralizing the R. F. amplifiers.

order to give the proper support to the heavy plates. Following the same line, unusually large and carefully constructed bearings become essential. At one end of the shaft a shoulder bearing can well be worked in to control alignment against a ball thrust bearing at the opposite end. This bearing should have only one job—that of supporting the rotor plates, and should be entirely independent of the electrical connection between the rotor and frame.

The introduction of the current into the rotor can be by various means. We have just eliminated the route through the bearings—the necessity for proper lubrication introduces an element of uncertainty in resistance which makes this method absolutely impracticable. The next thought is a pigtail, but due both to its tendency to wear and the possible variation in inductance, this also is ruled out. The third and most practical means is to attach to the rotor a heavy brush which operates against a special contact ring on the end plate, and as size is comparatively no object, sufficiently heavy

*Allen D. Cardwell Mfg. Co., 81 Prospect St., Brooklyn, N. Y.

material can be used here to insure the retention of pressure indefinitely.

The question of supporting the stator is so closely linked up with the electrical characteristics that we shall go into it later when dealing with them. The one important requirement is the method of mounting securely the huge mass of metal we have


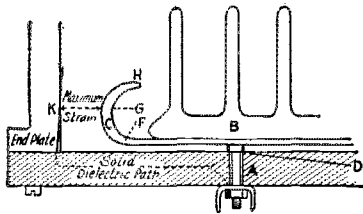


FIGURE 1

obtained. This is among the least of our difficulties—brackets of substantial size can be made integral with the supporting posts, and arranged for attachment to a panel, or by means of mounting feet built into the end plates, the condenser can be attached to a baseboard.

From the electrical view point the problem of design is tremendously more complex. Electrostatic fields which are of negligible strength in condensers for low voltages, become of great significance, and

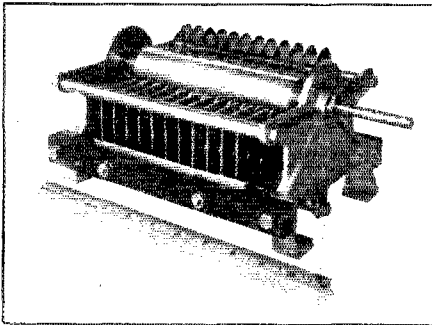

A STANDARD MODEL WITH A VOLTAGE BREAK-DOWN APPROXIMATING 7500

This is the type usually used by ordinary 500 watt broadcasting stations, and in most amateur installations exceeding a quarter kilowatt. A similar model with a split stator is employed by the R. C. A. and its affiliated companies for experimental short wave transmission, both telephone and c.w. By placing the two stators in series a voltage breakdown almost double the original is obtained.

many weaknesses which would be imperceptible under any ordinary circumstances manifest themselves immediately.

Insulators and conductors obtain their characteristics purely through the properties of their molecular structure. Where

some electrons in the atoms composing the material are free, the material is a conductor. In non-conductive material, so called, we have electrons which are not free. They are so tightly bound that only extreme electric pressure can dislodge them, although the structures themselves may be forced out of shape.

Such materials as hard rubber, air, bakelite, pyrex, et cetera, are of this type. There are practically no free electrons in insulators, although electric pressure can be applied, and the resulting field noted at a distance in the insulator, much in the same manner as a group of billiard balls may transmit the power of the impact from the cue ball without moving themselves. It is by distorting the normal component of these atoms in the dielectric that we can make a condenser store electrical energy.

The rapid reversal of the pressure in a dielectric will cause more or less heating effect according to the resistance which the




FIGURE 2

electrons of the dielectric oppose to having their normal positions shifted. If the impressed voltage is too great it may force a discharge through the dielectric. This may manifest itself as a spark discharge which will actually puncture the dielectric, or may show up merely as leakage. Air is of such a nature that this leakage is almost impossible and any breakdown will be by means of a flashover, whereas in a solid dielectric the leakage loss is always present.

The next effect to be observed is that some current may be dissipated through the resistance of the plates. As previously observed, this is not likely to amount to much.

A third loss, hysteresis, is caused by the delay of some poor dielectrics in returning the atomic structures to their normal positions, causing a similar delay in delivery of the stored charge. When we are working with frequencies of ten million alternations or thereabouts per second the elimination of this delay becomes of great importance.

It becomes obvious that if air, which is practically perfect and has no appreciable losses, can be utilized as the dielectric, we will have a condenser with no important losses. Unfortunately, however, we cannot

use air to support each stator section and we must utilize a solid insulator for this purpose. It is also quite apparent that if we can keep this supporting material entirely outside of the electrostatic field it will not cause any additional losses.

Another property of dielectrics is the dielectric constant. This is entirely independent of the loss factor and varies from unity with air to as high as sixteen with celluloid. In other words it takes one sixteenth as thick a body of air to cause a condenser to have the same capacity as would be the case if celluloid, having a dielectric constant of sixteen were used. Hard rubber has a dielectric constant of two or three. Pyrex has a value of approximately six. Bakelite varies from four to eight.

In order, therefore, to transfer the dielectric strain as much as possible from the solid to the air it is necessary for the path through the insulation to be at least as great as the average air distance multiplied by the dielectric constant of the insulation. That is, if hard rubber is used the distance through the hard rubber must be more than twice that of the air separation, and if pyrex is used it must be more than six times the air distance.


Let us now refer to Figure 1, which shows the method of stator support. The main block B which supports the stator is held away from the strip of insulation A except at the points of actual support C. This serves the double purpose of interposing an air path between the conductor and dielectric and of removing the dielectric just a trifle further from the field. This construction is sufficient where comparatively low potentials are encountered, but where the electro-motive force is of a higher order even further precautions become necessary.

It is a well known fact that the density of electric charge on a conductor is greatest when the exposed curvature is sharpest. If we apply this principle to the metal of a condenser we will find that there is a higher density of charge at all corners and projections than at points where the surfaces are flat or slightly rounded. For this reason it becomes advisable to reduce these areas of excessive pressure by removing them, which may be done by carefully rounding off all corners, keeping the radius of the surface at half the thickness of the conductor. For the same purpose all parts subject to strain should receive a high polish, in order that there may be no points or irregularities from which a brush or spark discharge can take place.

We have already mentioned the necessity for a complete removal (or as complete as possible) of the solid dielectric from the electric field. Referring again to Figure 1, it will be noted that the stator supporting block B is covered by a curved shield C, and

once again between this shield and the dielectric support A there is interposed an air space. The only points of contact between the electrode and the solid insulation are at the points where the supporting screws pass through the insulation, and even here that part of the screw which passes through the insulation is highly polished, and a minute air space surrounds it except where the spacing washer "D" and the nut are attached.

On the shield block C the only sharply curved portion is at H, and since this points back toward the structure B and is at the



A SLIGHTLY LARGER MODEL BUILT FOR A 1-Kw. BROADCASTING STATION TANK CIRCUIT

The capacity of this is about 200 picofarads at a breakdown around 10,000 volts.

same potential as B, the tendency to form a brush discharge is greatly reduced. The part that comes nearest to the end plate K is so slightly curved that here, when the exposed electric field is greatest, the danger of discharge with the air is minimized.

As long as the maximum dielectric strain is across K G, if we maintain a much longer path through the solid dielectric we may eventually reach a point in which we could use any of the so-called insulators regardless of the poorness of their quality. Nevertheless, the better the dielectric, the less will be the loss from heat generated by hysteresis, and the safer we will be from mechanical trouble in our insulators.

If we drive two rods into a box full of moist earth and connect a source of current to them we shall find that we have a definite amount of current flowing between them. If we now remove say three quarters of the earth in the box we shall find that our current is smaller than it was before. A somewhat similar condition is found in the insulation used on the condenser. It may seem a poor analogy at first glance because the moist earth is quite obviously a conductor and the insulation material on the

(Continued on Page 66)

Experimenters' Section Report

THE following is the third of the Experimenters' Section progress-reports announced in the last issue. More are to follow in early issues.


A Portable Transceiver

By Herman Radlofi*

I TRIED to write a complete resumé of my 5 years of dabbling with the problems and pleasures of portable stations but on reviewing the result of my efforts I was positive that a few general statements and a description of my present outfit would be of more practical value.

There are many situations in which one sees an opportunity to use a portable station to advantage and although the general problem remains the same the actual set


ductances and that space is allowed in the outer cabinet. The inductances plug in; pup jacks are used. It is convenient to be able

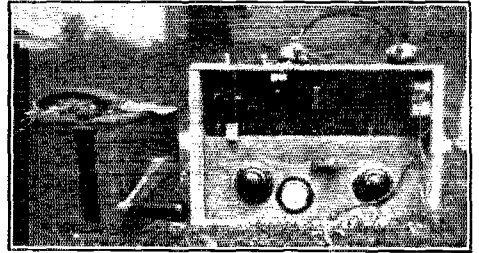

THE SET READY FOR THE ROAD

The outer case carried the set with coils and tube in place. The receiver B battery is the white object at the upper right.

At the left is the "Megger" which is used as a power supply.

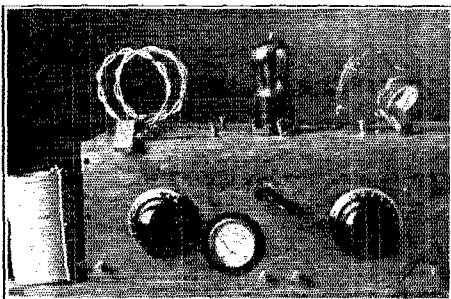

FRONT VIEW OF THE "TRANSCEIVER" IN ONE OF ITS MANY DIFFERENT FORMS.

Some of the preliminary coils are shown. The transmitting circuit is at the left, the receiving circuit at the right. The handle at the top center operates the send-receiver switch. The 0-25 milliamper grid meter is used in tuning the transmitter. The hinged tickler sets the regeneration exactly enough for the band on which one is working.

must be considerably modified in each case to fit the limits of weight and size which are set by the method of transport. The nature of the power supply must of course also vary.

My set is very nearly always taken along on auto trips among Minnesota's 10,000 lakes. Here we are limited mostly as to space. I accordingly constructed a "transceiver" in, and on, a hard maple case 15½ inches long by 5½ inches wide and deep. This needs an additional 6 inches "head room" to accommodate the tube and in-

to QSY any time you feel like it, and the set is also readily available as an emergency transmitter.

Another problem will always rear its ugly head. That is vibration and rough handling with its accompanying breakage of connections, nuts unscrewed and, possibly, the complete destruction of your brain-child. My solution is to use only the minimum number of parts and make all connections of fairly heavy strip copper as far as possible and to attach these rigidly to the frame by heavy brass bolts.

I chose to make the set a "transceiver" with a 4-pole double-throw cam switch to change over and decided on the Colpitts series feed circuit for the transmitter because it adapted itself so readily to my scheme of connections.

The receiving circuit is the old reliable "2 circuit" autodyne. Since one does not need radio frequency chokes in my particular version of the circuit and regeneration is not a critical adjustment—I find this to fit in nicely with my purpose to use the minimum of parts and space.

The tubes used are 201-A, VT-14 and UV-202. The filament supply is easily obtained from the electrical system of the car. All of these tubes work well in the set with the preference for the 201-A as it gives a greater output with least filament current. Unfortunately it does not last as long as the tubes with tungsten filaments.

As you will see in the photos, the condensers and switch are enclosed. This is to protect them from dust. Dust accumulation is the greatest annoyance I had to contend with until I tore out enough plates to give a clearance of at least 3/16 inches be-

*Member "X" Section, 9AIR, Route No. 2, Sleepy Eye, Minnesota.




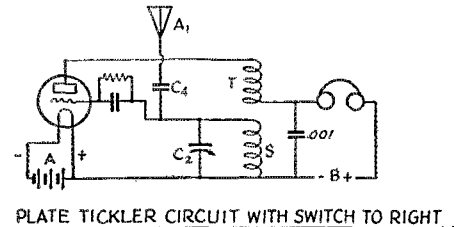


FIG. 1. COMPLETE DIAGRAM

- Lp-Lg Split transmitting inductance (plugin)
- La Antenna coupling coil
- S Receiving tuner coil (plugin)
- T Receiving tuner tickler (hinged)
- C1 C1 Double Cardwell variable condenser
- C2 C2 Federal variable condenser
- C3 C3 Antenna tuning condenser (not built into set shown by photos.)
- C4 C4 Adjustable antenna coupling condenser for receiver.
- The fixed condensers have their capacities marked.
- V Filament voltmeter. (Present set omits this and rheostat)
- Ma Ma Grid milliammeter
- G G Hand driven generator
- A.L. A supply line equipped with plug to fit socket connected with car battery.
- A1 A1 Receiving antenna.
- A2 A2 Transmitting antenna. The same antenna may be used for both purposes by adding another switchblade, provided it is so done as not to upset things.

tween rotor and stator plates. Naturally this gives one a very restricted tuning range; in fact, it just covers our bands, but what more *does* one want? The receiving tuning condenser consists of 4 plates—2 rotor and 2 stator, while the trans. condenser has 3 plates *per* section, 2 stator and 1 rotor. A Cardwell dual condenser is used here. The internal capacity of tubes differs

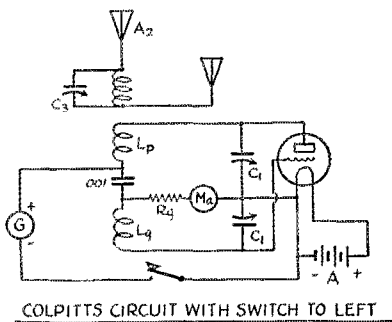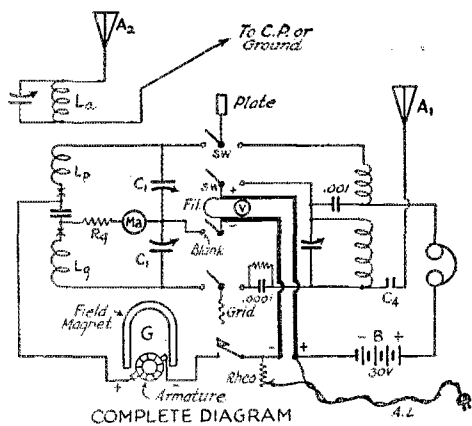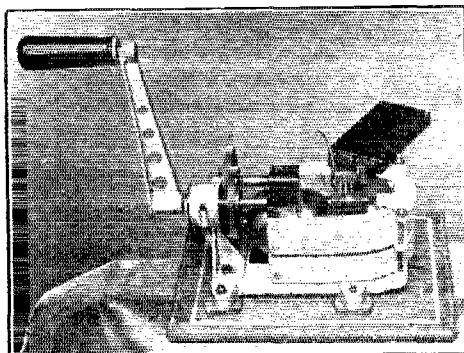

THE "POWER PLANT" REMOVED FROM ITS CASE AND WITH THE SMOOTHING CONDENSER DISCONNECTED TO PERMIT SHOWING THE BRUSHING AND ARMATURE.

The generator is a 1500 volt magneto affair but the more common American "Meggers" use 500 or 1000 volt generators which are quite as useful.

enough to be of importance when they are used in parallel with tuning condensers of such small capacity as these. The 201-A and 202 are very nearly identical but the VT14 tube has a capacity lower than these. When using a VT14 with inductances designed for 202 the resulting frequency was always higher than our legal assignment and contributed not a little to my vexation—before I located the reason.¹

The right values of inductance were found only after a period of cut and try. It took an awful bunch of wire before I had everything right for 80-, 40- and 20-meter operation. I then took the measurements of these coils and substituted Hammerlund space wound rigid coils.

The power supply for the transmitter is the generator of a Marconi "Megger" that I was fortunate enough to buy once. It delivers 1500 volts and 120 mils—180 watts with a strenuous manipulation of the crank. To generate 30 watts, or what we generally put into the portable, is not such a task. This baby generator has a d.c. output and

(Concluded on Page 68)

1. The use of a larger tuning capacity will tend to decrease the tuning effect of different tubes and also to avoid the 20-meter "yooping" which is mentioned later. The ideal from both standpoints is to approach such C/L proportions as are discussed elsewhere in the last issue by Beverly Dudley while at the same time maintaining the condenser spacings which have been found necessary.—Tech. Ed.




BELGIUM

"During the last few months of 1927 many Belgium amateurs have been in regular contact with the Norwegian ships, *Tennessee* (AWL) and *Thallatta* (AWV). Communication has been on 32 meters. The *Thallatta* is on her way to Japan.

"The general conditions for wave propagation are very bad for transmission in a westerly direction, putting us at a disadvantage in working U.S.A. stations. It is much better and sometimes quite good for easterly work, the Aussies coming in strongly each day at about 1830 G.C.T. 4AU who is excellently situated in plain country and has ample power, reports that OZ, OA and AI stations are heard regularly from 0700 to 2100 and he keeps constant contact with them all day long, passing from the 20- to the 32-meter band when that becomes necessary.

"We recently heard xoa5AM when she was being towed from the Virgin Islands to Europe, announcing that she had been dismantled by an awful storm which disabled

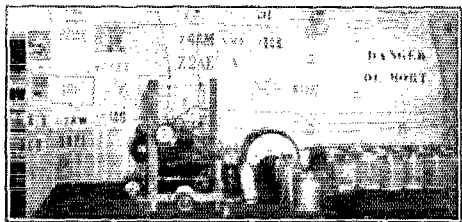

eb4WW IS LOCATED AT 17 BOULEVARD FRERE, URBAN, LIEGE, AND IS OWNED AND OPERATED BY G. REGNIER

The transmitter employs two French type E6 tubes in a Mesny symmetrical tuned grid, tuned plate arrangement. The input to the plates is 150 watts obtained from a 2000 volt transformer and a bridge type chemical rectifier. A Zeppelin antenna operated at a harmonic is the radiator. eb4WW has worked 54 countries and is a member of the WAC Club.

her to an extent where she could not proceed of own accord. (See page 52 of January, 1928 issue, for complete details of her trip to the Virgin Islands.—Assist. Tech. Editor.) Her "boy at the key" wanted to be reported to his friend oa5AG. eb4FT

who was listening at the time, took a chance of getting the information across by calling Australia. Imagine his astonishment when he heard the proper man, oa5AG, replying to his call! The contact was a good one and the entire news passed over to its destination in short order. Very nice work!

"4WW has recently been reported as being heard by aj4ZZ, thus being the first Belgium to be heard in Japan. 4UU worked xep1AM when the *Adamastor* was at Shanghai. The *Adamastor*, a Portuguese warship, is using a Marconi 200-watt valve transmitter employing a single MT-4 tube.

"The Reseau Belge is growing fast and sends to its many friends in the I.A.R.U. its best wishes for a successful radio year during 1928."

—Paul de Neck, President, Reseau Belge.

CHILE

The following report on conditions in Chile has been supplied to us by sc2AS, being relayed thru nu6AM.

"Hot weather and QRN make receiving conditions rather bad in Chile at present, although in spite of this, NU stations still pound through in fine style on the 40-meter band. Few NU and no European signals have been heard on the 20-meter band for about a month now.

"We understand that sc3AG has taken his station to bits with the intention of going to Argentina and settling there. We would surely feel it very much if we lost him, since he is one of our best amateurs. Anyhow, if he does go, we can be certain of having a good friend among the SAs.

"Most of our stations are in a calm now on account of the summer heat and QRN but all will be going strongly during the coming February International Tests.

"Two of our stations, 2AS and 2AH have received titles of 'Member of Honor of the EAR Association,' the Spanish I.A.R.U. Section, for having worked Spain during a contest organized by that organization, sc2AS was the first Chilean to work Spain."

—sc2AS.

ENGLAND

"Conditions have been very strange towards the end of December and even the

(Continued on Page 72)

Correspondence

The Publishers of QST assume no responsibility for statements made herein by correspondents.



72 Gardner Street,
Allston, Mass.

Editor, QST:

Since last sending you information regarding amateur activities during the recent New England flood, reports have come in from straggling stations, some of which were located in the flooded area, most important of which is that of 1BDX and I am enclosing herewith a copy of a letter which accompanied his report. This letter was read before the Boston Post of the American Signal Association on their last monthly meeting.

About fifty members of the Post were present and 1BDX was recommended for honorary membership in the Boston Signal Post and the Post further agreed to rehabilitate his 50-watt transmitter.

—D. S. Boyden, 1st Lieut.,
Signal Corp Reserve

P. O. Box 209
Barre, Vermont.

1st. Lieutenant D. S. Boyden, Sig Res.

Dear Sir:

"Following is the requested report on activities at 1BDX during the flood emergency.

"On the first day of the flood at about 3.00 p.m., the excitement began when I had a narrow escape from a store basement as a wall collapsed filling up the basement with water in a few seconds and killing the two men I was working with. I had another close call later in the evening. While working in about a foot of water on the first floor, a trap door cover floated off leaving quite an opening in the floor. I fell thru this opening down into the basement, but luckily came back up thru the same hole and climbed out.

"I was ordered home at about 1.00 a.m. and told to change clothing, eat, etc. When I had done this, I began a series of QSTs giving information on the flood. I don't know just how this dope got thru as I have had no reports on it.

"No QSOs were made until later that morning. When I first offered my services, the people must have thought it was the "Bologna" or something. However, when I began returning prompt answers to personal messages, everyone made a rush to get their dope through.

"Then I didn't get a chance to eat, sleep or anything else. The first relief I got was when Birnie of 1AVZ (not operating) and Hunt, a former operator from Lancaster, New Hampshire, came up to the shack. I don't know what day that was. It was hard to try to keep track of everything. I got something to eat and slept that night, anyway.

"Almost all operation was on forty meters with one UV-203-A. After a few days of steady operation, two 'S' tubes went out due to continuous use and old age with a highly fluctuating line voltage at the time. It was then that the City of Barre sent a message to the Army Base in Boston asking to have the necessary tubes sent up by the next plane. That was the last heard about them. About November 10, the other 'S' tubes went out taking the 203-A and half of the secondary of the plate supply transformer with it. That put the transmitter off the air altogether. It still is.

"About a week later, storm warnings came out, the water began to rise again and the city officials got real nervous. They wanted to know if I could handle emergency messages for them in case of another flood. I would hate to repeat what I told them! But I started on a 201-A transmitter with 'B' batteries and got QSO other stations but the water did not come very high and the lines were not out so did not have to use it.

"My own car was ruined in the flood but we borrowed two others and managed to beg, borrow or steal enough gasoline to keep them going. They were on the run most all of the time delivering messages locally, there being no local phone service.

"I have no idea of the number of messages handled. I have part of those originated and relayed but we did not have time to make copies of those delivered. I wrote them out on any kind of paper handy and gave them to the two fellows driving the cars to deliver and that's the last I would see of them.

"There were approximately 2500 words of press and 396 messages originated and relayed. None of the press was sent on my account, all messages were signed by city officials or press reporters. The traffic total would probably run close to 600 or 700 messages if we had had time to copy them

100,000 MERSHON CONDENSERS

WERE shipped from our plant in the last season. Just ONE was returned on account of electrical defects. One—out of a hundred thousand!

Made in a leak proof copper receptacle, rugged, strongly built, very simple to handle and adjust to any circuit—the Amrad Mershon Condenser is virtually indispensable in the field of modern radio.

MERSHON CONDENSERS are found particularly well suited to power supply devices employing the 210 tube. THEY COST LESS than a paper-condenser block designed for 210 operation and are MUCH MORE EFFICIENT!

Self-healing in case of puncture due to high voltage, large capacity in a small space and an average life of 30 years under normal operating conditions are factors that you cannot afford to overlook.

New
Low
Prices



Let us send you a new and constructive booklet, just off the Press, on the Amrad Mershon Condenser, showing hook-ups and giving a wealth of information. Address Department 28. We will also send a special Engineering Bulletin, if you desire it.


THE AMRAD
CORPORATION
Medford Hillside,
Mass.

MERSHON CONDENSER

Makers of the
Amrad Mershon
Condenser

Finer Reception

with these complete
AmerTran Units!

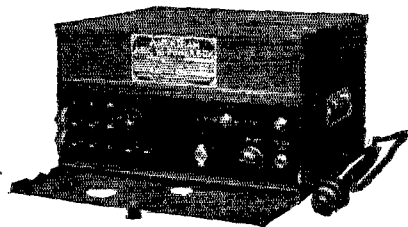


The AmerTran ABC Hi-Power Box. List Price \$102.50 east of the Rockies, complete with rectifying tube.

These are instruments that will appeal to the engineer or experimenter as the highest standards for comparative purposes. Quality reproduction—limited only by the perfection of the speaker—noiseless reliable power without the nuisance of batteries or chargers—are available with these companion units.

The A B C Hi-Power Box delivers uniform, dependable power from the house-current—supplying sufficient voltage and current for Push-Pull 210 tubes and all other A C tubes required in a modern receiver. The complete unit contains AmerTran designed equipment with a power transformer having windings to provide current for all tubes.

With AC power supply or batteries, the tone fidelity brought by the AmerTran Push-Pull Power Amplifier is actually limited only by the perfection of the speaker. The energy output is increased especially at the lower musical frequencies bringing greater clarity at high or low volume. Furnished with cable and plug the amplifier connects directly with the ABC Hi-Power Box.

See these new AmerTran products on demonstration at any store displaying the sign "Authorized AmerTran Dealer" or, write direct to this Company. Both wired units are licensed under patents owned or controlled by R C A and must be sold complete with tubes.

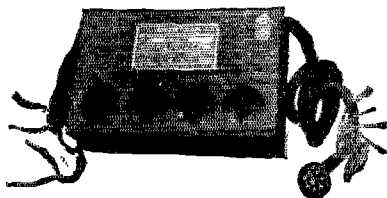

The AmerTran Push-Pull Power Amplifier. List price \$60, east of the Rockies. Price of Amplifier complete with tubes depends on tubes specified.

American Transformer Co.

174 Emmet St., Newark, N. J.

"Transformer Builders for Over 27 Years"

for the files. The 396 messages and press first mentioned would be found here on file any time needed.

"There was quite a variety of traffic. The majority was purely personal stuff but at the same time we ordered materials for the various city departments, ordered tank trucks and gasoline, gave dope on the roads to route trucks over, gave names and locations of communities where food and medical supplies were most needed, handled official messages for the governor, gave all the data on the flying fields in the vicinity, asked for and delivered instructions for show troupes, salesmen, etc.

"By the way, the dope on the airports was sent by the City of Barre to the Boston Army Base to be forwarded to all fields sending planes here. I met most of the pilots personally later and they said that they had received none of this information. That was rather too bad, seeing that a plane smashed in Montpelier, the passenger being killed and the pilot seriously injured.

"Have been pretty sick with the grippe lately so haven't had a chance to report sooner. The doctor says I will have to have my appendix out before long so don't know when I will be back on the air again. Hope this report gives you all the dope you wanted, OM.

G. E. Cruickshank, 1BDX."

Changing Wavelength

Gatun, Panama, C. Z.

Editor, QST:

I've been wanting to write for a long time concerning the reception of signals down here, and since reading an article about the unsteadiness of waves from broadcasting stations and that they were not keeping on their assigned frequencies, I have this to say.

I've been observing the signals from two stations in the twenty-meter band for quite some time. These stations, 2XAD of Schenectady and HJG of Bogota, Colombia, at 6.30 p.m. are right on top of each other but as evening draws along they become separated to the extent that HJG does not interfere with 2XAD. Some nights they are as much as 30 kilocycles apart at 9.00 p.m.


As I understand it, both stations are inland so that the rise and fall of the tide, presumably, could have nothing to do with it. I have tried to figure the meaning of this but am no closer to the answer than when I first noticed it. These stations, I believe, are both crystal controlled, so it doesn't seem possible that their waves are creeping.

I would like to have someone enlighten me on the subject as it has an effect on some work I am doing.

—Henry P. Karr.

ALUMINUM

The mark of Quality in Radio

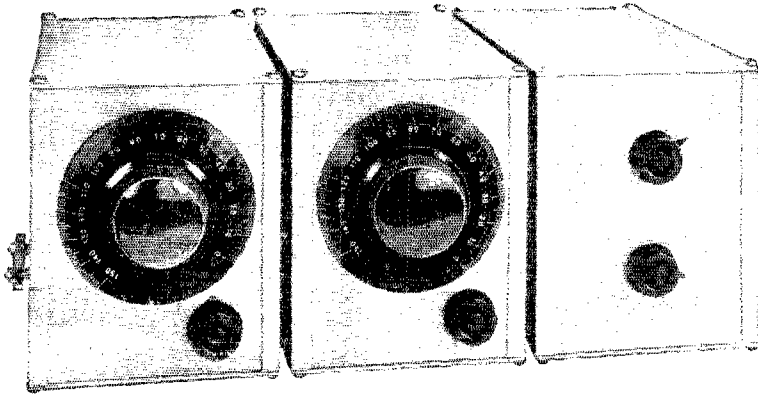

The Q. S. T. (December) Short Wave Set
*Improved reception is obtained in this excellent hook-up by the use
of three standard Aluminum Box Shields*

Now You Can Get Greater Distance — Better Selectivity

BOTH advanced amateur set builders and professional designers recognize the advantages that result from Aluminum Shielding.

Aluminum Shielding gives *greater distance, better selectivity—closer tuning*. Its use eliminates or greatly reduces interference. It is ideal for shielding circuits using the new shielded grid tubes.

Aluminum Company of America's standard box shields, designed especially for amateur sets, are made of heavy Alcoa Aluminum with satin-dip finish, size 5 in. x 9 in. x 6 in. high. They are

easily adapted to smaller sizes. They require no soldering.

The Q. S. T. Short Wave Set (described in the December issue of this magazine) employs three standard Aluminum Box Shields.

If your dealer cannot supply you with standard Aluminum Box Shields send us your order and we will have an authorized dealer ship promptly at \$3.50 each. You simply pay the postman.

Write for free copy of the book, "Aluminum for Radio." It contains many helpful hints for amateurs.

ALUMINUM COMPANY OF AMERICA

2460 Oliver Building

Pittsburgh, Pa.




CONTROL! CONTROL! CONTROL!

YOU fellows who work on short-wave transmission and reception know the value of precise control. No use telling you the value of micrometric resistance—adjusted to a hair, noiseless, reliable, stable, fool-proof—as found in the Clarostat.

If you want micrometric resistance control for the receiver, particularly razor-sharp regeneration, use the Volume Control Clarostat (practically zero to 500,000 ohm range, with 7-watt rating.)



If you want line-voltage compensation, use the Low Range 25-500 Power Clarostat. Other Power Clarostat ranges, $\frac{1}{4}$ to 10 ohms; 200 to 100,000 ohms; with 40-watt capacity.



If you want a variable grid leak for the transmitter, use the Universal Clarostat, or, for the smaller job, the Standard Clarostat (practically zero-5,000,000 ohm range, with 20-watt capacity.)

If you want power unit voltage control, use the Power Clarostat or the Standard Clarostat.

Write us for dope regarding Clarostats and how to use them. And when you buy Clarostats, be sure you get the genuine job in familiar green box and plainly stamped Clarostat on metal shell. Don't be fooled, O. M.

American Mechanical Laboratories, Inc.

Specialists in Variable Resistors

285 North 6th St. Brooklyn, N. Y.



An Interesting Letter

Oakmont, Pa.

Editor, *QST*:

Enclosed is a letter from a high school boy. It appears that it pays to help the youngsters, doesn't it? This fellow is a fine operator now and handles stuff like a commercial operator. He surely has made remarkable progress.

—A. W. McAuly, SCEO.

411 Palmwood Ave.
Delta, Ohio.

Mr. A. W. McAuly, SCEO
309 Third Street
Oakmont, Pa.


Dear OM,

Turn your mind back to a day along in January of this year and you will doubtless remember receiving a card from a fellow operating a station 8BNW, requesting a schedule with you. At that time I had been actually operating about four months and I was, to say the least, rather green. I picked your station because of the fine note, loud signals and especially on account of the fine steady operating and consistency of the station. I soon found that my faith was justified and no one was more pleased than I when you accepted my schedule.

Under your care and guidance, and with the comradeship which we have gained, I flatter myself that I have become more than just a lid operator. I hold a commercial license, am an ORS and have made a fair showing in traffic, and to you, OM, I owe a great part of my success. You were my first schedule and I have tried to live up to it, and I believe that we have been as nearly consistent as was humanly possible, under the circumstances, and right now I want to take this opportunity of thanking you for your help and consistency and to compliment you on the fine spirit of cooperation which you have shown in every way. Words cannot adequately express my kindly feelings toward you.

I have beside me a small yellow card stating that the credits of one F. C. Everett are satisfactory and that he will be permitted to register at the University of Michigan. I also have a letter stating that it will be necessary for all freshmen to be at Ann Arbor shortly. Need any more be said? I fear that our schedule will soon end and that I will light out for the tall buildings where men are students and girls are co-eds. I expect to take a receiver with me but no transmitter, for too much radio will bring too little study. I certainly have enjoyed our association and hope that we may continue to be the best of friends, with the hope of meeting you personally some day.

Our schedule will continue as usual until the time that I will leave. This will give you plenty of opportunity to obtain some station to take my place, possibly you and 9APY could make direct contact now that fall and winter is approaching. This is

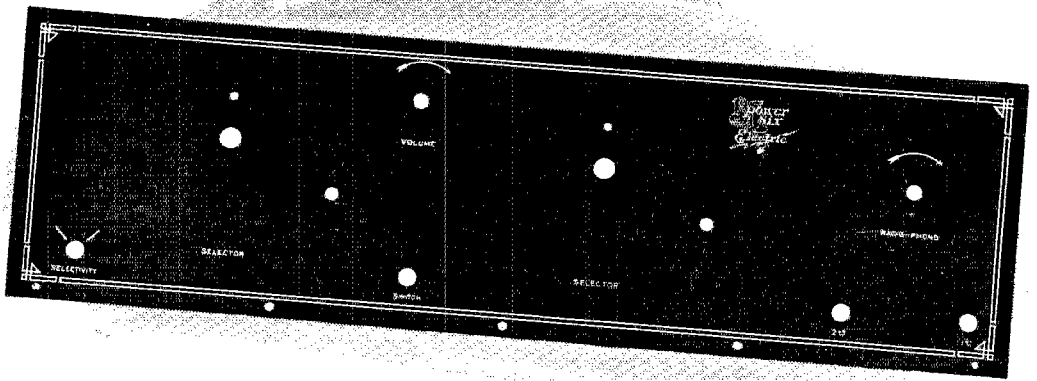

Four New Kit Panels!

Bremer Tully Power Six Electric; Karas A-C Equamatic; Karas Knickerbocker Four and Tyrman "70" front and sub panels are recent additions to the Formica line. There are also available panels for battery sets of the same makes and the World's Record Ten; H. F. L. Nine-In-Line; Magnaformer front and sub panels; Madison-Moore; Melo-Heald; Camfield Nine and many others. :: ::

Special panels cut to any size and tubing, rods, etc. is also available for amateur use.

The Formica Insulation Company
 4618 Spring Grove Avenue Cincinnati, Ohio

Any jobber or dealer can get Formica panels for you.

FORMICA

Formica has a Complete Insulating Service for Manufacturers.



ACME Flexible Celatsite Wire

A cable of fine, tinned copper wires with non-inflammable Celatsite insulation. Ideal for sub-panel or point-to-point wiring. Strips easily, solders readily. Nine beautiful colors; sold only in 25 ft. coils, in cartons colored to match contents.

Acme Celatsite Wire

Tinned copper bus bar hook-up wire with non-inflammable Celatsite insulation, in 9 beautiful colors. Strips easily, solders readily, won't crack at bends. Sizes 14, 16, 18, 19; 30' lengths.



Spaghetti Tubing

Oil, moisture, acid proof; highly dielectric—used by leading engineers. Nine colors, for wire sizes 12 to 18; 30' lengths. (We also make tinned bus bar, round and square, in 2 and 2½ ft. lengths.)

Stranded Enamelled Antenna

Best outdoor antenna you can buy. 7 strands of enamelled copper wire. Presents maximum surface for reception, resists corrosion; this greatly improves the signal. Outside diameters equal to sizes 14 and 16.

(We also offer solid and stranded bare, and stranded tinned antenna.)

Loop Antenna Wire

60 strands of No. 38 bare copper wire for flexibility, 5 strands of No. 36 Phosphor bronze to prevent stretching. Green or brown silk covering; best loop wire possible to make.

Battery Cable

A rayon-covered cable of 5, 6, 7, 8 or 9 vari-colored Flexible Celatsite wires for connecting batteries or eliminator to set. Plainly tabbed; easy to connect. Gives set an orderly appearance.



Send for folder

THE ACME WIRE CO., Dept. S
New Haven, Conn.

just a suggestion of course, as it is not my intention to intrude upon your ideas. I will let you know the date of my departure as soon as possible.

I hope to meet some amateurs in Ann Arbor and possibly to be second operator at one or more of their stations. Since I am only sixty miles away perhaps I will be able to operate 8BNW once in a while. If you ever hear an Ann Arbor station signing "FE" for a personal sign or if you hear 8BNW, give me a call if just for old time's sake. OM.

The latchstring is always out to you and your family and if you can ever possibly come this way please drop in and see me. If I get a chance to come to Pittsburgh, I probably will take the liberty of coming to Oakmont and looking you up. If at any time I can be of any assistance to you, do not hesitate to call on me and I will be delighted to accommodate you.

With best wishes and the hope that this will be merely farewell and not goodbye. Drop me a line and let me know how you're getting along, and I'll be glad to hear from you even if I'm too busy to answer. Very very 73, OM.

Sincerely,
—Frederick C. Everett, 8BNW.

Can't Afford QST

Canton, Mass.

Editor, QST:

I have your follow-up letter to me as a former subscriber. It is not my custom to consider any such communications as anything but fuel, but this one in point is so unusually well done that I do not treat it in the usual way. Instead, I will explain.

QST gave me data which I found to be of great assistance to me in some rather unscientific experimenting I did during a year of disability due to sickness. For this reason I shall always feel grateful to it and to you. Conditions have now quite changed and I can no longer afford to have QST about, tempting me to spend much needed time and energy as you know I should be tempted to spend it. So please don't send any copies.

—James McKen Lewis


QSL and Keying

Red Lodge, Montana.

Editor, QST:

Say Gang, what is the matter with our QSL business? If we don't send more cards than we have in the past we will cause some of the printers to go out of business! We are falling down on the job when it comes to QSLing. I'll admit that I do not send a card first to every station worked and here's the reason why I don't. Last winter, I QSLed to every station worked and in nine times out of ten, I sent my card first. One day I sent thirty-four all at one shot. Well I didn't get thirty-

ACME WIRE
MAKES BETTER RADIO

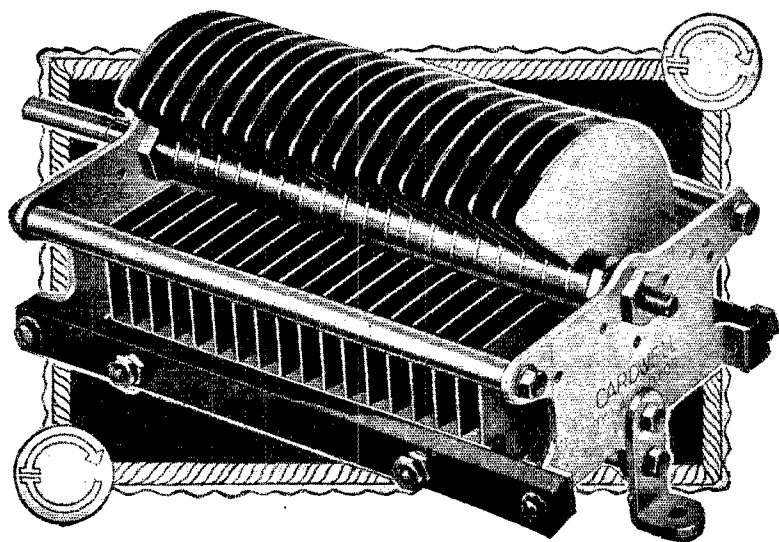

“WE faithfully promise you that, all other conditions being equal, you will work more DX with Cardwell Condensers”



YEARS of experience have taught us how to make the best of condensers and specialized production methods keep the prices right. To pay more than a Cardwell price is to waste money.


Amateur sizes, seven and ten dollars. A postal will bring full details.

The Allen D. Cardwell Mfg. Corp.

81 PROSPECT ST.

BROOKLYN, N. Y.

“THE STANDARD OF COMPARISON”

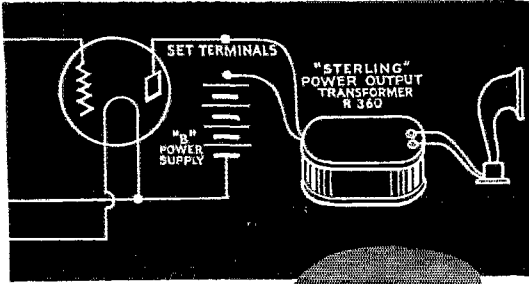

four in return for those I sent. No, I'll admit I didn't. I received only four cards in return.

I didn't think of it so much at the time but after I began keeping close tab on the affair, I decided never to QSL first again, unless someone asked me to first and then they would send theirs after. Well, I tried this and still they would not send cards so I decided to try another one. Now, I do not QSL first under any condition, but the fellow who QSLs to me will certainly get one of my cards in return for his.

Of course, if all the gang were to try this same idea, we might just as well throw our cards away because there would never be any exchanging. But what I do want to see more of is that if a fellow asks you to QSL first by all means do so and to the fellow who asks the other chap to QSL first, be sure to send him one of *your* cards in return. If you do not want to send one of your cards, for Heavens sake, don't ask anyone to send you one of theirs! So much for that and now a few words about keying.

I have always been fond of a good steady note that seems to float in, that is, minus all sputters, gurgles and thuds usually caused by keying. My transmitters had steady waves but their notes were not the best on the air. I tried various ideas to kill those thuds but very few helped even a little bit.

The following diagram shows the arrangement I last rigged up, which to my surprise was the thing I had tried so long to get. My transmitter then sounded much like a MO-PA set and the signals started and stopped without the slightest sputter, gurgle or thud. This arrangement has proven very satisfactory here.

With it, a steady back wave will be emitted right on the main wave but much weaker than the main wave. It will not cause any QRM for the receiving operator. With the grid leak as shown, there is a small current passing all the time. In this case, there is not immediate starting and stopping of the signals or oscillations of the set when keyed and the effect will be "feathery". Your signals will "float" in now.

—O. W. Viers, 7AAT-7QT.

Don't burn out your Loudspeaker!



make it more responsive to weak signals — IMPROVE TONE QUALITY — eliminate tube noises.

THE STERLING POWER OUTPUT TRANSFORMER connected between the radio set and the loud speaker absolutely prevents the high voltages now delivered by "B" Power Units from ruining the speaker and large "B" Batteries make it necessary to protect the loudspeaker from damage.

This transformer is more than a protective device—it permits closer adjustment of speaker diaphragm increasing its sensibility to weak signals—prevents shocks when using headphones—eliminates tube noises and IMPROVES TONE QUALITY OF THE SPEAKER. Attach in two minutes, leave permanently connected. Price \$5.00.

Sterling

POWER OUTPUT TRANSFORMER

STERLING "B" POWER VOLTMETER



A high resistance voltmeter specially designed for accurate testing of high voltage outputs of "B" Power Units, heavy duty "B" batteries and all D. C. Circuits up to 300 volts. Indispensable for every amateur—a low priced, accurate meter.

R-415
\$8.50

THE STERLING MFG. COMPANY

2831 Prospect Ave.,

Cleveland, Ohio

Strays

Jim Lamb, nu3CEI, ex-nu9CEI, who has been on an extended visit to Hq. tells us that wood for transmitting frames and for spreaders on two-wire feed lines may be obtained in most job printing plants and printer's supply houses. Strips of straight-grained cherry that have been seasoned, impregnated with vegetable oil and pressed may be obtained in various widths of from ¼ to 1½ inches. All are ¾ inches thick. They are called printers "furniture", come in three foot lengths costing from eight cents per length, up.

Cunningham RADIO TUBES

Confidence in a Name

Thirteen years of concentrated effort on a single product has brought such uniform perfection that confidence in these tubes and the name they bear is almost universal among radio enthusiasts.

E. T. Cunningham, Inc.
New York
Chicago San Francisco



How to be a commercial Radio Operator

A practical book that should enable anyone of average intelligence to pass the Government's theoretical examination given to applicants for a Commercial Radio Operator's License.

JUST OUT Nilson and Hornung's PRACTICAL RADIO TELEGRAPHY


380 pages, 5x8, 223 illustrations
\$3.00 net, postpaid

The book covers in detail the theory and practical operation of every type of modern, 1928, commercial arc, spark, and vacuum tube transmitter. It furnishes complete data on commercial vacuum tube receivers. It covers everything from elementary electricity to the practical operation of radio compasses.

Some outstanding points

1. Very little mathematics;
2. Assumes no prior knowledge of electricity;
3. Covers everything in commercial radio in detail;
4. Complete list of self-examination questions;
5. Simple, yet rigidly accurate;
6. Complete wiring diagrams given.

See the book before you purchase. Fill in and mail just this coupon.

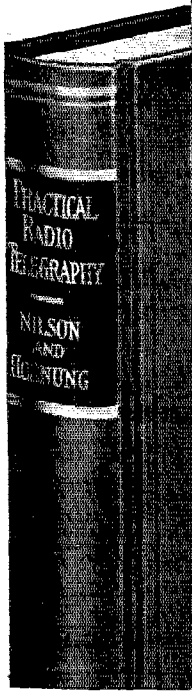

The Design of Variable Condensers for High-Voltage Operation

(Continued from Page 51)

condenser is supposedly not a conductor, but it must always be remembered there are always a few free electrons in any class of material, and that there is no such thing as a perfect insulator. We naturally select the best possible insulator, but it remains quite important to keep its mass and its contact with the high potential electrode of the condenser at a minimum.

Another important requirement for the insulation is that it be totally non-hydroscopic—that is, that neither its surface nor its interiors shall be in any way porous or subject to the collection of moisture. The surface should be very hard and smooth so that the least possible amount of dust will collect, because even dry dust will allow a large amount of leakage, and if it becomes at all moist the creeping of the electric current along the surface will cause a serious loss in efficiency. Protracted continuance of this creeping will eventually roughen the surface of the insulation, due to its heating action, after which it will be even more conductive than before, even when dry.

As we increase the voltage across the terminals of the condenser we must increase the thickness of the plates, not because of our need for a greater area of conducting material but because we have greater pressure at whatever corners remain and the radii of the curves composing these corners must be correspondingly increased in order to keep the density of charge sufficiently low. This will eventually result in a construction similar to Figure 2, and if we go even further we will find ourselves with a row of opposed spheres as in Fig. 3. This

McGraw-Hill FREE EXAMINATION COUPON

McGraw-Hill Book Co., Inc.,
370 Seventh Avenue,
New York, N. Y.

You may send me Nilson and Hornung's PRACTICAL RADIO TELEGRAPHY, \$3.00 net, postpaid. I will either return the book, postage prepaid, in 10 days, or remit for it at that time.

Name

St. & No.

City

State

Name of Employer

Official Position

(Books sent on approval in the U.S. and Canada only)
QST. 2-1-28

DODGE RADIO SHORTKUT

With Appendix and Hints for Better Key Work. Fixes Signals in mind to stick—Kills Hesitation. Cultivates Speed and Good Fist—Produces Results. Slow Hams raise speed to 25 per in few evenings. Previous Failures qualify and pass exam quickly. Beginners master code and pass in ten days.

DODGE HIGH SPEED METHOD

(Intensive Speed Practice)
Quickly puts 25 per Hams in 35-40 per class. Five Hams report made this gain in few evenings. One of them by 75 minutes total practice only.

DODGE MORSE SHORTKUT

Easily mastered by Radio Ops—Kills tendency to mimic or confusion. Either code used as desired.

REPORTS FROM USERS

Tell the complete story—Mailed on request. Radio \$2.50. High Speed \$2.50. Morse \$2.50. Money order. None C. O. D. Foreign add 50 cents.

C. K. DODGE, MAMARONECK, NEW YORK.

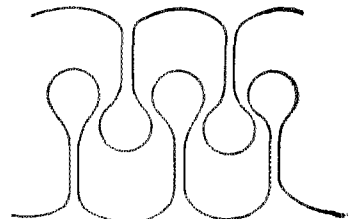


FIGURE 3


last construction, of course, is impracticable, because the capacity for any given amount of metal becomes extremely small, but it is interesting as an example of the construction that might be required if our voltage were to run, for example, over a hundred thousand. Such potentials in so-called air dielectric variable condensers are as yet not encountered, but when at any time condensers for such purposes become necessary, engineers will undoubtedly find a method of producing them more economically than at present.

Your Sigs QSA

with

THORDARSON

TRANSMITTING EQUIPMENT




FILAMENT SUPPLY TRANSFORMERS

[Completely
Shielded]

- T-2180—Secondary: 5 volts, center-tapped. Capacity: 15 V.A. Dimensions: $3\frac{3}{8}'' \times 2\frac{1}{4}'' \times 3\frac{3}{4}''$ high. Weight, 2½ lbs. Price \$5.00
- T-2230—Secondary: 7.5 volts, center-tapped. Capacity: 35 V.A. Dimensions: $3\frac{1}{2}'' \times 3'' \times 3\frac{3}{8}''$ high. Weight, 3½ lbs. Price \$7.50
- T-2382—Secondary: 12 volts, center-tapped. Capacity: 80 V.A. Dimensions: $3\frac{1}{2}'' \times 4\frac{1}{2}'' \times 4''$ high. Weight, 5 lbs. Price \$10.00
- T-2383—Secondary: 12 volts, center-tapped. Capacity: 175 V.A. Dimensions: $4\frac{1}{2}'' \times 5'' \times 6''$ high. Weight, 12 lbs. Price \$15.00
- T-2370—Secondary: 1.25 volts, no center tap. Capacity: 20 V.A. Dimensions: $3\frac{3}{8}'' \times 2\frac{1}{2}'' \times 3\frac{3}{4}''$ high. Weight, 2¼ lbs. Price \$5.00
- T-2504—Secondary: 3 volts, center-tapped. Capacity: 35 V.A. Dimensions: $3\frac{1}{2}'' \times 3'' \times 3\frac{3}{8}''$ high. Weight, 3½ lbs. Price \$7.50
- T-2445—Secondary No. 1: 1.5 volts, no center tap, 12 V.A. Secondary No. 2: 2.65 volts, center-tapped, 10 V.A. Secondary No. 3: 5 volts, center-tapped, 5 V.A. Dimensions: $2\frac{3}{4}'' \times 5\frac{3}{8}'' \times 4\frac{3}{8}''$ high. Weight, 5½ lbs. Price \$10.00

PLATE SUPPLY TRANSFORMERS

[Steel Case, Crackle
Finished, Compound
Filled]




- T-2385—Secondary: 550 V. and 750 V. each side of center tap. Capacity: 100 V.A. Dimensions: $5'' \times 5\frac{1}{4}'' \times 6''$ high. Weight, 8½ lbs. Price \$16.00
- T-2387—Secondary: 1000 V. and 1500 V. each side of center tap. Capacity: 300 V.A. Dimensions: $7\frac{1}{2}'' \times 5\frac{3}{8}'' \times 7\frac{1}{2}''$ high. Weight, 20 lbs. Price \$22.00
- T-2388—Secondary: 1500 V. and 2000 V. each side of center tap. Capacity: 500 V.A. Dimensions: $7\frac{1}{2}'' \times 6\frac{1}{8}'' \times 8\frac{1}{2}''$ high. Weight, 27 lbs. Price \$30.00
- T-2389—Secondary: 1500 V. and 2000 V. each side of center tap. Capacity: 1000 V.A. Dimensions: $7\frac{1}{2}'' \times 7'' \times 9\frac{1}{2}''$ high. Weight, 40 lbs. Price \$40.00

FILTER AND PLATE REACTORS

R-196—30 Henry, 80 M. A. 1000 V. insulation, shielded. Dimensions: $2\frac{1}{2}'' \times 2\frac{1}{2}'' \times 3''$ high. Weight, 2 lbs. Price \$5.00

T-2353—6 Henry, 150 M. A. 3000 V. insulation, open frame. Dimensions: $3'' \times 3\frac{1}{4}'' \times 3\frac{3}{8}''$ high. Weight, 3 lbs. Price \$7.50

T-2071—30 Henry, 150 M. A. 3000 V. insulation, open frame. Dimensions: $2\frac{3}{4}'' \times 3\frac{1}{2}'' \times 6''$ high. Weight, 5 lbs. Price \$16.00



T-2027—30 Henry, 300 M. A. 3000 V. insulation, open frame. Dimensions: $5'' \times 3\frac{1}{2}'' \times 8''$ high. Weight, 14 lbs. Price \$22.00

T-2073—30 Henry, 500 M. A. 3000 V. insulation, open frame. Dimensions: $4\frac{1}{2}'' \times 5\frac{1}{2}'' \times 9\frac{1}{2}''$ high. Weight, 24 lbs. Price \$30.00

T-2099—Double Filter Reactor, each reactor 30 Henry, 120 M. A. 1000 V. insulation, compound filled steel case. Dimensions: $3\frac{1}{4}'' \times 4\frac{1}{8}'' \times 5\frac{3}{8}''$ high. Weight, 8 lbs. Price \$14.00

THORDARSON ELECTRIC MANUFACTURING CO.

Transformer specialists since 1895


WORLD'S OLDEST AND LARGEST EXCLUSIVE TRANSFORMER MAKERS

Chicago, U.S.A.

THE Great New VIBROPLEX

Reg. Trade Marks: Vibroplex-Bug-Lighting Bug

No. 6

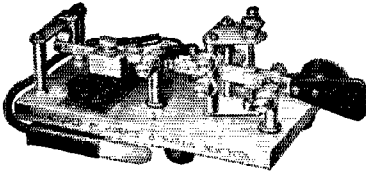


Japanned Base \$17
Nickel-Plated 19

efficient. A great bug! Hundred already sold.

Here's the Bug you want! Up-to-the-minute and rarin' to go. Slow or fast—it sends smoothly, accurately and with amazing ease. *The Great New Features.* New design. More beautiful. More

Famous Improved Vibroplex



Used the world over because of its ease and perfection of sending

Over 100,000 users.

Special *Kadvo* bug equipped with extra large specially constructed contact points to break high current without use of relay

Japanned Base \$17
Nickel-Plated 19

\$25

Remit by Money Order or Registered mail.

THE VIBROPLEX CO. Inc
825 Broadway NEW YORK
Cable Address: "VIBROPLEX" New York

The illustrations show a number of interesting examples of variable condensers built for high powered installations such as are now being used in broadcasting and high powered commercial stations or trans-oceanic telephony. One of the largest variable condensers ever built has a voltage breakdown of over 15,000 r.m.s. and a capacity of 800 picofarads. It is nearly 30" long and weighs over a hundred pounds, although built chiefly of aluminum. Each condenser is usually built for its own special job and no attempt has been made to standardize at the present time on models for breakdowns very much above ten thousand volts r.m.s., although they have been manufactured for r.m.s. voltages above fifty thousand.

Experimenters' Section

(Continued from Page 53)

with a large condenser across the terminals gives an almost pure d.c. note. A second person to work the key (or crank) is a convenience but not necessary. Incidentally, the weight of this power supply is 25 lbs.

The set as shown has done good work at 80 and 40 meters but not at 20 meters. On using a "growler" tone tester I found that variations in speed on the generator "prime mover" caused variations in voltage of such proportions as to cause "yoop yooping" in the wavelength. Using the set in the station but with B batteries on the plate, this was absent and one can do very nicely on 20 meters.

B batteries undoubtedly would be the ideal plate supply on any wave but take up too much room and in my particular case are not as economical as the "Megger" which cost only \$3.50.

Just one thing more. The "flashlight-bulb-in-the-antenna" has been thoroughly *unsatisfactory* and has been replaced by a 0-25 milliammeter in the grid-leak circuit. This indicates resonance very definitely.

BARCLAY CHARTS

We have a few Barclay charts at present. Anyone desirous of one of these handy charts may have one by writing the Experimenters' Section.


—R. S. K.

FROST-RADIO FROST-RADIO FROST-RADIO FROST-RADIO FROST-

FROST-RADIO

WONDERFULLY BETTER FOR EVERY SET

Frost Radio Metal Frame and Bakelite Rheostats are not only the smallest and most compact rheostats made, but they have velvety-smooth action and windings of finest Nichrome or Chromel A wire. Due to number of turns used these rheostats will keep cool under the heaviest load for which they are designed. Complete with Bakelite pointer knob. Resistances from 2 to 75 ohms. List: Metal Frame 75c; Bakelite \$1.00.



Write for Them

WE OFFER readers of Q.S.T. two valuable new Frost-Radio publications free on request. "What Set Shall I Build?" the answer to a question which puzzles many set builders, and the new Frost booklet "For Better Reception," a complete and helpful manual of Frost Parts. Every set builder should have both of these booklets. They will be found chock-full of useful information that is right up to the minute. Fill out and mail coupon below for your copies.

HERBERT H. FROST, Inc.

Main Office and Factory, Elkhart, Indiana
Chicago New York

HERBERT H. FROST, Inc.
160 North La Salle Street, Chicago
Please send me free four two booklets, as advertised in Q.S.T. for March.

Name
Street Address
City State.....


FROST-RADIO FROST-RADIO FROST-RADIO FROST-RADIO FROST-

FLECHTHEIM SUPERIOR CONDENSERS


FLECHTHEIM superior condensers are best for amateur and experimental use. List less 35%. Send for folder.

UNITED STATES RADIO SALES COMPANY
34 FRONT STREET NEW YORK CITY

TRANSMITTING KITS ==

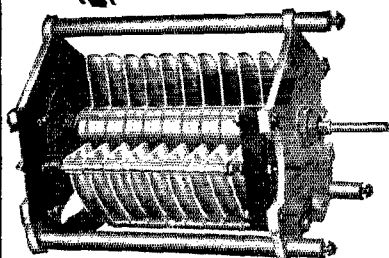

REL transmitting kits are known the world over. Amateurs everywhere are enjoying REL power and efficiency. REL has become the symbol for mechanical perfection wherever Short Wave enthusiasts gather.

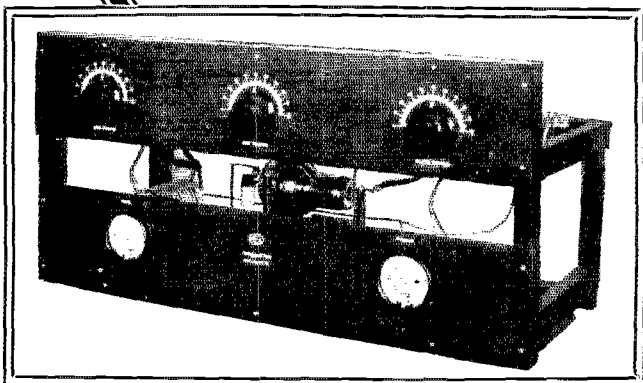

THE Tuned Plate Tuned Grid (pictured) equipped with the new REL Super Condensers as well as the universally known Transmitting Inductances, is one of the best buys in Radio today! This kit has proven to be one of the most popular known.

LOOSE COUPLED HARTLEY

7.5 watt kit\$56.00
65 watt kit 63.00


TUNED PLATE TUNED GRID

7.5 watt kit\$71.00
65 watt kit 80.00

M. O. P. A.

7.5 watt kit\$56.00
65 watt kit 96.00

Prices of larger kits given upon application.

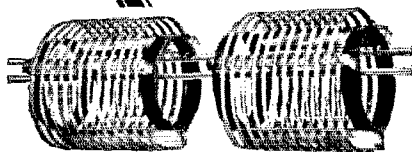

SEND 25c (no stamps) for REL's Short Wave Handbook. It's one of the most comprehensive collections of S. W. data that can be found. It will earn a prominent place next to the "heap". Kept up to date by the timely issuance of data sheets, mailed to you free, of course.

REL owns and operates experimental Station NU2XV on 15.1, 30.2, and 60.4 meters

Radio Engineering Laboratories

(REL) 100 Wilbur Avenue, Long Island City, N. Y. (REL)

(Continued from Page 32)




Licensed under Andrews-Hammond patent

The truest and clearest AC Electric Radio is a standard set equipped with Balkite Electric "AB" \$64.50 and \$74.50. Ask your dealer.

Balkite Radio Power Units

C R O S L E Y AC BANDBOX



The leading radio
of today

\$90

Without
Tubes

The Crosley Bandbox is now supplied in two models—the 602 in which the power department is separate from the receiver and the 704 in which it is housed in the same case for \$95. The two models are identical—there being no difference in the amazing performance which so definitely marks the Bandbox 1928's greatest radio.

A genuine Neutrodyne! A high degree of sensitivity! Amazing selectivity! Compare the Bandbox with any set. Convince yourself of its superiority, visit your nearest dealer and hear its wonderful performance. Write Dept. 18 for descriptive literature.

The Crosley Radio Corporation

Fowl Crosley, Jr., Pres. Cincinnati, Ohio
Montana, Wyoming, Colorado, New Mexico and West, prices slightly higher.

CROSLLEY RADIO

Crosley is licensed only for Radio Amateur, Experimental, and Broadcast Reception.



out in case of a short circuit. Next in line are the two carbon pile rheostats which are in the primary circuits of the filament transformers, and last is a switch in the 110-volt line. In addition to the r.f. chokes being behind the board, the battery charger and starting switch are also there. The starting switch is controlled by a long lever which can be seen to the left of the board. The whole power apparatus is on the opposite side of the room from the transmitter and receiver. This was done to prevent any a.c. hum in the receiver.

The antenna system is suspended between two fifty-foot poles which are supported by guy wires that are broken every eight feet with insulators. The antenna and counterpoise are made of number twelve enameled copper wire and are insulated with Pyrex. The antenna portion of the system is an inverted "L" affair, eighty-six feet long and fifty feet high. The counterpoise portion is eighty-four feet long and eight feet high. It is operated at its third harmonic for 39.5 meter transmission.

The wavemeter and Grebe CR-18 receiver can be seen in the large photo. To the right on the wall can be seen the starting lever which operates the switch which is behind the switchboard on the opposite side of the room. The little switchboard behind the receiver controls all batteries and above it can be seen the loud speaker.

The Southeastern Division Convention

(Florida Division)

MIAAMI was certainly the Mecca for the "hams" on January 13th and 14th. The Hotel Alcazar saw the registration of A.R.R.L. members and amateurs from every section of Florida besides representatives from the first, third and sixth districts. President R. B. Ladd of the Miami Amateur Radio Club, under whose auspices the convention was held, received the delegates with his bright smile and was ably assisted by E. E. Young, Secretary, who seemed to be the "jack of all trades" of the club. Quite out of the ordinary, there were no set technical meetings but plenty of "talks" by everybody. One of the interesting trips was to WAX, the Tropical Radio Co's commercial station where the delegates received a cordial reception and were given an opportunity to inspect the big tube transmitters. The one of most interest was the 20-Kw. water-cooled tube outfit working near our 20-meter band. Another good trip to show the other angle of radio was to radio broadcast station WIOD where we found an old-timer in



EVERY TRANSMITTING AMATEUR USES THESE FORMS



*—a reminder that
your supply may be low—*


AMERICAN RADIO RELAY LEAGUE LOG OF STATION						
DATE	CALLED	CALLED BY	CLASS	REMARKS	TIME	REMARKS

A. R. R. L. Log Sheets

Designed by hams for hams. 8½ x 11 bond paper, punched for standard three-ring loose-leaf binder. 125 sheets postpaid for \$1.00 or 500 for \$3.50.

Members' Correspondence Stationery

Write your radio letters on League letter-heads—it identifies you with the biggest radio organization in the world. *Lithographed* on 8½ x 11 heavy bond paper. 100 sheets postpaid for 75c or 250 sheets for \$1.70. Sold to members only.

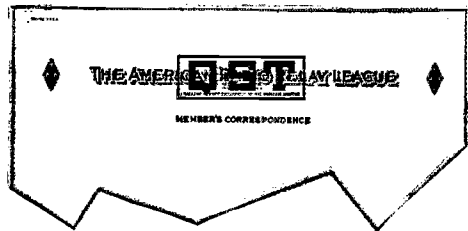

THE AMERICAN RADIO RELAY LEAGUE		HEADQUARTERS, HARTFORD, CONN., U. S. A.	
RADIOGRAM			
CITY OF ORIGIN (SEE MSG #) HARTFORD CONN	CLASSIFICATION J ME	NUMBER 187	DATE MAY 17 67
TO: <u>MEMBER HAMIL JET</u>	THIS MESSAGE WAS RECEIVED AT DATE AND TIME		
BY: <u>MEMBER</u>	RECEIVED AT		
CALL LETTERS: <u> </u>	BY: <u> </u>		
CONGRATULATIONS ON YOUR GOOD TRAFFIC HANDLING. WE'RE STOP YOU AND WISH LONGEST AND BEST. IT'S NOT ONLY THE LEAGUE FOLDING LEAGUE FOR ENJOYING OUR STOP MORE FORCE TO ALL THE AND GLAD TO SEE THAT YOU ARE PUTTING THE OLD MESSAGE SERVICE ON THE MAP STOP LOVE AND TO WISH SUCCESS IN YOUR COMMUNICATIONS DEPARTMENT			
FROM STATION	LOCATION BY	DATE	TIME
Sent	1 BYE	11/17/66	1:10 P

Official A. R. R. L. Message Blanks

Most convenient form. Designed by the Communications Department of the A.R.R.L. Well printed on good bond paper. Size 8½ x 7¼. Put up in pads of 100 sheets. One pad postpaid for 35c or three pads for \$1.00.

RADIOGRAM	
AMERICAN RADIO RELAY LEAGUE	
From	Date
Time received	Place
At Radio Station	

Message Delivery Cards

Neatest, simplest way to deliver a message to a near-by town. On U. S. stamped postals 2c each. On plain cards (for Canada, etc.) 1c each postpaid.

American Radio Relay League

1711 Park Street

Hartford, Conn.

PRECISION!

Sangamo engineering of Audio Apparatus is followed up by precision production methods gained in nearly 30 years' precision instrument manufacturing. In Sangamo Transformers and Impedances the set builder and manufacturer is thus assured of that precise matching of each unit to the designated tube so necessary for superior tone quality.

The "Yellow Spot"

Designates the Sangamo Type "A" Audio Transformer used for cascade amplification. This transformer has the flattest curve (most uniform amplification at all audible frequencies) available in any transformer at the present time. Look for the transformer with the yellow spot.


"Dark Blue"

The Dark Blue Spot identifies the Sangamo In-put Transformer for push-pull amplification. Has high inductance primary to secure high amplification on low frequencies. Accurately divided secondary gives almost identical frequency characteristic curve on each half. "Type B"—known by the dark-blue spot.

"Light Blue"

Output Transformer for push-pull amplifier having an impedance to match UX-210, CX-310 and UX-112, CX-112 tubes. Maximum transference of energy on low end of the musical scale.

Also makers of Sangamo Mica Condensers, moulded in Bakelite—made accurate and stay accurate.



"Green"

Same as above except impedance matches UX-171 and CX-371 tubes.

"Red"

The Red Spot designates the Sangamo Type "E" Output Impedance. Keeps heavy D. C. "B" current from loudspeaker windings. Tap provided for matching impedance to UX-171 (CX-371) or UX-210 (CX-310) tubes, also UX-112 (CX-112).

"Orange"

Used for impedance coupled amplification, auto-transformer coupled amplification, or as impedance in plate circuit of detector tube to prevent feedback, oscillation or "motor-boating" in transformer coupled amplifier.

Jesse Jay, chief engineer, formerly of the ninth district. Needless to say, we were well received. The Chamber of Commerce, through the courtesy of its secretary, allowed the use of the reception hall where we had a chance to see the moving picture film of A.R.R.L. headquarters and a two-reel affair, "Awakening of Rip Van Winkle", the latter kindly furnished by the Radio Corporation of America. Director Dobbs being unable to come sent Henry L. Reid, SCM for Georgia, to represent him and Henry certainly did a good job with his talk at the traffic meeting. He proved himself a most entertaining toastmaster at the Banquet. Treasurer Hebert of the A.R.R.L. got his inning during the banquet and enlightened the gathering with details of the International Radiotelegraphic Conference and ended his speech with one of his inspirational talks.

The distribution of prizes as the last event of the program has proved a very good custom. It results in the fellows' staying over until the very last, and with the generosity of the League's advertising friends makes it worthwhile. The fellows who are fortunate enough to win a prize should never forget to write the donor and express their appreciation.

With a visit to the prominent ham stations till the wee hours, this, the first Florida convention, closed with everybody expressing their thanks to 4CK, 4NM, 4NZ and 4OP.


—A. A. H.

SANGAMO ELECTRIC CO.
SPRINGFIELD, MASS.



**--at Slight Cost
--in a Few Moments
Your Set Can be AC Operated**

There is a Dongan A C Transformer designed specifically for each of the approved A C Tubes.
for instance here is No. 6512



A remarkably well-designed and sturdy A C Transformer, mounted in a crystalized lacquered case, equipped with lamp cord and plug outlet for B-Eliminator, also tap for control switch. Operated with 4 UX226, 1 UY 227 and 1 UX 171. R C A Tubes \$5.75 list.

Then you can have exactly the same transformer without plug outlet and control switch tap—No. 6515 for **\$4.75 list.**

Ranging in price from **\$3.50 to \$5.25**, there are 10 other A C Transformers, operating with the approved A C Tubes.

Send check or money order if your dealer cannot supply you.

Custom Set Builders—Write for our special proposition to Custom Set Manufacturers.

Dongan Electric Manufacturing Co.
2999-3001 Franklin St., Detroit, Mich.



I. A. R. U. News

(Continued from Page 54)

20-meter band has not been very good. Our famous ten-watt DX getter, eg5YX, has been getting over pretty well but there has been no one to work! 2CS worked several NU stations on 23 meters with an input of only two watts.

"Christmas day was wonderful for 40-meter DX and the sixes came rolling in in a bunch with fives and nines up to 1000 G.C.T. Since then, things have been as dead as possible but woke up a bit after about a week. Does anyone besides nu1SZ and nu1AWE operate on week days?"

—K. E. Brian Jay, eg2HJ.

IRISH FREE STATE

"There are now 20 stations licensed in the Free State for a maximum power of ten watts and transmission on the 45-meter band. About five of these stations also use the 23-meter band. A number of these have been rather inactive of late.

"The most active stations and those obtaining the greatest success at the end of 1927 are 12B, the station of the Wireless Society of Ireland, 18B and 17C who are in

32 Pages Bigger!

THE new edition of the RADIO AMATEUR'S HANDBOOK has 32 pages more than the last edition. That's because additional information has been inserted in all parts of the book and everything has been brought right up to date. Two hundred and sixty-six pages of dope, data and details—all for one dollar, postpaid anywhere.

OF course you can struggle along with the old edition—or it's even possible that you can do without the Handbook entirely—but why handicap yourself when it costs only a dollar to have the new Handbook in reach whenever you need some radio information?

*This is
easier than
writing a
letter* →

AMERICAN RADIO RELAY LEAGUE,
Hartford, Conn.

Here's my dollar—you know what I want.

Name.....

Address

NEW!

Transmitting Apparatus at New Low Prices

REL 20 & 40 meter or 40-80 meter transmitting inductance (two coils, rods and clips) **\$8.85**

NEW THORDARSON TRANSFORMERS

1/2 volt filament transformer for UX 210s **\$6.10**

12 volt filament transformer for UV 203A and UX 562 **\$7.95**

100 watt plate transformer, 550 and 750 volts, either side of center tap **\$14.35**

500 watt plate transformer, 1500 and 2000 volts, either side of center tap, special for UX 552 tube **\$25.75**

JEWELL 3 in. flush mounting AC and DC volt-meters, scale readings up to 80 volts **\$5.95**

D. C. milliammeters, any scale reading **\$5.95**

Antenna thermo-ammeters, any scale reading **\$9.75**

CARDWELL NEW TYPE-TRANSMITTING CONDENSERS

Type T 153, 6000 volt, .0015 MFD **\$8.95**

Type T 159, 3000 volt, .0035 MFD **6.45**

Type 147 B, 3000 volt, .0045 MFD **6.45**

Type 164 B, 3000 volt, .0025 MFD **6.45**

GRID Large General Electric 5000 ohm **\$1.45**

LEAKS " Ward-Leonard Cent. tap 5000 ohm **2.45**

Ward-Leonard Cent. tap 15000 ohm **5.45**

Ward-Leonard 5000 ohm Cent. tap **1.80**

Crescent Lavite special 5000 ohm leak **2.25**

Allen Bradley variable transmitting leak **2.95**

FIXED CONDENSERS

SANGAMO Large .002 mfd, 500 volt **\$.50**

Condensers .002 mfd., 5000 volt **1.75**

DUBILIER .002 500 volt **1.95**

FLECHTHEIM 2mfd 1000 volt, test 800, working **2.75**

Guaranteed 1mfd 1000 volt " " **4.75**

Filter 1mfd 2000 volt, test 1500, working **2.75**

Condensers 2mfd 2000 volt " " **4.35**

1mfd 2000 volt " " **6.95**

(Flechtheim filter condensers are guaranteed against break down. Blown condensers will be promptly replaced without charge.)

PYREX STANDARD SOCKETS *For 202s, 210s, etc. **65c**

RADIO 2MA CO.

168 Washington St., New York

Dublin and a newcomer, 11D located in Naas, County Kildare.

"During the past few months, 12B has been engaged in making observations on the 'skip effect' on the 45-meter band. Some test work on 23 meters has also been done and it is hoped that regular transmission on that wave will be made in the early part of the new year.

"17C has been doing some fine telephone work on 45 meters and has been able to work Canada recently. He continues to keep up his good work on the 23-meter band and in addition to raising many NU stations was the first to work a Brazilian station. He



THE ABOVE IS A VIEW OF eg5ML

The panel to the left of the one holding the tubes, is the crystal oscillator which couples into the main transmitter for 45-meter work. The antenna system is of the current feed Hertz variety and keying is done in the feed line. A 100-ohm resistor is placed across the key to eliminate clicks. Underneath the table are accumulators for filaments and grid bias for the crystal transmitter. Main supply of high voltage comes from a motor-generator set.

uses the 220-volt d.c. house mains for plate supply. A fairly long inverted "L" antenna makes up the radiating system.


"Reports on signals from any GW stations will be welcomed and with QSL cards should be addressed to Wireless Society of Ireland, 12 Trinity Street, Dublin, C.I., Irish Free State."

—H. Hadgens, Hon. Sec., Wireless Society of Ireland.

NORTHERN IRELAND

The last few months seem to have been a period of comparative inactivity among transmitters in Northern Ireland. There has been little startling DX achieved if, indeed, any DX is now considered startling, and many stations report conditions exceptionally poor. It has been suggested that this may have some connection with the fact that the sun spots are at present at their maximum. It is understood that these sun spots perform a complete cycle in 11 years, i.e., they would have been at a minimum seven and a half years ago. The writer and several others are inclined to

— QST nu9 FO — JUST OUT!

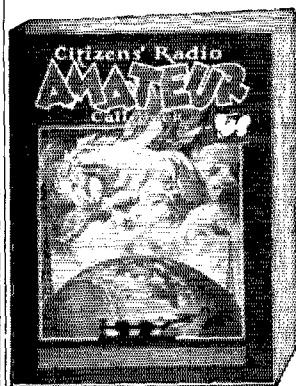

March
Number

U. S. and Canada

\$1.00 Each

(Foreign \$1.10)

ONE YEAR

(3 Issues)

For \$2.50

(Foreign \$2.75)

Amateur and Commercial Stations
From 80 Countries

Citizens Radio Service Bureau

Room 751, 508 So. Dearborn St., Chicago, U. S. A.

THE AMATEUR'S BOOKSHELF

Readers of *QST* appreciate the need for good radio books. What we consider to be the best standard text books are handled by A. R. R. L. Headquarters for the convenience of members of the League and readers of *QST*. Those listed below pretty well cover the requirements of the average amateur or experimenter.


Radio Telephony For Amateurs, by Stuart Ballantine. The most valuable single book that we know of for the amateur. Theory, construction, practice. Not particularly about telephony. Heartily recommended for every amateur. 296 pp., 5½ x 8¼	\$2.00
Manual of Radio Telegraphy and Telephony, by Commander (now Admiral) S. S. Robison, U. S. N., published by the Naval Institute. "Ranks with the very best of all published radio matter . . . Not only worth its cost but is perhaps the best radio book that ever came to this desk."— <i>QST</i> Book Review. 895 pp., 6¾ x 10	5.50
Experimental Radio, by Prof. R. R. Ramsey. Revised Edition. The book for the experimenter. A laboratory manual, describing 85 excellent experiments that help in understanding radio work	2.75
Principles of Radio Communication, by Prof. J. H. Morecroft. An elaborate general textbook. 935 pp., 5¾ x 9	7.50
Radio Engineering Principles, by Lauer & Brown. An excellent general textbook	3.50
Thermionic Vacuum Tube, by H. J. Van der Bijl	5.00
Radio Frequency Measurements, by Moulin	10.00
Practical Radio Telegraphy, by Nilson & Hornung	3.00
Prepared Radio Measurements, by R. R. Batcher	2.00
Elements of Radio Communication, by Ellery W. Stone	3.00
Wireless Pictures and Television, by T. Thorne Baker	2.50
Radio Questions and Answers, on Government Examination for Operators, by A. R. Nilson	1.00
How to Pass The U. S. Government Wireless Examination, by E. E. Bucher60
Radio Simplified, by Kendall & Koehler, revised by J. M. Clayton	1.00
Ideas For The Radio Experimenter's Laboratory, by M. B. Sleeper25
Henley's 222 Radio Circuit Designs, by Anderson, Lewis and Mills ...	1.00
Henley's Workable Receivers, by Anderson and Lewis	1.00

Prices include postage

Read 'em and learn!

AMERICAN RADIO RELAY LEAGUE, INC.

1711 Park Street - - - - Hartford, Conn.

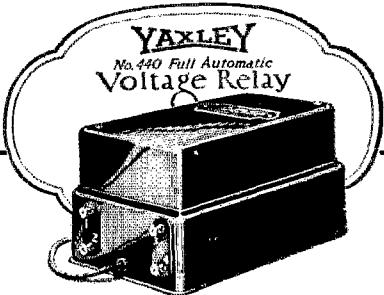

For automatically switching on and off your B Eliminator and Charger, or either, and in addition, automatically switching off your Charger when the battery is fully charged. With the Full Automatic Voltage Relay it is now practical to utilize the advantages of a high rate charger and at the same time control the switching of the charger as well as the B eliminator with the switch or filament control on the set.

NO. 440.....\$7.50

YAXLEY MFG. COMPANY
Dept. S, 9 So. Clinton St.
Chicago - - - Illinois


think that there has been a steady falling off in DX conditions during the past few years (making due allowance for the greatly improved apparatus, new wavebands exploited, et cetera). There seems to be an opportunity for some cooperative observation by amateurs throughout the world during the next few years and a possibility of reaching some interesting conclusions.

"A report from 6YW is to the effect that NU signals are often good on the 80-meter band on nights when they are poor on the 40-meter band. Why not try some more transatlantic work on 80 meters?"

—E. Megaw, Area Manager for Northern Ireland, R. S. G. B.

ITALY

Mr. Franco Pugliese, secretary to the Italian I. A. R. U. Section, returned to Italy in November after traveling to Capetown with a scientific expedition which left Italy in April, 1927. He is the owner and

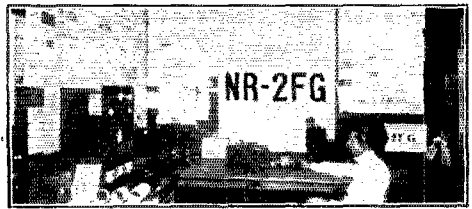

IN SAN JOSE, COSTA RICA MAY BE FOUND nr2FG, THE STATION VIEWED ABOVE

A pair of 203-A tubes are used in a T.P.T.G. circuit for 34-meter work. For 20 meters, either a 203-A or 852 is used. Plate supply is obtained from a 1,000-volt motor-generator set and filaments are heated from two 120-ampere hour storage batteries. Two masts that are 74 feet high and 110 feet apart support the ninety foot single wire inverted "L" antenna used against a ninety foot counterpoise for transmission. A separate antenna is used for receiving. The present receiver is a Grebe CR-18.

Five Times More Accurate than the Average Resistor

When extreme accuracy is vital get Harfield Resistors. They can be supplied to you as accurate as plus or minus 1%—five times more accurate than the average resistor. And they are guaranteed to maintain that accuracy under average load conditions.

Harfield Resistors are available in various capacities up to 50,000 ohms at 10 or 20 watts. Tell us about the resistor you want, and let us make a sample for you with prices. Write to

HARDWICK, FIELD, INC.



SALES OFFICE
100 Fifth Ave.
New York City

FACTORY
215 Emmett St.
Newark, N. J.

operator of the short-wave equipment which worked many amateurs under the call of xeilFP.

The object of carrying radio equipment was to study, in connection with military and amateur stations, the propagation of waves between fifty and fifteen meters at both short and great distances.

The main transmitter was a two-hundred watt affair which was supplied from the 600-cycle ship's generator. In addition to this, a portable transmitter using a single UX-210 fed with 200 volts from batteries was carried along. A "Bourne" two-valve receiver and a short-wave superheterodyne comprised the receiving equipment. The antenna was a single wire 22.5 meters long, which though entirely screened by the metallic surroundings of the ship, gave excellent results both in reception and transmission.

Regular contacts were established on 33 meters with African and American stations at distances greater than 11,000 kilo-

MORE SPECIAL OFFERS




UNI-RECTRON POWER AMPLIFIERS



MODEL AP-935

AS the Uni-Rectron stands it is a super power amplifier, which can be used in connection with any radio set and loud speaker. Binding posts are provided for input to the Uni-Rectron and output to the speaker. Requires no batteries for its operation. It obtains its power from the 110 Volt, 60 Cycle alternating current lighting circuit of your house.



The UX-210 super power amplifying tube and the UX-216B or 281 rectifying tube are used with this amplifier, which cannot overload. From the faintest whisper to the loudest crash of sound—R.C.A. Uni-Rectron amplifies each note at its true value. High and low notes are all treated alike.

The volume and quality delivered will be a revelation.

Also by removing the input and output transformers it can be used as a source of power for an oscillating or transmitting tube, furnishing power for all circuits, grid, plate and filament and is the cheapest form of Power Supply for Amateur Transmitting purposes ever offered.

LIST PRICE \$88.50
(Without Tubes)

SPECIAL at \$19.75
EA.



KENOTRON RECTIFYING TUBES

(TYPE T. B. 1)

MFD. BY GENERAL ELEC. CO.



These rectifying tubes operate on a filament voltage from 8 to 10 Volts and draw 1 1/2 amps. They will safely stand an A.C. input voltage up to 750 Volts and pass plenty of current and voltage for the plate of the Transmitting Tubes.


They are also very efficient rectifiers for use in "B" Battery Eliminators.

STANDARD BASE
NEW IN ORIGINAL CARTONS

PRICE ONLY \$1.25
EA.

TYPE E-210 BRADLEYSTATS

MFD. BY
ALLEN-BRADLEY CO.



Bradleystat E 210 is a compact graphite disc rheostat well suited for filament and plate control applications.

By using it in the primary circuit of the Transformer the center tap is not displaced and the Transmitter efficiency is greatly improved.

One knob provides noiseless, stepless control. Can also be used to control output of Eliminators or Power Packs. NEW.

LIST \$4.00

SPECIAL at \$1.60
EA.

AMERICAN SALES CO., 21 Warren St., New York City

QUARTZ CRYSTALS

Prepared for Maximum Piezoelectric Effect

One inch sections ground to within 1% of your specified frequency:

75-100 meters	\$17.50
100-200 meters	10.00
200-500 meters	15.00

Blanks, 2 to 3 mm. thickness 7.50

All sections guaranteed free from flaws or twinning and tested for oscillation without regeneration.

Quotations on request for crystals of any practicable specifications.

J. T. ROONEY, B. Sc., 31 CALUMET BUILDING, BUFFALO, N. Y.

"Ten years of crystallographic experience"

JACOBS ANTENNA SPREADER



Patented Sept. 8, 1926; Sept. 7, 1928

Made in both 5 in. and 7 in. diameters

For Erecting 4, 6 or 8 Wire Cages Antenna or Counterpoise in active use at 58 U. S. and 7 Foreign Broadcasting Stations; also many ham stations. Price \$6.00 per dozen; \$3.25 for a half dozen.

Descriptive circular upon request.

CHARLES F. JACOBS, (2EM)
279 Park Place, Brooklyn, N. Y.



Get the ADVANCE "Sync" RECTIFIER

GET this improved "Sync" Rectifier. Superiority proven by its prevailing use in international transmitting. Lower in price in spite of higher quality.

The Advance Sync Rectifier meets all requirements for heaviest duty. Improves all transmission—giving clearer tone and better volume. Can be easily and quickly filtered.


Simple starting. Requires no attention—always ready. With 1/4 H.P. Westinghouse motor, \$35.00 complete.

Get the best. Write now for free descriptive folder

ADVANCE ELECTRIC COMPANY
1260-1262 West Second St., Los Angeles, Calif.

Ad. Auriema, Inc.
 Manufacturers' Export Managers
 146 Broadway, New York, N.Y.
 Specially equipped to economically export dependable receiving and transmitting radio apparatus.

Model "N"
 Vario Denser

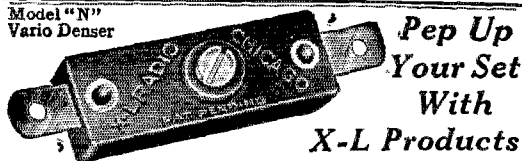

**Pep Up
 Your Set
 With
 X-L Products**

Tune quickly—adjust accurately—eliminate distracting noises—get correct tube oscillation—with X-L VARIO DENSERS in your circuit.

Designers of all latest and best circuits specify and endorse.

MODEL "N"—Micrometer adjustment easily made, assures exact oscillation control in all tuned radio frequency circuits. Neutrodyne Roberts 2-tube, Browning-Drake, Silver's Knockout. Capacity range 1.8 to 20 Mfd. Price \$1.00.

MODEL "G"—Obtains the proper grid capacity on Cockaday circuits, filter and intermediate frequency tuning in super-heterodyne and positive grid bias in all sets. Capacity range.

Model G-1 .0002 to .001 Mfd. Model G-5 .001 to .005 Mfd. Model G-10 .003 to .01 Mfd. Price each with grid clips \$1.50.

X-L PUSH POST—NEW! Bakelite Insulated. Push it down with your thumb, insert wire, remove pressure, wire is firmly held. Vibrations will not loosen, releases instantly. Price each 15c.

Also in strips of 7 on black panel marked in white. Price \$1.50.

FREE New up-to-date book of wiring diagrams showing use of X-L units in the new LOFTIN-WHITE constant coupled radio frequency circuit, and in other popular hook-ups, also the Goodwin Aperiodic Detector Circuit, applicable to any set; adds a stage without added tuning controls. Write today.

X-L RADIO LABORATORIES, 2428 No. Lincoln Ave., Chicago, Ill.



**X-L PUSH
 POST**

WAC

meters (6,875 miles), although difficulty was experienced in working Europeans at great distances. It was found that the 44-meter wave used by most of the Europeans didn't cover distances greater than 4,000 kilometers (2,500 miles) when transmission was in a north-south direction.

No noticeable change in signal strength was observed on WIZ (43.02 meters) and U.S.A. amateur stations. In general, all signals between 30 and 40 meters coming from the west were received with approximately the same signal strength when we were on either the eastern or western coast of Africa.

It was noticed that the signals from WIZ and IDO and others working on waves between 30 and 40 meters faded away completely when daylight appeared while PCRR, FY and others around 20 meters were readable at nearly all hours though considerable fading occurred during daylight. The position of the station did not seem to effect the signal strength on 20 meters, European stations being received as well as WIK and ANF (Java).

A splendid time was had in visiting the South African amateurs, among which are to be found many excellent stations, a good amateur organization and plenty of real "ham" spirit. It was quite surprising to hear 6th district U.S.A. stations in the early afternoon as it is very difficult to hear them even at night in Italy. On the other hand, it was considered quite a record to receive the Zedders which may be worked rather easily from Italy.

A large number of stations in South and North America, Africa and Europe were worked with both transmitters. The smaller set proved to be nearly as effective for DX as was the 200-watt set.

Short-wave radio once more proved its great advantages and when used on ships sailing for distant countries, offers a possibility of obtaining news from the home port each day and, what is more important, an opportunity of comparing the ship's clock with the standard time. This is a very important point particularly in places where the long-wave stations cannot be heard. There are, no doubt, many problems still to be solved. Chief among these is the avoiding of interference caused by ventilators and other motor driven devices commonly found on ships and which often render reception of short-wave signals impossible.

We would like to point out once more that even if you have worked all continents, you are not a member of the WAC Club until you have a certificate of membership. We have recently seen some QSL cards indicating a certain station to be a member but have failed to find that particular call on the list. We are assuming this to have been done through ignorance and trust that this mention will be all that is necessary to clear up the matter.

RADIO SCHOOL
 Send for Catalogue
**MASSACHUSETTS RADIO and
 TELEGRAPH SCHOOL**
 NEW TERM JAN. 3
 18 Boylston St. Boston, Mass.

VITROHM Transmitting Grid Leaks and Rheostats now cover the entire line of transmitting tube circuits. ¶The prices on these amateur products are reduced materially. ¶Your dealer should stock Vitrohm Transmitting Products. ¶If you have difficulty in obtaining them, write us direct.

CATALOGUE NUMBER	PRODUCT	RESISTANCE	DISSIPATION	CURRENT	MAX. TUBE RATING	PRICE
507-2	Grid Leak*	5000 ohms	44 watts	90 m.a.	100 watts	\$2.00
507-3	Grid Leak*	5000 ohms	200 watts	200 m.a.	1000 watts	2.80
507-4	Grid Leak†	50,000 ohms	200 watts	60 m.a.	1000 watts	6.50
507-5	Grid Leak†	20,000 ohms	200 watts	100 m.a.	1000 watts	4.25
507-51	Grid Leak*	10,000 ohms	200 watts	135 m.a.	1000 watts	4.00
507-66	Grid Leak**	15,000 ohms	200 watts	120 m.a.	1000 watts	6.00
507-63	Rheostat†*	50 ohms	50 watts	1 amp.		5.50
507-59	Rheostat**†	20 ohms	80 watts	2 amp.		5.50
507-83	Rheostat**†	12.5 ohms	60 watts	2.2 amp.		5.50

* Center-tapped

† DeForest P or R. C. A. 852 Tube
De Forest H Tube

** Steps at 5M—10M—15M

for R. C. A. 852 or DeForest P Tube

†* For Primary Control

†† Filament and Primary Control

Ward Leonard Electric Company

37-41 South Street

Mount Vernon, N. Y.

Are You Properly
Keeping Your
1927 Copies of
QST As Issued?

One-
fifty
each,
post-
paid



Note the wire fasteners.
Unnecessary to mutilate
copies. Opens and lies
flat in any position.

A binder will keep your QSTs always
together and protect them for future use.
And it's a good-looking binder, too.

QST
1711 Park St., Hartford, Conn.



GRIDLEAKS

15,000 ohm, tapped at 5,000 and 10,000 ohms
with 85 watt capacity.....Price, \$1.50
20,000 ohms, 85 watt for UX852..... 1.50
5,000 ohms, 85 watts 1.00
5,000 ohms, 20 watt for one UX210.75

Postpaid

Send for Catalogue

UTILITY RADIO CO.

80 LESLIE STREET EAST ORANGE, N. J.

FREE Wholesale Radio Catalog

Our new 1928 catalog is jammed full of
the newest offerings of nationally known radio parts.
kits, sets, accessories, table and console cabinets, etc.
Whatever your radio need may be it's in our 1928
catalog. Also contains *Short Wave Section* showing
the finest receiving and transmitting apparatus.
Write for this big catalog—and for our
confidential discount sheet—but write immediately.

SHURE RADIO CO., 347H West Madison St., Chicago, Ill.

1928
WHOLESALE
RADIO
CATALOG


REMOTE CONTROL

Perfected for your mercury arc. Absolutely no
comparison with any other rectifier. Operates
any tube at any power. New handbook says
"The Arc Filters Beautifully." The plate power
for your set you have always wanted—you can
have it now. Your rectifier problems solved.

RECTIFIER ENGINEERING SERVICE

4837 Rockwood Road

Cleveland, Ohio

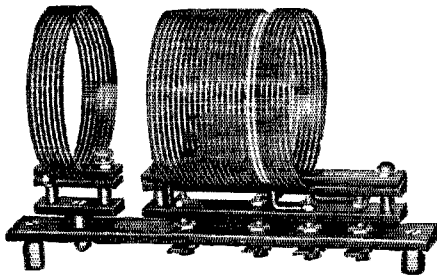

The **NEW CHI-RAD**
Short Wave Coils
20—40—80 Meter Band

Designed by Chi-Rad engineers to meet the demands for an extremely efficient short wave coil. Complete with mounting, hardware and three interchangeable plug-in coils to cover 20, 40 and 80 meter wave bands. These coils are noteworthy for their convenience in design, neatness in appearance and sturdiness in construction. All plugs give positive contact.

Chi-Rad Short Wave Coils Complete for 20, 40 and 80 meter band\$10.00
Extra coil for broadcast band\$ 4.00
Dealers and Set-builders—write for further details and discounts.

Chicago Radio Apparatus Co.
415 South Dearborn St. Chicago, Ill.

POWER TRANSFORMERS

GUARANTEED—MOUNTED—COMPLETE

At Least 10% Cash Must Accompany Order

1 Kw. 2000-2500v each side	\$35.00
100 watt 350-550 each side	10.00
200 " fil. trans 8 or 12 v	7.50
700 " 1000-1500 v each side	15.75
700 " 2000-2500 v each side	26.00
250 " 550-750 v each side	12.00
250 " 25 cycle 500-800 v	16.00
700 " 25 cycle 1000-1500 v	22.00
700 " 25 cycle 2000-2500 v	28.00
200 " 25 cycle 8 or 11 v fil	11.00
30 Henry 150 mil choke	10.00
50 Henry 150 mil choke	12.00

9CES, F. GREBEN
1927 S. Peoria Street, Chicago, Ill.

QST Oscillating Crystals

NEW LOW PRICES

Prices for grinding POWER CRYSTALS for use in the various Amateur bands as follows:

150-200 Meter band	\$13.00
75-85.6 Meter band	\$22.00
37.5-42.8 Meter band	\$38.00

We state the frequency accurate to a tenth of one per-cent. Immediate deliveries, and all crystals guaranteed.

BROADCAST BAND

Prices for grinding crystals to your assigned frequency, accurate to PLUS OR MINUS 500 CYCLES are reduced to \$45.00 UNMOUNTED, or \$55.00 MOUNTED. Three day shipment, and all crystals guaranteed. In ordering please specify type of tube with which the crystal will be associated. Crystals ground to any frequency between 40 and 10,000 Kilo-cycles. Let us quote prices for your particular requirement.

SCIENTIFIC RADIO SERVICE

"THE CRYSTAL SPECIALISTS"
P. O. Box 86 Dept. V Mount Rainier, Maryland.

There are now 121 members and a repetition of all these calls will take up a lot of space and inclines one to just skip over them instead of really noting who they are. We are, therefore, listing the calls of the four additions since the appearance of the last roster. They are sb1AO, nu1CMP, foA4V and eg5YX.

The intermediate AG is assigned to Georgia, Armenia and Azerbaijan which are states of the U.S.S.R. They are in Europe and not in Asia as the intermediate indicates and it should be noted that contact with stations in these states cannot be accepted as Asian contacts in applications for WAC membership. They will be accepted only as European QSOs.

NEW ZEALAND

On page 72 of the November, 1927, QST, the mailing address of the New Zealand Association of Radio Transmitters was given as Box 733 whereas the correct address is P. O. Box 779, Auckland, New Zealand.

NEW ONES

- aeAEP—P. Pah, Post Office No. 1, Bangkok, Siam. 36 meters, d.c. (7BB)
- af8FOK—Rene Lebon, Section des Telegraphistes Coloniaux, Saigon, French Indo China. (8CFL)
- ai2KT—Lieut. F. Rodman, The Worcestershire Regiment, c/o Lloyds Bank, Hornby Road, Bombay, India. (8CFL)
- aq1MDZ—Sgt. J. H. Williams, R. A. F., Mosul, Iraq. (8CFL)
- arOCOBK—Rev. G. H. J. Horan, Observatoire de Ksara, Saad-Nail pa Beyrout, Grand Liban, Syria. (8CFL)
- ed7NI—Niels Jacobsen, Bredgade 29, Copenhagen, Denmark. (1CRA)
- eg6AM—W. N. Noble, 1 Pickwick Rd., Dulwich, London S.E. 21, England. (8CFL)
- eg6YL—(Miss) Barbara Dunn, Lilystone Hall, Stock, Essex, England.
- eh9XC—Max Wuest, Bavanue des Tillevis, Lausanne, Switzerland. (2GX)
- ei1BB—Francesco G. Leskovic, Udine, via C. Percoto, 6-2, Italy.
- fe2VO—Cairo, Egypt. (1LX)
- feEGEZ—A. Nahmias, 5 Rue Emad-el-Dine, Cairo, Egypt. (8CFL)
- fk5CR—Sidney A. Pegrume, P. O. Box 23, Kenya Colony, British East Africa.
- niTFHV—Dr. Hans J. Vogler, Akureyri, Iceland. 32 meters. (8CFL)
- nm1NG—Apartado 511, Mexico City, Mexico.
- nq2CF—Camp Columbia, Havana, Cuba.
- nq5RY—Box 228, Matanzas, Cuba.
- sh1MS—M. Solomon, Mackenzie City, Demerara River, British Guiana. (Will be used instead of sh6BR as given on page 46, August, 1927.)
- sb2AL—Joao Levy Silva, 44 Rua Arthur Prado, Sao Paulo, Brazil.

California Man Has a Talk With MacMillan in the Arctic

LONG BEACH, Cal., Oct. 5 (AP).—Radio communication with the Donald B. MacMillan expedition in the Arctic was established here last night by Don C. Wallace, an amateur. Wallace picked up WMP, the MacMillan station, and exchanged numerous messages with G. E. Himoe, the expedition operator.

The expedition is preparing to dig in for the Winter, Himoe said. Snow began falling yesterday just as members of the party finished ungluing the roof of their quar-

JERSEY AGAIN PICKS UP MACMILLAN WIRELESS

Expedition Now in Its Winter
Quarters, Radio Operator Tells
Absecon Amateur.

Special to The New York Times.

ATLANTIC CITY, N. J., Nov. 26.

A ten-minute conversation with the MacMillan Arctic expedition was reported by Emerson T. Showell, 204-year-old amateur radio operator, from Absecon today.

Showell was transmitting over a set of seven and one-half watts output, a twenty-meter wave length and an inside aerial. He spoke with Arctic Circle operator short-

The MacMillan Expedition is equipped with "ESCO" Motor Generators.

ELECTRIC SPECIALTY COMPANY

Trade "ESCO" Mark

522 South Street

Stamford, Conn., U. S. A.

Makers of Motor Generators and Dynamotors with the least ripple and the most miles per watt.




Build Satisfaction Into Your Set

Building satisfaction into their transmitter is the goal of all amateurs. In this connection the selection of instruments which are sure to give satisfaction is not hard. Jewell transmitting instruments for amateurs, Patterns No's 64, 64 and 74, known as the Jewell Trio, have and are still making transmitting history.

Most amateurs use Jewell instruments and they give unlimited satisfaction. They are properly designed and ruggedly constructed of best available materials, insuring high overload capacity with sustained accuracy.

Write for a copy of our Radio Instrument Catalog No. 15-C, which describes our instruments in detail.

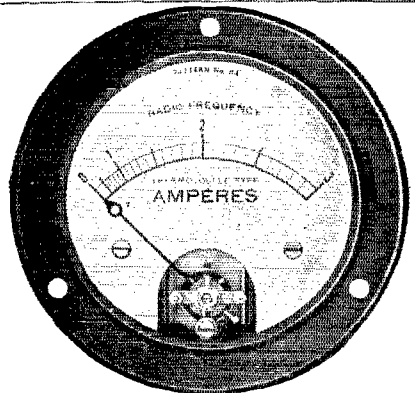


Pattern No. 64 Radio Frequency Ammeter is a thermo couple type instrument with well known qualities of accuracy and high overload capacity. The loss in the instrument is less than one-half of the minimum required by the Navy, and the instrument is guaranteed to stand a 30% overload.

Jewell Electrical Instrument Co.

1650 WALNUT ST., - - CHICAGO, ILL.

"28 Years Making Good Instruments"

Centralab MODULATOR and Standard RADIOHM



With Exclusive Features

The exclusive Centralab construction of making contact on a resistance element by a pressure shoe and tilting disc, assures long life and permanently noiseless adjustment, providing gradual, silent control of oscillation or volume.

Centralab Modulator has 3 terminals and a special taper of resistance to provide smooth, noiseless volume control from a whisper to maximum. A sure cure for over-modulated tubes and harsh amplifiers. Resistance 250,000 or 300,000 ohms, \$2.00. 300,000 ohms with "A" battery switch combined in one unit, \$2.30.

Centralab Radiohm is made with a resistance taper correct for every circuit. Can be smoothly varied throughout their entire range from zero to 500,000 ohms, and give full resistance variation with a single turn of the knob. Not inductive; no sliding contacts carrying current. Exact resistance values are maintained as adjusted. Resistances 2,000, 25,000, 50,000, 100,000, 200,000 or 500,000 ohms, \$2.00. 200,000 and 500,000 ohms with "A" battery switch combined in the one unit, \$2.30.

At your dealer's or C. O. D.
Send for circuit literature.

Central Radio Laboratories
20 Keefe Avenue Milwaukee, Wis.



Calls Heard

(Continued from Page 55)

F. H. Black, 71 No. Central Ave.
Wollaston, Mass.

(Calls Heard from Nov. 19-Dec. 19.)

ea-em ea-kl eb-4ai eb-4au eb-4eb eb-4ex eb-4rs
eb-4tm eb-4yz ee-ea6 ee-ea10 ee-ea74 ee-ea82 ef-8ba
ef-8bf ef-8ca ef-8ep ef-8ct ef-8dm ef-8fr ef-8kg
ef-8orm ef-8zm eg-2ec eg-2od eg-2qm eg-2aw eg-2xy
eg-5ad eg-5bd eg-5by eg-5hs eg-5la eg-5ma eg-5ml eg-5qi
eg-5xz eg-6fz eg-6nf eg-6oo eg-6rb eg-6vp eg-6yu
eg-6yv eg-6za eg-6zr eg-2it egl-6wg ei-1ay ei-1er
ei-1de ei-1xw ek-4uah ei-1aa ei-1ag ei-1be ei-1bl
ep-3am ei-1co ew-h4 fe-2vo fm-8mb fo-a3e fo-a3z
fo-a4x fo-a7n fq-pm nc-1br nc-3fu nc-3ia nc-3kp nc-4r
nc-4et nc-4ed nc-4fv nc-4ha nc-4rv nc-9ai nc-9aq
nc-9bz nd-hk ne-8ae ne-8wg nx-uf nl-gren nm-9a
nm-cyy nm-x51 nm-xc52 nn-1nic nn-4jg nq-2cf nq-2jt
nq-5nin oa-2ry nq-7ex nr-2ags nr-2ea nr-2fg nx-1xl
oa-2bv oa-2br oa-2iy oa-2rb oa-2rc oa-2rx oa-2ul oa-2yl
oa-2xi oa-3hr oa-3jk oa-3we oa-4cg oa-4lj oa-4nw
oa-5hg oa-5th oa-5mb oa-5wh oa-6mu oa-6sa oa-7bq
oa-7hl oo-bam oz-2bp oz-2zo oa-dw4 sa-fb4 sb-1aa
sb-1ah sb-1ak sb-1ao sb-1ag sb-1aw sb-1be sb-1bg
sb-1bl sb-1br sb-1ca sb-1eg sb-1fb sb-1ic sb-2ag sb-2aj
sb-2ao sb-2ax sb-2ay sb-2ig sb-3ac sb-7ah sb-1lb sc-2ar
su-1ao su-1oa su-2ak su-2ks sb-6jz sb-6jg sb-6jk sb-6j
irl j2 kfzq nqz nm-cvj oxd oed oie oik oze pbr pop
ptag sfv anni spw suc2 sws vej wnp xnu-4fq xwab
6xo.

2CMX, 240 Washington Avenue, Rutherford,
New Jersey

(20-meter band)

4bl 4bn 4dm 4ei 4bz 4kw 4nd 4nl 4nn 4ob 4pq 4sb
4si 4st 4tk 4vz 4we 4ls 4bn 4gt 4pm 4vz 4yl 4yb 4af 4ak
4uqe 4ara 4avs 4zav 4am 4ih 4uf 4vz 4ags 4anx 4ary
4avj 4eche 4cgo 4csw 4cgy 4bm 7fe ne-1ar ne-3gg
nc-4et nc-4fo nc-4fs nc-4fv nc-4gg nc-4hh eb-4au
wnp.

et-TPAR, J. Ziembicki, Lwow, Bielowskiego 6,
Poland


1akm 1mv 1awm 1fl 1xv 1alw 1acu 1bxl 1bgq 1si
1azd 1oa 1yb 1lv 1vz 1cek 1xi 1cjc 1cmf 1br 1ckp
1aj 1avt 2awf 2md 2aev 2amh 2ahf 2amg 2awv 2amf
2erb 2tp 2ase 2bfm 2vp 2exl 2ard 2dh 2bs 2bav
2bdu 2car 2vm 2cty 2ow 3av 3ep 3sj 3alq 3aik
3etr 3bv 3aed 3rn 3am 3aul 3au 3au 3brd 3vd 3dad
3rv 3mx 3erj 3eld 3euj ag-rann ai-2bg ai-2kt ai-2kw
ai-2kx au-1lm aqimd az-lhf as-1lra as-35ra as-42ra
fb-8fd ff-8ct fm-8st fm-8jo fm-8vx fm-ai fm-8rit
fo-05t ea-na ea-ty ea-pp ea-mm ea-by ea-ai ea-spo
ea-tp ea-ty ea-tx ea-wg ea-vu eb-4ac eb-4ar eb-4ai
eb-4au eb-4bc eb-4bl eb-4bt eb-4bu eb-4cb eb-4cd
eb-4co eb-4cm eb-4db eb-4dj eb-4el eb-4em eb-4ft
eb-4ht eb-4td eb-4uu eb-4zz eb-n83 eb-1rv eb-1kx
ec-2un ec-2yd ed-7bl ed-7hi ed-7bb ed-7nd ed-7gz ee-ea1
ee-ea35 ee-ea40 ee-ea7f ef-8acj ef-8aro ef-8abc
ef-8blr ef-8bw ef-8htr ef-8ep ef-8eq ef-8ek ef-8cn
ef-8ctn ef-8ec ef-8et ef-8dot ef-8dmf ef-8eo ef-8est
ef-8fas ef-8fk ef-8fd ef-8flm ef-8fz ef-8fbm ef-8gdb
ef-8grg ef-8gi ef-8gyd ef-8hco ef-8he ef-8hp ef-8ik
ef-8jmm ef-8jak ef-8kz ef-8ku ef-8kp ef-8kl ef-8kol
ef-8ll ef-8la ef-8lb ef-8ll ef-8lav ef-8mmp ef-8ma
ef-8mop ef-8nno ef-8nox ef-8orm ef-8oap ef-8ou
ef-8pme ef-8prf ef-8pl ef-8pam ef-8pns ef-8rpu ef-8syy
ef-8sq ef-8ren ef-8tdo ef-8toy ef-8tra ef-8vxx ef-8xf
ef-8xu ef-8xo ef-8zd ef-8zb ef-8znd ef-8zq eg-2ab
eg-2dl eg-2nm eg-2ef eg-2so eg-2sc eg-2yu eg-2od
eg-5ml eg-5qv eg-5ph eg-5yu eg-5yn eg-6ht eg-6zf
eg-6rb eg-6yv eg-6vp eg-6ll eg-6hj eg-6td eg-6hp
gi-6mu eh-8xf ei-1ay ei-1au ei-1am ei-1bs ei-1bm
ei-1ce ei-1es ei-1el ei-1er ei-1dm ei-1de ei-1dg ei-1dr
ei-1db ei-1ed ei-1eh ei-1ea ei-1fo ei-1gl ei-1gd ei-1kz
ei-1mg ei-1no ei-1nm ei-1xw ei-1aa ek-4aar ek-4af
ek-4au ek-4cb ek-4ck ek-4db ek-4da ek-4fn ek-4hf
ek-4hy ek-4oa ek-4uah ek-4ud ek-4uak ek-4uf ek-4vb
ek-4vj ek-4vl ek-4vae ek-4yo ek-4xy ek-4zdf ek-4fk
el-1alx el-1als el-1gn el-1alr el-1all em-smuf em-smuk
em-smuv em-smua em-smtd em-smtd em-smte em-smto
em-smtn em-smvs em-smzy em-smzf em-obc em-oml
en-2p ep-lag xep-lma ep-3am ep-5aa es-1co es-2naa
es-2nx es-2nm es-5nk es-5dma es-5fd es-6fn etp-ach
etp-bb etp-bn etp-om etp-2t etp-3o eu-6ra eu-09ra
eu-16ra eu-20ra ew-xx nc-lac nc-2bc nc-2do ne-sae

At \$6.00 this famous
Cabinet
has no
equal!

THE BLUE RIDGE
7x18x10" Mahogany or Walnut Finish

Send your order or write for
catalog and full information. 12
hour service, factory to you.

Southern Toy Co. Inc.
Manufacturers Hickory N.C.



PACENT DUO-LATERAL COILS

TODAY — as
eight years ago —
PACENT coils are the popular choice
of experimenters, engineers and labor-
atories.

A complete line always on hand
together with mountings
Write for data and prices
PACENT ELECTRIC CO., INC.
91 Seventh Ave., New York



\$4
Mesco Buzzer
 set key and
 buzzer, **1.95**

No. 12 Enameled copper wire,
 any length, ft.\$.01

No. 10 Enameled copper wire,
 any length, ft.01½


Genuine Bakelite Panel
 10x14½1.50

Teco—50 Watt Socket1.45

Myers \$5 4½ volt Det. or
 Amp tube, complete with
 mounting clips95

Belden braid ¼ inch wide, ft. .06

Neon tube, type B, ultra
 sensitive. Has sealed in
 electrodes, positive contacts.
 Best indicator for wave-
 meter 1.50



Bradley Leak, absolutely noise-
less and stepless, 2.95
 2000 to 30,000 ohm re-
 sistance. List \$5,
 special.

LEEDS

The Home of RADIO
45 VESEY STREET
NEW YORK

**New York's Headquarters for
 Transmitting Apparatus**


Full Line of Acme -- Thordarson -- Jewell -- Flech-
theim -- General Radio -- Signal -- Bradley

SPECIALS

- Faradon U.C. 1803 Condenser cap. .00025-10,000 volts \$.45
- Dubilier Mica Condenser .002 cap. 4,000 working volt. 1.95
- Dubilier 4 mfd. filter cond. tested at 1500V. DC. working voltage 500 1.75
- General Radio 247D .001 cond. plain or with vernier 1.75
- General Radio 247N variable cond. .00035 1.95
- Dubilier cond. 1.7 mfd 1,000V D.C. working voltage 1.35
- Dubilier cond. 5 mfd. 1,000V D.C. working voltage 1.85
- R.C.A.—U.V. 1716 Super Het. transformer 1.45
- R.C.A.—U.V. 1714 R-F 1.45
- Dongan \$6 type B trans. for McCullough A C tubes, tapped for 1½-2½-3-3½ volts 2.95
- Deforest audio transformer, built for 400 v. \$10 Hst 3.45
- Dubilier Invarion R. F. transformer 2.95
- Bristol 30 Henry Choke 15m at 500-1000-1500V. 2.45
- Lavite Resistance 1,000 to 150,000 ohms, all sizes .69
- Ward Leonard Resistances; its standard base receptacles; sizes 300—600—900—1200 and 2000 ohms .95
- \$15 Imported German head sets; very sensitive 3.45
- Honeycomb Colls. unmounted, all sizes in stock at ½ price. 2.45
- \$8 DeVeau adjustable arm micro-transmitter for panel mounting 2.45
- Heath amplifier double spaced for transmitting .00025 cap 2.45
- Dubilier buffer condenser .1 or .5 mfd. 400 v. D.C. each .50

MAIL ORDERS FILLED SAME DAY

10% Must Accompany All Orders




Cardwell con-
densers, double 3.45
 spaced for trans-
 mitting, .00025 cap.

- Electrad Wire Fixed Re-
 sistance, type B, 25 watts, 2" long
 5,000 ohm, centre tapped \$.95
- 10,000 ohm, centre tapped 1.10
- Type C, 50 watts, 4" long
 5,000 ohm, centre tapped 1.45
- 10,000 ohm, centre tapped 1.75
- Type D, 75 watts
 20,000 ohm, centre tapped 2.25



Flechtheim Condensers
 all types 35% off list

CRYSTAL VALVE



a unilateral rectifier of
 definite value and un-
 changeable characteris-
 tics, recommended as a

GRID CONTROL

Write for circular.
POSTPAID \$1.50

**CRYSTAL
 VALVE
 COMPANY**
 Manufacturers

**533 So. Wabash Ave.
 Chicago, Ill.**

RADIO THEORY AND OPERATING

3rd Edition, Revised—886 Pages—700 Illustrations—Price \$3.50
 By Mary Texanna Loomis

President Loomis Radio College; Member Institute of
 Radio Engineers.

America's standard radio book. Used by Dept. of Commerce,
 U. S. Radio Schools, practically all Radio Schools throughout
 U. S. and Canada, Universities, Colleges and High Schools.
 Buy of your bookstore or order direct. Postage paid.

LOOMIS PUBLISHING CO.
 Dept. T-405 9th St., Washington, D. C.

Four Kellogg Broadcast Microphones,
 all Guaranteed First Class Condition.

\$50.00 each. Terms: \$5.00 with order
 balance C. O. D. unless rated.

Howell Broadcasting Co.,
 Buffalo, N. Y. **WEBR**

AMATEURS

The Most Interesting Field
 for Experimenters.

Light Sensitive Cells

...AND...

Their Applications

PHOTO ELECTRIC CELLS

have been used in Television, Telepho-
 tography, Talking Movies and innume-
 rable uses with:—

RADIO RELAYS

Our special polarized relay, a result of
 long research for a practical relay to be
 used with—Light Sensitive Cells—also
 used in connection with telegraph-print-
 ers, receiving time-signals and many ap-
 plications in radio.

Write for further information:—

Photo Electric Devices, Inc.,
 594 Fifth Avenue **Brooklyn, N. Y.**



A BARGAIN AT 1/2 USUAL PRICE
**GENUINE AMRAD MERSHON
 ELECTRIC CONDENSERS**

MANUFACTURED UNDER PATENTS OF RALPH D. MERSHON
 BY AMRAD RADIO CORPORATION

—TYPE S-60, GLASS JAR—60 MFD—200 VOLTS—

The Amrad Mershon Electric Condenser is a thoroughly tested product. It has been used extensively during the past six years by expert radio amateurs for filtering plate supply in their transmitting equipment which is a very severe requirement.

USES:

Connection to any "B" eliminator for improving tone quality, prevents "thumping" or "motorboating." Basic unit of capacity in building a super "B" eliminator. For constructing an "A" and "B" power unit. For "smoothing" plate supply current for amateur transmitters. Greatly prolongs useful life of ordinary dry cell "B" battery. Protects receiving sets from punctured parts or insulation breakdowns when using "B" eliminators. May be connected in series, to withstand higher voltages at lower capacity, or in parallel, for larger capacity. Eliminates A.C. "hum". Acts as a reservoir to store energy. Takes the "ripple" out of a D.C. motor-generator.

Booklet giving diagrams and full instructions packed with each condenser

GORDON R. BADGER, INC.
 40 COURT STREET, BOSTON, MASS.

\$4.00 EACH POSTPAID
 LIST \$8.00.

LIMITED SUPPLY

Orders Shipped Same Day
 Cash With Order

REFERENCE: Industrial Bank
 and Trust Co.

A. R. R. L. Members -- What about your friends?

You must have a friend or two who ought to be members of our A.R.R.L., but aren't. Will you give us their names, so that we may write to them and tell them about the League and bring them in with the rest of us? The A.R.R.L. needs every eligible radio enthusiast within its ranks, and you will be doing your part to help bring this about by recommending some friends to us. Many thanks.

American Radio Relay League,1928
 Hartford, Conn.

I wish to propose


Mr.of

Mr.of
 Street & No. Place State

for membership in the A.R.R.L. I believe they would make good members. Please tell them the story.

.....

**DEPENDABLE! EVERLASTING!
"B" BATTERY POWER**

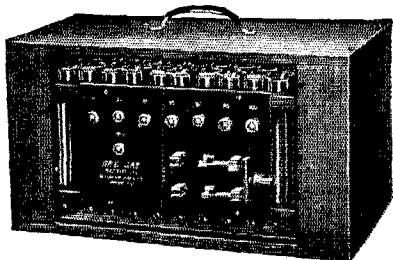

100 VOLT EDISON ELEMENT, NON-DESTRUCTIVE RECHARGEABLE "B" BATTERY WITH CHARGER
 Shipped dry with solution\$12.00
 140 VOLT WITH CHARGER\$17.00
 100 Volt POWER UNIT with TUBE\$16.00
 Free Sample Cell. See how it operates. A Sample of Perfection. Complete knockdown batteries all sizes at **REDUCED PRICES.**
 180 Volt UNITS built to your specifications. **SEND NO MONEY—PAY EXPRESSMAN**
 Write for *Free Illustrated 24 Page Booklet.*
SEE JAY BATTERY COMPANY
 915 BROOKS AVE. Dept. A, NEW YORK CITY

Master the Code

Wireless or Morse quickly at home with the

TELEPLEX



Code Instructor
 No better method for self-instruction exists. *Quick-Easy - Thorough.* Endorsed by U. S. Navy and leading Technical and Telegraph Schools. The only instrument that **REPRODUCES** actual sending of expert operators. Sends messages, radiograms, etc. Any speed.

Silent Phonograph Motor
 Complete course (6 tapes) **FREE.** 30 times as many words as any other instrument. Tapes cannot be memorized. Last indefinitely. Avail yourself of the TELEPLEX for a quick mastery of the code. Write for booklet RL.
TELEPLEX CO., 76 Cortlandt St., New York

To Our Readers Who Are Not A. R. R. L. Members

Wouldn't you like to become a member of the American Radio Relay League? We need you in this big organization of radio amateurs, the only amateur association that does things. From your reading of *QST* you have gained a knowledge of the nature of the League and what it does, and you have read its purposes as set forth on page 6 of every issue. We would like to have you become a full-fledged member and add your strength to ours in the things we are undertaking for Amateur Radio, and incidentally you will have the membership edition of *QST* delivered at your door each month. A convenient application form is printed below—clip it out and mail it today.

.....1928
 American Radio Relay League,
 Hartford, Conn., U. S. A.

Being genuinely interested in Amateur Radio, I hereby apply for membership in the American Radio Relay League, and enclose \$2.50 (\$3 in foreign countries) in payment of one year's dues. This entitles me to receive *QST* for the same period. Please begin my subscription with the issue. Mail my Certificate of Membership and send *QST* to the following name and address.

.....

Station call, if any


Grade Operator's license, if any

Radio Clubs of which a member

Do you know a friend who is also interested in Amateur Radio, whose name you might give us so we may send him a sample copy of *QST*?.....

..... Thanks!

2
Knobs
—
Rough
Tuning
and
Vernier



Markings
Are
Gold
Inlay
—
Look
for the
Gold
Band

KARAS MICRO-METRIC

the ONLY PRACTICAL


DIALS

for Short Wave Receivers

ATTACH a pair today and note the difference; instantly applied—requires no drilling, only one set screw! Smooth, even tuning—free from backlash—is what you must have for successful operation of your short wave receiver! And that is what you get from the handsome, Genuine Bakelite precision built KARAS MICROMETRIC vernier dials! Makes it easy to determine exact spot on the dial at which a station comes in. Tune to 1/1000th of an inch; 63 to 1 vernier ratio; large knobs \$3.50 each which never tire your hands. List Price

—and

KARAS CONDENSERS



KARAS Orthometric Variable Condensers ideal for low-power short-wave transmitters. Built of the finest under the strictest precision standards—and unequalled in their amazing performance. Greater separation—broader tuning range.

LIST PRICE
.0001 .00014 .00025 \$6.50 each

If you are not located within shopping distance of a dealer stocking Karas radio parts, remember that we will deliver, postpaid, anywhere in the U. S. —any of our radio parts.

KARAS ELECTRIC COMPANY
4030C—N. Rockwell St. CHICAGO

5ZAV, Le Roy Moffett, Jr., 223 East Fourth St., Oklahoma City, Okla.

ef-8ep ef-8fd ef-8lx ef-8jf ef-8vvd en-0ja ep-lae
fc-2xr fq-pm fm-8ma fm-8st ne-laa ne-lap ne-lco
nc-2be nd-hik nm-9a nm-9b nn-1nic nn-2nic nq-2ac
nq-2ef nq-2jt nq-5ev nq-6nin nq-8ry nq-7ex nr-cto
nr-2ea nr-2fg oa-1rx oa-2dy oa-2ij oa-2rb oa-2rx
oa-2xi oa-2yi oa-2yj oa-3es oa-3is oa-3pm oa-3vp
oa-3xk oa-4cg oa-4hn oa-5ax oa-5bg oa-5dx oa-5hg
oa-7bq oa-7cw oa-7li oi-btta oo-enlf oo-bam oh-6dpp
oh-6dr oz-lao oz-lfe oz-lfs oz-2ae oz-2ay oz-2bg
oz-2ga oz-3ai oz-3ar oz-3au oz-4am sa-ch4 sa-da8
sa-laa sb-lac sb-lah sb-lak sb-lar sb-law sb-lbr
sb-lcg sb-lib sb-lie sb-lig sb-2aj sb-2ak sb-2ar
sb-2ax sb-2ay sb-2bg sb-2xi sc-2ar sc-2bl sc-3ag
se-lfg su-lcd su-2ak sv-lxc aqe arex ardi de-dra
doj efzq famp oie oik wnp xen-0qq wye 0sq xnu-ixl
x-sk xem-sfv.

SAXA, C. B. Hoag, 123 E. Matson Ave., Syracuse, N. Y.

eb-4au eb-4cb eb-4tm ed-7ez ee-ear10 ef-8ba ef-8btr
ef-8ep ef-8ef ef-8fd ef-8px ef-8ty eg-2ao eg-2bm
eg-dn eg-2nh eg-2od eg-2am eg-2vq eg-5by eg-5hs eg-5ku
eg-5ls eg-5ma eg-5ml eg-5ms eg-5yk eg-5yx eg-6fz eg-6jv
eg-6rb eg-6za eg-6wl ei-lbs ek-4ap eo-lgw eo-1ld
eo-17c ep-laa ep-lai nb-be3 ni-lag nn-1nic nn-2nic
nq-2jt nq-5ry nq-7cx nr-2ea nr-2fg nx-1xl sb-lad
sb-lah sb-lal sb-lcg sb-lct sb-2aj sb-2ax sb-2id
sb-2ig sb-5aa sc-2bo oa-2sh oa-3jk oa-5bg oa-5cm
oa-5mb oz-3ai pot.

8CDB, Bob Wood, 860 Maryland Ave., Syracuse, N. Y.

6aat 6ann 6abk 6am 6aqw 6akw 6app 6atu 6adm
6bq 6hec 6ha3 6bjl 6bjk 6bsn 6bjh 6bxr 6czm
6cmq 6dib 6ahm 6dog 6dhh 6dfq 6dg 6fh 6rn 6zbe 7aat
7aka 7am 7agh 7akq 7ach 7acm 7ab 7fe 7fi 7il
7iv 7if 7if 7il 7it 7iw 7mo 7ob 7vf 7vz eg-2bm
eg-5by eg-5hs eg-5ma eg-5ml eg-5wq eg-5yk eg-5yx
eg-5rb eg-6rb eg-6vp gi-2it gi-6mu kc-5yx kc-5gz
eb-4au eb-4cb eb-pl ef-8aqm ef-8btr ef-8btx ef-8eo
ef-8est ef-8fx ef-8orm ef-8toy ep-lai ep-lap xep-lma
ei-lxl ek-4ap eu-lauf oa-3es oa-5dx oa-5mb oa-5wh
oa-5wg oz-4am aj-4zz aq-1mdz aq-1lm fo-a3m fo-a3v
fo-a3z fo-a4b fo-a4x fo-a9a fq-pm fm-8mb sb-lab
sb-lah sb-law sb-lca sb-2aj sb-2ib sb-2ig su-2ak
nb-3e ni-gren nn-1nic nm-8a nm-9a ne-5ef nx-1xl
rjc j2 nr-2fg nq-2ef nq-7cx.

8CRG, L. Solak, 1072 Milan Ave., Amherst, Ohio (20 meters)

1cmf 1afl 1bbm 1byv 1asf 1afl 1bge 5akp 5auw
6dev ne-4fv ne-4gg. (30-50 meters)

6xi 6bvm 6cdw 6aat 6bau 6wr 6ac 6atu 6biu 6czk
6ns 6bzf 6bh 6buq 6brr 6bgi 6dgu 6ec 6dom
6arw 6bco 6dog 6bq 6bhv 7bb 7fe 7aiv 7gt 7vj 7acj
7mx ne-4ha ne-4hh ne-4fh ne-4op ne-4ek ne-5cj
sb-lak sb-lah sb-lax sb-lbg sb-law sb-lao sb-lcg
sb-lcm sb-laq sb-2ar sb-2l sb-2ig sb-7aa sc-2as sh-8lb
nr-2fg nn-1nic ny-lxc nm-1n nm-xc6i nm-xc65 nq-2jt
nq-2la nq-5ry nq-6by nq-2ua nq-8v ny-8dg ne-8ae
ne-8fd ep-laa ef-8orm ef-8ct ef-8oqp ef-8dmf ef-8fd
ef-8vvd ef-8bc eb-4oi eb-4u ei-lfp ee-ear48 eg-2nh
oa-2dy oa-4nw oa-3cp.

8JQ, 2711 Espy Avenue, Dormont, Pittsburgh, Penn.

sa-aal sa-da8 sa-da9 sa-en8 sa-fc6 sa-fh4 oa-2dy
oa-2hm oa-2jw oa-2rb oa-2ro oa-2rt oa-2rx oa-2sh
oa-2tm oa-2xi oa-2yi oa-3al oa-3bq oa-3es oa-3ks
oa-3jo oa-3ot oa-3wm oa-3xo oa-4ae oa-4bd oa-5bg
oa-5bw oa-5da oa-5hg oa-5wh oa-7ch oa-7cw oa-7lj
vis. eu-cm ea-cr eu-gp ea-spo eb-4ac eb-4au eb-4bc
eb-4cb eb-4ec eb-4co eb-4ww eb-4zz eb-pl sb-laa
sb-lac sb-lad sb-lah sb-laj sb-lal sb-lao sb-lap
sb-laq sb-lar sb-lau sb-law sb-lax sb-lbg sb-lbl sb-lbr
sb-lca sb-lcd sb-lcg sb-lcl sb-lco sb-2ab sb-2ag
sb-2aj sb-2ak sb-2al sb-2ar sb-2au sb-2ax sb-2az
sb-2bf sb-2ie sb-2ig sb-2ia sb-2ib sb-5aa sb-6aa sb-6qa
sb-7aa sb-7ah fq-pm sc-2ar sc-2as sc-3ag r-2ea nr-2fg
nr-2gpb nr-cto nq-2ac nq-2cf nq-2it nq-2la nq-2la
nq-6nin nq-8ry nq-7ex nq-8en nq-8xp ed-7fr nd-hik
se-lfg fe-2ro ef-8ba ef-8ep ef-8ef ef-8ef ef-8xo
ef-8er ef-8fd ef-8fr ef-8ix ef-8jf ef-8jz ef-8kx
ef-8btr ef-8dmf ef-8est ef-8dgb ef-8oqp ef-8orm
ef-8vvd ef-8ycc ek-4ap ek-4da ek-4uf ek-4yo ek-aeq
eg-2bm eg-2dn eg-2it eg-2s. eg-5by eg-5jw eg-5ls
eg-5ma eg-5ml eg-5mq eg-5ms eg-5oc eg-5wq eg-5yk
eg-5yx eg-6fz eg-6ia eg-6oh eg-6rb eg-6uh eg-6yq

PYREX Radio Insulators

T. M. Reg. U. S. Pat. Off.

Prevent Leakage and Eddy Losses

RADIO energy in all its original volume is delivered by antennae equipped with *PYREX Insulators.

Signals from even the most distant stations reach the detector unweakened by leakage or eddy losses.

The special glass from which PYREX Radio Insulators are made has the lowest power loss of any known substance suitable for antenna insulation, with the exception of fused quartz. The smooth hard surface prevents accumulation of dirt and soot.

Specified wherever perfect insulation is of vital importance—in the U. S.

Navy, Coast Guard, Lighthouse and Air Mail—and in the country's largest broadcasting stations.

Write for "PYREX Industrial Glass Products"—a complete treatise on the properties, characteristics and unique applications of special glass products made by Corning Glass Works.

Electrical Properties:



Phase Angle Difference— 0.16° (30,000 cycles); Volume Resistivity—greater than 10^{14} ohm-c.c.; Dielectric Constant—4.48 (30,000 cycles); Surface Resistivity— 10^{14} ohms (34% humidity)

CORNING GLASS WORKS

Industrial and Equipment Division

CORNING, NEW YORK

*Trade-mark Reg. U. S. Pat. Off.

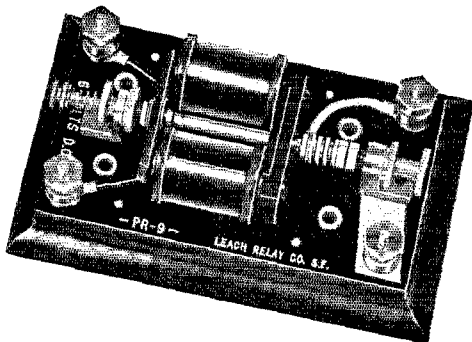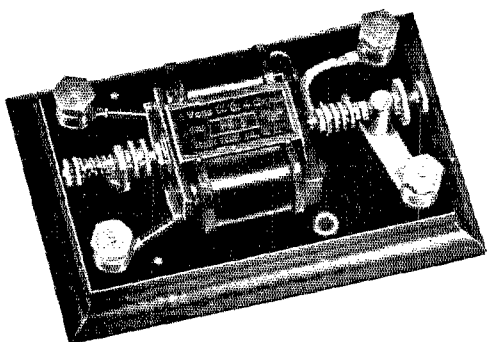

NEW RELAYS for your Transmitter

PR-5

Operates on 6 volts D.C. adjustable to all positions. $\frac{1}{4}$ " pure silver contacts. Lacquered brass finish. $3 \times 5\frac{1}{4}$ " x $\frac{1}{4}$ " Bakelite base. Maple sub-base. Recommended for 250 watts or less.

PRICE \$9.00

PR-9

Operates on 6 volts D.C. Adjustable to all positions. $\frac{3}{8}$ " pure silver contacts. Highly polished nickel finish. Engraved Bakelite base. Maple sub-base. Recommended for 250 watts or over.

PRICE \$12.00

**THESE RELAYS ARE EXTREMELY FAST. THEY DO NOT LAG NOR DRAG.
MADE BY MAKERS OF THE FAMOUS "LEACH BREAK-IN RELAY"**

LEACH RELAY COMPANY

693 MISSION STREET

SAN FRANCISCO, CALIFORNIA

TRANSMITTING TUBES

We rebuild them and guarantee them. We also guarantee that they will arrive to you from our Factory without damage. Special crates are the solution of the Problem.

We Build a 50-Watt Tube

Type 203, using a Tungsten filament at 10 Volts and normal plate current of 150 Mils at 1500 Volts on the plate. It is low priced at \$20.00.

We Make Rectobulbs

a hi-voltage Rectifier Tube—handles power up to 250-watt tubes—a small investment gives you a carefree plate supply—the note from the Rectobulb Rectifier is distinctive and pleasing and gets results—they handle 250 Mils at 3000 volts and have a UX base with plate Terminal on top end.

Also low priced at \$15.00 each (includes fuses)

We Produce Inductrons

a short wave coil—sealed in a Vacuum and with a UX base for plug in—simple, durable and efficient for your receiver: coil for each band at \$2.50 each.

WE REPAIR UV-203. at \$15
UV-204 at \$50

UV-203A (Tungsten Fil) \$19
UV-204A (Tungsten Fil) \$50

Water cooled Tubes and Rectifiers: ask for prices. All work Guaranteed against defects. No charge for Crates when cash accompanies order.

NATIONAL RADIO TUBE CO.
(6EX) 3420 18th St. San Francisco, Cal.
(A ham institution)

eq-6yv ng-uf gw-17c ci-1ay ei-1dm ei-1er ni-gren
fl-1ab ep-lag ep-1ai ep-3am ep-3fz ep-3gb nm-1g
nm-1j nm-9a nm-9b nm-xc11 fm-8ev fm-8est fm-8parv
en-oga en-oja oz-1ao oz-1ap oz-1fb oz-1fe oz-2ac oz-2ae
oz-2ay oz-2bp oz-2bu oz-2ga oz-2go oz-2rb oz-2xa
oz-3ai oz-3aj oz-3ap oz-3ar oz-3au oz-3au oz-4am
oz-4ar nn-1nic ns-3jg fo-a3c fo-a3v fo-a3z fo-a4x
fo-a8p ee-ear65 oo-bam su-2ak sv-1xc.

SBCA, 308 7th St., Fort Madison, Ia.

nq-2jt nq-2ro nq-5ev nq-5nin nq-5ry nq-7cx nn-1nic
nm-1g nm-1j nm-1r nm-9a nm-9b nr-2fg nr-2ea
nr-cto oo-bam oo-geo fq-pm oa-2re oa-3ew oa-3ik
oa-3kw oa-5mb oa-5hg oz-1ao oz-2ab oz-2ay
oz-2ga oz-2me oz-3am oz-3ai oz-3aj oz-3au oz-3ap
oh-6dqq sb-1ah sb-1bc sb-1ao sb-1br sb-1ca sb-1bv
sb-1aw sb-1aw sb-1ak sb-1ac sb-1bg sb-2ak sb-2aj
sb-2ay sb-2ag sb-2ig sb-2ih sb-2ax sa-hg9 sa-dw4
sc-2bl tqw.

9ECZ. H. E. Niece, Niota, Illinois

ef-8xo ep-8ep nq-2ac nq-2ef nq-5by nq-5ry nr-2fg
oa-2dy oa-2hm oa-2ij oa-2ms oa-2nj oa-2rb oa-2re
oa-2rt oa-2rx oa-2sh oa-2ss oa-2ui oa-2xi oa-2yi oa-3ar
oa-3es oa-3jk oa-3jo oa-3kw oa-3ro oa-3vr oa-3wg
oa-3wm oa-4aa oa-4bd oa-4cg oa-4cm oa-4go oa-4nm
oa-5bg oa-5em oa-5da oa-5hg oa-5mb oa-5mx oa-5wh
oa-5ws oa-5xg oa-6mu oa-7bq oa-7ch oa-7cw oo-bam
oz-1aa oz-1aj oz-1ao oz-1ap oz-1fe oz-1fq oz-2ae
oz-2at oz-2bp oz-2go oz-2me oz-2xa oz-3ai oz-3ap
oz-3au oz-4ac oz-4ae oz-4am oz-4re sa-cb8 sb-1ea
sb-1ib sb-6qa arcx.


Arnold King, Jr., 7300 Champlain Ave., Chicago, Ill.
(40 meters)

ni-5aa nm-9a nm-ogy nn-1nic nd-hik nq-5ry nq-5ev
nq-7cx nq-2ef nq-2ro nq-2jt nq-2ja nr-1ur nr-2fg
nr-2ea nq-2ac nx-1xl ef-8ix ei-1no ei-1er ep-3ag
ep-3fz ek-aeq es-1co fq-pm fl-1ab sa-cb8 sa-da9 sb-1ao
sb-1ak sb-1aw sb-1ah sb-2al sb-7ab sb-1bc sb-1ic
sb-1ca sb-1ib sb-2ay sb-1bg sb-2aj sb-2ag sb-2ig sb-1cl
sb-1al sb-1ax sb-1ar sb-2ax sb-8qax sc-2bl sc-2as
xoa-5ma oa-6mu oa-2rx oa-2dy oa-4cg oa-2rb oa-5hg
oa-5wh oa-7ch oz-2go.

9BCF, Elmer A. Gunther, 514 11th Ave. So.,
Ft. Dodge, Iowa

sb-1ag sb-1ah sb-1ak sb-1ar sb-1aw sb-1be sb-1ca
sb-1eg sb-1ib sb-2af sb-2ak sb-2aj sb-2ig sb-nnm
sc-2ab sc-2ar sc-2as sc-2aq sc-2bi se-1fg su-2ak
xen-0sq nm-1a nm-1a nm-1g nm-1ia nm-1n
nm-1j nm-2rx nm-2cc nm-9a nz-ez5 nq-2ac nq-2cf
nq-2jt nq-2rm nq-5ev nq-5ry nq-7cx nq-8kp nq-3yp
nq-4sa nj-2pz nj-2yp nj-1fq nj-4x ni-5aa
nn-1nic nn-m3y nr-2fg nr-2rg nr-cto nr-oik ff-ij
oh-6al oz-2ae oz-2ae oz-1oa oo-mba oa-2ec oa-2hm
oa-2mc oa-2mh oz-2no oa-2sd oa-2sb oa-2ax oa-2rx
oa-2yi oa-3ai oa-3bc oa-3yp oa-3my oa-6ax oa-5bc
oa-5ch oa-7hv xe51 xsa-bva wge wxw wvw wnp wnt
wuby know nite kivr vde ardi ug ks voq.

A Laboratory Product



**CRESCENT
LAVIE
RESISTANCES**

for Distortionless Amplification

12,000, 49,000, 50,000, 100,000 Ohms, List \$1.50
each, Special Sizes to Order, \$2.50 each. Deal-
ers write for discounts. When Better Resistances
are made they will be Crescents.
Crescent Radio Corp., 160-32 Jamaica Ave., Jamaica, N. Y.

500 Cycle Motor-Generators

Crocker & Wheeler • 120 volt d.c. drive, new motor-
Generators, output $\frac{1}{2}$ K. W., 500 cycles at 250
volts with $\frac{1}{2}$ voltage tap. $\frac{1}{2}$ K. W. self-excited
2500 speed generators, gas engine drive. 2 K. W.
with steam turbine drive. 1 K. W. up to 5 K. W.
output, 500 cycle, d. c. drive.

R. WOOD, 102 St., Corona, N. Y.

HAM-ADS

NOTICE

The "Ham Ad" Department is conducted strictly as a service to the members of the American Radio Relay League, and advertisements will be accepted under the following conditions.

(1) "Ham Ad" advertising will be accepted only from members of the American Radio Relay League.

(2) The signature of the advertisement must be the name of the individual member or his officially assigned call.

(3) Only one advertisement from an individual can be accepted for any issue of QST, and the advertisement must not exceed 100 words.

(4) Advertising shall be of a nature of interest to radio amateurs or experimenters in their pursuit of the art.

(5) No display of any character will be accepted, nor can any typographical arrangement, such as all or part capital letters, be used which would tend to make one advertisement stand out from the others.

(6) The "Ham Ad" rate is 7c per word. Remittance for full amount must accompany copy.

(7) Closing date: the 25th of second month preceding publication date.

THE life blood of your set—plate power. Powerful permanent, infinitely superior to dry cells, lead-acid, Bs, B eliminators, Trouble-free, rugged, abuse proof, that's an Edison Steel-Alkaline Storage, B-battery. Upset electrically welded pure nickel connectors insure absolute quiet. Lithium-Potassium solution (that's no lye). Complete, knock-down kits, parts, chargers. Glass tubes, shock-proof jars, peppy elements, pure nickel, anything you need. No. 12 solid copper enameled permanently perfect aerial wire \$1.00, 100 ft. Silicon steel laminations for that transformer 15c lb. Details, full price list, Frank Murphy, Radio 8ML, 4837 Rockwood Rd., Cleveland, Ohio.

HAWLEY Edison element battery and parts standard for over five years. Look at our patent pending connector—no thin wire to drop off—contains 20 times more metal than regularly used. Heavy shock proof cells, fibre holders, etc. Everything for a rapid-fire "B" supply. Complete assembled 100 volt "B" \$10.00. Knock-down kits at still lower prices. Chargers that will charge in series up to 160 volts \$2.75 to \$4.00. Trickle B Charger for 90 to 150 volt "B" \$3.75. Special transmitter "B" batteries up to 6,000 milli-amp capacity, any voltage. Write for interesting literature, testimonials, etc. B. Hawley Smith, 360 Washington Ave., Danbury, Conn.

JEFFRIES plate transformer, 1000 watts, 550-825-1100-1500-2200 each side, \$19.00. 1000 watts 2500-3000 each side \$22.50. Folder on request. 125 watt filament transformer 9-12 volts, \$6.25. Carl Schwenden, 7427 Alameda Blvd., Los Angeles, Calif.

LOUDSPEAKER units rewound and magnets recharged, \$3.00. 24 hr. service. Henry Wagner, East Chicago, Indiana.

OMNIGRAPHS, Teleplexes, transmitters, receivers, chokes, meters, transformers, 50 watters, S tubes, motor generators, portable loop receivers, Vibroplexes bought, sold and exchanged. L. J. Ryan, Hannibal, Mo. 9CNS.

FIVE by twenty-six panels. Excellent for transmitter panels, etc. Seventy-five cents, postpaid. Money orders only. Maynard J. Columbe, 8UY, Plattsburg, N. Y.

NAVY standard transmitters and parts. Half kilowatt motor generators, forty dollars, two kilowatt hundred dollars. Dublier .004 condensers, eighteen dollars. SE1012 receivers thirty dollars. What do you want? Paul Trautwein, 17 Albany St., New York City.

SALE—Thordarson B and power amplifier, 2--100-volt Edison Bs. Trf. kit. Short-wave kit. Gr. audio transformers. Speaker unit, complete speaker, miscellaneous transformers, coils, condensers, rheostats, resistors. All less than half price. Write for list. R. R. Milligan, Eldorado, Ill.

SALE—New CR18—set of coils, \$50.00. Check or money order. 8CWt, Quentin D. Bellas, 4th & Armstrong, Apollo, Penn.

THE New Kennedy 15 watt tube oscillates at 5 meters. Ideal for crystal stage. Postpaid, \$6.50. Satisfaction guaranteed or refund. Also sell UV204A used 300 hours but guaranteed O.K. \$45.00. Sink motor only \$15.00. 6 UX-210s, each \$5.00. W. K. McCulla, Waukegan, Ill.

500 QSL cards, per your copy, one color, plain stock, \$2.70; two colors, \$4.20, postpaid. If you need cards write for other prices and samples. 8CUX, Millington, Mich.

FOR SALE—Brand new Teleplex with six tapes. Also short wave receiver with one step, built of standard parts, such as Hammarlund, Aero, AmerTran, Carter, etc. What am I offered? S. Landes, 676 Riverside Drive, New York City.

SELL CHEAP—Transmitter and receiver. Complete or parts. Send for dope. M. Cox, 46 Mass. Ave., Cambridge, Mass.

FOR SALE — Ten-watt transmitter, panel mounting, complete with tubes, meters, and transformer \$50.00. Ham receiver, 20-40-80 meters, complete with tubes \$25.00. Wavemeter, 20-40-80 meters \$5.00. Wavemeter 130-230 meters \$4.00. Lot of spare parts. What do you need OM? 8JW, 6923 McPherson Blvd., Pittsburgh, Pa.

WAVEMETER—General Radio Company 174-B 0-3000 meters, in walnut case, complete with battery, buzzer, hairline condenser, galvanometer and detector. First \$20.00 to get it prepaid. Write for Lists of other materials. M. Leitch, South Park Drive, West Orange, N. J.

MERCURY arc rectifier tube General Electric full wave, \$15. Fone transmitter with arm, \$1.50. Weston Electric 1000 v. cond., 4 1/2" x 1 1/2" x 1 1/2", \$1.00. Automatic Elec. Co. Cond. tested at 800v. D.C. 2 M.F., 40c. 1 M.F. 35c. 1/2 M.F. 30c. Western Elec. fone cords 35c ea. 4 for \$1. 1000 ohm resistance spools, 15c, 12000 ohm Lavite resistance, 85c; 48000 ohms, \$1. Real test cords 12 ft. long 3 wire, with clips, \$1. Orders \$2.50 up prepaid. B. B. Sadt, 3114 Euclid Ave., Berwyn, Ill.

HELLO HAMS—Here is Ben with some real Ben's buys. Hoyt panel peep hole 0-5; 0-8; 0-3; with volt 0-8 amp; these work on AC and DC and they are wonderful values at \$1.50. Also a few Hoyt 2" panel 0-8 volt at \$1.00 with push button, Neon bulbs and sockets \$1.75. R.C.A. OTs at a special \$7.75. Skinderviken transmitter buttons at 95c small but of a thousand uses. Lightning aerial switches, SPDT, 50c. Ward Leonard transmitting tapped 5000 ohm grid leaks 50 watt size \$2.75, 20 watt \$1.95. Telegraph keys Navy type 75c, special now. Cootie keys. They are here now at Ben's, \$5.75 and worth it. Antenna rings 50c. 600 volt 2mf, \$1.00, 600 volt 1/4 mfd 50c. Thousands of bargains always at Ben's, so don't hesitate to write even if for a small order, as Ben is always glad to hear from all his friends. Ben Wolf, 223 Tremont St., Boston, Mass.

SELL—REL 7 1/2 watt transmitter parts, complete \$20; REL 12 1/2-200 meter receiver \$25; Teleplex with Federal buzzer, key and tapes, \$22.50. All like new. Wm. Uzzell, 85-12 165th Street, Jamaica, N. Y.

CUNNINGHAM CX810s \$6.00. Tunzar 5 amp. A and B chargers with bulbs \$16.00. GE 500 volt, 100 watt generators, list price \$28.50, special at \$12.75. Above items all new. 8DN, Sylvania, Ohio.

SWAP—250 volt motor-generator, (110 volt AC motor) for slightly used UX210. Romney Wheeler, 34 Crescent Ave., Huntington, N. Y.

8ARZ Niedermeyer reports: "For two years had tried diligently to qualify for license but could copy only 8 per. Using Radio Shortcut mastered code your way in two evenings, and in spare time of one week qualified. Further practice, odd times, few weeks, raised receiving speed to present standing of 25 per." See display ad this magazine. C. K. Dodge, Mamaroneck, N. Y.

DYNAMOTOR 24-1500 wanted—will trade Corona portable typewriter even, or 15 plate Omnigraph and \$20.00 for same. Dr. E. H. Cunningham, 5LN, 101 Baylor St., San Antonio, Texas.

204As—New and used, guaranteed! Reasonable! 2US, Phone Montclair 2271R.

QSL cards, two colors, \$1.00 per 100. Govt. \$1.90. Samples, F. L. Young, Corwith, Iowa.

YOUR ARRL Emblem will look twice as snappy if you wear your call with it on a Radio Call Pin attached with a gold guard chain (fraternity chapter style). Radio Call Pin with gold chain for attaching, only three bucks! 9FZ, R. C. Ballard, 806 E. Green St., Champaign, Illinois.

No. 64 Jewell meters, 0-3 antenna meters, \$7.80, 0-25 milliammeters, \$5.00. No. 427-h General Radio 500 mmf Vernier condensers, \$1.50. American Beauty Soldering Irons, \$5.50. All new. Write for list. 9AQJ, W. Miller, 1810-9th St., Rockford, Ill.

SELL or trade. 450 volts Edison batteries. Want Tobe 5 mfd. condenser. Cardwell transmitting condenser. Meters or Vibroplex. 8CSS.

SELL fifteen G. E. transformers, 1100-2200 each side tap, carry 1000W continuously. Guaranteed absolutely. \$12.00. F. O. B. Detroit. F. G. Dawson, 5740 Woodrow Ave., Detroit, Mich.

FOR sale—Mueller 150 watt input tube, New \$12. Acme thirty Henry 300 mil choke \$10. Used battery chargers. Wanted: Weston or Jewell eliminator, voltmeter. Oliver Kirchner, 9BRL, Carthage, Ill.

7½ W. R.E.L. 40-80 m. Trans. Panel Set, wired D.C. Hartley with 7½ v. fl. Trans. built in. 2-7½ v. tubes. R.E.L. Type A wave meter: Everything new, used 4 hours. \$75 takes it. Write P. O. Box 925-Columbus, Ga.

WANTED: Acme 250 watt plate transformer; RCA 150 Milliampere. 30 henry choke: Two GE ET3619 transmitters; Jewell or Weston Thermocouple Ammeter 0-5 or 0-1.0; Jewell 0-300 milliammeter: sell or trade—RCA 75 watt filament transformer, RCA power rheostat for 50 watter, Send for list. James Boyer, Park Building, Pittsburgh, Penna.

BARGAINS: tubes, UV208A excellent, \$30.00; UX210 new \$5.00; UX216B new \$3.75; DeForest HR \$12.00 new; UV216 new \$1.00; condensers; General Radio .00025 double spaced special \$5.00; 1 mf 1000 volt Faradons, \$1.60; late type Mershons \$2.50; Jewell meters; 3 amp. thermo \$5.00; 1.5 amp thermo \$7.00; 500 milliamp \$4.50; Westons, 200, 100, 50 milliamps \$4.50; Radiocorp hot wire 1.5 amp, 5 amp, \$1.00; Rheostats; Bradley E2111, new \$4.00; Bradley 50,000 heavy resistor, new \$3.00; 5000 heavy grid leak. General Radio crystal 157.9 meter new, with holder, \$10.00 Pyrex insulator 12½ inch new, high power \$1.75. Frank Dixon, Knoxville, Iowa.

WHY not get that pure penetrating d.c. note? Here is what will help you get it. 50 Henry chokes rated to pass 200 milliamperes, \$2.95 each. Dubilier 4 mfd. 1500 flash test condensers, \$2.50. Western Electric 2 mfd. 600 volt \$1.00. Navy 5 watters, filament 7½ volts, plate 500, new and in original boxes, \$1.30. Following range milliameters 0-10, 0-25, 0-50, 0-100, 0-300, 0-400 accurately calibrated, flush mount only \$1.80. Large Neon tube \$1.50. Small, 75c. Hi-resistance 0-50, 0-300; D.C. voltmeters \$4.50. Money back guarantee. Sent C.O.D. on request. Send for free ham bargain catalog to E. P. Hufnagel, 879 So. 18th St., Newark, N. J.

HAMS: Get our samples and prices on printed call cards made to order as you want them. 9APY Hinds, 19 S. Wells St., Chicago, Ill.

SELL—Acme 500 watt and 200 watt transformers, Jewell 0-1; 5 t.e. amps., Weston 0-7½-150 D. C. voltmeter. 9AD, Plymouth, Ill.

QSL cards, two colors, government post cards \$1.90 per hundred, white cards \$1.00. Real ham stationery at \$1.40 per hundred sheets and envelopes, pad form. Postage 10c. Free samples. 8DTY, 257 Parker Ave., Buffalo, N. Y.

EDISON Element B. Batteries Prices Reduced 100 volts Complete \$9.50 Knocked down kits \$7.50, welded elements .03½ Pair, Potash Solution Battery \$4.0. Trickle Battery Chargers \$1.65, Rectifier Salts \$2.25, 201A Tubes \$1.00. 6 volt 100 amperes Batteries \$6.85. Motors ¼ Horsepower \$6.95. Hoffman, 224 North Fifth, Philadelphia, Pennsylvania.

CURTIS-Griffith 250-watt power-filament transformers 350-550 each side \$10.50. New Thordarson mounted transformers: 550-volts each side, 7½-volt windings for filament and rectifying tubes, each \$20.00; Thordarson 350-550 power transformers mounted \$16.00; 1000-1500 power transformers mounted \$22.00. Aluminum square foot 85c; Lead square foot 85c. Potter 2-mfd 1000-volt condensers \$2.75. New edition of the "Ham-List" 4c. James Radio Curtis, 5-A-Q-C, 1109 Eighth Avenue, Fort Worth, Texas.

HEADQUARTERS for Hams:—Mueller 150-watt input tubes \$15.00. UV202 5-watters \$3.15. Complete 5-watt transmitters—tube, transformer, rectifier, key, etc. 20-40 meters. each \$35.00. 20-40 meter receiver and one step \$17.50. Aerovox 1000-volt tested 1-mfd condensers \$1.75. Potter 2000-volt tested 1-mfd Condensers \$2.50; 2500-volt 1-mfd Condensers \$3.25. New "Ham-List" 4c. Robert Curtis, 1109 Eighth Avenue, Fort Worth, Texas.

POSTPAID. Dubilier 1½ mfd. Filter Condensers, 1000 volt D.C. working voltage, \$1.95. Stromberg-Carlson 3½ mfd. Filter Condensers, 600 volt D.C. working voltage, \$2.35. General Electric 5000 ohm Heavy Duty Grid-

leaks, \$1.25. Sangamo .002 mfd. By-Pass Condensers, 5000 volt test, \$1.75. General Radio Wavemeters, Type 358, \$19.25. Write for complete list. G. F. Hall, 535 West Horster St., Philadelphia, Pa.

QSL cards: 100 plain cards, 95c; 150, \$1.20; 150 Govt. cards, \$2.50. Radiogram blanks, one and two color stationary. H. M. Selden, Cranesville, Penn.

SELL: two tube amateur receivers, 14 to 220 meters, guaranteed, twelve dollars, postpaid in U.S.A. Swap miscellaneous for omnigraphs, crystals, meters, etc. 2ANE, 11 Courter Avenue, Maplewood, New Jersey.

WE are sole distributors for the National Radio Tube Co. Consult their ad in last QST and buy from us. Flechtheim filter condensers are unconditionally guaranteed. We offer them at 35% discount. R.C.A. UX-222 6.00, Westinghouse mercury arc 11.90, Westman R.F. amp. as in Dec. QST 13.75. Write us for any ham stuff and for our free literature. 9ARA, Butler, Mo.

SELLING OUT—DeForest H tube slightly used, \$10. UP1016 transformer, \$11. Short wave receiver \$15. Write for other bargains. Gulian Ellis, 2341 Andrews Ave., New York City.

SELL—Primary filament rheostat, sync motor, filament voltmeter, eighty meter crystal, crystal mounting, General Radio geared variables, Thordarson oil condenser, miniature oscillator, old QST issues. 8BTA.

SELL or trade—Tresco 175 to 200000 meter receiver. Want Corona typewriter. 8DSF, Harold Pike, Fairgrove, Michigan.

TRANSFORMERS—25, 40, 50, 60 and 500 Cycle Transformers for Plate and Filament supply or other purpose. Any size from 50 Watt to 5 Kilowatt built to order. Burnt out Transformers and filter chokes returned at one half the list price of a new one. Filter Chokes, any size from 10 Henry, 50 Milliamperes to 100 Henry, 1000 Milliamperes to order. Specials—10 feet ¼ inch Copper Strip 50c, 1000 turn Honeycomb Coils \$1.00 Postpaid anywhere in U. S. Nat G. Scott, New Albany, Mississippi.

WAVEMETER, General Radio, Type 358, 15-220 Meters \$15. Genuine G.R. Quartz Crystal 166.7 Meters \$10. Both for \$22. Never Used. E. Alden, 133 Broadway, Toledo, O.

SELL or trade—Robbins Meyers 500 volt 100 watt MG perfect \$30. 2-203A good \$20. Sink rectifier, motor perfect, disk fair, \$10. 8CED, Lansing, Michigan.

ARRL sweater emblems should be worn by all League members. They are yellow and black 5" x 8" diamond shape, felt letters and embroidered symbol, only \$1.00. Send money order or currency only. Eric Robinson, 135 Jefferson Road, Webster Groves, Missouri.

WANTED—Wireless Specialty receiver IP501 with or without loading coils. Allen J. Higson, River Edge, N. J.

BARGAINS:—Almost new Westinghouse M.G. set 1000 volt 250 watt 110 volt A.C. drive will sacrifice for \$85.00. Acme power transformer 550-750 slightly used \$16. Two UX281 half wave rectifiers almost new \$12.00. W.E. 284W microphone mounted in broadcast bronze case \$10.00. Two Hamerlund transmitting condensers .0001 \$16.00. One modulation transformer with split primary for double button mik. \$4.00. Two UX210's almost new \$10.00. J. C. Gill, 125 Gill Ave., Galion, Ohio.

PANEL meters—0-100 milliamperemeters \$1.00. 0-300 milliamperemeters \$1.25. Adjustable circle cutters to 8 inches 85c. Ed. Keers, 9CJR, 2300 E. Washington St., Joliet, Ill.

FOR sale—One Acme ¼ k.w. plate transformer, \$15.00. One Allen-Bradley radioleak, \$3.00. 50 watt socket, \$1.00. Accuratune dial and few RCA 5 watt gridleaks. 9COS, Rochester, Minn.

WANTED Marconi type 106 tuner—must be in good condition. C. M. Renfro, 738 E. Hill Ave., Valdosta, Ga. 4WB.

SELL—Acme 150 watt filament transformer, \$10.00, RCA UP1656 transformer, \$4.50, two Acme 1.5 Henry chokes, \$2.00 each, four UV216 Kenotrons, \$1.00 each, 50 watt socket, \$1.00. Shortwave receiver, \$25.00. Harold Campbell, 66 Vine St., Bridgeport, Conn.

FOR sale—shortwave receiver, 8 tube, \$27.00. Back issues QST. C. H. Henkel, Martinsburg, West Virginia.

QSB? \$8.00 1st Dudlo wound chokes. 50 henry, 150 milliampere, only \$2.95; Flechtheim filter condensers. 100v 2mf. \$2.60; 1000v. 4mf. \$4.60; 2000v. 2mf. \$4.25; 2000v 4mf. \$6.85; Corwicco enameled antenna wire, No. 12 \$9.00 100'. Myers tubes. Grid and plate leads at opposite ends, \$.95; Genuine RCA UX200 detectors, new in original boxes, \$.65; Pyrex sockets, \$.50; Mesco key and buzzer. learner's outfit \$1.95; UX-201A type tubes \$.95; CP aluminum, \$1.00; Genuine bakelite panels, 10" x 14" 1/4" thick \$1.50; Please include some for postage. Orders sent COD or P.P. Send card for our list of ham specials. D. L. Moon, 3344 Boulevard, Jersey City, N. J.

DO you know that there is no other piece of apparatus, that has as many uses around a ham shack, as a neon tube? They are also the best wavemeter indicator obtainable, within reach of a ham's pocketbook. Type "A" \$.85; Ultra sensitive type "B", cannot be burned out, \$1.50; Write for list of uses, Mastertone tubes, UX210 \$.50; UX281 \$4.00; Dubilier 4mf. 1500v. test condensers, \$2.60; Cardwell .00025 double spaced, \$3.45; Mahogany Radiola 20 cabinets, \$3.50; 15% discount on General Radio catalogue. Send card for our ham list. Orders sent COD if desired. Please add postage. G. L. Lang, 2ZWW, 2AWH, 1128 Springfield Ave., Irvington, N. J.

SEND for list of transmitting and receiving parts. I will sell or trade. What have you? Lowell Ecker, Sedan, Kansas.

MOTOR generator, 1500 volt Holtzer-Cabot, three hundred watt. Separately excited. Motors one hundred ten volts each. Priced sixty-five dollars complete with field rheostat. For immediate sale. Just been overhauled. R. B. Cooper, 326 Nicholas St., Vincennes, Indiana, 9DCG.

163.3 meter xtal, G.R. and oscillator, frequency doubler, assembled, twenty dollars. Zero to one and one half radio frequency ammeter, new, seven dollars. Grebe CR8 and ROKK, twenty dollars. DeForest H tube, new, ten dollars. G. E. mercury arc tube, new, seven dollars. Will trade. Faber, Earlville, Ill.

FEW new W. E. fifties at \$24.00. Three used W. E. superhet transformers, \$17.00 Levy, 2050-69th St., Brooklyn, N. Y.

BARGAINS. Navy receiver IP501, 250-7500 meters external 2 stage amplifier \$65. Grebe CR9 150-3000 meters, \$20. Old style S tube, \$.4. Arthur Wester, 50 Princeton St., Maplewood, N. J.

SALE—Complete phone CW transmitter with three Jewell meters. Also four 202 tubes. Very low price for immediate sale. Write for description and price. J. W. Moore, Radio 1HB, Ellsworth, Maine.

TRADE or sell eighty meter crystal. Herb Hollister, 930 Baltimore, Kansas City, Mo.

PROCRASTINATION—the thief of time; Buy now. Everything new and guaranteed. UX852's—\$32.00, 211D's \$25.00. Very efficient transmitting tubes: seven watters—\$4.00, ten watters—\$4.90, 38 Watters—\$8.00, 50 Watters—\$9.00, 125 Watters—\$30.00. Precisely calibrated Wavemeters, 17-160 Meters.—\$5.00. Power Chokes—30 Henry, 300 milliamperes—\$4.00. Accurate Milliameters: 0-25, 50, 100, 300, 400—\$2.00. Voltmeters: 0-8, 10, 50, 100—\$2.00. Rectifier elements, lead, aluminum, pair: 1" x 4"—7c, 1" x 6"—10c. Two color QSL cards—\$1.00 per 100. Free samples. Free Radio catalogue. William Green, 207 Cathedral Parkway, N. Y. C.

RCA 5 watters \$2.15. ReadRite 0-10 A. C. voltmeters, \$1.50, .00035 mfd. LoLoss \$3.50 condensers, 60c. Postage 15c. 3c for "Hamsheet" saves you 40%. Kenneth Hanifan, Waterville, Ohio.

FOR SALE—500 watt 500 cycle motor-generator, D. C. drive, including special transformer, also TC 0-5 ammeter. Sacrifice. 2APV, 1057 Grant Ave., New York City.

WE have a special bargain lot of amateur and other radio equipment. Send for list. Here's a sample: genuine RCA Uni-Rectrons, originally power amplifiers, but capable of supplying all power to 7 1/2 watt transmitter without changes. List price \$108.00, our price only \$39.50, complete with UX-210 and UX-216-B rectifier. Have you a "Ham Phone"? Here's the "mike" you've been waiting for—a genuine two-button broadcast microphone for only \$40.00, no need now to pay \$100 or more. Have you asked for a copy of the next "HamaMag", the original "Ham Catalog"? E. F. Johnson, 9ALD, Waseca, Minn.

WILL sell or trade, model E.T.3620, R. C. A. twenty watt, transmitter. Also other parts. Edmund Unger, Oxford, Michigan.

NOTICE—Owing to increased cost of production, the price of our special wavemeter (see February QST) will be increased. The present price of \$7.25 is effective until March 25. Specials: Bradleystats, type 210, \$2.30. DeForest 201As Isolantite base, \$1.00. Special transformer for "B" eliminators or low power transmitters. Filament 7.5 volts. Plate 215 volts. Unmounted \$1.95. For a steady note use our 1/2" extraheavy copper tubing inductance. 4" diameter, 12c per turn. 3", 9c. Your wavemeter accurately calibrated from General Radio standard, \$4.50. Quality merchandise and quick service. Send for free catalog, William Harrison, 35 Ft. Washington Ave., N. Y. C.

LICENSED amateurs only — Aero Short Wave Kit — \$3.18. \$60.18 Aero 7 Kit—\$36.39. \$146.34 Tyrman Ten Kit—\$87.81. \$25.00 Browning-Drake Kit—\$16.25. \$10.00 Emsco 36" Cone Kit—\$6.18. \$31.00 Modern B. Eliminator, with Raytheon—\$19.23. Discounts on Cardwell (transmitter items—15%), AmerTran, Jewell (transmitting meters—25%), Benjamin, Samson—35%. On Sangamo, Daven, Karas, Deutchmann, Aero, Hammarlund, Kodol, Silver-Marshall, Abox, Xaxley, Bodine, Ceco, Raytheon, Baldwin—40%. Postpaid. Our weekly data sheets give more "dope" than all radio magazines combined. Twenty weeks—\$1.00, 52 weeks—\$2.50. Over two pounds, catalog, data, circuits, prepaid—25c. Fred Luther Kline, Kent, Ohio. (Established 1920.)

BRAND new Sangamo 2 mfd. 750 volt tested filter condensers. While they last, 85c. James Marinell, 725 Oak Street, Youngstown, Ohio.

TUBES—RCA, Cunningham, all types including 222s, 210s and smaller, 20% off. Supertron & Loraco 40% off. Monthly list of ham parts on request. F. A. Kehoe, 68 Golf Ave., New Hartford, N. Y.

PURE aluminum and lead rectifier elements holes drilled brass screws and nuts, pair 1" x 4" 15c, 1" x 6" 15c 1 1/2" x 6" 17c, 1 1/2" x 6" 19c. Sheet aluminum 1/16" \$1.00, lead \$1.00 square foot prepaid, \$1.00 or more. Silicon transformer steel cut to order .014" 10 lb. 25c, 5 lb. 30c less than 5 lbs. 35c lb. .022" 5c less per lb. Not cut 2-7" wide 15c lb., minimum 10 lb. postage extra. Edgewise wound copper ribbon 7 sizes, see January QST. Air pocket and stand off insulators 25c each. 1/4 for \$1.00. Glazed porcelain 5 and 6 1/2" long prepaid on 4. Electrolytic condenser parts, \$1.50 prepaid. Geo. Schultz, Calumet, Michigan.

1000 VOLT 200 Watt Esco motor 110 Volt single phase \$75.00. 400 Volt 100 Watt Esco coupled to 220 Volt 3 phase Alternating motor \$25.00. New General Electric 500 Volt 100 Watt generators \$12.00. 750 Volt 300 Watt double commutator with 110 Volt single phase motor \$65.00. 2000 Volt to 5000 Volt Broadcast motor generators. Filament motor generators 50 to 200 amperes capacity. Also many others. 1/4 H.P. 110 Volt 3500 speed alternating current motors \$3.50 prices f.o.b. Chicago. James Smat, 1784 Grand Ave., Chicago, Ill.

Q R A SECTION

50c straight with copy in following address form only:

3AOP—E. Brandt Boylan, 2303 Franklin St., Wilmington, Del.

3QL—Samuel M. Hughes, 311 Barclay St., Burlington, N. J.

5DP—Raymond C. Moody, 204 Second St., Lumberton, Mississippi.

5SC—San Antonio Radio Club, 215 Glenwood Ct., San Antonio, Texas.

6DTL—Harry J. Baboian, 363 G St., Fresno, Calif.

6MU—San Francisco Radio Club, 454 Bright St., San Francisco, Calif.

9CPH—H. L. Durlfinger, 502 Caroline St., Peoria, Ill.

na7TO—H. H. Howell, Box 1411, Ketchikan, Alaska.

nc3AY—Albert B. C. Davey, Niagara-on-the-Lake, Ontario, Canada.

sb2IA—Ruben Simas, Rua Riachuelo 19, Cuihyba, Brazil.

The following stations belong to members of the A.R.R.L. Headquarters gang. Mail for them should be addressed care A.R.R.L., Hartford, Conn. When operating 1MK they use personal signs as indicated.

- | | |
|--------------------------|--------------------------|
| 1MK Headquarters | 1BUD A. L. Budlong "bud" |
| 1AL H. P. Westman "ws" | 1ES A. A. Herbert "ah" |
| 1BAO R. S. Kruse "lk" | 1GO L. A. Jones "lj" |
| 1BDI F. E. Handy "fh" | 1KP F. C. Beekley "beek" |
| 1BHW K. B. Warner "kb" | 1OA R. S. Kruse "lk" |
| 1BIZ C. C. Rodimon "rod" | 1SZ C. C. Rodimon "rod" |

Achieve SUCCESS in Radio

*Not by half-knowledge
—but by complete
thorough training*

New course gives finest
instruction obtainable

You Can Learn at Home!



R. L. DUNCAN,
Director,
Radio Institute
of America and
author of several
volumes on Radio.

Good pay from the start, rapid advancement, and phenomenal success—a life profession of fascinating brainwork—that is what Radio holds for the man who knows his subject *thoroughly*. Since 1909 Radio Institute of America has trained thousands to become successful in the many branches of Radio. Why don't *you* seize this opportunity to get into the commercial radio field where **REAL MONEY** is waiting for you?

New Course Finest Ever

Prominent radio men have enthusiastically greeted RIA's new course as the most complete and up-to-date offered today. A complete kit of first quality equipment is furnished **FREE WITH THE COURSE**—parts for making many practical radio circuits—the Peerless Signagraph and key and buzzer for code instruction.

*RIA backed by RCA, G-E
and Westinghouse*

You get all the benefits of instruction conducted by RCA and sponsored by RCA's associates, G-E and Westinghouse. Our employment department is at the service of graduates.

Study at Home!

Moreover you can **STUDY AT HOME**—when you please and as long as you please.

This new booklet describing the course is just off the press. If you want to learn more about the well paying positions in this fascinating profession send the coupon now for your copy.



RADIO INSTITUTE OF AMERICA
Dept. D-3 326 Broadway, New York City

RADIO INSTITUTE OF AMERICA Dept. D-3
326 Broadway New York City

Dear Mr. Duncan:

Please send me your new catalog. I want to know more about your new radio course.



Name

Address

FOR YOUR CONVENIENCE QST'S INDEX OF ADVERTISERS IN THIS ISSUE

Acme Wire Company	62
Advance Electric Company	77
Aero Products, Inc.	3rd cover, 82
Aluminum Company of America	58
American Mechanical Laboratories	60
American Sales Company	77
American Transformer Company	58
Aimrad Corporation	57
Aurilma, Inc., Ad.	87
A.R.R.L. Application Blank	75
A.R.R.L. Books	75
A.R.R.L. Handbook	75
A.R.R.L. Recommendation Blank	85
A.R.R.L. Stationery	71
Burgess Battery Company	4th cover
Cardwell Mfg. Corp., Allen D.	63
Central Radio Laboratories	82
Chicago Radio Apparatus Co.	40
Citizens Radio Service Bureau	74
Corning Glass Works	89
Cresradio Corporation	90
Crosley Radio Corporation	70
Crystal Valve Company	85
Cunningham, Inc., E. T.	65
Deutschehoff Co., Tobe	98
Dodge, C. K.	66
Donnan Electric Mfg. Company	72
Eastern Radio Institute	84
Electric Specialty Company	81
Electro Chemical Company of America	84
Ensell Radio Laboratory	86
Fansteele Products Company	70
Formica Insulation Company	61
Frost, Inc., Herbert H.	68
General Radio Company	2nd cover
Grebe & Company, A. H.	4
Grehen, F.	80
Gulf Radio School	86
Hardwick, Field, Inc.	76
Howell Broadcasting Co.	88
Jacobs, Chas. F.	71
Jewell Electrical Instrument Co.	87
Karas Electric Company	88
Leach Relay Company	89
Leeds Radio Company	85
Loomis Publishing Company	83
Massachusetts Radio & Telegraph School	78
McGraw-Hill Book Company	66
National Company	84
National Radio Tube Company	90
Old Colony Electric Company	85
Parent Electric Company	82
Pilot Electric Mfg. Company, Inc.	79
QST Binders	83
Radio ZMA Company	74
Radio Engineering Labs.	69
Radio Institute of America	94
Reiffler Engineering Service	88
Rooney, John T.	77
Sangamo Electric Company	72
Scientific Radio Service	80
See Jay Battery Company	87
Shure Radio Company	88
Southern Toy Company	82
Sterling Mfg. Company	82
Stromberg-Carlson Telephone Mfg. Co.	95
Teleplex Company	87
Thordarson Electric Mfg. Company	67
Utility Radio Company	88
Vibroplex Company	68
Ward Leonard Electric Company	79
Weston Electrical Instrument Corp.	96
Wireless Specialty Apparatus Co.	4
Wood, B.	90
X-L Radio Laboratories	78
Yasley Mfg. Company	76

The
GREAT BELL OF MOSCOW
 WEIGHING 435,000 LBS.
 which fell from its tower in
 1737. Its Tone was unspeak-
 ably beautiful.

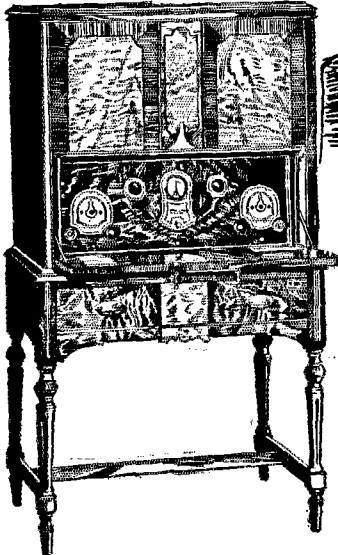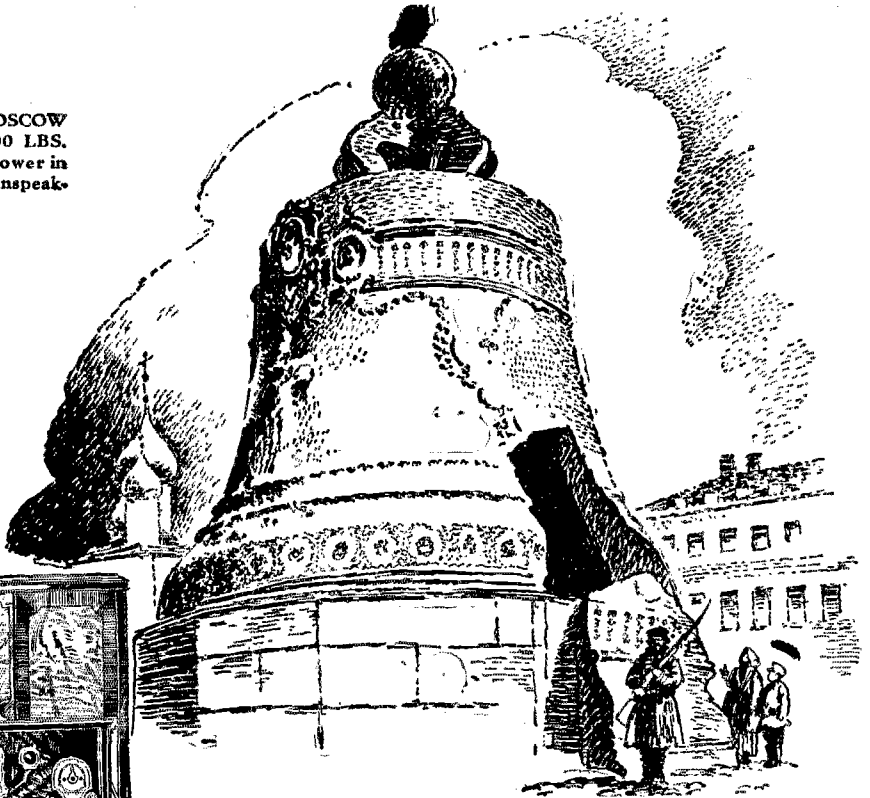

No. 634 A. C. Stromberg-Carlson as shown above. Price, with Audio Power Unit and 9 R. C. A. Tubes but not including Cone Speaker:

- | | |
|----------------------------|----------|
| East of Rockies | \$505.00 |
| Rockies and West | 545.00 |
| Eastern Canada | 670.00 |
| Western Canada | 710.00 |

The Stromberg-Carlson Hour,
 Tuesday Evenings at 8 o'clock,
 Eastern Standard Time, through
 the NBC and Associated Stations:
 WIZ, WBZ, WBZA, KDKA,
 KYW, WJR, WBAL, KWK,
 WREN and WHAM.

WEIGHT

an important factor in TONE

To know the resonant depths of Chaliapin's voice; the mellow beauty of Casal's violincello;—your Receiver must be able to bring out all the lower range of the musical scale.

Proper reproduction of low notes and heavy passages of music requires strong electrical current and a Receiver must have units of great capacity to handle such current. Material of this kind naturally has greater weight—and it is the massiveness of these heavy capacity units in a Stromberg-Carlson which makes the Receiver so heavy.

The Stromberg-Carlson shown in the illustration weighs nearly 300 lbs. No wonder that its tone quality is so superbly beautiful.

Your nearest Stromberg-Carlson dealer's address may be learned from his advertisements in your newspapers or in your telephone directory.

Stromberg-Carlson Telephone Mfg. Co., Rochester, N. Y.

Stromberg-Carlson


MAKERS OF VOICE TRANSMISSION AND VOICE RECEPTION APPARATUS FOR MORE THAN THIRTY YEARS

Say You Saw It In QST—It Identifies You and Helps QST

MATCHED INSTRUMENTS

2" and 3 1/4" Panel Types
in Two Complete Lines
for the Transmitter

*Also Portable Models
for the
Experimenter*

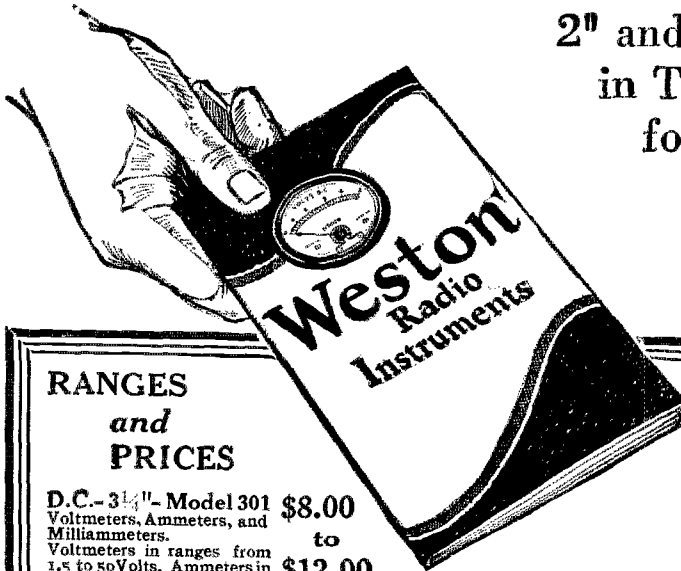

RANGES and PRICES

D. C. - 3 1/4" - Model 301 \$8.00
Voltmeters, Ammeters, and
Milliammeters. to
Voltmeters in ranges from
1.5 to 50 Volts. Ammeters in
ranges from 1 to 50 Amps.
Milliammeters in ranges from 1 to 800 M. A.

2" instruments — Model 506 — furnished at \$1.00 under
above prices.

A. C. - 3 1/4" - Model 476 \$8.00
and 2" - Model 517 to
Voltmeters, Ammeters and Milliam-
meters. \$12.00
Voltmeters in ranges from 1.5 to 300
Volts. Ammeters in ranges from 1 to
50 Amps. Milliammeters in ranges from 15 to 500 M. A.

Thermo-Couple \$12.50
Instruments to
Galvanometers, Ammeters and Mil-
liammeters. \$15.00
Model 425 - 3 1/4" Dia. - Model 507 - 2"
Dia. Ammeters in ranges from 1 to
20 Amps. Milliammeters in ranges from 125 to 500 M. A.
Galvanometers - 115 M. A. - 5.2 ohms.


WHERE AND HOW TO PURCHASE

PPROMPT instrument deliv-
eries can be made from
many sections of the country.

To avail yourself of this service just write or
phone our nearest representative for your
local source of supply. Weston representatives
are located in the following cities:—Albany,
Atlanta, Boston, Buffalo, Chicago, Cincinnati,
Cleveland, Dallas, Denver, Detroit, Houston,
Jacksonville, Knoxville, Los Angeles, Minneap-
olis, New Orleans, New York, Philadelphia,
Pittsburgh, Rochester, San Antonio, San Fran-
cisco, Seattle, Tacoma, Portland, Spokane, St.
Louis, Syracuse, Tampa.

**Weston Electrical Instrument
Corporation**

158 Frelinghuysen Ave. Newark, N. J.





Model 280

This very complete line of D. C. portable
instruments is in wide demand because
of their compact, sturdy construction
and reliability. Made in a comprehen-
sive list of ranges for all D. C. measure-
ments. Most reasonably priced.

A. C. and D. C. Panel Instruments

The illustration below is representative of the
complete line of 3 1/4" A. C., D. C. and Thermo-
Couple types. They are all uniform in size and
appearance. Their unusual characteristics are
fully explained in Circular J mailed upon re-
quest. See ranges and prices above.



Models 528 A. C. and 489 D. C.
Made in high resistance and low resis-
tance models for D. C. service and in
double range combinations for A. C. serv-
ice. This line also includes a triple range
—150/8/4 volts for A. C. receiver testing.

AERO COIL

SUPER-SENSITIVE

INDUCTANCE UNITS

The Perfect Inductances for All Low Wave Work


**FOR
RECEIVING**

AERO LOW WAVE TUNER KIT

Price \$12.50

Completely interchangeable. Adopted by experts and amateurs everywhere. Range 15 to 130 meters. Includes 3 coils and base mounting, covering U.S. bands, 20, 40 and 80 meters. You can increase or decrease the range of this

short wave tuner by securing the AERO Interchangeable Coils described below. All coils fit the same base and use the same condensers. Use Code No. INT-125 in ordering.

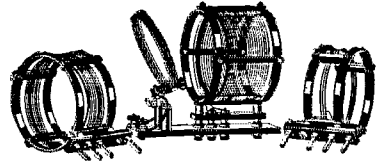


PRICE \$12.50

INTERCHANGEABLE Coil No. 0

Range 13 to 29.4 meters. This is the most efficient inductance for this low band. Code number INT-0.


Price \$4.00



INTERCHANGEABLE Coil No. 4

Range 125 to 250 meters. Fits same base supplied with low tuner kit. Code number INT-No. 4.


Price \$4.00



THE NEW AERO INTERCHANGEABLE COIL No. 5

Normal range 235 to 550 meters. However, by using .0001 Sangamo fixed condenser across the rotor and stator of the .00014 variable condenser, the maximum wave band of this coil is increased to 725 meters. This gives you coverage of the following bands: Airplane to Airplane, Land to Airplane, Ship to Shore (Great Lakes) Ship to Shore (Atlantic and Pacific Oceans). Code number INT-No. 5.

Price \$4.00



NOTE This new Aero Short Wave Kit is wound with No. 16 wire on secondary, making it even stronger, and cutting down the resistance appreciably.

**FOR
TRANSMIT-
TING**

KEY 2040 KIT

Price \$12.00

Kit contains 2 AERO Coils, 17 to 50 meters each, 1 AERO Antenna Coil Mounting Base, 1 AERO Grid Coil Mounting Base, 2 AERO Essential Choke Coils.

KEY 4080 KIT

Price \$12.00

Kit contains 2 AERO Coils, 36 to 90 meters each, 1 AERO Antenna Coil Mounting Base, 1 AERO Grid Coil Mounting Base, 2 AERO Essential Choke Coils.



KEY 9018 KIT

Price \$12.00

Completely interchangeable with either of above kits. Range 90 to 180 meters. Contains 2 coils and mounting base.

COMPLETE AERO TRANSMITTER KITS

Complete Aero Transmitting Coils for the 20-40 and 40-80 bands, \$20.00. Complete for 20-40, 40-80, and 90-180 bands, \$28.00.



AERO PARTS

Transmitter coils (17 to 50 meters, Key 2040C, 36 to 90 meters, Key 4080C and 90 to 180 meters, Key 9018C) \$4.00 ea. Antenna Base, Key PRI-300, \$3.00 ea. Grid Coil Base, Key GRID-100, \$1.00 ea. Choke Coils, \$1.50 ea.



PLAN FOR D. X. RECORDS NOW!

Order these coils direct from us if your dealer hasn't them and start now for wonderful records. Specify code or key numbers when ordering. Or write at once for complete descriptive literature.

AERO PRODUCTS, Inc.

1772 WILSON AVE., CHICAGO, ILL.

Take
no
Chances ~ ~ ~

BURGESS BATTERIES

Have proven their worth under every possible condition where batteries are used, since the beginnings of radio.



They are outstanding in the Amateur radio field, in the broadcast field, in the field of science and investigation. Wherever dependability is an essential, the black and white stripes are recognized as "the standard of quality."

You are playing a sure thing when you use

BURGESS RADIO BATTERIES


"Ask any Radio Engineer"

Madison, Wisconsin, U. S. A.

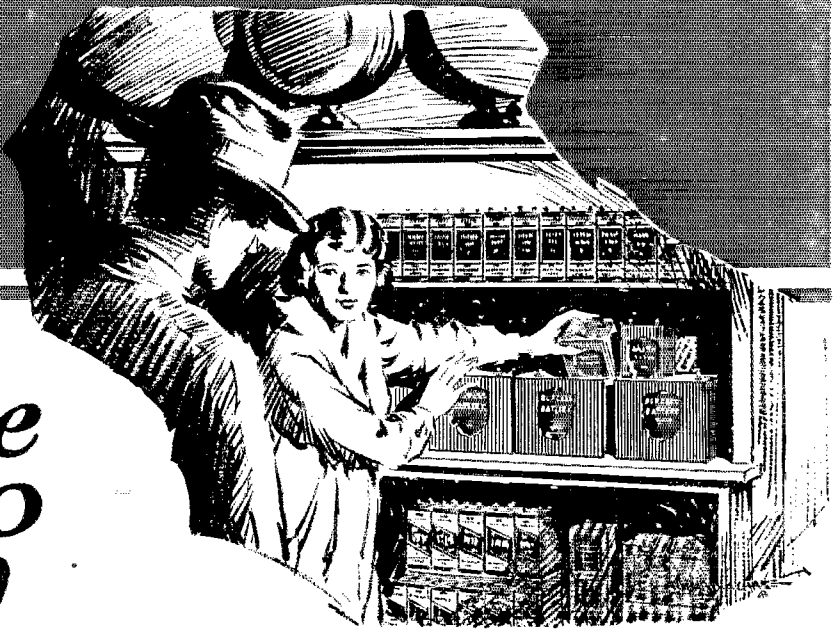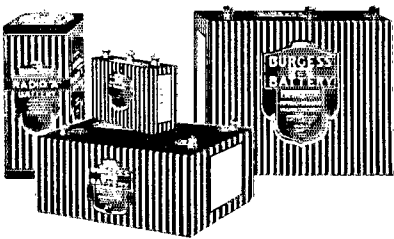

The Communications Department

F. E. Handy, Communications Manager
1711 Park St., Hartford, Conn.

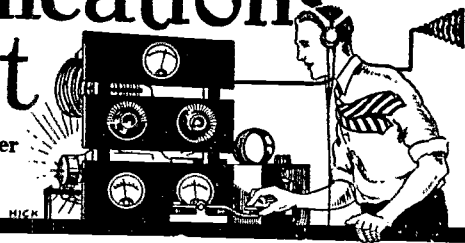

Communication With VOQ

By Charles J. Heiser, 8DME

DR. DONALD CADZOW, who in 1908 helped me rig up my first aerial, was appointed Ethnologist with the Putnam Expedition. While in Auburn, on a visit, he dropped in to see me. He had heard the ship they were going north with would have a transmitter and asked if he would be able to send messages to his folks at Auburn. Remembering the work of IANA with the MacMillan expedition (WNP) on its first trip with radio, and the big improvements in short waves since then, I told him there was no reason why it could not be done and contact held throughout the trip.

On June 11, I started listening but without success until the fifteenth, when VOQ, the Schooner Morrissey, was heard working 2UO and others. Calling my head off for three days, I failed to raise him with the 42.15 meter crystal control set. On the next night I had an inspiration and made a quick change with another crystal to 38.45 meters, and hooked up on the first try. This wave was used during the season's work, after making definite schedules for daily contact. Operator Ed Manley reported that the crystal note cut through interference fairly well.

I did not realize at first what a job I had taken on. After a few weeks of contacts and the thrilling stories that came thru, I became so interested I'd even listen to Ed working others and so missed little of the news, several times contacting off schedule when he had difficulty in getting thru to the other fellow. I was determined to prove that my statement to Dr. Cadzow was correct and that contact could be held consistently by amateurs. Letters began coming in from relatives of the expedition members, with answers to messages, requests for news of the men, which had to be put thru and answered.


The biggest thrill was the taking of the news story of the disabling of the Morrissey in the ice pack, after VOQ's silence of ten days. That was some night, fighting static and fading, taking the story and passing it on to the New York Times—an all night's job.

While the Morrissey was in Fox Channel, near Fury and Hecla Strait, atmospheric conditions were bad. When nothing but silence rewarded my calls, remembering past dangers, I passed many worried days, fearing that the Expedition might have had another mishap or wreck. The hook was heavy with messages. Folks were asking constantly for news. What a relief, when contact was again restored and reassuring messages came back home.

Friends of the Expedition would drop in while I was QSO, and have a chat, using Ed and myself as interpreters. How tickled Don's dad was when he found he could talk directly with his son, nearly 1500 miles away! Some of the finest souvenirs are the scores of letters of thanks for personal messages relayed to the home folks. I wish I could include some of them in this story. All were high in praise of the radio amateur, and if I hadn't realized that hundreds of others could do the same thing, they might have given me a swelled head.

Many things can bob up to make it hard to keep schedule, especially for a married man who has a couple of Junior Ops, a garden and a brand new car. Several times my employer wanted me to work overtime to finish some rush jobs. When out of town, I always had to plan to get back in time.

If the wife wanted me to take a trip in the new bus, the trip had to be arranged so as to be home at 6 pm, many times supper had to wait a few hours until the traffic was all through. When working VOQ someone would often walk in and want a set repaired, or want me to go fishing or to see a movie. Twice, storms interrupted power service. Once the crystal refused to perk. Forgot to test the "A" battery and it went dead at a critical time. A UX200-A detector became noisy and no 201-A tube I had would drag in the weak signals. On two nights, the UX210 frequency doublers decided their job was too hard and blew up. Sickness in the fam-

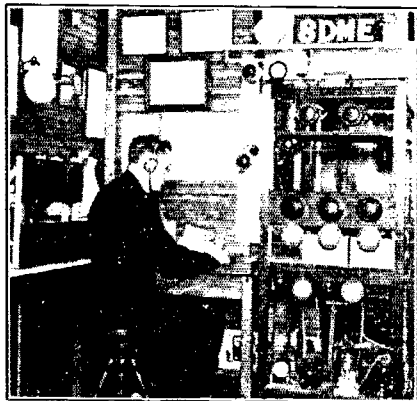

8DME

ily disrupted a lot of other schedules, but only made me miss a few VOQ skeds. One week I was supposed to be sick myself and had to sneak out to the shack. Friends would ask me what I would get out of all this work. Why not take the car and get some cool breezes instead of living in the hot radio shack all night? All real Hams know the answer to that question.

On the trip North, static, weak signals and bad weather were the rule. 20 meters was used as often as possible, the engines making interference so it was only useful when at anchor or using the sails. Several times we worked on twenty until the sigs faded, then shifting to a higher band and continuing with our work. On the return trip the 40-meter band was used almost exclusively as conditions were better with darkness coming on much earlier. Local storms had little effect on signals. Static, of course, made them harder to read. We worked right thru one bad thunderstorm here, on 20 meters, with the static discharging across the antenna series condensers, and the building shaking from crashing thunder, losing only a few words while the condensers were spilling over.

A few remarks by Dr. Cadzow, regarding the Morrissey, give a better understanding of conditions at VOQ.

"The transmitter is built against the side of the ship in the cabin where 17 of the party bunked. Every time the ship rolled badly, loose articles would slip against the apparatus so that when Ed came

to work he usually had to dig his way clear or perhaps take a few shoes out of the set. When the batteries were low, the crowd would ask him to QRT as he would nearly put the lights out when working. The counterpoise ran thru the cabin about head high. Anyone touching it when the key was down would get a nice burn. Ed, busy receiving objections, would then report 'Local QRM, QTA.' A rubber covered wire was put up to eliminate this form of QRM. At other times, he would start up and find poor output and investigating came across a bunch of wet clothes hung on the counterpoise to dry. On the way down, during the bad storms, Ed would joke to SDME about how nearly everyone was seaskick. All the while he was sitting at the key, his head on one arm and a pail convenient at his feet, so sick he hardly knew whether he would be able to finish the traffic or not. His shipmates all think very highly of Ed. No matter how tough the going or how much traffic piled on his hook, he would be on the job doing his bit without murmur or complaint."

The log at SDME shows that in our stand by periods, VOQ was unheard 106 times, heard 121 times and worked 82 times. 169½ hours were spent listening for and working Ed Manley. The traffic total was 181 messages, including much press received direct from the Morrissey. 93 originated messages were addressed to men aboard the Schooner. The longest continuous contact on 33 meters was 5¼ hours. On 20 meters it was 3 hours. The weather was clear at Auburn on 51 standby periods, cloudy on 15, very hot on 16, raining on 22, and storming 9 times. The transmitter was crystal control fed by a General Radio crystal oscillating at 153.8 meters, with a five watt. Two 7½ watt frequency doublers had 600 volts on the plates. A 203A was used in the neutralized power stage on 38.45 meters taking 150 mills at 1500 volts on the plate. Heavy duty Eveready "B" batteries were used for the negative bias on the grids, 67½ volts on the xtal tube, 225 on the 7½ watters and 135 on the 50 watt. The antenna was a horizontal Hertz using a one wire feeder. The receiver was an ordinary regenerative detector and one step audio.

In delivering messages it is well to inform the addressee that regular contact is held and a reply can be forwarded, without cost to him. This policy gave me a chance to have something on the hook for every schedule. Many messages were forwarded by Western Union, and toward the end of the voyage, the night op would call me up to see if I had anything for him. A practice was made of typing the messages on regular forms and mailing them the next morning to avoid delays. With speedy relaying and delivery, these became merely confirmation copies.

A curious idea most of the uninitiated have was revealed in letters received. Many believed their message sent broadcast by VOQ and that an amateur just happened to listen in and copy it, not realizing two-way communication possible.

Accuracy is most important of all in message handling work. Technical reports and messages ordering supplies require great care in handling to avoid mistakes. It would be easy to get the wrong size or number of tons in an order for a winter's supply of coal but not at all good to have your call on that message. Much of the ordinary work an amateur does is good practice for the real test that comes, in doing this sort of work, which cannot be done in any other way. The thrill of the first contact with a fellow amateur, getting the first DX and the first foreign contact, are as nothing compared with doing this sort of work with an expedition and living their adventures with them. It is no doubt the next best thing to actually being with the expedition. I am grateful to those amateurs who regularly helped me to relay traffic, especially 8CVJ, 8AHC, and 8BUM in Manley's home town.

The Morrissey with Capt. Bartlett in command and Ed Manley operator of VOQ is going on another expedition. The start will be made from Seattle, Washington, about April 1. The party will take the inside passage to Alaska, follow the Alaskan Peninsula to the Aleutian Islands and across to Kamchata and back to Nome, then to East Cape, Siberia, touching the new Siberian Islands, the Delta of the Koxima River and possibly Nicholas II land before returning to Seattle. The west coast fellows will have a chance to do some good work with VOQ next summer. I, personally, will donate an H tube to the ham who comes nearest to SDME's performance in working VOQ, or who beats it.

VDE and the Hudson Straits Expedition

By C. H. Starr*

WITH much tooting' of whistles and a salute from the coast defence guns, a Canadian Government Expedition sailed from Halifax July 17, 1927 to establish three aeroplane survey basis in the vicinity of Hudson Straits in the sub Arctic. There were two ships in the expedition, the C. G. S. *Stanley*, carrying a small seaplane and the expedition personnel, and the S. S. *Larch*, carrying construction crews, six Fokker universal planes, and some thousands of tons of supplies, building materials, and scientific apparatus.

Radio played a most important part in the work of the expedition throughout the time the *Stanley* and the *Larch* were in the north and is still doing so at the base stations in the north. Due to almost continuous fog both vessels, were navigated almost entirely on radio bearings from the time Halifax was left until out of range of the last D. F. station at Belle Isle. The *Larch*, VFW, was equipped with the usual long-wave tube installation, while the *Stanley*, VDE, carried both long and short-wave gear. The long wave equipment on both ships consisted of 500-watt (output) 600 to 2100-meter c.w. —i.c.w. transmitters and detector-two-step receivers. The *Stanley's* short-wave installation consisted of a seven-tube superheterodyne receiver and a beautiful master oscillator power amplifier continuous wave transmitter built along the lines of the Marconi beam sets and having a rated output of 500 watts.

Although the *Stanley* was fitted with a gas engine driven generator for use as a reserve power supply, it was necessary to install one of the old ten-inch spark coil plain aerial emergency sets for the Old Man's special benefit. He had no faith in the tube equipment because there were no sparks flying when it was in operation.

For a period of nearly two weeks, after entering the Straits, contact with the outside was maintained almost entirely through amateur stations. Canadians 1AR, 2BE, 4FV, 9AM, 9AL, 9AI, and 9AQ, and n9DR all helped us out at one time or another. Traffic was also handled through VYG and WNP, 1AR in particular deserves credit for the way he stuck with us hour after hour. The best DX worked was o2RX. There was little opportunity for working the gang at random, chiefly due to having nearly every minute taken up with other work, and it was not long before contact was established with VBN at Port Nelson on long waves and with the signal corps station XWAB at Ottawa on short waves, which gave us two official outlets for traffic, though communication with the latter station was at no time very satisfactory.

There was a perfect flood of traffic throughout the trip. Many a day there were twelve to thirteen hundred words of message traffic to be cleared, reams and reams of press to be copied, the "Daily Gleaner" to publish, various tests to carry out and frequently an almost continuous watch had to be kept on 600 meters. In fact we sometimes had to stand watch as best we could simultaneously on 600 meters while working on short waves, and frequently had to break off in the middle of a short-wave QSO to go on long waves.

All this hard work was done under difficulties. Loose sockets and switches all over the ship caused considerable inductive interference. Until late in the trip, we had a seaplane and a regular forest of wire rope for an antenna dielectric. We frequently dropped anchor in landlocked harbors where high cliffs shielded out the signals which were already weak due to the long distances over which we were working. Not a little of the traffic was in difficult code and many of the messages had checked up in the hundreds. Even elbow room was often at a premium. During the first part of the trip there were three radio engineers, five operators, two radio-tricians, two electricians and several signal corps men on board all of whom insisted on camping in the radio shack! Then when signals got bad, important traffic began to pile up, schedules overlapped, the chair began to slide around on the floor, and things in general all began to happen at once it was no picnic.

*Acadia University, Wolfville, Nova Scotia, n1AE, ex-VDE.

I am not able to say much about reception conditions in the Straits due to lack of time for making observations and because there were many uncertain factors entering into what few observations we were able to make. Conditions seemed uncertain, changing frequently and rapidly. Periods were experienced when no signals at all came through on short waves.

Although it was often a two hours job to properly retune the short-wave transmitter it was tried on several different wavelengths. Daylight working on 23.8 meters was found far more satisfactory than night work in the vicinity of forty meters.

All our short-wave work had to be done under trying conditions. On long waves we had a fairer chance and they showed up particularly well by contrast. CKD with only a 100-watt set and small antenna experienced little difficulty in working 600 or 800 miles across Hudson Bay on 600 meters C.W. WNU at New Orleans on 3381 meters and VAS at Glace Bay 2200 and 2300 meters could be copied nearly every night throughout the trip. Great Lakes coast stations and European broadcasting stations were often heard on 1600 meters. On good nights 600-meter signals from as far south as Central America were logged. Broadcast reception was practically a failure throughout the summer, though it appears that during the winter months excellent programmes are often received in the north.

The periods when we had no signals on short waves correspond with the periods of poor reception reported by Manley of VOQ. The *Morrissey*, by the way, was not far from us all summer but we never chanced to meet her and seldom heard her signals.

While in the north I learned that Bishop Turquetil at the Roman Catholic Mission at Chesterfield Inlet, on the northwest corner of Hudson Bay, had recently gotten a short-wave transmitter on the air under the call nc5CI. Listen for him, gang.

The 1600-watt long-wave set at VCH, Port Burwell, on the eastern end of the Straits; the 500-watt long-wave sets at VCJ, Wakeham Bay, situated about half way through the Straits, and at VCB, Nottingham Island, on the western end, as well as the 500-watt short-wave set at VCJ are all on the air at the time of writing. Home made short-wave sets should be going before long at VCB and VCH. The *Stanley's* short-wave transmitter is now installed at Ottawa, with the call VFL, where it is taking care of the Headquarters end of the Ottawa-Wakeham Bay circuit formerly maintained through the army station XWAB.

20 METERS

1BYV (Framingham Center, Mass.), "There are quite a bunch of South Africans on '20' now, foA3Z, foA3C, foA4X, foA5T and foA8P. foA3Z is QSA here from 9 a.m. until 7 p.m. 1AXA hooked ai2KX, and foA3Z tells me that ai2KW and ai2KT are also on '20'. I am on the air for 20-meter Aussies regularly at midnight EST."

6EA (Los Angeles, Calif.), "Have heard the following on 20 meters: eb4WW, ndHIK, nj2PZ, oa2MH, oa2UK, oa4BD, oa4RB, oz1AX, saFO6, sc2AR, sc2AS, sc8AG and xCR10. Have been heard by eg5HS, eg6MU, sc2AII and by Mr. Frank Pemberton of London, Eng."

nc3CS (London, Ont.), "20-meters holding up well in the daytime but ND nights. Have worked na7MN, WNP, g2IT, eg6TD, eg5BY, eg2OQ and eg2KF."

7FE (Portland, Ore.), "Have heard only three South American stations and been QSO all of them. eg5ML has the most consistent DX signal. Have worked WNP, su2AK, sb2AR, eg2OD, suIBU and x1HV (on a ship, 795 miles south of San Pedro when worked). European signals can be heard best from 1730 to 1800 Greenwich."

8AXA (Syracuse, N. Y.), "Worked XA1 giving his QRA as Umba, Gaumba, South Africa. Have worked 33 'eg' hams and one in the Irish Free State on 20 meters."

8DTN (Washingtonville, Ohio.), "Just worked sgA8 located on the South Georgia Island 1000 miles East of Cape Horn. George Moreau is the op and wants the gang to watch for him on 19.8 meters. Find '20' rather queer. Some days hear all kinds of DX—others N.G. eg5SW on 24 meters is R5 to R9 regularly between 3 and 4 p.m. EST."

9ANZ (Lincoln, Neb.), "Last week I planned on writing you that more fellows should use phone on 20 meters—but after Sunday p.m. I will say no such thing; there were plenty. What I do say is, 'Let's have fewer POOR phones or no phone at all unless it's a good one.' Ever since my first attempt at 20-meter work three years ago I have been using this

band. While things have been dead recently, conditions were FB all last summer and spring. Have been trying phone on '20' only since the new regulations went into effect and have had some very rare sport. Reports on my modulation are now excellent and while my layout is far from perfect it has already been greatly improved as indicated by the reports. Some of my QSOs have lasted more than one hour and the reports state that every word was clearly received. In fact I have had so many complimentary reports on my phone that I have begun to believe it good myself!"

eg5ML (Coventry, England.), "20-meter work still continues in fine shape. QRP tests have begun using an input of 8.75 watts (350 volts at 25 mills RAC). With this input results appear to be the same, hi! The first day resulted in a total of 7 nus worked. 8CJM, Ohio, reported R8, and 7FE reported R4. It would be interesting to know if there are any other European stations who have worked the 7th nu district on 8.75 watts input. Nu7FE has been worked five times recently, and seems to be the only nu7 coming through. Where are all the others? At week ends, from 1430 to 1800 GCT, the 6s are being logged quite well. Nu6AM is heard here at R7 and so far is the best 6th heard. In conclusion, I would be pleased to receive any reports on my 20-meter signals from districts 5-6 and 7."

8DLD (Tawas City, Mich.), "On '20' entirely now so if my old friends want to QSO—come on down! Must compliment 9ANZ on a fine 20-meter phone, the best amateur phone heard. foA3Z swears by TP-TG circuit for 20 meters and I second it. foA8P also comes through fine and is a cheerful OT. eb4AU wants a sked with west coast or with someone who can QSO him and 6's, 7's, and 'oh' on '20', time should be 3 p.m. EST or later. eb4AU is fine outlet for European traffic. On my deliveries from WNP I let the folks know how the message got to them—and get much return traffic. Suggest the gang use A.R.R.L. message blanks and fill 'em in for this so folks will understand and not be afraid or doubtful about sending a reply."

ARMY-AMATEUR NOTES

FIRST CORPS AREA—The Bulletin on Radio Procedure which was recently issued in this area, contains such valuable things as the Army "Z" signals, the exact Army procedure in message handling, operating regulations, all procedure signs, and some examination questions. The Bulletin takes the form of a 27-page mimeographed booklet, and should be very useful.

SECOND CORPS AREA—The contest which was announced in January, QST, revived a great deal of interest in A-A work. The winners are not as yet known here. It is planned to reorganize the various nets into State and County Nets, similar to the 1st. Corps Area plan. 2AND has resumed his skeds in the Brooklyn-Staten Island Net. 2CP is busy organizing a Coast Guard Net of stations located along the Jersey coast, and would like to hear from amateurs in that section. 2EV, 2AFV, and 8HJ continue to keep their Net schedules regularly. 2SC, the C.A.N.C.S. can be heard every night on 77.8 meters. All A-A work is done between 76-78 meters, and it is desired to have an active A-A station in every city. All interested communicate with 2PF.

THIRD CORPS AREA—3BN and 8BVO are new stations in this area. Successful and consistent schedules have been carried on by 8GL, 8BPD, and 8DNU. 3SN, the Signal Corps station, has been keeping satisfactory schedules with the Pacific Coast and with WNP.

SEVENTH CORPS AREA—9DVI, assigned as control station, Governors Net, Iowa. 9BCT assigned as 2nd alternate control station, Governors Net, Minnesota. 9DPB designated as the principal radio station of Company I, 205th Infantry, National Guard of Minn., St. Cloud, Minn.

EIGHTH CORPS AREA—5ASQ is a new station in this area. A great deal of traffic has been handled by 5AIN, Fort Sam Houston, Tex., and reliable communication was maintained with 2CXL.

OFFICIAL BROADCAST STATIONS

(Additions)

6BBJ
7FL
7FL
8AC
86DB

BRASS POUNDER'S LEAGUE

Call	Orig.	Del.	Rel.	Total
8EU	49	73	460	582
9A1N	62	22	428	512
1FL	72	142	285	499
1CRA	125	80	276	481
8DBM	46	62	366	474
6AMM	81	276	52	409
8CYK	93	29	284	406
8BAU	27	21	342	390
8AHC	18	24	302	344
8AYU	263	1	21	336
3SM	41	86	205	332
9DAE	24	28	272	324
9DLD	25	39	255	329
8BEV	67	14	229	310
8DED	64	48	196	308
3AKB	44	52	207	303
9CZC	2	9	282	293
7MG	184	25	78	287
1LM	36	21	230	287
8GT	7	14	264	285
3CFG	23	16	255	284
1AKS	38	19	226	283
9DTK	96	45	136	277
9EJQ	32	35	209	276
8DAQ	30	19	216	265
2AFV	37	21	207	265
25C	95	39	128	262
1BBC	16	21	216	253
9DZW	15	17	220	252
6BSN	22	71	118	248
8CGZ	7	16	224	247
3QP	98	48	96	242
9BKV	48	6	182	236
9EAM	7	49	170	226
1CTI	23	21	174	218
8D1H	68	18	129	215
9AMO	4	7	204	215
9EBO	159	6	46	211
2HV	64	135	12	211
1VB	1	4	204	209
8BYN	52	12	141	205
3KU	24	7	173	204
8CFL	43	21	139	203
9EHN	6	16	180	202
9DOE	46	21	133	200
3ZF	58	53	72	183
1APL	9	54	106	169
9ABM	11	88	56	155
9EK-XH	76	54	2	132
nc5AL	60	61	4	125
6DKX	13	60	34	107
1MK	36	63	15	104

TRAFFIC BRIEFS

The San Francisco Examiner, in telling of the DX accomplishments of 6ZAT mentions the fact that Eitel has been QSO with South Africa 105 times in the past four months.

Didja ever stop to think that when you send "V" for a half hour at a stretch you may be bursting up someone's QSO's? It shouldn't take over a minute at a time of testing to get the ole junk pile perking OK. And besides, no one thinks you're a commercial just because of those "Vs".

Nc3VS and nc3HE have gone way up north in the wilds of the Red Lake Gold Fields to op for the Ontario Forestry Branch. They're situated about 150 miles apart. 3VS sez the mercury where he is gets down to 52 below some nights! Whew!

One of the United Press bunch in New York informs us that there are many amateur fones on the 40 band. Bad stuff, gang,—better watch your step! You know it's against the law.

The Wilkins' expedition this year will use a "Lockheed Vega" all wood plane, and will go via Fairbanks and Barrow. Radio equipment will be a Heintz and Kaufman 50-watt xmitter with wind-driven generator and a portable receiver. Probable QRH of xmitter will be 32.75. No chance to work him, fellows, but Wilkins will send QSTs from the air, and wants

us to copy as many of these as possible. The plane will also carry a gas-engine drive for the generator if forced down, and will then use the portable receiver. Starting date unknown as yet.

A charming "YL", 6BXA, acted as chairman at the recent Pasadena Shortwave Club's hamfest. Director Babcock, 6ZD, oa5AO, and 6BUR, former Section Communications Manager were the principal speakers of the evening. Order was kept even though every ham was given a whistle and told to blow it until the "noise was enough to blind you".

Following message just mailed down from 1FL: "During January, WNP took a vacation. To you in the States, whose hobby is brasspounding and whose greatest pleasure comes from QSO with a far distant ham or with handling messages with a brother operator, a vacation from radio operating may seem a foolish and useless thing. Operating a station like the *Bospodin* is nearly a perpetual vacation; but given eight hours a day for six months with the cans on and several hours thrown in stringing antennae, building transmitters, and wondering why in the name of all creation some days should go dead and nothing be audible between the wavelengths of 10 and 1000, one feels like forgetting dots and dashes for a while.

"Thus on January seventeenth at midnight WNP cleared the hook with 1FL and closed down indefinitely. HM left next morning on a trip over the harbor ice to the nearby village of Nain. From Nain the trip was extended to Ford Harbor, twenty miles further out, where we were caught in an Arctic gale and marooned in a little trading station, although with plenty of food and fire, for four days. Back in Nain, which we made during a lull, the gale held us again for two days before we could return to our station in Anatalok Bay.

"WNP was on the air again the evening of January 27, to find the air dead on 40 and 80 except for a few commercials. January 28 we managed to raise a few stations on twenty and forty, but eighty was still dead. On Jan. 30 eighty meters became fair, and we handled quite a number of messages on all bands.

"For January the message total was 349 in spite of only half a month on the air. Of this total 1FL handled 196, 9AFA handled 50, ne8AE 32, 1XV 13, 1SZ 10, and miscellaneous stations 47. Messages were divided between the three wave bands as follows: 20 meters 234, 40 meters 1, 30 meters 114. It is a great relief when able to work nu stations on 80 meters after continual QSS on 20. Feels great to work BK-IN with 1FL on 85 meters.

"Following stations were in communication with WNP during January:

Twenty meters

1aba 1aem 1atj 1awe 1axa 1axq 1bat 1byv 1ckp 1ez 1fl 1kl 1sz 1xam 1xv 2afx 2auz 2bx 2jn 2vi 3akw 3nz 3ik 5zav 6am 8ahc 8ail 8avb 8avu 8bde 8che 8elp 8emb 8egc 8ezr 8dah 8dhp 8dij 8dd 8dmx 8dsi 8oq 8wb 9afa 9alz 9anz 9cej 9cki 9efh 9c3cs eg6yx eg6fz eg6rb gi2it es2nx rjc.

Forty meters

1fl 4lx 8ail 8oq 9eJo 9nk.

Eighty meters

1ait 1atj 1awp 1bub 1fl 1hb 1xv 2ag 2bsc 2dn 3ade 3aem 3afw 3ku 3qj 3sl 3sn 3zf 5acd 7aju 8acz 8ahc 8bas 8bsm 8bfh 8bnr 8bti 8cl 8daq 8dbm 8doq 8gi 9aat 9afa 9ahq 9bns 9cnp 9erm 9dgv 9drh 9ebo 9eJq 9eJt 9elx 9oy 9rr nc8ej ne8ae.

"Best regards, OM—(sig) Cliff Himoe, WNP."

This one hasn't much to do with radio, but it's too good to keep to ourselves. 9BKV found it in the *Chicago Herald and Examiner*, and passed it on to us:

"R. M. sends us this story of a young bride who asked her husband to copy off a radio recipe she wanted. He did his best, but got two stations at once, one of which was broadcasting the morning exercises, and the other the recipe. This is what he took down: Hands at hips, place one cup of flour on the shoulders, raise knees and depress toes and mix thoroughly in one-half cup of milk. Repeat six times. Inhale quickly one half teaspoon of baking powder, lower the legs, and mash two hard-boiled eggs in a sieve, exhale, breathe naturally, and sift into a bowl. Attention! Lie flat on the floor and roll the white of an egg backward and forward until it comes to a boil. In ten minutes remove from the fire and rub smartly with a rough towel. Breathe naturally, dress in warm flannels, and serve with fish soup."

Our Section Managers



L. ELDEN SMITH

Former SCM of Los Angeles Section, comes originally from Ohio, but first became interested in radio when he moved to California in 1919. He is 21 years old, and has made his call, 6BUR, very well-known. At the present time Mr Smith is operating KFLP on the yacht Ripple.



C. E. FFOULKES

SCM Florida, entered amateur radio in 1920, and is now licensed under the call of 4LK. He is a clerk in the Barnett National Bank.

ARTHUR G. WESTER, JR.

SCM North, N. J., has been a ham since 1913. His present call, 2WR, is the only one he has had. He is twenty-four years old, and was married in 1926. Art is a Jobbers' Salesman for the Radio Dist. Corp., of Newark. He's been ADM since 1924.



WM. LEONARD CLIPFARD, JR.

SCM Arkansas, got himself bitten by the bug in 1920, but did not have his own station until 1925, at which time the call 5AIP was issued to him, and has been his ever since. He is 17 years old, and is attending school with a view toward being a radio engineer. He says his height of 6 feet 2 was attained by putting up antennas, hi!



V. W. HODGE

SCM New Hampshire, has been in the game since 1915, previously used the calls ITAJ & VH, and now has 1ATJ. Mr Hodge is associated with his father in distributing Gulf Refining Co. products. He was married last April. 1ATJ is a prominent traffic station.

ED. S. BROOKS

SCM British Columbia, is a real old-timer, having entered the game in 1911, and now has nc5BJ as his call. During the war Ed was a Signaller with the Canadian Infantry in France. Later he transferred from the Infantry to the Wireless Section (1916), and was wounded at Paschendale in 1917, losing his right leg. He is now a radio telegraphist, being the Chief Operator of the B. C. Forest Service Chain of Stations.



W. E. SCHWEITZER

SCM Illinois, is a graduate with BS in ME from the Armour Institute. He has been in radio since 1913, and has held various League appointments previous to his present one. His station, 9AAW, is well known to most hams. Experimental 9XBD and 9ZW have also been held by Mr. Schweitzer. Bill was Chairman of the 2nd and 3rd National Conventions. He is 26 years old, single, and is engaged in the building industry.



J. W. PATTERSON

SCM San Francisco, entered radio in 1924 with the call 6VR, which he has kept ever since. He is 24 years old, and is the Asst. Genl. Mgr. of a Buick Authorized Repair Shop. 6VR has done excellent work, and Mr Patterson is working hard to make it a call he can be proud of.



CY L. BARKER

SCM North Minn., has the call 9EGU, and has been in the game since 1921. He is 25 years old, and another of these 6 foot 2 men. Yes, he's unmarried. Cy is engaged in the Insurance business.

HENRY H. FLETCHER

SCM of Idaho, and owner of station 7ST-ALD. 7ALD is the portable call, and 7ST is one of the active traffic stations of Idaho. Fletcher has been SCM for over a year.



DIVISIONAL REPORTS

ATLANTIC DIVISION

EASTERN PENNSYLVANIA—Acting SCM, E. L. Maneval, 8EU—8EU was fired, but gained a commercial first, also lost part of mast. 3SM handled war traffic from Nicaragua and has a brand new YL op. Congrants, OB. 3AKB likes the new RM's ideas. Her total shows it. 8CGZ is remote control from the kitchen. 3QP has Phila. on skeds like a RR timetable. 3ZF has 9AON for asst. op. 3NF lives in hopes of better totals. 8AVK sleeps alongside his pet crystal. 3ADE discovered his ORS QSKd on Thanksgiving Day and never knew it. 8RQ wants skeds with Scranton to save stamps. 8WJ, 8RQ and 8BQ visited the Williamsport gang. 3BIT had MG trouble but is going on 20 and 80 again. 3AWT dropped way down due to school. Tough, OM. 3AFJ keeps 3 skeds on 42.5. 3QM has varieties of QRM. 3VF is out for club members. 8CCQ alias "poz" is a sheik with YLs at 8XE. 3CDS wants us to be on at 1:30 to 3:00 am. Wow. 8BIR tries 80 meter for DX after his nightly visits at 8CCQ. 8AVL is out for Feb. tests and prizes. 3ZM don't even say beans. 3LC is QRW but what with? 3HH is going in for the Tests.

Traffic: 8EU 582, 3SM 332, 3AKB 303, 8CGZ 247, 3QP 242, 3ZF 183, 3NF 177, 8AVK 169, 3ADE 164, 8RQ 92, 8WJ 66, 3BIT 64, 3AWT 43, 3AFJ 30, 3QM 27, 3VF 15, 8CCQ 15, 3CDS 13, 8BIR 9, 8AVL 7, 8ZM 7, 3LC 5, 3HH 2.

MD-DEL-D. of C.—SCM, H. H. Layton, 3AIS—Here I am, fellows, once more writing up your reports as SCM and very glad to be at it again. The number of reports received for last month does not look encouraging but I know from the past what can be done and will look forward to you fellows cooperating with your SCM by sending in your reports cards each month. Thanks.

Delaware: 3AED is having rectifier trouble due to its freezing up tight. 3ALQ is heard occasionally on 38.5 meters. 3SL prefers 80 meters and reports working WNP. 3BSS is off the air now. 3WJ is giving the BCLs a rest while rebuilding a new transmitter. 3AJH signed up with the Naval reserves—his AC sigs can be heard on 40 meters. 3AIS has a 250 watter RAC perking on 38.5 and 78 meters.

Maryland: 3BBW reports no traffic but plenty of tube trouble but will be on the air again shortly. 3BCX has moved to Hagerstown and will be QRW for traffic soon.

D. of C.: 3BWT is still going strong on 39 meters with Harvey and Duncan also Sutherland and occasionally Darne at the key. No regular skeds. 3ALF reports traffic plentiful on both 40 and 80 meters and gathers it in when not QRW at school.

Traffic: 3AIS 7, 3BWT 13, 3ALF 11.

SOUTHERN NEW JERSEY—Acting SCM, E. G. Raser, 3ZI—Activities in this Section mainly center around the northern part as apparently few of our southern ORS are on the job. 3ZI, the new acting SCM, is on the air working schedules daily and is keeping a sharp lookout for all active stations. 3BSD has been made ORS and has well earned it as an active station in this section. He has two complete transmitters working now, both on 40 and 80 meters. 3CFG is our high man again this month, having made an excellent total with only 9 actual operating days. 3AIY, formerly of Phila., has moved over to Jersey and is now located at Merchantsville. He wishes re-appointment as ORS. (You shall get it OM—SCM). 8EP is on the job working 40 meters to the limit, and reports good results down there. E. G. Raser now acting SCM for Southern New Jersey, requests all ORS and active stations to get in immediate touch with him as he sincerely needs the whole-hearted cooperation of all stations in his section. Either write him or address a radiogram to 8ZI, Trenton, N. J.

Traffic: 3CFG 284, 3BSD 58, 3ZI 141.

WESTERN NEW YORK—SCM, C. S. Taylor, 3PJ—This month brings to us the valuable work that two Official Observers are doing. Several notices have been sent out by these stations and they have received replies to most every one sent out. FB, OMs. 8BAG and 8CDB are responsible for this untiring work and gratefully solicit your request for

a station check. 8ALY and 8AHK have explored the 10 meter band and have successfully transmitted locally on same. Recently the SCM and the gang from R.A.W.N.Y. paid the R.S.T.A. a visit and all had a furious time. 8ABX has been back with traffic again and schedules. 8AHC has worked South Africa, Europe and WNP and keeps many scheduled. 8AIL will be off the air on account of going to Europe. 8AKZ was heard 2200 miles off the coast of S.A. using a 50 watter. 8ALB works Italy, Australia and New Zealand quite often. 8ANX has been off the air due to business pressure. 8BCM was heard by fo-A3Z on 20 using an old 5 watter. 8BFG has had trouble with a BCL but managed to keep schedules and traffic going good. 8BIW works 7th district and also has had trouble with BCLs. 8BLP still works 6s and 7s and has schedules with a few stations. 8BRD has been operating at WHAM but managed to get a few msgrs. through this month as well as working a few 6s. 8BQK has been out of town and managed to get time to put one msr. 8BYE will be inactive for a month or so due to pressure of business. 8BZP has a busted arm so he has to use the left wing to push the key with. 8CDB has worked Italy, Australia, England and Spain. 8CDC has been working 6s using 210s with 350 volts of B battery. 8CNT has been working 6s keeping schedules and handling traffic. 8CNX has worked many foreigners on 19.8 and 39.5. 8CPC has been QSO with Cuba and many 6s. 8CRF has been heard in England on 80 meters and is after schedules. 8DME worked California and Gulf of Mexico. 8DNE works all foreigners on 37.7-42.6 daily. 8DRJ has been working foreigners regularly on 38.52 operating at noon and 8 pm daily, also WNP. 8NT has been on very little on account of college but gets a few msgrs. through now and then. 8OA works WNP and keeps schedules. 8QB is now handling traffic for Germany and also working many 6s and 7s. 8TH is back with us again with schedules and traffic. 8VW has been very busy with work so no traffic report this month. Many stations have been handling traffic and schedules are on the increase over last month so things look forward to a more lively section.

Traffic: 8ABX 6, 8AHC 344, 8AIL 5, 8ALB 61, 8BCM 53, 8BFG 9, 8BLP 10, 8BRD 7, 8BQK 1, 8CDB 271, 8CDC 115, 8CNT 48, 8CNX 90, 8CPC 19, 8CYK 406, 8BIW 16, 8BMJ 45, 8AYU 336, 8CJV 3, 8BHQ 12, 8DDL 23, 8DME 15, 8DNE 29, 8DRJ 63, 8DSP 112, 8NT 5, 8OA 52, 8QB 12, 8TH 7.

WESTERN PENNSYLVANIA—SCM, G. L. Crossley, 8XE—But for two stations, we would have had a perfect score this month. That is very good, gang, but why do we let two stations keep us from that perfect score? The fact is, however, that we are fast eliminating the ORS that fails to report. One of the two above is to receive cancellation because of not reporting three consecutive months. I believe in a couple of months we will have a 100% reporting gang. If there is anyone in the Western Penna. Section that is keeping on the go, it is our RM. Yes, he is more so than even the SCM. Look at his message report every month, he most always heads the list and I believe since he has been the RM, he has headed the list every month. He has just received the good news that his old call letters thru the help of Darr, the Central Division Director, and cooperation of the R.I. have been assigned him. They have been in the balance now for over 8 months. 8CES is QRW with work for his bread and butter. 8AGQ is busy with some experiments and has entered in the International Tests. 8BRC is busy on phone and has no time for the bug. 8AGO has changed jobs so is busy trying to get straightened out. 8BGW handles a few schedules. 8VE is having trouble with a power leak. 8ARC blew 2 plate transformers but is using the 450 volts of B bats. 8AKI is QRW code instruction in connection with the local club at Altoona. 8DFY says a local cut rate store just unloaded a carload of RCA 3s and 3As in his town. That's tough, OM, can't you move down here? Hi. 8ABW is having trouble putting up an aerial since he went housekeeping. That's only natural, OM. We all have the same experience. 8EW just put in a 250 watter with a sync rectifier. 8CFR is still looking for some reliable schedules. 8CEO has practically cleared all the QRM to the BCLs in his neighborhood. 8GI says the 80 meter

signs are up to par again. 8AJU wants a few schedules. Received the resignation of 8CRK because of QRW. Sorry to lose you, OM. 8DOQ is building a chemical rectifier. 8AMU is hungry for traffic. 8CYP is busy with the Army Amateur traffic.

Traffic: 8GI 285, 8DOQ 150, 8CEO 97, 8AMU 90, 8DFY 83, 8XE 84, 8BGW 51, 8AKI 26, 8CFR 23, 8EW 21, 8AJU 17, 8CRK 14, 8VE 14, 8CYP 12, 8ARC 6, 8AGO 6, 8BRC 5, 8AGQ 4, 8ABW 1.

CENTRAL DIVISION

OHIO—SCM, H. C. Storck, 8BYN—Wonderful work, gang, and wonderful totals! Congratulations, and keep up the good work. The SCM is proud of his gang this month again. Thought totals would drop after the Christmas and New Year rush was over but they are better than ever. Six of us made the BPL. Each and every one of us has just reason to be proud of Ohio this time. This is as it should be. Hope it's not just the results of the traffic contest. But the SCM knows it's not, it's the result of good, honest effort, plus consistent work and schedules. Old 8DBM made good his threat of winning the 852. Yes, he got it gang, and without any competition. The RM says no one else was in the contest. Hi. But 8DBM is to be very much congratulated for he sure worked his head off for it. Wish you would all use your Form 1 cards, not mislay them and send totals in, in letters. Of course, that's better than not reporting but use the cards if you have any and you should have. Please get your reports in on time. They are starting to string in from the 15th on to the end of the month again. Please be prompt. There have been several cases of trouble because of this, reports being mislaid, and the ORS not getting credit and having his certificate cancelled. Watch this, OMs. Don't mail reports before midnight of the 25th and not later than midnight on the 27th if you must have extra time. Also, you ORS who have a habit of not reporting because you have no totals, snap out of it. And, if, for any reason, you can't continue operation, move out of the state, or there is any other reason for which your certificate should be honorably cancelled, please notify the SCM to that effect. Also when you change QRA, please let me know, so files can be kept up to date. The RM, 8ALU, notifies me that he can now arrange for schedules almost everywhere, if you fellows will cooperate. He is working hard to help the Ohio gang and to put Ohio on the map, so please help him now. 8DBM says he would have had a good total if the weather conditions had been right and most of his schedules hadn't "flopped". 8BAU lost his tower and antenna in the high winds and is working on indoor antenna. 8BEV says that if signals don't soon get better on 40, he will refuse to believe in heaviest layer, Santa or the stork. 8DIH, also operator at 8DDQ, says their problem is to build a 1000 volt rectifier and filter for \$16. Hi. 8CFL made the BPL at last and is all elated. FB, OM. 8EFA is now swimming instructor and has plenty of time for radio. 8ALU sure is a busy fellow. 8HW is on 40 and 80 looking for traffic. 8ACY is working from 9EZ. 8RN keeps schedule with him but expects to have to get new H tube soon. 8GZ says xtal and mercury arc going great. 8CQU blew his Kenotrons again. Tough luck, OM. 8JB has good skeds and has contracted with a neighbor to handle his correspondence to branch offices by radio. Fine idea, OM. 8JB sings at WOWO, Ft. Wayne. Notice, 8UX, or perhaps the SCM can cartoon this one. Hi. 8DSY says the new xtal FB. 8AKO turns in 59 but has nothing to say for himself. 8CPQ is going great on 20-meter fone and worked oz-2SM with it. 8CMB has also been trying 20-meter fone. 8DJV also blew his H tube, but did good work on a 201-A until he got a 50. 8CNO got her filter condensers at last. 8DDK is now ORS and going good. 8AVB says traffic is light on 20. 8BNA is back at school again. 8DNL and 8BOR of Columbus are coming ORS and going good. 8AQU has nothing to say for himself. 8CXW and 8BAC are budding ORS. 8AYO is QRW with BCL work. 8OQ says traffic is nil on 20 and not much on 40. 8DQZ is QRW at school. 8PL is going on 20, 40 and 80. 8SI is on with a new outfit. We lose 8ACY as ORS. Sorry, OM. 8CLR is busy at school but was on through Xmas vacation. 8BKM is not on much because too cold in his shack. Hi. 8ARW is still busy building his new home. 8GL has been trying 20 meter fone. 8DJG is studying for commercial ticket. 8DMX worked WNP on 20-meter fone. 8DHS is having lots of trouble and busy with the new Henry.

Hi. 8AWX reports too busy to work his set much. The Akron Radio Club is now the Tuckeye Short-wave Radio Association and is going good. They did good work at the Akron Radio Show, which the SCM forgot to mention last time. 8BYN has been on 40 and 80 mostly. Tough luck with schedules and not much time on the air due to work. Also trouble with blowing filter condensers. Glad to QSO Ohio ORS any time. Here's a call for more new ORS. Please write your opinions on another traffic contest, OMs. Have you all done your part to eliminate BCL complaints? Quiet hours from 6 to 12 would be awful, OMs, and the good would have to suffer with the bad.

Traffic: 8DBM 474, 8BAU 390, 8BEV 210, 8DIH 215, 8BYN 205, 8CFL 203, 8EFA 117, 8ALU 104, 8HW 85, 8RN 84, 8GZ 75, 8CQU 78, 8JE 73, 8DSY 66, 8AKO 59, 8CPQ 53, 8CMB 53, 8DJV 52, 8CNO 45, 8BAS 44, 8DDK 32, 8AVB 30, 8CCS 28, 8BNA 27, 8DNL 25, 8AQU 24, 8BOR 41, 8CXW 21, 8AYO 18, 8OQ 18, 8DQZ 9, 8PL 7, 8SI 6, 8ACY 5, 8CLR 4, 8BKM 4, 8BAC 4, 8ARW 3, 8GL 3, 8DJG 3, 8DMX 2.

WISCONSIN—SCM, C. N. Crapo, 9VD—9DLD heads the list and says that he thinks it more important to be listed in the BPL and keep his schedules going than to enter the International Tests. 9DTK reports that his interlocking schedule arrangement gives him more than 50 stations that he is sure of and positive delivery of messages. 9EBO at Burlington is taking care of all traffic in that direction in fine shape. 9ABM says his antenna is frozen to the tin roof but his schedules are all red hot. 9BPW is working on both 40 and 80 and keeps four schedules going. 9XH-EK sends message totals but no news. 9DLQ is having better luck with his 40 meter percolator and promises more traffic next month. 9DEK is a very good station for contact with the western part of the state and QSR west. 9CDT is working on the 80 band most of the time as 40 seems to be dead after 8 p.m. 9BAW was heard in England on 80 meters using 210 in MO circuit. 9SO has been off the air for two weeks but is on the jog again and operating his MG by remote control. 9BWZ is still on the job but traffic kind of slow. 9ESM will re-enter the U. of W. this month. 9AZN says the local Radio Club at Lacrosse will be going pretty soon. 9EBT is a new station at Marshall. 9BWO is using his voltage-feed Hertz on 150-200 meters and says it works as well as on 20 or 40. 9EHM reports contact with ea-2BE using indoor Zepp antenna. 9AFZ is still trying to make a voltage feed Hertz work. 9DCX, our old friend up in the sticks, where its 40 below and ten feet of snow, manages to get his report in the mail. 9EHD is pretty busy at college but keeps three schedules. 9CFT heated the shack up and got three messages through. 9EQL is too busy putting up antennas and taking them down to get any traffic through. 9BJY had hard luck kenotrons went bad, power leak terrible, skip distance rotten, and receiver NG, tough luck, OM.

Traffic: 9DLD 219, 9DTK 277, 9EBO 211, 9ABM 155, 9BPW 141, 9EK-XH 132, 9DLQ 100, 9DEK 88, 9CDT 63, 9BAW 36, 9SO 34, 9BWZ 28, 9ESM 24, 9AZN 15, 9EBT 14, 9BWO 14, 9EHM 10, 9AFZ 9, 9DCX 9, 9DGZ 9, 9EHD 5, 9CFT 3, 9EQL 4, 9BJY 1.

KENTUCKY—SCM, D. A. Downard, 9ARU—Although a report was not received from each ORS in the state, things seem to be very lively as far as activities on the air are concerned. 9WR, O-O of this Section, reports having listed calls of 44 stations off-wave in 13 nights. FB, OM. 9AID is the new Pres. of the Northern Ky. Radio Assn. He is also a new ORS as is 9ENR. 9BCL is moving to Sioux City, Iowa, thus Kentucky loses another active station. 9ATV says he is getting ready for the relay contest. 9BWJ lost his mast during a recent storm but says he is going to add 20 feet to it when he sticks it up again. Attaboy, OM. 9BAN is trying TPTG. 9DLU is temporarily off the air until he gets a new transformer. 9DDH is putting in a master oscillator using a 201A and 210. 9DQC is on—off and on. 9BAZ says he can't reach the Aussies or Zedders but works Europe with ease.

Traffic: 9WR 110, 9BWJ 52, 9BAZ 51, 9AID 18, 9ATV 10, 9BAN 8, 9ENR 7.

INDIANA—SCM, D. J. Angus, 9CYQ—9DBA blew up his crystal the first time he started her up so is now back on the swinging sign. 9RS wants a schedule with Illinois stations on 80 meters. 9EPH, 9ESG

and 9EWQ are new stations at Connersville. 9EBH has the record for tubes going west. 9BQH will soon be thru with business college and will be on more. 9ETA is a new one at Elkhart. 9CEY is now on as 9FB at Whiting. 9DWB was quarantined out of his house and station this month. 9DHJ ops WLBT at Crown Point. 9BKJ is on most every evening 6:30 to 8:00 on 80 meters and wants skeds. 9CSC is going at Bloomington. 9ASX is rebuilding. 9CSP on 80 meters, wants skeds with Wisconsin, Ohio, Illinois and New York. 9CMV now has 500 watts going on 40 meters, 50 watts on 80 meters and 75 watts on 20 meters. 9AEB is putting in a low power set on 80. 9EYI is having good luck on 20 meters. 9CLO has a new antenna. 9CNC on fone on 20 and good luck. 9EZ at Culver Military Academy coming on with 500 watts soon.

Traffic: 9AIN 512, 9FQ 42, 9ABP 4, 9EFZ 5, 9DHM 4, 9AKD 1, 9DUZ 2, 9EKW 17, 9AIP 3, 9RS 16, 9BYI 19, 9AEB 4, 9CMV 34, 9EGE 34, 9CSP 22, 9ASX 6, 9DHJ 5, 9DBA 30, 9DBJ 11, 9EZ 38, 9CVX 9, 9EJU 17, 9BKJ 3, 9CNC 1, 9CLO 17, 9BZZ 13, 9CRV 131, 9CBT 45, 9CYQ 19, 9CLO 17, 9BHC 15, 9EMR 14, 9ARK 11, 9DSC 6, 9DWE 3.

MICHIGAN—SCM, Dallas Wise, 8CEP—SRE works a weekly schedule with nh-UC at Tela Honduras. 8BRS is changing to 20 meters for a while. 8CJ has perked up and is handling quite a bit of traffic. 8NQ has rebuilt the outfit into a self-rectified Hartley. 8AJL works the low powered wonder for a good total this month. 8BCI is our early bird and keeps a 5 am schedule. 8CWK has the stick up and says the outfit is ready for 20, 40 and 80. 8JG is busy with convention details and only handled 1. 8CHT, the South Haven High School, is getting out in fine shape and has a couple of reliable schedules. 8ZH is pretty busy and is only on for OB's. 8AMS busy with BCL outfits, hope business drops off OM so you can get time to operate. HI. 9CSI is putting up a crystal controlled outfit. 9CE has trouble working 9ANT and 9CM after dark. 8CKZ has moved up to 80 and says things are pretty lively. 8AUB says he hears more Michigan stations than ever before and is hard at work on the convention. 8DIV is going to try his crystal outfit down on 20 meters. 8CYM claims the wind blows the signals off his antenna. 8AAF wants to know why all the hurry to QRT when you have finished giving a fellow a message. 8DSF is using a Ford coil for plate supply. 8CAT is a newcomer in our ranks. (No, his name is not TOM). 8ASO has rebuilt and has things in fine shape now. 8ZF handled some WNP traffic. 8DAQ has the xtal working overtime and can be heard most any time. 9CM and 8ZF reported via radio this month. 8DED is working 18 schedules and again tops the list for Michigan.

Traffic: 8RE 34, 8BRS 58, 8CJ 36, 8NQ 9, 8AJL 27, 8BCI 26, 8JG 1, 8CHT 20, 9CSI 13, 9CE 25, 8CKZ 6, 8AUB 56, 8DIV 19, 8CYM 27, 8KN 20, 8AAF 40, 8DSF 53, 8CAT 4, 8ASO 12, 8AHM 3, 8DQB 10, 8DAS 3, 8DKX 71, 8ZF 27, 8DAQ 265, 8CEP 10, 9CM 9, 8DED 308.

ILLINOIS—SCM, W. E. Schweitzer, 9AAW—Traffic is still moving at a lively rate through Illinois. The CRTA is publishing a traffic paper which they mail out free to every station reporting in Illinois. That's an added incentive for you fellows to report. It includes remarks on the different stations, etc., and all you have to do to receive it, is to mail the SCM your report for QST. 9AAE is operating WMBI. He has rebuilt the 9AAE 40 meter xmitter and says he gets an efficiency of 61%. FB. 9AAW is working all districts regularly. 9ACU gets R9 DC reports from 4PU and is keeping schedules with 9EAA and 9EDW. 9AEG using a 210 is keeping schedules with 9EOB. 9AFA is still the contact station with WNP and is handling most of their Chicago traffic. 9APB has moved his QRA and is working sb regularly. 9AFT worked fm-16 and is still organizing the Army net stations in Illinois and the 6th Corps Area; 9AHJ heard EC and reports 9EFQ is on the air again. 9ALJ has been out of town but is back pounding brass. 9ALK reports the YL keeps him off the air but is able to keep a sked with 9BII. 9AMA worked sb-1AO. 9AMN uses a 203A and is changing his xmitter and antenna. 9AMO reports traffic moving nicely on the cross country relay route. 9ANQ is operating on 40 and 80 meters. 9APY may rip up the 40 meter outfit and install TPTG and new antenna. 9AQA was badly burned when he got across 1500 volts of DC; he's sure that if his sigs have the same kick, they sure must have some wallop. 9ASE is working many nc stations and is keeping skeds with 9APY. 9AVL writes BC articles for the

local newspapers. 9AWX almost got a glass arm calling WNP. 9BHM is going to be on soon with S tubes. He says 9DTR is using a master oscillator circuit which is FB. 9BLL is keeping schedules with 9DLD. 9BLS after experimenting with many antennas is now on with a Zep. 9BNI has a new junior op. 9BPX is using 20, 40 and 80 meters and is on every day. 9BRX is attending Armour Institute. 9BTX is on considerably despite school QRM. 9BXB is busy looking for traffic and is pounding out with a new 852. 9CCZ is working early morning schedules. 9CIA worked oc, fo, of, eg, oa. 9CKM gets good DC reports on his 310's using RAC. 9CNB is back on the air regularly with a new H tube. 9CNY has trouble pounding because the radio shack is so cold. 9CSB says traffic is picking up and DX is fair. 9CUH turned in his best report this month. 9CYN has been off because of a shift in his QRA. 9CZL says the sb stations are pounding in. 9DAF says DX very FB on 20 but no traffic. 9DBI is QRW rebuilding. 9DCK says two new hams are coming on in Lawrenceville. 9DGA has been busy with exams. 9DOX is coming back better than ever. 9DSU is working the west coast regularly with his 210. 9DXG is going to stick to 80 meters. 9EAI is looking for some schedules. 9EAJ can't make the CRTA meetings because his bowling gang meets that night. 9EGX is learning how to make chokes. 9EHH is working his outfit at the government Veteran's Hospital in Maywood. 9EJO is busy working ei-1RA and nq-2RO. He gets R6 reports from them. 9EPG is putting in plug-in coils in his transmitter. 9EPX has schedules with 1PE and 9BWJ. 9GE wants to know why an op says QSZ when his sigs are steady R8. 9IZ is getting out FB on his 7.5 watter. 9JC is putting 2000 volts on his 852 using kenotron rectification. 9KA has trouble working west but gets out FB in the other directions. 9MI-9PU keeps several schedules with the help of a couple of operators attending the University of Illinois. 9NV is now on with 2 852's and 400 watts input. 9QD is working phone on 20 meters. 9RK is teaching his YL the code, and she runs along with RK at 8 per min. 9RP has been working DCZ the Yacht Vaterland every day, getting his TR. 9UB is attending the Theological Seminary at Nashotah, Wis. He is pounding brass at 9BWO.

Traffic: 9AMO 215, 9APY 178, 9CKM 110, 9BPX 106, 9DSU 81, 9CSB 80, 9BXT 74, 9ASE 72, 9CIA 61, 9CZL 61, 9BLL 57, 9RP 56, 9EAJ 56, 9GE 56, 9AWX 55, 9AFA 54, 9BXB 49, 9EJO 48, 9EAI 47, 9ACU 47, 9CCZ 43, 9CUH 41, 9BNI 33, 9EPX 33, 9MI-9PU 31, 9NV 25, 9CNY 25, 8DXX 23, 9CZT 21, 9ALK 20, 9QD 20, 9AAW 19, 9BHO 19, 9AMA 19, 9KA 18, 9AQA 18, 9DCK 17, 9AFF 16, 9EPG 12, 9BHM 11, 9IZ 11, 9RK 11, 9DGA 10, 9CNC 10, 9AEG 8, 9EGX 8, 9AFB 8, 9BLS 8, 9ANQ 7, 9ALJ 5, 9AVL 5, 9DBI 4, 9AMN 4, 9JC 4, 9DAF 3, 9AHJ 3, 9EHH 2, 9AGG 2, 9AAE 2, 9BVP 2.

DAKOTA DIVISION

SOUTHERN MINNESOTA—SCM, D. F. Cottam, 9BYA—We are pleased to announce a new ORS—9DOP. We need all the new ones we can get and here is a new ORS all ready for plenty of skeds, so all you old brass pounders watch out for him and give him all the help possible. There will be some more cancellations very soon unless reports are received. Check up and see if you will be one of the cancelled ones. A meeting was held at 9IL's home for the purpose of checking BCL QRM caused by hams. The chief city electrical inspector was present and a very satisfactory understanding was arrived at. 9COS is all skedded up and is high man this month. 9EFK is also busting the ether, gets R8 frm oa, and an R4 from Austria. 9EFO handled some important traffic for Washington to sb and sc. 9DBC holds 4 skeds on 80. Says QRM from YLs some. HI. 9DGE is doling up his shack. His social life will get the best of him yet. 9BTW is getting out with reports of R8-9 since revamping the junk. 9BHZ holds one sked on 40. 9AIR is on all bands but handles his traffic on 80. He is constructing a 10 meter set for action as soon as permitted to use it. He is all set for the International Tests, too. 9ELA holds one sked and is QRW at school. 9CIX also keeps one sked. 9DOP, a new ORS, wants skeds. He has been QSO all USA and Canada. Watch for him, gang. 9DHP is operating at 9ERT, also keeps one sked at his own station. 9XI is short of ops since Xmas so their traffic is not so good this month.

9BKX says 40 has been dead after 9:30 pm. 9BHY is now located in this section and altho QRW, will do his best to continue his good ham work. 9GH is QSO both coasts on 20 and 40. 9DMA finds traffic almost nil when he is on after 7 pm. 9DEQ is rebuilding so will be off for a while.

Traffic: 9COS 84, 9EFK 70, 9EFO 62, 9DBC 52, 9DGE 85, 9BTW 82, 9BHZ 24, 9AIR 18, 9ELA 12, 9CIX 12, 9DOP 12, 9BHZ 8, 9XI 7, 9BKX 5, 9BHY 5, 9GH 4, 9DMA 4, 9DEQ 2.

NORTH DAKOTA — SCM, G. R. Moir, 9EFN — 9DYA has changed to 40 now. 9CDO is using 2 7½ watt tubes now and reports fine results. He also reports 9EWB a new ham in Sharon. 9BVF reports not much doing. 9BRR has been QRW most of the time. He put in a new filter and expects to put in a MOPA set soon. 9BJV has been inactive for some time but has moved to a new location and expects to be going again soon.

Traffic: 9BRR 17, 9BVF 91, 9DYA 3.

NORTHERN MINNESOTA—SCM, C. L. Barker, 9EGU—It certainly is most pleasing to hear the number of Minnesota stations on the air now, working between each other. It has been quite a while since this has been noticed, and it should indicate, to a certain extent, that the gang has subsided from the DX craze and is ready to work their neighbors. FB. A good many of the stations are working on the 20 meter band on Saturdays and Sundays which all sounds FB. Everyone seems to be getting in readiness for the Tests, and here's hoping all the Minnesota gang get their whole share of the awards and records. It is the opinion of the SCM, from 20 meter experience, that the 20 meter band is going to play a very large part in the tests, and the fellow who has a good 20 meter signal will have no small advantage. Let's go, fellows.

9BVH just got on regularly after 3 months off. 9QT had to report ND last month on account of rebuilding and crystal control. 9BMX has given up crystal for the time being, but is rebuilding his receiver using the new shield-grid tube. 9BIW, at Almora, a new ORS and a very close neighbor of the SCM, has surprised us a lot. The SCM knew there was a license held at Almora, but did NOT know that the station was active, when one day arrived some correspondence from 9BIW to the effect that he is very active on 20 meters. 9DUV is acting as relief agent at Embarras, Minn. for a short time. When done there, he will be on the air again with a new mercury arc rectifier. 9ADS has a set at his room at the U. of Minnesota. 9ABV lost his 208 on Friday the 13th. Now using a 210. 9EGF says: "Traffic moving pretty fair; plenty of QSO and lots of time." He operates every day all day. 9CKI took commercial exam at Minneapolis, and keeps skeds with several stations including WNP. 9AOK can get the best reports from DX stations of anyone we know of. He continues to work new countries till he can't figure where he finds them all. 9DPB has started working on 20 meters and says FB. 9CWA broke his arm cranking his new car so ops the key with his left hand. 9BBT is very QRW but manages to handle a few messages at that. 9EGU is on regularly working on both 20 and 40 meter bands. The 20 meter band gets better every week end. 9CIY is installing new 1500-volt tube rectifiers and expects to have pure DC. 9CWN is back at Wadena again, and is on with a 210 having kissed his 208A good-bye in Duluth where it went west. 9AKM spent most of the past month rebuilding. n4EIH visited him and gave him a good many hints and pointers that immediately enabled him to make contacts easier, and beat his old DX records. 9CTW has a new mercury arc rectifier on the way, through 9EGU, and says for the gang to look out for his kick when it comes. He will have another lower power set soon. 9BJD took commercial exam at Minneapolis and visited the Mips. hams as well as the WCCO-9WI-9XL layout. 9BMR does not get much time to pound brass, but keeps a few messages moving. 9BAY is converting to crystal control, and did some work on 10 meters but reported results poor as far as reception was concerned. 9EGN is still at U. of Minn. but operates whenever he is home, with good results. 9EHO is very busy with his work but expects to be on the air more soon.

Traffic: 9ABV 86, 9EGF 61, 9CKI 57, 9AOK 46, 9DPB 42, 9CWA 37, 9BBT 20, 9EGU 20, 9CIY 20, 9CWN 18, 9AKM 10, 9CTW 9, 9BJD 7, 9BMR 8, 9BAY 7, 9EGN 7, 9EHO 6, 9BIW 5.

SOUTH DAKOTA—SCM, F. J. Beck, 9EFN—9NM holds honor position this month having handled most traffic and the usual fine DX. 9DWN lost several skeds on account of voluntary quiet hours but shifted to AM and OK again. 9DLY bewails loss of 9DGR but is very active. 9BOW and 9BRI have a combination station at U. of S. Dak. 9DB has a xtal xmitter on 80 and 222 RF amp for receiver. 9DNS is testing antennas with no improvement over Hertz while 9AJP swears by the Zep. 9BOT complains of farm QRM and lack of skeds. 9DGR looking for another fifty. Tough luck, OM. We sure miss you. 9BKB has a 20 meter set which he claims works better without an antenna. 9DBZ and 9ETR operate on 20 mostly. A Radio Club has been organized at school of Mines at Rapid City. 9EUH has a new 210 and two schedules. FB, OM. 9DIY is having trouble persuading a WE jug to perk on 40. 9BBF is back on the air on 20 meters. 9AGL has a new Hg. arc. 9EUJ is a new station at Armour. 9ADQ fixed his xmitter up pretty and as usual, it didn't work as well. We have a fine bunch of reports this month, fellows. Now all we'll have to do is to all handle more traffic, more schedules, etc., and we will stay on top in the division.

Traffic: 9NM 78, 9DWN 28, 9DLY 28, 9BOW 21, 9DB 16, 9DNS 15, 9AJP 11, 9BOW 9, 9DGR 8, 9BKB 9, 9EUH 3, 9DIY 2, 9ADQ 15.

DELTA DIVISION

ARKANSAS—SCM, W. L. Clippard, 5AIP—We all fell down a little this month on our work, but we hope to make up for lost time. Our RM is back with us now and we are looking forward to some new things. The PB gang actually woke up and 5SL, 5IQ and 5AND are active; also 5ER, and 5ALS will be on soon. They have a get-together every Sunday PM and the rest of the gang is going to have to step some to keep up with them. FB, OMs. There will soon be three new amateurs in Little Rock, but things have been almost nil. Hi. 5JK was QRW school and maybe that was the trouble with 5AVA and 5AJY. 5SY will still be with us a while. He had trouble with his porch light imitating his sigs. Hi. Well, fellows, now that the first of the year is past, mid-term school exams are over, bills are all paid, and lots of money left, let's settle down and show 'em ARKANSAS is still on the map.

Traffic: 5SS 15, 5CK 4, 5SY 4, 5AVA 1.

LOUISIANA—SCM, C. A. Freitag, 5UX—The SCM has not been able to do very much in radio for the past month owing to a press of other matters, but hopes to be at it strong with a short time again. Some of the boys are doing some experimenting with 5 meters but so far, have not reported. Foreign stations are heard here but seldom, and we are all looking forward to an improvement in conditions. This season seems to have been the worst we have had since using the short wavelengths. 5IE reports having burned out his motor-generator and says he doesn't know when he will be back on the air. 5PM has some good schedules now and is making delivery to any town in Louisiana within 24 hours. Hope some of the others will do as well. 5NS seems to be having trouble getting a suitable rectifier for his UX-852 tube. This seems to be the only drawback when using a tube of that type.

Traffic: 5EB 6, 5NS 4, 5PM 63, 5IE 1, 5RD 5.

MISSISSIPPI—SCM, June W. Gullett, 5AKP—5AJJ will be inactive for about six weeks on account of his BC station which he is just putting on the air so have put him on the inactive list for that length of time. 5API is on the inactive list at this time but will be back on the air soon. 5ANP blew three transmitting tubes last month which is pretty good for that length of time. Hi. He is back, though. 5FQ is complaining that his note is as broad as the Miss. River so the SCM is going down and sharpen it up a bit. 5AYB has a new transmitter and receiver and says they are going FB. 5AKP is still on 20 meters and is doing considerable experimenting with different filtering systems but finds time to handle a few messages.

Traffic: 5AKP 80, 5ANP 6, 5FQ 31, 5AYB 30.

HUDSON DIVISION

NEW YORK CITY AND LONG ISLAND—Asst. SCM, J. B. Kilpatrick, 2EV—Manhattan: 2ABU is doing fine work with 8 watts input. 2BCB is putting in xtal. 2BCU is now active in Army

Net. 2BGO is a new ham but right there with traffic. 2CZR works skeds on 80 meters now. 2EV lost his antenna in a storm. 2OV is open for noon skeds. 2SC is a real relay station now.

Bronx: 2AET is a new ORS. 2AHG is QRV for Internationals. 2BAD handles traffic for nuXJJ s/s Smith Thompson. 2BEZ is out for a white ticket. 2CUX has a new xmitter using 2 852 tubes. 2JA and 2MG are both new hams in Bronx and going FB.

Brooklyn: 2ADZ is back on the air again. 2ALU is the new station of ex4DX and ex3BVA and are QSO the world with their 250 watter. 2BDM is a new ORS and wants more good skeds. 2PF has been QRV with Army Amateur contest. 2WG has been making movies of local stations. 2AVR has been QRV with exams at college so not on much.

Long Island: 2ALS just gave the YL a ring so bye bye CQ. 2AVB is going strong after moving to new QRA. 2CTP has low power going FB on 40 meters. 2HV is very much alive and working traffic schedules with ne-8AE. 2KX is back on the air after a long illness. Welcome back, OM.

Station Island: 2ABO will be back on the air regularly now. 2AFV's 852 went to sleep but he hopes to get it replaced. 2CEP is still there with traffic. 2CPG is a new station of the Staten Island Radio Club with 2AFV as 1st op and going strong.

The SCM wants to thank the gang for their co-operation this month and he is glad to see so many more reporting and our traffic total has more than doubled that of last month. FB. Let's run it up some more this coming month.

Traffic: Manhattan: 2ABU 47, 2BCB 49, 2BCU 10, 2BGO 72, 2BNL 2, 2CZR 78, 2EV 90, 2KR 10, 2OV 6, 2SC 262. Bronx: 2AET 10, 2AHG 32, 2ALP 24, 2BAD 126, 2BBX 46. Brooklyn: 2ADZ 18, 2ALU 82, 2AIZ 54, 2BAZ 5, 2BDM 33, 2BO 42, 2CCD 17, 2CRB 24, 2CTY 12, 2PF 14, 2WC 20. Long Island: 2ALS 18, 2AVB 20, 2AWQ 4, 2AYS 3, 2BSL 2, 2CTP 27, 2HV 21, 2KK 6. Staten Island: 2ABO 27, 2AFV (Dec.) 155, (Jan.) 110, 2CEP 65, 2CPG 15.

NORTHERN NEW JERSEY—SCM, A. G. Wester, 2WR-2CP has been appointed Chief Route Manager for No. N. J. and all stations should get in touch with him for any schedules or any traffic routes that are to be laid out in this section. 2CP again leads in traffic handling this month with 122 which again puts him in the BPL. Many of our stations have entered in the DX party and N.J. should bring through a few prizes. 2CW has not found time to get on the air. 2DX is back on with a new 852 with a mercury arc rectifier. 2EY is a very silent station. 2JC is stepping out to all parts of the globe. 2FC is another who finds it hard to get on the air due to YL QRM. 2KA reports better traffic and DX. 2CJD is having a hard job getting his crystal station working with a 50 watter. 2IE is fooling around with low power transmitters. 2BLM reports good results on 20 meter band. 2CTQ is all pepped up for the tests. 2CJX collects all his traffic on 80 and finds plenty there. 2BIR has a new transmitter on 20 and is now eligible for a WAC. FB. 2IS is building a short wave transmitter for WKBO, a BC station. 2AVK is having fine success with DX and is also operating 2BW in the tests. 2BBL had his license suspended for not cooperating with the BCLs. 2QI is off the air temporarily. 2ADL is maintaining a fine schedule with 3ANV in Va. for traffic. 2BAL has been elected president of the Essex County Radio Association. 2JX got a real thrill when he worked his first six. 2AQP has been practicing with a bug which he will put on the air shortly. 2GX has his WAC certificate which was all done on a little 210 on 40 meters. 2BY, our YL station, has applied for an ORS certificate. 2AAT is going to give traffic handling another try and pass up DX work. 2MD has one of the finest looking outfits in the state which is very complete and easy to look at. We welcome him as a new ORS. 2ABE has a new mast which replaces one lost in a storm recently. 2ANG is a new applicant for an ORS.

Traffic: 2CP 122, 2CW 2, 2CJ 19, 2KA 10, 2CJD 7, 2CJX 27, 2BIR 10, 2AVK 6, 2ADL 42, 2BAL 5, 2JX 8, 2AQP 28, 2GX 18, 2BY 14, 2MD 53, 2ANG 8.

EASTERN NEW YORK—2CNS is just on the air at the new location.

Traffic: 2CNS 1.

MIDWEST DIVISION

IOWA—SCM, A. W. Kruse, 9BKV—As SCM Kruse is away for a few weeks, OM 9CZC is making up this report at his request. The gang let up on traffic work a little this month. Let's all try for the BPL next month, schedules will put your total up

X

in a short time. 9CZC leads this month's totals as requested by the SCM. 9EJQ says he is on a new XC route chain. It seems to help his total, 9DZW had some of WNP's traffic and one written in Danish to Denmark. 9BKV has a list of skeds like a call book. 9EHN made the BPL without schedules. How do you manage to get that way, OM? 9CUX and 9BCA handled a nice bunch of traffic each. Iowa's YL, 9EIV, says she just handles tlc to show 'em she can. Show 'em how to make the BPL this time. 9DRA is on with 100 watts. FB. 9BAT, 9PB and 9BWN are on 40, they promise more next time. 9DOA, 9CS, 9CGY, 9CAC, 9AMG, 9AYH also ran which is better than some of our ORS seem able to do.

Traffic: 9CZC 293, 9EJQ 276, 9BKV 236, 9EHN 202, 9CUX 70, 9BCA 61, 9EIV 53, 9DRA 52, 9BAT 41, 9PB 38, 9BWN 36, 9DOA 28, 9CS 25, 9CGY 19, 9CAC 14, 9AMG 12, 9AYH 8, 9DZW 252.

KANSAS—SCM, F. S. McKeever, 9DNG—Kansas had a very poor month. Plenty of ORS reported but little traffic was handled. 9HL leads the state by a mile which is certainly FB. If he keeps this up, he will win the Traffic Trophy easily. 9AEK has consolidated with 9DNG at Lawrence and can be heard on 40 and 20 anytime. Separate transmitter and receiver are used for each wave. 9DIH and 9BLP, both new ORS of Fredonia, show good promise. 9CPY, also a new ORS, is starting out fine with a couple of good skeds. 9JU, the Assistant RM, put over some nice work when he handled the San Antonio Radio Show traffic. He is now quite active with the RM work. 9BUY is QRV business. 9CXW lost a battle and 9CKV lost a transformer so are QRT. 9CV and 9BHR of Topeka are quite active altho DX and traffic are both slow. Topeka misses 9CET who finally persuaded his YL to become Mrs. 9CET. Congrats, OM! 9BGX will off the air all month waiting for his new set. 9CFN still keeps several skeds which hold up his traffic total. 9CNT is present as usual with a nice total. He is on the air daily as is 9CFW. 9LN and 9EBM in Lawrence are on occasionally. The latter has increased his power to 100 watts.

Traffic: 9LN 19, 9EBM 6, 9DNG 26, 9AEK 6, 9JU 29, 9BHR 15, 9CFY 5, 9CNT 33, 9CKV 40, 9BPL 2, 9CFN 54, 9CFW 8, 9CV 6, 9DIH 5, 9HL 139, 9CLR 6, 9BUY 6, 9CLR 9.

NEBRASKA—SCM, C. B. Diehl, 9BYG—The Route Manager has nothing startling to report this month—schedules pretty well in hand with only a few requests and they nicely handled. The Official Observer reports the gang pretty well trained by now and only a few cases outside this section, and those mostly long CQs, otherwise in good shape. 9EJT is quite busy these days and hasn't much time to be on the air. 9ANZ says not much traffic running around loose. 9QY says weather FB for all waves now 9EEW is worked almost to death at the office and when he gets home, he just falls over. Hi. 9AWS is back on after a rest. 9DFR steps out nicely these days and says that radio weather is improving. 9DI says only time he can radio is weekends and sings because not a larger total. 9BOQ says 80 meters FB these days but traffic scarce. 9CGQ says he is leaving for a trip to Seattle Feb. 1. Here's hoping he doesn't get sea-sick from watching the ocean. 9DUH is still at his BCL work and hasn't much to say this time. 9BBS took in the Sioux Falls Convention and reports wonderful time and didn't swear when his plate transformer started for Hong-Kong. 9CDB is completely rebuilding his layout and says that by next month, will have her all wound up for action. FB. 9BQR is still having trouble with QRM, power-leaks, etc. but says it is slowly coming back to normal again. 9EBL hasn't any total this time but he hopes to have something to say next time. 9BAV is sure making things hot around Grand Island and says that he would like to be an ORS and has made application. 9AGD comes up with a nice little total this month. 9DVR again reports a very beautiful total. FB, OM. 9CJI is still knocking the spots off things and turns in another fine total; he has turned out to be a regular traffic hound. 9CIM and ex-9CBK have a quarter with a mercury-arc rectifier going now.

Traffic: 9ANZ 15, 9QY 18, 9EEW 16, 9AWS 6, 9SAWS 1, 9DFR 4, 9DI 22, 9BOQ 8, 9CGQ 7, 9DUH 16, 9BBS 46, 9CDB 12, 9AGD 10, 9BAV 34, 9DVR 26, 9CJI 45.

MISSOURI—SCM, L. B. Laizure, 9RR—The prize for consistent reporting in St. Louis is awarded to 9BEU and 9DLB. Every one of the others has missed at least one month this winter. A new station, 9BMU, reports for the first time this month. 9DUD worked Cuba on 20 meter fone. 9DOE had

a big month since his return from ship work and has arranged skeds with oa-BJK for the tests. 9BEU works all 3 bands and reports traffic moving FB. 9DLL kept a sked with the RM. 9BUL had to QRT on account of leaving for school. 9ASV is a new station in Joplin and applied for ORS. 9AVS is another new one in Jasper, Mo. 9DZP is a new one in Carl Junction. A new station will be on short-ly in Holden. Several others are in prospect in K. C. Altogether, it looks like the 9th district will soon reach the F calls if the fellows keep on multi-plying. 9DUD applied for ORS appointment. 9DKG got a 50 watter working and kept one good sked with others pending. 9BOE handled a good total. 9LJ kicked in this month after an extended ab-sence. 9ARA is working considerably on 20. 9CCQ is a new ORS. His low power set is reported QSA everywhere in the U. S. 9CDF had to move to keep up with his job and is QRT. 9LI got his report in by Western Union and says he was heard in Eng-land. 9DAE kept 6 skeds and handled the record number of msgs, for the state, besides handling a lot of RM duties. 9DMT was unable to be on much but got a few msgs. 9ZD is absent this month going east on business. 9DQN moved and is just getting back. 9ACA will move again shortly. 9BSE reports all kinds of troubles on 40 meters. He is not alone for the SCM has worked a number of fellows all over the country who said the same. 9WV is on regularly. 9RR had a very good traffic month. He gets better DX out of a 210 than he did on two 50 watters last winter on the same wave. 9ZD will bring a Bu. Stans. calibrated oscil-lator home on his return from Washington. 9EMH did considerable DX this month. 9DLL has a 222 receiver. 9LD and 9DEF are combining and will put up a big station near Overland Park, Kansas. 9AHZ has a jug ready for the tests. 9ENU works a sked with 9DKG every Tues, Thurs. and Sat. FB, OM.

Traffic: 9BEQ 52, 9DOE 200, 9BMU 7, 9DZN 32, 9DUD 18, 9BEU 28, 9DLB 50, 9ZK 45, 9EHI 40, 9BOE 31, 9BUL 48, 9DKG 80, 9LJ 15, 9ARA 28, 9CCQ 47, 9LI 20, 9DAE 324, 9DMT 5, 9CRM 168, 9BSQ 4, 9RR 188, 9DQN 10, 9AYL 16, 9DMB 10, 9EYT 4, 9ZD 8, 9AHZ 4, 9ENU 129.

NEW ENGLAND DIVISION

MAINE—SCM, Fred Best, 1BIG—1AIT has re-turned to the 80 meter band with a new set and a mighty wallop! Welcome back, OM. 1BFZ sends in his usual good report. He says he has been trying to get down on 20 but it has not proved as easy as it sounds. Hi. 1CDX informs the gang that he has been handling some worthwhile messages for 1AWQ. OM Garcelon at 1AWQ sends 1CDX orders for groceries each day at six pm and the groceries arrive promptly in time for dinner the next day. 1FP reports that the Queen City Radio Club is having many good meetings this winter, and that at the last meeting, 1BFZ had a birthday party, the club members presenting him with a cigarette case with "1BFZ" engraved upon it. Wish we had more clubs of this type in the ole Pine Tree State! 1AQL sends in his usual fine report. He says that the Queen City Radio Club is doing some fine work in clearing up the BCL QRM problem. 1QY is working hard to get a real Army-Amateur net work-ing in the state of Maine. Give him all the help possible, fellows, as this sort of organization would go over big in time of emergency such as be-lief Vermont not long ago. 1BKO and 1MT are living real close to each other now, 1MT having moved, and both are getting out well. They are interested in USNR work and copy all drills from NRRRA, regularly. Let's have a traffic report from both when Feb. 25 rolls around, OMs. 1ABV has a new re-ceiver under construction which promises to out-do anything he has had to date. He is on 80 meters almost any night and wants to tie up with all of the gang possible. 1ATV has been appointed a Unit Commander in section 1 of the USNR. He invites all inquiries relative to enlistment in his Unit so shoot 'em at him, gang. 1BIG is getting ready for the Feb. Tests. Here's hoping he has better luck than he did last time. Attention of the Maine gang is invited to the fact that a real honest-to-goodness Maine Convention is now being planned for Augusta, the latter part of June, 1923. It is hoped that every ham, as well as ARRL member in Maine, will make every effort to be present.

Traffic: 1BIG 205, 1AIT 54, 1BFZ 44, 1CDX 37, 1FP 27, 1AQL 22.

RHODE ISLAND—SCM, D. B. Fancher, 1BVB—Not much to report this month as things have be-come dull in the way of traffic in this state. Busi-ness and other things too numerous to mention are keeping the gang off the air. 1AAL seems to be the only one that is handling any traffic to amount to anything and he keeps a bunch of schedules to help him out. 1CKB says, "Not so good this month." 1BL hasn't been on much for some reason or other. 1MO has been QRV with business. 1AQF says that DX is good and is using a mercury arc rectifier. 1BAT says he never noticed so little traffic on 40 until he QSYed to 80. Hi. 1AWE is still the DX wonder. He is keeping a schedule with eb4AU daily. FB, OM. 1BLS in Newport is getting better all the time. He is a new station but rapidly coming up in line. 1BQD's Form 1 card was lost in the mails so can't report his traffic. He is doing good DX again after a few changes in the xmitter. 1BVB has shifted from the Hartley circuit to the TPTG and it sure is FB. Much better DX and a steadier signal.

Traffic: 1CKB 2, 1BL 6, 1MO 10, 1BLS 14, 1AQF 20, 1BAT 24, 1BVB 26, 1AWE 24, 1AAL 71.

EASTERN MASSACHUSETTS—SCM, E. L. Battey, 1UE—Nearly all ORS reported this month but some of the reports received were very small and hardly worthwhile. There are several stations which have been reporting but handling only one or two mes-sages or none at all per month. This is not the right work for an ORS to be doing and the SCM wants to warn those fellows at this time that un-less they show more signs of activity within the next two months, he shall have to cancel in order to keep the standard and value of an ORS ap-pointment high. 1AIR and 1CJR were cancelled this month, the latter because he has moved to QRA where he cannot use his transmitter. 1CMZ has applied for ORS. 1FL leads in traffic with 1CRA close behind. 1FL is still working with WNP and some of the other expeditions. 1CRA is doing great traffic work and is in a chain extending from Hart-ford to the west coast. Try routing your traffic that way, gang. 1ACH explains the drop in his total by the fact that he has rebuilt the whole works. The RM, 1KY, is doing her work earnestly and is bring-ing about effective results. 1AKS, 1MR, 1BMS have been to sea as ops. DX still has its charms for 1ABA, 1NK, 1RF and 1KH, who together with a big bunch of other DX kept a sked four consecutive weeks with ec-AAZ. He also handled some foreign traffic. 1WV worked nice stuff and had visit from Don and Dick of 1FL. We have the usual group who have been rebuilding, etc., among which is 1AVY, 1NQ, 1NV, 1BKV. At the advice of the Prof., 1GP is putting his attention to his studies more than ham radio. 1AXA is kept busy at WBZA while 1BVL sees enough radio during the day at Brown-ing-Drake. 1BVL worked 9BAF on fone on 20. 1APK is suffering from YLitis. Hi. 1RY is at new QRA. 1PB handled little local traffic. 1AAW worked an Aussie and pushed a few msgs. School is still QRM-ing 1BDV. 1YC wants some schedules—don't rush them gang. Hi. 1RL and 1UE are taking part in Naval Reserve drills from NRRRA. If any of the gang wants to get in on these, write T. R. Penny-packer, Prescott St., Cambridge, for dope. The E.M.A.R.A. holds its meetings the first and third Wednesdays of the month at the Commonwealth Armory, Boston—everyone welcome. 1SL keeps the Army net going in the district and handles bunch of traffic in connection with same. 1LM says traffic fell off during last of month but no one would guess it by his total. 1ASI is doing his party of traffic work and has two newly acquired skeds. 1ATO, non-ORS, sent in report. FB. Some of the fellows are entered in the International Contest and we hope that Eastern Mass. comes out on top. If you have any suggestions or criticisms write the SCM.

Traffic: 1FL 499, 1CRA 481, 1LM 287, 1AKS 288, 1KY 127, 1ACH 109, 1WV 31, 1APK 36, 1SL 28, 1RY 26, 1ASI 25, 1PB 24, 1KH 23, 1ABA 21, 1ATO 11, 1AAW 3, 1RF 6, 1YC 5, 1NK 4, 1GP 4, 1UE 3, 1NV 2, 1BCL 1.

NEW HAMPSHIRE—SCM, V. W. Hodge, 1ATJ—Traffic has been rather scarce this month. 1AEF handled a big bunch. He and 1IP are planning on joining the Naval Reserve. 1AOQ is still rebuilding. 1AOV is leaving for Boston, so won't be on much. 1BFT-1CAN pounded out a few between initiations and exams. 1AVJ is doing a little DXing. Our RM, 1IP, reports not much traffic even tho he keeps 5 schedules daily. Most of the N.H. stations are

located between 75 and 77 meters in the 80 band. 1ATJ and 1BIG are handling considerable Naval Reserve traffic. The SCM reports a new Junior op at 1ATJ. He will be helping with the traffic soon. WNP was worked recently on both 20 and 80.

Traffic: 1BFT-1CAN 187, 1AEF 169, 1ATJ 161, 1IP 110, 1AOV 37, 1AVJ 18, 1AVL 8.

VERMONT—SCM, C. T. Kerr, 1AJG—Things sure are rolling now on 80 meters with the active stations having schedules, messages are getting real attention. The traffic totals took a considerable jump. Our CRM, 1IT, again too high wood with 67. 1FN is QRV for the tests and offers two big 45 volt B batteries to the Vermont ham scoring the highest. Go to it, boys. 1ATU is entered and we trust there are more after the prizes. He is QSO 20 and 40 meter bands. 1EZ, our only active southern station, is on regularly on 20, 40 and 80 meters. 1BD went and did it, yep, got married, congrats and is QSO in Barre. 1BBJ rolls real and is QSO all the time and works on skeds FB. 1BJP is on 79 and 1RW but hits out traffic just the same. 1BEB keeps his skeds with his usual regularity. 1BIQ has gone and engaged himself to 1YD and someone else. Congrats, OM. 1NH is a new ham in the south with 1EZ. Pownal is on the air with low power and we want to hear more from him. In the reports this month, the regulars report quite a few NEW stations starting up in the state and the SCM would be tickled to get in touch with these boys or put them in touch with hams near them for their mutual benefit. Let's hear from you new hams.

Traffic: 1IT 67, 1BEB 31, 1BJP 33, 1BBJ 17, 1EZ 17, 1ATU 10, 1AJG 43.

CONNECTICUT—SCM, H. E. Nichols, 1BM—The reports of this month would seem to indicate that the largest amount of traffic is being handled by the stations who have made their plans to work certain other stations on definite scheduled time basis and in this way, have attained a real degree of success. Your SCM certainly appreciates the spirit of team work that is becoming more and more evident and hopes it will continue. 1PE, 1CTI, 1VB and 1BJK have been covering the southern part of the state in fine shape, and with 1AOI and 1BBC at the eastern outlet, things have kept moving. With the appointment of 1AOI as Asst. RM in Hartford, Tolland and Windham Counties and the new equipment at 1MK, the quantity of traffic going through the state should be greatly increased. 1BHM, RM, reports considerable local activity and several new stations getting ready to come on the air. 1BJK reports that things are booming in the Army-Amateur game and that he is keeping 17 schedules weekly. 1ZL still insists that his little 210 is good yet by reporting that he worked all districts, Porto Rico, Honduras, England and Belgium. 1VB, 1CTI, 1MK and 1BBC have real cause for rejoicing in the fact that they made the BPL. This indicates real work on the part of these stations and we are proud to report their achievement. 1ASD reports handling 16 msgs with 6VB which is very nice work. 1AFB has been working 20 meter band so as to be all set for the big International Test and is working hard to win a WAC ticket. 1OS worked ns-1FMH with 200 volts on the plate of her transmitter and hung up his first DX record for her station. Not so bad for our YL op.

Traffic: 1TD 2, 1ADW 3, 1BQH 3, 1TAG 6, 1BGC 8, 1OS 10, 1BMG 11, 1AMC 13, 1BM 19, 1VE 21, 1BHM 30, 1NE 30, 1IM 34, 1ZL 36, 1BWM 51, 1AFB 61, 1BJK 72, 1ASD 100, 1MK 104, 1PE 164, 1VB 209, 1CTI 218, 1BNS 17, 1AMG 27, 1BBC 253.

WESTERN MASSACHUSETTS—SCM, A. H. Carr, 1DB—1AJK has been on the air every week with the Naval Reserve station here. 1AJM is complaining that one station on the 20 band are not staying where they belong on the upper end of the band. 1AKZ is going in on the tests but says QRW skating. 1AMZ handled traffic some of his vacation and will be on the air again on the next time he has off. 1ANI has joined the Army Net. 1APL is still going on the job and took the honors again this month in the section. 1AZD says that there are quite a few potential hams blooming in Pittsfield. He says that 1CLN, 1ARE and 1VC are practically inactive. 1BSJ says he has been out with the gang on broadcast complaints, and that 1BWY is in the midst of construction. 1BVR has a Mueller 30-watt working fine now on a new inductance. The new operatrix at 1ASU's must be keeping Mr. and Mrs. busy because we do not hear much from that quarter now. 1GR is going to change his QRA and says

he has worked quite a bit on 20 and 40. 1BCU, our old friend Steve of Chinton, has started up again and gave us a good report and also called on the SCM a while ago. 1UM says that the Worcester Radio Association has just held the annual election of officers. 1WQ sends in a fine report and says that he and his YL played checkers with 8CJ. His YL wants to play checkers at the key with anybody who thinks they can beat her.

Traffic: 1AJM 40, 1AKZ 4, 1AMZ 17, 1ANI 89, 1APL 169, 1AWW 12, 1AZD 58, 1BVR 3, 1DB 20, 1EO 8, 1GR 1, 1BCU 42, 1UM 19, 1WQ 68.

NORTHWESTERN DIVISION

MONTANA—SCM, O. W. Viers, 7AAT—7AJU at Miles City is a new ORS and copped the traffic honors this month. He had a FB chat with WNP on 80 meters for an hour and ten minutes and reports no fading on either end. 7DD ranks second and says he is getting ready for 10 meters. 7FL handled a few and worked oz-1FE. He reports that 7JX, the Butte Radio Club, is on the 40 meter band after 11 pm with 5 watts. Please give them a call, gang. 7EL says radio weather is rotten at Stevensville but manages to kick through in fine shape. More power to you, OM. 7AFM keeps schedules with 9AKO and 9CXE and is on from 9 to 11 pm. Help give his traffic total a boost, gang. 7AAW, another new ORS at Bonner, has been on the sked list but will be going full blast soon. 7AHG has been having rotten luck with 74 and 5 watts so says he'll make a 201A or 199 do its stuff. 7RG at Broadway, has been blowing things left and right but still has hopes. 7OW is a new station at Luther using a 199. Please listen for his DC sigs. 7AAT-QT installed a new 852 but is disappointed with the way it acts. A MOPA set will be heard from the SCM. He sure needs it, too, the way the wind has been flopping the antenna around. 7DD, 7FL, 7AFM, 7EL, 7AAW and 7AAT are all ORS.

Traffic: 7AJU 32, 7DD 25, 7AAT 15, 7FL 8, 7EL 7, 7AFM 7, 7AAW 2.

OREGON—SCM, R. H. Wright, 7PP—Activity reports for this month have been splendid, especially those from out of town stations. 7KR now has a mercury arc and Zep to put his 250 on the air, getting R7 reports from oa. 7RJ is rebuilding his 50 watt set and will be on soon. 7IQ is on with an H tube. 7JE kept his 352 warm Xmas vacation. At present he is using a portable at Corvallis. 7DP is on with an 852 and mercury arc. 7PL is using an advance sync for two 203A's and is having great success with it. 7ABH is QRV school so has not been on as regularly as usual. 7AIX has moved up to 80 meters. 7ALK is on regularly but says his filter condensers have a bad habit of burning out. Key clicks and BCLs don't mix says 7FU. 7EO is remodeling to remove key clicks. 7AEK is on with his 250 regularly but has resorted to 6EX rectifying tubes with a heavy filter instead of his sync. 7HV is a new amateur at Toledo using a 210 tube with 350 volts of B battery. 7PE, using a 210, is on regularly, ready to chew the rag, take your traffic, test, or what have you? 7AGC is still QRV school but moves traffic occasionally.

Traffic: 7PE 66, 7FU 50, 7AGC 22, 7EO 15, 7ALE 11, 7PL 10, 7GQ 8, 7AEK 7, 7AIX 5, 7HV 4.

WASHINGTON—SCM, Otto Johnson, 7FD—7MG is high traffic man with 7EK, 7DF and 7BB taking DX honors. 7MG-7BB-7ACA-7LZ and 7GW are new active ORS. 7AU has failed to report since he received his ORS. Cancellation is the result. 7TZ is the proud daddy of a boy, another ORS coming up! 7TJ celebrated by shooting his fifty. 7AGE is now in Spokane. 7VL is RM of Spokane. 7AFZ and 7AFO are active stations. 7GW, formerly of Idaho, is now at College Center, near Walla Walla. 7TX is still active. 7DF is having rectifier trouble. 7ACA has been doing good work. 7AFQ handles much traffic. 7KO, 7US, 7AEV and 7OK and many other stations are keeping Seattle traffic moving.

Traffic: 7MG 287, 7ACA 73, 7AFZ 56, 7BB 54, 7KO 31, 7AFO 29, 7AFQ 27, 7VL 27, 7AEV 21, 7GY 16, 7LZ 14, 7DF 13, 7GW 11, 7EK 11.

IDAHO—SCM, H. H. Fletcher, 7ST-ALD — 7QA holds his ORS by leading the state this month using a couple of 301As. 7JF blew his 50 but comes in second. He has a raft of skeds and works on 20 and 40. 7HK is a new ORS and holds regular skeds with 7AEC. FB. 7QC is on 40 and 80. 7AJQ is

trying TGTP. This month, Mr. Redeker, who for the last 11 years has been T. O. M. of 7YA-XI-KFAU left us to go to the Federal Telegraph Co., at Palo Alto, Calif., where he will do research work. We will certainly miss him but hope to hear him on the air soon. Good luck from the Idaho gang, OM. 7AGU has taken Mr. Redeker's place as Director and 7SP-ALD came back from Jerome to accept the job as asst. director. 7YA is now rebuilding into a Colpitts. 7JW didn't get back from college soon enough to send in his report. 7FB started reporting this month. Good stuff.

Traffic: 7IY-QA 78, 7JF 65, 7HK 38, 7QC 33, 7FB 11.

PACIFIC DIVISION

L OS ANGELES—SCM, D. C. Wallace, 6AM—6BSN and 6DKX are the only ones that made the BPL this month. 6BSN sends in his first report this month and has just received his certificate. He has been out at sea, but is back and has started in the radio business in Fresno. 6DKX kept no schedules this month on account of the poor operating conditions on 40 meters. 6ZBJ says there are more reliable stations on the air now than have been for years, and traffic gets through more quickly and surely. 6QL is organizing an USNR unit and has enrolled seven already. 6AM worked 10 countries in one week. 6CQP has applied for USNR. 6DCH keeps a sked with Tuscon. 6AKW ran test on four wire cage and brass tube 32 ft over all from transmitter and using same counterpoise. 6BVO is keeping daily schedule with stations installed for Southern Sierras Power Company on the Northern Division. 6ABK keeps some good daily skeds. 6BTS is having trouble with a new 50. 6CUH got stuck in the mud on the way home from the ARRL banquet at Pasadena and was pulled out by 6BVV and stayed overnight at his shack. 6BZO says DX has been rotten, QRN terrible, had power leaks and lost all skeds. He sends in a good report, however. 6DEG is very enthusiastic about the shield grid tube. 6BJX's total includes December 27th only, as he is off the air until he can regain health. His P.I. sked of 26 months duration necessarily broken. 6BXD now on at new QRA, as he got married—first report in new QRA (6BJX at key). 6CHT put in new RF chokes as described in "X" Section and it sure made set perk better. 6AWQ had visits from 6ALZ, 6DCK, 6TJ and 6CRZ. 6CRZ is now chief telegraph operator at Rialto, Calif. 6BZR is graduating from high school this month and has been plenty busy. He handled a message from the east coast tracing a man. 6AGR worked KFUH who is in the harbor at San Pedro. 6DGT says his soup played out but is getting another ready for the coming DX tests. 6BFP has been very busy with business, and conditions are very poor up his way. 6COT rebuilt during the month. 6ALZ has been off the air on account of burning out his grid leak. 6ALR has been building sets for BCLs. 6SJ says housewiring soaks up most of his signals. 6CMQ is back at KPPC as chief operator. 6BVM says no DX for quite a while. 6CZT moved and has a power leak that kills reception four nights out of seven. 6BHR purchased a new RCA 50 on the first day of the new year, thus starting out right. 6CNJ was off the air nearly all month on account of work. 6ID has bad interference and doesn't think he will be able to participate in International Relay Tests because of it. 6CLK has started up in business, and has not had much time for his radio. 6PY has been away from home and has not been able to be very active. 6BVT and 6AIO report as usual. 6KB got married. Hi.

Traffic: 6BSN 248, 6DKX 107, 6ZBJ 80, 6QL 77, 6AM 70, 6CQP 65, 6DCH 55, 6AKW 53, 6BVQ 53, 6ABK 53, 6BTS 47, 6CUH 45, 6BZC 45, 6DEG 38, 6BJX 32, 6CHT 30, 6AWQ 26, 6BZR 18, 6AGR 18, 6DGT 17, 6BFP 16, 6COT 12, 6ALZ 12, 6SJ 10, 6CMQ 8, 6BVM 7, 6CZT 7, 6BHR 5, 6CNJ 3, 6ID 2, 6CLK 1.

SAN DIEGO—SCM, G. A. Sears, 6BQ—6EC leads the Section this month and more than made the BPL. He keeps daily skeds with op1CW and nn1NIC. 6BAM had the second high total this month. He has been working on 80 lately and reports lots of traffic there. 6BQ is on the road most of the time. He has been working all bands with his 40 meter zep antenna. 6BYX has things in Orange County humming again. He expects to take the com'l exam soon. 6CNK has a dandy total this month and maintains several skeds. 6AJM, RM San Diego, has completely rebuilt, using TPTG and Ceco 81 tubes for rectifiers. He has 5 new skeds now and says traffic will pick up next month. FB. 6FP is busy

as a bee with other people's QRM. Recently he located a bad power leak in La Jolla and 6BQ will be happy when the gang makes the repairs. 6BWI has the TPTG craze now and is rebuilding. 6DAU expects to be shipped out of San Diego again soon. Sure hate to see you leave, OM. 6ANC plans on going to 80 meters soon. KGEN still kicks out all over the U.S.A. 6DGY has been experimenting and rebuilt three times last month. Hi. 6BAS also is making lots of changes. 6BFE plans on going to 80 soon. Lots of the fellows are putting in 281 or Ceco 81 tubes for rectifiers, 6AJM, 6DGY, 6BWI, 6BQ and several others have changed over and junked their chems. Several of the old standbys did not get their reports in on time this month. Come on, gang, help us boost our totals and put San Diego in first place. We need your report to do it.

Traffic: 6EC 91, 6BAM 68, 6BQ 64, 6BYZ 58, 6CNK 51, 6AJM 23, 6FP 19, 6BWI 16, 6DAU 16, 6ANC 12, 6DGY 7, 6BAS 7, 6BFE 4.

SANTA CLARA VALLEY—SCM, F. J. Quement, 6NX—6AMM kept the op1HR route hot this month with a total of 409. It is a pleasure to listen to these stations handle message after message with commercial accuracy and far greater speed. 6BMW sent plenty of 00 cards out this month and what excuses they give for being off wave! Write him for schedules. 6BYH wants a sked East and one in L. A. also north. 6BNX under heavy QRM from school handled many important messages. 6BAX, a new ORS, is another station getting good results this month and was busy cutting and trying to get the ideal one. 6AOD, a new ORS, and 00, reports 40 meters dead but picking up towards the end. 6CTE experimenting on 20 meters. 6CJD was transferred on business to the south and will be off the air for a time. 6AJZ promises to be on the air more often now. 6CSX is moving his station and hopes to be on the air next month. 6MP worked 6BB at U. C. It was very gratifying to note an almost 100% report this month as the traffic totals will show.

Traffic: 6AMM 409, 6BMW 58, 6BYH 58, 6BNX 34, 6BAX 24, 6BCH 9, 6AOD 6, 6CTE 4.

EAST BAY—SCM, P. W. Dann, 6ZX—Reports are rather few this time, fellows, but believe it is due to the erroneous impression that the East Bay Section was without an SCM, so until further notice, please send reports to the old SCM who is acting until a successor is elected. In all events, all report cards received will be taken care of properly. Activities in the neighborhood of 20 meters are on the increase, as several of the gang are working East Coast at noon and even 6ZX himself has fallen for it and says great stuff. Let's hope 10 meters proves as good.

6BUX is very busy at college but sends in a report, which is more than some of the gang do. 6CGM says lots of traffic this month and more next. 6RJ comes second with reports of working Pacific Cable Station vq1AJ who says he wants to QSO nu hams. 6CTX is a reliable traffic station and a new ORS. 6IM is on with 900-1000 cycle note and you should see the DX worked by this station. 6ALV says busy and hasn't done much traffic handling. 6CKC is too busy printing QSL cards for the gang so not much traffic. 6AFT has changed his QRA to 3519 Lakeshore Blvd., Oakland, so hasn't had much time to handle traffic. 6CZR is changing his QRA and expects better results there. 6ZX has been operating considerable lately but no one seems hot for traffic.

Traffic: 6CGM 56, 6RJ 56, 6CTX 22, 6IM 17, 6ALV 12, 6CKG 6, 6CZR 7, 6BUX 3.

Arizona—SCM, D. B. Lamb, 6ANO—Wow! Only five reports received this month. Where are the rest of you? Next month every ORS who doesn't report gets his ORS cancelled! This is your last chance! 6BJF is building a power transformer for 6BPL at Roosevelt, Ariz., and receiver for x9EH at Coolidge Dam. 6CRA, 6DTU are two new fellows in Phoenix. Ex9ADI is located in Phoenix and will soon be on with 250 watts. Glad to have you with us, OM. 6DCQ is working FB and still uses the 50. 6BWS reports being on very little, QRM from high school play and of course, YLs, is the reason. Hi. 6DRH still going good on 40 and 80. 6DIE is heard pounding with a good wallop. 6CAP is still using an 852. 6BHC is getting good DX.

6ANO gets out FB with 50. 6AZM still on with Mo. O. says only thing.

Traffic: 6DRH 174, 6BWS 50, 6CAP 27, 6DCQ 14, 6BJF 22, 6ANO 102.

HAWAII—SCM, F. L. Fullaway, oh6CFQ—This report by radio from oh6BDL and nu6AD—6AVL's DC works about the same as RAC. Gets no nu stations after 6 pm. 6BDL is on and off on 40 and 20 meters. He is now a WAC. 6DJU still gets out. 6DCU burned out and rewound power transformer, then antenna current went up one ampere. Guess he'd have burned it out more if the fifty hadn't gone kerplunk instead. 6DPG is on when he isn't bothered with school QRM. 6DEY is off for a while. Local QRM on 40 is driving him down to 20. Kindly send all reports to SCM 6CFQ, given on page 3 QST. This report was written by your old SCM, oh6BDL, for OM Fullaway.

Traffic: 6AVL 148, 6BDL 93, 6DJU 68, 6DCU 22, 6DPG 9, 6DEY 8.

EAST BAY—SCM, P. W. Dann, 6ZX—6EY reports being QRW and not very active. 6COL says there is no traffic on the air and eastern stations fade out completely after 10 pm. 6CLZ is very QRW at U. of C. but operates occasionally at the Radio Club, 6BB. 6AMI says 80 is better than 40 at present as far as east coast QSO's go. He bought a second hand H tube but doesn't know how it will work. 6BUX reported QRM from exams. He expects to be on good during the contest. 6BZU is thinking of putting in more power. 6BPC thinks we ought to discourage AC on our new bands as it's too narrow.

Traffic: 6EY 3, 6COL 8, 6CLZ 3, 6AMI 50, 6BUX 3, 6BZU 59, 6BPC 28.

NEVADA—SCM, C. B. Newcombe, 6UO—6BTJ will be off the air for an indefinite period. 6LB still sends the weather reports to 6UO. 6ABM was off the air all month. He has been working on a new screen tube.

Traffic: 6ABM 10, 6UO 10, 6LB 3.

ROANOKE DIVISION

NORTH CAROLINA—R. S. Morris, SCM, 4JR—40C is working plenty of DX. 40H says he changed YLs and thus increased his traffic; guess everybody better try that. 4TS says little doing. 4DQ would like to use 80 but hasn't room enough for larger antenna system. 4SJ is closed for repairs. Will be on February 1. 4AB says he tried to break last month's record but failed due to sickness; better luck next time, OM. 4DB is back on the air with two 210s. 4VH has been remodeling. 4HV says he has trouble keeping WNP tuned out. 4EC has two new 60-foot masts and 100 watts—should stir 'em up on international tests. 4JR is trying to get on more but can't get needed schedule with Florida.

Traffic: 4AB 43; 4DB 23; 4VH 12; 40C 12; 40H 12; 4EC 10; 4JR 9.

VIRGINIA—J. F. Wohlford, SCM, 3CA—3CEB handled important traffic from Philippines to Washington. Had some fairly good DX QSOs. 3ANB and 3EC at Fort Monroe, Va., are both active, new stations. 3KU continues to reach out and handle traffic. Has gone into the 80 meter band for this work. Has had good DX QSOs. Member BPL. 3TN on occasionally but QRW BCL repair work. 3JT works fairly consistently, with 3II as second operator. 3FL is a new station at Portsmouth and more of them coming. 3WM is star DX station having five continents to his credit, 20 watts input to lone 210. 3CEL has been checking off wave stations most of time but finds time for rag chewing and handling a few messages. 3ALS with two 210s RAC works west coast and QSO EI station. 3NM-DL has arranged several skeds and we expect to see a big traffic report next month. The station started the New Year off with a bang, blew two five watters already. 3EI handled two messages and blew his tube, rebuilding now. 3AG continues to handle traffic and reach out for DX working 27 countries. 3AFU is a new station with a 210 on 80 meters. 3AAI with xtal control on 80 meters is reaching out, works WTFP when not hamming around. 3BGS continues to reach out and gather in a few messages. 3CKL is now working xtal on 88 meters, says best transmitter ever had. 3BDZ is still trying get the xtal to perk on 80 meters. ORS for 3BZ hereby cancelled for failure to report on time and three misses in a row. WOW!

XIV

Traffic: 3KU 204; 3CEB 63; 3EI 2; 3AG 17; 3BGS 28; 3NM 14; 3CKL 18; 3CA 177.

WEST VIRGINIA—SCM, C. S. Hoffman, 8BSU-8HD—Several active stations failed to report this month. 8ACZ started with 67 messages, holding schedules with 12 stations. 8VZ operates at 8SP, but did not report. 8AUL reports working EK, EB, EF and NR. 8DPO put in higher power and ought to get out FB. 8HD works 4KF on schedule three times weekly. 8DES is on week-ends. The wind blew the mast down at 8DCM. 8BJB worked ef-8CC. 8DPO and 8DEW are new ORS. There should be more reporting of activities.

Traffic: 8ACZ 67; 8HD 15; 8CNZ 12; 8DPO 9; 8DCM 6; 8AUL 5; 8BJB 5; 8DNN 1.

ROCKY MOUNTAIN DIVISION

COLORADO—SCM, C. R. Stedman, 9CAA—9EAM walks off with the honors for this month making the BPL, too. FB, OM. He was slowed down considerably by a blown high voltage transformer but you can't keep a good man down. 9DQD did the best DX this month that he has had so far in his career and is satisfied that it pays to experiment. 9CAA was unable to get so much thru due to being tied up with KFXF in addition to his regular job but has several schedules going in fine shape and reports two new stations there. Keep it up and there will be more in Pueblo than Denver. 9CDE has kept a schedule every Sunday with 9EAE at Trinidad for the past 6 years without a miss. 9EEA says his house is quarantined with scarlet fever and so he is nil. 9CDW is QRW school. 9CCM is on regularly and says she is getting out fine.

Traffic: 9EAM 226, 9DQD 54, 9CAA 49, 9DQV 36, 9CDE 34, 9ENM 23, 9CCM 7.

UTAH-WYOMING—SCM, D. C. McRae, 6RM—But very few stations are active this month so the traffic total is rather small. A great many of the fellows were very busy with school work at the mid year, and, of course, could not spend much time for radio. We look for a bigger total for the coming month. 6BAJ a new ORS managed to push a few thru; 6DPJ and 6DPO both new ORS at Provo, Utah did some fine work this month and we hope they will keep it up FB. 6RV was on a little altho QRW from school work. 6AIK up at Ogden still remains the only active station up there and is operating on 81 meters. 7GR was the only Wyoming station active this month. 6CQL has made the fatal mistake and will be under "crystal" control before long now. Congratulations, OM, and we hope the set won't be off the air too long. The SCM certainly appreciates the way the gang have cooperated with him while in office and is sure sorry that it will be necessary for some one else to take his job over but hopes the fellows will get behind the new SCM and help him put over the Utah-Wyo. section.

Traffic: 6DPJ 47, 6DPO 134, 6AIK 9, 6BAJ 5, 6RV 6, 7GR 9.

SOUTHEASTERN DIVISION

FLORIDA—SCM, C. E. Ffolkes, 4LK—The SCM is very glad to see the fine bunch of reports this month. We were honored this month with the presence of Mr. Hebert of the Hdq. gang who came down to attend the Miami Convention, afterwards going over to the inspection of the Naval Reserve Station, 4ACM, in Tampa. The SCM would certainly appreciate it, fellows, if you would send some news and gossip along with your traffic reports. It is a great strain on our brains to dig up the news. Hi. From the looks of 4CK's report every month, I am wondering what the WU does for business. 4BL assisted friend Cupid this month in Lakeland. Hot stuff, eh? Have you heard 4MS's new portable call, 4PAA. 4RK is interested in the Jax YLs. 4BN handles some high pressure business msgs with 4IE. Moving the shack has kept 4IE QRW lately. 4TR is pushing Naval Reserve traffic out on 81 meters. 4TK would like a sked with nn1NIC but works DCZ. You should see 4LK's automatic rectifier filler. Hi. 4ACZ has been quite sick this month. Tough luck, OM. Sure glad to hear from 4ABJ who is also 2nd op at 4MS. Come in every month, OM. 4AY is the end of the Fla. Section. Hi. 4HY handles some traffic for fQPM this month. 4KC says the QSL cards are getting

QST FOR MARCH, 1928

better now days. 400 says he got the low down on the YLs from epIBE. Hw? Conditions been all to the dogs says 40B. 4VR sure shoots the breeze up on 80. Would like to hear from any station interested in becoming an ORS.

Traffic: 4CK 147, 4BL 70, 4MS 42, 4RK 39, 4BN 30, 4IE 29, 4TR 19, 4TK 18, 4LK 14, 4ACZ 12, 4ABJ 11, 4HY 6, 4KR 6, 400 6, 4OB 5, 4VR 7, 4AY 8.

GA-SC-Cuba—SCM, H. L. Reid, 4KU—The SCM had a wonderful time at the Miami Convention. Mr. Hebert, "The good will flight from Hartford" was there with all the dope and injected more pep in this section than has been done before. The Florida fellows are jammed up and certainly are to be congratulated, for the way they went about their convnction. Everyone had a wonderful time.

Porto Rico: Old reliable 4KY has asked for suspension of his ORS due to temporary activity. Will be on the latter part of April. 4PQ at Mayaguez has been appointed an ORS.

Georgia: The Atlanta gang are threatening a re-organization. Hurray, hurray, or what have you? We sincerely hope this goes thru and get the old pep in order again. 4GY is on and can be relied upon for traffic. 4RN has not been on very much but takes a watch when possible. 4KU is back on and wants to arrange skeds north, east, south and west.

South Carolina: 4AAM at Charleston sends in the only report. What's the matter, fellows? You have been going splendidly. Keep up the good work.

Traffic: 4AAM 10, 4GY 8, 4RN 14.

ALABAMA—SCM, A. D. Trum, 5AJP—1928 is going to bring in good news from this section. Activity is abounding and new hams coming into the gang. Just as soon as the SCM can find the desired time, we are going to put over an activity campaign and see that all hams in Alabama keep in good standing in our ARRL. Let's all get together, fellows, and send in some good reports. 5ATS shot the old generator and is waiting for a good transformer now. 5AJP has been experimenting this month with the little time he has had. 5JY has been working consistently and reports fine work with schedules and traffic. 5ADA is getting ambitious and is taking an ICS course in radio besides working for a service company in his spare time. FB. 5AYL just purchased a hundred good looking QSL cards and has so many requests for them that he has to keep plugging in order to fill the orders. 5TB says to tell the gang that he's still alive and sends his 78. 5QP is down in Columbus, Miss., operating a broadcasting station. 5FL-5HM is in college. 5AJW, 5VC seems to be off the air for good. 5AXH is getting back on again after an absence of nearly a year. 5TB has a portable call in 5ADS and hopes to have it going to perfection in a 100 watt fone set. 5UV is going to try for a commercial license while on a trip to New Orleans. FB. 5ARY is on with his 210 which he paralyzed last November. 5ARG handles quite some traffic, keeping on the air regularly and being on schedule. 5WQ is QRW with the YLs and recording orchestras but he has a 50 watt in the making. 5DT got broke and sold out but we think it's YLitis. 5PD is now pounding brass using a 210 and fine DC. 5AS is an old WU op. He quite frequently rakes the hams over the coals for not QSLing. 5AXN is busy building that new 100 watt but is on now with a 210. 5AST, the portable outfit of 5AQW, has been on lately with a good note. 5OM was on the air for a while when he was home from college. 5MI is heard occasionally but we are unable to get much dope on him. 5OA has been QRW with exams. 5AGA is heard once in a while. 5YB had to be silent quite a while on account of key clicks and motor generator. 5JP and 5VW were on the air in Huntsville while at home during the holidays. 5AST has a renewed power supply and working plenty of skeds. Auburn brags of another new ham in Bruce Campbell who is on the air with the sig of 5AYW. Cecil Thomas is second op there. 5AX is on the air with the prettiest DC on a 210 ever heard and is getting around the world regularly.

Traffic: 5ADA 28, 5AYL 48, 5AJP 7, 5JY 60, 5ATS 60, 5UV 16, 5TB 45, 5AXH 5, 5ARY 18, 5PD 3, 5ARG 59, 5AXN 18, 5AST-5AQW 25, 5AGA 6, 5YB 98, 5AYW 7, 5AX 72.

QST FOR MARCH, 1928

WEST GULF DIVISION

OKLAHOMA—SCM, K. M. Ehret, 5APG—5ADO says "Every other station in Cushing has quit. Looks like it's up to me. HI!" 5ANL took out this month—all the interest seems gone.—reason—YLs and school work. 5AMO reports business deal transacted via radio. 5FJ is leaving for the Great Lakes again and 5AMO is taking over the job of RM. 5VH reports 5AZG a new ham in Fairview and urges that the fellows give him a call. 5AIR says 20 meter fone ND until he gets more filter as he blew all he had. Who can give him the QRA of oi-AGQ. 5APG keeps Naval Reserve skeds with 4HQ and NRRH. Seems like a mighty short report to come just before the big Ham blowout, fellows, so let's make up for it after the "Big Affair" passes into history.

Traffic: 5AIR 9, 5VH 20, 5AMO 209, 5ADO 24, 5APG 80.

SOUTHERN TEXAS—SCM, E. A. Sahn, 5YK—Activity in this section is increasing. There seem to be a larger number of stations on the air and more traffic handled. The San Antonio territory seems to be especially active. We have a newcomer in 5RV of San Antonio. He sends in a very good report on the new club station, 5SC, which is located at his place. 5HS is now on with remote control. 5HE is QRM'd by carpenters just at present. 5HE, 5HS, 5VL, 5AZD, 5JC, 5AT, 5RR, 5SC and 5HC are prominent San Antonio amateurs. 5AVI-5ARF has been appointed as Official Observer. Now, boys, watch your wave or you might hear from him. 5EW sends in his usual splendid report and then apologizes for not having done more. 5ALA blew his rectifying system but continues on raw AC. He has 5ACB of Duncan, Okla., visiting with him. 5AHP has moved to Houston. Houston amateurs are experimenting some with phones. This city is fortunate in having Harvey Wheeler and Arthur Tennant among their number.

Traffic: 5AHP 7, 5ALA 4, 5HS 1, 5EW 16, 5RV 74, 5SC 500.

CANADA

MARITIME DIVISION

PRINCE EDWARD ISLAND—SCM, F. W. Hyndman, 1BZ—1CO cancelled temporarily owing to removal to Toronto. 1BZ says not much doing. He is on 40 meters. 1AP reports not much doing, also. 1AA has a new ORS application going forward in a day or two. He is a new man who has done very well.

QUEBEC DIVISION

QUEBEC—SCM, Alex Reid, 2BE—Many of our members are entered in the International Tests and are very busy overhauling and making tests in preparation for February 6th. It is very nice to hear so many new stations on the air. This division has come to life with a bang, and what is really more interesting, we now have two active stations outside of this district.—2BW and 2AC, both of whom are doing good relay work. 2BJ of McGill College is now going strong. This station is on continuous watch about seven hours a day, has many skeds and looking for more. 2BV has rebuilt and is on again. 2CG has gone to Germany. 2BR erected his tower again and we expect better reports from now on. 2BG, 2BE and 2CW are very active and doing some very fine DX and relay work. 2BB, 2DO and 2AL are also pounding away as usual. 2AX is still experimenting but says to watch his smoke during the tests. 2BB shows the best traffic report and as usual, is always ready for skeds. 2AL and 2BE are on 20 meters every Sunday from 1 pm to 5 pm and would like to have more of the gang get down on this wonderful daylight band.

Traffic: 2BB 35, 2BR 7, 2AC 8, 2AL 6, 2BG 4, 2BE 8, 2CW 6.

ONTARIO DIVISION

ONTARIO—SCM, W. Y. Sloan, 9BJ—During the operating month just closing, some very excellent work has been carried out by the majority of our stations. The many holidays have supplied the time, and the fellows themselves, the ambition.

Eastern Dist: 3XQ is hopping along on 40 meters and has a schedule with 4CU in Edmonton, Alta. 3VO-9CC has returned from the I.R.E. Convention at New York, much impressed with what he saw and heard. 3AP seems to be letting his set have a further rest. 3JW will soon be back on the air with a more powerful set. 3XM is using a Belgian bottle and with raw AC on the plate is doing very good work. 3MP has been active on 20 meters and

has worked England once again. 3AK is on the air again using a 210 on 40 and getting out first rate.

Central Dist: 3CJ is on top of the heap this month with a very fine traffic total, and most of it very important stuff. 3DY actually used on test 26 different adaptions of existing transmitting circuits, with a Mullard 20 watt input tube as oscillator. 3AZ has been on 52.5 and 80 meters mostly of late, and is installing a 1000 cycle generator for plate supply. 3EL has a N.E. 250 on the air and is getting all set for the International Tests. 3BL is using 77 and 41 meters with effect, and is keeping schedules with nu9AIN and nu8AKI for the purpose of playing checkers via radio. 3BC reports for the first time and says that he is seriously on the air now, having worked 150 stations during the month. 3GN has forgotten the H tube for a while and is using the old fiver again with improved results, having worked a very fine string of stations and some good DX on 40, 52.5 and 80 meters. 3FC has not been on the air very much except for attendance at Prayer Meetings on 52.5. 9BJ, 9AL and 9BZ are all on the active list, and keeping schedules as usual. 9BZ is the latest convert to crystal-control in this neck-of-the-woods but everything is not working perfectly as yet. 3DV is working in the early morning hours and gets lots of DX. 3BT is using the 80 meter band mostly. 3AI is back again with MG plate supply. 3DC is getting wonderful results with his crystal set on 52.5 meters. 3PG is rebuilding his receiver, and 3BU is expected to break out any day now. 3EO breaks into the game using a 210 on 400 volts, RAC. Welcome to the Toronto gang, OM.

Southern Dist: Much activity is manifested throughout this district, but there is a lack of traffic. We take pleasure in correcting the error that appeared about 3FU leaving the district. He is home every weekend and is very much on the job. 3DU has left to locate in Toronto. 3AY at Niagara-on-the-Lake is a new arrival. Using a CX-310, he jumps right into the traffic game like an old timer. Welcome 3AY, there's lots of room, OM. 3DG is the latest addition to the ranks of ORS. 3IA has been under the weather most of the past month but is feeling better again, and will be on regularly now. We understand that 3XI and 3DZ of Sarnia have joined forces. 3AQ turns in the best traffic report of the district but there is lots of room for improvement, fellows. 3CS says he is having fine DX again now, and is getting all primed up for the tests.

Northern Dist: 3AR of Parry Sound, breezes in with a report this month. He promises to attend the Wednesday evening prayer-meetings on 52 regularly in the future, and is hoping to have another Parry Sound station on the air soon. 3HP reports no outstanding events this month, but as usual, turns in his consistent traffic totals.

Traffic: 3CJ 50, 9AL 36, 3AQ 13, 3HP 18, 9BJ 14, 3CS 12, 3BC 11, 3DY 8, 3GN 8, 3FU 8, 3FC 7, 3BL 7, 3EO 7, 8EL 4, 8AY 4, 8IA 4, 8CB 2, 8DC 1, 8DV 1.

VANALTA DIVISION

BRITISH COLUMBIA—SCM, E. S. Brooks, 5BJ—9AL enters the BPL with a total of 61 delivered and a grand total of 125. 5BR was a good runner up with 98 for a total. FB, OMs, and glad to hear it was done on 80. These two stations keep a daily sked and sure rustle biz. 5CT has a biweekly sked with ne4HH on 80. 5AM is back home and will have the old set perking very soon. 5CP has some nice looking apparatus and is hitting em off in good shape. 5CF has been getting some new parts and feels quite proud. 5AU has laid off to remodel. He says the OM got a Radiola 17 for Xmas and he doesn't dare touch the key now. HI. 5EF has been closed down by the R.I. during BCL hours. Say, gang, the R.I. says if the key clicks are not eliminated some more are due to be closed down pronto. Now, fellows, what has become of your reports for this month, one card from an ORS. A lot of ORS looking apparatus and is hitting em off in good certificates are due to be cancelled next month if no reports are received. Come on, fellows, surely you can afford a one cent stamp so your card will be in by the 15th.

Traffic: 5AL 125, 5BR 98, 5CT 9.

ALBERTA DIVISION

ALBERTA—SCM, A. H. Asmussen, 4GGT—Calgary amateurs have drawn up a daily schedule for code practice. 4CC has been too busy for radio. 4AG had another tube go west and is off again.

4GD and 4GL are on regularly with a very good note. 4AF is jamming the air with AC and a big tube. 4XO complains of lack of traffic and longs for DX. 4JJ is on x daily. 4AE should turn in a good msg total. Who is the first operator at 4DQ? 4IO says the eighty band is best. 4AH is now active a good msg report. 4CU has a 250 watter going strong and wants to know why he can't QSO Brazil. 4HM is getting very good reports since using his new mercury arc rectifier. 4EP will be on soon. 4HF has a new portable and gets out FB. 4BC has a new Jr. operator. Congrats, OM. 4DG received his ticket and is operator on a motorship using KFMM. 4CS is another Alberta ham with a ticket leaving for England. 4AL is on the air again, do your stuff, OM. 4FF spent the holidays in Edmonton. 4EC will be on soon. 4HA is on daily and does nice work. Let's hear from 4AK and 4FB and the rest. 4CL gets many BCL reports. 4AF has been wiring in his monthly RM report.

Traffic: 4GL 10, 4XO 6, 4AF 6, 4AH 9, 4CU 8, 4HA 5, 4GT 2.

PRAIRIE DIVISION

SASKATCHEWAN—SCM, W. J. Pickering, 4FC—4AC is back with the gang again with a QRA of Wynyard and wants akeds particularly on 20 meters. 4BM at Lang has at last managed to get his signals out of his back yard and is getting out fine. 4EV has improved lately. 4CB reports very little activity. 4AV is in Prince Albert again and on the air. 4FH has a 50 watter now and working out well. 4CK has erected a new antenna and gets better DX but isn't so good locally. 4HH has his MO-PA set going and turns in a nice message total also a New Year's resolution to report regularly. Wish the rest of the gang would also make that resolution. 4HS is bothered by poor weather and no traffic.

Traffic: 4HH 51, 4AC 22, 4CK 17, 4HS 16.

MANITOBA—SCM, D. B. Sinclair, 4FV—Well, fellows, just take a look at 4BT's traffic total. In the 13 days he was on the air, he certainly made the rest of us look small. There is little traffic handled in this section but not nearly enough. Only two unsolicited reports were received this month. That is certainly showing the A.R.R.L. spirit in standing behind your SCM. 4AW and 4DW are the two reporting stations—both complain of bad weather and lack of time. Our new station, 4RV, has received his official license at last—4GG. Another new ham, 4MY, is on with a temporary call while awaiting his license. 4DU continues his DX. He was recently QSO nc5AW in Yukon and VCB in the North-West Territories. 4EH is QRW and has not been heard from. 4DP and 4EK both have nice DC notes now and get out fine. 4GI had a visit from 4FO, of Regina, who is again moving to Winnipeg. 4BP, owing to an absence of batteries, has been QRX this month. 4CT gets the good reports still. While 4BT was home, his xtal sure pushed right out. 4EY, 4GI and 4DU are the proud possessors of a crystal which will not oscillate. 4CT and 4FV are planning C.C. in the spring, however. 4EY has been out of town but his set perks OK. 4FV's antenna blew down for the 9th time and he was also QRW exams. Fellows, ORS are too easy to get and hold. From now on, failure to report for two consecutive months, or an inability to handle an average of more than 10 messages for two consecutive months, will mean the loss of your certificate. Govern yourselves accordingly. Several new stations deserve them more than you old-timers. We have yet to hear from any out of town stations. Drop us a line, OMs.

Traffic: 4BT 44, 4DW 1, 4GI 3, 4GG 12, 4FV 3, 4CT 24.

LATE AND ADDITIONAL REPORTS

6BUH blew his H tube so will be tied up for a while until a new bottle is forthcoming. 6BOY is sailing for Australia and hopes to have a s. w. xmitter with him. 9BET says "Why can't we have more deliveries?" That's what we all say. 3CO has been off the air for quite a while but expects to be on very soon again. 3SJ is busy preparing for a commercial ticket. 3KJ hasn't been able to be on but is going to try to get back soon. 6BBJ is temporarily off the air while the station is under construction. 6BTX says he is sorry his SCM is resigning. (McRae, take note). 1BMS is going to sea and says goodbye to the gang for about 8 years. Have a good time, OM.

Traffic: 9BET 13, 6BTX 61, 6BOY 38.