

RCA
REFERENCE
BOOK
1956

published by



Copyright 1955 Radio Corporation of America

F1

Marca Registrada

*A compendium of
valuable information on
RCA Receiving Tubes,
Picture Tubes,
Cathode-Ray and Power
Tubes, Batteries, Service
Parts, Test and
Measuring Equipment,
Electronic Components,
and Semiconductor
Devices.*



A diary for 1956.

Maps of the world today.



PRICE
\$1.00

RADIO CORPORATION OF AMERICA
Tube Division **Harrison, N. J.**

Printed in the United States of America

RCA RECEIVING TUBE CHART

Miniature, Metal, GT, and other Receiving Types

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use <small>Values to right give operating conditions and characteristics for indicated typical use</small>	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma.	Plate Current Ma.	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) μ mhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
00-A	Detector Triode	D12	4D	D.C. F	5.0	0.25	Grid-Leak Detector	45	Grid Return to (-) Filament			1.5	30000	666	20	—	—
01-A	Detector Amplifier	D12	4D	D.C. F	5.0	0.25	Class A Amplifier	90 135	- 4.5 - 9.0	—	—	2.5 3.0	11000 10000	725 800	8.0 8.0	—	—
0Y4	Half-Wave Gas Rectifier	B2	4BU	Cold	—	—	Rectifier	Max. Peak Inverse Plate Volts, 300			Max. Peak Plate Current, 500 ma. Max. DC Starting Volts, 95						
0Z4	Full-Wave Gas Rectifier	B2	4R	Cold	—	—	Rectifier	Starting-Supply Voltage per Plate, 300 min. peak volts, Peak Plate Current, 200 max. ma. DC Output Current, 75 max., 30 min. ma. DC Output Voltage, 300 max. volts.									
0Z4-G	Full-Wave Gas Rectifier	B1a	G-4R	Cold	—	—	Rectifier	Max. Peak Inverse Volts, 330 Max. Peak Plate Ma., 5									
1A3	HF Diode	B0	5AP2	H	1.4	0.15	Detector Rectifier	Max. DC Output Ma., 0.5 Max. Peak Heater-Cathode Volts, 140									
1A4-P	Remote-Cutoff Pentode	D9	4M	D.C. F	2.0	0.06	Amplifier	For other characteristics, refer to Type 1D5-GP.									
1A5-GT	Power Amplifier Pentode	C2b	G-6X	D.C. F	1.4	0.05	Class A Amplifier	85 90	- 4.5 - 4.5	85 90	0.7 0.8	3.5 4.0	300000 300000	800 850	—	25000 25000	0.100 0.115
1A6	Pentagrid Converter	D9	6L	D.C. F	2.0	0.06	Converter	135 180	{ - 3.0 min. }	67.5 67.5	2.5 2.4	1.2 1.3	400000 500000	Anode-Grid (#2): 180 μ max. volts, 2.3 ma. Oscillator-Grid (#1) Resistor = Conversion Transcond., 300 micromhos.			
1A7-GT	Pentagrid Converter	C3	GT-72K	D.C. F	1.4	0.05	Converter	90	0	45 \clubsuit	0.7	0.6	600000	Anode-Grid (#2): 90 max. volts, 1.2 ma. Oscillator-Grid (#1) Resistor, 0.2 meg. Conversion Transcond., 250 micromhos.			
1AC5	Power Pentode	A	8CP	F	1.25	0.04	Class A Amplifier	30 45 67.5	- 2 - 3 - 4.5	30 45 67.5	0.1 0.2 0.4	0.5 1.0 2.0	200000 170000 150000	450 600 750	—	50000 40000 25000	0.005 0.015 0.050
1AD5	Sharp-Cutoff Pentode	A	8CP	F	1.25	0.04	Class A Amplifier	30 45 67.5	0 0 0	30 45 67.5	0.16 0.35 0.75	0.45 0.9 1.85	700000 700000 700000	430 580 735	—	—	—
1B3-GT	Half-Wave Rectifier	D2	3C	F	1.25	0.2	Half-Wave Rectifier	Max. Peak Inverse Plate Volts, 30000			Max. Average Plate Mu., 2 Max. Frequency of Supply Voltage, 300 Kc						

14

1B4-P	RF Amplifier Pentode	D9	4M	D.C. F	2.0	0.05	Amplifier	For other characteristics, refer to Type 1E5-GP.										
1B5/25S	Duplex-Diode Triode	D5	6M	D.C. F	2.0	0.06	Triode Unit as Amplifier	For other characteristics, refer to Type 1H6-G.										
1B7-GT	Pentagrid Converter	C3	GT-72K	D.C. F	1.4	0.10	Converter	90	0	45 \clubsuit	1.3	1.5	350000	Anode-Grid (#2): 90 max. volts, 1.6 ma. Oscillator-Grid (#1) Resistor, 0.2 meg. Conversion Transcond., 350 micromhos.				
1C5-GT	Power Amplifier Pentode	C2b	G-6X	D.C. F	1.4	0.10	Class A Amplifier	83 90	- 7.0 - 7.5	83 90	1.6 1.6	7.0 7.5	110000 115000	1500 1550	—	9000 8000	0.20 0.24	
1C6	Pentagrid Converter	D9	6L	D.C. F	2.0	0.12	Converter	For other characteristics, refer to Type 1C7-G.										
1C7-G	Pentagrid Converter	D9	G-72	D.C. F	2.0	0.12	Converter	135 180	- 3.0 - 3.0	67.5 67.5	2.5 2.0	1.3 1.5	600000 700000	Anode-Grid (#2): 180 μ max. volts, 4.0 ma. Oscillator-Grid (#1) Resistor = Conversion Transcond., 325 micromhos.				
1D5-GP	Remote-Cutoff Pentode	D9	0-5Y	D.C. F	2.0	0.06	Class A Amplifier	90 180	{ - 3.0 min. }	67.5 67.5	0.9 0.8	2.2 2.3	600000 1.0 $\$$	720 750	—	—	—	
1D5-GT	Remote-Cutoff Pentode	D9	G-50	D.C. F	2.0	0.05	Class A Amplifier	180	- 3.0	67.5	0.7	2.2	600000	650	—	—	—	
1D7-G	Pentagrid Converter	D9	G-72	D.C. F	2.0	0.06	Converter	For other characteristics, refer to Type 1A6.										
1D8-GT	Diode-Triode-Power Amplifier Pentode	C2b	G-8AJ	D.C. F	1.4	0.10	Pentode Unit as Class A Amplifier	45	- 4.5	45	0.3	1.6	300000	650	—	20000	0.035	
								90	- 9.0	90	1.0	5.0	200000	925	—	12000	0.200	
								90	0	—	—	0.3	77000	325	25	—	—	
1E5-GP	RF Amplifier Pentode	D9	0-5Y	D.C. F	2.0	0.06	Class A Amplifier	90 180	- 2.0 - 3.0	67.5 67.5	0.7 0.6	1.6 1.7	1.0 $\$$ 1.3	600 650	—	—	—	
1E7-GT	Twin-Pentode Power Amplifier	C2b	0-8C	D.C. F	2.0	0.24	Class A Amplifier	135	- 7.5	135	—	—	—	Power Output is for one tube at stated plate-to-plate load.			24000	0.575
1E8	Pentagrid Converter	A	8DN	F	1.25	0.04	Converter	30 45 67.5	0 0 0	30 45 67.5	0.8 1.1 1.5	0.3 0.6 1.0	300000 400000 400000	Oscillator Grid (#1) Resistor, 0.1 meg. Conversion Transcond., 150 micromhos				
1F4	Power Amplifier Pentode	D12	8K	D.C. F	2.0	0.12	Amplifier	For other characteristics, refer to Type 1F5-G.										
1F5-G	Power Amplifier Pentode	D10	G-6X	D.C. F	2.0	0.12	Class A Amplifier	90 135	- 3.0 - 4.5	90 135	1.1 2.4	4.0 8.0	240000 200000	1400 1700	—	20000 16000	0.11 0.31	
1F6	Duplex-Diode Pentode	D9	8W	D.C. F	2.0	0.06	Pentode Unit as Amplifier	For other characteristics, refer to Type 1F7-G.										
1F7-G	Duplex-Diode Pentode	D9	G-7AF	D.C. F	2.0	0.06	Pentode Unit as RF Amplifier	180	- 1.5	67.5	0.7	2.2	1.0 $\$$	650	—	—	—	
							Pentode Unit as AF Amplifier	135 \clubsuit	- 2.0	Screen Supply, 135 volts applied through 0.8-megohm resistor Grid Resistor,** 1.0 megohm. Voltage Gain, 46.						—	—	—
1G4-GT	Medium-Mu Triode	C2b	G-55	D.C. F	1.4	0.05	Class A Amplifier	90	- 6.0	—	—	2.3	10700	825	8.8	—	—	
1G5-G	Power Amplifier Pentode	D10	G-8X	D.C. F	2.0	0.12	Class A Amplifier	90 135	- 6.0 - 13.5	90 135	2.5 2.5	8.5 8.7	133000 160000	1500 1550	—	8500 9000	0.25 0.55	

Discontinued types are shown in light face.

15



Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias m Volts	Screen Supply Volts	Screen Current Mz	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimens.	S. C.	C. T.	Volts	Amp.											
1G6-GT	Twin-Triode Amplifier	C2b	G-7AB	D.C. F	1.4	0.10	Class B Amplifier	90	0	—	—	Power Output is for one tube at stated plate-to-plate load.			12000	0.350	
1H4-G	Detector* Amplifier	D3	G-55 ₂	D.C. F	2.0	0.06	Class A Amplifier	90	-4.5	—	—	2.5	11000	850	9.3	—	—
							Class B Amplifier	135	-9.0	—	—	3.0	10300	900	9.3	—	—
1H5-GT	Diode High-Mu Triode	C3	GT-52K	D.C. F	1.4	0.05	Triode Unit as Class A Amplifier	90	0	—	—	0.15	240000	275	65	—	—
1H6-G	Duplex-Diode Triode	D3	G-7AA	D.C. F	2.0	0.06	Triode Unit as Class A Amplifier	135	-3.0	—	—	0.8	35000	575	20	—	—
1J5-G	Power Pentode	D10	G-6X	D.C. F	2.0	0.12	Class A Amplifier	135	-16.5	135	2.0	7.0	105000	950	—	13500	0.45
1J6-G	Twin-Triode Amplifier	C10	G-7AB	D.C. F	2.0	0.24	Class B Amplifier	135	0	—	—	Power Output is for one tube at stated plate-to-plate load.			10000	2.1	
1J6-GT	Twin-Triode Amplifier	C10	G-7AB	D.C. F	2.0	0.24	Class B Amplifier	135	-3.0	—	—	Power Output is for one tube at stated plate-to-plate load.			10000	1.9	
1L4	RF Amplifier Pentode	B0	6AR	D.C. F	1.4	0.05	Class A Amplifier	90	0	67.5	1.2	2.9	600000	925	—	—	—
1L6	Pentagrid Converter	B0	7DC	D.C. F	1.4	0.05	Converter	90	0	45	0.6	0.5	650000	1025	—	—	Anode-Grid (#2): 90 max. volts, 1.2 ma. Oscillator Grid (#1) Resistor, 0.2 meg. Conversion Transcond., 300 micromhos.
1LA4	Power Amplifier Pentode	B5	5AD ₁	D.C. F	1.4	0.05	Amplifier	For other characteristics, refer to Type 1A5-GT.									
1LA6	Pentagrid Converter	B5	7AK	D.C. F	1.4	0.05	Converter	90	0	45	0.6	0.55	750000	1025	—	—	Anode-Grid (#2): 90 max. volts, 1.2 ma. Oscillator Grid (#1) Resistor, 0.2 meg. Conversion Transcond., 250 micromhos.
1LB4	Power Amplifier Pentode	B5	5AD ₂	D.C. F	1.4	0.05	Class A Amplifier	For other characteristics, refer to Pentode Unit of Type 1D8-GT.									
1LC5	Sharp-Cutoff Pentode	B5	7AO	D.C. F	1.4	0.05	Class A Amplifier	45	0	45	0.35	1.10	700000	750	—	—	—
1LC6	Pentagrid Converter	B5	7AK	D.C. F	1.4	0.05	Converter	45	0	35	0.75	0.70	300000	775	—	—	Anode-Grid (#2): 50 max. volts, 1.4 ma. Oscillator-Grid (#1) Resistor, 0.2 meg. Conversion Transcond., 275 micromhos.
1LD5	Diode-Pentode	B5	6AX	D.C. F	1.4	0.05	Pentode Unit as Class A Amplifier	Plate Supply, 90 v applied through 1 meg. resistor. Screen Supply, 90 v applied through 5.6 meg. resistor. Grid Bias, 0 v. Grid Resistor, 10 megohms. Voltage Gain, 101 approx.									
1LE3	Medium-Mu Triode	B5	4AA	D.C. F	1.4	0.05	Class A Amplifier	90	0	—	—	4.5	11200	1300	14.5	—	—
1LG5	Remote-Cutoff Pentode	B5	7AO	D.C. F	1.4	0.05	Class A Amplifier	90	0	45	0.4	1.7	1.05	800	—	—	—
								90	-1.5	90	0.9	3.7	500000	1150	—	—	—

16

1LH4	Diode High-Mu Triode	B5	5AG	D.C. F	1.4	0.05	Triode Unit as Class A Amplifier	For other characteristics, refer to Type 1H5-GT.									
1LN5	Sharp-Cutoff Pentode	B5	7AO	D.C. F	1.4	0.05	Class A Amplifier	90	0	90	0.35	1.6	1.15	800	—	—	—
1N5-GT	Sharp-Cutoff Pentode	C3	GT-5YK	D.C. F	1.4	0.05	Class A Amplifier	90	0	90	0.3	1.2	1.55	750	—	—	—
1N6-G	Diode-Power Amplifier Pentode	D1	G-7AM	D.C. F	1.4	0.05	Pentode Unit as Class A Amplifier	90	-4.5	90	0.7	3.4	300000	800	—	25000	0.1
1P5-GT	Remote-Cutoff Pentode	C3	GT-5YK	D.C. F	1.4	0.05	Class A Amplifier	90	0	90	0.7	2.3	800000	750	—	—	—
1Q5-GT	Beam Power Tube	C2b	G-6AF	D.C. F	1.4	0.1	Class A Amplifier	90	-4.5	90	1.3	9.5	90000	2200	—	8000	0.27
1R5	Pentagrid Converter	B0	7AT	D.C. F	1.4	0.05	Converter	45	0	45	1.9	0.7	600000	Grid #1 Resistor, 100000 ohms. Conversion Transcond., 300 umhos.			
1S4	Power Amplifier Pentode	B0	7AV	D.C. F	1.4	0.1	Class A Amplifier	45	-4.5	45	0.8	3.8	100000	1250	—	8000	0.065
1S5	Diode-Pentode	B0	6AU	D.C. F	1.4	0.05	Pentode Unit as AF Amplifier	90	-7.0	67.5	1.4	7.4	100000	1575	—	8000	0.27
1T4	Remote-Cutoff Pentode	B0	6AR	D.C. F	1.4	0.05	Class A Amplifier	Plate Supply, 90 v applied through 1 meg. resistor. Screen Supply, 90 v applied through 3.1 meg. resistor. Grid Bias, 0 volts. Grid Resistor, 10 megohms. Voltage Gain, 66 approx.									
1T5-GT	Beam Power Tube	C2b	G-6X	D.C. F	1.4	0.05	Class A Amplifier	45	0	45	0.7	1.7	350000	700	—	—	—
1T6	Diode-Pentode	A	8DA	F	1.25	0.04	Pentode Unit as Class A Amplifier	90	0	67.5	1.4	3.5	500000	900	—	—	—
1U4	Sharp-Cutoff Pentode	B0	6AR	D.C. F	1.4	0.05	Class A Amplifier	90	0	90	0.50	1.0	1.05	900	—	—	—
1U5	Diode-Pentode	B0	8BW	D.C. F	1.4	0.05	Pentode Unit as Class A Amplifier	Plate Supply, 90 volts applied through 1 meg. resistor. Screen Supply, 90 volts applied through 3.1 meg. resistor. Grid Bias, 0 volts. Grid Resistor, 10 megohms. Voltage Gain, 66 approx.									
1-V	Half-Wave Rectifier	D5	4Q	H	6.3	0.3	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 325 Min. Total Effective Plate-Supply Impedance: Up to 117 Max. DC Output Ma., 45 volts, 0 ohms; at 150 volts, 30 ohms; at 325 volts, 75 ohms.									
1V2	Half-Wave Rectifier	B0a	9U	F	0.625	0.3	Pulsed Rectifier	Max. Peak Inverse Plate Volts, 7500 Max. Peak Plate Ma., 10 Max. Average Plate Ma., 0.5									
1X2-A	Half-Wave Rectifier	B4	8V	F	1.25	0.2	Half-Wave Rectifier	Max. Peak Inverse Plate Volts, 18000 Max. Peak Plate Ma., 10 Max. Average Plate Ma., 1									
1X2-B	Half-Wave Rectifier	B4	8V	F	1.25	0.2	Pulsed-Rectifier in Scanning Systems of TV Receivers	Max. Peak Inverse Plate Volts, 22000 (Absolute Value) Max. Peak Plate Ma., 45 Max. Average Plate Ma., 0.5									
2A3	Power Amplifier Triode	E3	4D	F	2.5	2.5	Class A Amplifier	250	-45.0	—	—	60.0	800	5250	4.2	2500	3.5
							Push-Pull Class AB ₁ Amplifier	300	Cath. Bias, 280 ohms -62 volts, fixed bias	80.0	—	—	—	—	—	—	—
2A4-G	Glow-Discharge Triode	D3	G-55 ₂	D.C. F	2.5	2.5	Relay Service	Max. Peak Inverse Anode Volts, 200 Max. Peak Forward Anode Volts, 200 Max. Peak Anode Current, 1.25 ampere Max. Av. Anode Current, 0.1 ampere									

Discontinued types are shown in light face.

17

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Ma	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Diagn.	S. C.	C. T.	Volts	Am.											
2A5	Power Amplifier Pentode	D12	80	H	2.5	1.25	For other characteristics, refer to Type 6F6-G.										
2A6	Duplex-Diode High-Mu Triode	D9	6G	H	2.5	0.6	For other characteristics, refer to Type 6SQ7.										
2A7	Pentagrid Converter	D9	7C	H	2.5	0.8	For other characteristics, refer to Type 6A8.										
2AF4-A	VHF Oscillator Triode	B0	7DK	H	2.35	0.6	Class A Amplifier	80	Cath. Bias Res., 150 ohms	16	2270	6600	15	15	15	15	15
							Oscillator at 950 Mc.	100									
2B7	Duplex-Diode Pentode	D9	7D	H	2.5	0.8	For other characteristics, refer to Type 6B8 G.										
2E5	Electron-Ray Tube	D5	0R	H	2.5	0.8	For other characteristics, refer to Type 6E5.										
3A2	Half-Wave Rectifier	B4	9DT	H	3.15	0.22	Pulsed-Rectifier in Scanning Systems of TV Receivers	Max Peak Inverse Plate Volts, 18000		Max Peak Plate Ma., 80		Max. Average Plate Ma., 1.5					
3A3	Half-Wave Rectifier	D2	8E2	H	3.15	0.22	Pulsed-Rectifier in Scanning Systems of TV Receivers	Max Peak Inverse Plate Volts, 10000		Max Peak Plate Ma., 80		Max. Average Plate Ma., 1.5					
3AR-GT	Diode-Triode RF Amplifier Pentode	C0	8AS	D.C. F	1.4	0.1	Triode Unit as Class A Amplifier	90	0	—	—	0.2	200000	325	65	—	—
							Pentode Unit as Class A Amplifier	90	0	90	0.5	1.5	800000	750	—	—	—
3AL5	Twin-Diode	A1	6BT	H	3.15	0.6	Detector Rectifier	Max Peak Inverse Volts, 330		Max DC Output Ma per Plate, 9		Max. Peak Heater-Cathode Volts, 330					
3AU6	Sharp-Cutoff Pentode	B0	7DK1	H	3.15	0.6	Class A Amplifier	100	Cath. Bias	100	2.1	5.0	500000	3900	Cath. Bias Res., 150 ohms	100	—
3AV6	Twin-Diode High-Mu Triode	B0	7DT	H	3.15	0.6	Triode Unit as Class A Amplifier	100	- 1.0	—	—	0.5	80000	1250	Cath. Bias Res., 68 ohms	100	—
3B2	Half-Wave Rectifier	E1a	26	H	3.15	0.22	Pulsed Rectifier in TV Service	Max DC Inverse Plate Volts, 25000		Max Peak Plate Ma., 80		Max Average Plate Ma., 1.1		Max. Total DC and Peak Inverse Plate Volts, 35000 (Absolute)			
							Class A Amplifier	250	Cath. Bias	150	2.1	7.4	800000	5700	Cath. Bias Res., 180 ohms	—	—
3BY6	Pentagrid Amplifier	B0	7CM	H	3.15	0.6	Sym Separator and Sym Clipper	10	0	25	3.5	1.4	Grid No. 3 Volts, 0				

3BZ6	Semi-converter Cutoff Pentode	B0	7CM	H	3.15	0.3	Class A Amplifier	200	Cath. Bias	150	2.6	11	0.6	6100	Cath. Bias Res., 180 ohms	—	—
3CB6	Sharp-Cutoff Pentode	B0	7CM	H	3.15	0.6	Class A Amplifier	200	Cath. Bias	150	2.8	9.5	600000	6200	Cath. Bias Res., 180 ohms	—	—
3CF6	Sharp-Cutoff Pentode	B3	7CM	H	3.15	0.6	Class A Amplifier	200	- 6.5	150	2.8	9.5	600000	6200	Cath. Bias Res., 180 ohms	—	—
3LF4	Beam Power Tube	B5	6BB	D.C. F	1.4	0.1	Class A Amplifier	For other characteristics, refer to Type 3Q5-GT.									
3Q4	Power Amplifier Pentode	B0	7BA	D.C. F	1.4	0.1	Class A Amplifier	For other characteristics, refer to Type 3V4									
3Q5-GT	Beam Power Tube	C2b	G-1AP	D.C. F	1.4	0.1	Class A Amplifier	110	- 6.6	110	1.4	10.0	100000	2200	—	8000	0.40
							Class A Amplifier	110	- 6.6	110	1.1	8.5	110000	2600	—	8000	0.33
3S4	Power Amplifier Pentode	B0	7BA	D.C. F	1.4	0.1	Class A Amplifier	90	- 7	67.5	1.4	7.4	100000	1575	—	8000	0.27
							Class A Amplifier	90	- 7	67.5	1.1	6.1	100000	1425	—	8000	0.235
3V4	Power Amplifier Pentode	B0	6BX	D.C. F	1.4	0.1	Class A Amplifier	90	- 4.5	90	2.1	9.5	100000	2150	—	10000	0.27
							Class A Amplifier	90	- 4.5	90	1.7	7.7	120000	2600	—	10000	0.24
4BQ7-A	Medium-Mu Twin-Triode	B0a	6AJ	H	4.2	0.6	Each Unit as Class A Amplifier	150	Cathode Bias Res., 220 ohms		9.0	6100	6400	39	Cutoff Volts, -10	—	—
4BZ7	Medium-Mu Twin-Triode	B0a	6AJ	H	4.2	0.6	Each Unit as Class A Amplifier	150	Cathode Bias Res., 220 ohms		10	5600	6800	38	Cutoff Volts, -11	—	—
5AM8	Diode—Sharp-Cutoff Pentode	B0a	27	H	4.7	0.6	Diode Unit	Max. DC Plate Ma., 5		Max. Peak Heater-Cathode Volts, \pm 200		DC Volts Not to Exceed +100					
							Pentode Unit as Class A Amplifier	200	Cath. Bias	150	2.7	11.5	—	7000	Cath. Bias Res., 120 ohms	—	—
5AN8	Medium-Mu Triode—Sharp-Cutoff Pentode	B0a	6DA	H	4.7	0.6	Triode Unit as Class A Amplifier	200	- 6	—	—	13	5750	3300	19	—	—
							Pentode Unit as Class A Amplifier	200	Cath. Bias	150	2.8	9.5	300000	6200	Cath. Bias Res., 180 ohms	—	—
5AQ5	Beam Power Tube	B1	7B2	H	4.7	0.6	Single Tube Class A Amplifier	180	- 8.5	180	3.0	29.0	58000	3700	—	5500	2.0
							Push-Pull Class AB ₁ Amplifier	250	- 12.5	250	4.5	45.0	52000	4100	—	5000	4.5
5AS4	Full-Wave Rectifier	C3a	C-8T1	H	4.7	3.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 550		Max. DC Output Ma., 300		Min. Total Effect. Supply Imped. per Plate, 9 ohms		Max. Peak Plate Ma., 1000			
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 550		Max. DC Output Ma., 275		Min. Value of Input Choke, 10 henries		Max. Peak Inverse Volts, 1550			
5AS8	Diode—Sharp-Cutoff Pentode	B0a	6DS	H	4.7	0.6	Diode Unit	Max. Peak Inverse Plate Volts, 330		Max. Peak Plate Ma., 50		Max. Average Plate Ma., 5.0					
							Pentode Unit as Class A Amplifier	200	Cath. Bias	150	3.0	9.5	300000	6200	Cath. Bias Res., 180 ohms	—	—
5AT8	Triode—Pentode Converter	B0a	8AK	H	4.7	0.45	Triode Unit as 250-Mc. Oscillator	150	Grid Resistor, 2700 ohms		Grid Current, 3.6 Ma.		Plate Current, 13 Ma.				
							Pentode Unit as Mixer	150	Grid-No. 2 Volts, 150		Mixer Grid-No. 1 Supply Volts, -3.5		Max. Grid-No. 1 Resistor, 12000 ohms		Conversion Transconductance, 2100 μ mbas		

Discontinued types are shown in light face.

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) μmhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
5A24	Full-Wave Rectifier	C2a	5T	F	5.0	2.0	For ratings and characteristics, refer to Type 5Y3-GT										
5J6	Medium-Mu Twin-Triode	B0	7BF	H	4.7	0.6	Each Unit as Class A Amplifier	100	Cath. Res., 220 ohms, both units	—	8.5	7100	5300	38	—	—	
							Push-Pull Class C Amplifier	150	-10	Cath. Res., 220 ohms, both units	30	Grid Current, 16 Ma	—	—	3.5		
5T4	Full-Wave Rectifier	D7	5T	F	5.0	2.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 450	Max. DC Output Ma., 225	Min. Total Effect. Supply Imped. per Plate, 150 ohms	Max. Peak Inverse Volts, 1550	Max. Peak Plate Ma., 675	Min. Value of Input Choke, 3 henries				
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 550	Max. DC Output Ma., 225	Min. Value of Input Choke, 10 henries	Max. Peak Inverse Volts, 1550	Max. Peak Plate Ma., 675					
5U4-G	Full-Wave Rectifier	E2	G-5T1	F	5.0	3.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 450	Max. DC Output Ma., 225	Min. Total Effect. Supply Imped. per Plate, 170 ohms	Max. Peak Inverse Volts, 1550	Max. Peak Plate Ma., 675	Min. Value of Input Choke, 10 henries				
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 550	Max. DC Output Ma., 225	Min. Value of Input Choke, 10 henries	Max. Peak Inverse Volts, 1550	Max. Peak Plate Ma., 675					
5U4-GB	Full-Wave Rectifier	D12a	G-5T1	H	5.0	3.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 550	Max. DC Output Ma., 300	Min. Total Effect. Supply Imped. per Plate, 97 ohms	Max. Peak Inverse Volts, 1550	Max. Peak Plate Ma., 1000	Min. Value of Input Choke, 10 henries				
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 550	Max. DC Output Ma., 275	Min. Value of Input Choke, 10 henries	Max. Peak Inverse Volts, 1550	Max. Peak Plate Ma., 1000					
5U8	Triode-Remote-Cutoff Pentode	B0a	9AE	H	4.7	0.6	Triode Unit as Class A Amplifier	150	Cath. Bias	—	18	5000	8500	40	Cath. Res., 56 ohms		
							Pentode Unit as Class A Amplifier	250	Cath. Bias	110	3.5	10	40000	5200	—	Cath. Res., 68 ohms	
5V4-G	Full-Wave Rectifier	D10	G-5L1	H	5.0	2.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 375	Max. DC Output Ma., 175	Min. Total Effect. Supply Imped. per Plate, 100 ohms	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 525	Min. Value of Input Choke, 4 henries				
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 500	Max. DC Output Ma., 175	Min. Value of Input Choke, 4 henries	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 525					
5W4	Full-Wave Rectifiers	C2	5T	F	5.0	1.5	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 350	Max. DC Output Ma., 100	Min. Total Effect. Supply Imped. per Plate, 50 ohms	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 300	Min. Value of Input Choke, 6 henries				
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 500	Max. DC Output Ma., 100	Min. Value of Input Choke, 6 henries	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 300					
5X4-G	Full-Wave Rectifier	E2	G-5Q	F	5.0	3.0	For other ratings, refer to Type 5U4-G.										
5X8	Triode-Pentode Converter	B0a	9AK	H	4.7	0.6	Triode Unit as 250-Mc Oscillator	150	Grid Resistor, 2700 ohms	Grid Current, 3.6 Ma.	Plate Current, 13 Ma.	Power Output (Approx.), 0.5 Watt					
							Pentode Unit as Mixer	150	Grid-No 2 Volts, 150	Mixer Grid-No 1 Supply Volts, -3.5	Use: Volts at Mixer Grid-No 1 (RMS), 7.6	Mixer Grid-No 1 Resistor, 120000 ohms	Conversion Transconductance, 2100 μmhos				

5Y3-G 5Y3-GT	Full-Wave Rectifiers	D10 D5	G-5T1; G-5T1	F	5.0	2.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 350	Max. DC Output Ma., 125	Min. Total Effect. Supply Imped. per Plate, 50 ohms	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 400					
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 500	Max. DC Output Ma., 125	Min. Value of Input Choke, 10 henries	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 400					
5Y4-G	Full-Wave Rectifier	D10	G-5Q	F	5.0	2.0	For other ratings, refer to Type 5Y3-GT										
5Z3	Full-Wave Rectifier	E3	4C	F	5.0	3.0	For other ratings, refer to Type 5U4-G.										
5Z4	Full-Wave Rectifier	C2	5L	H	5.0	2.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 350	Max. DC Output Ma., 125	Min. Total Effect. Supply Imped. per Plate, 50 ohms	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 375					
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 500	Max. DC Output Ma., 125	Min. Value of Input Choke, 5 henries	Max. Peak Inverse Volts, 1400	Max. Peak Plate Ma., 375					
6A3	Power Amplifier Triode	E3	4D	F	6.3	1.0	Amplifier	For other characteristics, refer to Type 6B4-G.									
6A4/LA	Power Amplifier Pentode	D12	5B	F	6.3	0.3	Class A Amplifier	100 180	- 6.5 -12.0	100 180	1.6 3.9	9.0 22.0	83250 45500	1200 2200	—	11000 8000	0.31 1.40
6A6	Twin-Triode Amplifier	D12	7B	H	6.3	0.8	Amplifier	For other characteristics, refer to Type 6N7-GT.									
6A7 6A7S	Pentagrid Converters	D9	7C	H	6.3	0.3	Converter	For other characteristics, refer to Type 6A8.									
6A8 6A8-G 6A8-GT	Pentagrid Converters	C1 D8 C3	8A G-8A1 GT-8A2	H	6.3	0.3	Converter	100 250	- 1.5 - 3.0	50 100	1.3 2.7	1.1 3.5	600000 360000	Anode-Grid (#2): 250 Ω max. v.	4.0 ma. Oscillator-Grid (#1) Res. =	Conversion Transcond., 590 μmhos.	
							Class A Amplifier	100 250	Cath. Res., 270 ohms Cath. Res., 200 ohms	3.7 10.0	15000 10900	4000 5500	60 60	—	—		
6AB4	High-Mu Triode	B0	5CE	H	6.3	0.15	Class A Amplifier	100 250	Cath. Res., 270 ohms Cath. Res., 200 ohms	3.7 10.0	15000 10900	4000 5500	60 60	—	—		
6AB5/ 6NS	Electron-Ray Tube Indicator Type	D4	6R	H	6.3	0.15	Visual Indicator	Plate & Target Supply = 135 volts. Triode Plate Resistor = 0.25 meg. Target Current = 2.0 ma. Grid Bias, - 10.0 volts; Shadow Angle, 0°. Bias, 0 volts; Angle, 90°; Plate Current, 0.5 ma. Plate & Target Supply = 135 volts. Triode Plate Resistor = 1.0 meg. Target Current = 1.9 ma. Grid Bias, - 15.5 volts; Shadow Angle, 0°. Bias, 0 volts; Angle, 90°; Plate Current, 0.13 ma.									
6AB7	Remote-Cutoff Pentode	B2	6N	H	6.3	0.45	Class A Amplifier	300	- 3.0	200	3.2	12.5	700000	5000	—	—	
6AC5-GT	High-Mu Power Amplifier Triode	C2b	G-5Q1	H	6.3	0.4	Class B Amplifier	250	0	—	5.0	—	—	—	10000	8.0	
							Dynamic-Coupled Amplifier With 76 Driver	250	Bias for both 6AC5-GT and 76 is developed in coupling circuit. Average Plate Current of Driver = 3.5 milliamperes. Average Plate Current of 6AC5-GT = 32 milliamperes.								
6AC7	Sharp-Cutoff Pentode	B2	6N	H	6.3	0.45	Class A Amplifier	300	Cath. Bias	150	2.5	10.0	1.0	9000	—	Cathode-Bias Resistor, 160 ohms	
6AD6-G	Electron-Ray Tube Indicator Type	B5a	7AC	H	6.3	0.15	Visual Indicator	Target Voltage, 100 volts. Control-Electrode Voltage, - 23 volts; Shadow Angle, 135°. Target Current, 0.8 ma. Control-Electrode Voltage, - 45 volts; Angle, 0°. Target Current, 1.5 ma. Target Voltage, 150 volts. Control-Electrode Voltage, - 50 volts; Shadow Angle, 135°. Target Current, 1.2 ma. Control-Electrode Voltage, 75 volts; Angle, 0°. Target Current, 3 ma.									

Discontinued types are shown in light face.



Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma.	Plate Current Ma.	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Vdls	Amp.											
6AD7-G	Triode-Power Amplifier Pentode	D10	8AY	H	6.3	0.85	Triode Unit as Class A Amplifier	250	-25.0	—	—	3.7	19000	325	6	—	—
							Pentode Unit as Class A Amplifier	250	-16.5	250	6.5	34.0	80000	2500	—	7000	3.2
							Pentode Unit With 6F6-G as Push-Pull Class AB ₁ Amplifier	375	Cath. Bias	250	6.7	41.0	Cathode-Bias Resistor, 470 ohms		16000	9.0	
6AE5-GT	Amplifier Triode	C5	G-6Q1	H	6.3	0.3	Class A Amplifier	95	-15.0	—	—	7.0	3500	1200	4.2	—	—
6AE6-G	Twin-Plate Control Tube	D3	7AH	H	6.3	0.15	Remote Cutoff Triode	250	-1.5	—	—	6.5	25000	1000	25	—	—
							Remote Cutoff Triode	250	-1.5	—	—	4.5	35000	950	33	—	—
							Class A Amp. AA	250	-9.5	—	—	10.0	4650	3000	14	—	—
6AE7-GT	Twin-Input Triode Amplifier	C2b	G-7AX	H	6.3	0.5	Class A Amp. AA Driver For Push-Pull 6AC5-GT In Dynamic-Coupled Amplifier	250	Bias for both 6AC5-GT and 6AE7-GT developed in coupling circuit. Zero-Signal Plate Current of 6AE7-GT = 10 milliamperes. Zero-Signal Plate Current of 6AC5-GT = 64 milliamperes. Power Output in for two 6AC5-GT at stated plate-to-plate load.				10000	9.5			
6AF4	UHF Oscillator Triode	B0	7DK	H	6.3	0.225	Class A Amplifier	100	Cathode Bias Res., 150 ohms		16	2270	6600	15	—	—	
							Oscillator at 950 Mc.	100	Grid Bias Volts, -4 Grid Res., 10000 ohms		22	2130	7500	16	Grid Current (Approx.), 400 pump Useful Power Output, 160 milliwatts		
6AF4-A	Medium-Mu Triode	A1	7DK	H	6.3	0.225	Class A Amplifier Oscillator at 950 Mc.	For other characteristics, refer to type 6AF4									
6AF6-G	Electron-Ray Tube Twin Indicator Type	B0c	7AG	H	6.3	0.15	Visual Indicator	Target Voltage, 125 volts. Control-Electrode Voltage, 0 volts; Shadow Angle, 95°; Target Current, 0.65 ma. Control-Electrode Voltage, 80 volts; Angle, 0°.									
								Target Voltage, 250 volts. Control-Electrode Voltage, 0 volts; Shadow Angle, 95°; Target Current, 2.2 ma. Control-Electrode Voltage, 160 volts. Angle, 0°.									
6AG5	Sharp-Cutoff Pentode	B0	7BD	H	6.3	0.3	As Pentode Class A Amplifier	100	Cath. Bias	100	1.4	4.5	600000	4500	Cath. Bias Res., 180 ohms	—	—
							As Triode Class A Amplifier	250	Cath. Bias	150	2.0	6.5	800000	5000	Cath. Bias Res., 180 ohms	—	—
							As Triode Class A Amplifier	250	Cath. Bias	—	—	7.0	8000	5700	Cath. Bias Res., 330 ohms	—	—
6AG7	Power Pentode	C2	8Y	H	6.3	0.65	Class A Amplifier 4-Mc. Bandwidth Video Circuit	300	Cath. Bias	125	7.0	28.0	Cathode-Bias Resistor, 57 ohms. Load Resistance, 3500 ohms. Peak-to-Peak Volts Output, 140 approx.				
							—	—	—	—	—	—	—	—	—	—	—

6AH4-GT	Medium-Mu Triode	C2b	8EL	H	6.3	0.75	Vertical Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 500		Max. Peak Positive Pulse Plate Volts, 2000								
								Max. DC Cathode Ma., 60		Max. Plate Dissipation, 7.5 watts								
6AH6	Sharp-Cutoff Pentode	D3	7BK	H	6.3	0.45	Class A Amplifier	300	Cath. Bias	150	2.5	10.0	500000	9000	Cath. Res., 160 ohms	—	—	
6AK5	Sharp-Cutoff Pentode	A1	7BD	H	6.3	0.175	Class A Amplifier	120	Cath. Bias	120	2.5	7.5	300000	5000	Cath. Res., 180 ohms	—	—	
6AK6	Power Amplifier Pentode	D3	7BK	H	6.3	0.15	Class A Amplifier	180	—	9.0	180	2.5	15	200000	2300	—	10000	1.1
6AL5	Twin Diode	A1	6BT	H	6.3	0.3	Detector Rectifier	Max. Peak Inverse Volts, 330		Max. DC Output Ma. per Plate, 9								
								Max. Peak Plate Ma. per Plate, 54		Max. Peak Heater-Cathode Volts, 330								
6AL7-GT	Electron-Ray Tube Indicator Type	C0a	8CH	H	6.3	0.15	Visual Indicator	Target Voltage, 315 volts		Grid Voltage for Pattern Cutoff, -7 volts approx.								
								Grid Voltage = 0 volts		Deflecting Electrodes—No. 1, No. 2 and No. 3								
								Cathode Bias Res., 3300 ohms approx.		Voltage (0-80)								
6AM8	Diode—Sharp-Cutoff Pentode	B0a	2T	H	6.3	0.45	Diode Unit	Max. DC Plate Ma., 5		Max. Peak Heater-Cathode Volts, ±200								
							DC Volts Not to Exceed, +100											
							Pentode Unit as Class A Amplifier	200	Cath. Bias	150	2.7	11.5	—	7000	Cath. Bias Res., 120 ohms	—	—	
6AN8	Triode—Sharp-Cutoff Pentode	B0a	9DA	H	6.3	0.45	Triode Unit as Class A Amplifier	200	—	6	—	—	13.0	5750	3300	19	—	
							Pentode Unit as Class A Amplifier	200	Cath. Bias	150	2.8	9.5	300000	6200	—	Cath. Res., 180 ohms	—	—
6AQ5	Beam Power Tube	B1	7DZ	H	6.3	0.45	Single Tube Class A Amplifier	180	-8.5	180	3.0	29.0	58000	3700	—	5500	2.0	
							Push-Pull Class AB ₁ Amplifier	250	-12.5	250	4.5	45.0	52000	4100	—	5000	4.5	
							Triode Unit as Class A Amplifier	250	-15.0	250	5.0	70.0	60000	—	—	10000	10.0	
6AQ6	Twin-Diode High-Mu Triode	D0	7BT	H	6.3	0.15	Triode Unit as Class A Amplifier	100	-1.0	—	—	0.8	61000	1150	70	—	—	
								250	-3.0	—	—	1.0	58000	1200	70	—	—	
6AQ7-GT	Twin-Diode High-Mu Triode	C2b	8CK	H	6.3	0.3	Triode Unit as Class A Amplifier	250	-2	—	—	2.3	44000	1600	70	—	—	
6AR5	Power Pentode	B1	6CC	H	6.3	0.4	Class A Amplifier	250	-16.5	250	5.7	34.0	65000	2400	—	7000	3.2	
								250	-18	250	5.5	32.0	68000	2300	—	7600	3.4	
6AS5	Beam Power Tube	B1	7CV	H	6.3	0.8	Class A Amplifier	150	-8.5	110	2.0	35	—	5600	—	4500	2.2	
6AS7-G	Low-Mu Twin Power Triode	E2	8BD	H	6.3	2.5	DC Amplifier	135	Cath. Res., 250 ohms		125	280	7000	2.0	—	—		
							Booster Tube for Television Scanning	Max. Peak Inverse Plate Volts, 1700		Max. Peak Plate Current (Per Plate), 125 ma								
								Max. Heater—Cathode Volts, ±300		Max. Plate Dissipation (Per Plate), 13 watts								
6AS8	Diode—Sharp-Cutoff Pentode	B0a	9DS	H	6.3	0.45	Diode Unit	Max. Peak Inverse Plate Volts, 330		Max. Average Plate Ma., 5.0								
							Max. Peak Plate Ma., 50											
							Pentode Unit as Class A Amplifier	200	Cath. Bias	150	3.0	9.5	300000	6200	Cath. Res., 180 ohms	—	—	
6AT6	Twin-Diode High-Mu Triode	B0	7BT	H	6.3	0.3	Triode Unit as Class A Amplifier	100	-1.0	—	—	0.8	54000	1300	70	—	—	
								250	-3.0	—	—	1.0	58000	1260	70	—	—	

Discontinued types are shown in light face.

RCA Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use <small>Values to right show operating conditions and characteristics for indicated typical use</small>	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma.	Plate Current Ma.	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
6AT8	Triode-Pentode Converter	B0a	9AK	H	6.3	0.45	Triode Unit as 250-Mc. Oscillator	150	Grid Resistor, 2700 ohms		Plate Current, 13 ma. Power Output (Approx.), 0.5 watt						
							Pentode Unit as Mixer	150	Grid-No. 2 Volts, 150		Osc. Volts at Mixer Grid-No. 1 (RMS), 2.6 Mixer Grid-No. 1 Resistor, 120000 ohms Conversion Transconductance, 2100 umhos						
6AU4-GT	Half-Wave Rectifier	C10a	4CG	H	6.3	1.8	Television Damper Service	Max. Peak Inverse Plate Volts, 4500 (Absolute)				Max. Plate Dissipation, 6.0 watts					
6AU4-GTA	Half-Wave Rectifier	C10b	4CG	H	6.3	1.8	Television Damper Service	Max. Peak Inverse Plate Volts, 4500 (Absolute)				Max. Average Plate Ma., 190 Max. Plate Dissipation, 6.0 Watts					
6AU5-GT	Beam Power Tube	C2b	6CK	H	6.3	1.25	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 550; Max. DC Cathode Ma., 110				Max. Peak Positive-Pulse Plate Volts, 5500 Absolute Max. Plate Dissipation, 10 watts					
6AU6	Sharp-Cutoff Pentode	B0	7BK1	H	6.3	0.3	Class A Amplifier	100	Cath. Bias	100	2.1	5.0	500000	3900	Cath. Bias Res., 150 ohms		
6AU7	Medium-Mu Twin-Triode	B0a	9A	H	3.15 6.3	0.6 0.3	Each Unit as Class A Amplifier	100	0	—	—	13	6300	3500	22		
6AV5-GT	Beam Power Tube	C2b	6CK	H	6.3	1.2	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 550; Max. DC Cathode Ma., 110				Max. Peak Positive-Pulse Plate Volts, 5500 Max. Plate Dissipation, 11 watts					
6AW8	High-Mu Triode-Sharp-Cutoff Pentode	B3	7A	H	6.3	0.6	Triode Unit as Class A Amplifier	200	-2	—	—	4	17500	4000	70		
							Pentode Unit as Class A Amplifier	200	Cath. Bias	-150	3.5	13	400000	9000	Cath. Res., 180 ohms		
6AV6	Twin-Diode High-Mu Triode	B0	7BT	H	6.3	0.3	Triode Unit as Class A Amplifier	100	-1.0	—	—	0.5	80000	1250	100		
								250	-2.0	—	—	1.2	62500	1600	100		
6AX4-GT	Half-Wave Rectifier	C2b	20	H	6.3	1.2	Television Damper Service	Max. Peak Inverse Plate Volts, 4000 Max. Peak Plate Ma., 750 Max. DC Plate Ma., 125				Max. Peak Heater-Cathode Volts: -4000** -4300 **DC component must not exceed 900 volts.					
6AX5-GT	Full-Wave Rectifier	C2b	6-6S	H	6.3	1.2	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 450		Max. DC Output Ma., 80		Min. Total Effec. Supply Imped. per Plate, 105					
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 450		Max. DC Output Ma., 125		Min. Value of Input Choke, 10 henries					
6AZ8	Medium-Mu Triode-Semiremote-Cutoff Pentode	B0a	29	H	6.3	0.45	Triode Unit as Class A Amplifier	200	-6	—	—	13	5750	3300	19		
							Pentode Unit as Class A Amplifier	200	Cath. Bias	150	3	9.5	300000	6000	Cath. Res., 180 ohms		

6B4-G	Power Amplifier Triode	E2	0-85g	F	6.3	1.0	Class A Amplifier	250	-45.0	—	—	60.0	800	5250	4.2	2500	3.20
							Push-Pull Class AB ₂ Amplifier	325	Cath. Bias, 850 ohms	—	—	80.0	—	—	—	5000	10.0†
								325	-68 volts, fixed bias	—	—	80.0	—	—	3000	15.0†	
6B5	Direct-Coupled Power Amplifier	D12	6AS	H	6.3	0.8	Class A Amplifier	For other characteristics, refer to Type 6N6-G.									
6B6-G	Twin-Diode High-Mu Triode	D8	0-7V1	H	6.3	0.3	Triode Unit as Amplifier	For other characteristics, refer to Type 6SQ7.									
6B7	Twin-Diode Remote-Cutoff Pentode	D9	7D	H	6.3	0.3	Pentode Unit as Amplifier	Input Triode: Plate Volts, 300 max; Grid Volts, 0; Plate Ma., 8; AF Signal Volts (Peak), 21 Output Triode: Plate Volts, 300 max.; Plate Ma., 45; Plate Res., 24000 ohms; Load Resistance, 7000 ohms; Power Output, 4 watts.									
6B7S																	
6B8	Twin-Diode Pentode	C1	8E	H	6.3	0.3	Pentode Unit as Amplifier	For other characteristics, refer to Type 12C8.									
6B8-G	Twin Diode-Remote-Cutoff Pentode	D8	0-8E1	H	6.3	0.3	Pentode Unit as RF Amplifier	100	-3.0	100	1.7	5.8	300000	950			
							Pentode Unit as AF Amplifier	250	-3.0	125	2.3	9.0	600000	1125			
							90	Cath. Bias, 3300 ohms	Screen Resistor = 1.1 meg.		Grid Resistor, **/Gain per stage = 55		Gain per stage = 79				
							300	Cath. Bias, 1600 ohms	Screen Resistor = 1.2 meg.		Grid Resistor, **/Gain per stage = 55		Gain per stage = 79				
6BA6	Remote-Cutoff Pentode	B0	7BK1	H	6.3	0.3	Class A Amplifier	100	Cath. Bias	100	4.4	10.8	250000	4300	Cath. Bias Res., 68 ohms		
							250	—	100	4.2	11.0	1.0	4400	Cath. Bias Res., 68 ohms			
6BA7	Pentagrid Converter A	B3	8GT	H	6.3	0.3	Converter	100	-1.0	100	10.2	3.6	500000	Grid-No. 1 Resistor, 20000 ohms			
							250	-1.0	100	10.0	3.8	1.0	1.0	Conversion Transcond., 950 micromhos			
6BC4	Medium-Mu Triode	A1b	9DR	H	6.3	0.225	Class A Amplifier	150	Cath. Bias	—	—	14.5	4800	10000	48	Cath. Res., 100 ohms	
6BC5	Sharp-Cutoff Pentode	B0	7B0	H	6.3	0.3	Class A Amplifier	250	Cath. Bias	150	2.1	7.5	800000	5700	Cath. Bias Res., 180 ohms		
6BC7	Triple Diode	B0a	9D	H	6.3	0.45	DC Restorer in Color TV	Each Diode: (Max. Peak Inverse Plate Volts, 300 Max. Peak Plate Ma., 54)				Max. Average Plate Ma., 12					
6BD4	Sharp-Cutoff Beam Triode	E0	26	H	6.3	0.6	Voltage-Control	Max. DC Plate Volts, 20000 Max. Unregulated DC Supply Volts, 40000				Max. DC Plate Ma., 1.5 Max. Plate Dissipation, 20.0 watts					
6BD4-A	Sharp-Cutoff Beam Triode	E0	27	H	6.3	0.6	Voltage-Control	Max. DC Plate Volts, 27000 Max. Unregulated DC Supply Volts, 55000				Max. DC Plate Ma., 1.5 Max. Plate Dissipation, 25.0 watts					
6BD6	Remote-Cutoff Pentode	B0	7CC	H	6.3	0.3	Class A Amplifier	100	-1	100	5.0	13.0	150000	2550			
							250	-3	100	3.0	9.0	800000	2000				
6BE6	Pentagrid Converter A	B0	7CH	H	6.3	0.3	Converter	100	-1.5	100	7.0	2.6	400000	Grid #1 Resistor, 20000 ohms			
							250	-1.5	100	6.8	2.9	1.0	1.0	Conversion Transcond., 475 micromhos			
6BF5	Beam Power Tube	B1	7B2	H	6.3	1.2	Class A Amplifier	110	-7.5	110	4.0	36.0	12000	7500	2500	1.9	
							Vertical Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 250 Max. DC Cathode Ma., 40				Absolute Max. Peak Positive-Pulse Plate Volts, 900 Max. Plate Dissipation, 5 watts					
6BF6	Twin-Diode Triode	B0	7BT	H	6.3	0.3	Triode Unit as Class A Amplifier	250	-9.0	—	—	9.5	8500	1900	16	Power Output, 300 milliwatts	
6BG6-G	Beam Power Tube	F1	9BT	H	6.3	0.9	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 700 Max. DC Plate Ma., 100				Max. Peak Positive-Pulse Plate Volts, 6000 Max. Plate Dissipation, 20 watts					

Discontinued types are shown in light face.

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values in right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias V _{g1} Volts	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) micromhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
6BH6	Sharp-Cutoff Pentode	B0	7CA1	H	6.3	0.15	Class A Amplifier	100 250	- 1.0 - 1.0	100 150	1.4 2.9	3.6 7.4	700000 1.4g	3400 4600			
6BJ6	Remote-Cutoff Pentode	B0	7CM	H	6.3	0.15	Class A Amplifier	100 250	- 1.0 - 1.0	100 100	3.5 3.3	9.0 9.2	250000 1.3g	3650 2600			
6BK4	Sharp-Cutoff Beam Triode	E2a	34	H	6.3	0.2	Voltage-Control	Max. DC Plate Volts, 25000 Max. Unregulated DC Supply Volts, 55000									
6BK5	Beam Power Tube	B3	35	H	6.3	1.2	Class A Amplifier	250	- 5	250	3.5	35	100000	8500		6500	3.5
6BK7-A	Medium-Mu Twin Triode	B9a	5AJ	H	6.3	0.45	Each Unit as Class A Amplifier	150	Cathode Bias Res., 56 ohms			18	4600	9300	43	Cutoff Volts, -11	
6BL4	Half-Wave Rectifier	D8b	36	H	6.3	3.0	Television Dumper Service	Max. Peak Inverse Plate Volts, 4500 (Abs.) Max. Peak Plate Ma., 1200 Max. DC Plate Ma., 200									
6BL7-GT	Medium-Mu Twin Triode	C2b	88D	H	6.3	1.5	Vertical Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 500 Max. DC Cathode Ma. (Each Unit), 60									
6BQ6-GT	Beam Power Tube	C11	6AM	H	6.3	1.2	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 550 Max. DC Cathode Ma., 110									
6BQ7	Medium-Mu Twin Triode	B0a	0A1	H	6.3	0.4	Each Unit as Class A Amplifier	150	Cathode Bias Res., 220 ohms			9.0	5800	6000	35	Cutoff Volts, -10	
6BQ6-CTB/6CI16	Beam Power Tube	C11	6AM	H	6.3	1.2	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 600 Max. DC Cathode Ma., 112.5									
6BQ7-A	Medium-Mu Twin Triode	B0a	9A1	H	6.3	0.4	Each Unit as Class A Amplifier	150	Cathode Bias Res., 220 ohms			9.0	6100	6400	39	Cutoff Volts, -10	
6BY5-GA	Full-Wave Rectifier	C11b	37	H	6.3	1.6	Television Dumper Service	Max. Peak Inverse Plate Volts, 3000 (Abs.) Max. Peak Plate Ma., 525 Max. DC Plate Ma., 175									
6BY6	Pentagrid Amplifier	B0	7CH	H	6.3	0.3	Syne Separator and Syne Clipper	10	0	25	3.5	1.4	Grid-No. 3 Volts, 0				
6BZ6	Semirectumte-Cutoff Pentode	B0	7CM	H	6.3	0.3	Class A Amplifier	200	Cath. Bias	150	2.6	11	0.6	6100	Cath. Bias Res., 180 ohms		
6BZ7	Medium-Mu Twin-Triode	B0a	0A1	H	6.3	0.4	Each Unit as Class A Amplifier	150	Cathode Bias Res., 220 ohms			10	5600	6800	38	Cutoff Volts, -11	

6C4	HF Power Triode	B3	EBG	H	6.3	0.15	Class A Amplifier	100 250	0 - 8.5			11.8 10.5	6250 7200	3100 2200	19.5 17		
6C5	Medium-Mu Triodes	B2	8Q	H	6.3	0.3	Class A Amplifier	300	- 27.0			25.0	Grid Current, 7 ma. Driving Power, 0.35 watt				5.5
6C5-GT		C3	0T-60g				Bias Detector	250	- 8.0			8.0	10000	2000	20	Grid Resistor, ** 0.25 megohm.	
6C6	Sharp-Cutoff Pentode	D13	6F	H	6.3	0.3	Amplifier Detector	For other characteristics, refer to Type 6J7.									
6C7	Twin-Diode Triode	D9	7A	H	6.3	0.3	Triode Unit as Class A Amplifier	250	- 9.0			4.5	16000	1250	20		
6C8-G	Twin-Triode Amplifier	D8	G-8D	H	6.3	0.3	Each Unit as Amplifier	250	- 4.5			3.2	22500	1600	36		
6CB5	Beam Power Tube	E0a	30	H	6.3	2.5	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 700 Max. DC Plate Ma., 200									
6CB6	Sharp-Cutoff Pentode	B0	7CM	H	6.3	0.3	Class A Amplifier	200	Cath. Bias	150	2.8	9.5	600000	6200	Cath. Bias Res., 180 ohms		
6CD6-G	Beam Power Tube	F1	58T	H	6.3	2.5	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 700 Max. DC Plate Ma., 170									
6CF6	Sharp-Cutoff Pentode	B0	7CM	H	6.3	0.3	Class A Amplifier	200	- 6.5	150	2.8	9.5	600000	6200	Cath. Bias Res., 180 ohms		
6CG7	Medium-Mu Twin-Triode	B3	9AJ	H	6.3	0.6	Horizontal Deflection Oscillator in TV Receivers	Max. DC Plate Volts, 300 Max. Peak Neg. Pulse Grid Volts, 600									
							Vertical Deflection Oscillator in TV Receivers	Max. DC Plate Volts, 300 Max. Peak Neg. Pulse Grid Volts, 400									
6CL6	Power Pentode	B3	25	H	6.3	0.65	Class A Amplifier 1-Mc. Bandwidth Video Circuit	300	- 2	300	7.0	30.0	Load Resistor, 3900 ohms Peak to Peak Grid No. 1 Signal Volts, 3 Peak-to-Peak Output Volts, 132 approx.				
6CM7	Medium-Mu Dual Triode With Dissimilar Units	B3	31	H	6.3	0.6	Vertical Deflection Oscillator in TV Receivers	Unit No. 1: Max. DC Plate Volts, 500 Max. Peak Neg. Pulse Grid Volts, 200									
							Vertical Deflection Amplifier in TV Receivers	Unit No. 2: Max. DC Plate Volts, 500 Max. Peak Positive-Pulse Plate Volts, 2200 (Abs.)									
6CS6	Pentagrid Amplifier	B0	7CH	H	6.3	0.3	Syne Separator and Syne Clipper	10	0	30	4.1	1.2	Grid-No. 3 Volts = 0				
6D6	Remote-Cutoff Pentode	D13	6F	H	6.3	0.3	Amplifier Mixer	For other characteristics, refer to Type 6U7-G.									
6D7	Sharp-Cutoff Pentode	D13	7A	H	6.3	0.3	Amplifier Detector	For other characteristics, refer to Type 6J7.									

Discontinued types are shown in light face.

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts		
		Dimen.	S.C.	C.T.	Volts	Amp.													
6D8-G	Pentagrid Converter	D8	G-8A1	H	6.3	0.15	Converter	135 250	- 3.0 - 3.0	67.5 100	1.7 2.6	1.5 3.5	600000 400000	Anode-Grid (#2): 250 max. volts, 4.3 ma. Oscillator-Grid (#1) Resistor = Conversion Transcond., 550 micromhos.					
6DC6	Semiremote-Cutoff Pentode	B0	7CM	H	6.3	0.3	Class A Amplifier	200	Cath. Bias	150	3.0	9.0	500000	5500	Cath. Res., 180 ohms				
6DE6	Sharp-Cutoff Pentode	D0	7CM	H	6.3	0.3	Class A Amplifier	200	Cath. Bias	150	2.8	9.5	0.6	6200	Cath. Bias Res., 180 ohms				
6E5	Electron-Ray Tube	D4	6R	H	6.3	0.3	Visual Indicator	Plate & Target Supply = 125 volts. Triode Plate Resistor = 1.0 meg. Target Current = 0.8 ma. Grid Bias, -4.0 volts; Shadow Angle, 0°. Bias, 0 volts; Angle, 90°. Plate Current, 0.1 ma. Plate & Target Supply = 250 volts. Triode Plate Resistor = 1.0 meg. Target Current = 2.0 ma. Grid Bias, -7.5 volts; Shadow Angle, 0°. Bias, 0 volts; Angle, 90°. Plate Current, 0.2 ma.											
6E6	Twin-Triode Power Amplifier	D12	7B	H	6.3	0.6	Push-Pull Class A Amplifier	180 250	-20.0 -27.5					Power Output is for one tube at stated plate-to-plate load.		15000 14000	0.75 1.60		
6E7	Remote-Cutoff Pentode	D13	7H	H	6.3	0.3	Amplifier	For other characteristics, refer to Type 6U7-G.											
6F5	High-Mu Triode	C1	5M	H	6.3	0.3	Amplifier	For other characteristics, refer to Type 6SF5.											
6F5-GT	High-Mu Triode	G2b	G-5M, 1	H	6.3	0.3	Amplifier	For other characteristics, refer to Type 6SF5.											
6F6	Power Pentodes	C2	7S	H	6.3	0.7	Pentode Class A Amplifier	250 285	-16.5 -20.0	250 285	6.5 7.0	34.0 38.0	80000 78000	2500 2550		7000 7000	3.2 4.8		
6F6-G							D10	G-7S1	Triode Class A Amplifier	250	-20.0			31.0	2600	2600	6.8	4000	0.85
6F6-GT							C10	G-7S1	Pentode Push-Pull Class A Amplifier	315 315	Cath. Bias -24.0	285 285	12.0 12.0	62.0 62.0	Cath. Bias Resistor, 320 ohms		10000 10000	10.5 11.0	
									Pentode Push-Pull Class AB ₂ Amplifier	375 375	Cath. Bias -26.0	250	8.0 5.0	54.0 34.0	Cath. Bias Resistor, 340 ohms		10000 10000	19.0 18.5	
6F7	D3	7E	H	6.3	0.3	Triode Unit as Class A Amplifier	100	- 3.0 min.			3.5	16000	500	8					
						Pentode Unit as Class A Amplifier	100 250	- 3.0 min.	100 100	1.6 1.5	6.3 6.3	290000 850000	1050 1100						
						Pentode Unit as Mixer	250	-10.0	100	0.6	2.8	Oscillator Peak Volts = 7.0. Conversion Transcond. = 300 micromhos.							
6F8-G	Twin-Triode Amplifier	D1	G-8D	H	6.3	0.6	Each Unit as Amplifier	For other characteristics, refer to Type 6J5.											

28

6G6-G	Power Amplifier Pentode	D1	G-7S1	H	6.3	0.15	Pentode Class A Amplifier	135 180	- 6.0 - 9.0	135 180	2.0 2.5	11.5 15.0	170000 175000	2100 2300		12000 10000	0.6 1.1
6H6	Twin Diodes	A1a	7Q	H	6.3	0.3	Voltage Doubler	Max. AC Supply Volts per Plate (RMS), 150. Min. Total Effect. Plate Supply Imped. per Plate: half-wave, 30 ohms; full-wave, 15 ohms. Max. DC Output Ma., 8. min.									
6H6-GT		C3	G-7Q11	Half-Wave Rectifier	Max. AC Plate Volts (RMS), 150. Min. Total Effective Plate Supply Impedance: up to 117 volts, 15 ohms; at 150 volts, 40 ohms.												
6J5	Medium-Mu Triodes	B2	6Q	H	6.3	0.3	Class A Amplifier	90 250	0 - 8.0			10.0 9.0	6700 7700	3090 2600	20 20		
6J5-GT		C3	G-6Q4														
6J6	Medium-Mu Twin Triode	B0	7BF	H	6.3	0.45	Each Unit as Class A Amplifier	100		Cathode Resistor, for both units, 50 ohms		8.5	7100	5300	38		
6J7	Sharp-Cutoff Pentodes	C1	7H	H	6.3	0.3	Push-Pull Class C Amplifier	150 250	-10.0 - 3.0	Cath. Res., 220 ohms, both units	30.0		Grid Current, 16 ma. Driving Power, 0.35 watt.				3.5
							Pentode Class A AF Amplifier	100 250	- 3.0 - 3.0	100 100	0.5 0.5	2.0 2.0	1.05 1.0 + j	1185 1225			
6J7-G	6J7-GT	D8	G-7H1				Pentode Class A AF Amplifier	250	- 4.3	100		Cathode Current 0.43 ma.		Plate Resistor, 200000 ohms. Grid Resistor, ** 250000 ohms.			
6J8-G		D8	G-8H	H	6.3	0.3	Triode Unit as Oscillator	100 250		Triode-Grid Resistor, 50000 ohms	4.0 5.8		Triode-Grid & Heptode-Grid Current, 0.3 ma. Triode-Grid & Heptode-Grid Current, 0.4 ma.				
6K5-GT		C1	G-5U	H	6.3	0.3	Class A Amplifier	100 250	- 1.5 - 3.0			0.35 1.1	78000 50000	900 1400	70		
6K6-GT	Power Pentode	C2b	G-7S1	H	6.3	0.4	Single-Tube Class A Amplifier	100 250 315	- 7.0 - 18.0 - 21.0	100 250 250	1.6 5.5 4.6	9.0 32.0 25.5	104000 90000 110000	1500 2300 2100		12000 7500 9000	0.35 3.40 4.50
6K7	Remote-Cutoff Pentodes	C1	7R	H	6.3	0.3	Class A Amplifier	100 250	- 1.0 - 3.0	100 125	2.7 2.6	9.5 10.5	150000 600000	1650		12000 12000	10.5 9.8
6K7-GT		C3	G-7R4	Mixer in Superheterodyne	250	-10.0	100			Oscillator Peak Volts = 7.0							
6K8	Triode-Hexode Converters	D8	G-8K1	H	6.3	0.3	Triode Unit as Oscillator	100		Triode-Grid Resistor, 50000 ohms	3.8		Triode-Grid & Hexode-Grid Current, 0.15 ma.				
6K8-GT		C10	G-7K4	Hexode Unit as Mixer	100 250	- 3.0 - 3.0	100 100	6.2 6.0	2.3 2.5	400000 600000	Conversion Transcond., 325 micromhos. Conversion Transcond., 350 micromhos.						
6L5-G	Medium-Mu Triode	D3	G-8U1	H	6.3	0.15	Class A Amplifier	135 250	- 5.0 - 9.0			3.5 8.0	11300 9000	1500 1900	17 17		

Discontinued types are shown in light face.

29



Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use <small>Values in right give operating conditions and characteristics for indicated typical use</small>	Plate Supply Volts	Grid Bias V	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
6L6 6L6-G	Beam Power Tubes	D7	7AC	H	6.3	0.9	Single-Tube Class A Amplifier	250	-14.0	250	5.0	72.0	—	—	—	2500	6.5
							Push-Pull Class A Amplifier	270	-17.5	270	11.0	134.0	—	—	5000	17.5	
							Push-Pull Class AB ₁ Amplifier	360	-22.5	270	5.0	88.0	—	—	6000	26.5	
		E2	G-7AC1				Push-Pull Class AB ₂ Amplifier	360	-18.0	225	3.5	78.0	—	—	6000	31.0	
							Class AB ₂ Amplifier	360	-22.5	270	5.0	88.0	—	—	3800	47.0	
							Single Triode Class A Amplifier	250	-20.0	—	—	40.0	1700	4700	8.0	5000	1.4
6L7 6L7-G	Pentagrid Mixers	C1	7T	H	6.3	0.3	Mixer in Superheterodyne	250	-3.0	100	7.1	2.4	—	—	—	—	—
Class A Amplifier	250	-3.0	100	6.5	5.3	600000	1100	—	—	—	—	—	—	—	—		
6N6-G	Direct-Coupled Power Triode	D10	G-7AU	H	6.3	0.8	Class A Amplifier	250	-3.0	100	6.5	5.3	600000	1100	—	—	—
6N7 6N7-GT	High-Mu Twin Power Triodes	C2	8B	H	6.3	0.8	Class A Amplifier (as Driver)	250	-5.0	—	—	5.0	11300	3100	35	20000	exceeds
Class B Amplifier	294	-6.0	—	—	—	7.0	11000	3200	35	20000	exceeds	0.4	—	—	—		
6P5-GT	Medium-Mu Triode	C2b	G-8Q1	H	6.3	0.3	Amplifier Detector	300	0	—	—	—	—	—	8000	10.0	
6P7-G	Triode-Pentode	D8	G-7U	H	6.3	0.3	Amplifier and Converter	For other characteristics, refer to Type 76.									
6Q7 6Q7-G 6Q7-GT	Twin-Diode High-Mu Triodes	C1	7V	H	6.3	0.3	Triode Unit as Class A Amplifier	100	-1.0	—	—	0.8	58000	1200	70	—	—
Class A Amplifier	250	-3.0	—	—	—	1.1	58000	1200	70	—	—	—	—	—	—	—	
Class B Amplifier	90X Cath. Bias, 7600 ohms. 300X Cath. Bias, 3000 ohms.	Grid Resistor, ** 0.5 megohm		Gain per stage = 32 Gain per stage = 45													
6R7 6R7-G 6R7-GT	Twin-Diode Medium-Mu Triodes	C1	7V	H	6.3	0.3	Triode Unit as Class A Amplifier	250	-9.0	—	—	9.5	8500	1900	16	—	—
Class A Amplifier	90V Cath. Bias, 5400 ohms. 300V Cath. Bias, 5000 ohms.	Grid Resistor, ** 0.22 megohm.		Gain per stage = 11 Gain per stage = 12													
6S4	Medium-Mu Triode	D3	8AC	H	6.3	0.6	Vertical Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 500 Max. DC Cathode Ma., 30 Max. Peak Positive-Pulse Plate Volts, 2000 Max. Plate Dissipation, 7.5 watts									

30

6S4-A	Medium-Mu Triode	D3	8AC	H	6.3	0.6	Vertical Deflection Amplifier in TV Receivers	For other characteristics, refer to Type 6S4.									
6S7 6S7-G	Remote-Cutoff Pentodes	C1	7R	H	6.3	0.15	Class A Amplifier	135	-3.0	67.5	0.9	3.7	1.0	1250	—	—	—
Class A Amplifier	250	-3.0	100	2.0	8.5	1.0	1750	—	—	—	—	—	—	—	—	—	
6S8-GT	Triode-Diode Triode	C9a	8CB	H	6.3	0.3	Triode Unit as Class A Amplifier	100	-1.0	—	—	0.4	110000	900	100	—	—
Class A Amplifier	250	-2.0	—	—	—	0.9	91000	1100	100	—	—	—	—	—	—	—	
6SA7	Pentagrid Converter	B2	8R	H	6.3	0.3	Mixer	100	Self-Excited	100	8.5	3.3	500000	Grid #1 Resistor, 20000 ohms	—	—	—
Class A Amplifier	250	—	100	8.5	3.5	1.0	66000	—	—	—	—	—	Conversion Transcond., 450 micromhos.	—	—	—	
6SA7-GT	Pentagrid Converter	C3	G-8AD	H	6.3	0.3	Mixer	For other characteristics, refer to Type 6SA7.									
6SB7-Y	Pentagrid Converter	D2	8R	H	6.3	0.3	Mixer	100	-1.0	100	10.2	3.6	500000	Grid #1 Resistor, 20000 ohms	—	—	—
Class A Amplifier	250	-1.0	100	10.0	3.8	1.0	500000	—	—	—	—	—	Conversion Transcond., 950 micromhos.	—	—	—	
6SC7	Twin-Triode Amplifier	B2	8S	H	6.3	0.3	Each Unit as Amplifier	250	-2.0	—	—	2.0	53000	1325	70	—	—
6SF5 6SF5-GT	High-Mu Triodes	B2	6AB	H	6.3	0.3	Class A Amplifier	100	-1.0	—	—	0.4	85000	1150	100	—	—
Class A Amplifier	250	-2.0	—	—	—	0.9	66000	1500	100	—	—	—	—	—	—	—	
Class A Amplifier	90X Cath. Bias, 8800 ohms. 300X Cath. Bias, 3200 ohms.	Grid Resistor, ** 0.5 megohm.		Gain per stage = 43 Gain per stage = 63													
6SF7	Diode-Remote-Cutoff Pentode	B2	7AZ	H	6.3	0.3	Pentode Unit as Class A Amplifier	100	-1.0	100	4.3	13.5	200000	1975	—	—	—
Class A Amplifier	250	-1.0	100	4.1	13.9	700000	2050	—	—	—	—	—	—	—	—	—	
6SG7	Remote-Cutoff Pentode	B2	80K	H	6.3	0.3	Class A Amplifier	100	-1.0	100	3.2	8.2	250000	4100	—	—	—
Class A Amplifier	250	-1.0	125	4.4	11.8	900000	4700	—	—	—	—	—	—	—	—	—	
Class A Amplifier	250	-2.5	150	3.4	9.2	1.0 + 1/2	4000	—	—	—	—	—	—	—	—	—	
6SH7	Sharp-Cutoff Pentode	B2	80K	H	6.3	0.3	Class A Amplifier	100	-1.0	100	2.1	5.3	350000	4000	—	—	—
Class A Amplifier	250	-1.0	150	4.1	10.8	900000	4900	—	—	—	—	—	—	—	—	—	
6SJ7 6SJ7-GT	Sharp-Cutoff Pentodes	B2	8N	H	6.3	0.3	Class A Amplifier	100	-3.0	100	0.9	2.9	700000	1575	—	—	—
Class A Amplifier	250	-3.0	100	0.8	3.0	1.0 + 1/2	1650	—	—	—	—	—	—	—	—	—	
Class A Amplifier	90X Cath. Bias, 1700 ohms. 300X Cath. Bias, 860 ohms.	Grid Resistor, ** 0.5 megohm.		Gain per stage = 93 Gain per stage = 167													
6SK7 6SK7-GT	Remote-Cutoff Pentodes	D2	8N	H	6.3	0.3	Class A Amplifier	100	-1.0	100	4.0	13.0	120000	2350	—	—	—
Class A Amplifier	250	-3.0	100	2.6	9.2	800000	2000	—	—	—	—	—	—	—	—	—	
6SL7-GT	High-Mu Twin Triode	C2b	80D	H	6.3	0.3	Each Unit as Class A Amplifier	250	-2.0	—	—	2.3	44000	1600	70	—	—
6SN7-GT	Medium-Mu Twin Triode	C2b	80D	H	6.3	0.6	Each Unit as Class A Amplifier	90	0	—	—	10.0	6700	3000	20	—	—
Class A Amplifier	250	-8.0	—	—	—	9.0	2700	2600	20	—	—	—	—	—	—	—	
Class A Amplifier	90	0	—	—	—	10.0	6700	3000	20	—	—	—	—	—	—	—	
Class A Amplifier	250	-8.0	—	—	—	9.0	2700	2600	20	—	—	—	—	—	—	—	
6SN7-GTA	Medium-Mu Twin Triode	C2b	80D	H	6.3	0.6	Vertical Deflection Amplifier in TV Receivers +	Max. DC Plate Volts, 450 Max. Peak Cathode Ma., 70 Max. Peak Positive Pulse Plate Volts, 1500 Max. Plate Dissipation: 5 watts either plate; 7.5 watts both plates.									

Discontinued types are shown in light face.

31

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating		Use <small>Value in right give operating conditions and characteristics for indicated typical use</small>	Plate Supply Volts	Grid Bias V	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) μ mhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts											
6SN7-GTB	Medium-Mu Twin-Triode	C2b	8DD	H	6.3	0.6	100	-1.0	—	—	0.5	110000	925	100	—	—
6SQ7	Twin-Diode High-Mu Triodes	B2	8Q	H	6.3	0.3	250	-2.0	—	—	1.1	85000	1175	100	—	—
6SQ7-GT	Twin-Diode High-Mu Triodes	C3	GT-8Q	H	6.3	0.3	90x 300x	Cath. Bias, 11000 ohms. Cath. Bias, 3900 ohms.	—	—	—	Grid Resistor, ** 0.5 megohm.	—	—	—	Gain per stage = 40 Gain per stage = 53
6SR7	Duplex-Diode Triode	B2	8Q	H	6.3	0.3	250	-9.0	—	—	9.5	8500	1900	16	10000	0.3
6SS7	Remote-Cutoff Pentode	B2	8N	H	6.3	0.15	100	-1.0	100	3.1	12.2	120000	1930	—	—	—
6ST7	Duplex-Diode Triode	B2	8Q	H	6.3	0.15	100	-1.0	—	—	0.8	61000	1150	70	—	—
6SZ7	Twin-Diode High-Mu Triode	B2	8Q	H	6.3	0.15	250	-3.0	—	—	1.0	58000	1200	70	—	—
6T7-G	Twin-Diode High-Mu Triode	D8	G-7V	H	6.3	0.15	135	-1.5	—	—	0.9	65000	1000	65	—	—
6T8	Triple-Diode High-Mu Triode	D8a	8E	H	6.3	0.45	250	-3.0	—	—	1.2	62000	1050	65	—	—
6U5	Electron-Ray Tube	D4	8R	H	6.3	0.3	100	-1	—	—	0.8	54000	1300	70	—	—
6U7-G	Remote-Cutoff Pentode	D12a	G-7R	H	6.3	0.3	250	-3.0	100	2.2	8.0	250000	1500	—	—	—
6U8	Triode-Remote-Cutoff Pentode	D8a	9AE	H	6.3	0.45	150	Cath. Bias	—	—	18	5000	8500	40	—	Cath. Res., 56 ohms
6V3-A	Half-Wave Rectifier	B1a	3Z	H	6.3	1.75	250	Cath. Bias	110	3.5	10	40000	5200	—	—	Cath. Res., 68 ohms

6V6	Beam Power Tubes	C2	7AC	H	6.3	0.45	180	-8.5	180	3.0	29.0	50000	3700	—	—	3500	2.0
6V6-GT	Beam Power Tubes	C2b	G-7AC	H	6.3	0.45	250	-12.5	250	4.5	45.0	50000	4100	—	—	5000	4.5
6V7-G	Duplex-Diode Triode	D8	G-7V	H	6.3	0.3	315	-13.0	235	2.2	34.0	80000	3750	—	—	8500	5.5
6W4-GT	Half-Wave Rectifier	C2b	4CG	H	6.3	1.2	250	-15.0	250	5.0	70.0	60000	3750	—	—	10000	10.0
6W6-GT	Beam Power Amplifier	C2b	G-7AC	H	6.3	1.2	285	-19.0	285	4.0	70.0	70000	3600	—	—	8000	14.0
6W7-G	Sharp-Cutoff Pentode	D8	G-7R	H	6.3	0.15	250	-3.0	100	0.5	2.0	1.5	1225	—	—	—	—
6X4	Full-Wave Rectifier	B1	6BS	H	6.3	0.6	250	-12.5	1250	3.5	58.0	9300	7000	—	—	2000	3.6
6X5	Full-Wave Rectifiers	C2	6S	H	6.3	0.6	200	-14.0	135	2.2	61.0	18300	7100	—	—	2600	6.0
6X5-GT	Full-Wave Rectifiers	C2b	G-6S	H	6.3	0.6	250	-15.0	250	5.0	70.0	60000	3750	—	—	10000	10.0
6X8	Triode-Pentode Converter	B8a	8AK	H	6.3	0.45	150	Grid Resistor, 2700 ohms Grid Current, 3.6 ma.	—	—	—	Plate Current, 13 ma. Power Output (Approx.), 0.5 watt	—	—	—	—	—
6Y5	Full-Wave Rectifier	D5	6J	H	6.3	0.8	135	-13.5	135	3.5	58.0	9300	7000	—	—	2000	3.6
6Y6-G	Beam Power Tube	D10	G-7AC	H	6.3	1.25	200	-14.0	135	2.2	61.0	18300	7100	—	—	2600	6.0
6Y7-G	Twin-Triode Amplifier	D3	G-8B	H	6.3	0.6	135	0	—	—	—	—	—	—	—	9000	2.5
6Z5	Full-Wave Rectifier	D5	6K	H	6.3	0.8	180	0	—	—	—	—	—	—	—	12000	4.2
6Z7-G	Twin-Triode Amplifier	D3	G-8D	H	6.3	0.3	135	0	—	—	—	—	—	—	—	9000	2.5
6ZY5-G	Full-Wave Rectifier	D3	G-6S	H	6.3	0.3	135	0	—	—	—	—	—	—	—	9000	2.5
7A4	Medium-Mu Triode	D5	5AC	H	6.3	0.3	125	-7.5	110	3.0	40.0	16000	5800	—	—	2500	1.5
7A5	Beam Power Tube	C2a	6AA	H	6.3	0.75	125	-9.0	125	3.3	44.0	17000	6000	—	—	2700	2.2

Discontinued types are shown in light face.



Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use <small>Values to right give operating conditions and characteristics for indicated typical use</small>	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma.	Plate Current Ma.	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) μ mhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dime.	S. C.	C. T.	Volts	Amp.											
7A6	Twin Diode	05	7AJ	H	6.3	0.15	Detector Rectifier	Maximum AC Voltage per Plate.....150 Volts, RMS Maximum DC Output Current per plate.....8 Milliamperes									
7A7	Remote-Cutoff Pentode	B5	8V	H	6.3	0.3	Class A Amplifier	For other characteristics, refer to Type 6SK7.									
7A8	Octode Converter	B5	8U	H	6.3	0.15	Converter	100 250	- 3.0 - 3.0	75 100	2.7 3.2	1.8 3.0	650000 700000	Anode-Grid (#2): 250 μ max. volts, 4.2 ma. Oscillator-Grid (#1) Resistor μ ohms. Conversion Transcond., 550 micromhos.			
7AD7	Power Pentode	C2a	8V	H	6.3	0.6	Class A Amplifier	300	Cath. Bias	150	7.0	28.0	300000	9500	Cath. Res., 68 ohms		
7AF7	Medium-Mu Twin Triode	B5	8AC	H	6.3	0.3	Each Unit as Class A Amplifier	250	-10	---	---	9.0	7600	2100	16		
								100	Cath. Bias	---	---	10.8	6500	2600	17	Cath. Res., 600 ohms	
7AG7	Sharp-Cutoff Pentode	B5	8V	H	6.3	0.15	Class A Amplifier	250	Cath. Bias	250	2.0	6.0	1 meg.	4200	Cathode-Bias Resistor, 250 ohms		
7AH7	Sharp-Cutoff Pentode	B5	8V	H	6.3	0.15	Class A Amplifier	250	Cath. Bias	250	1.9	6.8	1 meg.	3300	Cath. Res., 250 ohms		
7AU7	Medium-Mu Twin Triode	B0a	9A	H	3.5 7.0	0.6 0.3	Each Unit as Class A Amplifier	100 250	0 - 8.5	---	---	13.0 10.5	6300 7950	3500 2200	22 17.5		
7B4	High-Mu Triode	B5	8AG	H	6.3	0.3	Amplifier	For other characteristics, refer to Type 6SF5.									
7B5	Power Amplifier Pentode	C2a	6AE	H	6.3	0.4	Class A Amplifier	For other characteristics, refer to Type 6K6-GT.									
7B6	Twin-Diode High-Mu Triode	B6	6W	H	6.3	0.3	Triode Unit as Amplifier	For other characteristics, refer to Type 6SQ7.									
7B7	Remote-Cutoff Pentode	B5	8V	H	6.3	0.15	Class A Amplifier	250	- 3.0	100	1.7	8.5	750000	1750			
7B8	Pentagrid Converter	B5	8X	H	6.3	0.3	Converter	For other characteristics, refer to Type 6A8.									
7C5	Beam Power Tube	C2a	6AA	H	6.3	0.45	Class A Amplifier	For other characteristics, refer to Type 6V6-GT.									
7C6	Twin-Diode High-Mu Triode	B5	8W	H	6.3	0.15	Triode Unit as Class A Amplifier	250	- 1.0	---	---	1.3	100000	1000	100		
								100	- 3.0	100	0.4	1.8	1.25	1225			
7C7	Sharp-Cutoff Pentode	B5	8V	H	6.3	0.15	Class A Amplifier	100	- 3.0	100	0.4	1.8	1.25	1225			
								250	- 3.0	100	0.5	2.0	2.05	1300			
7E6	Twin-Diode Triode	B5	8W	H	6.3	0.3	Triode Unit as Amplifier	For other characteristics, refer to Type 6R7.									

34

7E7	Twin-Diode Pentode	B5	8AE	H	6.3	0.3	Pentode Unit as Class A Amplifier	100 250	Cath. Bias	100 100	2.7 1.6	10.0 7.5	150000 700000	1600 1300	Cath. Res., 800 ohms Cath. Res., 330 ohms		
7F7	Twin-Triode Amplifier	B5	8AC	H	6.3	0.3	Each Unit as Amplifier	For other characteristics, refer to Type 6SL7-GT.									
7F8	Twin-Triode Amplifier	B0a	8BW	H	6.3	0.3	Each Unit as Class A Amplifier	250	Cathode-Bias Res., 500 ohms		6.0	---	3300	48			
7G7	Sharp-Cutoff Pentode	B5	8V	H	6.3	0.45	Class A Amplifier	250	- 2.0	100	2.0	6.0	800000	4500			
7H7	Sharp-Cutoff Pentode	B5	8V	H	6.3	0.3	Class A Amplifier	100	- 1.5	100	2.6	7.5	350000	4000			
								250	Δ	150	3.2	10.0	800000	4000	Cath. Res., 180 ohms		
7J7	Triode-Heptode Converter	B5	8BL	H	6.3	0.3	Triode Unit as Oscillator	100	Triode-Grid Resistor, 50000 ohms			3.2	Triode-Grid & Heptode-Grid Current, 0.3 ma.				
								250			5.0	Triode-Grid & Heptode-Grid Current, 0.4 ma.					
7K7	Twin-Diode High-Mu Triode	B5	8DF	H	6.3	0.3	Triode Unit as Class A Amplifier	100	- 3.0	100	2.6	1.5	500000	3000	Conversion Transcond., 280 μ mhos.		
								250	- 3.0	100	2.8	1.4	1.55	3100	Conversion Transcond., 290 μ mhos.		
7L7	RF Amplifier Pentode	B5	8V	H	6.3	0.3	Class A Amplifier	100	- 1.0	100	2.4	5.5	100000	3000			
7N7	Twin-Triode Amplifier	C2a	8AC	H	6.3	0.6	Each Unit as Class A Amplifier	100	- 1.5	100	1.5	4.5	1.05	3100			
								250									
7Q7	Pentagrid Converter	B5	8AL	H	6.3	0.3	Converter	100 250	- 2.0 - 2.0	100 100	8.5 8.5	3.3 3.5	500000 1.05	Grid #1 Resistor, 20000 ohms. Conversion Transcond., 550 μ mhos.			
7R7	Twin-Diode Pentode	B5	8AE	H	6.3	0.3	Pentode Unit as Class A Amplifier	100	- 1.0	100	2.2	5.5	350000	3000			
								250	- 1.0	100	2.1	5.7	1.05	3200			
7S7	Triode-Heptode Converter	B5	8BL	H	6.3	0.3	Triode Unit as Oscillator	100	Triode-Grid Resistor, 50000 ohms			3.0	Triode-Grid & Heptode-Grid Current, 0.3 ma.				
								250			5.0	Triode-Grid & Heptode-Grid Current, 0.4 ma.					
7T7	RF Amplifier Pentode	B5	8V	H	6.3	0.45	Class A Amplifier	100	- 2.0	100	3.0	1.9	500000	3000	Conversion Transcond., 500 μ mhos.		
								250	- 2.0	100	3.0	1.8	1.255	3100	Conversion Transcond., 525 μ mhos.		
7V7	RF Amplifier Pentode	B5	8V	H	6.3	0.45	Class A Amplifier	300	---	150	3.9	10.0	300000	5800	Cath. Bias Res., 160 ohms		
7W7	RF Amplifier Pentode	B5	8BJ	H	6.3	0.45	Class A Amplifier	For other characteristics, refer to Type 7V7.									
7X7	Twin-Diode High-Mu Triode	C2a	8BZ	H	6.3	0.3	Triode Unit as Class A Amplifier	100	0	---	---	1.2	85000	1000	85		
								250	- 1.0	---	---	1.9	67000	1500	100		
7Y4	Full-Wave Rectifier	B5	6AB	H	6.3	0.5	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 325		Max. DC Output Ma., 70		Min. Total Effect. Supply Imped. per Plate, 150 ohms.					
								Max. Peak Inverse Volts, 1250		Max. Peak Plate Ma., 180							
7Z4	Full-Wave Rectifier	C2a	5AB	H	6.3	0.9	With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 450		Max. DC Output Ma., 70		Min. Value of Input Choke, 10 henries					
								Max. Peak Inverse Volts, 1250		Max. Peak Plate Ma., 180							
10E	Power Amplifier Triode	E3	4D	F	7.5	1.25	Class A Amplifier	Max. AC Volts per Plate (RMS), 325		Max. DC Output Ma., 100		Min. Total Effect. Supply Imped. per Plate, 75 ohms					
								Max. Peak Inverse Volts, 1250		Max. Peak Plate Ma., 300							
								Max. AC Volts per Plate (RMS), 450		Max. DC Output Ma., 100		Min. Value of Input Choke, 6 henries					
								Max. Peak Inverse Volts, 1250		Max. Peak Plate Ma., 300							
								350	-32.0	---	---	16.0	5150	1550	8.0	11000	0.9
								425	-40.0	---	---	18.0	5000	1600	8.0	10200	1.6

Discontinued types are shown in light face.

35

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
11 12	Detector* Amplifier Triode	D2a D8a	4F 4D	D.C. F	1.1	0.25	Class A Amplifier	90 135	- 4.5 - 10.5	—	—	2.5 3.0	15500 15000	425 440	6.6 5.6	—	—
12A5	Power Amplifier Pentode	D5	7F	H	6.3 12.6	0.6 0.3	Class A Amplifier	100 180	- 15.0 - 25.0	100 180	3.0 8.0	17.0 45.0	30000 35000	1700 2400	—	4500 3300	0.8 3.4
12A7	Rectifier-Pentode	D3	7K	H	12.6	0.3	Pentode Unit as Class A Amplifier Half-Wave Rectifier	135	- 13.5	135	2.5	9.0	102000	975	—	13500	0.55
12A8-GT	Pentagrid Converter	D3	GT-8A	H	12.6	0.15	Converter	Maximum AC Plate Voltage 125 Volts, RMS Maximum DC Output Current 30 Milliampères For other characteristics, refer to Type 6A8.									
12AB5	Beam Power Tube	D3	9CK	H	10.0 15.9	0.225 approx.	Single-Tube Class A Amplifier Push-Pull Class AB ₁ Amplifier	250	Cath. Bias	200	1.6	33.5	Cath. Bias Res., 270 ohms	6000	3.3	—	—
12AH7-GT	Twin Triode	CDa	8BE	H	12.0	0.15	Each Unit as Class A Amplifier	100 180	- 3.6 - 6.5	—	—	3.7 7.6	10300 8400	1550 1500	16 16	—	—
12AL5	Twin-Diode	A1	60T	H	12.6	0.15	Detector Rectifier	For other characteristics, refer to Type 6AL5.									
12AQ5	Beam Power Tube	B1	7B2	H	12.6	0.225	Amplifier	For other characteristics, refer to Type 6V6.									
12AT6	Twin-Diode High-Mu Triode	D0	7DT	H	12.6	0.15	Triode Unit as Class A Amplifier	For other characteristics, refer to Type 6AT6.									
12AT7	High-Mu Twin Triode	BDa	9A	H	6.3 12.6	0.3 0.15	Each Unit as Class A Amplifier	100 250	Cath. Res., 270 ohms Cath. Res., 200 ohms	3.7 10.0	15000 10900	4000 5500	60 60	—	—	—	
12AU6	Sharp-Cutoff Pentode	B0	7BK ₁	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6AU6.									
12AU7	Twin-Triode Amplifier	BDa	9A	H	6.3 12.6	0.3 0.15	Each Unit as Class A Amplifier	100 250	0 - 8.5	—	—	11.8 10.5	6500 7700	3100 2200	20 17.5	—	—
12AV6	Twin-Diode High-Mu Triode	D0	7DT	H	12.6	0.15	Triode Unit as Class A Amplifier	For other characteristics, refer to Type 6AV6.									
12AV7	Medium-Mu Twin Triode	BDa	9A	H	6.3 12.6	0.45 0.225	Each Unit as Class A Amplifier	150	Cathode Bias Res., 56 ohms	18	48000	8500	41	Cutoff Volts, -12	—	—	
12AW6	Sharp-Cutoff Pentode	B0	7CM	H	12.6	0.15	As Pentode Class A Amplifier As Triode Class A Amplifier	For other characteristics, refer to Type 6AG5.									

12AX4-GT	Half-Wave Rectifier	C2b	2D	H	12.6	0.6	Television Damper Service	Mnx. Peak Inverse Plate Volts, 4000 Mnx. Peak Plate Ma., 600 Mnx. DC Plate Ma., 125		Max. Peak Heater-Cathode Volts: -4000** +100 **DC component must not exceed 900 volts							
12AX4-GTA	Half-Wave Rectifier	C2b	2D	H	12.6	0.6	Television Damper Service	For other characteristics, refer to Type 12AX4-GT.									
12AX7	High-Mu Twin Triode	BDa	9A	H	6.3 12.6	0.3 0.15	Each Unit as Class A Amplifier	100 250	- 1.0 - 2.0	—	—	0.5 1.2	80000 62500	1250 1600	100 100	—	—
12AZ7	High-Mu Twin Triode	BDa	9A	H	6.3 12.6	0.45 0.225	Each Unit as Class A Amplifier	100 250	Cath. Bias Res., 270 ohms Cath. Bias Res., 200 ohms	3.7 10.0	15000 10900	4000 5500	60 60	—	—	—	
12B4-A	Low-Mu Triode	B5	33	H	6.3 12.6	0.6 0.3	Vertical Deflection Amplifier in TV Receivers	Mnx. DC Plate Volts, 550 Mnx. Peak Positive-Pulse Plate Volts, 1000 (Abs.) Mnx. Peak Dissipation, 5.5 Watts		Max. Peak Neg. Pulse Grid Volts, 250 Max. Peak Cathode Ma., 105 Max. Average Cathode Ma., 30							
12B8-GT	Triode-Pentode	C1Da	8T	H	12.6	0.3	Triode Unit as Class A Amplifier Pentode Unit as Class A Amplifier	90 90	0 - 3.0	—	—	2.8 7.0	37000 200000	2400 1800	90 —	—	—
12BA6	Remote-Cutoff Pentode	B0	7BK ₁	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6BA6.									
12BA7	Pentagrid Converter	B3	8CT	H	12.6	0.15	Converter	For other characteristics, refer to Type 6BA7.									
12BD6	Remote-Cutoff Pentode	B0	7CC	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6BD6.									
12BE6	Pentagrid Converter	D0	7CH	H	12.6	0.15	Converter	For other characteristics, refer to Type 6BE6.									
12BF6	Twin-Diode Triode	B0	7BT	H	12.6	0.15	Triode Unit as Class A Amplifier	250	- 9.0	—	—	9.5	8500	1900	16	Power Output, 300 milliwatts	
12BH7	Medium-Mu Twin Triode	B3	9A	H	6.3 12.6	0.6 0.3	Vertical Deflection Amplifier in TV Receivers	Mnx. DC Plate Volts, 450 Mnx. DC Plate Ma., 20		Absolute Max. Peak Positive-Pulse Plate Volts, 1500 Max. Plate Dissipation (Each Unit), 3.5 watts							
12BH7-A	Medium-Mu Twin Triode	B3	9A	H	6.3 12.6	0.6 0.3	Vertical Deflection Amplifier in TV Receivers	For other characteristics, refer to Type 12BH7.									
12BQ6-GTB/ 12CU6	Beam Power Tube	C11	6AM	H	12.6	0.6	Horizontal Deflection Amplifier in TV Receivers	Mnx. DC Plate Volts, 600 Mnx. DC Cathode Ma., 112.5		Mnx. Peak Positive-Pulse Plate Volts, 6000 (Abs.) Mnx. Plate Dissipation, 11 Watts							
12BY7	Sharp-Cutoff Pentode	B3	9BF	H	6.3 12.6	0.6 0.3	Class A Amplifier	250	Cath. Bias	150	6	25	110000	12000	Cath. Res., 68 ohms	—	—
12BY7-A	Sharp-Cutoff Pentode	B3	9BF	H	6.3 12.6	0.6 0.3	Class A Amplifier	For other characteristics, refer to Type 12BY7.									
12C8	Twin-Diode Pentode	C1	8E	H	12.6	0.15	Pentode Unit as RF Amplifier Pentode Unit as AF Amplifier	250	- 3.0	125	2.3	10.0	600000	1325	—	—	—

Discontinued types are shown in light face.

90 * Cath. Bias, 1500 ohms. Screen Resistor = 1.1 meg. Grid Resistor, ** Gain per stage = 55
300 * Cath. Bias, 1600 ohms. Screen Resistor = 1.2 meg | 0.5 megohm. | Gain per stage = 79



Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
12CA5	Beam Power Tube	B1	7CV	H	12.6	0.6	Class A Amplifier	110 125	-4 -4.5	110 125	3.5 4.0	32 37	16000 15000	8100 9200	—	3500 4500	1.1 1.5
12F5-GT	High-Mu Triode	C2b	G-5M1	H	12.6	0.15	Amplifier	For other characteristics, refer to Type 6SF5.									
12H6	Twin-Diode	A1a	7Q	H	12.6	0.15	Detector Rectifier	For other ratings, refer to Type 6H6.									
12J5-GT	Medium-Mu Triode	C3	GT-6Q1	H	12.6	0.15	Amplifier	For other characteristics, refer to Type 6J5.									
12J7-GT	Sharp-Cutoff Pentode	C3	GT-7R2	H	12.6	0.15	Amplifier	For other characteristics, refer to Type 6J7.									
12K7-GT	Remote-Cutoff Pentode	C3	GT-7R2	H	12.6	0.15	Amplifier	For other characteristics, refer to Type 6K7.									
12K8	Triode-Hexode Converter	C1	8K	H	12.6	0.15	Oscillator Mixer	For other characteristics, refer to Type 6K8.									
12L6-GT	Beam Power Tube	C2b	G-7AC1	H	12.6	0.6	Class A Amplifier	110 200	-7.5 Δ	110 125	4.0 2.2	49 46	13000 28000	8000 8000	—	2000 4000	2.1 3.8
12Q7-GT	Twin-Diode High-Mu Triode	C3	GT-7V2	H	12.6	0.15	Triode Unit as Amplifier	For other characteristics, refer to Type 6Q7.									
12S8-GT	Triode-Diode High-Mu Triode	C1a	8CB	H	12.6	0.15	Triode Unit as Class A Amplifier	100 250	-1 -2	—	—	0.4 0.9	110000 91000	900 1100	100 100	—	—
12SA7	Pentagrid Converter A	B2	8R	H	12.6	0.15	Mixer	For other characteristics, refer to Type 6SA7.									
12SA7-GT	Pentagrid Converter A	C2b	G-0AD	H	12.6	0.15	Mixer	For other characteristics, refer to Type 6SA7.									
12SC7	Twin-Triode Amplifier	B2	8S	H	12.6	0.15	Each Unit as Class A Amplifier	For other characteristics, refer to Type 6SC7.									
12SF5	High-Mu Triode	B2	8AB	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6SF5.									
12SF5-GT	High-Mu Triode	C2b	G-6AB1	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6SF5.									
12SF7	Diode-Remote-Cutoff Pentode	B2	7AZ	H	12.6	0.15	Pentode Unit as Amplifier	For other characteristics, refer to Type 6SF7.									
12SG7	Remote-Cutoff Pentode	B2	8BK	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6SG7.									
12SH7	Sharp-Cutoff Pentode	B2	8BK	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6SH7.									
12SJ7	Sharp-Cutoff Pentodes	B2 C3	8N GT-8N2	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 6SJ7.									

38

6V6	Beam Power Tube	C2	7AC	H	6.3	0.45	Single-Tube Class A Amplifier	180 250 315	-8.5 -12.5 -13.0	180 250 225	3.0 4.5 2.2	29.0 45.0 34.0	50000 50000 80000	3700 4100 3750	—	5500 5000 8500	2.0 4.5 5.5
6V6-GT	Beam Power Tube	C2b	G-7AC1	H	6.3	0.45	Push-Pull Class AB1 Amplifier	250 285	-15.0 -19.0	250 285	5.0 4.0	70.0 70.0	60000 70000	3750 3600	—	10000 8000	10.0 14.0
6V7-G	Duplex-Diode Triode	D0	G-7V1	H	6.3	0.3	Triode Unit as Amplifier	For other characteristics, refer to Type 85.									
6W4-GT	Half-Wave Rectifier	C2b	4CG	H	6.3	1.2	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 350		Max. DC Output Ma., 125		Max. Peak Plate Ma., 600		Min. Total Effect. Supply Imped. per Plate, 195 ohms			
6W6-GT	Beam Power Amplifier	C2b	G-7AC1	H	6.3	1.2	Vertical Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 300		Max. Plate Dissipation, 7.5 watts		Max. Peak Positive-Pulse Plate Volts, 1200		Max. Peak Negative-Pulse Grid Volts, 250			
6W7-G	Sharp-Cutoff Pentode	D3	G-7R1	H	6.3	0.15	Class A Amplifier	250	-3.0	100	0.5	2.0	1.5	1225	—	—	—
6X4	Full-Wave Rectifier	D1	5B5	H	6.3	0.6	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 325		Max. DC Output Ma., 70		Max. Peak Plate Ma., 210		Total Effect. Supply Imped. per Plate, 520 ohms			
6X5	Full-Wave Rectifier	C2	6S	H	6.3	0.6	With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 450		Max. DC Output Ma., 70		Max. Peak Plate Ma., 210		Min. Value of Input Choke, 10 henries			
6X5-GT	Full-Wave Rectifier	C2b	G-6S1	H	6.3	0.6	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 325		Max. DC Output Ma., 70		Max. Peak Plate Ma., 210		Min. Total Effect. Supply Imped. per Plate, 520 ohms			
6X5-GT	Full-Wave Rectifier	C2b	G-6S1	H	6.3	0.6	With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 450		Max. DC Output Ma., 70		Max. Peak Plate Ma., 210		Min. Value of Input Choke, 10 henries			
6X8	Triode-Pentode Converter	B1a	9AK	H	6.3	0.45	Triode Unit as 250-Mc. Oscillator	150	—	—	—	—	—	—	—	—	—
6X8	Triode-Pentode Converter	B1a	9AK	H	6.3	0.45	Pentode Unit as Mixer	150	—	—	—	—	—	—	—	—	—
6Y5	Full-Wave Rectifier	D3	6J	H	6.3	0.8	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 350		Max. DC Output Ma., 50		Max. Peak Plate Ma., 210		Min. Total Effect. Supply Imped. per Plate, 520 ohms			
6Y6-G	Beam Power Tube	D10	G-7AC1	H	6.3	1.25	Single-Tube Class A Amplifier	135 200	-13.5 -14.0	135 135	3.5 2.2	58.0 61.0	9300 18300	7600 7100	—	2000 2600	3.6 6.0
6Y7-G	Twin-Triode Amplifier	D3	G-8Q1	H	6.3	0.6	Class B Amplifier	For other characteristics, refer to Type 70.									
6Z5	Full-Wave Rectifier	D3	6K	H	6.3	0.8	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 230		Max. DC Output Ma., 60		Max. Peak Plate Ma., 210		Min. Total Effect. Supply Imped. per Plate, 520 ohms			
6Z7-G	Twin-Triode Amplifier	D3	G-8Q1	H	6.3	0.3	Class B Amplifier	135 180	0 0	—	—	—	—	—	—	—	—
6Z7-G	Twin-Triode Amplifier	D3	G-8Q1	H	6.3	0.3	Class B Amplifier	Power Output is for one tube at stated plate-to-plate load.									
6ZY6-G	Full-Wave Rectifier	D3	G-8Q1	H	6.3	0.3	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 325		Max. DC Output Ma., 40		Max. Peak Plate Ma., 120		Min. Total Effect. Supply Imped. per Plate, 225 ohms			
6ZY6-G	Full-Wave Rectifier	D3	G-8Q1	H	6.3	0.3	With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 450		Max. DC Output Ma., 40		Max. Peak Plate Ma., 120		Min. Value of Input Choke, 13.5 henries			
7A4	Medium-Mu Triode	B5	6AC1	H	6.3	0.3	Amplifier	For other characteristics, refer to Type 6J5.									
7A5	Beam Power Tube	C2a	6AA	H	6.3	0.75	Class A Amplifier	110 125	-7.5 -9.0	110 125	3.0 3.3	46.0 44.0	16000 17000	5800 6000	—	2500 2700	1.5 2.2

Discontinued types are shown in light face.

39

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dimen.	S. C.	C. T.	Volts	Amp.											
14F8	Medium-Mu Twin Triode	80b	8BW	H	12.6	0.15	Each Unit as Class A Amplifier	250	Cathode Bias Res., 500 ohms		6.0	—	3300	48	—	—	
14H7	Remote-Cutoff Pentode	B5	8V	H	12.6	0.15	Class A Amplifier	For other characteristics, refer to Type 7H7.									
14J7	Triode-Heptode Converter	B5	8DL	H	12.6	0.15	Converter	For other characteristics, refer to Type 7J7.									
14N7	Twin-Triode Amplifier	C2a	8AC	H	12.6	0.3	Each Unit as Class A Amplifier	For other characteristics, refer to Type 6J5.									
14Q7	Pentagrid Converter	B5	8AL	H	12.6	0.15	Converter	For other characteristics, refer to Type 6SA7.									
14R7	Twin-Diode Pentode	B5	8AE	H	12.6	0.15	Pentode Unit as Class A Amplifier	For other characteristics, refer to Type 7R7.									
15	RF Amplifier Pentode	D9	8F	D.C. H	2.0	0.22	Class A Amplifier	67.5 135	— 1.5 — 1.5	67.5 67.5	0.3 0.3	1.85 800000	650000 750	750	—	—	
19	Twin-Triode Amplifier	D5	8C	D.C. F	2.0	0.26	Amplifier	For other characteristics, refer to Type 1J6-G.									
19BG6-G	Beam Power Tube	F1	8BT	H	18.9	0.3	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 700 Max. DC Plate Current, 100 ma.		Max. Peak Positive-Pulse Plate Volts, 6000 Max. Plate Dissipation, 20 watts							
19J6	Medium-Mu Twin Triode	B0	7BF	H	18.9	0.15	Each Unit as Class A Amplifier	100	Cathode-Bias Res., 50 ohms		8.5	7100	5300	38	—	—	
19T8	Triode-Pentode High-Mu Triode	B0a	9E	H	18.9	0.15	Triode Unit as Class A Amplifier	For other characteristics, refer to Type 6T8.									
19X8	Triode-Pentode Converter	B0a	8AK	H	18.9	0.15	—	For characteristics, refer to Type 6X8.									
20	Power Amplifier Triode	D1	4D	D.C. F	3.3	0.132	Class A Amplifier	90 135	— 16.5 — 22.5	—	—	3.0 6.5	8000 6300	415 525	3.3 3.3	9600 6500	0.845 0.110
22	RF Amplifier Tetrode	E1	4K	D.C. F	3.3	0.132	Screen-Grid RF Amplifier	135	— 1.5	45	0.6*	1.7	725000	375	—	—	
							Screen-Grid RF Amplifier	135	— 1.5	67.5	1.3*	3.7	325000	500	—	—	
							Screen-Grid RF Amplifier	180	— 3.0	90	1.7*	4.0	400000	1600	—	—	
							RF Amplifier	250	— 3.0	90	1.7*	4.0	600000	1050	—	—	
24-A	RF Amplifier Tetrode	E1	8E	H	2.5	1.75	Bias Detector	250	— 5.0 approx.	20 to 45	—	Plate current to be adjusted to 0.1 milliampere with no signal.					
25A6	Power Amplifier Pentode	C2	7S	H	25.0	0.3	Class A Amplifier	95 160	— 15.0 — 18.0	95 120	4.0 6.5	20.0 33.0	45000 42000	2000 2375	—	4500 5000	5.9 2.2

25A6-GT	Power Amplifier Pentode	C3	G-7S1	H	25.0	0.3	Class A Amplifier	For other characteristics, refer to Type 25A6.									
25A7-GT	Rectifier Pentode	C3	8F	H	25.0	0.3	Pentode Unit as Class A Amplifier Half-Wave Rectifier	100	— 15.0	100	4.0	20.5	50000	1800	—	4500	0.77
25AC5-GT	High-Mu Power Amplifier Triode	C3	G-6Q1	H	25.0	0.3	Class B Amplifier Dynamic-Coupled Amp. With Type 6AE5-GT Driver	180	0	—	4.0	—	—	—	—	4800	6.0
25B5	Direct-Coupled Power Amplifier	D9a	8D	H	25.0	0.3	Amplifier	For other characteristics, refer to Type 25N6-G.									
25B6-G	Power Amplifier Pentode	D10	G-7S1	H	25.0	0.3	Class A Amplifier	105 200	— 16.0 — 23.0	105 135	2.0 1.8	48.0 62.0	15500 18000	4800 5000	—	1700 2500	2.4 7.1
25B8-GT	Triode-Pentode	C3	8T	H	25.0	0.15	Triode Unit as Class A Amplifier Pentode Unit as Class A Amplifier	100	— 1.0	—	—	0.6	75000	1500	112	—	—
25BQ6-GT	Beam Power Tube	C11	6AM	H	25.0	0.3	Horizontal Deflection Amplifier in TV Receivers	100	— 3.0	100	2.0	7.6	185000	2000	—	—	—
25BQ6-GTB/ 25CU6	Beam Power Tube	C11	6AM	H	25.0	0.3	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 600 Max. DC Cathode Ma., 112.5		Absolute Max. Peak Positive-Pulse Plate Volts, 6000 Max. Plate Dissipation, 11 Watts							
25C6-G	Beam Power Tube	D10	G-7AC1	H	25.0	0.3	Class A Amplifier	For other characteristics, refer to Type 8Y6-G.									
25CA5	Beam Power Tube	D1	7CV	H	25.0	0.3	Class A Amplifier	110 125	— 4.0 — 4.5	110 125	3.5 4.0	32 37	16000 15000	8100 9200	—	3500 4500	1.1 1.5
25CD6-GA	Beam Power Tube	F1	6BT	H	25	0.6	Horizontal Deflection Amplifier in TV Receivers	Max. DC Plate Volts, 700 Max. DC Plate Ma., 170		Max. Peak Positive-Pulse Plate Volts, 6000 Max. Plate Dissipation, 15 Watts							
25L6	Beam Power Tube	C2	7AC	H	25.0	0.3	Amplifier	110 200	— 7.5 — 8.0	110 110	4.0 2.0	49.0 50.0	13000 30000	9000 9500	—	2000 3000	2.1 4.3
25L6-GT	Beam Power Tube	C2b	G-7AC1	H	25.0	0.3	Amplifier	For other characteristics, refer to Type 50L6-GT.									
25N6-G	Direct-Coupled Power Amplifier	D9	G-7W	H	25.0	0.3	Class A Amplifier	Output Triode: Plate Volts, 180; Plate Ma., 46; Load, 4000 ohms. Triode: Plate Volts, 100; Grid Volts, 0; A-F Signal Volts (Peak), 29.7; Plate Ma., 5.8.									
25W4-GT	Half-Wave Rectifier	C2b	4C0	H	25.0	0.3	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 350 Max. Peak Inverse Volts, 2000 φ, 1250		Max. DC Output Ma., 175 Max. Peak Plate Ma., 600		Min. Total Effect. Supply Imped. per Plate, 145 ohms					
25Y5	Rectifier-Doubler	D5	6E	H	25.0	0.3	Half-Wave Rectifier	Max. AC Volts per Plate (RMS), 235 Max. DC Output Ma. per Plate, 75		Min. Total Effective Plate-Supply Impedance per Plate, 0 ohms.							
25Z5	Rectifier-Doubler	D5	6E	H	25.0	0.3	Rectifier-Doubler	For other ratings, refer to Type 25Z6.									

Discontinued types are shown in light face.

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Volts	Screen Supply Volts	Screen Current mA	Plate Current mA	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) μ hos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dir. S. C.	G. T.	Volts	Amp.												
25Z6 25Z6-GT	Vacuum Rectifier-Doublers	C2	7Q	H	25.0	0.3	Voltage Doubler	Max. AC Volts per Plate (RMS), 117		Min. Total Effective Plate-Supply Impedance: Half-Wave, 30 ohms; Full-Wave, 15 ohms.							
	Amplifier Triode	C2b	G-7Q1	H	25.0	0.3	Half-Wave Rectifier	Max. AC Volts per Plate (RMS), 235		Min. Total Effect. Supply Imped. per Plate: Up to 117 volts, 15 ohms; at 150 volts, 40 ohms; at 235 volts, 100 ohms.							
26	Amplifier Triode	D12	4D	F	1.5	1.05	Class A Amplifier	90 180	- 7.0 - 14.5	—	—	2.9 6.2	8900 7300	935 1150	8.3 8.3	—	—
27	Detector* Amplifier Triode	D5	5A1	H	2.5	1.75	Class A Amplifier	135 250	- 9.0 - 21.0	—	—	4.5 5.2	9000 9250	1000 975	9.0 9.0	—	—
							Bias Detector	250	- 30.0 approx.	—	—	Plate current to be adjusted to 0.2 milliamperes with no signal.					
30	Medium-Mu Triode	D5	4D	D.C. F	2.0	0.06	Amplifier	For other characteristics, refer to Type 1H4-G.									
31	Power Amplifier Triode	D5	4D	D.C. F	2.0	0.13	Class A Amplifier	135 180	- 22.5 - 30.0	—	—	8.0 12.3	4100 3600	925 1050	3.8 3.8	7000 5700	0.185 0.375
							Screen-Grid RF Amplifier	135 180	- 3.0 - 3.0	67.5 67.5	0.4 0.4	1.7 1.7	950000 1.0 + ξ	640 650	Plate current to be adjusted to 0.2 milliamperes with no signal.		
32	RF Amplifier Tetrode	E1	4K	D.C. F	2.0	0.06	Bias Detector	180	- 6.0 approx.	67.5	—	Plate current to be adjusted to 0.2 milliamperes with no signal.					
							Amplifier Unit as Class A Amplifier	90 90	- 5.0 - 7.0	90 90	3.0 2.0	38.0 27.0	15000 17000	6000 4800	—	2600 2600	0.8 1.0
32L7-GT	Rectifier-Beam Power Amplifier	C3	8Z	H	32.5	0.3	Half-Wave Rectifier	Maximum AC Plate Voltage..... 125 Volts, RMS Maximum DC Output Current..... 60 Milliamperes.									
33	Power Amplifier Pentode	D12	5K	D.C. F	2.0	0.26	Class A Amplifier	180	- 18.0	189	5.0	22.0	55000	1700	—	6000	1.5
34	Remote-Cutoff Pentode	E1	4M	D.C. F	2.0	0.66	Screen-Grid RF Amplifier	135 180	- 3.0 min.	67.5 67.5	1.0 1.0	2.8 2.8	600000 1.0 ξ	600 620	—		
							Screen-Grid RF Amplifier	180 250	- 3.0 min.	90 90	2.5* 2.5*	6.3 6.5	300000 400000	1020 1050	—		
35	Remote-Cutoff Tetrode	E1	5E	H	2.5	1.75	Class A Amplifier	110	- 7.5	110	3.0	40.0	13000	5800	—	2500	1.5
35A5	Beam Power Tube	C2a	5AA	H	35.0	0.15	Single-Tube Class A Amplifier	For other characteristics, refer to Type 35L6-GT.									
35B5	Beam Power Tube	B1	7BZ	H	35.0	0.15	Class A Amplifier	For other characteristics, refer to Type 35C5.									
35C5	Beam Power Tube	B1	7CV	H	35.0	0.15	Class A Amplifier	110	- 7.5	110	3.0	40.0	13000	5800	—	2500	1.5
35L6-GT	Beam Power Tube	C2b	G-7AC1	H	35.0	0.15	Single-Tube Class A Amplifier	110 200	- 7.5 Δ	110 125	3.0 2.0	40.0 43.0	13000 34000	5800 6100	—	2500 5000	1.5 3.0

42

35W4	Half-Wave Rectifier Heater Tap for Pilot	B1	5BQ	H	35.0	0.15	With Capacitive-Input Filter	Max AC Plate Volts (RMS), 117 Min. Total Effect. Plate-Supply Impedance, 15 ohms. Max. DC Output Ma., With Pilot and No Shunt Res., 60; With Pilot and Shunt Res., 90; Without Pilot, 100.									
35Y4	Half-Wave Rectifier Heater Tap for Pilot	C2a	5AL	H	35.0	0.15	With Capacitive-Input Filter	For other characteristics, refer to Type 35W4									
35Z3	Half-Wave Rectifier	C2a	4Z	H	35.0	0.15	With Capacitive-Input Filter	For other ratings, refer to Type 35Z4-GT.									
35Z4-GT	Half-Wave Rectifier	C2b	G-5AA	H	35.0	0.15	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 235 Min. Total Effective Plate-Supply Impedance: Up to 117 volts, 15 ohms; at 235 volts, 100 ohms. Max. DC Output Ma., With Pilot and No Shunt Res., 60; With Pilot and Shunt Res., 90; Without Pilot, 100.									
35Z5-GT	Half-Wave Rectifier Heater Tap for Pilot	C2b	G-5AD	H	35.0	0.15	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 235 Min. Total Effect. Plate-Supply Imped.: Up to 117 volts, 15 ohms; at 235 volts, 100 ohms. Max. DC Output Ma.: With Pilot and No Shunt Res., 60; With Pilot and Shunt Res., 90; Without Pilot, 100.									
36	RF Amplifier Tetrode	D8	5E	H	6.3	0.3	Screen-Grid RF Amplifier	100 250	- 1.5 - 3.0	55 90	1.7*	3.2	55000 55000	850 1080	—		
							Bias Detector	100 250	- 5.0 - 8.0	55 90	—	—	Grid bias values are approximate. Plate current to be adjusted to 0.1 milliamperes with no signal.				
37	Detector* Amplifier Triode	D5	5A1	H	6.3	0.3	Class A Amplifier	90 250	- 5.0 - 18.0	—	—	2.5 7.5	11500 8400	800 1100	9.2 9.2	—	
							Bias Detector	90 250	- 10.0 - 28.0	—	—	Grid bias values are approximate. Plate current to be adjusted to 0.2 milliamperes with no signal.					
38	Power Amplifier Pentode	D9	5F	H	6.3	0.3	Class A Amplifier	100 250	- 9.0 - 25.0	100 250	1.2 3.8	7.0 22.0	14000 10000	875 1200	—	15000 10000	0.27 2.50
39/44	Remote-Cutoff Pentode	D9	5F	H	6.3	0.3	Class A Amplifier	90 250	(- 3.0) min. - 3.0	90 90	1.6 1.4	5.6 5.8	40000 1.0 ξ	1000 1050	—		
40	Medium-Mu Triode	D12	4D	D.C. F	5.0	0.25	Class A Amplifier	135* 180*	- 1.5 - 3.0	—	—	0.2 0.2	15000 15000	200 200	30 30	—	
41	Power Amplifier Pentode	D5	6B	H	6.3	0.4	Amplifier	For other characteristics, refer to Type 6K6-GT.									
42	Power Amplifier Pentode	D12	6B	H	6.3	0.7	Amplifier	For other characteristics, refer to Type 6F6-G.									
43	Power Amplifier Pentode	D12	6B	H	25.0	0.3	Amplifier	For other characteristics, refer to Type 25A6.									
45	Power Amplifier Triode	D12	4D	F	2.5	1.5	Class A Amplifier	180 275	- 31.5 - 36.0	—	—	31.0 36.0	1650 1700	2425 2050	3.5 3.5	2700 4600	0.82 2.00
							Push-Pull Class AB1 Amplifier	275	Cath. Bias, 775 ohms \uparrow - 68.0 volts, fixed bias	—	—	36.0 \uparrow 28.0 \uparrow	—	—	5060 3200	12.0 \uparrow 18.0 \uparrow	
45Z3	Half-Wave Rectifier	B0	5AM	H	45.0	0.075	Half-Wave Rectifier	Max. AC Plate Volts (RMS), 117 Min. Total Effect. Plate-Supply Imped., 15 ohms. Max. Peak Inverse Volts, 350 Max. Peak Plate Ma., 390									
45Z5-GT	Half-Wave Rectifier Heater Tap for Pilot	C2b	G-6AD	H	45.0	0.15	With Capacitive-Input Filter	For other ratings, refer to Type 35Z5-GT.									
46	Dual-Grid Power Amplifier	E3	5C	F	2.5	1.75	Class A Amplifier	250	- 33.0	—	—	22.0	2380	2350	5.6	6400	1.25
							Class B Amplifier	300 400	0 0	—	—	8.0 \uparrow 12.0 \uparrow	—	—	5200 5800	16.0 \uparrow 20.0 \uparrow	

Discontinued types are shown in light face.

43

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating			Use <small>Values to right give operating conditions and characteristics for indicated typical use</small>	Plate Supply Volts	Grid Bias μ Volts	Screen Supply Volts	Screen Current Ma.	Plate Current Ma.	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) μ mhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Dims.	S. C.	C. T.	Volts	Amp.											
47	Power Amplifier Pentode	E3	8B	F	2.5	1.75	Class A Amplifier	250	-16.5	250	6.0	31.0	60000	2500	—	7000	2.7
48	Power Amplifier Tetrode	E3	8A	D.E. H	30.0	0.4	Tetrode	96	-19.0	96	9.0	52.0	—	3800	—	1500	2.0
							Class A Amplifier	125	-20.0	100	9.5	56.0	—	3900	—	1500	2.5
							Tetrode Push-Pull Class A Amplifier	125	-20.0	100	—	100.0 ϕ	—	—	—	3000	5.0 \dagger
49	Dual-Grid Power Amplifier	D12	8C	D.E. F	2.0	0.12	Class A Amplifier	135	-20.0	—	—	6.0	4125	1125	4.7	11000	0.17
							Class B Amplifier	180	0	—	—	4.0 ϕ	—	—	—	12000	3.5 \dagger
50	Power Amplifier Triode	F1A	4D	F	2.5	1.25	Class A Amplifier	300	-54.0	—	—	35.0	2000	1900	3.8	4600	1.6
								400	-70.0	—	—	55.0	1800	2100	3.8	3670	3.4
								450	-84.0	—	—	55.0	1800	2100	3.8	4350	4.6
50A5	Beam Power Tube	C2a	8AA	H	50.0	0.15	Class A Amplifier	For other characteristics, refer to Type 50L6-GT.									
50B5	Beam Power Tube	B1	7BZ	H	50.0	0.15	Class A Amplifier	For other characteristics, refer to Type 50C5.									
50C5	Beam Power Tube	B1	7CV	H	50.0	0.15	Class A Amplifier	110	-7.5	110	4.0	49.0	10000	7500	—	2500	1.9
50C6-G	Beam Power Tube	D10	7AC	H	50.0	0.15	Single-Tube Class A Amplifier	135	-13.5	135	3.5	58.0	9300	7000	—	2000	3.6
50L6-GT	Beam Power Tube	C2b	G-7AC1	H	50.0	0.15	Class A Amplifier	200	-14.0	135	2.2	61.0	18300	7100	—	2600	6.0
							Single-Tube Class A Amplifier	100	-7.5	110	4.0	49.0	13000	8000	—	2000	2.1
50X6	Rectifier-Doubler	C2a	7AJ	H	50.0	0.15	Rectifier-Doubler	Max. AC Volts per Plate (RMS), 117 Max. DC Output Ma., 75 Min. Total Effective Plate-Supply Impedance: Half-Wave, 30 ohms; Full-Wave, 15 ohms.									
							Half-Wave Rectifier	Max. AC Volts per Plate (RMS), 235 Max. DC Output Ma. per Plate, 75 Min. Total Effect. Supply Imped. per Plate: Up to 117 volts, 15 ohms; at 150 volts, 40 ohms; at 235 volts, 100 ohms.									
50Y6-GT	Rectifier-Doubler	C2b	G-7Q1	H	50.0	0.15	Rectifier-Doubler	For other ratings, refer to Type 25Z6.									
50Y7-GT	Rectifier-Doubler Heater Tap for Pilot	C2b	8AN	H	50.0	0.15	Voltage Doubler	Max. AC Volts per Plate (RMS), 117 Max. DC Output ma., 65 Min. Total Effective Plate-Supply Impedance per Plate, 15 ohms.									
							Half-Wave Rectifier	Max. AC Volts per Plate (RMS), 235 Max. DC Output ma. per Plate, 65 Min. Total Effect. Plate-Supply Imped. per Plate: Up to 117 volts, 15 ohms; at 150 volts, 40 ohms; at 235 volts, 100 ohms.									
50Z7-G	Rectifier-Doubler Heater Tap for Pilot	D3	G-8AN	H	50.0	0.15	Voltage Doubler	Max. AC Volts per Plate (RMS), 117 Max. DC Output Ma., 65 Min. Total Effective Plate-Supply Impedance: 15 ohms.									
							Half-Wave Rectifier	Max. AC Volts per Plate (RMS), 235 Max. DC Output Ma. per Plate, 65 Min. Total Effective Plate-Supply Impedance per Plate: Up to 117 volts, 15 ohms; at 235 volts, 100 ohms.									

53	Twin-Triode Amplifier	D12	7B	H	2.5	2.0	Amplifier	For other characteristics, refer to Type 6N7-GT.									
55	Duplex-Diode Triode	D1	8D	H	2.5	1.0	Triode Unit as Amplifier	For other characteristics, refer to Type 85.									
56	Medium-Mu Triode*	D3	9A1	H	2.5	1.0	Amplifier Detector	For other characteristics, refer to Type 76.									
57	Sharp-Cutoff Pentode	D13	8F	H	2.5	1.0	Amplifier Detector	For other characteristics, refer to Type 6J7.									
58	Remote-Cutoff Pentode	D13	8F	H	2.5	1.0	Amplifier Mixer	For other characteristics, refer to Type 6U7-G.									
59	Triple-Grid Power Amplifier	E3	7A	H	2.5	2.0	Tetrode	250	-28.0	—	—	26.0	2300	2600	6.0	5000	1.25
							Class A Amplifier	250	-18.0	250	9.0	35.0	55000	2500	—	6000	3.0
							Pentode**	300	0	—	—	20.0 ϕ	—	—	—	4600	15.0 \dagger
70L7-GT	Rectifier-Beam Power Amplifier	C10	8AA	H	70.0	0.15	Class B Amplifier	400	0	—	—	26.0 ϕ	—	—	6000	20.0 \dagger	
							Amplifier Unit as Class A Amplifier	110	-7.5	110	3.0	40.0	15000	7500	—	2000	1.8
71-A	Power Amplifier Triode	D12	4D	F	5.0	0.25	Class A Amplifier	90	-16.5	—	—	10.0	2170	1400	3.0	3600	0.125
								180	-40.5	—	—	20.0	1750	1700	3.0	4800	0.790
75	Twin-Diode High-Mu Triode	D0	6D	H	6.3	0.3	Amplifier	For other characteristics, refer to Type 6SQ7.									
76	Detector Amplifier Triode*	D5	9A1	H	6.3	0.3	Class A Amplifier	250	-13.5	—	—	5.0	9500	1450	13.8	—	—
							Bias Detector	250	-20.0 (approx.)	—	—	—	—	—	—	—	—
77	Triple-Grid Detector Amplifier	D9	1F	H	6.3	0.3	Class A Amplifier	100	-1.5	60	0.4	1.7	600000	1100	—	—	—
							Bias Detector	250	-3.0	100	0.5	2.3	1.0+ \dagger	1250	—	—	—
78	Remote-Cutoff Pentode	D9	8F	H	6.3	0.3	Amplifier Mixer	Cathode current 0.65 ma. Plate Resistor, 250000 ohms. Grid Resistor, ** 250000 ohms.									
79	Twin-Triode Amplifier	D9	8H	H	6.3	0.6	Class B Amplifier	180	0	—	—	—	—	—	—	—	—
80	Full-Wave Rectifier	D12	4C	F	5.0	2.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 350 Max. Peak Inverse Volts, 1400 Max. DC Output Ma., 125 Min. Total Effect. Supply Imped. per Plate, 50 ohms									
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 500 Max. Peak Inverse Volts, 1400 Max. DC Output Ma., 125 Min. Value of Input Choke, 10 henries									
81	Half-Wave Rectifier	F1a	4B	F	7.5	1.25	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 700 Max. Peak Inverse Volts, 2000 Max. DC Output Ma., 85 Max. Peak Plate Ma., 500									
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 450 Max. Peak Inverse Volts, 1550 Max. DC Output Ma., 115 Min. Total Effect. Supply Imped. per Plate, 50 ohms									
82	Full-Wave Rectifier	D12	4C	F	2.5	3.0	With Capacitive-Input Filter	Max. AC Volts per Plate (RMS), 550 Max. Peak Inverse Volts, 1550 Max. DC Output Ma., 115 Min. Value of Input Choke, 6 henries									
							With Inductive-Input Filter	Max. AC Volts per Plate (RMS), 550 Max. Peak Inverse Volts, 1550 Max. DC Output Ma., 115 Min. Value of Input Choke, 6 henries									

Discontinued types are shown in light face.

Type	Name	Tube Dimensions and Socket Connections		Cathode Type and Rating		Use Values to right give operating conditions and characteristics for indicated typical use	Plate Supply Volts	Grid Bias Ma Volts	Screen Supply Volts	Screen Current Ma	Plate Current Ma	AC Plate Resistance Ohms	Trans-conductance (Grid-plate) umhos	Amplification Factor	Load for Stated Power Output Ohms	Power Output Watts
		Diame.	S. C.	G. T.	Volts											
83	Full-Wave Rectifier	E3	4C	F	5.0	3.0	With Capacitive-Input Filter Max. AC Volts per Plate (RMS), 450 Max. Peak Inverse Volts, 1550	—	—	—	—	Max. DC Output Ma., 225 Max. Peak Plate Ma., 1000	—	—	Min. Total Effect. Supply Imped. per Plate, 50 ohms	—
83-v	Full-Wave Rectifier	D12	4AD	H	5.0	2.0	With Inductive-Input Filter Max. AC Volts per Plate (RMS), 550 Max. Peak Inverse Volts, 1550	—	—	—	—	Max. DC Output Ma., 225 Max. Peak Plate Ma., 1000	—	—	Min. Value of Input Choke, 3 henries	—
For other ratings, refer to Type 5V4-G.																
84/6Z4	Full-Wave Rectifier	D5	5D	H	6.3	0.5	With Capacitive-Input Filter Max. AC Volts per Plate (RMS), 325 Max. Peak Inverse Volts, 1250	—	—	—	—	Max. DC Output Ma., 60 Max. Peak Plate Ma., 180	—	—	Min. Total Effect. Supply Imped. per Plate, 150 ohms	—
							With Inductive-Input Filter Max. AC Volts per Plate (RMS), 450 Max. Peak Inverse Volts, 1250	—	—	—	—	Max. DC Output Ma., 60 Max. Peak Plate Ma., 180	—	—	Min. Value of Input Choke, 10 henries	—
85	Twin-Diode Triode	D9	6G	H	6.3	0.3	Triode Unit as Class A Amplifier 135 —10.5 — — — — 250 —20.0 — — — —	—	—	—	3.7 8.0	11000 7500	750 1100	8.3 8.3	25000 20000	0.075 0.350
							As Triode, Class A Amplifier 160 —20.0 — — — — 250 —31.0 — — — —	—	—	—	17.0 32.0	3300 2600	1425 1800	4.7 4.7	7000 5500	0.30 0.90
							As Pentode, Class A Amplifier 160 —10.0 100 1.6 — — — 250 —25.0 250 5.0 — — —	—	—	—	9.5 32.0	10400 70000	1200 1800	—	10700 6750	0.33 3.40
							As Triode, Class B Amplifier 180 0 — — — — 6.0	—	—	—	—	—	—	—	13600 9400	2.50 3.50
V-99 X-99	Detector Amplifier Triodes	C4 D1	4E 4D	D.C. F	3.3	0.063	Class A Amplifier	90 — 4.5 — — — —	—	—	2.5	15500	425	6.6	—	—
112-A	Detector Amplifier Triode	D12	4D	D.C. F	5.0	0.25	Class A Amplifier	90 — 4.5 — — — — 180 —13.5 — — — —	—	—	5.0 7.7	5400 4700	1575 1800	8.5 8.5	—	—
117L7/ M7-GT	Rectifier-Beam Power Tube	C10	8A0	H	117	0.09	Amplifier Unit as Class A Amplifier Half-Wave Rectifier	105 — 5.2 105 4.0 43.0 17000 5300	—	—	—	—	—	—	4000	0.85
							Max. AC Plate Volts (RMS), 117 Max. Peak Inverse Volts, 350	—	—	—	—	Max. DC Output Ma., 75 Max. Peak Plate Ma., 450	—	—	Min. Total Effect. Plate-Supply Imped., 15 ohms	—
117N7-GT	Rectifier-Beam Power Tube	C10	8AV	H	117	0.09	Amplifier Unit as Class A Amplifier Half-Wave Rectifier	100 — 6.0 100 5.0 51.0 16000 7000	—	—	—	—	—	—	3000	1.2
							Max. AC Plate Volts (RMS), 117 Max. Peak Inverse Volts, 350	—	—	—	—	Max. DC Output Ma., 75 Max. Peak Plate Ma., 450	—	—	Min. Total Effect. Plate-Supply Impedance, 15 ohms	—
117P7-GT	Rectifier-Beam Power Tube	C10	8AV	H	117	0.09	Amplifier Unit as Class A Amplifier Half-Wave Rectifier	For other characteristics, refer to Type 117L7/M7-GT.								
For other ratings, refer to Type 117L7/M7-GT.																

117Z3	Half-Wave Rectifier	D1a	4CB	H	117	0.04	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 117 Max. Peak Inverse Volts, 330	—	—	—	—	—	—	Max. DC Output Ma., 90 Max. Peak Plate Ma., 540	Min. Total Effect. Plate-Supply Imped., 20 ohms
117Z4-GT	Half-Wave Rectifier	C0	0-5AA	H	117.0	0.04	With Capacitive-Input Filter	Max. AC Plate Volts (RMS), 117 Max. Peak Inverse Volts, 350	—	—	—	—	—	—	Max. DC Output ma., 90 Max. Peak Plate ma., 540	Min. Total Effect. Plate-Supply Imped., 30 ohms
117Z6-GT	Rectifier-Doubler	C2b	0-7Q1	H	117	0.075	Voltage Doubler Half-Wave Rectifier	Max. AC Volts per Plate (RMS), 117 Max. DC Output Ma., 60	—	—	—	—	—	—	Min. Total Effective Plate-Supply Impedance per Plate: Half-Wave, 30 ohms; Full-Wave, 15 ohms.	
							Max. AC Volts per Plate (RMS), 235 Max. DC Output Ma. per Plate, 60	—	—	—	—	—	—	—	Min. Total Effect. Supply Imped. per Plate: Up to 117 volts, 15 ohms; at 150 volts, 40 ohms; at 235 volts, 100 ohms.	
183/ 483	Power Amplifier Triode	D12	4D	F	5.0	1.25	Class A Amplifier	250 — 60.0 — — — —	—	—	30.0	1750	1700	3.0	5000	1.8
485	Detector Amplifier Triode	D9	5A1	H	3.0	1.25	Class A Amplifier	180 — 9.0 — — — —	—	—	5.8	8900	1400	12.5	—	—
876	Current Regulator	G1	—	F	—	—	Voltage Range	40 to 60 Volts				Operating Current.....1.7 Amperes				
886	Current Regulator	O1	—	F	—	—	Voltage Range	40 to 60 Volts				Operating Current.....2.05 Amperes				

Discontinued types are shown in light face.

KEY TO TUBE DIMENSIONS

Symbol	Maximum Overall Length x Diameter	Symbol	Maximum Overall Length x Diameter	Symbol	Maximum Overall Length x Diameter	Symbol	Maximum Overall Length x Diameter	Symbol	Maximum Overall Length x Diameter
A	1 1/4" x 3/8"	B4	2 1/16" x 3/8"	C5	3 3/8" x 1 1/8"	D4	4 3/8" x 1 1/8"	D13	4 3/8" x 1 1/8"
A1	1 1/4" x 3/8"	B4a	3 1/16" x 3/8"	C6	3 1/8" x 1 1/8"	D5	4 3/8" x 1 1/8"	E0	5 1/8" x 1 1/8"
A1a	1 1/4" x 1 3/8"	B5	2 3/16" x 1 3/8"	C9a	3 1/8" x 1 3/8"	D7	4 3/8" x 1 3/8"	E0a	5 1/8" x 2 1/8"
A1b	1 1/4" x 1 3/8"	B5a	2 7/16" x 1 3/8"	C10	3 7/8" x 1 3/8"	D8	4 15/16" x 1 3/8"	E1	5 1/8" x 1 11/16"
B0	2 1/4" x 1 3/8"	C0	3 3/8" x 1 3/8"	C10a	3 9/16" x 1 3/8"	D8a	4 11/16" x 1 3/8"	E1a	5 1/8" x 1 3/8"
B0a	2 1/8" x 1 3/8"	C0a	3 1/8" x 1 3/8"	C10b	3 1/4" x 1 3/8"	D8b	4 1/8" x 1 3/8"	E2	5 1/8" x 1 1/8"
B0b	2 3/8" x 1 3/8"	C1	3 3/8" x 1 3/8"	C11	3 7/8" x 1 3/8"	D9	4 7/8" x 1 3/8"	E2a	5 3/8" x 1 3/8"
B0c	2 3/8" x 1 3/8"	C2	3 1/4" x 1 3/8"	C11a	3 7/8" x 1 3/8"	D9a	4 13/16" x 1 3/8"	E3	5 3/8" x 2 1/8"
B1	2 1/4" x 1 3/8"	C2a	3 5/8" x 1 3/8"	D1	4 1/8" x 1 3/8"	D10	4 3/8" x 1 3/8"	E3a	5 1/8" x 2 1/8"
B1a	2 1/8" x 1 1/8"	C2b	3 5/8" x 1 3/8"	D2	4 1/8" x 1 1/8"	D12	4 1/8" x 1 1/8"	F1	5 1/8" x 2 1/8"
B2	2 1/8" x 1 1/8"	C3	3 1/8" x 1 1/8"	D2a	4 1/8" x 1 1/8"	D12a	4 1/8" x 1 1/8"	F1a	6 1/8" x 2 1/8"
B3	2 3/8" x 1 1/8"	C4	3 1/4" x 1 1/8"	D3	4 1/8" x 1 1/8"	D12aa	4 1/8" x 1 3/32"	G1	8 1/8" x 2 1/8"

- ★ For Grid-leak Detection—plate volts, 45; grid return to + filament or to cathode
- Either ac or dc may be used on filament or heater, except as specifically noted. For use of dc on ac filament types, decrease stated grid volts by 1/2 (approx.) of filament voltage.
- ▷ Supply voltage applied through 20000-ohm voltage-dropping resistor.
- ▷ Mercury-Vapor Type.
- Grid # 1 is control grid. Grid # 2 is screen. Grid # 3 tied to cathode.
- † Grid # 1 is control grid. Grids # 2 and # 3 tied to plate.
- ◊ Grids # 1 and # 2 connected together. Grid # 3 tied to plate.
- ◊ Grids # 3 and # 5 are screen. Grid # 4 is signal input control grid.
- ▲ Grids # 2 and # 4 are screen. Grid # 1 is signal input control grid.
- For grid of following tube.
- ◊ Both grids connected together; likewise, both plates.
- † Power output is for two tubes at stated plate-to-plate load.
- ‡ For two tubes.
- † This diagram is like the one having the same designation without the prefix G, except that Pin No. 1 has no connection.
- ‡ Obtained preferably by using 70000-ohm voltage-dropping resistor in series with a 90 volt supply
- ‡ This diagram is like the one having the same designation with the prefix G, except that base sleeve is connected to Pin No. 1.
- ‡ With tube mounted horizontally and pins No. 4 and No. 8 in a vertical plane (pin No. 4 on top), deflecting electrode No. 1 controls left-hand section of pattern, deflecting electrode No. 2 controls top right-hand section of pattern, deflecting electrode No. 3 controls bottom section of pattern.
- ‡ With separate excitation and triode unit grounded.
- + Each unit.

- * Value is for both units operating at the specified conditions.
- †† This diagram is like the one having the same designation without the prefix G, except that Pin No. 1 is connected to internal shield.
- ‡ Grids # 2 and # 3 tied to plate
- AA Both grids connected together, likewise both cathodes
- ‡ This diagram is like the one having the same designation without the prefix GT, except that the base sleeve is connected to Pin No. 1.
- ♥ Applied through plate resistor of 100000 ohms. • Maximum.
- ✕ Applied through plate resistor of 250000 ohms. § Megohms.
- Grid # 2 tied to plate. ◆ 50000 ohms.
- ** Applied through plate resistor of 150000 ohms. ♦ Grids # 1 and # 2 tied together
- ‡ For signal input control-grid (# 1), control-grid # 3 bias, -3 volts.
- ▲ Grids # 2 and # 4 are screen. Grid # 3 is signal-input control grid.
- Note 1: Types with octal bases have *Miniature Cap.* all others have *Small Cap*
- Note 2: Subscript 1 on class of amplifier service (as AB₁) indicates that grid current does not flow during any part of input cycle.
- Subscript 2 on class of amplifier service (as AB₂) indicates that grid current flows during some part of the input cycle
- ◊ For television damper service.
- △ Cathode bias resistor, 180 ohms.
- ⊗ Superseded by 10-Y. See *Power and Gas Tubes Booklet PG-101A.*







LEGEND FOR BASE AND ENVELOPE CONNECTION DIAGRAMS



Bottom Views



KEY TO TERMINAL DESIGNATIONS



Subscripts B, D, HP, HX, P, T, and TR indicate, respectively, beam unit, diode unit, heptode unit, hexode unit, pentode unit, triode unit, and tetrode unit in multi-unit types.



BC = Base Sleeve	G = Grid	IC = Internal Connection- Do Not Use	RC = Ray-Control Electrode
BS = Base Shell	H = Heater	IS = Internal Shield	S = Shell
DJ = Deflecting Electrode	H _L = Heater Tap for Panel Lamp	K = Cathode	TA = Target
ES = External Shield	H _M = Heater Mid-Tap	NC = No Connection	U = Unit
F = Filament	HS = Heater Shield	P = Plate (Anode)	● = Gas-Type Tube
FM = Filament Mid-Tap			





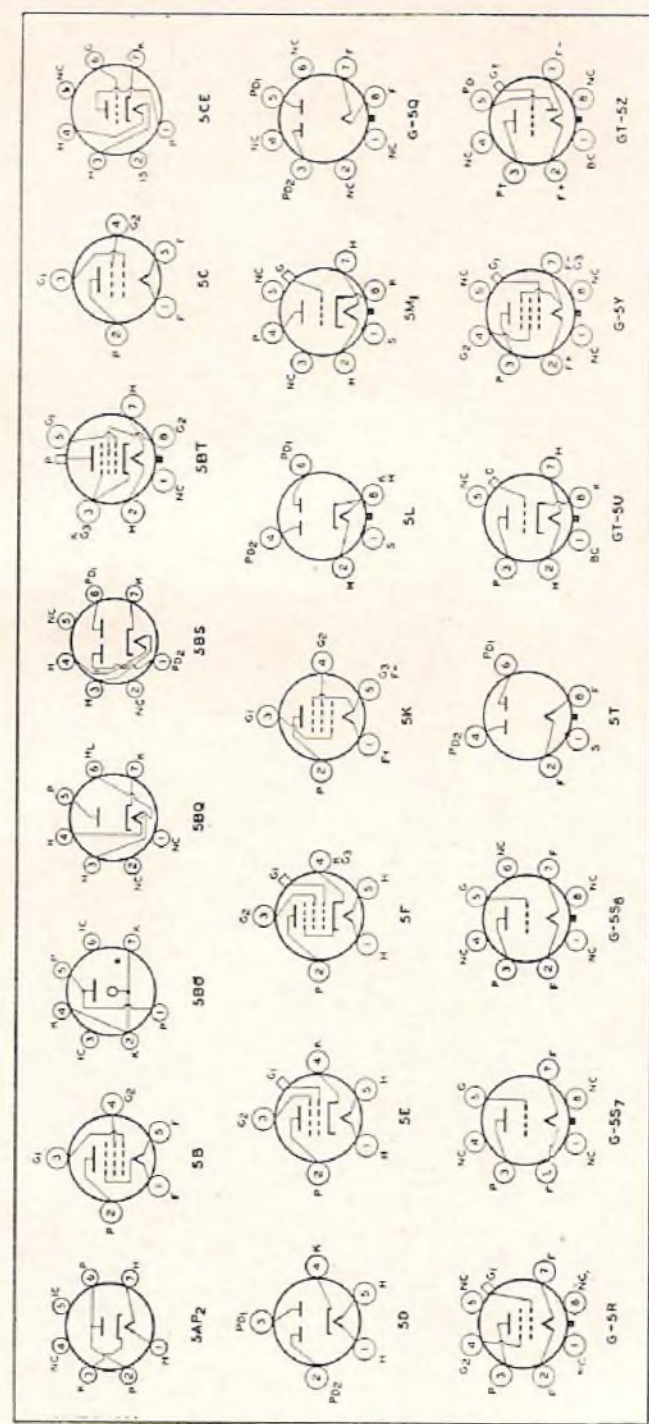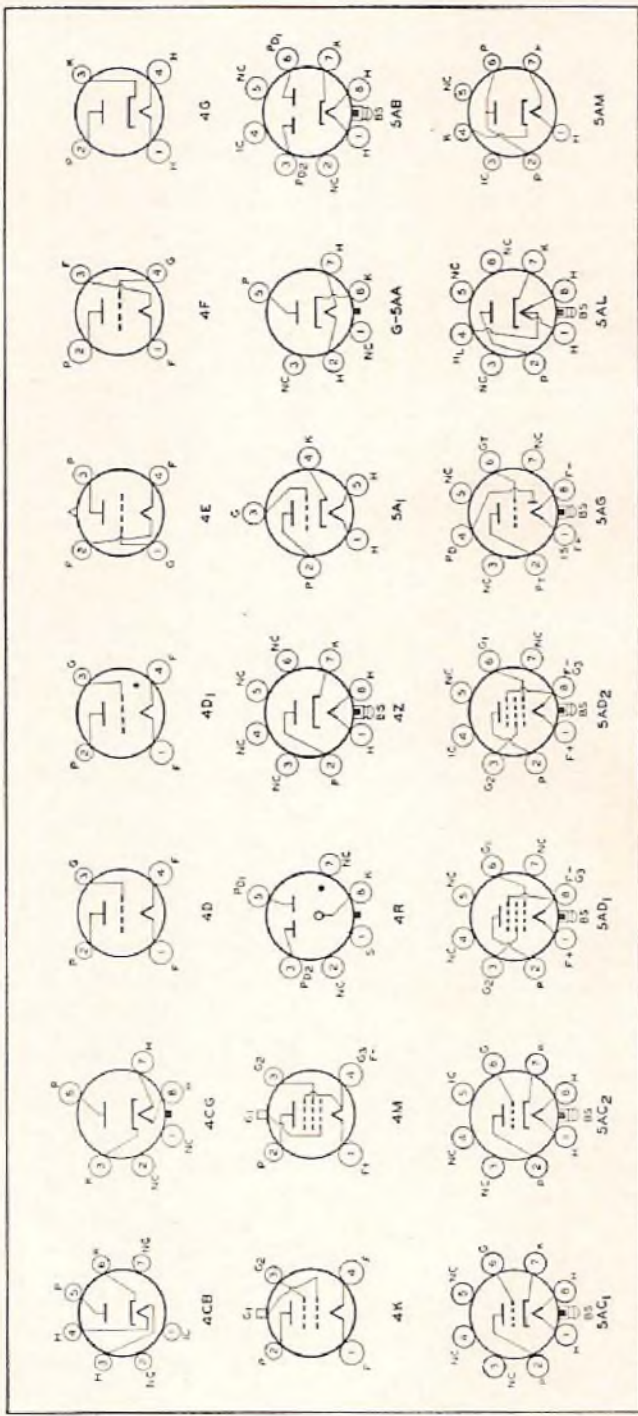

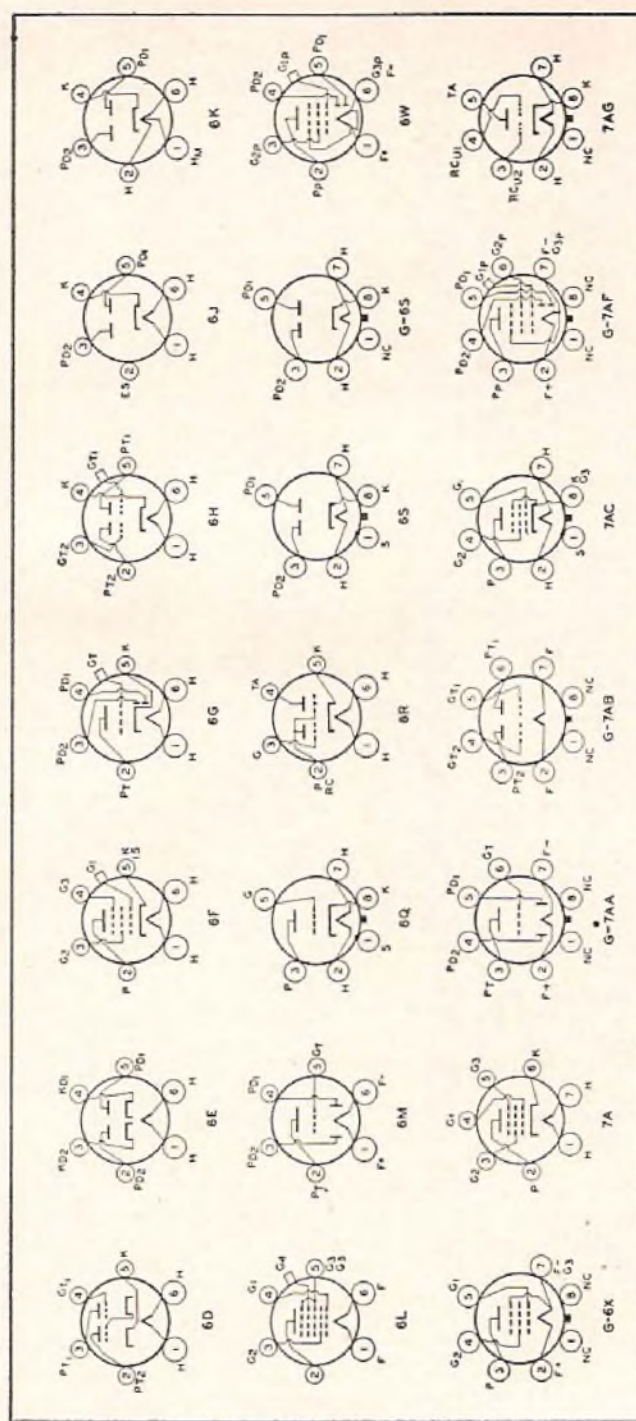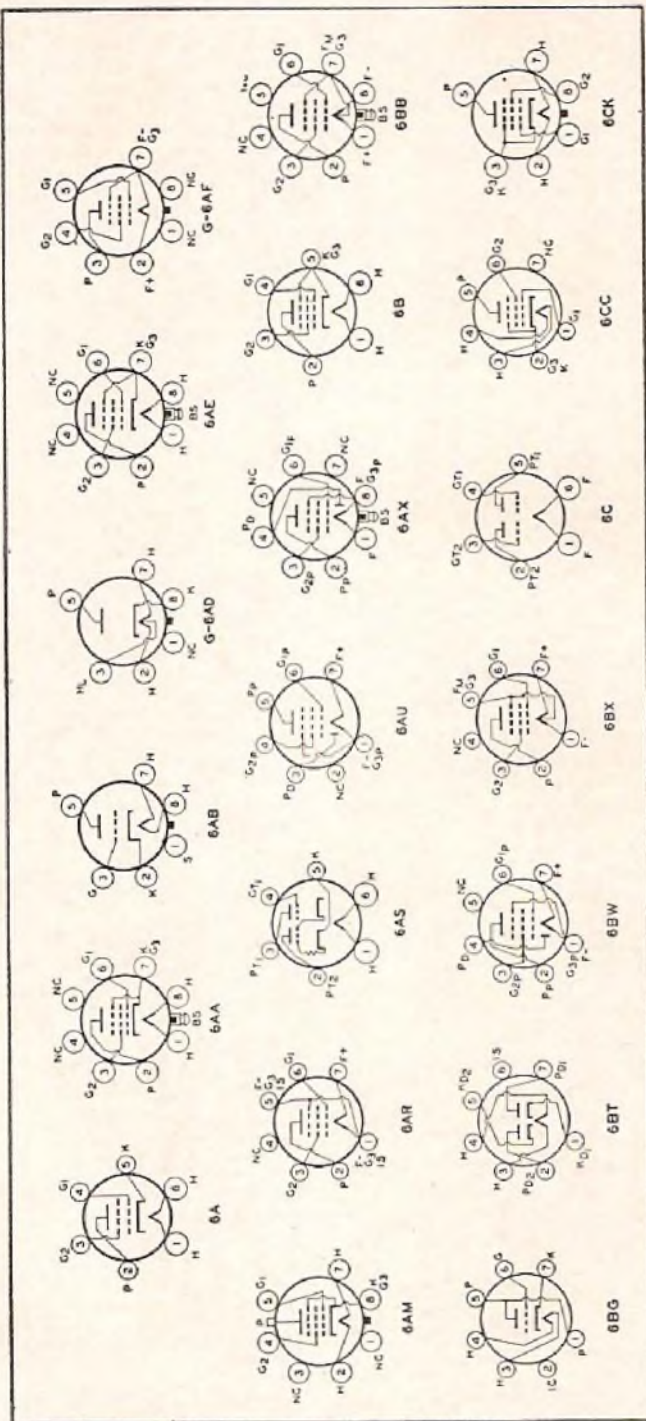

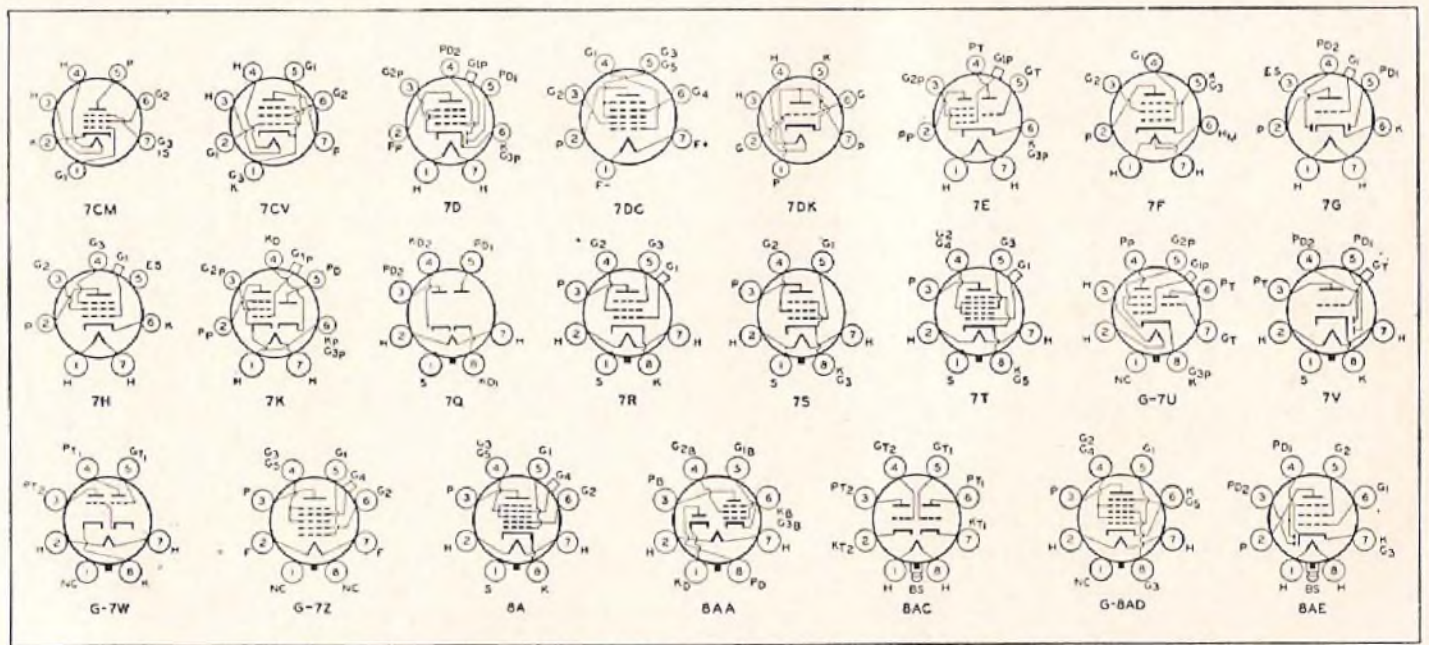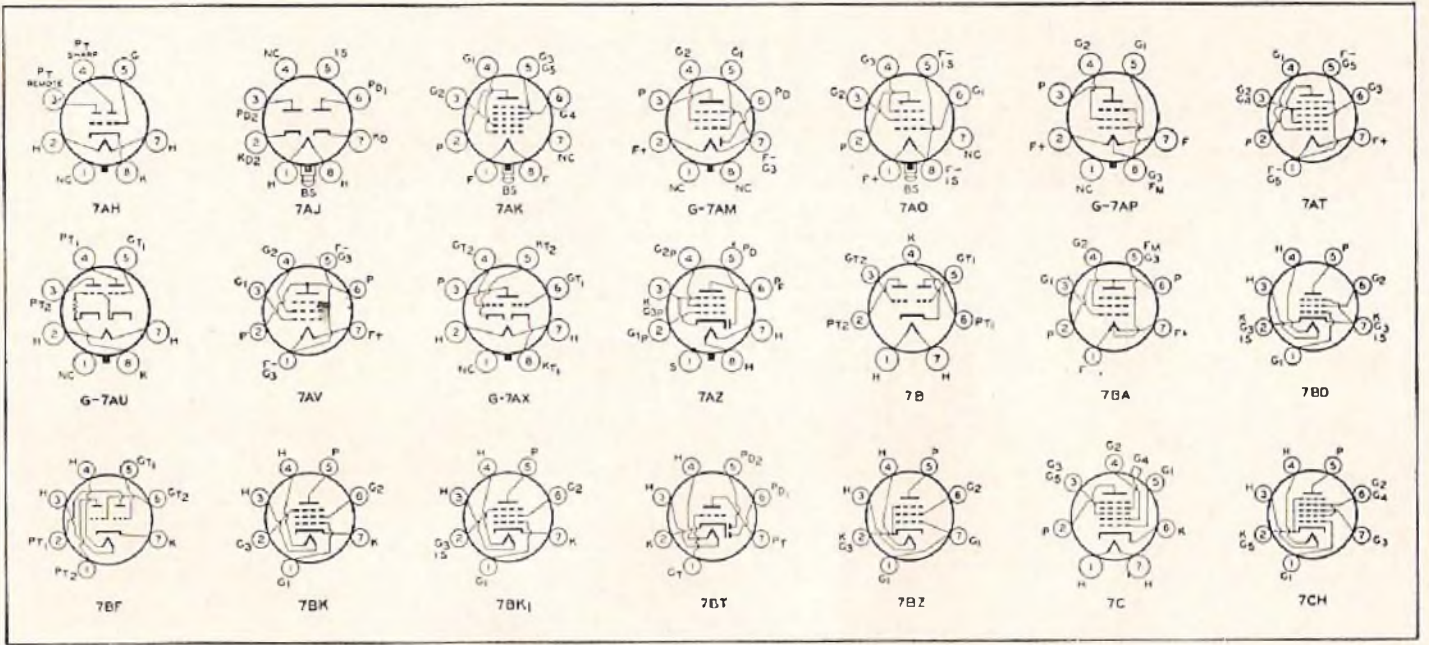

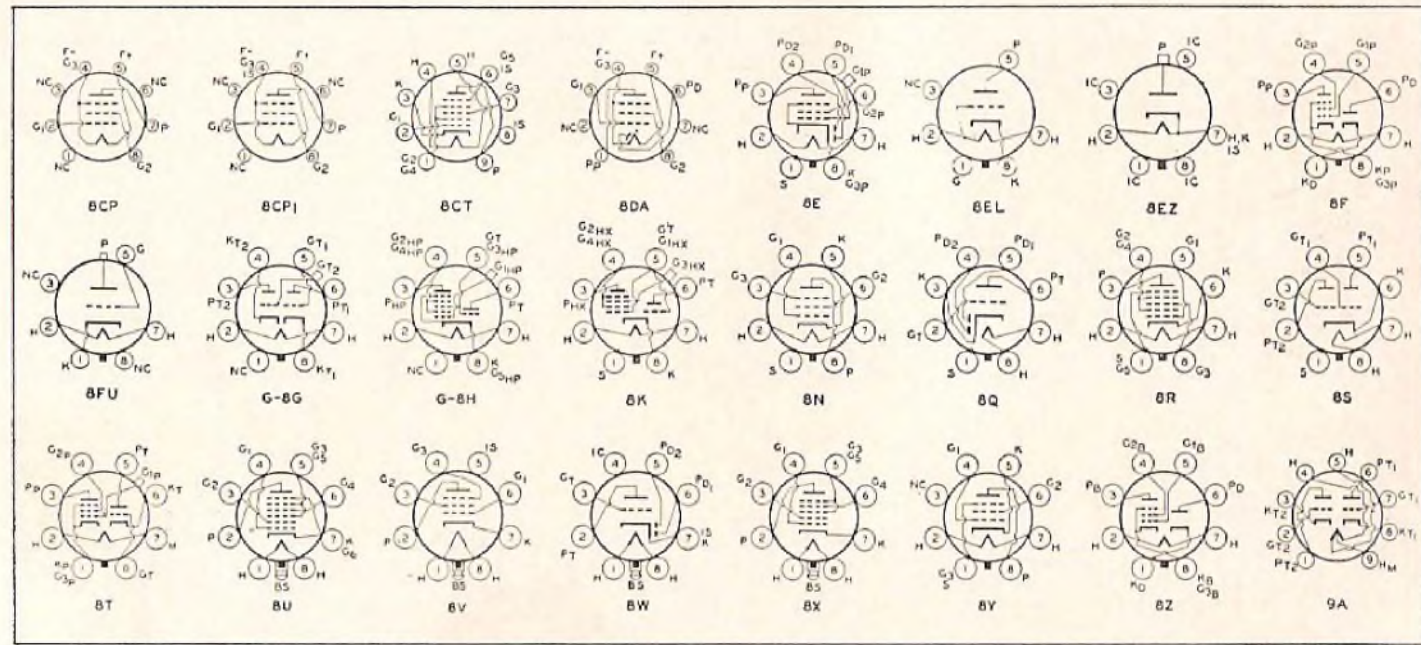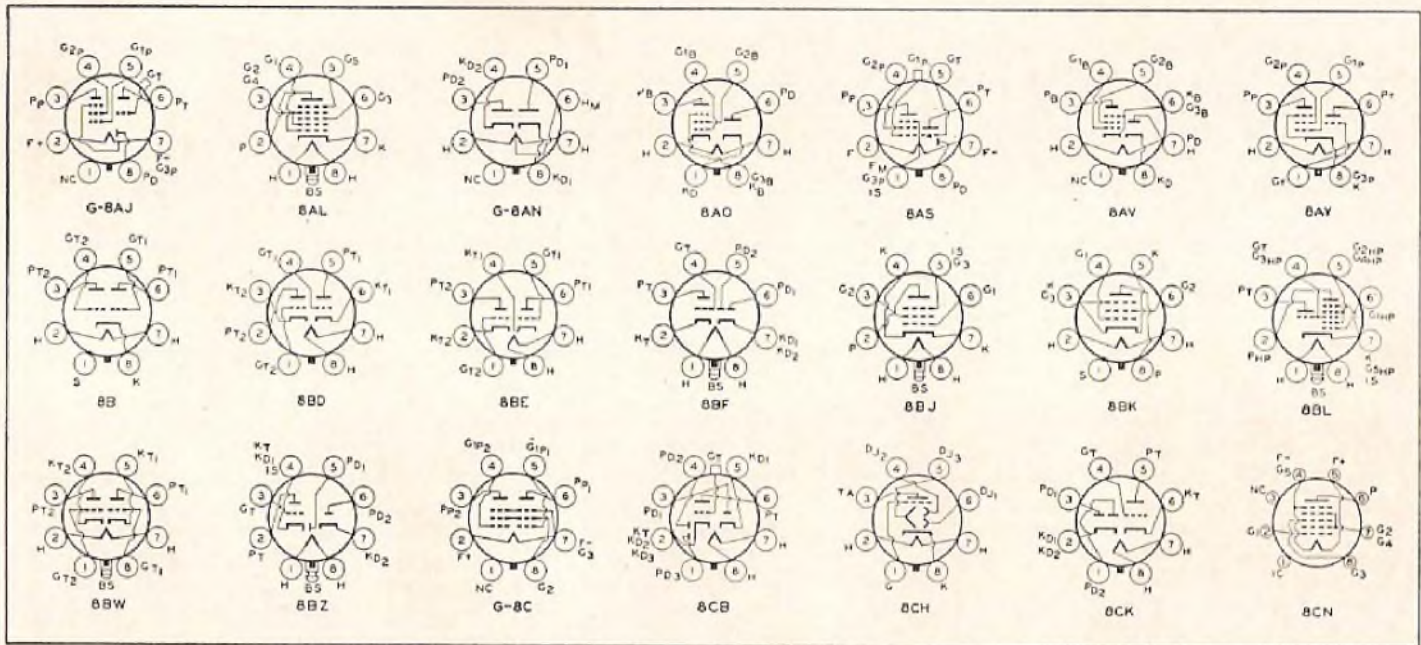

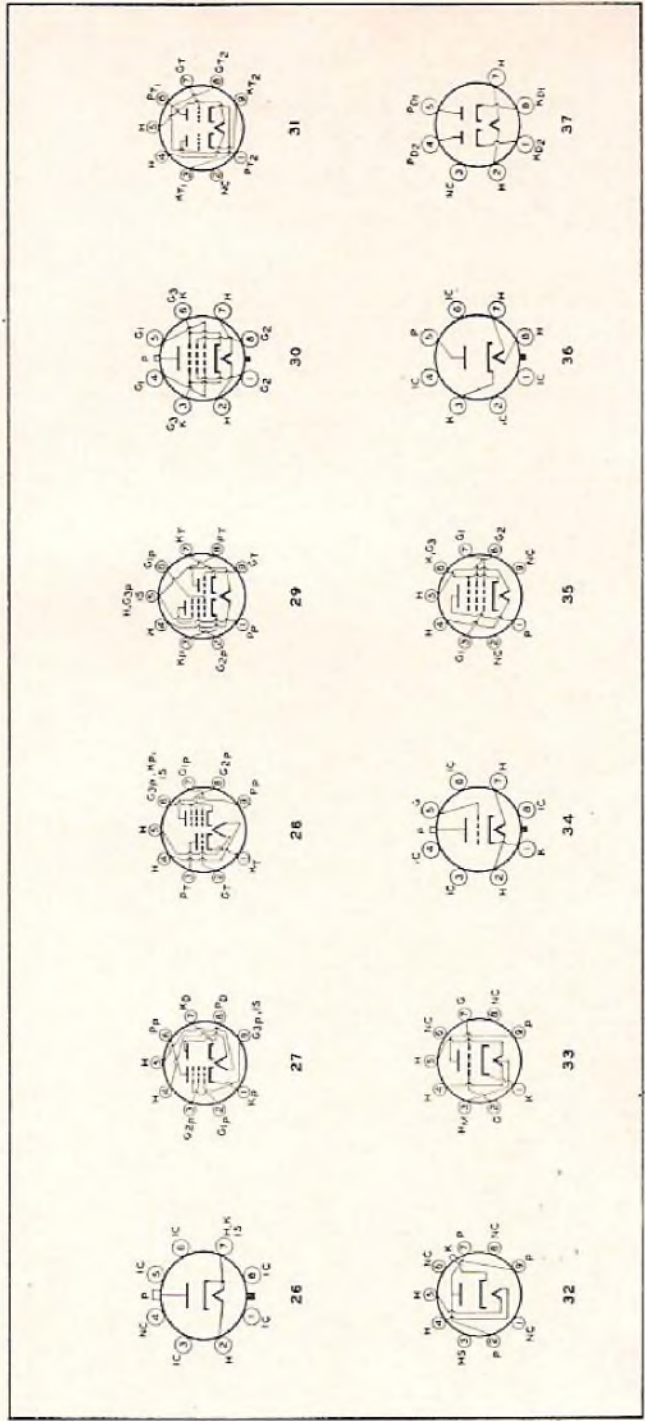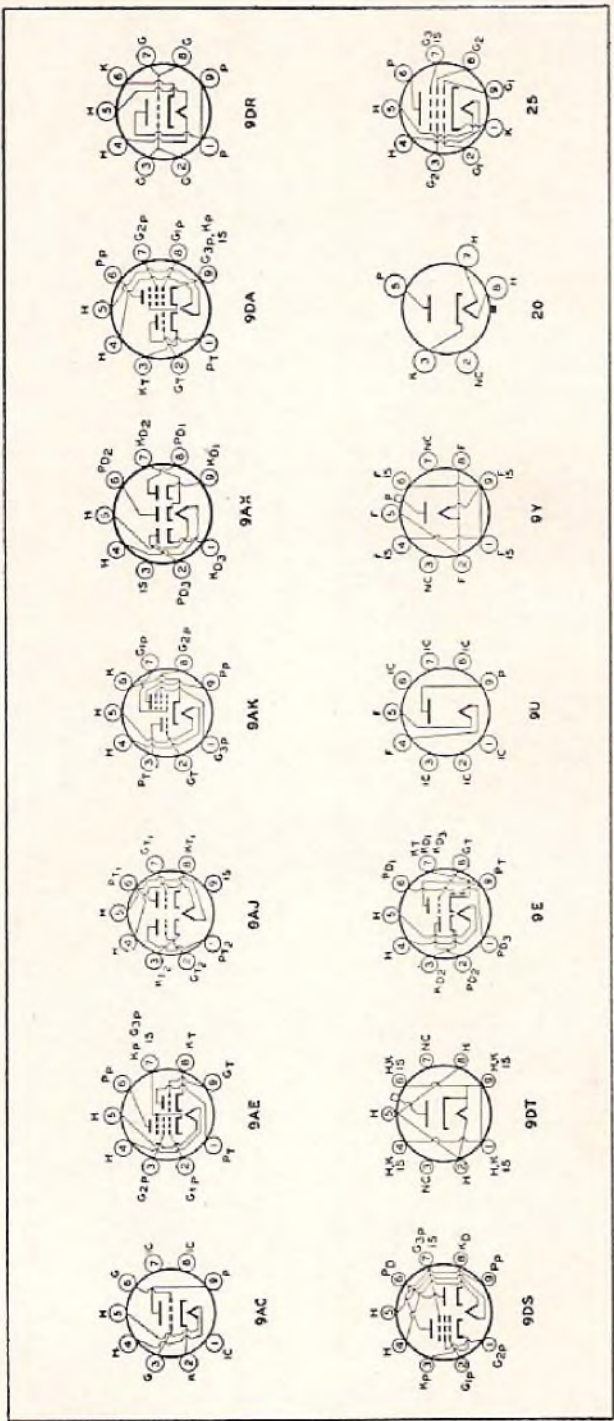

RCA KINESCOPE CHARACTERISTICS CHART

Data for these types continued on next page.

Type	Envelope	Faceplate ^b	External Coatings		Focusing Method	Deflection Method	Ion-Trap Magnet	Apert. Diameter	Maximum Dimensions Inches			Neck Length inches
			Max. μ ft	Min. μ ft					Overall Length	Envelope Diameter	Width	
Black-and-White Types												
3KP4	Glass Round	Clear	None	None	E	E-O	None	None	11 $\frac{3}{4}$	3 $\frac{1}{2}$	—	—
5TP4*	Glass Round	Clear†	500	100	E	M	None	50	12 $\frac{1}{2}$	5 $\frac{1}{2}$	—	7 $\frac{1}{2}$
7DP4	Glass Round	Clear	1500	400	E	M	Single	50	14 $\frac{1}{2}$	7 $\frac{1}{2}$	—	8 $\frac{3}{4}$
7JP4	Glass Round	Clear	None	None	E	E-O	None	None	14 $\frac{7}{8}$	7 $\frac{1}{2}$	—	—
9AP4	Glass Round	Clear	None	None	E	M	None	40	21 $\frac{1}{2}$	9 $\frac{1}{2}$	—	10
10BP4	Same as 10BP4-A, except has clear glass faceplate.											
10BP4-A	Glass Round	Filterglass	2500	500	M	M	Single	52	18	10 $\frac{1}{2}$	—	8 $\frac{1}{2}$
10FP4-A	Glass Round	Filterglass†	2500	500	M	M	None	50	18	10 $\frac{1}{2}$	—	8 $\frac{1}{2}$
12AP4	Glass Round	Clear	None	None	E	M	None	40	25 $\frac{3}{8}$	12 $\frac{1}{2}$	—	9 $\frac{1}{2}$
12KP4-A	Glass Round	Filterglass†	2500	500	M	M	None	54	18	12 $\frac{1}{2}$	—	7 $\frac{1}{2}$
12LP4	Same as 12LP4-A, except has clear glass faceplate.											
12LP4-A	Glass Round	Filterglass	2500	750	M	M	Single	57	19 $\frac{1}{2}$	12 $\frac{1}{2}$	—	8 $\frac{1}{2}$
14EP4/ 14CP4	Glass Rectangular	Filterglass	2000	750	M	M	Single	65	16 $\frac{7}{8}$	13 $\frac{1}{2}$	12 $\frac{1}{2}$	9 $\frac{3}{8}$
14HP4	Glass Rectangular	Filterglass	2000	750	E	M	Single	65	17 $\frac{1}{2}$	13 $\frac{1}{2}$	12 $\frac{1}{2}$	9 $\frac{3}{8}$
16AP4	Same as 16AP4-A, except has clear glass faceplate.											
16AP4-A	Metal Round	Filterglass	None	None	M	M	Single	53	22 $\frac{1}{2}$	16	—	7 $\frac{1}{2}$
16DP4-A	Glass Round	Filterglass	None	None	M	M	Single	60	21	16	—	7 $\frac{1}{2}$
16GP4	Same as 16GP4-B, except has Filterglass faceplate.											
16GP4-A	Same as 16GP4-B, except has clear glass faceplate.											
16GP4-B	Metal Round	Fronted Filterglass	None	None	M	M	Single	70	17 $\frac{1}{2}$	16	—	6 $\frac{1}{2}$
16SP4-C	Same as 16GP4-B, except has fronted clear glass faceplate.											

Minimum Screen Size, Inches	High Voltage Terminal	Base lug	Maximum Ratings					Typical Operating Conditions				Type
			Final High Voltage Electrode (DC 10kV) Vols	Final Electrode Vols	Grid No. 2 Vols	Grid No. 1 Bias Vols	Final High Voltage Electrode (DC 10kV) Vols	Final Electrode Vols	Grid No. 2 Vols	Grid No. 1 Vols		
Black-and-White Types												
2 3/4" Diam.	Base Pin	A	2500	1000	∞	200	2000	320 to 600	∞	-38 to -90	3KP4	
4 1/4" Diam.	Small Cavity Cap	B	27000	6000	350	150	27000	4320 to 5400	200	-42 to -98	5TP4*	
6" Diam.	Small Cavity Cap	B	8000	2400	410	125	6000	1200 to 1650	250	-27 to -63	7DP4	
6" Diam.	Base Pin	C	6000	2800	∞	200	6000	1620 to 2400	∞	-72 to -168	7JP4	
7 3/4" Diam.	Medium Cap	D	7000	2000	300	125	7000	1190 to 1790	250	-20 to -60	9AP4	
Ratings and typical operating conditions are same as for type 10BP4-A.												
9 1/4" Diam.	Small Cavity Cap	E	12000	—	410	125	8000 to 12000	—	250	-27 to -63	10BP4-A	
9 1/4" Diam.	Small Cavity Cap	E	12000	—	410	125	8000 to 12000	—	250	-27 to -63	10FP4-A	
10 1/4" Diam.	Medium Cap	D	7000	2000	300	125	7000	1190 to 1790	250	-20 to -60	12AP4	
11 1/4" Diam.	Small Cavity Cap	E	12000	—	410	125	9000 to 12000	—	250	-27 to -63	12KP4-A	
Ratings and typical operating conditions are same as for type 12LP4-A.												
11" Diam.	Small Cavity Cap	E	12000	—	410	125	9000 to 12000	—	250	-27 to -63	12LP4-A	
11 1/8" x 8 1/16"	Small Cavity Cap	E	14000	—	410	125	10000 to 14000	—	300	-33 to -77	14EP4/ 14CP4	
11 3/8" x 8 1/2"	Small Cavity Cap	H	14000	+500 -500	500	125	12000 14000	-50 to +265 -55 to +310	300 300	-33 to -77 -33 to -77	14HP4	
Ratings and typical operating conditions are same as for type 16AP4-A.												
14 3/8" Diam.	Metal-Shell Lip	F	14000	—	410	125	9000 to 14000	—	300	-33 to -77	16AP4-A	
14 1/2" Diam.	Small Cavity Cap	F	15000	—	410	125	12000 to 15000	—	250	-33 to -77	16DP4-A	
Ratings and typical operating conditions are same as for type 16GP4-B.												
Ratings and typical operating conditions are same as for type 16CP4-B.												
14 3/8" Diam.	Metal-Shell Lip	F	14500	—	410	125	12000 to 14000	—	300	-33 to -77	16CP4-B	
Ratings and typical operating conditions are same as for type 16GP4-C.												

Data for these types continued from preceding pages.

Data for these types continued on next page.

RCA Type	Envelope	Facing ⁶	Etching Conductive Coating		Feeding Deflection Method	In- Trap Magnet	Apert. Diameter Pitch Degrees	Maximum Dimensions Inches			Neck Length Inches	
			Mic. Inch	Mil. Inch				Overall Length	Extreme Diameter	Width		Height
Black-and-White Types												
16LP4-A	Glass Round	Filterglass	2000	750	M	Single	52	22½	16	—	—	7½
16RP4/ 16KP4	Glass Rectangular	Filterglass	2000	750	M	Single	65	19½	16½	14½	11½	7½
Same as 16RP4/16KP4, except has aluminized screen.												
16RP4-A/ 16KP4-A												
16TP4	Glass Rectangular	Filterglass	2000	750	M	Single	65	18½	10½	14½	11½	6½
16WP4-A	Glass Round	Filterglass	1500	750	M	Single	70	18½	16	—	—	7½
17AVP4	Glass Rectangular	Filterglass	1500	750	E	Single	85*	16	16½	15½	12½	6½
17BP4-A	Glass Rectangular	Filterglass	1500	750	M	Single	65	19½	16½	15½	12½	7½
17BP4-B			Same as 17BP4-A, except has aluminized screen.									
17CP4	Metal Rectangular	Frosted Filterglass	None	None	M	Single	66	19	17	16½	12½	7½
17CP4-A			Same as 17CP4, except has Filterglass facplate.									
17GP4	Metal Rectangular	Frosted Filterglass	None	None	E	Single	66	19½	17	16½	12½	7½
17HP4/ 17RP4	Glass Rectangular	Filterglass	1500	750	E	Single	65	19½	16½	15½	12½	7½
17HP4-B	Glass Rectangular	Filterglass†	1500	750	E	Single	65	19½	16½	15½	12½	7½
17JP4	Glass Rectangular	Filterglass	750	500	M	Single	65	19½	16½	15½	12½	5½
17LP4/ 17VP4	Glass Rectangular	Filterglass**	1500	750	E	Single	65	19½	16½	15½	12½	7½
17IP4-A	Glass Rectangular	Filterglass†**	1500	750	E	Single	65	19½	16½	15½	12½	7½
17QP4	Glass Rectangular	Filterglass**	1500	750	M	Single	65	19½	16½	15½	12½	7½
17TP4	Metal Rectangular	Frosted Filterglass	None	None	E	Single	66	19½	17	16½	12½	7½



Minimum Screen Size (microns)	High-Voltage Terminal	Max. Hz	Maximum Ratings				Typical Operating Conditions				Type		
			Ring High Voltage (ULCOP*) Volt	Electrode Voltage Volt	Cath. Filament Volt	Cath. Filament Amps	Ring High Voltage (ULCOP*) Volt	Electrode Voltage Volt	Beam Current (mA)	Beam Voltage (kV)			
Black-and-White Types													
14 1/2" Diam.	Small Cavity Cap	E	14000	—	410	125	12000 to 14000	—	300	—	300	—33 to -77	16LP4-A
13 1/2" x 10 1/2"	Small Cavity Cap	E	16000	—	410	125	12000 to 16000	—	300	—	300	—33 to -77	16RP4/16KP4
Ratings and typical operating conditions are same as for type 16RP4/16KP4.													
13 1/2" x 10 1/2"	Small Cavity Cup	E	14000	—	410	125	12000 to 14000	—	300	—	300	—33 to -77	16TP4
14 1/2" Diam.	Small Cavity Cup	E	16000	—	410	125	12000 to 16000	—	250	—	250	-27 to -63	16WF4-A
14 1/4" x 10 1/4"	Small Cavity Cap	H	16000	+1000 -500*	500	125	14000 16000	-55 to +310 -65 to +350	300 300	—	300	-33 to -77	17AVP4
14 1/4" x 10 1/4"	Small Cavity Cap	E	16000	—	410	125	12000 to 16000	—	300	—	300	-33 to -77	17BP4-A
Ratings and typical operating conditions are same as for type 17BP4-A.													
14 3/8" x 10 1/8"	Metal-Shell Lip	F	16000	—	410	125	12000 to 16000	—	300	—	300	-33 to -77	17BP4-B
Ratings and typical operating conditions are same as for Type 17CP4.													
14 3/8" x 10 1/8"	Metal-Shell Lip	G	16000	5000	500	125	12000 14000	2010 to 2760 2380 to 3220	300 300	—	300	-33 to -77	17CP4
14 1/4" x 10 1/4"	Small Cavity Cap	H	16000	+1000 -500*	500	125	14000 16000	-55 to +300 -65 to +350	300 300	—	300	-33 to -77	17HP4/17RP4
14 1/4" x 10 1/4"	Small Cavity Cup	H	16000	+1000 -500*	500	125	14000 16000	-55 to +300 -65 to +350	300 300	—	300	-33 to -77	17HP4-B
14 1/4" x 10 1/4"	Small Cavity Cup	E	16000	—	410	125	14000 to 16000	—	300	—	300	-33 to -77	17JP4
14 1/4" x 10 1/4"	Small Cavity Cap	H	16000	+1000 -500*	500	125	14000 16000	-55 to +300 -65 to +350	300 300	—	300	-33 to -77	17LP4/17VP4
14 3/8" x 10 1/8"	Small Cavity Cap	H	16000	+1000 -500*	500	125	14000 16000	-55 to +300 -65 to +350	300 300	—	300	-33 to -77	17LP4-A
14 3/8" x 10 1/8"	Small Cavity Cup	J	16000	—	410	125	12000 to 16000	—	300	—	300	-33 to -77	17QP4
14 3/8" x 10 1/8"	Metal-Shell Lip	G	16000	+1000 -500*	500	125	14000 16000	-55 to +300 -65 to +350	300 300	—	300	-33 to -77	17TP4

Data for these types continued from preceding pages.

Data for these types continued on next page.

DCA Type	Series	Faceplate	External Conductive Coating		Deflection Method	Ins. Type Magnet	Agric. Deflection Angle Degrees	Maximum Dimensions inches			Neck Length inches		
			Max. and Min.	Min. and Max.				Overall Length	External Diameter	Width		Height	
Black-and-White Types													
19AP4	Same as 19AP4-B, except has clear glass faceplate.												
19AP4-A	Same as 19AP4-B, except has Filterglass faceplate.												
19AP4-B	Metal Round	Frosted Filterglass	None	None	M	M	Single	66	22	18 $\frac{1}{2}$	—	7 $\frac{1}{2}$	
19AP4-D	Same as 19AP4-B, except has frosted clear glass faceplate.												
20CP4	Glass Rectangular	Filterglass	None	None	M	M	Single	66	21 $\frac{1}{2}$	20 $\frac{1}{2}$	18 $\frac{1}{2}$	15 $\frac{1}{2}$	7 $\frac{1}{2}$
20DP4-A/ 20CP4-A	Glass Rectangular	Filterglass	750	500	M	M	Single	66	21 $\frac{1}{2}$	20 $\frac{1}{2}$	18 $\frac{1}{2}$	15 $\frac{1}{2}$	7 $\frac{1}{2}$
20DP4-C/ 20CP4-D	Glass Rectangular	Filterglass†	750	500	M	M	Single	66	21 $\frac{1}{2}$	20 $\frac{1}{2}$	18 $\frac{1}{2}$	15 $\frac{1}{2}$	7 $\frac{1}{2}$
20MP4	Glass Rectangular	Filterglass	750	500	E	M	Single	66	22 $\frac{1}{2}$	20 $\frac{1}{2}$	18 $\frac{1}{2}$	15 $\frac{1}{2}$	7 $\frac{1}{2}$
21ACP4-A	Glass Rectangular	Filterglass†**	750	500	M	M	Single	85*	20 $\frac{3}{4}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
21ALP4-A	Glass Rectangular	Filterglass†	750	500	E	M	Single	85*	20 $\frac{3}{4}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
21ALP4-B	Glass Rectangular	Filterglass†	750	500	E	M	Single	85*	20 $\frac{3}{4}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
21AMP4-A	Glass Rectangular	Filterglass†	750	500	M	M	Single	85*	20 $\frac{3}{4}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
21AP4	Metal Rectangular	Frosted Filterglass	None	None	M	M	Single	66	22 $\frac{1}{2}$	21	19 $\frac{1}{2}$	15 $\frac{1}{2}$	7 $\frac{1}{2}$
21AVP4/ 21AUP4	Glass Rectangular	Filterglass†	1500	1200	E	M	Single	85*	20 $\frac{3}{4}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
21AVP4-A/ 21AUP4-A	Glass Rectangular	Filterglass†	1500	1200	E	M	Single	67**	23 $\frac{1}{2}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
21AWP4	Glass Rectangular	Filterglass†	1500	1200	E	M	Single	67**	23 $\frac{1}{2}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
21EP4	Glass Rectangular	Filterglass†	1500	1200	M	M	Single	67**	23 $\frac{1}{2}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	16 $\frac{1}{2}$	7 $\frac{1}{2}$
Same as 21EP4-A, except has no external conductive coating.													
21EP4-A	Glass Rectangular	Filterglass**	750	500	M	M	Single	66	23 $\frac{1}{2}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	15 $\frac{1}{2}$	7 $\frac{1}{2}$
21EP4-B	Glass Rectangular	Filterglass**	750	500	M	M	Single	66	23 $\frac{1}{2}$	21 $\frac{1}{2}$	20 $\frac{3}{4}$	15 $\frac{1}{2}$	7 $\frac{1}{2}$



Black-and-White Types

Maximum Screen Size Inches	Hgt. Voids Terminal	Sp. In.	Maximum Rating				Typical Operating Conditions				Type
			Peak High Voltage (VOLT)	Feeding Electrode (VAC)	Grid No. 1 (VAC)	Grid No. 2 (VAC)	Peak High Voltage (VOLT)	Feeding Electrode (VAC)	Grid No. 1 (VAC)	Grid No. 2 (VAC)	
<p>19AP4</p> <p>Ratings and typical operating conditions are same as for type 19AP4-B.</p>											
<p>19A1P4-A</p> <p>Ratings and typical operating conditions are same as for type 19A1P4-B.</p>											
<p>19AP4-D</p> <p>Ratings and typical operating conditions are same as for type 19AP4-B.</p>											
17 1/2 x 12 3/4	Metal-Shell Lip	F	16000	—	410	125	14000 to 19000	—	300	—33 to -77	19AP4-A
17 x 12 3/4	Small Cavity Cap	F	18000	—	410	125	14000 to 18000	—	300	—33 to -77	20DP4-A/ 20CP4-A
17 x 12 3/4	Small Cavity Cap	F	18000	—	410	125	14000 to 18000	—	300	—33 to -77	20DP4-C/ 20CP4-D
17 x 12 3/4	Small Cavity Cap	H	16000	+1000 -500*	500	125	14000	-55 to +300 -65 to +350	300	—33 to -77	20MP4
19 1/2 x 15	Small Cavity Cap	E	20000	—	500	125	13000 to 19000	—	300	—28 to -72	21ACP4-A
19 1/2 x 15	Small Cavity Cap	H	18000	+1000 -500*	500	125	16000	-65 to +350 -75 to +400	300	—33 to -77	21A1P4-A
19 1/2 x 15	Small Cavity Cap	H	20000	+1000 -500*	500	125	16000	-65 to +350 -75 to +400	300	—33 to -77	21A1P4-B
19 1/2 x 15	Small Cavity Cap	F	18000	—	500	125	14000 to 18000	—	300	—33 to -77	21AMP4-A
18 3/4 x 13 1/2	Metal-Shell Lip	F	18000	—	410	125	14000 to 18000	—	300	—33 to -77	21AP4
<p>21ATP4</p> <p>Ratings and typical operating conditions are same as for type 21ALP4-A.</p>											
19 1/2 x 15	Small Cavity Cap	H	18000	1000 -500*	500	125	14000	-55 to +300 -72 to +396	300	—28 to -72	21AVP4/ 21AUP4
19 1/2 x 15	Small Cavity Cap	H	18000	1000 -500*	500	125	14000	-55 to +300 -75 to +430	300	—33 to -77	21AYP4-A/ 21AUP4-A
19 1/2 x 15	Small Cavity Cap	F	18000	—	500	125	14000 to 18000	—	300	—33 to -77	21AWP4
<p>21EP4</p> <p>Ratings and typical operating conditions are same as for type 21EP4-A.</p>											
19 1/2 x 13 1/2	Small Cavity Cap	J	18000	—	500	125	14000 to 18000	—	300	—33 to -77	21EP4-A
<p>21EP4-B</p> <p>Ratings and typical operating conditions are same as for type 21EP4-A.</p>											

Data for these types continued from preceding pages.

RCA Type	Envelope	Faceplate [†]	External Conductive Coating		Focusing Method	Deflection Method	Ion-Trap Magnet	Approx. Deflection Angle [‡] Degrees	Maximum Dimensions Inches				Neck Length Inches
			Max. <small>μin.</small>	Min. <small>μin.</small>					Overall Length	Envelope Diameter	Width	Height	
Black-and-White Types													
21FP4-A	Glass Rectangular	Filterglass ^{††}	750	500	E	M	Single	65	23 ³ / ₈	21 ¹³ / ₁₆	20 ⁷ / ₁₆	15 ³ / ₁₆	7 ¹ / ₂
21FP4-C	Same as 21FP4-A, except has aluminized screen.												
21MP4	Metal Rectangular	Frosted Filterglass	None	None	E	M	Single	66	22 ³ / ₈	21	19 ²⁷ / ₃₂	15 ⁷ / ₁₆	7 ¹ / ₂
21YP4	Glass Rectangular	Filterglass	750	500	E	M	Single	65	23 ¹³ / ₃₂	21 ¹¹ / ₃₂	20 ³ / ₈	15 ¹¹ / ₁₆	7 ¹ / ₂
21YP4-A	Same as 21YP4, except has aluminized screen.												
21ZP4-A	Glass Rectangular	Filterglass	750	500	M	M	Single	65	23 ¹³ / ₃₂	21 ¹¹ / ₃₂	20 ³ / ₈	15 ¹¹ / ₁₆	7 ¹ / ₂
21ZP4-B	Same as 21ZP4-A, except has aluminized screen.												
24CP4-A	Glass Rectangular	Filterglass	750	500	M	M	Single	85°	21 ¹ / ₂	24 ¹ / ₈	22 ¹³ / ₁₆	19	7 ¹ / ₂
24DP4-A	Glass Rectangular	Filterglass [‡]	500	750	E	M	Single	85°	21 ¹ / ₂	24 ¹ / ₈	22 ¹³ / ₁₆	18 ³ / ₁₆	7 ¹ / ₂
24YP4	Glass Rectangular	Filterglass [‡]	1500	1200	E	M	Single	85°	21 ¹ / ₂	24 ¹ / ₈	22 ¹³ / ₁₆	18 ³ / ₁₆	7 ¹ / ₂
27MP4	Metal Rectangular	Frosted Filterglass [‡]	None	None	M	M	Single	85°	22 ³ / ₁₆	27 ⁷ / ₈	25 ⁷ / ₁₆	20 ³ / ₈	7 ¹ / ₂
Color Types													
15GP22**	Glass Round	Clear	3000	1500	E	M	None	45	26 ¹ / ₈	14 ²⁵ / ₃₂ **	—	—	10 ³ / ₈
21AXP22	Metal Round	Filterglass [‡]	None	None	E	M	None	70	25 ³ / ₁₆	20 ¹¹ / ₁₆ †	—	—	9 ¹ / ₂

† Electrostatic. M = Magnetic.
 Note: All kinescopes shown have 6.3-volt/0.6-ampere heaters except types 9AP1 and 12AP4 which have 2.5-volt/2.1-ampere heaters.
 Light face = Discontinued type.
 † Spherical, unless otherwise specified.
 † At faceplate.

† Utilizes aluminized screen.
 †† Cylindrical faceplate.
 † Grid-No. 2 connected to final high-voltage electrode within tube. † Projection type.
 † Corresponding diagonal deflection angle is 90°. † At tilt lip-terminal.
 †† This type has a flat, aluminized, Filterglass screen plate.

† For rectangular tubes, horizontal deflection angle is shown; corresponding diagonal deflection angle is 70° unless otherwise specified.
 † This value has been specified to take care of the condition where an ac voltage is provided for dynamic focusing.
 †† Diagonal deflection angle is 72°.

Data for these types continued on next page.

Data for these types continued from preceding pages.

Minimum Screen Size Inches	High-Voltage Terminal	Base	Maximum Ratings				Typical Operating Conditions				RCA Type
			Final High-Voltage Electrode (ULTOR*) Volts	Focusing Electrode Volts	Grid-No. 2 Volts	Grid-No. 1 Bias Volts [‡]	Final High-Voltage Electrode (ULTOR*) Volts	Focusing Electrode Volts	Grid-No. 2 Volts	Grid-No. 1 Bias Volts [‡]	
Black-and-White Types											
19 ¹ / ₈ x 13 ³ / ₈	Small Cavity Cap	H	18000	+1000 -500*	500	125	14000 16000	-55 to +300 -65 to +350	300	-33 to -77 -33 to -77	21FP4-A
Ratings and typical operating conditions are same as for type 21FP4-A.											
18 ³ / ₈ x 13 ¹ / ₁₆	Metal-Shell Lip	G	16000	+1000 -500*	500	125	14000 16000	-55 to +300 -65 to +350	300	-33 to -77 -33 to -77	21MP4
19 ¹ / ₈ x 14 ³ / ₁₆	Small Cavity Cap	H	18000	+1000 -500*	500	125	16000 18000	-65 to +350 -70 to +395	300	-28 to -72 -28 to -72	21YP4
Ratings and typical operating conditions are the same as for type 21YP4.											
19 ¹ / ₈ x 14 ¹ / ₁₆	Small Cavity Cap	J	18000	—	500	125	16000 to 18000	—	300	-28 to -72	21ZP4-A
Ratings and typical operating conditions are the same as for type 21ZP4-A.											
21 ¹ / ₄ x 16 ³ / ₄	Small Cavity Cap	J	20000	—	500	125	16000 to 18000	—	300	-28 to -72	21ZP4-B
21 ¹ / ₄ x 16 ³ / ₄	Small Cavity Cap	H	20000	+1500 -500*	500	125	16000 18000	-65 to +350 -75 to +400	300 400	-33 to -77 -42 to -101	24CP4-A
Ratings and typical operating conditions are same as for type 24DP4-A.											
23 ³ / ₁₆ x 18 ³ / ₈	Metal-Shell Lip	F	18000	—	500	125	16000 to 18000	—	300	-33 to -77	24YP4 27MP4
Color Types											
11 ¹ / ₈ x 8 ⁵ / ₈	Metal Flange	K	20000	5000	500*	200*	For additional data, refer to technical bulletin available on request.				15GP22
19 ³ / ₁₆ x 15 ¹ / ₄	Metal Flange	L	25000	6000	800*	400*	For additional data, refer to technical bulletin available on request.				21AXP22


† Positive bias value = 0 volts; positive peak value = 2 volts.
 † For visual extinction of undeflected focused spot. The values for visual extinction of focused raster are about 5 volts less negative than the indicated values.
 † For base diagram, refer to diagram P.

† Deflection Factors (volts def/in.) for typical operating conditions shown:


Type	D ₁ , K.D. (nearby zone)	D ₁ & D ₂ (nearby base)
3KP4	160 to 136	76 to 104
7IP4	186 to 246	150 to 204

* Each gun.


* ULTOR is defined as the electrode, or the electrode in combination with one or more additional electrodes connected within the tube to it, to which is applied the highest dc voltage for accelerating the electrons in the beam prior to its deflection.




A
 ULTOR = $G_2 + G_4 + CL$
 FOCUSING ELECTRODE = G_3




B
 ULTOR = $G_4 + CL$
 FOCUSING ELECTRODE = G_3




C
 ULTOR = $G_2 + G_4 + CL$
 FOCUSING ELECTRODE = G_3




D
 ULTOR = $G_4 + CL$
 FOCUSING ELECTRODE = G_3




E
 ULTOR = $G_3 + CL$




F
 ULTOR = $G_3 + CL$



G
 ULTOR = $G_3 + G_5 + CL$
 FOCUSING ELECTRODE = G_4



H
 ULTOR = $G_3 + G_5 + CL$
 FOCUSING ELECTRODE = G_4



J
 ULTOR = $G_3 + CL$



K
 ULTOR = $G_5 + G_6 + CL$
 FOCUSING ELECTRODE = G_3



L
 ULTOR = $G_4 + G_5 + CL$
 FOCUSING ELECTRODE = G_3

RCA QUICK-SELECTION GUIDE

Power, Cathode-Ray, Photo—, and Special Tubes for Radio and Industry

VACUUM POWER TUBES

TYPE	CATH- ODE VOLTS	MAXIMUM DIMEN- SIONS INCHES		AMPLIFI- CATION FACTOR	MAX. PLATE RATINGS*	
		Length	Diam.		DC Volts	Dissi- pation Watts
TRIODES (AIR-COOLED)						
3C33	12.6	3 $\frac{1}{8}$	2 $\frac{3}{8}$	11b	±2000	15
10-Y	7.5	5 $\frac{3}{8}$	2 $\frac{1}{8}$	8	450	15
800	7.5	6 $\frac{3}{8}$	2 $\frac{1}{8}$	15	1250	35
801-A	7.5	5 $\frac{3}{8}$	2 $\frac{1}{8}$	8	600	20
805	10	8 $\frac{1}{2}$	2 $\frac{5}{8}$	variable	1500	125
806	5	10	3 $\frac{1}{8}$	12.6	3300†	225†
808	7.5	6 $\frac{1}{8}$	2 $\frac{1}{8}$	47	2000†	75†
809	6.3	6 $\frac{7}{8}$	2 $\frac{7}{8}$	50	1000†	30†
810	10	8 $\frac{3}{4}$	2 $\frac{1}{4}$ *	36	2500†	175†
811-A	6.3	6 $\frac{1}{2}$	2 $\frac{7}{8}$	160	1500†	65†
812-A	6.3	6 $\frac{1}{2}$	2 $\frac{7}{8}$	29	1500†	65†
826	7.5	3 $\frac{1}{8}$	2 $\frac{3}{8}$	31	1000†	55†
830-B	10	6 $\frac{1}{8}$	2 $\frac{1}{8}$	25	1000	60
833-A	10	8 $\frac{1}{2}$	4 $\frac{1}{2}$	35	3300†	350†
834	7.5	6 $\frac{7}{8}$	2 $\frac{1}{8}$	10.5	1250	50†
838	10	7 $\frac{7}{8}$	2 $\frac{3}{8}$	variable	1250	100
841	7.5	5 $\frac{3}{8}$	2 $\frac{7}{8}$	30	450	15
842	7.5	5 $\frac{3}{8}$	2 $\frac{1}{8}$	3	425	12
845	10	7 $\frac{7}{8}$	2 $\frac{5}{8}$	5.3	1250	100
849	11	14 $\frac{3}{8}$	4 $\frac{1}{8}$	19	2500	400
851	11	17 $\frac{3}{8}$	6 $\frac{1}{8}$	20.5	2500	750
1623	6.3	6 $\frac{9}{8}$	2 $\frac{7}{8}$	20	1000†	30†
1626	12.6	4 $\frac{1}{8}$	1 $\frac{9}{8}$	5	250	5
5556	4.5	4 $\frac{1}{2}$	1 $\frac{3}{8}$	8.5	350	10
8000	10	8 $\frac{3}{4}$	2 $\frac{1}{4}$ *	16.5	2500†	175†
8003	10	8 $\frac{1}{2}$	2 $\frac{7}{8}$	12	1350	100
8005	10	6 $\frac{1}{8}$	2 $\frac{7}{8}$	20	1500†	85†
8012-A	6.3	3 $\frac{1}{8}$	1 $\frac{3}{8}$ *	18	1000	40
8025-A	6.3	4 $\frac{1}{8}$	1 $\frac{5}{8}$ *	18	1000†	30†

†For Intermittent Commercial and Amateur Service.

*Absolute values for Continuous Commercial Service, unless otherwise specified. b Per Unit. *Maximum Radius.

RCA QUICK-SELECTION GUIDE

VACUUM POWER TUBES (cont'd)

TYPE	CATH- ODE VOLTS	MAXIMUM DIMEN- SIONS INCHES		AMPLIFI- CATION FACTOR	MAX. PLATE RATINGS*	Dissi- pation Watts
		Length	Diam.			
TRIODES (WATER-COOLED)						
9C21	19.5	24 $\frac{1}{2}$	9 $\frac{1}{2}$	40	17000	40000
207	22	20 $\frac{1}{4}$	6 $\frac{1}{2}$ *	20	15000	10000
862-A	33	60 $\frac{3}{8}$	10*	45	20000	100000
880	12.6	11 $\frac{3}{8}$	7	20	10500	20000
889-A	11	10 $\frac{1}{2}$	3 $\frac{5}{8}$	21	8500	5000
891	11 $\frac{\#}{\#}$	20 $\frac{7}{8}$	6 $\frac{1}{2}$ *	8.5	12000	6000
892	11 $\frac{\#}{\#}$	20 $\frac{7}{8}$	6 $\frac{1}{2}$ *	50	15000	10000
893-A	20 $\frac{\#}{\#}$	26 $\frac{3}{4}$	6 $\frac{3}{8}$ *	34.5	20000	20000
898-A	33 $\frac{\#}{\#}$	60 $\frac{3}{8}$	10*	45	20000	100000
5770	11	24 $\frac{1}{2}$	9 $\frac{1}{2}$	41	17000	50000
5771	7.5	11 $\frac{5}{16}$	7	20	12500	22500
5831	6	38 $\frac{3}{4}$	9 $\frac{7}{8}$	30	16000	150000
6383	6.3	4 $\frac{9}{32}$	1 $\frac{3}{4}$	27	1500	600
TRIODES (FORCED-AIR-COOLED)						
2C39-A	6.3	2 $\frac{3}{4}$	1 $\frac{7}{64}$	100	1000	100
4C33	5	4 $\frac{7}{8}$	2 $\frac{1}{16}$	25	13000 \ddagger	250 \ddagger
9C22	19.5	25	17	41	17000	20000
9C25	6	17 $\frac{3}{8}$	14 $\frac{1}{4}$	32	11500	17500
833-A	10	8 $\frac{13}{16}$	4 $\frac{9}{32}$	35	4000	450
889R-A	11	11 $\frac{7}{8}$	5 $\frac{1}{2}$ *	21	8500	5000
891-R	11 $\frac{\#}{\#}$	22	6 $\frac{1}{2}$ *	8.5	10000	4000
892-R	11 $\frac{\#}{\#}$	22	6 $\frac{1}{2}$ *	50	12500	4000
893A-R	20 $\frac{\#}{\#}$	28	8 $\frac{13}{16}$ *	34.5	20000	20000
5588	6.3	3 $\frac{1}{32}$	1 $\frac{3}{4}$	16	1000	200
5592	11	17 $\frac{3}{8}$	14 $\frac{1}{4}$	32	11500	17500
5604-A	11	13 $\frac{3}{4}$	5 $\frac{1}{2}$ *	20	12500	10000
5671	11	25	16 $\frac{1}{16}$	39	15000	25000
5713	3.3	4 $\frac{7}{8}$	2 $\frac{1}{8}$	25	1500	250
5762/7C24	12.6	7 $\frac{1}{8}$	4 $\frac{11}{16}$	29	6200	3000
5786	11	9 $\frac{5}{8}$	2 $\frac{1}{8}$	32	3000	600
5946	6.3	3 $\frac{1}{32}$	1 $\frac{3}{4}$	27	7500*	250
6161	6.3	3 $\frac{1}{32}$	1 $\frac{3}{4}$	27	1600	250
TETRODES (AIR-COOLED)						
4-65A	6	4 $\frac{3}{8}$	2 $\frac{3}{8}$	5 \S	3000	65
4-125A/4D21	5	5 $\frac{11}{16}$	2 $\frac{3}{4}$	5.9 \S	3000	125
860	10	8 $\frac{3}{4}$	4 $\frac{1}{4}$ *	1100	3000	100
861	11	17 $\frac{7}{8}$	6 $\frac{5}{8}$ *	2400	3500	400
865	7.5	5 $\frac{3}{4}$	2 $\frac{1}{8}$	750	750	15

*Maximum Radius. $\#$ Per Section. \S Grid-Screen Mu-Factor.

•Absolute values for Continuous Commercial Service.

\ddagger Pulsed Oscillator Operation—Class C Plate Modulated.

*Peak Positive-Pulse Plate-Supply Volts.

RCA QUICK-SELECTION GUIDE

VACUUM POWER TUBES (cont'd)

TYPE	CATH- ODE VOLTS	MAXIMUM DIMEN- SIONS INCHES		TRANS- CON- DUC- TANCE	MAX. PLATE RATINGS*	
		Length	Diam.		DC Volts	Dissi- pation Watts
TETRODES (WATER-COOLED)						
8D21	3.2	12 $\frac{9}{32}$	5 $\frac{3}{4}$	55b	6000	6000
TETRODES (FORCED-AIR-COOLED)						
4-250A/5D22	5	6 $\frac{3}{8}$	3 $\frac{9}{16}$	4000	4000	250
4-1000A	7.5	9 $\frac{5}{8}$	5 $\frac{1}{4}$	75	6000	1000
4X150A	6	2 $\frac{5}{8}$	1 $\frac{3}{4}$	55	1250	150
4X500A	5	4 $\frac{7}{8}$	2 $\frac{9}{16}$	6.25	4000	500
827-R	7.5	6 $\frac{3}{8}$	4 $\frac{1}{2}$	165	3500	800
6166	5	11 $\frac{5}{8}$	6 $\frac{13}{32}$	105	6600	10000
6181	120	7 $\frac{7}{16}$	5 $\frac{3}{32}$	85	2000	2000
BEAM POWER TUBES AND PENTODES (AIR-COOLED)						
2E24	6.3	3 $\frac{1}{2}$	1 $\frac{5}{16}$	3200	700☆	18.5☆
2E26	6.3	3 $\frac{1}{2}$	1 $\frac{5}{16}$	3500	700☆	18.5☆
3E22	6.3/12.6	4 $\frac{1}{2}$	2 $\frac{3}{8}$	4000	600☆	35☆
3E29— Similar to type 829-B but for pulsed operation.						
4E27/8001	5	6 $\frac{3}{8}$	2 $\frac{11}{16}$	2800	4000	75
4E27A/5-125B	5	6 $\frac{3}{8}$	2 $\frac{3}{4}$	2150	4000	125
802	6.3	5 $\frac{3}{4}$	2 $\frac{1}{8}$	2250	600†	13†
803	10	9 $\frac{1}{4}$	2 $\frac{9}{16}$	4000	2000	125
804	7.5	7 $\frac{11}{16}$	2 $\frac{1}{8}$	3250	1500†	50†
807	6.3	5 $\frac{3}{4}$	2 $\frac{1}{8}$	6000	750†	30†
813	10	7 $\frac{1}{2}$	2 $\frac{9}{16}$	3750	2250†	125†
814	10	7 $\frac{11}{16}$	2 $\frac{9}{16}$	3300	1500†	65†
815	6.3/12.6	4 $\frac{9}{16}$	2 $\frac{3}{8}$	4000	500†	25†
828	10	7 $\frac{11}{16}$	2 $\frac{1}{8}$	2700	1500†	80†
829-B	6.3/12.6	4 $\frac{5}{8}$	2 $\frac{3}{8}$	8500	750†	45†
832-A	6.3/12.6	3 $\frac{5}{8}$	2 $\frac{3}{8}$	3500	750†	15†
837	12.6	5 $\frac{3}{4}$	2 $\frac{1}{8}$	3400	500	12
1613	6.3	3 $\frac{1}{4}$	1 $\frac{5}{16}$	2500	350	10
1614	6.3	4 $\frac{5}{8}$	1 $\frac{5}{8}$	6050	450†	25†
1619	2.5	4 $\frac{5}{8}$	1 $\frac{5}{8}$	4500	400	15
1624	2.5	5 $\frac{3}{4}$	2 $\frac{1}{8}$	4000	600	25
1625	12.6	5 $\frac{3}{4}$	2 $\frac{1}{8}$	6000	750†	30†
5618	3.0/6.0	2 $\frac{5}{8}$	$\frac{3}{4}$	3600	300†	5†
5763	6	2 $\frac{7}{8}$	$\frac{7}{8}$	7000	300	12
5894	6.3/12.6	4 $\frac{5}{8}$	1 $\frac{5}{8}$	8.25	600	40
6146	6.3	3 $\frac{1}{4}$	1 $\frac{3}{8}$	4.55	750†	25†
6159	Same as 6146 but has 26.5-volt heater					
6293	See Technical Bulletin					
6417	12.6	2 $\frac{5}{8}$	$\frac{7}{8}$	Refer to 5763		
6524	6.3	3 $\frac{9}{16}$	1 $\frac{13}{16}$	4500	600	25
BEAM POWER TUBES AND PENTODES (WATER-COOLED)						
6448	1.35/2.70	7 $\frac{1}{32}$	11 $\frac{3}{8}$	65	7000	26000

* Absolute values for Continuous Commercial Service.

† For Intermittent Commercial and Amateur Service.

§ Grid-Screen Mu-Factor.

☆ For Intermittent Mobile Service.

RCA QUICK-SELECTION GUIDE

GLOW-DISCHARGE (COLD-CATHODE) TUBES

TYPE	MAXIMUM DIMENSIONS INCHES		OPERATING VOLTS	OPERATING CURRENT DC MA.	
	Length	Diam.		Min.	Max.
VOLTAGE-REGULATOR TYPES					
OA2	2 ⁵ / ₈	3/4	151	5	30
OA3	4 ¹ / ₈	1 ¹ / ₈	75	5	40
OB2	2 ⁵ / ₈	3/4	108	5	30
OC3	4 ¹ / ₈	1 ³ / ₈	108	5	40
OD3	4 ¹ / ₈	1 ⁹ / ₈	153	5	40
991	1 ⁵ / ₁₆	5/8	59	0.4	2
5651*	2 ¹ / ₈	3/4	87	1.5	3.5
6073	2 ⁵ / ₈	3/4	151	5	30
6074	2 ⁵ / ₈	3/4	108	5	30

MAX. RATINGS

TYPE	DIMENSIONS INCHES		Peak Anode Volts	Peak Cathode Ma.	Av. Cathode Ma.
	Length	Diam.			
RELAY TYPES					
OA4-G	4 ¹ / ₈	1 ⁹ / ₈	225	100	25
1C21	2 ⁵ / ₈	1 ⁵ / ₈	180	100	25
5E23	2 ¹ / ₈	3/4	200	100	25

RECTIFIERS

TYPE	CATHODE VOLTS	MAXIMUM DIMENSIONS INCHES		MAX. PLATE OR ANODE RATINGS	
		Length	Diam.	Peak Inv. Volts	Amp. Av.
VACUUM TYPES					
2V3-G	2.5	4 ¹ / ₂	1 ⁹ / ₈	16500	0.002
2X2-A	2.5	4 ¹ / ₂	1 ⁷ / ₈	12500	0.0075
5R4-GY	5	5 ⁵ / ₈	2 ¹ / ₈	2800	0.175
217-C	10	8 ¹ / ₂	2 ⁵ / ₈	7500	0.150
579-B	2.5	7 ⁷ / ₈	2 ¹ / ₈	20000	0.025
836	2.5	6 ¹ / ₈	2 ⁷ / ₈	5000	0.25
878	2.5	7 ⁵ / ₈	1 ¹ / ₂	20000	0.005
1616	2.5	6 ¹ / ₈	2 ¹ / ₈	6000	0.13
5825	1.6	5 ³ / ₂	2 ¹ / ₈	60000	0.002
8013-A	2.5	6 ¹ / ₈	2 ¹ / ₈	40000	0.020
8020	5	8	2 ⁵ / ₈	40000	0.100

MERCURY-VAPOR TYPES

575-A	5	11 ¹ / ₈	3 ¹ / ₂	15000	1.5
673	5	11 ³ / ₈	3 ¹ / ₂	15000	1.5
816	2.5	4 ¹ / ₂	1 ⁹ / ₈	7500	0.125
857-B	5	19 ⁷ / ₈	7 ¹ / ₈	22000	10
866-A	2.5	6 ⁹ / ₈	2 ⁷ / ₈	10000	0.25
869-B	5	14 ⁷ / ₈	5 ¹ / ₈	20000	2.5
872-A	5	8 ¹ / ₂	2 ⁵ / ₈	10000	1.25
5558	5	7	3	5000	2.5
5561	5	11 ¹ / ₄	3 ¹ / ₂	3000	6.4
8008	5	8 ³ / ₄	2 ⁵ / ₈	10000	1.25

*Voltage-reference type.

RCA QUICK-SELECTION GUIDE

RECTIFIERS (cont'd)

TYPE	CATHODE VOLTS	MAXIMUM DIMENSIONS INCHES		MAX. PLATE OR ANODE RATINGS	
		Length	Diam.	Peak Inv. Volts	Av. Amp.
GAS TYPES					
3B25	2.5	6 $\frac{5}{8}$	2 $\frac{1}{8}$	4500	0.5
3B28	2.5	6 $\frac{3}{8}$	2 $\frac{1}{8}$	10000	0.25

THYRATRONS

TYPE	CATHODE VOLTS	Length	Diam.	Peak Inv. Volts	Av. Amp.
TRIODES					
3C23	2.5	6 $\frac{1}{8}$	2 $\frac{1}{8}$	1250	1.5
627	2.5	7	2 $\frac{7}{8}$	2500	0.64
629	2.5	4 $\frac{1}{4}$	1 $\frac{9}{16}$	350	0.04
676	5	11 $\frac{3}{4}$	3 $\frac{1}{2}$	2500	6.4
677	5	11 $\frac{3}{4}$	3 $\frac{1}{4}$	10000	4.0
884	6.3	4 $\frac{1}{8}$	1 $\frac{9}{16}$	350	0.075
885	2.5	4 $\frac{1}{8}$	1 $\frac{9}{16}$	350	0.075
5557	2.5	6 $\frac{5}{8}$	2 $\frac{1}{4}$	5000	0.5
5559	5	7 $\frac{1}{4}$	3	1000	2.5
5563-A	5	10 $\frac{1}{2}$	2 $\frac{7}{8}$	15000	1.6
5728/FG-67	5	7	3	1000	2.5
6130/3C45•	6.3	5 $\frac{3}{8}$	1 $\frac{9}{16}$	3000	0.045

TETRODES

TYPE	CATHODE VOLTS	Length	Diam.	Peak Inv. Volts	Av. Amp.
2D21	6.3	2 $\frac{1}{8}$	$\frac{3}{4}$	1300	0.1
3D22-A	6.3	4 $\frac{5}{8}$	2 $\frac{3}{8}$	1500	0.8
105	5	11 $\frac{1}{4}$	2 $\frac{1}{2}$ *	2500	6.4
172	5	10 $\frac{3}{4}$	2 $\frac{5}{8}$ *	2000	6.4
502-A	6.3	2 $\frac{5}{8}$	1 $\frac{5}{8}$	1300	0.1
672-A	5	8 $\frac{1}{4}$	2 $\frac{5}{8}$	2500	3.2
2050	6.3	4 $\frac{1}{8}$	1 $\frac{9}{16}$	1300	0.1
5560	5	7 $\frac{1}{2}$	2 $\frac{1}{4}$ *	1000	2.5
5696	6.3	1 $\frac{3}{4}$	$\frac{3}{4}$	500	0.025
6012	6.3	4 $\frac{1}{4}$	1 $\frac{3}{4}$	1300	0.5

IGNITRONS

TYPE	Size	MAX. DIMENSIONS INCHES		MAX. ANODE RATINGS††		MAX. ANODE RATING*†	
		Approx. Length	Radius	KVA Demand	Corresponding Av. Anode Amp.	Peak Inv. Volts	Av. Amp.
5550	(A)	10	1 $\frac{3}{8}$	300	12.1
5551	(B)	13 $\frac{1}{2}$	2 $\frac{7}{8}$	600	30.2
5552	(C)	14 $\frac{1}{2}$	3 $\frac{5}{8}$	1200	75.6
5553-A	(D)	20	4 $\frac{1}{2}$	2400	192.
5554		17 $\frac{1}{2}$	3 $\frac{1}{2}$	2100	75
5555		18 $\frac{1}{2}$	4 $\frac{9}{16}$	2100	150
5822		14 $\frac{1}{2}$	3 $\frac{5}{8}$	1500▲	56▲

*Maximum Radius. ††For welder-control service.

*†For power rectification. •For operation up to 50000 feet.

▲For frequency-changer resistance-welding service.

RCA QUICK-SELECTION GUIDE

PHOTOTUBES

TYPE	MAX. DIMENSIONS INCHES		MAX. ANODE-SUPPLY VOLTS	LUMINOUS SENSITIVITY MICROAMP. PER LUMEN	SPECTRAL RESPONSE
	Length	Diam.			
GAS TYPES					
1P29	4/8	1 1/8	100	40	S-3
1P37	4 1/8	1 1/8	100	135	S-4
1P40	Same as 930 except for non-hygroscopic base.				
1P41	2 1/8	1 1/8	90	90	S-1
868	4 1/8	1 1/8	100	90	S-1
918	4 1/8	4 1/8	90	150	S-1
920¶	4	1 3/16	90	100	S-1
921	1 3/4	2 3/4	90	135	S-1
923	3 1/8	1 1/4	90	135	S-1
924	2 3/4	1 1/8	90	90	S-1
927	2 3/4	1 1/8	90	125	S-1
928	3 1/8	1 3/8	90	65	S-1
930	3 1/8	1 3/8	90	135	S-1
5581	3 1/8	1 3/8	100	135	S-4
5582	1 3/8	3 3/8	100	120	S-4
5583	2 1/8	1 1/8	100	135	S-4
5584¶	4	1 1/8	100	120	S-4
6405/1640	4 7/8	1 1/8	90	135	S-1

VACUUM TYPES

1P39	Same as 929 except for non-hygroscopic base.				
1P42	1 1/2	1/4	180	37	S-9
917	4 7/8	1 1/8	500	20	S-1
919	4 7/8	1 1/8	500	20	S-1
922	1 3/8	3 3/8	500	20	S-1
925	2 5/8	1 3/8	250	20	S-1
926	1 3/8	3 3/8	500	6.5	S-3
929	3 1/8	1 3/8	250	45	S-4
934	2 1/2	1 1/8	250	30	S-4
935	4 1/4	1 3/8	250	35	S-5
5652*	2 7/8	1 3/8	250	45	S-4
5653	3 1/8	1 3/8	250	45	S-4
6570	4 7/8	1 1/8	500	30	S-1

MULTIPLIER PHOTOTUBES

TYPE	MAX. DIMENSIONS INCHES		MAX. ANODE-SUPPLY VOLTS	LUMINOUS SENSITIVITY AMP./LUMEN	SPECTRAL RESPONSE
	Length	Diam.			
1P21	3 1/8	1 5/8	1250	80•	S-4
1P22	3 1/8	1 5/8	1250	0.6•	S-8
1P28	3 1/8	1 5/8	1250	50•	S-5
931-A	3 1/8	1 5/8	1250	24•	S-4
2020	5 1/8	2 1/4	1500	6••	S-11
5819	5 1/8	2 1/4	1250	25•	S-11
6199	4 9/16	1 9/16	1250	27•	S-11
6217	5 1/8	2 1/4	1250	24•	S-10

¶Twin type. *Twin type; each unit has a composite anode-cathode. •With Supply Volts=1000. ••With Supply Volts=1250.

RCA QUICK-SELECTION GUIDE

MULTIPLIER PHOTOTUBES (cont'd)

TYPE	MAX. DIMENSIONS INCHES		MAX. ANODE-SUPPLY VOLTS	LUMINOUS SENSITIVITY AMP/LUMEN	SPECIAL RE-SPONSE
	Length	Diam.			
6323▶	3 $\frac{1}{8}$	1 $\frac{7}{8}$	1250	35•	S-4
6328▶	3 $\frac{1}{8}$	1 $\frac{7}{8}$	1250	35•	S-4
6342	5 $\frac{1}{8}$	2 $\frac{1}{4}$	1500	7.5••	S-11
6372	7 $\frac{3}{4}$	2 $\frac{7}{8}$	1200	20	S-11
6472▶	2 $\frac{3}{4}$ °	1 $\frac{7}{8}$	1250	35•	S-4
6655	5 $\frac{1}{8}$	2 $\frac{1}{4}$	1250	25•	S-11

CATHODE-RAY TUBES‡

TYPE	MAX. OVER-ALL LENGTH	MIN. SCREEN DIAM.	MAX. FINAL ELEC-TRODE VOLTS	DEFLECTION FACTOR VOLTS DC/INT	
	Inches	Inches	VOLTS	DJ ₁ -DJ ₂ ††	DJ ₃ -DJ ₄ *

OSCILLOGRAPH TYPES:

Medium Persistence, Electrostatic Focus:

2AP1-A	7 $\frac{5}{8}$	1 $\frac{3}{4}$	1000	184-276	157-235
2BP1	7 $\frac{1}{8}$	1 $\frac{3}{4}$	2500	115-155	74-100
3AP1-A	11 $\frac{7}{8}$	2 $\frac{1}{2}$	1500	61-91	59-89
3BP1-A	10 $\frac{1}{4}$	2 $\frac{3}{4}$	2000	80-120	59-89
3JP1◻	10 $\frac{1}{4}$	2 $\frac{3}{4}$	4000	85-115	63-85
3KP1	11 $\frac{3}{4}$	2 $\frac{3}{4}$	2500	50-68	38-52
3MP1	8 $\frac{1}{4}$	2 $\frac{3}{4}$	2500	115-145	110-140
3RP1	9 $\frac{3}{8}$	2 $\frac{3}{4}$	2500	73-99	52-70
3RP1-A	Same as type 3RP1, except has flat face.				
5ABP1◻	17 $\frac{1}{8}$	4 $\frac{1}{8}$	6000	27-36	18-24
5ABP4	Same as type 5ABP1, except for phosphor.				
5BP1-A	17 $\frac{1}{8}$	4 $\frac{1}{2}$	2000	35-49	32-45
5CP1-A◻	17 $\frac{1}{8}$	4 $\frac{1}{2}$	4000	39-53	33-45
5UP1	15 $\frac{1}{8}$	4 $\frac{1}{2}$	2500	28-39	23-31
7CP1	13 $\frac{1}{8}$	6 $\frac{1}{2}$	8000	**	**
7YP1	14 $\frac{7}{8}$	6	4000	31-41	25-34
902-A	7 $\frac{5}{8}$	1 $\frac{3}{4}$	600	183-277	160-235
914-A	20 $\frac{7}{8}$	8 $\frac{1}{4}$	7000	38-54	30-44

‡All have 6.3-v heaters except: the 3AP1-A and 914-A which have 2.5-v heaters; and the 7NP4 and 7WP4 which have 6.6-v heaters.
 †Per KV of final electrode volts. ††Deflecting electrodes nearer the face. *Deflecting electrodes nearer the base. ◻Post-deflection accelerator type. **Magnetic deflection. ▶For head-light dimming device. °Excluding flexible leads. •With Supply Volts = 1000. ••With Supply Volts = 1250.

RCA QUICK-SELECTION GUIDE

CATHODE-RAY TUBES (cont'd)

TYPE	MAX. OVER- ALL LENGTH	MIN. SCREEN DIAM.	MAX. FINAL ELEC- TRODE VOLTS	DEFLECTION FACTOR VOLTS DC/IN†	
	Inches	Inches		DJ ₁ -DJ ₂ ††	DJ ₃ -DJ ₄ *

Short Persistence:

2BP11	Same as type 2BP1, except for phosphor.				
3KP11	Same as type 3KP1, except for phosphor.				
5ABP11	Same as type 5ABP1, except for phosphor.				
5CP11-A	Same as type 5CP1-A, except for phosphor.				
5UP11	Same as type 5UP1, except for phosphor.				
908-A	Same as type 3AP1-A, except for phosphor.				

Medium-Long Persistence:

5CP12	Same as type 5CP1-A, except for phosphor.				
5FP14	Same as type 5FP7-A, except for phosphor.				
7MP14	Same as type 7MP7, except for phosphor.				

Long Persistence:

3FP7-A ♦	10¼	2¾	4000	106-144	77-104
3JP7	Same as type 3JP1, except for phosphor.				
3KP7	Same as type 3KP1, except for phosphor.				
5ABP7	Same as type 5ABP1, except for phosphor.				
5CP7-A	Same as type 5CP1-A, except for phosphor.				
5FP7-A	11½	4¼	8000	Mag. focus & deflec.	
5UP7	Same as type 5UP1, except for phosphor.				
7BP7-A	13⅝	6	8000	Mag. focus & deflec.	
7MP7	13⅝	6	8000	Mag. focus & deflec.	
10KP7	18	9	10000	Mag. focus & deflec.	
12DP7-A	20⅞	10	10000	Mag. focus & deflec.	
12DP7-B	Same as 12DP7-A, but has filterglass faceplate.				
16ADP7	22	14¾	14000	Mag. focus & deflec.	

TYPE	MAX. OVER- ALL LENGTH	MIN. SCREEN DIAM.	MAX. FINAL ELEC- TRODE VOLTS	MAX. FOCUS- ING ELEC- TRODE VOLTS	DEFLEC- TION ANGLE Approx. Degrees
	Inches	Inches			

FLYING-SPOT TYPES:

5AUP24#	12⅞	4¼	27000	6000	50
5WP15	11½	4¼	27000	6000	50
5ZP16	14¾	4¼	27000	7000	40

TRANSCRIBER KINESCOPE:

5WP11	11½	4¼	27000	6000	50
-------	-----	----	-------	------	----

VIEW-FINDER KINESCOPES:

5AYP4#	11½	4¼	10000	1500	53
5FP4-A	11½	4¼	8000	§	53

†All have 6.3v heaters except: the 3AP1-A and 914-A which have 2.5-v heaters; and the 7NP4 and 7WP4 which have 6.6-v heaters.

♦Electrostatic focus. #Aluminized. †, ††, * See preceding page.

RCA QUICK-SELECTION GUIDE

CATHODE-RAY TUBES‡ (cont'd)

TYPE	MAX. OVER-ALL LENGTH Inches	MIN. SCREEN DIAM. Inches	MAX. FINAL ELEC-TRODE VOLTS	MAX. FOCUS-ING ELEC-TRODE VOLTS	DEFLEC-TION ANGLE Approx. Degrees
PROJECTION KINESCOPIES (For Theater Television):					
7NP4■#	20 $\frac{7}{8}$	5x3 $\frac{3}{4}$	80000	20000	35
7WP4▲#	20 $\frac{1}{16}$	5x3 $\frac{3}{4}$	80000	20000	35
MONITOR KINESCOPIES:					
7CP4	13 $\frac{1}{2}$	6 $\frac{1}{2}$	8000	2400	57
7QP4	13 $\frac{1}{4}$	6	10000	8	52
7TP4#	13 $\frac{1}{2}$	6	12000	2000	50
10SP4#	17	9 $\frac{1}{8}$	14000	2700	50

‡All have 6.3-v. heaters except: the 3AP1-A and 914-A which have 2.5-v. heaters; and the 7NP4 and 7WP4 which have 6.6-v. heaters.

■Projection-throw distance = 60 ft. ▲Projection-throw distance = 80 ft. §Magnetic focus. #Aluminized.

CAMERA TUBES

ICONOSCOPES:

1850-A—For pick-up from motion-picture film or slides. Utilizes electrostatic focus and magnetic deflection. Has high ratio of signal to noise but relatively low sensitivity. Response covers entire visible spectrum.

5527 For industrial and laboratory TV applications. Features small size and moderate sensitivity. Utilizes electrostatic focus and deflection.

IMAGE ORTHICONS:

5820 For both outdoor and studio pickup. Has exceptional sensitivity combined with spectral response approaching that of the eye. Very stable in performance at all incident light levels on the object ranging from bright sunlight to a deep shadow. Utilizes magnetic focus and deflection.

6474/1854 For use in color cameras utilizing the method of simultaneous pickup of the studio or outdoor scene to be televised. Has exceptional sensitivity combined with spectral response approaching that of the eye. Utilizes magnetic focus and deflection.

VIDICONS:

6198 For use in industrial TV applications. Features small size and simplicity. Employs as its light-sensitive element a photoconductive layer having spectral response approaching that of the eye. Has very good sensitivity. Utilizes magnetic focus and deflection.

6326 Similar to 6198 but intended primarily for use in TV cameras for motion-picture film, transparencies, and opaques. Gives excellent results with any TV film projector.

RCA QUICK-SELECTION GUIDE

CAMERA TUBES (cont'd)

MONOSCOPES:

- 2F21 A 5" type with Indian-head test pattern for supplying signal to test video performance of TV receivers and transmitters. Utilizes electrostatic focus and magnetic deflection.
- 1699 Custom-built type like the 2F21 except that its pattern is individually styled to customer requirements.

COMPUTER STORAGE TUBE

- 6571 Single-beam type. For use in binary-digital computer systems.

VACUUM-GAUGE TUBES

- 1945 Hydrogen-Sensitive, Ionization Type. For locating minute leaks in vacuum enclosures.
- 1946 Thermocouple Type. For measuring gas pressures in the range from 1 mm to 0.0001 mm of mercury (1000 to 0.1 micron).
- 1947 Pirani Type. For measuring gas pressures in the range from 0.5 mm to 0.01 mm of mercury (500 to 10 microns).
- 1949 Ionization Type, hard-glass construction. For measuring gas pressures below 0.0001 mm of mercury (0.1 micron).
- 1950 Ionization Type. Similar to type 1949, but soft-glass construction.

"SPECIAL RED" TUBES

Designed and manufactured for critical industrial applications where 10000-hour life, rigid construction, extreme uniformity and exceptional stability are paramount.

- 5690 Full-Weave Vacuum Rectifier. Features two separate diode units of the indirectly-heated-cathode type. Max. peak inverse plate volts, 1120; max. peak plate current per plate, 375 ma.; max. dc output current per plate, 75 ma.
- 5691 High-Mu Twin Triode similar to type 6SL7-GT.
- 5962 Medium-Mu Twin Triode similar to type 6SN7-GT.
- 5693 Sharp-Cutoff Pentode similar to type 6SJ7.

"PREMIUM" TUBES

For special applications where dependable performance under shock and vibration is a prime consideration.

MINIATURE TYPES

- 5654 Sharp-Cutoff Pentode. "Premium" version of type 6AK5 for rf and if broad-band applications.
- 5726 Twin Diode. "Premium" version of type 6AL5-W for detector service in circuits utilizing wide-band amplifiers.
- 5751 High-Mu Twin Triode. "Premium" type similar to 12AX7 for applications such as phase inverters, and in numerous industrial control devices.
- 5814-A—Medium-Mu Twin Triode. "Premium" type similar to

RCA QUICK-SELECTION GUIDE

"PREMIUM" TUBES (cont'd)

MINIATURE TYPES (cont'd)

- 12AU7 for applications such as mixers, oscillators, phase inverters, and in numerous industrial control devices.
- 6073 Voltage Regulator, Glow-Discharge Type having very stable characteristics. "Premium" version of type OA2.
- 6074 Voltage Regulator, Glow-Discharge Type having very stable characteristics. "Premium" version of type OB2.
- 6101 Medium-Mu Twin Triode. Especially designed as a class A amplifier in mobile and aircraft equipment and in industrial application where uniformity of characteristics and dependability are important.

SUBMINIATURE TYPES

- 5718 Medium-Mu Triode. "Premium" type similar to miniature type 6C4 for use as a power amplifier and oscillator. Will give a useful power output of nearly one watt at a frequency of 500 megacycles per second.
- 5719 High-Mu Triode. "Premium" type for use as an audio amplifier in mobile and aircraft receivers. In audio service as a resistance-coupled amplifier, it is capable of providing high voltage gain.
- 5840 Sharp-Cutoff Pentode. "Premium" type similar to miniature type 6AK5 for use as an rf or if amplifier in high-frequency broad-band circuits in mobile and aircraft receivers. As an rf amplifier, the 5840 can be used at frequencies up to about 400 Mc.

TYPES FOR SPECIAL APPLICATIONS

ACORNS

- 6F4 Oscillator Triode. Heater-cathode type. For frequencies up to 1200 Mc.
- 6L4 U-H-F Oscillator Triode. Heater-cathode type. For frequencies up to 1200 Mc.
- 954 Detector Amplifier Pentode. Heater-cathode type. For frequencies up to 430 Mc.
- 955 Detector Amplifier Oscillator Triode. Heater-cathode type. For frequencies up to 600 Mc.
- 956 Super-Control R-F Amplifier Pentode. Remote cut-off, heater-cathode type. For frequencies up to 430 Mc.
- 957 Detector Amplifier Oscillator Triode. Filament volts, 1.25. Amplification factor, 13.5.
- 958-A—Amplifier Triode. Filament volts, 1.25. For oscillator and r-f amplifier service.
- 959 Detector Amplifier Pentode. Filament volts, 1.25 for r-f amplifier and detector service.
- 9004 U-H-F Diode. Heater-cathode type. For u-h-f service as a rectifier, detector or measuring device. Resonant frequency, about 850 Mc.

RCA QUICK-SELECTION GUIDE

TYPES FOR SPECIAL APPLICATIONS (cont'd)

ACORNS (cont'd)

9005 U-H-F Diode. Heater-cathode type. For u-h-f service as a rectifier, detector or measuring device. Resonant frequency, about 1500 Mc.

MINIATURES

- 3A4 Power Amplifier Pentode. Filament volts, 1.4/2.8. A-F power output of 700 milliwatts.
- 3A5 H-F Twin Triode. Class C power output of 2 watts at 40 Mc.
- 6AS6 Sharp-cutoff Pentode. 7-pin miniature type. Grids No. 1 and No. 3 can each be used as independent control electrodes. For use in gated amplifier circuits, delay circuits, gain-controlled amplifiers, and mixer circuits.
- 6J4 U-H-F Amplifier Triode. Cathode-drive amplifier. For frequencies up to 500 Mc.
- 12AY7—Medium-Mu Twin Triode. 9-pin Miniature Type. For use in the first stages of high-gain audio-frequency amplifiers, where reduction of microphonics, leakage noise, and hum are primary considerations.
- 26A6 RF Amplifier Pentode. Remote-cutoff, heater-cathode type. Useful in aircraft receivers operating directly from 12-cell storage batteries.
- 26C6 Duplex-Diode Triode. Heater-cathode type. Useful in aircraft receivers operating directly from 12-cell storage batteries.
- 26D6 Pentagrid Converter. Heater-cathode type. Useful in aircraft receivers operating directly from 12-cell storage batteries.
- 1654 Half-Wave High-Vacuum Rectifier. Max. peak inverse plate volts, 4300. Max. average plate current, 1 ma.
- 5879 Sharp-Cutoff Pentode. 9-pin miniature type. Intended for use as an audio amplifier in applications requiring reduced microphonics, leakage noise, and hum. Especially useful in the input stages of medium-gain public address systems, home sound recorders, and general-purpose audio systems.
- 9001 Detector Amplifier Pentode. A sharp cut-off pentode for use as an r-f amplifier or detector in u-h-f service.
- 9002 U-H-F Triode. Useful as a u-h-f detector, amplifier and oscillator.
- 9003 Super-Control R-F Amplifier Pentode. Remote cut-off type useful as a mixer or as an r-f or i-f amplifier in u-h-f services.
- 9006 U-H-F Diode. Heater-cathode type. Resonant frequency, about 700 Mc. For u-h-f service as a rectifier, detector, or measuring device.

RCA QUICK-SELECTION GUIDE

TYPES FOR SPECIAL APPLICATIONS (cont'd)

METAL, GT, AND OTHER GLASS TYPES

- 2C40 Lighthouse Triode. A high frequency amplifier and oscillator for use up to 3000 Mc. Plate dissipation, 6.5 watts max., $\mu = 36$, gm = 4800 micromhos.
- 2C43 Lighthouse Triode. Has the same design features as the 2C40 except for a plate dissipation of 12 watts max., $\mu = 48$, and gm = 8000 micromhos.
- 6AG7-Y—Power Amplifier Pentode. Similar to type 6AG7 except for micanol base.
- 6AS7-G—Low-Mu Twin Triode. Heater-cathode type. Has high perveance, a μ of 2, and an ac plate resistance of 280 ohms. For use as a regulator tube in dc power supplies, and in projection television booster scanning applications.
- 6SJ7-Y—Triple-Grid Detector Amplifier. Same as type 6SJ7 except for micanol base.
- 12A6 Beam Power Amplifier, Metal type. Designed particularly for aircraft applications. Heater volts, 12.6. Max. plate volts, 250.
- 12L8GT—Twin-Pentode Power Amplifier. Heater volts, 12.6. Max. plate volts, 180. Plate dissipation per plate, 2.5 watts. Similar to type 1644.
- 12SW7—Duplex-Diode Triode. Heater-cathode type. Useful in aircraft receivers.
- 12SX7-GT—Twin-Triode Amplifier. Heater-cathode type. Useful in aircraft receivers.
- 12SY7—Pentagrid Converter. Single-ended metal type. Useful in aircraft receivers.
- 26A7-GT—Twin A-F Beam Power Amplifier. Heater volts, 26.5. Max. plate volts, 50. For 12-cell battery service.
- 1609 Amplifier Pentode. For low-microphonic applications. Filament volts, 1.1. Max. plate volts, 135.
- 1612 Pentagrid Amplifier. For low-microphonic applications. Heater volts, 6.3. Max. plate volts, 250. Similar to type 6L7.
- 1620 Triple-Grid Detector Amplifier. For low-microphonic applications. Heater volts, 6.3. Max. plate volts, 250. Similar to type 6J7.
- 1621 Power Amplifier Pentode. Metal type. For applications requiring continuity of service. Heater volts, 6.3. In push-pull service: Max. plate volts, 300; a-f power output, 5 watts.
- 1622 Beam Power Amplifier. Metal type. For applications requiring continuity of service. Heater volts, 6.3. In push-pull service: Max. plate volts, 300; power output, 10 watts.
- 1629 Electron-Ray Tube. Indicator type. Similar to type 6E5 except for a 12.6-volt heater and an octal base.

RCA QUICK-SELECTION GUIDE

TYPES FOR SPECIAL APPLICATIONS (cont'd)

METAL, GT, AND OTHER GLASS TYPES (cont'd)

- 1631 Beam Power Amplifier. Metal type. Similar to type 6L6 except for a 12.6-volt heater. Max. plate dissipation, 16 watts.
- 1632 Beam Power Amplifier. Metal type. Similar to type 25L6 except for 12.6-volt heater, and plate voltage and dissipation ratings.
- 1634 Twin-Triode Amplifier. Single-ended metal type. Same as 12SC7 but especially suited for applications requiring matched triode units.
- 1635 Class B Twin Amplifier. Heater-cathode type. For audio amplifier applications.
- 5890 Low-current beam pentode of the remote-cutoff type intended particularly for the regulation of high-voltage dc power supplies.
- 6026 Oscillator Triode. Subminiature type intended for transmitting service in radiosonde applications at 400 Mc.
- 6080 Low-Mu Twin Triode. Similar to type 6A57-G in characteristics, but is smaller in size. Intended for applications critical as to shock and vibration, and requiring reduced susceptibility to electrolysis.
- 6082 Same as 6080 but has 26.5-volt heater. Intended for use in aircraft receivers.

UHF "PENCIL" TUBES

- 5675 Medium-Mu Triode. For use in cathode-drive circuits at frequencies up to 3000 Mc/s. As a local oscillator, it is capable of giving a power output of 475 milliwatts at 1700 Mc/s.
- 5794 Fixed-Tuned Oscillator Triode. Intended for transmitting service in radiosonde application at 1680 Mc.
- 5876 High-Mu Triode. General purpose type. For use in cathode-drive circuits as an r-f amplifier, i-f amplifier, or mixer tube up to 1000 Mc/s; as a frequency multiplier up to 1500 Mc/s; and as an oscillator up to 1700 Mc/s. Delivers useful output of 5 watts at 500 Mc/s as an unmodulated Class C r-f amplifier, and 750 milliwatts as an oscillator at 1700 Mc/s.
- 5893 Medium-Mu Triode. Designed for use in cathode-drive circuits as a plate-pulsed oscillator at 3300 Mc/s and as a cw oscillator, rf power amplifier, and frequency doubler up to 1000 Mc/s.
- 6173 UHF Diode. For use in pulse detection and pulse-power-measuring service. May be operated at frequencies as high as 3300 Mc.

RCA QUICK-SELECTION GUIDE

UHF "PENCIL" TUBES (cont'd)

- 6263 Medium-Mu Triode. For use in cathode-drive, rf power amplifiers and oscillators in mobile transmitters operating up to 60000 feet without pressurized chambers. Under ICAS conditions, gives a useful power output of about 10 watts at 500 Mc. in unmodulated class C service with a plate input of only 14 watts.
- 6264 Like the 6263 but has a mu of 40. For frequency-amplifier service.

TYPES FOR ELECTRONIC-COMPUTER AND OTHER "ON-OFF" CONTROL APPLICATIONS

- 5915 Pentagrid Amplifier. 7-pin miniature type designed for use as a gated amplifier in electronic computers. Grids No. 1 and No. 3 can each be used as independent control electrodes.
- 5963 Medium-Mu Twin Triode. 9-pin miniature type intended for frequency-divider circuits in computers. Separate terminal for each cathode, and a mid-tapped heater for 6.3-volt or 12.6-volt operation.
- 5964 Medium-Mu Twin Triode. 7-pin miniature type intended for frequency-divider circuits in computers.
- 5965 Medium-Mu Triode. 9-pin miniature type. Balance of cutoff bias between the two units is closely controlled.
- 6197 Sharp-cutoff Power Pentode. 9-pin miniature type with a transconductance of 11000 micromhos. For frequency-divider and pulse amplifier service.
- 6211 Same as 5963 except that balance of cutoff bias between the two units is closely controlled.

KLYSTRONS

- 2K26 Single-resonator, reflex type oscillator for operation in the frequency range from 6250 to 7050 megacycles. It has a useful power output of about 100 milliwatts.

MECHANO-ELECTRONIC TRANSDUCER

- 5734 Triode type for applications involving the measurement of mechanical vibration. Has a minimum free cantilever resonance of the internal section of the plate shaft of 12000 cycles per second.

MAGNETRONS

- 2J41 Low-power, frequency-stabilized type with an integral magnet. Intended primarily for use as a pulsed oscillator at 9310 Mc in beacon service. Minimum peak stabilized power output of 300 watts at 9310 Mc and a duty cycle of 0.003.

RCA QUICK-SELECTION GUIDE

MAGNETRONS (cont'd)

- 2J50 Internal resonant-circuit type intended for pulsed-oscillator service, such as radar, at a fixed frequency of 8825 Mc. Will give a peak power output of 45 kilowatts when operated at 12000 peak anode volts.
- 4J50 Internal resonant-circuit type with an integral magnet. Intended for pulsed-oscillator service, such as radar, at a fixed frequency of 9375 ± 30 Mc. Will give a peak power output of 240 kilowatts when operated at 23000 peak anode volts.
- 4J52 Internal resonant-circuit type with magnet attached. Intended for pulsed-oscillator service at a fixed frequency of 9375 Mc. Will give a peak power output of 80 kilowatts when operated at 15000 peak anode volts.
- 6521 Internal-resonant circuit type with an integral magnet. Designed and conservatively rated for long, reliable performance as a pulsed oscillator at a fixed frequency of 5400 Mc in weather radar equipment.

SEMICONDUCTOR DEVICES

TRANSISTORS

Junction Types

- 2N77 } Germanium p-n-p alloy types. For low-power audio
- 2N104 } applications where extreme stability and excellent
- 2N105 } uniformity of characteristics are paramount. The 2N77
- } and 2N105 are especially useful in hearing-aid ap-
 } plications.
- 2N109—Germanium p-n-p alloy type. For large-signal audio applications such as class B push-pull power output stages of battery-operated portable radio receivers and audio amplifiers. Also useful as a high-gain class A driver. Provides high power sensitivity.

CRYSTAL DIODES

Germanium Point-Contact Types

- 1N34-A—General-purpose type for low-power rectification in applications such as isolating, clipping, and switching circuits, as well as in certain meter circuits.
- 1N38-A } Large-signal types having high peak inverse voltage
- 1N55-A } ratings. They are especially useful in electronic
- 1N58-A } computers, clamping, circuits, dc restorer circuits,
 } and in high voltage probes.
- 1N54-A—High-back-resistance type for use in clipping circuits, high-impedance high-voltage probes, dc restorer circuits, and high-impedance detector circuits.
- 1N56-A—High-conduction type featuring exceptionally low dynamic impedance. It is especially useful for limiter service in frequency modulation receivers.

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Direct Replacement Types

RCA types shown below are direct replacements under all circumstances for corresponding types to be replaced.

Type to be Replaced	Replace by RCA Type	Type to be Replaced	Replace by RCA Type
OA3/VR75	OA3	CE-23(A-D)	923
OC3/VR105	OC3	PJ-23	868
OD3/VR150	OD3	CE-25(A-D)	927
CE-1(A-D)	868, 918	RK-25	802
1P32	927	RK-25B	802
2AP1	2AP1-A	CE-28(A-D)	928
2B4	885	RK-28	803
ML-381	2C39-A	RK-28A	803
3X100A11	2C39-A	CE-29(A-D)	929, 1P39
ZP572	2C39-A	CE-30(A-D)	930, 1P40
2X2/879	2X2-A	CE-30V	925
3-50G2	834	RK-30	800
3AP1	3AP1-A	FG-32	5558
3BP1	3BP1-A	CE-34	934
3C45	6130/3C45	RK-39	807
3D22	3D22-A	CE-41	921
4D21	4-125A/4D21	CE-42	922
4-250A	4-250A/5D22	RK-44	837
4-400A	4-250A/5D22	RK-47	814
5BP1	5BP1-A	UH-50	834
5CP1	5CP1-A	R51A	927
5CP7	5CP7-A	CE-55	924
5D22	4-250A/5D22	FG-57	5559
5FP7	5FP7-A	RK-57	805
5HP1-A	5BP1-A*	RK-58	838
7BP7	7BP7-A	CE-59	5581
PJ-8	5556	R59A	868, 918
G9	868	R60A	920
BW-11	834	HY-61/807	807
CE-11V(A-D)	917	R61A	930
RK-11	1623	CE-64	5583
12DP7	12DP7-A	FG-67	5728/FG-67
FG-17	5557	VR75-30	OA3
CE-20	927	FG-95	5560
RK-20A	804	CE-98	5582
CE-21(A-D)	920	FG-104	5561

*Except in high-altitude service.

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Direct Replacement Types (cont'd)

RCA types shown below are direct replacements under all circumstances for corresponding types to be replaced.

Type to be Replaced	Replace by RCA Type	Type to be Replaced	Replace by RCA Type
VR105-30	OC3	WT-210-0070	5550
HFI20	211	WT-210-0071	5551
VR150-30	OD3	WT-210-0072	5552
WT-210-0001	2D21	WT-210-0073	5553
WT-210-0003	884	WT-210-0074	105
WT-210-0004	2050	WT-210-0078	172
WT-210-0006	6H6	WT-210-0079	105
WT-210-0008	866-A	WT-210-0081	65J7
WT-210-0009	84/6Z4	WT-210-0082	6V6
WT-210-0011	OC3	WT-210-0083	7K7
WT-210-0012	80	WT-210-0084	6N7-GT
WT-210-0013	5Z3	WT-210-0085	50B5
WT-210-0015	5557	WT-210-0086	833-A
WT-210-0018	OD3	WT-210-0087	6K8-GT
WT-210-0019	83	WT-210-0088	6J5-GT
WT-210-0021	6X5	WT-210-0089	6G6-G
WT-210-0025	117Z6-GT	WT-210-0090	6C6
WT-210-0027	872-A	WT-210-0091	0A4-G
WT-210-0028	3Q5-GT	211-D	211
WT-210-0029	6C5	FG-235A	5552
WT-210-0031	902-A	FG-238B	5555
WT-210-0037	117L7/M7-GT	242A	211
WT-210-0038	172	242B	211
WT-210-0040	6X4	WT-245	884
WT-210-0042	5Y3-GT	WT-246	2050
WT-210-0044	575-A	FG-258A	5553
WT-210-0045	892	FG-259B	5554
WT-210-0048	5U4-G	WT-261	6H6
WT 210-0052	2API-A	WE-261A	835
WT-210-0053	3API-A	WT-262	866-A
WT-210-0056	5559	WT-263	6Z4
WT-210-0057	5560	WT-269	OC3
WT-210-0058	676	WT-270	80
WT-210-0060	OZ4	WT-270X	5Z3
WT-210-0061	117N7-GT	FG-271	5551
WT-210-0062	5557	WT-272	5557
WT-210-0069	5557	WE-274B	5R4-GY

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Direct Replacement Types (cont'd)

RCA types shown below are direct replacements under all circumstances for corresponding types to be replaced.

Type to be Replaced	Replace by RCA Type	Type to be Replaced	Replace by RCA Type
WT-294	0D3	ML-728	5557
WE-295A	203-A	V/L-735	838
WT-301	83	801	801-A
UE-303A	203-A	811	811-A
WE-304B	834	812	812-A
F-307A	207	829	829-B
WT-308	6X5-GT	829-A	829-B
CE-309	5557	832	832-A
CE-311	3C23	833	833-A
UE-311	211	C-833	833-A
UE-311C	835	UH-50	834
UE-317C	217-C	857	857-B
WE-322A	803	862	862-A
WE-350A	807	866	866-A
375-A	575-A	866-A/866	866-A
WT-377	117Z6-GT	869-A	869-B
ML-381	2C39-A	872	872-A
WT-389	3Q5-GT	872-A/872	872-A
WT-390	6C5	F-872B	872-A
FJ-401	1P29	879	2X2-A
WE-403A	6AK5	889	889-A
GL-415	5550	893	893-A
GL-451	8020	902	902-A
ZP-572	2C39-A	UE-905	805
WT-606	2D21	905	905-A
WL-630	2050	906-PI	3API-A
WL-631	5559	908	908-A
KU-634	677	914	914-A
WL-651/656	5552	931	931-A
WL-652/657	5551	UE-938	838
WL-653B	5555	UE-949	849
WL-655/658	5553	UE-966A	866-A
672	672-A	UE-967	5557
678	5563-A	UE-972A	872-A
WL-679	5554	UE-975A	575-A
WL-681/686	5550	1640	6405/1640
NL-715	5557	1802-PI	5BPI-A

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Direct Replacement Types (cont'd)

RCA types shown below are direct replacements under all circumstances for corresponding types to be replaced.

Type to be Replaced	Replace by RCA Type	Type to be Replaced	Replace by RCA Type
1811-PI	7CPI	WTT-115	117N7-GT
1849	1850-A	WTT-117	5557
1850	1850-A	WTT-118	105
1854	6474/1854	WTT-119	172
1904	5728/FG-67	WTT-122	6SJ7
2051	2050	WTT-123	6V6
2525A5	5BPI-A	WTT-124	7K7
5604	5604-A	WTT-125	6N7-GT
5814	5814-A	WTT-126	50B5
8001	4E27/8001	WTT-127	833-A
8016	1B3-GT	WTT-128	6K8-GT
WTT-100	6X4	WTT-129	6J5-GT
WTT-102	5Y3-GT	WTT-130	6G6-G
WTT-103	6H6	WTT-131	6C6
WTT-104	575-A	WTT-132	0A4-G
WTT-105	892	WTT-135	5U4-G
WTT-111	5559	WTT-136	2API-A
WTT-112	5560	WTT-137	3API-A
WTT-113	676	WTT-149	172
WTT-114	0Z4		

NOTE: For additional replacement data on RCA Tubes for broadcasting and industry, see the 20-page RCA Interchangeability Directory (Form 1D-1020) listing 1600 industrial tube type numbers used by 24 manufacturers.

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Similar Types

RCA types shown below are not directly interchangeable with the types to be replaced because of mechanical and/or electrical differences. For more information as to degree of interchangeability, refer to respective tube data or write to Commercial Engineering, Harrison, New Jersey.

Type to be Replaced	Similar RCA Type	Type to be Replaced	Similar RCA Type
CE-IV(A-D)	930, 1P40	HV-18	806
CE-2(A-D)	917, 919	FV-20	8000
2B22	559	T-20	1623
2C38	2C39-A	TV-20	810
2E25	2E24	TZ-20	809
2E30	5618	PJ-21	5556
3B27	836	CE-22(A-D)	1P41
3B28	866-A	PJ-22	917
3C21	838	X-22	1616
3C24	1623	KU-23	806
3-25A3	809	RK-23	802
3-50A4	811-A	RK-23A	802
3-75A3	8005	24-G	808
3-250A4	806	HY-25	809
3-450A4	833-A	25T	809
3-1000A2	8000	RK-27	806
3-1000A4	810	FG-27A	5559
3X2500A3	5762/7C24	HY-30Z	809
4C21	211	CE-31V	919
		FG-33	5728/FG-67
4C22	8005	35T	811-A
4X150G	4X150A	35TG	808
CE5(A-D)	927	CE-36(A-D)	927
5C24	8000	RK-36	806
5D24	4-250A/5D22	RK-37	808
6D22	4X500A	RK-38	806
WT-6	6L6	HY-40	812-A
7C20	5762/7C24	T-40	812-A
7C25	5762/7C24	TZ-40	811-A
7C27	5762/7C24	HY-40Z	811-A
HV-12	806	RK-41	807
RK-12	809	RK-46	804
CE-13	868	RK87	814
CE-13V	917	RK-48A	813
G-15F	927	SR-50	917

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Similar Types (cont'd)

RCA types shown below are not directly interchangeable with the types to be replaced because of mechanical and/or electrical differences. For more information as to degree of interchangeability, refer to respective tube data or write to Commercial Engineering, Harrison, New Jersey.

Type to be Replaced	Similar RCA Type	Type to be Replaced	Similar RCA Type
HY-51A	830-B	100R	8020
HY-51B	830-B	100TH	810
HY-51Z	839	100TL	8000
RK-51	830-B	111-H	812-A
SR-51	926	ZB-120	838
RK-52	811-A	F123A	806
53AWB	927	HF-125	8005
SR-53	917	T-125	810
HK-54	808	F-127A	810
54-XH	3API-A	F-128A	851
T-55	8005	HF-130	835
HY-57	812-A	HF-140	211
R-58A	927	143D	2X2-A
58AWB	927	GL-146	805
59D	929	AB-150	845
CE-60	917	TW-150	810
HF-60	8005	150P	803
HY-60	807	150T	806
SK-60	868	152TH	806
T-60	8005	152TL	806
R61BV	929	GL-152	805
RK-63	806	HK-154	808
SK-63	918	T-155	806
RK-64	807	C-200	810
R64AV	925	HF-200	8000
HY-69	1624	T-200	806
V-70-D	8005	C-201	805
R71A	930, 1P40	C-202	805
R71AV	925	HD203-A	805
71D	929	HD-203C	805
FP-85	8020	HF-203H	8003
FP-85A	8020	WE-205D	10-Y
R85A	928	WE-205E	10-Y
CE-91R	1P37	WT-210-0007	6L6
HF-100	8005	WT-210-0067	3C23

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Similar Types (cont'd)

RCA types shown below are not directly interchangeable with the types to be replaced because of mechanical and/or electrical differences. For more information as to degree of interchangeability, refer to respective tube data or write to Commercial Engineering, Harrison, New Jersey.

Type to be Replaced	Similar RCA Type	Type to be Replaced	Similar RCA Type
211B	211	WE-274A	5R4-GY
211C	835	WE-281A	46
HD-211C	805	T-282A	8000
211E	835	WE-284B	845
212E	849	WE-284D	845
WE-214E	217-C	WE-287A	5557
WE-217-A	80	WE-298A	862-A
WE-220C	892	300	806
Z-225	866-A	WE-301A	83
WE-231D	864	T-303C	8000
WE-241B	833-A	UE-303U	8000
WE-242C	211	UE-304A	204-A
T-249B	866-A	WE-304B	6AK5
WE-249A	866-A	CE-306	676
WE-249B	866-A	WE-307A	807
250TH	810	UE-310	801-A
250TL	806	WE-310A	6C6
HF-250	8000	UE-311CH	8000
WE-251A	851	UE-311T	8003
WE-252A	842	UE-311CT	8003
HK-253	217-C	WE-312A	828
HK-254	810	315A	673
WE-254B	865	319A	872-A
WE-255B	869-B	321A	673
HF-258B	866-A	323B	3C23
WE-259A	24-A	WE-339A	807
260A	860	WE-341AA	891-R
HF-261A	835	F-342A	858
WE-264A	864	343A	858
WE-264B, C	864	WE-348A	1620
266B	857-B	C-350	807
WE-266C	857-B	WE-350B	807
WE-267B	872-A	353A	872-A
WE-268A	801-A	HK-354C	806
WE-271A	843	HK-354D	806

RCA INTERCHANGEABILITY DIRECTORY OF TUBES FOR COMMUNICATIONS AND INDUSTRY

Similar Types (cont'd)

RCA types shown below are not directly interchangeable with the types to be replaced because of mechanical and/or electrical differences. For more information as to degree of interchangeability, refer to respective tube data or write to Commercial Engineering, Harrison, New Jersey.

Type to be Replaced	Similar RCA Type	Type to be Replaced	Similar RCA Type
HK-354E	806	WL-739	927
HK-354F	806	WL-741	923
ML-356	5771	T-756	809
WE-356A	808	UE-812H	8005
WE-357A	833-A	T-814	806
F-357A	857-B	T-822	806
WE-359A	1C21	825	1623
WE-361A	835	C-849A	833-A
F-363A	892	C-849H	833-A
F-367A	673	F-857A	857-B
F-369B	869-B	861-A	861
F-376A	835	863	892
WE-393A	3C23	866-B	866-A
WE-394A	627	C-872	872-A
WE-395A	5823	UE-911CH	835
FJ-405	935	UE-942	842
WL-450	833-A	NL-1005	5551
WL-460	806	1603	1620, 5879
WL-463	806	1816-P4A	10FP4-A
UE-468	8000	1847	5527
WL-468	810	1851	6AC7
WL-471	8003	1899	2F21
WL-473	5762/7C24	2501-A3	3API-A
WL-481	8013-A	2501-C3	908-A
RH-507	1949	5514	811-A
DRJ-524	864	5516	2E24
GL-546	5696	5591	6AK5
578	8020	5604	889R-A
NL-615	5558	5606	892
WL-632A	5560	5654	6AK5
WL-632B	5560	5658	880
678	5563	5663	5696
NL-710	676	5666	889-A
NL-714	5557	5667	889R-A
WL-734	917	5668	892

**RCA INTERCHANGEABILITY DIRECTORY OF TUBES
FOR COMMUNICATIONS AND INDUSTRY**

Similar Types (cont'd)

RCA types shown below are not directly interchangeable with the types to be replaced because of mechanical and/or electrical differences. For more information as to degree of interchangeability, refer to respective tube data or write to Commercial Engineering, Harrison, New Jersey.

Type to be Replaced	Similar RCA Type	Type to be Replaced	Similar RCA Type
5669	892-R	6156	4-250A/5D22
5685/C6J	676	6333	892
5686	5763	6336	6080
5695	816	6346	5551
5720/FG-33	5728/FG-67	6347	5552
5725	6AS6	6348	5553
5736	5726/7C24	6394	6082
5788	5555	6445	892-R
5891	5671	6446	892
5918	5770	6447	892-R
5934	579-B	6626	6073
5959	6130/3C45	6627	6074
6140/423A	5651	AX9911	6130/3C45
6155	4D21/4-125A		

RCA RADIO BATTERIES

Radio-Engineered for Extra Listening Hours

RCA Type	Volts		Replaces		NEDA Type No.	Max. Overall Dimensions		
	A	B	Eve-ready	Burgess		L	W. or Dia.	Ht.

(For socket and terminal information see pages 97 and 98)

PORTABLE "A" TYPES

VS002	4½	—	746	G3	7	4	1⅞	4½
VS004	2½	—	742	4F	4	2⅞	2⅞	4½
VS005	1½	—	—	4FL	12	3½	1⅞	5⅞
VS009	6	—	744	F4PI	6	2⅞	2⅞	4¼
VS010	6	—	718	2F4	1	3⅞	2½	5½
VS011	6	—	747	2F4L	16	3⅞	1⅞	10¾
VS035	1½	—	935	1	14	—	1	1½
VS036	1½	—	950	2R	13	—	1⅞	2⅞
VS065	7½	—	717	C5	9	2⅞	2	3½
VS067	4½	—	736	F3	3	4	1⅞	4⅞
VS068	6	—	724	Z4	2	1⅞	1⅞	2⅞
VS069	1½	—	720	2D	18	2⅞	1⅞	2⅞
VS070	1½	—	960P	8R	23	—	1⅞	4½
VS072	4½	—	726	D3	19	3½	1⅞	2½
VS129	7½	—	713	B5	8	4⅞	½	3
VS141	1½	—	W353	2F	11	2⅞	1⅞	4¼
VS236	1½	—	964	21R	20	—	1⅞	4⅞

PORTABLE "B" TYPES

VS012	—	45	484	B30	207	4⅞	2⅞	5⅞
VS013	—	45	482	M30	202	3⅞	1½	5½
VS014	—	45	W359	A30	206	3⅞	2¼	4⅞
VS015	—	22½, 45	738	Z30	205	3	2¼	4
VS016	—	67½	467	XX45	200	2¾	1⅞	3¾
VS055	—	45	455	XX30	201	2½	1	3½
VS082	—	67½	457	K45	203	2½	1⅞	2⅞
VS086	—	45	415	U30	213	1⅞	⅞	3⅞
VS090	—	90	490	N60	204	3½	1⅞	3¾
VS215	—	67½	—	P45M	211M	1½	1	5⅞
VS216	—	67½	—	P45M	211M	1½	1½	5⅞
VS217	—	75	437	XX50	212	1½	1⅞	6¼
VS218	—	67½	477	P45	211P	1½	1	5⅞
VS219	—	90	479	P60	214	1½	1½	7½

• National Electronic Distributors Association

RCA RADIO BATTERIES

PORTABLE "A-B" PACKS

RCA Type	Volts		Replaces		NEDA * Type No.	Max. Overall Dimensions		
	A	B	Eve-ready	Burgess		L	W. or Dia.	Ht.
VS019	7½, 9	90	753	F6A60	401	9 ¹ / ₁₆	2¾	4¾
VS038	7½	63	W367	G5A42	408	8 ⁵ / ₁₆	2¾	4 ¹ / ₁₆
VS043	1½	90	—	5DA60	409	5½	2½	7½
VS046	6	75	—	G4B50	422	12 ⁵ / ₁₆	2¾	4½
VS047	9	90	752	G6B60	400	13 ⁵ / ₁₆	2¾	4 ¹ / ₁₆
VS050	6, 7½	75	755	T5Z50	403	8 ¹ / ₁₆	2 ⁷ / ₁₆	3½
VS052	1½	61½	—	4GA41	423	9 ³ / ₁₆	2½	3 ⁷ / ₁₆
VS053	1½	63	W366	4GA42	407	9 ¹ / ₁₆	2	4¾
VS054	1½	90	W369	6TA60	410	10	2 ⁵ / ₁₆	4½
VS057W	7½, 9	90	756	T6Z60	405	8½	2 ¹ / ₁₆	3¾
VS058	9	90	757	F6A60P	406	9½	2¾	4¾
VS059	9	90	756P	T6Z60P	428	8½	2 ⁷ / ₁₆	3¾
VS060	7½	75	—	T5Z50P	431	8 ¹ / ₁₆	2 ⁷ / ₁₆	3½
VS064	1½	90	729	4TZ60	425	7¾	2 ⁷ / ₁₆	3½

• National Electronic Distributors Association.

RCA Type	Volts			Replaces		NEDA * Type No.	Max. Overall Dimensions		
	A	B	C	Eve-ready	Burgess		L	W. or Dia.	Ht.

FARM "A-B" AND "B" TYPES

VS022	1½	90	—	759	17GD60	413	15¾	4¼	6½
VS026	—	22½, 45	—	W365P	2308P1	717	8 ¹ / ₁₆	3 ¹ / ₁₆	7 ¹ / ₁₆
VS045	1½	90	—	—	18GD60	426	12 ¹ / ₁₆	5 ³ / ₁₆	6½
VS119	7½, 9	90	—	—	—	415	8¼	4½	13 ³ / ₁₆

FLASHLIGHT AND LANTERN TYPES

VS034	1½	—	—	915	Z	15	—	1 ¹ / ₁₆	2
VS035	1½	—	—	935	I	14	—	1	1½
VS036	1½	—	—	950	2	13	—	1 ¹ / ₁₆	2 ³ / ₁₆
VS040C	6	—	—	510F	F4H	908	2½	2½	4 ¹ / ₁₆
VS040S	6	—	—	510S	F4BP	915	2½	2½	4 ¹ / ₁₆
VS073	1½	—	—	—	N	910	—	1 ¹ / ₁₆	1 ¹ / ₁₆
VS074	1½	—	—	912	7	24	—	1 ¹ / ₁₆	1 ¹ / ₁₆
VS138	3	—	—	W357	4F2H	901	3 ³ / ₁₆	2½	5 ³ / ₁₆

(For socket and terminal information see pages 97 and 98)

• National Electronic Distributors Association

RCA RADIO BATTERIES

INDUSTRIAL AND SPECIAL-PURPOSE BATTERIES

RCA Type	Volts			Replaces		NEDA * Type No.	Max. Overall Dimensions		
	A	B	C	Eve-ready	Burgess		L	W. or Dia.	Ht.
VS006C	1½	—	—	61GN	61GN	914	—	2⅝	6⅞
VS006S	1½	—	—	61GN	61GN	905	—	2⅝	6⅞
VS028	—	—	4½	781	5360	714	2⅞	1½	2⅞
VS029	—	—	7½ □	773	5540	713	3⅞	1½	2½
VS030	—	—	3, 4½	771	2370PI	718	3½	1⅞	2⅞
VS031	—	—	22½ ♦	768	5156PI	712	4	2½	3
VS039	6	—	—	1461	S461	907	10⅜	2⅞	7⅞
VS040S	6	—	—	510S	F4BP	915	2½	2½	4⅞
VS083	—	15	—	411	U10	208	1⅜	⅝	1⅞
VS084	—	22½	—	412	U15	215	1⅜	⅝	2
VS085	—	30	—	413	U20	210	1⅜	⅝	2⅞
VS087	per cell: 1.4 volts per stack: 21 volts			—	—	759	—	.491	.220
VS088	per cell: 1.4 volts per stack: 21 volts			—	—	760	—	.887	.226
VS093	—	300	—	493	U200	722	2⅝	2⅞	3½
VS100	3	—	—	W352	F2BP	701	2⅝	1⅞	4⅞
VS101	1½	—	—	W354	2FBP	700	2⅝	1⅞	4⅞
VS102	—	22½	—	763	4156	710	3⅞	2⅞	2⅞
VS103	6	—	—	706	4F4H	902	8⅞	2½	6⅞
VS106	1½	—	—	735	4FH	900	2½	2½	4⅞
VS112	—	22½, 45	—	W376	5308	709	4⅞	2⅞	5⅞
VS114	—	22½, 45	—	W350	Z30NX	711	3	1⅞	4½
VS126	—	22½, 45	—	W365F	2308SC	723	8⅞	3¼	7⅞
VS127	—	22½, 45	—	W363F	10308SC	716	8	4	7⅞
VS127W▶	—	22½, 45	—	—	10308SC	724	8	4	7⅞
VS130	—	—	4½ ••	761T	2370ST	712	3½	1⅞	3
VS131	—	—	22½ §	778	5156SC	708	4⅞	2½	3⅞
VS133	4½	—	—	703	532	706	2⅞	1½	2⅞
VS134	3	—	—	750	422	704	1⅞	¾	2⅞
VS136	3	—	—	W356	2F2H	703	2½	2½	4⅞
VS138	3	—	—	W357	4F2H	901	3⅞	2½	5⅞
VS139	7½	—	—	715	4F5H	903	7¼	4	6⅞
VS140	9	—	—	716	4F6H	904	8½	4⅞	6⅞
VS142	4½	—	—	751	432	705	2	¾	2⅞
VS157	—	22½, 45	—	W364F	21308SC	715	8⅞	4⅞	7½

• National Electronic Distributors Association.

▶ Wax coated.

□ Other voltage taps: 1½, 3, 4½, 6.

♦ Other voltage taps: 3, 4½, 16½.

•• Other voltage taps: 1½, 3.

§ Other voltage taps: 3, 4½, 6, 9, 10½, 16½.

TERMINAL GUIDE FOR RCA BATTERIES

Battery Type	Terminals	Battery Type	Terminals
VS002	Fig. 2	VS070	Fig. 1
VS004	Fig. 1	VS072	Fig. 2
VS005	Fig. 1	VS073	Flashlight
VS006C	2 Fahnestock Clips	VS074	Flashlight
VS006S	2 Screw Terminals	VS082	2 Snap Terminals
VS009	Fig. 3	VS083	Flashlight
VS010	Fig. 3	VS084	Flashlight
VS011	Fig. 3	VS085	Flashlight
VS012	Fig. 7	VS086	2 Snap Terminals
VS013	Fig. 6	VS087 }	{ Top and Bottom
VS014	Fig. 7	VS088 }	{ Surfaces
VS015	Fig. 8	VS090	2 Snap Terminals
VS016	2 Snap Terminals	VS093	2 Flush-Pin
VS019	Fig. 14		Jack-Terminals
VS022	Fig. 12	VS100	2 Screw
VS026	Fig. 5	VS101	2 Screw
VS028	2 Screw Terminals	VS102	2 Screw
VS029	5 Screw Terminals, 1 Pigtail	VS103	2 Screw
VS030	Fig. 9	VS106	2 Screw
VS031	Fig. 10	VS112	3 Screw
VS034	Flashlight	VS114	3 Screw
VS035	Flashlight	VS119	Fig. 13
VS036	Flashlight	VS126	3 Fahnestock Clips
VS038	Fig. 15	VS127	3 Fahnestock Clips
VS039	2 Screw Terminals	VS127W	3 Fahnestock Clips
VS040C	2 Coil-Spring Terminals	VS129	Fig. 4
VS040S	2 Screw Terminals	VS130	4 Screw
VS043	Fig. 12	VS131	8 Fahnestock Clips
VS045	Fig. 11	VS133	2 Flat-Spring Terminals
VS046	Fig. 17	VS134	2 Flat-Spring Terminals
VS047	Fig. 18	VS136	2 Screw
VS050	Fig. 16	VS138	2 Fahnestock Clips
VS052	Fig. 19	VS139	2 Screw
VS053	Fig. 19	VS140	2 Screw
VS054	Fig. 12	VS141	Fig. 1
VS055	2 Snap Terminals	VS142	2 Flat-Spring Terminals
VS057W	Fig. 14	VS157	3 Fahnestock Clips
VS058	Fig. 18	VS215	2 Snap Terminals
VS059	Fig. 18	VS216	2 Snap Terminals
VS060	Fig. 20	VS217	2 Snap Terminals
VS064	Fig. 12	VS218	2 Snap Terminals
VS065	Fig. 4	VS219	2 Snap Terminals
VS067	Fig. 2	VS236	Flashlight
VS068	Flashlight		
VS069	Fig. 1		

TERMINAL PATTERNS FOR RCA BATTERIES

<p>FIG. 1 "A"</p> <p style="text-align: center;">-A +1.5</p> <p style="text-align: center;">○ ○</p> <p>RETMA 101</p>	<p>FIG. 2 "A"</p> <p style="text-align: center;">-A +4.5</p> <p style="text-align: center;">○ ○</p> <p>RETMA 103</p>	<p>FIG. 3 "A"</p> <p style="text-align: center;">-A +6</p> <p style="text-align: center;">○ ○</p> <p>RETMA 104</p>
<p>FIG. 4 "A"</p> <p style="text-align: center;">-A +7.5</p> <p style="text-align: center;">○ ⊗ ○</p> <p>RETMA 105</p>	<p>FIG. 5 "B"</p> <p style="text-align: center;">-B ○</p> <p style="text-align: center;">+22.5 ○ ○ +45</p> <p>RETMA 107</p>	<p>FIG. 6 "B"</p> <p style="text-align: center;">-B ○</p> <p style="text-align: center;">-B ○ ○ +45</p> <p style="text-align: center;">⊗ ○ +45</p> <p>RETMA 110</p>
<p>FIG. 7 "B"</p> <p style="text-align: center;">-B ○ ○ -B</p> <p style="text-align: center;">⊗ +45 ○ ○ +45</p> <p>RETMA 111</p>	<p>FIG. 8 "B"</p> <p style="text-align: center;">-B ○ ○ -B</p> <p style="text-align: center;">+22.5 ○</p> <p style="text-align: center;">+45 ○ ○ +45</p> <p>RETMA 111</p>	<p>FIG. 9 "C"</p> <p style="text-align: center;">○ -4.5</p> <p style="text-align: center;">+C ○ ○ -3</p> <p>RETMA 112</p>
<p>FIG. 10 "C"</p> <p style="text-align: center;">-22.5 ○</p> <p style="text-align: center;">-3 ○ ○ +C</p> <p style="text-align: center;">-4.5 ○ ○ -16.5</p> <p>RETMA 113</p>	<p>FIG. 11 "A-B"</p> <p style="text-align: center;">+1.5A ○ ⊗</p> <p style="text-align: center;">⊗ ○ -B</p> <p style="text-align: center;">⊗ ⊗ ⊗</p> <p style="text-align: center;">-A ○ ○ +90B</p> <p>RETMA 115</p>	
<p>FIG. 12 "A-B"</p> <p style="text-align: center;">+90B ○ ○ -B</p> <p style="text-align: center;">+1.5A ○ ○ -A</p> <p>RETMA 115</p>	<p>FIG. 13 "A-B"</p> <p style="text-align: center;">+9A ○ ○ +90B</p> <p style="text-align: center;">-A ○ ○ -B</p> <p style="text-align: center;">+90B ○ ⊗ +9A</p> <p style="text-align: center;">⊗ ○ +7.5A</p> <p>RECESSED TERMINALS RETMA 116</p>	
<p>FIG. 14 "A-B"</p> <p style="text-align: center;">-B ○ ⊗</p> <p style="text-align: center;">⊗ ○ -A</p> <p style="text-align: center;">+90B ○ ⊗ ○ +9A</p> <p style="text-align: center;">⊗ ○ +7.5A</p> <p>RETMA 116</p>	<p>FIG. 15 "A-B"</p> <p style="text-align: center;">-B ○ ⊗</p> <p style="text-align: center;">⊗ ○ -A</p> <p style="text-align: center;">+63B ○ ⊗ ⊗</p> <p style="text-align: center;">⊗ ○ +7.5A</p> <p>RETMA 116</p>	<p>FIG. 16 "A-B"</p> <p style="text-align: center;">-B ○ ⊗</p> <p style="text-align: center;">⊗ ○ -A</p> <p style="text-align: center;">+75B ○ ⊗ ⊗</p> <p style="text-align: center;">+6A ○ ○ +7.5A</p> <p>RETMA 116</p>
<p>FIG. 17 "A-B"</p> <p style="text-align: center;">○ -B</p> <p style="text-align: center;">+75B ○</p> <p style="text-align: center;">-A ○ ○ +6A</p> <p>RECESSED TERMINALS</p>	<p>FIG. 18 "A-B"</p> <p style="text-align: center;">+9A ○ ○ +90B</p> <p style="text-align: center;">-A ○ ○ -B</p> <p>RECESSED TERMINALS</p>	<p>FIG. 19 "A-B"</p> <p style="text-align: center;">* ○ ○ -B</p> <p style="text-align: center;">+1.5A ○ ○ -A</p> <p style="text-align: center;">* VS052: +61.5B</p> <p style="text-align: center;">VS053: +63B</p>
	<p>FIG. 20 "A-B"</p> <p style="text-align: center;">⊗ ○ +75B</p> <p style="text-align: center;">○ +7.5A</p> <p style="text-align: center;">-A ○ ○ -B</p> <p>RECESSED TERMINALS</p>	

92CM-8792

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios

Make and Model	RCA Battery			Make and Model	RCA Battery		
	A	AB	B		A	AB	B
Admiral				Admiral (cont'd)			
L76P5	1-VS005		2-VS014	7P32			1-VS019
N28-G5	2-VS036		1-VS016	7P33			1-VS019
4B21	1-VS065		1-VS216	7P34			1-VS019
4B22	1-VS065		1-VS216	27-G4	2-VS036		1-VS016
4B24	1-VS065		1-VS216	28-G5	2-VS036		1-VS016
4B28	1-VS065		1-VS216	29-G5	2-VS036		1-VS016
4B29	1-VS065		1-VS216	51D4			1-VS054
4D11	2-VS036		1-VS016	76-P5	1-VS005		2-VS014
4D12	2-VS036		1-VS016	76-XP5	1-VS005		2-VS014
4D13	2-VS036		1-VS016	77-P5	1-VS005		2-VS014
4R1	1-VS065		1-VS016	77-XP5	1-VS005		2-VS014
4R11	1-VS065		1-VS016	78-P6	1-VS004		2-VS013
4R12	1-VS065		1-VS016	78-XP6	1-VS004		2-VS013
4T1	1-VS065		1-VS016	79-P6	1-VS004		2-VS013
4T11	1-VS065		1-VS016	79-XP6	1-VS004		2-VS013
4Y12	1-VS065		1-VS016	231-4F	1-VS004		2-VS014
4Y16	1-VS065		1-VS016	231-4Z	1-VS004		2-VS014
4Y18	1-VS065		1-VS016	3114D-PH	1-VS004		2-VS013
4W1	1-VS065		1-VS016	319-4Z	1-VS005		2-VS014
4W18	1-VS065		1-VS016	331-4F	1-VS004		2-VS014
4W19	1-VS065		1-VS016	335-4Z	1-VS004		2-VS013
4X1	2-VS236		1-VS216	635-4Z	1-VS004		2-VS013
4Y12	1-VS065		1-VS016	1035-4Z	1-VS004		2-VS013
4Y18	1-VS065		1-VS016	1644-D	1-VS004		2-VS013
4Y19	1-VS065		1-VS016				
4X11	2-VS236		1-VS216	Air-Castle (Spiegel)			
4Z1	1-VS065		1-VS016	BP115	1-VS010		2-VS013
4Z12	1-VS065		1-VS016	DM700	4-VS036		1-VS016
4Z14	1-VS065		1-VS016	EY760	4-VS036		1-VS016
4Z18	1-VS065		1-VS016	G-521	2-VS002		2-VS013
4Z19	1-VS065		1-VS016	76-74T	1-VS002		1-VS016
5F11	1-VS065		1-VS016	102-B	1-VS002		1-VS090
5F12	1-VS065		1-VS016	213	1-VS002		1-VS016
5H1	1-VS019			738B5400	1-VS072		1-VS090
5K32	1-VS057W			5027	2-VS002		2-VS013
5K34	1-VS057W			5028	2-VS036		1-VS016
5K38	1-VS057W			5029	2-VS036		1-VS016
5K39	1-VS057W			132564			1-VS022
6C11	1-VS019			147114	5-VS036		1-VS016
6E1	1-VS019						
6E1N	1-VS019			Airchief (Firestone)			
6F11	1-VS019			4C1	2-VS036		1-VS016
6F12	1-VS019			4C5	2-VS036		1-VS016
6P32	1-VS019			4C13	5-VS036		1-VS016
6Y1	1-VS019			4C16	1-VS067		1-VS090
6Y18	1-VS019			4C17	1-VS067		1-VS090
6Y19	1-VS019						

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios
(Continued)

Make and Model	RCA Battery			Make and Model	RCA Battery		
	A	AB	B		A	AB	B
Airchief (Firestone) (cont'd)				Airline (M-W) (Cont'd)			
4C18		1-VS019		1067	2-VS036	1-VS016	
4C19	1-VS067		1-VS090	1068	1-VS036	1-VS090	
4C20	1-VS067		1-VS090	1070		1-VS019	
4C21	2-VS067		1-VS013	1072	1-VS036	1-VS090	
4C22	2-VS236		1-VS216				
4C23		1-VS057W		Andrea			
4C24		1-VS057W		8663	2-VS067	2-VS013	
Air King				PI63	2-VS002	2-VS013	
A410	2-VS036		1-VS016	Arvin			
A425	1-VS036		1-VS016	140P		1-VS019	
A426	1-VS036		1-VS055	240P	3-VS036	1-VS016	
A427	1-VS036		1-VS055	241P	4-VS036	1-VS016	
A520	3-VS036		1-VS016	244P	4-VS036	1-VS016	
520A	1-VS129		1-VS016	250P		1-VS019	
3905	1-VS004		1-VS015	350P	6-VS035	1-VS090	
Airline (Mont-Ward)				350PB	6-VS035	1-VS090	
B4GCB-				350PL	6-VS035	1-VS090	
1062A	1-VS036		1-VS016	351P	6-VS035	1-VS090	
GSE-1077A	2-VS036		1-VS216	351PB	6-VS035	1-VS090	
GSE-1078A	2-VS036		1-VS216	351PL	6-VS035	1-VS090	
14BD9-815	4-VS036		1-VS016	352PL	6-VS035	1-VS090	
15BD11-917		1-VS019		353PL	6-VS035	1-VS090	
25GHM-				446P	2-VS036	1-VS016	
1073A		1-VS019		447P	2-VS036	1-VS016	
35GHM-				448P	6-VS035	1-VS016	
1073B		1-VS019		449P	6-VS035	1-VS016	
35GHM-				650P	6-VS035	2-VS055	
1073C		1-VS019		652P Series	6-VS035	2-VS055	
35GHM-				654P Series	6-VS035	2-VS055	
1074A	3-VS036		1-VS217	746P	1-VS236	1-VS216	
62TL-1062	1-VS036		1-VS016	747P	1-VS236	1-VS216	
64WG-				852P	5-VS035	2-VS055	
1054A		1-VS019		854P	5-VS035	2-VS055	
74KR-				Automatic			
1210A		1-VS019		Tom Thumb			
74WG-				(Buddy)	2-VS036	1-VS016	
1054A		1-VS019		Tom Thumb			
74WG-				(Camera)	2-VS036	1-VS016	
1056A		1-VS019		(Bike) B44	2-VS036	1-VS016	
84WG-				C-51	2-VS067	2-VS013	
1060A	4-VS036		1-VS016	C-54	2-VS067	2-VS013	
94WG-				C-60	1-VS011	2-VS013	
1059A		1-VS019		C65	1-VS011	2-VS013	
1064A	1-VS036		1-VS016				

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios

(Continued)

Make and Model	RCA Battery		
	A	AB	B

Bendix

PMR-3A	1-VS036	1-VS016	
PAR-80		1-VS019	
PMR-3A	1-VS036	1-VS016	
55X4	4-VS035	1-VS016	
416A		1-VS022	
687A		1-VS019	

Capehart

10	1-VS036	1-VS016	
15		1-VS057W	
P213	2-VS236	1-VS216	
1P55	2-VS236	1-VS216	

Cavalier

4P3		1-VS057W	
-----	--	----------	--

Clarion

13201		1-VS022	
13203		1-VS022	

CBS-Columbia

525	1-VS129	1-VS016	
526	1-VS129	1-VS016	
5110	2-VS035	1-VS216	
5220	1-VS065	1-VS216	

Concord

1-611	2-VS002	2-VS013	
-------	---------	---------	--

Continental

B-5400	1-VS072	1-VS090	
--------	---------	---------	--

Coronado

RA37-43-			
9855	2-VS236	1-VS216	
RA33-9856D		1-VS019	
RA42-9850A	2-VS036	1-VS016	
35RA4-43-			
9856A		1-VS019	
94RA31	1-VS002	1-VS106	

Crosley

9-101		1-VS022	
9-302		1-VS019	
9-304	2-VS036	1-VS016	
9-307M		1-VS057W	
10-304M	1-VS067	1-VS090	

Make and Model	RCA Battery		
	A	AB	B

Crosley (cont'd)

10-307M		1-VS057W	
10-308		1-VS057W	
10-309		1-VS057W	
11-301U	1-VS036	1-VS016	
11-302U	1-VS036	1-VS016	
11-303U	1-VS036	1-VS016	
11-304U	1-VS036	1-VS016	
11-305U	1-VS036	1-VS016	
F-100	2-VS236	1-VS217	
F110BE	2-VS236	1-VS217	
F110BK	2-VS236	1-VS217	
F110CE	2-VS236	1-VS217	
F110GN	2-VS236	1-VS217	
F110RD	2-VS236	1-VS217	
F115		1-VS058	

Detrola

610-A		1-VS022	
3891	2-VS002	2-VS013	
3892	2-VS002	2-VS013	
3893	2-VS002	2-VS013	

Dewald

A-507	2-VS067	2-VS013	
B-400	2-VS036	1-VS016	
B-402	1-VS002	1-VS016	
B-504	1-VS002	1-VS016	
B-515	1-VS002	1-VS016	
C-504	1-VS067	1-VS016	
C-515	1-VS067	1-VS016	
D-508	2-VS002	2-VS013	
D-517	1-VS067	1-VS016	
D-517A	1-VS067	1-VS090	
F-504		1-VS022	
G-408	2-VS236	1-VS216	
H-527	1-VS065	1-VS216	
H-528	1-VS065	1-VS216	

Dynavox

3P801	2-VS036	1-VS016	
-------	---------	---------	--

Emerson

CE-259	1-VS004	2-VS013	
CE-263	1-VS004	2-VS013	

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios
(Continued)

Make and Model	RCA Battery			Make and Model	RCA Battery		
	A	AB	B		A	AB	B
Emerson (cont'd)				Emerson (cont'd)			
CE-265	1-VS004		2-VS013	432	1-VS036		1-VS016
CE-275	1-VS004		2-VS013	505	2-VS067		2-VS013
CT-275	1-VS004		2-VS013	508	1-VS036		1-VS016
CX-263	1-VS004		2-VS013	523	2-VS067		2-VS013
CX-283	1-VS004		2-VS013	536	2-VS067		2-VS013
CX-284	1-VS004		2-VS013	536A	2-VS067		2-VS013
CX-292	1-VS004		2-VS013	551A	2-VS067		2-VS013
CX-305	2-VS067		2-VS013	553A	2-VS067		2-VS013
CX-308	1-VS004		2-VS013	558	2-VS036		1-VS016
DA-338	2-VS067		2-VS013	559A	1-VS067		1-VS016
DC-308	2-VS067		2-VS013	559AA	1-VS067		1-VS090
DF-302	2-VS067		2-VS013	560	1-VS067		1-VS016
DF-306	2-VS067		2-VS013	560A	1-VS067		1-VS090
DJ-310	2-VS067		2-VS013	567	1-VS067		1-VS090
DJ-311	2-VS067		2-VS013	568A		1-VS019	
DJ-312	2-VS067		2-VS013	570	3-VS036		1-VS016
DU-379	2-VS036		1-VS016	574	3-VS036		1-VS016
DU300	2-VS036		1-VS016	575		1-VS019	
EA312	2-VS067		2-VS013	575A		1-VS019	
EA338	2-VS067		2-VS013	580	3-VS036		1-VS016
EA357A	2-VS067		2-VS013	584	1-VS068		1-VS090
EA385	2-VS067		2-VS013	613A	1-VS036		1-VS016
EA389	2-VS067		2-VS013	640	1-VS036		1-VS016
EA402	2-VS067		2-VS013	643A	2-VS067		2-VS013
EA1341	2-VS067		2-VS013	645	1-VS069		1-VS016
EE390	2-VS067		2-VS013	646A	1-VS072		1-VS090
EE401	2-VS067		2-VS013	646B	1-VS072		1-VS090
EF363	2-VS067		2-VS013	656B		1-VS019	
FU424	2-VS067		2-VS013	657B		1-VS019	
FU427	2-VS067		2-VS013	704	2-VS236		1-VS216
FU428	2-VS067		2-VS013	705	2-VS236		1-VS216
FF411	2-VS036		1-VS016	745B		1-VS057W	
33	2-VS067		2-VS013	746B		1-VS057W	
34	2-VS067		2-VS013	747	1-VS035		1-VS086
302	2-VS067		2-VS013	754		1-VS057W	
338	2-VS067		2-VS013	754D		1-VS057W	
339	2-VS067		2-VS013	790B	1-VS072		1-VS090
340	2-VS067		2-VS013	601	2-VS236		1-VS216
341	2-VS067		2-VS013				
357	2-VS067		2-VS013				
363	2-VS067		2-VS013				
401	2-VS067		2-VS013				
402	2-VS067		2-VS013				
424	2-VS067		2-VS013				
427	2-VS067		2-VS013				
428	2-VS067		2-VS013				
				Fada			
				P80	2-VS036		1-VS016
				P82	2-VS067		2-VS013
				P100	2-VS067		2-VS013
				P111	3-VS036		1-VS016
				P130	2-VS002		2-VS013

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios

(Continued)

Make and Model	RCA Battery		
	A	AB	B
Firestone			
4C22	2-VS236		1-VS216
4C24		1-VS019	
Garod			
4B1	3-VS036		1-VS016
5D3	5-VS036		1-VS016
5D4	5-VS036		1-VS016
5D5	5-VS036		1-VS016
6E1	2-VS002		2-VS013
General Electric			
G8400	1-VS004		2-VS013
G8440	1-VS004		2-VS013
H8401	1-VS004		2-VS013
H8402	1-VS004		2-VS015
H8403	1-VS004		2-VS015
H8408	1-VS004		2-VS013
H8410	1-VS004		2-VS015
H8411	1-VS004		2-VS015
H8412	1-VS011		2-VS013
H8504	1-VS010		2-VS013
H8505	1-VS010		2-VS013
H8508	1-VS010		2-VS013
H8X467	1-VS004		2-VS015
JB410	2-VS036		1-VS016
JB508	1-VS011		2-VS013
JB513	1-VS011		2-VS013
JB514	1-VS011		2-VS013
JB523	1-VS011		2-VS013
JB524	1-VS011		2-VS013
JB630	2-VS067		2-VS013
JB631	2-VS067		2-VS013
LB412	2-VS036		1-VS016
LB502	2-VS036		1-VS016
LB603	2-VS036		1-VS016
LB612	2-VS036		1-VS016
LB641	2-VS036		1-VS016
LB642	2-VS036		1-VS016
LB673	2-VS067		2-VS013
LB700	2-VS067		2-VS013
LB701	2-VS067		2-VS013
LB702	2-VS067		2-VS013
LB703	2-VS067		2-VS013
I40	2-VS036		1-VS016
I41		1-VS057W	
I43		1-VS057W	

Make and Model	RCA Battery		
	A	AB	B
General Electric (cont'd)			
145	2-VS036		1-VS016
150		1-VS019	
165		1-VS019	
254	2-VS067		2-VS013
600		1-VS057W	
601		1-VS057W	
602		1-VS057W	
603		1-VS057W	
604		1-VS057W	
605	1-VS065		1-VS016
606	1-VS065		1-VS016
607	1-VS065		1-VS016
608	1-VS065		1-VS016
610		1-VS057W	
611		1-VS057W	
612	1-VS065		1-VS016
613	1-VS065		1-VS016
614		1-VS019	
615		1-VS019	
620	2-VS236		1-VS217
621	2-VS236		1-VS217
622	2-VS236		1-VS217
625	1-VS065		1-VS016
626	1-VS065		1-VS016
630	2-VS236		1-VS016
631	2-VS236		1-VS016
632	2-VS236		1-VS016
640		1-VS019	
641		1-VS019	
650		1-VS019	
Gilfillan			
5L-66B Series		1-VS019	
688D		1-VS019	
Globe			
454	2-VS036		1-VS016
456	2-VS036		1-VS016
Grantline			
508-7	5-VS036		1-VS016
Hallicrafters			
S72		1-VS019	
S-72-1950		1-VS019	
S72L		1-VS019	
5R24	1-VS065		1-VS090

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios

(Continued)

Make and Model	RCA Battery			Make and Model	RCA Battery		
	A	AB	B		A	AB	B
Hallicrafters (cont'd)				Meck			
5R40	1-VS065		1-VS090	CM500	5-VS036		2-VS055
SR1000		1-VS058		DM700	4-VS036		1-VS016
TW25	1-VS065		1-VS090	EV760	4-VS036		1-VS016
TW500		1-VS058		Mitchell			
TW600		1-VS058		1256	1-VS067		1-VS090
TW1000		1-VS047		1276	1-VS067		1-VS090
TW2000		1-VS047		1277	1-VS067		1-VS090
Jewel				Mitchell Industries			
304	1-VS036		1-VS016	AT-92-50	2-VS036		2-VS016
349	1-VS065		1-VS090	(Airboy Sr.)			
801	1-VS036		1-VS016	1276	1-VS067		1-VS090
814	1-VS036		1-VS016	1277	1-VS067		1-VS090
901	1-VS036		1-VS016	1287		1-VS019	
949	1-VS065		1-VS090	Motorola (Galvin)			
5007	1-VS065		1-VS016	AI	2-VS036		1-VS016
5010	1-VS065		1-VS016	AR-96-23	2-VS036		1-VS016
5050	1-VS065		1-VS090	AT-99-22	1-VS009		2-VS013
5310	2-VS236		1-VS216	3A5	5-VS036		1-VS016
Knight				5A1	2-VS036		1-VS016
4D450	3-VS036		1-VS016	5A5	2-VS036		1-VS016
4J707	1-VS065		1-VS090	5A7	2-VS036		1-VS016
4J708	2-VS067		2-VS013	5A7A	2-VS036		1-VS016
4K717	2-VS236		1-VS216	5A9 Series	2-VS036		1-VS016
5C290	2-VS067		2-VS013	5J1	2-VS036		1-VS016
5D455	5-VS036		1-VS016	5J1U	2-VS036		1-VS016
5F565	2-VS036		1-VS016	5L1	2-VS036		1-VS016
6A127	2-VS067		2-VS013	5L1U	2-VS036		1-VS016
6K718	2-VS067		2-VS013	5M1	2-VS036		1-VS016
145-D	5-VS036		1-VS016	5M1U	2-VS036		1-VS016
156-D	3-VS036		1-VS016	5M2	2-VS036		1-VS016
449		1-VS019		5M2U	2-VS036		1-VS016
Learadio				6L1		1-VS019	
RM402C		1-VS019		6L2		1-VS019	
Lewyt				41D	1-VS004		2-VS013
711	2-VS002		2-VS013	41D1	1-VS004		2-VS013
Magictone				41D2	1-VS004		2-VS013
510	1-VS036		1-VS016	41H	1-VS004		2-VS013
Majestic				48L11	2-VS036		1-VS016
4L1	2-VS236		1-VS217	49L11Q	2-VS036		1-VS016
4P1	2-VS036		1-VS090	49L13Q	2-VS036		1-VS016
5M1	1-VS236		1-VS218	51D	1-VS004		2-VS013
				51M1U	2-VS036		1-VS016
				51M2U	2-VS036		1-VS016

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios

(Continued)

Make and Model	RCA Battery		
	A	AB	B
Motorola (Galvin) (cont'd)			
51D1	1-VS004	2-VS013	
51D2	1-VS004	2-VS013	
51F	1-VS004	2-VS015	
52D	1-VS004	2-VS013	
52D1	1-VS004	2-VS013	
52L	2-VS236	1-VS216	
52M Series	2-VS036	1-VS016	
53LC1	2-VS236	1-VS216	
53LC2	2-VS236	1-VS216	
53LC3	2-VS236	1-VS216	
54L1	2-VS036	1-VS216	
54L2	2-VS036	1-VS216	
54L3	2-VS036	1-VS216	
54L4	2-VS036	1-VS216	
54L5	2-VS036	1-VS216	
54L6	2-VS036	1-VS216	
57BP	2-VS067	2-VS013	
57BP1	2-VS067	2-VS013	
57BP1A	2-VS067	2-VS013	
57BP2	2-VS067	2-VS013	
57BP2A	2-VS067	2-VS013	
57BP3	2-VS067	2-VS013	
57BP3A	2-VS067	2-VS013	
57BP4	2-VS067	2-VS013	
57BP4A	2-VS067	2-VS013	
58L11	2-VS036	1-VS016	
59L11Q	2-VS036	1-VS016	
59L12Q	2-VS036	1-VS016	
59L14Q	2-VS036	1-VS016	
61-L11	2-VS067	2-VS013	
61-L12	2-VS067	2-VS013	
62L1U	1-VS057W		
62L2U	1-VS057W		
62L3U	1-VS057W		
63L1	1-VS057W		
63L2	1-VS057W		
63L3	1-VS057W		
63LSS	1-VS057W		
65BP	2-VS067	2-VS013	
65BP1	2-VS067	2-VS013	
65BP1A	2-VS067	2-VS013	
65BP2	2-VS067	2-VS013	
65BP2A	2-VS067	2-VS013	
65BP3	2-VS067	2-VS013	
65BP3A	2-VS067	2-VS013	
65BP4	2-VS067	2-VS013	

Make and Model	RCA Battery		
	A	AB	B
Motorola (Galvin) (cont'd)			
65BP4A	2-VS067	2-VS013	
65L11	2-VS067	2-VS013	
65L12	2-VS067	2-VS013	
67L11		1-VS019	
68L11		1-VS019	
69L11		1-VS019	
Norelco Philips			
LX422AB	2-VS036	2-VS016	
LX527AB	7-VS036	2-VS015	
Olympic			
6-606	2-VS067	2-VS013	
6-606A	2-VS067	2-VS013	
6-606U	2-VS067	2-VS013	
7-526	2-VS067	2-VS013	
8-451	1-VS036	1-VS016	
8-452	2-VS036	1-VS016	
9-452	2-VS002	2-VS013	
445	2-VS236	1-VS217	
489	1-VS036	1-VS016	
Philco			
B650	2-VS236	1-VS217	
B652	2-VS236	1-VS217	
PT-87		1-VS038	
PT-88		1-VS038	
39-71T	1-VS004	2-VS013	
39-72T	1-VS004	2-VS013	
39-73T	1-VS004	2-VS013	
39-74T	1-VS004	2-VS013	
39-75		1-VS053	
39-504T	1-VS004	2-VS013	
40-PT63		1-VS053	
40-74T	1-VS004	2-VS013	
40-504T	1-VS004	2-VS013	
41-PT63		1-VS053	
41-841		1-VS019	
41-842T	2-VS067	2-VS013	
41-843T	2-VS067	2-VS013	
41-844T	2-VS067	2-VS013	
41-851		1-VS019	
41-853T	2-VS067	2-VS013	
41-854T	2-VS067	2-VS013	
41-8030		1-VS022	
42-PT-87		1-VS038	

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios

(Continued)

Make and Model	RCA Battery			Make and Model	RCA Battery		
	A	AB	B		A	AB	B
Philco (cont'd)				RCA (cont'd)			
42-PT-88		1-VS038		BX57		1-VS050	
42-842	2-VS067	2-VS013		B411	1-VS036	1-VS016	
42-843	2-VS067	2-VS013		P5	1-VS004	2-VS013	
42-844	2-VS067	2-VS013		QB55		1-VS022	
42-853	2-VS067	2-VS013		QB55X		1-VS022	
42-854	2-VS067	2-VS013		QB60		1-VS022	
46-350		1-VS019		2B400	2-VS236	1-VS216	
46-131		1-VS022		2B401	2-VS236	1-VS216	
48-150		1-VS022		2B402	2-VS236	1-VS216	
48-300		1-VS019		2B403	2-VS236	1-VS216	
48-360		1-VS019		2B404	2-VS236	1-VS216	
48-601		1-VS057W		2B405	2-VS236	1-VS216	
48-602		1-VS057W		2BX63		1-VS057W	
49-101		1-VS019		3BX51		1-VS050	
49-601		1-VS057W		3BX52		1-VS050	
49-602		1-VS057W		3BX53		1-VS050	
49-605		1-VS019		3BX54		1-VS050	
49-607		1-VS019		3BX61		1-VS047	
50-620		1-VS057W		3BX671		1-VS047	
50-621		1-VS057W		3BX672		1-VS047	
51-629		1-VS064		4QB3		1-VS022	
51-631	2-VS036	1-VS016		4QB3X		1-VS022	
52-643		1-VS057W		5BX41	2-VS036	1-VS216	
53-650	2-VS236	1-VS217		6B4A	1-VS036	1-VS016	
53-651	2-VS036	1-VS016		6B4B	1-VS036	1-VS016	
53-652	2-VS236	1-VS217		6B5	1-VS036	1-VS016	
53-656		1-VS057W		6BX5	2-VS036	1-VS216	
53-658		1-VS057W		6BX6A	2-VS036	1-VS216	
				6BX6B	2-VS036	1-VS216	
				6BX6C	2-VS036	1-VS216	
Philips							
See Norelco Philips							
Philmore Kit							
300-3	1-VS072	1-VS090		6BX8A		1-VS050	
				6BX8B		1-VS050	
				6BX41A	2-VS036	1-VS216	
				6BX41B	2-VS036	1-VS216	
				6BX63		1-VS057W	
				8BX5		1-VS050	
				8BX6		1-VS019	
				8BX54		1-VS050	
				8BX55		1-VS050	
				8B41	1-VS036	1-VS016	
				8B42	1-VS036	1-VS016	
				8B43	1-VS036	1-VS016	
				8F43		1-VS022	
				9BX5		1-VS050	
				9BX6		1-VS019	
				9BX55		1-VS050	

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios

(Continued)

Make and Model	RCA Battery			Make and Model	RCA Battery		
	A	AB	B		A	AB	B
RCA (cont'd)				PP5461			
98X56	1-VS065		1-VS016	5-VS036		2-VS055	
15BP				Revere			
Series	1-VS004		2-VS013	400	1-VS065	1-VS016	
25BP	1-VS004		2-VS013	Roland			
26BP	2-VS067		2-VS013	4P2	2-VS035	1-VS216	
36BP	2-VS067		2-VS013	5P2		1-VS057W	
54B1	1-VS036		1-VS016	5P4		1-VS057W	
54B1-N	1-VS036		1-VS016	6P2		1-VS057W	
54B2	1-VS036		1-VS016	Sentinel			
54B3	1-VS036		1-VS016	1U312PG	1-VS067	1-VS090	
54B5	1-VS036		1-VS016	1U312PW	1-VS067	1-VS090	
55F		1-VS022		1U316PM	1-VS067	1-VS016	
58B	1-VS036		1-VS016	1U316PT	1-VS067	1-VS016	
64F1		1-VS022		1U335PG	1-VS067	1-VS090	
64F2		1-VS022		1U335PI	1-VS067	1-VS090	
64F3		1-VS022		1U335PM	1-VS067	1-VS090	
65F		1-VS022		1U335PW	1-VS067	1-VS090	
66BX		1-VS019		285P	2-VS067	2-VS013	
94BP4	1-VS004		2-VS013	312P	5-VS036	2-VS055	
94BP61	1-VS004		2-VS013	312PG	1-VS067	1-VS090	
94BP62	1-VS004		2-VS013	312PW	1-VS067	1-VS090	
94BP64	1-VS004		2-VS013	316P	1-VS067	1-VS016	
94BP66	1-VS004		2-VS013	319P	1-VS067	1-VS090	
94BP80	1-VS004		2-VS013	326P	2-VS036	1-VS016	
94BP81	1-VS004		2-VS013	335PG	1-VS067	1-VS090	
96GA	1-VS004		2-VS013	335PI	1-VS067	1-VS090	
Raytheon				335PM			
PR51	1-VS065		1-VS090	335PW	1-VS067	1-VS090	
PR51A	1-VS065		1-VS090	345-P	1-VS002	1-VS090	
PR52	1-VS065		1-VS090	347P	2-VS036	1-VS216	
Regal				348P			
BP47	1-VS036		1-VS016	Setchell-Carlson			
BP48	1-VS036		1-VS016	447		1-VS019	
P-175	2-VS002		2-VS013	449		1-VS019	
747	5-VS036		1-VS016	501	3-VS036	1-VS013	
777	5-VS036		1-VS016	Signal			
1500		1-VS022		141	1-VS036	1-VS055	
1377	1-VS002		1-VS016	341A	1-VS067	1-VS016	
1878	1-VS067		1-VS016	Silvertone (Sears)			
Remier				210			
93	1-VS004		2-VS015	215	2-VS036	1-VS016	
94	1-VS004		2-VS015	215	2-VS036	1-VS016	
95	1-VS004		2-VS015	220		1-VS019	
5400	5-VS036		1-VS016	225		1-VS019	
5410	5-VS036		1-VS016				

RCA BATTERY REPLACEMENT GUIDE

For 1948 to 1955 Portable Radios
(Continued)

Make and Model	RCA Battery		
	A	AB	B

Westinghouse (cont'd)

423P4	2-VS236	1-VS217	
424P4	2-VS236	1-VS217	
425P4	2-VS236	1-VS217	

Zenith

G500		1-VS047	
G503		1-VS058	
H412T		1-VS045	
H500		1-VS047	
H503		1-VS058	
J402		1-VS058	
J504		1-VS058	
J504Y		1-VS058	
K401 Series	3-VS036	1-VS016	
L401	3-VS036	1-VS216	
L403 Series	2-VS236	1-VS216	
L406R		1-VS058	
L505		1-VS059	
L507		1-VS058	
L600	1-VS070	1-VS047	

Make and Model	RCA Battery		
	A	AB	B

Zenith (Cont'd)

4G800	1-VS036	1-VS016	
4G903		1-VS058	
4G903Y		1-VS058	
4G908		1-VS058	
4K400	1-VS004	2-VS013	
4K400D	1-VS004	2-VS013	
4K400L	1-VS004	2-VS013	
4K400M	1-VS004	2-VS013	
4K400S	1-VS004	2-VS013	
4K400Y	1-VS004	2-VS013	
4K600	2-VS036	1-VS016	
5G500		1-VS046	
5G500R Series		1-VS047	
5G501		1-VS047	
5G504		1-VS046	
5K603		1-VS046	
6G001Y		1-VS047	
6G004Y		1-VS047	
6G801		1-VS058	
401		1-VS058	
5416	1-VS004	2-VS013	

RCA MINIATURE LAMPS


FLASHLIGHT TYPES

Type No.	Filament		Bulb Outline*	Bead Color	Use with RCA Battery	
	Volts	Amps.				
PR-2	2.4	0.50	F	Blue	VS036	(Two)
PR-3	3.6	0.50	F	Green	VS036	(Three)
FR-6	2.5	0.30	F	Brown	VS036	(Two)
13	3.8	0.30	C	Green	VS036	(Three)
14	2.5	0.30	C	Blue	VS036	(Two)
112	1.1	0.22	B	Pink	VS034	(One)
222	2.2	0.25	B	White	VS034	(Two)
233	2.3	0.27	C	Purple	VS035	(Two)

RADIO PANEL AND MISCELLANEOUS TYPES


Type No.	Filament		Bulb Outline*	Bead Color	Service
	Volts	Amps.			
40	6 to 8	0.15	E	Brown	Radio Panel
41	2.5	0.50	E	White	Radio Panel
42	3.2	0.35	E	Green	Radio Panel
43	2.5	0.50	D	White	Radio Panel
44	6 to 8	0.25	D	Blue	Radio Panel
45	3.2	0.35	D	Green	Radio Panel
46	6 to 8	0.25	E	Blue	Radio Panel
47	6 to 8	0.15	D	Brown	Radio Panel
48	2.0	0.06	E	Pink	Radio Panel
49	2.0	0.06	D	Pink	Radio Panel
50	6 to 8	1-candle power	C	White	Radio Panel
51	6 to 8	1-candle power	G	White	Radio Panel
55	6 to 8	2-candle power	A	White	Radio Panel Test Instrument
291	2.9	0.17	E	White	Radio Panel
292	2.9	0.17	E	White	Pin-Game Machine
1490	3.2	0.16	D	White	Radio Panel

*DIMENSIONAL OUTLINES




G-4 1/2 BULB
MINIATURE
BAYONET BASE

A




TL-3 BULB
MINIATURE
SCREW BASE

B




G-3 1/2 BULB
MINIATURE
SCREW BASE

C




T-3 1/4 BULB
MINIATURE
BAYONET BASE

D




T-3 1/4 BULB
MINIATURE
SCREW BASE

E



B-3 1/2 BULB
MINIATURE
FLANGE BASE

F



G-3 1/2 BULB
MINIATURE
BAYONET BASE

G

RCA TELEVISION COMPONENTS

- Deflecting Yokes
- Horizontal-Output and High-Voltage Transformers
- Blocking-Oscillator Transformers
- Vertical-Output Transformers
- Ion-Trap Magnets
- Linearity and Width Controls
- Focus Coils
- Power Transformers
- Conversion Kit

DEFLECTING YOKES (For Use with Kinescopes)

Horizontal Coil Inductance mh	Vertical Coil DC Resistance ohms	Deflection Angle degrees	RCA Type
8.3	64.6	57	201D12
8.4	68	57	207D1
10.3	48.7	70	206D1
12	42	90	237D1†
12.5	68.8	57	205D1
13.3	48	70	209D1
13.3	48	70	211D2*
18.5	44	90	235D1*
18.5	48	70	222D1*
20	42	90	236D1*
28.5	3.3	70	214D1*

†Supplied with damping and neutralizing elements.

*Supplied with color-coded leads, damping and neutralizing elements.

DEFLECTING YOKES (For use with Camera Tubes)

Horizontal Coil Inductance mh	Typical Tube Type	RCA Type
0.9	6198, 6326	216D1
5.5	5820	210D1
5.5	2F21, 1699	201D77
8.0	5WP15, 5ZP16	212D1

HORIZONTAL-OUTPUT AND HIGH-VOLTAGE TRANSFORMERS

DC Output (No Load) Kv	For Typical Yoke		RCA Type
	Deflection Angle degrees	Horizontal Coil Inductance mh	
8.75	57	8.3	211T3*
9	57	8.3	211T1*
14	70	13.3	224T1†
10 to 15	50-70	8 to 30	231T1*††
10 to 16	50-70	8 to 30	232T1††
18	70	13.3	230T1†
18	90	12	235T1†
33	57	8	211T2†

*Isolated-secondary type

†Autotransformer type

††Universal type

††For projection kinescopes

HORIZONTAL-OUTPUT TRANSFORMER

For Camera Tube Types	RCA Type
6198, 6326	233T1

HORIZONTAL LINEARITY CONTROLS

Inductance Range		RCA Type
Minimum mh	Maximum mh	
0.55	2.3	201R5
1.3	4.1	209R1
1.5	8.3	213R1
5.5	20	201R3

WIDTH CONTROLS

Inductance Range		RCA Type
Minimum mh	Maximum mh	
0.05	0.245	201R1
0.08	0.24	201R2
0.17	0.61	201R4
0.47	1.7	206R1
0.5	1.7	208R1
1.65	9.2	211R1
1.75	10.5	214R1*
2.9	16	212R1
3.9	22	215R1

*Has tapped secondary winding for AGC/AFC operation.

ION-TRAP MAGNETS

Description	RCA Type
Double-pole, field-coil type. Dc current rating, 200 ma.	203D1
"Universal" Double/Single pole permanent-magnet type. Employs 3 ring-shaped magnets for use in double-pole applications. Can be used in single-pole applications by removing the small ring-shaped magnet. Field strength; large magnet, 55 gauss; small magnet, 15 gauss.	203D3

HORIZONTAL-OSCILLATOR AND SYNC-STABILIZER COILS

Description	RCA Type
6-terminal phase discriminator for 630-type receivers.	208T8
3-terminal center-tapped oscillator coil for synco-guide circuits.	203R1
4-terminal oscillator coil for synco-guide circuits.	205R1

VERTICAL-OUTPUT TRANSFORMERS

Turns Ratio Primary to Secondary	DC Resistance Primary ohms	RCA Type
3:1	700	234T1
10:1	521	204T9
10:1	590	204T2
11.4:1	1200	222T1
18:1	1600	226T1*

*Auto-transformer.

VERTICAL-BLOCKING-OSCILLATOR TRANSFORMERS

Turns Ratio Primary to Secondary	DC Resistance		RCA Type
	Primary ohms	Secondary ohms	
1:4.2	244	1310	208T2
1:4.2	244	1310	208T9
1:4.2	208	1060	209T1

HORIZONTAL-BLOCKING-OSCILLATOR TRANSFORMERS

Turns Ratio Primary to Secondary	DC Resistance		RCA Type
	Primary ohms	Secondary ohms	
1:2	3.5	8.5	208T1
1:2	3.5	8.5	208T3

POWER TRANSFORMERS (117 VOLTS, 60 CPS)

SECONDARY WINDINGS

Primary Winding Current amps	Plate Winding		Filament No. 1		Filament No. 2		Filament No. 3		RCA Type
	Full-Load Voltage volts	Max. DC Current amps	Voltage volts	Current amps	Voltage volts	Current amps	Voltage volts	Current amps	
2.20	770/395	0.230	5	3	6.3	9.0	5.0	2.0	201T7
2.18	720/360	0.250	5	3	6.3	8.0	5.0	2.0	201T8*
2.48	730/365	0.260	5	6	6.3	8.85	5.0	2.0	201T9
2.48	730/365	0.260	5	6	6.3	8.85	6.3	1.2	201T10

*Type 201T8 has an additional filament winding: 6.3 volt @ 0.6 ampere.

FOCUSING AND ALIGNMENT COILS

DC Resistance ohms	DC Current ma	For Kinescopes or Camera Tubes		RCA Type
		Typical Types		
140	40	6198, 6326		218D1*
150	30	5820, 5826		204D75*
247	120	108P4-A, 12LP4-A		202D1
385	60	6198		217D1
2000	75	5820, 5826		202D75

*Alignment coils

RCA SPEAKERS

- Alnico V magnets used for all PM types.
- Rugged mechanical construction with welded housing assembly.
- Finest quality moisture-resistant cone and voice-coil suspension assures high efficiency and dependability.
- Dust-sealed construction.
- RETMA mounting standards are followed.
- Electroplated pot and frame to provide ample resistance to rust and corrosion.

PERMANENT-MAGNET TYPES

Size inches	Voice-Coil Impedance ohms	Alnico V Magnet Weight ounces	Power Rating watts	RCA Type
2 ³ / ₄	12.	1.0	0.250	222S1
2 x 3	12.	1.0	0.125	214S1
3	3.2	1.0	2	216S1
3	3.2	1.47	2	231S1
4	3.2	0.68	3	223S1
4	3.2	1.0	3	304S2
4	3.2	1.47	3	404S2
4 x 6	3.2	0.68	3	246S2
4 x 6	3.2	1.0	3	227S1
4 x 6	3.2	1.47	3	446S2
5	3.2	0.68	3	205S2
5	3.2	1.0	3	228S1
5	3.2	1.47	3	405S2
5 ³ / ₄	3.2	1.0	4	217S1
5 x 7	3.2	1.47	6	257S1
5 x 7	3.2	2.15	6	233S1
5 x 7	3.2	3.16	7	232S1
6 ¹ / ₂	3.2	1.0	4	229S1
6 ¹ / ₂	3.2	1.47	5	224S1
6 ¹ / ₂	3.2	3.16	6	230S1
6 x 9	3.2	2.15	8	238S1
6 x 9	3.2	2.33	8	235S1
8	3.2	2.15	8	208S2
8	6-8	2.15	8	208S4

RCA SPEAKERS

PERMANENT-MAGNET TYPES (cont'd)

Size inches	Voice-Coil Impedance ohms	Alnico V Magnet Weight ounces	Power Rating watts	RCA Type
8	3.2	3.16	8	225S1
8	3.2	6.8	9	234S1
10	3.2	2.15	7	236S1
10	3.2	3.16	8	237S1
10	6-8	6.8	10	215S1
12	3.2	2.15	12	112S1
12	3.2	2.9	12	226S1
12	3.2	6.8	12	412S6
12	6-8	6.8	12	412S7

FIELD-COIL TYPES

Size inches	Voice-Coil Impedance ohms	FIELD-COIL		Power Rating watts	RCA Type
		DC Resistance, ohms	Current ma		
4 x 6	3.2	450	65	3	746S1
5	3.2	450	65	3	705S1
6 x 9	3.2	6	1000	8	869S1
12	3.2	1000	70	12	712S2

HIGH FIDELITY SPEAKER

Size inches	Frequency Response cps	Resonant Frequency cps	Voice-Coil Impedance ohms
12	40 to 16000	55 to 65	8
	Alnico V Magnet Weight ounces	Power Rating watts	RCA Type
	14	8	502S1

RCA SELENIUM RECTIFIERS

RCA Selenium Rectifiers are designed for general replacement use in TV, radio receivers, and phonographs. Advanced design, select raw materials, and superior workmanship make RCA Selenium Rectifiers a dependable line for virtually all service jobs.

- Smaller size . . . for any given current, they are smaller than other types.
- Quicker installation . . . integral mounting stud.
- Wide-open design . . . insures maximum heat dissipation, cooler operation . . . no center "hot spots."
- Rigid construction . . . for rugged service.

Max. Output ma	Max. Input volts	RCA Type	Min. Series Resistance ohms
65	130	205G1	33
75	130	200G1	22
100	130	206G1	22
150	130	201G1	15
200	130	207G1	5
250	130	208G1	5
300	130	202G1	5
350	130	209G1	5
400	130	203G1	5
500	130	204G1	5
400*	130	210G1	5
500*	130	211G1	5

*Special thin types for use where available space will not permit use of type 203G1 or 204G1.

Junior VoltOhmyst*, RCA WV-77A



The RCA Junior VoltOhmyst embodies all the features of its famous predecessor plus many new extras. Using the reliable Volt-Ohmyst bridge circuit, a sensitive 200-microampere meter movement, and 1% carbon-film multiplier resistors, the all-electronic WV-77A incorporates features found only in more expensive instruments. As a DC Voltmeter, it measures from 0.05 volt to 1200 volts in five ranges . . . even

in presence of ac. Less than 2- μ uf input capacitance with 11-megohm input makes the WV-77A invaluable for dc measurements in AVC, oscillator, and other high-impedance circuits. As an AC Voltmeter, the WV-77A measures from 100 millivolts to 1200 volts (rms) in five ranges. High ac-input impedance of vacuum-tube diode signal rectifier permits use in many varied rf applications. Frequency range flat within 1 db from 30 cps to 3 Mc, depending on source impedance and voltage range setting 50 kc to 250 Mc when used with WG-264 probe. As a wide-range Ohmmeter, the WV-77A measures resistance from 0.2 ohm to 1-billion ohms in five ranges. Danger of burnout of low-current devices such as battery-tube filaments is minimized by use of 1.5-volt battery. Meter is electronically protected against burnout on all functions.

Plus These New Extras

- Zero-centering facilities for discriminator alignment.
- DC polarity reversing switch eliminates need for test-lead switching.
- Ohms probe always positive for quick check of electrolytic capacitors.
- Degenerative bridge circuit provides freedom from line voltage changes.
- Completely shielded metal case for stability in rf fields and extra protection.

*Registered Trademark, U.S. Patent Office