

*Practical*

# Wireless

NOVEMBER 1988 £1.30

ISSN 0141-0857

*The Radio Magazine*

**REVIEWED... Yaesu FT-747GX HF transceiver**



**PW QRP CONTEST RESULTS**

**NEW SERIES... yesterday's world of technology**

**BUILD... a practical antenna electrometer**

"They said I couldn't work DX with just 100 watts. Especially with a radio that has less than 1000 switches on the front panel.

But the truth is, I'm working lots of DX, more than some of these blockbuster types, thanks to my Yaesu FT-747GX.

You see, my no-nonsense FT-747GX was designed with me in mind, so I can hop around the band fast to nail those DX stations. While the other hams are warming up their amplifiers, I'm working the new country!

My FT-747GX has a super receiver, with a directly-driven mixer for great overload protection. And, Yaesu included the CW filter in the purchase price

(I used the money I saved on postage for the QSL cards!).

And my FT-747GX is loaded with other features. The receiver works from 100kHz straight through 30MHz, and it's a fantastic shortwave broadcast receiver. I can use all twenty memories for that alone! Plus it's got dual VFOs. A noise blanker. Split frequency operation for the pile-ups. And scanning up the band helps me check out openings as they happen.

I just put in the optional crystal oven, and next month I'm going to pick up the FM board.

And with the money I saved when I bought my FT-747GX, I got a second ten-metre antenna for satellite work on the high end of the band. I use my personal

computer to tell me what satellites are going by, and the computer even sets the frequencies on the radio for me.

Now my friends are getting FT-747GX rigs, too. I knew they'd figure out my secret weapon sooner or later. But now I'm setting the pace!

Thanks, Yaesu. You've made a rig that makes sense, at a price I can afford."

#### **South Midlands Communications Ltd**

S.M. House, School Close,  
Chandlers Ford Industrial Estate,  
Eastleigh, Hants SO5 3BY

Tel: (0703) 255111

**UK Sole Distributor**

# **YAESU**

## **"They laughed when they saw my radio. Then they saw my logbook."**



# Practical Wireless

The Radio Magazine

NOVEMBER 1988 (ON SALE 13 OCTOBER 1988)

VOL. 64 NO. 11 ISSUE 980

## NEXT MONTH

Special 8-page feature  
“In the Know”  
Helping the radio hobbyist to find essential information and bits

Build the PW “Marlborough” LF/MF to HF Converter

Heinrich Hertz;  
Did he discover radio?

plus  
All the usual features

Don’t miss it—place your order with your newsagent now!

On sale  
November 10

Contents subject to last-minute revision.

### Editor

Geoff Arnold T.Eng FSERT G3GSR

### Assistant Editor

Dick Ganderton C.Eng MIERE G8VFH

### Art Editor

Steve Hunt

### Technical Features Editor

Elaine Richards G4LFM

### Technical Projects Sub-Editor

Richard Ayley G6AKG

### Editorial Assistant

Sharon George

- 22 Yesterday's World of Technology—1  
F. C. Judd G2BCX
- 26 Haven't You Got An Ohm To Go To?  
Phil Williams G3YPQ
- 26 Errors and Updates  
A Constructor's Shack Test Gear, Oct 1988
- 28 Practical Antenna Electrometer  
Anthony Hopwood
- 32 PW QRP Contest Results  
Neill Taylor G4HLX
- 36 The EEC EMC Directive  
Nick Foot
- 38 PW Review  
Yaesu FT-747GX HF Transceiver  
Mike Richards G4WNC
- 46 Practically Yours  
Glen Ross G8MWR
- 53 Computing Corner  
Paul Newman
- 54 Kitchen Konstruktion No. 8  
Richard Q. Marris G2BZQ

We are sorry that, due to pressure on editorial space and the effects of the postal dispute, Understanding Circuit Diagrams—9, Crops & Coils—3, and Chas E. Miller's dissertation on the DST100 receiver have had to be held over

### Regular Features

75 Advert Index	17 Newsdesk	45 Short Wave Mag
45 Binders	57 On the Air	25 Subscriptions
48 Book Service	26 PCB Service	50 Swap Shop
14 Comment	16 PW Services	14 Write On

### Editorial and Advertisement Offices:

Practical Wireless

Enefco House

The Quay

Poole, Dorset BH15 1PP

• Poole (0202) 678558

(Out-of-hours service by  
answering machine)

FAX Poole (0202) 666244

Prestel 202671191

### Advertisement Manager

Roger Hall G4TNT

PO Box 948

London SW6 2DS

• 01-731 6222

Cellphone 0860 511382

### Advert Copy and Make-up

• Poole (0202) 678558

**COPYRIGHT** © PW Publishing Limited 1988. Copyright in all drawings, photographs, and articles published in *Practical Wireless* is fully protected and reproduction or imitation in whole or in part is expressly forbidden. All reasonable precautions are taken by *Practical Wireless* to ensure that the advice and data given to our readers are reliable. We cannot however guarantee it and we cannot accept legal responsibility for it. Prices are those current as we go to press.

## STANDARD C500 DUAL BAND HANDIE



Still continuing to be our best dual-band handheld, the STANDARD C500 offers facilities envied even by our Commercial users. 2m and 70cms, full duplex operation with receive coverage on 138 - 169.995 MHz and 420 - 469MHz.

**SPECIAL LEICESTER EXHIBITION PRICE: £349**



## YAESU FT747GX “ECONOMY” HF TRANSCEIVER

An HF transceiver with built-in general coverage receive. All mode, including FM as an option, for less than the price of a 2m multimode!

Offered without am or cw filters at a super discounted price of £579

## ICOM IC32E DUAL BAND HANDIE



Direct competition to the STANDARD C500, the ICOM IC32E offers excellent facilities utilising all existing ICOM accessories. Ideal for the IC2E/O2E owner. Similar specification to the C500.

**SPECIAL LEICESTER EXHIBITION PRICE: £369**

## YAESU FT767GX HF + 2m + 6m + 70cms

Despite being YAESU's most expensive transceiver for HF operation, it continues to outsell all other HF equipment marketed by A.R.E. All band, all mode, built-in automatic tuning unit, power supply, general coverage receiver, digital power/SWR meter, full 100w output, optional 2m/6m/70cms modules, which just plug in.



**SPECIAL LEICESTER EXHIBITION PRICE: £1,369**  
including MH1BB scanning mic.

Also available with one or all VHF modules fitted at a discounted price.

ARE  
Tel: 01-997 4476

## KENWOOD TS790G TRIPLE BAND MULTIMODE BASE STATION

At last KENWOOD have updated the long-standing TS780S. The latest addition to the KENWOOD product range, the TS790G offers an excellent specification over the 2m/70cms/23cms amateur band. The new TS790G is simple in operation, but offers excellent performance for the VHF user. Operating on 12 volts DC, it is available with the matching PS31 power supply and SP31 speaker. Viewing for the first time can be made at the LEICESTER EXHIBITION.

SPECIAL LEICESTER EXHIBITION PRICE:  
WAIT AND SEE!!



## KENWOOD TS680S/140S HF TRANSCEIVERS

Available with or without 6 metres, the TS680/40 is an ideal upgrade from your dusty FT101ZD!

SPECIAL LEICESTER EXHIBITION PRICE: TS680S £879  
- TS140S £799



## KENWOOD TS440S HF TRANSCEIVER

Quickly becoming a major seller in the A.R.E. product range, the TS440S offers 100w output between top band and 10m. FM is fitted as standard. Auto tuning unit is optional extra.




SPECIAL LEICESTER EXHIBITION PRICE:  
£1,029 or with antenna tuning unit £1,189

**A MESSAGE FROM THE GUV'NOR**

"We are often referred to by the 'official' UK Distributors as 'Grey Importers'. Perhaps a change of colour would be appropriate - may I suggest GOLD - because our massive savings in purchase price, which we pass on to you, puts GOLD back into your pockets. We are effectively cutting out the middleman by importing direct from our agents in Japan, (who are usually found NIPPING AROUND TOKYO IN HONDAS, RATHER THAN SWANNING AROUND IN AEROPLANES, MERCEDES OR ROLLS ROYCES). Both Brenda and myself spend the majority of our time contacting agents throughout the world securing supplies of Japanese

## UNIDEN/BEARCAT BC200XLT SCANNER

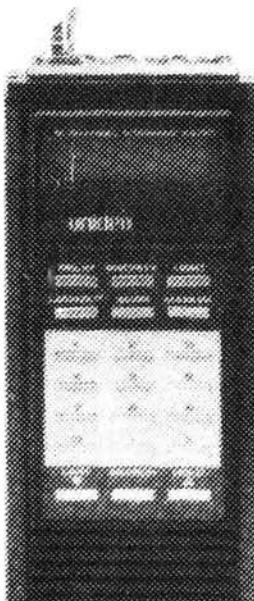

A purpose built handheld scanner, the new BEARCAT BC200XLT offers frequency coverage and specification previously unavailable. Frequency range 66 - 88MHz; 118 - 174MHz; 406 - 512MHz; 806 - 956MHz (Cellular Band).

200 fully programmable channels, auto am/fm selecting makes the BEARCAT 200 an instant success.

**SPECIAL LEICESTER EXHIBITION PRICE:** £219 including nicad pack, mains charger & free VHF/UHF Frequency Guide.

## JRC JST135 HF TRANSCEIVER

The latest offering from the Japan Radio Co., the JST135 is available for the radio amateur who appreciates quality engineering. Imported direct, bypassing any European distributor. A.R.E. COMMUNICATIONS continue to offer this excellent

transceiver at an unbeatable price. Visit our stand at the LEICESTER SHOW for details.



Opening hours Monday - Friday 9.30-5.30. Saturday by appointment.

products, including famous brand names such as YAESU and KENWOOD, at far better prices than those offered to you by the European distribution networks.

Our continued policy of direct importing will always guarantee you better prices. You may also have noticed that our product range is increasing - this is largely due to the tremendous support we get from our customers. Remember, the better the purchase, the more we can purchase and the better prices will be. Come along to our stand at the LEICESTER EXHIBITION where myself, Brenda, Martin and Brian will give you a warm welcome - and unbelievable discounts."

73 Bernie G4AOG

A.R.E. Communications Limited, 6 Royal Parade, Hanger Lane, Ealing, London W5A 1ET, England  
Fax: 01-991 2565


Tel: 01-997 4476



# ICOM

## NEW! IC-228E 2 Meter FM Transceiver

Actual size

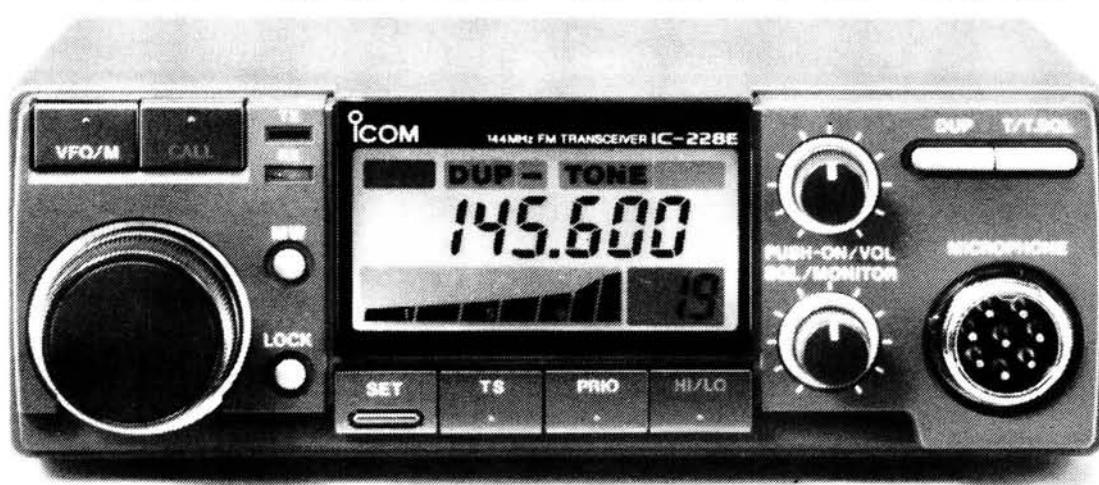

### Features:

- Multicolour Liquid Crystal Display.
- 25 Watt output.
- 20 Memory channels.

Take a close look at this easy to use and compact VHF Mobile Transceiver. It's unique orange, red and green LCD highlights the numbers and letters for easy viewing. With a 25 watt output from a custom designed power module and a extra large heatsink, this transceiver does not get too hot under your dashboard.

Each of the 20 memory channels can store frequency, offset and direction, in fact all the information to work simplex or a repeater. The memory scan function will scan the memory channels and with the skip function

- Scanning.
- Call and priority function.
- Compact size.
- HM15 microphone supplied.

miss those you choose. The program scan will scan all frequencies between two programmable limits. The call channel ensures that your favourite frequency is within easy reach, and with the priority watch the call channel or memory channels can be monitored every five seconds.

This transceiver provides you with so many features, its small compact size and simple front panel design make it a superb mobile transceiver. See the IC-228E or the IC-228H 45 watt high power version at your local ICOM dealer.


**icom (UK) Ltd.**

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

Count on us!

# DUAL BAND

## NEW! IC-3210E Dual Band FM Mobile

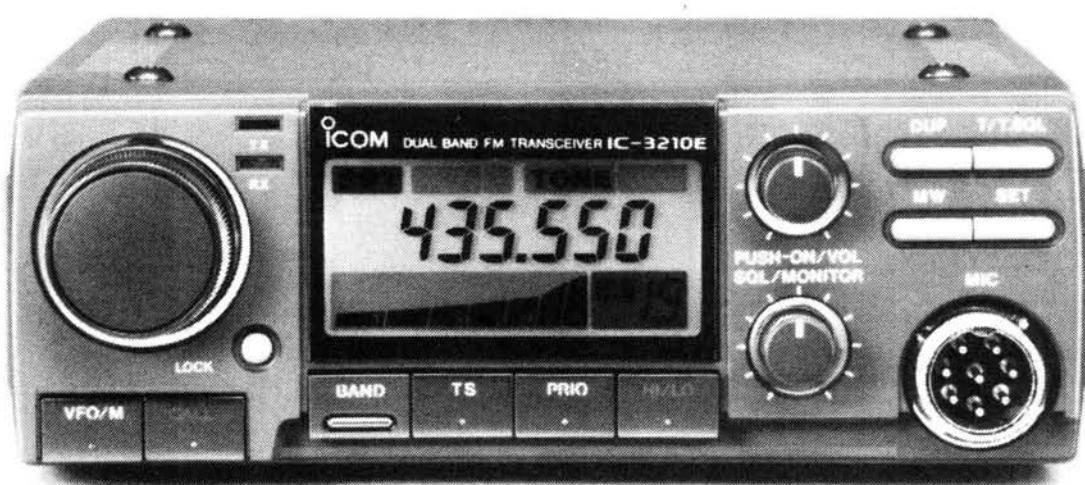

If you are newly licensed or just undecided about which band to operate first, then the new ICOM IC-3210 is just the answer. This dual band FM transceiver is ideally suited for the mobile operator. Transmit on one frequency and receive on the other and you're operating full duplex. It's just like talking on the telephone.

The simple and well laid-out front panel ensures quick and easy operation of all its many functions. A great convenience when driving. Optional accessories available are the UT40 tone squelch board, HS15 + SB mobile microphone and switch box, SP8 external speaker and PS45 AC power supply.


### Features:

- Full crossband duplex.
- 20 double-spaced memory channels.
- Built-in duplexer.
- 2 call channels.
- 4 priority watch functions.
- Programmed, memory and selected band memory scan.
- Variable LCD backlight intensity.
- Tone squelch and pocket beep functions (optional).
- 25 watts output.

**Helpline:** Telephone us free-of-charge on 0800 521145, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

**Datapost:** Despatch on same day whenever possible.

**Access & Barclaycard:** Telephone orders taken by our mail order dept, instant credit & interest-free H.P.



**SMC**

The Communicators

**South Midlands C**SCHOOL CLOSE, CHANDLERS FORD IND. EST., EAST  
**Save up to 36·9%**APR 36·3% APR 1  
Lloyds Bowmaker 36·1% SHEP**FREE FINANCE — BUY NOW SAVE****NEW DUAL-BANDER**

**The Supreme Performer**

**FT4700RH £675 inc VAT**

"CONFUSED BY THE NEVER ENDING STREAM OF TRANSCEIVERS APPEARING ON THE MARKET? IF SO THE YAESU FT747GX COULD WELL BE A SIGHT FOR SORE EYES!"  
P.W. NOV 88



**FT747GX**

- ★ 160-10M HF TRANSCEIVERS
- ★ GENERAL COVERAGE RECEIVER
- ★ ALL MODE (FM OPTIONAL).
- ★ 0-100W OUTPUT (25W AM.CARR)
- ★ CW NARROW (500HZ) STANDARD
- ★ LARGE CLEAR LCD DISPLAY
- ★ EASE OF OPERATION.

"Well done YAESU!" P.W.

**COMING SOON**

The FT4700RH is the second Dual Band FM Mobile to come from the Yaesu stable. Combining high performance with excellent reliability and ease of operation. The transceiver can be operated either mobile or fixed base (with the optional FP700 PSU) and the power output of 50w on 2m and 40w on 70cms is enough for all situations.

Full duplex crossband operation is available with a whole new look and features. A trunk mounting kit, the YSK4700, is optional, enabling dashboard mounting of the front panel controller and remote mounting of the main unit.

The FT4700RH has a dual receive facility provided with independent squelch controls and mixing balance so you can listen for calls on one band while working the other.

All the latest scanning functions are included as well as 10 memories on each band.

**Serious about VHF/UHF?**

- ★ Up to four band capability
- ★ LSB/USB, CW & FM
- ★ Full Duplex crossband operation
- ★ Memory storage of up to 230 frequencies
- ★ Keypad frequency entry
- ★ Fourteen VFO's
- ★ Global call channel
- ★ Programmable channel steps
- ★ Electronic keyer option
- ★ Remote preamplifier switching
- ★ TXCO high stability reference oscillator

"Overall I think the FT736R is a well organised Rig which is a pleasure to use"  
P.W.

**Best Buy from S.M.C.**

**Then the FT736R is for YOU!**

LEEDS  
SMC (Northern)  
Nowell Lane  
Industrial Estate  
Leeds LS9 6JE  
Leeds (0532) 350606  
9-5.30 Mon-Sat

CHESTERFIELD  
SMC (Midlands)  
102 High Street  
New Whittington,  
Chesterfield  
Chest. (0246) 453340  
9.30-5.30 Tues-Sat

BUCKLEY  
SMC (T.M.P.)  
Unit 27, Pinfold Lane  
Buckley, Clwyd  
Buckley (0244) 549563  
10-5 Tues, Weds, Fri  
10-4 Sat

JERSEY  
SMC (Jersey)  
1 Belmont Gardens  
St. Helier, Jersey  
Jersey (0534) 77067  
9-5 pm Mon-Sat  
Closed Wed

N. IRELAND  
SMC N. Ireland  
10 Ward Avenue  
Bangor  
County Down  
0247 271875

BIRMINGHAM  
SMC (Birmingham)  
504 Alum Rock Road  
Alum Rock  
Birmingham B8 3HX  
(021-327) 1497-6313  
9.00-5.00 Tues-Fri  
9.00-4.00 Sat

AXMINSTER  
Reg Ward & Co Ltd  
1 Western Parade  
West Street,  
Axminster  
Devon EX13 5NY  
Axminster (0297) 34918  
9-5.30 Tues-Sat

Southampton Showroom open 9.00-5.00 Monday to Friday, 9.00-1.00 Saturday. Service Dept open Mon-Fri 9.00-5.00

AGENTS: JOHN DOYLE, TRANSWORLD COMMS, NEATH (0639) 52374 DAY (0639) 2942 EVE

DAVID STENNING, G4JA, LOUTH 0507 604967, (024024) 4378 EVE.




# Communications Ltd. YAESU

EIGH, HANTS. SO5 3BY TEL: 0703 255111 FAX: 0703 263507 TLX: 477351

lombard 27.3% APR Barclaycard  
HERD 25.3% APR Access

**MONEY — 0% INTEREST**

SUBJECT  
TO  
STATUS

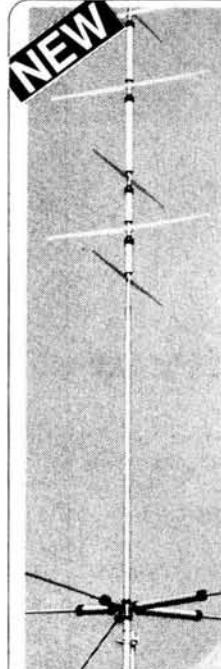

## from COMET & HOKUSHIN

SMC are proud to present 1 new mobile and three new base station antennas incorporating the very latest in aerial technology to give outstanding durability whilst maintaining excellent performance characteristics.

CHA5	WX1	CA2X4 MAX	CA2X4 KG
HF Vertical	VHF/UHF Base	VHF/UHF Base	VHF/UHF Mobile
80-10m 5 band	144/432 MHz	144/432 MHz	144/432 MHz
C/W Radials	4.5/7.2dB Gain	8.5/11.9dB Gain	6.0/8.4dB
200W Pep	200W Max	200W Max	120W Max
£210.00	£49.95	£99.95	£39.95

Also still available the two best selling amateur antennas, the ubiquitous 78F 2m 7/8 wave £21.15 and the GP144W 2m base £42.00

### MOBILE ANTENNAS

20W	2m 1/4 wave	£3.15
2NE	2m 5/8 wave fold over	£13.25
2SE	2m 5/8 wave fixed	£13.25
2VF	2m 1/2 wave fold over	£16.13
78B	2m 7/8 wave ball mount	£15.00
88F	2m 8/8 wave	£24.10
258	70cms 2 x 5/8 fold over	£29.37
268E	70cms	£32.80
358	70cms 3 x 5/8 fold over	£33.73

### DUAL BAND MOBILE ANTENNAS

70N2M	2m/70cms fold over	£24.95
727VM	2m/70cms fold over	£30.88
70N2DX	2m/70cms fold over	£37.75

### BASE ANTENNAS

ABC23	2m 3 x 5/8	£63.97
GP23	2m 3 x 5/8	£45.00
GPV144DX	2m 2 x 5/8 S/Steel	£53.13
GPV5S	2m 2 x 5/8 H/Duty	£45.50
GP432X	70cms 3 x 5/8	£47.50
GP714	70cms	£88.20
358FG	70cms 3 x 5/8 G/F	£57.75
HS965V	60-905MHz	£57.75

### DISCOS FROM SMC

DSC770	70-700MHz c/w Stub Mast	£55.74
D130	25-1300MHz c/w coax	£75.00

## MORSE KEYS



### MORSE KEYS

HK702	Straight Key	£42.95	A
HK703	Straight Key	£38.45	A
HK704	Straight Key	£26.35	A
HK705	Straight Key	£22.49	A
HK706	Straight Key	£21.80	A
HK707	Straight Key	£39.95	A
HK710	Straight Key	£39.95	A
HK808	Straight Key	£66.95	A
HK111	Key Mounting	£41.75	A
BK100	Mechanical Bug	£38.35	A
MK701	Single Lever Paddle	£38.35	A
MK702	Single Lever Paddle	£36.25	A
MK703	Squeeze Key	£34.50	A
MK705	Squeeze Key	£32.78	A
MK706	Squeeze Key	£30.48	A
HK802	de Luxe Brass Key	£109.00	B
HK803	de Luxe Brass Key	£104.50	B
HK804	de Luxe Brass Key	£101.99	B

### MORSE EQUIPMENT

KP100	Squeeze 230/13.8V	£109.25	B
Dewskay Std	Star Masterkey	£54.69	A
Dewskay M	Star Masterkey Memory	£94.99	A
D70	Morse Tutor (Datong)	£56.35	A
MMS1	Morse Tutor (MM)	£129.95	B

### MICROWAVE MODULES - RTTY EQUIPMENT

MM2001	RTTY to Video	£188.83	B
MM1001KB	Morse Keyboard	£135.00	B

### DATA TERMINALS

PK232/FAX	Multimode Data Terminal	£269.95	FOC
CW, RTTY, AMTOR, FAX	A = £1.75 B = £3.50		

### GUARANTEE

Importer warranty on Yaesu Muren products.  
Aably staffed and equipped Service Department.  
Daily contact with the Yaesu Muren factory.  
Tens of thousands of spares and test equipment.  
Twenty-five years of professional experience.

PRICES & AVAILABILITY SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Free Interlink delivery on major equipment.

Small items, Plugs, Sockets, etc. by post £1.75. Antennas, Cables, Wire & larger items, Lynx up to £5.00.  
Interlink delivery available, upon request, for items other than radios, from £7.30 depending on weight.  
Same day despatch whenever possible.

SONY at **SMC**

## SONY RECEIVERS



SMC are pleased to be able to offer the SONY range of Multiband Receivers. They feature all the latest technology allowing unequalled coverage of both broadcast and shortwave bands, yet remaining both compact and easy to use. All the models illustrated cover VHF Broadcast, SW broadcast and some SW or Air bands (only on certain models).

### ICF7600DS

Compact, synthesised portable receiver covering FM Broadcast, AM Broadcast, SW Broadcast (LW & MW) and SW bands with SSB. Large LCD display. Keypad entry and memory scanning.

### ICP7600D

Compact, handheld scanning receiver covering 150 KHz to 108 MHz and 115.15 to 223 MHz. SSB, FM(W & N), AM modes. 40 memories and PR080 8 way timing system.

### ICF7600DS

£159

### ICF200ID

£299

### ICFPRO80

£299

### AIR-7

Compact, handheld scanning receiver covering VHF broadcast airband and AM Broadcast (MW). 30 channel memory and keypad entry.

### AIR-7

£159

### ICP7600D

£299

### ICF200ID

£299

### ICFPRO80

£299

### AIR-7

£229

A full range of accessories is also available.  
Carriage free on all above Receivers (not accessories).

## ROTATORS



Superb engineering standards combined with pin sharp setting accuracy means new technology from the rotator company

- SMC

### "G-800SDX/G-1000SDX Shown"

### ANTENNA ROTATORS

AR200XL	Offset type Twist/Switch control	£38.50
G-250	Bell type, Twist/Switch control	£78.00
AR40	Bell type, Turn/Push control	£155.00
G-400RC	Bell type, 360 deg. meter	£169.00
CD45	Bell type, meter readout	£219.00
G-600RC	Bell type, 360 deg. meter	£219.00
HAM IV	Bell type meter readout	£327.00
T2X	Bell type, meter readout	£449.00
HDR300	Bell type, Digital readout	£699.00
G-800SDX	Bell type, 450 deg. var. spd	£325.00
G-1000SDX	Bell type, 450 deg. var. spd	£368.00
G-2000	Bell type Meter ± 90 deg.	£445.00
KR500	Elevation, Meter ± 90 deg.	£149.95
KR5400	Azimuth/Elev. Dual control	£279.00
KR5400A	Azimuth/Elev. Computer cont.	£339.00

### ROTATOR HARDWARE

9523	Support bearing Chan. Master	£19.95
9523/FU200	Support bearing FU200 etc	£21.95
9525	Rotary bearing Guy type	£19.95
KS050	Rotary bearing 1 5/8" mast	£19.95
GS065	Rotary bearing 2" mast	£29.95
GC-038	Lower mast clamp G-400/600	£16.95

### ROTARY CONTROL CABLE

RC5W	5 way for G-400RC etc. per/mtr	£0.48
RC6W	6 way for G-250/400 etc. per/mtr	£0.66
RC8W	8 way for CD45 etc per/mtr	£0.72

### Free carriage on all rotators.

Prices are inclusive of VAT.

Carriage on Rotator Hardware

Carriage on Rotator Cable

£2.50

£3.50

### FREE FINANCE . . .

On many regular priced items SMC offers.  
Free finance (on invoice balances over £120) 20% down and the balance over 6 months or 50% down and the balance over a year.

Details of eligible items available on request.

You pay no more than the RRP price!

### SONY AIR-7 HAND-HELD AM/FM 108-176MHz + LW/MW/FM UNBEATABLE VALUE

The best VHF monitor there is. That's a fact! 108-176MHz plus LW/MW/FM broadcast. Covers air, marine, PMR etc. LCD display, memories, scanning, lockout priority etc. Supplies are short but we are the UK's largest stockist, so check with us!



£227 FREE SECURICOR

PRICE DOWN

### SONY ICF2001D RECEIVER SUPER PORTABLE AM/SSB/CW + AIR BAND COVERAGE

Described as "the best portable on the market" by a recent reviewer, it covers 150kHz-300MHz AM/SSB CW plus AM VHF air band and FM broadcast. Memories scanning, etc. are all included. The SSB performance is superb and can match many base station receivers. 230-110V AC power supply included.



£299 FREE SECURICOR

PRICE DOWN


### OTHER SONY PRODUCTS

ICF7600DA Analogue SW receiver  
ICF-SW1S Micro short-wave receiver  
ICF-PRO80 SW/VHF receiver  
AN1 Active SW antenna  
AN3 Vertical for Air-7 receiver  
BP23 Ni-cad battery pack  
ACD4 Mains PSU/charger  
DCC127A 12v car PSU

£129.00  
£249.00  
£299.00  
£49.00  
£45.00  
£15.95  
£15.95  
£19.95

All our Sony stocks carry UK cards and do not have serial numbers etc. removed from boxes!

### GLOBAL AT1000 AERIAL TUNER




£69.00 POST FREE

The AT100 is a receiver aerial tuner designed to give you maximum performance from your receiver. Covering the frequency range 150kHz to 30MHz it matches all the modern receivers produced in recent years. Ideal for matching long wire, dipoles or balanced feeder.

### SONY ICF7600DS PORTABLE COMMUNICATIONS

Not a toy, but a serious communications receiver 150kHz-30MHz AM/SSB plus FM76-108MHz. Digital readout, memories, clock and provision for external antenna. Listen to the DX at work! Mains or battery.

New SW-1 in stock £249



£157 FREE SECURICOR

PRICE DOWN

### R537S AIR-BAND MONITOR 118-136MHz

This well known receiver is ideal for the serious air-band enthusiast, superb sensitivity and selectivity, this pocket size monitor is unrivaled in value for money. 2 fixed channels are possible and the squelch control ensures silent background. Complete with battery and whip.



£69.50 CARR FREE

### THIS MONTH'S OFFER A Complete HF Station



£759  
OFFER ENDS  
26 NOVEMBER

This month we are offering a complete HF station comprising FT747 and 30 amp AC PSU for a bargain price. With most rigs costing over £1,000 it's nice to offer something a bit more realistic in price! Features include 100 watts output on all bands. Rx from 100kHz to 30MHz. 20 memories, dual VFO's wide and narrow CW filters, digital display, LSB/USB/CW/AM with squelch plus FM option. We have found it to be excellent and can thoroughly recommend it. The matching power supply is generously rated and fitted with thermal fan and full protection.

### BOOKS SPECIALLY FOR YOU!

#### AIRBAND FREQUENCY GUIDE

(RTTY and FAX Guide now out  
— see bottom of page)

The new edition of this famous guide will be available at end of August. Now running to 100 pages, it is crammed with gen that is essential reading for the airband enthusiast. Lots of editorial and pictures plus new cross reference of frequencies in alphabetical and numerical order. Order your copy today.

Price £5.95 + £1 P&P

#### COMPLETE VHF/UHF FREQUENCY GUIDE 26-2250MHz

£5.95 + £1.00 p&p

#### UK LISTENERS CONFIDENTIAL FREQUENCY LIST 1.6-30MHz

£6.95 + £1.00 p&p

FIFTH EDITION



Completely revised and updated, this publication is one that should be on every enthusiast's bookshelf. The previous edition sold 6000 copies in 18 months. This latest issue is 25% larger and has been completely re-written with a new easy-to-read layout. No other publication offers you so much information for such low cost. It provides complete details of all the services in the UK that make use of the VHF/UHF spectrum with listings from 26 to 2250MHz without gaps, and additional listings to 56GHz. Each section begins with full details of the services that use each segment of the spectrum followed by details of individual services in frequency order. Users covered include the emergency services, marine, aeronautical, land mobile etc. Many of these services use duplex frequencies and full details of the splits are included for base and mobiles. Although many of the frequencies listed cannot be monitored without a licence, all listeners should find this book a mine of information. Tremendous value!

This famous listing is now in its fifth edition. Completely updated for 1988 and a lot thicker. Many additional frequencies have been added and of course some have been deleted where the service is known to no longer exist. Packed full of information on all that happens between 1.6 and 30MHz, you will find this fascinating reading. Covering all aspects of the shortwave service, here is just a selection of the listings included: AVIATION, BROADCAST, MARINE, EMBASSY, MILITARY, RTTY, FAX, PRESS, and much more. Not only frequencies and stations, but in many cases times of transmissions as well. This is not an American import, but a UK printed manual specially for UK listeners. If you are one of the few people that haven't purchased one of these yet, then you really don't know what you have been missing. If on the other hand you have our previous editions, we know that you will want to get the latest edition. Available end of March. Order your copy today.

### USE OUR FAST MAIL ORDER SERVICE - Second to None!

#### HF Transceivers

Kenwood TS940S

Kenwood TS711E

£898.00

Kenwood TS811E

Kenwood TS930S

Kenwood TH205E

£215.26

Kenwood TS440S

Kenwood TH215E

£252.00

Kenwood TS140S

Kenwood TH25E

£258.00

Yaesu FT757GX11

Yaesu FT290 MK11

£429.00

Yaesu FT767GX

Icom IC2E

£255.00

Yaesu FT747GX

Icom IC2E

£225.00

Icom IC735

Icom IC2E

£269.00

Icom IC751A

Icom IC2E

£359.00

#### 2M Transceivers

Kenwood TH21E

Icom IC2E

£1039.00

Kenwood TR751E

Icom IC2E

£556.00

#### 70cm Transceivers

Kenwood TH41E

Icom IC2E

£239.00

Kenwood TH41E

Icom IC2E

£218.00

Kenwood TH41E

Icom IC2E

£299.00

Kenwood TH41E

Icom IC2E

£299.00

#### Station Accessories

Adonis AM 303G Mic

Kenwood TS211E

£998.00

Adonis AM 503G Mic

Kenwood TH405E

£273.00

Adonis AM 805G Mic

Kenwood TH415E

£298.00

Adonis FX8 Dash mic

Icom IC4E

£285.00

Sagant superord 2m

Adonis FX8 Dash mic

£998.00

Sagant stubby 2m ant.

Sagant superord 2m

£273.00

P300 30amp PSU

Sagant superord 2m

£298.00

Revox MS1 Monitor

Sagant superord 2m

£129.00

Airband Mag antenna

Sagant superord 2m

£194.00

HP4A TVI Braid Breaker

Sagant superord 2m

£219.95

HK708 Morse key

Sagant superord 2m

£16.95

G5RV Ant. complete

Sagant superord 2m

New Diamond VSWR Meters:

SX200 1.8-200MHz

Sagant superord 2m

£65.00

SX600 1.8-525MHz

Sagant superord 2m

£179.00

Carr. Free

Sagant superord 2m

£119.00

Under £100 add £2.50 for larger parcels &

Sagant superord 2m

£1.00 for small packages.

POCKET GUIDE TO FAX

Sagant superord 2m

£2.95 + 90p Available now.

# ALINCO SAVES YOU MONEY & SERVES YOU WELL

- ★ 144-146MHz (Rx. option 140-170MHz)
- ★ 25 watts output. ("HE" model 45 watts)
- ★ 21 memories & 2 "call" channels.
- ★ Programmable Scanning & Priority channel
- ★ 12.5kHz & 25kHz steps.
- ★ Includes microphone & mobile mount.
- ★ Bright LCD display
- ★ Reverse repeater etc.

Designed for optimum performance combined with small size, the ALINCO ALR-22E reaches new heights in both technical performance and value for money. We've managed to keep the price down to a level that cannot be matched by any other manufacturer although we believe that a small increase will shortly be made to the price. What better time therefore, than now to purchase one of these super rigs. You won't see prices like this again! Technically it's superb and inside it looks very much like some of its more expensive competitors! Measuring only 5.5" x 6.5" it will fit into most places and if you ask, we will extend the frequency range to cover 140-170MHz on receive. We could bore you with the specification but frankly it's just the same as all the others (apart from the price of course). We could tell you about all the various features it has, but again it's not much different from the competition. Let's be honest, apart from being some £100 cheaper than some of its competitors and having an extended receiver coverage, it really is like most other rigs. So if money is no object and you only want 144-146MHz coverage, you probably won't be interested in the ALR-22E. If on the other hand these things are important to you, why not send for the full colour brochure today.

- ★ 2M FM 144-146MHz
- ★ RX 137-170MHz!
- ★ 3 Watts output
- ★ Battery Saver
- ★ 10 memories
- ★ LCD Readout
- ★ S-meter
- ★ Tone Burst
- ★ Priority
- ★ 12.5kHz steps
- ★ 12v DC operation!

Another winner from ALINCO. A true handy transceiver with no extras to buy! Unlike its competitors, you get the nicad pack (500mA) AC charger, and provisions for direct 12v DC charge. Measuring 168 x 61 x 30mm it's a beauty! Optional accessories include speaker-mic, mobile bracket and high power packs. Get the facts today!



**2m FM Mobile ALR-22E**

A black and white photograph of the ALINCO ALR-22E mobile radio. It is a larger, rectangular unit with a digital display showing '185.00'. A price tag of £249 is shown in a starburst at the bottom right.

**FREE 24HR  
DELIVERY U.K.  
MAINLAND**



- ★ 2m/70cm. Full duplex operation.
- ★ 25 watts FM on both bands.
- ★ Single antenna socket output.
- ★ 21 memories & 2 "call channels".
- ★ Programmable scanning and priority.
- ★ 12.5KHz & 25KHz steps.
- ★ Includes all hardware & microphone.
- ★ Bright LCD readout.
- ★ Reverse repeater operation.
- ★ 12 months warranty parts & labour.

## OTHER ALINCO ITEMS

ALR22HE 50 watt .....	299.00
ALR72E 70cm mobile .....	299.00
MM1 mobile mounts .....	10.95
ALX2E 2m h'held.....	189.00
EBP3N Batt pack.....	28.95
EBP2N Batt pack.....	23.00
EDH10 DC to DC.....	16.95
ESC5 Case and clip .....	15.50
EDC2 Cigar charge cable.....	6.50
ELH230D11 30w Amp .....	75.00
ELH260D 50w Amp .....	119.00
DC1 DC leads for mobiles .....	5.95
DC2 DC lead for amps .....	4.50

## NEW DUAL BAND HANDHELD!

The new ALINCO DJ-500E will shortly be available covering 2m & 70cm with full duplex. Features include 10 memories on each band and programmable offsets. Receive frequency can be extended from 130-169 & 420-469MHz approx. Measuring 58 x 176 x 30 mm it is pretty compact. As usual all the standard accessories are supplied at the basic price. Watch for our super opening price!

## ALINCO DJ-500E 2M/70 cm

- ★ 2m/70cm Coverage
- ★ Full duplex
- ★ Extended Rx ranges
- ★ Programmable Memo
- ★ Scanning
- ★ Keyboard Entry
- ★ Compact size
- ★ No extras
- ★ Price? T.B.A.



RETAIL & MAIL ORDER:- 18-20, Main Road, Hockley, Essex SS5 4QS.

Tel: (0702) 206835, 204965

RETAIL ONLY:- 12, North Street, Hornchurch, Essex RM11 1QX.

Tel: (04024) 44765

Visa and Access by telephone. 24hr. Answerphone.

**WATERS  
&  
STANTON**

## SONY

SONY ICF 2001D  
76-108 MHz  
116-136 AIRBAND  
153kHz-29.995MHz  
FM - AM - SSB 32 MEMORIES  
INC PSU, CARRY STRAP  
& EARPHONE

£299



Sony ICF 7600DS FM/AM-SSB £159  
Sony SW1 150-30M C/S + FM Stereo-249 AM/FM  
Sony Pro 80-150KC-108MHz, 115MHz-224MHz, AM-FM-SSB £299  
Sony Anti Active Antenna  
Sony Accessories Available

SONY ICF 7600DS  
76-108MHz  
76-108MHz  
153kHz-29.995MHz  
Complete with case,  
mains power supply,  
earphone and  
frequency list.

£159



**NEW**

## KENWOOD

Kenwood RZ1 150kHz-950MHz £399  
Kenwood TS140S £800  
Kenwood R5000 £799  
New Bearcat UBC200XL £249  
Handheld 29-54MHz, 118-174MHz, 406-470MHz.  
806-956MHz inc NiCad Charger & Case.  
Bearcats in Stock

Black Jaguar, etc.

191 FRANCIS ROAD  
LEYTON · E10 6NQ · LONDON  
TELEX 8953609 LEXTON G  
PHONE 01-558 0854 01-556 1415  
FAX 01-558 1298

## DRESSLER ACTIVE ANTENNAS

ARA 900  
ACTIVE ANTENNA

**NEW**



50MHz to 1300MHz  
Gain 17dBi Typical  
TECHNICAL SPECIFICATIONS  
FOR ARA 900

Gain 17dBi Typical (14-17dB)  
Frequency Range 50-1300MHz  
Noise Figure 1dB at 50-180MHz  
1.5dB below 300MHz  
2.0dB below 350MHz  
2.7dB below 400MHz  
3.0dB below 500MHz  
3.8dB below 650MHz  
4.0dB below 1300MHz  
Intercept Point 3rd Order -18dBm at Input  
Post £3.00 or Securicor £7.00 extra

£139.00

ARA 30 ACTIVE ANTENNA  
50 kHz . . . 40 MHz WITH LIMITED  
PERFORMANCE UP TO 100MHz

Professional electronic circuitry with very wide dynamic range. Meets professional demands both in electronics and mechanical ruggedness. 1.2m long glass fibre rod. Circuit is built into waterproof 2.5 mm thick aluminum tube. Ideal for commercial and svl-receiving systems. £129. See Review in August 1985 Issue p.35 Both antennas come complete with 7 metres of cable, interface, power supply and brackets.

£129

OPEN MON - SAT 9AM - 5.30PM  
INTEREST FREE HP FACILITIES AVAILABLE  
ON MANY ITEMS PROMPT MAIL ORDER



Prices correct at time of going to press. Please phone for latest quote

## ICOM

ICOM R71  
General Coverage Receiver  
£825



FIRST CLASS SHORT WAVE RECEIVER. BUY THIS FOR £825 AND RECEIVE AN ARA 30 FREE. WORTH £129.

Also R7000 complete with ARA900 £969.

PHONE FOR BEST PRICE

ICOM IC32G ALL IN  
ICOM IC2GE STOCK  
ICOM IC228

+ All ICOM models available. +  
YAESU Accessories.

## YAESU

FRG 9600M £475  
FRG 8800 £575  
FRV 8800 £95  
FR767 + 2MTR £1550  
FT23 + FNB108 Charger £259

**BCD ELECTRONIC SERVICES**  
**/BCD** SOMERSET HOUSE, SOMERSET STREET,  
HULL HU3 3QH  
TEL: 0482 225437  
TELEX: 592592 KHMAL G (ATTN BCD146)

**J & M (Amateur Radio) G4GKU**

36, WESTGATE, ELLAND,  
W. YORKS HX5 0BB.  
PHONE: (0422) 78485  
Ask for John G4GKU



NOW A TRI-BAND MINI BEAM  
AT A SENSIBLE PRICE

£79.95

10m, 15m, 20m

(TRADE ENQUIRIES WELCOME)

Direct from the manufacturer at a money saving £69.95 complete. Or in kit form or as spare parts. Ask for a quote.

*Do you have a Camera/Hi-Fi/Radio/Binoculars or any technical item that you would like to part exchange for this antenna? If so just call and we will consider it.*

\*\*\*\*\*  
THE NATIONS MOST CENTRAL LOCATION  
M62 ■ M6 ■ M56  
COMMUNI - CONSTRUCTOR

## RADIO & ELECTRONICS FAIR

ELECTRONICS \* VINTAGE \* COMPONENTS

**"Great Sankey Forum"**  
Warrington, Cheshire

Sunday 23rd October 1988 10.30am - 4.00 pm

★ Amateur Bands Radio and Communications ★ Constructors Components and Kits ★ Vintage Radio and Hi-Fi ★ Technical Books and Magazines ★ Test Equipment and Instruments ★ Antennas - Masts - Towers ★ High-Tech Cable and Wire ★ Ministry Surplus and Disposals

### EQUIPMENT WANTED BOARD

Facilities for the Disabled  
Entrance £1.00 Children Free  
G.S.F. Barrowhall Lane, Gt Sankey, Warrington  
Nearest Motorway Exit M62 J7, then East along A57  
Stall & General Enquiries: Audrey and Bernard (A&B) 0772 435858

NOTE: NEXT EVENT Sunday 2nd July 1989

AR-2002?  
IC-R7000?  
FRG-9600?

SEND FOR DETAILS ABOUT A BRILLIANT NEW PRODUCT WHICH GREATLY INCREASES THE UTILITY & FUNCTIONS OF THESE RECEIVERS

AIRCRAFT PRODUCTS

P.O. BOX 78

BOURNEMOUTH

BH1 4SP

(0202) 666233

PLEASE STATE WHICH RX YOU HAVE

SEE US AT THE  
LEICESTER SHOW  
OCT. 28-29

SEE US AT THE  
LEICESTER SHOW  
OCT. 28-29

# AT LAST


## A HIGH PERFORMANCE TRANSVERTER THAT'S USER FRIENDLY

This sophisticated, but simple to use range of transverters has performance characteristics and features previously not available. The output stage uses well rated PA devices and advanced filtering techniques which guarantee a low harmonic output while the ALC circuits

ensure a remarkably clean output signal. The receive section uses highly regarded MOSFET's in an innovative active feedback configuration. Variable receive gain gives total control and allows the optimum signal to noise ratio to be achieved within the system.

### Features:


- ★ Independent RX Output
- ★ Internal & External ALC
- ★ LED Bar Graph
- ★ Push Button Switches
- ★ Overdrive Protection
- ★ Low Harmonic Output
- ★ Rugged PA Section

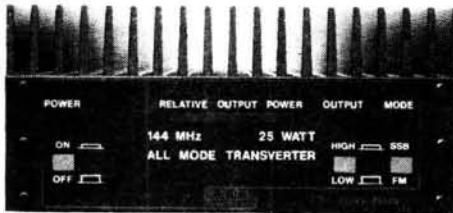

Accessory socket with:-  
8Vdc (ICOM TX/RX Drive Switching)  
R.F. Switching  
External PTT Output  
PTT Input  
+12V  
Ground

SPECIFICATIONS	TL50-28-25	TL50-144-25	TL70-28-25	TL70-144-25	TL144-28-25
Frequency Range	50-52MHz	28-30MHz 144-146MHz	70-72MHz	144-146MHz	28-30MHz
Input Frequency	28-30MHz	144-146MHz	28-30MHz 144-146MHz	28-30MHz	144-146MHz
*Output Power high	25W	5W	25W	25W	25W
low			5W		5W
Input power (adjustable)	100uW-500mW (-10+-27dBm)	1mW-1W 13.8Vdc @5A +/-15%	100uW-500mW (-10+-27dBm)	1mW-1W 13.8Vdc @5A +/-15%	100uW-500mW (-10+-27dBm)
Supply		RF Vox & "hard wired" PTT			13.8V @5A +/-15%
Switching		9-26dB Variable			
RX Gain		0 - -4Vdc			
ALC Range Input		0 - -12Vdc			
Output					

\*Fully adjustable from 1 to 25 Watts.

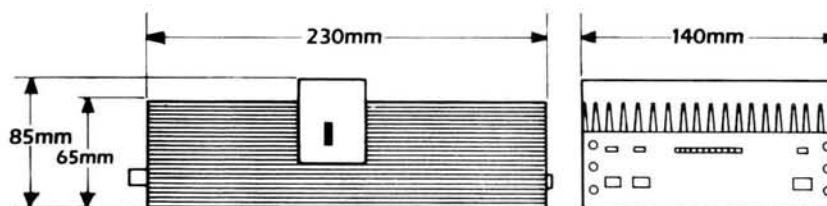

TL-50-28-25 £316.25  
TL50-144-25 £299.00

TL70-28-25 £316.25  
TL70-144-25 £299.00

TL144-28-25 £345.00

### HOW TO ORDER

By phone: using your Access or Visa/Barclaycard  
By mail: Cheque, Postal Order or Credit Card  
Or from your local BNOS Authorized Dealer  
Or see us at the Leicester Show

Post, Packaging and Insurance should be added to all orders  
3 Working day delivery service

Orders with a total value less than £50 add £2.50 to total  
Orders with a total value more than £50 add £5.00 to total  
Orders with a total value more than £250 add £7.50 to total

Next day delivery service.  
Orders any value add £15 to total.



**B.N.O.S.**  
ELECTRONICS

Mill Lane, Stebbing, Dunmow, Essex, CM6 3SL.  
Tel: 0371-86681      Tlx: 817763 BNOS G

E&OE

# GAREX

**THE SCANNER  
SPECIALISTS**

### JIL SX-400

THE PROFESSIONAL SCANNER



- Basic coverage 26-520MHz
- AM, NFM & WFM
- Expandable from 100kHz to 1.4GHz with SSB and CW
- Computer control options
- IF output terminals
- Specifications set by professionals

£649

### REVCO RS-3000

THE COMPACT SCANNER



- Size only 6" x 2" x 8"
- Covers: 26-32MHz, 60-90MHz, 118-180MHz, 380-512MHz
- AM & FM all bands
- Liquid crystal display
- 50 memories
- Scan, search, priority

£199

### JIL SX-200N

THE SUPERIOR SCANNER



- The choice of the professionals
- Proven reliability
- Covers: 26-88MHz, 108-180MHz, 380-514MHz
- AM & NFM on all bands
- Positive action keyboard
- 16 memories
- 12V dc & 240V ac

£325

## GAREX ELECTRONICS

MAIN DISTRIBUTOR OF REVCO PRODUCTS. PRICES INCLUDE UK P&P and 15% VAT. Ask for details of our interest free credit.

Extensive range of PYE radiotelephone spares — S.A.E. for list.

### AOR 2002

THE WIDE RANGE SCANNER



- Covers: 25-550MHz, 800MHz-1.3GHz
- AM & NFM & WFM on all bands
- Computer interface socket
- 20 memories
- Compact size
- 12V dc operation
- Up/down step control knob

£487

### AOR 800E

THE SMALLER HANDY-SCANNER



- Covers: 75-106MHz, 118-175MHz, 406-496MHz, 830-950MHz
- AM & NFM programmable on all bands
- Full scan & search functions are available
- 20 memories
- Measures only 2.5" x 5.5" x 2"
- Nicads, charger & BNC whip antenna included in the price

£199

### NEW IMPROVED REVCONe

The British made REVCONe already renowned throughout the world has now been improved with a new exclusive feature. The addition of a vertical element to a cone has been shown to improve the performance on a selected band.

Now the REVCONe offers YOU the choice of band

All new REVCONes supplied by us now incorporate a mounting stud for an optional vertical whip for the band of your choice. Whips may be chosen for any frequency from 27 to 950MHz from the standard REVCO range. Basic REVCONe - excellent value at £3.75

£3.75

£3.90 to £10.75

Add-on whips from £1.00

Remember this British product carries no overseas freight or import duty!

### BROADBAND PREAMPLIFIERS

REVCO PA301 long masthead model with special mains psu. DC 10W min. 13dB gain. £49.95



PA31 instrument or back of set version for 12V DC operation. BNC connectors (S0239 or N-type if preferred) £35.50

HARROW HOUSE, AKEMAN STREET, TRING HP23 6AA.

Phone Tring (04282) 8580 & Cheddington (0296) 668684. Callers by appointment only.

Ask for our secondhand scanner bargain list.

## ★ ★ ★ 25th ANNIVERSARY YEAR 1963-1988

## ★ ★ ★ 25th ANNIVERSARY YEAR 1963-1988

### COMMUNICATION CENTRE OF THE NORTH

The largest range of communications equipment available in the North. Full range of receivers, transceivers, antennas, power supplies, meters. Ali tubing – wall brackets – rotators – insulators.

#### ANTENNA RANGE

FULL RANGE OF KENWOOD EQUIPMENT AND ACCESSORIES STOCKED

#### BUTTERNUT

HF2V 40-80m vertical	£142.00
20M RTR 20m add on kit	£33.49
HF6VX 6 band vertical	£159.00
TBR160S 160m Add on kit	£53.99
HF4B Triband Mini Beam	£235.00

#### CUSHCRAFT

A3 3 element Tribander	£262.00
A4 4 element Tribander	£350.00
10-3CD 3 element 10m	£115.00
15-3CD 3 element 15m	£139.75
20-3CD 3 element 20m	£238.00
AP88 band 25ft vertical	£164.00
AV5 5 band 25ft vertical	£123.00
18 element 2m Boomer	£106.00
15 element 2m Boomer	£85.00

#### ANTENNA TUNERS

Kenwood AT230	£208.00
CAPCO SPC 3000	£225.00
CAPCO SPC 3000D	£225.00
MFJ 962B 1.5k Tuner	£241.00
MFJ 949C 300W Versatuner	£157.00
MFJ 941D watt Basic	£105.00
MFJ 1601 Random Wire Tuner	£42.00
Kenwood AT250 Automatic	£366.00

55RV full size £16.50, half size £14.50 Full range of Antenna – Accessories plus full range of VHF – UHF – HF mobile Antennas

Full range of RSGB and ARRL publications in stock.

Part Exchanges welcome. Second hand lists daily.

Send S.A.E. for details of any equipment.

HP terms. Access/Barclaycard facilities.

Open 6 days a week. 24 Hour Mail Order Service.

Goods normally despatched by return of post.

Phone 0942-676790.

### STEPHENS JAMES LTD.

47 WARRINGTON ROAD,  
LEIGH, LANCS. WN7 3EA.

### J. BIRKETT

RADIO COMPONENT SUPPLIERS

25 The Strait  
Lincoln, Tel. 20767  
(LN2 1JF)

Partners J.H.Birkett.  
J.L.Birkett.

DIE CAST BOXES 4½" x 3½" x 2½" inc 3 for £5.95.
DUAL GATE MOS FETS DM201 inc 80p, 2N3819 inc 20p, 10256 inc 20p, 1364 inc 6 for £1.
1MA METER Size approx 10cm x 5cm x two for £2.50.
50 CRIMPED 12 VOLT Terminals for 60p, 50 Gold Bonded Diodes inc 50p.
50 ASSORTED BC107-B-9 UNTESTED inc 75p, 50 var-cap diodes inc 60p.
100 DIODES 1N4001 inc 30p, 100 1N4002 inc 30p, 100 1N4003 inc 30p.
POSTAGE STAMP DIMMERS 1-500 inc 100p, 1000 inc 20p, 500 inc 25p.
200 ASSORTED MINIATURE POLYESTER CAPACITORS inc 1.00.
VHF UNI COAX AERIAL CHANGE OVER RELAY Same as R-3621 inc £10.00.
AIR SPACED VARIABLE CAPACITORS 10-10+20p inc £1.50, 125-125p inc £1.95, 100-200+1 inc £2.50, 200-220p inc £2.50, 208-176 inc £2.50, 125-180p inc £1.95, 100-200p inc £2.50, 250-250+20+20+20p inc £2.50.
AIR SPACED TRIMMERS 10p inc 50p, 220p inc 55p, 35p inc 60p, 56p inc 85p, 100p inc 95p, DIFFERENTIAL TYPE 10-10p inc 50p, 30-30p inc 55p.
EX-MILITARY COMMUNICATIONS RECEIVER Type R210 frequency 2 to 16MHz with AC Power Pack inc £79.80 car £8.
SSB CRYSTAL FILTERS 12.5MHz BW 2.4kHz upper and lower £1.95 pair.
MULLARD MODULE XIF TYPE LP1175 with details inc £1.95.
EB POWER PT9787 8W 30MHz inc £75. BLV270 inc £1.95.
BLX92A 6w 47MHz inc £6.49. BLV270 inc £1.95.
PLASTIC POWER TRANSISTORS 2sa699, 2sc1096 2sa1226 all 45p each.
SEI CRYSTAL FILTERS QCI276MB 10.7MHz BW 5KHz inc £2.95.
SEI CRYSTAL FILTERS QCI112A 10.7MHz channel spacing 25KHz inc £5.
MULLARD X BAND GUNN OSCILLATOR MODULE CL8630 inc £9.95.

We are looking for YAESU FT-7 receivers. Good price paid.

WOOD AND DOUGLAS KITS AND C.M.HOWES KITS AVAILABLE BY POST AND FOR CALLERS. ACCESS AND BARCLAY CARDS ACCEPTED. P.P. 60p UNDER £5.00. OVER FREE.

### VALVES

\*High Quality  
\*\*Very High Quality  
Prices correct as at 9/5/1988  
but may fluctuate 15% VAT incl

6AK5	1.40	1.80	0.90	1.99	1.60	1.90	1.10	P1200*	2.00	P1204	0.85
6AK7	7.00	7.50	0.65	1.91	1.60	1.96-97	1.50	P130	1.00	P1205	0.70
5Z900	12.75	1.50	4.00	1.92	2.15	1.68	0.65	P131	1.30	U1042	2.50
AB6	1.15	1.70	1.95	1.95	1.90	1.90	0.80	P132	0.70	U1081	0.75
ABP3	1.15	1.00	1.00	1.00	0.50	0.50	0.80	P133	0.90	U1082	1.60
ABP3	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P134	0.90	U1041	1.85
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P135	0.90	U1042	1.60
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P136	0.90	U1043	1.45
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P137	0.90	U1044	1.50
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P138	0.90	U1045	1.50
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P139	0.90	U1046	1.50
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P140	0.90	U1047	1.50
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P141	0.90	U1048	1.50
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P142	0.90	U1049	1.50
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P143	0.90	U1050	1.50
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P144	0.90	U1051	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P145	0.90	U1052	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P146	0.90	U1053	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P147	0.90	U1054	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P148	0.90	U1055	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P149	0.90	U1056	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P150	0.90	U1057	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P151	0.90	U1058	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P152	0.90	U1059	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P153	0.90	U1060	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P154	0.90	U1061	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P155	0.90	U1062	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P156	0.90	U1063	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P157	0.90	U1064	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P158	0.90	U1065	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P159	0.90	U1066	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P160	0.90	U1067	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P161	0.90	U1068	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P162	0.90	U1069	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P163	0.90	U1070	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P164	0.90	U1071	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P165	0.90	U1072	1.70
ABP4	1.15	1.00	1.00	1.00	0.75	0.75	0.80	P166	0.90	U1073	1.70
ABP4	1.15	1.00	1.00	1							


★★THE LEICESTER★★  
AMATEUR RADIO  
SHOW COMMITTEE



INVITE YOU TO THE

NATIONAL  
AMATEUR RADIO AND ELECTRONICS  
EXHIBITION

AT THE  
GRANBY HALLS  
LEICESTER

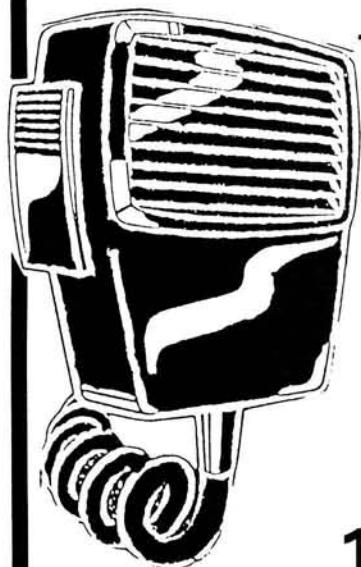

ON  
**FRIDAY &  
SATURDAY  
OCTOBER  
28th & 29th  
10.00 am – 6.00 pm**

*BRING & BUY  
STAR RAFFLE*

Admission—ADULTS £1  
*Concessions for  
Children and O.A.P.s*

Enquiries to Frank G4PDZ on 0533 553293

## STAR LETTER £10

### RSGB "YEAR"

Having read the RSGB draft proposals on the subject of "YEAR" (Youth into Electronics via Amateur Radio), I find that, interspersed between the padding and the clichés, there appear to be a few basic points the truth of which have been obvious to most amateurs for a long time. There are also several suggestions which I regard as ill-considered or impractical, or even downright dangerous.

Yes, of course we should do everything possible to introduce youngsters to our hobby and encourage them to stay, but I would very

seriously question the necessity for any form of novice/student/easy transmitting licence. The plaintive demand for such a licence has been around, from time to time, for as long as I can remember, and has always come from those who are either bone idle and want everything handed to them on a plate or those who simply imagine that the RAE and/or Morse Test is completely beyond their abilities and should, therefore, be dispensed with. CB fulfils that requirement admirably.

I have been teaching the RAE and associated Constructional classes for many years, with considerable success as several hundred amateurs around Nottingham can testify, and feel well qualified to comment on this aspect of the discussion.

In any typical RAE class, most of the students start with no previous knowledge of the subject. Their ages range from under 14 to well

past retirement and their educational backgrounds vary just as widely. They all have one thing in common — a real and determined interest in amateur radio.

Of course, as you would expect, most of those with some previous electronics training have no difficulty with the course or the exam and generally achieve very good results. The fact which the proponents of this scheme clearly do not appreciate is simply that most of those without any previous knowledge of electrical matters, never mind radio, also pass, first time, with many of them achieving a well-deserved reward for their hard work and keen interest in the form of a Credit or Distinction.

I see no justification for any attempt to introduce a lower standard of examination. Such easing of standards already well within reach of anyone prepared to make the effort, can only lead to the general degrading of amateur radio.

Any such simplification is totally unnecessary. The further suggestion, on page 4 of the Draft, that the exam should be passable by illiterates can be regarded as horrific, incredible or hilarious depending upon one's state of mind after having read that far.

The Draft Report states that there is a "tendency to purchase and use elaborate and expensive commercial equipment." Whose fault is that? High powered (and high revenue!) advertising together with publication of mainly "high tech" articles in *Radio Communication* and other magazines must give the impression to any potential newcomer that only after having attained a degree in electronics, sold the car and taken out a second mortgage, is it possible to participate in what must appear to be a rich man's hobby. One of the more intensive advertisers has recently tried to justify the rocketing prices of his gear by comparing them

## PW COMMENT

### Metric vs. Imperial

LIKE MANY OF YOU, I suppose, I have mixed feelings about new technology, new laws, new customs, and so on. Whilst accepting that nothing is ever perfect, it all too often seems that things which get changed were quite all right before, whereas the things that were crying out to be torn apart, changed around and generally rehashed just get left to muddle on the way they were.

One change loathed by many people, especially among our older readers, is metrication. Years ago, the government decreed that the UK should go metric, and the changeover was begun. Then, as so often happens, our lords and masters got cold feet in the face of objections from some quarters of commerce and industry, and from some sections of the public. The result, instead of either scrapping the idea completely (difficult when large parts of the world were already using metric measure) or pressing ahead regardless, was a total mess, with some things changing and others not.

The medical profession went metric, with dosages in millilitres or grams, etc. There hasn't been a 7lb baby born in the UK for years, though there have been a good few 3175 gram ones.

The building trade went metric too, though timber suppliers seemingly thought the whole idea was just too complicated, so they invented a "metric foot" of 300mm, which they christened a Timber Unit. If you went into your local hardware store (this was in the days before d.i.y. supermarkets) and ordered a 6 foot length of timber, they would call this 6 T.U.s and saw you off a piece which was short of what you wanted by 4.8mm for every foot, in other words by 28.8mm or marginally over 1<sup>1</sup>/<sub>2</sub> in on that 6ft length. Not very clever if you had wanted to use it to fix across a 6ft gap! Luckily they soon stopped this silly idea, and moved towards proper metrication, though it did take a few years more before they stopped offering you, say, 2 metres of 2 inch x 1 inch timber.

Miles of motorways and pints of beer were among those items which stayed resolutely Imperial, but lots of other industries moved part way towards metrication and then faltered for a time. Engineering was one, food another. Everyone who's studied the label on a jar of marmalade on the breakfast table will surely have it engrained in their minds that 1lb equals 454g. Knowing that, there's no excuse to get lost in conversions of small weights, provided your mental arithmetic is reasonable, or you have a calculator to hand.

When the big changeover to metric measure was first announced, we decided on *Practical Wireless* that we should go along with that change, but to make it easier for everyone to get used to the new measures, we would put the Imperial equivalent alongside each dimension. We did that for about three years, though it got pretty cumbersome in articles where there were lots of measurements quoted.

Older readers sometimes complain because we now generally used only these "new-fangled metric measurements", though we do in fact still occasionally add in Imperial equivalents where it seems to add to an understanding of the subject-matter.

The problem now is that the UK's schools went totally metric in their teaching many years ago, and anyone younger than their late twenties will probably never have been taught in feet and inches, or pounds and ounces, certainly in the senior school. I well remember my daughter, now a nurse in her mid-twenties, asking me what I meant when I said an object was about a foot long. So we can't sensibly go back to Imperial; the change has gone too far.

According to a recent newspaper report, one of the last bastions of non-metric measure, the USA, has now designated metric measurement as the official system for US trade and commerce, and all government agencies will be required to adopt it by 1992. That will leave just a few nations such as Burma and Liberia resisting metrication.

So, the days of Imperial measurements would seem to be numbered!

**Geoff Arnold**

with average wages today and in the 1920's. Rubbish! Try comparing the price of a TV in the 1950's, and its complexity, with today's version. In terms of the "average wage" the price has dropped very considerably. Why? Because of the general development and improvement in technology. So why is current amateur radio equipment so expensive?

Quite obviously we must encourage new blood into amateur radio and showing clearly that an enormous amount of inexpensive pleasure can be achieved from the simple, straightforward approach is an essential part of the campaign.

There are already many good and simple kits on the market. The RSGB would serve no useful purpose in getting involved in this field — if anything such involvement would probably increase the prices of the kits. Far better for the RSGB to promote real amateur

radio through the medium of *RadCom*, and possibly by publishing a reasonably priced magazine for the down-to-earth constructor. *D-I-Y Radio* is a start, although I found the contents a bit bland and, seemingly, aimed at the 7 to 10 age group. I know this is a pilot issue but it certainly needs a bit more thought before the next one. Have a look at the G-QRP Club's *SPRAT* if you need ideas!

There is every justification in making every effort to encourage anyone (not just the youngsters) with any interest in electronics to get maximum enjoyment out of what can be a most rewarding hobby.

There is no sense, let alone justification, in degrading amateur radio by opening the doors to all and sundry. We have a reputation and a history we can be proud of. Let's keep both — not just end up as history.

*Alan Lake G4DVW  
Nottingham*

## Studying for the RAE

I read Mr Hawking's letter (*PW* August) with interest and some sympathy, but it is up to him to take the RAE and obtain his licence.

In Clacton on Sea we suffered from a similar lack of local RAE courses. Our nearest was at Colchester, where the teaching is excellent, but the prospect of a 28 mile round trip in winter-time was not appealing.

I recommend Mr Hawking does one of three things: 1. Join his nearest amateur radio club, often these run courses for those interested. 2. Enrol for a correspondence course, of which there are many. 3. Approach the local Evening Institute to ask if they would consider starting a course for the City and Guilds Radio Amateurs' Examination. It's a good idea to get together the names of 12 or more budding radio amateurs who wish to study for a licence, and who would be prepared to enrol on a course.

This is what we did in Clacton in 1986, and I am happy to say that a 90 per

cent pass rate has been achieved by candidates from the two courses run to date.

Finally, I appreciate Mr Hawking may have considerable knowledge of wireless and radar, but does he have knowledge of the Amateur Licence regulations, bandplans, causes and cures for TVI and so on?

Sit and obtain your licence without asking for a Novice Licence; the world as a radio amateur can be yours.

*T. R. Taylor G1YCT  
Clacton on Sea*

## Morse Class


Before my husband passed his Morse test the family was subjected to Morse at every conceivable moment. It obviously rubbed off.

My 11-year-old son's headmaster was telling his class about the Morse code and wrote out the alphabet on the blackboard. When he had finished my son pointed out to him that he had put the Morse symbol for K instead of C!

*L. V. Williams G1VYL  
Morecambe, Lancs.*

Send your letter to the Editorial Offices in Poole, the address is on our Contents page. Writer of the Star Letter each month will receive a voucher worth £10, to spend on items from our PCB or Book Services, or on PW back numbers, binders, reprints or computer program cassettes. And there's a £5 voucher for every other letter published.

Letters must be original, and not duplicated to other magazines. We reserve the right to edit or shorten any letter. Brief letters may be filed via our Prestel Mailbox number 202671191. The views expressed in letters are not necessarily those of Practical Wireless.



## In Defence of Morse

As my callsign indicates, I have been a licensed amateur operator for the last 30 years and in that time I've seen "Letters to the Editor" on most subjects. These usually serve only to allow the writer to let off steam on his own particular pet hate, whatever it may be. Until now, I have been able to resist the urge to reply to some of the more fatuous of them, since the world of the letter writers seems to bear little resemblance to the real world of amateur radio encountered on the bands. However, GM0IRZ's letter in May PW has finally driven me to put pen to paper in defence of c.w. operation.

We use Morse, and particularly c.w. as a means of sending it, as a means of communication because, quite simply, it is the most effective way of communicating over long distances in terms of bandwidth and power required, and of ease of communicating with operators in other, non-English speaking lands.

First, watt for watt, Eckersley, in the RSGB *Amateur Radio Operating Manual*, quotes a c.w. advantage over r.f.-clipped s.s.b. equivalent to a 20dB power gain! I leave you to figure out how big a linear amplifier has to be to give a 20dB gain on a 100W c.w. transmitter, or how many elements you need in a beam to give the same gain.

Secondly, a.m. d.s.b. speech needs a bandwidth of 6kHz for a reasonable quality transmission, whereas in 6kHz there can be, at the minimum, six c.w. contacts going on (in times of high activity, nearer sixty, I can hear the contest operators say). Incidentally, reduction in bandwidth was one of the main reasons for the change from a.m. to s.s.b. in the 'sixties, as well

as the 6dB advantage over d.s.b. Everyone knew then that the d.s.b. was easy to generate, but the s.s.b. was better.

Thirdly, using c.w. and the commonly accepted abbreviations allows you to have contacts with the bloke who speaks only Serbo-Croat!

So there are three advantages to be gained from c.w. operation which surely destroy the claims that it is "antiquated, absurd, trivial, superfluous, vexatious and . . . barbaric". (And the gear is simple to build.)

Wait a minute, though. One of these might apply to some operators. Vexatious — yes, you must use skill to operate using Morse and you've got to work at it — and hereby lies the source of all the attacks on Morse operation. You've got to exert yourself to be good at it. You can't become a good Morse operator just by spending money. You've got to use your brain to learn it in the first place and to keep using your brain when you're using it. That's the bit that upsets the moaners!

Well, that's too bad. Like every other field of human activity, you get out what you put in and this is the point that should be presented to the young, impressionable newcomer to the hobby. In the particular case of Morse operation, the more you work at it, the easier it becomes and the more fun and satisfaction you get out of it.

So, there you are. I'm not knocking 'phone operation — I use it myself. All I'm saying is, c.w. operation offers tremendous returns for effort put in. So, call me if you hear me at the bottom end of 20 metres. I don't mind slowing down to 12 w.p.m. — and I do QSL! 73s.

*Tom Harrison GM3NHO  
Broughty Ferry*

# WRITE ON

## Coat-hanger Success!

I made the "Low-cost Indoor Antenna for 144MHz" (*PW* August 1988) exactly to the dimensions given and it was an immediate success. Local and semi-local stations gave reports of considerably improved signals compared with a  $\lambda/4$  ground plane.

The author Fred Judd G2BCX is to be congratulated on his unique approach to development of his very successful "Slim Jim".

*Roy Eldridge G3RAE  
Beccles, Suffolk*

## Young Blood

After reading your Comment in August *PW*, it is interesting to note that Wilmslow has a decline in 10 to 14-year-old children. This is perhaps one reason why when my club, the North Cheshire Radio Club, ran one of the special 75 event calls, no younger element showed any interest.

The Club Chairman had written to 22 local schools and advertised the event in the local press, and we had one 17-year-old turn up. Not one school had the manners to reply to our Chairman. Our saving grace was a newspaper advert and CB.

The shack we put together was a late 40's Heathkit transmitter plus ancient mike and a Radiovision Commander receiver, and for more modern gear an FT-ONE, a 2m Icom, packet, RTTY and ATV. All of these were in use and plenty of middle-aged people came to see and talk, but no young ones.

We now have the nucleus of an RAE course from them; the enthusiasm shown by these people has to be seen to be believed, with all their work in copper-plate neatness!

Where did we go wrong? Do young people want ham radio or are they put off at school by all these computers?

*P. W. Fryer G4SUB  
Knutsford, Cheshire*

## Resonance


My sympathy goes out to L Hawkings ("Write On", Aug, 1988). What is the point of using that silly formula which he quotes?

All my life I have used this simple one:  $f = 159/\sqrt{LC}$  where  $f$  is in MHz,  $L$  is in  $\mu$ H and  $C$  is in pF. These are the actual units which we use every day in our h.f. work.

The error using my formula is less than one tenth of 1 per cent—hardly significant. Remember, KISS—keep it simple, stupid!

*Fred Ness GD3ESV  
Douglas, IoM*

*Whilst I would agree that this simplified formula is great to use when you want to calculate resonant frequency, it does nothing at all to aid your understanding of what makes an LC circuit resonate. At the stage when you are studying for the RAE, it's that understanding which is the important thing. The short cuts come later, when you're applying your knowledge to practical circuits.—Ed.*

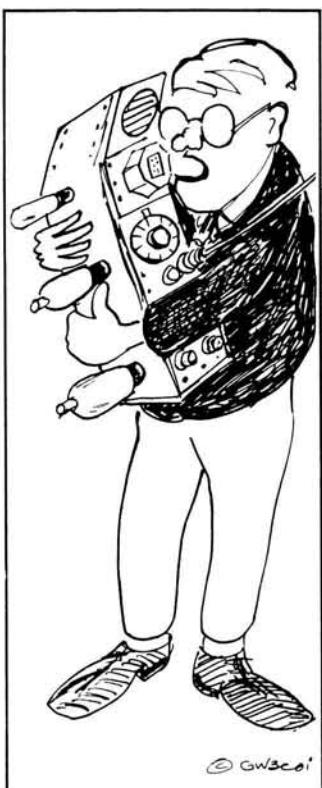

*"The rig here is an early hand held . . ."*

# OUR SERVICES

## QUERIES

We will always try to help readers having difficulties with a *Practical Wireless* project, but please observe the following simple rules:

1. We cannot give advice on modifications to our designs, nor on commercial radio, TV or electronic equipment.
2. We cannot deal with technical queries over the telephone.
3. All letters asking for advice must be accompanied by a stamped, self-addressed envelope (or envelope plus International Reply Coupons for overseas readers).
4. Write to the Editor, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, giving a clear description of your problem.
5. Only one project per letter, please.

## BACK NUMBERS AND BINDERS

Limited stocks of most issues of *PW* for the past 18 years (plus a few from earlier years) are available at £1.40 each, including post and packing to addresses at home and overseas (by surface mail).

Binders, each taking one volume of *PW* are available Price £3.50 plus £1 post and packing for one binder, £2 post and packing for two or more, UK or overseas. Prices include VAT where appropriate.

## CONSTRUCTION RATING

Each constructional project is given a rating, to guide readers as to its complexity:

### Beginner

A project that can be tackled by a beginner who is able to identify components and handle a soldering iron fairly competently.

### Intermediate

A fair degree of experience in building electronic or radio projects is assumed, but only basic test equipment is needed to complete any tests and adjustments.

### Advanced

A project likely to appeal to an experienced constructor, and often requiring access to workshop facilities and test equipment for construction, testing and alignment. Definitely not recommended for a beginner to tackle on his own.

## COMPONENTS, KITS AND PCBs

Components for our projects are usually available from advertisers. For more difficult items, a source will be suggested in the article. Kits for our more recent projects are available from CPL Electronics, and from FJP Kits (see advertisements). The printed circuit boards are available from our PCB SERVICE (see page 26 of this issue).

## CLUB NEWS

If you want news of radio club activities, please send a stamped, self-addressed envelope to Club News, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, stating the county or counties you're interested in.

## ORDERING

Orders for p.c.b.s, back numbers and binders, *PW* computer program cassettes and items from our Book Service, should be sent to PW Publishing Ltd., FREE-POST, Post Sales Department, Enefco House, The Quay, Poole, Dorset BH15 1PP, with details of your credit card or a cheque or postal order payable to PW Publishing Ltd. Cheques with overseas orders must be drawn on a London Clearing Bank.

Credit card orders (Access, Mastercard, Eurocard or Visa) are also welcome by telephone to Poole (0202) 678558. An answering machine will accept your order out of office hours.

## SUBSCRIPTIONS

Subscriptions are available at £15.50 per annum to UK addresses, £18 to Europe, and £19 elsewhere (by Accelerated Surface Post). For further details, see the announcement on page 25 of this issue.

# NEWS DESK ... compiled by G4LFM and G8VFH

## Azden PCS-6000

The Azden PCS-6000 is a v.h.f. mobile transceiver with a difference. The basic transceiver provides 25 watts of f.m. between 144 and 146MHz, but the receive capability is 118–174MHz.

Other features include scanning modes, 20 memories, priority channel, temporary memo channel, reverse repeater, etc. Each memory channel can have a whole range of data stored in it, such as auto tone-



burst, repeater shift and the like.

The transceiver should be on sale by the early autumn for something just over £300.

**Waters & Stanton Electronics,**  
18–20 Main Road,  
Hockley,  
Essex SS5 4QS.  
Tel: 0702 206835.

## OSCAR-13

As users of this new satellite will be aware, there is a section of the transponder which can be accessed from the 144–145MHz portion of the 2m band. This section had not been given too much publicity in the UK as AMSAT-DL (the designers) have especially requested that this section be used ONLY by Eastern bloc countries who do not have the privileges most of us in the Western world enjoy as regards the 1269MHz uplink. The 144MHz approach enables our friends in the Eastern Bloc to talk with us in the West without undue hassle, via the space bands. That in itself should be a good reason for not degrading the name of AMSAT to the rest of the amateur radio population by abusing the 144MHz section

of the band which is used (in the UK at least) by mixed mode and other group operation.

There is, however, a wider issue. That of complete and future co-operation between USSR and the west in the launch of satellites for AMSAT world wide. This may not be immediate, but plans are afoot on both sides of the "curtain" to achieve this goal. Therefore we in AMSAT say, please refrain from the use of 144MHz uplink on this satellite.

Obviously there will be people who would like to put their point of view, and to this end AMSAT-UK and AMSAT-DL have been getting people to write with their views on the matter.

By this means, we hope to correct a situation to the benefit of the majority, which could have been

avoided if IARU and National Radio Societies (RSGB included) had given a response to AMSAT's request for input some eighteen months ago, before the satellite was launched in June this year.

Finally, to those radio amateurs who have been the subject of QRM by the few satellite users who have used this band to date, we apologise on their behalf. However, on a check of callsigns used in the UK, from our own reports, it is certain that 90 per cent of those on this uplink are NOT AMSAT-UK members. To the others we say, please respond to the spirit of amateur radio and help us correct a situation which has arisen and which can be corrected.

**Issued jointly by  
AMSAT-DL and AMSAT-  
UK.**

## Special Event Stations

**GB8AER:** This station will be operational on 144MHz f.m. for the 8th Army El Alamein Reunion on October 29 from the Winter Gardens, Blackpool. The station will be situated at the top of the Opera House Stairway and they would like especially to work RSARS, RAFARS and RNARS members. **G2DHV. QTHR.**

**GB8EAR:** This station will be operational on 144MHz f.m. from the Great Hall, Town Hall, Hove for the El Alamein Reunion on October 22. **G2DHV. QTHR.**

## MuTek Returns to Amateur Radio

MuTek Ltd., a highly respected name within the specialist v.h.f. community, is about to resume the manufacture of its range of amateur radio products.


Formerly owned by Jane and Chris Bartram G4GDU, the company was founded in 1979 and grew to prominence manufacturing Chris's high performance designs. These included pre-amplifiers, transverters and filters, often employing innovative technologies.

In 1987, following the diagnosis in Jane of multiple sclerosis, Chris decided to cease manufacture and to concentrate on offering a professional radio frequency and analogue circuit design service under his own name. The designs still existed, however, and early in 1988, a keen young r.f. engineer, Mike Dorsett G6GEJ, contacted Chris with a view to resuming production.

After fairly lengthy negotiations, Mike went ahead and purchased MuTek and is engaged in putting the range back into production. As the technology has moved on over the last few years, much of the range is being up-dated by both Mike and Chris, who will also provide new designs in the future.

MuTek Ltd., will be appearing at a few rallies this year, but the major effort will be directed at re-establishing the product range.

More details about MuTek from:  
**Mike Dorsett G6GEJ.**  
Tel: 0602 729467.

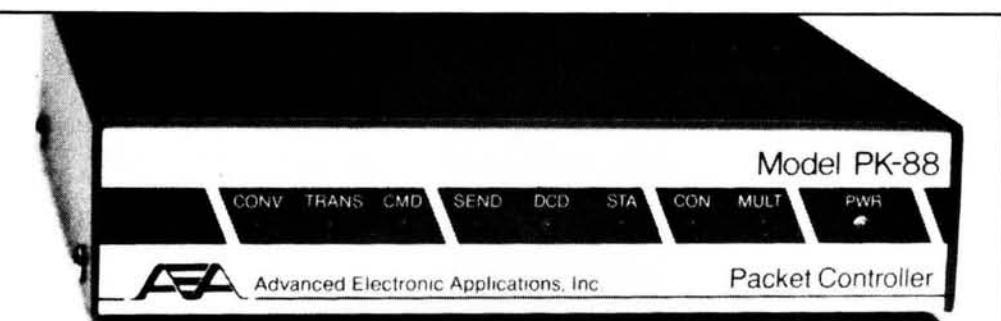

## Packet Radio TNC

ICS Electronics Ltd. have announced their new PK-88 packet radio controller. This is a successor to the PK-87, which is already in use at a number of UK licensed packet repeater sites.

Like its predecessor, the PK-88 permits "Host Mode" control by the driving

computer. This means that the computer software can regularly poll the TNC for status information. Suitable software (also available from ICS) permits the user to see status information on the screen and enables much tighter control of the TNC by the host computer software.

Compared with the PK-87, the PK-88 is physically much smaller and is lower in cost—£109.95 inc.

However, ICS says there have been no compromises made in its design. It has all the capabilities of the PK-87, as well as its own personal mailbox facility, increased RAM size and the ability to interface at either t.t.l. or RS232 voltage levels.

**ICS Electronics Ltd.**  
PO Box 2,  
Arundel,  
West Sussex BN18 0NX.  
Tel: 0243 65655.

# NEWS DESK ... compiled by G4LFM and G8VFH

## Electrostatic Protection

Cirkit Distribution now market the Chiploc range of electrostatic shielding and dissipative packaging bags.

They provide protection for static sensitive semiconductor devices and assemblies. Other applications could include holders for documents in clean room areas.

There are two varieties of bags available, the ES version for electrostatic shielding and DP version for controlled static dissipation requirements. Both may be supplied in closure or non-closure formats and are fully transparent.

Both bags employ static dissipative film layers and do not require a certain minimum humidity level to provide electrostatic shielding. This means that static control is available in all seasons and in a wide



range of physical environments.

Both styles of bag can be supplied in 18 sizes, with a 9mm average heat seal on the ES version and an average lip of 28mm above the zip. Further information is available from:  
*Cirkit Distribution Ltd., Park Lane, Broxbourne, Herts. EN10 7NQ.*

## CALSOD

This is a software package for computer-aided loudspeaker system optimisation and design. The program runs on IBM PC/XT or compatible computers with at least 512K bytes of RAM and a graphics card.

Only a very brief description of a few features can be given here. A total of four different loudspeaker drivers can be used to simulate a loudspeaker system consisting of a maximum of seven drivers. Standard filter target functions include Butterworth, Linkwitz-Riley and constant voltage designs. It is also possible to include user defined transfer functions if required.

By using CALSOD, the speaker designer can create crossover networks in a fraction of the time it would take to go through the design and testing cycle. Also, a much more detailed analysis can be carried out at the design stage.

**Audiosoft,**  
128 Oriel Road,  
West Heidelberg 3081,  
Melbourne,  
Australia.


## Reciprocal Licensing in NZ

The reciprocal licensing rules seem to have changed recently in New Zealand. The Reciprocal Licensing Bureau's address is:  
*Russ Garliek ZL3AAA, 23 Lydia Street, Gray Mouth, New Zealand 7801.*

You may obtain an application form for the licence which is valid for 12 months; two weeks notice is needed.

A "short term" licence is also available, it's valid for 14 days and is issued without prior application, "walk in, over the counter".

The Licensing Authority is now known as the NZ Radio Frequency Service. For more details, contact the RSGB or Russ Garliek.

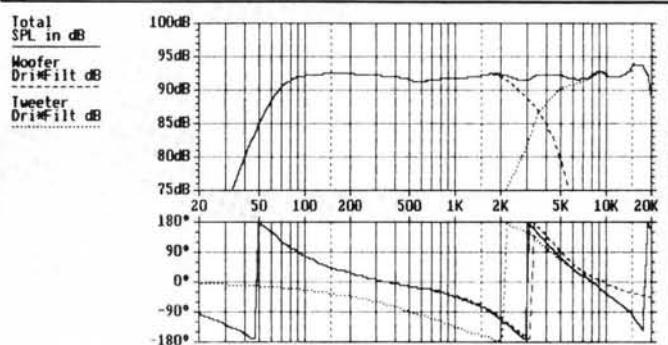

## Computer Club '88

Computer Club '88 on October 15 provides an opportunity for computer enthusiasts of all ages and interest to get together in Wallsall. Attractions provided will include communications, desktop publishing, computer music, computers and amateur radio, applications, games, PD software, a raffle and a bring and buy stand.

Simple refreshments will be available and there are plenty of pubs and other eating establishments within easy reach of the show.

The venue is the Blue Coat Comprehensive School, Birmingham Street, off Springhill Road, Wallsall, West Midlands. Car parking is both extensive and free, the entry fee is £1 for adults, 50p for the under 16s. Doors are open from 10am to 4pm.

## Six Trace 'Scope

The Hameg HM806 oscilloscope is capable of displaying signals from d.c. to 80MHz on three channels with two timebases, delay lines and trigger display.

The display is an 8 x 10 division c.r.t. with internal graticule and accelerating voltage of 14kV. Maximum sensitivity is 1mV/div. Timebase A covers 2.5s-5ns/div and timebase B covers 0.2s-5ns/div, including a x10 magnification.

When operating in the alternating timebase mode, the normal signals are displayed together with expanded signals resulting in a six-trace display.

The HM806 features a separate 2nd trigger facility with independent slope and level selection. Reliable triggering of the main timebase is ensured to above 100MHz, even at small signal amplitudes of less than one division.

An active TV-sync-separator is included which substantially enhances triggering of noisy or distorted video signals. For more information, contact:  
*Levell Electronics Ltd., Moxon Street, Barnet, Herts. EN5 5SD.*

## The Mary Rose Award

The Marconi Radio & Electronics Society sponsor The Mary Rose Award, recently they have had to revise the rules:

There is no start date or termination date for this award and all bands and modes can be used. No QSLs are required but a certified check list, as per the log sheet, must be signed by two amateurs or an amateur club official.

UK and European stations must work twenty-five stations within the Hampshire and Isle of Wight boundaries. Stations outside Europe must work ten stations in the same area.

The Marconi Club HQ station is not mandatory, but extra points are available from working it. The appropriate calls are: GB2MAR and G4JMR, these count as five points if appearing once in a check list. Special event stations run by the club also count.

Should a station be fortunate enough to contact HQ under more than one call, the second HQ call will count as one point only, and a maximum of seven points can be obtained this way.

Silver endorsement stickers are available for 50 points and Gold stickers for 100 points.

The basic award costs £3.75 for European and UK stations, £5 for outside Europe. The Silver and Gold endorsements cost £1 each.

**V. Scambell G3FWE**  
**Marconi Radio & Electronics Club**  
**Solent View**  
**78 Slade Road**  
**Isle of Wight**

## Hand-held 1296MHz

The Icom IC-12GE is a hand-held 1296MHz f.m. transceiver. The output power of the rig is 1W, switchable to 0.1W and there is an automatic power saver which keeps the battery drain down to 20mA when no signals are received.

Even on this hand-held, there are twenty memories which not only store the frequency but the repeater information too, if any. The Programmed Scan function scans all the frequencies between two programmable edges, whereas the Memory Scan scans the memories, except the one you choose to skip.

For further details on this hand-held, contact:

**Icom (UK) Ltd**  
Sea Street  
Herne Bay  
Kent CT6 8LD  
Tel: 0227 363859

## Multimeter ME4055

Solex has added the ME4055 High Performance Heavy Duty Multimeter to its range. The unit is ruggedised and sealed which makes it drop, water and grime proof. As standard the model ME4055 comes complete with a three-year warranty.

The unit incorporates many features including high accuracy d.c. voltage

## Radio Telex System

ICS Electronics have announced a new, low-cost error correcting radio telex system for commercial and marine applications using h.f. radio links.

The TOR-1 is built into a rugged die cast enclosure and is fully waterproof. Power consumption is less than 1 watt at 12 volts and 2 watts at 24 volts. It corresponds fully to CCIR recommendation 476-2 and operates in ARQ, FEC and SELFEC modes. Configuration information is held in non-volatile memory. The unit can also be used for AMTOR in the amateur bands.

The cost of the unit is £499.95 and for more details, contact:

**ICS Electronics Ltd.**  
PO Box 2,  
Arundel,  
West Sussex BN18 0NX.  
Tel: 0243 65655.

readings (0.1% r.d.g.), temperature testing, data hold, min/max hold, frequency testing, 40 segment bar graph display, auto or manual ranging and auto power down mode. A yellow case is provided.

Full specification and ordering details are available from:

**Solex International,**  
95 Main Street,  
Broughton Astley,  
Leics. LE9 6RE.

## Rally Calendar

**October 18:** ELHOEX 88 (Electronic Hobbies Exhibition) is being organised by The Hornsea ARC in the Floral Hall, Hornsea. There will be traders, AMTOR and Packet demos, club stands and much more there. Doors open 11am. More from: **G4IGY.** Tel: 0864 533331.

**October 23:** The first privately organised Warrington Communi-Constructor Fair will be held at the Great Sankey Forum, close to junction 7 off the M62. Doors are open from 10.30am to 4pm. The event will have a strong emphasis on constructor's components, communications and computer related equipment. It's also expected that there will be a

vintage radio, valve and hi-fi presence. Details from: **Bernard.** Tel: 0772 435858.

**November 5:** The Eighth North Devon Radio Rally is to be held in Bradworthy Memorial Hall (near Holsworthy). Doors are open between 10.30am and 5pm. There will be the usual attractions, including a bring and buy. Talk-in will be on S22. More from: **G8MXI.** QTHR.

**November 20:** The Bridgend & District ARC Rally will be held at the Bridgend Recreation Centre, Angel Street, Bridgend. Doors open 11am. There's free parking, a bring and buy, bar facilities, etc. Talk-in will be on S22. Details from: **Mike GW6XCG.** Tel: 0656 724041.

## Eureka TV

Mr Kenneth Clarke, Minister of Trade and Industry, has announced that his department will be providing £1.7 million financial support for participation by Quantel Ltd and Philips Research Laboratories in a major Eureka project to develop a high definition television system. This takes the total DTI support to UK participants in the HDTV project to £4.8 million. project to £4.8 million.

Quantel will develop a range of high definition editing and image manipulation equipment and

Philips Research Laboratories will be making a major contribution to research into picture analysis and coding techniques associated with the transmission and display of high definition signals.

A major demonstration of the Eureka system will take place at the International Broadcasting Convention in Brighton in September this year. Further demonstrations will take place in 1989, with the objective of having the Eureka system adopted as a world standard by the CCIR in 1990.

## Chart Recorders

Electronic Temperature Instruments Ltd. have now included Rustrak chart recorders to their range of temperature measurement instrumentation.

Rustrak strip chart

recorders are available to measure both temperature and humidity. The size of the recorders make them suitable for both portable applications and control panels.


The humidity chart

recorder is designed to monitor both temperature and relative humidity or air/gases. Relative humidity is defined as a percentage of water vapour present in the air/gas in relation to the saturation level that

could be achieved at temperature.

The recorder samples the humidity sensor every eight seconds and prints a dot on the chart. Four seconds later, the recorder switches to the temperature channel and its sensor. The series of dots make continuous lines, the right-hand channel has a short break in its trace every 12mm of chart travelled, this provides channel identification should the traces overlap each other.

The prices for these instruments start at £199 for the basic temperature recorder. If you would like more details on the range of equipment, contact: **PO Box 81,** Worthing, West Sussex BN13 3PW. Tel: 0903 202151.

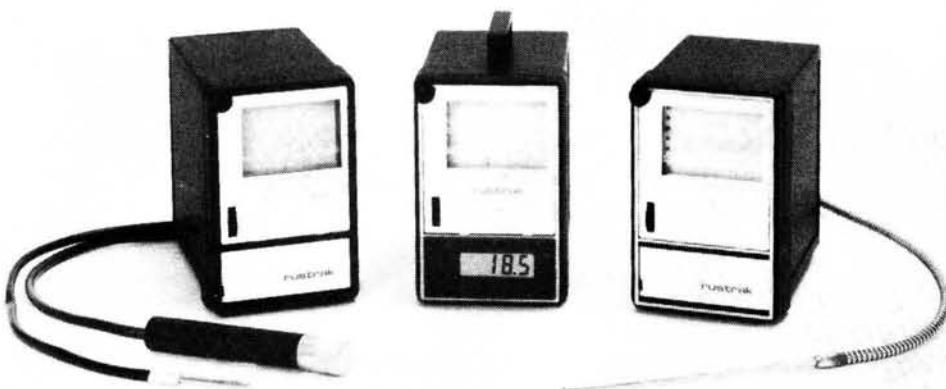

# NEWS DESK ... compiled by G4LFM and G8VFH

## Shielded Coil Forms

Cirkit Distribution have introduced a comprehensive range of shielded coil forms manufactured by Micrometals of California. The assemblies include both an adjustable threaded core and a fixed cup to close the magnetic path.

Iron powder cores are offered as standard, with ferrite cores available for applications requiring higher inductance at lower frequencies. Winding forms may vary from series to series, with impregnated paper tube, polyester tube and nylon bobbins available. Shielding cans for electromagnetic shielding are made of copper with tin plating to ensure performance.

A thermoset plastics that will not deform at elevated temperatures is used for the plastics moulded bases and all pins are copper tin plated.

For further information, contact:

**Cirkit Distribution Ltd.,  
Park Lane,  
Broxbourne,  
Herts. EN10 7NQ.**

## Lincoln Century Award

This award is available to licensed amateurs and s.w.l.s. A list showing full details of the contacts made/heard should be certified by two other licensed amateurs.

All the contacts must be made from the same location, but contacts via satellites or repeaters don't count. The award can be claimed for any permitted mode and all bands may be used. Any claims for above 50MHz should be single band.

There are four classes of award E to A and contact must be made with Lincoln Cities and Counties throughout the world.

Lincoln Short Wave Club stations G5FZ or G6COL count as 30 points.

Any station in the City of Lincoln, England or any other town or city in the world with the name Lincoln counts as 20 points.

Any station in the County



## New PK-232 Software

There are now two new software packages for the PK232 available from ICS Electronics.

Comm-Fax is a comprehensive package for the Commodore 64 computer. It allows facsimile images to be both sent and received. Received images can be shown on the screen, zoomed, justified, stored on disc or printed.

The second piece of software is a driver program for the Sinclair QL computer. Again, this is a comprehensive package, it supports all of the data modes of the PK-232. Facsimile images can be fed to a printer, but not to the screen.

**ICS Electronics Ltd.  
PO Box 2,  
Arundel,  
West Sussex BN18 0NX.  
Tel: 0243 65655.**

of Lincolnshire, England or in any Lincoln County in the USA counts as 10 points.

The five stages of award require the following points value:

E = 100 points  
D = 200 points  
C = 300 points  
B = 400 points  
A = 500 points

The award costs £1.00 sterling or 5 IRCs and is available from:

**The Secretary  
Lincoln Short Wave Club  
Pinchbeck Farmhouse  
Mill Lane  
Sturton by Stow  
Lincoln LN1 2AS**

## Corrosion Resistant Soldering Iron

The Viking thermally-balanced soldering iron has a stainless steel shaft and tip-retaining collet. This makes it resistant to corrosion.

An extensive range of long-life tips are available. These include chisel and double-flat types as well as extended point and an i.c. desoldering tip for devices with 14 or 16 pins.

The iron is balanced for comfortable use and has a large smoothly-contoured safety ring to guard the operator against possible

## EUCW Fraternisation

The European CW Association's major event of the year takes place on November 19/20. All amateurs are welcome to join in this event, high speed/low speed, high power/low power, veteran or beginner, and there is an s.w.l. section as well.

This is not a contest in the strictest sense, although certificates are awarded to the first three stations of each class. All participants are encouraged to send in logs whether they work a few or many stations.

The idea is to encourage c.w. operators of all abilities to come on the air, to meet fellow enthusiasts in a friendly spirit, and to demonstrate that c.w. is alive and well. Out of consideration for other band users, the times and frequencies have been arranged to cause minimum interference to stations not taking part in the event.

**Nov 19: 1500–1700UTC using 7.010–7.030MHz & 14.020–14.050MHz;  
1800–2000UTC using 3.520–3.550MHz & 7.010–7.030MHz.**

**Nov 20: 0700–0900UTC using 3.520–3.550MHz & 7.010–7.030MHz 1000–1200UTC using 7.010–7.030MHz & 14.020–14.050MHz.**

A copy of the full information sheet can be obtained by sending an s.a.e. to:

**G4FAI, 1 Tash Place,  
London N11 1PA.**

contact with the hot shaft. The Viking has a power rating of 27W, which gives a tip temperature of approximately 390°C.

In addition to mains operation, the iron can also be supplied for use with 12, 24 and 50V supplies. The weight is 100g and the length 215mm.

For more details on this soldering iron, contact:  
**Electronics & Computer Workshop Ltd.,  
Unit 1,  
Cromwell Centre,  
Stepfield,  
Witham,  
Essex CM8 3TH.**

BRITISH  
DESIGNED AND  
MANUFACTURED

# Two metre transceivers that you have been waiting for **AMR 1000/S**



AMR 1000S

**A**t last, a genuinely new and highly innovative development is available in amateur radio equipment with the introduction of the Navico AMR 1000 range of transceivers. You, the radio enthusiast, now have the choice of fully featured British built equipment, plus a full range of accessories that offer the best in the world for quality, performance and value.

Navico is already known and trusted throughout the world by professionals in marine communications, where absolute reliability is vital.

Now the Navico skill and experience has been applied to the world of amateur radio, resulting in two-metre transceivers that are not just variations on existing equipment, but have been designed with the operating needs of you, the user, as a priority. The AMR 1000 and 1000S have the look, the feel, and the features that radio hams have been asking for. These include:-

- Instant access to IARU FM band plan channels - a unique Navico development
- Intelligent tone burst - another innovative "first"
- Advanced design that gives uncluttered, ergonomic ease of use and the unique reversible panel

that allows for correct mounting in any location

- A choice of models that doesn't force you to buy features you don't need.

This quality British designed and manufactured unit is available now at prices starting from just £247.25 (inc VAT)

**NAVICO**

#### PRIORITY INFORMATION REQUEST

For full details send to:  
Navico, Star Lane, Margate, Kent  
CT9 4NP, United Kingdom  
Telephone: 0843 290007

See us  
on stand 42D  
at the Leicester  
show

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

TEL \_\_\_\_\_

The professionals in amateur radio

# Yesterday's World of Technology

In this short series, F. C. Judd G2BCX takes a look back through Electricity, Magnetism and Sound in the 19th Century. In Part 1, he describes how to build your own replica Wimshurst machine.


Even during the reign of Elizabeth I there was great interest in the physical properties of electricity and magnetism. In the years that followed, other physical agents (light and sound for instance) became subjects for exploration. A little before the start of the 19th Century, there began an era of experimental science resulting in an enormous number of discoveries and inventions that stemmed from the, then much wider, knowledge of physics.

Only a few of these, based on electricity, magnetism and sound can be dealt with in this short series. It can be said, however, that a great deal of modern technology in radio communication, electronics applications, sound recording and reproduction and the generation of electric power is based on that developed during the 19th century.

Long before G. Marconi designed his apparatus for "wireless" communication, systems employing electricity and magnetism were in operation for communicating over distances along wires. Examples were the electric telegraphs which included the Morse system, Wheatstone's and Cooke's single needle telegraph, numerous "dial" methods which indicated letters of the alphabet at a remote station and even one known as Cowpers Writing Telegraph—an invention that faithfully reproduced, at a distance, an exact "facsimile" of a person's handwriting.<sup>1</sup>

## Discoveries & Inventions

As only a few of the enormous number of discoveries and inventions of this era concerned with electricity, magnetism and sound can be dealt with, numerous references are given—including the book *Ganot's Physics*. From these, the reader can obtain not only information concerned with interesting and instructive experiments, but also greater details of many other important inventions. Sufficient, in fact, for constructing working replicas of some from readily available materials and without the use of special tools. For example, the Wimshurst machine for generating static electricity as well as an Electrophorous, an Electroscope, the original Hughes microphone and

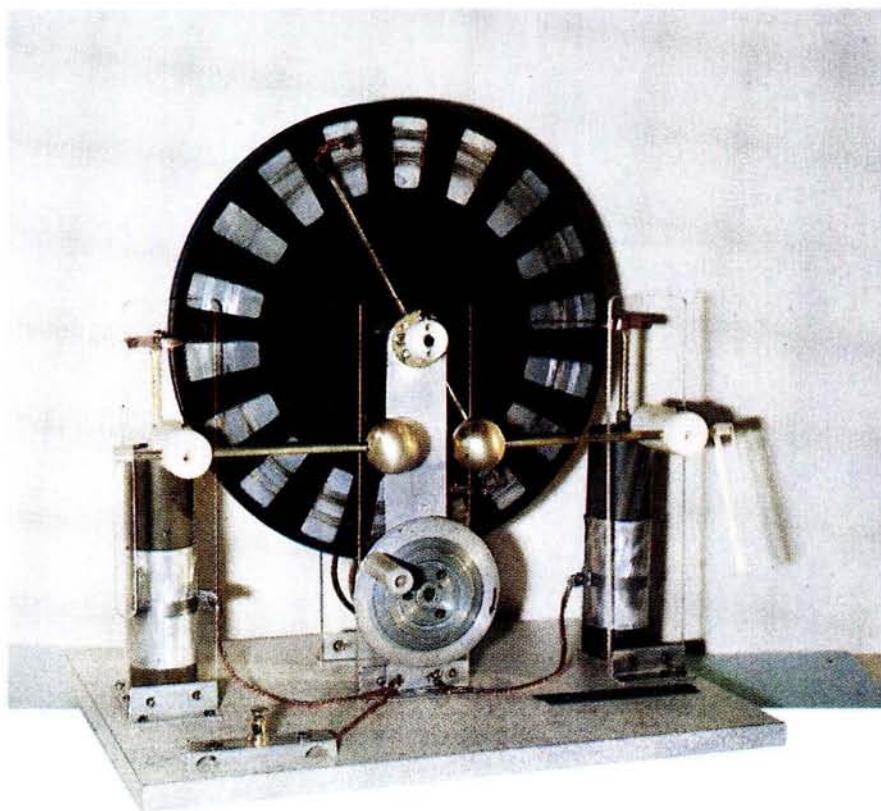

Edison's first experimental phonograph have all been constructed by the author.

## Electricity

Electricity is a powerful physical agent that manifests itself not only by attraction and repulsion, but also by luminous and heating effects and other phenomena. Unlike gravity, it is not inherent in bodies, but can be evoked by friction, pressure, chemical action, heat and magnetism. In the year 6BC, it was known that when amber was rubbed with silk it acquired the property of attracting materials very light in weight. This was static electricity produced by friction. It was not until nearly the end of the 16th century that a Dr Gilbert, physician to Queen Elizabeth I, showed that this phenomenon applied to other materials such as sulphur, wax, glass, etc.

The word "electric" is derived from the Greek *elektron* or Latin *electrum*, both meaning amber.

## The Electrophorous

One of the most simple, but effective, producers of static electricity is the Electrophorous devised by Volta. From this device, an almost infinite number of charges could be obtained from a single initial charge. The apparatus consists of a circular brass plate attached to the under-surface of a circular piece of ebonite—this assembly being known as the "sole". Another circular brass plate, slightly smaller, has a handle of insulating material attached to its centre, see Fig. 1.1. First, a negative charge is given to the ebonite sole and done originally by rubbing it with fur from a cat! (Note: there's no need to skin your neighbour's cat). Nowadays, a piece of silk or better a small piece of nylon pile carpet about 50 or 75mm square can be used by anyone wishing to experiment with this device.

Static electricity charges are then collected on the free plate by placing it on the sole. This plate is then removed


and earthed to get rid of charges of negative polarity. The positive charges left on the plate are then transferred to a Leyden Jar. The process just described is repeated a number of times to increase the voltage stored by the jar. Discharging the jar results in the production of a very large spark with quite dramatic effect.

A Leyden Jar is in effect a capacitor of low value with a very high working voltage. For more details and the construction of Leyden Jars<sup>2,3</sup> see Figs 1.5 and 1.6. Instead of ebonite, glass or Perspex may be used for the sole and the plates made from aluminium about 1mm thick.

The Electrophorus led to the invention of numerous machines for generating static electricity by automatic repetition of this process.

## Machines to Generate Static Electricity


Numerous machines for generating static electricity were produced from about the year 1740 onwards. The first was invented by Otto Von Guericke and most employed rotating glass discs or cylinders and friction pads. One

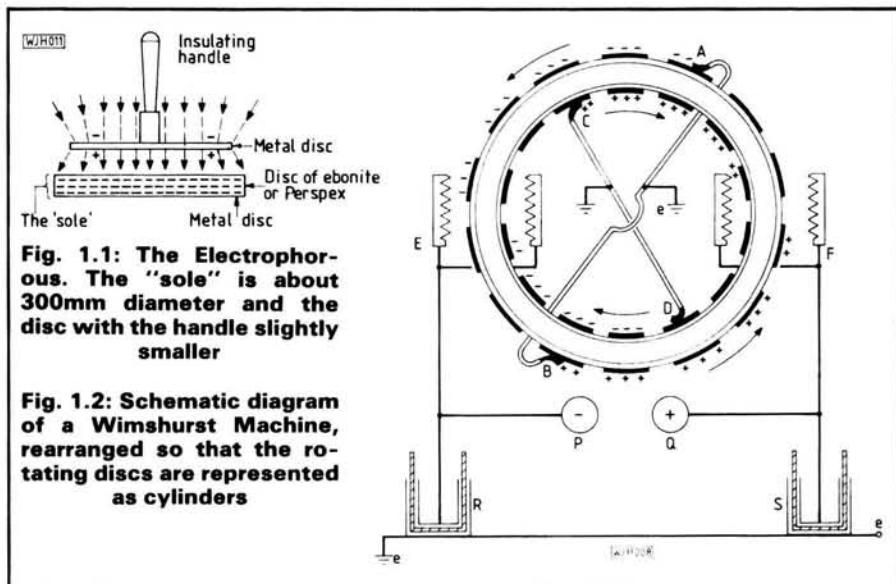

discovery, made quite by accident, was due to a workman placing one hand in a jet of steam from a boiler whilst the other was touching an earthed metal part of the engine. In the words of Ganot, "he was astonished at receiving a smart shock". What became known as Armstrong's Hydro-electric machine was developed from this occurrence.

Holtz's electrical machine employed

an induction method. Used in conjunction with two Leyden Jars, it could produce sparks 150 to 180mm long!<sup>1</sup> A relatively modern development of static electricity generation is by means of the Van de Graaff machine that can generate extremely high voltages and discharge sparks at great length. It is also used for accelerating charged particles of atomic magnitudes, e.g. protons, to high energies.

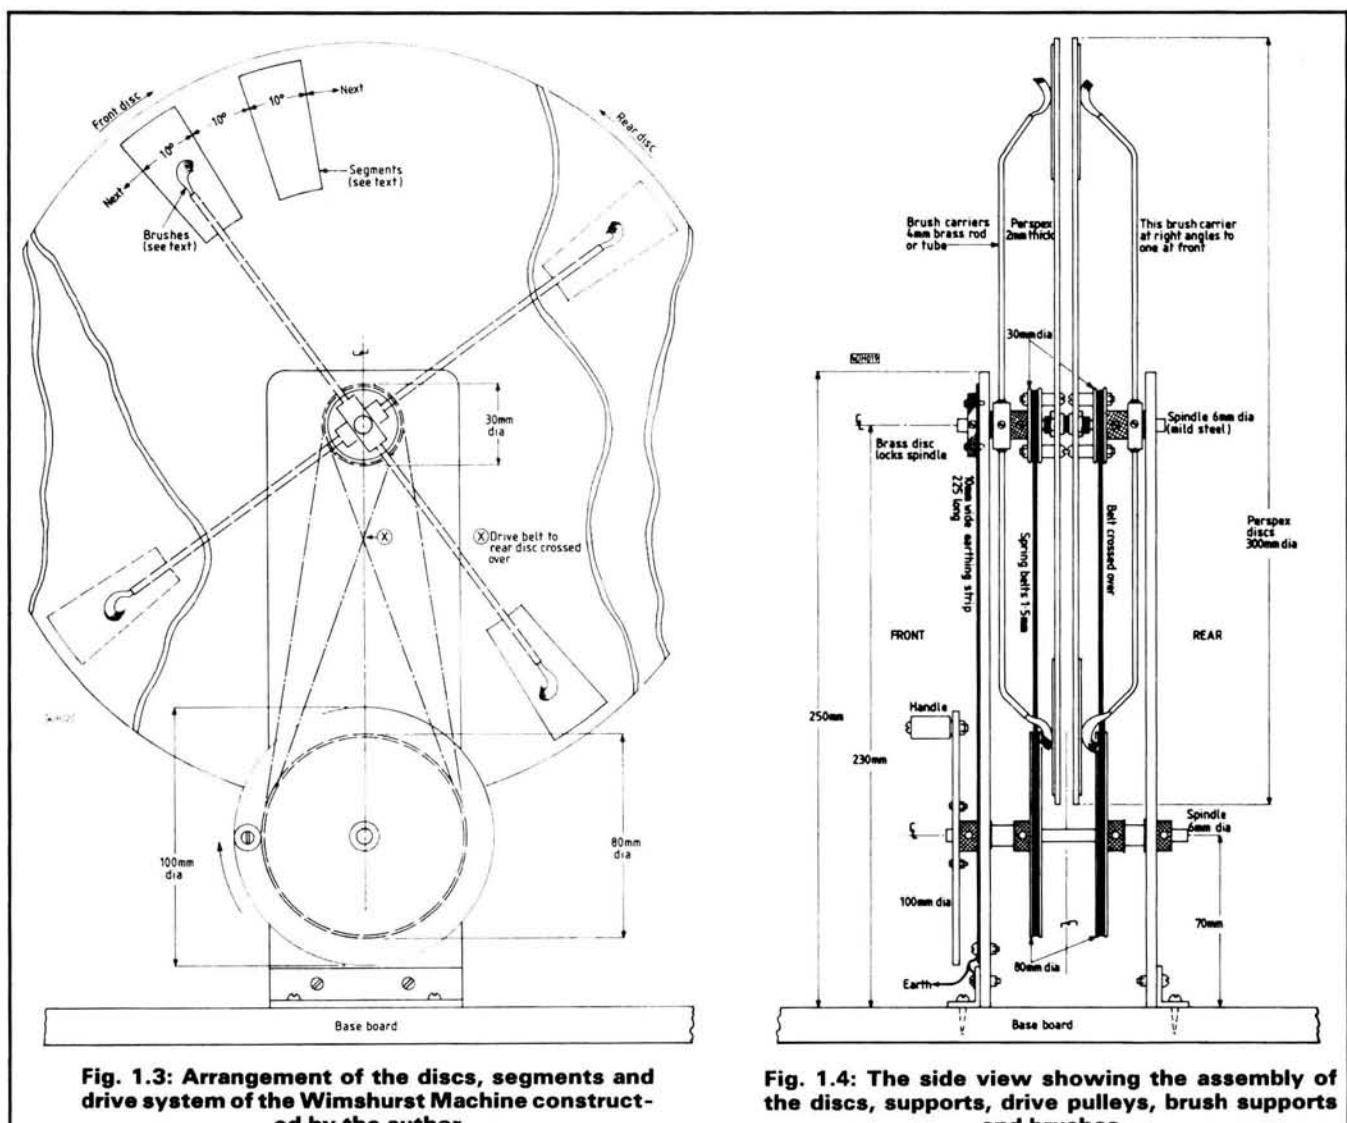


# The Wimshurst Machine

This was probably the most popular and may be found today in university and school physics laboratories. It is also called the Wimshurst "influence" machine.<sup>2,3</sup> The replica constructed by the author functions very efficiently. In very dry conditions, a spark about 35mm long can be obtained between the discharge spheres. Whilst the current is low, 1 microamp or less, the voltage is very, very high! Perhaps 60000 volts, or more. These are not "toys" to be played with carelessly.

The following is a brief description of the construction and function of the machine invented by James Wimshurst (UK) in 1882. The main components are two circular glass discs (varnished with shellac) around which are placed eighteen or more, equally spaced, metal foil strips. The two discs are mounted close together, back to back, on a common horizontal spindle and rotated in opposite directions. The way in which the machine functions is best explained with the aid of Fig. 1.2. Here, the discs are shown as vertical cylinders. Like the discs, these would be rotating in opposite directions.

At "A" and "B" are wire brushes

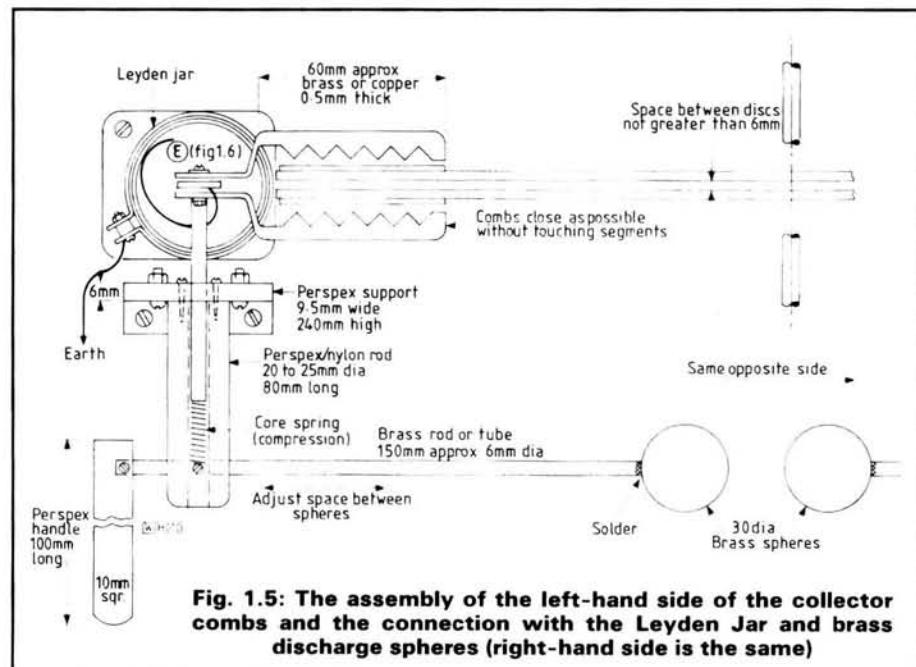

**Fig. 1.5: The assembly of the left-hand side of the collector combs and the connection with the Leyden Jar and brass discharge spheres (right-hand side is the same)**

which simultaneously touch two, diametrically-opposed, segments on one disc. The brushes are connected together by an earthed conducting rod. At this moment, charges of opposite polarity on the segments of the other disc are passing so that the segment at


"A" will receive a negative charge and that at "B" a positive charge. These charges are eventually given up, the negative to the collector at "E" and the positive to the collector at "F". Before arriving at the collectors, they play a similar part to the segments passing the brushes "C" and "D", giving those in contact with "C" a positive charge and those at "D" a negative charge. For more detailed information, readers should look up reference 3.

The two discharge spheres "P" and "Q" are connected to the collectors. When the difference in potential between them rises sufficiently, due to the accumulation of charges of opposite polarity, a spark discharge will take place. However, most Wimshurst machines are fitted with Leyden Jars, "R" and "S", one being connected to each collector. Their function is to provide a capacitance so that a higher voltage is produced at the spheres "P" and "Q". The result is a much more violent discharge with a longer spark. That's why the distance between the spheres is made adjustable.

## Working Replicas

The diagrams in Figs. 1.3 to 1.6 provide general details and dimensions of the machine the author made. The two rotating discs may be of Perspex and about 300mm diameter and 2-3mm thick. Most Perspex retailers will cut the discs for the cost of the material and an extra cutting charge.

The replica has 18 thin aluminium segments on each disc, spaced at 10 degrees and secured with Araldite. The main supports, the four pulleys and other items, as indicated on the diagrams, are made from Perspex 6mm thick. The solid brass spheres, intended for use as cupboard door knobs, can be obtained from most d.i.y. suppliers. The base board is Melamine covered chipboard about 400 x 300mm, with four rubber feet underneath. Small diameter brass tubing, 4,

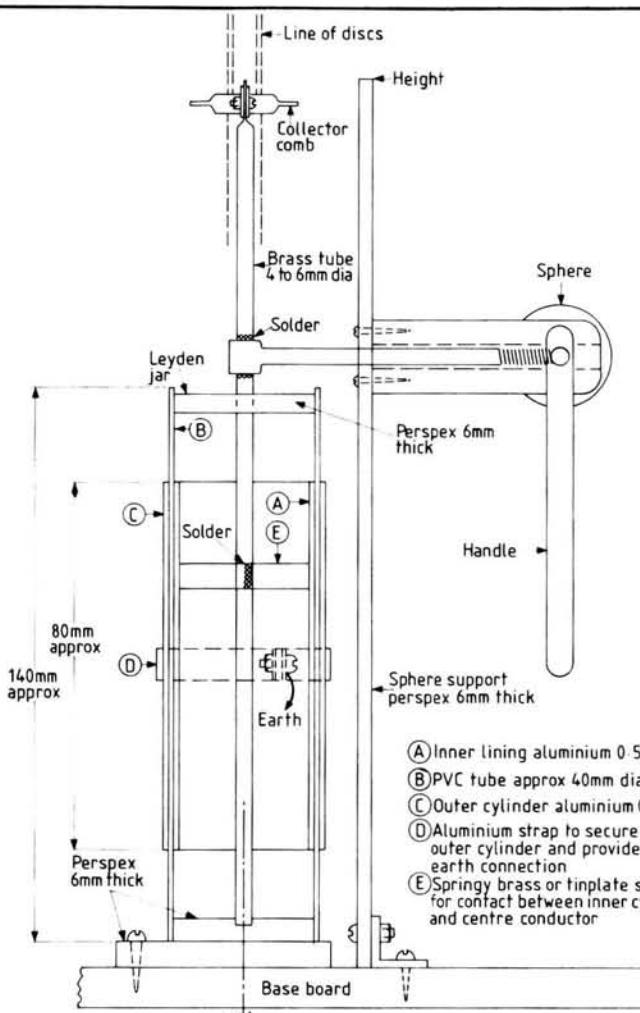


**Fig. 1.6: The Leyden Jar connections to the collector comb and discharge sphere. The base of the Leyden Jar is secured to the Perspex block beneath with Araldite**

5 and 6mm, can be obtained from dealers specialising in model making supplies. The brushes are short lengths of copper braiding from thin coaxial cable.

Ideally, the Leyden Jars should be small glass jars of about 40 to 50mm internal diameter and 140 to 150mm high, although these can be pvc tubes of a similar diameter and height, blocked each end with tight-fitting Perspex discs, 6mm thick. See Figs. 1.5 and 1.6 for details.

## Operation

Run the machine in a warm, dry room and set the spheres about 10mm apart to start with. Check in darkness for stray leakage, e.g. sparks jumping across outside the Leyden Jars. The distance between the spheres may be gradually increased for a longer spark, but this will be limited by attainable charges in the Leyden Jars, insulation leakage and humidity of the room.

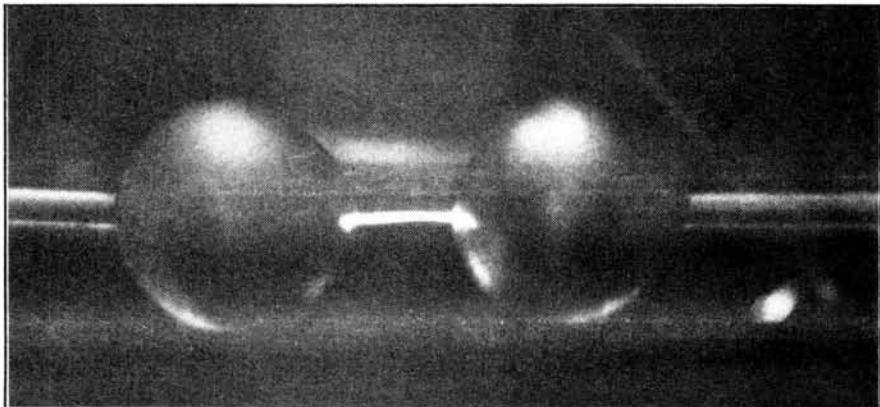

**Fig. 1.7: The spark produced with the replica Wimshurst Machine. With dry conditions, discharge sparks up to 40mm long were obtained**

**WARNING:** Always short-circuit the spheres and so discharge the Leyden Jars before touching any conducting part of the machine. A photograph of a spark from the replica machine, constructed by the author, is shown in Fig. 1.7.

Next month, we'll look at dynamic electricity, the Electroscope and sound—amongst other topics.

## References

(1) *Elementary Treatise. Ganot's Physics*. 10th Edition. (Edition 15 is best.) Originally published as *Ganot's Elements de Physique*. First English edition published 1881 by Longmans, Green and Co. London. Copies can be obtained by local libraries from The British Lending Library, Boston Spa, Yorkshire.

- (2) *Text Book of Physics* by J. Duncan and S. C. Starling. Part 5 Magnetism and Electricity. Published by Macmillan & Co., London. (1922).
- (3) *A Textbook of Physics* by E. Grimsel. Publisher not known. Extracts on Wimshurst Machine obtained from the Institution of Electrical Engineers, London.
- (4) *Electronics Inventions and Discov-*

- eries* by G. W. A. Dummer. Published by Pergamon Press, London. Available from libraries only.
- (5) *A History of the Marconi Co. (Part 1)* by W. J. Baker. Published by Methuen & Co. (1970). Copies available from the Marconi Co., St Mary's House, Victoria Road, Chelmsford, Essex CM1 1NY (Price £8.75). Also available at libraries.

# SUBSCRIPTION OFFER

One Year — £15.50  
Three Years — £40.00

Wherever you live, a Postal Subscription will ensure that you receive your copies of PRACTICAL WIRELESS and/or SHORT WAVE MAGAZINE regularly, through your own letterbox, before it gets onto your newsagent's shelf. Order a Joint Subscription and you will qualify for the Special Discount.

Fill in the Order Form below and post it to: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH15 1PP (no stamp required). Credit Card Orders taken on (0202) 678558. Overseas subscriptions outside Europe are now despatched by Accelerated Surface Post for faster delivery.

Please indicate the type of subscription required:

Special Joint Subscription



See above (UK)    £17.00 (UK)    £28.00 (UK)  
 £18.00 (Europe)    £19.00 (Overseas)    £32.00 (Overseas)  
 £19.00 (Overseas)

[Prices correct at November 1988]

To commence with issue dated

To: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH15 1PP (no stamp required).

Name \_\_\_\_\_

Address \_\_\_\_\_

I enclose cheque/PO (Payable to PW Publishing Ltd) £ .....

Charge to my Access/Visa Card the amount of £ .....

Card No.

Valid from \_\_\_\_\_

to \_\_\_\_\_

Signature \_\_\_\_\_

# Haven't You Got An Ohm To Go To?

Phil Williams G3YPQ remembers something written in the pages of PW over a year ago that sparked off this train of thought. "The unit of conductance was at one time called the MHO, although this was later renamed the SIEMENS." Practical Wireless March 1987.

Now I am sure Mr Siemens deserves recognition for his contribution to the foundations of electronics, but there are those of us who absent-mindedly lapse into megacycles, or could still be heard referring to condensers, who might miss the old mho. There was something rather appropriate about the mho being an ohm backwards as the unit of conductance. Mind you, after many years in the electronics industry I can't say I have actually had occasion to use it, nevertheless its nice to know it was there. Rather like 4 metres, I suppose.

So, purely for nostalgic reasons, next time I stumble across a  $2\Omega$  resistor, I am going to stick it on a card and pin it to the shack wall with the title "Half a mho".

Let's take the argument a little further. If the mho was the ohm backwards and the reciprocal of resistance, then the unit of resistance is the reciprocal of the siemens or the snemies. You might therefore encounter a circuit having a collector resistor of 39 kilosnemes and an emitter resistor of a thousand snemes de-coupled by a capacitor of 270 microfarads—or megadarafs.

Most of us, I suspect, would be rather honoured should our names be committed to perpetuity by giving a reference to some variable or other. I mean, no doubt there are descendants of Monsieur Ampère who are reminded almost daily of their forefather, or 4000 millifathers. And I bet they are jolly grateful too, otherwise great grandchildren Evette and Gaston Ampère would have to go through life as Evette and Gaston Voltsperohm.

The same, of course, happened with the unit of inductance named after Lenny Henry's grandad Henry Henry and his wife Millie Henry. Just as well

really, imagine the introduction at the London Palladium (or the London Atomic Weight 46) . . .

"Tonight, ladies and gentlemen, we present the multi-talented comedian and impressionist, star of *Three of a Kind*, Lenny Rate of Change of Current through a Conductor of One Amp per Second."

Doesn't quite have the same ring, does it—inductors do ring, of course, oscillate even.

Yes, it must be nice to have a unit named after you. The floppy disk, of course, remembers Dr Samuel Floppy, the first person to repeatedly manage to crash an abacus; all the little Algos resulting from Mr and Mrs Algo—discoverers of the Algo-Rhythm; and I expect Mrs Richter feels a bit special every time the earth moves.

Now, before this gets completely out-of-hand, consider the following . . .

The QRM on an 80m frequency after dark can be measured on an open-ended scale of printers, and a sked frequency automatically increases the number of printers by a factor of 3. So an evening 80m frequency can easily have a QRM value of 2 printers or in the case of a sked frequency, 6 printers. Incidentally, as we all know, attempting to reduce the value of printers by switching to upper sideband adds one to its original value. A zero printer frequency is, of course, one of those purely theoretical values which is only encountered in classrooms and shacks with "modified" CR100 receivers, except in the latter case where you can't hear anything else either.

The printer immortalises its founder Sir Telly Printer, half-brother to Telly Savalas who, after pioneering late night skeds on 80m, was forced to tear off his headphones in anguish so often that he too is as bald as a football.

As for myself, I should like to propose the introduction of the phil, or more accurately the phil ratio. This is defined as, "the ratio of drive to intelligence generated by radio data". This can be applied with equal validity to VDU Scribble and the amount of time spent in achieving such scribble.

For example, you hear a RTTY station and by the time you actually tune it in, you get something like this . . .

"XY2% DR = WWWWWWWW  
WWW /??? SSS R5 %. ZDKEUT  
BIBI FOR NOW KKK."

This has a phil ratio of about 4 to 1 and is actually not bad.

Packet radio is supposed to be completely error-free, so you would think it should have a phil ratio of 1:1. But, if you look at the average screenful of a busy 144.650 or 14.101MHz, there's not much that you could accurately describe as intelligence, is there?

Packet radio is in reality a system which selects random samples from the left-hand column of the callbook and tries to match the selections with other TNCs doing the same. You see the ROMs in a TNC contain a copy of the callbook and when you go "VHF OFF" it switches in an international section. The system has cloned itself from ERNIE, the premium bond machine, and the end result is a screenful of meaningless callsigns, one line of text saying, "The link is rather slow >>>" and a phil ratio approaching infinity.

So there we are, you might say that this article has a high phil ratio, but it was meant to entertain and not inform. So if you believe any of the previous, beware of being described as "Thick as two short Quantum Theory Constants"!

PW

## ERRORS & UPDATES

### A Constructor's Shack Test Gear, October 1988

Apologies to P. Newton, who wrote the article, for having wrongly credited his work to E. P. Essery on our Contents page.

### PW PCB Service

For details of printed circuit boards for past *Practical Wireless* projects, see page 68 of our October 1988 issue.

# SEE YOU AT LEICESTER STAND 36

## NEW BEARCAT

### IT'S HERE AT LAST!

Bearcat's latest high technology scanner is now available in this country. It covers 10\* mtrs, 6\* mtrs, Air band, High Band, UHF\* and 950MHz. The UBC 200XLT is the hand held scanner with the latest facilities - 850-950MHz in 12.5KHz steps, 200 memories in 10 Banks.

Super LCD Backlight for discreet listening in the dark, detachable Nicad pack, C.W. charger @ £249.00 (£5.00 P&P).

**ONLY LIMITED STOCKS AVAILABLE  
OUR NEXT DELIVERY IS IN  
TWO MONTHS**  
\*May vary

# RAYCOM

COMMUNICATIONS SYSTEMS LTD

TEL: 021-544 6767

## SUMMER SPECIAL OFFERS

WHILE STOCKS LAST

Icom ICR7000 + Royal 1300.....	£931.00
Icom IC3200E 25W Dual Band Mobile.....	£399.00
BJ200 Mk2 Handheld AM/FM Scanner.....	£199.50
Sony ICF2001D SW Receiver plus Airband.....	£289.00
Sony ICF7600DS Super SW Receiver.....	£159.95

## SCANNERS

YAESU FRG9600 from the company who specialises in fitting extra options, as supplied to Government departments and professional bodies. We also upgrade existing models, please call for more details, prices, delivery and information.

YAESU FRG9600 Basic Model Improved 'S' Meter + Sens	£465.00
YAESU FRG9600 / RWC Mk2 60-950MHz 'N' Connector Fitted	£495.00
YAESU FRG9600 / RWC Mk5 HF 100KHz-950MHz Active Mixer	£625.00
YAESU PAL Video Unit for above	£27.50
Icom ICR7000 25M-2GHz superb quality professional Rx	£895.00
Icom ICR7000/AH7000 Receiver plus Matching Discone	£937.50
Kenwood RZ 1 New 500KHz-950MHz Wide and Narrow AM/FM POA	
Fox VHF-UHF Multi Function Mobile Scanner FM only	£139.00
Uniden-Bearcat UBC 50XL VHF-UHF 10ch H/held Scanner	£95.00
Uniden-Bearcat UBC 70XL VHF-UHF 20ch Miniature H/held	£179.00
Uniden-Bearcat UBC 100XL VHF-UHF Airband H/held Scanner	£189.00
Uniden-Bearcat UBC 175XL VHF-UHF Airband Desk-Top	£175.00
B2200 Mk2 VHF-UHF-Airband-Military Airband H/held	£199.50
AOR 2002 25-550.800-1300MHz Desk-Top/Mobile AM/FM	£469.00
Sony Air 7 Top Quality VHF-Airband Handheld Scanner	£245.00
Package deal on above Mk3.5 FRG9600 c/w AH7000 discone, G5RV, PA4 AC PSU, complete receiving station HF-UHF including delivery UK mainland	
Add £10.00 to above price.	

PACKAGE DEAL AVAILABLE ON ALL MAKES.

IF IT'S GOOD, WE STOCK IT!

## END OF SEASON SALE

### SCANNERS

BJ200 Mk2 wide coverage .....	£195
Bearcat 70XL c/w nicads and charger .....	£169
Bearcat 100XL c/w nicads and charger .....	£179
Bearcat 175XL desktop .....	£159
Marc II 150K-1GHz .....	£375
Fox BMT P10/60 mobile/home .....	£89
Revco RS3000 mobile/home .....	£195

### TRANSCEIVERS

Yaesu FT757 Mk1 HF100W.....	£599
Yaesu FT270RH VHF 45W.....	£195
Yaesu FT727R UHF handheld .....	£395
Kenpro* KT200EE UHF handheld .....	£159
Kenpro* KT400E UHF handheld .....	£169
CTE1600 VHF handheld.....	£169

All units sold on a first come first served basis while stocks last. All equipment is new and where quoted\* ex-demonstration models. All units have full warranty.

### HANDHELDS

* - Extended Receiver coverage available, call for details
YAESU FT727R/FNB42 2.5W (5W) DUAL BANDER C/W CHGR £395.00
*YAESU FT23R/FBA10 2.5W (5W) 2MTRS £299.95
*YAESU FT73R/FNB10 2.5W (5W) 70CMs C/W CHARGER £299.95
*ICOM MICRO 2E 2.5W 2MTR HANDHELD WITH CHARGER £229.00
ICOM 32E DUAL BANDER..... £399.00

Many other types of handheld stocked, please enquire

### SHORT WAVE RECEIVERS

Yaesu FRG8800 Short Wave 100KHz-30MHz all Mode + Mem	£589.00
Yaesu FRG8800/FRV8800 as above with VHF Conv fitted	£679.00
Icom ICR-71 Top Grade Communications Receiver	£829.00
Sony PRO80 HF/VHF Handheld Scanner w/ accessories	£299.95
Sony SW101D Short Wave/Airband Receiver	£299.95
Sony SW1 Micro Short Wave Receiver	£249.00
Many more makes and models in stock. PLEASE CALL FOR PRICES DELIVERY COSTS and any advise or information, or send large SAE (Insured post and packing £10.00 Carrier £12.50)	

### YAESU FT 747GX

**£649.00** including our  
FREE fitted MOD Board!

We improve the reciprocal mixing performance by up to 15dB which gives you receive performance of higher priced rigs! Only available from Raycom, buy it elsewhere if you want SECOND BEST! YAESU IS STILL BEST VALUE FOR MONEY!

ALL CURRENT YAESU AND ICOM HF RIGS STOCKED, CALL FOR A DEAL!

### MOBILES

YAESU FT211RH 45W 2MTR MOBILE WITH FREE 1/4 WAVE ANT	£309.00
YAESU FT212RH NEW 45W 2MTR MOBILE DVS FEATURE OPT	£349.00
*ICOM IC2BE 2MTR 25W MOBILE WITH FREE 5/8 ANTENNA	£359.00
ICOM IC4BE 70cm 25W	£455.00
ICOM IC3200 Dual Band 25W	SPECIAL £399

Compare our prices!

Many other types and makes stocked, please enquire

### PORTABLES

FT290RMK2 2.5W MULTIMODE STANDARD ACCESSORIES	£399.00
FT290RMK2 2.5W MATT M/M AS ABOVE C/W NICADS CHGR	£425.00
FT290RMK2/FL2025 (STD) WITH 25W LINEAR AMPLIFIER	£489.00
FT690RMK2 6MTR 2.5W MULTIMODE STANDARD ACCES	£399.00
FT690RMK2 6MTR 2.5W M/M AS ABOVE C/W NICADS CH	£425.00
FT790RMK2 NEW 70CM 2.5W MULTIMODE DUE OUT SOON	£499.00

### ROYAL 1300 WIDEBAND DISCONE

Following the huge success and popularity of the 25-1300MHz, wideband discone antenna - Icom AH 7000 & Welz - Diamond D109 with transmit facilities on VHF-UHF amateur bands, Raycom decided to persuade a UK manufacturer to make a "BRITISH COPY!" at a very competitive price!

COMPLETE WITH PROFESSIONAL CABLE & CONNECTORS AT ONLY £65.00

P&P £5.



MADE IN  
BIRMINGHAM  
U.K.

CALL IN,  
EASY TO GET TO,  
EASY PARKING

Opening hours 9am-5.30pm 6 days, late nights Thursday & Friday till 7pm. We stay open later!


### ORDERING INFORMATION

ALL PRODUCTS WE ADVERTISE ARE NORMAL STOCK ITEMS. OUR NEW MAIL ORDER DEPARTMENT CAN NOW DESPATCH MANY ITEMS SAME DAY, BUT PLEASE ALLOW UP TO 14 DAYS. DELIVERY TIME IS SUBJECT TO CARRIAGE METHOD IF ORDERING BY MAIL. PLEASE INCLUDE CARRIAGE AND STATE YOUR DAYTIME TELEPHONE NUMBER. ALL PRODUCTS OVER £75.00 CARRIAGE FREE. PLEASE ALLOW TIME FOR PERSONAL CHEQUES TO CLEAR. PLEASE CALL BEFORE ORDERING AND FOR MORE INFORMATION

PLEASE TEL: 021 544 6767



FOR THE BEST IN AMATEUR RADIO



THROUGH YOUR CONTINUOUS AND VALUED CUSTOM, RAY WITHERS COMMUNICATIONS LTD, HAS MOVED AND EXPANDED TO ENABLE US TO OFFER YOU EVEN BETTER SERVICE AND PRICES - STILL WITH THE RAYCOM GUARANTEE, BEST EQUIPMENT, BEST SERVICE, BEST PRICES, BEST BACK-UP, AND PLENTY OF PARKING FACILITIES AND EASIER TO GET TO! WE NOW BOAST THE BEST CENTRAL FACILITIES IN THE COUNTRY. WHY NOT POP ALONG AND SEE THE LATEST TRANSCEIVERS, SHORTWAVE/SCANNING RECEIVERS AND ACCESSORIES? MOST OTHER PRODUCTS ADVERTISED IN THIS MAGAZINE ARE AVAILABLE AT RAYCOM, AND DON'T FORGET OUR EXCLUSIVE PRODUCTS AND MODIFICATIONS!

# Practical Antenna Electrometer

Most people regard atmospheric static as an unavoidable nuisance, few have ever thought of this effect as a useful weather forecasting aid or even a means of monitoring ionospheric conditions. Tony Hopwood is one of these few enlightened people, and in order to monitor this natural phenomenon he has produced the instrument described here.

Static is a fact of life for radio enthusiasts. Not only does the background fizz and crackle of a storm blanket DX reception, but it can become a real hazard when an antenna takes a kilovolt charge from a passing thunderstorm, or unusual atmospheric conditions.

A well-insulated wire antenna is an efficient collector of the atmospheric electric charge, and monitoring that charge gives a fascinating and accurate insight into present and future local weather conditions.

Because the atmospheric electrical field has a fair-weather source impedance of over  $10\text{T}\Omega$  (a Teraohm is  $10^{12}$  ohms) it can only be monitored by a high input impedance device. It is easy to build a portable and sensitive low voltage electrometer using m.o.s.f.e.t.s, but unless a stable gigohm input bias resistor is used, the instrument will only show relative field measurements, and may overload when the antenna takes a charge of more than a few volts.


## Practical Design


A practical antenna electrometer must have a high input impedance and be able to follow an input that can swing hundreds of volts positive or negative with respect to earth. It must also read accurately and be immune to damaging transients from nearby lightning strikes.

A single triode valve operated in



cathode-follower mode, hung between stabilised positive and negative h.t. (high tension) rails will do all this, as well as providing a self-calibrating readout of most atmospheric conditions.

The circuit as shown Fig. 1 is very simple and uses three valves, one triode and two stabiliser tubes. The author's choice of valve was a 6Q7GT type, mainly because it is still available new.

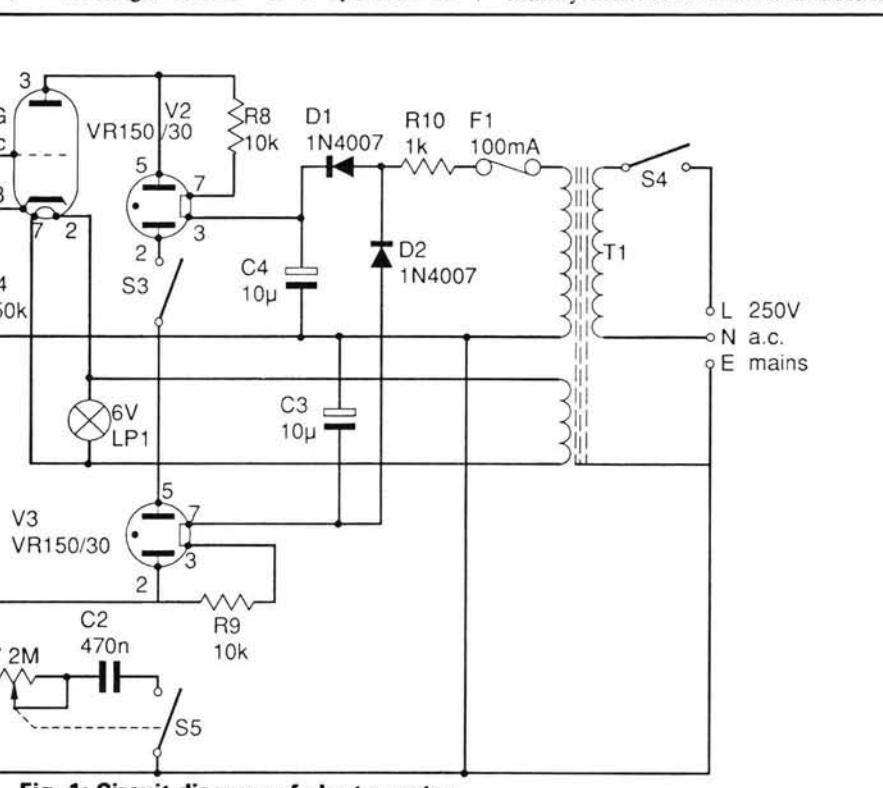

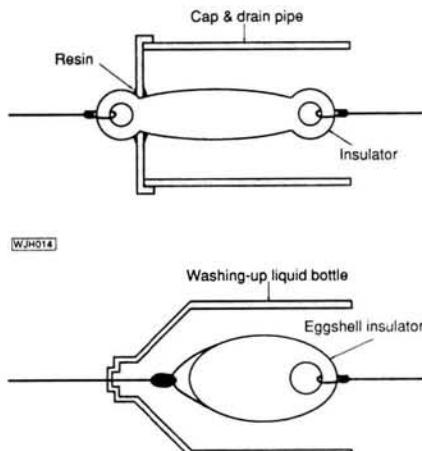

**Fig. 2: Insulators with d.i.y. rain guards. Note that a higher insulation factor can be gained by adding further insulators**

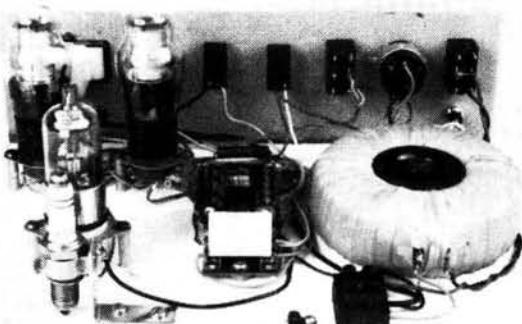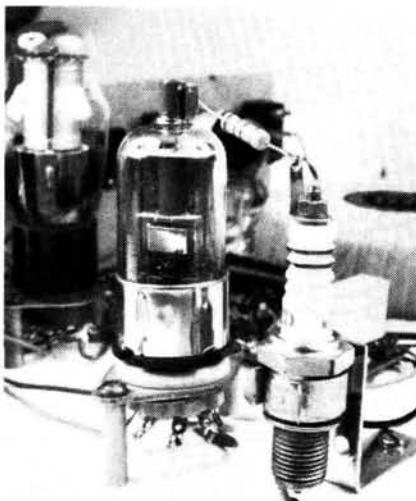

plus it has a top cap grid connection making it easy to maintain a high input impedance. However, any indirectly heated, top cap grid triode or triode strapped pentode would serve.

Transformer T1 has two secondary windings, a 250V which supplies the h.t. and a 6.3V used to power the heater of V1. Two silicon diodes D1 and D2 are connected as half-wave rectifiers across the h.t. winding of T1, providing both positive and negative rails. Two gas-filled stabilisers, V2 and V3 (VR150/30), are fed from the two half-wave rectifier networks, D1/C4 and D2/C3, providing 150V positive and negative supply rails. A stabilised supply is not essential, but does improve the small-signal sensitivity and accuracy.

Other power supply arrangements could be tried if a surplus transformer is to hand, such as the type that can be salvaged from an old valved radio. These generally have a 300-0-300V h.t. winding plus one or two heater windings. This higher h.t. voltage is permissible provided the heater-cathode insulation of the valve used is adequate and the heater circuit is left floating. A 300-0-300V supply is about the maximum that most ordinary valves and bases will take without the risk of insulation failure. In addition, with more than 600V across the valve, the small-signal background noise level will rise due to supply variations and the internal leakage of the valve.

The valve is wired with a cathode load resistor chosen to set the current at full positive input of 1-2mA. The

cathode voltage, and hence the antenna charge, is read by a centre-zero microammeter arranged as a voltmeter, scaled to suit the power supply voltage. The author used a 250kΩ potentiometer as the cathode resistor so that zero could be set with the grid of V1 earthed. Switch S1 is used to select the 200V range resistor R3, by disconnecting the 20V range shunt resistor R2.

Switch S3 is included to give the instrument the option of an extra high voltage range. Another worthwhile refinement was to provide an output attenuator giving a 5V p/p signal for driving a pen recorder. The attenuator also includes an additional variable CR damping or integrating circuit for trace averaging, as well as a switched series capacitor to give an a.c. output signal for lightning transient recording.

## Construction and Components

Both the instruments made by PW and the author's prototype were constructed using the old bread-boarding technique. There are two good reasons for this, the first being that the design, as it stands, might be termed as a semi-experimental instrument. The shape and form of the instrument will depend on each individual's requirements and component sources. The second reason for the rather exposed layout is partly due to the sensitivity of the instrument being disturbed by earth loops. This means that the use of

a metal case is rather difficult and the use of a plastics or a wooden case is not advisable due to their potential fire risk.

Good quality new components for use in valved equipment are rather difficult to come by, particularly high voltage working electrolytic capacitors. However, there is plenty of leeway, within reasonable limits, on most of the values of capacitors and even resistors, but the component working voltages must be adhered to. A good source of these components may be your local radio and TV repair shop, they do still exist! All of the valves used are still available from a number of component suppliers, a short list of which appear in the "Buying Guide".

The centre-zero meter used in the PW prototype is not as sensitive as that used in the author's original, the choice being limited by availability and price of components. The 50-0-50μA originally used often went full scale, so it shows there is some room for improvement. The values of resistance shown will support most moving coil meters up to 250μA f.s.d. If after a period of use with a less sensitive meter it seems the usable scale is rather small, try experimenting with the values of R3 and R4.

## Installation

When the readout is by moving coil meter and a servo-pen recorder with a sharp frequency cut-off above 10Hz, the induced 50Hz mains wave riding on the antenna is integrated to zero and ignored, although it may be many volts peak to peak. This "invisible" waveform will cause problems if the output is measured by d.v.m. or any instrument using switched sampling, and will have to be removed by additional signal conditioning, particularly if the electrometer output is to be recorded on computer.

A cathode follower valve has ideal characteristics for electrical field monitoring. Although the normal "fair-weather" field potential is some +100V/m from earth, the source impedance is so high that a 15m long antenna 8m above ground gives a cathode follower d.c. output signal of less than 10V positive, from a true ionic potential of nearly 1kV. This inherent signal compression is useful, as the study of electric field is more concerned with change rather than actual potential. However, the equipment is still sensitive enough to permit the recording of small field changes as well as the more dramatic events associated with convective cloud building, thunderstorms and solar flares.

## Antenna

Although an ordinary well-insulated wire antenna works well in dry weather, sensitivity falls dramatically when it gets wet. This is no bad thing in thunderstorms, but if true all-weather insulation is wanted, then additional insulators designed to preserve a dry

surface must be used. One simple method is to provide a rain hood made from either plastics drain pipe with the insulator secured with resin up inside the tube, or to use the top half of a washing-up liquid bottle to shield the insulator (Fig. 2). Lastly, experience showed that the readings were less prone to variations caused by bodily movement near the instrument, if the antenna was brought into the shack via good quality coaxial cable (UR67).

## Lightning Spikes

Although the valve will tolerate high voltage lightning spikes, the antenna can still take a charge of several kV, so some precautions are advisable. It is a moot point whether it is safer to earth an antenna during a storm, or to fit a spark gap to earth it where the system enters the building. (*On the PW prototype a small stand-off insulator was not available to terminate the antenna to RI, so a new, but surplus, petrol engine*

*spark plug was used. It was mounted on the base-board by a Terry clip bolted to a right-angle bracket. If the spark plug's outer metal case is earthed through the clip, it will serve not only as a cheap stand-off insulator but also double as a spark-gap.—Ed.*) Lightning tends to strike the highest earthed object, and earthing the antenna may turn it into a more attractive target than nearby trees, power lines or TV antennas.

If lightning does strike, anything connected to outdoor wiring is at risk, no matter how remotely connected, including radios, TVs and phones. Even if it appears to be a relatively poor path to earth it will be at risk. Remember the most likely outcome of a lightning strike is fire, fortunately this type of thing doesn't happen all that often, but be sure to keep clear of the antenna when the sparks start to fly!

As a point of safety it may be wise not to rely just on the mains earth to ground the OV line of the instrument, a

second local earth should be provided if possible, by some stout wire and an earthing spike driven into moist ground.

## Results and Research

The fact is, if you shut down the station while the storm is overhead, you will not miss much, because the field variations will be way beyond the range of the instrument. I find the most interesting recordings come from approaching and receding storms, where the field changes are attenuated by distance and become more readable. Individual lightning strokes can be recorded up to 80km away, and changes in amplitude and frequency give excellent early warning of an approaching storm. It is also possible to detect whether an approaching squall contains lightning, and by its decreasing stroke frequency, to see when lightning activity ceases in a dying storm.

47 ►



Fig. 3

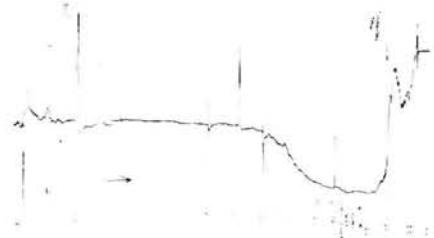


Fig. 4

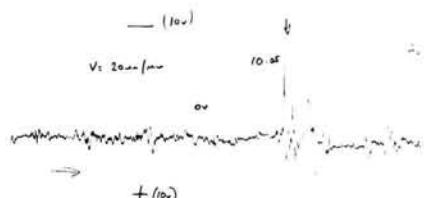


Fig. 5

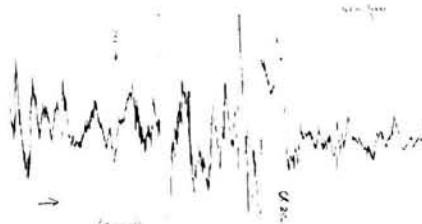


Fig. 6



Fig. 7

Fig. 3: Trace from author's electrometer shows two thunderstorm centres. Strikes 1 and 2 are about 24/32km away and show distances affect overshoot, while 3 and 4 are about 16km away and are of an unusual negative polarity. The spikes are clipped at 25V, although they peak at well over 100V


Fig. 4: Trace shows the passing of a positive charge centre overhead accompanied by heavily attenuated lightning spikes. The trace shows the characteristic voltage swing which often accompanies the onset of rain. Again the change is unusual, being from 250V positive to 250V negative in less than a second as a cloudburst started

Fig. 5: Trace shows smoke effect on a typical summer morning trace, the background being about 4V positive


Fig. 6: Trace showing Perseid meteor shower on the morning of August 12, the f.s.d. being 250mV, and shows a nice shower around 0735 hours. Meteor contacts with the atmosphere show a very definite pos/neg pulse almost sinusoidal in nature. The very large off-scale pulses are caused by low flying aircraft, which as you can see, carry a large static potential

Fig. 7: This trace is thought to have been caused by a small earthquake in California!

**Caution:** This project has a mains voltage connection and every effort must be made to insulate all live joints on the mains switch and primary of the transformer by means of sleeving. It is also recommended that the mains plug be fitted with a 2A fuse. In addition to the hazard that the mains potential represents, all reasonable precautions must be taken to limit access to circuitry within the project that carries high voltage d.c. and a.c. potentials.



# SOLDERLESS WIRING EASIWIRE

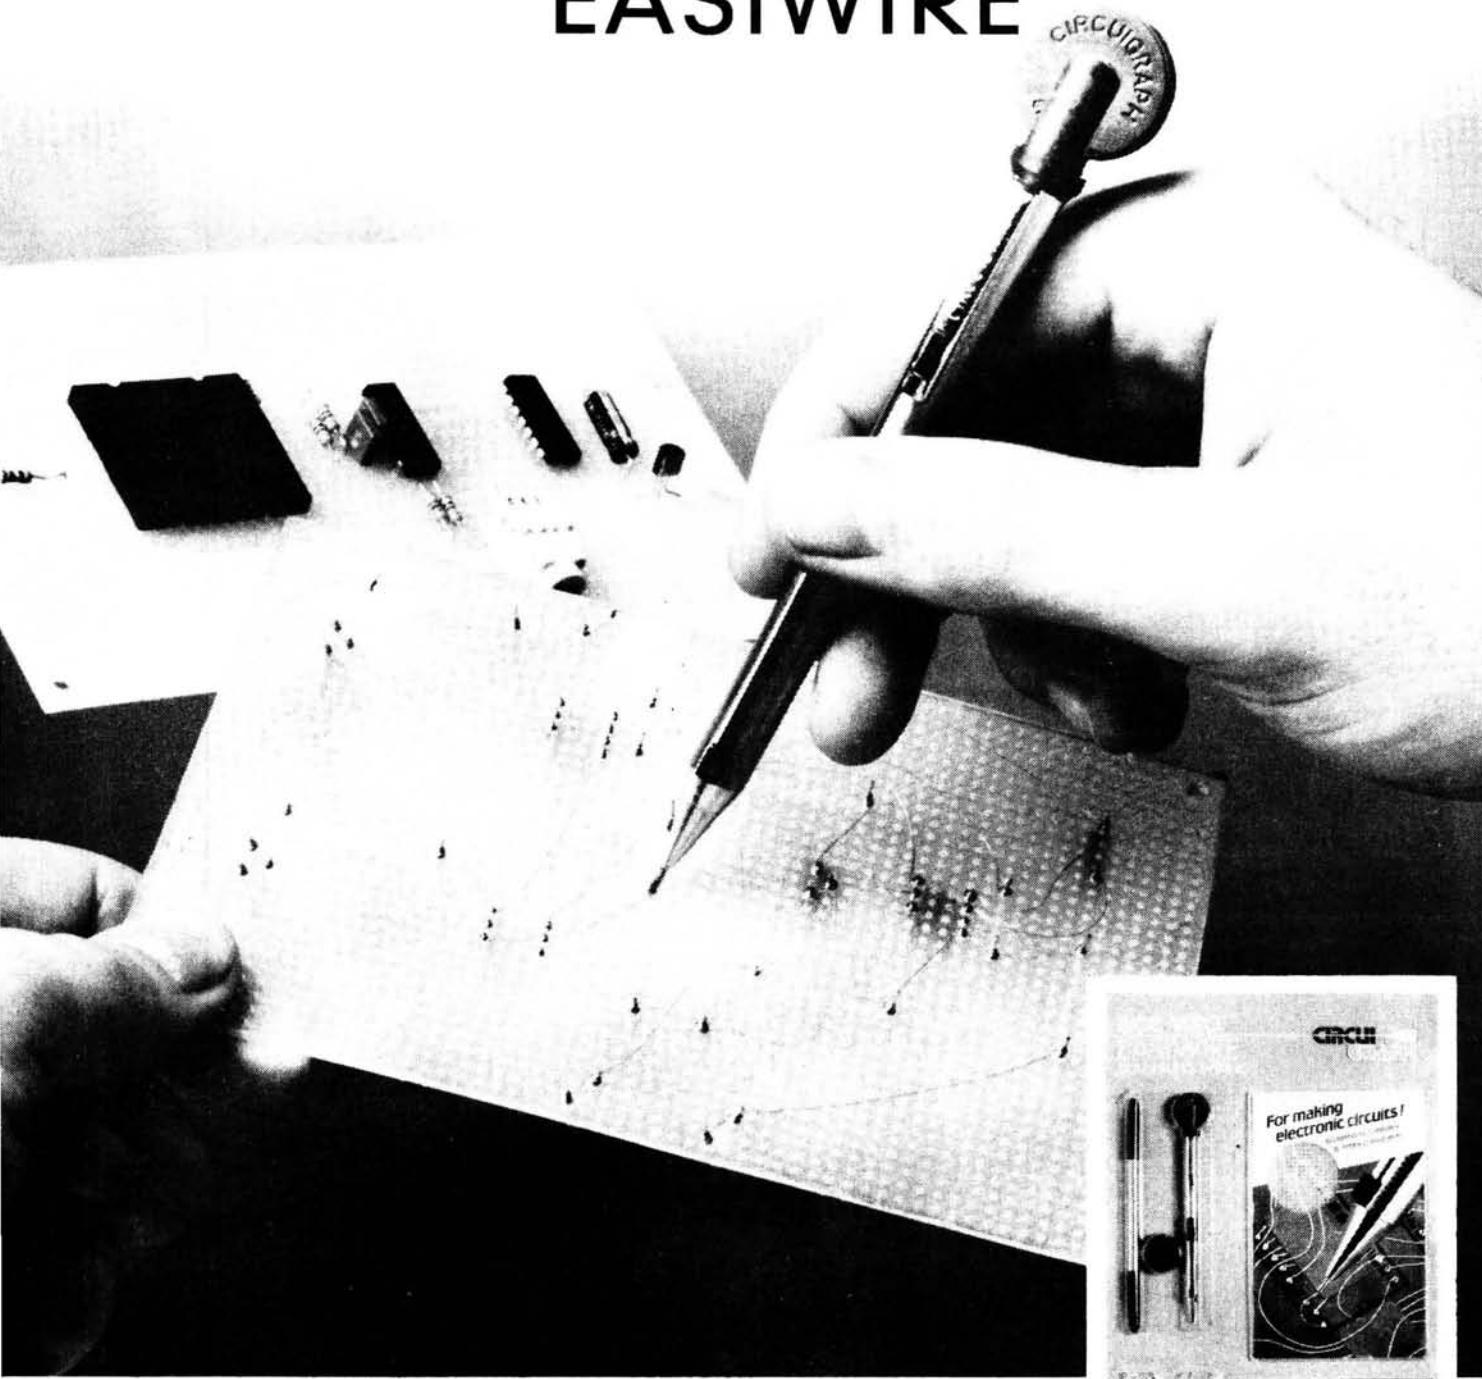

Construct your electronic circuits the new, quick and easy-to-learn way, **WITHOUT** solder: with Circuigraph Easiwire from BICC-VERO

With Easiwire all you do is wind the circuit wire tightly around the component pins. No soldering, no chemicals, no extras, simplicity itself. Circuits can be changed easily, and components re-used.

Easiwire comes in kit form. It contains all you need to construct circuits: a high-quality wiring pen with integral wire cutter, 2 reels of wire, a tool for component positioning and removal, a flexible injection moulded wiring board, double-sided adhesive sheets, spring-loaded terminals and jacks for power connections and an instruction book. Of course, all these components are available separately too.

To take advantage of the special introductory offer, complete the coupon on the right and send it to:

**BICC-VERO ELECTRONICS LIMITED,**  
Flanders Road,  
Hedge End,  
Southampton, SO3 3LG

**VERO**  
BICC ELECTRONICS

[www.americanradiohistory.com](http://www.americanradiohistory.com)



**VERO**  
BICC ELECTRONICS

Please rush me ..... Easiwire kits, retail price £18.-; **special introductory offer £15.-** (includes p & p and VAT).

I enclose cheque/postal order for ..... made payable to BICC-VERO Electronics Limited

Please debit my credit card as follows:



Card Number .....

Expiry Date .....

Name .....

Address .....

.....

Signature .....

or phone 04892 88774 now with your credit card number (24-hour answering service).

**Practical  
Wireless**  
**144 MHz QRP Contest**

*This is to certify that*

**19**

*was placed... in the results  
of the above contest*

**88**

EDITOR, Practical Wireless

by Neill Taylor G4HLX

# Results

## Certificate Winners

<b>Overall Winners</b> <b>Runner-up, leading single operator, leading English station and single-antenna stn.</b>	The Hillbillies	GW4APA/P
<b>3rd place</b> <b>Runner-up single operator</b> <b>3rd placed single op.</b>	Michael J. Ryder	GOCDA/P
<b>Leading fixed station</b> <b>Leading Scottish station</b> <b>Leading Irish station</b>	Hillingdon Amateur Radio Club Lee Parrott Chris Partington	G1HIL/P GOAMU/P GOCLP/P
	Tony Wyn Jones & Tom Jones Galloway Contest Group Paddy Devine & others	GW4VEQ GMOCLN/P EI9FY/P

The sixth PW QRP contest took place on June 12 and, as usual, attracted a high level of low power operation to the 144MHz band. Entries from 120 stations have been received, and this year there are a few changes at the top of the results table. The winners this year are **The Hillbillies**, operating under the callsign **GW4APA/P**, comprising Tony Ashcombe G4APA, Bob Harrison G4UJS, Martin Platt G4XUM and Don Stoker

G1GEY. From the top of Esclusham Mountain in NE Wales, they achieved an impressive lead, aided by their remarkable 104-element antenna array; four 17-element and four 9-element Yagis.

In last year's contest, **Michael Ryder GOCDA/P** set a new record by reaching 4th place, the highest position ever achieved by a single operator. This year he has not only broken that record but really excelled himself: leading the 58 single

operator entrants, he reached 2nd place overall. But that's not all—his station also becomes the leading English station, and gets the title of the leading station using a single antenna (an 11-element Yagi). A quite remarkable performance!

Another record has been broken by the leading fixed station, **GW4VEQ** operated by **Tony Wyn Jones** and **Tom Jones**. At 7th place overall, this is the highest position ever achieved by a fixed station. Tony's newly acquired site on Anglesey certainly has a good take-off, allowing him to work 35 squares despite being only 35 metres above sea level, demonstrating the fact that there's more to a good site than height.

Results of the two leading Scottish stations were very close, and only after careful checking of the logs did the **Galloway Contest Group GMOCLN/P** emerge a whisker ahead to gain the Tennamast Trophy from last year's holders, **GM4CAA/P**. Amongst the entries from EI/GI, the leader was **Paddy Devine EI9FY/P**.

All the leaders mentioned above are certificate winners, as are the 3rd placed group overall, **G1HIL/P**, and the 2nd and 3rd single operators, **GOAMU/P** and **GOCLP/P** (see panel). Certificates also go to the leading stations in each locator square (see list), even if there is little or no competition in the square. We all appreciate the efforts of those in the outlying areas for activating the rarer squares.

Details of the top few single and multi-operator stations are included here, and a summary of the positions of all 120 entrants. The full detailed results list will be sent to all who supplied a stamped addressed envelope with their entries; anyone else requiring a copy should send a large s.a.e. to the Poole offices. I also intend to distribute the list via the packet radio bulletin board network shortly after this issue is published. Look out on your local BBS for a bulletin from G4HLX titled "QRP Contest Results" (use the command L< G4HLX to find it).

## Leading Multi-Operator Stations

Pos.	Name	Callsign	Score	QSOs	Squares	Location	Antenna	a.s.l. (m)	TX/RX
1	The Hillbillies	GW4APA/P	15428	406	38	I083KB	4 x 17Y +4 x 9Y	450	FT-101ZD +μTek TV
3	Hillingdon Amateur Radio Club	G1HIL/P	9139	247	37	I0910Q	4 x 17Y	190	FT-726R
4	Mansfield ARS Club Group	G3GQC/P	6608	236	28	I093EC	2 x 17Y	380	IC-251E
5	Worthing & District ARC	G1WOR/P	6210	230	27	I090TV	2 x 16Y	220	FT-290R
6	Wulfrun Contest Group B	G1WPF/P	6120	204	30	I091SW	2 x 8Y	160	IC-202S
7	Tony Wyn Jones & Tom Jones	GW4VEQ	5180	148	35	I073SG	4 x 8Q	35	TR-751E
8	David Wright & others	G8EOD/P	5122	197	26	I093FK	2 x 15Y	395	FT-290R
9	Neil Underwood & Martyn Wright	G4LDR/P	5100	204	25	I080WX	14Y	275	IC-275E
10	Allstars Contest Group	G0FEH/P	5044	194	26	I093GC	8Y	275	IC-275E
12	R. Thornley & S. Maher	G1NUS/P	4664	212	22	I083XD	2 x 9Y	350	FT-290R

## Leading Single-Operator Stations

Pos.	Name	Callsign	Score	QSOs	Squares	Location	Antenna	a.s.l. (m)	TX/RX
2	Michael J. Ryder	GOCDA/P	9664	302	32	I093AD	11Y	465	FT-290R
11	Lee Parrott	GOAMU/P	4704	224	21	I083WE	10Y	405	IC-290E
16	Chris Partington	GOCLP/P	4176	174	24	I084IG	8Y	550	TR-7010
20	Peter Thompson	G8DDY/P	3432	156	22	I090JP	2 x 19Y	240	IC-271E
21	Dave Iles	GW4XGA/P	3381	147	23	I073XC	4Q	1000	FT-290R
30	Jean Grahame	G1VEN/P	2640	165	16	I092AJ	16Y	255	TR-751E
31	Andy Brewer	G1GMV/P	2584	136	19	I080SQ	8Y	170	FT-290R
33	Tim Raven	G4ARI/P	2261	133	17	I082LB	14Y	430	IC-202S
36	Terry Bruce	G6IAT	2109	111	19	I091TV	2 x 17Y	160	FT-767GX
38	Ron Flemming	G0BNC/P	1872	117	16	I091EU	2/2Q	200	FT-480R
	Tony Crake	G1GVA/P	1872	104	18	I091GI	13Y	275	TR-751E

## Activity

The number of entries was a little lower this year, reflecting less activity on the band during the event, as several entrants noted in their comments: "probably not the usual number of stations active," says G4ARI/P and some others, "at times much of the band was clear," at G4YRY. Some suggested reasons for this, the most popular being, as EI9CAB/P puts it: "the first three hours or so were OK, but maybe everyone went to see the England v. Ireland match in the afternoon". PA3EUS/P, too, notes: "very little activity this side of the channel until the football finished".

Not everyone found it this way, however, and G1OGY was one of those reporting an "apparently larger number of stations competing". Any increase in activity is welcomed in some of the more remote areas, "yes, there is life in IN69!" remarks GOAEA. "2 metres certainly benefits from the increased activity," says G1OEJN, "it is usually very empty, except during openings, in this neck of the woods".

## Weather

In few areas could the weather have been an excuse for not taking to the hills, as we provided the now customary sunshine in most parts of the British Isles. "You once again picked a fantastic day" —G4YFT; "Just what the doctor ordered"—GM3PGV/P. "For the fourth year running I'm nursing a rather sore suntan"—GM0FUN/P. "Had to abandon the contest after 2 hours due to the heat"—GM3NHQ/P.

However, in many parts the sun was accompanied by high winds, which took some groups by surprise when they arrived at their elevated sites. "At about 1300ft. a.s.l. it was difficult to stand," says GW4VVX/P, "the wind noise around the car was louder than the rig". "It blew a gale all day" at G8DDY/P, while EI4FO/P had "a very slow QSO rate because I was preoccupied by the effect of the wind on the beam direction".

Leading Stations in each Locator Square			
Square	Name	Callsign	No. entrants in square
IN69	Colin S. Oakley	GOAEA	1
IN89	Dave Hewitt	GJ8ZRE/M	1
IO52	Thomas J. Foley	EI6BA/P	1
IO63	Paddy Devine	EI9FY/P	2
IO70	Bideford Bay Radio Club	GOJKD	2
IO71	Paul Rees	GW0GPQ/P	1
IO72	John Murphy	EI4FO/P	1
IO73	Tony Wyn Jones	GW4VEQ	3
IO74	Glasgow VHF Contest Group	GM0CGC/P	2
IO75	Steve Hartley	GM0FUW/P	2
IO76	Ochil Hills Contest Group	GM0GDL/P	1
IO77	Sutherland & District Radio Club	GM0IYP/P	2
IO80	Neil Underwood & Martyn Wright	G4LDR/P	4
IO81	Bedwas Tip QRM Generating Team	GW4VVX/P	6
IO82	Tenbury Wells Radio Society	G1TRS/P	5
IO83	The Hillbillies	GW4APA/P	11
IO84	Chris Partington	GOCLP/P	3
IO85	Civil Aviation Authority RS	GM4CAA/P	5
IO86	George McKay	GM4YWS/P	2
IO87	Thomas Harrison	GM3NHQ/P	1
IO88	Caithness ARS Contest Group	GM0CRA/P	1
IO90	Worthing & District ARC	G1WOR/P	3
IO91	Hillingdon Amateur Radio Club	G1HIL/P	15
IO92	Atherstone Amateur Radio Club	G6ARC/P	9
IO93	Michael J. Ryder	GOCLD/P	15
JO94	M. J. B. Overton	G1JDP	1
JO95	Keith Falconer	G1BWJ/P	2
JO00	Galloway Contest Group	GM0CLN/P	2
JO01	SEARS Contest Group	G4RSE/P	13
JO02	Roy Smith	G6GAU	1
JO11	Godfrey Hands	PA3EUS/P	2
JO22	Jaap Nap	PE1JVH	1
JO32	Dragon Slayers QRP Group	PE1MHO	1

## Antenna Problems

Problems with erection of antenna masts seem to have been common, in many cases, of course, caused or at least compounded by the high winds. At G1GVA/P "a huge gust actually bent the pole whilst struggling with the guy ropes". GW0GPQ/P made a classic mistake—after much frantic effort to get the mast up they discovered they'd forgotten to connect the feeder to the Yagi at the top! The antenna at PE1MHO developed a fault after only 10 minutes, but the winds prevented getting it down for repair. The beam at

G1GVA/P "must have had to go up and down seven times before a galaxy of faults were cleared".

A more serious collapse at G1WPF/P, "when attempting erection, the base plate left the ground and the aerials took a nose dive". Although it may be easy to laugh at this misfortune now, experience at G6YZR/P reminds us that an untamed antenna mast can be a real hazard: "the wind got up, hindering the erection of our mast . . . just as we had it half way up, the foot of the mast slipped and hit an operator in the face", which led to an immediate visit to the hospital.

## Practical Wireless 144MHz QRP Contest 1988

Pos.	Callsign	Points									
1	GW4APA/P	15428	31	G1GMV/P	2584	61	G4YFT	1111	91	G1NTW/P	540
2	GOCDA/P	9664	32	GW1HGV/P	2560	62	GM4YWS/P	1078	92	G1PVT	528
3	G1HIL/P	9139	33	G4ARI/P	2261	63	GOJKD	1053	93	G6GAU	518
4	G3GQC/P	6608	34	G4ZTR/P	2166	64	G1OGY	1044	94	PE1EWR	518
5	G1WOR/P	6210	35	G3RR/P	2112	65	GW0IIW/P	994	95	GW1ZFX	516
6	G1WPF/P	6120	36	G6IAT	2109	66	G7AAB/P	936	96	G3SVC/P	513
7	GW4VEQ	5180	37	G4SLH/P	1980	67	G4FOX/P	912	97	GM4PGV/P	507
8	G8EQD/P	5122	38	G0BNC/P	1872	68	GM0GCG/P	897	98	G1EHF	468
9	G4LDR/P	5100	39	G1GVA/P	1872	69	G6YZR/P	882	99	G6ZIM/P	460
10	GOFEH/P	5044	40	G4CDD/P	1824	70	G1YIY	871	100	PE1MHO	420
11	GOAMU/P	4704	41	G4XQW/P	1785	71	G1MSS	871	101	G1JDP	418
12	G1NUS/P	4664	42	GM0IYP/P	1728	72	G4ZON/A	871	102	GOACK	410
13	G6ARC/P	4576	43	G4XOM/P	1665	73	EI6BA/P	840	103	G2DHV/P	352
14	G3VRE/P	4512	44	GW3POM/P	1635	74	GW1MVL	825	104	EI9CAB/P	351
15	G4ITR/P	4284	45	G1STH/P	1521	75	GOEWN	819	105	G1NMF	350
16	GOCLP/P	4176	46	G0FHR/P	1508	76	G4PSO/A	819	106	PE1JVH	288
17	G10RC/P	3611	47	G1BWJ/P	1470	77	PA3EUS/P	817	107	GM4UYZ	264
18	G1TRS/P	3540	48	G4ZUN	1458	78	G0GBI/P	793	108	GJ8ZRE/M	260
19	G3UAX/P	3444	49	GM0FUW/P	1420	79	G0HXO/P	780	109	G6YLW	252
20	G8DDY/P	3432	50	GM0CRA/P	1407	80	G4TVK	770	110	GOIEQ	228
21	GW4XGA/P	3381	51	G2HR	1364	81	G0BPI/P	756	111	GM3NHQ/P	209
22	GW0GPQ/P	3358	52	G8DBY/P	1320	82	G7BDY/P	748	112	GM1AYG	198
23	GOEVV/P	3336	53	G4OEU/P	1280	83	G4BZP/P	715	113	G1AMX	180
24	G4RSE/P	3190	54	EI9FY/P	1276	84	G6JMN/P	640	114	G1YCA	155
25	GW4VVX/P	3180	55	G1UXA/P	1248	85	G3BXF	605	115	GOEJN	152
26	GM0CLN/P	3164	56	EI04FO/P	1218	86	G8JTD/P	594	116	GOAEA	133
27	GM4CAA/P	3120	57	GW6VAT/P	1207	87	G4SSD	583	117	G6XAL	128
28	GM0GDL/P	2782	58	G4WIK/P	1204	88	G6UUO/P	583	118	GM1ZVJ	120
29	G4UHF/P	2680	59	GMOAEE/P	1188	89	GOEVT	572	119	GM1GGP/P	119
30	G1VEN/P	2640	60	G4YRY	1136	90	G1LHO	572	120	G1UOW	30

Checklogs gratefully received from G2HIF and G6DZH

Practical Wireless, November 1988

## Conditions

Despite being the middle of the Sporadic-E season, most stations experienced nothing special in terms of propagation. Typical descriptions of conditions were "very poor, not one French station heard"—G1WPF/P, "terrible!"—GMOAEE/P.

However, most Scottish stations and some northern England stations enjoyed an opening into Scandinavia. "Only one English station was heard" at GMOCRA/P, "but many OZ, LA, and SMs were heard". "Our first contact was an LA" reports GM0IYP/P, "then we worked SMs and OZs". For some, it all happened too late: "after the contest, during the drive home to Northumberland, the band was wide open with SM, OZ, LA, all/M"—GOEVV/P.

In fact the opening lasted most of the day, and 12 of the 15 GM stations entering have an LA in their log. LA6HL was the most worked of the DX, the earliest contact being at 0905UTC, the latest at 1228. Some northern G stations (in IO85 and IO95) were still working SMs and OZs as late as 1618UTC, and as noted above, the DX was still being heard after the end of the contest.

## Here and there

Grumbles about quality of signals or operating standards were very few this year. "Signals, without exception, seemed very clean," says G6ARC/P, a comment echoed by several others. G1TRS/P noted one GW station who didn't seem to be keeping a check log: "they called us five times after working us—is this a record?" Maybe, but in the past an entry with less than 15 contacts was submitted containing a duplicate, which also takes some beating.

Some novel station set-ups were in use; G1STH/P were using a horse-box as a mobile shack, while GM0IYP/P claim to have had "the most powerful rotator in Britain... a 200 h.p. four-wheel-drive tractor and high-sided dung trailer", to which the 12 metre mast was fitted (see photo). GM0IYP/P also express a common sentiment among Scottish stations: "one of our new members asked 'do they have 2m in England as I have not heard any yet?'—the answer is yes they do, but they do not have rotators and leave their antennas permanently pointing south".

General remarks about the contest follow the themes set by GM4PGV/P: "a very fine contest, it has become the highlight of our year"; G6ARC/P: "again we were very pleased with what could be achieved with 2.5 watts"; and G3GQC/P: "we are eager for the next one". A few constructive criticisms were received, but were generally self-cancelling, e.g. one call to reduce the event to 6 hours in length, another to extend it to 24 hours.

The event continues to attract newcomers to contesting, as was originally hoped, for example G4FOX/P: "our first attempt at v.h.f. contest working and everyone had a very enjoyable day". G4YFT tried a single operator entry for the first time, but found it all rather hard going; "this is the first year I have done the contest single handed, and the last... next year it's back to multi-op".

Most entrants like to look forward to the next event with some improvements to their station being planned, like G1LHO, who "will be back next year with a few more frills", or at a better location, like



Antenna inspection at GM4CAA/P on Lowther Hill



The GMOCRA/P team on Ben-a-Chieft



GM0GDL/P ready for the "off", on Ben Vorlich



Waiting for the G1STH/P mobile shack to arrive on Billinge Hill



GM0IYP/P and their dung-trailer on Beinn-a-Bhraraigdh, Sutherland



G7BDY/P, the "Propagating Pixies", in Devon



G0FHR/P, the "Raving Mad Contest Group", on Firle Beacon in East Sussex



Peter Thompson G8DDY/P on Shanklin Down, IoW

G1YCA, "here's to next year, hopefully sat on top of the hill just behind me". Although some entrants have suggested running more than one contest in a year, or an additional event on another band, there are already a wide range of v.h.f./u.h.f. contests being organised by the RSGB, so

those who have tasted contest operation for the first time, and have enjoyed the experience, should easily find something to suit them. But do come back on the air for the next *Practical Wireless* 144 MHz QRP Contest, which is planned for Sunday 11 June 1989.

## **NEW PA 6 METRE BEAMS**

Introducing a new range of high quality 6 metre beams which are up-gradable. You can upgrade from a 3 Ele-4 Ele, 3 Ele-5 Ele or 4 Ele-5 Ele.

All aerials are made of high quality aluminium and come complete with mounting brackets to take up to a 2" mast and with easy to follow assembly instructions.

	<i>Price Inc. VAT</i>	<i>P&amp;P</i>
PA6M/3 3 Element Beam — Length 7' 4"	£32.00	£4.00
PA6M/4 4 Element Beam — Length 11'	£36.00	£4.00
PA6M/5 5 Element Beam — Length 13' 6"	£40.00	£5.00
<b>UPGRADE KITS</b>		
3 Ele to 4 Ele	£4.60	£3.00
3 Ele to 5 Ele	£9.20	£3.00
4 Ele to 5 Ele	£4.60	£3.00

### **TRADE ENQUIRIES WELCOME**

**KENWOOD**



TS-680S HF Transceiver 160m to 10m and 6 metres. Also includes 500kHz to 30MHz general coverage receiver.

**TS680S £985.00 Inc. VAT**

	<i>P &amp; P</i>
TS940S Top of the range HF Transceiver.	1995.00 (10.00)
TS440S HF bands transceiver with general coverage receiver.	1138.00 (10.00)
TS140S HF Transceiver 160-10m with general coverage receiver.	862.00 (10.00)
AT440 Automatic ATU 160-10m fits inside TS940S.	244.88 (5.00)
AT440 Internal automatic ATU for TS440S 80-10m.	144.82 (5.00)
PS50 Heavy duty PSU for TS440S.	222.49 (10.00)
PS430 Mains PSU for TS140S with built in fan.	173.78 (10.00)
AT230 All band ATU and power meter.	208.67 (10.00)
SP230 External speaker unit with switched filters.	66.49 (10.00)
TL922 160-10m 2KW linear.	1495.00 (10.00)
LF30A HF Low pass filter 1KW rating.	32.26 (3.00)
YK88CN CW 500Hz for TS430/440 TS530/830.	46.08 (1.50)
YK88SN CW 270Hz for TS430/440 TS530/830.	54.64 (1.50)
YK455C1 CW 500Hz for TS140S.	46.74 (1.50)
TS711E 2M Base station multimode transceiver 25W.	54.05 (1.50)
TR751E NEW 2M multimode mobile fixed station trans.	898.00 (10.00)
TR851E NEW 70cms multimode mobile fixed transceiver.	599.00 (7.00)
TM221ES NEW 2M FM mobile transceiver 45W.	699.00 (7.00)
TM421ES NEW 70cms FM mobile transceiver 35W.	317.30 (7.00)
RC10 Remote controller/handset for TM221/421ES.	352.84 (7.00)
SP40 Mobile speaker unit for most models.	169.00 (4.00)
TM721E 2M/70cms Dual band FM mobile fixed Full Duplex. 2M = 45W, 70cm = 35W.	21.06 (2.50)
TH25E NEW 2M FM compact handheld transceiver.	699.00 (7.00)
TH45E NEW 70cms FM compact handheld transceiver.	258.00 (5.00)
TH205E 2M handheld transceiver with LCD readout.	296.00 (5.00)
TH215E 2M handheld transceiver with keypad entry.	215.26 (5.00)
TH405E 70cms handheld transceiver with LCD readout.	252.13 (5.00)
TH415E 70cms handheld transceiver with keypad entry.	273.18 (5.00)
HSS Deluxe headphones for all Kenwood equipment.	298.85 (5.00)
HS6 Ultra light deluxe headphones.	37.54 (3.00)
HS6 Ultra light deluxe headphones.	24.36 (3.00)

### **RECEIVERS**

	<i>P &amp; P</i>
Kenwood R5000 HF general coverage receiver.	875.00 (10.00)
Kenwood R2000 HF general coverage receiver.	595.00 (10.00)
Kenwood VC20 VHF converter for R5000 108-174MHz.	167.21 (3.00)
Kenwood VC10 VHF converter for R2000 118-174MHz.	161.94 (3.00)
Icom IC-R71E HF general coverage receiver.	855.00 (10.00)
Yaesu FRG8800 HF general coverage receiver.	639.00 (10.00)
Yaesu FRV8800 VHF converter for FRG8800 118-175MHz.	100.00 (3.00)
HF125 30Khz to 30Mhz general coverage receiver.	375.00 (10.00)
Icom IC-R7000 VHF/UHF scanner all modes 25-2000MHz.	989.00 (10.00)
AR2002 VHF/UHF scanner 25-550Mhz and 800-1300Mhz. ( <b>Free Discone</b> )	487.30 (5.00)
Kenwood RZ1 wideband receiver 500Khz-950Mhz.	465.00 (5.00)
R537S Airband portable receiver 118-136Mhz.	69.55 (3.00)
R535 VHF/UHF airband receiver. LCD display.	249.00 (5.00)
WIN-108 synthesised VHF airband receiver 108-136Mhz	175.00 (3.00)
Black Jaguar MKIII handheld VHF/UHF scanner. Covers most of the UHF military band.	235.00 (5.00)

### **NEW**

AR800E VHF/UHF handheld scanner covers 75-105Mhz, 118-174Mhz, 406-495Mhz and 830-950Mhz. Comes complete with Bell clip, rechargeable battery pack, mains charger and VHF and UHF helical.	199.00 (3.00)
AR900 VHF/UHF handheld scanner covers 108-174Mhz, 220-399Mhz and 830-950Mhz with 100 memory channels.	P.O.A. (3.00)
AR3000 Ultra wideband receiver. Covers 100Khz-2036Mhz all modes, 400 memory channels, high speed scanning at 20 channels per second. <i>This radio is due in October-November</i>	Approx. 800.00 (5.00)

\*\*Please send stamp addressed envelope for further details\*\*

### **ICOM**

	<i>P &amp; P</i>
IC-781 All mode general coverage 99 memories 150W. Includes internal ATU, PSU & CRT display.	4500.00 (10.00)
IC-761 HF transceiver with general coverage RX. 100W. Includes internal ATU and PSU.	2459.00 (10.00)
IC-751A HF transceiver with general coverage RX. 100W.	1500.00 (10.00)
IC-735 HF transceiver with general coverage RX. 100W.	979.00 (10.00)
IC-575 Multimode 6M/10M base station. 10W.	1042.00 (10.00)
IC-2GE NEW 2M FM handportable. Ultra compact.	265.00 (5.00)
IC-290D 2M multimode mobile. 25W.	559.00 (5.00)
IC-275H 2M multimode base station. 100W. Req. PSU.	1039.00 (10.00)
IC-4GE NEW 70cms FM handportable. Ultra compact.	299.00 (5.00)
IC-490E 70cms multimode mobile. 10W.	625.00 (7.00)
IC-32E NEW 2M/70cms handportable. Full duplex.	399.00 (5.00)

### **MISCELLANEOUS**

HC-266 2M to 6M transverter 10W output.	179.00 (5.00)
PK-232 Terminal unit RX/TX of Packet, AMTOR, RTTY, CW, ASCII, FAX and RX also NAVTEX.	269.95 (5.00)
IBM driver software for PK232.	19.95 (2.50)
BBC-B driver software for PK232.	35.00 (2.50)
CBM-64 driver software for PK232	69.00 (2.50)
PK-88 Budget priced packet radio terminal.	109.95 (4.00)
IBM driver software for PK88.	19.95 (2.50)
CBM-64 driver software for PK88.	69.00 (2.50)
BBC-B driver software for PK88.	35.00 (2.50)
AH-7000 Wideband Discone antenna 25-1300MHz.	82.00 (4.00)
Revcone wideband discone 50-550MHz.	31.50 (4.00)
G5RV Full size 102'.	16.75 (3.00)
G5RV Half size 51'.	14.25 (3.00)
HB9CV 2 metres.	3.95 (3.50)
HB9CV 70cms.	3.95 (3.00)
HB9CV 6 metres.	12.95 (5.00)
Daiwa MR750E Heavy duty rotator. Can have up to 4 motors.	254.10 (7.00)
Yaezu G600RC Heavy duty rotator.	219.00 (7.00)
Yaezu G400RC Medium duty rotator.	169.00 (5.00)
Yaezu G400 Medium duty rotator.	139.00 (5.00)
KC038 Lower mast clamps for the G600/400 range.	17.45 (3.00)
KS065 Rotary bearing for mast or Tower mounting.	29.95 (3.00)
Lightweight VHF rotator.	47.00 (5.00)
BNOS 12.5E 13.8v 5 amp power supply.	57.50 (4.00)
BNOS 12-10E 13.8v 10 amp power supply.	97.50 (4.00)
BNOS 12-20E 13.8v 20 amp power supply.	132.25 (5.00)

**AUTHORISED AGENTS FOR KENWOOD, ICOM & YAESU. FULL SERVICE FACILITIES AVAILABLE**

**SPEND UP TO £1,200 INSTANTLY WITH A PHOTO ACOUSTICS LTD. CREDITCHARGE CARD — APPLY FOR DETAILS**

**PART EXCHANGE WELCOME, ASK FOR KERRY G6IZF OR ANDY G4YOW**

**RETAIL SHOWROOM OPEN TUESDAY-FRIDAY 9.30-5.30, SATURDAY 9.30-4.30**

Goods normally despatched within 24 hours. Please allow 7 banking days for cheque clearance. Prices correct at time of going to press — E&OE

**P  
H  
O  
T  
O  
A  
C  
O  
U  
S  
T  
I  
C  
S**

# The EEC EMC Directive on Electromagnetic Compatibility

By Nick Foot\*

*At long last legislation in the UK is going to seriously address the problems of TVI, BCI and all other types of interference which are felt severely by transmitting radio amateurs among others. The most significant legislation relating to radio interference ever to be invoked in the UK is being forced through at the moment by the Common Market. This legislation, the impact of which has not yet been appreciated by industry, is due to become mandatory at some stage between January 1990 and the implementation of the "Open European Market" in January 1992. This impending legislation is known as "The EEC Directive on EMC".*

What is the directive? The directive, the fine detail of which is still being discussed, states simply that after the implementation date

*No equipment placed on the market may cause interference or be interfered with.*

This all-embracing statement is the heart of the directive and the rest of it then concentrates on the scope of the equipment covered by it and the detail of how it will be implemented.

The directive applies to all equipment using electricity to function (other than motor vehicles which are covered by separate legislation). This has been interpreted in the UK in its broadest meaning and it is intended to apply it to all electrical and electronic equipment ranging from children's toys through domestic appliances to industrial plant and mainframe computers. It applies to battery powered equipment, mains powered equipment and all engine-driven equipment other than vehicles. A comment made at a recent conference held on the directive was that "if it functioned by the movement of electrons" then the directive was applicable.

The proposed method of implementation is to allow manufacturers to satisfy themselves that their products would not cause interference or be interfered with. This could be done at the manufacturer's choice by means of testing products to interference specifications or by theoretical analysis. The DTI (and its corresponding equivalents throughout the EEC) would be free to ask manufacturers for proof

that this had been done and could ask to see the test results or the analysis. If it is subsequently found that the interference from or to products is unacceptable manufacturers can be forced to withdraw their product from the market.

### Specifications

This is where the whole issue starts to get cloudy. The stated intention is to have common standards throughout the Common Market and for equipment which is certified as acceptable in any EEC country to be freely marketable throughout the EEC.

The stated intention is for a master interference specification to be produced as an 'EN' document (an EEC Standard) and for all the member countries to produce their own specifications aligned with this. This will mean that there will be a British Standard produced which will be identical with a VDE document in Germany and the corresponding standards bodies in all the member countries will have identical documents.

This infrastructure of documents has not yet been implemented and with the speed that international and national committees work at it is unlikely to be produced quickly. This means that each country will have to work to their existing standards as an interim measure. These are reasonably similar in many cases as they are all derived from CISPR (International Special Committee on Radio Interference) standards. At the moment, however, there are significant national variations.

The current UK documents which are most relevant are BS 800, BS 6667 and BS 6527. One of the areas of concern is that some of the specifications, such as BS 6667 which applies to the susceptibility of equipment, have several sets of limits which are graded depending on the environment equipment is expected to operate in. This standard is aimed at industrial equipment and there are no guidelines provided as to which limits to use for domestic equipment. My own feeling is that it should be the most severe ones as stray r.f. from radio amateurs can be at much greater levels than interference experienced in the industrial environment. The frequency range covered by this standard is limited to 27MHz and above as it is derived from a standard produced by SAMA (the Scientific Apparatus Manufacturers Association) and was intended to protect process control equipment from radiation from walkie talkies. As radio amateurs know only too well there are plenty of breakthrough problems occurring at frequencies below 27MHz!

### Implications for the Radio Amateur

There are good and bad implications for radio amateurs in this forthcoming legislation. The good news is that all electronic equipment will at last be designed to withstand some levels of ambient r.f. near it and will hopefully

\* Nick Foot is the EMC Test Manager at AQL Ltd's NAMAS Accredited EMC Test Facility and can be contacted on 0202 861175

# NORTH WALES RADIO RALLY AND ELECTRONICS FAIR

Second two day event to be held in North Wales  
at the

**ABERCONWAY CONFERENCE CENTRE,  
LLANDUDNO**

on

**Saturday/Sunday, 5th/6th November 1988  
11.00 am – 4.30 pm**

Bring and Buy at ground floor level in the new Arcadia Theatre, raffles, snack bars etc.

146 stalls including RSGB Book Stall, many Club Stands, Computers, Components, Radio Electronics, 27/234MHz, Satellites, Data Transmission, TV and lots more.

Bring the family for the weekend. Ample accommodation at low winter rates. One hour from Manchester via new dual carriageways all the way to rally.

**Ample Free Parking. Talk-in on S22 and SU8**

**Admission £1.00**

**(OAP 50p. Children under 14 free)**

have been tested to ensure that interference does not occur. The potential problem of this aspect is whether the specification test levels will be adequate to represent the environment that exists near high power amateur installations. Measurements in properties adjacent to radio amateurs have shown that field strengths in excess of 10V/m (volts per metre) are commonly produced. Many of the specification levels that have been proposed are lower than this (the levels proposed in the CENELEC document on interference protection for domestic equipment which has been circulated in draft form are 1.8V/m).

The bad news is that all commercially manufactured amateur equipment will have to meet standards for interference emissions for the first time ever in this country. There are currently no standards proposed specially for amateur transmitters and receivers and, if this equipment is tested to the general interference specification limits (even with a dummy load fitted and a concession at the operating frequency as it is permitted to radiate there), it is anticipated that it will fail severely on things like harmonic emissions and case radiation. This could have considerable cost implications and might force some black boxes off the market completely as the unit could have to be redesigned to achieve the required limits and this may not be cost effective for the manufacturers.

Fortunately this legislation applies only to commercially produced equipment and does not apply to home construction. The increased prices may lead to a revival in home construction which may be a good thing for amateur radio.

## What Must Manufacturers Do?

All electrical and electronic equipment manufacturers must start to consider EMC in their product designs now as equipment that is currently on the drawing board may have to meet the legislation by the time it reaches the market. If they do not have sufficient expertise within their design teams they must seek outside help from EMC test houses or consultants, as to have a product removed from the market could be very costly. Interference control needs to be designed into equipment if it is to be achieved cost effectively.

This impending legislation will affect all manufacturers of electrical and electronic equipment throughout industry, as the legislation will apply across the board to all electrical equipment.

## What Happens Next?

The current state of the directive is that all the European national authorities are negotiating on the final form of the directive. In the UK we are repre-

**South Midlands Communications**

**SMC**  
The Communicators

## B E W A R E

NOT ALL **YAESU** RADIOS CURRENTLY BEING OFFERED FOR SALE BY SOME DEALERS HAVE THE BACK UP OF YAESU'S DISTRIBUTION NETWORK. SETS WITH JAPANESE MANUALS AND WARRANTY CARDS SHOULD BE AVOIDED! YAESU'S FACTORY BACK UP AND SPARES SERVICE IS NOT AVAILABLE IN THE U.K. FOR THESE SETS.

— "REMEMBER, A FEW POUNDS SAVED NOW COULD COST YOU DEARLY IF YOUR SET SHOULD EVER GO WRONG" —

DETAILS OF AUTHORISED DEALERS AVAILABLE ON REQUEST

**YAESU** UK SOLE DISTRIBUTOR

**SOUTH MIDLANDS COMMUNICATIONS LIMITED**

HEAD OFFICE: S M HOUSE, SCHOOL CLOSE, CHANDLERS FORD INDUSTRIAL ESTATE, EASTLEIGH, HANTS  
TEL: (0703) 255111 TLX: 477351 SMCOMM G  
FAX: (0703) 263507

sented by the DTI and they are attempting to increase industry's awareness of the impending legislation. Various UK trade associations such as BEAMA are feeding information from their members to the DTI. The engineering institutes such as the IERE are also doing their part to increase awareness of the directive and its implications.

There is great concern being expressed about the width of the applicability of the directive in its present form and the short timescales involved. Particular concern is being expressed that the specifications and limits to be met are still not defined. Manufacturers aware of the potential effects are worried about cost implications on their products while the majority of the industries that will be affected are in blissful ignorance of the problems ahead. Test Houses involved in EMC are investing heavily in new equipment to cater for the anticipated demand for interference testing, and the competition to find and employ engineers experienced in interference control is enormous.

The next step is up to the DTI and the EEC, but hopefully a lot of the grey areas will have been defined shortly and the implementation of the directive will be properly defined. In the meantime it is essential that manufacturers consider interference aspects of all new designs if they wish to remain in business after 1992.

# PW REVIEW



*Are you confused by the never ending stream of complicated transceivers that are appearing on the market? If so the Yaesu FT-747GX could well be a sight for sore eyes! Mike Richards G4WNC checks out the on-air performance.*

The FT-747GX from Yaesu is a very compact multi-mode transceiver featuring 100 watts p.e.p. output on all the current h.f. amateur bands, plus a general coverage receiver with a wide range of 100kHz to 30MHz.

The first thing I noticed when I collected the FT-747GX was its weight, at a mere 3.3kg it's extremely light. This weight saving over previous models seems to be due to the increased use of plastics, but despite this I thought the styling of the FT-747GX was very attractive.

## The Connections

The accent throughout the rig is on simplicity and the external connections are no exception. The power requirements are the normal 13.5V d.c. at a maximum of 19 amps when transmitting at full power. The p.a. module in the FT-747GX has actually been designed to cope with a continuous output of 100 watts for up to 30 minutes, ideal for the RTTY or SSTV enthusiast. You will obviously have to ensure that your power supply can take this loading. If you are buying a Yaesu power unit then the FP-757HD heavy-duty supply will be required. The power supply connection is via the supplied 3m long red and black lead which is fitted with an in-line fuse holder and 20A fuse. The connection to the rig is by a standard Yaesu 4-pin plug and socket, the other end of the cable being left for the user to terminate.

The antenna connection is also very straight forward comprising a single SO-239 socket on the rear panel. The p.a. stage of the FT-747GX includes protection against poorly matched antennas and gives about a 25 per cent power reduction with a 3:1 s.w.r. the output will of course reduce further with greater mis-matches.

As the FT-747GX features reception from 100kHz to 30kHz you may find that you need an external antenna switch so that an alternative antenna system can be selected when listening to the lower frequencies. My own antenna system comprises a nest of dipoles for 3.5, 7.0, 14, 28MHz with the combination being workable, via an a.t.u., on all the h.f. amateur bands. The only problem is that balun used precludes operation below about 1.6MHz. My answer to this situation is to use an active antenna for reception of lower frequencies, though an alternative would be to short-out the inner and outer of the feeder at the shack and use that as part of the antenna.

The rear panel connections on the FT-747GX have been well thought out and employ standard plugs and sockets. A 4 to 16Ω external speaker can be connected via the 3.5mm jack which automatically disconnects the internal speaker. For the c.w. operator there is a 6.3mm standard jack for the key, the maximum voltage and current at this point is +13V and about 1mA, which means that virtually any key or keyer can be connected without problems.

The data mode operator is well

catered for on the FT-747GX with the p.t.t., audio output and switched +13V lines available on phono sockets for external use. The provision of a switched +13V is rather a novelty and means that the packet TNC or RTTY terminal unit can be powered-up with the rig. The actual current available from this socket is quoted as 200mA which should be adequate. My only grumble at this point is that the audio input, i.e., microphone socket, which is needed in order to transmit packet, RTTY, etc., is only available from the front panel which can make the connections rather untidy.

Other facilities on the rear panel include an external a.l.c. for use with linear amplifiers, and an 8-pin DIN socket carrying band data information for use with Yaesu's FC-1000 automatic a.t.u. and FL-7000 linear amplifier. The final facility on the rear is a 6-pin DIN socket marked CAT which enables most of the operation of the transceiver to be controlled by a personal computer. The protocols used for this facility conform to the standard established by Yaesu.

## The Controls

One of the first things that strikes you about the front panel layout is the sheer simplicity, which is quite refreshing these days. Centre position of the front panel is taken by the large (46mm dia.) rotary tuning knob and the well lit l.c.d. The tuning action is of the stepped type with 50 steps per revolution.

tion. My first thoughts were of disappointment at the poor feel of this control, probably because I was brought-up on silky smooth Eddystone dials! I must confess though, after using the FT-747GX for a while, I soon became accustomed to the feel and accepted that it wasn't really a problem.

One notable and welcome change on the FT-747GX is that the speaker is mounted on the front panel facing forwards, rather than the more usual of on the top panel facing up! This change means that the internal speaker is really quite useful and there is no real need to use an external speaker.

As can be seen from the photographs, the front panel layout of the FT-747GX has the right-handed user very much in mind, with all the main operational controls placed to the right of the tuning dial. Being right-handed myself I found this layout to be very convenient and easy to use.

The four rotary controls have been grouped according to standard practice with the volume/squelch and mic gain/drive mounted in concentric pairs.

The various tuning and memory options are selected using eight of the nine buttons immediately to the right of the tuning knob with the remaining buttons used to select: mode, narrow c.w. filter, attenuator, noise blanker and manual transmit switching.

The only two buttons left are those just above the tuning dial, these are directly connected with frequency selection, one being to lock the dial while the other operates the clarifier.

## Tuning

Despite the simple appearance of the FT-747GX, Yaesu have not compromised on the range of tuning options. The most obvious technique is to manually tune using the main tuning knob. As mentioned earlier this is a stepped control with some 50 steps per revolution, the size of these steps being dependent on which mode you are using. The actual steps are 25Hz for s.s.b./c.w. 1kHz for a.m. and 5kHz for f.m. These step sizes are fine for normal use though the RTTY/packet operators will note that the 25Hz minimum step is about the largest that can be accepted for these narrow shift modes. To aid rapid tuning across a band these tuning steps can be increased to 2.5kHz, 10kHz and 12.5kHz respectively. This change is achieved by pressing the FAST button and just to make sure you notice, the word FAST appears on the display. As with most of the push-buttons on the FT-747GX, the effect is reversed with a second press of the button.

Band selection on the FT-747GX is rather different as you don't actually step from one amateur band directly to the next, but just change to a super fast tuning mode. This change is effected by pressing the BAND button, whereupon the main tuning knob step size increases to 500kHz giving 25MHz per

revolution! Although normal tuning can be restored with a second press of this button there is an internal five second timer which forces a return to normal tuning if the main control is untouched during this period. Although unusual, this technique was actually very effective and made it very easy to rapidly change frequency over a very wide range. It also meant that you could change from amateur bands to short wave listening very easily. You will no doubt be pleased to hear that the FT-747GX will only transmit within amateur bands, so there is no risk of accidentally transmitting out-of-band!

## Memories

No modern microprocessor rig would be complete without a selection of memories and the FT-747GX is no exception. There are a total of twenty memories provided (twenty-two if you include the two v.f.o.s) and each of these can store not only the operating frequency, but the mode as well. Storing frequencies in memory has been made very straightforward, requiring first the selection of a memory and then a single press of a button to transfer the current v.f.o. mode and frequency to the selected memory!

As an added bonus, these memories will also store split frequency operation, if that is the current mode. The only exception is that memories 18 and 19 can only store single frequencies and modes.


In addition to the simple storing and recall of frequencies, the FT-747GX has a scanning facility which enables the memories to be automatically scanned for activity. This scan is activated by pressing the UP or DOWN buttons on the microphone whilst in memory mode. The strength of signal that will stop the scan is determined by the setting of the squelch control which

gave a wide range of control. A very useful feature of the scan is that you can exclude any number of memories and so tailor the operation to, for example, just QRP frequencies.

Once a signal of sufficient strength is detected, the scan stops for approximately five seconds, if you want to stop the scan you press the UP or DOWN buttons a second time. The overall operation of the memories was very good and enabled very rapid band and mode changing which, when combined with the scanning facilities, were very useful for searching out activity on some of the more interesting bands.

Last, but not least, the FT-747GX has a priority channel facility. This particular implementation lets you automatically monitor any single memory channel for activity every four seconds whilst using either of the two v.f.o.s. This can be useful if you want to keep a check on a calling frequency whilst chatting to a friend on a different band. Once the FT-747GX has detected a signal on the priority channel that exceeds the squelch threshold, it switches to the priority channel for five seconds and then reverts to the normal operating frequency. If you want to stay on the priority channel, all you have to do is momentarily press the p.t.t. switch on the microphone during this five second period.

In these days of crowded bands and DX pile-ups, it is often necessary to use different transmit and receive frequencies (known as split frequencies). Yaesu have not forgotten this and the FT-747GX is equipped with dual v.f.o.s to handle this situation. Along with most modern rigs, it doesn't actually have two v.f.o.s, but rather two dedicated memories. This is a better system because these two memories are able to conveniently store the operating mode as well as the frequency.

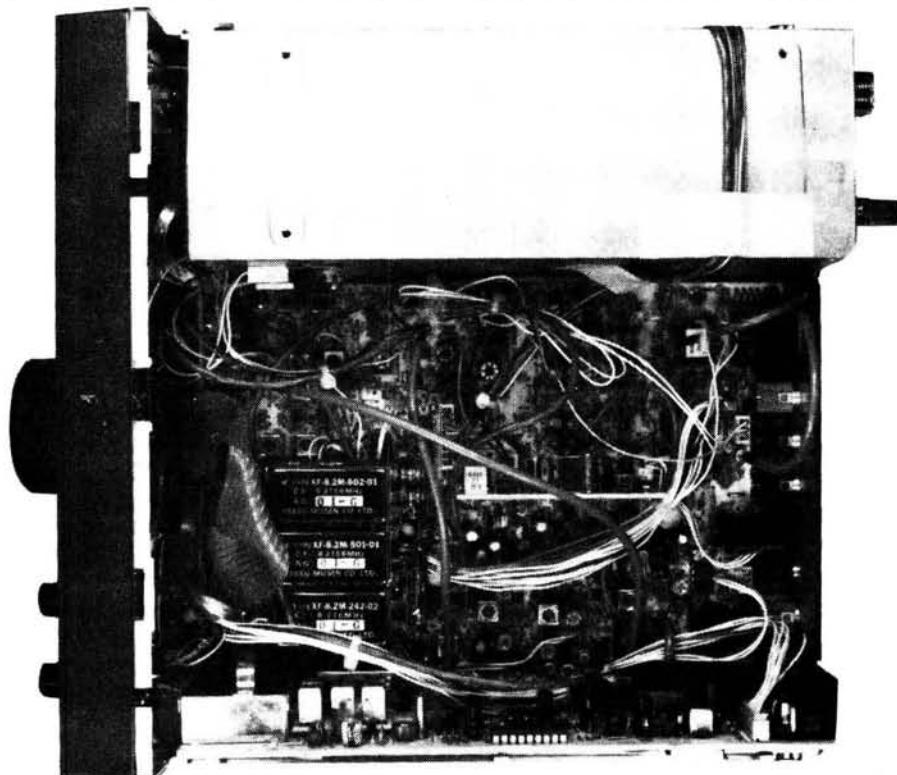

The v.f.o.s are selected by pressing the left-hand side of the dual purpose VFO/MR button which alternatively selects v.f.o. A or B with each operation. As I've said, the main use for the dual v.f.o.s is for working split frequencies and this operating mode is selected very easily by setting the required two frequencies in v.f.o. A and B then pressing the SPLIT button. If you should want to reverse these frequencies, say to listen on the transmit, you select the other v.f.o. whilst in receive. I must admit I thought this was all very well laid out and simple to use.

Last but not least a lithium back-up battery is fitted internally, to preserve the memory contents when the power is disconnected. According to Yaesu, it should have a life of about five years which is quite useful.

## Circuit Description


Despite the FT-747GX's position at the economy end of the market, the electronics are very well sorted. It would take far too long to give a complete circuit description, so I will just give you an outline of the important features. Starting with the receiver, the switched antenna feed is passed to the first mixer via a low-pass filter and a diode-switched set of band-pass filters. These filters split the band into six sections, i.e. 0.1–2.5, 2.5–4, 4–7.5, 7.5–14.5, 14.5–21.5 and 21.5–29.9MHz. The first mixer comprises a pair of *n*-channel f.e.t.s and produces a first i.f. of 47MHz. This signal is then amplified before passing to the second mixer which produces the second i.f. of 8.215MHz—that's where all the main filtering takes place.

The rig is well endowed with filters as there are three second i.f. crystal filters to cover s.s.b., c.w. and a.m. I must admit I was very surprised to find a narrow c.w. and an a.m. crystal filter in an economy rig, it just goes to show how much thought Yaesu have put into the rig. For the demodulation there are three separate demodulators, one for each mode. If the optional f.m. unit is fitted, then a third i.f. is used which is the standard 455kHz. The output of the demodulators is fed via an active filter to an audio pre-amplifier and then to the main amplifier via the squelch switch.

One other receiver feature worthy of note is the noise blower. This is another place where cost cutting could so easily have been made, but instead a proper i.f. noise gate has been employed. This helps maintain the high engineering quality of the rig.

On the transmit side, the same high quality has been maintained with the same i.f.s being used, but in reverse order. The filtering is very good with the driver output using the same bank of band-pass filters as the receiver, the p.a. uses the conventional push-pull arrangement with the output fed to the antenna via a bank of relay-switched low-pass filters.

Frequency generation is all micro-

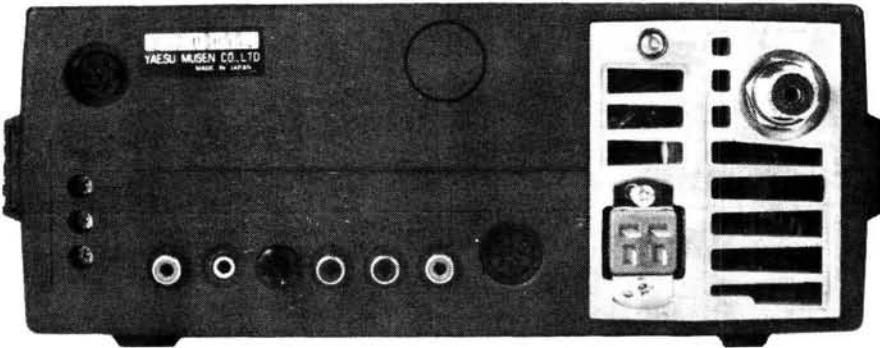

processor controlled with a 5.4MHz crystal providing the reference frequency. In order to cope with the wide range of local oscillator frequencies required by the first mixer, a bank of four v.c.o.s are used.

Other on-board oscillators include a 38.84MHz second local oscillator, a switchable carrier insertion oscillator and a 4MHz clock for the microprocessor. I think Yaesu have actually managed the compromise between economy and facilities very well.

## Computer Control

This seems to be a standard feature of virtually all Yaesu rigs and I must say it's good to see a manufacturer adopting a standard and sticking to it. One very attractive feature of the system is that, providing you are capable of some quite simple programming, virtually any computer with a serial interface and t.t.l. levels can be used. If, on the other hand, you prefer to leave the programming to others then there are a selection of programs available. Access to the FT-747GX's microprocessor is achieved via a 6-pin DIN type socket on the rear panel and from this point the frequency, memory and mode selections can be both read and set. In addition to the serial data lines, the p.t.t. and a.g.c. lines have been extended to this socket. This enables transmit/receive switching to be computer controlled and the a.g.c. line can be connected to an analogue to digital converter to give a computerised S-meter read-out!

## The Manual

The manual follows Yaesu's normal format and comprises a 28-page A4 booklet. In addition to this, there are several loose sheets containing full circuit and block diagrams despite the obvious complexity of this type of rig, the diagrams were actually quite easy to read. The main core of the manual was split into six chapters covering: specifications, controls, installation, operations, options and computer control.

Although the manual contained all the information required, I felt that the presentation could have been improved if more diagrams had been included to help illustrate some of the features. Two other points that I would have liked to have seen were a troubleshooting guide and a section to get you

on the air quickly. Despite these criticisms, I found that once I had become familiar with the basic operation of the rig, the indexing used in the manual enabled me to quickly locate particular topics.

Finally, for those of you who are interested in the computer control facilities offered by the FT-747GX, the last section of the manual covers this in some detail—including all the instruction opcodes and the data formats used. Although I have not actually tried it, there seems to be sufficient information in this section to allow the computer-literate enthusiast to write his or her own software to control the operation of the FT-747GX.

## On the Air

Having seen all the publicity given to this rig, I was really very keen to see how it actually performed. First job was to install it in the shack which was a remarkably simple task as there were very few external connections to be made, at least for phone or c.w. operation. The antenna used was my trusty nest of dipoles which covers all bands from 1.8 through to 30MHz.

Phone operation was tried first and I managed a successful contact on my first attempt, albeit only with another G station on 3.5MHz! I was given a 5/9+10dB report and told that the audio was very clear, that was at least a good start. Having established everything was basically working, I thought I would jump in with both feet and see how I fared on 14MHz where my humble nest of dipoles would be competing with high power stations using beam antennas. The results were very encouraging, as despite my lower signal strength, I was able to cut a path through the QRM and make several successful contacts.

Although it would have been helpful to have band-pass tuning and notch filters handy, the decision to omit these along with VOX has not seriously handicapped the performance. At this point I was beginning to believe Yaesu's publicity, you know the bit that goes, "... they all laughed at my rig until they saw my log book . . .".

The next stage was to dust off the key and try a bit of c.w. I have two keys in regular use, one is an old Admiralty up-and-downer and the other is an iambic type. The use of a standard 6.3mm jack on the FT-747GX meant that I could plug in either of these keys with no

## MAKE YOUR INTERESTS PAY!

More than 8 million students throughout the world have found it worth their while! An ICS home-study course can help you get a better job, make more money and have more fun out of life! ICS has over 90 years experience in home-study courses and is the largest correspondence school in the world. You learn at your own pace, when and where you want under the guidance of expert 'personal' tutors. Find out how we can help YOU. Post or phone today for your FREE INFORMATION PACK on the course of your choice. (Tick one box only!)

Electronics	<input type="checkbox"/>	Radio, Audio and TV Servicing	<input type="checkbox"/>
Basic Electronic Engineering (City & Guilds)	<input type="checkbox"/>	Radio Amateur Licence Exam (City & Guilds)	<input type="checkbox"/>
Electrical Engineering	<input type="checkbox"/>	Car Mechanics	<input type="checkbox"/>
Electrical Contracting/Installation	<input type="checkbox"/>	Computer Programming	<input type="checkbox"/>
<b>GCE</b> over 40 'O' and 'A' level subjects			<input type="checkbox"/>



Name \_\_\_\_\_

Address \_\_\_\_\_

P. Code \_\_\_\_\_

International Correspondence Schools Dept EES B8, 312/314 High St., Sutton, Surrey SM1 1PR. Tel: 01-643 9568 or 041-221 2926 (24hrs)



### TONNA F9FT THE VHF/UHF ANTENNA SPECIALIST

50MHz	£41.69(a)	435MHz	£28.62(a)
20505 5 element		20309N 9 element	£34.35(a)
144MHz		20319N 19 element	£39.66(a)
20804N 4 element	£27.60(a)	20438 19 element crossed	£44.57(a)
20808N 4 element crossed	£34.96(a)	20921N 21 element 432MHz	£44.57(a)
2u809N 9 element fixed	£30.87(a)	20922N 21 element ATV	
20809N 9 element portable	£33.12(a)	20623 23 element	£30.36(b)
20818N 9 element crossed	£57.86(a)	20696 4 x 23 element - power	£160.00(a)
20813N 13 element portable	£46.00(a)	splitter - stacking frame	
20817N 17 element	£61.54(a)	20655 55 element	£46.20(a)
144/435MHz	£57.86(a)	20666 4 x 55 element - power	£230.00(a)
20899N 9 & 19 element Oscar		splitter - stacking frame	

All prices include VAT. Please add carriage (a) £5.00. (b) £2.20.  
ACCESS or VISA cardholders telephone your order - immediate despatch.

Callers welcome but by telephone appointment only please.

SEND 50p FOR OUR CATALOGUE WHICH CONTAINS FULL SPECIFICATION OF ALL OUR ANTENNAS, POWER SPLITTERS, STACKING FRAMES, COAXIAL CABLES ETC.

SOLE UK DISTRIBUTOR  
**RANDAM ELECTRONICS (P)**

12 Conduit Road, Abingdon,  
Oxon. OX14 1DB.  
Tel: (0235) 23080 (24 hours)

## The new Antex guide to Temperature Controlled Soldering

- New Temperature-Control Products Launched
- "How to choose the Right Iron" section.
- Full technical specifications of the whole Antex range.

Complete the coupon or clip to your business card and send for your copy of "Precision Soldering"

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_



ELECTRONICS

Mayflower House, Armada Way, Plymouth, Devon, PL1 1JX  
Tel: (0752) 667377 Telex: 45296 Fax: (0752) 220363



**D A T O N G**  
ELECTRONICS LIMITED

Clayton Wood Close  
West Park  
Leeds LS16 6QE  
Tel: 0532 744822

## For products you can rely upon to give amazing results

For information on **Active Antennas, RF Amplifiers, Converters, Audio Filters, the Morse Tutor and Speech Processors** send or telephone for a free catalogue and selective data sheets as required.

All our products are designed and made in Britain.  
Orders can be despatched within 48 hours subject to availability.



- VISA AND ACCESS WELCOME -



problems. Also, the voltage and current available from the key jack means that there should be no problems connecting a wide range of keys to this rig.

One great asset to c.w. operation on the FT-747GX is the inclusion of a narrow (500Hz bandwidth) crystal filter as standard. This filter was certainly a tremendous help when operating in the crowded c.w. segments of some of the bands.

Transmit/receive switching can be accomplished in three ways: either by pressing the MOX button on the front panel, manually grounding the p.t.t. line or by using the semi-break-in facility. The semi-break-in is permanently active with the manual modes providing a means of keying the transmitter for longer than would be normal with the semi-break-in. The break-in facility was rather like VOX on phone in that as soon as the key was operated the transmitter switched to transmit and only returned to receive after waiting a pre-set length of time from the last key press. This delay time was adjustable via an internal potentiometer, though the top cover had to be removed to achieve this.

The only other adjustment I had to make was to the side-tone level, which was set rather too loud for my operating conditions. The adjustment was very easy and meant altering a small pre-set potentiometer via an access hole in the bottom cover.

Having achieved success on both phone and c.w., I thought I had better try the data modes. The first tests were with RTTY and AMTOR using my G3LIV filter terminal unit and the G3WHO software running on a BBC-B. The connections to the FT-747GX were quite simple, requiring an audio input, audio output and p.t.t. line. The provision of a fixed level audio output and the p.t.t. lines on phono jacks on the rear panel went a long way to easing the connections. It's a shame that the only available audio input was via the microphone socket on the front panel.

This did mean that the connections became a little untidy.

Once all the connections had been made, the next step was to set-up the drive level which is really dependant on the power supply you are using. As the one I was using was not rated for 20A continuous, I adjusted the drive for about 50 watts output.

After the setting-up was complete, I tried a few contacts and once again achieved immediate success with several contacts on 14MHz, including an RTTY mailbox. The next mode to try was AMTOR, which places quite high demands on the transceiver as the transmit/receive switching times are critical. The G3WHO software I was using includes AMTOR, so no extra connections were required to use this mode.

My first test was to a local AMTOR mailbox on 3.5MHz and this link worked perfectly first time, which was pleasing. Having boosted my confidence, I moved to 21MHz to see if there was any DX about. While searching I heard a CE (Chile) station calling a Spanish station with no success, so I tried calling the CE. I was quite astounded when the link worked on the first call, the QSO continued with a very low error rate, hence demonstrating that the FT-747GX is very well set-up for this mode.

Next on the list of data modes was packet, which is probably one of the fastest growing areas of amateur radio. For this mode I used a Siskin TNC-220 to interface between the computer and the FT-747GX. The connection problems were much the same as with RTTY with regard to the audio input. The operation was again very successful with several mailboxes successfully contacted.

The final mode tried was FAX, which was in receive only, using an ICS Electronics FAX-1 decoder. The performance of the FT-747GX was fine over a wide range of signals from amateur FAX through to weather FAX

pictures. The only problem that you may have is with the 25Hz tuning steps if you try to receive I.F. FAX stations using 150Hz shift, though I would add that there were no problems with the FAX-1.

One important point to consider when using data modes is that the rig is used in close proximity to a lot of "noisy" computer equipment and the internal screening of the rig becomes significant. During my on-air testing the FT-747GX was operated within inches of a BBC-B computer, disk drives and an Epson printer. Despite the increased use of plastics in the casing of the FT-747GX, I was pleased to find that there were no signs of interference from the computer equipment.

As the review model was fitted with the optional f.m. unit, this was also tried, again with great success. The audio quality on both transmit and receive was very good.

## Summary

If you've read this far, then you have probably already gathered that I liked the FT-747GX! The task of selecting the right compromise between cost and performance is never an easy one, but I think Yaesu are pretty well spot-on with the FT-747GX. The important point is that the basic performance of the transceiver is very good with only the frills omitted to produce the required economies. Despite these economies, I was very pleased to see that a narrow c.w. filter was included along with the capability for computer control. Another bonus was the ability of the p.a. to work at full power for long periods. Well done, Yaesu!

The FT-747GX is available from *South Midlands Communications Ltd.*, *School Close, Chandlers Ford Ind. Est., Eastleigh, Hants*, priced £659 and £39.99 for the optional f.m. unit.

My thanks to SMC for the loan of the review model.

**PW**

## \*MAKERS SPECIFICATIONS

### TRANSMITTER

<b>Frequency coverage:</b>	1.5-1.9999MHz (160m) 3.5-3.9999MHz (80m) 7.0-7.4999MHz (40m) 10.0-10.4999MHz (30m) 14.0-14.9999MHz (20m) 18.00-18.4999MHz (17m) 21.00-21.4999MHz (15m) 24.5-24.9999MHz (12m) 28.0-29.9999MHz (10m)
<b>RF power output:</b>	c.w./s.s.b./f.m.*: 100W p.e.p./d.c. a.m.: 25W carrier
<b>Carrier suppression:</b>	More than 40dB below peak output
<b>Unwanted sideband:</b>	Better than -50dB with 1kHz a.f. input
<b>Spurious emissions:</b>	Harmonic: better than -50dB Non-harmonic: better than -40dB
<b>Microphone:</b>	Impedance 500-600Ω
<b>Audio response:</b>	Less than -6dB from 400-2600Hz
<b>3rd Order intermodulation distortion:</b>	Better than -25dB (@ 100W p.e.p.)
<b>Deviation (f.m.):</b>	± 2.5kHz max.*

### RECEIVER

<b>Frequency coverage:</b>	100kHz-29.9999MHz
<b>Intermediate frequencies:</b>	47.055MHz, 8.215MHz, 455kHz (f.m. only*)
<b>Sensitivity:</b>	Input for 10dB S+N/N (except f.m.)
	0.5-1.5MHz
s.s.b./c.w.:	0.5μV
a.m.:	2.0
f.m.:	0.7μV for 12dB SINAD (above 28MHz)
<b>Squelch sensitivity:</b>	
s.s.b./c.w./a.m.:	4.0μV within 0.5-1.5-30MHz
f.m.:	2.0μV above 1.5MHz
	0.32μV
<b>Image rejection:</b>	Better than 70dB within 1.5-30MHz
<b>I.F. rejection:</b>	Better than 60dB within 1.5MHz
<b>Selectivity:</b> (-6/-60dB)	2.2/5kHz
s.s.b./c.w. (W)/a.m. (N):	500Hz/1.8kHz
c.w. (N):	6/14kHz
a.m. (W):	8/19kHz (for -6/-50dB)
f.m.:	± 9.975kHz
<b>Clarifier range:</b>	At least 1.5W into 8Ω with 10% t.h.d.
<b>Max. Audio output:</b>	At least 1.5W into 8Ω with 10% t.h.d.


### GENERAL

<b>Tuning steps (selectable):</b>	s.s.b./c.w.: 25Hz or 2.5kHz/step a.m.: 1kHz or 10kHz/step f.m.*: 12.5kHz or 5kHz/step
<b>Frequency stability:</b> (0° to +40°C)	s.s.b./c.w./a.m.: ± 200Hz f.m.*: ± 300Hz
<b>Frequency accuracy:</b>	s.s.b./c.w./a.m.: ± 200Hz f.m.*: ± 300Hz
<b>Antenna impedance:</b>	50Ω unbalanced (nominal)
<b>Power requirements:</b>	13.5V d.c. ± 10% neg. ground 19A max. at 100W output
<b>Dimensions:</b>	W238 x H93 x D238mm (without knobs)
<b>Weight:</b>	3.3kg (7.25lb) approx.

\*F.M. operation requires optional unit.

# AMATEUR RADIO COMMUNICATIONS LTD.

AUTHORISED ICOM, YAESU AND STANDARD DEALER



## NEW IN STOCK

Black Jaguar  
MKIII

**£235.00**

Switchable between AM FM. Base and mobile charging frequency range. 26-30MHz, 60-88MHz, 115-117MHz, 210-260MHz, 410-520MHz.



## JUST ARRIVED

Bearcat 200XLT  
Up to 950MHz

**£249.00**

WE LOOK FORWARD TO  
SEEING ALL OUR FRIENDS  
AND CUSTOMERS AT THE  
LEICESTER SHOW ON STAND

**NO. 45a** Where we will offer you some of the best deals at the Rally.  
Peter (G4KKN).

ALWAYS A LARGE  
SELECTION OF  
SECONDHAND EQUIPMENT  
AND COMMISSION SALES ON  
DISPLAY. TELEPHONE FOR  
DETAILS



**£599**

## COME AND SEE THE NEW STANDARD C5200 ED

\*Instant Finance Available Subject to Status  
The new Standard C5200 leads the way into a new generation of dual band mobile transceivers. It is virtually two radios in one box. There are two individual bright green LED displays — one for 70cm and one for 2m — each with a separate frequency indicator. S meter and Busy indicator. Both bands can be received simultaneously and the powerful 2W of audio from each band can be heard from the built-in speaker. If this gets a little confusing, there are two separate external speaker outputs on the back of the set — one for each band — or one external speaker can be used for both bands. Each band has its own separate Volume and Squelch controls and there is also an Automatic Mute control that can be set to mute the audio from one band while the other one is being received. Full Duplex capability, 45W each Band, 4 scan modes, 20 memories.

38 Bridge Street, Earlestown, Newton-le-Willows,  
Merseyside WA12 9BA. Only 1 mile from Junction 23 – M6  
Telephone: N-le-W (09252) 29881/2  
OPEN TUES-SAT 10 a.m. - 5 p.m.



## INSTANT FINANCE AVAILABLE SUBJECT TO STATUS

MICROWAVE MODULES · TONNA · JAYBEAM · SANDPIPER · BNOS · AKD · CAPCO · REVEX

STANDARD  
COMMUNICATIONS

### R.A.S. (Nottingham)

G6XBH  
G1RAS  
G8UUS  
**Radio Amateur Supplies**  
Tel: 0602 280267



#### Visit your Local Emporium

Large selection of New/Used Equipment on Show

#### AGENTS FOR:

F.D.K.  
AZDEN  
ICOM  
YAESU  
ALINCO  
KEMPRO

#### ACCESSORIES:

Welz Range  
Microwave Modules  
Adonis Mics  
Mute Pre-Amps  
Bareco Mast Supports  
DRAE Products  
BNOS Linears & P.S.U.'s

#### AGENTS FOR CELLNET AND VODAFONE RADIOS

AERIALS, Tonna, Halbar, New Diamond Range of Mobile Whips, Jaybeam  
BRING YOUR SAH EQUIPMENT IN FOR SALE

JUST GIVE US A RING

Monday: CLOSED Tuesday-Saturday: 10.00am to 5.00pm

3 Farndon Green, Wollaton Park, Nottingham NG8 1OU  
Off Ring Rd., between A52 (Derby Road) & A609 (Ilkeston Road)

### PRACTICAL WIRELESS KITS



Badger 144 MHz Receiver	Oct 88	59.00	Simple 50MHz Converter	Sept 86	21.50
Portland RF Voltmeter	July 88	19.70	Arun Parametric Filter	May 86	49.30
Orwell MW Receiver Excluding case	Feb 88	73.00	Meon 2 50MHz Transverter (144MHz IF)	April 86	41.00
Otter 50MHz Receiver	Jan 88	41.30	Meon 2 70MHz Transverter (144MHz IF)	April 86	44.00
RTTY Tuning Indicator	Nov 87	24.90	Ritzy Morse Modem (exc. case)	Jan 86	31.85
Blenheim v.h.f. to h.f. receive converter	Sept 87	26.50	Two Tone Oscillator	Dec 85	25.30
Downton Freq. to Voltage Converter	June 87	19.70	Mean 50MHz Transverter (28MHz IF)	Oct 85	41.00
AXE Signal Tracer	May 87	49.00	Mean 70MHz Transverter (28MHz IF)	Oct 85	41.00
Itchen LCR Bridge	April 87	27.90	Mean 144MHz Transverter (28MHz IF)	Oct 85	41.00
Woodstock Short Wave Converter	March 87	26.50	Fet Dip Oscillator	Oct 85	19.90
Masthead Preamp For 144MHz	Feb 87	39.30	Capacitance Meter	Oct 85	21.30
Westbury Basic Wobbulator	Jan 87	16.50	Add On BFO	Aug 85	12.95
High Impedance Mosfet Voltmeter	Dec 86	25.30	Morse Sending Trainer	July 84	14.00
Taw VLF Converter	Nov 86	14.20	Auto Notch Filter	June 84	25.90
Active Antenna	Nov 86	17.80			
Automatic Nicad Charger	Oct 86	18.20			

PRICES DO NOT INCLUDE VAT, WHICH SHOULD BE ADDED TO THE TOTAL ORDER VALUE AND P&P CHARGES. P&P = 70p UNLESS SPECIFIED. ARTICLE REPRINTS 50p (IF REQUIRED). ALL KITS ARE COMPLETE (LESS BATTERIES), UNLESS SPECIFIED INCLUDING PCB, CASE, ALL COMPONENTS, CONNECTORS AND HARDWARE. ALL COMPONENTS ARE NEW AND TO FULL SPECIFICATION.

CHEQUE, P.O., OR ACCESS TO:

**CPL ELECTRONICS**, 8 Southdean Close, Hemlington, Middlesbrough, TS8 9HE  
TEL: 0642 591157.

Other kits are available plus a wide range of components etc.

ACCESS, MAIL OR TELEPHONE ORDERS WELCOMED. FREE PRICE LIST ON REQUEST.



### Siskin Electronics

For RF Data Communications Products



## Packet Radio

### Pac-Comm

TNC-220 Dual port (HF/VHF) very popular £139.00  
TINY-2 Single port VHF TNC, Great Value £109.95  
Micro-2 Low power (40mA) TNC, high spec £139.00

### AEA

PK-88 Low price TNC from AEA £109.95  
PK-232 Packet/Ascii/CW/Amtor/RTTY/  
WEFAX and NAVTEX £269.95

### KANTRONICS

KPC-2	VHF/HF TNC, WEFAX and PBBS inc.	£159.00
KPC-2400	Packet all 1200 and 2400 baud!!	£197.00
KAM	Packet/CW/RTTY/Ascii/Amtor/WEFAX, KA-NODE and PBBS inc.	£265.00

Come and see our Stand at the Leicester Rally and pick up our new Autumn Catalogue (or phone here for a copy)

Southampton Road,  
Hythe, Southampton,  
SO4 6WQ,  
England.

FAX: 0703-847754

(Personal callers welcome but please phone first)

**Orders and Information  
Phone: 0703-849962**

**Or Cellnet (0860) 616770**

## Yaesu

FT767	HF Transceiver	1550.00	(3.00)	IC761	New Super HF Transceiver
FTX651/20	2m/70cm Mobile (767)	215.00	(3.00)	IC735	HF Transceiver
FTX676/20	70cm Mobile (767)	169.00	(3.00)	AT100	New HF Transceiver
SP767	Speaker	69.95	(2.50)	AT150	100W ATU (75/745)
FT290	All New Super 290	429.00	(2.00)	PS20	150W ATA (735)
FT290	Mobile M/M Mode 2.5W	10.00	(2.00)	PS20	50W M/M mode portable
MMB11	Mobile Bracket	PRICE	(2.00)	IC290D	2m/25W M/Mode
NC11C	Charger	6.50	(2.00)	IC28E	25W FM
CSC1A	Carrying Case	7.50	(2.00)	IC28H	2m/45W FM
HA15	70cm 1/2 wave	12.50	(2.00)	IC28J	2m/45W Min HH
YHA44D	70cm 1/2 wave	23.00	(2.00)	IC202	2m HH
YM49	Speaker/Mike	14.55	(2.00)	IC275E	New 2m/25W Base Str
MMB15	Mobile Bracket	18.40	(2.00)	IC275F	25W 144MHz Osc
FT290	70cm HH	22.50	(2.00)	GP2	Ext Speaker
FT73R	70cm Min HH	243.50	(3.00)	CK70	DC Cable (R70-R71)
FN89	Nicad Battery Pack (23/73)	27.60	(2.00)	EX257	FM Board (R70-R71)
FN810	Nicad Battery Pack (23/73)	32.60	(2.00)	GD1	World Clock
FN811	Nicad Battery Pack (23/73)	50.00	(2.00)	IC02	Waterproof Bag all item HH
NC18C	Charger (23/73)	12.35	(2.00)	DC35	Desk Charger
SMC28	Charger (23/73) 13A Plug	15.40	(2.00)	BP3	Battery Pack 8.4V (2AE/02/04E)
NC28	Charger (23/73)	17.71	(2.00)	BP4	Empty Battery Case (2AE/02/04E)
NC29	Base Charger (23/73)	18.40	(2.00)	BP5	Empty Battery Case (2AE/02/04E)
PAS	AC Adapter/Charger (23/73)	29.75	(2.00)	CP1	12V Charger Lead BP3/7.8
MH12A2B	Speaker Mic Miniature (23/73/27)	27.00	(2.00)	FA1	2m Helical BNC
MH18A2B	Speaker Mic Miniature (23/73/27)	425.00	(10.00)	FA2	70cm Flexible 1/4 wave Antenna (BNC)
FN83	Spare Battery Pack	10.00	(2.00)	FA3	100cm Flexible 1/4 wave Antenna (BNC)
FN84	Spare Battery Pack	46.00	(2.00)	FA4	150cm Flexible 1/4 wave Antenna (BNC)
FN85	Empty Cell Case	10.00	(2.00)	HS1050	Head set Boom Mic
FRG9600M	60-950MHz Scanning RX	509.00	(—)	HS1050B	Voice Unit HS10 (02/04E) only
MMB10	Antenna for 9600	10.00	(2.00)	PTT SW Box HS10	PTT SW Box HS10
NC9C	Mobile Bracket	10.00	(2.00)	IC1	Leatherette Case 2E/4+BP
PA3	AC Adapter/Charger	11.50	(2.00)	IC2	Leatherette Case 2E/4+BP
MF24A	HF Receiver	21.85	(2.00)	IC3	Leatherette Case 2E/4+BP
FRV8800	Converter 118-175 for above	63.99	(—)	IC4	Leatherette Case 02E/4+BP
FRV7700	100MHz 1.5W	100.00	(2.00)	IC5	Leatherette Case 02E/4+BP
MH88	70cm 2000 Spur mic	59.00	(2.00)	IC6	Shoulder Strap
MD188	Desk 6000 Spur mic	79.00	(2.00)	SS1	6000cm BP Base Mic
MF1A3B	Boom mobile mic	25.00	(2.00)	SM16	1.5m 340-600cm BP Base Mic
YH77	Lightweight phones	19.99	(2.00)	SM17	3.6m 340-600cm BP Base Mic
YH55	Added 1000Hz filter	56.35	(2.00)	SM18	Comp/Graphic Mike
YH1	Leather Mobile Hand Boom mic	19.99	(2.00)	SM19	Comp/Graphic Mike
SB1	PTT Switch Box 208/708	22.00	(2.00)		
SB7	PTT Switch Box 290/790	22.00	(2.00)		
SD10	PTT Switch Box 270/720	12.00	(2.00)		
FT736 NEW	160-10 All mode TX Gen. Cov.	1450.00	(—)		
FT747GX	23cm FM Transceiver	659.00	(—)		
FT231R	2m 45W FM Mobile	475.00	(—)		
FT212RH	New 2m 45W FM Mobile	309.00	(—)		
		349.00	(—)		

### Datong Products

PC1	Gen. Cov. Conv.	137.40	(2.50)
VLF	Very low frequency conv.	34.90	(2.50)
FL2	Multi-mode audio filter	89.70	(2.50)
FL3	Audio filter for receivers	129.00	(2.50)
ASP/B	r.f. speech clipper for Trio	82.80	(2.50)
ASP/A	r.f. speech clipper for Yaesu	82.80	(2.50)
ASP	As above with 8 pin conn.	89.70	(2.50)
D29	8 pin r.f. speech clipper	56.35	(2.50)
D30	Morse Tuner	56.35	(2.50)
RFA	RF switched pre-amp	36.00	(2.50)
AD270-MPU	Active dipole with mains p.s.u.	51.75	(2.50)
AD370-MPU	Active dipole with mains p.s.u.	69.00	(2.50)
DC144/28	2m converter	39.67	(2.50)
ANF	Automatic notch filter	67.85	(2.50)
SRB2	Auto Wwoodpecker blanker	86.25	(2.50)
RPA	RF switched pre-amp	36.00	(2.50)

Instant credit available  
Mail/Telephone order by cheque or credit card. Cheques cleared before goods despatched (E&OE)



VISA

OPEN TUES - SAT 9.00-5.30  
(CLOSED MONDAYS)

### CW Keyers

VIBROPLEX	Standard	63.33	(3.00)
	Standard	78.00	(3.00)
	Vibrokeyer Standard	63.98	(3.00)
	Vibrokeyer Deluxe	78.09	(3.00)
	The Original Standard	73.54	(3.00)
	The Original Deluxe	82.74	(3.00)

BENCHER	Squeeze Key, Black base	67.42	(3.00)
	Squeeze Key, Chrome base	76.97	(3.00)

STARMASTER	Electronic Keypoint Unit (No Paddle)	54.70	(3.00)
	Electronic Memory Keypoint (No Paddle)	95.00	(3.00)

## KENWOOD

TS540S	9 Band TX General Cov RX	1995.00	(—)
Auto/ATU	Auto/ATU	244	(—)
Ext Speaker	Ext Speaker	87.55	(3.00)
TS530S	9 Band TX General Cov RX	1695.00	(—)
Auto/ATU	Auto/ATU	206.03	(3.00)
Ext Speaker	Ext Speaker	95.23	(3.00)
TS520S	9 Band TX General Cov RX	1138.00	(—)
Auto/ATU	Auto/ATU	144.82	(3.00)
Ext Speaker	Ext Speaker	56.00	(3.00)
Matching Power Supply	Matching Power Supply	173.78	(3.50)
Static Monitor	Static Monitor	40.81	(3.00)
Band Sync Unit (830/940)	Band Sync Unit (830/940)	77.00	(2.50)
70/160 2kW Linear	70/160 2kW Linear	1495.00	(7.00)
118.14MHz Converter (R2000)	118.14MHz Converter (R2000)	161.94	(2.50)
General Coverage HF/RX	General Coverage HF/RX	875.00	(—)
118.14MHz Converter (R2000)	118.14MHz Converter (R2000)	157.00	(—)
Ext. Battery Case TH21/41	Ext. Battery Case TH21/41	11.86	(2.00)
DC Power Supply TH21/41	DC Power Supply TH21/41	25.00	(2.00)
Headset with Vox TH21/41	Headset with Vox TH21/41	32.91	(2.00)
Power Jack TH21/41	Power Jack TH21/41	24.00	(2.00)
Desk Charger TH21/41	Desk Charger TH21/41	99.00	(2.50)
Soft Case TH21/41	Soft Case TH21/41	11.86	(2.00)
Speaker/Mic TH21/42/2600	Speaker/Mic TH21/42/2600	28.31	(2.00)
4P DC Jack	4P DC Jack	45.00	(2.00)
8P Desk Mic	8P Desk Mic	88.22	(3.00)
Electric Desk Mic	Electric Desk Mic	53.98	(3.00)
Desk Mic Audio Level Comp	Desk Mic Audio Level Comp	99.00	(3.00)
8P DC Jack	8P DC Jack	89.00	(2.00)
4P Fax Mic	4P Fax Mic	21.72	(2.00)
Mobile Mic (6p o. Rpi)	Mobile Mic (6p o. Rpi)	52.67	(3.00)
HF Low Pass Filter	HF Low Pass Filter	32.26	(2.50)
Lightweight Headphones	Lightweight Headphones	24.00	(2.00)
HSS	HSS	37.54	(2.50)
HF 9 Band Gen. Cov. TX/RX	HF 9 Band Gen. Cov. TX/RX	862.00	(—)
2/70cm FM Dual band model	2/70cm FM Dual band model	499.00	(5.00)
500-950MHz AM/FM Scanner	500-950MHz AM/FM Scanner	465.00	(6.00)

### SWR/PWR Meters


HANSEN	130/440 MHz 20/200W	52.75	(2.50)
FS5E	3.5-15MHz 20/200W	42.75	(2.50)

### Miscellaneous

COMM RXs	Racal RA.17 MkII general coverage HF Rx 500Kc to 30 Mcs in 30 bands as film scale tuning approx 45ft variable selectivity 6 pos 100c's to 8Kc, BFO, N Lim, AVG or manual control, int spk, tuning meter etc. Supplied checked and aligned with handbook & connec: £188. <b>SIG GENs</b> . Marconi TF995/A2 1.5 to 220 Mcs AM FM var deviation & AM Mod, metered O/P fitted F/B & coarse atten to 1 Uv at 50 or 75 ohm in table case size 17x12x9" mains operated with book tested. £115 Army No.2 Osc 20/80 Mcs in two bands AM/FM var O/P & deviation mains or 12v DC tested with connec. £45. <b>CRYSTAL CAL</b> , standard 100Kc unit with close tol oven incorporates 1" CRT unit to enable phase checks to make to 100Kc amp unit, provides 100Kc O/P at low level, mains operated tested with connec. £28. <b>ARMY TEST KIT</b> for use with A 14 set as mains operated bench p.u. 3x12v DC metered with set of connectors etc in 19" table case. £65. <b>RF ASS</b> spare front end units for R210 Rx tunes 2/16 Mcs in 7 bands with 3 valves as IF O/P in range 450-470Kc with circ. £17.50. <b>VIDEO RECORDERS</b> Sony portable for use on 12v DC reel to reel 5" spools inc sound approx size 10x12x6" tested with circ. £65 mains p.u. charger £15. <b>ARMY HAND GEN</b> nom. O/P 12.14V DC 1 amp with elec regulator. £24.50. <b>ARMY MONOC SIGHTS</b> 5x 27mm var focus. £9. <b>ARMY AE KITS</b> 30f in 10x 3ft 1" screw sections with guys, stakes, base insul etc in carry bag new cond. £36. <b>METAL DETECTORS</b> ex Army described as bomb locators made by Forster in West Germany suitable for Ferros metal only range 3 to 5 metres, comprises search probe 24" long 2" dia (can be used in water) control unit with 4 ranges of sensitivity 30-90 300-900 gammas, meter, center reader, electronic unit transistors 6V DC etc. 4x 12V 2 batteries, provision for spk earphone supplied in fitted wood cheat size 34x15x7" with inst book & circ tested for operation. £15. <b>RADIOSONDE UNITS</b> , crystal controlled version of M.60 all trans as sensors for temp, press & R.H. sent as CW in code Tx en 27.950 reags new cond. £16.50, also valve type £12.50. <b>VARIACS</b> panel mounting 240V O/P 0.270 at 2 amps tested £18.50. Above prices include carriage & VAT. Goods ex equipment unless stated new SAE with enquiry or 2 x 18p stamps for List 42/1.
----------	---

### A.H. SUPPLIES

Unit 12, Bankside Works, Darnall Rd, Sheffield S9 5HA. Ph. 444278 (0742)



## USED AMATEUR EQUIPMENT?

### I Buy, Sell & Exchange!

**SELLING:-** We pay top prices for your clean amateur equipment.

**BUYING:-** We have a large selection of used gear. Phone your requirements! Phone Dave, G4TNY on 0708 862841 or 0836 201530, 9.30 to 7 pm, Mon to Sat.

**PLEASE NOTE OUR NEW ADDRESS AND PHONE NUMBER! 5 MINS FROM M.25!**

**Unit 14, Thurrock Commercial Centre, Juliet Way, South Ockendon, Essex. RM15 4YG.**

Personal callers by appointment, please.

**G4TNY AMATEUR RADIO**

**PART EXCHANGE**

Send SAE for lists.

**MAIL ORDER**

....CALLING ALL LISTENERS....CALLING ALL LISTENERS....CALLING ALL LISTENERS.....

## OCTOBER ISSUE OUT NOW

ROBERTS RADIO RCS-80  
RECEIVER REVIEW  
*A Quality Domestic Receiver  
at Home in Shack or Lounge*

### LISTENING TO THE WORLD FREE PULL-OUT BOOKLET

*There's More To Radio Than Radio One  
An introduction to the world of radio as a hobby*

### REGULAR FEATURES

*The ever popular SEEN & HEARD, AIRBAND,  
SCANNING, WHAT RECEIVER?  
& BANDSCAN continue to keep you informed.*



...PLACE AN ORDER WITH YOUR NEWSAGENT..PLACE AN ORDER WITH YOUR NEWSAGENT...

## Tidy up your shack

### PW BINDERS

**Only £3.50 each** (plus £1 p. & p. for one binder, £2 p. & p. for two or more, UK or overseas)

Are you tired of sifting through cardboard boxes and carrier bags to find that useful item in PW?

Our **smart new style** binders, covered in blue plastics, are a must for your library, keeping your radio magazines in good condition and easily accessible.

### Plus!

Tidy up those other mags too. Plain binders to take any A4 size magazines—no names, no pack drill!

### HOW TO ORDER

Send a postal order, cheque or international money order with your order, stating number and type required to **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15**

**1PP.** Payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 678558. Normally despatched by return of post but please allow 28 days for delivery.  
Prices include VAT where appropriate.



0202 678558   (24 hour Answer Service)

# Practically Yours

By Glen Ross G8MWR

The ubiquitous v.s.w.r. bridge does an excellent job on coaxial cable but what happens if you want to do the measurement on  $300\Omega$  flat line? Your unbalanced bridge is not much help on balanced transmission line. There are two ways around this problem, the first is close to the radio amateur dream, of getting something for nothing. All that is required is a length of  $300\Omega$  twin lead about 610mm long (or 150mm for v.h.f. use) and two 6.3V dial lamps. The two lamps are connected across the twin lead as shown in Fig. 1 and the construction is complete.


## Application

To use the indicator simply tape it to the transmission feeder in such a way as to keep the two wires in the v.s.w.r. bridge line in close proximity to the wires in the TX feeder. This means the wide surfaces of the  $300\Omega$  ribbon are taped together as in a sandwich. The next step is to fire up the transmitter. If you have a well-matched line only the lamp nearest the transmitter will light, but if there is a mismatch then both lamps will light. The difference in brilliance is an indication of how high the v.s.w.r. is. Depending on the band and power in use, you may have to experiment a little with the line length and perhaps the current rating of the lamps. If all you are looking for is a minimum v.s.w.r. indicator to assist in tuning up your antenna, or to make sure the system is not misbehaving, then this is all you will need.


**Table 1**

SWR	Meter* reading	% Reflected power
9.0	8.0	64.00
8.0	7.7	59.29
7.0	7.5	56.25
6.0	7.1	50.41
5.0	6.6	43.56
4.0	6.0	36.00
3.0	5.0	25.00
2.5	4.2	17.64
2.0	3.3	10.89
1.9	3.1	09.61
1.8	2.8	07.84
1.7	2.5	06.25
1.6	2.3	05.29
1.5	2.0	04.00
1.4	1.6	02.56
1.3	1.3	01.69
1.2	0.9	00.81

\*Meter reading assumes scale markings of 1-10

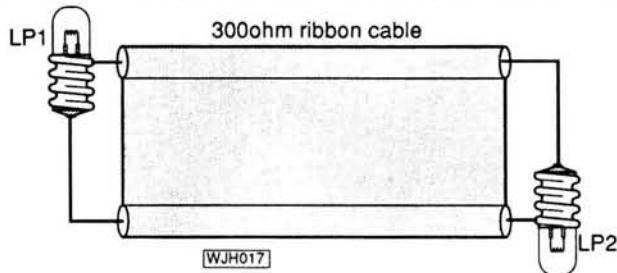

**Fig. 1: Construction of twin lamp v.s.w.r. indicator (300Ω line length and LP1,2 wattage see text)**

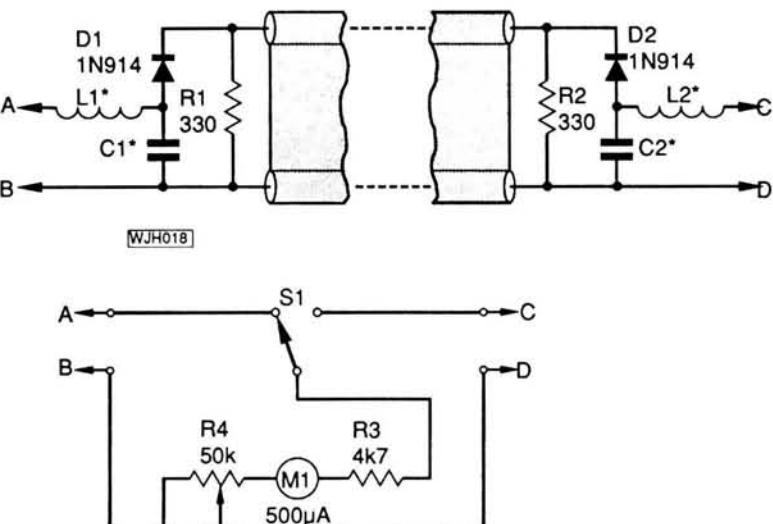

**Fig. 2: Remote sensor for driving meter circuit**

## Turning it into Real Readings

If you want to be able to read the actual ratio of mismatch then you need something a little more complex. The lamps are removed from the line and are replaced by the small detector networks shown in Fig. 2. These are then used in conjunction with a normal metering circuit, with facilities to change from forward to reverse indication. The readings are taken in the normal way, by first setting the forward reading to full scale, then switching to reverse and noting the meter reading, which is then compared with the forward reading, to obtain a ratio of forward to reverse power present on the line. The formula to calculate s.w.r. from forward full-scale-deflection ( $V_o$ ) against reflected power ( $V_R$ ) is as follows:

$$\text{s.w.r.} = \frac{V_o + V_R}{V_o - V_R}$$

For example,

$$\text{f.s.d.} = \frac{1 + 1}{1 - 1} = \frac{2}{0} = \infty$$

$$\frac{1}{2} \text{ f.s.d.} = \frac{1 + \frac{1}{2}}{1 - \frac{1}{2}} = \frac{\frac{3}{2}}{\frac{1}{2}} = \frac{3}{1} = 3:1$$

$$\text{Zero} = \frac{1 + 0}{1 - 0} = \frac{1}{1} = 1 = 1:1$$

The reverse scale reading can be compared with the information given in Table 1, so as to obtain a quick reference of actual v.s.w.r.

## The Mystery

Two lamps in what looks like a series circuit and yet, at zero v.s.w.r., one lamp lights and the other does not, how strange! So how does it work? The system works because there are in fact several currents in the loop, not one. The actual values of the inductive and capacitive currents are due to the wire making up one side of the bridge, having much tighter coupling to the adjacent wire in the feeder than it does to the wire further away.

## Capacitive Inductive Effects

The current due to capacitive coupling, which is not dependent on the direction in which the wave travels, passes through the two lamps in the same direction. This current has the same value and is in the same phase at both ends of the line, for waves travelling in either direction.

The currents due to inductive coupling, which is a vector action, are of different values and phase depending on whether they are generated by forward or reverse power. Therefore, in a line with zero v.s.w.r., the various currents cancel in one lamp, which stays out, and adds in the other, which is illuminated. In fact the circuit, although appearing to be a simple series loop, is actually far more complex than it first looks.

30 ►

Monitoring the electric field can be both fascinating and useful. The atmospheric potential varies with humidity, temperature, solar activity and convective cloud formation.

In summer, the "fair-weather" field reaches a peak in mid afternoon unless shower clouds develop. Large cumulus clouds passing over the antenna cause fluctuations and polarity reversals, which grow as shower clouds form. Distant lightning shows as sharp spikes on the trace, with amplitude increasing as the storm approaches.

Apart from forecasting thunderstorms, variations in background field foretell the approach of rain or other changes in the weather. A steady fall in potential several hours ahead of the normal daily cycle signals rain, and on a dull day, a further sharp fall in an already low voltage warns that rain is imminent. A steady rise in potential during drizzle or fog means better weather, and in winter, erratic "noise" accompanied by heavy cloud and falling potential forecast snow.

At night the field potential falls to a low level, unless thunderstorms threaten. Under these quiet conditions a trace at high gain will show occasional disturbances caused by solar events or ionospheric ripples caused by meteors burning up overhead. Another powerful source of disturbance is smoke. A nearby bonfire, or traffic exhaust can cause large erratic swings in the 1-10V range and give the impression of local instability associated with convection cloud building.

The electrometer also seems capable of registering seismic disturbances such as earthquakes and underground nuclear tests, both of these events having been monitored at the author's QTH. The exact mechanism by which the effects can be monitored is rela-

## SHOPPING LIST

### Resistors

<i>0.25W 2% Carbon film</i>		
330Ω	2	R1,2
4.7kΩ	1	R3

### Potentiometer Lin.

50kΩ	1	R4
------	---	----

### Capacitors

#### *Disc ceramic*

1nF	2	C1,2 (v.h.f.)
10nF	2	C1,2 (h.f.)

### Inductors

100µH	2	L1,2 (v.h.f.)
2.5mH	2	L1,2 (h.f.)

### Semiconductors

#### *Diodes*

1N914	2	D1,2
-------	---	------

### Miscellaneous

S1 s.p.d.t. toggle, M1 500µA f.s.d., connecting wire, 300Ω ribbon cable.

## SHOPPING LIST

### Resistors

#### *1W 5% Carbon film*

330Ω	1	R2
10kΩ	2	R8,9
220kΩ	1	R6
2.2MΩ	1	R1
4.7MΩ	1	R3
8.2MΩ	1	R5

### 4W Wirewound

1kΩ	1	R10
-----	---	-----

### Potentiometer Linear

250kΩ	1	R4
2.2MΩ	1	R7*

\*with single pole switch

### Capacitors

#### *Polyester 400V*

0.1µF	1	C1
0.47µF	1	C2

### Electrolytic 500V

10µF	2	C3,4
------	---	------

### Semiconductors

#### *Diodes*

1N4007	2	D1,2
--------	---	------

### Valves

6Q7GT/G	1	V1†
VR150/30	2	V2,3†

### Miscellaneous

T1 250V 100mA, 6.3V 500mA or similar<sup>(1)</sup>; 250V 1A toggle switches S1-4; International Octal valve holders (3)<sup>(2)</sup>; 6V panel lamp with holder and bezel; M1 see text<sup>(3)</sup>; SK1-3 4mm type with matching plugs; F1 1½in fuse with chassis mount holder; Plywood off-cut (baseboard); Single gap spark plug (must be unused); Hook-up wire; Terry clip; Knobs; Tag strip; Assorted hardware.

(1) Suitable surplus item (Part Code X075) available from:  
Greenweld Electronic Components, 443 Millbrook Road, Southampton SO1 0HX. Tel: 0703 772501.

(2) Electromail, PO Box 33, Corby, Northants NN17 9EL. Tel: 0536 204555.

(3) Meter shown in PW prototype is a 250-0-250µA, part code CZM250. Also available with a slightly smaller scale is a 50-0-50µA type, part code 30MP4. Both stocked by:  
Electrovalue, 28 St Judes Road, Englefield Green, Egham, Surrey TW20 0HB. Tel: 0784 33603.

† RST Mail Order Co., Langrex Supplies Ltd., 1 Mayo Road, Croydon, Surrey CR0 2QP. Tel: 01-684 1166.

† Colomor (Electronics Ltd.), 170 Goldhawk Road, London W12 8HN. Tel: 01-743 0899/01-749 3934.

† P.M. Components Ltd., Selectron House, Springhead Enterprise Park, Springhead Road, Gravesend, Kent DA11 8HD. Tel: 0474 60521.

tively complex, however, such changes in potential can be likened to those caused by distorting a piezoelectric substance.

Once installed, an antenna electrometer will give a fascinating insight into the complex electrical interchange between the ionosphere and the sur-

face of our planet. The major power source of this phenomenon is the avalanche of charged particles from the sun. Who knows, this may be yet another instrument by which those cherished DX windows may be forecast!



0202 678558

Practical Wireless

0202 678558



# BOOK SERVICE

The books listed have been selected as being of special interest to our readers. They are supplied from our editorial address direct to your door. Some titles are overseas in origin.

## HOW TO ORDER

Add 75p per order postage (overseas readers add £1.50 for surface mail postage) and send a postal order, cheque or international money order with your order (quoting book titles and quantities) to **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP**. Payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 678558. Books normally despatched by return of post but please allow 28 days for delivery.

★ A recent addition to our Book Service. O/P = Out of print, O/S = Out of stock.

## RADIO

### ★ AIR & METEO CODE MANUAL Joerg Klingenfuss 10th edition

Contains detailed description of the World Meteorological Organisation Global Telecommunication System operating FAX and RTTY meteo stations, and of its message format with decoding examples. Also contains detailed description of the Aeronautical Fixed Telecommunication Network amongst others. 293 pages £14.00

### BETTER RADIO/TV RECEPTION

A. Nallawalla, A. T. Cusden and

B. D. Clark

An Australian publication giving guidance and advice both to listeners seeking reliable reception of some distant radio station, and to DX listening hobbyists. 134 pages £9.95

### BETTER SHORTWAVE RECEPTION (USA)

W. S. Orr W6SAI & S. D. Cowan W2LX

Receivers, antennas, propagation, DX listening techniques for the short waves and v.h.f. 158 pages £5.50

### ★ PASSPORT TO WORLD BAND RADIO

This book gives you the information you need to explore and enjoy the world of broadcast band listening. It includes features on different international radio stations, receiver reviews and advice as well as the hours and language of broadcast stations by frequency. 398 pages O/S

### SCANNERS (updated)

Peter Rouse GU1DKD

A guide for users of scanning receivers, covering hardware, antennas, accessories, frequency allocations and operating procedure. 177 pages £7.95

### SCANNERS 2

Peter Rouse GU1DKD

The companion to Scanners, this provides even more information on the use of v.h.f. and u.h.f. communications band and gives constructional details for accessories to improve the performance of scanning equipment. 216 pages £9.95

### ★ SHORT WAVE RADIO LISTENERS' HANDBOOK

Arthur Miller

In easy-to-read and non-technical language, the author guides the reader through the mysteries of amateur, broadcast and CB transmissions. 207 pages £6.99

### ★ RADIOTELETYPE CODE MANUAL

10th Edition

Joerg Klingenfuss

This book provides detailed descriptions of the characteristics of telegraph transmission on short waves, with all commercial modulation types including voice frequency telegraphy. It provides comprehensive information on all RTTY systems and c.w. alphabets. 96 pages £8.00

### THE SATELLITE EXPERIMENTER'S HANDBOOK (USA)

A guide to understanding and using amateur radio, weather and TV broadcast satellites. 207 pages £9.25

## BEGINNERS

### AN INTRODUCTION TO RADIO DXING (BP91)

R. A. Penfold

How to find a particular station, country or type of broadcast and to receive it as clearly as possible. 112 pages £1.95

### BEGINNER'S GUIDE TO RADIO (9th Edition)

Gordon J. King

Radio signals, transmitters, receivers, antennas, components, valves and semiconductors, CB and amateur radio are all dealt with here. 266 pages £6.95

### BEGINNER'S GUIDE TO ELECTRONICS

Owen Bishop

For youngsters thinking of a career in electronics, theory and applications in computers, radio, TV, recording, medical and industrial electronics. 240 pages £5.95

### ELECTRONICS SIMPLIFIED—CRYSTAL SET CONSTRUCTION (BP92)

F. A. Wilson

This is a book especially written for those who wish to

take part in basic radio building. All the crystal sets in the book are from old designs but updated to take account of modern components. 72 pages. £1.75

### QUESTIONS & ANSWERS

RADIO

Eugene Trundle

Basics of electrical theory, radio and semiconductors, receivers, amateur and CB radio, and test equipment. 110 pages £3.95

### THE SIMPLE ELECTRONIC CIRCUIT AND COMPONENTS Book 1 (BP62)

The aim of this book is to provide an inexpensive but comprehensive introduction to modern electronics. 209 pages £3.50

## TELEVISION

### AN INTRODUCTION TO SATELLITE TELEVISION (BP195)

F. A. Wilson

Answers all kinds of questions about satellite television. For the beginner thinking about hiring or purchasing a satellite TV system there are details to help you along. For the engineer there are technical details including calculations, formulae and tables. Plenty of advice for the d.i.y. enthusiast. 104 pages. £5.95

### A TV-DXERS HANDBOOK (BP176)

R. Bunney

Information on transmission standards, propagation, receivers including multi-standard, colour, satellites, antennas, photography, station identification, interference, etc. Revised and updated 1986. 87 pages £5.95

### SATELLITE TELEVISION

Peter S. Pearson

How satellite TV works, setting up your own TVRO terminal, the costs, the programmes available. 72 pages £4.95

### GUIDE TO WORLD-WIDE TELEVISION TEST CARDS

Edition 2

Keith Hamer and Garry Smith

The main purpose of this book is to assist long distance television enthusiasts (TV DXers) around the world with signal identification. There are 240 test cards, identification slides and clock captions pictured. It is in "semi-alphabetical" order, that is the stations are in alphabetical order in their geographical sections. 52 pages £2.95

## THEORY

### AMATEUR RADIO & ELECTRONICS STUDY GUIDE

3rd Edition

Ian Ridpath ZL1BCG

This book aims to fill the gap between high level amateur radio handbooks and over-simplified beginners manuals. It is written in a "students own notes" format that hopes to put the reader more at ease than formally written text books do. 216 pages £7.00

### COMMUNICATION (BP89)

(Elements of Electronics—Book 5)

F. A. Wilson

Fundamentals of line, microwave, submarine, satellite, digital multiplex, radio and telephony systems are covered, without the more complicated theory or mathematics. 256 pages £2.95

### FOUNDATIONS OF WIRELESS AND ELECTRONICS (10th Edition)

M. G. Scroggie and S. W. Amos

Covering d.c. and a.c. circuits, L, C, tuned circuits and selectivity, valves, semiconductors, transmission lines, antennas, radiation, oscillation, modulation, detection, amplification, superhet receivers, c.r.t.s, waveform generators and switches, computers and power supplies. 551 pages £8.95

### LEVEL II RADIO & ELECTRONICS THEORY

Ian Ridpath ZL1BCG

A sequel to Amateur Radio & Electronics Study Course, this book covers advanced theory up to a level needed on most technician courses. The handwritten format is designed to make the student feel as though the pages are his own notes. 169 pages £6.70

### PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE (BP53)

F. A. Wilson

This has been written as a workshop manual for the

electronics enthusiast. There is a strong practical bias and higher mathematics have been avoided where possible. 249 pages £3.95

## LISTENING GUIDES

### AIR BAND RADIO HANDBOOK

David J. Smith

With air band radio you can eavesdrop on the conversations between aircraft and those on the ground who control them. The author, an air traffic controller, explains more about this listening hobby. 174 pages £5.99.

### FLIGHT ROUTINGS 1988

T. T. Williams

Identifies the flights of 168 airlines, schedule, charter, cargo and mail, to and from the UK and Eire and overflights between Europe and America. 104 pages £4.00

### DIAL SEARCH (5th Edition 1988/89)

George Wilcox

The listener's check list and guide to European broadcasting. Covers medium wave, long wave, v.h.f. and short wave, including two special maps, making the most of your portable and many more. 46 pages £3.25

### AIR TRAFFIC CONTROL

David Adair

A guide to air traffic control with maps, drawings and photographs explaining how aircraft are guided through crowded airspace. 176 pages £6.99

### GUIDE TO BROADCASTING STATIONS

19th Edition (1987/88)

Philip Darrington

Frequency and station data, receivers, antennas, Latin American DXing, reporting, computers in radio, etc. 240 pages £6.95

### ★ GUIDE TO FACSIMILE STATIONS

8th Edition

Joerg Klingenfuss

This manual is the basic reference book for everyone interested in FAX. Frequency, callsign, name of the station, ITU country/geographical symbol, technical parameters of the emission are all listed. All frequencies have been measured to the nearest 100Hz. 262 pages £12.00

### GUIDE TO FORMER UTILITY TRANSMISSIONS

3rd Edition

Joerg Klingenfuss

This manual is built on continuous monitoring of the radio spectrum from the sixties until the recent past. It is a useful summary of former activities of utility stations and provides information to the active radio monitor in the classification and identification of radio signals. 126 pages £8.00

### GUIDE TO UTILITY STATIONS

6th Edition

Joerg Klingenfuss

This book covers the complete short wave range from 3 to 30MHz plus the adjacent frequency bands from 0 to 150kHz and from 1.6 to 3MHz. It includes details on all types of utility stations including FAX and RTTY. There are 15802 entries in the frequency list and 3123 in the alphabetical callsign list plus press services and meteorological stations. 494 pages £19.00

### HF OCEANIC AIRBAND COMMUNICATIONS (3rd Edn.)

Bill Laver

Aircraft channels by frequency and band, main ground radio stations, European R/T networks, North Atlantic control frequencies. 29 pages £3.50

### ★ INTERNATIONAL RADIO STATIONS GUIDE (BP255)

Updated and completely re-written in June 1988. It provides the casual listener and DXer with an essential reference work designed to guide them around the ever more complex radio bands. 312 pages £4.95

### THE COMPLETE VHF/UHF FREQUENCY GUIDE

Updated 1988

This book gives details of frequencies from 26–2250MHz with no gaps and who uses what. Recently updated, there are chapters on equipment requirements as well as antennas, etc. 88 pages £5.95

## THE INTERNATIONAL VHF FM GUIDE

7th Edition

**Julian Baldwin G3UHK & Kris Partridge G8AUU**

The latest edition of this useful book gives concise details of repeaters and beacons worldwide plus coverage maps and further information on UK repeaters. 70 pages £2.85

## UK LISTENERS CONFIDENTIAL FREQUENCY LIST (5th Edition)

**Bill Laver**

Covering the services and transmission modes that can be heard on the bands between 1.635 and 29.7MHz. 147 pages £6.95

## VHF/UHF AIRBAND FREQUENCY GUIDE (Second edition)

A complete guide to the airband frequencies including how to receive the signals, the frequencies and services, VOLMET and much more about the interesting subject of airband radio. 74 pages £5.95

## WORLD RADIO TV HANDBOOK 1988

Country-by-country listings of long, medium and short wave broadcasters and TV stations. Receiver test reports, English language broadcasts. The s.w.l.'s "bible". 576 pages £17.95

## INTERFERENCE

### INTERFERENCE HANDBOOK (USA)

**William R. Nelson WA6FQG**

How to locate and cure r.f.i. for radio amateurs, CBers and TV and stereo owners. 253 pages £6.75

### RADIO FREQUENCY INTERFERENCE (USA)

What causes r.f.i.? Are all r.f.i. problems difficult, expensive and time-consuming to cure? These questions and many more are answered in this book. 84 pages £4.30

### TELEVISION INTERFERENCE MANUAL (RSGB)

**B. Priestley**

TV channels and systems, spurious-radiation TVI, strong-signal TVI, audio breakthrough, transmitter design. 78 pages £2.94

## AMATEUR RADIO

### AMATEUR RADIO CALL BOOK (RSGB)

Winter 87/88 Edition

This useful work now incorporates a 48-page reference section of useful information for amateur radio enthusiasts. 310 pages £7.25

### AMATEUR RADIO LOGBOOK

Standard logbook for the transmitting amateur in horizontal A4 format. 25 lines per page. 96 pages £2.30

### AMATEUR RADIO OPERATING MANUAL (RSGB)

A mine of information on just about every aspect of amateur operating, including international callsign series holders, prefix lists, DXCC countries list, etc. 204 pages £6.16

### AMATEUR RADIO SATELLITES the first 25 years

**Arthur C. Gee G2UK**

The material in this souvenir publication is drawn from the author's archives. It is mainly a pictorial account on the pattern of developments which have occurred over the last 25 years. 34 pages £2.25

### CARE AND FEEDING OF POWER GRID TUBES (USA)

This handbook analyses the operation of EIMAC power grid valves and provides design and application information to assist the user of these valves. 156 pages £6.75

### HOW TO PASS THE RADIO AMATEURS' EXAMINATION (RSGB)

**G. L. Benbow G3HB**

The background to multiple choice exams and how to study for them with nine sample RAE papers for practice, plus maths revision. 91 pages £3.00

### PASSPORT TO AMATEUR RADIO

Reprinted from PW 1981-1982

The famous series by GW3JGA, used by thousands of successful RAE candidates as an aid to their studies. Plus other useful articles for students of amateur radio. 96 pages £1.50

### QUESTIONS & ANSWERS

#### AMATEUR RADIO

**F. C. Judd G2BCX**

What is amateur radio? The Radio Amateurs' Exam and Licence. The technology, equipment, antennas, operating procedure and codes used by amateurs. 122 pages £3.95

### RADIO AMATEUR'S GUIDE RADIO WAVE PROPAGATION (HF Bands)

**F. C. Judd G2BCX**

The how and why of the mechanism and variations of propagation in the h.f. bands. 144 pages £8.95

### RADIO AMATEUR'S MAP OF NORTH AMERICA (USA)

Shows radio amateurs' prefix boundaries, continental boundaries and zone boundaries. 760 x 636mm £2.50

### RADIO AMATEUR'S

#### PREFIX MAP OF THE WORLD (USA)

Showing prefixes and countries, plus listings by order of country and of prefix. 1014 x 711mm £2.95

### RADIO AMATEUR'S WORLD ATLAS (USA)

17 pages of maps, including the world-polar projection. Also includes the table of allocation of international callsign series. £3.50

### THE RADIO AMATEUR'S DX GUIDE (USA)

15th Edition

The guide contains information not easily obtained

elsewhere and is intended as an aid and quick reference for all radio amateurs interested in DX. 38 pages £2.95

## THE RADIO AMATEUR'S QUESTIONS & ANSWER REFERENCE MANUAL 3rd Edition

**R.E.G. Petri G8CCJ**

This book has been compiled especially for students of the City and Guilds of London Institute RAE. It is structured, with carefully selected multiple choice questions, to progress with any recognised course of instruction, although it is not intended as a text book. 258 pages £6.95

## THE 1988 ARRL HANDBOOK FOR THE RADIO AMATEUR

This, the sixty-fifth edition is available only in hardback, the first time the ARRL have done this. New construction projects are the theme of this edition, there is a deluxe memory keyer, receiver projects, a linear QSK converter, a low-powered balanced Transmatch and a d.t.m.f. decoder. Updated every year, this provides useful reference material for the radio amateur. It also includes 18 pages of p.c.b. track pattern for you to build your own boards. 1157 pages £19.25 (hardback)

## VHF HANDBOOK FOR RADIO AMATEURS (USA)

**H. S. Brier W9EGQ & W. I. Orr W6SAI**

VHF/UHF propagation, including moonbounce and satellites, equipment and antennas. 335 pages £7.95

## VHF/UHF MANUAL (RSGB)

**G. R. Jessop G6JP**

Theory and practice of amateur radio reception and transmission, between 30MHz and 24GHz. 520 pages £7.95

## DATA & REFERENCE

### DIGITAL IC EQUIVALENTS AND PIN CONNECTIONS (BP140)

**A. Michaels**

Equivalents and pin connections of a popular selection of European, American and Japanese digital i.c.s. 256 pages £5.95

### INTERNATIONAL DIODE EQUIVALENTS GUIDE (BP108)

**A. Michaels**

Possible substitutes for a large selection of many different types of semiconductor diodes. 144 pages £2.25

### INTERNATIONAL TRANSISTOR EQUIVALENTS GUIDE (BP85)

**A. Michaels**

Possible substitutes for a popular selection of European, American and Japanese transistors. 320 pages £3.50

### LINEAR IC EQUIVALENTS AND PIN CONNECTIONS (BP141)

**A. Michaels**

Equivalents and pin connections of a popular selection of European, American and Japanese linear i.c.s. 320 pages £5.95

### NEWNES AUDIO & HI FI ENGINEER'S POCKET BOOK

**Vivian Capel**

The is a concise collection of practical and relevant data for anyone working on sound systems. The topics covered include microphones, gramophones, CDs to name a few. 190 pages Hardback £9.95

### NEWNES COMPUTER ENGINEER'S POCKET BOOK

**A. Michaels**

This is an invaluable compendium of facts, figures, circuits and data and is indispensable to the designer, student, service engineer and all those interested in computer and microprocessor systems. 203 pages Hardback £8.95

### NEWNES ELECTRONICS POCKET BOOK 5th Edition

**A. Michaels**

Presenting all aspects of electronics in a readable and largely non-mathematical form for both the enthusiast and the professional engineer. 315 pages Hardback £8.95

### NEWNES RADIO AMATEUR AND LISTENER'S POCKET BOOK

**Steve Money G3FZX**

This book is a collection of useful and intriguing data for the traditional and modern radio amateur as well as the short wave listener. Topics such as AMTOR, packet radio, SSTV, computer communications, airband and maritime communications are all covered. 160 pages Hardback £8.95

### NEWNES RADIO AND ELECTRONICS ENGINEER'S POCKET BOOK (17th Edition)

**Keith Brindley**

Useful data covering maths, abbreviations, codes, symbols, frequency bands/allocations, UK broadcasting stations, semiconductors, components, etc. 201 pages Hardback £6.95

### ★ NEWNES TELEVISION AND VIDEO ENGINEER'S POCKET BOOK

**Eugene Trundle**

This is a valuable reference source for practitioners in "entertainment" electronic equipment. It covers TV reception from v.h.f. to s.h.f., display tubes, colour camera technology, video recorder and video disc equipment, video text and hi-fi sound. 323 pages Hardback £9.95

### POWER SELECTOR GUIDE (BP235)

**J. C. J. Van de Ven**

This guide has the information on all kinds of power devices in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 160 pages £4.95

## RSGB RADIO DATA REFERENCE BOOK

**G. R. Jessop G6JP**

The 5th Edition of an essential book for the radio amateur's or experimenter's workbench. 244 pages Hardback £8.56

## SEMICONDUCTOR DATA BOOK

**A. M. Ball**

Characteristics of about 10 000 transistors, f.e.t.s, u.j.t.s, diodes, rectifiers, triacs and s.c.r.s. 175 pages £9.95

## TRANSISTOR SELECTOR GUIDE (BP234)

**J. C. J. Van de Ven**

This guide has the information on all kinds of transistors in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 192 pages £4.95

## FAULT-FINDING

### ARE THE VOLTAGES CORRECT?

Reprinted from PW 1982-1983

How to use a multimeter to fault-find on electronic and radio equipment, from simple resistive dividers through circuits using diodes, transistors, i.c.s and valves. 44 pages £1.50

## GETTING THE MOST FROM YOUR MULTIMETER (BP239)

**R. A. Penfold**

This book is primarily aimed at beginners. It covers both analogue and digital multimeters and their respective limitations. All kinds of testing is explained too. No previous knowledge is required or assumed. 102 pages £2.95

## \* MODERN ELECTRONIC TEST EQUIPMENT

**Keith Brindley**

This book describes in a down-to-earth manner how the main categories of test equipment work. The subjects covered include analogue and digital meters, oscilloscopes, signal sources, frequency, time and event counters, spectrum and logic analysers, displays and automatic test equipment. 134 pages £6.95

## OSCILLOSCOPES, HOW TO USE THEM, HOW THEY WORK (Revised 2nd Edition)

**Ian Hickman**

This book describes oscilloscopes ranging from basic to advanced models and the accessories to go with them. 133 pages £6.95

## PRACTICAL HANDBOOK OF VALVE RADIO REPAIR

**Chas E Miller**

The definitive work on repairing and restoring valued broadcast receivers dating from the 1930s to the 60s. Appendices giving intermediate frequencies, valve characteristic data and base connections. 230 pages Hardback £17.50

## QUESTIONS & ANSWERS

### RADIO REPAIR

**Les Lawry-Johns**

How to fault-find and repair valved and transistorised receivers, car radios and unit audio equipment. Suggested lists of tools and spare parts. 106 pages £3.95

## SERVICING RADIO, HI-FI AND TV EQUIPMENT

**Gordon J King**

A very practical book looking at semiconductor characteristics, d.c. and signal tests, fault-finding techniques for audio, video, r.f. and oscillator stages and their application to transistor radios and hi-fi. 205 pages £9.95

## TRANSISTOR RADIO FAULT FINDING CHART (BP70)

**C. E. Miller**

Used properly, should enable most common faults to be traced reasonably quickly. Selecting the appropriate fault description at the head of the chart, the reader is led through a sequence of suggested checks until the fault is cleared. 635 x 455mm (approx) £0.95

## PROJECT CONSTRUCTION

### HOW TO BUILD ADVANCED SHORT WAVE RECEIVERS (BP226)

**R. A. Penfold**

Greater satisfaction can be gained from the hobby of shortwave listening when using home constructed equipment. This book gives full practical constructional details of a number of receivers as well as some add-on circuits like S-meters and noise limiters. 118 pages £2.95

## HOW TO DESIGN AND MAKE YOUR OWN P.C.B.s (BP121)

**R. A. Penfold**

Designing or copying printed circuit board designs from magazines, including photographic methods. 80 pages £1.95

## INTRODUCING QRP

Collected Articles from PW 1983-1985

An introduction to low-power transmission, including constructional details of designs by Rev. George Dobbs G3RJV for transmitters and transceivers from Top Band to 14MHz, and test equipment by Tony Smith G4FAI. 64 pages £1.50

## MORE ADVANCED POWER SUPPLY PROJECTS (BP192)

**R. A. Penfold**

The practical and theoretical aspects of the circuits are covered in some detail. Topics include switched mode power supplies, precision regulators, dual tracking regulators and computer controlled power supplies, etc. 92 pages £2.95

## POWER SUPPLY PROJECTS BP76

R. A. Penfold

This book gives a number of power supply designs including simple unstabilised types, fixed voltage regulated types and variable voltage stabilised designs. 91 pages £2.50

## PRACTICAL POWER SUPPLIES

Collected Articles from PW 1978-1985

Characteristics of batteries, transformers, rectifiers, fuses and heat sinks, plus designs for a variety of mains-driven power supplies, including the PW 'Marchwood' giving a fully stabilised and protected 12V 30A d.c. 48 pages £1.25

## PROJECTS IN AMATEUR RADIO AND SHORT WAVE LISTENING

F. G. Rayer G3OGR

Full constructional details are given for all projects, including housing the units in a suitable case. All the projects are either on p.c.b. or matrix board. 90 pages £4.95

## \* QRP NOTEBOOK

Doug DeMaw W1FB

This book deals with the building and operating of a successful QRP station. Lots of advice is given by the author who has spent years as an ardent QRPer. All the text is easy to read and the drawings are large and clear. 77 pages £3.95

## SOLID STATE SHORT WAVE RECEIVERS FOR BEGINNERS (BP222)

R. A. Penfold

There is a strange fascination in listening to a broadcast which has been transmitted over many thousands of kilometres. This is even more the case when you've built the receiver yourself. This book contains several designs that will give a fairly high level of performance. 93 pages £2.95

## AUDIO FREQUENCIES

### AUDIO (BP111)

(Elements of Electronics—Book 6)

F. A. Wilson

This book studies sound and hearing, and the operation of microphones, loudspeakers, amplifiers, oscillators, and both disc and magnetic recording. 320 pages £3.50

## ANTENNAS (AERIALS)

### AERIAL PROJECTS (BP105)

R. A. Penfold

Practical designs including active, loop and ferrite aerials plus accessory units. 96 pages £1.95

### ALL ABOUT CUBICAL QUAD ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowen W2LX

Theory, design, construction, adjustment and operation of quads. Quads vs. Yagis. Gain figures. 109 pages O/S

### ALL ABOUT VERTICAL ANTENNAS (USA)

W. I. Orr W6SAI and S. D. Cowen W2LX

Theory, design, construction, operation, the secrets of making vertical work. 191 pages £7.50

### AN INTRODUCTION TO ANTENNA THEORY (BP198)

H. C. Wright

This book deals with the basic concepts relevant to receiving and transmitting antennas. Lots of diagrams

reduce the amount of mathematics involved. 86 pages £2.95

## BEAM ANTENNA HANDBOOK (USA)

W. I. Orr W6SAI & S. D. Cowen W2LX

Design, construction, adjustment and installation of h.f. beam antennas. 198 pages £6.75

## OUT OF THIN AIR

Collected Antenna Articles from PW 1977-1980

Including such favourites as the ZL Special and '2BCX 16-element beams for 2m, and the famous "Slim Jim", designed by Fred Judd G2BCX. Also features systems for Top Band, medium wave/long wave loop designs and a v.h.f. direction finding loop. Plus items on propagation, accessories and antenna design. 80 pages £1.80

## SIMPLE, LOW-COST WIRE ANTENNAS FOR RADIO AMATEURS (USA)

W. I. Orr W6SAI and S. D. Cowen W2LX

Efficient antennas for Top Band to 2m, including "invisible" antennas for difficult station locations. 191 pages £6.75

## THE ARRL ANTENNA BOOK

15th Edition (USA)

A station is only as effective as its antenna system. This book covers propagation, practical constructional details of almost every type of antenna, test equipment and formulas and programs for beam heading calculations. 327 pages £14.95

## THE ARRL ANTENNA COMPENDIUM Volume 1 (USA)

This book makes fascinating reading of hitherto unpublished material. Among topics discussed are quads and loops, log periodic arrays, beam and multi-band antennas, verticals and reduced size antennas. 175 pages £9.25

## THE RADIO AMATEUR ANTENNA HANDBOOK

William I. Orr W6SAI & Stuart D. Cowen W2LX

Yagi, quad, quagi, l-p, vertical, horizontal and "sloper" antennas are all covered. Also towers, grounds and rotators. 190 pages £6.75

## TWO-METRE ANTENNA HANDBOOK

F. C. Judd wrote this book for radio amateurs new to the 144-146MHz band. The range of antennas described will cater for most situations, particularly those where space is a problem. 157 pages £6.95

## WIRES & WAVES

Collected Antenna Articles from PW 1980-1984

Antenna and propagation theory, including NBS Yagi design data. Practical designs for antennas from medium waves to microwaves, plus accessories such as a.t.u.s., s.w.r. and power meters, and a noise bridge. Dealing with TVI. 160 pages £3.00

## \* W1FB'S ANTENNA NOTEBOOK

Doug DeMaw W1FB

This book provides lots of designs, in simple and easy-to-read terms, for simple wire and tubing antennas. All drawings are large and clear making construction much easier. 124 pages O/S

## 25 SIMPLE AMATEUR BAND AERIALS (BP125)

E. M. Noll

How to build 25 simple and inexpensive aerials, from a simple dipole through beam and triangle designs to a mini-rhombic. Dimensions for specific spot frequencies, including the WARC bands. 80 pages £1.95

## 25 SIMPLE INDOOR AND WINDOW AERIALS (BP136)

E. M. Noll

Designs for people who live in flats or have no gardens, etc., giving surprisingly good results considering their limited dimensions. 64 pages £1.75

## 25 SIMPLE SHORT WAVE BROADCAST BAND AERIALS (BP132)

E. M. Noll

Designs for 25 different aerials, from a simple dipole through helical designs to a multi-band umbrella. 80 pages £1.95

## 25 SIMPLE TROPICAL AND MW BAND AERIALS (BP145)

E. M. Noll

Simple and inexpensive aerials for the broadcast bands from medium wave to 49m. 64 pages £1.75

## COMPUTING

### AMATEUR RADIO SOFTWARE (RSGB)

John Morris GM4ANB

Using a computer for c.w., RTTY, data, plus calculations for antennas, distance, bearing, locators, satellites, sun, moon and circuit design. 328 pages Hardback £7.04

## AN INTRODUCTION TO COMPUTER COMMUNICATIONS (BP177)

R. A. Penfold

Details of various types of modem and their applications, plus how to interconnect computers, modems, and the telephone system. Also networking systems and RTTY. 96 pages £2.95

## AN INTRODUCTION TO COMPUTER PERIPHERALS (BP170)

J. W. Pentfold

Covers monitors, printers, disk drives, cassette recorders, modems, etc., explaining what they are, how to use them and the various types of standards. 80 pages £2.50

## MICROPROCESSING SYSTEMS AND CIRCUITS (BP77)

(Elements of Electronics—Book 4)

F. A. Wilson

A comprehensive guide to the elements of microprocessing systems, which are becoming ever more involved in radio systems and equipment. 256 pages £2.95

## MORSE

### INTRODUCING MORSE

Collected Articles from PW 1982-1985

Ways of learning the Morse Code, followed by constructional details of a variety of keys including Lambic, Triambic, and an Electronic Bug with a 528-bit memory. 48 pages £1.25

## THE SECRET OF LEARNING MORSE CODE

Mark Francis

Designed to make you proficient in Morse code in the shortest possible time, this book points out many of the pitfalls that beset the student. 87 pages £4.95

## SWAP SPOT

Have Yashica 8T cine camera with twin turret D-mount screw-in lenses, normal F1.4-13mm and telephoto F1.4-38mm, plus handbook and carrying case. All in good condition. Would exchange for 13.9V d.c. p.s.u. or w.h.y? Tel: Reading (0704) 588503 E766

Have Steepletone MBR-7 h.f. receiver and Amstrad MCD-7 CD/cassette/receiver. Would exchange for good scanning receiver. D. Smith Tel: 0843 597895 (evenings/weekends), 0227 761261 (day time) E796

Have 30 years Practical Wireless to date, including many enclosures (8 missing) plus 9 years of Television magazine. Would exchange for fair quality Morse key and oscillator plus Morse tutor tapes and information on passing RAE. Tel: 0664 840 764 E799

Have Yaesu FT-757GX plus matching p.s.u. and auto a.t.u., boxed as new (4 QSOs old). Would exchange for basic solid state h.f. rig plus adjustment. Garry. Tel: 0625 530200 E803

Have Standard C-58 multimode 144MHz mobile/portable, 5 memories for mode and step plus scanning, etc., with case, strap, mic, antenna, NiCads, mobile quick mount and mobile mic. Would exchange for FT-23 144MHz f.m. hand-held. Garry. Tel: 0625 530200 E803a

Have Chinon CE3 auto/manual SLR camera with Zeiss 50mm F1.8 auto lens and 135mm manual lens plus dedicated power winder. Would exchange for terminal unit, h.f. receiver, 50MHz transverter or w.h.y? Alan GIEBH. Tel: 0268 45573 evenings E804

Have crystal set, 1920's Gecophone style, working with original cat's whisker, basket wound coil and period Brown's "A" headphones (plaited wires). Would exchange for good SLR camera. Mann. Tel: Cambridge 860150 E805

Got a camera, want a receiver? Got a v.h.f. rig, want some h.f. gear to go with your new G-zero? In fact, have you got anything to trade radio-wise?

If so, why not advertise it FREE here. Send details, including what equipment you're looking for, to "SWAP SPOT", Practical Wireless, Enetc House, The Quay, Poole, Dorset BH15 1PP, for inclusion in the first available issue of the magazine.

A FEW SIMPLE RULES: Your ad. should follow the format of those appearing below, it must be typed or written in black letters, it must be not more than 40 words long including name and address/telephone number. Swaps only—no items for sale—and one of the items MUST be radio related. Adverts for ILLEGAL CB equipment will not be accepted.

The appropriate licence must be held by anyone installing or operating a radio transmitter

Have Tristar 777 transceiver converted to 28MHz band, has a.m., f.m., s.s.b. modes plus 100W linear amplifier. Would exchange or part exchange for 144MHz f.m. or multimode rig, communications receiver or scanner. John G4XY. Tel: 0937 844197 E816

Have IC-505 50MHz multimode transceiver 0.5W-10W output in v.g.c. Would exchange for h.f. transceiver FT-101, FT-707 or similar. Tel: 0384 65614 E820

Have Grundig Satellit 208/6000 1.6-30MHz battery/mains receiver also army spark-gap TX and many other vintage goodies. Send stamps for full list. Would exchange for Sony ICF-7600 and variable pitch cassette deck. 25 Glenmore Road, Birkenhead. Tel: 051 652 8799 E835

Have lots of i.c.s. components, meters. Send for lists. Would exchange for urgently needed counter i.c. type AY-5-8100 and 1.28MHz crystal. S.K. Lai, 172, JLN Hujan Emas 4, BKT Indah, JLN Klang Lama, Kuala Lumpur, Malaysia E840

Have Olympus OM-10 SLR plus 50mm F1.8, 135mm F3.5, 28mm F2.8 lenses plus Hanimex PRO-550 flash together with filters etc. Would exchange for Yaesu, Trio or other quality h.f. receiver. Mr. C. D. Tong, 36 Bryant Road, Strood, Rochester, Kent ME2 2ES E842

**M**ERLIN

MERLIN WAY, BOWERHILL,  
MELKSHAM, WILTSHIRE SN12 6TJ.  
Tel: 0225 706886.

**S**YSTEMS

Look out for Merlin Systems at the following rallies and exhibitions, North Wales Amateur Radio Show 5, 6 NOV. Bridgend Amateur Radio Rally 20 NOV. You may also call at the Warehouse but please ring first.

#### NEW SYSTEM

MERLIN SYSTEMS PC Turbo 256K Ram, 8088 CPU, 1 Diskdrive, Hires Mono Monitor, 84 Keyboard, Par printer port, Radio and MSDos software and Merlin Systems backup. £450.00 + £15.00 P&P.

#### COMPUTER DESK

Up Market desk L 102cm x W 74cm x H 74cm with keyboard recess and cableing trunking. New only £50.00 + £16.00 P&P.

#### IBM PC CARDS

PC Express Card (300% speed increase). Megaram Card room for up to 2 meg of Ram. Multi IO Card 2 RS232 Ports, 1 Parallel Port, RTC, room for 512K of Ram. All cards new, complete with software and manuals. £38 each (+ £3.00 p&p).

#### 2nd USER SYSTEMS

BBC B with DFS one 40 track SS drive. £250.00. BBC + 128K 1770 DFS, S way rom, one 40 track DS drive. £350.00. IOTEC IONA 64K CPM 2.2.2 40 track DS drives. £160.00. Apple II+ with one disk drive and software. £150.00. FRANKLIN ACE 1000 with disk drive and software this is a Apple compatible. £150.00. P&P £10.00.

#### COMPUTER PARTS

APPLE cards, S100 cards, PSUs, NEW 12 inch green screen composite input Hires open frame monitor, only needs 12 volts DC. £30.00. P&P £5.00.

#### NEW

Made by well known Japanese manufacturer, twin cassette mechanism, complete with stereo heads, counter doors and leads only £6.00 P&P £1.00. Complete working LW, MW, FM, stereo music center PCB (the cassette plugs in) only £5.00 P&P £1.50.

#### RADIAL ELECTROLYTICS

10 x 4.7uf 25v	30p	5 x 3300uf 25v	1.30
10 x 22uf 10v	30p	2 x 3400uf 40v	75p
10 x 22uf 25v	35p	1 x I.E.C. 1amp mains filter socket	1.25
10 x 47uf 25v	35p	1 x I.E.C. 3amp mains filter socket	1.50
10 x 47uf 35v	40p	1 x I.E.C. 5amp mains filter socket	1.75
5 x 47uf 25v	60p	5 x push latching pcb switches	70p
10 x 100uf 10v	35p	5 x slide pcb switches	70p
10 x 220uf 10v	35p	10 x phono plugs	50p
10 x 220uf 16v	35p	5 x 240v panel neons	70p
10 x 220uf 25v	40p	5 x 24v panel lamps	70p
10 x 220uf 40v	45p	5 x MES lamp holders	50p
10 x 220uf 50v	45p	5 x 2way 3pole switches with knobs	1.20
10 x 470uf 25v	35p	4 x 4way dill switches	30p
10 x 470uf 50v	50p	5 x 1.7amp 200v bridge rectifiers	1.20
10 x 1000uf 25v	35p	3 x 1amp 50v bridge rectifiers	50p
		10 x 5mm x 2mm red leds	1.00
		3 x 5mm x 2mm green leds	1.00

**PAYMENT:** Credit card, cheque, PO, cash. Post and Packing, up to £10.00 add £1.50, £10.00 to £20.00 add £1.00. Please add VAT to total.



## SPECTRUM COMMUNICATIONS MANUFACTURERS OF RADIO EQUIPMENT AND KITS

**CB TO 10 FM CONVERSION BOARDS**, for rigs with LC7137 and TC9119 to give 29.31 to 29.70MHz. Built and aligned board SC29 £18.50. Or send your rig and we'll fit it £31.50 inc P&P, £35 inc P&P for base rigs. For rigs with MM55108 use SC29F board £15, or £28 fitted.

**MULTIMODE CB CONVERSIONS**, send your rig and we'll convert it. 80 CH rigs converted to give 28.01-28.80 or 28.41-29.7MHz depending upon type £55. 120CH rigs converted to give 28.01-29.70MHz, £62 for mobiles & £65 for base rigs. 200 CH rigs in 4 bands of 50 CH give 28.01-30.00MHz, £45. Others. Nato 2000 £52.50, SuperStar 2000 5x40 CH £77, Colt 1600 £65.50. All prices inc carriage.

**FM CONVERSIONS FOR YAESU & KENWOOD**, for rigs with AM £71 boards or £115 fitted, rigs without AM £81 boards or £125 fitted. Add £16 for Valve only rigs. State rig type when ordering.

**RECEIVE PREAMPS**, 2, 4, 6, or 10 metres. RF switched and DC sensing. 100W power handling, gain panel adjustable 0-20dB, NF 1dB on 2m, 4m & 6m 3.5dB on 10m. 13.5V negative ground operation. Excellent performance at a reasonable price. Types RP2S, RP4S, RP6S, & RP10S. PCB kit £14.75, PCB built £22.25, Boxed kit £25, Built & tested £35.50.

**TRANSVERTER**, single board 1/2W out for 2m or 4m or 6m, 10m drive 25mW-500mW. Types TRC2-10, TRC4-10, or TRC6-10. PCB kit £39, PCB built £54, Boxed kit £54, Built & tested £83.25.

**TRANSVERTER**, receive converter and 2.5W transmit converter in single boxed unit. 10m drive 10-100mW unbuffered, types TRX4-10H & TRX6-10H. Boxed kit £60, Built & tested £99.50. Buffered types for use with 10m rigs giving -6dBm drive, TRX410B & TRX6-10B, Boxed kit £68, Built & tested £115. With interface unit for use with 2m drive 1/2W-5W types TRX4-10I & TRX6-10I, Boxed kit £68, Built & tested £115.

**FREQUENCY MOD-DEMOD BOARD** converts AM only synthesized rigs with 455 KHz IF to FM. Type FM455. PCB kit £8.25, PCB built £12.25.

**NOISE SQUELCH**, mutes rig when noise is too high. Allows reception of weak signals between noise bursts. PCB kit £9.50, PCB built £14.

**TRANSMIT AMPLIFIERS**, linear single stage, gain 10dB, 30W output, ideal for FT290, FT690, etc. RF switched and DC sensing. Types TA2S1, TA4S1, & TA6S1, PCB kit £33, PCB built £40.25, Boxed kit £39, Box built £49.50.

**TRANSMIT AMPLIFIERS**, linear two stage 1/2W in 20/30W out, unswitched, suitable for MEON. Types TA2U2, TA4U2, & TA6U2, PCB kit £41.25, PCB built £52.50, Boxed kit £45. Boxed kit £59.25. Switched version for use with Spectrum transverter, types TA2S2, TA4S2, & TA6S2, PCB kit £47. PCB built £60, Boxed kit £58.25, Boxed built £72.50.

VAT & P&P INC PRICES  
Delivery within 14 days if available  
24 hr answering.

SHOP TIMES: 9am-1pm & 2pm-5pm TUES-FRI  
9am-1pm & 2pm-4pm SAT  
CLOSED SUNDAY & MONDAY

UNIT B6, MARABOUT INDUSTRIAL ESTATE,  
DORCHESTER, DORSET. TEL: 0305 62250



# NEVADA


THE UK's SCANNER SPECIALISTS

## JUST ARRIVED THE NEW BLACK JAGUAR MkIII



Switchable between AM/FM  
Base & mobile charging  
Frequency range -  
26-30MHz, 60-88MHz,  
115-178MHz, 210-260MHz,  
410-520MHz

**£235**

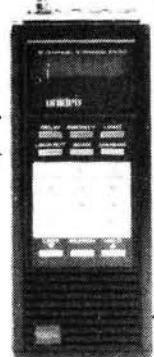

Hand held scanner  
with 200 channels.  
Memory scan covering:  
29-54 MHz, 118-174 MHz,  
405-512 MHz, 806-956 MHz (with gaps).

**£249.00**



**55 XL  
Bearcat**

NEW Base station scanning Rx  
with 20 channel memory scan  
covering 30-50MHz,  
136-174MHz, 406-512 MHz  
12 Volt or mains

**£179.99**



A super NEW low cost  
handheld scanner with  
10 memories and covers -  
29-54 MHz, 136-174 MHz,  
406-512MHz **£99.99**

**Bearcat 800 XLT**

40 Channel Base Scanner  
Covers 29-54MHz, 118-174MHz,  
406-512MHz, 806-912MHz.  
Complete with AC adaptor

**£229**

**NEW 580 XLT  
Bearcat**



**£149.99**

100 Memory channels covers:  
29-54 MHz, 118-174, 410-512 MHz

**£199** Requires 12V DC supply




USE YOUR CREDIT CARD FOR IMMEDIATE DESPATCH

**HOTLINE (0705) 662145**

NEVADA COMMUNICATIONS

189 London Road, North End,  
Portsmouth PO2 9AE. Telex: 869107

★★THE LEICESTER★★  
AMATEUR RADIO  
SHOW COMMITTEE



INVITE YOU TO THE

NATIONAL  
AMATEUR RADIO AND ELECTRONICS  
EXHIBITION

AT THE

GRANBY HALLS  
LEICESTER



ON  
**FRIDAY &  
SATURDAY  
OCTOBER  
28th & 29th  
10.00 am – 6.00 pm**

*BRING & BUY  
STAR RAFFLE*

Admission—ADULTS £1  
*Concessions for  
Children and O.A.P.s*

Enquiries to Frank G4PDZ on 0533 553293

# Computing Corner

Due to an apparent lack of development concerning most micros common in Amateur Radio, this issue will have to concentrate upon one major development affecting Spectrum users. More of that in a little while.

Commodore users may be interested to know that a Commodore Radio Users Group has been formed under the guidance of Simon Lewis GM4PLM. They have a 4/year newsletter, a wide software library and intend to cater for all CBM machines from PETs to AMIGAs. For an application form or more information please write to the address given below<sup>(i)</sup>. Please remember to enclose an s.a.e. or valid IRCs.

As I indicated in several previous issues, I am hoping to review a brand-new multimode-mode intelligent terminal unit with a special eye on use with the Sinclair and Amstrad CPC machines. I'm pleased to say that thanks to AMDAT<sup>(ii)</sup>, this unit is now with me and under review. More of that in the next Computing Corner.

Users of the CPC Packet-controller program featured several issues ago might like to note this little mod which should be made if the program is to be used with digipeaters having "The-Net" software rather than NETROM. This is more likely to affect continental users at present I gather. This is the change:

RUN "PTE.. when it runs, break the program with esc


POKE &41CD,&3E  
POKE &42AD,&3E

SAVE "PTE.BIN", B,&4000,&550

this will then print "TheNet's" connect message instead of NETROM's message. Thanks to Saku OH1KH for this. Incidentally, Saku's program has proved very successful with the MFJ-1278 unit.

As you may be aware both from this column and elsewhere, there have been rumours of a dedicated Spectrum Packet Radio system for quite some time. Its existence has been known to me for some 4 months (at time of writing). Up 'till now, I've hesitated to report it in any detail since it may never have "hit the market" Well, now I'm sure that it will.

At the time of writing, my knowledge of the system is based solely on a lengthy correspondence although I will actually lay hands on a working version within a week or two and my intention is to produce a short review

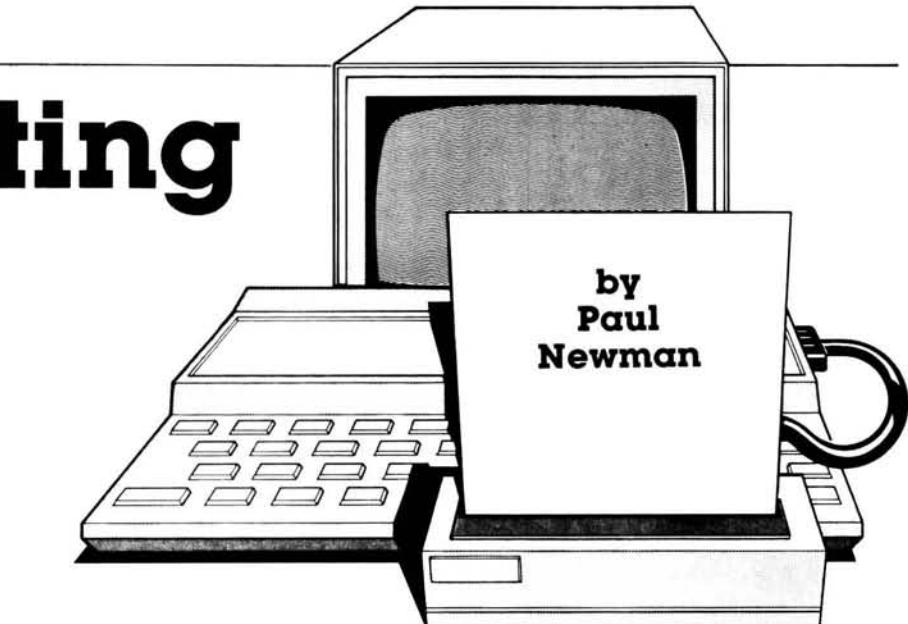

by  
**Paul  
Newman**

which will, I hope, also appear next time around.

The FB-AX25 Packet Radio System is believed to be the first TNC/Driver designed specifically for the Sinclair Spectrum 48K micro. It converts the micro into a complete Packet-Radio Terminal requiring NO extras other than a conventional v.h.f. or h.f. transceiver.

The software is supplied complete with a modem which is a compact unit plugging into the rear edge-connector of the Spectrum. No modifications to the Spectrum are required. A DIN connector permits connection to the p.t.t., mic and speaker lines of the transceiver. The software will be supplied on cassette. This is a "nothing else to buy" package—you don't need an additional terminal unit.

It is believed that this system will be ideal for anyone with a serious interest in Packet Radio. It is not a compromise but it will be economical enough to purchase a 48K Spectrum for the sole purpose of dedicating it to Packet Radio. (With 48K Spectrums selling second-hand at £10-£15 this has to be true!)

In RECEIVE-mode the screen is split into several windows, the top line showing the station callsign and a real-time clock. The second line shows the channel-number in use, present status and callsign of station called.

The third line is used to advise the channel numbers in use and flashes the channel-number of a message arriving on that channel. The balance of the top  $\frac{1}{2}$  of the screen displays incoming text.

The bottom  $\frac{1}{2}$  of the screen is used for either command lines to the program, or messages. Upper and lower screens scroll independently. The lower screen contains either the CMD: or TXT: prompts which is changed by alternate presses of CAPS and SYMBOL SHIFTS together.

Transmitted messages are displayed on the upper screen and prefixed with (S) so that there is no confusion with incoming text. CMD: must be selected

before entering any command. If an invalid command is typed it simply disappears from the screen before ENTER is pressed. (I believe I'm right in saying that currently there are no split-screen terminal programs for the 48K Spectrum.)

The screen can be scrolled forward or backward with a unique scrolling facility using CAPS-SHIFT  $\triangleleft$  (up arrow) or CAPS-SHIFT  $\triangleright$  (down arrow). Left arrow is used for backspace/editing and the right arrow to send » at the end of the final over to invite the station to reply. This is the usual convention in Packet Radio operating.

The ENTER key will also send the packet at any time, otherwise it will be sent automatically when the "PACK-LEN" (packet length) parameter is reached.

Program parameters can be changed by the use of about 85 commands but all are set up for normal use as default settings. The program is "user friendly" in that a parameter screen can be called showing the current settings such as Baud rate, Packet length, Connect alarm, etc., and can be changed simply by typing in the new parameter i.e.:

R baud rate 1200bps YES

For 300 bauds on h.f. this would read

R Baud rate 1200bps NO

Entering RO for NO or RI for YES immediately updates the screen. Packet length is changed by entering PO to P1, each one increases the packet length by 25 characters.

A Connect alarm sounds through the Spectrum speaker when a connect is made to the station and sounds for 5 seconds. It can be amplified by connecting an amplifier from the "ear" socket. The facility can be disabled. Word-wrapping is also provided.

Baud rates of 1200 or 300 are available and also a unique facility allowing either high (2025/2225Hz) tones or low (1070/1270Hz) tones to be selected

for h.f. operation. The standard v.h.f. settings are 1200/2200Hz, i.e. 1000Hz shift. All these are software-selectable and the modem switches automatically.

Buffers are available as follows:

Connect Message buffer can contain any message up to 90 characters. It is displayed on a separate screen and is sent whenever a connection is made to your station.

Beacon Message buffer can contain any message up to 90 characters and is also displayed on a different screen selected by command S2. This message is sent automatically every multiple of 5 minutes which may be selected by the commands B1 to B6. B0 disables the beacon message.

A type-ahead buffer allows the operator to enter a message on the lower screen which displays the last 180 characters before scrolling up. Edit facilities allow for correction of text before sending messages.

A separate buffer can be used to compose a message in advance of sending, for example, to a mailbox. Files can also be entered into this buffer either from the keyboard or cassette for later transmission.

The callsign buffer logs the last 20 stations received for viewing or sending to another station.

Both upper and lower case mode can be selected using the command L1 or L0. This changes the character-set for

both send and receive. It is quite refreshing to receive a normal 128 character set after operating on baudot RTTY.

Up to 9 separate Packet Radio stations can be operated at the same QTH using different SSIDs (secondary station identifiers) . . . i.e.-Z21FB-1 for the h.f. station and Z21FB-2 for the v.h.f. station. Up to 15 can be received or called.

The system also acts as a digipeater which is enabled by the command D1.

An echo allows outgoing messages to be displayed on the upper screen together with incoming messages thereby maintaining a complete record of the QSO. This can be disabled to conserve buffer-space if required.

Up to six channels may be selected to allow simultaneous connects with up to 6 stations at the same time. You therefore have a facility to carry on up to six QSOs at the same time with the relevant text being sent to the screen attached to that channel.

Sending text to a printer is at present limited to systems using the Rocky Gush DOS interface, although by the time the unit is released in UK I would expect normal RS-232 printers to be supported (G4INP). A facility also exists for sending a "busy" signal if you are not available for a connect but wish to monitor the channel. You are advised of the caller's presence.

The AX.25 protocol allows for up to 8 repeater stations to be used and this

facility is also supported.

A further program will be available at a later date which will integrate with this and permit full-colour pictures to be transmitted using the AX.25 protocol. It will operate between Spectrums only.

This "press-release" is based upon detailed specifications supplied by the system's designer Howard Benjamin. At the time of writing I understand that there is a possibility of one of UK's leading radio software authors becoming involved in the marketing of this system. This would, in my view, give the system the support it deserves.

There is considerable interest amongst members of the Sinclair User Group. Further information will be released as it becomes available and I'll happily supply on receipt of a stamped addressed envelope clearly marked PACKET INFO <sup>(ii)</sup>. I look forward to bringing you hands-on experience of this exciting development next time around. 73 till then.

<sup>(i)</sup> Mr S Lewis GM4PLM, 69 Irvine Drive, North Clippens, Linwood, Paisley, Renfrewshire. (s.a.e. please).

<sup>(ii)</sup> AMDAT, "Crofters", Harry Stoke Road, Stoke Gifford, Bristol.

<sup>(iii)</sup> Paul Newman G4INP, 3 Red House Lane, Leiston, Suffolk IP16 4JZ-no s.a.e. = no reply.

## Constructional

# Kitchen Konstruktion

*This month in No. 8 of his occasional series, Richard Q. Marris explains how to make and use a simple continuity tester.*

Optical acrobatics are usually involved when testing for circuit or winding continuity, usually with the multimeter set on the ohms range. This involves looking at where the test probes are while simultaneously squinting at the meter scale. It's obvious that trying to multiplex one's visual senses between two or three tasks is slightly over-stretching the human system. What is needed is a feedback system that uses one of the other human senses, the ears in this instance.

The simple continuity tester consists of a pair of headphones, a 1.5V battery and a couple of test prods. This idea, in one form or another, has been used around the author's QTH since schoolboy days. It must date back to some of the earliest communication experiments ever done; but has not been seen around much in recent years.

### Construction


The whole gadget can be built into any small enclosure, plastics or metal. Into the enclosure should be fitted a

single cell battery holder, R6 (AA) or R14 (C) size and a non-shorting headphone jack socket. A couple of suitable test prod sockets are mounted at the opposite end of the enclosure to the jack socket. If you have an old set of headphones and test prods the sockets could be dispensed with, and these items may be hard wired.

As can be seen in Fig. 1 the battery, headphones and test prods are wired in series with the circuit under test. If there is continuity then a click will be heard in the headphones. With your ears checking for continuity, your eyes can pay full attention to where the test prods are going.

The device has been found useful for checking continuity in transformers and other windings; checking wiring looms for breaks and also tracing circuits on strange chassis. It is, of course, essential that all components and circuits being checked should be isolated from any source of power. This would also apply when using an ohmmeter for the same purpose.

**PW**

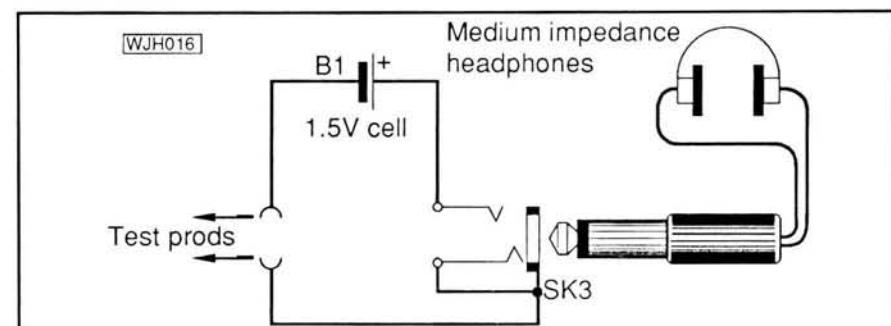

**£375**

 STANDARD.

## C500

WE ARE PROUD TO ANNOUNCE THE NEW, TOP OF THE RANGE, STANDARD C500 HANDHELD 2m AND 70cms, FULL DUPLEX - DUAL BAND TRANSCEIVER AT THE UK RECOMMENDED RETAIL PRICE OF £375.00 (INC. VAT)

THIS IS, OF COURSE, THE EUROPEAN VERSION WITH FACTORY FITTED TONE-BURST - PLUS MANY OTHER INCREDIBLE FEATURES NOT PREVIOUSLY AVAILABLE IN A HANDHELD.

- ★ Frequency coverage 144-146 & 430-440MHz with Full Duplex available
- ★ Extended receive capability:- 130-169.995 & 410-470MHz
- ★ 2.5 to 5 Watts output (depending on battery pack)
- ★ High or Low switchable RF output
- ★ Step sizes:- 5/10/12.5/25/50kHz (user programmeable)
- ★ Keyboard programmeable repeater offset (0-39.9MHz)
- ★ Reverse repeater mode
- ★ Priority Channels available on both bands
- ★ Each band has 10 memories for frequency and repeater offset
- ★ Dual synthesised VFO's

- ★ User programmeable CALL button (instant QSY to your favourite channel - either band)
- ★ Numerous scanning modes (Pause or Busy - memories - band etc.)
- ★ Auto Power Off - with Alarm (4mA current drain on standby)
- ★ Battery Save on receive - 9 user programmeable Rx/Off ratios
- ★ Vacant Channel Search - for easier QSYing
- ★ Lock - disables keypad and/or PTT
- ★ Squelch Off button (saves twiddling the knob)
- ★ Low Battery indicator
- ★ Easy to read Liquid Crystal Display with backlight
- ★ LCD S/Power output meter
- ★ Can be powered directly from a car's cigar lighter (5W output)
- ★ Keypad or Rotary Knob frequency selection
- ★ Dimensions:- 173mm H x 60mm W x 34mm D

\* \* \* \* \*

AS THE SOLE IMPORTER OF STANDARD EQUIPMENT IN THE UK, WE ARE ABLE TO OFFER A FULL BACKUP SERVICE AND CURRENT SPARES FROM STOCK.



**£599**

 STANDARD.

## C5200



- ★ Frequency coverage 144-146MHz and 430-440MHz
  - ★ Extended receive coverage available
  - ★ Full Duplex available
  - ★ Can be used as a mobile repeater (with optional unit)
  - ★ RF Output 45W on each band
  - ★ Step sizes:- 5/10/12.5/25/100kHz or 1MHz on each band
  - ★ Totally separate bright green L.E.D. Displays for 2m and 70cms
  - ★ Simultaneous audio from the internal speaker
  - ★ Separate external speaker outputs for each band
  - ★ Separate volume and squelch controls for each band
  - ★ 5 different scan modes available.
  - ★ 10 memories per band
  - ★ Repeater shift can be stored in memory
  - ★ Reverse repeater available
  - ★ CALL button for instant QSYing.
- THIS RADIO REALLY IS DIFFERENT TO THE RUN OF THE MILL DUAL BANDERS THAT YOU MAY HAVE SEEN BEFORE, SO COME IN TO THE SHOP AND TRY IT FOR YOURSELF.

400 EDGWARE ROAD,  
LONDON W2  
01-723 5521 Telx 298765



Normally 24hr despatch  
but please allow 7 days  
for delivery.

NEAREST TUBE:  
EDGWARE ROAD  
PADDINGTON

OPENING TIMES:  
9.30am-5.30pm Mon-Fri.  
10am-4.30pm Sat.

FOR AMATEURS

**R. N. Electronics**  
6 & 4m TRANSVERTERS  
**NEW**

**Additions to our range**

ALL PRICES INCLUDE V.A.T.

- 144/50MHz TRANSVERTER  
25w p.e.p. £179 + £4 p&p
- 28/50MHz TRANSVERTER  
25w p.e.p. £199 + £4 p&p
- 144/70MHz TRANSVERTER  
25w p.e.p. £239 + £4 p&p
- 144/70MHz TRANSVERTER  
10w p.e.p. £199 + £4 p&p
- 28/70MHz TRANSVERTER  
10w p.e.p. £199 + £4 p&p
- 7dB ATTENUATOR  
£22 + £2 p&p
- SWITCHED 10m RECEIVE  
CONVERTER 2m I.F.  
Ideal for crossband  
£45 + £2 p&p
- RECEIVER CONVERTERS  
2m, 4m, 6m, 10m  
with 2m or 10m I.F.  
£39 + £2 p&p

MADE IN ENGLAND  
2 YEAR GUARANTEE

MARKET LEADERS IN 6 METRE TRANSVERTERS

**NAVICO®**DESIGNED FOR TODAYS AMATEUR.  
VARIABLE MOUNTING POSITION FOR  
THE MODERN CAR. EASY TO USE YET  
PROVIDING EVERY FEATURE NEEDED  
FOR THE EXPERT OR BEGINNER.**AVAILABLE FIRST AT LEICESTER RALLY  
28th & 29th October**FROM  
**R. N. Electronics**FOR DETAILS:  
0277 21440637 LONG RIDINGS AVE  
HUTTON, BRENTWOOD  
ESSEX CM13 1EE

# C.M. HOWES COMMUNICATIONS

## EASY TO BUILD KITS


**SWB30 – SWR/POWER INDICATOR/LOAD**

The HOWES SWB30 kit enables you to build an essential piece of station test equipment easily and at reasonable cost. The SWB30 not only indicates SWR and RF power, but also features a power attenuator that reduces the level of radiated tuning signal and provides an excellent match to your transmitter at all times whilst the antenna or ATU is being adjusted. A resistive bridge circuit is used to give accurate, repeatable results over a wide frequency range.

- ★ Nominally flat response in SWR and power modes from 1 to 200MHz.
- ★ Smart, custom made moving coil meter unit.
- ★ Power handling suits radios of 1 to 100W RF output, provided a tuning signal of less than 30W is used.
- ★ Unit can double as a 50 Ohm "dummy load" at 15W continuous.
- ★ Ideal companion for the HOWES CTU30 all HF bands ATU kit.

SWB30 kit: £12.50

Assembled PCB module: £17.30

**ASL5 – DUAL BANDWIDTH RECEIVE FILTER**

On todays crowded bands, high quality filtering makes all the difference. You can upgrade the performance of almost any radio by the addition of the ASL5 filter kit. It simply connects in line with the external 'speaker or 'phones output of the set, giving a CW bandwidth of 300Hz (-6dB) and sharp roll-off for speech modes typically 50dB down at 3.3kHz – a big improvement to the performance offered by a normal crystal I.F. filter as fitted to most receivers and transceivers. This kit offers a very cost effective and worthwhile improvement. Suits all the popular rigs, Yaesu, ICOM, Kenwood etc. 12 to 14V DC operation.

ASL5 kit: £14.90

Assembled PCB module £22.50

**Eydon, Daventry,  
Northants NN11 6PT  
(mail order only)  
Phone: 0327 60178**

**DcRx DIRECT CONVERSION COMMUNICATIONS RECEIVERS**

The HOWES DcRx receivers have become the popular choice of both the beginner looking for a low cost start into the hobby, and the experienced operator building a low power (QRP) station. These little sets offer amazing performance for simple equipment. Versions are available for each of the following bands:- 160, 80, 40, and 20/30 Meters. They can also be combined with some of our other kits to form transceivers. Tuning capacitors to suit all but the 160M version are available at £1.50 each, you need two per receiver. Modes: SSB and CW.

DcRx kit: £15.60

Assembled PCB module: £21.50

**Other HOWES KITS include:**

	KIT	Assembled PCB
CTX40	and CTX80 QRP Transmitters for 40 and 80M	£13.80 £19.90
MTX20	10W 20M CW Transmitter	£22.90 £29.90
CVF20,	CVF40, CVF80 VFOs to suit above TXs	£10.40 £16.90
CSL4	CW/SSB Filter for DcRx	£9.90 £15.90
DCS2	Signal Indicator Meter/Driver for DcRx	£6.60 £10.60
CV220	and CV620 2 and 6M to 20M RX converters	£17.50 £23.90
XMI	Crystal Controlled Frequency Marker	£16.80 £21.90
ST2	Side-tone/Practice Oscillator	£8.80 £13.50
AP3	Automatic Speech Processor	£15.90 £22.80
CM2	Quality mic with VOGAD	£11.90 £15.90
CTU30	All HF bands ATU for RX or 30W TX	£27.90 £33.90
TRF3	Shortwave Broadcast TRF receiver	£14.80 £20.20
HC220	and HC280 20 and 80M Transverters from 2M	£52.50 £83.50

All kits include PCB and all board mounted components, plus full clear instructions. Help, advice and sales are only a 'phone call away, but please send an SAE for a copy of our free catalogue.

UK P&amp;P is £1.00 per order. Delivery normally within 7 days.

73 from Dave G4KQH, Technical Manager

# On The Air

## On The HF Bands

Reports to Paul Essery G3KFE  
287 Heoly-Coleg, Vaynor, Newtown, Powys SY16 1AR

Just how much of the mail has reached me, due to the postal dispute, heaven only knows. So, if you wrote and no mention appears, bear with me—your letter won't have landed.

### The Bands

My own impression is that 21MHz (15m) has yielded more entertainment than 14MHz (20m), if only because the noise level drops noticeably as one goes up to 21MHz. I'm quite sure that there are interesting DX signals, maybe even pile-ups, lurking beneath the barrage of noise which seems never to drop below S8 in the afternoon or evening hours. Certainly, the contrast between today and conditions at the bottom of the cycle a couple of years ago are spectacular; 21MHz open almost every evening at least until around 2100Z. I have even managed to eavesdrop on the odd 28MHz (10m) opening, which is quite unusual.

### Use or Lose!

It is purely lack of use that has resulted in the Yanks losing the lower 2MHz of their 220MHz band, as reported recently in *The DX Bulletin*. A lesson which could come home to roost on our lower bands come the next WARC, which is probably as near as 1992. Make no mistake, the pressure is on; if we have under-used bands, we will see them snatched by the broadcasters and the other spectrum users. To me, it seems likely that our new bands, allocated at WARC 1979, plus the 1.8MHz (160m) band, are the most at risk. Let us see more real activity on these bands, and more reporting of that activity.

### What Gives?

At the time of writing I am still hearing rumours about the Lynx DX Group operation as 4WOEA; but there is no hard information as to dates or whatever.

Again at the time of writing, there is activity from VP8 Falkland, VP8 S. Georgia and VP8 S. Orkney; at one stage all three were loading 21MHz which must have caused some people to agonise over which one to tackle first!

If you come across a 4F1 station (they are increasingly common), this is the top grade of licence in the Philippines.

There has been a report of an S6HF/MM on 21MHz, asking for QSLs to a Glasgow address. One fears this is yet another of the phoney /MM stations; it seems to be a fashion among sailing types to run amateur equipment aboard, but the information gleaned about them indicates that a very large proportion of such "amateurs" are in fact phoneys.

The Vanuatu YJ8 expedition seems to have come to naught; but a buzz is going round that it is postponed until either December, or maybe August next year. Also in the cancellations, the 9Q5HT expedition—no reason given.

Turning to Fiji, lots of 3D2s about; but, alas, AL7JG/3D2 who has been quite active from the area is operational from his boat, so won't count for anything at all.

C9MKT seems to operate like an actor using the Method . . . everything done to a

list! Just why this one is considered to justify a list operation, no-one seems to know. However, TDXB states that his licence only permits operation on 2–3 days each month over the next year; furthermore his activity, I understand, is being carefully monitored by the licensing authorities, so watch what you say!

BY9GA is quite active, being heard in the mornings and around tea-time in UK, and it should be noted that this BY is in the rare CQ Zone 23.

FP, St Pierre et Miquelon, has always been a rare bit of N. America, but it is understood that F2DX (Ex-F6EYS) is there for three years and promising activity on all bands 1.8–28MHz.

### Silent Keys

Quite well known in UK was Sybil Stevens ZD7SS, widow of the late ZD7SD; she is reported to have passed away on August 9 and will be much missed by many UK amateurs.

LX1BW must be one of the most well-known calls on the European continent; alas Willy also is a silent key, on July 11 at the early age of 53.

### The 1.8MHz Band

No doubt at all, the main item of news is the receipt of that rather useful newsletter covering doings on this band, offered by VE3INQ. Perhaps the most interesting piece was the offering by ZYOSA and ZYOSB, covering their exercise from St Peter and St Paul Rocks. One end of the antenna was on South Eastern Rocks, the station on South Western Rocks; they were taking about 3½ hours to get from one end of the antenna to the other thanks to the sea in between. A dipole, with its centre feedpoint wasn't possible and the antenna came down more times than enough, carried away by winds and bird strikes; it even carried away the a.t.u. on one occasion. Even the drum of fuel for the generator was under water for some of the time, which made for some stoppages while the drum was hoisted up enough for a refuelling exercise.

Another interesting little snippet was a reprint of W1BB's article of 1965 covering the apparent 169-year cycle in the sunspot routine. 3B8CF writes on his experience on the band over last winter and how he tackled the question of an antenna for the band on his small property in Mauritius.

Perhaps the most important piece of information, listen to the 4X4NJ Top Band Net, on Saturdays 1400UTC on 14.339MHz ± QRM, for the very latest news on Top Band activities.

Details of the VE3INQ Top Band Annual News Digest can be obtained from Ivan Payne VE3INQ, Box 146, Station E, Toronto, Ontario, Canada M6H 4E1. Enclose an s.a.e. for Ivan's reply. In general, Ivan keeps a stock of your s.a.e.s for each issue, and if you can't lay hands on Canadian stamps, then the way is to send an addressed (4½ x 9½ inches minimum, A4 preferable) envelope and 5 IRCs for the next issue to be airmailed to you. With some 28 pages well filled, a hefty envelope goes without saying!

The only other report on Top Band this time is the one from G2HKU (Sheppeney) who mentions s.s.b. contacts with ON4CW and ON7BW, while c.w. made it across to ON4CW.

### The 3.5MHz Band

Nice to hear again from G0HGA (Stevenage) who offers all c.w.; AC2E, HB0/DL1GGT, DL, PA, ON, LA, SM, OK, SP, GM and northerly G stations.

Another report on this band was from G2HKU, who notes his contact with G3RJV/A using his Argonaut. This was the Rev. George Dobbs, fund-raising for the Organ Fund at St. Aidan's Church, Rochdale. In addition, 15 watts of c.w. to the first British-built Century-22 made it to G3NOZ and UA6EED in the course of some tests from home.

G3BDQ (Guestling) had his first sally on the band this season one evening and raised CX1TE, VK6LK and 5B4MF.

### The 7MHz Band

Again G3RJV/A by G2HKU, on c.w., although conditions seem to have been a bit "down" this month; PY7IW, VK3MR, TV6DEB and OY/SM0FSK were also lifted while trying the new Corsair.

G0JBA (Sittingbourne) works shifts and heard a fair amount of DX around 0430Z before heading off to work; but on the other hand those worked were all of the inter-G or Western EU persuasion.

G0HGA as usual worked many G, DL, YU, PA, F, ON, LA, SM, UA, SP, I, EA and OZ stations, plus OG2C for a Finnish Radio Camp, UL8LYA, UZ9FYR, SO5ASL (G4ASL using his reciprocal SP licence; OSL to G4ASL), 4NOCW for a YU special, UA9SA, plus gotaways by way of FG8BP/FS, HB0/F6GM and TK5VN, the latter under much QRM.

G4XDJ used his delta loop to raise SM5IZ, OZ1GHQ, GM3GKJ, GM3JDR and LA9LE on c.w., plus SM6LJU on s.s.b.

### WARC Bands

As usual, a dearth of reports. G4HZ (Altrincham) notes the DKOWCY beacon as being on 10.143MHz, first noted on August 14 at 1452Z. It sends "DKOWCY Beacon" then a long dash and repeats.

G2HKU kept, rightly, to c.w. and on 10MHz he raised ZL4HB, OH6KO, W1CFZ, LX1DA and VK3NC. There are just one QSO on 18MHz with F6FQF.

### The 14MHz Band

It is often said this is the DX world's lifeline; certainly it contains most of the world's oddest electronic and natural (QRN) noises in abundance.

Most times that I cast an ear around the band, the noise was enough to put me off, but I did actually have just one QSO, with VO7AA. This was a Marconi celebration and was for me doubly interesting in that I have seen a postcard of this exact spot, as it was at the time Marconi used it, with the Marconi antenna drawn in, and signed by Capt. Round of the team . . . I wonder whether it looks like that now!

Now **G0AMO** (Andover) makes his bow; he has a Howes Transverter driven by an FT-290R; ten watts into a G5RV at 9m. During the first week on the air, the s.s.b. out of this combination raised ZL4OD, AX3ABD, CP5GC, VE3BZ, VE1CHP, KA1UGC, AB2E, W4EXT, VK5AKW, W1OBE, KD2NN, KE2CG and WB2DIN, plus lots of Europeans. Welcome aboard, Mike.

It was c.w. all the way at G2HKU, who worked W5XJ, KI6HP, VE7IQ, KB7WD, W200RR, TA3D, TR8JL, VK2QL, WB6UAG, VK5DS, UZ9SWI, PY7AHA, K2OZ, KH6IJ, K6DWO and 4NOCW.

On to G4XDJ, who offers RTTY to GODHU, RA9YB and OH2NAF, plus c.w. to VK6ZE, JA9TSI, W2VAV, VE3GME, VK3ANJ and a two-way QRP one with VK7VV at three watts each way.

G3BDQ didn't spend a lot of time on the band, but he did talk to VK6CW, POPJ and ZL2APW.

## The 21MHz Band

An interesting band, and at present probably the most useful, G2HKU stuck to his key, and exchanged news and views with ZP5LOY, W5/DL3YBM, K5NA, LU1MQUE, YB4FN, UA0KF, W4MJ, W2LZX, N4LS, W5PLH and W6DU. In fact, Ted felt that conditions might have dropped off somewhat during the month.

I spent the odd few minutes scratching around, between the chores, to raise, on s.s.b. TZOMAR, followed immediately by GM4YBJ in Orkney, VP9LR, UI8LAD, CX6BZ, UZ9LWE and OH2RM; gotaways included VK4ANP who was testing-out a renewed antenna installation comprising a 21m tower and a log-periodic array, but was so tired he after getting it all up that he all but fell asleep at the rig! VP8BTA was doing a lot of good business, but the stalk for him was alas interrupted by the shrilling of the landline.

Three different modes were used by G4XDJ; s.s.b. gave 9V1WP, CU3GO and KA8SYW, while RTTY made it to 6W6JX, HZ1AB, LU8DHT and WE2K, leaving c.w. to deal with YD4FQB, JR2RVL, KT3X, W1EQQA, AB4ID, PY2ZEB, PU2LWB, N4FYI, N3GIB, KB6NRL, W3LWN, LU5DO, N4PHH, FY5YE, VE2MDJ, KB8MN, VE3AR and JA8HNL.

Now to G0HGA who stuck to c.w. and 5 watts QRP; Angie offers WR7C, NJ1T and UV9CAI.

Turning to G3BDQ, we find on c.w. John raised HL1IFF, and 8Q7MT, while s.s.b. accounted for BY5QA, HK0HEU, VP8VK, YE7W, CN8FC, HZ1AB, UJ8JMM, UL8GWB, AX4NSB, DU1CRU, 9J2EZ,

## VHF Up

Significant events to be covered this month are a 50MHz opening to South Africa, reports on recent DXpeditions to St Kilda and to the Isles of Scilly and a very good Perseids meteor shower.

## Awards News

Two readers have gained stickers for their 144MHz QTH Squares Century Club certificates. From Italy, **Alex Della Casa I4YNO** was awarded one for 250 squares confirmed on September 1 for award number 60. Three QSOs were on tropo, nine via Sporadic-E, twelve by m.s. and one, with YO9AZD (ME) on 26 July 1987, by f.a.i. mode. His m.s. confirmations included EI4VVG (UM) in June 1987 and

9V1WW plus a gaggle of West Coast Ws.

On s.s.b. G0JBA has a wire dipole put up in the previous month and 50 watts which made s.s.b. contact with A92BE, EA1ETS, IK1LRY, K2DA, KF5TT, UA3AFJ, W5VX, W5ZPA, plus a QSO on the key with 4X6PO.

## The 28MHz Band

Naturally enough, with the rising sunspot activity, there has been quite a lot doing and certainly there have been paths to the DX.

G4XDJ split his time between s.s.b. and c.w.; s.s.b. coped with VK6NQE, YC3FNL, GOGKO and G4IJM/A, while the c.w. was used for OH3KN, OH2BZN, LB1VD and OH8OB.

G0HGA stuck to QRP c.w.; the five watts made it out to LU3YE, EA8FO, EA1BSU, DJ2WC, YO2BON, DF3CB, DL1SN, OK1CZ (QRP both ways), DL9MDW, OZ5S, SM7RME, LB8SC, EA6EJ, HA3NI, OK3ZWX and OK2KR.

A welcome first report from **G0JFM** (Brixham). Steve doesn't get a lot of time for radio in the holiday season, but he did find time to raise TR8SA and 4NOCW on 28MHz s.s.b., plus LA0EM on f.m. That 4NOCW was a Yugoslav expedition, G0JFM believes. On a different tack, the locals have given him a phonetic rendering of "January February March"—a pity that after January 1 he won't be able to add "/April"!

Now on to G3BDQ, who used s.s.b. to raise UZ9CWW, ZS2SI, ZS4AE and turned to f.m. for a host of semi-DX stations. John has been having a change-round in the shack and has a TS-680S which is fine and easy to operate on s.s.b. and f.m., but doesn't, in his eyes, compare with the Corsair on c.w.

Now a DX report; this one comes from **ZS5DD** (Pinetown) who is ex-G3AOY. Bunny found the 28MHz band starting to open for DX contacts back in February, so he put up a half-wave sloper with the feedpoint up at 7m; the QTH is some 370m above sea level. The rigs used are a Drake TR4 and remote v.f.o., Trio TS-510 and on occasion the old FT-200 gets a warm-up too. By now, ZS5DD will have got his 28MHz beam back up. All c.w. contacts in the last couple of months, included were SV4AAQ, 5H1HK, KH6HI,

KH6DQ, EA2SE, G4KLF/MM in the Gulf of Oman, VS6DT, JF3LOP, JR1AFA, FT5ZB, TA2AN, T5GG and RI8BT. However, Bunny would love to have a lot more G contacts; to that end he is on 28.015–28.020MHz, every day, at 0515 and 1400Z for about 20–30 minutes, calling CQ G de ZS5DD on the usual 3 × 3 routine. All contacts will be QSL'd, the Bureau ones via the Bureau, direct ones direct. But it is requested stations QSL-ing direct do write his name—D.C. Hilton—on the envelope, as this does speed up delivery.

G0JBA next; Phil says the contacts were mainly Europeans, with Africa heard from mid-morning and S. America from mid-afternoon, the opening to N. America having been in the evenings. Contacts using s.s.b. were booked in with CT1BHK, DH2RAM, EA4CZF, EA5/DHOHAJ, GMOJAV (Orkney), HA6VK, IK8GGQ, ISOJHJ, LA8DF, LU1BDF/P/4X, OH6NTO, PY2YP, lots of SMs, TA3F, T77F, SP2AQP, UB5, UC2, UH8, UP1, UZ6, YU7IGH, 4X4FR, 9J2AL (QSL via Box 20127, Lusaka), while the c.w. mode appealed more to OH1OU and G3AFV; locals were worked in both c.w. and s.s.b. modes; f.m. accounted for G0CEG, through a German repeater!

## Contests

All the information on contests on the h.f. bands is put together by W1WY, for his Contest Calendar column in *CQ Magazine*; here I only mention the main ones. Anyone who is thinking of a contest should pass the word to W1WY, because all the avid contestants in all modes, work by Frank's column. He needs to know at least three months ahead and preferably much more... e.g. November 15 for the February issue, and so on.

October 15–16 covers JOTA, and the RSGB 21MHz CW contest. October 29–30 is the CQ WW DX SSB contest, November 11–13 the JA International DX Contest, the same weekend as the European RTTY contest, and the VK YL Contest by ALARA. November 26–27 is the CQ WW DX CW Contest. December 2–4 is the ARRL Top Band Contest, and December 10–11 the ARRL Ten-metre Contest, which is the same weekend as is down for the ARCI QRP CW shindig.

# The next three deadlines are: Oct 26, Nov 24 and Dec 22

Reports to Norman Fitch G3FPK  
40 Eskdale Gardens, Purley, Surrey CR2 1EZ

EI4VCH/P (UO) and EI2VPX (VN) in August 1987, all on c.w.

**Paul Pasquet G4RRA (SRY)** has been sending out many QSLs direct and this has paid off. His 225 sticker was issued on August 10 for award number 86. The 18 new confirmations comprised 15 s.s.b. and three c.w. QSOs. Seven were on tropo, nine via Es and one each via Aurora and m.s. modes. The choicest cards were from SV2JL (LA) and SV4LD (LZ) both Es QSOs on 5 June 1985 and FC1DDA/P (DE) on tropo on 12 August 1987. Paul's total squares confirmed is 226.

## Beacon Notes

First the 50MHz scene starting with the news that GB3NGI is now QRV on

50.0625MHz f.s.k. from locator IO65NC, the site of the GB3LY v.h.f. repeater in Limavady (LDR). It runs 25W to a halo antenna 280m a.s.l. GI8YDZ is its keeper and reception reports should be sent to him at QTHR.

**Geoffrey Holland G3GHS** is the Honorary Secretary of the Mid Cornwall Beacon and Repeater Group. He wrote that in June permission was received for beacons on 50.0425MHz and 1296.860MHz. The long-awaited new Gas Board mast at the Hensbarrow Down site (IO7OOJ) was being erected. The 70, 144 and 432MHz beacons will be off the air while their antennas are being transferred. New brackets and shackles for all five were being made when Geoffrey wrote.

Practical Wireless, November 1988

The group has applied for a change of callsign to the more appropriate GB3MBCB but until this is sanctioned all five will still sign GB3CTC, the call of the original beacon at Camborne. The group is very grateful for the donations received so far but more cash is needed to complete the project. G3GHS is QTHR.

Overseas news now and Mike Devereux G3SED (HPH) reports that HC8SIX on 50.082MHz and LU1MA on 50.087MHz are both in operation. No other details of these Galapagos and Argentine beacons yet received.

## Contest Notes

The first session of the 1.3/2.3GHz Cumulative Contest is on October 14 from 1930–2200UTC. The last four are scheduled for October 30, November 15 and December 1 and 17, all those from 2030–2300UTC. There are two sections, F for single-op fixed stations and O for all others.

The second session of the 432MHz Cumulatives is on October 22, 1930–2200UTC, the following one on November 7, 2030–2300UTC. There are F and O sections again.

50MHz addicts have the Trophy Contest on October 23, 1000 to 1700UTC, a two section affair; F for single-op fixed and O for all other stations. Radial ring scoring up to 650km but all longer DX counts 25 points. There are county/country multipliers.

For c.w. addicts the weekend November 5/6 is a "must." The Marconi Memorial Contest is from 1400UTC and lasts 24 hours. For those who cannot devote the time to that there is the RSGB CW Contest buried in it on the 6th, 0800–1400UTC. Each has two sections; S for single-op and M for multi-op stations.

**Annual v.h.f./u.h.f. table  
January to December 1988**

Station	50MHz Countries Countries	70MHz Countries Countries	144MHz Countries Countries	430MHz Countries Countries	1296MHz Countries Countries	Total Points
G1KDF	38 16	— —	83 18	57 11	25 6	254
G6HKM	30 13	— —	76 27	47 15	25 10	243
G1SWH	43 18	— —	95 18	53 7	— —	234
G4XEN	43 14	9 1	66 32	48 9	— —	222
G8LHT	8 7	6 1	65 28	40 13	6 2	176
GOIMG	37 14	28 4	43 11	23 3	— —	163
G4DEZ	33 16	— —	30 16	27 6	34 10	162
GW6VZW	42 16	— —	68 16	— —	— —	142
G1IMM	26 8	— —	52 11	31 2	— —	130
GM0EWX	53 12	— —	49 13	— —	— —	127
G6MML	17 8	11 4	41 14	17 5	5 3	125
ON1CAK	— —	— —	70 31	9 6	— —	116
G1EZF	— —	18 2	67 23	— —	— —	110
G4VOZ	18 11	46 6	— —	21 7	— —	109
G4YCD	— —	— —	83 23	— —	— —	106
ON1CDQ	— —	— —	61 32	6 6	— —	105
GOEHV	— —	35 5	45 19	— —	— —	104
G4ZEC	— —	— —	75 27	— —	— —	102
GW4FRX	— —	— —	70 28	— —	— —	98
GJ6TMM	23 12	— —	36 14	7 5	— —	97
G3FPK	— —	— —	77 20	— —	— —	97
GM0HBK	26 8	— —	46 15	— —	— —	95
G6MGL	19 10	— —	49 10	— —	4 2	94
GW4HBK	22 18	43 6	— —	1 1	— —	91
G140WA	19 14	— —	40 14	— —	— —	87
G7ANV	— —	— —	66 21	— —	— —	87
G8XTJ	16 4	— —	55 11	— —	— —	86
G4ARI	— —	16 2	58 9	— —	— —	85
G8PYP	13 9	2 1	38 12	6 2	— —	83
G1SMC	21 17	— —	25 18	— —	— —	81
G1DOX	16 2	19 2	22 5	5 2	2 1	76
G4AGQ	— —	13 1	35 8	12 3	— —	72
G1CEI	— —	— —	59 12	— —	— —	71
G2DHV	5 1	12 1	28 6	7 1	— —	61
G3EKP	12 3	16 4	7 4	5 1	— —	52
G4WHZ	3 2	— —	31 12	— —	— —	48
GM0JOL	— —	— —	30 10	— —	— —	40
G4ZVS	— —	— —	34 5	— —	— —	39
G0HGA	— —	— —	30 5	— —	— —	35
G0HDZ	— —	— —	30 5	— —	— —	35
GU4HUY	— —	— —	23 10	— —	— —	33
GM1ZVJ	4 3	— —	14 7	— —	— —	28
GPBNM	— —	20 3	— —	— —	— —	23

## Dxpedition News

First the Five Bells Contest Group's trip to St Kilda which was reached after a 28 hours journey in a chartered fishing vessel. The team comprised Keith Tatnall G4ODA, the Group's chairman, David Johnson G4DHF, John Arnold G4NPH and Chris Phillipson G8IJC.

Eight other civilians were on the boat which had to anchor off shore. On a purely voluntary basis, some Army personnel in inflatable boats met the party. The "civvies" helped the Group load all their equipment into the inflatables for ferrying ashore.

The station was established at a quarry site about 120m a.s.l. They were able to use a 5 x 2.5 x 2.5m metal container as a shack, thanks to some contractor's staff who cleared it out for them.

The equipment included six 19kg gas containers for the generators. A 3kVA one powered the amplifiers and a 1kVA one the rest of the gear. There were some rusty poles on site which were of use for the antenna supports. The radio stations comprised an Icom IC-730 and home built transverter for 432MHz, the antennas being four 18-ele Yagis to a WOEYE design modified by G4CYA.

For 144MHz they had an IC-202 with BF981 front end, SRA-1H ring mixer and digital readout, and a Yaesu FT-225RD with MuTek mods. The antenna array was four 9-ele Yagis from Tonna. Home-built amplifiers with 3CX800 valves were used on both bands.

There were 50MHz and h.f. bands stations too. On 50MHz the antenna was a 4-ele Yagi, with dipoles for the h.f. bands.

Nearly 500 QSOs with about 380 different stations were completed on 144MHz including 55–60 on m.s. Conditions were rather strange on this band with all long

distance signals sounding garbled and distorted. This explains why the operators of GB4VR may have sounded a little abrupt and impatient at times by requesting rapid repeats of reports.

Only 20 QSOs were made on 432MHz due to severe TVI problems. This was inevitable as the local low power TV relay on the island was operating close to the band. On 50MHz some Es contacts were made.

The operators were G4DHF, G4NPH and G4ODA. G8IJC looked after the "creature comforts" aspect. They stayed under canvas at a designated camp site 25 minutes walk from the quarry.

The St Kilda islands are administered by the National Trust of Scotland. The Nature Warden and the local Army Commander were very interested in the Group's activities. The contractor's staff and other visitors gave welcome assistance, too.

G3FPK was one of the many lucky stations to have worked this rare square and, on behalf of all readers, a big "Thank you chaps" for an excellent Dxpedition.

Next the Derbyshire Hills Contest Group's trip to the Isles of Scilly (WJ09e) from August 4 to 14 as reported by Nigel Wilson G4VVZ, the Group's Secretary.

They had equipment for the 50, 70, 144 and 432MHz bands. On the afternoon of the 5th, tropo conditions on 144MHz to D, F, ON and PA were good but the best DX were OZ1s FGP, KLU and OF in EQ square, about 1250km.

At other times QSOs were made on tropo with EA2BWA/M, F3TE and F1CCM (ZD), GM8COX/P (YP), F6BSG (CG), I2FAK (EF) and DJ9CZ (DL). Tropo to the south was excellent on their last night and 15 EAs were worked in the "D" row of squares. The most enjoyable QSO was with EB4EO/P1 on f.m. who gave an S9+60dB report from their 40W to a collinear antenna.

The main activity was on 144MHz with about 750 QSOs made including 119 completed on m.s. Best m.s. DX were OH2TI (MU) at 2260km and UP1BWR (MO) at 2192km. 115 squares in 27 countries were worked, using the call G4ZAP/P.

On 432MHz G6APZ/P worked about 50 stations the best DX being EA1BLA (VD) on 25W after two amplifiers had failed along with a GaAsf.e.t. pre-amp. DL9KR was heard off the moon but 25W was quite insufficient to attempt a QSO.

Equipment problems also curtailed 70MHz operation but G4VVZ/P did work G4SEU (ZM), G3APY (ZN), G4APA (YN) and G3EDD and G4NBS (AM).

No such problems on 50MHz though for G4VVZ/P with Es contacts to LA6QBA/P on several occasions plus LAs 1YCA, 1ZE, 8WF and 9T. OH was heard via Es. The m.s. attempt with OH1ZAA was, "... a touch and go affair ..." on 50.200MHz but PAORDY was easy to work with a 30 seconds S8–9 burst.

The other operators were Martin Daft G6ABU and Richard Mason G6HKS. Nigel acknowledges the prior assistance of David Hardy G8ROU and Colin Oakley GOAEA. Over the first four days Mike Coombs G4YBB gave them a lot of help, too.

## OSCAR-13

Following the criticism of the use by some West European satellite operators of Mode JL on OSCAR-13, a letter has been issued jointly by AMSAT-UK and AMSAT-DL to magazines, groups and individuals. This requests that the

144.425 to 144.475MHz uplink sub-band only be used by Eastern Bloc countries who cannot use the Mode L 1269MHz band. See "Newsdesk" this month.

## The 50MHz Band

A foretaste of things to come later in Solar Cycle 22 occurred on August 28 when South African stations worked into the British Isles. G3SED is claiming the first G/ZS QSO of this cycle. Mike's CQ call at 1640UTC on 50.110MHz was answered by ZS6XJ (KG33); Leroy was S3-7. At 1642, Hal Lund ZS6WB (KG44) was contacted at S3-9. ZS6LN (KG46) was the third ZS worked at 1734; Jack was S2-4.

Earlier at 1555, ZS6XJ had worked DL9RM cross-band 50/28MHz and at 1600 he heard part of G4IGO's callsign. At 1603 G4UPS heard the ZS6PW beacon, now on 50.009MHz, and the ZS6XJ keyer.

Between 1643 and 1741 Hal and Leroy worked G3JVL, G8HVV, G4JCC, G8VR, GJ4ICD, PAORDY, F1DQK and F6DOK. EI2FH was heard. Between 1725 and 1740 ZS6LN contacted GJ4ICD, G3SED and G3JVL.

My Minimuf computer program suggests that for a solar flux of about 140, F2-layer propagation would have been possible at the southern end but at the higher northern latitudes the h.p.f. would only have been about 40MHz. Does anyone have any suggestions as to the likely propagation mode?

G3SED sent the following information. ZBOE is now on from Gibraltar with 15W to a dipole but soon to be using a 5-ele Yagi. FT5ZB on Amsterdam Island in the Indian Ocean is beaming towards the UK and monitors 28.885MHz all day. FH5EF in Mayotte is also active and looking to the UK, while FH5EG is building a transverter.

From Cyprus 5B4AZ has obtained a 50MHz licence and is keen to make his first G QSO. 9Q5NW in Zaire is being sent a 50MHz rig by N4EJW so hopes to be active soon.

VK6HK has built a beacon for 50.066MHz which should be on by now. Both he and VK6RO are looking for UK stations. SM6FZD told Mike that 25 special 50MHz licences will be granted in Sweden from November.

On August 10, ZS3AT (JG87) heard beacons CT0WW and 9H1SIX, 1643-1810UTC. As soon as equipment is don-

ated to him, SU1ER in Cairo intends to operate on the band. Now to news from the British Isles.

**Gerry Schoof G1SWH** added five more countries in August, GU4CJG/P (GUR) being his 18th country this year. **Clive Penna G3POI** (LDN) heard beacon ZD8VHF via F2-layer on August 2, 2130-2230, also on the previous day.

G3SED also copied it on the 1st, 2102-2135 at S7. Mike worked OX3LX at 1915 on August 5 for his first OX. He lists other assorted Europeans as "heard/worked" on August 7, 8, 11, 13 and 14. (I would appreciate your indicating which were worked, Mike.)

In his August 15 letter, **Ken Osborne G4IGO** (SOM) lists several Fs worked on July 31 plus ZBOE (XW) and CT4KQ/M (VA). In the evening there was some very short skip Es to PA and Gs in the Midlands. He copied ZD8VHF on August 1, 2101-2232. The 5th brought OX3LX and OX/OZ1FDH in mid-evening and GB4VR at 1907 the next day. Ken worked OH, D and PA stations on the 8th. An m.s. QSO was completed with LA6QBA (GW) on the 13th. Other QSOs in the day included 9H1EL, EA1MO (ZD) and FC1HIU (DD). LA6QBA was worked on m.s. again on the 14th, this time from FW square.

In August **Martyn Jones G4TIF** (WKS) added his 20th country on the 3rd, GU4CJG/P. On the 7th he lists three OHs in KP20 and KP30 plus back-scatter QSOs with GI6ATZ, GI8YDZ and GOHNW at QTE 330° and on the 8th b-s contacts at 210° with G3ZYY, GW4TTU and G4IGO.

**John Palfrey G4XEN** (NHM) worked CT4KQ/M (IN50) and F6AJW (IN93) who was running 200mW on July 31. The GJ beacon was heard via tropo for the first time that day and G4FHO and G3ZYY (CNL) were contacted. GU4CJG/P was a new county and country on the 8th.

**Ela Martyr G6HKM** (ESX) also worked the GU on August 3 and in a brief opening next day OH1AYQ (KP12). She contacted GB4VR in the evening of the 6th and OH1VR/2 on the 8th. At 1710 on the 28th Ela heard ZS6XJ who peaked S3 for a short while.

**John Fitzgerald G8XTJ** (BKS) says he now believes in m.s. having heard some long, loud reflexions. He started on the band on August 11 with 10W to a dipole his first QSO being GU8OGJ/P (ALD). OH and LA were heard via Es on the 12th and on the 14th and 17th John worked 9H1EL. Best UK QSOs were G6CZV (MCH), GW3JXN/A (DFD) and GW1PXM/P in XL square.

**Gerard Elliott G14OWA** (LDR) worked via Es on August 6 OH2BUW (KP20) at 2135, LA8WF (JO59) at 1903 on the 8th and on the 11th OH2BC (KP20) at 1935. LA6QBA/P (JP61) was contacted via m.s. later at 2305.

The July report from **Geoff Brown G4ICD** just missed last month's deadline. He enclosed copies of six log pages for July 31 when there was a "... massive ... G opening" 120 QSOs are recorded with stations from IO82/92 to IO97.

Geoff's August report lists LAs on the morning of the 14th but the big day was the 28th. The 9H1SIX beacon was S6 at 1630 and at 1717UTC he made the first GJ/ZS contact with ZS6XJ who was S8. At 1727 ZS6LN was S4. The signals did not sound of t.e.p. quality and, in view of the 9H1 reception, he suggests it was Es propagation to the Mediterranean latitudes then F2-layer to South Africa.

**Keith Boleat GJ6TMM** lists 30 G, GI and GM stations worked on July 31. He

**QTH Locator Squares Table**

Station	Band (MHz)			
	1296	430	144	Total
G3JXN	87	133	175	395
G3XDY	81	137	185	403
G3UVR	79	129	239	447
G6DER	78	110	183	371
G8PNM	63	98	128	289
G4FRE	63	136	84	283
GJ4ICD	59	119	253	431
G6MGL	59	89	141	289
G4NBS	59	103	102	264
HB9AOF	55	80	141	276
G4DEZ	48	37	248	333
G8GXP	45	151	331	527
G8ATK	45	91	143	279
G3COJ	44	103	186	333
G3IMV	42	122	406	570
G4RGK	38	107	262	407
G6HKM	35	101	191	327
G1KDF	35	93	163	291
G1EZF	32	93	249	374
G8HHI	31	106	148	285
G4ZTR	29	29	37	95
G4MUT	28	90	149	267
G6XVV	25	64	211	300
G6STI	22	66	128	216
G4FVK	20	46	75	141
G1EGC	14	80	198	292
G6MXL	10	36	81	127
G6AJE	5	57	95	157
G8LHT	4	71	135	210
G2DHV	2	6	31	39
G4AGQ	1	41	104	146
G4KUX	—	112	367	479
G4XEN	—	107	268	375
G0DAZ	—	114	249	363
G4SSO	—	84	227	311
G4DHF	—	—	307	307
G4TIF	—	107	198	305
G4SWX	—	—	293	293
I4YNO	—	—	270	270
G1LSB	—	126	125	251
G3NAQ	—	80	160	240
G6DZH	—	87	149	236
G3FPK	—	—	233	233
G4IGO	—	—	232	232
G1GEY	—	68	158	226
G4MJC	—	33	184	217
E1FK	—	47	168	215
GM4CXP	—	31	184	215
G4MEJ	—	—	213	213
GOEHV	—	75	137	212
G8LFB	—	—	209	209
G4YCD	—	—	197	197
GW4FRX	—	—	193	193
G8MKD	—	49	142	191
GM0BPY	—	57	129	186
G4DOL	—	—	183	183
G1IJUS	—	—	181	181
GJ6TMM	—	40	137	177
ON1CAK	—	—	172	172
GW6VZW	—	6	115	121
G4TGK	—	—	118	118
G0FEH	—	24	88	112
G1IMM	—	13	98	111
G8XTJ	—	—	108	108
G7ANV	—	—	103	103
G14OWA	—	—	101	101
G1SMD	—	—	93	93
GM0GDL	—	19	66	85
PA3EUS	—	18	57	75
GM0HBK	—	—	75	75
GOHEE	—	—	73	73
G8PYR	—	6	61	67
GU4HUY	—	—	67	67
G1CRH	—	—	62	62
G0HDZ	—	—	61	61
G1VTR	—	23	32	55
G1NVB	—	—	49	49
G7AHQ	—	—	34	34
GM0JOL	—	—	29	29
GM1ZVJ	—	—	21	21

Number of different stations worked since January 1.

Starting date 1 January 1975.  
No satellite or repeater QSOs.  
"Band of the month" 1296MHz.



got GB4VR on August 6, OH2BUW and LA9BM (JP40) on the 8th and LA6QBA/P and LA9WF on the 13th.

**John Hilton GM1ZVJ (LTH)** was still running 2.5W from his Yaesu FT-690R Mk 2 when he wrote but hoped to have more power and a 3-ele Yagi by now. Finally to Wales and **Paul Baker GW6VZW (GWT)** who did well on July 31, too, working some Fs, PAORDY, CT4KQ/M in IN50 and IN51, then lots of Gs later. GU4CJG/P was new on August 3.

## The 70MHz Band

**Bill Somerville-Large EI9FK (Wicklow)** was travelling around the Republic in August. On the 9th from Donegal (VO) he worked G3UVR, GOCZD, G4ASR, G3NAQ, G3NKS, G3UKV and G4MKF. From WP square next day G3UVR was worked in inferior tropo conditions on c.w. G8VZT and G3NKS were worked on m.s.

In the Perseids he operated from IO55TA and on the 11th completed with G0HHV and G4SEU despite considerable QRM from OK and SP broadcast stations via Es. On the morning of the 12th Bill completed with GW4HBK, G4HGT, G4MKF, G4TGB, G3APY, G3NAQ, G4ASR, G4AFJ, G3NKS, G8VZT, GOENR, G4SEU, G3UKV, GOAUI and G6VX.

Tropo conditions were as good as he could remember from IO51FN (Cork) on the 23rd from his usual /P site. 16 stations in G, GU and GW were worked.

G4XEN got going on the band on August 19 using a transverter made and loaned by G3MJW. It gives 25W, the prime mover being a Kenwood TS-430S. So far John's antenna is an 80m dipole.

**Colin Redwood G6MXL (DOR)** worked GU3TZ/P (ALD) on August 6 for a new one, as did **Dave Lewis GW4HBK (GWT)** on the 5th. His m.s. QSO on the 12th with EI5FK/P produced some one minute bursts. GU2HML was worked on the 22nd and Colin reckons there is more regular activity now than when he started in 1981.

## The 144MHz Band

The last letter from **Johan Van De Velde ON1CAK** arrived too late for last month so his news is now rather dated. However he and brother **Geert ON1CDQ** did well in this summer's Es events.

First the tropo reports, starting with **Dave Ackrill G0DJA (WMD)** who continues his c.w. activity. The FC1HPZ he heard on July 24 is not in Corsica, though. He is a class "C" licensee in France. The Corsica prefix has been TK for some years now.

**Andrew Salt G0HEE (YSS)** uses c.w. and his best August DX was GB4VR on the 3rd. On the 20th he managed to get through to GD4IOM on the Calf of Man with his 2.5W and appreciated the operator's great patience in completing the QSO.

G1SWH worked GB4VR (WIL), G4ZAP/P (IOS) and EI5BZB/P (Roscommon) on August 5. But Gerry's greatest delight was to contact EI5BZB/P again in Sligo to complete the entire 104 British Isles counties worked.

**Pat Billingham G4AGQ (SRY)** found tropo quite good on August 14 and worked F6GYH/P (DH) and HB9AOF (DG) on c.w. **Alan McMillan G4SSO (LDN)** worked four EA1s in VD, WD and XD squares on August 17 and later in the month contacted G6EBH/MM when Bernard was in AO square, a new one.

G4XEN's "lament of the month" was not working GB4VR, heard many times on

tropo. However John did get G4ZAP/P on the 5th. G6HMK was luckier and worked GB4VR on her first call at 1137 on the 6th. The previous evening Ela found EI6BA and EI9DQ in Cork.

Nothing was heard of the group in XH square but Ela did find FPA3DSB/P (YG) on the 10th. On the 14th the band was open to southern DL and stations in DJ, EI, EJ and FH were worked. She was also called by HB9SLU for the first HB of 1988. EA1BLA (VD) was contacted on the 17th.

**Irwin Brown G1JUS (ATM)** found tropo in August very disappointing, his only new one being GB4VR also worked by **Paul Thompson G6MEN (SPE)** and **Ian Harwood G8LHT (YSS)**. Ian also added IOS and ALD and worked OK1AXH (JO70) on August 7.

G1OWA worked GB4VR on August 2, GB2XS (XS) on the 16th and GB75ARN on the Isle of Arran on the 21st. GM1ZVJ's QSO's from home in August were all with other GMs. John operated as G1ZVJ/P between the 14th and 21st using only his FT-290R at 2.5W with its whip antenna. He worked just GJ, GU and F.

GW6VZW added GU4THB/P and F/HB9SAX/P (XH) on August 3, G4ZAP/P on the 5th and F1FEN/P (CE) on the 14th bringing Paul's squares total to 115.

Next probably the last Es report for 1988, that of July 31 in which at 1748 G4IGO heard EA1KV (VC) then worked EA8BEX (SN) at 1750. Between 1800 and 1825 Ken was hearing EA1BLA (VC) via Es-scatter when the EA was beaming to OZ. He worked him at 1821. G4TIF also heard EA1KV at 1749 but no QSO for Martyn.

G1JUS started at 1756 with an EA7 in WX and an FC1 in BI was heard at very short QRB. New ones for Irwin were EA7WM (WX), I5JUX (FD), F8CS (CH), IK1GYZ (DF), IK1LUT (DE) and FC1CCC (CG). The event finished at 1839. He mentions that after the Es finished there was some f.a.i. propagation from England to HB9 with the Gs beaming due south. Nobody else mentioned this.

G1OWA lists 19 QSOs between 1750 and 1838, which provided Gerard with nine new squares and HB9 for an all-time new country. Squares worked from WO were BC, CG, CH, DE, DF, DG, DH, EE, EF, FD, FE and FF.

Now to m.s. and majority opinion is that this year's Perseids shower was excellent. **Mark Page G1EGC (BKS)** thought operating was much better than last year. He completed on s.s.b. with UR1RWX (MT) in 20 minutes and with CT1WW (WB), SP9AMH (JK) and OY9JD.

G4SSO reckons the shower peaked between 0300 and 0500 on the 12th. In the run-up he completed skeds with UR1RWX (MT) and SP2NJI (JM) both in 40 minutes on August 9. Alan completed with OY9JD, UR1RYY, YU2CCB, YU3C, YU2QS, I2CVC/7, YT3ET/P (GG), OK3LQ, IOUZF and SM5BEI. Success rate about 40 per cent.

**Mike Ray G4XBF (SRY)** reckons his success rate was 50 per cent. He completed on c.w. with HG4KYB (JH) on July 29, YU7AU (KE) on August 6, YU2EZA (IG) on the 7th, UR1RWX on the 9th, YU2CCB (IF) and SMOEJY (IT) on the 10th and HG2NP/O (KH) and OE8HWQ (HG) on the 13th. Random contacts on s.s.b. completed in a single burst were SM5BEI (JU) on the 10th and HG1YA and OE3UP (IH) on the 12th.

G4XEN completed with UR1RYY on c.w. on the 6th for a new square and country, EA6FB (AY) on the 11th and

OY9JD on s.s.b. on the 12th which brings John's country total to 46.

Oddly G4IGO dismisses the Perseids as "... a non-event." G1JUS found it disappointing and Irwin only completed one of his four skeds; IK2DMF (EF) which was not new.

## The 430MHz Band

G1SWH worked GB4VR on August 5 and G6APZ/P (IOS) on the 7th for a couple of rare ones on this band. Other new ones for Gerry were G14FUM (ATM), G0DKM (AVN) and GM1TTY/A (DGL).

**Denis Jones G3UVR (MSY)** is just three cards short of the 100 for a QTHCC application out of his 129 squares worked. He worked the St Kilda station too. G4AGQ worked ON1CDQ in the contest on July 31 but Pat could not get his c.w. heard by PAORDY on August 7.

G4XEN worked G6APZ/P (WJ) on August 7 which was John's first new square for nine months. Tropo was quite good on August 7/8 but nothing new; best DX was DG2BAW (JO43LD) at 2145 on the 7th.

G6HMK reckons the July 31 low power contest was "... almost unmentionable." Ela only made 32 contacts including ON1CAK and ON1CDQ and six PAs. On August 7 at 0640 she worked OK1AIY/P (GK) and again at 0708 during a contest. He was only running 4W. DK6AS (FM) and Y23BD (GM) were also worked. The evening of the 8th brought QSOs with SM7ECM and SM7LAD (GP) and G6APZ/P when she had a newly licensed amateur in the shack.

G8LHT worked OK1AXH (JO70) on August 7, Ian's only long DX of the month. He worked GU4XGM/P (ALD) too as did G6MXL. Colin also found GW8LNR/P (PWS) in the contest on July 31.

**Jim Rabbits G8LFB (LDN)** has recently acquired an Icom IC-402 but no antenna as yet. Even so, on August 7 he took it into the garden and with just 3W to its quarter wave whip worked OK1AIY/P. Naturally he is quite sold on the band after that.

## The Microwave Bands

The MEB Radio Club's activity evening on July 26 saw G6MEB/P operating on 10GHz from Walton Hill Clent. On wideband f.m. QSOs were made with G4WAC/P on Lickey Hill, G1RLR/P on Barr Beacon at 21km and G8HMV operating from his new QTH near Titterstone Clee, 35km away. On 24GHz wideband f.m. G3AYJ/P on Barr Beacon was worked.

The foregoing news from G0DJA who was QRV from Shining Tor, near Leek, in the 10GHz Cumulatives session on Aug 7. This QTH is 559m a.s.l. with a good westerly take off. He worked GW3UYM/P on Halkyn Mountain at 80km and GD3ZME/P, the Telford Club who had travelled to Snaefell, a QRB of 196km.

Dave is scheduled to give his 10/24GHz talks to the Redditch Club on November 10, the Willenhall Club on November 16, a return engagement, and the Cannock Club on December 8.

**Bryn Llewellyn G4DEZ (ESX)** operated on 1.3GHz in the August 14 Trophy Contest and worked GW3JXN/A on c.w. His best DX was GI4OPH at 529km.

G6HMK found 1.3GHz open on the evening of August 6 but with sparse activity. Ela had a half hour chat with PE1EWR. DG6EAE (DL) was also worked. The next morning she contacted DK6AS (FM), DC5JM (DL), PA0QC (CM) and PE1EWR again.

On the 8th there was a small duct to OZ



All messages shall consist of the following: (A) Time of start of contact in UTC, to consist of a four-figure group. This information must be passed in both directions and logged. Expressions like "same" or "same as yours" are not permitted. (B) RST reports, normal three-figure group. (C) Message number, this will consist of a three-figure number starting from 001 for the first contact made on the band and running consecutively from this number. (D) Locator, Universal (Maidenhead) is preferred, or QTH given as a town or a bearing and distance in km from a town (max 25km). The town must be identifiable on a 1:500 000 tourist or route map.

The log must contain, date, time of start of contact, RST report and message number sent, locator received, estimated distance and points claimed. It is helpful to include your own locator at the top of every log sheet. Copies of forms and log sheets are available from the Contest Manager.

The scoring is as follows:

0–50km = 1 point; 50–100km = 3 points; 100–150km = 5 points; 150–200km = 7 points; 200–250km = 9 points; 250–300km = 11 points; 300–350km = 13 points; 350–400km = 15 points; 400–450km = 17 points; 450–500km = 19 points and pro rata on 50km radial increments.

Certificates will be awarded on the top scores and runners-up in each section: (1) single operator or stations UK and Europe. (2) multiple operator stations UK and Europe. (3) short wave listeners UK and Europe.

Logs must be postmarked no later than November 19 to qualify and they must be sent to: BARTG Contest Manager, Peter Adams G6LZB, 464 Whippendell Road, Watford, Herts WD1 7PT.

I hope to have my new mast and 144MHz antennas installed before this contest, so hopefully some of you will hear me and give away a few points! For those who haven't tried RTTY on v.h.f. and are thinking about having a go, RTTY will be found on 145.3MHz for a.f.s.k. signals (that's F2B) though most activity will be found around 144.6MHz F1B or J2B plus or minus. It does get rather congested, so be patient. Don't get confused by packet activity on 144.65MHz.

## Computing News

The Public Domain Software Library has completely re-organised the cataloguing of the library. So much so that it is unrecognisable from the previously much-criticised document—at least as far as MS-DOS is concerned. For those who may not have heard of the PDSL, it is exactly as the title suggests, a library of public domain (free) software. The only charges made to customers cover copying and administration. This can make for very reasonably priced software.

The main changes that have been made are to list all the MS-DOS programs in subject order, rather than catalogue number. So, if you're interested in communications—look under communications, etc. There's even a section on amateur radio, unfortunately it's filed under "ham radio".

To give you an idea of approximate cost, from one to four disks (each one containing several programs) will cost you £4.50 for each disk. This includes the cost of the disk (you don't have to send one of your own) and all the postage charges and VAT, etc. If you join the library, the cost goes down to £3.50. Also if you're a member you can send in your own disk and the copying and admin charge drops to £2.30 each disk for up to nine disks.

For details of the service and a catalogue, send a large s.a.e. (enough to take an unfolded A5 booklet) to: PD Software Library, Winscombe House, Beacon Road, Crowborough, Sussex TN6 1UL.

I recently made it to the BARTG rally at Sandown Park and used the visit to check up on current computer prices. I found the exercise quite interesting as the spread of prices and value for money was amazing. These are the sort of prices I found:

Atari 800XL – £30\*  
BBC-B – £195\*\*  
BBC Electron – £35\*  
Commodore +4 – £20  
Commodore C16 – £30\*  
Commodore Vic-20 – £25\*  
Mitac IBM compatible – £410\*\*  
Sinclair Spectrum – £70\*\*  
Sinclair Spectrum+ – £80\*

If there is a single star, that means I only know of limited amounts of software available for that machine, two stars is plenty available, but those with no stars have very little available. That's unless you know different.

## Help for Newcomers

Ian Brothwell, the Secretary and Publicity Officer for BARTG, has recently sent me a copy of a new booklet called *Amateur Radio Data Comms & BARTG*. The booklet is available free-of-charge, provided you enclose an A5 or larger s.a.e., from: BARTG, Mrs Pat Beedie GW6MOJ, Ffynnonlas, Salem, Llandeilo, Dyfed SA19 7NP.

The object of the publication is to provide some basic information for newcomers to the data modes. It starts with some quite interesting historical facts covering the origins of RTTY. This is followed by a brief description of TOR, packet and FAX. The next section gives some background behind the actual operating techniques in use today, including taking the reader through a typical RTTY and AMTOR QSO. They've even provided a subs form on the back page!

## BARTG AGM

Contrary to popular belief, this isn't a BARTG take-over bid, but their AGM deserves a mention (anyway next month will be too late!).

The AGM will be held on November 5 (so you'll miss bonfire night unless you live close by) at the Churchill Room, London-House, Mecklenburgh Square, London WC1. Everything kicks off at 2pm. Apparently, London House is close to the junction of Grays Inn Road and Guilford Street, just a few minutes walk from Kings Cross and St Pancras.

One of the issues to be discussed is a proposed change of the group's name by replacing the word "teleprinter" with "telidata". That's because BARTG is no longer solely concerned with mechanical RTTY, but also now encompasses computer RTTY, packet radio, AMTOR and FAX.

Now the other important bit, refreshments will be provided.

Reports to Pat Gowen G3IOR  
17 Heath Crescent, Hellesdon, Norwich, Norfolk NR6 6XD.

## Amateur Satellites

### Unlucky 13? Mode "B"

Large numbers of reports have been coming in on the status and operational characteristics of our new Phase IIIC satellite. It is now in its final orbit, and said to be at the correct attitude for the optimum compromise of earth pointing and solar-cell efficiency. **G4JY** reports working WB5HRD, VK5ZJ and VK5ED using 40 watts of uplink r.f. power to a 16dB-gain helix. **G3ABU** has worked into VK and has had eight W QSOs using just 8 watts of power, whilst **G0DLC** reports working many W and European stations.

Some users claim that OSCAR-13 is superior in performance to its predecessor, OSCAR-10, during the post-launch phase of that satellite, but the majority complain of poor sensitivity, a weak downlink and bad spin modulation. Most certainly, my attempts to use the satellite have resulted in findings common to the majority, with the powers claimed to be needed published in the earlier articles on

this topic being insufficient to give an adequate downlink for reliable QSOs on Mode "B". **Vern Riportella WA2LQQ**, AMSAT President, believes the performance to be superior to that of OSCAR-10, and that degradation of Mode 'B' users' feeders and antennas from weathering over the years could be responsible for the findings of inferiority stated. He recommends that full attention should be given to the station receive capability, and aim it so that the beacon on 145.812MHz, allowing for the 1.6dB sky noise, should give a level of 12dB over noise for an effective system.

**Ron Broadbent G3AAJ**, Secretary of AMSAT-UK, feels that the results discovered are very similar to the older satellite. At G3IOR, the average signal only barely moves the S-meter, and an uplink of 50W of r.f. to a -2dB feedline and a 16dB-gain, right-hand-circular crossed G3HUL Yagi resulted in a RS 3 & 0 signal return using a crossed right-hand circular 10-element Jaybeam Yagi of some 13dB gain feeding

a MuTek front ended IC-521. This calculates to a 1.25kW e.r.p. uplink, and should have given a solid 5 and 2 downlink to the receive system in use if we relate this level to the required specifications involved. This was found to be true for OSCAR-10, but lacking for OSCAR-13.

It has to be admitted that the satellite a.l.c. system was probably activated by some of the persistent "alligators" present, but the fact remains that they were the only ones who seemed to be giving adequate signals over the noise. At the same time, the noise floor of the transponder could clearly be heard varying with the rotation, which would not formally be expected under such circumstances. It therefore appears that the sensitivity is not lacking, but it is just possible that high solar noise from our now activated sun is responsible, or it may indicate noise from an internal source, as this symptom is absent on the earlier satellite.

The spin-modulation which was brought about by the damaged antenna on the

Practical Wireless, November 1988

# AERIAL TECHNIQUES

## VIEW OUR COMPLETE RANGE OF PRODUCTS

Send for our 22 page illustrated catalogue, priced 75p.



INSIDE OUR CATALOGUE Multi-standard Televisions, Monitors, Aerial Rotators and many more items. Our extensive listings cover domestic, fringe and DXing installations within Bands 1 to 5 inclusive. Aerial Techniques provide a complete and comprehensive consultancy service for ALL reception queries and problems. Would you like to receive an extra ITU Channel at little extra cost? Why not send for our catalogue including an SAE together with details of present ITU region received. ACCESS and VISA Mail and Telephone orders may be placed for any product listed in our Catalogue. We are active TV-FM DXing specialists - your guarantee of honest and knowledgeable advice.

11, KENT ROAD, PARKSTONE, POOLE, DORSET BH12 2EH  
Tel: 0202 738232

# S.E.M.

UNIT P, UNION MILLS, ISLE OF MAN  
Telephone: (0624) 851277

Some comments on our QRM Eliminator in the last few days. "It works like magic". "Locals thought I was exaggerating until they heard it". "I'm phoning from Florida to say it's reduced my power line noise to zero. I can talk to my English friends again".

**S.E.M. QRM ELIMINATOR.** Unique design gets rid of any local interference. Connect in your aerial lead and removes QRM before it gets to your receiver (you can transmit through it). Any sort of interference, it can be next to your rx (your computer) or several miles away, e.g. power lines. £69.50 ex stock. As the P.W. review says "Does it work? Yes it does."

**S.E.M. TRANSMATCH MKIII.** The only Aerial Matcher with UNBALANCED and TRUE BALANCED OUTPUTS. 1 kW 1.8-30 MHz, £135. Built-in EZITUNE (see below), £39.50. Built-in Dummy Load, £9.90. Ex stock.

**EZITUNE.** Allows you to TUNE UP on receive instead of transmit. FANTASTIC CONVENIENCE. Boxed unit, £45.00. P.C.B. and fitting instructions to fit in any ATU. £39.50.

**FREQUENCY CONVERTERS.** V.H.F. to H.F. gives you 118 to 146 MHz on your H.F. receiver. Tune Rx. 2-30MHz, £59.50 ex stock. H.F. to V.H.F. gives you 100 kHz to 60 MHz on your V.H.F. scanner, £49.50 ex stock. Plug in aerial lead of any receiver. Tuning from 100MHz up.

**2 or 6-METRE TRANSMATCH.** 1kW, will match anything, G2DYM or G5RV? £35.00 ex stock.

**DUMMY LOAD.** 100 W. THROUGH/LOAD switch, £24.00 ex stock.

**VERY WIDE BAND PRE-AMPLIFIERS.** 3-500 MHz. Excellent performance. 1.5 dB Noise figure. £32.00 or straight through when OFF. £37.00 ex stock.

**R.F. NOISE BRIDGE.** 1-170 MHz. Very useful for aerial work. £45.00 ex stock.

**IAMBIC MORSE KEYER.** 8-50 w.p.m. auto squeeze keyer. Ex stock. Ours is the easiest to use. £45.00. First class twin paddle key, £20.00 ex stock.

**TWO-METRE LINEAR/PRE-AMP.** Sentinel 40: 14x power gain, e.g. 3 W - 40 W (ideal FT290 and Handhelds), £85.00. Sentinel 60: 6x power, e.g. 10 W in, 60 W out, £95.00. Sentinel 100: 10 W in, 100 W out, £135.00. All ex stock.

**H.F. ABSORPTION WAVEMETER.** 1.5-30 MHz, £39.50 ex stock.

**MULTIFILTER.** The most versatile audio filter. BANDPASS Hi Pass, Lo Pass and two notches. Frequency and Bandwidth adjustable 2.5 kHz-20 Hz, £75.00 ex stock.

**HIGH PASS FILTER/BRAID BREAKER.** Cures T.V.I., £7.50 ex stock.

**CO-AX SWITCH.** Three-way + earth position. D.C.-150 MHz, 1kW, £25.00 ex stock.

**12 MONTHS COMPLETE GUARANTEE INCLUDING TRANSISTORS**

Prices include VAT and delivery. C.W.O. or phone your CREDITCARD NO. Ring or write for further data or catalogue. Orders or information requests can be put on our Ansaphone at cheap rate times. Remember we are as near as your phone or post box.

# ANTENNA TUNER

FOR Outside or INDOOR ANTENNAS, end-fed LONG WIRES or dipoles, BOOST DX and reduce interference 100KHz-30MHz in 6 overlapping ranges, IDEAL for FRG7700 etc or 10W tx, ALSO connect voltmeter for FREE WAVEMETER etc, only £31.30, hear WEAK DX.

V.L.F.? EXPLORE 10-150KHz, Receiver £28.20.

**ANTENNA NOISE BRIDGE,** measure antenna RESONANCE 1-160MHz and RADIATION RESISTANCE 2-1000 ohms, only £27.90, get ANSWERS and MORE DX.

Each fun-to-build kit (ready-made to order) includes all parts, case, pre-wound coils, PCBs are fibre glass, instructions, by-return postage etc. and list of other kits.

## CAMBRIDGE KITS

45 (PL) Old School Lane, Milton, Cambridge.



**Bredhurst**  
electronics



SITUATED AT SOUTHERN END OF M23 — EASY ACCESS TO M25 AND SOUTH LONDON

HF RECEIVERS	£ (c&p)	2.M. TRANSCEIVERS	£ (c&p)	STATION ACCESSORIES	£ (c&p)
Icom ICR71	855.00 (—)	Kenwood TH21E Handheld	189.00 (—)	MC 50 Desk Microphone	46.08 (2.00)
Kenwood R2000	595.00 (—)	Kenwood TR751E 25W multimode	599.00 (—)	MC 60A Desk Microphone with Pre-amp	88.22 (2.00)
Kenwood VC10 V.H.F. Converter	161.94 (2.00)	Kenwood TS711E base station	898.00 (—)	MC 55 Mobile Microphone with Control	52.67 (1.00)
Kenwood R5000	875.00 (—)	Kenwood TH205E Handheld	215.26 (—)	MC 35S Hand Microphone 4 pin	21.72 (1.00)
Yaesu FRG8800	639.00 (—)	Kenwood TH215E Handheld	252.13 (—)	MC 43S Up/down Hand Microphone 8 pin	22.22 (1.00)
Yaesu FRV8800 V.H.F. Converter	100.00 (2.00)	Kenwood TW4100E 2m/70cm FM Mobile	499.00 (—)	MD188 Base Microphone	79.00 (2.00)
Lowe HF125	375.00 (—)	Kenwood TM221ES 45W Mobile	317.00 (—)	LF 30A Low Pass Filter 1kW	32.26 (2.00)
		Kenwood TH25E Handheld	258.00 (—)	SP 40 Mobile Speaker	21.06 (1.00)
		Yaesu FT2901 Portable multimode	429.00 (—)	HS 7 Miniature Headphones	15.80 (1.00)
		Yaesu FT23R + FN10 Handheld	254.50 (—)	YH 77 Light Deluxe Headphones	19.99 (1.00)
		Yaesu FT736R Multimode VHF/UHF Base complete		HS 5 Deluxe Headphones	37.54 (1.00)
		with 2m, 70cm and duplex	1450.00 (—)	CS 100 Mobile Speaker	13.50 (1.00)
		Icom IC2GE Handheld	265.00 (—)	VS 1 Voice Synthesizer Module	32.26 (1.00)
		Icom IC02E Handheld	279.00 (—)	VS 2 Voice Synthesizer Module	32.26 (1.00)
		IC228E 25W mobile	365.00 (—)	GCS Icom World Clock	43.00 (2.00)
		IC275E base station inc PSU	1069.00 (—)	CD6000 IC/RTTY Decoder	215.14 (2.50)
		IC3210E 2m/70cm FM mobile	499.00 (—)	KPC2 Kantronics Packet Communicator	159.00 (2.50)
		IC Micro II Handheld	249.00 (—)	Kent Morse Key Kits	29.50 (2.50)
				Kent Twin-Paddle Morse Key Kits	38.50 (2.50)
<b>HF TRANSCEIVERS</b>					
Kenwood TS940S	1995.00 (—)	Kenwood TH41E Handheld	218.00 (—)	<b>ANTENNA BITS</b>	
Kenwood TS440S	1138.81 (—)	Kenwood TS811E base station	998.00 (—)	HI-Q Balun 1:1 5kW P.E.P.	13.95 (1.50)
Kenwood TS680S	985.00 (—)	Kenwood TH405E Handheld	273.18 (—)	Bricomm Balun 4:1 1kW	13.80 (1.50)
Kenwood TS140S	862.00 (—)	Kenwood TH415E Handheld	298.85 (—)	Bricomm 7.1MHz Epoxy Traps (pair)	10.95 (1.50)
Yaesu FT980	1795.00 (—)	Kenwood TM421ES 35W Mobile	352.84 (—)	Self Amalgamating Tape 10m x 25mm	4.25 (0.75)
Yaesu FT757GXII	969.00 (—)	Yaesu FT73R + FN10 Handheld	274.50 (—)	T-piece polyprop Dipole centre	1.60 (0.25)
Yaesu FT767GX	1550.00 (—)	Icom IC4GE Handheld	299.00 (—)	Small ceramic egg insulators	0.65 (0.20)
Yaesu FT747GX	659.00 (—)	Icom IC04E Handheld	318.00 (—)	Large ceramic egg insulators	0.85 (0.20)
Icom IC735	978.00 (—)	Icom IC4751E base station inc PSU	1185.00 (—)		
IC751A	1500.00 (—)	IC Micro 4 Handheld	299.00 (—)		
<b>V.H.F. SCANNING RECEIVERS</b>					
Icom ICR7000	989.00 (—)	Kenwood TH41E Handheld	218.00 (—)	<b>CABLES ETC.</b>	
Yaesu FRG9600M 60-950MHz	509.00 (—)	Kenwood TS811E base station	998.00 (—)	URM67 low loss coax 50 ohm	per metre 0.75 (0.25)
A.O.R. AR2002	487.30 (—)	Kenwood TH405E Handheld	273.18 (—)	UR76 50 ohm coax dia 5mm	per metre 0.30 (0.10)
Signal R535 "Airband"	249.00 (—)	Kenwood TH415E Handheld	298.85 (—)	UR70 70 ohm coax	per metre 0.35 (0.10)
Sony 7 hand held	249.00 (—)	Kenwood TM421ES 35W Mobile	352.84 (—)	UR95 50 ohm coax dia. 2.3mm	per metre 0.40 (0.10)
Sony PRO 80 New Sony Receiver	349.00 (—)	Yaesu FT73R + FN10 Handheld	274.50 (—)	4mm Polyester Guy Rope (400kg)	per metre 0.25 (0.10)
WIN 108 Airband Receiver	175.00 (2.00)	Icom IC4GE Handheld	299.00 (—)	50mtrs 16 swg hard drawn copper wire	6.95 (2.00)
		Icom IC04E Handheld	318.00 (—)	75ohm Twin feeder light duty	per metre 0.20 (0.10)
		Icom IC4751E base station inc PSU	1185.00 (—)	300ohm Slotted ribbon cable	per metre 0.32 (0.10)
<b>V.H.F. SCANNER ACCESSORIES</b>					
A.K.D. HFC1 HF Converter	49.00 (1.00)				
Revcone Discione Antenna 30-500MHz	32.16 (3.00)				
Icom AH7000 Antenna 25-1300MHz	82.50 (3.00)				
<b>ANTENNA TUNER UNITS</b>					
Yaesu FRT7700 Short wave listening	59.00 (2.00)				
Yaesu FC757AT	349.00 (—)				
Kenwood AT230	208.67 (2.50)				
Kenwood AT250 auto	366.00 (—)				
<b>ICOM ICR7000 RECEIVER</b>					
Complete with AH7000 ANTENNA Special Price £989					

GOODS NORMALLY DESPATCHED WITHIN 24 HRS - PRICES CORRECT AT TIME OF GOING TO PRESS - E&OE - MAIL ORDER AND RETAIL

BREDHURST ELECTRONICS LTD HIGH ST, HANDCROSS, W. SX. RH17 6BW (0444) 400786

earlier OSCAR-10, was not expected on OSCAR-13, but the spinning fade pattern is very marked indeed when the satellite is not pointing within some ten degrees to the user.

The AMSAT-DL design team believe that this problem was brought about by the last minute fitting of the Mode "S" antenna to one of the arms, which, combined with a resonant spacecraft structure, has produced a marked change of lobe patterning on the 145MHz Mode "B" downlink. It is also possible that the attitude of the antenna itself to earth may be "skewed" due to this problem, as although the positioning was shown to be A.LONG 180 and A.LAT 0, a marked difference in the sensitivity and the downlink performance was noticeable according to the position of the spacecraft to the user station. When the satellite was in the west, the American stations seemed to be getting good signals from the Europeans, but the users on the eastern side of the Atlantic were having great difficulty. When OSCAR-13 was to the east of the user, then things seemed far better, with less spin modulation and a stronger downlink too, but stations one was in contact with who were west beaming to the satellite were reporting similar problems to that earlier suffered by the Europeans attempting to work Ws. Most certainly when the satellite was at a high angle of elevation between 180 and 90 degrees azimuth, it performed better than at other times. By the time this column is with you for reading, the orientation will have changed to A.LONG 210 and A.LAT 5, and it will be interesting to compare the effect of this manoeuvre.

The mean anomaly times for the commencement and termination of the different modes of operation are slowly changing according to sun angle and optimum earth pointing, the latter being very important for "L" mode.

Two states of Mode "B" exist at this time, that with the beam antennas switched on when the mean anomaly shows that the spacecraft is at either side of apogee (at optimum pointing close to apogee Mode "L" or "JL" is placed on) and another "B" mode using the omnidirectional antenna when the satellite is inverted and closest to earth near to perigee. This latter "QRP" mode seems to perform very well indeed, with very good downlinks despite the lack of antenna gain, so indicating further that it is mainly a matter of whether the antennas are "looking at you" or otherwise.

We also have to remember that the optimum satellite position for the northern hemisphere has yet to be reached, as the apogee is currently far less than the inclination, currently occurring at 7.5 degrees north. As can be seen by Fig. 1, a computer print out from the "sopp4" program for the end of 1991, we are then looking at some 16 hours of continuous communication daily, as by that time the high apogee point will be occurring much further north. To evidence this point, compare the computer Mercator maps made by WA2LQQ from AMSAT's Amateur Satellite Report. The map in Fig. 2 shows the ground track as in mid-August 1988, with the four circles denoting where the successive apogees occurs. The map in Fig. 3 shows it five years hence, Fig. 4 ten years hence and Fig. 5 in February 2003. It can be confidently expected that as this apogee sub-satellite point moves north, far better results for the majority users in the northern hemisphere will come about. After

AMSAT RMS-81 TRACKING SYSTEM						
>>G3IOR VIA OSCAR 13 <<						
DAY	ROS	LOS	MAX	DX/EL	RZ	
30DEC	0102	1118	0558	12335	256	
30DEC	1549	2119	1725	17195	021	
30DEC	2353	1010	0451	11152	250	
31DEC	1454	0007	1618	17424	018	
31DEC	2245	0901	0345	9910	872	
01JAN	1354	1903	1511	17518	002	
01JAN	2140	0751	0238	9478	091	

Fig. 1

reaching 57 degrees north in February 1993 the apogee will slowly move back south again, so we have much good communication to look forwards to in the years to come.

### Mode "L"

The results on Mode "L", 1269MHz up 435MHz down, are not near the high sensitivity expected. Current reports indicate that whilst levels of 29dBW, or 800W e.r.p., will work under the ideal conditions, powers of 38dBW, 5kW e.r.p., such as provided by 50W of r.f. to a 20dBi antenna, or 100W to a 17dBi antenna, are more normally needed for reasonable communications. Under most active conditions, 6.5kW e.r.p. have been shown to be required. When the pointing angle of the 1269MHz helix satellite uplink antenna is bad no amount of logical level of amateur possible power seems to work! Apart from the beamwidth limitations, the reason is thought to be either terrestrial military spread spectrum transmissions or radar attenuating the transponder, as when the spacecraft's receiver antenna is beamed to earth, some 10 to 14dB of attenuation is shown by the telemetry even when the passband is devoid of amateur signals. When it is beaming away from earth to space, 0dB is shown.

By virtue of optimum pointing, high power and high-gain antennas, a number of good signals are to be clearly heard on the passband, but there would now seem to be little hope for the mobile and low power possibilities earlier thought to be possible with the 1269/436MHz transponder. Mode "L" on OSCAR-13 is however far superior to its predecessor OSCAR-10.

### Mode "J"

By far the best mode of the new satellite appears to be the 145MHz uplink 435MHz downlink, as 10W to a 13dB gain right-hand circularly polarised Yagi gives a good downlink signal when using a 13-element

right-hand circularly polarised 435MHz receiving Yagi, e.g. an uplink of 200W e.r.p. is enough even at Apogee. Many stations using less than this can be heard and the passband is full of signals from all over the world. Indeed, this very success is in itself a disadvantage, as will be foretold.

The uplink running from 144.425 to 144.475MHz was primarily intended, as explained in our last column, for the use of stations in countries where by reason of cost, availability or licence restrictions, access to the Mode "L" downlink passband was not possible. To quote Dr. Karl Meinzer DJ4ZC, "the originally planned frequency of 145.925 to 145.975MHz became impossible to use due to the many f.m. stations which do not observe the bandplan and thereby interfere with satellite communications worldwide". The projected use of the new uplink band was notified to all IARU Radio Societies some two years ago, but not a single adverse comment, criticism or objection of any kind was received. Although the uplink used is not currently part of the IARU Region 1 band plan, it may, of course, be used by amateurs within the terms of their licence subject to the usual non-interference clause, which means fundamentally that one does not commence transmitting on a frequency already obviously in use, which in turns means monitoring first. The story heard is that some forty stations centred around the DARC HQ contacted the said society in protest at the use of the new uplink resulting in demands that the Mode "J" transponder should be closed down! As this seems centred in that area where the IARU agreement on the non-use by terrestrial stations and f.m. repeaters of the 145.800 to 146.000MHz spaceband has not been applied, we have a paradoxical situation!

It really comes down to the situation where in some densely populated areas, spectrum space is short, collisions between different mode users are apt to occur when sharing a common band, but, if one obeys the conditions of the licence and the amateur code of conduct, they should be infrequent. For most of the time satellite users will be beaming skywards with narrow band transmissions and modest powers, and are hence unlikely to cause much of a problem. In the vast majority of areas, such as East Anglia, Scotland, or indeed the majority of Europe other than the really big densely populated towns, this section of the 144MHz is

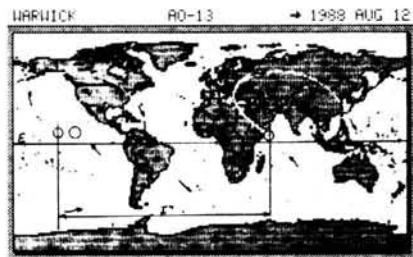


Fig. 2

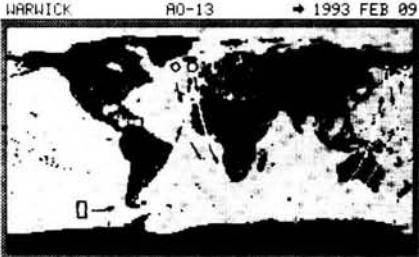


Fig. 3

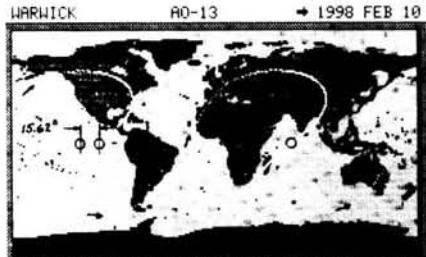


Fig. 4

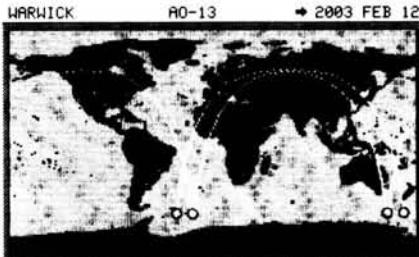


Fig. 5

rarely, if ever, used, and no problem exists. The high cost of equipping for Mode "B" and "L" at the power levels now known to be necessary deny the use of these modes to the majority of radio amateurs, whilst most have a station receiver and a 144MHz transmitter available, only needing to add a modestly priced 430MHz receive converter.

## "Magic" Numbers

The problem of determining your uplink frequency required for a given downlink, or vice versa, can become rather tedious, especially when using an inverting transponder. The task is simplified, and undesirable QRM and v.f.o. swishing can be avoided by merely using the following numbers, which are found by adding the zero Doppler shifted uplink to the resulting downlink. Thus, by subtracting the uplink from the figure, we get the downlink, and by subtracting the downlink from it, we obtain the uplink required.

For Mode "B", the number is 581.398MHz. As an example, near mid-band, if we subtract the 145.890MHz downlink from 581.398MHz, we get 435.508MHz, the uplink frequency needed to place us on 145.890MHz plus or minus a little Doppler shift correction.

For Mode "J" it is 580.413MHz, thus subtracting say our downlink of 435.965MHz, we get our uplink of 145.448MHz, or, by taking away our 145.448MHz uplink, we get the 435.965MHz downlink where our signal appears.

With Mode "L", it is 1705.356MHz. Thus, our downlink of 435.860MHz requires a signal sent up on 1269.496MHz to be present on that given downlink, and vice versa. Readers will note that this is a considerable departure from the previously published transponder relationships of some 21kHz. All frequency relationships supplied are within 1kHz of product.

Mode "S", at the time of writing, was awaiting a good earth pointing of the antenna, which up to that time had not resulted. Thus, it will not be until after the first tests due just before you are reading this that we shall know the exact uplink and downlink relationships.

## The RUDAK

Despite the fact that the RUDAK system was tested exhaustively on a water tower near Munich for two years without any sign of a problem, now it is in orbit and out of reach to the engineers (but not the commanders) critical problems are evidenced. The problem manifested is that when attempts are made to bootload the PROM of the packet digipeater, the RUDAK CPU runs for a short time, and then hangs up, and the 10 byte loader does not permit the special program to be loaded into RAM. It is possible that a malfunction due to low temperature may be the cause, so plans to activate the adjacent Liquid Ignition Unit and so heat the RUDAK may yet prove effective. Valiant efforts are being made to try to sort out the problem by the AMSAT-DL team, who have wreaked miracles before now when they wrestled with the memory problems of OSCAR-10.

## RS-Satellites

According to recent information from **Andy Mironov RS3A**, it would appear that we may well have heard the last of the

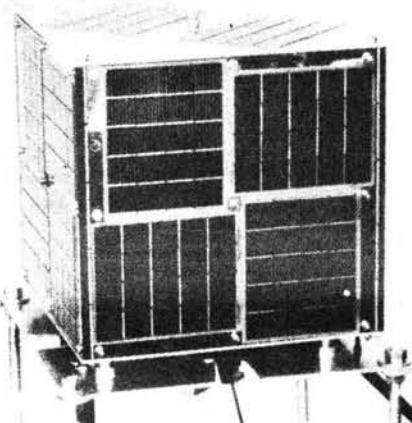


Fig. 6

two remaining members of the mass COSMOS RS3 to 8 inclusive launch. Whilst attempts to command them on will still be attempted from time to time, there appears to be little hope of success.

RS-10/11 is still on continuously and providing lots of DX. **Hank Hincks G3ASM** of Harburn near Stockton on Tees sends his impressive list of contacts made since starting off in mid-May this year, with many of the stations worked frequently. In the first fortnight, he had QSOs with UV1AS, I5YT, DL1NN, HG5N, UA3GCD, F6DJW, UA1DRQ, YO3RG, SM5GLC, SM0KV/O, PA2GER, VE2QO, F9EA, UB4UMY, 4K0DR, UA1AJA, UV1AP, UA1JR, UA3DH, NG1I, W1JSM, R4GR, and VE1BB. In June his log shows VE8RCS, DJ5XO, UA1QAW, G3IOR, UL7TCB, UA3JD, UC2OX, IN3YNBZ, W1NU, UR2NR, Y26IL/A, UA4FBI, UA9FIZ, SM7BYU, UA1NA, UA9CF, RB5IRF, UT5IT, UA1QEK, UR2FL, KC5CC, RS3A, then UL7MU, UT5IT, UL7CR and OZ1US by the beginning of July. Hank uses a single vertical attached to the rear of his house for his 25W '9130 144MHz transmitter and listens on a '930 using his 3-element tri-bander beam. Naturally, he has a strong preference for c.w., by far the best mode for good satellite DX QSOs.

## FO-12

Still we have no long term schedule for "Fuji", and either have to take pot luck or try to update the activity times and modes by information on the AMSAT nets. The frequency of 145.885MHz is being used extensively for packet radio in Japan, and high levels of use of the digital "JD" mode are in evidence. Some good news for 430MHz users (especially e.m.e. enthusiasts) is that the dreaded Syledis QRM is being asked to move. The bad news is that the wide band Syledis system may now move 2MHz up into the satellite space band!



Fig. 7

## UoSAT

Suddenly, without any apparent reason, signals are being heard from the 14.0014MHz OSCAR-9 alias UoSAT-1 h.f. beacon. The 21.0014 beacon is on regularly, but the reason for the non-appearance of the lower frequency beacons has long been understood to be the snagging by wiring of the gravity gradient boom, which the h.f. beacons use for an antenna. Whilst it is just possible that the boom may have deployed, it is felt doubtful, especially as the signals are quite weak, some 2dB below the 21MHz companion, which does not exactly bend the S-meter! If one listens carefully between the low end c.w. earth signals, one may hear the new arrival sending carrier, followed by ten channels of telemetry, followed by the call "AMSAT". It is a valuable propagation indicator and may well be heard both sub-horizon and antipodal, especially in late October, through November and early December. The UoSAT team at the University of Surrey would appreciate reports on both beacons, especially unusual and relative hearings.

## New Sats

A place has been booked by the University of Surrey and AMSAT on the "SPOT-II" imaging satellite V-34 ARIANE-4 launch due in June 1989. Six AMSAT satellites are due to fly in all, four being a new class of ultra-compact "microsatellites" of similar design but different purpose. One will be the BRAMSAT Peacemaker voice synthesiser, also called DOVE for Digital Orbiting Voice Encoder, one a CAST (Center for Aerospace Technology) earth-looking low resolution c.c.d. camera, and the others PACSAT packet radio transponders from AMSAT-NA and AMSAT-LU. As can be seen in Fig. 6, they are very small and light, being only 230mm each side, and weighing less than 10kg. They will be placed into an 822km sun-synchronous circular orbit at 98.7° inclination, and will thus provide world wide coverage. More details on these will follow in our future columns.

The UoSAT-C NASA Delta-C launch earlier announced is now postponed, so the UoSAT will now split the original large UoSAT-C load and have a common launch of UoSAT-D and UoSAT-E as separate spacecraft with the microsats into a similar orbit. The primary payload on UoSAT-D will be the Packet Radio Communications experiment, with 4 megabytes of memory available to all radio amateurs worldwide with AX.25 compatibility. It will use 9600 baud f.s.k. on both uplinks and downlinks using Mode "J", e.g. 144MHz up and 435MHz down, and will function without the need for high gain antennas. One mode included will be a special high power form that will permit access and adequate reception to very small ground stations, such as those in use on the recent SKI-TREK trans-Arctic expedition.

## Keplerian Elements

These are supplied for us again by **Birger Lindholm** of Dalsbruk, Finland. Prior to taking up satellites, upon which he is a world renowned expert, Birger (Fig. 7) and his father used to be keen on short wave radio and DX television, for which they developed and built many antennas. He was captured by satellites from the moment he first heard OSCAR-5, and now closely follows all the AMSAT nets, the amateur satellites, the weather satellites

Satellite Name	OSCAR-9	OSCAR-10	OSCAR-11	MIR	OSCAR-12	OSCAR-13	RS10/11	SALJUT 7	OKEAN-1
Int. Designation	81-100B	83-058B	84-021B	86-017A	86-061B	88-051B	87-054A	82-033A	88-056A
Object No.	12888	14129	14781	16609	16909	19216	18129	13138	
Element Set	262	345	332	335	103		460	179	
Epoch Year	1988	1988	1988	1988	1988	1988	1988	1988	1988
Epoch Day	214.03512140	208.70664142	205.17630120	214.28363816	191.56475721	193.90000000	215.10465066	214.68963211	188.4144758
Inclination	97.6182	27.2519	98.0535	51.6188	50.0161	57.6540	82.9277	51.6102	82.5177
RAAN	248.3247	312.4328	267.0040	195.5433	271.5005	247.5380	113.8512	69.8797	95.7684
Eccentricity	0.0001935	0.6028873	0.0012361	0.0004591	0.0011213	0.6538919	0.0010779	0.0000403	0.00212
Arg of Perigee	171.6238	323.5201	280.8965	185.3874	193.4780	187.2210	212.0744	11.3201	275.4378
Mean Anomaly	188.5229	7.7041	79.0846	174.6662	166.5756	357.2170	147.9718	348.6965	84.4325
Mean Motion	15.33998942	2.05876723	14.62355959	15.74956346	12.44395077	2.09697960	13.71900618	15.33138656	14.73248494
Decay/Drag Fact.	8.624e-05	3.7e-07	3.14e-06	3.4313e-04	-2.5e-07	0	8.6e-07	2.616e-05	6.0e-06
Rev No./Orbit	37961	3851	23444	14093	8674	57	5564	35906	??
Nodal Period	93.932683	699.2007	98.530002	91.369155	115.653147	686.65	105.022824	93.863523	97.802968
Long. Increment	23.480147	175.3553	24.633197	23.231397	29.239320	172.19	26.381466	23.845246	24.580347
Beacon Freq (MHz)	21.002/14.001	145.810	145.826	143.625=voice	435.797	145.812	29.357/.403	19.953	137.4??=APT
	145.825	145.987	435.025	166.125=data	435.913	435.651	145.857/.903		
	435.025		2401.5	(a.m.)			29.407/.453		
	2401.0						145.907/.953		
Reference EQX	7 Aug 88	3 Aug 88	6 Aug 88	4 Aug 88	5 Aug 88		5 Aug 88	6 Aug 88	
Orbit No.	38053	3867	23647	14136	9004		5604	35973	
Time (HHMM.MM)	0052.09	1127.92	0135.41	0017.09	0138.77		0031.62	0212.91	
Longitude West	74.27	173.02	58.12	135.56	148.50		209.99	286.51	

Satellite Name	NOAA 9	NOAA 10	METEOR 3-2	METEOR 2-16	METEOR 2-17	COSMOS 1602	COSMOS 1766
Int. Designation	84-123A	86-073A	88-????	87-068A	88-005A	84-105A	86-055A
Object No.	15427	16969		18312	18820	15331	16881
Element Set	270	153		121	46	900	323
Epoch Year	1988	1988	1988	1988	1988	1988	1988
Epoch Day	207.77327930	208.40891463	208.65080731	211.18734539	211.83114260	213.13266339	220.71572946
Inclination	99.1038	98.6757	82.5430	82.5575	82.5417	82.5364	82.5264
RAAN	183.0984	238.5691	45.9236	115.4485	176.6847	274.3252	327.2978
Eccentricity	0.0015321	0.0014377	0.00148	0.0012856	0.0018432	0.0026794	0.0025116
Arg of Perigee	145.9864	110.9407	276.3084	27.5399	90.5168	50.6082	42.3559
Mean Anomaly	214.2291	249.3320	83.6276	332.6471	269.8125	309.7528	317.9498
Mean Motion	14.11613297	14.22601414	13.16761278	13.83353746	13.84031582	14.73919082	14.73789537
Decay/Drag Fact.	1.56e-06	1.85e-06	3.0e-06	1.8e-07	4.1e-07	5.43e-06	5.81e-06
Rev No./Orbit	18639	9635	57	4785	2509	20690	10910
Nodal Period	102.067277	101.280231	109.416728	104.153448	104.102454	97.758535	97.767106
Long. Increment	25.514768	25.320111	27.482842	26.166963	26.154339	24.569090	24.571315
Beacon Freq	137.620=APT	137.500=APT	??	137.400=APT	137.300=APT	137.330=APT	137.380
Reference EQX	6 Aug 88	3 Aug 88		4 Aug 88	2 Aug 88	6 Aug 88	10 Aug 88
Orbit No.	18798	9743		4866	2553	20777	10944
Time (HHMM.MM)	0102.22	0007.10		0106.20	0017.35	0055.99	0034.72
Longitude West	135.82	67.52		218.56	141.00	59.90	2.22

and a whole lot more. Birger also is a keen MIR follower, and he has been responsible for "discovering" many of the frequencies used for this space station and the associated Soyuz, Progress and attached modules by employing his AOR-2002 scanner and tracking passes calculated on his Spectrum 48K computer from the Keplerian elements he shares with us. He asks us to note that the NASA two line sets produced are not precision enough for exact scientific purposes, and that the orbital period and increment given is true for the epoch of the reference date given against them.

Our new ones this month are OKEAN-1, a Russian Oceanographic satellite giving good radar pictures around 137.4MHz, and METEOR-3/2, the latest Soviet Weathersat. These have been supplied by Les Currington.

### Eclipses

For the remainder of this year, the following amateur satellites will exper-

ience eclipse for the periods shown or over the mean anomaly periods given for the first days of the month.

Date	OSCAR-10	Uo-2	F0-12	RS-10/11
1988	Min.	MA	Min.	Min.
Nov. 1	39	019-034	31	29
Dec. 1	76	033-061	31	0

The start time for the above is 0000. Fuji-OSCAR-12 will be in full sunlight from November 30 until December 17 so a more reliable schedule is probable.

### Satellite News

In addition to the h.f. AMSAT nets earlier advertised, OSCAR-13 is now giving this service. The AMSAT International net and news broadcast, which is on 14.282MHz and 21.280MHz each Sunday at 1900UTC, with an information ex-

change commencing both one hour before the broadcast and following it also, is now being placed on OSCAR-13 by WA2LQO when the spacecraft is within range of North America. When the satellite schedule is Mode "B", it will come down on 145.957MHz, and when in Mode "L" on 435.888MHz, plus or minus a slight Doppler differential. The source is usually strong enough to overcome the worst of the spin modulation, fully readable and pleasantly devoid of the strong European QRM that often wipes out large parts of the h.f. news information content. The very latest Keplerian elements are always available, an AMSAT "whats on", plus coming events and happenings in the amateur, manned, research and commercial satellite programmes.

## The next three deadlines are: Oct 26, Nov 24 and Dec 22

## Propagation

Reports to Ron Ham  
Faraday, Greyfriars, Storrington, West Sussex R20 4HE

According to my readings about solar radio astronomy in the late 1960s, the active sun's output at metre-wavelengths varied with frequency. So, with this in mind, I added a second receiver to my solar telescope. This receiver, electrically similar to the first, observed the sun on a clear spot around 95MHz (you could then, hil). Its antenna, Fig. 1, was a 6-element Band II Yagi mounted on a wooden frame, 2m square. The frame, covered in wire

mesh, replaced the Yagi's own reflector and a metal pipe, slightly longer than the woodwork and secured to the rear of the frame, enabled the antenna to be centre-slung between two 50 mm diameter supports. These were standing on foot-plates buried in the ground. The horizontal pipe was attached each end to the uprights with strong mast clamps which allowed for periodic vertical adjustment.

By mid-1970, the second instrument

was running concurrently with the 136MHz system. The output of both receivers was fed to an Evershed and Vignoles twin-track chart recorder, Fig. 2, so that direct comparison between the solar activity on each frequency was easily made. The telescope and its work received a lot of publicity. On 5 November 1971, it was featured in the BBC television programme, *Tomorrow's World*. The presenter, James Burke, is seen talking to Practical Wireless, November 1988

## **TX - 3**

### **RTTY/CW/ASCII TRANSCEIVE**

#### **The high performance, low cost system**

Split-screen, type-ahead operation, receive screen unwrap, 24 large memories, clock, review store, callsign capture, RTTY auto CR/LF, CW software filtering and much more. Needs interface or T.U. BBC-B/Master and **CBM64** tape £20, disc £22. **SPECTRUM** tape £35, +3 disc £37 inc. adapter board (needs interface/TU also).

See reviews Dec 87 & Jan 88 issues.

For **VIC20** we have our RTTY/CW transceive program. Tape £20.

## **RX - 4**

### **RTTY/CW/SSTV/AMTOR RECEIVE**

This is still a best-selling program and it's easy to see why. Superb performance on 4 modes, switch modes at a keypress to catch all the action. Text and picture store with dump to screen, printer or tape/disc. An essential piece of software for trawling the bands. Needs interface. **BBC-B/Master, CBM64** tape £25, disc £27. **VIC20** tape £25. **SPECTRUM** tape £40, +3 disc £42 inc. adapter board (needs interface also). The **SPECTRUM** software-only version (input to EAR socket) is still available £25.

**TIF1 INTERFACE** Perfect for TX3 and RX4, it has 2-stage RTTY and CW filters and computer noise reduction for excellent reception. Transmit outputs for MIC, PTT and KEY. Kit £20 (assembled PCB + cables, connectors) or ready-made £40, boxed with all connections. Extra MIC leads for extra rigs £3 each. State rig(s).

**WORLD AND UK/EUROPE MAP LOCATOR** Maps, great circles, distances, bearings, contest scores. Lat/long, locators, NGR, hundreds of placenames. **BBC-B/Master, ELECTRON ONLY**. Tape £10.

**LOCATOR** Distances, bearings, contest scores. Lat/long, locators. **SPECTRUM, CBM64, VIC20** tape £7.

And for **BBC-B/Master, SPECTRUM, ELECTRON, CBM64, VIC20**.

**MORSE TUTOR** 1-40 wpm. Learn by ear, practise using random letters, figures, punctuation, words. 40 plain language texts supplied or type your own. With learning guide, tape £6.

**LOGBOOK** Date, band, mode, call and remarks. Instant callsearch. Log printout. Tape £8.

**RAE MATHS** Unlimited practice and testing for the exam calculations. Tape £9.

All **BBC** and **CBM64** programs are available on **DISC** at £2 extra.

**NEW!! PEP BOARD** Converts any RF power meter to read p.e.p. Assembled and tested PCB + mounting kit and instruction £12.


Prices include VAT and p&p, 1st Class inland, airmail overseas, normally by return. Eire, C.I., BFPO deduct 13%.

**technical software (P.W.)**  
Fron, Upper Llandwrog, Caernarfon LL54 7RF.  
Tel. 0286 881886

# **ARE**

## **COMMUNICATIONS**

**The new  
BEARCAT 200XLT**  
is an unbelievable scanner  
with incredible features!

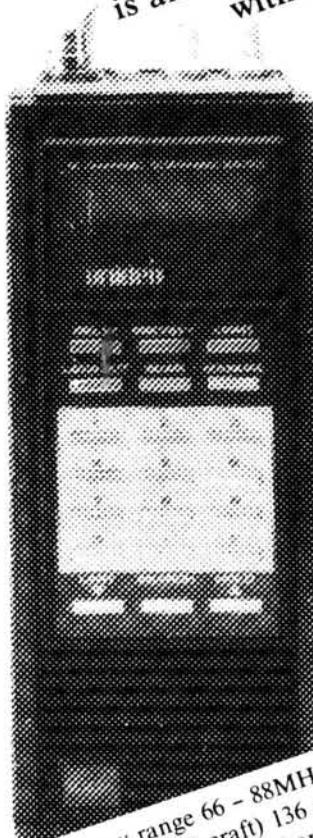

- 200 programmable memory channels
- 12 band coverage
- Automatic search
- Priority channel
- Selective scan delay
- Illuminated display
- Automatic lockout
- Track tuning
- Direct channel access

Frequency range 66 - 88MHz (lowband FM)  
118 - 136MHz (aircraft) 136 - 144MHz (military land mobile)  
144 - 146MHz (2m Ham band) 146 - 174MHz (High band)  
406 - 430 (UHF High band)  
430 - 440MHz (70cms Ham band) 440 - 512MHz (T band)  
806 - 956MHz (SHF Cellular telephone band)

In our opinion, the BEARCAT 200XLT is the most exciting product to be offered from the UNIDEN/BEARCAT organisation. Indeed, it makes most other handheld scanners available on the market, redundant.

Available ex-stock £229.00 carriage free,  
including ac charger, nicad pack and carrying case.

Opening hours Monday - Friday 9.30-5.30 Saturday by appointment.



A.R.E. Communications Limited, 6 Royal Parade,  
Hanger Lane, Ealing, London W5A 1ET, England

Fax: 01-991 2565

Tel: 01-997 4476

camera, Fig. 3, from a position between the two antennas with the microphone held above him out of shot.

Apart from the high number of daily bursts recorded throughout 1971, continuous noise storms occurred from January 7-14, 19-22 and 28 to February 3, April 9-17, May 6-12, June 28 to July 2, July 14-19 and 24-28, August 18-27, October 3-5, 23-25 and 30 to November 1, November 16-19 and December 4-9 (all dates inclusive). The following year, 1972, was unforgettable for me with major noise storms occurring from February 12-19, March 3-13, May 29 to June 2, June 18-21, August 1-9 and 11-14, September 8-11 and October 24 to November 1.

The aurora which manifested from 1300 to 1700 on June 18 and the h.f. blackout on November 1 were each associated with noise storms. The real "winner" for me was the massive solar storm during the first week of August. Let me explain; apart from a few small individual bursts, the sun was relatively quiet from July 7 to 31. But at 1146 on August 1, I recorded a hefty burst of noise which lasted for 8 minutes on both 95 and 136MHz, Fig. 4 and was strong enough to blot out the static crashes from a local thunder storm that was in progress at the time. Thunder storms are a pest during any solar observation because every crash of static draws an unwanted spike on the recording chart. On this occasion, it was scientifically valuable and became an excellent guide to the power of a solar burst. These static crashes were being generated only a few kilometres from my solar antennas but the radio waves that "crushed" them originated 150 million kilometres away and had travelled for 8.3 minutes before entering my receiver.

It was obvious that something big had started on the sun's surface and very soon astronomers were telling me about the appearance of a very large sunspot group which remained visible until the 9th. The daily increase in radio noise reached its peak on the 4th and then declined as the group crossed the centre of the sun's disc, Fig. 5. From sunrise on the 4th, the solar radio noise was so strong that my meteor counting system, working with a horizontal antenna on 70.31MHz, could not be used for several hours until the sun was much higher in the sky. When the telescope switched on at midday, both recording pens were banging the upper stops.

Like any other day the instrument switched off automatically at 1430 and, apart from a few updating phone calls, I closed my mind to radio astronomy and by 1500, I was helping fellow members of Storrington's Horticultural Society to prepare for their annual flower show on the 5th. Our venue was a large marquee on the



Fig. 1▲

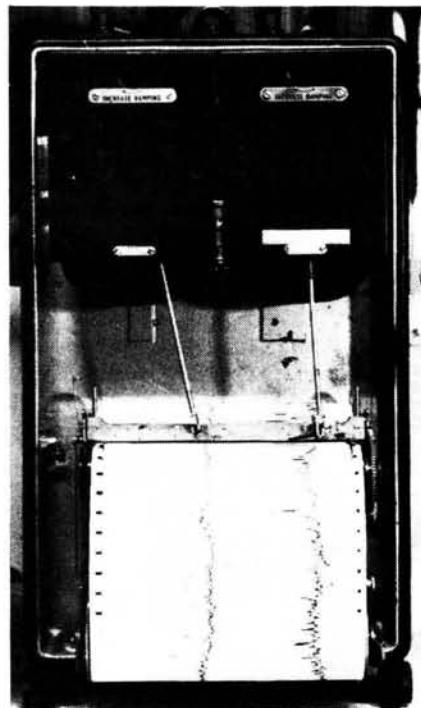


Fig. 2►

recreation ground and moving and installing tables and exhibits in the pouring rain was no joke. However, around 2200 the rain stopped leaving the sky clear. The seeing was extra good because there were no street lamps on, or near, the ground to hinder our view of the night sky, in fact, it was an ideal astronomical situation.

Around 2330, my attention was drawn to an arc of white light on the northern horizon about 20 degrees wide and 5 degrees high in the centre. From this arc came several searchlight type beams, a few degrees apart and reaching over my zenith. As these giant beams moved across the sky from west to east, their delicate shading changed from red to green to light blue. It is very rare for an aurora borealis to be seen in Sussex and I lapped up every second of it because this was the first time I had ever seen the northern lights. Nature's fantastic display lasted almost 3 hours and its climax came about 0200 when the bright stars of Ursa Major (The Plough) were shining through a pink auroral glow which, by that time, had become the backdrop behind the beams and periodic blotches of bright light.

I heard later that this aurora had an umbrella effect on v.h.f. radio signals, I was not at all surprised, but nothing would have dragged me home to find out. Had the sky remained overcast no one, apart from v.h.f. enthusiasts, would have known that an aurora was present. The sun was still active on the 5th and another aurora manifested at 1500 hours, but this time it was broad daylight and its existence was only known about because of the effect it has on the tone of terrestrial radio signals. Before the advent of radio, untold numbers

of aurorae must have gone by unrecorded because their light was hidden by overcast skies or because they manifested during the hours of daylight. More events next time but now back to the happenings in 1988.

### Solar

That giant sunspot group at the end of June will be a talking point for some time and **Cmdr Henry Hatfield** (Sevenoaks), using his 8in Meade Schmidt-Cassegrain telescope, photographed its position at 1014 on June 30. See Fig. 6.

"The monthly mean sunspot number for July was 112.6," wrote **Neil Clarke GOCAS** (Ferrybridge). The daily solar flux for July showing extremes of 133 and 193 s.f.u. can be seen in Neil's computer printout, Fig. 7. The mean average for July was 153 s.f.u.

**Patrick Moore** (Selsey) sent drawings showing the sunspots that he observed on July 26 and August 9, Figs. 8 and 9. In Bristol, **Ted Waring** counted 47, 57, 48 and 10 sunspots on July 29, August 2, 9 and 17 respectively.

**Dave Coggins** (Knutsford) heard bursts of solar noise at 24, 28 and 50MHz around 0655 on July 24 and another at 50MHz, while beaming west, at 1840 on August 4.

### Magnetic

"July was generally unsettled with stormy periods," said Neil Clarke. He explained, "on the 1st, the Ap index was 31 and then fell to 14 on the 5th before climbing again to 36 on the 11th. The next stormy day was the 16th with an Ap index of 42, but the most stormy period was the 21st, 22nd and 23rd with the Ap index at 65, 48 and 32 respectively."

In Saltash, **Karl Lewis** found the most unsettled conditions occurred on July 1, 11, 12, 21, 22, 26 and 27. At the other end of the UK in Strathclyde, **Doug Smillie GM4DJS** reports that his home-brew magnetometer, using Hall-effect devices, was unsettled on days 3, 4, 5, 7, 10, 11, 16, 30 and 31.

### Aurora

**Ron Livesey** (Edinburgh) is the auroral co-ordinator for the British Astronomical

Practical Wireless, November 1988


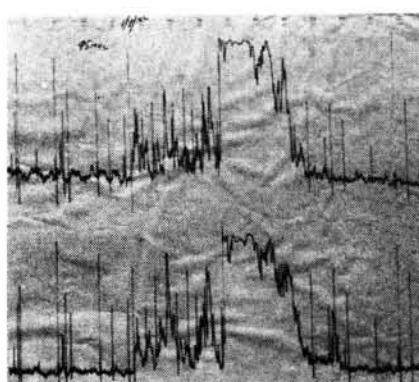



Fig. 4



Fig. 3

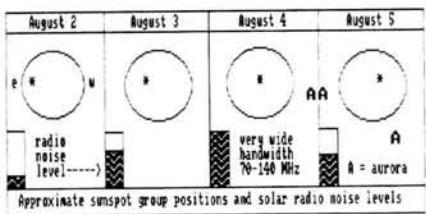

**Fig. 5**

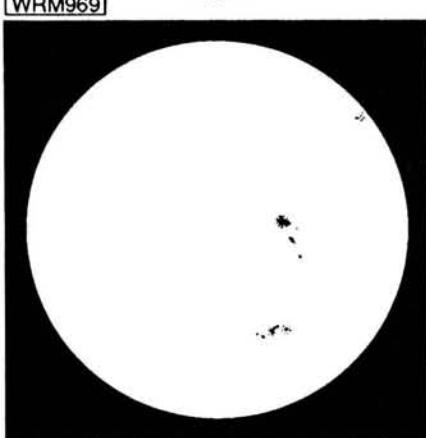


**Fig. 8**

Association. He received reports of "active fragmentary homogeneous arc" (11.6 degrees above the horizon) at 0626UTC on July 8, "quiet glow" (19°) at 0837 on the 12th and "pulsating striated rayed arc" (40.9°), "flaming striated rayed arc" (15.8°) and "active homogeneous glow" (87.0°) between 0638 and 0702 on the 15th, from Winnipeg.


Dave Coggins heard vision pulses with "ghostly" signals on Ch. R1 (49.75MHz) at 2140 and 2120 on August 7 and 8.

Sporadic-E


At 1815 on July 29 and at 1900 on the 31st, I counted at least 15 f.m. signals

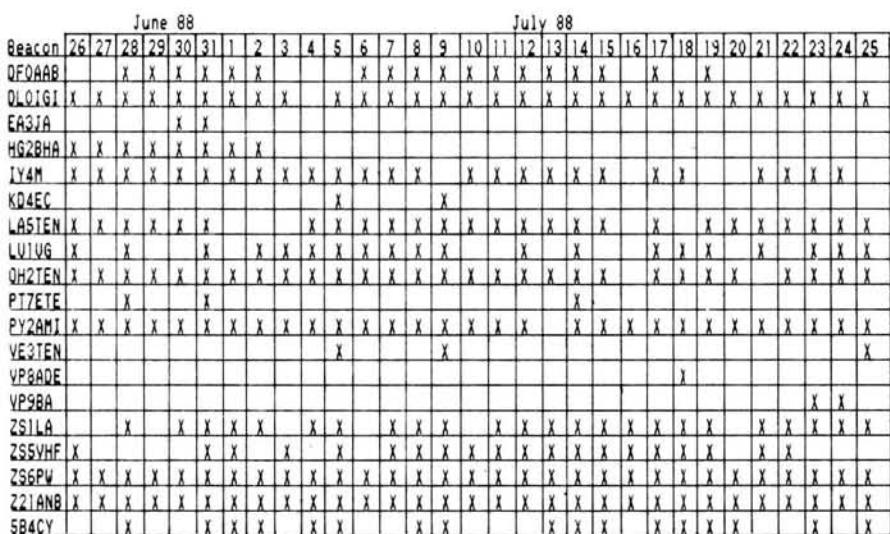


**Fig. 10**

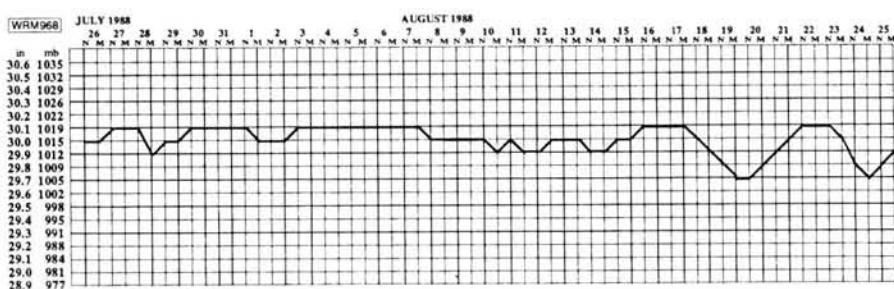


**Fig. 11**

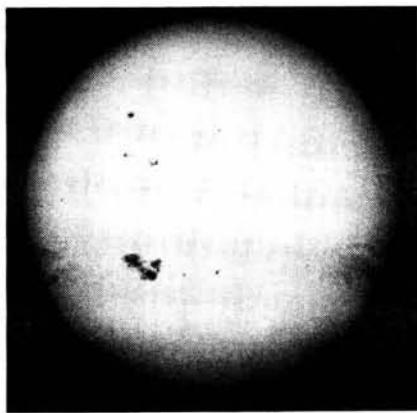

**Fig. 6**

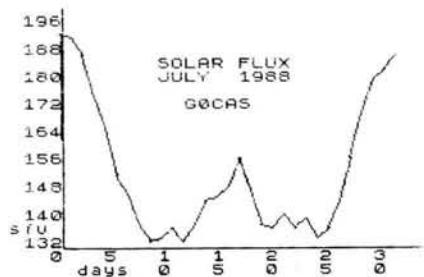

**Fig. 7**

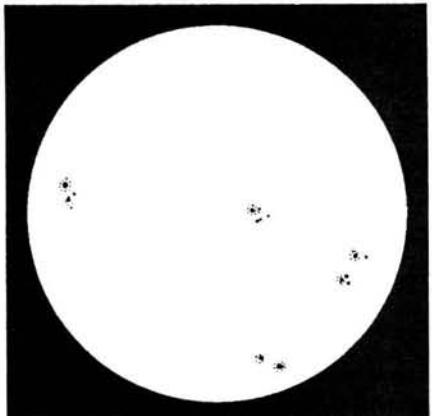

**Fig. 9**

## *The 50MHz Band*

I regret to say that **Norman Hyde G2AIH** (Epsom Downs) passed away in May. For many years Norman was a regular contributor to the 50MHz and the beacon sections of this column. In fact his interest in propagation ranged from 28 to 1296MHz and possibly more. We extend our deepest sympathy to his wife and family and to his many friends at this sad time.

"I have been granted an experimental licence by the Department of Communications to transmit on 2 spot frequencies of 35.810MHz and 41.75MHz to carry out

propagation tests on paths with a view to ascertain the m.u.f. between 30 and 50MHz, looking for 6m openings," wrote **Graham Rogers VK6RO** (Ferndale, WA). Graham is well known for his efforts on the 50 MHz band and for these experiments he has the callsign VK6R. He will be using f.m. and probably a 6-element log-periodic Yagi covering 30 to 54MHz. Graham plans to use liaison frequencies of 28.385 and 28.885MHz to arrange for stations to listen for his signals on the two spot frequencies. Good luck Graham and let us know the results.

## ***Propagation Beacons***

First my thanks to Dave Coggins, John Coulter (Winchester), Don Hodgkinson GOEZL (Hanworth), Ken Lander (Harlow), Greg Lovelock G3III (Shipston-on-Stour), Ted Owen (Maldon), Fred Pallant G3RNM (Storrington), Chris van den Berg (The Hague), Henry Hatfield and Ted Waring, for their 28MHz beacon logs.

In addition to the the beacons listed, Ken Lander received signals from EA1AW, W3VD and WA4DJS/BCN on August 3, 5 and 9, respectively. "WA4DJS says 'Fort Lauderdale, Florida, 20 watts, antenna 250ft loop,'" wrote John Coulter who logged it around 2025 on August 9 and 23.

On the 5th, Don Hodgkinson added KJ4X/BCN (28.206MHz), N4JHX/BCN (28.226MHz) and W3VD/BCN (28.295MHz) to his first-timers list. This was updated on the 7th and 13th when he logged 5Z4ERR (28.240MHz) and EA1AW (28.248MHz) respectively. Don had a 28MHz QSO with 5Z4RT, the beacon keeper, on the 12th and learnt that he does not operate 5Z4ERR when he is on the air himself.

Dave Coggins noted strong signals from ZS6PW and Z21ANB at 1100 on August 14. He also heard IK6BAK and PY2AMI, about S1, on 24MHz almost daily during the month prior to August 23. Ted Owen logged IK6BAK (24.91MHz) at 1230 on August 17 and Greg Lovelock heard KE2DI/B (28.286MHz) on August 9 and PY2AMI (24.90MHz) on July 30 and August 17/18.

My thanks to Ken Rawlings (Zimbabwe) for the gen that their beacon Z21ANB has been moved to a new site in Bulawayo. Following an overhaul this year, by the Zimbabwe Amateur Radio Society, its power has been increased from 8 to 20W. The present Beacon Keeper is Eric Cohen Z21BC/R, PO Box 1372, Bulawayo, Zimbabwe.

## 934MHz

The slightly rounded variation in atmospheric pressure for noon and midnight,

recorded by me from July 26 to August 25 can be seen in Fig. 11. Pressure changes are important to anyone who uses the v.h.f. or u.h.f. bands for static or mobile communications.

While in Dorset on August 14, 934MHz enthusiast Terry Wyatt UK-845 (Walton-on-Thames), using a mobile collinear antenna, worked UK-176 in Gurensey and heard a station in Cherbourg. He also made contacts with stations in Exeter (UK-796), Hengistbury Head (UK-862) and Ringwood (FW-31) and visitors UK-210 and UK-933 situated on the Purbeck Hills above Poole.

**Don't forget  
the next three  
deadlines are:  
Oct 26, Nov 24  
and Dec 22**

## Broadcast Round-up

Peter Shore

The Pacific region continues to be of potential interest to the short wave listener, with news that the New Zealand government is now re-evaluating the role of Radio New Zealand, that Cinderella of international broadcasting. It seems that the value of international short wave radio has been recognised. Radio New Zealand's antiquated 7.5kW transmitters could be replaced before too long by more powerful senders, beaming programmes in English and probably some Pacific vernacular languages, throughout Australasia. I reported some time ago that the BBC and the New Zealand authorities were exploring the possibility of setting up a joint transmitting facility in New Zealand, in order to improve the BBC's audibility in the Pacific region. Clearly an upgrading of the Radio New Zealand External Service would enable such an arrangement to be set up.

Meanwhile, talking of the BBC; on September 1 the BBC External Service disappeared, to be replaced by the BBC World Service. All the BBC's language services are now called BBC World Service instead of External. This was apparently to fit in with the public perception of the organisation who had never fully grasped the name External Service.

Relay agreements continue to feature in the media news, with reports that Austria and Canada are considering such a move. Under the agreement, Radio Austria International would broadcast around two hours a day via the Sackville site of Radio Canada International to North America. A similar amount of RCI programmes would be broadcast by ORF's Moosbrunn transmitters to the Middle East. Austria is reported to also be considering offers from other stations for relay facilities.

It is remarkable how these exchanges have burgeoned in the last couple of years. Ten years ago, it would have been almost unthinkable for broadcasters in the East and West to contemplate such arrangements. Where will it all end?

Radio Finland has re-introduced daily French language broadcasts to supplement the weekend broadcasts which started 18 months ago. Radio Finland ceased daily French language programmes in 1958. It is the English service that has suffered as a result of the increase in other language broadcasts. Since 1984, almost half of the station's English language service has been cut. With a massive investment in new transmitters for both h.f. and m.f. services, Radio Finland is clearly aiming to be one of the world's most audible small international broadcasters.

At the Commonwealth Foreign Ministers Conference in Toronto, Canada during August, the Canadian hosts tabled a proposal that a short wave service targeted on South Africa should be established.

The proposal for "Radio Free Africa" would entail a station being set up, similar in concept to Radio Free Europe established after World War Two by the Americans, to provide uncensored news to blacks and whites in South Africa. The news would be provided by Canadian journalists and perhaps Australians and British too. At present, no specific details on budgets, technical facilities and so forth have emerged, but it seems that the idea will come to fruition before too long.

In Sweden, the Community Radio station City 103 in Gothenburg has been told to stop relaying VoA Europe during the night when it does not broadcast its own programmes. The Swedish Community Radio Board says that continuous relays of foreign stations are not permitted under the community radio regulations in Sweden. City 103 takes two BBC World Service news bulletins during the day time, but these have not been cited as a breach of the regulations.

Radio Moscow broadcast its first programme in the Basque language directed towards Spain in August. Whilst claiming that this was the first ever programme in Basque on short wave, in fact Radio Exterior de Espana has been broadcasting in Basque since 1985.

### Europe

All times are UTC (=GMT).

Radio Austria International broadcasts from September 4 to Europe:

0400-2300 on 6.155MHz  
0700-1700 on 13.73MHz  
1300-1500 on 21.49MHz  
1700-2200 on 5.945MHz  
2000-2300 on 9.87MHz

The use of the new 13MHz channel was predicted in this column last month!

Radio Finland has been conducting single sideband tests in Finnish on 15.325MHz at 1000-1100. The new daily French language programmes can be heard:

0115-0130 on 15.40 & 11.755MHz  
1030-1045 on 15.325 & 15.115MHz  
1845-1900 on 15.185, 11.755, 9.53,  
6.12MHz & 963kHz.

Radio Finland is also heard at 1100 on 15.40 and 11.945MHz.

A new station opened in Malta during late August—Radio Voice of the Mediterranean. It is heard on 9.765MHz from 0600 in English with Arabic on the same frequency at 0700. Up to Moscow's first frequency change on September 4, the 0600 portion was subject to severe QRM from Moscow World Service. It is believed that this new Maltese station is controlled by Libyan interests.

Radio Netherlands introduced some frequency changes on September 25 and the

complete English transmission schedule became:

0400 on 9.895 & 7.21MHz  
0630 on 11.93 & 9.895MHz  
0730 on 9.715 & 9.63MHz  
0830 on 21.485, 17.575 (to SE Asia) &  
9.63MHz (New Zealand)  
1030 on 9.505 & 6.02MHz  
1130 on 21.48, 17.575, 15.56 (Mid  
East & Asia), 17.605, 9.715 &  
5.955MHz (Europe)  
1430 on 17.575, 15.56, 13.77, 11.735  
& 5.955MHz  
1630 on 15.57 & 6.02MHz  
1830 on 21.685, 17.605, 9.54 &  
6.02MHz  
2030 on 15.56, 11.74, 9.54 &  
9.895MHz  
0230 on 9.895, 9.59, 6.165 &  
6.02MHz  
0530 on 9.715 & 6.165MHz

Some programmes to be heard in Radio Netherlands' English Service during the coming weeks are:

Monday October 31: "The Research File" looking at the science behind weather forecasting. What is being done to improve the global weather prediction service.

Starting on Wednesday October 5, an eight-part documentary series produced in co-operation with the Australian Broadcasting Corporation will examine the Dutch influence on the development of Australia in bicentennial year.

Thursday means *Media Network* and on October 13, the programme will look at the many clandestine stations which operated during World War II. On October 27, the programme puts religious short wave broadcasters under the spotlight.

Radio Norway International has new frequencies, they are:

0600 on 15.165, 11.865 & 9.59MHz  
0700 on 21.73, 15.165 & 9.59MHz  
1000 on 21.705, 21.565 & 15.235MHz  
1100 on 21.705, 17.78 & 15.18MHz  
1200 on 25.73, 21.705, 15.325 &  
15.165MHz  
1300 on 21.705, 15.31, 9.59 &  
6.035MHz  
1400 on 21.7, 15.31, 15.28 &  
15.19MHz  
1500 on 17.84 & 15.31MHz  
1600 on 21.7, 15.31, 9.59 &  
1.314MHz  
1700 on 21.7, 15.31, & 9.655MHz  
1800 on 21.7, 15.31, 15.22 &  
9.655MHz  
1900 on 15.31, 15.22 & 9.59MHz  
2000 on 15.31, 9.59 & 6.01MHz  
2100 on 15.265 & 15.165MHz  
2200 on 15.18 & 11.85MHz  
2300 on 11.85 & 9.605MHz  
0000 on 11.85 & 9.62MHz  
0100 on 9.615MHz  
0200 on 9.56MHz

0300 on 9.65 & 7.215MHz

0400 on 11.76MHz

0500 on 15.165 & 11.735MHz

English is heard on Sundays at 1000, 1300, 1400, 1600, 1700, 1900, 2000, 2200, and 0000. Mondays at 0400, 0500 and on medium wave at 1600.

Turkey is heard between 1000 and 1500 on 11.96 and 9.46MHz.

## Africa

The Voice of Ethiopia has moved frequency for its programme at 1830. It is now heard with good reception on 9.662MHz (announced as 9.66MHz).

Malawi has been heard during the evenings from around 2130 on 3.381MHz.

Radio RSA has introduced a Danish language programme on Wednesdays only at 1600 until 1615 on 21.535MHz. English can be heard at:

1100-1200 on 21.59, 17.745 & 11.9MHz

1400-1600 on 21.59, 17.745 & 11.925MHz

1800-1900 on 21.535 & 17.765MHz

1900-2100 on 15.365, 15.32 & 7.295MHz.

## Middle East

Iraq's English Service at 2000 is now on 9.77 and 15.23MHz. The Qatar Broadcasting Service is heard from 0800 on 11.795MHz.

UAE Radio Dubai in English can be heard at:

0330 on 21.7, 17.89, 15.435 & 11.94MHz

0530 on 21.7, 17.83, 17.775 & 15.435MHz

1030 & 1330 on 21.605, 17.865, 15.435 & 11.955MHz  
1500 on 15.30, 11.955, 11.73 & 9.55MHz.

## Asia and The Pacific

English language programmes from Radio Bangladesh are now heard at 1230 on 17.71 and 15.25MHz.

Radio Exterior de Espana's relays via China are heard now at:

1000 on 9.62MHz

1100 on 11.915MHz

1200 on 9.62MHz

1300 on 11.915MHz

Radio Japan's General Service schedule for English is:

0100 on 17.845, 17.81, 15.195 & 5.96MHz (Canada)

0300 on 17.81, 15.195, 11.84 & 7.125 (Gabon to 0330)

0500 on 17.81, 15.235, 11.87, 11.84 & 9.505MHz

0700 on 21.695 (Gabon), 17.81, 15.235 & 11.955MHz

0900 on 17.81 & 11.84MHz

1100 on 11.815 & 6.12 (Canada)

1400 on 11.815, 11.78 & 9.695MHz

1500 on 21.70 (Gabon), 15.23, 11.815, 9.695 & 9.505MHz

1700 on 11.815, 11.705 & 9.505MHz

1900 on 11.705, 9.64 & 9.505MHz

2100 on 11.85, 11.815, 9.695 & 9.64MHz

2300 on 17.81, 15.23, 15.195, 11.815 & 11.80MHz (Gabon)

**Any reports for Broadcast Round-up should be sent to the PW offices**

Some frequency changes were due to come into effect in Papua New Guinea on September 5 with the installation of new 10kW transmitters from Japan. Provincial stations move as per:

Kimbe 2.435MHz

Kundiawa 2.490MHz

Mount Hagen 2.450MHz

Kieta 3.320MHz

Rabaul 3.380MHz

Lorengau 2.465MHz

## The Americas

RAE Buenos Aires current schedule for English programmes is:

0200 and 0400 on 11.71MHz

1700 and 2200 on 15.345MHz

Radio Havana Cuba is now broadcasting English as per:

0600-0800 on 11.76MHz (to America)

1700-1800 on 15.295MHz

2200-2300 on 7.15MHz

KNLS in Alaska has English at:

0800-0900 on 11.715MHz

1500-1700 on 9.75MHz

1800-1900 on 11.65MHz

Radio Mexico International has announced the following schedule for its programmes in English and Spanish:

1300-1700 on 11.77 & 5.985MHz

2000-2300 on 17.765MHz

2000-0500 on 15.43 & 9.705MHz

0300-0500 on 17.765MHz

Some low powered South American news: In Bolivia, Radio Centenario La Nueva in Santa Cruz is now back on 4.855MHz at 0000-0200. Radio Cortech, Sucre is heard on 4.935MHz. In Venezuela, Radio Rumbos in Caracas is on 9.66 and 4.97MHz during the evening period.

# ICOM

## IC-505, 50Mhz Transceiver

The IC-505 is a 6mtr BAND SSB, CW, FM (Optional) transceiver. It can be used as a portable or like other transceivers of this type as a base station unit. When used with an external 13.8v power supply the 505 gives 10 watts RF output, 3 watts or 0.5 watts on low power is available when using internal batteries. Other features include 5 memories with memory scan, program band scan, dual VFO's with split operation.

The easy-to-read LCD readout includes frequency, memory scan and call modes. Full metering of battery condition signal strength and power output is provided. When fitted with the optional EX248 FM unit the IC-505 offers 50MHz operation at an affordable price.

**Icom (UK) Ltd**

Unit 8/9 Sea Street Industrial Estate, Herne Bay, Kent CT6 8LD. Telephone: (0227) 369464.

**Open: 9-5.30, Lunch 1-2pm. Mondays to Saturdays.**

# USE THIS SPACE

# SMALL ADS

The prepaid rate for classified advertisements is 40 pence per word (minimum 12 words), box number 60p extra. Semi-display setting £13.24 per single column centimetre (minimum 2.5 cm). Please add 15% VAT to total. All cheques, postal orders etc., to be made payable to Practical Wireless. Treasury notes should always be sent registered post. Advertisements, together with remittance should be sent to the Classified Advertisement Dept., Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP. Telephone (0202) 678558.

*Whilst prices of goods shown in advertisements are correct at the time of closing for press, readers are advised to check with the advertiser both prices and availability of goods before ordering from non-current issues of the magazine.*

## Receivers and Components

**SCANNER OWNERS.** For those of you who wish to hear more, we offer extensive frequency listings and many scanner modifications. For full details send a large S.A.E. to S.S.C. PO Box 71, Bournemouth, Dorset BH9 1DL.

### QUARTZ CRYSTALS and FILTERS

Large numbers of standard frequencies in stock for amateur, CB, professional and industrial applications. Stock crystals £5.00 each (inc. VAT and UK post). Any frequency or type made-to-order from £5.00. Phone or SAE for lists.

**GOLLEDGE ELECTRONICS**  
Merrifield, Somerset, TA16 5NS.  
Tel: (0460) 73718.

**AIR BAND RADIO** - Steepleton FM/AIR/MW £9.95. Also B.F.O. kit, resolves Single-Side-Band on almost any radio. £9.95. Corrigan Radiowatch, Building 109, Prestwick Airport KA9 2RT.

## Educational

**COURSE FOR CITY & GUILDS**, Radio Amateurs Examination. Pass this important examination and obtain your licence, with an RRC Home Study Course. For details of this and other courses (GCSE, GCSE, Career and professional examinations, etc.) write or phone: THE RAPID RESULTS COLLEGE, Dept. JX26, Tuition House, London SW19 4DS. Tel. 01-947 7272 (9am-5pm) or use our 24hr Recordacall Service: 01-946 1102 quoting Dept. JX26.

## For Sale

**SPECIALIST VHF/HF MONITORS.** Hand compact 53-176MHz & 200Ch. 10/11m. All signals, squelch & vfo functions. Quality production, European origin. Only £29.50 inc. p&p. TAYLOR D/T. 8 Emmerson St., Crook, Co. Durham, UK (see details).

**ICOM 04AT** £200. Trio R600 general coverage receiver £150 o.n.o. W. BRICE, 01-648 9837.

**R.C.A. AR88D** complete with handbook and numerous spares. £80.00 buyer collects. D.J. TAPSELL, Reading 475103.

## Software

**COMMODORE COMPUTERS** (+4, C16, 64, 128). "MICROCOM" cw/rty tx/rx with superb morse tutor. "TURBO LOG" ultimate high speed station log. "MICROCOM INTERFACE" ready built. S.A.E. to: Moray Micro Computing, Enzie Slackhead, Buckie, Moray, AB5 2BR. Tel. 0542 7384.

### FAX FOR YOUR SPECTRUM

RECEIVE FAX PICTURES ON YOUR SPECTRUM. WEATHER MAPS ETC.

REAL TIME CLOCK. CONTRAST CONTROL. WIDTH CONTROL. SCREEN STORE ETC.

SAVE RECEIVED DATA TO TAPE OR DUMP TO YOUR PRINTER.

THE PROGRAMME NEEDS AN EXTERNAL DRUM SPEED GENERATOR.

PROGRAMME ONLY £9.00  
DRUM SPEED GENERATOR £24.00

S.A.E. for details of all our products

**J.W.P. ELECTRONICS LTD.**   
Unit 45, Meadowhill Est., Dixon Street,  
Kidderminster DY10 1WW. Tel: (0562) 753893

## Service Sheets

### ACCESS

### TECHNICAL INFO SERVICES (PW)

**MASTERCARD**  
**EUROCARD**

76 Church St., Larkhall, Lanarkshire ML9 1HE

Callers during business hours to 2 John Street, Larkhall ML9 2ET

Phone 0698 884585 Mon-Fri 9-5, 0698 883334 any other time FOR FAST QUOTES

IMMEDIATE DESPATCH OF ALL Phone Orders by ACCESS, etc. or to Listed Customers

WORLD'S LARGEST COLLECTION OF SERVICE MANUALS... from £3.50 to £50... Most unobtainable elsewhere

Every issued FULL SIZE SERVICE SHEET in stock; CTV's or Combinations £3.50; Singles £2.50; Plus LSAsE

LSA for any Quotation, plus FREE large Catalogue, STREE Review, Pricelists, etc.

Send now for

FULL details of our Famous Complete Integrated Repair Systems for TVs, Videos & Domestic Equipment

These systems contain all the circuits & data needed to cover repairs and servicing for anyone in business or wishing to start up their own business. All the Diagrams, Repair, Service & Technical Data needed. At a fraction of the normal cost of buying such data.

Terms are also available.

For £3... Comprehensive Service Manuals & Sheets Catalogues PLUS 1988 Chassis Guide & £4 Vouchers

Spectrum Repair & Service Guide	£5.00	Video Recorders, Service Guide 3rd Ed.	£20.00
Domestic Equipment Repair & Servicing	£16.95	Servicing Radio, HiFi, TV Equipment	£9.95
Audio & HiFi Engineers Pocketbook	£9.95	Practical Radio, Repair & Service Course	£9.95

\*\*\*\*\*  
**WORKSHOP SERVICE MANUALS**  
 \*\*\*\*\*  
 Any Colour/Mono TV, Amateur Radio, Military Surplus,  
 Music System, Vintage Valve Wireless etc etc.  
 £5.00 plus LSAE  
 Any Video Recorder. £15.00 plus LSAE  
 FREE Catalogue  
 Unique Repair and Data Guides for LSAE  
 MAURITRON ELECTRONICS (PW)  
 8 Cherry Tree Road, Chinor, Oxon, OX9 4QY.  
 \*\*\*\*\*

## Situations Vacant



**A.R.E. COMMUNICATIONS  
URGENTLY REQUIRE**

### A RADIO ENGINEER

Preferably experienced in amateur/commercial products, including microprocessor based equipment.

An excellent salary together with a secure future awaits the correct applicant.

Telephone or write for an interview to  
Martin Lynch (Sales Director)

A.R.E. Communications Ltd  
6 Royal Parade, Halesowen, West Midlands  
B6 5LT  
Tel: 0121 475 4718

## Kits

### F.J.P. KITS & COMPONENTS

Kit Manufacturers - Amateur Radio Products PROPRIETOR F. POWELL G6 RGH  
63, Princess Street, Chadderton, Cannock, Staffs WS11 2JT  
Telephone (05435) 6487

Amateur gear this month Kits at Sensible Prices No vat on our Kits

Transverters 1.5w Tx output With improved receive. All one piece Kit with 2mtr lead. 10w 2mtr IF

For 4mre 2mtr If specailly £45.00 inc P/P

15 watt multimode RF linear for above 1.5w in 20w out (0.5-1.5w in) £29.00 inc P/P

R.F. vox for above 0.2-10w with PTT facility to switch other devices £9.50 inc P/P

P.W. Mast Head Preamp for 2.4 & metres PTT switched 12v operation low noise Boxed £16.00 inc P/P

P.W. RF voltmeter we built this one and ok for setting up oscillators etc. £22.00 inc P/P

P.W. zener diode tester with box Aug 88 £12.50 inc P/P

P.W. audio vox kit for the HF/VHF bands lazy operator March 84 £18.00 inc P/P

P.W. Orwell med wave DV Listener varcap version inc Aluminium Box £5.00 inc P/P

P.W. Westbury 450W plus Wobulator for IF alignment set up stall filters etc £16.00 inc P/P

P.W. Feil Dipper for HF/VHF. We now stock the formers for this one. £16.00 inc P/P

F.J.P. 2.5 watt RF amp for Mico or Mx 6 & 4m reg. 0.2w in <10 out plus Kit only £6.50 inc P/P

All we have are only a small selection of P.W. F.J.P. kits. We stock components, test gear cable R.F. A.F. rotators (cable) 18p stamp for lists please write clearly. Terms Cash, PO. Box 650, Chadderton, Lancs. Visa to 1.5P. Over 100 items in stock. All Kits include Box. Wire and no more to pay for postage and packing. AIR TRUSTED KITS. Kits Built to Order. g. P.W. Mean 0.5w C75. 1.5w D.P. RF Transistor £80. With Lin £110-£115.

**MICROTRANSMITTER, VHF/FM**, tunable 70-146MHz, complete kit with microphone £5, built £9.50. Telephone to recorder adaptor, built £5.95. Automatic version £14.95 complete. SAE list. A.C. ELECTRONICS, 99 Greenheath, Huddersfield, Staffs.

**RECEIVER PRE-AMP.** 15dB gain, low noise, 10m and 2m versions, simply adjusted for any band. Kit £7.99. SAE list. A.C. ELECTRONICS, 99 Greenheath, Huddersfield, Staffs.

**CONVERT MULTICHANNEL C.B.'S** to amateur band simply and cheaply. Instructions only £2.50. SAE list. A.C. ELECTRONICS, 99 Greenheath, Huddersfield, Staffs.

## ORDER FORM PLEASE WRITE IN BLOCK CAPITALS

Please insert the advertisement below in the next available issue of Practical Wireless for insertions. Enclose Cheque/P.O. for £..... CAT. heading .....


NAME .....

ADDRESS .....

### PRACTICAL WIRELESS

Classified Advertisement Department,  
Enefco House, The Quay, Poole,  
Dorset BH15 1PP. Telephone (0202) 678558

Rate 40p per word, minimum 12 words.

Box No. 60p extra.

PLEASE ADD 15% VAT TO TOTAL

Company registered in England.

Registered No. 1980539.

Registered Office: Towngate House,

2 Parkstone Road, Poole, Dorset, BH15 2PJ.

11/88

## Valves

### HAVING DIFFICULTY OBTAINING AN OBSOLETE VALVE/TRANSISTOR/I.C.?

We try harder to locate rare types! Delivery either ex stock (1-2) days or from our overseas sources (5-8 days). Magnetrons, Klystrons, C.R.T., trans-wave tubes also stocked.

#### WE ALSO STOCK ALL POPULAR TYPES. USUALLY THE LOWEST PRICES ANYWHERE

(compare our prices listed below!) we'll nearly always beat any written quote. Large discounts for wholesale quantities - phone/fax/telex for an immediate quote. Free advice re equivalents etc. (we've specialised in valves and transistors since 1982). New boxed guaranteed valves. Good quality brands (Mul. Bri. SIC etc.)

Please add 15% VAT to all prices and £1.15 p/p per order. Telephone your order quoting VISA, BARCLAYCARD (not ACCESS - sorry), or send cheque for prompt despatch by 1st Class Post. All parcels insured (at our expense) against damage in transit.

2C39A	29.00	12AT7	0.80	C1148	POA	ECC85,Mul	1.00	M8137,Mul	7.00
2C39BA	38.00	12AU7,Mul	1.75	C1166	POA	ECC91	1.80	M8162,Mul	5.00
3B28	10.00	12AU7	0.80	CV types	POA	EFC880	1.15	O42,Mul	2.30
4-125A	55.00	12AX7,Mul	2.00	CX1140	POA	ECL182	0.55	O42	1.40
4-250A	74.00	12AX7	0.80	DET22	35.00	ECL186	0.95	O82,Mul	2.40
4CX250B Bimac	58.00	12BH7	3.45	DET24	25.00	EFC86,Mul	4.25	OB2	1.40
5B-254M ITT	14.00	12BV7A	3.45	DET28	8.00	EFC86	2.10	PCL82	0.60
5B-255M ITT	19.00	12E1	17.00	E551,Mul	40.00	EFP91	1.40	PCL805	0.80
SU4GB	4.30	13E1	130.00	E88C,C,Mul	4.50	EFP92	1.85	PL509/19	4.45
SZ4G	2.30	19H4	29.00	E88C,C	3.00	EFP95	0.80	QQV02-6	18.00
6AK5W	1.95	19H5	29.00	E180F,Mul	5.75	EL334	2.80	QQV03-10	4.90
6AU6	0.78	85A2	1.20	E180CC	9.00	EL338	6.50	QQV03-20A EEF	26.00
6AL5	0.50	95A1	5.75	E182CC,Mul	7.50	EL411	2.70	QQV03-20A	23.00
6BA6	1.00	150B3	4.50	E188CC	7.00	EL434	0.95	QQV06-40A,Mul	38.00
6B16	1.90	572B (USA)	64.00	E810F,MMul	23.00	EL360	6.50	QQV06-40A	24.00
6B16	1.40	807	2.80	EAC91	1.70	FY84	4.80	QQZ03-20A,Mul	38.00
6BW6	5.30	813 Phillips	34.00	EB91	0.50	GZ34	2.40	S11E12 STC	34.00
6CH6 Brimar	6.75	813	24.00	EC90	1.40	GZ37,Mul	3.50	VLS631	10.00
6FT7 STC	2.60	4212H STC	200.00	EC91	3.80	Holder for Valves	U19	9.00	
6F33 STC	9.00	6080	6.00	ECC81,Mul	1.75	& I.C.	UH42	2.00	
6L6GT	2.20	6146B G.E.	10.75	EC81	0.80	KTC7581A RCA	9.00		
6V6G	1.20	7360 RCA	14.75	EC82,Mul	1.75	KTC66550A	10.00	U41	7.20
6X4	1.30	A2134	14.00	ECC82	0.80	KTC886550	11.00	UY41,Mul	5.00
11F3	48.00	A2293	5.00	ECC83,Mul	2.00	M8099	4.50	Z759 GEC	16.00
12A17,Mul	1.75	A2426	29.80	ECC83	0.93	M8136,Mul	6.00	Z803U	18.00

Prices correct 1.9.88

Phone/fax/telex for immediate quote on any type not listed - ask for Martin Billington.

Phone, fax or telex for our valve catalogue or a quote on your requirements.

39 Highlands Road, Horsham, Sussex RH13 5LS, England.

(Callers welcome but by appointment only).

Phone 0403 210729 Fax 0403 40214 Telex 87271.

Office hours Mon - Fri 9 a.m. - 6.30 p.m.

(Answerphone, telex and fax left on overnight and weekends).



BILLINGTON VALVES

GOOD QUALITY - LOW PRICE - RARITIES A SPECIALTY

## INDEX TO ADVERTISERS

Aerial Techniques	65
AH Supplies	44
Aircastle Products	10
Amateur Radio Communications	43
Antex	41
A.R.E. Communications Ltd.	2,369.74
BCD	10
BICC Vero	31
Billington Valves	75
Birkett J	12
Bredhurst	65
Cambridge Kits	65
Cap. Co	61
Colomor	12
CPL Electronics	43
Datong	41
Dressler Communications Ltd.	10
Electronic Equipment Co (London) Ltd	75
Elliott Electronics	44
FJP Kits	74
G4TNY	44
Garex	12
Golledge Electronics	74
Howes, C M Communications	56
Icom (UK) Ltd	4,573, COVER 3
ICS Inter{text}	41
J & M Amateur Radio	10
J & P Electronics Ltd.	74
Kent, R. A. Ltd.	61
Lee Electronics Ltd	55
Leicester Amateur Radio Show	13.52
Maplin	Cover 4
Mauritron	74
Merlin Systems	51
M. H. Electronics Ltd.	75
Navico Ltd	21
Nevada Communications	51
North Wales Rally	37
Photo Acoustics Ltd	35
Radio Electronics Fair	10
Radio Shack Ltd	76
Randam Electronics	41
RAS Nottingham	43
Raycom Communications Systems	27
R. N. Electronics Ltd.	56
RST Valve	61
Rylands F G	75
Scientific Wire Company	75
SEM	65
Short Wave Magazine	38
Siskin Electronics	43
South Midlands Communications	Cover 2,6,7,37
Spectrum Communications	51
Stephens James	12
Technical Info Services	74
Technical Software	69
Ward Reg & Co Ltd	44
Waters & Stanton	8.9

## Consultant Services

TELEPHONIC AERIAL CONSULTANT Telephone G2DYM Ex-BBC. Aerial Engineer, fees £10, 10 minutes, afterwards, £1 per minute. Access/Visa. 03986 215.

## Wanted

WANTED PYE PTC 114/115 VHF radio telephone circa 1950 reward. D. BARKER, 255 Orphanage Road, Erdington, Birmingham B24 0BD. 021 382 6307.

## Miscellaneous

**GVF LOOP ANTENNAS WITH ATU FOR HIGH FREQUENCY HAM BAND TRANSMISSION (SWR One to One 40, 15 and 10 and One Point Five to One 80 and 20) AND SWL'S. LONG AND MEDIUM WAVE BANDS FOR BCL's. Loops 21 inches square or triangle. DIY projects. No special skills required. Circuits, Parts Lists with sources of supply and full assembly data. **HIGH FREQUENCY LOOP 80** to 10 Metres. **E5. LONG AND MEDIUM WAVE LOOP** for BCL's. **E3. LONG WAVE MEDIUM WAVE SHORT WAVE LOOP** 1500 to 10 Metres FOR BCL AND SWL. **E2. SHORT WAVE ATU FOR EITHER LOOP OR LONG WIRE** £4. FIELD STRENGTH METER £2. D.I.Y. pre amp LW, MW and S.W. £2. NEW MW LOOP with pre amp ATU £3. SAE for details. Photo Copy HRO Manual £4. F. G. Rylands, 39 Parkside Avenue, Millbrook, Southampton SO1 9AF Tel. (0703) 775064**

HEATHKIT U.K. Spares and Service Centre. CEDAR ELECTRONICS, Unit 12, Station Drive, Bredon, Tewkesbury, Glos. Tel. (0684) 73127.

## MORSE CODE PREPARATION

Cassette A: 1-12 wpm for amateur

Cassette B: 12-25 wpm for professional examination preparation.

Each cassette is type C90.

Price of each cassette (including booklets) £4.95

Morse key with separate battery (PP3) — driven solid-state oscillator and sound source produces clear tone for sending practice. Price of key with electronic unit £8.95.

Price includes postage etc. Europe only.

## MH ELECTRONICS (Dept PW)

12 Longshore Way, Milton, Portsmouth PO4 8LS

## THE SCIENTIFIC WIRE COMPANY

811 Forest Road, London E17. Telephone 01-531 1568

## ENAMELED COPPER WIRE

SWG	1 lb	8 oz	4 oz	2 oz
8 to 34	3.63	2.09	1.10	0.88
35 to 39	3.82	2.31	1.27	0.93
40 to 43	6.00	3.20	2.25	1.61
44 to 47	8.67	5.80	3.49	2.75
48	15.96	9.58	6.38	3.69

## SILVER PLATED COPPER WIRE

14 to 30	10.10	5.20	2.93	1.97
Fluxcore	3.97	2.41	1.39	0.94

Post free, please add VAT (@ 15%. Orders under £3.00 add 50p. SAE for list of copper and resistance wire. Dealer enquiries welcome.

WAVEGUIDE, FLANGES & DISHES. All standard sizes & alloys (new material only) from stock. Special sizes to order. Call: EARTH STATION 01-228 7876. 22 Howie Street, London SW11 4AR.

Racal MA 211 Aerial Tuning Unit £145.00 ea.

Racal MS 61 Line Prog. Unit £35.00 ea.

Vernier Dial 0.100 25mm with Brake £3.75 ea.

8R 50W. WW. V/contol 1/4" D.shft. £1.75 ea.

**HIGH VOLTAGE ELECTROLYTICS**

1/360V A.C. Wkg 35p. 15/160V D.C. Wkg 60p.

2/360V A.C. Wkg 40p. 47/160V D.C. Wkg £1.50

4.5/280V A.C. Wkg 40p. 4/440V D.C. Wkg £1.25

6/360V A.C. Wkg 75p.

**CO-AXIAL CABLES**

LDF 4/50A Heliax 1/2" £3.75 per mtr.

LDF 4/50B Heliax 2/2" £4.25 per mtr.

RG 218 Co-Axial £2.50 per mtr.

RG 215 U Co-Axial £1.75 per mtr.

RG 215 B/U Co-Axial £1.65 per mtr.

RG 178 B/U Co-Axial £0.35 per mtr.

CA 190 Co-Axial £0.60 per mtr.

## ALL PRICES INCLUSIVE VAT + P&P

## ELECTRONIC EQUIPMENT CO (LONDON) LTD.

UNIT 150 LAKESIDE PARK, NEPTUNE WAY, ROCHESTER, KENT.

Tel: Medway (0634) 290628 Fax: 290643, Allow 10 days delivery

## TO FILL THIS SPACE

## PHONE KATHY ON

**0202 678558**

# YOUR LOCAL DEALERS

**TO FILL THIS  
SPACE  
CALL:  
0202 676033**

## IRELAND

### Radcom Electronics

Icom, Yaesu and most Amateur Radio Accessories ex stock.

#### NEW PREMISES:-

Unit 4, Albert Quay,  
Cork City.

Tel: 021-632725 and

088 553947

(Mon-Fri 9-5 and Sat 9-3.45)

## LONDON

### Henry's

27MHz/934MHz Rigs & accessories in stock.

Lists - S.A.E. (A4) - 26p

Full catalogue (TG/P) -

large S.A.E. £1.00

404 Edgware Road,

London W2 1ED

Tel: 01-724 0323

(Open 6 days a week)

## ESSEX

### Selectronic

The UK's leading suppliers of 934MHz personal radio equipment

203 High Street, Canvey

Island, Essex

Tel: 0268 691481

(Open Mon-Sat 9-5.30)

Amateur radio equipment also in stock

## HERNE BAY



### ICOM (UK) LIMITED

The Official Icom Importer

Unit 8, Sea Street

Herne Bay, Kent CT6 8LD

Tel: 0227 369464

Fax: 0227 360 155  
Open Mon-Sat 9-5.30,  
(Lunch 1-2.00 pm)

## SOUTHAMPTON

### South Midlands Communications

Official Yaesu Importer

S.M. House, School Close,  
Chandlers Ford Industrial Estate,  
Eastleigh Hants SO5 3BY.  
Tel: 0703 255111

## PORTSMOUTH

### Nevada Communications

Importers of the Nevada range of 934MHz equipment

189, London Road,  
North End, Portsmouth,  
Hants, PO2 9AE  
Tel: 0705 662145

## DEVON

### Reg. Ward & Co. Ltd.

The South-West's largest amateur radio stockist. Approved dealer for Kenwood, Yaesu and Icom

1 Western Parade,  
West Street, Axminster,  
Devon, EX13 5NY  
Tel: 0297 34918

(Closed 1:00-2:00 and all day Monday)

## BUCKINGHAMSHIRE

### Photo-Acoustics Ltd.

Approved Kenwood, Yaesu and Icom dealer (part exchange always welcome)

58 High Street, Newport Pagnell,  
Buckinghamshire MK16 8AQ

Tel: 0908 610625

(Tues-Fri 9:30-5:30, Sat 9:30-4:30)  
Closed Mondays

## SOUTH WALES

### ELECTRO DISPOSALS

2000 sq ft of surplus equipment and components

UNIT 31, LONLAS WORKSHOPS  
SKEWEN, NEATH.  
Tel: 0792 818451

## LONDON

### AMCOMM OF LONDON

Approved dealer for Yaesu and Icom

373 Uxbridge Road,  
London W3 9RN  
Tel: 01-992 5765

(Mail order a speciality)

## YORKSHIRE



### Alan Hooker Electronics

42, Nethernall Road, Doncaster.

Tel: 0302 25690  
Open Mon-Fri 10-5pm  
Closed Thursdays

## MERSEYSIDE

### MGR SERVICES

Wirral based communications  
ICOM - YAESU - M MODULES - HOWES

- CIRKIT - WOOD & DOUGLAS -  
PART-EX - AERIALS - PMR - MARINE -  
MET ANTENNAS - ALINCO -

HEATHERLITE - SPECTRUM COMMS  
48, Shrewsbury Road,  
Oxton, Birkenhead, L43 2HZ.

Tel: 051 653 3437

(Callers by appointment 9 am-9 pm, Mon-Sat)

## SOUTH WALES

### A.C.S. SYSTEMS

MAIL ORDER RETAIL  
PACKET RADIO, ST-PC, AMIGA COMPUTERS  
AMATEUR SOFTWARE FOR MOST COMPUTERS  
SATELLITE TELEVISION SYSTEMS

#### ICS DEALER FOR DATA COMMUNICATIONS

19, CILHAUL TERRACE, MOUNTAIN ASH, MID GLAMORGAN  
SOUTH WALES, CF45 3ND. TEL 0443 476040  
CALLERS BY APPOINTMENT 9am-9pm Mon-Sat  
SAE LIST

## CHESTERS

### FLIGHTDECK

THE AIRBAND SHOP  
Specialists in Airband and Shortwave receivers.

Official agents for Sony, Signal, AOR, Revco, Lowe and Kenwood (rec's only)

FAIRBOTHAM & CO LTD.  
58-62 Lower Hill Gate,  
Stockport, SK1 3AM.

Tel: 061 480 8080

(closed 1:00-2:15 & all day Thursdays)

## WEST SUSSEX

### BREDHURST ELECTRONICS LTD.

High St., Handcross, West Sussex  
Tel: (0444) 400786

Situated at the Southern end of M23. Easy access to M26 and South London.

Open Mon-Fri 9am-5pm  
except Wed 9am-12:30pm  
Sat 10am-4pm



# SUPER DEALS ON SCANNERS

THE FINEST EVER SCANNER  
PRO 2004



**£329.95 WITH A LOT OF EXTRAS!**

THE NEW PRO 34  
200 CHANNEL  
HAND-HELD SCANNER  
INCLUDES 806-960MHz

**£249.95**

WITH A LOT OF EXTRAS

AMATEUR COMMERCIAL RECEIVERS TRANSCEIVERS ANTENNAS COMPUTERS PRINTERS FAX & PAGERS

# SUPER DEALS ON EVERYTHING IN COMMUNICATIONS

### RADIO SHACK LTD

(Just around the corner from West Hampstead Station on the Jubilee Line)

Giro Account No. 588 7151 Fax: 01-328 5066 Telephone: 01-624 7174



188 BROADHURST GARDENS,  
LONDON NW6 3AY



Count on us!

# IC-735 Compact HF.



As predicted the Icom IC-735 has rapidly gained the reputation it deserves. This compact transceiver is ideal for mobile, portable or base station operation. It has a general coverage receiver from 0.1Mhz to 30Mhz with superb sensitivity in all modes, SSB, CW, AM and FM. Spectacular specifications are also achieved on RF Intercept, Dynamic Range, Reciprocal Mixing and I.F. Blocking. As HF conditions improve over the next few years it is equipment like the IC-735 that will provide clear reception even under the worst pile-ups.

The IC-735 has a built-in receiver attenuator, preamp, noise blanker and RIT passband tuning and a sharp IF notch filter ensures clear reception. The twin VFO's and 12 memories can store mode and frequency.

Scanning functions include program scan, memory scan and frequency scan. The HM12 scanning microphone is supplied.

RF output is approximately 100 watts and can be continuously adjusted down to 10 watts. The IC-735 is one of the first HF transceivers to use a liquid crystal display, which is easily visible under difficult conditions. Controls that require rare adjustment are situated behind the front cover but are immediately accessible.

Options include the PS-55 AC Power Supply, AT150 Automatic Antenna Tuner, AH2a Automatic Antenna Tuner, SM6 and SM8 Desk Mics, SP7 External Loudspeaker. Why not find out more about the IC-735 contact your local ICOM dealer or contact ICOM (UK) LIMITED.

**Icom (UK) Ltd.**

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

**Helpline:** Telephone us free-of-charge on 0800 521145, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

**Datapost:** Despatch on same day whenever possible.

**Access & Barclaycard:** Telephone orders taken by our mail order dept, instant credit & interest-free H.P.



**ORDER  
OF YOUR COPY  
CATALOGUE ON SALE SOON**

Pick up a copy from any W.H. Smith for just £1.95 or post this coupon now to receive your copy by post for just £1.95 + 50p p & p. If you live outside the U.K. send £3.40 or 15 International Reply Coupons. I enclose £2.45.

Name \_\_\_\_\_  
Address \_\_\_\_\_

Send to Maplin Electronics, P.O. Box 3, Rayleigh, Essex SS6 8LR.  
**AVAILABLE FROM 11th NOVEMBER 1988 IN ALL W.H. SMITH STORES**

# THE NEW MAPLIN CATALOGUE IT'S OUT OF THIS WORLD

SEND FOR YOUR COPY TODAY



1988 BUYER'S GUIDE TO ELECTRONIC COMPONENTS  
**Maplin**