


AM/FM Radio Station
Application Data and
Reference Guide

RCA

for Broadcast Transmitter,
Antenna, Remote Pickup and
STL Systems

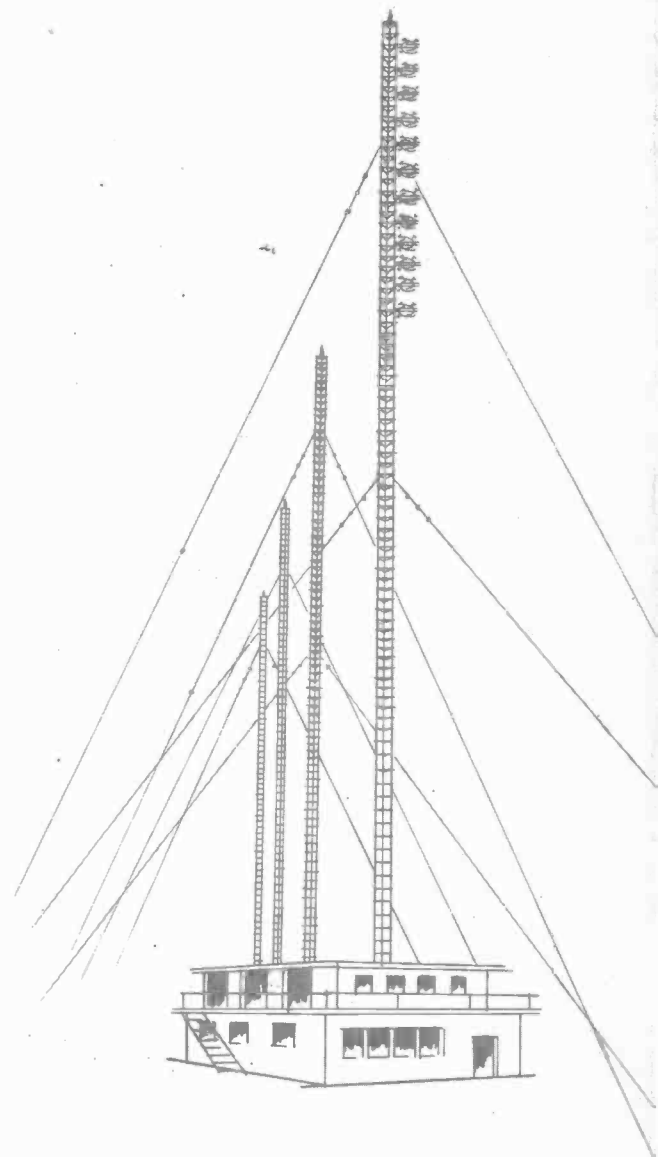

AM/FM
RADIO STATION APPLICATION DATA
AND REFERENCE GUIDE
for
BROADCAST TRANSMITTER, ANTENNA,
REMOTE PICKUP
and
STL SYSTEMS

RCA

5th Edition—RAD-75

Prepared by

Broadcast Systems

Front & Cooper Streets, Camden, New Jersey, U.S.A. 08102

PRICE: TWO DOLLARS

CHANGES IN DESIGN—In order to make improvements in design and to effect economies in manufacture, RCA reserves the right to change the design of its products at any time, and in accordance with its sole judgment, while adhering in good faith to the intent of the information contained herein.

Data included in this book are primarily for use in filing applications with the U. S. Federal Communications Commission. However, the general information included also has world-wide application. Rules and requirements, of course, vary with individual government regulatory bodies.

Complete information on referenced equipment is included in the current RCA Radio Equipment Catalog. Copies are available on request from RCA Broadcast Systems, Camden, N. J. 08102, U. S. A.



FOREWORD

This filing information manual presents the equipment engineering data necessary to complete FCC Form 313 and Sections V-A and V-B of Forms 301 and 340. As such, it should provide a quick reference for the specific filing data required. Detailed descriptions and specifications of the complete line of broadcast equipment manufactured by RCA for AM and FM stations are contained in RCA AM and FM broadcast catalogs. RCA also offers custom built equipment to meet special requirements.

A brief explanation of FCC rules is included to assist the reader in planning remote pickup and STL equipment facilities. However, reference should be made directly to the FCC rules to assure compliance and accuracy wherever necessary.

CONTENTS

Sample AM Broadcast Application (Engineering Data, FCC Forms 301, 340)	5
Sample FM Broadcast Application (Engineering Data, FCC Forms 301, 340)	6
Transmitter Power Ratings	8
Monitor Equipment	8
Remote Control Systems	9
FM Antennas	
Circularly Polarized Radiator Specifications, BFC Series	12
Circularly Polarized Radiator Specifications, BFG Series	14
Circularly Polarized Radiator Specifications, BFI Series	15
Circularly Polarized Radiator Specifications, BFH Series	16
Circularly Polarized Radiator Specifications, BFB Series	17
Vertical Radiation Patterns, BFC Series	19
AM/FM Isolation Units	23
Deicer Cables and Power, BFC, BFG, BFH Series	24
Coaxial Transmission Line	
Coaxial Line Types and Specifications	25
Rigid Coaxial Line, Specifications and Attenuation	26
Attenuation and Power Curves, Andrews 50 Ohm Air Dielectric Heliac	28
Attenuation and Power Curves, Andrews 50 Ohm Foam Heliac	29
Attenuation and Power Curves, Cablewave Air Wellflex Cable	30
Attenuation and Power Curves, Cablewave Foam Wellflex Cable	31
Auxiliary Broadcast Services	
STL Frequencies	32
Remote Pickup Allocations and Authorizations	33
Sample Remote Pickup or STL Application (FCC Form 313)	35
Remote Pickup and STL Application Data Table	37
Reference Data	
FM Broadcast Station Classes and Frequencies	39
Distance to Receiving Location and Depression Angles for Various FM Antenna Heights	40
FM Range Chart	41
FM Estimated Field Strength Chart	42
Footage Table for Broadcast Tower Heights	43
Minimum Windload Map and Table	44
dB/Efficiency Conversion Chart	45
kW/dBk Conversion Table	46
FM Transmitter Floor Plans	48
AM Transmitter Floor Plans	49

SAMPLE AM BROADCAST APPLICATION

ENGINEERING DATA (FCC FORMS 301, 340)*

FCC Form 301	FEDERAL COMMUNICATIONS COMMISSION	Section V - A																										
STANDARD BROADCAST ENGINEERING DATA	Name of applicant																											
<p>1. Indicate by check mark the purpose of this application. (The items of this Section that are applicable to, and must be answered for, each category are shown to the right of the category.)</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 45%; border: none;"> <input type="checkbox"/> Construct a new station <input type="checkbox"/> Change station location to a different city or town <input type="checkbox"/> Change power <input type="checkbox"/> Change transmitter location <input type="checkbox"/> Change frequency <input type="checkbox"/> Change from DA to Non-DA <input type="checkbox"/> Change from Non-DA to DA <input type="checkbox"/> Change in antenna system (including increase in height by addition of FM or TV antenna) </td> <td style="width: 5%; border: none; text-align: center; vertical-align: middle;">} All items</td> <td style="width: 50%; border: none;"> <input type="checkbox"/> Install new Auxiliary Transmitter <input type="checkbox"/> Install new Alternate Main Transmitter <input type="checkbox"/> Change transmitter (non type accepted) <input type="checkbox"/> Change Main Studio Location to point outside city limits and not at transmitter site <input type="checkbox"/> Change Hours of Operation <input type="checkbox"/> Other (specify): _____ </td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;"></td> <td style="border: none;"> 2 thru 7, and 10 2 thru 7 2 thru 7 (and appropriate other items) </td> </tr> </table>			<input type="checkbox"/> Construct a new station <input type="checkbox"/> Change station location to a different city or town <input type="checkbox"/> Change power <input type="checkbox"/> Change transmitter location <input type="checkbox"/> Change frequency <input type="checkbox"/> Change from DA to Non-DA <input type="checkbox"/> Change from Non-DA to DA <input type="checkbox"/> Change in antenna system (including increase in height by addition of FM or TV antenna)	} All items	<input type="checkbox"/> Install new Auxiliary Transmitter <input type="checkbox"/> Install new Alternate Main Transmitter <input type="checkbox"/> Change transmitter (non type accepted) <input type="checkbox"/> Change Main Studio Location to point outside city limits and not at transmitter site <input type="checkbox"/> Change Hours of Operation <input type="checkbox"/> Other (specify): _____			2 thru 7, and 10 2 thru 7 2 thru 7 (and appropriate other items)																				
<input type="checkbox"/> Construct a new station <input type="checkbox"/> Change station location to a different city or town <input type="checkbox"/> Change power <input type="checkbox"/> Change transmitter location <input type="checkbox"/> Change frequency <input type="checkbox"/> Change from DA to Non-DA <input type="checkbox"/> Change from Non-DA to DA <input type="checkbox"/> Change in antenna system (including increase in height by addition of FM or TV antenna)	} All items	<input type="checkbox"/> Install new Auxiliary Transmitter <input type="checkbox"/> Install new Alternate Main Transmitter <input type="checkbox"/> Change transmitter (non type accepted) <input type="checkbox"/> Change Main Studio Location to point outside city limits and not at transmitter site <input type="checkbox"/> Change Hours of Operation <input type="checkbox"/> Other (specify): _____																										
		2 thru 7, and 10 2 thru 7 2 thru 7 (and appropriate other items)																										
If this application is not for a new station, summarize briefly the nature of the changes proposed:																												
<p>2. Facilities requested</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">Frequency</td> <td style="width: 25%;">Hours of operation</td> <td style="width: 50%;">Power in kilowatts Night Day</td> </tr> </table>			Frequency	Hours of operation	Power in kilowatts Night Day																							
Frequency	Hours of operation	Power in kilowatts Night Day																										
<p>3. Station location</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">State</td> <td style="width: 75%;">City or town</td> </tr> </table>			State	City or town																								
State	City or town																											
<p>4. Transmitter location</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">State</td> <td style="width: 75%;">County</td> </tr> <tr> <td style="width: 25%;">City or town</td> <td style="width: 75%;">Street Address (or other identification)</td> </tr> </table>			State	County	City or town	Street Address (or other identification)																						
State	County																											
City or town	Street Address (or other identification)																											
<p>5. Main studio location</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">State</td> <td style="width: 75%;">County</td> </tr> <tr> <td style="width: 25%;">City or town</td> <td style="width: 75%;">Street and number, if known</td> </tr> </table>			State	County	City or town	Street and number, if known																						
State	County																											
City or town	Street and number, if known																											
<p>6. Remote control point location</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">State</td> <td style="width: 75%;">City or town</td> </tr> <tr> <td colspan="2">Street Address (or other identification)</td> </tr> </table>			State	City or town	Street Address (or other identification)																							
State	City or town																											
Street Address (or other identification)																												
<p>7. Transmitter</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Make</td> <td style="width: 30%;">Type No.</td> <td style="width: 40%;">Rated Power</td> </tr> </table> <p style="font-size: 2em; text-align: center; margin-top: 10px;"><i>See Page 8</i></p> <p>(If the above transmitter has not been accepted for licensing by the F.C.C., attach as Exhibit No. _____ a complete showing of transmitter details. Showing should include schematic diagram and full details of frequency control. If changes are to be made in licensed transmitter include schematic diagram and give full details of change.)</p>			Make	Type No.	Rated Power																							
Make	Type No.	Rated Power																										
<p>8. Modulation monitor</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Make</td> <td style="width: 30%;">Type No.</td> <td style="width: 40%;"></td> </tr> </table> <p style="font-size: 2em; text-align: center; margin-top: 10px;"><i>See Page 8</i></p>			Make	Type No.																								
Make	Type No.																											
<p>9. Frequency monitor</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Make</td> <td style="width: 30%;">Type No.</td> <td style="width: 40%;"></td> </tr> </table>			Make	Type No.																								
Make	Type No.																											
<p>10. Antenna system, including ground or counterpoise</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">Non-Directional Antenna: Day <input type="checkbox"/> Night <input type="checkbox"/></td> <td style="width: 50%;">Directional Antenna: Day only (DA-D) <input type="checkbox"/> Night only (DA-N) <input type="checkbox"/> Same constants and power day and night (DA-1) <input type="checkbox"/> Different constants or power day and night (DA-2) <input type="checkbox"/></td> </tr> <tr> <td colspan="2">(If a directional antenna is proposed submit complete engineering data. Show clearly whether directional operation is for day or night or both. If day and night patterns are different give full information on each pattern. This information is in addition to the information in Paragraph 10 and is submitted as Exhibit No. _____ and signed by the engineer who designed the antenna system.)</td> </tr> <tr> <td>Type radiator</td> <td>Height in feet of complete radiator above base insulator, or above base if grounded.</td> </tr> <tr> <td>Overall height in feet above ground. (Without obstruction lighting)</td> <td>Overall height in feet above mean sea level. (Without obstruction lighting)</td> </tr> <tr> <td>Overall height in feet above ground. (With obstruction lighting)</td> <td>Overall height in feet above mean sea level. (With obstruction lighting)</td> </tr> <tr> <td colspan="2">If antenna is either top loaded or sectionalized, describe fully as Exhibit No. _____</td> </tr> <tr> <td>Excitation</td> <td>Series <input type="checkbox"/> Shunt <input type="checkbox"/></td> </tr> <tr> <td colspan="2">Geographic coordinates to nearest second. For direction antenna give coordinates of center of array. For single vertical radiator give tower location.</td> </tr> <tr> <td>North latitude</td> <td>West longitude</td> </tr> <tr> <td style="text-align: center;">° ' "</td> <td style="text-align: center;">° ' "</td> </tr> <tr> <td colspan="2">If not fully described above, give further details and dimensions including any other antennas mounted on tower and associated isolation circuits as Exhibit No. _____ (Height figures should not include obstruction lighting.)</td> </tr> <tr> <td colspan="2">Submit as Exhibit No. _____ a plat of the transmitter site showing boundary lines, and roads, railroads, or other obstructions; and also layout of the ground system or counterpoise. Show number and dimensions of ground radials or if a counterpoise is used, show height and dimensions.</td> </tr> <tr> <td colspan="2"> <p>11. Attach as Exhibit No. _____ a sufficient number of aerial photographs taken in clear weather at appropriate altitudes and angles to permit identification of all structures in the vicinity. The photographs must be marked so as to show compass directions, exact boundary lines of the proposed site, and locations of the proposed 1000 mv/m contour for both day and night operation. Photographs taken in eight different directions from an elevated position on the ground will be acceptable in lieu of the aerial photographs if the data referred to can be clearly shown.</p> </td> </tr> </table>			Non-Directional Antenna: Day <input type="checkbox"/> Night <input type="checkbox"/>	Directional Antenna: Day only (DA-D) <input type="checkbox"/> Night only (DA-N) <input type="checkbox"/> Same constants and power day and night (DA-1) <input type="checkbox"/> Different constants or power day and night (DA-2) <input type="checkbox"/>	(If a directional antenna is proposed submit complete engineering data. Show clearly whether directional operation is for day or night or both. If day and night patterns are different give full information on each pattern. This information is in addition to the information in Paragraph 10 and is submitted as Exhibit No. _____ and signed by the engineer who designed the antenna system.)		Type radiator	Height in feet of complete radiator above base insulator, or above base if grounded.	Overall height in feet above ground. (Without obstruction lighting)	Overall height in feet above mean sea level. (Without obstruction lighting)	Overall height in feet above ground. (With obstruction lighting)	Overall height in feet above mean sea level. (With obstruction lighting)	If antenna is either top loaded or sectionalized, describe fully as Exhibit No. _____		Excitation	Series <input type="checkbox"/> Shunt <input type="checkbox"/>	Geographic coordinates to nearest second. For direction antenna give coordinates of center of array. For single vertical radiator give tower location.		North latitude	West longitude	° ' "	° ' "	If not fully described above, give further details and dimensions including any other antennas mounted on tower and associated isolation circuits as Exhibit No. _____ (Height figures should not include obstruction lighting.)		Submit as Exhibit No. _____ a plat of the transmitter site showing boundary lines, and roads, railroads, or other obstructions; and also layout of the ground system or counterpoise. Show number and dimensions of ground radials or if a counterpoise is used, show height and dimensions.		<p>11. Attach as Exhibit No. _____ a sufficient number of aerial photographs taken in clear weather at appropriate altitudes and angles to permit identification of all structures in the vicinity. The photographs must be marked so as to show compass directions, exact boundary lines of the proposed site, and locations of the proposed 1000 mv/m contour for both day and night operation. Photographs taken in eight different directions from an elevated position on the ground will be acceptable in lieu of the aerial photographs if the data referred to can be clearly shown.</p>	
Non-Directional Antenna: Day <input type="checkbox"/> Night <input type="checkbox"/>	Directional Antenna: Day only (DA-D) <input type="checkbox"/> Night only (DA-N) <input type="checkbox"/> Same constants and power day and night (DA-1) <input type="checkbox"/> Different constants or power day and night (DA-2) <input type="checkbox"/>																											
(If a directional antenna is proposed submit complete engineering data. Show clearly whether directional operation is for day or night or both. If day and night patterns are different give full information on each pattern. This information is in addition to the information in Paragraph 10 and is submitted as Exhibit No. _____ and signed by the engineer who designed the antenna system.)																												
Type radiator	Height in feet of complete radiator above base insulator, or above base if grounded.																											
Overall height in feet above ground. (Without obstruction lighting)	Overall height in feet above mean sea level. (Without obstruction lighting)																											
Overall height in feet above ground. (With obstruction lighting)	Overall height in feet above mean sea level. (With obstruction lighting)																											
If antenna is either top loaded or sectionalized, describe fully as Exhibit No. _____																												
Excitation	Series <input type="checkbox"/> Shunt <input type="checkbox"/>																											
Geographic coordinates to nearest second. For direction antenna give coordinates of center of array. For single vertical radiator give tower location.																												
North latitude	West longitude																											
° ' "	° ' "																											
If not fully described above, give further details and dimensions including any other antennas mounted on tower and associated isolation circuits as Exhibit No. _____ (Height figures should not include obstruction lighting.)																												
Submit as Exhibit No. _____ a plat of the transmitter site showing boundary lines, and roads, railroads, or other obstructions; and also layout of the ground system or counterpoise. Show number and dimensions of ground radials or if a counterpoise is used, show height and dimensions.																												
<p>11. Attach as Exhibit No. _____ a sufficient number of aerial photographs taken in clear weather at appropriate altitudes and angles to permit identification of all structures in the vicinity. The photographs must be marked so as to show compass directions, exact boundary lines of the proposed site, and locations of the proposed 1000 mv/m contour for both day and night operation. Photographs taken in eight different directions from an elevated position on the ground will be acceptable in lieu of the aerial photographs if the data referred to can be clearly shown.</p>																												

SAMPLE FM BROADCAST APPLICATION

ENGINEERING DATA (FCC FORMS 301, 340)*

FCC Form 301	FEDERAL COMMUNICATIONS COMMISSION	Section V-B		
FM BROADCAST ENGINEERING DATA	Name of applicant			
<p>1. Purpose of authorization applied for: (Indicate by check mark)</p> <p>(If application is for a new station or for any of the changes numbered B through D, complete all paragraphs of this form: if change E is of a character which will change coverage or increase the overall height of the antenna structure more than 20 feet, answer all paragraphs, otherwise complete only paragraphs 2 and 10 and the appropriate other paragraphs; for changes F through H, complete only paragraph 2 and the appropriate other paragraphs; for change I, complete only paragraphs 2 and 5.)</p> <table style="width: 100%;"> <tr> <td style="width: 50%;"> <p>A. <input type="checkbox"/> Construct a new station</p> <p>B. <input type="checkbox"/> Change effective radiated power or antenna height above average terrain</p> <p>C. <input type="checkbox"/> Change transmitter location</p> <p>D. <input type="checkbox"/> Change frequency</p> </td> <td style="width: 50%;"> <p>E. <input type="checkbox"/> Change antenna system</p> <p>F. <input type="checkbox"/> Change transmitter</p> <p>G. <input type="checkbox"/> Install auxiliary or alternate main transmitter</p> <p>H. <input type="checkbox"/> Other changes (specify)</p> <p>I. <input type="checkbox"/> Change studio location</p> </td> </tr> </table> <p>If this is not for a new station, summarize briefly the nature of the changes proposed.</p>			<p>A. <input type="checkbox"/> Construct a new station</p> <p>B. <input type="checkbox"/> Change effective radiated power or antenna height above average terrain</p> <p>C. <input type="checkbox"/> Change transmitter location</p> <p>D. <input type="checkbox"/> Change frequency</p>	<p>E. <input type="checkbox"/> Change antenna system</p> <p>F. <input type="checkbox"/> Change transmitter</p> <p>G. <input type="checkbox"/> Install auxiliary or alternate main transmitter</p> <p>H. <input type="checkbox"/> Other changes (specify)</p> <p>I. <input type="checkbox"/> Change studio location</p>
<p>A. <input type="checkbox"/> Construct a new station</p> <p>B. <input type="checkbox"/> Change effective radiated power or antenna height above average terrain</p> <p>C. <input type="checkbox"/> Change transmitter location</p> <p>D. <input type="checkbox"/> Change frequency</p>	<p>E. <input type="checkbox"/> Change antenna system</p> <p>F. <input type="checkbox"/> Change transmitter</p> <p>G. <input type="checkbox"/> Install auxiliary or alternate main transmitter</p> <p>H. <input type="checkbox"/> Other changes (specify)</p> <p>I. <input type="checkbox"/> Change studio location</p>			
2. Facilities requested		9. Frequency monitor		
Frequency	Channel No.	Make See Page 8 Type No.		
Mc/s.				
Effective Radiated Power	Antenna height above average terrain	10. (a) Antenna structure:		
Horizontal kw	Horizontal feet	Is the proposed construction in the immediate vicinity or does it serve to modify the construction of any standard broadcast station, FM broadcast station, television broadcast station, or other class of radio station? If "Yes", attach as Exhibit No. complete engineering data thereon.		
Vertical kw	Vertical feet	YES <input type="checkbox"/> NO <input type="checkbox"/>		
3. Station location		Submit as Exhibit No. a vertical plan sketch for the proposed total structure (including supporting building if any) giving heights above ground in feet for all significant features.		
State	City or town	Overall height in feet above ground. (Without obstruction lighting)		
4. Transmitter location (principal community)		Overall height in feet above mean sea level. (Without obstruction lighting)		
State	County	Overall height in feet above ground. (With obstruction lighting)		
City or town	Street Address (or other identification)	Overall height in feet above mean sea level. (With obstruction lighting)		
5. Main studio location		Height of antenna radiation center in feet above mean level.		
State	County	Horizontal		
City or town	Street address	Vertical		
6. Remote control point location		Geographical coordinates of antenna (to nearest second)		
State	City or town	North latitude 0 West longitude 0		
Street Address (or other identification)		(b) Antenna data		
7. Transmitter		Make Type No. or description		
Make See Page 8	Type No.	Rated Power		
		No. of sections		
		Horizontal gain		
		Vertical gain		
(If the above transmitter has not been accepted for licensing by the F.C.C., attach as Exhibit No. a complete showing of transmitter details. Showing should include schematic diagram and full details of frequency control. If changes are to be made in licensed transmitter include schematic diagram and give full details of change.)		If directional antenna is proposed, give full details including horizontal and vertical plane radiation patterns, as Exhibit No.		
		Is electrical or mechanical beam tilting proposed? YES <input type="checkbox"/> NO <input type="checkbox"/>		
		If so, describe fully in Exhibit No. including horizontal and pertinent vertical radiation patterns.		
8. Modulation monitor		Will antenna be altered to provide null fill-in? YES <input type="checkbox"/> NO <input type="checkbox"/>		
Make See Page 8	Type No.	If yes, describe fully in Exhibit No.		

TRANSMITTER POWER RATINGS

AM TRANSMITTERS (Medium Wave)

Type	Rated Output Power kW
BTA-1S and BTA-1N1 (Operating 250W)25
BTA-1S and BTA-1N1 (Operating 500W)50
BTA-1S and BTA-1N1	1
BTA-5L1	5
BTA-10L1	10
BTA-20L1*	20
BTA-50J	50
BTA-100J	100
BTA-200J*	200

*Parallel Systems.
All RCA AM (Medium Wave) Transmitters are available as parallel systems.

FM TRANSMITTERS

Type	No. of Outputs	Rated Power, Each kW	Output dBk
BTF-1E2	1	1.00	0.00
BTF-1/1E2	2	1.00	0.00
BTF-1 plus 1E2	1	2.00	3.01
BTF-1.5E1	1	1.50	1.76
BTF-1.5/1.5E1	2	1.50	1.76
BTF-1.5 plus 1.5E1	1	3.00	4.77
BTF-3E1	1	3.00	4.77
BTF-3/3E1	2	3.00	4.77
BTF-3 plus 3E1	1	6.00	7.78
BTF-5E1	1	5.00	6.99
BTF-5/5E1	2	5.00	6.99
BTF-5 plus 5E1	1	10.00	10.00
BTF-5E2	1	5.00	6.99
BTF-5/5E2	2	5.00	6.99
BTF-5 plus 5E2	1	10.00	10.00
BTF-10E1	1	10.00	10.00
BTF-10/10E1	2	10.00	10.00
BTF-10 plus 10E1	1	20.00	13.01
BTF-20E1	1	20.00	13.01
BTF-20/20E1	2	20.00	13.01
BTF-40E1	1	40.00	16.02
BTE-10CT (Tube)	1	.01	-20.00
BTE-15A (Solid State)	1	.01	-20.00

MONITORING EQUIPMENT

AM MONITOR DATA

Description	Make	Type
Modulation Monitor	RCA	} BW-50
Frequency Monitor	RCA	
RF Amplifier*	RCA	BW-60
Phase Monitor, Analog Readout	Potomac	AM-19 (204)
Phase Monitor, Digital Readout	Potomac	AM-19-D (210)
Phase Monitor, Precision System	Potomac	PM-19

FM MONITOR DATA

Description	Make	Type
Monaural Frequency & Modulation Monitor	RCA	BW-75A
Stereo Frequency & Modulation Monitor	RCA	BW-85A
SCA Frequency & Modulation Monitor	RCA	BW-95A
RF Amplifier*	RCA	BW-100

*Required when monitors are located at other than transmitter site.

BTR-15B REMOTE CONTROL SYSTEMS

(For AM/FM Transmitters)

15 metering functions; 30 control functions (15 On/Raise; 15 Off/Lower)

BTR-15BW SYSTEM

Audible Control and Audible Metering Return Over Voice Grade Telephone Line
(DC continuity not required)

ES-561157

Quantity	Description	Reference
1	Transmitter Unit	MI-561187
1	Studio Unit	MI-561188
1	Meter**	MI-561444-120


BTR-15BR SYSTEM

Audible Control Over Internal Subcarrier Generator and Demodulator, and
Subaudible Metering Return Over Optional Internal Subcarrier Generator
and Demodulator

ES-561158-*

(Choice of Control Subcarrier Frequency*)

Quantity	Description	Reference
1	Transmitter Unit	MI-561187-*
1	Studio Unit	MI-561190-*
1	Meter**	MI-561444-120

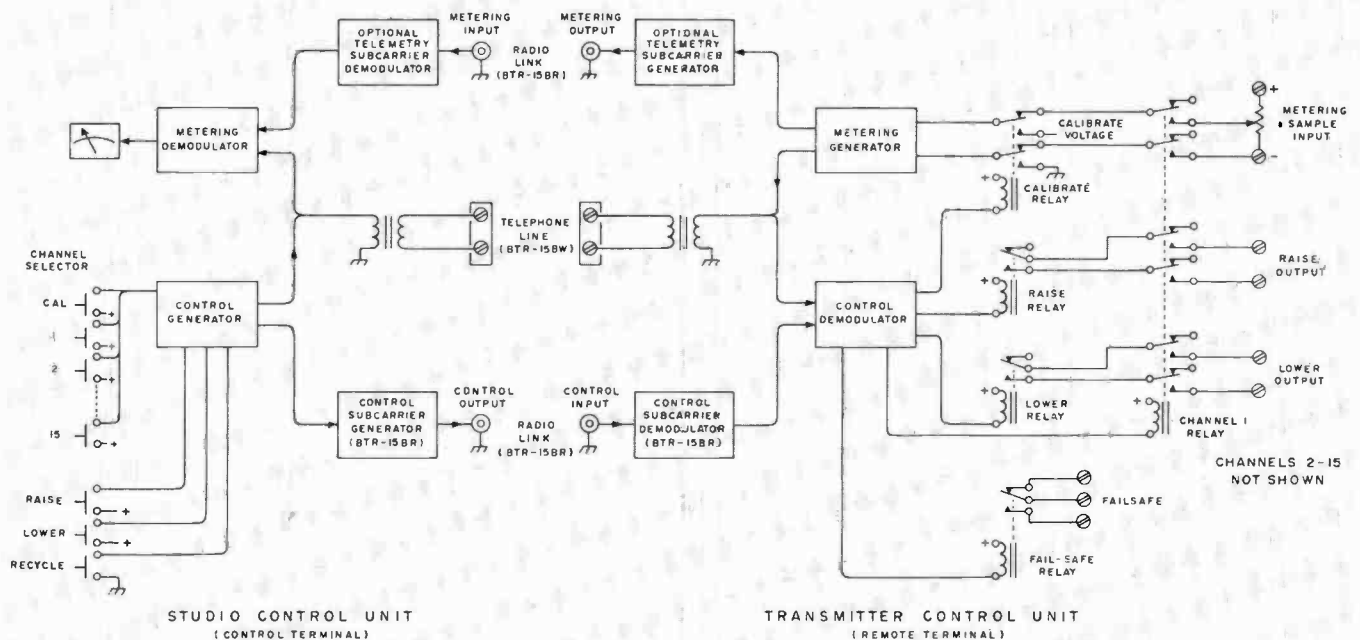

Block Diagram of BTR-15BR/BTR-15BW

*When ordering, specify desired control subcarrier frequency as part of ES- and MI-Numbers. Custom systems can be supplied with any specified subcarrier frequency from 26 to 185 kHz. Standard systems are available with optional frequencies of 26, 41, 42, 67, 110, 135, 185 kHz. Can also be supplied for use with external subcarrier.

**This item to be installed in Studio Unit.

BTR-30A REMOTE CONTROL SYSTEMS

(For AM/FM Transmitters)

30 metering functions; 60 control functions (30 On/Raise; 30 Off/Lower)

AM Radio Systems using BTR-30A

Control via			Telemetry via		System Catalog Identification
Land Lines	STL Subcarrier		Land Lines	Transmitter ³	
	26 kHz ¹	External Generator ²			
•			•		ES-561446-1
	•		•		ES-561446-5
	•			•	ES-561446-6
		•	•		ES-561446-15
		•		•	ES-561446-16

¹Subcarrier generator included in system.

²Subcarrier generator not included in system (optional item).

³Subaudible telemetry equipment not included in system (optional item).

FM Mono Radio Systems using BTR-30A

Control via			Telemetry via			System Catalog Identification
Land Lines	STL Subcarrier		Land Lines	Transmitter Subcarrier		
	26 kHz ¹	External Generator ²		67 kHz ¹	External Generator ²	
•			•			ES-561446-1
	•			•		ES-561446-3
	•				•	ES-561446-4
	•		•			ES-561446-5
		•		•		ES-561446-13
		•			•	ES-561446-14
		•	•			ES-561446-15

¹Subcarrier generator included in system.

²Subcarrier generator not included in system (optional item).

FM-Stereo Radio Systems using BTR-30A

Control via			Telemetry via			System Catalog Identification
Land Lines	STL Subcarrier		Land Lines	Transmitter Subcarrier		
	110 kHz ¹	External Generator ²		67 kHz ¹	External Generator ²	
•			•			ES-561446-1
	•			•		ES-561446-8
	•				•	ES-561446-9
	•		•			ES-561446-10
		•		•		ES-561446-13
		•			•	ES-561446-14
		•	•			ES-561446-15


¹Subcarrier generator included in system.

²Subcarrier generator not included in system (optional item).

Block diagram of BTR-30A System is on page 11.

REMOTE CONTROL SYSTEMS

(For AM/FM Transmitters)

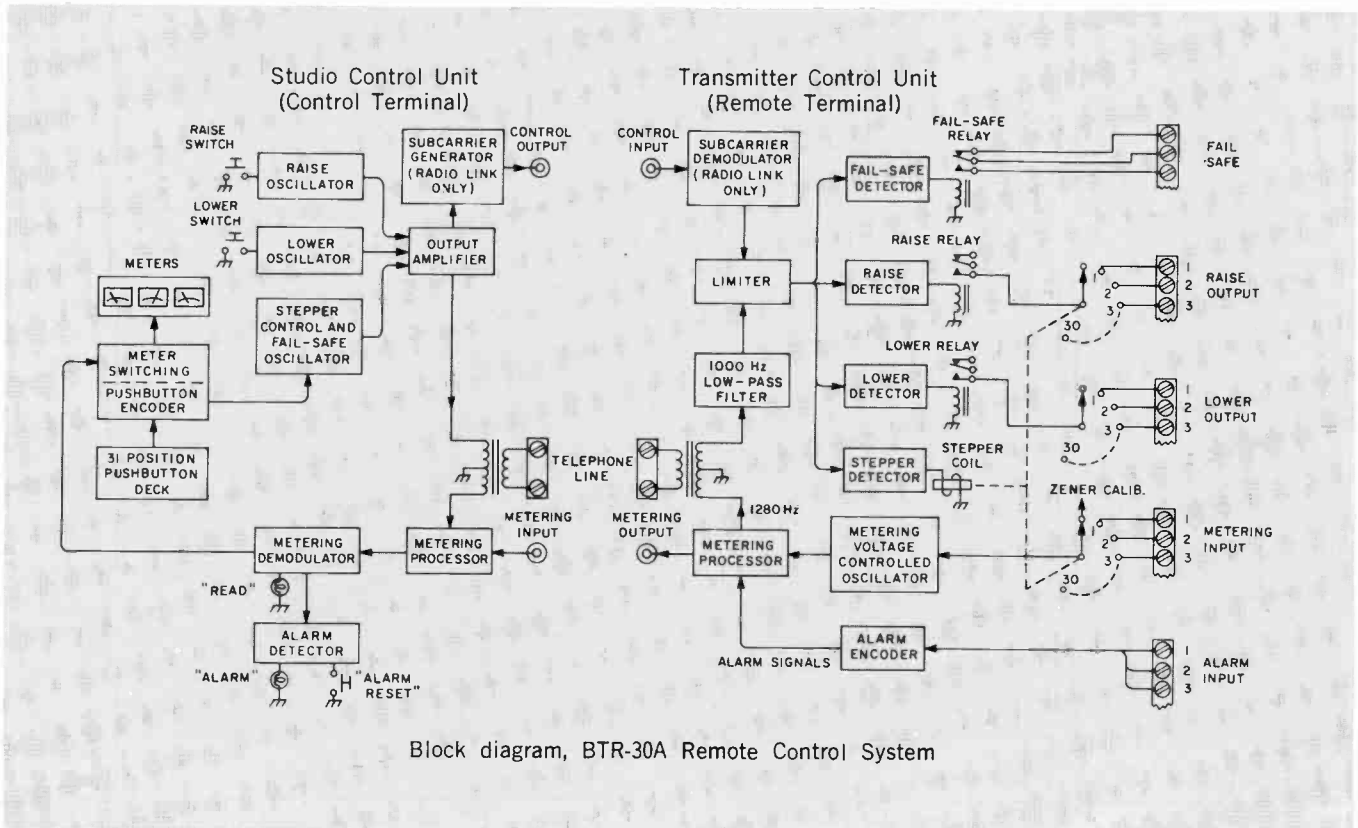


ACCESSORIES FOR REMOTE CONTROL SYSTEMS

Extra Meters (specify ranges)	MI-561444
Meter Panels:	
One-Meter	ES-561443-1
Two-Meter	ES-561443-2
Three-Meter	ES-561443-3
Telemetry Subcarrier Generator (67 Hz)	MI-561181-1
Telemetry Subcarrier Generator (specified frequency)	MI-561181-(Frequency)
MIU-Metering Insertion Unit (for AM carrier telemetry)	MI-561458
MIU-Metering Recovery Unit (for AM carrier telemetry)	MI-561459
BTX-1A Subcarrier Generator (program plus telemetry)	ES-27295

FM ANTENNAS

CIRCULARLY POLARIZED RADIATOR SPECIFICATIONS, BFC SERIES

Mounting Dimensions and Feed Line Locations for BFC Series Antennas

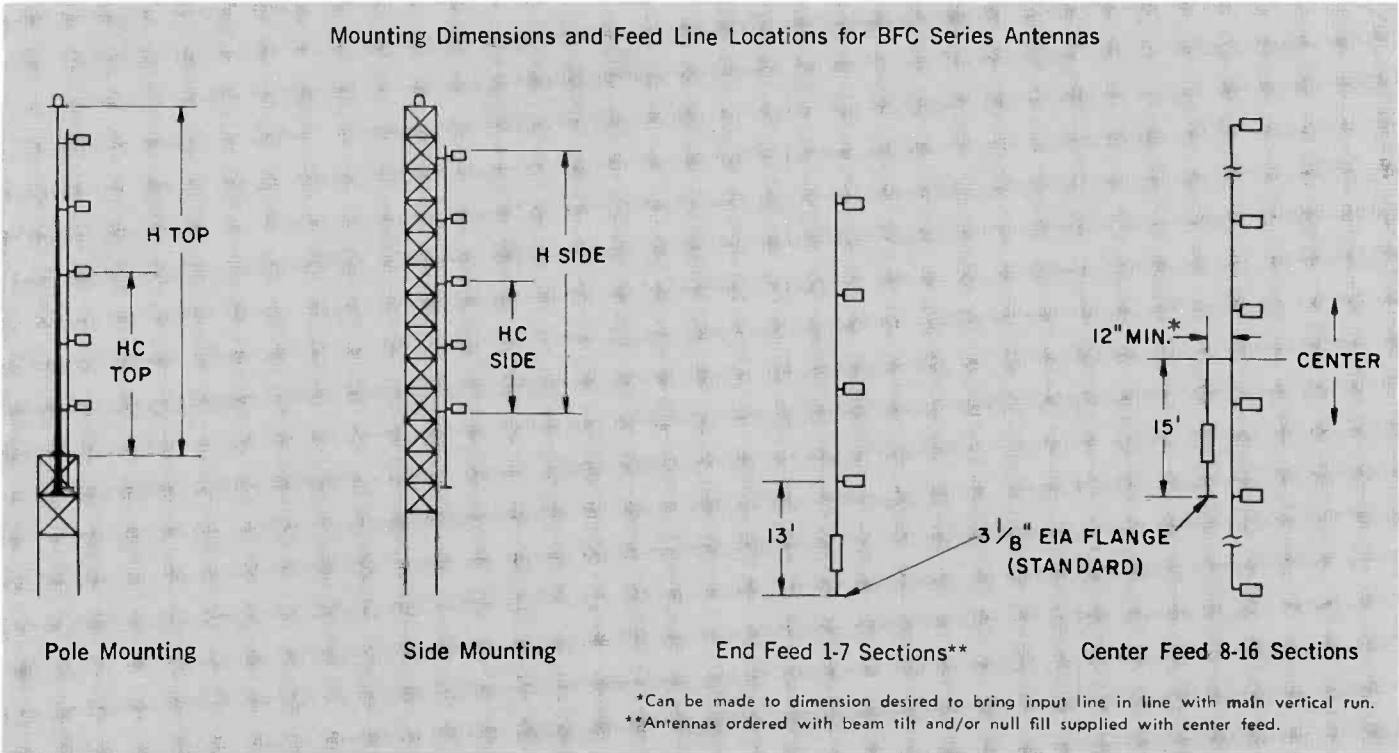

Mechanical Data, BFC Series

Antenna Type	Freq. MHz	Dimensions in Feet (Meters) ¹				Windload ¹ at 50/30 lbs/ft ² (244/146 kg/m ²)									
		Hc Top Feet	Hc Top Meters	Hc Side Feet	Hc Side Meters	H Top Feet	H Top Meters	H Side Feet	H Side Meters	Less De-Icers Lbs.	Less De-Icers Kg.	With De-Icers Lbs.	With De-Icers Kg.	With Radomes Lbs.	With Radomes Kg.
BFC-1B	88	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	178	81	198	90	332	151
	98	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	178	81	198	90	332	151
	108	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	178	81	198	90	332	151
BFC-2B	88	10.6	3.23	6.4	1.95	19.2	5.85	12.8	3.90	337	153	377	171	645	293
	98	10.0	3.05	5.8	1.77	19.0	5.79	11.7	3.57	327	148	367	167	635	288
	108	9.5	2.90	5.4	1.65	18.0	5.49	10.8	3.29	319	145	359	163	627	284
BFC-3B	88	16.2	4.93	11.9	3.63	30.4	9.27	23.9	7.28	495	225	555	252	957	434
	98	15.0	4.57	10.9	3.32	28.9	8.81	21.8	6.64	475	215	535	243	937	425
	108	14.1	4.30	9.9	3.02	27.5	8.38	19.9	6.07	459	208	519	235	921	418
BFC-4B	88	21.7	6.61	17.6	5.36	41.5	12.65	35.2	10.73	653	296	723	328	1269	576
	98	20.0	6.10	15.9	4.85	38.4	11.70	31.8	9.69	623	283	703	319	1239	562
	108	18.6	5.67	14.5	4.42	36.8	11.22	29.0	8.84	599	272	679	308	1215	551
BFC-5B	88	27.3	8.32	23.2	7.07	52.7	16.06	46.4	14.14	810	367	911	413	1581	717
	98	25.0	7.62	20.9	6.37	49.4	15.06	41.8	12.74	791	359	871	395	1541	699
	108	23.2	7.07	19.0	5.79	46.1	14.05	38.1	11.61	763	346	839	381	1510	685
BFC-6B	88	32.9	10.03	28.8	8.78	63.9	19.48	57.6	17.56	970	440	1090	494	1874	850
	98	30.0	9.14	25.4	7.74	59.3	18.07	50.9	15.51	920	417	1040	472	1824	827
	108	27.7	8.44	23.6	7.19	54.9	16.73	47.2	14.39	882	400	1000	454	1784	809
BFC-7B	88	38.5	11.73	34.3	10.45	75.0	22.86	68.7	20.94	1128	512	1268	575	2183	990
	98	35.1	10.70	30.9	9.42	68.7	20.94	61.9	18.87	1068	484	1208	548	2123	963
	108	32.3	9.85	28.1	8.56	64.2	19.57	56.3	17.16	1020	463	1160	526	2075	941
BFC-8B	88	44.0	13.41	40.0	12.19	86.2	26.27	80.0	24.38	1308	593	1468	666	2514	1140
	98	40.1	12.22	35.9	10.94	78.9	24.05	71.9	21.92	1238	562	1398	634	2454	1113
	108	36.8	11.22	32.7	9.97	73.2	22.31	65.4	19.93	1182	536	1342	609	2390	1084
BFC-10B	88	55.2	16.82	51.1	15.58	108.6	33.22	102.2	33.22	1625	737	1875	851	3165	1436
	98	50.1	15.27	46.0	14.02	98.6	30.05	92.0	28.04	1535	696	1735	787	3075	1395
	108	45.9	13.99	41.8	12.74	91.2	27.80	83.7	25.51	1483	673	1663	754	3003	1362
BFC-12B	88	66.4	20.24	62.3	18.99	131.0	39.93	124.7	38.10	1942	881	2182	990	3790	1719
	98	60.1	18.32	56.0	17.07	119.8	36.58	112.1	34.14	1832	831	2072	940	3680	1669
	108	55.0	16.76	51.0	15.54	109.6	33.53	101.9	31.09	1744	791	1984	900	3592	1629
BFC-14B	88	POLE MOUNT		73.5	22.40	POLE MOUNT		147.0	44.81	2258	1024	2538	1151	4414	2002
	98	NOT RECOMMENDED		66.1	20.15	NOT RECOMMENDED		132.2	40.23	2128	965	2408	1092	4284	1943
	108	RECOMMENDED		60.0	18.29	RECOMMENDED		120.1	36.58	2088	947	2304	1045	4244	1925
BFC-16B	88	POLE MOUNT		84.7	25.82	POLE MOUNT		169.4	51.51	2575	1168	2895	1313	5039	2286
	98	NOT RECOMMENDED		76.1	23.20	NOT RECOMMENDED		152.3	46.33	2425	1100	2745	1245	4889	2218
	108	RECOMMENDED		69.1	21.06	RECOMMENDED		138.3	42.06	2205	1000	2625	1191	4669	2118

¹Interpolate dimensions and windload for antennas of intermediate frequency.

FM ANTENNAS

CIRCULARLY POLARIZED RADIATOR SPECIFICATIONS, BFC SERIES

Electrical Data

Antenna Type	Power Gain ¹			Field Intensity ² mV/m	Power Rating ³			
	Power	dB	Field		with Radomes		without Radomes	
					kW	dBk	kW	dBk
BFC-1B	0.46	-3.37	0.678	93.2	10	10.0	4	6.02
BFC-2B	1.0	0	1.00	137.5	20	13.01	8	9.03
BFC-3B	1.5	1.76	1.23	169.1	30	14.77	12	10.79
BFC-4B	2.1	3.22	1.45	199.4	40	16.02	16	12.04
BFC-5B	2.7	4.31	1.64	225.5	40	16.02	20	13.01
BFC-6B	3.2	5.05	1.79	246.1	40	16.02	24	13.80
BFC-7B	3.8	5.80	1.95	268.1	40	16.02	28	14.47
BFC-8B	4.3	6.34	2.07	284.6	40	16.02	32	15.05
BFC-10B	5.5	7.40	2.35	323.1	40	16.02	40	16.02
BFC-12B	6.6	8.20	2.57	353.4	40	16.02	40	16.02
BFC-14B	7.8	8.92	2.79	383.6	40	16.02	40	16.02
BFC-16B	8.9	9.49	2.98	409.8	40	16.02	40	16.02

¹Power gain in each polarization.

²For each polarization, the field gain is equal to the square root of the power gain. The effective field intensity in mV/m at one mile (1.604 km) for 1 kW input is equal to 137.5 times the field gain.

³Power Rating based on a 40°C ambient. Multiply values listed by 0.8 for 50°C ambient. BFC-5 and larger antennas with greater power ratings are available on special order.


Deadweight in Pounds (kg) ¹ :	Less De-Icers	With De-Icers	With Radomes
Single Section	109 (49)	197 (89)	130 (59)
Two Sections	173 (78)	322 (146)	215 (98)
Three Sections	237 (108)	424 (215)	300 (136)
Four Sections	301 (137)	599 (272)	385 (175)
Five Sections	365 (166)	751 (341)	470 (213)
Six Sections	429 (195)	876 (397)	555 (252)
Seven Sections	493 (224)	1028 (466)	640 (290)
Eight Sections	582 (264)	1178 (534)	750 (340)
Ten Sections	710 (322)	1455 (660)	920 (417)
Twelve Sections	838 (380)	1732 (786)	1090 (494)
Fourteen Sections	966 (438)	2009 (911)	1260 (572)
Sixteen Sections	1094 (496)	2286 (1037)	1430 (649)

¹Weight includes feed system to antenna input connection and 13-to-18-inch (330 to 457 mm) extension brackets for mounting.

²De-Icer power: 750 watts per bay, nominal. May be wired for 208 or 240 V service.

FM ANTENNAS

CIRCULARLY POLARIZED RADIATOR SPECIFICATIONS, BFG SERIES

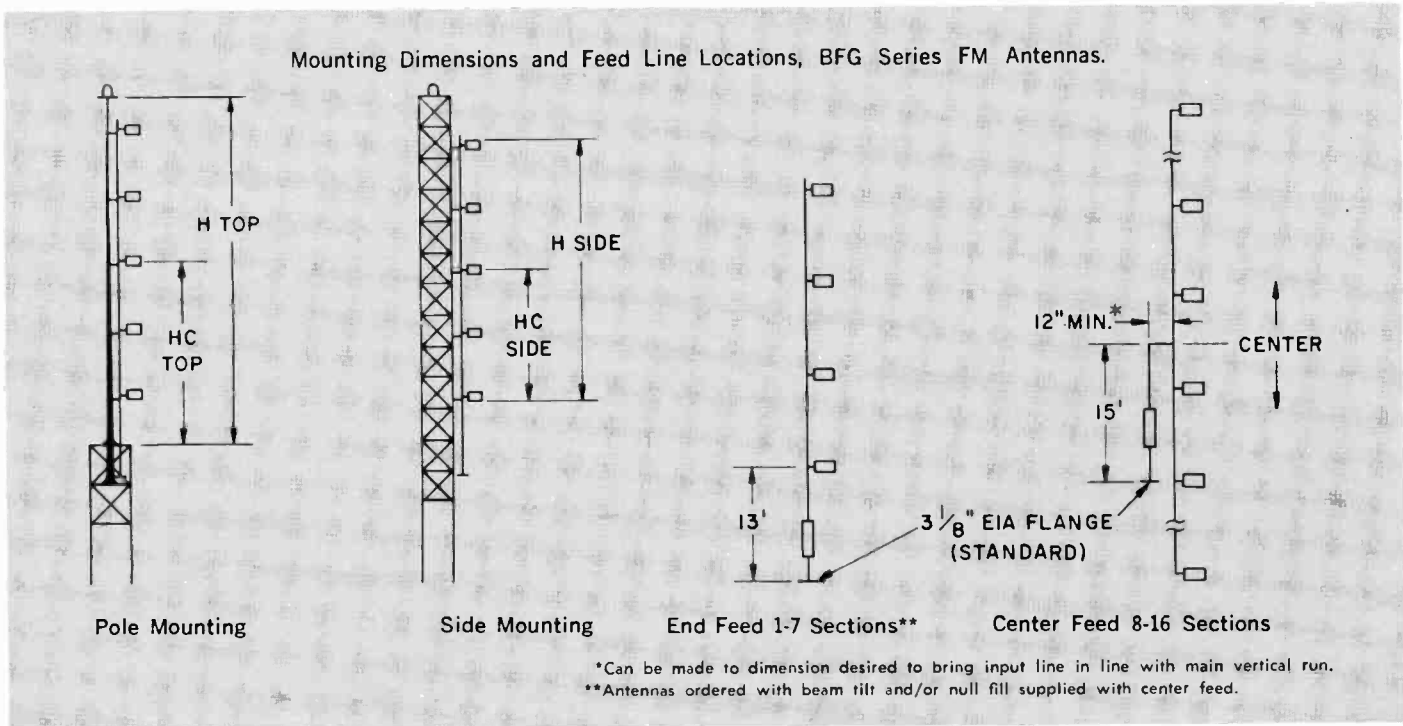

Mechanical Data, BFG Series

Antenna Type	Freq. MHz	Dimensions ¹ (See Drawing)				Windload ¹ at 50/30 lbs/ft ² (244/146 kg/m ²)								
		Hc Top Feet Meters		Hc Side Feet Meters		H Top Feet Meters		H Side Feet Meters		Less De-Icers Lbs. Kg.	With De-Icers Lbs. Kg.	With Radomes Lbs. Kg.		
BFG-1A	88	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	178	81	198	90	BFG ANTENNAS NOT AVAILABLE WITH RADOMES
	98	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	178	81	198	90	
	108	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	178	81	198	90	
BFG-2A	88	10.6	3.23	6.4	1.95	19.2	5.85	12.8	3.90	337	153	377	171	
	98	10.0	3.05	5.8	1.77	19.0	5.79	11.7	3.57	327	148	367	167	
	108	9.5	2.90	5.4	1.65	18.0	5.49	10.8	3.29	319	145	359	163	
BFG-3A	88	16.2	4.93	11.9	3.63	30.4	9.27	23.9	7.28	495	225	555	252	
	98	15.0	4.57	10.9	3.32	28.9	8.81	21.8	6.64	475	215	535	243	
	108	14.1	4.30	9.9	3.02	27.5	8.38	19.9	6.07	459	208	519	235	
BFG-4A	88	21.7	6.61	17.6	5.36	41.5	12.65	35.2	10.73	653	296	723	328	
	98	20.0	6.10	15.9	4.85	38.4	11.70	31.8	9.69	623	283	703	319	
	108	18.6	5.67	14.5	4.42	36.8	11.22	29.0	8.84	599	272	679	308	
BFG-5A	88	27.3	8.32	23.2	7.07	52.7	16.06	46.4	14.14	810	367	911	413	
	98	25.0	7.62	20.9	6.37	49.4	15.06	41.8	12.74	791	359	871	395	
	108	23.2	7.07	19.0	5.79	46.1	14.05	38.1	11.61	763	346	839	381	
BFG-6A	88	32.9	10.28	28.8	8.78	63.9	19.48	57.6	17.56	970	440	1090	494	
	98	30.0	9.14	25.4	7.74	59.3	18.07	50.9	15.51	920	417	1040	472	
	108	27.7	8.44	23.6	7.19	54.9	16.73	47.2	14.39	882	400	1000	454	
BFG-7A	88	38.5	11.73	34.3	10.45	75.0	22.86	68.7	20.94	1128	512	1268	575	
	98	35.1	10.70	30.9	9.42	68.7	20.94	61.9	18.87	1068	484	1208	548	
	108	32.3	9.85	28.1	8.56	64.2	19.57	56.3	17.16	1020	463	1160	526	
BFG-8A	88	44.0	13.41	40.0	12.19	86.2	26.27	80.0	24.38	1308	593	1468	666	
	98	40.1	12.22	35.9	10.94	78.9	24.05	71.9	21.92	1238	562	1398	634	
	108	36.8	11.22	32.7	9.97	73.2	22.31	69.4	21.15	1182	536	1342	609	
BFG-10A	88	55.2	16.82	51.1	15.58	108.6	33.10	102.2	31.15	1625	737	1875	851	
	98	50.1	15.27	46.0	14.02	98.6	30.05	92.0	28.04	1535	692	1735	787	
	108	45.9	13.99	41.8	12.74	91.2	27.80	83.7	25.51	1483	673	1663	754	
BFG-12A	88	66.4	20.24	62.3	18.99	131.0	39.92	124.7	38.01	1942	881	2182	990	
	98	60.1	18.32	56.0	17.07	119.8	36.52	112.1	34.17	1832	831	2072	1234	
	108	55.0	16.76	51.0	15.54	109.6	33.41	101.9	31.06	1744	791	1984	900	
BFG-14A	88	POLE MOUNT NOT RECOMMENDED		73.5	22.40	POLE MOUNT NOT RECOMMENDED		147.0	44.81	2258	1024	2538	1151	
	98			66.1	20.15			132.2	40.29	2128	965	2408	1092	
	108			60.0	18.29			120.1	36.61	2088	947	2304	1045	
BFG-16A	88	POLE MOUNT NOT RECOMMENDED		84.7	25.82	POLE MOUNT NOT RECOMMENDED		169.4	51.63	2575	1168	2895	1313	
	98			76.1	23.20			152.3	46.42	2425	1100	2745	1245	
	108			69.1	21.06			138.3	42.15	2205	1000	2625	1191	

¹ Interpolate dimensions and windload for antennas of intermediate frequency.

FM ANTENNAS

CIRCULARLY POLARIZED RADIATOR SPECIFICATIONS, BFG SERIES

Electrical Data

Type BFG-

Antenna Type	Power Gain ¹		Power Rating ²	
	Power	dB	kW	dBk
BFG-1	0.9	-0.45	6	7.78
BFG-2A	2.0	3.01	12	10.79
BFG-3A	3.0	4.77	18	12.55
BFG-4A	4.2	6.23	24	13.80
BFG-5A	5.4	7.32	30	14.77
BFG-6A	6.4	5.06	36	15.56
BFG-7A	7.6	8.80	40 ²	16.02
BFG-8A	8.6	9.34	40 ²	16.02
BFG-10A	11.0	10.41	40 ²	16.02
BFG-12A	13.2	11.20	40 ²	16.02
BFG-14A	15.6	11.93	40 ²	16.02
BFG-16A	17.8	12.50	40 ²	16.02

¹ Horizontal and vertical gain combined. Horizontally polarized gain may be specified at any level between 50 and 75 percent of total gain listed. Vertical power gain is then equal to the combined gain less the horizontal gain. For each polarization, the field gain is equal to the square root of the power gain. The effective field intensity at one mile (1.604 km) for 1 kW input is equal to 137.5 times the field gain.

² Power Rating based on a 40°C ambient. Multiply values listed by 0.8 for 50°C ambient. BFG-7 and larger antennas with greater power ratings are available on special order.

Weight in Pounds (kg):¹


	Less De-Icers	With De-Icers ²
Single Section	111 (50)	200 (91)
Two Sections	127 (80)	328 (149)
Three Sections	243 (110)	483 (219)
Four Sections	309 (140)	611 (277)
Five Sections	375 (170)	766 (347)
Six Sections	441 (200)	894 (406)
Seven Sections	507 (230)	1049 (476)
Eight Sections	598 (271)	1202 (545)
Ten Sections	730 (331)	1485 (674)
Twelve Sections	862 (391)	1768 (802)
Fourteen Sections	994 (451)	2051 (930)
Sixteen Sections	1126 (511)	2334 (1059)

¹ Weight includes feed system to antenna input and 13- to 18-inch (330 to 457mm) extension brackets for mounting.

² De-Icer power: 750 watts per bay, nominal. May be wired for 208 or 240 V service.

CIRCULARLY POLARIZED RADIATOR SPECIFICATIONS, BFI SERIES

Mechanical Data, BFI Series

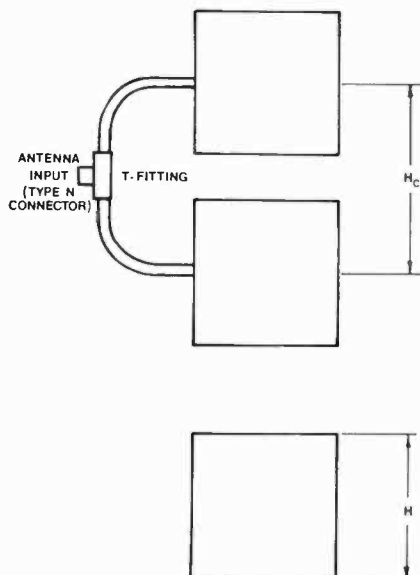

Antenna Type	Freq. MHz	Dimensions (See Drawing)				Windload at 50/30 lbs/ft ² (244/146/kg ²)	
		Hc Side		H Side		Less De-Icers	
		Feet	Meters	Feet	Meters	Lbs.	Kg.
BFI-1C	88	0.8	0.24	1.25	0.52	32	15
	98	0.8	0.24	1.25	0.52	32	15
	108	0.8	0.24	1.25	0.52	32	15
BFI-2C	88	6.4	1.95	12.8	3.90	69	31
	98	5.8	1.77	11.7	3.57	69	31
	108	5.4	1.65	10.8	3.29	69	31
BFI-1H	88	0.8	0.24	1.25	0.52	32	15
	98	0.8	0.24	1.25	0.52	32	15
	108	0.8	0.24	1.25	0.52	32	15
BFI-2H	88	6.4	1.95	12.8	3.90	69	31
	98	5.8	1.77	11.7	3.57	69	31
	108	5.4	1.65	10.8	3.29	69	31

Electrical Data

Antenna Type	Power Gain			Field Intensity ¹	Power Rating	
	Power	dB	Field		kW	dBk
BFI-1C	0.46	-3.37	0.68	93.2	0.5	-3
BFI-2C	1.00	0	1.00	137.5	0.5	-3
BFI-1H	0.90	-0.45	0.95	130.0	0.5	-3
BFI-2H	1.90	3.01	1.41	194.0	0.5	-3

¹ For each polarization, the field gain is equal to the square root of the power gain. The effective field intensity in mV/m at one mile (1.604 km) for 1kW input is equal to 137.5 times the field gain.

FM ANTENNAS

CIRCULARLY POLARIZED RADIATOR SPECIFICATIONS, BFH SERIES


Mounting Dimensions and Feed Line Locations,
BFH Series FM Antennas.

Electrical Data

Antenna Type	Power Gain ¹			Field Intensity ²	Power Rating	
	Power	dB	Field		kW	dBk
BFH-1	0.46	-3.37	0.678	93.2	2	3.01
BFH-2	1.0	0	1.00	137.5	4	6.02
BFH-3	1.5	1.76	1.23	168.4	6	7.78
BFH-4	2.1	3.22	1.45	199.2	8	9.03
BFH-5	2.7	4.31	1.64	225.2	8	9.03
BFH-6	3.2	5.05	1.79	246.0	8	9.03
BFH-7	3.8	5.80	1.95	268.0	8	9.03
BFH-8	4.3	6.34	2.07	285.2	8	9.03

¹Power gain in each polarization.

²For each polarization, the field gain is equal to the square root of the power gain. The effective field intensity in mV/m at one mile (1.604 km) for 1 kW input is equal to 137.5 times the field gain.

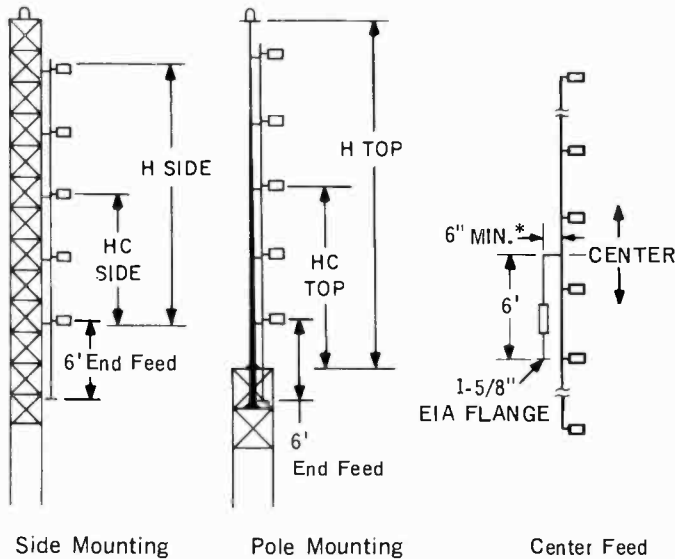

Weight in Pounds (Kg):	Less De-icers	With De-icers ²	With Radomes
Single Section	42 (19)	130 (59)	57 (26)
Two Sections	89 (40)	238 (108)	119 (54)
Three Sections	136 (62)	373 (160)	181 (82)
Four Sections	183 (83)	481 (218)	243 (110)
Five Sections	230 (104)	616 (279)	305 (138)
Six Sections	277 (126)	724 (328)	367 (167)
Seven Sections	324 (147)	859 (390)	429 (195)
Eight Sections	371 (168)	967 (439)	491 (223)

*Can be made to dimension desired to bring input line in line with main vertical run.

¹Weight includes elements, feed system to antenna input and 13- to 18-inch (330- to 457mm) extension brackets for mounting.

Mechanical Data, BFH Series

Antenna Type	Freq. MHz	Dimensions ¹ (See Drawing)								Windload ¹ at 50/30 lbs/ft ² (244/146/kg ²)			
		Hc Top Feet Meters		Hc Side Feet Meters		H Top Feet Meters		H Side Feet Meters		Less De-Icers Lbs. Kg.		With De-Icers ² Lbs. Kg.	
BFH-1	88	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	116	53	139	63
	98	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	116	53	139	63
	108	5.0	1.52	0.8	0.24	8.0	2.44	1.7	0.52	116	53	139	63
BFH-2	88	10.6	3.23	6.4	1.95	19.2	5.85	12.8	3.90	220	100	264	120
	98	10.0	3.05	5.8	1.77	19.0	5.79	11.7	3.57	213	97	257	117
	108	9.5	2.90	5.4	1.65	18.0	5.49	10.8	3.29	208	94	252	114
BFH-3	88	16.2	4.93	11.9	3.63	30.4	9.27	23.9	7.28	322	146	389	176
	98	15.0	4.57	10.9	3.32	28.9	8.81	21.8	6.64	309	140	375	170
	108	14.1	4.30	9.9	3.02	27.5	8.38	19.9	6.07	299	136	364	165
BFH-4	88	21.7	6.61	17.6	5.36	41.5	12.65	35.2	10.73	425	193	507	259
	98	20.0	6.10	15.9	4.85	38.4	11.70	31.8	9.69	405	184	493	224
	108	18.6	5.67	14.5	4.42	36.8	11.22	29.0	8.84	390	177	476	216
BFH-5	88	27.3	8.32	23.2	7.07	52.7	16.06	46.4	14.14	527	239	638	289
	98	25.0	7.62	20.9	6.37	49.4	15.06	41.8	12.74	515	234	610	277
	108	23.2	7.07	19.0	5.79	46.1	14.05	37.1	11.61	496	225	588	267
BFH-6	88	32.9	10.28	28.8	8.78	63.9	19.48	57.6	17.50	631	286	763	346
	98	30.0	9.14	25.4	7.74	59.3	18.07	51.9	15.51	599	272	728	330
	108	27.7	8.44	23.6	7.19	54.9	16.73	47.2	14.39	574	260	700	318
BFH-7	88	38.5	11.73	34.3	10.45	75.0	22.86	68.7	20.94	734	333	888	403
	98	35.1	10.70	30.9	9.42	68.7	20.94	61.9	18.87	695	315	846	384
	108	32.3	9.85	28.1	8.56	64.2	19.57	56.3	17.16	663	301	812	368
BFH-8	88	44.0	13.41	40.0	12.19	86.2	26.27	80.0	24.38	851	386	1028	466
	98	40.1	12.22	35.9	10.94	78.9	24.05	71.9	21.92	805	365	979	445
	108	36.8	11.22	32.7	9.97	73.2	22.31	65.4	21.15	769	349	940	426

¹Interpolate dimensions and windload for antennas of intermediate frequencies.

²De-icer power: 750 watt per bay, nominal. May be wired for 208 or 240 V service.

FM ANTENNAS

CIRCULARLY POLARIZED PANEL RADIATORS SPECIFICATIONS, BFB SERIES

ELECTRICAL SPECIFICATIONS								MECHANICAL SPECIFICATIONS									
Antenna Type	GAIN						Field Intensity ¹	Approx. Array Height ²		Windload at 50/33 PSF ²				Weight ²			
	Horizontal			Vertical				FT	M	Without Radome(s)		With Radome(s)		Without Radome(s)		With Radome(s)	
	Power	dB	Field	Power	dB	Field				LBS	KG	LBS	KG	LBS	KG	LBS	KG
BFB-1	0.46	-3.37	0.678	0.46	3.37	0.678	93.2	8	2.44	1425	647	1730	785	800	363	850	386
BFB-2	1.0	0	1.0	1.0	0	1.0	137.5	18	5.49	2835	1287	3445	1564	1500	621	1600	727
BFB-3	1.5	1.76	1.23	1.5	1.76	1.23	169.1	28	8.53	4240	1925	5155	2340	2300	1044	2450	1114
BFB-4	2.1	3.22	1.45	2.1	3.22	1.45	199.4	38	11.6	5725	2599	6945	3153	3200	1453	3400	1545
BFB-5	2.7	4.31	1.64	2.7	4.31	1.64	225.5	48	14.6	7640	3469	9160	4159	4000	1816	4250	1932
BFB-6	3.3	5.19	1.82	3.3	5.19	1.82	250.2	58	17.7	8655	3929	10485	4760	4700	2134	5000	2273
BFB-7	3.9	5.91	1.97	3.9	5.91	1.97	270.9	68	20.7	10745	4878	12880	5848	5600	2542	5950	2705
BFB-8	4.4	6.43	2.10	4.4	6.43	2.10	288.8	78	23.8	11990	5443	14430	6551	6400	2906	6800	3091
BFB-10	5.5	7.40	2.35	5.5	7.40	2.35	323.1	98	29.9	15600	7082	18650	8467	8000	3632	8500	3864
BFB-12	6.6	8.20	2.57	6.6	8.20	2.57	353.4	118	35.9	18560	8426	22220	10088	9500	4313	10100	4591
BFB-14	7.7	8.86	2.77	7.7	8.86	2.77	380.9	138	42.1	23430	10637	27700	12576	12000	5448	12700	5773
BFB-16	8.8	9.44	2.97	8.8	9.44	2.97	408.4	158	48.2	27110	12308	31990	14523	14200	6446	15000	6818

¹ For each polarization, the field gain is equal to the square root of the power gain. The effective field intensity in mV/m at one mile (1.604 km) for 1 kW input is equal to 137.5 times the field gain.

² Weights and wind loads are estimated for three panels per layer on a triangular cross section tower. Other factors could increase or decrease estimate. Please verify weight and windloads data with your RCA Representative.

³ See illustration, next page.

Accommodates Split-Feed System

The BFB- antenna is designed to operate with a single 3-1/8, 4-1/16 or 6-1/8-inch coaxial transmission line between array input and transmitter. However, the array may be arranged to operate from two transmission lines from the transmitter so that, in the event of failure of some array component, the inoperable section can be switched out of service and operation continued, with circular polarization, from the other "half" of the array at reduced ERP until the outage is corrected. See block diagram, next page.

Power Rating Considerations

Two factors determine the power rating of a BFB- antenna array: each panel in an array has a 5 kW (rms) power-input limitation and an "equivalent peak-power" (EPP) rating of 22 kW. EPP is expressed as:

$$EPP = (\sqrt{P_1} + \sqrt{P_2} + \sqrt{P_3} \dots)^2$$

where $P_1, P_2, P_3 \dots$ is the power (in watts) of each station sharing the array. For situations where all sharing stations have equal power EPP is expressed as:

$$EPP = n^2P$$

where n is the number of stations sharing and P the power of each station.

To illustrate, assume a 12-layer array with three panels per layer or 36 panels with a power gain of 6.6 and a per-panel EPP of 22 kW Array:

$$EPP = (36) (22) = 792 \text{ kW.}$$

Thus, a 36-panel array is rated at 792 kW EPP. The equivalent peak power of seven 100-kW ERP stations, each with 15.2 kW (100/6.6) into the array is:

$$\text{Array EPP} = 7^2 (15.2) = 745 \text{ kW.}$$

Therefore, a 12-layer, 36-panel array can handle seven 100-kW ERP stations, each with 15.2 kW of transmitter power. The rms power per panel is:

$$P = 7(15.2)/36 = 2.96 \text{ kW per panel.}$$




Since the individual panel rating is 5 kW, 2.96 kW per panel is well within rating.

Specifications

Frequency Range88-108 MHz
 Panel Bandwidth (Adjustable)6 MHz
 Power Input Rating (per panel)5 kW rms; 22 kW EPP


FM ANTENNAS

HORIZONTAL RADIATION PATTERNS, BFB ANTENNA MOUNTED ON 10 FT. FACE OF TRIANGULAR TOWER

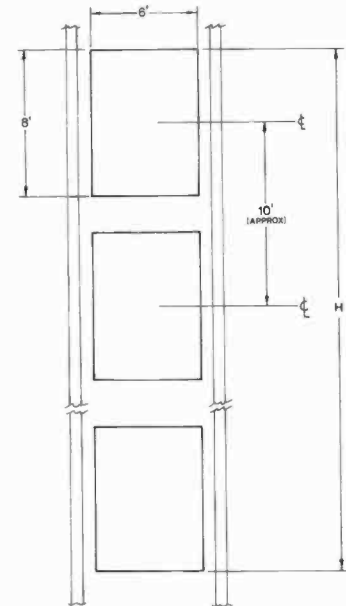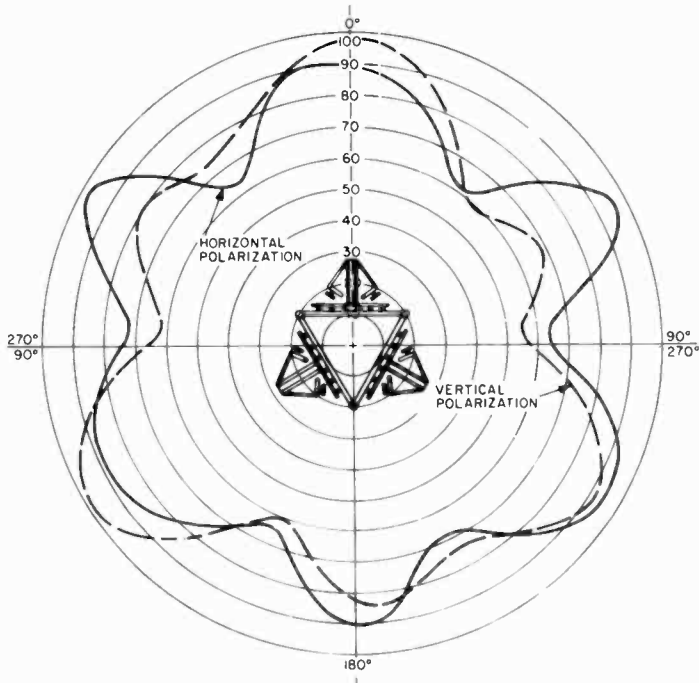


CENTER OF RADIATION AT PHYSICAL CENTER OF ANTENNA

SPLIT FEED SYSTEM

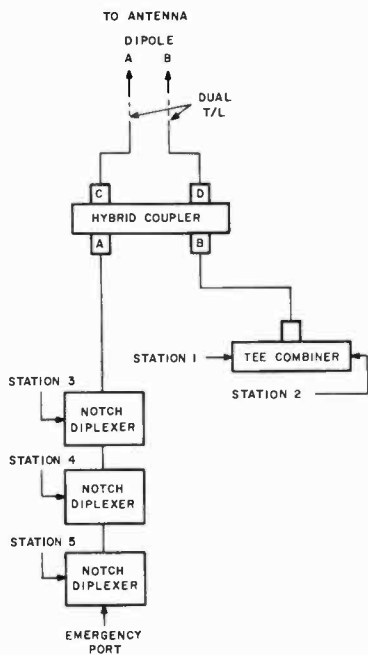

VERTICAL RADIATION PATTERNS, BFC SERIES

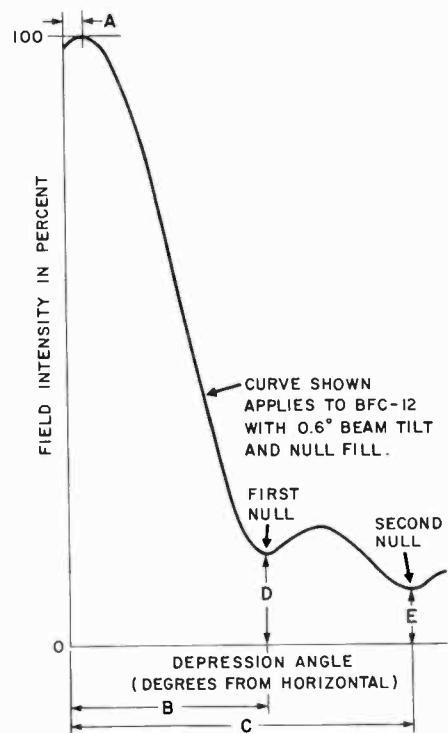

Above drawing to be used with tabulation on next page.

Typical five-station shared-antenna scheme for FM-broadcast stations using a Type BFB- Panel Antenna.

FM ANTENNAS

VERTICAL RADIATION PATTERNS, BFC SERIES

Antenna Type*	No. of Sections	Pattern Number	Power Gain**	Beam Tilt A°	B°	C°	1st Null D%	2nd Null E%
BFC-1B	1	61667-DRW	.46	0	84	—	5.0	—
BFC-2B	2	61667-ERW	1.0	0	30	—	0	—
BFC-3B	3	3-0-0	1.5	0	19.5	41.5	0	0
BFC-4B	4	61667-FRW	2.1	0	14.5	30.0	0	0
BFC-4B	4	4-0-10	2.1	0	14.5	30.0	10.0	0
BFC-4B	4	4-0-15	2.0	0	14.3	30.0	15.0	0
BFC-4B	4	4-1-10	2.0	1	15.7	30.0	10.0	2.0
BFC-5B	5	5-0-0	2.7	0	11.5	37.0	0	0
BFC-6B	6	6-0-0	3.2	0	9.6	19.5	0	0
BFC-6B	6	6-0-10	3.1	0	9.6	19.0	10.0	5.0
BFC-6B	6	6-0-12.5	3.14	0	9.8	19.0	12.0	6.0
BFC-6B	6	6-0-15	2.95	0	9.7	19.0	15.0	7.5
BFC-6B	6	6-05-11-5	3.1	0.5	10.3	19.0	11.0	4.5
BFC-6B	6	6-1-12-4	3.1	1.0	11.0	19.0	12.0	4.0
BFC-7B	7	7-0-0	3.8	0	8.2	16.5	0	0
BFC-8B	8	8-0-0	4.3	0	7.2	14.5	0	0
BFC-8B	8	8-0-5	4.3	0	7.2	14.5	5.0	3.0
BFC-8B	8	8-0-10	4.1	0	7.3	14.5	10.0	7.5
BFC-8B	8	8-0-15.5-11	3.95	0	7.5	14.0	15.0	11.0
BFC-8B	8	8-0-5-00	4.28	0.5	8.0	14.5	0	0
BFC-8B	8	8-0.75-00	4.22	0.75	8.2	14.5	0	0
BFC-8B	8	8-1.0-00	4.18	1.0	8.6	14.5	0	0
BFC-8B	8	8-0.5-10-6	4.1	0.5	7.9	14.5	10.0	6.0
BFC-8B	8	8-0.75-10-5.5	4.1	0.75	8.3	14.5	10.0	5.5
BFC-8B	8	8-1.0-10	4.1	1.0	8.6	—	10.0	—
BFC-8B	8	8-1.0-15	3.9	1.0	9.0	14.0	15.0	6.5
BFC-10B	10	10-0-0	5.5	0	5.8	11.5	0	0
BFC-10B	10	10-0-10-8.5-5.5	5.19	0	6.0	11.5	10.0	8.5
BFC-10B	10	10-0.5-0	5.44	0.5	6.4	11.5	0	0
BFC-10B	10	10-0.75-0	5.36	0.75	6.8	11.5	0	0
BFC-10B	10	10-1.0-0	5.26	1.0	7.1	11.5	0	0
BFC-10B	10	10-0.5-10-7	5.21	0.5	6.6	11.5	10.0	7.0
BFC-12B	12	12-0-0	6.6	0	4.8	9.6	0	0
BFC-12B	12	12-0-10-4	6.37	0	4.9	9.5	10.5	5.0
BFC-12B	12	12-0.5-0	6.48	0.5	5.5	9.5	0	0
BFC-12B	12	12-0.75-0	6.36	0.75	5.8	9.6	0	0
BFC-12B	12	12-1-0	6.19	1.0	6.1	9.6	0	0
BFC-12B	12	12-0.3-6-5	6.50	0.3	5.1	9.7	6.5	0
BFC-12B	12	12-0.4-20-6	5.7	0.4	5.5	9.3	20.0	6.0
BFC-12B	12	12-0.5-11-6-4	6.3	0.5	5.4	10.0	11.0	6.5
BFC-12B	12	12-0.6-15-9	5.93	0.6	5.8	10.0	15.0	9.0
BFC-12B	12	12-1-10	6.0	1.0	6.2	9.6	10.0	0
BFC-12B	12	12-1-13-6-5-7	6.0	1.0	6.3	9.9	13.0	6.5
BFC-12B	12	12-1-17-9-9	5.78	1.0	6.5	10.0	16.5	8.5
BFC-12B	12	12-1.5-12	5.53	1.5	7.3	9.8	12.0	0
BFC-14B	14	14-0-0	7.8	0	4.1	8.2	0	0
BFC-14B	14	14-0-10-6	7.52	0	4.2	8.2	10.0	6.0
BFC-14B	14	14-0-15	7.1	0	4.2	8.0	15.5	9.0
BFC-14B	14	14-0.5-0	7.64	0.5	4.7	8.2	0	0
BFC-14B	14	14-0.75-0	7.45	0.75	5.0	8.2	0	0
BFC-14B	14	14-1.0-0	7.19	1.0	5.5	8.2	0	0
BFC-14B	14	14-0.5-15	7.3	0.5	4.8	8.2	15.0	2.5
BFC-14B	14	14-0.5-20	6.35	0.5	5.2	7.9	20.0	7.5
BFC-14B	14	14-0.75-14	7.1	0.75	5.3	8.0	14.0	3.5
BFC-14B	14	14-1-10-6	7.2	1.0	5.4	8.4	10.0	6.0
BFC-16B	16	16-0-0	8.9	0	3.6	7.2	0	0
BFC-16B	16	16-0-10-7-3	8.46	0	3.6	7.1	10.5	7.0
BFC-16B	16	16-0-15-10-4	8.25	0	3.7	7.0	15.0	10.0
BFC-16B	16	16-0.25-0	8.85	0.25	4.0	7.1	2.0	2.0
BFC-16B	16	16-0.5-0	8.69	0.5	4.2	7.0	0	0
BFC-16B	16	16-0.75-0	8.41	0.75	4.6	7.2	0	0
BFC-16B	16	16-1.0-0	8.09	1.0	4.8	7.2	0	0
BFC-16B	16	16-0.75-15-3	8.1	0.75	4.7	7.1	15.0	3.0
BFC-16B	16	16-0.75-29	7.3	0.75	4.4	7.6	29.0	8.5


For definition, see vertical radiation pattern on preceding page.

*Patterns listed apply to BFB, BFC, BFG, BFH and BFI antennas.
 **Gain of main lobe.


FM ANTENNAS

VERTICAL RADIATION PATTERNS, BFC SERIES


BFC-4 Pattern Number 61667-FRW

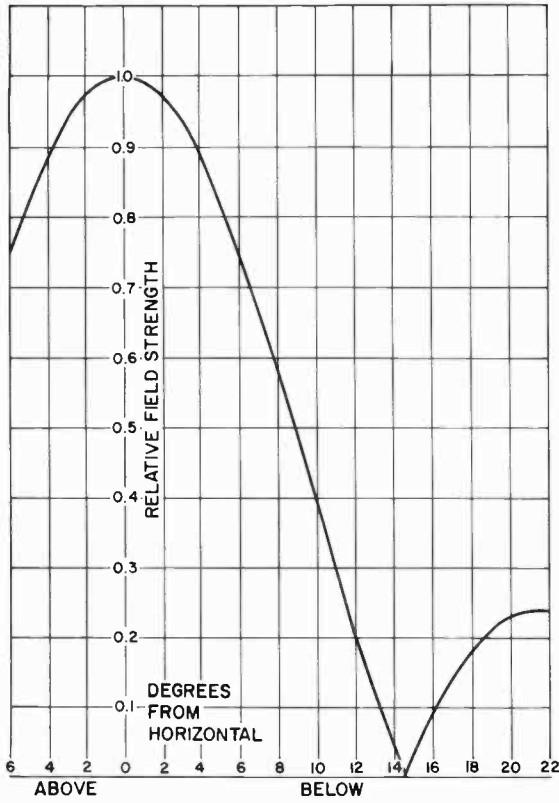


BFC-6 Pattern Number 6-0-0

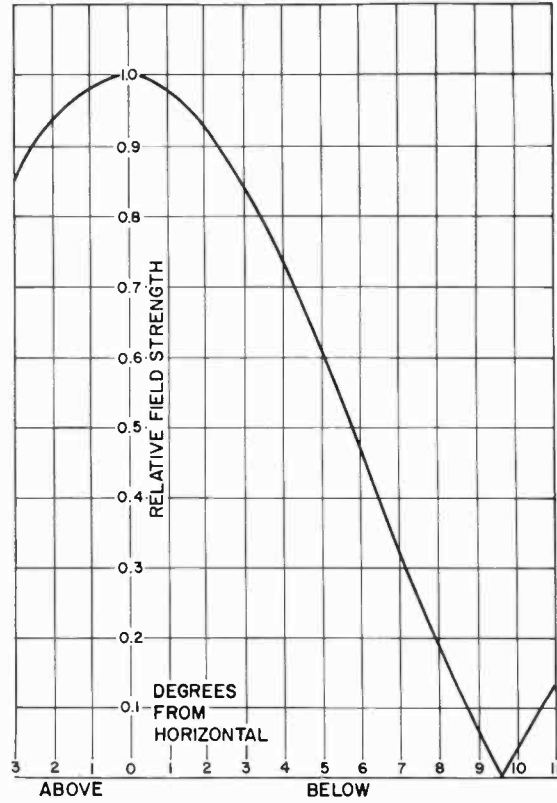

BFC-6B Pattern Number 6-0-10

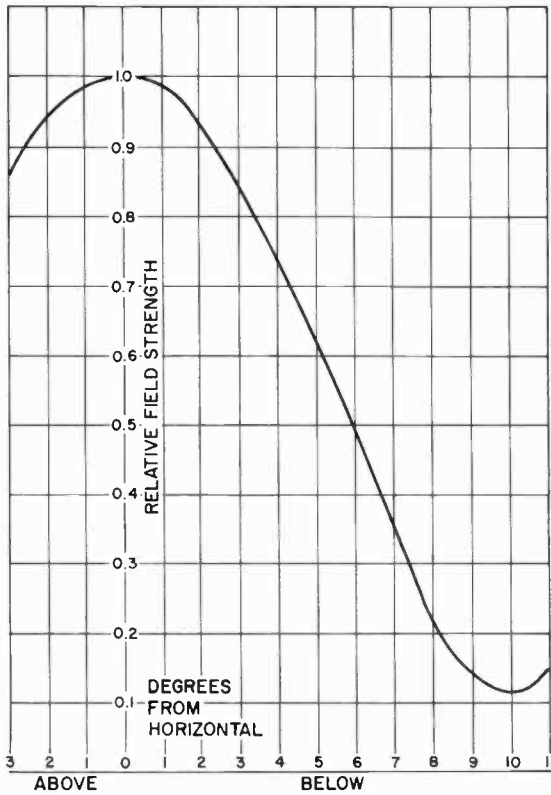


BFC-6B Pattern Number 6-1-12-4

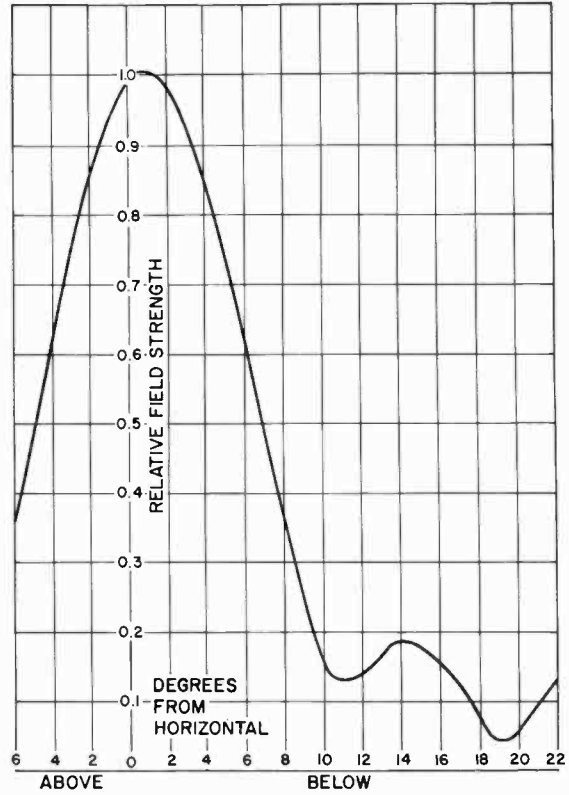


FM ANTENNAS

VERTICAL RADIATION PATTERNS, BFC SERIES


BFC-8 Pattern Number 8-1-15

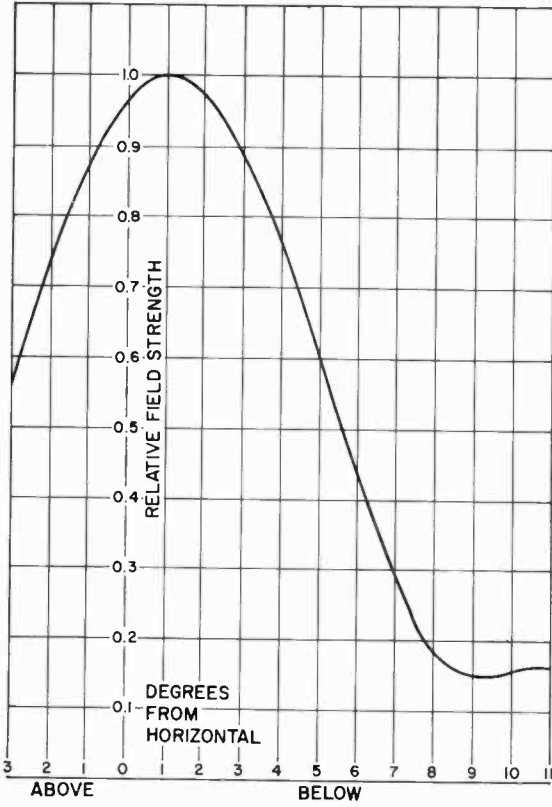


BFC-8B Pattern Number 8-0-10

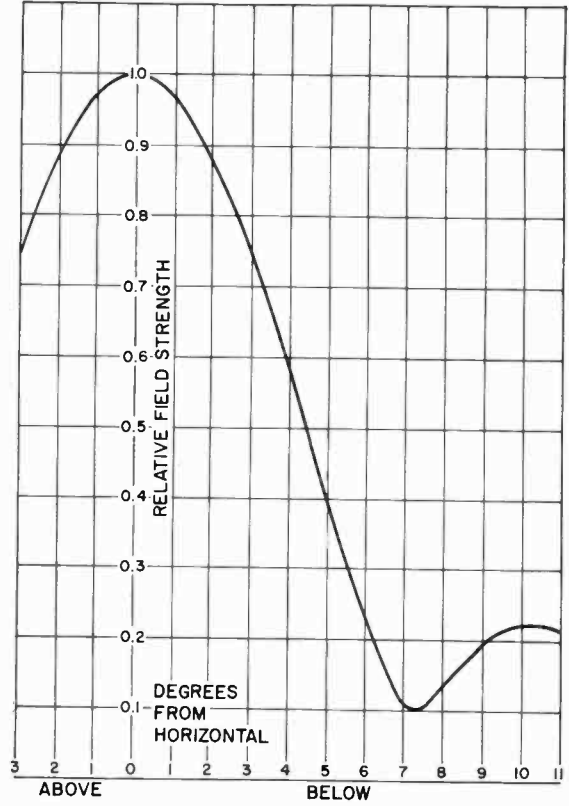

BFC-10 Pattern Number 10-0-0

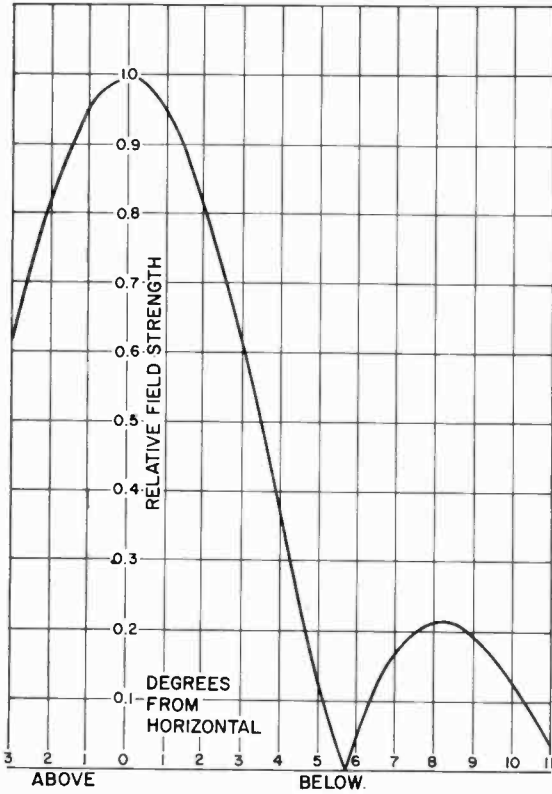


BFC-12 Pattern Number 12-0-10-4

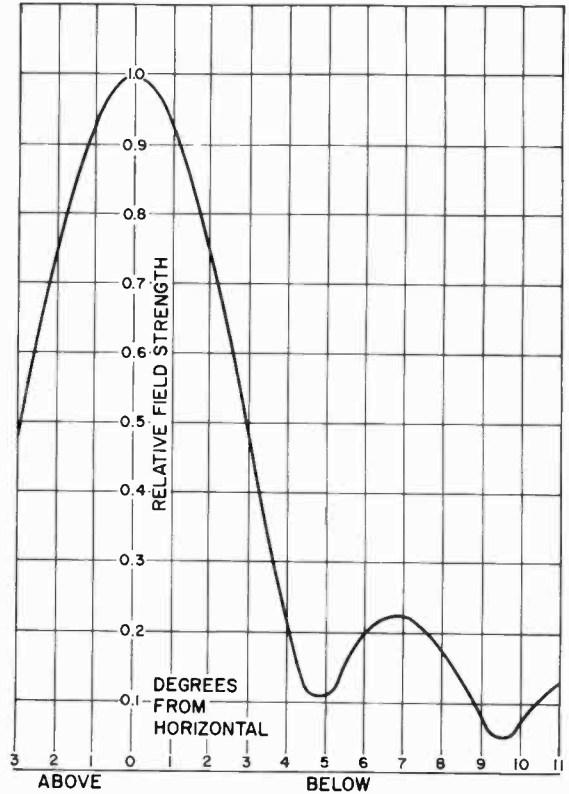


FM ANTENNAS

VERTICAL RADIATION PATTERNS, BFC SERIES


BFC-12 Pattern Number 12-1-0

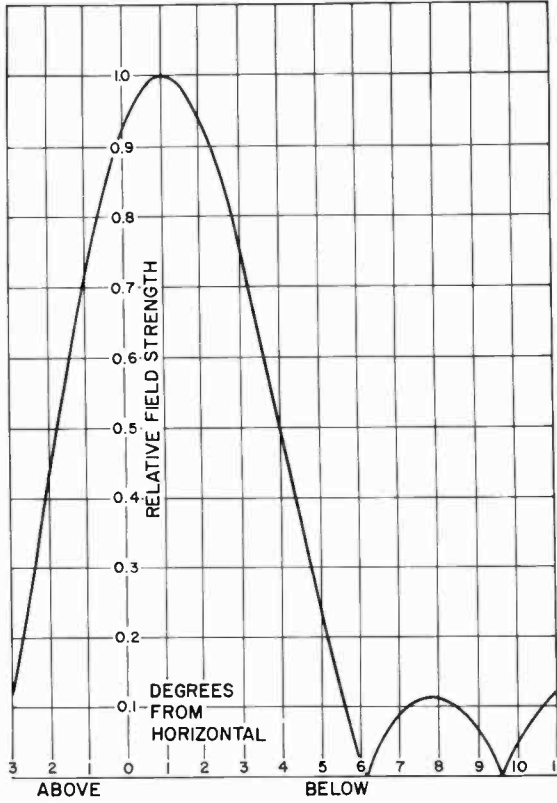


BFC-14 Pattern Number 14-0-18-10

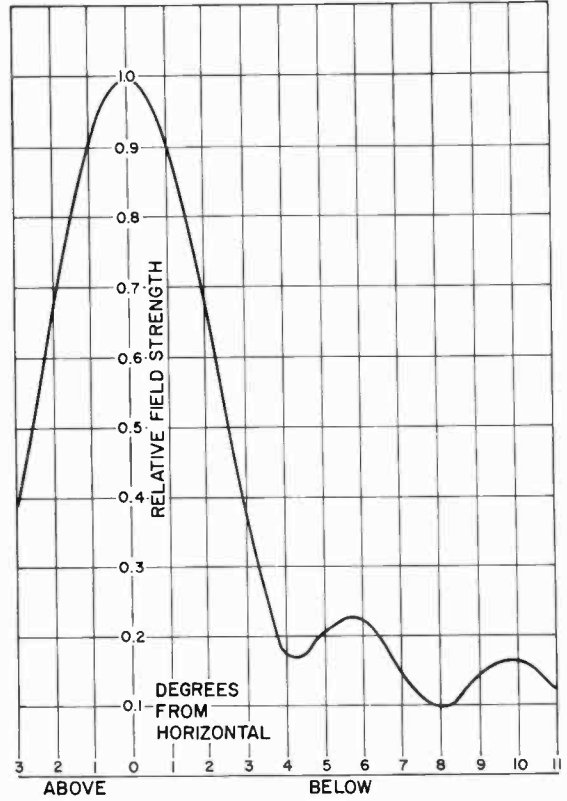

BFC-16 Pattern Number 16-0-0.5-0

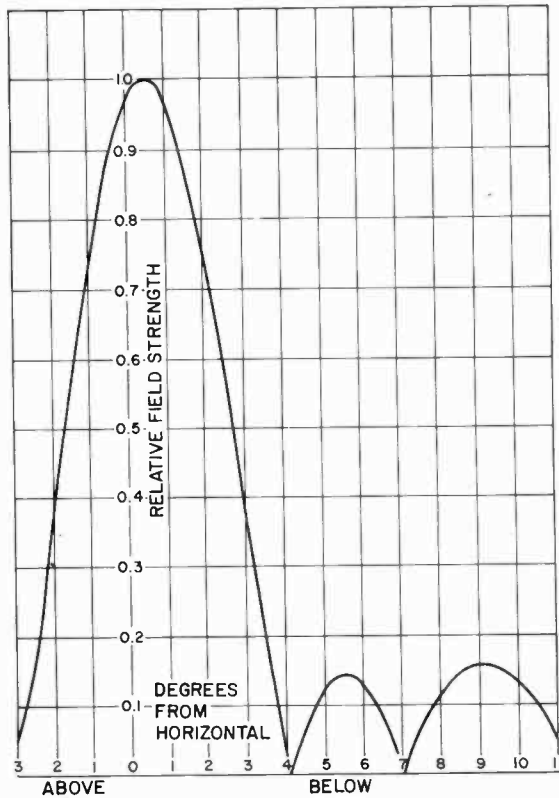


BFC-16 Pattern Number 16-0.75-15-3

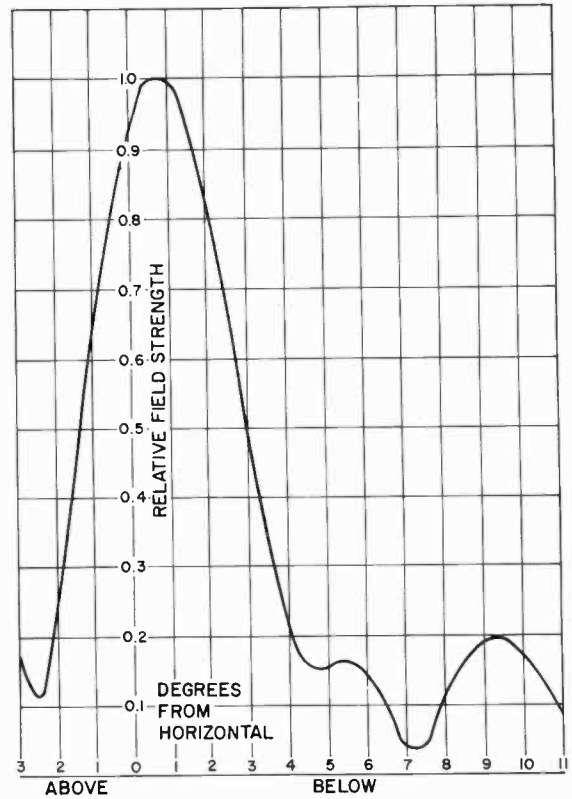

FM ANTENNAS

AM/FM ISOLATION UNIT

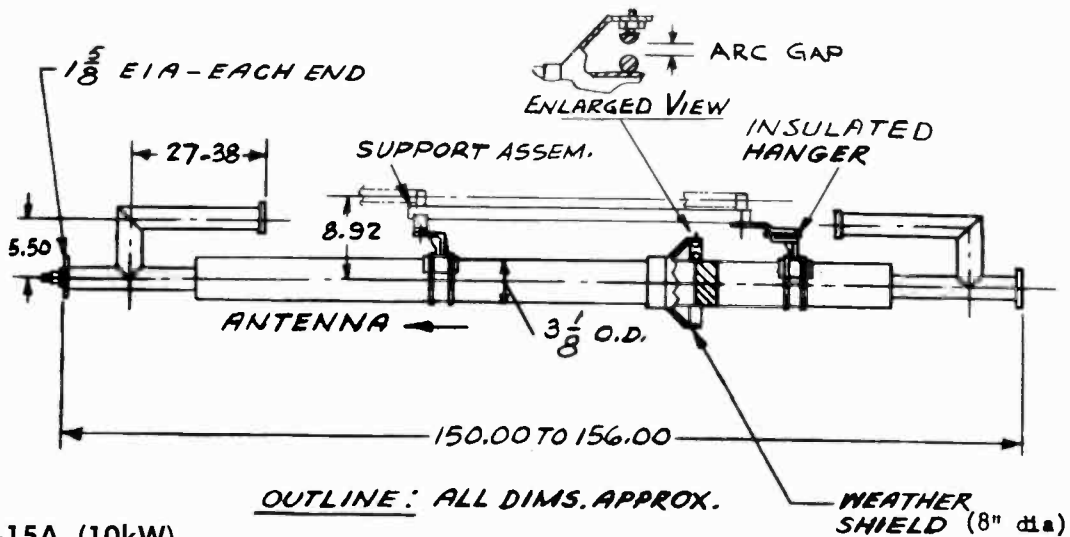

Type BAF-15A (10kW)

Mechanical Specifications

Mounting	Vertical
Maximum Gas Pressure for Pressurizing	30 PSIG
Weight (approx.)	55 lbs.
Connectors	Coaxial Line (1 3/8 inch) EIA


Accessory

Adapter required to connect to MI-19112 line	MI-19112-62
--	-------------

Electrical Specifications

Frequency Range	88-108 MHz
Impedance	50 ohms

VSWR	1.08 or better
Maximum Power FM	10 kW
Maximum Tower Base Voltage AM	10 kV Peak
Internal Capacitance at AM	130 PF
Insertion Loss	0.1 dB max.
2nd Harmonic Rejection	70 dB
4th Harmonic Rejection	50 dB
6th Harmonic Rejection	30 dB
Arc Gap Setting at Factory	0.08 inches

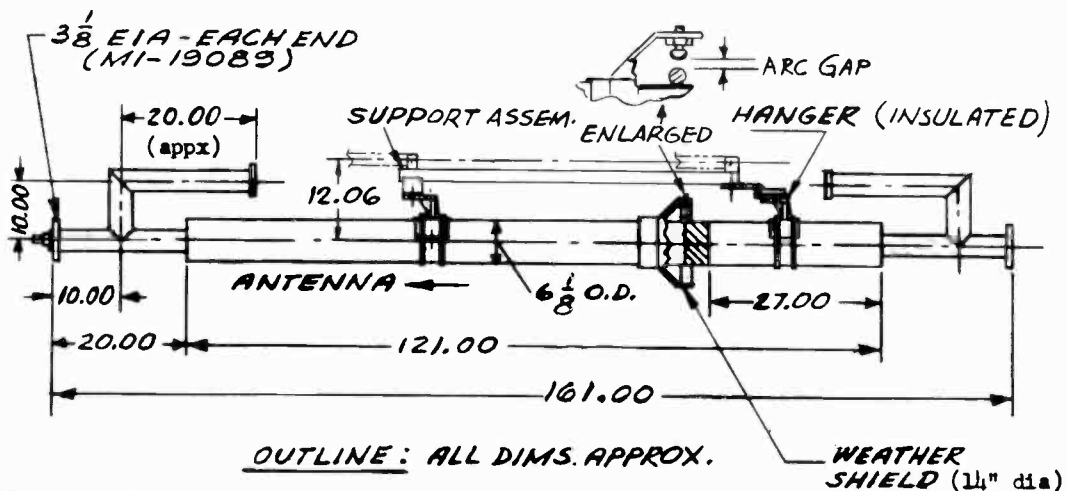

Type BAF-16A (40 kW)

Mechanical Specifications

Mounting	Vertical
Maximum Gas Pressure for Pressurizing	12 PSIG
Weight (approx.)	100 lbs.
Connectors	Coaxial Line (3 3/8 inch) EIA



Electrical Specifications

Frequency Range	88-108 MHz
Impedance	50 ohms
VSWR	1.08 or better

Maximum Power FM	40 kW
Maximum Tower Base Voltage AM	14 kV Peak
Internal Capacitance at AM	130 PF
Insertion Loss	0.1 dB max.
2nd Harmonic Rejection	80 dB
4th Harmonic Rejection	60 dB
6th Harmonic Rejection	40 dB
Arc Gap Setting at Factory	0.08 inches

FM ANTENNAS

DE-ICER CABLES AND POWER, BFC, BFG, BFH SERIES

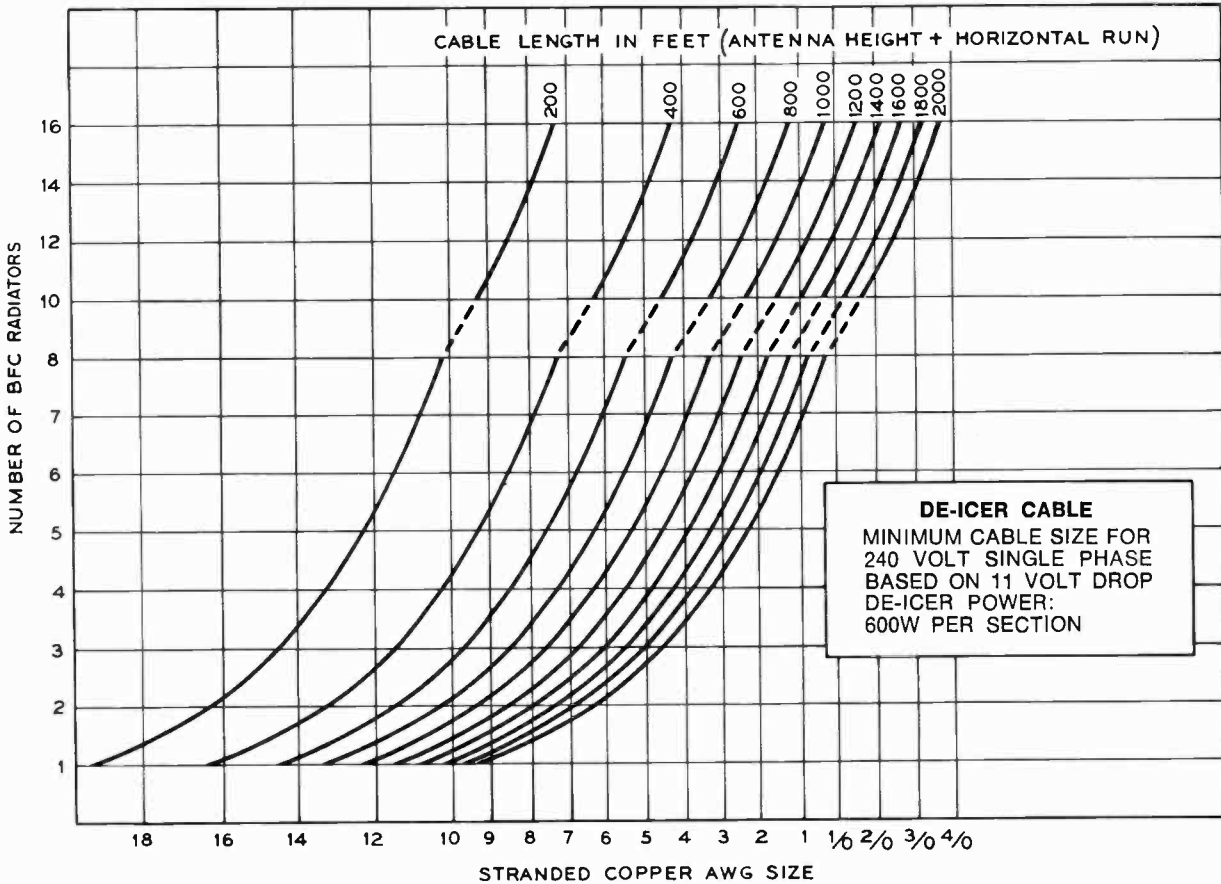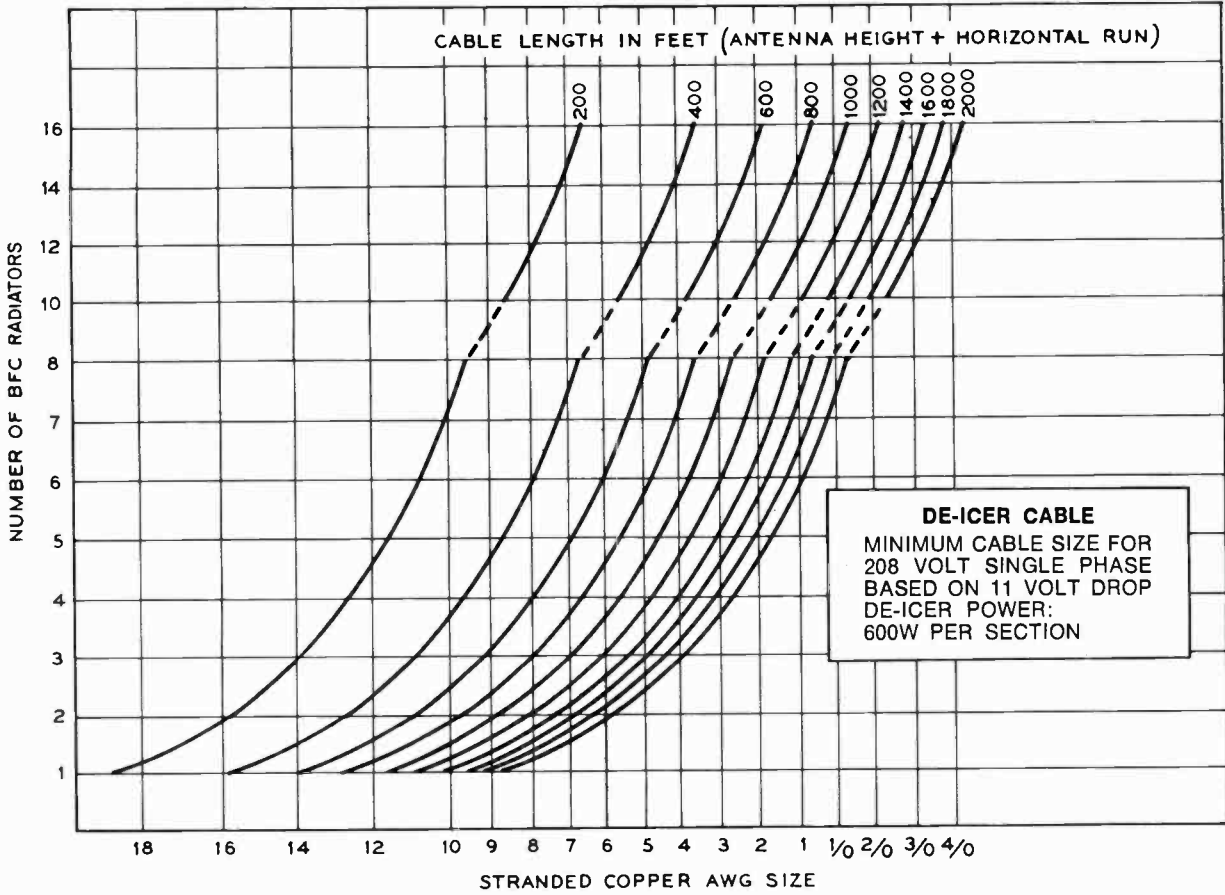

COAXIAL TRANSMISSION LINE

COAXIAL LINE TYPES AND SPECIFICATIONS

Nominal Diameter	Recommended Service	Coupling Device	Pressure Tight	Power Rating 1 MHz ¹	Rating 100 MHz	Efficiency	Weight per 100 Ft Lbs/kg	Type Number	Catalog Reference ²
RIGID 50-OHM IMPEDANCE—TEFLON INSULATED									
1 5/8"	FM, VHF-TV	Unflanged	No	28.5			115/52	MI-561565	RA.5011
3 1/8"	AM, FM, TV	Universal	Yes	94			280/127	MI-27791D	RA.5011
3 1/8"	AM, FM, VHF-TV	Unflanged	No	94			230/104	MI-27791K	RA.5011
3 1/8"	FM, TV	Bolt Flange	Yes	94			270/122	MI-19089	TR.2301
6 1/8"	FM, VHF-TV	Unflanged	No				625/284	MI-561579	RA.5011
4-1/16"	FM, TV	Universal	Yes					MI-561673E	
4-1/16"	FM, VHF-TV	Unflanged	No					MI-561673K	

RIGID 51.5 OHM IMPEDANCE—STEATITE AND TEFLON INSULATED									
1 5/8"	AM, FM	Bolt Flange	Yes	25			125/57	MI-19112	TR.2401
1 5/8"	AM, FM	Unflanged	No	25			120/54	MI-19112	TR.2401
3 1/8"	AM, FM, VHF-TV	Bolt Flange	Yes	94			250/113	MI-19113C	RA.5011
3 1/8"	AM, FM	Unflanged	No	94			265/120	MI-19113C	RA.5011
3 1/8"	AM, FM, VHF-TV*	Bolt Flange*	Yes*	92			255/115*	MI-19313C*	RA.5011
3 1/8"	AM, FM, VHF-TV*	Unflanged*	No*	92			240/109*	MI-19313C*	RA.5011
6 1/8"	AM, FM, VHF-TV	Bolt Flange	Yes	288			730/331	MI-19314C	TR.2401
6 1/8"	AM, FM, VHF-TV	Unflanged	No	288			695/316	MI-19314C	TR.2401

*Teflon insulated.


SEMI-RIGID 50-OHM IMPEDANCE—POLYETHYLENE INSULATED									
1/2"	AM, FM	Continuous ³	Yes	10.0			27/12	HJ4-50	RA.5011
7/8"	AM, FM	Continuous ³	Yes	44.0			53/24	HJ5-50	RA.5011
1 5/8"	AM, FM	Continuous ³	Yes	145.0			104/47	HJ7-50	RA.5011
3"	AM, FM	Continuous ³	Yes	320.0			178/81	HJ8-50	RA.5011
5"	AM, FM	Continuous ³	Yes	830.0			330/150	HJ9-50	RA.5011

SEMI-RIGID 50-OHM IMPEDANCE—FOAM INSULATED									
1/4"	AM, FM	Continuous ³	No	5.0			7/3	FHJ1-50	RA.5011
3/8"	AM, FM	Continuous ³	No	8.0			12/5	FHJ2-50	RA.5011
1/2"	AM, FM	Continuous ³	No	19.0			18/8	FHJ4-50	RA.5011
7/8"	AM, FM	Continuous ³	No	44.0			44/20	FHJ5-50	RA.5011
1 5/8"	AM, FM	Continuous ³	No	145.0			130/59	FHJ7-50	RA.5011

¹In kW at 100% modulation, unity VSWR.
²Available at any RCA Broadcast Field Office or Transmission Line Marketing, RCA Bldg. 2-2, Camden, N. J. 08102.
³Attachable connectors available.


COAXIAL TRANSMISSION LINE

RIGID COAXIAL LINE SPECIFICATIONS

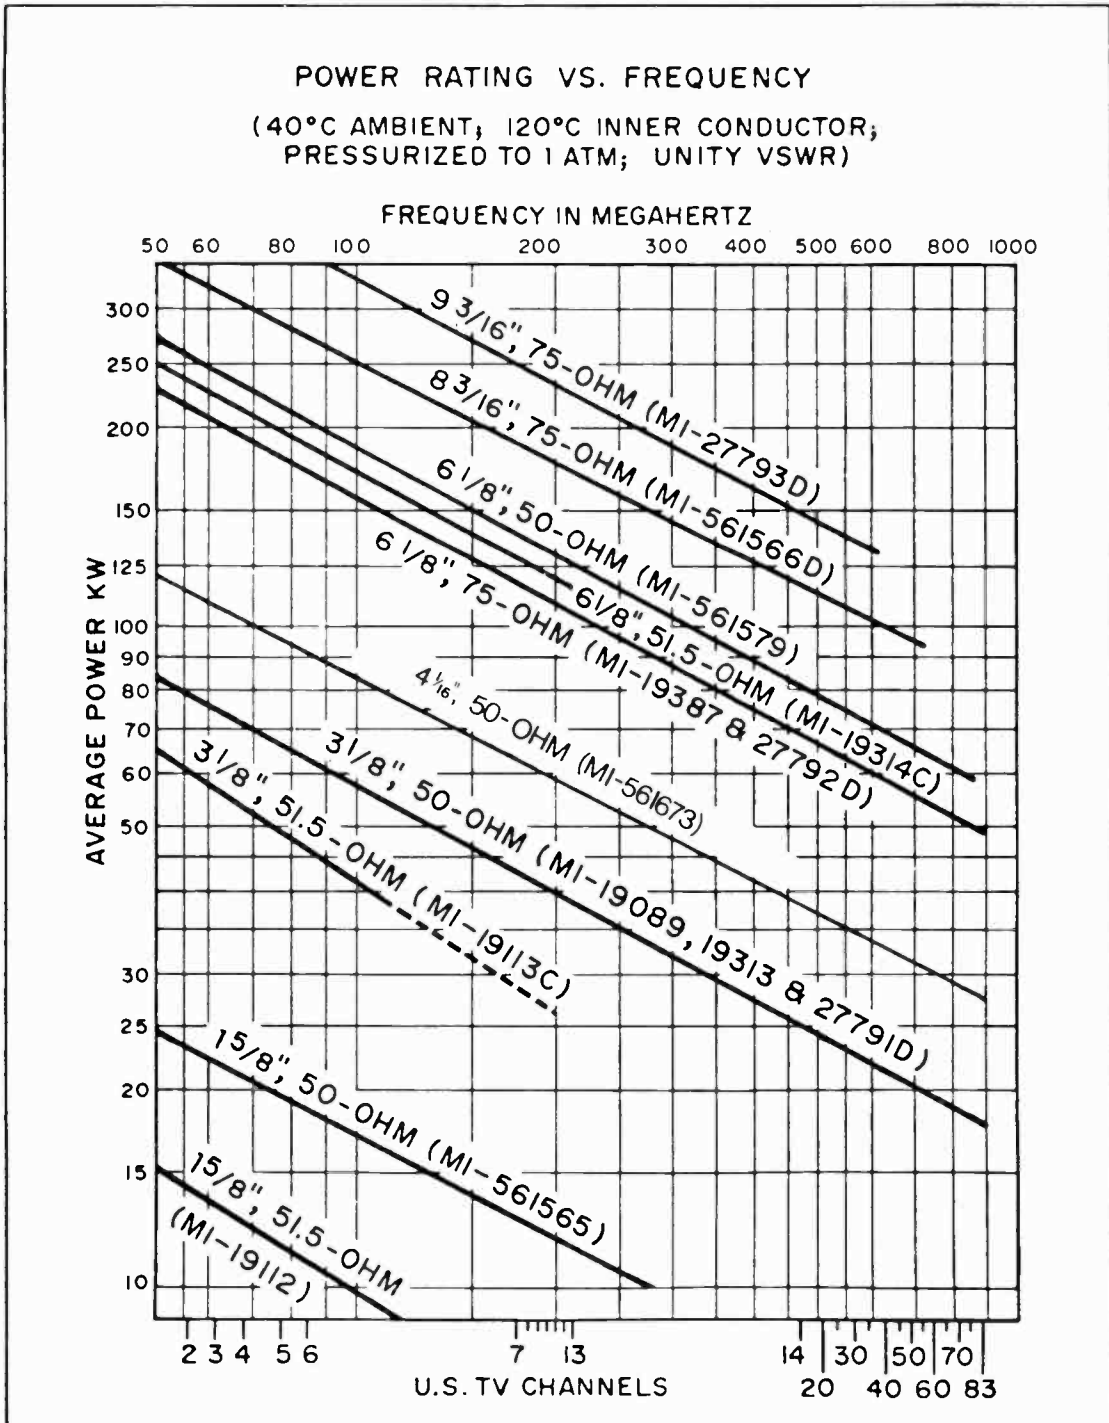



COAXIAL TRANSMISSION LINE

RIGID COAXIAL LINE — ATTENUATION AT FM FREQUENCIES

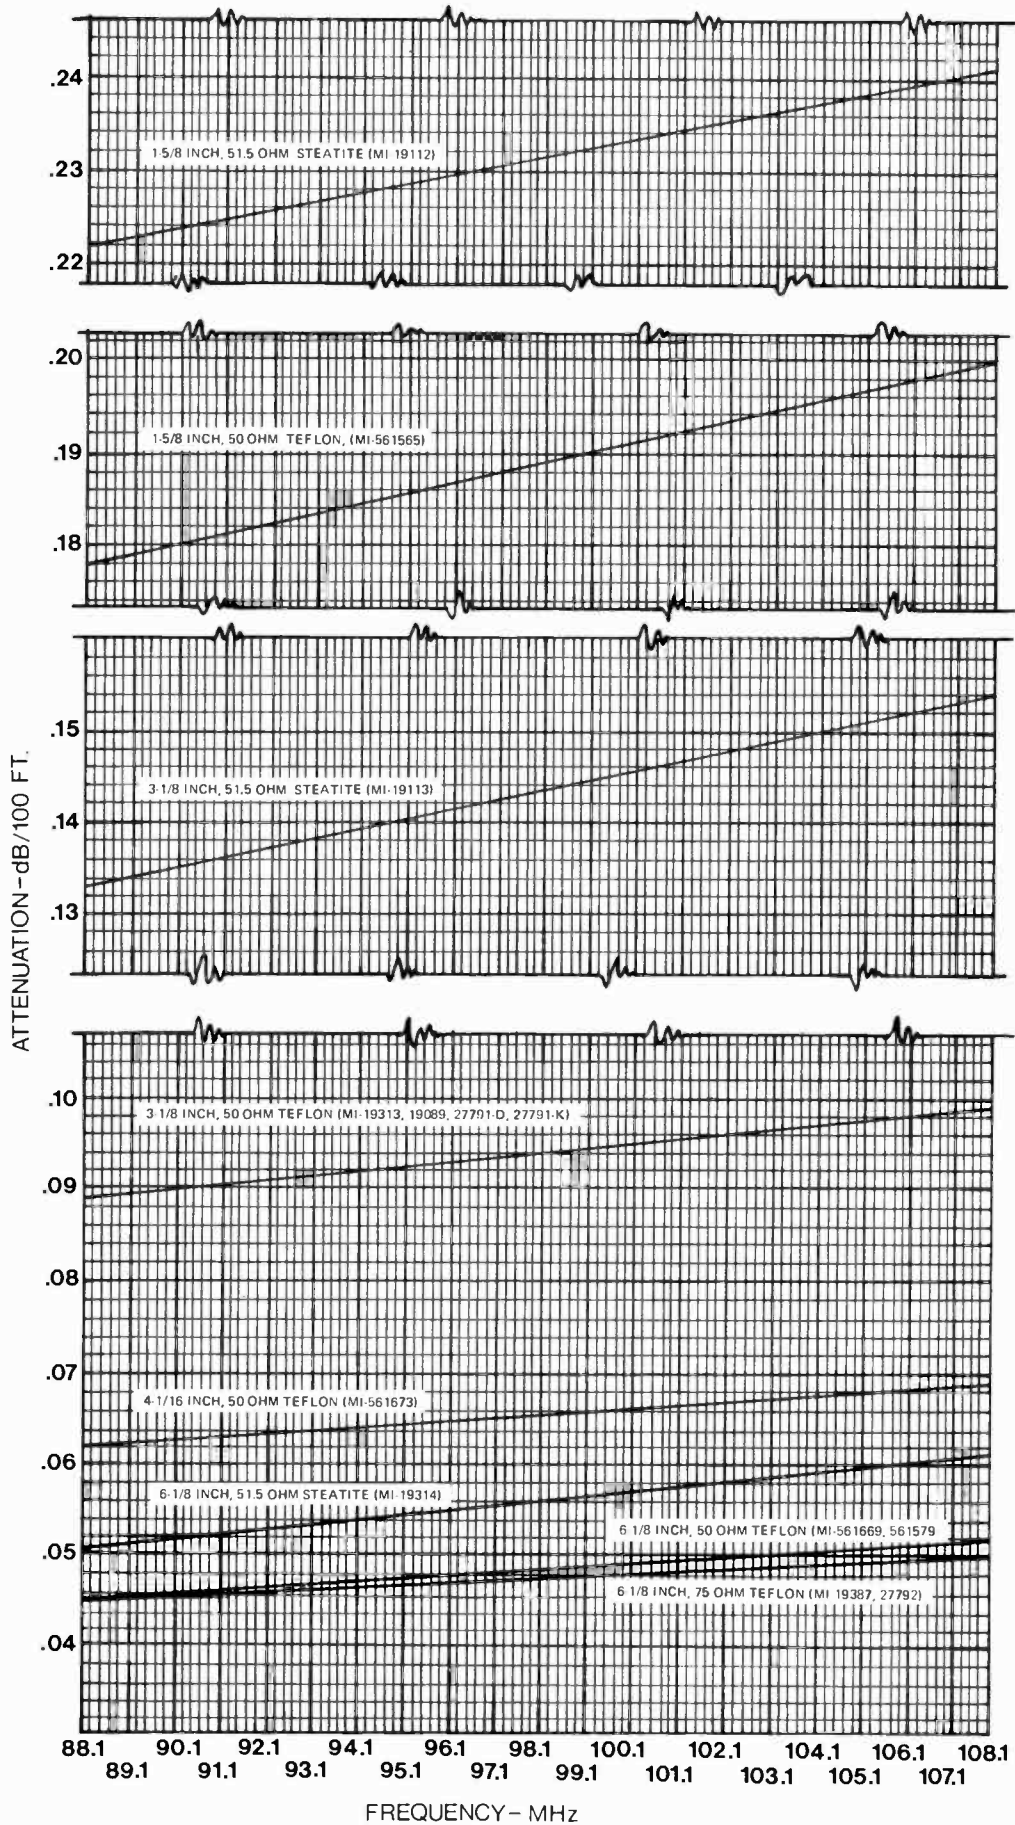



COAXIAL TRANSMISSION LINE

Attenuation and Power Curves for Andrews 50-Ohm Air Dielectric Heliax at Unity VSWR

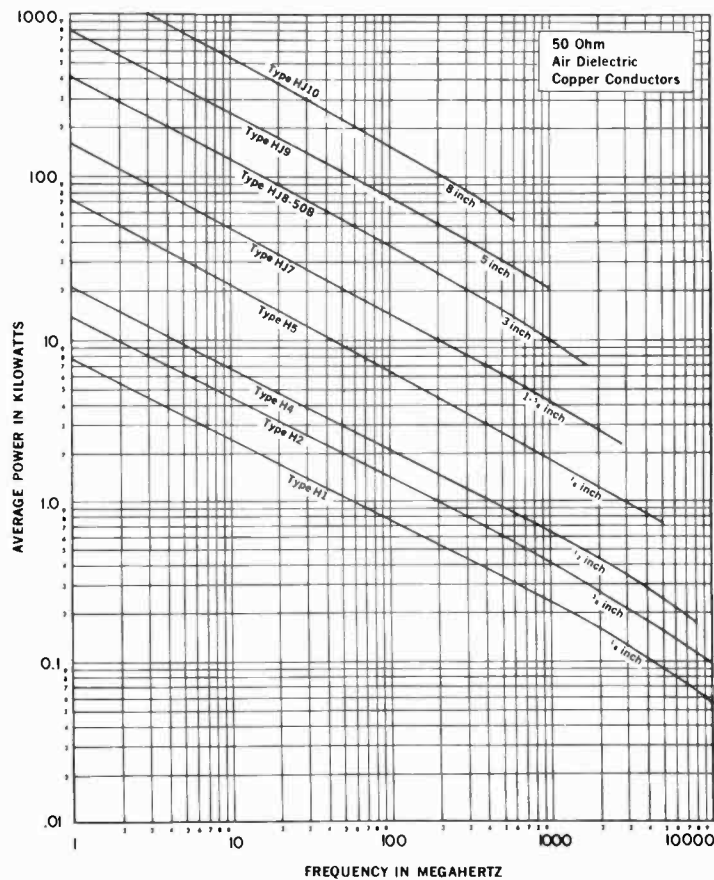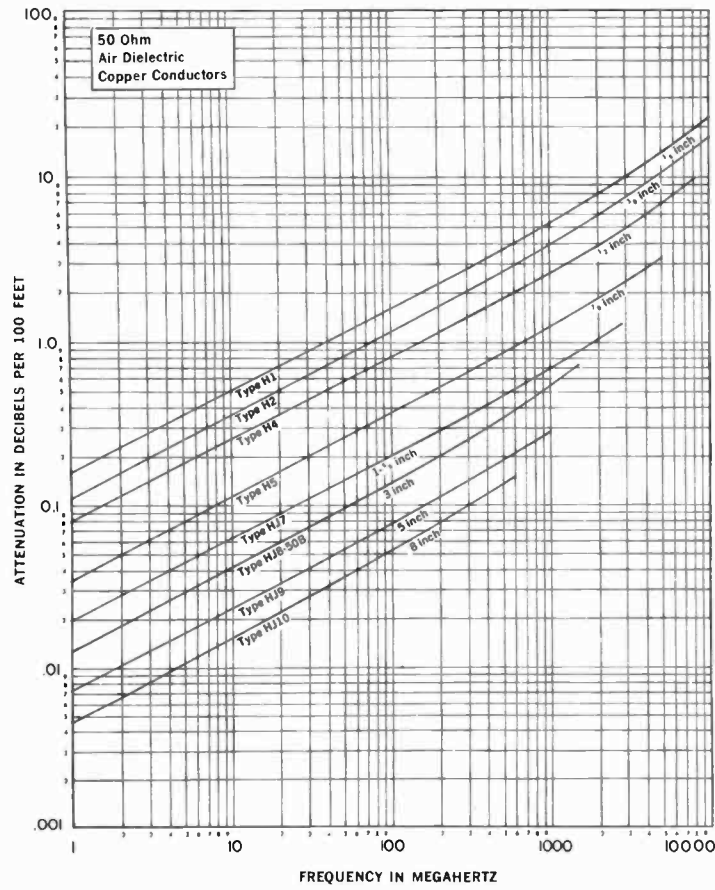

COAXIAL TRANSMISSION LINE

Attenuation and Power Curves for Andrews 50-Ohm Foam Heliax at Unity VSWR

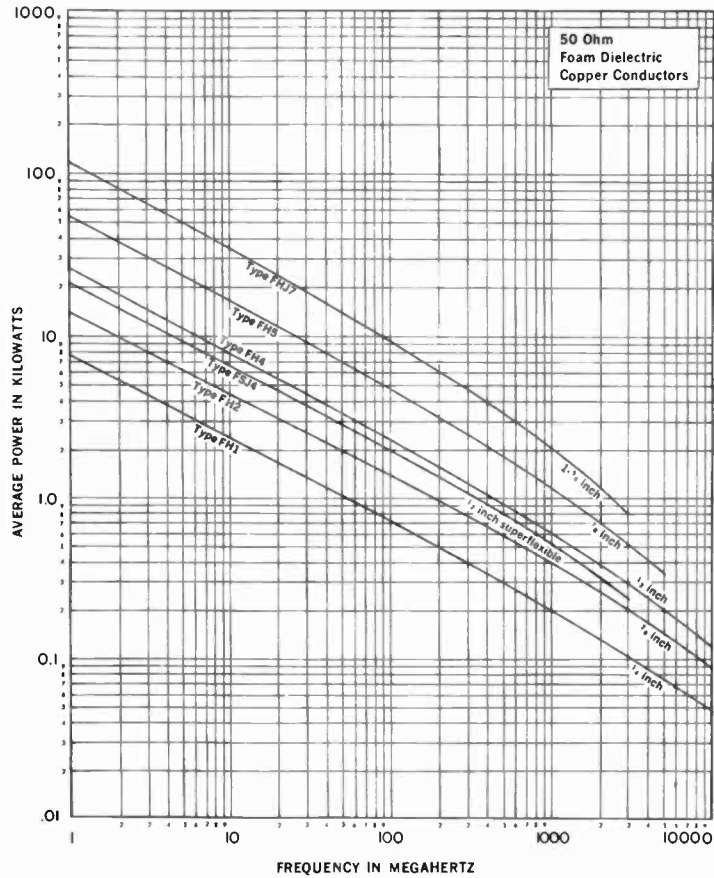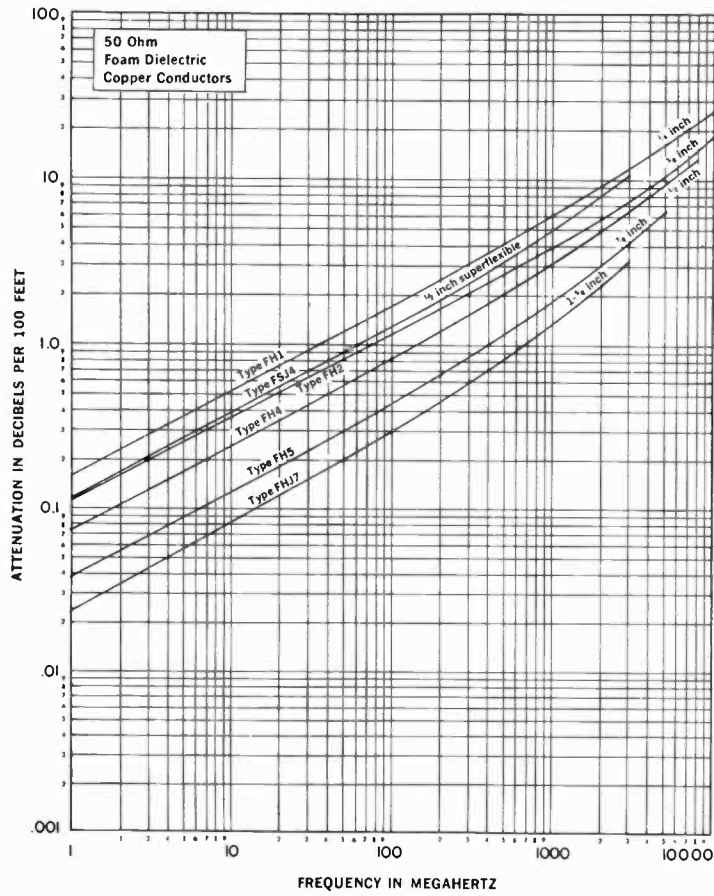


COAXIAL TRANSMISSION LINE

Attenuation and Power Curves for Cablewave Air Wellflex Cable

Air Wellflex Cable Attenuation

CORRUGATED COPPER/50 OHM/AIR DIELECTRIC

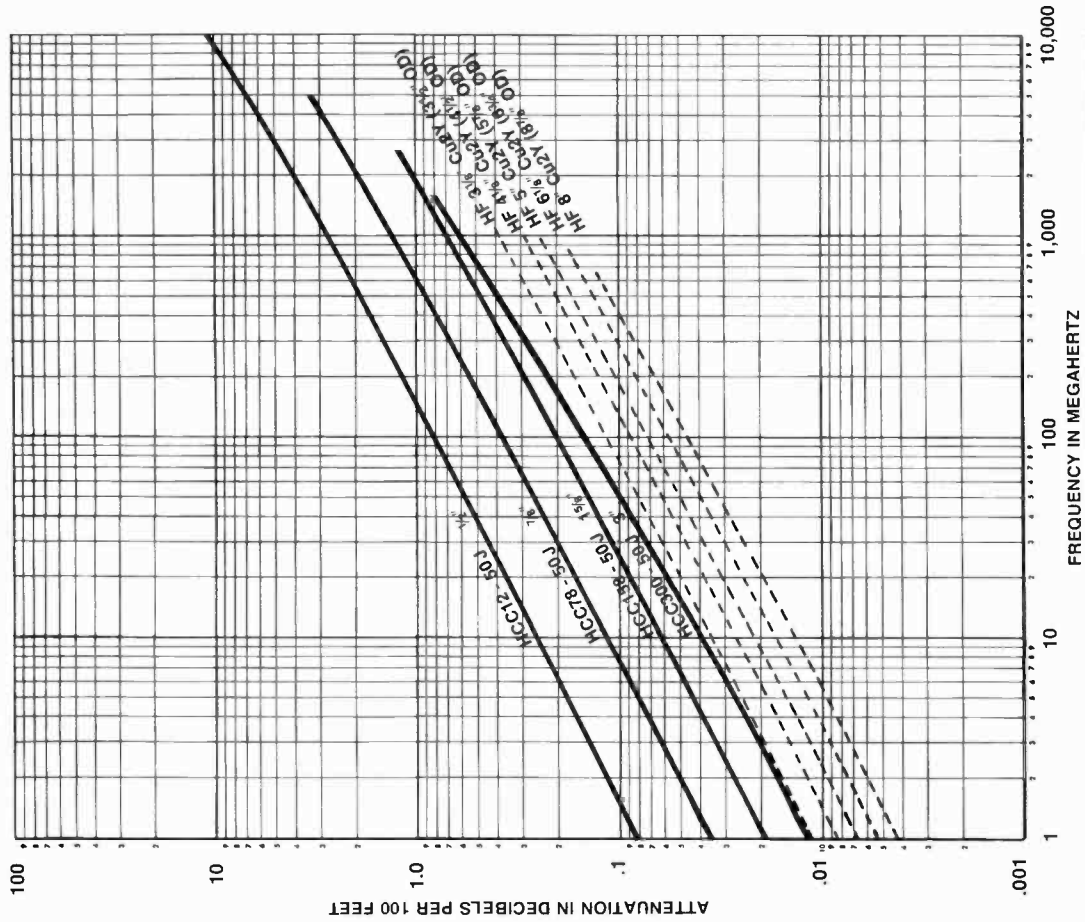


Attenuation curves based on:
 Ambient Temperature 20 C (68 F)
 Unpressurized dry air (0 psig)

Conversion Data:
 1 db/100 feet = 3.28 db/100 meters
 For 75 ohm cables, multiply by .94

Air Wellflex Average Power Rating

CORRUGATED COPPER/50 OHM/AIR DIELECTRIC

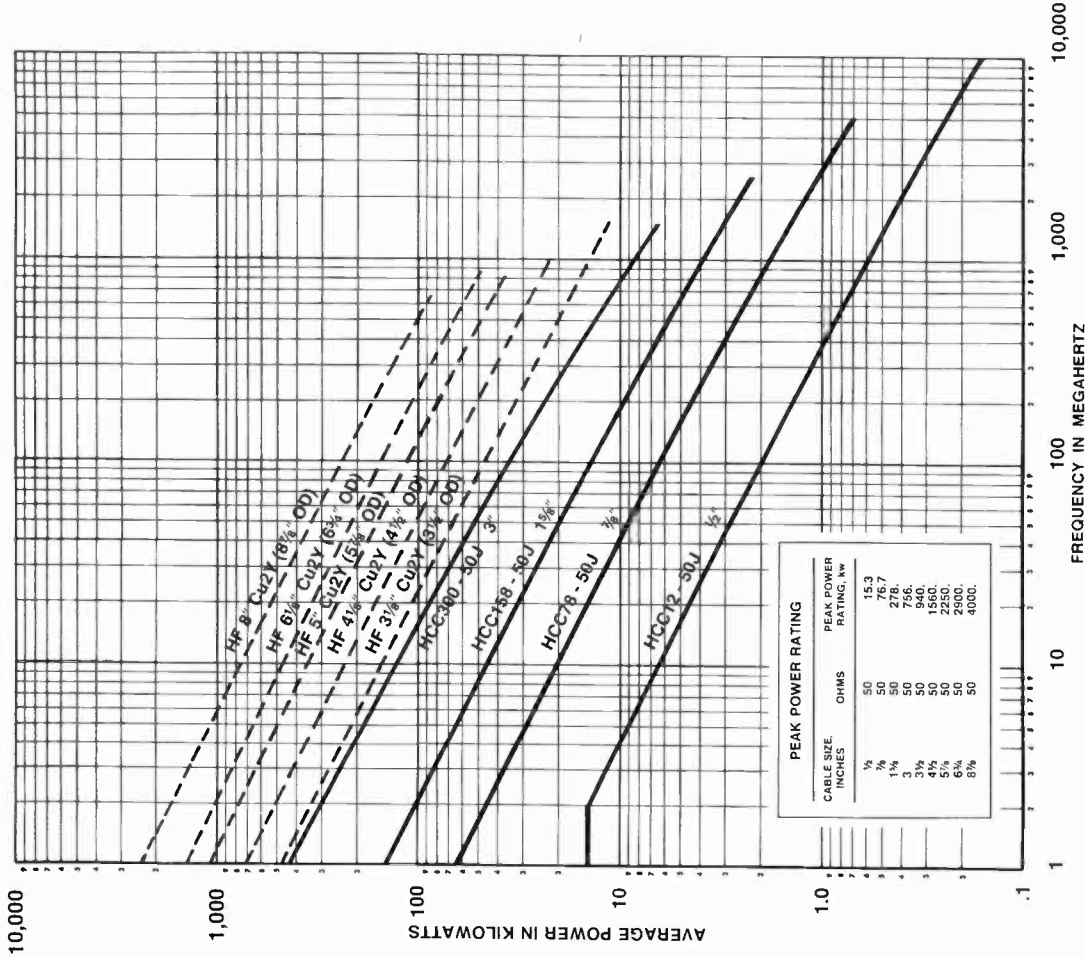

PEAK POWER RATING		
CABLE SIZE, INCHES	OHMS	PEAK POWER RATING, kW
1/2"	50	15.3
3/4"	50	27.7
1 1/4"	50	75.6
3"	50	940.
4 1/2"	50	1560.
6 1/2"	50	2600.
8"	50	4000.

Power ratings based on:
 VSWR 1.0
 Ambient Temperature 40°C(104F)
 Unpressurized dry air (0 psig)


Conversion Data:
 Ambient temperature 50°C(122F), multiply by .78 to .80
 For 5 psig dry air pressure, multiply by 1.07
 For 15 psig dry air pressure, multiply by 1.2

COAXIAL TRANSMISSION LINE

Attenuation and Power Curves for Cablewave Foam Wellflex Cable.

Foam Wellflex Cable Attenuation

CORRUGATED COPPER/50 OHM/FOAM POLYETHYLENE DIELECTRIC

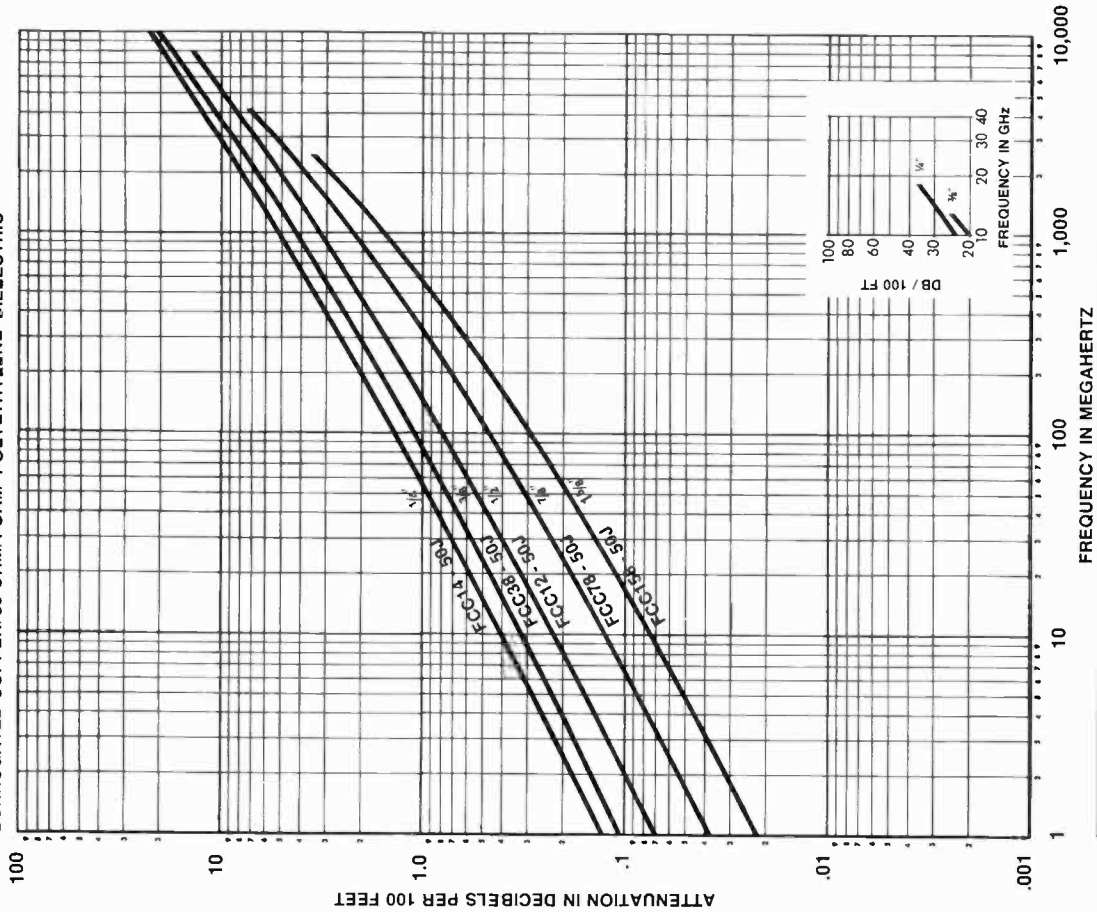


Attenuation curves based on:
 Ambient Temperature 20°C (68°F)

Conversion Data:
 1 dB/100 feet = 3.28 dB/100 meters
 For aluminum outer conductors multiply by 1.06
 For 75 ohm cables, multiply by .99

Foam Wellflex Average Power Rating

CORRUGATED COPPER/50 OHM/FOAM POLYETHYLENE DIELECTRIC

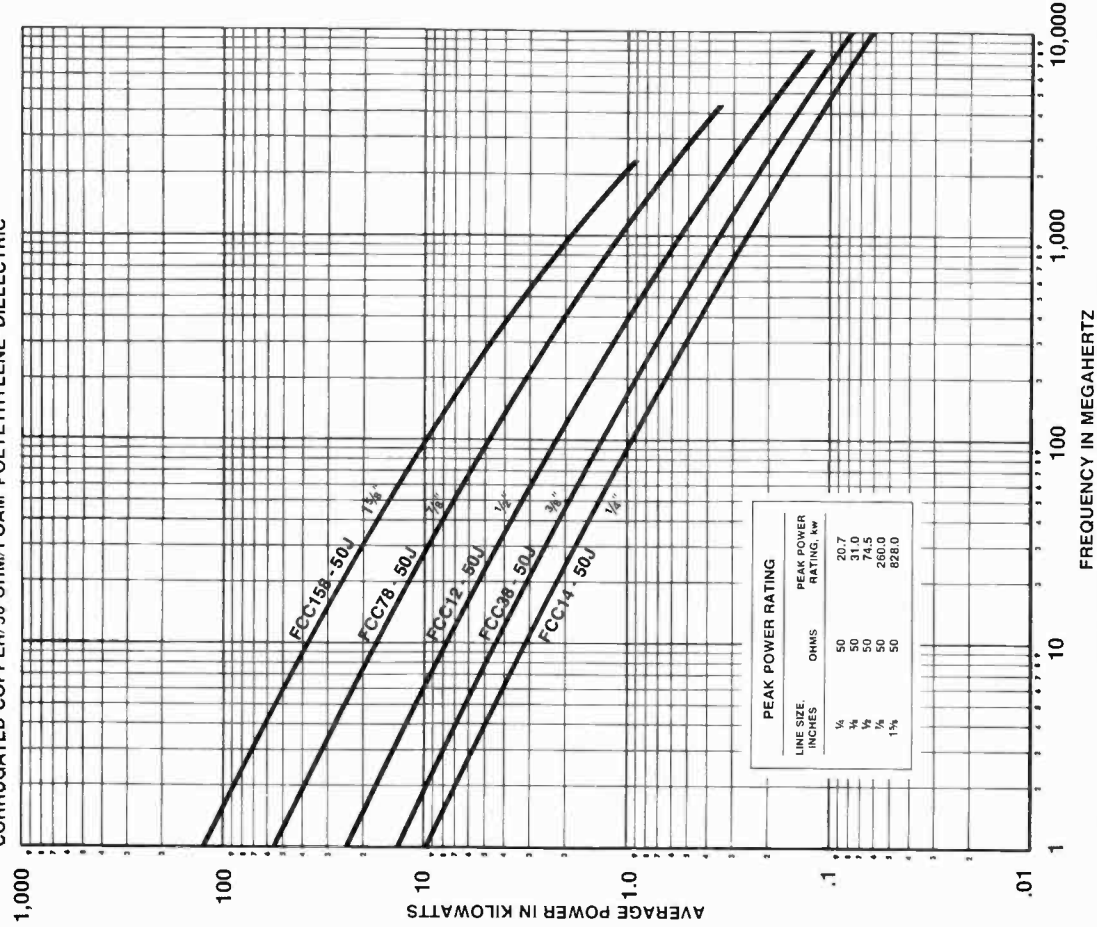

PEAK POWER RATING		
LINE SIZE, INCHES	OHMS	PEAK POWER RATING, kW
1/4"	50	30.7
3/8"	50	31.0
1/2"	50	74.5
3/4"	50	260.0
1"	50	828.0

Power ratings based on:
 VSWR 1.0
 Ambient Temperature 40°C (104°F)
 Inner conductor temperature 80°C (176°F)

Conversion Data:
 For ambient temperature 50°C (122°F), multiply by .75
 For 75 ohm cables multiply by .71
 For aluminum outer conductors multiply by .71

AUXILIARY BROADCAST SERVICES

FCC rules provide for the use of radio transmitting apparatus to supply auxiliary services in connection with AM and FM broadcasting. These include:

Remote Pickup Mobile Stations, which may be used for relaying aural broadcast program material.

Remote Pickup Base Stations, used principally to provide communication with remote mobile stations, and for other uses under special circumstances. Equipment, frequency assignments, technical operation and channel availability are identical with those for the mobile stations. Base stations, however, are permanently installed at a fixed location and do not normally carry program material.

Studio-to-Transmitter Links, which are available to the licensees of AM and FM broadcast stations and are used to relay programs from the studio to the transmitter of the station. The licensee of both an AM and FM station may use the same STL for both stations. The STL may also be used to provide communication between studio and transmitter when no programs are being transmitted, or if multiplexing is employed, may be used for communication during program transmission.

Radio Order Circuits, which are authorized for use over remote pickup base stations for two-way communication between the studio and transmitter of a broadcast station which has a radio STL. Radio order circuits are licensed for unlimited time operation, but their use is secondary to other needs for the same frequencies.

FM Inter-City Relay Stations, which are authorized only when suitable common carrier facilities are not available. Radio or wire lines may be used. Frequencies are the same as those used for broadcast STL's. Directional antennas are required, and they may be operated by remote control.

The brief explanations of FCC rules contained in this data book are intended to assist the reader in planning remote pickup and STL equipment, and should not be considered authoritative for every purpose. Reference should be made to the full text of Part 4 of the FCC rules to assure accuracy when necessary. Outside U.S.A., local rules should prevail.

STL FREQUENCIES

(Emission: 430-F-3; Frequency in MHz)

942.5*	944.5*		948.5
943.0*	945.0*	947.0	949.0
943.5*	945.5*	947.5	949.5
944.0*	946.0*	948.0	950.0
	946.5*		950.5
			951.0
			951.5

*Frequencies assigned to Land Mobile requiring waiver application to FCC for use by STL in areas where all STL frequencies are assigned.

RADIO ORDER CIRCUIT FREQUENCIES

Group	Frequency	Type Emission
I	26.07	20-A-3
	26.09	or 20-F-3
	26.11	
	26.45	
J	26.13	20-A-3
	26.47	or 20-F-3

AUXILIARY BROADCAST SERVICES

REMOTE PICKUP ALLOCATIONS AND AUTHORIZATIONS

The following groups of frequencies are allocated for assignment to remote pickup broadcast stations. A licensee may have one or more frequencies assigned for operation in the same area, but is limited within each "division" to assignments from a single "group".

Division	Group	Frequencies	Type Emission	Shared	Remarks
1	A	1606 kHz ¹	10-A-3	No	
		1622 kHz		No	
		1646 kHz		No	
2	D	25.87 MHz ²	20-A-3/20-F-3	No	
		26.15 MHz		No	
		26.25 MHz		No	
		26.35 MHz		No	
2	E	25.91 MHz ²	20-A-3/20-F-3	No	
		26.17 MHz		No	
		26.27 MHz		No	
		26.37 MHz		No	
2	F	25.95 MHz ²	20-A-3/20-F-3	No	
		26.19 MHz		No	
		26.29 MHz		No	
		26.39 MHz		No	
2	G	25.99 MHz ²	20-A-3/20-F-3	No	
		26.21 MHz		No	
		26.31 MHz		No	
		26.41 MHz		No	
2	H	26.03 MHz ²	20-A-3/20-F-3	No	
		26.23 MHz		No	
		26.33 MHz		No	
		26.43 MHz		No	
3	I	26.07 MHz ²	20-A-3/20-F-3	No	When used for radio order circuits such use is secondary to all other permissible uses.
		26.11 MHz		No	
		26.45 MHz		No	
3	J	26.09 MHz ²	20-A-3/20-F-3	No	
		26.13 MHz		No	
		26.47 MHz		No	
4	K	152.87 MHz ³	30-A-3/60-F-3	Yes	Shared with Industrial Radio Services which have first priority on the frequencies.
		152.93 MHz		Yes	
		152.99 MHz		Yes	
		153.05 MHz		Yes	
		153.11 MHz		Yes	
		153.17 MHz		Yes	
		153.23 MHz		Yes	
		153.29 MHz		Yes	
		153.35 MHz		Yes	
		161.64 MHz ⁵		Yes	
		161.67 MHz		Yes	
		161.70 MHz		Yes	
		161.73 MHz		Yes	
		161.76 MHz		Yes	
		(Following frequencies used in Puerto Rico & Virgin Islands only)			
		160.89 MHz		Yes	
		160.95 MHz		Yes	
		161.01 MHz		Yes	
		161.07 MHz		Yes	
		161.13 MHz		Yes	
		161.19 MHz		Yes	
		161.25 MHz		Yes	
		161.31 MHz		Yes	
		161.37 MHz		Yes	

AUXILIARY BROADCAST SERVICES

REMOTE PICKUP ALLOCATIONS AND AUTHORIZATIONS

Division	Group	Frequencies	Type Emission	Shared	Remarks
5	L	166.25 MHz ¹	30-A-3/60-F-3	No	
5	M	170.15 MHz	30-A-3/60-F-3	No	
6	N	450.05 MHz	30-A-3/100-F-3	No	
		450.15 MHz		No	
		450.25 MHz		No	
		450.35 MHz		No	
		450.45 MHz		No	
		450.55 MHz		No	
		450.65 MHz		No	
		450.75 MHz		No	
		450.85 MHz		No	
		450.95 MHz		No	
6	N	455.05 MHz	30-A-3/100-F-3	No	
		455.15 MHz		No	
		455.25 MHz		No	
		545.35 MHz		No	
		455.45 MHz		No	
		455.55 MHz		No	
		455.65 MHz		No	
		455.75 MHz		No	
		455.85 MHz		No	
		455.95 MHz		No	

¹ Subject to the condition that no harmful interference is caused to the reception of standard broadcast stations.

² Subject to the condition that no harmful interference is caused to the reception of broadcasting stations.

³ Subject to the condition that no harmful interference is caused to stations operating in accordance with the Table of Frequency Allocations.

⁴ Operation on the frequencies 166.25 MHz and 170.15 MHz is not authorized (I) within the area bounded on the west by the Mississippi River, on the north by the parallel of latitude 37°30' N., and on the east and south by that arc of the circle with center at Springfield, Ill., and radius equal to the airline distance between Springfield, Ill., and Montgomery, Alabama, subtended between the foregoing west and north boundaries: (II) within 150 miles of New York City; and (III) in Alaska or outside the continental United States; and is subject to the condition that no harmful interference is caused to government radio stations in the band 162-174 MHz.

⁵ These frequencies may not be used by remote pickup stations in Puerto Rico or the Virgin Islands. In other areas, certain existing stations in the Public Safety and Land Transportation Radio Services have been permitted to continue operation on these frequencies on condition that no harmful interference is caused to remote pickup broadcast stations.

USES AUTHORIZED FOR BROADCAST REMOTE PICKUP

Broadcasters may use remote pickup stations at their discretion and the choice does not depend on whether or not wire lines are available.

Remote pickup broadcast stations may be used for:

- (A) Transmission of AM, FM, or the aural portion of TV program material originating outside a regular studio.
(Normally only Mobile stations are used)
- (B) Orders and related communications directly concerning such transmissions.
(Both Base and Mobile stations may be so used)
They may not be used to provide mobile telephone systems to station personnel.
- (C) Emergency program or order circuits from studios in the event of failure of regular wire circuits.
(Both Base and Mobile stations may be so used)
They may not be so used on a regular basis.
- (D) Coordination of the activities of portable or mobile stations.
- (E) Two-way communication between the studio and transmitter of a broadcast station which has a radio STL.
(Base stations only)
- (F) Mobile communications in connection with adjustment and maintenance of antenna system, or in connection with field intensity surveys.
(Both Base and Mobile stations may be so used)
Authorized only under STA.
- (G) In Alaska, Hawaii, Puerto Rico and Virgin Islands for Intercity Relay and STL.
(Both Base and Mobile stations may be so used)
- (H) Low power broadcast auxiliary stations such as: cue and control signal transmitters and wireless microphones.

SAMPLE REMOTE PICKUP OR STL APPLICATION (FCC FORM 313)

This sample contains information for both the Model PCL-303 Monaural STL and Model PCL-303/C Composite Stereo STL. Bracketed [] information applies only to the Model PCL-303/C Composite Stereo STL

<p>FCC Form 313 January 1971</p> <p style="text-align: right;">Form Approved Budget Bureau No. 52-R0100</p> <p style="text-align: center;">Federal Communications Commission WASHINGTON, D. C. 20554</p> <p style="text-align: center;">APPLICATION FOR AUTHORIZATION IN THE AUXILIARY RADIO BROADCAST SERVICES</p> <p style="text-align: center;">APPLICANT SHOULD NOT USE THIS BOX</p>	<p>(FOR COMMISSION USE ONLY)</p> <p>File No. _____</p> <p>Name of applicant (see Instruction E) _____</p> <p>Post Office address (Number, Street, City, State and ZIP Code) _____</p>																																				
<p style="text-align: center;">INSTRUCTIONS</p> <p>A. This form is to be used by licensees or permittees of existing Standard (AM), FM, and Television Broadcast stations when applying for Remote Pick-up, STL, and other stations coming under the Auxiliary Radio Broadcast Services (See Part 74 of the Rules).</p> <p>B. A separate FCC Form 313 must be filed for each station authorization being requested. Complete all paragraphs if for a new station or for modification of construction permit or license; complete paragraphs 1, 3, 4, and 7 if for a license. (This form is to be used for RENEWAL of license ONLY when there have been changes in the information shown on the station license being renewed; when there have been no changes use FCC Form 313-R.) When this form is filed for renewal, complete all paragraphs necessary to indicate changes.</p> <p>C. Prepare and file two copies (three for Television), with the Federal Communications Commission, Washington, D. C. 20554.</p> <p>D. Number exhibits serially in the spaces provided in the body of the form and date each exhibit.</p> <p>E. The name of the applicant must be stated exactly as it appears in the authorization for the broadcast station with which the auxiliary station is to be used.</p> <p>F. This application shall be personally signed by the applicant, if the applicant is an individual; by one of the partners, if the applicant is a partnership; by an officer, if the applicant is a corporation; by a member who is an officer, if the applicant is an unincorporated association; by such duly elected or appointed officials as may be competent to do so under the laws of the applicable jurisdiction, if the applicant is an eligible government entity; or by the applicant's attorney in case of the applicant's physical disability or of his absence from the United States. The attorney shall, in the event he signs for the applicant, separately set forth the reason why the application is not signed by the applicant. In addition, if any matter is stated on the basis of the attorney's belief only (rather than his knowledge), he shall separately set forth his reasons for believing that such statements are true.</p> <p>G. Items 4(a) and 4(b) apply to stations at fixed locations only and Item 4(c) applies to mobile stations only. All parts of Items 4(a) and (b) must be answered on all applications for new fixed stations and modifications thereof. Item 4(b) means the point of communication of the transmitter being applied for. (For Remote Pickup stations, the point of communication is normally the base station location for mobile units and the mobile units for base stations.)</p>	<p>1. Purpose of this application (indicate below)</p> <p>(a) Type of station requested (see Instruction A): _____</p> <p>(b) Call Sign of existing Permit or of License being renewed: _____</p> <p>(c) Kind of authorization requested:</p> <p><input type="checkbox"/> New Station (for mobile and fixed stations) <input type="checkbox"/> Modification of Existing Authorization</p> <p><input type="checkbox"/> License (for fixed stations only) <input type="checkbox"/> Renewal and Modification (see Instruction B)</p> <p>(d) Modification of existing authorization:</p> <p>Call <input type="checkbox"/></p> <p>Change frequency <input type="checkbox"/></p> <p>Replace equipment <input type="checkbox"/></p> <p>Change power <input type="checkbox"/></p> <p>Change transmitter location <input type="checkbox"/></p> <p>Install different antenna system <input type="checkbox"/></p> <p>Other modification (explain below) <input type="checkbox"/></p> <p>(e) Broadcast station(s) with which auxiliary station is to be used: Call Sign(s) _____</p> <p>2. If cost involved exceeds \$1,000, submit as Exhibit No. a statement itemizing cost and a balance sheet of the applicant as at the close of a month within 90 days of the date of the application.</p>																																				
<p>3. Facilities requested</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">FREQUENCIES</th> <th style="width: 25%;">POWER ¹</th> <th style="width: 25%;">TYPE OF EMISSION ²</th> <th style="width: 25%;">COMMUNICATION BAND WIDTH (kHz) ³</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table> <p>¹For amplitude modulation television (A5), give maximum antenna input power during synchronizing pulses. If particulars are not fully described above, such as aural and visual carrier frequencies for television and type of emission, etc., supply this information here:</p> <p>²Use emission symbols listed in Part 2 of Commission's Rules.</p> <p>³Communication bandwidth is the actual bandwidth of the emission plus twice the frequency tolerance. (See appropriate service rules for permissible bandwidth.)</p>		FREQUENCIES	POWER ¹	TYPE OF EMISSION ²	COMMUNICATION BAND WIDTH (kHz) ³																																
FREQUENCIES	POWER ¹	TYPE OF EMISSION ²	COMMUNICATION BAND WIDTH (kHz) ³																																		
<p>4. Location of proposed transmitter</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3" style="text-align: left;">(a) For stations with fixed location</th> <th colspan="3" style="text-align: left;">(b) Receiving point (See Instruction G)</th> </tr> <tr> <th style="width: 20%;">City</th> <th style="width: 20%;">County</th> <th style="width: 20%;">State</th> <th style="width: 20%;">City</th> <th style="width: 20%;">County</th> <th style="width: 20%;">State</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td colspan="3">Street and number (or other description of location)</td> <td colspan="3">Street and number (or other description of location)</td> </tr> <tr> <td colspan="3">NORTH LATITUDE ° ' "</td> <td colspan="3">WEST LONGITUDE ° ' "</td> </tr> <tr> <td colspan="3"> </td> <td colspan="3"> <p>(c) For portable or mobile operation</p> <p>Area in which station is to be used:</p> </td> </tr> </tbody> </table>		(a) For stations with fixed location			(b) Receiving point (See Instruction G)			City	County	State	City	County	State							Street and number (or other description of location)			Street and number (or other description of location)			NORTH LATITUDE ° ' "			WEST LONGITUDE ° ' "						<p>(c) For portable or mobile operation</p> <p>Area in which station is to be used:</p>		
(a) For stations with fixed location			(b) Receiving point (See Instruction G)																																		
City	County	State	City	County	State																																
Street and number (or other description of location)			Street and number (or other description of location)																																		
NORTH LATITUDE ° ' "			WEST LONGITUDE ° ' "																																		
			<p>(c) For portable or mobile operation</p> <p>Area in which station is to be used:</p>																																		

5. Antenna system (a) Description (including manufacturer and type number, if any) Is a directional antenna system to be used? YES <input type="checkbox"/> NO <input type="checkbox"/> If "Yes," specify antenna gain in the main lobe of radiation, preferably in terms of free-space field in millivolts per meter for 1 kilowatt at 1 mile. Direction of radiation of the main lobe of the transmitting antenna in degrees, measured in a clockwise direction with true north as zero azimuth. (If more than one antenna is used, give direction for each.) (b) Supply the following for fixed installations only: <table style="width:100%; border: none;"> <tr> <td style="width:50%; border: none;">Over-all height above ground level in feet</td> <td style="width:50%; border: none;">Over-all height above mean sea level in feet</td> </tr> </table> Description and height of supporting structure (differentiate between structure now existent and that to be erected.) Attach as Exhibit No. _____ a sketch of vertical plan, showing heights of significant portions. (c) Is supporting structure to be used in common for the antenna system of another class of station? YES <input type="checkbox"/> NO <input type="checkbox"/> If the answer is "Yes," give: Class of station(s) _____ Call letters _____		Over-all height above ground level in feet	Over-all height above mean sea level in feet	6. If this application is for a television remote pick-up or television STL station incorporating an aural transmitter, the information requested in paragraphs 7 and 8 should also be supplied for the aural transmitter in Exhibit No. _____ 7. Transmitting apparatus proposed to be installed <table style="width:100%; border: none;"> <tr> <td style="width:33%; border: none;">Manufacturer</td> <td style="width:33%; border: none;">Type No.</td> <td style="width:33%; border: none;">Maximum rated power output</td> </tr> </table> Oscillator: <table style="width:100%; border: none;"> <tr> <td style="width:66%; border: none;">Type of circuit</td> <td style="width:33%; border: none;">Frequency</td> </tr> </table> Tubes: <table style="width:100%; border: none;"> <tr> <td style="width:33%; border: none;">Make</td> <td style="width:33%; border: none;">Type</td> <td style="width:33%; border: none;">Number</td> </tr> </table> Last radio stage: Tubes <table style="width:100%; border: none;"> <tr> <td style="width:33%; border: none;">Make</td> <td style="width:33%; border: none;">Type</td> <td style="width:33%; border: none;">Number</td> </tr> </table> <table style="width:100%; border: none;"> <tr> <td style="width:33%; border: none;">Normal total plate current in last radio stage</td> <td style="width:33%; border: none;">Plate voltage</td> <td style="width:33%; border: none;">Method of modulation</td> </tr> </table>	Manufacturer	Type No.	Maximum rated power output	Type of circuit	Frequency	Make	Type	Number	Make	Type	Number	Normal total plate current in last radio stage	Plate voltage	Method of modulation
Over-all height above ground level in feet	Over-all height above mean sea level in feet																	
Manufacturer	Type No.	Maximum rated power output																
Type of circuit	Frequency																	
Make	Type	Number																
Make	Type	Number																
Normal total plate current in last radio stage	Plate voltage	Method of modulation																
8. Frequency and modulation For what percentage of modulation or swing is the transmitter designed? What is the guaranteed frequency tolerance in percent? Describe means incorporated in the transmitter for maintaining the frequency tolerance stated above. What external means will be employed by the applicant to insure that the assigned frequency is maintained with the tolerance specified by the Commission's Rules?																		

THE APPLICANT hereby waives any claim to the use of any particular frequency or of the ether as against the regulatory power of the United States because of the previous use of the same, whether by license or otherwise, and requests an authorization in accordance with this application. (See Section 304 of the Communications Act of 1934.) THE APPLICANT represents that this application is not filed for the purpose of impeding, obstructing, or delaying determination on any other application with which it may be in conflict. THE APPLICANT acknowledges that all the statements made in this application and attached exhibits are considered material representations, and that all the exhibits are a material part hereof and are incorporated herein as if set out in full in the application.

CERTIFICATION

I certify that the statements in this application are true, complete, and correct to the best of my knowledge and belief, and are made in good faith.

Signed and dated this _____ day of _____, 19 _____

INCLUDE FILING FEE WITH THIS APPLICATION. SEE PART 1 OF FCC RULES FOR AMOUNT OF FEE.

WILLFUL FALSE STATEMENTS MADE ON THIS FORM ARE PUNISHABLE BY FINE AND IMPRISONMENT. U.S. CODE, TITLE 18 SECTION 1001.

(NAME OF APPLICANT)

By _____
(SIGNATURE)

Title _____

Exhibits furnished as required by this form:

Exhibit No.	Para. No. of Form	Name of officer or employee (1) by whom or (2) under whose direction exhibit was prepared (show which)	Official title

AUXILIARY BROADCAST SERVICES

CHART A PCL-303 STL EQUIPMENT APPLICATION DATA
Information for Section 3 (Facilities Requested) of FCC Form 313

The following information will assist in completing Section 3 (Facilities Requested) of FCC Form 313 for the Model PCL-303 Aural STL.

SYSTEM CONFIGURATION Covered by Application		Frequency with Respect to channel center	Emission	Bandwidth
1	SINGLE STL — Monaural Use	On Center	110F3	120 kHz
2	SINGLE STL — Monaural Use with Type II Control	On Center	110F9	120 kHz
3	SINGLE STL — Monaural with 67 kHz SCA (some if Type III control is included)	On Center	230F9	240 kHz
4	DUAL STL — FM Stereo L or R channel L or R channel	+125 kHz -125 kHz	110F3 110F3	120 kHz 120 kHz
5	DUAL STL — FM Stereo & SCA L or R channel L or R channel & 67 kHz SCA	+125 kHz -125 kHz	110F3 230F9	120 kHz 240 kHz
6	DUAL STL — FM Stereo & SCA with Type III Remote Control System L or R channel & control L or R channel & 67 kHz SCA	+125 kHz -125 kHz	110F9 230F9	120 kHz 240 kHz
7	DUAL STL — FM Stereo with Type II Remote Control System L or R channel & control L or R channel	+125 kHz -125 kHz	110F9 110F3	120 kHz 120 kHz
8	COMPOSITE STEREO STL — FM Stereo	On Center	246F9	255 kHz
9	COMPOSITE STEREO STL — FM Stereo & (67 kHz)	On Center	290F9	300 kHz
10	COMPOSITE STEREO STL with Type II/C Radio Remote Control System	On Center	360F9	370 kHz
11	COMPOSITE STEREO STL with Type II/C Radio Remote Control System and program subcarrier channel	On Center	490F9	500 kHz

*In the near future, PCL-303 will be replaced by PCL-505. At the time this book was published, complete information on PCL-505 was not available. Contact RCA for current information.

PCL-303/C*

PCL-303/C*

AUXILIARY BROADCAST SERVICES

REMOTE PICKUP AND STL EQUIPMENT APPLICATION DATA

Equipment Type No.	RPL-3T	PCL-303*
Form 313 Reference:		
1. Purpose of this application:		
Type of Station		
STL		(See Chart A)
Remote Pickup (Mobile)	Remote Pickup (Mobile)	
Remote Pickup (Base)		
2. Facilities Requested		
Frequencies (MHz)	(150) ⁴	(950) ⁴
Power (W)	10	5
Type Emission	F3	(See Chart)
Bandwidth (kHz) ⁷	30	(See Chart)
4. Antenna System		
Manufacturer		Andrew, Scala ⁵
(See Notes 5, 6)		Mark Products ⁶
7. Transmitting Equipment		
Manufacturer	Moseley	Moseley
Equipment Type No.	RPL-3	PCL-303
Rated Power Out (W)	15	8
Oscillator Circuit	VCXO	VCO
Oscillator Frequency	F ^o /36	F ^o /12
Tubes: Make	various	various
Type	2N7159	2N4259
Number	1	1
Last Radio Stage:		
Tubes: Make	various	various
Type	B12-12	2N5016
Number	1	
Plate mA	1.4A	
Plate Volts	13.5VDC	
Modulation Method	FM	FM
8. Frequency & Modulation:		
Percent Modulation or Swing	±5 kHz	±40 kHz
Guaranteed Frequency Tolerance	±.0005%	±.001%
Frequency Control Method	See Sample 313	T-C crystal

Recommended Service: 1. Broadcast 2. Communications 3. Rack Mounted Version for Remote Pickup (Base)

4. Customer assigned frequency 5. Type PR450, directional, gain over reference dipole:17.5

6. Type P948G, directional, gain over reference dipole:18.9 7. Refer to FCC Rule Section 74.436

*In the near future, PCL-303 will be replaced by PCL-505. At the time this book was published, complete information on PCL-505 was not available. Contact RCA for current information.

REFERENCE DATA

FM BROADCAST STATION CLASSES & FREQUENCIES

Channel No.	Frequency	For Class	Channel No.	Frequency	For Class
201	88.1 MHz	†	251*	98.1 MHz	B-C
202	88.3 MHz	†	252*	98.3 MHz	A
203	88.5 MHz	†	253*	98.5 MHz	B-C
204	88.7 MHz	†	254*	98.7 MHz	B-C
205	88.9 MHz	†	255*	98.9 MHz	B-C
206	89.1 MHz	†	256*	99.1 MHz	B-C
207	89.3 MHz	†	257*	99.3 MHz	A
208	89.5 MHz	†	258*	99.5 MHz	B-C
209	89.7 MHz	†	259*	99.7 MHz	B-C
210	89.9 MHz	†	260*	99.9 MHz	B-C
211	90.1 MHz	†	261*	100.1 MHz	A
212	90.3 MHz	†	262*	100.3 MHz	B-C
213	90.5 MHz	†	263*	100.5 MHz	B-C
214	90.7 MHz	†	264*	100.7 MHz	B-C
215	90.9 MHz	†	265*	100.9 MHz	A
216	91.1 MHz	†	266*	101.1 MHz	B-C
217	91.3 MHz	†	267*	101.3 MHz	B-C
218	91.5 MHz	†	268*	101.5 MHz	B-C
219	91.7 MHz	†	269*	101.7 MHz	A
220	91.9 MHz	†	270*	101.9 MHz	B-C
221	92.1 MHz	A	271*	102.1 MHz	B-C
222	92.3 MHz	B-C	272*	102.3 MHz	A
223	92.5 MHz	B-C	273*	102.5 MHz	B-C
224	92.7 MHz	A	274*	102.7 MHz	B-C
225	92.9 MHz	B-C	275*	102.9 MHz	B-C
226	93.1 MHz	B-C	276*	103.1 MHz	A
227	93.3 MHz	B-C	277*	103.3 MHz	B-C
228	93.5 MHz	A	278*	103.5 MHz	B-C
229	93.7 MHz	B-C	279*	103.7 MHz	B-C
230	93.9 MHz	B-C	280*	103.9 MHz	A
231	94.1 MHz	B-C	281*	104.1 MHz	B-C
232	94.3 MHz	A	282*	104.3 MHz	B-C
233	94.5 MHz	B-C	283*	104.5 MHz	B-C
234	94.7 MHz	B-C	284*	104.7 MHz	B-C
235	94.9 MHz	B-C	285*	104.9 MHz	A
236	95.1 MHz	B-C	286*	105.1 MHz	B-C
237	95.3 MHz	A	287*	105.3 MHz	B-C
238	95.5 MHz	B-C	288*	105.5 MHz	A
239	95.7 MHz	B-C	289*	105.7 MHz	B-C
240	95.9 MHz	A	290*	105.9 MHz	B-C
241	96.1 MHz	B-C	291*	106.1 MHz	B-C
242	96.3 MHz	B-C	292*	106.3 MHz	A
243	96.5 MHz	B-C	293*	106.5 MHz	B-C
244	96.7 MHz	A	294*	106.7 MHz	B-C
245	96.9 MHz	B-C	295*	106.9 MHz	B-C
246	97.1 MHz	B-C	296*	107.1 MHz	A
247	97.3 MHz	B-C	297*	107.3 MHz	B-C
248	97.5 MHz	B-C	298*	107.5 MHz	B-C
249*	97.7 MHz	A	299*	107.7 MHz	B-C
250	97.9 MHz	B-C	300*	107.9 MHz	B-C

† For classes of noncommercial educational stations and their definition, refer to FCC Rules and Regulations, Paragraph 73.504.

* In Hawaii, the band 98-108 MHz is allocated for non-broadcast use, and the frequencies 98.1-107.9 MHz will not be assigned in Hawaii for use by FM broadcast stations.

DISTANCE IN MILES TO RECEIVING LOCATION AND DEPRESSION ANGLES FOR VARIOUS FM ANTENNA HEIGHTS


H—Height in feet to Electrical center of antenna

$$D_h = \text{Distance to horizon} = \sqrt{2H} \left(\frac{4}{3} \text{ earth radius} \right)$$

$$A_h = \text{Depression angle to horizon} = \frac{.0216H}{D_h}$$

The relationship $D = \frac{.0109 H}{A}$

gives approximate distances to intercept at various depression angles.

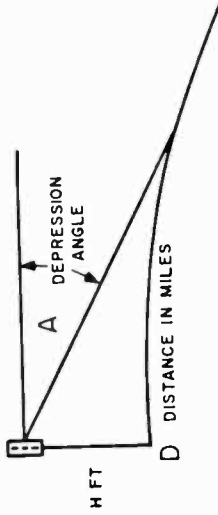

Height H Feet	Depression Angle																						
	D_h	A_h	0.5°	1°	1.5°	2°	2.5°	3°	3.5°	4°	4.5°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	
200	20.0	.216	4.6	2.21	1.45	1.07	0.86	0.71	0.61	0.54	0.48	0.43	0.36	0.31	0.27	0.24	0.22	0.20	0.18	0.17	0.15	0.14	0.14
300	24.5	.268	7.2	3.35	2.18	1.64	1.30	1.07	0.92	0.80	0.71	0.64	0.55	0.46	0.41	0.37	0.33	0.30	0.27	0.25	0.23	0.21	0.21
400	28.3	.304	9.9	4.49	2.90	2.18	1.75	1.42	1.24	1.06	0.94	0.86	0.73	0.62	0.54	0.49	0.46	0.40	0.36	0.33	0.31	0.29	0.29
500	31.6	.343	12.6	5.60	3.65	2.72	2.16	1.82	1.55	1.36	1.21	1.09	0.92	0.78	0.68	0.61	0.55	0.50	0.45	0.42	0.39	0.36	0.36
600	34.6	.375	16.0	6.81	4.8	3.61	2.64	2.15	1.86	1.63	1.42	1.31	1.09	0.92	0.81	0.73	0.65	0.59	0.54	0.50	0.46	0.43	0.43
700	37.4	.405	19.9	7.98	5.2	3.87	3.08	2.54	2.16	1.90	1.68	1.50	1.25	1.06	0.94	0.83	0.74	0.68	0.62	0.57	0.53	0.50	0.50
800	40.0	.435	24.2	9.2	5.9	4.49	3.52	2.89	2.50	2.17	1.90	1.75	1.45	1.22	1.05	0.97	0.86	0.78	0.72	0.67	0.61	0.58	0.58
900	42.4	.452	29.5	10.5	6.7	5.05	3.98	3.28	2.80	2.45	2.13	1.96	1.62	1.36	1.19	1.09	0.97	0.88	0.81	0.75	0.69	0.65	0.65
1000	45.0	.487	36.2	11.6	7.4	5.51	4.39	3.65	3.10	2.70	2.39	2.15	1.79	1.52	1.32	1.18	1.08	0.98	0.90	0.83	0.77	0.72	0.72
1200	49.0	.530	—	14.1	9.0	6.75	5.32	4.39	3.77	3.19	2.85	2.61	2.15	1.81	1.59	1.44	1.29	1.18	1.08	1.00	0.92	0.87	0.87
1400	53.0	.577	—	16.7	10.4	7.66	6.12	5.13	4.33	3.77	3.35	3.00	2.48	2.11	1.85	1.63	1.45	1.36	1.24	1.15	1.06	1.00	1.00
1600	56.6	.620	—	19.4	12.0	9.10	7.10	5.85	5.02	4.35	3.80	3.40	2.84	2.40	2.13	1.91	1.72	1.55	1.44	1.32	1.23	1.16	1.16
1800	60.0	.650	—	22.3	13.6	10.25	8.00	6.60	5.65	4.90	4.30	3.90	3.19	2.69	2.39	2.15	1.94	1.75	1.62	1.48	1.38	1.30	1.30
2000	63.2	.683	—	25.4	15.4	11.25	8.89	7.30	6.25	5.45	4.80	4.30	3.60	3.04	2.68	2.38	2.13	2.00	1.83	1.70	1.56	1.46	1.46
5000	100.0	1.080	—	—	42.9	29.5	22.80	18.75	15.85	13.75	12.10	10.90	9.01	7.75	6.73	6.00	5.40	4.90	4.50	4.15	3.84	3.60	3.60

REFERENCE DATA

FM RANGE CHART

The ground wave signal range chart, shown on the opposite page, is intended to be used for determining approximate coverage of FM broadcast stations operating in the 88-108 MHz band. The effect of transmitting antenna height and radiated power on field strength is indicated, and field strength vs. distance from the transmitting antenna is also shown.

To find the approximate radius of an area within a given field strength contour, proceed as follows:

1. Determine field strength in $\mu\text{V}/\text{m}$ required and find this figure along extreme right-hand vertical column.
2. Follow the diagonal line corresponding to required field strength until it intersects with the vertical line representing radiated power.
3. From this point, lay a ruler or straight edge across the chart and along the vertical line corresponding to antenna height, read distance in miles to the $\mu\text{V}/\text{m}$ contour selected.

The chart may also be used to find the value of radiated power required to cover a given area.


For example:

Find radiated power required to produce 1000 $\mu\text{V}/\text{m}$ signal at a distance of 30 miles with an antenna 500 feet high.

1. From the 500 foot mark on the "antenna height" scale, follow the vertical line upwards and locate the 30 mile point.
2. Lay a ruler or straight-edge across the chart from this point, taking care that the ruler is parallel with the bottom edge of the chart.
3. Mark the point where the ruler intersects with the diagonal line representing 1000 $\mu\text{V}/\text{m}$ and then from this point, place the ruler vertically on the chart and read approximately 18 kW radiated power on the scale at the upper right of the chart.

REFERENCE DATA

FM ESTIMATED FIELD STRENGTH CHART
(Receiving Antenna Height: 30 feet)

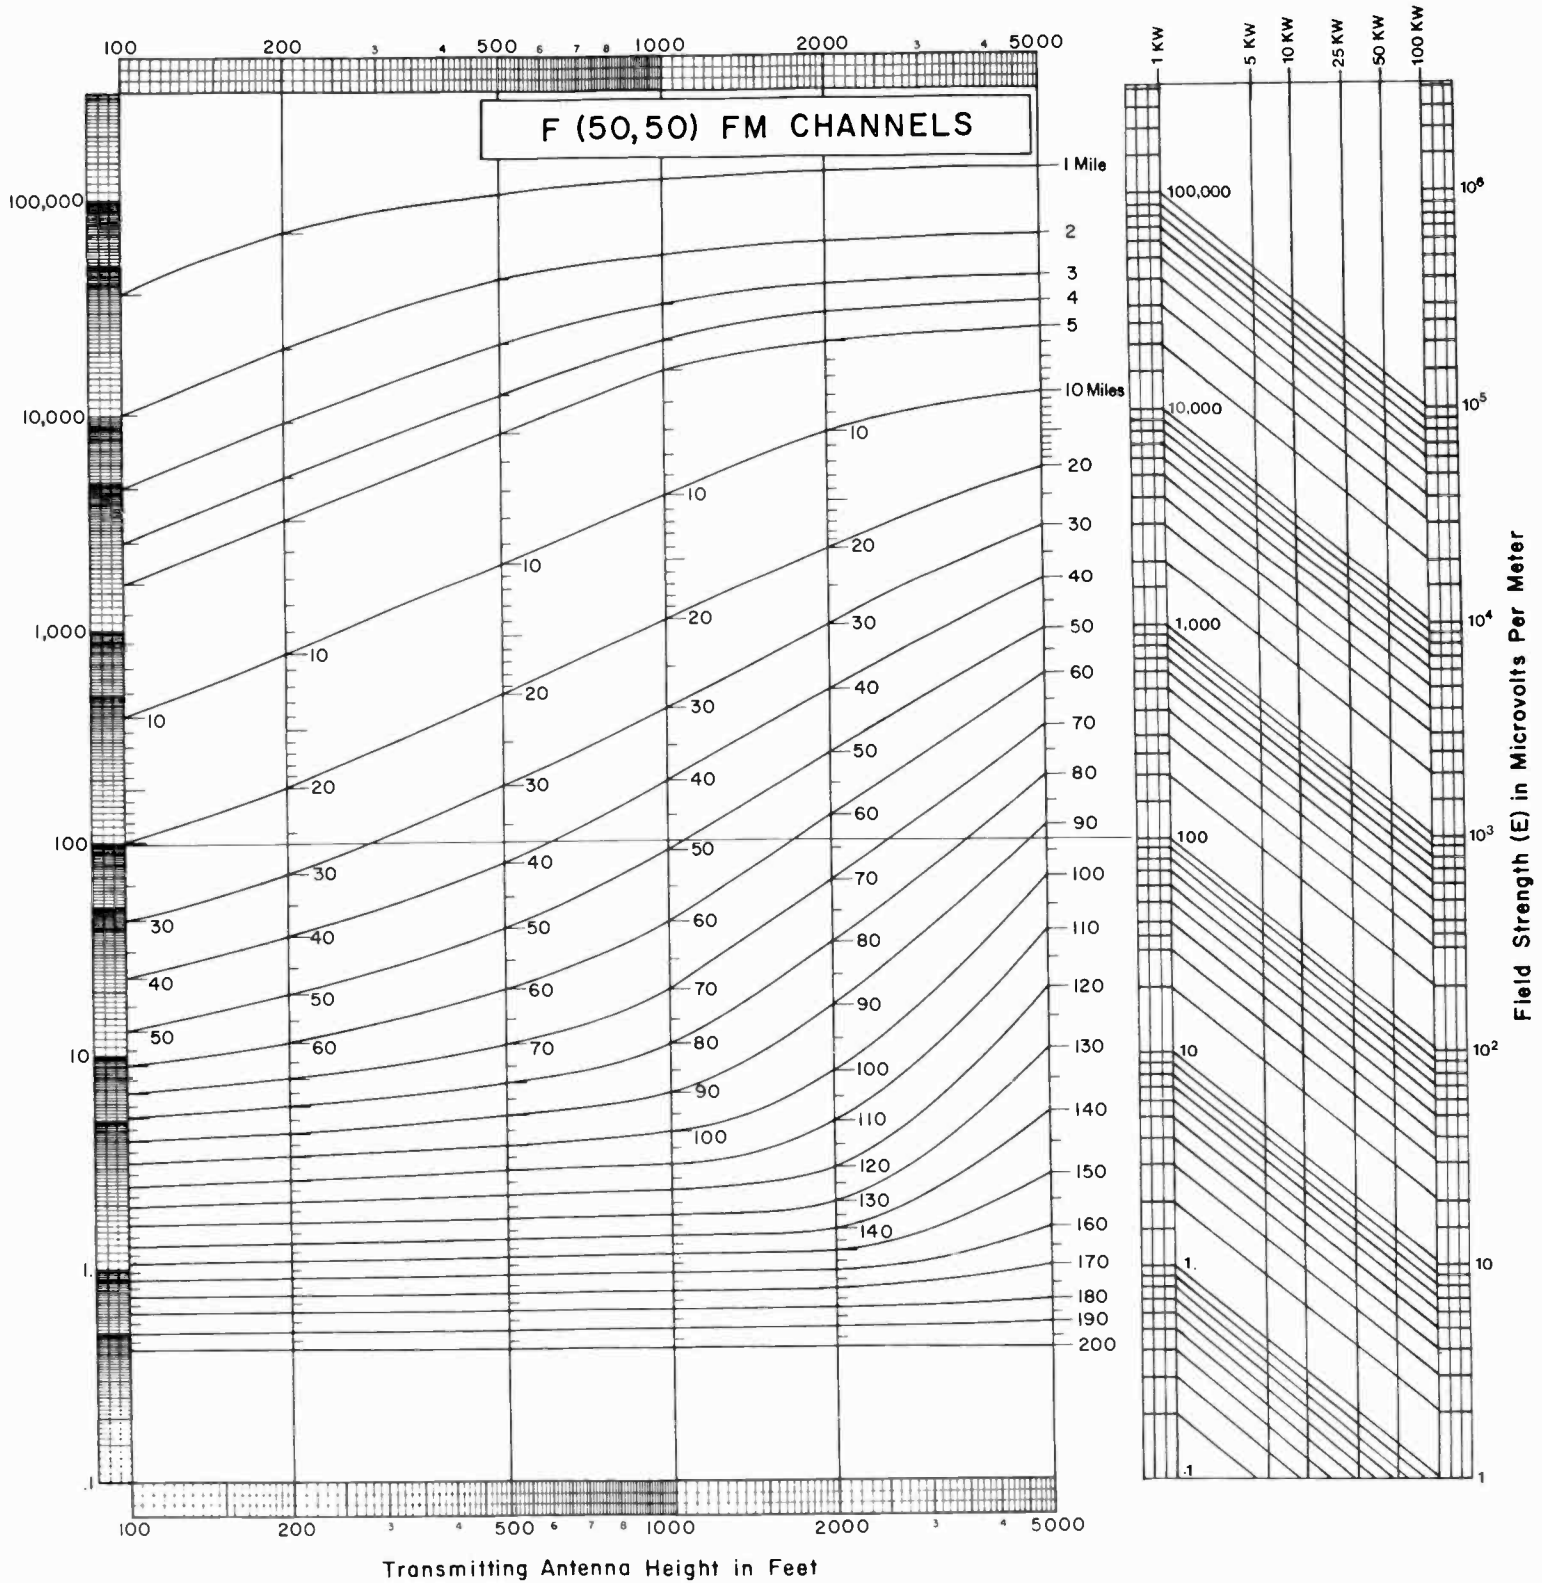

REFERENCE DATA


FOOTAGE TABLE FOR BROADCAST TOWER HEIGHTS

1080 kHz TO 1600 kHz					
kHz	METERS	1 WAVE	1/2 WAVE	1/4 WAVE	1/4 WAVE
1080	277.8	911.1	455.5	227.7	227.7
1090	275.2	902.6	451.3	225.6	225.6
1100	272.7	894.4	447.2	223.6	223.6
1110	270.3	886.5	443.2	221.6	221.6
1120	267.9	879.0	439.5	219.7	219.7
1130	265.5	870.8	435.4	217.7	217.7
1140	263.2	862.6	431.3	215.6	215.6
1150	260.9	855.7	427.8	213.9	213.9
1160	258.6	847.8	423.9	211.9	211.9
1170	256.4	840.9	420.4	210.2	210.2
1180	254.2	834.7	417.3	208.6	208.6
1190	252.1	828.8	413.4	206.7	206.7
1200	250.0	820.0	410.0	205.0	205.0
1210	247.9	813.1	406.5	203.2	203.2
1220	245.9	806.3	403.1	201.5	201.5
1230	243.9	799.1	399.5	199.7	199.7
1240	241.9	793.7	396.8	198.4	198.4
1250	240.0	787.2	393.6	196.8	196.8
1260	238.1	780.9	390.4	195.2	195.2
1270	236.2	774.7	387.3	193.6	193.6
1280	234.4	768.8	384.4	192.2	192.2
1290	232.6	762.9	381.4	190.7	190.7
1300	230.8	757.0	378.5	189.2	189.2
1310	229.0	751.1	375.5	187.7	187.7
1320	227.3	746.2	373.1	186.5	186.5
1330	225.6	739.9	369.9	184.9	184.9
1340	223.9	734.7	367.3	183.6	183.6
1350	222.2	728.8	364.4	182.2	182.2
1360	220.6	723.2	361.1	180.5	180.5
1370	219.0	718.3	359.1	179.5	179.5
1380	217.4	713.4	356.2	178.1	178.1
1390	215.8	707.8	353.1	176.5	176.5
1400	214.3	703.5	351.2	175.6	175.6
1410	212.8	696.9	348.4	174.2	174.2
1420	211.3	693.7	346.8	173.4	173.4
1430	209.8	688.1	344.0	172.0	172.0
1440	208.3	683.8	341.9	170.9	170.9
1450	206.9	678.6	339.3	169.6	169.6
1460	205.5	674.0	337.0	168.5	168.5
1470	204.1	669.4	334.7	167.3	167.3
1480	202.7	664.2	332.1	166.5	166.5
1490	201.3	660.2	330.1	165.0	165.0
1500	200.0	656.0	328.0	164.0	164.0
1510	198.7	651.7	325.8	162.9	162.9
1520	197.4	647.8	323.4	161.7	161.7
1530	196.1	643.2	321.6	160.8	160.8
1540	194.8	639.6	319.8	159.9	159.9
1550	193.5	634.6	317.3	158.6	158.6
1560	192.3	631.4	315.7	157.8	157.8
1570	191.1	626.8	313.4	156.7	156.7
1580	189.9	623.2	311.6	155.8	155.8
1590	188.7	618.9	309.4	154.7	154.7
1600	187.5	615.0	307.5	153.7	153.7

550 kHz TO 1070 kHz					
kHz	METERS	1 WAVE	1/2 WAVE	1/4 WAVE	1/4 WAVE
550	545	1787.6	893.8	446.8	446.8
560	536	1758.0	879.0	439.5	439.5
570	526	1725.3	862.6	431.3	431.3
580	517	1695.7	847.8	423.9	423.9
590	509	1669.5	834.7	417.3	417.3
600	500	1640.0	820.0	410.0	410.0
610	492	1612.7	806.3	403.1	403.1
620	484	1587.5	799.1	396.8	396.8
630	476	1561.2	780.6	390.3	390.3
640	469	1546.3	773.1	386.5	386.5
650	462	1515.3	757.6	378.8	378.8
660	455	1492.4	746.2	373.1	373.1
670	448	1469.4	734.7	367.3	367.3
680	441	1446.4	723.2	361.1	361.1
690	435	1426.8	713.4	356.2	356.2
700	429	1407.1	703.5	351.2	351.2
710	423	1387.4	693.7	346.8	346.8
720	417	1367.7	683.8	341.9	341.9
730	411	1348.0	674.0	337.0	337.0
740	405	1328.4	664.2	332.1	332.1
750	400	1312.0	656.0	328.0	328.0
760	395	1295.6	647.8	323.4	323.4
770	390	1279.2	639.6	319.8	319.8
780	385	1262.8	631.4	315.7	315.7
790	380	1246.4	623.2	311.6	311.6
800	375	1230.0	615.0	307.5	307.5
810	370	1213.6	606.8	303.4	303.4
820	366	1200.4	600.2	300.1	300.1
830	361	1184.0	592.0	296.0	296.0
840	357	1170.9	585.4	292.7	292.7
850	353	1157.8	578.9	289.4	289.4
860	349	1144.7	572.3	286.1	286.1
870	345	1131.6	565.8	282.9	282.9
880	341	1118.4	559.2	279.6	279.6
890	337	1105.3	552.6	276.3	276.3
900	333	1092.2	546.1	273.0	273.0
910	330	1082.4	541.2	270.6	270.6
920	326	1069.2	534.6	267.3	267.3
930	323	1059.4	529.7	264.8	264.8
940	319	1046.3	523.1	261.5	261.5
950	316	1036.4	518.2	259.1	259.1
960	313	1026.6	513.3	256.6	256.6
970	309	1013.5	506.7	253.3	253.3
980	306	1003.6	501.8	250.9	250.9
990	303	993.8	496.9	248.4	248.4
1000	300	984.0	492.0	246.0	246.0
1010	297	974.1	487.5	243.7	243.7
1020	294.1	964.6	482.3	241.1	241.1
1030	291.3	955.3	477.6	238.8	238.8
1040	288.5	946.2	473.1	236.5	236.5
1050	285.7	937.1	468.5	234.2	234.2
1060	283.0	928.2	464.1	232.0	232.0
1070	280.4	919.7	459.8	229.9	229.9

REFERENCE DATA

dB/EFFICIENCY CONVERSION CHART

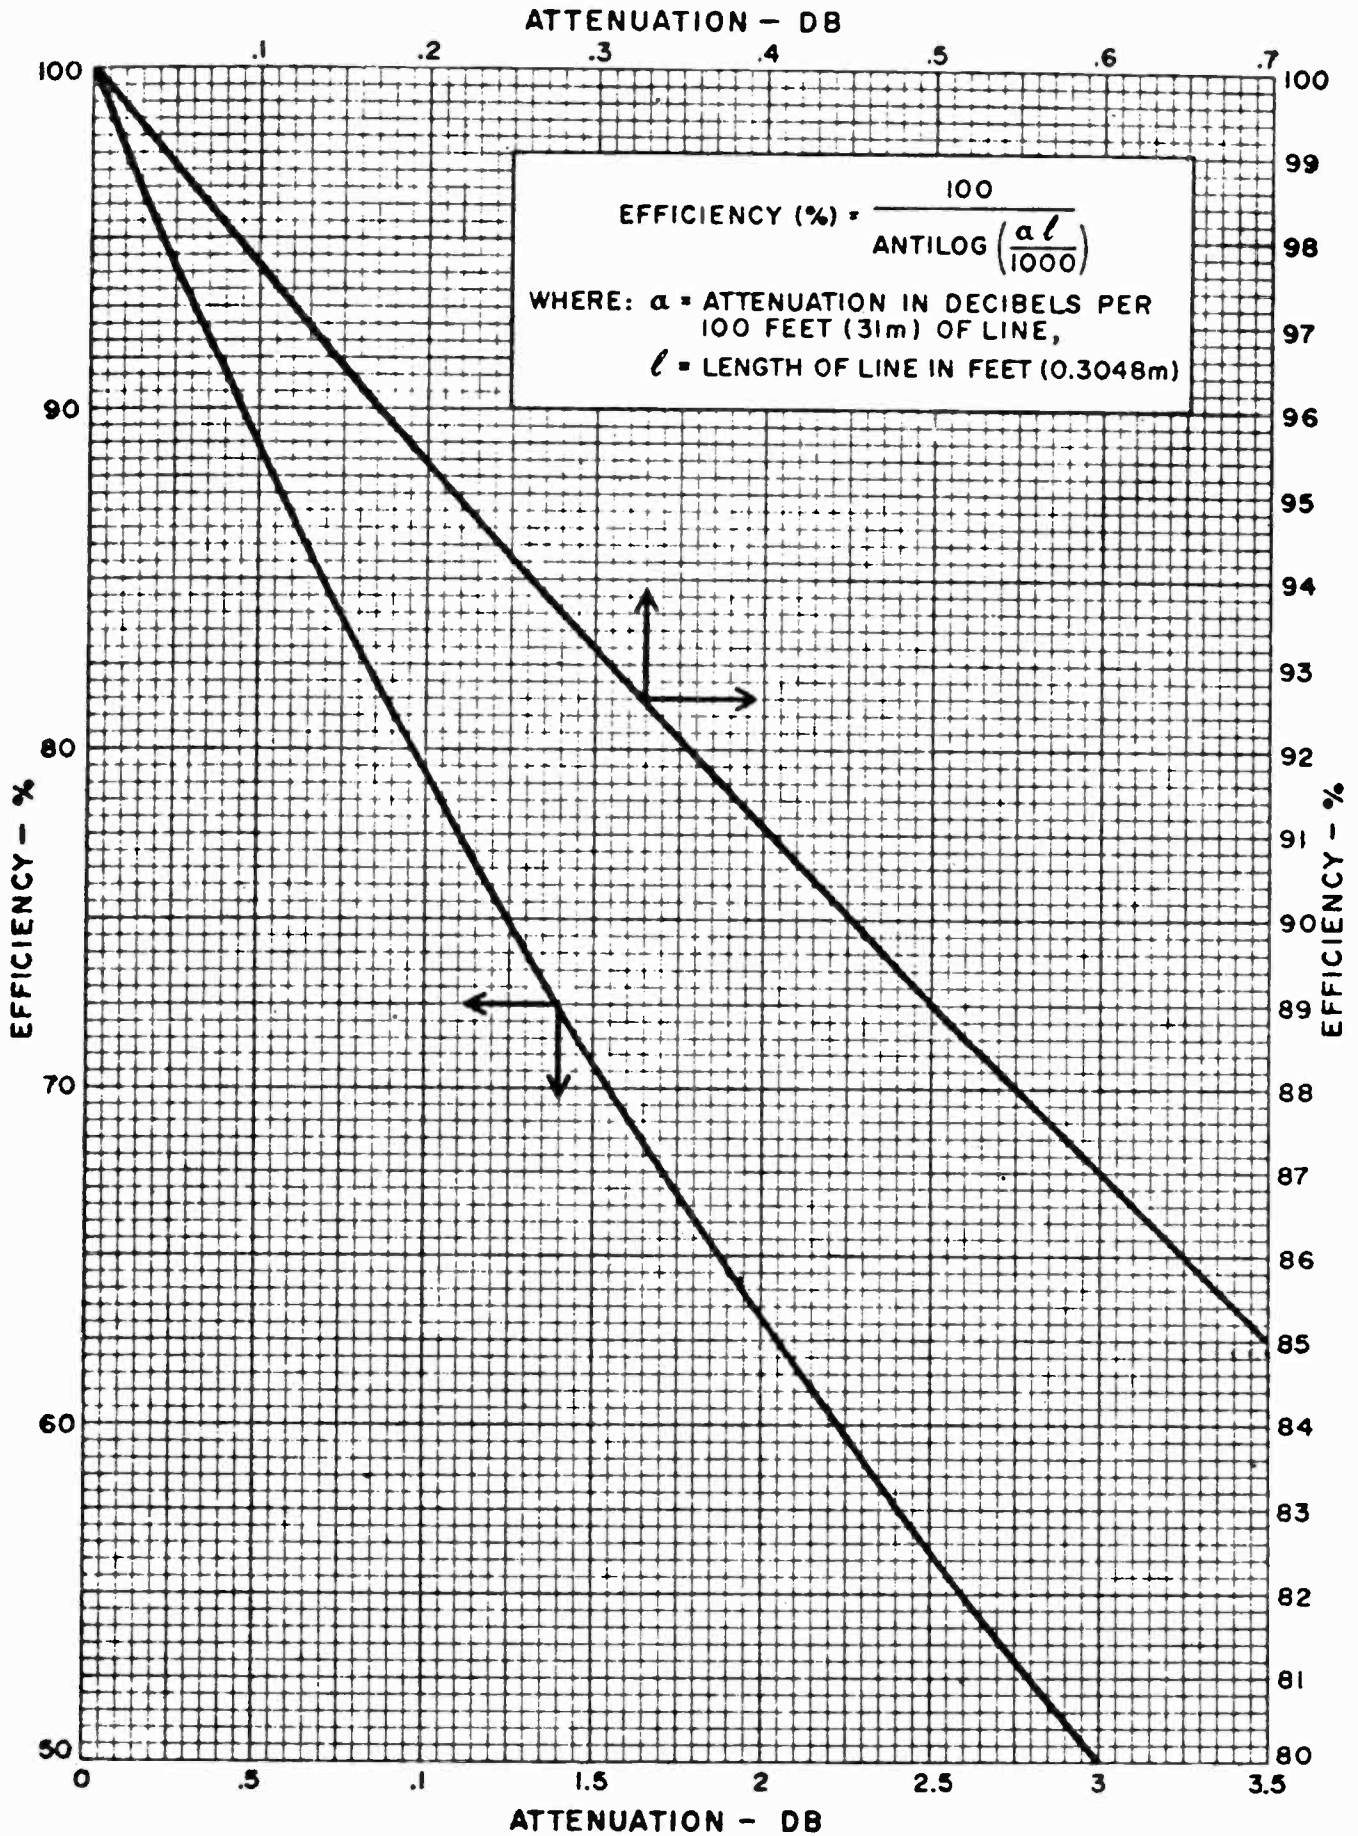

REFERENCE DATA

KILOWATTS VERSUS dBk CONVERSION TABLE

kW	dBk	kW	dBk	kW	dBk	kW	dBk	kW	dBk	kW	dBk	kW	dBk
0.5	-3.00	8.2	9.14	15.9	12.01	23.6	13.73	31.3	14.95	39.0	15.91	46.7	16.69
0.6	-2.20	8.3	9.19	16.0	12.04	23.7	13.75	31.4	14.97	39.1	15.92	46.8	16.70
0.7	-1.52	8.4	9.24	16.1	12.07	23.8	13.77	31.5	14.98	39.2	15.93	46.9	16.71
0.8	-0.96	8.5	9.29	16.2	12.09	23.9	13.78	31.6	15.00	39.3	15.94	47.0	16.72
0.9	-0.45	8.6	9.34	16.3	12.12	24.0	13.80	31.7	15.01	39.4	15.95	47.1	16.73
1.0	0.00	8.7	9.39	16.4	12.15	24.1	13.82	31.8	15.02	39.5	15.97	47.2	16.74
1.1	0.41	8.8	9.44	16.5	12.17	24.2	13.84	31.9	15.04	39.6	15.98	47.3	16.75
1.2	0.79	8.9	9.49	16.6	12.20	24.3	13.86	32.0	15.05	39.7	15.99	47.4	16.76
1.3	1.14	9.0	9.54	16.7	12.23	24.4	13.87	32.1	15.06	39.8	16.00	47.5	16.77
1.4	1.46	9.1	9.59	16.8	12.25	24.5	13.89	32.2	15.08	39.9	16.01	47.6	16.78
1.5	1.76	9.2	9.64	16.9	12.28	24.6	13.91	32.3	15.09	40.0	16.02	47.7	16.78
1.6	2.04	9.3	9.68	17.0	12.30	24.7	13.93	32.4	15.10	40.1	16.03	47.8	16.79
1.7	2.30	9.4	9.73	17.1	12.33	24.8	13.94	32.5	15.12	40.2	16.04	47.9	16.80
1.8	2.55	9.5	9.78	17.2	12.35	24.9	13.96	32.6	15.13	40.3	16.05	48.0	16.81
1.9	2.79	9.6	9.82	17.3	12.38	25.0	13.98	32.7	15.14	40.4	16.06	48.1	16.82
2.0	3.01	9.7	9.87	17.4	12.40	25.1	14.00	32.8	15.16	40.5	16.07	48.2	16.83
2.1	3.22	9.8	9.91	17.5	12.43	25.2	14.01	32.9	15.17	40.6	16.08	48.3	16.84
2.2	3.42	9.9	9.96	17.6	12.45	25.3	14.03	33.0	15.18	40.7	16.10	48.4	16.85
2.3	3.62	10.0	10.00	17.7	12.48	25.4	14.05	33.1	15.20	40.8	16.11	48.5	16.86
2.4	3.80	10.1	10.04	17.8	12.50	25.5	14.06	33.2	15.21	40.9	16.12	48.6	16.87
2.5	3.98	10.2	10.09	17.9	12.53	25.6	14.08	33.3	15.22	41.0	16.13	48.7	16.87
2.6	4.15	10.3	10.13	18.0	12.55	25.7	14.10	33.4	15.24	41.1	16.14	48.8	16.88
2.7	4.31	10.4	10.17	18.1	12.58	25.8	14.12	33.5	15.25	41.2	16.15	48.9	16.89
2.8	4.47	10.5	10.21	18.2	12.60	25.9	14.13	33.6	15.26	41.3	16.16	49.0	16.90
2.9	4.62	10.6	10.25	18.3	12.62	26.0	14.15	33.7	15.28	41.4	16.17	49.1	16.91
3.0	4.77	10.7	10.29	18.4	12.65	26.1	14.17	33.8	15.29	41.5	16.18	49.2	16.92
3.1	4.91	10.8	10.33	18.5	12.67	26.2	14.18	33.9	15.30	41.6	16.19	49.3	16.93
3.2	5.05	10.9	10.37	18.6	12.69	26.3	14.20	34.0	15.31	41.7	16.20	49.4	16.94
3.3	5.18	11.0	10.41	18.7	12.72	26.4	14.22	34.1	15.33	41.8	16.21	49.5	16.95
3.4	5.31	11.1	10.45	18.8	12.74	26.5	14.23	34.2	15.34	41.9	16.22	49.6	16.95
3.5	5.44	11.2	10.49	18.9	12.76	26.6	14.25	34.3	15.35	42.0	16.23	49.7	16.96
3.6	5.56	11.3	10.53	19.0	12.79	26.7	14.26	34.4	15.37	42.1	16.24	49.8	16.97
3.7	5.68	11.4	10.57	19.1	12.81	26.8	14.28	34.5	15.38	42.2	16.25	49.9	16.98
3.8	5.79	11.5	10.61	19.2	12.83	26.9	14.30	34.6	15.39	42.3	16.26	50.0	16.99
3.9	5.91	11.6	10.64	19.3	12.86	27.0	14.31	34.7	15.40	42.4	16.27	50.1	17.00
4.0	6.02	11.7	10.68	19.4	12.88	27.1	14.33	34.8	15.42	42.5	16.28	50.2	17.01
4.1	6.13	11.8	10.72	19.5	12.90	27.2	14.35	34.9	15.43	42.6	16.29	50.3	17.02
4.2	6.23	11.9	10.75	19.6	12.92	27.3	14.36	35.0	15.44	42.7	16.30	50.4	17.02
4.3	6.33	12.0	10.79	19.7	12.94	27.4	14.38	35.1	15.45	42.8	16.31	50.5	17.03
4.4	6.43	12.1	10.83	19.8	12.97	27.5	14.39	35.2	15.46	42.9	16.32	50.6	17.04
4.5	6.53	12.2	10.86	19.9	12.99	27.6	14.41	35.3	15.48	43.0	16.33	50.7	17.05
4.6	6.63	12.3	10.90	20.0	13.01	27.7	14.42	35.4	15.49	43.1	16.34	50.8	17.06
4.7	6.72	12.4	10.93	20.1	13.03	27.8	14.44	35.5	15.50	43.2	16.35	50.9	17.07
4.8	6.81	12.5	10.97	20.2	13.05	27.9	14.46	35.6	15.51	43.3	16.36	51.0	17.08
4.9	6.90	12.6	11.00	20.3	13.07	28.0	14.47	35.7	15.53	43.4	16.37	51.1	17.08
5.0	6.99	12.7	11.04	20.4	13.10	28.1	14.49	35.8	15.54	43.5	16.38	51.2	17.09
5.1	7.08	12.8	11.07	20.5	13.12	28.2	14.50	35.9	15.55	43.6	16.39	51.3	17.10
5.2	7.16	12.9	11.11	20.6	13.14	28.3	14.52	36.0	15.56	43.7	16.40	51.4	17.11
5.3	7.24	13.0	11.14	20.7	13.16	28.4	14.53	36.1	15.57	43.8	16.41	51.5	17.12
5.4	7.32	13.1	11.17	20.8	13.18	28.5	14.55	36.2	15.59	43.9	16.42	51.6	17.13
5.5	7.40	13.2	11.21	20.9	13.20	28.6	14.56	36.3	15.60	44.0	16.43	51.7	17.13
5.6	7.48	13.3	11.24	21.0	13.22	28.7	14.58	36.4	15.61	44.1	16.44	51.8	17.14
5.7	7.56	13.4	11.27	21.1	13.24	28.8	14.59	36.5	15.62	44.2	16.45	51.9	17.15
5.8	7.63	13.5	11.30	21.2	13.26	28.9	14.61	36.6	15.63	44.3	16.46	52.0	17.16
5.9	7.71	13.6	11.33	21.3	13.28	29.0	14.62	36.7	15.65	44.4	16.47	52.1	17.17
6.0	7.78	13.7	11.37	21.4	13.30	29.1	14.64	36.8	15.66	44.5	16.48	52.2	17.18
6.1	7.85	13.8	11.40	21.5	13.32	29.2	14.65	36.9	15.67	44.6	16.49	52.3	17.18
6.2	7.92	13.9	11.43	21.6	13.34	29.3	14.67	37.0	15.68	44.7	16.50	52.4	17.19
6.3	7.99	14.0	11.46	21.7	13.36	29.4	14.68	37.1	15.69	44.8	16.51	52.5	17.20
6.4	8.06	14.1	11.49	21.8	13.38	29.5	14.70	37.2	15.70	44.9	16.52	52.6	17.21
6.5	8.13	14.2	11.52	21.9	13.40	29.6	14.71	37.3	15.72	45.0	16.53	52.7	17.22
6.6	8.19	14.3	11.55	22.0	13.42	29.7	14.73	37.4	15.73	45.1	16.54	52.8	17.23
6.7	8.26	14.4	11.58	22.1	13.44	29.8	14.74	37.5	15.74	45.2	16.55	52.9	17.23
6.8	8.32	14.5	11.61	22.2	13.46	29.9	14.76	37.6	15.75	45.3	16.56	53.0	17.24
6.9	8.39	14.6	11.64	22.3	13.48	30.0	14.77	37.7	15.76	45.4	16.57	53.1	17.25
7.0	8.45	14.7	11.67	22.4	13.50	30.1	14.79	37.8	15.77	45.5	16.58	53.2	17.26
7.1	8.51	14.8	11.70	22.5	13.52	30.2	14.80	37.9	15.79	45.6	16.59	53.3	17.27
7.2	8.57	14.9	11.73	22.6	13.54	30.3	14.81	38.0	15.80	45.7	16.60	53.4	17.27
7.3	8.63	15.0	11.76	22.7	13.56	30.4	14.83	38.1	15.81	45.8	16.61	53.5	17.28
7.4	8.69	15.1	11.79	22.8	13.58	30.5	14.84	38.2	15.82	45.9	16.62	53.6	17.29
7.5	8.75	15.2	11.82	22.9	13.60	30.6	14.86	38.3	15.83	46.0	16.63	53.7	17.30
7.6	8.81	15.3	11.85	23.0	13.62	30.7	14.87	38.4	15.84	46.1	16.64	53.8	17.31
7.7	8.86	15.4	11.87	23.1	13.64	30.8	14.89	38.5	15.85	46.2	16.65	53.9	17.32
7.8	8.92	15.5	11.90	23.2	13.65	30.9	14.90	38.6	15.87	46.3	16.66	54.0	17.32
7.9	8.97	15.6	11.93	23.3	13.67	31.0	14.91	38.7	15.88	46.4	16.66	54.1	17.33
8.0	9.03	15.7	11.96	23.4	13.69	31.1	14.93	38.8	15.89	46.5	16.67	54.2	17.34
8.1	9.08	15.8	11.99	23.5	13.71	31.2	14.94	38.9	15.90	46.6	16.68	54.3	17.35


REFERENCE DATA

KILOWATTS VERSUS dBk CONVERSION TABLE

kW	dBk	kW	dBk	kW	dBk	kW	dBk	kW	dBk	kW	dBk	kW	dBk
54.4	17.36	62.3	17.94	70.1	18.46	77.9	18.91	85.6	19.32	93.3	19.70	300	24.77
54.5	17.36	62.4	17.95	70.2	18.46	78.0	18.92	85.7	19.33	93.4	19.70	316	25.00
54.6	17.37	62.5	17.96	70.3	18.47	78.1	18.93	85.8	19.33	93.5	19.71	320	25.05
54.7	17.38	62.6	17.97	70.4	18.48	78.2	18.93	85.9	19.34	93.6	19.71	340	25.31
54.8	17.39	62.7	17.97	70.5	18.48	78.3	18.94	86.0	19.34	93.7	19.72	360	25.56
54.9	17.40	62.8	17.98	70.6	18.49	78.4	18.94	86.1	19.35	93.8	19.72	380	25.80
55.0	17.40	62.9	17.99	70.7	18.49	78.5	18.95	86.2	19.35	93.9	19.73	400	26.02
55.1	17.41	63.0	17.99	70.8	18.50	78.6	18.95	86.3	19.36	94.0	19.73	420	26.23
55.2	17.42	63.1	18.00	70.9	18.51	78.7	18.96	86.4	19.36	94.1	19.74	440	26.43
55.3	17.43	63.2	18.01	71.0	18.51	78.8	18.96	86.5	19.37	94.2	19.74	460	26.63
55.4	17.43	63.3	18.01	71.1	18.52	78.9	18.97	86.6	19.37	94.3	19.74	480	26.81
55.5	17.44	63.4	18.02	71.2	18.52	79.0	18.98	86.7	19.38	94.4	19.75	500	26.99
55.6	17.45	63.5	18.03	71.3	18.53	79.1	18.98	86.8	19.38	94.5	19.75	520	27.16
55.7	17.46	63.6	18.03	71.4	18.54	79.2	18.99	86.9	19.39	94.6	19.76	540	27.32
55.8	17.47	63.7	18.04	71.5	18.54	79.3	18.99	87.0	19.39	94.7	19.76	560	27.48
55.9	17.47	63.8	18.05	71.6	18.55	79.4	19.00	87.1	19.40	94.8	19.77	580	27.63
56.0	17.48	63.9	18.05	71.7	18.55	79.5	19.00	87.2	19.40	94.9	19.77	600	27.78
56.1	17.49	64.0	18.06	71.8	18.56	79.6	19.01	87.3	19.41	95.0	19.78	620	27.92
56.2	17.50	64.1	18.07	71.9	18.57	79.7	19.01	87.4	19.41	95.1	19.78	640	28.06
56.3	17.50	64.2	18.07	72.0	18.57	79.8	19.02	87.5	19.42	95.2	19.79	660	28.19
56.4	17.51	64.3	18.08	72.1	18.58	79.9	19.02	87.6	19.42	95.3	19.79	680	28.32
56.5	17.52	64.4	18.09	72.2	18.58	80.0	19.03	87.7	19.43	95.4	19.79	700	28.45
56.6	17.53	64.5	18.10	72.3	18.59	80.1	19.04	87.8	19.43	95.5	19.80	720	28.57
56.7	17.54	64.6	18.10	72.4	18.60	80.2	19.04	87.9	19.44	95.6	19.80	740	28.69
56.8	17.54	64.7	18.11	72.5	18.60	80.3	19.05	88.0	19.44	95.7	19.81	760	28.81
56.9	17.55	64.8	18.12	72.6	18.61	80.4	19.05	88.1	19.45	95.8	19.81	780	28.92
57.0	17.56	64.9	18.12	72.7	18.61	80.5	19.06	88.2	19.45	95.9	19.82	800	29.03
57.1	17.57	65.0	18.13	72.8	18.62	80.6	19.06	88.3	19.46	96.0	19.82	820	29.14
57.2	17.57	65.1	18.14	72.9	18.63	80.7	19.07	88.4	19.46	96.1	19.83	840	29.24
57.3	17.58	65.2	18.14	73.0	18.63	80.8	19.07	88.5	19.47	96.2	19.83	860	29.34
57.4	17.59	65.3	18.15	73.1	18.64	80.9	19.08	88.6	19.47	96.3	19.84	880	29.44
57.5	17.60	65.4	18.16	73.2	18.64	81.0	19.08	88.7	19.48	96.4	19.84	900	29.54
57.6	17.60	65.5	18.16	73.3	18.65	81.1	19.09	88.8	19.48	96.5	19.84	920	29.64
57.7	17.61	65.6	18.17	73.4	18.66	81.2	19.10	88.9	19.49	96.6	19.85	940	29.73
57.8	17.62	65.7	18.18	73.5	18.66	81.3	19.10	89.0	19.49	96.7	19.85	960	29.82
57.9	17.63	65.8	18.18	73.6	18.67	81.4	19.11	89.1	19.50	96.8	19.86	980	29.91
58.0	17.63	65.9	18.19	73.7	18.67	81.5	19.11	89.2	19.50	96.9	19.86	1000	30.00
58.1	17.64	66.0	18.19	73.8	18.68	81.6	19.12	89.3	19.51	97.0	19.87	1100	30.41
58.2	17.65	66.1	18.20	73.9	18.69	81.7	19.12	89.4	19.51	97.1	19.87	1200	30.79
58.3	17.66	66.2	18.21	74.0	18.69	81.8	19.13	89.5	19.52	97.2	19.88	1300	31.14
58.4	17.66	66.3	18.21	74.1	18.70	81.9	19.13	89.6	19.52	97.3	19.88	1400	31.46
58.5	17.67	66.4	18.22	74.2	18.70	82.0	19.14	89.7	19.53	97.4	19.89	1500	31.76
58.6	17.68	66.5	18.23	74.3	18.71	82.1	19.14	89.8	19.53	97.5	19.89	1600	32.04
58.7	17.69	66.6	18.23	74.4	18.72	82.2	19.15	89.9	19.54	97.6	19.89	1700	32.30
58.8	17.69	66.7	18.24	74.5	18.72	82.3	19.15	90.0	19.54	97.7	19.90	1800	32.55
58.9	17.70	66.8	18.25	74.6	18.73	82.4	19.16	90.1	19.55	97.8	19.90	1900	32.79
59.0	17.71	66.9	18.25	74.7	18.73	82.5	19.16	90.2	19.55	97.9	19.91	2000	33.01
59.1	17.72	67.0	18.26	74.8	18.74	82.6	19.17	90.3	19.56	98.0	19.91	2100	33.22
59.2	17.72	67.1	18.27	74.9	18.74	82.7	19.17	90.4	19.56	98.1	19.92	2200	33.42
59.3	17.73	67.2	18.27	75.0	18.75	82.8	19.18	90.5	19.57	98.2	19.92	2300	33.62
59.4	17.74	67.3	18.28	75.1	18.76	82.9	19.19	90.6	19.57	98.3	19.93	2400	33.80
59.5	17.74	67.4	18.29	75.2	18.76	83.0	19.19	90.7	19.58	98.4	19.93	2500	33.98
59.6	17.75	67.5	18.29	75.3	18.77	83.1	19.20	90.8	19.58	98.5	19.93	2600	34.15
59.7	17.76	67.6	18.30	75.4	18.77	83.2	19.20	90.9	19.59	98.6	19.94	2700	34.31
59.8	17.77	67.7	18.31	75.5	18.78	83.3	19.21	91.0	19.59	98.7	19.94	2800	34.47
59.9	17.77	67.8	18.31	75.6	18.78	83.4	19.21	91.1	19.59	98.8	19.95	2900	34.62
60.0	17.78	67.9	18.32	75.7	18.79	83.5	19.22	91.2	19.60	98.9	19.95	3000	34.77
60.1	17.79	68.0	18.32	75.8	18.80	83.6	19.22	91.3	19.60	99.0	19.96	3100	34.91
60.2	17.80	68.1	18.33	75.9	18.80	83.7	19.23	91.4	19.61	99.1	19.96	3200	35.05
60.3	17.80	68.2	18.34	76.0	18.81	83.8	19.23	91.5	19.61	99.2	19.96	3300	35.18
60.4	17.81	68.3	18.34	76.1	18.81	83.9	19.24	91.6	19.62	99.3	19.97	3400	35.31
60.5	17.82	68.4	18.35	76.2	18.82	84.0	19.24	91.7	19.62	99.4	19.97	3500	35.44
60.6	17.82	68.5	18.36	76.3	18.82	84.1	19.25	91.8	19.63	99.5	19.98	3600	35.56
60.7	17.83	68.6	18.36	76.4	18.83	84.2	19.25	91.9	19.63	99.6	19.98	3700	35.68
60.8	17.84	68.7	18.37	76.5	18.84	84.3	19.26	92.0	19.64	99.7	19.99	3800	35.80
60.9	17.85	68.8	18.38	76.6	18.84	84.4	19.26	92.1	19.64	99.8	19.99	3900	35.91
61.0	17.85	68.9	18.38	76.7	18.85	84.5	19.27	92.2	19.65	99.9	20.00	4000	36.02
61.1	17.86	69.0	18.39	76.8	18.85	84.6	19.27	92.3	19.65	100	20.00	4100	36.13
61.2	17.87	69.1	18.39	76.9	18.86	84.7	19.28	92.4	19.66	120	20.79	4200	36.23
61.3	17.87	69.2	18.40	77.0	18.86	84.8	19.28	92.5	19.66	140	21.46	4300	36.33
61.4	17.88	69.3	18.41	77.1	18.87	84.9	19.29	92.6	19.67	160	22.04	4400	36.43
61.5	17.89	69.4	18.41	77.2	18.88	85.0	19.29	92.7	19.67	180	22.55	4500	36.53
61.6	17.90	69.5	18.42	77.3	18.88	85.1	19.30	92.8	19.67	200	23.01	4600	36.63
61.8	17.91	69.6	18.43	77.4	18.89	85.2	19.30	92.9	19.68	220	23.42	4700	36.72
61.9	17.92	69.7	18.43	77.5	18.89	85.3	19.31	93.0	19.68	240	23.80	4800	36.81
62.0	17.92	69.8	18.44	77.6	18.90	85.4	19.31	93.1	19.69	260	24.15	4900	36.90
62.1	17.93	69.9	18.44	77.7	18.90	85.5	19.32	93.2	19.69	280	24.47	5000	36.99
62.2	17.94	70.0	18.45	77.8	18.91								

REFERENCE DATA

FM TRANSMITTER EQUIPMENT LAYOUTS

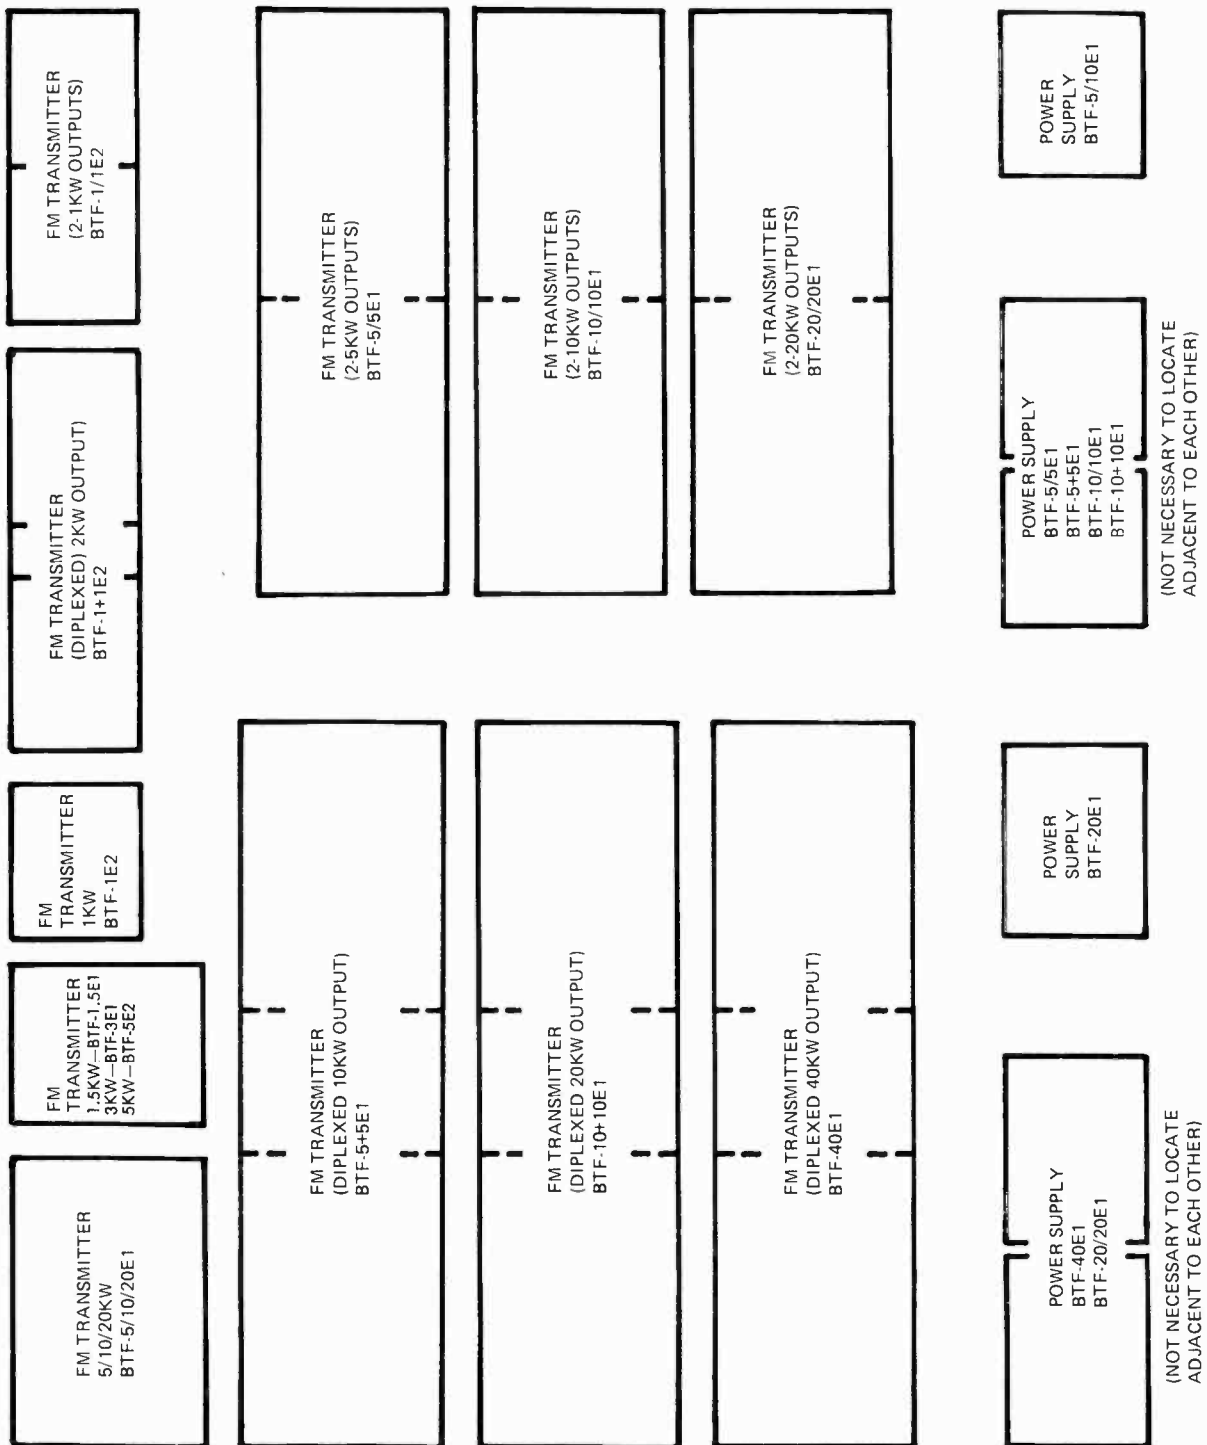

FM Transmitter Floor Plans


- BTF-1E2
- BTF-1.5E1
- BTF-3E1
- BTF-5E2
- BTF-5E1
- BTF-10E1
- BTF-20E1
- BTF-40E1

DRAWINGS NOT CERTIFIED FOR CONSTRUCTION USE

SCALE: 3/8 INCH = ONE FOOT

REFERENCE DATA

AM TRANSMITTER EQUIPMENT LAYOUTS

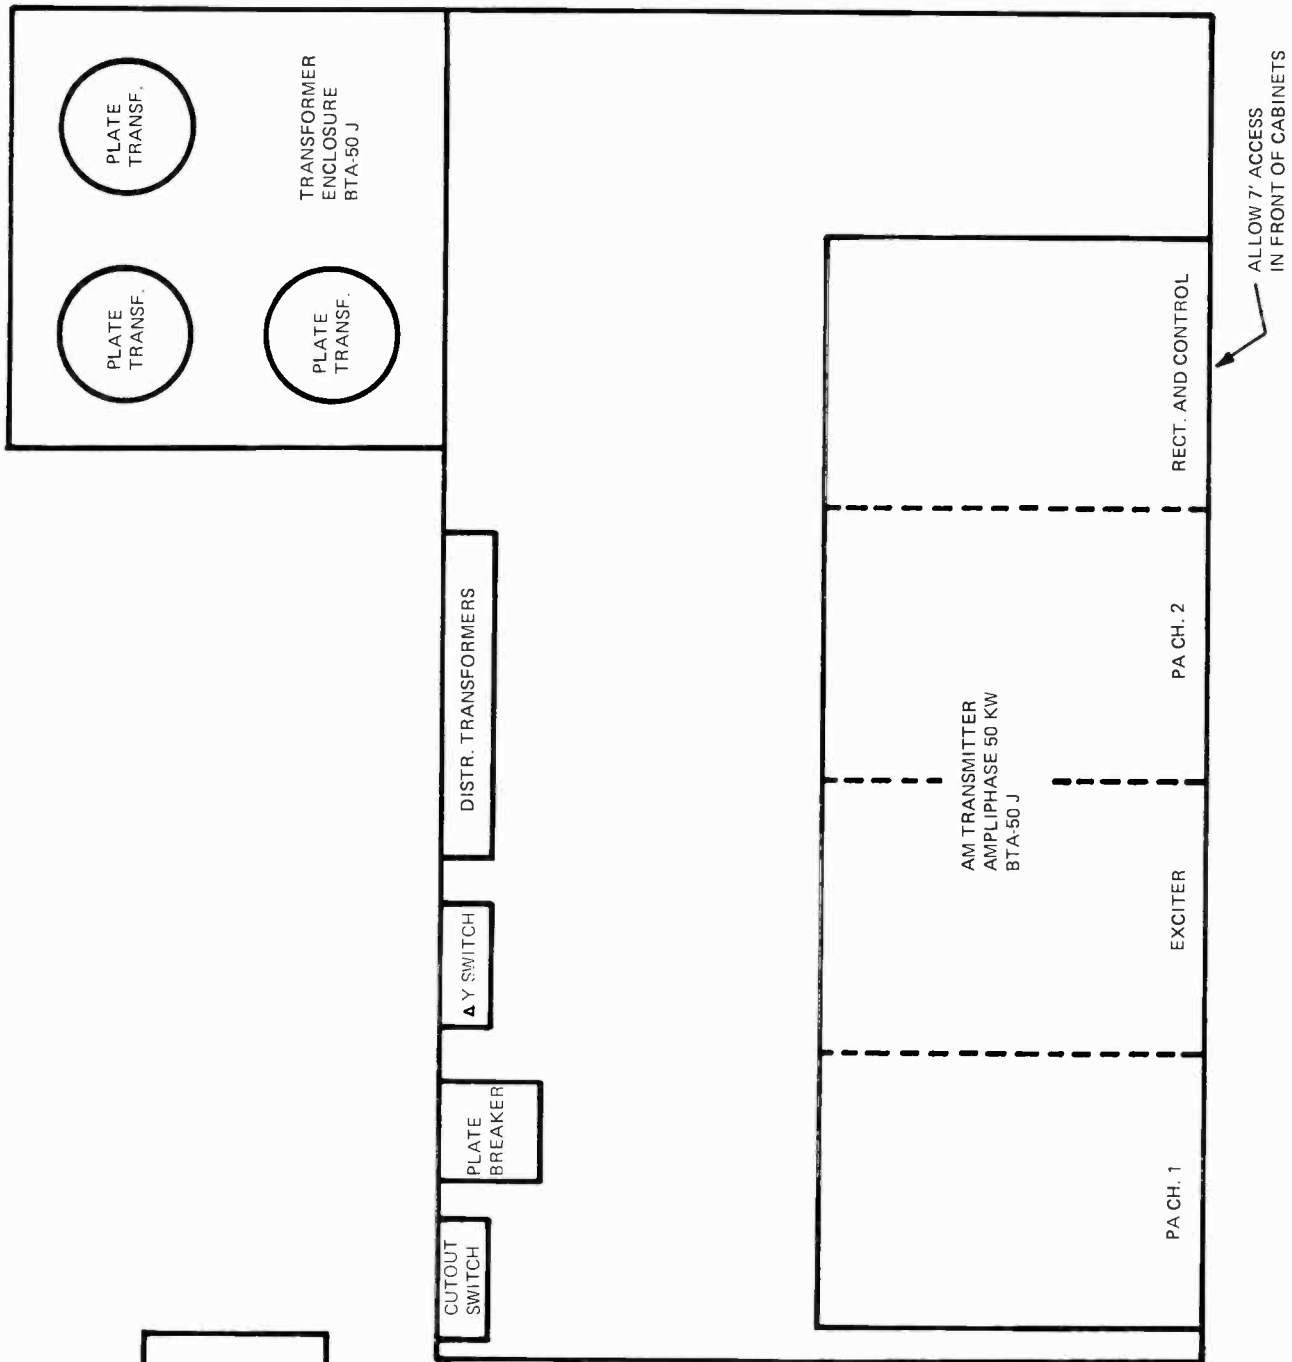


AM Transmitter Floor Plans
 BTA-1N1
 BTA-1S
 BTA-5L1
 BTA-10L1
 BTA-50J

SCALE: 3/8 INCH = ONE FOOT

DRAWINGS NOT CERTIFIED FOR CONSTRUCTION USE

REFERENCE DATA

AM TRANSMITTER EQUIPMENT LAYOUTS

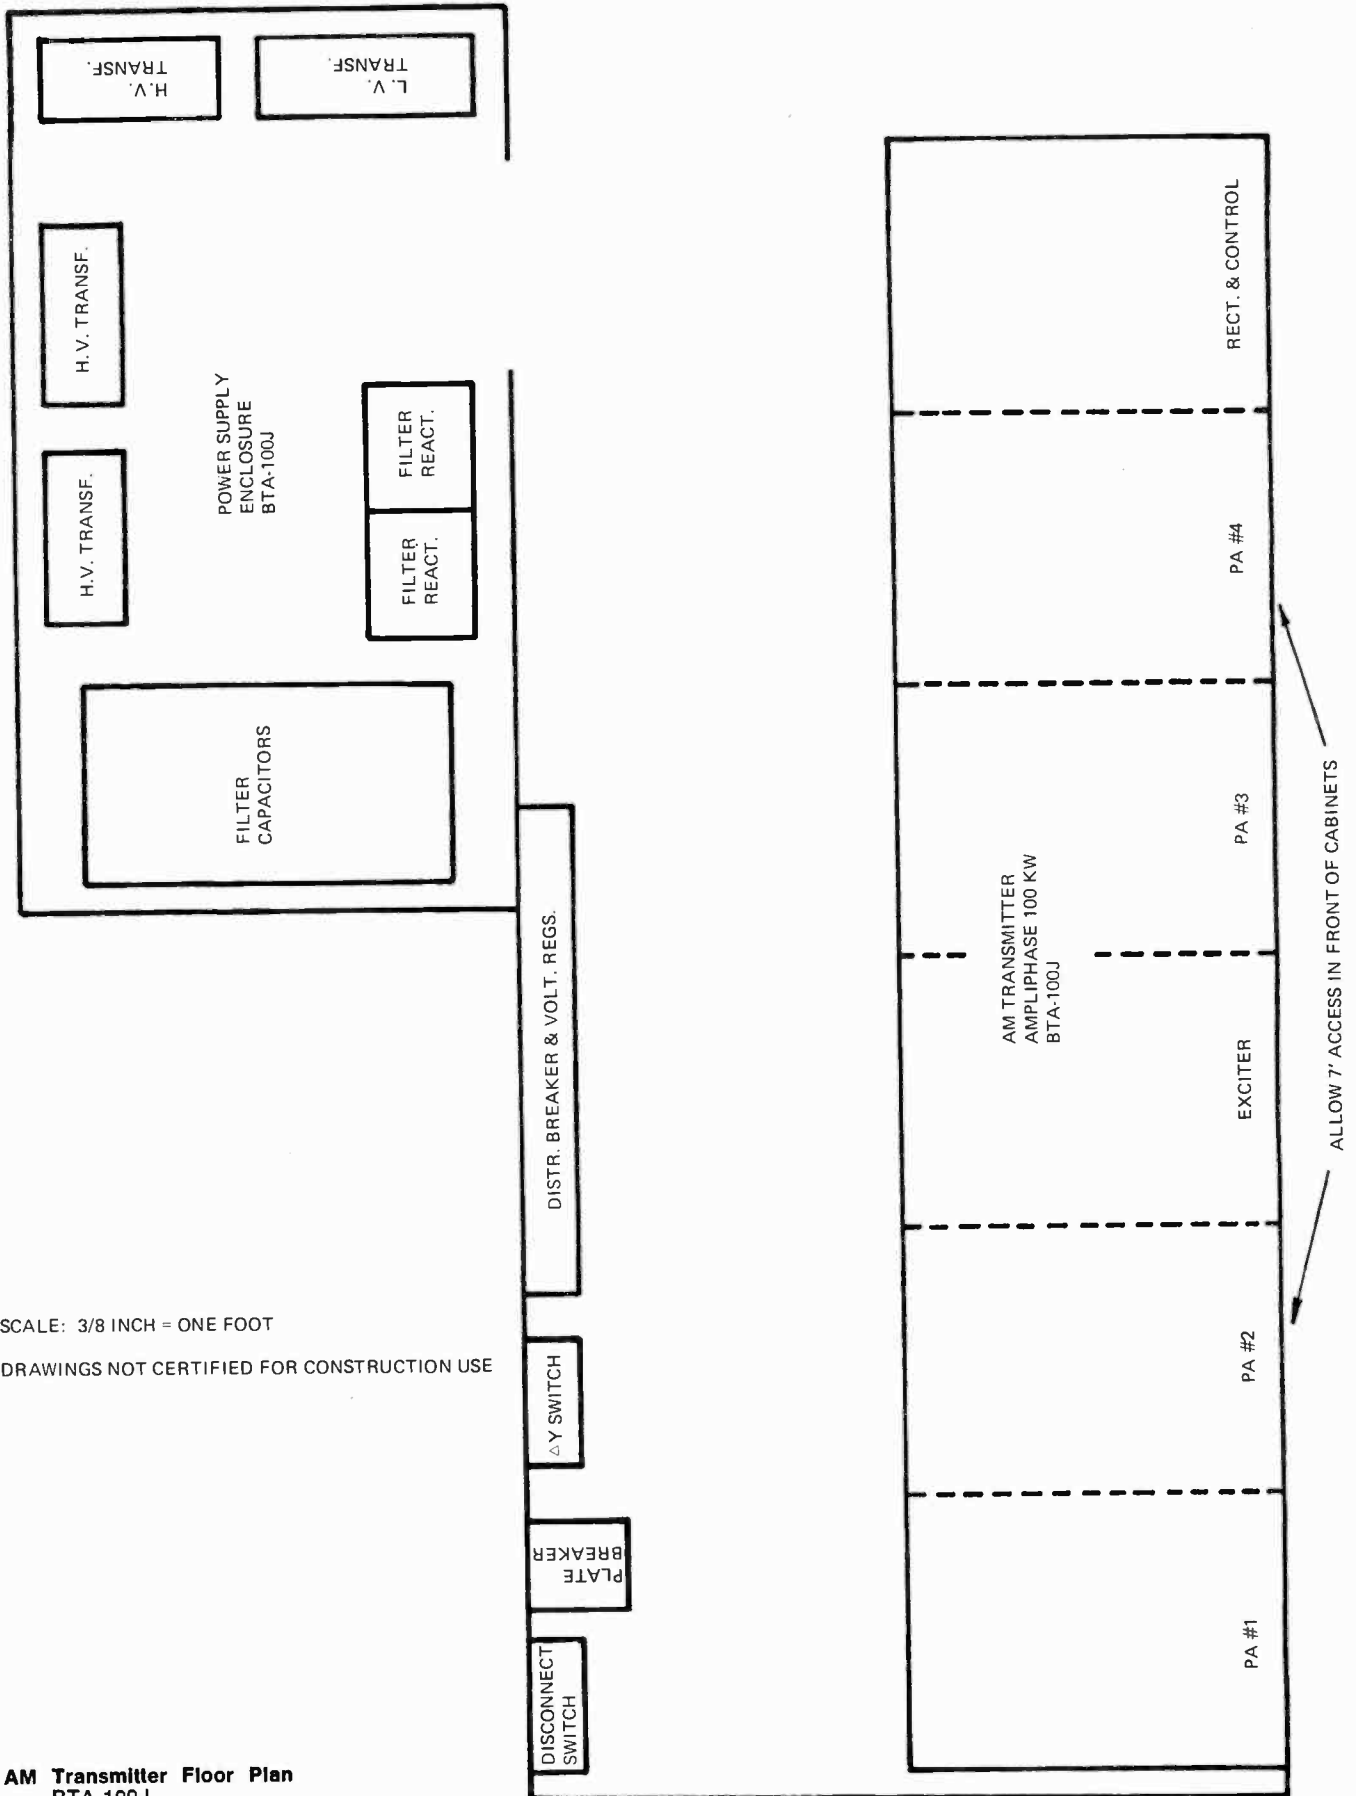

AM Transmitter Floor Plan
BTA-100J

≡ NOTES ≡

== NOTES ==

RCA Broadcast
Systems