

Radio Editors of magazines and newspapers are hereby given permission to reprint in whole or in part, with proper credit to the Aerovox Corporation, the contents of this issue of the Aerovox Research Worker.

The AEROVOX

Research Worker

The Aerovox Research Worker is a monthly house organ of the Aerovox Corporation. It is published to bring to the Radio Experimenter and Engineer authoritative, first hand information on condensers and resistances for radio work.

VOL. 16, NO. 12

DECEMBER, 1944

50c per year in U.S.A.
60c per year in Canada

Design Data for *m*-Derived Type Filters

PART IX

By the Engineering Department, Aerovox Corporation

THE CIRCUIT Components Chart accompanying this article lists all capacitor and inductor values for *shunt-derived* band-suppression filter sections for twenty-three convenient mid frequencies from 100 cycles to 10 megacycles and twelve common bandwidths from 0.05 to 0.9. The constants may be taken directly from this chart, without having to make computations of any sort, when working with the specified mid frequencies and bandwidths. When the filter section is to operate at bandwidths or mid frequencies other than those listed, simple computations may be performed to obtain required values from those listed in the chart.

All chart listings are in henries and microfarads, except in the last three columns. In the 100-kc. column, listings are in millihenries and microfarads. In the 1- and 10-Mc. columns, listings are in millihenries and micromicrofarads.

As in the case of the series-derived sections (described in the last installment of this series of articles) and of band-pass sections, component values given in the chart have been calculated for a characteristic impedance of 500 ohms. However, L and C values corresponding to mid frequencies and characteristic impedances other than those specified in the chart may be obtained by interpolation. All component values so

obtained will be inversely proportional to the new mid frequencies. The inductance values will be directly proportional and the capacitance values inversely proportional to the new characteristic impedance.

In determining values for operating conditions other than those specified by the chart, first locate on the chart the L and C values corresponding to 500 ohms impedance.

Values corresponding to the desired new impedance of R ohms will then be equal to the 500-ohm inductance multiplied by R/500, and the 500-ohm capacitance value divided by R/500.

Circuit diagram of the shunt-derived band-suppression filter section is given in Figure 8 (originally published in Part I, September-October 1942 issue).

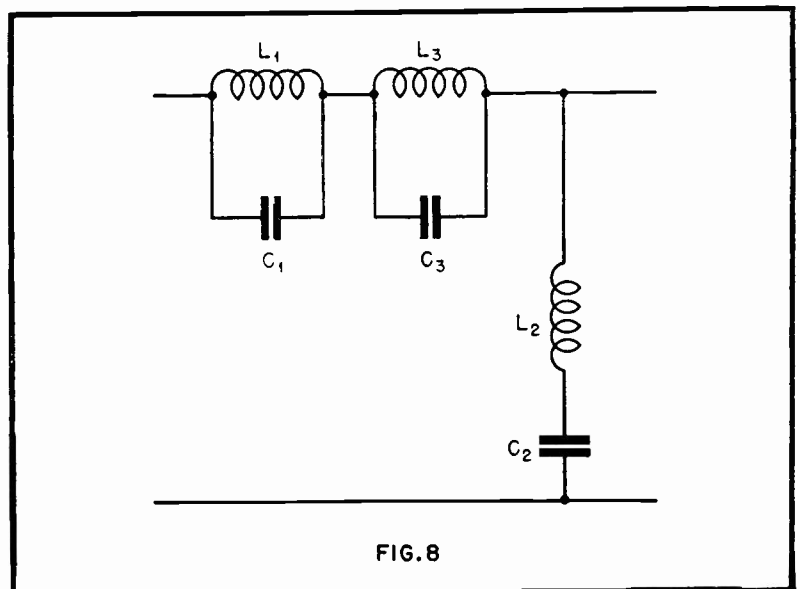


FIG. 8

AEROVOX PRODUCTS ARE BUILT BETTER



CHART 7 — Shunt-Derived Band-Suppression Filters (R=500 Ohms)


Band Width	$f_m = 100$	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	
0.05	L ₁	0.0408	0.00408	0.00272	0.00204	0.00163	0.00268	0.00115	0.00102	0.003906	0.000816	0.000738	0.000677
	L ₂	7.58	0.758	0.5048	0.3790	0.3032	0.2524	0.2137	0.1895	0.1683	0.1516	0.1372	0.1258
	L ₃	0.0431	0.00431	0.00287	0.00215	0.00172	0.00143	0.00121	0.00108	0.000957	0.000862	0.00078	0.000715
	C ₁	59.1	5.91	3.936	2.455	2.364	1.968	1.667	1.477	1.312	1.182	1.069	0.9811
	C ₂	0.335	0.0335	0.0223	0.0167	0.0134	0.0111	0.0094	0.00837	0.00744	0.00670	0.00606	0.00556
	C ₃	62.2	6.22	4.142	3.110	2.488	2.071	1.754	1.555	1.381	1.244	1.126	1.032
0.1	L ₁	0.0555	0.00555	0.00369	0.00277	0.00222	0.00185	0.00156	0.00139	0.00123	0.00111	0.0010	0.000921
	L ₂	5.44	0.544	0.3623	0.2720	0.2176	0.1811	0.1534	0.1360	0.1207	0.1088	0.0985	0.0903
	L ₃	0.0613	0.00613	0.00408	0.00306	0.00245	0.00204	0.00173	0.00153	0.00136	0.00123	0.00111	0.00102
	C ₁	41.4	4.14	2.757	2.070	1.656	1.379	1.167	1.035	0.9191	0.8280	0.7493	0.6882
	C ₂	0.467	0.0467	0.0311	0.0233	0.0187	0.0155	0.0132	0.0117	0.0104	0.00934	0.00845	0.00775
	C ₃	45.8	4.58	3.0503	2.290	1.832	1.525	1.291	1.145	1.017	0.9160	0.8289	0.7603
0.15	L ₁	0.0688	0.00688	0.00458	0.00344	0.00275	0.00229	0.00194	0.00172	0.00153	0.00138	0.00124	0.00114
	L ₂	4.27	0.427	0.2844	0.2135	0.1708	0.1422	0.1204	0.1067	0.0948	0.0854	0.0773	0.0709
	L ₃	0.0803	0.00803	0.00535	0.00401	0.00321	0.00267	0.00226	0.00201	0.00178	0.00161	0.00145	0.00133
	C ₁	31.7	3.17	2.111	1.585	1.268	1.056	0.8939	0.7925	0.7037	0.6340	0.5738	0.5262
	C ₂	0.594	0.0594	0.0396	0.0297	0.0237	0.0198	0.0167	0.0148	0.0132	0.0119	0.0107	0.00986
	C ₃	36.9	3.69	2.457	1.845	1.476	1.229	1.0406	0.9225	0.8192	0.7380	0.6679	0.6125
0.2	L ₁	0.0810	0.00810	0.00539	0.00405	0.00324	0.00269	0.00228	0.00202	0.00179	0.00162	0.00147	0.00134
	L ₂	3.53	0.353	0.2351	0.1765	0.1412	0.1175	0.0995	0.0882	0.0784	0.0706	0.0639	0.0586
	L ₃	0.0988	0.00988	0.00658	0.00494	0.00395	0.00329	0.00278	0.00247	0.00219	0.00198	0.00179	0.00164
	C ₁	25.7	2.57	1.712	1.285	1.028	0.8558	0.7247	0.6425	0.5705	0.5140	0.4652	0.4266
	C ₂	0.719	0.0719	0.0479	0.0359	0.0288	0.0239	0.0203	0.0179	0.0159	0.0144	0.0130	0.0119
	C ₃	31.3	3.13	2.084	1.565	1.252	1.042	0.8827	0.7825	0.6949	0.6260	0.5665	0.5196
0.25	L ₁	0.0925	0.00925	0.00616	0.00462	0.00370	0.00308	0.00261	0.00231	0.00205	0.00185	0.00167	0.00153
	L ₂	3.01	0.301	0.2008	0.1505	0.1204	0.1004	0.0849	0.0752	0.0668	0.0602	0.0545	0.0499
	L ₃	0.1190	0.01190	0.00792	0.00595	0.00476	0.00396	0.00335	0.00297	0.00266	0.00238	0.00215	0.00197
	C ₁	21.2	2.12	1.412	1.060	0.8480	0.7059	0.5978	0.5300	0.4706	0.4240	0.3837	0.3519
	C ₂	0.844	0.0844	0.0562	0.0422	0.0338	0.0281	0.0238	0.0211	0.0187	0.0169	0.0153	0.0140
	C ₃	27.5	2.75	1.831	1.375	1.100	0.9157	0.7755	0.6875	0.6105	0.5500	0.4977	0.4565
0.3	L ₁	0.1028	0.01028	0.00685	0.00514	0.00411	0.0034	0.00289	0.00257	0.00228	0.00206	0.00186	0.00171
	L ₂	2.63	0.263	0.1751	0.1315	0.1052	0.0875	0.0742	0.0657	0.0584	0.0526	0.0466	0.0436
	L ₃	0.1388	0.01388	0.00924	0.00694	0.00555	0.00462	0.00391	0.00347	0.00308	0.00278	0.0025	0.00230
	C ₁	18.32	1.832	1.220	0.9160	0.7228	0.6100	0.5166	0.4580	0.4067	0.3664	0.3116	0.3041
	C ₂	0.964	0.0964	0.0642	0.0482	0.0386	0.0321	0.0272	0.0241	0.0214	0.0193	0.0174	0.0160
	C ₃	24.7	2.47	1.645	1.235	0.9880	0.8225	0.6965	0.6175	0.5483	0.4940	0.4471	0.4100
0.4	L ₁	0.1205	0.01205	0.00802	0.00602	0.00482	0.00401	0.00339	0.00301	0.00267	0.00241	0.00218	0.0020
	L ₂	2.12	0.212	0.1412	0.1060	0.0848	0.0706	0.0598	0.0530	0.0470	0.0424	0.0384	0.0352
	L ₃	0.1800	0.01800	0.0119	0.0090	0.00720	0.00599	0.0051	0.0045	0.00399	0.00360	0.00306	0.00299
	C ₁	14.12	1.412	0.9404	0.7060	0.5648	0.4702	0.3982	0.3530	0.3135	0.2824	0.2556	0.2344
	C ₂	1.20	0.120	0.0799	0.0600	0.0480	0.0399	0.0338	0.0300	0.0266	0.0240	0.0217	0.0199
	C ₃	21.1	2.110	1.405	1.055	0.8440	0.7026	0.5950	0.5275	0.4684	0.4220	0.3819	0.3503
0.5	L ₁	0.1352	0.01352	0.0090	0.00676	0.00541	0.0045	0.00381	0.00338	0.00300	0.00270	0.00245	0.00224
	L ₂	1.778	0.1778	0.1184	0.0889	0.0711	0.0542	0.0501	0.0444	0.0395	0.0356	0.0322	0.0295
	L ₃	0.222	0.0222	0.0148	0.0111	0.00888	0.0074	0.00626	0.00555	0.00492	0.00449	0.00402	0.00368
	C ₁	11.44	1.144	0.7619	0.5720	0.4576	0.3809	0.3226	0.2860	0.2539	0.2284	0.2071	0.1899
	C ₂	1.427	0.1427	0.0950	0.0713	0.0571	0.0475	0.0402	0.0357	0.0317	0.0284	0.0258	0.0237
	C ₃	18.8	1.88	1.252	0.9400	0.7520	0.6260	0.5302	0.4700	0.4174	0.3760	0.3403	0.3121
0.6	L ₁	0.1470	0.01470	0.00979	0.00735	0.00588	0.00484	0.00414	0.00367	0.00326	0.00294	0.00266	0.00244
	L ₂	1.542	0.1542	0.1027	0.0771	0.0617	0.0513	0.0435	0.0385	0.0342	0.0308	0.0279	0.0251
	L ₃	0.266	0.0266	0.0177	0.0133	0.0106	0.00886	0.0075	0.00665	0.00590	0.00532	0.00481	0.00441
	C ₁	9.56	0.956	0.6367	0.4780	0.3824	0.3183	0.2696	0.2390	0.2122	0.1912	0.1720	0.1587
	C ₂	1.647	0.1647	0.1097	0.0823	0.0659	0.0548	0.0464	0.0412	0.0366	0.0329	0.0298	0.0273
	C ₃	17.28	1.728	1.151	0.8640	0.6912	0.5754	0.4673	0.4320	0.3836	0.3456	0.3128	0.2868
0.7	L ₁	0.1565	0.01565	0.0104	0.00782	0.00626	0.00521	0.00441	0.00391	0.00347	0.00313	0.00283	0.00259
	L ₂	1.360	0.1360	0.0906	0.0680	0.0544	0.0453	0.0383	0.0340	0.0302	0.0272	0.0246	0.0226
	L ₃	0.309	0.0309	0.0206	0.0154	0.0124	0.0103	0.00871	0.00772	0.00686	0.00618	0.00559	0.00513
	C ₁	8.20	0.820	0.5461	0.4100	0.3280	0.2731	0.2312	0.2050	0.1820	0.1640	0.1484	0.1361
	C ₂	1.867	0.1867	0.1243	0.0933	0.0747	0.0622	0.0525	0.0467	0.0414	0.0373	0.0348	0.0309
	C ₃	16.24	1.624	1.081	0.8120	0.6496	0.5408	0.4579	0.4060	0.3605	0.3248	0.2939	0.2696
0.8	L ₁	0.1638	0.01638	0.0109	0.00819	0.00655	0.00545	0.00462	0.00409	0.00364	0.00328	0.00296	0.00272
	L ₂	1.222	0.1222	0.0814	0.0611	0.0489	0.0407	0.0345	0.0305	0.0271	0.0244	0.0221	0.0203
	L ₃	0.357	0.0357	0.0238	0.0178	0.0143	0.0119	0.0101	0.00892	0.00792	0.00714	0.00646	0.00593
	C ₁	7.12	0.712	0.4742	0.3560	0.2848	0.2371	0.2008	0.1780	0.1581	0.1424	0.1289	0.1182
	C ₂	2.08	0.208	0.1385	0.1040	0.0832	0.0693	0.0586	0.0420	0.0462	0.0416	0.0376	0.345
	C ₃	15.52	1.552	1.034	0.7760	0.6208	0.5168	0.4377	0.3880	0.3445	0.3104	0.2809	0.2576
0.9	L ₁	0.1682	0.01682	0.0112	0.00841	0.00673	0.0056	0.0047	0.00420	0.00373	0.00336	0.00304	0.00279
	L ₂	1.110	0.1110	0.0739	0.0555	0.0444	0.0369	0.0313	0.0277	0.0246	0.022	0.0201	0.0184
	L ₃	0.403	0.0403	0.0268	0.0201	0.0161	0.0134	0.0114	0.0101	0.00895	0.0080	0.00729	0.00669
	C ₁	6.300	0.6300	0.4196	0.3150	0.2520	0.2098	0.1777	0.1575	0.1399	0.1260	0.1140	0.1046
	C ₂	2.29	0.229	0.1525	0.1145	0.0916	0.0762	0.0646	0.0572	0.0508	0.458	0.0414	0.0380
	C ₃	15.08	1.508	1.004	0.7540	0.6032	0.5022	0.4252	0.3770	0.3348	0.3016	0.2729	0.2503



CHART 7 — Shunt-Derived Band-Suppression Filters (R=500 Ohms)

Band Width	$f_m = 6500$	7000	7500	8000	8500	9000	9500	10 kc.	100 kc.	1 Mc.	10 Mc.	
0.05	L ₁	0.000624	0.000575	0.000542	0.000510	0.000477	0.000452	0.000428	0.000408	0.0408	0.000408	0.000408
	L ₂	0.1159	0.1069	0.1008	0.0947	0.0887	0.0841	0.0796	0.0758	7.58	0.758	0.0758
	L ₃	0.000659	0.000607	0.000573	0.000539	0.000504	0.000478	0.000452	0.000431	0.0431	0.00431	0.000431
	C ₁	0.9042	0.8333	0.7860	0.7387	0.6915	0.6560	0.6205	0.591	0.0591	5910.0	59.1
	C ₂	0.00512	0.00472	0.00445	0.00419	0.00392	0.00372	0.00352	0.00335	0.000335	33.5	3.35
	C ₃	0.9517	0.8770	0.8273	0.7775	0.7277	0.6904	0.6531	0.622	0.0622	6220	62.2
0.1	L ₁	0.000849	0.000782	0.000738	0.000694	0.000649	0.000616	0.000582	0.000555	0.0555	0.00555	0.000555
	L ₂	0.0832	0.0767	0.0723	0.0680	0.0636	0.0604	0.0571	0.0544	5.44	0.544	0.0544
	L ₃	0.000937	0.000864	0.000815	0.000766	0.000717	0.000680	0.000643	0.000613	0.0613	0.00613	0.000613
	C ₁	0.6334	0.5837	0.5506	0.5175	0.4844	0.4595	0.4347	0.414	0.0414	4140	41.4
	C ₂	0.00714	0.00658	0.00621	0.00584	0.00546	0.00518	0.00490	0.00467	0.000467	46.7	4.67
	C ₃	0.7007	0.6458	0.6091	0.5725	0.5359	0.5084	0.4809	0.458	0.0458	4580	45.8
0.15	L ₁	0.00105	0.000970	0.000915	0.000860	0.000804	0.000763	0.000722	0.000688	0.0688	0.00688	0.000688
	L ₂	0.0653	0.0602	0.0568	0.0534	0.0499	0.0474	0.0448	0.0427	4.27	0.427	0.0427
	L ₃	0.00123	0.00113	0.00107	0.00100	0.000939	0.000891	0.000843	0.000803	0.0803	0.00803	0.000803
	C ₁	0.4850	0.4469	0.4216	0.3962	0.3709	0.3519	0.3328	0.317	0.0317	3170	31.7
	C ₂	0.00909	0.00837	0.00790	0.00742	0.00695	0.00659	0.00624	0.00594	0.000594	59.4	5.94
	C ₃	0.5646	0.5203	0.4908	0.4612	0.4317	0.4096	0.3874	0.369	0.0369	3690	36.9
0.2	L ₁	0.00124	0.00114	0.00108	0.00101	0.000947	0.000899	0.000850	0.000810	0.0810	0.00810	0.000810
	L ₂	0.0540	0.0498	0.0469	0.0441	0.0413	0.0392	0.0371	0.0353	3.53	0.353	0.0353
	L ₃	0.00151	0.00139	0.00131	0.00123	0.00115	0.00109	0.00104	0.000988	0.0988	0.00988	0.000988
	C ₁	0.3932	0.3624	0.3418	0.3212	0.3007	0.2853	0.2698	0.257	0.0257	2570	25.7
	C ₂	0.0110	0.0101	0.00956	0.00898	0.00841	0.00798	0.00755	0.00719	0.000719	71.90	7.19
	C ₃	0.4789	0.4413	0.4163	0.3912	0.3662	0.3474	0.3286	0.313	0.0313	3130	31.3
0.25	L ₁	0.00141	0.00130	0.00123	0.00116	0.00108	0.00103	0.000971	0.000925	0.0925	0.00925	0.000925
	L ₂	0.0460	0.0424	0.0400	0.0376	0.0352	0.0334	0.0316	0.0301	3.010	0.3010	0.0301
	L ₃	0.00181	0.00168	0.00158	0.00149	0.00139	0.00132	0.00125	0.001190	0.119	0.0119	0.00119
	C ₁	0.3244	0.2989	0.2820	0.2650	0.2480	0.2353	0.2226	0.212	0.0212	2120	21.2
	C ₂	0.0129	0.0119	0.0112	0.0105	0.00987	0.00937	0.00886	0.00844	0.000844	84.40	8.44
	C ₃	0.4207	0.3877	0.3657	0.3437	0.3217	0.3052	0.2887	0.275	0.0275	2750	27.5
0.3	L ₁	0.00157	0.00145	0.00137	0.00128	0.00120	0.00114	0.00108	0.001028	0.1028	0.01028	0.001028
	L ₂	0.0402	0.0371	0.0349	0.0329	0.0308	0.0292	0.0276	0.0263	2.63	0.263	0.0263
	L ₃	0.0021	0.00196	0.00185	0.00173	0.00162	0.00154	0.00146	0.001388	0.1388	0.01388	0.001388
	C ₁	0.2803	0.2583	0.2436	0.2290	0.2143	0.2033	0.1924	0.1832	0.01832	183.2	18.32
	C ₂	0.0147	0.0136	0.0128	0.0120	0.0113	0.0107	0.0101	0.00964	0.000964	9.64	0.964
	C ₃	0.3779	0.3483	0.3285	0.3087	0.2889	0.2742	0.2593	0.247	0.0247	2470	24.7
0.4	L ₁	0.00184	0.00169	0.00160	0.00150	0.0014	0.00134	0.00126	0.001205	0.1205	0.01205	0.001205
	L ₂	0.0324	0.0299	0.0282	0.0265	0.0248	0.0235	0.0223	0.0212	2.12	0.212	0.0212
	L ₃	0.00275	0.00254	0.00239	0.00225	0.0021	0.00199	0.00189	0.00180	0.1800	0.0180	0.00180
	C ₁	0.2160	0.1991	0.1878	0.1765	0.1652	0.1567	0.1483	0.1412	0.01412	141.2	14.12
	C ₂	0.0184	0.0169	0.0159	0.0150	0.0140	0.0133	0.0126	0.0120	0.0012	120	12.0
	C ₃	0.3228	0.2975	0.2806	0.2637	0.2469	0.2342	0.2215	0.211	0.0211	2110	21.1
0.5	L ₁	0.0021	0.00191	0.00179	0.00169	0.00159	0.00150	0.00142	0.001352	0.1352	0.01352	0.001352
	L ₂	0.0272	0.0251	0.0236	0.0222	0.0208	0.0197	0.0187	0.01778	1.778	0.1778	0.01778
	L ₃	0.00339	0.0031	0.00295	0.00277	0.00259	0.00246	0.00233	0.00222	0.222	0.0222	0.00222
	C ₁	0.1750	0.1613	0.1521	0.1430	0.1338	0.1269	0.1201	0.1144	0.01144	114.4	11.44
	C ₂	0.0218	0.0201	0.0189	0.0178	0.0167	0.0158	0.0150	0.01427	0.001427	142.7	14.27
	C ₃	0.2876	0.2651	0.2500	0.2350	0.2199	0.2087	0.1974	0.188	0.0188	1880	18.80
0.6	L ₁	0.00225	0.00207	0.00195	0.00184	0.00172	0.00163	0.00154	0.001470	0.1470	0.01470	0.00147
	L ₂	0.0236	0.0217	0.0205	0.0193	0.0180	0.0171	0.0162	0.01542	1.542	0.1542	0.01542
	L ₃	0.00407	0.00375	0.00354	0.00332	0.00311	0.00295	0.00279	0.00266	0.266	0.0266	0.00266
	C ₁	0.1463	0.1348	0.1271	0.1195	0.1118	0.1061	0.1004	0.0956	0.00956	95.6	9.56
	C ₂	0.0252	0.0232	0.0219	0.0206	0.0193	0.0183	0.0173	0.01647	0.001647	164.7	16.47
	C ₃	0.2644	0.2436	0.2298	0.2160	0.2022	0.1918	0.1814	0.1728	0.01728	172.8	17.28
0.7	L ₁	0.00240	0.00221	0.00208	0.00196	0.00183	0.00174	0.00164	0.001565	0.1565	0.01565	0.001565
	L ₂	0.0208	0.0192	0.0181	0.0170	0.0159	0.0151	0.0143	0.01360	1.360	0.1360	0.01360
	L ₃	0.00473	0.00436	0.00411	0.00386	0.0036	0.00343	0.00324	0.00309	0.309	0.0309	0.00309
	C ₁	0.1255	0.1156	0.10910	0.1025	0.0959	0.0910	0.0861	0.0820	0.00820	82.0	8.20
	C ₂	0.0286	0.0263	0.0248	0.0233	0.0218	0.0207	0.0196	0.01867	0.001867	186.7	18.67
	C ₃	0.2485	0.2289	0.2159	0.2030	0.1900	0.1803	0.1705	0.1624	0.01624	162.4	16.24
0.8	L ₁	0.00251	0.00231	0.00218	0.00205	0.00192	0.00182	0.00172	0.001638	0.1638	0.01638	0.001638
	L ₂	0.0187	0.0172	0.0162	0.0153	0.0143	0.0136	0.0128	0.01222	1.222	0.1222	0.01222
	L ₃	0.0055	0.0050	0.00475	0.00446	0.00418	0.00396	0.00375	0.00357	0.3570	0.03570	0.00357
	C ₁	0.1089	0.1004	0.0947	0.0890	0.0833	0.0790	0.0748	0.0712	0.00712	71.2	7.12
	C ₂	0.0318	0.0293	0.0277	0.0260	0.0243	0.0231	0.0218	0.0208	0.00208	20.8	2.08
	C ₃	0.2374	0.2188	0.2064	0.1940	0.1816	0.1723	0.1630	0.1552	0.01552	155.2	15.52
0.9	L ₁	0.00257	0.00237	0.00224	0.0021	0.00197	0.00187	0.00177	0.001682	0.1682	0.01682	0.001682
	L ₂	0.0169	0.0156	0.0148	0.0139	0.0129	0.0123	0.0116	0.01110	1.11	0.111	0.0111
	L ₃	0.00616	0.0057	0.00536	0.00504	0.00471	0.00447	0.0042	0.00403	0.403	0.0403	0.00403
	C ₁	0.0964	0.0888	0.0838	0.0787	0.0737	0.0699	0.0661	0.0630	0.00630	63.0	6.30
	C ₂	0.0350	0.0323	0.0304	0.0286	0.0268	0.0254	0.0240	0.0229	0.00229	22.9	2.29
	C ₃	0.2307	0.2126	0.2006	0.1885	0.1764	0.1674	0.1583	0.1508	0.01508	150.8	15.08

C: Mmfd. in last two columns. L: Millihenries in last three columns. Mfd. and Henries in all other columns.

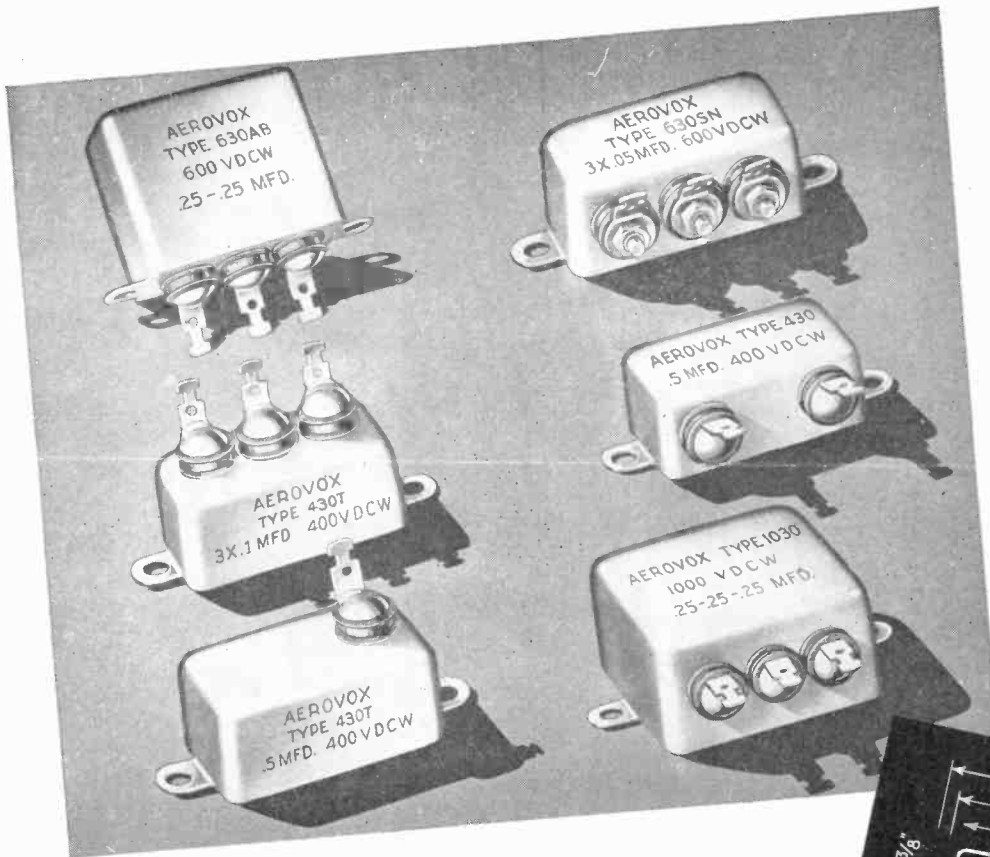


Meeting the severe operating conditions encountered in military, aircraft, police, broadcast, P-A and other equipment...

HYVOL "BATHTUB" Capacitors

● These drawn-container units are designed for applications requiring compact, extra-quality capacitors. Aerovox Type 30 capacitors are specified for equipment that must undergo severe-service operating conditions, more particularly in military, aircraft, police, broadcast, public-address, and other classes of communications equipment, as well as in electronic assemblies operating hour after hour. These "bathtubs" are standard capacitors in Government radio and electronic equipment.

Type 30 is Hyvol impregnated and filled. Type 30M is mineral-oil impregnated and filled. One-piece drawn

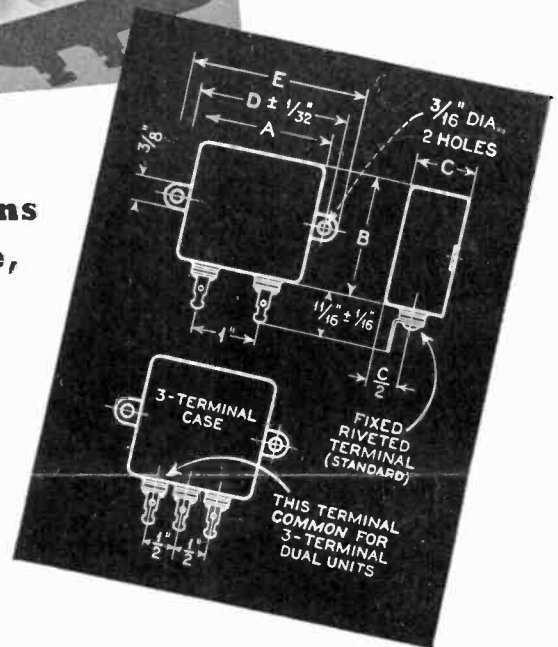

metal case with soldered bottom plate. Terminals are constructed with the Aerovox-originated "double-rubber" bakelite insulators permanently riveted to the case, making a sturdy, absolutely immersion-proof assembly. Terminals on side, top, bottom or ends to suit mounting and wiring requirements.

In 400, 600 and 1000 v. D.C.W. Choice of capacitances. Single, dual and triple sections.

● Write for descriptive literature and listings.