

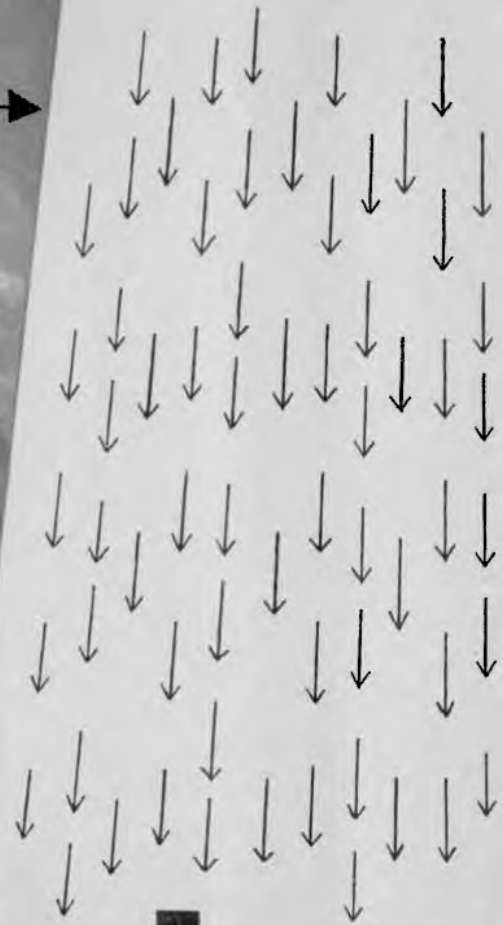
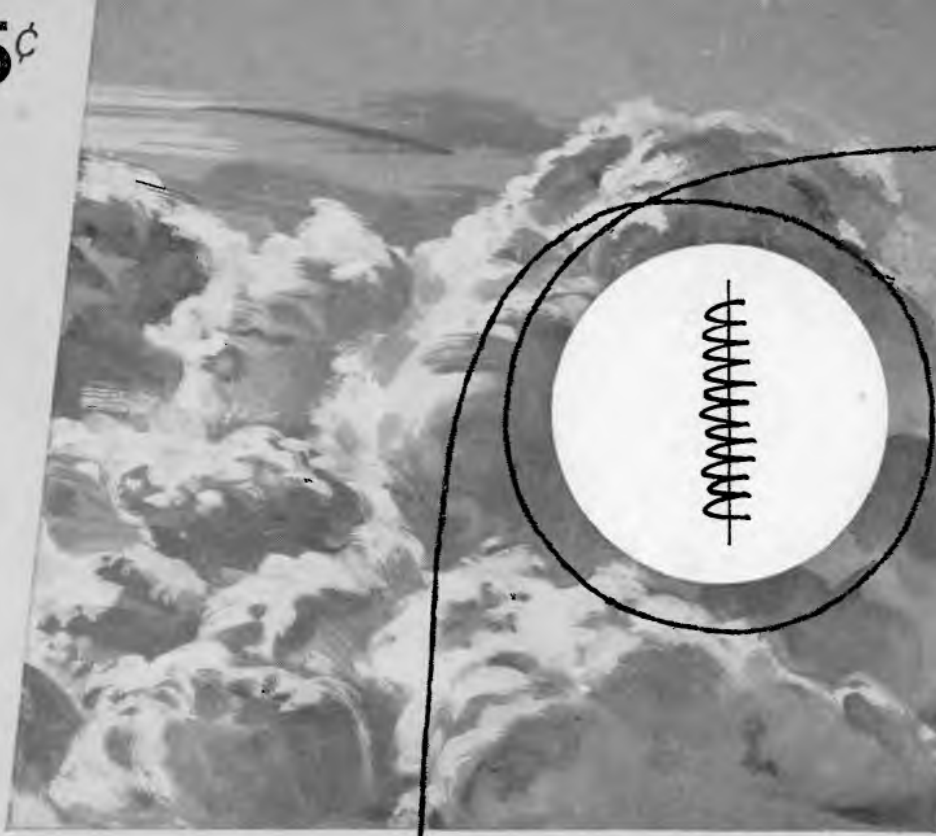


25¢

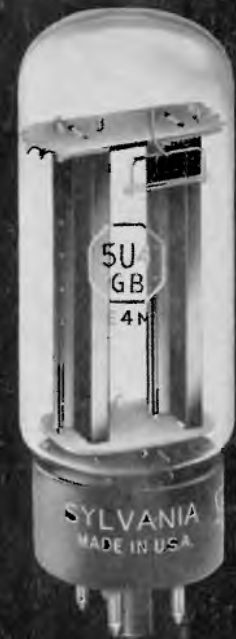

characteristics of SYLVANIA

receiving tubes

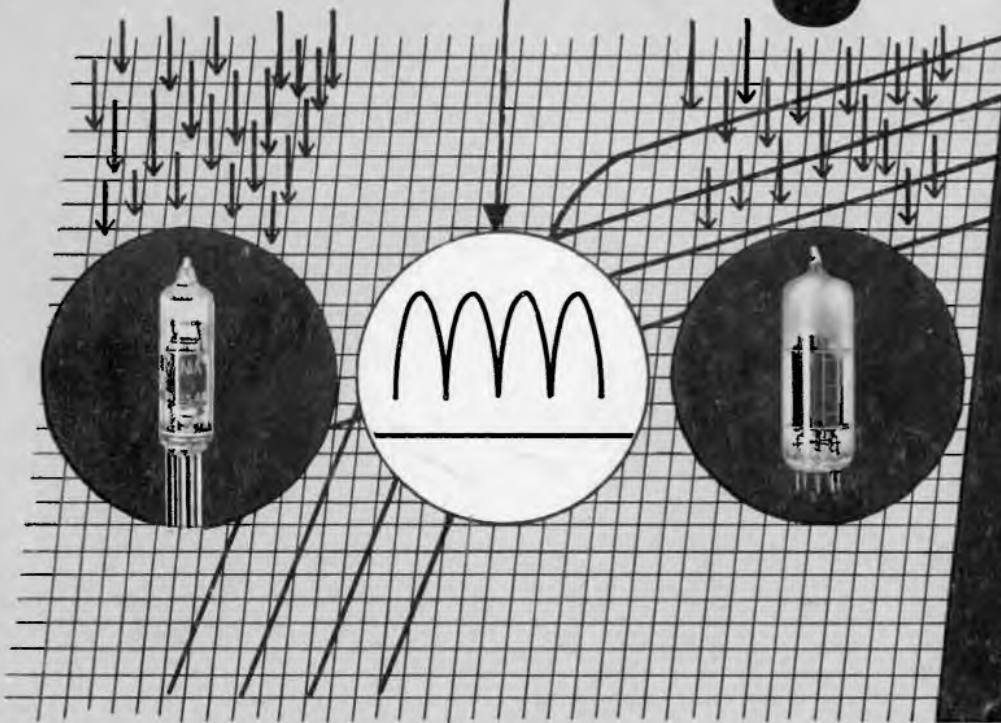

SYLVANIA ELECTRIC PRODUCTS INC.



REVISION NO. 2 1958

A TECHNICAL PUBLICATION OF

SYLVANIA

SYLVANIA ELECTRIC PRODUCTS INC.

1740 BROADWAY, NEW YORK 19, N. Y.

SYLVANIA RADIO AND TELEVISION TUBE CHARACTERISTICS CHART

HOW TO USE THIS CHART

The types are listed in numerical and alphabetical order. The second column now lists the Bulb size or style of construction, whichever is most helpful in describing the type. Lock-in is, of course, well known, but the letters "T" and "ST" may need explaining. "T" means tubular bulb and "ST" is the dome topped bulb as now used in Type 6D6, 24, etc. The following number gives the nominal maximum diameter in eighths of inches. Subminiature types are marked T3, T2 or T1 depending on the bulb diameter.

Columns are included to show the type of emitter, (cathode or filament), and for interelectrode capacitances on those types having capacitance ratings. On converters the capacitances shown are respectively, Signal Grid to Plate; R-F Input; and Mixer Output. The capacitance values shown are for a shielded tube when the data are available, since this is the latest standard method. Except in the case of obsolete (or newly announced) types, more complete technical data may be found in the SYLVANIA Technical Manual.

The "Basing Diagram" column indicates the internal and external shield connections. For example, this column now shows the basing for Type 7A7 to be 8V-L-5. This means that the active elements are connected as shown in the base diagram 8V, and that the external shielding (in this case the Lock-in base) is connected to the lug (L) and the internal shield to pin 5. This avoids having a separate base diagram for types with a minor difference in shielding. The figures 0-0 indicate no external and no internal shielding respectively.

When replacing tubes in series string television receivers, attention should be given to the complete type number including the suffix. Prototypes should not be substituted for series string types.

Heater voltage, heater current and heater-cathode voltage ratings of the new series string tubes may, due to the requirements of such operation, differ widely from those of their prototypes. All the new series string types have controlled heater warm-up time for series string operation. In addition, heater current production tolerances have been tightened on all series string tubes to insure proper steady state voltage distribution. Two examples are shown in the following table.

	Series String Type 5AQ5	Proto- Type 6AQ5	Series String Type 6SN7GTB	Proto- Type 6SN7GTA
Series String Controlled Heater	YES	NO	YES	NO
Warm-up Time.....	4.7	6.3	6.3	6.3
Heater Voltage.....	600	450	600	600
Heater Current (ma).....	±25	±40	±25	±50
Tolerance (ma).....	200	200	200	200
Heater-Cathode Voltage.....				

It should be noted that the 5AQ5 and 6AQ5 differ in all characteristics shown except for heater cathode voltage. The 6SN7GTB and 6SN7GTA are identical except for heater current tolerance and controlled series string heater warm-up time. However, substitution of a 6SN7GTA in a series string receiver may, due to the absence of the controlled series string heater warm-up characteristic and wider heater current production tolerance, cause premature failure.

Series string types differ from their prototypes only in those characteristics necessary to insure dependable operation in series string television receivers. All other characteristics and ratings are identical to those of the prototypes.

NOTICE

This chart contains the very latest radio and television tubes in addition to many out-of-date types. It is designed to be of maximum use to servicemen as a quick reference chart.

Please note that all types listed are not available from Sylvania. They are included for your reference in finding substitutes, etc. Consult our price list for types currently available.

The data published here have been compiled from various sources and while believed to be accurate, no responsibility can be assumed in case of error.

Mention or reference to patented circuits does not constitute permission for their use. The license agreement under which Sylvania tubes are sold is enclosed in the tube carton.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
OOA	ST-14	Triode	4D-0-0	Filament	5.0	0.250	8.5	3.2	2.0	Detector	45	0	1.5	30,000	666	20	OOA	
OA2	T-5½	Diode	5B0-0-0	Cold K	Voltage Regulator with starting Voltage at 155, Operating Voltage 150, Operating Current 5 to 30 Ma.										OA2		
OA3/VR75	ST-12	Diode	4AJ-0-0	Cold K	Voltage Regulator with starting Voltage at 100, Operating Voltage 75, Operating Current 5 to 40 Ma.										OA3/VR75		
OA4G	ST-12	Gas Triode	4V-0-0	Cold K	Relay Tube Peak Cathode Ma. = 100 D-C Cathode Ma. = 25 Max. Starter Anode Drop = 60V. Approx. Anode Drop = 70V. Approx.										OA4G		
OA5	T-5½	Gas Pentode	OA5	Cold K	Switching	750	Trigger Grid Voltage = +90 Volts. Trigger Pulse Voltage = 85 Volts. Keep Alive Current = 50 μa . Trigger Grid Circuit Resistance = 0.25 Meg.										OA5
OB2	T-5½	Diode	5B0-0-0	Cold K	Voltage Regulator with starting Voltage at 115, Operating Voltage 105, Operating Current 5 to 30 Ma.										OB2		
OB3	ST-12	Diode	4AJ-0-0	Cold K	Voltage Regulator with starting Voltage at 125, Operating Volts 90, Operating Current 5 Ma. Min. 30 Ma. Max.										OB3		
OC2	T-5½	Diode	5B0	Cold K	Voltage Regulator With Starting Voltage at 105, Operating Voltage 75, Operating Current 5 Ma. Min., 30 Ma. Max.										OC2		
OC3	ST-12	Diode	4AJ-0-0	Cold K	Voltage Regulator with starting Voltage at 135, Operating Volts 105, Operating Current 5 Ma. Min. 40 Ma. Max.										OC3		
OD3	ST-12	Diode	4AJ-0-0	Cold K	Voltage Regulator with starting Voltage at 180, Operating Volts 150, Operating Current 5 Ma. Min. 40 Ma. Max.										OD3		
OY4 OY4G	Metal T-7	Gas Diode	4BU-1-0 4BU-0-0	Cathode	Ionic	H-W Rect.	117 A.C. Volts Per Plate, RMS, 75 Ma. Max., 40 Ma. Min. Output Current. Starter Anode Connects to Anode thru 10 Megohms By-Passed with .002 μf .										OY4 OY4G	
OZ4	Metal	Gas Duodi.	4R-1-0	Cathode	Ionic	F-W Rect.	300 A.C. Volts Per Plate, RMS, 90 Ma. Max. 30 Ma. Min. Output Current.										OZ4	
OZ4A	Metal	Gas Duodi.	4R-1-0	Cathode	Ionic	F-W Rect.	300 A.C. Volts Per Plate, RMS, 110 Ma. Max., 30 Ma. Min. Output Current										OZ4A	
OZ4G	T-7	Gas Duodi.	4R-0-0	Cathode	Ionic	F-W Rect.	300 A.C. Volts Per Plate, RMS, 90 Ma. Max. 30 Ma. Min. Output Current.										OZ4G	
O1A	ST-14	Triode	4D-0-0	Filament	5.0	0.250	8.1	3.1	2.2	Amplifier	90 135	4.5 9.0	2.5 3.0	11,000 10,000	725 800	8.0 8.0	O1A	
1A3	T-5½	Diode	5AP-0-5	Cathode	1.4	0.150	Detector	Half Wave Cathode Type Rectifier for H. F. Use										1A3	
1A4P	ST-12	Pentode	4M-0-4	Filament	2.0	0.060	.007m	5.0	11.0	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.3	0.9 0.8	1 Meg. 1 Meg.	625 725	1A4P	
1A4T	ST-12	Tetrode	4K-0-3	Filament	2.0	0.060	.01m	5.0	11.0	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.2	0.7 0.7	350,000 600,000	625 650	1A4T	
1A5GT	T-9	Power Pent.	6X-0-0	Filament	1.4	0.050	Power Amp.	85 90	4.5 4.5	85 90	3.5 4.0	0.7 0.8	300,000 300,000	800 850	25,000 25,000	100 115	1A5GT	
1A6	ST-12	Heptode	6L-0-0	Filament	2.0	0.060	0.25	10.5	9.0	Converter	135 180	3.0 3.0	67.5 67.5	1.8 1.5	2.1 2.0	400,000 500,000	275▲ 300▲	(Ga = 135V. □ Max. 2.0 Ma.) (Ga = 180V. □ Max. 2.5 Ma.)		1A6	
1A7GT	T-9	Heptode	7Z-1-0	Filament	1.4	0.050	0.5m	7.0	10.0	Converter	90	0.0	90	0.6	1.2	600,000	250▲	(Ga = 90V. Max. 1.2 Ma.)		1A7GT	
1AB5	Lock-in	Pentode	5BF-L-0	Filament	1.2	0.130	0.25m	2.8	4.2	R-F Amp.	90 150	0 1.5	90 150	3.5 6.8	0.8 2.0	275,000 120,000	1,100 1,350	1AB5	
1AC5	T-3	Pentode	8CP-0-0	Filament	1.25	0.040	Power Amp.	30 45 67.5	2.0 3.0 4.5	30 45 67.5	0.5 1.0 2.0	0.1 0.2 0.4	200,000 170,000 150,000	450 600 750	50,000 40,000 25,000	5 15 50	1AC5	
1AD5	T-3	Pentode	8CP-0-0	Filament	1.25	0.040	.009	1.9	3.0	R-F Amp.	30 45 67.5	0 0 0	30 45 67.5	0.45 0.9 1.85	0.16 0.35 0.75	700,000 700,000 700,000	430 580 735	1AD5	
1AE4	T-5½	Pentode	6AR-0-0	Filament	1.25	0.100	.008m	3.6	4.4	R-F Amp.	90	0	90	3.5	1.2	500,000	1,550	1AE4	
1AF4	T-5½	Pentode	6AR-0-1&5	Filament	1.4	0.025	.008m	3.8	7.6	R-F Amp.	67.5 90	0 0	67.5 90	1.2 1.8	0.32 0.55	2.2 Meg. 1.8 Meg.	925 1,050	1AF4	
1AF5	T-5½	Diode Pent.	6AU-0-0	Filament	1.4	0.025	0.2	2.5	4.3	Det. Amp.	67.5 90	0 0	67.5 90	0.7 1.1	0.25 0.4	2.8 Meg. 2.0 Meg.	550 600	1AF5	
1AG4	T-2X3	Pentode	1AG4-0-0	Filament	1.25	0.040	Power Amp.	41.4	3.6	41.4	2.4	0.6	180,000	1,000	12,000	35	1AG4	
1AG5	T-2X3	Diode Pent.	1AG5	Filament	1.25	0.030	0.1	1.7	2.4	Amplifier	45	2.0	45	0.28	0.12	2.5 Meg.	250	1AG5	
1AJ5	T-2X3	Diode Pent.	1AJ5-4-0	Filament	1.25	0.040	0.1	1.7	2.4	Det. Amp.	45	0	45	1.0	0.3	300,000	425	1AJ5	
1AK4	T-2X3	Pentode	1AK4-3-0	Filament	1.25	0.020	.01m	3.5	4.5	Class A1 Amp.	45 67.5	0 0	45	0.75 0.75	0.2 0.2	1,500,000 2,000,000	750 750	(Screen Supply = 67.5 Volts Thru .11 Meg. Res.)		1AK4	
1AK5	T-2X3	Diode Pent.	1AK5-4-0	Filament	1.25	0.020	0.1m	2.0	2.7	Det. Amp.	45	0	45	0.5	0.2	400,000	280	1AK5	
1AX2	T-6½	Diode	9Y	Filament	1.4	0.650	Flyback H-W Rect.	Maximum Peak Inverse Plate Voltage = 25,000 Volts. Maximum Peak Plate Current = 45 Ma. Maximum Average Current = 0.5 Ma.										1AX2	
1B3GT	T-9	Diode	3C	Filament	1.25	0.200	1.3*	Flyback H-W Rect.	Maximum Peak Inverse Plate Voltage = 26,000 Volts. Maximum Peak Plate Current = 50 Ma. Maximum Average Plate Current = 0.5 Ma.										1B3GT	
1B4P	ST-12	Pentode	4M-0-4	Filament	2.0	0.060	.007m	5.0*	11.0*	R-F Amp.	135 180	3.0 3.0	67.5 67.5	1.6 1.7	0.7 0.6	1.5 Meg. ♦ 1.5 Meg. ♦	560 650	1B4P	
1B5	ST-12	Duodiode Tri.	6M-0-5	Filament	2.0	0.060	3.6	1.6	1.9	Det. Amp.	135	3.0	0.8	35,000	575	20	1B5	
1B7GT	T-9	Heptode	7Z-1-0	Filament	1.4	0.100	0.34	7.0	7.5	Converter	90	0.0	45	1.5	1.3	350,000	350▲	(Ga = 90V., 1.6 Ma.)		1B7GT	
1B8GT	T-9	Diode Triode Pentode	8AJ-0-7	Filament	1.4	0.100	Det. Amp. Power Amp.	90 90	0 6.0 90	0.15 6.3 1.4	240,000	275 1,150	14,000	210	1B8GT	
1C3	T-5½	Triode	5CF-0-0	Filament	1.4	0.050	1.8	0.9	4.2	Amplifier	90 90	0 3.0	4.5 1.4	11,200 ♦ 19,000 ♦	1,300 760	14.5 14.5	1C3
1C5GT	T-9	Power Pent.	6X-0-0	Filament	1.4	0.100	Power Amp.	83 90	7.0 7.5	83 90	7.0 7.5	1.6 1.6	110,000 115,000	1,500 1,550	165 180	9,000 8,000	900 240	1C5GT	
1C6	ST-12	Heptode	6L-0-0	Filament	2.0	0.120	0.3	10.0	10.0	Converter	135 180	3.0 3.0	67.5 67.5	1.3 1.5	2.5 2.0	600,000 700,000	300▲ 325▲	(Ga = 135V. □ Max. 3.1 Ma.) (Ga = 180V. □ Max. 4.0 Ma.)		1C6	
1C7G	ST-12	Heptode	7Z-0-0	Filament	2.0	0.120	0.26	10.0	14.0	Converter	135 180	3.0 3.0	67.5 67.5	1.3 1.5	2.5 2.0	600,000 700,000	300▲ 325▲	(Ga = 135V. □ Max. 3.1 Ma.) (Ga = 180V. □ Max. 4.0 Ma.)		1C7G	
1C8	T-3	Heptode	8CN-0-0	Filament	1.25	0.040	0.25m	6.5	4.0	Converter	30	0.0	30	0.32	0.75	300,000	100▲	1C8	
1D3	T-3	Triode	8DN-0-0	Filament	1.25	0.300	2.6*	1.0*	1.0*	Amplifier	90	5.0	12.5	3,400	8.7	1D3	

1D5GP	ST-12	Pentode	5Y-0-7	Filament	2.0	0.060	.007m	5.0*	12.0*	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.3	0.9 0.8	1 Meg. 1 Meg.	625 725	1D5GP
1D5GT	ST-12	Tetrode	5R-0-4	Filament	2.0	0.060	.01m	4.4	10.8	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.2	0.7 0.7	350,000 600,000	625 650	1D5GT
1D7G	ST-12	Heptode	7Z-0-0	Filament	2.0	0.060	0.25	10.5	9.0	Converter	135 180	3.0 3.0	67.5 67.5	1.8 1.5	2.1 2.0	400,000 500,000	275▲ 300▲	(Ga = 135V, □ Max. 2.0 Ma.) (Ga = 180V, □ Max. 2.5 Ma.)			1D7G
1D8GT	T-9	Diode Triode Pentode	8AJ-0-2	Filament	1.4	0.100	Det. Amp. Power Amp.	45 67.5 90 45 67.5 90	0 0 0 4.5 6.0 9.0 45 67.5 90	0.3 0.6 1.1 1.6 3.8 5.0 0.3 0.8 1.0	77,000 55,500 43,500 300,000 200,000 200,000	395 450 575 650 875 925	95 95 95 20,000 16,000 12,000 35 100 200	1D8GT


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
 (2) Converter tube capacitances given are signal grid to plate, RF input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor.
 I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
 Plate and Target Supply Voltage.
 † Maximum Signal.

□ Applied through 20,000 ohms.
 ▲ Conversion Transconductance.
 ** Triode Operation.

□ Plate to Plate.
 † Approximate.

m maximum.
 ■ Cathode Resistor (ohms).

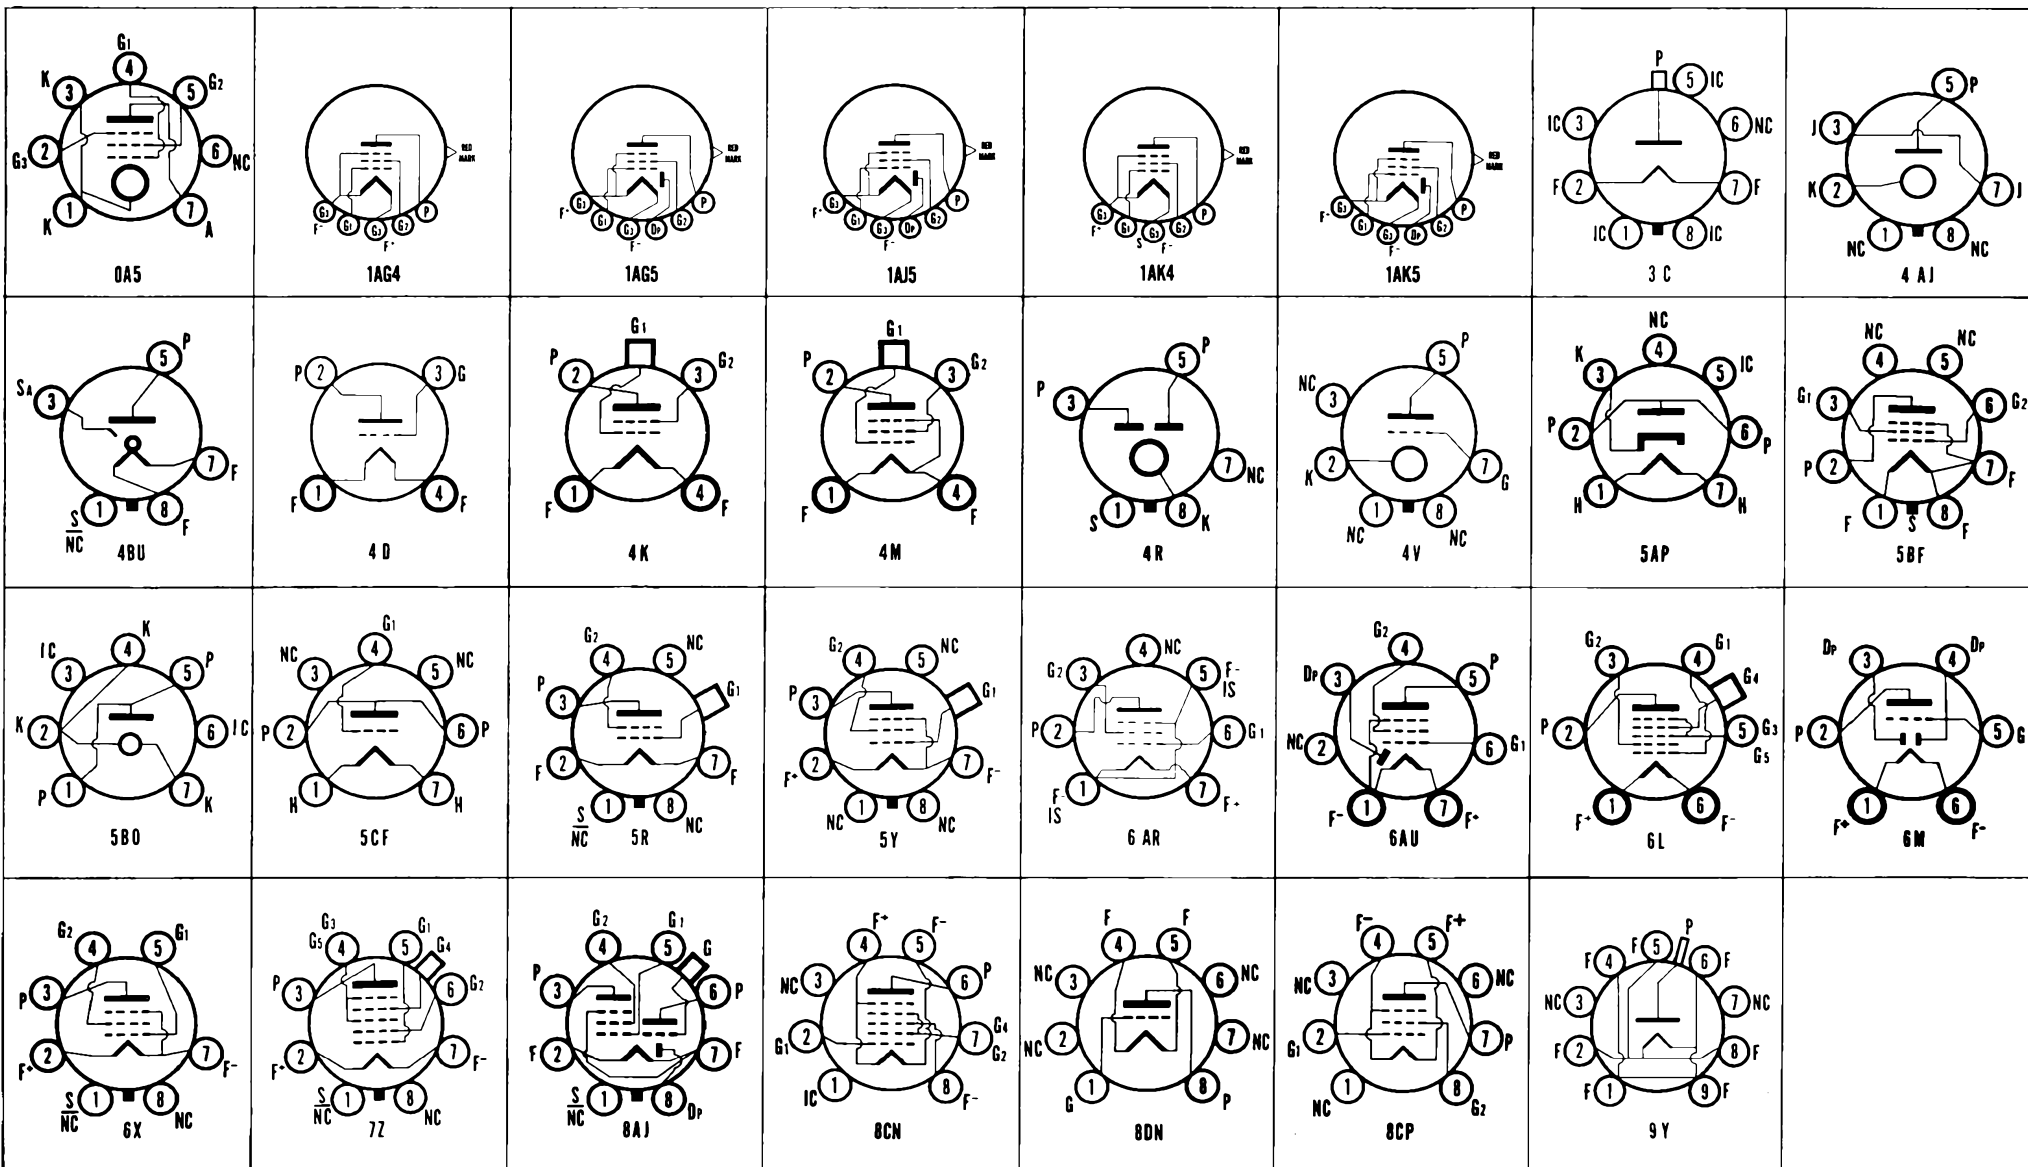


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milliwatts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
1DN5	T-5½	Diode Pent.	6BW	Filament	1.4	0.050	Det. Amp.	67.5	0	67.5	2.1	0.55	.6 Meg. †	630	1DN5	
1E4G	T-9	Triode	5S-0-0	Filament	1.4	0.050	2.4	2.4	6.0	Amplifier	90 90	0.0 3.0	4.5 1.5	11,000 17,000	1,325 825	14.5 14	1E4G	
1E5GP	ST-12	Pentode	5Y-0-7	Filament	2.0	0.060	.007m	5.5	12.0	R-F Amp.	135 180	3.0 3.0	67.5 67.5	1.6 1.7	0.7 0.6	1.5 Meg. † 1.5 Meg. †	560 650	1E5GP	
1E7GT	T-9	Duo. Power Pent.	8C-0-0	Filament	2.0	0.240	P.P.A1 Amp.	135	7.5	135	7.0	2.0	220,000	1,600	350	24,000 †	575	1E7GT	
1E8	T-3	Heptode	8CN-0-0	Filament	1.25	0.040	0.4	6.0	5.0	Converter	30 45 67.5	0 0 0	30 45 67.5	0.30 0.60 1.0	0.8 1.1 1.5	300,000 400,000 400,000	115▲ 140▲ 150▲	1E8	
1F4	ST-12	Power Pent.	5K-0-0	Filament	2.0	0.120	Power Amp.	135	4.5	135	8.0	2.4	200,000	1,700	16,000	310	1F4	
1F5G	ST-12	Power Pent.	6X-0-0	Filament	2.0	0.120	Power Amp.	135	4.5	135	8.0	2.4	200,000	1,700	16,000	310	1F5G	
1F6	ST-12	Duodiode Pentode	6W-0-6	Filament	2.0	0.060	.007m	4.0	9.0	R-F or I-F A-F Amp.	180 EB = 135 V. thru 0.25 Meg. Res., EC2 = 135 V. thru 0.8 Meg. Res., EC1 = 2.0 V., RG1 = 1 Meg.	1.5	67.5	2.2	0.7	1 Meg.	650	1F6
1F7G	ST-12	Duodiode Pentode	7AD-0-7	Filament	2.0	0.060	.01m	3.8*	9.5*	R-F or I-F A-F Amp.	180 EB = 135 V. thru 0.25 Meg. Res., EC2 = 135 thru 0.8 Meg. Res., EC1 = 2.0 V., RG1 = 1 Meg.	1.5	67.5	2.2	0.7	1 Meg.	650	1F7G
1F7GV	ST-12	Duodi. Pent.	7AF-0-7	Filament	2.0	0.600	Same as 1F7G Except Diodes One Above the Other on Negative Filament.										1F7GV		
1G3	T-9	Diode	3C	Filament	1.25	0.200	Flyback H-W Rect.	Maximum Peak Inverse Plate Voltage = 26,000 Volts. Maximum Peak Plate Current = 50 Ma. Maximum Average Plate Current = 0.5 Ma.										1G3	
1G4GT	T-9	Triode	5S-0-0	Filament	1.4	0.050	Amplifier	90	6.0	2.3	10,700	825	8.8	1G4GT	
1G5G	ST-14	Pentode	6X-0-0	Filament	2.0	0.120	Power Amp.	90	6.0	90	8.5	2.5	133,000 †	1,500	8,500	250	1G5G	
1G6GT	T-9	Duotriode	7AB-0-0	Filament	1.4	0.100	S.T.A1 Amp. P.P. Class B	90 90	0.0 0.0	1.0# 2-14†	40,000	825	33	(Each Triode Class A) 12,000 †	675	1G6GT	
1H2	T-6½	Diode	9DT	Cathode	1.4	0.550	Flyback H-W Rect.	Maximum Peak Inverse Plate Voltage = 24,000 Volts. Maximum Peak Plate Current = 50 Ma. Maximum Average Plate Current = 0.5 Ma.										1H2	
1H4GT	T-9	Triode	5S-0-0	Filament	2.0	0.060	Det. Amp.	90 135 180	4.5 9.0 13.5	2.5 3.0 3.1	11,000 10,300 10,300	850 900 900	9.3 9.3 9.3	1H4GT	
1H5GT	T-9	Diode Triode	5Z-1-7	Filament	1.4	0.050	1.1	0.35	4.0	Det. Amp.	90	0.0	0.15	240,000	275	65	1H5GT	
1H6GT	T-9	Duodiode Tri.	7AA-0-6	Filament	2.0	0.060	3.6	1.6	1.9	Det. Amp.	135	3.0	0.8	35,000	575	20	1H6GT	
1J3	T-9	Diode	3C	Filament	1.25	0.200	1.6*	Flyback H-W Rect.	Maximum Peak Inverse Volts = 26,000 Volts. Maximum Peak Plate Current = 50 Ma. Maximum Average Plate Current = 0.5 Ma.										1J3	
1J5G	ST-14	Pentode	6X-0-0	Filament	2.0	0.120	Power Amp.	135	16.5	135	7.0	2.0	125,000	1,000	125	13,500	575	1J5G	
1J6G 1J6GT	ST-12 T-9	Duotriode	7AB-0-0	Filament	2.0	0.240	Power Amp.	Characteristics Same as Type 19.										1J6G 1J6GT	
1K3	T-9	Diode	3C	Filament	1.25	0.200	Flyback H-W Rect.	Maximum Peak Inverse Volts = 26,000 Volts. Maximum Peak Plate Current = 50 Ma. Maximum Average Plate Current = 0.5 Ma.										1K3	
1L4	T-5½	Pentode	6AR-0-1&5	Filament	1.4	0.050	.008m	3.8	7.5	R-F Amp.	90 90	0 0	67.5 90	2.9 4.5	1.2 2.0	600,000 350,000	925 1,025	1L4	
1L6	T-5½	Heptode	7DC-0-0	Filament	1.4	0.050	0.36m	7.5	12.0	Converter	90	0	45	0.5	0.6	650,000 †	300▲	(Ga = 90 V., 1.2 Ma.)			1L6	
1LA4	Lock-in	Power Pent.	5AD-L-0	Filament	1.4	0.050	Power Amp.	85 90	4.5 4.5	85 90	3.5 4.0	0.7 0.8	300,000 300,000	800 850	25,000	100 115	1LA4	
1LA6	Lock-in	Heptode	7AK-L-0	Filament	1.4	0.050	0.4	7.5	8.0	Converter	90	0.0	45	0.55	0.6	750,000	250▲	(Ga = 90 V. Max., 1.2 Ma.)			1LA6	
1LB4	Lock-in	Power Pent.	5AD-L-0	Filament	1.4	0.050	Power Amp.	45 67.5 90	4.5 6.0 9.0	45 67.5 90	1.6 3.8 5.0	0.3 0.8 1.0	400,000 300,000 250,000	650 875 925	20,000 16,000 12,000	35 100 200	1LB4	
1LB6	Lock-in	Heptode	8AX-L-0	Filament	1.4	0.050	0.1	3.8	8.0	Converter	90	0.0	67.5	0.40	2.2	2 Meg. †	100▲	1LB6	
1LC5	Lock-in	Pentode	7AO-L-8	Filament	1.4	0.050	.007m	3.2	7.0	R-F Amp.	45 90	0.0 0.0	45 45	1.1 1.15	0.35 0.30	700,000 1.5 Meg.	750 775	1LC5	
1LC6	Lock-in	Heptode	7AK-L-0	Filament	1.4	0.050	0.28	9.0	5.5	Converter	45 90	0.0 0.0	35 35	0.7 0.75	0.75 0.7	300,000 650,000	275▲ 275▲	(Ga = 45 V. Max., 1.4 Ma.) (Ga = 45 V. Max., 1.4 Ma.)			1LC6	
1LD5	Lock-in	Diode Pent.	6AX-L-8	Filament	1.4	0.050	0.18	3.2	6.0	Amplifier	45 90	0.0 0.0	45 45	0.55 0.6	0.12 0.1	750,000 750,000	550 575	1LD5	
1LE3	Lock-in	Triode	4AA-L-0	Filament	1.4	0.050	1.7	1.7	3.0	Amplifier	90 90	0.0 3.0	4.5 1.4	11,200 19,000	1,300 760	14.5 14.5	1LE3
1LG5	Lock-in	Pentode	7AO-L-8	Filament	1.4	0.050	.007m	3.2	7.0	R-F Amp.	45 90 90	0 0 1.5	45 45 90	1.5 1.7 3.7	0.45 0.4 0.9	350,000 † 1,000,000 † 500,000 †	800 800 1,050	1LG5	
1LH4	Lock-in	Diode Triode	5AG-L-1	Filament	1.4	0.050	Det. Amp.	90	0.0	0.15	240,000	275	65	1LH4	
1LN5	Lock-in	Pentode	7AO-L-8	Filament	1.4	0.050	.007m	3.4	8.0	R-F Amp.	90	0.0	90	1.6	0.35	1.1 Meg.	800	1LN5	
1NSGT	T-9	Pentode	5Y-1-7	Filament	1.4	0.050	.007m	2.8	10.0	R-F Amp.	90	0.0	90	1.2	0.3	1.5 Meg. †	750	1NSGT	
1N6GT	T-9	Diode Pent.	7AM-0-0	Filament	1.4	0.050	Det. Amp.	90	4.5	90	3.4	0.7	300,000 †	800	25,000	100	1N6GT	
1P5GT	T-9	Pentode	5Y-1-7	Filament	1.4	0.050	.007m	3.0	10.0	R-F Amp.	90	0.0	90	2.3	0.7	800,000	750	1P5GT	
1Q5GT	T-9	Beam Pent.	6AF-0-0	Filament	1.4	0.100	Power Amp.	90	4.5	90	9.5	1.3	2,200	8,000	270	1Q5GT	
1Q6	T-3	Diode Pent.	8CO-0-0	Filament	1.25	0.040	.085	1.8	4.2	Det. Amp.	30 67.5	0.0 0.0	30 67.5	0.33 1.60	0.09 0.40	500,000 400,000	330 600	1Q6	

1R4	Lock-in	H. F. Diode	4AH-L-2	Cathode	1.4	0.150					Detector										1R4	
1R5	T-5½	Heptode	7AT-0-0	Filament	1.4	0.050	0.4m	7.0	12.0	Converter	45	0.0	45	0.7	2.1	500,000 †	210 ▲				1R5	
1S4	T-5½	Power Pent.	7AV-0-0	Filament	1.4	0.100					Power Amp.	45	4.5	45	3.8#	0.8#	100,000 †	1,250				1S4
1S5	T-5½	Diode Pent.	6AU-0-0	Filament	1.4	0.050	0.2	2.0	4.0	Det. Amp.	67.5	0.0	67.5	1.6	0.4	600,000	625				1S5	
1S6	T-3	Diode Pent.	8DA-0-0	Filament	1.25	0.040					Det. Amp.	30	0	30	0.33	0.1	500,000	330				1S6
											45	0	45	0.75	0.21	500,000	475					
											67.5	0	67.5	1.6	0.4	400,000	600					

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. † Per Tube or Section. □ Applied through 20,000 ohms. †† Plate to Plate. ††† Cathode Resistor (ohms).
 (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor. ‡ Plate and Target Supply Voltage. ▲ Conversion Transconductance. †††† Triode Operation.
 † Maximum Signal. ††††† Cathode Resistor (ohms).

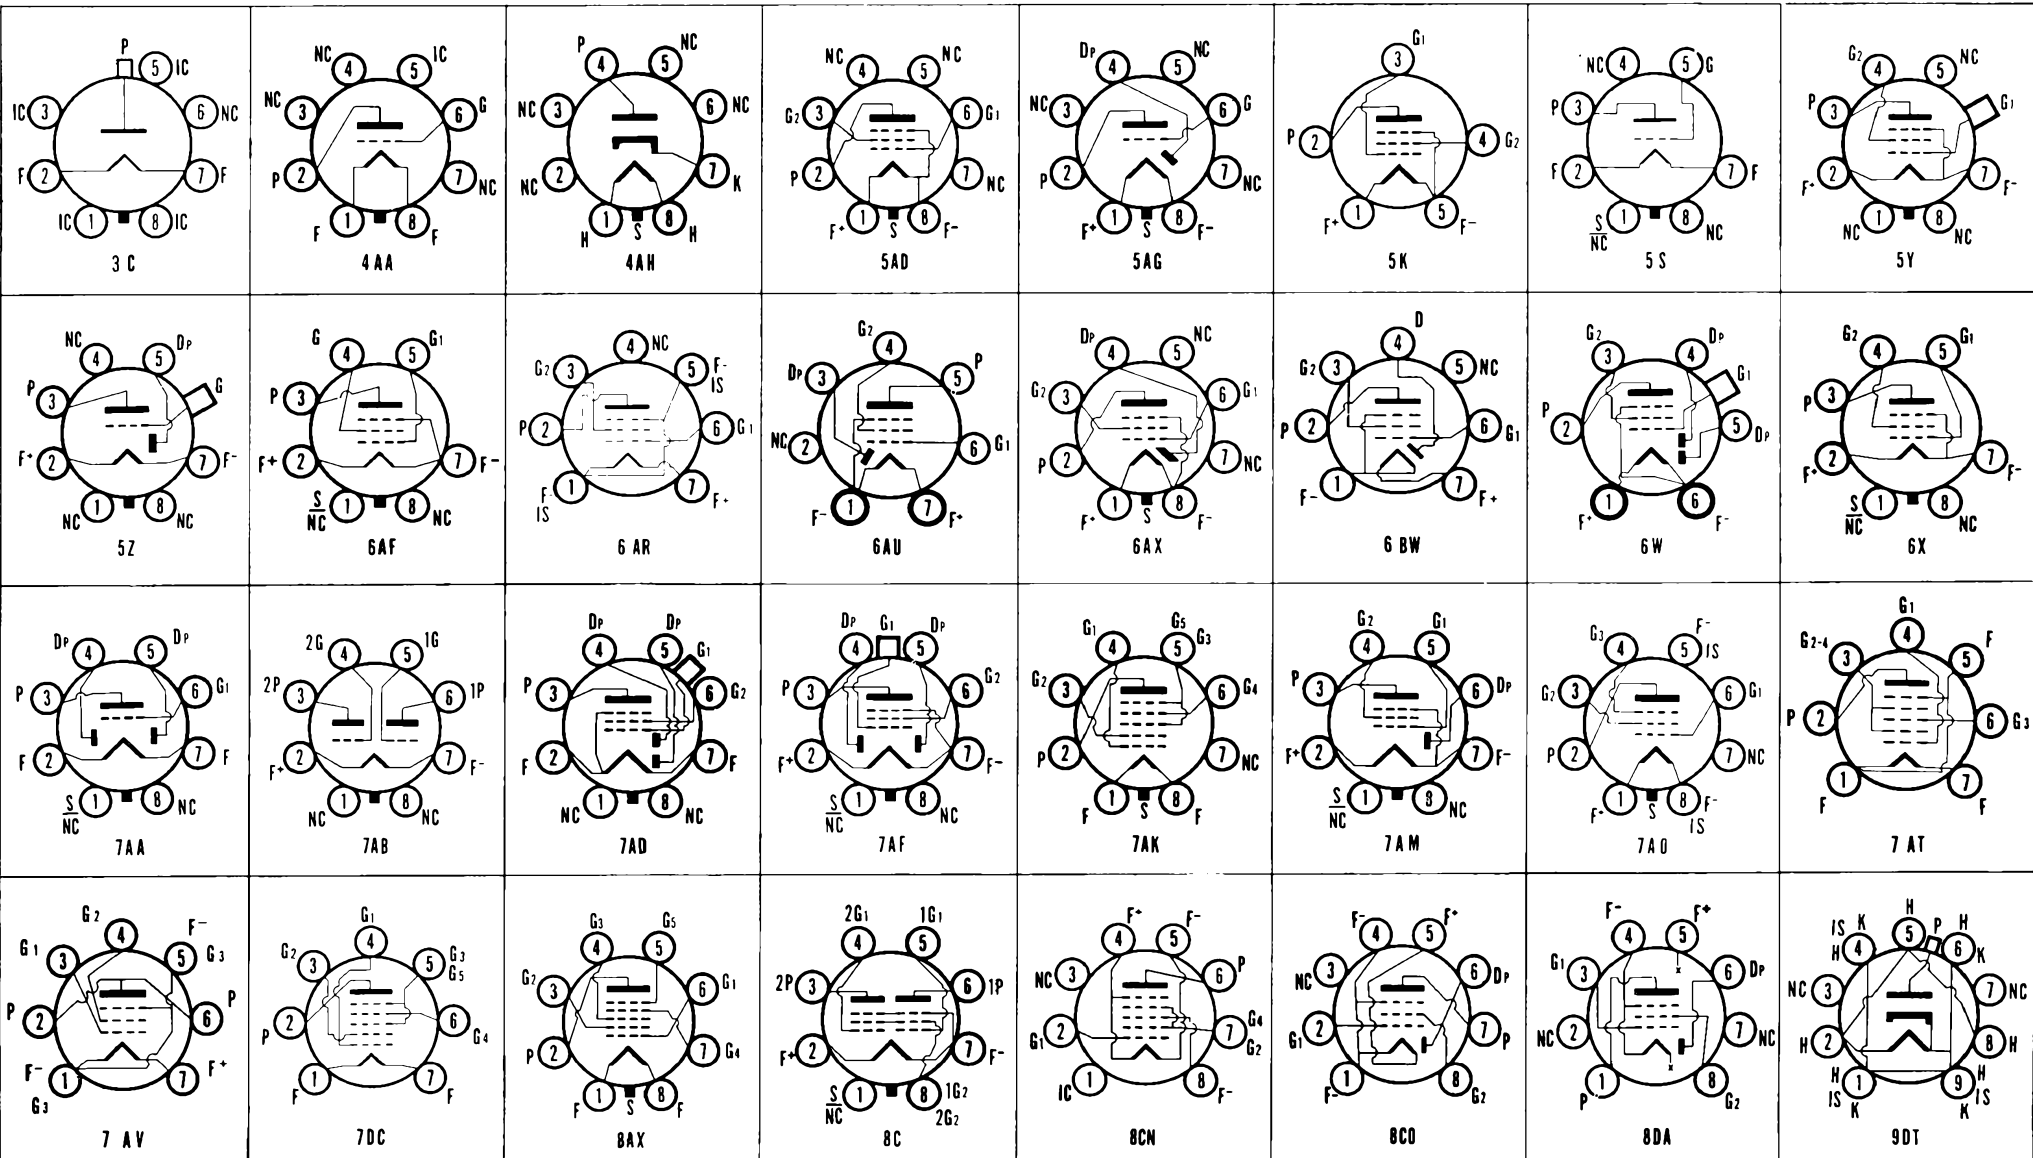


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
1SA6GT	T-9	Pentode	6BD-0-0	Filament	1.4	0.050	.01m	5.2	8.6	R-F Amp.	45 67.5 90	0 0 0	45 67.5 67.5	1.1 2.4 2.45	0.3 0.7 0.68	700,000 600,000 800,000	750 950 970	1SA6GT	
1SB6GT	T-9	Diode Pent.	6BE-0-0	Filament	1.4	0.050	0.25	3.2	3.0	Det. Amp.	90 45	0 0	67.5 45	1.45 0.6	0.38 0.16	700,000 900,000	665 500	1SB6GT	
1T4	T-5½	Pentode	6AR-0-1&5	Filament	1.4	0.050	.008m	3.8	7.5	R-F Amp.	45 90	0.0 0.0	45 67.5	1.7 3.5	0.7 1.4	350,000 500,000	700 900	1T4	
1T5GT	T-9	Power Pent.	6X-0-0	Filament	1.4	0.050	0.5	4.8	8.0	Power Amp.	90	6.0	90	6.5	1.4	1,150	14,000	170	1T5GT	
1T6	T-3	Diode Pent.	8DA-0-0	Filament	1.25	0.040	Det. Amp.	30 45 67.5	0 0 0	30 45 67.5	0.33 0.75 1.6	0.1 0.21 0.4	500,000 500,000 400,000	330 475 600	1T6	
1U4	T-5½	Pentode	6AR-0-1&5	Filament	1.4	0.050	.008m	3.6	7.5	R-F Amp.	90	0	90	1.6	0.45	1.6 Meg. ϕ	900	1U4	
1U5	T-5½	Diode Pent.	6BW-0-0	Filament	1.4	0.050	0.2	2.2	2.4	Det. Amp.	Characteristics Same as Type 155.										1U5	
1U6	T-5½	Heptode	7DC-0-0	Filament	1.4	0.025	0.4	8.0	12.0	Converter	67.5 90	0 0	45 45	0.5 0.6	0.7 0.6	500,000 500,000	260▲ 275▲	(Ga = 67.5 V., 1.0 Ma.) (Ga = 90 V., 1.1 Ma.)			1U6	
1V	T-9	Diode	4G-0-0	Cathode	6.3	0.300	H-W Rect.	395 A.C. Volts Per Plate, RMS, 45 Ma. Output Current. Condenser Input to Filter.										1V	
1V2	T-6½	Diode	9U-0-0	Filament	0.625	0.300	H-W Rect.	Television Service. RF or Flyback Supply. Peak Inverse Volts = 8,250, Output = 0.5 Ma.										1V2	
1V5	T-3	Pentode	8CP-0-0	Filament	1.25	0.040	Power Amp.	Characteristics Same as Type 1AC5.										1V5	
1W4	T-5½	Power Pent.	5BZ-0-0	Filament	1.4	0.050	Power Amp.	45 69.5 67.5 90	4.5 5.0 6.0 9.0	45 69.5 67.5 90	1.6 3.8 3.8 5.0	0.3 0.8 0.8 1.0	400,000 300,000 300,000 250,000	650 875 875 925	20,000 16,000 16,000 12,000	35 90 100 200	1W4	
1W5	T-3	Pentode	8CP-0-0	Filament	1.25	0.040	.01m	2.3	3.5	R-F Amp.	30 67.5	0.0 0.0	30 67.5	0.42 1.85	0.16 0.75	700,000 700,000	430 735	1W5	
1X2	T-6½	Diode	9Y-0-1 etc.	Filament	1.25	0.200	H-W Rect.	Television Service. RF or Flyback Supply. Peak Inverse Volts = 15 KV, Output = 1 Ma.										1X2	
1X2A	T-6½	Diode	9Y-0-1 etc.	Filament	1.25	0.200	H-W Rect.	Television Service. RF or Flyback Supply. Peak Inverse Volts = 17.5 KV, Output = 1 Ma.										1X2A	
1X2B	T-6½	Diode	9Y	Filament	1.25	0.200	H-W Rect.	Television Service. RF or Flyback Supply. Peak Inverse Volts = 22 KV, Output = 0.5 Ma.										1X2B	
1Y2	ST-12	Diode	4P-0-0	Filament	1.5	0.290	H-W Rect.	15,000 A.C. Volts Per Plate, RMS, 2.0 Ma. Output Current.										1Y2	
1Z2	T-5½	Diode	7CB-0-0	Filament	1.5	0.300	H-W Rect.	7,800 Volts RMS Plate, 2.0 Ma. D.C. Output Current.										1Z2	
2A3	ST-16	Triode	4D-0-0	Filament	2.5	2.500	16.0	7.0	5.0	S.T. A1 Amp. P.P.AB1 Amp.	250 300	45.0 62.0	60.0 80-147†, Push Pull, Fixed Bias	800 5,250	4.2	2,500 3,000 \ddagger	3,500 15,000	2A3	
2A4G	ST-12	Gas Triode	5S-0-0	Filament	2.5	2.500	Relay Tube	Instantaneous Forward or Inverse Anode Volts = 200 Peak Anode Amps. = 1.25 Average Anode Current = 0.1 Amp. Max. Averaging Time = 45 Seconds. Cold Starting Time = 2 Seconds.										2A4G	
2A5	ST-14	Beam Pent.	6B-0-0	Cathode	2.5	1.750	Power Amp.	Characteristics Same as Type 6F6G.										2A5	
2A6	ST-12	Duodiode Tri.	6G-0-0	Cathode	2.5	0.800	1.7	1.7	3.8	Det. Amp.	250	2.0	0.9	91,000	1,100	100	2A6	
2A7 2A7S	ST-12	Heptode	7C-0-0 7C-6-0	Cathode	2.5	0.800	0.3m	8.5	9.0	Converter	Characteristics Same as Type 6A7.										2A7 2A7S	
2AF4A 2AF4B	T-5½	Triode	7DK	Cathode	2.35I	0.600	1.9	2.2	1.4	UHF Osc.	100	Grid Resistor = 17.5. Plate Resistor = 220 Ohms. 10,000 Ohms. Grid Current = 750 $\mu\text{a.}$			Type 2AF4B Has Higher Heater-Cathode Voltage Ratings Than Otherwise Identical Type 2AF4A.						6AF4	
2B3	T-9	Diode	8HC-0-7	Filament	1.75	0.250	H-W Rect.	Television Service. Flyback Supplies. Peak Inverse Volts = 22 KV, Output = 0.5 Ma.										2B3	
2B5	T-3	Duotriode	8DP-0-0	Filament	2.4 1.2	0.130 0.260	1.2* 1.2*	0.9* 0.9*	1.9* 2.2*	Amplifier #	90	1.0	2.6	18,700	21.5	2B5	
2B7 2B7S	ST-12	Duodi. Pent.	7D-0-6 7D-6-6	Cathode	2.5	0.800	See Type 6B7			Det. Amp.	Characteristics Same as Type 6B7.										2B7 2B7S	
2BN4	T-5½	Triode	7EG	Cathode	2.3I	0.600	1.2	3.2	1.4	VHF Amp.	Characteristics Same as Type 6BN4. (2BN4 Designed for Series String TV Receivers.)										2BN4	
2C4	T-5½	Gas Triode	5AS-0-0	Cathode	2.5	0.650	Relay Tube	350	50	Peak Cathode Ma. = 20, DC Cathode Ma. = 5, Approx. Drop at 5 Ma. = 16 V.								2C4	
2C21	ST-12	Duotriode	7BH-0-0	Cathode	6.3	0.600	2.4 1.6	2.6 1.6	1.4 2.0	Amplifier Power Amp.	250 250	16.5 60.0	8.3 20.0	7,600	1,375	10.4	20,000	3,500	2C21
2C22	T-9	Triode	4AM-0-0	Cathode	6.3	0.300	3.6	2.2	0.7	Amplifier	300	10.5	11.0	6,600	3,000	20.0	2C22	
2C50	T-9	Duotriode	8BD-0-0	Cathode	12.6	0.300	Amplifier #	200	11	18	3,450	2,900	10	2C50	
2C51	T-6½	Duotriode	8CJ-0-5	Cathode	6.3	0.300	1.3	2.2	1.0	Amplifier	150	240 \ddagger	8.2	6,500	5,500	35	2C51	
2C52	T-9	Duotriode	8BD-0-0	Cathode	12.6	0.300	2.7*	2.3*	0.75*	Amplifier	250	2.0	1.3	1,900	100	2C52	
2CY5	T-5½	Tetrode	7EW-0-2,7	Cathode	2.4I	0.600	.03	4.5	3.0	VHF Amp.	Characteristics Same as Type 6CY5. (2CY5 Designed for Series String TV Receivers.)										2CY5	
2D21	T-5½	Gas Tetrode	7BN-0-0	Cathode	6.3	0.600	.02*	2.4*	1.6*	Relay Tube	400	5	Average Cathode Current = 100 Max. Ma., Averaged over any 30 Sec. Interval.								2D21	
2E5	T-9	Electron Ray	6R-0-0	Cathode	2.5	0.800	Indicator	Characteristics Same as Type 6E5.										2E5	
2E26	T-9	Beam Pent.	7CK-8-1,4,6	Cathode	6.3	0.800	.02*	12.5*	7.0*	Class C Amp.	500	40.0	185	60.0	11.0	Driving Power = 0.12 Watts. D.C. Grid No. 1 Current = 3.0 Ma.			20,000	2E26	
2S/4S	ST-12	Duodiode	5D-4-0	Cathode	2.5	1.350	Detector	The Two Diode Plates each Draw Approximately 40.0 Ma. with 50 Volts D.C. on the Plates.										2S/4S	
2T4	T-5½	Triode	7DK-0-0	Cathode	2.35I	0.600	1.7*	2.6*	0.4*	UHF Osc.	Characteristics Same as Type 6T4. (2T4 Designed for Series String TV Receivers.)										2T4	
2V3G	ST-12	Diode	4Y-0-0	Filament	2.5	5.000	H-W Rect.	6000 A.C. Volts Per Plate, RMS, 2 Ma. Output Current. Condenser Input to Filter.										2V3G	
2W3GT	T-9	Diode	4X-0-0	Filament	2.5	1.500	H-W Rect.	350 A.C. Volts Per Plate, RMS, 55 Ma. Output Current. Condenser Input to Filter.										2W3GT	
2X2A (3)										Characteristics Same as Type 2X2										2X2A (3)		

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. \ddagger Per Tube or Section. \square Applied through 20,000 ohms.
 (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor. ϕ Plate and Target Supply Voltage. ∇ Conversion Transconductance. \ddagger Plate to Plate.
 (3) Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.) \ddagger Maximum Signal. \ddagger Triode Operation. ∇ Approximate. ∇ Cathode Resistor (ohms).
 * maximum.

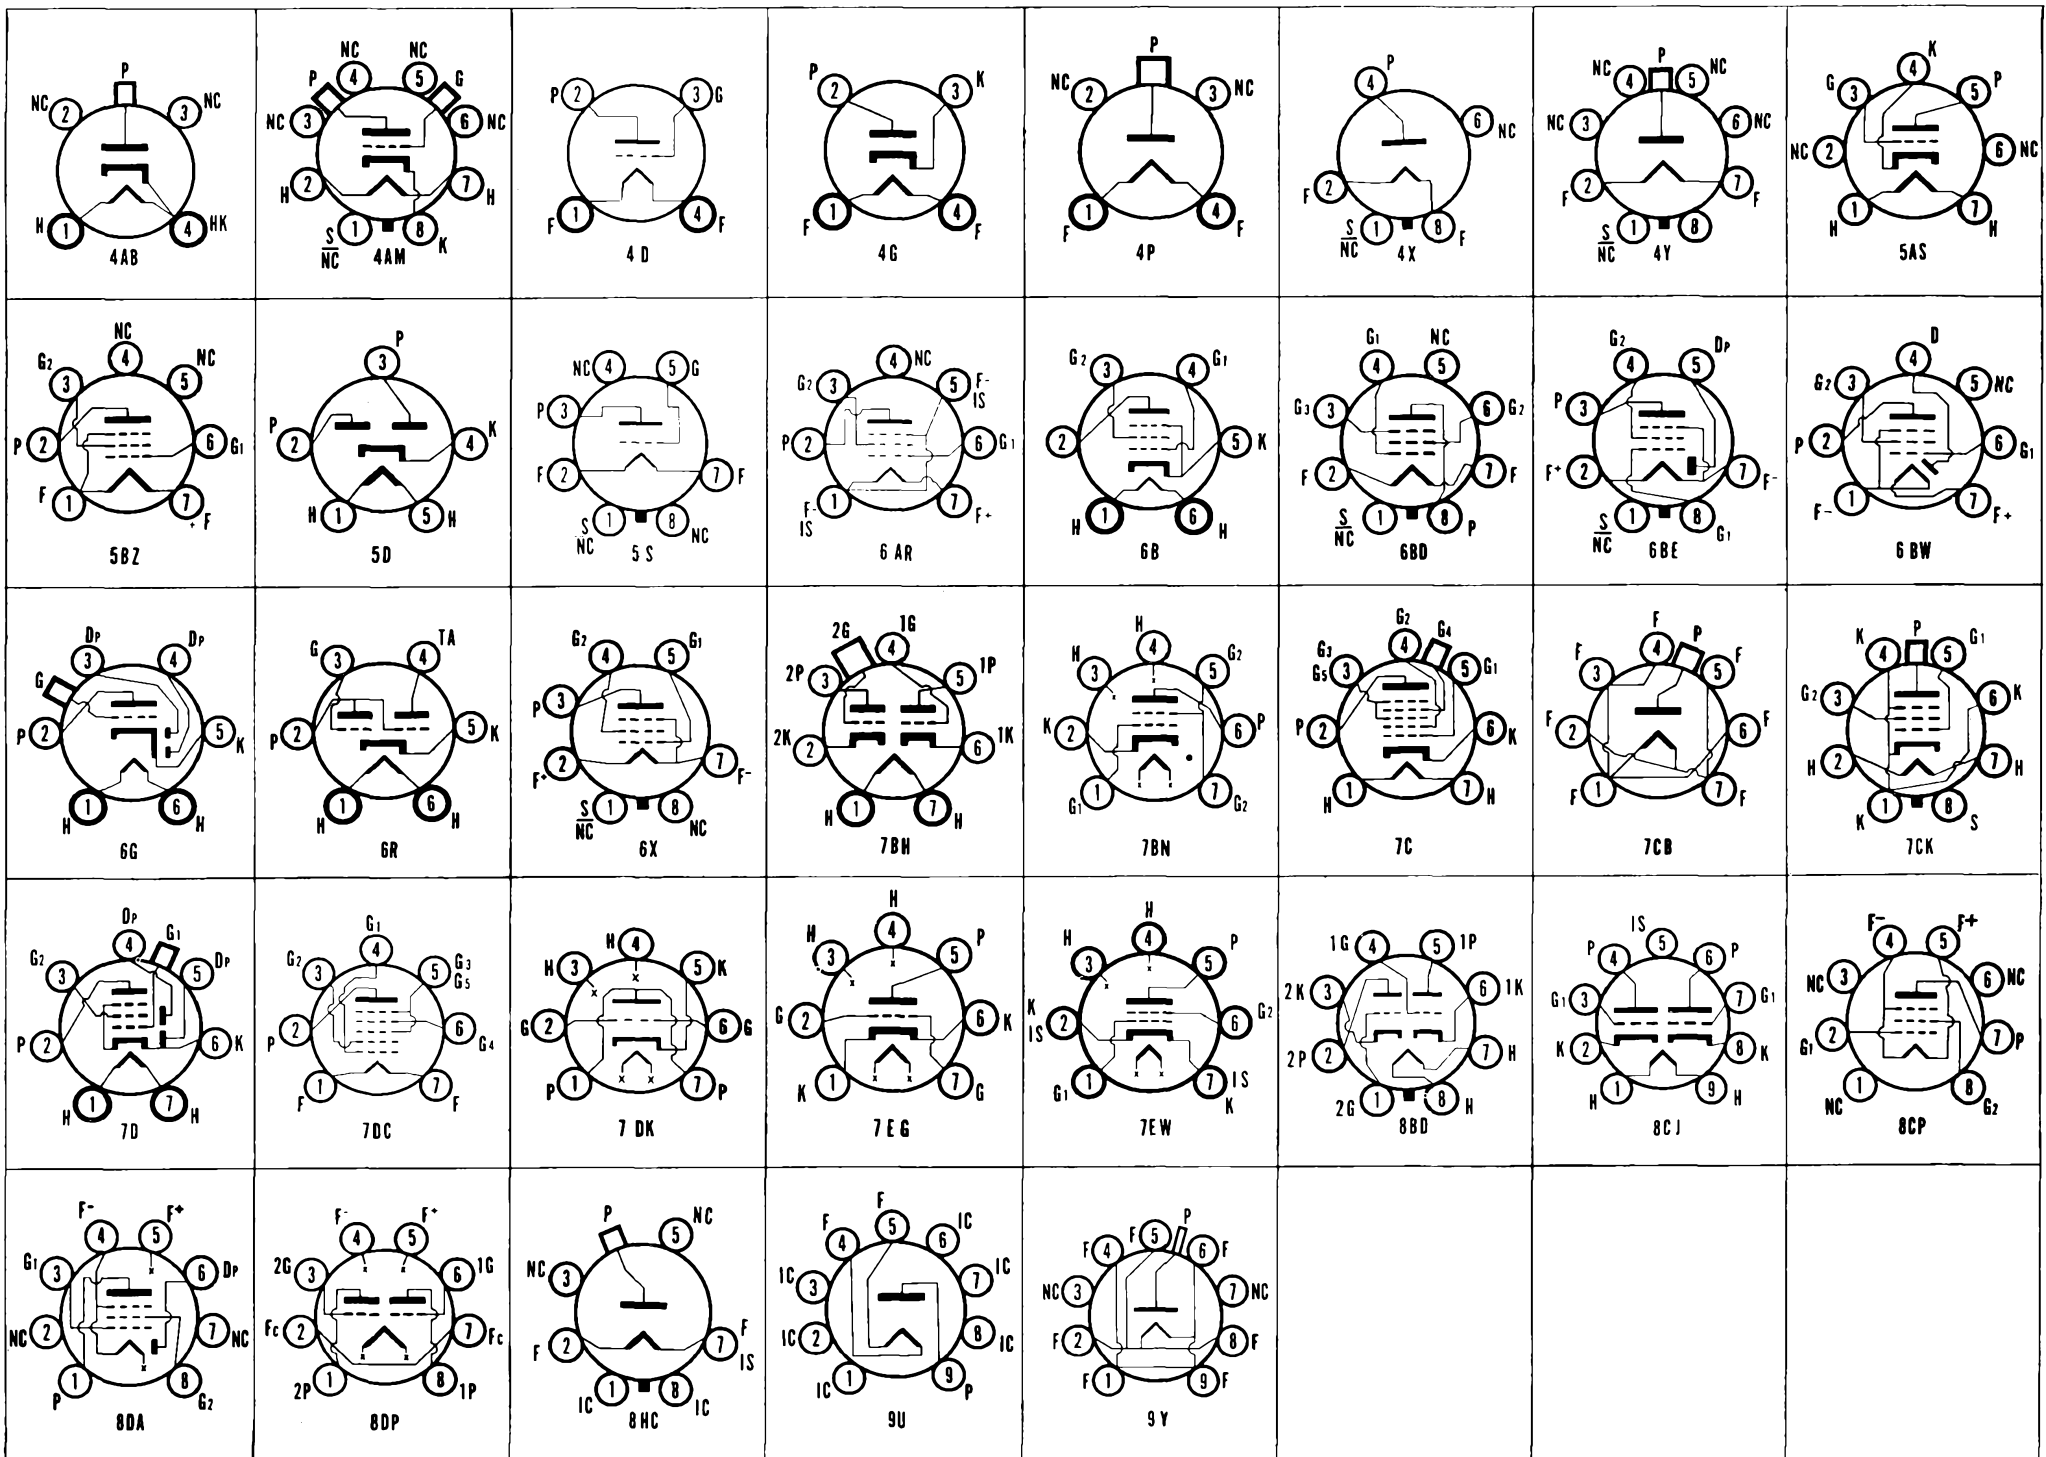

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milliwatts	Type
	Bulb Size or Style	Class	Biasing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
2Z2/G84	ST-12	Diode	4B-0-0	Filament	2.5	1.500	H-W Rect.	350 A.C. Volts Per Plate, RMS, 50 Ma. Output Current.										2Z2/G84
3A2	T-6½	Diode	9DT-0-1	Cathode	3.15	0.220	H-W Rect.	Television Service. Peak Inverse Volts = 18 KV. Peak Current = 80 Ma. Average Current = 1.5 Ma.										3A2
3A3	T-9	Diode	4AC-0-7	Cathode	3.15	0.220	H-W Rect.	Television Service. Peak Inverse Volts = 30 KV. Peak Current = 80 Ma. Average Current = 1.5 Ma.										3A3
3A4	T-5½	Pentode	7BB-0-0	Filament	1.4 2.8	0.200 0.100	0.35m	4.8	7.0	Power Amp.	135 150	7.5 8.4	90 90	14.8 13.3	2.6 2.2	90,000 100,000	1,900 1,900	8,000 8,000	600 700	3A4
3A5	T-5½	Duotriode	7BC-0-0	Filament	1.4 2.8	0.220 0.110	3.0	1.1	1.9	Amplifier	90 135	9.5 20.0	3.7# 30.0	8,300# 1,800#	1,800#	15	8,000 2,000	3A5
3A8GT	T-9	Diode Triode Pentode	8AS-0-1	Filament	1.4 2.8	0.100 0.050	2.0 .012m	2.6 3.0	4.2 10.0	Tri. Amp. Pent. Amp.	90 90	0.0 0.0	0.2 1.5	200,000 800,000	325 750	3A8GT
3AF4A	T-5½	Triode	7DK-0-0	Cathode	3.21	0.450	1.9	2.2	1.4	UHF Osc.	Characteristics Same as Type 2AF4A.										3AF4A
3AL5	T-5½	Duodiode	6BT-0-6	Cathode	3.15	0.600	Detector	Characteristics Same as Type 6AL5. (3AL5 Designed for Series String TV Receivers).										3AL5
3AU6	T-5½	Pentode	7BK-0-2	Cathode	3.15	0.600	.0035m	5.5*	5.0*	R-F Amp.	Characteristics Same as Type 6AU6. (3AU6 Designed for Series String TV Receivers).										3AU6
3AV6	T-5½	Duodiode Tri.	7BT-2-0	Cathode	3.15	0.600	2.1	2.3	0.9	Det. Amp.	Characteristics Same as Type 6AV6. (3AV6 Designed for Series String TV Receivers).										3AV6
3B2	T-12	Diode	8GH-0-7	Cathode	3.15	0.220	H-W Rect.	Television Service. Pulsed Rectifier Service. Max. Peak Inverse Volts = 35 Kv, Output = 1.1 Ma.										3B2
3B4	T-5½	Beam Amp.	7CY	Filament	2.50 1.25	0.165 0.330	0.16	4.6	7.6	VHF Power Amp.	150	75	135	1,700	1,250	3B4
3B5GT	T-9	Beam Amp.	7AP-0-0	Filament	1.4 2.8	0.100 0.050	Power Amp.	45 67.5	4.5 7.0	45 67.5	4.4 6.7	0.3 0.5	100,000 100,000	1,400 1,500	8,000 5,000	70 180	3B5GT
3B7	Lock-in	Duotriode	7BE-L-0	Filament	2.8 1.4	0.110 0.220	2.6	1.4	2.6	Power Amp. Oscillator	135 180	0 0	22.0 25.0	(Class AB2) (Class C)	1,900	20	16,000	1,500	3B7
3BA6	T-5½	Pentode	7BK-0-2	Cathode	3.15	0.600	.0035m*	5.5*	5.0*	I-F or R-F Amplifier	Characteristics Same as Type 6BA6. (3BA6 Designed for Series String TV Receivers).										3BA6
3BC5	T-5½	Pentode	7BD-0-2&7	Cathode	3.15	0.600	.02	6.6	2.6	VHF Amp.	Characteristics Same as Type 6BC5. (3BC5 Designed for Series String TV Receivers).										3BC5
3BE6	T-5½	Heptode	7CH-0-0	Cathode	3.15	0.600	0.1m*	5.5*	8.0*	Converter	Characteristics Same as Type 6BE6. (3BE6 Designed for Series String TV Receivers).										3BE6
3BN4	T-5½	Triode	7EG	Cathode	3.01	0.450	1.2	3.2	1.4	VHF Amp.	Characteristics Same as Type 6BN4. (3BN4 Designed for Series String TV Receivers).										3BN4
3BN6	T-5½	Gated Beam	7DF-0-1	Cathode	3.15	0.600	Quad. Det.	Characteristics Same as Type 6BN6. (3BN6 Designed for Series String TV Receivers).										3BN6
3BU8	T-6½	Duo Pentode	9FG-0-2	Cathode	3.15	0.600	G3 to P 1.9	6.0	3.0	Sync. Sep.	Characteristics Same as Type 6BU8. (3BU8 Designed for Series String TV Receivers.)										3BU8
3BY6	T-5½	Heptode	7CH-0-0	Cathode	3.15	0.600	.08m*	5.4*	7.6*	Sync. Sep.	Characteristics Same as Type 6BY6. (3BY6 Designed for Series String TV Receivers).										3BY6
3BZ6	T-5½	Pentode	7CM-0-7	Cathode	3.15	0.600	.015m	7.5	2.8	VHF Amp.	Characteristics Same as Type 6BZ6. (3BZ6 Designed for Series String TV Receivers).										3BZ6
3C2	T-12	Diode	8FV-0-4,7,8	Filament	3.15/ 1.58	0.210/ 0.420	H-W Rect.	Television Service. Flyback Supplies. Peak Inverse Volts = 28 KV. Output = 1.1 Ma.										3C2
3C5GT	T-9	Pentode	7AP-0-0	Filament	1.4 2.8	0.100 0.050	Power Amp.	90 90	9.0 9.0	90 90	6.0 6.0	1.4 1.4	1,550 1,450	8,000 10,000	240 260	3C5GT
3C6/XXB	Lock-in	Duotriode	7BW-0-0	Filament	1.4 2.8	0.100 0.050	Det. Amp.	90 90 90 90	0 0 0 0	4.5 4.5 4.5 3.2	11,200 11,200 11,200 12,800	1,300 1,300 1,300 1,100	14.5 14.5 14.5 14.1	3C6/XXB
3CB6	T-5½	Pentode	7CM-0-7	Cathode	3.15	0.600	.02m*	6.5*	2.0*	Amplifier	Characteristics Same as Type 6CB6. (3CB6 Designed for Series String TV Receivers).										3CB6
3CE5	T-5½	Pentode	7BD	Cathode	3.15	0.600	.03*	6.5*	1.9*	VHF Amp.	Characteristics Same as Type 6CE5 (3CE5 Designed for Series String TV Receivers).										3CE5
3CF6	T-5½	Pentode	7CM	Cathode	3.15	0.600	.015*	6.5*	3.0*	VHF Amp.	Characteristics Same as Type 6CF6 (3CF6 Designed for Series String TV Receiver)										3CF6
3CS6	T-5½	Heptode	7CH-0-0	Cathode	3.15	0.600	.05* 0.36*	5.5* 7.0*	7.5*	Sync. Separator	Characteristics Same as Type 6CS6. (3CS6 Designed for Series String TV Receivers).										3CS6
3CY5	T-5½	Tetrode	7EW-0-2,7	Cathode	2.9	0.450	.03	4.5	3.0	VHF Amp.	Characteristics Same as Type 6CY5. (3CY5 Designed for Series String TV Receivers).										3CY5
3D6	Lock-in	Beam Pent.	6BA-L-0	Filament	2.8 1.4	0.110 0.220	0.3	7.5	6.5	Power Amp.	150 150	4.5 20.0	90 135	10.2 23.0	1.8 6.0	(Class A) (Class C)	2,400	14,000	600 1,400	3D6
3D21A 3D21B	ST-14 T-12	Beam Pent.	6BU	Cathode	6.3 12.6	1.700 0.850	HV Pulse Blocking Osc. and Modulator	Maximum Peak Positive Pulse Plate Voltage = 5,000 Volts. Maximum Plate Dissipation = 15 Watts.										3D21A 3D21B
3DK6	T-5½	Pentode	7CM-0-7	Cathode	3.15	0.600	.02*	6.3*	1.9*	VHF Amp.	Characteristics Same as Type 6DK6. (3DK6 Designed for Series String TV Receivers).										3DK6
3DT6	T-5½	Gated Beam	7EN-0-0	Cathode	3.15	0.600	.02	Quad. F. M. Det.	Characteristics Same as Type 6DT6. (3DT6 Designed for Series String TV Receivers).										3DT6
3E5	T-5½	Power Pent.	6BX-0-0	Filament	1.4 2.8	0.050 0.025	Class A1 Parallel Fil. Class A1 Series Fil.	67.5 67.5 90	5.0 5.0 7.0	67.5 67.5 90	5.5 4.4 6.8	1.1 0.9 1.4	120,000 130,000 120,000	1,400 1,300 1,450	8,000 11,000 9,000	125 115 225	3E5
3E6	Lock-in	Pentode	7CJ-L-5	Filament	1.4 2.8	0.100 0.050	.007m	5.5	7.5	R-F Amp.	90 90	0 0	90 90	4.2 2.9	1.7 1.2	250,000 325,000	2,000 1,700	3E6
3LE4	Lock-in	Power Pent.	6BA-L-0	Filament	2.8 1.4	0.050 0.100	Power Amp.	90 90	9.0 9.0	90 90	9.0 10.0	1.8 2.0	110,000 100,000	1,600 1,750	6,000 6,000	300 325	3LE4
3LF4	Lock-in	Beam Pent.	6BA-L-0	Filament	1.4 2.8	0.100 0.050	Power Amp.	85 90 110 90 110	5.0 4.5 6.6 4.5 6.6	85 90 110 90 110	7.0 9.5 10.0 8.0 8.5	0.8 1.3 1.4 1.0 1.1	70,000 90,000 100,000 80,000 110,000	1,950 2,200 2,200 2,000 2,000	9,000 8,000 8,000 8,000 8,000	250 270 400 230 330	3LF4
3Q4	T-5½	Power Pent.	7BA-0-0	Filament	1.4 2.8	0.100 0.050	Power Amp.	85 90 90	5.0 4.5 4.5	85 90 90	6.9 9.5 7.7	1.5 2.1 1.7	120,000 100,000 120,000	1,975 2,150 2,000	10,000 10,000 10,000	250 270 240	3Q4
3Q5GT	T-9	Beam Pent.	7AP-0-0	Filament	1.4 2.8	0.100 0.050	Power Amp.	90 90	4.5 4.5	90 90	9.5 8.0	1.3 1.0	90,000 80,000	2,200 2,000	8,000 8,000	270 230	3Q5GT


3S4	T-5½	Power Pent.	7BA-0-0	Filament	1.4 2.8	0.100 0.050	0.3	5.0	7.0	Power Amp.	90	7.0	67.5	7.4	1.4	100,000	1,575	8,000	270	3S4	
3V4	T-5½	Power Pent.	6BX-0-0	Filament	1.4 2.8	0.100 0.050				Power Amp.	Characteristics Same as Type 3Q4.									3V4	
3Z4	T-5½	Power Pent.	7BA	Filament	1.4 2.8	0.050 0.025				Power Amp.	67.5	7.0	67.5	6.5	1.3	100,000	1,450	8,000	210	3Z4	
4A6G	ST-12	Duotriode	8L-0-0	Filament	2.0 4.0	0.120 0.060				Power Amp.	90	1.5		1.1		26,600	750	20	8,000	1,000	4A6G
4AU6	T-5½	Pentode	7BK-0-2	Cathode	4.2X	0.450	.0035*	5.5*	5.0*	R-F Amp.	Characteristics Same as Type 6AU6. (4AU6 Designed for Series String TV Receivers).									4AU6	
4BA6	T-5½	Pentode	7BK	Cathode	4.2X	0.450	.0035*	5.5*	5.0*	R-F Amp.	Characteristics Same as Type 6BA6. (4BA6 Designed for Series String TV Receivers).									4BA6	
4BC5	T-5½	Pentode	7BD-0-2&7	Cathode	4.2X	0.450	.02	6.6	2.6	VHF Amp.	Characteristics Same as Type 6BC5. (4BC5 Designed for Series String TV Receivers).									4BC5	

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
(2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor.
X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
\$ Plate and Target Supply Voltage.
† Maximum Signal.

□ Applied through 20,000 ohms.
▲ Conversion Transconductance.
•• Triode Operation.

†† Plate to Plate.
‡ Approximate.
m maximum.
■ Cathode Resistor (ohms).

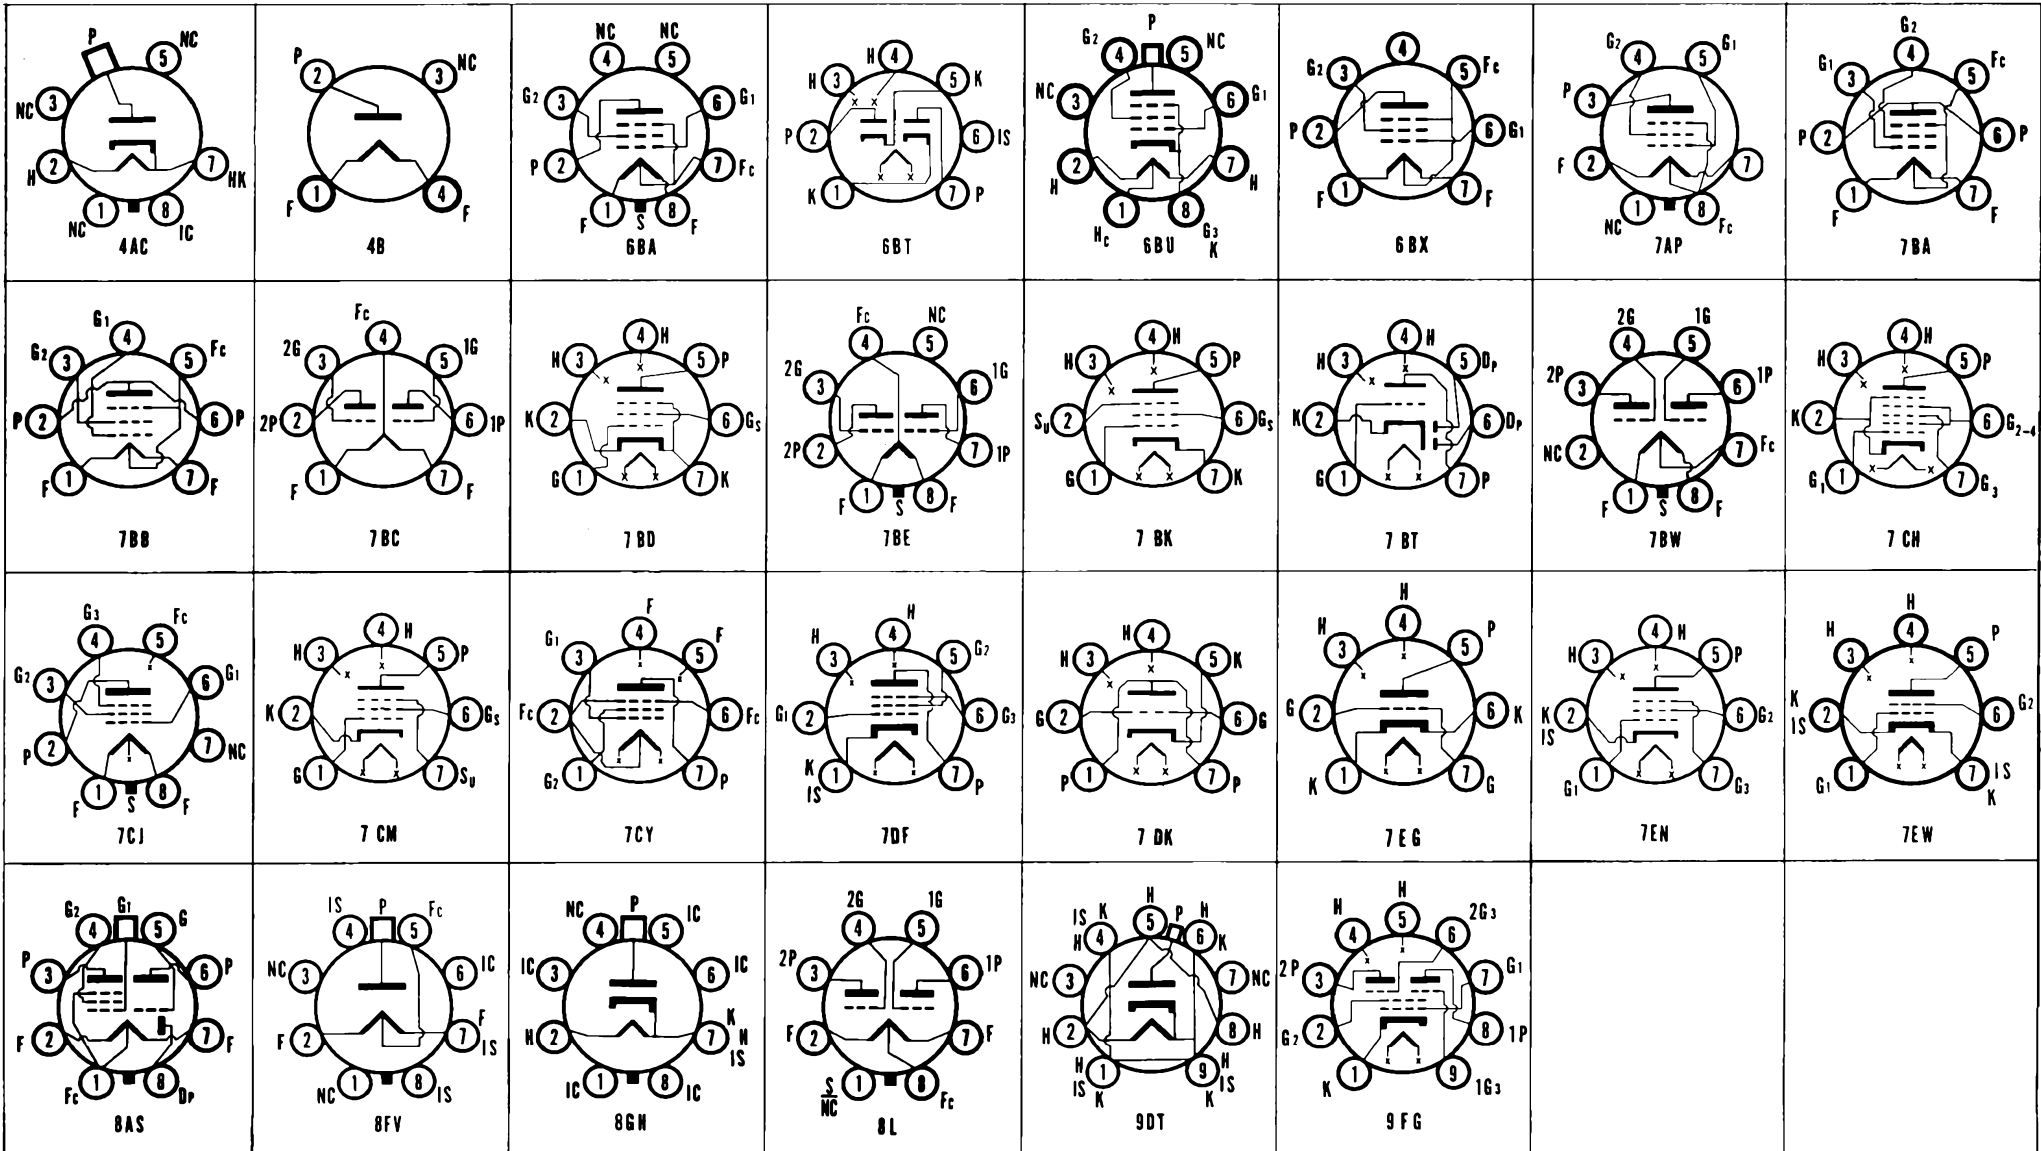

SYMBOLS FOR BASE DIAGRAMS: D_p—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center, Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\mu\text{f}$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
4BC8	T-6½	Duotriode	9A J-0-9	Cathode	4.2I	0.600	1.4	2.5	1.3	Class A1 Amp.	Characteristics Same as Type 6BC8. (4BC8 Designed for Series String TV Receivers).										4BC8
4BE6	T-5½	Heptode	7CH	Cathode	4.2I	0.450	0.3*	7.0*	8.0*	Converter	Characteristics Same as Type 6BE6. (4BE6 Designed for Series String TV Receivers).										4BE6
4BN4	T-5½	Triode	7EG	Cathode	4.2	0.300	1.2	3.2	1.4	VHF Amp.	Characteristics Same as Type 6BN4.										4BN4
4BN6	T-5½	Gated Beam	7DF-0-1	Cathode	4.2I	0.450	Quad. F. M. Det.	Characteristics Same as Type 6BN6. (4BN6 Designed for Series String TV Receivers).										4BN6
4BQ7A	T-6½	Duotriode	9A J-0-9	Cathode	4.2	0.600	1.15	2.85	1.35	VHF Amp.	Characteristics Same as Type 6BQ7A. (4BQ7A Designed for Series String TV Receivers).										4BQ7A
4BS8	T-6½	Duotriode	9AJ	Cathode	4.5I	0.600	1.15	2.6	1.2	VHF Amp.	Characteristics Same as Type 6BS8. (4BS8 Designed for Series String TV Receivers).										4BS8
4BX8	T-6½	Duotriode	9AJ	Cathode	4.5I	0.600	1.4	4.9	2.6	VHF Amp.	Characteristics Same as Type 6BX8. (4BX8 Designed for Series String TV Receivers.)										4BX8
							1.4	2.4	1.25												
4BZ6	T-5½	Pentode	7CM	Cathode	4.2I	0.450	.015m	7.5	2.8	R-F Amp.	Characteristics Same as Type 6BZ6.										4BZ6
4BZ7	T-6½	Duotriode	9A J-0-9	Cathode	4.2I	0.600	1.15	2.5	1.35	VHF Amp.	Characteristics Same as Type 6BZ7. (4BZ7 Designed for Series String TV Receivers).										4BZ7
4BZ8	T-6½	Duotriode	9A J-0-9	Cathode	4.2I	0.600	VHF Amp.	Characteristics Same as Type 6BZ8. (4BZ8 Designed for Series String TV Receivers.)										4BZ8
4CB6	T-5½	Pentode	7CM-0-7	Cathode	4.2I	0.450	.015	6.5	3.0	VHF Amp.	Characteristics Same as Type 6CB6. (4CB6 Designed for Series String TV Receivers).										4CB6
4CE5	T-5½	Pentode	7BD	Cathode	4.2I	0.450	.03*	6.5*	1.9*	VHF Amp.	Characteristics Same as Type 6CE5. (4CE5 Designed for Series String TV Receivers).										4CE5
4CS6	T-5½	Dual Control Heptode	7CH	Cathode	4.2	0.450	.07*	5.5*	7.5*	Sync. Sep.	Characteristics Same as Type 6CS6. (4CS6 Designed for Series String TV Receivers).										4CS6
							0.36*	7.0*	7.5*												
4CX7	T-6½	Duotriode	9FC-0-2	Cathode	4.2I	0.600	1.2	2.4	1.3	Amplifier	Characteristics Same as Type 6CX7. (4CX7 Designed for Series String TV Receivers).										4CX7
4CY5	T-5½	Tetrode	7EW-0-2,7	Cathode	4.5I	0.300	.03	4.5	3.0	VHF Amp.	Characteristics Same as Type 6CY5. (4CY5 Designed for Series String TV Receivers).										4CY5
4DE6	T-5½	Pentode	7CM	Cathode	4.2I	0.450	.015m	6.5	3.0	VHF Amp.	Characteristics Same as Type 4DE6. (4DE6 Designed for Series String Receivers).										4DE6
4DK6	T-5½	Pentode	7CM-0-7	Cathode	4.2I	0.450	.02*	6.3*	1.9*	VHF Amp.	Characteristics Same as Type 6DK6. (4DK6 Designed for Series String TV Receivers).										4DK6
4DT6	T-5½	Gated Beam	7EN-0-0	Cathode	4.2I	0.450	.02	Quad. F. M. Det.	Characteristics Same as Type 6DT6. (4DT6 Designed for Series String TV Receivers).										4DT6
4ES8	T-6½	Duotriode	9DE	Cathode	4.0	0.600	1.85	0.17	VHF Amp.	Characteristics Same as Type 6ES8. (4ES8 Designed for Series String Receivers).										4ES8
5A6	T-6½	Power Pent.	9L-0-0	Filament	5.0	0.230	0.1	8.5	9.5	Class B. Amp. Class C. Amp.	150	15	139.5	40	7	2,800	5A6
							2.5	0.460		150	24	150	40	11	3,100		
5AM8	T-6½	Diode Pent.	9CY-0-0	Cathode	4.7I	0.600	.015	6.0	3.4	Amp. Det.	Characteristics Same as Type 6AM8. (5AM8 Designed for Series String TV Receivers).										5AM8
5AN8	T-6½	Tri. Pentode	9DA-0-9	Cathode	4.7I	0.600	1.5*	2.0*	0.27*	Tri. Amp. Pent. Amp.	Characteristics Same as Type 6AN8. (5AN8 Designed for Series String TV Receivers).										5AN8
							.04m*	7.0*	2.3*												
5AQ5	T-5½	Beam Pent.	7BZ-0-0	Cathode	4.7I	0.600	0.4*	8.0*	8.5*	Power Amp.	Characteristics Same as Type 6AQ5 (5AQ5 Designed for Series String TV Receivers).										5AQ5
5AS8	T-6½	Diode Pent.	9DS-0-7	Cathode	4.7I	0.600	.02*	7.0*	2.4*	Det. Amp.	Characteristics Same as Type 6AS8. (5AS8 Designed for Series String TV Receivers).										5AS8
5AT8	T-6½	Tri. Pentode	9DW-0-0	Cathode	4.7I	0.600	1.5	2.4	1.0	Tri. Osc. Converter	Characteristics Same as Type 6AT8. (5AT8 Designed for Series String TV Receivers).										5AT8
							.016m	4.7	1.6												
5AV8	T-6½	Tri. Pentode	9DZ-0-7	Cathode	4.7I	0.600	1.5*	2.0*	0.34*	Tri. Amp. Pent. Amp.	Characteristics Same as Type 6AN8. (5AV8 Designed for Series String TV Receivers).										5AV8
							.04m*	7.0*	3.0*												
5AW4	T-12	Duodiode	5T-0-0	Filament	5.0	4.000	F-W Rect.	450 A.C. Volts Per Plate, RMS, 250 Ma. Output Current with Cap. Input to Filter. Peak Current = 750 Ma. Per Plate.										5AW4
5AX4GT	T-9	Duodiode	5T-0-0	Filament	5.0	2.250	F-W Rect.	350 A.C. Volts Per Plate, R.M.S., 150 Ma. D.C. Output Current. Condenser Input to Filter. 500 A.C. Volts Per Plate, R.M.S., 150 Ma. D.C. Output Current. Choke Input to Filter.										5AX4GT
5AZ4	Lock-in	Duodiode	5T-L-0	Filament	5.0	2.000	F-W Rect.	Characteristics Same as Type 5Y3GT.										5AZ4
5B8	T-6½	Tri. Pentode	9EC-0-1	Cathode	4.7I	0.600	1.7*	1.9*	1.4*	Tri. Amp. Pent. Amp.	200	6	13	5,750	3,300	19	5B8
							.05m*	6.0*	2.6*		200	180*	150	9.5	2.8	300,000	6,200	(5B8 Designed for Series String TV Receivers).	
5BE8	T-6½	Tri. Pentode	9EG-0-3	Cathode	4.7I	0.600	1.8*	2.8*	1.5*	Tri. Osc. Converter	Characteristics Same as Type 6U8. (5BE8 Designed for Series String TV Receivers).										5BE8
							.04m*	4.4*	2.6*												
5BK7A	T-6½	Duotriode	9A J-0-9	Cathode	4.7I	0.600	1.8	3.0	1.0	VHF Amp.	Characteristics Same as Type 6BK7A. (5BK7A Designed for Series String TV Receivers).										5BK7A
							1.8	3.0	0.9												
5BQ7A	T-6½	Duotriode	9A J-0-9	Cathode	5.6I	0.450	1.2	2.6	1.2	VHF Amp.	Characteristics Same as Type 6BQ7A. (5BQ7A Designed for Series String TV Receivers).										5BQ7A
5BR8	T-6½	Triode Pentode	9FA	Cathode	4.7I	0.600	.008	5.0	3.5	Osc. Mixer	Characteristics Same as Type 6BR8. (5BR8 Designed for Series String TV Receivers).										5BR8
							1.8	2.5	1.0												
5BT8	T-6½	Duodi. Pent.	9FE	Cathode	4.7I	0.600	.04m*	7.0*	2.3*	Amp. Det.	Characteristics Same as Type 6BT8. (5BT8 Designed for Series TV Receivers).										5BT8
5BW8	T-6½	Duodi. Pent.	9HK	Cathode	4.7I	0.600	.02m*	4.8*	2.6*	R-F or I-F Amplifier	Characteristics Same as Type 6BW8. (5BW8 Designed for Series String Receivers).										5BW8
5BZ7	T-6½	Duotriode	9A J-0-9	Cathode	5.6I	0.450	1.2	2.5	1.35	VHF Amp.	Characteristics Same as Type 6BZ7. (5BZ7 Designed for Series String TV Receivers).										5BZ7
							1.2	4.9	2.27												
5CG4	T-9	Duodiode	5L	Cathode	5.0	2.0	F-W Rect.	350 A.C. Volts Per Plate, RMS, 125 Ma. Max. D.C. Output Current.										5CG4
5CG8	T-6½	Tri. Pentode	9GF	Cathode	4.7I	0.600	1.5	2.4	1.0	Osc. Mixer	Characteristics Same as 6CG8 (5CG8 Designed for Series String TV Receivers.)										5CG8
							.02	4.8	1.6												
5CL8	T-6½	Tri. Tetrode	9FX	Cathode	4.7I	0.600	1.8	2.7	1.2	Osc. Mixer	Characteristics Same as Type 6CL8. (5CL8 Designed for Series String TV Receivers.)										5CL8
							.016m	5.0	3.0												
5CL8A	T-6½	Tri. Tetrode	9FX	Cathode	4.7I	0.600	1.8	2.7	1.2	VHF Osc. VHF Amp.	Characteristics Same as Type 6CL8A. (5CL8A Designed for Series String Receivers).										5CL8A
							.01	5	3.4												
5CM6	T-6½	Beam Pent.	9CK	Cathode	4.7I	0.600	0.7	8.0	8.5	Power Amp.	Characteristics Same as Type 6CM6. (5CM6 Designed for Series String TV Receivers).										5CM6
5CM8	T-6½	Tri. Pentode	9FZ	Cathode	4.7I	0.600	1.9	1.6	0.22	Class A1 Amp.	Characteristics Same as 6CM8. (5CM8 Designed for Series String TV Receivers.)										5CM8
							.04m	6.0	2.6												
5CQ8	T-6½	Tri. Tetrode	9GE	Cathode	4.7I	0.600	1.8	2.7	1.2	VHF Tri. Osc. VHF Pent. A.	Characteristics Same as Type 6CQ8. (5CQ8 Designed for Series String TV Receivers).										5CQ8
							.015	5.0	3.3												
5CR8	T-6½	Tri. Pentode	9GJ	Cathode	4.7I	0.600	1.6*	2.0*	1.4*	Tri. Amp. Pent. Amp.	Characteristics Same as Type 6CR8. (5CR8 Designed for Series String Receivers).										5CR8
							.018*	6.0*	2.8*												

5CZ5	T-6½	Beam Pent.	9HN	Cathode	4.7I	0.600	0.4*	6.0*	6.0*	Vert. Defl. Amp.	Characteristics Same as Type 6CZ5. (5CZ5 Designed for Series String TV Receivers).										5CZ5	
5DH8	T-6½	Tri. Pentode	9EG	Cathode	5.2I	0.600	1.6* .03m*	2.4* 6.5*	1.4* 2.2*	Vert. Osc. Video Amp.	250 125	390 56	125	7.3 13.5	3.8	12,000 150,000	4,400 8,600	53	5DH8
5EA8	T-6½	Tri. Pentode	9AE	Cathode	4.7I	0.600	1.7 .01	3.2 5	1.1 3.4	Tri. VHF Amp. Pent VHF Amp	Characteristics Same as Type 6EA8. (5EA8 Designed for Series String Receivers).										5EA8	


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
 (2) Converter tube capacitances given are signal grid to plate, RF Input, Mixer Output.
 (4) Average Contact potential bias developed across specified grid resistor.
 X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

‡ Per Tube or Section.
 § Plate and Target Supply Voltage.
 † Maximum Signal.

□ Applied through 20,000 ohms.
 ▲ Conversion Transconductance.
 ** Triode Operation.

¶ Plate to Plate.
 † Approximate.

m maximum.
 ■ Cathode Resistor (ohms).

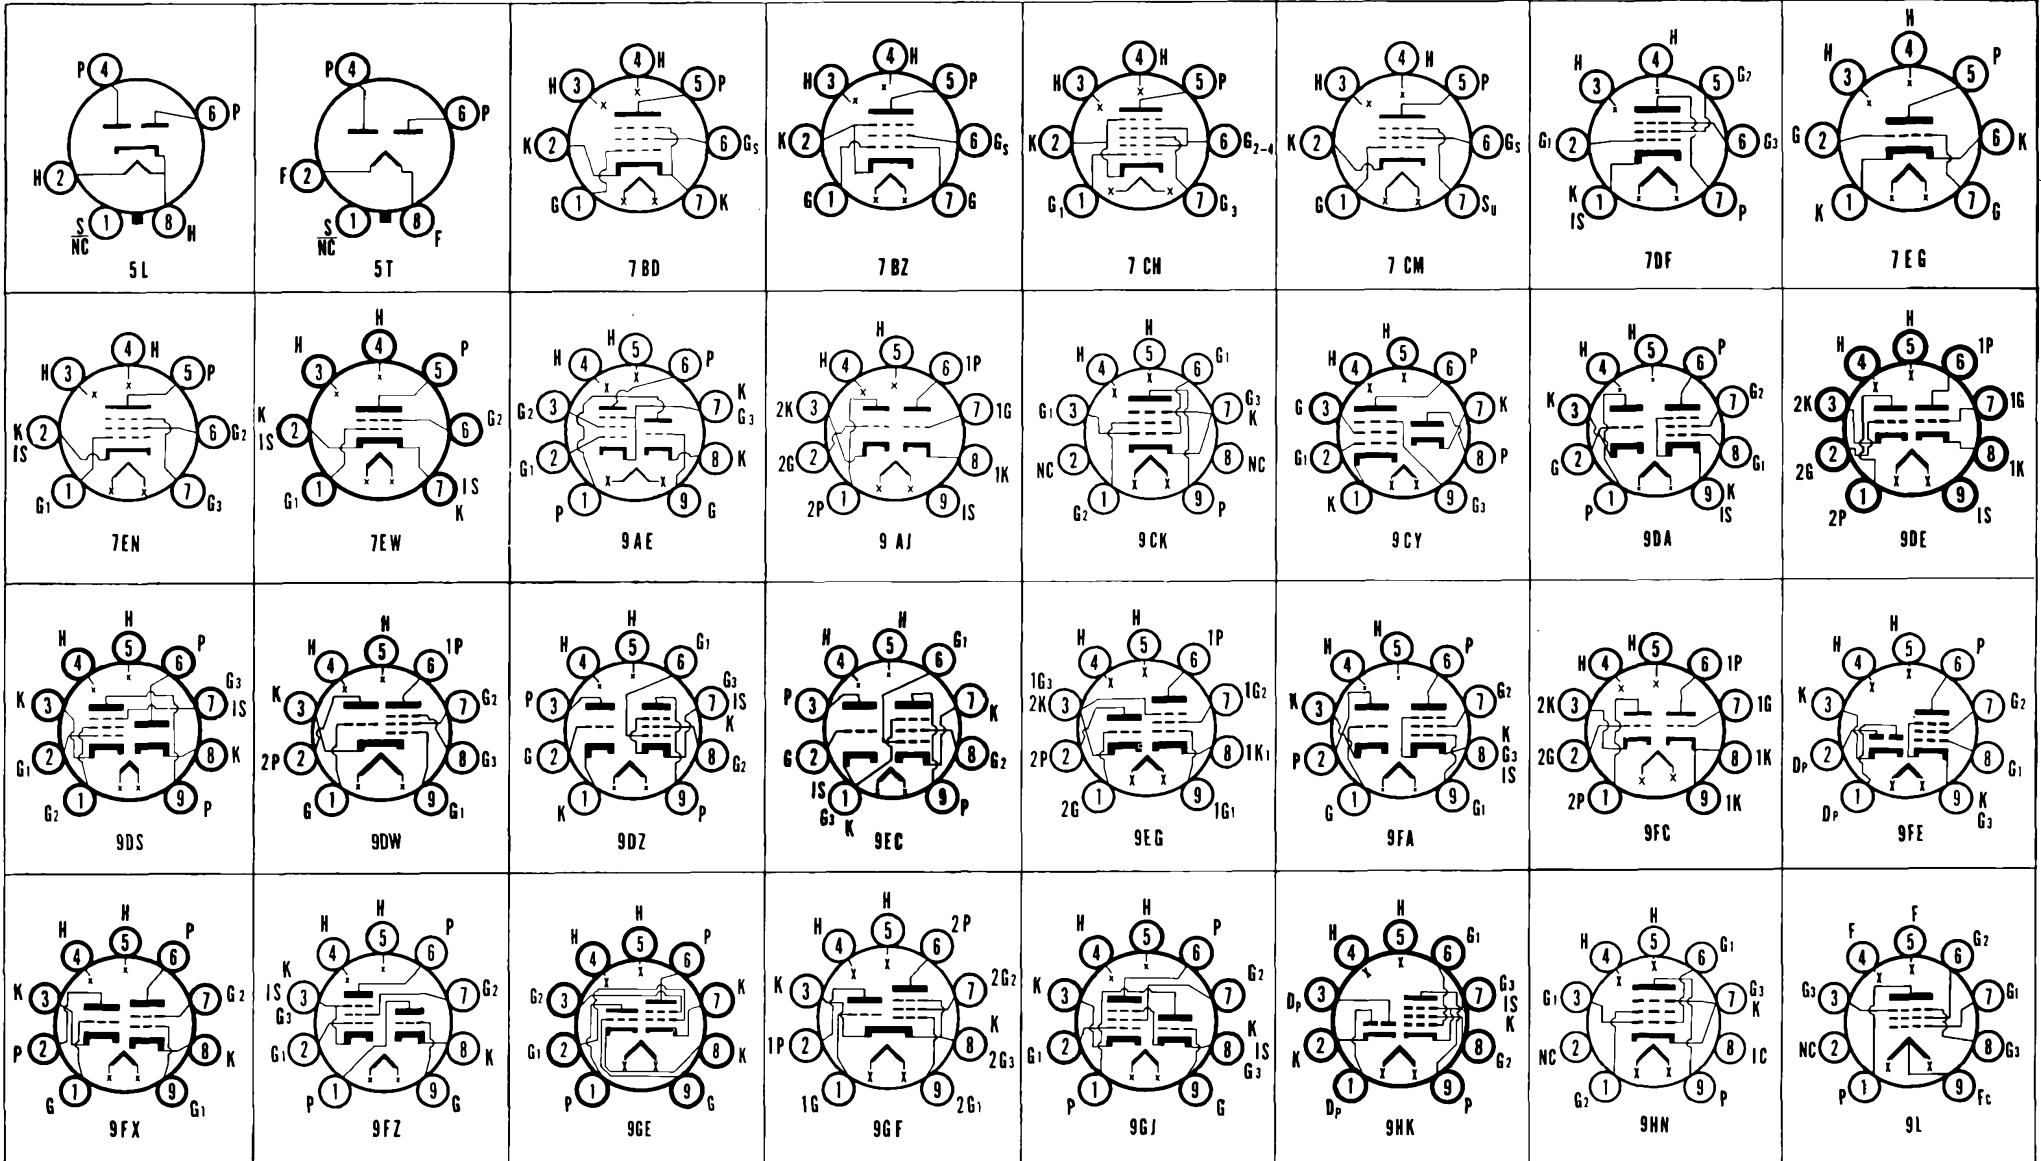

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Re—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu\text{f}$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milliwatts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
5J6	T-5½	Duodiode	7BF-0-0	Cathode	4.7I	0.600	1.5 1.5	2.6 2.6	1.6 1.0	R-F Amp. Osc. Amp.	Characteristics Same as Type 6J6. (5J6 Designed for Series String TV Receivers).										5J6	
5R4GY 5R4GYA	ST-16 T-12	Duodiode	5T-0-0	Filament	5.0	2.000	F-W Rect.	900 Volts RMS Per Plate, 150 Ma. D-C Output, Condenser Input to Filter. 950 Volts RMS Per Plate, 175 Ma. D-C Output, Choke Input to Filter.										5R4GY 5R4GYA	
5T4	Metal	Duodiode	5T-0-0	Filament	5.0	2.000	Rectifier	450 A.C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter. 550 A.C. Volts Per Plate, RMS, 225 Ma. Output Current. Choke Input to Filter.										5T4	
5T8	T-6½	Triple Dio. Tri.	9E-0-3&7	Cathode	4.7I	0.600	1.7	1.7	2.4	Det. Amp.	Characteristics Same as Type 6T8. (5T8 Designed for Series String TV Receivers).										5T8	
5U4G	ST-16	Duodiode	5T-0-0	Filament	5.0	3.000	F-W Rect.	450 A.C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.										5U4G	
5U4GA	T-11	Duodiode	5T-0-0	Filament	5.0	3.000	F-W Rect.	450 A.C. Volts Per Plate, RMS, 250 Ma. Output Current with Cap. Input to Filter. Peak Current = 900 Ma. Per Plate. 5U4GA										5U4GA	
5U4GB	T-12	Duodiode	5T-0-0	Filament	5.0	3.000	F-W Rect.	450 A.C. Volts Per Plate, RMS, 275 Ma. Output Current with Cap. Input to Filter. Peak Current = 1 Amp. Per Plate. 5U4GB										5U4GB	
5U4WG (3)	T-12	Duodiode	5T-0-0	Filament	5.0	3.000	F-W Rect.	Characteristics Same as Type 5U4G.										5U4WG (3)	
5U8	T-6½	Tri. Pentode	9AE-0-7	Cathode	4.7I	0.600	1.8 .006m	2.5 5.0	1.0 3.5	VHF Osc. VHF Mixer	Characteristics Same as Type 6U8. (5U8 Designed for Series String TV Receivers).										5U8	
5V3	T-12	Duodiode	5T-0-0	Filament	5.0	3.800	F-W Rect.	425 A.C. Volts Per Plate, RMS, 350 Ma. Output Current. Capacitor Input to Filter. 500 A.C. Volts Per Plate, RMS, 350 Ma. Output Current. Choke Input to Filter.										5V3	
5V4G	ST-14	Duodiode	5L-0-0	Cathode	5.0	2.000	F-W Rect.	375 A.C. Volts Per Plate, RMS, 175 Ma. Output Current. Condenser Input to Filter.										5V4G	
5V4GA	T-12	Duodiode	5L-0-0	Cathode	5.0	2.000	F-W Rect.	375 A.C. Volts Per Plate, RMS, 175 Ma. Output Current with Cap. Input to Filter. Peak Current = 525 Ma. per Plate. 5V4GA										5V4GA	
5V6GT	T-9	Beam Pent.	7S-0-0	Cathode	4.7I	0.600	0.7*	9.0*	7.5*	Power Amp.	Characteristics Same as Type 6V6GT. (5V6GT Designed for Series String TV Receivers).										5V6GT	
5W4 5W4GT	Metal T-9	Duodiode	5T-1-0 5T-0-0	Filament	5.0	1.500	F-W Rect.	350 A.C. Volts Per Plate, RMS, 110 Ma. Output Current. Condenser Input to Filter.										5W4 5W4GT	
5X3	ST-14	Duodiode	4C-0-0	Filament	5.0	2.000	Rectifier	400 A.C. Volts Per Plate, RMS, 110 Ma. Output Current. Choke or Condenser Input to Filter. 1275 A.C. Volts Per Plate, RMS, 30 Ma. Output Current. Choke or Condenser Input to Filter.										5X3	
5X4G	ST-16	Duodiode	5Q-0-0	Filament	5.0	3.000	F-W Rect.	450 A.C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.										5X4G	
5X4GA	T-12	Duodiode	5Q-0-0	Filament	5.0	3.000	F-W Rect.	450 A.C. Volts Per Plate, RMS, 250 Ma. Output Current. Capacitor Input to Filter.										5X4GA	
5X8	T-6½	Tri. Pentode	9AK-0-0	Cathode	4.7I	0.600	1.4 .06	2.6 4.5	1.0 1.4	Oscillator Mixer	Characteristics Same as Type 6X8. (5X8 Designed for Series String TV Receivers).										5X8	
5Y3GT 5Y3GA	T-9 T-12	Duodiode	5T-0-0	Filament	5.0	2.000	F-W Rect.	350 A.C. Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter. 500 A.C. Volts Per Plate, RMS, 125 Ma. Output Current. Choke Input to Filter.										5Y3GT 5Y3GA	
5Y4GT 5Y4GA	T-9 T-12	Duodiode	5Q-0-0	Filament	5.0	2.000	F-W Rect.	Characteristics Same as Type 5Y3GT.										5Y4GT 5Y4GA	
5Z3	ST-16	Duodiode	4C-0-0	Filament	5.0	3.000	F-W Rect.	450 A.C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.										5Z3	
5Z4 5Z4GT	Metal T-9	Duodiode	5L-1-0 5L-0-0	Cathode	5.0	2.000	F-W Rect.	350 A.C. Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter.										5Z4 5Z4GT	
6A3	ST-16	Power Triode	4D-0-0	Filament	6.3	1.000	16.0	7.0	5.0	S.T. A1 Amp. P.P.AB1 Amp. P.P.AB1 Amp.	250 325 325	45.0 68.0	60.0 80-147; 80-100†	800 (Push Pull, Fixed Bias) 5,250 (Push Pull, Self Bias Resistor 850 Ohms)	4.2	2,500 3,000† 5,000†	3,200 15,000	6A3		
6A4/LA	ST-14	Power Pent.	5B-0-0	Filament	6.3	0.300	Power Amp.	135 180	9.0 12.0	135 180	13.0 22.0	2.8 3.9	52,600 60,000	2,100 2,500	150 150	9,500 8,000	700 1,500	6A4/LA	
6A5G	ST-16	Triode	6T-0-0	Cathode	6.3	1.250	S.T. A1 Amp. P.P.AB1 Amp.	250 325	45.0 68.0	60.0 40.0 Per Tube, Push Pull, Fixed Bias	300 5,250	4.2	2,500 3,000†	3,750 15,000	6A5G		
6A6	ST-14	Duodiode	7B-0-0	Cathode	6.3	0.800	Power Amp. Driver Driver	300 250 294	0.0 5.0 6.0	17.5-35† 6.0	Per Plate, Class B Push-Pull Operation Sections Paralled	11,300 3,100 3,200	35 35	10,000† (Class A Driver)	10,000 (Class A Driver)	6A6		
6A7, 6A7S	ST-12	Heptode	7C-0-0	Cathode	6.3	0.300	0.3	8.5	9.0	Converter	Characteristics Same as Type 6A8G, Except Capacitances										6A7, 6A7S	
6A8 6A8G 6A8GT	Metal ST-12 T-9	Heptode	8A-1-0 8A-0-0 8A-1-0	Cathode	6.3	0.300	.06 0.26 0.26	12.0 9.5 9.5	12.0 12.0 12.0	Converter	100 250	1.5 3.0	50 100	1.1 3.5	1.3 2.7	600,000 360,000	360 A 550 A	($G_a = 100V, 2.0 Ma.$) ($G_a = 250 V, \square, Max., 4.0 Ma.$)	6A8 6A8G 6A8GT	
6AB4	T-5½	Triode	5CE-0-2	Cathode	6.3	0.150	1.5	2.2	1.4	R-F Amp.	250	200*	10	10,900	5,500	60	6AB4	
6AB5/6N5	T-9	Electron Ray	6R-0-0	Cathode	6.3	0.150	Indicator	135§	(Series Plate Resistor 0.25 Meg., Target Current 2.0 Ma., Grid Bias = 10 for 0° Shadow.)										6AB5/6N5
6AB6G	ST-12	Duodiode	7AU-0-0	Cathode	6.3	0.500	Power Amp.	250 250	0	Input Tri. Output Tri.	5.0 34.0	40,000	1,800	8,000	3,500	6AB6G	
6AB7	Metal	Pentode	8N-1-1	Cathode	6.3	0.450	.015m	8.0	5.0	Amplifier	300	3.0	200	12.5	3.2	700,000 †	5,000	3,500	6AB7	
6AC5GT	T-9	Triode	6Q-0-0	Cathode	6.3	0.400	Power Amp.	250 250 250	+13 (Bias from 76 Driver) 39.0 39.0 10-80† (Class A1, One Tube, Dynamic Coupled) (Class B, Two Tubes)	36,700 3,400	125	7,000 10,000†	3,700 8,000	6AC5GT	
6AC6GT	T-9	Duodiode	7W-0-0	Cathode	6.3	1.100	Power Amp.	180 180	0.0 0.0	7.0 45.0	(Input Section) (Output)	180,000	3,000	54	3,500	3,600	6AC6GT	
6AC7	Metal	Pentode	8N-1-1	Cathode	6.3	0.450	.015m	11.0	5.0	Video Amp.	300	160*	150	10.0	2.5	1.0 Meg. †	9,000	6,750 †	6AC7	
6AD4	T-3	Triode	8DK-0-0	Cathode	6.3	0.150	0.7	1.9	2.2	Osc. Amp.	100	820*	1.4	35,000	2,000	70	6AD4	
6AD5G, GT	ST-12, T-9	Triode	6Q-0-0	Cathode	6.3	0.300	3.3*	4.1*	3.9*	Amplifier	250	2.0	0.9	66,000	1,500	100	6AD5G, GT	
6AD6G	T-9	Electron Ray	7AG-0-0	Cathode	6.3	0.150	Indicator	100§ (Ray Control Volts = 45 Approx. For 0° Shadow, Approx. = 23 Volts for 135° Shadow.) 150§ (Ray Control Volts = 75 Approx. For 0° Shadow, Approx. = 50 Volts for 135° Shadow.)	6AD6G	
6AD7G	ST-14	Tri. Pentode	8AY-0-0	Cathode	6.3	0.850	Tri. Amp. Pent. Amp.	250 250	25.0 16.5 250	4.0 34.0 6.5	19,000 † 80,000 †	325 2,500	6	7,000	3,200	6AD7G	
6AE5GT	T-9	Triode	6Q-0-0	Cathode	6.3	0.300	Amplifier	95	15	7.0	3,500	1,200	4.2	6AE5GT	
6AE6G	ST-12	Duo Plate Triode	7AH-0-0	Cathode	6.3	0.150	Remote Cut-Off Sharp Cut-Off	250 250 250	1.5 35.0 1.5	6.5 0.01 4.5	2,500 3,500	1,000	25	6AE6G	

6AE7GT	T-9	Duotriode	7AX-0-0	Cathode	6.3	0.500	2.5 2.5	3.0 3.0	1.8 1.8	Amplifier	250 (Driver for P.P. 6AC5GT = 250 V. 10 Ma., 6AC5GT Plate Ma. = 64. Output 9.5 Watts with 10,000 Ohms Load Bias Developed in Circuit.)	13.5	10.0	4,650	3,000	14	6AE7GT
6AF3	T-6½	Diode	9CB	Cathode	6.3	1.200				T.V. Dampner	Maximum Peak Inverse Plate Voltage = 4,500 Volts. Maximum D.C. Plate Current = 185 Ma.					6AF3	
6AF4A 6AF4	T-5½	Triode	7DK	Cathode	6.3	0.225	1.9	2.2	1.4	UHF Osc.	100	Grid Resistor = 17. 10,000 Ohms.	Plate Resistor = 220 Ohms. Grid Current = 750 µa.				6AF4A
6AF5G	ST-12	Triode	6Q-0-0	Cathode	6.3	0.300				Amplifier	180	18.0	7.0	4,900	1,500	7.4	6AF5G
6AF6G	T-9	Twin Elec. Ray	7AG-0-0	Cathode	6.3	0.150				Indicator	100§ (Ray Control Volts = Approx. 60 for 0° Shadow, Approx. Zero Volts for 100° Shadow.) 135§ (Ray Control Volts = Approx. 81 for 0° Shadow, Approx. Zero Volts for 100° Shadow.)					6AF6G	


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
 (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output.
 (4) Average Contact potential bias developed across specified grid resistor.
 X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

§ Per Tube or Section.
 † Plate and Target Supply Voltage.
 ‡ Maximum Signal.


□ Applied through 20,000 ohms.
 ▲ Conversion Transconductance.
 ** Triode Operation.

¶ Plate to Plate.
 † Approximate.

m maximum.
 ■ Cathode Resistor (ohms).

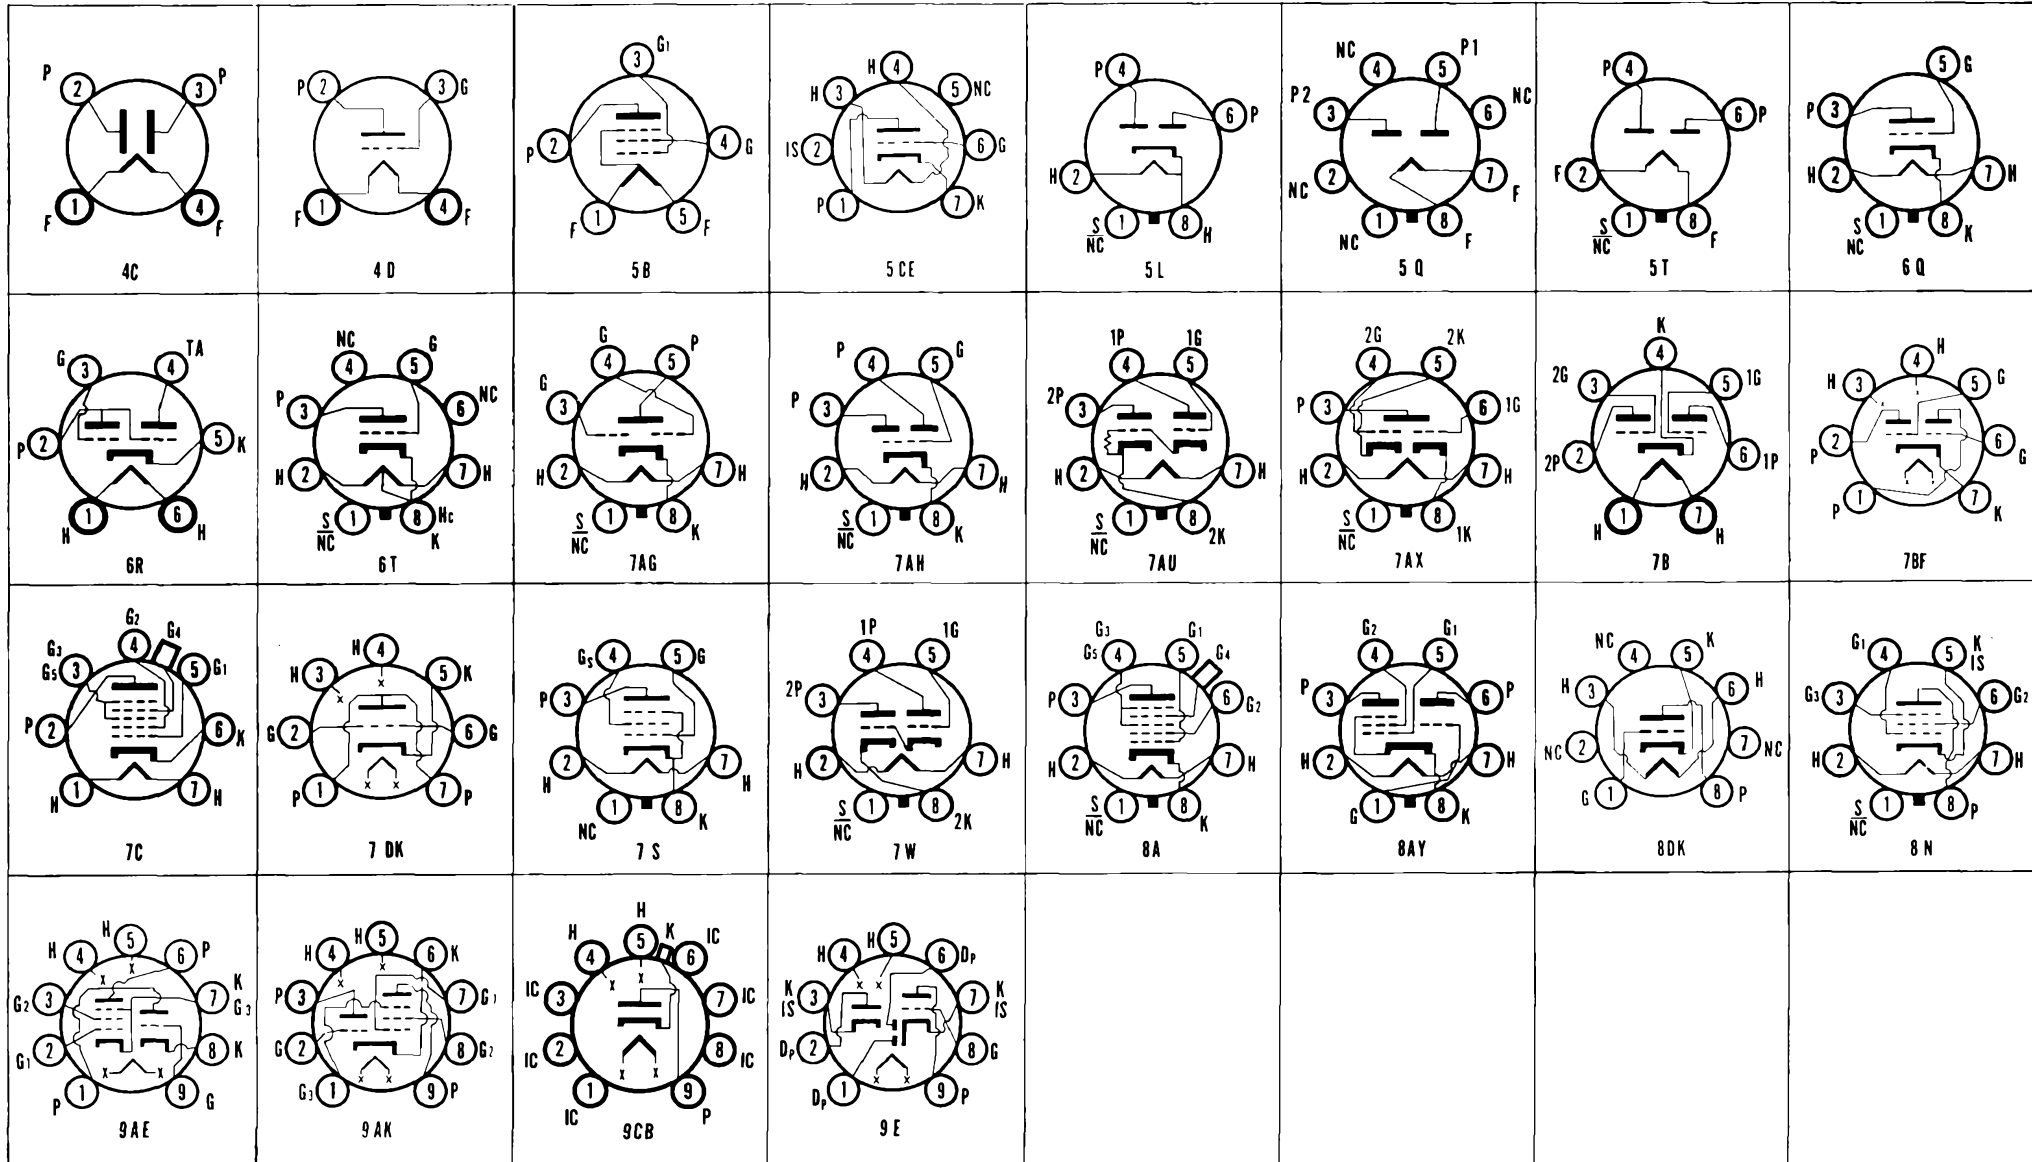

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

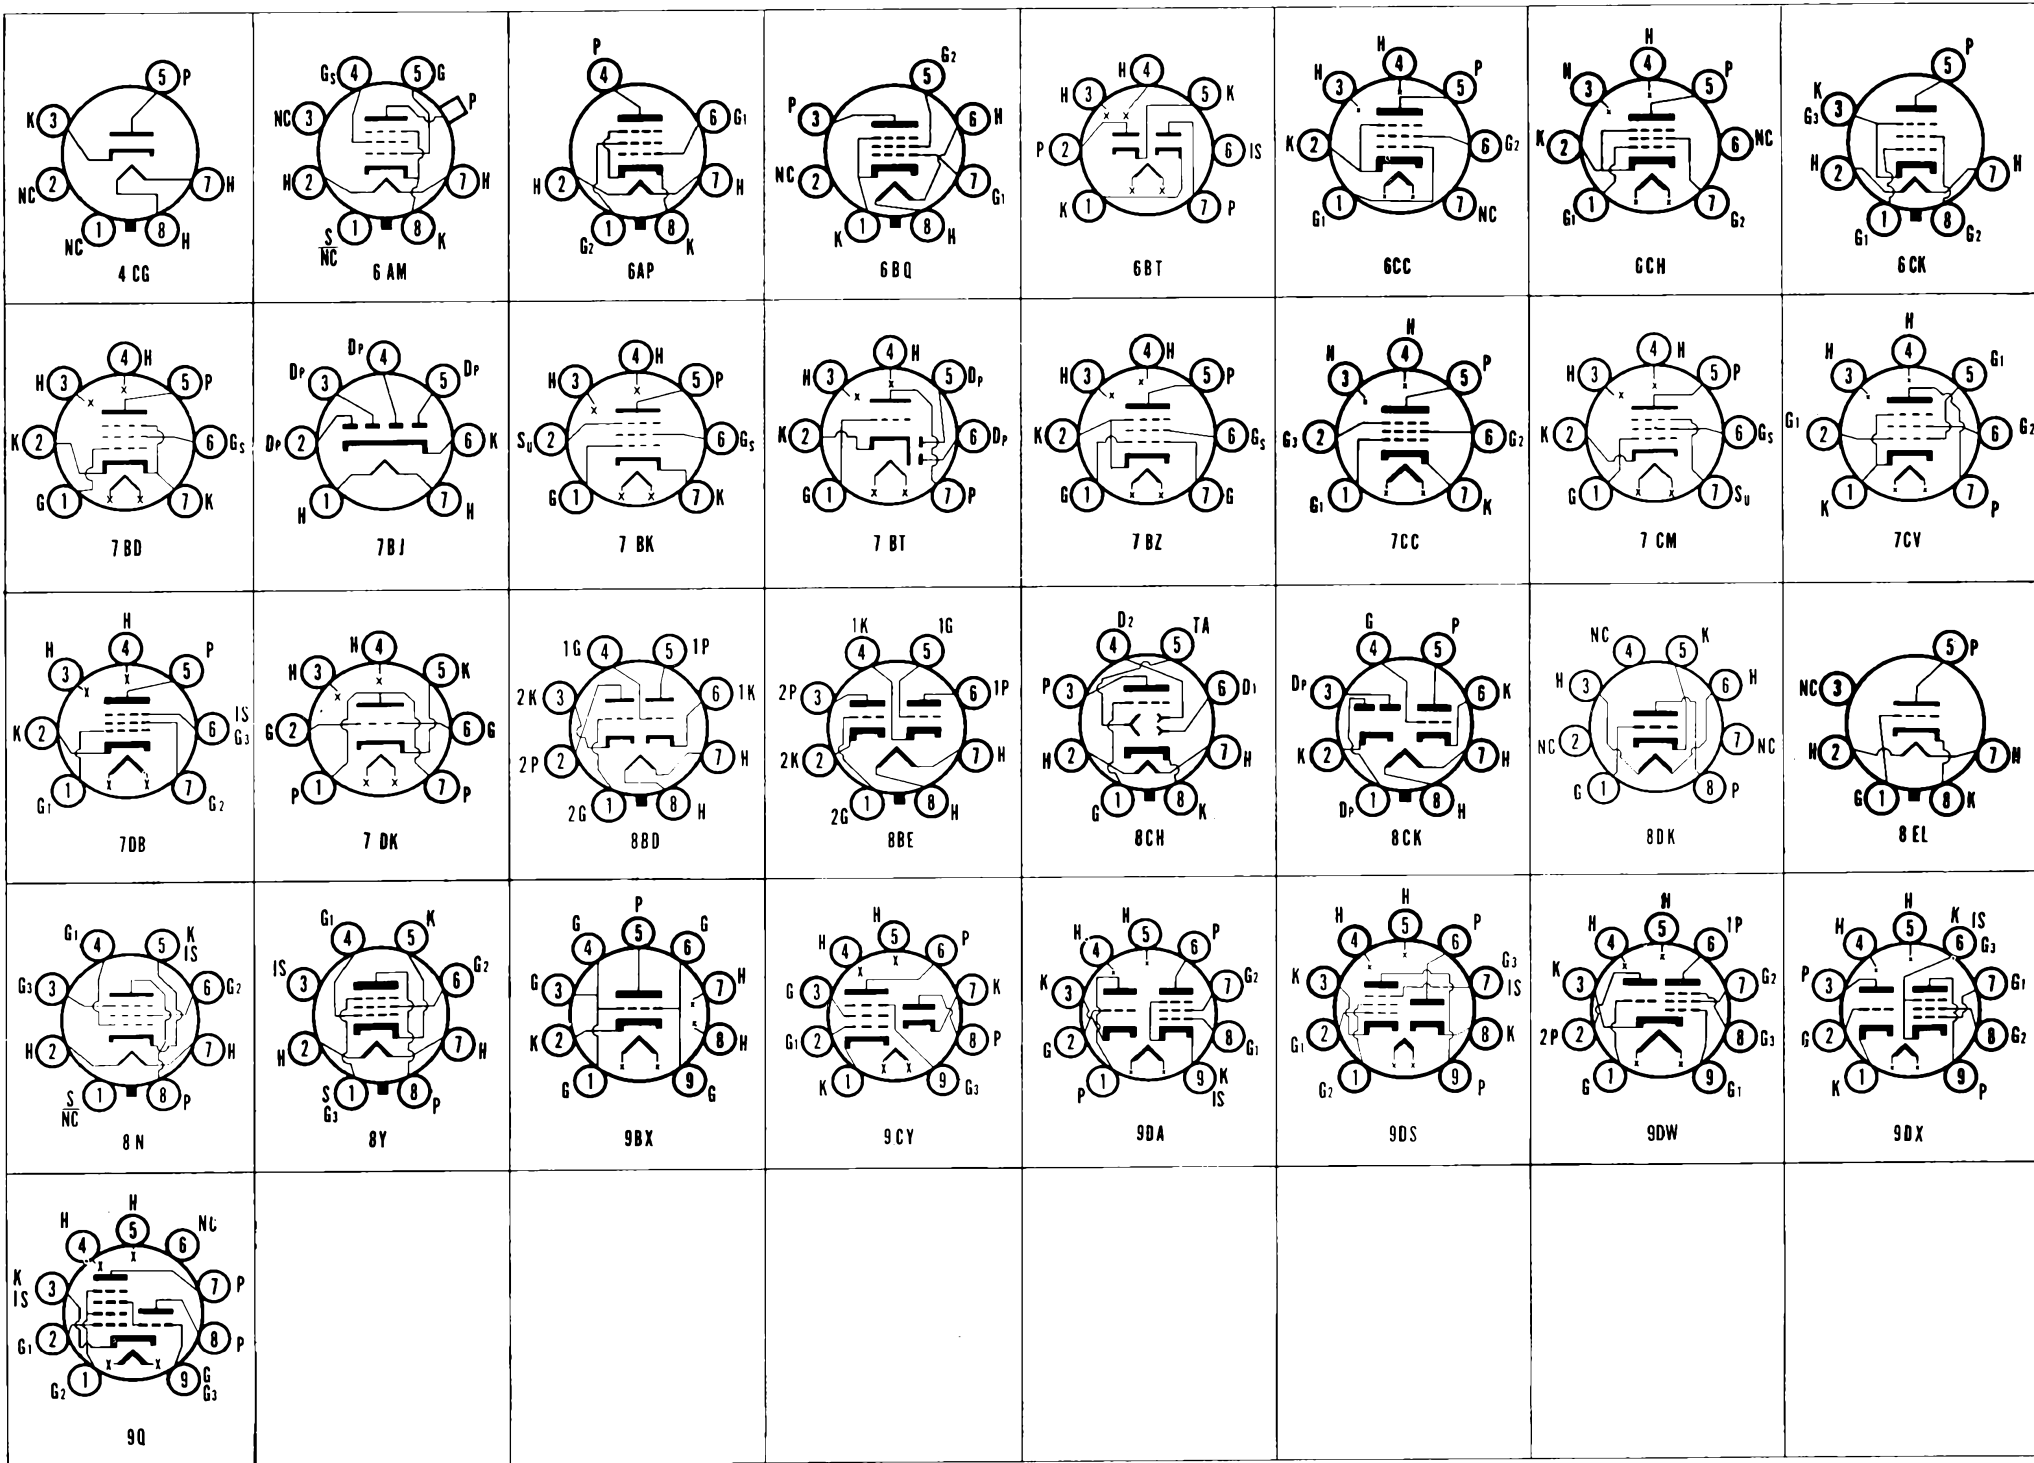

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
6AU8A	T-6½	Tri. Pentode	9DX	Cathode	6.3	0.600	2.2* .06*	2.6* 7.5*	0.34* 3.4*	Tri. Amp. Pent. Amp.	150 200	150 ^m 82 ^m 125	9.5 17 3.4	8,100 100,000	5,300 8,000	40	6AU8A	
											Instantaneous Plate Knee Values for 6AU8A: EB = 40 Volt, EC ₂ = 125 Volt, EC ₁ = 0. IB = 28 Ma., IC ₂ = 10 Ma.											
6AV5GT	T-9	Beam Pent.	6CK-0-0	Cathode	6.3	1.200	Horiz. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 5,500 Volts. Maximum D-C Plate Current = 110 Ma. Maximum Plate Dissipation = 11 Watts. Maximum Screen Dissipation = 9.5 Watts.										6AV5GT	
6AV5GA	T-11 or T-12	Beam Pentode	6CK-0-0	Cathode	6.3	1.200	0.5*	14.0*	7.0*	Horizontal Def. Amp.	60 250	0 22.5	150 150	225 55	25 2.1	Plate Knee Characteristics 20,000 5,500	6AV5GA	
6AV6	T-5½	Duodiode Tri.	7BT-0-0	Cathode	6.3	0.300	2.1	2.3	0.9	Det. Amp.	950 100	2.0 1.0	1.2 0.5	68,500 80,000	1,600 1,250	100 100	4.3** When Eb = 150	6AV6	
6AW7GT	T-9	Duodiode Tri.	8CQ-1-0	Cathode	6.3	0.300	Det. Amp.	100	0	1.4	1,200	80	6AW7GT	
6AW8 6AW8A	T-6½	Tri. Pentode	9DX-0-6	Cathode	6.3	0.600	2.2 .03 2.2 .03	3.4 11.0 3.4 10.0	1.7 3.6 1.7 4.5	Tri. Amp. Pent. Amp.	200 200	2.0 180 ^m 150	4.0 13.0 3.5	17,500 250,000	4,000 9,000	70	6AW8 6AW8A	
											6AW8 and 6AW8A are Similar Except for Plate Knee Characteristics of 6AW8A. Instantaneous Plate Knee Values for 6AW8A. EB = 65 Volt, EC ₂ = 150 Volt, EC ₁ = 0. IB = 42 Ma., IC ₂ = 12.5 Ma.											
6AX4GT	T-9	Diode	4CG	Cathode	6.3	1.200	T.V. Damper	P.I.V. = 4,400 Volts Max., D-C Plate Current = 125 Ma. Max.										6AX4GT	
6AX5GT	T-9	Duodiode	6S-0-0	Cathode	6.3	1.200	F-W Rect.	350 A.C. Volts Per Plate, R.M.S., 125 Ma. D.C. Output. Condenser Input to Filter. 450 A.C. Volts Per Plate, R.M.S., 125 Ma. D.C. Output. Choke Input to Filter.										6AX5GT	
6AX6G	ST-14	Duodiode	7Q-0-0	Cathode	6.3	2.500	F-W Rect.	350 A.C. Volts Per Plate, R.M.S., 250 Ma. Output. Condenser Input to Filter.										6AX6G	
6AX7	T-6½	Duotriode	9A-0-0	Cathode	6.3/3.15	0.300/0.600	1.7* 1.7*	1.6* 1.6*	0.46* 0.34*	Amplifier	Characteristics Same as Type 12AX7. (6AX7 Designed for Series String TV Receivers).										6AX7	
6AX8	T-6½	Tri. Pentode	9AE-0-7	Cathode	6.3	0.450	1.8 .006m	2.5 5.0	1.0 3.5	Sync. Sep. Video Amp.	150 250	56 ^m 120 ^m 110	18 10 3.5	5,000 400,000	8,500 4,800	40	6AX8	
6AZ5	T-3	Duodiode	8DF-0-4	Cathode	6.3	0.150	Rectifier	Plate Supply Voltage = 50 Volts, RMS, Each Plate. DC Output Current = 4 Ma. Each Plate. Capacitor Input to Filter.										6AZ5	
6AZ8	T-6½	Tri. Pentode	9ED-0-5	Cathode	6.3	0.450	1.7* .02*	2.0* 6.5*	1.7* 2.2*	Sync. Sep. Video Amp.	200 200	6 180 ^m 150	13.0 9.5 3.0	5,750 300,000	3,300 6,000	19	6AZ8	
6B3	T-6½	Diode	9BD-0-0	Cathode	6.3	1.200	T.V. Damper	Maximum Peak Inverse Plate Voltage = 4,400 Volts. Maximum D.C. Plate Current = 150 Ma.										6B3	
6B4G	ST-16	Triode	5S-0-0	Filament	6.3	1.000	16.0	7.0	5.0	Power Amp.	Characteristics Same as Type 6A3.										6B4G	
6B5	ST-14	Duotriode	6AS-0-0	Cathode	6.3	0.800	Power Amp.	Characteristics Same as Type 6N6G.										6B5	
6B6G	ST-12	Duodiode Tri.	7V-0-0	Cathode	6.3	0.300	1.7	1.7	3.8	Det. Amp.	250	2.0	0.9	91,000	1,100	100	6B6G	
6B7 6B7S	ST-12	Duodi. Pent.	7D-0-6 7D-6-6	Cathode	6.3	0.300	.007	3.5*	9.5	R-F or I-F Det. Amp. A-F Amp.	100 180 250 250	3.0 3.0 3.0 4.5	100 75.0 100 50.0	5.8 3.4 6.0 0.65	1.7 0.9 1.5	300,000 1 Meg. 800,000	950 840 1,000	6B7 6B7S	
6B8	Metal	Duodi. Pent.	8E-1-1	Cathode	6.3	0.300	.005m	6.0	9.0	Det. Amp.	Characteristics Same as Type 6B7, Except Capacitances.										6B8	
6B8G 6B8GT	ST-12 T-9	Duodi. Pent.	8E-0-8 8E-1-8	Cathode	6.3	0.300	.01m	3.6	9.5	Det. Amp.	Characteristics Same as Type 6B7.										6B8G 6B8GT	
6BA5	T-3	Pentode	8DY-0-0	Cathode	6.3	0.150	.065	3.4	3.6	A-F Amp.	100	270 ^m	100	5.5	2.0	175,000	2,150	6BA5	
6BA6	T-5½	Pentode	7BK-0-2	Cathode	6.3	0.300	.0035m*	5.5*	5.0*	R-F Amp.	100 250	68 ^m 68 ^m	100 100	10.8 11.0	4.4 4.2	250,000 1.0 Meg. †	4,300 4,400	6BA6	
6BA7	T-6½	Heptode	8CT-0-6&8	Cathode	6.3	0.300	0.19m	9.5	8.3	Converter	100 250	1.0 1.0	100 100	3.6 3.8	10.2 10.0	500,000 1 Meg.	900 Δ 950 Δ	6BA7	
6BA8 6BA8A	T-6½	Tri. Pentode	9DX-0-6	Cathode	6.3	0.600	2.2 .03 2.2 .03	2.7 11.0 2.7 10.0	2.2 3.6 1.9 4.5	Tri. Amp. Pent. Amp.	200 200	8.0 180 ^m 150	8.0 13.0 3.5	6,700 400,000	2,700 9,000	18	6BA8 6BA8A	
											6BA8 and 6BA8A are Similar Except for Plate Knee Characteristics of 6BA8A. Instantaneous Plate Knee Values for 6BA8A EB = 65 Volt, EC ₂ = 150 Volt, EC ₁ = 0. IB = 42 Ma., IC ₂ = 12.5 Ma.											
6BC5	T-5½	Pentode	7BD-0-2&7	Cathode	6.3	0.300	.02	6.6	2.6	Tri. Amp. Pent. Amp.	250 180 100 125 250	890 ^m 330 ^m 180 ^m 100 ^m 180 ^m 100 125 150	6.0 8.0 4.7 8.0 7.5 1.4 2.4 2.1	9,000 Δ 6,000 Δ 600,000 Δ 500,000 Δ 800,000 Δ	4,400 6,000 4,900 6,100 5,700	40 42	6BC5	
6BC7	T-6½	Triple Diode	9AX-0-3	Cathode	6.3	0.450	F. M. Det.	High Perveance Diode										6BC7	
6BC8	T-6½	Duotriode	9AJ-0-9	Cathode	6.3	0.400	1.4	2.5	1.3	Class A1 Amplifier #	150	220 ^m	10.0	6,200	35	6BC8	
6BD4	T-12	Beam Triode	8FU	Cathode	6.3	0.600	1.0*	3.8*	0.04m*	Hi-Volt. Reg.	20,000 Max. D.C. Plate Volts. 125 Max. D.C. Grid Volts. 1.5 Ma. Max. D.C. Plate Current.										6BD4	
6BD4A	T-12	Beam Triode	8FU-0-0	Cathode	6.3	0.600	1.0*	3.8*	0.04m*	Hi-Volt. Reg.	27,000 Max. D.C. Plate Volts. 125 Max. D.C. Grid Volts. 1.5 Ma. Max. D.C. Plate Current.										6BD4A	
6BD5GT	T-9	Beam Pent.	6CK-0-0	Cathode	6.3	0.900	Horiz. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 4,000 Volts. Maximum D-C Cathode Current = 100 Ma. Maximum Plate Dissipation = 10 Watts. Maximum Screen Dissipation = 3.0 Watts.										6BD5GT	
6BD6	T-5½	Pentode	7BK-0-2	Cathode	6.3	0.300	.004	4.3	5.0	R-F Amp.	250 100	3.0 1.0	100 100	9.0 13	3.5 5.0	700,000 120,000	2,000 2,350	6BD6	
6BD7	T-6½	Duodiode Tri.	9Z-0-7	Cathode	6.3	0.230	1.3	2.4	1.3	Det. Amp.	250	3	1.0	58,000	1,200	70	6BD7	
6BE6	T-5½	Heptode	7CH-0-0	Cathode	6.3	0.300	0.3*	7.0*	8.0*	Converter	100 250	1.5 1.5	100 100	2.6 2.9	7.0 6.8	400,000 Δ 1.0 Meg. †	455 Δ 475 Δ	(Osc. Grid Res. = 20,000 Ohms) (Osc. Grid Current 0.5 Ma.)		6BE6
6BE8 6BE8A	T-6½	Tri. Pentode	9EG	Cathode	6.3 6.3	0.450 0.450	1.8* .04*	2.8* 4.4*	1.5* 2.6*	VHF Osc. VHF Amp.	150 250	56 ^m 68 ^m 110	18.0 10.0 3.5	5,000 400,000	8,500 5,200	40	6BE8 6BE8A	

6BF5	T-5½	Pentode	7BZ	Cathode	6.3	1.200	0.65*	14*	6.0*	S.T. A1 Amp.	110	7.5	110	36	4	12,000	7,500	2,500	1,900	6BF5	
6BF6	T-5½	Duodiode Tri.	7BT-0-0	Cathode	6.3	0.300	1.9	1.9	1.2	Det. Amp.	250	9.0	9.5	8,500	1,900	16	10,000	300	6BF6
6BF7	T-3	Duotriode	8DG-0-0	Cathode	6.3	0.300	1.5	2.0	1.6	R-F Amp.#	100	100*	8.0	7,000*	4,800	35	6BF7
6BF7A	T-3	Duotriode	8DG-0-0	Cathode	6.3	0.300	1.5	2.0	1.6	R-F Amp.#	100	100*	8.0	7,300*	4,800	35	Cout Sec. 1 = 1.6 μμt.		6BF7A
6BF7W (3)	T-3	Duotriode	8DG-0-0	Cathode	6.3	0.300	1.5	2.0	1.6	R-F Amp.	Ruggedized Version of Type 6BF7.										6BF7W (3)
6BG6G 6BG6GA	ST-16 T-12	Beam Pent.	5BT-0-0	Cathode	6.3	0.900	0.34m* 0.8*	12.0* 11.0*	6.5* 6.0*	Horiz. Defl. Amp.	Max. Peak Positive Plate Voltage = 6,600 Volts. Max. D.C. Cathode Current = 110 Ma. Max. Plate Dissipation = 20 Watts. Max. Screen Dissipation = 3.2 Watts.										6BG6G 6BG6GA


(1) Values are given shielded unless marked with (*). (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (3) Has special mechanical and/or life characteristics. (4) Average Contact potential bias developed across specified grid resistor. X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
 * Plate and Target Supply Voltage.
 † Maximum Signal.

□ Applied through 20,000 ohms.
 ▲ Conversion Transconductance.
 ** Triode Operation.

¶ Plate to Plate.
 ♦ Approximate.

m maximum.
 ■ Cathode Resistor (ohms).

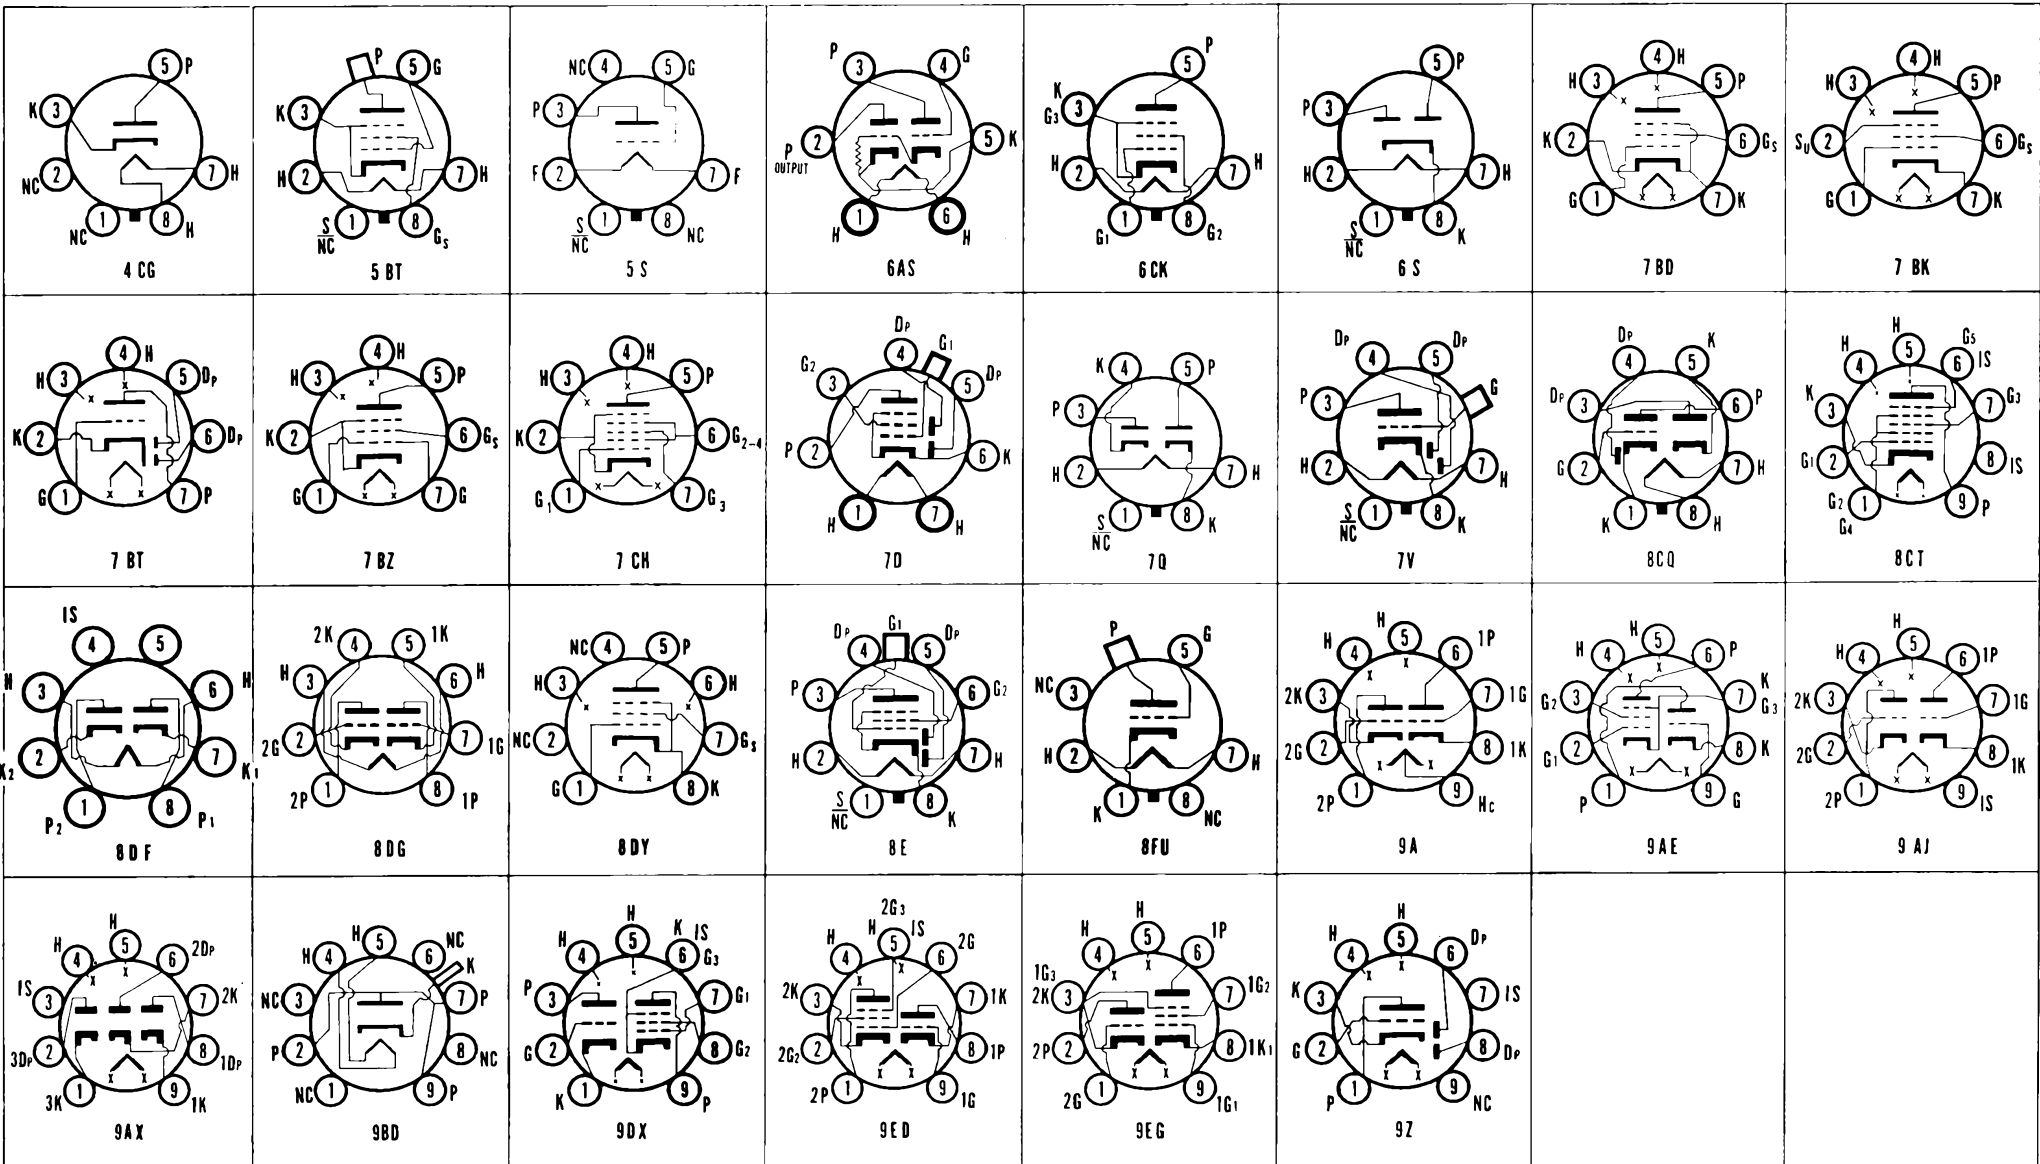


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\mu\text{f}$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milli-watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout.													
6BG7	T-3	Duotriode	8DG-0-0	Cathode	6.3	0.300	1.5 1.5	2.0 2.0	1.6 2.0	R-F Amp. # R-F Amp.	100 100	100 [■] 100 [■]	8.0 8.0	7,000 [†] 7,000 [†]	4,800 4,800	35 35	6BG7	
6BH6	T-5½	Pentode	7CM-0-7	Cathode	6.3	0.150	.0035m*	5.4*	4.4*	R-F Amp.	100 250	1.0 1.0	100 150	3.6 7.4	1.4 2.9	0.7 Meg. † 1.4 Meg. †	3,400 4,600	6BH6		
6BH8	T-6½	Tri. Pentode	9DX-0-6	Cathode	6.3I	0.600	2.4* .046*	2.6* 7.0*	3.8* 2.4*	Tri. Amp. Pent. Amp.	150 200	5 82 [■] 125	9.5 15.0 3.4	5,150 150,000	3,300 7,000	17	6BH8	
(6BH8 Designed for Series String TV Receivers).																						
6BJ5	T-5½	Pentode	6CH	Cathode	6.3	0.640	Power Amp.	250	5.0	250	3.5	5.5	40,000	10,500	450	7,000	4,000	6BJ5	
6BJ6	T-5½	Pentode	7CM-0-7	Cathode	6.3	0.150	.0035m*	4.5*	5.0*	R-F Amp.	250 100	1.0 1.0	100 100	9.2 9.0	3.3 3.5	1.3 Meg. 250,000	3,600 3,650	6BJ6		
6BJ7	T-6½	Triple Diode	9AX-0-3	Cathode	6.3	0.450	TV DC Rest'r	Each Section Similar to Each Section of a 6AL5.										6BJ7	
6BJ8	T-6½	Duodiode Tri.	9ER-0-0	Cathode	6.3I	0.600	2.6*	2.8*	0.31*	Class A1 Amplifier	90 250	0	13.5 8.0	4,700 7,150	4,700 2,800	22 20	6BJ8	
(6BJ8 Designed for Series String TV Receivers).																						
6BK4	T-12	Beam Triode	8GC-0-0	Cathode	6.3	0.200	.03*	2.6*	1.0*	Hi-Volt. Reg.	25000 Max. D.C. Plate Volts. 125 D.C. Grid Volts. 1.5 Ma. Max. D.C. Plate Current.										6BK4	
6BK5	T-6½	Beam Pent.	9BQ-0-0	Cathode	6.3	1.200	0.6*	13.0*	5.0*	Power Amp.	250	5.0	250	35	3.5	0.1 Meg. †	8,500	6,500	3,500	6BK5	
6BK6	T-5½	Duodiode Tri.	7BT-0-2	Cathode	6.3	0.300	Det. Amp.	100 250	1.0 2.0	0.5 1.2	80,000 62,500	1,250 1,600	100 100	6BK6	
6BK7	T-6½	Duotriode	9AJ-0-9	Cathode	6.3	0.450	1.9 1.9	3.0 3.0	1.1 1.0	VHF Amp.	100 150	120 [■] 56	9.0 18	6,100 4,700	6,100 8,500	37 40	6BK7	
6BK7A 6BK7B	T-6½	Duotriode	9AJ-0-9	Cathode	6.3 6.3I	0.450 0.450	1.8* 1.8*	3.0* 3.0*	1.0* 0.9*	VHF Amp.	150	56 [■]	18.0	4,600	9,300	43	6BK7A 6BK7B	
6BL4	T-12	Diode	8GB-0-0	Cathode	6.3	3.000	T.V. Damper	P.I.V. = 4,500 Volts Abs. Max. D.C. Plate Current = 200 Ma. Max.										6BL4	
6BL7GT 6L7GTA	T-9	Duotriode	8BD	Cathode	6.3	1.500	6.0* 6.0*	4.2* 4.6*	0.9* 0.9*	Vert. Osc. Vert. Defl. Amp. #	Maximum Peak Positive Pulse Plate Voltage = 2,000 Volts. Maximum D.C. Cathode Current = 60 Ma. Maximum Plate Dissipation = 10 Watts. 250 9 40 2,150 7,000 15 6BL7GT and 6BL7GTA are Similar Except for Plate Knee Characteristics of 6BL7GTA. Instantaneous Plate Knee Values for 6BL7GTA: EB = 150, EC = 0, IB = 65 Ma.										6BL7GT 6BL7GTA	
6BL8	T-6½	Tri. Pentode	9DC-0-7	Cathode	6.3	0.450	.025* 1.5*	5.5* 2.5*	3.8* 1.8*	VHF Osc. VHF Amp.	100 170	2.0 2.0	170	14.0 10.0	2.8	400,000	5,000 6,200	27 40	6BL8	
6BM8	T-6½	Tri. Pentode	9EX-0-2	Cathode	6.3	0.780	4.0* 0.3*	2.7* 9.3*	4.0* 8.0*	Pent. Vert. Defl. Amp. Tri. Vert. Osc.	Maximum Peak Positive Pulse Plate Voltage = 2,500 Volts. Maximum D.C. Cathode Current = 50 Ma. Maximum Plate Dissipation = 7 Watts. 200 16.0 200 35.0 7.0 20,000 6,400 9.5 100 0 200 3.5 2,500 70										6BM8	
6BN4	T-5½	Triode	7EG	Cathode	6.3	0.200	1.2	3.2	1.4	VHF Amp.	150	220 [■]	9.0	6,300	6,800	43	6BN4	
6BN6	T-5½	Gated Beam	7DF-0-1	Cathode	6.3	0.300	Quad. F. M. Det.	65	1.3 †	60	0.23	5.0	Grid No. 1 Signal Voltage (RMS) = 30 Volts. Grid No. 3 Signal Voltage (RMS) = 4 Volts.				6BN6		
6BN7	T-6½	Duotriode	9AJ-0-0	Cathode	6.3	0.750	0.7 3.0	1.4 5.5	0.3 1.6	Oscillator Amplifier	120 250	1.0 15.0	5.0 24.	14,000 2,900	2,000 5,500	28 12	6BN7	
6BN8	T-6½	Duodiode Tri.	9ER	Cathode	6.3I	0.600	2.5*	3.6*	0.25*	Class A1 Amp	100 250	1 3	1.5 1.6	21,000 28,000	3,500 2,500	75 70	6BN8	
(6BN8 Designed for Series String Receivers).																						
6BQ5	T-6½	Beam Pent.	9CV	Cathode	6.3	0.760	0.5m*	10.8*	6.5*	Power Amp.	Characteristics Same as Type EL84.										6BQ5	
6BQ6G 6BQ6GA 6BQ6GTA 6BQ6GTB 6BQ6GT	ST-12 T-11 T-9 T-9	Beam Pent.	6AM-0-0	Cathode	6.3	1.200	0.6*	15.0*	7.0*	Horiz. Defl. Amp.	6,000 Max. Peak Pos. Plate Volts. 110 Ma. Max. Cathode Current. 11 Watts Max. Plate Dissipation. 250 22.5 150 57 2.1 14,500 5,900										6BQ6G 6BQ6GA 6BQ6GTA	
6BQ6GT	T-9	Beam Pent.	6AM-0-0	Cathode	6.3	1.200	0.6*	15.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6BQ6G. Dissipation Ratings Same as Type 6BQ6G. Maximum Peak Positive Plate Voltage = 5,500 Volts. Maximum D.C. Cathode Current = 110 Ma.										6BQ6GT	
6BQ7	T-6½	Duotriode	9AJ-0-9	Cathode	6.3	0.400	1.15	2.55	1.30	VHF Amp.	150	220 [■]	9.	5,800	6,000	35	6BQ7	
6BQ7A	T-6½	Duotriode	9AJ	Cathode	6.3	0.400	1.2	2.6	1.2	VHF Amp.	150	220 [■]	9	5,800	6,000	38	6BQ7A	
6BR8	T-6½	Triode Pentode	9FA	Cathode	6.3	0.450	1.8 .008	2.5 5.0	1.0 3.5	Oscillator Mixer	150 250	56 [■] 68 [■] 110	18 10 3.5	5,000 400,000	8,500 5,200	40	6BR8	
6BR8A	T-6½	Tri. Pentode	9FA	Cathode	6.3I	0.450	1.8 .008	2.5 5.0	1.0 3.5	VHF Osc. VHF Amp.	Characteristics Same as Type 6BR8. (6BR8A Designed for Series String Receivers).										6BR8A	
6BS8	T-6½	Duotriode	9AJ	Cathode	6.3	0.400	1.15	2.6	1.2	VHF Amp.	150	220 [■]	10	5,000	7,200	36	6BS8	
6BT6	T-5½	Duodiode Tri.	7BT-0-2	Cathode	6.3	0.300	Det. Amp.	100 250	1.0 3.0	0.8 1.0	54,000 58,000	1,300 1,200	70 70	6BT6	
6BT8	T-6½	Duodi. Pent.	9FE	Cathode	6.3	0.450	.04m*	7.0*	2.3*	Amp. Det.	200	180 [■]	150	9.5 8.0 with 10 Volts D.C. Each Unit.	2.8	300,000	6,200	6BT8	
6BU4	T-12	Triode	8GC	Cathode	6.3	0.450	.03*	2.0*	8.0*	H.V. Reg.	25,000	8.4	1.0	8.2 Meg. †	185	1,515	6BU4	
6BU6	T-5½	Duodiode Tri.	7BT-0-2	Cathode	6.3	0.300	Det. Amp.	100 250	3.0 9.0	3.9 9.5	11,000 8,500	1,500 1,900	16.5 16.0 10,000 300	6BU6	
6BU8	T-6½	Duo Pentode	9FG-0-2	Cathode	6.3	0.300	G3 to P 1.9	6.0	3.0	Sync. Sep.	100 100	0 Grid 1 67.5 67.5 2.2	180 Gr. 3 1500 Gr. 1	Grid #3 Volts = -4.5 Grid #1 Volts = -2.3	6BU8
6BV8	T-6½	Duodiode Tri.	9FJ-0-0	Cathode	6.3I	0.600	2.0*	3.6*	0.4*	Det. Amp.	200	330 [■]	11.0	5,900	5,600	33	6BV8	
6BW4	T-6½	Duodiode	9DJ	Cathode	6.3	0.900	F-W Rect.	325 A.C. Volts Per Plate, RMS, 100 Ma. Output Current. Capacitor Input to Filter. 450 A.C. Volts Per Plate, RMS, 100 Ma. Output Current. Choke Input to Filter.										6BW4	

6BW8	T-6½	Duodi. Pent.	9HK	Cathode	6.3I	0.450	.02m*	4.8*	2.6*	R-F or I-F Amplifier	250	68 ^m	110	10.0	3.5	250,000	5,200	6BW8
6BX7GT	T-9	Duotriode	8BD	Cathode	6.3	1.500	4.2 4.0	5.0 5.0	3.4 3.2	Vert. Amp. Vert. Osc.	Maximum Peak Positive Pulse Plate Volts = 2,000 Volts. Maximum D.C. Cathode Current = 60 Ma.										6BX7GT
6BX8	T-6½	Duotriode	9AJ	Cathode	6.3	0.400	1.4 1.4	4.9 2.4	2.6 1.25	VHF Amp.	65	1.0	9	1,300	7,600	10	6BX8
6BY5G	ST-14	Duodiode	6CN-0-0	Cathode	6.3	1.600	F-W Rect.	375 A.C. Volts Per Plate, R.M.S., 175 Ma. D.C. Output Current. Condenser Input to Filter.										6BY5G
6BY5GA	T-12	Duodiode	6CN-0-0	Cathode	6.3	1.600	T.V. Damp	P.I.V. = 3,000 Volts Abs. Max. D.C. Plate Current = 175 Ma. Max. Each Plate.										6BY5GA
6BY6	T-5½	Heptode	7CH-0-0	Cathode	6.3	0.300	.08m*	5.4*	7.6*	Sync. Separator	10	G1&2=0	25	1.4	3.5	Plate Current = 50μ Amps. When Grid 3 Voltage = 2.5					6BY6

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. # Per Tube or Section. □ Applied through 20,000 ohms. † Plate to Plate.
(2) Converter tube capacitances given are signal (4) Average Contact potential bias developed across specified grid resistor. ‡ Maximum Signal. § Plate and Target Supply Voltage. † Conversion Transconductance. ‡ Approximate.
I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.) * m maximum. † Cathode Resistor (ohms). ** Triode Operation.

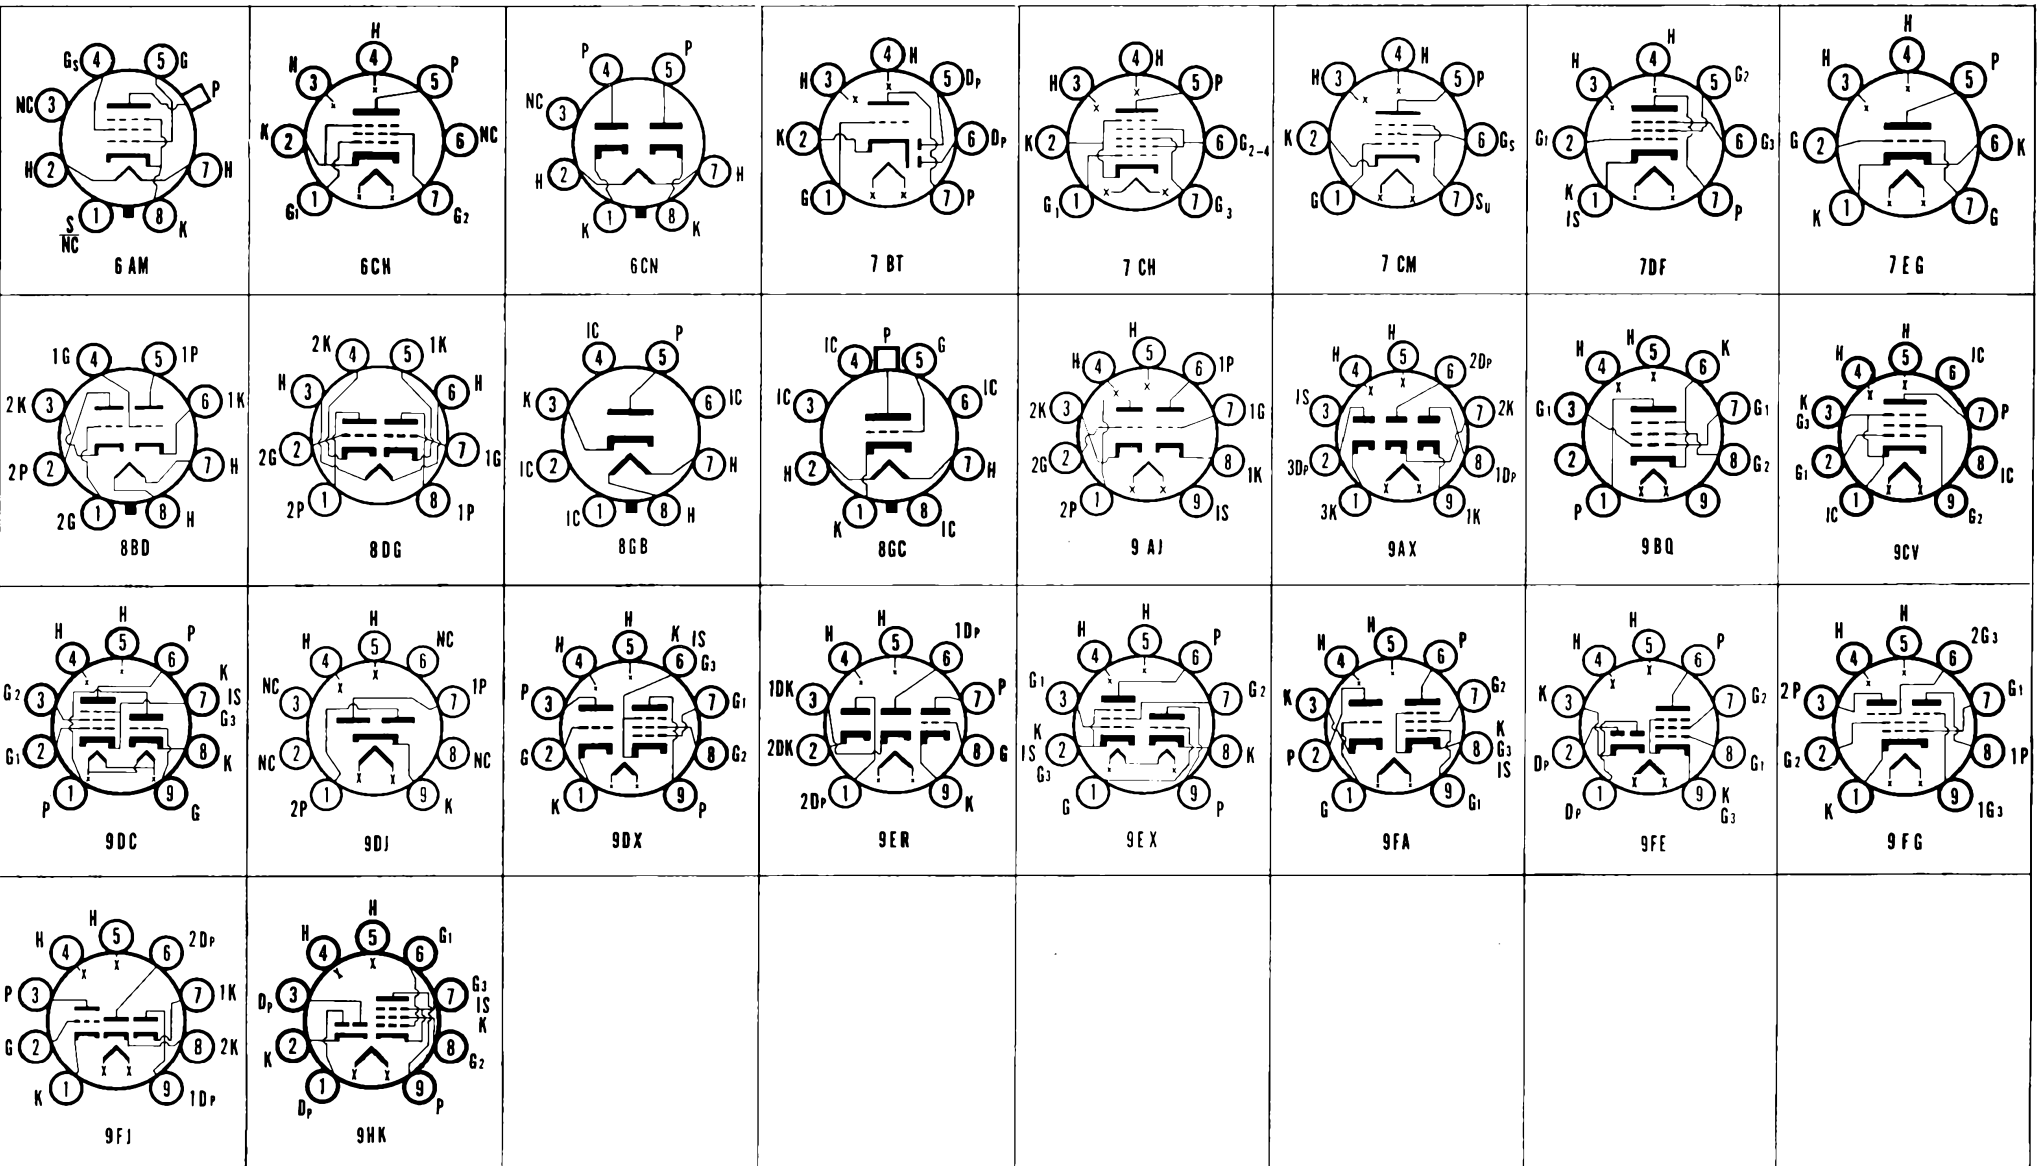

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.


SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Stated Power Output	Power Output Milli- watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
6BY8	T-6½	Diode Pent.	9FN	Cathode	6.3I	0.600	.0035*	5.5*	5.0*	Det. Amp.	100 250	150 68	100 150	5.0 10.6	2.1 4.3	500,000 1.0 Meg.	3,900 5,200	6BY8	
6BZ6	T-5½	Pentode	7CM-0-7	Cathode	6.3	0.300	.015m	7.5	2.8	R-F Amp.	200	180	150	11.0	2.6	0.6 Meg. †	6,100	Semi-Remote Cutoff.	6BZ6	
6BZ7	T-6½	Duotriode	9AJ-0-9	Cathode	6.3	0.400	2.6	1.2	VHF Amp.	150	220	10	5,300	6,800	36	6BZ7		
6BZ8	T-6½	Triode	9AJ-0-9	Cathode	6.3	0.400	1.15* 1.15*	2.5* 4.95*	1.35* 3.27*	VHF Amp.	125	100	10	5,600	8,000	45	6BZ8		
6C4	T-5½	Triode	6BG-0-0	Cathode	6.3	0.150	1.4	1.8	2.5	R-F Osc. R-F Amp.	300 250 100	27 8.5 0	25 10.5 11.8 7,700 6,250 2,200 3,100 17 19.5	Class C	5,500	6C4
6C5 6C5GT	Metal T-9	Triode	6Q-1-1	Cathode	6.3	0.300	2.0 2.2	3.0 4.8	11.0 12.0	Amplifier	250	8.0	8.0	10,000	2,000	20	6C5 6C5GT	
6C6	ST-12	Pentode	6F-0-5	Cathode	6.3	0.300	.007m*	5.0*	6.5*	Amplifier	100 250	3.0 3.0	100 100	2.0 2.0	0.5 0.5	1 Meg. 1 Meg. >	1,185 1,225	6C6	
6C7	ST-12	Duodiode Tri.	7G-3-6	Cathode	6.3	0.300	Det. Amp.	250	9.0	4.5	16,000	1,250	20	6C7	
6C8G	ST-12	Duotriode	8G-0-0	Cathode	6.3	0.300	2.6 1.8	2.6 1.3	2.0 2.2	Amplifier Inverter	250 250	4.5 3.0	3.2	22,500	1,600	36	(One Section)	6C8G	
6CA4	T-6½	Duodiode	9M-0-0	Cathode	6.3	1.000	F-W Rect.	350 A.C. Volts Per Plate, RMS, 150 Ma. Output Current.										6CA4	
6CA5	T-5½	Beam Pent.	7CV-0-0	Cathode	6.3	1.200	0.5*	15.0*	9.0*	Power Amp.	110 125	4.0 4.5	110 125	32 37	3.5 4.0	16,000 15,000	8,100 9,200	3,500 4,500	1,100 1,500	6CA5	
6CA7	T-10 (SP)	Beam Pent.	8ET	Cathode	6.3	1.500	1.0*	15.5*	7.2*	Power Amp.	Characteristics Same as Type EL34.										6CA7	
6CB5	ST-16	Beam Pent.	8GD-0-0	Cathode	6.3	2.500	0.8*	24.0*	10.0*	Horiz. Defl. Amp.	175	6,800 30	Max. Peak Pos. Pulse Plate Volts. 175	90	23 Watts Max. Plate Dissipation. 6.0	5,000	8,800	3.6 Watts Max. Screen Dissipation.	6CB5	
6CB5A 6CB6 6CB6A	T-12 T-5½	Pentode	7CM-0-7	Cathode	6.3 6.3I	0.300 0.300	0.4* .02*	22.0* 6.3*	10.0* 1.9*	VHF Amp.	200	180	150	9.5	2.8	600,000 †	6,200	6CB5A 6CB6 6CB6A		
6CD6G	ST-16	Beam Pent.	5BT-0-0	Cathode	6.3	2.500	0.8*	24*	9.5*	Horiz. Defl. Amp.	Maximum Peak Positive Plate Voltage = 6,600 Volts. Maximum D.C. Plate Current = 200 Ma. Maximum Plate Dissipation = 3 Watts.										6CD6G	
6CD6GA	T-12	Beam Pent.	5BT-0-0	Cathode	6.3	2.500	1.1*	22.0*	8.5*	Horiz. Defl. Amp.	7,000 Max. Peak Pos. Pulse Plate Volts. 200 Ma. Max. Cathode Current. 20 Watts Max. Plate Dissipation. 3.0 Watts Max. Screen Dissipation.										6CD6GA	
6CE5	T-5½	Pentode	7BD	Cathode	6.3	0.300	.03*	6.5*	1.9*	VHF Amp.	125	1.0	125	111	3.7	1.0 Meg. †	7,600	6CE5		
6CF6	T-5½	Pentode	7CM	Cathode	6.3	0.300	.015*	6.5*	3.0*	Amplifier	125	56	125	12.5	3.7	0.3 Meg.	7,800	6CF6		
6CG6	T-5½	Pentode	7BK-0-2	Cathode	6.3	0.300	.008m	5.0	5.0	R-F Amp.	250	8.0	150	9.	2.3	720,000	2,000	6CG6		
6CG7	T-6½	Duotriode	9AJ-0-9	Cathode	6.3I	0.600	4.0*	2.3*	2.2*	Amplifier	Characteristics Same as Type 6SN7GT. (6CG7 Designed for Series String TV Receivers).										6CG7	
6CG8 6CG8A	T-6½	Tri. Pentode	9GF	Cathode	6.3 6.3I	0.450 0.450	1.5 .02	2.4 4.3	1.0 1.6	Osc. Mixer	125 125	1.0 1.0	125 125	12 9.	2.2	6,000 .3 Meg.	6,500 5,500	40	6CG8 6CG8A		
6CH7	T-6½	Duotriode	9FC-0-2	Cathode	6.3	0.400	1.1	2.4	0.8	Amplifier	150	220	10	5,300	6,800	36	6CH7		
6CH8	T-6½	Tri. Pent.	9FT-0-0	Cathode	6.3	0.450	1.6* .025m*	1.9* 7.0*	1.6* 2.25*	Tri. Amp. Pent. Amp.	200 200	180	150	13.0 9.5	2.8	5,750 300,000	3,300 6,200	19	6CH8		
6CK4	T-9	Power Triode	8JB	Cathode	6.3	1.250	6.5	8.0	1.8	Vert. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 2,000 Volts. Maximum D.C. Cathode Current = 100 Ma. Maximum Plate Dissipation = 12 Watts.										6CK4	
6CL5	T-12	Beam Pent.	8GD	Cathode	6.3	2.500	0.7*	20.0*	11.5*	Horiz. Defl.	7,000 Max. Peak Pos. Pulse Plate Volts. 25 Watts Max. Plate Dissipation. 4.0 Watts Max. Screen Dissipation.										6CL5	
6CL6	T-6½	Power Pent.	9BV	Cathode	6.3	0.650	0.12	11	5.5	Video Amp.	250	3	150	30	7	0.15 Meg. †	11,000	6CL6		
6CL8	T-6½	Tri. Tetrode	9FX	Cathode	6.3I	0.450	1.8 .016m	2.7 5.0	1.2 3.0	Osc. Mixer	125 125	0 1.0 125	15 12	4.0	5,000 100,000	8,000 5,800	40	6CL8		
6CL8A	T-6½	Tri. Tetrode	9FX	Cathode	6.3I	0.450	1.8 .01	2.7 5	1.2 3.4	VHF Osc. VHF Amp.	125 125	56 1.0 125	15 12	4	5,000 100,000	8,000 6,400	40	6CL8A		
6CM5	T-9	Beam Pent.	8GT-0-1&3	Cathode	6.3	1.250	1.1*	17.5*	7.7*	Horiz. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 7,000 Volts. Maximum D.C. Cathode Current = 200 Ma. Maximum Plate Dissipation = 10 Watts.										6CM5	
6CM6	T-6½	Beam Pent.	9CK	Cathode	6.3	0.450	0.7*	8.0*	8.5*	Vert. Defl. Amp. Power Amp.	Maximum Peak Positive Pulse Plate Voltage = 2,000 Volts. Maximum D.C. Cathode Current = 40 Ma. Maximum Plate Dissipation = 8 Watts.										6CM6	
6CM7	T-6½	Duotriode	9ES	Cathode	6.3I	0.600	3.8* 3.0*	2.0* 3.5*	0.5* 0.4*	Sect. 2 Vert. Defl. Amp. Sect. 1 Vert. Osc.	Maximum Peak Positive Pulse Plate Voltage = 2,200 Volts. Maximum D.C. Cathode Current = 70 Ma. Maximum Plate Dissipation = 5 Watts.										6CM7	
6CM8	T-6½	Tri. Pentode	9FZ	Cathode	6.3I	0.450	1.9 .04m	1.6 6.0	0.22 2.6	Class A1 Amp.	250 200	2 180 150	1.8 9.5	2.8	50,000 600,000	2,000 6,200	100	6CM8		
6CN7	T-6½	Duodiode Tri.	9EN-0-3	Cathode	6.3	0.300	1.8*	1.5*	0.5*	Det. Amp.	100 250	1.0 3.0	0.8 1.0	54,000 58,000	1,300 1,200	70 70	6CN7		
6CQ8	T-6½	Tri. Tetrode	9GE	Cathode	6.3I	0.450	1.8 .015	2.7 5.0	1.2 3.3	VHF Tri. Osc. VHF Tet. Amp.	125 125	56 1.0 125	15 12	5,000 140,000	8,000 5,800	40	6CQ8		
6CR5	T-6½	Beam Pent.	9HC-0-0	Cathode	6.3	1.200	0.32*	12.9*	6.9*	Horiz. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 5,500 Volts. Maximum D.C. Cathode Current = 112.5 Ma. Maximum Plate Dissipation = 11 Watts.										6CR5	

6CR6	T-5½	Diode Pent.	7EA	Cathode	6.3	0.300	Det.-Audio Amplifier	250	2.0	100	9.5	3.0	200,000	1,950	6CR6
6CR8	T-6½	Tri. Pentode	9GJ-0-8	Cathode	6.3*	0.450	1.6*	2.0*	1.4*	Tri. Amp. Pent. Amp.	125	2.0	125	12.0	3.0	5,500	4,000	22	6CR8
6CS5	T-6½	Beam Pent.	9CK	Cathode	6.3	1.200	0.5	15.0	9.0	Power Amp. Triode Conn.	110	7.5	110	49	4.0	13,000	8,000	2,000	2,100	6CS5
6CS6	T-5½	Dual Control Heptode	7CH	Cathode	6.3	0.300	.07*	5.5*	7.5*	SYNCR. Separator	100	0 Grid 1	30	0.8	5.5	0.7 Meg.	1,500 Gr. 3	Grid #3 Volts = -1.0	6CS6
							0.36*	7.0*			100	-1 Grid 1	30	1.0	1.0 Meg.	1,100 Gr. 1	Grid #3 Volts = 0		

(1) Values are given shielded unless marked with (*). (2) Converter tube capacitances given are signal grid to plate, RF Input, Mixer Output. (3) Has special mechanical and/or life characteristics. (4) Average Contact potential bias developed across specified grid resistor. X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section. \$ Plate and Target Supply Voltage. † Maximum Signal. □ Applied through 20,000 ohms. ▲ Conversion Transconductance. ** Triode Operation. †† Plate to Plate. ‡ Approximate. m maximum. n Cathode Resistor (ohms).

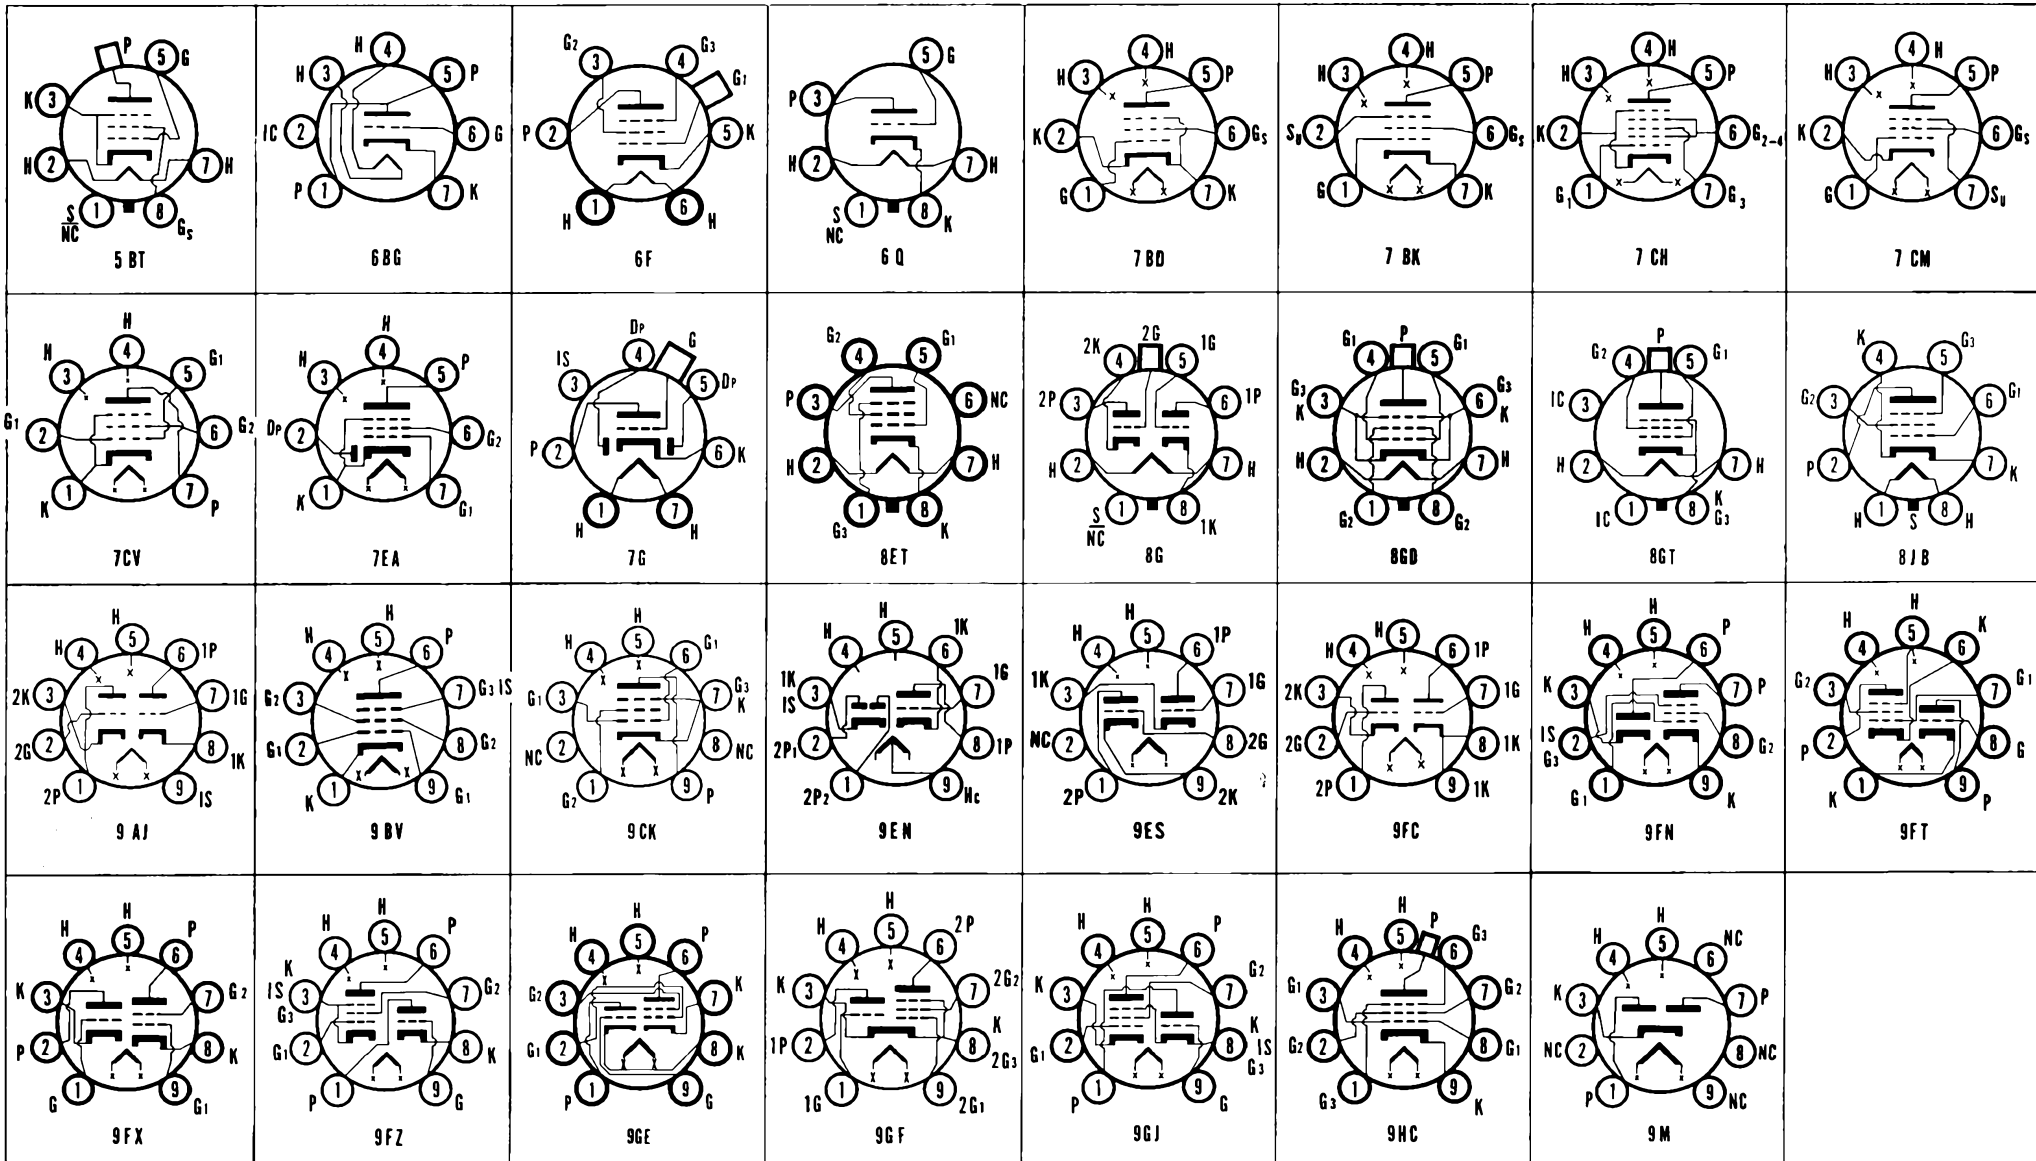

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu\text{f}$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milli-watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
6CS7	T-6½	Duotriode	9EF-0-0	Cathode	6.3I	0.600	2.6* 2.6*	1.8* 3.0*	0.5* 0.5*	Sect. 2 Vert. Defl. Amp. Sect. 1 Vert. Osc.	Maximum Peak Positive Pulse Plate Voltage = 1,500 Volts. Maximum D.C. Cathode Current = 45 Ma. Maximum Plate Dissipation = 4.5 Watts.									6CS7		
6CS8	T-6½	Tri. Pentode	9FZ-0-3	Cathode	6.3I	0.450	1.6* .02*	1.9* 6.0*	0.26* 2.8*	Tri. Amp. Pent. Amp.	125 125	2.0 56*	125	12.0 13.0	3.0	3,450 7,700	4,500 2,200	15.5 17	6CS8	
6CU5	T-5½	Pentode	7CV	Cathode	6.3	1.200	0.6*	13*	8.5*	Power Amp.	120	8	110	49	4	10,000	7,500	2,500	2,300	6CU5	
6CU6	T-12	Beam Pent.	6AM-0-0	Cathode	6.3	1.200	0.6*	15.0*	7.0*	Horiz. Amp.	Characteristics and Ratings Same as Type 6BQ6GTA.										6CU6	
6CU8	T-6½	Tri. Pentode	9GM	Cathode	6.3I	0.450	1.6* .025*	1.9* 7*	1.6* 2.4*	Tri. Amp. Pent. Amp.	200 200	6 180*	150	13 9.5	2.8	5,750 300,000	3,300 6,200	19	6CU8	
6CX7	T-6½	Duotriode	9FC-0-2	Cathode	6.3	0.400	1.2	2.4	1.3	Amplifier	150	920*	9.0	6,400	39	6CX7	
6CY5	T-5½	Tetrode	7EW-0-2,7	Cathode	6.3	0.200	.03	4.5	3.0	VHF Amp.	125	1.0	80	10.0	1.5	100,000	8,000	6CY5	
6CY7	T-6½	Duotriode	9EF	Cathode	6.3	0.750	1.8* 4.4*	1.5* 5.0*	0.3* 1.0*	Vert. Osc. Vert. Defl. A.	250 150	3 620*	1.2 30	52,000 920	1,300 5,400	68 5	6CY7	
6CZ5	T-6½	Beam Pent.	9HN	Cathode	6.3I	0.450	0.4*	6.0*	6.0*	Vert. Defl. Amp.	Maximum Peak Positive Plate Voltage = 2,200 Volts. Maximum D.C. Cathode Current = 40 Ma. Maximum Plate Dissipation = 10 Watts.									6CZ5		
6D4	T-5½	Gas Triode	5AY-0-0	Cathode	6.3	0.250	Relay Tube	350	50	Peak Cathode Current = 100 Ma. Cathode Current = 25 Ma. Approx. Volt Drop @ 25 Ma. = 16V.									6D4
6D6	ST-12	Pentode	6F-0-5	Cathode	6.3	0.300	.007m	4.7*	6.5*	Amplifier	100 250	3.0 3.0	100 100	8.0 8.2	2.0	250,000 800,000	1,500 1,600	6D6	
6D7	ST-12	Pentode	7H-5-6	Cathode	6.3	0.300	.007*	5.0*	6.5*	Amplifier	Characteristics Same as Type 6C6.										6D7	
6D8G	ST-12	Heptode	8A-0-0	Cathode	6.3	0.150	0.2	8.0	11.0	Converter	135 250	3.0 3.0	67.5 100	1.5 3.5	1.7 2.6	600,000 400,000	325▲ 550▲	(Ga = 135 V., 1.8 Ma.) (Ga = 250 V., 4.5 Ma.)		6D8G
6DA4	T-9	Diode	4CG	Cathode	6.3	1.200	T.V. Damper	Maximum Peak Inverse Plate Voltage = 4,400 Volts. Maximum D. C. Plate Current = 155 Ma.										6DA4	
6DA7	T-6½	Duotriode	9EF-0-0	Cathode	6.3	1.000	2.3* 6.9*	2.0* 5.5*	0.415* 0.82*	Sect. 2 Vert. Defl. Amp. Sect. 1 Vert. Osc.	150 250	17.5 8.0	40.0 9.0	1,100 7,700	5,700 2,600	6.3 20	6DA7
6DB5	T-6½	Beam Pent.	9GR-0-0	Cathode	6.3	1.200	0.2	13	8	Vert. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 2,000 Volts. Maximum D.C. Cathode Current = 55 Ma. Maximum Plate Dissipation = 10 Watts.									6DB5		
6DB6	T-5½	Pentode	7CM-0-2	Cathode	6.3	0.300	.0035*	6.0*	5.0*	Color Demod.	150	1.0	150	5.8	6.6	28,000	8,000	6DB6	
6DC6	T-5½	Pentode	7CM-0-7	Cathode	6.3	0.300	.02*	6.5*	2.0*	Amplifier	200	180*	150	9.0	3.0	500,000	2,050 μmhos when Eg 3 = -3 Volts.	6DC6	
6DC8	T-6½	Duodi. Pent.	9HE	Cathode	6.3	0.300	.0025*	5.0*	5.2*	R-F Amp.	200	1.5	100	11	3.3	.6 Meg. \downarrow	4,500	6DC8	
6DE6	T-5½	Pentode	7CM	Cathode	6.3	0.300	.015m	6.5	3.0	VHF Amp.	125 EC1 = -9 Volts for Ib = 20 μa .	56*	125	15.5	4.2	250,000	8,000	6DE6	
6DE7	T-6½	Duotriode	9HF	Cathode	6.3	0.900	4.0* 8.5*	2.2* 5.5*	0.52* 1.0*	Sect. No. 2 Vert. Defl. Amp. Sect. No. 1 Vert. Osc.	150 250	17.5 11.0	35.0 5.5	925 \downarrow 8,750 \downarrow	6,500 2,000	6 17.5	6DE7
6DG6GT	T-9	Beam Pent.	7S-0-0	Cathode	6.3	1.200	Power Amp.	110 200	7.5 180*	110 125	49 46	4.0 2.2	13,000 28,000	8,000 8,000	2,000 4,000	2,100 3,800	6DG6GT	
6DG7	T-6½	Pentode	9BA	Cathode	6.3	0.300	.0018*	5.5*	5.0*	R-F or I-F Amplifier	100 250	68* 68*	100 100	10.8 11.0	4.4 4.2	250,000 \downarrow 1 Meg. \downarrow	4,300 4,400	6DG7	
6DJ8	T-6½	Duotriode	9DE	Cathode	6.3	0.365	1.4*	3.3*	1.8*	VHF Amp.	90	1.3	15	2,700	12,500	33	6DJ8	
6DK6	T-5½	Pentode	7CM-0-7	Cathode	6.3	0.300	.02*	6.3*	1.9*	VHF Amp.	125	56*	125	12.0	3.8	9,800	6DK6	
6DN6	T-12	Beam Pent.	5BT-0-0	Cathode	6.3	2.500	0.8*	22.0*	11.5*	Horiz. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 6,600 Volts. Maximum D.C. Cathode Current = 200 Ma. Maximum Plate Dissipation = 15 Watts.									6DN6		
6DN7	T-9	Duotriode	8BD	Cathode	6.3	0.900	5.5 4.0	4.6 2.2	1.0 0.7	Sect. 2 Vert. Defl. Amp. Sect. 1 Vert. Osc.	250 250	9.5 8	41 8.0	2,000 9,000	7,700 2,500	15.4 22.5	6DN7
6DQ5	T-12	Beam Pent.	8JC	Cathode	6.3	2.500	0.5*	23*	11*	Horiz. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 7,000 Volts. Maximum D.C. Cathode Current = 285 Ma. Maximum Plate Dissipation = 24 Watts.									6DQ5		
6DQ6	T-12	Beam Pent.	6AM-0-0	Cathode	6.3	1.200	0.55*	15.0*	7.0*	Horiz. Defl. Amp.	6,000 Max. Peak Pos. Plate Volts. 120 Ma. Max. Cathode Current. 15 Watts Max. Plate Dissipation. 2.5 Watts Max. Screen Dissipation.									6DQ6		
6DQ6A	T-12	Beam Pent.	6AM	Cathode	6.3	1.200	0.55*	15.0*	7.0*	Horiz. Defl. Amp.	6,000 Max. Peak Pos. Plate Volts. 140 Ma. Max. Cathode Current. 15 Watts Max. Plate Dissipation. 2.5 Watts Max. Screen Dissipation.									6DQ6A		
6DR7	T-6½	Duotriode	9HF	Cathode	6.3	0.900	4.5* 8.5*	2.2* 5.5*	0.34* 1.0*	Sect. 2 Vert. Defl. Amp. Sect. 1 Vert. Osc.	150 250	17.5 3	10 1.4	925 40,000	6,500 1,600	6 68	6DR7

6DS5	T-5½	Beam Pent.	7BZ	Cathode	6.3	0.800	0.19*	9.5*	6.3*	Power Amp.	200 250	180 270 ^m	200 200	34.5 27	3.5 3	28,000 28,000	6,000 5,800	6,000 8,000	2,800 3,600	6DS5
6DT5	T-6½	Beam Pent.	9HN	Cathode	6.3	1.200	0.57*	12.5*	4.9*	Vert. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 2,200 Volts. Maximum D.C. Cathode Current = 55 Ma. Maximum Plate Dissipation = 9.0 Watts.										6DT5
6DT6	T-5½	Gated Beam	7EN-0-0	Cathode	6.3	0.300	.02	Quad. F. M. Det. Amplifier	150	560 ^m	100	1.1	2.1	150,000	615 Gr. #1 515 Gr. #3	6,250	6DT6
6DT8	T-6½	Duotriode	9DE	Cathode	6.3	0.300	1.6	2.7	1.6	100 250	270 ^m 200 ^m	3.7 10	15,000 10,900	4,000 5,500	60 60	6DT8
6DW5	T-6½	Beam Pent.	9CK	Cathode	6.3	1.200	0.5	14	9	Vert. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 2,200 Volts. Maximum D.C. Cathode Current = 65 Ma. Maximum Plate Dissipation = 11 Watts.										6DW5
											200	22.5	150	55	2.0	15,000	5,500	


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. (4) Average Contact potential bias developed across grid to plate; RF Input, Mixer Output. X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section. Plate and Target Supply Voltage. † Maximum Signal.

□ Applied through 20,000 ohms. Conversion Transconductance. ** Triode Operation.

‡ Plate to Plate. † Approximate.

m maximum. ^m Cathode Resistor (ohms).

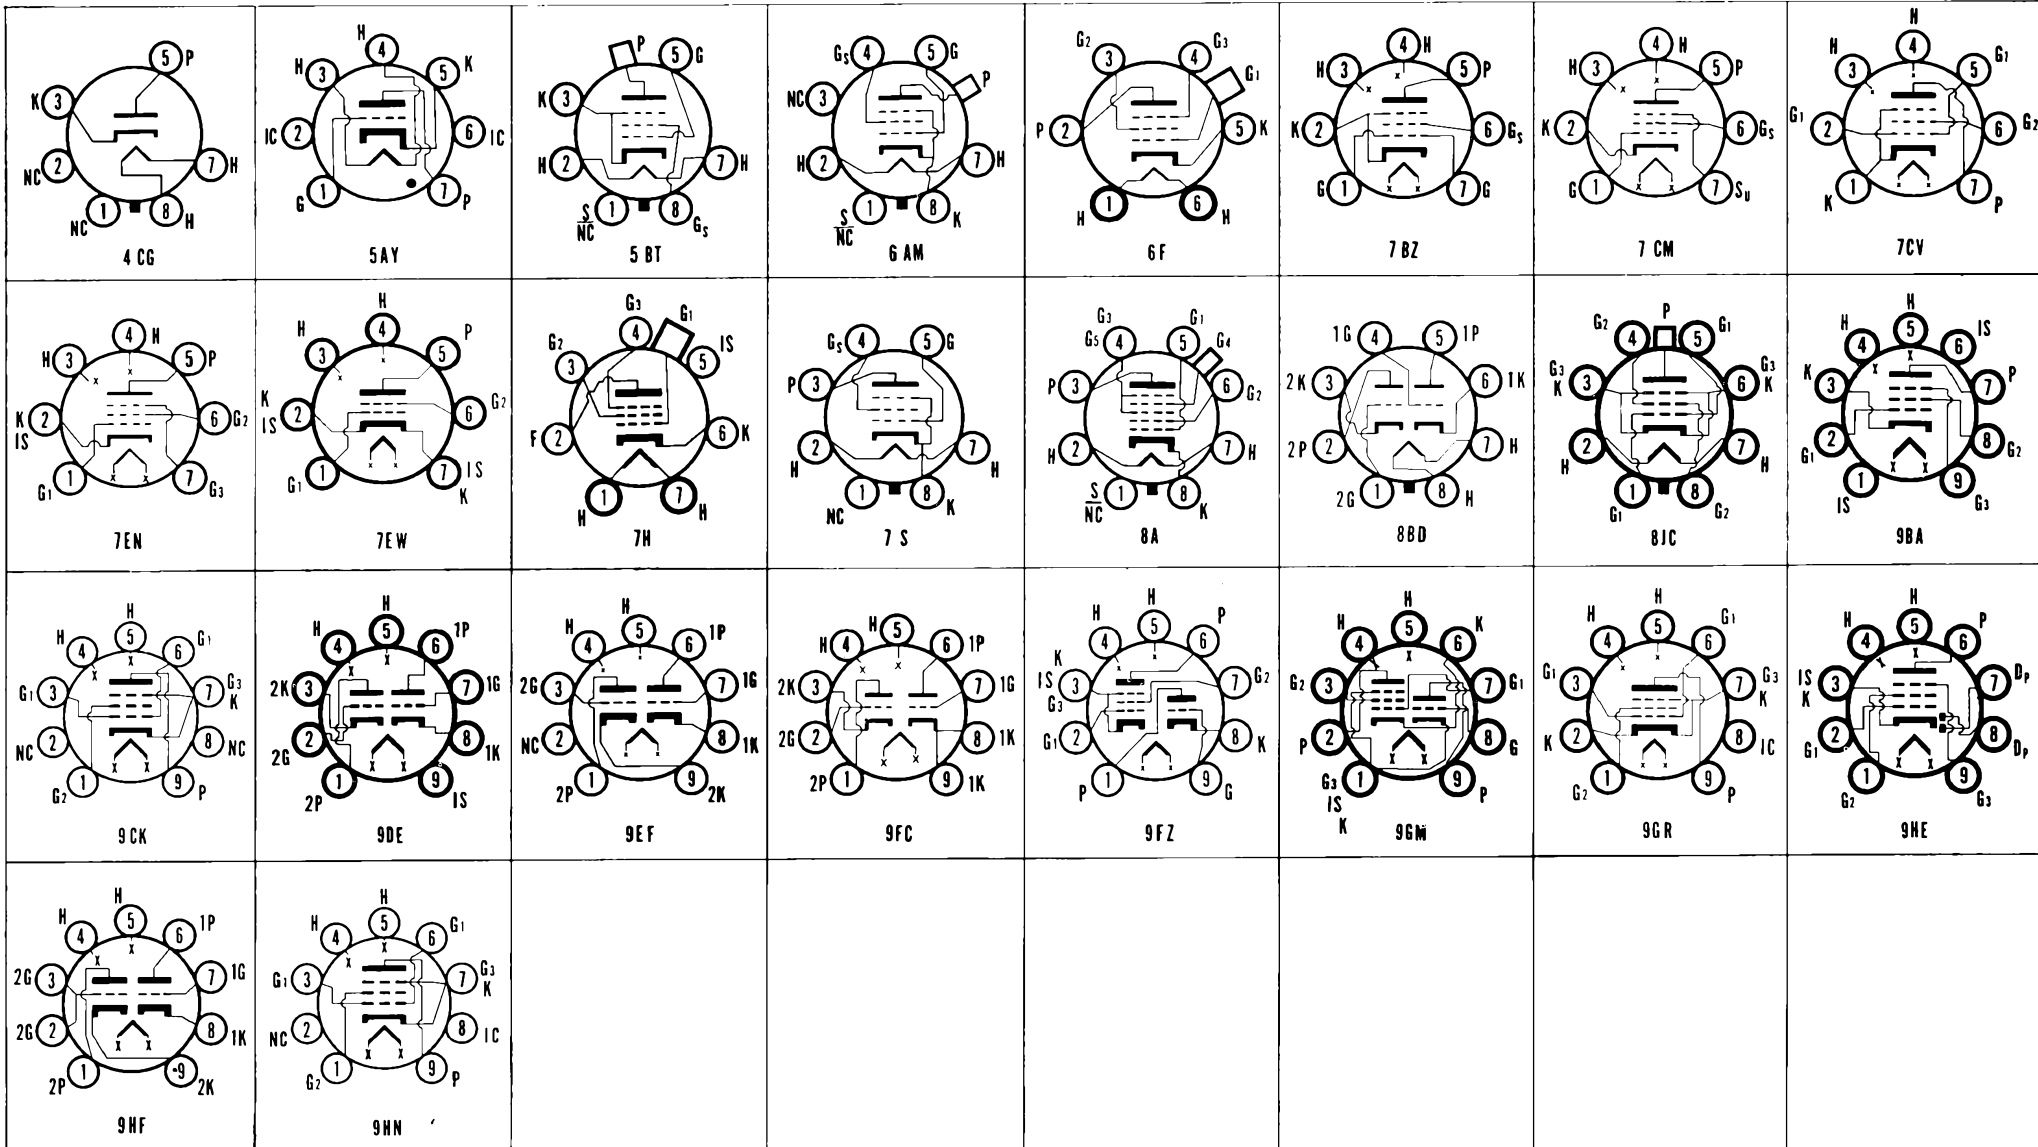


SYMBOLS FOR BASE DIAGRAMS: D_p—Diode Plate; F—Filament; F_c—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; H_c—Heater Center; H_t—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; R_c—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; X_S—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Amplifi- cation Factor	Ohms Load for Rated Power Output	Undis- torted Power Output Milli- watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
6DZ8	T-6½	Tri. Beam Pent.	6DZ8	Cathode	6.3	0.900	A-F Triode Volt. Amp. and Pent. Power Amp.	120	1500 ^m	0.8	71,000	1,400	100	6DZ8	
											145	180 ^m	120	45	6	2,500	7,500	2,500	2,000		
6E5	T-9	Electron Ray	6R-0-0	Cathode	6.3	0.300	Indicator	100 ^s	(Series Plate Resistor 0.5 Meg. Target Current 1.0 Ma. Grid Bias = 3.3 for 90° Shadow)										6E5
6E6	ST-14	Duotriode	7B-0-0	Cathode	6.3	0.600	Power Amp. (1 Section)	180	20.0	11.5	4,300	1,400	6.0	15,000 ^m	750	6E6	
6E7	ST-12	Pentode	7H-5-6	Cathode	6.3	0.300	Amplifier	250	27.5	18.0	3,500	1,700	6.0	14,000 ^m	1,600	6E7	
6EA8	T-6½	Tri. Pentode	9AE	Cathode	6.3	0.450	1.7	3.2	1.1	Tri. VHF Amp. Pent. Amp.	150	56 ^m	18	5,000	8,500	40	6EA8	
6EB8	T-6½	Tri. Pentode	9DX	Cathode	6.3	0.750	0.1	2.4	0.36	A-F Amp. Video Amp.	125	1.0	125	12	4	6,400	80,000	6EB8	
6EF6	T-9	Beam Pent.	7S	Cathode	6.3	0.900	0.8*	11.5*	9.0*	Vert. Defl. Amp.	250	2.0	2	37,000	2,700	100	6EF6	
6EH5	T-5½	Beam Pent.	7CV	Cathode	6.3	1.200	0.65*	17*	9*	S.T. A1 Amp.	110	62 ^m	115	42	11.5	11,000	14,600	3,000	1,400	6EH5 12EH5	
6EM5	T-6½	Beam Pent.	9HN	Cathode	6.3	0.800	0.7*	10*	5.1*	Vert. Defl. Amp.	250	18	250	50	2	5,000	6EM5	
6ES8	T-6½	Duotriode	9DE	Cathode	6.3	0.365	1.85	0.17	VHF Amp.	90	1.2	15	12,500	6ES8	
6EW6	T-5½	Pentode	7CM	Cathode	6.3	0.400	.03	10	3.4	VHF Amp.	125	56 ^m	125	11	3.2	200,000	14,000	6EW6	
6F4	Acorn	Triode	7BR-0-0	Cathode	6.3	0.225	1.9*	2.0*	0.6*	Amplifier	80	150 ^m	13.0	2,900	5,800	17	6F4	
6F5	Metal	Triode	5M-1-0	Cathode	6.3	0.300	2.3	5.5	4.0	Amplifier	250	2.0	0.9	66,000	1,500	100	6F5	
6F5GT	T-9	Triode	5M-0-0	Cathode	6.3	0.300	2.8*	5.2*	3.2*	Amplifier	250	2.0	0.9	66,000	1,500	100	6F5GT	
6F6	Metal	Power Pent.	7S-1-0	Cathode	6.3	0.700	Power Amp. S.T. A1 Amp. P.P. A1 Amp. P.P. AB2 Amp.	250	16.5	250	34.0	6.5	80,000	2,500	7,000	3,200	6F6	
6F6G	ST-14	Power Pent.	7S-0-0	Cathode	6.3	0.700	Power Amp. S.T. A1 Amp. P.P. A1 Amp. P.P. AB2 Amp.	285	20.0	285	38.0	7.0	78,000	2,550	7,000	4,800	6F6G	
6F6GT	T-9	Power Pent.	7S-0-0	Cathode	6.3	0.700	Power Amp. S.T. A1 Amp. P.P. A1 Amp. P.P. AB2 Amp.	315	24.0	285	62-80†	12-19.5†	(Current & Output for Two Tubes)	10,000 ^m	10,000 ^m	11,000	6F6GT
6F7	ST-12	Pent. Triode	7E-0-6	Cathode	6.3	0.300	.008m	3.2	12.5	Pent. Amp. Pent. Amp. Tri. Amp.	100	3.0	100	6.3	1.6	290,000	1,050	Pentode Section	6F7	
6F7S	ST-12	Pent. Triode	7E-6-6	Cathode	6.3	0.300	2.0*	2.5*	3.0*	Pent. Amp. Tri. Amp.	250	3.0	100	6.5	1.5	850,000	1,100	Pentode Section	6F7S	
6F8G	ST-12	Duotriode	8G-0-0	Cathode	6.3	0.600	3.8*	3.2*	1.0*	Amplifier Inverter	250	8.0	9.0	7,700	2,600	20	(One Section)	6F8G	
6FH6	T-12	Beam Pent.	6AM	Cathode	6.3	1.200	0.4	33	8	Horiz. Defl. Amp.	250	22.5	150	75	1.7	12,000	6,000	6FH6	
6G5	Now Known as Type 6U5																				6G5	
6G6G	ST-12	Power Pent.	7S-0-0	Cathode	6.3	0.150	Power Amp.	135	6.0	135	11.5	2.0	170,000	2,100	12,000	600	6G6G	
6H4GT	T-9	Diode	5AF-0-0	Cathode	6.3	0.150	Rectifier	100	4.0	6H4GT	
6H6, 6H6GT	T-9, Metal	Duotriode	7Q-0-1	Cathode	6.3	0.300	Rectifier	117	A-C Volts Per Plate, RMS, 8.0 Ma. Output Current Per Plate.										6H6GT, 6H6
6J4	T-5½	Triode	7BQ-0-0	Cathode	6.3	0.400	3.9	4.6	0.24	Amplifier	150	100 ^m	15.0	4,500	12,000	55	6J4	
6J5	Metal	Triode	6Q-1-0	Cathode	6.3	0.300	3.4	3.4	3.6	Amplifier	250	8.0	9.0	7,700	2,600	20	6J5	
6J5GT	T-9	Triode	6Q-1-0	Cathode	6.3	0.300	3.8	4.2	5.0	Amplifier	250	8.0	9.0	7,700	2,600	20	6J5GT	
6J6	T-5½	Duotriode	7BF-0-7	Cathode	6.3	0.450	1.5	2.6	1.6	VHF Osc. VHF Amp.	150	10.0	30.0	3,500	6J6	
6J6A	T-5½	Duotriode	7BF-0-7	Cathode	6.3	0.450	1.5	2.6	1.0	VHF Osc. VHF Amp.	100	50 ^m	8.5	7,100	5,300	38	6J6A	
6J7	Metal	Pentode	7R-1-1	Cathode	6.3	0.300	.005m	7.0	12.0	R-F Amp.	250	3.0	100	2.0	0.5	1.0 Meg.	1,225	6J7	
6J7G	ST-12	Pentode	7R-0-1	Cathode	6.3	0.300	.007m	5.4	12.0	R-F Amp.	250	3.0	100	2.0	0.5	1.0 Meg.	1,225	6J7G	
6J7GT	T-9	Pentode	7R-1-1	Cathode	6.3	0.300	.007m	5.4	12.0	R-F Amp.	250	3.0	100	2.0	0.5	1.0 Meg.	1,225	6J7GT	
6J8G	ST-12	Tri. Heptode	8H-0-8	Cathode	6.3	0.300	.02m	4.4	10.0	Mixer Oscillator	250	3.0	100	1.3	2.9	4.0 Meg.	290 ^m	6J8G	
6K4	T-3	Triode	6K4	Cathode	6.3	0.150	2.2*	2.4*	0.85*	Osc. Amp.	100	2.0	12.0	3,650	5,500	20	6K4	
6K5G	ST-12	Triode	5U-0-0	Cathode	6.3	0.300	2.0	2.9	5.75	Amplifier	100	1.5	0.35	78,000	900	70	6K5G	
6K5GT	T-9	Triode	5U-0-0	Cathode	6.3	0.300	2.8	2.9	4.7	Amplifier	250	3.0	1.10	50,000	1,400	70	6K5GT	
6K6GT	T-9	Power Pent.	7S-0-0	Cathode	6.3	0.400	S.T. A1 Amp.	100	7.0	100	9.0	1.6	104,000	1,500	12,000	350	6K6GT	
6K7	Metal	Pentode	7R-1-0	Cathode	6.3	0.300	.005m	7.0	12.0	R-F Amp.	250	1.0	100	9.5	2.7	150,000 ^m	1,650	6K7	
6K7G	ST-12	Pentode	7R-0-8	Cathode	6.3	0.300	.007m	5.0	12.0	R-F Amp.	250	3.0	100	7.0	1.7	800,000 ^m	1,450	6K7G	
6K7GT	T-9	Pentode	7R-1-8	Cathode	6.3	0.300	.005m	4.6	12.0	R-F Amp.	250	3.0	125	10.5	2.6	600,000 ^m	1,650	6K7GT	
6K8	Metal	Tri. Hexode	8K-1-0	Cathode	6.3	0.300	.03m	6.6	3.5	Mixer Osc.	250	3.0	100	2.5	6.0	600,000	350 ^m	6K8	
6K8G	ST-12	Tri. Hexode	8K-0-8	Cathode	6.3	0.300	.08m	4.6	4.8	Mixer Osc.	100	3.0	100	2.5	6.0	600,000	350 ^m	6K8G	
6K8GT	T-9	Tri. Hexode	8K-1-8	Cathode	6.3	0.300	.08m	5.0	4.3	Mixer Osc.	100	3.0	100	2.5	6.0	600,000	350 ^m	6K8GT	
6L4	Acorn	Triode	7BR-0-0	Cathode	6.3	0.225	1.6*	1.8*	0.5*	Osc. Amp.	80	150 ^m	9.5	4,400	6,400	28	6L4	
6L5G	ST-12	Triode	6Q-0-0	Cathode	6.3	0.150	2.8	2.8	5.0	Amplifier	100	3.0	4.0	10,000	1,500	15	6L5G	
											250	9.0	8.0	9,000	1,900	17		

6L6 6L6G 6L6GA 6L6GB	Metal ST-16 ST-14 T-12	Beam Pent.	7S-1-0 7S-0-0 7S-0-0 7S-0-0	Cathode	6.3	0.900	0.9*	11.5*	9.5*	S.T. A1 Amp. S.T. A1 Amp. P.P. AB1 Amp. P.P. AB2 Amp.	250 350 270 360	14.0 18.0 17.5 22.5	250 250 270 270	72.0 54.0 134-155† 88-132†	5.0 2.5 11-17† 5-15†	22,500 33,000 23,500 (Current & Output for Two Tubes)	6,000 5,200 5,700 (Current & Output for Two Tubes)	2,500 4,200 5,000† 6,600†	6,500 10,800 17,500 26,500	6L6 6L6G 6L6GA 6L6GB	
6L6GAY	ST-14	Beam Pent.	7S-0-0	Cathode	6.3	0.900				Power Amp.	250	6.0	150	3.3	9.2	1 Meg. >	350▲	(G3 = Neg. 15 Volts)	6L6GAY		
6L7 6L7G	Metal ST-12	Heptode	7T-1-1 7T-0-8	Cathode	6.3	0.300	.001m .005m	7.5 6.0	11.0 10.0	Amplifier Mixer Amp.	250 250	6.0 3.0	100	5.3	6.5	600,000	1,100	(G3 = Neg. 3.0 Volts)	6L7 6L7G		
6M3	T-12	Diode	8GV	Cathode	6.3	3.000				H-W Rect.	Television Service. Peak Inverse Volts = 6 KV. Output = 320 Ma.										6M3
6M5	T-6½	Beam Pent.	9N-0-0	Cathode	6.3	0.710	1.0m	10.0	6.2	Power Amp.	250	170*	250	36	5.2	40,000	10,000	7,000	3,900	6M5	
6N4	T-5½	Triode	7CA-0-0	Cathode	6.3	0.900	1.1	3.0	1.6	Amplifier	180	3.5		12.0		5,400 †	6,000 †	32		6N4	
6N6G	ST-14	Duotriode	7AU-0-0	Cathode	6.3	0.800				Power Amp.	300 300	0.0 0.0			8.0 45.0	24,000 †	2,400	58 7,000	4,000	6N6G	

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. # Per Tube or Section. □ Applied through 20,000 ohms.
(2) Converter tube capacitances given are signal grid to plate, RF input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor. † Maximum Signal. § Plate and Target Supply Voltage. ▲ Conversion Transconductance. †† Plate to Plate.
‡ Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.) ** Triode Operation. m maximum. ††† Cathode Resistor (ohms).

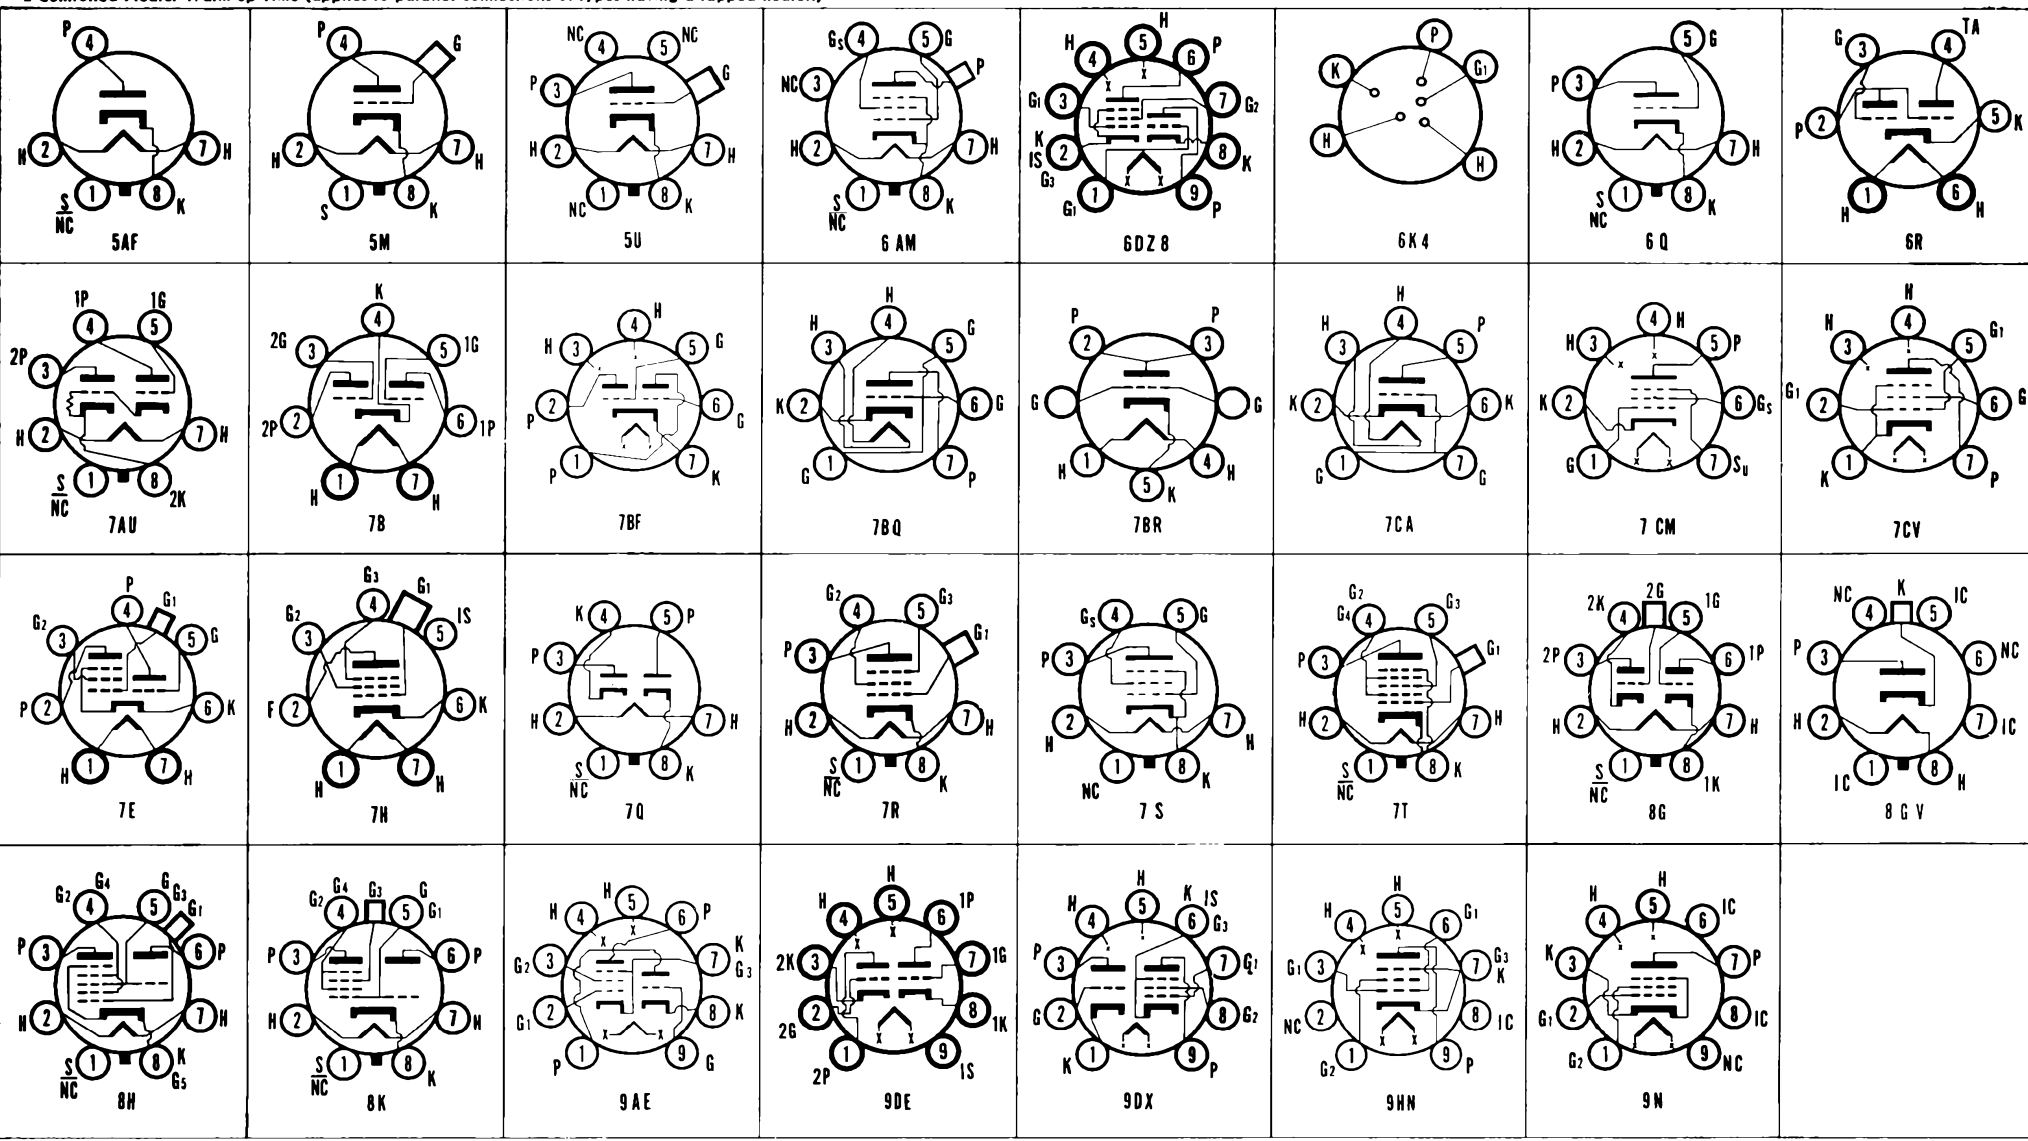

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.


SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Rated Power Output	Power Output Milli- watts	Type	
	Bulb Size or Style	Class	Biasing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
6N7GT 6N7	T-9 Metal	Duotriode	8B-0-0	Cathode	6.3	0.800	Power Amp. Driver Driver	300 250 294	0.0 5.0 6.0 7.0	17.5-35† 6.0 7.0	Per Plate, Class B Push-Pull Sections Paralleled	11,300 11,000	3,100 3,200	35 35	8,000% (Class A Driver)	10,000 (Class A Driver)	6N7GT 6N7	
6N8 6P5GT	T-6½ T-9	Duodi. Pent. Triode	9T-0-0 6Q-0-0	Cathode	6.3	0.300 0.300	.002m 2.6	4.0 3.4	4.6 5.5	R-F Amp. Amplifier Detector	250 250 250	2 13.5 20.0 †	8.5	5 (Plate Current to be adjusted to 0.2 Ma. with no Input Signal)	1.75	1.6 Meg. 9,500	2,200 1,450 13.8	6N8 6P5GT	
6P7G	ST-12	Pent. Triode	7U-0-8	Cathode	6.3	0.300	.007m 2.0	2.8 2.7	12.0 2.5	R-F Amp.	Characteristics Same as Type 6F7, Except Capacitances.										6P7G	
6Q4	T-6½	Triode	9S-0-0	Cathode	6.3	0.480	3.4	5.4	.06m	R-F Amp.	250	1.0	15	12,000	80	6Q4	
6Q7 6Q7G 6Q7GT	Metal ST-12 T-9	Duodiode Tri.	7V-1-8 7V-0-8 7V-1-8	Cathode	6.3	0.300	1.4 1.5 1.6	5.0 3.2 2.2	3.8 5.0 5.0	Det. Amp.	100 250	1.5 3.0	0.8 1.1	58,000 58,000	1,900 1,200	70 70	6Q7 6Q7G 6Q7GT	
6R4 6R6G	T-6½ ST-12	Triode Pentode	9R-0-0 6AW-0-0	Cathode	6.3	0.200 0.300	1.5 .007m	1.7 4.5*	0.5 11.0*	Oscillator R-F Amp.	150 250	2 3.0 100	30 7.0 1.7 800,000	5,500 1,450	16 1,160	6R4 6R6G	
6R7 6R7GT	Metal T-9	Duodiode Tri.	7V-1-1 7V-0-8	Cathode	6.3	0.300	2.3 2.1	4.8 2.6	3.8 5.2	Det. Amp.	250	9.0	9.5	8,500	1,900	16	6R7 6R7GT	
6R8 6S4	T-6½ T-6½	Triple Dio. Tri. Triode	9E-0-3&8 9AC-0-0	Cathode	6.3	0.450 0.500	2.4 2.6*	1.5* 4.2*	1.1* 0.9*	Det. Amp. Vert. Defl. Amp.	250	9	9.5	8,500	1,900	16	10,000	300	6R8 6S4	
6S4A	T-6½	Triode	9AC-0-0	Cathode	6.3I	0.600	2.6*	4.2*	0.9*	Vert. Defl. Amp.	Characteristics Same as Type 6S4. (6S4A Designed for Series String TV Receivers) Except Plate Dissipation = 8.5 Watts										6S4A	
6S7 6S7G	Metal ST-12	Pentode	7R-1-1 7R-0-8	Cathode	6.3	0.150	.005m .008m	6.5 4.4	10.5 8.0	R-F Amp.	1135 250	3.0 3.0	67.5 100	3.7 8.5	0.9 2.0	1 Meg. 1Meg.	1,250 1,750	6S7 6S7G	
6S8GT	T-9	Triple Dio. Tri.	8CB-0-2	Cathode	6.3	0.300	2.0	1.2	5.0	Det. Amp.	250	2.0	0.9	91,000	1,100	100	6S8GT	
6SA7 6SA7GT 6SA7GY	Metal T-9 T-9	Heptode	8R-1-0 8AD-0-6 8AD-1-6	Cathode	6.3	0.300	0.25m 0.5m 0.5m	9.5 9.5 9.5	9.5 9.5 9.5	Converter	100 250 Low Loss Base	2.0 2.0 2.0	100 100	3.3 3.5	8.5 8.5	500,000 † 1.0 Meg. †	425 † 450 †	6SA7 6SA7GT 6SA7GY	
6SB7Y	Metal	Heptode	8R-1-0	Cathode	6.3	0.300	0.13m	9.6	9.2	Converter	250	1.5	100	4.0	8.5	880 †	6SB7Y	
6SC7, 6SC7GT	Metal, T-9	Duotriode	8S-1-0	Cathode	6.3	0.300	2.0	2.0	3.0	Amplifier	250	2.0	2.0	53,000	1,325	70	(Each Triode)	6SC7, 6SC7GT	
6SD7GT	T-9	Pentode	8N-1-5	Cathode	6.3	0.300	.0035	9.0	7.5	R-F Amp.	100 250	2.0 2.0	100 100	5.7 6.0	2.0 1.9	250,000 † 1.0 Meg. †	3,350 3,600	6SD7GT	
6SE7GT	T-9	Pentode	8N-1-5	Cathode	6.3	0.300	.0035m	6.0	7.5	R-F Amp.	100 250	1.0 1.5	100 100	5.5 4.5	2.4 1.5	250,000 † 1,000,000 †	3,100 3,400	6SE7GT	
6SF5 6SF5GT	Metal T-9	Triode	6AB-1-0 6AB-0-0	Cathode	6.3	0.300	2.4 2.6	4.0 4.2	3.6 3.8	Amplifier	250	2.0	0.9	66,000	1,500	100	6SF5 6SF5GT	
6SF7	Metal	Diode Pent.	7AZ-1-1	Cathode	6.3	0.300	.004m	5.5	6.0	Det. Amp.	100 250	1.0 1.0	100 100	12 12.4	3.4 3.3	200,000 † 700,000 †	1,975 2,050	6SF7	
6SG7 6SG7GT	Metal T-9	Pentode	8BK-1-1	Cathode	6.3	0.300	.003m .004m	8.5 8.5	7.0 7.0	R-F Amp.	100 250	1.0 1.0	100 150	8.2 11.8 9.2	3.2 4.4 3.4	250,000 † 900,000 † 1 Meg. >	4,100 4,700 4,000	6SG7 6SG7GT	
6SH7 6SH7GT	Metal T-9	Pentode	8BK-1-1	Cathode	6.3	0.300	.003m .004m	8.5 8.5	7.0 7.0	R-F Amp.	100 250	1.0 1.0	100 150	5.3 10.8	2.1 4.1	350,000 † 900,000 †	4,000 4,900	6SH7 6SH7GT	
6SJ7 6SJ7GT 6SJ7WGT (3) 6SJ7GY	Metal T-9 T-9 T-9	Pentode	8N-1-5 8N-0-5 8N-0-5 8N-0-5	Cathode	6.3	0.300	.005m .005m .005m .005m	6.0 7.0 7.0 7.0	7.0 7.0 7.0 7.0	R-F Amp.	100 250 Ruggedized Version Low Loss Base	3.0 3.0 3.0	100 100	2.9 3.0	0.9 0.8	700,000 † 1.0 > Meg. †	1,575 1,650	6SJ7 6SJ7GT 6SJ7WGT (3) 6SJ7GY
6SK7 6SK7GT 6SK7GY	Metal T-9 T-9	Pentode	8N-1-1 8N-1-5 8N-1-5	Cathode	6.3	0.300	.003m .005m .005m	6.0 6.5 6.5	7.0 7.5 7.5	R-F Amp.	100 250 Low Loss Base	1.0 3.0	100 100	13.0 9.2	4.0 2.6	120,000 † 800,000 †	2,350 2,000	6SK7 6SK7GT 6SK7GY	
6SL7GT 6SL7WGT (3)	T-9	Duotriode	8BD-0-0	Cathode	6.3	0.300	2.8* 2.8*	3.0* 3.4*	3.2* 3.2*	Amplifier†	250	2.0	2.3	44,000	1,600	70	6SL7GT 6SL7WGT (3)	
6SN7GT 6SN7WGT (3)	T-6½	Duotriode	9BD-0-0	Cathode	6.3	0.600	3.8* 4.0*	2.8* 3.0*	0.8* 1.2*	Amplifier	90 250	0 8.0	10.0 9.0	6,700 7,700	3,000 2,600	20 20	6SN7GT 6SN7WGT (3)	
6SN7GTA 6SN7GTB	T-9	Duotriode	8BD	Cathode	6.3	0.600 0.600	4.0* 3.8*	2.2* 2.6*	0.7* 0.7*	Vertical Osc. Amp.	Same as 6SN7GT except for Higher Maximum Plate Voltage and Dissipation Ratings. (6SN7GTB designed for Series String TV Receivers)										6SN7GTA 6SN7GTB	
6SQ7 6SQ7GT	Metal T-9	Duodiode Tri.	8Q-1-1 8Q-1-3	Cathode	6.3	0.300	1.6 1.8	3.2 4.2	3.0 3.4	Det. Amp.	250	2.0	1.1	85,000	1,175	100	6SQ7 6SQ7GT	
6SR7 6SR7GT	Metal T-9	Duodiode Tri.	8Q-1-1 8Q-0-3	Cathode	6.3	0.300	2.4 2.3	3.6 3.5	2.8 3.8	Det. Amp.	250	9.0	9.5	8,500	1,900	16	6SR7 6SR7GT	
6SS7	Metal	Pentode	8N-1-0	Cathode	6.3	0.150	.004m	5.5	7.0	R-F Amp.	100 250	1.0 3.0	100 100	12.2 9.0	3.1 2.0	120,000 † 1,000,000 †	1,950 1,850	6SS7	
6ST7 6SU7GY	Metal T-9	Duodiode Tri. Duotriode	8Q-1-0 8BD-0-0	Cathode	6.3	0.150 0.300	1.5	2.8	3.0	Det. Amp. Amplifier	250 250	9.0 2.0	9.5 2.3	8,500 44,000	1,900 1,600	16.0 70	6ST7 6SU7GY	
6SV7	Metal	Diode Pent.	7AZ-1-0	Cathode	6.3	0.300	.004m	6.5	6.0	Det. Amp.	250	1.0	150	7.5	2.8	1.5 Meg.	3,600	6SV7	
6SZ7	Metal	Duodiode Tri.	8Q-1-0	Cathode	6.3	0.150	1.1	2.6	2.8	Amplifier	250	3.0	1.0	58,000	1,200	70	6SZ7	
6T4	T-5½	Triode	7DK	Cathode	6.3	0.225	1.7*	2.6*	0.4*	UHF Osc.	80	150	18	1,860	7,000	13	6T4	
6T5 6T7G	ST-12 ST-12	Electron Ray Duodiode Tri.	6R-0-0 7V-0-8	Cathode	6.3	0.300 0.150 1.7 1.8 3.1	Indicator Det. Amp.	250§ 100 250	Series Plate Resistor 1.0 Meg. Target Current 3.0 Ma. Grid Bias 22 Volts for Max. Target Illumination.										6T5 6T7G

6T8 6T8A	T-6½	Triple Dio. Tri.	9E-0-3 & 7	Cathode	6.3 6.3I	0.450 0.450	1.7	1.7	2.4	Det. Amp.	100 250	1.0 3.0	0.8 1.0	54,000 58,000	1,300 1,200	70 70	6T8 6T8A			
6U4GT	T-9	Diode	4CG-0-0	Cathode	6.3	1.200				H-W Rect.	350 A.C. Volts Per Plate, R.M.S., 125 Ma. Output Current. Condenser Input to Filter.						6U4GT			
6U5	T-9	Electron Ray	6R-0-0	Cathode	6.3	0.300				Indicator	100 250	(Series Plate Resistor 0.5 Meg., Target Current 1.0 Ma., Grid Bias -8.0 for 0° Shadow.) (Series Plate Resistor 1.0 Meg., Target Current 4.0 Ma., Grid Bias -22.0 for 0° Shadow.)						6U5		
6U6GT	T-9	Beam Pent.	7S-0-0	Cathode	6.3	0.750				Power Amp.	110 200	10.5 14.0	110 135	44.0 55.0	4.0 3.0	10,000 20,000	5,600 6,200	2,000 3,000	2,000 5,500	6U6GT
6U7G	ST-12	Pentode	7R-0-8	Cathode	6.3	0.300	.007m	5.0	9.0	R-F Amp.	100 250	3.0 3.0	100 100	8.0 8.2	2.2 2.0	250,000 800,000	1,500 1,600			6U7G
6U8 6U8A	T-6½	Tri. Pentode	9AE-0-7	Cathode	6.3 6.3I	0.450 0.450	1.8 .006	2.8 5.0	2.0 3.5	VHF Osc. VHF Amp.	125 125	-1 -1	110	13.5 9.5	3.5	5,000 200,000	7,500 5,000	40		6U8 6U8A

(1) Values are given shielded unless marked with (*). (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (3) Has special mechanical and/or life characteristics. (4) Average contact potential bias developed across specified grid resistor. # Per Tube or Section. § Plate and Target Supply Voltage. † Maximum Signal. □ Applied through 20,000 ohms. †† Plate to Plate. ‡ Conversion Transconductance. ††† Approximate. m maximum. ■ Cathode Resistor (ohms).

I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

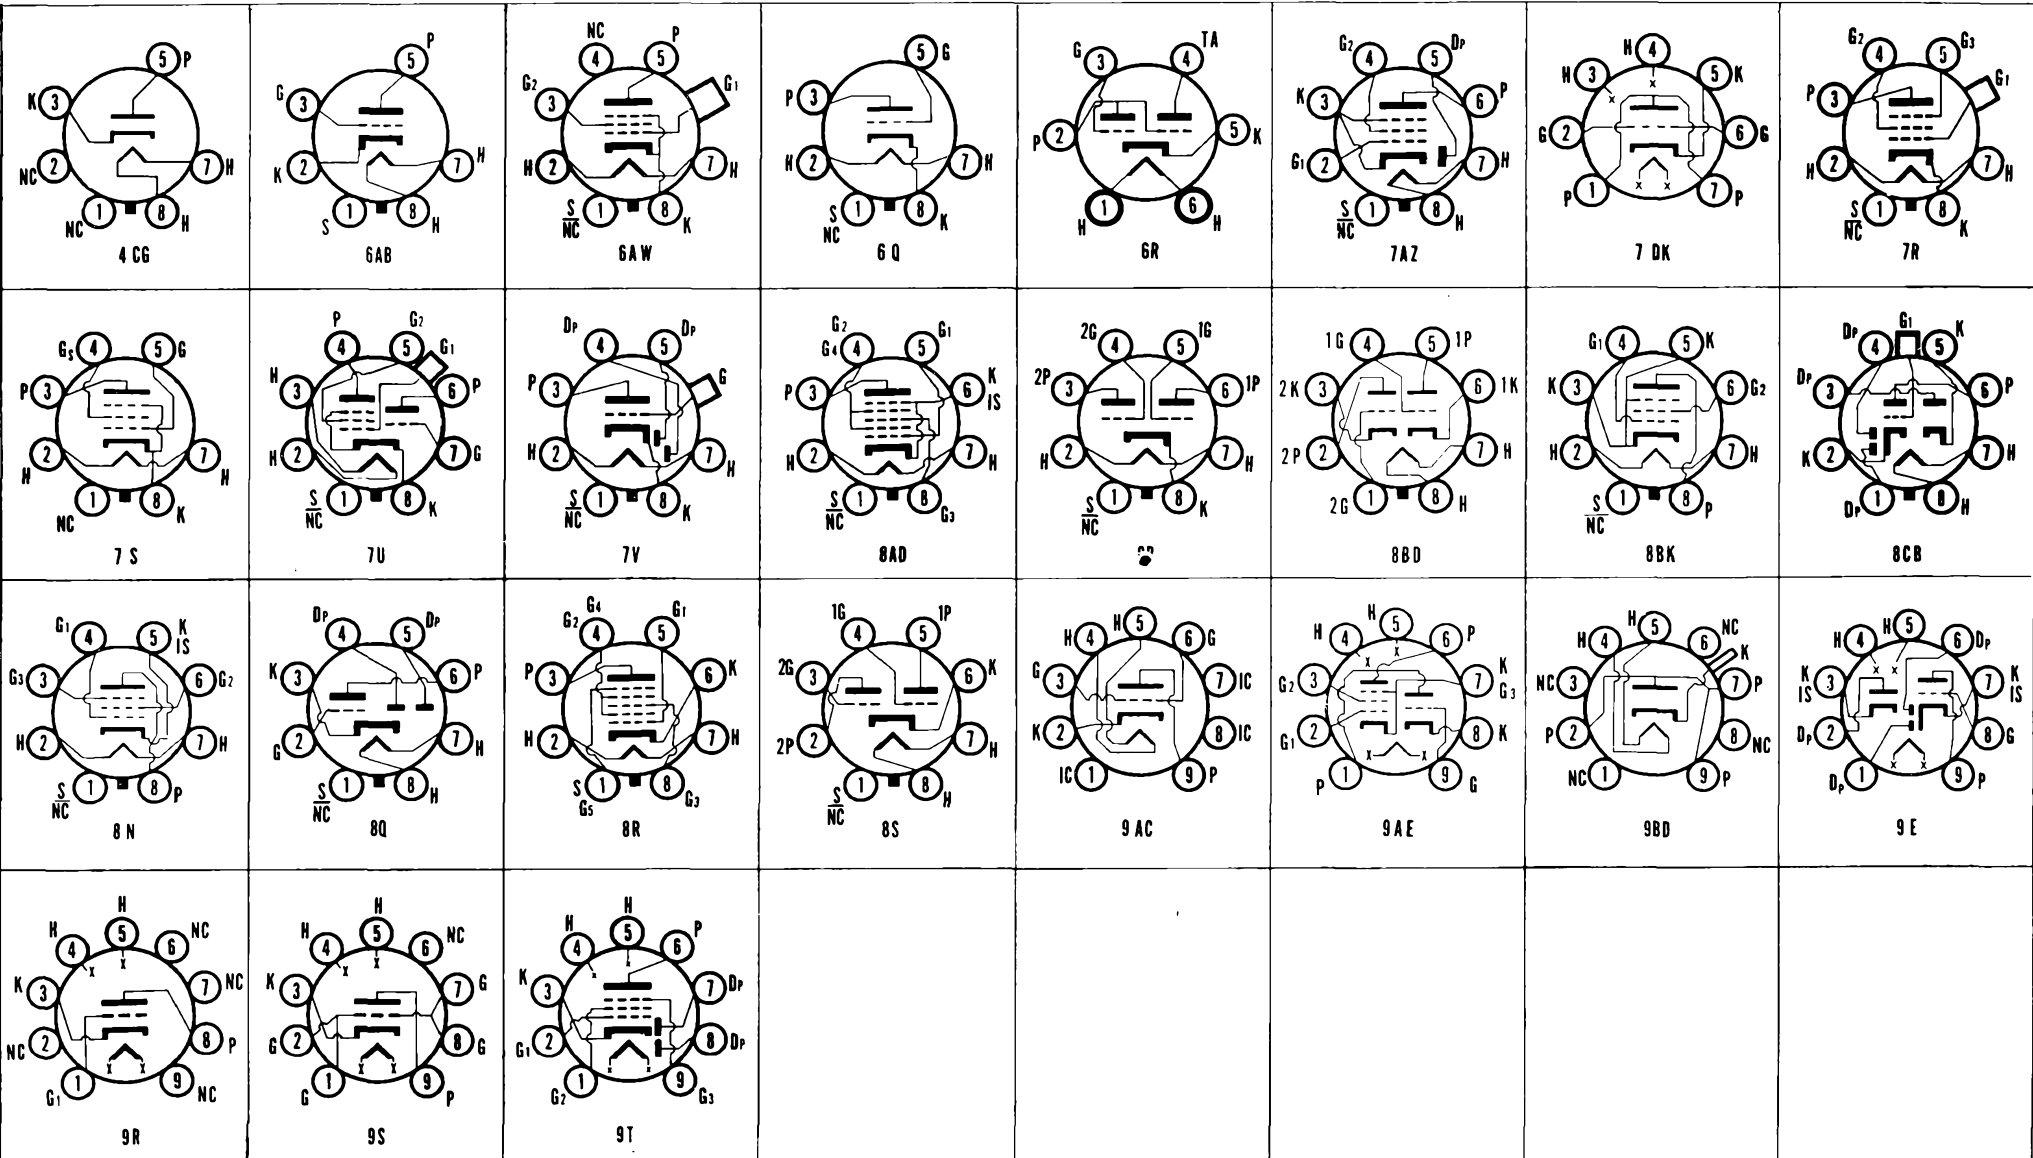


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milli-watts	Type
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
6V3, 6V3A	T-6½	Diode	9BD	Cathode	6.3	1.750	T.V. Damper	P.I.V. = 6,000 Volts Abs. Max., D-C Plate Current = 135 Ma. Max.										6V3, 6V3A
6V4	T-6½	Duodiode	9M-0-0	Cathode	6.3	0.600	F-W Rect.	350 A-C Volts Per Plate, R.M.S. 90 Ma. Output Current. Condenser Input to Filter.										6V4
6V5GT	T-9	Pentode	6AO-0-0	Cathode	6.3	0.450	0.6	9.0	10.0	Power Amp. Push Pull	250 250	12.5 15	250 250	45 70	4.5 5.0	4,100	5,000 10,000†	4,500 10,000	6V5GT
6V6 6V6GT 6V6GT 6V6GT	Metal T-9 T-9 T-9 T-9	Beam Pent.	7S-1-0 7S-0-0 7S-0-0 7S-0-0	Cathode	6.3	0.450	0.3 0.7* 0.7* 0.7*	10.0 9.0* 9.0* 9.0*	11.0 7.5* 7.5* 7.5*	Power Amp. Class A1 Amplifier Class AB1 Amplifier	180 250 315 250 285	8.5 12.5 13.0 15.0 19.0	180 250 225 250 285	29.0 45.0 34.0 70-79† 70-92†	3.0 4.5 2.2 5-13† 4-13.5†	50,000 50,000 80,000	3,700 4,100 3,750	5,500 5,000 8,500 10,000†	2,000 4,500 5,500 10,000	6V6 6V6GT 6V6GT 6V6GT
6V7G	ST-12	Duodiode Tri.	7V-0-8	Cathode	6.3	0.300	1.3	1.5	6.0	Det. Amp.	135 180 250	10.5 13.5 20.0	3.7 6.0 8.0	11,000 8,500 7,500	750 975 1,100	8.3 8.3 8.3	25,000 20,000 20,000	75 160 350	6V7G
6V8	T-6½	Triple Diode Triode	9AH-0-3	Cathode	6.3	0.450	Det. Amp.	100 250	1.0 3.0	0.8 1.0	54,000 58,000	1,300 1,200	70 70	6V8
6W4GT	T-9	Diode	4CG-0-0	Cathode	6.3	1.200	H-W Rect.	350 A-C Volts, RMS, 125 Ma. DC Output. Condenser Input to Filter.										6W4GT
6W5G	ST-12	Duodiode	6S-0-0	Cathode	6.3	0.900	F-W Rect.	325 A-C Volts Per Plate, RMS, 90 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 90 Ma. Output Current. Choke Input to Filter.										6W5G
6W6GT	T-9	Beam Pent.	7S-0-0	Cathode	6.3	1.200	0.8*	15.0*	9.0*	Power Amp. Vert. Def. Amp.	110 200	7.5 180*	110 125	49 46	4.0 2.2	13,000 28,000	8,000 8,000	2,000 4,000	2,100 3,800	6W6GT
6W7G	ST-12	Pentode	7R-0-8	Cathode	6.3	0.150	.007m	5.0	8.5	R-F Amp.	250	3.0	100	2.0	0.5	1.5 Meg. †	1,225	6W7G
6X4	T-5½	Duodiode	5BS-0-0	Cathode	6.3	0.600	F-W Rect.	310 Volts RMS Per Plate, 70 Ma. D-C Output. Condenser Input to Filter.										6X4
6X5 6X5GT 6X5WGT (3)	Metal T-9 T-9 T-9	Duodiode	6S-0-0	Cathode	6.3	0.600	F-W Rect.	325 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Choke Input to Filter.										6X5 6X5GT 6X5WGT (3)
6X8 6X8A	T-6½	Triode Pentode	9AK	Cathode	6.3 6.3I	0.450 0.450	1.5 .06	2.4 4.8	1.0 1.6	VHF Osc. VHF Amp.	125 125	1.0 1.0	12 9 2.2	6,000 0.3 Meg. †	6,500 5,500	40	6X8 6X8A
6Y3G	ST-12	Diode	4AC-0-0	Cathode	6.3	0.700	H-W Rect.	5,000 A-C Volts Per Plate, RMS, 7.5 Ma. Output Current. Choke or Condenser Input to Filter.										6Y3G
6Y5	ST-12	Duodiode	6J-2-0	Cathode	6.3	0.800	F-W Rect.	350 A-C Volts Per Plate, RMS, 50 Ma. Output Current.										6Y5
6Y6G 6Y6GA	ST-14 T-12	Beam Pent.	7S-0-0	Cathode	6.3	1.250	Power Amp.	135 200	13.5 14.0	135 135	58.0 61.0	3.5 2.2	9,300 18,300	7,000 7,100	2,000 2,600	3,600 6,000	6Y6G 6Y6GA
6Y7G	ST-12	Duotriode	8B-0-0	Cathode	6.3	0.600	Power Amp.	250	0.0	10.5-46†	(Class B Operation)	14,000†	8,000	6Y7G	
6Z4	ST-12	Duodiode	5D-0-0	Cathode	6.3	0.500	F-W Rect.	325 A-C Volts Per Plate, RMS, 60 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 60 Ma. Output Current. Choke Input to Filter.										6Z4
6Z5/12Z5	ST-12	Duodiode	6K-0-0	Cathode	6.3 12.6	0.800 0.400	F-W Rect.	230 A-C Volts Per Plate, RMS, 60 Ma. Output Current.										6Z5/12Z5
6Z7G	ST-12	Duotriode	8B-0-0	Cathode	6.3	0.300	Power Amp.	135	0.0	6-40†	(Class B Operation)	9,000†	2,500	6Z7G	
6ZY5G	ST-12	Duodiode	6S-0-0	Cathode	6.3	0.300	F-W Rect.	325 A-C Volts Per Plate, RMS, 40 Ma. Output Current. Condenser Input to Filter.										6ZY5G
7A4/XXL	Lock-in	Triode	5AC-L-0	Cathode	6.3	0.300	4.0	3.4	3.0	Amplifier	90 250	0.0 8.0	10.0 9.0	6,700 7,700	3,000 2,600	20 20	7A4/XXL
7A5	Lock-in	Beam Pent.	6AA-L-0	Cathode	6.3	0.750	0.44	13.0	7.2	Power Amp.	110 125	7.5 9.0	110 125	40.0 44.0	3.0 3.3	16,000 17,000	5,800 6,000	2,500 2,700	1,500 2,200	7A5
7A6	Lock-in	Duodiode	7DX-L-5	Cathode	6.3	0.150	Det. Rect.	150 A-C Volts Per Plate, RMS, 8 Ma. Current Output Per Plate.										7A6
7A7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.300	.003m	6.0	7.0	R-F Amp.	100 250	1.0 3.0	100 100	13.0 9.2	4.0 2.6	120,000 † 800,000 †	2,350 2,000	7A7
7A8	Lock-in	Octode	8U-L-7	Cathode	6.3	0.150	0.15m	7.5	9.0	Converter	100 250	3.0 3.0	75 100	1.8 3.0	2.7 3.2	650,000 † 700,000 †	375 A 550 A	(G _a = 100 V., 2.8 Ma.) (G _a = 250 V. □, 4.2 Ma.)		7A8
7AB7	Lock-in	Pentode	8B0-L-0	Cathode	6.3	0.150	.06m	3.5	4.0	R-F Amp.	250	2.0	100	4.0	1.3	500,000	1,800	7AB7
7AD7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.600	.03	11.5	7.5	Amplifier TV Amplifier	300 300	68 † 68 †	150 125	28 25	7.0 6.0	300,000	9,500	7AD7
7AF7	Lock-in	Duotriode	8AC-L-0	Cathode	6.3	0.300	2.3*	2.2*	1.6*	Amplifier (per unit)	100 100 250	0 3.0 10	10.8 5.0 9.0	6,500 8,400 7,600	2,600 1,900 2,100	17 16 16	7AF7
7AG7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.150	.005m	7.0	6.0	R-F Amp.	250	250 †	250	6.0	2.0	1.0 Meg. >	4,200	7AG7
7AH7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.150	.005m	7.0	6.5	R-F Amp.	250	250 †	250	6.8	1.9	1 Meg.	3,300	7AH7
7AJ7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.300	.007m	6.0	6.5	R-F Amp.	100 250	1.0 3.0	100 100	5.7 2.2	1.8 0.7	400,000 1.0 Meg. >	2,275 1,575	7AJ7
7AK7	Lock-in	Pentode	8V-L-0	Cathode	6.3	0.800	4.0 SutoP 0.7	12.0	9.5	R-F Amp.	150 150 150	0 11 0	90 90 90	40 2.5 Max. 2.0 Max.	21 0.45 60 Max.	11,500	6,000	7AK7
7AU7	T-6½	Duotriode	9A-0-0	Cathode	7.0 3.5I	0.300 0.600	1.5* 1.5*	1.6* 1.6*	0.4* 0.32*	Amplifier	Characteristics Same as Type 12AU7A. (7AU7 Designed for Series String TV Receivers).										7AU7
7B4	Lock-in	Triode	5AC-L-0	Cathode	6.3	0.300	1.6	3.2	3.2	Amplifier	100 250	1.0 2.0	0.4 0.9	85,000 66,000	1,150 1,500	100 100	7B4
7B5	Lock-in	Power Pent.	6AE-L-0	Cathode	6.3	0.400	0.8	7.4	8.0	Power Amp.	100 250 315	7.0 18.0 21.0	100 250 250	9.0 32.0 25.5	1.6 5.5 4.0	104,000 68,000 75,000	1,500 2,300 2,100	12,000 7,600 9,000	350 3,400 4,500	7B5

7B6	Lock-in	Duodiode Tri.	8W-L-7	Cathode	6.3	0.300	1.6	3.0	2.4	Det. Amp.	100 250	1.0 2.0	0.4 0.9	110,000 91,000	900 1,100	100 100	7B6	
7B7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.150	.004m	5.0	6.0	R-F Amp.	100 250	3.0 3.0	100 100	8.2 8.5	1.8 1.7	300,000 750,000	1,675 1,750	7B7	
7B8	Lock-in	Heptode	8X-L-0	Cathode	6.3	0.300	0.2m	10.0	9.0	Converter	100 250	1.5 3.0	50 100	1.1 3.5	1.3 2.7	600,000 360,000	360▲ 550▲	(Ga = 100 V., 2.0 Ma.) (Ga = 250 V., □, 4.0 Ma.)			7B8	
7C4	Lock-in	H. F. Diode	4AH-L-0	Cathode	6.3	0.150	Detector	Half Wave Cathode Type Rectifier for High Frequency Use.										7C4	
7C5	Lock-in	Beam Pent.	6AA-L-0	Cathode	6.3	0.450	0.4	9.5	9.0	Power Amp. Class A1	180 250 315 250 285	8.5 12.5 13.0 15.0 19.0	180 250 225 250 285	29.0 45.0 34.0 70-79† 70-92†	3.0 4.5 2.2 5-13† 4-13.5†	58,000 52,000 77,000 (Class AB1 Two Tubes)	3,700 4,100 3,750	5,500 5,000 8,500 10,000 8,000	2,000 4,500 5,500 10,000 14,000	7C5

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. # Per Tube or Section. □ Applied through 20,000 ohms.
(2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. § Plate and Target Supply Voltage. ▲ Conversion Transconductance. † Plate to Plate.
(4) Average Contact potential bias developed across specified grid resistor. ‡ Maximum Signal. ** Triode Operation. ♦ Approximate. m maximum. ■ Cathode Resistor (ohms).
X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

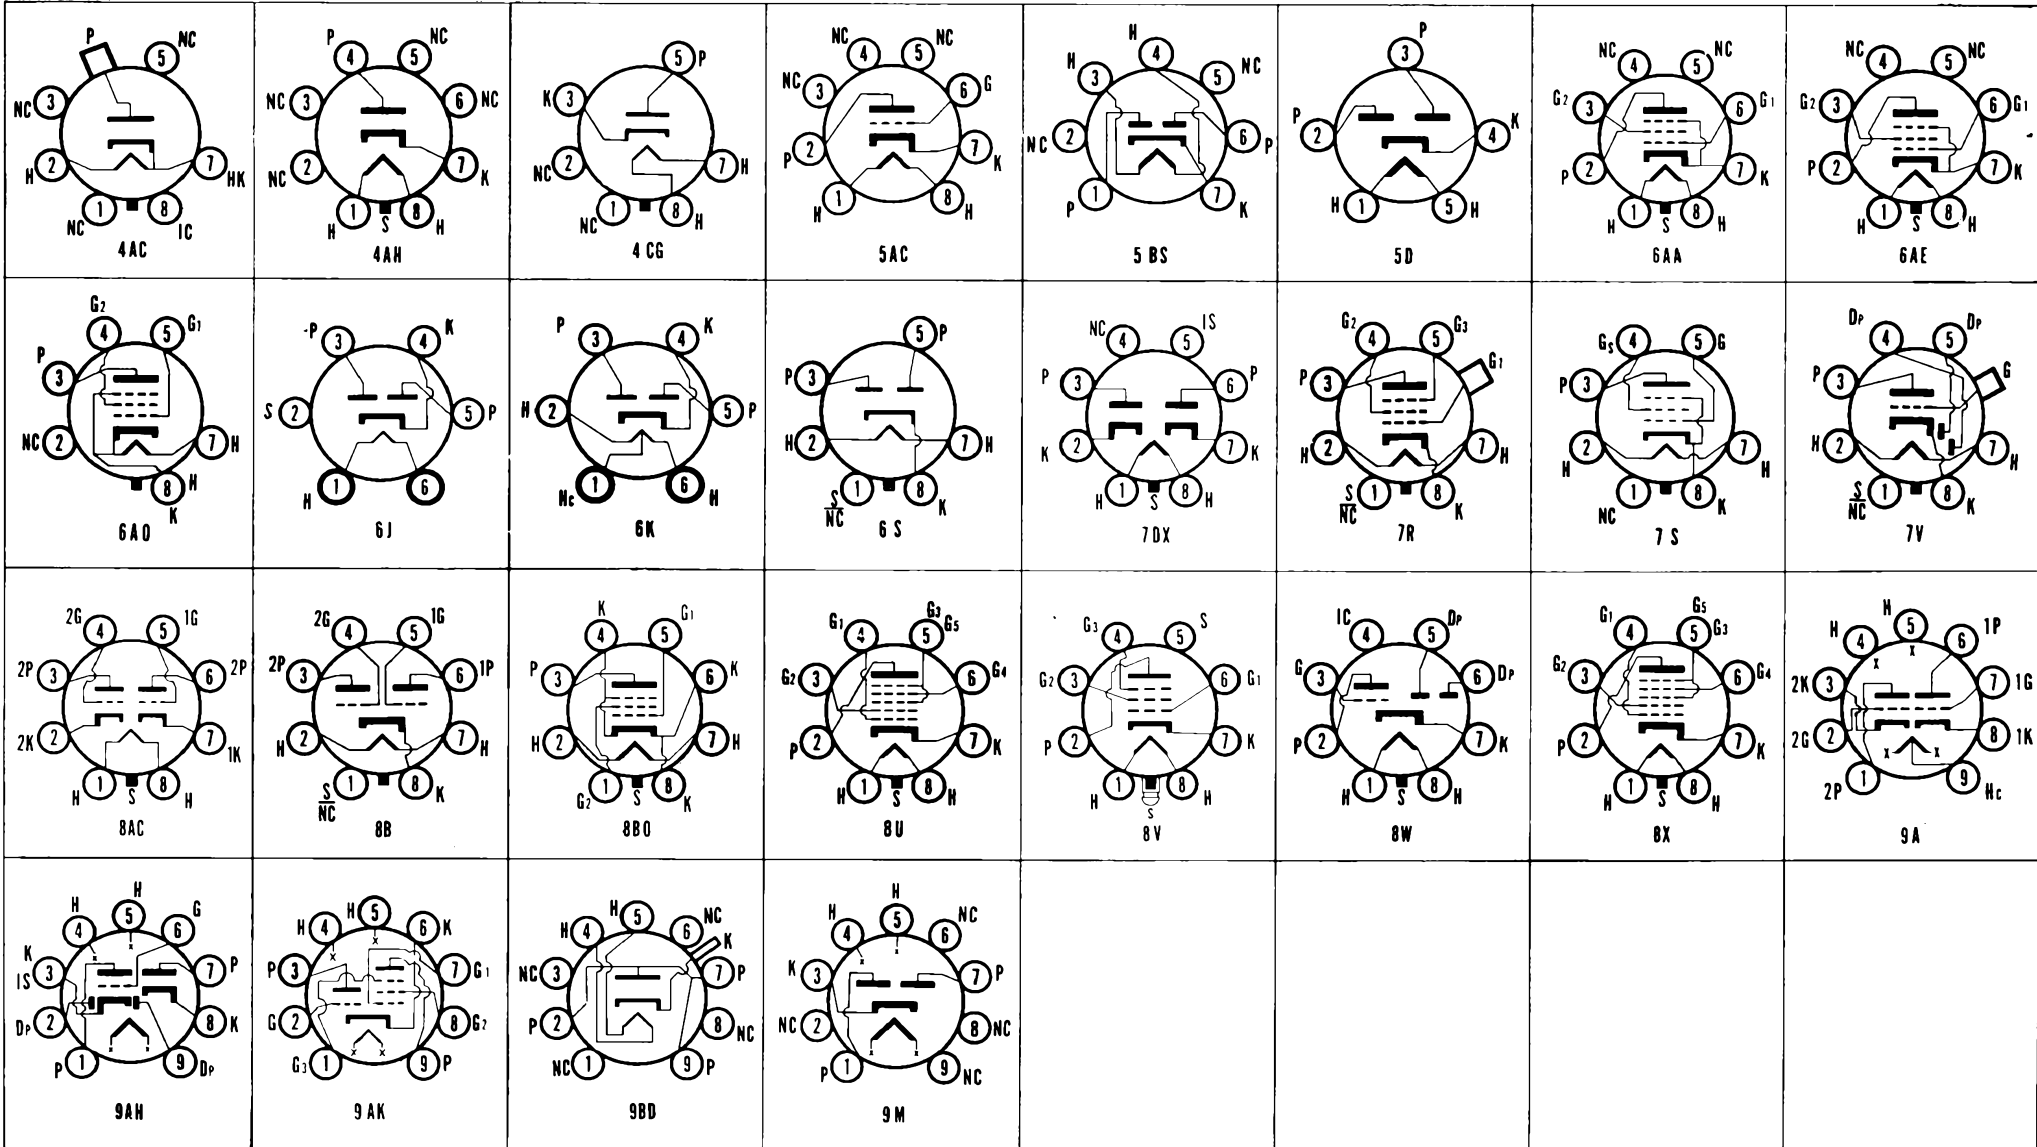


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu\text{f}$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milli-watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
7C6	Lock-in	Duodiode Tri.	8W-L-7	Cathode	6.3	0.150	1.6	2.4	2.4	Det. Amp.	100 250	0.0 1.0	1.0 1.3	100,000 100,000	850 1,000	85 100	7C6	
7C7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.150	.004m	5.5	6.5	R-F Amp.	100 250	3.0 3.0	100 100	1.8 2.0	0.4 0.5	1.2 Meg. \downarrow 2.0 Meg. \downarrow	1,925 1,300	7C7	
7E5	Lock-in	Triode	8BN-L-0	Cathode	6.3	0.150	1.5	3.6	2.8	Osc. Amp.	250 150	3.5 10.2	13.0 16.0	Oscillator for 750 mc. Service. Oscillator-Amplifier for 300 mc. Service.				200	7E5	
7E6	Lock-in	Duodiode Tri.	8W-L-7	Cathode	6.3	0.300	1.5	3.0	2.4	Det. Amp.	250 100	9.0 3.0	9.5 3.9	8,500 11,000	1,900 1,500	16 16.5	7E6	
7E7	Lock-in	Duodi. Pent.	8AE-L-7	Cathode	6.3	0.300	.005m	4.6	5.5	Det. Amp.	100 250	1.0 3.0	100 100	10.0 7.5	2.7 1.6	150,000 \downarrow 700,000 \downarrow	1,600 1,300	7E7	
7EY6	T-9	Beam Pent.	7S	Cathode	7.2I	0.600	0.7*	8.5*	7.0*	Vert. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 2,500 Volts. Maximum D.C. Cathode Current = 60 Ma. Maximum Plate Dissipation = 11 Watts.										7EY6	
7F7	Lock-in	Duotriode	8AC-L-0	Cathode	6.3	0.300	1.6	2.4	2.0	Amplifier#	100 250	1.0 2.0	0.65 2.3	62,000 \downarrow 44,000 \downarrow	1,125 1,600	70 70	7F7	
7F8	Lock-in	Duotriode	8BW-L-0	Cathode	6.3	0.300	1.7 1.7	2.8 2.8	1.4 1.4	Osc. Amp.	250	500 [#]	6.0 [#]	3,300 [#]	48	7F8	
7F8W (3)	Lock-in	Duotriode	8BW-L-0	Cathode	6.3	0.300	1.6	3.0	1.7	Osc. Amp.	250	200 [#]	11.0	5,200	50	7F8W (3)	
7G7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.450	.006m	9.0	7.0	R-F Amp.	250	2.0	100	6.0	2.0	800,000 \downarrow	4,500	7G7	
7G8	Lock-in	Duotetrode	8BV-L-0	Cathode	6.3	0.300	0.15m	3.4	2.6	R-F Amp. #	250	2.5	100	4.5	0.8	225,000	2,100	7G8	
7H7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.300	.004m	8.0	7.0	Amplifier	100 250	1.5 180 [#]	100 150	7.5 10.0	2.6 3.2	350,000 \downarrow 800,000 \downarrow	4,000 4,000	7H7	
7J7	Lock-in	Tri. Heptode	8BL-L-7	Cathode	6.3	0.300	.03m	4.6	7.5	Hep. Mixer Tri. Osc.	100 250 100 250	3.0 3.0 0.05 Meg. 0.05 Meg.	100 100	1.5 1.4 3.2 5.0	2.6 2.8 (Triode Grid Current 0.3 Ma.) (Triode Grid Current 0.4 Ma.)	500,000 290 Δ	980 Δ 290 Δ	7J7	
7K7	Lock-in	Duodiode Tri.	8BF-L-7	Cathode	6.3	0.300	1.8	2.6	3.0	Det. Amp.	250	2.0	2.3	44,000	1,600	70	7K7	
7L7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.300	.01m	8.0	6.5	R-F Amp.	100 250	1.0 1.5	100 100	5.5 4.5	2.4 1.5	100,000 \downarrow 1.0 Meg.	3,000 3,100	7L7	
7N7	Lock-in	Duotriode	8AC-L-0	Cathode	6.3	0.600	3.0 3.0	3.4 2.9	2.0 2.4	Amplifier (per unit)	90 250	0.0 8.0	10.0 9.0	6,700 7,700	3,000 2,600	20 20	7N7	
7Q7	Lock-in	Heptode	8AL-L-0	Cathode	6.3	0.300	0.15m	9.0	9.0	Converter	100 250	2.0 2.0	100 100	3.3 3.5	8.5 8.5	500,000 1.0 Meg.	525 Δ 550 Δ	(Osc. Grid Resistor 20,000) (Osc. Grid Current 0.5 Ma.)		7Q7
7R7	Lock-in	Duodi. Pent.	8AE-L-7	Cathode	6.3	0.300	.004m	5.6	5.3	Det. Amp.	100 100 250 250	2.0 1.0 2.0 1.0	100 100 100 100	3.4 5.5 3.5 5.7	1.0 2.2 1.0 2.1	500,000 \downarrow 350,000 \downarrow 1,800,000 \downarrow 1,000,000 \downarrow	2,100 3,000 2,900 3,200	7R7	
7S7	Lock-in	Tri. Heptode	8BL-L-7	Cathode	6.3	0.300	.03m	5.0	8.0	Hep. Mixer Tri. Osc.	100 250 100 250	2.0 2.0 0.05 Meg. 0.05 Meg.	100 100	1.9 1.8 3.0 5.0	3.0 3.0 (Triode Grid Current 0.3 Ma.) (Triode Grid Current 0.4 Ma.)	500,000 \downarrow 525 Δ	500 Δ 525 Δ	7S7	
7T7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.300	.005m	8.0	7.0	R-F Amp.	250 100	1.0 1.0	150 100	10.8 5.3	4.1 2.1	900,000 \downarrow 350,000 \downarrow	4,900 4,000	7T7	
7V7	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.450	.002m	9.5	6.5	R-F Amp.	300	160 [#]	150	10.0	3.9	300,000	5,800	7V7	
7W7	Lock-in	Pentode	8BJ-L-5	Cathode	6.3	0.450	.002m	9.5	7.0	R-F Amp.	Characteristics Same as Type 7V7, Except Capacitances.										7W7	
7X6	Lock-in	Duodiode	7DX-L-0	Cathode	6.3	1.200	H-W Rect. Doubler	235 Volts Per Plate, RMS, 75 Ma. DC Output Per Plate. 117 Volts Per Plate, RMS, 75 Ma. DC Output.										7X6	
7X7	Lock-in	Duodiode Tri.	8BZ-L-4	Cathode	6.3	0.300	Det. Amp.	100 250	0 1.0	1.2 1.9	85,000 67,000	1,000 1,500	85 100	7X7	
7Y4	Lock-in	Duodiode	5AB-L-0	Cathode	6.3	0.500	F-W Rect.	325 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Choke Input to Filter.										7Y4	
7Z4	Lock-in	Duodiode	5AB-L-0	Cathode	6.3	0.900	F-W Rect.	325 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Choke Input to Filter.										7Z4	
8AU8 8AU8A	T-6½	Tri. Pentode	9DX-0-6	Cathode	8.4I	0.450	2.2* .046*	2.8* 7.0*	0.32* 2.6*	Tri. Amp. Pent. Amp.	Characteristics Same as Type 6AU8. (8AU8 and 8AU8A Designed for Series String Operation). 8AU8A Characteristics Same as Type 6AU8A.										8AU8 8AU8A	
8AW8A	T-6½	Tri. Pentode	9DX-0-6	Cathode	8.4I	0.450	2.2 .03	3.4 10.0	1.7 4.5	Sync. Sep. Video Amp.	Characteristics Same as Type 6AW8A. (8AW8A Designed for Series String TV Receivers).										8AW8A	
8BA8A	T-6½	Tri. Pentode	9DX-0-0	Cathode	8.4I	0.450	2.2* .03*	2.7* 10.0*	1.9* 4.5*	Sync. Sep. Video Amp.	Characteristics Same as Type 6B8A. (8B8A Designed for Series String TV Receivers).										8BA8A	
8BH8	T-6½	Tri. Pentode	9DX-0-6	Cathode	8.4I	0.450	2.4* .046*	2.6* 7.0*	3.8* 2.4*	Tri. Amp. Pent. Amp.	Characteristics Same as Type 6BH8. (8BH8 Designed for Series String TV Receivers).										8BH8	
8BN8	T-6½	Duodiode Tri.	9ER	Cathode	8.4I	0.450	2.5*	3.6*	0.32*	Amplifier	Characteristics Same as Type 6BN8. (8BN8 Designed for Series String TV Receivers).										8BN8	
8BQ5	T-6½	Beam Pent.	9CV	Cathode	8.0I	0.600	*P.P. AB1 Amp.	Characteristics Same as Type 6BQ5. (8BQ5 Designed for Series String Receivers).										8BQ5	
8CG7	T-6½	Duotriode	9AJ-0-9	Cathode	8.4I	0.450	4.0*	2.3*	2.2*	Amplifier	Characteristics Same as Type 6CG7. (8CG7 Designed for Series String TV Receivers).										8CG7	
8CM7	T-6½	Duotriode	9ES-0-0	Cathode	8.4I	0.450	3.8* 3.0*	2.0* 3.5*	0.5* 0.4*	Vert. Osc. Vert. Defl. A.	Characteristics Same as Type 6CM7. (8CM7 Designed for Series String TV Receivers).										8CM7	
8CN7	T-6½	Duodiode Tri.	9EN-0-3	Cathode	8.4/ 4.2I	0.225/ 0.450	1.8*	1.5*	0.5*	Det. Amp.	Characteristics Same as Type 6CN7. (8CN7 Designed for Series String TV Receivers).										8CN7	
8CS7	T-6½	Duotriode	9EF-0-0	Cathode	8.4I	0.450	2.6* 2.6*	1.8* 3.0*	0.5* 0.5*	Vert. Osc. Vert. Defl. Amp.	Characteristics Same as Type 6CS7. (8CS7 Designed for Series String TV Receivers).										8CS7	

8CY7	T-6½	Duotriode	9EF	Cathode	7.9I	0.600	1.8* 4.4*	1.5* 5.0*	0.3* 1.0*	Vert. Osc. Vert. Defl. A.	Characteristics Same as Type 6CY7. (8CY7 Designed for Series String TV Receivers).						8CY7		
8EB8	T-6½	Tri. Pentode	9DX	Cathode	8.0I	0.600	4.4 0.1	2.4 11	0.36 4.2	A-F Amp. Video Amp.	Characteristics Same as Type 6EB8. (8EB8 Designed for Series String Receivers).						8EB8		
8EM5	T-6½	Beam Pent.	9HN	Cathode	8.4I	0.600	0.7* 1.5*	10* 2.5*	5.1* 1.8*	Vert. Defl. Amp.	Characteristics Same as Type 6EM5. (8EM5 Designed for Series String Operation).						8EM5		
9A8	T-6½	Tri. Pentode	9DC-0-7	Cathode	9.0	0.300	.025* 1.5*	5.5* 2.5*	3.8* 1.8*	VHF Osc. VHF Amp.	Characteristics Same as Type 6BL8.						9A8		
9AU7	T-6½	Duotriode	9A-0-0	Cathode	9.4/ 4.7I	0.225/ 0.450	1.5	1.8	2.0	Amplifier	Characteristics Same as Type 7AU7. (9AU7 Designed for Series String TV Receivers).						9AU7		
9BR8	T-6½	Tri. Pentode	9FA	Cathode	9.45	0.300	1.8 .008m	2.5 5.0	1.0 3.5	VHF Osc. VHF Amp.	150 250	56 68	110	18 10	3.5	5,000 400,000	8,500 5,200	40	9BR8

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. # Per Tube or Section. □ Applied through 20,000 ohms. † Plate to Plate. m maximum.
(2) Converter tube capacitances given are signal grid to plate, RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor. ‡ Maximum Signal. § Plate and Target Supply Voltage. ▲ Conversion Transconductance. †† Approximate. ■ Cathode Resistor (ohms).
I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

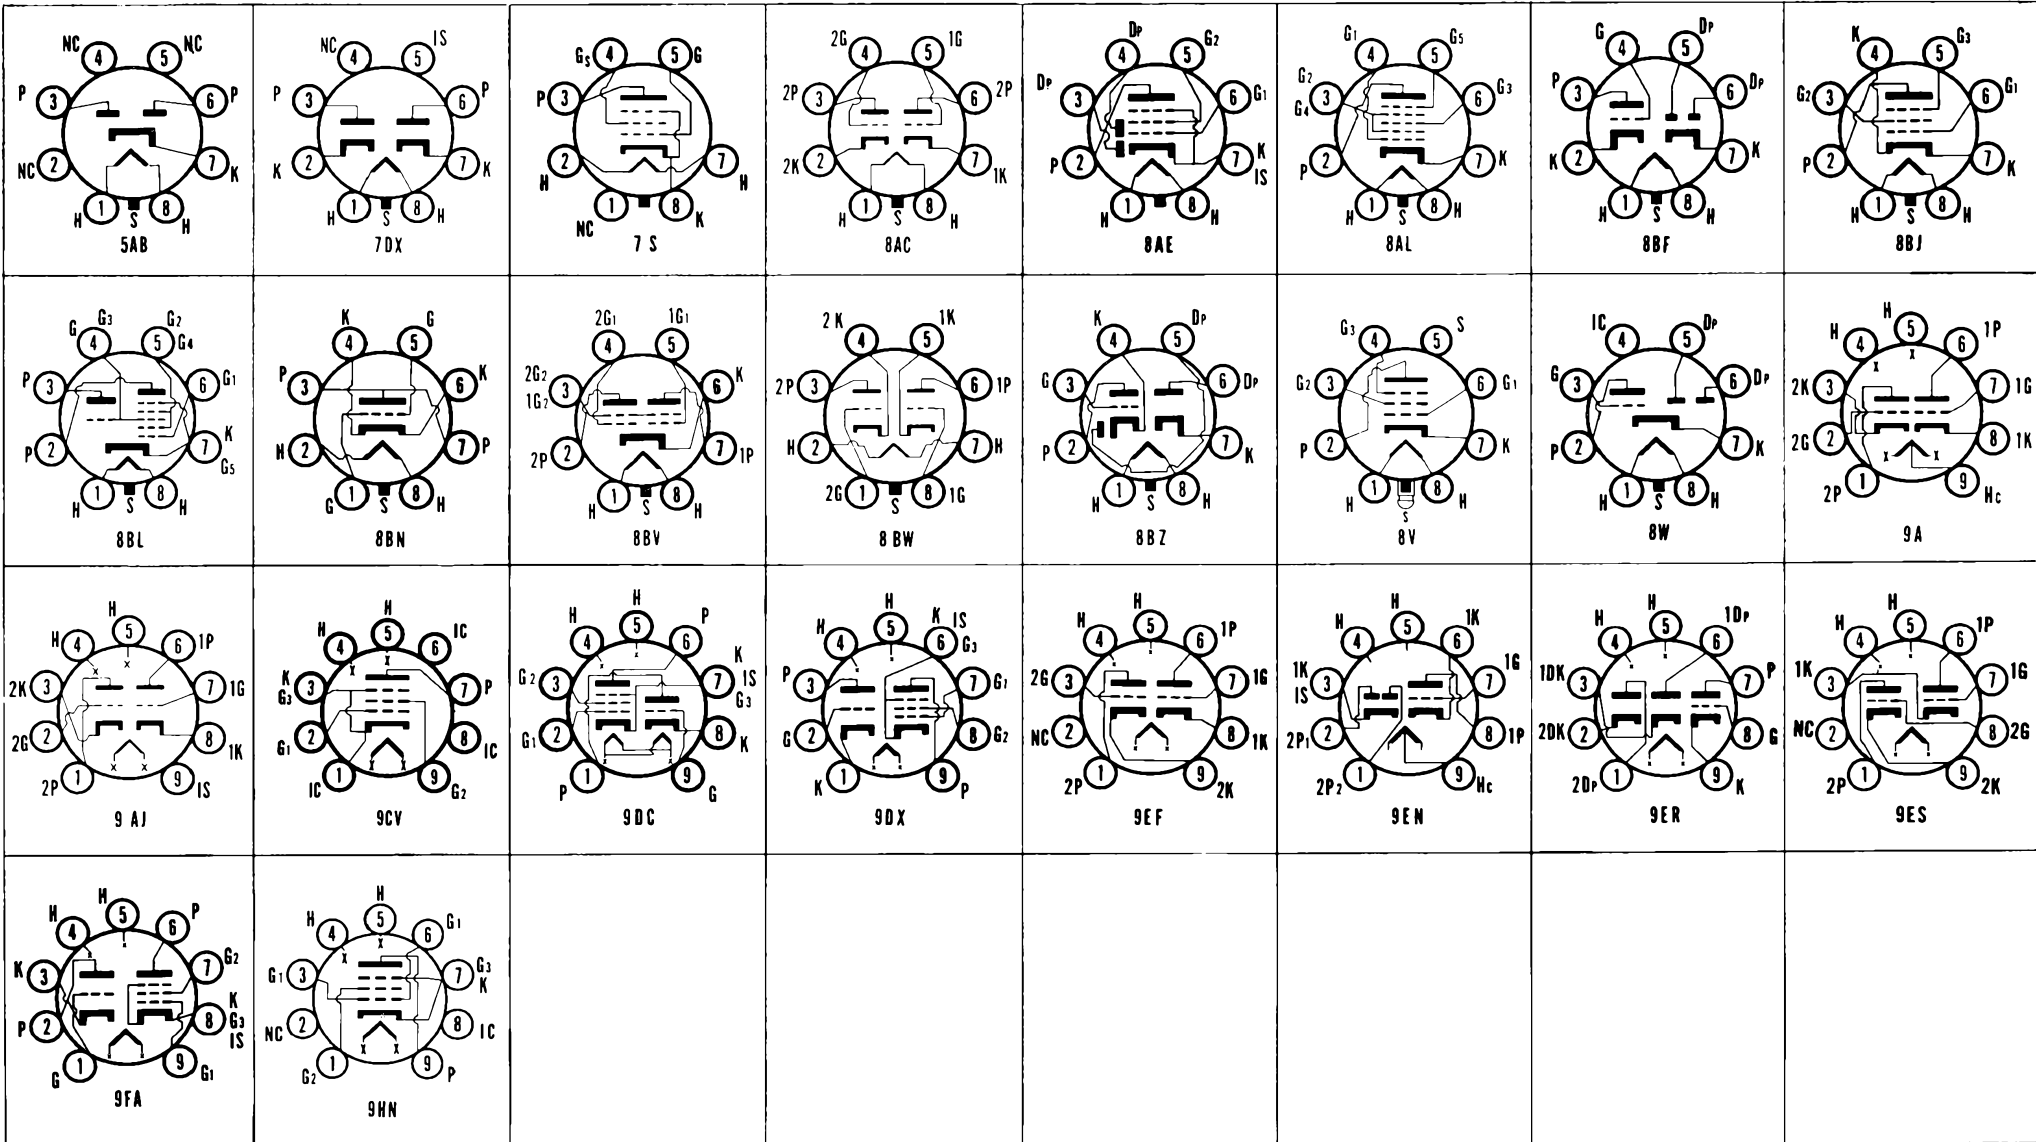


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon-ductance Micromhos	Ampli-fication Factor	Ohms Load for Stated Power Output	Power Output Milli-watts	Type
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
9CL8	T-6½	Tri. Tetrode	9FX-0-0	Cathode	9.5I	0.300	1.8 .016	2.7 5.0	1.2 3.0	VHF Osc. VHF Amp.	Characteristics Same as Type 6CL8. (9CL8 Designed for Series String TV Receivers).										9CL8
9DZ8	T-6½	Tri. Beam Pent.	6DZ8	Cathode	9.0	0.600	A-F Voltage Amp. and Power Amp.	Characteristics Same as Type 6DZ8. (9DZ8 Designed for Series String Receivers).										9DZ8
9EF6	T-9	Beam Pent.	7S	Cathode	9.4I	0.600	0.8*	11.5*	9.0*	Vert. Defl. Amp.	Characteristics Same as Type 6EF6. (9EF6 Designed for Series String TV Receivers).										9EF6
9U8A	T-6½	Tri. Pentode	9AE	Cathode	9.45I	0.300	1.8 .006	2.5 5.0	1.0 3.5	VHF Osc. VHF Amp.	Characteristics Same as Type 6U8. (9U8A Designed for Series String TV Receivers).										9U8A
9X8	T-6½	Tri. Pentode	9AK	Cathode	9.5I	0.300	1.4 .06	2.6 4.5	1.0 1.4	VHF Osc. VHF Amp.	Characteristics Same as Type 6X8. (9X8 Designed for Series String TV Receivers).										9X8
10	ST-16	Triode	4D-0-0	Filament	7.5	1.250	7.0*	4.0*	3.0*	Power Amp.	250 350 425	23.5 32.0 40.0	10.0 16.0 18.0	6,000 5,150 5,000	1,330 1,550 1,600	8.0 8.0 8.0	13,000 11,000 10,200	400 900 1,600	10
10C8	T-6½	Tri. Pentode	9DA-0-9	Cathode	10.5I	0.300	1.6* .04*	2.4* 7.0*	0.2* 2.2*	Tri. Amp. Pent. Amp.	250 135	390 [#] 100 [#] 135	7.3 11.5 3.2	12,000 190,000	4,400 8,000	53	10C8
10DA7	T-6½	Duotriode	9EF-0-0	Cathode	10.5I	0.600	2.3* 6.9*	2.0* 5.5*	0.415* 0.82*	Vert. Osc. Vert. Defl. A.	Characteristics Same as Type 6DA7. (10DA7 Designed for Series String TV Receivers).										10DA7
10DE7	T-6½	Duotriode	9HF	Cathode	9.7I	0.600	4.0* 8.5*	2.2* 5.5*	0.52* 1.0*	Vert. Osc. Vert. Defl. Amp.	Characteristics Same as Type 6DE7. (10DE7 Designed for Series String TV Receivers).										10DE7
11C5	T-5½	Beam Pent.	7CV	Cathode	11.6I	0.450	0.6*	Power Amp.	Characteristics Same as Type 35C5. (11C5 Designed for Series String TV Receivers).										11C5
11CY7	T-6½	Duotriode	9EF	Cathode	11I	0.450	1.8* 4.4*	1.5* 5.0*	0.3* 1.0*	Vert. Osc. Vert. Defl. A.	Characteristics Same as Type 6CY7. (11CY7 Designed for Series String TV Receivers).										11CY7
12A	ST-14	Triode	4D-0-0	Filament	5.0	0.250	8.5*	4.0*	2.0*	Det. Amp.	180	13.5	7.7	4,700	1,800	8.5	10,650	285	12A
12A4	T-6½	Triode	9AG-0-0	Cathode	6.3 12.6	0.600 0.300	5.6*	4.9*	0.9*	Amplifier	250	9.0	23	2,500	8,000	20	12A4
12A5	ST-12 T-9	Beam Pent.	7E-0-0	Cathode	12.6 6.3	0.300 0.600	0.3	9.0	9.0	Power Amp.	100 180	15.0 25.0	100 180	17.0 45.0	3.0 8.0	50,000 [#] 35,000 [#]	1,700 2,400	4,500 3,300	800 3,400	12A5
12A6 12A6GT	Metal T-9	Beam Pent.	7S-1-0 7S-0-0	Cathode	12.6	0.150	Power Amp.	250	12.5	250	30	3.5	70,000	3,000	7,500	3,400	12A6 12A6GT
12A7	ST-12	Diode Pent.	7K-0-0	Cathode	12.6	0.300	H-W Rect. Power Amp.	125 RMS 135	13.5 135	30.0 Max. 9.0 2.5	13,500	550	12A7
12A8G 12A8GT	T-12 T-9	Heptode	8A-1-0	Cathode	12.6	0.150	0.26	9.5	12.0	Converter	Characteristics Same as Type 6A8G.										12A8G 12A8GT
12AC6	T-5½	Pentode	7BK	Cathode	12.6	0.150	.004	4.3	5.0	R-F Amp.	12.6	0	12.6	550 $\mu\text{a.}$	200 $\mu\text{a.}$	0.5 Meg.	730	12AC6
12AD5	T-6½	Pentode	9AZ	Cathode	12.6	0.100	.002m*	5.1	8.1	R-F Amp.	100	2.5	100	6.0	1.75	600,000 [#]	2,200	12AD5
12AD6	T-5½	Heptode	7CH	Cathode	12.6	0.150	0.25m	8.0	13	Hep. Mixer	12.6	1.6	12.6	450 $\mu\text{a.}$	1.5	260 Δ	12AD6
12AD7	T-6½	Duotriode	9A	Cathode	12.6/ 6.3	0.225/ 0.450	1.8 1.8	1.7 1.7	1.6 1.9	Amplifier #	250	2	1.25	62,500	1,600	100	12AD7
12AE6	T-5½	Duodiode Tri.	7DT	Cathode	12.6	0.150	2.0	1.8	1.1	Class A1 Amp.	12.6	0	0.75	15,000	1,000	15	12AE6
12AF3	T-6½	Diode	9CB	Cathode	12.6I	0.600	T.V. Damper	Characteristics Same as Type 6AF3. (12AF3 Designed for Series String Receivers).										12AF3
12AF6	T-5½	Pentode	7BK-0-2	Cathode	12.6	0.150	.006*	5.5*	4.8*	R-F Amp.	12.6	0	12.6	1.1	0.45	0.35 Meg.	1,500	12AF6
12AG6	T-5½	Heptode	7CH	Cathode	12.6	0.150	.065m*	5.5*	7.5*	Converter	12.6	0.85	12.6	0.55	1.4	300 Δ	G1 = 20,000 Ohms; G1 = 0.050 Ma.		12AG6
12AH7GT	T-9	Duotriode	8BE-0-0	Cathode	12.6	0.150	3.0 2.2	2.8 3.2	2.6 3.0	Amplifier (per unit)	100 180	3.6 6.5	3.7 7.6	10,300 8,400	1,550 1,900	16 16	12AH7GT
12AJ6	T-5½	Duodiode Tri.	7DT	Cathode	12.6	0.150	2.0*	2.2*	0.8*	Det. Amp.	12.6	0075	45,000	1,200	55	12AJ6
12AL5	T-5½	Duodiode	6BT-0-6	Cathode	12.6	0.150	Detector	Characteristics Same as Type 6AL5.										12AL5
12AL8	T-6½	Tri. Tetrode	9GS	Cathode	12.6	0.550	5.7* 14.0*	1.8* 13.0*	0.4* 1.6*	Tri. Amp. Tel. Amp.	12.6	0.9 [#] 12.6	0.5 40 75	13,000 480	1,000 15,000	13	12AL8
12AQ5	T-5½	Beam Pent.	7BZ-0-0	Cathode	12.6	0.225	0.35*	8.3*	8.2*	Power Amp.	Characteristics Same as Type 6AQ5.										12AQ5
12AT6	T-5½	Duodiode Tri.	7BT-0-0	Cathode	12.6	0.150	2.1*	2.2*	1.1*	Det. Amp.	Characteristics Same as Type 6AT6.										12AT6
12AT7	T-6½	Duotriode	9A-0-0	Cathode	6.3 12.6	0.300 0.150	1.45* 1.45*	2.5* 2.5*	0.45* 0.35*	Amplifier	100 250	270 [#] 200 [#]	3.7 10.0 5,500	4,000	60 60	12AT7
12AU6	T-5½	Pentode	7BK-0-2	Cathode	12.6	0.150	.0035m*	5.5*	5.0*	R-F Amp.	Characteristics Same as Type 6AU6.										12AU6
12AU7 12AU7A	T-6½	Duotriode	9A-0-0	Cathode	12.6 6.3	0.150 0.300	1.5* 1.5*	1.6* 1.6*	0.4* 0.32*	Amplifier	250 100	8.5 0	10.5 11.8	7,700 6,500	2,200 3,100	17 20	12AU7 12AU7A
12AV5GA	T-11 or T-12	Beam Pent.	6CK-0-0	Cathode	12.6I	0.600	0.5*	14.0*	7.0*	Horizontal Defl. Amp.	Characteristics Same as Type 6AV5GA. (12AV5GA Designed for Series String TV Receivers).										12AV5GA
12AV6	T-5½	Duodiode Tri.	7BT-0-0	Cathode	12.6	0.150	2.1*	2.5*	0.9*	Det. Amp.	Characteristics Same as Type 6AV6.										12AV6
12AV7	T-6½	Duotriode	9A-0-0	Cathode	12.6 6.3	0.225 0.450	1.7 1.7	1.8 1.8	1.9 1.9	Amplifier	100 150	120 [#] 56 [#]	9.0 18	6,100 4,800	6,100 8,500	37 41	12AV7
12AW6	T-5½	Pentode	7CM-0-7	Cathode	12.6	0.150	.025m*	6.5*	1.5*	R-F Amp.	250 125 100	200 [#] 100 [#] 100 [#]	150 125 100	7.0 7.2 5.5	2.0 2.1 1.6	0.8 Meg. 0.5 Meg. 0.3 Meg.	5,000 5,100 4,750	12AW6
12AX4GT 12AX4GTA	T-9	Diode	4CG-0-0	Cathode	12.6 12.6I	0.600 0.600	T.V. Damper	P.I.V. = 4,400 Volts Max., D-C Plate Current = 125 Ma. Max. (12AX4GTA Designed for Series String TV Receivers).										12AX4GT 12AX4GTA

12AX7	T-6½	Duotriode	9A-0-0	Cathode	12.6 6.3	0.150 0.300	1.7* 1.7*	1.6* 1.6*	0.46* 0.34*	Amplifier#	100 250	1 2	0.5 1.2	80,000 62,500	1,250 1,600	100 100	12AX7
12AX7A	T-6½	Duotriode	9A	Cathode	12.6 6.3	0.150 0.300	1.7* 1.7*	1.6* 1.6*	0.46* 0.34*	Audio Amplifier	Low Noise and Low Microphoism Version of Identical Type 12AX7.										12AX7A
12AY7	T-6½	Duotriode	9A-0-0	Cathode	12.6	0.150	1.3*	1.3*	0.6*	Audio Amp.#	250	4.0	3.0	1,750	40	12AY7
12AZ7	T-6½	Duotriode	9A-0-0	Cathode	6.3 12.6	0.450 0.225	1.9 1.9	2.8 2.8	1.2 1.6	Amplifier	100 250	270 200	3.7 10.0	15,000 10,900	4,000 5,500	60 60	12AZ7
12B3	T-6½	Diode	9BD-0-0	Cathode	12.6†	0.600	T.V. Damprr	Characteristics Same as Type 6B3. (12B3 Designed for Series String TV Receivers).										12B3
12B4	T-6½	Triode	9AG-0-0	Cathode	6.3†/12.6	0.600/0.300	4.0	6.2	4.2	Vert. Defl. Amp.	Max. Peak Pos. Pulse Plate Voltage = 1,000 Volts Max. D.C. Cathode Current = 30 Ma. Max. Plate Dissipation = 6 Watts. (12B4A Designed for Series String TV Receivers).										12B4A
12B4A	T-6½	Triode	9AG-0-0	Cathode	6.3†/12.6	0.600/0.300	4.0	6.2	4.2	Vert. Defl. Amp.	150	17.5	35	6,500	6.5	12B4

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. # Per Tube or Section. □ Applied through 20,000 ohms. † Plate to Plate. m maximum.
 (2) Converter tube capacitances given are signal grid to plate; RF input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor. § Plate and Target Supply Voltage. ‡ Conversion Transconductance. †† Approximate. ▣ Cathode Resistor (ohms).
 † Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

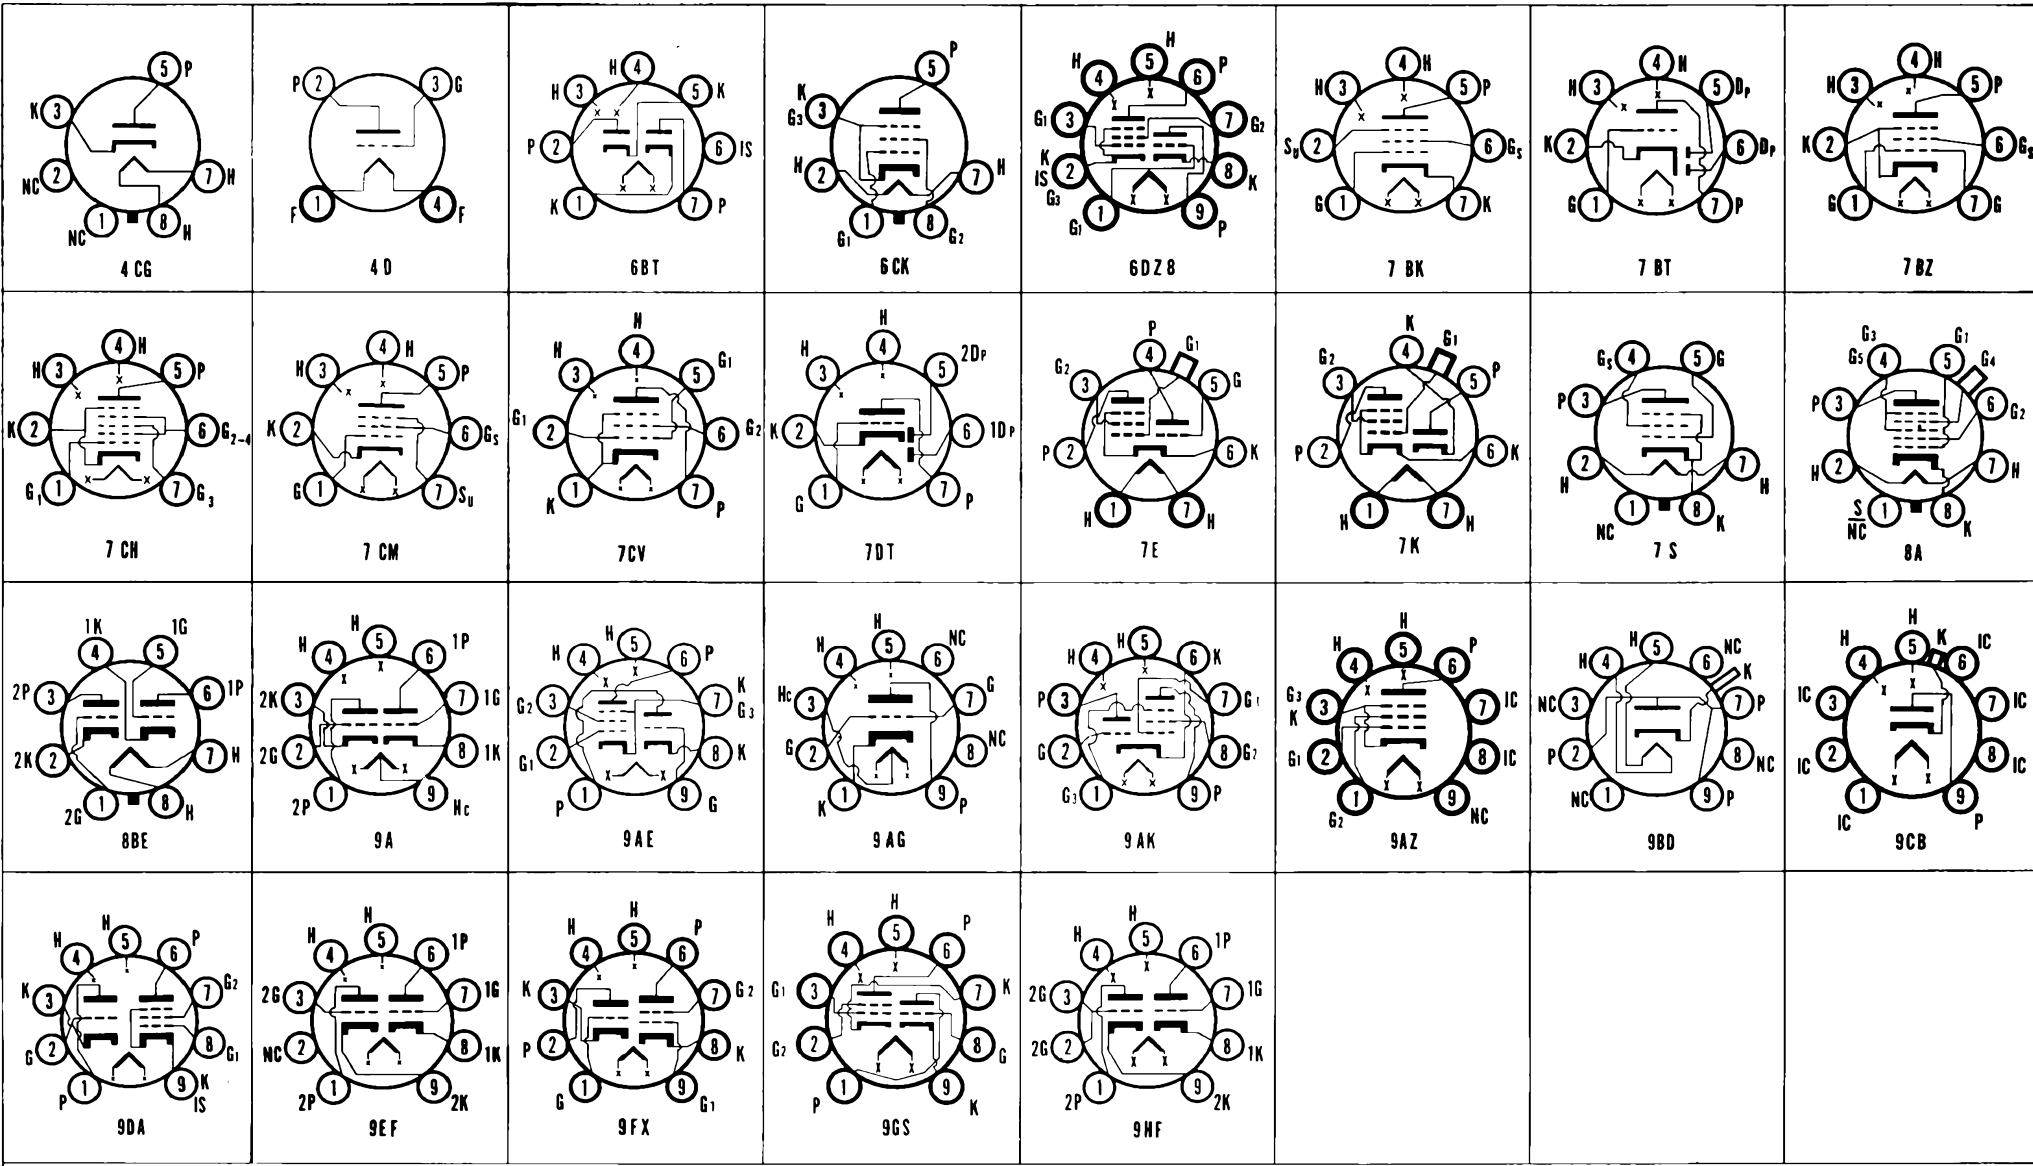


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ▣—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Stated Power Output	Power Output Milli- watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cln.	Cout													
12B7	Now Known as Type 14A7																				12B7	
12B8GT	T-9	Pentode Tri.	8T-0-1	Cathode	12.6	0.300	.015* 2.3	5.9* 5.0	9.6* 6.3	Pent. Amp. Tri. Amp.	90 90	3.0 0	90	7.0 2.8	2.0	900,000 35,000	1,800 2,400 90	(Pentode Section) (Triode Section)	12B8GT		
12BA6	T-5½	Pentode	7BK-0-0	Cathode	12.6	0.150	.0035*	5.5*	5.5*	R-F Amp.	Characteristics Same as Type 6BA6.										12BA6	
12BA7	T-6½	Heptode	8CT-0-6A8	Cathode	12.6	0.150	0.19m	9.5	8.3	Converter	Characteristics Same as Type 6BA7.										12BA7	
12BD6	T-5½	Pentode	7BK-0-2	Cathode	12.6	0.150	.004	4.3	5.0	R-F Amp.	Characteristics Same as Type 6BD6.										12BD6	
12BE6	T-5½	Heptode	7CH-0-0	Cathode	12.6	0.150	0.3*	7.0*	8.0*	Converter	Characteristics Same as Type 6BE6.										12BE6	
12BF6	T-5½	Duodiode Tri.	7BT-0-0	Cathode	12.6	0.150	1.9*	1.9*	1.2*	Det. Amp.	250	9.0	9.5	8,500	1,900	16	10,000	300	12BF6	
12BH7 12BH7A	T-6½	Duotriode	9A-0-0	Cathode	6.3I/ 12.6	0.600/ 0.300	2.4 2.4	3.0 3.0	2.0 2.0	Vert. Defl. Amp.	Max Peak Pos. Pulse Plate Voltage = 1,500 Volts Max. D.C. Cathode Current = 20 Ma. Max. Plate Dissipation = 3.5 Watts. (12BH7A Designed for Series String TV Receivers).										12BH7A	
12BK5	T-6½	Beam Amp.	9BQ-0-0	Cathode	12.6I	0.600	0.6*	13.0*	5.0*	Power Amp.	Characteristics Same as Type 6BK5. (12BK5 Designed for Series String TV Receivers).										12BK5	
12BK6	T-5½	Duodiode Tri.	7BT-0-2	Cathode	12.6	0.150	Det. Amp.	100 250	1.0 2.0	0.5 1.2	80,000 62,000	1,250 1,600	100 100	12BK6	
12BL6	T-5½	Pentode	7BK	Cathode	12.6	0.150	.006	5.5	4.8	R-F Amp.	12.6	0.65'	12.6	1.35	0.5	500,000 †	1,350	12BL6	
12BN6	T-5½	Gated Beam	7DF-0-1	Cathode	12.6	0.150	Quad. F. M. Def.	Characteristics Same as Type 6BN6.										12BN6	
12BQ6GA 12BQ6GTA	T-11 T-9	Beam Pent.	6AM-0-0	Cathode	12.6I	0.600	0.8*	14.0*	6.5*	Horiz. Defl. Amp.	Characteristics Same as Type 6BQ6GA. (12BQ6GA and 12BQ6GTA Designed for Series String TV Receivers)										12BQ6GA 12BQ6GTA	
12BQ6GTB	T-9	Beam Pent.	6AM-0-0	Cathode	12.6I	0.600	0.6*	15.0*	7.5*	Horiz. Amp.	Characteristics Same as Type 6BQ6GTB. (12BQ6GTB Designed for Series String TV Receivers).										12BQ6GTB	
12BR7	T-6½	Duodiode Tri.	9CF	Cathode	12.6I	0.600	0.63 0.450	1.9	2.8	1.0	Amplifier	100 250	270 # 200 #	3.7 10.0	15,000 10,900	4,000 5,500	60 60	12BR7
12BT6	T-5½	Duodiode Tri.	7BT-0-2	Cathode	12.6	0.150	Det. Amp.	100 250	1.0 3.0	0.8 1.0	54,000 58,000	1,300 1,200	70 70	12BT6	
12BU6	T-5½	Duodiode Tri.	7BT-0-2	Cathode	12.6	0.150	Det. Amp.	250 100	3.0 9.0	3.9 9.5	11,000 8,500	1,500 1,900	16.5 16	10,000	300	12BU6	
12BV7	T-6½	Pentode	9BF-0-3A9	Cathode	12.6I 6.3	0.300/ 0.600	.055*	11.0*	3.0*	Class A1 Amplifier	250	68 #	150	27	6.0	85,000	13,000	10,000	12BV7	
12BW4	T-6½	Duodiode	9DJ	Cathode	12.6	0.450	F-W Rect.	Characteristics Same as Type 6BW4.										12BW4	
12BY7	T-6½	Pentode	9BF-0-3A4	Cathode	6.3 12.6	0.600 0.300	.063*	10.2*	3.5*	Video Amp.	250	100 #	180	26	5.75	93,000	11,000	1,035	12BY7	
12BZ7	T-6½	Duotriode	9A-0-0	Cathode	6.3/ 12.6	0.600/ 0.300	0.45	6.5	Sync Sep. or Amplifier #	250	2	2.5	31,800	3,200	100	Cout Sec. 1 = 0.7 μf	12BZ7	
12C5	T-5½	Beam Pent.	7CV-0-0	Cathode	12.6I	0.600	0.6*	13.0*	8.5*	Power Amp.	120	8	110	49	4.0	10,000	7,500	2,500	2,300	12C5	
12C8	Metal	Duodi. Pent.	8E-1-1	Cathode	12.6	0.150	.005m	6.0	9.0	Det. Amp.	Characteristics Same as Type 6C8.										12C8	
12CA5	T-5½	Beam Pent.	7CV-0-0	Cathode	12.6I	0.600	0.5*	15.0*	9.0*	Power Amp.	Characteristics Same as Type 6CA5. (12CA5 Designed for Series String TV Receivers).										12CA5	
12CM6	T-6½	Beam Pent.	9CK-0-0	Cathode	12.6	0.225	0.7*	8.0*	8.5*	Power Amp.	Characteristics Same as Type 6CM6.										12CM6	
12CN5	T-5½	Pentode	7CV	Cathode	12.6	0.450	.02	I-F Amp.	12.6	2.2Meg. †	12.6	4.5	0.35	40,000 †	3,800	12CN5	
12CR5	T-6½	Beam Pent.	9HC-0-0	Cathode	12.6I	0.600	0.32*	12.9*	6.9*	Horiz. Defl. Amp.	Characteristics Same as Type 6CR5. (12CR5 Designed for Series String TV Receivers).										12CR5	
12CR6	T-5½	Diode Pent.	7EA	Cathode	12.6	0.150	Audio Amp.	250	2	100	9.6	2.6	800,000	2,200	12CR6	
12CS5	T-6½	Beam Pent.	9CK	Cathode	12.6I	0.600	15.0	Power Amp.	Characteristics Same as Type 6CS5. (12CS5 Designed for Series String TV Receivers).										12CS5	
12CS6	T-5½	Dual Control Heptode	7CH-0-0	Cathode	12.6	0.150	.05m 0.36m	5.5 7.0	7.5	Sync. Sep.	100 100	0.0Gr.#1 1.0Gr.#1	30 30	0.8 0.75	4.0 1.1	700,000 1.0 Meg.	950 Gr. #1 1250 Gr. #3	Grid #3 Volts = 0 Grid #3 Volts = 1.0	12CS6
12CT8	T-6½	Tri. Pentode	9DA-0-9	Cathode	12.6I	0.300	2.2* .044*	2.4* 7.5*	0.19* 2.4*	Sync. Amp. Video Amp.	150 200	150 # 82 # 125	9.0 15.0 3.4	8,200 150,000	4,900 7,000	40	12CT8
12CU5	T-5½	Beam Pent.	7CV	Cathode	12.6I	0.600	0.6*	13*	8.5*	Power Amp.	Characteristics Same as Type 6CU5. (12CU5 Designed for Series String TV Receivers.)										12CU5	
12CU6	T-12	Beam Pent.	6AM-0-0	Cathode	12.6I	0.600	0.55*	15.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6BQ6G, Except Max. D.C. Plate Supply = 550 Volts. (12CU6 Designed for Series String TV Receivers).										12CU6	
12CX6	T-5½	Pentode	7BK	Cathode	12.6	0.150	.05*	7.6*	6.2*	R-F Amp.	12.6	2.2Meg. †	12.6	3.0	1.4	40,000	3,100	12CX6	
12CY6	T-5½	Pentode	7BK	Cathode	12.6	0.200	0.18*	8.5*	4.0*	R-F Amp.	12.6	2.2Meg. †	12.6	1.6	0.4	140,000	3,250	12CY6	
12D4	T-9	Diode	4CG-0-0	Cathode	12.6I	0.600	T.V. Damper	Maximum Inverse Peak Plate Voltage = 4,400 Volts. Maximum D.C. Plate Current = 155 Ma.										12D4	
12DB5	T-6½	Beam Pent.	9GR-0-0	Cathode	12.6I	0.600	0.2	1.3	8.0	Vert. Defl. Amp.	Characteristics Same as Type 6DB5. (12DB5 Designed for Series String TV Receivers).										12DB5	
12DE8	T-6½	Diode Pent.	12DE8	Cathode	12.6	0.200	.006*	5.5*	5.7*	R-F or I-F Amplifier	12.6	0.8'	12.6	1.3	0.5	300,000 †	1,500	12DE8	
12DF5	T-6½	Duodiode	9BS	Cathode	12.6 6.3	0.450 0.900	F-W Rect.	325 A.V. Volts Per Plate, RMS, 100 Ma. Output Current. Condenser Input. 450 A.C. Volts Per Plate, RMS, 100 Ma. Output Current. Choke Input.										12DF5	
12DF7	T-6½	Duotriode	9A	Cathode	12.6 6.3	0.150 0.300	1.4* 1.4*	1.6* 1.6*	0.4* 0.3*	Audio Amp.	Characteristics Same as Type 12AX7. (Special Low Noise).										12DF7	
12DK5	T-6½	Pentode	9GT	Cathode	12.6	0.300	.045	9.5	2.65	R-F Amp.	12.6	2.2Meg. †	12.6	2.0	0.65	100,000	3,300	12DK5	
12DK7	T-6½	Duodiode Tetode	9HZ	Cathode	12.6	0.500	Det. Power Amp. Driver	12.6	15 Meg. †	12.6	6.0	1.0	4,000	5,000	3,500	10	12DK7	
12DL8	T-6½	Duodiode Tetode	9HR	Cathode	12.6	0.550	14*	12*	1.3*	Det. Power Amp. Driver	12.6	G2=2 G1=12.6	8	75	480	15,000	800	40	12DL8	
12DM5	T-5½	Beam Pent.	7CV	Cathode	12.6I	0.450	0.55*	13.0*	9.0*	Power Amp.	110	7.5	110	49.0	4.0	14,000	7,500	2,500	1,900	12DM5	

12DQ6	T-12	Beam Pent.	6AM-0-0	Cathode	12.6I	0.600	0.55*	15.0*	7.0*	Horiz. Def. Amp.	Characteristics Same as Type 6DQ6. (12DQ6 Designed for Series String TV Receivers.)										12DQ6					
12DQ6A	T-12	Beam Pent.	6AM	Cathode	12.6I	0.600	0.55*	15.0*	7.0*	Horiz. Def. Amp.	Characteristics Same as Type 6DQ6A. (12DQ6A Designed for Series String TV Receivers.)										12DQ6A					
12DQ7	T-6½	Pentode	9BF	Cathode	12.6/ 6.3I	0.300 0.600	0.1*	10*	3.8*	Video Amp.	200	68 ^m	125	26	5.6	53,000	10,500	12DQ7					
12DS7	T-6½	Duodiode Tetrode	9JU	Cathode	12.6	0.400	12.5*	13*	2*	Def. Power Amp. Driver	12.6	2.2 Meg [†]	G1=12.6	40-8†	75	800	40	12DS7					
											(1) Values are given shielded unless marked with (*).					(2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output.										
											(3) Has special mechanical and/or life characteristics.					(4) Average Contact potential bias developed across specified grid resistor.										
											# Per Tube or Section.				‡ Applied through 20,000 ohms.				†† Plate to Plate.				m maximum.			
											§ Plate and Target Supply Voltage.				† Conversion Transconductance.				‡‡ Approximate.				■ Cathode Resistor (ohms).			
											† Maximum Signal.				** Triode Operation.											
I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)																										

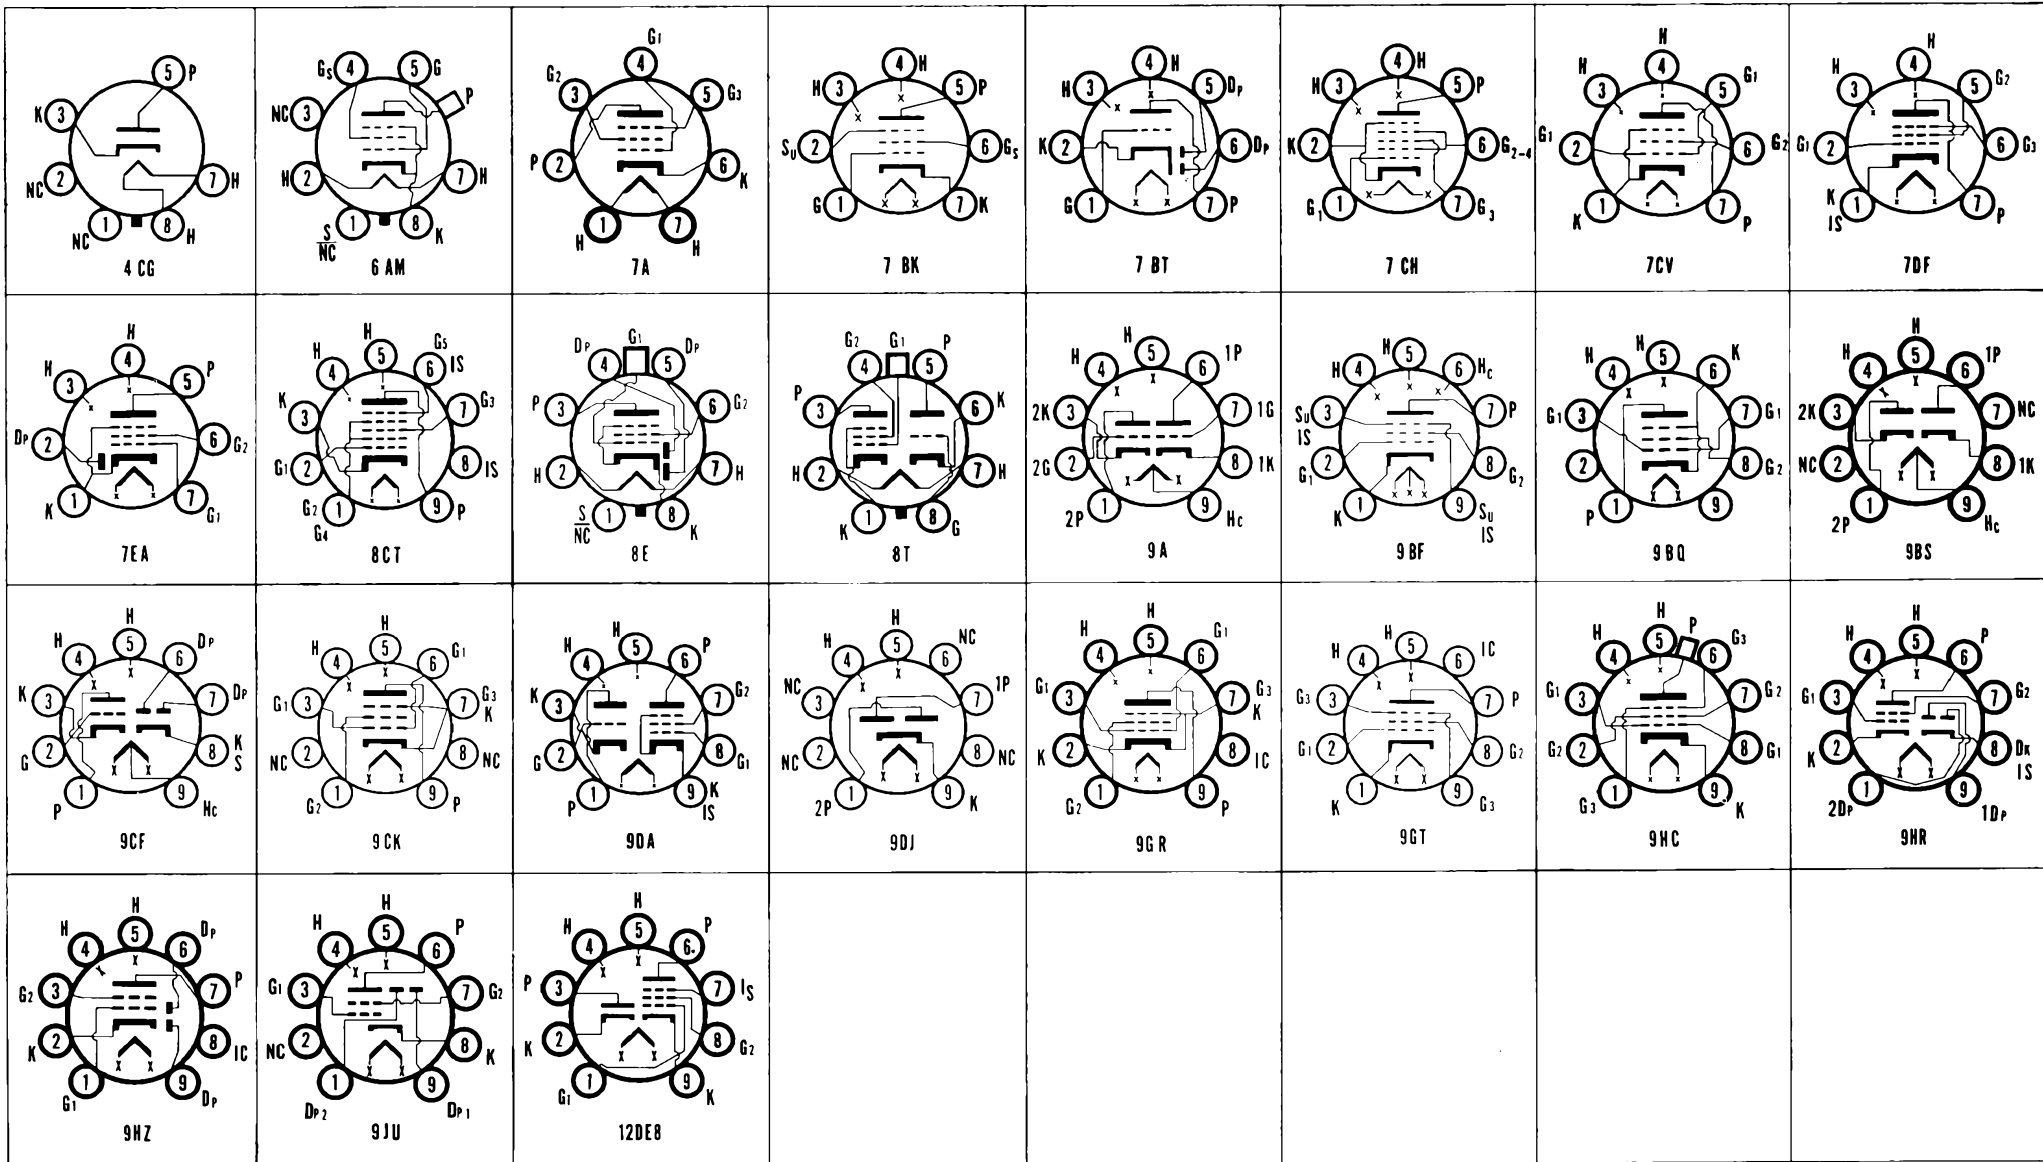

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milliwatts	Type
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
12DT5	T-6½	Beam Pent.	9HN	Cathode	12.6I	0.600	0.57*	12.5*	4.9*	Vert. Defl. Amp.	Characteristics Same as Type 6DT5. (12DT5 Designed for Series String TV Receivers).										12DT5
12DT8	T-6½	Duotriode	9DE	Cathode	12.6	0.150	1.6	2.7	1.6	Amplifier	100 250	270 200	3.7 10	15,000 10,900	4,000 5,500	60 60	12DT8
12DU7	T-6½	Duodiode Tetrode	9JX	Cathode	12.6	0.275	0.6*	11*	3.6*	Det. Power Amp. Driver	12.6	2.2 Meg ¹	12.6	12	1.5	6,000	6,200	2,700	25	12DU7
12DV7	T-6½	Duodiode Tri.	9JY	Cathode	12.6	0.150	1.6*	1.3*	0.38*	Det. Amp.	12.6	2.2 Meg ¹	0.4	19,000	750	14	12DV7
12DV8	T-6½	Duodiode Tetrode	9HR	Cathode	12.6	0.375	12*	9*	1.0*	Detector, Power Amp. Driver	12.6	18 Ohm ¹ and 4.7 Meg ¹	G1=12.6	6.8	54	900 (Space Charge Grid Operation).	8,500	7.6	1,250	5	12DV8
12DW5	T-6½	Beam Pent.	9CK	Cathode	12.6I	0.600	0.5	14	9	Vert. Defl. Amp.	Maximum Peak Positive Plate Voltage = 2,200 Volts. Maximum D.C. Cathode Current = 65 Ma. Maximum Plate Dissipation = 11 Watts. 200 22.5 150 55										12DW5
12DZ6	T-6½	Pentode	7BK	Cathode	12.6	0.190	0.15m*	9.5*	4.0*	R-F Amp.	12.6	G1=10meg. ¹ G3=0	12.6	4.5	2.2	25,000	3,800	12DZ6
12DZ8	T-6½	Tri. Beam Pent.	6DZ8	Cathode	12	0.450	A-F Voltage Amp. and Power Amp.	Characteristics Same as Type 6DZ8. (12DZ8 Designed for Series String Receivers).										12DZ8
12E5GT	T-9	Triode	6Q-1-0	Cathode	12.6	0.150	2.6	3.4	5.5	Amplifier	100 250	5.0 13.5	2.5 5.0	12,000 9,500	1,150 1,450	13.8 13.8	12E5GT
12EA6	T-5½	Pentode	7BK	Cathode	12.6	0.190	.04m*	11*	4*	I-F Amp.	12.6	G1=10meg. ¹ G3=0	12.6	3.2	1.4	32,000	3,800	12EA6
12EC8	T-6½	Tri. Pentode	9FA	Cathode	12.6	0.225	1.7 .02	2.6 4.6	0.4 2.6	FM Osc. FM Amp.	12.6 12.6	0 0 12.6	2.4 0.66 0.28	6,000 750,000	4,700 2,000	25	12EC8
12ED5	T-5½	Pentode	7CV	Cathode	12.6	0.450	0.26	14	8.5	S.T.A1 Amp.	110 125	4.0 4.5	110 125	32 37	4 7	14,000 14,000	8,100 8,500	4,500 1,100	1,100 1,500	12ED5
12EF6	T-9	Beam Pent.	7S	Cathode	12.6I	0.450	0.8*	11.5*	9.0*	Vert. Defl. Amp.	Characteristics Same as Type 6EF6. (12EF6 Designed for Series String TV Receivers).										12EF6
12EG6	T-5½	Heptode	7CH	Cathode	12.6	0.150	0.25	6.5	12	Mixer Oscillator	12.6	0.8 ¹	12.6	.04	0.24	150,000	800	12EG6
12EH5	T-5½	Beam Pent.	7CV	Cathode	12.6I	0.600	0.65*	17*	9*	S.T. A1 Amp.	Characteristics Same as Type 6EH5. (12EH5 Designed for Series String Receivers).										12EH5
12EK6	T-5½	Pentode	7BK	Cathode	12.6	0.190	.032	10	5.5	FM Amp.	12.6	2.2 ¹	12.6	4.4	2	40,000	4,200	12EK6
12EL6	T-5½	Duodiode Tri.	7FB	Cathode	12.6	0.150	1.8*	2.2*	1.0*	Detector	12.6	1.0Meg. ¹75	45,000	1,200	55	12EL6
12EM6	T-6½	Diode Tetrode	9HV	Cathode	12.6	0.500	Det. Power Amp.	12.6	15 Meg. ¹	12.6	6.0	1.0	4,000	5,000	3,500	10	12EM6
12EN6	T-9	Beam Pent.	7S	Cathode	12.6I	0.600	0.65*	14*	8.0*	Vert. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 1,200 Volts. Maximum D.C. Cathode Currents = 50 Ma. Maximum Plate Dissipation = 7.0 Watts. 200 9.5 110 50										12EN6
12EZ6	T-5½	Pentode	7BK	Cathode	12.6	0.175	.008*	7.8*	5.5*	R-F or I-F Amp.	12.6	0.7 2.2 Meg. ¹	12.6	1.9	0.7	400,000	2,700	12EZ6
12F5GT	T-9	Triode	5M-0-0	Cathode	12.6	0.150	2.8*	2.2*	3.2*	Amplifier	Characteristics Same as Type 6F5GT.										12F5GT
12F8	T-6½	Duodi. Pent.	9FH	Cathode	12.6	0.150	.06	4.5	3.0	Amplifier	12.6	0	12.6	1.0	0.38	0.33 Meg.	1,000	12F8
12FA6	T-5½	Heptode	7CH	Cathode	12.6	0.150	0.25	7.2	12	Converter	12.6	0.5 2.2 Meg. ¹	12.6	.45	1.0	800,000	320 ^Δ	12FA6
12FK6	T-5½	Duodiode Tri.	7BT	Cathode	12.6	0.150	1.6*	1.8*	0.7*	Det. Amp.	12.6	2.2 Meg ¹	1.3	6,200	1,200	7.4	12FK6
12FM6	T-5½	Duodiode Tri.	7DT	Cathode	12.6	0.150	1.7*	2.7*	1.7*	Det. Amp.	12.6	2.2 Meg ¹	1.0	7,700	1,300	10	12FM6
12G4	T-5½	Triode	6BG	Cathode	12.6	0.150	3.4	2.6	3.2	Amplifier	Identical to One Section of Type 6SN7GT.										12G4
12G8	T-6½	Duotriode	9CZ	Cathode	12.6	0.400	Amplifier	12.6 12.6	0	Input Tri. Output Tri.	3.0 7.2	8,500	2,600	22	2,000	25	12G8
12H4	T-5½	Triode	7DW	Cathode	6.3/ 12.6	0.300/ 0.150	3.4	2.6	3.2	Amplifier	90 250	0 8	10 9.0	3,000 2,600	20	12H4
12H6	Metal	Duodiode	7Q-1-1	Cathode	12.6	0.150	Rectifier	Characteristics Same as Type 6H6.										12H6
12J5GT	T-9	Triode	6Q-0-0	Cathode	12.6	0.150	3.8	4.2	5.0	Amplifier	Characteristics Same as Type 6J5GT.										12J5GT
12J7GT	T-9	Pentode	7R-1-1	Cathode	12.6	0.150	.007m	5.4	12.0	R-F Amp.	Characteristics Same as Type 6J7G.										12J7GT
12J8	T-6½	Duo. Tetrode	9GC	Cathode	12.6	0.300	0.7*	10.5*	4.4*	Det. Amp.	12.6	2.2Meg. ¹	12.6	12	1.5	6,000	5,500	2,700	20	12J8
12K5	T-5½	Tetrode	7FD	Cathode	12.6	0.400	Power Amp. Driver	12.6	G2=2 (Designed for Space-Change Grid Operation).	G1=12.6	8	75	480	15,000	7.2	800	40	12K5
12K7GT	T-9	Pentode	7R-1-8	Cathode	12.6	0.150	.007m	5.0	12.0	R-F Amp.	Characteristics Same as Type 6K7G.										12K7GT
12K8	Metal	Tri. Hexode	8K-1-8	Cathode	12.6	0.150	.03m .08m	6.6 5.0	3.5 4.8	Mixer Osc. Converter	Characteristics Same as Type 6K8GT.										12K8 12K8GT
12L6GT	T-9	Beam Pent.	7S-0-0	Cathode	12.6I	0.600	Power Amp.	Characteristics Same as Type 25L6GT. (12L6GT Designed for Series String TV Receivers).										12L6GT
12L8GT	T-9	Duo. Pentode	8BU-0-0	Cathode	12.6	0.150	0.7*	5.0*	6.0*	Power Amp.	110 180	5.5 9.0	110 180	6.1# 13.0#	1.3# 2.8#	220,000# 160,000#	1,680# 2,150#	14,000# 10,000#	300# 1,000#	12L8GT
12Q7GT	T-9	Duodiode Tri.	7V-1-8	Cathode	12.6	0.150	1.6	2.2	5.0	Det. Amp.	Characteristics Same as Type 6Q7GT.										12Q7GT
12R5	T-5½	Beam Pent.	7CV-0-0	Cathode	12.6I	0.600	0.55*	13.0*	9.0*	Vert. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 1,500 Volts. Maximum D.C. Cathode Current = 45 Ma. Maximum Plate Dissipation = 4.5 Watts. 110 8.5 110 40.0										12R5
12S8GT	T-9	Triple Dio. Tri.	8CB-0-2	Cathode	12.6	0.150	2.0	1.2	5.0	Det. Amp.	Characteristics Same as Type 6S8GT.										12S8GT

12SA7	Metal T-9	Heptode	8R-1-0	Cathode	12.6	0.150	0.25	9.5	9.5	Converter	Characteristics Same as Type 6SA7.	12SA7
12SA7GT			8AD-1-6				0.5m	11.0	11.0			12SA7GT
12SC7	Metal	Duotriode	8S-1-0	Cathode	12.6	0.150	2.0	2.2	3.0	Amplifier	Characteristics Same as Type 6SC7	12SC7


- (1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
(2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor.
X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

≠ Per Tube or Section.
§ Plate and Target Supply Voltage.
† Maximum Signal.

□ Applied through 20,000 ohms.
▲ Conversion Transconductance.
** Triode Operation.

↑ Plate to Plate.
♦ Approximate.

m maximum.
■ Cathode Resistor (ohms).

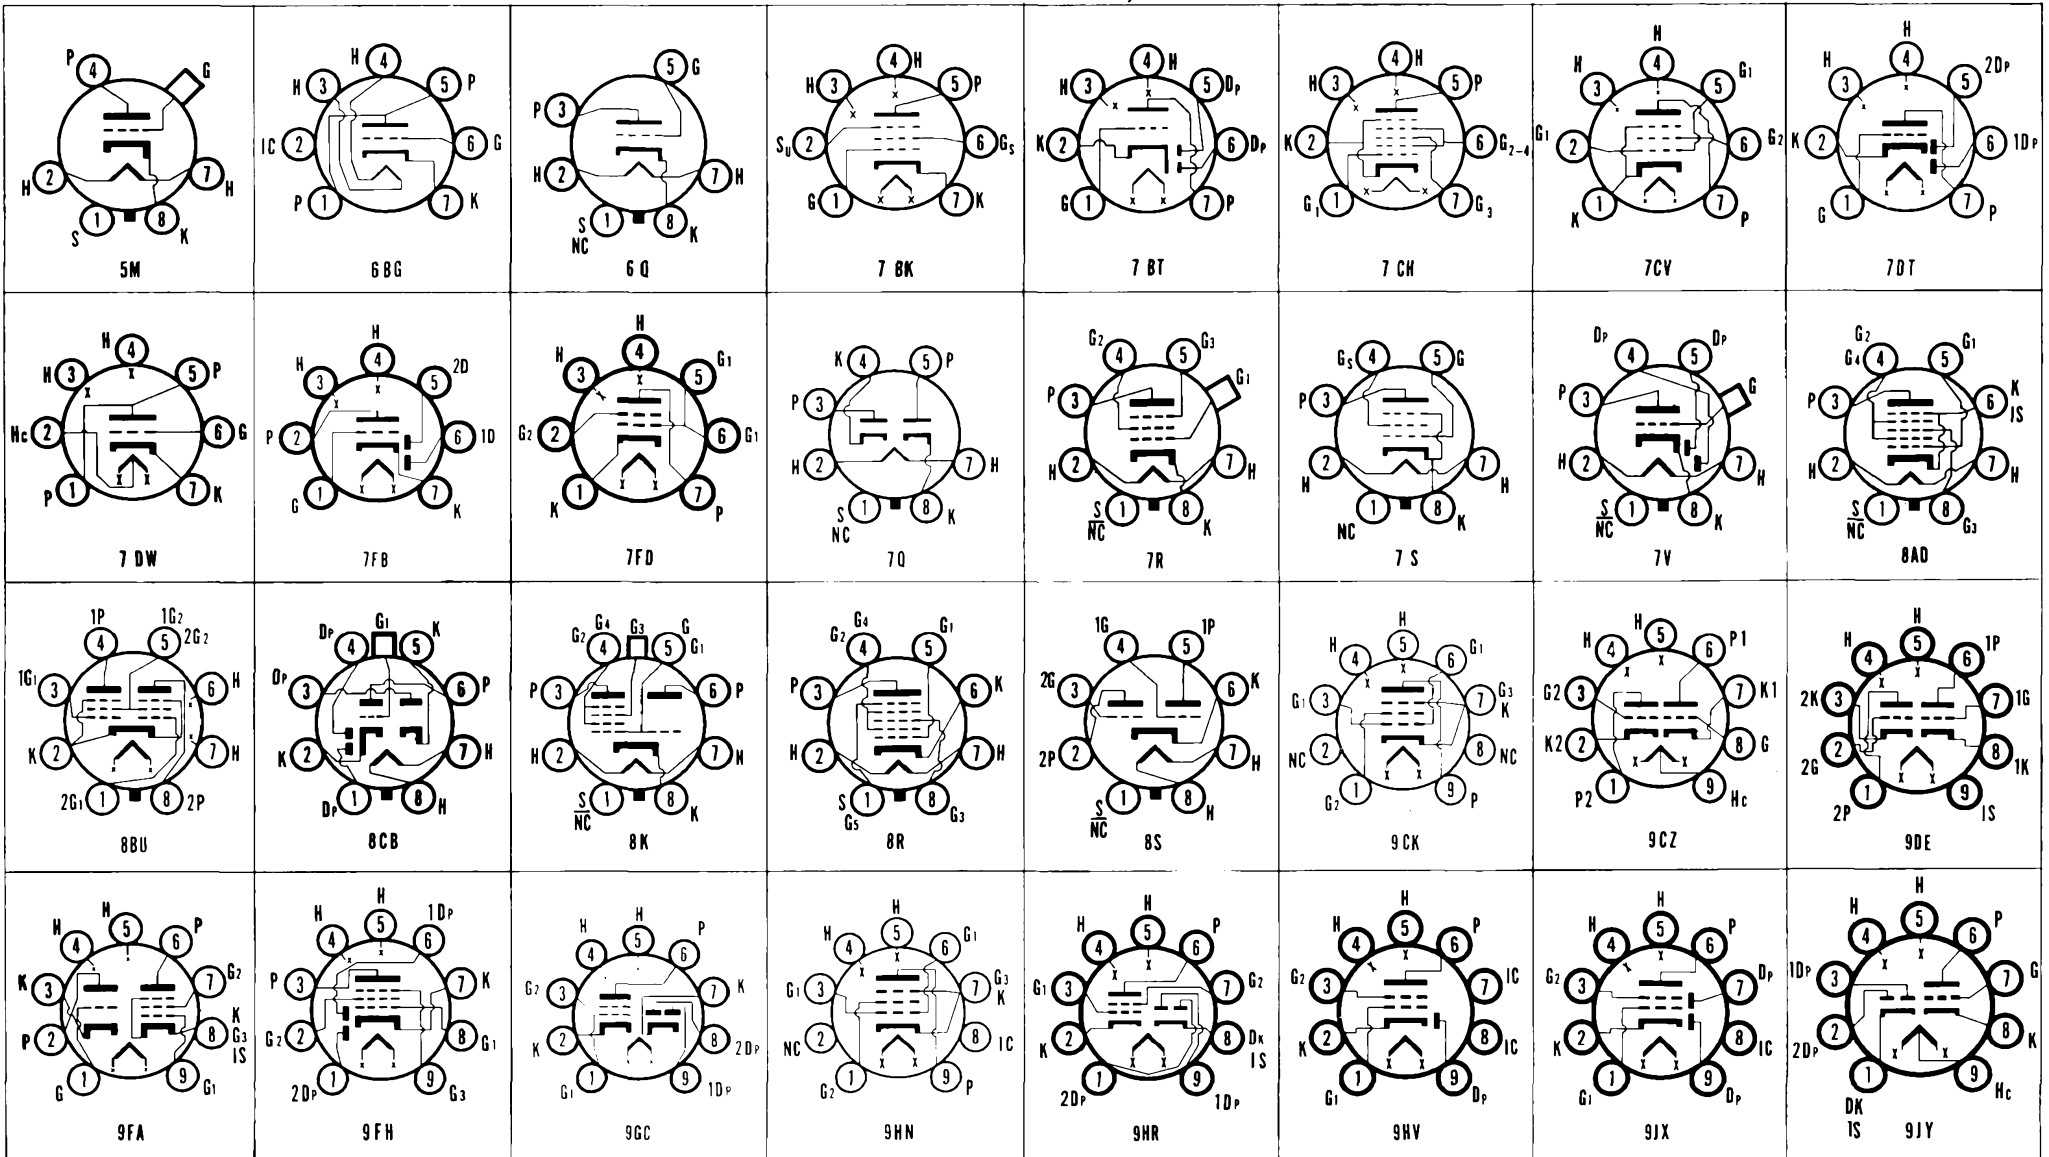

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\mu$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Stated Power Output	Power Output Milli- watts	Type
	Bulb Size or Style	Class	Biasing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
12SF5 12SF5GT	Metal T-9	Triode	6AB-0-0	Cathode	12.6	0.150	2.4 2.6	4.0 4.2	3.6 3.8	Amplifier	Characteristics Same as Type 6SF5.										12SF5 12SF5GT
12SF7	Metal	Diode Pent.	7AZ-1-0	Cathode	12.6	0.150	.004m	5.5	6.0	Det. Amp.	Characteristics Same as Type 6SF7.										12SF7
12SG7	Metal	Pentode	8BK-1-1	Cathode	12.6	0.150	.003m	8.5	7.0	R-F Amp.	Characteristics Same as Type 6SG7.										12SG7
12SH7 12SH7GT	Metal T-9	Pentode	8BK-1-0 8BK-1-1	Cathode	12.6	0.150	.003m	8.5	7.0	R-F Amp.	Characteristics Same as Type 6SH7.										12SH7 12SH7GT
12SJ7 12SJ7GT	Metal T-9	Pentode	8N-1-1 8N-1-5	Cathode	12.6	0.150	.005m .005m	6.0 6.3	7.0 7.5	R-F Amp.	Characteristics Same as Type 6SJ7.										12SJ7 12SJ7GT
12SK7 12SK7GT	Metal T-9	Pentode	8N-1-1 8N-1-5	Cathode	12.6	0.150	.003m .005m	6.0 6.5	7.0 7.5	R-F Amp.	Characteristics Same as Type 6SK7.										12SK7 12SK7GT
12SL7GT	T-9	Duotriode	8BD-0-0	Cathode	12.6	0.150	Amplifier	Characteristics Same as Type 6SL7GT.										12SL7GT
12SN7GT	T-9	Duotriode	8BD-0-0	Cathode	12.6	0.300	3.8* 4.0*	9.8* 3.0*	0.8* 1.2*	Amplifier	Characteristics Same as Type 6SN7GT.										12SN7GT
12SN7GTA	T-9	Duotriode	8BD-0-0	Cathode	12.6	0.300	4.0* 3.8*	2.2* 2.6*	0.7* 0.7*	Vertical Osc. Amp.	Characteristics Same as Type 6SN7GTA.										12SN7GTA
12SQ7 12SQ7GT	Metal T-9	Duodiode Tri.	8Q-1-3	Cathode	12.6	0.150	1.6 1.8	3.2 4.2	3.0 3.4	Det. Amp.	Characteristics Same as Type 6SQ7.										12SQ7 12SQ7GT
12SR7	Metal	Duodiode Tri.	8Q-1-1	Cathode	12.6	0.150	2.3	3.0	3.0	Det. Amp.	Characteristics Same as Type 6SR7.										12SR7
12SW7	Metal	Duodiode Tri.	8Q-1-0	Cathode	12.6	0.150	2.4	3.0	2.8	Det. Amp.	26.5 250	Self 9	1.1 9.5	15,500 8,500	1,100 1,900	17 16	(2 Meg. Grid Res.)	12SW7
12SX7GT	T-9	Duotriode	8BD-0-0	Cathode	12.6	0.300	3.6* 3.6*	3.0* 2.8*	0.8* 1.2*	Amplifier	26.5 90 250	Self 0 8	11,500 6,700 7,700	1,800 3,000 2,500	21 20 20	(.05 Meg. Grid Res.)	12SX7GT
12SY7	Metal	Heptode	8R-1-0	Cathode	12.6	0.150	0.13*	9.5*	12.0*	Converter	250	2.0	100	3.5	8.5	1 Meg. \downarrow	450 Δ	12SY7
12U7	T-6 1/2	Duotriode	7CK	Cathode	12.6	0.150	1.5	1.8	2.0	Class A1 Amp.	12.6	0	1.0	12,500	1,600	20	12U7
12V6GT	T-9	Beam Pent.	7S	Cathode	12.6	0.225	0.7	9.0	7.5	Power Amp.	180 250	8.5 12.5	180 250	29 45	3 4.5	50,000 \downarrow	3,700 4,100	5,500 5,000	2,000 4,500	12V6GT
12W6GT	T-9	Beam Pent.	7S-0-0	Cathode	12.6I	0.600	0.8* Triode Connection	15.0* 9.0*	Power Amp. Vert. Defl. Apm.	Characteristics Same as Type 6W6GT. (12W6GT Designed for Series String TV Receivers).										12W6GT
12X4	T-5 1/2	Duodiode	5BS	Cathode	12.6	0.450	F-W Rect.	Characteristics same as type 6X4.										12X4
12Z3	T-9	Diode	4G-0-0	Cathode	12.6	0.300	H-W Rect.	235 A-C Volts Per Plate, RMS, 55 Ma. Output Current. Condenser Input to Filter.										12Z3
13DE7	T-6 1/2	Duotriode	9HF	Cathode	13.0I	0.450	4.0* 8.5*	2.2* 5.5*	0.52* 1.0*	Vert. Osc. Vert. Defl. Amp.	Characteristics Same as Type 16DE7. (13DE7 Designed for Series String TV Receivers).										13DE7
13DR7	T-6 1/2	Duotriode	9HF	Cathode	13I	0.450	4.5* 8.5*	2.2* 5.5*	0.34* 1.0*	S. 2 Ver. Amp. S. 1 Ver. Osc.	Characteristics Same as Type 6DR7. (13DR7 Designed for Series String Receivers).										13DR7
14A4	Lock-in	Triode	5AC-L-0	Cathode	12.6	0.150	4.0	3.4	3.0	Amplifier	Characteristics Same as Type 7A4.										14A4
14A5	Lock-in	Beam Amp.	6AA-L-0	Cathode	12.6	0.150	0.4	6.8	7.0	Power Amp.	250	12.5	250	30.0	3.5	70,000 \downarrow	3,000	7,500	2,800	14A5
14A7	Lock-in	Pentode	8V-L-5	Cathode	12.6	0.150	.003m	6.0	7.0	R-F Amp.	Characteristics Same as Type 7A7.										14A7
14AF7/XXD	Lock-in	Duotriode	8AC-L-0	Cathode	12.6	0.150	2.3*	2.2*	1.6*	Amplifier	Characteristics Same as Type 7AF7.										14AF7/XXD
14B6	Lock-in	Duodiode Tri.	8W-L-7	Cathode	12.6	0.150	1.5	3.0	2.4	Det. Amp.	Characteristics Same as Type 7B6.										14B6
14B8	Lock-in	Heptode	8X-L-0	Cathode	12.6	0.150	0.2m	10.0	9.0	Converter	Characteristics Same as Type 7B8.										14B8
14C5	Lock-in	Beam Pent.	6AA-L-0	Cathode	12.6	0.225	0.4	9.5	9.0	Power Amp.	Characteristics Same as Type 7C5.										14C5
14C7	Lock-in	Pentode	8V-L-5	Cathode	12.6	0.150	.004m	6.0	6.5	R-F Amp.	100 250	1.0 3.0	100 100	5.7 2.2	1.8 0.7	400,000 \downarrow 1.0 Meg. \downarrow	2,275 1,575	14C7
14E6	Lock-in	Duodiode Tri.	8W-L-7	Cathode	12.6	0.150	1.5	3.0	2.4	Det. Amp.	Characteristics Same as Type 7E6.										14E6
14E7	Lock-in	Duodi. Pent.	8AE-L-7	Cathode	12.6	0.150	.005m	4.6	5.5	Det. Amp.	Characteristics Same as Type 7E7.										14E7
14F7	Lock-in	Duotriode	8AC-L-0	Cathode	12.6	0.150	1.6#	2.4#	2.0#	Amplifier	Characteristics Same as Type 7F7.										14F7
14F8	Lock-in	Duotriode	8BW-L-0	Cathode	12.6	0.150	1.6	2.8#	1.4#	Osc. Amp.	Characteristics Same as Type 7F8.										14F8
14G6	T-6 1/2	Duodiode Tri.	9Z	Cathode	14	0.100	1.3*	2.4*	1.3*	Det. Amp.	100	1.0	0.8	50,000	1,400	70	14G6
14H7	Lock-in	Pentode	8V-L-5	Cathode	12.6	0.150	.004m	8.0	7.0	R-F Amp.	Characteristics Same as Type 7H7.										14H7
14J7	Lock-in	Tri. Heptode	8BL-L-7	Cathode	12.6	0.150	.03m	4.6	7.5	Mixer Osc.	Characteristics Same as Type 7J7.										14J7
14N7	Lock-in	Duotriode	8AC-L-0	Cathode	12.6	0.300	Amplifier	Characteristics Same as Type 7N7.										14N7
14Q7	Lock-in	Heptode	8AL-L-0	Cathode	12.6	0.150	0.15m	9.0	9.0	Converter	Characteristics Same as Type 7Q7.										14Q7
14R7	Lock-in	Duodi. Pent.	8AE-L-7	Cathode	12.6	0.150	.004m	5.6	5.3	Det. Amp.	Characteristics Same as Type 7R7.										14R7
14S7	Lock-in	Tri. Heptode	8BL-L-7	Cathode	12.6	0.150	.03m	5.0	8.0	Mixer Osc.	Characteristics Same as Type 7S7.										14S7
14W7	Lock-in	Pentode	8BJ-L-5	Cathode	12.6	0.225	.002m	9.5	7.0	R-F Amp.	Characteristics Same as Type 7V7, Except Capacitances.										14W7
14X7	Lock-in	Duodiode Tri.	8BZ-L-4	Cathode	12.6	0.150	Det. Amp.	Characteristics Same as Type 7X7.										14X7
14Y4	Lock-in	Duodiode	5AB-L-0	Cathode	12.6	0.300	F-W Rect.	325 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Choke Input to Filter.										14Y4
14Y7	T-6 1/2	Tri. Hexode	9Q	Cathode	14.0	0.100	1.4* 0.1*	5.6* 3.8*	2.4* 9.2*	Tri. Osc. Hex. Amp.	100 100	0 1.0 43	10 1.2 1.46 1.0 Meg. \downarrow	2,800 530 Δ	14Y7
15	ST-12	Pentode	5F-0-4	Cathode	2.0	0.220	.01m	2.4*	8.0*	R-F Amp.	67.5 135	1.5 1.5	67.5 67.5	1.85 1.85	0.3 0.3	630,000 800,000	710 750	450 600	15
15A8	T-9	Tri. Beam Pent.	8GS	Cathode	15.0I	0.600	3.4 0.7	2.6 11.0	0.9 5.0	Pent. Vert. Defl. Amp. Tri. Vert. Osc.	Maximum Peak Positive Pulse Plate Voltage = 1,200 Volts. Maximum D.C. Cathode Current = 40 Ma. Maximum Plate Dissipation = 7.5 Watts.										15A8
											110 250	7.5 8.0	110	45.0 9.0	4.0	13,000 7,700	7,300 2,600	

17AV5GA	T-11 or T-12	Beam Pent.	6CK-0-0	Cathode	16.8I	0.450	0.5*	14.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6AV5GA. (17AV5GA Designed for Series String TV Receivers).	17AV5GA
17AX4GT	T-9	Diode	4CG-0-0	Cathode	16.8I	0.450	T.V. Dampner	Characteristics Same as Type 6AX4GT. (17AX4GT Designed for Series String TV Receivers).	17AX4GT
17BQ6GTB	T-12	Beam Pent.	6AM	Cathode	16.8I	0.450	0.6*	15.0*	7.5*	Horiz. Defl. Amp.	Characteristics Same as Type 6BQ6GTB. (17BQ6GTB designed for Series String TV Receivers).	17BQ6GTB


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
 (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor.
 I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
 § Plate and Target Supply Voltage.
 † Maximum Signal.

□ Applied through 20,000 ohms.
 ▲ Conversion Transconductance.
 ** Triode Operation.

‡ Plate to Plate.
 † Approximate.

m maximum.
 ■ Cathode Resistor (ohms).

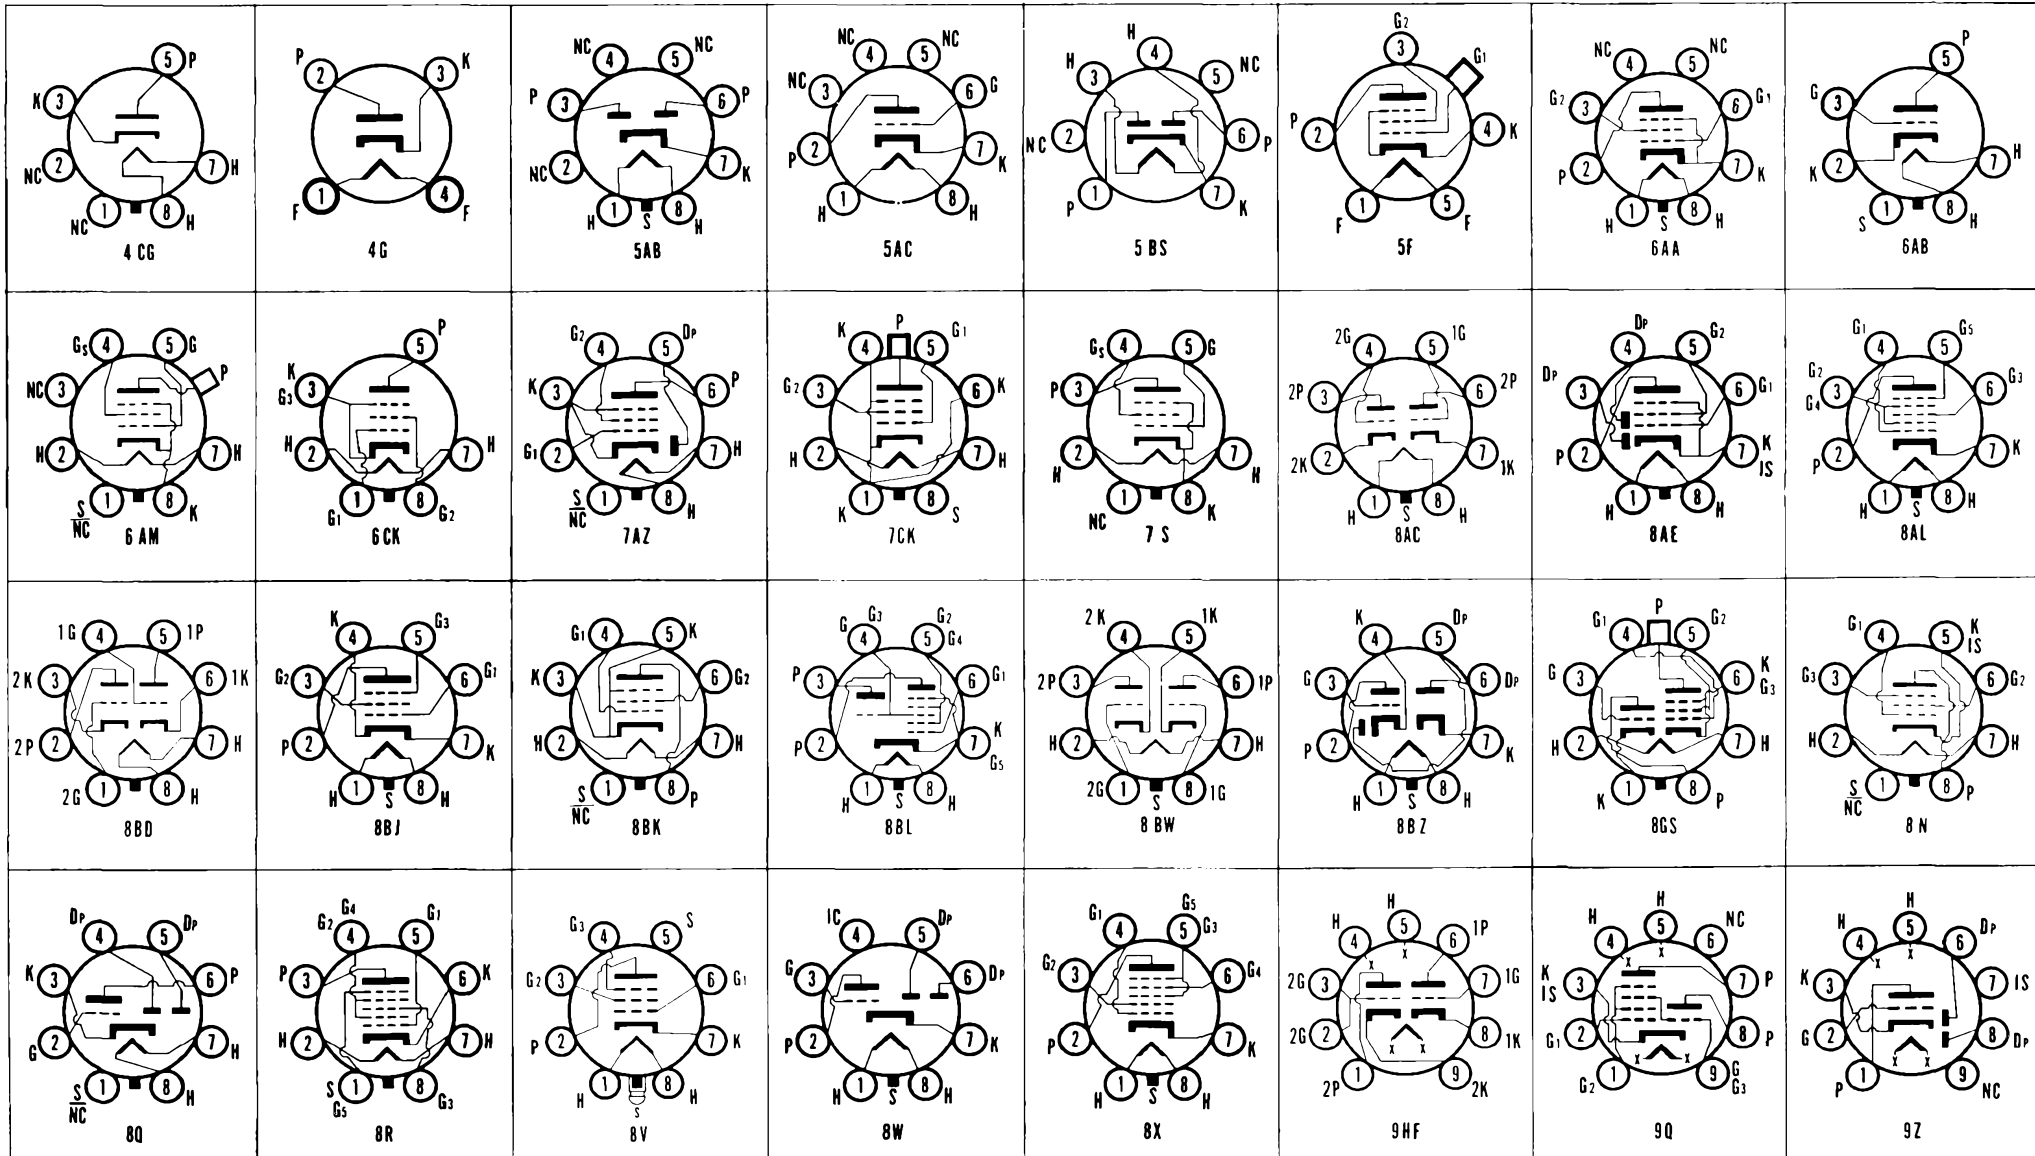

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitance in $\mu\mu$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Ampli- fication Factor	Ohms Load for Stated Power Output	Power Output Milli- watts	Type
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
17C5	T-5½	Beam Pent.	7CV-0-0	Cathode	16.8I	0.450	0.6*	13.0*	8.5*	Power Amp.	Characteristics Same as Type 12C5. (17C5 Designed for Series String TV Receivers).										17C5
17C8	T-6½	Pentode	9T	Cathode	17	0.100	.0025*	4.2*	4.9*	R-F Amp.	200	295 ^a	60	5	1.75	1 Meg. †	2,200	17C8
17CA5	T-5½	Beam Pent.	7CV-0-0	Cathode	16.8I	0.450	0.5*	15.0*	9.0*	Power Amp.	Characteristics Same as Type 12CA5. (17CA5 Designed for Series String TV Receivers).										17CA5
17D4	T-9	Diode	4CG	Cathode	16.8I	0.450	T.V. Damper	Maximum Peak Inverse Plate Voltage = 4,400 Volts. Maximum D.C. Plate Current = 155 Ma.										17D4
17DQ6 17DQ6A	T-12	Beam Pent.	6AM	Cathode	16.8I	0.450	0.55*	15.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6DQ6. (17DQ6 and 17DQ6A are Designed for Series String TV Receivers). Characteristics Same as Type 6DQ6A.										17DQ6 17DQ6A
17H3	T-6½	Diode	9FK-0-0	Cathode	17.5I	0.300	T.V. Damper	Maximum Peak Inverse Plate Voltage = 2,000 Volts. Maximum D.C. Output Current = 75 Ma.										17H3
17L6GT	T-9	Beam Pent.	7S-0-0	Cathode	16.8I	0.450	Power Amp.	Characteristics Same as Type 25L6GT. (17L6GT Designed for Series String TV Receivers).										17L6GT
17R5	T-5½	Beam Pent.	7CV-0-0	Cathode	16.8I	0.450	0.55*	13.0*	9.0*	Vert. Defl. Amp.	Characteristics Same as Type 12R5. (17R5 Designed for Series String TV Receivers).										17R5
18	ST-14	Beam Pent.	6B-0-0	Cathode	14.0	0.300	Power Amp.	Characteristics Same as Type 6F6G.										18
18A5	T-9	Beam Pent.	6CK-0-0	Cathode	18.5I	0.300	0.7*	13.0*	7.0*	Horiz. Defl. Amp.	Maximum Peak Positive Pulse Plate Voltage = 3,000 Volts. Maximum D.C. Cathode Current = 90 Ma. Maximum Plate Dissipation = 9 Watts. 200 17.0 125 40.0 1.1 27,000 4,800										18A5
18DZ8	T-6½	Tri. Beam Pent.	6DZ8	Cathode	18	0.300	A-F Voltage Amp. and Power Amp.	Characteristics Same as Type 6DZ8. (18DZ8 Designed for Series String Receivers).										18DZ8
19	T-9	Duotriode	6C-0-0	Filament	2.0	0.260	Power Amp.	135	0.0	5-18†	(Class B Operation)		10,000†	2,100	19
19AQ5	T-5½	Beam Pent.	7BZ	Cathode	18.9	0.150	Power Amp.	Same as 6AQ5.										19AQ5
19AU4	T-9	Diode	4CG-0-0	Cathode	18.9I	0.600	T.V. Damper	Characteristics Same as Type 6AU4GT. (19AU4 Designed for Series String TV Receivers).										19AU4
19AU4GTA	T-9	Diode	4CG-0-0	Cathode	18.9I	0.600	T.V. Damper	Characteristics Same as Type 6AU4GTA. (19AU4GTA Designed for Series String TV Receivers).										19AU4GTA
19BG6G 19BG6GA	ST-16 T-12	Beam Pent.	5BT-0-0	Cathode	18.9	0.300	0.34* 0.8*	12.0* 11.0*	6.5* 6.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6BG6G.										19BG6G 19BG6GA
19C8	T-6½	Triple Dio. Tri.	9E-0-0	Cathode	18.9	0.150	Det. Amp.	100	1.0	0.5	80,000	1,250	100	19C8
19D8	T-6½	Tri. Heptode	9CA	Cathode	19.0	0.100	1.0 .006	2.6 4.8	2.1 7.9	F.M. Tri. Osc. A.M. Hept. Converter	100 100	0 1.1	63	13.5 1.7	3.7	800,000	3,700 620Δ	22	19D8
19J6	T-5½	Duotriode	7BF-0-0	Cathode	18.9	0.150	1.5* †	2.0* †	0.4* †	VHF Osc. Amp.	150	810 ^a	4.8	10,200	1,900	19J6
19T8	T-6½	Triple Diode Triode	9E-0-3 & 7	Cathode	18.9	0.150	1.7*	1.7*	2.4*	Det. Amp.	Characteristics Same as Type 6T8.										19T8
19V8	T-6½	Triple Diode Triode	9AH-0-3	Cathode	18.9	0.150	Det. Amp.	100 250	1.0 3.0	0.8 1.0	54,000 58,000	1,300 1,200	70 70	19V8
19X8	T-6½	Tri. Pentode	9AK	Cathode	18.9	0.150	VHF Osc. Amp.	Characteristics Same as Type 6X8.										19X8
20	T-8	Triode	4D-0-0	Filament	3.3	0.132	Power Amp.	90 135	16.5 22.5	2.8 6.0	7,800 5,850	450 600	3.5 3.5	9,600 6,500	50 130	20
22	ST-14	Tetrode	4K-0-3	Filament	3.3	0.132	.02m	4.0*	10.0*	R-F Amp.	135	1.5	67.5	3.7	1.3	250,000	500	125	22
24A 24S	ST-14	Tetrode	5E-0-3 5E-4-3	Cathode	2.5	1.750	.007m	5.3	10.5	R-F Amp. Detector	180 250	3.0 3.0	90 90	4.0 4.0	1.7 1.7	400,000 600,000	1,000 1,050	400 630	24A 24S
25A6 25A6GT	Metal T-9	Power Pent.	7S-1-0 7S-0-0	Cathode	25.0	0.300	Power Amp.	95 135 160	15.0 20.0 18.0	95 135 120	20.0 37.0 33.0	4.0 8.0 6.5	45,000 35,000 42,000	2,000 2,450 2,375	4,500 4,000 5,000	900 2,000 2,200	25A6 25A6GT
25A7GT	T-9	Diode Pent.	8F-0-0	Cathode	25.0	0.300	H-W Rect. Power Amp.	117 100	A-C Volts Per Plate, RMS, 75 Ma. Output Current.			4.0	50,000	1,800	4,500	770	25A7GT
25AC5GT	T-9	Triode	6Q-0-0	Cathode	25.0	0.300	Power Amp. Coupled Amp.	110 165	+15	45.0	15,200	3,800	58	2,000	2,000	25AC5GT
25AV5GT	T-9	Beam Pent.	6CK-0-0	Cathode	25.0	0.300	0.7*	14.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6AV5GT.										25AV5GT
25AV5GA	T-11 or T-12	Beam Pent.	6CK-0-0	Cathode	25.0	0.300	0.5*	14.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6AV5GA.										25AV5GA
25AX4GT	T-9	Diode	4CG	Cathode	25.0	0.300	T.V. Damper	P.I.V. = 4,000 Volts Max. D.C. Plate Current = 125 Ma. Max.										25AX4GT
25B5	ST-12	Duotriode	6D-0-0	Cathode	25.0	0.300	Power Amp.	Characteristics Same as Type 25N6G.										25B5
25B6G	ST-14	Beam Pent.	7S-0-0	Cathode	25.0	0.300	Power Amp.	105 200	16.0 23.0	105 135	48.0 62.0	2.0 1.8	15,500 18,000	4,800 5,000	1,700 2,500	2,400 7,100	25B6G
25B8GT	T-9	Pentode Tri.	8T-0-1	Cathode	25.0	0.150	.02 2.2	5.5 5.0	10.0 4.6	Pent. Amp. Tri. Amp.	106 100	3.0 1.0	100	7.6 0.6	2.0	185,000 75,000	2,000 1,500	370 112.5	(Pentode Section) (Triode Section)		25B8GT
25BK5	T-6½	Beam Pent.	9BQ	Cathode	25.0	0.300	0.6	13.0	5.0	Power Amp.	Same as 6BK5.										25BK5
25BQ6GA 25BQ6GT	T-11 T-9	Beam Pent.	6AM-0-0	Cathode	25.0	0.300	0.6*	15.0*	7.5*	Horiz. Defl. Amp.	Characteristics and Ratings Same as Type 6BQ6G. Characteristics Same as Type 6BQ6GT.										25BQ6GA 25BQ6GT
25BQ6GTB	T-9	Beam Pent.	6AM-0-0	Cathode	25.0	0.300	0.6*	15.0*	7.5*	Horiz. Amp.	Characteristics Same as Type 6BQ6GTB.										25BQ6GTB
25C5	T-5½	Beam Pent.	7CV	Cathode	25.0	0.300	0.6*	13.0*	8.5*	Power Amp.	120	8	110	49	4.0	10,000	7,500	2,500	2,300	25C5
25C6G 25C6GA	ST-14 T-12	Beam Pent.	7S-0-0	Cathode	25.0	0.300	Power Amp.	Characteristics Same as Type 6Y6G.										25C6G 25C6GA
25CA5	T-5½	Beam Pent.	7CV-0-0	Cathode	25.0	0.300	0.5*	15.0*	9.0*	Power Amp.	Characteristics Same as Type 6CA5.										25CA5
25CD6G 25CD6GA	ST-16	Beam Pent.	5BT-0-0	Cathode	25.0 25.0I	0.600 0.600	1.0m*	26.0m*	10.0m*	Horiz. Defl. Amp.	Characteristics Same as Type 6CD6G. (25CD6GA Designed for Series String TV Receivers).										25CD6G 25CD6GA

25CD6GB	T-12	Beam Pent.	5BT-0-0	Cathode	25.0†	0.600	1.1*	22.0*	8.5*	Horiz. Defl. Amp.	Characteristics Same as Type 6CD6GA. (25CD6GB Designed for Series String TV Receivers).										25CD6GB
25CR5	T-6½	Beam Pent.	9HC-0-0	Cathode	25.0	0.300	0.32*	12.9*	6.9*	Horiz. Defl. Amp.	Characteristics Same as Type 6CR5.										25CR5
25CU6	T-12	Beam Pent.	6AM-0-0	Cathode	25.0	0.300	0.55*	15.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6BQ6G, Except Max. D.C. Plate Supply = 550 Volts.										25CU6
25D8GT	T-9	Diode Triode Pentode	8AF-0-1	Cathode	25.0	0.150	2.5* .015m	3.7* 5.2	4.5* 10.0	Det. Amp. R-F Amp.	100 100	1.0 3.0	100	0.5 8.5	2.7	91,000 200,000	1,100 1,900	100	25D8GT
25DN6	T-12	Beam Pent.	5BT-0-0	Cathode	25.0†	0.600	0.8*	22.0*	11.5*	Horiz. Defl. Amp.	Peak Positive Pulse Plate Voltage = 6,600 Volts Max. D.C. Cathode Current = 900 Ma. Maximum Plate Dissipation = 15 Watts. Maximum Screen Dissipation = 3.0 Watts. (25DN6 Designed for Series String TV Receivers).										25DN6


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
(2) Converter tube capacitances given are signal grid to plate; RF input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor.
X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
§ Plate and Target Supply Voltage.
† Maximum Signal.

□ Applied through 20,000 ohms.
▲ Conversion Transconductance.
** Triode Operation.

‡ Plate to Plate.
♦ Approximate.

m maximum.
■ Cathode Resistor (ohms).

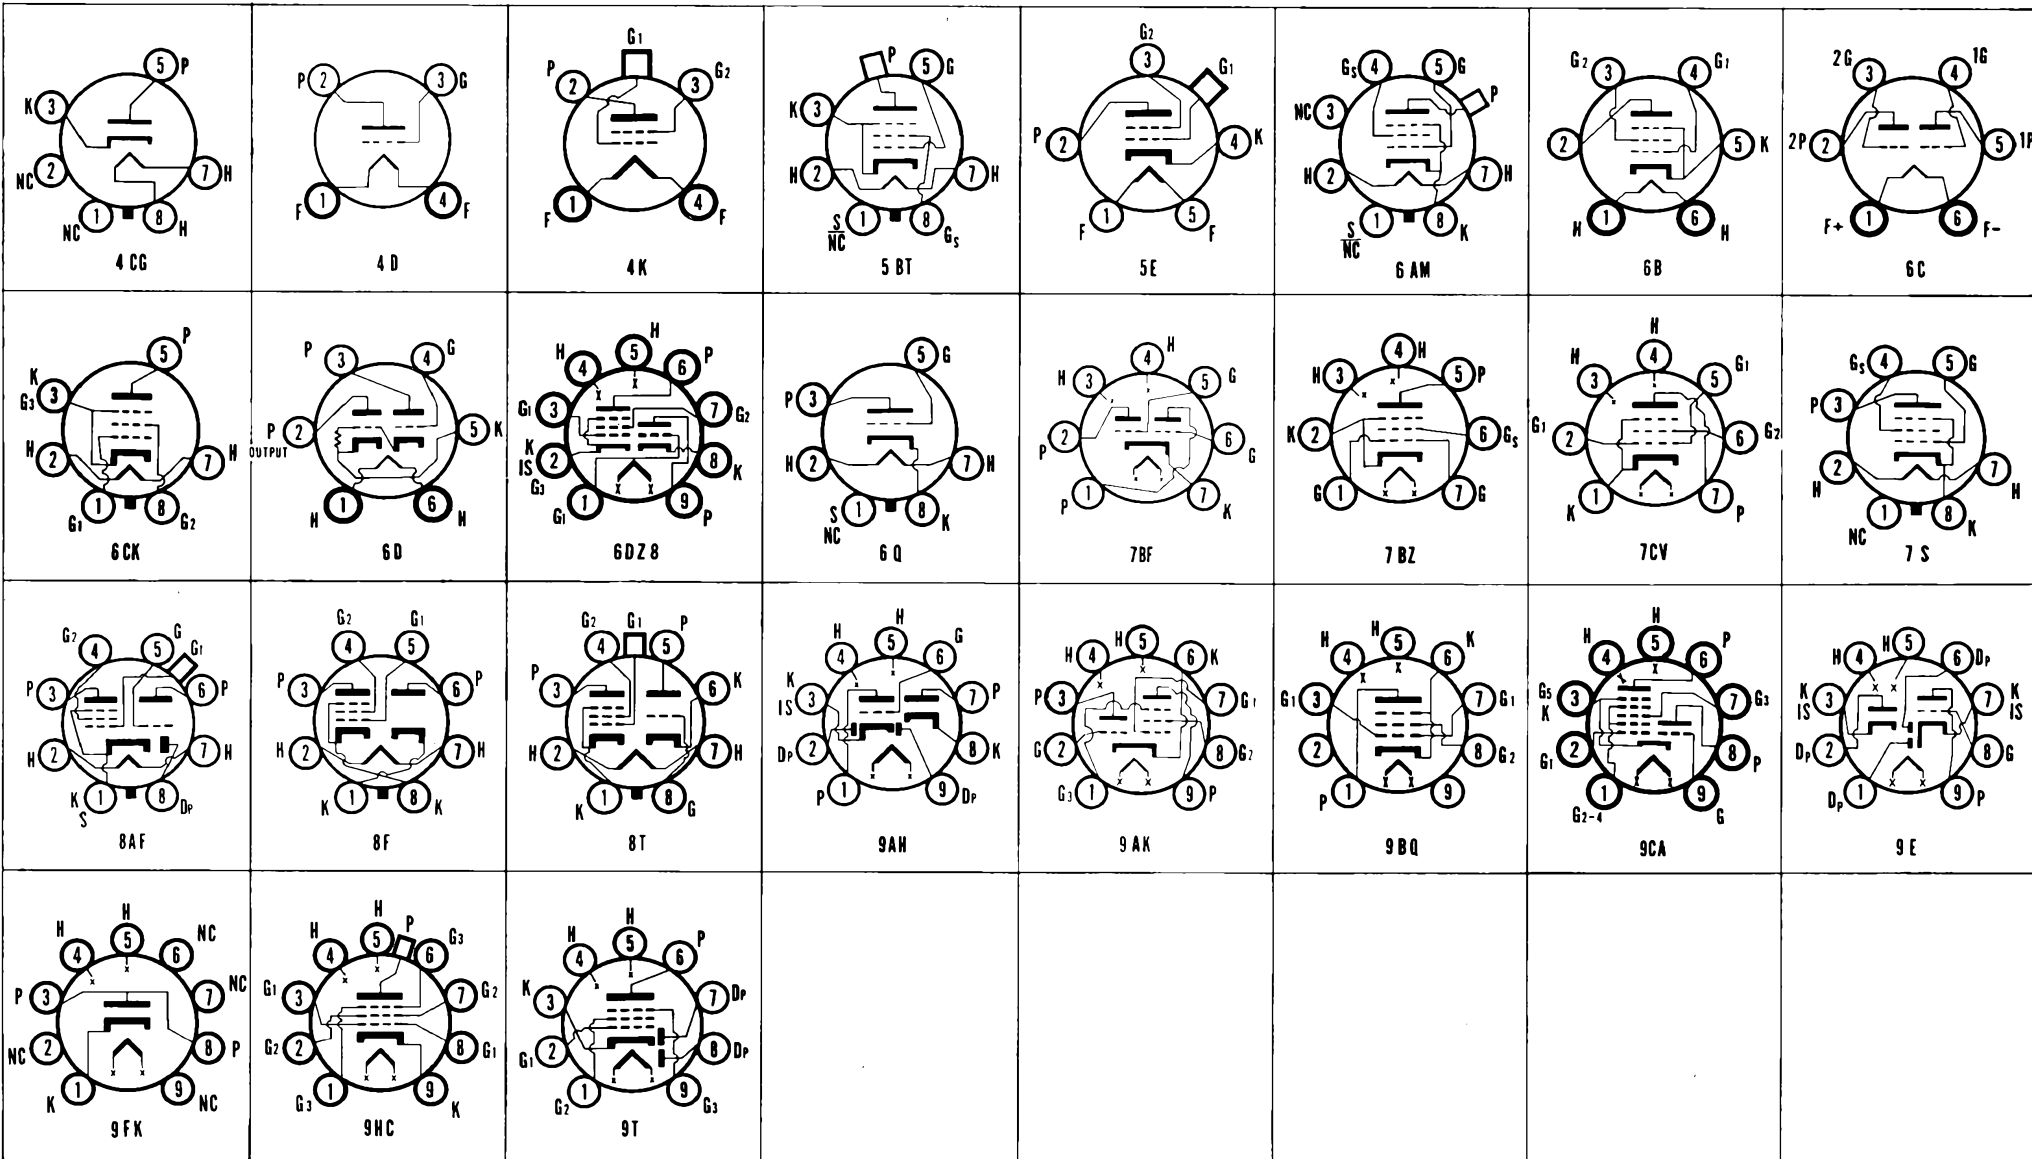

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper, K—Cathode, NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES - AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (!) (?) Capacitances in $\mu\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Trans-conductance Micromhos	Ampli-fication Factor	Ohms Load for Stated Power Output	Power Output Milli-watts	Type	
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
25DQ6	T-12	Beam Pent.	6AM-0-0	Cathode	25.0	0.300	0.55*	15.0*	7.0*	Horiz. Defl. Amp.	Characteristics Same as Type 6DQ6.										25DQ6	
25EH5	T-5½	Beam Pent.	7CV	Cathode	25	0.300	0.65*	17*	9*	S.T. A1 Amp.	Characteristics Same as Type 6EH5.										25EH5 50EH5	
25F5	T-5½	Beam Pent.	7CV	Cathode	25.0	0.150	0.57*	12.0*	6.0*	Power Amp.	110	8.0	110	70	7.5	4,500	2,900	25F5	
25L6	Metal T-9	Beam Pent.	7S-0-0	Cathode	25.0	0.300	Power Amp.	110	7.5	110	49.0	4.0	13,000	8,000	2,000	2,100	25L6	
25L6GT	T-9	Beam Pent.	7S	Cathode	25.0	0.300	Power Amp.	200	180	125	46	2.2	28,000	8,000	4,000	3,800	25L6GT	
25N6G	ST-12	Duodiode	7W-0-0	Cathode	25.0	0.300	Power Amp.	110	0	110	45	7.0	(Direct Coupled)	2,200	2,000	2,000	25N6G	
25N6G	ST-12	Duodiode	7W-0-0	Cathode	25.0	0.300	Power Amp.	180	0	100	46	5.8	2,300	4,000	3,800	25N6G	
25S	Now Known as Type 1B5																				25S	
25W4GT	T-9	Diode	4CG-0-0	Cathode	25.0	0.300	H-W Rect.	350 A-C Volts RMS, 125 Ma. D-C Output. Condenser Input to Filter.										25W4GT	
25W6GT	T-9	Beam Pent.	7S	Cathode	25.0	0.300	0.5	15.0	9.0	Power Amp.	110 225**	-7.5 -30	110	50 22**	4.0	13,000 1,600**	8,000 3,800** 6.2**	2,000	2,100	25W6GT	
25X6GT	T-9	Duodiode	7Q-0-0	Cathode	25.0	0.150	H-W Rect. Doubler	125 Volts RMS Per Plate, 60 Ma. D-C Output Per Plate. 125 Volts RMS Per Plate, 60 Ma. D-C Output.										25X6GT	
25Y5	ST-12	Duodiode	6E-0-0	Cathode	25.0	0.300	Doubler H-W Rect.	117 A-C Volts Per Plate, RMS, 75 Ma. Output Current. 235 A-C Volts, RMS, 75 Ma. Output Current Per Plate.										25Y5	
25Z4	Metal	Diode	5AA-1-0	Cathode	25.0	0.300	H-W Rect.	117 A-C Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter. 235 A-C Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter.										25Z4	
25Z5	ST-12	Duodiode	6E-0-0	Cathode	25.0	0.300	Doubler	Characteristics Same as Type 25Z6GT.										25Z5	
25Z6	Metal T-9	Duodiode	7Q-1-0 7Q-0-0	Cathode	25.0	0.300	Doubler H-W Rect.	117 A-C Volts Per Plate, RMS, 75 Ma. Output Current. 235 A-C Volts, RMS, 75 Ma. Output Current Per Plate.										25Z6 25Z6GT	
26	ST-14	Triode	4D-0-0	Filament	1.5	1.050	8.1*	2.8*	2.5*	Amplifier	90 135 180	7.0 10.0 14.5	2.9 5.5 6.2	8,900 7,600 7,300	935 1,100 1,150	8.3 8.3 8.3	26
26A6	T-5½	Pentode	7BK-0-2	Cathode	26.5	0.070	.0035	6.0	5.0	R-F Amp.	26.5 250	Self 125#	26.5 250	1.7 10.5	0.7 4.0	250,000 1 Meg.	2,000 4,000	(Grid Leak Bias = 2 Meg.)	26A6
26A7GT	T-9	Duo. Beam Pent.	8BU-0-0	Cathode	26.5	0.600	1.2*	16.0*	13.0*	Power Amp.	26.5	4.5	26.5	20.0#	1.9#	1,500#	5,700#	1,500#	180#	26A7GT	
26BK6	T-5½	Duodiode Tri.	7BT-0-2	Cathode	26.5	0.070	Det. Amp.	100 250	1.0 2.0	0.5 1.2	80,000 62,500	1,250 1,600	100 100	26BK6
26C6	T-5½	Duodiode Tri.	7BT-0-0	Cathode	26.5	0.070	2.0	1.8	1.4	Amplifier	26.5 250	2 Meg.	1.1 9.5	15,500 8,500	1,100 1,900	17 16	26C6
26CG6	T-5½	Pentode	7BK-0-2	Cathode	26.5	0.070	.008m	5.0	5.0	R-F Amp.	Characteristics Same as Type 6CG6.										26CG6	
26D6	T-5½	Heptode	7CH-0-0	Cathode	26.5	0.070	0.3	7.5	14.0	Converter Oscillator	100 250 100	1.5 1.5 0	100 100 100	2.8 3.0 27.0	8.0 7.8	500,000# 1 Meg. #	455# 475# 7,200 22	26D6
27	ST-12	Triode	5A-0-0 5A-0-4	Cathode	2.5	1.750	3.3*	3.2*	2.3*	Amplifier	90 135 180	6.0 9.0 13.5	3.0 4.7 5.0	10,000 9,000 9,000	900 1,000 1,000	9.0 9.0 9.0	27 27S
28D7 28D7W (3)	Lock-in	Duo. Beam Pent.	8BS-L-0	Cathode	28.0	0.400	Amplifier (per section) P.P.A2 Total	28 28 28	3.5 0	28 28 28	9.0 12.5 64.0	0.7 1.0 4.0 4,200	(Rk = 390 Ohms) 3,400	4,000 4,000 1,500†	80 100 600	28D7 28D7W (3)
28Z5	Lock-in	Double Diode	6BJ-L-0	Cathode	28.0	0.240	F-W Rect.	325 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Choke Input to Filter.										28Z5	
30	ST-12 T-9	Triode	4D-0-0	Filament	2.0	0.060	6.0*	3.0*	2.2*	Det. Amp.	90 135 180	4.5 9.0 13.5	2.5 3.0 3.1	11,000 10,300 10,300	850 900 900	9.3 9.3 9.3	30
31	ST-12	Triode	4D-0-0	Filament	2.0	0.130	Power Amp.	135 180	22.5 30.0	8.0 12.3	4,100 3,600	925 1,050	3.8 3.8	7,000 5,700	185 375	31
32	ST-14	Tetrode	4K-0-3	Filament	2.0	0.060	.015m	5.3*	10.5*	R-F Amp. Detector	135 180 180	3.0 3.0 6.0#	67.5 67.5 67.5	1.7 1.7	0.4 0.4	950,000 1.2 Meg.	640 650 780	610	32
32L7GT	T-9	Diode Beam Pent.	8Z-0-0	Cathode	32.5	0.300	H-W Rect. Power Amp.	110	7.5	110	40	3.0	15,000	6,000	81	2,600	1,000	32L7GT
33	ST-14	Power Pent.	5K-0-0	Filament	2.0	0.260	1.0*	8.0*	12.0*	Power Amp.	135 180	13.5 18.0	135 180	14.5 22.0	3.0 5.0	50,000 55,000	1,450 1,700	70 90	7,000 6,000	700 1,400	33
34	ST-14	Pentode	4M-0-4	Filament	2.0	0.060	.015m	6.0*	11.0*	R-F Amp.	67.5 135 180	3.0 3.0 3.0	67.5 67.5 67.5	2.7 2.8 2.8	1.1 1.0 1.0	400,000 600,000 1 Meg.	560 600 620	224 360 620	34
EL34/6CA7	T-10 (SP)	Beam Pent.	8ET	Cathode	6.3	1.500	S.T. A1 Amp. P.P.AB1 Amp.	250 430	13.5 235*	250 425	100 125-140†	15 10-15†	15,000	11,000	2,000 6,600†	11,000 37,000	EL34/6CA7
35/51 35S/51S	ST-14	Tetrode	5E-0-3 5E-4-3	Cathode	2.5	1.750	.007m	5.3*	10.5*	R-F Amp. A-F Amp.	180 250 250*	3.0 3.0 1.0	90.0 90.0 45 to 67.5	6.3 6.5 0.5	2.5 2.5	300,000 400,000 2 Meg.	1,020 1,050	305 420	35/51 35S/51S
35A5	Lock-in	Beam Pent.	6AA-L-0	Cathode	35.0	0.150	Power Amp.	110 200	7.5 180#	110 110	40.0 43.0	3.0 2.0	14,000# 34,000#	5,800 6,100	2,500 5,000	1,500 3,000	35A5
35B5	T-5½	Beam Pent.	7BZ-0-0	Cathode	35.0	0.150	0.4*	11.0*	6.5*	Power Amp.	110	7.5	110	40.0	3.0	5,800	2,500	1,500	35B5
35C3	T-5½	Diode	7ET	Cathode	35.0	0.150	H-W Rect.	117 Volts RMS Per Plate, 100 Ma. D.C. Output. Condenser Input to Filter.										35C3	
35C5	T-5½	Beam Pent.	7CV-0-0	Cathode	35.0	0.150	0.6	Power Amp.	110	7.5	110	40	3.0	5,800	2,500	1,500	35C5
35CD6GA	T-12	Beam Pent.	5BT	Cathode	35.0	0.450	1.1*	22.0*	8.5*	Horiz. Defl. Amp.	Characteristics Same as Type 6CD6GA. (35CD6GA Designed for Series String TV Receivers).										35CD6GA	

35D5	T-6½	Beam Pent.	9FU	Cathode	35	0.150	0.3	13.7	6.7	S.T.A1 Amp.	110 170	200 ^m 190 ^m	110 170	30 52	2.5 3	18,000 20,000	8,000 9,500	2,500 2,500	1,600 4,800	35D5
35DZ8	T-6½	Tri. Beam Pent.	6DZ8	Cathode	35	0.150	A-F Voltage Amp. and Power Amp.	Characteristics Same as Type 6DZ8. (35DZ8 Designed for Series String Receivers).										
35L6GT	T-9	Beam Pent.	7S-0-0	Cathode	35.0	0.150	0.8*	13.0*	9.5*	Power Amp	110 200	7.5 8.0	110 110	40.0 43.0	3.0 2.0	14,000 [†] 34,000 [†]	5,800 6,100	2,500 5,000	1,500 3,000	35L6GT
35W4	T-5½	Diode	5BQ-0-0	Cathode	35.0	0.150	H-W Rect.	117 A-C Volts, RMS, 60 Ma. Output Current with Panel Lamp. 117 A-C Volts, RMS, 100 Ma. Output Current without Panel Lamp.										
35Y4	Lock-in	Diode	5AL-L-0	Cathode	35.0	0.150	H-W Rect.	235 Max. A-C Volts, RMS, 60 Ma. Output Current with Panel Lamp. 235 Max. A-C Volts, RMS, 100 Ma. Output Current without Panel Lamp.										


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. (4) Average Contact potential bias developed across specified grid resistor.
 (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output.
 I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
 † Plate and Target Supply Voltage.
 ‡ Maximum Signal.

□ Applied through 20,000 ohms.
 * Conversion Transconductance.
 ** Triode Operation.

†† Plate to Plate.
 ‡ Approximate.

m maximum.
 ° Cathode Resistor (ohms).

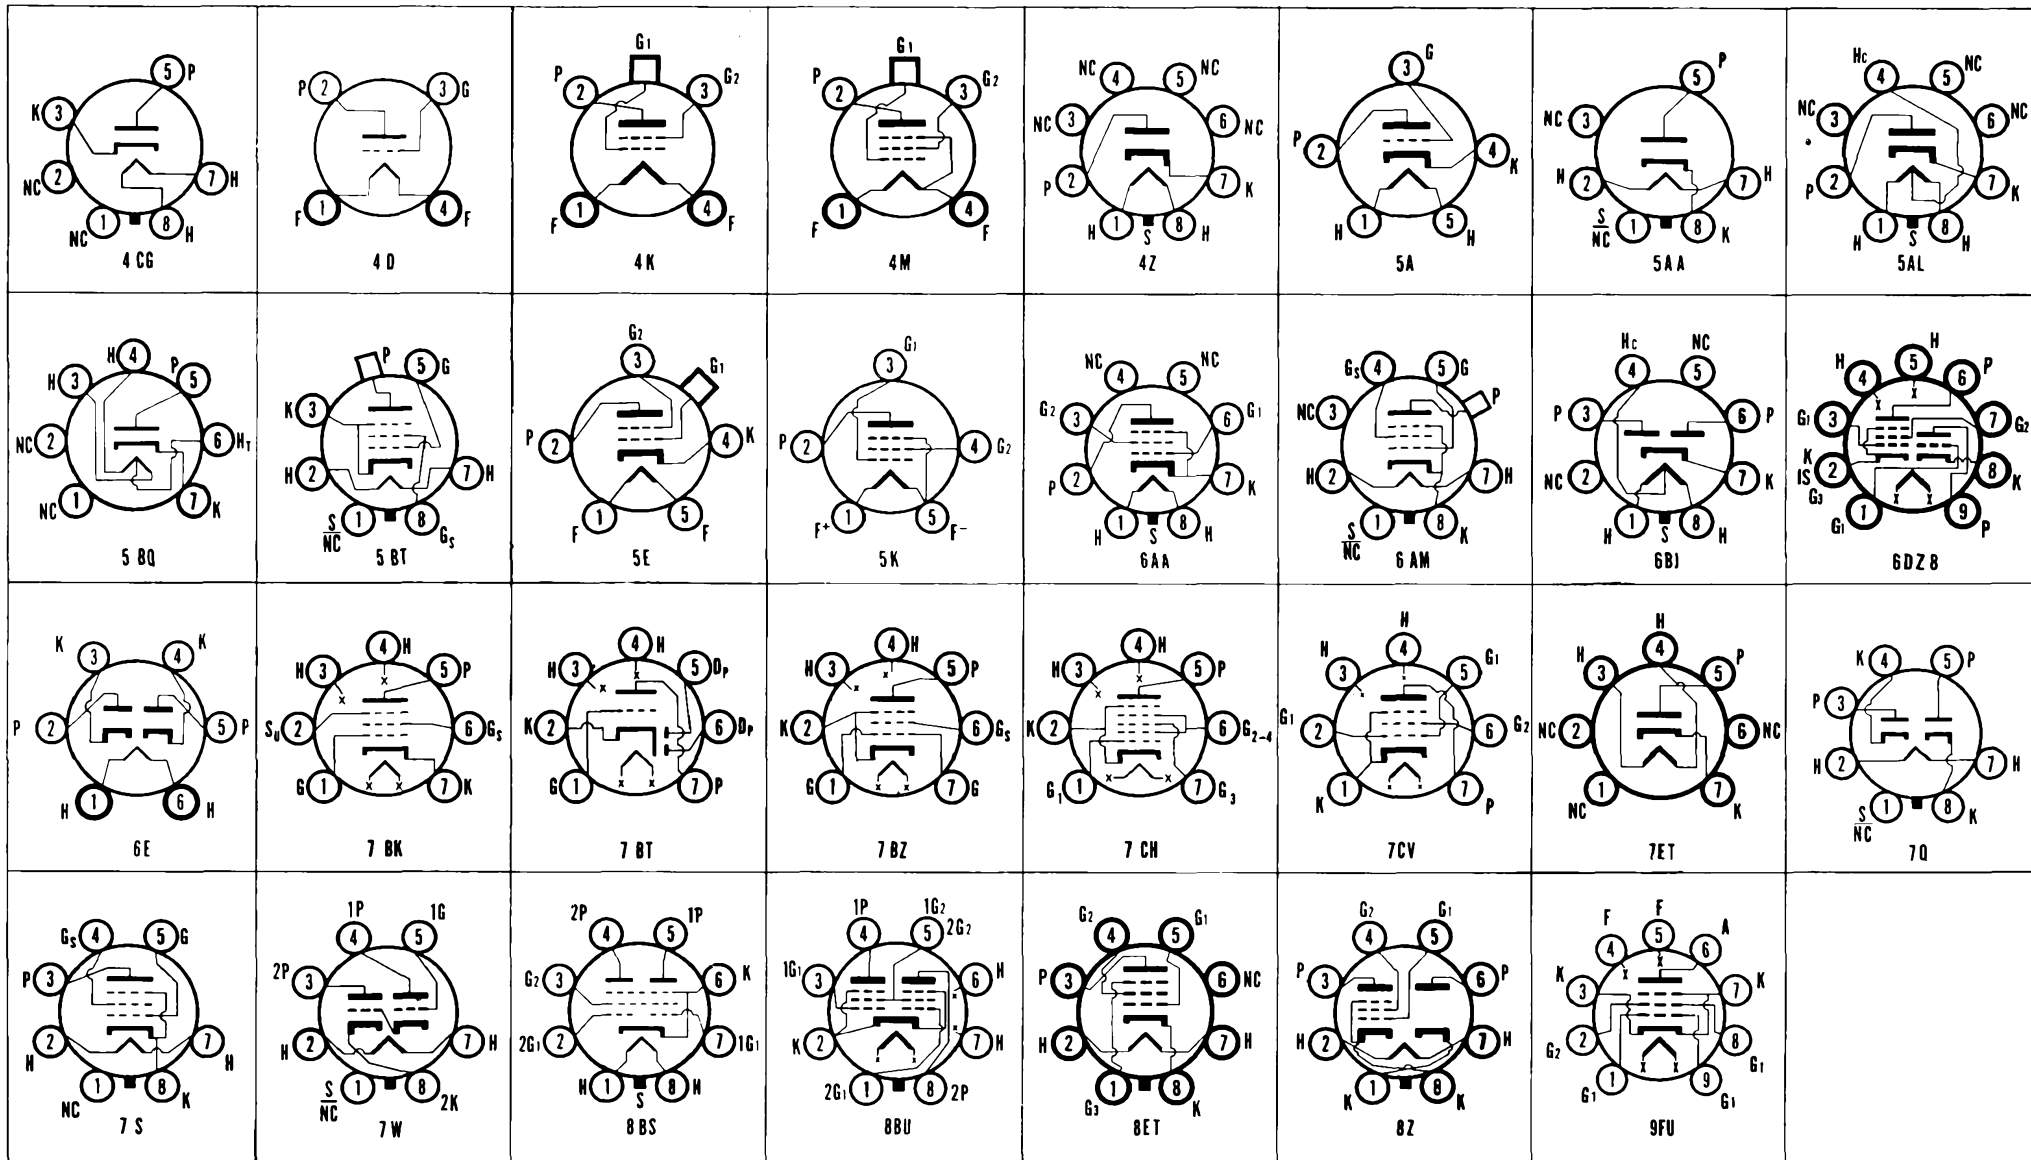

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\mu$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transcon- ductance Micromhos	Amplifi- cation Factor	Ohms Load for Rated Power Output	Undis- torted Power Output Milli- watts	Type
	Bulb Size or Style	Class	Base Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout												
35Z3	Lock-in	Diode	4Z-L-0	Cathode	35.0	0.150	H-W Rect.	235 Max. A-C Volts Per Plate, RMS, 100 Ma. Output Current. Condenser Input to Filter.										35Z3
35Z4GT	T-9	Diode	5AA-0-0	Cathode	35.0	0.150	H-W Rect.	117 A-C Volts, RMS, 100 Ma. Output Current. Condenser Input to Filter.										35Z4GT
35Z5GT	T-9	Diode	6AD-0-0	Cathode	35.0	0.150	H-W Rect.	Characteristics Same as Type 35Y4.										35Z5GT
35Z6G	ST-14	Duodiode	7Q-0-0	Cathode	35.0	0.300	Doubler H-W Rect.	117 A-C Volts Per Plate, RMS, 110 Ma. Output Current. 235 A-C Volts Per Plate, RMS, 110 Ma. Output Current Per Plate.										35Z6G
36	ST-12	Tetrode	5E-0-3	Cathode	6.3	0.300	.007m	3.7*	9.2*	R-F Amp. Detector	135 180 250 250	1.5 3.0 3.0 6.0 †	67.5 90.0 90.0 20 to 25	2.8 3.1 3.2	Not Over 1/2 of Plate Ma.	575,000 500,000 550,000	1,000 1,050 1,080	475 525 595	36
37	ST-12	Triode	5A-0-0	Cathode	6.3	0.300	2.0*	3.5*	2.9*	Amplifier	135 180 250	9.0 13.5 18.0	4.1 4.3 7.5	10,000 10,200 8,400	925 900 1,100	9.2 9.2 9.2	37
EL37	Curved Bulb	Beam Pent.	7S	Cathode	6.3	1.400	1.0*	17.5*	9.0*	S.T. A1 Amp. P.P.AB1 Amp.	250 400	13.5 36	250 400	100 100-276†	13.5 12-72†	13,500	11,000	2,500 3,250†	11,500 69,000	EL37
38	ST-12	Power Pent.	5F-0-0	Cathode	6.3	0.300	0.3*	3.5*	7.5*	Power Amp.	135 180 250	13.5 18.0 25.0	135 180 250	9.0 14.0 22.0	1.5 2.4 3.8	130,000 110,000 100,000	925 1,050 1,200	120 120 120	13,500 11,600 10,000	550 1,000 2,500	38
38A3	T-6 1/2	Diode	9BM	Cathode	38	0.100	H-W Rect.	250 A.C. Volts, RMS, 110 Ma. Max. Output Current.										38A3
39/44	ST-12	Pentode	5F-0-4	Cathode	6.3	0.300	.007m	3.5*	10.0*	R-F Amp. A-F Amp.	90 180 250 250	3.0 3.0 3.0 1.0	90.0 90.0 90.0 67.5	5.6 5.8 5.8 0.5	1.6 1.4 1.4	375,000 750,000 1 Meg.	960 1,000 1,050	360 750 1,050	39/44
40	ST-14	Triode	4D-0-0	Filament	5.0	0.250	8.0	2.8	2.2	Amplifier	135 180	1.5 3.0	0.2 0.2	150,000 150,000	200 200	30 30	40
40A1	T-9	Ballast	8ES	Horiz. Reg.	Avg. Operating Current—0 Ma. at 20 Volts; 150 Ma. at 40 Volts; 155 Ma. at 60 Volts.										40A1
40B2	T-9	Ballast	8ES	Horiz. Reg.	Avg. Operating Current—140 Ma. at 20 Volts; 150 Ma. at 40 Volts; 155 Ma. at 60 Volts.										40B2
40Z5/45Z5GT	T-9	Diode	6AD-0-0	Cathode	45.0	0.150	H-W Rect.	Characteristics Same as Type 35Y4.										40Z5/45Z5GT
41	ST-12	Power Pent.	6B-0-0	Cathode	6.3	0.400	Power Amp.	Characteristics Same as Type 6K6GT.										41
42	ST-14	Power Pent.	6B-0-0	Cathode	6.3	0.700	Power Amp.	Characteristics Same as Type 6F6G.										42
43	ST-14	Power Pent.	6B-0-0	Cathode	25.0	0.300	Power Amp.	Characteristics Same as Type 25A6GT.										43
45	ST-14	Triode	4D-0-0	Filament	2.5	1.500	7.0*	4.0*	3.0*	Power Amp.	180 250 275	31.5 50.0 56.0	31.0 34.0 36.0	1,650 1,610 1,700	2,195 2,175 2,050	3.5 3.5 3.5	2,700 3,900 4,600	830 1,600 2,000	45
45B5	T-6 1/2	Beam Pent.	9CV	Cathode	45.0	0.100	0.6*	12.0*	6.0*	Power Amp.	100 170	6.7 12.5	100 170	43.0 70.0	3.0 5.0	23,000 23,000	9,000 10,000	2,400 2,400	1.9 5.6	45B5
45Z3	T-5 1/2	Diode	5AM-0-0	Cathode	45.0	0.075	H-W Rect.	117 A-C Volts Per Plate, RMS, 65 Ma. Output Current.										45Z3
45Z5GT	Now Known as Type 40Z5/45Z5GT																				45Z5GT
46	ST-16	Power Tet.	5C-0-0	Filament	2.5	1.750	Power Amp.	250 300 400	33.0 0.0 0.0	Tie Gs to P Tie Gs to G Tie Gs to G	22.0 4.0# 6.0#	2,380 (Class B Operation) 2,350 (Class B Operation)	5.6	6,400 5,200† 5,800†	1,250 16,000 20,000	46	
47	ST-16	Power Pent.	5B-0-0	Filament	2.5	1.750	1.2*	8.6*	1.3*	Power Amp.	250 125	16.5 22.5	250 100	31.0 52.0	6.0 12.0	60,000 11,000	2,500 3,900	150 43	7,000 1,500 3,000	2,700 2,000 3,000	47
48	ST-16	Power Tet.	6A-0-0	Cathode	30.0	0.400	Power Amp.	95 125	20.0 22.5	95.0 100	52.0 52.0	12.0 12.0	4,000 11,000	3,900 3,900	15.6 43	1,500 1,500	2,000 3,000	48
49	ST-14	Power Tet.	5C-0-0	Filament	2.0	0.120	Power Amp.	135 180	20.0 0.0	Tie Gs to P Tie Gs to G	6.0 2.0#	4,175 (Two Tubes Class B Operation)	1,125 (Two Tubes Class B Operation)	4.7	11,000† 12,000†	170 3,500	49
50	ST-16	Triode	4D-0-0	Filament	7.5	1.250	7.1*	4.2*	3.4*	Power Amp.	300 350 400 450	54.0 63.0 70.0 84.0	35.0 45.0 55.0 55.0	2,000 1,900 1,800 1,800	1,900 2,000 2,100 2,100	3.8 3.8 3.8 3.8	4,600 4,100 3,670 4,350	1,600 2,400 3,400 4,600	50
50A1	T-6 1/2	Ballast	9CM	Fil. Ballast	Avg. Operating Current—52 Ma. at 30 Volts; 54 Ma. at 50 Volts; 56 Ma. at 65 Volts.										50A1
50A5	Lock-in	Beam Pent.	6AA-L-0	Cathode	50.0	0.150	Power Amp.	110 200	7.5 8.0	110 110	49.0 50.0	4.0 1.5	13,000 † 28,000 †	8,000 8,000	2,000 4,000	2,100 3,800	50A5
50AX6G	ST-14	Duodiode	7Q-0-0	Cathode	50.0	0.300	F-W Rect.	Characteristics Same as Type 6AX6G.										50AX6G
50B5	T-5 1/2	Beam Pent.	7BZ-0-0	Cathode	50.0	0.150	0.6*	13.0*	8.5*	Power Amp.	120	8	110	49	4.0	10,000	7,500	2,500	2,300	50B5
50BK5	T-6 1/2	Beam Pent.	9BQ-0-0	Cathode	50.0	0.150	0.6*	13.0*	5.0*	Power Amp.	250	5.0	250	35	3.5	0.1 Meg. †	8,500	6,500	3,500	50BK5
50BM8	T-6 1/2	Tri. Pentode	9EX	Cathode	50	0.100	4.2* 0.3*	2.7* 9.3*	4.3* 8.0*	A-F Tri. Amp. Power Amp.	100 100 200	0 6 16 100 200	3.5 26 35 5 7	28,000 15,000 20,000	2,500 6,800 6,400	70	3,900 5,600	1,050 3,500	50BM8
50C5	T-5 1/2	Beam Pent.	7CV-0-0	Cathode	50.0	0.150	0.6*	13.0*	8.5*	Power Amp.	120	8	110	49.	4.0	10,000	7,500	2,500	2,300	50C5
50C6G 50C6GA	ST-14 T-12	Beam Pent.	7S-0-0	Cathode	50.0	0.150	Power Amp.	Characteristics Same as Type 6Y6G.										50C6G 50C6GA
50CA5	T-5 1/2	Beam Pent.	7CV	Cathode	50	0.150	0.5*	15*	9*	Power Amp.	Characteristics Same as Type 6CA5.										50CA5
50DC4	T-5 1/2	Diode	5BQ	Cathode	50	0.150	H-W Rect.	117 A.C. Volts Per Plate, RMS, 110 Ma. Output Current. Heater Top Voltage (Pin 4 to Pin 6) = 7.5 Volts.										50DC4
50EH5	T-5 1/2	Beam Pent.	7CV	Cathode	50	0.150	0.65*	17*	9*	S.T. A1 Amp.	Characteristics Same as Type 6EH5.										50EH5
50L6GT	T-9	Beam Pent.	7S-0-0	Cathode	50.0	0.150	Power Amp.	Characteristics Same as Type 25L6GT.										50L6GT
50X6	Lock-in	Duodiode	7DX-L-0	Cathode	50.0	0.150	H-W Rect. Doubler	235 Volts RMS Per Plate, 75 Ma. D-C Output Per Plate. 117 Volts RMS Per Plate, 75 Ma. D-C Output.										50X6
50Y6GT	T-9	Duodiode	7Q-0-0	Cathode	50.0	0.150	F-W Rect.	Characteristics Same as Type 25Z6GT.										50Y6GT
50Y7GT	T-9	Duodiode	8AN-0-0	Cathode	46.0	0.150	Doubler H-W Rect.	117 A-C Volts, RMS, 65 Ma. Output with Panel Lamp. 150 A-C Volts, RMS, 65 Ma. Output Per Plate with Panel Lamp. 235 A-C Volts, RMS, 65 Ma. Output Per Plate with Panel Lamp.										50Y7GT

50Z6G	ST-12	Duodiode	7Q-0-0	Cathode	50.0	0.300	F-W Rect.	235 Volts RMS Per Plate, 250 Ma. D-C Output.								50Z6G		
50Z7G	ST-12	Duodiode	8AN-0-0	Cathode	50.0	0.150	Doubler H-W Rect.	117 A-C Volts Per Plate, RMS, 65 Ma. Output Current. With Current passing thru Panel Lamp Section. 235 A-C Volts, RMS, 65 Ma. Output Current Per Plate.								50Z7G		
EF50	Metal Glass	Pentode	9C-L-5 & 8	Cathode	6.3	0.300	.007m	8.0	5.0	R-F Amp.	250	160 ^m	250	10.0	3.1	600,000	6,300	EF50	
5Z	ST-14	Power Tet.	5C-0-0	Filament	6.3	0.300	Class A Amplifier Class B	110	0	43	G ₂ to P	1,750	3,000	5.2	2,000	1,500	5Z
VT5Z	S-17	Triode	4D-0-0	Filament	7.0	1.180	7.7	5.0	3.0	Amplifier	220	43.5	29.0	G ₁ to G ₂	Two Tubes in P.P.		10,000	5,000	VT5Z	
53	ST-14	Duotriode	7B-0-0	Cathode	2.5	2.000	Power Amp.	Characteristics Same as Type 6A6.								53		
55	ST-12	Duodiode Tri.	6G-0-5	Cathode	2.5	1.000	1.5*	1.5*	4.3*	Det. Amp.	Characteristics Same as Type 6V7G.								55		
55S			6G-5-5																55S		


(1) Values are given shielded unless marked with (*). (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (3) Has special mechanical and/or life characteristics. (4) Average Contact potential bias developed across specified grid resistor. Z Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
§ Plate and Target Supply Voltage.
† Maximum Signal.

□ Applied through 20,000 ohms.
▲ Conversion Transconductance.
** Triode Operation.

|| Plate to Plate.
♦ Approximate.

m maximum.
■ Cathode Resistor (ohms).

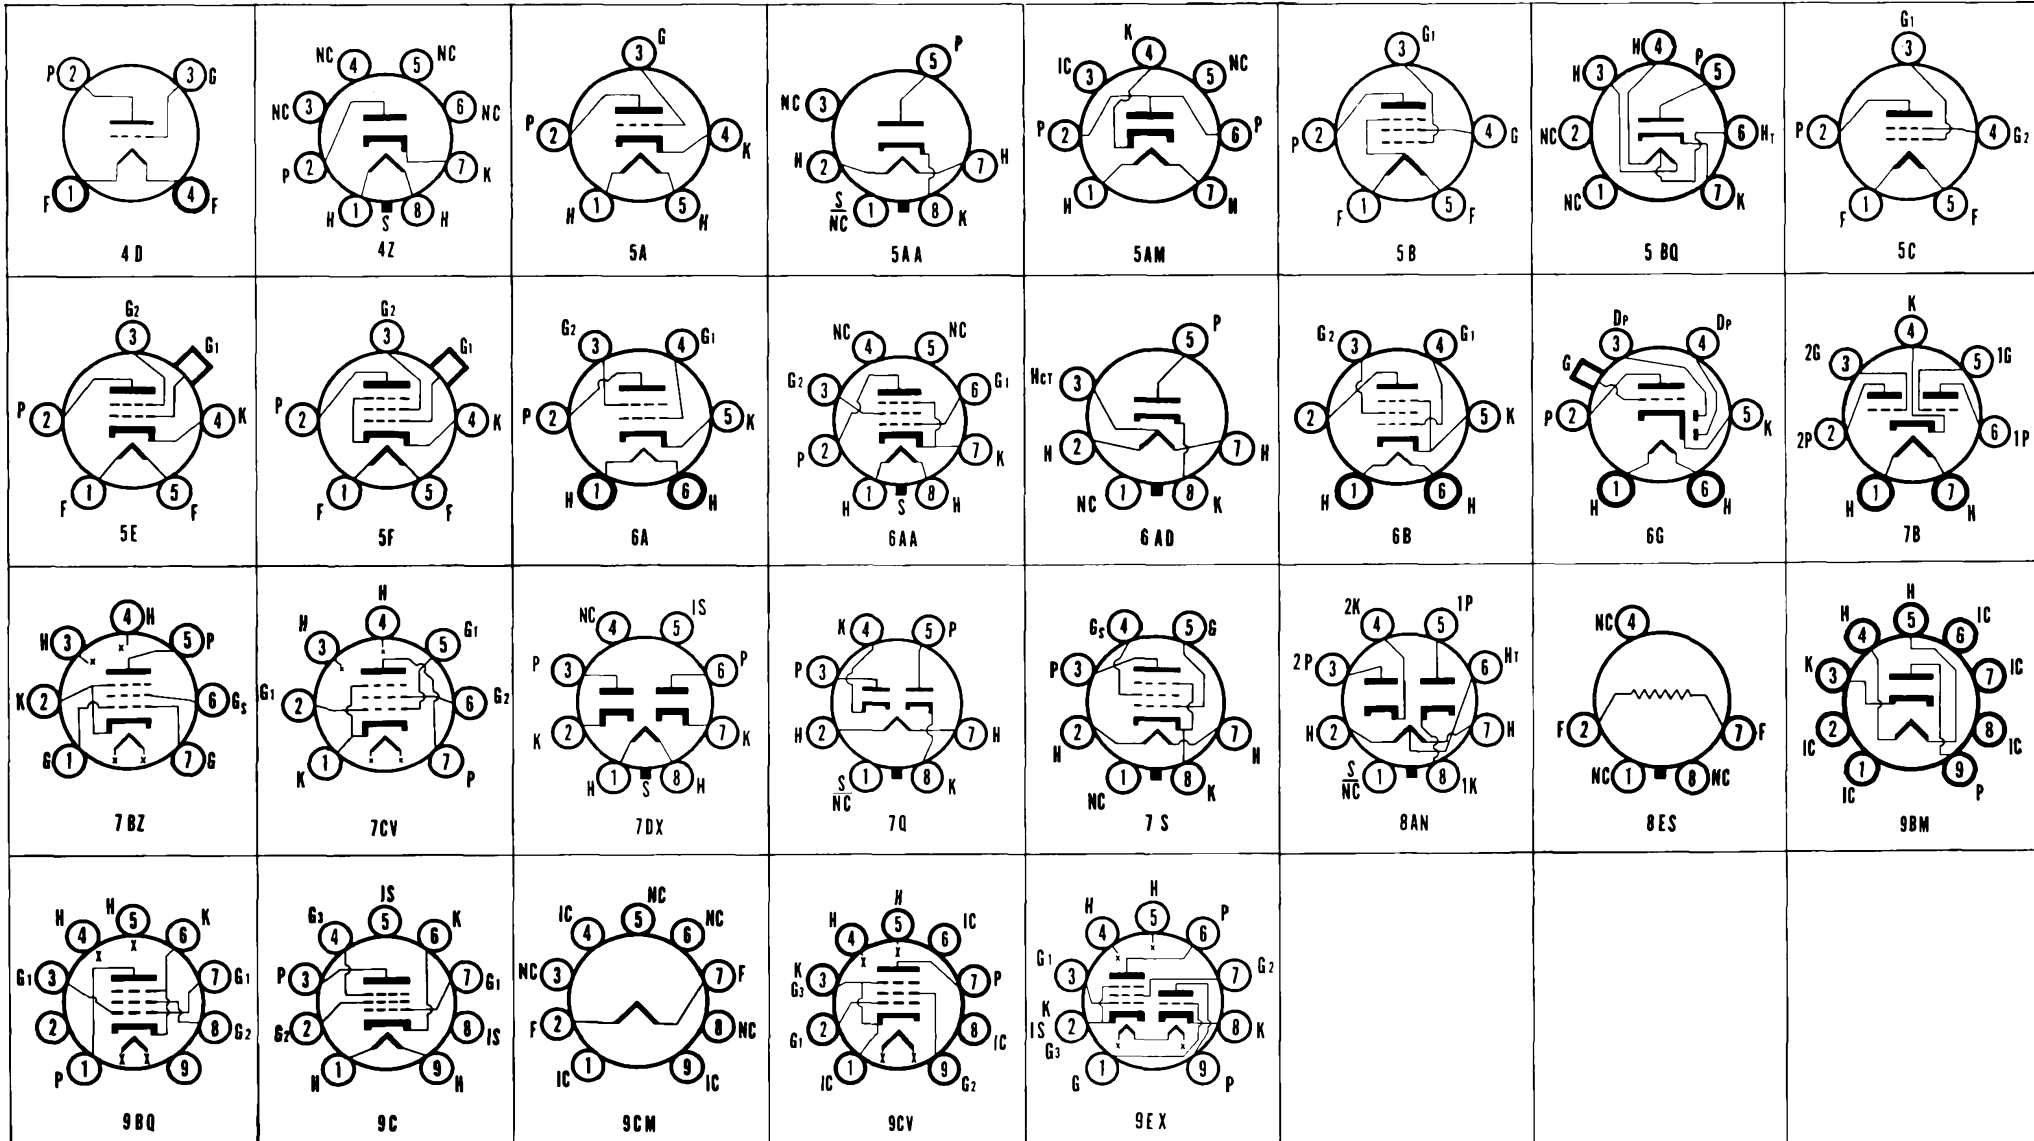

SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES - AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in μ i.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type							
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout																			
55N3	T-6½	Diode	9BM	Cathode	55	0.100	H-W Rect.	250 A.C. Plate Volts, R.M.S., 180 Ma. Output Current. Condenser Input to Filter.									55N3								
56	ST-12	Triode	5A-0-0 5A-4-0	Cathode	2.5	1.000	3.2*	3.2*	2.4*	Amplifier Detector	250	13.5	5.0	9,500	1,450	13.8	56							
56AS	ST-12	Triode	5A-4-0	Cathode	6.3	0.400	2.8*	3.5*	2.5*	Amplifier	Characteristics Same as Type 56.									56AS								
57	ST-12	Pentode	6F-0-5 6F-5-5	Cathode	2.5	1.000	.007m	5.0*	6.5*	R-F Amp. Detector	100 250	3.0 3.0	100 100	2.0 2.0	0.5 0.5	1 Meg. 1 Meg. >	1,185 1,225	57 57S							
57AS	ST-12	Pentode	6F-5-5	Cathode	6.3	0.400	.007*	5.0*	6.5*	R-F Amp.	Characteristics Same as Type 57.									57AS								
58	ST-12	Pentode	6F-0-5 6F-5-5	Cathode	2.5	1.000	.007m	4.7*	6.0*	R-F Amp.	100 250	3.0 3.0	100 100	8.0 8.2	2.2 2.0	250,000 800,000	1,500	58 58S							
58AS	ST-12	Pentode	6F-5-5	Cathode	6.3	0.400	.007*	4.7*	6.0*	R-F Amp.	Characteristics Same as Type 58.									58AS								
59	ST-16	Power Pent.	7A-0-0	Cathode	2.5	2.000	Power Amp.	250** 250 300** 400**	28.0 18.0 0.0 0.0	Tie Gs to P 250 Tie Gs to G 20.0 and Su to P 26.0	26.0 35.0 20.0 26.0	2,300 40,000 (Class B Operation Two Tubes)	2,600 2,500 100 (Class B Operation Two Tubes)	6.0 6,000 4,600 6,000%	5,000 6,000 1,250 3,000 15,000 20,000	59					
KT66	Curved Bulb	Beam Pent.	7S	Cathode	6.3	1.270	1.1*	16*	11.5*	S.T. A1 Amp. P.P.AB1 Amp.	250 450	15 250*	250 415	85 104-125†	6.3 5-18†	22,500	6,300	2,200 8,000%	7,250 30,000	KT66						
70A7GT	T-9	Diode Beam Pent.	8AB-0-0	Cathode	70.0	0.150	H-W Rect. Power Amp.	195 A-C Volts Per Plate, RMS, 60 Ma. Output Current.									70A7GT								
70L7GT	T-9	Diode Beam Pent.	8AA-0-0	Cathode	70.0	0.150	H-W Rect. Power Pent.	117 A-C Volts, RMS, 70 Ma. Output Current. Condenser Input to Filter.									70L7GT								
71A	ST-14	Triode	4D-0-0	Filament	5.0	0.250	7.5*	3.2*	2.9*	Power Amp.	90 135 180	16.5 27.0 40.5	10.0 17.3 20.0	2,170 1,820 1,750	1,400 1,650 1,700	3.0 3.0 3.0	3,000 3,000 4,800	125 400 790	71A						
75	ST-12	Duodiode Tri.	6G-0-5 6G-5-5	Cathode	6.3	0.300	1.7*	1.7*	3.8*	Det. Amp.	250	2.0	0.9	91,000	1,100	100	75 75S							
76	ST-12	Triode	5A-0-0	Cathode	6.3	0.300	2.8*	3.5*	2.5*	Amplifier Detector	250	13.5	5.0	9,500	1,450	13.8	76							
77	ST-12	Pentode	6F-0-3	Cathode	6.3	0.300	.007m	4.7*	11.0*	R-F Amp.	100 250	1.5 3.0	60.0 100	1.7 2.3	0.4 0.5	600,000 † 1.0 Meg. >	1,100 1,250	77							
78	ST-12	Pentode	6F-0-5	Cathode	6.3	0.300	.007m	4.5*	11.0*	R-F Amp.	90 180 250	3.0 3.0 3.0	90.0 75.0 100	5.4 4.0 7.0	1.3 1.0 1.7	300,000 † 1 Meg. † 800,000 †	1,275 1,100 1,450	78							
79	ST-12	Duotriode	6H-0-0	Cathode	6.3	0.600	Power Amp.	180 250	0.0 0.0	7.5# 10.5#	(Class B Operation) (Class B Operation)	7,000% 14,000%	5,500 8,000	79						
80	ST-14	Duodiode	4C-0-0	Filament	5.0	2.000	F-W Rect.	350 A-C Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter. 500 A-C Volts Per Plate, RMS, 125 Ma. Output Current. Choke Input to Filter.									80								
81	ST-16	Diode	4B-0-0	Filament	7.5	1.250	H-W Rect.	700 A-C Volts Per Plate, RMS, 85 Ma. Output Current. Condenser Input to Filter.									81								
82	ST-14	Duodiode	4C-0-0	Filament	2.5	3.000	F-W Rect.	450 A-C Volts Per Plate, RMS, 115 Ma. Output Current. Condenser Input to Filter.									82								
83	ST-16	Duodiode	4C-0-0	Filament	5.0	3.000	F-W Rect.	450 A-C Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.									83								
83V	ST-14	Duodiode	4AD-0-0	Cathode	5.0	2.000	F-W Rect.	375 A-C Volts Per Plate, RMS, 175 Ma. Output Current. Condenser Input to Filter.									83V								
84/6Z4	ST-12	Duodiode	5D-0-0	Cathode	6.3	0.500	F-W Rect.	325 A-C Volts Per Plate, RMS, 60 Ma. Output Current. Condenser Input to Filter.									84/6Z4								
EL84/6BQ5	T-6½	Beam Pent.	9CV	Cathode	6.3	0.760	0.5m*	10.8*	6.5*	S.T. A1 Amp. P.P.AB1 Amp.	250 300	135* 130*	250 300	48 72-92†	5.5 8-22†	38,000	11,300	5,200 8,000%	5,700 17,000	EL84/6BQ5						
85	ST-12	Duodiode Tri.	6G-0-5	Cathode	6.3	0.300	1.5*	1.5*	4.3*	Det. Amp.	Characteristics Same as Type 6V7G.									85								
85AS	ST-12	Duodiode Tri.	6G-5-5	Cathode	6.3	0.300	1.5*	1.5*	4.3*	Det. Amp.	250	9.0	4.5	16,000	1,250	20	85AS							
KT88	ST-16	Beam Pent.	7S	Cathode	6.3	1.800	P.P.AB1 Amp.	450	65	450	100-240†	(Plate and Grid No. 2 Current). Ultra-Linear Circuit			3,800%	65,000	KT88						
89	ST-12	Power Pent.	6F-0-0	Cathode	6.3	0.400	Power Amp.	160** 180 180	20.0 18.0 0.0	Gs & Su to P 17.0 20.0 3.0#	3,300 80,000	1,425 1,550	4.7 125	7,000 8,000 9,400%	300 1,500 3,500	89						
VR-90-105-150										Cold									Now Listed as OB3, OC3 and OD3.									VR-90-105-150
V-99	T-8	Triode	4E-0-0	Filament	3.3	0.063	3.5*	2.5*	2.2*	Det. Amp.	90	4.5	2.5	15,500	425	6.6	V99							
X99	T-9	Triode	4D-0-0	Filament	3.3	0.063	3.5*	2.5*	2.2*	Det. Amp.	90	4.5	2.5	15,500	425	6.6	X99							
117L7/M7GT	T-9	Diode Beam Pent.	8AO-0-0	Cathode	117	0.090	H-W Rect. Power Amp.	117 A-C Volts, RMS, 75 Ma. Output Current. Condenser Input to Filter.									117L7/M7GT								
117N7GT	T-9	Diode Beam Pent.	8AV-0-0	Cathode	117	0.090	H-W Rect. Power Amp.	117 A-C Volts, RMS, 75 Ma. Output Current. Condenser Input to Filter.									117N7GT								
117P7GT	T-9	Diode Beam Pent.	8AV-0-0	Cathode	117	0.090	H-W Rect. Power Amp.	117 A-C Volts Per Plate, RMS, 75 Ma. Output Current.									117P7GT								
117Z3	T-5½	Diode	4CB-0-0	Cathode	117	0.040	H-W Rect.	117 Volts Per Plate, RMS, 90 Ma. D-C Output.									117Z3								
117Z4GT	T-9	Diode	5AA-0-0	Cathode	117	0.040	H-W Rect.	117 A-C Volts Per Plate, RMS, 90 Ma. Output Current.									117Z4GT								
117Z6GT	T-9	Duodiode	7Q-0-0	Cathode	117	0.075	Volt. Dblr.	117 A-C Volts Per Plate, RMS, 60 Ma. Output Current.									117Z6GT								
182B/482B	ST-14	Triode	4D-0-0	Filament	5.0	1.250	Power Amp.	250	35.0	20.0	2,500	2,000	5.0	4,500	1,350	182B/482B						
183/483	ST-14	Triode	4D-0-0	Filament	5.0	1.250	Power Amp.	250	65.0	20.0	2,000	1,500	3.0	4,500	1,800	183/483						
210-T	ST-16	Triode	4D-0-0	Filament	7.5	1.250	7.0*	4.0*	3.0*	Power Amp.	(Standard Type 10 with Ceramic Base, See Type 10 Characteristics.)									210-T								
417A	T-6½	Triode	9V	Cathode	6.3	0.300	0.48*	9*	1.8*	UHF R-F Amp.	Characteristics Same as Type 5842.									417A								
485	ST-12	Triode	5A-0-0	Cathode	3.0	1.250	Det. Amp.	180	9.0	5.8	8,900	1,400	12.5	485							
807	ST-16	Beam Pent.	5AW-0-0	Cathode	6.3	0.900	0.2m	12.0*	7.0*	P.P.AB1 Amp.	400	45	60-140†	(Current and Output for Two Tubes)			3,000	15,000	807						
807W	T-12	Beam Pent.	5AW-0-0	Cathode	6.3	0.900	0.2m	12.0*	7.0*	P.P.AB2 Amp.	400 600	25 30	90-240† 60-200†	(Current and Output for Two Tubes) (Current and Output for Two Tubes)			3,200 6,400	55,000 80,000	807W						

864	T-9	Triode	4D-0-0	Filament	1.1	0.250	5.3*	3.3*	2.1*	Det. Amp.	90 135	4.5 9.0	2.9 3.5	13,500 12,700	610 645	8.2 8.2	864
884	ST-12	Gas Triode	6Q-0-0	Cathode	6.3	0.600	6.0*	2.0*	0.6*	Relay Tube	300	30	75	For Relay Operation Limit Time to 30 Secs. 300 Ma. Peak Current. 16 Volt Tube Drop.						884
885	ST-12	Gas Triode	5A-0-0	Cathode	2.5	1.500	6.0*	2.0*	0.6*	Relay Tube	Characteristics Same as Type 884.										885
950	ST-14	Beam Pent.	5K-0-0	Filament	2.0	0.120	Power Amp.	135	16.5	135	7.0	2.0	125,000	1,000	125	13,500	575	950
954	Acorn	Pentode	5BB-0-0	Cathode	6.3	0.150	.007m	3.4	3.0	R-F Amp.	90 250	3.0 3.0	90 100	1.2 2.0	0.5 0.7	1 Meg. 1 Meg. >	1,100 1,400	954
955	Acorn	Triode	5BC-0-0	Cathode	6.3	0.150	1.3	1.0	0.4	Osc. Amp.	250 90	7.0 2.5	6.3 2.5	11,400 14,700	2,200 1,700	25 25	955


(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics.
 (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor.
 † Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

Per Tube or Section.
 S Plate and Target Supply Voltage.
 † Maximum Signal.

□ Applied through 20,000 ohms.
 ▲ Conversion Transconductance.
 ** Triode Operation.

¶ Plate to Plate.
 † Approximate.

m maximum.
 ■ Cathode Resistor (ohms).

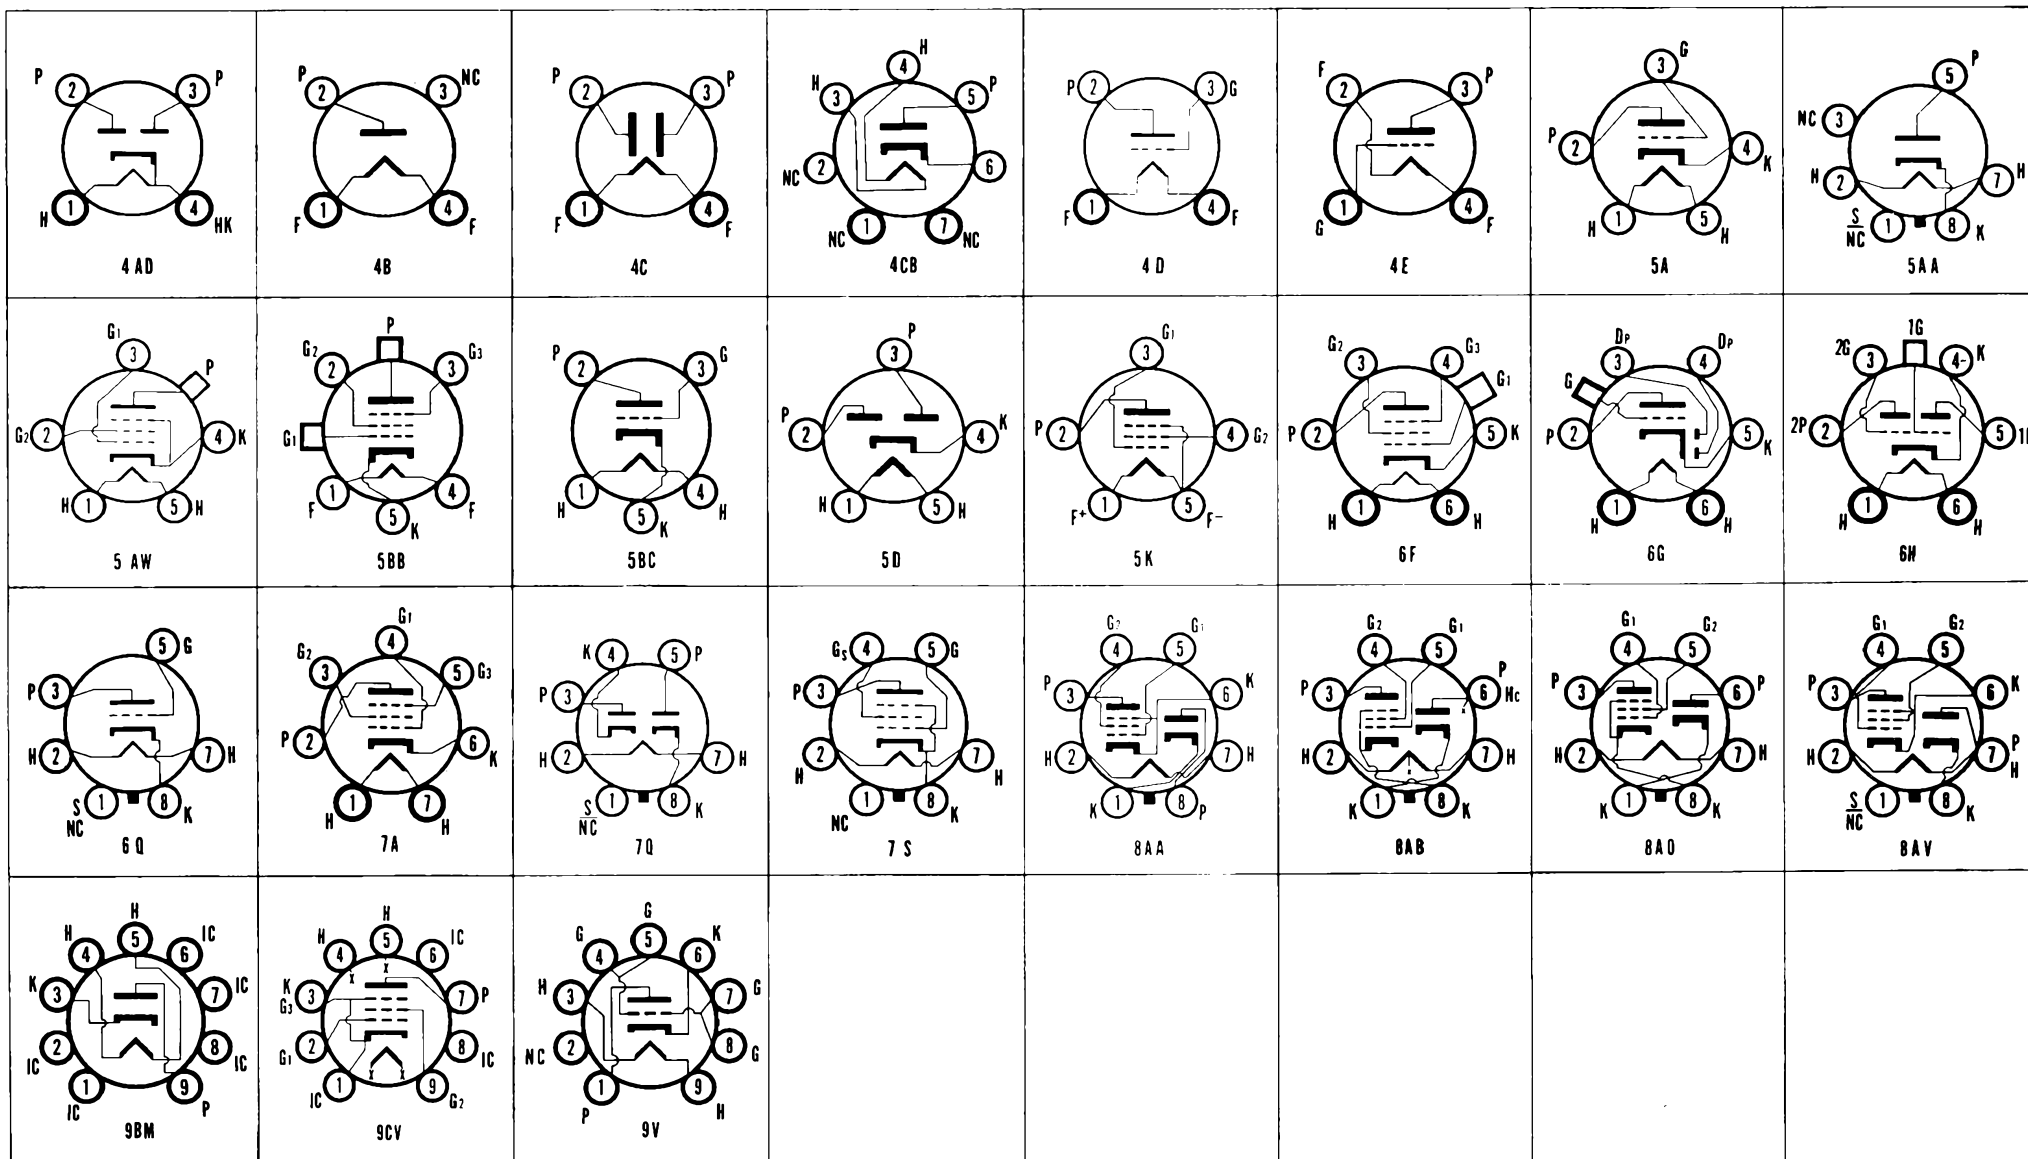


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

PENNSYLVANIA TUBES — AVERAGE CHARACTERISTICS


Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	Cin.	Cout.												
956	Acorn	Pentode	5BB-0-0	Cathode	6.3	0.150	.007m	3.4	3.0	R-F Amp.	250	3.0	100	6.7	2.7	700,000 †	1,800	956
957	Acorn	Triode	5BD-0-0	Filament	1.2	0.050	1.2	0.3	0.7	Osc. Amp.	135	5.0	2.0	20,800 †	650	12	957
958-A	Acorn	Triode	5BD-0-0	Filament	1.25	0.100	2.6	0.6	0.8	Osc. Amp.	135	7.5	3.0	10,000	1,200	12	958-A
959	Acorn	Pentode	5BE-0-0	Filament	1.25	0.050	.015m	1.8	2.9	R-F Amp.	135	3.0	67.5	1.7	0.4	800,000 †	600	959
FM1000	Lock-in	Heptode	FM1000	Cathode	6.3	0.300	F-M Det.	FM1000
1005/CK1005	Metal	Gas Duodi.	5AQ-0-1	Filament	6.3	0.100	F-W Rect.	450 Max. Peak Inverse V., 210 Ma. Max. Peak Current, 70 Ma. Avg. Current D-C. Avg. Tube Drop = 20.										1005/CK1005
1201	Now Known as Type 7E5																				1201
1203-A	Now Known as Type 7C4																				1203-A
1204	Now Known as Type 7AB7																				1204
1206	Now Known as Type 7G8																				1206
1221	ST-12	Pentode	6F-0-5	Cathode	6.3	0.300	Amplifier	Special Non-Microphonic Tube, Characteristics Same as Type 6C6.										1221
1222	ST-14	Beam Pent.	1222	Cathode	6.3	0.900	Power Amp.	Characteristics Similar to Type 6L6GA.										1222
1223	ST-12	Pentode	7R-0-0	Cathode	6.3	0.300	Amplifier	"G" Equivalent of Type 1221 Above.										1223
1229	ST-12	Tetrode	4K-0-0	Filament	2.0	0.060	Special Type 32. Made for Low Grid Current Application.										1229	
1230	T-9	Triode	4D-0-0	Filament	2.0	0.060	6.0*	3.0*	2.1*	Special Type 30. Made for Low Grid Current Applications.										1230	
1231	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.450	.015m	8.5	6.5	R-F Amp. Tet. Amp.	300 300	200 [#] 200 [#]	150 150	10.0 12.0	2.5 0.5	700,000 540,000	5,500 6,500	3,850 3,500	1231
1232	Now Known as Type 7G7																				1232
1236A	T-9	Diode	1236A	Filament	1.9	0.450	Regulator	Plate Voltage = 330 Volts (Abs. Max.). D.C. Current = 0.8 Ma. (Abs. Max.). Plate Current = 0.63 Ma. Plate Load Resistance = 0.25 Meg.										1236A
1238	T-9	Duo. Beam Amplifier	8BS-L-0	Cathode	28.0	0.400	Amplifier	Characteristics Similar to 28D7.										1238
1247	T-3	Diode	1247	Filament	0.7	0.065	R-F Probe	300 A-C Volts RMS, 0.4 Ma. D-C Plate Current.										1247
1265	ST-12	Diode	4AJ-0-0	Cold K	Voltage Reg.	Starting Voltage = 135, Operating Voltage = 90, Operating Current = 5 to 30 Ma.										1265
1266	T-9	Diode	4AJ-0-0 No Jumper	Cold K	Regulator	Voltage Regulator Similar to Type OB3/VR-90-30, Except Regulating at 70 Volts.										1266
1267	T-9	Gas Triode	4V-0-0	Cold K	Relay Tube	Similar to Type OA4G.										1267
1273	Lock-in	Pentode	8V-L-5	Cathode	6.3	0.300	.004m	6.0	6.5	Amplifier	Characteristics Same as Type 14C7 (Special Non-Microphonic Tube)										1273
1274	T-9	Duodiode	6S-0-0	Cathode	6.3	0.600	F-W Rect.	Characteristics Same as Type 774.										1274
1275	ST-16	Duodiode	4C-0-0	Filament	5.0	1.750	F-W Rect.	Similar to Type 5Z3.										1275
1276	ST-16	Triode	4D-0-0	Filament	4.5	1.140	Power Amp.	Similar to Type 6A3.										1276
1280	Lock-in	Pentode	8V-L-5	Cathode	12.6	0.150	.004m	6.0	6.5	Amplifier	Characteristics Same as Type 14C7 (Special Non-Microphonic Tube).										1280
1284	Lock-in	Pentode	8V-L-5	Cathode	12.6	0.150	.01	5.0	6.0	R-F Amp.	250	3	100	9.0	2.5	800,000	200	1284
1291	Now Known as Type 3B7																				1291
1293	Lock-in	Triode	4AA-L-0	Filament	1.4	0.110	1.7	1.7	3.0	Oscillator	90 90	0 20	5.2 13.25	1,500	15	1293
1294	Now Known as Type 1R4																				1294
1299	Now Known as Type 3D6																				1299
1612	Metal	Heptode	7T-1-0	Cathode	6.3	0.300	.001m	7.5	11.0	Mixer Amp.	Characteristics Same as Type 6L7.										1612
1614	T-10 Sp.	Beam Pent.	7S	Cathode	6.3	0.900	0.4m*	10*	12*	P.P.AB1 Amp.	360 530	22.5 36	270 340	88-132† 60-160†	15† 20†	6,600 7,200	26,500 50,000	1614
1625	ST-16	Beam Pent.	5AZ	Cathode	12.6	0.450	0.2m*	11*	7*	P.P.AB1 Amp. P.P.AB2 Amp.	**Characteristics Same as Type 807.										1625
1626	ST-12	Triode	6Q-0-0	Cathode	12.6	0.250	4.4*	3.2*	3.4	Oscillator	250	70	25	Class C, Oscillator or Amplifier.					4,000	1626
1629	T-9	Electron Ray	7AL-0-0	Cathode	12.6	0.150	Indicator	Characteristics Same as Type 6E5.										1629
2050	ST-12	Gas Tetrode	6BS-0-0	Cathode	6.3	0.600	0.26*	4.2*	3.6*	Relay Tube	400 220	5.0 4.0	0 0	100 75	For Relay Operation Limit Time to 30 Secs. 1 Amp. Peak Current, 8 Volts Tube Drop.					2050	
2051	ST-12	Gas Tetrode	6BS-0-0	Cathode	6.3	0.600	0.26*	4.2*	3.6*	Relay Tube	220	4.0	0	75	For Relay Operation Limit Time to 30 Secs. 375 Ma. Peak Current, 8 Volts Tube Drop.					2051	
5517/CK1013	T-5½	Gas Diode	5-BU	Cold K	H-W Rect.	2800 Max. Peak Inverse V., 50 Ma. Max. Peak Current, 6 Ma. Avg. Current D-C, Avg. Tube Drop = 100.										5517/CK1013
5590	T-5½	Pentode	7BD-0-0	Cathode	6.3	0.150	.01	3.4	2.9	R-F Amp.	90	820 [#]	90	3.9	1.4	300,000	2,000	600	5590
5591	T-5½	Pentode	7BD-0-0	Cathode	6.3	0.150	.02	4.0	2.8	R-F Amp.	120 150 180	200 [#] 330 [#] 200 [#]	120 140 120	7.5 7.0 7.7	2.5 2.2 2.4	340,000 420,000 690,000	5,000 4,300 5,100	1,700 1,800 3,500	5591
5608-A	ST-14	Duotriode	7B-0-0	Cathode	2.5	2.000	Amplifier#	250 300	5 6	5.0 6.0	14,000 13,000	2,200 2,450	31.5 32	5608-A
5633 (3)	T-3	Pentode	5633	Cathode	6.3	0.150	.01m	4.0	2.8	R-F Amp.	100	150 [#]	100	7.0	2.8	200,000	3,400	5633 (3)
5634 (3)	T-3	Pentode	5633	Cathode	6.3	0.150	.01m	4.4	2.8	R-F Amp.	100	150 [#]	100	6.5	2.5	240,000 †	3,500	5634 (3)
5635 (3)	T-3	Duotriode	8DB-0-0	Cathode	6.3	0.450	1.2	2.6	1.6	Amplifier	100	100 [#]	4.8	10,000	3,800	38	5635 (3)
5636 (3)	T-3	Pentode	8DC-0-0	Cathode	6.3	0.150	.015m	4.0	3.4	Mixer	100	150 [#]	100	3.6	5.3	320,000	1,280 [▲]	5636 (3)
5637 (3)	T-3	Triode	8DK-0-0	Cathode	6.3	0.150	1.3	2.8	3.2	Amplifier	100	820 [#]	1.4	26,000	2,700	70	5637 (3)
5638 (3)	T-3	Pentode	5638	Cathode	6.3	0.150	0.19	4.0	6.5	Amplifier	100	270 [#]	100	4.8	1.25	150,000	3,300	5638 (3)
5639 (3)	T-3	Beam Pent.	8DL-0-0	Cathode	6.3	0.450	0.1m	9.5	7.5	Power Amp.	150	100 [#]	100	21	4	50,000	9,000	1,000	5639 (3)

(1) Values are given shielded unless marked with (*). (2) Converter tube capacitances given are signal grid to plate; RF input, Mixer Output. (3) Has special mechanical and/or life characteristics. (4) Average Contact potential bias developed across specified grid resistor. X Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

† Per Tube or Section. ‡ Plate and Target Supply Voltage. § Maximum Signal. ¶ Applied through 20,000 ohms. ▲ Conversion Transconductance. †† Triode Operation. ‡‡ Plate to Plate. ††† Approximate. m maximum. # Cathode Resistor (ohms).

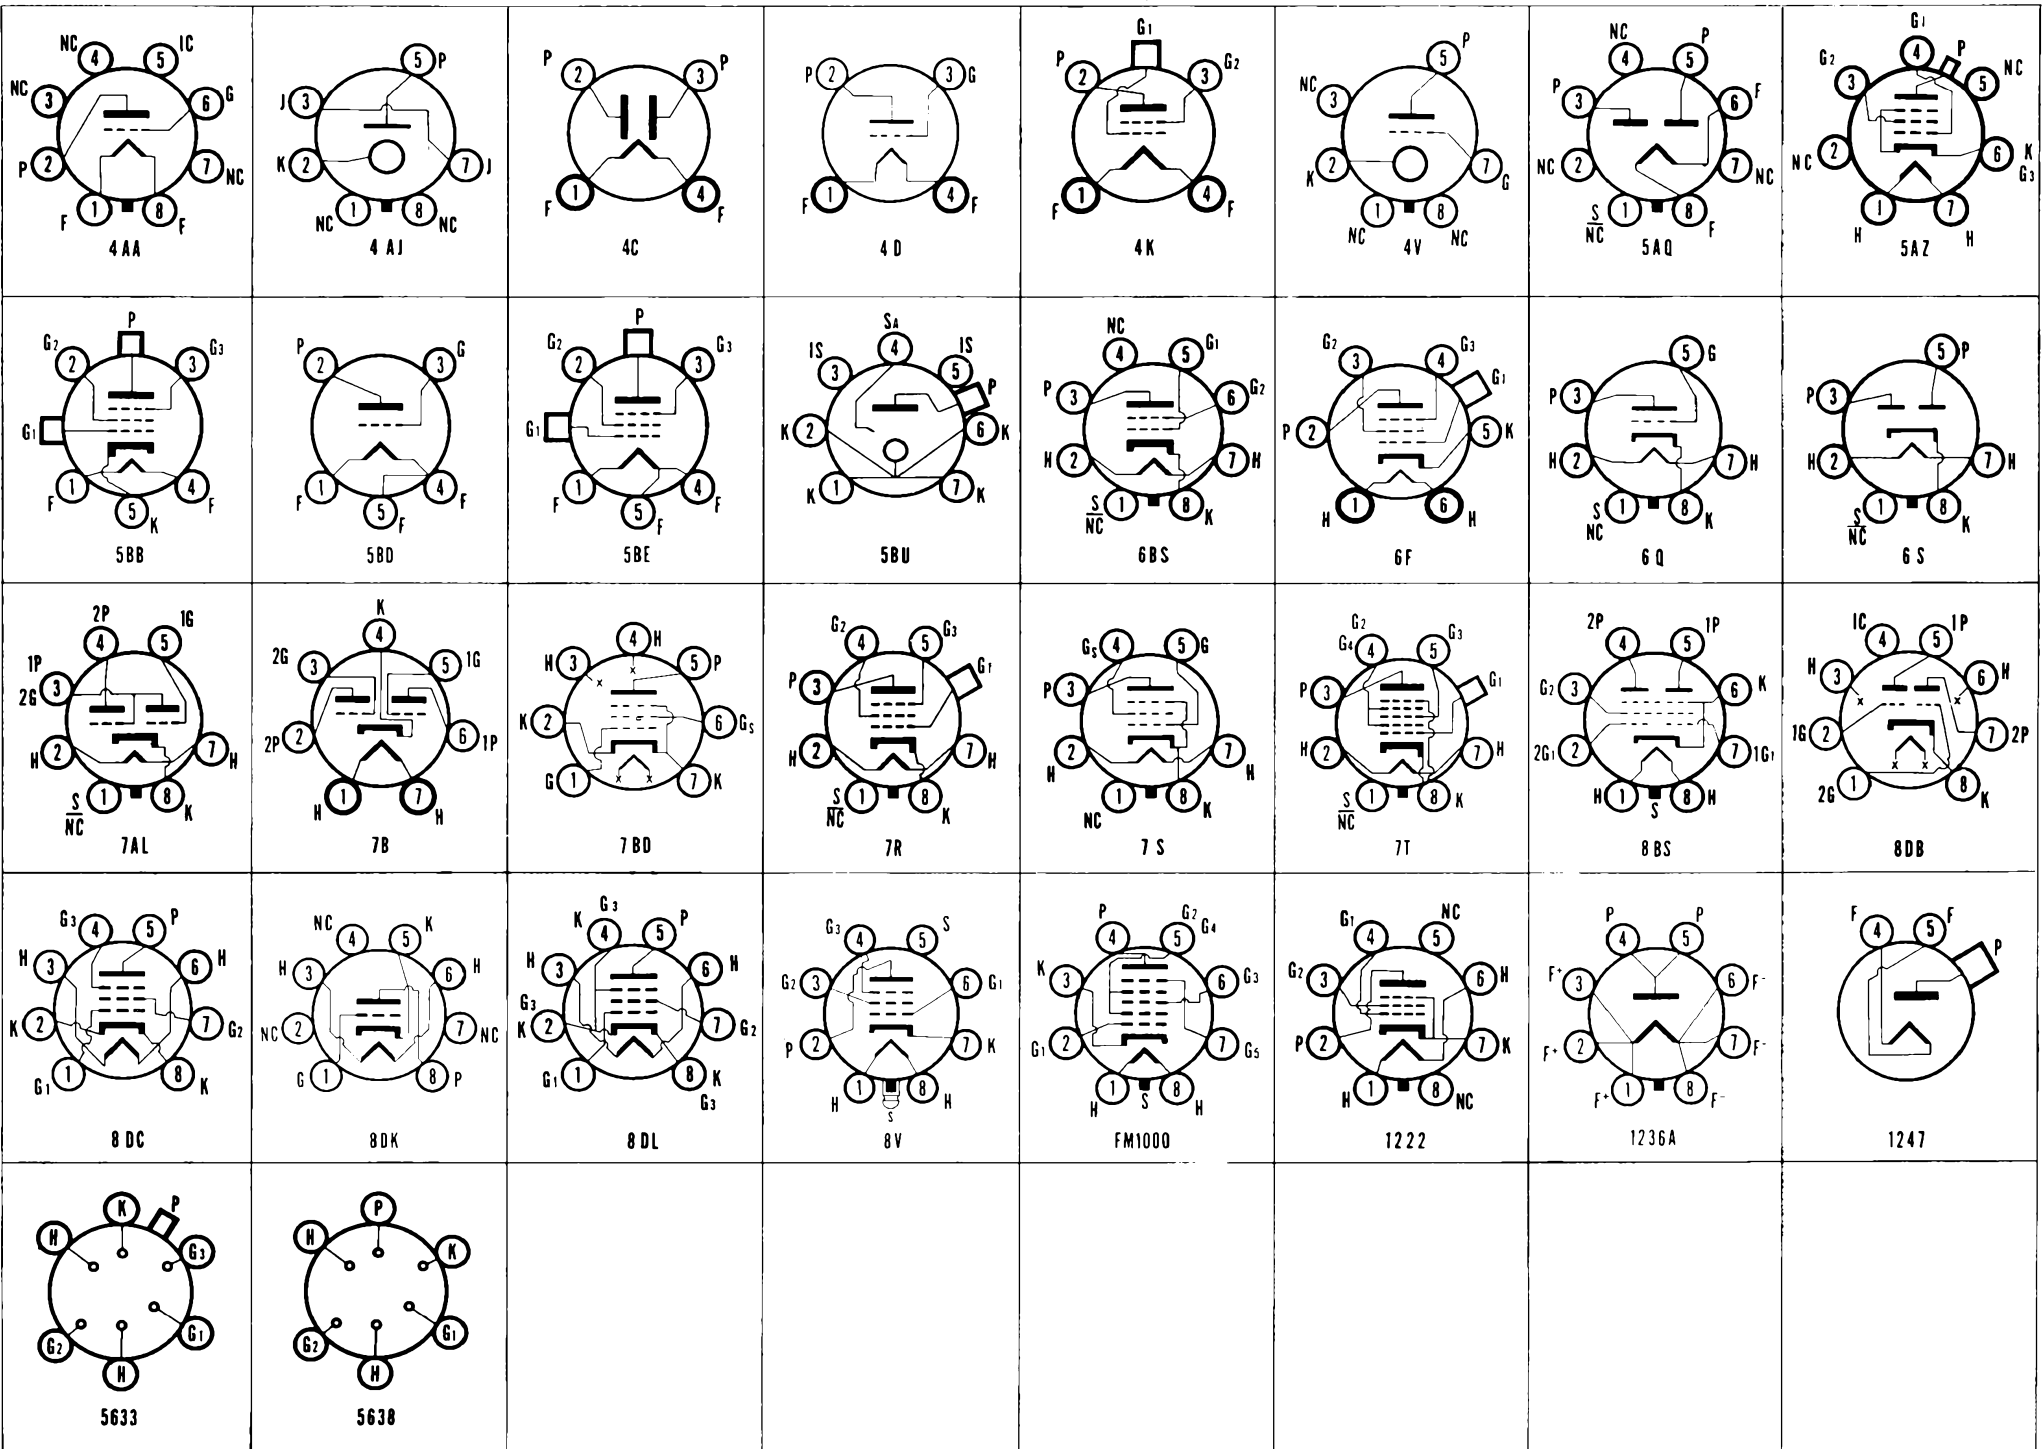


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

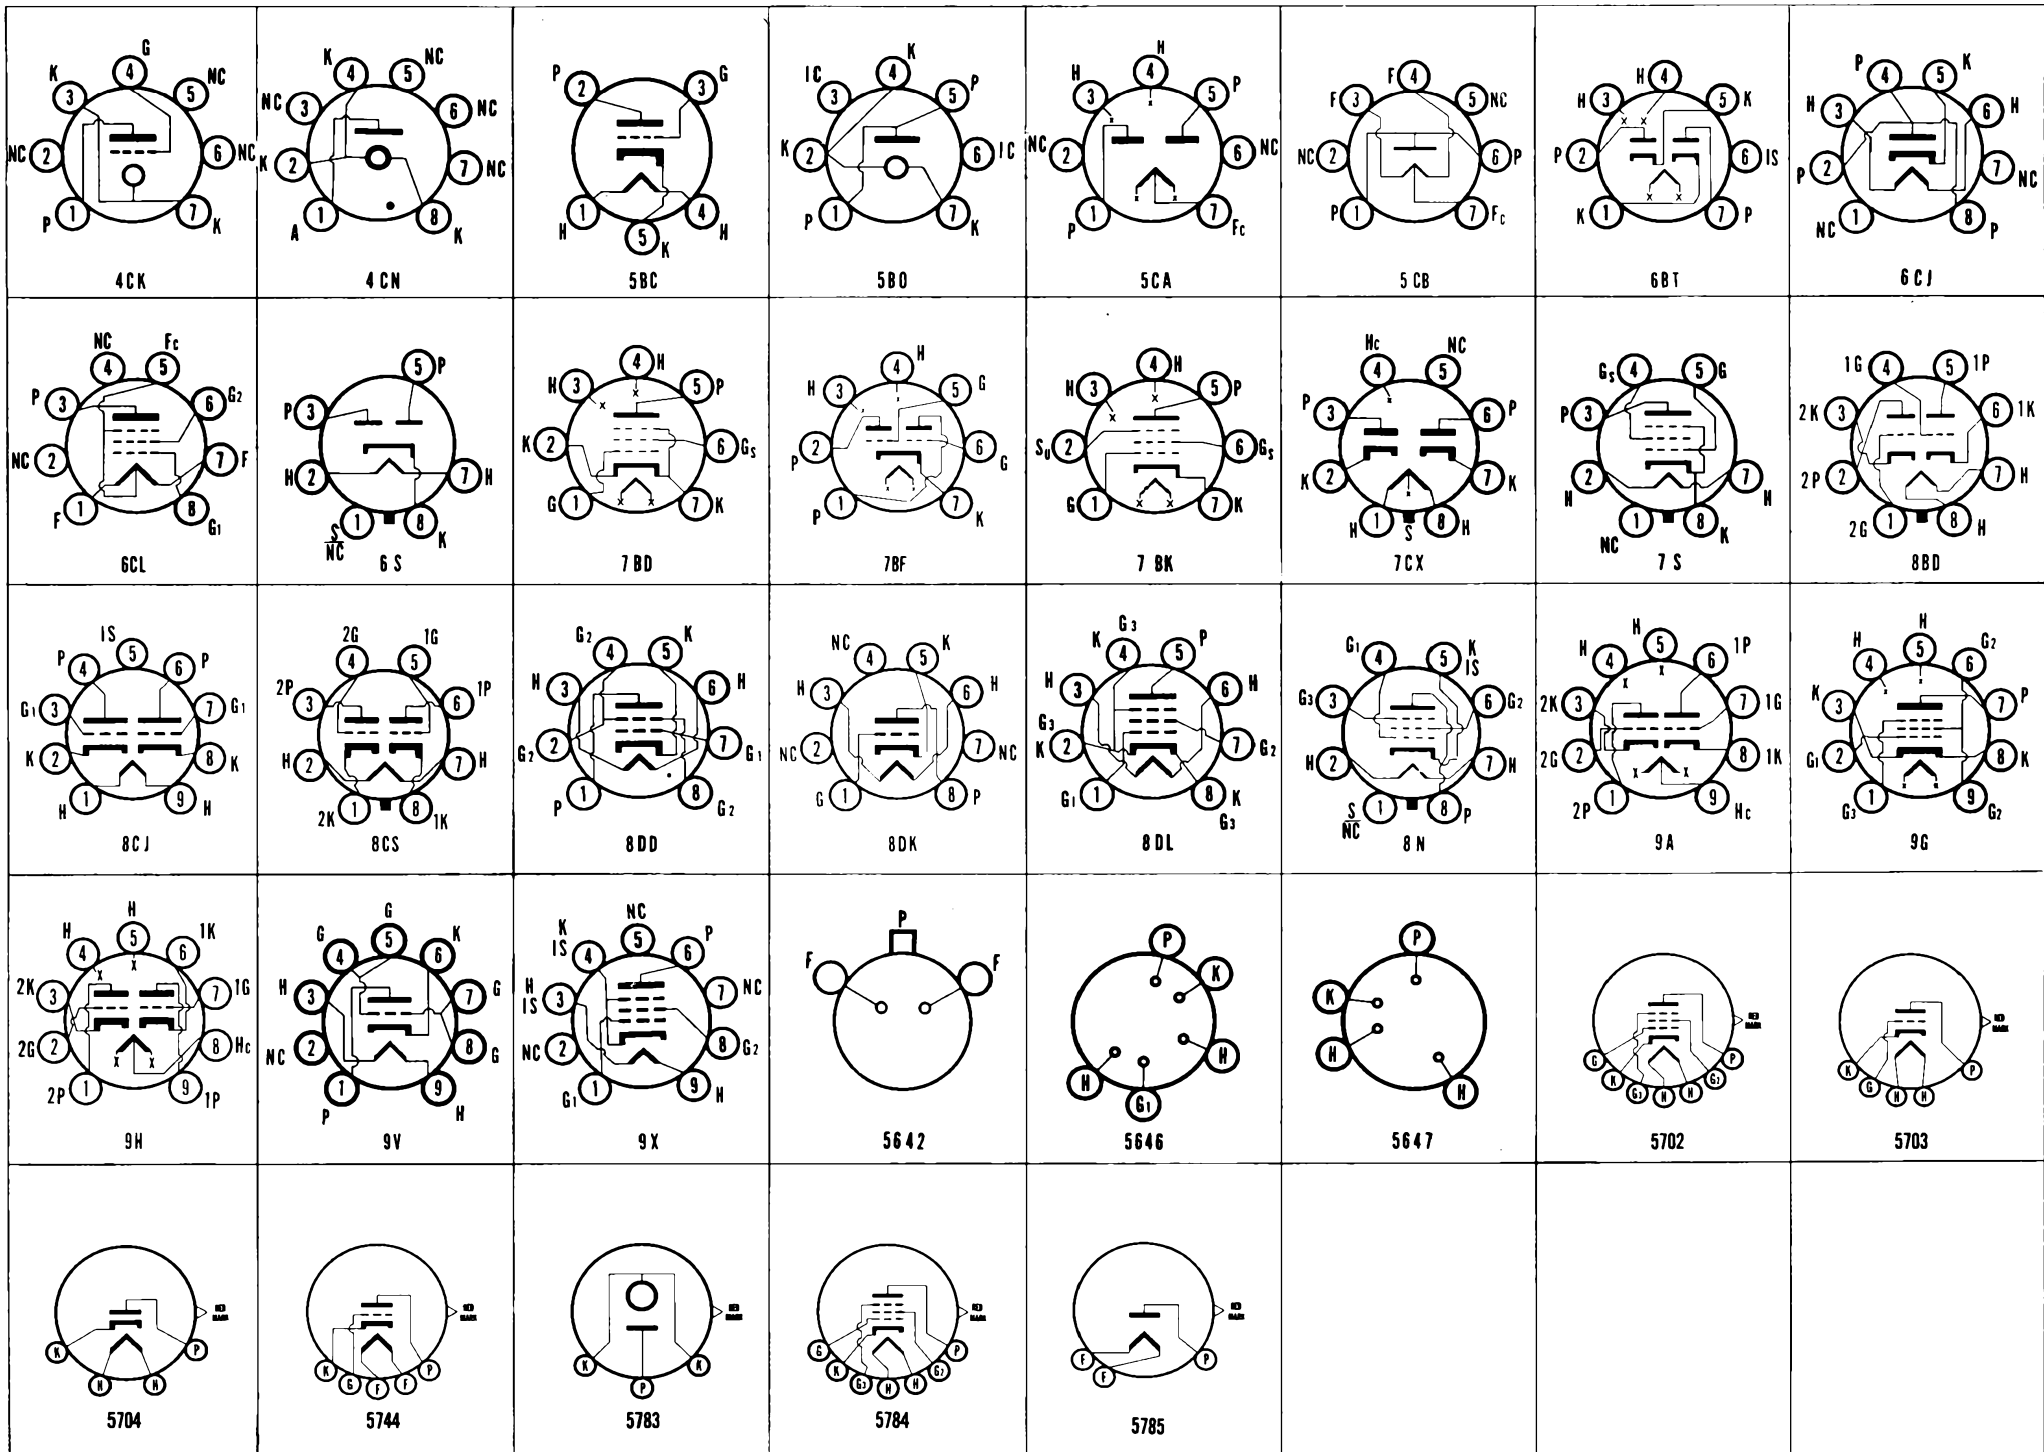

SYMBOLS FOR BASE DIAGRAMS: D_p—Diode Plate; F—Filament; F_c—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; H_c—Heater Center; H_t—Heater Tap; IC—Internal Connection, DO NOT USE; J—Jumper; K—Cathode; NC—No Connection; P—Plate; R_c—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; X_s—External Shield; □—Top Cap; ■—Locating Key.

6147	T-3	Power Pent.	6CL	Filament	1.25	0.125	.055	2.6	3.0	VHF Power Amplifier	125	7.5	125	5.5	0.9	175,000	1,600	6147
6205 (3)	T-3	Pentode	8DC-0-2&8	Cathode	6.3	0.150	.015	4.2	3.4	U-H-F Amp.	100	150 ^m	100	7.5	2.4	0.26 Meg.	5,000	6205 (3)
6206	T-3	Pentode	8DC	Cathode	6.3	0.150	.015	4.2	3.4	U-H-F Amp.	100	120 ^m	100	7.5	2.0	0.26 Meg.	4,500	Semi-Remote Cutoff.			6206 (3)
6287 (3)	T-6½	Beam Pent.	9CT-0-0	Cathode	6.3	0.600	1.1m	8.0	9.0	Audio Amp.	250	12.5	250	46	5.0	55,000	4,100	6,000	4,500	6287 (3)
6308 (3)	T-3	Gas Diode	8EX-0-0	Cold K	Voltage Regulator with Starting Voltage at 115 Volts, Operating Voltage at 87 Volts and Current at 3.5 Ma. Max.										6308 (3)	
6336A	TT-16	Duo Power Triode	8BD	Cathode	6.3	5.000	21.8*	16.7*	3.8*	Passing Tube For V.R. Service	190	200 ^m	182#	300	13,500	2.7	30 Watts Plate Dissipation#			6336A
										RK =	200 Ohm Per Section,	RG =	500 Ohm Per Section.								
6350	T-6½	Duotriode	9CZ-0-0	Cathode	6.3	0.600	3.2*	3.6*	0.6*	Computer #	150	5.0	11.0	3,900	4,600	18	6350
					12.6	0.300												

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. # Per Tube or Section.
 (2) Converter tube capacitances given are signal grid to plate; RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor. † Plate and Target Supply Voltage.
 ‡ Maximum Signal. □ Applied through 20,000 ohms.
 I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.) * Triode Operation. ▲ Conversion Transconductance.
 †† Plate to Plate. ‡ Approximate. ■ Cathode Resistor (ohms).
 ††† maximum.

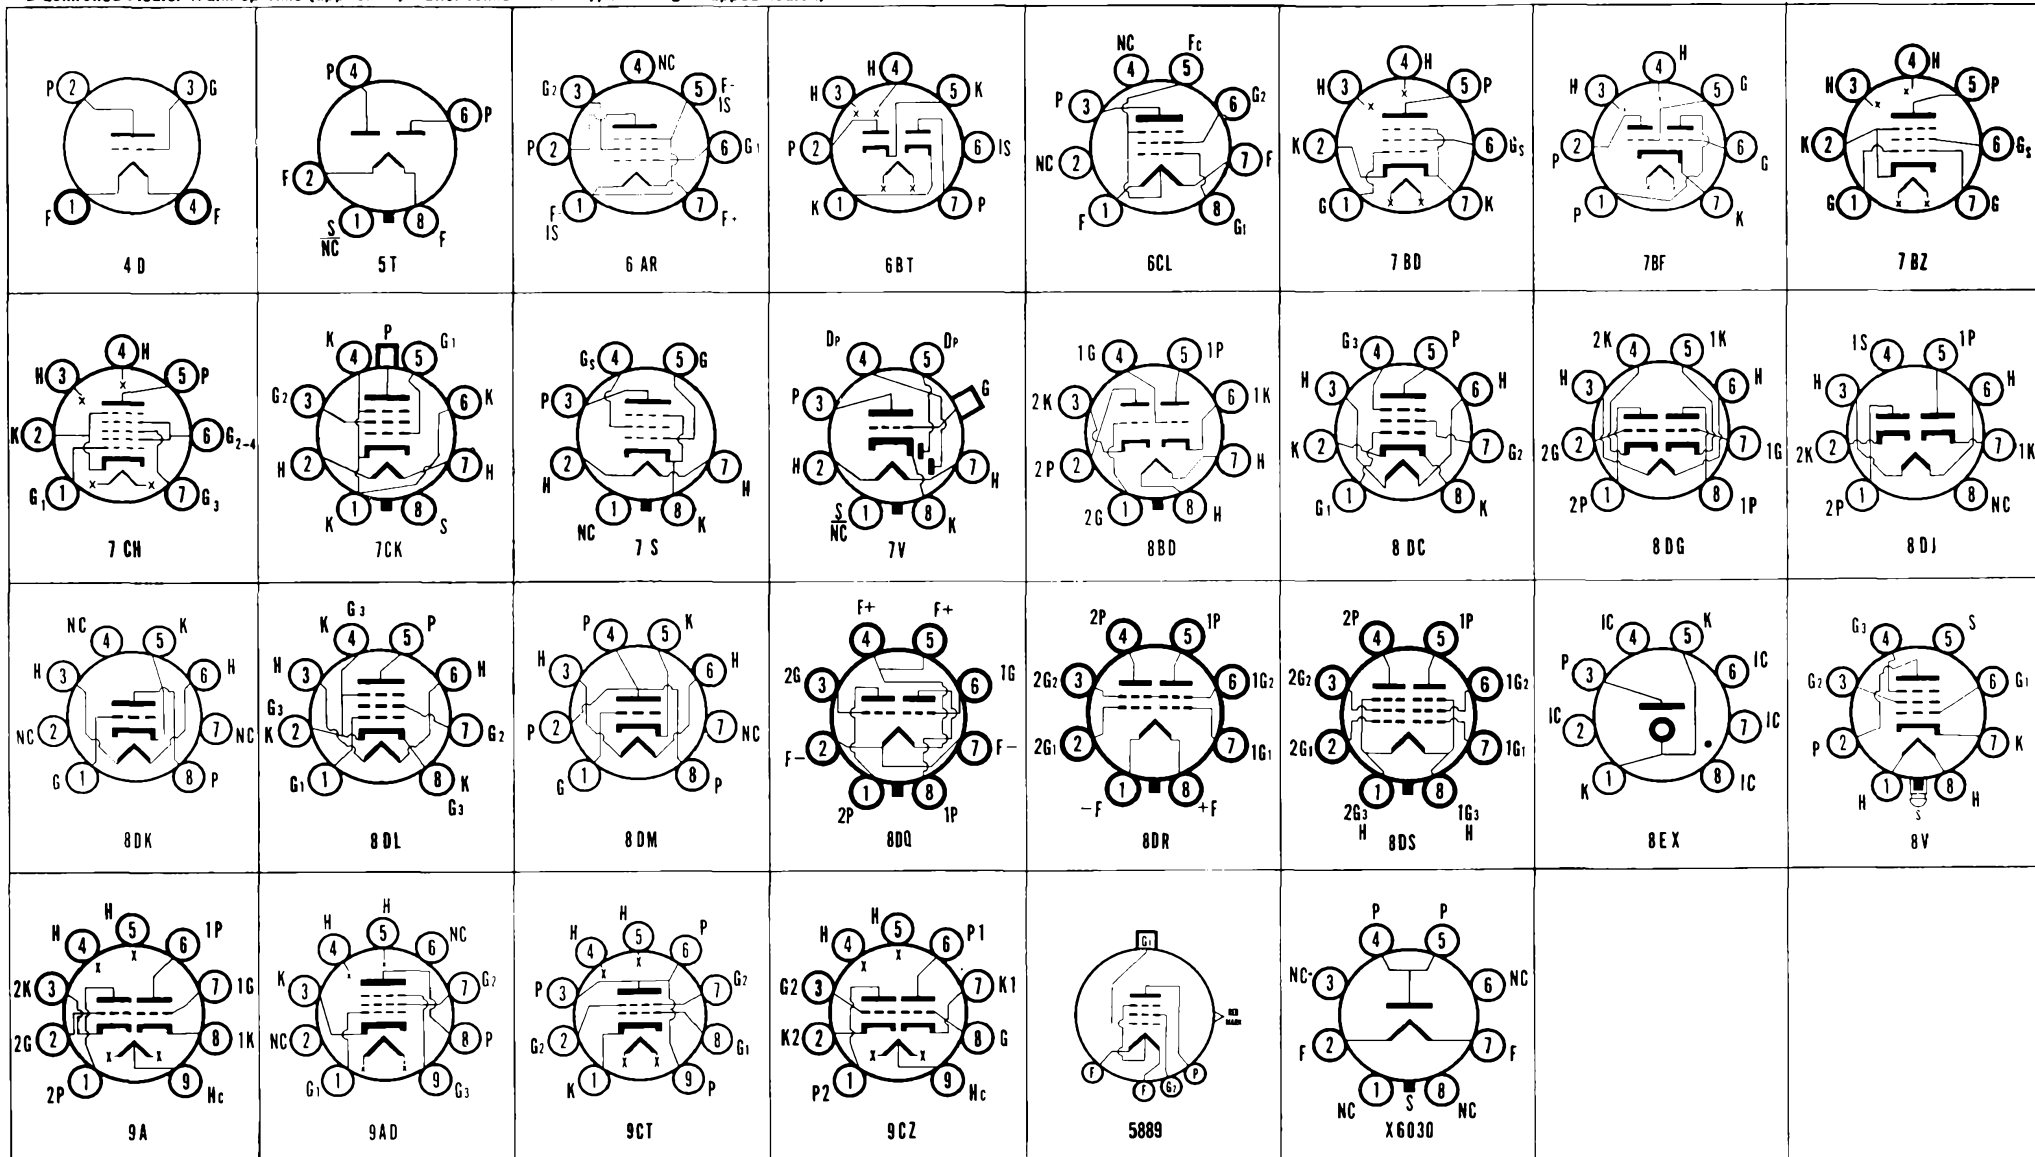


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Power Output Milliwatts	Type
	Bulb Size or Style	Class	Basing Diag.	Type	Volts	Amps.	Cgp.	C1n.	Cout												
6352	T-3	Duodiode	8EY-0-0	Filament	3.0 Series	0.360 Series	Regulator	Temperature Limited Diode. Max. Ef. = 4.0. Max. Eb. = 275. Max. Ib. = 1.1 Ma.										6352
6394A	TT-16	Duo Power Triode	8BD	Cathode	26.5	1.300	21.8*	16.7*	3.8*	Passing Tube For V.R. Service	Characteristics Same as Type 6336A.										6394A
6463	T-6½	Duodiode	9CZ-0-0	Cathode	6.3/12.6	0.600/0.300	5.0* 5.0*	3.0* 3.0*	0.6* 0.5*	Computer #	200 250	11.0 620 ^u		1.0 14.5	3850 ^u	5200	20	6463
6486A	T-6½	Pentode	9DV	Cathode	6.3	0.250	.04	4.4	3.7	Dual Control Pentode	120	2	120	3.5	3.3	3,250	6486A	
6516	T-5½	Beam Pent.	6CH	Cathode	6.3	0.200	0.3m	4.25	6.5	VHF/AF Power Amp.	250	13.5	250	16.0	2.25	150,000	2,550	16,000	1,400	6516
6520	T-16	Duo Power Triode	8BD	Cathode	6.3	2.500	9.4*	8.4*	2.2*	Passing Tube for V.R. Serv.	Characteristics Same as Type 6AS7G.										6520
6528	ST-16	Duo Power Triode	8BD	Cathode	6.3	5.000	23.8*	17.8*	2.9*	Passing Tube For V.R. Service	100	4	185	245	37,000	9	6528
6550	ST-16	Beam Pent.	7S-0-0	Cathode	6.3	1.600	0.85*	14.0*	12.0*	S.T.A1 Amp. P.P.AB1 Amp.	400 600	16.5 33	225 300	87.0 100-280†	4.0 3-33†	27,000 (Current and Output for Two Tubes)	9,000	3,000 5,000	20,000 100,000	6550	
6582A	T-6½	Pentode	9EJ	Cathode	6.3	0.250	.03	4.5	3.0	R-F Pent.	120	180 ^u	120	7.5	2.5	.5 Meg. †	4,500	6582A	
6626	T-5½	Gas Diode	5BO-0-0	Cold K					Voltage Reg.	Starting Voltage = 165. Operating Voltage = 148. Operating Current = 5 to 30 Ma.										6626
6627	T-5½	Gas Diode	5BO-0-0	Cold K					Voltage Reg.	Starting Voltage = 130. Operating Voltage = 108. Operating Current = 5 to 30 Ma.										6627
6690 (3)	T-3	Duodiode	8GQ-0-0	Cathode	6.3	0.300	2.1m 2.1m	3.2m 3.2m	1.8m 2.2m	Video Amp.#	100	100 ^u	8.0	4,800	35	6690 (3)
6788	T-3	Pentode	8DL	Cathode	6.3	0.175	.032	2.4	3.3	Audio Amp.	100	1500 ^u	100	0.7	0.1	1.2 Meg.	1,100	6788	
6814	T-3	Triode	8DK	Cathode	6.3	0.150	1.3	2.4	2.4	Computer	100	0	10	4,800	6,000	29	6814	
6832	T-3	Duodiode	8DG	Cathode	6.3	0.400	D.C. Amp.	100	3000 ^u	0.8	1,050	6832	
6840	T-6½	Duodiode	9CZ	Cathode	12.6 6.3	0.400 0.800	5.5* 5.5*	4.0* 4.0*	0.7* 0.7*	Computer	250	620 ^u	14	3,400	7,100	20	6840	
6851	T-6½	Duodiode	9A	Cathode	6.3	0.250	1.4* 1.4*	1.6* 1.6*	0.46* 0.36*	Amplifier#	250	3100 ^u	1.0	60,000	1,200	70	6851	
6854	T-6½	Duodiode	9FV	Cathode	6.3	0.500	1.7* 1.7*	2.4* 2.4*	1.1* 1.1*	Amplifier#	150	240 ^u	8.2	6,500	5,225	35	6854	
6870	T-6½	Beam Pent.	9BF	Cathode	6.3 12.6	0.600 0.300	.025m*	8.5*	7.0*	VHF Power Amp.	250	120 ^u	250	25.0	3.5	230	8,500	6870	
6877	T-6½	Power Triode	9GB	Cathode	6.3	0.800	Power Amp.	150	12	75	2,000	6,500	3.75	12,000	6877
6883	T-12	Beam Pent.	7CK-8-1,4,6	Cathode	12.6	0.625	0.24*	13.5*	8.5*	Power Amp.	Characteristics Same as Type 6146.										6883
6893	T-9	Beam Pent.	7CK-8-1,4,6	Cathode	12.6	0.400	0.2*	12.5*	7.0*	Power Amp.	Characteristics Same as Type 2E26.										6893
6900	T-6½	Duo Power Triode	9H	Cathode	6.3 12.6	0.900 0.450	4.0* 4.0*	4.0* 4.0*	0.6* 0.5*	Power Amp.	120	2	36	2,000	11,500	17.5	4.2 Watts Plate Dissipation	6900
6913	T-6½	Duodiode	9A-0-0	Cathode	12.6 6.3	0.300 0.600	3.4*	3.6*	0.5*	Computer	150	5.0	11.0	3,900	4,600	18	6913
6919	T-5½	Duodiode	6BT	Cathode	6.3	0.200	F-W Rect. Computer	Maximum Inverse Peak Plate Voltage = 300 Volts. Maximum Peak Plate Current = 30 Ma. Maximum D.C. Output Current = 10 Ma. (Design Max. Values).										6919
6922	T-6½	Duodiode	9DE	Cathode	6.3	0.300	1.4* 1.4*	3.3* 3.3*	1.75* 1.65*	VHF Amp.	90	120 ^u	12	2,800	11,500	33	6922
6943	T-3	Pentode	8DC	Cathode	6.3	0.175	.015	3.0	3.0	R-F Amp.	100	150 ^u	100	8	2.3	300,000	3,600	6943	
6944	T-3	Pentode	8DC	Cathode	6.3	0.175	.015	2.9	3.1	R-F Amp.	100	150 ^u	100	7	2.1	280,000	3,200	6944	
6945	T-3	Beam Pent.	8DL	Cathode	6.3	0.350	0.13	5.0	5.5	Power Amp.	100	270 ^u	100	25	1.5	20,000	3,500	3,000	800	6945
6946	T-3	Triode	8DK	Cathode	6.3	0.175	1.0*	1.6*	0.75*	Amplifier	100	270 ^u	9.0	3,800	16.5	6946
6947	T-3	Duodiode	8DG	Cathode	6.3	0.350	1.2* 1.2*	1.6* 1.6*	0.2* 0.25*	Amplifier#	150	270 ^u	6.5	4,000	35	6947
6948	T-3	Duodiode	8DG	Cathode	6.3	0.350	0.75* 0.75*	1.6* 1.6*	0.2* 0.25*	Amplifier#	100	1500 ^u	0.8	1,650	70	6948
6954	T-5½	Pentode	7CM	Cathode	6.3	0.300	.0035m*	6.0*	5.0*	Dual-Control Computer	150	1.0	150	5.8	6.6	50,000	2,050	Grid No. 3 = -3.0 Volts			6954
6955	T-6½	Duodiode	9A	Cathode	6.3 12.6	0.350 0.175	1.4* 1.4*	1.5* 1.5*	0.5* 0.4*	Amplifier#	100 250	0 8.5	13.0 11.5	5,800 † 7,000 †	3,500 2,350	21.3 16.5	6955
6968	T-5½	Pentode	7BD	Cathode	6.3	0.175	.02	4.0	2.85	VHF Amp.	Characteristics Same as Type 6AK5.										6968
6973	T-6½	Beam Pent.	9EU	Cathode	6.3†	0.450	0.4	6	6	S.T. A1 Amp. P.P. AB1 Amp. P.P. AB1 Amp.	250 300 350	15 230 ^u 22	250 300 280	46 80-96† 58-106†	3.5 6-14† 3.5-14†	73,000	4,800	5,500 7,500	15,000† 20,000†	6973
7001	T-5½	Beam Tetrode	7EJ	Cathode	6.3	0.450	0.1m	7.0	8.75	Power Amp.	120	250 ^u	120	35	4	4,800	7001
7025	T-6½	Duodiode	9A	Cathode	12.6 6.3	0.150 0.300	1.7* 1.7*	1.6* 1.6*	0.46* 0.34*	Audio Amplifier	Characteristics Same as Type 12AX7, except Controlled for Noise and Hum.										7025
7027	T-12	Beam Pent.	8HY	Cathode	6.3	0.900	1.5*	10*	7.5*	P.P.AB1 Amp.	330 400 450 400 380 410	24 25 30 200 ^u 180 ^u 220 ^u	330 300 350 300 380 410	122-184† 102-152† 95-194† 112-128† 138-170† 134-155†	5.6-18.5† 6-17† 3.4-19.2† 7-16† 5.6-20† (Cathode Current) Ultra-Linear Circuit.	4,500 ^u 6,600 ^u 6,000 ^u 6,600 ^u 4,500 ^u 8,000 ^u	31,500 34,000 50,000 32,000 36,000 24,000	7027

7036	T-5½	Heptode	7CH	Cathode	6.3	0.300	.08* .35*	5.4* 6.9*	7.6*	Dual Control Computer	Characteristics Same as Type 5915A.							7036			
7044	T-6½	Duotriode	9H	Cathode	6.3 12.6	0.900 0.450	6.0 6.0	4.8 4.8	0.65 0.55	Computer	120	2.0	36	1,900	10,000	19	7044
7077	Ceramic and Metal	Triode	7077	Cathode	6.3	0.240	1.0*	1.9*	.10*	UHF R-F Amp.	250	82 ^m	6.4	8,900	9,000	80	7077
7105	T-12	Duo Power Triode	8BD	Cathode	12.6	1.250	8.4*	6.2*	2.2*	Passing Tube For V.R. Service	Characteristics Same as Type 6080WA.							7105			
7137	T-5½	Triode	7BQ	Cathode	6.3	0.225	1.7	6.0	4.5	VHF Amp.	150	100 ^m	13.5	8,500	40	7137	

(1) Values are given shielded unless marked with (*). (3) Has special mechanical and/or life characteristics. # Per Tube or Section.
 (2) Converter tube capacitances given are signal grid to plate, RF Input, Mixer Output. (4) Average Contact potential bias developed across specified grid resistor. † Plate and Target Supply Voltage.
 ‡ Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.) □ Applied through 20,000 ohms.
 ▲ Conversion Transconductance. †† Plate to Plate.
 ††† Approximate. †††† Cathode Resistor (ohms).
 ††††† Maximum.

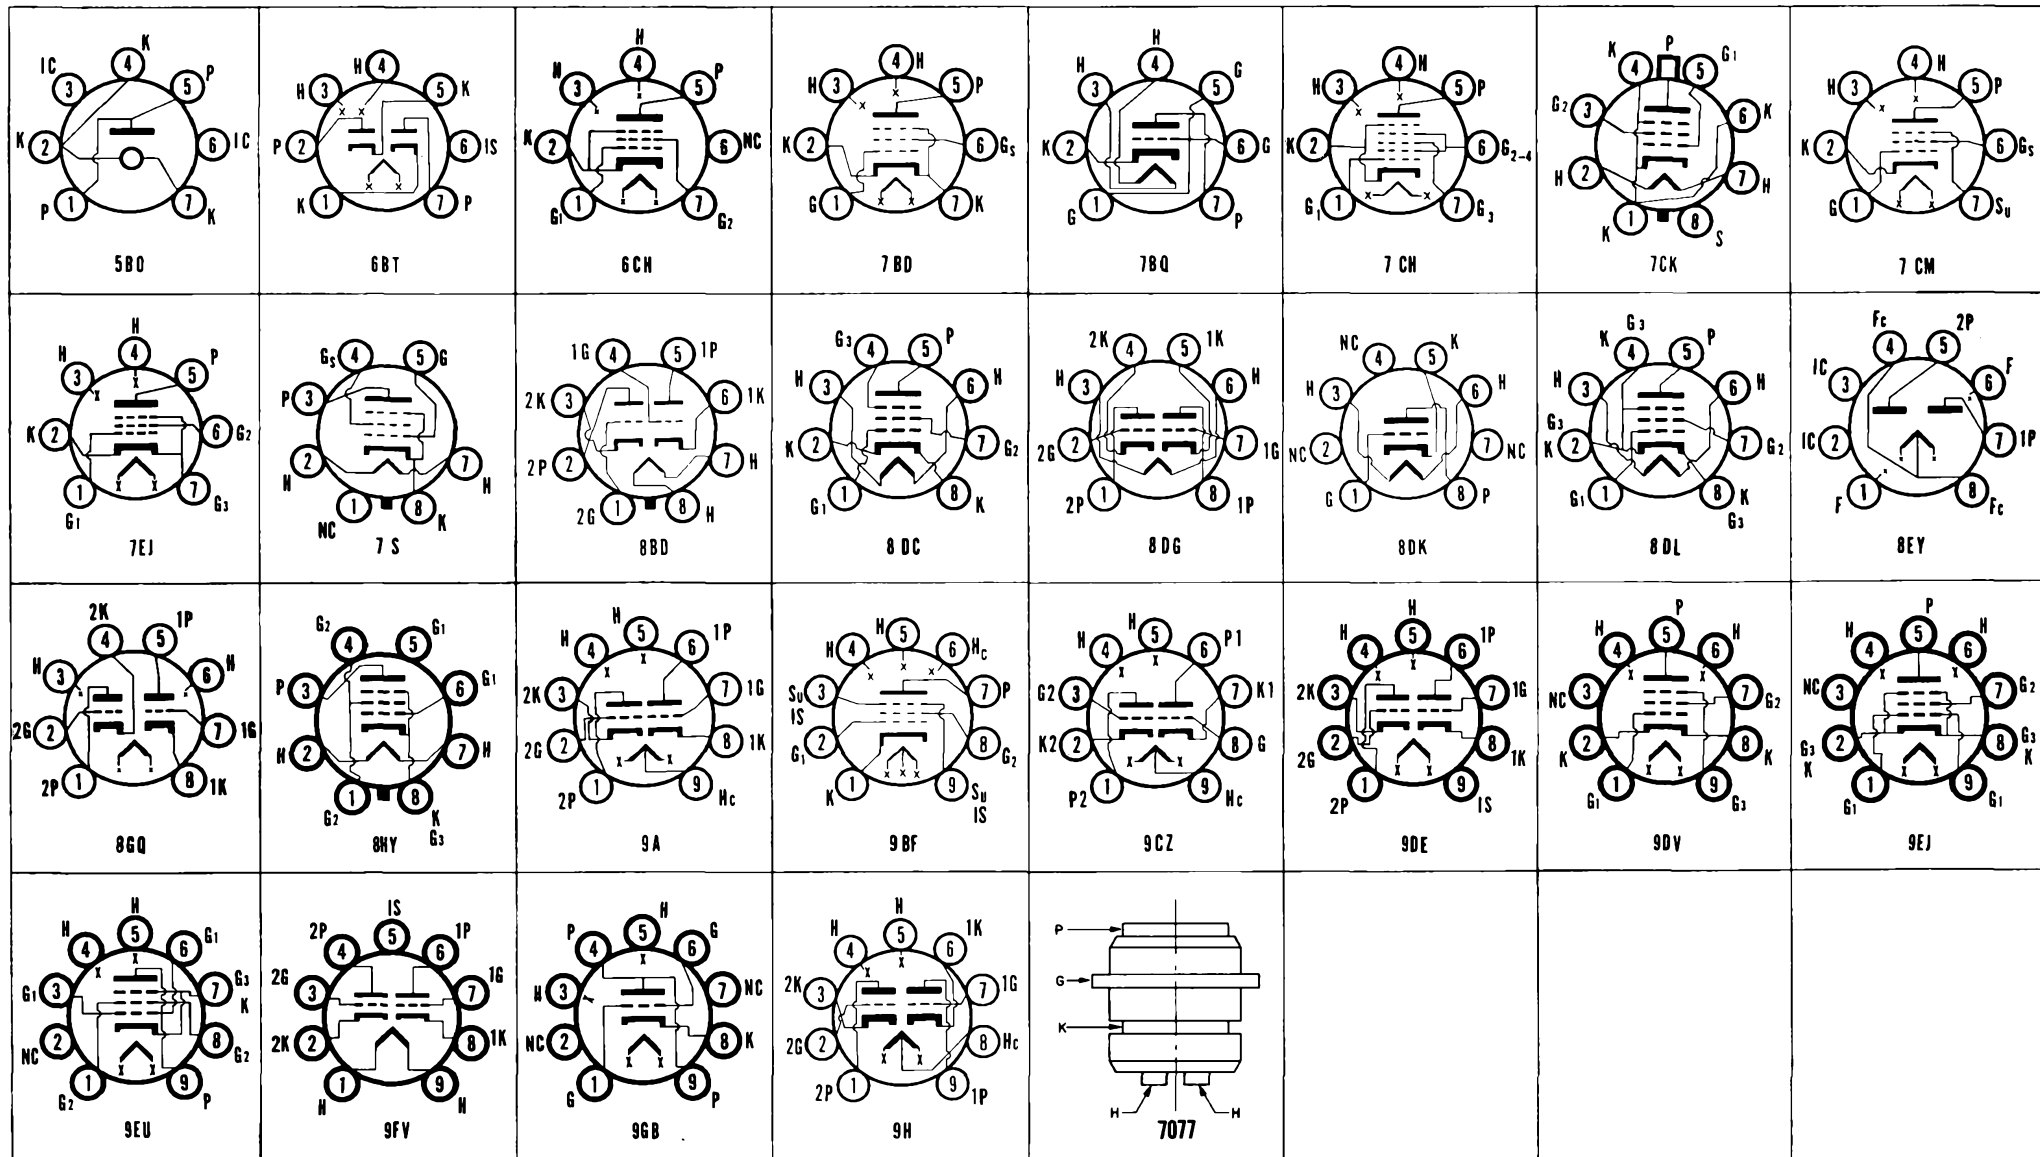


SYMBOLS FOR BASE DIAGRAMS: Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Grids numbered according to their position from the cathode; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection. DO NOT USE, J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shell; SA—Starter Anode; T—Target; XS—External Shield; □—Top Cap; ■—Locating Key.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Transconductance Micromhos	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type	
	Bulb Size or Style	Class	Basing Dias.	Type	Volts	Amps.	Cgp.	Cin.	Cout													
7167	T-5½	Tetrode	7EW	Cathode	13.5	0.090	.03m	4.4	2.74	VHF Amp.	250	1.0	80	10	1.4	125,000	8,000	7167	
Similar to Type 6CY5, Except Designed for Mobile Applications.																						
7212	T-12	Beam Pent.	8EC	Cathode	6.3	1.250	0.24m*	13.5*	8.5*	P.P.AB1 Amp. P.P.AB1 Amp. P.P.AB2 Amp.	600 500 600	45 40 44	180 185 165	26-200† 57-215† 22-207†	1-23† 2-25† 0.6-17†	7,000 5,500 6,800	82,000 70,000 90,000	7212
7244	T-5½	Duotriode	7BF	Cathode	6.3	0.450	1.4* 1.4*	3.0* 3.0*	0.34* 0.28*	Amplifier	100	50 ^m	9.0	6,300	6,000	38	7244
(Frame—Grid Construction).																						
7258	T-6½	Tri. Pentode	9DA	Cathode	13.5	0.210	1.5* .04*	2.0* 7.0*	0.26* 2.4*	Tri. Amp. Pent. Amp.	150 125	3 56 ^m 125	15 12 3.8	4,700 170,000	4,500 7,800	21	7258
(Designed for Mobile Operation).																						
9001	T-5½	Pentode	7BD-0-7	Cathode	6.3	0.150	.01	3.6	3.0	R-F Amp.	250	3.0	100	2.0	0.7	1 Meg. >	1,400	9001	
9002	T-5½	Triode	7BS-0-0	Cathode	6.3	0.150	1.4	1.2	1.1	Amplifier	250	7.0	6.3	11,400	2,200	25	9002	
9003	T-5½	Pentode	7BD-0-7	Cathode	6.3	0.150	.01m	3.6	3.0	R-F Amp.	250	3.0	100	6.7	2.7	700,000	1,800	9003	
9004	Acorn	Diode	4BJ-0-0	Cathode	6.3	0.150	H-W Rect.	117 Volts RMS Plate, 5 Ma. D-C Output.										9004	
9005	Acorn	Diode	5BG-0-0	Cathode	6.3	0.150	H-W Rect.	117 Volts RMS Plate, 1.0 Ma. D-C Output.										9005	
9006	T-5½	Diode	6BH-0-0	Cathode	6.3	0.150	H-W Rect.	270 Volts RMS Plate, 5 Ma. D-C Output.										9006	
XXD	Now Listed as 14AF/XXD																				XXD	
XXFM	Now Known as Type 7X7																				XXFM	
XXL	Lock-in	Triode	5AC-L-0	Cathode	6.3	0.300	Amplifier	100 250	0.0 8.0	10.0 8.0	7,000 8,700	3,600 2,300	25 20	XXL	


(1) Values are given shielded unless marked with (*). (2) Converter tube capacitances given are signal grid to plate, RF input, Mixer Output. (3) Has special mechanical and/or life characteristics. (4) Average Contact potential bias developed across specified grid resistor.
 # Per Tube or Section. § Plate and Target Supply Voltage. † Maximum Signal.
 □ Applied through 20,000 ohms. ▲ Conversion Transconductance. ** Triode Operation.
 †† Plate to Plate. ‡ Approximate. m maximum. ■ Cathode Resistor (ohms).
 I Controlled Heater Warm-up Time (applies to parallel connections of types having a tapped heater.)

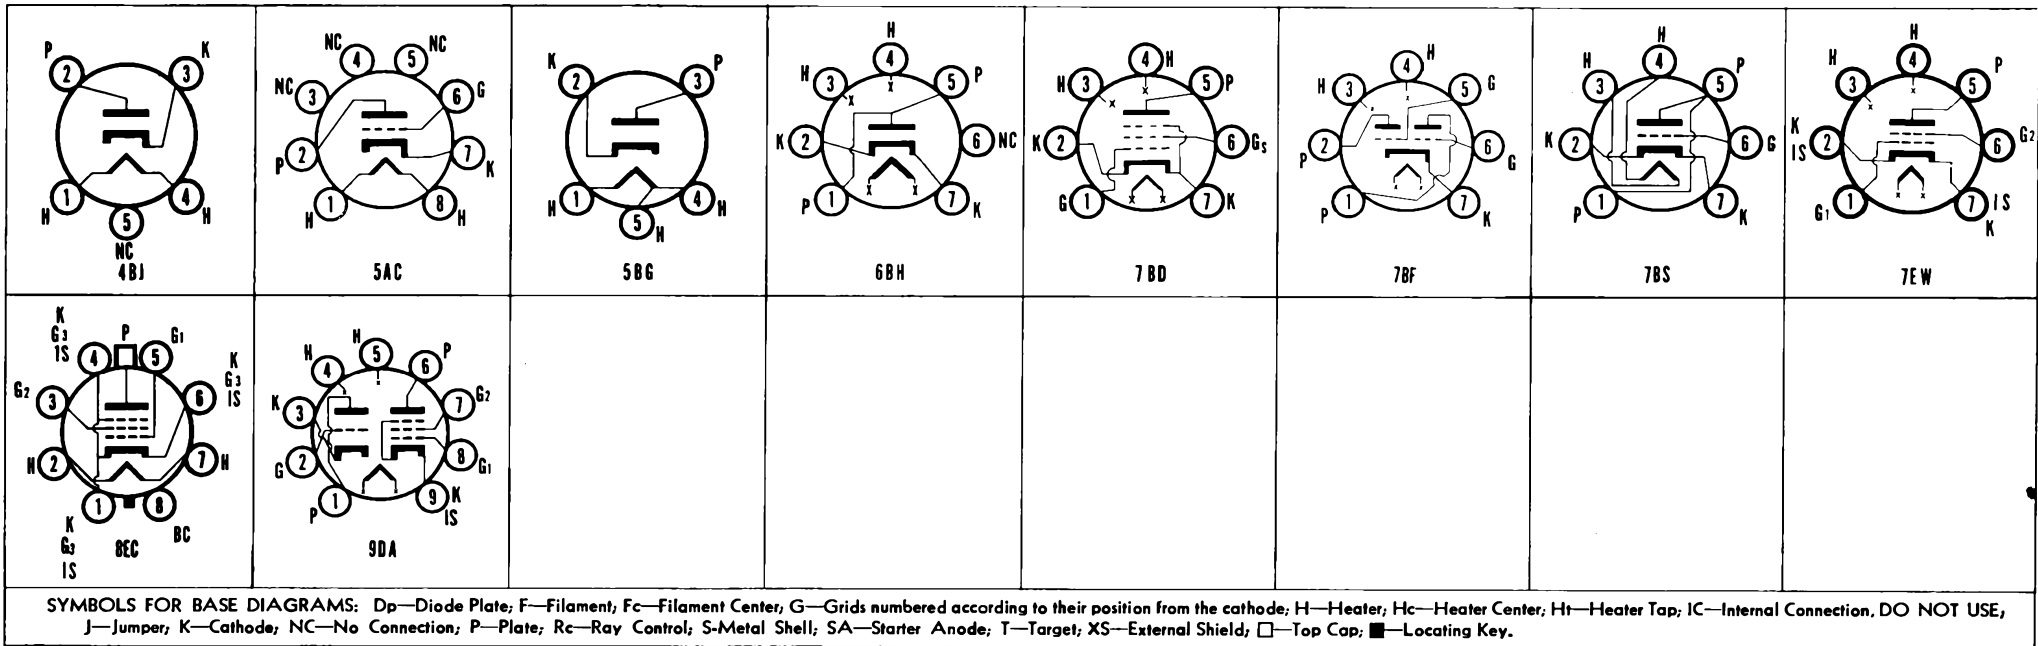

TUBE TYPE BASE ARRANGEMENTS

BASE	TYPE	BASE	TYPE	BASE	TYPE	BASE	TYPE	BASE	TYPE	BASE	TYPE	BASE	TYPE	BASE	TYPE
OA5	OA5	5T	5AW4, 5AX4GT, 5AZ4	7AU	6AB6G 6N6G	7S	5V6GT 6DG6GT 6EF6 6F6	8EC	7212	9DT	1H2 3A2	9E	6R8 6T8 19C8 19T8 51	9EA	588
1AG4	1AG4		5R4GY, 5YA, 5U4WG 5V3	7AV	154		G 6G6G/GT 6G6G 6K6GT	8EL	64H4GT	9DV	6486A	9ED	6AZ8	9EF	6C57
1AG5	1AG5		5W4 5Y3GA, GT 5T4 5U4G	7AX	6AE7GT		6L6 G, GA, GB 6L6GAY	8ES	40A1 40B2	9DW	5A78 6AT8 6AT8A	9EN	6C71	9ER	6C73
1AJ5	1AJ5		GA, GB 5W4GT, 5931, 6004	7AZ	6SF7 6SV7, 12SF7		6U6 GT, GTY, 6U6GT, 6V6	8ET	6CA7 EL34	9DX	6AW8 6AU8A, 6AW	9EV	6C73	9EY	6C73
1AK4	1AK4	5U	6K5G 6K5GT	7B	6A6 6E6 53 5608A		GT, 6W6GT, 6Y6G, GA	8EX	6308		6AW8A, 6B8A, 6B8B, 6EE	9FA	6C74		6C74
1AK5	1AK5	5Y	1D5GP 1E5GP, 1N5GT	7BA	354 3Q4 3Z4		7EY6, 9EF6 12AG, GT 12EF6	8EY	6352		8A8U, 8AW8A, 8BA8,		6C74		6C74
3C	1B3GT, 1G3, 1J3, 1K3		1P5GT	7BB	3A4		12EN6 12L6GT, 12V6GT, 12	8F	25A7GT		8BH8 8EB8		6C74		6C74
4AA	1LE3, 1293	5Z	1H5GT	7BC	3A5		W6GT 17L6GT 25A6 GT	8FU	6BD4 6BD4A		6R8 6T8 19C8 19T8 51		6C74		6C74
4AB	2X2/879	6A	48	7BD	3BC5 3CE5 4BC5 4CE5		25B6G 25C6G 25C6GA 25-	8FV	3C2		6T8A		6C74		6C74
4AC	3A3 6Y3G	6AA	7A5 7C5 14A5 14C5 35A5		50A5		L6 GT 35L6GT 50C6G	8G	6C8G 6F8G		588		6C74		6C74
4AD	83V		6BC5 6CE5 5590 5591 5654		65F5 65F5GT 12SF5 12SF5GT		50C6GA 50L6GT 1614 5824	8GB	6BL4		6AZ8		6C74		6C74
4AH	1R4 7C4	6AB	5725 6028 6968 9001 9003		35Z5GT, 40Z5/45Z5GT	7BE	5871 5881 5932 6550 EL 37	8GC	6BK4 6BU4		6C73 6C77 6DA7 6DA7 8CS		6C74		6C74
4AJ	OA3/VR75 OB3, OC3 OD3	6AD	3B7	7BF	7B5		KT 66, KT 88	8GD	6BK5 6CL5		8C7 10DA7 11CY7		6C74		6C74
	1265 1266	6AE	5J6 6J6 6J6A, 19J6, 5844	7BH	1Q5GT	7T	5964 6045 7244	8GH	3B2		5BE8 5DH8 6BE8 6BE8A		6C74		6C74
	2C22	6AF	7A5 6J6 6J6A, 19J6, 5844	7BJ	6AL6 6AL6G 6BQ6G GA	7U		8GO	6P7G		6582A		6C74		6C74
	2Z2/G84, 81	6AM	2C21	7BK	6A16 6A16G 6A16G 6A16G	7V		8GS	6P7G		6C74		6C74		6C74
	9004		2C21		GTA, GTB 6BWS 6CU6			8GT	6P7G		6C74		6C74		6C74
	OY4 OY4G		2C21		6DJ6 6DQ6 6DQ6A, 6FH6			8H	6P7G		6C74		6C74		6C74
	5X3 5Z3, 80, 82, 83, 1275		2C21		12BQ6GA, GTA, GTB 12CU6			8HC	6P7G		6C74		6C74		6C74
	117Z3		2C21		12DQ6 12DQ6A 17BQ6G-			8HY	6P7G		6C74		6C74		6C74
	6AU4GT, 6AX4GT, 6U4GT		2C21		TB, 17DQ6 25BQ6GA, 25BQ-			8JB	6P7G		6C74		6C74		6C74
	6W4GT, 12AX4GT, 12D4		2C21		6GT, GTB, 25CU6 25DQ6			8JC	6P7G		6C74		6C74		6C74
	17AX4GT, 25AX4GT, 25W4		2C21		6V5GT			8JK	6P7G		6C74		6C74		6C74
	GT 6AU4GTA, 12AX4GTA,	6AO	2C21		6AH5G			8K	6P7G		6C74		6C74		6C74
	19AU4, GTA	6AP	2C21		1AE4, 1AF4, 1L4, 1T4, 1U4			8K	6P7G		6C74		6C74		6C74
	5823 6DA4, 12D4, 17D4	6AR	2C21		5910			8K	6P7G		6C74		6C74		6C74
	5644		2C21		6B5			8L	6P7G		6C74		6C74		6C74
	OOA, O1A, 2A3, 6A3, 10	6AS	2C21		6B5			8L	6P7G		6C74		6C74		6C74
	12A, 20, 26, 30, 31, 40, 45	6AU	2C21		1AF5 1S5			8M	6P7G		6C74		6C74		6C74
	50, 71A, X99, 182B/482B,	6AW	2C21		6R6G			8N	6P7G		6C74		6C74		6C74
	183/483, 210-T, 864, 1276,	6AX	2C21		1LD5				6P7G		6C74		6C74		6C74
	VT52 1230, 5930	6B	2C21		2A5 18, 41, 42, 43				6P7G		6C74		6C74		6C74
		6BA	2C21		3D6 3LE4, 3LF4				6P7G		6C74		6C74		6C74
		6BD	2C21		1SA6GT				6P7G		6C74		6C74		6C74
		6BE	2C21		15B6GT				6P7G		6C74		6C74		6C74
		6BG	2C21		6C4 12G4				6P7G		6C74		6C74		6C74
		6BH	2C21		9006				6P7G		6C74		6C74		6C74
		6BJ	2C21		28Z5				6P7G		6C74		6C74		6C74
		6BQ	2C21		6AR6				6P7G		6C74		6C74		6C74
		6BS	2C21		2050 2051				6P7G		6C74		6C74		6C74
		6BT	2C21		3AL5 6AL5, 12AL5, 5726,				6P7G		6C74		6C74		6C74
			2C21		6097 6919				6P7G		6C74		6C74		6C74
			2C21		1DN5 1U5				6P7G		6C74		6C74		6C74
			2C21		3E5 3V4				6P7G		6C74		6C74		6C74
			2C21		19				6P7G		6C74		6C74		6C74
			2C21		6AR5				6P7G		6C74		6C74		6C74
			2C21		6AM5 6BJ5 6516				6P7G		6C74		6C74		6C74
			2C21		5641				6P7G		6C74		6C74		6C74
			2C21		6AUSGT 6AV5GT 6AV5,				6P7G		6C74		6C74		6C74
			2C21		GA 6BD5GT 12AV5GA,				6P7G		6C74		6C74		6C74
			2C21		17AV5GA, 18A5, 25AV-				6P7G		6C74		6C74		6C74
			2C21		5GA 25AV5GT				6P7G		6C74		6C74		6C74
			2C21		5851 6147				6P7G		6C74		6C74		6C74
			2C21		6BY5G GA				6P7G		6C74		6C74		6C74
			2C21		6CS5				6P7G		6C74		6C74		6C74
			2C21		25B5				6P7G		6C74		6C74		6C74
			2C21		25Y5 25Z5				6P7G		6C74		6C74		6C74
			2C21		6C6 6D6 57 57S 57AS 58				6P7G		6C74		6C74		6C74
			2C21		58S 58AS 77 78 89 1221				6P7G		6C74		6C74		6C74
			2C21		2A6 55 55S 75 75S 85,				6P7G		6C74		6C74		6C74
			2C21		85AS				6P7G		6C74		6C74		6C74
			2C21		79				6P7G		6C74		6C74		6C74
			2C21		6Y5				6P7G		6C74		6C74		6C74
			2C21		6Z5				6P7G		6C74		6C74		6C74
			2C21		6K4				6P7G		6C74		6C74		6C74
			2C21		1A6 1C6				6P7G		6C74		6C74		6C74
			2C21		1B5				6P7G		6C74		6C74		6C74
			2C21		6M3				6P7G		6C74		6C74		6C74
			2C21		6AC5GT 6AD5G GT, 6AE5-				6P7G		6C74		6C74		6C74
			2C21		GT 6AF5G 6C5 GT*, 6J5				6P7G		6C74		6C74		6C74
			2C21		GT 6L5G 6P5GT, 12J5GT				6P7G		6C74		6C74		6C74
			2C21		25AC5GT 884 1626 12E5GT				6P7G		6C74		6C74		6C74
			2C21		2E5 6AB5/6N5, 6E5 6U5 6T5				6P7G		6C74		6C74		6C74
			2C21		6AX5GT 6W5G, 6X5GT,				6P7G		6C74		6C74		6C74
			2C21		6X5WGT 6ZY5G 1274,				6P7G		6C74		6C74		6C74
			2C21		5838 5839 5852				6P7G		6C74		6C74		6C74
			2C21		6A5G				6P7G		6C74		6C74		6C74
			2C21		1F6				6P7G		6C74		6C74		6C74
			2C21		1A5GT 1C5GT, 1F5G, 1G5G,				6P7G		6C74		6C74		6C74
			2C21		1J5G, 1T5GT				6P7G		6C74		6C74		6C74
			2C21		59				6P7G		6C74		6C74		6C74
			2C21		1H6G				6P7G		6C74		6C74		6C74
			2C21		1G6GT, 1J6G, 1J6GT				6P7G		6C74		6C74		6C74
			2C21		1F7G*				6P7G		6C74		6C74		6C74
			2C21		1F7GV				6P7G		6C74		6C74		6C74
			2C21		6AD6G 6AF6G				6P7G		6C74		6C74		6C74
			2C21		6AE6G				6P7G		6C74		6C74		6C74
			2C21		1LA6 1LC6				6P7G		6C74		6C74		6C74
			2C21		1629				6P7G		6C74		6C74		6C74
			2C21		1N6GT				6P7G		6C74		6C74		6C74
			2C21		1LC5 1LG5 1LN5				6P7G		6C74		6C74		6C74
			2C21		3B5GT, 3Q5GT, 3C5GT				6P7G		6C74		6C74		6C74
			2C21		1R5				6P7G		6C74		6C74		6C74
			2C21		6AB6G 6N6G				6P7G		6C74		6C74		6C74
			2C21		6AE7GT				6P7G		6C74		6C74		6C74
			2C21		6SF7 6SV7, 12SF7				6P7G		6C74		6C74		6C74
			2C21		6A6 6E6 53 5608A				6P7G		6C74		6C74		6C74
			2C21		354 3Q4 3Z4				6P7G		6C74		6C74		6C74
			2C21		3A4				6P7G		6C74		6C74		6C74
			2C21		3A5				6P7G		6C74		6C74		6C74
			2C21		3BC5 3CE5 4BC5 4CE5				6P7G		6C74		6C74		6C74
			2C21		6AG5 6AJ5 6AK5 6AN5,				6P7G		6C74		6C74		6C74

Technical Literature

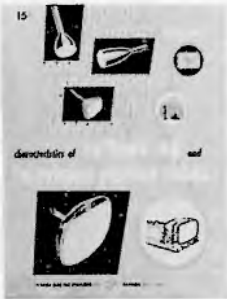


TUBE CHARACTERISTICS BOOKLET

TELEVISION TUBES

Complete information on characteristics of all types of Sylvania tubes, including tube base diagrams and helpful suggestions.


Order No. 216 15¢

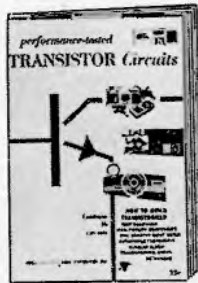

HOW TO BUILD TRANSISTORIZED TEST EQUIPMENT

High fidelity components, photography light meter, automobile tachometer, burglar alarm, transistorized organ and metronome.

Order No. NH66 35¢

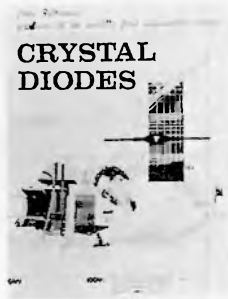

CRYSTAL DIODES

GERMANIUM CRYSTAL DIODES

Order No. NH29
FREE



HOW TO MAKE A TRANSISTORIZED PORTABLE RADIO

HOW TO MAKE A TRANSISTORIZED PORTABLE RADIO

Make your own transistorized portable radio—and twenty other practical applications for R-F transistors.

Order No. 222 35¢

Published by Sylvania and constantly revised to keep you informed about the most recent electronic developments.



TECHNICAL MANUAL

Complete data, in convenient forms, on Sylvania tubes. Ring binder permits easy insertion of new data sheets which are mailed as released at no additional cost.

Order No. 202 \$2.50
Additional binders—75¢



TECHNICAL SECTIONS

Contain all issues of Technical Sections of Sylvania News, Vol. 1 (1935 to 1940 incl.), Vol. 2 (1941 to 1945 incl.), Vol. 3 (1946 to 1949 incl.), Vol. 4 (1950 to 1953 incl.), Vol. 5 (1954 to date).

Order No. 220 \$1 per vol.
(Indicate Volume No.)



JUNCTION TRANSISTORS

This booklet of practical transistor circuits has been accumulated from tests of many devices. Serves as manual of applications and circuits for service dealers—28 uses for junction transistors.

Order No. 237 35¢



MICROWAVE DIODE HANDBOOK

This is a new handbook for the engineers—includes many new uses of diodes.

Order No. 230 50¢



Order now

from your Sylvania distributor

or write to

**Sylvania
Central Advertising
Distribution Dept.**

1100 Main Street
Buffalo 9, N. Y.



40 USES FOR GERMANIUM DIODES

Order No. 240 35¢




CRYSTAL DIODE CIRCUIT KINKS

Order No. 239 35¢



ELECTRONIC SHORTCUTS FOR HOBBYISTS

Order No. 241 35¢

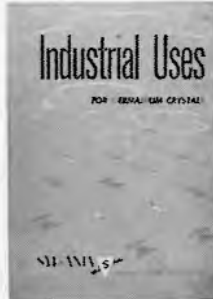

INDUSTRIAL USES FOR GERMANIUM CRYSTALS

Order No. 242 35¢

**SYLVANIA
ELECTRIC PRODUCTS INC.**

1740 BROADWAY
NEW YORK 19, N. Y.