




McLEAN BLOWERS

The *KEY* to System
RELIABILITY

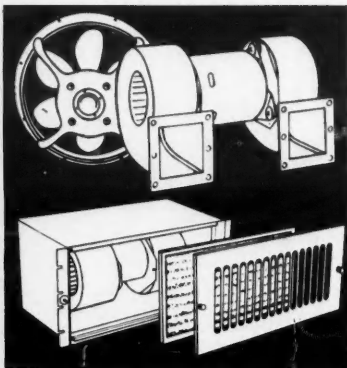

RFI SHIELDED — MIL-SPEC AND COMMERCIAL

Over 100 Models in a wide
variety of sizes & CFM's

Our '63 catalog contains complete engineering data on packaged blowers, ring fans, panel fans, centrifugal blowers and accessories. Write Today.



McLEAN ENGINEERING LABORATORIES

World Leader in Packaged Cooling


P.O. Box 228, Princeton, New Jersey

Phone Area Code 609 WAInut 4-4440
TWX 609-799-0245

**TOPS IN RELIABILITY & PERFORMANCE
FOR OVER 23 YEARS**

ON READER-SERVICE CARD CIRCLE 60

July 19, 1963



January 4 through June 21, 1963

SEMIANNUAL INDEX OF ARTICLES

All Material is listed under one of the following subjects:

Circuits, Mathematical Analysis	Microwaves
Communications, Methods and Equipment	Missiles and Space
Components (See Microwaves, Semiconductors)	Packaging Techniques, Production Processes and Equipment
Computers, Data Processing, Auxiliary Devices	Power Sources
Consumer Electronics	Radio Frequency Interference
Human Factors	Reliability
Measurements, Instruments, Test Equipment	Semiconductors, Solid-State Devices
Medical Electronics	

Departments are identified by the following keys:

ART Article	EDN ELECTRONIC DESIGN News	PF Product Feature
DD Design Decision	GA German Abstract	PT Practical Theorist
DYF Designing Your Future	IFD Idea for Design	PT Russian Translation
ED Engineering Data		SR Staff Report

Circuits, Mathematical Analysis

Amplifier test method uses no external sourceIfD p74 Jan 4	Circuit modification speeds square-wave rise timeIfD p92 Jan 18
Amplifiers, low-frequency, high-gain, ground rules for—Part 1ART p56 April 12	Coax connector template speeds schematics drawingsIfD p73 Jan 4
Amplifiers, low-frequency, high-gain, ground rules for—part 2ART p62 April 26	Combining power levels in dbART p62 Jan 4
Attenuation equalizers, key to designing—Part 1ART p94 Feb 15	Compact reactor slaves silicon rectifiers
Attenuation equalizers, key to designing—Part 2ART p84 March 15IfD p107 Feb 15
Audible alarm device activated by warning lightIfD p68 May 24	Constant percentage gate operates over wide rangeIfD p73 June 7
Biased reed relays recognize polarity	Cross-coupled differential amplifier has low input impedanceART p64 June 7
.....IfD p92 March 15	Current limiter protects amplifier supplyIfD p72 March 1
Bootstrap circuit uses grid bias to obtain linear chargingIfD p70 April 26	Decoupling capacitor eliminated by bifilar transformerIfD p108 Feb 15
Capacitor reduces noise in differential amplifiersIfD p72 April 26	De amplifier stability under radiation
.....DD p102 March 15
		Double-tuned circuits, an easy way to find input impedance ofART p66 April 12
		Dual output flip-flop drives npn or pnp logic
	IfD p68 June 7
		Electronic integrator covers long time intervalsGA p116 March 15

INDEX OF ARTICLES

Extending the range of pi network tank circuitsIfD p66 June 21
 Fast squaring circuit preserves phase informationIfD p74 March 1
 Fickle constant-K filterPT p71 May 24
 Filter network design, calculator speedsART p90 Feb 15
 Finding frequency response the easy wayPT p75 Jan 4
 Flip-flop reset uses no added componentsIfD p102 Feb 15
 Flip-flop switch eliminates contact bounceIfD p70 June 21
 Folding technique extends function generator rangeIfD p82 May 10
 Gaussian pulses, generating ...GA p76 May 24
 High-frequency buzzer supplies neon lamp test voltageIfD p104 Feb 15
 Hybrid circuit produces stable current supplyGA p114 March 15
 Improving response of class-A power output stagesIfD p98 Jan 18
 Inductor winding chart for resistor coil formsIfD p70 June 7
 Input pulse width controls simple ramp generatorIfD p70 June 21
 Integrated circuit for consumer gear shows design trendEDN p28 March 29
 Isolation unit amplifies dc currents and voltagesIfD p81 May 10
 Iterative networks networksPT p77 April 26
 Jury-rig coil winder employs pencil sharpenersIfD p84 May 10
 LC filters, graphical design of, for dc power suppliesART p84 Jan 18
 Lamp heating time speeds schematics drawingsIfD p70 Jan 4
 Limit-cycle amplitude and frequency, finding...ART p72 Jan 18
 Linear ramp generator has adjustable outputIfD p70 Jan 4
 m-derived filterPT p73 June 21
 Magnetic tape detects sections of rotating wheelIfD p80 May 10
 Modification converts one-shot multivibrator to voltage controlIfD p65 March 29
 Motor control system isolates ac lines from dc circuitsIfD p72 April 26
 Mousetrap generator builds a better pulseIfD p97 Jan 18
 Moving off the axisPT p69 March 29
 Nanoampere sensing circuit has 100-megohm input impedanceIfD p88 April 12
 Neon bulb string makes expanded-scale voltmeterIfD p95 March 15
 One-shot generator gives variable pulse widthIfD p63 Feb 1
 One-shot multivibrator allows voltage controlled pulse widthIfD p60 Feb 1

Poles along the axisPT p79 March 1
 Programmed video gain control is linear over 6-db rangeIfD p64 Feb 1
 Rf amplifiers, quick calculations forART p52 June 21
 Ramp gate maintains constant PPI intensityIfD p90 Jan 18
 Readout tube displays alphanumeric symbolsPF p172 June 7
 Reset line gates lf shift registerIfD p62 Feb 1
 RC-coupled amplifiers, rapid design ofED p105 March 15
 Resistance transformation with minimum attenuationGA p70 Feb 1
 Resistive ladder networks, calculating attenuation errors inGA p117 Feb 15
 Resistor tolerances, how important?ART p44 March 29
 Sampled-data analysis, extending to nonlinear systemsART p74 March 15
 Selective af amplifier has simplified feedback circuitIfD p102 Feb 15
 Self-checking method for solving higher-order circuit equationsART p68 May 10
 Series-shunt regulated supply improves transient regulationIfD p76 April 26
 Simple comparator circuit allows quick capacitance checkIfD p69 June 21
 Simple filtersPT p65 Feb 1
 Simple vlf receiver uses single tuned stageIfD p95 Jan 18
 Simple voltage regulator has wide-range outputIfD p72 June 7
 Square-wave doubler uses four-layer diodeIfD p60 Feb 1
 Stable dc amplifier makes good level changerIfD p66 March 29
 Starter circuit guides counter-tube beamIfD p77 March 1
 Synchro resolver provides wide range variable inductanceIfD p66 June 21
 Systematize your design stepsART p66 March 15
 Systems analysis: Getting around discontinuitiesART p48 June 7
 Systems analysis, take drudgery out of with state-variable techniques ...ART p78 Jan 18
 Three-transistor buffer offers lower offset and driftIfD p71 June 21
 Time-mark generator features fast risePF p174 June 7
 Transistor switch cuts arcing, increases relay sensitivityIfD p75 March 1
 Transistorized fm receivers, double conversion improvesIfD p100 Feb 15
 Triggered bistable circuit generates large, fast pulsesDD p100 March 15
 Tristable trigger circuits, designingRT p74 May 24
 Tuned relay coil switches at low currentIfD p68 June 7
 Unijunction oscillator insures that power converter will startIfD p72 March 1

RESISTOR APPLICATION NEWS

WHAT PRICE STABILITY?

FACT — PyroSeal® Resistors have unsurpassed stability

FANCY — Since pyrolytic carbon is intrinsically stable . . . all carbon film resistors are stable

PyroSeal® Carbon Film Resistors
 Proven Superior, Less Costly!

The stability of any carbon film resistor is only as good as the method of protecting the film from impurities. Thus, evaluation of any claim for stability must take the encapsulation method into consideration. Pyrofilm's patented PyroSeal® process insures the ultimate perfection in sealing and protection of the resistive element. Result — unparalleled stability. Stability can be proven on paper, but is insufficient without field performance to back it up. Pyrofilm has both: Guaranteed stability, field proven for over 10 years in the most critical military and commercial designs. Plus, an exclusive test report "20,000 Hour Load Life Test" that statistically proves PyroSeal® resistors are superior for long-term reliability and stability.

The unusual stability shown by Pyrofilm resistors has been used to great advantage in the designing of critical circuitry where closer tolerances over wide temperature ranges has become more acute. Typically, PyroSeal® resistors are suitable for use in networks where ratios must be maintained to .01% and temperature coefficients must be matched to 1 ppm/°C.



Resistor Networks Matched to .01% in Resistance and in Temperature Coefficient to 1 ppm/°C. What does 1 ppm/°C. Temperature Coefficient match mean to you? It means that the ratio of resistance values will not change more than .01% between 25°C. and 125°C. Possible only with stable PyroSeal® Resistors.


Applications Satisfied Only By Pyrofilm Stability

- Resistor/Capacitor Networks in a 1" cube with resistors matched to ¼% in resistance and 1 ppm/°C. in temperature coefficient.
- Amplifier Comparator with 45 pairs of resistors matched to a lead resistor within .1% and 2 ppm/°C.
- 5 step midsection attenuator, with each resistor section within .1% and 30 ppm/°C. of every other.
- Five ½W resistors from 100K to 20 Meg. matched from .02% and 1 ppm/°C. to .1% and 10 ppm/°C. over the temperature range of 0 to 70°C.
- An 18 KV Divider operating over a temperature range of +10°C. to +65°C., an altitude of 10,000 ft. and relative humidity of 100% while maintaining a ratio accuracy of 2% under all environmental conditions.

**PYROFILM
 RESISTOR
 COMPANY, INC.**

3 SADDLE ROAD • CEDAR KNOLLS, N. J.
 JEFFERSON 9-7110

ON READER-SERVICE CARD CIRCLE 61
 ELECTRONIC DESIGN

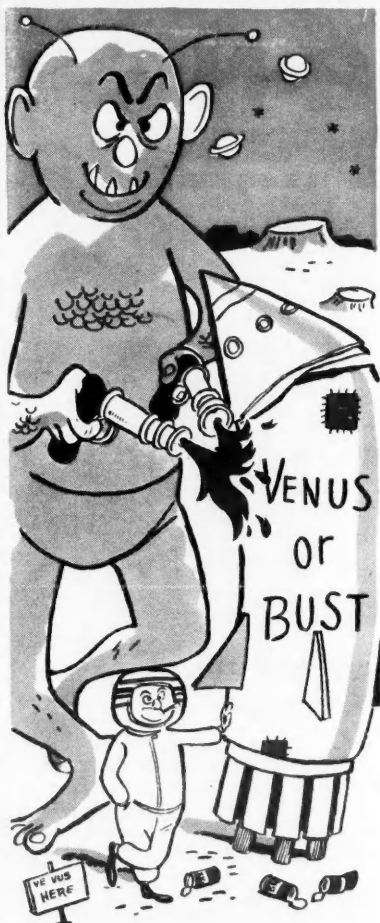

Got Big Problems With Heat and Radiation? Try TIMM Circuits!



Only TIMM circuits (thermionic integrated micro modules) tolerate constant temperatures up to 700°C— or nuclear radiation up to 10^{19} nvt steady state and 10^9 R/sec pulses. No other components can make this claim—or even approach it.

Get a TIMM kit and some sample circuit elements. Flexible breadboard techniques let you quickly create any circuit combination desired. And you can use TIMM components over and over again. For your copy of a hot-off-the-press TIMM Status Report, write today to: TIMM, Room 7012, General Electric Company, Owensboro, Kentucky.

Progress Is Our Most Important Product

GENERAL ELECTRIC

ON READER-SERVICE CARD CIRCLE 62

July 19, 1963

Versatile phase detector provides multiple functionsIfD p78 May 10
Voltage level detector gives sensitivity at low costIfD p100 Feb 15
Wide range pulse detector gives linear dc outputIfD p70 June 7
Wire table gives quick IR drop dataIfD p73 June 7
Wirewrap pattern simplifies circuit alterationsIfD p94 March 15

Communications, Methods and Equipment

Channel shift for mobile radios, FCC urged to act onEDN p14 Jan 4
Receiving systems, calculating sensitivity of... ED p85 May 10
Troposcatter uhf system considered for shipboard useEDN p22 June 7

Components (See Microwaves, Semiconductors)

Arc suppressor relay senses zero-crossing pointIfD p62 March 29
Capacitors, voltage saturable, what they are, what they can doART p50 April 12
Ceramic-to-metal filters, guideline for designingART p56 Feb 1
Delay lines, design chart for constant-K..... ED p115 Feb 15
Delay lines feature impedance, Nsec timesPF p98 Feb 1
Dc relay draws extremely low currentIfD p91 Jan 18
Fiber optics: designing in a new lightART p38 March 29
Glass-fiber insulators find increasing useGA p79 June 7
Line corrector features immediate response ... PF p132 May 24
Liquid gyros, three approaches show promiseEDN p4 Jan 18
Nuclear gyroscope, magnetic induction, appears feasibleEDN p18 Jan 4
Panel meters, 25 things to know aboutART p44 April 26
Photosensitive plastic develops images instantlyEDN p33 May 10
Potentiometers, conductive plastic, provide non-linear outputsPF p110 March 29
Relay sequencing circuit requires minimum of componentsIfD p83 May 10
Resonant reed relays make simple scope markerIfD p66 May 24
Single-relay circuit controls sweep voltage limitsIfD p105 Feb 15
Toroids: how to use them at high frequenciesART p78 April 12

Computers, Data Processing, Auxiliary Devices

Associative memories: a many-pronged design effortSR p40 Feb 1
Automata designers get help from new conceptual toolsEDN p22 March 1
Bionics: rising interest fosters growthEDN p4 April 12
Circuit simulation: a potent tool takes shapeEDN p4 April 26
Computer technique applied to Army's peer-rating systemEDN p36 May 24
Computers—Design '63SR p50 Jan 4
Computers in parallel, 1024 small ones coming upEDN p4 Jan 4
Computers learn human use of symbolsEDN p8 June 21
Computers, new twists to old techniquesEDN p22 Jan 4
Design steps, systematizeART p62 March 1
Differential 'exclusive OR' reduces logic modulesIfD p97 March 15
Low cost terminals triple phone, TV link data ratesEDN p8 Jan 18
Magnetic films, unusual, may improve computer memoriesEDN p20 May 10
Memories by the yard: interest revives in plated wire fabricsEDN p26 May 10

Computers

Modified NOR circuit automatically presets flip-flopIfD p67 May 24
'Nanophile' computers, organizingART p44 March 1
Pulse energy, time compared in 3-D in 20,000 channelsEDN p38 March 15
Quad-redundant analog circuitry devised for OSO's telemeterEDN p4 March 1
Self-biased TF memory has nondestructive read-outEDN p8 April 26
Series regulator gives binary-analog conversionIfD p66 March 29
System side of digital design ..SR p43 March 1
Thin-film memory offers 300-nsec cycle time ... PF p210 May 10
13,000-parametron computer, fastest train taking shapeEDN p30 Feb 15
30-msec delay line stores analog, digital data... PF p110 March 29
3-level binary code doubles data rateEDN p28 March 1
TD logic circuits used in nanosecond register-counterEDN p35 April 12
Two films per bit read every 120 NsecEDN p28 June 7
Versatile amplifier-switch for hybrid logic ... EDN p4 March 15
Waffle-iron memory structure offers sub-micro-sec speedEDN p28 March 15

INDEX OF ARTICLES

Worst-case conditions, evaluating
.....ART p54 March 1

Consumer Electronics

Electronics goes to the fair EDN p18 May 10
Fm stereo indicator uses minimum of compo-
nentsIfD p71 April 26
IEEE convention and show—special section ...
.....SR p54 March 15
Tokyo fair geared to novel consumer, research
devicesEDN p33 June 7

Human Factors

Can a psychologist guide your career?
.....DYF p90 April 26
Human factors men taking operators out of black
boxEDN p30 June 7
Industrial designer—more than just an artist
.....DYF p102 May 10
Is the company well managed? DYF p134 Feb 15
It's easy to write—or is it? ...DYF p130 Jan 18
Pioneer speaks out—exclusive interview with
Dr. Vladimir Zworykin ...EDN p30 Jan 18
Proposal writing, is there a system?
.....DYF p80 May 24
Stupidity: your hidden resource
.....DYF p136 March 15

Measurements, Instruments, Test Equipment

Antenna range system speeds scanning, record-
ing, plottingPF p236 Feb 15
Deviation chart improves bridge accuracy
.....ART p60 May 24
Fiber-optics meter relay features proportional
controlPF p134 March 1
Generator features wide range control
.....IfD p82 April 12
Hall-effect probe serves as vibration transducer
.....IfD p73 Jan 4
In-place coil tester shows shorted turns
.....IfD p86 April 12
Low-loss diodes reverse meter polarity
.....IfD p69 May 24
Malfunction indicator employs filament trans-
formerIfD p73 April 26

Q-meter can test at high power levels
.....IfD p73 April 26
Simple voltage calibrator has stable 10-Kc out-
putIfD p96 March 15
Thin-film Wheatstone bridge uses matched resi-
stive ladder networksPF p234 Feb 15
Transistorized Q-meter is portable and stable ..
.....IfD p84 April 12
Using Hall effect to make angular measurement
.....IfD p66 May 24

Medical Electronics

Heart's electric vectors shown in 3-D
.....EDN p26 March 29
Medical field seeks better skin-impedance data
.....EDN p8 May 24

Microwaves


Coaxial connector reduces vswr errors
.....RT p110 March 15
Curved surface-wave antennas, experiments with
.....RT p104 Jan 18
18-ft TWT to test tube efficiency at high altitude:
News from BritainEDN p34 March 1
Hardware, new, fills gaps for mm-wave designer
.....EDN p8 Feb 1
Improved lasers and silicon devices stand out at
IEEEEDN p8 April 12
Improving the directivity of a directional couple
.....RT p68 Feb 1
Laser, afc, stabilizes communication system ...
.....EDN p4 June 7
Laser light beam rotation sensor has pulsed read-
outEDN p14 March 1
Lasers—Design '63SR p36 Jan 4
Laser modulated in optical cavity by 2 new
methodsEDN p14 April 26
Lasers, new family of, uses chelates
.....EDN p18 March 15
Magnetic fields, small, modulate laser crystals .
.....EDN p8 May 10
Many phases of microwave design
.....SR p40 May 10
Matching waveguides to slow-wave structures
.....RT p84 June 7
Measuring microwave power with the Hall effect
.....RT p118 Feb 15
Microwave noise sources, NBS to calibrate at
BoulderEDN p38 Feb 15
Microwave system analysis, chart speeds
.....ED p77 June 7
Microwaves—Design '63SR p46 Jan 4
Pulse-frequency modulation used with diode laser
.....EDN p7 June 7

2 NEW KELVIN BRIDGES



4288 COMPACT D-C KELVIN BRIDGE

For rapid testing of low-resistance wires, rods,
carbon brushes, windings and other electrical
conductors. Range, 0.0001 to 11.00 ohms. Limit
of error, $\pm 1\%$ of reading. Completely self-con-
tained, with batteries and galvanometer. Metal
case with handle, 7" x 6" x 5"; Weight, 5½ lb.



4287 PRECISION D-C KELVIN BRIDGE

For measurement of low-resistance . . . wires,
rods, windings, resistors, etc. . . with labora-
tory accuracy. Range, 0.0001 ohm to 110.100
ohms. Limit of error, $\pm 0.05\%$ of reading or
better. Completely self-contained, with batteries
and light-beam galvanometer. Metal case with
handle and slip-hinged removable lid, 14¼" x
11½" x 7½" overall; Weight, 23½ lb.

For additional information contact your nearest
L&N office or write for literature to Leeds &
Northrup Company, 4908 Stenton Avenue, Phila-
delphia 44, Pa.




Pioneers in Precision

LEEDS & NORTHROP CO

ON READER-SERVICE CARD CIRCLE 63

ELECTRONIC DESIGN


Voltage and Balance Panel

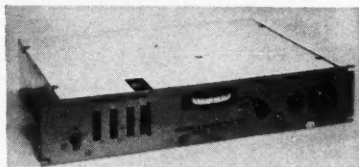

VB-300 combines three precision monitoring instruments in 3½" of rack space, at less than their usual cost. Digital readout voltmeter provides measurement and setting of bridge excitation voltage to any value between 1 and 20. Bridge output meter permits measurement of static strains in terms of bridge output voltage to any value between 0 and ±100 mv. Null indicator allows bridge balancing within ±10 μV of zero.

ON READER-SERVICE CARD CIRCLE 876

Transducer Signal Conditioning

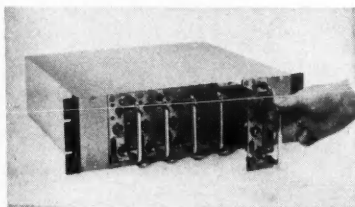

Two new transducer and strain gage signal conditioning units feature radically different packaging concept at low cost per channel. Both the PS-290 Power Supply and PB-290 Power and Balance Unit incorporate plug-in card circuits for up to eight channels in a 19" rack, 5¼" high. Bridge completion balancing, and calibration resistors are easily accessible from the front. Output ripple is less than 500 microvolts peak-to-peak, or 200 microvolts RMS. Line regulation is less than 0.02%. Isolation is less than 0.01 microamps of 60 cycle current. Output impedance is less than 0.05 ohm.

MICRODOT INC.



220 Pasadena Avenue
South Pasadena, California
Overseas: MICRODOT AG, Zug, Switz.

ON READER-SERVICE CARD CIRCLE 877
July 19, 1963

Raman-effect laser uses organics EDN p28 Jan 18
Raman effect yields vari-colored rings from laser beamsEDN p14 May 10
Solid-state X-band radar ready for spaceEDN p4 Feb 1
Stable frequencies with tandem-resonator masersRT p92 April 12
Thin-film circuits invade mw regionEDN p4 June 21
Two-diode paramp provides nonreciprocal gainGA p84 April 26

Missiles and Space

Automatic checkout equipment: paving blocks to spaceSR p42 Jan 18
Bistatic radar techniques may unlock lunar secretsEDN p8 March 29
Major budget rise set for defense, space electronicsEDN p14 Feb 1
NASA gets first Apollo PAM-FM/FM telemetry unitsEDN p23 Jan 18
Nuclear environments, simulation of: A handy design toolART p72 April 17
Soviet Mars probe may support theory on magnetic fieldEDN p34 March 15
Space communication—Design '63SR p38 Jan 4
Stellar spectra to be seen first time from spaceEDN p28 Feb 1

Packaging Techniques, Production Processes and Equipment

Assembly-line thin-film circuits not far off ...EDN p4 May 10
E-beam processor ordered for Navy microcircuit labEDN p28 April 26
Epoxy potting's moisture resistance, what determines?ART p56 April 26
Flat films get their second windEDN p4 May 24
'Fluid circuits' miniaturization studies by CorningEDN p36 March 15
Hybrid technique yields microminiature amplifier of tested circuitryPF p156 April 26
Microcircuits, changing perspective inSR p45 Feb 15
Microcircuits, semiconductor, gain systems roleEDN p8 Feb 15
Micromin-computer power supplies may be fragmentedEDN p16 June 21
Stress-packaging technique lightens satellite loadDD p100 Jan 18
Thin magnetic film on wire makes novel A/D encoderEDN p32 May 24

Traveling carriage cuts test lead lengthDD p88 May 10
Welded modules, five factors in designingART p44 April 12
Zoom viewer magnifies aerial photos electronicallyDD p110 Feb 15

Power Sources

A/D converter uses pulse width modulationRT p108 March 15
DC/AC converters, getting maximum efficiency inART p36 April 26
Direct thermionic conversion works prolonged testEDN p30 May 24
Nuclear space power plants, AEC contracts spur quest forEDN p28 May 24
Power sources: prototypes flex muscles, but ...EDN p30 June 21
Research fuel cell uses hydrocarbon, is self-sustainingEDN p34 Feb 1
Thermocouple IR detectors for spaceEDN p18 June 7

Radio Frequency Interference

RFI test concepts for complex systemsART p58 Jan 4
Spectrum signature measurements: radar systemsART p52 March 15
Spectrum signature measurements: more on RadarART p42 May 24

Reliability

Reliability—Design '63SR p56 Jan 4
Reliability: let's look at the mission profileART p50 April 26
Reliability methods use field data, computersEDN p4 Feb 15
Reliability tradeoff: circuit redundancy vs circuit checkoutART p74 May 10
System reliability using redundant elementsGA p78 Jan 4

Semiconductors, Solid-State Devices

Applying temperature compensation to blocking oscillatorsART p60 April 12
Diode capacitance gives linear sawtoothRT p82 June 7
Diode induces fluorescence in laser crystalEDN p18 Feb 1


INDEX OF ARTICLES

Diode lasers use indium phosphide, indium arsenideEDN p14 May 24
 Diode sets flip-flops for initial state at turn-onIfD p62 March 29
 Diode switch oscillator yields multiple outputsIfD p80 May 10
 Dual-frequency multivibrator employs transistor switchingIfD p87 April 12
 Dual voltage power uses dual-purpose transistorsIfD p78 March 1
 Extending operating range of unijunction timing circuitsIfD p69 May 24
 Field-effect devices on transistor curve tracers, testingIfD p96 Jan 18
 Field-effect transistors boost voltmeter input impedanceIfD p71 June 7
 Field-effect transistors for redundancyART p74 Jan 18
 Field-effect transistors: product surveySR p66 April 26
 Full-wave SCR relay gives undistorted outputIfD p68 June 21
 GaAs leading to new class of optical devicesEDN p4 March 29
 High efficiency power transistor delivers 1 w at 500 McPF p130 May 24
 Hybrid current regulator covers wide rangeART p48 June 21
 Insulated-gate field-effect devices prove feasible for productionEDN p18 March 1
 Integrated circuit uses field effectEDN p7 March 15
 Integrated circuits—Design '63 ..SR p32 Jan 4
 Integrated circuits: designers learn new tricksEDN p8 March 15
 Light demodulator detects, amplifiers externally for wider rangeEDN p26 April 12
 Linear waveforms with field-effect transistors, generatingART p66 Jan 4
 Logic of counter circuits design ART p68 Jan 18
 Low voltage transistor controls neon displayIfD p69 June 7
 Molecular electronic blocks perform variety of functionsPF p118 Jan 4
 Noise in transistors, better way to measureART p46 March 15
 Noise in tunnel-diode parametric amplifiersGA p96 April 12
 Operational amplifiers, designingART p56 March 29
 Photocell in feedback circuit regulates outputDD p76 June 21
 Photo-chemical circuit technique eliminates masksEDN p22 Feb 1
 Process-control system has silicon semiconductorEDN p30 March 1

Putting variable capacitance diodes to work in tuning circuitsEDN p48 May 24
 Recovery effects in diode switches, computingART p50 March 29
 Sensors, lack of efficient, plagues industrial-control system designEDN p18 April 12
 Series SCR inverters, designing ART p62 June 21
 SCRs, gateless, produce low cost domestic dimmerDD p90 April 12
 SCR multivibrator yields 20 Kv from 20-v input at a low costIfD p70 April 26
 Simple curve tester gives fast transistor dataIfD p64 May 24
 Single-block linear amplifier circuits combine npn and pnp transistorsPF p228 Jan 18
 Solid-state telemetry receiver, Navy's, will cover three bands below 2.3 Gc ...EDN p28 Feb 15
 Stabilized emitter follower with increased input impedanceRT p80 April 26
 Step-function charts speed filter transient analysisART p58 June 7
 Storage charge: better way to specify transistor switchesART p84 Feb 15
 TaSi: microcircuits, 'tunnel resistor' unveiledEDN p8 June 7
 Testing unijunction units on transistor curve tracersIfD p68 June 21
 Transistor data chart, eleventh annualSR p70 May 24
 Transistor ignition system improves engine performanceIfD p84 April 12
 Transistor mounting simplified ART p52 May 24
 Transistor transmitter has high-level dsb modulationIfD p98 March 15
 Transistor Zener circuit shows negative-resistance characteristicIfD p104 Feb 15
 Transistorized power supplies, speaking ofART p58 March 15
 Transistors—Design '63SR p40 Jan 4
 Transistors regulate high-voltage supplyGA p80 June 7
 Transistors widen range of phase-sensitive detectorsGA p78 June 21
 Translator design, novel method simplifiesART p80 March 15
 Tunnel-diode capacitance, measuringGA p90 May 10
 Tunnel-diode mixer uses thin films, operates to 400 McEDN p14 June 7
 Tunnel-diode oscillators: Don't sell them shortART p68 March 1
 TURTLE: a new logic tailored for microcircuits—Part 1ART p42 June 7
 TURTLE: a new logic tailored for microcircuits—Part 2ART p56 June 21
 Unijunction oscillator gives 30-sec sweepIfD p78 May 10
 Variable capacitor shows square loop; may reIfD p106 Feb 15
 Zener diode reduces Schmitt trigger hysteresisIfD p106 Feb 15

PULSE POINTERS


Double Pulse Generator Recommended For Semi-Automatic Checkout Systems



Model 2140A Precision Double Pulse Generator

Fast rise time, calibrated controls, separate or mixed signals—Pulse simulation and control problems are easily resolved over a broad range by the multiple capabilities of SERVO PULSE™ Model 2140A Precision Double Pulse Generator. Reliable output parameters allow immediate use of the equipment without calibration and monitoring instruments. Model 2140A offers wide-range adaptability to special purpose applications through the use of standard pulse and digital circuit modules.

Compact, Medium-Power Pulse Generator Features Modular Adaptability



Model 3350A Pulse Generator

Fast rise time pulses are fully controllable in a variety of parameters—Model 3350A Pulse Generator offers broad performance range in a unit designed for console mounting. Uses include pulse circuit design and testing of RADAR, navigational systems, digital computers, and control systems. It may be operated from the internal oscillator, slaved to an external trigger, or used single shot by pushbutton for transient testing. SERVO PULSE™ Model 3350A has 2 mc-2 cps rep rate and 10 nanosecond rise time.

For complete details, write:

SERVO PULSE™ PRODUCTS
SERVO CORPORATION OF AMERICA



111 New South Road
 Hicksville, L. I., N. Y.
 WEils 8-9700

ON READER-SERVICE CARD CIRCLE 65
 ELECTRONIC DESIGN

