


radio valve data

Compiled by **WIRELESS WORLD**

seventh edition

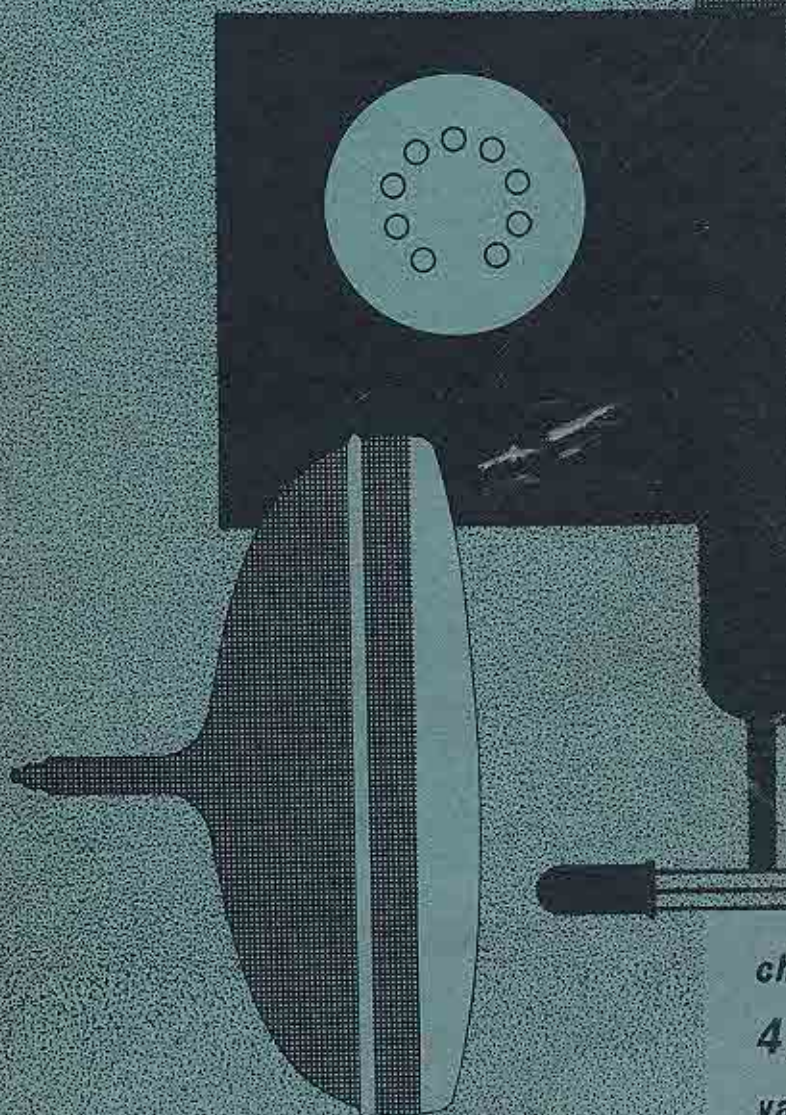

*characteristics of
4,800
valves,
transistors,
rectifiers and
cathode ray tubes*

SIX SHILLINGS NET
over 236,000 copies sold

RADIO VALVE DATA

**Characteristics of 4,800 Valves, Transistors, Rectifiers
and Cathode-Ray Tubes**

Compiled by the staff of " WIRELESS WORLD "

First published February, 1949

Seventh Edition, © Iliffe Books Ltd., 1961

LONDON - ILIFFE BOOKS LTD

CONTENTS

Explanation of the Tables	PAGE 3
Tables of Valve Characteristics :	
Barretters	90
Cathode-ray Tubes for television— instrument and special purpose types—directory of manufacturers	97 103
Diodes	
efficiency, for television	102
high power, semiconductor (Semiconductor Recti- fiers)	81
low power, semiconductor	46
low power, thermionic	44
Efficiency Diodes	102
Frequency Changers	7
Output Valves	
push-pull (Output Valves 2)	36
single-ended use (Output Valves 1)	26
television line scan (Output Valves 3)	42
Pentodes and Tetrodes, Screened	15
Rectifiers	
copper oxide and selenium (Metal Rectifiers)	77
E.h.t., for cathode-ray tubes	86
high-power semiconductor (Semiconductor Recti- fiers)	81
valve, for h.t. supplies (Valve Rectifiers)	70
Thyatron's	95
Transistors	
junction	49
point-contact	49
symmetrical	49
Transmitting Valves	68
Triodes, low power (Amplifier Triodes)	59
Tuning Indicators, cathode-ray	88
Voltage Stabilizers	
valve	90
semiconductor (Zener Diodes)	93
Zener Diodes	93
Explanation of Valve-base Connections	104
Valve Base Diagrams	105
Trade Names and Manufacturers' Addresses	123
Index, Base Connections and Valve Equivalents	124

GENERAL ABBREVIATIONS

Used in Valve Data Tables

* appended to the "Heater Volts" column indicates a directly-heated cathode (that is, filament). Valves without the asterisk have indirectly-heated cathodes.

† appended to the "Heater Amps" column indicates that the valve has a centre-tapped filament or heater. The figures given are invariably for the parallel connection of the two parts; for the series connection the voltage is doubled and the current halved.

(Some directly-heated valves of low current consumption may need the connection of a resistor across one half of the filament when using the series connection.)

Valve Abbreviations

a—a	Anode-to-anode
BT	Beam tetrode
C_{ak}	Anode-cathode capacitance
C_{xa}	Grid-anode capacitance
C_{ak}	Grid-cathode capacitance
CT	Centre tap
D	Distortion
DD	Double-diode
DBT	Double-beam tetrode
DP	Double pentode
DT	Double triode
F.W.	Full-wave
g—g	Grid-to-grid
g_c	Conversion conductance
g_m	Mutual conductance
H.W.	Half-wave
H	Heptode
H_x	Hexode
I_K	Cathode current
MV	Mercury vapour
O	Octode
P	Pentode
P_a	Anode dissipation
PIV	Peak inverse volts
R	Rectifier
r_a	Anode a.c. resistance
R_K	Cathode bias resistance
R_L	Optimum load resistance
SD	Single diode
SE	Secondary emission
SQ	Special Quality
T	Triode
TD	Triple diode
TH	Triode heptode
TH_x	Triode hexode
TP	Triode pentode
TT	Tetrode
VD	Voltage-doubler
VM	Variable mu

Transistor Abbreviations

P_c	Collector dissipation at 25°C
V_c	Collector volts
I_c	Collector current
I_e	Emitter current
$r_b=r_b'$	Base resistance
$r_e=r_e'$	Emitter resistance
r_c	Collector resistance
r_c'	Collector resistance (common-emitter con- nection)
r_m	Mutual resistance
α'	Current gain (common-emitter connection)
α	Current gain
$f_{c\alpha}$	Alpha cut-off frequency
I_{c0}	Collector current at $I_e=0$
$r_e=r_e'(1+\alpha')$	

Published for "Wireless World" by Iliffe Books Ltd., Dorset House, Stamford Street, London, S.E.1 and printed in England by Cornwall Press Ltd., Paris Garden, London, S.E.1 BKS 3822

EXPLANATION OF THE TABLES

THE INFORMATION GIVEN refers to the main electrical characteristics of valves together with their base connections. Physical dimensions are not included since there is a limit to the amount of information which it is practicable to give, and size is only occasionally an important factor in the choice of a valve.

The valves are classified under main headings according to their type. In each section they are divided according to their make and then sub-divided into obsolete, replacement and current types. The tables are largely self-explanatory, but the following notes should be read carefully if the tables are to be fully understood.

Limitations of space necessarily restrict the amount of information which can be included in these tables, so designers requiring more detailed information should consult the valve manufacturers' published literature. Also to economise on space a valve listed by a particular manufacturer as "obsolete" may not appear under that manufacturer's name, but will appear under another manufacturer's heading.

FREQUENCY-CHANGERS

Valves in this section are intended primarily for use as frequency-changers in superheterodynes and the figures given are the normal operating conditions for this application. Some of the valves included are occasionally used for other purposes, however, and the voltages and currents may then be very different. Even in their normal application differences may be found in individual receivers, since not all designers adopt the "normal" conditions; this is particularly so on short-wave bands.

It is to be noted that some valves which do not include an oscillator section, and which thus apparently require a separate oscillator, can actually be used as complete frequency-changers by using an oscillator circuit coupled between cathode and another electrode.

SCREENED TETRODES AND PENTODES

The main application of valves in this section is to r.f. and i.f. amplification and the operating conditions are normal ratings for this condition. No distinction is made between tetrodes and pentodes because in most cases the type of valve is immaterial as long as its characteristics are otherwise suitable. It is only important in special applications, where separate use is made of the suppressor grid, and then the normal characteristics are in any case insufficient to enable a choice of valve to be made. Except where the suppressor grid (g_s) is internally connected, it is possible to determine whether a valve is a tetrode or a pentode by reference to the valve-base connections.

Some of the valves in this section are also listed under Amplifier Triodes. The characteristics given there are obtained with the screen-grid connected to the anode.

Many of the valves are suitable for use in R-C-coupled a.f. amplifier stages. When so used the voltages applied to the electrodes and the currents obtained are very different from the r.f. amplifier condition. They cannot readily be given, however, since they are as much a property of the circuit values as of the valve.

OUTPUT VALVES 1

Triodes, beam tetrodes and pentodes are all included here with normal maximum operating conditions as output valves for single-valve Class-A operation for a.f.

application. They are distinguished by the letters (T), (BT) and (P) following the type number and those containing other systems have additional letters (SD), (DD) and (T) for single or double diode and triode, respectively.

A few contain the elements of an h.t. rectifier in addition and these are distinguished by the letter (R).

In some cases the conditions for a tetrode or pentode operating as a triode with the screen-grid joined to the anode are also given. This condition can be distinguished by the absence of a figure for screen voltage, but in addition the letter (T) placed after the type number indicates that the conditions are those of a triode. The fact that the electrode structure is that of a tetrode or a pentode is obvious as the valve appears in another row followed by letters (BT) or (P).

Even under Class-A conditions the anode and screen currents rise with the signal input to a small extent. The anode current with full drive is about 2 per cent. greater than the quiescent value. With some valves the screen current increases much more and may become as high as three or four times the quiescent value. This increase is usually greatest when the valve is of a type drawing a very low quiescent current.

Since there is no standard method of rating valves, the figures quoted in the tables are sometimes for the no-signal condition and sometimes for full drive. It is believed that most of the figures for British valves are for no-signal, whereas most of those for American types are for maximum applied signal.

The matter is mentioned chiefly to explain small differences which may exist between the figures given here and those which may be found in other lists. The differences are, in practice, unimportant for they are less than the normal variations between individual specimens of the same type.

Because of the rising current with drive there is a slight difference in the output powers obtainable with fixed grid bias on the one hand and cathode bias by a resistor on the other. Figures for battery-type valves are invariably for the fixed-bias condition. For other valves there may be some discrepancies since again there seems to be no standard procedure for indicating output. The difference is not large, however, and can be ignored for most purposes. In general, the output with cathode bias is up to 10 per cent less than with fixed bias.

The maximum resistance which may safely be included in the grid-to-cathode external circuit depends on the method of obtaining grid bias. With valves taking more than about 20 mA cathode current it is a safe rule to limit the grid resistor to 0.5 M Ω for cathode bias and 0.1 M Ω for fixed bias.

In individual cases and under particular operating conditions it may be safe to exceed these figures, but this should not be done without close investigation.

OUTPUT VALVES 2

The conditions included here are those for push-pull operation of a.f. output stages. Five modes of push-pull are recognized and distinguished in the "Class" column; they are A, AB₁, AB₂, B₁ and B₂. In Class A both valves are conductive over the whole input cycle and the anode current with full drive is substantially the

same as that with no drive. In Class AB the valves are worked individually under non-linear conditions and may be individually cut-off over a small part of the input cycle; the anode current for full output is appreciably higher than that with no input. In Class B each valve is cut off for about one-half of the input cycle and the anode current at full output is much greater than that with no input signal. The subscripts ₁ and ₂ show that operation is respectively without and with grid current. The anode and screen currents quoted for Class-A and -AB operation are with the maximum input signal voltage; the currents for Class-AB₂, -B₁ and -B₂ operation, however, are subject to considerable variation with input, so it is more useful here to give figures for the quiescent conditions. With Class-AB and -B operation the manufacturer's literature should, in any case, be consulted.

For Classes AB₂ and B₂, the minimum grid-to-grid input resistance is given. The figure, together with that of the input voltage, is necessary for the design of the driver stage.

The valves included in this section fall into two groups. One consists of double triodes and double pentodes intended mainly for Class-B₁ and Class-B₂ operation. They are chiefly battery types which used to be designated as q.p.p. and Class-B stages. There are also a few indirectly-heated-cathode types (for example 6A6) which have other applications; these last will also be found in the appropriate section (usually Amplifier Triodes) with the figures appropriate to one section of the valve as an amplifier.

Figures for anode and screen currents are quoted *per valve* (or per unit in the case of double valves) and in some cases several sets of different figures are given for the same valve under different conditions. Apart from double valves, most of the valves in the section appear also in Output Valves 1, and to distinguish between pairs of valves and double valves, which may not be listed elsewhere, the heater-current figures are given only for double valves (unless otherwise stated). The figures for the others are obtainable from Output Valves 1.

Very few Class-A conditions are given because they are usually obtainable directly from Output Valves 1. For push-pull Class A the currents and anode-to-anode load are normally twice the figures for single-valve operation. The power output for the same odd-order distortion is usually a little more than double.

The differences between fixed-bias and cathode-bias are considerable under Class-AB and Class-B conditions. Where no value is quoted for a bias resistor it is to be understood that operation with a fixed bias is required; where a bias-resistor value is given, the other figures refer to cathode-bias operation. With fixed bias, it is usually necessary for the bias source to be of low impedance; with positive drive it is essential.

The value of bias resistor quoted (R_K) is that required per valve, or per unit in the case of double valves.

OUTPUT VALVES 3

The valves in this section are designed to withstand short-duration high-voltage peaks and the figures given are for television line-scan output-stage working.

The amount of information provided in this section

is necessarily limited, and operating conditions vary so widely with circuit application that in all cases of doubt the manufacturer's literature should be consulted.

THERMIONIC DIODES

The main characteristics required to be known about a diode are given here. Some of the double types have a common cathode, whereas others have separate cathodes. These can be distinguished by reference to the valve-base connections. Some guidance to the internal resistance of a diode is given by the column giving the maximum rectified current: high-current types are invariably of lower resistance than those for low current.

Multiple valves which include diodes are not listed here but will be found under the section appropriate to the main assembly of the valve; that is, Screened Tetrodes and Pentodes, Amplifier Triodes and Output Valves 1.

SEMICONDUCTOR DIODES

This section includes copper-oxide, selenium, germanium and silicon diodes with ratings not exceeding 300 PIV and 100mA maximum rectified current, i.e. the devices listed here are intended mainly for signal operation rather than power rectification (although many can be used as low-power rectifiers). Other diodes are listed in the Semiconductor Rectifiers (silicon and germanium) and Metal Rectifiers (copper oxide and selenium) sections, except when the inclusion of a particular device there would obviously be wrong—the G.E.C. Type SCVI, for instance, is designed for use as a voltage-dependent capacitor. Maximum ratings are given and in one column typical applications are listed.

JUNCTION TRANSISTORS

Unless otherwise stated, parameters are given for a temperature of 25°C. Comparisons between various types should be made only at the same temperature; in cases of doubt fuller data should be consulted but, in general, the major effects of elevated temperature are to reduce the permissible dissipation and increase the collector leakage current I_{co} . (This approximately doubles for each rise of 10°C and can affect bias conditions with unsuitable circuit arrangements.) Other characteristic changes which take place with temperature are of a relatively minor magnitude and in many cases may be ignored.

The figure for $V_{c\ max}$ should never be exceeded in normal use. In many circuits the maximum allowable h.t. rail voltage will be half this figure.

The small-signal parameters chosen for tabulation are the conventional equivalent-T network ones for the common-emitter configuration. This is by far the most common circuit arrangement in use with junction transistors. Corresponding figures for common-base and common-collector arrangements are easily derived.

The collector voltage and current at which the small signal parameters are given is defined. This is important since some of the parameters vary considerably with the bias point. In particular there is a large increase in r_c with decreasing I_c .

The figure for alpha cut-off is for the common base configuration and is lower by a factor of approximately α' for the common-emitter arrangement. No attempt

is made to specify large signal behaviour. In general the most important departures from the figures quoted for small-signal conditions are likely to be decreased r_c and decreased μ' . The table on Page 2 explains the symbols used.

AMPLIFIER TRIODES

The conditions given are those pertaining to operation as transformer-coupled a.f. amplifiers at maximum rating, which is the most suitable condition for comparing valve characteristics. Conditions for R-C coupling depend too much upon the circuit constants to be useful. At the reduced voltages normally applied to the electrodes with R-C coupling, the a.c. resistance and mutual conductance are usually 20 to 50 per cent. higher and lower respectively than the figures listed.

SMALL TRANSMITTING VALVES

All categories are included in this section (triodes pentodes, beam tetrodes, etc.) having up to 50 watts anode dissipation. The figures given are for Class-C r.f. amplification on telegraphy. It should be noted that in the case of double valves (identified by letters (DT), (DBT), etc., in the "Type" column) the figures for anode, screen and grid currents, dissipation and output refer to the pair.

Regarding the operating frequency column, the figures under "Reduced Rating" can generally be taken to be the maximum frequencies at which the valves will give a useful power output. As the efficiency of a valve decreases at these higher frequencies, it is necessary to make some reduction to the ratings (or power input) in order to ensure that the power dissipated in the valve does not exceed the safe limit. The percentage reduction varies from valve to valve, however, so it is advisable to consult the manufacturer's literature if the reduced ratings are required.

VALVE RECTIFIERS

Included in this section are types which have simultaneous ratings up to 10kV peak inverse and 500mA maximum rectified current. Valves designed for the production of e.h.t. supplies (i.e., over 1kV at less than 30mA or so) will be found in the E.h.t. Rectifier section.

The ratings given are maximum ones and assume a supply frequency of 50 c/s. In some cases a higher current output is permissible if the input voltage is reduced and in nearly all cases the input voltage can be considerably increased and the output current slightly increased if the rectifier is followed by a choke-input filter instead of the usual reservoir capacitor.

The figure for minimum resistance can be reduced if a smaller reservoir capacitor is used. When an input transformer is used, this resistance is usually provided by the resistance and leakage reactance of its windings, but in transformerless circuits sufficient resistance must be provided to limit the peak current.

Figures for the mean unsmoothed-output voltage are not given, since they depend on the current and reservoir capacitance as well as the valve. With no current drain the voltage reaches 1.414 times the r.m.s. input voltage and this figure should be taken for the voltage rating

of the reservoir capacitor. At maximum current the output voltage is approximately equal to the r.m.s. input voltage in the case of rectifiers of 60 mA and upwards current rating.

METAL RECTIFIERS

Copper oxide and selenium rectifiers are both made in basic units of low voltage rating and in various sizes for different currents. Different voltages are catered for by stacking together various numbers of the basic units and there are also different stacking methods for units for use as half-wave, full-wave, voltage-doubler and bridge rectifiers. The total number of rectifier assemblies possible with only a few basic units is thus very large. In order to reduce the numbers, therefore, a few examples are listed as guides and from these the other possible ratings can be deduced.

SEMICONDUCTOR RECTIFIERS

The devices listed here have ratings which exceed 300 PIV and 100mA maximum rectified current and they are thus more suited to power rectification. However, this is not their only use—many are suitable for use in magnetic amplifier circuits etc. Some details of rectifier stacks are included.

E.H.T. RECTIFIERS

Used mainly for the production of the high-tension supplies for cathode-ray tubes, thermionic diodes and metal rectifiers listed here are capable of producing supplies of over 1kV at currents of less than 30mA. Rectifiers capable of producing high-voltage high-current supplies (i.e. for transmitter h.t.) are listed in the Valve Rectifiers section. Three methods of e.h.t.-supply production are recognised in the data. First, the "rectification" of the high-voltage pulse appearing at line-flyback time in a television receiver: here the ratings assume a pulse duration of about $10\mu\text{sec}$. Secondly, the rectification of the output of an r.f. oscillator (100 kc/s and upwards) and, thirdly, by rectification of a low-frequency supply (possibly derived from the mains via a step-up transformer). Characteristics for this last case are marked by relatively large values for the reservoir capacitor.

TELEVISION CATHODE-RAY TUBES

All the tubes in this section are designed for magnetic deflection. It should be noted that the figure given for deflection angle is the number of degrees subtended by the picture diagonal. Although the diagonal of the screen is given as a round number of inches, this should not be taken literally as there are slight variations between tubes.

OSCILLOSCOPE CATHODE-RAY TUBES

Data given under this heading in previous issues of the book have covered a very wide range of c.r.t.s, including radar, instrument, and e.s.-deflection television tubes. Due to this diversity, inadequacies in the presentation occurred. Thus, in this edition, the data given previously have been replaced by a directory of manufacturers of "special" cathode-ray tubes.

EFFICIENCY DIODES

The purpose of these diodes, applied to television line-scan circuits, is to provide a section of the line-scan sawtooth waveform from the energy stored in the deflector coils during the flyback, thereby reducing the amount of anode current required in the line-scan output stage. The thermionic diodes here may also be found under Valve Rectifiers, and from the latter section it will be apparent whether they are single or double diodes. Where only one unit of a double diode can be used as a damping diode, this is made clear by a note.

AMERICAN TYPES

Valves listed as "American" require some explanation. The basic type number of many American valves consists of two figure groups separated by a letter group (for example 6L6). Many of these have a following letter group also to distinguish different physical forms of electrically similar valves. These following letter groups do not appear in the tables; only the basic number is listed.

Among the octal-based types the last letters usually have meanings as follows:—

No letter; metal valve; for example, 6L6.

MG; metal-glass; for example, 6L6MG.

G; glass; for example, 6L6G.

GT; glass, tubular; for example, 6L6GT.

The majority of American-type valves in use and available or manufactured in this country are the G and GT types and should be ordered by appending the appropriate letters to the type number as listed in the tables. For replacement purposes it is important to distinguish between the G and GT types, since the former is much larger physically. Electrically all are usually interchangeable but there are small differences of inter-electrode capacitance which may necessitate re-trimming when types are substituted in r.f. and i.f. circuits.

Many newer types are only available in one form and never have following letters.

Many American-type valves are made in this country and are available under the American Type numbers. These are listed under the names of the British firms concerned.

It may be mentioned also that the American 7- and 14-series valves are listed as having 6.3V and 12.6-V heaters respectively as these are common operating conditions. These valves also have maximum ratings of 7V and 14V, and can be used for car radio where the high maximum rating is adopted to suit the voltage of a battery on charge.

"SPECIAL QUALITY" VALVES

These valves are generally improved versions of existing types, designed for operation under more severe conditions than found in ordinary domestic receivers. The description covers several classes of improvement, such as long life, resistance to mechanical shock, electrical stability and various combinations of these. It also includes the improved valves hitherto known as "reliable" valves. No distinction is made in the tables between these various classes, however. The valves are bracketed with their ordinary equivalents and are indicated by the abbreviation "SQ" alongside.

All rights reserved. These tables are the copyright of Hiffe Books Ltd. and may not be reproduced whole or in part without permission.

GROUPING

The valves are grouped within their sections as *Obsolete*, *Replacement* and *Current Types* and this has been done in accordance with the recommendations of the manufacturers concerned.

These terms are used in the following senses:—

Obsolete: Valves which are no longer manufactured and which are normally unobtainable. The list is obviously incomplete, since it is impracticable to include all valves back to the first ones ever made! The object has been to include only those types which may still be in use in old sets to assist, by giving their characteristics, in the choice of the most suitable replacement. Isolated specimens may, of course, still be obtainable.

Replacement: Valves which are no longer manufactured in large quantities, but of which so many are in use that small batches are still made for replacement purposes. They are normally still obtainable, but may have to be specially ordered and may be subject to temporary delay. They are valves not normally to be recommended for use in new equipment which is to be manufactured in any large quantity.

Current: These valves include the latest types and older ones which are still being produced in quantity. The latter are usually more readily available but may be expected to become replacement types soon.

It should be realised that all the groups really merge into one another from the user's point of view. Particular obsolete valves may be easily obtainable for a time; individual replacement valves and even some current types may be quite hard to get.

INDEX, BASES AND EQUIVALENTS

On account of the large number of devices included—roughly 4,000 British and 1,000 American types—an index is provided to assist in finding them quickly. All items are listed in alphabetic and numerical order of their type numbers in the index (figures precede letters) and against each entry is the page number (or numbers) where it can be found. Also against each valve are its base connections and a list of its "plug-in" equivalents.

Occasionally a valve may be listed, for example, "10ABC see XY99": in these cases, the valves are usually identical and the first number represents an alternative listing. Sometimes a valve listed by a manufacturer as "obsolete" may not be found under that manufacturer's name, provided that it appears elsewhere.

The information which appears under manufacturers' names has been supplied by the individual valve manufacturers and collected into its present form by the staff of *Wireless World*. The data on American types has been collected from many sources, but notably from data lists provided by the Radio Corporation of America.

Blanks in the columns indicate that the figures missing have been found to be unobtainable. Every effort has been made to secure accuracy, and proofs for the "named" sections have been passed by the manufacturers concerned. There are over 50,000 sets of figures in the tables, apart from the base connections, of which there are some 600 distributed among 33 bases. It is hoped that there are no errors: should any be found, *Wireless World* would be pleased to receive details.

FREQUENCY-CHANGERS

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base					
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				c_{gk}	c_{ak}	c_{pn}	Type	Ref.				
BRIMAR																			
<i>Obsolete Types</i>																			
1A7	(H)	mix	1.4*	0.05	90	45	0	0.6	0.7	0.6	0.25	7.0	7.0	10.0	0.5	IO	76		
		osc			90			1.2					3.4	4.4	0.9				
1LA6	(H)	mix	1.4*	0.05	90	45	0	0.55	0.6	0.75	0.25	7.0	7.7	8.0	0.4	B8B	29		
		osc			90			1.2					2.9	3.3	0.6				
15A2	(H)	mix	4.0	0.65	250	100	-3.0	3.5	2.7	0.36	0.55	20.0	7.5	9.5	0.2	B7	2		
		osc			170			4.0											
20A1	(TH ₂)	mix	4.0	1.2	250	80	-1.5	2.2	3.0	0.7	0.65	12.5	7.0	21.0	0.05	B7	3		
		osc			100			2.3											
6A7	(H)	mix	6.3	0.3	250	100	-3.0	3.5	2.7	0.36	0.55	20.0	9.5	12.0	0.26	UX7	1		
6A8		osc			170			4.0						6.0	4.6		1.1	IO	1
6F7		mix			250	100	-3.0	2.8	0.6	2.0	0.3	7.0		3.2	12.5		0.008	UX7	13
		osc			100			2.4				2.5	3.0	2.0					
6K8	(TH ₂)	mix	6.3	0.3	250	100	-3.0	2.5	6.0	0.6	0.36	7.5	4.6	4.8	0.08	IO	4		
		osc			100			3.8					6.5	3.4	1.8				
12K8	(TH ₂)		12.6	0.15	Other data as Type 6K8														
15D1	(H)		13.0	0.2	Other data as Type 15A2														
15D2	(H)		13.0	0.15	Other data as Type 15A2														
20D2	(TH ₂)	mix	13.0	0.15	250	100	-3.0	2.5	6.0	0.6	0.36	7.5	4.5	5.0	0.03	B7	3		
		osc			100			3.8											
<i>Replacement Types</i>																			
1AC6	(H)		1.4*	0.05	85	60	0	0.7	0.15	0.65	0.325	3.1	7.5	8.5	0.4	B7G	54		
DK96/1AB6	(H)	mix	1.4*	0.025	85	68	0	0.6	0.14	0.8	0.3	6.0	7.4	8.1	0.36	B7G	54		
		osc																	
1R5	(H)		1.4*	0.05	90	45	0	0.8	1.9	0.8	0.25	15.0	7.0	7.0	0.4	B7G	3		
7S7	(TH)	mix	6.3	0.3	250	100	-2.0	1.8	3.0	1.25	0.53	20.0	5.0	8.0	0.03	B8B	8		
		osc			150			5.0					7.0	3.5	1.0				
12AH8	(TH)	mix	6.3	0.3†	250	100	-3.0	2.6	4.4	1.5	0.55	9.4	5.0	8.0	0.025	B9A	9		
		osc			100			5.7					7.0	2.5	1.2				
20D4	(TH)	mix	6.3	0.3	250	100	-2.0	3.0	3.6	0.9	0.850	12.5	4.5	8.2	0.034	B9A	52		
		osc			100			5.0					2.1	0.87					
ECH42	(TH ₂)	mix	6.3	0.23	250	85	-2.0	3.0	3.0	1.0	0.75	9.4	4.0	9.2	0.1	B8A	3		
		osc			115			4.8					5.5	2.3	1.2				
14S7	(TH)		12.6	0.15	Other data as Type 7S7														
UCH42	(TH ₂)	mix	14.0	0.1	200	85	-2.0	3.0	3.0	1.0	0.75	9.4	3.8	9.2	0.1	B8A	3		
		osc			100			3.1					5.5	2.3	1.2				
<i>Current Types</i>																			
6BE6	(H)		6.3	0.3	250	100	-1.5	3.0	7.1	1.0	0.475	10.0	7.2	8.6	0.3	B7G	29		
5750 (SQ)																			
ECF80	(TP)	mix	6.3	0.43	250	180	-5.8	5.7	1.4	1.5	2.1	5.0	5.2	3.8	0.025	B9A	25		
		osc			100		-2.0	14.0					2.5	1.8	1.5				
ECF82/6U8	(TP)	mix	6.3	0.45	170	170		6.6	2.5	0.4	1.65	5.0	5.0	3.5	0.006	B9A	25		
		osc			100			7.0					2.5	1.0	1.8				
PCF86	(TP)	mix	7.2	0.3	190	140	-1.5	8.5	2.7	0.35	4.5	3.2	6.0	3.6	0.025	B9A	64		
		osc			100		-3.0	14.0					2.5		2.3				
PCF80	(TP)	mix	9.0	0.3	170	170	-5.5	5.2	1.5	0.87	2.1	5.0	5.5	3.8	0.025	B9A	25		
		osc			100		-2.0	14.0					2.3	0.3	1.5				
PCF82/9U8	(TP)		9.5	0.3	Other data as Type ECF82/6U8														
12AD6	(H)		12.6	0.15	12.6	12.6	0	0.45	1.5	1.0	0.26	2.2	8.0	8.0	0.3	B7G	29		
12BE6	(H)		12.6	0.15	Other data as Type 6BE6														
COSSOR																			
<i>Obsolete Types</i>																			
210SPG	(H)	mix	2.0*	0.1	150	40	0	0.4	0.8		0.45	7.0	14.0	21.5		B7	1		
		osc			150			1.1											
41MPG	(H)	mix	4.0	1.0	250	100	-1.5	2.5	3.0		1.5	14.0	15.5	22.5		B7	2		
		osc			100			3.0											
13PGA	(H)	mix	13.0	0.2	250	100	-3.0	3.5	2.2		0.75	12.0	8.0	9.5		B7	2		
		osc			200			4.0											
202MPG	(H)	mix	20.0	0.2	200	100	-1.5	2.5	3.0		1.5	14.0	15.5	22.5		B7	2		
		osc			100			3.0											
203THA	(TH ₂)		20.0	0.3	Other data as Type 4THA														
<i>Replacement Types</i>																			
1A7	(H)	mix	1.4*	0.05	90	45	0	0.6	0.7	0.6	0.25		7.0	10.0	0.5	IO	76		
		osc			90			1.2					3.4	4.4	0.9				
210PG	(H)	mix	2.0*	0.1	150	40	0	0.4	0.8		0.45	7.0	14.0	21.5		B7	1		
		osc			150			1.1											
220TH	(TH)	mix	2.0*	0.2	120	60	0	0.6	1.7		0.25	7.0	6.5	23.0	0.04	B7	34		
		osc			100			1.7											
4THA	(TH ₂)	mix	4.0	1.5	250	100	-2.0	3.5	5.5		0.85	10.0	8.0	14.0	0.001	B7	3		
		osc			100			1.5											

Frequency-changers

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				c_{gt}	c_{ak}	c_{gn}	Type	Ref.	
COSSOR (Continued)																
<i>Replacement Types (Continued)</i>																
41STH (TH ₂)	mix	4.0	1.15	250	100	-1.5	3.0	4.0	—	0.6	12.0	6.5	14.5	0.001	B7	3
	osc			100			2.0									
OM10 (TH ₂)	mix	6.3	0.2	250	100	-2.0	2.7	3.8	0.6	0.7	11.0	5.0	11.9	0.002	10	3
	osc			70			3.0					5.9				
202STH (TH ₂)	mix	20.0	0.2	250	100	-1.5	3.0	4.0	—	0.6	12.0	6.5	14.5	0.001	B7	3
	osc			100			2.0									
302THA (TH ₂)		30.0	0.2													
Other data as Type 4THA																
<i>Current Types</i>																
DK91 (H)	mix	1.4*	0.05	90	45	0	0.8	1.9	0.8	0.25	15.0	7.0	7.5	0.4	B7G	3
DK92/1AC6 (H)	mix	1.4*	0.05	85	60	0	0.7	0.15	0.65	0.325	6.0	7.5	8.5	0.4	B7G	54
	osc															
DK96 (H)	mix	1.4*	0.025	85	68	0	0.6	0.14	0.8	0.3	6.0	7.6	8.4	0.36	B7G	54
	osc															
7S7 (TH)	mix	6.3	0.3	250	100	-2.0	1.8	3.0	1.25	0.525	20.0	5.0	8.0	0.03	B8B	8
	osc			150			5.0									
ECF80 (TP)	mix	6.3	0.43	170	170	-5.5	5.2	1.5	0.87	2.1	5.0	5.2	3.8	0.025	B9A	25
	osc			100		-2.0	14.0					2.3	0.3	1.5		
ECH42/62TH (TH ₂)	mix	6.3	0.23	250	85	-2.0	3.2	3.75	1.0	0.71	11.0	4.0	9.2	0.1	B8A	3
	osc			115			4.2					5.5	2.3	1.2		
ECH81 (TH)	mix	6.3	0.3	250	103	-2.0	3.25	6.7	1.0	0.775	—	4.8	7.9	0.006	B9A	24
	osc			100			13.5					2.6	2.1	1.0		
PCF80/8A8 (TP)	mix	9.0	0.3	170	170	-5.5	5.2	1.5	0.87	2.1	5.0	5.5	3.8	0.025	B9A	25
	osc			100		-2.0	14.0					2.3	0.3	1.5		
PCF82 (TP)	mix	9.5	0.3	170	170	—	6.6	2.5	0.4	1.65	5.0	5.0	2.6	0.01	B9A	25
	osc			100			7.0					2.5	0.4	1.8		
14S7 (TH)	mix	12.6	0.15													
UCH42/141TH (TH ₂)	mix	14.0	0.1	200	85	-2.0	3.2	3.35	1.25	0.69	13.0	4.0	9.2	0.1	B8A	3
	osc			110			4.2					5.5	2.3	1.2		
UCH81 (TH)	mix	19.0	0.1	200	120	-2.6	3.7	8.1	1.0	0.78	—	4.8	7.9	0.006	B9A	24
	osc			100		0	13.5					2.6	2.1	1.0		

EDISWAN MAZDA

<i>Obsolete Types</i>																
FC141 (H)	mix	1.4*	0.05	82	45	0	0.55	0.6	0.6	0.25	—	—	—	—	MO	5
	osc			75			1.2									
TP22 (TP)	mix	2.0*	0.25	150	60	-1.5	1.2	0.4	1.6	0.5	3.0	9.25	10.0	0.03	B9	1
	osc			100			0.8					4.5	6.5	4.5		
TP23 (TP)	mix	2.0*	0.25	120	60	-1.5	0.55	-0.95	1.6	0.25	8.0	9.25	12.25	0.02	B7	34
	osc			80			2.5					13.75	8.75	4.5		
TP25 (TP)	mix	2.0*	0.2	120	60	-1.5	0.58	0.92	1.3	0.26	8.0	6.5	8.0	0.01	MO	23
	osc			80			2.5					9.0	3.75	2.0		
TP26 (TP)	mix	2.0*	0.2	103	65	-2.0	1.2	0.3	1.4	0.55	3.0	6.75	8.25	0.02	MO	22
	osc			65			0.9					3.75	4.25	2.0		
AC/TH1 (TH)	mix	4.0	1.3	250	100	-3.0	3.0	6.0	1.6	0.75	9.0	9.5	11.5	0.0015	B7	3
	osc			80			4.5					10.25	4.0	2.25		
AC/TH1A (TH)	mix	4.0	1.3	250	100	-3.0	3.0	6.0	1.6	0.75	9.0	9.25	11.5	0.001	MO	12
	osc			80			4.5					10.5	4.0	2.25		
AC/TP (TP)	mix	4.0	1.25	250	200	-5.0	6.5	2.5	0.9	0.7	3.0	8.0	7.75	0.07	B9	2
	osc			150			1.5					5.25	4.25	2.5		
6C31 (TH)	mix	6.3	0.85	250	100	-3.0	3.0	6.05	1.6	0.75	9.0	9.5	13.0	0.001	10	3
	osc			80			5.0					11.5	4.4	3.0		
TP1340 (TP)	mix	13.0	0.4	250	200	-5.0	6.5	2.5	0.9	0.7	3.0	8.0	7.75	0.07	B9	2
	osc			150			1.5					5.25	4.25	2.5		
TH232 (TH)	mix	23.0	0.2	150	100	-3.0	3.0	6.0	1.0	0.65	9.0	9.5	11.5	0.0015	B7	3
	osc			80			4.5					10.25	4.0	2.25		
TH233 (TH)	mix	23.0	0.2	175	100	-3.0	2.6	5.6	1.3	0.64	8.0	9.25	11.25	0.0005	MO	12
	osc			80			4.5					10.5	3.5	2.4		
TH2320 (TH)	mix	23.0	0.2	150	100	-3.0	3.0	6.0	1.2	0.75	9.0	9.5	11.5	0.0015	B7	3
	osc			80			4.5					10.25	4.0	2.25		
TP2620 (TP)	mix	26.0	0.2	250	200	-5.0	6.5	2.5	0.9	0.7	3.0	8.0	7.75	0.07	B9	2
	osc			150			1.5					5.25	4.25	2.5		
<i>Replacement Types</i>																
1C1 } (H)	mix	1.4*	0.05	90	67.5	0	1.6	3.2	0.6	0.3	37.0	7.0	7.5	0.4	B7G	3
1R5 } (TH)	mix	4.0	1.3	250	100	-3.0	3.0	6.05	1.6	0.75	9.0	9.25	11.0	0.001	MO	12
TH41 } (TH)	osc			80			5.0					10.5	3.75	2.4		
6C9 (TH)	mix	6.3	0.45	250	100	-2.5	3.0	6.0	3.0	0.65	9.0	8.3	3.0	0.003	B8A	3
	osc			80			5.0					7.7	1.7	1.8		
6C10 (TH ₂)	mix	6.3	0.225	250	100	-2.5	3.6	3.75	1.03	0.71	17.0	4.0	9.2	0.05	B8A	3
	osc			115			5.0					6.4	2.7	1.5		

(Continued)

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_c (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base			
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				c_{pK}	c_{cK}	c_{pA}	Type	Ref.		
EDISWAN MAZDA (Continued)																	
<i>Replacement Types (Continued)</i>																	
10C1	(TH)	mix osc	28.0	0.1	175 80	100	-2.5	3.0 5.0	6.0	2.2	0.65	9.0	8.3 7.7	3.0 1.7	0.003 1.8	B8A	3
10C2	(TP)	mix osc	28.0	0.1	150 80	150	0	4.7 5.0	1.3	—	2.1	3.25	7.5 4.1	2.6 1.6	0.012 1.7	B8A	19
<i>Current Types</i>																	
1C2	(H)	mix osc	1.4*	0.05	85 30	60	0	0.7 1.6	0.15	0.65	0.325	5.7	7.5 4.0	8.5 5.0	0.4	B7G	54
1C3	(H)	mix osc	1.4*	0.025	85 35	68	0	0.6 1.5	0.14	0.8	0.3	5.7	7.4 3.9	8.1 4.8	0.36	B7G	54
6C12	(TH)	mix osc	6.3	0.3	250 100	103	-2.0	3.25 4.5	6.7	1.0	0.775	12.0	4.8 2.6	7.9 2.1	0.006 1.0	B9A	24
6H1	(H _z)	—	6.3	0.2	250	100	-2.2	2.3	2.7	1.0	0.56	12.0	4.3	9.25	0.06	B7G	76
30C17 (T,VMP)	—	mix osc	7.4	0.3	170 100	155	—	6.4 5.0	2.0	0.4	4.9	3.0	6.6 3.5	3.1 2.6	0.008 1.8	B9A	42
30C1	(TP)	mix osc	9.0	0.3	170 120	145	—	6.8 6.0	2.0	0.8	2.0	5.0	6.1 3.1	4.9 2.9	0.013 1.7	B9A	25
30C15	(TP)	mix osc	9.0	0.3	164 120	138	—	7.6 6.0	2.3	0.6	3.3	3.7	6.7 3.2	5.0 3.2	0.014 1.6	B9A	42
10C14	(TH)	mix osc	19.0	0.1	200 100	119	-2.6	3.7 4.5	8.1	1.0	0.78	14.0	4.8 2.6	7.9 2.1	0.006 1.0	B9A	24
EMITRON																	
<i>Current Types</i>																	
6BE6	(H)	—	6.3	0.3	250	100	-1.5	3.0	7.1	1.0	0.475	10.0	7.2	8.6	0.3	B7G	29
7S7	(TH)	mix osc	6.3	0.3	250 150	100	-2.0	1.8 5.0	3.0	1.25	0.525	20.0	5.0	8.0	0.03	B8B	8
14S7	(TH)	mix	12.6	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—
Other data as Type 7S7																	
FERRANTI																	
<i>Obsolete Types</i>																	
VHTA	(H)	mix osc	13.0	0.2	250 100	100	-1.5	3.2 1.3	5.6	0.5	0.65	15.0	15.0	16.0	0.3	B7	2
VHTS	(H)	mix osc	13.0	3.0	200 100	100	-3.0	2.6 1.2	5.1	0.5	0.65	15.0	15.0	16.0	0.3	B7	2
<i>Replacement Types</i>																	
IAC6/ DK92	(H)	—	1.4*	0.05	85	60	0	0.7	0.15	0.65	0.325	6.0	7.5	8.5	0.4	B7G	54
1R5/DK91	(H)	—	1.4*	0.05	90	45	0	0.8	1.9	0.8	0.25	15.0	7.0	7.0	0.4	B7G	3
VHT2A	(H)	mix osc	2.0*	0.1	120 120	45	0	— —	1.9	0.75	0.35	10.0	11.5 6.0	7.0 5.0	0.3 4.0	B7	1
VHT4	(H)	mix osc	4.0	1.0	250 100	100	-3.0	2.6 1.2	5.1	0.5	0.7	15.0	15.0 11.0	16.0 9.0	0.3 5.0	B7	2
6A7	(H)	mix	6.3	0.3	250	100	-3.0	3.5	2.7	0.36	0.55	20.0	12.0	12.0	0.06	{ UX7 IO IO	1 1 4
6A8		osc	—	—	100	—	—	4.0	—	—	—	—	6.5	5.0	0.8		
6K8		(TH _z)	mix osc	6.3	0.3	250 100	100	-3.0	2.5 3.8	6.0	0.6	0.35	7.5	4.6 6.5	4.8 3.4		
6SA7 6SA7GT/G	(H)	—	6.3	0.3	250	100	-2.0	3.5	8.5	1.0	0.45	—	9.5	12.0	0.13	{ IO IO	6 7
7S7		(TH)	mix osc	6.3	0.3	250 150	100	-2.0	1.8 5.0	3.0	1.25	0.525	20.0	5.0	8.0		
12K8	—	—	12.6	0.15	—	—	—	—	—	—	—	—	—	—	—	IO	4
Other data as Type 6K8																	
<i>Current Types</i>																	
IAB6/ DK96	(H)	—	1.4*	0.025	85	64	0	0.6	1.5	1.0	0.3	6.0	7.6	8.4	0.36	B7G	54
6BE6/EK90	(H)	—	6.3	0.3	250	100	-1.5	3.0	7.1	1.0	0.475	10.0	7.2	8.6	0.3	B7G	29
ECH42/ 6CU7	(TH _z)	mix	6.3	0.23	250	85	-2.0	3.0	3.0	1.0	0.75	11.0	4.0	9.2	0.1	B8A	3
ECH81/ 6A18		osc	—	—	115	—	—	4.8	—	—	—	—	5.5	2.3	1.2	—	—
9A3/ PCF80	(TP)	mix	6.3	0.3	250	100	-2.0	3.2	6.7	1.0	0.775	13.0	4.8	7.9	0.006	B9A	24
9U8/ PCF82		osc	—	—	100	—	—	4.5	—	—	—	—	2.6	2.1	1.0	—	—
UCH81	(TH)	mix osc	9.0	0.3	170 100	170	—	6.3 14.0	2.5	0.7	2.05	4.0	5.5 2.5	3.8 1.8	0.02 1.5	B9A	25
9U8/ PCF82	(TP)	mix	9.5	0.3	250	110	—	5.2	2.0	0.4	1.0	5.0	5.0	2.5	0.006	B9A	25
UCH81		osc	—	—	170	—	—	3.3	—	—	—	—	2.5	0.4	1.8	—	—
UCH81	(TH)	mix osc	19.0	0.1	200 100	120	-2.6	3.7 4.5	8.1	1.0	0.78	—	4.8 2.6	7.9 2.1	0.006 1.0	B9A	24

Frequency-changers

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_c (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base					
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				C_{gk}	C_{ak}	C_{ga}	Type	Ref.				
G.E.C.																			
<i>Obsolete Types</i>																			
X14	mix	1.4	0.05	90	45	0	0.45	0.6	—	0.25	10.0	7.0	7.6	0.47	IO	76			
	osc			90	—	—	—	—	—	—	—	5.1	5.4	1.25	B7	1			
X41	(TH ₂) mix	4.0	1.2	250	80	-1.5	2.3	8.8	—	0.64	12.0	7.2	17.0	0.46	B7	3			
	osc			150	—	—	2.2	—	—	—	—	15.5	6.0	—	—	—			
MX40	(H) mix	4.0	1.0	250	80	-3.0	—	—	—	0.5	10.0	13.3	—	0.3	B7	2			
	osc			150	—	—	—	—	—	—	—	11.3	9.4	2.6	—	—			
X61M	(TH ₂) mix	6.3	0.3	250	100	-3.0	3.0	3.0	0.7	0.62	15.0	4.9	11.5	—	IO	3			
	osc			100	—	—	3.3	—	—	—	—	10.5	6.0	—	—	—			
X76M	(TH ₂) mix	13.0	0.16	150	100	-3.0	3.0	3.0	0.7	0.62	15.0	4.7	13.1	—	IO	3			
	osc			100	—	—	3.3	—	—	—	—	10.6	6.3	—	—	—			
<i>Replacement Types</i>																			
DK91/X17	(H) mix	1.4*	0.05	90	67.5	0	—	—	0.75	0.25	—	7.0	7.0	0.4	B7G	3			
	osc			—	—	—	—	—	—	—	—	3.8	—	0.1	—	—			
X14	(H) mix	1.4*	0.05	90	45	0	0.45	0.6	—	0.25	10.0	7.0	7.6	0.47	IO	76			
	osc			90	—	—	—	—	—	—	—	5.1	5.4	1.25	—	—			
X22	(H) mix	2.0*	0.15	150	70	0	—	—	—	0.35	10.0	13.8	20.5	0.4	B7	1			
	osc			150	—	—	—	—	—	—	—	7.8	6.4	1.47	—	—			
X24	(TH ₂) mix	2.0*	0.2	150	60	-1.5	0.7	1.7	—	0.25	6.0	7.5	17.5	—	B7	3			
	osc			100	—	—	2.1	—	—	—	—	19.0	9.5	—	—	—			
ECF80	(TP) mix	6.3	0.43	250	180	-5.8	5.7	1.4	1.5	2.1	5.0	2.2	3.8	0.025	B9A	25			
	osc			100	—	-2.0	14.0	—	—	—	—	2.5	1.8	1.5	—	—			
EK90/X727	(H) mix	6.3	0.3	250	100	-1.5	3.0	7.1	1.0	0.475	10.0	7.2	8.6	0.3	B7G	29			
X61M	(TH ₂) mix	6.3	0.3	250	100	-3.0	3.0	3.0	0.7	0.62	15.0	4.9	11.5	—	IO	3			
	osc			100	—	—	3.3	—	—	—	—	10.5	6.0	—	—	—			
X63	(H) mix	6.3	0.3	250	100	-3.0	—	—	—	0.49	25.0	8.0	8.9	0.38	IO	1			
	osc			100	—	—	—	—	—	—	—	7.3	5.9	0.83	—	—			
X79	(TH ₂) mix	6.3	0.3	250	75	0	4.5	3.4	0.7	0.78	10.0	4.1	4.34	0.08	B9A	21			
	osc			100	—	—	4.5	—	—	—	—	5.47	1.5	1.48	—	—			
X65	(TH ₂) mix	6.3	0.3	250	100	-3.0	3.0	3.0	2.5	0.23	10.0	3.5	5.5	0.12	IO	3			
	osc			100	—	—	3.3	—	—	—	—	9.6	5.5	2.0	—	—			
X78	(TH ₂) mix	6.3	0.3	250	75	0	4.5	3.4	0.7	0.78	10.0	4.1	4.34	0.11	B7G	48			
	osc			100	—	—	4.5	—	—	—	—	—	—	—	—	—			
X81	(TH ₂) mix	6.3	0.3	250	100	-2.0	3.0	2.4	1.0	0.65	10.0	6.0	11.5	0.07	B8B	8			
	osc			100	—	—	3.6	—	—	—	—	9.6	4.8	1.15	—	—			
PCF80	(TP) mix	9.0	0.3	170	170	-2.0	10.0	10.0	—	2.18	4.0	4.5	4.0	0.02	B9A	25			
	osc			100	—	-2.0	14.0	—	—	—	—	3.0	0.5	2.0	—	—			
PCF82	(TP) mix	9.5	0.3	250	110	—	5.2	2.0	0.4	1.0	5.0	5.0	2.5	0.006	B9A	25			
	osc			170	—	—	3.3	—	—	—	—	2.5	0.4	1.8	—	—			
X101	(TH ₂) mix	19.0	0.1	Other data as Type X81										10.0	4.1	4.34	0.11	B9A	21
X109	(TH ₂) mix	19.0	0.1	175	75	0	4.3	3.6	0.25	0.71	—	—	—	—	—	—			
	osc			100	—	—	4.5	—	—	—	—	—	—	—	—	—			
<i>Current Types</i>																			
DK92/X20	(H) mix	1.4	0.05	85	60	0	0.7	0.15	0.65	0.39	7.0	7.5	8.5	0.4	B7G	54			
	osc			30	—	—	1.6	—	—	—	—	—	—	—	—	—			
DK96/X25	(H) mix	1.4	0.025	85	68	0	0.6	0.14	0.08	0.3	5.7	7.4	8.1	0.36	B7G	54			
	osc			35	—	—	1.5	—	—	—	—	3.9	4.8	—	—	—			
X18	(H) mix	1.4*	0.05	90	67.5	0	1.15	2.85	0.6	0.32	15.0	7.0	7.0	0.4	B7G	54			
ECH81/ X719	(TH) mix	6.3	0.3	250	100	-2.0	6.5	3.8	—	0.775	13.0	4.8	7.9	0.006	B9A	24			
	osc			100	—	0	13.5	—	—	—	—	2.6	2.1	1.0	—	—			
LZ329	(TP) mix	9.0	0.3	170	170	-2.8	6.5	2.0	0.8	2.2	5.0	5.5	3.8	0.025	B9A	25			
	osc			100	—	—	10.0	—	—	—	—	2.3	0.3	1.5	—	—			
UCH81/ X119	(TH) mix	19.0	0.1	200	120	2.6	3.7	8.1	1.0	0.78	—	4.8	7.9	0.006	B9A	24			
	osc			100	—	0	13.5	—	—	—	—	2.6	2.1	1.0	—	—			
X118	(TH) mix	28.0	0.1	175	100	-2.5	3.0	6.0	2.2	0.65	9.0	8.3	3.0	0.003	B8A	3			
	osc			80	—	—	5.0	—	—	—	—	7.7	1.8	—	—	—			

MARCONI

Obsolete Types

X14	(H) mix	1.4*	0.05	90	45	0	0.45	0.6	—	0.25	10.0	7.0	7.6	0.47	IO	76
	osc			90	—	—	—	—	—	—	—	5.1	5.4	1.25	—	—
X21	(H) mix	2.0*	0.1	150	70	0	—	—	—	0.24	10.0	11.8	19.2	0.55	B7	1
	osc			150	—	—	—	—	—	—	—	7.4	—	1.8	—	—
X23	(TH ₂) mix	2.0*	0.3	150	60	-1.5	0.7	—	—	0.25	6.0	6.3	17.5	0.05	B7	34
	osc			150	—	—	2.1	—	—	—	—	21.5	9.8	4.1	—	—
X24	(TH ₂) mix	2.0*	0.2	150	60	-1.5	0.7	1.7	—	0.25	6.0	7.5	17.5	—	B7	3
	osc			100	—	—	2.1	—	—	—	—	19.0	9.5	—	—	—

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_c (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base			
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				C_{gk}	C_{ak}	C_{pa}	Type	Ref.		
MARCONI (Continued)																	
<i>Obsolete Types (Continued)</i>																	
X42	(H)	mix	4.0	0.6	250	100	-3.0	—	—	—	0.49	25.0	8.6	—	0.95	B7	2
		osc			200	—	—	—	—	—	—	—	8.7	7.0	1.64		
X64	(H)	mix	6.3	0.3	250	150	-6.0	—	—	—	0.31	18.0	11.3	8.5	1.0	IO	2
		osc			—	—	—	—	—	—	—	—	6.0	—	—		
X30	(H)	mix	13.0	0.3	250	100	-3.0	4.0	—	—	0.75	10.0	15.6	—	0.36	B7	2
X32		osc			150	—	—	3.0	—	—	—	—	—	—	12.2	9.5	2.66
X31	(TH ₂)	mix	13.0	0.3	250	80	-1.5	—	—	—	0.55	12.0	7.0	21.5	0.046	B7	3
		osc			150	—	—	—	—	—	—	—	17.0	8.5	3.56		
X71M	(TH ₂)	mix	13.0	0.16	250	100	-3.0	—	—	—	0.62	15.0	5.0	14.1	0.085	IO	3
		osc			100	—	—	—	—	—	—	—	11.0	7.1	2.3		
X101	(TH ₂)	mix	19.0	0.1	—	—	—	—	—	—	—	—	—	—	—	—	—
Other data as Type X81																	
<i>Replacement Types</i>																	
X22	(H)	mix	2.0*	0.15	150	70	0	—	—	—	0.35	10.0	13.8	20.5	0.4	B7	1
		osc			150	—	—	—	—	—	—	—	7.8	6.4	1.47		
MX40	(H)	mix	4.0	0.65	250	90	-1.5	1.6	2.0	—	0.6	10.0	13.3	—	0.3	B7	2
		osc			150	—	—	—	—	—	—	—	11.3	9.4	2.6		
X41Met	(TH ₂)	mix	4.0	1.2	250	70	-1.5	2.3	2.8	—	0.64	12.0	7.2	17.0	0.46	B7	3
		osc			150	—	—	2.2	—	—	—	—	15.5	6.0	—		
X61M	(TH ₂)	mix	6.3	0.3	250	100	-3.0	2.0	3.0	—	0.62	15.0	4.9	11.5	—	IO	3
		osc			100	—	—	5.0	—	—	—	—	10.5	6.0	—		
X63	(H)	mix	6.3	0.3	250	100	-3.0	5.0	2.7	0.3	0.49	25.0	8.0	8.9	0.38	IO	1
		osc			100	—	—	—	—	—	—	—	7.3	5.9	0.83		
X65	(TH ₂)	mix	6.3	0.3	250	100	-3.0	1.75	—	2.5	0.225	10.0	3.5	5.5	0.21	IO	3
		osc			100	—	—	4.75	—	—	—	—	10.4	5.5	2.0		
<i>Current Types</i>																	
DK91/X17	(H)	mix	1.4*	0.05	90	67.5	0	1.6	3.2	0.6	0.3	—	7.0	7.0	0.4	B7G	3
		osc			—	—	—	—	—	—	—	—	3.8	—	—		
DK92/X18	(H)	mix	1.4*	0.05	85	60	0	0.7	1.6	0.65	0.325	15.0	7.0	7.0	0.4	B7G	54
DK96	(H)	mix	1.4	0.25	85	6.8	0	0.6	0.14	0.8	0.3	5.6	7.4	8.1	0.36	B7G	54
ECH21/	(TH)	mix	6.3	0.33	250	100	-2.0	3.0	6.2	1.4	0.75	10.0	6.8	9.5	0.002	B8B	42
X143		osc			100	—	—	12.0	—	—	—	—	4.5	3.5	1.1		
ECH35/	(TH ₂)	mix	6.3	0.225	250	100	-2.0	3.0	3.0	1.3	0.65	11.0	5.0	10.0	0.003	IO	3
X147		osc			100	—	—	3.3	—	—	—	—	9.0	3.0	1.6	B10	
ECH42/	(TH ₂)	mix	6.3	0.225	250	85	-2.0	3.0	3.0	1.0	0.75	10.0	4.0	9.2	0.05	B8A	3
X150		osc			100	—	—	10.0	—	—	—	—	—	—	—		
ECH81/	(TH)	mix	6.3	0.3	250	100	-2.0	3.25	6.7	0.7	0.775	13.0	4.8	7.9	0.006	B9A	24
X719		osc			100	—	—	13.5	—	—	—	—	2.6	2.1	1.0		
X78	(TH ₂)	mix	6.3	0.3	250	75	0	4.5	3.4	0.7	0.78	10.0	4.1	4.34	0.11	B7G	48
		osc			100	—	—	10.0	—	—	—	—	2.8	—	—		
X79	(TH ₂)	mix	6.3	0.3	250	75	0	4.5	3.4	0.7	0.78	10.0	4.1	4.34	0.08	B9A	21
		osc			100	—	—	10.0	—	—	—	—	5.47	1.5	1.48		
X148/7S7	(TH)	mix	6.3	0.3	250	100	-2.0	1.5	3.0	1.25	2.0	—	5.0	8.0	0.03	B8B	8
		osc			250	—	—	5.0	—	—	—	—	—	—	—		
X727/6BE6	(H)	mix	6.3	0.3	250	100	-1.5	3.0	7.1	1.0	0.475	10.0	7.2	8.6	0.3	B7G	29
PCF80/	(TP)	mix	9.0	0.3	170	170	-5.5	5.2	1.5	0.7	2.1	4.0	4.5	4.0	0.02	B9A	25
LZ319		osc			100	—	—	14.0	—	—	—	—	3.0	0.05	2.0		
X76M	(TH ₂)	mix	13.0	0.16	175	70	-3.0	4.0	3.5	0.1	0.62	15.0	4.7	13.1	—	IO	3
		osc			100	—	—	3.5	—	—	—	—	10.6	6.3	—		
UCH42/	(TH ₂)	mix	14.0	0.1	200	85	-2.0	3.0	3.0	1.25	0.75	13.0	4.0	9.2	0.05	B8A	3
X142		osc			100	—	—	10.0	—	—	—	—	6.4	2.7	1.5		
UCH81	(TH)	mix	19.0	0.1	200	119	-2.6	3.7	8.1	1.0	0.775	—	4.8	7.9	0.006	B9A	24
		osc			100	—	—	13.5	—	—	—	—	2.6	2.1	1.0		
X109	(TH ₂)	mix	19.0	0.1	175	75	0	4.3	3.6	0.25	0.71	10.0	4.1	4.34	0.11	B9A	21
		osc			100	—	—	10.0	—	—	—	—	2.8	—	—		
X145	(TH)	mix	28.0	0.1	175	100	-2.5	3.0	6.0	2.2	0.65	9.0	8.3	3.0	0.003	B8A	3
		osc			175	—	—	5.0	—	—	—	—	7.7	1.7	1.8		

MULLARD

Obsolete Types

1A7	(H)	mix	1.4*	0.05	90	45	0	0.6	0.7	0.06	0.25	7.0	7.0	10.0	0.5	IO	76
DK1	(H)	mix	1.4*	0.05	90	45	0	0.55	0.6	0.06	0.25	—	—	—	—	C18	31
		osc			90	—	—	1.2	—	—	—	—	—	—	—		
FC2	(O)	mix	2.0*	0.1	135	70	0	0.95	3.75	—	0.2	13.0	9.9	14.5	0.057	B7	1
		osc			135	—	—	—	—	—	—	—	—	—	—		
FC2A	(O)	mix	2.0*	0.13	135	45	0	0.07	0.7	2.5	0.27	12.0	9.0	11.0	0.07	B7	1
KK32		osc			135	—	—	2.1	—	—	—	—	—	—	6.3	8.5	—
KCF30	(TP)	mix	2.0*	0.2	120	60	-1.5	0.8	0.92	1.6	0.26	8.0	6.5	8.0	0.01	IO	98
		osc			100	—	—	—	—	—	—	—	9.0	4.0	2.0		

(Continued)

Frequency changers

Type	Heater		Volts			Current (mA)		r _{re} (MΩ)	g _c (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base				
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				C _{gk}	C _{ob}	C _{gs}	Type	Ref.			
MULLARD (Continued)																		
<i>Obsolete Types (Continued)</i>																		
TH2	(TH ₂)	mix	2.0°	0.23	135	60	-1.5	0.95	1.6	0.6	0.43	7.0	8.5	15.0	0.002	B7	34	
		osc			100			4.0					21.0	1.4	7.7			
TH4A	(TH ₂)	mix	4.0	1.5	275	100	-2.5	3.25	7.0	1.5	0.75	11.0	8.0	13.0		B7	3	
		osc			100			22.0					16.5	3.1	3.25			
TH4B	(TH)	mix	4.0	1.45	250	100	-2.5	3.25	6.0	1.5	0.75	11.0	8.4	13.8	0.16	B7	3	
		osc			100			9.5					13.6	3.5				
6A7	(H)	mix	6.3	0.3	250	100	-3.0	3.5	2.7	0.36	0.55	20.0	9.5	12.0	0.26	UX7	1	
		osc			100			4.0					6.0	4.6	0.8			
ECH2	(TH)	mix	6.3	0.95	250	100	-2.5	3.25	6.0	1.5	0.75	11.0	8.4	13.8	0.015	Ct8	1	
		osc			100			9.5					17.0	3.5	3.5			
ECH33	(TH ₂)	mix	6.3	0.2	250	100	-2.0	3.0	3.0	1.3	0.65	11.0	4.9	9.0	0.003	IO	3	
		osc			100			3.3					8.8	4.4	1.4			
EK32	(O)	mix	6.3	0.2	250	50	-2.0	1.0	0.8	2.0	0.55	21.0	9.0	10.5	0.1	IO	1	
EK2		osc			200			2.5					6.0	5.0		Ct8	2	
FC13	(O)	mix	13.0	0.2	200	70	-1.5	1.6	3.8	2.0	0.6	12.0	9.0	12.5	0.1	Ct8	2	
FC13C		osc			90			2.0					9.4	6.1		B7	2	
TH13C	(TH ₂)		13.0	0.31				Other data as Type TH4A										
TH21C	(TH ₂)	mix	21.0	0.2	250	70	-1.5	4.0	6.0	1.5	1.0	28.0	7.4	14.3		B7	3	
		osc			130			6.0							1.8			
TH22C	(TH ₂)		29.0	0.2				Other data as Type TH4A										
TH30C	(TH ₂)	mix	29.0	0.2	250	100	-2.5	3.25	6.0	1.5	0.75	11.0	8.4	13.8		B7	3	
		osc			100			9.5					13.6	3.5				
<i>Replacement Types</i>																		
DF97			1.4*	0.025	85	47	0	0.54	0.8	0.5	0.265	16.8	3.7	7.5	0.01	B7G	59	
DK32	(H)	mix	1.4*	0.05	90	45	0	0.6	0.7	0.6	0.25	10.0	7.0	10.0	0.5	IO	76	
		osc			90			1.2					4.0	4.4	0.9			
DK40	(O)	mix	1.4*	0.05	90	67.5	0	1.0	0.25	1.0	0.425	11.2	6.9	9.6	0.16	B8A	25	
		osc			65.5			2.6										
DK91	(H)		1.4*	0.05	90	45	0	0.8	1.9	0.8	0.25	15.0	7.0	7.5	0.4	B7G	3	
DK92	(H)	mix	1.4*	0.05	85	60	0	0.7	0.15	0.65	0.325	6.0	7.5	7.5	0.4	B7G	54	
		osc			30			1.4										
DK96	(H)	mix	1.4*	0.025	85	68	0	0.6	0.14	0.8	0.3	5.6	7.4	8.1	0.36	B7G	54	
		osc			35			1.5										
FC4	(O)	mix	4.0	0.65	250	70	-1.5	1.6	3.8		0.6	12.0	9.0	12.5	0.06	B7	2	
		osc			90			2.0					9.4	6.1				
ECH82	(TP)	mix	6.3	0.45	250	117	0	5.2	1.9		1.9	4.25	5.0	2.6	0.01	B9A	25	
		osc			150		-1.0	18.0		0.005			2.5	0.4	1.8			
ECH3	(TH ₂)	mix	6.3	0.2	250	100	-2.0	3.0	3.0	1.3	0.65	11.0	4.9	9.0	0.003	Ct8	1	
		osc			100			3.3					8.8	4.4	1.4			
ECH21	(TH)	mix	6.3	0.33	250	100	-2.0	3.0	6.2	1.4	0.75	14.0	6.8	9.5	0.002	B8B	42	
		osc			160			4.5					4.5	3.5	1.1			
6A8								Other data (except connections) as Type 6A7										
6K8	(TH ₂)	mix	6.3	0.3	250	100	-3.0	2.5	6.0	0.6	0.36	7.5	6.6	3.5	0.03	IO	1	
		osc			100			3.8					6.0	3.2	1.1	IO	4	
ECH35	(TH ₂)	mix	6.3	0.225	250	100	-2.0	3.0	3.0	1.3	0.65	11.0	5.0	10.0	0.0003	IO	3	
		osc			100			3.3					9.0	3.0	1.6			
ECH42	(TH ₂)	mix	6.3	0.23	250	85	-2.0	3.0	3.0	1.0	0.75	11.0	4.0	9.2	0.1	B8A	3	
		osc			115			4.8					5.5	2.3	1.2			
CCH35	(TH ₂)		7.0	0.2				Other data as Type ECH35										
PCF82	(TP)	mix	9.5	0.3	170	170	0	6.6	2.5		1.65	4.2	5.0	2.6	0.01	B9A	25	
		osc			150		-1.0	18.0					2.5	0.4	1.8			
12K8			12.8	0.15				Other data as Type 6K8										
UCH42	(TH ₂)	mix	14.0	0.1	200	85	-2.0	3.0	3.0	1.0	0.75	13.0	3.8	9.2	0.1	B8A	3	
		osc			100			3.1					5.5	2.3	1.2			
UCH21	(TH)	mix	20.0	0.1	200	100	-2.0	3.5	6.5	1.0	0.75	13.0	6.8	9.5	0.002	B8B	42	
		osc			120			4.1					4.5	3.5	1.1			
UCF80	(TP)	mix	27.0	0.1	170	170	-5.5	5.2	1.5	0.87	2.1	5.0	5.5	3.8	0.025	B9A	25	
		osc			100		-2.0	14.0					2.3	0.3	1.5			
<i>Current Types</i>																		
ECH80	(TP)	mix	6.3	0.43	250	180	-5.8	5.7	1.4	1.5	2.1	5.0	5.2	3.8	0.025	B9A	25	
		osc			100		-2.0	14.0					2.5	1.8	1.5			
ECH81	(TH)	mix	6.3	0.3	250	250	-2.0	6.5	3.8	0.7	0.775	13.0	4.8	7.9	0.006	B9A	24	
		osc			100		0	13.5					2.6	2.1	1.0			
ECH83	(TH)	mix	6.3	0.3	12.6	12.6		0.15	0.35	1.5	0.2	2.5	4.8	7.9	0.01	B9A	24	
		osc			12.6		0	0.75	0.042				2.6	2.1	1.0			
EK90	(H)		6.3	0.3	250	100	-1.5	3.0	7.1	1.0	0.475	10.0	7.2	8.6	0.3	B7G	29	
PCF86	(TP)	mix	8.0	0.3	190	140		8.5	2.7	0.6	4.5	3.2	6.0	3.5	0.012	B9A	64	
		osc			100		-3.0	14.0		0.003			2.4	1.1	2.0			
PCF80	(TP)	mix	9.0	0.3	170	170	-5.5	5.2	1.5	0.87	2.1	5.0	5.5	3.8	0.025	B9A	25	
		osc			100		-2.0	14.0					2.3	0.3	1.5			

(Continued)

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base			
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				c_{gr}	c_{st}	c_{ro}	Type	Ref.		
MULLARD (Continued)																	
<i>Current Types (Continued)</i>																	
PCF84	(TP)	mix osc	9.0	0.3	170 100	170 —	0 -2.0	8.0 14.0	2.7 —	0.4 0.004	2.5 —	—	—	—	B9A	65	
HK90	(H)	—	12.6	0.15	—	—	—	—	—	—	—	—	—	—	—		
UCH81	(TH)	mix osc	19.0	0.1	200 100	120 —	-2.6 0	3.7 13.5	8.1 —	1.0 —	0.78 —	—	4.8 2.6	7.9 2.1	0.006 1.0	B9A 24	
Other data as Type EK90																	
TUNGSRAM																	
<i>Obsolete Types</i>																	
MH206	(H)	mix	2.0*	0.06	135	67.5	-3.0	1.2	2.5	0.4	0.28	10.0	10.5	9.0	0.25	B7	1
VO2	(O)	mix	2.0*	0.13	135	45	0	0.7	0.6	2.5	0.27	11.0	9.1	14.3	0.07	B7	1
VO2S		osc	—	—	135	—	—	1.3	—	—	—	—	6.6	8.7	—	CLR	31
VX2	(H)	mix	2.0*	0.13	150	60	-1.0	1.0	1.1	2.0	0.47	14.0	7.8	15.0	0.0015	B7 C18	28 31
VX2S		osc															
2A7	(H)	mix osc	2.5	0.8	250 135	100 —	-3.0 —	3.5 2.3	2.2 —	0.36 —	—	—	5.0	6.0	0.8	UX7	1
MO465	(O)	mix osc	4.0	0.65	250 70	70 —	-1.5 —	1.6 2.0	3.8 —	1.0 —	0.6 —	12.0	9.0	12.5	0.06	B7	2
TX4	(TH ₂)	mix osc	4.0	1.0	300 150	80 —	-1.5 —	5.5 4.0	6.0 —	1.5 —	1.0 —	17.0	6.2	13.0	0.05	B7	3
VO4	(O)	mix osc	4.0	0.65	250 90	70 —	-1.5 —	1.6 —	3.8 —	1.0 —	0.6 —	12.0	9.0	12.5	0.06	B7	2
VX4	(H)	mix	4.0	0.65	250	80	-2.0	1.8	1.5	1.5	0.55	12.5	7.4	15.7	0.003	B7 C18	35 11
VX4S		osc															
6E8	(TH ₂)	mix	6.3	0.3	250	—	-2.0	—	—	—	—	—	—	—	—	IO	1
6TH8	(TH ₂)	mix osc	6.3	0.6	300 150	80 —	-1.5 —	5.5 4.0	6.0 —	2.0 —	1.0 —	17.0	6.2	13.0	0.05	IO	3
ECH2	(TH ₂)	mix osc	6.3	0.95	250 100	100 —	-2.5 —	3.25 5.0	7.0 —	1.5 —	0.75 —	12.0	8.0	13.0	0.8	C18	1
ECH3	(TH ₂)	mix osc	6.3	0.2	250 150	100 —	-2.0 —	3.2 3.3	3.0 —	1.0 —	0.65 —	10.0	4.7	9.0	0.0015	C18	1
EH2	(H)	mix	6.3	0.2	250	100	-3.0	4.2	2.8	2.0	0.4	19.0	—	—	—	C18	16
EK2	(O)	mix osc	6.3	0.2	250 200	60 —	-2.0 —	1.1 2.5	1.0 —	2.0 —	0.55 —	12.0	8.4	11.3	—	C18	2
EK3	(O)	mix osc	6.3	0.65	250 100	100 —	-2.5 —	2.5 6.0	5.5 —	2.0 —	0.65 —	17.0	14.5	15.0	0.1	C18	2
VO13	(O)	mix osc	13.0	0.2	250 90	70 —	-1.5 —	1.6 2.5	3.8 —	1.0 —	0.6 —	12.0	8.7	12.5	0.06	B7	2
VO13S	(O)	mix osc	13.0	0.2	250 90	70 —	-1.5 —	1.6 2.5	3.8 —	1.0 —	0.6 —	12.0	8.7	12.5	0.06	C18	2
VX13	(H)	mix	13.0	0.2	250	80	-2.0	1.8	1.5	1.5	0.55	12.5	7.4	15.7	0.003	B7 C18	35 11
VX13S		osc															
TX21	(TH ₂)	mix osc	21.0	0.2	250 150	80 —	-1.5 —	5.5 4.0	6.0 —	1.5 —	1.0 —	17.0	6.2	13.0	0.05	B7	3
TH29	(TH ₂)	mix osc	29.0	0.2	250 125	100 —	-2.0 —	3.5 —	7.5 —	1.5 —	0.75 —	12.0	8.0	12.8	—	B7	3
<i>Replacement Types</i>																	
MH4105	(H)	mix osc	4.0	0.5	250 200	100 —	-3.0 —	3.5 4.0	2.2 —	0.36 —	0.52 —	35.0	8.5	9.0	0.3	B7	2
TH4A	(TH ₂)	mix osc	4.0	1.45	250 125	100 —	-2.0 —	3.5 5.0	7.5 —	1.5 —	0.75 —	12.0	8.0	12.8	—	B7	3
<i>Current Types</i>																	
1AB6	(H)	mix osc	1.4*	0.025	85 —	68 —	0 —	0.6 —	0.14 —	0.8 —	0.3 —	6.0 —	7.6	8.4	0.36	B7G	54
1AC6	(H)	mix osc	1.4*	0.05	85 —	60 —	0 —	0.7 —	0.15 —	0.65 —	0.325 —	6.0 —	7.5	8.5	0.4	B7G	54
1R5	(H)	mix	1.4*	0.05	90	45	0	0.8	1.9	0.8	0.25	15.0	7.0	7.5	0.4	B7G	3
6A7	(H)	mix	6.3	0.3	250	100	-3.0	3.5	2.7	0.36	0.55	20.0	12.0	12.0	0.06	UX7 IO	1 1
6A8		osc															
6AJ8	(TH)	mix osc	6.3	0.3	250 100	100 —	-2.0 —	6.5 13.5	3.8 —	0.7 —	0.775 —	13.0	4.8	7.9	0.006	B9A	24
6BE6/EK90	(H)	mix	6.3	0.3	250	100	-1.5	3.0	7.1	1.0	0.47	10.0	7.2	8.6	0.3	B7G	29
6CU7	(TH ₂)	mix osc	6.3	0.23	250 115	85 —	-2.0 —	3.0 4.8	3.0 —	1.0 —	0.75 —	11.0	4.0	9.2	0.1	B8A	3
6K8	(TH ₂)	mix osc	6.3	0.3	250 100	100 —	-3.0 —	2.5 3.8	6.0 —	0.6 —	0.35 —	7.5	6.6	3.5	0.03	IO	4
6SA7	(H)	mix	6.3	0.3	250	100	-2.0	3.5	8.5	1.0	0.45	—	9.5	12.0	0.13	IO	6
6U8	(TP)	mix osc	6.3	0.45	250 150	100 —	0 —	5.2 5.7	1.9 —	0.4 —	1.9 —	4.0	5.0	2.6	0.01	B9A	25
ECF80	(TP)	mix osc	6.3	0.43	170 100	170 —	-5.5 -2.0	5.2 14.0	1.5 —	0.87 —	2.1 —	5.0	5.2	3.8	0.025	B9A	25

(Continued)

Frequency-changers

Type	Heater		Volts			Current (mA)		r_p (M Ω)	g_c (mA/V)	Osc. Volts (peak)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen				c_{pk}	c_{ab}	c_{ga}	Type	Ref.	
TUNGSRAM (Continued)																
<i>Current Types (Continued)</i>																
ECH35	(TH ₂)	mix osc	6.3 0.3	250 150	100 —	—2.0 —	2.3 —	3.0 —	1.25 —	0.65 —	10.0 —	4.5 8.8	9.0 4.0	0.0015 1.5	IO	13
CCH35	(TH ₂)	mix	7.0	—	—	—	—	—	—	—	—	—	—	—	—	—
7HG8	(TP)	mix osc	8.0 0.3	170 100	150 —	-1.2 -3.0	10.0 14.0	3.3 —	0.735 —	4.5 —	2.3 —	6.0 2.2	3.5 1.1	<2.5 2.2	B9A	64
9A8	(TP)	mix osc	9.0 0.3	170 100	170 —	-5.5 -2.0	5.2 14.0	1.5 —	0.87 —	2.1 —	5.0 —	5.5 2.3	3.8 0.3	0.025 1.5	B9A	25
9U8	(TP)	mix osc	9.5 0.3	170 150	100 —	0 —	5.2 5.7	1.9 —	0.4 —	1.9 —	4.0 —	5.0 2.5	2.6 0.4	0.01 1.8	B9A	25
12A8			12.6	0.15											IO	1
12BE6			12.6	0.15											B7G	29
12K8			12.6	0.15											IO	4
12SA7			12.6	0.15											IO	6
14K7	(TH ₂)	mix osc	14.0 0.1	200 100	85 —	-2.0 —	3.0 3.1	3.0 —	1.0 —	0.75 —	13.0 —	3.8 5.5	9.2 2.3	0.1 1.2	B8A	3
UCH81	(TH)	mix osc	19.0 0.1	200 100	120 —	-2.6 0	3.7 13.5	8.1 —	1.0 —	0.78 —	— —	4.8 2.6	7.9 2.1	0.006 1.0	B9A	24
UCF80	(TP)	mix osc	27.0 0.1	170 100	170 —	-5.5 -2.0	5.2 14.0	1.5 —	0.07 —	2.1 —	5.0 —	5.5 2.3	3.8 0.3	0.025 1.5	B9A	25

AMERICAN

Current Types

1AE5	(H)	mix	1.25*	0.06	45	45	0	0.9	2.0	0.2	0.2	—	—	—	—	Wires	
1C8	(H)	mix	1.25*	0.04	30	30	0	0.32	0.75	0.3	0.1	—	6.5	4.0	0.25	—	
1E8	(H)	mix	1.25*	0.04	67.5	45	—	1.0	1.5	0.4	0.15	—	—	—	—	Wires	
2G22			1.25*	0.05	22.5	22.5	0	0.2	0.3	0.5	0.06	—	—	—	—	Wires	
1A7	(H)	mix osc	1.4*	0.05	90 90	45 —	0 —	0.6 1.2	0.7 —	0.6 —	0.25 —	7.0 —	7.0 3.4	10.0 4.4	0.5 0.9	IO	76
1B7	(H)	mix osc	1.4*	0.1	90 90	45 —	0 —	1.5 1.6	1.3 —	0.35 —	0.35 —	7.0 —	7.0 4.0	7.5 4.2	0.34 0.9	IO	76
1LA6	(H)	mix osc	1.4*	0.05	90 90	45 —	0 —	0.55 1.2	0.6 —	0.75 —	0.25 —	7.0 —	7.7 2.9	8.0 3.3	0.4 0.6	B8B	29
1LB6	(H)	mix	1.4*	0.05	90	67.5	0	0.4	2.2	—	—	—	—	—	B8B	30	
1LC6	(H)	mix	1.4*	0.05	90	35	0	0.75	0.7	0.65	—	35.0	9.0	5.5	0.3	B8B	29
1A6	(H)	mix	2.0*	0.06	135	67.5	-3.0	1.7	2.5	0.4	0.27	10.0	10.5	9.0	0.25	UX6	1
1D7	(H)	osc	—	—	135	—	—	2.3	—	—	—	—	5.0	6.0	0.8	IO	76
1C6	(H)	mix	2.0*	0.12	135	67.5	-3.0	1.3	2.5	0.6	0.3	10.0	10.0	14.0	0.26	UX6	1
1C7	(H)	osc	—	—	135	—	—	3.1	—	—	—	—	4.8	5.5	1.2	IO	76
6BA7	(H)	mix	6.3	0.3	250	100	-1.0	3.8	10.0	1.0	0.95	7.0	9.5	8.3	0.19	B9A	3
6D8	(H)	mix osc	6.3 0.15	250 135	100 —	-3.0 —	3.5 4.3	2.6 —	0.4 —	0.55 —	20.0 —	8.0 5.5	11.0 4.6	0.2 1.1	IO	1	
6F7	(TP)	mix osc	6.3 0.3	250 100	100 —	-3.0 —	2.8 2.4	0.6 —	2.0 —	0.3 —	7.0 —	3.2 2.5	12.5 3.0	0.008 2.0	UX7	13	
6J8	(TH)	mix osc	6.3 0.3	250 100	100 —	-3.0 —	1.3 5.0	2.9 —	4.0 —	0.29 —	20.0 —	4.4 11.7	8.8 5.5	0.01 2.2	IO	3	
6L7	(H)	mix	6.3	0.3	250	150	-6.0	3.3	8.3	1.0	0.35	18.0	7.5	11.0	0.001	IO	2
6P8	(TH ₂)	mix osc	6.3 0.8	250 300	75 —	-2.0 —	1.5 2.2	1.4 —	— —	— —	— —	— —	— —	— —	IO	4	
6SA7	(H)	mix	6.3	0.3	250	100	-2.0	3.5	8.5	1.0	0.45	—	9.5	12.0	0.13	IO	6
6SA7GT/G	(H)	mix	6.3	0.3	250	100	-1.0	3.8	10.0	1.0	0.95	7.0	9.6	9.2	0.15	IO	7
6SB7Y	(O)	mix	6.3	0.15	250	100	-3.0	3.0	3.2	0.7	0.55	20.0	7.5	9.0	0.15	B8B	9
7A8	(H)	mix osc	6.3 0.3	250 100	100 —	-3.0 —	3.5 4.2	2.7 —	0.36 —	0.55 —	20.0 —	9.0 3.8	12.0 3.4	0.2 0.6	B8B	9	
7B8	(TH ₂)	mix osc	6.3 0.15	250 100	100 —	-3.0 —	4.0 —	— —	— —	— —	— —	4.8 —	3.0 —	0.8 —	B8B	8	
14B8	(TH ₂)	mix osc	6.3 0.45	250 150	— —	— —	— 3.5	— —	— —	— —	— —	— —	— —	— —	B8B	8	
7D7	(TH ₂)	mix osc	6.3 0.15	250 100	100 —	-3.0 —	1.3 5.4	2.9 —	1.5 —	0.3 —	20.0 —	5.5 8.5	7.5 2.0	0.01 1.0	B8B	8	
12A8			12.6	0.15													
12BA7			12.6	0.15													
12SA7			12.6	0.15													
12SY7	(H)	mix	12.6	0.15	250	100	-2.0	3.5	8.5	1.0	0.45	28.0	9.0	12.0	0.13	IO	6
2018	(TH)	mix osc	20.0 0.15	250 100	100 —	-3.0 —	1.5 1.5	3.4 —	— —	— —	— —	— —	— —	— —	IO	2	
21A7	(TH ₂)	mix osc	21.0 0.16	250 150	100 —	-3.0 —	1.3 3.5	2.8 —	— —	0.27 —	— —	— —	— —	— —	B8B	8	
26D6	(H)	mix	26.5	0.07	250	100	-1.5	3.0	7.8	1.0	0.47	26.5	7.5	14.0	0.3	B7G	29

SCREENED TETRODES and PENTODES

Type	Heater		Volts			Current (mA)		r_o (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{ob}	c_{ab}	c_{gs}	Type	Ref.	
BRIMAR															
<i>Obsolete Types</i>															
1L4		1.4*	0.05	90	90	0	4.5	2.0	0.35	1.03	3.6	7.5	0.008	B7G	2
1LD5	(SD)	1.4*	0.05	90	45	0	0.6	0.1	0.75	0.58	3.2	6.0	0.18	B8B	31
1LN5		1.4*	0.05	90	90	0	1.6	0.35	1.1	0.8	3.4	0.8	0.007	B8B	28
32E		2.0*	0.06	135	67.5	-3	1.7	0.4	1.0	0.6	—	—	—	UX4	2
34E		2.0*	0.06	135	67.5	-3	2.8	1.0	0.6	0.6	—	—	—	UX4	2
24A/24E	(TT)	2.5	1.75	250	90	-3	4.0	1.7	0.6	1.0	—	—	—	UX5	2
8A1		4.0	1.0	200	80	-1.5	3.5	0.7	0.6	4.0	10.7	8.0	0.007	B5 B7	2 5
9A1	(VM)	4.0	1.0	200	80	-1.5	5.0	1.0	0.6	4.25	11.0	8.0	0.007	B5 B7	2 5
6U7	(VM)	6.3	0.3	250	100	-3.0	8.2	2.0	0.8	1.6	4.7	6.5	0.007	10	8
7R7	(DD)	6.3	0.3	250	100	-1.0	6.2	1.6	1.0	3.2	5.6	5.3	0.004	B8B	13
36	(TT)	6.3	0.3	250	90	-3	3.2	1.7	0.55	1.1	—	—	—	UX5	2
39/44		6.3	0.3	250	90	-3	5.8	1.4	1.0	1.1	—	—	—	UX5	2
77		6.3	0.3	250	100	-3.0	2.3	0.5	1.0	1.25	4.7	11.0	0.007	UX6	2
78	(VM)	6.3	0.3	250	100	-3.0	7.0	1.7	0.8	1.45	4.5	11.0	0.007	UX6	2
12C8	(DD)	12.6	0.15	Other data as Type 6B8											
12J7		12.6	0.15	Other data as Type 6J7											
12K7	(VM)	12.6	0.15	Other data as Type 6K7											
14H7	(VM)	12.6	0.15	Other data as Type 7H7											
14R7	(DD)	12.6	0.15	Other data as Type 7R7											
8D2		13.0	0.2	250	100	-3.0	2.0	0.5	1.5	1.25	4.0	10.0	0.01	B7	6
9D2	(VM)	13.0	0.2	250	125	-3.0	10.5	2.6	0.6	1.65	4.0	10.0	0.005	B7	6
<i>Replacement Types</i>															
1S5	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.625	2.2	2.4	0.2	B7G	5
1T4	(VM)	1.4*	0.05	90	67.5	0	3.5	1.4	0.5	0.9	3.6	7.5	0.01	B7G	2
1U5	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.625	—	—	0.1	B7G	11
DAF96/1AH5	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	1.8	2.7	0.3	B7G	5
DF96/1AJ4		1.4	0.025	85.0	64.0	0	1.65	0.55	1.0	0.85	3.3	7.8	0.01	B7G	2
6AK5		6.3	0.175	180	120	-1.8	7.7	2.4	0.5	5.1	4.0	2.1	0.03	B7G	14
6B8	(DD)	6.3	0.3	250	125	-3.0	9.0	2.3	0.6	1.12	4.5	10.0	0.005	10	15
6C6		6.3	0.3	250	100	-3.0	2.0	0.5	1.0	1.23	7.0	12.0	0.005	UX6	2
6D6	(VM)	6.3	0.3	250	100	-3.0	8.2	2.0	0.8	1.6	4.7	6.5	0.007	UX6	2
6J7		6.3	0.3	250	100	-3.0	2.0	0.5	1.5	1.25	4.6	12.0	0.007	10	8
6K7	(VM)	6.3	0.3	250	125	-3.0	10.5	2.6	0.6	1.65	5.0	12.0	0.007	10	8
7B7	(VM)	6.3	0.15	250	100	-3.0	8.5	1.7	0.75	1.75	5.0	6.0	0.007	B8B	3
7H7	(VM)	6.3	0.3	250	150	-2.5	9.5	3.5	0.8	4.2	8.0	7.0	0.007	B8B	3
9D6	(VM)	6.3	0.2	250	200	-2.5	8.0	2.1	1.0	2.5	4.5	7.0	0.004	B7G	21
6063 (SQ)	(VM, DD)	6.3	0.3	250	85	-2.0	5.0	1.75	1.5	2.2	4.2	4.9	0.0025	B9A	12
EBF80/6N8		6.3	0.2	250	100	-2.5	6.0	1.7	1.0	2.2	4.7	8.0	0.002	B8A	7
EF41		12.6	0.1	200	115	-3.0	7.2	2.1	1.0	2.3	5.0	7.0	0.002	B8A	7
UF41	(VM)	12.6	0.1	200	115	-3.0	7.2	2.1	1.0	2.3	5.0	7.0	0.002	B8A	7
<i>Current Types</i>															
6AM6/8D3	}	6.3	0.3	250	250	-2.0	10.0	2.6	1.0	7.5	7.5	3.2	0.01	B7G	21
6064 (SQ)		6.3	0.3	250	150	-1.0	10.8	4.3	1.0	5.2	5.5	5.0	0.0035	B7G	16
6AU6	(VM)	6.3	0.3	250	100	-1.0	11.0	4.2	1.5	4.4	5.5	5.0	0.0035	B7G	16
6BA6		6.3	0.3	250	100	-1.0	11.0	4.2	1.5	4.4	5.5	5.0	0.0035	B7G	16
5749 (SQ)		6.3	0.15	250	150	-1.0	7.4	2.9	1.4	4.6	5.4	4.4	0.0035	B7G	32
6BH6	(VM)	6.3	0.15	250	100	-1.0	9.2	3.3	1.3	3.8	4.5	5.5	0.0035	B7G	32
6BJ6		6.3	0.15	250	100	-1.0	9.2	3.3	1.3	3.8	4.5	5.5	0.0035	B7G	32
6BR7/8D5	}	6.3	0.15	250	100	-3.0	2.1	0.6	2.3	1.25	4.0	4.0	0.01	B9A	35
6059 (SQ)		6.3	0.15	250	100	-3.0	2.1	0.6	2.3	1.25	4.0	4.0	0.01	B9A	35
6BR8	(TP)	6.3	0.45	170	110	-0.9	9.5	3.3	0.5	5.25	5.0	2.6	0.01	B9A	67
6BS7		6.3	0.15	250	100	-3.0	2.1	0.6	2.3	1.25	4.0	4.0	0.01	B9A	20
6BW7		6.3	0.3	180	180	-1.5	9.5	3.5	0.6	9.3	9.5	3.5	0.01	B9A	10
8D8		6.3	0.15	250	140	-2.0	3.0	0.6	2.5	1.9	4.0	3.9	1.3	B9A	23
9D7	(VM)	6.3	0.3	250	100	-1.3	10.0	3.3	0.75	8.4	9.0	3.0	0.01	B9A	10
6870 (SQ)		6.3	0.6†	250	250	-3.4	25.0	3.5	0.23	8.5	8.5	7.0	0.025	B9A	44
7032 (SQ)	Gating Heptode	6.3	0.3	250	100 (g ₁)	-2.0	4.5	7.2	—	(g ₁ -a) 1.8	—	—	—	B7G	29
					(g ₂) 0					(g ₂ -a) 0.5					
ECF80	(TP)	6.3	0.43	250	200	-3.2	7.0	1.8	0.9	5.5	5.5	3.8	0.025	B9A	25
EF80/6BX6		6.3	0.3	170	170	-2.0	10.0	2.5	0.5	7.4	7.5	3.3	0.007	B9A	10
EF89/6DA6	(VM)	6.3	0.2	250	100	-1.95	9.0	3.0	1.0	3.5	5.5	5.1	0.002	B9A	35
EF183	(VM)	6.3	0.3	190	90	-2.0	12.0	4.5	0.5	13.0	9.0	3.0	0.005	B9A	10
EF184		6.3	0.3	200	200	-2.5	10.0	3.8	0.35	15.0	10.0	3.0	0.005	B9A	10
PCF80	(TP)	9.0	0.3	170	170	-2.0	10.0	2.8	0.4	6.2	5.5	3.8	0.025	B9A	25
12AC6	(VM)	12.6	0.15	12.6	12.6	0	0.55	0.2	0.5	0.73	4.3	5.0	0.005	B7G	16
12AU6		12.6	0.15	Other data as Type 6AU6											

(Continued)

Screened Tetrodes and Pentodes

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gt}	c_{ak}	c_{ga}	Type	Ref.	
BRIMAR (Continued)															
<i>Current Types (Continued)</i>															
12BA6	(VM)	12.6	0.15	Other data as Type 6BA6											
12BL6	(VM)	12.6	0.15	12.6	12.6	0*	1.4	0.55	0.5	1.35	5.2	5.4	0.005	B7G	16
PCL84	(TP)	15.0	0.3	220	220	-3.3	18.0	3.2	0.15	9.5	9.0	4.5	0.1	B9A	53
* Grid current biasing $R_{g1}=2.2$ M Ω															
COSSOR															
<i>Obsolete Types</i>															
21SSG		2.0*	0.15	150	60	0	2.5	0.5	0.3	1.1	9.0	7.0	0.001	B4	2
220SG		2.0*	0.2	150	60	0	3.1	0.6	0.2	1.6	9.0	7.0	0.001	B4	2
220VS	(VM)	2.0*	0.2	150	60	0	3.6	0.9	0.4	1.6	9.5	7.0	0.001	B4	2
220VSG	(VM)	2.0*	0.2	150	60	0	5.0	0.7	0.11	1.6	9.5	7.0	0.001	B4	2
220IPT		2.0	0.2	120	60	-1.5	2.2	0.5	0.4	1.0	—	—	—	B7	26
4TSP	}	4.0	1.0	250	150	-3.0	12.0	—	—	8.0	—	—	—	B7	5
4TPB															
41MTS		4.0	1.0	250	100	0	5.0	—	—	1.6	—	—	—	B7	6
42PTB		4.0	2.0	200	200	-3.0	34.0	6.5	0.1	8.5	—	—	—	B7	20
MS/PenA		4.0	1.0	200	150	-2.5	9.0	5.0	0.09	4.0	—	—	—	B5	2
MSGHA		4.0	1.0	200	80	-1.5	2.1	—	0.5	2.0	—	—	—	B5	2
MSGLA		4.0	1.0	200	80	-1.5	5.25	—	0.2	3.75	—	—	—	B5	2
MVS/PenB	(VM)	4.0	1.0	200	100	-1.5	4.3	1.3	0.6	2.2	9.5	8.5	0.003	B7	6
MVSG	(VM)	4.0	1.0	200	80	-1.5	7.5	0.75	0.2	2.5	—	—	—	B5	2
6SG7	(VM)	6.3	0.3	250	150	-2.5	9.2	3.4	1.0	4.0	8.5	7.0	0.003	10	14
6SH7		6.3	0.3	250	150	-1.0	10.8	4.1	0.9	4.9	8.5	7.0	0.003	10	14
6SK7	(VM)	6.3	0.3	250	100	-3.0	9.2	2.6	0.8	2.0	6.5	7.5	0.005	10	10
6SS7	(VM)	6.3	0.15	250	100	-3.0	9.0	2.0	1.0	1.85	5.5	7.0	0.004	10	10
12SG7	(VM)	12.6	0.15	250	150	-2.5	9.2	3.4	1.0	4.0	8.5	7.0	0.003	10	14
13SPA		13.0	0.2	200	100	-3.0	2.3	0.6	1.0	1.25	5.0	9.0	0.003	B7	6
13VPA	(VM)	13.0	0.2	200	100	-3.0	7.0	1.7	0.8	1.8	5.0	9.0	0.003	B7	6
202SPB		20.0	0.2	250	100	-1.5	4.8	1.3	0.8	2.8	9.5	8.5	0.003	B7	6
<i>Replacement Types</i>															
1N5		1.4*	0.05	90	90	0	1.2	0.3	1.5	0.75	3.0	10.0	0.007	10	77
210SPT		2.0*	0.1	150	60	0	2.95	0.75	0.6	1.3	8.0	7.0	0.008	B7	4
210VPT	(VM)	2.0*	0.1	150	60	0	2.9	0.75	0.6	1.1	8.0	7.0	0.008	B7	4
4TSA		4.0	1.0	250	100	0	5.0	—	—	1.6	—	—	—	B7	38
41MPT		4.0	1.0	250	100	-1.5	12.0	2.0	0.2	4.8	—	—	—	B7	5
42MPT		4.0	2.0	200	200	-3.0	34.0	—	—	8.5	—	—	—	B7	5
42SPT		4.0	2.0	250	250	-10.5	64.0	15.0	—	11.0	18.0	7.5	0.08	B7	5
MS/Pen	}	4.0	1.0	200	100	-1.5	4.8	1.3	0.8	2.8	9.5	8.5	0.003	B7	5
MS/PenB															
MVS/Pen	(VM)	4.0	1.0	200	100	-1.5	4.3	1.3	0.6	2.2	9.5	8.5	0.003	B7	6
6J7		6.3	0.3	250	100	-3.0	2.0	0.5	1.5	1.25	5.0	12.0	0.007	10	8
6K7	(VM)	6.3	0.3	250	125	-3.0	10.5	2.6	0.6	1.65	5.0	12.0	0.007	10	8
202VP	}	(VM)	20.0	0.2	250	100	-1.5	4.3	1.3	0.6	2.2	9.5	8.5	0.003	B7
202VPB															
<i>Current Types</i>															
DAF91	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.63	2.2	2.4	0.2	B7G	5
DAF96	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	1.8	2.7	0.3	B7G	5
DF91	(VM)	1.4*	0.05	90	67.5	0	3.5	1.5	0.5	0.9	3.6	7.5	0.01	B7G	2
DF96		1.4*	0.025	85	64.0	0	1.65	0.55	1.0	0.75	3.3	7.8	0.01	B7G	2
210VPA	(VM)	2.0*	0.1	150	60	0	2.9	1.0	0.6	1.1	9.0	7.0	0.004	B7	4
6AS6		6.3	0.175	120	120	-2.0	5.2	3.5	0.11	3.2	4.0	3.0	0.02	B7G	32
6CB6		6.3	0.3	200	150	—	9.5	2.8	0.6	6.2	6.3	1.9	0.02	B7G	32
6CH6		6.3	0.75	250	250	-4.5	40.0	6.0	0.05	11.0	(Video output valve $P_a=12$ W)B9A			19	
6F33		6.3	0.35	200	100	-1.5	5.0	2.0	—	4.35	7.3	4.5	0.01	B7G	21
7B7	(VM)	6.3	0.15	250	100	-3.0	8.5	2.0	0.7	1.7	5.0	7.0	0.005	B8B	3
61SPT		6.3	1.27	250	250	-10.5	64.0	15.0	—	11.0	18.0	7.5	0.08	10	49
E180F		6.3	0.3	190	160	-1.0	13.0	3.0	0.035	16.5	7.9	2.9	0.02	B9A	45
EL91/6AM5		6.3	0.2	250	250	—	16.0	2.5	—	2.6	—	—	—	B7G	25
EF41/6ZVP		6.3	0.2	250	100	-2.5	6.0	1.7	1.0	2.2	4.7	8.0	0.002	B8A	7
EF50/63SPT		6.3	0.3	250	250	-2.0	10.0	3.0	1.0	6.5	8.3	5.2	0.007	B9G	1
EF80		6.3	0.3	170	170	-2.0	10.0	2.5	0.4	7.4	7.5	3.3	0.007	B9A	10
EF85	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10
EF86		6.3	0.2	250	140	-2.0	3.0	0.6	2.5	1.8	4.0	5.5	0.025	B9A	23
EF89	(VM)	6.3	0.2	250	100	-2.0	9.0	3.0	1.0	3.5	5.5	5.1	0.002	B9A	36
EF91		6.3	0.3	250	250	-2.0	10.0	2.5	1.0	7.5	7.5	3.2	0.007	B7G	21
EF183	(VM)	6.3	0.3	200	90	-2.0	12.0	4.5	0.5	12.5	9.0	3.0	<0.0055	B9A	10
EF184		6.3	0.3	170	170	-2.0	10.0	4.1	0.33	15.6	10.0	3.0	<0.005	B9A	10

(Continued)

Screened Tetrodes and Pentodes

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gc}	c_{ac}	c_{gr}	Type	Ref.	
COSSOR (Continued)															
<i>Current Types (Continued)</i>															
OM5B	6.3	0.2	250	100	-2.0	3.0	0.8	2.5	1.8	—	—	—	IO	8	
OM5C	Characteristics as OM5B but suitable for use in d.c. amplifiers														
OM6	(VM)	6.3	0.2	250	100	-2.5	6.0	1.8	1.0	2.0	6.3	7.8	0.003	IO	8
UF41	(VM)	12.6	0.1	170	100	-2.5	6.0	1.75	1.0	2.2	5.0	7.0	0.002	B8A	7
UF89	(VM)	12.6	0.1	170	110	-2.0	12.0	3.9	0.525	3.8	5.5	5.1	0.002	B9A	36
UBF80/171DDP	(VM, DD)	17.0	0.1	170	85	-2.0	5.0	1.75	0.9	2.2	4.0	4.6	0.0025	B9A	12
UBF89	(VM, DD)	19.0	0.1	200	100	-1.5	11.0	3.3	0.6	4.5	5.0	5.2	0.002	B9A	12
EDISWAN MAZDA															
<i>Obsolete Types</i>															
1F2 } 1L4 }		1.4*	0.05	90	67.5	0	2.9	1.2	0.6	0.92	3.6	7.5	0.008	B7G	2
SP141		1.4*	0.05	83	83	0	1.3	0.5	0.6	0.75	7.5	10.0	0.006	MO	4
S215A		2.0*	0.15	150	60	0	2.0	0.3	1.3	1.1	8.5	12.5	0.002	B4	2
S215B		2.0*	0.15	150	60	-1.0	1.5	0.3	0.9	1.2	10.5	10.5	0.002	B4	2
S215VM	(VM)	2.0*	0.15	150	60	-1.4	1.0	0.15	1.4	0.8	10.0	8.5	0.002	B4	2
SG215		2.0*	0.15	150	60	-1.5	1.5	0.25	1.5	0.85	8.5	11.0	0.003	B4	2
SP210		2.0*	0.1	120	120	-1.0	1.1	0.33	2.0	1.2	10.0	11.0	0.005	B7	4
SP215		2.0*	0.15	150	80	-1.5	2.1	0.7	0.8	1.6	10.0	8.5	0.007	B7	4
SP22		2.0*	0.1	120	120	-1.0	1.1	0.38	1.35	1.2	7.75	12.5	0.0055	MO	1
VP22	(VM)	2.0*	0.1	120	60	-1.5	1.2	0.32	1.3	0.8	7.0	12.5	0.0045	MO	1
VP23	(VM)	2.0*	0.05	120	60	-1.5	1.45	0.5	1.45	1.08	8.0	11.0	0.006	MO	1
VP210	(VM)	2.0*	0.1	120	60	-1.5	1.1	0.38	1.45	0.82	8.75	11.0	0.004	B7	4
VP215	(VM)	2.0*	0.15	120	60	-1.5	1.1	0.38	0.9	0.82	10.0	8.5	0.007	B7	4
AC/SG		4.0	1.0	200	60	-1.5	4.5	0.8	0.9	1.9	10.0	10.0	0.001	B5	2
AC/SG/VM	(VM)	4.0	1.0	200	60	-2.0	5.8	0.9	0.72	1.8	10.0	10.0	0.001	B5	2
AC/SP1		4.0	1.0	200	200	-3.0	4.9	4.1	0.12	2.65	13.0	8.75	0.0035	B7	5
AC/S2		4.0	1.0	200	80	-1.5	7.0	0.8	0.6	4.3	12.0	10.0	0.001	B5	2
AC/S1VM	(VM)	4.0	1.0	200	75	-1.5	5.6	1.5	0.55	1.1	6.5	11.5	0.001	B5	2
AC/S2Pen		4.0	1.0	250	100	-1.5	8.0	2.7	0.7	4.6	13.5	8.75	0.009	B7	5
AC/SP3		4.0	1.0	250	100	-1.7	7.9	2.5	0.55	7.0	14.5	11.0	0.005	B7	6
AC/VP1	(VM)	4.0	0.65	250	200	-2.8	7.4	1.85	1.0	2.0	9.5	8.0	0.003	B7	5
AC/VP2	(VM)	4.0	0.65	250	200	-2.8	7.4	1.85	1.0	2.0	7.0	9.5	0.0025	B7	6
SP41		4.0	0.95	200	200	-1.5	10.9	2.7	0.7	8.5	10.75	5.25	0.005	MO	11
V453		4.0	0.65	250	100	-1.75	4.5	0.8	—	2.0	6.75	11.6	0.004	MO	11
VP41	(VM)	4.0	0.65	250	200	-2.7	7.7	2.0	1.3	2.0	6.5	11.5	0.0025	MO	11
6F11		6.3	0.2	250	100	-1.8	4.4	1.35	2.8	2.2	5.3	6.7	0.004	B8A	8
6F16	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.0	2.2	4.7	8.0	0.002	B8A	18
SP61		6.3	0.6	—	—	—	—	—	—	—	—	—	—	—	—
SP1320		13.0	0.2	250	100	-1.5	4.4	0.9	—	2.05	10.0	8.0	0.005	B7	5
VP133	(VM)	13.0	0.2	150	150	-2.7	8.0	2.2	0.7	2.1	7.0	11.5	0.0025	MO	11
VP1320	(VM)	13.0	0.2	250	100	-1.7	5.0	1.1	2.0	2.0	9.75	8.5	0.005	B7	5
VP1321	(VM)	13.0	0.2	250	200	-2.8	7.4	1.85	1.0	2.0	9.75	8.5	0.005	B7	5
VP1322	(VM)	13.0	0.2	250	200	-2.8	7.4	1.85	1.0	2.0	7.0	9.5	0.0025	B7	6
SP181		18.0	0.2	200	200	-1.5	10.9	2.7	0.7	8.5	10.75	5.25	0.005	MO	11
10F3		22.0	0.1	200	200	-2.35	6.0	1.6	—	6.5	9.0	4.6	0.0065	B8A	8
SP2220		22.0	0.2	250	200	-3.0	4.9	4.1	0.12	2.65	13.0	8.75	0.0035	B7	5
<i>Replacement Types</i>															
1F3 } 1T4 }	(VM)	1.4*	0.05	90	45	0	1.8	0.65	0.8	0.75	3.6	7.5	0.01	B7G	2
1FD9 } 1S5 }	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.63	2.2	3.3	0.4	B7G	5
SP42		4.0	0.95	200	115	-1.25	20.0	5.0	—	8.5	10.0	7.0	0.0055	MO	11
6F1		6.3	0.35	200	200	-1.8	10.0	2.6	0.9	9.0	9.0	4.6	0.0065	B8A	17
6F12		6.3	0.3	250	250	-2.0	10.0	2.5	0.9	7.5	7.6	3.2	0.0045	B7G	21
6F13		6.3	0.35	200	200	-1.8	10.0	2.6	0.9	9.0	9.0	4.6	0.0065	B8A	8
6F14		6.3	0.35	135	135	-1.3	27.0	6.5	—	10.6	8.8	4.6	0.007	B8A	8
6F15	(VM)	6.3	0.2	250	100	-2.5	7.0	2.0	1.7	2.3	5.1	6.8	0.0035	B8A	8
6F32		6.3	0.63	200	200	-4.5	5.1	3.45	—	3.0	10.5	5.7	0.0005	MO	11
20F2		11.0	0.2	135	135	-1.3	27.0	6.5	—	10.6	8.8	4.6	0.007	B8A	8
10F9	(VM)	13.0	0.1	175	100	-2.5	7.0	2.0	1.0	2.3	5.1	6.8	0.0035	B8A	8
10F1		22.0	0.1	200	200	-1.8	10.0	2.6	0.9	9.0	9.0	4.6	0.0065	B8A	17
<i>Current Types</i>															
1F1	(VM)	1.4*	0.025	85	64	0	1.65	0.55	1.0	0.85	3.3	7.8	0.01	B7G	64
1FD1	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	1.8	2.7	0.3	B7G	65
30F27	(VM)	3.7	0.3	170	140	-1.25	13.5	1.7	—	15.0	6.3	1.8	0.027	B9A	61
6F18	(VM)	6.3	0.2	175	100	-1.3	12.0	3.5	—	4.4	5.0	4.3	0.0017	B9A	10
6F19	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10

(Continued)

Screened Tetrodes and Pentodes

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gr}	c_{as}	c_{ga}	Type	Ref.	
EDISWAN MAZDA (Continued)															
<i>Current Types (Continued)</i>															
6F20	(VM)	6.3	0.3	170	170	-2.0	10.0	2.5	0.4	6.0	7.5	3.3	0.007	B9A	10
6F21	(VM)	6.3	0.2	250	200	-2.5	7.8	2.0	1.2	2.5	4.7	7.0	0.008	B7G	21
6F22		6.3	0.2	250	140	-2.0	3.0	0.55	2.0	1.85	4.0	5.5	0.025	B9A	23
6F23		6.3	0.3	170	170	-1.9	10.0	2.6	—	9.2	8.3	3.3	0.0065	B9A	10
6F24		6.3	0.3	170	170	-1.9	10.0	2.7	—	15.0	8.8	2.6	0.006	B9A	10
6F25	(VM)	6.3	0.3	170	90	-1.5	11.5	2.8	—	12.5	8.5	2.7	0.006	B9A	10
6F26	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10
6F33		6.3	0.35	200	200	-4.0	5.75	3.1	—	3.55	7.3	4.5	0.01	B7G	21
6FD12	(VM, DD)	6.3	0.3	250	100	-2.0	9.0	2.7	1.0	3.8	5.0	5.2	0.0025	B9A	12
S6F12 (SQ)		6.3	0.3	250	250	-2.0	10.0	2.5	0.9	7.5	7.6	3.2	0.0045	B7G	21
S6F33 (SQ)		6.3	0.35	200	200	-3.3	7.1	4.35	0.1	4.05	7.55	4.55	0.01	B7G	21
30F5		7.3	0.3	170	170	-1.9	10.0	2.6	—	8.8	9.0	4.4	0.0073	B9A	10
30FL1	(T, BT)	9.4	0.3	170	170	-2.1	10.0	2.5	—	7.5	7.9	3.2	0.03	B9A	49
10F18	(VM)	13.0	0.1	175	100	-1.3	12.0	3.5	—	4.4	5.0	4.3	0.0017	B9A	10
10FD12	(VM, DD)	19.0	0.1	200	100	-1.5	11.0	3.3	0.6	4.5	5.0	5.2	0.0025	B9A	12

EMITRON

Current Types

IS5	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.625	2.2	2.4	0.2	B7G	5
IT4	(VM)	1.4*	0.05	90	67.5	0	3.5	1.4	0.5	0.9	3.6	7.5	0.01	B7G	2
6AM6		6.3	0.3	250	250	-2.0	10.0	2.5	1.0	7.5	7.5	3.2	0.007	B7G	21
6BA6		6.3	0.3	250	100	-1.0	11.0	4.2	1.0	4.4	5.5	5.0	0.0035	B7G	16
7B7	(VM)	6.3	0.15	250	100	-3.0	8.5	1.7	0.75	1.75	5.0	7.0	0.005	B8B	3
7H7	(VM)	6.3	0.3	250	150	-2.4	10.0	3.2	0.8	4.2	8.0	6.5	0.007	B8B	3

FERRANTI

Obsolete Types

S2		2.0*	0.15	120	60	-1.0	2.25	0.3	0.3	1.1	—	—	0.005	B4	2
VS2	(VM)	2.0*	1.15	120	60	-2.5	2.0	0.4	0.4	1.4	—	—	0.005	B4	2
VPT4B	(VM)	4.0	1.0	250	100	-3.0	6.0	3.0	1.8	3.2	10.6	8.2	0.004	B7	5
SPTA		13.0	0.2	250	100	-2.5	2.2	0.5	1.5	1.4	8.9	8.5	0.003	B7	6
VPTA		13.0	0.2	250	100	-2.0	4.2	2.0	1.0	2.9	9.0	9.0	0.002	B7	5
VPTS		13.0	0.3	200	100	-3.0	5.5	2.0	1.0	2.6	8.8	8.4	0.002	B7	5

Replacement Types

IN5		1.4*	0.05	90	90	0	1.2	0.3	1.5	0.75	3.0	10.0	0.007	IO	77
1S5/DAF91	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.63	2.2	2.4	0.2	B7G	5
IT4/DF91	(VM)	1.4*	0.05	90	67.5	0	3.5	1.5	0.5	0.9	3.6	7.5	0.01	B7G	2
SPT2		2.0*	0.1	120	120	0	2.8	0.9	2.0	1.5	10.0	10.5	0.008	B7	4
VPT2	(VM)	2.0*	0.1	120	60	-1.5	1.5	0.7	0.6	1.1	8.8	11.0	0.006	B4 B7	2 4
SPT4A		4.0	1.0	250	100	-1.5	2.0	1.0	1.5	2.3	10.6	8.0	0.003	B7	5
VPT4	(VM)	4.0	1.0	250	100	-3.0	5.5	3.0	1.0	2.0	8.8	8.5	0.002	B5	2
6AB7	(VM)	6.3	0.45	300	200	-3.0	12.5	3.2	0.7	5.0	8.0	5.0	0.015	IO	10
6AC7		6.3	0.45	300	150	-2.0	10.0	2.5	1.0	9.0	11.0	5.0	0.015	IO	10
6AM6/EF91		6.3	0.3	250	250	-2.0	10.0	2.6	1.0	7.5	7.5	3.2	0.01	B7G	21
6B8	(DD)	6.3	0.3	250	125	-3.0	10.0	2.3	0.6	1.33	3.5	9.5	0.007	IO	15
6C6		6.3	0.3	250	100	-3.0	2.0	0.5	1.0	1.23	7.0	12.0	0.005	UX6	2
6D6	(VM)	6.3	0.3	250	100	-3.0	8.2	2.0	0.8	1.6	4.7	6.5	0.007	UX6	2
6J7		6.3	0.3	250	100	-3.0	2.0	0.5	1.0	1.23	7.0	12.0	0.005	IO	8
6K7	(VM)	6.3	0.3	250	125	-3.0	10.5	2.6	0.6	1.65	5.0	12.0	0.007	IO	8
6SG7	(VM)	6.3	0.3	250	150	-2.5	9.2	3.4	1.0	4.0	8.5	7.0	0.003	IO	14
6SH7		6.3	0.3	250	150	-1.5	10.8	4.1	0.9	4.9	8.5	7.0	0.003	IO	14
6SJ7		6.3	0.3	250	100	-3.0	3.0	0.8	1.0	1.65	6.0	7.0	0.005	IO	10
6SK7	(VM)	6.3	0.3	250	100	-3.0	9.2	2.6	0.8	2.0	6.5	7.5	0.005	IO	10
6SS7	(VM)	6.3	0.15	250	100	-3.0	9.0	2.0	1.0	1.85	5.5	7.0	0.004	IO	10
6U7	(VM)	6.3	0.3	250	100	-3.0	8.2	2.0	0.8	1.6	4.7	6.5	0.007	IO	8
7H7	(VM)	6.3	0.3	250	150	-2.5	9.5	3.5	0.8	3.8	8.0	7.0	0.007	B8B	3
7R7	(DD)	6.3	0.3	250	100	-1.0	5.7	1.7	1.0	3.2	5.6	5.3	0.004	B8B	13
EAF42/6CT7	(VM, SD)	6.3	0.2	250	85	-2.0	5.0	1.5	1.4	2.0	4.5	5.1	0.002	B8A	12
EF41/6CJ5	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.0	2.2	4.7	8.0	0.002	B8A	7
EF42		6.3	0.33	250	250	-2.0	10.0	2.3	0.44	9.5	9.5	4.5	0.005	B8A	8
12C8	(DD)	12.6	0.15	250	125	-3.0	10.0	2.3	0.6	1.33	3.5	9.5	0.007	IO	15
12J7		12.6	0.15												
12K7	(VM)	12.6	0.15												
12SJ7		12.6	0.15												
12SK7	(VM)	12.6	0.15												
UAF42	(VM, SD)	12.6	0.1	200	85	-2.0	5.0	1.5	1.0	2.0	4.5	5.1	0.002	B8A	12
UF41	(VM)	12.6	0.1	170	100	-2.5	6.0	1.75	1.0	2.2	5.0	7.0	0.002	B8A	7

(Continued)

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gk}	c_{ak}	c_{oa}	Type	Ref.	
COSSOR (Continued)															
<i>Current Types (Continued)</i>															
OM5B	6.3	0.2	250	100	-2.0	3.0	0.8	2.5	1.8	—	—	—	10	8	
OM5C	Characteristics as OM5B but suitable for use in d.c. amplifiers														
OM6	(VM)	6.3	0.2	250	100	-2.5	6.0	1.8	1.0	2.0	6.3	7.8	0.003	10	8
UF41	(VM)	12.6	0.1	170	100	-2.5	6.0	1.75	1.0	2.2	5.0	7.0	0.002	B8A	7
UF89	(VM)	12.6	0.1	170	110	-2.0	12.0	3.9	0.525	3.8	5.5	5.1	0.002	B9A	36
UBF89/171DDP	(VM, DD)	17.0	0.1	170	85	-2.0	5.0	1.75	0.9	2.2	4.0	4.6	0.0025	B9A	12
UBF89	(VM, DD)	19.0	0.1	200	100	-1.5	11.0	3.3	0.6	4.5	5.0	5.2	0.002	B9A	12
EDISWAN MAZDA															
<i>Obsolete Types</i>															
1F2 } 1L4 }		1.4*	0.05	90	67.5	0	2.9	1.2	0.6	0.92	3.6	7.5	0.008	B7G	2
SP141		1.4*	0.05	83	83	0	1.3	0.5	0.6	0.75	7.5	10.0	0.006	MO	4
S215A		2.0*	0.15	150	60	0	2.0	0.3	1.3	1.1	8.5	12.5	0.002	B4	2
S215B		2.0*	0.15	150	60	-1.0	1.5	0.3	0.9	1.2	10.5	10.5	0.002	B4	2
S215VM	(VM)	2.0*	0.15	150	60	-1.4	1.0	0.15	1.4	0.8	10.0	8.5	0.002	B4	2
SG215		2.0*	0.15	150	60	-1.5	1.5	0.25	1.5	0.85	8.5	11.0	0.003	B4	2
SP210		2.0*	0.1	120	120	-1.0	1.1	0.33	2.0	1.2	10.0	11.0	0.005	B7	4
SP215		2.0*	0.15	150	80	-1.5	2.1	0.7	0.8	1.6	10.0	8.5	0.007	B7	4
SP22		2.0*	0.1	120	120	-1.0	1.1	0.38	1.35	1.2	7.75	12.5	0.0055	MO	1
VP22	(VM)	2.0*	0.1	120	60	-1.5	1.2	0.32	1.3	0.8	7.0	12.5	0.0045	MO	1
VP23	(VM)	2.0*	0.05	120	60	-1.5	1.45	0.5	1.45	1.08	8.0	11.0	0.006	MO	1
VP210	(VM)	2.0*	0.1	120	60	-1.5	1.1	0.38	1.45	0.82	8.75	11.0	0.004	B7	4
VP215	(VM)	2.0*	0.15	120	60	-1.5	1.1	0.38	0.9	0.82	10.0	8.5	0.007	B7	4
AC/SG		4.0	1.0	200	60	-1.5	4.5	0.8	0.9	1.9	10.0	10.0	0.001	B5	2
AC/SG/VM	(VM)	4.0	1.0	200	60	-2.0	5.8	0.9	0.72	1.8	10.0	10.0	0.001	B5	2
AC/SP1		4.0	1.0	200	200	-3.0	4.9	4.1	0.12	2.65	13.0	8.75	0.0035	B7	5
AC/S2		4.0	1.0	200	80	-1.5	7.0	0.8	0.6	4.3	12.0	10.0	0.001	B5	2
AC/S1VM	(VM)	4.0	1.0	200	75	-1.5	5.6	1.5	0.55	1.1	6.5	11.5	0.001	B5	2
AC/S2Pen		4.0	1.0	250	100	-1.5	8.0	2.7	0.7	4.6	13.5	8.75	0.009	B7	5
AC/SP3		4.0	1.0	250	100	-1.7	7.9	2.5	0.55	7.0	14.5	11.0	0.005	B7	6
AC/VP1	(VM)	4.0	0.65	250	200	-2.8	7.4	1.85	1.0	2.0	9.5	8.0	0.003	B7	5
AC/VP2	(VM)	4.0	0.65	250	200	-2.8	7.4	1.85	1.0	2.0	7.0	9.5	0.0025	B7	6
SP41		4.0	0.95	200	200	-1.5	10.9	2.7	0.7	8.5	10.75	5.25	0.005	MO	11
V453		4.0	0.65	250	100	-1.75	4.5	0.8	—	2.0	6.75	11.6	0.004	MO	11
VP41	(VM)	4.0	0.65	250	200	-2.7	7.7	2.0	1.3	2.0	6.5	11.5	0.0025	MO	11
6F11		6.3	0.2	250	100	-1.8	4.4	1.35	2.8	2.2	5.3	6.7	0.004	B8A	8
6F16	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.0	2.2	4.7	8.0	0.002	B8A	18
SP61		6.3	0.6	—	—	—	—	—	—	—	—	—	—	—	
SP1320		13.0	0.2	250	100	-1.5	4.4	0.9	—	2.05	10.0	8.0	0.005	B7	5
VP133	(VM)	13.0	0.2	150	150	-2.7	8.0	2.2	0.7	2.1	7.0	11.5	0.0025	MO	11
VP1320	(VM)	13.0	0.2	250	100	-1.7	5.0	1.1	2.0	2.0	9.75	8.5	0.005	B7	5
VP1321	(VM)	13.0	0.2	250	200	-2.8	7.4	1.85	1.0	2.0	9.75	8.5	0.005	B7	5
VP1322	(VM)	13.0	0.2	250	200	-2.8	7.4	1.85	1.0	2.0	7.0	9.5	0.0025	B7	6
SP181		18.0	0.2	200	200	-1.5	10.9	2.7	0.7	8.5	10.75	5.25	0.005	MO	11
10F3		22.0	0.1	200	200	-2.35	6.0	1.6	—	6.5	9.0	4.6	0.0065	B8A	8
SP2220		22.0	0.2	250	200	-3.0	4.9	4.1	0.12	2.65	13.0	8.75	0.0035	B7	5
<i>Replacement Types</i>															
1F3 } 1T4 }	(VM)	1.4*	0.05	90	45	0	1.8	0.65	0.8	0.75	3.6	7.5	0.01	B7G	2
1FD9 } 1S5 }	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.63	2.2	3.3	0.4	B7G	5
SP42		4.0	0.95	200	115	-1.25	20.0	5.0	—	8.5	10.0	7.0	0.0055	MO	11
6F1		6.3	0.35	200	200	-1.8	10.0	2.6	0.9	9.0	9.0	4.6	0.0065	B8A	17
6F12		6.3	0.3	250	250	-2.0	10.0	2.5	0.9	7.5	7.6	3.2	0.0045	B7G	21
6F13		6.3	0.35	200	200	-1.8	10.0	2.6	0.9	9.0	9.0	4.6	0.0065	B8A	8
6F14		6.3	0.35	135	135	-1.3	27.0	6.5	—	10.6	8.8	4.6	0.007	B8A	8
6F15	(VM)	6.3	0.2	250	100	-2.5	7.0	2.0	1.7	2.3	5.1	6.8	0.0035	B8A	8
6F32		6.3	0.63	200	200	-4.5	5.1	3.45	—	3.0	10.5	5.7	0.0005	MO	11
20F2		11.0	0.2	135	135	-1.3	27.0	6.5	—	10.6	8.8	4.6	0.007	B8A	8
10F9	(VM)	13.0	0.1	175	100	-2.5	7.0	2.0	1.0	2.3	5.1	6.8	0.0035	B8A	8
10F1		22.0	0.1	200	200	-1.8	10.0	2.6	0.9	9.0	9.0	4.6	0.0065	B8A	17
<i>Current Types</i>															
1F1	(VM)	1.4*	0.025	85	64	0	1.65	0.55	1.0	0.85	3.3	7.8	0.01	B7G	64
1FD1	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	1.8	2.7	0.3	B7G	65
30F27	(VM)	3.7	0.3	170	140	-1.25	13.5	1.7	—	15.0	6.3	1.8	0.027	B9A	61
6F18	(VM)	6.3	0.2	175	100	-1.3	12.0	3.5	—	4.4	5.0	4.3	0.0017	B9A	10
6F19	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10

Type	Heater		Volts			Current (mA)		r_o (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gr}	c_{sk}	c_{ga}	Type	Ref.	
FERRANTI (Continued)															
<i>Current Types</i>															
DF96/1AJ4		1.4*	0.025	85.0	64.0	0	1.65	0.55	1.0	0.75	3.3	7.8	0.01	B7G	2
DAF96/1AH5	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	1.8	2.7	0.3	B7G	5
DF97		1.4*	0.025	85	60	0	1.7	0.7	0.4	0.9	3.7	7.5	0.01	B7G	59
6AG5		6.3	0.3	250	150	-1.8	7.0	2.0	0.8	5.0	6.5	1.8	0.025	B7G	14
6AK5/EF95		6.3	0.175	180	120	-2.0	7.7	2.4	0.7	5.1	3.9	2.9	0.02	B7G	14
DP61		6.3	0.175	180	120	-2.0	7.7	2.4	0.7	5.1	4.0	2.8	0.02	B7G	14
EBF80/6N8	(VM, DD)	6.3	0.3	250	85	-2.0	5.0	1.75	1.4	2.2	4.2	4.9	0.0025	B9A	12
EF80/6BX6		6.3	0.3	170	170	-2.0	10.0	2.5	0.4	7.4	7.5	8.3	0.007	B9A	10
EF85/6BY7	(VM)	6.3	0.3	250	100	-2.0	10.0	2.4	0.5	6.0	7.2	3.7	0.007	B9A	10
EF86		6.3	0.2	250	140	-2.0	3.0	0.6	2.5	1.8	3.8	5.3	0.025	B9A	23
EF89/6DA6	(VM)	6.3	0.3	250	100	-2.0	9.0	3.0	1.0	3.6	5.5	5.1	0.002	B9A	36
UF89	(VM)	12.6	0.1	170	100	-1.0	12.0	4.4	0.3	4.4	5.5	5.1	0.002	B9A	36
UBF80	(VM, DD)	17.0	0.1	170	85	-2.0	5.0	1.75	0.9	2.2	4.2	4.9	0.0025	B9A	12
UBF89	(VM, DD)	19.0	0.1	200	100	-1.5	11.0	3.3	0.6	4.5	5.0	5.2	0.0025	B9A	12
UF85	(VM)	19.0	0.1	170	100	-2.0	9.7	2.6	0.3	5.9	6.9	3.2	0.006	B9A	10

G.E.C.

Obsolete Types

ZD17	(SD)	1.4*	0.05	90	90	0	2.7	0.5	0.6	0.63	2.2	2.4	0.2	B7G	5
KTZ41		4.0	1.5	250	250	-1.5	18.0	5.3	—	12.0	14.0	10.5	0.008	B7	30
MS4		4.0	1.0	200	70	-1.5	2.4	0.3	—	1.1	9.9	4.8	0.002	B5	2
MSP4		4.0	1.0	250	100	-1.75	3.3	1.0	—	2.4	17.2	10.0	0.01	B5	2
														B7	5
MSP41		4.0	1.0	250	240	-4.0	8.5	3.2	—	3.2	17.2	10.0	0.01	B5	2
														B7	5
VMS4	(VM)	4.0	1.0	200	80	0	14.0	3.0	—	2.4	11.3	7.7	0.002	B5	2
VMS4B	(VM)	4.0	1.0	200	80	0	8.0	1.5	—	2.9	12.0	8.1	0.0024	B5	2
KTZ63		6.3	0.3	250	100	-2.0	1.0	0.25	1.5	1.23	4.7	7.5	0.0038	IO	8
Z62		6.3	0.45	300	150	-2.0	10.0	2.7	0.75	7.5	10.9	8.0	0.02	IO	8
Z90		6.3	0.3	250	250	-2.0	10.0	3.0	—	6.3	8.2	5.4	0.007	B9G	1
Z309		6.3	0.6†	250	250	-2.0	20.0	5.25	0.5	15.0	13.0	2.5	0.007	B9A	22
Z319	(SE)	6.3	0.3	350	250*	-1.7	15.0	1.2	0.5	19.0	8.0	3.0	0.003	B9A	46
Z759		6.3	0.6				Other data, except base connections, as Type Z359							B9A	48
Z359		12.6	0.3	250	250	-2.0	20.0	5.25	0.05	15.0	13.0	2.5	0.007	B9A	47
W30	(VM)	13.0	0.3	250	250	-1.0	12.0	6.0	1.0	4.0	5.7	10.0	0.002	B7	5
W31	(VM)	13.0	0.3	200	100	-2.0	8.0	5.0	—	2.7	14.0	8.7	0.0026	B7	5

Replacement Types

Z14		1.4*	0.05	90	90	0	1.2	0.24	1.5	0.75	2.8	10.8	0.007	IO	7
W21	(VM)	2.0*	0.1	120	120	0	3.6	1.2	—	1.4	8.8	6.0	0.0045	B4	2
														B7	4
Z21		2.0*	0.1	150	120	0	2.5	0.8	—	1.7	9.7	6.1	0.005	B4	2
Z22		2.0*	0.1	150	120	0	2.5	0.8	—	1.4	9.7	11.0	0.0075	B7	4
MS4B		4.0	1.0	200	80	-1.0	3.4	1.2	0.35	3.2	12.7	5.6	0.002	B5	2
W42	(VM)	4.0	0.6	250	125	-3.0	7.6	1.9	—	1.5	5.1	10.4	0.005	B7	6
EBF80/WD709	(VM, DD)	6.3	0.3	250	85	-2.0	5.0	1.75	1.4	2.2	4.2	4.9	0.0025	B9A	12
EF80/Z719		6.3	0.3	170	170	-2.0	10.0	2.5	0.4	7.4	7.5	3.3	0.006	B9A	10
EF85	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10
EF86/Z729		6.3	0.2	250	140	-2.0	3.0	0.6	2.5	1.8	4.0	5.5	0.025	B9A	23
EF89	(VM)	6.3	0.2	250	100	-2.0	9.0	3.0	1.0	3.5	5.5	5.1	0.002	B9A	36
EP91/Z77		6.3	0.3	250	250	-2.0	10.0	2.5	7.5	7.4	7.4	3.0	0.009	B7G	21
EP92/W77	(VM)	6.3	0.2	200	200	-2.5	8.0	2.0	0.5	2.5	4.6	6.5	0.009	B7G	21
EP93/W727	(VM)	6.3	0.3	250	100	-1.0	11.0	4.2	1.0	4.4	5.5	5.0	0.0035	B7G	16
KTW61	(VM)	6.3	0.3	250	100	-3.0	8.0	2.7	0.46	2.9	7.8	10.0	0.0025	IO	8
KTW63	(VM)	6.3	0.3	250	100	-3.0	7.6	1.5	—	1.5	4.5	7.5	0.005	IO	9
W61	(VM)	6.3	0.3	250	100	-3.0	10.0	2.3	0.45	2.9	7.8	10.0	0.002	IO	8
W81	(VM)	6.3	0.3	250	100	-3.6	9.6	3.6	—	2.8	7.25	6.0	0.006	B8B	3
Z63		6.3	0.3	250	100	-2.0	1.0	0.25	1.5	1.23	4.7	7.5	0.0038	IO	8
Z66		6.3	0.63	250	250	-1.85	8.0	2.0	1.5	7.5	11.0	5.5	0.006	IO	8
Z749		6.3	0.3	170	170	-1.9	10.0	2.6	—	9.2	8.3	3.3	0.0065	B9A	10
Z329		7.3	0.3	170	170	-1.9	10.0	2.6	—	8.8	9.0	4.4	0.0073	B9A	10
W107	(VM)	12.6	0.1	250	250	-2.5	8.0	2.0	0.5	2.5	4.2	7.0	0.006	B7G	22
W76	(VM)	13.0	0.16	250	100	-3.0	7.6	1.9	0.5	1.5	4.2	12.8	0.007	IO	8
W101	(VM)	19.0	0.1				Other data as Type W81								

(Continued)

Type	Heater		Volts			Current (mA)		r_p (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gk}	c_{ak}	c_{ga}	Type	Ref.	
MARCONI (Continued)															
<i>Replacement Types (Continued)</i>															
KTZ41		4.0	1.5	250	250	-1.5	18.0	5.25	—	12.0	14.0	14.5	0.008	B7	30
MS4B		4.0	1.0	250	80	0	3.4	1.2	0.35	3.2	12.7	5.6	0.002	B5	2
MSP4		4.0	1.0	250	100	-1.75	3.4	1.0	—	2.4	17.2	10.0	0.01	B5 B7	2 5
MSP41		4.0	1.0	250	240	-4.0	9.0	3.2	—	3.2	17.2	10.0	0.01	B5 B7	2 5
W42Met	(VM)	4.0	0.6	250	100	-3.0	2.0	2.0	—	1.5	5.1	10.4	0.005	B7	6
KTZ63		6.3	0.3	260	100	-3.0	1.0	0.25	1.5	1.23	4.7	7.5	0.0038	IO	8
KTW63	(VM)	6.3	0.3	250	100	-3.0	7.6	1.5	—	1.5	4.5	7.5	0.005	IO	9
W61M	(VM)	6.3	0.3	250	80	-3.0	8.0	2.3	1.7	2.9	7.8	10.0	0.002	IO	8
Z63		6.3	0.3	250	100	-3.0	2.0	0.5	1.5	1.25	4.7	7.5	0.0038	IO	8
Z66		6.3	0.63	250	200	-1.85	8.0	2.0	1.5	7.5	11.0	5.5	0.006	IO	8
W76	(VM)	13.0	0.16	175	100	-3.0	8.5	1.7	0.5	1.5	4.2	12.8	0.007	IO	8
<i>Current Types</i>															
DAF91/ZD17	(SD)	1.4*	0.05	90	90	0	2.7	0.63	0.5	0.72	2.2	2.4	0.2	B7G	5
DAF96	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.06	—	0.17	1.8	2.7	0.3	B7G	5
DF91/W17	(VM)	1.4*	0.05	90	67.5	0	3.5	1.4	0.5	0.9	4.5	7.5	0.006	B7G	2
DF96		1.4*	0.025	85.0	64.0	0	1.65	0.55	1.0	0.75	3.3	7.8	0.01	B7G	2
6BJ6	(VM)	6.3	0.15	250	100	-1.0	9.2	3.3	1.3	3.8	4.5	5.5	0.0035	B7G	32
EBF80/WD709	(VM, DD)	6.3	0.3	250	85	-2.0	5.0	1.75	1.4	2.2	4.2	4.9	0.0025	B9A	12
EBF89	(VM, DD)	6.3	0.3	250	100	-2.0	9.0	3.0	1.0	3.8	5.0	5.0	0.002	B9A	12
EF22/W143	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.2	2.2	5.5	6.4	0.002	B8B	61
EF39/W147	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.25	2.2	5.5	7.2	0.003	IO	8
EP41/W150	(VM)	6.3	0.2	250	97	-2.5	6.0	1.7	1.0	2.2	5.0	8.0	0.002	B8A	18
EP42/Z150		6.3	0.33	250	250	-2.0	10.0	2.3	0.44	9.5	9.5	4.5	0.005	B8A	8
EP80/Z152		6.3	0.3	170	170	-2.0	10.0	2.5	0.4	7.4	7.5	3.3	0.007	B9A	10
EP80/Z719		6.3	0.3	170	170	-2.0	10.0	2.5	0.4	7.4	7.5	3.3	0.007	B9A	10
EF85/W719	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10
EF86/Z729		6.3	0.2	250	140	-2.0	3.0	0.6	2.5	2.0	4.0	5.5	0.025	B9A	23
EF89	(VM)	6.3	0.2	250	100	-2.0	9.0	3.0	1.0	3.6	5.5	5.1	0.002	B9A	36
EF91/Z77		6.3	0.3	250	250	-2.0	10.0	2.5	1.0	7.6	7.4	3.0	0.009	B7G	21
W77/9D6	(VM)	6.3	0.2	250	200	-2.5	8.0	2.1	0.5	2.5	4.6	6.5	0.009	B7G	21
W148/7H7	(VM)	6.3	0.3	250	150	-2.4	10.0	3.2	0.8	4.2	8.0	7.0	0.007	B8B	3
W149/7B7	(VM)	6.3	0.15	250	100	-3.0	8.5	1.75	0.75	1.7	5.0	6.0	0.007	B8B	3
W727/6BA6	(VM)	6.3	0.3	250	100	-1.0	11.0	4.2	1.5	4.4	5.5	5.0	0.0035	B7G	16
W729	(VM)	6.3	0.3	170	170	0	11.5	3.8	1.0	3.5	7.5	3.3	0.007	B9A	10
Z319/6351	(SE)	6.3	0.3	350	250*	—	15.5	1.2	0.5	19.0	8.0	3.0	0.003	B9A	46
W107	(VM)	12.6	0.1	200	200	-2.5	8.0	2.0	0.5	2.5	4.2	7.0	0.006	B7G	22
UAF42/WD142	(VM, SD)	12.6	0.1	200	85	-2.0	5.0	1.5	1.0	2.0	4.5	5.1	0.002	B8A	12
UF41/W142	(VM)	12.6	0.1	200	116	-3.0	7.2	2.8	1.0	2.3	5.0	7.0	0.002	B8A	24
UF89	(VM)	12.6	0.1	170	110	-2.0	12.0	3.9	0.53	3.8	5.5	5.1	0.002	B9A	36
W145	(VM)	13.0	0.1	175	100	-2.5	7.0	2.0	—	2.3	5.1	6.8	0.0035	B8A	8
UF42/Z142		21.0	0.1	170	170	-2.0	10.6	2.8	0.2	8.5	9.5	4.5	0.005	B8A	8
Z145		22.0	0.1	200	200	-1.8	10.0	2.6	—	9.0	9.0	4.6	0.0065	B8A	17

* Screen and secondary-cathode voltage.

MULLARD*Obsolete Types*

DF70		0.625*	0.025	30	30	0	0.375	0.125	0.5	0.22	1.6	2.4	0.5	B8D $\frac{1}{2}$	6
DAF70	(SD)	1.25*	0.025	67.5	67.5	0	1.0	0.25	0.4	0.44	1.8	3.0	0.15	B8D $\frac{1}{2}$	1
DF72		1.25*	0.025	67.5	67.5	0	1.7	0.5	0.75	1.0	3.2	5.1	0.01	B8D $\frac{1}{2}$	2
DF1	(VM)	1.4*	0.05	90	90	0	1.2	0.3	1.5	0.75	—	—	—	C18	26
KF35	(VM)	2.0*	0.05	120	60	-1.5	1.45	0.5	1.5	1.08	8.0	10.0	0.01	IO	85
PM12M	(VM)	2.0*	0.18	150	90	0	2.5	0.5	—	1.4	—	—	—	B4	2
SP2		2.0*	0.18	135	135	0	3.0	1.0	0.7	1.8	11.0	6.0	0.01	B7	4
VP2	(VM)	2.0*	0.18	135	135	0	3.0	1.25	0.04	1.5	10.7	6.3	0.007	B7	4
VP2B	(VM, H $\frac{1}{2}$)	2.0*	0.135	135	60	-1.5	2.0	0.95	1.3	1.4	7.9	16.3	0.002	B7	28
SP4		4.0	1.0	200	100	-2.0	3.0	1.1	2.2	2.3	—	—	—	B7	5
SP4B		4.0	0.65	250	250	-2.4	4.0	1.5	2.0	3.4	6.9	8.1	0.003	B7	6
TSP4		4.0	1.3	200	100	-2.5	8.0	1.5	—	4.7	9.6	7.5	0.01	B7	6
VP4	(VM)	4.0	1.0	200	100	-2.0	4.5	1.9	1.0	2.3	12.4	10.0	0.005	B5 B7	2 6
VP4A	(VM)	4.0	1.2	200	100	-2.0	4.25	1.8	1.4	2.5	12.5	10.2	0.006	B5 B7	2 6
EAF41	(VM, SD)	6.3	0.2	250	110	-2.0	5.0	1.5	1.4	2.0	4.0	6.5	0.002	B8A	11
EF8	(VM)	6.3	0.2	250	250	-2.5	8.0	0.2	0.45	1.8	4.9	7.8	0.007	C18	11
EF38															
EF36		6.3	0.2	250	100	-2.0	3.0	0.8	2.5	1.8	5.5	8.5	0.02	IO	8
EF37		6.3	0.2	250	100	-2.0	3.0	0.8	2.5	1.8	5.5	8.5	0.02	IO	8

‡ Flying Leads

(Continued)

Screened Tetrodes and Pentodes

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Capacitances (pF)			Base			
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{pb}	c_{ax}	c_{pa}	Type	Ref.		
MULLARD (Continued)																
<i>Obsolete Types (Continued)</i>																
78	(VM)	6.3	0.3			Other data as Type 6K7						UX6	2			
UAF41	(VM, SD)	12.6	0.1	200	85	-2.0	5.0	1.5	1.0	2.0	4.5	5.0	0.002	B8A	11	
SP13		13.0	0.2	200	100	-2.0	3.3	1.2	1.3	2.2	7.1	7.7	0.003	Ct8	15	
SP13C		13.0	0.2	200	200	-2.2	2.5	0.9	2.5	2.8	6.9	8.1	0.003	B7	6	
VP13A	(VM)	13.0	0.2	200	100	-2.0	4.0	1.4	1.0	2.2	—	—	—	Ct8	15	
VP13C	(VM)	13.0	0.2	200	200	-2.0	9.0	3.6	—	2.2	8.0	6.1	0.0023	B7	6	
<i>Replacement Types</i>																
DF64		0.62*	0.01	15	15	-0.75	0.05	0.017	1.2	0.09	1.8	2.0	0.2	B5A	3	
DF66		0.625*	0.015	22.5	22.5	-1.05	0.05	0.015	2.0	0.1	1.6	2.2	0.15	B5A	1	
DF73	(VM)	1.25*	0.025	67.5	67.5	0	1.7	0.5	0.8	0.8	2.9	5.0	0.015	B8D†	2	
1N5	(VM)	1.4*	0.05	90	90	0	1.2	0.3	1.5	0.75	3.0	10.0	0.007	IO	77	
DAF91	(SD)	1.4*	0.05	90	90	0	2.7	0.63	0.5	0.72	2.0	2.8	0.4	B7G	5	
DAF96	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	1.8	2.7	0.3	B7G	5	
DF33	(VM)	1.4*	0.05	90	90	0	1.2	0.3	1.5	0.75	3.8	9.5	0.007	IO	77	
DF91	(VM)	1.4*	0.05	90	67.5	0	3.5	1.4	0.5	0.9	3.6	7.5	0.01	B7G	2	
DF92		1.4*	0.05	90	67.5	0	3.7	1.4	0.5	1.0	3.6	7.5	0.01	B7G	2	
DF96		1.4*	0.025	85	64	0	1.65	0.55	1.0	0.85	3.3	7.9	0.01	B7G	2	
DF97		1.4*	0.025	85	62	0	1.7	0.7	0.45	0.94	3.7	7.5	0.01	B7G	59	
VP4B	(VM)	4.0	0.65	250	250	-3.0	11.5	4.25	—	2.0	8.0	5.4	0.002	B7	6	
6J7		6.3	0.3	250	100	-3.0	2.0	0.5	1.5	1.25	4.6	12.0	0.007	IO	8	
6K7	(VM)	6.3	0.3	250	125	-3.0	10.5	2.6	0.6	1.65	4.6	12.0	0.005	IO	8	
6SK7	(VM)	6.3	0.3	250	100	-3.0	9.2	2.6	0.8	2.0	6.5	7.5	0.005	IO	10	
EAF42	(VM, SD)	6.3	0.2	250	85	-2.0	5.0	1.5	1.4	2.0	4.5	5.1	0.002	B8A	12	
EBF80	(VM, DD)	6.3	0.3	250	85	-2.0	5.0	1.75	1.4	2.2	4.2	4.9	0.0025	B9A	12	
EF9	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.25	2.2	5.5	7.2	0.002	Ct8	15	
EF22	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.2	2.0	5.5	6.4	0.002	B8B	3	
EF37A		6.3	0.2	250	100	-2.0	3.0	0.8	2.5	1.8	5.5	8.5	0.02	IO	8	
EF39	(VM)	6.3	0.2	250	150	-2.5	6.0	1.7	1.25	2.2	5.5	7.2	0.003	IO	8	
EF40		6.3	0.2	250	140	-2.0	3.0	0.55	2.5	1.85	4.0	5.5	0.025	B8A	15	
EF41	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.0	2.2	4.7	8.0	0.002	B8A	7	
EF42		6.3	0.33	250	250	-2.0	10.0	2.3	0.44	9.5	9.5	4.5	0.005	B8A	8	
EF50		6.3	0.3	250	250	-2.0	10.0	3.0	1.0	6.5	8.3	5.2	0.007	B9G	1	
EF54		6.3	0.3	250	250	-1.7	10.0	1.45	0.5	7.7	6.2	4.9	0.02	B9G	2	
EF55		6.3	1.0	250	250	-4.5	40.0	5.5	0.055	12.5	15.0	12.0	0.15	B9G	1	
EF70		6.3	0.2	100	100	-2.0	3.0	2.25	0.1	2.5	4.5	4.7	0.025	B8D†	3	
EF71	(VM)	6.3	0.15	100	100	-1.2	7.2	2.2	0.26	4.5	4.4	4.0	0.015	B8D†	4	
EF72		6.3	0.15	100	100	-1.4	7.0	2.2	0.25	5.0	4.1	2.0	0.02	B8D†	4	
EF73		6.3	0.2	100	100	-2.0	7.5	2.5	0.25	5.25	5.0	3.0	0.2	B8D†	5	
EF74		6.3	0.2	100	100	-1.4	7.0	2.4	0.2	3.1	3.6	4.2	50.3	B8D†	5	
12J7		12.6	0.15			Other data as Type 6J7										
12K7	(VM)	12.6	0.15			Other data as Type 6K7										
12SK7	(VM)	12.6	0.15			Other data as Type 6SK7										
UAF42	(VM, SD)	12.6	0.1	200	85	-2.0	5.0	1.5	1.0	2.0	4.5	5.1	0.002	B8A	12	
UF41	(VM)	12.6	0.1	170	100	-2.5	6.0	1.75	1.0	2.3	5.0	7.0	0.002	B8A	7	
UBF80	(VM, DD)	17.0	0.1	170	85	-2.0	5.0	1.75	0.9	2.2	4.2	4.9	0.0025	B9A	12	
UF85		19.0	0.1	200	116	-2.3	11.4	3.1	0.35	6.1	6.9	3.2	0.007	B9A	10	
UF42		21.0	0.1	170	170	-2.0	10.0	2.8	0.2	8.5	9.5	4.5	0.005	B8A	8	
<i>Current Types</i>																
DF61		1.25*	0.025	67.5	67.5	0	1.7	0.45	1.6	0.95	3.1	3.6	0.01	B5A	3	
DF62		1.25*	0.1	45	45	0	3.0	0.8	0.05	2.0	4.0	4.0	0.01	B5A	2	
6AS6		6.3	0.175	130	120	-2.0	5.2	3.5	0.11	3.2	4.0	3.0	0.02	B7G	32	
E180F		6.3	0.3	190	160	-1.0	13.0	3.5	0.035	16.5	7.9	2.9	0.02	B9A	45	
EBF85	(DD)	6.3	0.3	12.6	12.6	††	0.45	0.14	1.0	1.0	5.0	5.2	<0.0025	B9A	12	
EBF89	(VM, DD)	6.3	0.3	250	100	-2.0	9.0	2.7	1.0	3.8	5.0	5.2	0.002	B9A	12	
EF80		6.3	0.3	170	170	-2.0	10.0	2.5	0.4	7.4	7.5	3.3	0.007	B9A	10	
EF85	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10	
EF86		6.3	0.2	250	140	-2.0	3.0	0.6	2.5	2.0	3.8	5.4	0.025	B9A	23	
EF89	(VM)	6.3	0.2	250	100	-2.0	9.0	3.0	1.0	3.5	5.5	5.1	0.002	B9A	36	
EF91		6.3	0.3	250	250	-2.0	10.0	2.5	1.0	7.6	7.0	2.0	0.008	B7G	21	
M8083 (SQ)	}															
EF92		(VM)	6.3	0.2	250	150	-0.65	8.0	2.0	0.5	2.5	4.5	7.0	0.004	B7G	21
M8161 (SQ)																
EF93		(VM)	6.3	0.3	250	100	-1.0	11.0	4.2	1.5	4.4	5.5	5.0	0.0035	B7G	16
M8101 (SQ)	}															
EF95																
M8100 (SQ)																
EF97	(VM)	6.3	0.3	12.6	6.3	—	3.0	1.1	0.15	1.9	6.5	4.0	0.015	B7G	68	
EF98		6.3	0.3	12.6	6.3	†	2.0	0.7	0.02	2.0	6.7	4.0	0.015	B7G	68	
EF183	(VM)	6.3	0.3	200	90	-2.0	12.0	4.5	0.5	12.5	9.5	3.0	<0.0055	B9A	10	
BF184		6.3	0.3	170	170	-2.0	10.0	4.1	0.33	15.6	10.0	3.0	<0.005	B9A	10	

† Flying Leads (Continued)

Screened Tetrodes and Pentodes

Type	Heater		Volts			Current (mA)		r_a (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gr}	c_{sk}	c_{gs}	Type	Ref.	
MULLARD (Continued)															
<i>Current Types (Continued)</i>															
EF730															
5636 (SQ)	(VM)	6.3	0.15	100	100	-1.0	5.3	4.1	0.11	3.2	4.0	3.4	<0.02	B8D†	8
EF731		6.3	0.15	100	100	-1.0	7.2	2.0	0.26	4.5	4.3	3.4	<0.015	B8D†	14
5899 (SQ)		6.3	0.15	100	100	-1.0	7.5	2.4	0.26	5.0	4.2	3.4	<0.015	B8D†	14
EF732		6.3	0.15	100	100	-1.0	7.5	2.4	0.26	5.0	4.2	3.4	<0.015	B8D†	14
5840 (SQ)															
HF93	(VM)	12.6	0.15												
UF86		12.6	0.1												
UF89	(VM)	12.6	0.1	170	110	-2.0	12.0	3.9	0.525	3.8	5.5	5.1	0.002	B9A	36
UBF89	(VM, DD)	19.0	0.1	200	100	-1.5	11.0	3.3	0.6	4.5	5.0	5.2	<0.0025	B9A	12
UF80		19.0	0.1	170	170	-2.0	10	2.5	0.4	7.4	7.5	<0.01	<0.0007	B9A	10
† Grid current biasing $R_{g_1} = 10M\Omega$ †† Grid current biasing $R_{g_1} = 2.2M\Omega$ ‡ Flying Leads.															

S.T.C.

<i>Current Types</i>															
5A/162D		5.5	0.26	40	40	-1.5	3.0	0.77	0.2	4.5	8.0	5.5	0.02	10	8
5A/152M		6.3	0.46	250	150	-2.1	10.0	2.0	—	7.5	10.0	5.0	0.018	B8G	3
5A/163K		6.3	0.45	200	200	-1.5	15.0	5.0	—	15.0	13.0	3.6	0.016	B9A	60
5A/170K		6.3	0.3	180	150	-1.0	13.0	3.0	—	16.5	7.9	2.9	0.03	B9A	45
5A/180M		6.3	0.45	180	150	-1.0	26.0	6.0	—	32.0	16.0	5.0	0.05	B8G	19
5B/110M		6.3	0.8	250	150	-6.0	38.0	8.0	—	6.5	11.0	6.0	0.035	B8G	3
5A/102D		7.5	0.85	180	150	-18.0	43.0	7.0	—	2.5	8.5	12.8	1.1	10	8

TUNGSRAM

<i>Obsolete Types</i>															
HP210		2.0*	0.12	150	150	-1.5	1.9	0.7	2.5	1.9	9.0	8.5	0.003	{B4 B7}	2 4
HP211	(VM)	2.0*	0.12	150	150	-0.9	2.6	0.6	2.0	1.7	—	—	0.003	{B4 B7}	2 4
SE211	(VM)	2.0*	0.12	150	75	-0.9	1.0	0.1	1.5	1.5	—	—	0.003	B4	2
SP2B		2.0*	0.05	135	135	-0.5	2.6	1.0	1.0	0.8	5.3	5.0	0.006	{B7	13
SP2BS														{C18	25
SP2D		2.0*	0.12	150	150	-0.1	1.45	0.35	2.0	1.7	—	—	0.005	B7	13
SS210		2.0*	0.12	150	75	-1.0	0.6	0.1	1.0	1.4	9.0	8.5	0.003	B4	2
VP2B	(VM)	2.0*	0.06	135	135	-0.5	2.5	0.8	2.0	0.65	5.7	5.1	0.006	{B7	13
VP2BS														{C18	25
VP2D	(VM)	2.0*	0.12	150	75	-1.5	1.3	0.6	0.9	2.0	—	—	0.005	B7	13
AS4120		4.0	1.0	200	100	-2.0	3.0	0.8	0.6	3.0	11.5	7.5	0.003	B5	2
AS4125	(VM)	4.0	1.2	200	100	-2.0	3.0	0.8	0.25	3.0	8.0	12.0	0.005	B5	2
HP4101		4.0	1.0	200	100	-2.0	3.5	0.6	2.0	3.5	10.0	12.0	0.002	{B5 B7}	2 5
HP4106	(VM)	4.0	1.0	200	100	-2.0	5.0	1.25	1.2	3.5	—	—	0.002	{B5 B7}	2 5
HP4115	(VM)	4.0	1.02	200	100	-2.0	4.3	1.5	1.4	3.2	—	—	0.002	{B5 B7}	2 5
SP4		4.0	0.65	250	100	-2.0	3.0	1.5	1.5	3.5	6.4	7.6	0.003	{B7	6
SP4S														{C18	15
SP4B		4.0	0.65	250	250	-2.0	2.9	0.8	2.0	4.0	6.4	7.6	0.003	B7	6
VP4	(VM)	4.0	0.65	250	100	-3.0	8.0	2.5	1.2	1.8	6.1	7.8	0.003	{B7	6
VP4S														{C18	15
6C6		6.3	0.3	250	100	-3.0	2.0	0.5	1.0	1.23	7.0	12.0	0.005	UX6	2
6D6	(VM)	6.3	0.3	250	100	-3.0	8.2	2.0	0.8	1.6	4.7	6.5	0.007	UX6	2
EBF2	(VM, DD)	6.3	0.2	250	250	-2.0	5.0	2.0	2.0	1.8	4.3	8.2	0.002	C18	13
EF5	(VM)	6.3	0.2	250	100	-3.0	8.0	2.5	1.2	1.7	5.4	6.9	0.003	C18	15
EF6		6.3	0.2	250	100	-2.0	3.0	1.0	1.75	2.0	5.4	6.9	0.003	C18	15
EF8	(VM)	6.3	0.2	250	250	-2.5	8.0	0.25	2.0	1.8	4.9	7.8	0.007	C18	11
EF9	(VM)	6.3	0.2	250	250	-2.5	6.0	1.7	1.5	2.2	5.0	7.0	0.003	C18	15
HP13		13.0	0.2	250	100	-1.0	8.0	2.9	1.0	3.5	—	—	—	{B7	6
HP13S														{C18	15
SP13		13.0	0.2	250	100	-2.0	3.0	1.5	2.0	2.4	6.4	7.6	0.003	{B7 C18}	6 1
SP13S		13.0	0.2	250	250	-1.5	3.5	1.5	1.5	3.5	6.4	7.6	0.003	B7	6
VP13	(VM)	13.0	0.2	200	100	-3.0	8.0	2.6	1.0	2.8	6.4	7.6	0.003	{B7	6
VP13S														{C18	15
VP13B	(VM)	13.0	0.2	250	200	-1.0	10.0	3.5	2.0	3.5	6.4	7.6	0.003	{B7 B5}	6 2
S2018		20.0	0.18	200	60	-3.0	4.0	1.2	0.3	1.2	—	—	—	{B7 B5}	5 2

(Continued)

Screened Tetrodes and Pentodes

Type	Heater		Volts			Current (mA)		r_{oa} (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{pk}	c_{sk}	c_{gs}	Type	Ref.	
TUNGSRAM (Continued)															
<i>Obsolete Types (Continued)</i>															
HP2018		20.0	0.18	200	100	-2.0	4.0	1.2	1.0	3.5	—	—	—	B5	2
HP2118	(VM)	20.0	0.18	200	100	-2.0	5.0	1.1	1.0	3.5	—	—	—	{ B5 B7	2 5
SS2018		20.0	0.18	200	100	-3.0	3.0	1.0	0.5	3.0	—	—	—	B5	2
<i>Replacement Types</i>															
VP4B	(VM)	4.0	0.65	250	250	-1.0	10.0	2.5	1.0	4.0	6.4	7.6	0.003	B7	6
6B7	}	(DD)	6.3	0.3	250	125	-3.0	10.0	2.3	0.6	1.33	3.5	9.5	0.007	{ UX7 1O
6B8															
VP13K	(VM)	13.0	0.2	200	100	-3.0	8.0	2.6	0.9	2.0	6.4	7.6	0.003	B7	6
<i>Current Types</i>															
1AH5	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	1.8	2.7	0.3	B7G	5
1AJ4		1.4*	0.025	85	64	0	1.65	0.55	1.0	0.75	3.3	7.8	0.01	B7G	2
1L4		1.4*	0.05	90	67.5	0	3.7	1.4	0.5	1.0	3.6	7.5	0.01	B7G	2
1N5GT	(VM)	1.4*	0.05	90	90	0	1.2	0.3	1.5	0.75	3.8	9.5	0.007	1O	77
1S5	(SD)	1.4*	0.05	67.5	67.5	0	1.6	0.4	0.6	0.63	2.2	2.4	0.2	B7G	5
1T4	(VM)	1.4*	0.05	90	67.5	0	3.5	1.5	0.5	0.9	3.6	7.5	0.01	B7G	2
6AC7		6.3	0.45	300	150	-2.0	10.0	2.5	1.0	9.0	11.0	5.0	0.015	1O	10
6AK5		6.3	0.175	180	120	-2.0	7.7	2.4	0.69	5.1	4.0	2.8	0.02	B7G	14
6AM6	}	6.3	0.3	250	250	-2.0	10.0	2.1	1.0	7.5	3.25	7.6	0.0034	B7G	21
EF91															
6AU6		6.3	0.3	250	150	-1.0	10.8	4.3	1.0	5.2	5.5	5.0	0.0035	B7G	16
6BA6		6.3	0.3	250	100	-1.0	11.0	4.2	1.0	4.4	5.5	5.0	0.0035	B7G	16
6BX6		6.3	0.3	170	170	-2.0	10.0	2.5	0.4	7.4	7.5	3.3	0.007	B9A	10
6BY7	(VM)	6.3	0.3	250	100	-2.0	10.0	2.5	0.5	6.0	7.2	3.7	0.007	B9A	10
6CJ5	(VM)	6.3	0.2	250	100	-2.5	6.0	1.7	1.0	2.2	4.7	8.0	0.002	B8A	7
6CT7	(VM, SD)	6.3	0.2	250	85	-2.0	5.0	1.5	1.4	2.0	4.5	5.1	0.002	B8A	12
6CQ6	(VM)	6.3	0.2	250	150	-0.65	8.0	2.0	0.5	2.5	4.5	7.0	0.004	B7G	21
6EH7	(VM)	6.3	0.3	200	90	-2.0	12.0	4.5	0.5	13.0	9.0	3.0	0.005	B9A	10
6J7		6.3	0.3	250	100	-3.0	2.0	0.5	1.0	1.23	7.0	12.0	0.005	1O	8
6N8	(VM, DD)	6.3	0.3	250	85	-2.0	5.0	1.75	1.4	2.2	4.2	4.9	0.0025	B9A	12
6SJ7		6.3	0.3	250	100	-3.0	3.0	0.8	1.0	1.65	6.0	7.0	0.005	1O	10
6SK7	(VM)	6.3	0.3	250	100	-3.0	9.2	2.6	0.8	2.0	6.5	7.5	0.005	1O	10
77		6.3	0.3	250	100	-3.0	2.3	0.5	1.0	1.25	4.7	11.0	0.007	UX6	2
78	(VM)	6.3	0.3	250	125	-3.0	10.5	2.6	0.6	1.65	4.5	11.0	0.007	UX6	2
6267		6.3	0.2	250	140	-2.0	3.0	0.6	2.5	1.8	4.0	5.5	0.025	B9A	23
EF37A		6.3	0.2	250	100	-2.0	3.0	0.8	2.5	1.8	5.5	8.5	0.02	1O	8
EF39	(VM)	6.3	0.2	250	250	-2.5	6.0	1.7	1.5	2.2	5.0	7.0	0.003	1O	8
EF50		6.3	0.3	250	250	-2.0	10.0	3.0	1.0	6.5	8.3	5.2	0.007	B9G	1
EF89	(VM)	6.3	0.2	250	100	-2.0	9.0	3.0	1.0	3.6	5.5	5.1	0.002	B9A	36
EF98		6.3	0.3	12.6	12.6	-1.0†	4.8	2.2	0.05	3.0	—	—	—	B7G	68
12AC5	(VM)	12.6	0.1	170	100	-2.5	6.0	1.75	1.0	2.2	5.0	7.0	0.002	B8A	7
12BA6		12.6	0.15	—	—	Other data as Type 6BA6				—	—	—	—	—	—
12J7		12.6	0.15	250	100	-3.0	2.0	0.5	1.0	1.23	7.0	12.0	0.005	1O	8
12K7	(VM)	12.6	0.15	250	125	-3.0	10.5	2.6	0.6	1.65	4.5	11.0	0.007	1O	8
12S7	(VM, SD)	12.6	0.1	200	85	-2.0	5.0	1.5	1.0	2.0	4.5	5.1	0.002	B8A	12
12SJ7		12.6	0.15	—	—	Other data as Type 6SJ7				—	—	—	—	—	—
12SK7		12.6	0.15	—	—	Other data as Type 6SK7				—	—	—	—	—	—
UF89	(VM)	12.6	0.1	170	110	-2.0	12.0	3.9	0.525	3.85	5.5	5.1	0.002	B9A	36
UBF80	(VM, DD)	17.0	0.1	170	85	-2.0	5.0	1.75	0.9	2.2	4.2	4.9	0.0025	B9A	12
UF85		19.0	0.1	200	116	-2.3	11.4	3.1	0.35	6.1	6.9	3.2	0.007	B9A	10

† Grid current biasing $R_g = 10M\Omega$.

AMERICAN

Current Types

1AB5		1.2*	0.05	90	90	0	3.5	0.8	0.27	1.1	2.8	4.2	0.25	B8B	39
1AD4		1.25*	0.1	45.0	45.0	0	3.0	0.8	0.5	2.0	—	—	—	Wires	—
1AD5		1.25*	0.04	67.5	67.5	0	1.85	0.75	0.7	0.74	1.8	2.8	0.01	Wires	—
1T6	(SD)	1.25*	0.04	67.5	67.5	0	1.6	0.4	0.4	0.6	—	—	—	Wires	—
1W5		1.25*	0.04	67.5	67.5	0	1.85	0.75	0.7	0.74	2.3	3.5	0.01	Wires	—
2E31		1.25*	0.05	22.5	22.5	0	0.4	0.3	—	0.5	—	—	—	Wires	—
2E32		1.25*	0.05	22.5	22.5	0	0.4	0.3	0.35	0.5	—	—	—	Wires	—
2E41	(SD)	1.25*	0.03	22.5	22.5	0	0.35	0.12	—	—	—	—	—	Wires	—
2E42	(SD)	1.25*	0.03	22.5	22.5	0	0.35	0.12	0.25	0.37	—	—	—	Wires	—
1A8	(SD, TP)	1.4*	0.11	90	90	0	1.2	0.3	0.6	0.75	3.0	10.0	0.012	1O	94
1LC5	(VM)	1.4*	0.05	90	45	0	1.15	0.2	1.5	0.78	3.2	7.0	0.007	B8B	28
1LD5	(SD)	1.4*	0.05	90	45	0	0.6	0.1	0.95	0.6	3.2	6.0	0.18	B8B	31
1LG5		1.4*	0.05	90	45	0	1.7	0.4	1.0	0.8	—	—	—	B8B	33
1LN5		1.4*	0.05	90	90	0	1.6	0.35	1.1	0.8	3.4	0.8	0.007	B8B	28

(Continued)

Type	Heater		Volts			Current (mA)		r_u (M Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen			c_{gr}	c_{sk}	c_{gt}	Type	Ref.	
AMERICAN (Continued)															
<i>Current Types (Continued)</i>															
1P5	(VM)	1.4*	0.05	90	90	0	2.3	0.7	0.8	0.75	3.0	10.0	0.007	1O	77
1SA6		1.4*	0.05	90	67.5	0	2.45	0.68	0.8	0.97	5.2	8.6	0.01	1O	89
1U4		1.4*	0.05	90	90	0	1.6	0.45	1.5	0.9	3.6	7.5	0.008	B7G	2
3D6		1.4*	0.22†	135	90	-6.0	5.7	0.7	—	2.2	7.5	6.5	0.3	B8B	32
3E6		1.4*	0.17	90	90	0	3.8	1.3	0.3	2.1	5.5	7.5	0.007	B8B	44
3SB6		1.4*	0.05	90	67.5	0	1.45	0.38	0.7	0.67	3.2	3.0	0.25	1O	78
1A4	(VM)	2.0*	0.06	180	67.5	-3.0	2.3	0.8	1.0	0.75	5.0	11.0	0.007	UX4	2
1B4		2.0*	0.06	180	67.5	-3.0	1.7	0.6	1.5	0.65	5.0	11.0	0.007	UX4	2
1E5	1O													77	
1F6	UX6													10	
1F7	(DD)	2.0*	0.06	180	67.5	-1.5	2.2	0.7	1.0	0.65	4.0	9.0	0.007	1O	79
2B7	(DD)	2.5	0.8	250	125	-3.0	9.0	2.3	0.65	1.1	3.5	9.5	0.007	UX7	2
6AB7		6.3	0.45	300	200	-3.0	12.5	3.2	0.7	5.0	8.0	5.0	0.015	1O	10
6AC7		6.3	0.45	300	150	-2.0	10.0	2.5	1.0	9.0	11.0	5.0	0.015	1O	10
6AG5		6.3	0.3	250	150	-1.8	7.0	2.0	0.8	5.0	6.5	1.8	0.025	B7G	14
6AJ5		6.3	0.175	180	75	-7.5	2.9	1.5	—	2.75	4.1	2.0	0.02	B7G	14
6AJ7		6.3	0.45	300	300	-2.0	10.0	2.5	1.0	9.0	11.0	5.0	0.015	1O	10
6AK7		6.3	0.65	300	150	-3.0	30.0	7.0	0.13	11.0	13.0	7.5	0.06	1O	11
6AS6		6.3	0.175	120	120	-2.0	5.5	3.5	—	3.5	4.0	3.0	0.02	B7G	32
6BD6		6.3	0.3	250	100	-3.0	9.0	3.5	0.7	2.0	4.3	5.0	0.004	B7G	16
6CB6		6.3	0.3	200	150	—	9.5	2.8	0.6	6.2	6.3	1.9	0.02	B7G	32
6D7		6.3	0.3	250	100	-3.0	2.0	0.5	1.0	1.23	7.0	12.0	0.005	UX7	11
6E7	(VM)	6.3	0.3	250	100	-3.0	8.2	2.0	0.8	1.6	4.7	6.5	0.007	UX7	11
6EH6		6.3	0.15	250	150	-1.0	7.4	2.9	1.4	4.6	5.4	4.4	0.004	B7G	32
6H8	(DD)	6.3	0.3	250	100	-2.0	8.5	—	0.65	2.4	—	—	—	1O	15
6M7		6.3	0.3	250	125	-2.5	10.5	2.8	0.9	3.4	—	—	—	1O	8
6M8	(SD, TP)	6.3	0.6	100	100	-3.0	8.5	—	0.2	1.9	—	—	—	1O	17
6R6		6.3	0.3	250	100	-3.0	7.0	1.7	—	1.45	—	—	—	1O	12
6S6	(VM)	6.3	0.45	250	100	-2.0	13.0	3.0	0.35	4.0	—	—	—	1O	13
6S7	(VM)	6.3	0.15	250	100	-3.0	8.5	2.0	1.0	1.75	4.4	8.0	0.008	1O	8
6SD7	(VM)	6.3	0.3	250	100	-2.0	6.0	1.9	1.0	3.6	9.0	7.5	0.0035	1O	10
6SE7		6.3	0.3	250	100	-1.5	4.5	1.5	1.1	3.4	8.0	7.5	0.005	1O	10
6SF7	(SD, VM)	6.3	0.3	250	100	-1.0	12.4	3.3	0.7	2.05	5.5	6.0	0.004	1O	71
6SH7		6.3	0.3	250	150	-1.5	10.8	4.1	0.9	4.9	8.5	7.0	0.003	1O	14
6SV7	(SD)	6.3	0.3	250	150	-1.0	7.5	2.8	0.8	3.4	6.5	6.0	0.004	1O	71
6T6		6.3	0.45	250	100	-1.0	10.0	2.0	1.0	5.5	—	—	—	1O	9
6W7		6.3	0.15	250	100	-3.0	2.0	0.5	1.5	1.23	5.0	8.5	0.007	1O	8
7A7	(VM)	6.3	0.3	250	100	-3.0	8.6	2.0	0.8	2.0	6.0	7.0	0.005	B8B	3
7AB7		6.3	0.15	250	100	-2.0	1.75	0.6	0.8	1.2	3.5	4.0	0.06	B8B	46
7AC7		6.3	0.45	300	105	—	10.0	2.5	0.5	9.0	10.0	2.0	0.03	B7G	16
7AD7		6.3	0.6	300	150	—	28.0	7.0	0.3	9.5	11.5	7.5	0.03	B8B	3
7AG7		6.3	0.15	250	250	-2.0	6.0	2.0	0.75	4.2	—	—	—	B8B	3
7AH7		6.3	0.15	250	250	—	6.8	1.9	1.0	3.3	7.0	6.5	0.005	B8B	3
7C7		6.3	0.15	250	100	-3.0	2.0	0.5	2.0	1.3	5.5	6.5	0.007	B8B	3
7E7	(DD, VM)	6.3	0.3	250	100	-3.0	7.5	1.6	0.7	1.3	4.6	4.6	0.005	B8B	13
7G7		6.3	0.45	250	100	-2.0	6.0	2.0	0.8	4.5	9.0	7.0	0.007	B8B	3
7G8	(DTT)	6.3	0.3	250	100	-2.5	4.5	0.8	0.23	2.1	4.4	2.6	0.15	B8B	18
7L7		6.3	0.3	250	100	-1.5	4.5	1.5	0.1	3.1	8.0	6.5	0.001	B8B	3
7T7		6.3	0.3	250	150	-1.0	10.8	4.1	0.9	4.9	8.0	7.0	0.005	B8B	3
7V7		6.3	0.45	300	150	-2.5	9.6	3.9	0.3	5.8	9.5	6.5	0.004	B8B	3
7W7	(VM)	6.3	0.45	300	150	-2.2	10.0	3.9	0.3	5.8	9.5	7.0	0.0025	B8B	19
12AW6		12.6	0.15				Other data as Type 6AG5								
12AW7		12.6	0.15	250	150	-1.8	7.0	2.0	0.8	5.0	6.5	1.5	0.025	B7G	32
12B7		12.6	0.15	250	100	-3.0	9.2	2.6	0.8	2.0	6.0	7.0	0.005	B8B	3
14A7	(VM)													1O	16
12B8	(TP, VM)													1O	16
12BD6		12.6	0.15				Other data as Type 6BD6								
12SF7		12.6	0.15				Other data as Type 6SF7								
12SH7		12.6	0.15				Other data as Type 6SH7								
14C7		12.6	0.15	250	100	-3.0	2.2	0.7	1.0	1.58	6.0	6.5	0.007	B8B	3
14E7	(DD)	12.6	0.15				Other data as Type 7E7								
14V7		12.6	0.22	300	150	-2.0	9.6	3.9	0.3	5.8	—	—	—	B8B	3
14W7		12.6	0.22	300	150	-2.2	10.0	3.9	0.3	5.8	9.5	7.0	0.0025	B8B	19
25B8	(TP, VM)	25.0	0.15	100	100	-3.0	7.6	2.0	0.19	2.0	5.5	10.0	0.02	1O	16
25D8	(SD, TP)	25.0	0.15	100	100	-3.0	8.5	2.7	0.2	1.9	—	—	—	1O	17
26A6		26.5	0.07	250	100	-1.8	10.5	4.0	1.0	4.0	5.9	5.0	0.0035	B7G	16

OUTPUT VALVES 1

(Triodes, tetrodes and pentodes, Class-A operation)

Type	Heater		Volts			Current (mA)		r_{ca} (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base			
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.		
BRIMAR																	
<i>Obsolete Types</i>																	
1A5	(P)	1.4*	0.05	90	90	-4.5	4.0	0.8	300,000	0.85	—	25,000	0.115	7	IO	78	
1C5	(P)	1.4	0.1†	90	67.5	-7.0	7.4	1.4	100,000	1.575	—	8,000	0.27	12	IO	78	
1S4	(BT)	1.4*	0.1	90	67.5	-7.0	7.4	1.4	100,000	1.575	—	8,000	0.27	12	B7G	4	
3D6	(BT)	1.4*	0.22†	135	90	-4.5	9.8	1.2	150,000	2.4	—	12,000	0.5	—	B8B	32	
3Q4	(BT)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	6	
3Q5	(BT)	1.4*	0.1†	90	90	-9.0	6.0	1.4	—	1.55	—	8,000	0.24	—	IO	87	
3S4	(BT)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	100,000	1.58	—	8,000	0.27	12	B7G	6	
2A3	(T)	2.5*	2.5	250	—	-45.0	60.0	—	800	5.2	750	2,500	3.5	5	UX4	1	
45	(T)	2.5*	1.5	250	—	-50.0	36.0	—	1,600	2.2	1,500	3,900	1.6	—	UX4	1	
47/47E		2.5*	1.75	250	250	-16.5	31.0	6.0	60,000	2.5	450	7,000	2.7	—	UX5	3	
7A2	(P)	4.0	1.2	250	250	-16.5	34.0	6.5	80,000	2.35	410	7,000	3.5	10	B5 B7	7 24	
7A3	(P)	4.0	2.0	250	250	-6.0	32.0	6.0	60,000	10.0	150	8,500	3.75	10	B7	24	
PA1	(T)	4.0	1.0	200	—	-10.0	40.0	—	2,000	5.0	250	4,000	1.8	10	B5	1	
PenA1	(P)	4.0*	1.0	250	250	-16.5	32.0	6.5	60,000	3.0	450	8,000	2.7	6	B5	6	
6AG6	(P)	6.3	1.2	250	250	-6.0	32.0	6.0	60,000	10.0	150	8,500	3.75	10	IO	36	
6B4	(T)	6.3*	1.0	250	—	-45.0	60.0	—	800	5.25	750	2,500	3.5	5	IO	81	
6F6	(P)	6.3	0.7	285	285	-20.0	38.0	7.0	78,000	2.55	440	7,000	4.5	9	IO	36	
6K6	(P)	6.3	0.4	315	285	-21.0	25.5	4.0	75,000	2.1	700	9,000	4.5	15	IO	36	
41/41E		6.3	0.4	250	250	-18.0	32.0	5.5	68,000	2.3	500	8,000	3.4	11	UX6	8	
42	(P)	6.3	0.7	250	250	-16.5	34.0	6.5	80,000	2.5	410	7,000	3.2	8	UX6	8	
807	(BT)	6.3	0.9	500	200	-14.5	50.0	1.6	39,000	5.7	280	6,000	11.5	12	UX5	6	
12A6	(BT)	12.6	0.15	250	250	-12.5	30.0	3.5	70,000	3.0	350	7,500	3.4	7	IO	36	
7D5	(P)	13.0	0.315	250	250	-16.5	34.0	6.5	80,000	2.5	410	7,000	3.2	8	B7	24	
7D8	(P)	13.0	0.65	250	250	-6.0	32.0	6.0	60,000	10.0	150	8,500	3.75	10	B7	24	
18	(P)	14.0	0.3	285	285	-20.0	38.0	7.0	78,000	2.55	440	7,000	4.5	9	UX6	8	
2151		14.0	0.3	250	250	-31.0	47.0	11.6	50,000	2.4	500	5,000	5.0	—	UX6	8	
25A6	(P)	25.0	0.3	160	120	-18.0	33.0	6.5	42,000	2.4	440	5,000	2.2	10	IO	36	
43	(P)	25.0	0.3	160	120	-18.0	33.0	6.5	42,000	2.4	440	5,000	2.2	10	UX6	8	
35A5	(BT)	35.0	0.15	200	110	-8.0	41.0	2.0	40,000	5.9	185	4,500	3.3	10	B8B	10	
7D3	(P)	40.0	0.2	160	120	-18.0	33.0	6.5	42,000	2.4	440	5,000	2.2	10	B7	24	
7D6	(P)	40.0	0.2	250	250	-6.0	32.0	6.0	60,000	10.0	150	8,500	3.75	10	B7	24	
50A5	(BT)	50.0	0.15	200	110	-8.0	50.0	1.5	35,000	8.25	160	3,000	4.3	10	B8B	10	
<i>Replacement Types</i>																	
3V4	(BT)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	9	
DL96/3C4	(P)	1.4*	0.05†	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9	
6AM5	}	(P)	6.3	0.2	250	250	-13.5	16.0	2.4	150,000	2.6	680	16,000	1.4	10	B7G	25
7D9																	
6CD6	(BT)	6.3	2.5	200	110	-14.0	80.0	5.3	—	—	180	1,500	4.7	13	IO	39	
6L6	(BT)	6.3	0.9	350	250	-18.0	54.0	2.5	33,000	5.2	300	4,200	11.0	15	IO	36	
6N7	(DT)	6.3	0.8	250	—	-5.0	3.0	—	23,000	1.6	1,000	30,000	0.2	—	IO	22	
6V6	(BT)	6.3	0.45	315	225	-13.0	34.0	2.2	77,000	3.75	360	8,500	5.5	12	IO	36	
7C5	(BT)	6.3	0.45	315	225	-13.0	34.0	2.2	77,000	3.75	330	8,500	5.0	11.5	B8B	10	
ECL80/6AB8	(TP)	6.3	0.3	200	200	-8.0	17.5	3.3	150,000	3.3	—	11,000	1.4	10	B9A	13	
EL41	(P)	6.3	0.7	250	250	-7.0	36.0	5.2	40,000	10.0	170	7,000	4.2	10	B8A	23	
9BW6	(BT)	9.0	0.3	—	—	—	—	—	Other data as Type 6BW6								
12K5		12.6	0.45	12.6	12.6*	-2.0 _{g2}	8.0	85*	800	7.0	—	800	0.035	10	B7G	69	
19AQ5	(BT)	19.0	0.15	—	—	—	—	—	Other data as Type 6AQ5								
25L6	}	(BT)	25.0	0.3	200	110	-8.0	50.0	7.0	30,000	9.5	160	3,000	4.3	10	IO	36
G/25L6 (SQ)																	
35L6	(BT)	35.0	0.15	200	110	-8.0	41.0	2.0	40,000	5.9	185	4,500	3.3	10	IO	36	
UL41	(P)	45.0	0.1	200	200	-14.2	45.0	8.5	24,000	8.2	250	4,300	4.2	10	B8A	7	
50C5	}	(BT)	50.0	0.15	110	110	-7.5	49.0	4.0	10,000	7.5	140	2,500	1.9	9	B7G	42
G/50C5 (SQ)																	
50CD6	(BT)	50.0	0.3	—	—	—	—	—	Other data as Type 6CD6								
50L6	(BT)	50.0	0.15	200	110	-8.0	50.0	2.0	30,000	9.5	160	3,000	4.3	10	IO	36	
<i>Current Types</i>																	
6AK6	(P)	6.3	0.15	180	180	-9.0	15.0	2.5	200,000	2.3	520	10,000	1.1	10	B7G	16	
6AQ5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	240	5,000	4.5	8	B7G	27	
6BW6	}	(BT)	6.3	0.45	315	225	-13.0	34.0	2.2	77,000	3.75	360	8,500	5.5	12	B9A	19
6061 (SQ)																	
6CH6	}	(BT)	6.3	0.75	250	250	-4.5	40.0	6.0	50,000	11.0	100	6,000	3.0	8.5	B9A	19
6132 (SQ)																	
5763	}	(BT)	6.0	0.75	300	225	-7.4	40.0	2.4	65,000	6.3	175	8,500	4.15	7.6	B9A	11
6062 (SQ)																	
ECL82/6BM8	(TP)	6.3	0.78	200	200	-16.0	35.0	7.0	20,000	6.4	—	5,600	3.5	10	B9A	37	
EL84/6BQ5	(P)	6.3	0.76	250	250	-7.3	48.0	5.5	38,000	11.0	135	5,200	5.7	10	B9A	16	

(Continued)

Type	Heater		Volts			Current (mA)		r_a (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
BRIMAR (Continued)																
<i>Current Types (Continued)</i>																
ELL80	(DP)	6.3	0.55	250	250	-9.0	24.0	4.5	80,000	6.0	160	10,000	3.0	10	B9A	68
F7001	(SQ) (BT)	6.3	0.45	120	120	—	35.0	4.0	15,000	4.8	250	2,500	1.0	9	B7G†	14
PL84	(P)	15.0	0.3	170	170	-12.5	70.0	5.0	23,000	10.0	170	2,400	5.6	10	B9A	16
PCL82	(TP)	16.0	0.3	200	200	-16.0	35.0	6.5	20,000	6.4	—	5,000	3.5	10	B9A	37
PCL85	(IP)	18.0	0.3	170	170	-15.0	41.0	2.7	25,000	7.5	—	4,000	3.4	—	B9A	66
* Space-charge grid.																
† Flying leads.																
COSSOR																
<i>Obsolete Types</i>																
3A4	(P)	1.4*	0.2†	150	90	-8.4	13.3	2.2	100,000	1.9	—	8,000	0.7	—	B7G	7
215P	(T)	2.0*	0.15	150	—	-7.5	10.0	—	4,000	2.25	—	9,000	0.15	—	B4	1
220HPT	(P)	2.0*	0.2	150	150	-4.5	8.0	1.5	—	2.5	—	10,000	0.5	8	B5	6
220P	(T)	2.0*	0.2	150	—	-7.5	11.0	—	4,000	2.25	—	9,000	0.19	5	B4	1
220PA	(T)	2.0*	0.2	150	—	-4.5	10.0	—	4,000	4.0	—	9,000	0.18	5	B4	1
220PT	(P)	2.0*	0.2	150	150	-9.0	19.0	4.0	—	2.5	—	7,500	1.0	8	B5	6
230PT	(T)	2.0*	0.3	150	150	-15.0	14.0	3.0	—	2.0	—	10,000	1.0	8	B5	6
2XP	(T)	2.0*	2.0	300	—	-36.0	50.0	—	900	7.0	700	4,000	3.15	5	B4	1
230XP	(T)	2.0*	0.3	150	—	-18.0	22.0	—	1,500	3.0	—	3,500	0.45	5	B4	1
4XP	(T)	4.0*	1.0	250	—	-28.5	48.0	—	900	7.0	600	3,000	3.0	5	B4	1
41MP	(T)	4.0	1.0	200	—	-7.5	24.0	—	2,500	7.5	320	3,000	1.0	5	B5	1
41MXP	(T)	4.0	1.0	200	—	-12.5	40.0	—	1,500	7.5	300	2,000	1.6	5	B5	1
42MPPen	(P)	4.0	2.0	250	250	-5.5	32.0	6.0	—	7.0	140	8,000	3.1	8	B7	24
42OT	(BT)	4.0	2.0	250	250	-5.5	34.0	6.0	—	7.0	140	8,000	3.1	8	B7	24
42OTDD (BT, DD)	(P)	4.0	2.0	250	250	-5.5	34.0	7.0	—	7.0	130	6,500	3.1	8	B7	9
MPPen	(P)	4.0	1.0	250	250	-16.0	30.0	6.0	—	3.5	450	10,000	3.5	8	B7	24
PT41	(P)	4.0	1.0	250	200	-12.5	30.0	6.0	—	3.0	350	8,000	2.6	8	B5	6
PT41B	(P)	4.0	1.0	400	300	-40.0	30.0	6.0	—	2.25	1,200	8,000	3.6	8	B5	6
6K6	(P)	6.3	0.4	315	285	-21.0	25.5	9.0	75,000	2.1	700	9,000	4.5	15	10	36
6L6	(BT)	6.3	0.9	300	200	-13.0	54.5	4.6	33,000	5.2	220	4,500	6.5	11	10	36
35A5	(BT)	35.0	0.15	200	110	-8.0	44.0	7.0	40,000	5.9	157	4,500	3.3	10	B8B	10
40PPA	(P)	40.0	0.2	150	150	-25.0	3.6	6.0	—	4.0	600	4,000	2.3	8	B7	24
402OT	(BT)	40.0	0.2	250	250	-12.0	32.0	32.0	—	7.0	310	8,000	2.5	8	B7	15
402P	(T)	40.0	0.2	200	—	-12.5	40.0	—	1,330	7.5	320	2,500	1.6	8	B7	23
402Pen	(P)	40.0	0.2	200	200	-6.7	40.0	—	—	7.0	137	5,500	3.1	10	B7	15
402PenA	(P)	40.0	0.2	150	150	-9.0	56.0	11.0	—	8.0	130	2,500	3.0	8	B7	15
<i>Replacement Types</i>																
IC5	(P)	1.4*	0.1	90	90	-7.5	7.8	3.5	115,000	1.55	—	8,000	0.24	10	10	78
2P	(T)	2.0	0.7	250	—	-22.0	40.0	—	1,150	7.0	—	3,000	2.0	5	B4	1
220OT	(BT)	2.0	0.2	150	150	-4.5	9.5	2.0	—	2.5	—	20,000	0.5	8	B5	6
PT10	(P)	4.0	2.0	250	250	-7.5	40.0	—	—	9.0	160	5,000	4.2	10	B7	24
6V6	(BT)	6.3	0.45	315	225	-13.0	35.0	6.0	77,000	3.75	315	8,500	5.5	12	10	36
142BT	(BT)	14.0	0.2	180	180	-8.5	29.0	3.0	58,000	3.7	265	5,500	2.0	8	10	36
CL33/332Pen	(P)	33.0	0.2	200	200	-8.5	45.0	6.0	—	8.0	167	4,500	4.0	10	10	36
<i>Current Types</i>																
DL92	(BT)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	100,000	1.58	—	8,000	0.27	12	B7G	6
DL94	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	9
DL96	(P)	1.4*	0.05	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
6C4	(T)	6.3	0.15	250	—	-8.5	10.5	—	7,700	2.2	—	—	—	—	B7G	15
7C5	(BT)	6.3	0.45	315	225	-13.0	35.0	6.0	77,000	3.75	315	8,500	5.5	12	B8B	10
807	(BT)	6.3	0.9	300	250	-14.0	83.0	8.0	20,000	6.5	155	2,850	6.7	—	UX5	6
ECL80/6AB8	(TP)	6.3	0.3	170	170	-6.7	15.0	2.8	150,000	3.2	—	11,000	1.0	10	B9A	13
ECL82	(TP)	6.3	0.78	250	250	-22.5	28.0	5.5	25,000	5.0	680	9,000	3.4	10	B9A	37
ECL83	(TP)	6.3	0.6	200	200	-1.3	27.0	4.4	65,000	5.0	—	7,500	2.5	10.5	B9A	27
EL38	(P)	6.3	1.4	275	275	-9.0	91.0	11.0	—	14.0	—	—	—	—	10	40
EL41/67PT	(P)	6.3	0.7	250	250	-7.0	36.0	5.2	40,000	10.0	170	7,000	4.2	10	B8A	23
EL42	(P)	6.3	0.2	225	225	-10.0	26.0	4.1	90,000	3.2	360	9,000	2.5	10	B8A	23
EL81	(P)	6.3	1.05	250	250	-38.5	32.0	2.4	15,000	4.6	—	—	—	—	B9A	17
EL84/6BQ5	(P)	6.3	0.76	250	250	-7.3	48.0	5.5	38,000	11.3	135	5,200	5.7	10	B9A	16
EL86	(P)	6.3	0.76	170	170	-12.5	70.0	5.0	23,000	10.0	—	2,400	5.6	10	B9A	16
EL822	(P)	6.3	0.75	250	150	-2.5	40.0	5.0	100,000	13.0	—	—	—	—	B9A	19
PCL83	(TP)	12.6	0.3	170	170	-9.5	30.0	5.0	53,000	5.5	—	5,500	2.2	10	B9A	27
PCL84	(TP)	15.0	0.3	220	220	-3.4	18.0	3.1	150,000	10.0	—	—	—	—	B9A	53
PL83	(P)	15.0	0.3	170	170	-2.3	36.0	5.0	100,000	10.0	—	—	—	—	B9A	14
PL84	(P)	15.0	0.3	250	250	-5.5	36.0	5.0	130,000	10.0	—	—	—	—	B9A	16
PCL82	(TP)	16.0	0.3	170	170	-11.5	41.0	7.5	16,000	7.5	—	3,900	3.3	10	B9A	37
PL82/16A5	(P)	16.5	0.3	170	170	-10.4	53.0	10.0	20,000	9.5	—	3,000	4.2	10	B9A	16
UL41/451PT	(P)	45.0	0.1	170	170	-10.4	53.0	10.0	20,000	9.5	140	3,000	4.2	10	B8A	23
UL84	(P)	45.0	0.1	170	170	-12.5	70.0	5.0	23,000	10.0	170	2,400	5.6	10	B9A	16
UCL82	(TP)	50.0	0.1	—	—	—	—	—	—	—	—	—	—	—	—	—

Other data as PCL82

Output Valves 1

Type	Heater		Volts			Current (mA)		r_a (Ω)	g_m (mA/V)	R_k (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
EMITRON																
<i>Current Types</i>																
3A4	(BT)	1.4*	0.2†	150	90	-8.4	13.3	2.2	100,000	1.9	—	8,000	0.7	6	B7G	7
3S4	(BT)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	100,000	1.58	—	8,000	0.27	12	B7G	6
6AM5	(P)	6.3	0.2	250	250	-13.5	16.0	2.4	130,000	2.6	730	16,000	1.4	10	B7G	25
6AQ5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	240	5,000	4.5	8	B7G	27
6L6G	(BT)	6.3	0.9	350	250	-18.0	54.0	2.5	33,000	5.2	300	4,200	10.8	15	IO	36
7C5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	250	5,000	4.5	8	B8B	10
807	(BT)	6.3	0.9	500	200	-14.5	50.0	1.6	39,000	5.7	280	6,000	11.5	12	UX5	6
3SA5	(BT)	35.0	0.15	200	110	-8.0	41.0	2.0	40,000	5.9	185	4,500	3.3	10	B8B	10

EDISWAN MAZDA

Obsolete Types

Pen141	(P)	1.4*	0.1	90	90	-9.0	5.5	1.1	—	1.4	—	10,000	0.24	12	MO	3
P215	(T)	2.0*	0.15	150	—	-13.5	5.8	—	6,500	1.1	—	11,000	0.15	5	B4	1
P220	(T)	2.0*	0.2	150	—	-7.0	5.5	—	5,600	2.2	—	10,000	0.15	5	B4	1
P220A	(T)	2.0*	0.2	150	—	-14.0	15.0	—	2,400	2.7	—	4,100	0.35	5	B4	1
PA20	(T)	2.0*	2.0	300	—	-36.0	48.0	—	1,100	5.2	750	3,000	4.2	5	B4	1
Pen24	(P)	2.0*	0.3	120	120	-3.3	5.0	1.0	—	4.0	—	15,000	0.37	16	MO	3
Pen25	(P)	2.0*	0.15	120	120	-3.6	5.0	1.0	350,000	3.0	—	14,000	0.4	16	MO	3
Pen220	(P)	2.0*	0.2	150	150	-4.9	9.0	1.6	—	2.2	—	14,000	0.6	7	B5	6
Pen220A	(P)	2.0*	0.2	150	150	-9.0	18.0	3.6	270,000	2.2	—	6,000	1.1	7	B5	6
Pen231	(P)	2.0*	0.3	120	120	-2.5	5.0	1.0	500,000	3.6	—	19,000	0.37	14	B5	6
AC/P	(T)	4.0	1.0	200	—	-13.5	17.0	—	3,700	2.7	800	5,000	0.65	7	B5	1
ACPI	(T)	4.0	1.0	200	—	-28.0	24.0	—	2,200	2.3	1,500	5,000	1.0	5	B5	1
AC/Pen	(P)	4.0	1.0	250	250	-15.5	32.0	6.0	75,000	2.7	410	7,500	3.3	7	B7	24
AC/2Pen	(P)	4.0	1.75	250	250	-5.3	32.0	6.0	110,000	8.5	140	6,700	3.5	7	B7	24
AC/2PenDD (P, DD)	4.0	2.0	250	250	-5.3	32.0	6.0	110,000	8.5	140	6,700	3.5	7	B7	9	
AC/4Pen	(BT)	4.0	1.75	250	250	-8.75	64.0	13.0	20,000	12.0	115	3,300	6.9	7	B7	24
AC/5Pen	(BT)	4.0	1.75	250	250	-8.5	40.0	7.5	—	9.4	180	5,200	4.85	7	B7	24
AC/5PenDD(BT, DD)	4.0	2.0	250	250	-8.5	40.0	7.5	—	9.4	180	5,200	4.85	7	B7	9	
PP3/250	(T)	4.0*	1.0	300	—	-37.0	48.0	—	1,100	5.2	770	3,000	4.2	5	B4	1
PP5/400	(T)	4.0*	2.0	400	—	-32.0	62.5	—	1,100	8.0	510	2,700	5.9	5	B4	1
Pen44	(BT)	4.0	2.1	260	270	-11.1	70.0	12.0	—	10.6	135	3,000	8.0	7	MO	20
Pen44	(T)	4.0	2.1	275	—	-13.6	57.0	—	1,200	11.5	240	2,400	3.2	5	MO	20
Pen45	(BT)	4.0	1.75	250	250	-8.5	40.0	8.0	40,000	8.8	180	5,000	4.5	7	MO	20
Pen45AN(SQ)	(BT)	4.0	1.75	250	250	-8.5	40.0	8.0	40,000	8.8	180	5,000	4.5	7	MO	20
Pen45	(T)	4.0	1.75	250	—	-9.8	35.0	—	1,900	9.3	280	3,500	1.7	5	MO	20
Pen45DD (BT, DD)	4.0	2.0	250	250	-8.5	40.0	8.0	40,000	8.8	180	5,000	4.5	7	MO	15	
Pen1340	(P)	13.0	0.4	240	240	-8.6	41.0	8.0	80,000	6.4	175	5,500	3.5	7	B7	24
PenDD1360 (P, DD)	13.0	0.6	250	250	-5.3	32.0	6.0	100,000	8.2	140	6,700	3.5	7	B7	9	
Pen3520	(P)	35.0	0.2	200	200	-8.0	40.0	8.0	67,000	7.3	165	4,400	3.0	7	B7	24
PP3521	(T)	35.0	0.2	200	—	-25.0	70.0	—	950	6.3	360	2,000	2.3	5	B7	16
Pen383	(BT)	38.0	0.2	160	175	-10.0	64.0	13.0	—	10.5	130	2,600	3.75	7	MO	20
Pen384	(BT)	38.0	0.2	110	110	-7.0	40.0	2.9	—	7.8	160	2,200	1.9	10	MO	20
Pen3820	(BT)	38.0	0.2	160	175	-10.0	64.0	13.0	—	10.5	130	2,600	3.75	7	B7	24
PenDD4020 (P, DD)	40.0	0.2	240	250	-7.5	43.0	8.5	—	7.8	150	4,800	3.9	7	B7	9	
Pen453DD (BT, DD)	45.0	0.2	160	175	-10.0	64.0	13.0	—	10.5	130	2,600	3.75	7	MO	15	
PenDD4021	(BT)	45.0	0.2	160	175	-10.0	64.0	13.0	—	10.5	130	2,600	3.75	7	B7	9

Replacement Types

1P10	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	—	1.57	—	8,000	0.27	12	B7G	6
3S4																
1P11	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	9
3V4																
6P1	(BT)	6.3	0.8	250	250	-8.5	40.0	7.5	40,000	8.8	180	5,000	4.2	7	IO	36
6P25	(BT)	6.3	1.1	250	250	-8.5	40.0	8.0	40,000	8.8	180	5,000	4.5	7	IO	36
20P3	(BT)	20.0	0.2	195	210	-11.5	51.0	12.7	—	7.4	180	3,700	4.5	7	IO	36
20P5	(BT)	20.0	0.2	180	150	-6.3	29.0	5.8	—	7.5	180	5,400	2.6	10	B8A	7
10P13	(BT)	40.0	0.1	180	150	-6.3	29.0	5.8	—	7.5	180	5,400	2.6	10	B8A	7
10P14	(BT)	40.0	0.1	195	210	-11.5	51.0	12.7	—	7.4	180	3,700	4.5	7	IO	36

Current Types

1P1		1.4*	0.05†	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
6P15	(P)	6.3	0.76	250	250	-7.3	48.0	5.5	38,000	11.3	135	4,000	5.4	10	B9A	16
6P17	(P)	6.3	0.2	250	250	-13.5	16.0	2.4	—	2.6	740	16,000	1.4	10	B7G	77
6PL12	(T, BT)	6.3	0.78	250	250	-22.5	28.0	5.5	25,000	5.0	680	9,000	3.4	10	B9A	37
11A1	(T)	6.3	0.95	600 Δ	—	—	—	—	—	—	—	—	—	—	B9A	62
12E1	(BT)	6.3	1.6	800***	300***	—	—	—	—	—	—	—	—	—	IO	38
S11E12 (SQ)	(BT)	6.3	1.6	800†	300†	—	—	—	—	—	—	—	—	—	IO	138
30P12	(BT)	12.6	0.3	170	180	-10.3	31.0	7.3	—	6.7	270	5,000	2.25	7	B9A	16

Type	Heater		Volts			Current (mA)		r_a (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
EDISWAN MAZDA (Continued)																
<i>Current Types (Continued)</i>																
30PL1	(T, BT)	13.0	0.3	170	180	-9.6	28.0	6.5	—	6.5	270	6,000	2.0	7	B9A	27
13E1	(BT)	13.0	2.6†	800 ϕ	300 ϕ	—	—	—	—	—	—	—	—	—	B7A	2
30P18	(P)	15.0	0.3	160	170	-12.5	70.0	5.0	23,000	10.0	—	2,200	5.2	10	B9A	16
30PL12	(T, BT)	16.0	0.3	200	200	-16.0	35.0	7.0	—	6.4	390	5,600	3.5	10	B9A	37
30PL13	(T, BT)	16.0	0.3	170	170	-13.5	45.0	9.0	—	7.5	—	—	—	10	B9A	37
30PL14	(T, BT)	16.0	0.3	170	170	-15.0	50.0	3.0	—	7.6	—	—	—	10	B9A	37
30P16	(P)	16.5	0.3	170	170	-10.4	53.0	10.0	20,000	9.0	165	3,000	4.0	10	B9A	16
10P18	(P)	45.0	0.1	160	170	-12.5	70.0	5.0	23,000	10.0	—	2,200	5.2	10	B9A	16
10PL12	(T, BT)	50.0	0.1	200	200	-16.0	35.0	7.0	—	6.4	390	5,600	3.5	10	B9A	37

*** Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=300\text{mA}$, $P_a(max)=35\text{W}$

ϕ Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=800\text{mA}$, $P_a(max)=90\text{W}$

† Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=300\text{mA}$, $P_a(max)=28\text{W}$

Δ Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=120\text{mA}$, $P_a(max)=15\text{W}$

FERRANTI*Obsolete Types*

LP2	(T)	2.0*	0.3	150	—	-18.0	22.0	—	1,500	3.0	—	3,500	0.45	5	B4	1
PTZ	(P)	10.0	0.2	250	250	-6.2	32.5	5.0	—	7.5	160	5,000	—	—	B7	15
PTA	(P)	13.0	0.3	250	250	-9.8	32.5	6.0	—	6.0	250	7,000	—	—	B7	24
PTSD	(DD, P)	26.0	0.3	250	200	-5.0	40.0	7.0	—	6.0	120	6,000	3.5	—	B7	9

Replacement Types

1A5	(P)	1.4*	0.05	90	90	-4.5	4.0	1.1	300,000	0.85	—	25,000	0.115	7	10	78
1C5	(P)	1.4*	0.1	90	90	-7.5	7.8	3.5	115,000	1.55	—	8,000	0.24	10	10	78
3Q5	(BT)	1.4*	0.1†	90	90	-4.5	9.5	1.3	80,000	2.15	—	10,000	0.27	6	10	87
3S4	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	100,000	1.58	—	8,000	0.27	12	B7G	6
PT2	(P)	2.0*	0.2	120	120	-4.5	5.3	1.1	—	2.6	—	20,000	0.35	—	B5	6
L4	(T)	4.0*	1.0	250	—	-16.0	20.0	—	3,300	3.2	800	10,000	0.5	4	B5	1
LP4	(T)	4.0*	1.0	250	—	-36.0	48.0	—	870	5.5	700	2,500	3.0	4	B4	1
PT4	(P)	4.0	2.0	250	250	-6.0	32.5	7.0	—	7.5	150	6,500	3.5	10	B7	24
PT4D	(DD, P)	4.0	2.0	250	250	-6.0	32.5	7.0	—	7.5	150	6,500	3.5	10	B7	9
6AQ5/EL90	(P)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	250	5,000	4.5	8	B7G	27
6AM5/EL91	(P)	6.3	0.2	250	250	-13.5	16.0	2.4	250,000	2.6	750	6,000	2.0	10	B7G	25
6C4	(T)	6.3	0.15	250	—	-8.5	10.5	—	7,700	2.2	—	—	—	—	B7G	15
6F6	(P)	6.3	0.7	285	285	-22.0	38.0	12.0	78,000	2.55	440	7,000	4.5	9	10	36
6K6	(P)	6.3	0.4	250	250	-18.0	32.0	5.5	68,000	2.3	470	7,600	3.4	10	10	36
6V6	(BT)	6.3	0.45	315	225	-13.0	35.0	6.0	77,000	3.75	315	8,500	5.5	12	10	36
6Y6	(BT)	6.3	1.25	200	135	-14.0	66.0	9.0	18,300	7.1	186	2,600	6.0	10	10	36
7C5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	240	5,000	4.5	8	B8B	10
807	(BT)	6.3	0.9	500	200	-14.5	50.0	1.6	39,000	5.7	280	6,000	11.5	12	UX5	6
EL41/6CK5	(P)	6.3	0.7	250	250	-7.0	36.0	5.2	40,000	10.0	170	7,000	4.2	10	B8A	23
EL42	(P)	6.3	0.2	225	225	-12.5	26.0	4.1	90,000	3.2	360	9,000	2.5	10	B8A	23
12A6	(BT)	12.6	0.15	250	250	-12.5	30.0	3.5	70,000	3.0	375	7,500	2.4	—	10	36
25L6	(BT)	25.0	0.3	200	110	-8.0	55.0	7.0	30,000	9.5	160	3,000	4.3	10	10	36
35L6	(BT)	35.0	0.15	200	110	-8.0	44.0	7.0	40,000	5.9	185	4,500	3.3	10	10	36
UL41	(P)	45.0	0.1	200	200	-14.2	45.0	8.5	24,000	8.2	—	4,300	4.2	10	B8A	23
50L6	(BT)	50.0	0.15	200	110	-8.0	55.0	7.0	30,000	9.5	160	3,000	4.3	10	10	36

Current Types

DL96/3C4	(P)	1.4*	0.05†	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
3V4/DL94	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	9
6L6	(BT)	6.3	0.9	300	200	-13.0	54.5	4.6	33,000	5.2	220	4,500	6.5	11	10	36
ECL80/6AB8	(TP)	6.3	0.3	200	200	-8.0	17.5	3.3	150,000	3.3	—	11,000	1.4	10	B9A	13
ECL82	(TP)	6.3	0.78	250	250	-22.5	28.0	5.7	25,000	5.0	680	9,000	3.4	10	B9A	37
ECL83	(TP)	6.3	0.6	200	200	-13.0	27.0	4.4	65,000	5.0	—	7,500	2.5	10.5	B9A	27
EL84/6BQ5	(P)	6.3	0.76	250	250	-7.3	48.0	5.5	38,000	11.0	135	5,200	5.7	10	B9A	16
EL85/6BN5	(P)	6.3	0.2	225	225	-10.8	26.0	4.1	90,000	3.2	360	9,000	2.8	12	B9A	26
PCL83	(TP)	12.6	0.3	200	200	-13.0	27.0	4.4	55,000	5.5	—	7,500	2.5	10	B9A	27
PCL84	(TP)	15.0	0.3	200	200	-2.9	18.0	3.1	30,000	10.0	—	—	—	—	B9A	53
PL84	(P)	15.0	0.3	170	170	-12.5	70.0	3.5	26,000	10.8	—	2,400	5.6	10	B9A	16
PCL82/16A8	(TP)	16.0	0.3	170	170	-11.5	41.0	7.5	16,000	7.5	—	—	—	—	B9A	37
UCL83	(TP)	40.0	0.1	170	170	-9.5	30.0	5.0	53,000	5.5	—	5,500	2.2	10	B9A	27
UL84	(P)	45.0	0.1	170	170	-12.5	70.0	5.0	23,000	10.0	—	2,400	5.6	10	B9A	16
UCL82	(TP)	50.0	0.1	200	200	-16.0	35.0	7.0	20,000	6.6	—	5,600	3.5	10	B9A	37

G.E.C.*Obsolete Types*

N15	(P)	1.4*	0.1†	90	90	-7.0	7.0	1.7	—	1.55	—	8,000	0.25	12	10	87
N17	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	—	1.58	—	8,000	0.27	12	B7G	6
KT21	(BT)	2.0*	0.3	150	120	-2.5	5.3	1.0	—	5.3	—	19,000	0.46	—	B5	6
KT24	(BT)	2.0*	0.2	150	150	-2.8	10.0	2.1	—	3.2	200	10,000	0.64	10	B5	6

(Continued)

Output Valves 1

Type	Heater		Volts			Current (mA)		r_p (Ω)	g_m (mA/V)	R_k (Ω)	R_f (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
G.F.C. (Continued)																
<i>Obsolete Types (Continued)</i>																
L12	(T)	2.0*	0.06	45	—	-4.0	2.2	—	0.8	2,000	10,000	0.012	6	Sm4	1	
LP2	(T)	2.0*	0.2	150	—	-4.5	10.0	—	4,170	—	7,000	0.15	—	B4	1	
KT42	(BT)	4.0	1.0	250	—	-16.5	34.0	5.5	7,000	—	7,000	3.25	—	B7	24	
KT45	(BT)	4.0	2.0	1	300	-15.0	85.0	6.3	—	6.3	160	2,200	7.25	9	B7	37
N43	(P)	4.0	2.0	250	250	-4.4	40.0	10.0	—	10.0	90	5,400	4.5	—	B7	15
PT25	(P)	4.0*	2.0	400	200	-22.0	62.5	10.6	—	4.0	330	6,000	10.0	—	B5	6
KT30	(BT)	13.0	0.3	250	250	-12.0	40.0	7.0	—	3.9	260	7,500	2.7	—	B7	24
KT35	(BT)	13.0	0.6†	200	200	-11.5	50.0	8.5	—	10.0	200	4,000	4.2	—	IO	73
KT31	(BT)	26.0	0.3	200	180	-4.0	40.0	10.6	5,500	—	80	5,500	2.5	—	B7	15
KT32	(BT)	26.0	0.3	135	135	-7.6	75.0	5.0	—	9.0	95	1,300	3.5	11	IO	36
KT33	(BT)	26.0	0.3	200	200	-13.2	60.0	10.0	—	10.0	190	3,000	5.0	—	IO	36
KT71	(BT)	48.0	0.16	175	175	-9.8	70.0	12.0	—	10.0	120	2,500	5.0	9	IO	36
<i>Replacement Types</i>																
DL94/N19	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	—	10,000	0.27	7	B7G	58	
N14	(P)	1.4*	0.1	90	90	-7.0	7.0	1.7	—	1.55	700	8,000	0.25	—	IO	78
N16	(P)	1.4*	0.1†	90	90	-4.5	9.5	1.3	125,000	—	8,000	0.27	6	IO	87	
N18/3Q4	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	—	10,000	0.27	7	B7G	6	
KT2	(BT)	2.0*	0.2	150	150	-4.5	7.5	1.7	—	2.5	—	17,000	0.5	—	B5	6
P2	(T)	2.0*	0.2	150	—	-10.0	19.0	—	2,150	—	—	4,500	0.3	—	B4	1
DN41	(P, DD)	4.0	2.3	250	200	-3.3	32.0	8.0	—	10.0	90	7,800	4.5	—	B7	9
KT41	(BT)	4.0	2.0	250	250	-4.4	50.0	8.5	—	10.5	90	6,000	4.3	8	B7	24
MKT4	(BT)	4.0	1.0	250	225	-13.5	32.0	5.0	—	3.0	365	8,000	2.5	10	B7	24
PX4	(T)	4.0*	1.0	300	—	-50.0	50.0	—	830	6.0	1,000	3,500	4.5	4	B4	1
PX25	(T)	4.0*	2.0	500	—	-50.0	50.0	—	1,265	7.5	1,000	5,500	8.5	7	B4	1
A2134	(P)	6.3	0.635	165	165	-9.3	53.0	9.0	23,200	9.5	150	3,000	4.1	10	B7G	33
ECL80	(TP)	6.3	0.3	100	—	-2.3	—	4.0	12,500	1.4	—	—	—	—	B9A	13
ECL82	(TP)	6.3	0.78	100	—	0	—	3.5	28,000	2.5	—	—	—	—	B9A	37
ECL83	(TP)	6.3	0.6	200	—	-1.5	—	2.5	34,000	2.5	—	—	—	—	B9A	27
EL84/N709	(P)	6.3	0.76	250	250	-7.5	48.0	—	38,000	11.3	120	5,000	6.0	10	B9A	16
EL90/N727	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	240	5,000	4.5	8	B7G	27
EL91/N77	(P)	6.3	0.2	250	250	-12.0	16.0	3.0	130,000	2.6	680	16,000	1.4	10	B7G	25
QA2402 (SQ)																
KT61	(BT)	6.3	0.95	250	250	-4.4	40.0	7.5	—	10.5	90	6,000	4.3	8	IO	36
KT63	(BT)	6.3	0.7	250	250	-16.5	34.0	5.5	—	2.5	420	7,000	3.0	—	IO	36
KT81	(BT)	6.3	0.95	250	250	-4.4	40.0	7.5	—	10.8	90	6,000	4.3	8	B8B	10
N78	(P)	6.3	0.64	250	250	-5.5	36.0	5.0	40,000	10.0	120	7,000	4.0	10	B7G	25
HN309	(TP)	12.6	0.3	165	165	—	32.0	6.0	45,000	4.7	220	6,000	2.1	10	B9A	27
PCL83/LN309	(TP)	12.6	0.3	165	165	-8.4	32.0	6.5	45,000	4.7	220	6,000	2.1	10	B9A	27
KT33C	(BT)	13.0	0.6†	200	200	-13.3	60.0	10.0	—	10.0	190	3,000	5.0	8	IO	73
LN319	(T, BT)	13.0	0.3	170	180	-9.6	28.0	6.5	—	6.0	270	6,000	2.0	7	B9A	27
KT76	(BT)	15.0	0.16	175	175	-13.0	35.0	6.0	—	2.5	300	5,000	2.0	4.5	IO	36
PCL84	(TP)	15.0	0.3	200	200	-2.9	18.0	3.0	130,000	10.4	—	—	—	—	B9A	53
PL83/N309	(P)	15.0	0.3	170	170	-2.5	18.0	4.2	41,000	10.0	68	5,000	1.65	7.8	B9A	14
PL84/N379	(P)	15.0	0.3	250	250	-5.5	36.0	5.0	13,000	10.0	—	—	—	—	B9A	16
PL82/N329	(P)	16.5	0.3	170	170	-10.6	50.0	9.0	20,000	9.0	180	3,000	4.0	10	B9A	16
UCL83	(TP)	38.0	0.1	200	200	-13.0	27.0	4.4	45,000	5.5	220	6,000	2.5	10	B9A	27
N108	(P)	40.0	0.1	165	165	-9.3	53.0	9.0	23,200	9.5	150	3,000	4.1	10	B7G	25
UL41	(P)	45.0	0.1	170	170	-10.4	53.0	10.0	20,000	9.5	160	3,000	4.2	10	B8A	7
KT101	(BT)	80.0	0.1	200	200	-12.5	60.0	10.0	—	10.0	180	3,000	5	12	B8B	10
	(T)															
<i>Current Types</i>																
DAF91/ZD17	(SD)	1.4*	0.05	90	90	0	2.7	0.63	1,500	0.72	—	—	—	—	B7G	5
DAF96/ZD25	(SD)	1.4*	0.025	67.5	67.5	-1.5	0.17	0.055	—	0.17	—	—	—	—	B7G	5
DL96/N25	(P)	1.4	0.05	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
KT66	(BT)	6.3	1.27	250	250	-15.0	85.0	6.3	22,500	6.3	160	2,200	7.25	9	IO	36
KT88	(BT)	6.3	1.6	300	300	-20.0	130.0	13.5	—	12.0	11,150	3,500	—	7	IO	A
N369	(BT)	12.6	0.3	170	180	-10.3	31.0	7.3	—	6.7	270	5,000	2.25	7	B9A	16
N308	(BT)	25.0	0.3	400	250	—	—	—	—	—	—	—	—	—	IO	129
N118	(BT)	40.0	0.1	180	150	-6.3	29.0	5.8	—	7.5	180	5,400	2.6	10	B8A	7
UL84/N119	(P)	45.0	0.1	170	170	-12.5	70.0	5.0	230,000	10.0	170	2,200	5.2	10	B9A	16
UCL82/LN119	(TP)	50.0	0.1	100	—	0	—	3.5	28,000	2.5	—	—	—	—	B9A	37

† Maximum anode voltage, 8,000 peak.

HIVAC

Obsolete Types

XHP1.5V	(DT)	1.5*	0.16 (1) (2)	50	—	-4.5	1.75	—	7,250	0.72	—	8,500	0.0062	—	Sm5	3
XFY11	(P)	1.25*	0.025	22.5	22.5	0	0.45	—	50,000	0.50	—	—	—	—	—	—
XFY12	(P)	1.25*	0.025	22.5	22.5	-0.5	0.25	0.08	—	0.37	—	175,000	0.00175	—	B5A	1

(Continued)

Type	Heater		Volts			Current (mA)		r_{e1} (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
EDISWAN MAZDA (Continued)																
<i>Current Types (Continued)</i>																
30PL1	(T, BT)	13.0	0.3	170	180	-9.6	28.0	6.5	—	6.5	270	6,000	2.0	7	B9A	27
13E1	(BT)	13.0	2.6†	800 ϕ	300 ϕ	—	—	—	—	—	—	—	—	—	B7A	2
30P18	(P)	15.0	0.3	160	170	-12.5	70.0	5.0	23,000	10.0	—	2,200	5.2	10	B9A	16
30PL12	(T, BT)	16.0	0.3	200	200	-16.0	35.0	7.0	—	6.4	390	5,600	3.5	10	B9A	37
30PL13	(T, BT)	16.0	0.3	170	170	-13.5	45.0	9.0	—	7.5	—	—	—	10	B9A	37
30PL14	(T, BT)	16.0	0.3	170	170	-15.0	50.0	3.0	—	7.6	—	—	—	10	B9A	37
30P16	(P)	16.5	0.3	170	170	-10.4	53.0	10.0	20,000	9.0	165	3,000	4.0	10	B9A	16
10P18	(P)	45.0	0.1	160	170	-12.5	70.0	5.0	23,000	10.0	—	2,200	5.2	10	B9A	16
10PL12	(T, BT)	50.0	0.1	200	200	-16.0	35.0	7.0	—	6.4	390	5,600	3.5	10	B9A	37

*** Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=300\text{mA}$, $P_{a(max)}=35\text{W}$

ϕ Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=800\text{mA}$, $P_{a(max)}=90\text{W}$

† Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=300\text{mA}$, $P_{a(max)}=28\text{W}$

Δ Maximum Values for use in stabilized h.t. supply circuits. $I_{K(max)}=120\text{mA}$, $P_{a(max)}=15\text{W}$

FERRANTI*Obsolete Types*

LP2	(T)	2.0*	0.3	150	—	-18.0	22.0	—	1,500	3.0	—	3,500	0.45	5	B4	1
PTZ	(P)	10.0	0.2	250	250	-6.2	32.5	5.0	—	7.5	160	5,000	—	—	B7	15
PTA	(P)	13.0	0.3	250	250	-9.8	32.5	6.0	—	6.0	250	7,000	—	—	B7	24
PTSD	(DD, P)	26.0	0.3	250	200	-5.0	40.0	7.0	—	6.0	120	6,000	3.5	—	B7	9

Replacement Types

1A5	(P)	1.4*	0.05	90	90	-4.5	4.0	1.1	300,000	0.85	—	25,000	0.115	7	10	78
1C5	(P)	1.4*	0.1	90	90	-7.5	7.8	3.5	115,000	1.55	—	8,000	0.24	10	10	78
3Q5	(BT)	1.4*	0.1†	90	90	-4.5	9.5	1.3	80,000	2.15	—	10,000	0.27	6	10	87
3S4	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	100,000	1.58	—	8,000	0.27	12	B7G	6
PT2	(P)	2.0*	0.2	120	120	-4.5	5.3	1.1	—	2.6	—	20,000	0.35	—	B5	6
L4	(T)	4.0*	1.0	250	—	-16.0	20.0	—	3,300	3.2	800	10,000	0.5	4	B5	1
LP4	(T)	4.0*	1.0	250	—	-36.0	48.0	—	870	5.5	700	2,500	3.0	4	B4	1
PT4	(P)	4.0	2.0	250	250	-6.0	32.5	7.0	—	7.5	150	6,500	3.5	10	B7	24
PT4D	(DD, P)	4.0	2.0	250	250	-6.0	32.5	7.0	—	7.5	150	6,500	3.5	10	B7	9
6AQ5/EL90	(P)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	250	5,000	4.5	8	B7G	27
6AM5/EL91	(P)	6.3	0.2	250	250	-13.5	16.0	2.4	250,000	2.6	750	6,000	2.0	10	B7G	25
6C4	(T)	6.3	0.15	250	—	-8.5	10.5	—	7,700	2.2	—	—	—	—	B7G	15
6F6	(P)	6.3	0.7	285	285	-22.0	38.0	12.0	78,000	2.55	440	7,000	4.5	9	10	36
6K6	(P)	6.3	0.4	250	250	-18.0	32.0	5.5	68,000	2.3	470	7,600	3.4	10	10	36
6V6	(BT)	6.3	0.45	315	225	-13.0	35.0	6.0	77,000	3.75	315	8,500	5.5	12	10	36
6Y6	(BT)	6.3	1.25	200	135	-14.0	66.0	9.0	18,300	7.1	186	2,600	6.0	10	10	36
7C5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	240	5,000	4.5	8	B8B	10
807	(BT)	6.3	0.9	500	200	-14.5	50.0	1.6	39,000	5.7	280	6,000	11.5	12	UX5	6
EL41/6CK5	(P)	6.3	0.7	250	250	-7.0	36.0	5.2	40,000	10.0	170	7,000	4.2	10	B8A	23
EL42	(P)	6.3	0.2	225	225	-12.5	26.0	4.1	90,000	3.2	360	9,000	2.5	10	B8A	23
12A6	(BT)	12.6	0.15	250	250	-12.5	30.0	3.5	70,000	3.0	375	7,500	2.4	—	10	36
25L6	(BT)	25.0	0.3	200	110	-8.0	55.0	7.0	30,000	9.5	160	3,000	4.3	10	10	36
35L6	(BT)	35.0	0.15	200	110	-8.0	44.0	7.0	40,000	5.9	185	4,500	3.3	10	10	36
UL41	(P)	45.0	0.1	200	200	-14.2	45.0	8.5	24,000	8.2	—	4,300	4.2	10	B8A	23
50L6	(BT)	50.0	0.15	200	110	-8.0	55.0	7.0	30,000	9.5	160	3,000	4.3	10	10	36

Current Types

DL96/3C4	(P)	1.4*	0.05†	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
3V4/DL94	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	9
6L6	(BT)	6.3	0.9	300	200	-13.0	54.5	4.6	33,000	5.2	220	4,500	6.5	11	10	36
ECL80/6AB8	(TP)	6.3	0.3	200	200	-8.0	17.5	3.3	150,000	3.3	—	11,000	1.4	10	B9A	13
ECL82	(TP)	6.3	0.78	250	250	-22.5	28.0	5.7	25,000	5.0	680	9,000	3.4	10	B9A	37
ECL83	(TP)	6.3	0.6	200	200	-13.0	27.0	4.4	65,000	5.0	—	7,500	2.5	10.5	B9A	27
EL84/6BQ5	(P)	6.3	0.76	250	250	-7.3	48.0	5.5	38,000	11.0	135	5,200	5.7	10	B9A	16
EL85/6BN5	(P)	6.3	0.2	225	225	-10.8	26.0	4.1	90,000	3.2	360	9,000	2.8	12	B9A	26
PCL83	(TP)	12.6	0.3	200	200	-13.0	27.0	4.4	55,000	5.5	—	7,500	2.5	10	B9A	27
PCL84	(TP)	15.0	0.3	200	200	-2.9	18.0	3.1	30,000	10.0	—	—	—	—	B9A	53
PL84	(P)	15.0	0.3	170	170	-12.5	70.0	3.5	26,000	10.8	—	2,400	5.6	10	B9A	16
PCL82/16A8	(TP)	16.0	0.3	170	170	-11.5	41.0	7.5	16,000	7.5	—	—	—	—	B9A	37
UCL83	(TP)	40.0	0.1	170	170	-9.5	30.0	5.0	53,000	5.5	—	5,500	2.2	10	B9A	27
UL84	(P)	45.0	0.1	170	170	-12.5	70.0	5.0	23,000	10.0	—	2,400	5.6	10	B9A	16
UCL82	(TP)	50.0	0.1	200	200	-16.0	35.0	7.0	20,000	6.6	—	5,600	3.5	10	B9A	37

G.E.C.*Obsolete Types*

N15	(P)	1.4*	0.1†	90	90	-7.0	7.0	1.7	—	1.55	—	8,000	0.25	12	10	87
N17	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	—	1.58	—	8,000	0.27	12	B7G	6
KT21	(BT)	2.0*	0.3	150	120	-2.5	5.3	1.0	—	5.3	—	19,000	0.46	—	B5	6
KT24	(BT)	2.0*	0.2	150	150	-2.8	10.0	2.1	—	3.2	200	10,000	0.64	10	B5	6

(Continued)

Type	Heater		Volts			Current (mA)		r_a (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
HIVAC (Continued)																
<i>Obsolete Types (Continued)</i>																
XFY21	(BT)	1.25*	0.0125	22.5	22.5	0	0.38	0.095	—	0.41	—	1,000,000	0.0018	—	B5A	1
XFY23	(BT)	1.25*	0.0175	22.5	22.5	-2.0	0.4	0.09	—	0.34	—	50,000	0.00375	—	B5A	1
XY1.4B	(P)	1.25*	0.025	45	45	-4.5	1.5	0.45	50,000	0.6	—	30,000	0.0275	—	B5A	1
XY1.4C	(P)	1.25*	0.025	45	45	-1.5	0.5	0.10	250,000	0.5	—	100,000	0.0065	—	B5A	1
XFY10	(P)	1.25*	0.025	22.5	22.5	-1.25	0.5	0.2	—	0.35	—	50,000	0.003	—	B5A	1
XY1.4A	(P)	1.4*	0.032	45	45	-4.5	1.75	0.75	40,000	0.55	—	30,000	0.010	—	B5A	1
XPI.5V	(T)	1.5*	0.08	50	—	-4.5	1.75	—	7,250	0.72	—	8,500	0.0067	—	Sm4	1
XY1.5V	(P)	1.5*	0.16	45	45	-1.5	1.75	0.35	66,000	1.0	—	27,000	0.014	—	Sm5	1
P215	(T)	2.0*	0.15	150	—	-12.0	8.0	—	3,600	2.2	—	10,000	0.15	—	B4	1
P220	(T)	2.0*	0.2	150	—	-7.5	6.0	—	4,750	3.0	—	9,000	0.18	—	B4	1
PP220	(T)	2.0*	0.2	150	—	-12.0	12.5	—	2,300	3.0	—	5,000	0.25	—	B4	1
PX230	(T)	2.0*	0.3	150	—	-15.0	17.5	—	1,850	3.5	—	4,000	0.45	—	B4	1
XP2.0V	(T)	2.0*	0.08	50	—	-3.0	2.0	—	6,000	1.0	—	7,200	0.0052	—	Sm4	1
XY2.0V	(P)	2.0*	0.16	50	50	-2.0	1.75	0.4	60,000	1.4	—	25,000	0.020	—	Sm5	1
Y220	(TT)	2.0*	0.2	150	150	-4.5	10.5	1.3	—	—	—	11,500	0.5	—	B4	7
Y230	(TT)	2.0*	0.3	150	150	-3.0	7.0	1.0	—	—	—	20,000	0.4	—	B5	6
Z220	(TT)	2.0*	0.2	150	150	-6.0	18.0	2.1	—	—	—	7,500	1.0	—	B4	7
ACL	(T)	4.0	1.0	250	—	-13.5	17.0	—	2,350	4.25	760	6,300	0.67	—	B5	1
ACQ	(TT)	4.0	1.35	375	250	-22.0	57.0	2.5	—	—	370	4,000	11.5	—	B7	24
ACY	(TT)	4.0	1.0	250	250	-10.0	32.0	4.3	—	—	30	6,500	3.0	—	B5	7
ACZ	(TT)	4.0	2.0	250	250	-5.5	32.0	4.3	—	—	160	6,500	3.0	—	B7	24
ACZDD	(DD, TT)	4.0	2.0	250	250	-5.5	32.0	4.3	—	—	160	6,500	3.0	—	B7	9
FY	(TT)	4.0*	1.0	250	250	-10.0	32.0	6.0	—	—	250	6,000	3.0	—	B5	6
PXS	(T)	4.0*	2.0	400	—	-34.0	62.5	—	1,480	6.5	530	3,000	5.75	—	B4	1
6C4	(T)	6.3	0.15	250	—	-8.5	10.5	—	7,700	2.2	—	—	—	—	B7G	15
Y13	(TT)	13.0	0.3	250	250	-22.0	35.0	4.5	—	—	550	4,000	3.0	—	B7	24
Z26	(TT)	26.0	0.3	250	250	-5.5	32.0	4.3	—	—	160	6,500	3.0	—	B7	24
<i>Current Types</i>																
XFY14	(P)	1.25*	0.05	67.5	67.5	-6.5	3.1	0.95	—	0.65	—	—	0.07	—	B5A	1
XFY15	(P)	1.25*	0.02	67.5	67.5	-6.5	3.1	0.95	—	0.65	—	—	0.07	—	B5A	1
XFY31	(P)	1.25*	0.0125	22.5	22.5	0	0.38	0.095	—	0.41	—	100,000	0.0018	—	B5A	1
XFY32	(P)	1.25*	0.0125	16.25	16.25	0	0.44	0.1	—	0.35	—	100,000	0.0018	—	B5A	1
XFY33	(P)	1.25*	0.0175	15	15	-1.2	0.2	0.05	—	0.23	—	75,000	0.001	—	B5A	1
XFY41	(P)	1.25*	0.01	22.5	22.5	0	0.38	0.095	—	0.41	—	100,000	0.0018	—	B5A	1
XFY43	(P)	1.25*	0.01	15	15	-1.2	0.2	0.05	—	0.23	—	75,000	0.001	—	B5A	1
XFY51	(P)	1.25*	0.01	22.5	22.5	0	0.32	0.09	—	0.32	—	80,000	0.0023	—	B5A	1
XFY53	(P)	1.25*	0.01	22.5	22.5	-3.0	0.45	0.17	—	0.34	—	40,000	0.00375	—	B5A	1
XFY54	(P)	1.25*	0.01	22.5	22.5	-2.0	0.34	0.08	—	0.28	—	30,000	0.00275	—	B5A	1
MARCONI																
<i>Obsolete Types</i>																
N14	(P)	1.4*	0.1	90	90	-7.0	7.0	1.7	—	1.55	700	8,000	0.25	—	IO	78
N15	(P)	1.4*	0.1†	90	90	-7.0	7.0	1.7	—	1.55	—	8,000	0.25	12	IO	87
N16	(P)	1.4*	0.1†	90	90	-4.5	9.5	1.3	—	2.1	—	8,000	0.27	6	IO	87
KT21	(BT)	2.0*	0.3	150	120	-2.5	5.3	1.0	—	5.3	—	19,000	0.46	—	B5	6
KT24	(BT)	2.0*	0.2	150	150	-2.8	10.0	2.1	—	3.2	200	10,000	0.64	10	B5	6
KT42	(BT)	4.0	1.0	250	250	-16.5	34.0	5.5	—	2.5	420	7,000	3.25	—	B7	24
KT45	(BT)	4.0	2.0	†	300	-15.0	85.0	6.3	—	6.3	160	2,200	7.25	9	B7	37
N43	(P)	4.0	2.0	250	250	-4.4	40.0	10.0	—	10.0	90	5,400	4.5	—	B7	15
PT25	(P)	4.0*	2.0	400	200	-22.0	62.5	10.6	—	4.0	330	6,000	10.0	—	B5	6
KT81	(BT)	6.3	0.95	250	250	-4.4	40.0	7.5	—	10.8	90	6,000	4.3	8	B8B	10
KT30	(BT)	13.0	0.3	250	250	-12.0	40.0	7.0	—	3.9	260	7,500	2.7	—	B7	24
KT35	(BT)	13.0	0.6†	200	200	-11.5	50.0	8.5	—	10.0	200	4,000	4.2	—	IO	73
KT31	(BT)	26.0	0.3	200	180	-4.0	40.0	10.6	—	10.0	80	5,500	2.5	—	B7	15
<i>Replacement Types</i>																
DL92/N17	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	—	1.425	—	8,000	0.27	12	B7G	6
KT2	(BT)	2.0*	0.2	150	150	-4.5	7.5	1.7	—	2.5	—	17,000	0.5	—	B5	6
LP2	(T)	2.0*	0.2	100	—	-3.0	5.0	—	4,170	3.6	—	7,000	0.15	—	B4	1
P2	(T)	2.0*	0.2	100	—	-6.0	11.0	—	2,150	3.5	—	4,500	0.3	—	B4	11
DA30	(T)	4.0*	2.0	500	—	-144.0	60.0	—	—	3.85	—	6,000	11.0	5.5	B4	1
DN41	(P, DD)	4.0	2.3	250	200	-3.3	32.0	8.0	—	10.0	90	7,800	4.5	—	B7	9
KT41	(BT)	4.0	2.0	250	250	-4.4	40.0	8.5	—	10.5	90	6,000	4.2	8	B7	24
MKT4	(BT)	4.0	1.0	200	200	-10.5	32.0	4.0	—	3.0	365	8,000	2.5	10	B7	24

(Continued)

Output Valves 1

Type	Heater		Volts			Current (mA)		r_p (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Grid	Screen	Anode	Screen							Type	Ref.	
MARCONI (Continued)																
<i>Replacement Types (Continued)</i>																
PX25	(T)	4.0*	2.0	400	—	-31.0	62.5	—	1,265	7.5	1,000	5,500	6.0	7	B4	1
KT63	(BT)	6.3	0.7	250	250	-16.5	34.0	5.5	—	2.5	420	7,000	4.8	—	IO	36
KT76	(BT)	15.0	0.16	175	175	-12.5	33.0	6.0	—	2.5	300	5,000	2.0	4.5	IO	36
KT32	(BT)	26.0	0.3	110	110	-7.0	50.0	4.0	—	9.0	95	1,300	2.3	11	IO	36
KT71	(BT)	48.0	0.16	175	175	-9.8	70.0	12.0	—	10.0	120	2,500	5.0	9	IO	36
KT101	f (BT)	80.0	0.1	175	175	-9.8	70.0	12.0	—	10.0	180	3,000	3.8	12	B8B	10
	l (T)	80.0	0.1	175	—	-7.5	120.0	—	—	11.5	—	—	—	—	B8B	10
<i>Current Types</i>																
DL94/N19	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	58
DL96	(P)	1.4*	0.05	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
N18/3Q4	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	6
KT44/45	(BT)	4.0	2.0	250	250	-25.0	85.0	20.0	—	6.3	—	2,200	7.5	9	B7	37
PX4	(T)	4.0*	1.0	300	—	-45.0	50.0	—	830	6.0	1,000	3,500	4.5	4	B4	1
EBL21/DN143(P, DD)		6.3	0.8	250	250	-6.0	36.0	4.5	70,000	9.0	120	5,700	4.5	10	B8B	62
ECL80/LN152 (TP)		6.3	0.3	200	200	-8.0	17.5	3.3	150,000	3.3	—	11,000	1.4	10	B9A	13
EL33/N147	(P)	6.3	0.9	250	250	-6.0	36.0	4.0	50,000	9.0	150	7,000	4.0	10	IO	36
EL41/N150	(P)	6.3	0.7	250	250	-7.0	36.0	5.2	40,000	10.0	—	7,000	4.2	10	B8A	23
EL42/N151	(P)	6.3	0.2	225	225	-11.0	26.0	4.1	90,000	3.2	360	9,000	2.5	10	B8A	23
EL84/N709	(P)	6.3	0.76	250	250	-7.3	48.0	—	38,000	11.3	120	5,000	6.0	10	B9A	16
KT61	(BT)	6.3	0.95	250	250	-4.4	40.0	7.5	—	10.5	90	6,000	4.3	8	IO	36
KT66	(BT)	6.3	1.27	250	250	-15.0	85.0	6.3	—	6.3	160	2,200	7.25	9	IO	36
N144	(P)	6.3	0.2	250	250	-13.8	16.0	2.4	130,000	2.6	680	16,000	1.4	10	B7G	63
N148/7C5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	77,000	4.1	360	8,500	—	12	B8B	63
N155	(P)	6.3	0.2	225	225	-10.8	26.0	4.1	90,000	3.2	—	9,000	2.6	—	B9A	26
N727/6AQ5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	240	5,000	4.5	8	B7G	27
HN309	(TP)	12.6	0.3	165	165	-9.0	30.0	6.5	45,000	4.7	220	6,000	—	10	B9A	27
PCL83/LN309	(TP)	12.6	0.3	200	200	-13.0	27.0	4.4	45,000	5.5	220	6,000	2.5	10	B9A	27
KT33C	(BT)	13.0	0.6†	175	175	-7.0	44.0	8.0	—	10.0	190	3,000	4.0	—	IO	73
N37	(P)	13.0	0.3	165	165	-9.0	53.0	9.0	23,200	9.5	330	6,000	4.1	10	B7G	25
PL83/N309	(P)	15.0	0.3	200	200	-3.5	36.0	5.0	41,000	10.0	68	5,000	1.1	7.8	B9A	14
PL82/N329	(P)	16.5	0.3	200	200	-14.2	45.0	8.5	20,000	7.6	180	3,000	4.2	10	B9A	16
N108	(P)	40.0	0.1	165	165	-9.0	53.0	9.0	23,200	9.5	150	3,000	4.1	10	B7G	25
N145	(P)	40.0	0.1	180	150	-6.3	29.0	5.8	—	7.5	180	5,800	2.6	10	B8A	7
UL41/N142	(P)	45.0	0.1	200	200	-14.2	45.0	8.5	20,000	8.2	140	3,000	4.2	10	B8A	23

† Maximum anode voltage, 8,000 peak.

MULLARD

Obsolete Types

DL66	(P)	1.25*	0.015	22.5	22.5	-1.4	0.3	0.075	300,000	0.35	—	75,000	0.0027	10	B5A		
DL71	(P)	1.25*	0.025	45	45	-1.25	0.6	0.15	350,000	0.55	—	100,000	0.0063	10	B8D†	6	
DL72	(P)	1.25*	0.025	45	45	-4.5	1.25	0.4	170,000	0.55	2,700	30,000	0.02	10	B8D†	6	
DL75	(P)	1.25*	0.025	90	90	-2.5	1.75	0.4	450,000	0.85	—	60,000	0.05	10	B8D†	6	
DL2	(P)	1.4*	0.1	90	90	-7.5	7.5	1.6	115,000	1.55	—	8,000	0.24	10	C18	25	
ACO42	(T)	2.0*	2.0	300	—	-38.0	50.0	—	1,200	5.0	760	2,300	3.5	5	B4	1	
KL35	(P)	2.0*	0.15	135	135	-4.5	5.6	—	150,000	2.2	—	19,000	0.34	10	IO	78	
PM2	(T)	2.0*	0.2	100	—	-7.0	4.0	—	7,000	0.9	—	9,000	—	—	B4	1	
PM2A	(T)	2.0*	0.2	135	—	-6.0	5.0	—	6,000	2.0	—	7,000	0.15	5	B4	1	
PM22	(P)	2.0*	0.2	150	150	-10.0	15.0	4.0	—	1.3	—	8,000	—	—	B5	6	
PM22A/5	(P)	2.0*	0.15	135	135	-4.5	5.6	—	150,000	2.2	—	19,000	0.34	10	B5	6	
PM22D	(P)	2.0*	0.3	135	135	-2.4	5.0	0.8	—	3.0	—	24,000	0.3	10	B5	6	
PM202	(T)	2.0*	0.2	150	—	-15.0	14.0	—	2,000	3.5	—	3,700	—	—	B4	1	
ACO44	(T)	4.0*	1.0	300	—	-38.0	50.0	—	1,200	5.0	760	2,300	3.5	5	B4	1	
DO24	(T)	4.0*	1.85	400	—	-40.0	63.0	—	1,070	7.5	630	3,200	7.1	4	B4	1	
DO26	(T)	4.0*	2.0	400	—	-92.0	63.0	—	950	3.8	1,500	3,000	7.5	10	B4	1	
DO30	(T)	4.0*	2.0	500	—	-134.0	60.0	—	580	6.9	2,250	6,000	11.0	—	B4	1	
Pen4VA	(P)	4.0	1.35	250	250	—	36.0	3.0	40,000	2.8	500	6,000	3.8	10	{ B5 B7	7 24	
Pen428	(P)	4.0	2.1	250	250	—	72.0	—	—	—	150	3,200	8.0	10	B7	24	
PM24A	(P)	4.0*	0.275	300	200	-22.5	20.0	3.5	—	1.7	—	10,000	2.5	10	B5	6	
PM24M	(P)	4.0*	1.1	2.0	250	-17.0	30.0	5.6	43,000	3.0	540	7,000	2.8	—	B5	6	
6L6	(BT)	6.3	0.9	3.0	250	-18.0	54.0	2.5	33,000	5.2	330	4,200	10.8	15	IO	36	
EBL1	(P, DD)	6.3	1.2	250	250	-6.0	36.0	5.0	55,000	9.5	146	7,000	4.3	10	C18	13	
EC31	(T)	6.3	0.65	250	—	-16.0	20.0	—	3,300	3.2	800	10,000	0.5	5	IO	20	
EL3	f (P)	6.3	0.9	250	250	-6.0	36.0	4.0	50,000	9.0	150	7,000	4.0	10	C18	12	
	l (T)	6.3	0.9	250	—	-8.5	20.0	—	3,000	6.5	425	7,000	11.0	5	C18	12	
EL6	}	(P)	6.3	1.2	250	250	-7.0	72.0	8.0	20,000	14.5	90	3,500	8.0	10	{ C18 IO	{ 12 36

† Flying Leads.

(Continued)

Type	Heater		Volts			Current (mA)		r_e (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
HIVAC (Continued)																
<i>Obsolete Types (Continued)</i>																
XFY21	(BT)	1.25*	0.0125	22.5	22.5	0	0.38	0.095	—	0.41	—	1,000,000	0.0018	—	B5A	1
XFY23	(BT)	1.25*	0.0175	22.5	22.5	-2.0	0.4	0.09	—	0.34	—	50,000	0.00375	—	B5A	1
XY1.4B	(P)	1.25*	0.025	45	45	-4.5	1.5	0.45	50,000	0.6	—	30,000	0.0275	—	B5A	1
XY1.4C	(P)	1.25*	0.025	45	45	-1.5	0.5	0.10	250,000	0.5	—	100,000	0.0065	—	B5A	1
XFY10	(P)	1.25*	0.025	22.5	22.5	-1.25	0.5	0.2	—	0.35	—	50,000	0.003	—	B5A	1
XY1.4A	(P)	1.4*	0.032	45	45	-4.5	1.75	0.75	40,000	0.55	—	30,000	0.010	—	B5A	1
XP1.5V	(T)	1.5*	0.08	50	—	-4.5	1.75	—	7,250	0.72	—	8,500	0.0067	—	Sm4	1
XY1.5V	(P)	1.5*	0.16	45	45	-1.5	1.75	0.35	66,000	1.0	—	27,000	0.014	—	Sm5	1
P215	(T)	2.0*	0.15	150	—	-12.0	8.0	—	3,600	2.2	—	10,000	0.15	—	B4	1
P220	(T)	2.0*	0.2	150	—	-7.5	6.0	—	4,750	3.0	—	9,000	0.18	—	B4	1
PF220	(T)	2.0*	0.2	150	—	-12.0	12.5	—	2,300	3.0	—	5,000	0.25	—	B4	1
PX230	(T)	2.0*	0.3	150	—	-15.0	17.5	—	1,850	3.5	—	4,000	0.45	—	B4	1
XP2.0V	(T)	2.0*	0.08	50	—	-3.0	2.0	—	6,000	1.0	—	7,200	0.0052	—	Sm4	1
XY2.0V	(P)	2.0*	0.16	50	50	-2.0	1.75	0.4	60,000	1.4	—	25,000	0.020	—	Sm5	1
Y220	(TT)	2.0*	0.2	150	150	-4.5	10.5	1.3	—	—	—	11,500	0.5	—	B4	7
Y230	(TT)	2.0*	0.3	150	150	-3.0	7.0	1.0	—	—	—	20,000	0.4	—	B5	6
Z220	(TT)	2.0*	0.2	150	150	-6.0	18.0	2.1	—	—	—	7,500	1.0	—	B4	7
ACL	(T)	4.0	1.0	250	—	-13.5	17.0	—	2,350	4.25	760	6,300	0.67	—	B5	1
ACQ	(TT)	4.0	1.35	375	250	-22.0	57.0	2.5	—	—	370	4,000	11.5	—	B7	24
ACY	(TT)	4.0	1.0	250	250	-10.0	32.0	4.3	—	—	30	6,500	3.0	—	B5	7
ACZ	(TT)	4.0	2.0	250	250	-5.5	32.0	4.3	—	—	160	6,500	3.0	—	B7	24
ACZDD	(DD, TT)	4.0	2.0	250	250	-5.5	32.0	4.3	—	—	160	6,500	3.0	—	B5	7
FY	(TT)	4.0*	1.0	250	250	-10.0	32.0	6.0	—	—	250	6,000	3.0	—	B7	9
PX5	(T)	4.0*	2.0	400	—	-34.0	62.5	—	1,480	6.5	530	3,000	5.75	—	B5	6
6C4	(T)	6.3	0.15	250	—	-8.5	10.5	—	7,700	2.2	—	—	—	—	B7G	15
Y13	(TT)	13.0	0.3	250	250	-22.0	35.0	4.5	—	—	550	4,000	3.0	—	B7	24
Z26	(TT)	26.0	0.3	250	250	-5.5	32.0	4.3	—	—	160	6,500	3.0	—	B7	24
<i>Current Types</i>																
XFY14	(P)	1.25*	0.05	67.5	67.5	-6.5	3.1	0.95	—	0.65	—	—	0.07	—	B5A	1
XFY15	(P)	1.25*	0.02	67.5	67.5	-6.5	3.1	0.95	—	0.65	—	—	0.07	—	B5A	1
XFY31	(P)	1.25*	0.0125	22.5	22.5	0	0.38	0.095	—	0.41	—	100,000	0.0018	—	B5A	1
XFY32	(P)	1.25*	0.0125	16.25	16.25	0	0.44	0.1	—	0.35	—	100,000	0.0018	—	B5A	1
XFY33	(P)	1.25*	0.0175	15	15	-1.2	0.2	0.05	—	0.23	—	75,000	0.001	—	B5A	1
XFY41	(P)	1.25*	0.01	22.5	22.5	0	0.38	0.095	—	0.41	—	100,000	0.0018	—	B5A	1
XFY43	(P)	1.25*	0.01	15	15	-1.2	0.2	0.05	—	0.23	—	75,000	0.001	—	B5A	1
XFY51	(P)	1.25*	0.01	22.5	22.5	0	0.32	0.09	—	0.32	—	80,000	0.0023	—	B5A	1
XFY53	(P)	1.25*	0.01	22.5	22.5	-3.0	0.45	0.17	—	0.34	—	40,000	0.00375	—	B5A	1
XFY54	(P)	1.25*	0.01	22.5	22.5	-2.0	0.34	0.08	—	0.28	—	30,000	0.00275	—	B5A	1

MARCONI*Obsolete Types*

N14	(P)	1.4*	0.1	90	90	-7.0	7.0	1.7	—	1.55	700	8,000	0.25	—	10	78
N15	(P)	1.4*	0.1†	90	90	-7.0	7.0	1.7	—	1.55	—	8,000	0.25	12	10	87
N16	(P)	1.4*	0.1†	90	90	-4.5	9.5	1.3	—	2.1	—	8,000	0.27	6	10	87
KT21	(BT)	2.0*	0.3	150	120	-2.5	5.3	1.0	—	5.3	—	19,000	0.46	—	B5	6
KT24	(BT)	2.0*	0.2	150	150	-2.8	10.0	2.1	—	3.2	200	10,000	0.64	10	B5	6
KT42	(BT)	4.0	1.0	250	250	-16.5	34.0	5.5	—	2.5	420	7,000	3.25	—	B7	24
KT45	(BT)	4.0	2.0	300	300	-15.0	85.0	6.3	—	6.3	160	2,200	7.25	9	B7	37
N43	(P)	4.0	2.0	250	250	-4.4	40.0	10.0	—	10.0	90	5,400	4.5	—	B7	15
PT25	(P)	4.0*	2.0	400	200	-22.0	62.5	10.6	—	4.0	330	6,000	10.0	—	B5	6
KT81	(BT)	6.3	0.95	250	250	-4.4	40.0	7.5	—	10.8	90	6,000	4.3	8	B8B	10
KT30	(BT)	13.0	0.3	250	250	-12.0	40.0	7.0	—	3.9	260	7,500	2.7	—	B7	24
KT35	(BT)	13.0	0.6†	200	200	-11.5	50.0	8.5	—	10.0	200	4,000	4.2	—	10	73
KT31	(BT)	26.0	0.3	200	180	-4.0	40.0	10.6	—	10.0	80	5,500	2.5	—	B7	15

Replacement Types

DL92/N17	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	—	1.425	—	8,000	0.27	12	B7G	6
KT2	(BT)	2.0*	0.2	150	150	-4.5	7.5	1.7	—	2.5	—	17,000	0.5	—	B5	6
LP2	(T)	2.0*	0.2	100	—	-3.0	5.0	—	4,170	3.6	—	7,000	0.15	—	B4	1
P2	(T)	2.0*	0.2	100	—	-6.0	11.0	—	2,150	3.5	—	4,500	0.3	—	B4	1
DA30	(T)	4.0*	2.0	300	—	-144.0	60.0	—	—	3.85	—	6,000	11.0	5.5	B4	1
DN41	(P, DD)	4.0	2.3	250	200	-3.3	32.0	8.0	—	10.0	90	7,800	4.5	—	B7	9
KT41	(BT)	4.0	2.0	250	250	-4.4	40.0	8.5	—	10.5	90	6,000	4.2	8	B7	24
MKT4	(BT)	4.0	1.0	200	200	-10.5	32.0	4.0	—	3.0	365	8,000	2.5	10	B7	24

(Continued)

Output Valves 1

Type	Heater		Volts			Current (mA)		r_a (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Grid	Screen	Anode	Screen							Type	Ref.	
MARCONI (Continued)																
<i>Replacement Types (Continued)</i>																
PX25	(T)	4.0*	2.0	400	—	-31.0	62.5	—	1,265	7.5	1,000	5,500	6.0	7	B4	1
KT63	(BT)	6.3	0.7	250	250	-16.5	34.0	5.5	—	2.5	420	7,000	4.8	—	10	36
KT76	(BT)	15.0	0.16	175	175	-12.5	33.0	6.0	—	2.5	300	5,000	2.0	4.5	10	36
KT32	(BT)	26.0	0.3	110	110	-7.0	50.0	4.0	—	9.0	95	1,300	2.3	11	10	36
KT71	(BT)	48.0	0.16	175	175	-9.8	70.0	12.0	—	10.0	120	2,500	5.0	9	10	36
KT101	(BT)	80.0	0.1	175	175	-9.8	70.0	12.0	—	10.0	180	3,000	3.8	12	B8B	10
	(T)	80.0	0.1	175	—	-7.5	120.0	—	—	11.5	—	—	—	—	B8B	10
<i>Current Types</i>																
DL94/N19	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	58
DL96	(P)	1.4*	0.05	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
N18/3Q4	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	6
KT44/45	(BT)	4.0	2.0	250	250	-25.0	85.0	20.0	—	6.3	—	2,200	7.5	9	B7	37
PX4	(T)	4.0*	1.0	300	—	-45.0	50.0	—	830	6.0	1,000	3,500	4.5	4	B4	1
EBL21/DN143(P, DD)	(P)	6.3	0.8	250	250	-6.0	36.0	4.5	70,000	9.0	120	5,700	4.5	10	B8B	62
ECL80/LN152	(TP)	6.3	0.3	200	200	-8.0	17.5	3.3	150,000	3.3	—	11,000	1.4	10	B9A	13
EL33/N147	(P)	6.3	0.9	250	250	-6.0	36.0	4.0	50,000	9.0	150	7,000	4.0	10	10	36
EL41/N150	(P)	6.3	0.7	250	250	-7.0	36.0	5.2	40,000	10.0	—	7,000	4.2	10	B8A	23
EL42/N151	(P)	6.3	0.2	225	225	-11.0	26.0	4.1	90,000	3.2	360	9,000	2.5	10	B8A	23
EL84/N709	(P)	6.3	0.76	250	250	-7.3	48.0	—	38,000	11.3	120	5,000	6.0	10	B9A	16
KT61	(BT)	6.3	0.95	250	250	-4.4	40.0	7.5	—	10.5	90	6,000	4.3	8	10	36
KT66	(BT)	6.3	1.27	250	250	-15.0	85.0	6.3	—	6.3	160	2,200	7.25	9	10	36
N144	(P)	6.3	0.2	250	250	-13.8	16.0	2.4	130,000	2.6	680	16,000	1.4	10	B7G	63
N148/7C5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	77,000	4.1	360	8,500	—	12	B8B	63
N155	(P)	6.3	0.2	225	225	-10.8	26.0	4.1	90,000	3.2	—	9,000	2.6	—	B9A	26
N727/6AQ5	(BT)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	240	5,000	4.5	8	B7G	27
HN309	(TP)	12.6	0.3	165	165	-9.0	30.0	6.5	45,000	4.7	220	6,000	—	10	B9A	27
PCL83/LN309	(TP)	12.6	0.3	200	200	-13.0	27.0	4.4	45,000	5.5	220	6,000	2.5	10	B9A	27
KT33C	(BT)	13.0	0.6†	175	175	-7.0	44.0	8.0	—	10.0	190	3,000	4.0	—	10	73
N37	(P)	13.0	0.3	165	165	-9.0	53.0	9.0	23,200	9.5	330	6,000	4.1	10	B7G	25
PL83/N309	(P)	15.0	0.3	200	200	-3.5	36.0	5.0	41,000	10.0	68	5,000	1.1	7.8	B9A	14
PL82/N329	(P)	16.5	0.3	200	200	-14.2	45.0	8.5	20,000	7.6	180	3,000	4.2	10	B9A	16
N108	(P)	40.0	0.1	165	165	-9.0	53.0	9.0	23,200	9.5	150	3,000	4.1	10	B7G	25
N145	(P)	40.0	0.1	180	150	-6.3	29.0	5.8	—	7.5	180	5,800	2.6	10	B8A	7
UL41/N142	(P)	45.0	0.1	200	200	-14.2	45.0	8.5	20,000	8.2	140	3,000	4.2	10	B8A	23

† Maximum anode voltage, 8,000 peak.

MULLARD

Obsolete Types

DL66	(P)	1.25*	0.015	22.5	22.5	-1.4	0.3	0.075	300,000	0.35	—	75,000	0.0027	10	B5A		
DL71	(P)	1.25*	0.025	45	45	-1.25	0.6	0.15	350,000	0.55	—	100,000	0.0063	10	B8D†	6	
DL72	(P)	1.25*	0.025	45	45	-4.5	1.25	0.4	170,000	0.55	2,700	30,000	0.02	10	B8D†	6	
DL75	(P)	1.25*	0.025	90	90	-2.5	1.75	0.4	450,000	0.85	—	60,000	0.05	10	B8D†	6	
DL2	(P)	1.4*	0.1	90	90	-7.5	7.5	1.6	115,000	1.55	—	8,000	0.24	10	C18	25	
ACO42	(T)	2.0*	2.0	300	—	-38.0	50.0	—	1,200	5.0	760	2,300	3.5	5	B4	1	
KL35	(P)	2.0*	0.15	135	135	-4.5	5.6	—	150,000	2.2	—	19,000	0.34	10	10	78	
PM2	(T)	2.0*	0.2	100	—	-7.0	4.0	—	7,000	0.9	—	9,000	—	—	B4	1	
PM2A	(T)	2.0*	0.2	135	—	-6.0	5.0	—	6,000	2.0	—	7,000	0.15	5	B4	1	
PM22	(P)	2.0*	0.2	150	150	-10.0	15.0	4.0	—	1.3	—	8,000	—	—	B5	6	
PM22A/5	(P)	2.0*	0.15	135	135	-4.5	5.6	—	150,000	2.2	—	19,000	0.34	10	B5	6	
PM22D	(P)	2.0*	0.3	135	135	-2.4	5.0	0.8	—	3.0	—	24,000	0.3	10	B5	6	
PM202	(T)	2.0*	0.2	150	—	-15.0	14.0	—	2,000	3.5	—	3,700	—	—	B4	1	
ACO44	(T)	4.0*	1.0	300	—	-38.0	50.0	—	1,200	5.0	760	2,300	3.5	5	B4	1	
DO24	(T)	4.0*	1.85	400	—	-40.0	63.0	—	1,070	7.5	630	3,200	7.1	4	B4	1	
DO26	(T)	4.0*	2.0	400	—	-92.0	63.0	—	950	3.8	1,500	3,000	7.5	10	B4	1	
DO30	(T)	4.0*	2.0	500	—	-134.0	60.0	—	580	6.9	2,250	6,000	11.0	—	B4	1	
Pen4VA	(P)	4.0	1.35	250	250	—	36.0	3.0	40,000	2.8	500	6,000	3.8	10	B5	7	
Pen4Z8	(P)	4.0	2.1	250	250	—	72.0	—	—	—	150	3,200	8.0	10	B7	24	
PM24A	(P)	4.0*	0.275	300	200	-22.5	20.0	3.5	—	1.7	—	10,000	2.5	10	B5	6	
PM24M	(P)	4.0*	1.1	20	200	-17.0	30.0	5.6	43,000	3.0	540	7,000	2.8	—	B5	6	
6L6	(BT)	6.3	0.9	300	250	-18.0	54.0	2.5	33,000	5.2	330	4,200	10.8	15	10	36	
EBL1	(P, DD)	6.3	1.2	250	250	-6.0	36.0	5.0	55,000	9.5	146	7,000	4.3	10	C18	13	
EC31	(T)	6.3	0.65	250	—	-16.0	20.0	—	3,300	3.2	800	10,000	0.5	5	10	20	
EL3	(P)	6.3	0.9	250	250	-6.0	36.0	4.0	50,000	9.0	150	7,000	4.0	10	C18	12	
	(T)	6.3	0.9	250	—	-8.5	20.0	—	3,000	6.5	425	7,000	11.0	5	C18	12	
EL6	}	(P)	6.3	1.2	250	250	-7.0	72.0	8.0	20,000	14.5	90	3,500	8.0	10	C18	12
EL36																	

† Flying Leads.

(Continued)

Output Valves 1

Type	Heater		Volts			Current (mA)		r _a (Ω)	g _m (mA/V)	R _K (Ω)	R _L (Ω)	Power Output (W)	D (%)	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.	
MULLARD (Continued)																
<i>Current Types (Continued)</i>																
EL95	(P)	6.3	0.2	250	250	-9.0	24.0	4.5	80,000	5.0	320	10,000	3.0	12	B7G	67
EL821	(P)	6.3	0.75	250	250	-4.5	40.0	6.0	50,000	11.0	—	—	—	—	B9A	19
EL822	(P)	6.3	0.75	250	150	-2.5	40.0	5.0	100,000	13.0	—	—	—	—	B9A	19
PCL83	(TP)	12.6	0.3	170	170	-9.5	30.0	5.0	53,000	5.5	—	5,500	2.2	10	B9A	27
PCL84	(TP)	15.0	0.3	220	220	-3.4	18.0	3.1	150,000	10.0	—	—	—	—	B9A	53
PL83	(P)	15.0	0.3	170	170	-2.3	36.0	5.0	100,000	10.0	—	—	—	—	B9A	14
PL84	(P)	15.0	0.3	170	170	-12.5	70.0	3.5	26,000	11.0	—	—	—	—	B9A	16
PCL82	(TP)	16.0	0.3	170	170	-11.5	41.0	9.0	16,000	7.5	—	3,900	3.3	10	B9A	37
PCL85	(TP)	18.0	0.3	170	170	-15.0	41.0	2.7	25,000	7.25	—	—	—	—	B9A	66
UL84	(P)	45.0	0.1	170	170	-12.5	70.0	5.0	23,000	10.0	170	2,400	5.6	10	B9A	16
HL92	(P)	50.0	0.15	110	110	-7.5	49.0	4.0	10,000	7.5	—	2,500	1.9	9	B7G	42

TUNGSRAM

<i>Obsolete Types</i>																
P215	(T)	2.0*	0.15	150	—	-12.0	12.0	—	3,300	1.5	—	7,000	0.26	—	B4	1
PP2	(P)	2.0*	0.14	135	135	-5.0	7.0	1.0	—	—	—	19,000	0.44	—	B4	7
PP215	(P)	2.0*	0.15	90	90	-4.5	8.0	1.2	—	—	—	14,000	0.2	—	B5	6
PP222	(P)	2.0*	0.22	150	150	-6.0	9.0	2.0	—	—	—	14,000	0.6	—	B4	7
PP225	(P)	2.0*	0.265	135	135	-12.0	18.0	2.0	—	—	—	6,000	0.8	—	B5	6
SP220	(T)	2.0*	0.2	150	—	-12.0	14.0	—	2,200	3.0	—	6,700	0.36	—	B4	1
APP4E	(P)	4.0	2.0	375	275	-13.5	72.0	8.0	—	—	175	3,500	8.8	—	B7	25
APP4g	(P)	4.0	2.0	250	250	-6.0	36.0	4.0	—	10.0	150	7,000	3.6	—	B7	5
APP4g*																
O15/400	(T)	4.0*	1.0	500	—	-37.0	40.0	—	1,800	4.5	900	6,000	3.5	—	B4	1
P12/250	(T)	4.0*	1.0	250	—	-33.0	48.0	—	830	6.0	700	2,400	2.75	—	B4	1
P15/250	(T)	4.0*	1.0	250	—	-44.0	60.0	—	660	6.0	750	2,500	3.5	—	B4	1
PP4	(P)	4.0	1.1	250	250	-15.0	36.0	6.0	—	—	400	7,500	3.1	—	B5	6
EBL1	(P, DD)	6.3	1.4	250	250	-6.0	36.0	4.0	—	9.5	150	7,000	3.6	—	Ct8	13
EL2	(P)	6.3	0.2	250	250	-18.0	32.0	5.0	—	2.8	480	8,000	3.6	—	Ct8	4
EL3	(P)	6.3	1.2	250	250	-7.0	36.0	4.5	—	9.5	175	7,000	4.5	—	Ct8	12
EL5	(P)	6.3	1.2	250	275	-14.0	72.0	7.0	—	8.5	175	3,500	8.8	—	Ct8	12
EL6	(P)	6.3	1.4	250	250	-7.0	72.0	8.5	—	15.0	85	3,500	8.2	—	Ct8	12
EL36	(P)	6.3	1.4	250	250	-7.0	72.0	8.5	—	15.0	85	3,500	8.2	—	IO	36
EL42	(P)	6.3	0.2	225	225	-10.0	26.0	4.1	90,000	3.2	360	9,000	2.5	10	B8A	23
P2018	(T)	20.0	0.18	200	—	-15.0	20.0	—	—	4.0	750	5,000	0.9	—	B5	1
PP2018	(P)	20.0	0.18	200	200	-18.0	20.0	5.0	—	2.5	720	8,800	1.4	—	B5	7
PP24	(P)	24.0	0.2	200	100	-19.0	40.0	5.0	—	3.0	400	5,000	3.2	—	B7	15
PP24S																
PP34	(P)	35.0	0.2	200	200	-6.5	45.0	5.0	—	8.5	170	4,400	3.2	—	B7	15
PP34S																
PP36	(P)	35.0	0.2	200	200	-6.5	45.0	5.0	—	8.5	170	5,000	3.2	—	B7	25
PP37	(P)	35.0	0.2	200	100	-9.5	45.0	5.0	—	8.5	190	4,500	3.5	—	B7	15
CL6																
<i>Replacement Types</i>																
1S4	(BT)	1.4*	0.1	90	67.5	-7.0	7.4	1.4	100,000	1.58	—	8,000	0.27	12	B7G	4
LP220	(T)	2.0*	0.2	150	—	-4.5	5.0	—	3,900	3.5	—	7,500	0.2	—	B4	1
2A5	(P)	2.5	1.75	250	250	-16.5	34.0	6.5	100,000	2.2	—	7,000	3.0	—	UX6	8
APP4A	(P)	4.0	1.2	250	250	-16.5	36.0	6.0	—	—	400	7,000	3.5	—	B5	7
APP4B	(P)	4.0	2.0	250	250	-5.0	36.0	4.0	—	—	140	7,000	3.6	—	B7	24
DDP4B																
DDP4M	(P, DD)	4.0	2.0	250	250	-5.0	36.0	4.0	—	8.0	150	7,000	3.6	—	B7	9
P27/500	(T)	4.0*	2.0	500	—	-31.0	62.5	—	1,050	8.5	500	5,000	5.0	—	B4	1
DDPP6B	(DD)	6.3	1.4	250	250	-6.0	36.0	5.0	—	9.5	150	7,000	4.3	—	B7	9
DDPP39	(P, DD)	35.0	0.2	200	200	-8.0	45.0	6.0	—	8.5	170	4,400	3.2	—	B7	9
DDPP39M																
PP35	(P)	35.0	0.2	200	200	-6.5	45.0	5.0	—	8.5	170	4,400	3.2	—	B7	22
<i>Current Types</i>																
1C5GT	(P)	1.4*	0.1	90	90	-7.5	7.5	1.6	115,000	1.55	—	8,000	0.24	10	IO	78
3A4	(P)	1.4*	0.2†	150	90	-8.4	13.3	2.2	100,000	1.9	—	8,000	0.7	6	B7G	7
3C4	(P)	1.4*	0.05	85	85	-5.2	5.0	0.9	150,000	1.4	—	13,000	0.2	10	B7G	9
3Q4	(P)	1.4*	0.1†	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	6
3Q5GT	(P)	1.4*	0.1†	90	90	-4.5	9.5	1.3	90,000	2.2	—	8,000	0.27	6	IO	87
3S4	(P)	1.4*	0.1†	90	67.5	-7.0	7.4	1.4	100,000	1.57	—	8,000	0.27	12	B7G	6

Type	Heater		Volts			Current (mA)		r _a (Ω)	g _m (mA/V)	R _k (Ω)	R _L (Ω)	Power Output (W)	D (%)	Base			
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.		
TUNGSRAM (Continued)																	
<i>Current Types (Continued)</i>																	
3V4	(P)	1.4*	0.14	90	90	-4.5	9.5	2.1	100,000	2.15	—	10,000	0.27	7	B7G	9	
42	(P)	6.3	0.7	Other data as Type 6F6												UX6	8
807	(BT)	6.3	0.9	500	200	-14.5	50.0	1.6	39,000	5.7	280	6,000	11.5	12	UX5	6	
6AB8	(TP)	6.3	0.3	200	200	-8.0	17.5	3.3	150,000	3.3	—	11,000	1.4	10	B9A	13	
6AM5	(P)	6.3	0.2	250	250	-12.5	16.0	2.4	130,000	2.6	680	16,000	1.4	10	B7G	25	
6AQ5	(P)	6.3	0.45	250	250	-12.5	45.0	4.5	52,000	4.1	250	5,000	4.5	8	B7G	27	
6BQ5	(P)	6.3	0.76	250	250	-7.3	48.0	5.5	38,000	11.3	135	5,200	5.7	10	B9A	16	
6C4	(T)	6.3	0.15	250	—	-8.5	10.5	—	7,700	2.2	—	—	—	—	B7G	15	
6CK5	(P)	6.3	0.7	250	250	-7.0	36.0	5.2	40,000	10.0	170	7,000	4.2	10	B8A	23	
	(T)	6.3	0.7	250	—	—	33.0	—	—	—	250	3,500	1.55	8			
6F6	(P)	6.3	0.7	285	285	-22.0	38.0	12.0	78,000	2.55	440	7,000	4.5	9	IO	36	
6L6	(BT)	6.3	0.9	300	200	-13.0	54.5	4.6	33,000	5.2	220	4,500	6.5	11	IO	36	
6M6	(P)	6.3	1.2	250	250	-6.0	36.0	4.0	—	9.5	150	7,000	4.4	—	IO	36	
6V6	(BT)	6.3	0.45	315	225	-13.0	35.0	6.0	77,000	3.75	315	8,500	5.5	12	IO	36	
EBL31	(P, DD)	6.3	1.2	250	250	-6.0	36.0	5.0	—	9.5	150	7,000	4.3	—	IO	15	
ECL82	(TP)	6.3	0.78	170	170	-11.5	41.0	7.5	16,000	7.5	—	3,900	3.3	10	B9A	37	
ECL83	(TP)	6.3	0.6	200	200	-13.0	27.0	4.4	65,000	5.5	—	7,500	—	10.5	B9A	27	
EL32	(P)	6.3	0.2	250	250	-18.0	32.0	5.0	70,000	2.8	485	8,000	3.6	10	IO	9	
EL33	(P)	6.3	1.2	250	250	-6.0	36.0	5.0	—	9.5	150	7,000	4.4	—	IO	36	
EL37	(P)	6.3	1.4	250	250	-13.5	100.0	13.5	13,500	11.0	120	2,500	10.5	10	IO	36	
EL85	(P)	6.3	0.2	225	225	-10.8	26.0	4.1	90,000	3.2	360	9,000	2.6	10	B9A	26	
EL95	(P)	6.3	0.2	250	250	-9.0	24.0	4.5	80,000	5.0	320	10,000	3.0	12	B79	67	
PP60	(BT)	6.3	1.27	250	250	-15.0	85.0	6.3	—	6.3	160	2,200	7.25	9	IO	36	
12A6	(BT)	12.6	0.15	250	250	-12.5	30.0	3.5	70,000	3.0	375	7,500	2.4	—	IO	36	
PCL83	(TP)	12.6	0.3	170	170	-9.5	30.0	5.0	53,000	5.5	—	5,500	2.2	10	B9A	27	
18	(P)	14.0	0.3	315	315	-22.0	42.0	8.0	75,000	2.65	—	7,000	5.0	—	UX6	8	
15A6	(P)	15.0	0.3	170	170	-2.3	36.0	5.0	100,000	10.0	—	—	—	—	B9A	14	
16A8	(TP)	16.0	0.3	170	170	-11.5	41.0	7.5	16,000	7.5	—	3,900	3.3	10	B9A	37	
16A5	(P)	16.5	0.3	170	170	-10.4	53.0	10.0	20,000	9.0	165	3,000	4.0	10	B9A	16	
PL33	(P)	19.0	0.3	250	250	-6.0	36.0	4.0	50,000	9.0	150	7,000	4.5	10	IO	36	
	(T)	19.0	0.3	250	—	-8.5	20.0	—	3,000	6.5	425	7,000	1.1	5			
25A6	(P)	25.0	0.3	160	120	-18.0	36.0	12.0	42,000	2.4	450	5,000	2.2	10	IO	36	
25L6	(BT)	25.0	0.3	200	110	-8.0	55.0	7.0	30,000	9.5	160	3,000	4.3	10	IO	36	
35L6	(BT)	35.0	0.15	200	110	-8.0	44.0	7.0	40,000	5.9	185	4,500	3.3	10	IO	36	
CL33	(P)	35.0	0.2	200	200	-7.5	45.0	5.0	—	8.0	170	4,300	3.2	—	IO	36	
CBL31	(P, DD)	39.0	0.2	200	200	-8.0	45.0	6.0	—	8.5	170	4,400	3.2	—	IO	15	
UCL83	(TP)	40.0	0.1	170	170	-9.5	30.0	5.0	53,000	5.5	—	5,500	2.2	10	B9A	27	
45A5	(P)	45.0	0.1	170	170	-10.4	53.0	10.0	20,000	9.5	140	3,000	4.2	10	B8A	7	
UL46	(P)	45.0	0.1	170	170	-10.4	53.0	10.0	20,000	9.5	—	3,000	4.2	10	B8A	7	
UL84	(P)	45.0	0.1	165	165	-12.0	73.0	4.5	20,000	10.5	—	2,400	5.6	10	B9A	16	
50C5	(BT)	50.0	0.15	110	110	-7.5	49.0	4.0	14,000	7.5	—	3,000	1.9	—	B7G	42	
50L6	(BT)	50.0	0.15	200	110	-8.0	55.0	7.0	30,000	9.5	160	3,000	4.3	10	IO	36	
UCL82	(TP)	50.0	0.1	200	100	-16.0	35.0	7.0	25,000	6.4	—	5,600	—	—	B9A	37	

AMERICAN

<i>Current Types</i>																
1AC5	(P)	1.25*	0.04	67.5	67.5	-4.5	2.0	0.4	150,000	0.75	—	25,000	0.05	10	Wires	78
1V5	(P)	1.25*	0.04	67.5	67.5	-4.5	2.0	0.04	150,000	0.75	—	25,000	0.05	—	Wires	92
2E35	(P)	1.25*	0.03	22.5	22.5	0	0.27	0.07	—	0.39	—	—	0.001	—	Wires	78
2E36	(P)	1.25*	0.03	45	45	-1.25	0.45	0.11	250,000	0.5	—	100,000	0.006	—	Wires	78
1A5	(P)	1.4*	0.05	90	90	-4.5	4.0	1.1	300,000	0.85	—	25,000	0.115	7	IO	78
1B8	(SD, TP)	1.4*	0.1	90	90	-6.0	6.3	1.4	—	1.15	—	14,000	0.21	—	IO	92
1C5	(P)	1.4*	0.1	90	90	-7.5	7.8	3.5	115,000	1.55	—	8,000	0.24	10	IO	78
1D8	(SD, TP)	1.4*	0.1	90	90	-9.0	5.0	1.0	200,000	0.93	—	12,000	0.2	10	IO	92
1LA4	(P)	1.4*	0.05	90	90	-4.5	4.0	1.1	300,000	0.85	—	25,000	0.115	7	B8B	27
1LB4	(P)	1.4*	0.1	90	90	-9.0	5.0	1.0	200,000	0.93	—	12,000	0.2	10	B8B	27
1N6	(SD, P)	1.4*	0.05	90	90	-4.5	3.4	1.2	300,000	0.8	—	25,000	0.1	7	IO	84
1Q5	(BT)	1.4*	0.1	90	90	-4.5	9.5	1.3	75,000	2.2	—	8,000	0.27	6	IO	78
1S4	(BT)	1.4*	0.1	90	67.5	-7.0	7.4	1.4	100,000	1.58	—	8,000	0.27	12	B7G	4
1T5	(BT)	1.4*	0.05	90	90	-6.0	6.5	1.5	250,000	1.15	—	14,000	0.17	7.5	IO	78
3B5	(BT)	1.4*	0.14	67.5	67.5	-7.0	8.0	0.6	100,000	1.65	—	5,000	0.2	—	IO	87
3C5	(P)	1.4*	0.14	90	90	-9.0	6.0	1.4	—	1.55	—	8,000	0.24	—	IO	87
3LF4	(P)	1.4*	0.14	90	90	-4.5	8.0	1.0	80,000	2.0	—	7,000	0.23	—	B8B	32
3Q5	(BT)	1.4*	0.14	110	110	-6.6	10.0	1.4	100,000	2.2	—	8,000	0.4	6	IO	87
1F4	(P)	2.0*	0.12	135	135	-4.5	8.0	2.4	200,000	1.7	—	16,000	0.31	5	UX5	3
1F5																
1G5	(P)	2.0*	0.12	135	135	-13.5	9.7	3.6	160,000	1.55	—	9,000	0.55	11	IO	78
1J5	(P)	2.0*	0.12	135	135	-16.5	7.0	2.0	100,000	0.95	—	13,500	0.45	—	IO	78

(Continued)

Output Valves 1

Type	Heater		Volts			Current (mA)		r_a (Ω)	g_m (mA/V)	R_K (Ω)	R_L (Ω)	Power Output (W)	D (%)	Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen							Type	Ref.
AMERICAN (Continued)															
<i>Current Types (Continued)</i>															
2A3 (T)	2.5*	2.5	250	—	-45.0	60.0	—	800	5.25	750	2,500	3.5	5	UX4	1
3LE4 (P)	2.8*	0.05	90	90	-9.0	9.0	1.8	110,000	1.6	—	6,000	0.3	—	B8B	32
6A3 } (T)	6.3*	1.0	250	—	-45.0	60.0	—	800	5.25	750	2,400	3.2	5	UX4	1
6B4 } IO															
6A4 (P)	6.3*	0.3	180	180	-12.0	22.0	3.9	45,500	2.2	465	8,000	1.4	9	UX5	3
6A5 (T)	6.3	1.0	250	—	-45.0	60.0	—	800	5.25	750	2,500	3.75	—	IO	35
6AB6 (T)	6.3	0.5	250	—	0	34.0	—	40,000	1.8	—	8,000	3.5	—	IO	23
6AC5 (T)	6.3	0.4	250	—	—	—	—	36,000	3.4	—	7,000	3.7	—	IO	20
6AC6 (T)	6.3	1.1	180	—	0	45.0	—	—	3.0	—	4,000	3.8	—	IO	23
6AD7 (TP)	6.3	0.85	250	250	-16.5	36.0	10.5	80,000	2.5	—	7,000	3.2	—	IO	42
6AG7 (P)	6.3	0.65	300	150	-3.0	30.0	7.0	130,000	11.0	—	10,000	3.0	7	IO	17
6AH5 (BT)	6.3	0.9	350	250	-18.0	—	—	33,000	5.2	—	4,200	10.8	—	IO	104
6AL6 (BT)	6.3	0.9	250	250	-14.0	72.0	5.0	22,500	6.0	180	2,500	6.5	—	IO	38
6AN5 (P)	6.3	0.5	120	120	-6.0	35.0	12.0	12,500	8.0	—	—	—	—	B7G	14
6AR5 (P)	6.3	0.4	250	250	-16.5	35.0	5.5	65,000	2.4	—	7,000	3.2	—	B7G	41
6AR6 (BT)	6.3	1.2	250	250	-22.5	77.0	5.0	21,000	5.4	275	—	—	—	IO	37
6AS5 (BT)	6.3	0.8	150	110	-8.5	36.0	6.5	—	5.6	—	4,500	2.2	—	B7G	42
6AS7 (DT)	6.3	2.5	135	—	-31.5	125.0	—	280	7.5	250	—	—	—	IO	26
6AU5 (P)	6.3	1.25	450	175	-50.0	85.0	—	—	6.0	—	—	—	—	IO	140
6B5 } (DT)	6.3	0.8	300	—	0	42.0	—	24,000	2.4	—	7,000	4.0	5	UX6	5
6N6 } IO															
6G6 (P)	6.3	0.15	180	180	-9.0	15.0	2.5	175,000	2.3	540	10,000	1.1	10	IO	23
6K6 (P)	6.3	0.4	315	250	-21.0	28.0	9.0	75,000	2.1	570	9,000	4.5	15	IO	36
6U6 (T)	6.3	0.75	250	135	-14.0	56.0	3.0	20,000	6.2	240	3,000	5.5	—	IO	36
6W6 (BT)	6.3	1.25	135	135	-9.5	61.0	12.0	—	9.0	130	2,000	3.3	—	IO	36
7A5 (BT)	6.3	0.75	125	125	-9.0	45.0	9.5	17,000	6.0	165	2,700	2.2	10	B8B	10
7O5 (BT)	6.3	0.4	315	250	-21.0	28.0	9.0	75,000	2.1	570	9,000	4.5	15	B8B	10
12A5 (P)	6.3*	0.6†	180	180	-25.0	48.0	14.0	35,000	2.4	400	3,300	3.4	11	UX7	7
12A7 (P, R)	12.6	0.3	135	135	-13.5	9.0	2.5	100,000	0.98	1,200	13,500	0.55	—	UX7	3
12L8 (DP)	12.6	0.15	180	180	-9.0	13.5	4.6	160,000	2.5	—	10,000	1.0	—	IO	41
14A5 (BT)	12.6	0.15	250	250	-12.5	30.0	3.5	70,000	3.0	375	7,500	2.8	—	B8B	10
14C5 (BT)	12.6	0.22	—	—	Other data as Type 6V6			—	—	—	—	—	—	B8B	10
25A7 (P, R)	25.0	0.3	100	100	-15.0	20.5	4.0	50,000	1.8	615	4,500	0.77	9	IO	99
25AC5 (T)	25.0	0.3	165	—	For use with direct-coupled 6AF5 driver			—	—	—	3,500	3.3	—	IO	20
25B5 } (T)	25.0	0.3	180	—	0	46.0	—	15,000	2.3	—	4,000	3.8	9	UX6	5
25N6 } IO															
25B6 (P)	25.0	0.3	200	135	-23.0	71.0	13.0	18,000	5.0	275	2,500	7.1	15	IO	36
25C6 (BT)	25.0	0.3	200	135	-14.0	66.0	9.0	18,300	7.1	186	2,600	6.0	10	IO	36
26A7 (DBT)	26.5	0.6	26.5	26.5	-4.5	20.0	2.0	2,500	5.5	—	1,500	0.2	—	IO	41
28D7 (DBT)	28.0	0.4	28	28	—	9.0	0.7	—	—	—	4,000	0.08	—	B8B	38
32L7 (BT, R)	32.5	0.3	90	90	-7.0	27.0	8.0	17,000	4.8	200	2,600	1.0	9	IO	99
35B5 (BT)	35.0	0.15	110	110	-7.5	41.0	7.0	—	5.8	185	2,500	1.5	10	B7G	27
35C5 (BT)	35.0	0.15	110	110	-7.5	41.0	7.0	—	5.8	—	2,500	1.5	—	B7G	42
50B5 (BT)	50.0	0.15	110	110	-7.5	49.0	4.0	14,000	7.5	140	2,500	1.9	9	B7G	27
50C6 (BT)	50.0	0.15	135	135	-13.5	58.0	3.5	9,300	7.0	220	2,000	3.6	—	IO	36
70A7 (BT, R)	70.0	0.15	110	110	-7.5	40.0	3.0	—	5.8	175	2,500	1.5	—	IO	105
70L7 (BT, R)	70.0	0.15	110	110	-7.5	43.0	6.0	15,000	7.5	150	2,000	1.8	10	IO	43
117L7 } (BT, R)	117.0	0.09	105	105	-5.2	43.0	5.5	17,000	5.3	110	4,000	0.85	5	IO	44
117M7 }															
117N7 (BT, R)	117.0	0.09	100	100	-6.0	51.0	5.0	16,000	7.0	110	3,000	1.2	6	IO	45
117P7 (BT, R)	117.0	0.09	105	105	-5.2	43.0	5.5	17,000	5.3	110	4,000	0.85	5	IO	45

OUTPUT VALVES 2

(Push-pull operation)

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) g-g	R_{IN} (Ω)	R_K (per valve) (Ω)	R_L (Ω)	Power Output (W)	D (%)	Class	Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.
BRIMAR																
<i>Obsolete Types</i>																
1S4 (BT)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3Q4 (BT)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3S4 (BT)	—	—	90	90	-16.5	2.0-8.4	0.35-2.7	32.5	—	—	10,000	—	6.0	AB ₁	—	
19 (DT)	2.0†	0.26	135	—	0	10-27	—	—	10,000	—	—	2.1	—	B	UX6	7
2A3 (T)	—	—	300	—	-62.0	40.0-74	—	124	∞	—	3,000	15.0	2.5	AB ₁	—	
41/41E (P)	—	—	285	285	—	27.5-31	4.5-6.5	51.0	—	400	12,000	9.8	4.0	A ₁	—	

(Continued)

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) r-r	R _{IN} (Ω)	R _K (per valve) (Ω)	R _L r-r (Ω)	Power Output (W)	D (%)	Class	Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.
BRIMAR (Continued)																
<i>Obsolete Types (Continued)</i>																
6A3	(T)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
42	(P)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
7A2	(P)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
6B4	(T)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
6F6	(P)	—	—	315	285	—	31.0	9.0	58.0	∞	320	10,000	10.5	3.0	A ₁	—
6K6	(P)	—	—	285	285	—	27.5-31	4.5-6.5	51.0	∞	400	12,000	9.8	4.0	A ₁	—
79	(DT)	6.3	0.6	250	—	—	10.6	—	—	—	—	14,000	8.0	—	B	UX6 6
6N7	(DT)	6.3	0.8	300	—	0	35.0	—	82.0	1,032	—	8,000	10.0	8.0	B	10 22
7C5	(BT)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
7D5	(P)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
807	(BT)	—	—	500	300	—	50-60	1.25-8.3	72.0	∞	270	9,000	32.5	2.7	A ₁	—
				600	300	-29.5	40-75	0.75-8.8	59.0	∞	—	10,000	47.5	2.2	A ₁	—
				600	300	-30.0	30-100	2.5-10.5	78.0	∞	—	6,400	80.0	3.5	AB ₂	—
				325	—	—	40-42	—	60.0	∞	375	8,000	6.0	0.6	A	—
18	(P)	—	—	400	—	-45.0	30-70	—	90.0	∞	—	3,000	15.0	3.0	AB ₁	—
				250	250	-31.0	47.0	11.5	—	—	250	7,000	12.0	—	A	—
21S1	(P)	—	—	250	250	-31.0	47.0	11.5	—	—	250	7,000	12.0	—	A	—
<i>Replacement Types</i>																
3V4	(BT)	—	—	90	90	-9.4	2.0-6.4	0.5-2.3	20.0	—	—	14,000	0.58	3.8	AB ₁	—
DL96/3C4	(P)	—	—	81.5	81.5	-8.5	1.0-5.0	0.2-1.3	22.4	—	—	16,000	0.44	2.6	B	—
6AM5	(P)	—	—	250	250	—	13.0	4.1	30.0	∞	600	24,000	4.0	3.2	A	—
6CD6	(BT)	—	—	200	110	-14.0	80.0	5.8	28.0	∞	90	3,000	13.5	1.75	A ₁	—
	(T)	—	—	200	—	-33.5	70.0	—	62.0	∞	240	1,500	4.8	2.7	A ₁	—
6L6	(BT)	—	—	270	270	—	72.5	8.5	40.0	∞	125	5,000	18.5	4.0	A ₁	—
				360	270	—	50.0	9.5	57.0	∞	250	9,000	24.0	4.0	AB ₁	—
				360	270	-22.5	69.0	8.0	45.0	∞	—	6,600	26.5	1.8	AB ₂	—
				325	—	—	42.0	—	60.0	∞	375	8,000	6.0	0.6	A ₂	—
6V6	(BT)	—	—	285	285	-19.0	35-46	2.0-6.8	38.0	∞	250	8,000	14.0	3.5	AB ₁	—
9BW6	(BT)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
EL41	(P)	—	—	300	300	—	36.0	9.5	24.0	∞	140	9,000	13.0	2.5	AB ₁	—
UL41	(P)	—	—	200	200	—	45-53	9.0-19	35.0	∞	130	4,000	12.5	—	—	—
19AQ5	(BT)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
50C5	(BT)	—	—	110	110	-7.5	49.0	4.0	15.0	∞	70	4,000	3.75	7.0	A ₁	—
	(T)	—	—	110	—	-7.5	53.0	—	15.0	∞	70	2,000	0.75	2.1	A ₁	—
50CD6	(BT)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
<i>Current Types</i>																
5763	(BT)	—	—	300	225	—	43.0	7.3	13.75	∞	68	11,500	7.5	4.2	A ₁	—
				300	225	—	28.5	7.3	21.0	∞	150	13,500	8.8	4.4	AB ₁	—
				300	225	-12.5	70.0	9.0	71.0	∞	—	4,500	25.0	9.6	AB ₂	—
6AK6	(P)	—	—	180	180	—	14.5	3.8	18.0	∞	260	20,000	2.5	5.3	A ₁	—
				275	225	-21.0	15.7	4.0	42.0	∞	—	20,000	5.2	4.2	AB ₁	—
6AQ5	(BT)	—	—	250	250	-15.0	35-40	2.5	30.0	∞	—	10,000	10.0	3.0	AB ₁	—
				250	250	—	49.0	6.8	26.0	∞	120	10,000	9.0	2.5	A ₁	—
6BW6	(BT)	—	—	285	285	—	39.3	5.0	45.0	∞	260	8,000	12.0	1.0	AB ₁	—
				315	285	-19.0	77.5	8.0	80.0	∞	—	5,000	30.0	7.0	AB ₂	—
				285	—	—	41.4	—	38.0	∞	240	4,500	3.1	0.5	A ₁	—
6CH6	(BT)	—	—	250	250	—	40.0	8.8	9.0	∞	50	9,000	8.0	7.5	A ₁	—
				250	—	—	46.0	—	9.0	∞	50	5,000	1.8	1.0	A	—
13D3	(DT)	6.3	0.6†	250	—	—	21.6	—	45.3	∞	—	20,000	6.7	11.5	B	B9A 1
EL84/6BQ5	(P)	—	—	300	300	—	36.0	4.0	28.0	∞	130	8,000	17.0	10.0	AB ₁	—
ECL82/6BM8	(TP)	—	—	200	200	—	39.5	16.5	35.0	∞	380	6,000	9.8	4.0	AB ₁	—
ELL30	(DP)	6.3	0.55	250	250	—	21.0	4.2	22.6	∞	180§	11,000	8.5	5.0	AB ₁	B9A 68
PCL32	(TP)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Data as Type ECL82																
§ Common resistor.																

COSSOR

Obsolete Types

220B	(DT)	2.0*	0.2	120	—	0	6.0	—	—	3,000	—	12,000	1.1	—	B ₂	B7 10
240B	(DT)	2.0*	0.4	120	—	0	8.5	—	—	2,500	—	8,000	2.0	—	B ₂	B7 10
240QP	(DP)	2.0*	0.4	150	150	-12.0	6.0	—	—	∞	—	24,000	1.25	—	B ₁	B7 11
6L6	(BT)	—	—	270	270	—	67.0	5.5	40.0	∞	250	5,000	18.5	2.0	A	—
				360	270	—	44.0	2.5	57.0	∞	500	9,000	24.0	4.0	AB ₁	—
				360	270	-22.5	44.0	2.5	72.0	∞	—	3,800	47.0	2.0	AB ₂	—
6V6	(BT)	—	—	285	285	-19.0	35.0	2.0	38.0	∞	500	8,000	14.0	3.5	AB ₁	—
<i>Replacement Type</i>																

(Continued)

Output Valves 2

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) g-g	R _{IN} (Ω)	R _K (per valve) (Ω)	R _L a-a (Ω)	Power Output (W)	D (%)	Class	Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.
COSSOR (Continued)																
<i>Current Types</i>																
DL96 (P)	—	—	81.5	81.5	-8.5	1.0	0.2	20.0	—	—	16,000	0.44	2.2	B	—	—
807 (BT)	—	—	400	300	-25.0	100-165	5-10	48.0	—	—	8,400	45.0	—	AB ₁	—	—
EL84/6BQ5 (P)	—	—	600	300	-30.0	66-150	5-10	58.0	—	—	12,000	65.0	—	AB ₁	—	—
PCL82 (TP)	—	—	300	300	—	46.0	11.0	28.0	—	130§	8,000	17.0	4.0	AB	—	—
UCL82 (TP)	—	—	200	200	—	35.0	7.0	25.0	—	190	6,000	9.8	4.0	AB	—	—
	—	—	200	200	—	35.0	7.0	25.0	—	190	6,000	9.8	4.0	AB	—	—
										§ Common						

EDISWAN MAZDA

<i>Obsolete Types</i>																
PD220 (DT)	2.0*	0.2	150	—	-1.15	0.4	—	58.0	3,300	—	11,500	2.85	5.0	B ₂	B7	10
PD220A (DT)	2.0*	0.2	150	—	-6.0	1.25	—	74.0	7,000	—	10,000	2.9	5.0	B ₂	B7	10
QP25 (DP)	2.0*	0.2	120	120	-9.75	2.3	0.43	19.5	∞	—	15,500	1.2	5.0	B ₁	MO	9
QP230 (DP)	2.0*	0.3	120	120	-9.6	2.3	0.6	19.0	∞	—	17,000	0.85	5.0	B ₁	B7	11
QP240 (DP)	2.0*	0.45	150	130.5	-11.5	2.0	0.45	23.0	∞	—	15,000	2.25	5.0	B ₁	B9	4
PA40 (T)	4.0*	2.0ψ	450	—	-96.5	107.0	—	192.0	∞	—	4,000	40.0	5.0	AB ₁	B4	1
Pen44 (BT)	—	—	300	275	-12.2	77.0	25.0	23.0	∞	—	5,000	24.0	5.0	AB ₁	—	—
Pen45 (BT)	—	—	250	250	—	41.5	12.5	19.0	∞	180	7,500	11.5	5.0	AB ₁	—	—
V503 (T)	4.0*	2.0ψ	450	—	-96.5	107.0	—	192.0	∞	—	4,000	40.0	5.0	AB ₁	B4	1
11E1 (BT)	6.3	1.2ψ	450	250	-25.0	101.0	10.5	50.0	∞	—	5,000	52.0	3.0	AB ₁	MO	20
<i>Replacement Types</i>																
6P25 (BT)	—	—	250	250	—	41.5	12.5	19.0	∞	180	7,500	11.5	5.0	AB ₁	—	—
10P13	(BT)	—	180	185	—	30.0	13.0	22.0	∞	270	7,000	7.0	3.0	AB ₁	—	—
	(T)	—	220	—	—	30.0	—	27.0	∞	470	4,500	3.4	3.0	A	—	—
10P14	(BT)	—	195	210	—	48.0	26.5	26.0	∞	180	6,000	10.7	4.0	AB ₁	—	—
	(T)	—	200	210	—	34.0	22.5	36.0	∞	330	7,000	10.0	3.0	AB ₁	—	—
20P3	(BT)	—	250	—	—	45.0	—	36.0	∞	430	4,000	5.9	3.0	—	—	—
	(T)	—	195	210	—	48.0	26.5	26.0	∞	180	6,000	10.7	4.0	AB ₁	—	—
			200	210	—	34.0	22.5	36.0	∞	330	7,000	10.0	3.0	AB ₁	—	—
			250	—	—	45.0	—	36.0	∞	430	4,000	5.9	3.0	A	—	—
<i>Current Types</i>																
1P1	—	—	81.5	81.5	-8.5	1.0	0.18	22.0	∞	—	16,000	0.44	2.6	B	—	—
6P15 (P)	—	—	250	250	—	37.5	7.5	22.5	∞	260	8,000	11.0	3.0	AB ₁	—	—
12E13 (T)	6.3	1.8ψ	425	—	—	90.0	—	100.0	—	525	4,000	27.0	1.3	A	IO	36
30PL12 (TP)	—	—	200	200	—	39.5	16.5	3.5	—	190	6,000	9.8	4.0	AB	—	—
30P16 (P)	—	—	170	170	—	49.0	16.5	26.0	∞	200	4,000	9.0	4.0	AB ₁	—	—

ψ Filament current per valve.

EMITRON

<i>Current Types</i>																
6AQ5 (BT)	—	—	250	250	-15.0	35.0	2.5	30.0	∞	—	10,000	10.0	3.0	AB ₁	—	—
6L6G (BT)	—	—	270	270	—	67.0	5.5	40.0	∞	250	5,000	18.5	2.0	A	—	—
			360	270	—	44.0	2.5	57.0	∞	500	9,000	24.5	4.0	AB ₁	—	—
7C5 (BT)	—	—	360	270	-22.5	44.0	2.5	72.0	—	—	3,800	47.0	2.0	AB ₂	—	—
			285	285	-19.0	35.0	2.0	38.0	∞	—	8,000	14.0	3.5	AB ₁	—	—

FERRANTI

<i>Obsolete Types</i>																
OPT2 (DP)	2.0*	0.4	150	150	-9.0	3.3	0.9	—	∞	—	25,000	1.2	—	B ₁	B7	11
LP4 (T)	—	—	300	—	-50.0	50.0	—	110.0	∞	500	3,800	13.5	2.5	AB ₁	—	—
<i>Replacement Types</i>																
6F6 (P)	—	—	375	250	-26.0	32.0	2.5	82.0	∞	—	10,000	18.5	3.5	AB ₂	—	—
			315	285	—	31.0	6.0	58.0	∞	320	10,000	10.5	3.0	A ₁	—	—
6K6 (P)	—	—	285	285	—	27.5	4.5	51.0	∞	400	12,000	9.8	4.0	A ₁	—	—
			270	270	—	67.5	5.5	40.0	∞	125	5,000	18.5	2.0	A ₁	—	—
6L6 (BT)	—	—	360	270	—	44.0	2.5	57.0	∞	250	9,000	24.0	4.0	AB ₁	—	—
			360	270	-22.5	44.0	2.5	72.0	∞	—	3,800	47.0	2.0	AB ₂	—	—
6V6 (BT)	—	—	282	285	-19.0	35.0	2.0	38.0	∞	—	8,000	14.0	3.5	AB ₁	—	—
			42 (P)	—	—	—	—	—	—	—	—	—	—	—	—	—
EL41/6CK5 (P)	—	—	300	300	—	36.0	9.5	24.0	∞	140	9,000	13.0	2.5	AB ₁	UX6	8
EL42 (P)	—	—	300	—	—	33.0	—	9.4	—	150	10,000	4.0	1.0	AB ₁	—	—
EL90/6AQ5 (P)	—	—	250	250	—	21.5	6.7	35.0	—	310	15,000	7.0	5.5	AB ₁	—	—
EL91/6AM5 (P)	—	—	250	250	—	35.0	2.5	30.0	∞	200	10,000	10.0	3.0	AB ₁	—	—
UL41 (P)	—	—	170	170	—	11.0	1.6	34.0	∞	600	24,000	4.0	3.2	AB ₁	—	—
						49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	—
<i>Current Types</i>																
3S4/DL92 (P)	—	—	90	90	-16.5	8.4	2.7	32.0	—	—	10,000	0.78	6.0	AB ₁	—	—
3V4/DL94 (P)	—	—	90	90	-9.4	6.4	2.3	20.0	—	—	14,000	0.58	3.8	AB ₁	—	—
DL96/3C4 (P)	—	—	81.5	81.5	-8.5	4.5	1.1	20.0	—	—	16,000	0.44	2.2	B	—	—
			90	90	—	4.25	1.25	20.0	—	560	20,000	0.42	4.0	AB ₁	—	—

(Continued)

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) g-2	R _{IN} (Ω)	R _K (per valve) (Ω)	R _L g-2 (Ω)	Power Output (W)	D (%)	Class	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.	
FERRANTI (Continued)																	
<i>Current Types (Continued)</i>																	
BL84/	(P)	—	—	300	300	—	46.0	11.0	28.0	—	130	8,000	17.0	4.0	AB ₁	—	—
6BQ5	(T)	—	—	—	—	—	36.0	—	28.0	—	270	10,000	5.3	2.5	AB ₁	—	—
PCL83	(TP)	12.6	0.3	200	200	—	29.0	8.5	23.5	—	220	7,500	2.5	10.0	AB	—	—
PL84	(P)	15.0	0.3	170	170	—	57.0	20.0	13.1	—	120	3,500	13.0	4.5	AB	—	—
PL81/21A6	(P)	—	—	200	200	-31.5	87.0	12.5	31.0	—	—	2,500	20.0	5.5	B	—	—
PL82/16A5	(P)	—	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	—
UL84	(P)	—	—	170	170	-17.0	57.5	20.5	18.5	—	120	3,500	13.0	4.5	AB ₁	—	—

G.E.C.*Obsolete Types*

N15	(P)	—	—	90	90	-11.0	6.0	2.3	17.0	∞	2,200	16,000	0.56	6.0	B ₁	—	—
QP21	(DP)	2.0*	0.4	150	150	-9.0	12.6	6.0	—	∞	—	25,000	1.0	—	B ₁	B7	11
KT35	(BT)	—	—	200	200	-14.7	58.5	15.0	14.7	∞	100	4,000	14.0	5.6	AB ₁	—	—
KT71	(BT)	—	—	175	175	-10.2	72.5	15.0	28.0	∞	140	2,500	11.5	4.5	AB ₁	—	—

Replacement Types

N14	(P)	—	—	90	90	-11.0	6.0	2.4	17.0	∞	2,200	16,000	0.56	6.0	AB ₁	—	—
PX4	(T)	—	—	300	—	-50.0	50.0	—	110.0	∞	1,000	4,000	13.5	2.5	AB ₁	—	—
PX25	(T)	—	—	500	—	-50.0	50.0	—	102.0	∞	1,000	10,000	20.0	2.0	A	—	—
				500	—	-54.0	82.5	—	108.0	∞	—	—	—	3,400	26.0	4.0	AB ₁
A2134	(P)	—	—	250	165	—	40.0	12.0	30.0	—	300	7,500	13.3	4.5	AB ₁	—	—
				165	—	-10.5	32.5	—	24.0	—	330	3,000	2.6	1.4	AB ₁	—	—
EL84/N709	(P)	—	—	250	250	—	31.0	3.5	22.5	—	260	8,000	11.0	3.0	AB ₁	—	—
EL90/																	
N727	(BT)	—	—	250	250	-15.0	35.0	2.5	30.0	—	—	10,000	10.0	3.0	AB ₁	—	—
KT61	(BT)	—	—	275	275	-6.7	36.0	6.0	16.0	∞	80	10,000	11.5	6.5	AB ₁	—	—
KT63	(BT)	—	—	250	250	-20.0	32.0	7.0	39.0	∞	250	12,000	6.0	4.0	AB ₁	—	—
KT81	(BT)	—	—	275	275	-8.7	38.0	10.0	17.5	∞	80	10,000	11.5	6.5	AB ₁	—	—
				350	—	—	36.5	—	23.0	∞	150	6,000	6.0	2.0	AB ₁	—	—
N78	(P)	—	—	250	250	-5.0	35.0	5.5	11.2	—	120	9,000	9.0	4.6	AB ₁	—	—
				350	—	-9.5	28.5	—	21.0	—	330	8,000	6.3	1.6	AB ₁	—	—
DA41	(T)	7.5*	3.1 ψ	1,000	—	0	140.0	—	220.0	—	—	7,000	175.0	5.0	B	UX4	20
PCL83/	(TP)	—	—	165	165	—	28.0	6.0	28.0	—	220	6,000	5.2	2.3	AB ₁	—	—
LN309																	
KT33C	(BT)	—	—	200	200	-19.1	56.5	9.0	44.0	∞	240	4,000	15.5	7.5	AB ₁	—	—
KT76	(BT)	—	—	175	175	-18.0	25.0	7.5	41.0	∞	350	8,000	4.8	3.0	AB ₁	—	—
PL82/N329	(P)	—	—	170	170	—	49.0	16.5	26.0	—	200	4,000	9.0	4.0	AB ₁	—	—
KT32	(BT)	—	—	135	135	-10.0	50.0	4.0	19.7	∞	200	2,500	7.5	5.0	AB ₁	—	—
KT55	(BT)	52	0.3 ψ	190	190	-25.0	112.5	22.5	28.8	—	185	2,000	25.0	—	AB ₁	}IO	36
				200	—	-22.0	120.0	—	21.0	—	185	1,500	15.0	—	AB ₁		
KT101	(BT)	—	—	175	175	-10.5	59.0	11.0	28.0	∞	140	2,500	11.5	4.5	AB ₁	—	—
<i>Current Types</i>																	
KT66	(BT)	—	—	400	400	-35.0	62.5	•	80.0	∞	560	7,000	32.0	2.0	ULAB ₁	—	—
				500	500	-60.0	80.0	•	130.0	∞	—	—	—	8,000	50.0	2.0	ULAB ₁
KT77	(BT)	6.3	1.4 ψ	400	—	-38.0	62.5	—	80.0	∞	600	4,000	14.5	3.5	AB ₁	—	—
				600	600	-28.0	60/77	62.0	23.0	11.5	470	6,000	30.6	2.5	UL	}IO	—
				430	—	-27.0	60/66	60.0	85.0	3.8	440	5,000	17.6	1.2	AB ₁		
KT88	(BT)	—	—	425	425	-44.0	83.0	•	110.0	—	525	6,000	50.0	2.0	ULAB ₁	—	—
				550	550	-80.0	150.0	•	160.0	—	—	—	—	4,500	100.0	3.6	ULAB ₁
TT21	(T)	6.3	1.6 ψ	1,250	300	-45.0	28/130	71.0	12.0	11.0	—	15,000	200.0	7.0	AB ₁	—	—
				1,250	—	-4.0	120.0	—	20.0	—	—	—	—	13,000	20.0	6.0	B
TT22	(T)	12.6	0.8 ψ	1,250	300	-45.0	28/130	71.0	12.0	11.0	—	15,000	200.0	7.0	AB ₁	—	—

 ψ Per valve of pair. * Included under anode current.**HIVAC***Obsolete Types*

B230	(DT)	2.0*	0.3	150	—	0	5.5	—	—	4,000	—	14,500	1.25	—	B ₂	B7	10
QP240	(DP)	2.0*	0.4	150	150	-18.0	14.0	—	—	∞	—	14,500	1.4	—	B ₁	B7	11

MARCONI*Obsolete Types*

N14	(P)	—	—	90	90	-11.0	6.0	2.4	17.0	∞	2,200	16,000	0.56	6.0	AB ₁	—	—
N15	(P)	—	—	90	90	-11.0	6.0	2.3	17.0	∞	2,200	16,000	0.56	6.0	B ₁	—	—
KT81	(BT)	—	—	275	275	-8.7	38.0	10.0	17.5	∞	80	10,000	11.5	6.5	AB ₁	—	—
				350	—	—	36.5	—	23.0	∞	150	6,000	6.0	2.0	AB ₁	—	—
KT35	(BT)	—	—	200	200	-14.7	58.5	15.0	14.7	∞	100	4,000	14.0	5.6	AB ₁	—	—

(Continued)

Output Valves 2

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) e-e	R _{JN} (Ω)	R _K (per valve) (Ω)	R _L a-a (Ω)	Power Output (W)	D (%)	Class	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.	
MARCONI (Continued)																	
<i>Replacement Types</i>																	
QP21 (DP)	2.0*	0.4	150	120	-4.5	5.6	1.4	—	∞	—	25,000	0.5	—	B ₁	B7	11	
PX25 (T)	—	—	500	—	-50.0	50.0	—	102.0	∞	1,000	10,000	20.0	2.0	A	—	—	
KT63 (BT)	—	—	250	250	-20.0	32.0	7.0	39.0	∞	250	12,000	6.0	4.0	AB ₁	—	—	
KT76 (BT)	—	—	175	175	-18.0	25.0	7.5	41.0	∞	350	8,000	4.8	3.0	AB ₁	—	—	
KT32 (BT)	—	—	135	135	-10.0	50.0	4.0	19.7	∞	200	2,500	7.5	5.0	AB ₂	—	—	
KT71 (BT)	—	—	175	175	-10.2	72.5	15.0	28.0	∞	140	2,500	11.5	4.5	AB ₂	—	—	
KT101 (BT)	—	—	175	175	-10.5	59.0	11.0	28.0	∞	140	2,500	11.5	4.5	AB ₁	—	—	
<i>Current Types</i>																	
PX4 (T)	—	—	300	—	-15.0	45.0	—	110.0	∞	1,000	4,000	13.5	2.5	AB ₁	—	—	
EL84/N709 (P)	—	—	250	250	—	31.0	3.5	22.5	—	260	8,000	11.0	3.0	AB ₁	—	—	
KT61 (BT)	—	—	275	275	-6.7	36.0	6.0	16.0	∞	80	10,000	11.5	6.5	AB ₁	—	—	
KT66 {	(BT)	—	400	400	-35.0	62.5	*	80.0	∞	560	7,000	32.0	2.0	ULAB ₁	—	—	
			500	500	-60.0	80.0	*	130.0	∞	—	8,000	50.0	2.0	ULAB ₁	—	—	
N78 {	(P)	—	400	—	-38.0	62.5	—	80.0	∞	600	4,000	14.5	3.5	AB ₁	—	—	
			250	250	-5.0	35.0	5.5	11.2	—	120	9,000	9.0	4.6	AB ₁	—	—	
N727/6AQ5(BT)	(T)	—	350	—	-9.5	28.5	—	21.0	—	330	8,000	6.3	1.6	AB ₁	—	—	
DA41 (T)	7.5	3.1ψ	250	250	-15.0	35.0	2.5	30.0	—	—	10,000	10.0	3.0	AB ₁	—	—	
HN309 (TP)	—	—	1,000	—	0	140.0	—	220.0	—	—	7,000	175.0	5.0	B	UX4	20	
PCL83/ LN309 (TP)	—	—	165	165	—	28.0	6.0	28.0	—	220	6,000	5.2	2.3	AB ₁	—	—	
KT33C (BT)	—	—	165	165	-11.5	23.0	3.0	28.0	—	440	6,000	5.2	2.3	AB ₁	—	—	
PL82/N329 (P)	—	—	200	200	-19.1	56.5	9.0	44.0	∞	240	4,000	15.5	7.5	AB ₁	—	—	
UL41/N142 (P)	—	—	170	170	—	49.0	16.5	26.0	—	200	4,000	9.0	4.0	AB ₁	—	—	
KT55 {	(BT)	52	0.3ψ	190	190	-25.0	112.5	22.5	28.8	—	185	2,000	25.0	2.0	AB ₁	} IO	36
				200	—	-22.0	120.0	—	21.0	—	185	1,500	15.0	—	AB ₁		

ψ Each valve of pair. * Included with anode current.

MULLARD

Obsolete Types

DL75 (P)	—	—	90	90	—	1.5	0.33	—	—	2,200	100,000	0.1	4.5	AB	—	—
PM2B (DT)	2.0*	0.2	120	—	0	20.0	—	40.0	4,000	—	14,000	1.25	—	B ₂	B7	10
QP22B (DP)	2.0*	0.3	120	120	-10.7	3.3	0.45	23.0	∞	—	14,700	1.0	—	B ₁	B7	11
KLL32 (DP)	2.0*	0.3	135	135	-11.3	16.9	5.7	12.0	∞	—	16,000	1.2	2.8	AB ₁	IO	97
DO30 (T)	—	—	500	—	-145.0	55.0	—	285.0	∞	—	3,400	45.0	3.0	AB ₁	—	—
6V6 (BT)	—	—	285	285	—	35.0	2.0	45.0	—	520	8,000	14.0	3.5	AB	—	—
6L6 (BT)	—	—	360	270	-22.5	44.0	2.5	72.0	—	—	3,800	47.0	2.0	AB ₂	—	—
EL6 (P)	—	—	250	250	—	53.0	8.5	20.0	∞	90	5,000	14.5	2.2	AB ₁	—	—
EL22 (P)	—	—	300	300	—	43.0	7.8	26.0	∞	140	8,000	15.4	5.0	A	—	—
EL31 (P)	—	—	800	400	-26.0	30.0	3.1	51.0	—	—	10,000	120	5.0	AB ₁	—	—
			400	400	—	63.0	8.3	44.0	—	145	7,000	37	5.0	AB ₁	—	—
EL35 (P)	—	—	360	270	—	53.0	17.5	65.0	∞	250	7,000	21.0	3.0	AB ₁	—	—
EL50 (P)	—	—	375	275	—	62.0	9.0	45.0	∞	165	6,500	28.5	2.25	AB ₁	—	—
CL6 (P)	—	—	250	125	—	42.5	12.5	38.0	∞	180	7,000	13.5	6.3	AB ₁	—	—

Replacement Types

DL92 (P)	—	—	90	90	-16.5	8.4	2.7	32.0	—	—	10,000	0.78	6.0	AB ₂	—	—
DL96 (P)	—	—	81.5	81.5	-8.5	5.0	1.3	22.5	—	—	16,000	0.44	2.6	B	—	—
Pen428 (P)	—	—	375	275	-23.5	62.0	9.0	45.0	∞	165	6,500	28.0	3.0	AB ₁	—	—
6F6 (P)	—	—	315	285	—	31.0	6.0	58.0	—	640	10,000	10.5	3.0	A	—	—
EL32 (P)	—	—	250	250	—	32.0	8.0	42.0	∞	310	8,000	7.0	1.5	A	—	—
EL33 {	(P)	—	250	250	—	28.5	4.6	18.0	∞	140	10,000	8.2	3.1	A	—	—
			325	325	—	90.0	30.0	61.0	∞	130	4,000	35.0	4.4	AB ₁	—	—
			400	400	-36.0	138.0	36.0	70.0	∞	—	3,250	69.0	2.5	AB ₁	—	—
EL37 {	(P)	—	400	—	—	80.0	—	77.0	∞	245	4,000	20.6	4.3	A	—	—
			300	300	—	36.0	9.5	24.0	—	140	9,000	13.0	2.5	AB ₁	—	—
EL41 {	(T)	—	300	—	—	33.0	—	9.4	—	150	10,000	4.0	1.0	A	—	—
			250	250	—	21.5	6.7	35.0	—	310	15,000	7.0	5.5	AB ₁	—	—
EBL21 (P)	—	—	300	300	—	36.0	6.5	20.0	∞	130	9,000	13.2	1.8	AB ₁	—	—
UL41 (P)	—	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	—

Current Types

ECL83 (TP)	—	—	200	200	—	29.0	8.5	33.0	—	220§	7,500	7.2	4.2	AB	—	—			
EL34 {	(P)	—	375	R _{g2} 600Ω§	-33.0	107.5	23.5	65.0	—	—	—	3,500	48.0	2.8	—	—	—		
			400	R _{g2} 800Ω§	-36.0	110.5	23.0	70.0	—	—	—	—	3,500	54.0	1.6	—	—	—	
			800	400	-39.0	91.0	19.0	66.0	—	—	—	11,000	100.0	5.0	—	—	—	—	
			375	R _{g2} 470Ω§	—	94.0	19.5	56.0	—	—	260	3,500	35.0	1.7	—	—	—	—	
			450	R _{g2} 1kΩ§	—	71.5	22.0	75.0	—	—	465	6,500	40.0	5.1	—	—	—	—	
			430	R _{g2} 1kΩ§	—	70.0	14.0	70.0	—	—	470	6,000	34.0	2.5	—	—	—	—	—
			430	—	—	70.0	—	70.0	—	—	440	5,000	19.0	1.8	—	—	—	—	—

(Continued)

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) $e-z$	R_{IN} (Ω)	R_K (per valve) (Ω)	R_L $a-a$ (Ω)	Power Output (W)	D (%)	Class	Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.
MULLARD (Continued)																
<i>Current Types (Continued)</i>																
EL84	(P)	—	300	300	—	46.0	11.0	28.0	—	130	8,000	17.0	4.0	AB	—	—
EL85	(P)	—	250	250	—	22.1	7.1	34.5	—	310	12,000	6.8	5.4	AB	—	—
EL90	(P)	—	250	250	-15.0	35.0	2.5	30.0	—	—	10,000	10.0	3.0	AB ₂	—	—
EL91	(P)	—	250	250	—	12.8	4.1	34.0	∞	600	24,000	4.0	3.2	AB	—	—
EL95	(P)	—	250	250	—	26.0	7.5	13.0	—	360	10,000	7.0	5.0	AB	—	—
UL84	(P)	—	200	200	—	50.0	5.0	41.0	—	150 \S	3,500	15.0	3.5	AB	—	—
PCL82	(TP)	—	200	200	—	39.5	16.5	3.5	—	190	6,000	9.8	4.0	AB	—	—
PCL83	(TP)	—	200	200	—	29.0	8.5	33.0	—	220	7,500	7.2	4.2	AB	—	—
PL33	(P)	—	250	250	—	28.5	4.8	18.0	∞	140	10,000	8.2	3.1	A	—	—
PL82	(P)	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	—

† Fixed bias and separate screen grid supply. § Common resistor.

S.T.C.

<i>Current Types</i>																
5B/254M	(T)	6.3	0.9 ψ	400	—	-45.0	140.0	—	90.0	—	3,000	15.0	3.0	AB ₁	B8B	66
5B/255M																65
828	(P)	10.0	3.25 ψ	1,700 1,250	750 750	-120.0 -120.0	248.0 150.0	43.0 —	240.0 —	—	16,200 12,500	300.0 200.0	1.0 <1	AB ₁	UX5	8

ψ Each valve.

TUNGSRAM

<i>Obsolete Types</i>																	
CB215	(DT)	2.0*	0.22	135	—	0	12.0	—	—	—	10,000	1.7	—	B ₂	B7	10	
CB215S																Ct8	28
CB220	(DT)	2.0*	0.35	150	—	-3.0	15.0	—	—	4,000	10,000	2.0	—	B ₂	B7	10	
ELL1	(DT)	6.3	0.45	250	250	-21.5	15.0	2.5	43.0	∞	600	16,000	5.4	A	Ct8	19	
<i>Replacement Type</i>																	
EL42	(P)	—	—	250	250	-21.5	6.7	—	35.0	—	310	15,000	7.0	5.5	AB ₁	—	—
<i>Current Types</i>																	
3C4	(P)	—	—	81.5	81.5	-8.5	1.0	0.2	20.0	—	—	16,000	0.44	2.2	B	—	—
3S4	(P)	—	—	90	90	-16.5	8.4	2.7	32.0	—	—	10,000	0.78	6.0	AB ₁	—	
																—	
807	(BT)	—	—	400	300	-25.0	45-120	1-9	78.0	—	—	3,200	55.0	—	AB ₂	—	
				500	300	-29.0	36-120	1-8	86.0	—	—	4,240	75.0	—	AB ₂	—	
				600	300	-30.0	30-100	1-6	78.0	—	—	6,400	80.0	—	AB ₁	—	
				750	300	-32.0	26-120	1-8	92.0	—	—	6,950	15.0	3.0	AB ₁	—	
				400	—	-45.0	30-70	—	90.0	—	—	3,000	15.0	3.0	AB ₁	—	
16A5	(P)	—	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	
45A5	(P)	—	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	
6AM5	(P)	—	—	250	250	—	12.8	4.1	34.0	∞	600	24,000	4.0	3.2	A	—	
6BQ5	(P)	—	—	300	300	—	46.0	11.0	28.0	—	130	8,000	17.0	4.0	AB	—	
6CK5	(P)	—	—	300	300	—	36.0	9.5	24.0	—	140	9,000	13.0	2.5	AB ₁	—	
				300	—	—	33.0	—	9.4	—	150	10,000	4.0	1.0	A	—	
6F6	(P)	—	—	315	285	-24.0	31.0	6.0	48.0	∞	—	10,000	11.0	4.0	A	—	
				315	285	—	31.0	6.0	58.0	∞	640	10,000	10.5	3.0	A	—	
				270	270	—	67.0	5.5	40.0	∞	250	5,000	18.5	2.0	A	—	
6L6	(BT)	—	—	360	270	—	44.0	2.5	57.0	∞	500	9,000	24.0	4.0	AB ₁	—	
				360	270	-22.5	44.0	2.5	72.0	∞	—	3,800	47.0	2.0	AB ₂	—	
6V6	(BT)	—	—	285	285	-19.0	35.0	2.0	38.0	∞	500	8,000	14.0	3.5	AB ₁	—	
6AQ5	(BT)	—	—	250	250	-15.0	35.0	2.5	30.0	∞	—	10,000	10.0	3.0	AB ₁	—	
EL32	(P)	—	—	250	250	—	32.0	8.0	42.0	∞	310	8,000	7.0	1.5	A	—	
EL33	(P)	—	—	250	250	—	28.5	4.8	18.0	∞	140	10,000	8.2	3.1	A	—	
EL37	(P)	—	—	325	325	—	90.0	30.0	61.0	∞	130	4,000	35.0	4.4	AB ₁	—	
				400	400	-36.0	138.0	36.0	70.0	∞	—	3,250	69.0	2.5	AB ₂	—	
				400	—	—	80.0	—	77.0	∞	245	4,000	20.6	4.3	A	—	
EL85	(P)	—	—	250	250	-22.1	7.1	34.5	—	310	12,000	6.8	5.4	AB	—		
EL95	(P)	—	—	250	250	—	26.0	7.5	13.0	—	360	10,000	7.0	5.0	AB	—	
				250	250	-9.0	24.0	7.5	13.0	—	—	10,000	6.5	3.5	B	—	
PL33	(P)	—	—	250	250	—	28.5	4.8	18.0	∞	140	10,000	8.2	3.1	A	—	
PP60	(BT)	—	—	390	275	—	62.5	9.0	70.0	∞	500	8,000	30.0	6.0	AB ₁	—	
				480	385	-40.0	87.5	9.5	80.0	∞	—	6,000	50.0	5.0	AB ₁	—	
				400	—	-38.0	62.5	—	80.0	∞	600	4,000	14.5	3.5	AB ₁	—	

Output Valves 2

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) e-g	R _{IN} (Ω)	R _K (per valve) (Ω)	R _L a-a (Ω)	Power Output (W)	D (%)	Class	Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.
AMERICAN																
1E7	2.0*	0.24	135	135	-7.5	10.5	3.5	15.0	∞	—	24,000	0.57	0.55	A	IO	97
1G6	1.4*	0.1	90	—	0	11.0	—	48.0	2,500	—	12,000	0.35	4.0	B ₂	IO	96
1J6	2.0*	0.25	135	—	0	—	—	—	—	—	10,000	2.1	—	B ₂	IO	96
4A6	2.0*	0.12 ψ	90	—	-1.5	10.8	—	—	—	—	8,000	1.0	—	B ₂	IO	95
2A3	—	—	300	—	-62.0	40.0	—	—	∞	—	3,000	15.0	2.5	AB ₁	—	—
6A3	—	—	300	—	—	40.0	—	—	∞	1,550	5,000	10.0	5.0	AB ₁	—	—
2E30	—	—	250	250	-25.0	40.0	6.8	—	∞	—	8,000	12.5	—	AB ₁	—	—
6A6	}	(DT)	6.3	0.8	300	—	0	35.0	—	—	8,000	10.0	8.0	B ₂	{UX7 IO	5
6N7																22
6A5	(T)	—	—	—	325	—	-68.0	40.0	—	∞	1,700	5,000	10.0	—	AB ₂	—
6AC5	(T)	—	—	—	250	—	0	—	—	—	—	10,000	8.0	—	B ₂	—
6E6	(DT)	6.3	0.6	250	—	-27.5	18.0	—	—	—	—	14,000	1.6	—	A	UX7
6Y7	(DT)	6.3	0.3	250	—	0	10.6	—	—	—	—	14,000	—	—	B ₂	IO
6Z7	(DT)	6.3	0.3	180	—	0	8.4	—	—	—	—	12,000	4.2	—	B ₂	IO

ψ Filament current per valve of pair.

OUTPUT VALVES 3

(For television line scan)

Type	Heater		Anode Supply Volts	Screen Volts	Typical R _K (Ω)	Positive Surge Anode Volts (max.)	Negative Surge Grid Volts (max.)	Max. Diss. (W)		Typical Current (mA)		Base	
	Volts	Amps						Anode	Screen	Anode	Screen	Type	Ref.
BRIMAR													
<i>Obsolete Type</i>													
19BG6	(BT)	19.0	0.3	—	—	—	—	—	—	—	—	—	—
Other data as Type 6BG6													
<i>Replacement Types</i>													
6BG6	(BT)	6.3	0.9	700	350	100	6,000	-400	20	3.2	70.0	6.0	IO
6CD6	(BT)	6.3	2.5	700	175	—	6,600	-200	15	3.0	100.0	6.0	IO
50CD6	(BT)	50.0	0.3	—	—	—	—	—	—	—	—	—	—
Other data as Type 6CD6													
<i>Current Types</i>													
PL81/21A6	—	21.5	0.3	170	170	—	7,000	—	8	4.5	45.0	3.0	B9A
PL36	—	25.0	0.3	170	170	—	7,000	1,500	10	5.0	100.0	8.0	IO
COSSOR													
<i>Obsolete Type</i>													
61BT	—	6.3	0.7	200	200	470	5,000	—	8	1.75	40.0	3.5	IO
<i>Replacement Types</i>													
41MPT	—	4.0	1.0	—	200	—	4,000	—	—	—	22.0	—	B7
42MPT	—	4.0	2.0	—	250	—	4,000	—	—	—	36.0	—	B7
62BT	—	6.3	1.27	180	180	160	8,000	—	25	5.5	120.0	9.5	IO
185BTA	(BT)	18.0	0.45	180	180	140	10,000	—	25	5.5	120.0	10.0	IO
<i>Current Types</i>													
EL38	—	6.3	1.4	300	250	120	8,000	—	25	8.0	64.0	18.0	IO
EL81	—	6.3	1.05	250	250	—	7,000	—	8	4.5	32.0	2.4	B9A
185BT	—	18.0	0.45	180	180	160	8,000	—	25	5.5	120.0	9.5	IO
PL81/21A6	—	21.5	0.3	170	170	—	7,000	—	8	4.5	45.0	3.0	B9A
PL36	—	25.0	0.3	170	170	—	7,000	1,500	8	5.0	100.0	8.0	IO
PL38	—	30.0	0.3	200	200	—	8,000	—	25	8.0	75.0	9.0	IO
EDISWAN MAZDA													
<i>Obsolete Types</i>													
AC/6Pen	(BT)	4.0	1.75	310	210	90	3,000	—	20	3.0	63.0	14.0	B7
Pen46	(BT)	4.0	1.75	315	230	100	3,000	—	20	3.4	63.0	14.0	MO

(Continued)

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) e-e	R _{IN} (Ω)	R _K (per valve) (Ω)	R _L e-a (Ω)	Power Output (W)	D (%)	Class	Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.	
MULLARD (Continued)																	
<i>Current Types (Continued)</i>																	
EL84	(P)	—	—	300	300	—	46.0	11.0	28.0	—	130	8,000	17.0	4.0	AB	—	—
EL85	(P)	—	—	250	250	—	22.1	7.1	34.5	—	310	12,000	6.8	5.4	AB	—	—
EL90	(P)	—	—	250	250	-15.0	35.0	2.5	30.0	—	—	10,000	10.0	3.0	AB ₁	—	—
EL91	(P)	—	—	250	250	—	12.8	4.1	34.0	∞	600	24,000	4.0	3.2	AB	—	—
EL95	(P)	—	—	250	250	—	26.0	7.5	13.0	—	360	10,000	7.0	5.0	AB	—	—
				250	250	-9.0	24.0	7.5	13.0	—	—	10,000	6.5	3.5	B	—	—
UL84	(P)	—	—	200	200	—	50.0	5.0	41.0	—	150§	3,500	15.0	3.5	AB	—	—
PCL82	(TP)	—	—	200	200	—	39.5	16.5	3.5	—	190	6,000	9.8	4.0	AB	—	—
PCL83	(TP)	—	—	200	200	—	29.0	8.5	33.0	—	220	7,500	7.2	4.2	AB	—	—
PL33	(P)	—	—	250	250	—	28.5	4.8	18.0	∞	140	10,000	8.2	3.1	A	—	—
PL82	(P)	—	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	—

† Fixed bias and separate screen grid supply. § Common resistor.

S.T.C.

<i>Current Types</i>																	
5B/254M	(T)	6.3	0.9ψ	400	—	-45.0	140.0	—	90.0	—	—	3,000	15.0	3.0	AB ₁	B8B	66
5B/255M																	65
828	(P)	10.0	3.25ψ	1,700	750	-120.0	248.0	43.0	240.0	—	—	16,200	300.0	1.0	AB ₁	UX5	8
				1,250	750	-120.0	150.0	—	—	—	—	12,500	200.0	<1			

ψ Each valve.

TUNGSRAM

<i>Obsolete Types</i>																		
CB215	(DT)	2.0*	0.22	135	—	0	12.0	—	—	—	—	10,000	1.7	—	B ₂	B7	10	
CB215S																	Ct8	28
CB220	(DT)	2.0*	0.35	150	—	-3.0	15.0	—	—	4,000	—	10,000	2.0	—	B ₂	B7	10	
ELL1	(DT)	6.3	0.45	250	250	-21.5	15.0	2.5	43.0	∞	600	16,000	5.4	—	A	Ct8	19	
<i>Replacement Type</i>																		
EL42	(P)	—	—	250	250	-21.5	6.7	—	35.0	—	310	15,000	7.0	5.5	AB ₁	—	—	
<i>Current Types</i>																		
3C4	(P)	—	—	81.5	81.5	-8.5	1.0	0.2	20.0	—	—	16,000	0.44	2.2	B	—	—	
3S4	(P)	—	—	90	90	-16.5	8.4	2.7	32.0	—	—	10,000	0.78	6.0	AB ₁	—	—	
807	(BT)	—	—	400	300	-25.0	45-120	1-9	78.0	—	—	3,200	55.0	—	AB ₂	—	—	
				500	300	-29.0	36-120	1-8	86.0	—	—	—	4,240	75.0	—	AB ₂	—	—
				600	300	-30.0	30-100	1-6	78.0	—	—	—	6,400	80.0	—	AB ₂	—	—
				750	300	-32.0	26-120	1-8	92.0	—	—	—	6,950	15.0	3.0	AB ₁	—	—
				400	—	-45.0	30-70	—	90.0	—	—	—	3,000	15.0	3.0	AB ₁	—	—
16A5	(P)	—	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	—	
45A5	(P)	—	—	170	170	—	49.0	16.5	26.0	—	100	4,000	9.0	4.0	AB ₁	—	—	
6AM5	(P)	—	—	250	250	—	12.8	4.1	34.0	∞	600	24,000	4.0	3.2	A	—	—	
6BQ5	(P)	—	—	300	300	—	46.0	11.0	28.0	—	130	8,000	17.0	4.0	AB	—	—	
6CK5	(P)	—	—	300	300	—	36.0	9.5	24.0	—	140	9,000	13.0	2.5	AB ₁	—	—	
				300	—	—	33.0	—	9.4	—	—	150	10,000	4.0	1.0	A	—	—
6F6	(P)	—	—	315	285	-24.0	31.0	6.0	48.0	∞	—	10,000	11.0	4.0	A	—	—	
				315	285	—	31.0	6.0	58.0	∞	640	10,000	10.5	3.0	A	—	—	
				270	270	—	67.0	5.5	40.0	∞	250	5,000	18.5	2.0	A	—	—	
6L6	(BT)	—	—	360	270	—	44.0	2.5	57.0	∞	500	9,000	24.0	4.0	AB ₁	—	—	
				360	270	-22.5	44.0	2.5	72.0	∞	—	3,800	47.0	2.0	AB ₂	—	—	
6V6	(BT)	—	—	285	285	-19.0	35.0	2.0	38.0	∞	500	8,000	14.0	3.5	AB ₁	—	—	
6AQ5	(BT)	—	—	250	250	-15.0	35.0	2.5	30.0	∞	—	10,000	10.0	3.0	AB ₁	—	—	
EL32	(P)	—	—	250	250	—	32.0	8.0	42.0	∞	310	8,000	7.0	1.5	A	—	—	
EL33	(P)	—	—	250	250	—	28.5	4.8	18.0	∞	140	10,000	8.2	3.1	A	—	—	
				325	325	—	90.0	30.0	61.0	∞	130	4,000	35.0	4.4	AB ₁	—	—	
EL37	(P)	—	—	400	400	-36.0	138.0	36.0	70.0	∞	—	3,250	69.0	2.5	AB ₁	—	—	
				400	—	—	80.0	—	77.0	∞	245	4,000	20.6	4.3	A	—	—	
				400	—	—	—	—	—	—	—	—	—	—	—	—	—	—
EL85	(P)	—	—	250	250	-22.1	7.1	34.5	—	310	12,000	6.8	5.4	AB	—	—		
EL95	(P)	—	—	250	250	—	26.0	7.5	13.0	—	360	10,000	7.0	5.0	AB	—	—	
				250	250	-9.0	24.0	7.5	13.0	—	—	10,000	6.5	3.5	B	—	—	
PL33	(P)	—	—	250	250	—	28.5	4.8	18.0	∞	140	10,000	8.2	3.1	A	—	—	
PP60	(BT)	—	—	390	275	—	62.5	9.0	70.0	∞	500	8,000	30.0	6.0	AB ₁	—	—	
				480	385	-40.0	87.5	9.5	80.0	∞	—	6,000	50.0	5.0	AB ₁	—	—	
				400	—	-38.0	62.5	—	80.0	∞	600	4,000	14.5	3.5	AB ₁	—	—	

Output Valves 2

Type	Heater		Volts			Current (mA) (per valve)		Input Volts (peak) e-g	R _{IN} (Ω)	R _K (per valve) (Ω)	R _L (Ω)	Power Output (W)	D (%)	Class	Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen								Type	Ref.
AMERICAN																
1E7	2.0*	0.24	135	135	-7.5	10.5	3.5	15.0	∞	—	24,000	0.57	0.55	A	1O	97
1G6	1.4*	0.1	90	—	0	11.0	—	48.0	2,500	—	12,000	0.35	4.0	B ₂	1O	96
1J6	2.0*	0.25	135	—	0	—	—	—	—	—	10,000	2.1	—	B ₂	1O	96
4A6	2.0*	0.12 ψ	90	—	-1.5	10.8	—	—	—	—	8,000	1.0	—	B ₂	1O	95
2A3	—	—	300	—	-62.0	40.0	—	—	∞	—	3,000	15.0	2.5	AB ₁	—	—
6A3	—	—	300	—	—	40.0	—	—	∞	1,550	5,000	10.0	5.0	AB ₁	—	—
2E30	—	—	{ 250 250	250	-25.0	40.0	6.8	—	∞	—	8,000	12.5	—	AB ₁	—	—
6A6	} (DT)	6.3	0.8	300	—	0	35.0	—	82.0	—	8,000	10.0	8.0	B ₂	{ UX7 1O	5 22
6N7																
6A5	(T)	—	—	325	—	-68.0	40.0	—	∞	1,700	5,000	10.0	—	AB ₁	—	—
6AC5	(T)	—	—	250	—	0	—	—	—	—	10,000	8.0	—	B ₂	—	—
6E6	(DT)	6.3	0.6	250	—	-27.5	18.0	—	—	—	14,000	1.6	—	A	UX7	18
6Y7	(DT)	6.3	0.3	250	—	0	10.6	—	—	—	14,000	—	—	B ₂	1O	22
6Z7	(DT)	6.3	0.3	180	—	0	8.4	—	—	—	12,000	4.2	—	B ₂	1O	22

ψ Filament current per valve of pair.

OUTPUT VALVES 3
(For television line scan)

Type	Heater		Anode Supply Volts	Screen Volts	Typical R _K (Ω)	Positive Surge Anode Volts (max.)	Negative Surge Grid Volts (max.)	Max. Diss. (W)		Typical Current (mA)		Base		
	Volts	Amps						Anode	Screen	Anode	Screen	Type	Ref.	
BRIMAR														
<i>Obsolete Type</i>														
19BG6	(BT)	19.0	0.3	—	—	—	—	—	—	—	—	—	—	—
Other data as Type 6BG6														
<i>Replacement Types</i>														
6BG6	(BT)	6.3	0.9	700	350	100	6,000	-400	20	3.2	70.0	6.0	1O	39
6CD6	(BT)	6.3	2.5	700	175	—	6,600	-200	15	3.0	100.0	6.0	1O	39
50CD6	(BT)	50.0	0.3	—	—	—	—	—	—	—	—	—	—	—
Other data as Type 6CD6														
<i>Current Types</i>														
PL81/21A6	—	21.5	0.3	170	170	—	7,000	—	8	4.5	45.0	3.0	B9A	17
PL36	—	25.0	0.3	170	170	—	7,000	1,500	10	5.0	100.0	8.0	1O	129

COSSOR

Obsolete Type

61BT	6.3	0.7	200	200	470	5,000	—	—	8	1.75	40.0	3.5	1O	38
------	-----	-----	-----	-----	-----	-------	---	---	---	------	------	-----	----	----

Replacement Types

41MPT	4.0	1.0	—	200	—	4,000	—	—	—	—	22.0	—	B7	5
42MPT	4.0	2.0	—	250	—	4,000	—	—	—	—	36.0	—	B7	5
62BT	6.3	1.27	180	180	160	8,000	—	25	5.5	120.0	9.5	1O	38	
185BTA	(BT)	18.0	0.45	180	180	140	10,000	—	25	5.5	120.0	10.0	1O	38

Current Types

EL38	6.3	1.4	300	250	120	8,000	—	25	8.0	64.0	18.0	1O	40
EL81	6.3	1.05	250	250	—	7,000	—	8	4.5	32.0	2.4	B9A	17
185BT	18.0	0.45	180	180	160	8,000	—	25	5.5	120.0	9.5	1O	38
PL81/21A6	21.5	0.3	170	170	—	7,000	—	8	4.5	45.0	3.0	B9A	17
PL36	25.0	0.3	170	170	—	7,000	1,500	8	5.0	100.0	8.0	1O	129
PL38	30.0	0.3	200	200	—	8,000	—	25	8.0	75.0	9.0	1O	40

EDISWAN MAZDA

Obsolete Types

AC/6Pen	(BT)	4.0	1.75	310	210	90	3,000	—	20	3.0	63.0	14.0	B7	36
Pen46	(BT)	4.0	1.75	315	230	100	3,000	—	20	3.4	63.0	14.0	MO	14

(Continued)

Type	Heater		Anode Supply Volts	Screen Volts	Typical R_K (Ω)	Positive Surge Anode Volts (max.)	Negative Surge Grid Volts (max.)	Max. Diss. (W)		Typical Current (mA)		Base		
	Volts	Amps						Anode	Screen	Anode	Screen	Type	Ref.	
EDISWAN MAZDA (Continued)														
<i>Replacement Types</i>														
6P28	(BT)	6.3	1.1	350	250	100	5,000	—	15.0	4.5	27.0	16.0	IO	38
20P1*	(BT)	38.0	0.2	400	250	—	6,000	1,500	15.0	5.0	—	—	IO	38
20P4		38.0	0.2	400	250	—	6,000	—	10.0	4.0	—	—	IO	38
<i>Current Types</i>														
30P4	(BT)	25.0	0.3	400	250	—	6,500	—	10.0	4.0	—	—	IO	129
30P19	(BT)	25.0	0.3	400	250	—	7,000	—	10.0	5.0	—	—	IO	129
* For use under self-oscillating conditions.														
EMITRON														
<i>Replacement Types</i>														
185BT	(BT)	18.0	0.45	180	180	140	8,000	—	25.0	5.5	120.0	10.0	IO	38
185BTA	(BT)	18.0	0.45	180	180	140	10,000	—	25.0	5.5	120.0	10.0	IO	38
FERRANTI														
<i>Replacement Type</i>														
EL81		6.3	1.05	250	250	—	7,000	—	8.0	4.5	32.0	2.4	B9A	17
<i>Current Types</i>														
PL81		21.5	0.3	170	170	—	6,000	1,000	7.0	4.5	45.0	3.0	B9A	17
PL36		25.0	0.3	170	170	—	7,000	1,500	12.0	5.0	100.0	7.0	IO	129
G.E.C.														
<i>Obsolete Type</i>														
KT45		4.0	2.0	250	250	—	8,000	—	21.5	3.5	—	—	B7	37
<i>Replacement Types</i>														
N339		20.0	0.3	190	150	—	7,500	—	12.0	4.5	50.0	—	B9A	17
PL81/N359	(P)	21.5	0.3	170	170	—	7,000	—	8.0	4.5	45.0	3.0	B9A	17
PL36		25.0	0.3	170	170	—	7,000	1,000	10.0	5.0	100.0	8.0	IO	129
KT36		26.0	0.3	250	200	—	4,000	—	10.0	3.0	—	—	IO	38
<i>Current Type</i>														
N308	(BT)	25.0	0.3	400	250	—	6,000	—	10.0	4.0	—	—	IO	129
MARCONI														
<i>Obsolete Type</i>														
KT44/45		4.0	2.0	—	300	—	8,000	—	21.5	—	—	—	B7	37
<i>Current Types</i>														
N339		20.0	0.3	190	150	—	7,500	—	12.0	4.5	50.0	—	B9A	17
PL81/N152		21.5	0.3	170	170	—	7,000	—	8.0	4.5	45.0	3.0	B9A	17
PL36		25.0	0.3	170	170	—	7,000	1,500	8.0	5.0	100.0	8.0	IO	129
KT36		26.0	0.3	250	200	—	4,000	—	10.0	3.0	—	—	IO	38
MULLARD														
<i>Obsolete Type</i>														
EL820		6.3	1.05	250	250	—	7,000	—	8.0	4.5	32.0	2.4	B9A	17
<i>Replacement Types</i>														
EL38		6.3	1.4	300	300	120	8,000	—	25.0	8.0	64.0	18.0	IO	40
PL820		21.5	0.3	170	170	—	7,000	—	8.0	4.5	45.0	3.0	B9A	17
PL38		30.0	0.3	200	200	—	8,000	—	25.0	8.0	75.0	9.0	IO	40
UL44		45.0	0.1	175	175	—	3,500	—	5.0	3.0	30.0	4.7	B8A	16
<i>Current Types</i>														
EL36		6.3	1.25	100	100	—	7,000	1,500	12.0	5.0	100.0	7.0	IO	129
EL81		6.3	1.05	250	250	—	7,000	—	8.0	4.5	32.0	2.4	B9A	17
PL81		21.5	0.3	170	170	—	6,000	—	8.0	4.5	45.0	3.0	B9A	17
PL36		25.0	0.3	170	170	—	7,000	1,000	10.0	5.0	100.0	8.0	IO	129
TUNSGRAM														
<i>Current Types</i>														
6C36		6.3	1.05	250	250	—	7,000	—	8.0	4.5	32.0	2.4	B9A	17
EL38		6.3	1.4	300	250	120	8,000	—	25.0	8.0	64.0	18.0	IO	40
21A6		21.5	0.3	170	170	—	7,000	—	8.0	4.5	45.0	3.0	B9A	17
PL36		25.0	0.3	170	170	—	7,000	1,500	8.0	5.0	100.0	8.0	IO	129
PL38		30.0	0.3	200	200	—	8,000	—	25.0	8.0	75.0	9.0	IO	40
UL44		45.0	0.1	175	175	—	3,500	—	5.0	3.0	30.0	4.7	B8A	17

THERMIONIC DIODES

Type	Heater		Max. Input Volts (r.m.s.)	Max. Rect. Current (mA)	No. of Diodes	Capacitances (pF)			Base	
	Volts	Amps				a'-k	a''-k	a'-a''	Type	Ref.
BRIMAR										
<i>Obsolete Types</i>										
6H6	6.3	0.3	150	8.0	2	3.0	4.0	0.1	IO	53
10D1	13.0	0.2	50	8.0	2	5.0	5.0	0.6	B5	3
<i>Current Types</i>										
6AL5	6.3	0.3	150	9.0	2	3.2	3.2	0.026	B7G	18
5726 (SQ)										
6058 (SQ)										
COSSOR										
<i>Obsolete Types</i>										
220DD	2.0	0.2	20	1.0	2	3.5	3.5	0.7	B5	3
DD4	4.0	0.75	100	10.0	2	3.7	3.7	0.7	B5	3
DDL4	4.0	0.75	100	10.0	2	4.0	4.0	2.5	B5	3
6H6	6.3	0.3	117	8.0	2	3.0	4.0	0.1	IO	53
SD6	6.3	0.15	150	10.0	1	1.45	—	—	B7G	39
12H6	12.6	0.15	Other data as Type 6H6			—	—	—	—	—
<i>Current Types</i>										
EB91	6.3	0.3	150	9.0	2	3.2	3.2	0.026	B7G	18
SD61	6.3	0.15	50	5.0	1	2.1	—	—	B3G	1
EDISWAN MAZDA										
<i>Obsolete Types</i>										
1D13	1.4	0.15	130	0.5	1	0.6	—	—	B7G	13
DD207	2.0*	0.075	—	—	2	4.0	3.25	0.8	B4	5
AC/DD	4.0	1.0	—	—	2	5.0	5.0	1.2	B5	3
D1	4.0	0.2	125	5.0	1	2.1	—	—	B3G	1
DD41	4.0	0.5	175	5.0	2	4.0	4.25	0.06	MO	13
V914	4.0	0.3	—	0.5	2	3.5	3.0	0.25	B5	3
DD620	6.0	0.2	—	0.5	2	3.5	3.0	0.25	B5	3
6D1	6.3	0.15	125	5.0	1	2.1	—	—	B3G	1
DD101	10.0	0.2	175	5.0	2	5.0	4.6	0.06	MO	13
<i>Replacement Types</i>										
6D3*	6.3	0.3	—	5.0	1	—	—	—	B7G	50
20D1	9.5	0.2	175	9.0	2	3.4	3.4	0.018	B7G	18
<i>Current Types</i>										
6D2	6.3	0.3	175	9.0	2	3.4	3.4	0.018	B7G	18
10D2	19.0	0.1	175	9.0	2	3.4	3.4	0.018	B7G	18
* Slow-heating cathode.										
EMITRON										
<i>Current Type</i>										
6AL5	6.3	0.3	150	9.0	2	3.0	3.0	0.026	B7G	18
FERRANTI										
<i>Obsolete Types</i>										
SD } ZD }	7.0	0.2	50	1.0	1	—	—	—	B5	8
<i>Replacement Types</i>										
6H6	6.3	0.3	150	8.0	2	3.0	4.0	0.1	IO	53
EB41	6.3	0.3	150	9.0	2	<0.01	<0.01	<0.03	B8A	10
<i>Current Types</i>										
6AL5/EB91	6.3	0.3	150	9.0	2	3.2	3.2	0.025	B7G	18
DD6	6.3	0.3	150	9.0	2	3.0	3.1	0.026	B7G	18
G.E.C.										
<i>Obsolete Type</i>										
D42	4.0	0.4	75	15.0	1	4.0	—	—	B4	8
<i>Replacement Types</i>										
D41	4.0	0.3	—	—	2	3.5	2.5	0.5	B5	3
D63	6.3	0.3	100	2.0	2	6.0	7.0	0.18	IO	53

(Continued)

Thermionic Diodes

Type	Heater		Max. Input Volts (r.m.s.)	Max. Rect. Current (mA)	No. of Diodes	Capacitances (pF)			Base	
	Volts	Amps				a'-k	a''-k	a'-a''	Type	Ref.
G.E.C. (Continued)										
<i>Current Types</i>										
A2087*	4.4	0.64	200	20	—	—	—	—	B7G	80
CV2341*	5.0	4.0	400	200	—	—	—	—	Coaxial	
CV2398*	6.0	1.15	200	85	—	—	—	—	B9A	69
EB91/D77	6.3	0.3	120	5.0	2	2.2	2.2	0.025	B7G	18
* Noise generators.										
HIVAC										
<i>Obsolete Types</i>										
7A3	1.4	0.15	117	0.5	1	0.4	—	—	B7G	13
ACDD	4.0	1.0	—	—	2	3.0	2.4	0.4	B5	3
MARCONI										
<i>Obsolete Types</i>										
D41	4.0	0.3	—	—	2	3.5	2.5	0.5	B5	3
D152	6.3	0.3	150	9.0	2	3.0	3.0	0.03	B7G	18
<i>Replacement Types</i>										
D42	4.0	0.6	75	15.0	1	4.0	—	—	B4	8
D43	4.0	0.6	75	15.0	1	4.0	—	—	B4	1
D63	6.3	0.3	100	2.0	2	6.0	7.0	0.18	IO	53
<i>Current Type</i>										
EB91/D77	6.3	0.3	120	5.0	2	3.5	3.5	0.025	B7G	18
MULLARD										
<i>Obsolete Types</i>										
2D2	2.0	0.09	90	0.5	2	2.8	2.8	<0.5	B5	3
2D4A	4.0	0.65	200	0.8	2	4.5	4.5	<0.5	B5	3
2D4B	4.0	0.35	200	0.8	2	3.8	3.9	<0.07	B7	21
T4D	4.0	0.2	50	5.0	1	2.1	—	—	B3G	1
EAB1	6.3	0.2	200	0.8	3	1.5	1.35	<0.65	C18	17
EB4	6.3	0.2	200	0.8	2	1.2	1.2	<0.2	C18	10
2D13C	13.0	0.2	200	0.8	2	4.5	4.5	0.3	B5	3
<i>Replacement Types</i>										
EA50	6.3	0.15	50	5.0	1	2.1	—	—	B3G	1
EB34	6.3	0.2	200	0.8	2	4.5	4.5	0.5	IO	53
EB41	6.3	0.3	150	9.0	2	<0.01	<0.01	<0.03	B8A	10
UB41	19.0	0.1	150	9.0	2	<0.01	<0.01	<0.03	B8A	10
<i>Current Types</i>										
DA90	1.4	0.15	117	0.5	1	0.4	—	—	B7G	13
6AL5	6.3	0.3	117	9.0	2	3.1	3.1	50.026	B7G	18
M8212										
EA76	6.3	0.15	150	9.0	1	2.5	—	—	B5B	1
EB91	6.3	0.3	150	9.0	2	3.0	3.0	<0.025	B7G	18
M8079 (SQ)										
TUNGSRAM										
<i>Obsolete Types</i>										
D418	4.0	0.18	100	5.0	1	7.0	—	—	B4	10
DD4	4.0	0.65	200	0.8	2	4.0	4.0	0.5	B5	3
DD4D	4.0	0.4	100	4.0	2	4.5	4.5	4	B7	21
DD465	4.0	0.65	200	0.8	2	—	—	—	B5	4
6H6	6.3	0.3	150	8.0	2	3.0	4.0	0.1	IO	53
DD6	6.3	0.2	200	0.8	2	3.5	3.5	0.5	B5	3
DD6G	6.3	0.3	165	10.0	2	3.0	3.0	0.016	B7G	18
EAB1	6.3	0.2	200	0.8	3	2.25	1.0	0.4	C18	17
EB4	6.3	0.2	100	0.8	2	1.2	1.2	0.2	C18	10
DD818	8.0	0.18	100	1.5	2	—	—	—	B5	4
DD13	13.0	0.2	200	0.8	2	4.0	4.0	0.5	B5	3
<i>Current Type</i>										
6AL5	6.3	0.3	150	9.0	2	3.2	3.2	0.026	B7G	18
AMERICAN										
<i>Current Types</i>										
1R4	1.4*	0.15	30	0.34	1	2.4	—	—	B8B	23
6AN6	6.3	0.2	75	3.5	4	—	—	—	B7G	38
6H4	6.3	0.15	100	4.0	1	—	—	—	IO	56
6H6	6.3	0.3	150	8.0	2	3.0	4.0	0.1	IO	53
7A6	6.3	0.15	150	10.0	2	2.0	2.6	0.1	B8B	11
7C4	6.3	0.15	150	8.0	1	0.85	—	—	B8B	23
12H6	12.6	0.3	150	8.0	2	3.0	4.0	0.1	IO	53
12AL5	12.6	0.15	150	9.0	2	3.2	3.2	0.026	B7G	18

SEMICONDUCTOR DIODES

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current at +1V (mA)	Application	Connections		
				-10V	-50V					
A.E.I.										
<i>Obsolete Types</i>										
CG1-E	Germanium	65	30	—	<1,000	>4	General-purpose diode	} Wire ended		
CG4-E	Germanium	80	30	—	<100	>3.3			High-voltage general-purpose diode	
CG6-E	Germanium	70	30	<50	—	>2	TV g.p. diode			
CG10-E	Germanium	100	30	<50	<250	>2	High-voltage general-purpose diode			
CG12-E	Germanium	25	30	<200	—	>3.3	TV detector diode			
<i>Current Types</i>										
CG60H	Germanium	150	30	<10	<35	>3	} General purpose			
CG61H	Germanium	100	30	<10	<50	>3				
CG62H	Germanium	100	30	<20	<100	>3				
CG63H	Germanium	100	30	<40	<200	>3				
CG64H	Germanium	45	30	<200	—	>3	TV detector			
Frequency converters ; CS2A, CS3A (single plug) ; CS3B, CS9B (coaxial), and detector CS4B (coaxial)										
BRIMAR										
<i>Current Types</i>										
GD3	Germanium	25	30	-200	—	3	Vision and sound detector	} Axial lead wires		
GD4	Germanium	50	30	-40	—	3	Detector and noise limiter			
GD5	Germanium	85	30	-20	—	3	Detector and noise limiter			
M1	Selenium	68	0.25	—	—	0.5*	R.f. rectifier	} Wires		
M3	Selenium	68	1	—	—	4*	L.f. rectifier			
* At +5 volts.										
EDISWAN MAZDA										
<i>Current Types</i>										
XD201	Germanium	—	—	—	—	>0.1†	A.v.c. clamping diode in transistor receivers	Wire ended		
XD202	Germanium	—	—	—	—	>4.3	Signal detector in transistor receivers	Wire ended		
† At 0.3V.										
FERRANTI										
<i>Current Types</i>										
ZS7	} Silicon junction	30	100	—	<0.1†	—	} General purpose diodes	} Wires—single ended		
ZS8		30	100	—	<0.005†	—				
ZS10A		60	100	<0.05	0.05	100*	} Magnetic amplifiers, demodulators, etc.			
ZS10B		60	100	<0.5	0.5	100*				
ZS20A		120	100	<0.05	0.05	100*				
ZS20B		120	100	<0.5	0.5	100*				
ZS21		200	100	—	0.5†	100	} High-speed switching			
ZS22		300	100	—	<0.5†	100				
ZS40		25	25	—	<0.5†	—				
ZS41		50	25	—	<0.5†	—				
ZS42		100	25	—	<0.5†	—				
ZW2		10	100	—	<0.5†	—			Surge limiter	
† At P.I.V.										
G.E.C.										
<i>Obsolete Types</i>										
GEX55/1	Germanium	>75	30	—	<200	>1	} General purpose	} Cathode end red		
GEX54/4	Germanium	>170	30	—	<500 at -150V	>2				
<i>Current Types</i>										
GEX34	} Germanium point-contact	50	30	7	80	3.5	} TV detector	} Cathode end red		
GEX35		25	30	35	—	4				
GEX36		25	30	<100	—	5†	} Ring modulator			
GEX37		25	30	<60	—	10				
GEX39		25	30	60	—	20	} High-efficiency r.f. diodes			
GEX45/1		50	30	8	200	6				
GEX54		80	30	3	45	6	} General purpose			
GEX58		100	30	3	40	6				
GEX64		—	30	—	—	5††	} High-voltage diodes			
GEX66		—	30	—	—	5††				
†† At P.I.V.										

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current at +1V (mA)	Application	Connections
				-10V	-50V			

G.E.C. (continued)

Current Types (Continued)

SVC1	Silicon	20	200	10 μ A at -20V		100**	Variable capacitance diodes for a.f.c., etc.	Cathode lead red
SVC2	Silicon	20	200					
SVC3	Silicon	20	200					
SX780	Silicon	25	50	50†††	—	10**	High-speed switching	Cathode lead red
SX781	Silicon	60	50	50***	—			
SX782	Silicon	120	50	50†††	—			
††† At 25V 100°C. *** At 60V 100°C. ††† At 120V 100°C. ** At less than +1.5V. ‡ At 0.7V. †† At 0.25V. ††† At 0.5V.								

MULLARD

Obsolete Types

OA60	Germanium	30	5.0	—	—	—	Video signal detector	Wires. Coloured band at positive end	
OA61	Germanium	100	5.0	—	—	—			
OA71	Germanium		Replaced by OA81						D.c.r., sync. clipper
Current Types									
OA7	Germanium	25	140	1.5	6.0 (at -25V)	250	High speed switching	Wires. Cathode adjacent to red dot	
OA10	Germanium	30	50	<5 (at -3V)	<10 (at -20V)	—	Pulse circuits. Has low hole storage		
OA47	Germanium	25	50	4.5	30 (at -25V)	—	High speed switching		
OA70	Germanium	22.5	50	—	—	—	Video signal detector		
OA73	Germanium	30	50*	100	1,200 (at -30V)	8	—		
OA79 (2-OA79)	Germanium	45	4	4.5	90 (at -45V)	4	A.m./f.m. detectors		
OA81	Germanium	115	50*	4	18	6	General purpose		
OA85	Germanium	115	50*	7	20	8	General purpose		
OA86	Germanium	90	35*	2.5	22	> 5	Computing		
OA90	Germanium	30	10	20	300 (at -30V)	10	G.P. industrial		
OA91	Germanium	115	50*	4	17	7	G.P. industrial		
OA95	Germanium	115	50*	2.5	12	9	G.P. industrial		

* Averaged over any 50ms period or d.c. component, at an ambient temperature of 25°C with zero inverse voltage. At higher ambient temperatures, and when appreciable inverse voltages occur during part of the cycle, a derating must be applied.

S.T.C.

Replacement Types

2X102/G	Germanium	85	15	6	33	2.5	Audio and low r.f. rectifier	Axial lead wires
2X103/G	Germanium	30	40	5	—	5		
2X104/G	Germanium	30	40	20	—	3		
2X105/G	Germanium	100	25	5	45	4		
2X106/G	Germanium	70	50	50	450	7		

Current Types

GD8	Germanium	85	30	7	—	5	Industrial interference limiter	Wires
GD9	Germanium	125	50	—	50	9		
GD10	Germanium	150	40	—	40	7.5		
GD11	Germanium	50	100	—	—	10-20		
GD12	Germanium	25	40	—	—	—		

TEXAS

Current Types

IS121	Diffused silicon	150	50	<0.1 (at -150V)	—	—	General purpose	Axial wires. Colour code at cathode
IS914	Diffused silicon "mesa" computer diodes	75	75	<5 (at -75V)	—	—	V.H.F. operation due to very short recovery times	Axial wires. Colour code at cathode. Glass seal.
IS916		75	75	<5 (at -75V)	—	—		

Type	Nature	Peak Current (mA)	Valley Current (mA)	Working slope resistance (Ω)	Resistive cut-off frequency (Mc/s)	Applications	Connections
IN650	Gallium arsenide tunnel diodes metal case	10	0.5	-20	870	Very high-frequency oscillators, amplifiers and pulse circuits	Reading clockwise from tab; anode, anode, cathode (case)
IN651		10	0.5	-20	870		
IN652		5	0.5	-40	620		
IN653		5	0.5	-40	415		

Type	Nature	Maximum Voltage	Sensitivity (μ A/ft-candle)	Dark Current (μ A)	Applications	Connections
IS701	Diffused silicon photo-duo-diode	± 50	0.6	0.01	Reading punched tapes at up to 20 k/s	Two wires at one end, reversible, glass seal

Semiconductor Diodes

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current at +1V (mA)	Application	Connections
				-10V	-50V			
WESTINGHOUSE								
<i>Current Types</i>								
39K1	Selenium	85	0.1	100 (max.) at -60V.	0.8 (min.) at + 1.7V.	High-voltage low-power detectors	—	Wires
39K2		170	0.1	100 (max.) at -120V.	0.8 (min.) at + 3.4V.			Wires
39MA1		85	0.1	100 (max.) at -60V.	0.8 (min.) at + 1.7V.			Wires
39MA2		170	0.1	100 (max.) at -120V.	0.8 (min.) at + 3.4V.			Wires
39MA3		225	0.1	100 (max.) at -180V.	0.8 (min.) at + 5.1V.			Wires
39MA4		340	0.1	100 (max.) at -240V.	0.8 (min.) at + 6.8V.			Wires
310EA1		60	0.01 (mean)	0.05 (max.)	10 (max.)	0.04 (min.)	Very high impedance detector	Wires
KF1	Copper oxide	6	1	100 (max.) at -6V.	1 (min.) at + 0.7V.	Instrument rectifiers, modulators etc.	—	Wires
KF2	Copper oxide	12	1	100 (max.) at -12V.	1 (min.) at + 1.4V.			Wires
KF4	Copper oxide	24	1	100 (max.) at -24V.	1 (min.) at + 2.8V.			Wires
KF6	Copper oxide	36	1	100 (max.) at -36V.	1 (min.) at + 4.2V.			Wires
KG1	Copper oxide	6	5	175 (max.) at -6V.	5 (min.) at + 0.7V.	Instrument rectifiers, modulators etc.	—	Wires
KG2	Copper oxide	12	5	175 (max.) at -12V.	5 (min.) at + 1.4V.			Wires
KG4	Copper oxide	24	5	175 (max.) at -24V.	5 (min.) at + 2.8V.			Wires
KG6	Copper oxide	36	5	175 (max.) at -36V.	5 (min.) at + 4.2V.			Wires
KH1	Copper oxide	6	10	300 (max.) at -6V.	10 (min.) at + 0.7V.	Instrument rectifiers, modulators etc.	—	Wires
KH2	Copper oxide	12	10	300 (max.) at -12V.	10 (min.) at + 1.4V.			Wires
KH4	Copper oxide	24	10	300 (max.) at -24V.	10 (min.) at + 2.8V.			Wires
KH6	Copper oxide	36	10	300 (max.) at -36V.	10 (min.) at + 4.2V.			Wires
W1	Copper oxide	6	0.25	50 (max.) at -6V.	5 (min.) at + 2.4V.	Detectors, a.g.c. noise suppressors, clippers, etc.	—	Wires
W2	Copper oxide	12	0.25	50 (max.) at -12V.	5 (min.) at + 4.8V.			Wires
W3	Copper oxide	18	0.25	50 (max.) at -18V.	5 (min.) at + 7.2V.			Wires
W4	Copper oxide	24	0.25	50 (max.) at -24V.	5 (min.) at + 9.6V.			Wires
W5	Copper oxide	30	0.25	50 (max.) at -30V.	5 (min.) at + 12.0V.			Wires
W6	Copper oxide	36	0.25	50 (max.) at -36V.	5 (min.) at + 14.4V.			Wires
W7	Copper oxide	42	0.25	50 (max.) at -42V.	5 (min.) at + 16.8V.			Wires
W8	Copper oxide	48	0.25	50 (max.) at -48V.	5 (min.) at + 19.2V.			Wires
W9	Copper oxide	54	0.25	50 (max.) at -54V.	5 (min.) at + 21.6V.			Wires
W10	Copper oxide	60	0.25	50 (max.) at -60V.	5 (min.) at + 24.0V.			Wires
W11	Copper oxide	66	0.25	50 (max.) at -66V.	5 (min.) at + 26.4V.			Wires
W12	Copper oxide	72	0.25	50 (max.) at -72V.	5 (min.) at + 28.8V.			Wires
W13	Copper oxide	78	0.25	50 (max.) at -78V.	5 (min.) at + 31.2V.			Wires
W14	Copper oxide	84	0.25	50 (max.) at -84V.	5 (min.) at + 33.6V.			Wires
W15	Copper oxide	90	0.25	50 (max.) at -90V.	5 (min.) at + 36.0V.			Wires
WG4A	Germanium	20	50 (mean)	1,000 (max.)	—	2 (min.)	Video detector	Wires
WG4B	Germanium	20	50 (mean)	1,000 (max.)	—	10 (min.)	Crystal receiver det.	Wires
WG5A	Germanium	40	50 (mean)	100 (max.)	—	1 (min.)	Television sound det.	Wires
WG5B	Germanium	60	50 (mean)	100 (max.)	1,000 (max.)	5 (min.)	Television video and sound detector	Wires
WG6A	Germanium	60	50 (mean)	30 (max.)	600 (max.)	1 (min.)	Television noise limiter video and sound	Wires
WG7B	Germanium	40	50 (mean)	10 (max.)	—	5 (min.)	Instrument rectifier	Wires
WG7C	Germanium	100	50 (mean)	10 (max.)	200 (max.)	5 (min.)	General purpose	Wires
WG7D	Germanium	100	50 (mean)	10 (max.)	100 (max.)	3 (min.)	D.c. restorer, sync separator, f.m. disc	Wires
WX1	Copper oxide	6	0.1	12 (max.) at -6V.	0.5 (min.) at + 2.4V.	Detectors, a.g.c. noise suppressors, clippers, etc.	—	Wires
WX2	Copper oxide	12	0.1	12 (max.) at -12V.	0.5 (min.) at + 4.8V.			Wires
WX3	Copper oxide	18	0.1	12 (max.) at -18V.	0.5 (min.) at + 7.2V.			Wires
WX4	Copper oxide	24	0.1	12 (max.) at -24V.	0.5 (min.) at + 9.6V.			Wires
WX5	Copper oxide	30	0.1	12 (max.) at -30V.	0.5 (min.) at + 12.0V.			Wires
WX6	Copper oxide	36	0.1	12 (max.) at -36V.	0.5 (min.) at + 14.4V.			Wires
WX7	Copper oxide	42	0.1	12 (max.) at -42V.	0.5 (min.) at + 16.8V.			Wires
WX8	Copper oxide	48	0.1	12 (max.) at -48V.	0.5 (min.) at + 19.2V.			Wires
WX9	Copper oxide	54	0.1	12 (max.) at -54V.	0.5 (min.) at + 21.6V.			Wires
WX10	Copper oxide	60	0.1	12 (max.) at -60V.	0.5 (min.) at + 24.0V.			Wires
WX11	Copper oxide	66	0.1	12 (max.) at -66V.	0.5 (min.) at + 26.4V.			Wires
WX12	Copper oxide	72	0.1	12 (max.) at -72V.	0.5 (min.) at + 28.8V.			Wires
WX13	Copper oxide	78	0.1	12 (max.) at -78V.	0.5 (min.) at + 31.2V.			Wires
WX14	Copper oxide	84	0.1	12 (max.) at -84V.	0.5 (min.) at + 33.6V.			Wires
WX15	Copper oxide	90	0.1	12 (max.) at -90V.	0.5 (min.) at + 36.0V.			Wires

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current at +1V (mA)	Application	Connections
				-10V	-50V			
G.E.C. (continued)								
<i>Current Types (Continued)</i>								
SVC1	Silicon	20	200	10 μ A at -20V		100**	Variable capacitance diodes for a.f.c., etc.	Cathode lead red
SVC2	Silicon	20	200					
SVC3	Silicon	20	200					
SX780	Silicon	25	50	50 $\ddagger\ddagger$	—	10**	High-speed switching	Cathode lead red
SX781	Silicon	60	50	50***	—			
SX782	Silicon	120	50	50 $\ddagger\ddagger$	—			
$\ddagger\ddagger$ At 25V 100°C. *** At 60V 100°C. $\ddagger\ddagger\ddagger$ At 120V 100°C. ** At less than +1.5V. † At 0.7V. †† At 0.25V. ††† At 0.5V.								

MULLARD*Obsolete Types*

OA60	Germanium	30	5.0	—	—	—	Video signal detector	Wires. Coloured band at positive end
OA61	Germanium	100	5.0	—	—	—	D.c.r., sync. clipper	
OA71	Germanium		Replaced by OA81					
<i>Current Types</i>								
OA7	Germanium	25	140	1.5	6.0 (at -25V)	250	High speed switching	Wires. Cathode adjacent to red dot
OA10	Germanium	30	50	<5 (at -3V)	<10 (at -20V)	—	Pulse circuits. Has low hole storage	
OA47	Germanium	25	50	4.5	30 (at -25V)	—	High speed switching	
OA70	Germanium	22.5	50	—	—	—	Video signal detector	
OA73	Germanium	30	50*	100	1,200 (at -30V)	8	—	
OA79 (2-OA79)	Germanium	45	4	4.5	90 (at -45V)	4	A.m./f.m. detectors	
OA81	Germanium	115	50*	4	18	6	General purpose	
OA85	Germanium	115	50*	7	20	8	General purpose	
OA86	Germanium	90	35*	2.5	22	> 5	Computing	
OA90	Germanium	30	10	20	300 (at -30V)	10	G.P. industrial	
OA91	Germanium	115	50*	4	17	7	G.P. industrial	
OA95	Germanium	115	50*	2.5	12	9	G.P. industrial	

* Averaged over any 50ms period or d.c. component, at an ambient temperature of 25°C with zero inverse voltage. At higher ambient temperatures, and when appreciable inverse voltages occur during part of the cycle, a derating must be applied.

S.T.C.*Replacement Types*

2X102/G	Germanium	85	15	6	33	2.5	Audio and low r.f. rectifier	Axial lead wires
2X103/G	Germanium	30	40	5	—	5		
2X104/G	Germanium	30	40	20	—	3		
2X105/G	Germanium	100	25	5	45	4		
2X106/G	Germanium	70	50	50	450	7		
<i>Current Types</i>								
GD8	Germanium	85	30	7	—	5	Industrial Interference limiter	Wires
GD9	Germanium	125	50	—	50	9		
GD10	Germanium	150	40	—	40	7.5		
GD11	Germanium	50	100	—	—	10-20		
GD12	Germanium	25	40	—	—	—		

TEXAS*Current Types*

IS121	Diffused silicon	150	50	<0.1 (at -150V)		—	General purpose	Axial wires. Colour code at cathode
IS914	Diffused silicon "mesa" computer diodes	75	75	<5 (at -75V)		—	V.H.F. operation due to very short recovery times	Axial wires. Colour code at cathode. Glass seal.
IS916		75	75	<5 (at -75V)		—		

Type	Nature	Peak Current (mA)	Valley Current (mA)	Working slope resistance (Ω)	Resistive cut-off frequency (Mc/s)	Applications	Connections
IN650	Gallium arsenide tunnel diodes metal case	10	0.5	-20	870	Very high-frequency oscillators, amplifiers and pulse circuits	Reading clockwise from tab; anode, anode, cathode (case)
IN651		10	0.5	-20	870		
IN652		5	0.5	-40	620		
IN653		5	0.5	-40	415		

Type	Nature	Maximum Voltage	Sensitivity (μ A/ft-candle)	Dark Current (μ A)	Applications	Connections
1S701	Diffused silicon photo-duo-diode	± 50	0.6	0.01	Reading punched tapes at up to 20 kc/s	Two wires at one end, reversible, glass seal

Semiconductor Diodes

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current at +1V (mA)	Application	Connections
				-10V	-50V			
WESTINGHOUSE								
<i>Current Types</i>								
39K1	Selenium	85	0.1	100 (max.) at -60V.		0.8 (min.) at + 1.7V.	High-voltage low-power detectors	Wires
39K2		170	0.1	100 (max.) at -120V.		0.8 (min.) at + 3.4V.		Wires
39MA1		85	0.1	100 (max.) at -60V.		0.8 (min.) at + 1.7V.		Wires
39MA2		170	0.1	100 (max.) at -120V.		0.8 (min.) at + 3.4V.		Wires
39MA3		225	0.1	100 (max.) at -180V.		0.8 (min.) at + 5.1V.		Wires
39MA4		340	0.1	100 (max.) at -240V.		0.8 (min.) at + 6.8V.		Wires
310EA1		60	0.01 (mean)	0.05 (max.)	10 (max.)	0.04 (min.)	Very high impedance detector.	Wires
KF1	Copper oxide	6	1	100 (max.) at -6V.		1 (min.) at + 0.7V.	Instrument rectifiers, modulators etc.	Wires
KF2	Copper oxide	12	1	100 (max.) at -12V.		1 (min.) at + 1.4V.		Wires
KF4	Copper oxide	24	1	100 (max.) at -24V.		1 (min.) at + 2.8V.		Wires
KF6	Copper oxide	36	1	100 (max.) at -36V.		1 (min.) at + 4.2V.		Wires
KG1	Copper oxide	6	5	175 (max.) at -6V.		5 (min.) at + 0.7V.	Instrument rectifiers, modulators etc.	Wires
KG2	Copper oxide	12	5	175 (max.) at -12V.		5 (min.) at + 1.4V.		Wires
KG4	Copper oxide	24	5	175 (max.) at -24V.		5 (min.) at + 2.8V.		Wires
KG6	Copper oxide	36	5	175 (max.) at -36V.		5 (min.) at + 4.2V.		Wires
KH1	Copper oxide	6	10	300 (max.) at -6V.		10 (min.) at + 0.7V.	Instrument rectifiers, modulators etc.	Wires
KH2	Copper oxide	12	10	300 (max.) at -12V.		10 (min.) at + 1.4V.		Wires
KH4	Copper oxide	24	10	300 (max.) at -24V.		10 (min.) at + 2.8V.		Wires
KH6	Copper oxide	36	10	300 (max.) at -36V.		10 (min.) at + 4.2V.		Wires
W1	Copper oxide	6	0.25	50 (max.) at -6V.		5 (min.) at + 2.4V.	Detectors, a.g.c. noise suppressors, clippers, etc.	Wires
W2	Copper oxide	12	0.25	50 (max.) at -12V.		5 (min.) at + 4.8V.		Wires
W3	Copper oxide	18	0.25	50 (max.) at -18V.		5 (min.) at + 7.2V.		Wires
W4	Copper oxide	24	0.25	50 (max.) at -24V.		5 (min.) at + 9.6V.		Wires
W5	Copper oxide	30	0.25	50 (max.) at -30V.		5 (min.) at +12.0V.		Wires
W6	Copper oxide	36	0.25	50 (max.) at -36V.		5 (min.) at +14.4V.		Wires
W7	Copper oxide	42	0.25	50 (max.) at -42V.		5 (min.) at +16.8V.		Wires
W8	Copper oxide	48	0.25	50 (max.) at -48V.		5 (min.) at +19.2V.		Wires
W9	Copper oxide	54	0.25	50 (max.) at -54V.		5 (min.) at +21.6V.		Wires
W10	Copper oxide	60	0.25	50 (max.) at -60V.		5 (min.) at +24.0V.		Wires
W11	Copper oxide	66	0.25	50 (max.) at -66V.		5 (min.) at +26.4V.		Wires
W12	Copper oxide	72	0.25	50 (max.) at -72V.		5 (min.) at +28.8V.		Wires
W13	Copper oxide	78	0.25	50 (max.) at -78V.		5 (min.) at +31.2V.		Wires
W14	Copper oxide	84	0.25	50 (max.) at -84V.		5 (min.) at +33.6V.		Wires
W15	Copper oxide	90	0.25	50 (max.) at -90V.		5 (min.) at +36.0V.		Wires
WG4A	Germanium	20	50 (mean)	1,000 (max.)	—	2 (min.)	Video detector	Wires
WG4B	Germanium	20	50 (mean)	1,000 (max.)	—	10 (min.)	Crystal receiver det.	Wires
WG5A	Germanium	40	50 (mean)	100 (max.)	—	1 (min.)	Television sound det.	Wires
WG5B	Germanium	60	50 (mean)	100 (max.)	1,000 (max.)	5 (min.)	Television video and sound detector	Wires
WG6A	Germanium	60	50 (mean)	30 (max.)	600 (max.)	1 (min.)	Television noise limiter	Wires
WG7B	Germanium	40	50 (mean)	10 (max.)	—	5 (min.)	video and sound instrument rectifier	Wires
WG7C	Germanium	100	50 (mean)	10 (max.)	200 (max.)	5 (min.)	General purpose	Wires
WG7D	Germanium	100	50 (mean)	10 (max.)	100 (max.)	3 (min.)	D.c. restorer, sync. separator, f.m. disc	Wires
WX1	Copper oxide	6	0.1	12 (max.) at -6V.		0.5 (min.) at + 2.4V.	Detectors, a.g.c. noise suppressors, clippers, etc.	Wires
WX2	Copper oxide	12	0.1	12 (max.) at -12V.		0.5 (min.) at + 4.8V.		Wires
WX3	Copper oxide	18	0.1	12 (max.) at -18V.		0.5 (min.) at + 7.2V.		Wires
WX4	Copper oxide	24	0.1	12 (max.) at -24V.		0.5 (min.) at + 9.6V.		Wires
WX5	Copper oxide	30	0.1	12 (max.) at -30V.		0.5 (min.) at +12.0V.		Wires
WX6	Copper oxide	36	0.1	12 (max.) at -36V.		0.5 (min.) at +14.4V.		Wires
WX7	Copper oxide	42	0.1	12 (max.) at -42V.		0.5 (min.) at +16.8V.		Wires
WX8	Copper oxide	48	0.1	12 (max.) at -48V.		0.5 (min.) at +19.2V.		Wires
WX9	Copper oxide	54	0.1	12 (max.) at -54V.		0.5 (min.) at +21.6V.		Wires
WX10	Copper oxide	60	0.1	12 (max.) at -60V.		0.5 (min.) at +24.0V.		Wires
WX11	Copper oxide	66	0.1	12 (max.) at -66V.		0.5 (min.) at +26.4V.		Wires
WX12	Copper oxide	72	0.1	12 (max.) at -72V.		0.5 (min.) at +28.8V.		Wires
WX13	Copper oxide	78	0.1	12 (max.) at -78V.		0.5 (min.) at +31.2V.		Wires
WX14	Copper oxide	84	0.1	12 (max.) at -84V.		0.5 (min.) at +33.6V.		Wires
WX15	Copper oxide	90	0.1	12 (max.) at -90V.		0.5 (min.) at +36.0V.		Wires

POINT CONTACT TRANSISTORS

Type	P_c max. (mW)	V_c max. (V)	I_c max. (mA)	I_e max. (mA)	R_b (Ω)	r_e (Ω)	r_c (k Ω)	r_{oi} (Ω)	r_a	Connections
G.E.C.										
<i>Obsolete Types</i>										
GET1	100	-50	-15	—	—	—	—	—	2.5	} Base, single lead ; collector coded blue
GET2	75	-30	-15	—	55	—	—	—	3.8	
MULLARD										
<i>Obsolete Types</i>										
OC50	120	-30	-12 to +20	-1 to +10	—	—	—	—	2.1	} Base, metal casing Emit. straight pin Coll., bent pin
OC51	100	-50	-15	12	—	—	—	—	2.2	
S.T.C.										
<i>Replacement Types</i>										
TP1	150	-50	-30	30	135	200	20	60	3	} Emitter : red collector : black
TP2	150	-50	-30	30	110	140	25	75	3	

SYMMETRICAL TRANSISTORS

Type	p-n-p. or n-p-n.	P_c max. (mW)	V_c max. (V)	I_c max. (mA)	Small Signal Parameters							Connections	
					V_c (V)	I_c (mA)	r_e' (Ω)	r_b' (Ω)	r_c' (k Ω)	α'	I_{eo} (μ A)		f_{ca} (kc/s)
EDISWAN MAZDA													
<i>Current Type</i>													
XSI01	p-n-p	150	12	—	5	1	6.8	460	45	20	5_{max}	$2,500_{min}$	Base, centre lead
S.T.C.													
<i>Replacement Types</i>													
TS4	p-n-p	50	> 30*	50	0.5	20	—	—	—	> 10	-10 max.†	—	} Em.-Em. diametrically opposite Col. white. Base emitter c/wkwise E, C interchangeable. Collector bevelled.
TS7	p-n-p	70	12	**	6	1 (Bidirectional R.F. transistor)	—	—	—	35	10_{max}	4,500	
TS8	p-n-p	70	6	**	6	1 (Bidirectional R.F. transistor)	—	—	—	60	10_{max}	8,500	
TK20	p-n-p	200	12	**	4.5	1	—	—	—	40	0.7	6,000	
TK21	p-n-p	200	20	**	9.0	1	—	—	—	22	0.5	2,000	
TK24	p-n-p	200	20	**	12.0	1	—	—	—	40	1.5	3,000	
TK25	p-n-p	200	20	**	9.0	1	—	—	—	60	0.7	11,000	

* This figure is not a max. rating, but refers to min. collector turnover at $I_b = 0$. † At $V_b = +1V$, $V_c = -30V$.

** Limited only by collector dissipation and the fall in current gain at high current.

JUNCTION TRANSISTORS

Type	p-n-p or n-p-n	P_c max. (mW)	V_c max. (V)	I_c max. (mA)	Small Signal Parameters							Connections	
					V_c (V)	I_c (mA)	r_e' (Ω)	r_b' (Ω)	r_c' (k Ω)	α'	I_{eo} (μ A)		f_{ca} (kc/s)
A.E.I.													
<i>Obsolete Types</i>													
GT1	p-n-p	125	9	*	4.5	1	20	700	55	20	5	800	} Base centre lead Collector coded white
GT2	p-n-p	125	9	*	4.5	1	20	1,000	50	40	5	900	
GT3	p-n-p	125	9	*	4.5	1	20	1,300	40	60	5	1,000	
GT11	p-n-p	100	9	*	4.5	1	15	430	50	30	5	4,000	
GT12	p-n-p	100	9	*	4.5	1	12	850	40	60	5	6,000	
GT13	p-n-p	100	9	*	4.5	1	10	1,700	33	100	5	9,000	
* The maximum current is limited by collector dissipation and permissible distortion.													
<i>Current Types</i>													
GT40	p-n-p	100	15	100	4.5	1	—	—	—	30	2	2,500	} Base centre lead Collector coded white
GT41	p-n-p	100	15	100	4.5	1	15	430	50	30	2	4,000	
GT42	p-n-p	100	15	100	4.5	1	12	850	40	60	2	6,000	
GT43	p-n-p	100	15	100	4.5	1	10	1,700	33	100	2	9,000	
GT44	p-n-p	100	25	100	4.5	1	—	—	—	30	2	2,500	
GT45	p-n-p	100	25	100	4.5	1	15	430	50	30	2	4,000	
GT46	p-n-p	100	25	100	4.5	1	12	850	40	60	2	6,000	
GT47	p-n-p	100	25	100	4.5	1	10	1,700	33	100	2	9,000	

(Continued)

Junction Transistors

Type	p-n-p or n-p-n	P _c max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters								Connections
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _c ' (kΩ)	α'	I _{eo} (μA)	f _{ca} (kc/s)	
EDISWAN MAZDA													
<i>Current Types</i>													
XA101	p-n-p	120	-20 -16**	—	5	1	8.5	790	40	35	5 _{max}	5,000	Base centre lead Collector coded white
XA102	p-n-p	120	-20 -16**	—	5	1	8.1	1,230	38	60	5 _{max}	8,000	
XA111	p-n-p	120	-20 -16**	—	5	1	8.5	790	40	35	5 _{max}	5,000	Clockwise, emitter, base, collector. Collector coded arrow
XA112	p-n-p	120	-20 -16**	—	5	1	8.1	1,230	38	60	5 _{max}	8,000	
XA121	p-n-p	80	-25	10	12	1	I.f. amplifier 250-500 kc/s			60	8 _{max}	—	Emitter, base, shield and collector in line. Shield and collector wider spacing
XA122	p-n-p	80	-25	10	12	1	Freq. changer m.w. & l.w.			60	8 _{max}	—	
XA123	p-n-p	80	-20	10	12	1	R.f. stage or mixer			60	20 _{max}	30,000	
XA124	p-n-p	80	-20	10	12	1	Frequency changer			60	20 _{max}	30,000	
XA125	p-n-p	80	-18	10	12	1	—	—	—	60	4 _{max}	30,000	
XA126	p-n-p	80	-20	10	12	1	—	—	—	60	20 _{max}	30,000	
XA131	p-n-p	120	-40	10	12	1.5	—	—	—	60	12 _{max}	100,000	Clockwise, emitter, base, collector, shield. Tag between shield & emitter
XA141	p-n-p	120	-30	100	7	5	} Switching	} 45§	} 10 _{max}	} 30,000‡	} 10 _{max}	} 75,000‡	
XA142	p-n-p	120	-30	100	7	5							
XA143	p-n-p	120	-30	100	7	5							
XA151	p-n-p	130	-15	—	0.25	10							20 _{min} §
XA152	p-n-p	130	-15	—	0.25	10	40 _{min} §	10 _{max}	5,500 _{min}				
XA161	p-n-p	150	-13 -12**	100	0.3	10	50§	3 _{max}	40,000 _{min}	Clockwise, emitter, base, collector. Emitter near tag			
XA162	p-n-p	150	-13 -12**	100	0.3	10	50§	3 _{max}	60,000 _{min}				
XA701	n-p-n	120	25 15**	200	0.2	20	40§	8 _{max}	5,000 _{min}	Clockwise, emitter, base, collector. Collector coded arrow			
XA702	n-p-n	120	25 15**	200	0.2	20	50§	8 _{max}	7,000 _{min}				
XA703	n-p-n	120	25 15**	200	0.2	20	70§	8 _{max}	13,000 _{min}				
XB102	p-n-p	150	-35 -16** -35***	—	5	1	15	510	74	30	10 _{max}	—	Base centre lead, Collector coded white
XB103	p-n-p	150	-35 -16** -35***	—	5	1	21	740	46	66	10 _{max}	—	
XB104	p-n-p	120	-20 -16** -20***	—	5	1	—	—	—	30	10 _{max}	—	
XB112	p-n-p	150	-35 -16** -35***	—	5	1	15	510	74	30	10 _{max}	—	Clockwise, emitter, base, collector. Collector coded arrow
XB113	p-n-p	150	-35 -16** -35***	—	5	1	21	740	46	66	10 _{max}	—	
XB121	p-n-p	50	105	100	0.35	5	Switching control transistor			60§	14 _{max}	—	As XA161
XC101	p-n-p	165	-35 -16** -35***	—	6	8	2.1	280	10	66	10 _{max}	—	As XA101
XC121	p-n-p	250	-35 -16** -35***	—	1	200	—	—	—	74§	10 _{max}	—	As XA111
XC131	p-n-p	500††	-35 -16** -35***	—	1	200	—	—	—	74§	10 _{max}	—	As XC171
XC141	p-n-p	11,000	-40pk -20d.c.	3,000pk 1,500d.c.	1.5	0.7	—	—	—	62.5	—	—	Collector-flange Emitter and base marked
XC142	p-n-p	11,000	-60pk -30d.c.	3,000pk 1,500d.c.	1.5	0.7	—	—	—	62.5	—	—	

(Continued)

Type	p-n-p or n-p-n	P _c max. (mW)	V _e max. (V)	I _c max. (mA)	Small Signal Parameters							I _{co} (μA)	f _{on} (kc/s)	Connections
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _c ' (kΩ)	α'				
EDISWAN MAZDA (Continued) <i>Current Types (Continued)</i>														
XC171	p-n-p	750††	{ -26 -16** -26***	—	3	400	—	—	—	72§	10 _{max}	—	Clockwise, emitter, base, collector (arrow) Matched pair mounted in holder	
** Maximum collector to emitter voltage.			§ Static current amplification.			†† Mounted on 20 SWG aluminium			plate of 12 sq. in. minimum area					
*** Maximum collector to emitter voltage with R _b < 500Ω.			‡ f ₁ frequency at which modulus of h _{fe} is equal to unity. h _{fe} is small-signal fwd. I transfer ratio with o.p. short-circuited to a.c.			per transistor.								

FERRANTI <i>Current Types</i>												
ZT20	n-p-n	250	20	50	} Silicon. General purpose types suitable for high-speed switching, high-frequency oscillators etc.	20-40	0.5	50,000	} Clockwise, emitter, base, collector, wide gap between emitter & coll.			
ZT21	n-p-n	250	20	50		35-90	0.5	50,000				
ZT22	n-p-n	250	45	50		20-40	0.5	25,000				
ZT23	n-p-n	250	45	50		35-90	0.5	25,000				

G.E.C. <i>Obsolete Types</i>													
GET3	p-n-p	100	-15	250	6	1.0	25	400	2,000	55	6	1,000	} Coll. coded white, then clockwise base, emitter
GET4	p-n-p	50	-30	70	12	1	25	450	2,000	50	6	1,000	
GET5	p-n-p	200	-30	350	} Medium power			—	—	—	6	1,000	
GET6	p-n-p	50	-12	50	2	0.5	50	700	1,000	50	6	1,000	
GET15	p-n-p	600	-15	350	—	—	—	—	—	70	10	950	—
GET16	p-n-p	600	-30	350	—	—	—	—	—	60	10	900	—
GET20	p-n-p	600	-30	500	—	—	—	—	—	60	10	1,000	—
<i>Current Types</i>													
GET102	p-n-p	200‡	-30	1,000	} High gain			100	—	—	—	1,500	} Coloured sleeves.
GET103	p-n-p	200‡	-30	1,000	} General purpose			55	—	—	—	1,000	
GET104	p-n-p	200‡	-30	1,000	} Industrial			55	—	—	—	1,000	
GET105	p-n-p	800‡**	-40	1,000	} Medium power			30††	—	—	—	900	
GET106	p-n-p	200‡	-15	1,000	} Low noise			55	—	—	—	1,000	} Collector white.
GET110	p-n-p	800‡**	-40	1,000	} Medium power switching			20††	—	—	—	1,000	
GET111	p-n-p	200‡	-60	1,000	} High voltage			55	—	—	—	1,000	} Emitter red.
GET113	p-n-p	200‡	-15	1,000	} High gain			100	—	—	—	1,500	
GET114	p-n-p	200‡	-15	1,000	} General purpose			55	—	—	—	1,000	} Base green
GET115	p-n-p	800‡**	-15	1,000	} Medium power			{ 30††	—	—	—	1,000	
GET116	p-n-p	800‡**	-30	1,000	} Medium power			{ 30††	—	—	—	1,000	
GET120	p-n-p	800‡**	-30	1,000	} Medium power switching			20††	—	—	—	1,400	} Base, collector, emitter, gap, clockwise
GET571	p-n-p	18,000‡**	-16	12,000	} -1.5 6,000			30††	—	—	—	—	
GET572	p-n-p	18,000‡**	-32	12,000	} -1.5 6,000			30††	—	—	—	—	
GET573	p-n-p	18,000‡**	-64	12,000	} -1.5 6,000			30††	—	—	—	—	
GET691	p-n-p	45‡	-20	10	} I.F. amplifier			60	—	—	—	30,000	} Coloured sleeves.
GET692	p-n-p	45‡	-20	10	} R.F. and mixer			60	—	—	—	40,000	
GET871	p-n-p	75§	-15	150	} High-speed switching			{ 45††	—	—	—	6,000	} Collector white.
GET872	p-n-p	75§	-15	150	} High-speed switching			{ 65††	—	—	—	15,000	
GET873	p-n-p	75§	-15	10	} I.F. amplifier			50	—	—	—	6,000	} Emitter red.
GET874	p-n-p	75§	-15	10	} Mixer transistor			70	—	—	—	15,000	
GET875	p-n-p	75§	-15	150	} High-speed switching			90††	—	—	—	20,000	} Base green
† At T ambient = 45°C.	§ At T ambient = 35°C.		** Transistor mounted on cooling fin.		†† Large signal common emitter current gain.								

HIVAC <i>Obsolete Type</i>													
XFT2	p-n-p	50	12	10	3.0	0.5	50	860	3,500	49	4	460	Base, centre lead Coll. coded red

MULLARD <i>Obsolete Type</i>													
OC16	p-n-p	6,250†	32††	1,500 (R _b < 200Ω)	7	300	—	—	—	45**	20 (at V _e = 14V)	200	Base, centre lead. Coll. stands apart
<i>Current Types</i>													
AFZ11	p-n-p	50	-20	10	-6.0	1.0	—	15	< 50	4.0 (at V _e = -6V)	14,000§	—	} Collector lead stands apart, shield is base, emitter
ASZ20	p-n-p	100	-40	15	-6.0	1.0	—	> 120	—	30	2.0	> 40,000	
ATZ10	p-n-p-n	15†	-35	25	-1.0	—	—	—	—	2.1 (d)	< 50 (V _e = 10)	—	} Base centre lead, Collector coded red
BCZ11	p-n-p	210†	-25	50	-6.0	1.0	25	125	—	35	< 0.1 (V _e = -10)	1,500	

(Continued)

Junction Transistors

Type	p-n-p or n-p-n	P _e max. (mW)	V _c max. (V)	I _e max. (mA)	Small Signal Parameters							Connections	
					V _c (V)	I _e (mA)	r _e ' (Ω)	r _b ' (Ω)	r _c ' (kΩ)	a'	I _{eo} (μA)		f _{co} (kc/s)
MULLARD (Continued)													
<i>Current Types (Continued)</i>													
OC19	p-n-p	8,000†	-32	1,500	-7	300	—	—	—	45**	20 (V _c =-14)	200	} Pins, base and emitter. Mounting plate collector
OC22	p-n-p	6,000†	-32	1,000	-2	100	—	—	—	200**	20 (V _c =-10)	2,000	
OC23	p-n-p	6,000†	-40	1,000	-2	100	—	—	—	200**	20 (V _c =-10)	2,500	
OC24	p-n-p	6,000†	-40	1,000	-2	100	—	—	—	200**	20 (V _c =-10)	2,500	
OC26	p-n-p	12,500†	-32	3,500	-14	30	—	—	—	>20	<20	—	
OC28	p-n-p	30,000†	-80	6,000	-14	30	—	—	—	>20	<20	250	
OC29	p-n-p	30,000†	-60	6,000	-1	1,000	—	—	—	>45	<20	250	
OC35	p-n-p	30,000†	-60	6,000	-1	1,000	—	—	—	>25	<20 (V _c =-14)	250	
OC36	p-n-p	30,000†	-80	6,000	-1	1,000	—	—	—	>30	<20 (V _c =-14)	250	
OC41	p-n-p	43†	-15	50	—	—	—	—	—	40**	10 (V _c =-15)	4,000§	
OC42	p-n-p	43†	-15	50	—	—	—	—	—	80**	10 (V _c =-15)	7,000§	
OC44	p-n-p	20	-10 (R _b <1kΩ)	5	6	1	—	—	—	100	0.5 (V _c =-2)	15,000	
OC45	p-n-p	20	-10 (R _b <1kΩ)	5	6	1	—	—	—	50	0.5 (V _c =-2)	6,000	} Collector coded red then clockwise, emitter, base
OC57	p-n-p	10	-7.0	5	-0.5	0.25	—	—	—	35	1.5 (V _c =-2)	10	
OC58	p-n-p	10	-7.0	5	-0.5	0.25	—	—	—	55	1.5 (V _c =-2)	10	
OC59	p-n-p	10	-7.0	5	-0.5	0.25	—	—	—	80	1.5 (V _c =-2)	10	
OC60	p-n-p	10	-7.0	5	-0.5	0.25	—	—	—	—	1.5 (V _c =-2)	—	
OC65	p-n-p	25	-5	10	2	0.5	40	1,000	1,400	20 to 40	5 (V _c =-4.5)	—	
OC66	p-n-p	25	-15 (R _b <500Ω)	10	2	3	7	500	625	30 to 80	8 (V _c =-4.5)	—	
OC70	p-n-p	50	-20 (R _b <500Ω)	10	2	0.5	40	1,000	1,400	20 to 40	8 (V _c =-4.5)	—	
OC71	p-n-p	50	-20 (R _b <500Ω)	10	2	3	7	500	625	30 to 75	8 (V _c =-4.5)	—	
OC72	} p-n-p	100‡	-32 (R _b <1kΩ)	125	5.4	10	—	—	—	70	4.5 (V _c =-10)	350	} Base, centre lead. Collector coded red
2-OC72		50	-30	10	10	0.5	—	—	—	30 to 65	3.5 (V _c =-4.5)	—	
OC73	p-n-p	75†	-30	10	-2.0	-3	—	—	—	90	4.5 (V _c =-4.5)	900	
OC75	p-n-p	75	-32 (V _{be} =+1V)	125	5.4	10	—	—	—	>15**	4.5 (V _c =-10)	—	
OC76	p-n-p	75	-60	125	5.4	10	—	—	—	45	4.5 (V _c =-10)	—	
OC77	p-n-p	160†	-32	500	-6	1	25	60	—	90	45 (V _c =-10)	850	
OC83	p-n-p	160†	-32	500	-6	1	25	60	—	90	45 (V _c =-10)	1,000	
OC84	p-n-p	210†	-32	500	-2	100	0.25	80	—	140	40 (V _c =-24)	1,300§	} Collector stands apart. No connection, base & emitter
OC122	p-n-p	210†	-50	500	-2	100	0.25	80	—	160	30 (V _c =-10)	1,500§	
OC123	p-n-p	60†	+20	200	+5	0	—	—	—	>20	>3.0 (V _c =0)	3,500	} Base centre lead Collector coded red
OC139	n-p-n	60†	+20	200	+5	0	—	—	—	>50	>3.0 (V _c =0)	4,500	
OC140	n-p-n	50†	-20	10	-6	0	—	—	—	100	1.5	70,000§	} Collector lead stands apart, shield base emitter
OC170	p-n-p	50†	-20	10	-6	0	—	—	—	100	1.5	70,000§	
OC171	p-n-p	50†	-20	10	-6	0	—	—	—	100	1.5	70,000§	

(Continued)

Type	p-n-p or n-p-n	P _c max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters							Connections	
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _c ' (kΩ)	α'	I _{cb} (μA)		f _{ca} (kc/s)
MULLARD (Continued)													
<i>Current Types (Continued)</i>													
OC200	p-n-p	210†	-25	50	-6	1	25	125	—	20	0.001 (V _c = -10)	1,000	} Base centre lead Collector coded red
OC201	p-n-p	210†	-25	50	-6	1	25	125	—	30	0.001 (V _c = -10)	4,000	
OC202	p-n-p	210†	-15	50	-6	1	25	300	—	70	0.001 (V _c = -10)	4,000	
OC203	p-n-p	210†	-60	50	-6	1	25	125	—	15	0.001 (V _c = -10)	1,000	
OC204	p-n-p	300	-32	125	-6	1	25	100	—	40	0.001 (V _c = -10)	1,500	
OC205	p-n-p	210†	-60	250	-6	1	25	100	—	40	0.001 (V _c = -10)	1,500	
OC206	p-n-p	210†	-32	250	-6	1	25	100	—	40	0.001 (V _c = -10)	2,000	

† At T_{ambient} = 45°C.

†† The maximum collector voltage in earthed emitter circuits depends upon external base to emitter resistance, and values quoted are applicable if R_b > values given in brackets.

* On heat sink of thermal conductivity θh = 3.5°C/W.

** Large signal current amplification (α').

†† With cooling fin mounted on heat sink 3.5×3.5cm or equivalent with a thermal conductivity = 0.3°C/mW.

§f₁, frequency at which modulus of h_{fe} is equal to unity.

h_{fe} is small-signal fwd. 1 transfer ratio with o.p. short-circuited to a.c.

NEWMARKET—PYE

Current Types

V6/2R	p-n-p	75	6	30**	4.5	1.0	} High frequency types	30	1.0	3,000	} Base lead central. Collector stands apart
V6/4R	p-n-p	75	6	30**	4.5	1.0		50	1.0	5,500	
V6/8R	p-n-p	75	6	30**	4.5	1.0		80	1.0	10,000	
V6/2RJ	p-n-p	75	6	30**	4.5	1	} High frequency types	30	1	3,000	} Base lead central. Collector stands apart
V6/4RJ	p-n-p	75	6	30**	4.5	1		50	1	5,500	
V6/8RJ	p-n-p	75	6	30**	4.5	1		80	1	10,000	
V10/15A	p-n-p	125	10	30**	4.5	1.0	} Audio frequency types	20	5	600	
V10/30A	p-n-p	125	10	30**	4.5	1.0		40	5	700	
V10/50A	p-n-p	125	10	30**	4.5	1.0		75	5	1,200	
V10/1S	p-n-p	75	10	500	4.5	1.0	} Switching transistors	66	1.0	10,000	
V10/2S	p-n-p	75	10	400	4.5	1.0		66	1.0	5,000	
V10/1SJ	p-n-p	75	10	500	4.5	1		} Switching types	66	1	10,000
V10/2SJ	p-n-p	75	10	400	4.5	1	66		1	5,000	
V15/20IP	p-n-p	2,000***	15	2,000**	1.5	20	Intermediate power type 40	20	—	300	} Collector coded white, clockwise emitter, base
V15/10P	p-n-p	10,000††	15	3,000**	1.5	200	} Power types	18	20	—	} Collector 0BA stud. Emitter left screw at top
V15/20P	p-n-p	10,000††	15	3,000**	1.5	200		24	20	—	
V15/30P	p-n-p	10,000††	15	3,000**	1.5	20		38	20	—	
V15/20R	p-n-p	75	15	12**	6	1.0	VHF drift transistor	50	8	40,000	} Base lead central. Collector stands apart
V30/20IP	p-n-p	2,000***	30	2,000**	1.5	20	Intermediate power type 40	20	—	300	} Collector coded white, clockwise emitter, base
V30/10P	p-n-p	10,000††	30	3,000**	1.5	200	} Power types	18	20	—	} Collector 0BA stud. Emitter left
V30/20P	p-n-p	10,000††	30	3,000**	1.5	200		24	20	—	
V30/30P	p-n-p	10,000††	30	3,000**	1.5	200		38	20	—	
V15/10DP	p-n-p	10,000††	15	3,000**	1.5	200		18	20	—	
V15/20DP	p-n-p	10,000††	15	3,000**	1.5	200		24	20	—	
V15/30DP	p-n-p	10,000††	15	3,000**	1.5	200		38	20	—	
V30/10DP	p-n-p	10,000††	30	3,000**	1.5	200		18	20	—	
V30/20DP	p-n-p	10,000††	30	3,000**	1.5	200		24	20	—	
V30/30DP	p-n-p	10,000††	30	3,000**	1.5	200		38	20	—	
V60/20IP	p-n-p	2,000***	60	2,000**	1.5	20	Intermediate power type 40	20	—	300	} Collector coded white, clockwise emitter, base

(Continued)

Junction Transistors

Type	p-n-p or n-p-n	P _e max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters							Connections
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _e ' (kΩ)	a'	I _{co} (μA)	

NEWMARKET—PYE (Continued)

Current Types (Continued)

V60/10P	p-n-p	10,000††	60	3,000**	1.5	200	} Power types	}	18	20	—	} Collector 0BA stud. Emitter left
V60/20P	p-n-p	10,000††	60	3,000**	1.5	200			24	20	—	
V60/30P	p-n-p	10,000††	60	3,000**	1.5	200			38	20	—	

† On heat sink 7 × 7 in. 16 s.w.g. aluminium.

†† On heat sink 50 sq. in. 16 s.w.g. aluminium.

*** Limited only by max. dissipation and reduction in current gain.

NOTE: —V—/—J Jedec Type T05 outline replacement for V6—/—R and V10—/—S types.

V—/—DP Jedec Type T03 outline replacement for V—/—P types.

R.C.A.

Current Types

2N104	p-n-p	150	-30	-50	-3	-0.2	—	—	—	44	-10 (V _c =-12)	530	} Emitter, base, wide space, collector.
2N105	p-n-p	60	-25	-15	-1.3	-0.3	—	—	—	45	-7 (V _c =-12)	750	
2N109	p-n-p	150	-25	-70	—	—	—	—	—	—	-14 (V _c =-25)	—	} Emitter, base, wide space collector.
2N139	p-n-p	80	-16	-15	-9	-0.5	455kc/s amplifier		45	-6 (V _c =-12)	6,800	} Emitter, base, wide space collector.	
2N140	p-n-p	80	-16	-15	-9	-0.6	535-1,640kc/s converter		75	-6 (V _c =-25)	10,000		
2N175	p-n-p	50	-10	-2	-4	-0.5	—	—	—	65	-12 (V _c =-25)	850	
2N176	p-n-p	10,000	-40	-3,000	—	—	—	—	—	—	-3,000 (V _c =-30)	—	} Emitter "E", base "B", collector is mounting flange
2N215	p-n-p	150	-30	-50	-6	-1	—	—	—	44	-10 (V _c =-12)	530	
2N217	p-n-p	150	-25	-70	—	—	—	—	—	—	-14 (V _c =-25)	—	} Clockwise: emitter, base, collector, gap.
2N218	p-n-p	80	-16	-15	-9	-0.5	455kc/s amplifier		45	-6 (V _c =-12)	6,800		
2N219	p-n-p	80	-16	-15	-9	-0.6	535-1,640kc/s converter		75	-6 (V _c =-12)	10,000		
2N220	p-n-p	50	-10	-2	-4	-0.5	—	—	—	65	-12 (V _c =-25)	850	
2N247	p-n-p	80	-35	-10	-9	-1	Drift type		60	-16 (V _c =-30)	30,000	} Emitter, base, shield, wide space collector.	
2N269	p-n-p	120	-25	-100	—	—	Medium-speed switching		—	-5 (V _c =-12)	—		} Clockwise: emitter, base, collector, gap.
2N270	p-n-p	250	-25	-150	—	—	—	—	—	—	-16 (V _c =-25)	—	
2N274	p-n-p	120	-40	-10	-12	-1.5	Drift type		60	-12 (V _c =-12)	30,000	} Clockwise: emitter, base, collector, gap. Shield, centre.	
2N301	p-n-p	11,000‡	-40	-3,000	—	—	—	—	—	—	-100 (V _c =-0.5)		—
2N301-A	p-n-p	11,000‡	-60	-3,000	—	—	—	—	—	—	-100 (V _c =-0.5)	—	
2N331	p-n-p	200	-30	-200	-3	-0.5	—	—	—	42	-16 (V _c =-30)	1,160	} Clockwise, emitter, base, collector, gap.
2N351	p-n-p	10,000‡	-40	-3,000	—	—	—	—	—	—	-3,000 (V _c =-30)	—	

(Continued)

Type	p-n-p or n-p-n	P_o max. (mW)	V_c max. (V)	I_c max. (mA)	Small Signal Parameters								Connections
					V_c (V)	I_c (mA)	$r_{c'}$ (Ω)	$r_{b'}$ (Ω)	$r_{e'}$ (k Ω)	α'	I_{co} (μ A)	f_{ca} (kc/s)	
R.C.A. (Continued)													
<i>Current Types (Continued)</i>													
2N370	p-n-p	80	-24	-10	—	—	Drift type	60	-10 ($V_c = -12$)	—	} Emitter, base, shield, wide space, collector		
2N371	p-n-p	80	-24	-10	—	—	Drift type	—	-10 ($V_c = -12$)	30,000			
2N372	p-n-p	80	-24	-10	—	—	Drift type	60	-10 ($V_c = -12$)	—			
2N373	p-n-p	80	-24	-10	—	—	Drift type	60	-8 ($V_c = -12$)	30,000			
2N374	p-n-p	80	-25	-10	—	—	535-1,640kc/s converter	60	-8 ($V_c = -12$)	30,000			
2N376	p-n-p	10,000	-40	-3,000	—	—	—	—	-3,000 ($V_c = -30$)	—	} Emitter "E" base "B", collector is mounting flange		
2N384	p-n-p	120	-40	-10	-12	-1.5	V.h.f. amplifier	60	-12 ($V_c = -12$)	100,000	} Clockwise, emitter, base, collector, gap, Shield, centre.		
2N398	p-n-p	50	-105	-100	—	—	Low-speed switching	—	-14 ($V_c = -2.5$)	—	} Clockwise, emitter, base, collector, gap		
2N404	p-n-p	120	-25	-100	—	—	Medium-speed switching	—	-5 ($V_c = -12$)	12,000	} Clockwise, emitter, base, collector, shield, Index tab between shield and emitter		
2N405	p-n-p	150	-20	-35	-6	-1	A.f. driver	35	-14 ($V_c = -12$)	—	} Emitter, base, wide space, collector		
2N406	p-n-p	150	-20	-35	-6	-1	A.f. driver	35	-14 ($V_c = -12$)	—	} Clockwise, emitter, base, collector		
2N407	p-n-p	150	-20	-70	—	—	—	—	-14 ($V_c = -12$)	—	} Emitter, base, wide space, collector		
2N408	p-n-p	150	-20	-70	—	—	—	—	-14 ($V_c = -12$)	—	} Clockwise, emitter, base, collector		
2N409	p-n-p	80	-13	-15	-9	-0.5	455kc/s amplifier	45	-10 ($V_c = -12$)	6,800	} Emitter, base, wide space, collector		
2N410	p-n-p	80	-13	-15	-9	-0.5	455kc/s amplifier	45	-10 ($V_c = -12$)	6,800	} Clockwise, emitter, base, collector		
2N411	p-n-p	80	-13	-15	-9	-0.6	535-1,640kc/s converter	75	-10 ($V_c = -12$)	10,000	} Emitter, base, wide space, collector		
2N412	p-n-p	80	-13	-15	-9	-0.6	535-1,640kc/s converter	75	-10 ($V_c = -12$)	10,000	} Clockwise, emitter, base, collector		
2N544	p-n-p	80	-24	-10	—	—	Drift type	60	-16 ($V_c = -12$)	30,000	} Emitter, base, shield, wide space, collector		
2N578	p-n-p	120	-20	-400	—	—	Medium-speed switching	—	-5 ($V_c = -12$)	5,000	} Clockwise, emitter, base, collector, gap		
2N579	p-n-p	120	-20	-400	—	—	Medium-speed switching	—	-5 ($V_c = -12$)	8,000			
2N580	p-n-p	120	-20	-400	—	—	High-speed switching	—	-5 ($V_c = -12$)	15,000			

(Continued)

Junction Transistors

Type	p-n-p or n-p-n	P _c max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters							Connections
					V _β (V)	I _β (mA)	r _e ' (Ω)	r _b ' (Ω)	r _e ' (kΩ)	β'	I _{co} (μA)	
R.C.A. (Continued)												
Current Types (Continued)												
2N581	p-n-p	120	-18	-100	—	—	Medium-speed switching		—	-6 (V _c = -6)	8,000	Clockwise, collector, shield, emitter, base. Index tab between shield and emitter
2N582	p-n-p	120	-25	-100	—	—	High-speed switching		—	-5 (V _c = -12)	18,000	
2N583	p-n-p	120	-18	-100	—	—	Medium-speed switching		—	-6 (V _c = -6)	8,000	Clockwise, emitter, base, collector, gap
2N584	p-n-p	120	-25	-100	—	—	High-speed switching		—	-5 (V _c = -12)	18,000	
2N585	n-p-n	120	25	200	—	—	Medium-speed switching		—	8 (V _c = 12)	5,000	
2N586	p-n-p	250	-45	-250	—	—	Low-speed switching		—	-16 (V _c = -45)	—	Emitter, base, shield, wide space, collector Clockwise, emitter, base, collector, gap
2N591	p-n-p	50††	-32	-40	—	—	A.f. driver		—	-7 (V _c = -1)	—	
2N640	p-n-p	80	-34	-10	—	—	Drift type		60	-5 (V _c = -12)	42,000	Emitter, base, shield, wide space, collector
2N641	p-n-p	80	-34	-10	—	—	Drift type		60	-7 (V _c = -12)	42,000	
2N642	p-n-p	80	-34	-10	—	—	535-1,640 kc/s converter		60	-7 (V _c = -12)	42,000	
2N643	p-n-p	120	-30	-100	—	—	High-speed switching		—	-10 (V _c = -7)	45,000	Clockwise, collector, shield, emitter, base. Tab between shield and em.
2N644												
2N645												
2N647	n-p-n	100	25	100	—	—	For Class B complimentary symmetry with 2N217		70	14 (V _c = 25)	—	Clockwise, emitter, base, collector, gap
2N649	n-p-n	100	20	100	—	—	For Class B complimentary symmetry with 2N408		65	14 (V _c = 25)	—	
2N1010	n-p-n	—	10	2	—	—	Low noise		35	10 (V _c = 10)	2,000	
2N1023	p-n-p	120	-40	-10	—	—	Drift type		60	—	120,000	Clockwise, emitter, base, collector, gap Shield centre Clockwise, collector, shield, emitter, base. Tab between shield and em.
2N1066	p-n-p	120	-40	-10	—	—	Drift type		60	-12 (V _c = -12)	120,000	
2N1090	n-p-n	120	25	400	—	—	Medium-speed switching		—	8 (V _c = 12)	7,000	Clockwise, emitter, base, collector
2N1091	n-p-n	120	25	400	—	—	Medium-speed switching		—	8 (V _c = 12)	13,000	
2N1177	p-n-p	80	-30	-10	—	—	F.m. amplifier		100	-12 (V _c = -12)	140,000	Clockwise, emitter, base, collector
2N1178	p-n-p	80	-30	-10	—	—	F.m. oscillator		40	-12 (V _c = -12)	140,000	
2N1179	p-n-p	80	-30	-10	—	—	F.m. mixer		80	-12 (V _c = -12)	140,000	
2N1180	p-n-p	80	-30	-10	—	—	F.m. i.f. amplifier		80	-12 (V _c = -12)	100,000	
2N1183	p-n-p	1,000	-45	-3,000	—	—	Power switching		—	-30 (V _c = -1.5)	500	Clockwise, emitter, base, collector
2N1183-A	p-n-p	1,000	-60									
2N1183-B	p-n-p	1,000	-80									
2N1184	p-n-p	1,000	-45	-3,000	—	—	Power switching		—	-30 (V _c = -1.5)	500	Clockwise, emitter, base, collector
2N1184-A	p-n-p	1,000	-60									
2N1184-B	p-n-p	1,000	-80									

(Continued)

Type	p-n-p or n-p-n	P _e max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters								Connections	
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _c ' (kΩ)	α'	I _{co} (μA)	f _{co} (kc/s)		
R.C.A. (Continued)														
<i>Current Types (Continued)</i>														
2N1224	p-n-p	120	-40	-10	—	—	—	—	—	V.h.f. amplifier	60	-12‡	30,000	} Clockwise, shield collector, emitter, base. Index tab between shield and emitter
2N1225	p-n-p	120	-40	-10	—	—	—	—	—	Drift type	60	-12‡	100,000	
2N1226	p-n-p	120	-60	-10	—	—	—	—	—	Drift type	60	-12‡	30,000	
2N1300	p-n-p	150	-13	-100	—	—	—	—	—	High-speed switching	—	-3*	40,000	
2N1301	p-n-p	150	-13	-400	—	—	—	—	—	High-speed switching	—	-3*	60,000	
2N1395	p-n-p	120	-40	-10	—	—	—	—	—	Drift type	90	-12‡	30,000	
2N1396	p-n-p	120	-40	-10	—	—	—	—	—	Drift type	90	-12‡	100,000	
2N1397	p-n-p	120	-40	-10	—	—	—	—	—	Drift type	90	-12‡	120,000	
2N1425	p-n-p	80	-24	-10	—	—	—	—	—	455kc/s amplifier	—	-16‡	30,000	
2N1426	p-n-p	80	-24	-10	—	—	—	—	—	535-1,640kc/s	100	-16‡	—	
§ At 80°C. †† At 55°C. ‡ At V _c = -12V. * At V _c = 0V.														

SEMICONDUCTORS

<i>Current Types</i>														
2N207	p-n-p	50	12	20	—	—	—	—	—	Amplifier, subminiature	35 _{min}	15	2,000	As 2N535B
2N499	p-n-p	30§	30	50	—	—	—	—	—	Amplifier, oscillator*	—	5 _{max}	120,000† _{min}	} Clockwise from gap: emitter, base, collector
2N501	p-n-p	25§	15	50	—	—	—	—	—	High-speed switching*	20 _{min} (d.c.)	5 _{max}	90,000† _{min}	
2N501A	p-n-p	60	15	50	—	—	—	—	—	High-speed switching*	20 _{min} (d.c.)	5 _{max}	180,000† _{min}	
2N502	p-n-p	25§	20	50	—	—	—	—	—	Amplifier, 10dB at 200 Mc/s*	9 _{min}	5 _{max}	220,000†	} Clockwise: line or dot C, B, E.
2N502A	p-n-p	25	30	—	—	—	—	—	—	V.h.f. amplifier*	9 _{min}	5 _{max}	220,000†	
2N503	p-n-p	25§	20	50	—	—	—	—	—	Amplifier, 12.5dB at 100 Mc/s*	9 _{min}	5 _{max}	170,000†	} Clockwise from gap: emitter, base, collector.
2N535B	p-n-p	50	20	20	—	—	—	—	—	Low noise, subminiature	35 _{min}	10	2,000	
2N536	p-n-p	50	20	30	—	—	—	—	—	Low-level switch, subminiature	100 _{min} (d.c.)	10	2,000	} Clockwise from gap: emitter, base, collector.
2N597	p-n-p	250	45	400	—	—	—	—	—	General purpose, medium-speed switching	40 _{min}	25	3,000 _{min}	
2N598	p-n-p	250	35	400	—	—	—	—	—	General purpose, medium-speed switching	70 _{min}	25	5,600† _{min}	} C'wise from gap: E, B, C & case
2N599	p-n-p	250	30	400	—	—	—	—	—	General purpose, medium-speed switching	75 _{min}	25	10,000† _{min}	
2N600	p-n-p	750	35	400	—	—	—	—	—	Core driving, medium-speed switching	50 _{min}	25	5,600† _{min}	} Clockwise from gap: E & case, B, C
2N601	p-n-p	750	30	400	—	—	—	—	—	Core driving, medium-speed switching	40 _{min}	5	10,000† _{min}	
2N671	p-n-p	1,000	40	2,000	—	—	—	—	—	Pulse amplification	40 _{min}	75	500 _{min}	} As 2N600
2N675	p-n-p	1,000	40	2,000	—	—	—	—	—	Pulse amplification	40 _{min}	100	400 _{min}	
2N1123	p-n-p	750	45	400	—	—	—	—	—	Medium-speed switching	40 _{min}	5	3,000	} Clockwise from gap: emitter, base, collector
2N1158	p-n-p	60	20	10	—	—	—	—	—	Oscillator, 25mW at 200 Mc/s*	5 _{min}	25	—	
2N1499A	p-n-p	60	20	50	—	—	—	—	—	High-speed switching*	20 _{min} (d.c.)	3	—	} Clockwise from gap: emitter, base, collector
2N1500	p-n-p	50	15	50	—	—	—	—	—	High-speed switching*	20 _{min} (d.c.)	5	120,000†	
2N1727	p-n-p	60	20	50	—	—	—	—	—	Amplifier*	20 _{min}	10 _{max}	50,000† _{min}	} Clockwise from gap: emitter, base, collector
2N1728	p-n-p	60	20	50	—	—	—	—	—	Amplifier, 40dB at 455 kc/s*	25 _{min}	10 _{max}	50,000† _{min}	
2N1742	p-n-p	60	15	—	—	—	—	—	—	Amplifier, 16dB at 200 Mc/s*	10 _{min}	10 _{max}	1,300,000‡	
2N1743	p-n-p	60	15	—	—	—	—	—	—	V.h.f. mixer*	—	10 _{max}	—	
2N1744	p-n-p	60	15	—	—	—	—	—	—	V.h.f. oscillator*	—	10 _{max}	—	
2N1745	p-n-p	60	20	—	—	—	—	—	—	I.f. amplifier, 45 Mc/s*	—	10 _{max}	—	
2N1747	p-n-p	30	25	—	—	—	—	—	—	Amplifier, 28dB at 10.7 Mc/s*	10 _{min}	10 _{max}	—	
2N1748	p-n-p	30	25	50	—	—	—	—	—	Video*	50 _{min}	10 _{max}	50,000† _{min}	
2N1749	p-n-p	35	30	10	—	—	—	—	—	Video output*	30 _{min}	10 _{max}	50,000† _{min}	
2N1750	p-n-p	30	12	50	—	—	—	—	—	Sync. separator*	50 _{min}	10 _{max}	50,000† _{min}	
MA393	p-n-p	25	6	50	—	—	—	—	—	Micro-alloy types, switching	40 _{min}	10 _{max}	25,000† _{min}	} Clockwise from gap: emitter, base, collector
MAS20	p-n-p	25	6	20	—	—	—	—	—	Micro-alloy types, switching	80 _{min} (d.c.)	20 _{max}	15,000† _{min}	
SA495	p-n-p	150	25	50	—	—	—	—	—	amplifier	9 _{min}	0.1 _{max}	8,000† _{min}	
SA496	p-n-p	150	10	50	—	—	—	—	—	switching	6 _{min}	0.1 _{max}	7,000† _{min}	
SA445	p-n-p	150	5	50	—	—	—	—	—	amplifier	18	0.05 _{max}	4,000† _{min}	
SAC40	p-n-p	150	5	50	—	—	—	—	—	choppers	—	0.05 _{max}	10,000† _{min}	
SAC42	p-n-p	150	15	50	—	—	—	—	—	choppers	—	0.05 _{max}	10,000† _{min}	
SAC44	p-n-p	150	5	50	—	—	—	—	—	choppers	—	0.05 _{max}	4,000† _{min}	
SB128	p-n-p	25	10	5	—	—	—	—	—	Surface barrier	19 _{min}	15 _{max}	27,000† _{min}	
SB240	p-n-p	30	6	15	—	—	—	—	—	switching	16 _{min}	3 _{max}	25,000† _{min}	
SB344	p-n-p	20**	5	5	—	—	—	—	—	switching	11 _{min}	3 _{max}	30,000† _{min}	
SB345	p-n-p	20**	5	5	—	—	—	—	—	General purpose	25 _{min}	3 _{max}	30,000† _{min}	

* Micro-alloy, diffused-base types. ‡ At 45°C. ** At 40°C. †† = modulus h_{fe} × measuring frequency. h_{fe} is small-signal fwd. I transfer ratio with o.p. short-circuited to a.c. ‡ f_{max} = maximum frequency for oscillation.

S.T.C.

<i>Replacement Types</i>													
TJ1	p-n-p	200	>20*	50	1.5	2	15	350	30	20	10 _{max} †	500	} Emitter: red Base: green Collector: black
TJ2	p-n-p	200	>20*	50	1.5	2	15	650	25	40	10 _{max} †	600	
TJ3	p-n-p	200	>20*	50	1.5	2	15	850	17.5	60	10 _{max} †	800	

(Continued)

Junction Transistors

Type	p-n-p or n-p-n	P _c max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters							Connections	
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _e ' (kΩ)	α'	I _{co} (μA)		f _{os} (kc/s)
S.T.C. (Continued)													
<i>Replacement Types (Continued)</i>													
TS1	p-n-p	50	>20*	50	1.5	2	15	350	30	20	10 _{max} †	500	Collector : white. Coil-Base-Em. clockwise Coll. white. Base, emitter clockwise.
TS2	p-n-p	50	>20*	50	1.5	2	15	650	25	40	10 _{max} †	600	
TS3	p-n-p	50	>20*	50	1.5	2	15	850	17.5	60	10 _{max} †	800	
TS13	p-n-p	70	20	**	9	1	13	1,200	60	55	7 _{max}	800	
TS14	p-n-p	70	20	**	9	1	13	950	80	35	7 _{max}	700	
TS15	p-n-p	70	45	**	9	1	13	1,050	70	40	7 _{max}	750	
<i>Current Types</i>													
TK23	p-n-p	200	20	**	12.0	1	—	—	—	50	2	1,000	E, B, C clock- wise. Swaged collector
TK28	p-n-p	200	20	**	0.1	3	—	—	—	46	—	—	
TK30	p-n-p	200	10	**	4.5	1	—	—	—	40	0.7	6,000	
TK31	p-n-p	200	5	**	4.5	1	—	—	—	60	0.7	11,000	
TK40	p-n-p	200	20	**	12.0	1	—	—	—	90	1.3	1,800	
TK41	p-n-p	200	20	**	12.0	1	—	—	—	40	1.2	1,100	
TK42	p-n-p	200	15	**	12.0	1	—	—	—	66	1.2	1,200	

* These figures are not max. ratings, but refer to min. collector turnover voltage at I_b=0. † V = -10V.
 ** Limited only by collector dissipation and the fall in current gain at high currents.

TEXAS

<i>Current Types</i>													
2G101	p-n-p	60	15	10	6	2	15dB power gain at 100 Mc/s			20	1	450,000	Reading clock- wise from tab ; emitter, base, collector, collector to case.
2G102	p-n-p	60	15	10	6	2	Low-noise version of 2G101			20	1	450,000	
2G103	p-n-p	150	15	50	5	10	} Rise-time is 4mμs			} 50	0.3	300,000	
2G104	p-n-p	150	15	50	5	10					} Power output at 100 Mc/s=150mW	} 50	
2G110	p-n-p	250	36	50	6	10	} Saturation resistance <0.05Ω	} 20	1	500,000			
2G220	p-n-p	80,000**	40	10,000	6	1,000			} Saturation resistance <0.05Ω	} 40	200	200	
2G221	p-n-p	80,000**	60	10,000	6	1,000	} Saturation resistance <0.05Ω	} 40			200	200	
2G222	p-n-p	80,000**	80	10,000	6	1,000			} Saturation resistance <0.05Ω	} 40	200	200	
2G223	p-n-p	80,000**	40	15,000	6	1,000	} Saturation resistance <0.05Ω	} 45			200	250	
2G224	p-n-p	80,000**	60	15,000	6	1,000			} Saturation resistance <0.05Ω	} 45	200	250	
2G225	p-n-p	80,000**	80	15,000	6	1,000	} Saturation resistance <0.05Ω	} 45			200	250	
2G226	p-n-p	80,000**	40	20,000	6	1,000			} Saturation resistance <0.05Ω	} 55	200	300	
2G227	p-n-p	80,000**	60	20,000	6	1,000	} Saturation resistance <0.05Ω	} 55			200	300	
2G228	p-n-p	80,000**	80	20,000	6	1,000			} Saturation resistance <0.05Ω	} 55	200	300	
2G229	p-n-p	80,000**	40	25,000	6	1,000	} Saturation resistance <0.05Ω	} 60			200	350	
2G230	p-n-p	80,000**	60	25,000	6	1,000			} Saturation resistance <0.05Ω	} 60	200	350	
2G231	p-n-p	80,000**	80	25,000	6	1,000	} Saturation resistance <0.05Ω	} 60			200	350	
2G240	p-n-p	15,000**	3,000	20	500	500			} Rise time <1μs	} 90	200	15,000	
2G301	p-n-p	75	15	50	6	1	} Rise time <1μs	} 26			90	50	60
2G302	p-n-p	75	15	50	6	1			} Rise time <1μs	} 26	90	50	130
2G303	p-n-p	75	15	100	6	1	} Rise time <1μs	} 26			90	50	60
2G304	p-n-p	75	15	100	6	1			} Rise time <1μs	} 26	90	50	130
2N456	p-n-p	50,000**	40	5,000	6	1,000	—	—			—	150	200
2N457	p-n-p	50,000**	60	5,000	6	1,000	—	—	—	150	200	200	
2N458	p-n-p	50,000**	80	5,000	6	1,000	—	—	—	150	200	200	
2N696	n-p-n	600	50	—	10	50	} Rise-time <0.15μs Dissipate 2W on heat sink Operate up to 125°C	} Rise-time <4mμs	70	1.0	70,000	Reading clock- wise from tab ; emitter, base, collector.	
2N697	n-p-n	600	50	—	10	50			} Rise-time <4mμs	140	1.0		100,000
2N706A	n-p-n	300	20	—	10	10	} Power output at 70 Mc/s=400mW	} Rise-time <4mμs		60	<0.5		300,000
2N711	p-n-p	150	12	50	5	10			} Power output at 70 Mc/s=600mW	} Rise-time <4mμs	50		0.3
2N715	n-p-n	500	50	—	10	15	} Power output at 70 Mc/s=600mW	} Rise-time <4mμs			50		<1.0
2N716	n-p-n	500	70	—	10	15			} Rise-time <4mμs	} Rise-time <4mμs	50		<1.0
2N753	n-p-n	300	20	—	10	10	} For ambient temperatures up to 175°C	} Rise-time 0.05μs			100		<0.5
2S001	n-p-n	150	45	25	5	1			} For ambient temperatures up to 175°C	} Rise-time 0.05μs	14		0.03
2S002	n-p-n	150	45	25	5	1	} For ambient temperatures up to 175°C	} Rise-time 0.05μs			25		0.03
(CV7056)	n-p-n	150	45	25	5	1			} For ambient temperatures up to 175°C	} Rise-time 0.05μs	25		0.03
2S003	n-p-n	150	45	25	5	1	} For ambient temperatures up to 175°C	} Rise-time 0.05μs			50	0.03	>4,000
(CV7057)	n-p-n	150	45	25	5	1			} For ambient temperatures up to 175°C	} Rise-time 0.05μs	50	0.03	>4,000
2S004	n-p-n	150	45	25	5	1	} For ambient temperatures up to 175°C	} Rise-time 0.05μs			50	0.03	>4,000
(CV7058)	n-p-n	150	45	25	5	1			} For ambient temperatures up to 175°C	} Rise-time 0.05μs	50	0.03	>4,000
2S005	n-p-n	125	40	20	20	1	} For ambient temperatures up to 175°C	} Rise-time 0.05μs			100	0.03	30,000
(CV7059)	n-p-n	125	40	20	20	1			} For ambient temperatures up to 175°C	} Rise-time 0.05μs	100	0.03	30,000

(Continued)

Type	p-n-p or n-p-n	P _c max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters								Connections
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _c ' (kΩ)	α'	I _{EP} (μA)	f _{ca} (kc/s)	
TEXAS (Continued)													
<i>Current Types (Continued)</i>													
2S012A (CV7061)	n-p-n	60,000**	70	>2,000	15	1,500	For ambient temperatures up to 150°C			40	10	5,000	Base, centre lead; collector to case
2S013A (CV7066)	n-p-n	60,000**	60	1,500	15	1,500	Rise-time 0.05 μs			35	10	5,000	
2S014 (CV7060)	n-p-n	125	40	20	20	1	For ambient temperature up to 200°C			65	0.03	20,000	As for 2S001
2S017 (CV7062)	n-p-n	4,000**	60	—	30	30	Rise-time 5m μs			20	0.2	3,000	Reading clockwise from tab; emitter, base, collector (to case).
2S018 (CV7063)	n-p-n	4,000**	100	—	30	30	Industrial versions of 2S003 and 2S004			20	0.2	3,000	
2S019 (CV7064)	n-p-n	4,000**	60	—	30	30	Silicon tetrode transistors for h.f. amplification			70	0.2	3,000	
2S020 (CV7065)	n-p-n	4,000**	100	—	30	30				70	0.2	3,000	As for 2S020
2S101	n-p-n	300	25	50	5	10				40	0.02	200,000	
2S701 2S702	n-p-n n-p-n	100	25	20	5	1				{ 20 35	0.05 0.05	6,000 8,000	Reading clockwise from tab; emitter, base, collector.
3S002 3S004	n-p-n n-p-n	125	60	—	20	1				25 25	0.005 0.005	100,000 150,000	Reading clockwise from tab; emitter, base 1, collector, base 2

** When case is maintained at 25°C.

AMPLIFIER TRIODES

Type	Heater		Volts		Anode Current (mA)	r _a (Ω)	g _m (mA/V)	Capacitances (pF)			Base			
	Volts	Amps	Anode	Grid				C _{gk}	C _{ak}	C _{ga}	Type	Ref.		
BRIMAR														
<i>Obsolete Types</i>														
1H5		1.4*	0.05	90	0	0.15	240,000	0.274	1.1	4.6	1.0	IO	91	
30		2.0*	0.06	135	-9.0	3.0	10,300	0.9	3.0	2.0	6.0	UX4	1	
27		2.5	1.75	250	-21.0	5.2	9,000	1.0	—	—	—	UX5	1	
11A2	(DD)	4.0	1.0	200	-2.0	3.0	18,000	2.8	7.0	7.0	5.0	B7	7	
6Q7	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.0	5.0	1.6	IO	29	
6T8	(TD)	6.3	0.45	250	-3.0	1.0	58,000	1.2	1.6	1.0	2.2	B9A	2	
7B6	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	3.0	2.4	1.6	B8B	2	
7K7	(DD)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.6	3.1	2.7	B8B	21	
37		6.3	0.3	250	-18.0	7.5	8,400	1.1	—	—	—	UX5	1	
75	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	4.2	3.4	1.8	UX5	4	
76		6.3	0.3	250	-13.5	5.0	9,500	1.45	3.4	5.5	2.2	UX5	1	
85	(DD)	6.3	0.3	250	-20.0	8.0	7,500	1.1	—	—	—	UX6	4	
12Q7	(DD)	12.6	0.15	Other data as Type 6Q7										
12SL7	(DT)	12.6	0.15	Other data as Type 6SL7										
14B6	(DD)	12.6	0.15	Other data as Type 7B6										
4D1		13.0	0.2	250	-3.0	10.0	10,000	4.0	—	—	—	B7	23	
11D3	(DD)	13.0	0.2	250	-2.0	0.4	90,000	1.1	2.0	4.0	2.0	B7	7	
11D5	(DD)	13.0	0.15	250	-3.0	3.8	26,700	1.5	—	—	—	B7	7	
19T8	(TD)	19.0	0.15	Other data as Type 6T8										
13D1(25SN7)(SQ)(DT)		25.0	0.15	Other data as Type 6SN7										
<i>Replacement Types</i>														
6AV6	(DD)	6.3	0.3	250	-2.0	1.2	62,500	1.6	2.3	1.1	2.1	B7G	19	
6C5		6.3	0.3	250	-8.0	8.0	10,000	2.0	4.4	12.0	2.2	IO	20	
6N7	(DT)	6.3	0.8	250	-5.0	3.0	23,000	1.6	—	—	—	IO	22	
6R7	(DD)	6.3	0.3	250	-9.0	9.5	8,500	1.9	2.6	5.2	2.4	IO	29	
6SC7		6.3	0.3	250	-2.0	2.0	53,000	1.325	2.0	3.0	2.0	IO	25	
6SL7	(DT)	6.3	0.3	250	-2.0	2.3	44,000	1.6	3.15	0.9	3.5	IO	26	
6SN7														
13D2 (SQ)	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.6	0.8	4.1	IO	26	
7C6	(DD)	6.3	0.15	250	-1.0	1.3	100,000	1.0	2.4	2.4	1.6	B8B	2	
EBC41	(DD)	6.3	0.23	250	-3.0	1.0	54,000	1.3	2.75	1.5	1.3	B8A	9	
UBC41	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.75	1.5	1.3	B8A	9	
<i>Current Types</i>														
5965		6.3	0.45†	150	R _K 220Ω	8.2	7,250	6.5	3.8	{ a ₁ 0.5 a ₂ 0.38 }		3.0	B9A	1

(Continued)

Amplifier Triodes

Type	Heater		Volts		Anode Current (mA)	r_a (Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Grid				c_{gk}	c_{ob}	c_{oa}	Type	Ref.	
BRIMAR (Continued)													
<i>Current Types (Continued)</i>													
6AF4A		6.3	0.225	80	-2.4	16.0	2,270	6.6	2.2	0.45	1.9	B7G	60
6AM4		6.3	0.225	200	-1.0	10.0	8,700	9.8	4.4	0.16	2.4	B9A	38
6AT6	} (DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.3	1.1	2.1	B7G	19
6066 (SQ)													
6BQ7A	(DT)	6.3	0.4	150	-2.0	9.0	6,100	6.4	2.85	0.15	1.15	B9A	39
6BR8	(TP)	6.3	0.45	150	-1.0	18.0	5,000	8.5	2.5	0.4	1.8	B9A	67
6C4	} (DD)	6.3	0.15	250	-8.5	10.5	7,700	2.2	1.8	1.3	1.6	B7G	15
G/6C4 (SQ)													
6J5		6.3	0.3	250	-8.0	9.0	7,700	2.6	4.2	5.0	5.0	10	20
6J6	(DT)	6.3	0.45	100	$R_K=50\Omega$	8.5	7,100	5.3	2.2	0.4	1.6	B7G	17
12AT7	} (DT)	6.3	0.3†	250	-2.0	10.0	10,000	5.5	2.5	0.4	1.5	B9A	1
6060 (SQ)													
12AU7	} (DT)	6.3	0.3†	250	-8.5	10.5	7,700	2.2	1.6	0.5	1.5	B9A	1
6067 (SQ)													
12AX7	} (DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
6057 (SQ)													
12BH7	(DT)	6.3	0.6†	250	-10.5	11.5	5,500	3.1	3.0	0.8	2.4	B9A	1
13D3	} (DT)	6.3	0.6†	250	-4.6	6.0	14,000	2.3	2.3	0.9	2.1	B9A	1
6158 (SQ)													
E88CC	(DT)	6.3	0.3	90	-1.2	15.0	2,650	12.5	3.3	0.18	1.4	B9A	39
EABC80/6AK8	(TD)	6.3	0.45	250	-3.0	1.0	58,000	1.2	1.9	1.6	2.2	B9A	2
ECC84/6CW7	(DT)	6.3	0.335	90	-1.5	12.0	4,000	6.0	2.3	0.5	2.3	B9A	28
ECC85	(DT)	6.3	0.435	250	-2.0	10.0	97,000	6.0	3.0	0.18	1.5	B9A	39
ECC88	(DT)	6.3	0.365	90	-1.3	15.0	2,600	12.5	3.3	0.18	1.4	B9A	39
ECF80	(TP)	6.3	0.3	100	-2.0	14.0	4,000	5.0	2.5	1.8	1.5	B9A	25
ECL80/6AB8	(TP)	6.3	0.3	100	-2.3	4.0	12,500	1.4	2.0	0.3	0.9	B9A	13
ECL82/6BM8	(TP)	6.3	0.78	100	0	3.5	27,000	2.5	2.7	4.0	4.0	B9A	37
PCC84/7AN7	(DT)	7.0	0.3		Other data as Type ECC84								
PCF80	(TP)	9.0	0.3	100	-2.0	14.0	4,000	5.0	2.5	1.8	1.5	B9A	25
12AV6	(DD)	12.6	0.15	250	-2.0	1.2	62,500	1.6	2.3	1.1	2.1	B7G	19
12AE6	(DD)	12.6	0.15	12.6	0	0.75	15,000	1.0	1.8	1.1	2.0	B7G	19
12AT6	(DD)	12.6	0.15		Other data as Type 6AT6								
PCL84	(TP)	15.0	0.3	200	-1.7	3.0	16,200	4.0	4.0	2.5	2.7	B9A	53
PCL82	(TP)	16.0	0.3		Other data as Type ECL82								
PCL85	(TP)	18.0	0.3	100	0	10.0	9,100	5.5	3.0	2.5	2.0	B9A	66
HABC80	(TD)	19.0	0.15		Other data as Type EABC80								

COSSOR

Obsolete Types

1H5		1.4*	0.05	90	0	0.15	240,000	0.275	1.1	4.6	1.0	10	91
210DDT	(DD)	2.0*	0.1	100	0	2.3	25,000	1.1	3.0	10.5	1.6	B5	5
210DET		2.0*	0.1	150	-4.5	3.8	13,000	1.1	—	—	—	B4	1
210HF		2.0*	0.1	150	-3.0	1.6	15,800	1.5	—	—	—	B4	1
210HL		2.0*	0.1	150	-3.0	1.6	22,000	1.1	—	—	—	B4	1
210LF		2.0*	0.1	150	-4.5	4.8	10,000	1.4	—	—	—	B4	1
210RC		2.0*	0.1	150	-1.5	0.85	50,000	0.8	5.0	2.0	6.0	B4	1
41FP		4.0	1.0	250	-18.0	19.0	3,600	2.8	6.6	3.0	4.6	B5	1
41MH		4.0	1.0	200	-1.5	3.2	18,000	4.0	9.5	14.0	2.5	B5	1
41MHL		4.0	1.0	200	-3.0	4.0	11,500	4.5	9.5	14.0	2.5	B5	1
41MTA		4.0	1.0	100	0	4.9	18,000	4.0	—	—	—	B5	1
41MTB		4.0	1.0	100	0	3.6	—	2.6	—	—	—	B5	1
41MTL		4.0	1.0	200	-2.5	5.9	15,000	3.0	8.4	8.9	2.6	B5	1
DDT	(DD)	4.0	1.0	200	-3.0	3.0	17,000	2.4	4.0	6.5	1.0	B7	7
12SC7	(DT)	12.6	0.15	250	-2.0	2.0	53,000	1.3	2.2	3.0	2.0	10	25
12SR7	(DD)	12.6	0.15	250	-9.0	9.5	8,500	1.9	3.6	2.8	2.4	10	31
13DHA	(DD)	13.0	0.2	250	-1.5	1.0	83,000	1.5	—	—	1.0	B7	7
202DDT	(DD)	20.0	0.2	200	-3.0	3.0	17,000	2.4	4.0	6.5	1.0	B7	7

Replacement Types

6C5		6.3	0.3	250	-8.0	8.0	10,000	2.0	4.4	12.0	2.2	10	20
6J5		6.3	0.3	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	10	20
6Q7	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	5.0	3.8	1.4	10	29
6SL7	(DT)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.15	0.9	3.5	10	26
6SN7	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.8	0.8	3.8	10	26
7C6	(DD)	6.3	0.15	250	-1.0	1.3	100,000	1.0	2.4	3.0	1.4	B8B	2
OM4	(DD)	6.3	0.2	250	-5.0	5.5	15,000	2.2	2.5	3.6	1.4	10	29
<i>Current Types</i>													
6BQ7A	(DT)	6.3	0.4	150	-2.0	9.0	6,100	6.4	2.6	0.12	1.2	B9A	39
6C4		6.3	0.15	250	-8.5	10.5	7,700	2.2	1.8	1.3	1.6	B7G	15

Type	p-n-p or n-p-n	P _c max. (mW)	V _c max. (V)	I _c max. (mA)	Small Signal Parameters							Connections
					V _c (V)	I _c (mA)	r _e ' (Ω)	r _b ' (Ω)	r _c ' (kΩ)	α'	I _{eo} (μA)	
TEXAS (Continued)												
<i>Current Types (Continued)</i>												
2S012A (CV7061)	n-p-n	60,000**	70	>2,000	15	1,500	For ambient temperatures up to 150°C	Rise-time 0.05μs	40	10	5,000	Base, centre lead; collector to case
2S013A (CV7066)	n-p-n	60,000**	60	1,500	15	1,500						
2S014 (CV7060)	n-p-n	125	40	20	20	1						
2S017 (CV7062)	n-p-n	4,000**	60	—	30	30	For ambient temperature up to 200°C	20	0.2	3,000	Reading clock- wise from tab; emitter, base, collector (to case).	
2S018 (CV7063)	n-p-n	4,000**	100	—	30	30						
2S019 (CV7064)	n-p-n	4,000**	60	—	30	30						
2S020 (CV7065)	n-p-n	4,000**	100	—	30	30	Rise-time 5mμs	40	0.02	200,000	As for 2S001	
2S101	n-p-n	300	25	50	5	10						
2S701 2S702	n-p-n n-p-n	100	25	20	5	1	Industrial versions of 2S003 and 2S004	20 35	0.05 0.05	6,000 8,000	As for 2S020 Reading clock- wise from tab; emitter, base, collector.	
3S002 3S004	n-p-n n-p-n	125	60	—	20	1						Silicon tetrode transistors for h.f. amplification

** When case is maintained at 25°C.

AMPLIFIER TRIODES

Type	Heater		Volts		Anode Current (mA)	r _a (Ω)	g _m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Grid				c _{gk}	c _{ak}	c _{ya}	Type	Ref.	
BRIMAR													
<i>Obsolete Types</i>													
1H5	1.4*	0.05	90	0	0.15	240,000	0.274	1.1	4.6	1.0	IO	91	
30	2.0*	0.06	135	-9.0	3.0	10,300	0.9	3.0	2.0	6.0	UX4	1	
27	2.5	1.75	250	-21.0	5.2	9,000	1.0	—	—	—	UX5	1	
11A2	(DD)	4.0	1.0	200	-2.0	3.0	18,000	2.8	7.0	7.0	B7	7	
6Q7	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.0	5.0	IO	29	
6T8	(TD)	6.3	0.45	250	-3.0	1.0	58,000	1.2	1.6	1.0	2.2	B9A	2
7B6	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	3.0	2.4	1.6	B8B	2
7K7	(DD)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.6	3.1	2.7	B8B	21
37	(DD)	6.3	0.3	250	-18.0	7.5	8,400	1.1	—	—	—	UX5	1
75	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	4.2	3.4	1.8	UX5	4
76	(DD)	6.3	0.3	250	-13.5	5.0	9,500	1.45	3.4	5.5	2.2	UX5	1
85	(DD)	6.3	0.3	250	-20.0	8.0	7,500	1.1	—	—	—	UX6	4
12Q7	(DD)	12.6	0.15	Other data as Type 6Q7									
12SL7	(DT)	12.6	0.15	Other data as Type 6SL7									
14B6	(DD)	12.6	0.15	Other data as Type 7B6									
4D1	(DD)	13.0	0.2	250	-3.0	10.0	10,000	4.0	—	—	—	B7	23
11D3	(DD)	13.0	0.2	250	-2.0	0.4	90,000	1.1	2.0	4.0	2.0	B7	7
11D5	(DD)	13.0	0.15	250	-3.0	3.8	26,700	1.5	—	—	—	B7	7
19T8	(TD)	19.0	0.15	Other data as Type 6T8									
13D1(25SN7)(SQ)(DT)	(DT)	25.0	0.15	Other data as Type 6SN7									
<i>Replacement Types</i>													
6AV6	(DD)	6.3	0.3	250	-2.0	1.2	62,500	1.6	2.3	1.1	2.1	B7G	19
6C5	(DD)	6.3	0.3	250	-8.0	8.0	10,000	2.0	4.4	12.0	2.2	IO	20
6N7	(DT)	6.3	0.8	250	-5.0	3.0	23,000	1.6	—	—	—	IO	22
6R7	(DD)	6.3	0.3	250	-9.0	9.5	8,500	1.9	2.6	5.2	2.4	IO	29
6SC7	(DD)	6.3	0.3	250	-2.0	2.0	53,000	1.325	2.0	3.0	2.0	IO	25
6SL7	(DT)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.15	0.9	3.5	IO	26
6SN7	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.6	0.8	4.1	IO	26
13D2 (SQ)	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.6	0.8	4.1	IO	26
7C6	(DD)	6.3	0.15	250	-1.0	1.3	100,000	1.0	2.4	2.4	1.6	B8B	2
EBC41	(DD)	6.3	0.23	250	-3.0	1.0	54,000	1.3	2.75	1.5	1.3	B8A	9
UBC41	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.75	1.5	1.3	B8A	9
<i>Current Types</i>													
5965	(DD)	6.3	0.45†	150	R _K 220Ω	8.2	7,250	6.5	3.8	{a ₁₁ 0.5 a ₁₂ 0.38}	3.0	B9A	1

(Continued)

Amplifier Triodes

Type	Heater		Volts		Anode Current (mA)	r_p (Ω)	g_m (mA/V)	Capacitances (pF)			Base	
	Volts	Amps	Anode	Grid				C_{pk}	C_{rpk}	C_{gs}	Type	Ref.
BRIMAR (Continued)												
<i>Current Types (Continued)</i>												
6AF4A		0.225	80	-2.4	16.0	2,270	6.6	2.2	0.45	1.9	B7G	60
6AM4		0.225	200	-1.0	10.0	8,700	9.8	4.4	0.16	2.4	B9A	38
6AT6	} (DD)	0.3	250	-3.0	1.0	58,000	1.2	2.3	1.1	2.1	B7G	19
6066 (SQ)												
6BQ7A	(DT)	0.4	150	-2.0	9.0	6,100	6.4	2.85	0.15	1.15	B9A	39
6BR8	(TP)	0.45	150	-1.0	18.0	5,000	8.5	2.5	0.4	1.8	B9A	67
6C4	} (SQ)	0.15	250	-8.5	10.5	7,700	2.2	1.8	1.3	1.6	B7G	15
G/6C4 (SQ)												
6J5		0.3	250	-8.0	9.0	7,700	2.6	4.2	5.0	5.0	IO	20
6J6	(DT)	0.45	100	$R_K=50\Omega$	8.5	7,100	5.3	2.2	0.4	1.6	B7G	17
12AT7	} (DT)	0.3†	250	-2.0	10.0	10,000	5.5	2.5	0.4	1.5	B9A	1
6060 (SQ)												
12AU7	} (DT)	0.3†	250	-8.5	10.5	7,700	2.2	1.6	0.5	1.5	B9A	1
6067 (SQ)												
12AX7	} (DT)	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
6057 (SQ)												
12BH7	(DT)	0.6†	250	-10.5	11.5	5,500	3.1	3.0	0.8	2.4	B9A	1
13D3	} (DT)	0.6†	250	-4.6	6.0	14,000	2.3	2.3	0.9	2.1	B9A	1
6158 (SQ)												
E88CC	(DT)	0.3	90	-1.2	15.0	2,650	12.5	3.3	0.18	1.4	B9A	39
EABC80/6AK8	(TD)	0.45	250	-3.0	1.0	58,000	1.2	1.9	1.6	2.2	B9A	2
ECC84/6CW7	(DT)	0.335	90	-1.5	12.0	4,000	6.0	2.3	0.5	2.3	B9A	28
ECC85	(DT)	0.435	250	-2.0	10.0	97,000	6.0	3.0	0.18	1.5	B9A	39
ECC88	(DT)	0.365	90	-1.3	15.0	2,600	12.5	3.3	0.18	1.4	B9A	39
ECF80	(TP)	0.3	100	-2.0	14.0	4,000	5.0	2.5	1.8	1.5	B9A	25
ECL80/6AB8	(TP)	0.3	100	-2.3	4.0	12,500	1.4	2.0	0.3	0.9	B9A	13
ECL82/6BM8	(TP)	0.78	100	0	3.5	27,000	2.5	2.7	4.0	4.0	B9A	37
PCC84/7AN7	(DT)	0.3		Other data as Type ECC84								
PCF80	(TP)	0.3	100	-2.0	14.0	4,000	5.0	2.5	1.8	1.5	B9A	25
12AV6	(DD)	0.15	250	-2.0	1.2	62,500	1.6	2.3	1.1	2.1	B7G	19
12AE6	(DD)	0.15	12.6	0	0.75	15,000	1.0	1.8	1.1	2.0	B7G	19
12AT6	(DD)	0.15		Other data as Type 6AT6								
PCL84	(TP)	0.3	200	-1.7	3.0	16,200	4.0	4.0	2.5	2.7	B9A	53
PCL82	(TP)	0.3		Other data as Type ECL82								
PCL85	(TP)	0.3	100	0	10.0	9,100	5.5	3.0	2.5	2.0	B9A	66
HABC80	(TD)	0.15		Other data as Type EABC80								

COSSOR

Obsolete Types

1H5		1.4*	0.05	90	0	0.15	240,000	0.275	1.1	4.6	1.0	IO	91
210DDT	(DD)	2.0*	0.1	100	0	2.3	25,000	1.1	3.0	10.5	1.6	B5	5
210DET		2.0*	0.1	150	-4.5	3.8	13,000	1.1	—	—	—	B4	1
210HF		2.0*	0.1	150	-3.0	1.6	15,800	1.5	—	—	—	B4	1
210HL		2.0*	0.1	150	-3.0	1.6	22,000	1.1	—	—	—	B4	1
210LF		2.0*	0.1	150	-4.5	4.8	10,000	1.4	—	—	—	B4	1
210RC		2.0*	0.1	150	-1.5	0.85	50,000	0.8	5.0	2.0	6.0	B4	1
41FP		4.0	1.0	250	-18.0	19.0	3,600	2.8	6.6	3.0	4.6	B5	1
41MH		4.0	1.0	200	-1.5	3.2	18,000	4.0	9.5	14.0	2.5	B5	1
41MHL		4.0	1.0	200	-3.0	4.0	11,500	4.5	9.5	14.0	2.5	B5	1
41MTA		4.0	1.0	100	0	4.9	18,000	4.0	—	—	—	B5	1
41MTB		4.0	1.0	100	0	3.6	—	2.6	—	—	—	B5	1
41MTL		4.0	1.0	200	-2.5	5.9	15,000	3.0	8.4	8.9	2.6	B5	1
DDT	(DD)	4.0	1.0	200	-3.0	3.0	17,000	2.4	4.0	6.5	1.0	B7	7
12SC7	(DT)	12.6	0.15	250	-2.0	2.0	53,000	1.3	2.2	3.0	2.0	IO	25
12SR7	(DD)	12.6	0.15	250	-9.0	9.5	8,500	1.9	3.6	2.8	2.4	IO	31
13DHA	(DD)	13.0	0.2	250	-1.5	1.0	83,000	1.5	—	—	1.0	B7	7
202DDT	(DD)	20.0	0.2	200	-3.0	3.0	17,000	2.4	4.0	6.5	1.0	B7	7
<i>Replacement Types</i>													
6C5		6.3	0.3	250	-8.0	8.0	10,000	2.0	4.4	12.0	2.2	IO	20
6J5		6.3	0.3	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	IO	20
6Q7	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	5.0	3.8	1.4	IO	29
6SL7	(DT)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.15	0.9	3.5	IO	26
6SN7	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.8	0.8	3.8	IO	26
7C6	(DD)	6.3	0.15	250	-1.0	1.3	100,000	1.0	2.4	3.0	1.4	B8B	2
OM4	(DD)	6.3	0.2	250	-5.0	5.5	15,000	2.2	2.5	3.6	1.4	IO	29
<i>Current Types</i>													
6BQ7A	(DT)	6.3	0.4	150	-2.0	9.0	6,100	6.4	2.6	0.12	1.2	B9A	39
6C4		6.3	0.15	250	-8.5	10.5	7,700	2.2	1.8	1.3	1.6	B7G	15

Type	Heater		Volts		Anode Current (mA)	r_a (Ω)	g_m (mA/V)	Capacitances (pF)			Base	
	Volts	Amps	Anode	Grid				c_{pk}	c_{ek}	c_{go}	Type	Ref.
COSSOR (Continued)												
<i>Current Types (Continued)</i>												
I2BH7 (DT)	6.3	0.6†	250	-10.5	11.5	5,500	3.1	3.0	0.8	2.4	E9A	1
EABC80/6AK8 (TD)	6.3	0.45	100	-1.0	0.8	54,000	1.45	1.9	1.4	2.0	B9A	2
EBC41/62DDT (DD)	6.3	0.23	250	-3.0	1.0	54,000	1.3	2.75	1.5	1.3	B8A	9
ECC81 (DT)	6.3	0.3†	170	-1.5	7.0	12,000	4.8	2.2	0.4	1.5	B9A	1
ECC82 (DT)	6.3	0.3†	250	-8.5	10.5	7,700	2.2	1.6	0.5*, 0.35*	1.5	B9A	1
ECC83 (DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
ECC84 (DT)	6.3	0.34	90	-1.5	12.0	4,000	6.0	2.1, 2.3	0.16, 0.45	1.1, 2.3	B9A	28
ECC85/6AQ8 (DT)	6.3	0.435	230	-2.0	10.0	9,700	6.0	3.0	0.18	1.5	B9A	39
ECC91 (DT)	6.3	0.45	100	-0.85	8.5	7,100	5.3	2.2	0.4	1.6	B7G	17
ECL80/6AB8 (TP)	6.3	0.3	100	-2.3	4.0	12,500	1.4	2.0	0.3	0.9	B9A	13
PCC84/7AN7 (DT)	7.0	0.3	90	-1.5	12.0	—	6.0	2.3	0.45	1.1, 2.3*	B9A	28
PCC89 (DT)	7.2	0.3	90	-1.2	15.0	3,000	12.0	4.0, 6.8	0.4, 0.2	1.7, 3.1	B9A	28
PCC85 (DT)	9.0	0.3	200	-2.1	10.0	8,300	5.8	0.003	0.18	1.5	B9A	39
PCL83 (TP)	12.6	0.3	250	-8.5	10.5	7,700	2.2	2.0	0.35	1.6	B9A	27
PCL84 (TP)	15.0	0.3	200	-1.7	3.0	16,200	4.0	4.0	2.5	2.7	B9A	53
PCL82 (TP)	16.0	0.3	100	0	3.5	28,000	2.5	2.7	4.0	4.0	B9A	37
UCC84 (DT)	21.0	0.3		Other data as Type PCC84							B9A	28
UCC85 (DT)	26.0	0.1		Other data as Type PCC85							B9A	39
UCL83 (TP)	40.0	0.1	200	-1.5	2.4	34,000	2.5	—	—	—	B9A	27
UCL82 (TP)	50.0	0.1	100	0	3.5	28,000	2.5	2.7	4.0	4.0	B9A	37
PCL85 (TP)	18.0	0.3	100	0	10.0	9,000	5.5	—	—	—	B9A	66

EDISWAN MAZDA*Obsolete Types*

H141D (SD)	1.4*	0.05	90	-0.6	0.1	260,000	0.25	1.8	6.0	2.3	MO	6
HL2	2.0*	0.1	150	-2.0	2.0	24,000	1.35	3.0	5.25	4.5	B4	1
HL21DD (DD)	2.0*	0.15	150	-2.0	2.0	25,000	1.3	2.5	7.0	3.5	B5	5
HL22	2.0*	0.1	150	-2.0	2.0	25,000	1.3	2.75	5.0	4.5	MO	2
HL22DD (DD)	2.0*	0.1	150	-2.0	2.0	25,000	1.3	2.25	6.75	3.25	MO	7
HL23	2.0*	0.05	150	-2.4	1.5	27,000	1.2	2.75	5.25	5.0	MO	2
HL23DD (DD)	2.0*	0.05	150	-2.8	1.5	24,000	1.05	2.0	6.0	3.5	MO	7
I2	2.0*	0.1	150	-3.8	4.0	12,500	1.5	3.75	5.25	4.75	B4	1
L21DD (DD)	2.0*	0.1	150	-4.2	4.0	12,000	1.55	2.25	6.75	3.25	B5	5
L22DD (DD)	2.0*	0.1	150	-4.2	4.0	12,000	1.55	2.25	6.75	3.25	MO	7
AC/2HL	4.0	1.0	200	-1.75	4.9	15,000	5.0	9.0	6.0	6.5	B5	1
AC/HL	4.0	1.0	200	-3.5	5.0	12,500	2.8	8.0	11.5	3.25	B5	1
AC/HLDD (DD)	4.0	1.0	200	-3.0	4.3	14,500	2.5	5.0	9.75	2.0	B7	7
AC/HL/DDD (TD)	4.0	1.0	200	-3.0	4.9	13,500	2.6	3.75	9.5	2.0	B9	5
AC/P4	4.0	1.0	700	For electrostatic scanning				8.4	4.4	5.7	B5	9
HL41	4.0	0.65	250	-4.5	7.0	11,500	3.1	5.25	4.5	5.25	MO	16
HL41DD (DD)	4.0	0.65	250	-5.2	6.0	13,500	2.2	3.5	4.5	3.5	MO	10
HL42DD (DD, VM)	4.0	0.65	65	-1.25	2.8	12,500	1.85	3.5	4.5	3.5	MO	10
P41	4.0	0.95	250	-11.8	16.0	3,700	4.5	7.0	4.75	3.5	MO	16
V312	4.0	0.65	250	-4.8	6.0	13,000	2.3	4.5	4.5	2.2	B5	13
6F11 (P)	6.3	0.2	100	-1.8	5.75	9,000	2.85	—	—	—	B8A	8
P61	6.3	0.6	250	-11.8	16.0	3,700	4.5	7.0	4.75	3.5	MO	16
HL133	13.0	0.2	200	-3.3	6.0	12,500	2.9	4.0	5.0	4.75	MO	19
HL133DD (DD)	13.0	0.2	250	-5.4	6.0	14,000	2.3	3.5	4.5	3.5	MO	10
HL1320	13.0	0.2	200	-3.3	6.0	10,000	3.0	5.0	5.25	2.5	B7	23
HLDD1320 (DD)	13.0	0.2	200	-3.0	4.3	16,000	1.9	4.25	10.5	2.0	B7	7

Replacement Types

6F1 (P)	6.3	0.35	200	-1.8	12.6	5,300	11.3	—	—	—	B8A	17
6F12 (P)	6.3	0.3	250	-2.0	12.6	8,000	9.4	—	—	—	B7G	21
6F13 (P)	6.3	0.35	200	-1.8	12.6	5,300	11.3	—	—	—	B8A	8
6L1 (DT)	6.3	0.4	250	-11.5	10.0	6,200	2.8	2.8	2.3	2.7	B8A	13
6L18	6.3	0.3	250	-13.3	12.0	3,000	4.8	4.6	5.8	2.2	B8A	6
6L19 (DT)	6.3	0.4	250	-3.1	4.0	20,000	2.75	2.9	2.5	2.5	B8A	13
6L34	6.3	0.3	250	-1.5	10.0	10,500	8.5	5.1	0.1	3.6	B7G	24
6LD3 (DD)	6.3	0.23	100	-0.7	0.8	54,000	1.4	3.0	1.9	1.3	B8A	9
6LD20 (DD)	6.3	0.25	250	-5.9	5.0	13,500	2.3	3.6	3.7	1.5	B8A	9
20L1 (DT)	12.6	0.2	250	-11.5	10.0	6,200	2.8	2.8	2.3	2.7	B8A	13
10LD3 (DD)	13.0	0.1	100	-0.7	0.8	54,000	1.4	3.0	1.9	1.3	B8A	9
10LD11 (DD)	15.0	0.1	250	-5.9	5.0	13,500	2.3	3.6	3.7	1.5	B8A	9
10L1	19.0	0.1	250	-1.5	10.0	10,500	8.5	5.1	0.1	3.6	B7G	24
10F1 (P)	22.0	0.1	200	-1.8	12.6	5,300	11.3	—	—	—	B8A	17

Current Types

6J30L2 (DT)	6.3	0.3	200	-7.7	10.0	5,300	3.4	2.5	2.1	2.5	B9A	39
6F23 (P)	6.3	0.3	170	-1.9	12.6	4,800	11.6	—	—	—	B9A	10
6F24 (P)	6.3	0.3	170	-1.9	12.7	3,400	19.0	—	—	—	B9A	10

(Continued)

Amplifier Triodes

Type	Heater		Volts		Anode Current (mA)	r_p (Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Grid				c_{pL}	c_{pK}	c_{pA}	Type	Ref.	
EDISWAN MAZDA (Continued)													
<i>Current Types (Continued)</i>													
6L12	(DT)	6.3	0.435	250	-2.3	10.0	9,700	5.9	3.0	1.2	1.5	B9A	39
6L13	(DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
6LD12	(TD)	6.3	0.45	250	-3.0	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
6LD13	(DD)	6.3	0.2	100	-0.7	0.8	54,000	1.4	2.6	2.9	1.9	B9A	54
6PL12	(T, BT)	6.3	0.78	100	0	3.5	28,000	2.5	2.7	4.3	4.2	B9A	37
30L1	(DT)	7.0	0.3	90	-1.5	12.0	4,000	6.0	2.3	0.5	1.1	B9A	28
30L15	(DT)	7.0	0.3	90	-1.2	15.0	3,100	9.0	3.1	—	—	B9A	28
30F5	(P)	7.3	0.3	170	-1.85	12.6	—	11.0	—	—	—	B9A	10
30FL1	(T, BT)	9.4	0.3	200	-7.7	10.0	5,300	3.4	3.6	2.6	2.7	B9A	49
10LD13	(DD)	13.0	0.1	100	-0.7	0.8	54,000	1.4	2.6	2.9	1.9	B9A	54
30PL1	(T, BT)	13.0	0.3	200	-7.7	10.0	5,300	3.4	2.6	2.0	2.4	B9A	27
30PL12	(T, BT)	16.0	0.3	100	0	3.5	28,000	2.5	2.7	4.0	4.0	B9A	37
30PL13	(T, BT)	16.0	0.3	200	-7.7	10.0	5,300	3.4	2.1	1.9	2.3	B9A	37
30PL14	(T, BT)	16.0	0.3	200	-7.7	10.0	5,300	3.4	2.1	1.9	2.3	B9A	37
10L14	(DT)	26.0	0.1	200	-2.1	10.0	8,300	5.8	3.0	1.2	1.5	B9A	39
10LD12	(TD)	28.0	0.1	200	-2.3	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
10PL12	(T, BT)	50.0	0.1	100	0	3.5	28,000	2.5	3.0	4.3	4.5	B9A	37
EMITRON													
<i>Current Types</i>													
6AT6	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.3	1.1	2.1	B7G	19
7C6	(DD)	6.3	0.15	250	-1.0	1.3	100,000	1.0	2.4	2.1	1.5	B8B	2
FERRANTI													
<i>Obsolete Types</i>													
HP2	(DT)	2.0*	0.4	120	0	4.0	8,000	—	—	—	—	B7	11
DA		13.0	0.2	200	-2.6	3.7	20,000	2.2	7.1	6.7	3.5	B7	23
HAD	(DD)	13.0	0.2	200	-2.0	4.5	18,000	2.9	—	—	—	B7	7
<i>Replacement Types</i>													
1G6	(DT)	1.4*	0.1	90	0	1.0	45,000	0.68	—	—	—	IO	96
1H5	(SD)	1.4*	0.05	90	0	0.15	240,000	0.28	1.1	4.6	1.0	IO	91
HL2		2.0*	0.1	120	-3.0	4.5	10,000	1.4	—	—	—	B4	1
H2D		2.0*	0.1	100	0	3.5	15,000	1.3	—	—	—	B5	5
L2		2.0*	0.1	120	-6.0	7.5	7,000	1.6	—	—	—	B4	1
D4		4.0	1.0	200	-3.0	4.0	12,500	3.3	8.8	10.0	2.4	B5	1
H4D	(DD)	4.0	1.0	200	-2.5	5.5	14,500	2.7	3.5	5.5	2.0	B7	7
6A6	}	(DT)	6.3	0.8	250	-5.0	3.0	22,600	1.55	—	—	UX7	5
6N7													
6C5		6.3	0.3	250	-8.0	8.0	10,000	2.0	4.4	12.0	2.2	IO	20
6F8	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	IO	28
6J5		6.3	0.3	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	IO	20
6J6	(DT)	6.3	0.45	100	-0.85	8.5	7,100	5.3	2.2	0.4	1.6	B7G	17
6Q7	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	3.2	5.0	1.5	IO	29
6SQ7	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	4.2	3.4	1.8	IO	31
7C6	(DD)	6.3	0.15	250	-1.0	1.3	100,000	1.0	2.4	2.4	1.6	B8B	2
7K7	(DD)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.6	3.1	2.7	B8B	21
EBC41	(DD)	6.3	0.23	250	-3.0	1.0	54,000	1.3	2.75	1.5	1.3	B8A	9
12Q7	(DD)	12.6	0.15		Other data as Type 6Q7								
12SQ7	(DD)	12.6	0.15		Other data as Type 12SQ7								
12SC7	(DT)	12.6	0.15	250	-2.0	2.0	53,000	1.3	2.2	3.0	2.0	IO	25
12SL7	(DT)	12.6	0.15		Other data as Type 6SL7								
UBC41	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.75	1.5	1.3	B8A	9
<i>Current Types</i>													
6SL7	(DT)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.15	0.9	3.5	IO	26
6SN7	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.6	0.8	4.1	IO	26
12AT7/ECC81	(DT)	6.3	0.3†	170	-1.5	7.0	12,000	4.8	2.2	0.4	1.5	B9A	1
12AU7/ECC82	(DT)	6.3	0.3†	250	-8.5	10.5	7,700	2.2	1.8	0.37	1.5	B9A	1
12AX7/ECC83	(DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.33	1.7	B9A	1
EABC80	(DT)	6.3	0.45	250	-3.0	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
PCC84/7AN7	(DT)	7.0	0.3	90	-1.5	12.0	4,000	6.0	2.3	0.5	2.3	B9A	28
PCC85/9AQ8	(DT)	9.5	0.3	170	-1.5	10.0	8,000	6.2	0.003	0.18	1.5	B9A	39
UCC85	(DT)	26.0	0.1	200	-2.1	10.0	—	5.8	0.003	0.18	1.5	B9A	39
G.E.C.													
<i>Obsolete Types</i>													
HD22	(DD)	2.0*	0.2	150	-3.0	1.2	18,000	1.5	1.8	15.0	3.6	B5	5
HD23	(DD)	2.0*	0.15	150	-2.0	1.0	28,600	1.4	2.75	10.0	2.5	B5	5
L21		2.0*	0.1	150	-6.0	2.2	8,900	1.8	4.4	3.4	5.9	B4	1
DH42	(DD)	4.0	0.6	250	-3.0	1.1	58,000	1.2	2.5	4.8	2.0	B7	7

Type	Heater		Volts		Anode Current (mA)	r_a (Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Grid				C_{pk}	C_{sk}	C_{sa}	Type	Ref.	
G.E.C. (Continued)													
<i>Obsolete Types (Continued)</i>													
H42	4.0	0.6	250	-2.0	1.0	66,000	1.5	2.6	5.3	3.0	B7	23	
MH4	4.0	1.0	250	-4.0	5.0	11,100	3.6	7.0	6.5	5.7	B5	1	
MH40	4.0	1.0	200	-3.0	2.7	18,750	2.4	6.0	4.0	7.3	B5	1	
ML4	4.0	1.0	250	-16.0	14.0	2,860	4.2	7.2	4.5	6.3	B5	1	
DH30	(DD)	13.0	0.3	200	-2.0	2.8	18,000	4.5	4.8	2.4	2.86	B7	7
H30		13.0	0.3	250	-1.7	5.5	13,300	6.0	5.0	2.7	3.5	B7	23
L30		13.0	0.3	200	-8.0	25.0	2,860	4.2	5.0	2.7	3.5	B7	16
<i>Replacement Types</i>													
HD14	(SD)	1.4*	0.05	90	0	0.14	240,000	0.28	0.48	3.5	1.1	IO	91
HD24	(DD)	2.0*	0.1	150	-1.5	1.7	28,600	1.4	2.75	10.0	2.5	B5	5
HL2		2.0*	0.1	150	-3.0	1.8	18,000	1.5	8.0	9.0	4.0	B4	1
MHD4	(DD)	4.0	1.0	250	-4.0	4.0	18,200	2.2	2.42	4.6	3.76	B7	7
MHL4		4.0	1.0	250	-8.0	8.0	8,000	2.5	5.4	4.5	3.9	B5	1
B36	(DT)	12.6	0.3	250	-8.0	9.0	7,700	2.6	3.7	1.2	4.5	IO	26
B65	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.95	0.77	4.15	IO	26
B729	(DT)	6.3	0.3	200	-7.9	10.0	5,300	3.4	2.5	2.1	2.5	B9A	39
DH63	(DD)	6.3	0.3	250	-3.0	1.1	58,000	1.2	2.5	7.0	1.6	IO	29
DH81	(DD)	6.3	0.3	250	-0.68	1.0	58,000	1.2	2.4	1.4	1.7	B8B	12
DL82	(DD, VM)	6.3	0.3	250	-3.0	5.0	17,000	1.4	2.0	1.5	2.0	B8B	12
E4BC80/DH719	(TD)	6.3	0.45	250	-3.0	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
EBC41/DH718	(DD)	6.3	0.23	250	-3.0	1.0	54,000	1.3	3.0	1.9	1.3	B8A	9
ECC81/													
B309	(DT)	6.3	0.3†	250	-2.0	10.0	10,000	5.5	2.5	0.4	1.6	B9A	1
ECC82/B329/12AU7	(DT)	6.3	0.3†	250	-8.5	10.5	7,700	2.2	1.6	0.5	1.5	B9A	1
ECC83/B339/12AX7	(DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
ECC84	(DT)	6.3	0.33	90	-1.5	12.0	4,000	6.0	2.1, 2.3	0.16, 0.45	1.1, 2.3	B9A	28
ECC85/B719	(DT)	6.3	0.435	230	-2.0	10.0	9,700	6.0	3.0	0.18	1.5	B9A	39
EF86/Z729		6.3	0.2	250	-5.0	4.0	16,000	2.0	—	—	—	B9A	23
H63		6.3	0.3	250	-2.0	1.0	66,000	1.5	2.3	3.7	2.5	IO	18
L63		6.3	0.3	250	-8.0	9.0	7,700	2.6	3.8	3.2	4.1	IO	20
L77		6.3	0.15	250	-8.5	10.5	7,700	2.2	1.8	1.3	1.6	B7G	15
B349	(DT)	7.0	0.3	90	-1.2	15.0	3,100	9.0	3.7	—	—	B9A	28
PCL83/LN309	(TP)	12.6	0.3	250	-8.5	10.5	7,700	2.2	1.7	0.3	1.5	B9A	27
DH76	(DD)	13.0	0.16	250	-3.0	1.1	5,800	1.2	1.5	5.0	1.5	IO	29
UBC81/DH119	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.3	2.3	1.2	B9A	54
DH101	(DD)	19.0	0.1	250	-3.0	1.0	58,000	1.2	2.4	1.4	1.7	B8B	12
DH107	(DD)	19.0	0.1	250	-3.0	1.0	58,000	1.2	2.0	1.1	1.9	B7G	19
U4BC80/DH109	(TD)	28.0	0.1	200	-2.3	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
<i>Current Types</i>													
A1714**		6.3	0.5	250	—	10.0	—	8.5	3.0	1.3	0.9	B7G	81
A2521***		6.3	0.3	250	—	16.0	—	15.0	3.5	0.06	1.6	B9A	70
A2899**		6.3	0.3	250	—	16.0	—	15.0	3.5	0.7	1.1	B9A	71
A2688**		6.3	0.37	200	—	16.0	—	15.0	2.7	0.2	1.1	B7G†	24
EBC90/DH77	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.0	1.1	1.9	B7G	19
R5559†		6.3	0.3	250	—	25.0	—	25.0	12.0	5.0	2.0	B9A	—
R417A**		6.3	0.3	180	—	25.0	—	25.0	6.5	0.35	1.8	B9A	—
PCC84/B319	(DT)	7.0	0.3	—	-1.5	12.0	4,000	6.0	2.3	0.45	—	B9A	28
LN319	(TP)	13.0	0.3	200	-7.9	10.0	5,300	3.4	2.6	2.0	2.4	B9A	27
UBC41/DH118	(DD)	14.0	0.1	250	-3.0	1.0	54,000	1.3	3.0	1.9	1.3	B8A	9
UCC85/B109	(DT)	26.0	0.1	200	-2.1	10.0	—	6.2	0.003	0.18	1.5	B9A	39
UCL82/LN119	(TP)	50.0	0.1	100	0	3.5	28,000	2.5	2.7	4.3	4.2	B9A	37

** V.h.f. *** U.h.f. † Video. † Flying leads.

HVAC

Obsolete Types

XD1.5V	1.5*	0.08	50	0	0.45	50,000	0.4	—	—	—	Sm4	1
XH1.5V	1.5*	0.08	50	0	0.45	50,000	0.5	—	—	—	Sm4	1
XL1.5V	1.5*	0.08	50	-1.0	0.7	20,000	0.6	—	—	—	Sm4	1
XLO1.5V	1.5*	0.08	50	-1.0	0.9	20,000	0.65	—	—	—	Sm4	1
L210	2.0*	0.1	150	-6.0	4.2	7,500	1.6	—	—	—	B4	1
XD2.0V	2.0*	0.08	50	0	0.65	38,000	0.56	—	—	—	Sm4	1
XH2.0V	2.0*	0.08	50	0	0.45	50,000	0.56	—	—	—	Sm4	1
XL2.0V	2.0*	0.08	50	-1.0	1.0	12,500	0.84	—	—	—	Sm4	1

(Continued)

Amplifier Triodes

Type	Heater		Volts		Anode Current (mA)	r_a (Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Grid				C_{pk}	C_{aE}	C_{pa}	Type	Ref.	
HIVAC (Continued)													
<i>Obsolete Types (Continued)</i>													
XLO2.0V		2.0*	0.08	50	-1.0	1.1	12,500	0.92	—	—	—	Sm4	1
ACDDT	(DD)	4.0	1.0	200	-4.0	5.0	15,000	2.3	2.4	5.1	3.5	B7	7
ACHL		4.0	1.0	200	-2.75	6.0	10,000	3.5	6.8	7.0	5.5	B5	1
12AU7		12.6	0.15	250	-8.5	10.5	7,700	2.2	1.6	0.5	1.5	B9A	1
DDT13	(DD)	13.0	0.3	200	-4.0	5.0	15,000	2.3	2.4	5.1	3.3	B7	7
HL13		13.0	0.3	200	-2.75	6.0	10,000	3.5	6.5	6.9	5.5	B7	23
<i>Current Types</i>													
XFR3		1.25*	0.12	135	-5.0	4.0	—	1.65	1.35	3.25	1.3	B5A	4
XR8		6.3	0.15	100	-2.5	8.0	4,750	4.2	—	—	—	B8D	8
MARCONI													
<i>Obsolete Types</i>													
HD14	(SD)	1.4*	0.05	90	0	0.14	240,000	0.28	0.48	3.5	1.1	IO	91
HD22	(DD)	2.0*	0.2	150	-3.0	1.2	18,000	1.5	1.8	15.0	3.6	B5	5
HD23	(DD)	2.0*	0.15	150	-2.0	1.0	28,600	1.4	2.75	10.0	2.5	B5	5
L21		2.0*	0.1	150	-6.0	2.2	8,900	1.8	4.4	3.4	5.9	B4	1
DH42	(DD)	4.0	0.6	250	-3.0	1.1	58,000	1.2	2.5	4.8	2.0	B7	7
H42		4.0	0.6	250	-2.0	1.0	66,000	1.5	2.6	5.3	3.0	B7	23
MH40		4.0	1.0	200	-3.0	2.7	18,750	2.4	6.0	4.0	7.3	B5	1
ML4		4.0	1.0	250	-16.0	14.0	2,860	4.2	7.2	4.5	6.3	B5	1
DH81	(DD)	6.3	0.3	250	-0.68	1.0	58,000	1.2	2.4	1.4	1.7	B8B	12
DL82	(DD, VM)	6.3	0.3	250	-3.0	5.0	17,000	1.4	2.0	1.5	2.0	B8B	12
DH30	(DD)	13.0	0.3	200	-2.0	2.8	18,000	4.5	4.8	2.4	2.86	B7	7
H30		13.0	0.3	250	-1.7	5.5	13,300	6.0	5.0	2.7	3.5	B7	23
L30		13.0	0.3	200	-8.0	25.0	2,860	4.2	5.0	2.7	3.5	B7	16
DH101	(DD)	19.0	0.1	250	-3.0	1.0	58,000	1.2	2.4	1.4	1.7	B8B	12
<i>Replacement Types</i>													
HD24	(DD)	2.0*	0.1	100	0	0.4	28,600	1.4	2.75	10.0	2.5	B5	5
HL2		2.0*	0.1	150	0	1.75	18,000	1.5	8.0	9.0	4.0	B4	1
MH4Met		4.0	1.0	200	-3.0	4.7	11,100	3.6	7.0	6.5	5.7	B5	1
MH41		4.0	1.0	200	-1.5	5.2	13,300	6.0	8.5	4.1	3.2	B5	1
MHD4Met	(DD)	4.0	1.0	200	-4.0	4.0	18,200	2.2	2.42	4.6	3.76	B7	7
MHL4Met		4.0	1.0	200	-5.0	9.0	8,000	2.5	5.4	4.5	3.9	B5	1
DL63	(DD)	6.3	0.3	250	-3.0	—	22,500	1.6	1.5	3.5	2.3	IO	29
H63		6.3	0.3	250	-2.0	1.0	66,000	1.5	2.3	3.7	2.5	IO	18
DH76	(DD)	13.0	0.16	175	-1.3	0.4	58,000	1.2	1.5	5.0	1.5	IO	29
<i>Current Types</i>													
B65	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.95	0.77	4.15	IO	26
DH63	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.5	7.0	1.6	IO	29
DH77/6AT6	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.0	1.1	1.9	B7G	19
DH149/7C6	(DD)	6.3	0.15	250	-1.0	1.3	100,000	1.0	2.4	3.0	1.4	B8B	2
EABC80/DH719	(TD)	6.3	0.45	250	-3.0	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
EBC33/DH147	(DD)	6.3	0.2	250	-5.5	5.0	15,000	2.0	—	—	—	IO	29
EBC41/DH150	(DD)	6.3	0.23	250	-3.0	1.0	54,000	1.3	—	—	—	B8A	9
ECC81/B309	(DT)	6.3	0.3†	250	-2.0	10.0	11,000	5.5	2.5	0.4	1.6	B9A	1
ECC82/B329	(DT)	6.3	0.3†	250	-8.5	10.5	7,700	2.2	1.6	0.5	1.5	B9A	1
ECC83/B339	(DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
ECC85/B719	(DT)	6.3	0.435	250	-2.3	10.0	9,600	5.9	3.0	0.18	1.5	B9A	39
ECL80/LN152	(TP)	6.3	0.3	100	-2.3	4.0	19,000	1.4	2.0	0.3	0.9	B9A	13
EF86/7Z29		6.3	0.2	250	-2.0	3.0	16,000	2.0	—	—	—	B9A	23
L63		6.3	0.3	250	-8.0	9.0	7,700	2.6	3.8	3.2	4.1	IO	20
L77		6.3	0.15	250	-8.5	10.5	7,700	2.2	1.8	1.3	1.6	B7G	15
PCC84/B319	(DT)	7.0	0.3	90	-1.5	12.0	4,000	6.0	2.3	0.45	—	B9A	28
12AT6	(DD)	12.6	0.15	100	-3.0	0.8	54,000	1.3	2.3	1.1	2.1	B7G	19
B36	(DT)	12.6	0.3	250	-8.0	9.0	7,700	2.6	3.7	1.2	4.5	IO	26
PCL83/LN309	(TP)	12.6	0.3	250	-8.5	10.5	—	2.2	—	—	—	B9A	27
UBC41/DH142	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.75	1.5	1.3	B8A	9
DL145	(DD)	15.0	0.1	150	-2.25	1.25	47,000	3.4	3.6	3.7	1.5	B8A	9
PCL82	(TP)	16.0	0.3	100	0	3.5	28,000	2.5	2.7	4.0	4.0	B9A	37
DH107	(DD)	19.0	0.1	250	-3.0	1.0	58,000	1.2	2.0	1.1	1.9	B7G	19
UCC85	(TD)	26.0	0.1	200	-2.1	10.0	8,300	5.8	0.003	0.008	0.008	B9A	39
UABC80	(DT)	28.0	0.1	200	-2.3	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
UCL83	(TP)	38.0	0.1	170	-9.5	30.0	5,500	5.5	2.3	0.32	1.6	B9A	27
MULLARD													
<i>Obsolete Types</i>													
DAC1	(SD)	1.4*	0.05	90	0	0.14	240,000	0.275	—	—	—	Ct8	32
DA1		2.0*	0.05	40	—	0.25	30,000	0.4	3.8	5.4	1.6	Sm4	1
DA2		2.0*	0.05	40	—	2.15	13,600	0.5	3.4	5.4	1.4	Sm4	1

(Continued)

Type	Heater		Volts		Anode Current (mA)	r _a (Ω)	g _m (mA/V)	Capacitances (pF)			Base			
	Volts	Amps	Anode	Grid				c _{pk}	c _{ak}	c _{gr}	Type	Ref.		
MULLARD (Continued)														
<i>Obsolete Types (Continued)</i>														
DA3		2.0*	0.055	40	-2.8	1.8	7,600	0.62	—	—	—	Sm4	1	
KBC32	(DD)	2.0*	0.05	100	0	2.4	21,000	1.2	1.9	7.0	3.1	IO	88	
PMIHF		2.0*	0.1	100	0	2.3	22,500	0.8	—	—	—	B4	1	
PMILF		2.0*	0.1	100	0	5.8	12,000	0.9	—	—	—	B4	1	
PM2H1		2.0*	0.1	135	-1.5	2.2	21,500	1.4	3.6	5.0	3.2	B4	1	
TDD2A	(DD)	2.0*	0.12	135	-1.5	1.95	25,000	1.2	2.5	7.6	3.7	B5	5	
164V		4.0	0.65	200	-9.0	12.0	4,700	3.4	8.6	8.4	3.2	B5	1	
354V		4.0	0.65	250	-4.5	6.5	11,500	3.5	5.3	4.2	3.3	B5	1	
904V		4.0	0.65	200	-2.0	2.0	36,000	2.0	8.8	7.8	3.4	B5	1	
TT4		4.0	1.0	250	-16.0	20.0	3,300	3.2	3.7	7.0	3.4	B5	1	
TT4A		4.0	1.0	250	-9.0	20.0	4,400	4.1	—	—	—	B5	1	
75	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	4.2	3.4	1.8	UX6	4	
6C5		6.3	0.3	250	-8.0	8.0	10,000	2.0	4.4	12.0	2.2	IO	20	
EBC3	(DD)	6.3	0.2	250	-5.5	5.0	15,000	2.0	—	—	—	Ct8	7	
EC31		6.3	0.65	250	-16.0	20.0	3,300	3.2	—	—	—	IO	20	
ECS3		6.3	0.25	200	-3.3	7.5	11,400	2.9	1.3	0.13	1.3	B3G	1	
ECC31	(DT)	6.3	0.95	250	-4.6	6.0	14,000	2.3	4.0	1.9	3.4	IO	22	
EF37	(P)	6.3	0.2	150	-3.0	6.0	10,000	2.8	—	—	—	IO	8	
HL13	}	13.0	0.2	200	-3.7	5.0	12,000	3.3	3.9	4.6	3.1	Ct8	3	
HL13C														
TDD13C														
	(DD)	13.0	0.2	200	-5.0	4.0	13,500	2.0	3.5	2.9	—	B7	23	
												B7	7	
<i>Replacement Types</i>														
IH5	(SD)	1.4*	0.05	90	0	0.15	240,000	0.275	1.1	4.6	1.0	IO	91	
DAC32	(SD)	1.4*	0.05	90	0	0.15	240,000	0.275	1.3	6.0	1.0	IO	91	
DCC90	(DT)	1.4*	0.22†	90	-2.5	3.7	8,300	1.8	0.9	1.0	3.2	B7G	8	
TDD4	(DD)	4.0	0.65	250	-7.0	4.0	13,500	2.0	3.5	2.9	—	B7	7	
6J5		6.3	0.3	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	IO	20	
6Q7	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	5.0	3.8	1.4	IO	29	
6SN7		6.3	0.6	250	-8.0	9.0	7,700	2.6	2.8	0.8	3.8	IO	26	
EBC33	(DD)	6.3	0.2	250	-5.5	5.0	15,000	2.0	—	—	—	IO	29	
EBC41	(DD)	6.3	0.23	250	-3.0	1.0	58,000	1.2	2.75	1.5	1.3	B8A	9	
EBC90	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.3	1.1	2.1	B7G	19	
EC52		6.3	0.43	250	-2.6	10.0	9,200	6.5	5.2	1.3	3.1	B9G	3	
EC92		6.3	0.15	250	-2.0	10.0	11,000	5.5	2.6	0.24	1.6	B7G	66	
ECC32	(DT)	6.3	0.95	250	-4.6	6.0	14,000	2.3	4.3	2.0	4.3	IO	26	
ECC33	(DT)	6.3	0.4	250	-4.0	9.0	9,700	3.6	3.5	1.5, 1.2	2.5	IO	26	
ECC34	(DT)	6.3	0.95	250	-16.0	10.0	5,200	2.2	3.5	1.8	4.0	IO	26	
ECC35	(DT)	6.3	0.4	250	-2.5	2.3	34,000	2.0	3.0	1.0, 1.3	2.5, 3.0	IO	26	
ECC40	(DT)	6.3	0.6	250	-5.2	6.0	11,000	2.7	3.0, 2.6	1.15	2.6, 2.7	B8A	13	
EF37A	(P)	6.3	0.2	150	-3.0	6.0	10,000	2.8	—	—	—	IO	8	
UC92		9.5	0.1	170	-1.0	8.5	11,000	5.9	2.6	0.24	1.6	B7G	66	
12Q7	(DD)	12.6	0.15		Other data as Type 6Q7									
12SN7	(DT)	12.6	0.3		Other data as Type 6SN7									
HBC90	(DD)	12.6	0.15		Other data as Type EBC90									
UBC41	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.75	1.5	1.3	B8A	9	
UCC84	(DT)	21.0	0.1		Other data as Type PCC84									
UCL83	(TP)	40.0	0.1	200	-1.5	2.4	34,000	2.5	2.3	0.32	1.6	B9A	27	
<i>Current Types</i>														
PC95		3.6	0.3	200	-1.2	10.0	8,000	10.5	3.1	0.24	0.38	B7G	—	
E88CC	(DT)	6.3	0.3	90	-1.0	15.0	—	12.5	3.3	1.18	1.4	B9A	39	
E90CC	(DT)	6.3	0.4	100	-2.1	8.5	4,500	6.0	3.4	0.35, 0.4	3.2, 3.5	B7G	17	
EA8C80	(TD)	6.3	0.45	250	-3.0	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2	
EAC91	}	(SD)	6.3	0.3	200	-3.2	7.5	12,800	2.8	1.7	0.4	1.6	B7G	23
M8097 (SQ)														
EBC81	(DD)	6.3	0.23	250	-3.0	1.0	58,000	1.2	2.3	2.3	1.2	B9A	54	
EBC91	(DD)	6.3	0.3	250	-2.0	1.2	62,500	1.6	—	—	—	B7G	19	
EC71	}	(DT)	6.3	0.15	100	-1.25	8.5	4,700	5.8	2.2	0.7	1.45	B8D†	16
M8718 (SQ)														
EC90		6.3	0.15	250	-8.5	10.5	7,700	2.2	1.8	1.3	1.6	B7G	15	
EC91		6.3	0.3	250	-1.5	10.0	12,000	8.5	5.3	0.2	3.8	B7G	24	
M8099 (SQ)	}	(DT)	6.3	0.3	100	-1.0	6.5	6,500	5.4	2.4	0.3	1.5	B8D†	15
ECC70														
6021 (SQ)		6.3	0.3	100	-1.0	6.5	6,500	5.4	2.4	0.3	1.5	B8D†	15	
ECC81	}	(DT)	6.3	0.3†	170	-1.0	8.5	11,000	5.9	2.3	0.2	1.6	B9A	1
M8162 (SQ)														
ECC82	(DT)	6.3	0.3†	250	-8.5	10.5	7,700	2.2	1.6	0.5	1.5	B9A	1	
M8136 (SQ)	}	(DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
ECC83														
M8137 (SQ)		6.3	0.34	90	-1.5	12.0	4,000	6.0	2.1, 2.3	0.16, 0.45	1.1, 2.3	B9A	28	
ECC84	(DT)	6.3	0.34	90	-1.5	12.0	4,000	6.0	2.1, 2.3	0.16, 0.45	1.1, 2.3	B9A	28	

(Continued)

Amplifier Triodes

Type	Heater		Volts		Anode Current (mA)	r_a (Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Grid				c_{pb}	c_{pk}	c_{pa}	Type	Ref.	
MULLARD (Continued)													
<i>Current Types (Continued)</i>													
ECC85	(DT)	6.3	0.435	250	-2.3	10.0	9,700	5.9	3.0	0.18	1.5	B9A	39
ECC88	(DT)	6.3	0.33	90	-1.2	15.0	2,650	12.5	3.3	1.8	1.4	B9A	39
ECC91	(DT)	6.3	0.45	100	-0.85	8.5	7,100	5.3	2.2	0.4	1.6	B7G	17
M8081 (SQ)													
ECL80	(TP)	6.3	0.3	100	-2.3	4.0	12,500	1.4	2.0	0.3	0.9	B9A	13
ECL82	(TP)	6.3	0.78	100	0	3.5	28,000	2.5	2.7	4.3	4.2	B9A	37
ECL83	(TP)	6.3	0.6	200	-1.5	2.5	34,000	2.5	2.3	0.32	1.6	B9A	27
PCC84	(DT)	7.0	0.3	90	-1.5	12.0	4,000	6.0	2.1, 2.3	0.16, 0.45	1.2, 2.3	B9A	28
PCC88	(DT)	7.0	0.3	90	-1.2	15.0	2,650	12.5	3.3	1.8	1.4	B9A	39
PCC89	(DT)	7.2	0.3	90	-1.2	15.0	2,900	12.3	3.8, 6.3	2.5, 0.2	1.9, 4.1	B9A	28
PCC85	(DT)	9.0	0.3										
PABC80	(DD)	9.5	0.3										
HBC91	(DD)	12.6	0.15	250	-2.0	1.2	62,500	1.6	—	—	—	B7G	19
PCL83	(TP)	12.6	0.3	250	-8.5	10.5	7,700	2.2	2.0	0.35	1.6	B9A	27
UBC81	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.3	2.3	1.2	B9A	54
PCL84	(TP)	15.0	0.3	200	-1.7	3.0	16,200	4.0	4.0	2.5	2.7	B9A	53
PCL82	(TP)	16.0	0.3	100	0	3.5	28,000	2.5	2.7	4.0	4.0	B9A	37
PCL85	(TP)	18.0	0.3	100	0	10.0	9,000	5.5	2.8	0.35	1.9	B9A	66
UCC85	(DT)	26.0	0.1	200	-2.1	10.0	8,300	5.8	0.003	0.18	1.5	B9A	39
UABC80	(DT)	28.0	0.1	200	-2.3	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2
UCL82	(TP)	50.0	0.1	100	0	3.5	28,000	2.5	2.7	4.3	4.2	B9A	37

Other data as UCC85
Other data as Type UABC80

† Flying leads.

TUNGSRAM

<i>Obsolete Types</i>													
DDT2	(DD)	2.0*	0.1	135	-3.0	1.0	21,000	1.4	2.0	7.7	2.8	B5	5
DDT2B	(DD)	2.0*	0.1	135	-4.5	2.5	16,000	1.0	—	—	—	{B5	5
DDT2BS													
HL2	(DD)	2.0*	0.13	135	-1.5	2.2	21,000	1.5	3.9	4.0	3.2	B4	1
HR2	(DD)	2.0*	0.065	135	-1.5	1.2	40,000	0.6	6.5	5.5	2.5	{B4	1
HR2S													
HR210	(DD)	2.0*	0.1	200	-1.5	1.0	23,000	1.3	—	—	4.0	B4	1
LL2	(DD)	2.0*	0.2	135	-2.5	3.0	11,500	2.6	—	—	—	{B4	1
LL2S													
LD210	(DD)	2.0*	0.1	150	-4.5	3.0	14,000	1.3	—	—	4.0	B4	1
2A6	(DD)	2.5	0.8	250	-1.35	0.4	91,000	1.1	1.7	3.8	1.7	UX6	4
HL4g	(DD)	4.0	0.65	250	-4.5	5.0	11,000	3.5	4.9	4.5	1.7	B7	6
6CS	(DD)	6.3	0.3	250	-8.0	8.0	10,000	2.0	4.4	12.0	2.2	IO	20
6R7	(DD)	6.3	0.3	250	-9.0	9.5	8,500	1.9	4.8	3.8	2.4	IO	29
EBC3	(DD)	6.3	0.2	250	-5.5	5.0	15,000	2.5	4.0	3.1	1.6	Ct8	7
HL13	(DD)	13.0	0.2	200	-3.0	6.0	11,000	3.5	4.9	5.5	1.7	B7	23
HL13S	(DD)	13.0	0.2	200	-3.0	6.0	11,000	3.5	4.9	5.5	1.7	Ct8	6
DDT13	(DD)	13.0	0.2	200	-5.0	4.0	11,000	3.6	4.3	3.1	1.7	{B7	7
DDT13S													
25SN7	(DD)	25.0	0.15									{Ct8	7
<i>Replacement Types</i>													
HL4+	(DD)	4.0	0.65	250	-4.5	5.0	11,000	3.5	4.9	4.5	3.5	B5	1
DDT4	(DD)	4.0	0.65	250	-5.0	4.0	11,000	3.6	4.3	3.1	1.7	B7	7
<i>Current Types</i>													
75	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	4.2	3.4	1.8	{UX6	4
6SQ7													
12AT7	(DT)	6.3	0.3†	170	-1.5	8.5	12,000	5.5	2.2	0.4, 0.5	1.5	IO	31
12AU7	(DT)	6.3	0.3†	250	-8.5	10.5	7,700	2.2	1.6	0.5	1.5	B9A	1
12AX7	(DT)	6.3	0.3†	250	-2.0	1.2	62,500	1.6	1.6	0.46	1.7	B9A	1
6AB8	(TP)	6.3	0.3	100	-2.3	4.0	12,500	1.4	2.0	0.3	0.9	B9A	13
6AK8	(TD)	6.3	0.45	250	-3.0	1.0	50,000	1.4	1.9	1.6	2.2	B9A	2
6AT6	(TP)	6.3	0.3	250	-3.0	1.0	58,000	1.2	2.3	1.1	2.1	B7G	19
6AV6	(TP)	6.3	0.3	250	-2.0	1.2	62,500	1.6	—	—	—	B7G	19
6CV7	(DD)	6.3	0.23	250	-3.0	1.0	54,000	1.3	2.75	1.5	1.3	B8A	9
6J5	(DD)	6.3	0.3	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	IO	20
6J6	(DT)	6.3	0.45	100	-0.85	8.5	7,100	5.3	2.2	0.4	1.6	B7G	17
6Q7	(DD)	6.3	0.3	250	-3.0	1.0	58,000	1.2	3.2	5.0	1.5	IO	29
6SL7GT	(DT)	6.3	0.3	250	-2.0	2.3	44,000	2.0	3.0	1.0, 1.3	2.5, 3.0	IO	26
6SN7	(DT)	6.3	0.6	250	-8.0	9.0	7,700	2.6	2.8	0.8	3.8	IO	26
EF37A	(P)	6.3	0.2	150	-3.0	6.0	10,000	2.8	—	—	—	IO	8
EAC91	(P)	6.3	0.3	200	-2.8	7.5	12,800	2.8	1.7	0.4	1.6	B7G	23
EBC33	(DD)	6.3	0.2	250	-5.5	5.0	15,000	2.5	4.0	3.1	1.6	IO	29
EBC81	(DD)	6.3	0.23	250	-3.0	1.0	58,000	1.2	—	—	—	B9A	54
ECC84	(DT)	6.3	0.335	90	-1.5	12.0	4,000	6.0	2.3	0.5	2.3	B9A	28

(Continued)

Type	Heater		Volts		Anode Current (mA)	r_a (Ω)	g_m (mA/V)	Capacitances (pF)			Base		
	Volts	Amps	Anode	Grid				c_{gt}	c_{at}	c_{ga}	Type	Ref.	
TUNGSRAM (Continued)													
<i>Current Types (Continued)</i>													
7FC7	(DT)	7.2	0.3	90	-1.2	15.0	3,000	12.0	4.0, 6.8	0.4, 0.2	1.7, 3.1	B9A	28
PCC88	(DT)	7.0	0.3	90	-1.2	15.0	2,650	12.5	—	—	—	B9A	39
7AN7	(DT)	7.0	0.3	90	-1.5	12.0	4,000	6.0	2.3	0.45	2.3, 1.1	B9A	28
12AT6		12.6	0.15	Other data as Type 6AT6									
12AV6		12.6	0.15	Other data as Type 6AV6									
12J5		12.6	0.15	Other data as Type 6J5									
12SN7	(DT)	12.6	0.3	Other data as Type 6SN7									
12SQ7	(DD)	12.6	0.15	Other data as Type 6SQ7									
14L7	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	2.75	1.5	1.3	B8A	9
UBC81	(DD)	14.0	0.1	170	-1.6	1.5	42,000	1.65	—	—	—	B9A	54
UCC84	(DT)	21.0	0.1	90	-1.5	12.0	4,000	6.0	2.3	0.45	2.37, 1.1	B9A	28
UCC85	(DT)	26.0	0.1	200	-2.1	10.0	8,300	5.8	0.003	0.008	0.008	B9A	39
UABC80	(TD)	28.0	0.1	200	-2.3	1.0	50,000	1.4	1.9	1.4	2.0	B9A	2

S.T.C.

Current Type
3A/167M

6.3	0.45	150	-1.5	40	1,000	47	11	2.5	4.0	B8B	56
-----	------	-----	------	----	-------	----	----	-----	-----	-----	----

AMERICAN

Current Types

1E4		1.4 ^a	0.05	0	-3.0	1.5	17,000	0.83	2.4	6.0	2.4	IO	81		
1G4		1.4 ^b	0.05	90	-6.0	2.3	10,700	0.83	2.2	3.4	2.8	IO	81		
1H5	}	(SD)	1.4 ^a	0.05	90	0	0.15	240,000	0.28	1.1	4.6	1.0	}	IO	91
1LH4															
1LE3		1.4 ^a	0.05	90	-3.0	1.3	19,000	0.76	1.7	3.0	1.7	B8B	36		
3A5	(DT)	1.4 ^a	0.22 [†]	90	-2.5	3.7	8,300	1.8	—	—	—	B7G	8		
3B7	(DT)	1.4 ^a	0.22 [†]	90	0	5.2	11,350	1.85	R.f. amplifier			B8B	34		
3C6	(DT)	1.4 ^a	0.11	90	0	4.5	11,200	1.3	—	—	—	B8B	35		
1B5L	}	(DD)	2.0 ^a	0.06	135	-3.0	0.8	35,000	0.58	1.6	1.9	3.4	}	IO	80
1H6															
1H4		2.0 ^a	0.06	180	-13.5	3.1	10,300	0.9	3.6	5.0	5.5	IO	81		
4A6	(DT)	2.0 ^a	0.12 [†]	90	-1.5	1.1	26,600	0.75	—	—	—	IO	95		
2A6	(DD)	2.5	0.8	250	-1.35	0.4	91,000	1.1	1.7	3.8	1.7	UX6	4		
2B6	(DT)	2.5	2.25	250	-24.0	40.0	5,150	3.5	—	—	—	UX7	4		
2C21	(DT)	6.3	0.6	250	-16.5	8.3	7,600	1.4	—	—	—	UX7	15		
2C22		6.3	0.3	300	-10.5	11.0	6,600	3.0	2.2	0.7	3.6	IO	107		
2C51	(DT)	6.3	0.3	150	-2.0	8.2	—	5.5	2.2	1.0	1.3	B9A	4		
6A6	}	(DT)	6.3	0.8	250	-5.0	3.0	22,600	1.55	—	—	—	}	IO	22
6N7															
6AB4		6.3	0.15	250	-2.0	10.0	10,000	5.5	2.2	0.5	1.5	B7G	45		
6AD5		6.3	0.3	250	-2.0	0.9	66,000	—	—	—	—	IO	20		
6AE5		6.3	0.3	95	-15.0	7.0	3,500	1.2	—	—	—	IO	20		
6AE6	(DT)	6.3	0.15	250	-1.5	6.5	25,000	1.0	—	—	—	IO	23		
6AE7	(DT)	6.3	0.5	250	-13.5	5.0	9,300	1.5	3.0	1.8	2.5	IO	24		
6AF5		6.3	0.3	180	-18.0	7.0	4,900	1.5	—	—	—	IO	20		
6AH6	}	(P)	6.3	0.45	150	—	12.5	3,600	11.0	10.0	2.0	0.03	}	B7G	16
7AC7															
6AH7		6.3	0.3	250	-9.0	12.0	6,600	2.4	2.2	3.0	2.2	IO	27		
6AQ6	(DD)	6.3	0.15	250	-3.0	1.0	58,000	1.2	—	—	—	B7G	19		
6AQ7	(DD)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.3	1.5	2.8	IO	32		
6AR7	(SD, R)	6.3	0.3	250	-2.0	1.3	66,500	1.05	1.4	1.0	2.0	IO	33		
6B6	(DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	1.7	3.8	1.7	IO	29		
6BF6	(DD)	6.3	0.3	250	-9.0	9.5	8,500	1.9	1.8	1.1	2.0	B7G	19		
6C7	(DD)	6.3	0.3	250	-9.0	4.5	16,000	1.25	—	—	—	UX7	9		
6C8	(DT)	6.3	0.3	250	0	3.2	22,500	1.6	2.6	2.0	2.5	IO	28		
6F4		6.3	0.23	80	—	13.0	2,900	5.8	2.0	0.6	1.9	—	—		
6F5	}	(DT)	6.3	0.3	250	-2.0	0.9	66,000	1.5	4.0	3.6	2.4	}	IO	18
6SF5															
7B4		6.3	0.3	250	-2.0	0.9	66,000	1.5	4.0	3.6	2.4	B8B	15		
6F8		6.3	0.6	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	IO	28		
6J4		6.3	0.4	100	—	10.0	5,000	11.0	5.5	0.24	4.0	B7G	30		
6J6	(DT)	6.3	0.45	100	-0.85	8.5	7,100	5.3	2.2	0.4	1.6	B7G	17		
6K4		6.3	0.15	200	—	11.5	4,650	3.45	2.4	0.8	2.4	Wires	—		
6K5		6.3	0.3	250	-3.0	1.1	50,000	1.4	2.4	3.6	2.0	IO	19		
6L4		6.3	0.225	80	—	9.5	4,400	6.4	1.8	0.5	1.6	—	—		
6L5		6.3	0.15	250	-9.0	8.0	9,000	1.9	3.0	5.0	2.7	IO	20		
6N4		6.3	0.2	180	-3.5	12.0	5,300	6.0	3.0	1.6	1.1	B7G	37		
6P5		6.3	0.3	250	-13.5	5.0	9,500	1.45	3.4	5.5	2.6	IO	20		

(Continued)

Amplifier Triodes

Type	Heater		Volts		Anode Current (mA)	r_a (Ω)	g_m (mA/V)	Capacitances (pF)			Base	
	Volts	Amps	Anode	Grid				c_{gk}	c_{at}	c_{ga}	Type	Ref.
AMERICAN (Continued)												
<i>Current Types (Continued)</i>												
6Q6 (SD)	6.3	0.15	250	-3.0	1.2	—	1.05	—	—	—	IO	30
6R7 } (DD)	6.3	0.3	250	-9.0	9.5	8,500	1.9	4.8	3.8	2.4	IO	29
7E6 } (DD)	6.3	0.3	250	-9.0	9.5	8,500	1.9	4.8	3.8	2.4	B8B	12
6S4 (DD, R)	6.3	0.6	250	-8.0	26.0	3,600	4.5	—	—	—	B9A	7
6S8 (DT)	6.3	0.3	250	-2.0	0.9	91,000	1.1	1.2	5.0	2.0	IO	34
6SC7 (DT)	6.3	0.3	250	-2.0	2.0	53,000	1.3	2.2	3.0	2.0	IO	25
6SR7 (DD)	6.3	0.3	250	-9.0	9.5	8,500	1.9	3.6	2.8	2.4	IO	31
6ST7 (DD)	6.3	0.15	250	-9.0	9.5	8,500	1.9	2.8	3.0	1.5	IO	31
6SU7 (DT)	6.3	0.3	250	-2.0	2.3	44,000	1.6	—	—	—	IO	26
6SZ7 (DD)	6.3	0.15	250	-3.0	1.0	58,000	1.2	2.6	2.8	1.1	IO	31
6T7 (DT)	6.3	0.15	250	-3.0	1.2	62,000	1.05	1.8	3.1	1.7	IO	29
6V7 (DD)	6.3	0.3	250	-20.0	8.0	7,500	1.1	1.5	4.3	1.5	IO	29
7A4 (DD)	6.3	0.3	250	-8.0	9.0	7,700	2.6	3.4	3.6	3.4	B8B	15
7AF7 (DT)	6.3	0.3	250	-10.0	9.0	7,600	2.1	2.2	1.6	2.3	B8B	14
7B6 (DD)	6.3	0.3	250	-2.0	0.9	91,000	1.1	3.0	2.4	1.6	B8B	2
7E5 (DD)	6.3	0.15	180	-3.0	5.5	12,000	—	3.6	2.8	1.5	B8B	—
7F7 (DT)	6.3	0.3	250	-2.0	2.3	44,000	1.6	2.4	2.0	1.6	B8B	14
7F8 (DT)	6.3	0.3	250	-2.5	10.0	10,400	5.0	2.8	1.4	1.2	B8B	20
7X7 (SD, R)	6.3	0.3	250	-1.0	1.9	67,000	1.5	—	—	—	B8B	22
12AY7 (DD)	6.3	0.3†	250	-4.0	3.0	—	1.75	1.3	0.6	1.3	B9A	1
12AH7 (SD)	12.6	0.15	180	-6.5	7.6	8,400	1.9	2.8	2.6	3.0	IO	27
12B6 (DD)	12.6	0.15	250	-2.0	0.9	91,000	1.1	—	—	—	IO	30
12BF6 (DD)	12.6	0.15	250	-9.0	9.5	8,500	1.9	1.8	1.1	2.0	B7G	19
12E5 (DD)	12.6	0.15	250	-13.5	—	—	1.45	3.4	5.5	2.6	IO	20
12F5 (DD)	12.6	0.15	250	Other data as Type 6F5			—	—	—	—	IO	29
12G7 (DD)	12.6	0.15	250	-3.0	—	58,000	1.2	—	—	—	IO	29
12S8 (DT)	12.6	0.15	—	Other data as Type 6S8			—	—	—	—	—	—
12SC7 (DT)	12.6	0.15	—	Other data as Type 6SC7			—	—	—	—	—	—
12SF5 (DD)	12.6	0.15	—	Other data as Type 6SF5			—	—	—	—	—	—
12SR7 (DD)	12.6	0.15	—	Other data as Type 6SR7			—	—	—	—	—	—
12SW7 (DD)	12.6	0.15	250	-9.0	9.5	8,500	1.9	3.0	2.8	2.4	IO	31
12SX7 (DT)	12.6	0.3	250	-8.0	9.0	7,700	2.6	3.0	0.8	3.6	IO	26
14A4 (DT)	12.6	0.15	250	Other data as Type 7A4			—	—	—	—	—	—
14AF7 (DT)	12.6	0.15	250	-10.0	9.0	7,600	2.1	2.2	1.6	2.3	B8B	14
14B6 (DD)	12.6	0.15	—	Other data as Type 7B6			—	—	—	—	—	—
14E6 (DD)	12.6	0.15	—	Other data as Type 7E6			—	—	—	—	—	—
14F7 (DT)	12.6	0.15	—	Other data as Type 7F7			—	—	—	—	—	—
14F8 (DT)	12.6	0.15	250	-2.5	10.0	10,400	5.0	2.8	1.4	1.2	B8B	20
19J6 (DT)	18.9	0.15	100	—	8.5	7,100	5.3	2.0	0.4	1.5	B7G	17
19T8 (DT)	19.0	0.15	—	Other data as Type 6T8			—	—	—	—	—	—
26C6 (DD)	26.5	0.07	250	-9.0	9.5	8,500	1.9	1.9	1.4	2.0	B7G	19

SMALL TRANSMITTING VALVES

(Up to 50W anode dissipation)

Type	Heater		Volts			Current (mA)			Drive (W)	Max. Diss. (W)	R.F. Output (W)	Frequency (Mc/s)		Base	
	Volts	Amps	Anode	Screen	Grid	Anode	Screen	Grid				Full Rating	Reduced Rating	Type	Ref.
BRIMAR															
<i>Obsolete Types</i>															
807 (BT)	6.3	0.9	600	250	-45	100	7.0	3.5	0.2	25.0	40	60	120	UX5	6
6J6 (DT)	6.3	0.45	150	—	-10	30	—	—	-0.35	3.0	3.5	80	250	B7G	17
<i>Current Types</i>															
5763 (BT)	6.0	0.75	300	250	-60	50	5.0	3.0	0.35	12.0	8	50	175	B9A	11
6062 (SQ) }	6.3	1.25	600	150	-58	112	9.0	2.8	0.2	20.0	52	60	175	IO	134
6146 (SQ) }	6.3	0.6†	250	250	-30	28.5	8.0	1.4	7.15	6.3	3.2	75	150	B9A	44
6870 (SQ) }	6.3	0.15	300	—	-27	25	—	7.0	0.35	5.0	5.5	70	150	B7G	15
6C4 (SQ) }	6.3	0.15	300	—	-27	25	—	7.0	0.35	5.0	5.5	70	150	B7G	15

COSSOR

Current Type

807 (BT)	6.3	0.9	600	250	-45	100	7.0	3.5	0.2	25.0	42.5	60	120	UX5	6
----------	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	----	-----	-----	---

Type	Heater		Volts			Current (mA)			Drive (W)	Max. Diss. (W)	R.F. Output (W)	Frequency (Mc/s)		Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen	Grid				Full Rating	Reduced Rating	Type	Ref.	
EMITRON																
<i>Current Types</i>																
807 (BT)	6.3	0.9	600	250	-45	100	7.0	3.5	0.2	25.0	40	60	125	UX5	6	
ENGLISH ELECTRIC																
<i>Current Types</i>																
3C24 (T)	6.3	3.0	1,000	—	-70	72	—	9.0	1.3	25.0	47	60	100	UX4	9	
4D32 (BT)	6.3	3.75	750	300	-100	250	34.0	12.0	1.5	50.0	140	60	—	B7A	—	
829B (DBT)	6.3	2.25†	500	230	-45	230	23.0	15.0	0.9	40.0	83	200	250	B7A	1	
832A (DBT)	6.3	1.6†	500	200	-65	72	14.0	2.6	0.18	15.0	26	200	250	B7A	1	
C178A/5894 (DBT)	6.3	1.8†	600	250	-80	200	18.0	7.0	3.0	40.0	90	150	500	B7A	1	
C1134 (DBT)	6.3	1.3†	600	250	-60	100	8.0	1.4	1.5	20.0	48	150	600	B7A	1	
G.E.C.																
<i>Obsolete Types</i>																
PT15 (BT)	6.0*	1.3	1,000	300	-70	80	23.0	6.0	0.7	30.0	60	20	60	B5	14	
DET19 (DT)	6.3	0.8	300	—	-50	80	—	15.0	2.0	5.0	15.9	50	250	UX7	12	
DET20 (T)	6.3	0.2	300	—	—	25	—	—	—	3.5	4.25	50	300	IO	107	
<i>Replacement Types</i>																
KT8 (BT)	6.3	1.27	600	300	-100	85	6.0	4.0	0.5	25.0	38	25	100	B5	2	
TT11 (BT)	6.3	0.8	250	160	-50	30	8.0	1.5	0.12	2.7	4.8	100	200	IO	113	
<i>Current Types</i>																
DET18 (T)	5.0	4.0	1,000	—	-87.5	100	—	35.0	6.0	35.0	70	100	150	UX4	20	
A2244 (T)	6.3	0.4	350	—	—	510	—	5.0	—	10.0	1.0Δ	3,000	—	Coaxial	—	
DET22 (T)	6.3	0.4	350	—	—	40	—	—	—	10.0	3	600	4,000	Coaxial	—	
DET24 (T)	6.3	1.0	400	—	—	120	—	—	—	20.0	14	500	2,600	Coaxial	—	
DET29 (T)	6.3	0.5	450	—	—	40	—	6.0	0.5	10.0	3φ	3	—	Coaxial	—	
TT15 (DBT)	6.3	1.6	300	175	-50	120	14	2.5	0.3	15.0	24	160	250	B9G	5	
TT20 (DT)	6.3	1.3†	500	250	-80	80	8	2.0	3.0	13.0	31	200	400	B7A	1	
TT21 (BT)	6.3	1.6	1,250	300	-115	175	20	6.0	1.9	45.0	102	30	—	IO	129	
DET28 (T)	7.7*	1.15	600	—	-60	100	—	6.0	1.0	25.0	35	20	—	B9G	12	
TT22 (BT)	12.6	0.8	1,250	300	-115	175	20	6.0	1.9	45.0	102	30	—	IO	129	
TT12 (BT)	19.0	0.42	600	275	-60	100	12	4.0	0.4	20.0	40	90	130	B9G	8	
φ 2,300 Mcs. Δ 1,600 Mcs.																
EDISWAN MAZDA																
<i>Current Types</i>																
S2P20	2.5	0.46†	150	150	-22	40	3.0	1.0	0.07	5.0	3.0	100	—	B9A	63	
11E13 (DBT)	6.3	0.83†	300	175	-40	76	3.0	3.0	0.5	10.0	14.0	225	—	B9A	29	
MULLARD																
<i>Obsolete Types</i>																
MZ05-20 (T)	6.0	3.0	600	—	-107	80	—	11.0	2.0	20.0	33.5	2	30	B4	1	
TZ05-20 (T)	6.0	3.1	600	—	-60	85	—	20.0	2.7	20.0	36	2	30	B4	1	
EC52 (T)	6.3	0.43	250	—	-2.6	10	—	—	—	7.0	—	300	400	B9G	3	
EC53 (T)	6.3	0.25	250	—	—	12.5	—	3.6	—	2.5	0.5	285	400	B3G	1	
PV06-25 (P)	6.3	1.3	600	300	-75	109	11.5	2.0	0.2	25.0	45	20	60	B7	39	
QQV04-20 (DBT)	6.3	1.6†	400	145	-45	150	17	4.5	0.23	20.0	44	125	200	IO	114	
TD05-12 (T)	6.3	0.75	150	—	—	10	—	1.5	1.5	0.02	12	1,300	—	—	—	
TY1-50 (T)	7.5	3.25	1,250	—	-225	90	—	15.0	4.5	50.0	75	20	330	B4	16	
PV1-35 (P)	12.0	0.9	1,000	300	-170	97	10	5.0	1.0	35.0	73	20	60	B7	39	
<i>Replacement Types</i>																
DL93 (P)	1.4*	0.2	150	135	—	18.3	6.5	0.13	—	2.0	1.2	50	—	B7G	7	
EC70 (T)	6.3	0.15	175	—	—	20	—	2.0	—	3.0	0.75	500	—	B8D	8	
QQV07-40 (DBT)	6.3	2.5†	750	200	-55	160	30	12.0	0.8	40.0	87	100	250	B7A	1	
QQZ04-15 (DBT)	6.3*	0.68	400	200	-80	60	8	3.0	—	12.0	14.5	186	—	B8B	50	
QV04-7 (BT)	6.3	0.6	300	250	-50	44	6	0.4	—	7.5	7.7	60	150	B9G	6	
M8157 (SQ) } (BT)	6.3	0.9	600	250	-45	100	7	3.5	0.2	25.0	40	60	75	UX5	6	
QV05-25 (BT)	6.3	0.9	600	250	-45	100	7	3.5	0.2	25.0	40	60	75	UX5	6	
<i>Current Types</i>																
DC70 (T)	1.25*	0.2	150	—	—	18.7	—	1.3	—	2.4	0.55	500	—	B8D	7	
DL70 (P)	1.25*	0.11	150	110	-22	10.5	2.5	0.06	—	1.0	0.45	200	—	B8D	6	
DL73 (P)	1.25*	0.2	150	75	-20	18.6	5.6	0.8	—	2.0	1.2	200	—	B8D	6	
QV03-12 (P)	6.0	0.75	300	250	-60	50	5.0	3.0	0.4	12.0	8.0	30	175	B9A	11	
M8096 (SQ) }	6.0	0.75	300	250	-60	50	5.0	3.0	0.4	12.0	8.0	30	175	B9A	11	

(Continued)

Small Transmitting Valves

Type	Heater		Volts			Current (mA)			Drive (W)	Max. Diss. (W)	R.F. Output (W)	Frequency (Mc/s)		Base		
	Volts	Amps	Anode	Screen	Grid	Anode	Screen	Grid				Full Rating	Reduced Rating	Type	Ref.	
MULLARD (Continued)																
<i>Current Types (Continued)</i>																
EC56 (T)	6.3	0.65	220	—	—	30	—	—	—	10.0	0.5	4,000	—	Disc seal		
EC57 (T)	6.3	0.65	220	—	—	60	—	—	—	10.0	1.8	4,000	—	Disc seal		
ECC91 (SQ) } M8081	(DT)	6.3	0.45	150	—	—10	30	—	16.0	0.35	3.0	3.5	80	250	B7G	17
EL85 (P)	6.3	0.2	300	175	—30	20.2	3.9	0.9	—	6.0	3.1	120	—	B9A	26	
QQV02-6 (DBT)	6.3	0.8†	180	180	—2.5	55	11.0	2.0	1.6	6.0	6.0	490	—	B9A	29	
QQV03-10 (DBT)	6.3	0.83†	300	175	—40	76	3.0	3.0	0.5	10.0	14.0	225	—	B9A	29	
QQV03-20A (DBT)	6.3	1.3†	600	250	—60	100	8.0	1.4	1.5	20.0	48.0	200	600	B7A	1	
QQV06-40A (DBT)	6.3	1.8†	600	250	—80	200	18.0	7.0	3.0	40.0	90.0	275	486	B7A	1	
QV06-20	6.3	1.25	600	150	—58	112	10.0	5.0	—	20.0	52.0	60	175	IO	134	
TD03-5	6.3	0.4	250	—	—2.0	10	—	—	0.6	5.0	—	2,000	—	Coaxial		
TD03-10 (T)	6.3	0.4	250	—	—3.5	20	—	—	10.0	10.0	3.0	1,000	3,000	Coaxial		
TD03-10F (T)	6.3	0.4	250	—	—3.5	20	—	—	—	10.0	3.0	1,000	3,000	Coaxial		
TD04-20	6.3	1.0	400	—	—	50	—	—	2.0	20.0	13.0	1,000	2,000	Coaxial		

S.T.C.															
<i>Obsolete Types</i>															
4061A (P)	6.3	0.8	500	200	—90	55	35.0	6.0	0.8	10.0	24.0	30	—	UX7	—
3A/154M (T)	6.3	0.43	250	—	—2	12	—	—	—	—	—	—	—	B8B	15
55A/165M (DP)	12.6	1.0	500	200	—80	125	20.0	1.0	—	16.0	47.5	30	60	B8B	38
<i>Replacement Types</i>															
3A/146J (T)	4.0	0.65	350	—	—	—	—	—	—	2.0	—	350	450	—	—
3A/147J (T)	4.0	0.7	350	—	—	28	—	—	—	6.0	1.5	750	850	—	—
4300A (T)	5.0	1.2	400	—	—89	50	—	—	—	40.0	—	—	—	UX4	1
3A/148J (T)	6.3	0.4	350	—	—	—	—	—	—	2.0	—	600	—	—	—
4074A (DT)	6.3	0.8	300	—	—50	90	—	17.0	1.0	10.0	15.0	100	300	UX7	12
4043C (T)	7.5	1.2	600	—	—170	130	—	—	—	35.0	52.0	2	10	UX4	1
5B/256M (BT)	19.0	0.3	600	250	—45	100	7.0	3.5	0.2	25.0	40.0	60	—	B8B	65
<i>Current Types</i>															
4033L (T)	6.0	1.4	600	—	—65	125	—	30.0	—	25.0	53.0	45	—	B5	1
33A/158M (DT)	6.3	0.8	300	—	—50	90	—	17.0	1.0	12.0	15.5	100	—	B8B	14
44A/160M (DBT)	6.3	1.6	350	200	—48	45	5.0	1.5	0.3	15.0	20.0	150	200	B9G	5
3B/240M (T)	6.3	1.1	300	—	—10	90	—	35.0	2.5	15.0	16.0	200	—	B8B	54
5B/254M (BT)	6.3	0.9	600	250	—45	100	8.0	4.0	0.3	25.0	40.0	60	—	B8B	66
5B/255M (BT)	6.3	0.9	600	250	—45	100	8.0	4.0	0.3	25.0	40.0	60	—	B8B	65
33B/152M (DT)	6.3	0.92	275	—	—8.5	100	—	13.0	2.0	16.0	13.5	300	420	B9G	10
4304CB (T)	7.5	3.2	1,000	—	—170	100	—	22.0	6.0	50.0	70.0	100	300	B4	16
5B/257M (BT)	12.0	0.47	600	250	—45	100	8.0	4.0	0.3	25.0	40.0	60	—	B8B	65
3B/241M (T)	19.0	0.37	300	—	—10	90	—	35.0	2.5	15.0	16.0	200	—	B8B	54

TUNGSRAM															
<i>Current Types</i>															
3A4 (P)	1.4*	0.2	150	135	—	18.3	6.5	0.13	—	2.0	1.2	50	—	B7G	7
807 (BT)	6.3	0.9	600	275	—90	100	6.5	4.0	0.4	25.0	42.5	60	125	UX5	6
6J6 (DT)	6.3	0.45	150	—	—10	30	—	16.0	0.35	3.0	3.5	80	250	B7G	17

VALVE RECTIFIERS

Type	Heater		Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Max. Reservoir Capacitance (μF)	Min. Series Resistance (Ω)	Base	
	Volts	Amps						Type	Ref.
BRIMAR									
<i>Obsolete Types</i>									
R1	4.0	1.0	F.W.	250-0-250	60	8	100	B4	14
R2	4.0	2.5	F.W.	350-0-350	120	16	30	B4	14
R3	4.0	2.5	F.W.	500-0-500	120	16	150	B4	14
83	5.0*	3.0	F.W.	450-0-450	225	—	50	UX4	3
5Z3	5.0*	3.0	F.W.	450-0-450	225	32	75	UX4	3
80s	5.0	2.0	F.W.	350-0-350	125	32	30	UX4	21
83V	5.0	2.0	F.W.	375-0-375	175	32	100	UX4	22
724	6.3	0.9	F.W.	325-0-325	100	32	75	B8B	1
R17 } 6157 (SQ) }	6.3	0.8	H.W.	500	75	32	50	B9A	30

Type	Heater		Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Max. Reservoir Capacitance (μ F)	Min. Series Resistance (Ω)	Base	
	Volts	Amps						Type	Ref.
BRIMAR (Continued)									
<i>Obsolete Types (Continued)</i>									
1D6	25.0	0.3	H.W.	250	100	16	50	UX6	14
25RE, 25Y5	25.0	0.3	F.W.	350-0-350	85	—	—	UX6	9
25Z4	25.0	0.3	H.W.	250	100	40	100	IO	111
35RE	35.0	0.3	F.W.	250-0-250	100	—	—	UX6	9
35Z3	35.0	0.15	H.W.	250	100	40	100	B8B	16
1D5	40.0	0.2	H.W.	250	100	16	50	B5	8
R14	52.0	0.3	2 \times H.W.	240	400	50	50	IO	52
<i>Replacement Types</i>									
0Z4	—	—	F.W.	300-0-300	75	—	—	IO	57
80	5.0*	2.0	F.W.	350-0-350	125	32	30	UX4	3
5U4	5.0*	3.0	F.W.	450-0-450	225	32	75	IO	60
5Y3	5.0	2.0	F.W.	350-0-350	125	32	30	IO	60
6X5	6.3	0.6	F.W.	325-0-325	70	32	150	IO	54
7Y4	6.3	0.5	F.W.	325-0-325	70	40	525	B8B	1
EZ40	6.3	0.6	F.W.	350-0-350	90	50	300	B8A	14
R18	6.3	1.1	H.W.	625	125	8	160	B9A	30
6443 (SQ)									
UY41	31.0	0.1	H.W.	250	100	50	210	B8A	1
35W4	35.0	0.15	H.W.	117	100	40	57	B7G	33
35Z4	35.0	0.15	H.W.	250	100	40	100	IO	55
<i>Current Types</i>									
5R4	5.0*	2.0	F.W.	750-0-750	250	4	250	IO	60
5V4	5.0	2.0	F.W.	375-0-375	175	32	100	IO	62
5Z4	5.0	2.0	F.W.	350-0-350	125	32	30	IO	62
6X4	6.3	0.6	F.W.	325-0-325	70	40	525	B7G	31
6063 (SQ)									
EZ80/6V4	6.3	0.6	F.W.	350-0-350	90	50	300	B9A	31
EZ81	6.3	1.0	F.W.	350-0-350	150	50	240	B9A	31
HY90	35.0	0.15	H.W.	250	110	100	100	B7G	33
UY85	38.0	0.1	H.W.	250	100	50	210	B9A	18

COSSOR

<i>Obsolete Types</i>									
4/100BU	4.0*	2.5	F.W.	500-0-500	200	16	75	B4	5
441U	4.0	2.5	F.W.	500-0-500	150	16	75	B4	5
442BU	4.0*	2.5	F.W.	350-0-350	120	16	100	B4	5
460BU	4.0*	2.5	F.W.	500-0-500	120	16	100	B4	5
506BU	4.0*	1.0	F.W.	250-0-250	60	16	100	B4	5
<i>Replacement Types</i>									
225DU	2.0	0.5	V.D.	750	25	2	2,000	B7	31
451U	4.0*	3.5	F.W.	500-0-500	250	16	75	B4	5
80	5.0*	2.0	F.W.	350-0-350	125	10	50	UX4	3
5U4	5.0*	3.0	F.W.	450-0-450	225	32	75	IO	60
5Z4	5.0	2.0	F.W.	350-0-350	125	32	50	IO	62
6X5	6.3	0.6	F.W.	325-0-325	70	8	50	IO	54
27SU	13.2*	0.9†	H.W.	250	250	60	15	IO	106
OM1	30.0	0.2	H.W.	250	120	32	50	IO	55
40SUA	40.0	0.2	H.W.	250	75	32	50	B5	8
<i>Current Types</i>									
431U	4.0	2.5	F.W.	500-0-500	150	16	75	B4	5
52KU	5.0	2.0	F.W.	500-0-500	150	16	75	IO	62
53KU	5.0	2.8	F.W.	500-0-500	250	16	75	IO	62
54KU	5.0	2.0	F.W.	{ 350-0-350 300-0-300 }	{ 250 300 }	32	100	IO	62
7Y4	6.3	0.5	F.W.	325-0-325	70	8	150	B8B	1
EZ40/66KU	6.3	0.6	F.W.	350-0-350	90	50	300	B8A	14
EZ80/6V4	6.3	0.6	F.W.	350-0-350	90	50	300	B9A	31
EZ81	6.3	1.0	F.W.	350-0-350	150	50	240	B9A	31
PY82/19Y3	19.0	0.3	H.W.	250	180	60	100	B9A	18
PY32	29.0	0.3	H.W.	250	275	100	56	IO	111
UY41/311SU	31.0	0.1	H.W.	250	90	50	160	B8A	5
35Z3	35.0	0.15	H.W.	250	100	16	100	B8B	16
UY85	38.0	0.1	H.W.	250	110	100	100	B9A	18

EDISWAN MAZDA

<i>Obsolete Types</i>									
UD41	4.0	1.15	V.D.	550	35	2	—	B7	33
UU4	4.0	2.2	F.W.	400-0-400	120	16	—	B4	14
UU10	4.0	2.3	F.W.	500-0-500	180	8	—	B4	14

(Continued)

Valve Rectifiers

Type	Heater		Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Max. Reservoir Capacitance (μ F)	Min. Series Resistance (Ω)	Base	
	Volts	Amps						Type	Ref.
EDISWAN MAZDA (Continued)									
<i>Replacement Types</i>									
UU5	4.0	2.3	F.W.	500-0-500	120	8	—	B4	14
UU6	4.0	1.4	F.W.	350-0-350	120	16	—	MO	8
UU7	4.0	2.3	F.W.	350-0-350	180	16	—	MO	8
UU8	4.0	2.8	F.W.	350-0-350	250	16	—	MO	8
UU9	6.3	0.58	F.W.	350-0-350	90	50	300	B8A	14
U201	20.0	0.2	H.W.	250	90	16	47	IO	55
U281	28.0	0.2	H.W.	250	120	16	47	IO	55
U403	40.0	0.2	H.W.	250	120	16	47	MO	18
U404	40.0	0.1	H.W.	250	90	50	180	B8A	1
U4020	40.0	0.2	H.W.	250	120	16	47	B5	8
U801	80.0	0.2	H.W.	250	300	80	47†	IO	117
<i>Current Types</i>									
ESU76	2.0*	7.5	H.W., M.V.	10,000 PIV	250	—	—	Edison Screw	
ESU103	2.5*	5.0	H.W., Xenon	5,000 PIV	500	—	—	UX4	9
ESU866	2.5*	5.0	H.W., M.V.	10,000 PIV	250	—	—	UX4	9
ESU866ES	2.5*	5.0	H.W., M.V.	10,000 PIV	250	—	—	Edison Screw	
19H1	4.0*	2.0	H.W.	5,300	75	0.5	2,500	B4	6
19H5	4.0	4.0	H.W.	6,500	125	2	1,600	Goliath Edison Screw	
ESU101	4.0*	2.7	H.W., M.V.	10,000 PIV	250	—	—	B4	6
UU12	6.3	1.0	F.W.	350-0-350	150	50	240	B9A	31
U192	19.0	0.3	H.W.	250	180	60	100	B9A	18
U291	29.0	0.3	H.W.	250	300	100	35	IO	111
U381	38.0	0.1	H.W.	250	110	100	100	B9A	18

† Each anode.

EMITRON

<i>Replacement Types</i>									
52KU	5.0	2.0	F.W.	500-0-500	150	16	75	IO	62
53KU	5.0	2.8	F.W.	500-0-500	250	16	75	IO	62
6X4	6.3	0.6	F.W.	325-0-325	70	10	520	B7G	31
7Y4	6.3	0.5	F.W.	325-0-325	70	40	150	B8B	1
27SU	13.2	0.9†	H.W.	250	250	64	15	IO	106
35Z3	35.0	0.15	H.W.	250	100	40	100	B8B	16

FERRANTI

<i>Obsolete Types</i>									
R4	4.0*	2.5	F.W.	350-0-350	120	32	120	B4	5
R4A	4.0*	2.5	F.W.	500-0-500	120	32	100	B4	5
R13A	13.0	0.3	H.W.	250-0-250	70	8	100	IO	54
RA	13.0	0.3	F.W.	250-0-250	50	8	100	B5	8
RZ	20.0	0.2	H.W.	250	75	16	100	B5	8
<i>Replacement Types</i>									
OZ4	—	—	F.W.	300-0-300	75	—	—	IO	57
R42	4.0	2.5	F.W.	350-0-350	120	16	100	B4	14
R43	4.0*	2.5	F.W.	500-0-500	120	16	100	B4	5
80	5.0*	2.0	F.W.	350-0-350	125	16	50	UX4	3
5U4	5.0*	3.0	F.W.	450-0-450	225	32	75	IO	60
5V4	5.0	2.0	F.W.	375-0-375	175	32	100	IO	62
5Y3	5.0*	2.0	F.W.	350-0-350	125	32	50	IO	60
5Z4	5.0	2.0	F.W.	350-0-350	125	32	50	IO	62
R52	5.0	2.0	F.W.	350-0-350	125	32	50	IO	62
6X5	6.3	0.6	F.W.	325-0-325	70	8	150	IO	54
7Y4	6.3	0.5	F.W.	325-0-325	70	32	150	B8B	1
7Z4	6.3	0.9	F.W.	325-0-325	100	32	75	B8B	1
EY91	6.3	0.42	H.W.	250	75	32	100	B7G	50
EZ40	6.3	0.6	F.W.	350-0-350	90	50	300	B8A	14
UY41	31.0	0.1	H.W.	250	100	50	210	B8A	1
35Z4	35.0	0.15	H.W.	250	100	40	100	IO	55
35Z5	35.0	0.15	H.W.	240	100	40	100	IO	51
PZ30	52.0	0.3	2 × H.W.	240	200	50	50	IO	52
<i>Current Types</i>									
HR6	4.0	1.25	H.W.	5,000	60	2	8,000	IO	22
5R4	5.0*	2.0	F.W.	{ 750-0-750 1,000-0-1,000	{ 250 150	{ 4 4	{ 250 575	IO	60
GZ32	5.0	2.3	F.W.	500-0-500	125	60	150	IO	62
EZ80/6V4	6.3	0.6	F.W.	350-0-350	90	50	300	B9A	31
EZ90/6X4	6.3	0.6	F.W.	325-0-325	70	8	150	B7G	31

(Continued)

Type	Heater		Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Max. Reservoir Capacitance (μ F)	Min. Series Resistance (Ω)	Base	
	Volts	Amps						Type	Ref.
FERRANTI (Continued)									
<i>Current Types (Continued)</i>									
PY82/19Y3	19.0	0.3	H.W.	250	180	60	45	B9A	18
UY85	38.0	0.1	H.W.	250	110	100	100	B9A	18
G.E.C.									
<i>Obsolete Types</i>									
GU1	4.0*	3.0	H.W., M.V.	1,000	250	—	—	B4	4
GU5	4.0*	3.0	H.W., M.V.	1,500	250	—	—	B4	6
MU12	4.0	2.5	F.W.	350-0-350	120	—	—	B4	5
U12	4.0*	2.5	F.W.	350-0-350	120	4	—	B4	5
U17	4.0*	1.0	H.W.	2,500	30	1	2,000	B4	6
U30	26.0	0.3	F.W.	250-0-250	120	—	—	B7	12
U118	40.0	0.1	H.W.	250	90	40	180	B8A	1
<i>Replacement Types</i>									
MU14	4.0	2.5	F.W.	500-0-500	120	32	100	B4	5
U10	4.0*	1.0	F.W.	250-0-250	100	—	—	B4	5
U14	4.0*	2.5	F.W.	500-0-500	120	32	100	B4	5
U18/20	4.0*	2.8	F.W.	500-0-500	275	16	180	B4	5
U19	4.0	3.3	H.W.	2,500	250	4	600	B4	6
U84	4.0*	1.0	F.W.	250-0-250	75	16	100	B8B	24
U50	5.0*	2.0	F.W.	350-0-350	120	32	100	IO	60
U52	5.0*	2.25	F.W.	500-0-500	250	16	180	IO	60
U54	5.0	2.8	F.W.	500-0-500	250	16	75	IO	62
EZ35	6.3	0.6	F.W.	325-0-325	70	16	250	IO	54
EZ81/U705	6.3	1.0	F.W.	350-0-350	150	8	270	B9A	31
EZ90/U78	6.3	0.6	F.W.	325-0-325	70	16	435	B7G	31
U81	6.3	1.6	F.W.	500-0-500	150	16	100	B8B	24
U82	6.3	0.6	F.W.	325-0-325	75	4	150	B8B	1
PY81	17.0	0.3	—	450	150	4,500	—	B9A	34
PY80/U309	19.0	0.3	—	400	180	650	160	B9A	18
PY82/U319	19.0	0.3	H.W.	250	170	—	55	B9A	18
U31	26.0	0.3	H.W.	250	120	32	100	IO	55
U76	30.0	0.16	H.W.	250	100	32	100	IO	55
PY32	29.0	0.3	H.W.	250	275	100	56	IO	111
U107	40.0	0.1	H.W.	250	90	12	200	B7G	13
U101	50.0	0.1	H.W.	250	100	32	100	B8B	25
<i>Current Types</i>									
GU12	2.5	5.6	H.W., M.V.	3,500	250	—	—	UX4	8
GXU1	2.5	5.0	H.W., Xenon	3,500	250	—	—	UX4	8
GXU5	2.5	30	H.W., Xenon	3,500	3,000	—	—	Special	—
GU50	4.0*	3.0	H.W., M.V.	1,750	250	4	—	B4	6
GXU50	4.0	3.0	H.W., Xenon	1,800	250	—	—	B4	5
GXU2	5.0	7.0	H.W., Xenon	4,500	1,250	—	—	B4F	1
GXU52	5.0	2.3	F.W., Xenon	450	250	—	—	B8B	—
A2272	6.3	1.6	H.W.	5,000	100	—	4,000	B8B	—
CV4044	6.3	1.15	H.W.	625	125	—	—	B9A	30
U718	6.3	0.63	F.W.	350-0-350	90	50	300	B8A	14
UY85/U119	38.0	0.1	H.W.	250	110	100	100	B9A	18
HIVAC									
<i>Obsolete Types</i>									
UU60/250	4.0	1.25	F.W.	300-0-300	75	—	—	B4	5
UU120/350A	4.0	2.5	F.W.	350-0-350	120	—	—	B4	5
UU120/500	4.0	2.5	F.W.	500-0-500	120	—	—	B4	5
MARCONI									
<i>Obsolete Types</i>									
GU1	4.0*	3.0	H.W., M.V.	1,000	250	—	—	B4	4
GU5	4.0*	3.0	H.W., M.V.	1,500	250	—	—	B4	6
GU50	4.0*	3.0	H.W., M.V.	1,750	250	4	—	B4	6
U12	4.0*	2.5	F.W.	350-0-350	120	—	—	B4	5
U14	4.0	2.5	F.W.	500-0-500	120	—	—	B4	5
U84	4.0*	1.0	F.W.	250-0-250	75	16	100	B8B	24
U81	6.3	1.6	F.W.	500-0-500	150	16	100	B8B	24

(Continued)

Valve Rectifiers

Type	Heater		Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Max. Reservoir Capacitance (μ F)	Min. Series Resistance (Ω)	Base	
	Volts	Amps						Type	Ref.
MARCONI (Continued)									
<i>Obsolete Types (Continued)</i>									
U82	6.3	0.6	F.W.	325-0-325	75	4	150	B8B	1
U154	9.0	0.3	H.W.	250	180	60	100	B9A	18
U30	26.0	0.3	F.W.	250-0-250	120	—	—	B7	12
U107	40.0	0.1	H.W.	250	90	12	200	B7G	13
U101	50.0	0.1	H.W.	250	100	32	100	B8B	25
<i>Replacement Types</i>									
MU14	4.0	2.5	F.W.	500-0-500	120	32	100	B4	5
U10	4.0*	1.0	F.W.	250-0-250	60	—	—	B4	5
U14	4.0*	2.0	F.W.	500-0-500	120	32	100	B4	5
U18/20	4.0*	3.0	F.W.	500-0-500	250	16	180	B4	5
U76	30.0	0.16	H.W.	250	100	32	100	IO	55
<i>Current Types</i>									
AZ31/U143	4.0*	1.1	F.W.	300-0-300	100	16	100	IO	60
U50	5.0*	2.0	F.W.	350-0-350	125	32	100	IO	60
U52	5.0*	3.0	F.W.	450-0-450	225	16	180	IO	60
EZ35/U147	6.3	0.6	F.W.	325-0-325	70	16	350	IO	54
EZ40/U150	6.3	0.6	F.W.	350-0-350	90	50	300	B8A	20
EZ80	6.3	0.6	F.W.	350-0-350	90	50	300	B9A	31
EZ81/U709	6.3	1.0	F.W.	350-0-350	150	—	270	B9A	31
U70	6.3	0.6	F.W.	325-0-325	70	16	350	IO	54
U78/6X4	6.3	0.6	F.W.	325-0-325	70	8	435	B7G	31
U149/7Y4	6.3	0.5	F.W.	325-0-325	70	40	—	B8B	1
PY82/U319	19.0	0.3	H.W.	250	21	—	55	B9A	18
U31	26.0	0.3	H.W.	250	120	32	100	IO	55
PY32	29.0	0.3	H.W.	250	300	100	56	IO	111
UY41/U142	31.0	0.1	H.W.	250	100	50	210	B8A	22
35W4	35.0	0.15	H.W.	250	100	40	120	B7G	33
UY85	38.0	0.1	H.W.	250	110	100	100	B9A	18
U145	40.0	0.1	H.W.	250	90	16	50	B8A	5

MULLARD

<i>Obsolete Types</i>									
AX50	4.0*	3.75	F.W.	500-0-500	250	16	100	B4	5
DW2	4.0*	1.0	F.W.	250-0-250	60	16	—	B4	5
6X5	6.3	0.6	F.W.	325-0-325	70	4	150	IO	54
CY32	30.0	0.2	2 \times H.W.	250	120	32	125	IO	53
UR3C	30.0	0.2	2 \times H.W.	250	120	32	125	B7	29
UY21	50.0	0.1	H.W.	250	140	60	175	B8B	4
UY31	50.0	0.1	H.W.	250	125	60	175	IO	55
<i>Replacement Types</i>									
AZ31	4.0*	1.1	F.W.	500-0-500	60	60	—	IO	60
DW4-350	4.0*	2.0	F.W.	350-0-350	120	16	0	B4	5
DW4-500	4.0*	2.0	F.W.	500-0-500	120	16	200	B4	5
FW4-500	4.0*	3.0	F.W.	500-0-500	250	16	200	B4	5
FW4-800	4.0*	3.0	F.W.	850-0-850	125	4	150	B4	5
IW4-350	4.0	2.0	F.W.	350-0-350	120	12	—	B4	14
IW4-500	4.0	2.5	F.W.	500-0-500	120	16	150	B4	14
80	5.0*	2.0	F.W.	350-0-350	125	—	50	UX4	3
5U4	5.0*	3.0	F.W.	450-0-450	225	—	75	IO	60
5V4	5.0	2.0	F.W.	375-0-375	175	—	100	IO	62
5Y3	5.0*	2.0	F.W.	350-0-350	125	—	—	IO	60
5Z4	5.0	2.0	F.W.	350-0-350	125	—	50	IO	62
GZ30	5.0	2.0	F.W.	350-0-350	125	50	380	IO	62
EY70	6.3	0.45	H.W.	235	45	20	270	B8D	11
EY91	6.3	0.42	H.W.	250	75	32	100	B7G	50
EZ41	6.3	0.4	F.W.	250-0-250	60	50	325	B8A	14
EZ35	6.3	0.6	F.W.	325-0-325	70	16	350	IO	54
EZ40	6.3	0.6	F.W.	350-0-350	90	50	300	B8A	14
PY31	17.0	0.3	H.W.	250	125	60	175	IO	55
CY31	20.0	0.2	H.W.	250	120	32	125	IO	55
UR1C	20.0	0.2	H.W.	250	120	32	125	B5	8
25Z4	25.0	0.3	H.W.	250	100	—	—	IO	111
UY41	31.0	0.1	H.W.	250	100	50	210	B8A	1
35Z5	35.0	0.15	H.W.	235	100	40	100	IO	51
UY1N	50.0	0.1	H.W.	250	140	60	175	IO	122
PZ30	52.0	0.3	2 \times H.W.	240	200	50	50	IO	52
<i>Current Types</i>									
RG3-250	2.5*	5.0	H.W.	3,500	250	2	—	Edison Screw	
RG3-250A	2.5*	5.0	H.W.	3,500	250	2	—	B4D	1

(Continued)

Type	Heater		Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Max. Reservoir Capacitance (μ F)	Min. Series Resistance (Ω)	Base	
	Volts	Amps						Type	Ref.
MULLARD (Continued)									
<i>Current Types (Continued)</i>									
RR3-250	2.5*	5.0	H.W.	1,700	500	—	—	B4D	1
RG3-1250	4.0*	7.0	H.W.	8,000 PIV	1,250	—	—	Edison Screw	
RG1-240A	4.0*	2.7	H.W.	2,220	250	5	—	B4	6
AZ41	4.0*	0.72	F.W.	300-0-300	70	50	100	B8A	26
GZ32	5.0	2.3	F.W.	500-0-500	125	60	150	IO	62
GZ33	5.0	3.0	F.W.	500-0-500	250	60	250	IO	62
GZ34	5.0	1.9	F.W.	550-0-550	160	60	175	IO	62
GZ37	5.0	2.8	F.W.	500-0-500	250	—	—	IO	62
EY81	6.3	0.8	H.W.	4,500 PIV	150	4	—	B9A	34
EY84	6.3	1.0	H.W.	625	125	24	250	B9A	30
EZ80	6.3	0.6	F.W.	350-0-350	90	50	300	B9A	31
EZ81	6.3	1.0	F.W.	350-0-350	150	50	230	B9A	31
EZ90	6.3	0.6	F.W.	325-0-325	70	16	520	B7G	31
PY82	19.0	0.3	H.W.	200	180	60	30	B9A	18
PY32	29.0	0.3	H.W.	200	325	100	23	IO	111
HY90	35.0	0.15	H.W.	117	100	40	120	B7G	33
UY85	38.0	0.1	H.W.	250	110	100	100	B9A	18
S.T.C.									
<i>Replacement Type</i>									
4274A (DD)	5.0	2.0	F.W.	1,000	175	4	230	UX4	3
<i>Current Types</i>									
866A	2.5	5.0	H.W.	10,000 PIV	250	—	—	UX4	9
3B28	2.5	5.0	H.W.	10,000 PIV	250	—	—	UX4	9
705A	5.0	5.0	H.W.	30,000 PIV	200	—	—	B4A	1
TUNGSRAM									
<i>Obsolete Types</i>									
RG250/3000	2.5*	5.0	H.W.	3,000	250	—	—	UX4	6
RG250/1000	4.0*	3.0	H.W.	1,000	250	4	—	B4	6
RV120/350	4.0*	2.0	F.W.	350-0-350	120	—	—	B4	5
5X4	5.0*	3.0	F.W.	500-0-500	250	—	—	IO	61
5Z3	5.0*	3.0	F.W.	450-0-450	225	—	75	UX4	3
6Z4 } 84 }	6.3	0.5	F.W.	350-0-350	60	—	—	UX5	5
EZ3	6.3	0.65	F.W.	400-0-400	100	—	—	C18	14
EZ4	6.3	0.9	F.W.	400-0-400	175	—	—	C18	14
PVB6	6.3	0.6	F.W.	400-0-400	100	—	—	B5	3
V2118	20.0	0.18	H.W.	250	80	—	—	B5	9
25Y5	25.0	0.3	2 \times H.W.	235	75	—	—	UX6	9
PV25	25.0	0.3	2 \times H.W.	250	120	—	—	B7	29
PV29	30.0	0.2	2 \times H.W.	125	120	—	100	B7	29
PV30	30.0	0.2	2 \times H.W.	275	60	—	—	B7	29
50Y6	50.0	0.15	2 \times H.W.	117	75	16	30	IO	53
<i>Replacement Type</i>									
V30	30.0	0.2	H.W.	275	120	—	50	B5	1
<i>Current Types</i>									
APV4	4.0*	2.0	F.W.	400-0-400	120	—	—	B4	14
AZ31	4.0	1.1	F.W.	300-0-300	100	60	—	IO	60
RV200/600	4.0*	2.8	F.W.	600-0-600	200	—	—	B4	5
RV120/500	4.0*	2.0	F.W.	500-0-500	120	—	—	B4	5
80	5.0*	2.0	F.W.	350-0-350	125	—	50	UX4	3
5U4	5.0*	3.0	F.W.	450-0-450	225	—	75	IO	60
5V4G	5.0	2.0	F.W.	375-0-375	175	—	100	IO	62
5Y3	5.0*	2.0	F.W.	350-0-350	125	—	—	IO	60
5Z4	5.0	2.0	F.W.	350-0-350	125	—	50	IO	62
GZ32	5.0	2.3	F.W.	500-0-500	125	60	150	IO	62
GZ33	5.0	2.8	F.W.	500-0-500	250	16	75	IO	62
GZ34	5.0	1.9	F.W.	550-0-550	160	60	175	IO	62
6BT4	6.3	0.6	F.W.	350-0-350	90	50	300	B8A	14
6V4	6.3	0.6	F.W.	350-0-350	90	50	300	B9A	31
6X4	6.3	0.6	F.W.	325-0-325	70	—	150	B7G	31
6X5	6.3	0.6	F.W.	325-0-325	70	4	150	IO	54
For-pulsed input $PIV_{max} = 22kV$.									
EZ41	6.3	0.4	F.W.	250-0-250	60	50	325	B8A	14
EZ81	6.3	1.0	F.W.	350-0-350	150	50	240	B9A	31
EZ35	6.3	0.6	F.W.	325-0-325	70	16	350	IO	54
PY31	17.0	0.3	H.W.	250	125	60	175	IO	55
$PIV = 4.5kV$ max. $I_{a(pk)} = 450mA$ max. $V_{hb(pk)} = 4.5kV$ max. $PIV = 4.0kV$ max. $I_{a(pk)} = 180mA$ max. $V_{hb(pk)} = 650V$ max.									
19X3	19.0	0.3						B9A	18

(Continued)

Valve Rectifiers

Type	Heater		Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Max. Reservoir Capacitance (μ F)	Min. Series Resistance (Ω)	Base	
	Volts	Amps						Type	Ref.
TUNGSRAM (Continued)									
<i>Current Types (Continued)</i>									
19Y3	19.0	0.3	H.W.	250	180	60	100	B9A	18
CY1	20.0	0.2	H.W.	250	75	32	125	Ct8	5
CY31	20.0	0.2	H.W.	250	120	32	125	IO	55
V20	20.0	0.2	H.W.	250	120	32	125	B5	8
25Z4	25.0	0.3	H.W.	250	100	16	100	IO	55
25Z5	25.0	0.3	2 \times H.W.	235	150	16	100	UX6	9
25Z6									111
PY32	29.0	0.3	H.W.	250	275	100	56	IO	111
31A3	31.0	0.1	H.W.	250	100	50	210	B8A	1
35W4	35.0	0.15	H.W.	117	100	—	15	B7G	33
35Z4	35.0	0.15	H.W.	235	100	—	100	IO	55
35Z5	35.0	0.15	H.W.	235	100	40	100	IO	51
UY85	38.0	0.1	H.W.	250	110	100	100	B9A	18
PZ30	52.0	0.3	2 \times H.W.	240	200	50	50	IO	52

AMERICAN

<i>Current Types</i>									
OZ4	—	—	F.W.	300-300	75	—	—	IO	57
OY4	—	—	H.W.	95	75	—	—	IO	61
1B48	—	—	H.W.	350	50	—	—	—	—
1V2	0.625*	0.3	H.W.	—	0.3	—	—	B9A	5
2W3	2.5*	1.5	H.W.	350	55	—	—	IO	59
2Z2	2.5*	1.5	H.W.	350	50	—	—	UX4	4
3B25	2.5*	5.0	H.W.	PIV=4.5kV 3,000	500	—	—	UX4	9
3B27	2.5	5.0	H.W.		250	—	—	UX4	4
3B24	5.0*	3.0	H.W.	—	60	—	—	UX4	13
5AZ4	5.0*	2.0	F.W.	500	125	—	—	IO	60
5T4	5.0*	3.0	F.W.	450-450	225	—	150	IO	60
5V4	5.0	2.0	F.W.	375-375	175	—	100	IO	62
5W4	5.0*	1.5	F.W.	350-350	100	4	50	IO	60
5Y4	5.0*	2.0	F.W.	350-350	125	—	—	IO	61
6AX5	6.3	1.2	F.W.	450	40	—	—	IO	54
6W4	6.3	1.2	H.W.	—	125	—	—	IO	109
6W5	6.3	0.9	F.W.	350-350	100	—	—	IO	54
6Y5	6.3	0.8	F.W.	350-350	50	—	—	UX6	12
6Z3	6.3	0.3	H.W.	350	50	—	—	UX4	3
6Z5	6.3	0.8	F.W.	230-230	60	—	—	UX6	13
6ZY5	6.3	0.3	F.W.	325-325	40	—	25	IO	54
12Y4	12.6	0.3	F.W.	325	70	—	—	B8B	1
12Z3	12.6	0.3	H.W.	250	60	—	—	UX4	5
12Z5	12.6	0.3	H.W.	225	60	—	—	UX7	10
14Z3	12.6	0.3	H.W.	250	60	—	—	UX4	5
25W4	25.0	0.3	H.W.	350	125	—	—	IO	109
25X6	25.0	0.15	V.D.	125	60	—	—	IO	53
25Y4	25.0	0.15	H.W.	250	75	—	—	IO	55
25Z3	25.0	0.3	H.W.	250	50	—	—	UX4	5
28Z5	28.5	0.24	F.W.	325	100	—	—	B8B	1
35Y4	35.0	0.15	H.W.	235	100	—	—	IO	50
35Z6	35.0	0.3	V.D.	125	110	—	—	IO	53
40Z5	40.0	0.15	H.W.	125	100	—	—	IO	51
45Z3	45.0	0.075	H.W.	117	65	—	15	B7G	20
45Z5	45.0	0.15	H.W.	235	60	—	100	IO	51
50X6	50.0	0.15	V.D.	117	75	—	—	B8B	11
50Y7	50.0	0.15	F.W.	117	65	—	—	B8B	49
50Z6	50.0	0.3	V.D.	125	130	—	—	IO	53
50Z7	50.0	0.15	V.D.	117	65	—	15	IO	52
117Z3	117.0	0.04	H.W.	117	90	—	15	B7G	35
117Z4	117.0	0.04	H.W.	117	90	—	—	IO	55
117Z6	117.0	0.075	2 \times H.W.	235	120	40	100	IO	53

METAL RECTIFIERS

Type	Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Reservoir Capacitance (μ F)	Rectified Volts
BRIMAR					
<i>Replacement Types</i>					
D3/2/1Y	H.W.	136* per arm	1.0 per arm	—	112** per arm
K3/15	H.W.	360	1.0	—	840**
K3/25	H.W.	600	1.0	—	1,400**
K3/40	H.W.	960	1.0	—	2,240**
K3/45	H.W.	1,080	1.0	—	2,520**
K3/50	H.W.	1,200	1.0	—	2,800**
K3/100	H.W.	2,400	1.0	—	5,600**
Q1/1	H.W.	68*	0.25	—	56**
Q1/2	H.W.	136*	0.25	—	112**
Q1/5	H.W.	340*	0.25	—	280*
Q3/3	H.W.	204*	1.0	—	168**
Q3/4	H.W.	272*	1.0	—	224**
Q3/5	H.W.	340*	1.0	—	280**
Q6/1	H.W.	68*	3.5	—	56**
Q6/5	H.W.	340*	3.5	—	280**
RM4B	H.W.	250	250	32	268
SB2	H.W.	125	40	32	125
SB3	H.W.	250	60	32	220
V3/1/1Y	H.W.	68* per arm	1.0 per arm	—	56** per arm
V3/2/1Y	H.W.	136* per arm	1.0 per arm	—	112** per arm
<i>Current Types</i>					
C2H†	H.W.	125	60	16	115
C3H†	H.W.	125	120	16	85
C2D†	H.W.	250	60	16	245
C2D†	V.D.	125	60	16	245
C3D†	H.W.	250	120	16	245
C3D†	V.D.	125	120	16	205
C2V†	F.W.	125-0-125	120	16	120
C3V†	F.W.	125-0-125	240	16	115
C3B†	Bridge	250	120	16	250
DRM1B	H.W.	250	60	16	280
DRM2B	H.W.	250	100	16	260
DRM3B	H.W.	250	120	16	285
RM0	H.W.	125	30	8	130
RM1	H.W.	125	60	16	140
RM1A	H.W.	125	100	16	150
RM2	H.W.	125	100	32	130
RM3	H.W.	125	120	16	140
RM4	H.W.	250	2.0	32	268
RM5	H.W.	250	300	32	255
* Peak inverse volts. ** Max. instantaneous reverse d.c. volts. † Contact-cooled types.					
G.E.C.					
<i>Replacement Types</i>					
13H18XF	H.W.	250	500	100	250
13H21SF	H.W.	250	500	100	250
313H15XF	H.W.	250	500	100	250
96497	H.W.	250	300	100	280
	V.D.	125	300	120	270
9749730†	H.W.	250	60	16	290
AR2	H.W.	250	300	100	290
KB4	H.W.	250	275	64	290
KB5	H.W.	250	300	100	290
MR4A	H.W.	250	300	100	290
P46H1X and intermediate types to P46H9X	H.W.	16	5.0	8.0	16
P46H9X	H.W.	144	5.0	1.0	144
PR1	H.W.	250	275	64	290
Z11H8X	H.W.	125	80	20	130
Z11H16X	H.W.	250	80	20	290

Continued

Metal Rectifiers

Type	Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Reservoir Capacitance (μ F)	Rectified Volts
------	-----------------------	----------------------	-------------------------	---------------------------------------	-----------------

G.E.C. (Continued)

Replacement Types (Continued)

Z12H8X	H.W.	125	190	48	130
Z12H14XF	H.W.	200	350	100	200
Z12H16X	H.W.	250	190	48	290
Z13H8X	H.W.	125	375	100	130
Z13H16X	H.W.	250	375	100	290
Z21H8X	H.W.	125	125	32	130
Z21H16X	H.W.	250	125	32	290
Z22H8X	H.W.	125	275	64	130
Z22H9X	H.W.	125	300	64	130
Z22H16X	H.W.	250	275	64	290
Z46H10X and intermediate types to Z46H440X	H.W.	160	5.0	0.8	160
Z48H10X and intermediate types to Z48H440X	H.W.	7,040	5.0	0.02	7,040
Z48H10X and intermediate types to Z48H440X	H.W.	160	12.0	2.0	160
Z48H10X and intermediate types to Z48H440X	H.W.	7,040	12.0	0.045	7,040
ZC12H16XFE	H.W.	240	200	48	270
ZC12H17XFE	H.W.	250	200	48	280
ZC13D8XE	V.D.	120	300	64	270
ZC13D9XE	V.D.	125	300	100	280
ZC13H16XE	H.W.	240	300	64	270
ZC13H16XF	H.W.	250	500	100	250
ZC22D9X	H.W.	250	300	100	290
ZE22H16X†	H.W.	250	275	64	290
ZE22H18X†	H.W.	250	300	100	290

Note: Equivalents to some of the above replacement types may be found in the Index and Equivalents section.

Current Types

46H1 and intermediate types to 46H33	H.W.	28	5	4.5	28
46H33	H.W.	6,120	5	0.02	6,120
48H1 and intermediate types to 48H33	H.W.	28	12	10	28
48H33	H.W.	6,120	12	0.05	6,120
RR0	H.W.	125	30	16	140
RR1	H.W.	125	60	16	130
RR2	H.W.	125	100	32	135
RR3	H.W.	125	120	32	130
SE14	H.W.	250	275	32	275
SE15	H.W.	250	325	32	275
SE17	H.W.	250	300	100	290
SE19	H.W.	250	300	100	290
SE110	H.W.	250	280	100	290
SE111	H.W.	250	300	100	290
SE112	H.W.	250	300	100	290
SE160	H.W.	250	300	100	290
SE161	H.W.	250	300	100	290
Z11B1X	Bridge	27	150	—	21.5
Z11H9X	H.W.	125	90	20	130
Z11H17X	H.W.	250	90	20	290
Z12B1X	Bridge	27	360	—	21.5
Z12H9X	H.W.	125	225	48	130
Z12H17X	H.W.	250	225	48	290
Z13B1X	Bridge	27	720	—	21.5
Z13H9X	H.W.	125	450	100	290
Z13H17X	H.W.	250	450	100	290
Z21B1X	Bridge	27	240	—	21.5
Z21H9X	H.W.	125	150	32	130
Z21H17X	H.W.	250	125	32	290
Z22B1X	Bridge	27	520	—	21.5
Z22H17X	H.W.	250	300	64	290

(Continued)

Metal Rectifiers

Type	Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Reservoir Capacitance (μ F)	Rectified Volts
------	-----------------------	----------------------	-------------------------	---------------------------------------	-----------------

G.E.C. (Continued)

Current Types (Continued)

ZC12H18X	H.W.	250	325	100	290
ZC13H17XE	H.W.	250	300	100	280

† Printed-circuit types.

Note: Rectified voltage may be considerably reduced by any series dropping resistance in the circuit.

S.T.C.

Obsolete Types

DRM1B	H.W.	250	60	8	250
DRM2B	H.W.	250	100	16	250
DRM3B	H.W.	250	120	16	260
RM1	H.W.	125	60	16	130
RM2	H.W.	125	100	32	125
RM3	H.W.	125	120	16	100

Note: Equivalents to the above obsolete types will be found in the Index and Equivalents section of this book.

Current Types

B18-14-1RW	Bridge	220	60	4	25
B25-14-1RW	Bridge	220	100	4	250
B18-1-1RW	Bridge	18	60	—	14
B25-1-1W	Bridge	18	150	—	14
B45-1-1W	Bridge	18	600	—	14
C2H	H.W.	125	60	16	115
C3H	H.W.	125	120	16	85
C2D	H.W.	250	60	16	245
C3D	H.W.	250	120	16	245
C2D	F.W.	125	60	16	245
C3D	F.W.	125	120	16	205
C2V	F.W.	125-0-125	120	16	120
C3V	F.W.	125-0-125	240	16	115
C3B	Bridge	250	120	16	250
DSM1	H.W.	250	60	8	250
DSM2/3	H.W.	250	120	16	250
RM0	H.W.	125	30	8	130
RM4	H.W.	250	250	32	268
SM1	H.W.	125	60	16	130
SM2/3	H.W.	125	120	16	100
SM5	H.W.	250	300	100	288
V18-28-1RW	F.W.	220-0-220	60	4	224
V25-28-1RW	F.W.	250-0-250	100	4	224
V25-40-1W	F.W.	350-0-350	150	4	345
V25-56-1RW	F.W.	500-0-500	100	4	535
Q3/1 and intermediate types to K3/200	H.W.	24	1	4	23
Q8/1 and intermediate types to K8/200	H.W.	4,800	1	0.01	5kV
N388/6 and intermediate types to N388/200	H.W.	108	10	16	137
	H.W.	3,600	10	0.5	4.25kV

C = Contact-cooled selenium rectifiers of small volume.

WESTINGHOUSE

Obsolete Types

011L999	H.W.	3.0	225	1.00	2.0
14RA 1-2-8-2†	H.W.	250	200	64	280
14RA 1-2-8-3†	H.W.	250	300	100	280
14RA 2-1-16-1†	C.T.	250-0-250	200	24	270
16K1 and intermediate types to 16K16	H.W.	15 and multiples to 240	8.0	32	15
	H.W.	240	8.0	2.0	240

(Continued)

Metal Rectifiers

Type	Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Reservoir Capacitance (μ F)	Rectified Volts
WESTINGHOUSE (Continued)					
<i>Obsolete Types (Continued)</i>					
18RA 1-1-8-1†	H.W.	125	60	32	140
18RA 1-1-8-2†	H.W.	125	120	64	140
18RA 1-1-16-1†	H.W.	250	60	16	280
18RA 1-2-8-1†	V.D.	125	60	32	270
18RA 2N-1-8-1†	C.T.	120-0-120	120	24	130
18RD 2-2-8-1†	Bridge	250	120	16	270
36K1 and intermediate types to 36K14	H.W.	27 and multiples to 378	2.0	4.0	30
	H.W.		2.0	0.5	440
<i>Current Types</i>					
4A88	V.D.	150	200‡	2 × 32	250
4C1017	C.T.	2.5-0-2.5	120‡	2,000	1.5
4D958	C.T.	2.5-0-2.5	100	2,000	1.5
5D1	H.W.	2	40	240	1.5
14A86	H.W.	240	200‡	64	280
14A97	F.W.	240	250‡	64	275
14A100	H.W.	250	200‡	64	290
14A124	F.W.	250	200‡	80	300
14A144	F.W.	350	200‡	64	500
14A163	V.D.	120	120‡	2 × 50	250
14A342	H.W.	250	300‡	100	290
14A975	H.W.	250	120‡	16	260
14A949	H.W.	250a.c./d.c.	200	100	280
14B35	H.W.	100	70‡	32	110
14B130	H.W.	240	200‡	64	265
14B261	H.W.	210	70‡	32	240
14B980	H.W.	240	70‡	50	275
14B986	H.W.	250	70‡	16	275
15B35	H.W.	240	45‡	32	270
15B39	C.T.	95-0-95	100‡	32	95
15C997	H.W.	125	35	36	150
15D19	H.W.	125	25	32	150
2 × 15D39	C.T.	120-0-120	45‡	32	140
16HT12 and intermediate types to 16HT258	H.W.	180	8	7	190
16MB1 and intermediate types to 16MB16	H.W.	3,865	8	0.2	4,120
16MB1 and intermediate types to 16RC1-1-16-1†	H.W.	15	8	32	15
16RC1-1-16-1†	H.W.	240	8	2	240
16RD2-2-8-1†	H.W.	250	20	4	280
16RE 2-1-8-1†*	Bridge	250	40	4	260
18RD 2N-1-16-1	C.T.	120-0-120	40	8	130
36EHT10 and intermediate types to 36EHT240	C.T.	250-0-250	120	16	270
36MB1 and intermediate types to 36MB.13	H.W.	270	2	0.5	300
39E10 and intermediate types to 39E60	H.W.	6,480	2	0.05	7,900
39K1 and intermediate types to 39K13	H.W.	30	2	4	30
39E10 and intermediate types to 39E60	H.W.	390	2	0.33	390
39K1 and intermediate types to 39K13	H.W.	270	0.1	0.25	310
39E60	H.W.	and multiples to 1,020	0.1	0.005	1,900
39K1 and intermediate types to 39K13	H.W.	30	0.1	0.2	30
39K13	H.W.	and multiples to 390	0.1	0.015	390
EC1†	H.W.	250	120§	32	280
EC1†	Bridge	250	120§	16	270
EC1†	C.T.	250-0-250	120§	16	270
EC2†	H.W.	250	60§	16	280
EC2†	V.D.	125	60§	16	260
EC3†	C.T.	250-0-250	180§	32	275
EC3†	H.W.	250	180§	50	280
EC3†	Bridge	250	180§	32	280
EC4†	H.W.	500	60§	8	560
EC4†	V.D.	250	60§	8	520
EC9†	H.W.	250	60§	16	280
EC10†	H.W.	150	60§	24	170

(Continued)

Metal Rectifiers

Type	Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Reservoir Capacitance (μ F)	Rectified Volts
WESTINGHOUSE (Continued)					
<i>Current Types (Continued)</i>					
EC11†	H.W.	500	75§	8	550
EC11†	V.D.	250	75§	8	550
EC12†	H.W.	300	60§	8	320
EC12†	V.D.	150	60§	16	320
EC13†	H.W.	400	60§	8	440
EC15†	Bridge	30	120§	120	32
EC16†	Bridge	90	120§	64	100
EC18†	Bridge	60	120§	64	65
EC19†	Bridge	120	120§	32	130
FC19†	C.T.	120-0-120	120§	32	130
FC31†	H.W.	250	300	100	280
FC101†	H.W.	250	200	64	280
FC107†	C.T.	250-0-250	200	24	270
FC116†	H.W.	250	0	16	280
FC117†	H.W.	125	120	64	140
FC118†	H.W.	125	60	32	140
HT43	V.D.	275	120	2 × 16	600
HT44	V.D.	210	120	2 × 16	400
HT45	V.D.	170	120	2 × 16	300
HT46	H.W.	250	120	16	240
HT47	H.W.	250	120	16	260
HT48	H.W.	250	45	8	260
HT49	H.W.	108	30	8	120
HT50	F.W.	300-0-300	0	8	350
HT51	F.W.	350-0-350	100	16	400
HT52	F.W.	350-0-350	200	32	400
HT53	F.W.	500-0-500	200	32	600
HT54	H.W.	120‡	60	16	110
HT57	H.W.	240	300	100	270
HT59	H.W.	250	300	100	280
HT60	H.W.	250	325	64	270
HT61	H.W.	250	350	64	270
HT62	H.W.	250	325	64	270
HT63	H.W.	250	325	64	270
LW7	H.W.	240	300‡	100	270
LW9	H.W.	250	300‡	100	280
LW13	H.W.	240	300	100	280
LW15	H.W.	250	200	100	280
011L992	H.W.	5	225	1,000	2.0

* The current rating given is typical for average conditions of ventilation, but the actual rating in any particular application will depend on the cooling provided and may be above or below the figure quoted.

‡ Maximum open circuit voltage. Potential divider (line cord) a.c. or d.c.

† Contact-cooled types.

* Case forms d.c. negative connection.

§ Max. output current for chassis temperature not greater than 55°C.

SEMICONDUCTOR RECTIFIERS

(Silicon or germanium diodes rated at over 300PIV or 100mA maximum rectified current ; but not exceeding 10A.)

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current +1V (mA)	Application	Connections
				-10V	-50V			
A.E.I.								
<i>Current Types</i>								
GJ3M	Germanium	200	550§	—	—	—	} Medium-power rectifier	Terminal studs
GJ4M	Germanium	75	800§	—	—	—		
GJ5M	Germanium	300	550§	—	—	—		
GJ6M	Germanium	150	800§	—	—	—		
MS1H	Silicon	60	250	—	50**	200	} General purpose for ambient temperature up to 150°C	Wire ended
MS2H	Silicon	100	250	—	50**	200		
MS3H	Silicon	150	250	—	100**	200		
MS4H	Silicon	200	250	—	100**	200		
MS5H	Silicon	300	250	—	100**	200		

(Continued)

Semiconductor Rectifiers

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current +1V (mA)	Application	Connections
				-10V	-50V			
A.E.I. (Continued)								
<i>Current Types (Continued)</i>								
SJ051A	Silicon	50	1,500††	—	500‡	—	Medium-power rectifier for ambient temperature up to 120°C or 200°C	Terminal studs
SJ051B		50	700	—	500‡	—		Wire ended
SJ052A		50	2,300††	—	1,500***	—		Terminal studs
SJ052B		50	1,000	—	1,500***	—		Wire ended
SJ101A		100	1,500††	—	500‡	—		Terminal studs
SJ101B		100	700	—	500‡	—		Wire ended
SJ102A		100	2,300††	—	1,500***	—		Terminal studs
SJ102B		100	1,000	—	1,500***	—		Wire ended
SJ201A		200	1,500††	—	500‡	—		Terminal studs
SJ201B		200	700	—	500‡	—		Wire ended
SJ202A		200	2,300††	—	1,500***	—		Terminal studs
SJ202B		200	1,000	—	1,500***	—		Wire ended
SJ301A		300	1,500††	—	500‡	—		Terminal studs
SJ301B		300	700	—	500‡	—		Wire ended
SJ302A		300	2,300††	—	1,500***	—		Terminal studs
SJ302B		300	1,000	—	1,500***	—		Wire ended
SJ401A		400	1,500††	—	500‡	—		Terminal studs
SJ401B		400	700	—	500‡	—		Wire ended
SJ402A		400	2,300††	—	1,500***	—		Terminal studs
SJ402B		400	1,000	—	1,500***	—		Wire ended
SJ501A		500	1,500††	—	500‡	—		Terminal studs
SJ501B		500	700	—	500‡	—		Wire ended
SJ601A		600	1,500††	—	500‡	—		Terminal studs
SJ601B		600	700	—	500‡	—		Wire ended

†† Rectifiers mounted on suitable cooling fins. § Higher current ratings obtainable if rectifiers are mounted on cooling fins.

** At max. PIV and 150°C. ‡ Pk a.c. at maximum PIV and 120°C. *** Pk a.c. at maximum PIV and 200°C.

Type	Nature	Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Reservoir Capacitance	Rectified Volts	Connections
A10AA	Silicon rectifier finned assemblies	HW	35	1,400	—	15	—
A10BA		FW	35	2,800	—	28	—
A11AA		HW	71	1,400	—	31	—
A11BA		FW	71	2,800	—	59	—
A12AA		HW	141	1,400	—	62	—
A12BA		FW	141	2,800	—	123	—
A13AA		HW	212	1,400	—	94	—
A13BA		FW	212	2,800	—	187	—
A14AA		HW	283	1,400	—	127	—
A14BA		FW	283	2,800	—	251	—
A23AA		HW	424	1,400	—	190	—
A23BA		FW	424	2,800	—	376	—
A24AA		HW	565	1,400	—	253	—
A24BA		FW	565	2,800	—	502	—
A25AA		HW	707	1,400	—	316	—
A25BA		FW	707	2,800	—	630	—
A34AA		HW	850	1,400	—	380	—
A34BA		FW	850	2,800	—	752	—
B10AA		HW	35	2,200	—	15	—
B10BA		FW	35	4,400	—	28	—
B11AA		HW	71	2,200	—	31	—
B11BA		FW	71	4,400	—	59	—
B12AA		HW	141	2,200	—	62	—
B12BA		FW	141	4,400	—	123	—
B13AA		HW	212	2,200	—	94	—
B13BA		FW	212	4,400	—	187	—
B14AA		HW	283	2,200	—	127	—
B14BA		FW	283	4,400	—	251	—
B23AA		HW	424	2,200	—	190	—
B23BA		FW	424	4,400	—	376	—
B24AA		HW	565	2,200	—	253	—
B24BA		FW	565	4,400	—	502	—
B34BA		FW	850	4,400	—	752	—

(Continued)

Type	Nature	Type of Rectification	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Reservoir Capacitance	Rectified Volts	Connections
A.E.I. (Continued)							
<i>Current Types (Continued)</i>							
GA31A	Germanium rectifier finned assemblies	F.W.	141	2,000	—	125	—
GA41A		F.W.	53	2,000	—	46	—
GA51A		F.W.	212	2,000	—	189	—
GA52A		F.W.	340	2,000	—	303	—
GA53A		F.W.	510	2,000	—	455	—
GA61A		F.W.	106	2,000	—	94	—
GA62A		F.W.	170	2,000	—	150	—
GA63A	F.W.	255	2,000	—	225	—	
HTS5A	Resin-moulded silicon stacks	5,000 PIV	—	500	—	—	—
HTS10A		10,000 PIV	—	500	—	—	—
SR2201A	Potted silicon rectifiers	F.W., Cf or F.W. bridge connection for max. rect. current 1.4A at input up to 353V r.m.s.	400 PIV*	700†	—	—	International Octal base.
SR2301A		600 PIV*	700†	—	—		
SR4201A		800 PIV*	700†	—	—		
SR4301A		1,200 PIV*	700†	—	—		
SR4401A		1,600 PIV*	700†	—	—		
SR4501A		2,000 PIV*	700†	—	—		

* For all internal sections in series. † For resistive or inductive load. I_{max} for capacitive load = 560mA.

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current +1V (mA)	Application	Connections
				-10V	-50V			

EDISWAN MAZDA

<i>Current Type</i>								
XU604	Silicon	400	500	100 at PIV	—	—	Power rectifier	Wire ended

FERRANTI

<i>Current Types</i>								
ZR10	Silicon	14	1,500	—	—	13	Power rectifiers	Wires
ZR10T		14	1,500	—	—	13		Wire and stud
ZR10TR		14	1,500	—	—	13		Stud cathode
ZR11		28	1,500	—	—	27		Wires
ZR11T		28	1,500	—	—	27		Wire and stud
ZR11TR		28	1,500	—	—	27		Stud cathode
ZR12		56	1,500	—	—	55		Wires
ZR12T		56	1,500	—	—	55		Wire and stud
ZR12TR		56	1,500	—	—	55		Stud cathode
ZR13		84	1,500	—	—	83		Wires
ZR13T		84	1,500	—	—	83		Wire and stud
ZR13TR		84	1,500	—	—	83		Stud cathode
ZR14		112	1,500	—	—	113		Wires
ZR14T		112	1,500	—	—	110		Wire and stud
ZR14TR		112	1,500	—	—	110		Stud cathode
ZR15	140	750	—	—	139	Wires		
ZR15T	140	750	—	—	139	Wire and stud		
ZR15TR	140	750	—	—	139	Stud cathode		
ZR20	14	8,000	—	—	13	Wire and stud		
ZR20R	14	8,000	—	—	13	Stud cathode		
ZR21	28	8,000	—	—	27	Wire and stud		
ZR21R	28	8,000	—	—	27	Stud cathode		
ZR22	56	8,000	—	—	55	Wire and stud		
ZR22R	56	8,000	—	—	55	Stud cathode		
ZR23	84	8,000	—	—	83	Wire and stud		
ZR23R	84	8,000	—	—	83	Stud cathode		
ZR24	112	8,000	—	—	111	Wire and stud		
ZR24R	112	8,000	—	—	111	Stud cathode		
ZS24	Silicon	400	100	—	< 0.5†	—	Magnetic amplifiers, demodulators, etc.	Wires—single ended
ZS25		500	100	—	< 0.5†	—		
ZS30A		50	500	—	< 0.2†	—		
ZS30B		50	500	—	< 0.5†	—		
ZS31A		100	500	—	< 0.2†	—		
ZS31B		100	500	—	< 5.0†	—		
ZS32A		200	500	—	< 0.2†	—		
ZS32B		200	500	—	< 5.0†	—		
ZS33A		300	500	—	< 0.2†	—		
ZS33B		300	500	—	< 5.0†	—		
ZS34A	400	500	—	< 0.2†	—	General purpose	Axial wires. Coloured band at positive end.	
ZS34B	400	500	—	< 5.0†	—			

(Continued)

Semiconductor Rectifiers

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current +1V (mA)	Application	Connections	
				-10V	-50V				
FERRANTI (Continued)									
<i>Current Types (Continued)</i>									
ZS50	Silicon	60	200	—	<0.5†	—	General purpose	Wires—single ended	
ZS51		120	200	—	<0.5†	—			
ZS52		200	200	—	<0.5†	—			
ZS53		300	200	—	<0.5†	—			
				* At 1.2 volts.	† At PIV.	‡ With cooling fin.			
G.E.C.									
<i>Current Types</i>									
GEX541	Germanium	80	6,000**	1,000	1,000	4,000††	General purpose	Cathode stud	
GEX542	Germanium	160	6,000**	800	1,000	4,000††			
SX631	Silicon	100	750	1*	—	1,000	General purpose	Cathode stud	
SX632	Silicon	250	750	3*	—	1,000			
SX633	Silicon	300	750	3*	—	1,000			
SX634	Silicon	400	750	5*	—	1,000	Detectors, switching	Cathode lead red	
SX641	Silicon	60	290	1*	—	100			
SX642	Silicon	120	270	2*	—	100			
SX643	Silicon	180	260	3*	—	100			
SX644	Silicon	300	190	4*	—	100	General purpose	Anode stud	
SX645	Silicon	400	190	5*	—	100			
SX751	Silicon	100	8,000**	200†	—	1,000	General purpose	Anode stud	
SX752	Silicon	200	8,000**	200†	—	1,000			
SX753	Silicon	300	8,000**	200†	—	1,000			
SX754	Silicon	400	8,000**	200†	—	1,000			
				* At PIV at 100°C.	** With cooling fins.	† At PIV at 150°C.	†† At 0.4V.		
MULLARD									
<i>Current Types</i>									
BYZ12	Silicon	400	6,000	—	750 (at -400V)	5,000 (at +1.5V)	Power rectifier	Wires. Threaded stud at positive end	
BYZ13	Silicon	200	6,000	—	750 (at -200V)	5,000 (at +1.5V)			
OA5	Germanium	100	115*	1.1	2.5	200 (at +0.8V)	General purpose industrial	Wires. Cathode adjacent to coloured dot Wires. Coloured band at positive end Wires. Coloured band at positive end	
OA200	Silicon	50	160	—	0.02	30 (at +0.9V)			
OA202	Silicon	150	160	—	0.01	30 (at +0.9V)			
OA210	Silicon	400	500*	25 (at -60V)	45 (at -400V)	400 (at +0.9V)	Power rectifier	Wires. Threaded stud at positive end	
OA211	Silicon	800	400*	10 (at -170V)	15 (at -700V)	400			
				* With cooling fins.					
S.T.C.									
<i>Obsolete Types</i>									
RS20A	Silicon	50	500	—	—	—	Power rectifier	Axial lead wires. Red and black sleeves.	
RS21A	Silicon	100	500	—	—	—			
RS22A	Silicon	150	500	—	—	—			
RS23A	Silicon	300	500	—	—	—			
RS24A	Silicon	300	500	—	—	—			
RS25A	Silicon	400	500	—	—	—			
RS30A	Silicon	50	1,000	—	—	—			
RS31A	Silicon	100	1,000	—	—	—			
RS32A	Silicon	150	1,000	—	—	—			
RS33A	Silicon	200	1,000	—	—	—			
RS34A	Silicon	200	1,000	—	—	—			
RS35A	Silicon	400	1,000	—	—	—			
<i>Current Types</i>									
RS20AF	Silicon	50	200†	—	—	—	General purpose power rectifiers.	Axial lead wires, Red and blue sleeves.	
RS21AF	Silicon	100	200†	—	—	—			
RS22AF	Silicon	150	200†	—	—	—			
RS23AF	Silicon	200	200†	—	—	—			
RS24AF	Silicon	300	200†	—	—	—			
RS25AF	Silicon	400	100†	—	—	—			
RS26AF	Silicon	500	100†	—	—	—			
RS27AF	Silicon	600	100†	—	—	—			
RS28AF	Silicon	800	100‡	—	—	—	Stud (positive) and flexible-braid sleeved lead		
RS30BF	Silicon	50	250	—	—	—			
RS31BF	Silicon	100	250	—	—	—			
RS32BF	Silicon	150	250	—	—	—			

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current $-IV$ (mA)	Application	Connections
				-10V	-50V			
S.T.C. (Continued)								
<i>Current Types (Continued)</i>								
RS33BF	Silicon	200	250	—	—	—	General purpose power rectifiers.	Stud (positive) and flexible-braid sleeved lead.
RS34BF	Silicon	300	250	—	—	—		
RS35BF	Silicon	400	250	—	—	—		
RS36BF	Silicon	500	250	—	—	—		
RS37BF	Silicon	600	250	—	—	—		
RS38BF	Silicon	800	250	—	—	—		Stud (negative) and flexible-braid sleeved lead.
RS50AF	Silicon	50	100	—	—	—		
RS51AF	Silicon	100	100	—	—	—		
RS52AF	Silicon	150	100	—	—	—		
RS53AF	Silicon	200	100	—	—	—		
RS54AF	Silicon	300	100	—	—	—		
RS54AF	Silicon	400	100	—	—	—		
RS55AF	Silicon	500	100	—	—	—		
				‡ At 100°C.				

TEXAS								
<i>Current Types</i>								
IS001 (CV7027)	Diffused silicon. Metal case.	200	750	—	<10 (at -200V)	—	Magnetic amplifiers, power supplies, high temperature operation.	Axial wires. Arrow indicates forward current flow.
IS002		300	750	—	<10 (at -300V)	—		
IS003 (CV7028)		400	750	—	<10 (at -400V)	—		
IS004		500	750	—	<10 (at -500V)	—		
IS005		600	750	—	<10 (at -600V)	—		
IS101		200	750	—	<10 (at -200V)	—		
IS103		400	750	—	<10 (at -400V)	—		
IS105		600	750	—	<10 (at -600V)	—		
IS107		800	750	—	<10 (at -800V)	—		
IS111 (CV7045)		Diffused silicon. Glass seal.	200	400	—	<0.2 (at -200V)		
IS113 (CV7013)	400		400	—	<0.2 (at -400V)	—		
IS115 (CV7046)	600		400	—	<0.2 (at -600V)	—		
IS401	200		3,000	—	<10 (at -200V)	—		
IS402	Diffused silicon. Metal case.	300	3,000	—	<10 (at -300V)	—	Power supplies, medium power high temperature operation.	Anode to tag, cathode to stud. Addition of "R" to type number indicates anode to stud.
IS403		400	3,000	—	<10 (at -400V)	—		
IS404		500	3,000	—	<10 (at -500V)	—		
IS405		600	3,000	—	<10 (at -600V)	—		
IS600		50	3,000	—	<1,000 (at -50V)	—		
IS601		100	3,000	—	<1,000 (at -100V)	—		
IS602	p-n-p-n diffused silicon controlled rectifiers. Metal case, stud mounting.	200	3,000	—	<1,000 (at -200V)	—	High-speed power switching at high temperature.	Anode to stud, cathode to large tag. Gate to small tag.
IS603		300	3,000	—	<1,000 (at -300V)	—		
IS604		400	3,000	—	<1,000 (at -400V)	—		
IS610		50	1,000	—	<1,000 (at -50V)	—		
IS611		100	1,000	—	<1,000 (at -100V)	—		
IS612		200	1,000	—	<1,000 (at -200V)	—		
IS613		300	1,000	—	<1,000 (at -300V)	—		
IS614		400	1,000	—	<1,000 (at -400V)	—		

(Continued)

Semiconductor Rectifiers

Type	Nature	Peak Inverse Volts	Max. Rect. Current (mA)	Reverse Current (μ A)		Forward Current +IV (mA)	Application	Connections
				-10V	-50V			
<i>TEXAS (Continued)</i>								
<i>Obsolete Types (Continued)</i>								
1N1130	Diffused silicon. Metal case, stud mounting.	1,500	300	—	<50	—	High voltage power rectification.	Cathode to stud. Anode to stud.
1N1131		1,500	300	—	(at -1,500V) <50 (at -1,500V)	—		

E.H.T. RECTIFIERS

(Rectifiers for inputs over 1,000V giving rectified currents of less than 50mA)

Type	Heater		Peak Inverse Volts	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Effective Series R (Ω)	Recommended Reservoir Capacitance (μ F)	D.C. Output Voltage	Capacitance a-k (pF)	Base	
	Volts	Amps								Type	Ref.
BRIMAR											
<i>Obsolete Types</i>											
R10	4.0	0.5	12,500	3,500	5.0	62,000	0.25	—	—	B7G	22
R11	4.0	1.1	—	5,000	5.0	4,000	1.0	—	—	B4	6
<i>Replacement Types</i>											
R19/1X2B	1.25	0.2	25,000	—	2.0	—	—	—	1.0	B9A	32
R16/1T2	1.4	0.14	15,000	—	2.0	—	—	—	0.65	Wires	
R12	6.3	0.09	17,000	—	0.1	10,000	0.1	—	—		
<i>Current Types</i>											
DY86	1.4	0.55	22,000	—	0.8	—	0.002	—	1.7	B9A	50
R20	2.0	0.35	22,000	—	0.8	—	0.002	—	1.7	B9A	50
EY86	6.3	0.09	22,000	—	0.8	—	0.002	—	1.7	B9A	50
COSSOR											
<i>Obsolete Types</i>											
405BU	4.0*	0.5	—	{ 1,500-0-1,500 }	25	2,000	4.0	—	—	B4	5
5W2	6.3	0.08	25,000	—	0.5	—	0.005	—	0.7	Wires	
<i>Replacement Types</i>											
SU25	2.0	0.5	25,000	—	1.0	—	0.1	—	—	IO	102
SU2150	2.0	1.15	—	8,000	2.0	100,000	0.25	—	—	B4	6
SU2150A	2.0	1.5	—	5,000	10.0	10,000	0.25	—	—	B4	17
<i>Current Types</i>											
SU42	4.0	1.25	—	{ 6,000-5,000 }	40.0 50.0	5,000 4,000	1.0 1.0	—	—	IO	103
EY51 (SU61)	6.3	0.09	{ 15,000-15,000 }	—	0.1 0.5	100,000 100,000	0.001 0.1	—	—	Wires	
EY86	6.3	0.09	22,000	—	0.8	—	0.002	—	1.7		
EDISWAN MAZDA											
<i>Obsolete Types</i>											
MU2 (HW, MV)	2.0*	3.1	—	4,500	5.0	10,000	—	—	—	B4	6
U21	2.0	1.85	—	4,500	5.0	—	—	—	—	B4	6
<i>Replacement Types</i>											
U22	2.0	2.0	—	5,200	1.0	50,000	0.1	—	—	MO	17
U24	2.0	0.15	20,000	—	0.1	—	0.00025	15,000	1.3	IO	102
U25	Sine-wave operation	2.0	20,000	—	0.5	—	to 0.001	9,500	1.3		
										Sine-wave operation	19,000
			19,000†	—	0.5	—	to 0.001	9,500	0.6		
<i>Current Types</i>											
U26	2.0	0.35	23,500	—	0.2	—	0.00025	—	0.9	B9A	50
19H4	2.5	1.7	—	7,000	30.0	18,000	0.5	—	—	IO	58
19G3	4.0	1.4	—	2,200	50.0	1,900	5.0	—	—	IO	119
19G6	4.0	0.5	—	2,500	30.0	5,400	1.0	—	—	B7G	22
S19G6 (SQ)	4.0	0.5	—	2,000	30.0	4,500	1.1	—	—	B7G	78
S19G6F (SQ)	4.6	0.5	—	2,000	30.0	4,500	1.1	—	—	B7G	78
† at <250 kc/s.											
EMITRON											
<i>Obsolete Types</i>											
SU45	4.0	0.5	—	2,500	30.0	5,400	1.1	—	—	B7G	22
6W2	6.3	0.08	25,000	—	{ 0.5-30.0 }	100,000	0.005 0.1	—	0.7	Wires	
<i>Replacement Type</i>											
SU25	2.0	0.5	25,000	—	1.0	100,000	0.1	—	—	IO	102
<i>Current Type</i>											
SU2150A	2.0	1.5	—	5,000	10.0	10,000	0.25	—	—	B4	17

(Continued)

Type	Heater		Peak Inverse Volts	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Effective Series R (Ω)	Recommended Reservoir Capacitance (μ F)	D.C. Output Voltage	Capacitance a-k (pF)	Base	
	Volts	Amps								Type	Ref.
FERRANTI											
<i>Replacement Types</i>											
HR1	0.65*	0.055	12,500	5,000	0.05	2M Ω	0.002	—	0.7	B7G	1
6W2	6.3	0.08	25,000	—	0.5	—	0.005	—	0.7	Wires	
<i>Current Types</i>											
HR2	4.0	0.5	13,000	5,000	5.0	50,000	0.25	5,500	—	B7G	22
HR3	4.0	0.5	11,500	5,000	15.0	30,000	1.0	—	—	B7G	22
HR8	4.0	1.25	16,500	{ 6,000 5,000	{ 40.0 50.0	{ 5,000 4,000	{ 1.0 1.0	—	—	10	103
HR9	4.0	1.3	14,000	15,000	8.0	100,000	0.1	—	—	10	131
HR11	4.0*	1.9	35,000	14,500	3.0	—	—	—	—	10	120
HR12	2.5*	5.0	35,000	—	25	27,000	0.1	—	—	UX4	18
EY51/6X2	6.3	0.09	17,000	—	0.35	—	0.005	—	0.8	Wires	
Sine-wave operation (10-500 kc/s)			17,000	—	0.5	—	0.01	—			
EY86/6S2	6.3	0.09	22,000	—	0.8	—	0.002	—	1.7	B9A	50
G.E.C.											
<i>Obsolete Types</i>											
U41	1.25	9.2	—	12,300	2.0	300,000	—	—	—	10	58
U17	4.0*	1.0	—	2,500	30.0	2,000	1.0	—	—	B4	6
U27	4.0	1.0	—	5,000	50.0	4,000	—	—	—	B4	6
U60	6.3	0.265	—	10,600	4.0	—	—	—	—	10	139
<i>Replacement Types</i>											
U37	1.4	0.14	15,000	—	2.0	—	0.001	7,500	0.45	Wires	
U45	6.3	0.12	18,000	—	0.35	100,000	0.005	—	0.8	Wires	
U16	2.0*	1.0	—	5,000	2.0	—	0.25	—	—	B4	6
U33	2.0*	1.0	—	6,300	3.0	100,000	0.25	—	—	B4	6
CV4071	4.0	1.5	—	6,000	50.0	—	—	—	—	10	103
EY51/U43	6.3	0.09	17,000	—	0.35	100,000	0.005	—	0.8	Wires	
EY86	6.3	0.09	22,000	—	0.8	—	0.002	—	1.7	B9A	50
<i>Current Types</i>											
U47	2.0	0.2	20,000	—	0.2	—	0.00025	15,000	—	Wires	
U49	2.0	0.35	25,000	—	0.2	—	0.00005 to 0.001	—	—	B9A	50
MARCONI											
<i>Obsolete Types</i>											
U151	6.3	0.09	17,000	—	0.35	—	0.005	—	0.8	Wires	
Sine-wave operation			17,000	—	0.5	—	0.01	—	0.8		
<i>Replacement Types</i>											
U35	1.4	0.12	—	3,500	2.0	—	0.001	—	—	10	120
U16	2.0*	1.0	—	5,000	2.0	—	0.25	—	—	B4	6
U33	2.0*	0.15	—	6,300	3.0	100,000	0.25	—	—	B4	6
U17	4.0*	1.0	—	2,500	30	2,000	1.0	—	—	B4	6
<i>Current Types</i>											
U37	1.4	0.14	15,000	—	2.0	—	0.001	7,500	0.65	Wires	
EY51/U43	6.3	0.09	17,000	—	0.35	100,000	0.005	—	0.8	Wires	
Sine-wave operation			17,000	—	0.5	—	0.01	—	0.8	Wires	
EY86	6.3	0.09	22,000	—	0.8	—	0.002	—	6.7	B9A	50
U45	6.3	0.12	18,000	—	0.35	100,000	0.005	—	0.8	Wires	
MULLARD											
<i>Obsolete Types</i>											
DY70	1.25*	0.14	—	2,900	1.8	150,000	0.1	—	—	Wires	
HVR1	2.0	0.29	—	6,000	5.0	—	—	—	—	B4	6
HVR2A	2.0	1.5	—	6,000	3.0	—	0.2	—	—	B4	6
HVR2	4.0	0.65	—	6,000	3.0	—	0.2	—	—	B4	17
<i>Current Types</i>											
EY51 Pulsed input	6.3	0.09	17,000	—	0.35	—	0.005	—	0.08	Wires	
Sine-wave operation (10-500 kc/s)			17,000	—	0.5	—	0.001	—	0.8		
EY86 Pulsed input	6.3	0.09	22,000	—	0.8	—	0.002	—	1.7	B9A	50
TY86F Pulsed input	7.4	0.077	—	—	—	—	—	—	—		
Other data as EY86											
S.T.C.											
<i>Current Types</i>											
K8/80	—	—	6,400	—	0.1	—	0.005	5,600	—	(metal rectifier)	
K8/100	—	—	8,000	—	0.1	—	0.005	7,200	—	(metal rectifier)	
K8/120	—	—	9,600	—	0.1	—	0.005	8,600	—	(metal rectifier)	
K8/140	—	—	11,200	—	0.1	—	0.005	10,000	—	(metal rectifier)	
K8/180	—	—	14,400	—	0.1	—	0.005	12,900	—	(metal rectifier)	
K8/200	—	—	16,000	—	0.1	—	0.005	14,400	—	(metal rectifier)	
2T/270K	4.0	0.5	15,500	—	5.0	50,000	0.3	5,500	—	B7G	22

(Continued)

E.H.T. Rectifiers

Type	Heater		Peak Inverse Volts	Input Volts (R.M.S.)	Max. Rect. Current (mA)	Min. Effective Series R (Ω)	Recommended Reservoir Capacitance (μF)	D.C. Output Voltage	Capacitance a-k (pF)	Base	
	Volts	Amps								Type	Ref.
TUNGSRAM											
<i>Current Types</i>											
6X2	6.3	0.09	17,000	—	0.35	—	0.005	—	0.8	Wires	50
Sine-wave operation (10-500 kc/s)			17,000	—	0.5	—	0.01	—	0.8	Wires	
EY86	6.3	0.09	22,000	—	0.8	—	0.002	—	1.7	B9A	
WESTINGHOUSE											
<i>Current Types</i>											
39E10	Sine-wave operation and intermediate types to		850	—	0.1	—	0.025	310	—	Metal rectifiers	
39E60	Sine-wave operation		5,100	—	0.1	—	0.005	1,900	—		
36EHT20	Sine-wave operation and intermediate types to		1,700	—	2.0	—	0.5	600	—		
36EHT240	Sine-wave operation		20,400	—	2.0	—	0.05	7,900	—		
39E20 and intermediate types to			1,450	—	0.1	—	—	1,310	—		
39E60			4,350	—	0.1	—	—	3,430	—		
36EHT20 and intermediate types to			1,450	—	0.1	—	—	1,310	—		
36EHT240			17,400	—	0.1	—	—	15,700	—		
AMERICAN											
<i>Current Types</i>											
1B3	1.25	0.2	40,000	—	2.0	—	—	—	—	IO	58
2B25	1.4	0.11	—	1,000	1.5	—	—	—	—	B7G	12
1Z2	1.5	0.3	—	7,800	2.0	—	—	—	—	B7G	10
2V3	2.5	5.0	16,500	—	2.0	—	—	—	—	IO	58
2X2	2.5	1.75	—	4,500	5.0	—	—	—	—	UX4	8
2Y2	2.5	1.75	—	4,400	5.0	—	—	—	—	UX4	8
3B26	2.5	4.75	15,000	—	26.0	—	—	—	—	IO	58
5X3	5.0	2.0	—	1,275-0-1,275	30.0	—	—	—	—	UX4	3
6Y3	6.3	0.7	—	5,000	7.5	—	—	—	—	IO	102

CATHODE-RAY TUNING INDICATORS

Type	Heater		Target Volts	Target Current (mA)	Grid Voltage Change	Base	
	Volts	Amps				Type	Ref.
BRIMAR							
<i>Obsolete Types</i>							
6U5G	6.3	0.3	250	4.0	22	IO	46
EM71	6.3	0.3	250	2.5	20	B8B	57
12U5	12.6	0.15	Other data as type 6U5G		—	—	—
1629	12.6	0.15	250	4.0	8	IO	46
<i>Replacement Types</i>							
6U5/6G5	6.3	0.3	250	4.0	22	UX6	11
EM85	6.3	0.3	250	2.1	18	B9A	40
<i>Current Types</i>							
EM84	6.3	0.25	250	1.1 to 1.6	22	B9A	56
EM840	6.3	0.25	250	1.1 to 1.6	21	B9A	56
COSSOR							
<i>Obsolete Types</i>							
63ME	6.3	0.3	250	4.5	22	IO	46
65ME	6.3	0.3	250	2 to 2.3	15	B9A	41
<i>Current Types</i>							
64ME (Dual sensitivity)	6.3	0.2	250	0.75	2.5 & 16	IO	48
EM81	6.3	0.3	250	2 to 2.3	9.5	B9A	41
EDISWAN MAZDA							
<i>Obsolete Types</i>							
AC/ME	4.0	0.5	250	1.5	22	B7	19
ME41	4.0	0.5	250	1.16	22.5	MO	21
ME91	9.0	0.2	175	2.7	19	MO	21
ME920	9.0	0.2	175	2.6	19	B7	19
10M1	18.0	0.1	250	1.16	22.5	IO	46
<i>Replacement Types</i>							
6M1	6.3	0.3	250	1.16	22.5	IO	46
6M2 (Dual sensitivity)	6.3	0.2	250	0.46	4 & 20	IO	135
10M2 (Dual sensitivity)	12.6	0.1	200	0.4	3 & 20	IO	136
<i>Current Type</i>							
1M1	1.4	0.025	{ 90 60	{ 0.25 0.12	{ 13.5 8.0	B8D	9

(Continued)

Cathode-Ray Tuning Indicators

Type	Heater		Target Volts	Target Current (mA)	Grid Voltage Change	Base	
	Volts	Amps				Type	Ref.
FERRANTI							
<i>Obsolete Types</i>							
FT4	4.0	0.5	200-250	0.5	6	IO	46
VFT4	4.0	0.5	200-250	0.5	20	IO	46
<i>Replacement Types</i>							
VFT6	6.3	0.3	200	4.5	22	IO	46
1629	12.6	0.15	250	2.0	7.5	IO	46
<i>Current Types</i>							
DM70/1M3	1.4*	0.025	{ 85 60	{ 0.17 0.1	{ 10 7	B8D	9
EM80/6BR5	6.3	0.3	250	2.3	13	B9A	41
EM81	6.3	0.3	250	2.3	9.5	B9A	41
G.E.C.							
<i>Obsolete Types</i>							
Y25	1.4	0.25	{ 90 60	{ 0.25 0.12	{ 13.5 8	B8D	9
Y62	6.3	0.3	80-250	4.5	22	IO	46
Y63	6.3	0.3	180-250	4.5	22	IO	46
Y64	6.3	0.3	80-250	4.5	22	IO	46
Y65	6.3	0.3	180-250	4.5	11	IO	46
Y119	19	0.1	90-250	1.0	1.3	B9A	41
<i>Replacement Type</i>							
Y61	6.3	0.3	180-250	4.5	22	IO	46
MARCONI							
<i>Current Types</i>							
EM80	6.3	0.3	250	2.0	13	B9A	41
EM81	6.3	0.3	250	2 to 2.3	9.5	B9A	41
MULLARD							
<i>Obsolete Types</i>							
TV4	4.0	0.3	250	0.13	5	C18	9
EM1	6.3	0.2	250	0.13	5	C18	9
EM3	6.3	0.2	250	0.3	21	C18	9
EM4 (Dual sensitivity)	6.3	0.2	250	0.75	5 & 16	C18	20
UM34 (Dual sensitivity)	12.6	0.1	250	0.75	5 & 16	IO	48
<i>Replacement Types</i>							
DM70	1.4*	0.025	{ 85 60	{ 0.17 0.1	{ 10 7	B8D	9
EM34 (Dual sensitivity)	6.3	0.2	250	0.75	5 & 16	IO	48
EM80	6.3	0.3	250	2.3	13	B9A	41
EM81	6.3	0.3	250	2.3	9.5	B9A	41
UM4	12.6	0.1	200	1.4	4.2 & 12.5	IO	136
<i>Current Types</i>							
EM84 (Dual sensitivity)	6.3	0.27	250	1.6	22.0	B9A	56
UM80	19.0	0.1	200	7.0	13.0	B9A	41
TUNGSRAM							
<i>Obsolete Types</i>							
VME4	4.0	0.5	250	2.0	22	B7	19
6G5G	6.3	0.3	250	2.0	22	IO	46
EFM1	6.3	0.2	250	0.75	20	C18	18
EM1 (Dual sensitivity)	6.3	0.2	250	0.7	5	C18	9
EM4 (Dual sensitivity)	6.3	0.2	250	0.75	5 & 16	C18	20
ME6-S	6.3	0.2	250	2.0	5	C18	9
<i>Replacement Type</i>							
EM34	6.3	0.2	250	0.75	5 & 16	IO	48
<i>Current Types</i>							
DM70	1.4*	0.025	{ 85 60	{ 0.17 0.10	{ 10 7	B8D	9
6FG6	6.3	0.27	250	1.6	22	B9A	55
6U5G	6.3	0.3	250	0.4	22	IO	46
EM80	6.3	0.3	250	2.3	13	B9A	41
EM81	6.3	0.3	250	2.3	9.5	B9A	41

(Continued)

Cathode-Ray Tuning Indicators

Type	Heater		Target Volts	Target Current (mA)	Grid Voltage Change	Base	
	Volts	Amps				Type	Ref.
AMERICAN							
<i>Current Types</i>							
2E5	2.5	0.8	250	4.0	7.5	UX6	11
2G5	2.5	0.8	250	4.0	22	UX6	11
6AB5	6.3	0.15	135	1.9	15.5	UX6	11
6N5							
6AD6 (Dual sensitivity)	6.3	0.15	150	3.0 & 1.2	3.0 & 5.0	1O	46
6AF6	6.3	0.15	135	1.5	81	1O	100
6AF7	6.3	0.3	—	—	—	1O	48
6AL7	6.3	0.15	300	—	—	1O	101
6E5	6.3	0.3	250	2.0	7.5	UX6	11
6G5	6.3	0.3	250	4.0	22	UX6	11
6H5							
6U5							
6T5	6.3	0.3	250	4.0	—	UX6	11
6X6	6.3	0.3	250	2.0	—	1O	46
1629	12.6	0.15	250	2.0	7.5	1O	46

BARRETTERS

Type	Stabilized Current (A)	Voltage Drop	Base		Type	Stabilized Current (A)	Voltage Drop	Base			
			Type	Ref.				Type	Ref.		
BRIMAR					G.E.C. (Continued)						
<i>Current Type</i>					<i>Replacement Types (Continued)</i>						
D15	0.15	90-140	1O	75	302	0.3	112-195	Edison Screw			
EDISWAN MAZDA					303	0.3	86-129	"	"		
<i>Obsolete Types</i>					304	0.3	95-165	"	"		
BU10	0.13	50-80	B4	13	305	0.3	40-90	"	"		
BU29/4	0.285	2.5-6	1O Pins 2 & 7		HIVAC						
BU30/6	0.3	3-9	Edison Screw		<i>Current Types</i>						
BU65/10	0.65	6-14	Edison Screw		XB1	0.3	9-16	B7G	57		
BU78/10	0.78	8-14	B4	20	XB2	0.305	7.4-12.4	B7G	57		
BU115/22	1.15	11-31	B4	20	TUNGSRAM						
BU200/14	2.0	8-20	B4	20	<i>Obsolete Types</i>						
BU280/20	2.8	10-30	B4	13	BR201	0.2	90-230	B4	13		
BU600/6	6.0	3-9	Edison Screw		BR201S			0.2	40-100	Ct8	8
G.E.C.					BR202					3.0	7-18
<i>Obsolete Type</i>					BR202S	0.3	90-230	Ct8	8		
101	0.1	75-150	1O	75	BR300OC			3.0	7-18		
<i>Replacement Types</i>					BR300	0.3	90-230	B4	13		
161	0.16	100-180	Edison Screw		BR1500	1.5	—				
301	0.3	138-221	Edison Screw								

VALVE VOLTAGE STABILIZERS

Type	Mean Stab. Volts	Striking Volts	Tube Current (mA)		Regulation (volts)	Base	
			Min.	Max.		Type	Ref.
BRIMAR							
<i>Current Types</i>							
OC2	75	115	5	30	4.5	B7G	28
VR75/30	75	100	5	40	6.5	1O	74
VR105/30	105	135	5	40	4.0	1O	74
OB2	108	133	5	30	4.0	B7G	28
OA2	150	185	5	30	6.0	B7G	28
VR150/30	150	180	5	40	5.5	1O	74
6BK4	E.H.T. Voltage Regulator					1O	130
	$V_h = 6.3.$	$I_h = 0.2A.$	$V_a \text{ max.} = 25kV.$		$I_a \text{ max.} = 1.5mA.$		
COSSOR							
<i>Replacement Types</i>							
85A2	85	115	1	10	3	B7G	28
S130	120	180	6	75	5	B4	12
S130P	120	135§	5	75	7.5	B4	15
150C4	150	165	5	30	6	B7G	28
150B3	153	170	2	20	5	B7G	40

(Continued)

Valve Voltage Stabilizers

Type	Mean Stab. Volts	Striking Volts	Tube Current (mA)		Regulation (volts)	Base	
			Min.	Max.		Type	Ref.
EMITRON							
<i>Replacement Types</i>							
S130	120	180	6	75	5	B4	12
S130P	120	135§	5	75	7.5	B4	15
ENGLISH ELECTRIC							
<i>Obsolete Types</i>							
QS83/3	83	115	1	8	1.5	B7G	28
QS1204	108	133	5	25	3.0	B7G	28
<i>Current Types</i>							
OA2(QS1207)	150	185	5	30	6.0	B7G	28
OA2WA(QS1210)	150	165	5	30	5.0	B7G	28
(SQ)	75	105	5	40	6.5	IO	74
OA3(QS1205)	108	133	5	30	3.5	B7G	28
OB2(QS1208)	108	133	5	30	3.5	B7G	28
OB2WA(QS1211)	108	133	5	30	3.0	B7G	28
(SQ)	75	115	5	30	4.5	B7G	28
OC2	108	133	5	40	4.0	IO	74
OC3(QS1206)	150	180	5	40	5.5	IO	74
OD3(QS150/40)	75	110	2	20	6.0	B7G	70
QS75/20	75	117	5	60	5.0	B8B	64
QS75/60	92	140	1	10	5.0	B4	12
QS92/10	95	110	2	10	5.0	B7G	40
QS95/10	108	120	5	45	5.0	B8B	55
QS108/45	150	170	2	15	5.0	B7G	40
QS150/15	150	170	5	45	5.0	B8B	55
QS150/45	150	180	5	15	5.0	B7G	55
QS1200	75	110	2	15	4.5	B7G*	28
QS1201 (SQ)	108	133	2	15	3.0	B7G*	28
QS1202 (SQ)	150	180	2	15	4.5	B7G*	28
QS1203 (SQ)	85	115	1	10	4.0	B7G	28
QS1209/5651	85	115	1	10	4.0	B7G	28
QS1212 (SQ)	85	115	1	10	4.0	B7G*	28
QS1213 (SQ)	90	115	1	40	10	B7G	28
QS1215	280	420	5	35	4**	B5	15
STV280/40*	280	420	10	70	4**	B5	15
STV280/80*							
			* Flying leads.		** Per gap.		
FERRANTI							
<i>Current Types</i>							
KD21	75	105	5.0	40	4.5	IO	74
KD24	105	135	5.0	40	4.0	IO	74
KD25	150	180	5.0	40	5.5	IO	74
KD60	62	80	0.1	2.5	0.4	Caps	
KD61	62	80	0.1	2.5	0.4	Wires	
KD63	62	100	0.2	2.5	0.5	Wires	
G.E.C.							
<i>Obsolete Types</i>							
QS105/45	105	130†	5	45	5	B8B	55
S130	120	160	6	75	5	B4	12
S130P	120	135§	5	75	7.5	B4	15
ST11	100	140	1	8	5	B4	12
<i>Replacement Types</i>							
QS70/20	70	95	2	20	6	B7G	53
QS75/40	75	105	5	40	6.5	IO	74
QS83/3	83	130	1	5	—	B7G	52
QS95/10	95	110	2	10	5	B7G	40
QS108/45	108	120†	5	45	5	B8B	55
QS150/15	150	177	2	15	5	B7G	40
QS150/40	150	180	5	40	5.5	IO	74
QS150/45	150	170††	5	45	5	B8B	55
STV280/40*	280	420	5	35	—	B5	15
STV280/80*	280	420	10	70	—	B5	15

(Continued)

Valve Voltage Stabilizers

Type	Mean Stab. Volts	Striking Volts	Tube Current (mA)		Regulation (volts)	Base	
			Min.	Max.		Type	Ref.
MULLARD							
<i>Replacement Types</i>							
75B1	75	110	2	22	6	B7G	40
85A1§§	85	125	1	8	—	B8B	41
95A1	95	110	2	10	5	B7G	40
4687	100	130	10	40	6	Ct8	22
4687A	100	130	10	40	6	B4	12
7475	100	140	1	8	2	B4	12
13201A	100	135	15	200	5	B4	12
150C2	150	185	5	30	6	B7G	28
150B3	153	170	2	20	5	B7G	40
<i>Current Types</i>							
75C1	78	115	2	60	<5	B7G	55
M8225 (SQ)							
83A1§§	83	130	3.5	6.0	<1.1	B7G	55
85A2§§							
M8098§§ (SQ)	85	115	1	10	3	B7G	28
M8142§§ (SQ)							
M8190§§ (SQ) (85A3)							
90C1	90	115	1	40	14	B7G	28
M8206 (SQ)							
5c44	90	125	5	25	5	B8D	12
108C1							
M8224 (SQ)	108	133	5	30	3.5	B7G	28
150C4							
M8223 (SQ)	150	165	5	30	6	B7G	28
150B2							
M8163 (SQ)	150	180	5	15	5	B7G	55
M8208 (SQ)							
S.T.C.							
<i>Replacement Type</i>							
G120/1B	55	120	2	30	4.7	B4	12
<i>Current Types</i>							
G50/2G	50	90	0.3	3.0	3.5	Wires	
G55/1K	55	90	2	30	5	B7G	28
G75/3G	75	115	5	60	6.5	B8B	58
OC2	175	115	5	30	4.5	B7G	28
VR75/30	75	105	5	40	6.5	IO	74
OB2	108	127	5	30	3.5	B7G	28
VR105/30	108	127	5	40	4	IO	74
G300/1K	130-150	400	5	15	6	B7G	75
G180/2G	150	180	5	45	5	B8B	59
G180/2M	150	180	5	45	5	B8B	59
OA2	150	180	5	30	6	B7G	28
VR150/30	150	180	5	40	5.5	IO	74
G400/1K	306	400	2	4	3	B7G	62
G400/2G	306	400	2	4	3	B7G	62
TUNGSRAM							
<i>Current Types</i>							
VR105/30	105	135	5.0	40	4.0	IO	74
VR150/30	150	180	5.0	40	5.5	IO	74
AMERICAN							
<i>Current Types</i>							
OA3	75	105	5	40	—	IO	74
1B47	82	225	1	2	—	B7G	28
1C21	—	180	—	0.1	—	IO	108
OB3	90	125	5	40	—	IO	74
OC3	105	135	5	40	2	IO	74
OB2	108	133	5	30	—	B7G	28
OA2	150	155	5	30	—	B7G	28
OD3	150	185	5	40	4	IO	74

§ With primer taken to 190V through 50kΩ.

† With primer taken to 150V through 40kΩ.

†† With primer taken to 200V through 80kΩ.

††† With primer taken to 200V through 100kΩ.

‡ With primer taken to 150V through 250kΩ.

‡‡ With primer taken to 150V through 100kΩ.

‡‡‡ With primer taken to 240V through 250kΩ.

* Multi-gap types.

§§ Voltage reference tubes.

ZENER DIODES

Type	Nominal Zener Voltage (V)	Zener Current (mA)		Max. Dissipation (W)	Reverse Current		Dynamic Slope Resistance (Ω)	Connections
		Max.	Average		m μ A at -V			
A.E.I.								
<i>Current Types</i>								
VR35-A	3.5	1,260‡	—	5.5	—	—	20	Stud mounted.
VR35-B	3.5	520	—	2.25	—	—	20	Wire ended.
VR425-A	4.25	1,150‡	—	5.5	—	—	19	Stud mounted.
VR425-B	4.25	470	—	2.25	—	—	19	Wire ended.
VR475A	4.75	1,050‡	—	5.5	—	—	18	Stud mounted.
VR475B	4.75	430	—	2.25	—	—	18	Wire ended.
VR525A-A	5.25	970‡	—	5.5	—	—	17	Stud mounted.
VR525A-B	5.25	400	—	2.25	—	—	17	Wire ended.
VR525B-A	5.25	970‡	—	5.5	—	—	12	Stud mounted.
VR525B-B	5.25	400	—	2.25	—	—	12	Wire ended.
VR575A-A	5.75	900‡	—	5.5	—	—	10	Stud mounted.
VR575A-B	5.75	370	—	2.25	—	—	10	Wire ended.
VR575B-A	5.75	900‡	—	5.5	—	—	5	Stud mounted.
VR575B-B	5.75	370	—	2.25	—	—	5	Wire ended.
VR625-A	6.25	840‡	—	5.5	—	—	4	Stud mounted.
VR625-B	6.25	350	—	2.25	—	—	4	Wire ended.
VR7-A	7.0	690‡	—	5.5	—	—	4	Stud mounted.
VR7-B	7.0	280	—	2.25	—	—	4	Wire ended.
VR8-A	8.0	570‡	—	5.5	—	—	4	Stud mounted.
VR8-B	8.0	240	—	2.25	—	—	4	Wire ended.
VR9-A	9.0	520‡	—	5.5	—	—	4	Stud mounted.
VR9-B	9.0	220	—	2.25	—	—	4	Wire ended.
VR10-A	10.0	490‡	—	5.5	—	—	5	Stud mounted.
VR10-B	10.0	200	—	2.25	—	—	5	Wire ended.
VR11-A	11.0	440‡	—	5.5	—	—	8	Stud mounted.
VR11-B	11.0	180	—	2.25	—	—	8	Wire ended.
VR12-A	12.0	400‡	—	5.5	—	—	12	Stud mounted.
VR12-B	12.0	160	—	2.25	—	—	12	Wire ended.

‡ When mounted on a copper cooling fin 0.032in. thick by 1.75in. square.

NOTE 2.—Current for dynamic slope resistance is 20mA.

FERRANTI

Current Types

KS30A	3.3	110	—	0.15	1,000	0.5	110	} Wires. Single-ended.
KS30B	3.3	110	—	0.15	1,000	0.5	110	
KS31A	3.6	110	—	0.15	1,000	0.5	85	
KS32A	3.9	90	—	0.15	1,000	1.0	70	
KS32B	3.9	90	—	0.15	1,000	1.0	70	
KS33A	4.3	80	—	0.15	1,000	1.0	65	
KS34A	4.7	75	—	0.15	1,000	1.0	60	
KS34B	4.7	75	—	0.15	1,000	1.0	60	
KS35A	5.1	65	—	0.15	1,000	1.0	55	
KS36A	5.6	60	—	0.15	1,000	1.0	35	
KS36B	5.6	60	—	0.15	1,000	1.0	50	
KS37A	6.2	50	—	0.15	1,000	1.0	8	
KS38A	6.8	45	—	0.15	100	3.0	8	
KS38B	6.8	45	—	0.15	100	3.0	8	
KS39A	7.5	42	—	0.15	100	3.0	6	
KS40A	8.2	40	—	0.15	100	3.0	6	
KS40B	8.2	40	—	0.15	100	3.0	6	
KS41A	9.1	35	—	0.15	100	3.0	8	
KS42A	10.0	30	—	0.15	100	3.0	15	
KS42B	10.0	30	—	0.15	100	3.0	15	
KS43A	11.0	27	—	0.15	100	3.0	20	
KS44A	12.0	25	—	0.15	100	3.0	25	
KS44B	12.0	25	—	0.15	100	3.0	25	

NOTE 1.—Current for dynamic slope resistance and Zener voltage is 5mA.

G.E.C.

Current Types

SX47	4.7	—	—	0.3	200	2	80	} Cathode lead red.
SX51	5.1	—	—	0.3	100	2	70	
SX56	5.6	—	—	0.3	100	2	40	
SX62	6.2	—	—	0.3	50	2	30	

(Continued)

Zener Diodes

Type	Nominal Zener Voltage (V)	Zener Current (mA)		Max. Dissipation (W)	Reverse Current		Dynamic Slope Resistance ohms	Connections
		Max.	Average		μA at -V			

G.E.C. (Continued)

Current Types (Continued)

SX68	6.8	—	—	0.3	20	2	20	} Cathode lead red.
SX75	7.5	—	—	0.3	10	2	20	
SX82	8.2	—	—	0.3	5	2	30	
SZT1	5.6	—	—	0.3	150	2	80	
SZT2	5.6	—	—	0.3	100	2	55	

NOTE :—Current for dynamic slope resistance is 5mA.

MULLARD

Current Types

BZZ10	6.0	50	25	0.21	30	2.0	—	} Wires. Coloured band at positive end.
BZZ11	6.5	50	25	0.21	40	3.0	—	
BZZ12	7.2	50	25	0.21	30	3.0	—	
BZZ13	7.9	50	25	0.21	20	3.0	—	
OAZ200	4.7	100	50	0.26	250	2.0	—	
OAZ201	5.1	100	50	0.26	100	2.0	—	
OAZ202	5.7	100	50	0.26	30	2.0	—	} Wires. Positive lead adjacent to coloured dot.
OAZ203	6.2	100	50	0.26	40	3.0	—	
OAZ204	6.8	100	50	0.26	30	3.0	—	
OAZ205	7.5	100	50	0.26	20	3.0	—	
OAZ206	8.2	100	50	0.26	40	5.0	—	
OAZ207	9.1	100	50	0.26	30	5.0	—	
OAZ208	4.2	100	50	0.26	200	1.5	—	
OAZ209	5.2	100	50	0.26	100	2.0	—	
OAZ210	6.3	100	50	0.26	10	2.0	—	
OAZ211	7.6	100	50	0.26	20	3.0	—	
OAZ212	9.2	100	50	0.26	30	5.0	—	
OAZ213	12.2	100	50	0.26	25	5.0	—	

S.T.C.

Current Types

ZZA33F§	3.3	—	—	1.0	—	—	19.5	} Axial wire leads. Red and green sleeves, voltage tolerance ±5%.
ZZA36F§	3.6	—	—	1.0	—	—	17.5	
ZZA39F§	3.9	—	—	1.0	—	—	15.5	
ZZA43F§	4.3	—	—	1.0	—	—	13.5	
ZZA47F§	4.7	—	—	1.0	—	—	11.5	
ZZA51F§	5.1	—	—	1.0	—	—	9	
ZZA56F§	5.6	—	—	1.0	—	—	7	
ZZA62F§	6.2	—	—	1.0	—	—	4.5	
ZZA68F§	6.8	—	—	1.0	—	—	3	
ZZA75F§	7.5	—	—	1.0	—	—	2.8	
ZZA82F§	8.2	—	—	1.0	—	—	3.5	
ZZA91F§	9.1	—	—	1.0	—	—	5	
ZZA100F§	10	—	—	1.0	—	—	7	
ZZA110F§	11	—	—	—	—	—	9.5	
ZZA120F§	12	—	—	1.0	—	—	12.5	
ZZA130F§	13.2	—	—	1.0	—	—	15.5	
ZZA150F§	14.5	—	—	1.0	—	—	23	

NOTE :—Current for dynamic slope resistance is 20mA.

§ Made with 20% voltage tolerance when terminations are axial wire leads with red and blue sleeves.

‡ Made with 10% voltage tolerance when terminations are axial wire leads with red and yellow sleeves.

TEXAS

Current Types

1S5015	15	530	—	} 8 at stud temp. 50°C.	15,000	5.0	5.0	} Metal can, stud mounting. Anode to stud, cathode to tag. Addition of "C" to type number denotes cathode to stud, anode to tag. Addition of "R" denotes a symmetrical reversible unit.
1S5016	16	500	—		10,000	5.0	5.0	
1S5018	18	450	—		10,000	5.0	5.0	
1S5020	20	400	—		10,000	5.0	5.0	
1S5022	22	360	—		10,000	10	5.0	
1S5024	24	330	—		10,000	10	5.0	
1S5027	27	300	—		10,000	10	5.0	
1S5030	30	270	—		10,000	10	5.0	
1S5033	33	240	—		10,000	10	5.0	
1S5036	36	220	—		10,000	10	5.0	
1S5039	39	200	—		10,000	10	7.0	
1S5043	43	180	—		10,000	10	7.0	
1S5047	47	170	—		10,000	10	7.0	

(Continued)

Type	Nominal Zener Voltage (V)	Zener Current (mA)		Max. Dissipation (W)	Reverse Current		Dynamic Slope Resistance ohms	Connections
		Max.	Average		m μ A at -V			
TEXAS (Continued)								
<i>Current Types (Continued)</i>								
1S5051	51	160	—	8 at stud temp. 50°C	10,000	10	10	Metal can, stud mounting. Anode to stud, cathode to tag. Addition of "C" to type number denotes cathode to stud, anode to tag. Addition of "R" denotes a symmetrical reversible unit.
1S5056	56	140	—		10,000	10	10	
1S5062	62	130	—		10,000	10	10	
1S5068	68	120	—		10,000	10	15	
1S5075	75	110	—		10,000	10	15	
1S5082	82	100	—		10,000	10	15	
1S5091	91	88	—		10,000	10	20	
1S5100	100	80	—		10,000	10	20	
1S5110	110	73	—		10,000	10	20	
1S5120	120	66	—		10,000	10	25	
1S5130	130	62	—		10,000	10	25	
1S5150	150	53	—		10,000	10	25	
1S7033	3.3	120	—		300,000	2	20	
1S7036	3.6	110	—		200,000	2	20	
1S7039	3.9	100	—		100,000	2	18	
1S7043	4.3	90	—	60,000	2	15		
1S7047A (CV7099)	4.7	85	—	50,000	2	13		
1S7051A (CV7100)	5.1	75	—	30,000	2	10		
1S7056A (CV7101)	5.6	70	—	20,000	2	5		
1S7062A (CV7102)	6.2	65	—	0.4 at 25°C	5,000	2	2	Colour code at cathode end.
1S7068A (CV7103)	6.8	60	—	1,000	2	1		
1S7075A (CV7104)	7.5	55	—	1,000	2	1		
1S7082A (CV7105)	8.2	50	—	1,000	2	1		
1S7091	9.1	45	—	1,000	2	2		
1S7100	10.0	40	—	1,000	2	3		
1S7110	11.0	36	—	1,000	2	5		
1S7120	12.0	33	—	1,000	2	8		
1S7130	13.0	31	—	1,000	2	12		
1S7150A (CV7106)	15.0	27	—	1,000	2	20		

NOTE:—Current for dynamic slope resistance is 20mA.

THYRATRONS

Type	Heater		Max. Anode Volts	Max. Peak Current (mA)	Control Ratio	Valve Voltage Drop	Max. Frequency (c/s)*	Base	
	Volts	Amps						Type	Ref.
BRIMAR									
<i>Current Type</i>									
2D21	6.3	0.6	650	500	250	8	—	B7G	15
COSSOR									
<i>Replacement Types</i>									
GD14B	4.0	1.75	350	500	45	15-18	50,000	B5	9
GDT4C	4.0	1.75	350	1,000	40	15-18	10,000	B5	9
EDISWAN MAZDA									
<i>Obsolete Type</i>									
T31	4.0	1.5	400	500	20	40	20,000	B5	9
<i>Replacement Types</i>									
T41	4.0	1.5	400	500	20	40	20,000	MO	16
6K25	6.3	0.95	400	500	20	40	20,000	IO	20
<i>Current Types</i>									
20A2	6.3	1.0	650	1,250	300	9	—	IO	118
20A3	6.3	0.6	650	500	250	8	—	B7G	46
21A1	6.3	0.95	600	1,250	300	9	—	IO	126

(Continued)

Thyratrons

Type	Heater		Max. Anode Volts	Max. Peak Current (mA)	Control Ratio	Valve Voltage Drop	Max. Frequency (c/s)*	Base	
	Volts	Amps						Type	Ref.
ENGLISH ELECTRIC									
<i>Current Types</i>									
AFX203	2.5*	5.0	170	7,700	—	11	—	UX4	24
3D22A	6.3	2.6	650	8,000	—	10	—	UX7	16
6D4	6.3	0.25	350	110	—	18	—	B7G	24
AFX234	6.3	0.49	350	1,200	—	16	—	B7G	24
FERRANTI									
<i>Replacement Type</i>									
GK3	Cold cathode		140	20	—	73	—	B4	18
<i>Current Types</i>									
EN30	Cold cathode		380	250A	—	20	—	IO	124
GK10	Cold cathode		150	30	—	70	—	B7G	56
GK20	Cold cathode		230	30	—	130	—	B7G	56
GK32	Cold cathode		140	20	—	80	—	Caps	
GK33	Cold cathode		140	20	—	80	—	Wires	
GK40	Cold cathode		150	20	—	73	—	Caps	
GK41	Cold cathode		150	20	—	73	—	Wires	
GN10	Cold cathode		550	250A	—	20	—	IO	123
GN20	Cold cathode		420	250A	—	20	—	IO	123
3C23	2.5	7.0	1,250	6,000	—	16	—	UX4	20
GL1	2.5	7.0	1,250	6,000	—	16	—	IO	125
GL2	2.5	3.2	1,250	2,500	—	16	—	IO	132
G.E.C.									
<i>Current Types</i>									
GTIC	4.0	1.35	500	1,000	—	—	8,000	B5	1
GT3	6.3	0.85	500	300	—	—	—	IO	115
HIVAC									
<i>Replacement Type</i>									
XC13	Cold cathode		200	7.5	—	70	—	Wires	
<i>Current Types</i>									
XFG1	1.25	0.05	45	—	—	—	—	Wires	
XG2	6.3	0.150	500	100	200	10	200	B8D	10
XC18	Cold cathode		200	1.0	—	73	—	Wires	
XC23	Cold cathode		200	7.5	—	67.5	—	Wires	
XC24	Twin-trigger version of XC18								
XG3	Twin-grid version of XG2								
MULLARD									
<i>Obsolete Types</i>									
Z800U	Cold cathode		275	10	—	110	—	B9A	58
Z801U	Cold cathode		170	10	—	105	—	B9A	57
<i>Replacement Types</i>									
AN1	4.0	1.45	650	2,000	28	9	—	B5	1
EN31	6.3	1.3	1,000	750	35	33	150,000	IO	112
EN70	6.3	0.15	500	100	—	11	—	B8D	10
EN93	6.3	0.25	350	110	—	18	—	B7G	72
<i>Current Types</i>									
EN32	6.3	0.95	650	2,000	275	10	—	IO	126
EN91	6.3	0.6	650	500	250	8	500	B7G	51
EN92	6.3	0.15	350	100	—	10	—	B7G	46
Z300T/1267	Cold cathode		225	100	—	70	—	IO	108
Z700U	Cold cathode		310	16	—	116	—	Wires	
Z700W	Cold cathode		310	16	—	116	—	Wires	
Z701U	Cold cathode		165	12	—	62	—	B8D	—
Z803U	Cold cathode		290	50	—	105	—	B9A	51
Z900T	Cold cathode		200	100	—	62	—	B7G	71
Z804U	Cold cathode		400	125	—	112	—	B9A	59
S.T.C.									
<i>Replacement Types</i>									
4313C	Cold cathode		150	30	—	75	—	UX4	22
G1/236G	Cold cathode		235	1.5	—	70	—	Wires	

(Continued)

Thyratrons

Type	Heater		Max. Anode Volts	Max. Peak Current (mA)	Control Ratio	Valve Voltage Drop	Max. Frequency (c/s)*	Base	
	Volts	Amps						Type	Ref.
S.T.C. (Continued)									
<i>Current Types</i>									
2D21	6.3	0.6	650	500	250	8	—	B7G	51
3D22	6.3	2.6	650	8,000	150	10	—	B7G	73
G150/2D	Cold cathode		150	50	—	60	—	IO	141
G240/2D	Cold cathode		240	50	—	90	—	IO	141
G1/237G	Cold cathode		200	1.5	—	70	—	Wires	—
G1/371K	Cold cathode		360	15	—	180	—	B7G	—

AMERICAN

2B4	2.5	1.4	300	300	—	19	—	UX5	1
629	2.5	2.6	350	200	—	—	—	UX5	1
885	2.5	1.4	300	300	—	—	—	UX5	1
5696	6.3	0.15	500	100	250	10	—	B7G	46
6Q5	6.3	0.6	300	300	—	19	—	IO	20
884	6.3	0.6	300	300	—	—	—	IO	20

* For time-base use as a saw-tooth oscillator.

TELEVISION CATHODE-RAY TUBES

Type	Heater		kV (max.)		Final Anode Max. μ A*	Grid Volts (cut-off)	Defl. Angle (deg.)	Volts h-k (max.)	Capacitances (pF to earth)		Screen Diam. (in)	Remarks† IT, A, F, M, R, E	Base	
	Volts	Amps	Final Anode	First Anode					g	k			Type	Ref.
BRIMAR														
<i>Obsolete Types</i>														
C9A	2.0	1.4	6	—	150	-30	—	—	5	5	9	—	MO	24
C9B	2.0	2.5	8	—	150	-40 to -100	—	150	9	7	9	A	IO	112
C12A	2.0	1.4	6	—	150	-35	—	—	5	5	12	—	MO	24
C12D	2.0	2.5	7	—	150	-40 to -100	—	150	9	7	12	F	IO	112
C15B	2.0	2.5	14	—	150	-60 to -140	—	—	9	7	15	A	IO	112
C12E	6.3	0.6	8	—	150	-50	—	100	10	7	12	—	IO	112
<i>Replacement Types</i>														
C12B	2.0	2.5	12	—	150	-60 to -140	—	150	9	7	12	A, F	IO	112
C12FM	6.3	0.3	9	0.35	175	-40	63	150	7	5	12	IT, M	B12A	1
C14BM	6.3	0.6	14	—	250	-50 to -100	70	150	9	7	14††	A, M, R	B12A	5
C14PM	6.3	0.3	18	0.5	250	-33 to -77	70	180	9	6	14††	IT, E, A, M, R	B12A	11
C17BM	6.3	0.6	17.5	—	250	-50 to -100	70	150	9	7	17††	A, M, R	B12A	5
C17JM	6.3	0.6	17.5	0.41	250	-33 to -77	70	150	9	6	17††	A, M, E, R, IT	B12A	11
C17LM	6.3	0.3	18	0.5	250	-33 to -77	70	180	7	5	17††	E, A, M, R	B12A	11
C17PM	6.3	0.3	18	0.5	250	-33 to -77	70	180	9	6	17††	E, IT, A, M, R	B12A	11
C21NM	6.3	0.3	18	0.5	250	-53 to -105	70	180	7	7	21††	A, M, R, IT	B12A	10
C21HM	6.3	0.6	18	0.5	250	-33 to -77	70	180	9	6	21††	A, M, R, IT	B12A	9
C21SM	6.3	0.3	18	0.5	250	-33 to -77	90	180	7	5	21††	E, A, M, R	B12A	11
C21TM	12.6	0.3	20	0.5	250	-30 to -72	90	180	8.5	6.5	21††	IT, A, M, R	B12A	9
C14FM	12.6	0.3	14	0.41	250	-33 to -77	70	150	6	5	14††	A, M, R, IT	B12A	9
C17FM	12.6	0.3	17.5	0.41	250	-33 to -77	70	150	6	5	17††	A, M, R, IT	B12A	9
<i>Current Types</i>														
C17AF	4.0	0.3	17.6	0.75	250	-38 to -78	110	180	5	4	17††	A, M, R, E	B8H	2
C21AF	4.0	0.3	17.6	0.75	250	-38 to -78	110	180	5	4	21††	A, M, R, E	B8H	2
C23AG	4.0	0.3	17.6	0.75	250	-38 to -78	110	180	5	4	23††	A, M, R, E	B8H	2
C14LM	6.3	0.3	18	0.5	250	-33 to -77	70	180	7	5	14††	A, M, R, E	B12A	11
C17AA	6.3	0.3	17.6	0.5	250	-30 to -72	110	180	6	4	17††	IT, A, M, R, E	B8H	2
C17SM	6.3	0.3	18	0.5	250	-33 to -77	90	180	9	6	17††	E, A, M, R	B12A	11
C24KM	6.3	0.6	18	0.5	250	-33 to -77	70	180	9	6	24††	IT, A, M, R	B12A	9

CATHODEON

<i>Current Types</i>														
C12/1	6.3	0.3	10	0.41	350	-44 to -99	50	150	6	4	12	IT, M	B12A	1
C14/3	6.3	0.3	14	0.45	500	-40 to -80	70	150	8	6	14	IT, E, M, R	B12A	2
C17/1	6.3	0.3	16	0.41	350	-44 to -99	70	150	6	4	17	M, R, IT	B12A	1
C17/1A	6.3	0.3	16	0.41	350	-44 to -99	70	150	6	4	17	A, M, R, IT	B12A	1

(Continued)

Television Cathode-Ray Tubes

Type	Heater		kV (max.)		Final Anode Max. μA^*	Grid Volts (cut-off)	Defl. Angle (deg.)	Volts h-k (max.)	Capacitances (pF to earth)		Screen Diam. (in)	Remarks† IT, A, F, M, R, E	Base	
	Volts	Amps	Final Anode	First Anode					g	k			Type	Ref.
CATHODEON (Continued)														
<i>Current Types (Continued)</i>														
C17/4A	6.3	0.3	16	0.41	350	-44 to -99	90	150	6	4	17	A, M, R, IT	B12A	1
C17/5A	6.3	0.3	16	0.45	500	-40 to -80	90	150	8	6	17††	IT, A, E, M, R	B12A	2
C17/7A	6.3	0.3	16	0.45	850	-30 to -72	110	150	8	6	17††	A, E, M, R	B8H	1
C19/7A	6.3	0.3	16	0.5	850	-30 to -72	110	150	8	6	19††	A, E, M, R	B8H	1
C21/1A	6.3	0.3	18	0.41	350	-44 to -99	90	150	6	4	21	A, M, R, IT	B12A	1
C21/7A	6.3	0.3	18	0.5	850	-30 to -72	110	150	8	6	21††	A, E, M, R	B8H	1
C23/7A	6.3	0.3	18	0.5	850	-30 to -72	110	150	8	6	23††	A, E, M, R	B8H	1
C27/1A	6.3	0.3	20	0.41	350	-44 to -99	90	150	6	4	27	A, M, R, IT	B12A	1
C27/5A	6.3	0.6	18	0.45	500	-40 to -80	90	150	8	6	27††	IT, A, E, M, R	B12A	2
C36/24	6.3	0.3	14	0.41	350	-44 to -99	70	150	6	4	14	M, R, IT	B12A	1
C14/13A	10.0	0.18	10	0.18	500	-30 to -50	70	150	8	6	14††	IT, A, E, M, R	B12A	2
COSSOR														
<i>Obsolete Types</i>														
65K/2	4.0	1.1	7	—	100	-50 max.	39	50	8.0	—	15	IT	B4E	1
75K	6.3	0.55	7	—	100	-80 max.	48	200	6.0	—	10	IT	B4E	1
85K	6.3	0.55	10	—	100	-50 max.	48	200	9.0	—	15	IT	B4E	1
108K	6.3	0.55	9	—	100	-50 max.	48	200	9.0	—	10	IT	B4E	1
121K	6.3	0.3	9	—	100	-50 max.	52	150	10.0	5	12	IT	B12A	1
141K	6.3	0.3	14	—	150	-40	70	150	6.5	5.5	14†	IT, R	B12A	1
171K	6.3	0.3	14	—	150	-40	70	150	6.5	5.5	17††	IT, R	B12A	1
172K	6.3	0.3	16	—	150	-60	70	150	8.0	6	17††	IT, R	B12A	10
<i>Replacement Types</i>														
MW31-74	6.3	0.3	9	0.41	100	-44 to -99	50.5	200	6	4	12	IT, M	B12A	1
MW36-44	6.3	0.3	14	0.41†	100	-33 to -72	65	200	7	5	14††	IT, M, R	B12A	10
<i>Current Types</i>														
AW43-80	6.3	0.3	16	0.5	100	-40 to -80	85	200	7	4	17††	IT, A, M, R, E	B12A	17
AW43-88	6.3	0.3	16	0.65	—	-38 to -94	110	200	6	4	17††	A, M, R, E	B8H	1
AW53-88	6.3	0.3	16	0.65	—	-38 to -94	110	200	7	5	21††	A, M, R, E	B8H	1
MW43-69	6.3	0.3	16	0.41†	150	-40 to -86	65	100	8	6	17††	IT, A, M, R	B12A	10
MW53-80	6.3	0.3	18	0.5†	—	-40 to -80	85	200	7	5	21††	IT, A, M, R	B12A	10
EDISWAN MAZDA														
<i>Obsolete Types</i>														
CRM71	2.0	1.3	4.0	—	100	-35	—	—	5	5	7	—	MO	24
CRM91	2.0	1.3	6.0	—	100	-54	64	—	5	5	9	—	MO	24
CRM92	2.0	1.3	7	—	100	-56	57	—	5.2	5.4	9	—	MO	24
CRM92A	2.0	1.3	7	—	100	-56	57	—	5.2	5.4	9	—	MO	24
CRM121	2.0	1.3	7	—	100	-56	57	—	5.2	5.4	12	—	MO	24
CRM121A	2.0	1.3	7.5	—	100	-60	57	—	5.2	5.4	12	—	MO	24
CRM121B	2.0	1.3	10	—	100	-79	57	—	5.2	5.4	12	—	MO	24
CRM123	2.0	1.3	10	—	100	-79	57	—	5.2	5.4	12	A	MO	24
CRM152A	2.0	1.3	13.0	—	100	-101	67	—	5.2	5.4	15	A	B12A	5
CRM122	7.3	0.3	7.5	—	100	-60	57	200	5.2	5.4	12	—	MO	24
<i>Replacement Types</i>														
CRM151	2.0	1.3	13	—	100	-101	51	—	5.2	5.4	15	A	MO	24
CRM152B	2.0	1.3	13	—	100	-101	67	—	5.2	5.4	15	A	B12A	5
CRM153	12.6	0.3	15	0.4	100	-51	67	—	8.5	6.5	15	IT, A, M	B12A	1
CRM141	12.6	0.3	14	0.4	100	-51	67	180	8.5	6.5	13.5	IT, A	B12A	1
CRM142	12.6	0.3	14	0.4	100	-51	67	180	8.5	6.5	13.5	IT, A	B12A	1
CRM143	12.6	0.3	14	0.4	100	-51	70	180	8.5	6.5	14††	IT, A, R	B12A	1
CRM171	12.6	0.3	16	0.4	100	-51	70	180	8.5	6.5	17††	IT, A, R	B12A	1
CRM211	12.6	0.3	18	0.4	100	-51	70	180	8.5	6.5	21††	IT, A, M, R	B12A	1
<i>Current Types</i>														
CME1706J	6.3	0.3	16‡	0.4	100	-51	110	180	7	4.5	17††	A, M, R, E	B8H	1
CME2103	6.3	0.3	16‡	0.4	100	-51	110	180	7	4.5	21††	A, M, R, E	B8H	1
CME141	12.6	0.3	14‡	0.4	100	-51	70	180	8.5	6.5	14††	IT, A, M, R, E	B12A	2
CME1402	12.6	0.3	14‡	0.4	100	-51	90	180	7.5	6.5	14††	IT, A, M, R, E	B12A	2
CME1702	12.6	0.3	16‡	0.4	100	-51	90	180	9.0	6.5	17††	A, M, R, E	B12A	2
CME1703	12.6	0.3	16‡	0.4	100	-51	110	180	6	4.5	17††	A, M, R, E	B8H	1
CME1705	12.6	0.3	16	0.5	100	-51	110	180	8	4.5	17††	A, M, R, E	B8H	1
CME1901	12.6	0.3	17‡	0.5	100	-55	114	180	6.5	4.5	19††	A, M, R, E	B8H	2
CME2101	12.6	0.3	16‡	0.4	100	-51	110	180	6	4.5	21††	A, M, R, E	B8H	1
CME2104	12.6	0.3	18	0.5	100	-51	110	180	8	4.5	21††	A, M, R, E	B8H	2
CME2301	12.6	0.3	17‡	0.5	100	-55	110	180	6.5	4.5	23††	A, M, R, E	B8H	1
CRM93	12.6	0.3	9	0.4	100	-51	57	180	8.5	6.5	9	IT, A	B12A	1

(Continued)

Television Cathode-Ray Tubes

Type	Heater		kV (max.)		Final Anode Max. μ A*	Grid Volts (cut-off)	Defl. Angle (deg.)	Volts h-k (max.)	Capacitances (pF to earth)		Screen Diam. (in)	Remarks† IT, A, F, M, R, E	Base	
	Volts	Amps	Final Anode	First Anode					g	k			Type	Ref.
EDISWAN MADZA (Continued)														
<i>Current Types (Continued)</i>														
CRM124	12.6	0.3	10	0.4	100	-51	57	180	8.5	6.5	12	IT, A, M	B12A	1
CRM144	12.6	0.3	14	0.4	100	-51	70	180	8.5	6.5	14††	IT, A, M, R	B12A	1
CRM172	12.6	0.3	16	0.4	100	-51	70	180	8.5	6.5	17††	IT, A, M, R	B12A	1
CRM173	12.6	0.3	16	0.4	100	-51	90	180	7.5	6.5	17††	IT, A, M, R	B12A	1
CRM212	12.6	0.3	20	0.4	100	-51	90	180	8.5	6.5	21††	IT, A, M, R	B12A	1

§ Maximum third anode voltage = 700V.

EMISCOPE

<i>Obsolete Types</i>														
3/3	4.0	1.3	3.5	—	—	-32	—	—	9	7.5	9	—	Special	
3/4	4.0	1.3	4.0	—	—	-32	—	—	9	7.5	10	A	"	
3/5	4.0	1.3	4.0	—	—	-34	—	—	9	7.5	14	—	"	
3/6A	4.0	1.3	4.0	—	—	-34	—	—	9	7.5	15	A	"	
6/7	4.0	1.3	7.0	1.1	—	-25	—	—	10	7.5	12	—	"	
4/13	8.0	0.3	15.0	0.4	300	-40	70	200	15	6.0	21	A	B7B	1
5/2	8.0	0.3	17.0	0.6	—	-33 to -77	70	200	15	6.0	14	A, R	B7B	3
5/3	8.0	0.3	17.0	0.6	—	-33 to -77	70	200	15	6.0	17	A, R	B7B	3
3/20	11.5	0.3	5.5	—	—	-35	—	—	10	6.0	10	—	B4E	1
<i>Replacement Types</i>														
3/1	4.0	1.3	2.7	—	—	-25	—	—	10	7.5	5	—	Special	
3/2	4.0	1.3	2.7	—	—	-30	—	—	9	7.5	7	—	"	
6/5	4.0	1.3	5.0	0.9	—	-20	—	—	9	—	9	—	"	
6/6	4.0	1.3	5.0	0.9	—	-20	—	—	9	—	12	—	"	
<i>Current Types</i>														
TA10	4.0	1.0	7.0	0.25	—	-34	—	—	12	6.0	10	A	B7B	1
TA15	4.0	1.0	7.0	0.25	—	-34	—	—	12	6.0	15	A	B7B	1
SE14/70	6.3	0.3	18.0	0.5	250	-90	70	180	9	6.0	14††	IT, A, M, R, E	B12A	11
SE17/70	6.3	0.3	18.0	0.5	250	-90	70	180	9	6.0	17††	IT, A, M, R, E	B12A	11
3/32	8.0	0.3	9	—	—	-20	—	—	10	6.0	15	A	B7B	2
3/16	8.0	0.3	7.0	—	—	-34	—	—	10	6.0	10	A	B7B	2
3/18	8.0	0.3	7	—	300	-34	50	200	10	6.0	12	A	B7B	2
3/31	8.0	0.3	9.0	—	150	-20	50	200	10	6.0	12	A	B7B	2
4/14T	8.0	0.3	17.0	0.4	400	-50	70	200	15	6.0	14	A, R	B7B	1
4/15T	8.0	0.3	17.0	0.4	400	-50	70	200	15	6.0	17	A, R	B7B	1
4/14TG	8.0	0.3	17.0	0.4	400	-50	70	200	15	6.0	14	A, R, M	B7B	1
4/15TG	8.0	0.3	17.0	0.4	400	-50	70	200	15	6.0	17	A, R, M	B7B	1
5/2T	8.5	0.3	17.0	0.6	—	-60	70	200	15	6.0	14	A, R, M, E	B7B	3
5/3T	8.5	0.3	17.0	0.6	—	-60	70	200	15	6.0	17	A, R, M, E	B7B	3

EMITRON

<i>Obsolete Types</i>														
12XP4	6.3	0.3	9	0.41	150	-60	60	150	6	5	12	IT, M	B12A	9
14KP4A	6.3	0.3	14	0.41	150	-60	70	150	6.5	5.5	14††	IT, M, R	B12A	9
17ASP4	6.3	0.3	14	0.41	150	-60	70	150	6.5	5.5	17††	IT, M, R	B12A	9
85K	6.3	0.55	10	—	100	-50	52	50	9	9	15	IT	B4E	1
108K	6.3	0.55	9	—	100	-50	50	200	9	9	10	IT	B4E	1
<i>Replacement Type</i>														
15EP4	6.3	0.3	10	0.41	150	-60	52	150	6.5	5.5	15	IT, M	B12A	9
<i>Current Types</i>														
12XP4A	6.4	0.3	9	0.41	50	-60	60	200	6	5	12	IT, M	B12A	9
14LP4	6.3	0.3	14	0.41	150	-60	70	200	6.5	5.5	14††	IT, M, R	B12A	9
17AXP4	6.3	0.3	14	0.41	150	-60	70	200	6.5	5.5	17††	IT, M, R	B12A	9

ENGLISH ELECTRIC

<i>Obsolete Types</i>														
T900	6.3	0.6	14	0.41	—	-33 to -77	53	125	6.5	5	16	IT	B12A	4
T901A	6.3	0.3	14	0.41	—	-33 to -77	70	200	6	5	16	IT	B12A	4
T908	6.3	0.3	16	0.41	—	-33 to -77	70	200	6	5	17††	IT, M, R	B12A	1
T909A	6.3	0.3	16	0.41	—	-33 to -77	70	200	9	15	21	IT	B12A	4
T914	6.3	0.3	16	0.41	—	-33 to -77	70	200	6	5	17††	IT, M, R	B12A	9
T915	6.3	0.3	16	0.41	—	-33 to -77	70	200	9	15	21	IT	B12A	4

FERRANTI

<i>Obsolete Types</i>														
T9/2	4.0	1.0	6	—	200	-50	48	50	10	10	9	—	IO	112
T12/2	4.0	1.0	7	—	200	-55	48	50	10	10	12	—	IO	112

(Continued)

Type	Heater		kV (max.)		Final Anode Max. μA^*	Grid Volts (cut-off)	Defl. Angle (deg.)	Volts h-k (max.)	Capacitances (μF to earth)		Screen Diam. (in)	Remarks† IT, A, F, M, R, E	Base	
	Volts	Amps	Final Anode	First Anode					g	k			Type	Ref.
G.E.C. (Continued)														
<i>Current Types (Continued)</i>														
7205A	12.6	0.3	14‡	0.4	100	-51	85	180	8.5	6.5	14††	IT, A, M, R, E	B12A	19
7405A	12.6	0.3	16‡	0.4	100	-51	110	180	6	4.5	17††	A, M, R, E	B8H	1
7502A	12.6	0.3	20	0.4	100	-51	85	180	8.5	6.5	21††	IT, A, M, R	B12A	4
7503A	12.6	0.3	16‡	0.4	100	-51	110	180	6	4.5	21††	A, M, R, E	B8H	1
7504A	12.6	0.3	18	0.5	100	-51	110	180	8	4.5	21††	A, M, R, E	B8H	1

‡ Maximum third anode voltage 700V.

MULLARD*Obsolete Types*

MW22-7	6.6	0.6	7	0.4	100	-40	51	150	10	5	9	—	B8B	53
MW22-14	6.3	0.3	9	0.35	100	-40 to -99	51	150	>10	>5	9	M	B8B	53
MW22-14C	6.3	0.3	9	0.35	100	-44 to -99	51	150	>10	>5	9	—	B8B	53
MW22-17	6.3	0.3	9	0.41	100	-44 to -99	51	200	6	4	9	—	B12A	1
MW22-18	6.3	0.3	9	0.41	100	-44 to -99	51	200	6	4	9	M	B12A	1
MW31-7	6.3	0.6	7	0.3	100	-40	50.5	150	10	5	12	—	B8B	53
MW31-14C	6.3	0.3	9	0.35	100	-44 to -99	50.5	150	>10	>5	12	M	B8B	53
MW31-14	6.3	0.3	9	0.35	100	-44 to -99	50.5	150	>10	>5	12	—	B8B	53
MW31-16	6.3	0.3	9	0.14	100	-44 to -99	50.5	200	6	4	12	IT, M	B12A	1
MW31-17	6.3	0.3	9	0.41	100	-44 to -99	50.5	200	6	4	12	—	B12A	1
MW31-18	6.3	0.3	9	0.41	100	-44 to -99	50.5	200	6	4	12	M	B12A	1
MW31-20	6.3	0.3	11	0.35	100	-44 to -99	50.5	150	>10	>10	12	A	B8B	53
MW31-21	6.3	0.3	11	0.35	100	-44 to -99	50.5	150	>10	>10	12	A, M	B8B	53
MW31-22	6.3	0.3	11	0.35	100	-44 to -99	50.5	150	>10	>10	12	A	B12A	1
MW31-23	6.3	0.3	11	0.35	100	-44 to -99	50.5	150	>10	>10	12	A, M	B12A	1
MW36-22	6.3	0.3	14	0.41	100	-33 to -72	65	200	6	4	14††	IT, R, M	B12A	1
MW36-24	6.3	0.3	14	0.41	100	-33 to -72	65	200	6	4	14††	IT, M, R	B12A	1
MW43-64	6.3	0.3	16	0.41‡	100	-40 to -86	65	200	>8	>6	17††	IT, R, M	B12A	10

Replacement Types

AW36-20	6.3	0.3	14	0.41	100	-40 to -80	65	200	>8	>6	14††	IT, A, M, R, E	B12A	17
AW36-21	6.3	0.3	14	0.41	100	-40 to -80	65	200	>8	>6	14††	IT, M, R, E	B12A	17
MW6-2	6.3	0.3	25	—	150	-40 to -90	30.5	125	6.3	6.3	2.5	A, M	side contact	
MW22-16	6.3	0.3	9	0.41	100	-44 to -99	50.5	200	6	4	9	IT, M	B12A	1
MW31-74	6.3	0.3	9	0.41	100	-44 to -99	50.5	200	6	4	12	IT, M	B12A	1
MW36-44	6.3	0.3	14	0.41‡	100	-33 to -72	65	200	7	5	14††	IT, M, R	B12A	10
MW41-1	6.3	0.3	14	0.41	100	-39 to -86	56	200	6	4	16	IT, F	B12A	1
MW43-43	6.3	0.3	14	0.41	100	-43 to -77	66	200	>8	>6	17††	IT, R	B12A	10
MW53-20	6.3	0.3	18	0.5‡	—	-40 to -80	65	200	>7	>5	21††	IT, A, M, R	B12A	10

Current Types

AW36-80	6.3	0.3	14	0.5	100	-40 to -80	85	200	7	4	14††	IT, A, M, R, E	B12A	17
AW43-80	6.3	0.3	16	0.5	100	-40 to -80	85	200	7	4	17††	IT, A, M, R, E	B12A	17
AW43-88	6.3	0.3	16	0.5	—	-38 to -94	110	200	6	4	17††	A, M, R, E	B8H	1
AW43-89	6.3	0.3	16	0.7	—	-35 to -75	110	200	7	5	17††	A, M, R, E	B8H	2
AW53-80	6.3	0.3	16	0.5	100	-40 to -80	85	200	7	4	21††	IT, A, M, R, E	B12A	17
AW53-88	6.3	0.3	16	0.5	—	-38 to -94	110	200	6	4	21††	A, M, R, E	B8H	1
AW53-89	6.3	0.3	16	0.7	—	-35 to -75	110	200	6	4	21††	A, M, R, E	B8H	2
MW43-69	6.3	0.3	16	0.41‡	100	-40 to -86	65	100	>8	>6	17††	IT, A, M, R	B12A	10
MW43-80	6.3	0.3	16	0.41	100	-40 to -86	85	200	>8	>5	17††	IT, A, M, R	B12A	10
MW53-80	6.3	0.3	18	0.5‡	—	-40 to -80	85	200	7	5	21††	IT, A, M, R	B12A	10

20th CENTURY*Current Types*

M5R-321	6.3	0.5	10	—	100	-60	50	100	9.5	6.5	5††	A, E, F, R	B12A	7
M6S-303	6.3	0.5	10	—	100	-60	50	100	9.5	6.5	6††	A, E, F, S	B12A	7
M60-302	6.3	0.5	15	—	100	-90	45	100	8	6.5	6	A, E, F	B12A	7
M6S-312	6.3	0.5	15	—	100	-90	45	100	8	8	6	A, F	B12A	5

† IT = ion trap; A = aluminizing; E = electrostatic focusing; F = flat screen; M = external conducting coating; R = rectangular screen

* For highlights. †† Diagonal. ‡ Second anode 0V. S = Square screen. $V_{as} = +200V$ (focus).

EFFICIENCY DIODES

(For television line scan)

Type	Heater		Peak Inverse Volts*	Peak Anode Current (mA)	Max. Rect. Current (mA)	Peak Cathode Potential		Capacitance (pF) h-k	Base	
	Volts	Amps				h(-) to k*	h(+) to k		Type	Ref.
BRIMAR										
<i>Obsolete Type</i>										
25U4GT	25.0	0.3	3,850	660	138	3,850	385	6.5	IO	109
<i>Replacement Types</i>										
6U4	6.3	1.2	3,850	660	138	3,850	110	8.5	IO	109
PY81/17Z3	17.0	0.3	4,500	450	150	4,500	3,000	3.6	B9A	34
<i>Current Types</i>										
EY83	6.3	1.0	5,000	500	175	5,000	—	2.1	B9A	34
PY83	20.0	0.3	Other data as Type EY83							
COSSOR										
<i>Current Type</i>										
PY81	17.0	0.3	4,500	450	150	4,500	3,000	3.6	B9A	34
EDISWAN MAZDA										
<i>Replacement Types</i>										
U281	28.0	0.2	3,000	600	120	1,000	—	12.5	IO	55
U282	28.0	0.2	4,500	600	120	1,000	—	12.5	IO	121
U301	28.0	0.2	4,500	600	120	4,500	—	—	IO	128
U403	40.0	0.2	1,500	—	—	—	—	11	MO	18
U801	80.0	0.2	1,500	—	—	—	—	14	IO	117
<i>Current Types</i>										
U191	19.0	0.3	5,000	600	120	5,000	—	—	IO	128
U193	19.0	0.3	5,500	450	150	5,500	—	7.9	B9A	34
U251	25.0	0.3	7,000	720	120	7,500	—	3.2	B9A	34
EMITRON										
<i>Obsolete Type</i>										
PY80/19X3	19.0	0.3	4,000	400	180	650	—	—	B9A	18
FERRANTI										
<i>Current Types</i>										
PY83	20.0	0.3	5,000	500	175	5,600	—	9.2	B9A	34
PY88	30.0	0.3	6,000	550	220	6,600	—	2.0	B9A	34
G.E.C.										
<i>Replacement Types</i>										
PY81	17.0	0.3	4,750	450	150	4,500	—	3.6	B9A	34
PY80/U309	19.0	0.3	4,000	1,000	170	700	—	—	B9A	18
U329	25.0	0.3	7,000	720	120	7,500	—	3.2	B9A	34
<i>Current Type</i>										
U339	19.0	0.3	4,500	—	150	—	—	—	IO	128
MARCONI										
<i>Obsolete Type</i>										
U152	19.0	0.3	4,000	400	180	650	160	—	B9A	18
<i>Current Types</i>										
PY81/U153	17.0	0.3	4,750	450	150	4,500	3,000	3.6	B9A	34
PY80/U309	19.0	0.3	4,000	1,000	180	700	—	—	B9A	18
U329	25.0	0.3	7,500	720	120	7,500	—	3.2	B9A	34
MULLARD										
<i>Replacement Types</i>										
PY31	17.0	0.3	1,500	—	125	300	—	—	IO	55
PY80	19.0	0.3	4,000	400	180	650	—	—	B9A	18
PZ30	52.0	0.3	1,500**	—	200	650	—	—	IO	52
<i>Current Types</i>										
PY81	17.0	0.3	4,750	450	150	4,750	—	2.8	B9A	34
PY88	30.0	0.3	6,600	550	220	6,600	—	2.0	B9A	34

** Anode connected to Pin 5.

(Continued)

Type	Heater		Peak Inverse Volts*	Peak Anode Current (mA)	Max. Rect. Current (mA)	Peak Cathode Potential		Capacitance (pF) h-k	Base	
	Volts	Amps				h(-) to k*	h(+) to k		Type	Rei.
TUNGSRAM										
<i>Current Type</i>										
17Z3	17.0	0.3	4,500	450	150	4,300	—	3.6	B9A	34

WESTINGHOUSE*Current Type*

14D19	—	—	320	unlimited	—	—	—	—	Metal rectifier	
14D24	—	—	400							
14D28	—	—	480							
14D36	—	—	640							
14D134	—	—	1,260							
14D148	—	—	560							

* For 10 μ sec. pulse duration.

OSCILLOSCOPE, RADAR AND OTHER SPECIAL-PURPOSE C - R TUBES

(Directory of Manufacturers)

A.E.I.

Associated Electrical Industries Limited
Industrial Valve and Cathode Ray Tube Department
Radio and Electronic Components Division
155 Charing Cross Road
London, W.C.2
Telephone: Gerrard 8660

E.T.E.L.

Electronic Tubes Ltd.
Kingsmead Works
Fassetts Road
Loudwater
High Wycombe
Bucks.
Telephone: High Wycombe 2020

BRIMAR LIMITED

Footscray
Sidcup
Kent
Telephone: Footscray 3333

FERRANTI LIMITED

Gem Mill
Chadderton
Oldham
Lancs.
Telephone: Main 6661

CATHODEON ELECTRONIC LIMITED

Bircham Road
Southend-on-Sea
Telephone: Southend-on-Sea 68451

G.E.C.

The M-O Valve Company Limited
Brook Green
Hammersmith
London, W.6
Telephone: Riverside 3431

COSSOR INSTRUMENTS LIMITED

Cossor House
Highbury Grove
London, N.5
Telephone: Canonbury 1234

MULLARD LIMITED

Mullard House
Torrington Place
London, W.C.1
Telephone: Langham 6633

ENGLISH ELECTRIC VALVE COMPANY LIMITED

Chelmsford
Essex
Telephone: Chelmsford 3491

20th CENTURY ELECTRONICS LIMITED

Centronics Works
King Henry's Drive
New Addington
Croydon
Surrey
Telephone: Lodge Hill 2121-6

EXPLANATION OF VALVE-BASE CONNECTIONS

The following pages of valve-base diagrams show all the sets of base connections that are necessary to cover the valves listed in the tables of characteristics. They are grouped into sections according to the base designations (B7G, B8A, B9A, etc.), and within a section each diagram has a code number to the bottom right of it which identifies that particular set of connections.

Thus to find the base connections of a valve listed in the tables, it is first of all necessary to look up the designation in the "Base Type" column, which gives the right section of diagrams, and then the number in the "Base Ref." column, which gives the code number of a particular diagram in that section. For example, to obtain the connections of the 6F33 valve, one would have to turn to the section of diagrams headed "B7G" and then look for diagram No. 21.

British and American bases which are not interchangeable are given their standard designations. American bases which are interchangeable with British are in some cases given the British designations. Thus, B7G is used to cover both British and American miniature 7-pin bases and B9A for the British 9-pin and the American Noval. The term International Octal (IO) is used to cover both the British B8-O designation and the American standard Octal.

The designation B8B is now out of date; however, it is used here to cover the British B8G base and the American Octal and Lock-in types. None of these is identical but the differences are so slight that all will fit the same valveholder. The differences are concerned chiefly with minor points about the spigot material, spigot taper and so on.

Three British bases are given arbitrary designations because there are no standard ones short enough. They are the small 4- and 5-pin (Sm4 and Sm5) bases fitted to some hearing-aid valves and the side-contact base (Ct8) of continental origin and now obsolete.

Care must be taken to distinguish between the IO and MO bases, particularly as the latter is sometimes called the British Octal and is now designated B8-MO. The two differ in pin spacing and in spigot size and are *not* interchangeable. The MO is used by one manufacturer only and has the larger diameter spigot of the two.

The abbreviations used for the connections are substantially in accordance with British Standards Specification BS1409. Some additional abbreviations, however, have had to be introduced.

Similar electrodes which operate in turn on the same electron stream are numbered in order from the cathode, the numbers being appended as subscripts to the electrode symbols.

Similar electrode systems in multiple valves are distinguished by a single tick (') for the first electrode system, by a double tick (") for the second, and so on, the ticks being appended to the appropriate electrode symbols.

Dissimilar electrode systems in multiple valves are distinguished by additional letter subscripts appended to the symbols for the less complex electrode structures.

A number against a pin indicates that it is joined internally to the pin of that number.

Where more than one electrode is joined internally to the same pin only the electrode of major importance is usually designated. Thus, the suppressor grid of a pentode is not always shown when it is joined internally to cathode or filament negative. An exception is made when it may be important to the user to know precisely which electrodes are joined together.

No distinction is normally made between valves with and without external metal screens. The base connections show an "M" for such a screen in cases where all or only some valves have it, but others with the same code reference may have no such screen or an internal screen. The "M" pin should, therefore, normally be earthed.

Some valves have the suffix "Met" to their numbers and are listed separately; but generally they are equivalent to the valves without such a suffix.

Abbreviations

for Valve-base Connections









MAIN SYMBOLS

a	= anode
bp	= beam plates
ce	= control electrode
f	= filament
g	= grid
h	= heater
ic	= internal connection (external connections must not be made to a pin so designated)
jp	= jumper
k	= cathode
M	= external conducting coating
m	= internal conducting coating
p	= priming electrode
r	= resistance
s	= internal shield
st	= spark trap
t	= target
tr	= trigger
TC	= top cap
SC	= side cap


SUBSCRIPT SYMBOLS

d	= diode
p	= pentode
r	= rectifier
t	= triode
tap	= filament or heater tapping
(+)	= positive
(-)	= negative


B 4

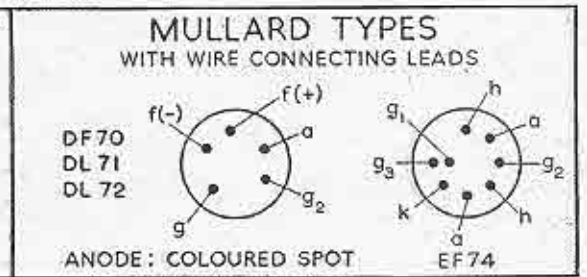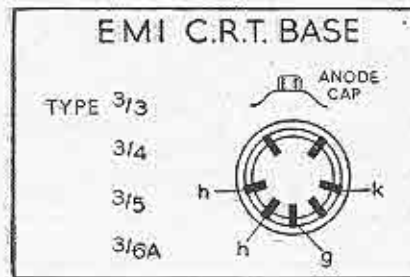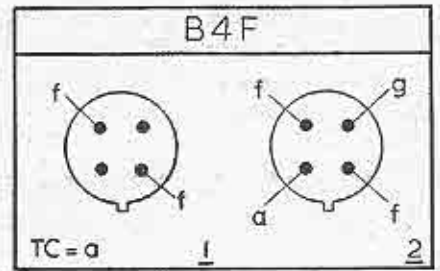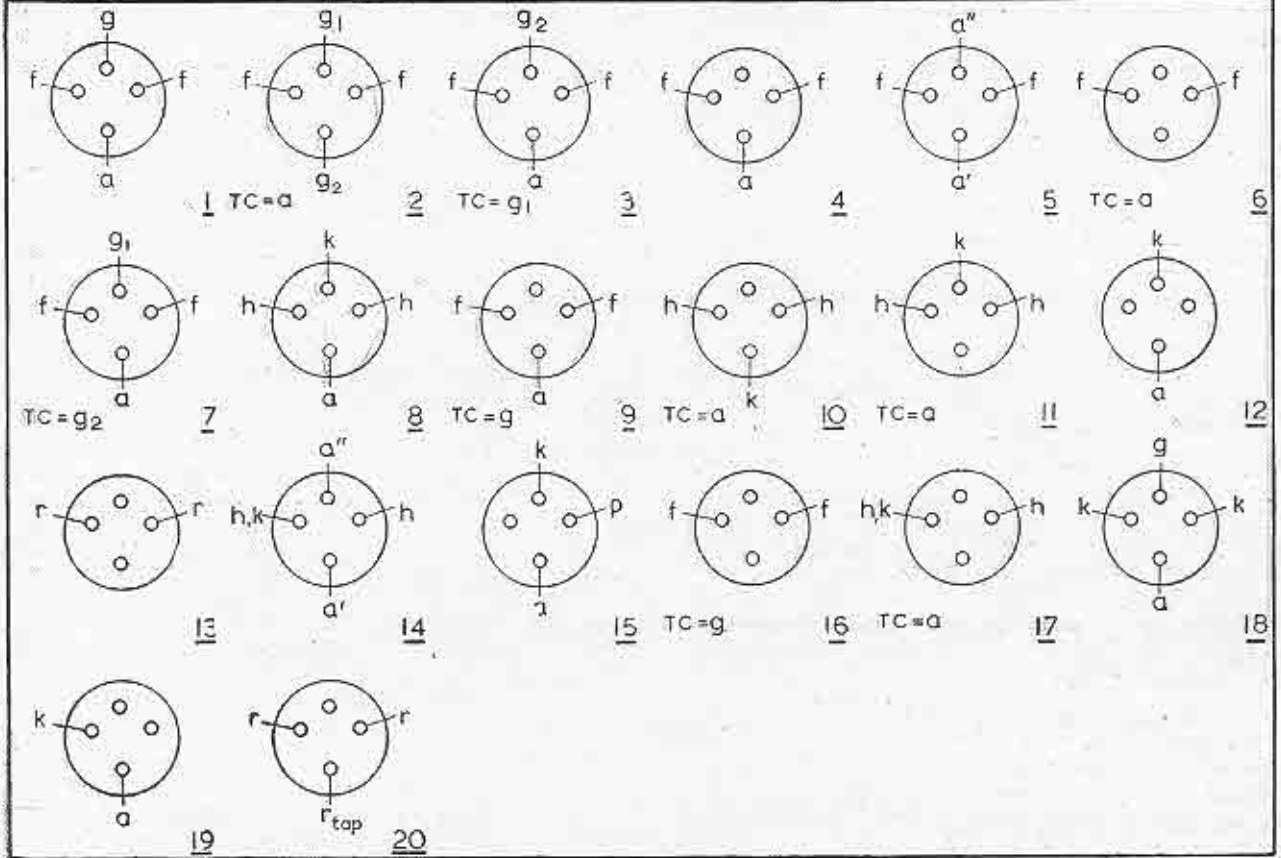


B5

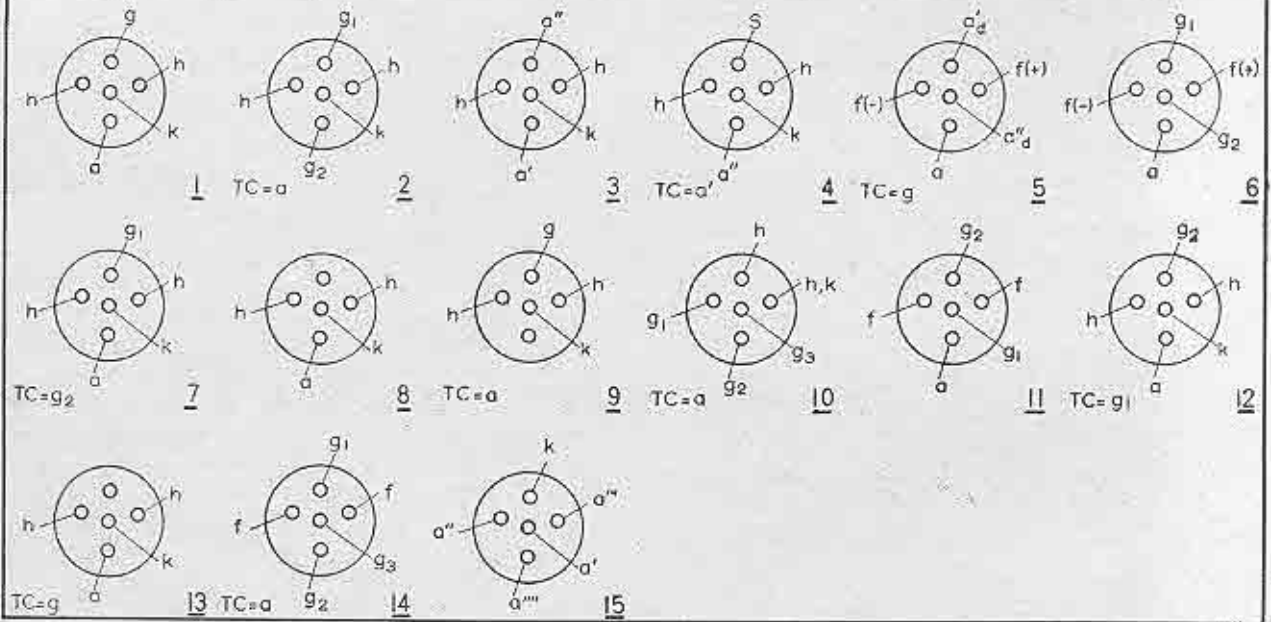


B5A

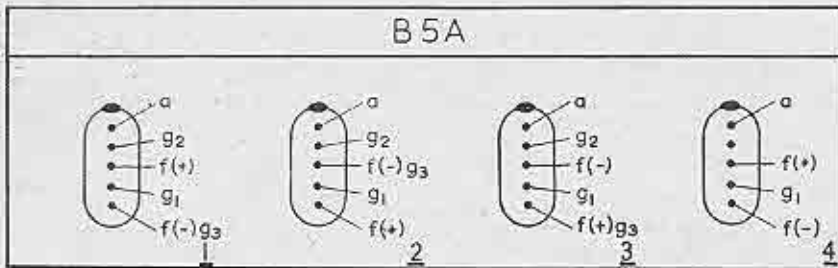


B5B




B7

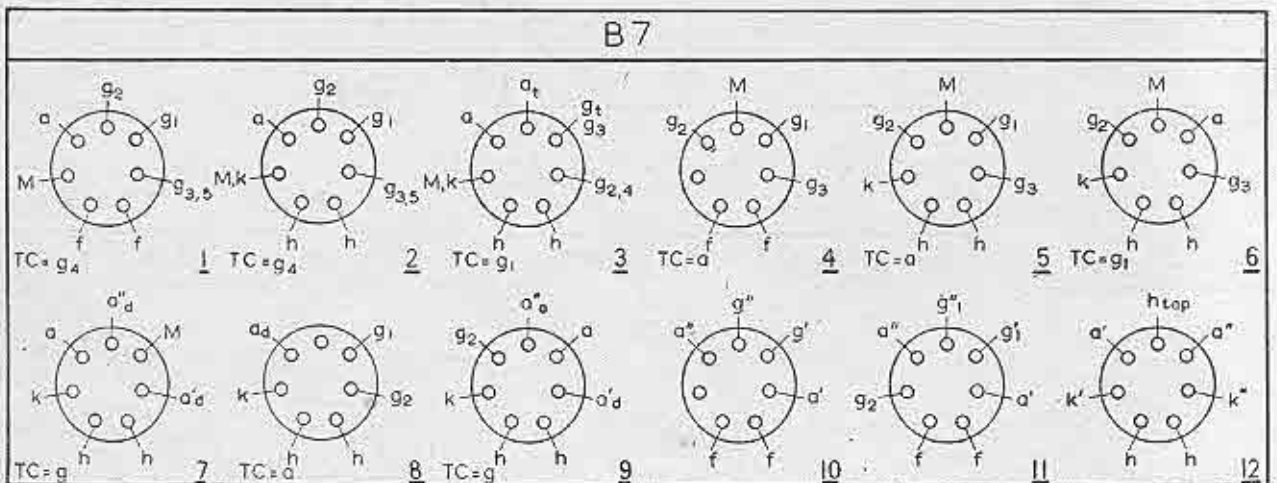


B 7 (Continued)

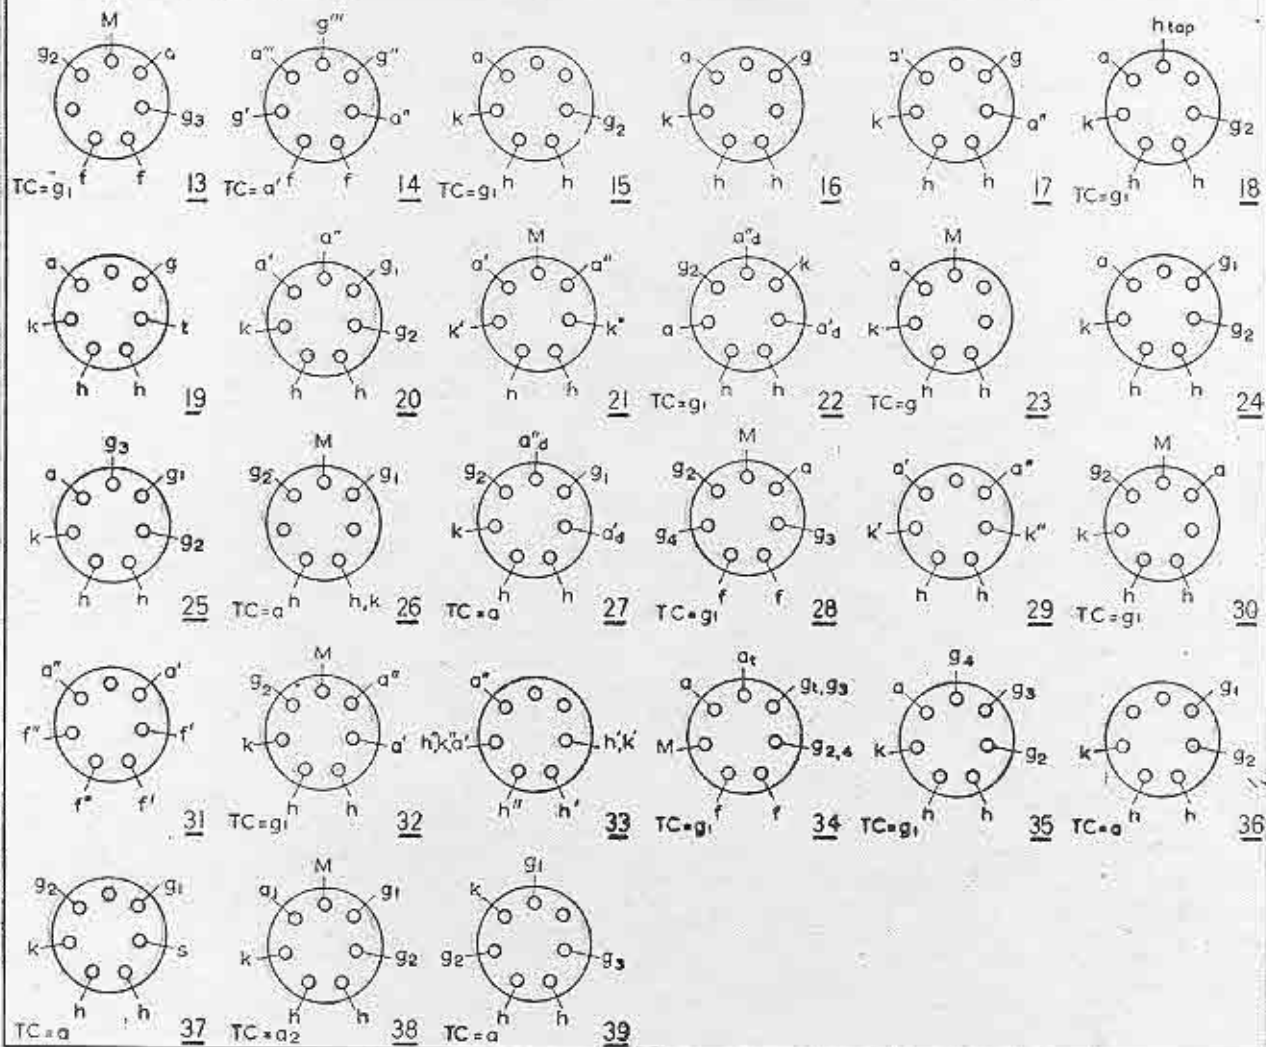


B7A

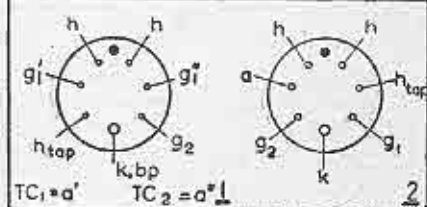


B7B

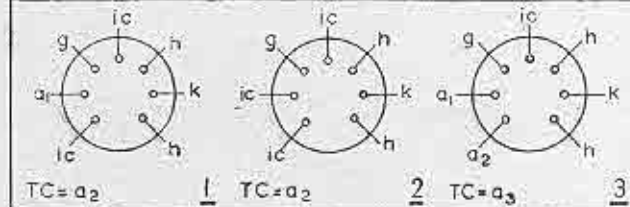


B7G

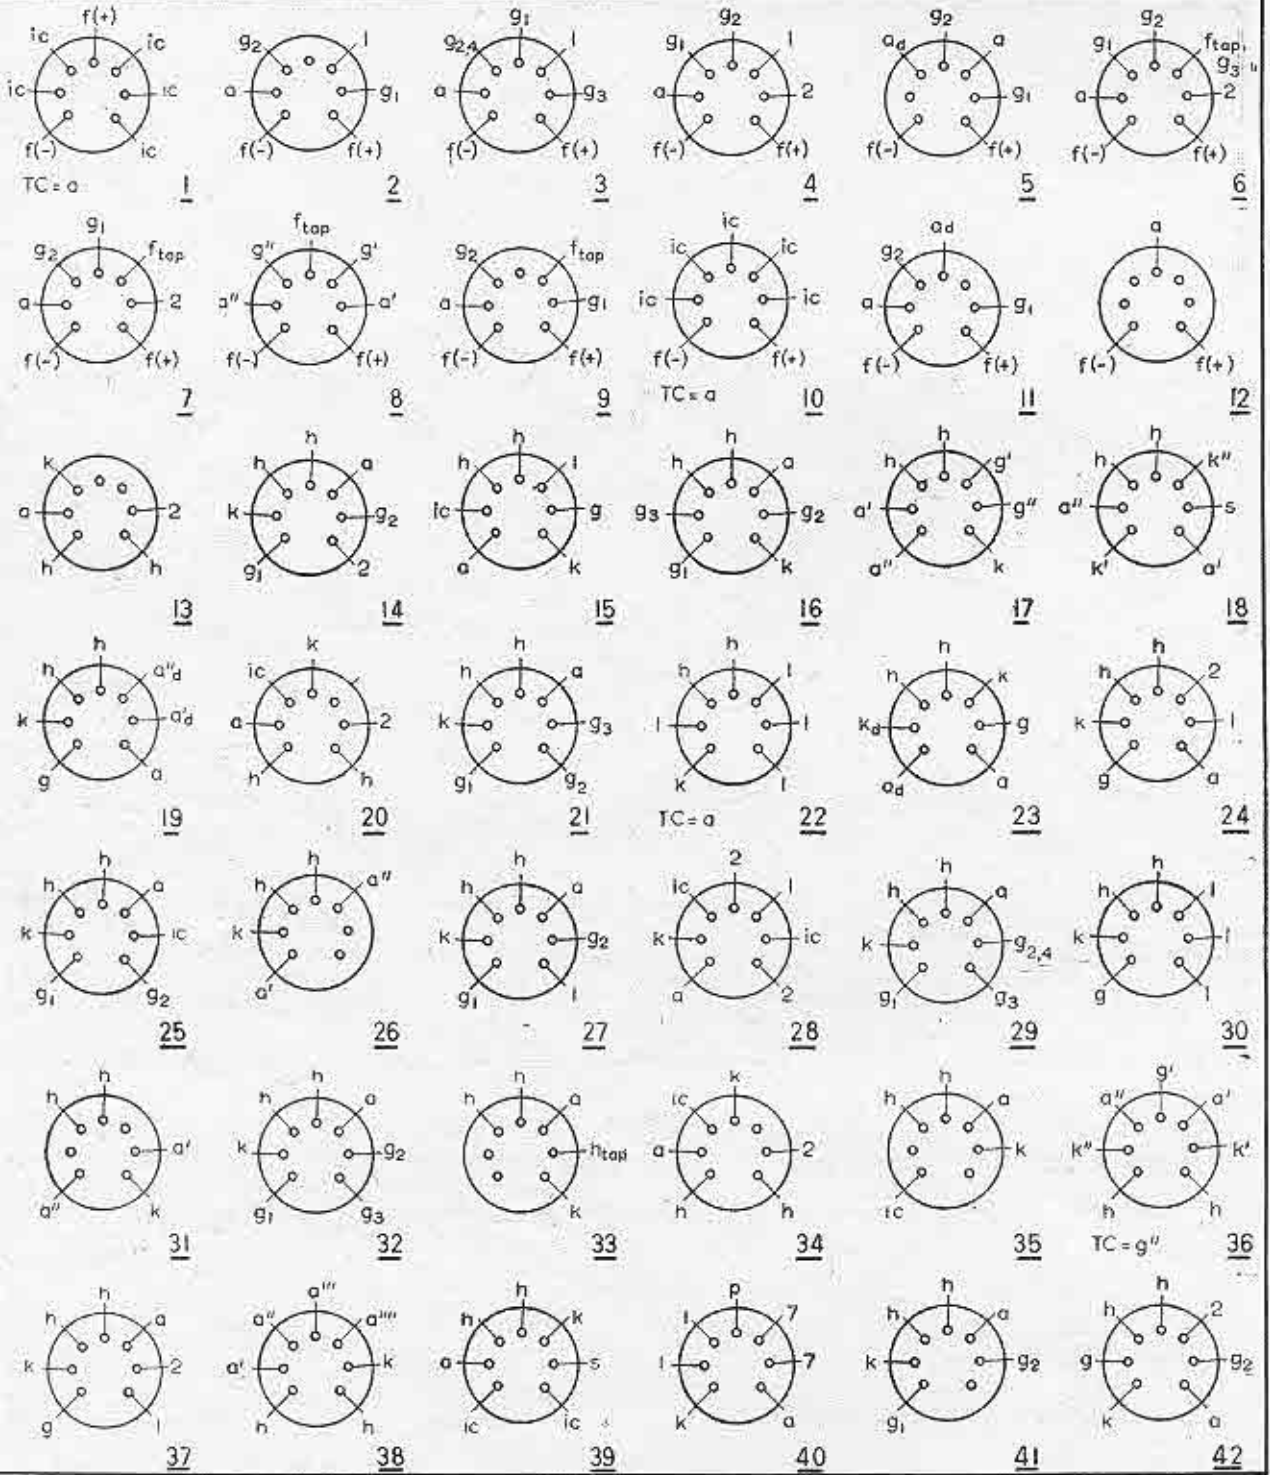


B7G (Continued)



43 TC = a''




44




45




46




47




48




49




50




51




52




53




54




55




56




57




58




59



60




61




62




63




64




65




66




67




68




69



70




71




72




73




74




75




76




77




78



79




80




81


B 8 A

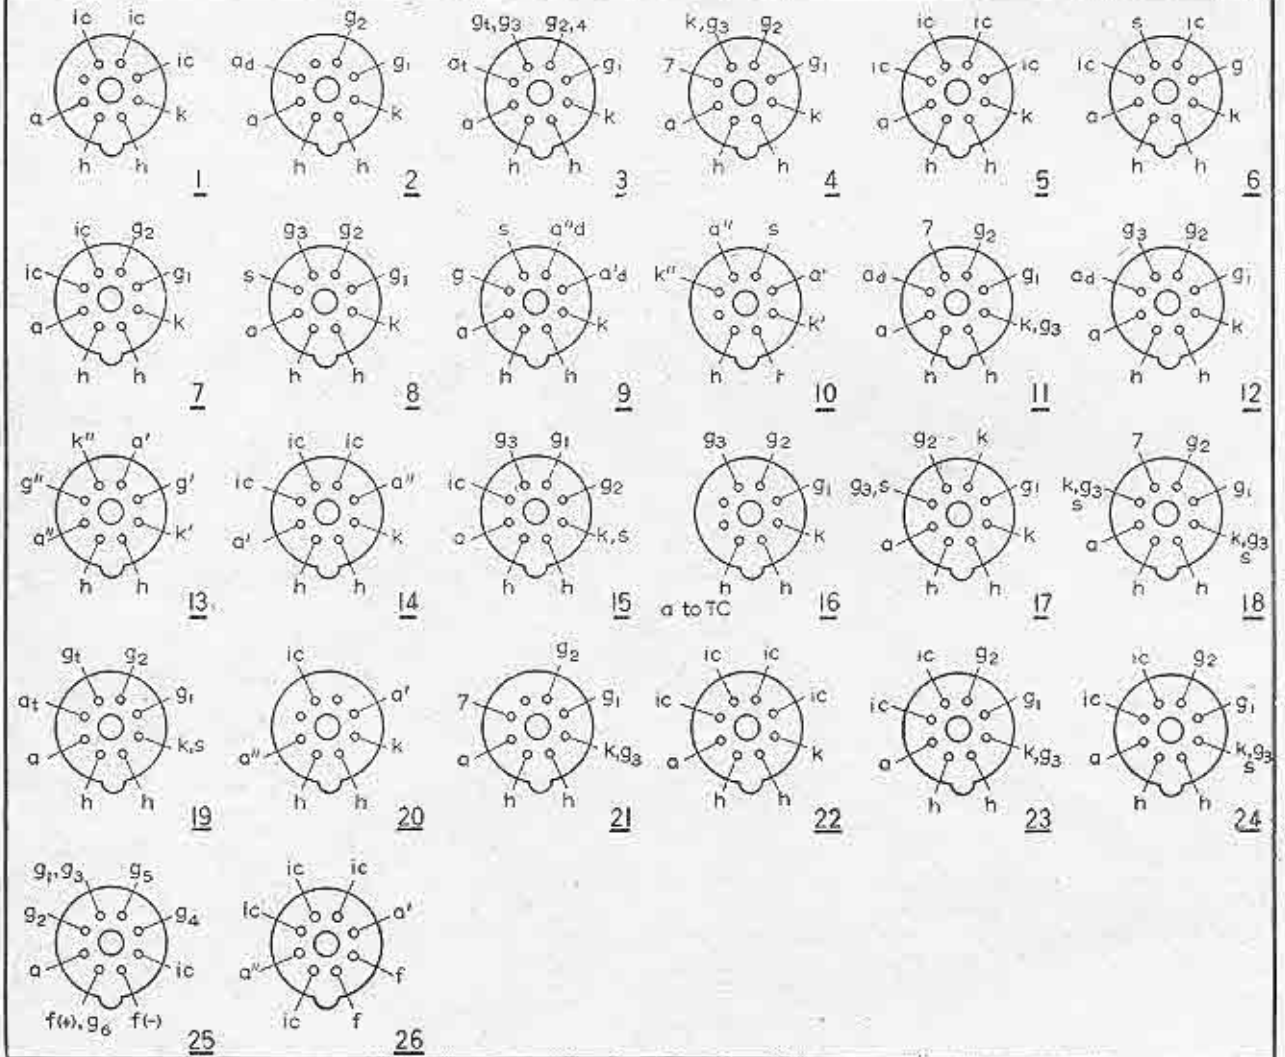

B 8 B (LOCTAL)

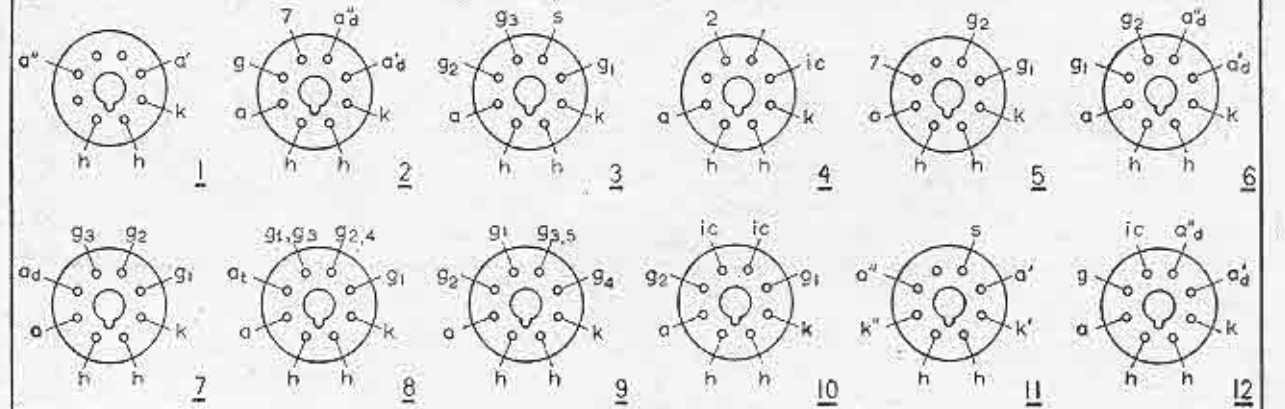


B8B (Continued)

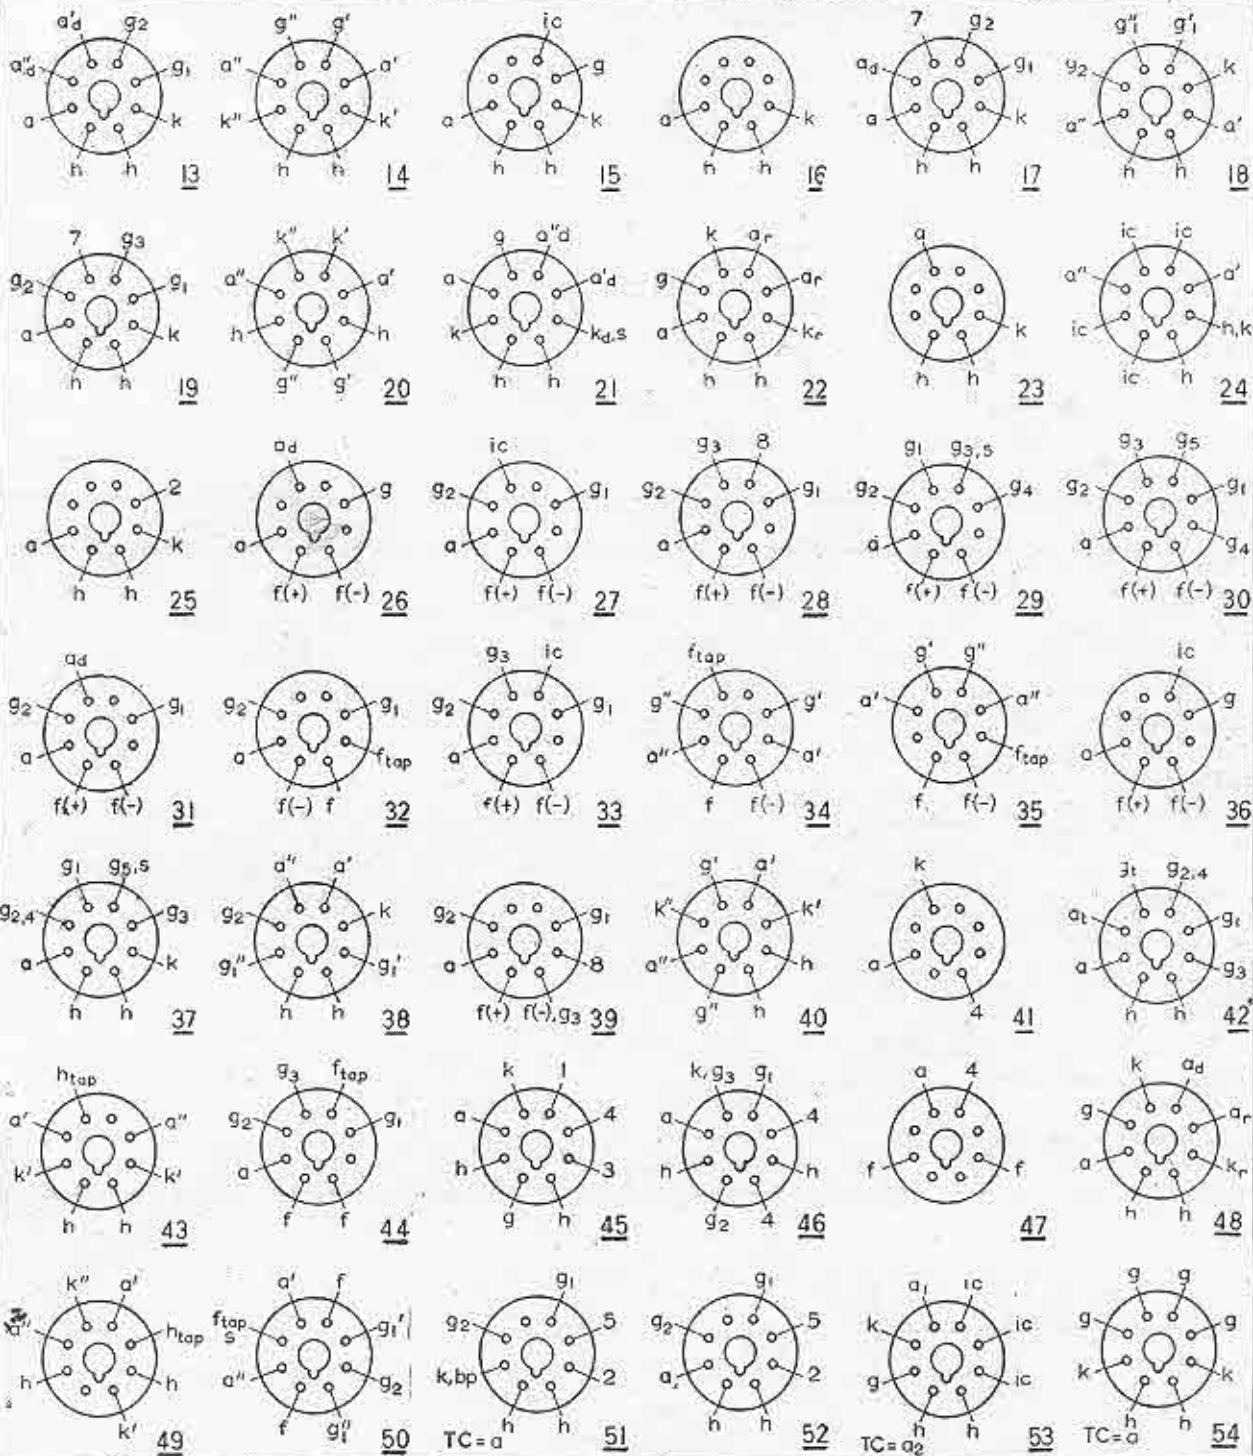


*k and g₅ to centre: spigot


B8B (Continued)

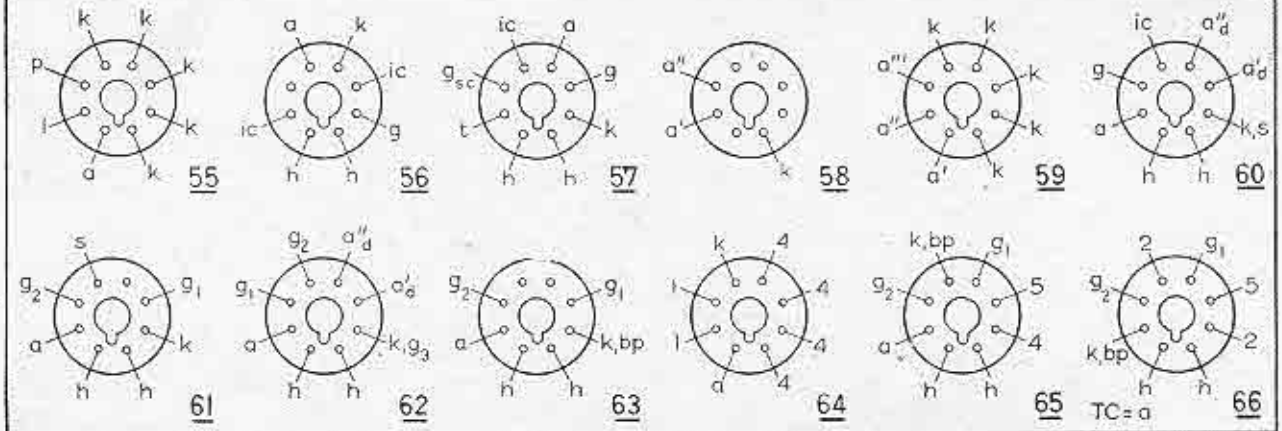


B8D

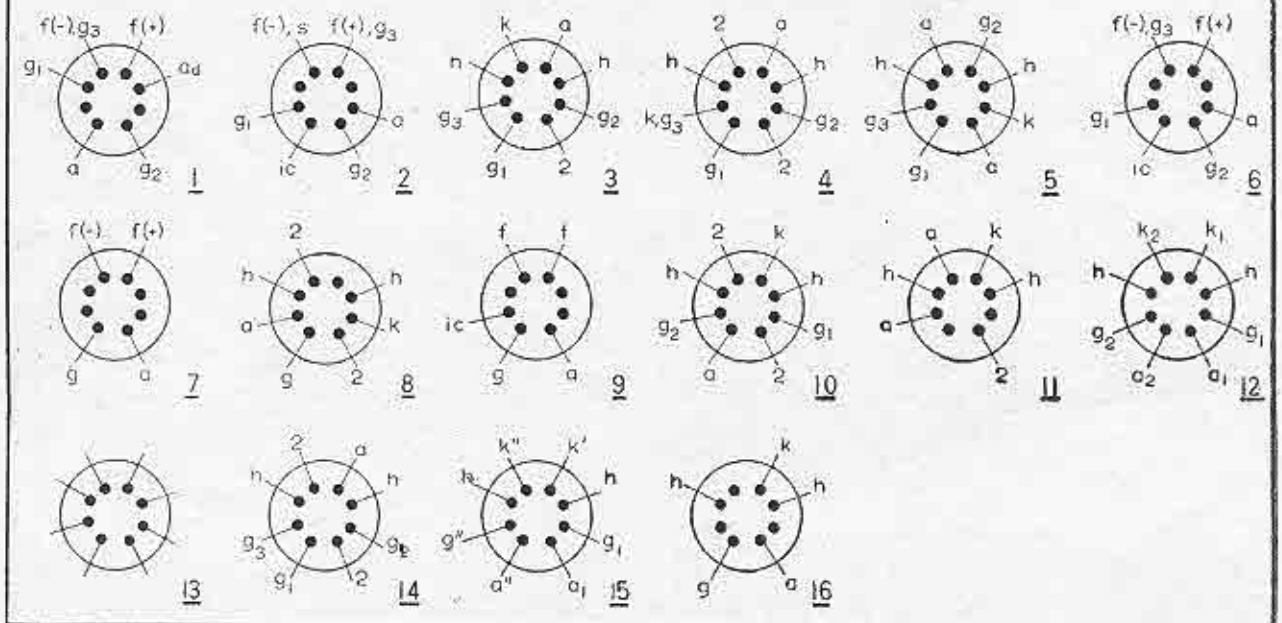


B8H

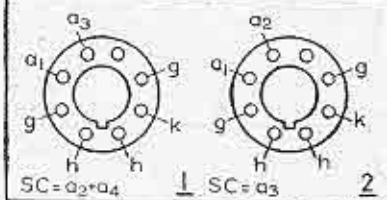


10 (INTERNATIONAL OCTAL)

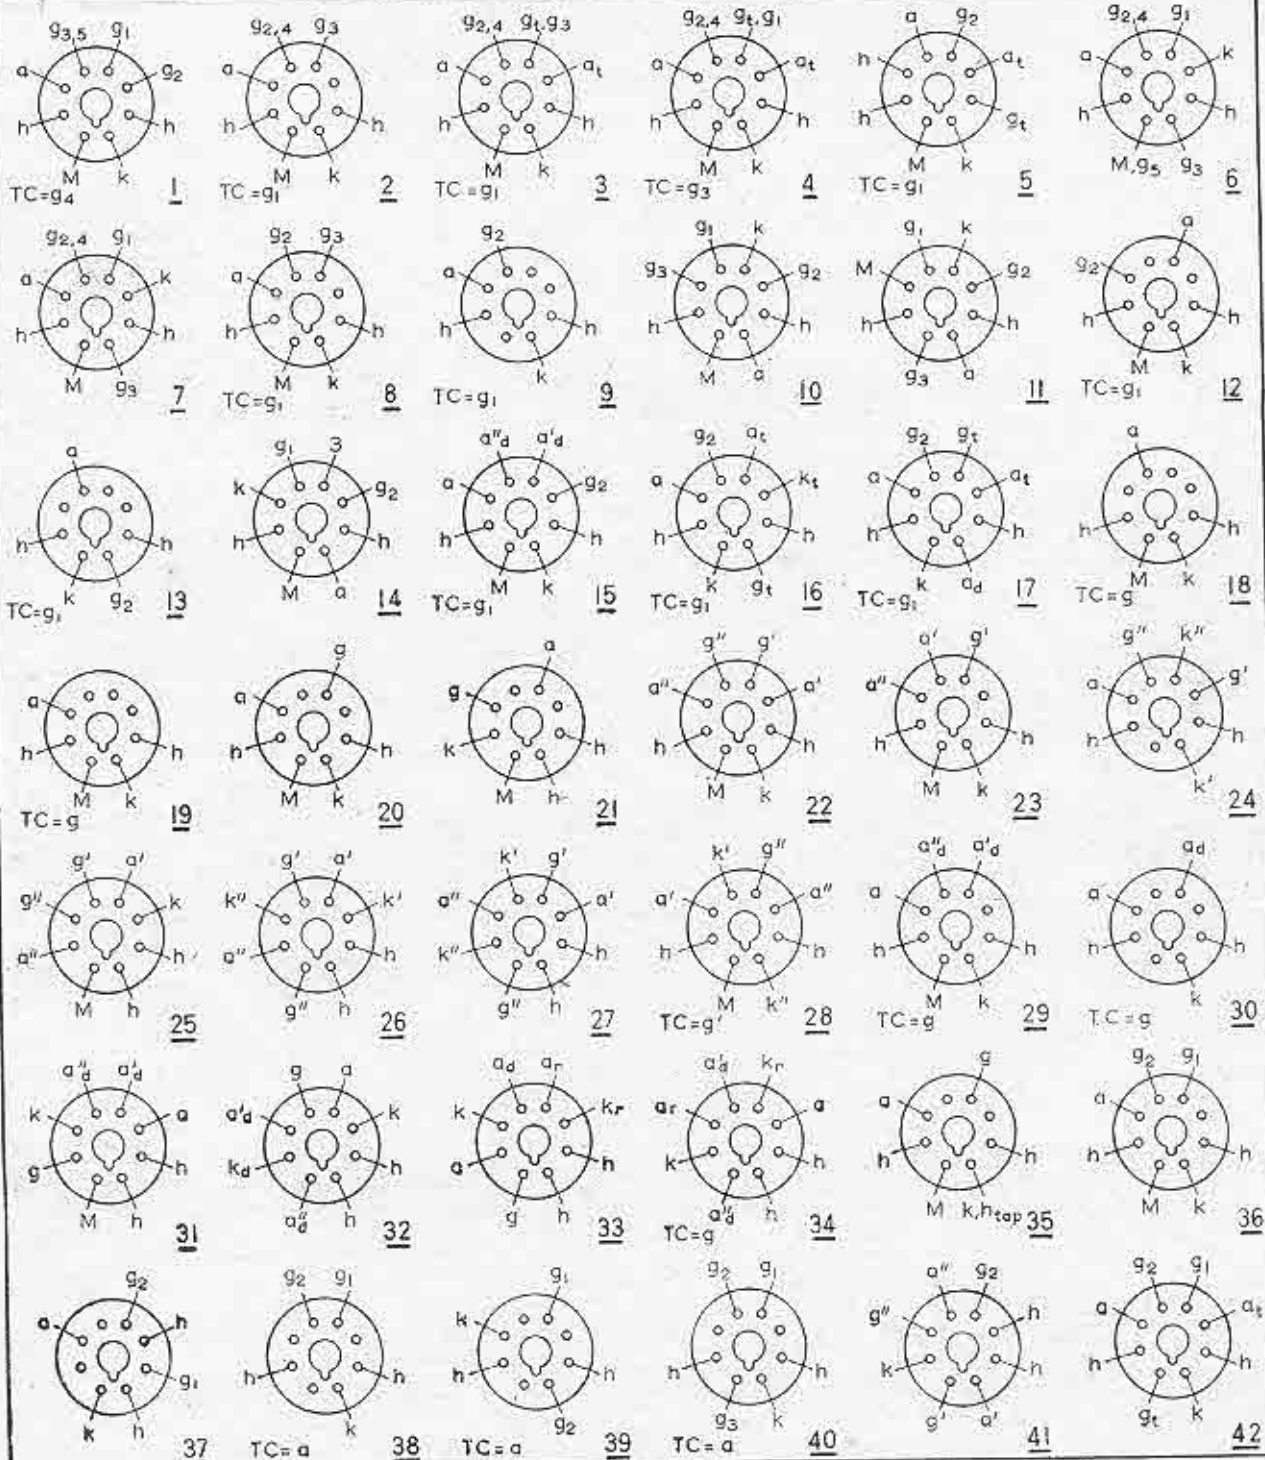

| O (Continued)

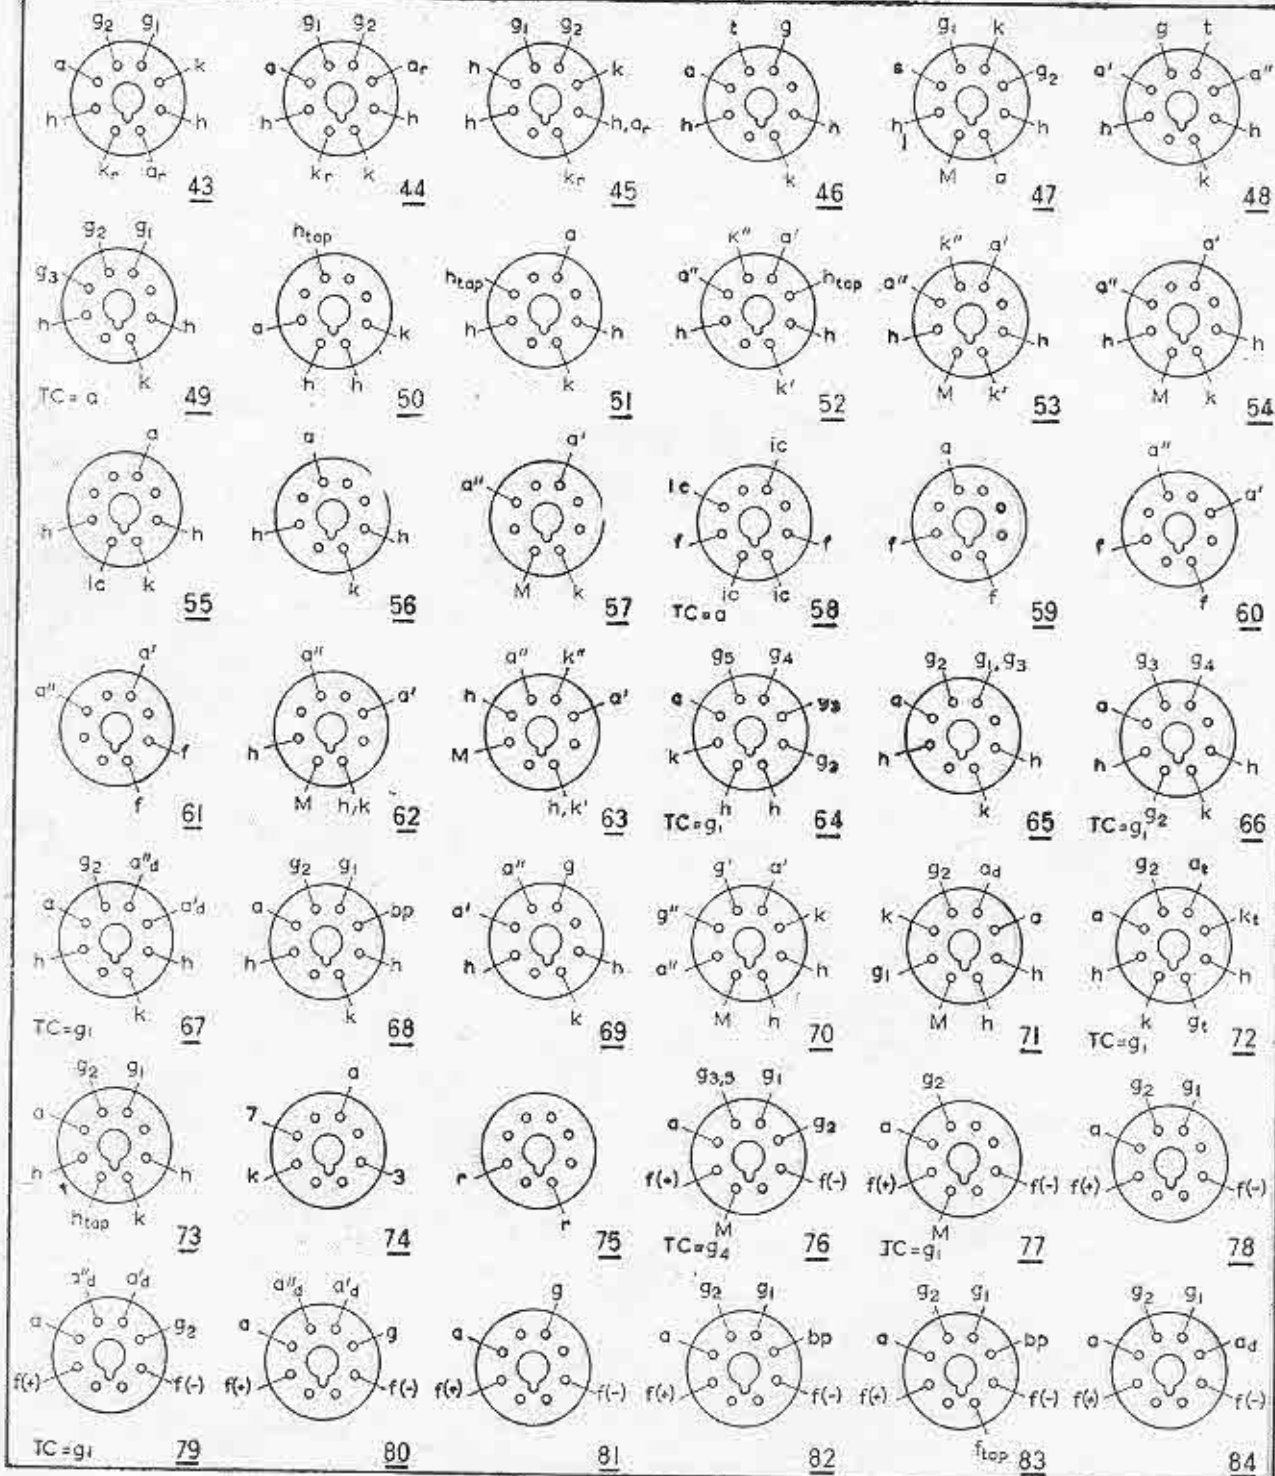


IO (continued)

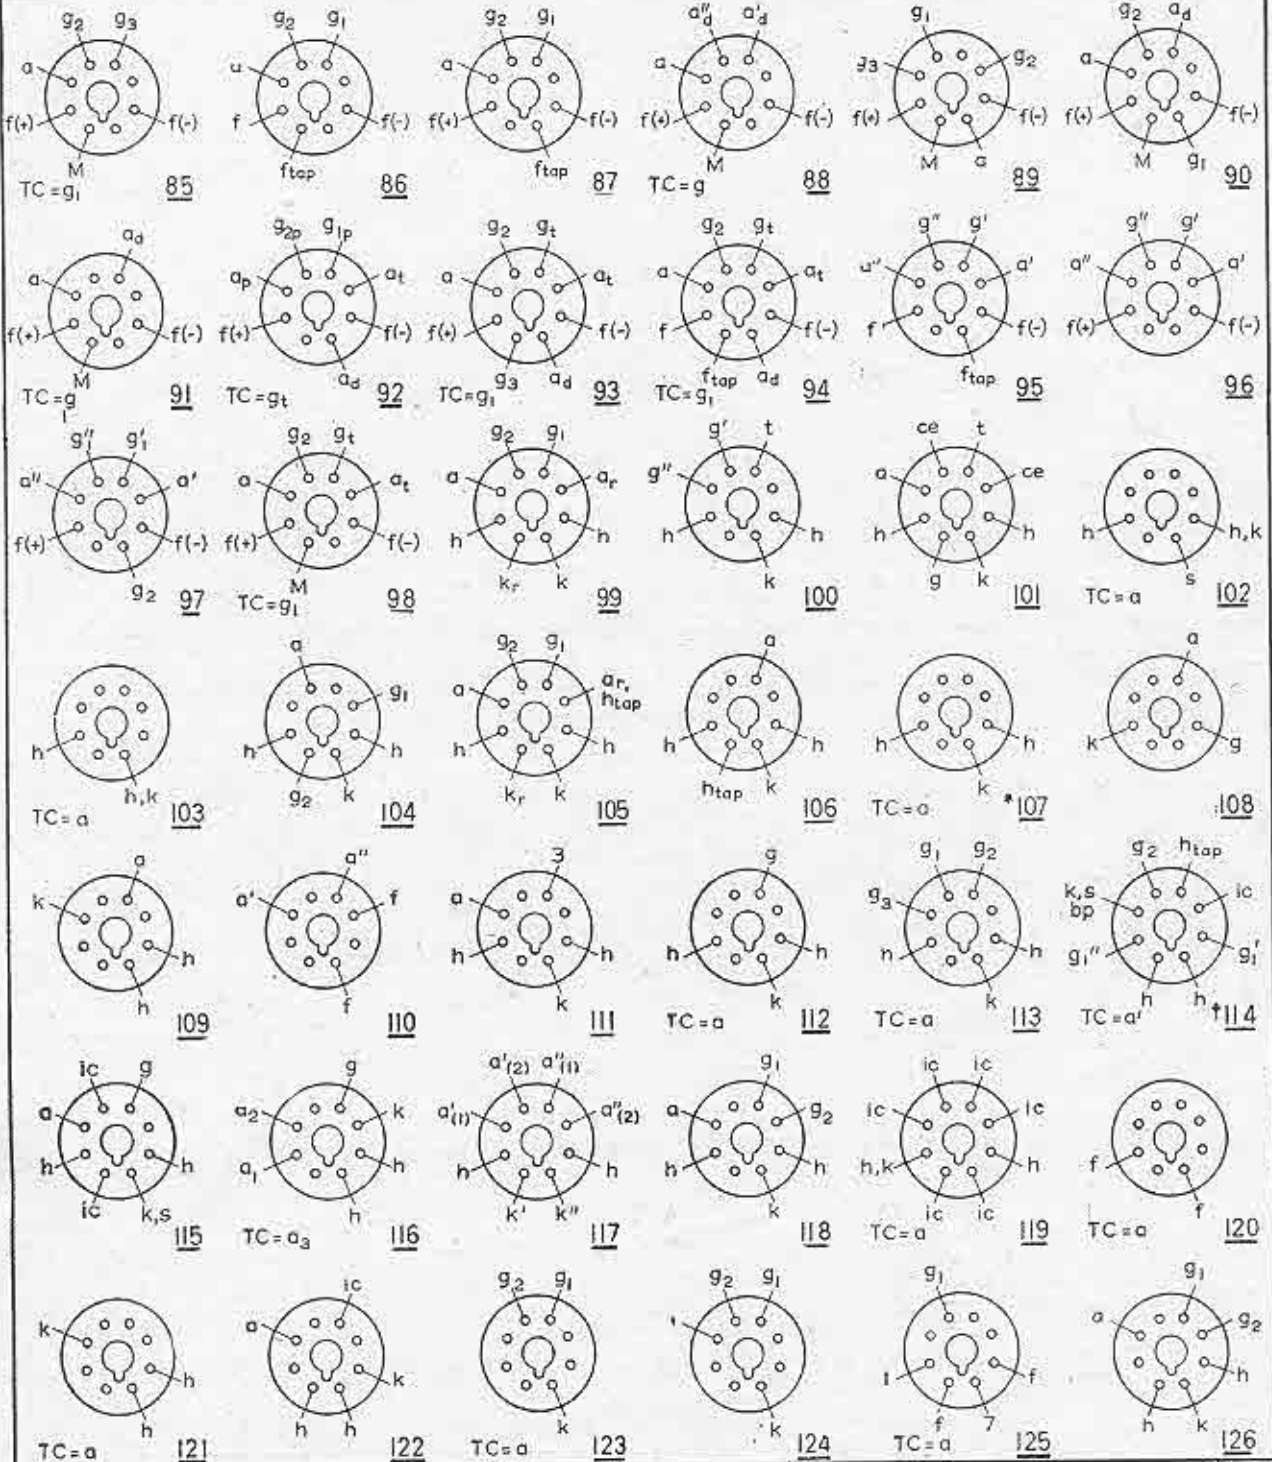


* g_1 to other TC

† a'' to other TC


10 (continued)

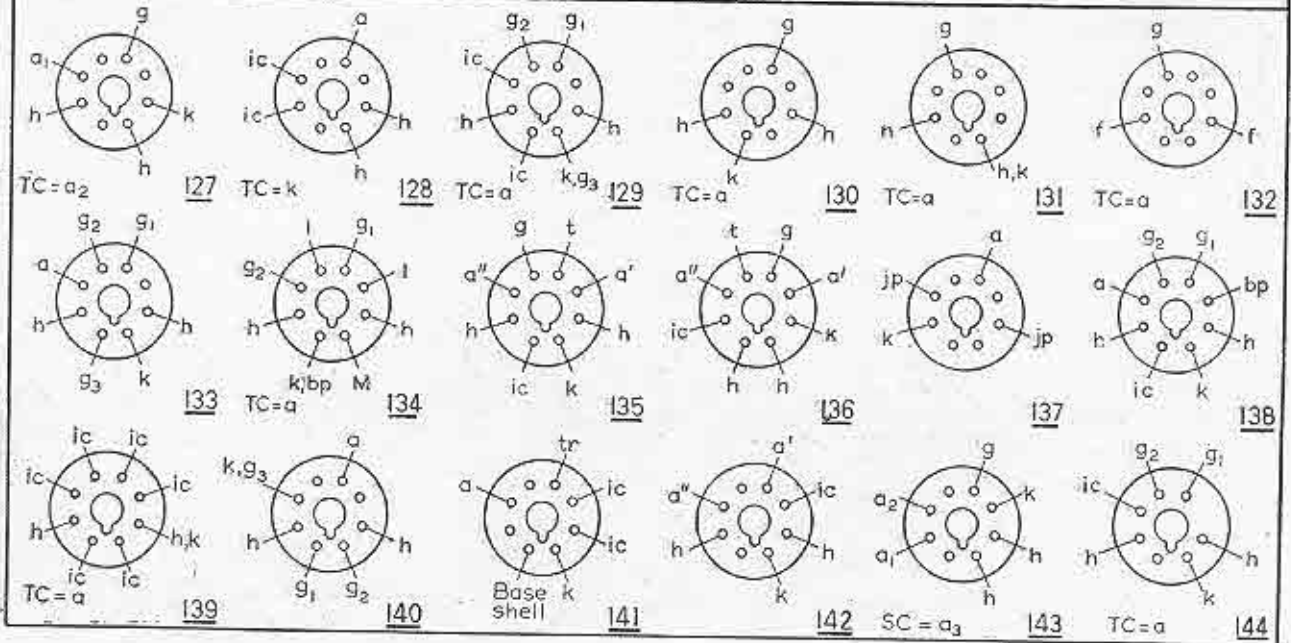


MO (MAZDA OCTAL)

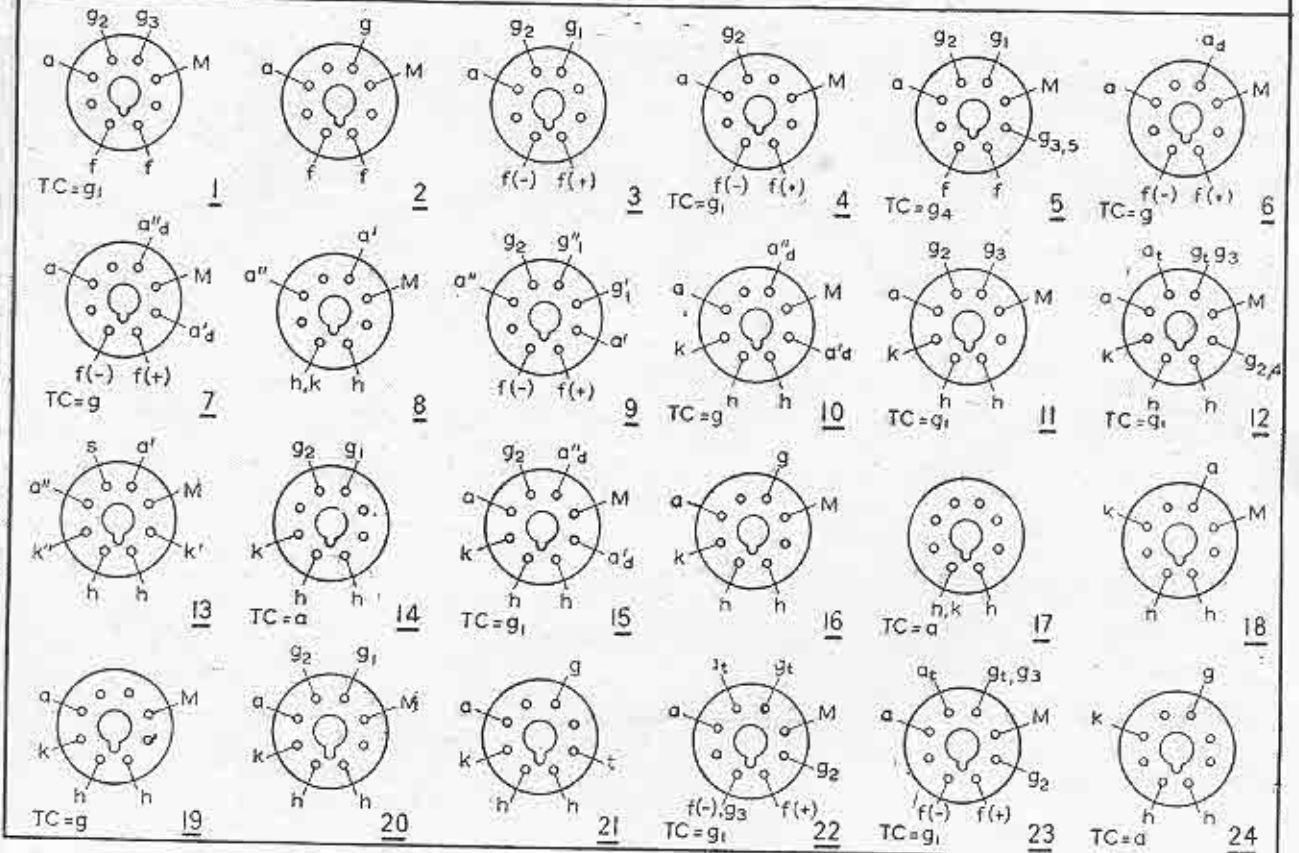


B9

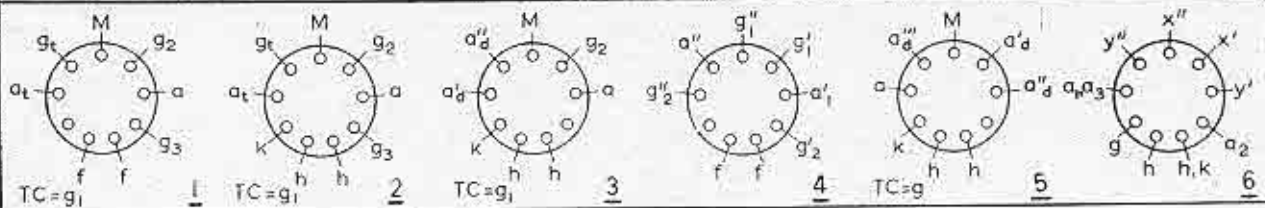


B9A (NOVAL)

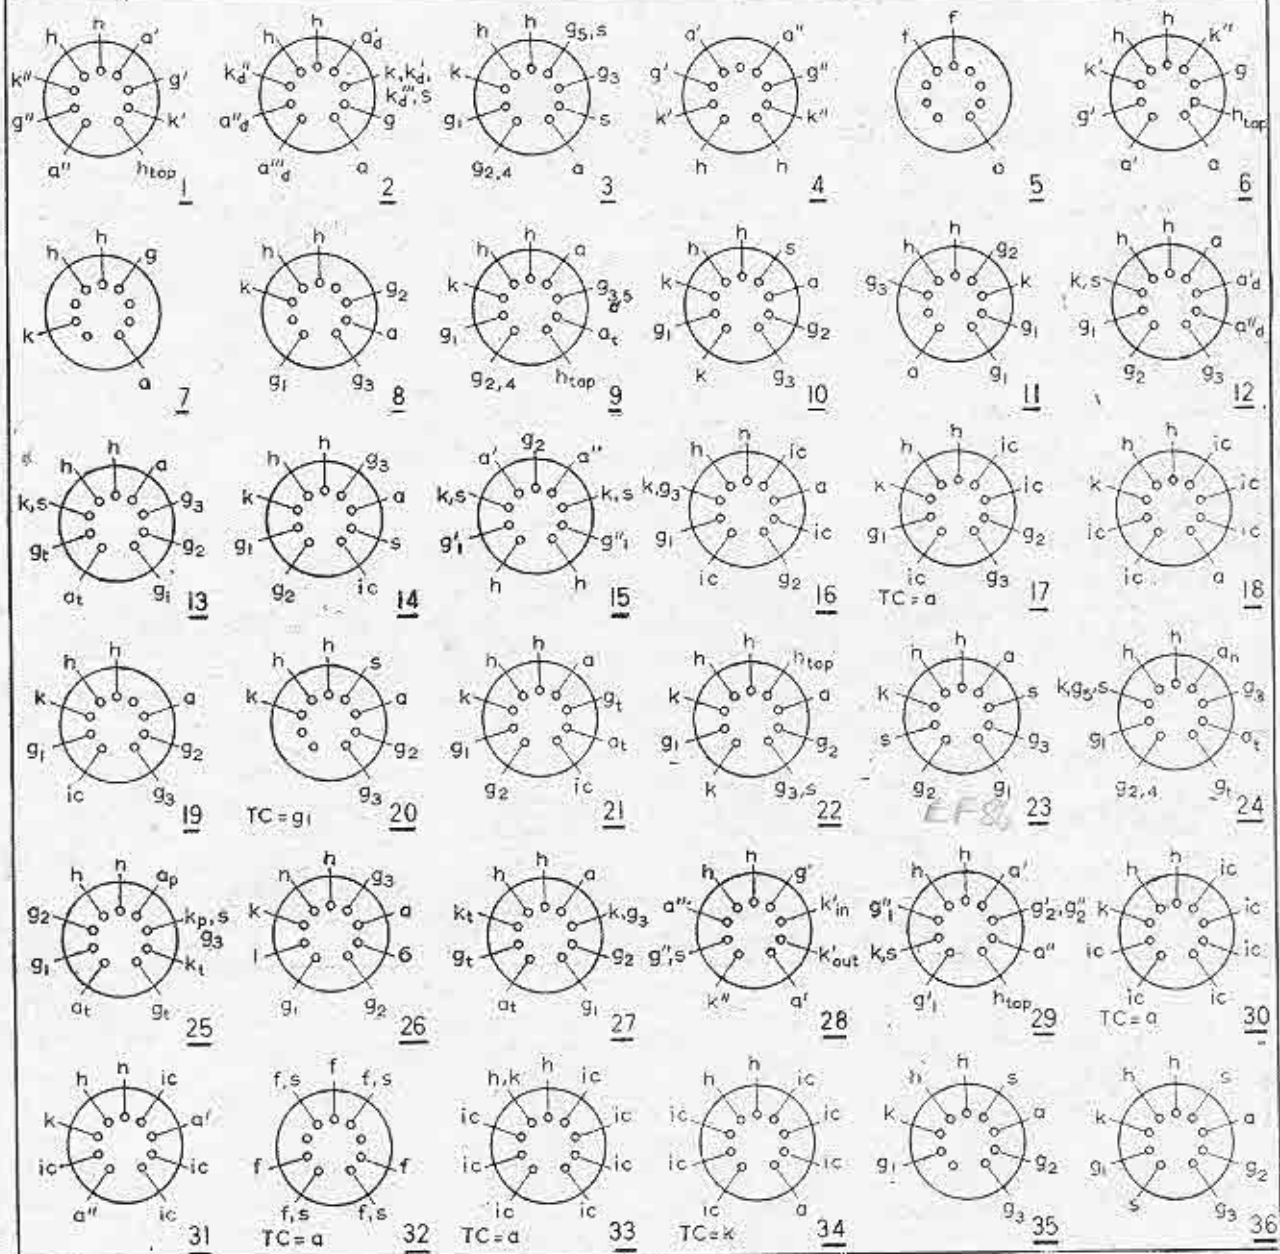


B9 A (Continued)




37




38




39




40




41




42




43




44




45



46




47




48



49




50




51




52




53




54




55




56




57




58




59




60




61




62




63




64




65



66




67




68




69



70




71




72




B9G

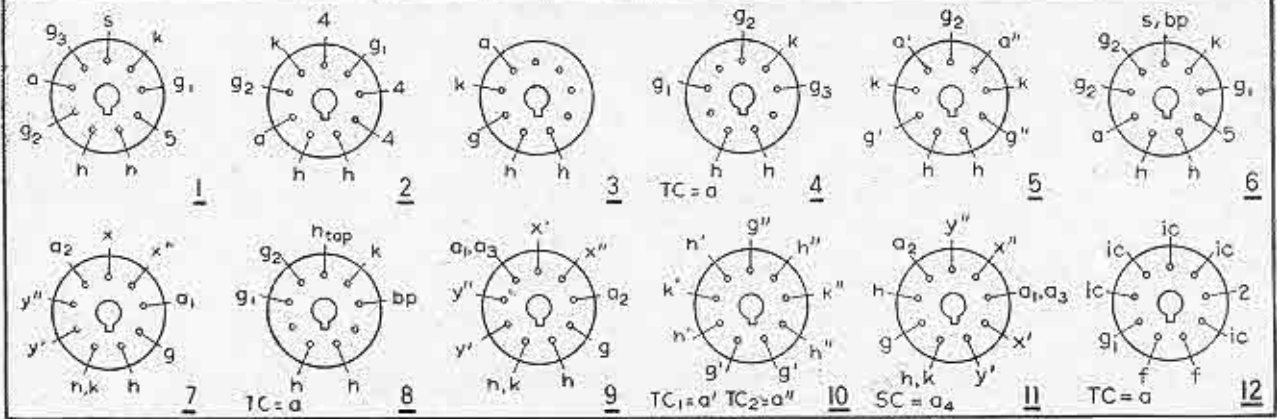


B12A

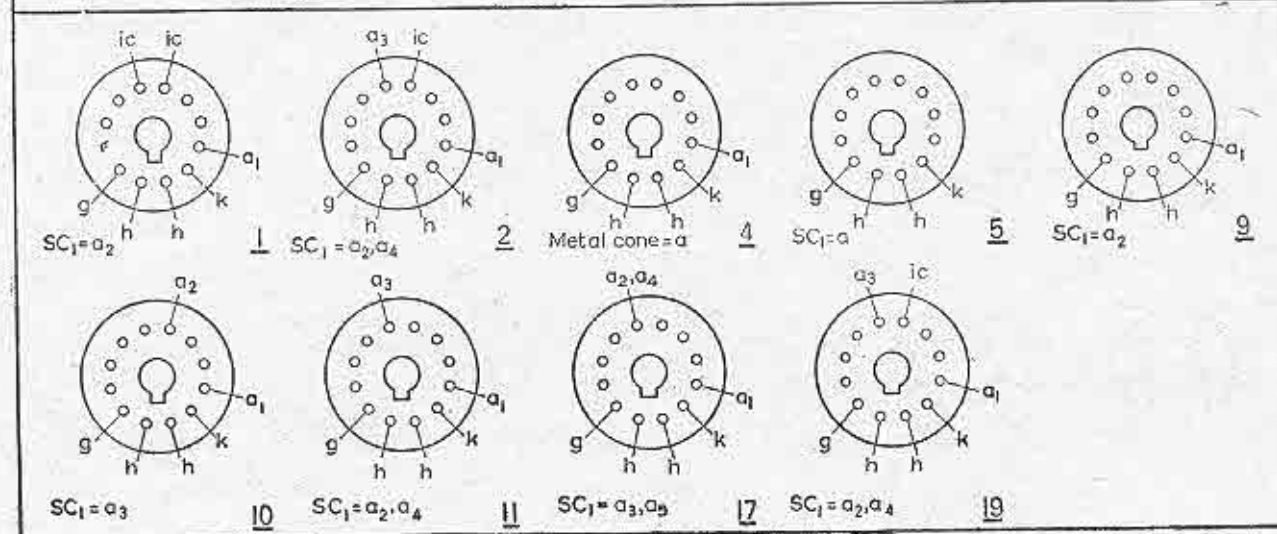


Ct 8 (SIDE CONTACT)

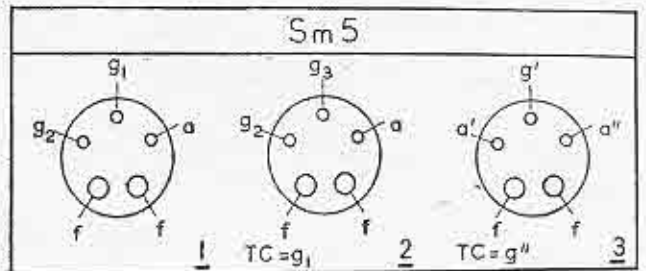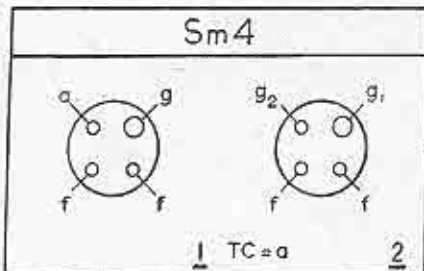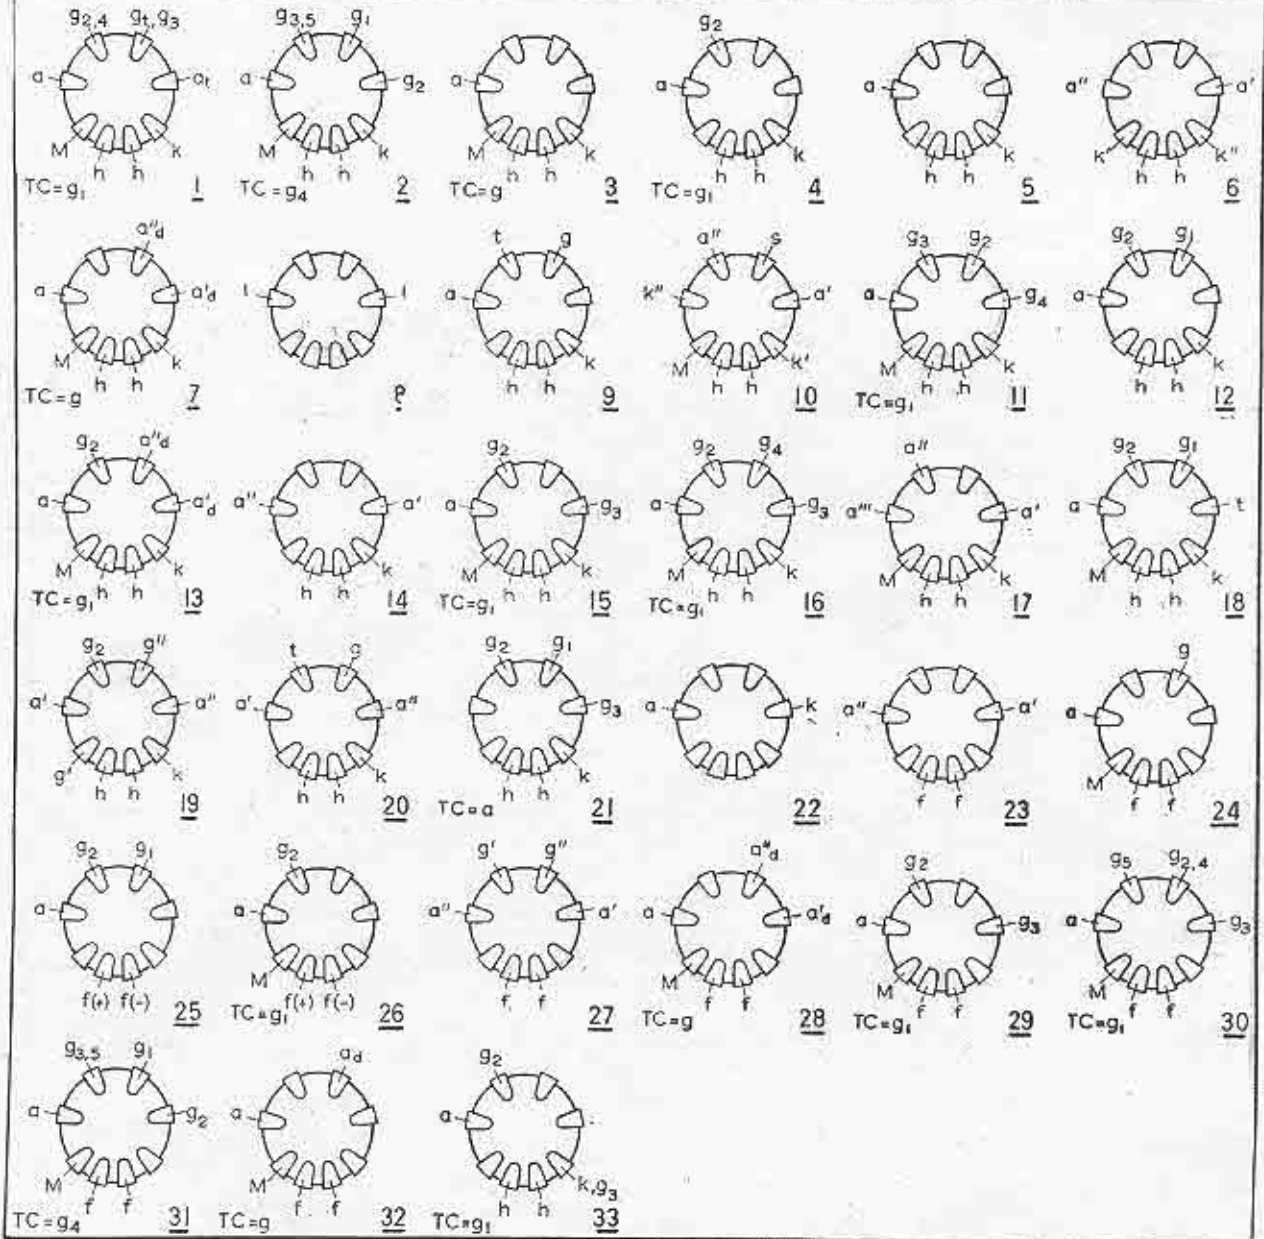


U X 4




1 TC = g₁




2




3




4




5



6




7




TC = a

8




TC = a


9




10



11




12




TC = a

13




TC = a

14



TC = a

15




TC = a

16




TC = a

17




TC = a

18




19




TC = a


20




21



22




23




24


U X 5




1 TC = g₁




2




3



4




5




TC = a

6




7




TC = a

8

UX6

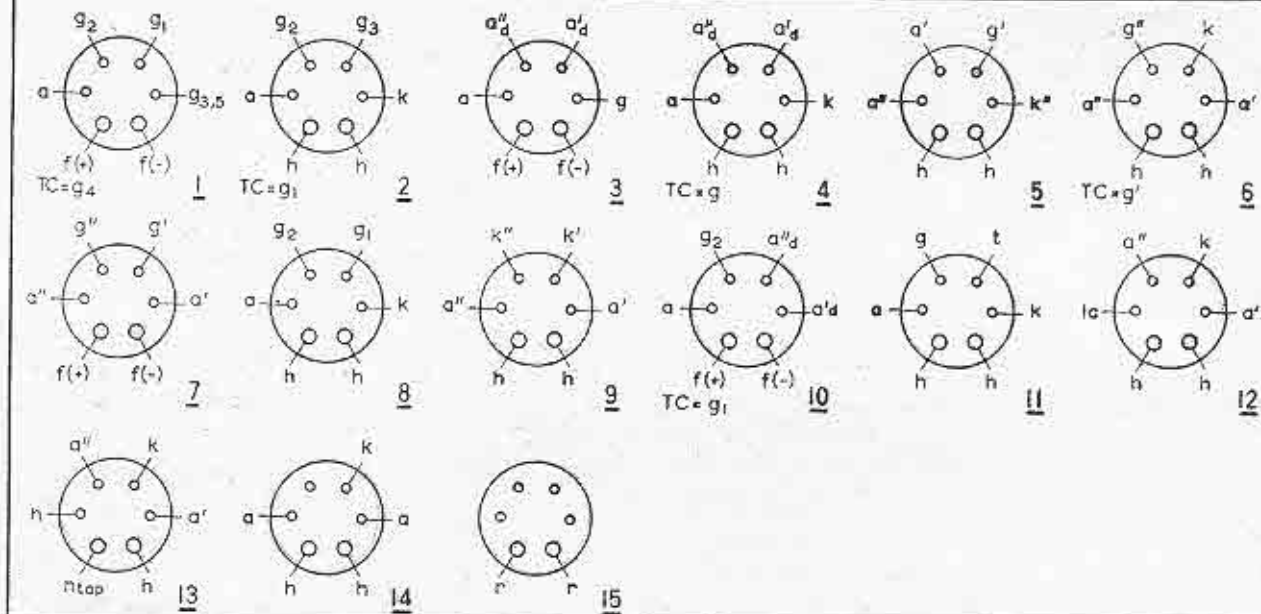

UX7

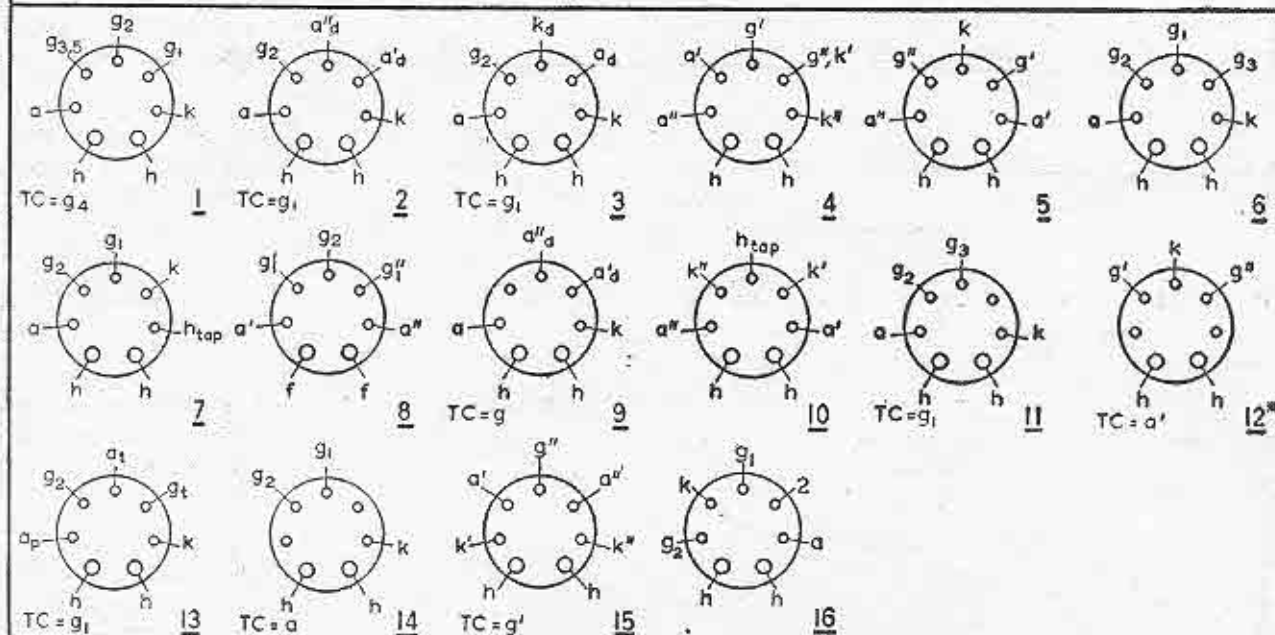

* a'' to other TC

TRADE NAMES AND MANUFACTURERS' ADDRESSES

A.E.I.	Associated Electrical Industries Ltd., Radio and Electronic Components Division, 155, Charing Cross Road, London, W.C.2.	HIVAC	Hivac, Ltd., Stonefield Way, Victoria Road, South Ruislip, Middx.
BRIMAR	Brimar Ltd., Footscray, Sidcup, Kent.	MARCONI	Electronic Tubes, Ltd., Kingsmead Works, High Wycombe, Bucks.
CATHODEON	Cathodeon Electronic, Ltd., Bircham Road, Southend-on-Sea, Essex.	MULLARD	Mullard, Ltd., Mullard House, Torrington Place, London, W.C.1.
COSSOR	Cossor Valve Company Ltd., Cossor House, Highbury Grove, London, N.5.	NEWMARKET-PYE	Newmarket Transistor Co., Ltd., Exning Road, Newmarket, Suffolk.
EDISWAN MAZDA	Associated Electrical Industries Ltd., Radio and Electronic Components Division, 155, Charing Cross Road, London, W.C.2.	R.C.A.	R.C.A. Great Britain, Ltd., Lincoln Way, Windmill Road, Sunbury-on-Thames, Middlesex.
EMISCOPE, EMITRON, ETEL	Electronic Tubes, Ltd., Kingsmead Works, High Wycombe, Bucks.	SEMICONDUCTORS	Semiconductors, Ltd., Cheney Manor, Swindon, Wilts.
ENGLISH ELECTRIC..	English Electric Valve Co., Ltd., Waterhouse Lane, Chelmsford, Essex.	S.T.C.	Standard Telephones & Cables, Ltd., Connaught House, 63, Aldwych, London, W.C.2.
FERRANTI	Ferranti Ltd., Gem Mill, Chadderton, Oldham, Lancs.	TEXAS	Texas Instruments, Ltd., Manton Lane, Bedford.
G.E.C. <i>Valves and C.R.T.S.</i>	M-O. Valve Co., Ltd., Brook Green, Hammer-smith, London, W.6.	TUNGSRAM	British Tungstram Radio Works, Ltd., West Road, Tottenham, London, N.17.
<i>Semiconductor products</i>	General Electric Co., Ltd., Semiconductor Division, Hazel Grove, Stockport, Cheshire.	20th CENTURY	20th Century Electronics, Ltd., King Henry's Drive, New Addington, Croydon, Surrey.
		WESTINGHOUSE	Westinghouse Brake & Signal Co., Ltd., 82, York Way, Kings Cross, London, N.1.


INDEX AND VALVE EQUIVALENTS

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
O (ZERO) —All entries under "zero" and "O" will be found together under O in the alphabetic section of the index. Where individual manufacturers have indicated either zero or O this has been followed in the tables.				1H4	IO-81	67		1S611	—	85	
1A3	B7G-13	45	DA 90, 1D13	1H5	IO-91	59, 60	HD14,	1S612	—	85	
1A4	UX4-2	25				62, 65, 67	DAC32	1S613	—	85	
1A5	IO-78	26, 29, 35		1H6	IO-80	67	see 1B5L	1S614	—	85	
1A6	UX6-1	14		1J5	IO-78	35		1S701	—	47	
1A7	IO-76	7, 11, 14	X14, DK32	1J6	IO-96	42		1S914	—	47	
1A8	IO-94	24		1L4	B7G-2	15, 17, 24	1F2, DF92	1S916	—	47	
1AB5	B8B-39	24		1LA4	B8B-27	35		1S5015	—	94	
1AB6	B7G-54	13	DK96	1LA6	B8B-29	7, 14		1S5016	—	94	
1AB6/ DK96	B7G-54	9		1LB4	B8B-27	35		1S5018	—	94	
1AC5	Wires	35		1LB6	B8B-30	14		1S5020	—	94	
1AC6	B7G-54	7, 13	X18, 1C2, DK92	1LC5	B8B-28	24		1S5022	—	94	
1AC6/ DK92	B7G-54	9		1LC6	B8B-29	14		1S5024	—	94	
1AD4	Wires	24		1LD5	B8B-31	15, 24		1S5027	—	94	
1AD5	Wires	24		1LE3	B8B-36	67		1S5030	—	94	
1AE5	Wires	14		1LG5	B8B-33	24		1S5033	—	94	
1AH5	B7G-5	15, 24	see DAF96, 1FD1, 1P1 DF96, 1F1	1LH4	B8B-26	67	see 4H5	1S5036	—	94	
1AJ4	B7G-2	15, 24		1LN5	B8B-28	15, 24		1S5039	—	94	
1B3	IO-58	88		1M1	B8D-9	88	Y25, DM70, 1M3 see DM70	1S5043	—	94	
1B4	UX4-2	25		1M3	B8D-9	89		1S5047	—	94	
1B5L	UX6-3	67		1N5	IO-77	16, 18, 22, 24	Z14, DF33	1S5051	—	95	
1B7	IO-76	14		1N6	IO-84	35		1S5056	—	95	
1B8	IO-92	35		1N650	—	47		1S5062	—	95	
1B47	B7G-28	92		1N651	—	47		1S5068	—	95	
1B48	—	76		1N652	—	47		1S5075	—	95	
1C1	B7G-3	8	X17, 1R5, DK91	1N653	—	47		1S5082	—	95	
1C2	B7G-54	9	1AC6, X18, DK92	1N1130	—	86		1S5091	—	95	
1C3	B7G-54	9	DK96	1N1131	—	86		1S5100	—	95	
1C5	IO-78	26, 27, 29, 33, 34, 35	DL35, N14	P1	B7G-9	28, 38	DL96, 3C4	1S5110	—	95	
1C6	UX6-1	14		1P5	IO-77	25		1S5120	—	95	
1C8	—	14		1P10	B7G-6	28	3S4, N17, DL92, 3Q4	1S5130	—	95	
1C21	IO-108	92		1P11	B7G-9	28	3V4, DL94	1S5150	—	95	
1D5	B5-8	71	405UA, RZ, URIC	1Q5	IO-78	35		1S7033	—	95	
1D6	UX6-14	71		1R4	B8B-23	45		1S7036	—	95	
1D7	IO-76	14	see 1A6	1R5	B7G-3	7, 13	DK91, X17, 1C1	1S7039	—	95	
1D8	IO-92	35		1R5/ DK91	B7G-3	9		1S7043	—	95	
1D13	B7G-13	44	1A3, DA90	1RE2-1-8-1	—	80		1S7047A	—	95	
1E4	IO-81	67		1S001	—	85		1S7051A	—	95	
1E5	IO-77	25		1S002	—	85		1S7056A	—	95	
1E7	IO-97	42		1S003	—	85		1S7062A	—	95	
1E8	Wires	14		1S004	—	85		1S7068A	—	95	
1F1	B7G-64	17	DF96, 1A14	1S005	—	85		1S7075A	—	95	
1F2	B7G-2	17	1L4, DF92	1S4	B7G-4	26, 34, 35, 36	DL91	1S7082A	—	95	
1F3	B7G-2	17	W17, DF91, 1T4	1S5	B7G-5	15, 17, 18, 24	ZD17, 1FD9, DAF91	1S7091	—	95	
1F4	UX5-3	35		1S5/ DAF91	B7G-5	18		1S7100	—	95	
1F5	IO-78	35	KL35	1S101	—	85		1S7110	—	95	
1F6	UX6-10	25		1S103	—	85		1S7120	—	95	
1F7	IO-79	25		1S105	—	85		1S7130	—	95	
1FD1	B7G-65	17	DAF96, 1AH5	1S107	—	85		1S7150A	—	95	
1FD9	B7G-5	17	1S5, ZD17, DAF91	1S111	—	85		1SA6	IO-89	25	
1G4	IO-81	67		1S113	—	85		1T2	Wires	86	see R16
1G5	IO-78	35		1S115	—	85		1T4	B7G-2	15, 17, 18, 24	W17, 1F3, DF91, W17
1G6	IO-96	42, 62		1S121	—	47		1T4/ DF91	B7G-2	18	
				1S401	—	85		1T5	IO-78	35	
				1S402	—	85		1T6	Wires	24	
				1S403	—	85		1U4	B7G-2	25	
				1S404	—	85		1U5	B7G-11	15	
				1S405	—	85		1V2	B9A-5	76	
				1S600	—	85		1V5	Wires	35	
				1S601	—	85		1W4-350	B4-14	74	R3, 431U, MU14, UO5, R43
				1S602	—	85		1W4-500	B4-14	74	
				1S603	—	85		1W5	Wires	24	
				1S604	—	85		1X2B	B9A-32	86	see R19
				1S610	—	85		1Z2	B7G-10	88	
								2A3	UX4-1	26, 36, 42]	
								2A5	UX6-8	34	
								2A6	UX6-4	66, 67	



MEASURING INSTRUMENTS

Regd. Trade Mk.

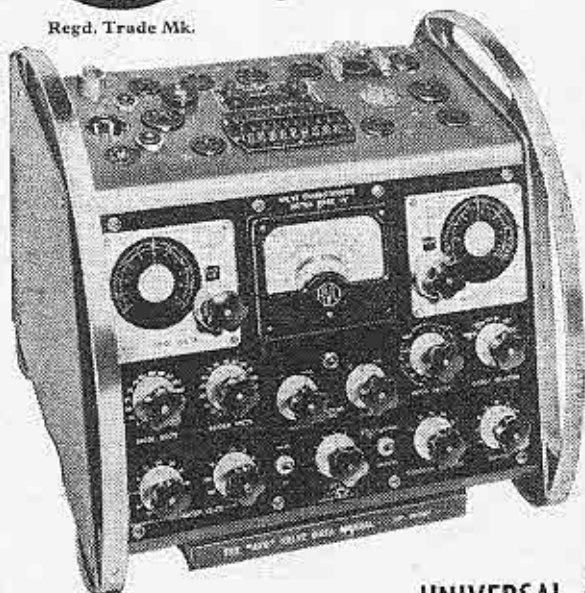

AVO VALVE CHARACTERISTIC METER Mk. IV

This compact and most comprehensive Valve Tester sets a new high standard of accuracy for instruments of its type. It will quickly test any standard receiving or small transmitting valve on any of its normal characteristics under conditions corresponding to a wide range of d.c. electrode voltages.

The instrument will produce all the necessary data to enable I_a/V_a , I_a/V_g , I_a/V_s , etc., curves to be drawn, measures mutual conductance up to 60 mA/V, determines inter-electrode insulation with the heater hot or cold and enables 'gas' checks to be made, tests rectifying and signal diodes under reservoir load conditions, and covers the majority of normal heater voltages up to 117 volts.

A comprehensive Instruction Book and a detailed Valve Data Manual are provided.


The instrument operates on a.c. mains, 100-120 volts and 200-260 volts, 50-60 c/s. Weight: 34lb.

UNIVERSAL AVOMETERS

The AvoMeter is a self contained a.c./d.c. moving coil instrument providing numerous ranges of readings on a 5-in. hand calibrated scale fitted with an anti-parallax mirror. Range selection is carried out by two interlocking rotary switches, for a.c. and d.c. respectively. An automatic cut-out is incorporated to safeguard the instrument against damage through inadvertent overload. Accuracy is within the limits laid down in Section 6 of BSS.89/1954 for 5-in. scale length industrial portable instruments.

	MODEL 7	MODEL 8	MODEL 40
CURRENT: a.c. & d.c.	0 to 10 amps	0 to 10 amps	0 to 12 amps
VOLTAGE: a.c. & d.c.	0 to 1,000 volts	0 to 2,500 volts	0 to 1,200 volts
RESISTANCE:	Up to 40 meg Ω	Up to 200 meg Ω	Up to 1 meg Ω
DECIBELS:	-25 to +16 dB	-15 to +15 dB	—
CAPACITANCE:	0.01 to 20mFd	—	—
AUDIO-FREQUENCY POWER:	0 to 2 watts	—	—
WEIGHT:	6 $\frac{1}{2}$ lb.	6 $\frac{1}{2}$ lb. (including leads)	6 $\frac{1}{2}$ lb.

Panclimatic versions, Model 7X and 8X, AvoMeters are also available

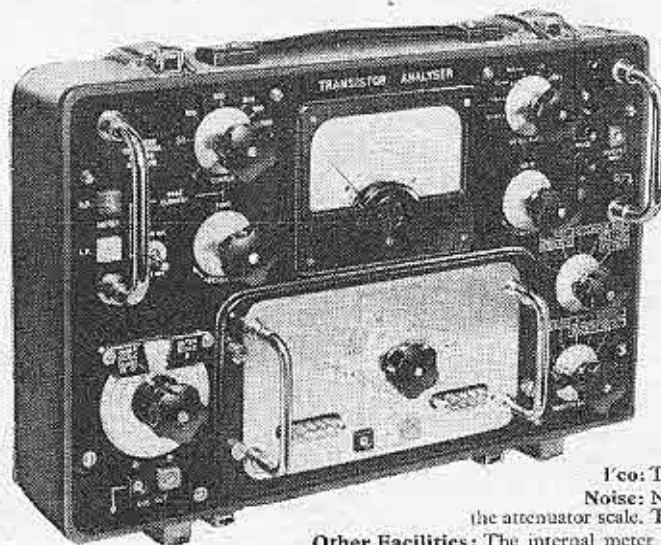

AVO TRANSISTOR ANALYSER

A compact battery operated instrument providing a simple method of checking transistors under normal operating conditions. Designed for small signal and medium power transistors. For conditions where the instrument will be in continuous use or where voltages other than those supplied internally are desirable, there is provision for use of external supplies. Both internal and external supplies can be monitored on the internal meter.

Collector Voltage: 1.5, 3, 4.5, 6, 10.5 volts or external. The changing of the 'Collector Volts' switch from P.N.P. to N.P.N. reverses the polarity of supply voltages, meter connections, etc.

Base Current: 0-40 mA in two ranges using internal supplies.

Collector Current: Can be measured at any base current and collector voltage selected, using the following ranges: 0-100 μ A, 0-1mA, 0-100mA, 0-1A.

Turnover Voltage: Means are provided for checking turnover voltage using an external supply.

Beta: Is measured at 1,000 c/s in two ranges 0-25 and 0-250.

h_{fe}: This can be checked by pressing a button.

Noise: Noise equivalent of transistor under test is directly indicated on the attenuator scale. The ranges are calibrated from 1-20 and 20-40 dB.

Other Facilities: The internal meter ranges, amplifier and oscillator, are available for voltage and current measurements, signal tracing, etc. An external lead is provided for measurement of transistors *in situ*.


AVO LTD AVOCET HOUSE, 92-96 VAUXHALL BRIDGE ROAD, LONDON S.W.1

A MEMBER OF THE METAL INDUSTRIES GROUP OF COMPANIES


Telephone: VICtoria 3404 (12 lines)

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
2A7	UX7-1	13		2N404	—	55		2N1396	—	57	
2B4	UX5-1	97		2N405	—	55		2N1397	—	57	
2B6	UX7-4	67		2N406	—	55		2N1425	—	57	
2B7	UX7-2	25		2N407	—	55		2N1426	—	57	
2B25	B7G-12	88		2N408	—	55		2N1499A	—	57	
2C21	UX7-15	67		2N409	—	55		2N1500	—	57	
2C22	10-107	67		2N410	—	55		2N1727	—	57	
2C51	B9A-4	67		2N411	—	55		2N1728	—	57	
2D2	B5-3	45		2N412	—	55		2N1742	—	57	
2D4A	B5-3	45	D41, DDL4, V914	2N456	—	58		2N1743	—	57	
2D4B	B7-21	45		2N457	—	58		2N1744	—	57	
2D13C	B5-3	45	10D1	2N458	—	58		2N1745	—	57	
2O21	B7G-15	95		2N499	—	57		2N1747	—	57	
	B7G-51	97		2N501	—	57		2N1748	—	57	
2E5	UX-11	90		2N501A	—	57		2N1749	—	57	
2E30	UX7-5	42		2N502	—	57		2N1750	—	57	
2E31	Wires	24		2N502A	—	57		2P	B4-1	27	PA20, ACO42
2E32	Wires	24		2N503	—	57		2S001	—	58	
2E35	Wires	35		2N535B	—	57		2S002	—	58	
2E36	Wires	35		2N536	—	57		2S003	—	58	
2E41	Wires	24		2N544	—	55		2S004	—	58	
2E42	Wires	24		2N578	—	55		2S005	—	58	
2G5	UX-11	90		2N579	—	55		2S012A	—	59	
2G22	Wires	14		2N580	—	55		2S013A	—	59	
2G101	—	58		2N581	—	56		2S014	—	59	
2G102	—	58		2N582	—	56		2S017	—	59	
2G103	—	58		2N583	—	56		2S018	—	59	
2G104	—	58		2N584	—	56		2S020	—	59	
2G110	—	58		2N585	—	56		2SI01	—	59	
2G220	—	58		2N586	—	56		2SI09	—	59	
2G221	—	58		2N591	—	56		2S701	—	59	
2G222	—	58		2N597	—	57		2S702	—	59	
2G223	—	58		2N598	—	57		2T/270K	B7G-22	87	HR2, V1928, 6305
2G224	—	58		2N599	—	57		2V3	IO-58	88	
2G225	—	58		2N600	—	57		2W3	IO-59	76	
2G226	—	58		2N601	—	57		2X2	UX4-8	88	
2G227	—	58		2N640	—	56		2X102/G	—	47	
2G228	—	58		2N641	—	56		2X103/G	—	47	
2G229	—	58		2N642	—	56		2X104/G	—	47	
2G230	—	58		2N643	—	56		2X105/G	—	47	
2G231	—	58		2N644	—	56		2X106/G	—	47	
2G240	—	58		2N645	—	56		2XP	B4-1	27	2P, PA20, ACO42
2G301	—	58		2N647	—	56		2Y2	UX4-8	88	
2G302	—	58		2N649	—	56		2Z2	UX4-4	76	
2G303	—	58		2N671	—	57		3/1	—	99	
2G304	—	58		2N675	—	57		3/2	—	99	
2N104	—	54		2N696	—	58		3/3	—	99	
2N105	—	54		2N697	—	58		3/4	—	99	
2N109	—	54		2N706A	—	58		3/5	—	99	
2N139	—	54		2N711	—	58		3/6A	—	99	
2N140	—	54		2N715	—	58		3/16	B7B-2	99	
2N175	—	54		2N716	—	58		3/18	B7B-2	99	
2N176	—	54		2N753	—	58		3/20	B4E-1	99	
2N207	—	57		2N1010	—	56		3/31	B7B-2	99	
2N215	—	54		2N1023	—	56		3/32	B7B-2	99	
2N217	—	54		2N1066	—	56		3A/146J	—	70	
2N218	—	54		2N1090	—	56		3A/147J	—	70	
2N219	—	54		2N1091	—	56		3A/148J	—	70	
2N220	—	54		2N1123	—	57		3A/154M	B8B-15	70	
2N247	—	54		2N1158	—	57		3A/167M	B8B-56	67	
2N269	—	54		2N1177	—	56		3A4	B7G-7	27, 28, 34, 70	DL93
2N270	—	54		2N1178	—	56		3A5	B7G-8	67	DCC90
2N274	—	54		2N1179	—	56		3B/240M	B8B-54	70	
2N301	—	54		2N1180	—	56		3B/241M	B8B-54	70	
2N301-A	—	54		2N1183	—	56		3B5	IO-87	35	
2N331	—	54		2N1183-A	—	56		3B7	B8B-34	67	
2N351	—	54		2N1183-B	—	56		3B24	UX4-13	76	
2N370	—	55		2N1184	—	56		3B25	UX4-9	76	
2N371	—	55		2N1184-A	—	56		3B26	IO-58	88	
2N372	—	55		2N1184-B	—	56		3B27	UX4-4	76	
2N373	—	55		2N1224	—	57					
2N374	—	55		2N1225	—	57					
2N376	—	55		2N1226	—	57					
2N384	—	55		2N1300	—	57					
2N398	—	55		2N1301	—	57					
				2N1395	—	57					

FERRANTI

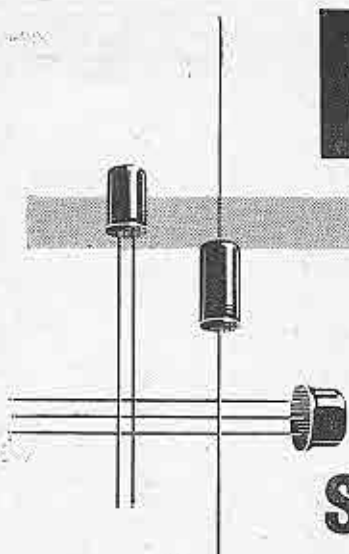


Silicon Semiconductor Devices

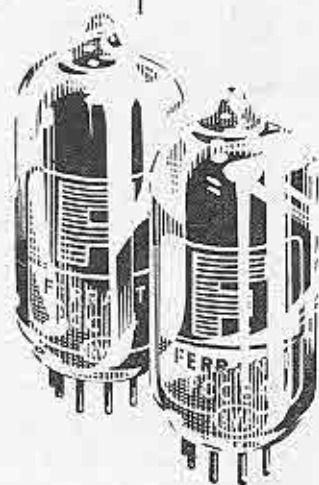

Valves

Cathode Ray Tubes

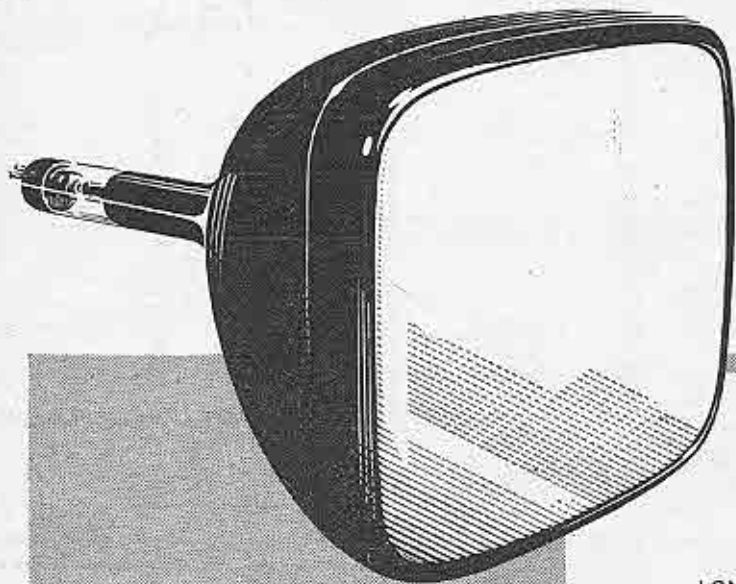

FERRANTI LTD • GEM MILL
CHADDERTON • OLDHAM • LANCs
Tel: MAIn 6661

LONDON OFFICE: Tel: TEMple Bar 6666.

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
3B28	UX4-9	75		5U4	IO-60	71, 72, 74, 75	U52, 53KU, 5T4	6AL6	IO-38	36	
3C4	B7G-9	26, 29, 34, 37, 38, 41	DL96	5V4	IO-62	71, 72, 74, 75, 76	54KU, GZ32	6AL7	IO-101	90	
3C5	IO-87	35		5W4	IO-60	76		6AM4	B9A-38	60	
3C6	B8B-35	67		5X3	UX4-3	88		6AM5	B7G-25	16, 26, 28, 35, 37, 38, 41	N77, EL91, N144, 7D9
3C24	UX4-9	69		5X4	IO-61	75	R52	6AM5/	B7G-25	29	
3D6	B8B-32	25, 26		5Y3	IO-60	71, 72, 74, 75	U50	EL91			
3C23	UX4-20	96		5Y4	IO-61	76		6AM6	B7G-21	15, 18, 24	8D3, EF91, Z77, 6F12, SP6
3D22	B7G-73	97		5Z3	UX4-3	70, 75	U50, 4274A	6AM6/	B7G-21	18	
3D22A	UX7-16	96		5Z4	IO-62	71, 72, 74, 75	R52, U50, GZ30, 52KU	EF91			
3E6	B8B-44	25		6/5	—	99		6AN5	B7G-14	36	
3LE4	B8B-32	36		6/6	—	99		6AN6	B7G-38	45	
3LF4	B8B-32	35		6/7	—	99		6AQ5	B7G-27	26, 28, 30, 32, 35, 37, 38, 39, 40, 41	EL90
3Q4	B7G-6	26, 32, 34, 36	N18, DL95	6/30L2	B9A-39	61		6AQ5/	B7G-27	29	
3Q5	IO-87	26, 29, 33, 34, 35	N15, N16, DL33	6A3	UX4-1	36, 37, 42		EL90			
3S002	—	59		6A4	UX5-3	36		6AQ6	B7G-19	67	
3S004	—	59		6A5	IO-35	36, 42		6AO7	IO-32	67	
3S4	B7G-6	26, 28, 29, 34, 36, 41	N17, DL92, 1P10	6A6	UX7-5	42, 62, 67	HLA2, 41MTL, MH4, 354V, ACHL	6AO8	B9A-39	61	see ECC85
3S4/	B7G-6	38	N17, DL92, 1P10, 3S4	6A7	UX7-1	7, 9, 12, 13		6AR5	B7G-41	36	
DL92				6A8	IO-1	7, 9, 12, 13	X63	6AR6	IO-37	36	
3SB6	IO-78	25		6AB4	B7G-45	67		6AR7	IO-33	67	
3V4	B7G-9	26, 28, 35, 37, 38	1P11, DL96, N19	6AB5	UX6-11	90		6AS5	B7G-42	36	
3V4/	B7G-9	29	3V4, N19, 1P11, DL94	6AB6	IO-23	36		6AS6	B7G-32	16, 22, 25	
DL94				6AB7	IO-10	18, 25		6AS7	IO-26	36	A1834
				6AB8	B9A-13	26, 27, 29, 35, 60, 61, 66	LN152, ECL80	6AT6	B7G-19	60, 62, 64, 66	DH77, EBC90
4/13	B7B-1	99		6AC5	IO-20	36, 42		6AU5	IO-140	36	
4/14T	B7B-1	99		6AC6	IO-23	36		6AU6	B7G-16	15, 24	EF94
4/14TG	B7B-1	99		6AC7	IO-10	18, 24, 25		6AV6	B7G-19	59, 66	
4/15T	B7B-1	99		6AD5	IO-20	67		6AX5	IO-54	76	
4/15TG	B7B-1	99		6AD6	IO-46	90		6B4	IO-81	26, 36, 37	6A3
4/100BU	B4-5	71		6AD7	IO-42	36		6B5	UX6-5	36	
4A6	IO-95	42, 67		6AE5	IO-20	67		6B6	IO-29	67	
4A88	—	80		6AE6	IO-23	67		6B7	UX7-2	24	
4C1017	—	80		6AE7	IO-24	67		6B8	IO-15	15, 18, 24	
4D1	B7-23	59	DA, HL1320, HL13C	6AF4A	B7G-60	60		6BA6	B7G-16	15, 18, 19, 21, 24	W727, EF93
4D32	B7A	69		6AF5	IO-20	67		6BA7	B9A-3	14	
4D958	—	80		6AF6	IO-100	90		6BD6	B7G-16	25	
4THA	B7-3	7	AC/TH1, TH4A, TH4B	6AF7	IO-48	90		6BE6	B7G-29	7, 9, 11	X77, X727, EK90
4TPB	B7-6	16		6AG5	B7G-14	19, 25		6BE6/	B7G-29	9, 13	X727, EK90
4TSA	B7-38	16		6AG6	IO-36	26	N147, EL33, 6M6	EK90			
4TSB	B7-5	16		6AG7	IO-11	36		6BF6	B7G-19	67	
4XP	B4-1	27	LP4, PX4, PP3/250, ACO44, P12/250	6AH5	IO-104	36		6BG6	IO-39	42	
				6AH6	B7G-16	67		6BH6	B7G-32	15	
5/2	B7B-3	99		6AH7	IO-27	67		6BJ6	B7G-32	15, 21	
5/2T	B7B-3	99		6AJ5	B7G-14	25		6BK4	IO-130	90	
5/3	B7B-3	99		6AJ7	IO-10	25		6BM8	B9A-37	26, 37	see ECL82
5/3T	B7B-3	99		6AJ8	B9A-24	13	ECH81, X719	6BN5	B9A-26	29	see EL85
5A/102D	IO-8	23		6AK5	B7G-14	15, 24	EF95	6BQ5	B9A-16	26, 27, 29, 35, 37, 38, 39, 41	N709, EL84
5A/125M	B8G-3	23		6AK5/	B7G-14	19		6BQ7A	B9A-39	60	
5A/162D	IO-8	23		EF95				6BR5	B9A-41	89	see EM80
5A/163K	B9A-60	23		6AK6	B7G-16	26, 37		6BR7	B9A-35	15	8D5
5A/170K	B9A-45	23		6AK7	IO-10	25		6BR8	B9A-67	15, 60	
5A/180M	B8G-19	23		6AK8	B9A-2	60, 61, 66	EABC80, 6T8, DH719	6BS7	B9A-20	15	
5AZ4	IO-60	76		6AL5	B7G-18	44, 45	DD6, D77, D152, 6D2, EB91, DD6G	6BT4	B8A-14	75	EZ40, UU9, 66KU, U150
5B/110M	B8G-3	23						6BW6	B9A-19	26, 37	
5B/254M	B8B-66	41, 70						6BW7	B9A-10	15	6BX6, EF80, Z719, Z152
5B/255M	B8B-65	41, 70						6BX6	B9A-10	15, 19, 24	see EF80, 6BW7, Z719, Z152
5B/256M	B8B-65	70						6BY7	B9A-10	19, 24	EF85, W719
5B/257M	B8B-65	70						6C4	B7G-15	27, 29, 31, 35, 60, 68	L77, EC90
5D1	—	80									
5R4	IO-60	71, 72	5U4								
5T4	IO-60	76									

FOR COMPLETE DATA
ON MULLARD VALVES, TUBES,
SEMICONDUCTORS
AND COMPONENTS


COMPREHENSIVE TECHNICAL HANDBOOK SERVICE

The Mullard Technical Handbook has long been established as the comprehensive reference work for all those needing full data on Mullard Valves, Tubes and Semiconductors.

It has now been replanned: a volume on Electronic and Magnetic Components has been added and Volume 1A incorporated in enlarged Volumes 1 and 3.

The Handbook Service includes the supply of any or all of the loose leaf volumes listed below, plus the automatic issue of revised and supplementary sheets as and when published.

Mullard Limited,
T.S.D. Data and
Publications Section,
Mullard House,
Torrington Place,
London, W.C.1

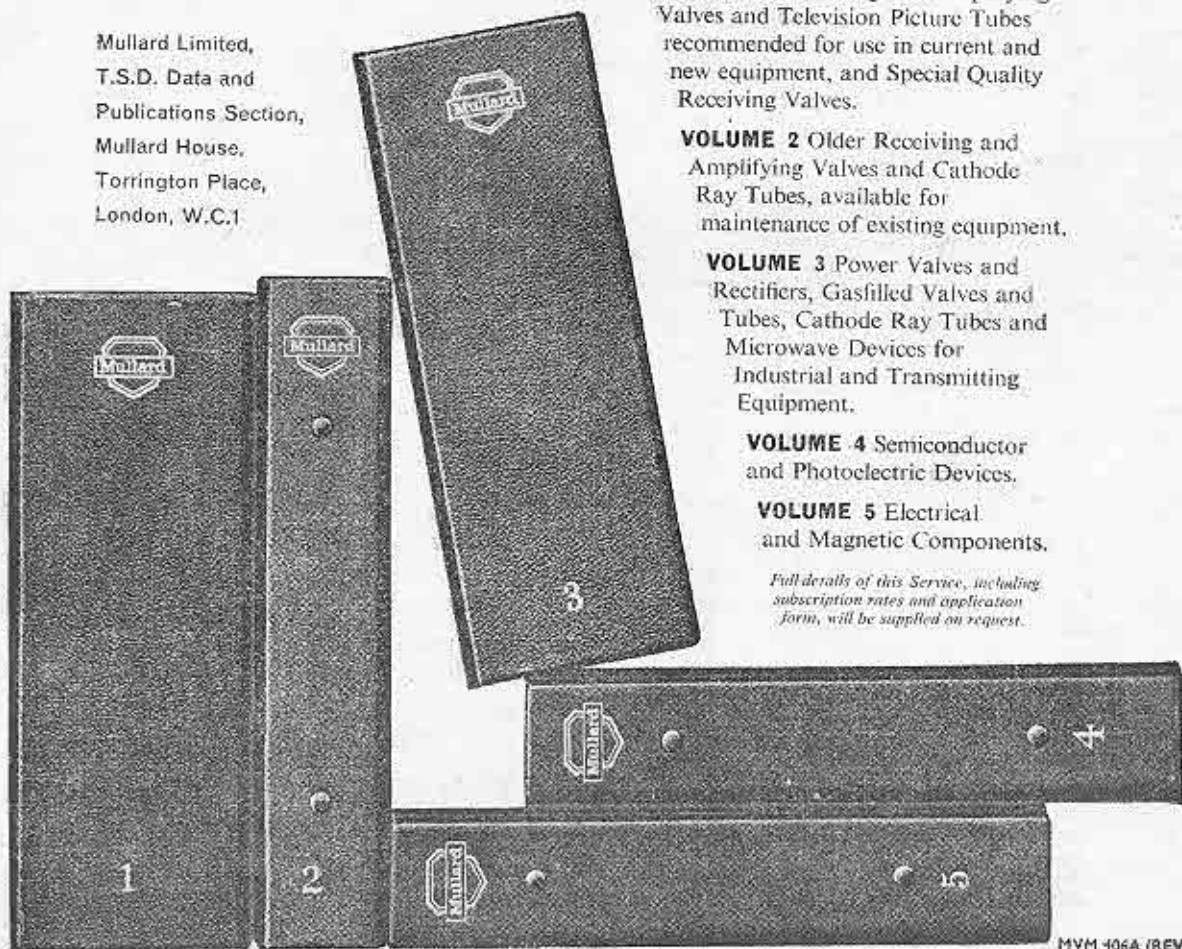

VOLUME 1 Receiving and Amplifying Valves and Television Picture Tubes recommended for use in current and new equipment, and Special Quality Receiving Valves.

VOLUME 2 Older Receiving and Amplifying Valves and Cathode Ray Tubes, available for maintenance of existing equipment.

VOLUME 3 Power Valves and Rectifiers, Gasfilled Valves and Tubes, Cathode Ray Tubes and Microwave Devices for Industrial and Transmitting Equipment.

VOLUME 4 Semiconductor and Photoelectric Devices.

VOLUME 5 Electrical and Magnetic Components.

Full details of this Service, including subscription rates and application form, will be supplied on request.

MVM 406A (REV)


Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
6C5	IO-20	59, 60, 62, 65, 66	6J5, L63	6H1	B7G-76	9		6S6	IO-13	25	
6C6	UX6-2	15, 18, 23		6H4	IO-56	45		6S7	IO-8	25	
6C7	UX7-9	67		6H5	UX6-11	90	6U5, 6G5	6S8	IO-34	68	
6C8	IO-28	67		6H6	IO-53	44, 45	D63	6SA7	IO-6	9, 13, 14	
6C9	B8A-3	8		6H8	IO-15	25		6SA7GT,G	IO-7	9, 14	
6C10	B8A-3	8	62TH, X150, ECH42	6J4	B7G-30	67		6SB7Y	IO-6	14	
6C12	B9A-24	9		6J5	IO-20	60, 62, 65, 66	L63, 6C5	6SC7	IO-25	59, 68	
6C31	IO-3	8	6K8, OM10, X65, ECH35	6J6	B7G-17	60, 62, 66, 67, 68, 70	ECC91	6SD7	IO-10	25	
6CB6	B7G-32	16, 25		6J7	IO-8	15, 16, 18, 22, 24	KTZ63, Z63	6SE7	IO-10	25	
6CD6	IO-39	26, 37, 42		6J8	IO-3	14		6SF5	IO-21	67	see 6F5
6CH6	B9A-19	16, 26, 37	EL821, 7D10 ¹⁰	6K4	Wires	67		6SF7	IO-71	25	
6CJ5	B8A-7	18, 24	EF41, 6F15	6K5	IO-19	67		6SG7	IO-14	16, 18	
6CJ6	B9A-17	43		6K6	IO-36	26, 27, 29, 36, 37, 38		6SH7	IO-14	16, 18, 25	
6CK5	B8A-23	35, 38, 41	EL41	6K7	IO-8	15, 16, 18, 22	KTW63, W63	6S17	IO-10	18, 24	
6CK5	B8A-23	29	see EL41	6K8	IO-4	7, 9, 12, 13	X65, X61M, X147	6SK7	IO-10	16, 18, 22, 24	
6CQ6	B7G-21	24		6K25	IO-20	95		6SL7	IO-26	59, 60, 62, 66	ECC35
6CT7	B8A-12	18, 24	see EAF42	6L1	B8A-13	61		6SN7	IO-26	59, 60, 62, 65, 66	ECC32
6CU7	B8A-3	13	ECH42	6L4	—	67		6SQ7	IO-31	62, 66	see 75
6CV7	B8A-9	66	EBC41	6L5	IO-20	67		6SR7	IO-31	68	
6CW7	B9A-28	60	see ECC84	6L6	IO-36	26, 27, 28, 29, 32, 35, 37, 38, 40, 41		6SS7	IO-10	16, 18	
6D1	B3G-1	44	EA50, SD61	6L7	IO-2	14	X64	6ST7	IO-31	68	
6D2	B7G-18	44	D77, DD6, D152, EB91, 6AL5, DD6G	6L12	B9A-39	62		6SU7	IO-26	68	
6D3	B7G-50	44		6L13	B9A-1	62		6SV7	IO-71	25	
6D4	B7G-24	96		6L18	B8A-6	61		6SZ7	IO-31	68	
6D6	UX6-2	15, 18, 23		6L19	B8A-13	61		6T5	UX6-11	90	
6D7	UX7-11	25		6L34	B7G-24	61		6T6	IO-9	25	
6D8	IO-1	14		6LD3	B8A-9	61	EBC41	6T7	IO-29	68	
6DA6	B9A-36	15, 19	see EF89	6LD12	B9A-2	62	6AK8, EABC80, 6T8, DH719	6T8	B9A-2	59	EABC80, 6AK8, DH179
6E5	UX6-11	90		6LD13	B9A-54	62		6TH8	IO-3	13	
6E6	UX7-5	42		6LD20	B8A-9	61		6U4	IO-109	102	
6E7	UX7-11	25		6M1	IO-46	88	6U5G, 63ME, VFT6, Y63	6U5	UX6-11	88, 90	6G5, 6H5
6E8	IO-1	13		6M2	IO-135	88		6U5G	IO-46	88, 89	
6EH6	B7G-32	25		6M6	IO-36	35	EL33, 6AG6, 6P25, N147	6U6	IO-36	36	
6EH7	B9A-10	24		6M7	IO-8	25		6U7	IO-8	15, 18	KTW63, W63, 6J7, 6K7
6F1	B8A-17	17, 61		6M8	IO-17	25		6U8	B9A-25	13	ECF82
6F4	—	67		6N4	B7G-37	67		6V4	B9A-31	71, 72, 75	see EZ80
6F5	IO-18	67		6N5	UX6-11	90	see 6AB5	6V6	IO-36	26, 27, 29, 33, 35, 37, 38, 40, 41	
6F6	IO-36	26, 29, 33, 35, 37, 38, 40, 41	KT63	6N6	IO-23	36	see 6B5	6V7	IO-29	68	
6F7	UX7-13	7, 14		6N7	IO-22	26, 37, 42, 59, 62, 67	6A6	6W2	Wires	86, 87	SU61, R12A, EY51, U151, U43, EY50, R12
6F8	IO-28	62, 67		6N8	B9A-12	15, 19, 24	EBF80, WD709, ZD152	6W4	IO-109	76	
6F11	B8A-8	17, 61		6P1	IO-36	28		6W5	IO-54	76	
6F12	B7G-21	17, 61	Z77, 8D3, 6AM6, EF91, SP6	6P5	IO-20	67		6W6	IO-36	36	
6F13	B8A-8	17, 61		6P7	IO-76	14	see 6F7	6W7	IO-8	25	
6F14	B8A-8	17		6P8	IO-4	14		6X2	Wires	87, 88	EY51, R12, R12A
6F15	B8A-8	17	EF41, W150, 6C15, 62VP	6P15	B9A-16	28, 38	N709, EL84, 6BQ5	6X4	B7G-31	71, 72, 74, 75	U78, EZ90
6F16	B8A-18	17		6P17	B7G-63	28		6X5	IO-54	71, 72, 74, 75	U70, U147, EZ35
6F18	B9A-10	17		6P25	IO-36	28, 38	6AG6, EL33, N147, 6M6	6X6	IO-46	90	
6F19	B9A-10	17		6P28	IO-38	43		6Y3	IO-102	88	
6F20	B9A-10	18		6P12	B9A-37	28, 62		6Y5	UX6-12	76	
6F21	B7G-21	18		6Q5	IO-20	97		6Y6	IO-36	29	
6F22	B9A-23	18		6Q6	IO-30	68		6Y7	IO-22	42	
6F23	B9A-10	18, 61		6Q7	IO-29	59, 60, 62, 65, 66	DH63, DH147	6Z3	UX4-3	76	
6F24	B9A-10	18, 61		6R6	IO-12	25		6Z4	UX5-5	75	
6F25	B9A-10	18		6R7	IO-29	59, 66, 68	DL63	6Z5	UX6-13	76	
6F26	B9A-10	18		6S2	B9A-50	87	see EY86	6Z7	IO-22	42	
6F32	MO-11	17		6S4	B9A-7	68		6ZY5	IO-54	76	
6F33	B7G-21	16, 18						7A2	B5-7	26, 37	APP4A, MPT4, MKT4/5, Pen4VA
6FD12	B9A-12	18									(Continued)
6FG6	B9A-55	89									
6G5	UX6-11	88, 90	6U5, 6H5								
6G5G	IO-46	89	Y63, 63ME, VFT6								
6G6	IO-36	36									

AEI Silicon Junction Rectifiers

- * Resistant to shock and vibration
- * Completely reliable
- * Fully 'tropicalised'

SOME OF THE APPLICATIONS:

- Rectification ● Control
- Magnetic amplifiers
- Brushless alternators
- Power packs ● Blocking duties.

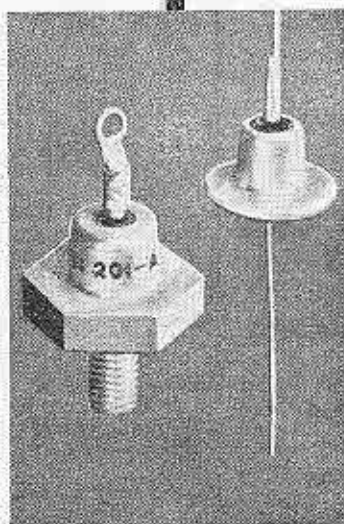

Ratings

TYPE	P.I.V. volts	TYPE	P.I.V. volts	TYPE	P.I.V. volts	TYPE	P.I.V. volts	TYPE	P.I.V. volts
MAXIMUM CURRENT AT 25°C									
0.7 amp.		1.0 amp.		1.5 amp.*		2.3 amp.*		10 amp.*	
SJ051B	50	SJ052B	50	SJ051A	50	SJ052A	50	SL101A	100
SJ101B	100	SJ102B	100	SJ101A	100	SJ102A	100	SL201A	200
SJ201B	200	SJ202B	200	SJ201A	200	SJ202A	200	SL301A	300
SJ301B	300	SJ302B	300	SJ301A	300	SJ302A	300	SL401A	400
SJ401B	400	SJ402B	400	SJ401A	400	SJ402A	400		
SJ501B	500			SJ501A	500				
SJ601B	600			SJ601A	600				
MAXIMUM JUNCTION TEMPERATURE									
120°C		200°C		120°C		200°C		150°C	

* When mounted on suitable cooling fin

Write for full details to:



Associated Electrical Industries Limited
Electronic Apparatus Division
 VALVE AND SEMICONDUCTOR SALES
 LINCOLN, ENGLAND

AS12

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
(Continued)	B7-24	26, 37	ACPen, Pen4VA, APP4A, KT42, MPPen, MKT4/7	8A1	{ B5-2 } { B7-5 }	15	MSP4/5 or MSP4/7, A50A, SPT4A, MS/Pen, AC/SG, SP4	11A1	B9A-62	28	DDT, MHD4, H4D
7A3	B7-24	26	MP/Pen, PT4, KT41, N41, AC2/Pen, PenA4, Pen4VB, 420T, APP4B	8D2	B7-6	15	13SPA, SPI3C, SPI320, SPTA	11A2	B7-7	59	13DHA, HAD, HLDD1320, TDD13C, 202DD
7A4	B8B-15	68		8D3	B7G-21	15	see 6AM6, EF91, Z77, 6F12, SP6 see 6BR7	11D3	B7-7	59	
7A5	B8B-10	36		8D5	B9A-35	15		11D5	B7-7	59	
7A6	B8B-11	45		8D8	B9A-23	15		11E1	MO-20	38	
7A7	B8B-3	25		9A1	{ B5-2 } { B7-5 }	15	MVS/Pen, VPTA, VMP4, AC/SGVM, AC/VPI, VP4, VP4A, VPT4	11E13	B9A-29	69	
7A8	B8B-9	14		9A8	B9A-25	14	LZ319, 30C1, PCF80, 8A8	11Z4	IO-55	76	
7AB7	B8B-46	25		9A8/PCF80	B9A-25	9		12A5	UX7-7	36	
7AC7	B7G-16	25, 67	see 6AH6	9AQ8	B9A-39	62	see PCC85	12A6	IO-36	26, 29, 35	
7AD7	B8B-3	25		9BW6	B9A-19	26, 37		12A7	UX7-3	36	
7AF7	B8B-14	68		9D2	B7-6	15	13VPA, VPI322, VPI3C	12A8	IO-1	14	
7AG7	B8B-3	25		9D6	B7G-21	15, 21	W77, EF92, VP6, 6CQ5	12AC5	B8A-7	24	UF41
7AH7	B8B-3	25		9D7	B9A-10	15		12AC6	B7G-16	15	
7AN7	B9A-28	60, 61, 62, 67	PCC84, 30LI, B319 see 6F5	9U8	B9A-25	14	PCF82	12AD6	B7G-29	7	
7B4	B8B-15	67		9U8/PCF82	B9A-25	9		12AE6	B7G-19	60	
7B5	B8B-10	36		10C1	B8A-3	9	X145	12AH7	IO-27	68	
7B6	B8B-2	59, 68	DH81	10C2	B8A-19	9		12AH8	B9A-9	7	
7B7	B8B-3	15, 16, 18, 21	W149, EP22	10C14	B9A-24	9		12AL5	B7G-18	45	
7B8	B8B-9	14		10D1	B5-3	44	ZD, 2D13C, DD13, C20C	12AT6	B7G-19	60, 64, 67	HBC90
7C4	B8B-23	45		10D2	B7G-18	44		12AT7	B9A-1	60, 66	B152, B309, ECC81
7C5	B8B-10	26, 27, 28, 29, 32, 37, 38	N148	10F1	B8A-17	17		12AT7/ECC81	B9A-1	62	12AT7, B152, B309, ECC81
7C6	B8B-2	59, 60, 62, 64	DH149	10F3	B8A-8	17		12AU6	B7G-16	15	
7C7	B8B-3	25		10F9	B8A-8	17		12AU7	B9A-1	60, 63, 64, 66	B329, ECC82
7D3	B7-24	26	40PPA	10F18	B9A-10	18		12AU7/ECC82	B9A-1	62	B329, ECC82, 12AU7
7D5	B7-24	26, 37	N30, PP13A, KT30, PTA	10FD12	B9A-12	18		12AV6	B7G-19	60, 67	
7D6	B7-24	26	Pen 3520, Pen 36C, PP35, Pen 383	10L1	B7G-24	61		12AW6	B7G-14	25	
7D7	B8B-8	14		10L14	B9A-39	62		12AW7	B7G-32	25	
7D8	B7-24	26	PTA, Pen 1340, Pen 13C	10LD3	B8A-9	61		12AX7	B9A-1	60, 63, 66	B339, ECC83
7D9	B7G-25	26	see 6AM5	10LD11	B8A-9	61		12AX7/ECC83	B9A-1	62	12AX7, ECC83, B339
7D10	—	16, 26, 37	see 6CH6	10LD12	B9A-2	62		12AY7	B9A-1	68	
7E5	B8B	68		10LD13	B9A-54	62		12B6	IO-30	68	
7E6	B8B-12	68	see 6R7	10M1	IO-46	88		12B7	B8B-3	25	
7E7	B8B-13	25		10M2	IO-136	88		12B8	IO-16	25	
7F7	B8B-14	68		10P13	B8A-7	28, 38		12BA6	B7G-16	16, 24	HF93
7F8	B8B-20	68		10P14	IO-36	28, 38		12BA7	B9A-3	14	
7FC7	B9A-28	67		10P18	B9A-16	29		12BD6	B7G-16	25	
7G7	B8B-3	25		10PL12	B9A-37	29, 62		12BE6	B7G-29	7, 14	HK90
7G8	B8B-18	25						12BF6	B7G-19	68	
7H7	B8B-13	15, 18, 21	W148, W81					12BH7	B9A-1	60, 61	
7HG8	B9A-64	14	PCF86					12BL6	B7G-16	16	
7J7	B8B-8	14						12C8	IO-15	15, 18	
7K7	B8B-21	59, 62						12E1	IO-38	28	CV 34-5
7L7	B8B-3	25						12E5	IO-20	68	
7R7	B8B-13	15, 18						12E13	IO-36	38	
7S7	B8B-8	7, 8, 9	X148, X81, 717					12F5	IO-18	68	
7T7	B8B-3	25						12G7	IO-29	68	
7V7	B8B-3	25						12H6	IO-53	44	
7W7	B8B-19	25						12J5	IO-20	67	
7X7	B8B-22	68						12J7	IO-8	15, 18, 22, 24	
7Y4	B8B-1	71, 72, 74	U149, U82					12K5	B7G-69	26	
7Z4	B8B-1	70, 72	U82					12K7	IO-8	15, 18, 22, 24	KTW74M, W76
								12K8	IO-4	7, 9, 12, 14	X71M, X76M
								12L8	IO-41	36	
								12Q7	IO-29	59, 62, 65	DH76
								12S7	B8A-12	24	
								12S8	IO-34	68	
								12SA7	IO-6	14	

TEXAS offers you the most complete range of silicon transistors

SILICON TRANSISTORS FOR INDUSTRIAL APPLICATIONS

NPN General Purpose
8 Mc/s · 25 V · 100 mW

NPN High-Gain General Purpose
Beta 60-250 · 16 Mc/s · Low cost

NPN Medium Power
600 mW · 200 mA · 40 V · 5 Mc/s

PNP Alloy Junction General Purpose
Low bottoming voltage
(100 mV typical at 10 mA)

SPECIAL QUALITY SILICON TRANSISTORS

NPN Small Signal and Switching
Grown Junction
Up to 45 V, 150 mW, 20 Mc/s

NPN Medium Power
Up to 100 V, 4 W

NPN Diffused Base "Mesa" Switching
50 V, 1.2 W, 150 Mc/s

NPN Power
Up to 70 V, 60 W, 5 Mc/s
D.C. current gain up to 50

GERMANIUM TRANSISTORS

PNP Diffused Base U.H.F.
15 dB gain at 100 Mc/s, 3-6 dB noise figure,
15 V, 500 Mc/s

PNP Diffused Base "Mesa"
Switching & Computer
15 V, 300 mW, 300 Mc/s

PNP Power
Up to 80 V, 25 A, 10 Mc/s

SILICON DIODES AND RECTIFIERS

General Purpose Rectifiers
Up to 600 V, 3 A

High Voltage Rectifiers
6500 V, 300 mA

"Mesa" Computer Diodes
4 nsec, 75 V, 75 mA

Controlled Rectifiers
3 A, 50 V to 400 V

Zener Voltage Reference Diodes
400 mW, 3.3 V to 15 V

Zener Voltage Regulator Diodes
8 W, 15 V to 150 V



Photo Diodes & Light Sensors

SENSISTOR SILICON RESISTORS

Temperature Compensating
Positive temperature coefficient $+0.7\%/^{\circ}\text{C}$

Temperature Sensing
From -180°C to $+200^{\circ}\text{C}$

The widest range of Silicon Transistors and other Semiconductor Devices

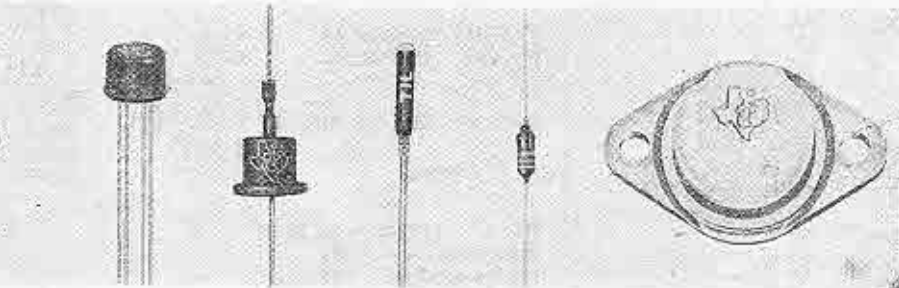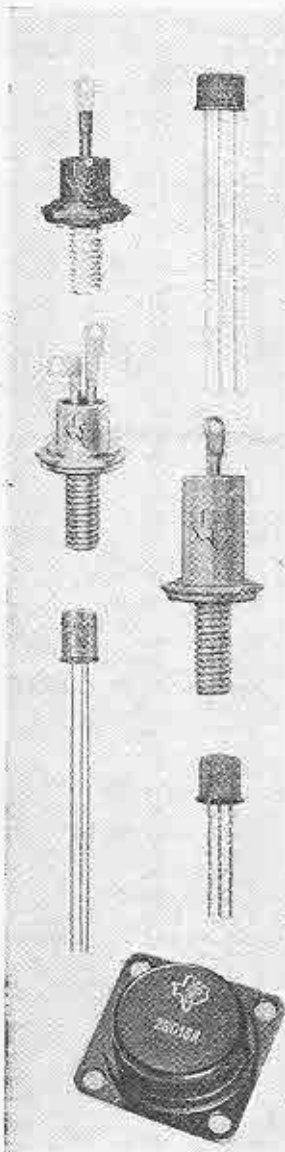


TEXAS



INSTRUMENTS LIMITED

MANTON LANE · BEDFORD · ENGLAND
BEDFORD G7466 · CABLES: TEXINLIM, BEDFORD

91/A40

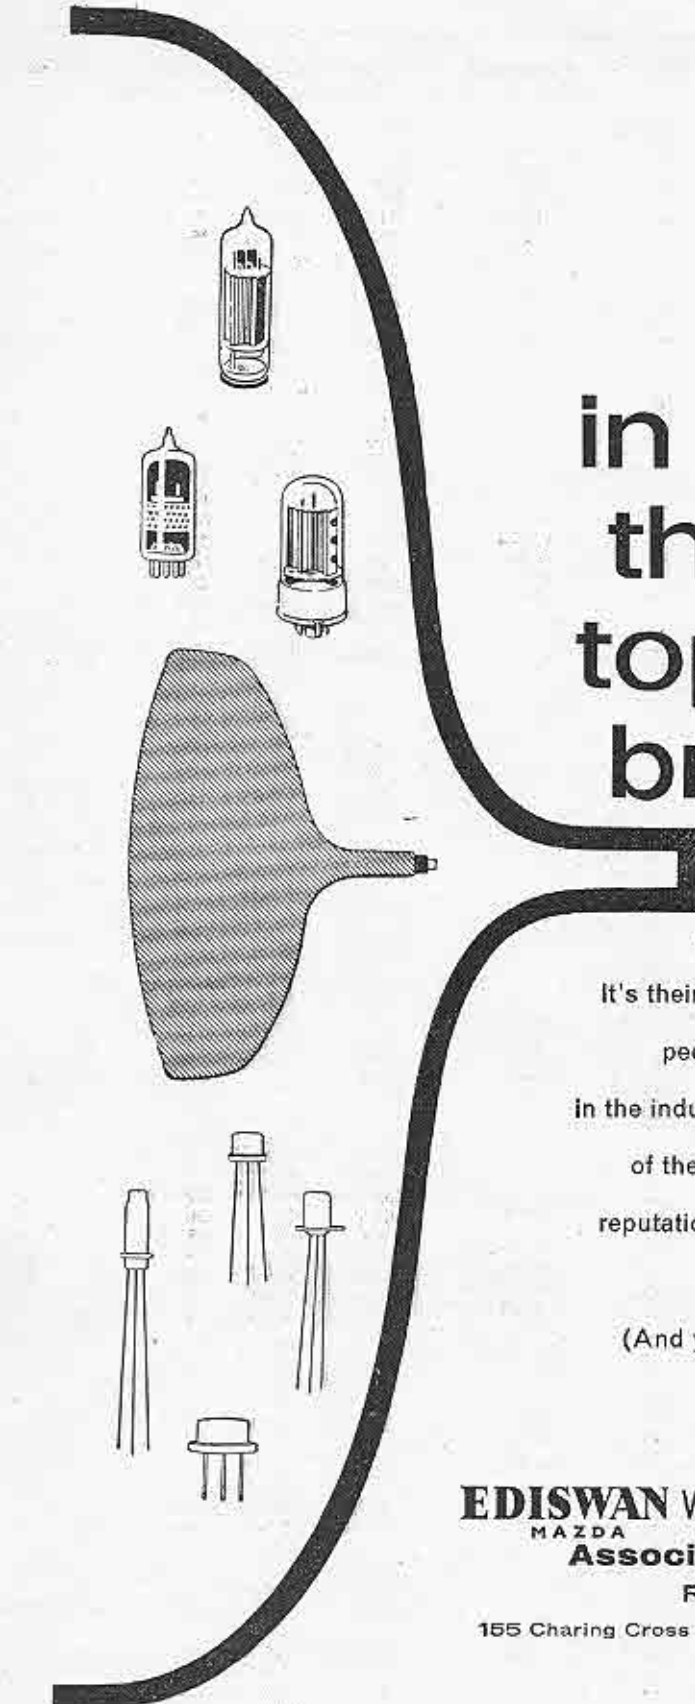

in the top bracket


Ediswan Mazda TV tubes go into many
of the very best sets—sets in the top bracket.

It's their natural place after all. Look at their
pedigree; it includes the most famous names
in the industry. See where they came from; some
of the finest factories in the country. Look at their
reputation—peerless! No wonder top bracket sets
fit Ediswan Mazda Cathode Ray Tubes.
(And you can say all that again for the
valves and semiconductors).

EDISWAN VALVES, C R TUBES & SEMICONDUCTORS
MAZDA
Associated Electrical Industries Ltd
Radio & Electronic Components Division
155 Charing Cross Road, London W.C.2 Telephone: GERRard 9797

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
30P18	B9A-16	29		42MPT	B7-5	16, 42		80	UX4-3	71, 72, 74, 75	
30P19	IO-129	43		42OT	B7-24	27	KT41,	80S	UX4-21	70	
30PL1	B9A-27	29, 62					Pen A4,	83	UX4-3	70	
30PL12	B9A-37	29, 38, 62					7A3,	83A1	B7G-55	92	
30PL13	B9A-37	29, 62					APP4B,	83V	UX4-22	70	
30PL14	B9A-37	29, 62					PT4,	84	UX5-5	75	see 6Z4
31A3	B8A-1	76	UY41, U142	42OTD	B7-9	27	AC/2 Pen,	85	UX6-4	59	
32L7	IO-99	36					N41,	85A1	B8B-41	92	
33A/158M	B8B-14	70					DN41,	85A2	B7G-28	90, 92, c	74, 79
33B/152M	B9G-10	70					PT4D,	85A3	Wires	92	see M8190
35A5	B8B-10	26, 27, 28					AC/2	85K	B4E-1	98, 99	
35B5	B7G-27	36		42PTB	B7-6	16	PenDD,				
35C5	B7G-42	36		42SPT	B7-5	16	DDPP4B				
35L6	IO-36	26, 29, 33, 35		42	UX6-8	26, 33, 35, 37, 38		90C1	B7G-28	92	
35RE	UX6-9	71		43	UX6-8	26, 33		95A1	B7G-40	92	
35W4	B7G-33	71, 74, 76	HY90	44A/160M	B9G-5	70					
35Y4	IO-50	76		45	UX4-1	26					
35Z3	B8B-16	71, 72		45A5	B8A-7	35, 41	UL41	101	IO-75	90	
35Z4	IO-55	71, 72, 76	U74, U76	45Z3	B7G-20	76		108C1	B7G-28	92	M8223
35Z5	IO-51	72, 74, 76		45Z5	IO-51	76		108K	B4E-1	98, 99	
35Z6	IO-53	76		46H1 to				117DDP	B9A-12	17	see UBF80
36	UX5-2	15		46H33		78		117L7	IO-44	36	
36EHT10 to				47/47E	UX5-3	26		117M7	IO-44	36	
36EHT240		80		48H1 to				117N7	IO-45	36	
36EHT20 to				48H33		78		117P7	IO-45	36	
36EHT240		88						117Z3	B7G-35	76	
36K1 to				50A5	B8B-10	26		117Z6	IO-53	76	
36K14		80		50B5	B7G-27	36		121K	B12A-1	98	
36MB1 to				50C5	B7G-42	26, 35, 37		121VP	B8A-7	17	see UF41
36MB13		80		50C6	IO-36	36		141K	B12A-1	98	see UF41
37	UX5-1	59		50CD6	IO-39	26, 37, 42					C36-24,
39/44	UX5-2	15		50L6	IO-36	26, 29, 33, 35	KT71	141TH	B8A-3	8	MW36-24,
39E10 to				50X6	B8B-11	76		142BT	IO-36	27	TR14/21
39E60		80		50Y6	IO-53	75		150B2	B7G-55	92	see UCH42
39E20 to				50Y7	B8B-49	76		150B3	B7G-40	90, 92	
39E60		88		50Z6	IO-53	76		150C2	B7G-28	92	
39K1 to				50Z7	IO-52	76		150C4	B7G-28	90, 92	M8223
39K13		80		52KU	IO-62	71, 72	R52, 5Z4, GZ30	161	Edison Screw	90	
39K1		48		53KU	IO-62	71, 72	GZ33	164V	B5-1	65	
39K2		48		54KU	IO-62	71		171DDP	B9A-12	17	see UBF80
39MA1		48		55A/165M	B8B-38	70		171K	B12A-1	98	CI7/1,
39MA2		48									17AXP4,
39MA3		48		61BT	IO-38	42		172K	B12A-10	98	MW43-64,
39MA4		48		61SPT	IO-49	16		185BT	IO-38	43	TR17/21
				62BT	IO-38	42		185BTA	IO-38	42, 43	
40PPA	B7-24	27	7D3	62DDT	B8A-9	61	see EBC41	202DDT	B7-7	60	
40SUA	B5-8	71	RZ, U4020, UR1C	62TH	B8A-3	8	see ECH42	202MPG	B7-2	7	
40Z5	IO-51	76		62VP	B8A-7	16	see EF41	202STH	B7-3	8	TH21C,
41/41E	UX6-8	26, 36		63ME	IO-46	88	Y63, VFT6, 6M1, 6U5G				TH2321
41FP	B5-1	60	ML4	63SPT	B9G-1	16	see EF50	202VP	B7-5	16	
41MH	B5-1	60		64ME	IO-48	88	EM34	202VPB	B7-6	16	
41MHL	B5-1	60	MH4, 354V, HLA2, ACHL	65K/2	B4E-1	98		203THA	B7-3	7	
			ML4, L4	65ME	B9A-41	88	EM80	210DDT	B5-5	60	MD24,
41MP	B5-1	27	15A2, MX40, VHT4, FC4, MH4105, X42	66KU	B8A-14	71	see EZ40				TDD2A,
41MPG	B7-2	7		67PT	B8A-23	27	see EL41				HZD,
											HL2IDD
41MPT	B7-5	16, 42		70A7	IO-105	36		210DET	B4-1	60	HL2
41MTA	B5-1	60		70L7	IO-43	36		210HF	B4-1	60	PM1HF,
41MTB	B5-1	60		75	UX6-4	59, 65, 66					HLB1,
41MTL	B5-1	60	V312, D4	75B1	B7G-40	92					HL2
41MTS	B7-20	16		75C1	B7G-55	92		210HL	B4-1	60	HL2
41MXP	B5-1	27		75K	B4E-1	98		210LF	B4-1	60	PM1LF,
				76	UX5-1	59					L2, L21
41STH	B7-3	8	O54V, PA1, AC/PI	77	UX6-2	15, 24		210PG	B7-1	7	X22, FC2,
			X41, TH4, 20A1, AC/TH1	78	UX6-2	15, 22, 24					VHT2A
42MP/Pen	B7-24	27	7A3, AC/2 Pen, KT41, N41, PT4	79	UX6-6	37		210RC	B4-1	60	HL2
								210SPG	B7-1	7	VHT2A

whenever

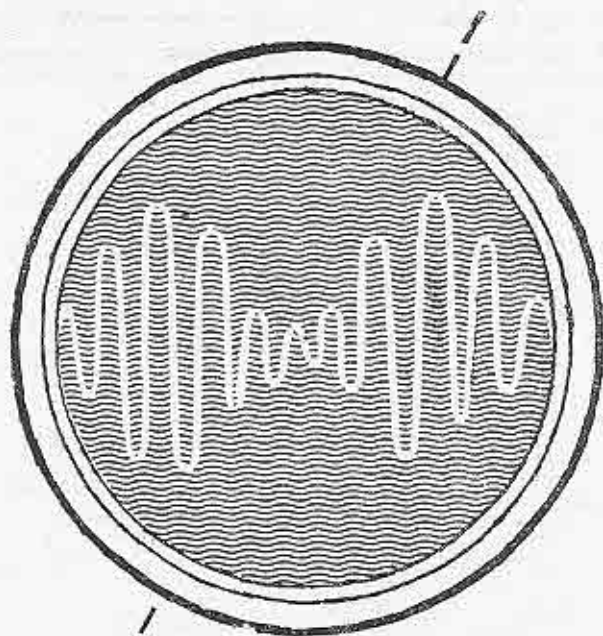

peak performance is the aim . . .

. . . Brimar valves are today's first choice, in every sphere of electronics. Whether the need is for a sub-miniature valve for service in a guided missile— or a pentode for use in a straightforward amplifier— precision-made Brimar valves promise optimum results *always*. Brimar's name for peak performance is well recognised by Britain's leading manufacturers. And this same performance makes Brimar valves first choice for replacement purposes too.

better make it



Brimar Limited

FOOTSCRAY · SIDCUP · KENT · FOOTSCRAY 3333

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
210SPT	B7-4	16	Z22, SP2, SPT2, SP210	705A	B4A-1	75		6502	IO-112	100	
210VPA	B7-4	16	W21	807	UX5-6	26, 27, 28,	QV05-25, 29, 35, 37, 5B/250A 38, 41, 68, 69, 70	6503	IO-112	100	
210VPT	B7-4	16	W21/7, VP2, VPT2, VP21, VP210	828	UX5-8	41		6504	IO-112	100	
215P	B4-1	27	P215	829B	B7A-1	69		6504A	IO-112	100	
215SG	B4-2	16	Z21, PM12, S2, S23, SG215	832A	57A-1	69		6505	IO-112	100	
220B	B7-10	37		866A	UX4-9	75		6505A	IO-112	100	
220DD	B5-3	44		884	IO-20	97		6506A	IO-112	100	
220HPT	B5-6	27	KT2, PT2	885	UX5-1	97		6703A	IO-112	100	
220OT	B5-6	27	KT2, PM22A, Pen B1, PT2, Pen 220	904V	B5-1	65	MH41	6704A	IO-112	100	
220P	B4-1	27	LP2, PM2, P2	1629	IO-46	88, 89, 90		6705A	IO-112	100	
220PA	B4-1	27	LP2, PM2A, PB1, P220, L2	2151	UX6-8	26, 37		6706A	IO-112	100	
220PT	B5-6	27	PM22C, Pen 220A	2201PT	B7-26	16		6801A	IO-112	100	
220SG	B4-2	16	Z21	4033L	B5-1	70		6802A	IO-112	100	
220SPB	B7-6	16		4043C	UX4-1	70		6870	B9A-44	15, 68	
220TH	B7-34	7	X42, TH2	4061A	UX7	70		6901A	B12A-5	100	
220VS	B4-2	16	W21/4, VS2	4074A	UX7-12	70		7032	B7G-29	15	
225DU	B7-31	71		4274A	UX4-3	75		7101A	IO-112	100	
230PT	B5-6	27		4300A	UX4-1	70		7102A	IO-112	100	
230XP	B4-1	27	P2, LP2	4313C	UX4-22	96		7201A	B12A-5	100	
240B	B7-10	37	QP21, QP22B, QP22, QP230	4304CB	B4-16	70		7203A	B12A-5	100	
240QP	B7-11	37		4687	C18-22	92		7204A	B12A-4	100	
301	Edison	90		4687A	B4-12	92		7205A	B12A-19	101	CME1402
302	Edison	90		5636	B8D-8	23	see EF730	7401A	B12A-5	100	
302THA	B7-3	8	TH30C	5644	B8D-12	92		7404A	B12A-4	100	
303	Edison	90		5651	B7G-28	91	see QSI209	7405A	B12A-4	100	
304	Edison	90		5696	B7G-46	97		7406A	B8H-1	101	CME1703
305	Edison	90		5726	B7G-18	44		7475	B4-12	92	CME1705
310EA1		48		5749	B7G-16	15	see 6BA6	7502A	B12A-4	101	
311SU	B8A-5	71	see UY41	5750	B7G-29	7	see 6BF6	7503A	B8H-1	101	CME2101
322 Pen	IO-36	27	see CL33	5763	B9A-11	26, 37, 68	QV03-12, 6062	7504A	B8H4-1	101	
354V	B5-1	65	MH4, 41MHL, D4	5840	B8D-14	23	see EF732	13201A	B4-12	92	
402GT	B7-15	27		5899	B8D-14	23	see EF731	96497	—	78	
402P	B7-23	27		5902	B8D-14	33	see EL71	9749730	—	78	
402 Pen	B7-15	27		5965	B9A-1	59		A10AA	—	82	
402 PenA	B7-15	27		6021	B8D-15	65	see ECC70	A10BA	—	82	
405BU	B4-5	86		6057	B9A-1	60	see 12AX7	A11AA	—	82	
431U	B4-5	71		6058	B7G-8	44		A11BA	—	82	
441U	B4-5	71		6059	B9A-35	15	see 6BR7	A12AA	—	82	
442BU	B4-5	71		6060	B9A-1	60	see 12AT7	A12BA	—	82	
451PT	B8A-23	27	see UL41	6061	B9A-19	26	see 6BW6	A13AA	—	82	
451U	B4-5	71		6062	B9A-11	26, 68	see 5763	A13BA	—	82	
460BU	B4-5	71	RE, U14, R3, R4A	6063	B7G-31	71	see 6X4	A14AA	—	82	
506BU	B4-5	71	U10, DW2, R1	6064	B7G-21	15	see 6AM6	A14BA	—	82	
629	UX5-1	97		6065	B7G-21	15	see 9D6	A23AA	—	82	
				6066	B7G-19	60	see 6AT6	A23BA	—	82	
				6067	B9A-1	60	see 12AU7	A24AA	—	82	
				6132	B9A-19	26	see 6CH6	A24BA	—	82	
				6146	IO-134	68		A25AA	—	82	
				6157	B9A-30	70	see R17	A25BA	—	82	
				6158	B9A-1	60	see 13D3	A34AA	—	82	
				6267	B9A-23	24		A34BA	—	82	
				6351	B9A-46	21	see Z319	A34BB	—	82	
				6443	B9A-30	71	see R18	A1714	B7G-81	63	
				6501	IO-112	100		A2087	B7G-80	45	
								A2134	B7G-33	30, 39	
								A2244	coalial	69	
								A2272	B9G	73	
								A2521	B9A-70	63	
								A2599	B9A-71	63	
								A2688	B7G-24	63	
								AC/2 Pen	B7-24	28	7A3, 420T, PT4, KT41, Pen A4, APP4B

Get to know the range of **STC COMPONENTS**

Write or telephone
for
booklet (M/103)



YOU CAN RELY ON STC COMPONENTS

Brimistors
Capacitors Ferrites
Germanium Diodes
Germanium Photocells
Hermetic Seals
High Stability Resistors
Magnetic Materials
Quartz Crystals
Special Valves
Selenium Rectifiers
Silicon Rectifiers
Silistors Suppressors
Transistors Thermistors
Tunnel Diodes
Transformers Zener Diodes




50/411

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London W.C.2.

COMPONENTS GROUP FOOTSCRAY SIDCUP - KENT
FOOTSCRAY 3333 EXTENSION 322

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
AC/2Pen-DD	B7-9	28	420TDD, PT4D, DN41, DDPP4B	APP4g*	B7-15	34		BU65/10	Edison Screw	90	
AC/4Pen	B7-24	28	Pen 4B, APP4E PT10, N41	APV4	B4-14	75	R3, 431U, R42, MU14, UU5, IW4/500	BU78/10	B4-20	90	
AC/5Pen	B7-24	28		AR2	—	77		BU115/22	B4-20	90	
AC/5Pen-DD	B7-9	28		AS4120	B5-2	23	MS4B, SPT4A	BU200/14	B4-20	90	
AC/6Pen	B7-36	42		AS4125	B5-2	23		BU280/20	B4-13	90	
AC/DD	B5-3	44	D41	ASZ20	—	51		BU600/6	Edison Screw	90	
AC/ME	B7-19	88		ATZ10	—	51		BYZ12	—	84	
AC/P	B5-1	28		AW36-20	B12A-17	101		BYZ13	—	84	
AC/VPen	B7-24	28	MKT4/7, 7A2	AW36-21	B12A-17	101	C14/3, C14PM, SE14/70	BZZ10	—	94	
AC/S1VM	B5-2	17		AW36-80	B12A-17	101		BZZ11	—	94	
AC/S2	B5-2	17	MS4B, SPT4A	AW43-80	B12A-17	98, 101	C17/5A C17/7A	BZZ12	—	94	
AC/S2Pen	B7-5	17		AW43-88	B8H-1	98, 101		BZZ13	—	94	
AC/SG	B5-2	17		AW43-89	B8H-2	101		C2D	—	77, 79	
AC/SG/VM	B5-2	17		AW53-80	B12A-17	101		C2H	—	77, 79	
AC/SP1	B7-5	17		AW53-88	B8H-1	98, 101		C2V	—	77, 79	
AC/SP3	B7-6	17		AW53-89	B8H-2	101		C3B	—	77, 79	
AC/TH1	B7-3	8	20A1, 41STH, X41, TH4A, TH4B	AX50	B4-5	74		C3D	—	77, 79	
AC/TH1A	MO-12	8		AZ31	IO-60	74, 75		C3H	—	77, 79	
AC/TP	B9-2	8		AZ31/U143	IO-60	74		C3V	—	77, 79	
AC/VP1	B7-5	17	9A1, MVS Pen, VPT4, VMP4G, HP4106C	AZ41	B8A-26	75		C9A	—	97	GRM92, CRM91
AC/VP2	B7-6	17	MVS Pen B, VPT4B, W42					C9B	—	97	
AC2HL	B5-1	61	MH41	B10AA	—	82		C12/I	B12A-1	97	MW31-74
ACDD	B5-3	45	D41	B10BA	—	82		C12A	—	97	CRM121
ACDDT	B7-7	64		B11AA	—	82		C12B	—	97	12MW3A
ACHL	B5-1	61, 64	MH4	B11BA	—	82		C12D	—	97	12MW3
ACHLDD	B7-7	61	MHD4	B12AA	—	82		C12E	—	97	
ACHL-DDD	B9-5	61		B12BA	—	82		C12FM	B12A-1	97	121K, 12XP4, MW31-16
ACL	B5-1	31		B13AA	—	82		C14/3	B12A-2	97	AW36-21, C14PM, SE14/70
ACO42	B4-1	32		B13BA	—	82		C14/13A	B12A-2	98	
ACPI	B5-1	28		B14AA	—	82		C14BM	B12A-5	97	
ACP4	B5-9	61		B14BA	—	82		C14FM	B12A-9	97	
ACQ	B7-24	31		B18-1-IRW	—	79		C14LM	B12A-11	97	
ACVP	B5-2	20	VPT4B	B18-14-IRW	—	79		C14PM	B12A-11	97	C14/3, AW36-21, SE14/70
ACVP	B7-5	20		B23AA	—	82		C15B	—	97	15MW3A
ACVPB	B7-6	20		B23BA	—	82		C17/I	B12A-1	97	171K, 17AXP4, MW43-64, TR17/21
ACY	B5-7	31		B24AA	—	82		C17/1A	B12A-1	97	MW43-69, TR17/22
ACY	B7-24	31	MKT4	B24BA	—	82		C17/4A	B12A-1	98	MW43-80
ACZ	B5-7	31	KT41	B25-1-1W	—	79	12SN7	C17/5A	B12A-2	98	AW43-80
ACZ	B7-24	31	PT4	B25-14-IRW	—	79		C17/7A	B8H-1	98	AW43-88
ACZDD	B7-9	31	PT4DD	B34-BA	—	82		C17AA	B8H-2	97	
AFX203	UX4-24	96		B36	IO-26	63, 64	6SN7	C17AF	B8H-2	97	
AFX234	B7G-24	96		B45-1-1W	—	79		C17BM	B12A-5	97	
AFZ11	—	51		B65	IO-26	63, 64	see UCC85	C17FM	B12A-9	97	
ANI	B5-1	96		B109	B9A-39	63		C17JM	B12A-11	97	
APP4A	B5-7	34	7A2, MKT4/5, Pen 4VA	B230	B7-10	39		C17LM	B12A-11	97	
APP4A	B7-24	34	7A2, MKT4/7, AC Pen, Pen 4VA	B309	B9A-1	63, 64	see ECC81	C17PM	B12A-11	97	
APP4B	B7-24	34	7A3, 42MP Pen, PT4, KT41, AC2 Pen, Pen A14	B319	B9A-28	63, 64	see PCC84	C17SM	B12A-11	97	
APP4E	B7-25	34	Pen B4	B329	B9A-1	63, 64	see ECC82	C19/7A	B8H-1	98	MW53-80, TR21/22
APP4g	B7-5	34		B339	B9A-1	63, 64	see ECC83	C21/1A	B12A-1	98	MW53-88
				B349	B9A-28	63		C21/7A	B8H-1	98	
				B719	B9A-39	63, 64	see ECC85	C21AF	B8H-2	97	
				B729	B9A-39	63		C21HM	B12A-9	97	
				BCZ11	—	51		C21NM	B12A-10	97	
				BR201	B4-13	90		C21SM	B12A-11	97	
				BR201S	C18-8	90		C21TM	B12A-9	97	
				BR202	B4-13	90		C23/7A	B8H-1	98	
				BR202S	C18-8	90		C23AG	B8H-2	97	
				BR300	Edison Screw	90		C24KM	B12A-9	97	
				BR300C	Edison Screw	90		C27/1A	B12A-1	98	
				BR1500	B4-13	90		C27/5A	B12A-2	98	
				BU10	B4-13	90					
				BU29/4	IO	90					
				BU30/6	Edison Screw	90					

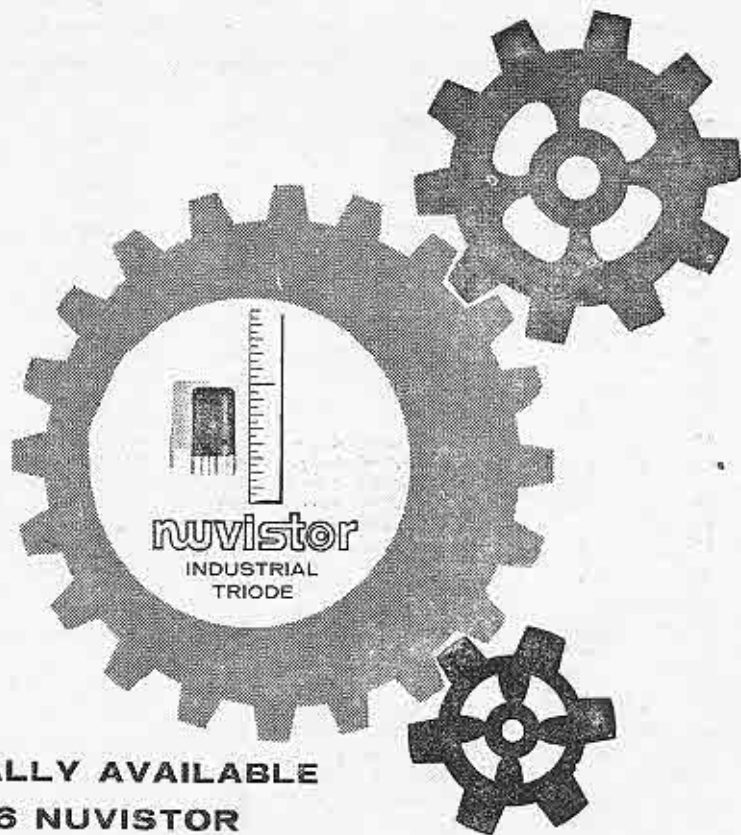

NOW COMMERCIALY AVAILABLE
RCA-7586 NUVISTOR
GENERAL-PURPOSE INDUSTRIAL TRIODE

The nuvistor — the electron tube of the future — is available *now*.

The nuvistor concept, first announced by RCA in the Spring of 1959, was hailed as a major advance in electron-tube technology. Now the first commercial nuvistor, RCA-7586, a general purpose, medium- μ industrial triode, opens new vistas to designers of compact electronic equipment. It is capable of providing high gain with low noise as an amplifier and has exceptional stability as an oscillator over a wide range of frequencies. RCA-7586 . . . for communications, control and instrumentation, TV cameras, medical diagnosis, test and measurement and other critical industrial applications.

RCA-7586 incorporates the unique design advantages shown at right to assure dramatic improvements in efficiency, performance, reliability, flexibility of installation, and economy in circuit design.

Advantages:

Extreme ruggedness — all-ceramic-and-metal construction — all connections brazed at very high temperatures to eliminate structural strain and element distortion often caused by welding . . . exhaust and seal-off at very high temperatures to eliminate gases and impurities

Small size and light weight — metal shell only 8/10" long including peripheral lugs for indexing, less than 1/4" in diameter; weight 1/15 ounce (1.9 grams)

Low heater power — well below one watt

Very high transconductance at low plate voltage and current — 11500 micromhos at 75 volts and 10.5 milliamperes

Very high input impedance

High perveance

Operation at any altitude at full ratings

Exceptional uniformity of characteristics from tube to tube

Mechanical ruggedness — will withstand impact acceleration of 1000 g, 48-hour low-frequency (60-cps) vibration at 2.5 g acceleration

Rigidly controlled during manufacture, and rigorously tested for early-hour stability, 100-hour and 1000-hour life performance; resistance to shock, low- and variable-frequency vibration, low-pressure breakdown, and heater cycling



RCA GREAT BRITAIN LTD

(An associate Company of Radio Corporation of America)

Lincoln Way, Sunbury-on-Thames, Middx.

Sunbury-on-Thames 3126

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
C36/24	B12A-1	98	141K, MW36-24, TR14/21	CV7028	—	85	see IS003	DD4	B5-3	44, 45	DDL4, SD, D41, V914, 2D4A
C178A/ 5894	B7A-1	69		CV7045	—	85	see IS111	DD4D	B7-21	45	
C1134	B7A-1	69		CV7046	—	85	see IS115	DD6	B5-3	45	
CB215	B7-10	41		CV7056	—	58	see 2S002	DD6	B7G-18	44	EB91, D77, 6AL5, DD6G, D152
CB215S	Ct8-28	41		CV7057	—	58	see 2S003	DD6G	B7G-18	45	D77, DD6, D152, EB91, D77, 6AL5
CB220	B7-10	41		CV7058	—	58	see 2S004				
CBL1	Ct8-13	33		CV7059	—	58	see 2S005				
CBL31	IO-15	35		CV7060	—	59	see 2S014				
CCH35	IO-3	12, 14		CV7061	—	59	see 2S012A				
CG1-E	—	46		CV7062	—	59	see 2S017				
CG4-E	—	46		CV7063	—	59	see 2S018				
CG6-E	—	46		CV7064	—	59	see 2S019				
CG10-E	—	46		CV7065	—	59	see 2S020				
CG12-E	—	46		CV7066	—	59	see 2S013A	DD13	B5-3	45	
CG60H	—	46		CV7099	—	95	see IS7047A	DD41	MO-13	44	
CG61H	—	46		CV7100	—	95	see IS7051A	DD101	MO-13	44	
CG62H	—	46		CV7101	—	95	see IS7056A	DD207	B4-5	44	
CG6-cl	—	46		CV7102	—	95	see IS7062A	DD465	B5-4	45	
CG64H	—	45		CV7103	—	95	see IS0768A	DD620	B5-3	44	10D1, 220DD, ZD
CL4	Ct8-4	33		CV7104	—	95	see IS7075A	DD818	B5-4	45	
CL6	Ct-84	33, 34, 40	PP37	CV7105	—	95	see IS7082A	DDL4	B5-3	44	D41, V914, 2D4A
CL33	IO-36	33, 35	322Pen	CV7106	—	95	see IS7150A				
CL33/	IO-36	27	322Pen, CL33	CY1	Ct8-5	76		DDP4B	B7-9	34	
CME141	B12A-2	98		CY31	IO-55	74, 76		DDP4M	B7-22	34	
CME1402	B12A-2	98	7205A	CY32	IO-53	74		DDPP6B	B7-9	34	
CME1702	B12A-2	98						DDPP39	B7-9	34	
CME1703	B8H-1	98	7405A	DI	B3G-1	44	T4D	DDPP39M	B7-22	34	
CME1705	B8H-2	98	7406A	D3/2/1Y	—	77		DDT	B7-7	60	11A2, H4D, MHD4, ACHLDD, TDD4
CME1706	B8H-1	98		D4	B5-1	62	MH4	DDT2	B5-5	66	
CME1901	B8H-1	98		D15	IO-75	90		DDT2B	B5-5	66	
CME2101	B8H-1	98	7503A	D41	B5-3	44, 45	DDL4, SD, V914, 2D4A, DD4, ACDD	DDT2BS	Ct8-28	66	
CME2103	B8H-1	98		D42	B4-8	44, 45	DDL4	DDT4	B7-7	66	
CME2104	B8H-2	98		D43	B4-1	45	D400	DDT13	B7-7	64, 66	MHD4, TDD13C
CME2301	B8H-1	98		D63	IO-53	44, 45	6H6	DDT13S	Ct8-7	66	
CRM71	MO-24	98	MW18-2	D77	B7G-18	45	see EB91	DET18	UX4-20	69	
CRM91	MO-24	98	C9A, MW22-3	D152	B7G-18	45	D77, DD6, EB91, 6AL5, 6D2, DD6G	DET19	UX7-12	69	4074A
CRM92	MO-24	98	C9A, MW22-3	D418	B4-10	45		DET20	IO-107	69	
CRM92A	MO-24	98	C9A, MW22-3	DA	B7-23	62	4D1, HL1320, HL13	DET22	Coaxial	69	
CRM93	B12A-1	98		DA1	Sm4-1	64		DET24	Coaxial	69	
CRM121	MO-24	98	C12A	DA2	Sm4-1	64		DET28	B9G-12	69	
CRM121A	MO-24	98	C12A	DA3	Sm4-1	65		DF1	Ct8-26	21	
CRM121B	MO-24	98	C12A	DA30	B4-1	31		DF33	IO-77	22	1N5
CRM122	MO-24	98		DA41	UX4-20	39, 40	TZ40	DF61	B5A-3	22	
CRM123	MO-24	98		DA42	4-pin	39		DF62	B5A-2	22	
CRM124	B12A-1	99		DA90	B7G-13	45		DF64	B5A-3	22	
CRM141	B12A-1	98		DAC1	Ct8-32	64		DF66	B5A-1	22	
CRM142	B12A-1	98		DAC32	IO-91	65	IH5	DF70	B8D-6	21	
CRM143	B12A-1	98		DAF70	B8D-1	21		DF72	B8D-2	21	
CRM144	B12A-1	99		DAF91	B7G-5	16, 18, 22	IS5, ZD17, 1FD9	DF73	B8D-2	22	
CRM151	MO-24	98		DAF91/ ZD17	B7G-5	21	IS5, DAF91, ZD11, 1FD9	DF91	B7G-2	16, 18, 22	1T4, W17, 1F3
CRM152A	B12A-5	98		DAF96	B7G-5	16, 22	1AH5, 1FD1, 1PI	DF91, W17	B7G-2	20	DF91, 1T4, 1F3, W17
CRM152B	B12A-5	98		DAF96/ 1AH5	B7G-5	15, 19	1FD1, 1PI, 1AH5	DF92	B7G-2	22	1L4, 1F2
CRM153	B12A-1	98		DAF96/ ZD25	B7G-5	20	DAF96, 1AH5, 1FD1, 1PI, ZD25	DF96	B7G-2	16, 22	1AJ4, 1F1
CRM171	B12A-1	98		DC70	B8D-7	69		DF96/ 1AJ4	B7G-2	15, 19	DF96, 1F1, 1AJ4
CRM172	B12A-1	99		DCC90	B7G-8	65		DF96/ W25	B7G-64	20	1AJ4, DF96, 1F1, W25
CRM173	B12A-1	99						DF97	B7G-59	12, 19, 22	
CRM211	B12A-1	98						DH30	B7-7	63, 64	HSD
CRM212	B12A-1	99						DH42	B7-7	62, 64	11A2, DDT, M4D, MHD4, ACHLDD, TDD4, DDT4
CS2A	—	46						DH63	IO-29	63, 64	6Q7
CS3A	—	46						DH76	IO-29	63, 64	12Q7
CS3B	—	46						DH77	B7G-19	63	see EBC90
CS4B	—	46						DH77/ 6AT6	B7G-19	64	DH77, 6AT6, EBC90
CS9B	—	46						DH81	B8B-12	63, 64	7B6
CV2341	Coaxial	45									
CV2398	B9A-69	45									
CV4044	B9A-30	73									
CV4071	IO-103	87									
CV7013	—	85	see IS113								
CV7027	—	85	see IS001								
CV4024	B9A		12AT7								
CV2127	B9A		CCHG								
CV4014	B7G		6064								
CV4005	B7G		6063								
CV443	B7G		EZ90								



*copper-oxide
selenium and
silicon*

rectifiers

for

RADIO · TELEVISION

AND ALL ELECTRONIC APPLICATIONS

*For full information please write to Dept. WWRD,
Rectifier Division, Unit Section*

WESTINGHOUSE BRAKE AND SIGNAL CO., LTD., 82 York Way, King's Cross, London, N.1

Tel: TERminus 6432

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	
DH101	B8B-12	63, 64		DO26	B4-1	32		EBC81	B9A-54	65, 66	6CV7	
DH107	B7G-19	63, 64		DO30	B4-1	32, 40	DA30, P30/500	EBC90	B7G-19	65	DH77, 6AT6	
DH109	B9A-2	63	see UABC80					EBC90/ DH77	B7G-19	63	EBC90, DH77, 6AT6	
DH118	B8A-9	63	see UBC41	DP61	B7G-14	19						
DH119	B9A-54	63	see UBC81	DRM1B	—	77, 79	DSM1					
DH142	B8A-9	64	see UBC41	DRM2B	—	77, 79	DSM2/3		EBC91	B7G-19	65	
DH147	IO-29	64	see EBC33	DRM3B	—	77, 79	DSM2/3		EBF2	C18-13	23	
DH149/ 7C6	B8B-2	64	DH149, 7C6	DSM1	—	79			EBF80	B9A-12	22	6N8, WD709, ZD152
DH719	B9A-2	63, 64	see EABC80	DSM2/3	—	79			EBF80/ 6N8	B9A-12	15, 19	ZD152, WD709, EBF80, 6N8
DK1	C18-31	11		DW2	B4-5	74	R1, 431U, U10, UU5, PV295		EBF80/ WD709	B9A-12	19, 21	6N8, EBF80, WD709, ZD152
DK32	IO-76	12	1A7, X14	DW4-350	B4-5	74	R3, 431U, U14, UU5, RV120/350, R4, R43					
DK40	B8A-25	12		DW4-500	B4-5	74	R3, 431U, U14, UU5, RV120/500					
DK91	B7G-3	8, 12	X17, 1R5, 1C1						EBF83	B9A-12	22	
DK91/ X17	B7G-3	10, 11	1C1, X17, DK91, 1R5	DY70	Wires	87			EBF89	B9A-12	21, 22	
DK92	B7G-54	11, 12	1AC6, X18, 1C2, X20	DY86	B9A-50	86			EBL1	C18-13	32, 34	
DK92/ 1AC6	B7G-54	8	DK92, 1AC6, X18, 1C2						EBL21	B8B-6	33, 40	DN143
DK92/ X18	B7G-54	11	DK92, X18, X20, 1AC6, 1C2						FBL21/ DN143	B8B-6	32	EBL21, DN143
DK92/ X20	B7G-54	10	1AC6, X18, 1C2, X20, DK92	E88CC	B9A-39	60, 65			EBL31	IO-15	33, 35	
DK96	B7G-54	8, 11, 12	1AB6, 1C3, X25, X109	E90CC	B7G-17	65			EC1	—	80	
DK96/ 1AB6	B7G-54	7	1AB6, 1C3, X109, DK96, X25	E180F	B9A-45	16, 22	6D1, SD61 2S/104G		EC2	—	80	
DK96/ X25	B7G-54	10	1AB6, 1C3, DK96, X25, X109	EA50	B3G-1	45			EC3	—	80	
DL2	C18-25	32		EA76	B5B-1	45			EC4	—	80	
DL33	IO-87	33	3Q5, N16	EAB1	C18-17	45			EC9	—	80	
DL35	IO-78	33	1C5, N14	EABC80	B9A-2	62, 65	DH719, 6T8, 6AK8, 6LD12		EC10	—	80	
DL63	IO-29	64		EABC80/ 6AK8	B9A-2	60, 61	EABC80, 6AK8, 6LD12, 6T8, DA719		EC11	—	81	
DL64	B5A-3	33		EABC80/ DH719	B9A-2	63, 64	EABC80, DH719, 6T8, 6AK8, 6LD12		EC12	—	81	
DL66	B5A	32							EC13	—	81	
DL68	B5A-1	33		EAC91	B7G-23	65, 66			EC15	—	81	
DL69	B5A-5	33		EAF41	B8A-11	21			EC16	—	81	
DL70	B8D-6	33, 69		EAF42	B8A-12	22			EC18	—	81	
DL71	B8D-6	32		EAF42/ 6CT7	B8A-12	18	6CT7		EC19	—	81	
DL72	B8D-6	32		EB4	C18-10	45			EC31	IO-20	32, 65	
DL73	B8D-6	33, 69		EB34	IO-53	45			EC32	B9G-3	65, 69	
DL75	B8D-6	32, 40		EB41	B8A-10	44, 45			EC33	B3G-1	65, 69	
DL82	B8B-12	63, 64		EB91	B7G-18	44, 45			EC36	—	70	
DL92	B7G-6	27, 33, 38, 40	3S4, N17, 1P10						EC37	—	70	
DL92/ N17	B7G-6	31	DL92, N17, 3S4, 1P10						EC70	B8D-8	69	
DL93	B7G-7	33, 69	3A4						EC71	B8D-16	65	
DL94	B7G-9	27, 29, 33, 34, 38	3V4, N19, 1P11						EC90	B7G-15	65	L77, 6C4
DL94/ N19	B7G-58	30, 32	3V4, 1P11, DL94, N19	EB91/ D77	B7G-18	45	EB91, D77, 6D2, 6AL5, DD6G, DD6		EC91	B7G-24	65	
DL96	B7G-9	33, 38, 40	1P1, 3C4						EC92	B7G-66	65	
DL96/ 3C4	B7G-9	26, 29, 37, 38	DL96, 3C4, 1P1						ECC32	IO-26	65	B65, ECC23, 6SN7
DL96	B7G-9	27, 32	1P1, 3C4						ECC33	IO-26	65	B65, ECC32, 6SN7
DL96/ N25	B7G-9	30	DL96, N25, 1P1, 3C4						ECC34	IO-26	65	
DL145	B8A-9	64		EBC3	C18-7	65, 66			ECC35	IO-26	65	6SL7
DL620	B5A-1	33		EBC33	IO-29	65, 66	DH147, OM4		ECC40	B8A-13	65	
DM70	B8D-9	89	1M1, Y25, 1M3	EBC33/ DH147	IO-29	64	EBC33, DH147, OM4		ECC70	B8D-15	65	
DM70/ 1M3	B8D-9	89	DM70, 1M1, 1M3, Y25						ECC81	B9A-1	61, 65	12AT7, B309 see 12AT7
DN41	B7-9	30, 31	DDPP4B, PT4D	EBC41	B8A-9	59, 62, 65	DH150, 6LD3, 62DDT		ECC81/ B309	B9A-1	62	ECC81, B309 12AT7, B152
DN143	B8B-62	32	see EBL21	EBC41/ 62DDT	B8A-9	61	EBC41, 62DDT, DH150, DH718, 6LD3		ECC82	B9A-1	61, 65	B329, 12AU7 see 12AU7
DO24	B4-1	32	PX25, PP5/400, P27/500, LP25	EBC41/ DH718	B8A-9	63	6LD3, EBC41, DH718, DH150, 62DDT		ECC82/ B329	B9A-1	64	ECC82, B329, 12AU7
									ECC82	B9A-1	61, 65	ECC82, B329, 12AU7
									ECC83	B9A-1	62	B339, 12AX7 see 12AX7
									ECC83/ B339	B9A-1	64	ECC83, B339, 12AX7
									ECC83/ B339/ 12AX7	B9A-1	63	ECC83, B339, 12AX7
									ECC84	B9A-28	61, 63, 65, 66	6CW7

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
ECC84/6CW7	B9A-28	60	ECC84, 6CW7	EF41	B8A-7	15, 16, 22	W150, 62VP, 6CJ5, 6F15	EL31	10-40	33, 40	
ECC85	B9A-39	60, 66	B719, 6AQ8	EF41/6CJ5	B8A-7	18	W150, 62VP, EF41, 6CJ5, 6F15	EL32	10-9	33, 35, 40, 41	OM9
ECC85/6AQ8	B9A-39	61		EF41/W150	B8A-18	21	EF41, W150, 62VP, 6CJ5, 6F15	EL33	10-36	33, 35, 40, 41	6AG6, 6M6, 6P25, N147
ECC85/B719	B9A-39	63, 64	ECC85, B719, 6AQ8	EF42	B8A-8	18, 22	Z150	EL33/N147	10-36	32	EL33, N147, 6AG6, 6M6, 6P25
ECC88	B9A-39	60, 66		EF42/B8A-18	B8A-18	21	EF42, Z150	EL34	10-133	33, 40	
ECC91	B7G-17	61, 66, 70	6J6	EF50	B9G-1	16, 22, 24	63SPT, Z90	EL35	10-36	33, 40	6L6
ECF80	B9A-25	7, 8, 10, 12, 13, 15, 60		EF54	B9G-2	22		EL36	10-36	34, 43	
ECF82	B9A-25	12	6U8	EF55	B9G-1	22		EL36	10-36	32	see EL6
ECF82/6U8	B9A-25	7	6U8, ECF82	EF70	B8D-3	22		EL37	10-36	33, 35, 40, 41	KT66, PP60
ECH2	C18-1	12, 13		EF71	B8D-4	22		EL38	10-40	27, 42, 43	
ECH3	C18-1	12, 13		EF72	B8D-4	22		EL41	B8A-23	26, 33, 37, 40	6CK5, 67PT, N150
ECH21	B8B-42	12	X143	EF73	B8D-5	22		EL41/6CK5	B8A-23	29, 38	6CK5, EL41, N150
FCF21/B8B-42	11		ECH21, X143	EF74	B8D-5	22		EL41/67PT	B8A-23	27	6CK5, 67PT, EL41, N150
FCF21/X143				EF80	B9A-10	16, 22	6BW7, 6BX6, Z719, Z152	EL41/N150	B8A-23	32	6CK5, EL41, N150, 67PT
FCH33	10-3	12		EF80/6BX6	B9A-10	15, 19	6BW7, 6BX6, Z719, Z152	EL42	B8A-23	27, 29, 33, 34, 38, 40, 41	EL42, N151
FCH35	10-3	12, 14	6K8, X147, X61M, X65	EF80/Z719	B9A-10	21	6BX6, 6BW7, EF80, Z152	EL42/N151	B8A-23	32	EL42, N151
ECH35/X147	10-3	11	ECH35, X147	EF85	B9A-10	16, 22	W719, 6BY7	EL50	C18-21	33, 40	
ECH42	B8A-3	7, 12	62TH, X150, 6C10, 6CU7	EF85/6BY7	B9A-10	19		EL71	B8D-14	33	
ECH42/6CU7	B8A-3	9	6CU7, ECH42, 62TH, 6C10, X150	EF85/W719	B9A-10	19		EL81	B9A-17	27, 42, 43	
ECH42/B8A-3	8		62TH, X150, 6C10, 6CU7	EF85/W719	B9A-10	19, 21	W719, EF85, 6BY7	EL83	B9A-14	33	
ECH42/X150	B8A-3	11	ECH42, 62TH, X150	EF86	B9A-23	16, 19, 22	Z729	EL84	B9A-16	33, 41	N709, 6BQ5, 6P15
ECH81	B9A-24	8, 12	X719, 6AJ8	EF86/B9A-23	19, 20, 21, 22, 24		Z729, EF86	EL84/N709	B9A-16	30, 32, 39, 40	EL84, N709, 6BQ5, 6P15
ECH81/6AJ8	B9A-24	9	6AJ8, ECH81, X719	EF89	B9A-36	16, 19, 21, 22, 24	6DA6	EL85	B9A-26	33, 35, 41, 70	6BN5
ECH81/B9A-24	10, 11		6AJ8, ECH81, X719	EF91	B7G-21	16, 22	6AM6, 8D3, Z77, 6F12, SP6	EL85/6BN5	B9A-26	29	EL85, 6BN5
ECH81/X719				EF91/B7G-21	18, 24		see 6AM6	EL86	B9A-16	27, 33	
ECH83	B9A-24	12		EF91/Z77	B7G-21	19, 21	6AM6, EF91, Z77, SP6, 8D3, 6F12	EL90	B7G-27	29, 33, 41	N727, 6AQ5
ECL80	B9A-13	30, 33, 66	LN152, 6AB8	EF92	B7G-21	22	W77, 9D6, VP6	EL90/6AQ5	B7G-27	38	EL90, 6AQ5, N727
ECL80/B9A-13	26, 27, 29, 60, 61		ECL80, 6AB8	EF92/B7G-21	19		EF92, 9D6, VP6, W77	EL90/N727	B7G-27	30, 39	EL90, N727, 6AQ5
ECL80/6AB8	B9A-13	32, 64	ECL80, LN152, 6AB8	EF93	B7G-16	22	W727, 6BA6	EL91	B7G-25	16, 33, 41	6AM5, N77
ECL80/LN152				EF93/B7G-16	19			EL91/B7G-25	29	see 6AM5	
ECL82	B9A-37	27, 29, 30, 33, 35, 66	6BM8	EF93/W727/6BA6	B7G-16	19		EL91/6AM5	B7G-25	38	EL91, 6AM5, N77
ECL82/B9A-37	26, 37, 60		ECL82, 6BM8	EF95	B7G-14	22	6AK5	EL91/N77	B7G-25	30	EL91, N77, 6AM5
ECL83	B9A-27	27, 29, 30, 33, 35, 40, 66		EF97	B7G-68	22		EL95	B7G-67	34, 35, 41	
EF5	C18-15	23		EF98	B7G-68	22, 24		EL820	B9A-17	43	
EF6	C18-15	23		EF183	B9A-10	15, 16, 22		EL821	B9A-19	34	
EF8	C18-11	21, 23		EF184	B9A-10	15, 16, 22		EL822	B9A-19	34	
EF9	C18-15	22, 23		EF730	B8D-8	23		EL1	C18-19	41	
EF22	B8B-3	22	W143, 7B7	EF731	B8D-14	23		EL180	B9A-68	27, 37	
EF22/W143	B8B-3	21	EF22, W143, 7B7	EF732	B8D-14	23		EM1	C18-9	89	
EF36	10-8	21	OM5	EFM1	C18-18	89		EM3	C18-9	89	
EF37	10-8	21, 65		EH2	C18-16	13		EM4	C18-20	89	
EF37A	10-8	22, 24, 65, 66	OM5B	EK2	C18-2	13	see EK32	EM34	10-48	89	64ME
EF38	10-66	21	see EF8	EK2	C18-2	12		EM71	B8B-57	88	
EF39	10-8	22, 24	OM6, W147	EK3	C18-2	13		EM80	B9A-41	89	6BR5, 65ME
EF39/W147	10-8	21	EF39, W147, OM6	EK3	C18-2	13		EM80/B9A-41	89		EM80, 6BR5, 65ME
EF40	B8A-15	22		EK90	B7G-29	12	X727, 6BE6	EM81	B9A-41	88, 89	
				EK90/B7G-29	10		EK90, 6BE6, X727	EM84	B9A-56	88, 89	
				EL2	C18-33	33, 34		EM85	B9A-40	88	
				EL3	C18-12	32, 34		EM840	B9A-56	88	
				EL5	C18-12	34		EN30	10-124	96	
				EL6	C18-12	32, 34, 40		EN31	10-112	96	
				EL22	B8B-10	33, 40		EN32	10-126	96	
								EN70	B8D-10	96	

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
EN91	B7G-51	96		FC141	MO-5	8		GET874	—	51	
EN92	B7G-46	96		FT4	IO-46	89		GET875	—	51	
EN93	B7G-72	96		FW4-500	B4-5	74	451U, U18/20, RV200/600, 4/100BU, R43	GEX34	—	46	
ESU76	Edison Screw	72						GEX35	—	46	
ESU101	B4-6	72						GEX36	—	46	
ESU103	UX4-9	72		FW4-800	B4-5	74	U18/20, RV200/600	GEX37	—	46	
ESU866	UX4-9	72						GEX39	—	46	
ESU866ES	Edison Screw	72		FY	B5-6	31	PM24M, PP4	GEX45/1	—	46	
EY51	Wires	86, 87	U43, 6X2, R12, R12A, SU61, U151					GEX54	—	46	
EY51/ 6X2	Wires	87	EY51, U43, 6X2, SU61, R12, R12A, U151	G1/236G Wires		96		GEX54/4	—	46	
EY51/ U43	Wires	87	EY51, R12A, U43, R12, SU61, U151, 6X2	G1/237	Wires	97		GEX55/1	—	46	
EY70	B8D-11	74		G1/371K	B7G	97		GEX58	—	46	
EY81	B9A-34	75		G/6C4	B7G-15	60	see 6C4	GEX64	—	46	
EY83	B9A-34	102		G/25L6	IO-36	26	see 25L6	GEX66	—	46	
EY84	B9A-30	75		G/50C5	B7G-42	26	see 50C5	GEX541	—	84	
EY86	B9A-50	86, 87, 88		G50/2G	Wires	92		GEX542	—	84	
EY86/ 6S2	B9A-50	87	EY86, 6S2	G55/1K	B7G-28	92		GJ3M	—	81	
EY91	B7G-50	72, 74		G75/3G	B8B-58	92		GJ4M	—	81	
EZ3	C18-14	75		G120/1B	B4-12	92		GJ5M	—	81	
EZ4	C18-14	75		G150/2D	IO-141	97		GJ6M	—	81	
EZ35	IO-54	73, 74, 75	6X5, U147, U70	G180/2G	B8B-59	92		GK3	B4-18	96	
EZ35/ U147	IO-54	74	EZ35, U147, 6X5, U70	G180/2M	B8B-59	92		GK10	B7G-56	96	
EZ40	B8A-14	71, 72, 74	UU9, 66KU, U150	G240/2D	IO-141	97		GK20	B7G-56	96	
EZ40/ U150	B8A-20	74	EZ40, U150, 66KU, UU9	G300/1K	B7G-75	92		GK32	Caps	96	
EZ41	B8A-14	74, 75		G400/1K	B7G-62	92		GK33	Wires	96	
EZ80	B9A-31	74		G400/2G	B7G-62	92		GK40	Caps	96	
EZ80/ 6V4	B9A-31	71, 72, 75	EZ80, 6V4	GA31A	—	83		GK41	Wires	96	
EZ81	B9A-31	71, 74, 75	U709	GA41A	—	83		GL1	IO-125	96	
EZ81/ U709	B9A-31	73	EZ81, U709	GA51A	—	83		GL2	IO-132	96	
EZ90	B7G-31	75	U78, 6X4, 6V4	GA52A	—	83		GN10	IO-123	96	
EZ90/ 6X4	B7G-31	72	6X4, EZ90, U78	GA53A	—	83		GN20	IO-123	96	
EZ90/ U78	B7G-31	73	EZ90, U78, 6X4	GA61A	—	83		GT1	—	49	
F/7001	B7G-14	27		GA62A	—	83		GT1C	B5-1	96	
FC2	B7-1	11	210PG, X22, VHT2A	GA63A	—	83		GT2	—	49	
FC2A	B7-1	11	210SPG, VO2	GD3	—	46		GT3	—	49	
FC4	B7-2	12	15A2, 41MPG, MX40, VO4, VHT4	GD4	—	46		GT3	IO-115	96	
FC13	C18-2	12		GD5	—	46		GT11	—	49	
FC13C	B7-2	12	15D1, 13PGA, VO13, VHTA	GD8	—	47		GT12	—	49	
FC31	—	81		GD9	—	47		GT13	—	49	
FC101	—	81		GD10	—	47		GT40	—	49	
FC107	—	81		GD11	—	47		GT41	—	49	
FC116	—	81		GD12	—	47		GT42	—	49	
FC117	—	81		GD14B	B5-9	95		GT43	—	49	
FC118	—	81		GDT4C	B5-9	95		GT44	—	49	
				GET1	—	49		GT45	—	49	
				GET2	—	49		GT46	—	49	
				GET3	—	51		GT47	—	49	
				GET4	—	51		GUI	B4-4	73	
				GET5	—	51		GU5	B4-6	73	
				GET15	—	51		GU12	UX4-8	73	
				GET16	—	51		GU50	B4-6	73	RG1/240
				GET20	—	51		GXU1	UX4-8	73	
				GET102	—	51		GXU2	B4F-1	73	4B32
				GET103	—	51		GXU5	Special	73	
				GET104	—	51		GXU50	B4-5	73	
				GET105	—	51		GXU52	B8B—	73	
				GET106	—	51		GZ30	IO-62	74	SZ4
				GET110	—	51		GZ32	IO-62	72, 75	SV4
				GET111	—	51		GZ33	IO-62	75	5U4, U54
				GET113	—	51		GZ34	IO-62	75	
				GET114	—	51		GZ37	IO-62	75	
				GET115	—	51					
				GET116	—	51		H2D	B5-5	62	
				GET120	—	51		H4D	B7-7	62	11A2, DDT, MHD4, ACHLDD, DDT4
				GET571	—	51					DS
				GET572	—	51		H30	B7-23	63, 64	
				GET573	—	51		H42	B7-23	63, 64	
				GET691	—	51		H63	IO-18	63, 64	
				GET692	—	51		H141D	MO-6	61	
				GET871	—	51		HABC80	B9A-2	60	19T8
				GET872	—	51		HAD	B7-7	62	11D3, 13DHA
				GET873	—	51					

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
HBC90	B7G-19	65		HR9	IO-131	87		KS30B	—	93	
HBC91	B7G-19	66		HR11	IO-120	87		KS31A	—	93	
HD14	IO-91	63, 64	1H5, DAC32	HR12	UX4-18	87		KS32A	—	93	
HD22	B5-5	62, 64	210DDT, HD24, TDD2A, DDT2, H2D	HR210	B4-1	66	HR2	KS32B	—	93	
HD23	B5-5	62, 64	210DDT, HD24, TDD2A, DDT2, H2D	HT43	—	81		KS33A	—	93	
HD24	B5-5	63, 64	210DDT, TDD2A, DDT2, H2D	HT44	—	81		KS34A	—	93	
HF93	B7G-16	23	12BA6	HT45	—	81		KS34B	—	93	
HK90	B7G-29	13	12BE6	HT46	—	81		KS35A	—	93	
HL2	B4-1	61, 62, 63, 64, 66	PM2HL, 210HL	HT47	—	81		KS36A	—	93	
HL4	B5-1	66		HT48	—	81		KS36B	—	93	
HL4g	B7-6	66	MH4	HT49	—	81		KS37A	—	93	
HL13	B7-23	64, 66		HT50	—	81		KS38A	—	93	
HL13	C18-3	65		HT51	—	81		KS38B	—	93	
HL13C	B7-23	65		HT52	—	81		KS39A	—	93	
HL13S	C18-6	66		HT53	—	81		KS40A	—	93	
HL21DD	B5-5	61	H2D	HT54	—	81		KS40B	—	93	
HL22	MO-2	61		HT57	—	81		KS41A	—	93	
HL22D	MO-7	61		HT59	—	81		KS42A	—	93	
HL23	MO-2	61		HT60	—	81		KS42B	—	93	
HL23DD	MO-7	61		HT61	—	81		KS43A	—	93	
HL41	MO-16	61		HT62	—	81		KS44A	—	93	
HL41DD	MO-10	61		HT63	—	81		KS44B	—	93	
HL42DD	MO-10	61		HTS5A	—	83		KT2	B5-6	30, 31	Pen B1, 220/OT, Pen 220, PM22A, PP2, 210HPP, 220HPT, PT2
HL92	B7G-42	34	50C5	HTS10A	—	83		KT8	B5-2	69	
HL133	MO-19	61		HVR1	B4-6	87	SU2150, U16	KT21	B5-6	29, 31	KT24, Pen 231, PM22D
HL133DD	MO-10	61		HVR2	B4-17	87		KT24	B5-6	29, 31	Pen 231, PM22A, PT2
HL1320	B7-23	61		HVR2A	B4-6	87	SU2150A, VLS61	KT30	B7-24	30, 31	7D5, PTA, N30, PP13A
HLDD1320	B7-7	61		HY90	B7G-33	71, 75	35W4	KT31	B7-15	30, 31	PT6A, N31, PTS
HN309	B9A-27	30, 32		IW4-350	B4-14	74		KT32	IO-36	30, 32, 39, 40	25L6
HP2	B7-11	62		IW4-500	B4-14	74	{ R3, 431U, MU14, UU5, R42	KT33C	IO-73	30, 32, 39, 40	
HP13	B7-6	23		K3/15	—	77		KT35	IO-73	30, 31, 39	
HP13S	C18-15	23		K3/25	—	77		KT36	IO-38	43	
HP210	B4-2	23		K3/40	—	77		KT41	B7-24	30, 31	7A3, 420T, AC/2Pen, APP4B, PT4, Pen A4, Pen 4VB, 42MPPen
HP210	B7-4	23	SPT2	K3/45	—	77		KT42	B7-24	30, 31	7A2, MPPen, MKT4, ACPen, P4VA, APP4A
HP211	B4-2	23		K3/50	—	77		KT44/45	B7-37	32, 43	
HP211	B7-4	23		K3/100	—	77		KT45	B7-37	30, 31, 43	
HP215	B4-2	20	Z21, PM12, SP210, HP210	K3/200	—	79		KT155	—	39, 40	
HP215	B7-4	20	SPT2, 210SPT, HP210	K8/80	—	87		KT61	IO-36	30, 32, 39, 40	
HP2018	B5-2	24		K8/100	—	87	OA3, VR75	KT63	IO-36	30, 32, 39, 40	6F6
HP2118	B5-2	24		K8/120	—	87	OC3, VR105	KT66	IO-36	30, 32, 39, 40	EL37, PP60
HP2118	B7-5	24		K8/140	—	87	OD3, VR150	KT71	IO-36	30, 32, 39, 40	50L6
HP4101	B5-2	23		K8/180	—	87		KT76	IO-36	30, 32, 39, 40	
HP4101	B7-5	23		K8/200	—	79, 87		KT77	—	39	
HP4106	B5-2	23		KB4	—	77		KT81	B8B-10	30, 31, 39	
HP4106	B7-5	23		KB5	—	77		KT88	IO-36	30, 39	
HP4115	B5-2	23		KBC32	IO-88	65					
HP4115	B7-5	23	VPT4B	KCF30	IO-98	11					
HR1	B7G-1	87	R10	KD21	IO-74	91					
HR2	B4-1	66	HR210	KD24	IO-74	91					
HR2	B7G-22	87	2T/270K	KD25	IO-74	91					
HR2S	C18-18	66		KD60	Caps	91					
HR3	B7G-22	87		KD61	Wires	91					
HR6	IO-22	72		KD63	Wires	91					
HR8	IO-103	87	SU42	KF1	—	48					
				KF2	—	48					
				KF4	—	48					
				KF6	—	48					
				KF35	IO-85	21					
				KG1	—	48					
				KG2	—	48					
				KG6	—	48					
				KH1	—	48					
				KH2	—	48					
				KH4	—	48					
				KH6	—	48					
				KK32	IO-76	11	see FC2A				
				KL35	IO-78	32					
				KLL32	IO-97	40					
				KS30A	—	93					

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
MW41-1	B12A-1	101		OA2	B7G-28	90, 91, 92		OC170	—	52	
MW43-43	B12A-10	101		OA2WA	B7G-28	91		OC171	—	52	
MW43-64	B12A-10	100	171K, 17AXP4, 172K, TR17/21, C17/1	OA3	IO-74	91, 92	VR75/30, KD21	OC200	—	53	
MW43-69	B12A-10	98, 101	TR17/22, C17/1A	OA5	—	84		OC201	—	53	
MW43-80	B12A-10	101	C17/4A	OA7	—	47		OC202	—	53	
MW53-20	B12A-10	101		OA10	—	47		OC203	—	53	
MW53-80	B12A-10	98, 101	C21/1A, TR21/22	OA60	—	47		OC204	—	53	
MX40	B7-2	10, 11	15A2, 41MPG, VHT4, MH4105, FC4, VO4	OA61	—	47		OC205	—	53	
MZ05-20	B4-1	69		OA70	—	47		OC206	—	53	
N14	IO-78	30, 31, 39	1C5, DL35	OA71	—	47		OD3	IO-74	91, 92	
N15	IO-87	29, 31, 39		OA73	—	47		OM1	IO-55	71	CY31, U281
N16	IO-87	30, 31	3Q5, DL33	OA79	—	47		OM4	IO-29	60	EBC33
N17	B7G-6	29	3S4, 1P10, DL92	OA81	—	47		OM5B	IO-8	17	EF37A
N17	B7G-6	31	see DL92	OA85	—	47		OM5C	IO-8	17	
N18/3Q4	B7G-6	30, 32	N18, 3Q4	OA86	—	47		OM6	IO-8	17	W147, EF39
N19	B7G-58	30, 32	see DL94	OA90	—	47		OM10	IO-3	8	
N25	B7G-9	30	see DL96	OA91	—	47		OY4	IO-61	76	
N37	B7G-25	32		OA95	—	47		OZA	IO-57	71, 72, 76	
N43	B7-15	30, 31		OA200	—	84		P2	B4-1	30, 31	PX230, LP2
N77	B7G-25	30	see EL91	OA202	—	84		P12/250	B4-1	34	PX4, PP3/250, 4XP, LP4, ACO44
N78	B7G-25	30, 39, 40	6B15	OA210	—	84		P15/250	B4-1	34	PX25, LP25
N108	B7G-25	30, 32		OA211	—	84		P27/500	B4-1	34	
N118	B8A-7	30		OA2200	—	94		P41	MO-16	61	
N119	B9A-16	30	see UL84	OAZ201	—	94		P46H1X to P46H9X	—	77	
N142	B8A-23	40	see UL41	OAZ202	—	94		P61	MO-16	61	
N144	B7G-63	32	EL91, N77, 6AM5	OAZ203	—	94		P215	B4-1	28, 31, 34	L2
N145	B8A-7	32	10P13	OAZ204	—	94		P220	B4-1	28, 31	L2
N147	IO-36	32	see EL33	OAZ205	—	94		P220A	B4-1	28	LP2
N148/ 7C5	B8B-10	32	N148, 7C5	OAZ206	—	94		P2018	B5-1	34	
N150	B8A-23	32	see EL41	OAZ207	—	94		PA1	B5-1	26	ACPI, O54V 41MXP, LL4
N151	B8A-23	32	see EL42	OAZ208	—	94		PA20	B4-1	28	2P, ACO42
N152	B9A-17	43	see PL81	OB2	B7G-28	90, 91, 92		PA40	B4-1	38	DA30, DO30, P30/500
N155	B9A-26	32		OB2WA	B7G-28	91		PABC80	B9A-2	66	JAN7, 30L1, B319
N308	IO-129	30, 43		OB3	IO-74	92		PC95	B7G-79	65	
N309	B9A-14	30, 32	see PL83	OC2	B7G-28	90, 91, 92		PCC84	B9A-28	66	JAN7, 30L1, B319
N329	B9A-16	30, 32, 39, 40	see PL82	OC3	IO-74	91, 92		PCC84/ 7AN7	B9A-28	60, 61, 62	PCC84, 7AN7, B319, 30L1
N339	B9A-17	43	PL81, 21A6, N152	OC16	—	51		PCC84/ B319	B9A-28	63, 64	PCC84, B319, 30L1, 7AN7
N359	B9A-17	43	see PL81	OC19	—	52		PCC85	B9A-39	61, 66	9A08
N369	B9A-16	30		OC22	—	52		PCC85/ 9A08	B9A-39	62	PCC85, 9A08
N379	B9A-16	30	see PL84	OC23	—	52		PCC88	B9A-39	66, 67	
N388/6 to N388/200	—	79		OC24	—	52		PCC89	B9A-28	61, 66	
N709	B9A-16	30, 32, 39, 40	see EL84	OC25	—	52		PCF80	B9A-25	12, 15, 60	LZ319, 30C1, 8A8, 9A8
N727	B7G-27	30, 39	see EL90	OC26	—	52		PCF80/ 9A8	B9A-25	8	LZ319, 30C1, PCF80, 8A8, 9A8
N727/ 6AQ5	B7G-27	32, 40	N727, 6AQ5, EL90	OC28	—	52		PCF80/ LZ319	B9A-25	11	LZ319, PCF80, 8A8, 30C1, 9A8
O11L992	—	81		OC29	—	52		PCF82	B9A-25	8, 10, 12	9U8
O11L999	—	79		OC35	—	52		PCF82/ 9U8	B9A-25	7	PCF82, 9U8
O15/400	B4-1	34		OC36	—	52		PCF84	B9A-65	13	
				OC41	—	52		PCF86	B9A-64	7, 12	7HG8
				OC42	—	52		PCL82	B9A-37	27, 34, 37, 38, 41, 60, 61, 64, 66	16A8
				OC44	—	52					
				OC45	—	52					
				OC50	—	49					
				OC51	—	49					
				OC57	—	52					
				OC58	—	52					
				OC59	—	52					
				OC60	—	52					
				OC65	—	52					
				OC66	—	52					
				OC70	—	52					
				OC71	—	52					
				OC72	—	52					
				OC73	—	52					
				OC75	—	52					
				OC77	—	52					
				OC83	—	52					
				OC84	—	52					
				OC122	—	52					
				OC123	—	52					
				OC139	—	52					
				OC140	—	52					

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
PCL82/16A8	B9A-37	29	PCL82, 16A8	PL82/16A5	B9A-16	27, 39	N329, N154, PL82, 16A5	PX4	B4-1	30, 32, 39, 40	4XP, LP4, PP3/250, ACO44, PX41, P12/250, P460
PCL83	B9A-27	27, 29, 35, 39, 41, 61, 66	LN309, HN309	PL82/ N329	B9A-16	30, 32, 39, 40	N329, PL82, N154, 16A5	PX5	B4-1	31	PX25, LP25
PCL83/ LN309	B9A-27	30, 32, 39, 40, 63, 64	PCL83, LN309, HN309	PL83/ N309	B9A-14	27, 34, 30, 32	N309, N153	PX25	B4-1	30, 32, 39, 40	PP5/400, DO24, P27/500, PX5, LP25
PCL84	B9A-53	16, 27, 29, 30, 34, 60, 61, 66		PL84	B9A-16	27, 29, 34, 39	N379				
PCL85	B9A-66	27, 34, 60, 61, 66		PL84/ N379	B9A-16	30	N379, PL84	PX230	B4-1	31	P2, LP2
PD220	B7-10	38	HP2	PL820	B9A-17	43		PY31	IO-55	74, 75, 102	
PD220A	B7-10	38		PM1HF	B4-1	65	210HF	PY32	IO-111	71, 73, 74, 75, 76	
Pen 4DD	B7-22	33	DDPP4M	PM1LF	B4-1	65	210LF				
Pen 4VA	B5-7	32	7A2, MKT4/5, APP4A	PM2	B4-1	32		PY80	B9A-18	102	PY80, 19X3, U309, U152
				PM2A	B4-1	32	220PA, L2	PY80/ 19X3	B9A-18	102	PY81, U309, U152, 19X3
Pen 4VA	B7-24	32	7A2, MP Pen, MKT4/7, AC Pen, APP4A	PM2B	B7-10	40	220B, B21, PD220	PY80/ U309	B9A-18	73, 102	17Z3, U153, U329, U251
Pen 24	MO-3	28	Pen 25	PM2HL	B4-1	65	HL2	PY81	B9A-18	73, 102	17Z3, U153, U329, U251
Pen 25	MO-3	28	Pen 24	PM12M	B4-2	21	W21/4, VS2	PY81/ 17Z3	B9A-34	102	PY81, U251, 17Z3, U153, U329
Pen 26	C18-4	33		PM22	B5-6	32		PY82	B9A-18	75	19Y3, U319, U154
Pen 36C	B7-24	33	7D6, Pen 3520, PP35	PM22A/5	B5-6	32	KT2, PT2, 220/OT	PY82/ 19Y3	B9A-18	71, 73	19Y3, U319, PY82, U154
Pen40DD	B7-22	33	Pen DD4020, DDPP39M	PM22D	B5-6	32		PY82/ U319	B9A-18	73, 74	PY82, U319, 19Y3, U154
Pen 44	MO-20	28, 38		PM24A	B5-6	32		PY83	B9A-34	102	
Pen 45	MO-20	28, 38		PM24M	B5-6	32	Pen A1, PT41, PM4, PP4	PY88	B9A-34	102	R14
Pen45AN	MO-20	28	see Pen 45	PM202	B4-1	32	LP2	PZ30	IO-52	72, 74, 76, 102	
Pen45DD	MO-15	28		PP2	B5-6	34	PT2				
Pen 46	MO-14	42		PP2	B4-7	34					
Pen 141	MO-3	28		PP3/250	B4-1	28	4XP, LP4, ACO44, PX4				
Pen 220	B5-6	28	KT2, PT2	PP4	B5-6	34					
Pen 220A	B5-6	28		PP5/400	B4-1	28	PX25, DP24, P27/500, LP25				
Pen 231	B5-6	28		PP24	B7-15	34					
Pen 383	MO-20	28		PP24S	C18-4	34					
Pen 384	MO-20	28		PP34	B7-15	34					
Pen 428	B7-24	32, 40		PP34S	C18-4	34					
Pen453DD	MO-15	28		PP35	B7-24	34					
Pen 1340	B7-24	28	7D8, PTA	PP36	B7-25	34					
Pen 3520	B7-24	28	7D6	PP37	B7-15	34					
Pen 3820	B7-24	28		PP60	IO-36	35, 41	EL37, KT66				
Pen A1	B5-6	26	PT41, PM24M, PT4, PP4	PP215	B5-6	34					
Pen A4	B7-24	33	7A2, APP4B, 420T, PT4, KT41, AC2 Pen	PP222	B4-7	34					
Pen B4	B7-24	33	AC4 Pen, APP4E	PP222	B5-7	34	KT2				
Pen DD-1360	B7-9	28		PP225	B5-6	34					
Pen DD-4020	B7-9	28		PP2018	B5-7	34					
Pen DD-4021	B7-9	28		PP3521	B7-16	28					
PL33	IO-36	33, 35, 41		PR1		77					
PL36	IO-129	42, 43	25E5	PT2	B5-6	29	KT2				
PL38	IO-40	42, 43		PT4	B7-24	29	Pen A1, PT41, AC/2 Pen, PM24M, PP4, 7A3				
PL81	B9A-17	43	21A6, N152, N359	PT4D	B7-9	29	420TDD, DN41, AC/2PenDD, DDPP4B, AC/5Pen				
PL81/ 21A6	B9A-17	39, 42	PL81, 21A6, N152, N359	PT10	B7-24	27					
PL81/ N152	B9A-17	43	PL81, N152, 21A6, N359	PT15	B5-14	69					
PL81/ N359	B9A-17	43	PL81, 21A6, N152, N359	PT25	B5-6	30, 31	Pen 24D, PP4				
PL82	B9A-16	33, 41	N329, N154, 16A5	PT41	B5-6	27	Pen A1, PT4, PM24M				
				PT41B	B5-6	27	Pen 24D, PP4				
				PTA	B7-24	29					
				PTSD	B7-9	29					
				PTZ	B7-15	29					
				PV1-35	B7-39	69					
				PV25	B7-29	75					
				PV29	B7-29	75					
				PV30	B7-29	75					
				PVB6	B5-3	75					
				PV06-25	B7-39	69					

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
QS75/20	B7G-70	91		R20	B9A-50	86		S2	B4-2	18	
QS75/40	IO-74	91		R42	B4-14	72		S2P20	B9A-63	69	
QS75/60	B8B-64	91		R43	B4-5	72		S6F12	B7G-21	18	
QS83/3	B7G-52	91		R52	IO-62	72	5Z4, GZ30, 52KU	S6F33	B7G-21	18	
QS92/10	B4-12	91						S11E12	IO-138	28	
QS95/10	B7G-40	91		R417A	B9A	63		S12	Sm4-2	20	
QS105	B8B-55	91		R5559	B9A	63		S19G6	B7G-78	86	
QS108/45	B8B-55	91		RA	B5-8	72		S19G6F	B7G-78	86	
QS150/15	B7G-40	91		RG1-	B4-6	75		S23	E4-2	20	
QS150/40	IO-74	91	VR150/30, SV-VR150/ 30, OD3, KD25	240A				S24	B4-2	20	
				RG3-250	Edison	74		S130	B4-12	90, 91	
					Screw	74		S130P	B4-15	90, 91	
QS150/45	B8B-55	91		RG3-	B4D-1	74		S215A	B4-2	17	
QS1200	B7G-55	91		250A				S215B	B4-2	17	Z21
QS1201	B7G-28	91		RG3-	Edison	75		S215VM	B4-2	17	SG215, W214, VS2
QS1202	B7G-28	91		1250	Screw	75					
QS1203	B7G-28	91		RG250/	B4-6	75		S2018	B5-2	23	
QS1205	IO-74	91	see OA3	1000				S2018	B7-5	23	
QS1206	IO-74	91	see OC3	RG250/	UX4-6	75		SA495		57	
QS1207	B7G-28	91	see OA2	3000				SA496		57	
QS1208	B7G-28	91	see OB2	RMO		77, 79		SA445		57	
QS1209	B7G-28	91		RM1		77, 79	SM1	SAC40		57	
				RM1A		77	SM1	SAC42		57	
QS1210	B7G-28	91	see OA2WA	RM2		77, 79	SM2/3	SAC44		57	
QS1211	B7G-28	91	see OB2WA	RM3		77, 79	SM2/3	SB2		77	
QS1212	B7G-28	91		RM4		77, 79		SB3		77	
QS1213	B7G-28	91		RM4B		77		SB128		57	
QS1215	B7G-28	91		RM5		77	SM5	SB240		57	
QV03-12	B9A-11	69	5763	RR0		78		SB344		57	
QV04-7	B9G-6	69		RR1		78		SB345		57	
QV05-25	UX5-6	69	807	RR2		78		SD	B5-8	44	
QV06-20	IO-134	70		RR3		78		SD6	B7G-39	44	
				RR3-250	B4D-1	75		SD61	B3G-1	44	EA50, 6D1
				RS20A		84	RS20AF	SE14/70	B12A-11	99	
				RS20AF		84		SE17/70	B12A-11	99	
				RS21A		84	RS21AF	SE211	B4-2	23	
				RS21AF		84		SE14		78	
				RS22A		84	RS22AF	SE15		78	
R1	B4-14	70	431U, U10, UU5,DW2, PV495, R41, 442BU, 1W3, R42	RS22AF		84		SE17		78	
				RS23A		84	RS23AF	SE19		78	
				RS23AF		84		SE110		78	
R2	B4-14	70	R3, 431U, R4, MU14, UU5, 1W4/ 500, APV4, 441U, 460BU, 1W4/350, R43	RS24A		84	RS24AF	SE112		78	
				RS24AF		84		SE160		78	
				RS25A		84	RS25AF	SE161		78	
				RS25AF		84		SG215	B4-2	17	W214, VS2, S215VM
				RS26AF		84		SJ051A		82	
				RS27AF		84		SJ051B		82	
				RS28AF		84		SJ052A		82	
				RS30A		84	RS30A	SJ052B		82	
				RS30BF		84		SJ101A		82	
				RS31A		84	RS31BF	SJ101B		82	
R3	B4-14	70	431U, R4A, MU14, UU5, 1W4/500, APV4, R2	RS31BF		84		SJ102A		82	
				RS32A		84	RS32BF	SJ102B		82	
				RS32BF		84		SJ201A		82	
				RS33A		84	RS33BF	SJ201B		82	
				RS33BF		85		SJ202A		82	
R4	B4-5	72	431U, U14, DW4/350, RV120/350, R4A	RS34A		84	RS34BF	SJ202B		82	
				RS34BF		85		SJ301A		82	
				RS35A		84	RS35BF	SJ301B		82	
				RS35BF		85		SJ302A		82	
R4A	B4-5	72	451U, U14, DW4/500, RV120/500, R3, UU5	RS36BF		85		SJ302B		82	
				RS37BF		85		SJ401A		82	
				RS38BF		85		SJ401B		82	
				RS50AF		85		SJ402A		82	
				RS51AF		85		SJ402B		82	
R10	B7G-22	86	HR1, HR2	RS52AF		85		SJ501A		82	
R11	B4-6	86		RS53AF		85		SJ502B		82	
R12	Wires	86	SU61, EY51, U43, 6W2	RS54AF		85		SJ601A		82	
				RS55AF		85		SJ601B		82	
R13A	IO-54	72		RV120/	B4-5	75	U14, R4	SM1		79	
R14	IO-52	71	PZ30	350				SM2/3		79	
R16/IT2	Wires	86	RJ16, IT2	RV120/	B4-5	75	U14, R4	SM5		79	
R17	B9A-30	70		500				SP2	B7-4	21	Z21, 210SPT
R18	B9A-30	71	EY84	RV200/	B4-5	75	U18/20, R43	SP2B	B7-13	23	
R19/ 1X2B	B9A-32	86	R19, 1X2B	600			1D5				
				RZ	B5-8	72					

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
SP2BS	C18-25	23		SX781	—	47		TH232	B7-3	8	
SP2D	B7-13	23		SX782	—	47		TH233	MO-12	8	
SP4	B7-5	21	SPT4A, 8A1, MS Pen, MSP4, HP4101C	SZT1	—	94		TH2320	B7-3	8	
				SZT2	—	94		TK20	—	49	
SP4	B7-6	23	SP4B					TK21	—	49	
SP4B	B7-6	21, 23	MS Pen					TK23	—	58	
SP4S	C18-15	23						TK24	—	49	
SP6	B7G-21	16	see EF91					TK25	—	49	
SP13	B7-6	23						TK28	—	58	
SP13	C18-15	22		T4D	B3G-1	45	D1	TK30	—	58	
SP13B	B7-6	23		T9/2	IO-112	99		TK31	—	58	
SP13C	B7-6	22	8D2, 13SPA, SP13B, SPTA see SP13	T9/3	IO-112	100		TK40	—	58	
				T9/5	IO-112	100		TK41	—	58	
SP13S	C18-1	23		T12/2	IO-112	99		TK42	—	58	
SP22	MO-1	17		T12/3	IO-112	100		TJ1	—	57	
SP41	MO-11	17		T12/44	IO-112	100		TJ2	—	57	
SP42	MO-11	17		T12/46	IO-112	100		TJ3	—	57	
SP61	MO-11	17		T12/54	IO-112	100		TP1	—	49	
SP141	MO-4	17		T12/56	IO-112	100		TP2	—	49	
SP181	MO-11	17		T12/71U	IO-112	100		TP22	B9-1	8	
SP210	B7-4	17	SP215, Z21, SPT2	T12/72U	IO-112	100		TP23	B7-34	8	
SP215	B7-4	17	SP210, Z21, SPT2	T12/81U	IO-112	100		TP25	MO-23	8	
				T12/82U	IO-112	100		TP26	MO-22	8	
SP220	B4-1	34	LP2	T12/91	IO-112	100		TP1340	B9-2	8	
SP1320	B7-5	17	8D2, SP13C, SP13B, SPTA	T12/92	IO-112	100		TP2620	B9-2	8	
				T12/100	B12A-1	100		TR14/1	IO-112	100	
SP2220	B7-5	17		T12/404	IO-112	100		TR14/2	IO-112	100	
SPT2	B7-4	18		T12/449	IO-112	100		TR14/4	IO-112	100	
SPT14A	B7-5	18	8A1	T12/504	IO-112	100		TR14/8	B12A-1	100	
SPTA	B7-6	18	8D2	T12/549	IO-112	100		TR14/13	B12A-9	100	
SR2201A	—	83		T31	B5-9	95		TR14/15	B12A-9	100	
SR2301A	—	83		T41	MO-16	95		TR14/21	B12A-1	100	C36-24,141K, MW36-24
SR4201A	—	83		T900	B12A-4	99		TR14/22	B12A-1	100	
SR4301A	—	83		T901A	B12A-4	99		TR17/1	IO-112	100	
SR4401A	—	83		T908	B12A-1	99		TR17/2	IO-112	100	
SR4501A	—	83		T909A	B12A-4	99		TR17/8	B12A-9	100	
SS210	B4-2	23		T914	B12A-9	99		TR17/10	B12A-9	100	
SS2018	B5-2	24		T915	B12A-4	99		TR17/21	B12A-1	100	C17/1, 171K, 17AXP4, MW43-64
ST11	B4-12	91	7475	TA10	B7B-1	99		TR17/22	B12A-1	100	C17/1A, MW43-69
STV280/40	B5-15	91		TA15	B7B-1	99		TR21/21	B12A-1	100	
STV280/80	B5-15	91		TD03-5	Coaxial	70		TR21/22	B12A-1	100	C21/1A, MW53/80
SU25	IO-102	86		TD03-10	Coaxial	70		TS1	—	58	
SU42	IO-103	86	HR7, HR8	TD03-10F	Coaxial	70		TS2	—	58	
SU45	B7G-22	86	19G6	TD04-20	Coaxial	70		TS3	—	58	
SU2150	B4-6	86	U21	TD05-12	—	69		TS4	—	49	
SU2150A	B4-17	86	HVR2A	TDD2A	B5-5	65	HD24	TS7	—	49	
SVC1	—	47		TDD4	B7-7	65		TS8	—	49	
SVC2	—	47		TDD13C	B7-7	65		TS13	—	58	
SVC3	—	47		TH2	B7-34	12	HAD, DDT13, 11D3	TS14	—	58	
SX47	—	93		TH4A	B7-3,	12, 13	220TH, X24 20A1, 4THA, AC/TH1, TH4B	TS15	—	58	
SX51	—	93		TH13C	B7-3	12	302THA, 202STH, TH22C, TH2321, TX21	TS16	—	58	
SX56	—	93		TH21C	B7-3	12	TH29, TH30C	ISP4	B7-6	21	ACSP3 41MP, ML4, ACP, LL4, L4
SX62	—	93					TH22C	TT4	B5-1	65	
SX68	—	94					TH2321				
SX75	—	94					TX21	TT4A	B5-1	65	
SX82	—	94					TH29, TH30C	TT11	IO-113	69	
SX631	—	84					302THA, 202STH, TH2321, TX21, TH29, TH30C	TT12	B9G-8	69	
SX632	—	84						TT15	B9G-5	69	44A/160M
SX633	—	84						TT20	B7A-1	69	
SX634	—	84						TT21	IO-129	39, 69	
SX641	—	84						TT22	IO-129	39, 69	
SX642	—	84						TV4	C18-9	89	
SX643	—	84						TX4	B7-3	13	X41
SX644	—	84						TX21	B7-3	13	
SX645	—	84						TY1-50	B4-16	69	4304CB
SX751	—	84						TY86F	—	87	
SX752	—	84						TZ05-20	B4-1	69	
SX753	—	84									
SX754	—	84									
SX780	—	47		TH41	MO-12	8					

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
U10	B4-5	73, 74	431U, R1, UU5, DW2, PV495, 506BU, 1821, R41	U153	B9A-34	102	U329, U251, PY81, 17Z3	UCH81	B9A-24	8, 9, 11, 13, 14	X119
U12	B4-5	73	R3, 431U, U14, R4, UU5, DW4/350, R2, RV120/ 500	U154	B9A-18	74	19Y3, PY83, U319, PY82	UCH81/ X119	B9A-24	10	
U14	B4-5	73, 74	R3, 431U, UU5, DW4/500, RV120/500, DW3, DW4, RV120/350, 442BU, 460BU, 1561, R42	U191	IO-128	103		UCL82	B9A-37	27, 29, 35, 38, 61, 63, 66	
U16	B4-6	87	SU2150, HVR1	U192	B9A-18	72		UCL82/ LN119	B9A-37	30	UCL82, LN119
U17	B4-6	73, 87		U193	B9A-34	102		UCL83	B9A-27	29, 30, 33, 35, 61, 64, 65	
U18/20	B4-5	73, 74	451U, FW4/500, RV200/600, R43, FW4/800, 4/100BU	U201	IO-55	72	CY31, OM1	UD41	B7-33	71	
U19	B4-6	73		U251	B9A-34	102	U153, U329, PY81, 17Z3	UF41	B8A-7	15, 17, W142, 121VP 18, 22	
U19/20	B4-6	73		U281	IO-55	72, 102	CY31, OM1	UF41/ W142	B8A-24	21	UF41, W142
U21	B4-6	86	SU2150	U282	IO-121	102		UF42	B8A-8	22	Z142
U22	MO-17	86		U291	IO-111	72		UF42/ Z142	B8A-8	21	UF42 Z142
U24	IO-102	86		U301	IO-128	102		UF80	B9A-10	23	
U25	Wires	86		U309	B9A-18	73, 102	see PY80, 19X3, U152	UF85	B9A-10	19, 22, 24	
U26	B9A-50	86		U319	B9A-18	73, 74	see PY82	UF86	B9A-23	23	
U27	B4-6	87		U329	B9A-34	102	U251, PY81, 17Z3, U153	UF89	B9A-36	17, 19, 21, 23, 24	
U30	B7-12	73, 74		U339	IO-128	102		UL41	B8A-23	26, 29, 30, N142, 451PT 33, 37, 38, 40	
U31	IO-55	73, 74		U381	B9A-18	72		UL41/ 451PT	B8A-23	27	UL41, 451PT N142
U33	B4-6	87		U403	MO-18	72, 102		UL41/ N142	B8A-23	32, 40	UL41, N142, 451PT
U35	IO-120	87		U404	B8A-1	72	U142, UY41	UL44	B8A-16	43	
U37	Wires	87	R16	U709	B9A-31	73, 74	see EZ81	UL46	B8A-7	33, 35	
U41	IO-58	87		U718	B8A-14	73		UL84	B9A-16	27, 29, 34, 35, 39, 41	
U43	Wires	87	see EY51	U801	IO-117	72, 102	IDS, 40SUA, RZ, URIC	UL84/ N119	B9A-16	30	UL84, N119
U45	Wires	87		U4020	B5-8	72		UM4	IO-136	89	
U47	Wires	87		UABC80	B9A-2	64, 66, 67		UM34	IO-48	89	
U49	B9A-50	87		UABC80/ DH109	B9A-2	63	UABC80, DH109	UM80	B9A-41	89	
U50	IO-60	73, 74	5Y3	UAF41	B8A-11	22		URIC	B5-8	74	IDS, 40SUA, RZ, U4020, V20
U52	IO-60	73, 74	5U4	UAF42	B8A-12	18, 22	WD142	UR3C	B7-29	74	
U60	IO-139	87		UAF42/ WD142	B8A-12	21	UAF42, WD142	UU4	B4-14	71	R3, 431U, MUI4, 1W4/350, UU5, APV4, R2
U70	IO-54	74	6X5, EZ35, U147	UB41	B8A-10	45	10LD3, 14L7, 141DDT, DH142, DH118	UU5	B4-14	72	R3, 431U, R4H, MUI4, 1W4/500 APV4
U76	IO-55	73, 74	35Z4	UBC41	B8A-9	59, 62, 65	10LD3, 14L7, 141DDT, DH118	UU6	MO-8	72	
U78	B7G-31	73	see EZ90	UBC41/ DH118	B8A-9	63	10LD3, 14L7, 141DDT, DH118	UU7	MO-8	72	
U78/6X4	B7G-31	74	EZ90, 6X4, U78	UBC81	B9A-54	66, 67	DH119	UU8	MO-8	72	
U81	B8B-24	73		UBC81/ DH119	B9A-54	63	UBC81, DH119	UU9	B8A-14	72	EZ40, 66KU, U150
U82	B8B-1	74	7Z4, U149, 7Y4	UBF80	B9A-12	19, 22, 24	171DDP	UU10	B4-14	71	
U84	B8B-24	73		UBF80/ 171DDP	B9A-12	17	UBF80, 171DDP	UU12	B9A-31	72	
U101	B8B-25	73, 74		UBF89	B9A-12	17, 19, 23	WD119	UU60/ 250	B4-5	73	R2, R42
U107	B7G-13	73, 74		UBF89/ WD119	B9A-12	20	UBF89, WD119	UU120/ 350A	B4-5	73	R2, R42
U118	B8A-1	73		UBL21	B8B-6	33		UU120/ 500	B4-5	73	MUI4, R43, R3
U119	B9A-18	73	see UY85	UC92	B7G-65	65		UYIN	IO-122	74	
U142	B8A-22	74		UCC84	B9A-28	61, 65, 67		UY21	B8B-4	74	
U143	IO-60	74	see AZ31	UCC85	B9A-39	61, 62, 64, 66, 67		UY31	IO-55	74	
U145	B8A-5	74	see U404	UCC85/ B109	B9A-39	63	UCC85, B109	UY41	B8A-1	71, 72, 74	U142, 31A3, U404, 311SU
U147	IO-54	74	see EZ35	UCF80	B9A-25	12, 14					
U149/ 7Y4	B8B-1	74	U149, 7Y4, U82	UCH21	B8B-42	12					
U150	B8A-20	74	see EZ40	UCH42	B8A-3	7, 12	141TH, X142				
U151	Wires	87	R12, SU61, 6X2, EY51, U43	UCH42/ 141TH	B8A-3	8	141TH				
U152	B9A-18	102	PY80, U309	UCH42/ X142	B8A-3	11	141TH, UCH42, X142				

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
UY41/ 311SU	B8A-15	71	311SU, U142, U404, 31A3, UY41	VMP4G	B7-5	20	MVSPen, VP4A, VPT4B	VR11-B	—	93	
UY41/ U142	B8A-22	74	UY41, U142, 31A3, U404, 311SU	VMS4	B5-2	19, 21	VP4, AS4125	VR12-A	—	93	
UY85	B9A-18	71, 73, 74, U119		VMS4B	B5-2	19, 20	MVSPen, AC/SGVM, VP4, AS4125	VR12-B	—	93	
UY85/ U119	B9A-18	73	UY85, U119	VO2	B7-1	13	X22	VR35-A	—	93	
				VO2S	C18-31	13		VR35-B	—	93	
				VO4	B7-2	13	MX40, VHT4	VR75/30	IO-74	90, 92	SV-VR75/30, OA3, KD21
				VO13	B7-2	13	VHTA	VR105/30	IO-74	90, 92	SV-VR105/30, OC3, KD24
				VO13S	B7-2	13		VR150/30	IO-74	90, 92	SV-VR150/30, OD3, QS150/40, KD25
				VP2	B7-4	21	W21/7, VPT2				
				VP2B	B7-13	23					
				VP2B	B7-28	21		VR425-A	—	93	
				VP2BS	C18-25	23		VR425-B	—	93	
				VP2D	B7-13	23		VR475A	—	93	
				VP4	B5-2	21	9A1, MVSPen, VPT4, VMP4G, AC/VP1, HP4106	VR475-B	—	93	
V3/1/Y	—	77		VP4	B7-6	21, 23	VMP4G, VPT4B	VR525A-A	—	93	
V3/2/Y	—	77		VP4A	B5-2	21	9A1, MVSPen	VR525A-B	—	93	
V6/2R	—	53		VP4A	B7-5	21	VMP4G, VPT4B	VR525B-A	—	93	
V6/2RJ	—	53		VP4B	B7-6	22, 24	MVSPen B, AC/VP2, W42	VR525B-B	—	93	
V6/4R	—	53		VP4S	C18-15	23		VR575A-A	—	93	
V6/4RJ	—	53		VP13	B7-5	20		VR575A-B	—	93	
V6/8R	—	53		VP13	B7-6	23		VR575B-A	—	93	
V6/8RJ	—	53		VP13A	C18-15	22		VR575B-B	—	93	
V10/1S	—	53		VP13B	B7-6	23		VR625-A	—	93	
V10/1SJ	—	53		VP13C	B7-6	22	9D2, 13VPA, VPI322, VPI3B	VR625-B	—	93	
V10/2S	—	53		VP13K	B7-6	24		VS2	B4-2	18	W21/4
V10/2SJ	—	53		VP13S	C18-15	23	see VP13	VS24	B4-2	20	VS2
V10/15A	—	53		VP21	B7-4	20	VPT2	VX2	B7-28	13	
V10/30A	—	53		VP22	MO-1	17		VX2S	C18-31	13	
V10/50A	—	53		VP23	MO-1	17		VX4	B7-35	13	
V15/10DP	—	53		VP41	MO-11	17		VX4S	C18-11	13	
V15/10P	—	53		VP133	MO-11	17		VX13	B7-35	13	
V15/20DP	—	53		VP210	B7-4	17	W21/7	VX13S	C18-11	13	
V15/20P	—	53		VP215	B7-4	17, 20	W21/7				
V15/20R	—	53		VP215B	B7-13	20		W1	—	48	
V15/30DP	—	53		VP215C	B7-4	20		W2	—	48	
V15/30P	—	53		VP1320	B7-5	17	VPTA, VP13	W3	—	48	
V18-28- 1RW	—	79		VP1321	B7-5	17	202VP, VPI3B	W4	—	48	
V20	B5-8	76	UR1C	VP1322	B7-6	17	9D2, 13VPA, VPI3C, VPI3B	W5	—	48	
V25-28- 1RW	—	79		VPT2	B7-4	18		W6	—	48	
V25-40-1W	—	79		VPT4	B5-2	18	9A1, MVSPen, VMP4G, AC/VP1, HP4106	W7	—	48	
V25-56- 1RW	—	79						W8	—	48	
V30	B5-1	75						W9	—	48	
V30/10DP	—	53						W10	—	48	
V30/10P	—	53						W17	B7G-2	20	see DF91
V30/20DP	—	53						W21	B4-2	19	VS210, VS215, S213, 220VS, 210VPT, PM12M, S215VM, VP2, VP210, VP215, VS2, VPT2
V30/20P	—	53									
V30/30DP	—	53									
V30/30P	—	53									
V60/10P	—	54									
V60/20P	—	53									
V60/20P	—	54									
V60/30P	—	54									
V312	B5-13	61									
V453	MO-11	17									
V503	B4-1	38	PX25A, P30/500, DA30								
V914	B5-3	44	DD4, D41, 2D4A								
V2118	B5-9	75									
VFT4	IO-46	89									
VFT6	IO-46	89	6M1, 6U5G, Y61								
VHT2A	B7-1	9	15A2								
VHT4	B7-2	9	15D1								
VHTA	B7-2	9	X30								
VHTS	B7-2	9									
VME4	B7-19	89									

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
W101	B8B-3	19, 21		X41	B7-3	10, 11	20A1, 41STH, AC/TH1, TH4, TX4, 41SPH	XD1.5V	Sm4-1	63	
W107	B7G-22	19, 21						XD2.0V	Sm4-1	63	
W118	B8A-8	19						XD201	—	46	
W119	B9A-10	20						XD202	—	46	
W142	B8A-24	21	see UF41	X42	B7-2	11	15A2, 41MPG, VHT4, MX40	XFG1	Wires	96	
W143	B8B-61	21	see EF22					XFR1	B5A-2	20	
W145	B8A-8	21	10F9					XFR2	B5A-2	20	
W147	IO-8	21	see EF39					XFR3	B5A-4	64	
W148/7H7	B8B-3	21	W148, W81, 7H7	X61M	IO-3	10, 11	6K8, X65	XFR5	B5A-2	20	
W149/7B7	B8B-3	21	W149, 7B7, EF22	X63	IO-1	10, 11	6A8	XFT2	—	51	
W150	B8A-18	21	see EF41	X64	IO-2	11		XFW10	B5A-1	20	
W719	B9A-10	19, 21	see EF85	X65	IO-3	10, 11	6K8, X61M	XFW20	B5A-2	20	
W727	B7G-16	19	see EF93	X71M	IO-3	11	12K8	XFW30	B5A-1	20	
W727/6BA6	B7G-16	21	W727, 6BA6, EF93	X76M	IO-3	10	12K8	XFW40	B5A-1	20	
W729	B9A-10	20, 21		X78	B7G-48	10, 11		XFW50	B5A-1	20	
W739	B7G-64	20		X79	B9A-21	10, 11		XFY10	B5A-1	31	
WD119	B9A-12	20	see UBF89	X81	B8B-8	10	7S7	XFY11	B5A-1	30	
WD142	B8A-12	21	see UAF42	X101	B8B-8	10, 11		XFY12	B5A-1	30	
WD709	B9A-12	19, 24	see EBF80	X109	B9A-21	10, 11		XFY14	B5A-1	31	
WG4A	—	48		X118	B8A-3	10		XFY15	B5A-1	31	
WG4B	—	48		X119	B9A-24	10	see UCH81	XFY21	B5A-1	31	
WG5A	—	48		X142	—	11	see UCH42/ X142	XFY23	B5A-1	31	
WG5B	—	48		X143	—	11	see ECH21/ X143	XFP31	B5A-1	31	
WG6A	—	48		X145	B8A-3	11	10C1	XFY32	B5A-1	31	
WG7B	—	48		X147	—	11	see ECH35/ X147	XFY33	B5A-1	31	
WG7C	—	48		X148/7S7	B8B-8	11		XFY41	B5A-1	31	
WG7D	—	48		X150	—	11	see ECH42/ X150	XFY43	B5A-1	31	
WX1	—	48		X719	—	10	see ECH81/ X719	XFY51	B5A-1	31	
WX2	—	48		X727	B7G-29	10	see EK90	XFY53	B5A-1	31	
WX3	—	48		X727/6BE6	B7G-29	11	EK90, X727, 6BE6	XFY54	B5A-1	31	
WX4	—	48		XA101	—	50		XG2	B8D-10	96	
WX5	—	48		XA102	—	50		XG3	—	96	
WX7	—	48		XA111	—	50		XH1.5V	Sm4-1	63	
WX8	—	48		XA112	—	50		XH2.0V	Sm4-1	63	
WX10	—	48		XA121	—	50		XHP1.5V	Sm5-3	30	
WX11	—	48		XA122	—	50		XLO1.5V	Sm4-1	63	
WX12	—	48		XA123	—	50		XLO2.0V	Sm4-1	64	
WX13	—	48		XA124	—	50		XL1.5V	Sm4-1	63	
WX14	—	48		XA125	—	50		XL2.0V	Sm4-1	63	
WX15	—	48		XA126	—	50		XP1.5V	Sm4-1	31	
				XA131	—	50		XP2.0V	Sm4-1	31	
				XA141	—	50		XR6	B8D-4	20	
				XA142	—	50		XR7	B8D-5	20	
				XA143	—	50		XR8	B8D-8	64	
X14	IO-76	10	1A7, DK32	XA151	—	50		XS101	—	49	
X17	B7G-3	10, 11	see DK91/ X17	XA152	—	50		XSG1.5V	Sm4-2	20	
X18	B7G-54	10	1AC6, 1C2, DK92	XA161	—	50		XSG2.0V	Sm4-2	20	
		11	see DK99	XA162	—	50		XU604	—	83	
X20	B7G-54	10	see DK92/ X20	XA701	—	50		XVS2.0V	Sm4-2	20	
		11	see DK92	XA702	—	50		XW0.75A	B5A-1	20	
X21	B7-1	10	210PG, X22, FC2A, VHT2A, VO2	XA703	—	50		XW0.75B	B5A-1	20	
X22	B7-1	10, 11	X21, 210PG, FC2, VHT2, VO2	XB1	B7G-57	90		XW1.5V	Sm5-1	20	
X23	B7-34	10	X24, 220TH, TH2	XB2	B7G-57	90		XW2.0V	Sm5-2	20	
X24	B7-3	10	220TH, X23, TH2	XB102	—	50		XY1.4A	B5A-1	31	
X25	B7-34	10	see DK96/ X25	XB103	—	50		XY1.4B	B5A-1	31	
X30	B7-2	11	15D1, VHTS	XB104	—	50		XY1.4C	B5A-1	31	
X31	B7-3	11	20D2	XB112	—	50		XY1.5V	Sm5-1	31	
X32	B7-2	11	see X30	XB113	—	50		XY2.0V	Sm5-1	31	
				XB121	—	50					
				XC13	Wires	96		Y13	B7-24	31	
				XC18	Wires	96		Y25	B8D-9	89	1M1, 1M3, DM70
				XC23	Wires	96		Y61	IO-46	89	6M1, VFT6, 6U5G
				XC24	Wires	96		Y62	IO-46	89	6U5G, VHT6, Y61, 6M1
				XC101	—	50		Y63	IO-46	89	6U5G, 63ME, VFT6
				XC121	—	50		Y64	IO-46	89	
				XC131	—	50		Y65	IO-46	89	
				XC141	—	50		Y119	B9A-19	89	
				XC142	—	50					
				XC171	—	51					

Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents	Valve	Base	Pages	Equivalents
Y220	B4-7	31		Z22H16X	—	78		ZE22H-	—	78	
Y220	B5-6	31	KT2, PT2	Z22H17X	—	78		16X	—		
Y230	B5-6	31		Z22Met	B7-4	21		ZE22H-	—	78	
				Z26	B7-24	31		18X	—		
				Z46H10X	—	78		ZR10	—	83	
				to Z46H440X				ZR10T	—	83	
				Z48H10X	—	78		ZR10TR	—	83	
				to Z48H440X				ZR11	—	83	
				Z62	IO-8	19, 21		ZR11T	—	83	
				Z63	IO-8	19, 21	6J7, KTZ63	ZR11TR	—	83	
				Z66	IO-8	19, 21		ZR12	—	83	
				Z77	B7G-21	19, 21	see EF91	ZR12T	—	93	
				Z90	B9G-1	19	EF50, 63SPT	ZR12TR	—	83	
				Z142	B8A-8	21	see UF42	ZR13	—	83	
				Z145	B8A-17	21	10F1	ZR13T	—	83	
				Z150	B8A-8	21	see EF42	ZR13TR	—	83	
				Z152	B9A-10	21	see EF80	ZR14	—	83	
				Z220	B4-7	31		ZR14T	—	83	
				Z220	B5-6	31		ZR14TR	—	83	
				Z300T/	IO-108	96		ZR15	—	83	
				1267				ZR15T	—	83	
				Z309	B9A-22	19		ZR15TR	—	83	
				Z319	B9A-46	19		ZR20	—	83	
				Z319/	B9A-46	21		ZR20R	—	83	
				635I				ZR21	—	83	
				Z329	B9A-10	19		ZR21R	—	83	
				Z359	B9A-47	19		ZR22	—	83	
				Z700U	Wires	96		ZR22R	—	83	
				Z700W	Wires	96		ZR23	—	83	
				Z701U	B8D	96		ZR23R	—	83	
				Z719	B9A-10	19, 21	Z152, EF80,	ZR24	—	83	
							6BX6,	ZR24R	—	83	
							6BW7	ZS7	—	46	
				Z729	B9A-23	19, 20, 21,	see EF86	ZS8	—	46	
						63, 64		ZS10A	—	46	
				Z749	B9A-10	19		ZS10B	—	46	
				Z759	B9A-48	19		ZS20A	—	46	
				Z800U	B9A-58	96		ZS20B	—	46	
				Z801U	B9A-57	96		ZS21	—	46	
				Z803U	B9A-51	96		ZS22	—	46	
				Z804U	B9A-59	96		ZS24	—	83	
				Z900T	B7G-71	96		ZS25	—	83	
				ZC12H-	—	78		ZS30A	—	83	
				16XFE				ZS30B	—	83	
				ZC12H-	—	78		ZS31A	—	83	
				17XFE				ZS31B	—	83	
				ZC12H-	—	79		ZS32A	—	83	
				18X				ZS32B	—	83	
				ZC13D-	—	78	SEI 11	ZS33A	—	83	
				8XE				ZS33B	—	83	
				ZC13D-	—	78	SEI 12	ZS34A	—	83	
				9XE				ZS34B	—	83	
				ZC13H-	—	78	SEI 7	ZS40	—	46	
				16XE				ZS41	—	46	
				ZC13H-	—	78		ZS42	—	46	
				16XF				ZS50	—	84	
				ZC13H-	—	79	SEI 9	ZS51	—	84	
				17XE				ZS52	—	84	
				ZC22D-	—	78		ZS53	—	84	
				9X				ZT20	—	51	
				ZD	B5-8	44		ZT21	—	51	
				ZD17	B7G-5	19	1S5, 1FD9,	ZT22	—	51	
							DAF91	ZT23	—	51	
				ZD25	B7G-5	20	see DAF96	ZW2	—	46	
Z2A33F	—	94									
Z2A36F	—	94									
Z2A39F	—	94									
Z2A43F	—	94									
Z2A47F	—	94									
Z2A51F	—	94									
Z2A56F	—	94									
Z2A62F	—	94									
Z2A68F	—	94									
Z2A75F	—	94									
Z2A82F	—	94									
Z2A91F	—	94									
Z2A100F	—	94									
Z2A110F	—	94									
Z2A120F	—	94									
Z2A130F	—	94									
Z2A150F	—	94									
Z11B1X	—	78									
Z11H8X	—	77									
Z11H9X	—	78									
Z11H16X	—	77									
Z11H17X	—	78									
Z12B1X	—	78									
Z12H8X	—	78									
Z12H9X	—	78									
Z12H14XF	—	78									
Z12H16X	—	78									
Z12H17X	—	78									
Z13B1X	—	78									
Z13H8X	—	78									
Z13H9X	—	78									
Z13H16X	—	78									
Z13H17X	—	78									
Z14	IO-77	19, 20	DF33, SPT2, 1N5								
Z21	B4-2	19	HP210/4, HP215, PM12, PM12A, SP2, SP210, SP215, SP215B, 215S, 220S								
Z21B1X	—	78									
Z21H8X	—	78									
Z21H9X	—	78									
Z21H16X	—	78									
Z21H17X	—	78									
Z21Met	B4-2	21									
Z22	B7-4	19	HP210/7, 210SPT								
Z22B1X	—	78									
Z22H8X	—	78									
Z22H9X	—	78									

Iliffe Technical Books

Basic Mathematics for Radio and Electronics (Third Edition)

F. M. Colebrook, B.Sc., D.I.C., A.C.G.I.

Revised and enlarged by J. W. Head, M.A. (Cantab.)

A complete course in basic mathematics for engineering students of all kinds, both those requiring a refresher course and those without previous knowledge.

17s. 6d. net, by post 18s. 6d.

The Oscilloscope at Work

A. Haas and R. Hallows, M.A. (Cantab.), M.I.E.E.

An up-to-date handbook explaining the characteristics of the cathode-ray oscilloscope and its many uses in servicing radio receivers, amplifiers and television equipment.

18s. net, by post 19s.

Microwave Data Tables

A. E. Booth, M.I.R.E., Graduate I.R.E.

An accurate and labour-saving aid for computations involving basic microwave quantities which occur continually in design and development work on waveguides and similar transmission lines.

27s. 6d. net, by post 28s. 8d.

Television Receiving Equipment (Fourth Edition)

W. T. Cocking, M.I.E.E.

Deals comprehensively with television receiving equipment and gives many practical details and design data.

30s. net, by post 31s. 9d.

Principles of Frequency Modulation

B. S. Camies.

Presents a complete treatment of frequency modulation, including its applications in radio transmitters and receivers, and radar.

21s. net, by post 21s. 10d.

Principles of Semiconductors

M. G. Scroggie, B.Sc., M.I.E.E.

Covers the many applications of the use of semiconducting materials and does not limit itself to the study of transistors.

21s. net, by post 21s. 11d.

Second Thoughts on Radio Theory

"Cathode Ray" of Wireless World

Articles reprinted from *Wireless World* in which the author examines various aspects of elementary radio science, explains them clearly, and shows that there may be more behind them than is apparent from the usual textbook.

25s. net, by post 26s. 4d.

Foundations of Wireless (Seventh Edition)

M. G. Scroggie, B.Sc., M.I.E.E.

Explains the whole basic theory of radio from the most elementary principles. Includes chapters on the fundamental laws of electricity and radio, the theory of valves, transmitters and receivers, transistors, semi-conductors and an introduction to television and radar.

16s. net, by post 17s. 4d.

Radio Circuits, A Step-by-step Survey (Fourth Edition)

W. E. Miller, M.A. (Cantab.), M.Brit.I.R.E.

Revised by E. A. W. Spreadbury, M.Brit.I.R.E.

Explains the workings of a modern superheterodyne receiver, stage by stage, from aerial to loudspeaker, in a simple yet practical manner which misses none of the details.

15s. net, by post 15s. 10d.

Radio Designer's Handbook (Fourth Edition, revised)

Edited by F. Langford-Smith, B.Sc., B.E., Senior Member I.R.E. (U.S.A.), A.M.I.E. (Aust.).

A comprehensive reference book which contains a vast amount of data in a readily accessible form, especially intended for those interested in the design and application of radio receivers or audio amplifiers.

55s. net, by post 57s. 3d.

Television Explained (Seventh Edition)

W. E. Miller, M.A. (Cantab.), M.Brit.I.R.E.

Revised by E. A. W. Spreadbury, M.Brit.I.R.E., Associate Editor of *Wireless and Electrical Trades*.

Gives in simple terms and non-mathematical language a step-by-step survey of modern television receivers and aerial systems for multi-channel reception.

12s. 6d. net, by post 13s. 5d.

Principles of Transistor Circuits (Second Edition)

S. W. Amos, B.Sc. (Hons.), A.M.I.E.E.

This book, by a member of the Engineering Training Department of the BBC, provides an invaluable introduction to the design of transistorised equipment for professional designers, students and amateur constructors.

21s. net, by post 22s.

Wireless Servicing Manual (Ninth Edition)

W. T. Cocking, M.I.E.E.

Essential testing apparatus is described and logical methods of deducing and remedying defects are explained. A chapter devoted to the servicing of frequency modulated v.h.f. receivers is included.

17s. 6d. net, by post 18s. 8d.

Obtainable from leading booksellers
Complete list of Radio and Television books available free on request from

ILIFFE BOOKS LTD., DORSET HOUSE, STAMFORD STREET, LONDON, S.E.1