


# AUDIO ENGINEERING

JULY  
1949

35¢

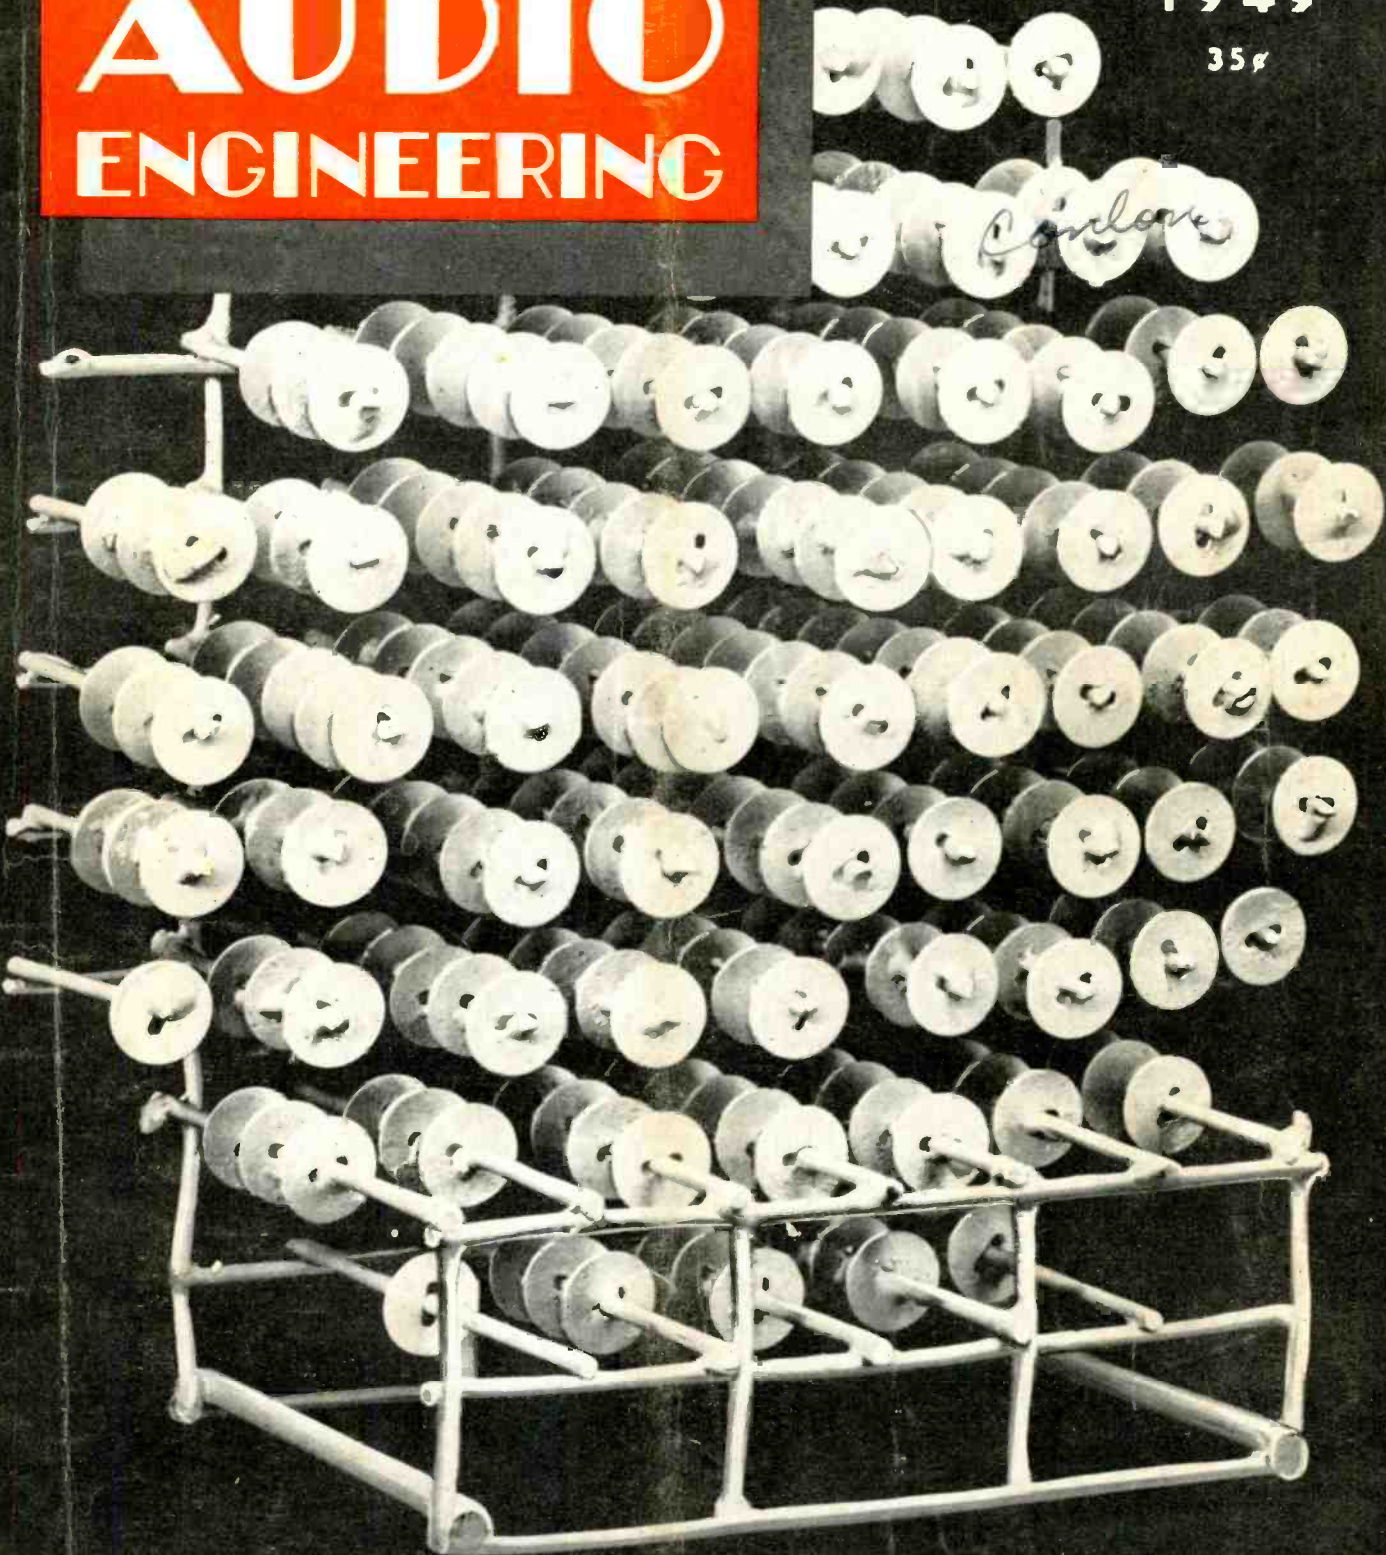


THE JOURNAL FOR SOUND ENGINEERS

[www.americanradiohistory.com](http://www.americanradiohistory.com)



# NO MORE HOT-WEATHER PROBLEMS

... when you

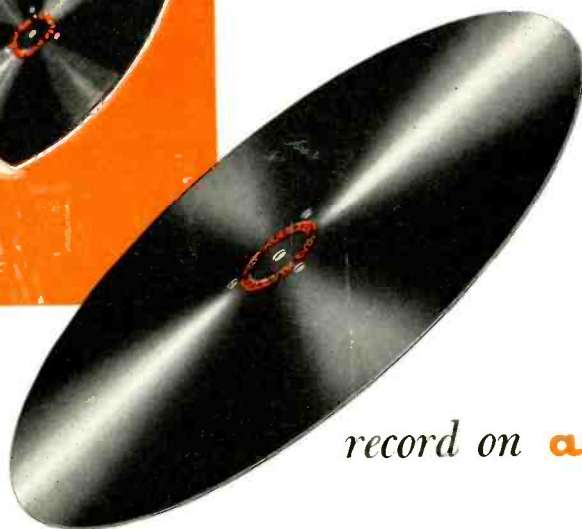

record on **audiodiscs**\*

To the recordist, the hot, summer months have generally meant plenty of trouble—not because of the heat, but due to the accompanying high humidity. For moisture which is absorbed by the lacquer of a recording disc has a serious effect on the cutting characteristics. The noise level increases progressively while recording, and the cut gets greyer and greyer. This problem has affected the entire lacquer disc industry. But, with Audiodiscs, it is a problem no longer. You can now record as well on the hottest and dampest day as you could on a crisp day in fall or winter.

This freedom from humidity troubles is the result of an exclusive Audiodisc improvement perfected in 1947. It is an improvement which goes far beyond the control of atmospheric conditions during manufacture—for that alone doesn't prevent moisture absorp-

tion later on. The moisture problem has been solved at its most vulnerable point—in the lacquer itself!

By the addition of a special moisture resisting agent—without any change in the basic formulation—Audiodisc lacquer has been made *permanently* resistant to humidity. Its outstanding “all weather” performance has been proved by countless tests in our “weather room”, under the most severe conditions of temperature and humidity. But the most conclusive proof of all has come from the field. For, during the summer of 1948, one of the most humid on record, none of our customers have reported any difficulties in recording or reproduction due to moisture conditions.

See for yourself what a big difference this improvement can make in *your* summer recordings. Ask your dealer for Audiodiscs!

Audiodiscs are manufactured in the U.S.A. under exclusive license from PYRAL, S.A.R.L., Paris

## AUDIO DEVICES, INC.


444 MADISON AVE., NEW YORK 22, N. Y.

EXPORT DEPT.: ROCKE INTERNATIONAL, 13 EAST 40TH ST., NEW YORK 16, N. Y.

\*Reg. U.S. Pat. Off.



**SYLVANIA TUBES ARE RIGHT AT HOME  
IN THE FINEST HOME RECEIVERS**

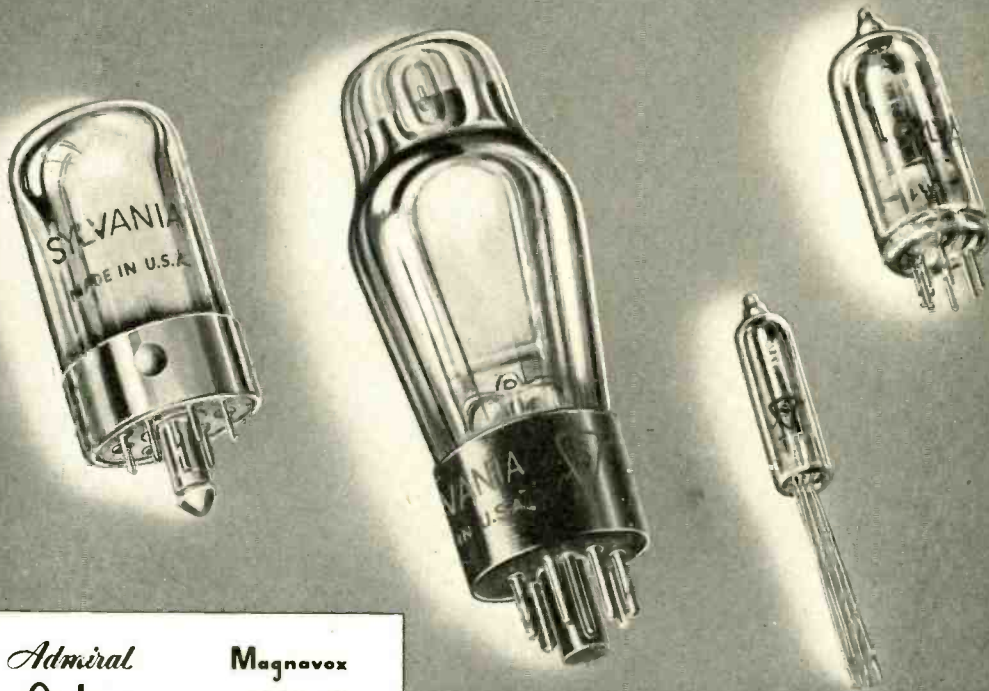

- |                        |                                     |
|------------------------|-------------------------------------|
| <i>Admiral</i>         | <b>Magnavox</b>                     |
| <i>Andrea</i>          | <i>Motorola</i>                     |
| <b>ARVIN</b>           | <b>National</b>                     |
| <i>Automatic Radio</i> | <b>Olympic</b>                      |
| <i>Belmont</i>         | <small>Radio and Television</small> |
| <i>Bendix</i>          | <b>PHILCO</b>                       |
| <i>Radio</i>           | <b>Regal</b>                        |
| <b>CROSBLEY</b>        | <i>Sentinel Radio</i>               |
| <i>Emerson Radio</i>   | <i>Silvertone</i>                   |
| <b>ESPEY</b>           | <i>Spartan</i>                      |
| <b>FADA</b>            | <small>STROMBERG-CARLSON</small>    |
| <small>Radio</small>   | <i>Tele-tone</i>                    |
| <i>Farnsworth</i>      | <b>Temple</b>                       |
| <b>GAROD RADIO</b>     | <i>TRAV-LER</i>                     |
| <b>GLOBE</b>           | <small>Westinghouse</small>         |
| <i>hallicrafters</i>   | <b>ZENITH</b>                       |
| <b>Hoffman</b>         | <small>RADIO</small>                |



Sub-miniatures, seven- and nine-pin miniatures, standard types, and the great Lock-In radio tubes are all included in the famous Sylvania line . . . all represented in the leading makes of home receivers—from portable models to console combinations and television receivers.

It is the high quality of these Sylvania tubes that has made them preferred . . . has made them famous throughout the world.

For full information about Sylvania tubes, see a Sylvania Distributor, or write Sylvania Electric Products Inc., Radio Tube Division, Emporium, Pa.

**SYLVANIA  
ELECTRIC**

RADIO TUBES; CATHODE RAY TUBES; ELECTRONIC DEVICES; FLUORESCENT LAMPS, FIXTURES, WIRING DEVICES; PHOTOLAMPS; ELECTRIC LIGHT BULBS


# FREED "PRODUCTS of EXTENSIVE RESEARCH"

## OUTSTANDING ADDITIONS TO OUR LINES OF Instruments & Components


### NEW HI Q MINIATURE TOROIDAL COILS

### HIGH FIDELITY OUTPUT TRANSFORMERS

FAMOUS  
FREED  
QUALITY



Size  $\frac{7}{8}$ " D. x  $\frac{3}{8}$ " — Wt.  $\frac{3}{4}$  ounce.  
 Type TI-5 Frequency range 1000 cycles-15,000 cycles  
 Type TI-7 Frequency range 10,000 cycles-100,000 cycles  
 High quality toroidal coils wound on molybdenum permalloy dust cores. Can be supplied in hermetically sealed cans, commercial type construction or open units.



Type No.	Primary matches following typical tubes	Primary impedance	Secondary impedance	# Taps	Maximum load
TI706	Full pull 2A7, 2A7G, 2A7C, 2A7D, 2A7E, 2A7F, 2A7G, 2A7H, 2A7J, 2A7K, 2A7L, 2A7M, 2A7N, 2A7O, 2A7P, 2A7Q, 2A7R, 2A7S, 2A7T, 2A7U, 2A7V, 2A7W, 2A7X, 2A7Y, 2A7Z, 2A7AA, 2A7AB, 2A7AC, 2A7AD, 2A7AE, 2A7AF, 2A7AG, 2A7AH, 2A7AI, 2A7AJ, 2A7AK, 2A7AL, 2A7AM, 2A7AN, 2A7AO, 2A7AP, 2A7AQ, 2A7AR, 2A7AS, 2A7AT, 2A7AU, 2A7AV, 2A7AW, 2A7AX, 2A7AY, 2A7AZ, 2A7BA, 2A7BB, 2A7BC, 2A7BD, 2A7BE, 2A7BF, 2A7BG, 2A7BH, 2A7BI, 2A7BJ, 2A7BK, 2A7BL, 2A7BM, 2A7BN, 2A7BO, 2A7BP, 2A7BQ, 2A7BR, 2A7BS, 2A7BT, 2A7BU, 2A7BV, 2A7BW, 2A7BX, 2A7BY, 2A7BZ, 2A7CA, 2A7CB, 2A7CC, 2A7CD, 2A7CE, 2A7CF, 2A7CG, 2A7CH, 2A7CI, 2A7CJ, 2A7CK, 2A7CL, 2A7CM, 2A7CN, 2A7CO, 2A7CP, 2A7CQ, 2A7CR, 2A7CS, 2A7CT, 2A7CU, 2A7CV, 2A7CW, 2A7CX, 2A7CY, 2A7CZ, 2A7DA, 2A7DB, 2A7DC, 2A7DD, 2A7DE, 2A7DF, 2A7DG, 2A7DH, 2A7DI, 2A7DJ, 2A7DK, 2A7DL, 2A7DM, 2A7DN, 2A7DO, 2A7DP, 2A7DQ, 2A7DR, 2A7DS, 2A7DT, 2A7DU, 2A7DV, 2A7DW, 2A7DX, 2A7DY, 2A7DZ, 2A7EA, 2A7EB, 2A7EC, 2A7ED, 2A7EE, 2A7EF, 2A7EG, 2A7EH, 2A7EI, 2A7EJ, 2A7EK, 2A7EL, 2A7EM, 2A7EN, 2A7EO, 2A7EP, 2A7EQ, 2A7ER, 2A7ES, 2A7ET, 2A7EU, 2A7EV, 2A7EW, 2A7EX, 2A7EY, 2A7EZ, 2A7FA, 2A7FB, 2A7FC, 2A7FD, 2A7FE, 2A7FF, 2A7FG, 2A7FH, 2A7FI, 2A7FJ, 2A7FK, 2A7FL, 2A7FM, 2A7FN, 2A7FO, 2A7FP, 2A7FQ, 2A7FR, 2A7FS, 2A7FT, 2A7FU, 2A7FV, 2A7FW, 2A7FX, 2A7FY, 2A7FZ, 2A7GA, 2A7GB, 2A7GC, 2A7GD, 2A7GE, 2A7GF, 2A7GG, 2A7GH, 2A7GI, 2A7GJ, 2A7GK, 2A7GL, 2A7GM, 2A7GN, 2A7GO, 2A7GP, 2A7GQ, 2A7GR, 2A7GS, 2A7GT, 2A7GU, 2A7GV, 2A7GW, 2A7GX, 2A7GY, 2A7GZ, 2A7HA, 2A7HB, 2A7HC, 2A7HD, 2A7HE, 2A7HF, 2A7HG, 2A7HH, 2A7HI, 2A7HJ, 2A7HK, 2A7HL, 2A7HM, 2A7HN, 2A7HO, 2A7HP, 2A7HQ, 2A7HR, 2A7HS, 2A7HT, 2A7HU, 2A7HV, 2A7HW, 2A7HX, 2A7HY, 2A7HZ, 2A7IA, 2A7IB, 2A7IC, 2A7ID, 2A7IE, 2A7IF, 2A7IG, 2A7IH, 2A7II, 2A7IJ, 2A7IK, 2A7IL, 2A7IM, 2A7IN, 2A7IO, 2A7IP, 2A7IQ, 2A7IR, 2A7IS, 2A7IT, 2A7IU, 2A7IV, 2A7IW, 2A7IX, 2A7IY, 2A7IZ, 2A7JA, 2A7JB, 2A7JC, 2A7JD, 2A7JE, 2A7JF, 2A7JG, 2A7JH, 2A7JI, 2A7JJ, 2A7JK, 2A7JL, 2A7JM, 2A7JN, 2A7JO, 2A7JP, 2A7JQ, 2A7JR, 2A7JS, 2A7JT, 2A7JU, 2A7JV, 2A7JW, 2A7JX, 2A7JY, 2A7JZ, 2A7KA, 2A7KB, 2A7KC, 2A7KD, 2A7KE, 2A7KF, 2A7KG, 2A7KH, 2A7KI, 2A7KJ, 2A7KK, 2A7KL, 2A7KM, 2A7KN, 2A7KO, 2A7KP, 2A7KQ, 2A7KR, 2A7KS, 2A7KT, 2A7KU, 2A7KV, 2A7KW, 2A7KX, 2A7KY, 2A7KZ, 2A7LA, 2A7LB, 2A7LC, 2A7LD, 2A7LE, 2A7LF, 2A7LG, 2A7LH, 2A7LI, 2A7LJ, 2A7LK, 2A7LL, 2A7LM, 2A7LN, 2A7LO, 2A7LP, 2A7LQ, 2A7LR, 2A7LS, 2A7LT, 2A7LU, 2A7LV, 2A7LW, 2A7LX, 2A7LY, 2A7LZ, 2A7MA, 2A7MB, 2A7MC, 2A7MD, 2A7ME, 2A7MF, 2A7MG, 2A7MH, 2A7MI, 2A7MJ, 2A7MK, 2A7ML, 2A7MM, 2A7MN, 2A7MO, 2A7MP, 2A7MQ, 2A7MR, 2A7MS, 2A7MT, 2A7MU, 2A7MV, 2A7MW, 2A7MX, 2A7MY, 2A7MZ, 2A7NA, 2A7NB, 2A7NC, 2A7ND, 2A7NE, 2A7NF, 2A7NG, 2A7NH, 2A7NI, 2A7NJ, 2A7NK, 2A7NL, 2A7NM, 2A7NN, 2A7NO, 2A7NP, 2A7NQ, 2A7NR, 2A7NS, 2A7NT, 2A7NU, 2A7NV, 2A7NW, 2A7NX, 2A7NY, 2A7NZ, 2A7OA, 2A7OB, 2A7OC, 2A7OD, 2A7OE, 2A7OF, 2A7OG, 2A7OH, 2A7OI, 2A7OJ, 2A7OK, 2A7OL, 2A7OM, 2A7ON, 2A7OO, 2A7OP, 2A7OQ, 2A7OR, 2A7OS, 2A7OT, 2A7OU, 2A7OV, 2A7OW, 2A7OX, 2A7OY, 2A7OZ, 2A7PA, 2A7PB, 2A7PC, 2A7PD, 2A7PE, 2A7PF, 2A7PG, 2A7PH, 2A7PI, 2A7PJ, 2A7PK, 2A7PL, 2A7PM, 2A7PN, 2A7PO, 2A7PP, 2A7PQ, 2A7PR, 2A7PS, 2A7PT, 2A7PU, 2A7PV, 2A7PW, 2A7PX, 2A7PY, 2A7PZ, 2A7QA, 2A7QB, 2A7QC, 2A7QD, 2A7QE, 2A7QF, 2A7QG, 2A7QH, 2A7QI, 2A7QJ, 2A7QK, 2A7QL, 2A7QM, 2A7QN, 2A7QO, 2A7QP, 2A7QQ, 2A7QR, 2A7QS, 2A7QT, 2A7QU, 2A7QV, 2A7QW, 2A7QX, 2A7QY, 2A7QZ, 2A7RA, 2A7RB, 2A7RC, 2A7RD, 2A7RE, 2A7RF, 2A7RG, 2A7RH, 2A7RI, 2A7RJ, 2A7RK, 2A7RL, 2A7RM, 2A7RN, 2A7RO, 2A7RP, 2A7RQ, 2A7RR, 2A7RS, 2A7RT, 2A7RU, 2A7RV, 2A7RW, 2A7RX, 2A7RY, 2A7RZ, 2A7SA, 2A7SB, 2A7SC, 2A7SD, 2A7SE, 2A7SF, 2A7SG, 2A7SH, 2A7SI, 2A7SJ, 2A7SK, 2A7SL, 2A7SM, 2A7SN, 2A7SO, 2A7SP, 2A7SQ, 2A7SR, 2A7SS, 2A7ST, 2A7SU, 2A7SV, 2A7SW, 2A7SX, 2A7SY, 2A7SZ, 2A7TA, 2A7TB, 2A7TC, 2A7TD, 2A7TE, 2A7TF, 2A7TG, 2A7TH, 2A7TI, 2A7TJ, 2A7TK, 2A7TL, 2A7TM, 2A7TN, 2A7TO, 2A7TP, 2A7TQ, 2A7TR, 2A7TS, 2A7TT, 2A7TU, 2A7TV, 2A7TW, 2A7TX, 2A7TY, 2A7TZ, 2A7UA, 2A7UB, 2A7UC, 2A7UD, 2A7UE, 2A7UF, 2A7UG, 2A7UH, 2A7UI, 2A7UJ, 2A7UK, 2A7UL, 2A7UM, 2A7UN, 2A7UO, 2A7UP, 2A7UQ, 2A7UR, 2A7US, 2A7UT, 2A7UU, 2A7UV, 2A7UW, 2A7UX, 2A7UY, 2A7UZ, 2A7VA, 2A7VB, 2A7VC, 2A7VD, 2A7VE, 2A7VF, 2A7VG, 2A7VH, 2A7VI, 2A7VJ, 2A7VK, 2A7VL, 2A7VM, 2A7VN, 2A7VO, 2A7VP, 2A7VQ, 2A7VR, 2A7VS, 2A7VT, 2A7VU, 2A7VV, 2A7VW, 2A7VX, 2A7VY, 2A7VZ, 2A7WA, 2A7WB, 2A7WC, 2A7WD, 2A7WE, 2A7WF, 2A7WG, 2A7WH, 2A7WI, 2A7WJ, 2A7WK, 2A7WL, 2A7WM, 2A7WN, 2A7WO, 2A7WP, 2A7WQ, 2A7WR, 2A7WS, 2A7WT, 2A7WU, 2A7WV, 2A7WW, 2A7WX, 2A7WY, 2A7WZ, 2A7XA, 2A7XB, 2A7XC, 2A7XD, 2A7XE, 2A7XF, 2A7XG, 2A7XH, 2A7XI, 2A7XJ, 2A7XK, 2A7XL, 2A7XM, 2A7XN, 2A7XO, 2A7XP, 2A7XQ, 2A7XR, 2A7XS, 2A7XT, 2A7XU, 2A7XV, 2A7XW, 2A7XX, 2A7XY, 2A7XZ, 2A7YA, 2A7YB, 2A7YC, 2A7YD, 2A7YE, 2A7YF, 2A7YG, 2A7YH, 2A7YI, 2A7YJ, 2A7YK, 2A7YL, 2A7YM, 2A7YN, 2A7YO, 2A7YP, 2A7YQ, 2A7YR, 2A7YS, 2A7YT, 2A7YU, 2A7YV, 2A7YW, 2A7YX, 2A7YY, 2A7YZ, 2A7ZA, 2A7ZB, 2A7ZC, 2A7ZD, 2A7ZE, 2A7ZF, 2A7ZG, 2A7ZH, 2A7ZI, 2A7ZJ, 2A7ZK, 2A7ZL, 2A7ZM, 2A7ZN, 2A7ZO, 2A7ZP, 2A7ZQ, 2A7ZR, 2A7ZS, 2A7ZT, 2A7ZU, 2A7ZV, 2A7ZW, 2A7ZX, 2A7ZY, 2A7ZZ				

### PRECISION LABORATORY EQUIPMENT

#### #1150 UNIVERSAL BRIDGE



Frequency Range — 20 cycles-20,000 cycles.  
 An Indispensable Laboratory Instrument for measurements of Inductors, Capacitors, and determination of Resistive and reactive components of impedances. Used as Maxwell Bridge, Hay Bridge, Resonance Bridge, Series Resistance Condenser Bridge, Parallel Resistance Condenser Bridge. 1% accuracy.

FAMOUS  
FREED  
ACCURACY

#### #1210 NULL DETECTOR AND VACUUM TUBE VOLTMETER



Designed for A.C. Bridge Measurements. Provides simultaneous measurement of the voltage across the unknown and the balance of the bridge. Vacuum tube voltmeter. Sensitivity .1, 1, 10, 100 volts. Input Impedance 50 megohms shunted by 20 mmfd. Frequency range 20 cycles-20,000 cycles. Null Detector—gain 94 Db. Selective Circuits for 60 cycles — 400 cycles — 1000 cycles. Frequency range 20 cycles-30,000 cycles.

### FREED HERMETICALLY SEALED COMPONENTS CLASS A GRADE 1 COMPONENTS TO MEET JAN—T—27 SPECIFICATIONS.

FAMOUS  
FREED  
DEPENDABILITY



MANUFACTURERS OF  
 POWER TRANSFORMERS  
 FILTER REACTORS  
 AUDIO TRANSFORMERS  
 SUPERSONIC TRANSFORMERS  
 WAVE FILTERS  
 HI-Q COILS  
 DISCRIMINATORS  
 SATURABLE REACTORS  
 PULSE TRANSFORMERS  
 CHARGING CHOKES

SEND FOR THE *new* FREED CATALOG

**FREED TRANSFORMER CO., Inc.**  
 DEPT. AY 1718-36 WEIRFIELD ST., (RIDGEWOOD) BROOKLYN 27, NEW YORK

# AUDIO ENGINEERING



Successor to **RADIO**

D. S. Potts, Publisher

Lawrence LeKashman, Asst. Editor  
 Louisa B. DeSoto, Edit. Prod. Mgr.  
 David Saltman, Production Manager

C. G. McProud, Editor

S. L. Cahn, Adv. Director  
 H. N. Reizes, Adv. Mgr.  
 L. B. Devine, Circ. Mgr.

## Editorial Advisory Board

Howard A. Chinn  
 John D. Colwin  
 C. J. LeBel  
 J. P. Maxfield  
 George M. Nixon  
 Winston Wells  
 S. Young White

## Representatives

Sanford R. Cowan, Mid-West Sales  
 342 Madison Ave., New York 17, N. Y.  
 James C. Galloway, Pacific Coast Sales  
 816 W. 5th St., Los Angeles 13, Calif.  
 Dale International Publications, Ltd.  
 105 Bolsover St., London W. 1, England  
 Harris & Floyd, 297 Swanston St.  
 Melbourne C. I., Victoria, Australia

Established 1917

CONTENTS JULY, 1949

Vol. 33, No. 7

Letters .....	4
Editor's Report .....	8
New Portable Audio Amplifier for AM-FM-TV— <i>W. W. Dean</i> .....	11
Auditory Component Control for the Legitimate Theatre— <i>John H. Beaumont</i> .....	15
Importance of Groove Fit in Lateral Recordings— <i>D. R. Andrews</i> .....	18
Problems in Audio Engineering, Part III— <i>Lewis S. Goodfriend</i> .....	20
Record Revue— <i>Edward Tatnall Canby</i> .....	22
New Products .....	21
The Language of Audio— <i>John D. Goodell</i> .....	25
Techni-Briefs .....	38
Advertising Index .....	40


### COVER

Bell Telephone Laboratories' "disc" lens, by means of which sound waves are delayed and thereby focused. Consisting of metal discs arranged in an open structure, the lens was built originally for three-centimeter microwaves, but can be used for simultaneous focusing of microwaves and sound waves.

AUDIO ENGINEERING (title registered U. S. Pat. Off.) is published monthly at New York, N. Y., by Radio Magazines, Inc. D. S. Potts, President; Lawrence LeKashman, Vice Pres. Executive and Editorial Offices at 342 Madison Avenue, New York 17, N. Y. Subscription rates—United States, U. S. Possessions and Canada, \$3.00 for 1 year, \$5.00 for 2 years; elsewhere \$4.00 per year. Single copies 35c. Printed in U. S. A. All rights reserved. Entire contents copyright 1949 by Radio Magazines, Inc. Entered as Second Class Matter July 29, 1948 at the Post Office, New York, N. Y., under the Act of March 3, 1879.

# TAPE OR DISK

## YOU CHOOSE FAIRCHILD FOR TOP PERFORMANCE

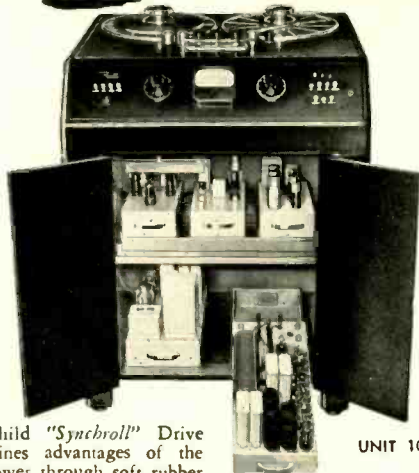

UNIT 100

★ The Fairchild "Synchroll" Drive System combines advantages of the transfer of power through soft rubber idlers with those of direct gear control of the capstan. This unique development of Fairchild results in a *no-slip synchronous* tape drive.

★ High Frequency Flutter causes roughness in a reproduced sine wave tone. *Smooth motion* in the Fairchild Tape Recorder is apparent in the *cleanliness* of simple musical tones.

★ Hum problems are generally recognized as inherent in magnetic recorders. The high efficiency of Fairchild Playback Head design and amplifier construction results in a hum measurement at least *68 db down*. (ref. 2% distortion).

THE FAIRCHILD PROFESSIONAL TAPE RECORDER easily outperforms requirements set by NAB Standards. Features include: "plug-in" type construction, both mechanical and electrical, for uninterrupted service; interlock system to prevent accidental erasing; volume indicator and circuit metering; adjustment of playback head during operation for optimum performance with all tapes; simultaneous monitoring from the tape during actual recording. Major network and recording studios are using Fairchild Tape Recorders. Write for complete information.

### FAIRCHILD SYNCHRONOUS DISK RECORDERS



ACCURATE PROGRAM TIMING—Synchronous direct to the center gear drive for shows "on the nose".

FREEDOM FROM WOW—No slip-page. No musical pitch change to make listeners aware the show is transcribed.

SOUND ON FILM DUBBING—Many of the motion picture sound tracks you hear and enjoy are first recorded on Fairchild Synchronous Disk Recorders.

Above are some of the features that have gained FAIRCHILD the reputation for the finest in recording equipment. Fairchild Synchronous Disk Recorders are manufactured in 3 models; Unit 523 for the finest fixed studio installation; Unit 539K for the small budget studio; Unit 539G (shown above) for console performance in a portable unit. Maintain your reputation for making the finest transcriptions and masters with Fairchild equipment. Write for illustrations and complete specifications.



# Fairchild

RECORDING EQUIPMENT CORPORATION

154TH STREET AND 7TH AVENUE, WHITESTONE, L. I., N. Y.

## — Letters —

Sir:

Your June issue gives me several incentives for letters comment:

(1) Charles Irwin Cohn's letter is strongly reminding of mine (in your July issue of 1947) in which I stressed the psycho-acoustic conditioning of reproduced music listeners by their previous musical experiences with live music, and with reproduced music of varying degrees of quality.

(2) Ted Powell's letter re: (a) Prof. Richardson's conclusions that the attack and decay times of sounds, rather than their harmonic overtones, largely determine their tone quality and (b) transient distortion.

(a) In the *Proceedings of the Radio Club of America*, January 1934, the *Journal of the A.S.A.*, January 1935, and *Proceedings I.R.E.*, November 1936, and elsewhere, I have described my electronic piano, which has controllable attack and decay time period for the hammer-excited string vibration, as translated by capacitance and magnetic pick-ups, amplifier and speaker. With this instrument, a normal piano tone may be made to sound (as reproduced) just like an organ or other wind instrument tone (of moderate duration) with percussive transients removed. Also, with normal percussive attack, the damping rate of the reproduced tone may be greatly increased. Both the attack and decay rates may be continuously varied through wide limits, so that the reproduced tone, always of the same harmonic content (as determined by mixing of the out-puts of several pickups along the string) can be made to sound all the way from the highly damped, banjo type, thru normal piano (attack and decay) to a thoroughly organ-like tone. This I have called "tone envelope control" and is a very important means of controlling "quality", if by that we include more than mere control of the relative amplitudes among the tone partials.


I do not agree that such envelope differences are *more* important than the harmonic (or inharmonic) content of tones or sounds, but they are certainly *equally* important.

(b) I used the term "transient distortion" in 1921, in my electro-phonographic researches, concerning the effects of more or less rapidly damped mechanical and electrical resonances in the recording-reproducing system. In 1931 and later, I tested electronic piano amplifier-reproducer a.f. systems for inter-modulation by striking two piano keys in the 2000-2500 cycle range and separated by say 200-300 cycles in frequency, while listening for the inter-modulation beat tone. (See my letter I.R.E. 1942, page 429, re John K. Hilliard paper on "Distortion Tests by Inter-modulation Method".) This test indicated that power ratings of such a.f. systems were operated (by the total-harmonic-content test for pure tones) by about 400 to 500 per cent.

(3) There is one more matter on which I have speculated for years and have referred to the Harvard Psycho-Acoustics Laboratory (without reply): I listen a lot to sounds of 120-cps frequency, sometimes quite loud, from loud speakers, a.c. motors, airplane motors, and from an old Model A Ford truck without muffler, which I have on my place for odd transport jobs.

After listening to such loud 120-cps tones for some time and then going to a quiet place, I can *still* hear intermittently, slowly pulsating, and weakly, this absolutely def-

[Continued on page 39]

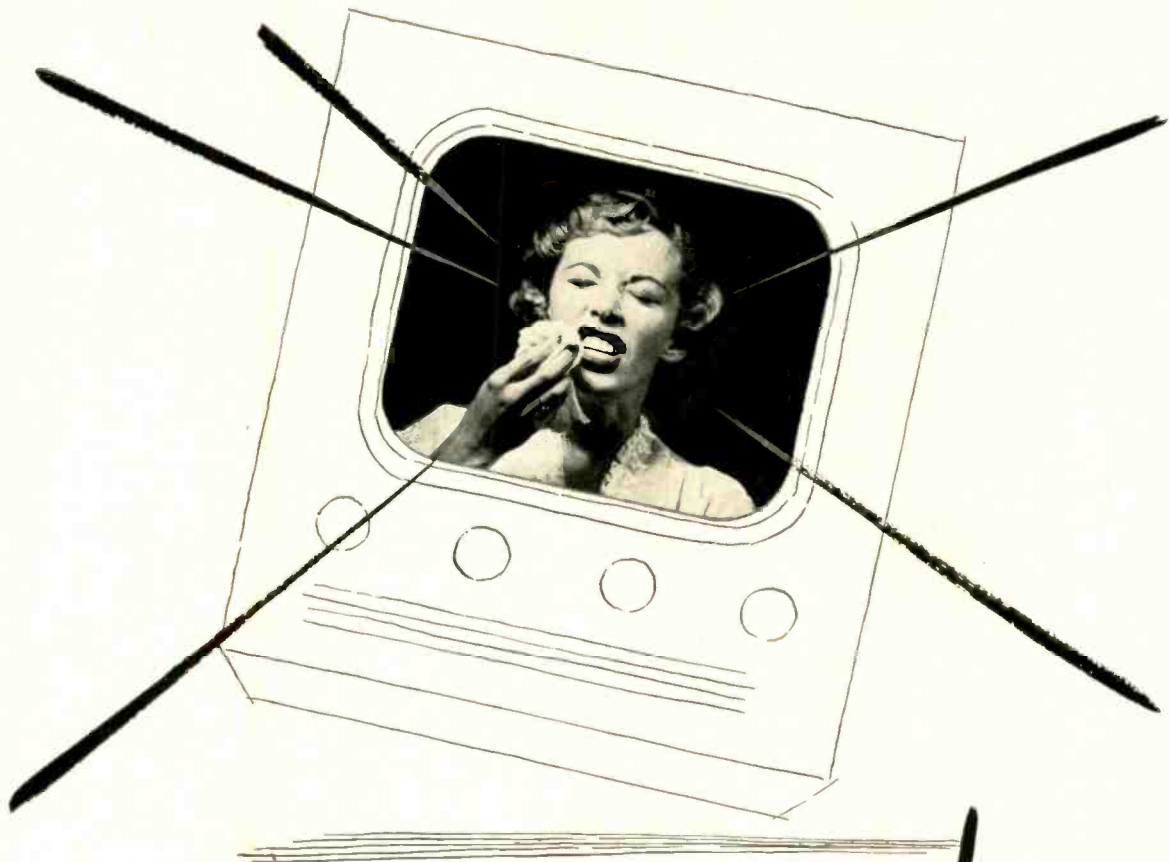

\* @ ⚡ ? X @ !

You've seen this, or something else "unfortunate," on too many live TV shows. It simply couldn't happen if the show were on 16-mm film.




The Maurer — most widely used 16-mm Professional Motion Picture Camera.




**J. A. MAURER, INC.**  
37-03 31st Street, Long Island City 1, N. Y.

**16-mm Professional Production Equipment**

# RCA "PLUG-IN" amplifiers

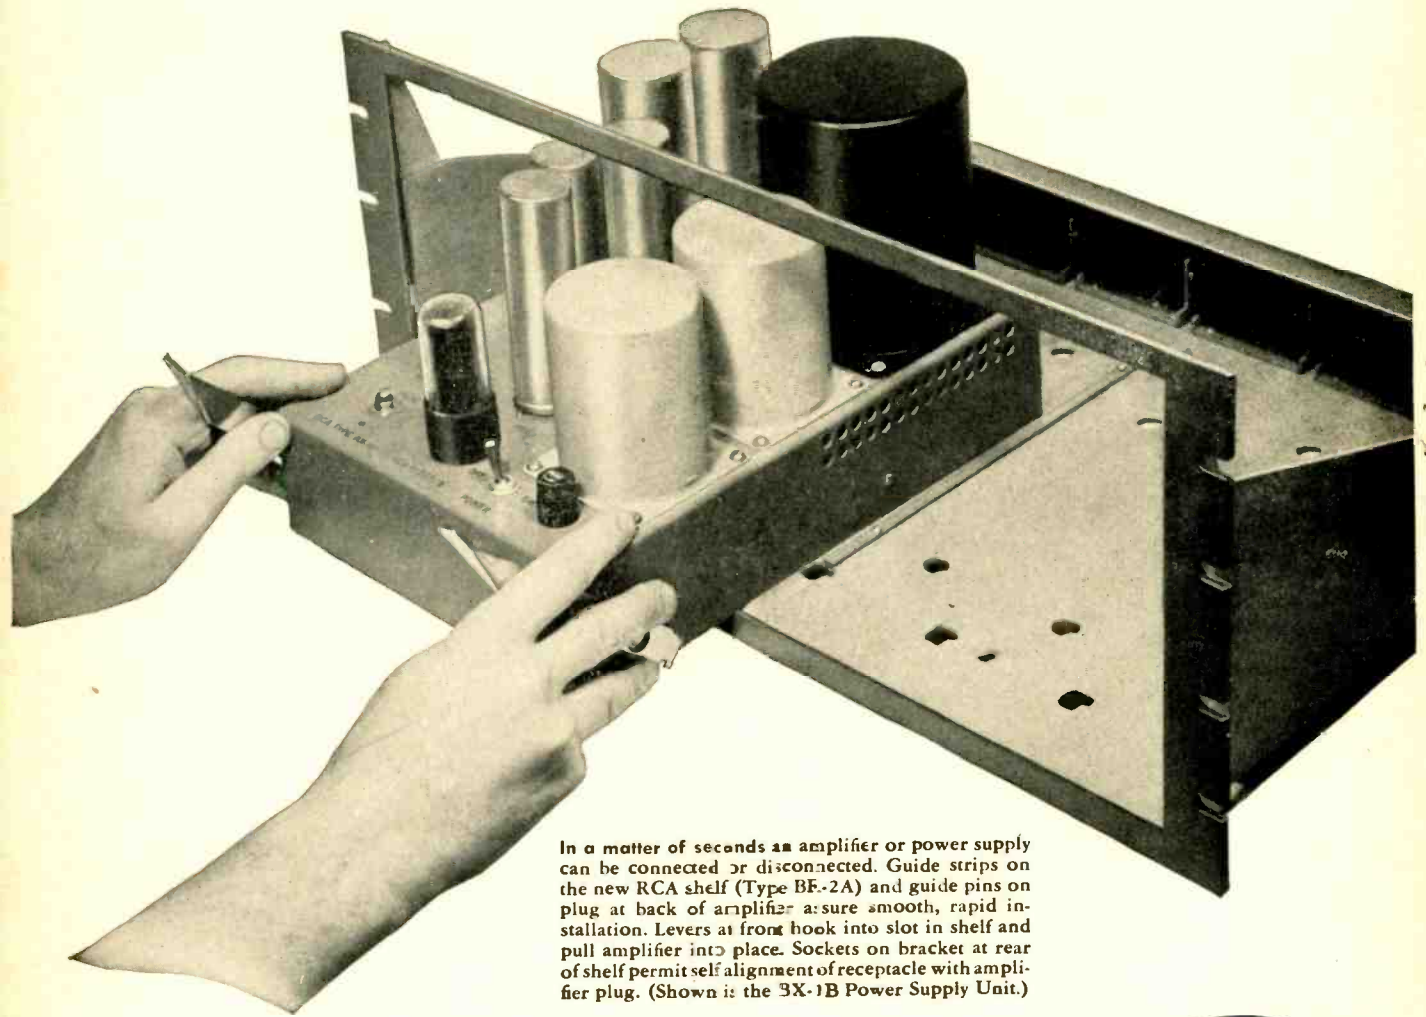

In a matter of seconds an amplifier or power supply can be connected or disconnected. Guide strips on the new RCA shelf (Type BF-2A) and guide pins on plug at back of amplifier assure smooth, rapid installation. Levers at front hook into slot in shelf and pull amplifier into place. Sockets on bracket at rear of shelf permit self-alignment of receptacle with amplifier plug. (Shown is the 3X-1B Power Supply Unit.)

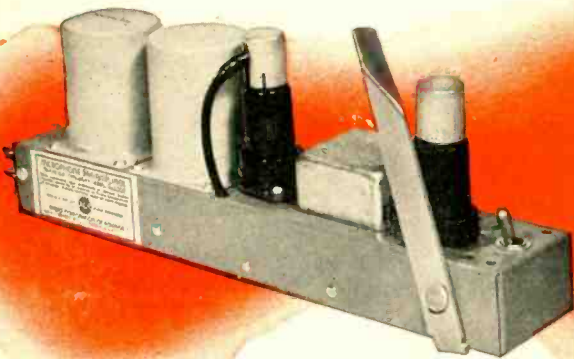

**Two-stage Preamplifier (Type BA-1A)**—ideal for use as a microphone preamplifier, turntable preamplifier, booster amplifier, or low-level isolation amplifier. *High gain:* 40 db. *High output:* +10 db. *Low noise level:* -80 db. *Low distortion:* 0.5% rms, 50 to 7500 cycles. *Isolation factor:* approx. 90 db; over 100 db with special Volume Control Kit. *Frequency response:*  $\pm 1$  db, 30 to 15,000 cycles. *Small size:* six units will fit on a 36-B or new BR-2A shelf!



**Booster Amplifier (Type BA-2C)**—A two-stage unit having applications similar to those for the BA-1A; also valuable where a high-gain amplifier between announce microphone and limiting amplifier is required. *High gain:* 50 db. *Low noise level:* -68 db. *Low distortion:* 0.75% rms, 40 to 15,000 cycles. *Frequency response:*  $\pm 1.5$  db, 30 to 15,000 cycles. *Compact:* two units can be mounted on one 36-B or BR-2A shelf. Features plug-in capacitors and built-in power supply.



# for quick interchanges— and easy maintenance



The RCA Type BR-2A Shelf fits any standard rack; takes 8-3/4 inches of panel space. If desired, however, RCA Type 36-B panels and shelves now in use can be easily adapted for plug-in amplifier service.

## All units available for immediate delivery

AS easy to install or remove as an electronic tube! Pull a lever near the front of the amplifier and the plug on the rear of the unit is smoothly withdrawn from its socket—automatically disconnected from the supply voltage. No longer is it necessary to crawl around to the back of hard-to-get-at racks and unsolder or unscrew countless connections. System changes can be made quickly; minutes can be slashed from inspection, servicing, and testing time.

This new RCA line now includes the four amplifiers and one power-supply unit shown. Others will be added in the near future. New, carefully selected characteristics make these units ideal for a large number of studio jobs.


All units use the same standard plug. To assure maximum convenience, a new shelf (Type BR-2A) has been designed. With a few easy changes, however, the conventional RCA Type 36-B panel and shelf can be used, if desired. The necessary accessories are available for this purpose.

Here, we believe, is a real opportunity to modernize your amplifier system—a quick, convenient way to get better performance at low cost. Descriptive leaflets are yours for the asking. Write: Dept. 7G, Audio Equipment Section, Radio Corporation of America, Camden, N. J.




**BROADCAST EQUIPMENT**  
**RADIO CORPORATION of AMERICA**  
**ENGINEERING PRODUCTS DEPARTMENT, CAMDEN, N. J.**

In Canada: RCA VICTOR Company Limited, Montreal

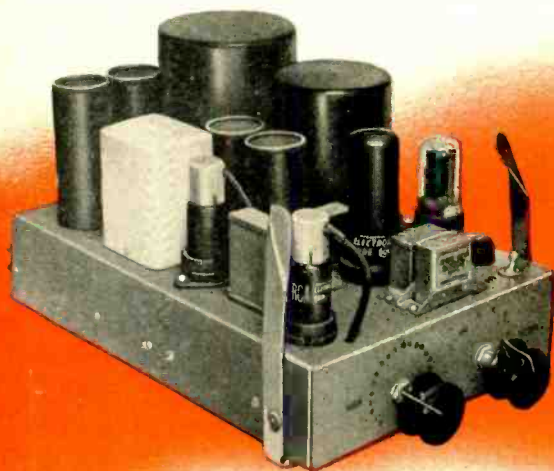

**New Program Amplifier (type BA-13).** The most versatile high-fidelity amplifier ever designed for broadcasting. Ideal as a program or line amplifier, bridging amplifier, isolator amplifier, cueing or monitoring amplifier. Improved layout for greater accessibility; "plug-in" electrolytics for ease in servicing. *Output*, 2 watts (approx.). *Higher gain*, 65 db for matching input; 28 db for bridging input. *Lower noise level*, -82 db (with max. gain). *Lower distortion*, less than 0.5 to 1% rms, depending on output level. *Frequency response*,  $\pm 1$  db, 30 to 15,000 cps.

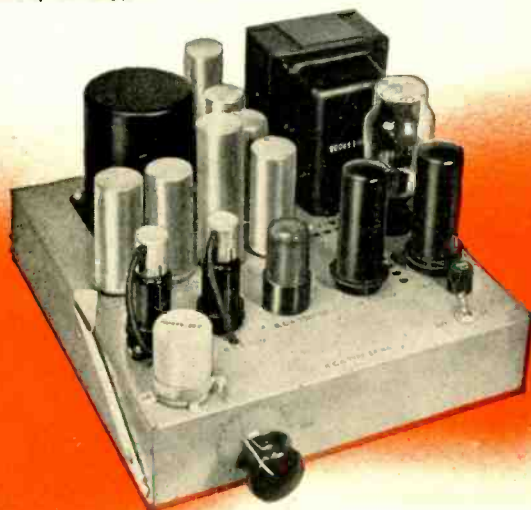

**Monitoring Amplifier (Type BA-4B)**—Designed for operation at microphone levels. High output of 12 watts is sufficient to drive several speakers or, in some applications, a recording head. Other uses include application as line amplifier for portable and mobile transmitters. *High gain*: 105 db. *Low noise level*: -20 db (with maximum gain); -40 db (with minimum gain). *Low distortion*: less than 3% at 12 watts. *Frequency response*:  $\pm 2$  db, 30 to 15,000 cycles.

# EDITOR'S REPORT

## STANDARDIZATION (Cont'd)

**O**N THE SUBJECT of standardization of equipment of various types, there is always much to be said. Transformers have long been in the limelight, and circuit impedances in a complete system—such as a broadcasting plant—are intimately related to transformers, or vice versa.

Departing from the discussion of professional equipment, there is much work to be done with components in the public address and home amplifier field. As an example of this, it will be noted that amplifiers are rated in a variety of ways, usually such that the best possible numerical values are credited to the equipment being described. Consider the rating for hum and noise levels—in the professional class, amplifiers are described as having a noise level of  $n$  db below a reference level, usually 1 mw. In the p. a. line, most equipment is rated as having a noise level of  $n$  db below maximum power output. Obviously, then, an amplifier with an output of twenty watts, corresponding to +43 dbm, will appear to be better under its rating of "80 db below maximum output" than a professional amplifier rated at -65 dbm, although the hum and noise level of the former is actually only -37 dbm. It is not the number of db below maximum output that is of interest, for an amplifier having an output of +50 dbm and a noise level 60 db below this value is not very quiet at all—a noise level of -10 dbm is hardly acceptable for a good quality system.

The maximum noise level from a good amplifier designed for use in a home reproduction system should be no higher than -40 dbm, and preferably as low as -60 dbm, to ensure the extreme of quiet desired by critical listeners. In selecting any amplifier, therefore, it is good policy to translate the published rating to a level referred to some standard, preferably 1 mw, before comparing a number of figures, which unless intelligently considered, mean little.

Going to another question—it is well understood that the gain of an amplifier is based on the ratio of the output power to that delivered to the input. Thus, in a typical amplifier, the input is rated as 5 megohms and a signal of .001 volts from any source is sufficient to drive the amplifier to full output. However, if the same amplifier were rated at an input impedance of 50,000 ohms, the same signal would also drive the amplifier to full output. But—the calculated gain of the amplifier differs by a factor of 100, or a difference of 20 db. Thus, though the actual gain of the amplifier has not changed, the figures denoting this gain have changed appreciably.

The object of this discussion is to point out the fallacies in the methods of rating an amplifier. To make

valid comparisons, it is necessary that all the ratings be translated to the same basis, so that the equipment can be evaluated fairly, and without prejudice to one or the other on account of the method of presenting the facts.

One other component that comes into this discussion is the microphone. In the consideration of various microphones of any type, they too must be compared on an equal footing. It will be noted that some are rated at a given output for a sound pressure of 1 bar, while others are rated for a pressure of 10 bars. This alone will make a difference of 20 db in the actual output, provided the difference in the reference is not observed.

The whole point to standardization is to make it possible to substitute equipment readily without the necessity of making extensive changes in other circuit elements in case a single element must be replaced. There is nothing wrong with the ratings usually published—but to make comparisons that are valid, everybody must be talking about the same thing. It would be helpful if all conditions were standardized. Until then, though, remember that old axiom to which every engineering student has been exposed—read the problem thoroughly before attempting to solve it.

## NEW MICROPHONE DESIGNS

One of the principal troubles encountered in TV sound pickup is the inability of standard microphones to produce acceptable quality at the distances required by camera placement. Thus it appears that a new microphone design may be desirable. With all due respect to presently used microphones, most of which produce excellent sound quality when operated under conditions normal in radio, it is nevertheless a fact that these microphones—almost without exception—are merely modifications of early telephone transmitters. Instead of the microphone being designed to fit the application, the application has usually been modified to fit the requirements of the microphone, and so far it has apparently not been possible to adapt TV techniques to produce consistently good quality with any existing mike.

Perhaps the next move should be a study of present designs to determine the possibility of bringing out a completely new type of microphone which is suited for TV use. Such a design might well incorporate a pattern which is essentially a cone with an included angle of 30 to 45 deg. and with the response at the back and sides at an absolute minimum. Considering the performance of present uni-directional microphones, this should not be too difficult for the design engineers, and it is well agreed that such a microphone is badly needed.

# Magnetic Materials

The Arnold Engineering Company  
offers to the trade a complete line of  
Magnetic Materials



## PERMANENT MAGNET MATERIALS

- Cast Magnets, Alnico I, II, III, IV, V, VI, XII, X-900
  - Sintered Magnets, Alnico II, IV, V, VI, X-900, Remalloy\*
    - Vicalloy\* • Remalloy\* (Comol)
  - Cunico • Cunife • Cast Cobalt Magnet Steel

## HIGH PERMEABILITY MATERIALS

- Deltamax Toroidal Cores • Supermalloy\* Toroidal Cores
  - Powdered Molybdenum Permalloy\* Toroidal Cores • Permendur\*

\*Manufactured under licensing arrangements with WESTERN ELECTRIC COMPANY

*Write for information relating to any of these Magnetic Materials*



## THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

147 EAST ONTARIO STREET, CHICAGO 11, ILLINOIS

Listen for the words "Transcribed by AMPEX" after the great shows in radio

Here's why.....

the new series 300

**AMPEX**

**MAGNETIC TAPE RECORDER  
answers industry need!**



Designed by engineers  
who had your engineering  
needs in mind!



Portable Model

Console Model 300 - \$1573.75\*  
Portable Model 300 - \$1594.41  
Rack Mounted - - \$1491.75

\*Meter panel extra

F. O. B. Factory, San Carlos, Calif.

**\* Original program quality preserved**

Use of independent reproduction facilities allows instantaneous monitoring and makes possible the most stringent comparisons between recordings and originals.

**\* Tape and playback noise non-existent**

Use of special record and bias circuits has eliminated tape noise.\* Extreme care has been exercised to eliminate hum pick-up.

**\* Editing made easy**

With Ampex editing is almost instantaneous. Single letters have been actually cut off the end of words. Scissors and scotch tape are all the tools needed.

**\* You can depend on Ampex**

Read what Frank Marx, Vice President in charge of Engineering, American Broadcasting Company, says: "For the past two years A.B.C. has successfully used magnetic tape for rebroadcast purposes... A.B.C. recorded on AMPEX in Chicago... 17 hours per day. For 2618 hours of playback time, the air time lost was less than 3 minutes: a truly remarkable record."

**SPECIFICATIONS**

**FREQUENCY RESPONSE:**

At 15" ± 2 db. 50-15,000 cycles  
At 7.5" ± 2 db. 50- 7,500 cycles

**\*SIGNAL-TO-NOISE RATIO:** The overall unweighted system noise is 70 db. below tape saturation, and over 60 db. below 3% total harmonic distortion at 400 cycles.

**STARTING TIME:** Instantaneous. (When starting in the Normal Play mode of operation, the tape is up to full speed in less than .1 second.)

**FLUTTER AND WOW:** At 15 inches per second, well under 0.1% r.m.s., measuring all flutter components from 0 to 300 cycles, using a tone of 3000 cycles. At 7.5 inches, under .2%.

Manufactured by Ampex Electric Corporation, San Carlos, Calif.

DISTRIBUTED BY

**CROSBY ENTERPRISES**

9028 Sunset Blvd., Hollywood 46, Calif.

**GRAYBAR ELECTRIC CORP.**

Graybar Building, New York 17, N. Y.

**AUDIO & VIDEO**

Products Corp.

1650 Broadway, New York 19, N. Y.



Fig. 1. Front panel of portable amplifier. Access plate at left end is removed to permit connection of microphone cables.

W. W. DEAN\*

Practical, standard engineering provides a design which features compactness, reliability, flexibility, and performance.

## *New Portable* Audio Amplifier for AM-FM-TV

**T**HE FUNCTION of a portable amplifier is to receive the signals from the microphones at a remote-broadcast location, combine them in the desired proportions, and amplify the resulting signal to a level suitable for transmission to the broadcast studio. Since a.c. power is not available at all locations, portable amplifiers must operate from batteries, or from both a.c. and batteries. The electrical performance must be of broadcast quality, although the specifications of most earlier amplifiers are not as rigid as those on studio equipment. As the unit is frequently carried from studio to a remote location, and from one remote to another, it must be light in weight, easy to carry, and of sturdy construction.

In the design of any piece of portable audio equipment, some compromise must be made between the features of the equipment and the size and weight. One of the main determining factors in this compromise is the type of mixing system used. In low-level mixing, the microphone outputs go directly to the mixer system where they are combined and then amplified. High-level mixing, on the other hand, uses an amplifier between each microphone and the mixer system.

Signal-to-noise ratio in a properly designed amplifier is largely determined

by what happens at the grid of the first stage. A practical average value of noise in an input stage using a modern low-noise tube is in the order of  $-125$  dbm. This noise can be made to consist essentially of tube and circuit hiss, with the hum appreciably lower in level.

Since broadcast microphones have effective output levels in the order of  $-50$  dbm in moderately loud sound fields, the signal-to-noise ratio at the first grid seldom starts out better than 75 db. In weaker sound fields this ratio is correspondingly degraded.

Now assume that a four-channel, low-level mixing system is interposed between the microphone and the first grid. Such a mixer has an initial loss of approximately 10 db and usually is set by the operator to have a loss closer to 20 db. It is seen that such a mixing system generally reduces the signal-to-noise ratio to 55 db.

These figures are based on the use of the very best type low-noise, low-microphonic input tubes. It can be demonstrated that the use of receiving-type tubes, especially certain types of miniature tubes, will raise the noise an additional 10 to 20 db and change its character from smooth hiss to very annoying hum or to microphonic ringing noises.

Therefore, for portable amplifiers using low-level mixing systems and receiving-type input tubes, it is not unusual to measure signal-to-noise ratios

of only 40 or 45 db under standard test conditions approximating a microphone in a moderately loud sound field. Consider what the ratio becomes when the microphone is in a weak sound field. Hardly the background of "dead silence" required by today's new transmitting systems.

When high-level mixing is used, the story is much more attractive since the signal-to-noise ratio seldom goes below that established at the first grid. High-level mixing plus the use of modern low-noise tubes insures the lowest possible noise level at all times.

Consider the output of the microphone in our moderately strong sound field to be  $-50$  dbm. In a high-level mixing system it is first given a boost of 40 db in a low-noise pre-amplifier stage. Then the signal drops, say 20 db, in the mixer. It is still 20 db above microphone level when it is applied to the tube following the mixer. By making the booster stage design the same as that of a low-noise pre-amplifier, the mixer settings can be increased to give a 40-db loss before the signal-to-noise ratio has been reduced below that prevailing at the first grid.

High-level mixing gives other advantages. Since input transformers are used ahead of each tube, the microphone lines may be operated balanced to ground. This gives a noise reducing advantage where the cables are quite long and must run through interference

\*General Electric Co., Syracuse, N. Y.



fields. Also, the use of input transformers permits tap changing to match various source impedances.

#### A. C. and Battery Power Supply

Portable amplifiers which operate from both a.c. and batteries may be divided into two general classifications: (1) Those which have the batteries in a separate case, and (2) Those which have the batteries included in the same case with the amplifier. The advantages of a.c. and battery power in the amplifier case, rather than in a second container, are many. It is safe to assume that most pickup locations have reasonably reliable a.c. power available. However, this power has been known to fail, and in such cases, the inclusion of batteries in the amplifier case where they are *always* available is a great asset.

Because of the additional space and battery power required by the pre-amplifiers of a high-level mixing type of remote amplifier, it is not feasible to include an extended-life complement of batteries in the single-case design. However, lightweight, emergency batteries may be included. In the event of a.c. power failure these would be expected to operate only until the end of the program.

To make this single unit design practical, it was necessary to reduce the power drain to a minimum. In fact, miniature tubes were used throughout the entire amplifier during the early stages of the design because of the reduced heater drain (150 ma for the miniature 9001 tube as compared to 300 ma for the octal base 1620). Type 9001 tubes were employed in the pre-amplifiers and also in the booster and driver stages since this tube makes a very effective high-gain pentode stage, and can also be used as a triode where desired. A 6AK6 tube was used in the output stage and a 6X4 tube as a rectifier. Unfortunately, the hum and microphonics resulting from the 9001 tubes in the pre-amplifier and booster stages were intolerable and these tubes had to be replaced by 1620's, which are especially designed for low-level audio applications. The 9001 was retained in the driver stage, as this stage operates at a level sufficiently high that overall performance is not degraded by the tube. The 6AK6 was chosen since it is the only available tube with a 150 ma. heater which would deliver the required +18 dbm output through a pad of adequate size. The drain on the "B" supply is small enough so that it presents less of a problem.

In addition to the partial use of low-heater-drain miniature tubes, the "A" battery life was further increased by opening the heaters of tubes not in use. Many remote broadcasts use only one or two microphones; therefore the pow-

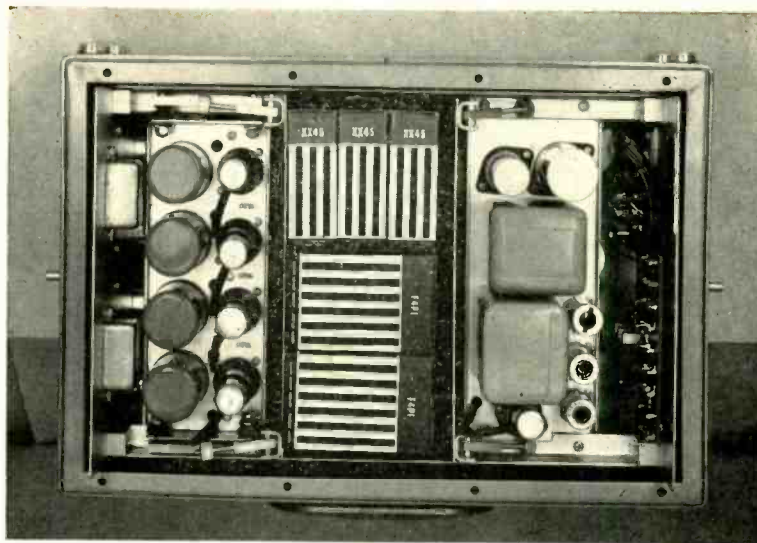


Fig. 2. Portable amplifier with rear cover and battery cover removed.

er switch was wired to disconnect the heaters of the pre-amplifier tubes not in use. This switch has five operating positions in addition to the OFF position. The first position permits a.c. operation with all tubes connected, the next four positions are for battery operation with either four, three, two or one pre-amplifier heater connected.

When the amplifier is operating from its a.c. supply and a power failure occurs, the VU meter pilot lamps and a neon a.c. indicator lamp will go out. The operator then has approximately two seconds in which he can turn the power switch to one of the battery positions without noticeable loss of program level or quality. In the event that a.c. power is restored before the end of the program, the operator is notified by the a.c. indicator lamp and he may then turn the power switch back to the AC position after allowing time for the rectifier cathode to heat. The power changes are not noticeable on the air.

To eliminate the possibility of the internal batteries running down due to the operator forgetting to turn off the amplifier at the conclusion of a broadcast, the batteries are interlocked with the a. c. power cord. This cord must be plugged into the amplifier for the internal batteries to be operative and must be removed to close the case for transit. The power receptacle is also arranged so that external batteries may be used when desired.

#### Test Tone

A unique feature of the amplifier is the inclusion of a 400-cycle test oscillator for adjusting operating levels. The oscillator is of the relaxation type and employs a 1/25 watt neon-lamp which also serves as a low-drain d.c. pilot lamp

when it is not used for adjusting levels. This oscillator provides a direct method for adjusting the level to the control room, eliminates the necessity of setting up a separate microphone near the amplifier, "woofing" the sound peaks and watching the VU meter. Test-tone is also a help where the set up and level check must be made under conditions where "woofing" into a microphone is not desirable. This sometimes happens during a nightclub floor show where quiet is demanded, or in a church where the set-up must be made during part of a service.

#### Monitoring Circuits and P. A. Feed

In the use of many portable amplifiers, it has been found that sufficient volume has not been provided for headphone monitoring in noisy locations, so two jacks are provided for the phones. The low-level jack is connected across half of an isolated secondary winding and operates at line level which is normally satisfactory for headphone monitoring. The high-level jack is connected across the full winding and allows the operator to monitor at a 6 db higher level, which helps to overcome extremely high background noise.

A third monitoring jack, for two-way talkback to the control room, is connected directly across the line terminals on the line side of the output pad. When the headphones are plugged into this jack, the operator can communicate with and receive program cue from the control room preparatory to going on the air.

The monitoring winding is also connected to a pad which furnishes microphone-level output to a 50-ohm balanced load. The connection is very useful for feeding public address system inputs

or other portable amplifier. In the latter case seven input channels, with sub-master control over four of the channels, may be provided by connecting the MIKE LEVEL OUTPUT of one G-E portable amplifier to one of the inputs of a second portable amplifier.

A full-size illuminated VU meter is provided for convenience of operation. A dimmer control and switch are used to dim the pilot lamps or turn them completely off if it is desired to decrease the drain on the batteries. In addition to two volume-indicating range positions on the VU meter selector switch, there are positions for checking the two "A" batteries and the "B" batteries. This makes it possible to check the condition of the batteries without the necessity of using external meters. The normal operating position of the VU meter selector switch is the +8 VU position corresponding to normal line level. A +14 VU position is also included so that the telephone lines can be fed at a higher level in case of an emergency condition where it may be necessary to override high line noise. Although the amplifier is rated at +18 dbm (+8 VU with a 10 db peak factor), listening tests have demonstrated that quality was acceptable at +14 VU even with reduced battery voltages.

#### 6-DB Output Pad

The output of any amplifier which is intended to feed a telephone line should first go through an isolation pad. Such a pad performs the following functions:

1. Provides an essentially resistive load for the telephone line by minimizing the effects of varying amplifier internal impedance.

2. Provides an essentially resistive load for the amplifier and VU meter by minimizing the effects of varying telephone-line impedance.

The reason for the pad, then, is to minimize the effects of impedance variations in amplifier and line. It follows that the larger the attenuation of the pad the less will be the effect of varying impedances. Use of an adequate loss pad will permit better line equalization, give more accurate VU meter readings and permit the amplifier to function at peak efficiency.

Examination of curves showing the reduction of impedance variations versus pad loss indicated that at least 6 db must be used for high-quality performance. More than 6 db loss would require an excessively large output stage. A loss of 6 db in the isolation pads was therefore indicated.

Either 600- or 150-ohm output transformer connections and isolation pads may be used. Selection is by means of a screwdriver-operated switch. 600 ohms is standard for use on 600-ohm equalized circuits. 150 ohms is used on relatively short, unequalized circuits where the low sending impedance provides a degree of equalization which tends to compensate for the transmission characteristics of the line.

#### Construction

The Type BA-6-A Portable Amplifier is housed in a lightweight aluminum alloy case 12 inches high by 17 $\frac{1}{8}$  inches long, and 8 $\frac{3}{4}$  inches deep. It weighs approximately 35 pounds, including the weight of the emergency batteries. When operated without internal batteries it weighs approximately 30 lbs. A neat appearance is presented by the

grey baked-enamel finish of the case proper and the contrasting blue vinyl plastic-coated fabric applied to both front and rear covers.

Removal of the front cover gives access to the panel, Fig. 1, on which all of the operating controls are located. The center section of the panel is finished in blue. The remainder of the panel is finished in satin aluminum. Above each mixer control is a write-in space in which notes may be pencilled and erased. Provision is made to store the a.c. power cord within the front cover.

Removal of the rear cover provides access to the tubes, transformers, and the battery compartment, Fig. 2. The batteries are clamped in place by a cover which is easily released by means of four thumb nuts. Spare tubes and fuses are clamped to the inside of the rear cover.

Flush-mounted, snap-in access plates are provided on the sides of the case for access to the input and output connectors of the amplifier. The four input receptacles are mounted on the left side, while the power, line output, and mike level output receptacles, the line output terminals, monitoring jacks, and the output-impedance selector switch are all located on the right side. The access plates are attached to the amplifier by small head chains.

#### Audio Circuits

The schematic, Fig. 3, shows that the unit consists of four pre-amplifiers, a mixer system, and a program amplifier with booster, driver and output stages. The master gain control precedes the driver stage.


The pre-amplifiers use type 1620 low-noise, low-microphonic tubes, pentode-connected for maximum gain. Inverse feedback is used in these amplifiers to reduce distortion at high input levels. The taps on the input transformers may be adjusted so that the amplifier will operate from 30, 150, 250, or 600 ohms depending upon the type of microphone used. To further reduce microphonic and shock disturbances, the pre-amplifier assembly is cushioned with soft rubber shock mountings.

The four pre-amplifiers feed directly into a high-impedance mixing system which eliminates the need for all transformers between pre-amplifier and program amplifier. The impedance ratio of the ladder network attenuators is 1:2 for minimum loss. High-quality, step-type attenuators are used throughout for smooth, noise-free operation and long life.

Another 1620 is used in the booster stage, as it may operate at a level only slightly higher than microphone level for extreme settings of the gain con-

[Continued on page 39]

Fig. 4: Measured performance characteristics of portable amplifier.

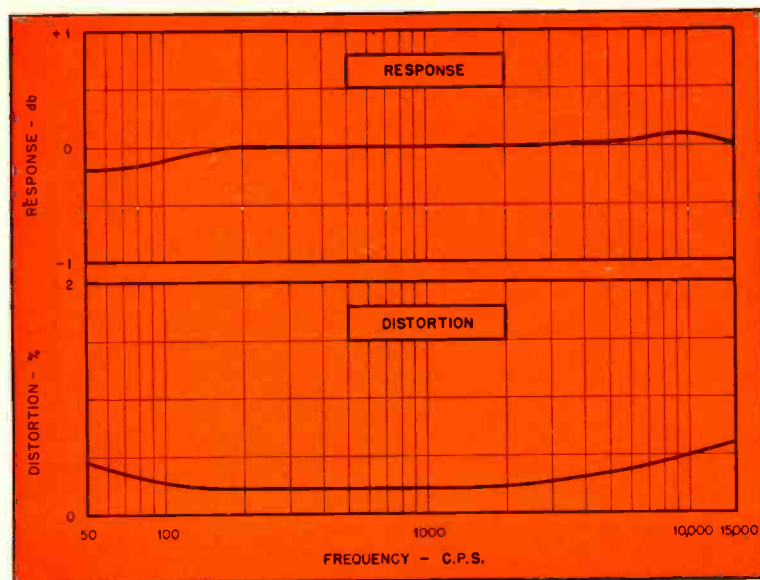



# Auditory Component Control for The Legitimate Theatre

JOHN H. BEAUMONT\*

Sound for the theatre is rapidly coming into prominence, and the author summarizes the principal requirements which differ widely from broadcast and recording practice.

**T**HE PURPOSE of this article is to outline some of the requirements for integrated systems for the control of the auditory component of theatrical production, and to indicate a line of approach to their design. Theatrical controls are a specialized application of audio equipment; mere grouping of commercially available units does not constitute an adequate control system, nor should control systems designed for other audio applications be transferred to a theatrical application without modification. The problems of the operator in the theatre are to some extent unique, as will be seen, and the demands made on his equipment more complex than those encountered elsewhere.

While there seems to have been little incentive for the development of this type of control in the past, the initiation of highly flexible electronic lighting controls, as well as a growing recognition of the importance of the auditory component of production, indicate a need for the design and further development of flexible control facilities for the legitimate theatre.

There is a general agreement among those who have worked on auditory component control that the scope of this control should include the following elements:

1. Control of the intensity of all sound sources (loudspeakers).
2. Control of the apparent movement of sound sources on the stage and in the auditorium.
3. Controlled reinforcement of speech and other sounds originating on stage.
4. Controlled dubbing of voices or other sounds onto actors, props, or scenery.
5. Control of the audio spectrum for dramatic effect.
6. Control of the apparent reverberation of the space in which sounds are heard.

In terms of control equipment these require a system capable of controlling the gain, frequency response, reverberant quality and distribution of one or more signals. Control should be in the hands of a single operator, placed where he can see the stage and hear the sound he is controlling exactly as the audience

is hearing it. This indicates a type of control which is complete, compact, easy to operate, and capable of being remotod from the bulk of its associated amplification units. Development up to this time has followed broadcast practice in many respects. Input devices have usually been associated with an input amplifier; control has been applied at line level and the resulting signal given further amplification before distribution.

#### Advantage of Remote Control


In theatrical control equipment, it has generally been the custom to control the signal directly. When the control console is remotod from the amplification facility, as is often the case, signals must be carried through relatively long

mechanical controls on the basis of simplicity. Non-signal controls, whether the control intelligence be a.c. or d.c., releases the remote console from practical considerations of line length, and renders the control cable installation non-critical in terms of hum pickup and frequency losses.

Usually a single input source is associated with a single input amplifier (no switching being done at this point), and a single loudspeaker unit with a single output amplifier. While it is not generally necessary to shift a speaker from one amplifier to another during a show, this control should be available in case of amplifier failure. Control systems should be designed to allow insertion of the number of units which

Fig. 1. Vertical type mixer attenuator manufactured by Tech Laboratories.

Photo by Bullock

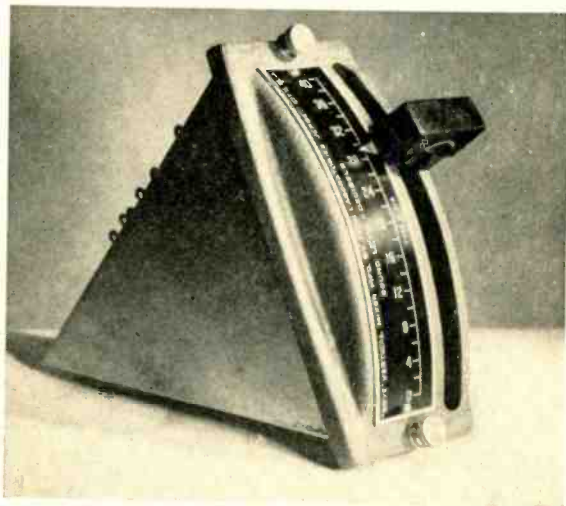

lines to and from the control position, and other elements of control added to the signal at this point. Neither of these limitations are particularly satisfactory and this author prefers, as a design axiom, that the audio signal should not leave the amplifier facility between the input amplifier and the speaker distribution point. This requires the use of non-signal controls. There are several possible approaches to such control; electronic means being preferable to

will be needed for a given operation so that the above associations may be used. Use of frameworks or banks bussed for the largest expected installation not only provides this flexibility for portable equipment but allows a fixed installation to be increased in capacity as needs and budgets dictate.

#### Flexibility

Flexibility is usually provided by the use of a number of signal busses between input and output amplifiers. The

\*Vice President, Audio Facilities Corp.

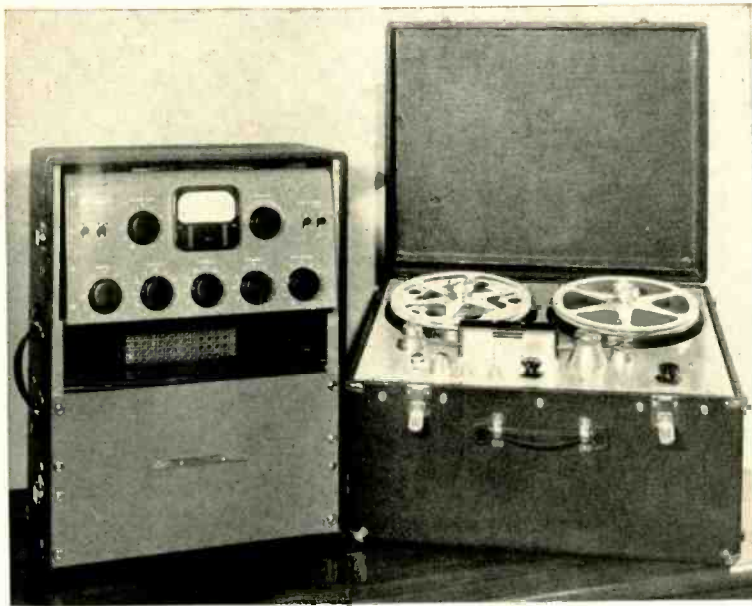


Fig. 2. High quality tape recorder which may be used on location recording, as well as for reproducing previously recorded tracks in the theatre.

Courtesy Ampex Electric Corporation

amplifiers are bridged onto these as desired, providing a number of separate channels which may be controlled independently. Control may be inserted in these busses or bridged onto them with the amplifiers, depending upon the control solution. The number of busses is indeterminate, though three has been considered an optimum. Further flexibility is generally provided in the form of speaker distribution switching, for reasons mentioned previously. When other distributions or divisions of equipment are desired, such as disposition of amplifier elements between two or more control units, they may be accomplished by the use of patching panels at the amplifier facility. Patching should be used only where it will not be changed during an operating setup.

It has seemed desirable to provide level control for both input and output amplifiers, providing, in effect, a dual control in any complete signal path. This is necessary because the general case will be a single input source operating into a number of output amplifiers whose controls will be needed to provide control of the sound distribution. Master gain control should be added in the busses when the total number of input or output controls is too great to be handled at the same time by one operator.

Trends in control element design are indicated by Fig. 1, which shows a type of vertical acting gain control which has been used for theatrical purposes. Vertical action finds favor with operators because of ease of operation, readability during operation, and the possibility of operating several adjacent

controls with one hand. Commercially available units are still too large for effective spacing, and the best solution is a fabricated unit not more than an inch in width overall. Rotary controls are definitely unsatisfactory for theatre systems and should never be specified where settings must be made from cue sheets or where more than one control must be operated at a time.

#### Input Signal Sources

Operating experience leaves little doubt that tape reproducers are the most satisfactory input devices for theatrical use. Units such as the one shown in Fig. 2 provide a convenient, quickly cued, high-quality input source. Recording is a relatively simple process, and tapes may be edited for minimum operating complexity. Most, or all of the re-



Fig. 3. Transcription turntable suitable for theatrical use.

Courtesy Gray Research & Development Co.

quired sound for a show may be collected on a single track, edited for sequential playback, and run with a minimum possibility of error.

Turntables will be needed in a comprehensive control setup in addition to tape inputs. These should be 16" transcription type tables with a cuing device such as that offered on the turntable of Fig. 3. Special effects may be produced with variable speed turntables, though such effects should normally be recorded on tape rather than being produced on the spot.

Other input sources will include special tone generators, effect devices, voice synthesizers, and so on. They need not be mentioned here, though Fig. 4 illustrates a device used for the electronic production of rumbles and thunder. This device consists of the driving unit from a Farrand inductor speaker with a taut square of wire screening attached in place of the cone. It is essentially a crude form of contact microphone which produces excellent rumbles when the screen is stroked with the fingers.

There are a number of opinions about the best speaker and baffle for use in any application. Infinite baffles with high-quality cone radiators seem currently to be gaining favor over conventional reflex types because of better damping and absence of peaks in the response characteristic. In theatrical applications, where loudspeakers are often driven at extremely high levels, any housing which allows excessive cone excursions at the low frequencies is inadvisable. For this reason it is felt that the best enclosure for theatre use is a heavily constructed infinite baffle using a good cone radiator. When extended high-frequency response is desired, horns and crossover networks should be added. Enclosures should be constructed of heavy plywood and fitted with connectors capable of withstanding the rough handling they will receive. They should be fitted with flying rings for theatre use, and may have carrying handles and casters. These will be sources of rattle unless provision is made to dampen them.

With the development of high-efficiency radiators the need for high output power is being diminished. The Western Electric 728B offers an acoustic level of 93.5 db at thirty feet on the axis for a power input of 30 watts, while the 754A of the same manufacture offers a level of 94 db at the same distance for a power input of 15 watts. The frequency range of the two is substantially the same, and it would seem logical to use the lesser power in order to reduce bulk and weight in the equipment.

#### Equalization

Equalization networks must be cap-

able of relatively complete and flexible control over the audio spectrum. The type most used in the theatrical work is the well known cut and boost control for the ends of the spectrum, and one should be available to every input device in a control system. In addition, a set of band-pass filters offering spectrum control over at least three bands should be available for control at the signal busses.

All equalizers should have continuously variable controls. Switching types may cause noise if used during an effect, and there is a psychological advantage to the operator in having continuous control even though it is not likely that increments smaller than those provided by switching systems will be needed.

#### Level Indicators

While the VU meter seems to be of little technical value in theatre control systems since there is no relation between its indication and the sound level

control systems it should be optional, under the control of the operator.

In many cases the controls mentioned may be used in a recording setup, thus simplifying the nature of the playback operation considerably. When tape is used all possible control should be applied to it during the recording process for this reason. It is probable that most theatre installations will make use of the same equipment for both recording and playback operations, so the controls must be considered part of the system.

Control consoles should be operated from the auditorium to provide the operator with maximum visibility and audibility. In the ideal case the ear should be situated in the same location as the audience ear, surrounded by no enclosure. This is seldom possible, but all compromise positions should attempt as far as possible to allow the ear of the operator to share the auditory experience of the audience. Enclosures should be no larger than needed for conceal-

Dependability and ease of maintenance are universal requirements for electronic apparatus. Theatrical systems must be designed according to the best current practice for easy and rapid maintenance and replacement of units.

#### Preset Controls

No attempt, so far as this author knows, has yet been made to apply preset control to theatrical sound equipment. Preset devices have been used in stage lighting controls, and the most recent of these instruments has proved to be an important advance in the capabilities of that control. The application to sound control apparatus would be valuable in that it would further reduce operational complexity and the possibility of operational error. All functions of control described can be subjected to preset operation.


Summarizing the main requirements for effective auditory component control, we find that the following are desirable:

1. Maximum flexibility of control; all elements controlled from a single operating position.
2. Control console removed from equipment facility; operator in position of good visibility and audibility.
3. Uninterrupted signal path from input device to output distribution; no signal leaves equipment facility for control purposes.
4. Ease of operation; preset control.
5. Dependability and ease of maintenance.
6. Unitized construction, and standardization of units.
7. Reduction of bulk and weight to a practical minimum.
7. Assured high fidelity.

No theatrical control system up to the present time has offered all these features. While dependable, high control systems are in existence, they are not yet completely engineered in terms of the above discussion. The legitimate theatre needs this extension of its facilities for the control of production elements.

Fig. 4. Electronic thunder - screen mechanism.

Photo by Bullock

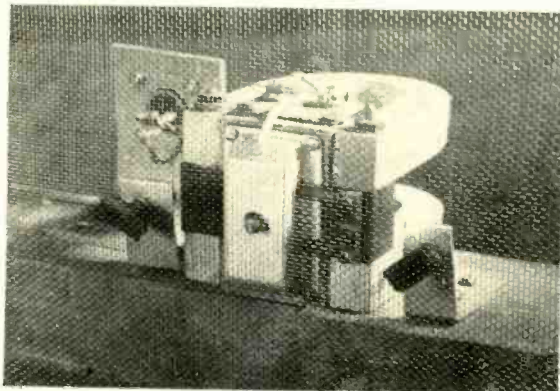

in the auditorium, it is the standard and most economical means of indicating the signal level in the system. Meters are usually bridged onto the signal busses, where they provide a visual signal reference, and may be used as a means of monitoring. For cue setting, meter indications are inferior to an aural monitor, which may include a hearing aid type earphone.


Systems must be so designed that they cannot overload on the largest expected input modulation with all controls full open. This should be done without recourse to level limiting amplifiers or compression circuits. The use of output amplifiers having an adequate peak power capacity will aid in this, as well as providing an adequate dynamic range without the use of expansion circuits. Such circuits are to be avoided because of the resulting circuit complexity and possibility of distortion.

Discussions regarding the use of loudness control tend to the conclusion that if this feature is to be used in theatrical

ment, and should be located as near as possible to the optimum acoustic position in the auditorium. Enclosed booths using a secondary monitor for the sound are no better than a backstage position so far as the operator's ear is concerned.

Fig. 5. Example of inadequate theatre sound system, which is simply a makeshift assembled with p-a system techniques.

Photo by Bullock

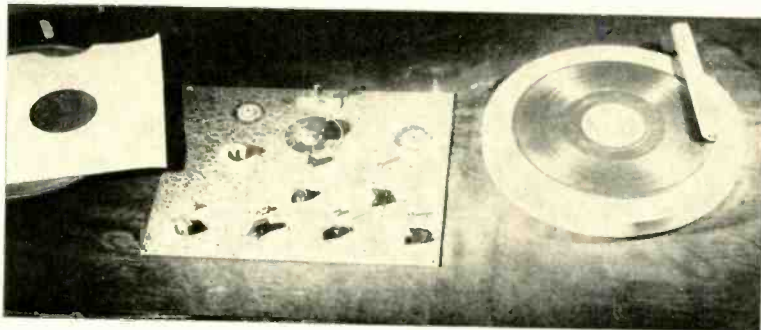

# Importance of Groove Fit in Lateral Recordings

D. R. ANDREWS\*

Relating frequency response to groove fit in practical discussion.

**T**HE process of reproducing disk recordings is done primarily with a mechanical system. The power to actuate the transducer is derived from the force developed between the stylus tip and the sidewalls of the record groove. It is obvious that good contact must be maintained between stylus and groove sidewalls for faithful reproduction. With the introduction of permanent styli, soft thermoplastic record materials, and fine-groove recording, this contact becomes even more important.

Some means of determining the amount and position of contact between stylus and groove is of fundamental importance to the development or design engineer, and:

1. Measurements of frequency response may furnish clues to groove fit if properly interpreted.
2. Another valuable source of information is a proper analysis of intermodulation distortion measurements.<sup>1</sup>
3. A third method, and one simpler to interpret, is simply to compare visually the size and shape of both stylus and groove.

<sup>1</sup> A general discussion of this subject entitled "Intermodulation Distortion Analysis as Applied to Disk Recording and Reproduc-

\*Sound Engineering Section, RCA Victor Division, Camden, N. J.

ing Equipment" by H. E. Roys was published in *Proc. I.R.E.*, October, 1947.

## Resonance and Damping

As stated in the introduction, a phonograph reproducer is essentially a mechanical device. Regardless of the type of electrical or acoustical generator employed, its primary system must be associated with all the advantages and disadvantages of a mechanical system. It is well to remember that a mechanical system usually has a very high "Q". Unless proper damping is employed, resonant conditions may be present.

The mass of the moving system, in conjunction with its centering spring and the compliance of the record material, resonates at some high frequency. Since the stiffness of the record material is usually many times that of the centering spring, this stiffness becomes an important factor in establishing the frequency of the resonance point. This frequency is usually kept near or above the upper limit of the usable frequency range. The mass of the entire reproducer and tone arm in conjunction with the compliance of the centering spring resonates at some low frequency. This is generally known as "tone arm resonance". In considering either of these

resonant conditions, especially the one occurring at the high frequency, the stiffness and yield of the record material cannot be disregarded. The term "yield" is applied to any pliable material which changes position with time. This is the property of a material which provides good damping qualities. It does not necessarily imply that the material takes a permanent set in the changed position. When the material takes a permanent set in the changed position, it is known as "cold flow."

The driving force which operates the reproducer is transmitted from the record material to the stylus tip through a linkage formed by the contact between the stylus tip and the sidewalls of the record groove. It is obvious that any variation in the amount of contact area will change the effective stiffness and damping of this linkage, and consequently the stiffness and damping of the entire system. The record material, especially if it is a vinyl compound or some soft thermoplastic substance, has considerable compliance. Changes in vertical force on the reproducer will therefore change the amount of contact area between the stylus and record material due to compliance and yield. The contact area will vary even more with changes in vertical force when using fine groove records due to the small radius of the stylus tip. With a smaller tip, the unit pressure between stylus and record is increased. Differences in size and shape of the stylus and record groove can also vary the contact area. The effect of these differences on frequency response may be quite interesting.

## Typical Groove Fit Examples

Figure 1 shows a sketch of the fit between stylus and groove when using various sizes of styli. Under ideal conditions the stylus is pinched firmly between the sidewalls of the groove. The stylus tip should also be well off the bottom of the groove. If the stylus touches the bottom of the groove, the sidewalls do not have complete control of the stylus, and if the stylus contacts the groove too near the top, the irregularities of the surface may introduce

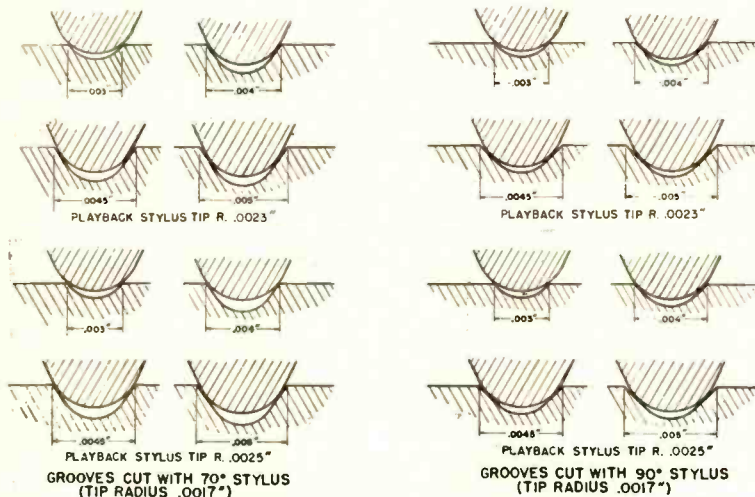


Fig. 1. Groove fit for various radii of the reproducing stylus when superimposed on different groove shapes.

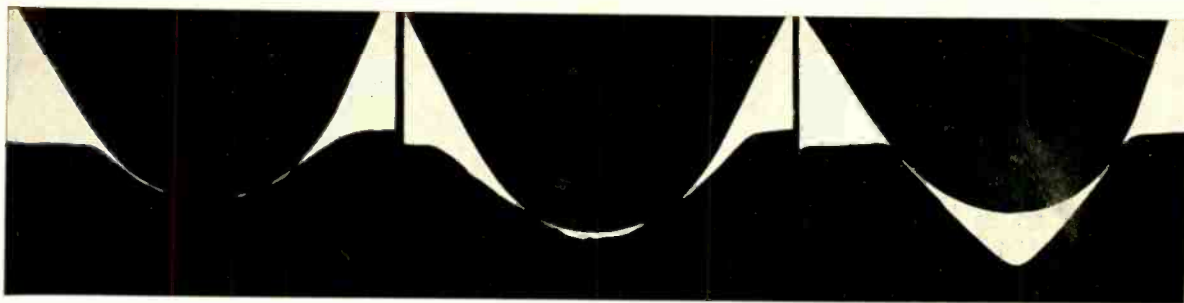


Fig. 2. Shadowgraph of stylus riding on bottom of groove, resulting in curve (A) of Fig. 3. Fig. 4. More nearly ideal groove fit, with curve (B) of Fig. 3. Fig. 5. Groove fit resulting from use of stylus too large for the groove being reproduced. Response curve (C).

noise. Figure 2 shows a photograph of an actual stylus and groove illustrating poor groove fit with the stylus touching the bottom of the groove. This photograph was made from a frequency test record with the aid of a shadowgraph projector. The record was first shattered. A section was then selected with a broken edge perpendicular to the record grooves. This section was placed on the projector so that the surface of the record was tilted approximately 20 deg. from a plane through the center of the light beam. The film on which the shadow was projected was tilted approximately 20 deg. from a plane perpendicular to the center of the light beam. This was done so as to correct partly for the error in the included angle of the record groove caused by the angle of the record material in the light beam. This correction method is not mathematically correct due to the keystone effect on the film, but its simplicity seems to justify its use since the error is negligible for all practical purposes. The stylus was also projected onto a film by means of the shadowgraph projector using the same magnification factor. The two films were then superimposed making a composite picture such as that of Fig. 2.

The frequency record used for making the photograph in Fig. 2 was reproduced with a standard model transcription reproducer before shattering. The upper trace in Fig. 3 shows the frequency response obtained from this test record. There is a noticeable peak in the curve near 8500 cps. This peak is probably due to the mechanical resonance described above. Since there is very poor contact between stylus and sidewalls, as evidenced by Fig. 2, very little damping is supplied to the mechanical system from the record material.

A second frequency record was shattered and shadowgraphed in the same manner. Fig. 4 shows a photograph of this record. The stylus does not touch the bottom of the groove but is very near. The groove fit is not ideal but is a considerable improvement over that

shown in Fig. 2. The center curve on Fig. 3 shows the frequency response obtained with this test record. The sharp resonant peak of the top curve has now been reduced to a mere hump.

A third frequency record is shown in Fig. 5. This photograph shows that the stylus will be pinched tightly between the sidewalls of the record groove. This is not an ideal groove fit because the sidewalls are contacted so near to the record surface that noise may be introduced. The bottom curve on Fig. 3 shows the frequency response obtained from this test record. The resonant peak has now been nearly entirely eliminated with damping.

By careful observation of Fig. 3, it may be seen that as the groove fit is improved the frequency of the resonant peak is increased. This indicates that the stiffness of the mechanical system has also been increased.

#### Summary

The layman will undoubtedly question the need for such painstaking care. Even many technical people do not realize the fact that standardization has not been followed in the choice of stylus size by all concerned. Many different radii have been used for the tips of recording styli. Also different depths

of record grooves have been used. At the present time, it looks as if this condition will be relieved somewhat. The National Association of Broadcasters has appointed a committee for the purpose of setting up standards for disk recording. This committee has now offered proposals for establishing groove size used on transcriptions. The Radio Manufacturers Association also has a committee working on standards for use with home phonograph records. The R.M.A. committee has proposed limits of 2.5 to 3.2 mils as the radius for reproducing styli to be used with this type of recordings.

The new fine-groove records are cut with a 0.5-mil or smaller stylus and should be played back with a stylus having a tip radius of 1.0 mil. At present, the size of this playback tip is generally accepted by all those concerned with fine-groove records. It is hoped and it seems entirely possible that eventually all disk recordings will be cut with fine grooves and one standard will be established for all classes of records.

In conclusion, if consistency of results and high quality is expected, the factor introduced by the size and shape of reproducing stylus and groove cannot be disregarded.

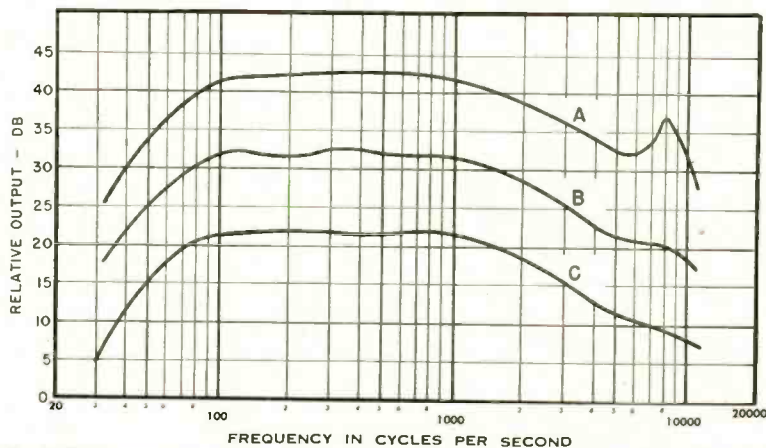


Fig. 3. Frequency response curves made from the same record with three different stylus radii.



Deafness is the condition that exists when a listener does not perceive sounds of normal character and intensity but has a threshold of hearing which is considerably above the normal, or when a listener is unable to understand speech at normal levels. Persons who have difficulty in the perception of normal speech and music are assumed to be deaf, but there are many people who are partially deaf and, although their personal efficiency and possibly their social adequacy has been impaired, they are not aware of the condition. To determine qualitatively whether one is deaf it is necessary to measure his threshold of hearing, and his scores for articulation or intelligibility tests.

There are three common types of deafness: nerve, conduction, and central deafness. In nerve deafness, some of the sensory cells or nerve fibres of the inner ear may degenerate, and a loss of hearing in the frequency region associated with those nerve or cell tissues will result. In conduction deafness, however, the nerve cells are intact but there is some obstruction in the acoustical path which reduces the intensity of the signal as it passes through the outer and middle ear. This can result, for example, when wax blocks the ear canal or gets on the ear drum, or in otosclerosis when a bony material forms about the ossicles and inhibits their motion. In central deafness the nerves and path to the inner ear may function

Fig. 3. Two cases of conduction deafness. Subject of (A) did not require an aid, while subject of (B) did.


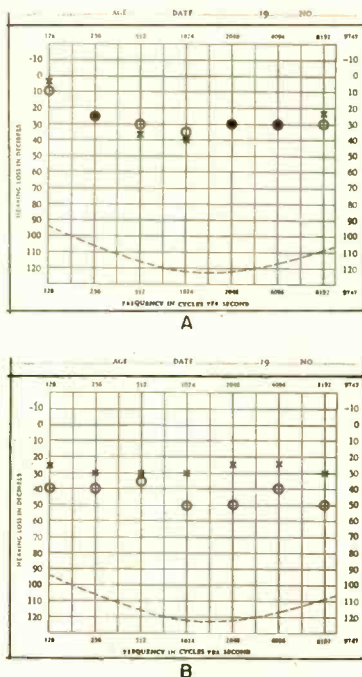


Fig. 4. Results of hearing tests conducted at 1939 - 1940 World's Fair. Hearing loss vs frequency is plotted for various age groups. (After Steinberg, Montgomery and Gardner; courtesy J. Acous. Soc. Am. and Bell Telephone Laboratories)

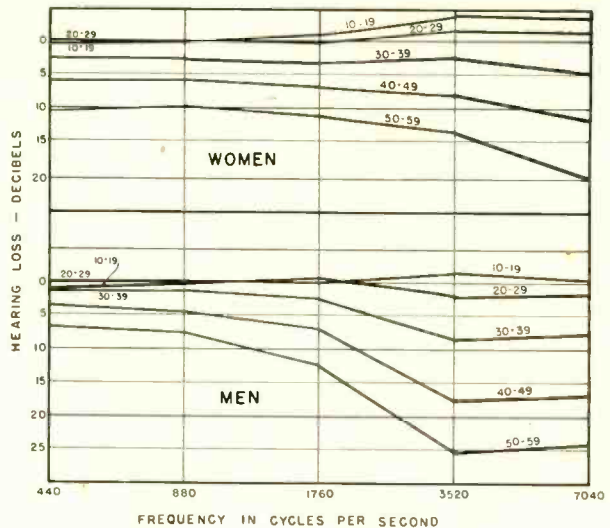

normally, but the brain itself does not take cognizance of the signals from the auditory nerve. This may be the situation in cases of psychological deafness such as battle-fatigue, and in cases of brain diseases or injury.

#### Threshold Measurement

In order to measure an individual's ability to hear, early tests used the distance a watch tick or coin click could be heard as an index. However, tests of this type include only narrow bands of frequencies and actually indicate threshold only for this group of frequencies. In order to compare the threshold of hearing of a given subject to the normal threshold, we need an instrument that will indicate how many decibels the subject's threshold is above or below the normal. Such an instrument has been devised and is known as an audiometer. Figure 1 shows a typical audiometer of the type used to obtain the data, known as audiograms, which will be discussed. To obtain these data the instrument is calibrated with a self-contained calibrating signal, and is then set to the lowest frequency with the output control set to minimum. The level is then raised until the subject indicates that he just hears the tone. To aid in determining this point a switch that cuts the signal on and off is provided. The level at which the subject first hears the tone is recorded and the data for all the other test frequencies are obtained in like manner. In performing the test the subject has the headphone on one ear for the entire run of frequencies and then repeats the test for the other ear. Several factors must be watched carefully in performing this test. The most important is the background noise, which should be very low. Another is the understanding on the

part of the subject as to what he shall indicate. Several authorities believe in using cotton in the ear not under test, but this usually does not increase the comfort of the subject and, therefore, may lead to erroneous results. The audiometer may also be provided with a microphone, bone conduction receiver, sound level indicator, and a masking source or provision for masking input. This last item is used when testing the poorer ear in which case the sound travels to the good ear by bone conduction through the skull. It is necessary to mask this tone in the good ear with noise from the masking source. In conduction deafness where the sound path from the air to the inner ear is obstructed, the results of the bone conduction test using the audiometer should be about the same as bone conduction results for a person with normal hearing, and the bone conduction receiver is used for that test. This is the common test for determining whether conduction or nerve deafness exists.

In testing for the ability of a person to meet the problems of daily life (social adequacy) articulation tests prove very useful. A person with partial hearing loss may not require a hearing aid at all in order to maintain social adequacy, although he may have a flat 20-db loss throughout the entire audio spectrum. Other people with "notches" in their audiogram may find it very difficult to get intelligence out of normal speech although their audiogram is almost normal. The microphone can be used to give audiometer articulation tests to find the speech threshold.

#### Determining Hearing Aid Need

It is difficult to judge whether a given subject requires a hearing aid or not,

[Continued on page 37]

# RECORD REVUE

**H**AVING DISPOSED of Koeschel & Co. last month, this department moves on to more of those inexplicable terms that constantly stare you in the face (or hit your suavely in the ear as parts of musical titles. This month's main problem is Italian, *allegro con variazione*.

Two aspects to tackle here—the facts and the prejudices. Take the latter first. Now as any Italian knows, the Italian language is just another language (albeit, to him, God's Own language, no doubt). It may be high-flying and elegant or it may be slang or worse. Language, any language, is designed to cover all possible situations. It is a funny thing, then, that whenever a language is borrowed by those who speak another tongue, it turns up high brow. French frieds are just potatoes, but *pommes frites* are something else again. In French Canada a *chien chaud* is exactly what it says, a hot dawg. But in New York it might turn up daintily as a *Saucisson à la Frankfurtois*—and even though that term maybe doesn't exist, it sounds *lots* fancier than Frankfurter. It's hard for us to believe, but when you go to Paris you'll discover that the French use English terms when they want to be really fawncy, just as we use French.

And so the use of Italian terms in music (to be explained in a moment) is automatically a high brow business, as every radio announcer knows. The higher the brow the better. Your announcer doesn't just rattle off the Italian—he puts sauce on it. No matter that if translated it may mean nothing more than “fairly fast but not too much so!” The Italian musical menu sounds just as superduper (to us) as the French one looks. Therefore, let us first of all, realize that this high brow stuff is neither here nor there, or it wasn't when Italian first became common for musical designations. It's neither the music's fault nor the performer's that we insist on it.

And why Italian? Consider first, that music is very much an international language of its own, with national dialects, so to speak, but using roughly the same musical sounds. And music is widely exchanged internationally. The musical notes themselves are universal—they have meaning anywhere—even in Russia. But musical notes (we do not often enough realize) are only the merest approximate indication of the actual sound of music. Composers either (a) expect you to know what was intended or (b) they supplement the written notes with instructions. Even so, with the fanciest instructions, music still isn't written down exactly, or anywhere near it. And so those instructions may loom quite important.

But if music is international, language

EDWARD TATNALL CANBY\*

isn't. And hasn't been since Latin went out as an internationally used language. What to do, if you want your instructions to go along with your written notes? That problem came up first when Europe began to get out of the feudal state and the invention of printing made it possible really to distribute knowledge in written form from one place to another in the mass. Music was a bit late in getting down to the idea of specific written notation, complete with instructions. (Earlier scores take a large amount for granted, including even the choice of voices or any instrument that happened to fit.) By the time it did, the great center of music happened to be Italy. For some two and a half centuries Italy was *the* musical country; almost all musicians were as a matter of course Italians, and Italian music and musical style were carried everywhere. (Germany became a top musical center only in the 19th century and lasted in top position just about a hundred years.) What could be more natural then, that during this period musical instructions were written in Italian, the language that went along with the music and most of the musicians that played it. Italian was so universally used that Handel in England wrote operas in Italian and, later on, so did Mozart, in Austria.

And naturally, the Italian instructions tended to form a kind of slang; they crystallized into fixed phrases that quite often *were* slang—that is, their literal meanings were changed for a special meaning that everybody knew. *Andante* is, literally, a term meaning “to go”; but in music it has been applied to music of a certain speed which seems to “go” right along—yet not fast. Everyone knows, within a rather large plus-or-minus tolerance, what kind of music “Andante” indicates. We find, today, the same kind of thing in our own language, applied to our own musical specialties where we Americans are on top. “Hot”, for instance—and that term with its special meaning is already international, as witness the famous French book, “Le jazz hot”.

In the long history of music the top ranking place was Germany's for only a short while, and today it is anybody's with Russia and France about equally important and America clearly on the upswing and likely to take over. Many composers have patriotically (if somewhat impractically) used their own language for instructions. Schumann always used German and so did other German musicians. Numerous Britishers have used

the British tongue, and Debussy—typical Frenchman—plastered his scores with quite elaborate French. But so far Italian remains, out of convenience, the language that one uses for international purposes; musically it is every composer's second language. The tradition continues because it is still useful, even though Italian music is relatively but a memory nowadays. (Remember that since we today spend most of our musical time in the past, playing older music, the great period of Italian importance is for all intents and purposes still very much with us, even though living Italian composers and performers no longer dominate music.)

I'll save the question of what is meant by the various and confusing Italian terms for a later opus, but one more point before the editor begins to cut this to size. Why do they use Italian instructions for *titles*—especially if they are not really highbrow but merely so much matter-of-fact slang? Why do we solemnly print on our programs such jargon as “*allegro con moto ma non troppo*” as the “name” of a piece? (“Fast—originally it meant happy—with movement, but not too much”). Why, in a symphony of four or even more movements, do we print, one under the other, a whole set of these terms?

Logical, if you look at it. In the first place, music makes its own sense and it doesn't necessarily have to have an explanatory title in the usual sense. It may be just music. A piece doesn't have to be named “Mount Fiddlesticks by Moonlight in September” to make sense. Most music is not given any name at all unless merely to indicate its general type or shape—in which case we usually print that as its official title—rondo, for instance—plus an identification of some sort to distinguish it from a thousand other rondos. But there may be lacking even this, and there usually is. Composers write music, not stories. In fact the only bit of description in printed words that is attached at all to many pieces of music is the simple indication in Italian at the beginning that gives an idea of the speed and/or the mood.

So, if you are to print a program which lists the music to be played and you want a handle for it, there's nothing to get hold of except that—unless you give it a real *musical* title and print actual musical notes! That being slightly impractical, the printed instructions at the beginning are taken as an official title and we speak of “the” *andante ma non troppo* from so-and-so symphony, which is utter nonsense if taken literally (“We will now play the going but not too much”) but quite reasonable and in fact inevitable, if you follow my somewhat lengthy logic!

[Continued on page 33]


\*279 W. 4th St., New York 14, N.Y.



**Response  $\pm 2.5$  db, 40 cps to 15 kc.,  
Output -46 db.**

**Broadcast Engineers Helped Design it!  
Network Shows Use it!**

**Now Compare it with Any in Your Studios!**

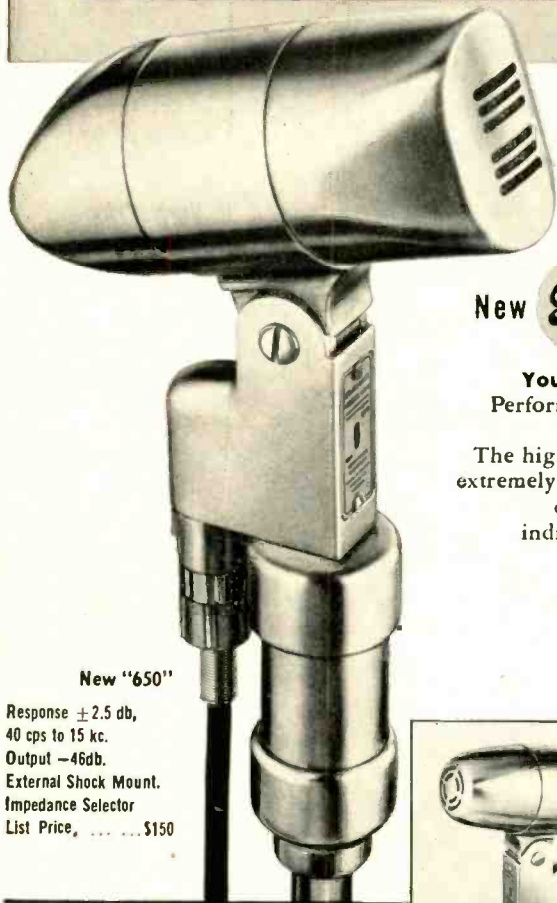

New  High Fidelity Broadcast Dynamic

**You've wanted** microphones like these!  
Performance meets the highest FM and AM broadcast standards. The bass end is smooth and flat. The highs are particularly clean and peak-free. Construction is extremely rugged and shock-resistant. Has E-V Acoustalloy diaphragm. Omni-directional. Each microphone individually laboratory calibrated and certified. Try one. Compare it with any mike in your own studios.


*Write for full facts today!*

**Electro-Voice**

ELECTRO-VOICE, INC., BUCHANAN, MICHIGAN  
Export: 13 E. 40th St., New York 16, U. S. A. Cables: Arib

**New "650"**

Response  $\pm 2.5$  db,  
40 cps to 15 kc.  
Output -46db.  
External Shock Mount.  
Impedance Selector  
List Price, . . . . \$150

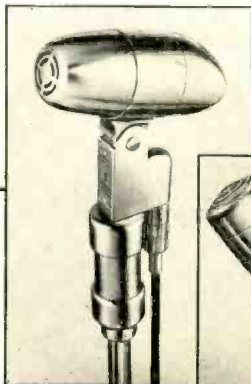

**New "645"**

Response  $\pm 2.5$  db,  
40 cps to 15 kc.  
Output -50 db.  
External Shock Mount.  
Impedance Selector.  
List Price . . . . . \$100



**The "635"**

Response  $\pm 2.5$  db,  
60 cps to 13 kc.  
Output -53 db.  
Impedance Selector.  
For Hand or Stand.  
List Price . . . . . \$60

# NEW PRODUCTS

• The **Omegatron Brush** is the newest contender for the honors of static elimination, and when first seen appears to be "out of this world." It consists of a fine three-inch camel hair brush on which is mounted a strip of polonium, a decay product of the uranium-radium series. With the Omegatron brush, record collectors can maintain the fidelity of their discs indefinitely because they can remove thoroughly the accumulation of dust and lint. Wiping with a conventional brush or with a cloth only causes a greater static charge, which immediately reattracts the dust. This is particularly objectionable with vinylite records, and the Omegatron makes it possible to clean the disc completely.

Polonium is a pure alpha particle emitter (no harmful beta or gamma) and the velocity of the particles is sufficient to enable them to traverse about 4 cm of air. Near alpha particle sources, air loses its insulating properties and dissipates the accumulation of static electricity in nearby objects. The renewable polonium strip has a life of one to two years.


The Omegatron brush is manufactured by Nuclear Products Co., 424 So. Broadway, Los Angeles 13, California, who will supply any further information desired.



Omegatron



Sorenson & Co. Inc.



Audio Instrument Co.

• The **Sorensen B-Nobatron**, bearing no relation to the above, is a regulated d.c. power supply which provides easily adjustable output voltages in two ranges—from 0 to 325 volts at a maximum of 125 ma, and from 0 to 150 volts at a maximum of 5 ma. Either terminal of the high-current section may be grounded, but the 150-volt supply is connected internally to the negative terminal of the 325-volt supply. In addition, the unit provides 6.3 volts a.c. at a maximum current of 10 amperes. The regulation is within 1 per cent for any voltage setting from 20 to 325 volts over the range from no load to full load. Regulation also compensates for line voltage variations between 105 and 125 volts, holding within 1 per cent over this range at full load current.

The unit, weighing approximately 45 pounds, is available either in a cabinet or for rack mounting. Complete specifications may be obtained from Sorensen & Co., Inc., Stamford, Conn.

• **Anti-Static No. 79**, mentioned in this column in the May issue, is the product of Merix Chemical Company, 1021 E. 55th St., Chicago 15, Ill. This material is a liquid which is simply wiped onto a surface, and when dry will prevent static formation.

• The **Model 121 Logger**, a product of the Audio Instrument Co., 1947 Broadway, New York 23, N. Y. indicates both maximum and minimum program level on the same meter range, and measures system noise level in silent intervals. The output is linear in db, and is indicated on the scale of a meter calibrated uniformly over a range of 50 db, as shown. With the output feeding a direct writing oscillograph through a suitable amplifier, it will record acoustical reverberation, the efficiency of studio operators in riding gain, or numerous other measurements. With generally available oscillographs, the Logger will record level variations as fast as 2500 db per second.

The logarithmic operation is instantaneous, and is achieved by the use of a new material operating with accurately stabilized bias. The built-in meter has the same operating speed as a standard VU meter, and for more rapid action, output may feed a 'scope. Unit includes preamplifier and necessary power supplies.

• **Magnecord, Inc.**, 360 N. Michigan Ave., Chicago, announces a new portable tape recorder mechanical assembly, the PT6-MA, for the professional user. This assembly consists of the basic tape drive mechanism and the auxiliary spooling unit in a portable carrying case, and is designed to work with any of the amplifiers manufactured by the same company. With the larger spools, the combination has a capacity of 64 minutes at a speed of 7 1/2" per second or 32 minutes at 15" per second. At the higher speed the instrument has a frequency response of 50 to 15,000 cps  $\pm$  2 db with less than 2 per cent harmonic distortion at full modulation. The unit form of construction permits the user to purchase only such components as are required.


• "**Sig-Max**," a simple means of matching FM and TV receiver inputs to the antenna, is a device which slips over the transmission line to improve the strength of low-level signals. To adjust, it is only necessary to tune in the weak signal, clip the unit onto the 300-ohm line, and slide slowly along the line to the point where the signal strength is adequate for good reception. Once the correct position is determined, Sig-



Magnecord, Inc.



"Sig-Max"

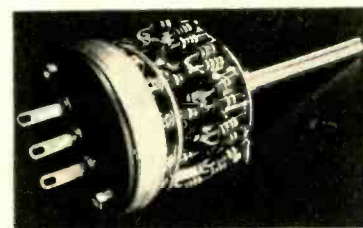

Livingston Electronic Corp.



Triad Transformer Co.

Max may be secured tightly by squeezing, or it may be held in place by tacks or screws. The device is a product of Telcite Television Corp., East Islip, N. Y.

• **Livingston Electronic Corporation**, Livingston, N. J. has added to its line of audio products a commercial version of the Loudness Control. This unit provides twenty-three steps of attenuation compensated in accordance with the Fletcher-Munson curves. Fabricated in an aluminum shield can with a three-terminal connection on the rear, it is designed to be substituted for the usual audio grid potentiometer. This control employs a single hole mounting, and requires a rear space of 2 3/8" in diameter and 2 1/2" deep. The photo shows the unit with the shield cover removed.

• **Miniature transformers** for a wide variety of low-level, low-power applications are available from Triad Transformer Mfg. Co., 423 N. Western Ave., Los Angeles 4, [Continued on page 32]

# The Language of Audio

JOHN D. GOODELL\*

Words are less precise than the means usually employed by engineers to convey a thought. The author clarifies meanings of many common audio terms.



ANYONE who has attempted to describe the character of a certain sound has found himself baffled in an attempt to find words that will surely convey his meaning. In a letter recently received, a correspondent tried for several paragraphs to describe adequately how piano records sounded played on a certain commercial phonograph. He finally wound up with the phrase, "... as though someone were beating on a mattress with a wooden spoon."

When a group of people are discussing cabinets for radio-phonographs and someone says, "I don't like a lot of fancy carving; I'd rather have the cabinet functional and simple," there is a good chance that everyone will know exactly what is meant. However, if the discussion concerns music reproduction and someone says, "The fiddles sounded a little mushy," the concepts of individuals in the group may vary considerably. Most audio engineers will relate this term to a specific quality of tone, usually to low frequencies, a quality that is the opposite of "crisp." Many people associate the term (as does the dictionary) with excessive sentimentality. It is equally likely that someone checking on the dictionary definition might find under "mush"—"Radio, a noise, like that of frying, heard when a receiving apparatus is tuned to waves from an arc transmitting station; it is due to irregularities in operation of the arc."

## Language of Audio


The language of audio, not the technical terminology but the language with which the character of sound is described, is a bastard sort of language made up largely of words borrowed from visual and tactual terminology. For the novice the terms are often extremely confusing, and even with professionals who have dealt with the problem of such discussions for years, misunderstandings are not uncommon. Many of the arguments about reproduction quality unquestionably stem from semantic confusions. Two people hear the same thing, have the same re-

\*The Minnesota Electronics Corp., St. Paul, Minn.

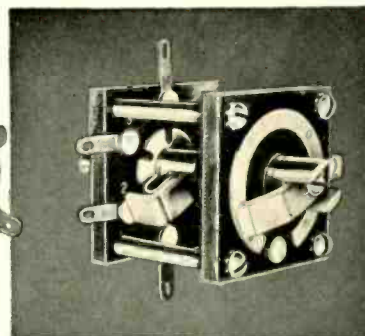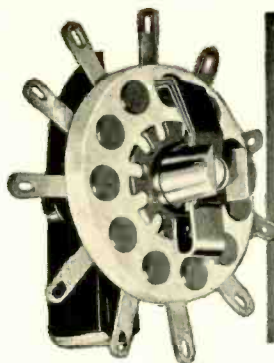


# Shallcross

for




## out-of-the-ordinary



# Switches

Shallcross Switches offer a broad assortment of finely made, low contact resistance rotary selector switch types for exacting applications. Numerous standard types in single and multi-section units up to 180 contacts can readily and economically be adapted to specific requirements.

Write for Switch Bulletin C-1 and C-2

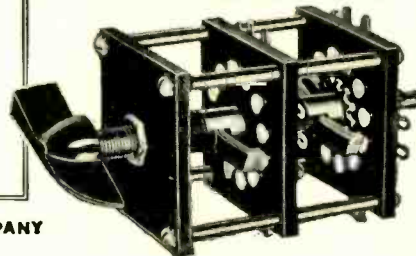

<p><b>AKRA-OHM PRECISION RESISTORS</b> 14 Standard Types. 50 available special designs.</p> <p><b>HIGH-VOLTAGE TEST EQUIPMENT</b> 1.5 to 200 KV</p> <p><b>BRIDGES</b> Wheatstone, Kelvin-Wheatstone, Percent Limit and Fault Location Types</p> <p><b>DECADE BOXES</b> 1 to 7 dial types, 0.1 to 11, 111, 110 ohms</p> <p><b>VOLTAGE DIVIDERS (DECADE POTENTIOMETERS)</b> Voltage ratios 0.0001 to 1.0</p> <p><b>ATTENUATORS &amp; CONTROLS FOR COMMUNICATION EQUIPMENT</b></p> <p><b>LOW RESISTANCE TEST SETS</b> From 200 micro-ohms to 100 ohms</p>
--


**SHALLCROSS MANUFACTURING COMPANY**  
DEPT. A-79, COLLINGDALE, PA.

# Floating Action!

for all TV Cameras

## "BALANCED" TV TRIPOD

Pat. Pending

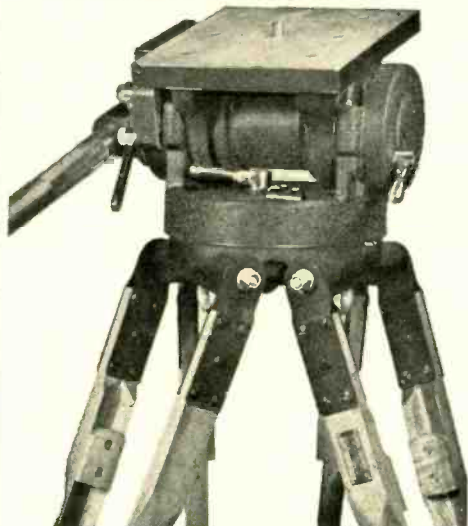

This tripod was engineered and designed expressly to meet all video camera requirements.

Previous concepts of gyro and friction type design have been discarded to achieve absolute balance, effortless operation, super-smooth tilt and pan action, dependability, ruggedness & efficiency.

Below:

3 wheel portable dolly with balanced TV Tripod mounted.



Complete 360° pan without ragged or jerky movement is accomplished with effortless control. It is impossible to get anything but perfectly smooth pan and tilt action with the "BALANCED" TV Tripod.

Quick-release pan handle adjustment locks into position desired by operator with no "play" between pan handle and tripod head. Tripod head mechanism is rustproof, completely enclosed, never requires adjustments, cleaning or lubrication. Built-in spirit level. Telescoping extension pan handle.

Write for further particulars

**CAMERA EQUIPMENT CO.**  
1600 BROADWAY NEW YORK CITY

## NEED BACK ISSUES?

Only a few are available and  
the supply is limited

<input type="checkbox"/> December 1947	<input type="checkbox"/> December 1948	1948 issues
<input type="checkbox"/> August 1948	<input type="checkbox"/> January 1949	50c
<input type="checkbox"/> September 1948	<input type="checkbox"/> March 1949	1949 issues
<input type="checkbox"/> November 1948	<input type="checkbox"/> May 1949	35c

Payment should accompany order.

Circulation Dept., Audio Engineering, 342 Madison Ave., New York 17, N. Y.

action to it but use different words to describe it, and wind up debating a non-existent disagreement at endless length.

It is in the hope of providing a basis for accepted meanings of more descriptive terms that this article is written. Perhaps it will be only the basis for arguments, but even this would be desirable if it would lead to a recognition of the problem and an effort at closer mutual understanding. Definitions are a result of accepted usage and they change with time. In most applications of words it is possible to refer to a standard dictionary and find reasonably accurate references for determining approximate meanings. In discussing music reproduction there is a great lack of words that have been sufficiently defined. On the other hand, an unabridged dictionary does contain an amazing variety of audio terms. The trouble is that relatively few people use it to full advantage.

There are certain basic dimensions for sound that can be tied down tightly; others are more difficult to establish. It is unfortunate that even such common terms as frequency and pitch, intensity and loudness, are used loosely as being synonymous. Conveying intelligence by means of words is difficult at best, and in dealing with a subject so inherently controversial as music reproduction it is surely important to make an effort toward rigorous definition and usage.

Among the more serious dangers is the one illustrated by the two pairs of words mentioned. In each case one is a subjective observation, the other a physical measurement.

### Basic Measurements

The basic absolute measurements that can be made of pure tones are frequency and intensity. Pitch is a subjective observation that is principally dependent on frequency but can be appreciably affected by intensity. Loudness is a subjective evaluation that is primarily a function of intensity but is strongly influenced by frequency. It is interesting that a few words have both physical and subjective validity. Typical of these are the terms "low" and "high." As a physical measure they pertain to a rate of occurrence with respect to time. Subjectively a low frequency appears to come from a lower point in space than a high frequency, though both may actually have the same source.

A considerable portion of the material that follows represents the results of a series of five listening tests. These were conducted at different periods us-

**Be aware of the Audio Fair!**

AUDIO ENGINEERING ● JULY, 1949

ing between 25 and 50 observers, not more than 20% of which could be considered highly trained in listening. These tests were conducted solely for the purpose of checking the concept of terminologies. All conclusions are based on a minimum of 80% agreement from at least four out of five groups. Sources of sound included live music from acoustic instruments, electronic musical instruments, recorded music and various laboratory devices for the direct generation of sound. The tests were conducted in three different locations under considerably varied acoustic conditions. Subjective suggestion was employed only to the extent of indicating the quality to be observed. Every effort was made to avoid psychological influence. Confirming experimental work previously accomplished by others is referenced in many instances.

#### Volume

A term that has led to a great deal of confusion is volume, particularly in its common use as a nomenclature for the gain control. This has probably become so firmly entrenched in the minds of the public that it must be accepted but it is a peculiarly unfortunate choice. To the public at large, and even to many non-professional audio enthusiasts, the percentage of maximum output power obtained, regardless of signal source, is thought of in quantitative relationship with mechanical rotation of this control. Volume becomes a loosely used synonym for output power, intensity and loudness. This means that it may be almost impossible to recover it for usage in its valid connotation as an audio dimension. It has been experimentally determined that volume may be observed as a quality of sound that varies inversely with frequency. In this usage it is undoubtedly related to a physical concept of size. The lower the frequency, the greater its apparent size—yet size is inadequate because the concept should be three dimensional and this implication is lacking. Volume, however, is almost perfectly descriptive. Again it is interesting to note that there is a relationship between the volume of the instrument producing the tone and the subjective evaluation of the tone itself.

#### Density

One other dimension of pure tones has appeared to have experimental validity. The word is *density* and it is shown to be directly proportional to frequency. There has been an effort to demonstrate that the derivation of this concept is associated with the density of the stimulation in the nerve structures. In view of the fact that untrained observers with no knowledge of the mechanism of perception are able to recognize this quality and differen-



When you pride yourself on mechanical and electrical equipment that holds noise better than 50 db below your program level, but still get noisy reproduction ...

DON'T BE MYSTIFIED ...



Switch to  
*Presto Discs*

Surface noise on Green Label discs is 60 db below program level.



PRESTO  
RECORDING CORPORATION

PARAMUS, NEW JERSEY

Mailing Address:

P. O. Box 500, Hackensack, N. J.

In Canada: Walter P. Dewas, Ltd.,  
Dominion Sq. Bldg., Montreal

World's Largest Manufacturer of Instantaneous Sound Recording Equipment and Discs

**Audax**  
Trade Mark

## reproducers



for  
**Microgroove DISCS**  
**Standard DISCS**  
**Vertical DISCS**

*The Standard by Which  
Others Are Judged  
and Valued*

It is futile to buy the most modern records, if you do not give them the very BEST pick-up to bring out their built-in excellence!

There is so much in present-day discs, that even a mediocre pick-up is bound to bring something out of them. However, to obtain the fullest results of which these discs are capable, they must be reproduced with the finest reproducer for that purpose—the AUDAX.

Remember, two singers may both be able to hit "high C" . . . yet one will please the ear—the other not at all. There is much more than mere WIDE-RANGE to quality reproduction. AUDAX reproducers deliver not merely WIDE-RANGE, but also all vital factors essential to highest quality of musical performance and unequalled

### EAR-ACCEPTABILITY

*Write for complimentary pamphlet on  
life of permanent points*

**AUDAX COMPANY**  
500 Fifth Avenue  
New York 18, N. Y.

*"Creators of Fine Electronic-  
Acoustical Apparatus since 1915"*

tiate it, this seems an unlikely theory. On the other hand, high-frequency wave forms in air are obviously denser and more compact than low frequencies. At any rate, the word is clear in its descriptive quality and is readily demonstrable as a dimension upon which groups of observers will agree.

In logical sequence, terms should now be considered that apply to isolated tones of complex wave form. All the terms used for pure tones are equally valid with regard to complex tones, provided that the fundamental is strong enough so that the observation of pitch may be definitely ascribed. There are endless adjectives that *may* be used to describe the character of complex tones as differentiated from pure tones, but only a few of the more common ones are mentioned here. Brightness is a characteristic that is observed in connection with pure tones, but appears experimentally to be synonymous with density rather than being a separate dimension. In connection with complex tones it is a function of harmonic structures and is particularly influenced by the odd order of higher harmonics. Experimentally, the addition of a second harmonic does not appear to affect appreciably the quality of brightness, while even a relatively small amount of third and fifth harmonics has a pronounced effect. This quality is also affected directly by intensity, is directly proportional to fundamental frequency and is influenced considerably by the rate of attack. A bell tone, for example, even though it may be produced from a pure source, appears to have appreciably greater brightness than a continuous tone or one with a slow attack. Doubtless this could be tied down to the presence of upper partials in transients inevitably associated with abrupt attack. An excellent example of this is observable with recorded piano tones. If the recording is observed by playing it normally versus playing it in reverse, the normal rendition of the tones will appear to be very bright by comparison with the tones played backwards where the attack is extremely slow and gradual. The frequency content and the average intensity will be essentially the same, and the only factor that is obviously varied in this experiment is the rate of attack. The term also bears some relationship to the rate of decay for staccato playing appears brighter than the same music from the same instrument where the notes are largely sustained.

### Brightness

Musicians often refer to one key as being brighter than another. It is conceivable that some musicians are able to differentiate this on a basis that is

50  
to  
18,000  
C. P. S. !



## THE NEW NC-108 RACK FM TUNER-RECEIVER

Now . . . National offers an 88-108 Mc. band FM tuner-receiver designed to meet the most exacting demands. Flat from 50 to 18,000 cps,  $\pm 2$  db, when connected to external amplifier or line.

Built-in speaker, audio output stage, standard de-emphasis switch, and tone control also permit use as ideal monitoring receiver. Built to National's famous standards of quality, the NC-108 is worthy of the finest in amplifiers and speakers. Nine tubes plus rectifier and tuning meter.

Write for complete specifications.

**National**  
EST. 1914

**NATIONAL COMPANY, Inc.**  
MALDEN, MASSACHUSETTS

not related to any specific piece of music but, if so, the quality appears to be as rare as perfect pitch. In all experiments with random observers, the higher keys for a specific piece of music sounded brighter. In the one experiment conducted with musicians this was equally true, except for a few who insisted that they could differentiate the sharp keys from the flat keys on the basis of brightness. The only physical basis readily conceivable for this would have to do with fact that the perfect pitch of C sharp, for example, is not the same as D flat.

Many terms for complex tones stem directly from concepts of shape. "Round" is associated in the observer's mind with a tone that he thinks of, literally, as being round in shape. Experimentally this seems to be associated with tones that have a predominance of even harmonics (although this is far from a limiting factor), and especially with tones that have a fairly slow attack with a minimum of initial transients. It has to do with continuous tones rather than abrupt tones. It is most often applied to horn tones, vocals (especially sopranos) and to certain organ tones. On the other hand, it would rarely be applicable to a violin tone or an oboe.

"Thin" might be chosen as an antonym although it must not be implied that this is a matter of black and white. A violin tone might not be considered round, but still not be thin. The word "thin" is recognized as being descriptive of sounds with a relatively weak fundamental and strong, very high harmonic content, particularly odd order harmonics. It is also used to describe orchestral arrangements lacking in adequate bass, as well as reproducing systems with poor low frequency response.

In discussing the quality of a reproducing system, it is seldom that its ability to reproduce a straight melodic line from a single instrument is considered. It is worthwhile to digress to the extent of pointing out that this fact may well be the basis for some of the confusion experienced in listening tests. It is not intended here to minimize the importance of having a system capable of responding properly to the full impact of an entire symphony orchestra. The point is that listening tests are terribly confused by psychological factors and also by the extremely complex dynamic wave forms the ear is required to judge. It is educational and interesting to investigate the qualities of a system on the basis of reproduction of individual instruments. For many reasons, a discussion

**Be aware of the Audio Fair!**

AUDIO ENGINEERING • JULY, 1949

Precision Engineered  
for *Finest* Equipment



**TURNER**  
Model 77 Tru-Cardioid

Tru-Cardioid pickup pattern. Wide angle pickup from the front, diminishing sharply to the rear with approximately 15 db discrimination between front and rear at all frequencies.



• Tru-Cardioid pickup pattern and smooth wide range response make the Turner Model 77 a truly outstanding microphone. A combination of velocity and dynamic generators produce the Tru-Cardioid pickup pattern which reduces feedback to minimum and practically eliminates extraneous sound arriving from the rear. Response is substantially flat from 70 to 10,000 c. p. s. with output of 62 db below 1 volt/dyne/sq. cm. at high impedance. Built-in switch gives instant selection of 50, 200, 500 ohms or high impedance output. Other features include 90° tilting head 3/4" - 27 coupler mounting, and quick-disconnect, balanced line cable set. Finished in gunmetal gray with chrome plated screen. The Model 77 Tru-Cardioid is recommended for quality recording, public address, and broadcast work.

**THE TURNER COMPANY**

929 17th Street N. E., Cedar Rapids, Iowa

IN CANADA: Canadian Marconi Co., Ltd.  
Montreal, P. Q., and branches

EXPORT: Ad. Auriema  
89 Broad Street, New York 4, N. Y.



LICENSED UNDER U. S. PATENTS OF THE AMERICAN TELEPHONE AND TELEGRAPH COMPANY, AND WESTERN ELECTRIC COMPANY, INCORPORATED

# PICKERING PICK-UP CARTRIDGES

- For the utmost in record playing pleasure
- For the greatest length of satisfactory service
- For those who want and demand the highest quality record reproduction, with all of the original modulation, realism and brilliance
- For minimum record wear
- For minimum extraneous and annoying sounds

**120 SERIES** for transcriptions and lacquer discs

**MODEL R-150** for phonograph records

**140 SERIES** for microgroove records

All Pickering Pick-up Cartridges are available with either a Diamond or Sapphire Stylus. . . Diamond Styli are good for thousands of playings whereas Sapphire Styli require replacement after a few hundred playings.

Pickering also manufactures Pick-Up Arms, Preamplifiers, Equalizer-Amplifiers and Equalizers.

## PICKERING & COMPANY

Oceanside, New York

## The Somerset DYNAMIC NOISE SUPPRESSOR\* PREAMPLIFIER

You haven't heard LIVE high-fidelity reproduction until you have heard a record played through a Somerset Dynamic Noise Suppressor.

### SPECIFICATIONS:

- Power supply** — 115 volts, 50-60 cycles, a.c.  
**Frequency range** — 40 to 15,000 c.p.s.  
**Gain** — .02 volts input produces .8 volts output to volume control of .25 to 1 megohm.  
**Input sources** — magnetic or crystal pickups, and FM or AM detector output.  
**Tube complement** — 2-6SL7GT, 1-6SK7GT, 1-6SJ7GT, 1-5Y3GT.  
**Size of chassis** 7" x 9" x 2".

Installation and operation require no technical skill.

A wide-range, high fidelity (30-15,000 cps) record reproduction system is of little value if it must be limited by tone or treble controls to 4,000 or 5,000 cps to avoid excessive surface noise. Such a control cannot eliminate the surface noise without also cutting off high frequency tones and destroying the quality of the music. The Somerset Noise Suppressor eliminates excessive surface noise more effectively than any prior device and does this dynamically without impairing the program quality. The Somerset device is neither a filter nor a tone control. When middle and high-frequency volume level is sufficient to mask the surface noise, the suppressor unit is effectively out of the circuit. As the intensity of the higher frequencies decreases, surface noise which would otherwise be heard is eliminated by a dynamic inversion process.

Thus the music quality is never impaired, but disagreeable high-frequency surface noise is reduced at all times to the point where it ceases to be objectionable.

\*Patent Pending

**SOMERSET LABORATORIES, INC.**

1701 Palisade Avenue,

Union City, New Jersey

of which in detail would be out of place here, it is often easier to select the better of two high quality reproducing systems on the basis of such an observation. Many engineers find speech more revealing than music, perhaps for this very reason.

### Fuzziness

"Fuzzy" is applicable to single tones, and also may be used to describe the over-all characteristics of a system. Usually it has its source in non-linear distortion where it is applied to reproducers. Deliberately introduced harmonic distortion, however, appears to bring a response from observers of a change in character—an increase, for example, in brightness or even harshness. Fuzziness is more related to intermodulation or to extreme alterations in quality such as might stem from a rubbing speaker cone or a stylus striking the pole piece of a magnetic pick-up.

The antonym for "fuzzy" is "clean." This is perhaps the most expressive and satisfactory word available for describing extremely good reproduction. Still, it is by no means an all encompassing term. It means freedom from non-linear distortion when applied to reproducing systems. It means unwavering attack of each note (whether it be abrupt or slow) in describing live music. "Clean" is probably synonymous with "clear," but in the mind of the audio engineer is more satisfactory because it expresses freedom from fuzziness and from any non-linear distortion. Again, though, a limited amount of harmonic distortion does not always reflect any lack of cleanness to the observer, while intermodulation is instantly detected as affecting the clean quality of reproduction. There is one more difference between "clean" and "clear." "Clean" does not contain any implication of frequency response. "Clear" may, on the other hand, indicate something about the high-frequency characteristics of a system, particularly with reference to some instruments with very high fundamentals.

Serious music (either classical or jazz music may under proper circumstances be so classified) is recognized as a vehicle for conveying an idea or mood—call it what you like—between the composer or performer and the listener. It is reasonable then that the words chosen for describing it should be words that correspond to a subjective experience that the music suggests. "Hard" is a term that is commonly used for tones that are relatively loud, that have a fairly abrupt attack and have harmonic content that may be small numerically but is strong in relation to the fundamental. It would seem reasonable that this word would



be the antonym for "soft," but such is not the case. A tone may seem hard and still not be loud, while "soft" is used to describe relative loudness only and not to indicate other qualities.

If the reactions to sound were objectively measurable quantities, the problem of conveying understanding by means of words would at least be simplified. Anyone who believes that the problem is unimportant is invited to review the literature of semantics. It isn't too easy to talk about everyday practical matters and be sure of conveying exact meanings, much less a subject of such tenuous and complex ramifications as subjective reactions to audible energy.

#### Audio Language Growth

The language of audio grows as a result of one person's expressing his reaction to a certain quality of tone in terms of his subjective association of it with something quite different. An observer feels that the adjective applies in terms of his own reaction and uses it again himself. This is the history of all language except for words that are deliberately built from other words of long established meaning. It is a natural but dangerous and difficult way for a language to grow. Many words that have purely subjective implications must develop in this manner through usage and somehow, intuitively, most people who hear the word may understand its meaning almost exactly as it is intended by the individual who uses it. It is important that this be a hoped for goal, and not one that is taken for granted. With words that can be tied down to objective definitions, it is of utmost importance that they be used correctly. It is well worthwhile for everyone periodically to check the dictionary definitions of the words they most commonly use, and to make an effort to conform reasonably with this reference for established concepts.

In connection with spoken words, there is the great advantage that the listener may question the meaning (though he doesn't do so as often as he should when he isn't certain of understanding), and elaborations will serve to clarify any possible misunderstanding. Inflection and all of the remarkably varied qualities of the voice may lend intelligence and understandability to words when they are spoken.

The written word is quite another matter. Requests for definition are not possible from the reader. Usage is considered to be more authoritative and may more greatly influence general concepts. Few people ever reach with the spoken word the enormous audience that is possible to the person who writes. Consequently every word that is written has much more influence,

# Choice of 626 Tubular Resistor Values IN STOCK

Hundreds of other Stock Types, sizes and values!



**the Variety! . . . the Range! . . . the Quantity!  
Ready to Meet Your Needs Quickly!**

More Ward Leonard wire-wound resistors have been produced and used over more years than any other make. And records show that quite often a *stock unit* as the *perfect answer* to many an industrial need . . . for *application*, for *performance*, for *economy*, for *quick delivery*. For example: there are 626 Vitrohm tubular stock values in fixed and adjustable types . . . and many others . . . promptly available! It pays to check into them . . . for *your requirements*.

Contact your local Ward Leonard  
Authorized Industrial Distributor.

Send now for handy

Stock-Unit Catalog D-130

Radio and Electronic Distributor Division

**WARD LEONARD ELECTRIC CO.**

53-R West Jackson Blvd., Chicago 4, U. S. A.



The sign of a  
Ward Leonard  
Authorized  
Industrial  
Distributor

## WARD LEONARD

RESISTORS • RHEOSTATS • RELAYS • CONTROL DEVICES

WHERE BASIC DESIGNS ARE RESULT-ENGINEERED FOR YOU

# GRAY

## BETTER REPRODUCTION FOR BROADCASTING — GRAY TRANSCRIPTION TURNTABLE 304T with exclusive RECORD LIFT



The Gray Transcription Turntable 304T assures you virtually perfect reproduction with 78 rpm or 33-1/3 rpm transcriptions.

- It features . . .*
- Absolute synchronism at 78 and 33-1/3 r.p.m.
  - Instant speed change
  - Single control for starting and speed change
  - Filters building vibrations
  - Record Lift lever-operated
  - No record slipping, flutter, wow
  - Record Lift guarantees exact timing
  - Maximum simplicity and SPEED of operation

Mounted in all metal cabinet 27" square. Price \$450 f.o.b. Hartford (Pickup, Equalizer, casters extra)




### GRAY STYLUS FORCE GAUGE 901

Preserve your record library. Check stylus force with this new gauge. Accurate to *grams*. As simple as it is important to use!

*Please ask for descriptive bulletins.*

**THE GRAY RESEARCH & DEVELOPMENT COMPANY, Inc.**  
16 ARBOR STREET • HARTFORD, CONN.

## A NEW STANDARD!

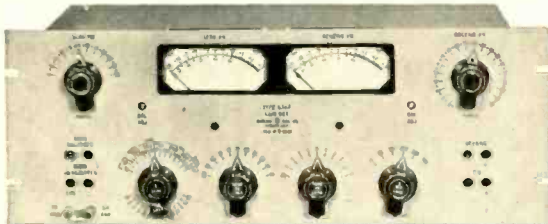

### Cinema type 6343 Gain Set

**Are you experiencing errors in high audio frequency readings?** Here's the answer . . . plus. Use a new Cinema 6343 Gain Set. Distinctive circuit design. Power overload errors eliminated. Maximum built-in flexibility.

We do not resort to corrective networks to overcome built-in leakage losses. These have been eliminated by this new Cinema design.

With the 6343 Gain Set, units of composite equipment will produce additive levels with accurate consistency. Guaranteed accuracy of plus or minus 0.2 DB over range of 20-20,000 cycles. Write for Bulletin C-1001.

See us at Booths 11 and 12 at the Pacific Electronic Exhibit, San Francisco, August 30, 31, September 1.



**CINEMA ENGINEERING COMPANY**  
1510 WEST VERDUGO AVENUE, BURBANK, CALIFORNIA

Export Agents: Frazer & Hansen, Ltd. • 301 Clay Street • San Francisco, Calif., U. S. A.

may lead to greater misunderstanding and greater confusion, than a thousand words spoken in general conversation. It therefore behooves every person who has the privilege of conveying his knowledge, his thoughts and his ideas by means of words on paper to be extremely careful that he be rigorous and accurate in his use of the language.

It is more than likely that this article contains many of the mistakes it condemns. It is not possible in its limited length to do more than present the problems involved in very brief outline and to indicate the derivation and definition of a few of the most commonly used words. If it serves only to emphasize the importance of the problem, to aid a few people in examining the meanings of the words they use, it will have been well worth writing. Words are without doubt the most powerful tools that men possess, and progress of all kinds depends directly on the development of associated verbal methods of conveying intelligence. Unquestionably a large portion of the misunderstandings, arguments and disagreements in the audio industry are a function of semantic confusion. Progress has been and will be intimately related to the accuracy with which knowledge is disseminated by means of words.

## NEW PRODUCTS

[from page 24]

Calif., with two new hermetically sealed types known as "Trijets." Both are  $\frac{1}{8}$ " in diameter, and mount by means of two 2-56 studs on  $\frac{1}{8}$ " centers. Type JO is 1-13/32" high, while Type JOA is 1-25/32" high. Where needed, 40-db alloy shielding can be supplied, and transformers can be fabricated to specification in a minimum of time.

• **High quality audio** in a table-model TV receiver is achieved in the newest addition to the Altec Home Music System line, largely by the use of the standard 8" Altec speaker and sufficient cabinet volume. The unit is available either in chassis form to



permit building-in with other music system components, or in the cabinet pictured. Of principal interest because of the excellent audio quality, video performance is also maintained to an equivalent standard, and the entire receiver is a worthy companion to the remainder of the Altec-Lansing line. information: Altec-Lansing Corp., 167 Sixth Ave., New York 13, N. Y.

## RECORD REVUE

[from page 22]

Naturally if there happens to be a better title it gets used. If your composer calls his piece "The Sunken Cathedral" or "The Afternoon of a Faun," so much the better. But, again, it must be remembered that such titles are in a way freaks, for music speaks in terms of *music* first of all and to describe music in exact *words* is like trying to translate something that can't really be translated, rather merely suggested. From this point of view, you see, the use of the Italian terms is an excellent idea for at least they tell you something specific about the music itself. What more could you ask?

### Recent Recordings

Walton, "Facade" (to the poems of Edith Sitwell).  
Edith Sitwell, Reader; Chamber Orchestra. F. Prausnitz.

Columbia LP: ML 2047 (MM 829)


• Here is an extraordinary LP. (The standard album is not yet released.) It is recorded here as performed with great *éclat* this spring in New York's Museum of Modern Art, with the great Sitwell herself reading her own poems to the music, as in the first performance twenty-five years ago. This will fascinate you or violently repel you—perhaps both! The stuff was put together in the high 20's, when William Walton (he was 19) and Miss Sitwell were strictly *avant garde* young people; it was one of the typically dizzy, jazzy, experimental efforts of that time, out to shock, funny, brassy, inelegant (but it seems elegant now, in spite of the jazz in it). It shocked all right. Noel Coward walked out before it was halfway through. But the early recording, made soon after, has kept turning up here and there ever since as an increasingly valuable collector's item; now, what with the enormous publicity the Sitwells, Edith and brother Osbert, got on their visit here (see recent *Life* magazine) the piece finally comes into its own, and if you don't enjoy it, or enjoy being mad at it, your blood pressure must be low.

The piece is a combination of music and narrator, but, as you'll very quickly find out, something utterly different from the now-so-smooth radio technique of music and voice that we are so accustomed to. Today, it's the fade technique: music down, voice up, musical bridges, music in and around and behind the voice. And a wonderfully effective technique it is. But Walton and Sitwell were strictly pre-radio. Background music didn't exist, nor did bridge music. Here you have a squawky, weeding, jazzy waltzy small orchestra that never stops a second except between poems, and you have Miss Sitwell's jazzy mellifluous, full-bottomed poems, never stopping for a split second. An extraordinary effect, for the two occur exactly in time, simultaneously, and neither gives way a fraction of a decibel to the other. The battle is humorous but relentless to the very end; the forces are exactly equal and the energy produced is fabulous. Only way to cope with it via the ear is to listen first to one, consciously, then (on the next playing) to the other. La Sitwell has Personality-plus

## For the first time

studio quality reproduction in an automatic record changer for all types of records: RCA Victor 7" 45 RPM, Columbia 7" LP, Columbia 10" and 12" LP 33 1/3 RPM, Standard 78 RPM 10" and 12" records—all played automatically.

**NEW** design plug-in pick-up heads permit use for the first time of highest quality pickups as used by many broadcasters.



PICKERING MATCHED CARTRIDGES

Controls are marked for simple selection, according to type of records to be played. Records may also be played manually. Quiet jam-proof mechanism. Webster Chicago 356-27PS supplied with special matched pair type W Pickering cartridges balanced to give only 17 grams stylus pressure on standard records and 6.7 grams on LP microgroove records. Special Pickering cartridges have built-in precision sapphire styli for standard and microgroove records. Price with cartridges, all hardware and instructions.....

**53<sup>21</sup>** NET

Webster Chicago 356-27 PD same as above with special matched pair type W Pickering cartridges equipped with laboratory ground diamond styli for years of finest reproduction with minimum record and stylus wear..... Price

**88<sup>21</sup>** NET

356-27 G.E., same as above, with pair of General Electric variable reluctance cartridges equipped with sapphire styli..... Price

**38<sup>95</sup>**

Above changers operate on 105-120 volts 60 cycles AC.

Dimensions: Base plate 14" x 14". Height above main plate 5 3/8". Below main plate 3 1/8". Note mounting size is same as older models 56, 156 and 256.

### THE NEW SOMERSET NOISE-SUPPRESSOR Tone-Corrected Pre-amplifier

**NOW** you can have a minimum of unwanted record noise with a maximum frequency range.



A new design giving a high degree of noise suppression with a frequency range of 40 to 15,000 cycles.

The degree of noise suppression is controlled by a calibrated indicator. The built-in equalized preamplifier with equalization control insures finest tone quality with cartridges like Pickering wide range magnetic, G.E. or other variable reluctance type cartridges.

Input also provides for use with crystal pickups and radio tuners.

The Somerset noise suppressor preamplifier has a self-contained power supply and is easily connected to any AC operated amplifier system or radio. Tubes: 2—6SL7GT, 1—6SK7GT, 1—6SJ7GT, 1—5Y3GT. Chassis size 7 x 9 x 5 1/2"

Price complete with **59<sup>50</sup>** NET

Same as above, but with controls on 4 ft. extensions. **62<sup>50</sup>** NET

**FREE!** WRITE FOR YOUR COPY OF OUR NEW 1949 CATALOG OF HIGH QUALITY SOUND EQUIPMENT

# TERMINAL

RADIO CORPORATION

Distributors of Radio & Electronic Equipment

85 CORTLANDT ST.—NEW YORK 7, N. Y. • Phone—Worth 4-3311 • Cable—TERMRADIO

## NEW... Improved Wiring Eliminates Leakage

### TYPE 12AT & TYPE 12ATK (KIT) TRANSMISSION MEASURING SET

Range: 111 db. in 0.2 steps.  
Frequency resp.: 0.1 db. from 0 to 20 kc.  
Accuracy: 0.1 db.  
Impedance, load section: 4, 8, 16, 50, 150, 200, 500, & 600 ohms.  
Impedance, trans. set.: 50, 150, 200, 500 & 600 ohms.  
Reference level: 1mw. into 600 ohms.  
Circuit: "T", unbalanced.  
Attenuators: 10x10, 10x1 & 5x0.2 db.  
Load carr. cap.: Transm. sect. 1 w. Load section 10 w.



A precision Gain Set with specially developed wiring that permits no troublesome leakage and provides improved frequency characteristics. Available completely assembled, or in kit form—which permits the sale of a high accuracy instrument at a low price.

WRITE FOR DESCRIPTIVE BULLETIN



Manufacturers of Precision Electrical Resistance Instruments  
PALISADES PARK, NEW JERSEY

## 3 SPEED TURNTABLE Using *Instantaneous* Speed Selector



### MODEL LP-743

Noise Level: —30 db  
Motor: 4 pole, induction  
Turntable: Cast aluminum  
Dimensions: L. 15"; W. 12"

LOOK! ONLY

**\$49<sup>95</sup>**  
NET

HOW IT WORKS!

3 SIMPLE OPERATIONS!

1. **78 r. p. m.**  
slide shift-lever to left
2. **45 r. p. m.**  
slide shift-lever to right
3. **33<sup>1</sup>/<sub>3</sub> r. p. m.**  
press selector button down,  
slide shift-lever to right



**REK-O-KUT COMPANY, INC.**

38-01 QUEENS BOULEVARD, LONG ISLAND CITY 1, N. Y.

such as you've seldom heard, a deep bass voice and a balloon-full of breath plus a superb sense of rhythm and timing. Moreover there is a devilish spark of enjoyment perfectly visible in her eye! No need to see it; you can hear it.

Recording? Excellent. Of all pieces this perhaps takes top prize as benefiting the most from "high fidelity". I've heard it wide range, and on a small radio (approx. cut-off 3000 cps) and the difference is incredible both in the orchestra's tone color and in the sibilants of the spoken words. Music? Dry, witty, humorous, good stuff for a 19-year old (or anybody, for that matter). A fine tango and a fox trot, some fake hill-billyish stuff, a wonderful take-off on "William Tell" (he figures in the accompanying poem) with odds bits of the familiar music worked in. Poems? Amusing, surrealistic, semi-intelligible, highly expressive mumbo-jumbo. You get a bit more on each hearing. Shades of Gertrude Stein (who also had a sense of humor)!

Strauss, Salomé; final scene.

Ljuba Welitch; Metropolitan Opera Orch. Reiner.

Columbia MX 316 (2)

• And here is the extreme opposite and an excellent contrast to the Walton-Sitwell madhouse. This, twenty-odd years before, was one of the two operas-to-end-all-horror-stories perpetrated by Richard Strauss upon a staggering world. (The other was the suave, murder-ridden, lustful "Elektra", recently recorded in part by Beecham.) Salomé, the gal who asked for John the Baptist's head and then made love to it, does exactly that in this scene and in the greatest of detail. She smacks her lips and you shiver your spine. Nevertheless, it's a scene whose clinging horror is undoubtedly a masterpiece of music drama. Welitch is one of the superb voices of our time, newly discovered in this country. Absolute control, a fantastically accurate sense of pitch, a high feeling for drama, an intuitive sense of style are a few of her outstanding accomplishments.

The recording made practically yesterday and rushed through processing, is as fine as anything Columbia has done. A departure from earlier Columbia Met. Opera recordings is the placing of the voice at stage distance (as one hears it) instead of close-up. It was interesting, for instance, to hear a voice like Pinza's almost tonsil-close in his "Mozart Opera Arias" album; but the present arrangement is musically far better. Keep an eye and an ear on Welitch.

Bartok, Concerto for Orchestra (1943).

Amsterdam Concertgebouw Orch. Van Beinum.

Decca frr EDA 105 (5)  
• If you tried out the recent Columbia version of this, standard or LP, by Reiner, you may want to compare. This is a fine performance of the modern but very easily listenable music, though at times it seems a bit stolid and heavy as compared with the always dynamic Reiner version. It has all the beauty of frr recording, but once again the standardized frr acoustics (always the same ultra-live effect) are not entirely suitable. The Columbia version comes out better. Trouble, though slight, comes from the fact that this is a concerto for

Watch for The Audio Fair!

whole-orchestra and numerous soloists with in the orchestra—there is wonderful music for solo clarinets, trumpets, oboes, etc. Columbia, with considerable close-to accentuation, brings out these solo passages beautifully; frrr, smoother and finer in over-all sound, keeps the soloists in the background via (evidently) a distant, one-mike pickup. In either version, in any case, this is a fine piece for test purposes, what with the combination of a big, romantic orchestra, lots of brass, and the profuse solo work for all sorts of instruments.

Liszt, Orpheus (tone poem).

Debussy, Printemps (symphonic suite).  
Sir Thomas Beecham, Royal Philharmonic orchestra.

RCA Victor DM 1295 (2)  
DM 1293 (2)

• Two more in the current series of odd Beecham items being reissued here by Victor. Both are well recorded with appropriate acoustics, both a somewhat less than brilliant in the highs, posing the usual question—what did the British originals (they're suppose to reach 20,000 cps) sound like? "Orpheus" is one of the quiet, introspective pieces; its moods, today, seem corny—all sweetness and light, with a harp (lyre) for Orpheus. But L. was no piker; the stuff grows on you and may well become your favorite bit of romantic music, for a while. "Printemps" is early and seldom heard Debussy, written before he had worked into his later and famous Impressionist style. This one impresses all right but it's about one half sweetened Tchaikowsky. Fine if the style pleases you. Though it's hardly important music this is a great deal better than a lot of the pretentious music in similar style we hear today at the movies. It makes a fine background.

Liszt, Les Préludes (symphonic poem).  
Leopold Stokowsky and His Symphony Orchestra.

RCA Victor DM, WDM 1277 (2)


• This stands next to "Orpheus" in a Liszt group of symphonic poems and it couldn't be more opposite in effect. "Les Préludes" is the brush, noisy, brilliant kind of Liszt. It has every stock movies mood you've ever heard but the dominant one is the heroic. This is Liszt as the P. T. Barnum of music and it is hardly surprising that as a show piece it's heard in a thousand performances to one of the more quiet "Orpheus", as well as in dozens of earlier recordings. The Stokowski performance here, plus the best of RCA's recent recording, makes it sound good; this is one of "Stokys" more careful and (relatively) restrained efforts. When he's in that mood. Stokowski is absolutely tops.

Strauss, "Rosenkavalier" waltzes.

Boston "Pops" Orchestra, Fiedler.

RCA Victor 12-0762 (1); 49-0307 (1 Vg)

• One of the first offerings on both standard and 45. (Why must RCA assign different numbers—when the *albums* in standard and Victorgroove have the same number?) Musically a rather heavy-handed job for the usually sprightly Fiedler gang (better known as the Boston Symphony). The phrasing here is oily, greasy (the phrases

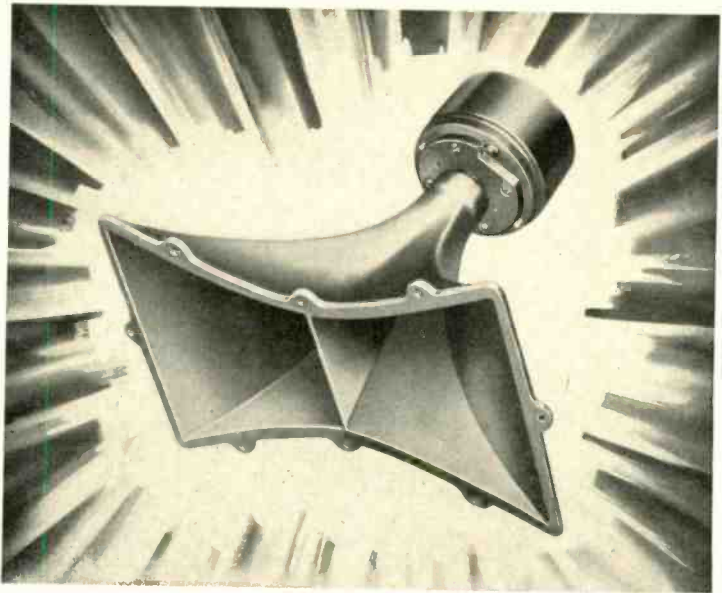

## YOURS FOR THE FIRST TIME

### A Moderate priced Cellular Speaker that reproduces HIGH FREQUENCIES

If you've been looking for a cellular horn speaker that really produces the upper frequency range required for high fidelity, at a moderate cost, just listen to the clear true-to-life tones reproduced by the new Racon two-cell high-frequency speaker and you'll agree your search is ended.

Latest product of Racon advanced engineering, this all cast aluminum high-frequency speaker is logarithmically expanded as two horns to give the widest distribution angle.

Power capacity of unit permits choice of cross-over point which makes best possible use of available cone speakers.

Specially designed for flush mounting in any cabinet; small enough to fit into the home console.

Supplied with instruction sheets and cut out pattern for cabinet.

Tweeter-Model #CHU2 Deluxe Aluminum casting  
List Price **\$37.50**

Tweeter-Model #CHU1 Standard Acoustic Cloth  
List Price **\$30.00**

Simple Capacitor Network—#CON-15  
List Price **\$ 9.00**

Variable Audio Taper Resistor Capacitor Network—  
#CON-15R List Price **\$11.00**

Resistive Capacitor Inductive Network—#CON-20  
List Price **\$22.50**

Write today for our catalog

**RACON ELECTRIC CO., INC.**

52 E. 19th Street., New York 3, N. Y.

# RACON

Speakers  
Horn Units  
Horns



The AUDIO FAIR is for YOU!

AUDIO ENGINEERING ● JULY, 1949

run together without the clean, crisp articulation one might expect from Boston) and the whole adds saccharine to maple syrup. Acoustics good, recording variable: side 1, shellac, seems distorted, as though playing stylus were worn, but side 2 is markedly clearer. The same is apparent on the Victor-groove versions, indicating perhaps a common faulty original at some stage. (Possibly this applies only to a few copies.)

Chausson, Symphony in B flat, opus 20.  
Minneapolis Symphony Orch. Mitropoulos.  
Columbia MM 825 (4)  
LP: ML 4141 (1)

• Another example of the Columbia ten-

dency to wide-range but overly close and dead recordings of Romantic works—that by rights should have a big, spacious, live sound. (Note that Decca flrr is often exactly the opposite, with big, live recordings of music that should be sharp and dry.) This is probably not too recent, but that is of little matter. The string tone has technically a wonderful edge and clarity here, brasses too are sharp and piercing but clean—and for those who are not too bothered by the wrong-style acoustics it makes a good demonstration record. Musically, this is another of those post-Franck works that, if you like the Cesar Franck symphony will

please you for similar reasons. Chausson was one of Franck's most devoted imitators and with considerable success. The performance here is full of life and full of rather careless playing, notably in the strings. Sounds like inspired sight reading in some spots. Schumann, Symphony #4 in D minor.  
Cleveland Orchestra, Szell.

Columbia MM 821 (3)  
LP: ML 2040 (1)

• Here's another similar to the above—but with better playing, not quite such dead acoustics. Szell's Cleveland Orchestra tends to play a bit on the rough side in its recent new Columbias, making his Mendelssohn for instance, something less than suave and perfect for Schumann it is good and the Szell intensity makes it exciting. Compared to older European recordings this one is, again, too close, too dead for the romantic music; clean, sharp qualities do much to make up for it. Here I have tried both LP and standard and (allowing as always for the numerous inevitable differences in playing conditions, curves, equipment etc.) my impression is that the LP version in this case is considerably superior. Shellac sounds relatively blurred and dull.

Mendelssohn, Symphony #4 ("Italian").  
Cleveland Orchestra, Szell.

Columbia MM 733 (3)  
LP: ML 4127 (1/2)

• Here is the same outfit, in the Mendelssohn style of music—more precise, less romantic, requiring more accurate, exact and skillful playing. Szell makes this familiar symphony more exciting and more intense than you've ever heard it before, notably in the last movement; but in the long run the RCA Victor recording (DM 1259) of Koussevitsky is much nearer the music's intentions. Acoustics in the Koussevitsky are broad, spacious, gracious, like the music; Szell's are again rather hard and dry (accentuating the somewhat harsh, driving performance). Koussevitsky's famous strings beat the Cleveland's by far. The LP reverse has a Capriccio for piano and orchestra of Mendelssohn, recorded back before the war. Tchaikowsky, Symphony #6 ("Pathétique").  
NBC Symphony Orchestra, Toscanini.

RCA Victor DV 27 (5 pl.)

• This luxury item on plastic is, I suggest, nothing you'll want to have; the Sixth is best heard on several European recordings of earlier days, occasionally to be found in this country at specializing stores. The Toscanini performance is, true to form, extremely intense to the point of nerve-frazzling, but to my ear it is cold as a stone and quite lacking in the measured expansiveness that is the only justification for Tchaikowsky's music, the broad, weeping emotion that some conductors, oppositely to Toscanini, overdo until it fairly drips. Not so here. And the recording, like most of the Toscanini jobs, is narrow, very dry and altogether unsuited to the music. (It is clearly noticeable, during the past few years, that the NBC as recorded with other conductors comes out with a better recorded sound than with Toscanini. No doubt a matter of conductor cooperation in the always-touchy job of placing microphones, arranging personnel.)

## PROCTOR SOUNDEX

### PLAYBACK UNIT

ANY

RECORD  
SPEED  
CARTRIDGE\*  
PRESSURE

INSTANTLY



### MULTI-SPEED TURNTABLE:

Employs new "Floating Disc Drive"  
Eliminates rim, gear, belt drives  
Eliminates wow and flutter  
Instantly shifts to 33 1/3 - 45 - 78  
No exchanging of idlers  
All speeds instantly available  
Light-weight, faster starting  
Available in 12" or 16" diameter

### SOUNDEX PICKUP ARM:

Uses new exchange Cartridge Carriers  
\*Adapts any 1/2" mounting cartridge  
Extra Carrier-mounted cartridges  
Permits instant substitution  
For both standard and microgroove  
Self contained Stylus Pressure Scale  
Precise pressure adjustment in grams  
Unique reduction of vertical inertia

Turntable and Arm each available alone or in unit as shown  
SEND FOR BULLETIN

**PROCTOR SOUNDEX CORP.**  
133 North 6th Ave. Mount Vernon, New York

SUN RADIO  
AMPLIFIER  
Model CR-10



only  
**\$42.50**

BRILLIANT HIGH-FIDELITY - -

## SUN RADIO ALL-TRIODE AMPLIFIER KIT!

FROM THE DESIGN PUBLISHED BY  
CONSUMERS RESEARCH, INC., OF  
WASHINGTON, N. J.

Treat yourself to superb audio quality found only in amplifiers costing many times more. Exclusive at Sun Radio!

• All-Triode, Self-Biased, 10 Watt, High-Fidelity Amplifier. • Frequency Response: 20-15,000 c.p.s. ± 1db. • Distortion: less than 2.5% at 10 Watts; 2.5% at mid-frequencies at 11.8 Watts. • Hum level: 60-70 db. below rated output at radio input. • Gain: radio, 75 db; phono, 97 db; magnetic pickup, 117 db at 50 c.p.s. • Built-in pre-amplifier and equalizer. • Complete with all 7 tubes, components, punched chassis, hardware, etc., simplified instructions, diagrams, and complete pictorial layout.  
**CR-10 Amplifier, laboratory-wired and tested \$69.50**

### SOUND ENTHUSIASTS!

Visit Sun Radio's famous Sound Demonstration Studio, where you may hear and instantly compare over 2600 different combinations of High-Fidelity sound components, just by pushing a button. Friendly, expert assistance to your sound problems. Free installation ideas. Plenty of excellent buys, too. We prefabricate all Sound Systems. Open daily, 9 AM to 6 PM.

25% deposit on C.O.D. orders

**SUN RADIO**  
AND ELECTRONICS COMPANY, INC.  
122-124 DUANE STREET  
New York 7, N. Y. Barclay 7-1840  
2 BLOCKS NORTH OF CHAMBERS ST

**Be aware of The AUDIO FAIR!**

## PROFESSIONAL DIRECTORY

**C. J. LeBEL**  
AUDIO CONSULTANT

Sound Recording • Instrumentation

370 RIVERSIDE DRIVE  
NEW YORK 25, N. Y.

### Winston Wells

Designer and Consultant  
Acoustical, Electronic and Nuclear  
Research  
307 East 44th St. MU 4-3487  
New York 17, N. Y.

### Custom-Built Equipment U. S. Recording Co.

1121 Vermont Ave., Washington 5, D. C.  
Sterling 3626

Consultation • Design • Fabrication

### Audio Facilities Corporaion

608 Fifth Avenue  
New York 20, N. Y.

### HERMAN LEWIS GORDON

Registered Patent Attorney

Patent Investigations and Opinions

Warner Building 100 Normandy Drive  
Washington 4, D. C. Silver Spring, Md.  
NAtional 2497 SIlkpherd 2433

RATES FOR  
PROFESSIONAL CARDS  
IN THIS DIRECTORY

●  
\$10 Per Month.  
Orders Are Accepted  
for 12 Insertions Only

## PROBLEMS IN AUDIO

[from page 21]

and illustrative audiograms are shown for typical cases. However, these should not be used as indices by the hard of hearing. Each person is subject to a particular set of circumstances and should consult his own physician.

Figure 2 shows the audiogram of a man with high loss above 2000 cps, but who had no difficulty in conversation or work. This is a case of nerve deafness. Examples of conduction deafness are shown in Fig. 3. Although the person with the audiogram of (A) has a 30 db loss, he did not require a hearing aid; the subject of the audiogram of (B) did.

It is of interest to note the results of the tests conducted by Steinberg, Montgomery, and Gardner at the New York World's Fair in 1939 and 1940. They are shown in part in Fig. 4. These curves show the average hearing characteristics in the age groups indicated. The increasing loss at high frequencies with increasing age is attributed to degeneration of the sensory cells. In the higher age groups particular cases may require hearing aids; this is not to be considered a strange malady, but a normal occurrence with increasing age.

Two additional effects which accompany deafness are tinnitus and recruitment. Tinnitus is the name given to the "ringing" sound heard when people are fatigued or have been subject to loud sound for long periods. It also occurs as a result of non-acoustic stimulation of the nerves in the inner ear. Such non-acoustic stimuli can be pressure on the eardrum or actual degeneration of the cell tissue or nerves. Recruitment is the name given to the phenomenon occurring with people who have hearing loss for low intensities, and normal sensitivity for high intensities. Often the sensitivity for high tones may be increased. The person suffering from this condition becomes annoyed when people raise their voices. The subject first complains that he cannot hear and then complains that the speaker is shouting.

This article has sketched the uses of articulation and intelligibility tests and has presented a brief outline of certain conditions arising in deafness. The references already listed in the previous articles have valuable material for those who wish to make a complete study of the subject. In particular, Dr. Hallowell Davis's "Hearing and Deafness" gives a good non-technical treatment of these three topics. The next article of the series will begin the study of sound generators.



#### TYPE "O"

Type "O" Series—shown at right is the 03-11 Plug, with three 30-amp. contacts, fits certain quality types, notably Western Electric.

#### TYPE "P"

Type "P" Series—P3-CG-12S Plug shown at right, is standard with most broadcast stations and used with RCA and other equipment. . . . 7 interchangeable inserts.

#### TYPE "XL"

Type "XL" Series—XL-3-11 Plug shown at right, is standard on certain RCA, Electro-Voice and Turner microphones. Two inserts: XL-3, XL-4.

Used on many types of sound and communication equipment in addition to microphone, Cannon Plugs are recognized by engineers, sound men and hams as the quality fittings in the field. Over a period of years various improvements have been made in insulating materials, shell design, material and clamp construction.

Available through many parts jobbers in the U. S. A. . . In Louisville: Peerless Electronic Equipment Co. In Flint: Shand Radio Specialties. In Syracuse: Morris Dist. Co. In Toledo: Warren Radio. In Norfolk: Radio Supply Co.

Bulletin PO-248 covers all the engineering data on the above 3 series; RJC-2 the prices; CED-8 Sheet lists jobbers. For copies address Department G-109.

SINCE 1915

# CANNON ELECTRIC

*Development Company*

3209 HUMBOLDT ST., LOS ANGELES 31, CALIF.  
IN CANADA—CANNON ELECTRIC CO., LTD.

Ready July 5th

# ULTRASONIC FUNDAMENTALS

By S. Young White

36 pp. 8½ x 11, 34 illus. Paper Cover, \$1.75 Postpaid.

A compilation of articles appearing in Audio Engineering over the past two years on this fascinating new branch of the audio field.

Covers: Elements, generation, coupling to load, testing, and applications in biology; effects in liquids and solids, economic considerations, and opportunities.


An important subject which is rapidly coming into prominence in a myriad of industries, and one in which big opportunities are open to anyone familiar with the methods used in working with "silent sound."

Book Division, Dept. A  
RADIO MAGAZINES, Inc.

342 Madison Ave., New York 17, N.Y.

# Techni - Briefs

FURTHER NOTES ON A 6AS7-G AMPLIFIER

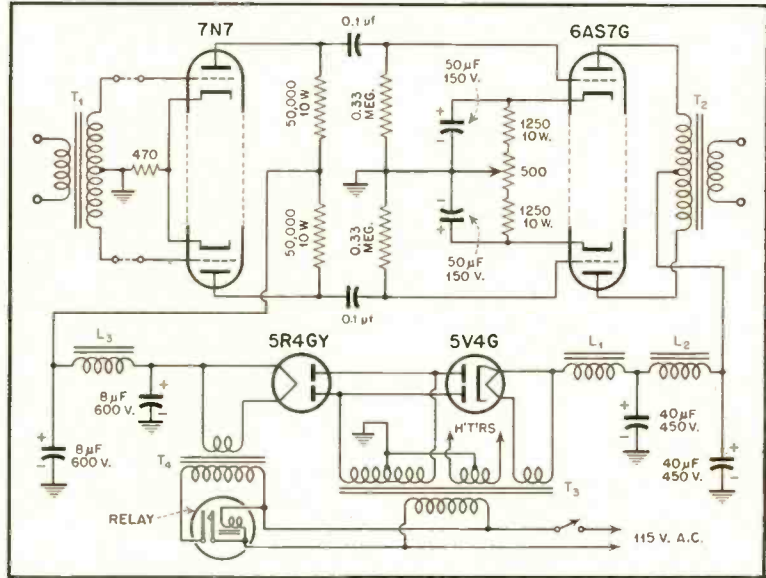

IN THE October 1948 issue, the writer published some notes on a 6AS7G amplifier. Since then, the driving stage has been modified; it is still push-pull throughout, but it now uses resistance-capacitance coupling instead of transformer coupling. In view of the large voltage needed for driving the 6AS7G, the voltage drop across the plate resistor is compensated by a rather large power supply voltage: with each half of a 7N7 taking 9 ma at 250 volts on the plate, the voltage drop across a 50,000-ohm plate resistor is 450 volts, and a supply voltage of 250 + 450 = 700 volts can be used without going beyond the tube ratings. The supply voltage employed is of the order of 530 volts, which is obtained by using the same power supply transformer with two different rectifiers. A 5V4G with a choke-input filter gives exactly 300 volts needed for the 6AS7G, and a 5R4GY with a capacitor-input filter gives 530 volts for the 7N7. An Amp-erite 15-second time relay delays this voltage until the cathode of the 7N7 is hot.

A 7N7 is used instead of a 6SN7GT, because of the symmetry of the socket connections: this allows symmetrical wiring, with extremely short connections. The circuit is shown above.

The two cathodes of the 7N7 have a common resistor. Two different resistors can be used, and a certain amount

## World-Wide Popularity

Since the inception of AUDIO ENGINEERING in May 1947, engineers and audio hobbyists have subscribed in ever-increasing numbers, not only in the 48 states and in all of the major foreign countries but in such places as Tasmania, Transvaal and Trinidad.

Each month AUDIO ENGINEERING covers the latest developments and practices in recording, reproduction and instrumentation for the entire audio field.

**Subscribe Now—Don't Miss an Issue! Back numbers are hard to get!**

AUDIO ENGINEERING  
342 Madison Avenue, New York 17, N. Y.

Sirs: Here is my  check (or  money order) for \$..... Enter my subscription order to AUDIO ENGINEERING for the next..... issues. Subscription Price: In U.S.A., Canada and Pan American Union—12 issues \$3—24 issues \$5. All others \$4.00 per year. Please check one:  New Subscription.  Renewal

Name (please print).....

Address..... City..... Zone..... State.....

Occupation (give title and department).....

Firm Name.....



of feedback introduced there. There is room for experimentation at this point. If the amplifier is to be used with a single-ended tuner with a pre-amplifier, any conventional system of phase inversion can be used.

Using the same parts as for the amplifier previously described, it may be said that, there is a slight, but definite, improvement in quality. The volume is about the same.

John van Heijenoort  
27 Coolidge Ave.  
Amityville, N.Y.

## AUDIO AMPLIFIER

[from page 14]

A partially by-passed screen circuit is used to provide current feedback, which reduces distortion and raises the input impedance of the booster tube at high frequencies. This effect makes the frequency response essentially independent of mixer adjustments.

The driver and output stage use tube types 9001 and 6AK6 respectively. Inverse voltage feedback is taken from a tertiary winding on the output transformer to the driver stage to minimize the overall distortion and noise. The output impedance is changed from 150 to 600 ohms by changing the two load windings from the parallel to the series connection. The 6-db isolation pads are inserted between the transformer and the output receptacle for both 150- and 600-ohm connections.

Typical performance characteristics are shown in Fig. 4. The frequency response is within 1 db from 50 to 15,000 cycles. The distortion is less than one per cent from 50 to 15,000 cycles. Noise is 70 db below the standard output of +18 dbm with the controls in typical operating positions. The maximum gain is 93 db.

The proportions of the amplifier case make it very easy to carry. It is narrow enough so that it will hang freely without bumping into the operator's legs. The amplifier is light enough to be truly portable. The design objective of a single unit amplifier with high level-mixing and emergency battery operation has been accomplished.


## LETTERS

[from page 4]

inite 120-cps tone, even if I stopper my ears. I have observed it for many years and there is no mistake about my actually hearing it (no "bats in the belfry"). Is this a form of Auditory Persistence similar to the persistence of Vision? Comments through your Letters Column by others with similar experience may lead to important new knowledge in this field.

May I tell you again how much I enjoy AUDIO ENGINEERING?

Benjamin F. Meissner  
Van Beuren Road, R. F. D. 2  
Morristown, N. J.

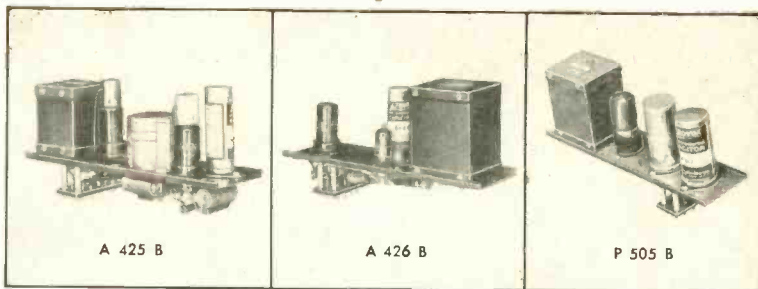

## ANNOUNCING A NEW LINE OF PRE-AMPLIFIERS TO MEET THE NEED FOR GREATER FLEXIBILITY IN PUBLIC ADDRESS & RADIO BROADCAST SYSTEMS

The new Altec Lansing line of input amplifiers meets a demand for units of small size with excellent characteristics. Dimensions of the A-425B Pre-Amplifier with mixer control, the A-426B Line Amplifier and the P-505B Power Supply are 2 1/2 inches wide by 10 inches long.

The 10675 Mounting Base permits mounting 6 units of any type in a standard rack or in a mixer console. Thus, complete facilities for 4 microphone inputs with line amplifier and power supply will occupy the space 19 inches wide by 10 1/2 inches high.

All amplifiers have a flat frequency response from 20 to 20,000 cycles.

☆☆☆☆☆☆

Full technical description upon request.

1161 North Vine St.  
Hollywood 38, Calif.

161 Sixth Avenue  
New York 13, N.Y.



**IN THE PROFESSION, AN HONORED NAME**

## A New Audio Instrument: THE BRIDGER

**MODEL 100 BRIDGER**—Connects a vacuum-tube voltmeter, distortion meter, and/or oscilloscope to a high-impedance circuit, such as an amplifier or counter, without loading it and changing the operating characteristics. A shielded cable may be used for eliminating hum without loading the circuit under test with the cable capacitance. Using an improved cathode follower and a specially designed double-shielded cable, the Bridger offers an input impedance of 100 megohms in parallel with 6 mmf at the end of a three-foot shielded cable, and an output impedance of 200 ohms.

**MODEL 104 VOLTAGE DIVIDER**—Extends input-voltage range to 250 volts when slipped on tip of the cable-probe of Bridger. Input impedance 100 megohms in parallel with 5 mmf; voltage ratio 100:1.

### Miniature Preamplifiers For Use With 640AA Condenser Microphones

Model No.	Output for 1 dyne/cm <sup>2</sup>	Output Z, ohms	Length, inches	Power Requirements			
				Plate E	Plate I	Fil. E	Fil. I
12	—40 dbm	250, bal.	10	135 v	2.2 ma	1.25 v	70 ma
14	—55 dbm	250, bal.	6 1/2	135 v	2.2 ma	1.25 v	50 ma
16	1.5 mv open ckt	500, unbal.	4 1/2	300 v	3.0 ma	6.3 v	200 ma

Diameter, all models — 1 1/4 inches

### MODEL 121 LOGGER

Logarithmic voltmeter with 50 db linear meter scale; output may be used to feed direct writing recorder (via a suitable amplifier) for acoustical reverberation tests. Input impedance—50,000 ohms; output impedance—1000 ohms.

### MODEL 140 DISC-NOISE METER

Overload-proof amplifier voltmeter for quality control of lacquers, phonograph records, transcriptions. New stable logarithmic element. 20-db linear meter scale. Minimum reading 75 db below 7 cm/sec. velocity with pickup cartridge supplied.

Our wide acquaintance with new methods and unusual techniques is used to give improved performance at reduced cost.

## AUDIO INSTRUMENT COMPANY

1947 Broadway

New York 23, N. Y.

# AMPERITE

Studio Microphones  
at P.A. Prices

Ideal for  
BROADCASTING  
RECORDING  
PUBLIC ADDRESS

"The ultimate in microphone quality," says Evan Rushing, sound engineer of the Hotel New Yorker.

• Shout right into the new Amperite Microphone—or stand 2 feet away—reproduction is always perfect.

• Not affected by any climatic conditions.  
• Guaranteed to withstand severe "knocking around."



Models  
RBLG—200 ohms  
RBHG—Hi-imp.  
List \$42.00



"Kontak" Mikes  
Model SKH, list \$12.00  
Model KKH, list \$18.00

Special Offer: Write for SpecioP introductory Offer, and 4-page illustrated folder.

**AMPERITE Company, Inc.**

561 BROADWAY • NEW YORK 12, N. Y.  
Canada-Atlas Radio Corp., Ltd., 560 King St. W., Toronto

## "THIS AMAZING HARTLEY-TURNER SPEAKER"

We have had more comments from American users on the 215 Speaker. Astonishment is expressed not only at the performance, but at the performance which comes from such an insignificant looking unit at such an insignificant price. We as the designers have no comment to make on this beyond the fact that the speaker was designed right through with the sole idea of producing music with as little distortion as possible. It didn't happen to be our idea of good art (or efficiency) to use a sledge-hammer to crack a nut even if the nut was a hard one.

In all seriousness we put the performance of the 215 up against that of any other speaker you like to think of, but the price is so right in these hard times that you will think it the best buy you ever made.

On this matter of price we fear we may have to increase it slightly in the near future, as costs over here are still taking an upward trend. Satisfied users have told us it would still be cheap at double the price, but we don't mean to double the price or anything like it. Meanwhile why not buy one now at \$39.50? By the time you pay the postman the import duty, it will have cost you \$45.00 and you will have got something you won't get elsewhere at any price. More important, you will have taken the first real step forward to get really truthful musical reproduction.

First distribution of data sheets is now being made to those who ordered "New Notes in Radio," the complete pocket guide to high fidelity. Send your \$1 bill now for your copy and that will ensure you a regular supply of information on all aspects of realistic sound reproduction. We have no end of good ideas we want you to know about.

**H. A. HARTLEY Co., Ltd.**  
152, HAMMERSMITH ROAD,  
LONDON, W. 6, ENGLAND

## ADVERTISING INDEX

Altec Lansing Corp.	39
Amperite Co., Inc.	40
Ampex Electric Corp.	10
Arnold Engineering Co.	9
Audak Company	28
Audio Devices, Inc.	Cover 2
Audio Instrument Company	39
Audio Facilities Corp.	37
Camera Equipment Co.	26
Cannon Electric Dev. Co.	37
Cinema Engineering Co.	32
Electro Motive Mfg. Co., Inc.	Cover 3
Electro-Voice, Inc.	23
Fairchild Recording Equip. Corp.	4
Freed Transformer Co.	2
Gordon, Herman Lewis	37
Gray Research & Dev. Co.	32
Hartley, H. A. Co., Ltd.	40
Hollywood Sound Institute	40
LeBel, C. J.	37
Maurer, J. A. Inc.	5
National Company, Inc.	28
Par-Metal Products Corp.	40
Pickering & Co., Inc.	30
Presto Recording Corp.	27
Proctor Soundex Corp.	36
Professional Directory	37
Racon Electric Co., Inc.	35
Radio Corp. of America (Broadcast Equip. Div.)	6, 7
Rek-O-Kut Company, Inc.	34
Shallcross Manufacturing Co.	25
Somerset Laboratories, Inc.	30
Sun Radio & Electronics Co., Inc.	36
Sylvania Electric Products, Inc.	1
Tech Laboratories, Inc.	34
Terminal Radio Corp.	33
Turner Company, The	29
United Transformer Corp.	Cover 4
U. S. Recording Co.	37
Vibration Systems, Inc.	40
Ward Leonard Electric Co.	31
Wells, Winston	37

## THE AUDIO FAIR

is your affair

Details in August issue!

## BUILD BETTER ELECTRONIC EQUIPMENT with STANDARDIZED



for

ALL P. A. NEEDS

Par-Metal Equipment is preferred by Service Men, Amateurs, and Manufacturers because they're adaptable, easy-to-assemble, economical. Beautifully designed, ruggedly constructed by specialists. Famous for quality and economy.

Write for Catalog.

**PAR-METAL PRODUCTS CORPORATION**

32-62-49th ST., LONG ISLAND CITY 3, N. Y.  
Export Dept.: Locke International Corp.  
13 East 40 Street, New York 16

### AUDIO ENGINEERING SCHOOL

A Practical Audio Engineering course in Sound Fundamentals: FILM, MAGNETIC and DISC Recording; Transmission Measurements; Monitoring and Mixing. Laboratories contain: Transmission Sets, Oscillators, Distortion Sets; Harmonic Analyzer; Intermodulation Analyzer and other eqpt. Recording Studio assimilating Broadcast, Motion Picture and Commercial Sound Recording. H. M. TREMAINE, Pres-Dir.

Approved for Veterans and Foreign Visas  
**HOLLYWOOD SOUND INSTITUTE Inc**  
1040-A No. Kenmore Hollywood 27, Calif.

### VERTICAL LATERAL

#### REPRODUCERS RECONDITIONED

Types 9-A, 9-B, D-93306, MI-4856, MI-4875-G  
Complete Stock of New Replacement Parts for All Types

This service is being used by leading radio stations and wired music companies from coast to coast. Factory prices prevail.


**VIBRATION SYSTEMS, INC.**  
1040 W. Fort St. Detroit 26, Michigan

### ADDRESS CHANGES...

Subscribers to AUDIO ENGINEERING should notify our Circulation Dept. at least 5 weeks in advance regarding any change in address. The Post Office Dept. does not forward magazines sent to a wrong address unless you pay additional postage. We can not duplicate copies sent to your old residence. Old and new addresses MUST be given.

**AUDIO ENGINEERING RADIO MAGAZINES, Inc.**

342 MADISON AVENUE  
New York 17, N. Y.

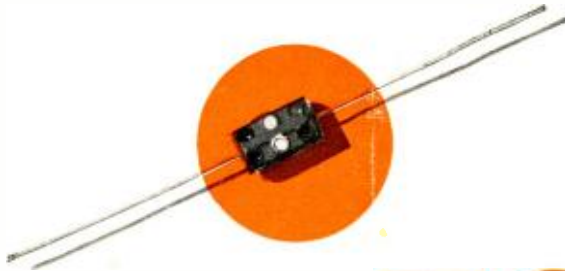

EL-MENCO'S PLACE


**in**

YOUR PRODUCT

*Wherever fixed mica dielectric capacitors are used,  
the first choice with men of experience is always El-Menco*

Precision-made under rigid conditions, tested seven ways to meet strict Army-Navy standards, thoroughly impregnated and provided in water-sealed low-loss bakelite; these tiny capacitors protect and maintain your reputation for quality equipment. To insure performance-excellence, place *El-Menco* capacitors in *your* product. Results will prove El-Menco to be a wise choice.


**THE ELECTRO MOTIVE MFG. CO., Inc.**  
WILLIMANTIC CONNECTICUT

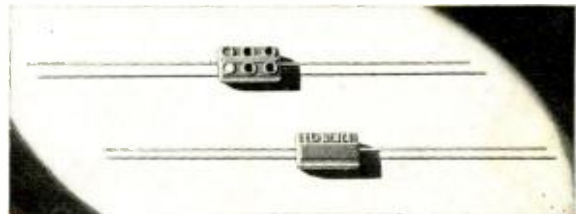

**CM 15 MINIATURE CAPACITOR**

Actual Size  $\frac{3}{8}$ " x  $\frac{1}{2}$ " x  $\frac{3}{16}$ "  
For Radio, Television and Other  
Electronic Applications  
2 to 420 mmf. capacity at 500v DCw  
2 to 525 mmf. capacity at 300v DCw  
Temp. Co-efficient  $\pm 50$  parts per  
million per degree C for most  
capacity values  
6-dot standard color coded

Write on your firm letterhead for  
Catalog and Samples



**MOLDED MICA** **El-Menco** **MICA TRIMMER**  
**CAPACITORS**

FOREIGN RADIO AND ELECTRONIC MANUFACTURERS COMMUNICATE DIRECT WITH OUR EXPORT DEPT. AT WILLIMANTIC, CONN.  
**ARCO ELECTRONICS, INC.** 135 Liberty St., New York, N. Y.—Sole Agent for Jobbers and Distributors in U.S. and Canada




# Linear Standard Units...

## THE ULTIMATE IN QUALITY...

UTC Linear Standard Audio Transformers represent the closest approach to the ideal component from the standpoint of uniform frequency response, low wave form distortion, high efficiency, thorough shielding and utmost dependability.

### UTC Linear Standard Transformers feature...

- **True Hum Balancing Coil Structure**... maximum neutralization of stray fields.
- **Balanced Variable Impedance Line**... permits highest fidelity on every tap of a universal unit... no line reflections or transverse coupling.
- **Reversible Mounting**... permits above chassis or sub-chassis wiring.
- **Alloy Shields**... maximum shielding from inductive pickup.
- **Hiperam-Alloy**... a stable, high permeability nickel-iron core material.
- **Semi-Toroidal Multiple Coil Structure**... minimum distributed capacity and leakage reactance.
- **Precision Winding**... accuracy of winding .1%, perfect balance of inductance and capacity; exact impedance reflection.
- **High Fidelity**... UTC Linear Standard Transformers are the only audio units with a guaranteed uniform response of  $\pm 1$  DB from 20-20,000 cycles.




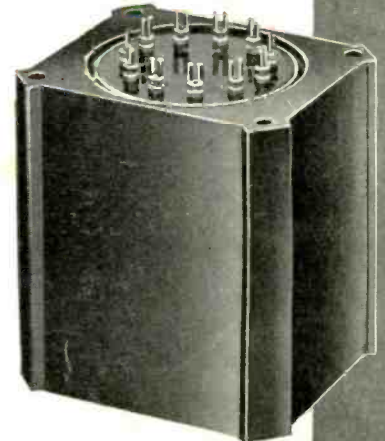


## TYPICAL LS LOW LEVEL TRANSFORMERS

Type No.	Application	Primary Impedance	Secondary Impedance	$\pm 1$ db from	Max. Level	Relative hum-pickup reduction	Max. Unbalanced DC in prim'y	List Price
LS-10	Low impedance mike, pickup, or multiple line to grid	50, 125, 200, 250, 333, 500/600 ohms	80,000 ohms in two sections	20-20,000	+15 DB	-74 DB	5 MA	\$25.00
LS-10X	As Above	As above	50,000 ohms	20-20,000	+14 DB	-92 DB	5 MA	32.00
LS-12	Low impedance mike, pickup, or multiple line to push pull grids	50, 125, 200, 250, 333, 500/600 ohms	120,000 ohms overall, in two sections	20-20,000	+15 DB	-74 DB	5 MA	28.00
LS-12X	As above	As above	80,000 ohms overall, in two sections	20-20,000	+14 DB	-92 DB	5 MA	35.00
LS-26	Bridging line to single or push pull grids	5,000 ohms	80,000 ohms in two sections	15-20,000	+20 DB	-74 DB	0 MA	25.00
LS-19	Single plate to push pull grids like 2A3, 6L6, 300A, split secondary	15,000 ohms	95,000 ohms; 1:25:1 each slide	20-20,000	+17 DB	-50 DB	0 MA	24.00
LS-21	Single plate to push pull grids, split primary and secondary	15,000 ohms	135,000 ohms; turn ratio 3:1 overall	20-20,000	+14 DB	-74 DB	0 MA	24.00
LS-22	Push pull plates to push pull grids, split primary and secondary	30,000 ohms plate to plate	80,000 ohms; turn ratio 1.6:1 overall	20-20,000	+26 DB	-50 DB	25 MA	31.00
LS-30	Mixing, low impedance mike, pickup, or multiple line to multiple line	50, 125, 200, 250, 333, 500/600 ohms	50, 125, 200, 250, 333, 500/600 ohms	20-20,000	+17 DB	-74 DB	5 MA	25.00
LS-30X	As above	As above	As above	20-20,000	+15 DB	-92 DB	3 MA	32.00
LS-27	Single plate to multiple line	15,000 ohms	50, 125, 200, 250, 333, 500/600 ohms	20-20,000	+20 DB	-74 DB	8 MA	24.00
LS-50	Single plate to multiple line	15,000 ohms	50, 125, 200, 250, 333, 500/600 ohms	20-20,000	+17 DB	-74 DB	0 MA	24.00
LS-51	Push pull low level plates to multiple line	30,000 ohms plate to plate	50, 125, 200, 250, 333, 500/600 ohms	20-20,000	+20 DB	-74 DB	1 MA	24.00
LS-141	Three sets of balanced windings for hybrid service, center-tapped	500/600 ohms	500/800 ohms	30-12,000	+10 DB	-74 DB	0 MA	28.00

## TYPICAL LS OUTPUT TRANSFORMERS

Type No.	Primary will match following typical tubes	Primary Impedance	Secondary Impedance	$\pm 1$ db from	Max. Level	List Price
LS-52	Push pull 2A5, 250, 6V6, 42 or 2A3 A prime	8,000 ohms	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	15 watts	\$28.00
LS-55	Push pull 2A3's, 6A5G's, 300A's, 275A's, 6A3's, 6L6's	5,000 ohms plate to plate and 3,000 ohms plate to plate	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	20 watts	28.00
LS-57	Same as above	5,000 ohms plate to plate and 3,000 ohms plate to plate	30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	20 watts	20.00
LS-58	Push, pull parallel 2A3's, 6A5G's, 300A's, 6A3's	2,500 ohms plate to plate and 1,500 ohms plate to plate	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	40 watts	50.00
LS-6L1	Push pull 6L6's self bias	9,000 ohms plate to plate	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	30 watts	42.00

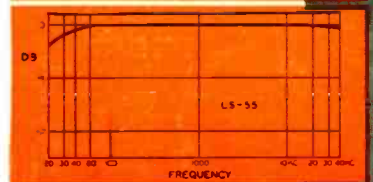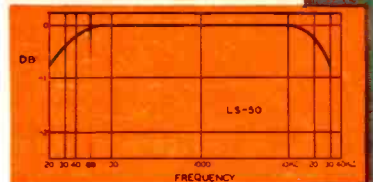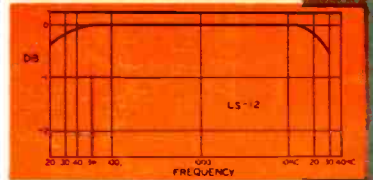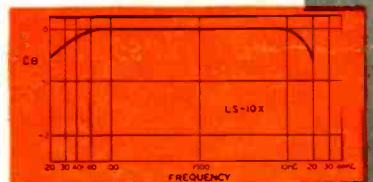

Write for our Catalog PS-439

*United Transformer Co.*

150 VARICK STREET NEW YORK-13, N. Y.  
EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y., CABLES: "ARLAE"