

Radio Editors of magazines and newspapers are hereby given permission to reprint in whole or in part, with proper credit to the Aerovox Corporation, the contents of this issue of the Aerovox Research Worker.

# The AEROVOX

## Research Worker

The Aerovox Research Worker is a monthly house organ of the Aerovox Corporation. It is published to bring to the Radio Experimenter and Engineer authoritative, first hand information on capacitors and resistances for radio work.

VOL. 18, NO. 9

SEPTEMBER, 1946

50c per year in U.S.A.  
60c per year in Canada

## V. H. F. PRIMER

### PART 7. CAVITY RESONATOR TABLES

*By the Engineering Department, Aerovox Corporation*

The accompanying table gives dimensions of cavity resonators of square prism, spherical, and cylindrical shapes for principal mode frequencies between 1000 and 30,000 megacycles. Cavity resonators often are specified in this frequency range. The Editors believe that the three simple shapes for which dimensions are given in the table will be the most commonly available to experimenters desiring pre-calculated data.

Dimensions in the table are inside dimensions and are in inches. Resonant frequencies are in megacycles per second. The 59 resonant frequencies given in column 1 have 500-Mc. separation which should be adequate in most cases. However, cavity resonator dimensions corresponding to frequencies not given in column 1 may be found by multiplying the 1000-Mc. dimension (for the desired cavity shape) by  $1000/f_x$ , where  $f_x$  is the desired resonant frequency in mega-

cycles. For example: It is desired to know the inside diameter of a spherical cavity whose resonant frequency is 3235 megacycles. Multiply 8.35 (which is the diameter of a spherical cavity at 1000 Mc.) by  $1000/3235$ . Thus,  $8.35 (1000/3235) = 8.35 (0.3091) = 2.581$  inches.

Similarly, the resonant frequency corresponding to a cavity dimension not given in the table may be found: Multiply 1000 by  $X/Y$ , where  $X$  is the dimension given for a cavity of the same shape at 1000 Mc. and  $Y$  is the dimension of the cavity in question. Thus: What will be the resonant frequency ( $f$ ) of a cylindrical cavity of  $\frac{3}{4}$ " diameter? From the table, it is seen that a cylindrical cavity is 9.05 inches in diameter at 1000 megacycles. Therefore  $f = 1000 (9.05/0.75) = 1000(12.066) = 12,066$  Mc.

The following convenient formulae are given for the benefit of the reader

who desires to make direct calculations for purposes of his own:

#### SQUARE PRISM

$$(1) a \text{ (inches)} = 8347.2/fMc$$

#### SPHERE

$$(2) b \text{ (inches)} = 10,360/fMc$$

#### CYLINDER OF CIRCULAR CROSS SECTION

$$(3) c \text{ (inches)} = 9050.6/fMc$$

When it is desired to convert the dimensions given in the accompanying tables into centimeters (as, for example, when comparing these dimensions with similar tables and data in other engineering papers and texts), multiply the listings in columns 2, 3, 4, or 5 by 2.54.

## AEROVOX PRODUCTS ARE BUILT BETTER




# CAVITY RESONATOR DIMENSIONS

1000-30,000-Mc, RANGE

● For Fundamental Mode

FREQUENCY (Mc.)	WAVELENGTH (cm.)	DIMENSION A (inches)	DIMENSION B (inches)	DIMENSION C (inches)
1000	30.00	8.35	10.36	9.05
1500	20.00	5.56	6.90	6.03
2000	15.00	4.17	5.18	4.52
2500	12.00	3.34	4.14	3.62
3000	10.00	2.78	3.45	3.01
3500	8.57	2.38	2.95	2.58
4000	7.50	2.09	2.59	2.26
4500	6.66	1.85	2.29	2.01
5000	6.00	1.67	2.07	1.81
5500	5.45	1.51	1.87	1.64
6000	5.00	1.38	1.72	1.50
6500	4.62	1.28	1.59	1.39
7000	4.29	1.19	1.48	1.29
7500	4.00	1.11	1.38	1.20
8000	3.76	1.04	1.29	1.13
8500	3.53	0.985	1.22	1.07
9000	3.34	0.926	1.15	1.00
9500	3.16	0.876	1.09	0.950
10,000	3.00	0.835	1.04	0.905
10,500	2.86	0.795	0.987	0.862
11,000	2.73	0.760	0.941	0.822
11,500	2.61	0.725	0.900	0.788
12,000	2.50	0.696	0.863	0.755
12,500	2.40	0.668	0.828	0.724
13,000	2.31	0.642	0.798	0.696
13,500	2.23	0.619	0.768	0.671
14,000	2.14	0.596	0.740	0.647
14,500	2.07	0.577	0.714	0.625
15,000	2.00	0.558	0.690	0.602
15,500	1.94	0.539	0.669	0.583

CAVITY RESONATOR  
DIMENSIONS  
(Continued)

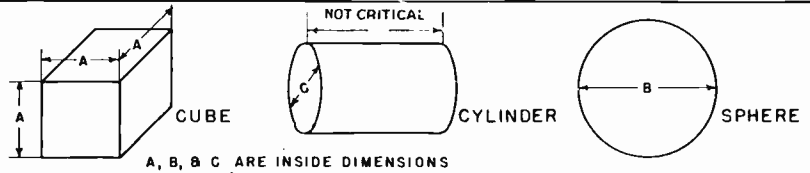

FREQUENCY (Mc.)	WAVELENGTH (cm.)	DIMENSION A (inches)	DIMENSION B (inches)	DIMENSION C (inches)
16,000	1.88	0.521	0.648	0.568
16,500	1.82	0.506	0.629	0.549
17,000	1.76	0.491	0.610	0.532
17,500	1.72	0.477	0.592	0.518
18,000	1.67	0.464	0.577	0.501
18,500	1.62	0.451	0.560	0.489
19,000	1.58	0.439	0.546	0.476
19,500	1.54	0.428	0.531	0.464
20,000	1.50	0.418	0.519	0.453
20,500	1.46	0.407	0.505	0.442
21,000	1.43	0.397	0.493	0.432
21,500	1.39	0.388	0.482	0.421
22,000	1.36	0.379	0.471	0.412
22,500	1.33	0.371	0.460	0.403
23,000	1.30	0.363	0.450	0.394
23,500	1.28	0.355	0.441	0.385
24,000	1.25	0.347	0.432	0.377
24,500	1.22	0.341	0.423	0.369
25,000	1.20	0.334	0.415	0.363
25,500	1.18	0.327	0.407	0.355
26,000	1.15	0.321	0.398	0.348
26,500	1.13	0.315	0.391	0.341
27,000	1.11	0.309	0.384	0.335
27,500	1.09	0.304	0.377	0.329
28,000	1.07	0.298	0.370	0.323
28,500	1.05	0.293	0.363	0.317
29,000	1.03	0.288	0.358	0.312
29,500	1.02	0.283	0.352	0.307
30,000	1.00	0.278	0.345	0.302

# Millions

## now in daily use...



● Yes, MILLIONS of electric refrigerators, not to mention oil burners and other fractional-horsepower electric appliances with capacitor-type motors, are equipped with Aerovox capacitors ● Aerovox pioneered the high-capacitance electrolytic capacitor for motor-starting. Working in closest collaboration with motor designers and manufacturers, Aerovox produced the major portion of all such capacitors in daily use. And Aerovox is maintaining the out-

standing selection of replacement capacitors whereby those capacitor-type motor sare kept going in postwar America ● Electrolytics are but one of many major types of capacitors developed and produced by Aerovox. Available now are Aerovox oil-filled capacitor types for your power-factor correction job. Likewise with mica, paper and other Aerovox types — these are coming through in tremendous quantities. Just keep Aerovox in mind.

● Submit your capacitance problems for engineering collaboration, specifications, quotations.



### FOR RADIO-ELECTRONIC AND INDUSTRIAL APPLICATIONS

AEROVOX CORPORATION, NEW BEDFORD, MASS., U.S.A.

SALES OFFICES IN ALL PRINCIPAL CITIES • Export: 13 E. 40th St., New York 18, N.Y.

Cables: 'ARLAB' • In Canada: AEROVOX CANADA LTD., HAMILTON, ONT.