## It's lafayette for... THE BEST.. THE MOST.. at the LEAST!

## NEW! TRANSISTORIZED POWER Portable Sound Broadcaster

- IDEAL FOR OUTDOOR HAMFESTS
- EFFICIENT HORN PROJECTS SOUND 1000 FT.
- MICROPHONE DETACHABLE ON 3 FT. CORD
- SHOULDER STRAP FOR EASE OF USE

A transistarized power megaphone with many unusual features and many applications, Basically a highly efficient sound projector harn with a built-in microphone capable of amplifying and prajecting the volce with a range of 1000 feet. The microphone is a telephone-type element, easily replaceable, and may be detached and extended up to 3 feet from the harn. The reflex-type harn is extremely liahly weight, of stury soun eluminum conis extremely light weight, of sturdy spun aluminum con-struction with a strap for carrying or placing on the shoulder. A press-to-talk switch on the handle provides



far economy of power use-pawer is used only wher actually talking. No warm-up time required—amplification is instantaneous. Has control for setting three different valume levels to suit any environment. A potentied non-linear current limiting device restricts current flow te safe levels for langest bottery life. Uses a 9-volt transistor battery, Access to battery can be easily reached by remaving the microphone unit. Size 12½" lang overalk horn mouth is 7½" diam. Shpg. wt., 3½ lbs.

Not 29.50

## NEW! "ELECTRO-STRIKE-OMETER"®

- BEST FITTED FOR ALL KINDS OFF-SHORE FISHING
- EASILY ATTACHED TO RODS
- · ACCURATE METER READING



## NEW! 10.000 OHMS PER VOLT MULTITESTER

## **Outperforms Instruments** Many Times its Size

- EXTRA LARGE 31/2" METER FACE
- COMPLETELY WIRED (NOT A KIT)
  ALL ACCESSORIES INCLUDED

## **FULL SCALE RANGES**

DC VOLTS: 0-6; 0-30; 0-120; 0-600; 0-1200; AC VOLTS: 0-6; 0-30; 0-120; 0-600; 0-1200; DC CURRENT: 0-120 Ag 0-3 M; 0-300M RESISTANCE: 0-30 K; 0-3 MEG DEC18ELS - 20 to +63 in 5 scoles; Copocity 50 µµ fro .01 µF; ond .001 µF to .15U; OUTPUT RANGES 0-6; 0-30; 0-120; 0-600; 0-1200.

0-120; 0-600; 0-1200.

Unbelievable Bargain, Lafayette's new multitester is a camplete factory wired and tested instrument (not a kit). It can be conveniently carried in the packet, and features unusually sensitive 10,000 ahms-per-valt AC-DC meter, 1% precision resistors, and the largest meter ever placed on an instrument of this size. Single easy-ta-use range selector switch can be appreciated by the navice and the engineer alike. Case and panel are made of durable bakelite. First capacity range requires 120 volts AC, second range requires 6 volts AC, Frobes and featible leads ore plastic coated and color coded. Size 4½ x 3½ x 1½. Camplete with leads and battery.

TE-10. Net 8.95

## NEW! REVOLUTIONARY SPECTA-RADIO®

MERCURY

ON-OFF SW. & VOL. CONTROL



ST-302

TUNING

- IDEAL FOR SPORTS EVENTS, OUTDOOR USES
- GOOD TONAL QUALITY
- ATTRACTIVE AND
- LIGHT WEIGHT **EXCELLENT FOR** SUNWEAR



- 3 TRANSISTORS PLUS GERMANIUM
- SEPARATE VOLUME AND TUNING CONTROLS
- **BUILT IN EARPHONE** JACK FOR PRIVATE

This revolutionary SPECTA-RADIO design is ideal for wearing in ball games, sports events and any autdoor settings. Previded with superior quality glare-proved sunglasses for easy viewing. Its 3-transister circuit provides high amplification, good tonal quality, and quiet operation. A smooth operating valume central permits

EXTERNAL ANTENNA JACK

easy adjustment for different listening conditions. Slide-type dial allows easy tuning. Light and attractive, it is suitable far both men and women. Complete with built-in earphone, Shpg. wt., 8 oz.

## GOLF RANGE FINDER NEW!

- PRECISION 6X LENS **MEASURES FROM 40**
- TO 250 YARDS
- HANDY POCKET SIZE
- WITH LEATHER CARRYING CASE

This exciting new Range-Finder is bound to prove an in-valuable addition to your Golfing Equipment. Featuring a precision 6X lens capable of measuring from 40 to 250 a precision 6X lens capable of measuring from 40 to 250 yords, this handy packet size instrument enables the golfer by means of a simple facusing adjustment to easily campute the distance to the next hole. Guess work is completely eliminated and choosing the carrect club is greatly simplified. Supplied with suede leather carrying case and simple instructions. Shpg. wt., 1/3 lb. F-427 Golf Range Finder

## CATALOG

## Lafayette 165-08 LIBERTY AVE. JAMAICA 33, N. Y. AXtel 1-7000 OPEN MONTHS

TILL 8:45 P.M.

NEW YORK 13, N.Y. BOSTON 10, Mass. 100 6th Ave. Worth 6-5300 Open THUR.

'til 8:45 P.M.

EXCEPT DURING JULY AND AUGUST

110 Federal St. **HUbbard 2-7850** Open MON.-WED. 'til 8:45 P.M.

## OTHER LOCATIONS

**BRONX 58, N.Y.** 542 E. Fordham Rd. FOrdham 7-8813 Open THUR. 'til 8:45 P.M.

ST-28C TRANSISTOR

NEWARK 2, N. J. 24 Central Ave. **MArket 2-1661** Open WED. 'til 8:45 P.M.

PLAINFIELD, N.J. 139 W. 2nd St. Plainfield 6-4718 Open THUR. 'til 8:45 P.M.



## NEW 299 COMPLETE STEREO AMPLIFIER

COMPLETE STEREO AMPLIFIER
Features dual 20 watt amplifiers and dual preamplifiers on one chassis. Includes a 3rd channel output for the utilimate in stereo reproduction. Has separate Boss and Treble controls for each channel; low level stereo carridge inputs for cartridges with exceptionally low outputs; Balance Control for precisely balancing both channels; Master Valume Control with loudness switch for tonal balance; Phase Reversel Switch: corrects reversed phasing on improperly made recordings; Moster Function Selector switches to: stereo records io-level or hi-level cartridges, stereo FM/AM broadcasts, use of stereo cartridge for monoural records, for a monourol source through both amplifiers. Unit is also used as a monoural electric crassaver. Inputs: 2 low-level, 2 high channel. Outputs: Tape recorder output; center channel output, and spedker impedance of 4, 8, and 16 ahms/ for each channel. Freq. Response: 20-30,000 cps. Power output per section 20 watts, 40 watts peak; Harmonic Distortions 0.8%; 1M 0.3%. 11 tubes Sizes 44% x x 15 x 12°. Sheg. wt., 35 lbs.

Net 199.95
Type C Steel Case

Type C Steel Case
Wood Case—Moh., Blande or Wal.

## **NEW SCOTT 222** 24 WATT STEREO AMPLIFIER



This is a new 24 watt Stereo Amplifier (12 watts per channel) with numerous features found only on more expensive amplifiers. Duot preemps and cantrol facilities provide camplete flexibility in the control and reproduction of all stereo or manaural sources. Outputs are available for stereo tape recording plus a third channel autput for connection to another amplifier to provide the ultimate in stereo realism. Loudspeaker output impedances are 4, 8 and 16 ohms for each channel. Inputs: 4 dual (3 high level, 1 low level) Mag High, Mag Low, Tuner, Tape Playback, Outputs: Tape Out (dual) Center Channel (single). Specifications: Frequency response; 20 to 20,000 cpt. Harmonic Distortion; less than 0.8% at 12 watts output; IM 0.3% (CCIF method); all aluminum chassis and DC on preomplifier tube headers result in a hum level of 80 db below full output. Phono sensitivity 3 mv for full output; Eige; 13½" wide x 5" high x 9½" deep. Shpg. wt., 24 lbs.

## **NEW BOGEN DB212** 24-WATT STEREO AMPLIFIER



With this "Stereo-Control Center" you can precisely control all stereo sources and feed them through the self contained dual omplifiers to your speaker systems. When you use monoural program sources you have 24 worts of power ovaliable to the speaker system. You can also feed one channel monourally through the Iweeter and mid-ronge speakers, and the other monourally through the low range speakers, Output Power; 24 waits (two 12 wait channels) peak power 48 waits. Harmonic Dissortion: 0.5% at rated output. Frequency Response: 20 to 20,000 cycles ± 1 db. Speaker Output 4, 8, and 16 ahms. Tone Controls: Bass ± 10 db at 60 cycles; Treble ± 10 db to 10,000 cycles. Controls: 4 position selector switch (tape, phona, radio, aux.); Function switch (Manaural: Channel 1, Channel 2, Channels 1 and 2; Stereophonic; normal, inverted). Volume; Bass; Treble; Hi-filter (flat, 4 kc). Lofilter (flat, 100 cps); Speaker (2 position). Power on-aff switch. Tubes: (9) two 12AXX/7/025, two 6U8, four 6V6GT, one EZ81. Dimensions; 15" W x 44" H x 12", D. For 110-120 V. 60 cycles AC. Shaps wt., 20 tbs. With this "Stereo-Control Center" you can precisely con-

BOGEN DB212—Stereo amplifier, less cabinet Net 119.95 — 12.00 Down BOGEN BEG—Peorl-gray cabinet, with legs for DB212
Net 7.50

## NEW BOGEN DB230A 60-WATT STEREO AMPLIFIER

SEPARATE BASS AND TREBLE FOR EACH CHANNEL

DUAL VOLUME CONTROLS




The ultimate in a stereo amplifier for top quality and design. With this system you can control all types of stereo and manaural program sources, and feed them through the dual 30-wast amplifiers. When you use it manaurally you have the combined 60 wasts available, with a special switching arrangement for manaural phono cartridges. Features are CPF output circuit, Phosing Switch which eliminates hale in middle effect, a provision for remote balance control. Specifications: Power Output: 30 worth 

## NEW! Jafayette 50-WATT

STEREO AMPLIFIER MODEL LA-250

Impressive Performance...Handsome Styling . . . Another Unbeatable Lafayette

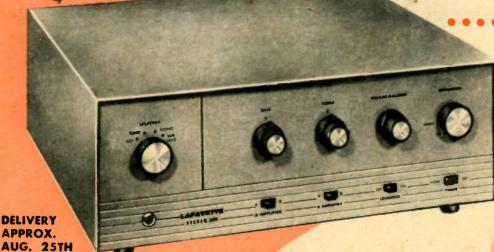


• 50 WATTS MONAURAL—25 WATTS EACH STEREO CHANNEL . RESPONSE 17-21,000 CPS ± 1 DB (at normal listening level) UNIQUE "BLEND" CONTROL . PREMIUM EL86 OUTPUT TUBES . SEPARATE BASS & TREBLE CONTROLS • CLUTCH-TYPE VOLUME-BALANCE CONTROL . 3RD CHANNEL OUTPUT

COMPLETE

Value!

COMPARABLE TO AMPLIFIERS COSTING UP TO 179.50





The Sterea 250...a completely new stereo high fi-delity amplifier with a high quality of reproduction, re-markable versatility and new distinctive styling—worthy of a place in the finest stereo hi-fi music system. A full range of controls enables you to enjoy the utmost in listening pleasure in any situation. A unique "blend" control which pravides continuously variable channel separation—from full manaural to full stereo—may be used to eliminate the exaggerated channel separation found in some stereo source material. Included is a chutch tray. Valume Relators, actival for independent of clutch-type Volume Balance control for independent or simultaneous control of both channels, concentric Bass and Treble controls which provide Independent tanal con-tral of each channel and a 4-position switch which selects phona, tuner, auxiliary or tape head stereo inputs. Simple slide switches provide channel reversal and phase reversal—or you can reproduce either channel through both amplifiers. A loudness switch permits the volume balance control to function as a compensated loudness control. The LA-250 also features a 3rd channel output which may be used to feed a 3rd single channel amplifier and speaker to provide a wider sound spread, a

Tape Output jack for recording purposes, plus dual ter-

minations for 4, 8 or 16 ohm speckers.

Advanced circultry inclures DC aperated preamp and tane cantral tube filoments for hum-free operation, premium 6CW5/EL86 push-pull output tubes, individual bios and balance adjustments on each channel and a bolonce control

PECIFICATIONS: POWER OUTPUT; 50 worts—25 per channel (speech & music rating). FREQUENCY RE-SPONSE: 17-21,000 CPS ± 1 db (at normal listening level). HARMONIC DISTORTION: less than 0.25%. IM DISTORTION: less than 0.25%. IM below roted output at full volume (high level inputs), 54 db below rated output at full volume (low level inputs). CHANNEL SEPARATION. Creates than 50 db. OUTPUTS. CHANNEL SEPARATION: Greater than 50 db. OUTPUT

IMPEDANCE: 4, 8 and 16 ohms per channel.
Attractive beige vinyl laminated steel case. Handsamely designed brass anadized aluminum front panel. Slenno brown molded legs and matching knabs with pallshed brass inserts. Dimensions with legs and knabs, 14½" w x 12¼" d x 5½" h. Shpg. Wt., 26 lbs.

LA-250 50 Watt Stereo Amplifier 8.95 down Net 89.50

## THE THE FISHER



## NEW! MODEL X-101A AND DUAL 20 WATT AMPLIFIERS

Net 199.50

Model X-101A Net 199.50 Custom cabinels for X-101A in mahagony, walnut, and blande. Sizes 15% x 12½ x 6". Shpg. wt., 6 lbs. Model 10U. (Specify finish) Net 24.95

COMPLETELY NEW! THE FISHER 600 STEREO FM-AM TUNER AMPLIFIER



Designed for those who want the convenience of an allin-one instrument, the new Fisher 600 incorporates a sterae FM-AM Tuner, Master Audio Control and a 40 Wart Steree Amplifier on one compact chassis. Dual tuning arrangements permit the use of the unit as an Individual FM or AM tuner. Input level adjustments are furnished for all input connections to the Fisher 600. The amplifier section features two well-designed 20 watt amplifiers with cannectians for 4, B or 16 ahm speakers. Features included in the Tuner: Coscode RF Stage on FM, Bridgetype law-noise triede mixer; Individual MicroRoy tuning indicators for FM and AM, Features Included in the Amplifier: 5-position input selector: 5-position Stereo-Monaphonic switch: Dual boss and treble controls; Phase Reversing switch; DC filament Supply for minimum hum; Frequency response, 25 to 20,000 cps ± 1db. Dimensions: 17" W x 14%" D x 3-13/16" M. For 110-120 V 60 Cyclet AC. Shag. wt., 42 lbs. Fisher TA-600 Steree Receiver less Cabinet Net 349,50 TA-6 Metal Cose for obave.

TA-6 Metal Cose for above

## HARMAN-KARDON "EPIC" A-250 STEREO **AMPLIFIER**



A complete stereo amplifier, with two 25 watt channels or a complete monoural amplifier of 50 watts. Specifice tilans: Frequency Response: 20 to 20,000 cps; Output level: 25 Watts per channel at less than 1% harmonic distortion, Peok Power: 50 watts per channel, Hum: 95db below 20 watts on minimum valume; Channel Separations better than 50db; Tone Control Ranges: ± 16 db at 50 cps on boss, ± 16 db at 10,000 cps on treble; Damping Factor: 8; Ponel Controls: Treble/Power, Bass, Loudness, Balance, mode (Sterea Normal, Sterea Reverse, Manaural Right, Manaural Left), Function Selector Reverse, Manaural Right, Manaural Left), Function Selector, Scrotch Filter, Contaur, 2 Speaker Selector switches and Equalization Selector. Speaker autput Impedances: 4, 8, 16 & 32 ahms. Size: 15½" W x 4%" H x 13%" D. Shag. wt., 40 lbs. Decar Panel is copper colored anadized aluminum. Cage is brushed copper with black display panel.

HARMAN-KARDON A-260 (less coge) ......Net 179.95 H-K AC-50 Enclosure .Net 12.50

## LAFAYETTE FOR LEADING STEREO COMPONENTS

## NEW! Jafayette 50-WATT COMPLETE STEREO PHONO SYSTEM

The Excitement and Realism of The Concert Hall!



## SELECT YOUR OWN CARTRIDGE



STEREO CARTRIDGE



STEREO CARTRIDGE





STEREO CARTRIDGE

(.7 MTL) DIAMOND STEREO CARTRIDGE You may substitute any of the above cortridges at no additional cost

COMPLETE

## YOUR **GUARANTEED BEST** STEREO SYSTEM BUY!

LAFAYETTE LA-250 50-WATT STEREO AMPLIFIER . . . 89.50 GARRARD RC121/11 STEREO CHANGER . . . . . . . NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE . LAFAYETTE PK-111 WOOD CHANGER BASE . . . . . . 2-LAFAYETTE SK-58 FAMOUS FREE EDGE 12" COAXIAL SPEAKERS at 29.50 . . . . . . . . 59.00

Regular Catalog Price 218.55



This superb system will add a new dimension in living to your home with all the excitement and realism of a live concert. The new Lafoyette LA-250 50-woil stereo amplifier [25 wotts each channel] forms the heart of this outstanding steren hift phonograph music system—the features, versatility and advanced circuitry of this unit are second to none—all the necessary inputs and outputs are pravided if you wish to add stereo tope and stereo FM/AM later. A unique blend control allows continuously our oble channel separation—from full manoural to full stereo. Also included is the famous Garrard RC121/11 intermix 4 speed outomatic record changer with full manual or automatic aperation supplied with your choice of stereo cortridge.—the new GE VR-22 (.7 mil) diamond stereo cortridge, Pickering 371.70 (.7 mil) diamond stereo cortridge, Shure M7D (.7 mil) diamond stereo cortridge, Supplied with the Lafayette PK-111 wood bose cut for the RC121 in your choice of finishes. These outstanding components are coupled with the 2-famous free-adge Lafayette SK-58 12" Coaxial spookers with built-in crossover network and brilliance level control. System supplied with plugs, cables and simple Instructions. Shpg. Wt., 67 lbs.

HF-681. HI-FI STEREO PMONO SYSTEM with choice of cortridge and mohagony, walnut or bland changer base (please specify). ... Net 174.50
17.45 Dawn 12.00 Monthly

HF-683. Same as HF-681, but with choice of 2-Lofayette Eliptoflex Series Bookshelf Enclosures or 2-Lofayette Cob16 Series Resonator Enclosures (please specify cobinet model and finish.) Shpp. Wt., 143 lbs. ... Net 229.95

22.79 Dawn 15.00 Monthly 
HF-684. Some as HF-681, except speakers furnished are 2-University 312, 12" 3-way speakers. Shpp. Wt. 67 lbs. ... Net 237.50

23.75 Dawn 15.00 Monthly

HF-685. Same as HF-684, but with chaice of 2-Latayette Eliptoflex Series Bookshelf Enclosures or 2-Latayette CA8-16 Series Resonator Enclosures (please specify cabinet model and finish). Shpp. Wt., 143 lbs. ... Net 294.50 29.45 Down 17.00 Monthly

HF-682. STEREO AM-FM-PHONO SYSTEM: Some os HF-687 but including the new Lotoyette LT-50 stereo tuner, Shpg. Wt., 85 lbs. Net 287-5 Down 17.00 Monthly



ALTERNATE ENCLOSURES



## harman kardon

## HARMAN-KARDON MODEL TA230 STEREO FESTIVAL COMPLETE STEREO ELECTRONIC



Here is the most complete unit ever aftered an one single chassis. A complete streophonic electronic center: dual preamplifiers with input facility and control for every stree function including the awaited FM multiplex service. Separate sensitive AM and FM tuners for simulcost streep reception. New 30 wath power amplifier [15 wath each channel] employs four af the lotest 7408 autput tuber in self-biosed push-pull circuits. Output impedance is 8 and 16 ohms. Friction-Clutch tone control put impedance is 8 and 16 ohms. Friction-Clutch tone control for bass and treble adjustments may be operated either separately for each channel or conventionally as gauged controls. B.C. heated preamplifier filoments insure freedom from hum. Silicon power supply provides superior transient response and stoble tuner performance. Frequency Response 0.546 15. stoble tuner performance. Frequency Response 0.546 15. stoble tuner performance. Frequency Response 0.546 15. stoble tuner performance. Frequency Control. Sensitivity is discriminator and automatic Frequency Control. Sensitivity is discriminator and automatic Frequency Control. Sensitivity is discriminator and automatic Frequency Control. Sensitivity is for AM and FM, new swivel high Q territe lapstick for bor for AM and FM, new swivel high Q territe lapstick for imited space (only 15-13/16" wide. 6% high, 12% deep—excluding enclasure) 15-13/16" wide. 6% high, 12% deep—excluding enclasure) block display panel.

block display panel.
Harman-Kardon TA230 (less enclosure) Net 259.95 25.99 Down Net 12.95 AC 30 Copper and Black metal enclosure
WW 30 Walnut or FW 30 Fruitwood hordwood enclosure.
Net 39.95

HARMON-KARDON MODEL "LUTE". A220 STEREO AMPLIFIER



An amplifier designed to bring quality component stereo within the reach of everyone. The "lute" incorporates to use the control of the component stereo preamps and two hum-free, distortion-free 10 watt power amplifiers oil in one handsome copper and block chassis. Peok power is 20 watts for each channel. The A220 is equally effective as a single 20 watt monoural amplifier; for these preferring to start out with one speaker with the thought of eventually enlarging their system for stereo. With the new illuminated push button on/off switch you need only set the controls ance—and simply press the button for superb performance—ond simply press the button for superb performance—ond simply press the button for superb performance—ond control, separate ganged theble and boss controls, aganged dynamic loudness control and complete stereomenoural function switch. Provided are inputs for magnetic phono, crystol or cerome phono, tuner/ouz 2 stereo tope autous receptacles and can AC convenience receptacle. Frequency response is 20.0,000 cycles 1 db of normal listening level with hormonic distortion at less than 2% of 10 watts with hormonic distortion at less than 2% of 10 watts with reachings token at 1,000 cycles. Tube compliment consists of 3.17AX7, 1.12 AUT, 4.7408. Dimensions are 14½ W x 10 ½ D x 45/16" H (excluding kmobs) Shop, wt., 14 bs.

## LAFAYETTE LT-40 DELUXE FM-AM TUNER Specially Priced — Quantity Limited




- ARMSTRONG CIRCUIT
   AFC DEFEAT
- · AUTOMATIC FREQUENCY CONTROL
- TEMPERATURE COMPENSATED OSCILLATOR
- MEETS FCC RADIATION REQUIREMENTS
- FOSTER-SEELEY DISCRIMINATOR

## **NEW! HARMAN-KARDON** MADRIGAL ST350 STEREO TUNER



This latest Harmon-Kordon unit incorporates the most recent advances in stereo-tuner circuitry. The AM and FM front ends are completely separated for AM/FM simulcast (stereo) reception. Each section has its own highly efficient electronic bor tuning indicator and with the exception of the tuning function the instrument is operated entirely by push-buttons. Looking toward the future, Hormon-Kordon has provided for direct chossis installation of the MA350 Multiplex Adapter. FM section employs an Armstrong circuit with zero time constant Gated Beam Limiter, Foster Seeley Discriminator, Automatic Frequency Control and Cathade Fallower Output. Sensitivity of 0.95 microvolts for 20 db quieting, 1.9 microvolts for 30 db permits reception of the most distant FM stations. AM circuitry incorporates an exclusive note filter for noise-free long distance reception, separate AVC circuit, 10kc whistle filter, two broad band If stages, and law noise. High Goin RF Pentade followed by a Pentagrid conver.er, included is a built in Ferrite Loopstick with law Impedance terminal for external antenna. Finished in attractive brushed capper with black display panel. Dimensions are 15% W x 4½ "H x 12½" D. Shpg. wt., 26 bs. terminal for external brushed copper with block display pone; 15% "W x 4%" H x 12%" D. Shpg. wt., 26 lbs. HARMAN-KARDON 57350 AM-FM STEREO TUNER Net 199.95 Net 12,50

## MULTIPLEX ADAPTER HARMAN-KARDON MA350 COMPATIBLE STEREO



The MA350 is a plug-in stereo adopter designed expressly for use with the ST350 tuner to provide reception of the new Crosby compatible FM stereo broadcasts. Specifications are essentially the same as the MX20 multiples adapter, the difference being the MA350 mounts easily within the tuner enclosure with signal and power requirements sup-

plied by the funer.

HARMA N-KARDON MA350 MULTIPLEX ADAPTER

Net 49.95

## HARMAN-KARDON MX20 SELF POWERED MULTIPLEX ADAPTER




This extremely stable unit is designed for use with tuners which do not provide space and power supply for "Polygin" adopters. Completely self powered the MXZO easily plugs into any tuner with multiplex facilities. When switched to Multiplex [if an MXZO adapter is connected] the compatible stereo broadcast will be heard in full stereo. A convenient stereo dimension control located on the front escutcheon is provided for adjusting the degree of stereo to optimum. SPECIFICATIONS; Output Level volt, Input Level 30 millivolt. Distortion 1.% total hormonic distortion maximum, Noise Level —60 db, Crosstolk —40 db and frequency Response 1 db 30 to 15,000 cps. Tube compliment 1-EZ-80, 3-12AUT, 1-12XT, 2-1N34 crystal diades. Supplied less cage, dimensions are only 10"W x 5"H x 6"D. Shpg. wt., 12 lbs. HARMAN-KARDON MX2O SELF POWERED MULTIPLEX Not 69.95 This extremely stable unit is designed for use with tuners

MC-20 CAGE FOR ABOVE

## NEW REVOLUTIONARY HIGH-FREQUENCY SPEAKER

## THE NEW LAFAYETTE Sphericon


HIGH FREQUENCY SUPER TWEETER

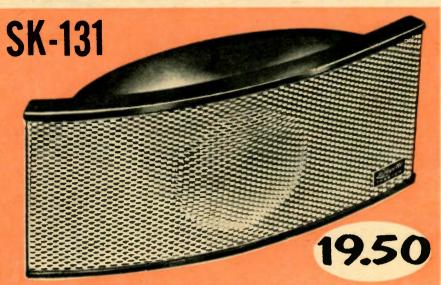

At long last the breakthrough in High-Frequency Speaker cleancy units this is disastrous, as an already inefficient design. Here is a tweeter with unequalled performance, engineered for todays high compliance stereo speaker systems. The Ladgette Sphericon represents a complete conduction with no lose in speaker efficiency. As a departure from Electrostatic tweeters, which are extremely inefficient — indeed so much so that it is aften necessary time, Equipped with a built-in 3000 cycle crossover not work the Sphericon produces a smaath linear response tweeter praperly, thereby lowering the efficiency of the same level as that af the Electrostatic to the same level as that of the Electrostatic to the same level as that of the Electrostatic designed damed phenolic diaphragm delivers.

THE MOST SIGNIFICANT ADVANCE IN TWEETER DESIGN OF THE STEREO AGE

- FREQUENCY RESPONSE FROM 3,000 CPS TO BEYOND 40,000 CPS.
- UNIFORM DISPERSION OVER 120° IN ALL DIRECTIONS
- . UNIQUE DOMED PHONELIC DIAPHRAM
- . POWER CAPACITY 30 WATTS
- REQUIRES NO HIGH VOLTAGE OR POWER SUPPLY



## ELECTROSTATIC 3 ELEMENT TWEETER

WAS 27.50 NOW ONLY



SK-150 Mahogany Finish SK-151 Walnut Finish SK-152 Blande Finish (Please specify finish)

Net 17.50

## RECOMMENDED

INSTALLATION ACCESSORIES Select crassaver networks and L pads to match impedant

## CROSSOVER NETWORK KITS

## LAFAYETTE "L" PAD ATTENUATORS

## NEVER BEFORE AT THIS SPECIAL LOW PRICE

LAFAYETTE SK-132 12" COAXIAL SPEAKER



CHECK THESE FEATURES!

Built in electronic cross-over with level control. Superior shallow curved farm woofer cone. New curved cor-rugated tweeter cone.

- EXTREMELY FLAT FREQUENCY RESPONSE FROM 35 TO 16,000 CPS.
- WOOFER FREE-AIR CONE RESONANCE OF 40 CPS.
- 11/2 LB. MAGNET WEIGHT.
- ABSOLUTE MINIMUM DISTORTION
- HANDLES 20 WATTS OF CONTINUOUS POWER.
- · PERFECT FOR STEREO

Mere is one of the greatest speaker values Lafayette has ever affered. Manufactured of the finest materials—clean, crisp response down to the lowest frequencies with the wooter cane utilizing a shollow curved form thereby preventing deteriorotion of its superior characteristics resulting from sustained usage. The sturdily built voice coil is made with fluoric bonding agents and easily withstands high peaks. By mounting the tweeter slightly off center of the wooter, interference between the two ore eliminated. Impedance: 16 ohms. Shgs. wt., 13 lbs.

## NEW! LAFAYETTE SK-130 8" EXTENDED RANGE HIGH-FIDELITY SPEAKER



- FREQUENCY RESPONSE 40 TO 18,000 CPS.
- 15 OUNCE HIGH EFFICIENCY
- . FLUX DENSITY 13.000 GAUSS
- . I" VOICE COIL

Made with typical British craftsmanship—this is one of the sweetest,
smoothest sounding 8" speakers we
have heard. A 15 ounce Alcomax
ring magnet plus a hyperbolic cone
are utilized to make it ideal for use
as extension or midrange speaker—
or utilizing two—just the thing for
stereo. Capable of handling a full 15 Walts of power and
has a voice coil impedance of 16 ohms. Shpg. wt., 3 lbs.

SK-130 8" EXTENDED RANGE SPEAKER ...... Net 11.95



## COMPRESSION HORN TWEETER WITH 2 or 3 WAY CROSSOVER



Versatility is the byword in this

combination of the famous Lafayette SK-105 tweeter and LN-7 of
the period of the famous Lafayette SK-105 tweeter and LN-7 of
the period of the famous Lafayette SK-105 tweeter and LN-7 of
the period of the function of permits mounting on top of the specker enclosure or, optionally, within the enclosure. Impedance 8-16 ohms. Shap, wt., 5¼ lbs.

Shpg. wt., 5% lbs.
5Y-364—Combination Tweeter and Crossover System
Net 16.50

LAFAYETTE Sphericen TWEETER
AND ACOUSTIC RESEARCH AR-2 SPEAKER SYSTEM COMBINATIONS AT MONEY SAVING PRICES

SPHERICON EXTENDS THE RESPONSE OF YOUR AR SPEAKER TO BEYOND 40,000 CPS

AR-2 10" Acaustic suspension speaker and tweeter as and AR-2 Walnut Finish Net 103.00 sembly; 42-14,000 cps. ±5 db; Size 13½" k 11" x 24".

Shpp. wt., 52 lbs.

SY-339—Cansists af Lafayette SK-131 Spherican Tweeter and AR-2 Karina (Bland) Finish Net 113.50 and AR-2 Mahagany Finish Net 98.60


SY-340—Consists of Lafayette SK-131 Spherican Tweeter Lafayette SK-131 Spherican Tweeter Net 92.65



- . FOR BOTH STEREO & MONAURAL
- FREQUENCY RESPONSE 35 TO 18,000 CPS
- UNIQUE 8" WOOFER-MIDRANGE ASSEMBLY
- COMPRESSION HORN TWEETER
- . 6 DB PER OCTAVE ELECTRONIC CROSSOVER WITH LEVEL CONTROL
- SOLID 3/4" VENTED DUCT PORT BOOKSHELF ENCLOSURE

"Tricette"—The perfect blending of attroctive bookshell cabinetry and advanced oudio design (years ahead of other engineering efforts along these tines). The exceptional smoothness and cleanliness of the bass and midronge is the product of a unique 8" woofer-midrange speaker design employed in a solid 3" acoustically lined vented duct port enclosure. Two seporate cones are coupled through a common voice coil, with the outer edge of the midronge cone ottached and flooting on the flexible corrugated edges of the woofer cone. This results in a mechanical crossover with an absolute minimum of distortion, to that both cones operate in phase at low frequencies, but only the midrange cone transmits the midrequencies. The heavy magnets provide high efficiency and excellent transient characteristics. Smooth extended high frequencies are brilliantly reproduced by use of a com-

pression harn tweeter utilized with an electronic crossover and level cantrol provided for balancing the system according to individual listening tastes. Impedance 8-16 ohms. Integrated power handling capacity 20 Wats. Dimensions: 23" W x 11½" H x 11½" D. Complete with easy to follow speaker installation instructions. SY-353 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM MAHOGANY FINISH Net 42.50—only 4.25 DOWN SY-355 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM MAHOGANY FINISH Net 42.50—only 4.25 DOWN SY-356 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM WALNUT FINISH Net 42.50—only 4.25 DOWN SY-356 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM SY-356 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM ST-356 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM ST-357 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM BLONDE FINISH Net 42.50—only 4.25 DOWN SY-357 "TRIOETTE" BOOKSHELF SPEAKER SYSTEM BLONDE FINISH Net 42.50—only 4.25 DOWN



## **NEW! 6%" COAXIAL SPEAKER**

- . FOR EXCELLENT HI-FI SOUND . ECONOMICAL & A SPACE-SAVER FOR STEREO
  - RESPONSE 50-16,000 CPS! BUILT-IN CROSSOVER NETWORK

. LARGE, HEAVY MAGNETS

An excellent speaker, with all the best features of coasial design, especially recommended for use in stereo high fidelity systems where space and/or cast are factors. The 6½" woafer is provided with extro-heavy large magnets for good power sensitivity and low distartion; the 2" tweeter is separate speaker coarially mounted in a housing which completely seals off back radiation and with a mesh discontinuous provides smooth, wide angle dispersions.

contributes to the overall smooth tonal response of 50-16,000 cps. Woofer resonance is 70 cps; voice coil impedance is 8 ohms. Calor-coded, screw-type terminals. Requires 5%" diameter cutaut. Mounts with 4 equally-spaced holes. Size is 6½" diam., 3%" deep. Shpg. wt., 3½ lbs.

SK-97 61/1" COAXIAL SPEAKER






ONLY

## NEW! LAFAYETTE SPACE SAVER SPEAKER ENCLOSURE

ONLY 9.95

EACH

COMBINATION



. THE IDEAL REMOTE SPEAKER

. FITS INTO BOOKSHELF Only coreful Lafoyette planning can result in such a of speaker. Completely en hondy enclosure priced so towl A beoutlfully built cob-Only coretul Lardyette planning can result in such a hondy enclosure priced so love! A beoutfully built cobinet with smooth, shining finish available in mohagan, walnut ar striking blande, this enclosure will match any type of room decor. Ruggedly constructed of %" wood sides, top and bottom %" wood frant and bock. Sturdy enough to withstand even very high valume levels without vibroting. This handsame enclosure has a thousand and one uses. These units make the ideal two or three-channel stereo system or can be used to supplement existing speakers either as the second channel speaker, or as a center stereo speaker for better bolance. Ideally suited as the remale speaker in stereo table-madel phonographs. Although meant primarily for stereo use, this enclosure can, af course, be used wherever a small hi-fi speaker is desired. Anywhere you use it, you will find its appearance just right. Put it on a bookshelf in the library, on a table or a cobinet in the den or living room, even mount if on the wall. One of the three finishes will match any room. Takes a 6" or 6%" speaker far optimum reproduction of both lows and highs, has a small port for port-loading

speaker sound better. Only 9½" high, 14¾" long, 8" deep. Rubber feet protect other furniture. Shop. wt., 12 tbs.

CAB-31—Speaker enclosure, consider and consider

SPECIAL PRICE

ELIPTOFLEX Brought To You By Lafayette Research—
Engineered To Set A New Standard Of Speaker Enclosure Excellence

• NOW IT IS POSSIBLE TO HAVE ALL THE ADVANTAGES OF A HIGH EFFI-CIENCY SPEAKER IN A BOOKSHELF SIZE ENCLOSURE . NEWLY DESIGNED ELIPTICAL PORT BROADENS FREQUENCY RESPONSE AND PROVIDES BETTER TRANSIENT RESPONSE • NEW DIFFRACTING RING ELIMINATES CANCELLA-TION EFFECTS BETWEEN FRONT AND REAR RADIATION

## **NEW! LAFAYETTE**



SK-127 12" COAXIAL **SPEAKER** WITH DUAL WIDE- ANGLE **TWEETERS** 

FREQUENCY RESPONSE
 40-16,000 CPS
 HIGH QUALITY
 SEAMLESS CONE
 BUILT-IN CROSSOVER
 NETWORK WITH
 BRILLIANCE LEVEL CONTROL
 HEAVY DUTY CONSTRUCTION

This speaker must be considered as one of the foremost High-Fidelity values today. Its tonal quality and features equal that of speakers many times its price. The wooder section is constructed at a one piece seamless cone with 1½" vaice call set in a rigid non-resonant frome. Employing a unique dual cone wide-angle tweeter assembly (approximately 125° horizontal dispersion angle) which electrically crosses over at 2500 cycles. A brilliance level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level and the provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level and the provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to vary tweeter level control is provided making it possible to the provided making it possible to the provided making it possible to the possible to the provided making it possible to the provided making it possible to the possible to the provided making it 8 ohms. Shpg. wt., 8 lbs. 5K-127 12" COAXIAL SPEAKER

## SPECIAL COMBINATION



Naw you can obtain what is conceded to be the greatest performance value on the hi-fi market—and save up to 29.50. Available with either SK-111 15" 3-way speaker with 1% lb, magnet or SK-113, a-way with 3% lb, magnet. These are both highly efficient integrated 3-way speakers made by world renowned Goodmans of England. Supplied complete with genuine 12 ab/actave crossover network with L-pad high frequency level control.

The enclosure is the renowned Lotayette boss reflex in either highboy or lowboy stying and in a chaice of monogany, walnut or blande. Solidly constructed of Mistock, these units have picture frame moldings, attractive plostic grilles, topered legs, bross ferrules, internal acoustic linings, and are finished in genuine wood veneers. Size of lowboy (less legs) 28%" w x 231%" h x 16%" d. Some size for highboy with height and width interchanged.

WHEN ORDERING, SPECIFY CHOICE OF BOTH: STYLE — HIGHBOY OR LOWBOY FINISH—MAHOGANY, BLONDE, WALNUT

SY-281 SK-111 15" with 1% lb. magnet 3-WAY
SPEAKER & ENCLOSURE COMBINATION—Net 89.50 Only 8.95 Down
\$Y-338 \$K-113 15" with 31/2 lb. magnet 3-WAY
SPEAKER & ENCLOSURE COMBINATION—Net 99.50

## 

## **ELIPTOFLEX**

THE PROBLEM: With the advent of stereo, the use of two mossive unwieldy speaker systems become unfeasible in most of today's combination living room—music room area. One answer to this problem was the dir-light bookshelf speaker systems of which there are many excellent variations, However this design is inherently Inefficient and requires costly high wottage amplification. THE SOLUTION: The "Eliptofies" is the latest development from Lafayette's acoustic laboratories, it is the result of an intensive research program to develop a backshelf enclosure that may be utilized with any efficient 12" full range, coaxial or triavial speaker. If may also be used with a 12" woofer, separate tweeter and crossaver. Utilized with a proper speaker the "Eliptoflea" achieves a deglee of natural smoothness coupled with low distortion and or tick, robust bass hitherto found only in large speaker consoles or inefficient bookshelf systems many times in price powered by large amplifiers. With the "Eliptofleat" there is no need for costly high woltage amplifiers. With the "Eliptofleat" there is no need for costly high woltage amplifiers.

tribute to the excellence of the "Eliptoflex" performance one, the elliptical part, and two, the diffracting ring. The laudspeaker is mounted on a boffle recessed in the cabinet shell with the front-place extending partially ocross the front surface of the boffle. forming ducts or tubes from the port openings to the outside air. The elliptical vilout changes the effective length of the duct across its area. This variation in path lengths provides on extremely amonth transition from duct to free air proaders the frequency response at which it is effective and provides better transient response. Mixing the front and reor radiation from the laudspeaker diaphragm in this manner produces a truly coaxial presentation over the complete frequency spectrum. The tonal unity is such that no separation of source can be defected between high, middle and low frequencies. A triangular shaped diffracting ring mounted on the front of the baffle board virtually elinates undestrable concellation effects normally produced by clase coupling of front and reor cone radiation. The result is a "lens" effect, changing relative particle velocities and consequently, phase relationships so as to produce a smooth transition from front to rear radiation.

Comparative laboratory and listening tests indicate that "Eliptoflex" performance is demonstrably superior throughout the oudlo spectrum.

The "Eliptoflex" is beautifully finished in a variety of hordwood veneers for attractive room placement. Dimensions are 14" Hz 23-7/16" Mx 13-5/16" D.

CAB-41WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (enlug) Shape wt., 24 lbs. Net 32-50

CAB-42WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (blande) Shape wt., 24 lbs. Net 32-50


CAB-43WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (blande) Shape wt., 24 lbs. Net 32-50

CAB-52WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (blande) Shape wt., 24 lbs. Net 32-50

CAB.-43WX "ELIPTOFLEX" BOOMSHELF ENCLOSURE
(blonde) Shpp. wt., 24 lbs. Net 32.50
CAB.-52WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE
(biled walnut) Shpp. wt., 24 lbs. Net 32.50
CAB.-44W SET OF WOOD RUNNER FEET FOR CAB.-41
Net 1.45

CAB-45W SET OF WOOD RUNNER FEET FOR CAB-42 CAB-46W SET OF WOOD RUNNER FEET FOR CAB-43







STOCK # ENCLOSURE SPEAKER



D3WX D4WX D5WX	CAB-42WX CAB-43WX CAB-52WX	LAFAYETTE- SF-58W	62.00	59.00 ea. 115.00 for 2
OFWX OFWX OFWX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	LAFAYETTE- GOODMANS SK-110WX	80.00	79.50 ea. 153.00 for 2
IOWX IIWX I2WX I3WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	LAFAYETTE- GOODMANS SK-112WX	102.00	97.50 ea. 190.00 for 2
14WX ISWX I6WX I7WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	LAFRYETTE- GOCOMANS SK-114WX	112.00	109.50 ea. 210.00 for 2
XW8	CAB-41WX	UN VERSITY	104.04	89.50 ea.

STOCK #	ENCLOSURE	SPEAKER	REG. PRICE	SPECIAL PRICE
Y-320WX Y-321WX	CAB-43WX CAB-52WX	UNIVERSITY 312	104.04	89.50 ea. 173.00 for 2
Y-322WX Y-323WX Y-324WX Y-325WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	UNIVERSITY UXC-122	67.29	59.95 ea. 113.00 for 2
Y-326WX Y-327WX Y-328WX Y-329WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	JENSEN H223F	105.00	89.95 ea. 175.90 for 2
Y-330WX Y-331WX Y-332WX Y-333WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE 12TRXB	97.18	82.50 ea. 159.00 for 2
Y-334WX Y-335WX Y-336WX Y-337WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE SP12B	66.80	59.95 ea. 113.00 for 2











## NEW! LAFAYETTE SK-125 HI-COMPLI-ANCE 3-WAY SPEAKER SYSTEM

8" Woofer - 61/2" Mid-Range 21/2" Tweeter



- HIGH COMPLIANCE SPEAKERS
- VARIABLE BALANCING CONTROL
- FREQUENCY RESPONSE FROM BELOW 35 TO 18,000 CPS
- SOLID VENTED, DUCTED-PORT TYPE ENCLOSURE
- PERFECT FOR STEREO

Lafavette has succeeded in achieving a standard of performance formerly associated only with very large speaker 3-way speaker system rates advanced Hi-Compliance speaker design in an extra rigid vented, ducted-port type enclosure, lined throughout with acoustic material. The natural, full bass, faithful mid-range and clear sparkling highs are startling from a speaker system of such small proportions. Employing a 3-way LC crossover network with a variable 10-position balancing control, it is possible to match the speaker system to individual room acoustics and listening tastes. Frequency response is from below 35 to 18,000 cps. with a power handling capacity of 25 watts, Impedance 8-16 ahms. Finished on all 4 sides in attractive hand-rubbed mahagany or walnut veneers (please specify). Dimensions are 24"W x 11"H x 10"4"D. Shpg. wt., 26 lbs.
SK-125 HI-COMPLIANCE 3-WAY SPEAKER SYSTEM SET OF 2-SK-125 SPEAKER SYSTEMS FOR STEREO



Only 4.95 Down . . . 5.00 Monthly Only 9.80 Down B.00 Monthly

Not 49.50 Net 98.00

## A SMALL MIRACLE FROM LAFAYETTE — THE NEW SK-124 ULTRA-COMPLIANCE MECHANICAL 2-WAY SPEAKER SYSTEM

- FREQUENCY RESPONSE 40-16,000 CPS
- ESPECIALLY DESIGNED VENTED, TUNED, DUCT TYPE ENCLOSURE
- UNIQUE MECHANICAL 2-WAY SPEAKER WITH EXTRA HEAVY MAGNET
- EXCELLENT FOR STEREO



OUTPERFORMS SPEAKERS DOUBLE LAFAYETTE'S LOW PRICE



SK-124 MECHANICAL 2-WAY SPEAKER SYSTEM Specify SET OF TWO SK-124 SPEAKER SYSTEMS FOR STEREO



Lofayette has indeed wrought a small miracle in engi neering such acoustic excellence into so small a package. Smooth, distartion free response with a deep fundamental

Smooth, distortion free response with a deep fundamental bass and clean pure highs that give no indication of its small size and price. The perfect speaker for that high quality installation in your home, affice or restaurant—two are ideal for stereo.

The speaker features unique dual cone construction with extra heavy magnets. Both tweeter and woofer "float" on flexible, corrugated edges with the auter edge of the tweeter cane attached to the mid-section of the woofer cone. This results in a mechanical crossover so that both cones operate in phase at low frequencies, but only the tweeter cane approved the provided of the mid-section of the woofer cone. This results in a mechanical crossover so that both cones operate in phase at low frequencies. The same type of wide-range frequency response normally found only in true coaxial or multiple speaker systems is provided. Frequency response of 40:10,000 cps. Impedance 8:16 ohms. Cobinet is finished on 4-sides in hand-rubbed mohogony and walnut for attractive horizontal or vertical placement anywhere in the room. Dimensions are 10% M x 18-7/16"1 x 8-7/16"D. Shpg. wt., 15 lbs.

Only 3.40 Down - 5.00 Monthly

## AN EXCITING NEW SPEAKER DEVELOPMENT

## **OUTSTANDING VALUE!** LAFAYETTE AUDIO CABLE ASSEMBLIES



A high quality single conductor shielded cable consisting of a straight molded RCA type phone plug at one end with stripped and tinned terminators at the other end. Perfect for interconnecting phonographs, tuners, amplifiers, and high Impedance microphones.

MS-573 36" RCA type phono plug to stripped and MS-574 48" RCA type phono plug to stripped and .Net .36

MS-579 60" RCA type phono plug to stripped and M5-576 72" RCA type phono plug to stripped and

M5-577 144" RCA type phono plug to stripped and

SALE!



- MOLDED FROM HI-IMPACT PLASTIC
- BRASS SCREW AND SHAFT INSERT
- ACCEPTS UP TO 1/4" ROUND OR FLAT

You'll want these trim distinctive, functionally styled knobs You'll won't these frim distinctive, functionally styled knobs to odd a custom or professional appearance to your MI-FI, Mam, Test and Experimental Equipment, Finished in an attractive steel groy and molded from tough hi-impact plastic, the knob is of cylinder design with sure-grip fluted sides and on aluminum ring-set in a recessed face. Rugged brass screw and mounting shoft insert will accept up to 1/4" round or flat shaft. Each kit contains 5 knobs.

KI-55 Size: 1%" Digmeter %" Deep Net .89 K1-56 Size: 1%" Diameter 11/16" Deep Net .79

KI-S7 Size: 1" Digmeter 11/16" Deep Net .69

## LAFAYETTE SCOOPS THE TAPE RECORDER INDUSTRY THE NEW LAFAYETTE

## **RK-103 DUAL SPEED** TAPE RECORDER

PROFESSIONAL QUALITY AT A PRICE YOU CAN AFFORD!




## afayette Presents

## THE NEW ULTRA-LINEAR SK-128 **FULL RANGE 8-INCH DUAXIAL** SPEAKER WITH NEWLY DEVELOPED TWEETER BAFFLE DESIGN.

■ 40 TO 16,000 CPS—FLAT WITHIN 3 DB ■ HIGH EFFICIENCY - HIGH EXCURSION WOOFER WITH UNIQUE "CONICAL STIFFENER" # HANDLES HEAVY BASS PASSAGES WITHOUT "DOUBLING"

Eccentric Tweeter Mounting & Unique Elliptical **Baffle Completely Eliminates Interaction** Between Woofer & Tweeter

The SK-128 combines the best features of a multiple speaker system in one compact and economical unit. It affects full, even coverage of the entire audible range, with na distartion or coloration to mar your listening pleasure. The specially freaded woofer cone has a unique "Conical Stiffener" at the apex which, coupled with Its high compliance, enables the cone to operate in a piston-like manner—delivering a clean, powerful boss response. The 2-inch tweeter has its own voice call and magnetic field. Special treatment of cone and cane edge provides even distribution of the high frequencies, with no peaks or resonances. The unusual off-center mounting of the tweeter and its eliptical baffle minimizes interaction between tweeter and its eliptical baffle minimizes interaction between tweeter and evoder and insures an overall response free of intermodulation distartion. Electrical crossover from the woofer and insures an overall response free of intermodulation distartion. Electrical crossover.

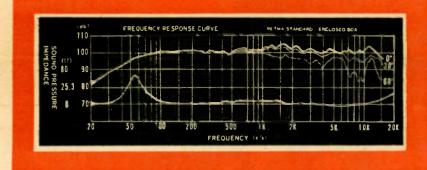

## LAFAYETTE MINI-DUCT BOOKSHELF ENCLOSURE WITH SK-128 8" ULTRA-LINEAR SPEAKER

The perfect answer for those who demand realistic sound reproduction even where space is limited

The of their systems die taset in theire.	
SY-343WX Speaker System In Walnut	Net 39.50
SY-344WX Speaker System In Mahagany	Net 39.50
SY-345WX Speaker System in Blande	Net 39.50
SY-346WX Speaker System in Oiled Walnut	Net 39.50
SW 347WW Coacher system in unfinished hirch	Net 37.50



TWEETER BAFFLE

**CROSSOVER NETWORK** 

CONICAL STIFFENER

19.50

- PUSH-BUTTON CONTROLS DUAL SPEED TWIN SPEAKER
- TAPE INDEX COUNTER WIDE RANGE FREQUENCY RESPONSE
- SIGNAL TO NOISE RATIO BETTER THAN 40 DB
- . WOW AND FLUTTER LESS THAN D.35%

Lofayette has ill We are not at liberty to divulge the nationally famous name of this instrument's manufacturer, however, we are confident that its features will speak for themselves—rugged fool proof push-button controls for play, record, rewind, farward and stop. Automatic interlocked switching makes it impossible to accidentally erose, spill, or break tape. Dual speeds—7½ and 3½ jps. Record level indicator to facilitate recording. Fast forward and rewind—1200" in 80 seconds. Accepts 7" reel size. Twin

## 20,000 OHM PER VOLT MULTITESTER

- 20,000 OHMS PER VOLT DC SENSITIVITY
- 10.000 OHMS PER VOLT AC SENSITIVITY
- 40 MICROAMPERE 3" D'ARSONVAL METER

MOVEMENT • HIGH INPUT ON ALL DC & AC RANGES

ONLY 13.50

A new multitester with extro-luxury features, at a down-to-earth price. Mere is the ideal all-purpose multitester for trouble-shooting. Uses a sensitive, rugged 40 micro-ampere bosic meter, a d'Arsonvol movement with jewelled bearings. Input resistance 20,000 ohms per volt on DC, 10,000 ohms per volt on AC. 1% tolerance resistars. Single knob selector swifth greatly simplifies aperation. Break-proof zero-ohms knob permits easy adjustment. Measures 0-10-50-250-500-1000 DC volts, 0-10-50-250-500-1000 AC volts, 0-10-50-0500 micro-amperes, 0-10-250 miltiamperes, —20 to +36 decibels, PLUS two special ranges 0-5000 henrys inductance and 250 mmf to .02 mfd copacity. Size 31% x 5% x 11%. Shpg. wt., 3 lbs.



## STEREO AUDIO **ANALYST SINGLE** NEEDLE—DUAL CHANNEL VU BALANCE METER

UNIQUE TWO COIL GALVANOMETER TYPE PRECISION METER MOVEMENT . SEVEN RANGES OF METER SENSITIVITY • EFFORTLESS BALANC-ING OF STEREO SYSTEMS • PROVISION FOR USE AS VU METER AND TAPE RECORDER LEVEL INDICATOR - - MAXIMUM METER SENSITIVITY

The TM-66 provides the solution to all stereo balancing problems. This unique precision meter movement utilizes 2 separate coils set in a single magnetic field. Each stereo channel feeds a separate coil through a full wave bridge rectifier. When both signals are equal and balanced the resultant deflection on the scale will measure 0. Unlike conventional stereo indicators having two unrelated movements, collibration of one meter against the other (channel A vs. channel B) is unnecessary. Since the two separate coils letered with the convention of the second statements and the second statements. ments, collibration or one meter against the other (connect A vs. channel B) is unnecessory. Since the two separate calls interact within a single magnetic field, the single needle movement acts upon channel A and channel B simultaneously, automotically maintaining the unit in con-stant calibration. Individual channels may be measured by

means of the two slide switches. An extremely stable meter action and protection from peak voltages is provided by special damping networks. Since the unit is in continuous calibration the need for Individual range controls are ellminated. The single seven step range control serves for both channels and facilitates the use of the meter with all 

## NEW GENERAL ELECTRIC STEREO AMPLIFIERS



## MODEL MS-2000 "STEREO CLASSIC" 28-WATT STEREOPHONIC AMPLIFIER

28-WATT STEREOPHONIC AMPLIFIER
This integrated stereo amplifier combines high quality stereo performance with striking cabinet design. Consists of 2 power amplifiers and 2 preamp control units on a single chassis. Front panel controls include: Input selector—stereo tape head, monaural phono, stereo phono, stereo tuner, auxiliary; Speaker mode selector-stereo, channel reverse, monaural; Volume; Contour; Balance; Bass; Treble; Rumble filter; Power on-off; Tuner level set. Inputs (with sensitivity ligures): Stereo Cartridge (3.5 my); Stereo tape head (3 my); monaural cartridge (3.5 my); Tuner (200 my); Auxiliary (200 my). Outputs: Dual speakers—4, 8, 16 ohms; Dual output jacks; 2 a.c. outlets, one controlled. Power Output: 28 watts total, 14 watts per channel in stereo operation. Frequency Response: 20 to 20,000 cps ± 0.5 db. Harmonic Distortion: below 1% stereo operation, at full output. Hum and noise:—55 db (phono); —73 db (high level). Channel Separation: at least 40 db between 30 and 20,000 cps. Tubes: 2-7025/12AT7; 2-12AXT7, 2-6BABA; 4-6V6GT, 1-5V4GA; 1-full wave selenium rectifier. Cabinet finished in leather grain willow gray vinyl, Front panel features a silver and willow gray color finish. Size, 15x12x5/ye". For 110-117Y, 60 cps AC. Shpg. wt., 15 lbs. Model MS-2000



## MODEL MS-4000 "STEREO CLASSIC" 40-WATT STEREOPHONIC AMPLIFIER

Model MS-4000 Net 176.35
Model MS-4010 Same as MS-4000 but with cabinet finished in saddle-brown vinyl and panel in brown and gold.
Net 176.35



## MODEL RG-1000 "STEREO CLASSIC" REMOTE CONTROL UNIT

Provides the important stereo central remote control functions of channel balance and volume control—up to 30 feet from the controlled amplifier. Ideally suited for use with the GE MS-4000 or MS-2000, or as a remote volume control with a monaural amplifier, or for volume and balance control with a pair of monaural amplifiers used for stereo. Superb styling with ebony-finish base and knobs, textured aluminum face plate, and chrome trim. 5½" w x 2¼" d x 1¾" h; with 30-foot output cable. Shop. wt. 2½ fibs.  $5\frac{1}{2}$ " w x  $2\frac{1}{4}$ " d x  $1\frac{1}{6}$ " h; with Shpg. wt.  $2\frac{1}{2}$  lbs. GE RG-1000 Remote Stereo Control

## NEW GENERAL ELECTRIC FM-AM TUNER MODEL FA-12



The new GE Model FA-12 FM-AM Tuner offers an unusual combination of excellent audia performance and trim, highly-compatible appearance design, for use with virtually any amplifier in a custam high flidelity system. This tuner features high sensitivity, precision tuning, ability to receive weak signols with minimum distortion, and an unusually low hum and noise level. Frant Panel Controls Tuning (flywheel), Selector switch with Off, AM, FM, FM (AFC) positions. Specifications: AM Sensitivity-200 µV per meter for 20db signal-to-noise ratio; FM-5µV for 30db quieting. AM Selectivity—Tkc bandwidth, 6db down; FM Distortion—less than 1.5% hormonic at rated autput—less than 2% [M. Naise—FM, 55db below 100% modulation—AM, 45db below 100% modulation—AM, 45db below 100% modulation. Response—FM, ± 2db of the standard de-emphasis curve; AM, 23db down at 10kc to minimize whistle interference. Audio Outputs—3 Low-impedance cathade follower type; 1 high, 1 low, 1 Multiplex. Antenno Inputs—FM, 300 ohm (folded dipole antenno supplied); AM, built-in ferrite rad antenno, terminal for externol antenno. Them. The content tuning Meter—Dual purpose for precise FM center tuning and AM maximum signal tuning. Overall dimension—15-1/32" W x 5½" M x 10½" Condition and condition of the follower of the condition of the condition of the follower of tuning and AM maximum signal tuning. Overall dimension—15-1/32" W x 5½" M x 10½" Condition and condition of the follower of the follower of the follower of the follower of tuning and AM maximum signal tuning. Overall dimension—15-1/32" W x 5½" M x 10½" Condition and condition of the follower of tuning and a follower of tuning and a follower of tuning and a follower of tuning and follower of tuning and AM maximum signal tuning. Overall dimension—15-1/32" W x 5½" M x 10½" M x 5½" M x 5½" M x 10½" M x 5½" M x 5½" M x 10½" M x 5½" M x 1

60 cycles AC,
Model FA-12 (willow gray vinyl cabinet with gray and
silver faceplate).
Not 129.95
Model FA-10 (saddle brown vinyl cabinet with brown and
cold faceplate).
Not 129.95

## "COMPATIBL STEREO and PHONO MUSIC SYSTEM LP MONAURAL

Plays Stereo and Monaural Records

## MAFAYETTE SUPER-VALUE HIGH FIDELITY "TWINS"







## NEW! FM TUNER 47-50 WITH CAGE Ready for Stereo!

ONLY 5.00 DOWN - 5.00 MONTHLY

■ MULTIPLEX OUTPUT FOR FM MULTIPLEX STEREO ■ NEW EMBO/6BR5 "PIN-POINT TUNING" EYE . FULL ARMSTRONG FM CIRCUITRY . DRIFT-FREE AUTO-MATIC FREQUENCY CONTROL . 44V FM SEMSITIVITY

An autstanding new FM tuner designed to receive standard FM or FM multiplex stereo with a high degree of sensitivity for "pulling in" even distant stations with excellent "quieting" and with good selectivity for reporating strong local stations with excellent "quieting" and with good selectivity for reporating strong local stations and weak distant stations. Has a multiplex output lack, ready for use with a multiplex decader (when available) for FM multiplex stereo. Can be used for standard FM reception, or with your AM radio for AM/FM stereo, or 2 units can be used for FM/FM stereo (which promises to be a not-too-distant development). Features include: SENSITIVITY: Amicrovalts for 20 db quieting, 7 µv for 30 db; FREQUENCY RESPONSE: 20-20,000 cps ± 1 db; DISTORTION: Less than 1%; AUTOMATIC FREQUENCY CONTROL (AFC); With defeat switch to permit tuning in distant stations adjacent, on the dial, to strong local stations; FM DRIFT: Maximum ± 5 kc.; HUM: 60 db below 100% modulations. CRCUIT: Amstrong type, with limiter and Foster-Seeley discriminates; TUNING EYE: EM80/68RS for pinpoint tuning of stations; BUILT-IN ANTENNA: Line card type, with provisions for external antenna in "fringer areas. TUBES: 6UB, 6886, 12A77, 2-6AU6, 6AL5, EM80/68R5; selanium rectifier. For 105-120 volts, 60 cps AC. Styling is modern, with gold-finished removable front panel and block metal calculations. Net 47.50

## NEW! LA-45 14-WATT AMPLIFIER 39.50 Only 5.00 Down!

NEW! LA-45 14-WAII AMPLIPIEK JS.5U Unity 5.UU Uown!

The Lofoyette LA-45 is a complete 14-walt amplifier with built-in preamplifierequalizer with wide range frequency responte and low hum and distortion to ensure
sporkling reproduction that will delight you. This undistorted power is achieved from
circuitry employing the new premium quality EL84 tubes in a pentode-connected ball
onced author circuit. 3 inputs are provided for every type of crystol, ceromic or
magnetic phono cartridge, for tuner and tope head as well as high level auxiliary
input. The front panel function selector and equalization rwitch gives instant choice
of tuner, aux, or phono with proper equalization for all types of records, and tope
head Equalization. A "Manitar" lock and switch permit tope monitaring, provide a
high level signal for tope recording, or allow plug-in use of the new sterea
adapters. Other features include a 12 db per active rumble filter, an auxiliary AC
receptacle, provision for mounting in cobinet or an a console panel, attractive finish
that blends hormoniausly with both modern and traditional decar, and a power an-off
pilot light. Its appearance matches the Lafayette LT-75 tuner. It comes complete with
emovable case.

## SPECIFICATIONS

SPECIFICATIONS

POWER: 14 waits normal, 28 waits peak. FREQUENCY RESPONSE: 30.20,000 cps

1 db. IM DISTORTION: less than 1½ % (60 and 7000 cps) at full output, HUM1
Tuner 80 db, phono 60 db below full output, INPUTS: Crystal phana, tuner, magnetic
phana, tape head, our. OUTPUTS: Monitor, speaker (8 and 16 ahms). CONTROLS:
function selector and equalization, bass, treble, loudness with AC an-off switch,
manitor an-off switch, rumble filter an-off switch, RUMBLE FILTER: 12 db per actave
below 100 cps. EQUALIZATION: RIAA (F), POP (78), TAPE HEAD (NART8). TONE
CONTROLS: 12 db cut or boost an bass or treble. INPUT SENSITIVITY: For full
output: ½ valt for tuner, crystal or ours; 2.7 millivals for magnetic phana or tape
head. DAMPING FACTOR: 10. TUBES: 2-12AX7, 2-EL84; EZ81 (rectifier). AC OUTLET. MOUNTING: Cobinet or ponel. SIZE: 13% SIMPPING WEIGHT: 15 lbs.
LA-45—14-watt amplifier

## MONAURAL SYSTEM TO PLAY BOTH STEREO AND MONAURAL RECORDS

CONVERT TO COMPLETE STEREO LATER

COMPONENTS LAFAYETTE LA-45 14-WATT COMPLETE AMPLIFIER 39.50 GARRARD RC-121 4-SPEED RECORD CHANGER NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE LAFAYETTE SK-58 12" COAXIAL SPEAKER 29.50 3.95 LAFAYETTE PK-111 WOOD BASE 139.05 HIGH FIDELITY PHONO SYSTEM

## Play Stereo & Monaural Records, Monaurally, Now-Add Complete Stereo Later

REGULAR PRICE -139:05 **SAVE 31.55** 

YOU PAY 107.50 ONLY 10.75 DOWN-10.00 MONTHLY

ONLY 10,75 DOWN—10,00 MONTHLY

Level control. The system is supplied complete with cobles, connectors, and easy-to-follow installation instructions. For 105-120 valts 60 cycles AC. Shop, wt., 55 lbs.

HF-564—Complete 14-Wott Phono System with blande, mohagany or walnut wood changer base plus choice of cartridges (please specify)

HF-565—Same as HF-564 but with lafayette CA8-16 mahagany or walnut ar CA8-17 blande resonator types speaker enclosure (please specify finishes). Net 135.00

LAFAYETTE FM PMONO MUSIC SYSTEM

ONLY 10% DOWN

HF-566—Same as HF-564 above but includes new Lafayette LT-75 FM Tuner.

Net 155.00

HF-567—Same as HF-565 above but includes

LT-75 FM Tuner.

Net 182.50

An economical high fidelity system with outstanding performance features for highly-satisfying tone quality. It's all ready for stereo; conversion will involve only a few easy interconnections, includes the new Lofoyette LA-45 14-Watt amplifier, with frequency response of 30-20,000 cps, and with "Monitor jacks for plug-in use of a stereo adopter when desired; the Gorrard 4-speed automatic record changer Madel RC-121/II all set for stereo whenever you're ready: The new GE VR22 (7-MIL) Diamond Stereo Cartridge engineered for virtually hum-free performance with a frequency response from 20 to 20,000 cycles, for both stereo and micrograve LP and 45 rpm records; the Lafayette PK-111 waad changer base, of fine, selected veneers; and the world famous Lafayette SK-58 cooxial 12" speaker with "Brilliance" high-frequency

SELECT YOUR OWN CARTRIDGE
You may substitute the Shure M7D, Pickering 371.7D or the new Electro-Voice 31MD7 in any system shown with the GE VR-22 at no additional cost.

## COMPLETE HARMAN-KARDON FM-AM STEREO-PHONO SYSTEM 50-Watts (25 Each Channel)




HARMAN-KARDON

AMPLIFIER

CHANNEL

HK250 50 WATT

HARMAN-KARDON TP200 STEREO TUNER & CONTROL CENTER





GE VR-22

1.7 MIL DIAMOND UNIVERSITY 312 CARTRIDGE TRIAXIAL SPEAKERS



## SPECIALLY PRICED! SAVE OVER 30%

HARMAN-KARDON TP200 STEREO TUNER & CONTROL 189.95 HARMAN-KARDON HK250 50 WATT STEREO AMPLIFIER (25 EACH CHANNEL) GLASSER-STEERS GS-77 (less base)
GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 59.50 24.45 2-UNIVERSITY 312 TRIAXIAL SPEAKERS @ 71.54 . 143.08 Regular Catalog Price 516.93 YOU SAVE 127.43 YOU PAY

389.50 38.95 Down 24.00 Monthly

HF-630 Sterea system as illustrated. Shpg. wt., 85 lbs. Net 391.95 Recommended enclosures for the MF-630 system are the: Lafayette Eliptoflex series Bookshelf Enclosure or CAB-16 Recommended ethics series Books Series Resonance Eliptoflex series Books Series Resonance Enclosure.

(Please specify finishes).

HF-631 same as HF-630, but with 2-Lafayette SK-114
12" with 6% lb. magnet 3-way speakers and 2 Lafayette
Eliptoflex Series Enclosures, Shpg. wt., 133 lbs.

Net 487,95
48.79 Down 27.00 Monthly
Glaser-Steers GS-77 in ebony
Net 9.60

## GO STEREO NOW! Super-Fidelity Easy Build Kits

## FIGO HI-FIKITS

**NEW! EICO STEREOPHONIC** 



DUAL PREAMP

Self-powered preamp-control center offering complete switching and control facilities for any stereo program source—topes, discs or broadcasts. Each channel pravides: low-level inputs — magnetic cartridge, tape head, mike, high-level laputs—AM and FM tuners, FM multiplex, auxiliary A and B<sub>i</sub> independent level cantrol operating separately with 

HF85K Stereo Dual Preamp Kit Net 64.95 HF85 Same, factory wired & tested

Model HF-81K STEREOPHONIC NEW! DUAL



AMPLIFIER-PREAMP Only 69.95

A handsome complete hi-fi stereophonic control center with 2 matched Williamson type push-pull EL84 power amplifiers, all on one chassis. Each channel has 8 inputs: low level-mag phono, tape head, and microphone. Front panel switch for chaice of proper NART8 tape equalization for either 7½ or 15 or 3½ ipps, high level — 2 auxilliaries, AM, FM and FM multiplex. Front panel control to obtain stereophanically FM and AM or FM and FM Multiplex; Gonged level controls and a separate facus (balance) controls Independent, low distortion variable cross-over feedback type of bass and treble controls for each channel. Adaptable to any ponel thickness for console installation. Output Power rated 28 watts (continuous) for manaurol, 14 watts for stereo. Frea. Response — ± 5 db, 10 to 100 kc at 2 w aut. IM Distortion (60 and 6000 cps at 4:1) = 0.5% at 10 watts out. Harmonic Distortion — less than 1½ from 40-10 kc at 20 w output. Sensitivity for rated output — mag phono: 4 mv; tape head: 2 mv; mic; 6 mv; tuner and ouxiliaries: 0.5 v. Hum and Noise Level (below 14W): = 56 db on low level input, — 75 db on high level inputs. Boss — ± 15 db at 50 cps. Treble — ± 15 db at 10 kc. Speaker Connections — 4, 8, 8 16 ahms. Tubes — 4 ECC83/12AX7, 2 ECC82/12AV7, 4 EL84, 2 EZ81. Size 15 x 10½ x 4½". Shpg. wt., 24 lbs. A handsome complete hi-fi stereophonic control center with

Model HF-81K. Kit camplete with cover Not 69.95 Model HF-81 As above but wired



NEW! EICO FM TUNER HFT-90

KIT \$39.95 Wired \$65.95

Cover \$3.95

NIT \$39.95 Wired \$65.95 Cover \$3.95

Newly-designed, extremely sensitive, low-noise "front end" supplied in a cast housing completely pre-wired, pre-aligned, ready to use. This new front end, for the first time makes it completely practical even for a novice to build an FM tuner equal to really good professional factory-wired units. Employs the broad-band detector circuitry used in \$169 FM tuners now on the market. Temperature-compensated components and advanced circuitry completely eliminate need for AFC. Drift is less than 2 parts in 10,000 from cold start. Sensitivity is 6 times greater than other kit tuners and equals that of the most expensive wired tuners; it is 1.5 uv for 20 db quieting Radiation suppressed far below FCC standards. Also features new DM-70 traveling tuning eye. Input 300 ohms, IF bandwidth 260 kc, detector separation of 600 okc. Freq. resp. 20-20,000 cps-1 db. Audio output 1 V for 10 uv input with 75 kc deviation. Hum 60 db below 1 V. Cathode follower and multiplex outputs. Flywheel sliderule tuning, AGC, stabilized low limiting threshold for excellent performance from weaker signals, broad-band ratio detector for improved capture ratio and easier tuning, full-wave rectifier and heavy filtering, very low distoration. Uses 1-ECC85/6A08, 3-6AU6, 1-6AL5, 1-6C4, 1-DM70, 1-6X4. Flexible "low silhouette" design adaptable to any panel thickness for console installation; optional cabinet. HWD: 34m x 12" x 8Va". Operates from 110-125 VAC. 60 cps line.

HFT 90K FM TUNER KIT (less cover) Net 39.95 HFT 90 FACTORY WIRED AND TESTED TUNER Not 65.95

12-WATT WILLIAMSON-TYPE HI-FI AMPLIFIER . PREAMP ... CONTROL SECTION



COMPLETE KIT.

WIRED.

34.95 57.95

Compact, attractively styled amplifier with complete front end facilities and true high fideltly performance. Direct tope head and magnetic phano inputs with NARTB (tape) and RIAA (phano) feedback equalizations. Dual triade circuit for yorioble turnover bass and treble feedback. Pope controls. Power output: 12 watts continuous, 25 watts peak. Intermodulation distortion 1.5% at 12 watts, 0.55% at 6 watts, 60 to 6000 cps. Frequency response: 12-50,000 cps ± 0.5 db at 1 watt; 25-20,000 cps ± 0.5 db at 1 watt; 25-2

Net 34.95 HF12K-Complete Kit .... HF12 -As above, factory wired Not 57.95

aujette STEREO TUNER KIT

THE STEREO-TUNER IS YEARS AHEAD



ONLY \$7.45

DOWN

\$8.00 MONTHLY

KT-500 IN KIT FORM LT-50 124.50 COMPLETELY WIRED

## THE LAFAYETTE STEREO-TUNER IS UNIQUE AND INCOMPARABLE

More than a year of research, planning and engineering went into the making of the Lofayette Stereophonic Tuner. Designed against obsolescence, it incorporates every practical and worthwhite feature that is considered necessary for your complete satisfaction of all present and future types of broadcasting. Already, breathloking stereophonic programs are being transmitted via FM and AM. It will certainly become more and more the popular method of high fidelity broadcasting. The funer also provides an output for multiplex FM stereophonic reception, enabling you to enjoy the ultimate in high-fidelity sound reproduction. Since the FM and AM sections are completely independent of each other, this tuner can be used furthermore as a dual-monaural funer. In this way, the music lovers are able to listen to concert programs on the FM channel in one room, while the younger-set can listen to a different program on the FM channel in one room, while the younger-set can listen to a different program on the FM channel in an errorm, in addition, on a monaural program which is broadcasted simultaneously via FM and AM, this funer will enable you to tune in both channels and reproduce them through individual amplifier-spooker systems. The improvement of quality will be immediately noticeable because the sound source is now distributed and at the some time, the hole-in-the-wall point source effect is completely eliminated. Of course, the unit can also be used as an ordinary type of FM-AM tuner; providing you with unsurpossed quality of reception.

Aport from its unique flexibility, this is, befare all else, a superior high-fidelity tuner, employing many features found only in the highest priced units. An inspection of the tubes and ports used will reveal that this tuner is engineered without compromise of any kind. With the Lafayette Stereo-Tuner you are assured of noise-free, diff-free, distortion-free performance. You will not only have this, quality, but also sense it even in the mechanical details; in the "feel" on the velvet-s

● MULTIPLEX OUTPUT FOR NEW STERED FM ● TWO PRINTED CIRCUIT BOARDS AND IF'S PREALIGNED ● FM AFC AND AFC DEFEAT ● TUNED CASCODE FM FRONT END ● 17 TUBE PERFORMANCE — 11 Tubes (4 dual-purpose) + Tuning Eye & Selenium Rectifier ● ARMSTRONG CIRCUIT WITH DUAL LIMITERS AND FOSTER-SEELEY DISCRIMINATOR ● 12 TUNED CIRCUITS AND DUAL CATHODE FOLLOWER OUTPUTS ● EXTREME SEMSITIVITY AND WIDE FREQUENCY RESPONSE • THE MOST FLEXIBLE TUNER EVER DESIGNED!

THE MOST FLEXIBLE TUNER EVER DESIGNED!

Use it as a Stereophonic FM-AM Tuner Use it as separate Monaural FM & AM Tuners Use it as straight Monaural FM or AM Tuner



Use it os Monaural FM & AM Use it os seporate Monoural FM or AM Tuner

LAFAYETTE OFFERS THE FAMOUS KT-300 PREAMP KIT AT A SPECIAL SUMMER PRICE - OFFER EXPIRES SEPT. 15, 1959



7.00 MONTHLY

LAFAYETTE MASTER AUDIO CONTROL CENTER with BINAURAL CHANNEL AND DUAL VOLUME CONTROL

Self-Powered

DC On All Filaments

24 Positions of Equalization

Tape Head Input, High Impedance

Dual Cathode Follower Output Stages

Tope Head Input, High Impedance • Dual Cathode Follower Output Stages
This is not only the finest hi-fi preomp characterized by unmatched features, but it has been
functionally designed to keep pace with the conversion of your present hi-fi system to binoural
(Stereophonic) sound. Incorporates an extra channel and dual volume control for binoural
reproduction. Features include DC on all tube filoments, negative feedback in every stage,
dual cothode follower output stages and lotest printed circuit construction. Less than 0.09%
IM distortion and less than 0.07 harmonic distortion at 1V. Hum and noise lever better than
80 db below 3V. Uniformly flat frequency response over entire audible spectrum. 7 inputs for
every type of phana, tuner or tope. Tasteful styling, brilliantly executed. Size 12½ × 9½ x
3½ - Shag. wt., 10½ lbs.

KT-300—Lafoyette Moster Audio Control Kit Complete with cage and detailed assembly instructions.

LT-30—Some as above completely wired and tested with cage and instruction manual

DELUXE 7,0 WATT BASIC AMPLIFIER

a Metered Balance And Blas Adjust Controls a Available in Kit and Wired Ferm Here's ultra-stability in a 70 watt basic power amplifier employing highest quality components conservatively rated to insure performance and long life. Features matched pair KT 88's and wire range linear Chicago autput transformer, variable damping control, meter for bias and bolance and gold finish chassis. Frequency response 10-100,000 cps ± 1db. Hum and noise 90 db below full output. IM distartion less than 1½% at 70 watts, less than 0.3% below 30 watts. Harmonic distartion less than 2% at 70 watts from 20 to 20,000 cps ± 1 db. Output impedance 4, 8 and 16 ahms. Mandsame decorative cage perforated for proper ventilation. Size 14½ x 10 x 73% including cage and knobs. Shpg. wt., 40 tbs.

KT-400-Lafoyette 70 watt Deluxe Basic Amplifier Kit camplete. Conservatively Rated At 7D Watts e leverse Feedback
 Metered Balance And Blas Adjust Controls
 Availab

ossembly instructions.

LA-7D-Some as above completely wired and tested with cage and instruction manual


## SAVE \$ WITH Lafayette & TEICOLE HI-FI KITS

## afayette PROFESSIONAL STEREO MASTER AUDIO CONTROL CENTER With All The Versatility Of A Broadcast Studio Control



PRECISION "NULL" STEREO CALIBRATION'S BALANCING CONTROLLED CROSS-CHANNEL SIGNAL MIXING THIRD CHANNEL CONTROLLED OUTPUT @ CONTROLLED MONAURAL MIXING OF ALL INPUTS @ 24 SEPARATE EQUALIZATIONS ON EACH CHANNEL . MONAURAL RECORDING OR PLAY WITH STEREO SOURCES

● 6 CONCENTRIC FRONT-PANEL CONTROLS ● 4 CONCENTRIC REAR-PANEL INPUT LEVEL CONTROLS ● SWITCHED FLETCHER-MUNSON LOUDNESS CONTOUR COMPENSATION PARALLELED OR SINGLE CHANNEL AMPLIFIER DRIVE WITH MONAURAL SOURCES . 180° PHASE REVERSAL . CHANNEL REVERSAL WITH OR WITHOUT PHASE REVERSAL



## PERFORMANCE SPECIFICATIONS FOR SUPER-STEREO

PICK SUPER-STREET

PESPONSE TO-25,000 (PS - 0.5 08 • TAPE

HEAD PLAYBACK EQUALIZATION FOR NEW 4-TRACK

STREET • LOW LEVEL SEMILITARY 1.78 MILLIPOLTS

FOR 1 YOLT • MIGH LEVEL SEMISITARY 187

MILLIPOLTS FOR 1 YOLT • SWITCHED 12 D8/OCTAVE PUMBLE & SCRATCH FILTERS . LESS IMAN .D.3 RUMBLE & STREET PILLER & CESS HARD BY SERVICE STREET OF THE STREET OF TH CAPACITIVE PICKUPS WITH FULL USE OF EQUALIZA TION SELECTORS . SIGNAL-TO-HOISE BETTER THAN - 80 OB AT MIGH LEVEL & -67 DB AT LOW LEVEL IMPUTS FOR 1 VOLT OUT ● "PRESENCE" SWITCH-FOR SOLO PROJECTION ● 6ASIC CONTROLS ALL CONCEN-TRIC . "PLATE FOLLOWER" OUTPUTS FOR LOW IM PEDANCE WITH LOWEST DISTORTION . 7-TYPE 7075 NOISE DUAL TRIODES . 4-AUXILIARY A

## SPECIFICATIONS

CONTROLS: 12 (6 dual cancentric, 6 single) on front panel, 4 on rear [dual concentric]. IMPUT AND TURNOVER SELECTOR: 7-position, dual concentric, independently set for each channel. Positions: Auz, Tape Amp. Tuner, AES, RIAA, Tape Head-800, LP. ROLL-OFF SELECTOR: 7-position, dual concentric, Independently set for each channel. Positions: LP. RIAA, AES, 10-5, 5, Flot, Tope Head BASS CONTROL: Dual concentric, 15 db boot or cut of 30 cps. TREBLE CONTROL: Dual concentric, 15 db boot or cut of 30 cps. TREBLE CONTROL: Dual concentric, 15 db boot or cut of 10,000 cps. RUMBLE FILTER: On-off switch, 12 db per octave slope, down 15 db of 30 cps. SCRATCM FILTER: On-off switch, 12 db per octave slope, down 15 db of 15,000 cps. STEREO FUNCTION SELECTOR: Dual cencentric, Each concentric switch telects different functions for both channels. Positions: Manageral A, Manageral B, Stereo, A + B, Calibrate: Calibrate, Reverse Phase, Normal, Reverse Channels, Reverse Channels, Reverse Phase, VOLUME-BALANCE CONTROL: Dual concentric. Clutch type: pulling out center knob lacks controls aport for independent adjustment when performing the "Null" stereo balance and calibrating operations pressing knob back in permits simultaneous operation as Master Volume Control for both channels, with Fletcher-Munson laudness contaur compensation when Loudness switch is on.

BRIDGE CONTROL: Continuously vortiable, with power on-off switch. Controls variable 3d-channel (Sirdee) output and cross-channel signal teed. LOUDNESS SWITCH: On-off. Provides laudness contaur compensation for Volume Control. PRESENCE SWITCH: On-off. Provides also projection by supplying a broad rise over approximately have actives; centered of 2,500 cps. TAPE MONITYOR SWITCH: Play-Monitar positions. REAR PANEL CONTROLS: IN-PUT LEVEL SET CONTROLS: 3, dual concentric, 250K ohms each, for the 3 high level inputs [tope Amp, Tuner, Aus.] PhONO LEVEL SET CONTROLS: sis level at autiput of preomplifiers tapes for Tape Head, Mag. Phono, Ceramic-Crystel-Copacitive Phono inputs, HUMB BALAN

KT-600 WX

LA-600 WX Same as above, completely factory wired and tesled

.Net \$79.50 Net 134.50

## न्द्राहण्डे 20 WATT HIGH FIDELITY AMPLIFIER KIT MODEL HF20K

- ±0.5 db 13 to 35,000 cps; ±1.5 db,
- 7 to 50,000 cps COMPARES WITH MOST EXPENSIVE
- AMPLIFIER MADEL
- BEST BUY IN SUPERLATIVE HIGH FIDELITY



\$5.00 Down -\$5.00 Monthly

COMPLETE 49.95

High quality equalizer and control section plus 20 watt Ultra-Linear Williamson-type power amplifier. Low distration feed-back equalization; 5 equalizations provided for lortion feed-back tone controls. "Flat" positions at center tortion feed-back tone control for one position of provides adjustable level set control both on front ponel. Provides adjustable level set. Aunsiliams to the compensation of no compensation when destending to 20 feed without offering tope output. Permits use of up to 30 ft. of coble.

Six inputss 4 high level switched inputs—Tuner, TV, Tope, availiary (crystal/ceramic phono or second tuner): 2 low Auxiliary (crystal/ceramic phono or second tuner): 2 low level inputs for twitched)—provides proper pick-up loading and attentuation for all leading magnetic, FM and high ing and attentuation for all leading magnetic, FM and high quality crystal cartifages without changing resistors. Hum quality crystal cartifages without changing resistors. Hum policy typed to eliminate the necessity for cobinety. Size: 8½" H, 15" W, 10" D. Shog. Wt., 24 lbs.

EICO MODEL MF20 — Feetney Wired

## EICO 30-WATT HI-FI INTEGRATED AMPLIFIER KIT with PREAMPLIFIER EQUALIZER AND CONTROL SECTION



57.95 Complete Kit VERSATILE EQUALIZATION
AND CONTROL NEWLY DESIGNED
"LOW-SILHOUETTE" CONSTRUCTION

Only \$5.80 Down - \$6.00 Monthly
Combines the high stability margin, wide frequency range, negligible distortion and exceptional power supply reliability of the power amplifier section with an extremely verso ity of the power amplifier section featuring tope head and lile preomplifier control section featuring tope head and lile preomplifier control section featuring tope head and time top head and microphane inputs on the usual facilities. Has 3 low level inputs in addition to the usual facilities. Has 3 low level inputs for TV or tuner, crystol or ceromic cortridge or level inputs for TV or tuner, crystol or ceromic cortridge or level inputs for TV or tuner, crystol or ceromic cortridge or level inputs for two runer, crystol or ceromic cortridge or level inputs for two runer, crystol or ceromic cortridge or level inputs for the equalization circuit of extremely low distortion action with equalization circuit of extremely low distortion action with equalization circuit of extremely low distortion action with equalization circuit of extremely low distortion continuous, 47 waits peak power with minimum distortion continuous, 47 waits peak power with minimum distortion.

1M Distortion: Below 1%, 20 cps. 20KC 1 db below 30 watts. Marshall the properties of Only \$5.80 Down - \$6.00 Monthly

BASIC

AMPLIFIER



35-watt "Ultra-Linear" power amplifier (70 watts peak) featuring E134 tapped-screen output stage, law noise E786 featuring E134 tapped-screen output stage, law noise E786 voltage amplifier, 65N7GTB, plus GZ34 rectifier. Frevaltage amplifier, 200,000 cps ±1.5 db @ 35 watts. Which is a peak of the peak of t

Net 47.95 Net 72.95 Net 4.50 25 lbs.

MF35K 35-w. Power Amp. Kit

MF35 Some, factory wired & tested

E-2 Matching Enclosure

Five-tube "Ultra-Linear" hi-fi amplifier roted 22 watts continuous, 44 watts peak. Low-naise EF86 direct-coupled to 55N7GTB drives push-built 6L6GB tapped-screen output 50 to 55N7GTB drives push-built 6L6GB tapped-screen output 50 to 55N 50N, 000 cos © 100,000 cos © 11 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion below 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cps ±1 db, both of distortion tape 19/6 from 20-20,000 cp

Williamson-type 14 walt (28 walts peak) power amplifier of low cost for both stered and manaural installations. It is not low cost for both stered and manaural installations. It is not low cost for both stered and manaural installations. It is not start of the star

LAFAYETTE STEREO CENTRAL REMOTE CONTROL MODEL KT-315

## ELECTRONIC STEREO ADAPTER KIT

This self-powered electronic adapter offers exciting features unique This self-powered electronic adapter offers exciting features unique even in the fast moving stereo field. Inclusion of low-impedance "plate follower" outputs permits remote operation 50 feet or more from the controlled amplifier. Unique of the stereo system by means of audible "null." Objectionable "hole-in-the middle" effect can be eliminated by cross-feeding variable amounts of audio from each channel. Includes controlled third-channel output for driving third amplifier and speaker, if desired. Individual or simultaneous control of each channel. Phase reversal with or without channel reversal. Selective monaural operation. Frequency response 10 to 25,000 cps. 10.5 db; gain 6 db; cross channel rejection better than 50 db.



THE LAFAYETTE KT-600 SOLVES EVERY STEREO/MONAURAL CONTROL PROBLEM

In Largestre's constant effort to bring you the very latest and most advanced developments in electronics—and particularly in high fidelity—at prices everyone can afford, bofgeste went to the most forward-looking experienced brains in the electronics/high fidelity industry and to new DARED to produce what we think is the MOST REVOLUTIONARY DEVELOPMENT IN STEREO MIGH FIDELITY—A BRILLIANT NEW ACHIEVEMENT—THE LAFATETE KT-600 STEREO MASTER AUDIO CONTROL CENTER!

CONTROL CENTER!

The KT-60C provides 4 dual concentric input level controls for balanced use of different types of program sources — such at AM and FM tuners, tope recorder with microthone, phonograph plus microphone, etc., and without overloading inputs 3 controls are for high level input and a separate level control is provided for the aurput of the preomplifier stage. The KT-600 provides separate turnover and rolleff dual concentric switches for 24 possible positions of accurate equalization on each channel; squalization on each channel may be set independently of the other-furthermore, all laputs can be variably mixed, monourally, are will (mike with phono, tope recorder with phono, etc.). The Bridge Control permits cross-channel feed or epstionally acts as a volume control for the 3d channel (Bridge) output to eliminate "plag-pons" or "hole-in-the middle" effects. An audible, sharp, accurate "hull" (dip in sound output) is provided by a "Calibrater" position of the Sereeo Function Switch working in conjunction with the clutch-type Balance Controls for precise stereo balance — highly important for good stereo performance. The 3d channel output can also serve for mixing any stereo program (stereo record, tope, AM/FM stereo) to produce excellent monoural recordings or to play a stereo program (stereo record, tope, AM/FM stereo) to produce excellent monoural recordings or to play a stereo program of the several is also present for correct positioning of stereo music to moke up for reversed-phase recordings sametimes found commercially, in which there is also present for correct positioning of stereo music to the right or to the left — and this may optionally be accompanied by phase reversal is elso present for correct positioning of stereo music to the right or to the left — and this may optionally be accompanied by phase reversal is elso sound. The KT-600 has Betreance Rise Switch which putts a selo Instrument out of the general misco bound. The KT-600 has persent

AND STILL OTHER PROFESSIONAL FEATURES OF LAFATETE'S RT-600 ARE: Tope head equelization for the new 4-track stereo topes; Master Goin Control ter individual or simultaneous adjustment of channel levels, inputs for constant velecity (magnetic) and constant amplitude (ceramic, crystal or copacitive) phono cartridges, all equalized by the Rolloff can Turnaver selector switches; individual channel cencentric bass controls and concentric trable centrols which permit pre-setting for good stereo topic lettings; tone control circuits we 5%-tolerance components and 2½ %-tolerance precision potentiameters for accurate centering of their "flat" positions; writched number on stereof historics; witched Fletcher-Munson loudness contour compensation; tepe monitor austral jacks and tepe Monitor-Play switch permit monitoring with recorders having special monitor weds and preemplifiers and also permit a stereof/menoural tope deck with 1 or 2 record/playback preamplifiers to be permanently connected to the RT-600 for secording and playback; "clots follower" output singes for low impedance (1500 ohm) outputs with extremely lew distortion; special low-flux power transformer and DC operation of all filaments for exceptionally low hum and coal operation; low-noise deposited metal-film resistors and 7 of the new permium low-noise type 7025 tubes are used for extra-good signal-to-noise ratio. The KT-600 has printed circuit board construction for ease of wiring and maximum performance stability.



## NEW! LAFAYETTE STEREO/MONAURAL BASIC POWER AMPLIPIER KIT

\*\*\* BAPATETTE DIEREV/ MVNAURAL DANIU I UNER AMELITED MI

\*\*\* 36-WATT STEREO AMPLIFIER -18-WATTS EACH C-4ANNEL \*\*\* FOR OPTIONAL USE AS 36-WATT
MONAURAL AMPLIFIER \*\*\* EMPLOYS 4 NEW PREMIUM-TYPE 7189 OUTPUT TUBES \*\*\* 2 PRINTED
CIRCUIT BOARDS FOR NEAT, SIMPLIFIED WIRING \*\*\* RESPONSE BETTER THAN 35-30,000 CPS

\*\*\*/y DB AT 18 WATTS \*\*\* LESS THAN 1% HARMONIC OR INTERMODULATION DISTORTION

\*\*\* A superbly-performing basic stereo amplifier, in easy-ra build kit form to sove you lots of money and be you get Into stereo now at minimum expense! Dual inputs are provided, each with individual volume control, and the unit may be used with a stereo preamptifier, for 2-18 watt stereo channels or, at the Bick of a switch, as a fine 36-watt monoural amplifier — or, if desired, it may be used as 2 separate monoural 18-watt amplifierst CONTROLS include 2 input volume controls, channel Reverse switch (AB-BA), Manou clispoperation of 2 speaker systems of up to 16 ohms. INPUT SENSITIVITY is 0.45 valls per channel for all output. TUBES are 2-6AN8, 4-7189; GZ-34 rectifier. SIZE 9-3/16" (10-9/16" with controls) a SV/5"a a 131%"w. Supplied complete with perforated metal cage, all necessary parts and detailed instructions. Shaps. wt., 22 lbs.

LAFAYETTE MI-FI KITS ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38

## LAFAYETTE SENSATIONAL VALUES in Stereo Turntables and Changers

## LAFAYETTE PROFESSIONAL TURNTABLE WITH AUTHENTIC HYSTERESIS SYNCHRONOUS MOTOR PERFECT FOR NEW STEREO & MONAURAL RECORDS

PROFESSIONAL 4-SPEED TURNTABLE WITH HYSTERESIS-SYNCHRONOUS MOTOR

The LAFAYETTE TRUE MYSTERESIS-SYNCHRONOUS MOTOR. Since many so-called "hysteresis" motors have appeared and will continue to appear on the market, it is important that you know the difference between the real thing, as provided by Lafayette, and the imitators with partial hysteresis motors.

THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR IS PERFECT FOR THE NEW STEREO AND MONAURAL RECORDS. THE FACT THAT THE NEW STEREO RECORDS CONTAIN VERTICAL MODULATION IMPOSES STRINGENT REQUIREMENTS ON TURNITABLES. THEY HAVE TO BE FREE FROM RUMBLE, FLUTTER, WOW AND SPEED VARIATION. THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR MEETS ALL THESE REQUIREMENTS WITH EFFORTLESS EASE, RESULTING IN SUPERIOR REPRODUCTION OF STEREO DISCS, AS WELL AS TREMENDOUS REDUCTION IN RECORD WEAR.

REDUCTION IN RECORD WEAR.

ONLY LAFAYETTE'S HYSTERESIS-SYNCHRONOUS MOTOR, in its price class, is made to extremely fine tolerances (an the order of .00001 inches)! Only tofayette's mator has 16 cares, a high permeability rator magnet, bolt strust bearings, allies sleeve bearings plus felt all reservoir, coaling fins as an integral part of the rator and a hollow rotor care for maximum efficiency and minimum heat. Only tofayette's mator can be alled from above, without disassembly, through a unique all feed system. Only tofayette's motor can be alled from above, without disassembly, through a unique all feed system. Only tofayette's motor has a self-aligning armature.

ONLY LAFAYETTE CAN GIVE YOU A REALTY PROFESSIONAL TURNTABLE WITH TRUE HYSTERESIS—

SYNCHRONOUS MOTOR AT SUCH AMAZINGLY LOW PRICES!

Here's THE turntable—the last ward in professional high-fidelity performance! A fine precision instrument in every sense. Just look at some of these OUTSTANDING FEATURES:—WOW AND FLUTTER: Less than 0.2% • TURNTABLE: Heavy, diecast aluminum. Lathe-turned for perfect balance and concentricity, 12" diameter—weighs approx. 4 lbs. and pravides amazingly constant speed; the extra-heavy rim acts just like a flywheel to prevent speed variations • TRUE HYSTERESIS-SYNCHRONOUS MOTOR: for smooth, lownoise, wow- and flutter-free operation • TRUB HYSTERESIS-SYNCHRONOUS MOTOR: for smooth, lownoise, wow- and flutter-free operation • TRUB HYSTERESIS-SYNCHRONOUS MOTOR: for smooth, lownoise, wow- and flutter-free operation • TRUB HYSTERESIS-SYNCHRONOUS MOTOR: for smooth, lownoise, wow- and flutter-free operation • TRUB HYSTERESIS-SYNCHRONOUS MOTOR: for smooth, lownoise, wow- and flutter-free operation • TRUB HYSTERESIS-SYNCHRONOUS MOTOR: for smooth, lownoise, wow- and flutter-free operation • TRUB HYSTERESIS-SYNCHRONOUS MOTOR: for smooth, lownoise, wow- and flutter-free operation • TRUB HYSTERESIS-SYNCHRONOUS • Oblaw average recorded level • INTEGRATED SPEED CONTROL: for all 4 speeds—78, 43, 33½ and 16½ rpm • 2 OVERSIZE, HEAVY DUTY IDLER Net 64.5D

LAFAYETTE MONEY-SAVER COMBINATIONS SAVE UP TO 20%

Save on these combinations of Lafayette turntables, arms and nationally famous compatible stereo diamond cartridges

COM8.	TURNTABLE	TONE	CARTRIDGE	SPECIAL	COMB.	TURNTABLE	TONE	CARTRIDGE	SPECIAL
PK-301 PK-302 PK-303 PK-304	PK-245 PK-245 PK-245 PK-245	PK-270 PK-270	Picker, 371-D Shure M7D GE GC-5 Picker, 371D	92.50 92.50 92.50 94.50	PK-305 PK-306 PK-307 PK-308 PK-309	PK-245 PK-245 PK-245	PK-280 PK-280 PK-905 PK-905 PK-905	Shure M7D GE GC-5 Pick. 371D Shure M7D GE GC 5	94.50 94.50 88.50 88.50 88.50

VALUE 129.50 ONLY 64.50 SAVE OVER 50%



## PK-240 ONLY

## 37.50 PK-240 & SAVE 11.50

Only 8.85 Down Monthly

PK-240 turntable with PK-270 professional 12" stereo tane arm with Shure M3D compatible stereo cartridge with PK-322 Net 88.50

## LAFAYETTE 4-SPEED PROFESSIONAL TRANSCRIPTION PLAYER WITH 3 LB. 12" ALUMINUM TURNTABLE

• IDEALLY SUITED FOR STEREO! • BETTER THAN-SO DB RUMBLE & NOISE • VIBRATIONLESS MOTOR SUSPENSION . BELOW 0,2% WOW & FLUTTER . MAGNETIC EDDY-CURRENT BRAKE

3 18. 12" BALANCED & MACHINED ALUMINUM TURNTABLE SPEED CONTROL FOR ± 7% VARIA-TION OF EACH SPEED


An amorting low price for the superior quality embodied in this fine instrument. Features include heavy, rim-weighted, 3 lb. machined-aluminum 12" furntable, magnetic brake with speed control for ± 7 % variation of each speed; the extremely low noise and rumble figure of —50 db below average recorded level; wow and flutter (speed variations) of less than 0.2%; new-type oversize precision-ground idler with special tubrication features; positive-locking detents on 4-speed single-knob speed selector; ("off" positions between all speed positions; free-floating shock-mounted motor; automatic idler disengagement in "off" positions; precision spindle turns on single ball bearing; heavy duty 4-pale induction mater. Heavy rubber turntable mat. For 105-120 valts, 60 spc AC; drows 0.13 amperes. Size of mater plate 11" x 10" x 14½"; advove. Complete with stroboscope disc, 45 rpm adapter, AC line cord. Shog, wt., 14 lbs.

PK-240 12" TRANSCRIPTION TURNTABLE

NO.	TURNTABLE	ARM	CARTRIDGE	NET	NO.	TURNTABLE	TONE	CARTRIDGE	NET
PK-312 PK-313 PK-314 PK-315	PK-240 PK-240	PK-90S PK-90S PK-90S	Shure-M7D	65.50 65.50 65.50 68.50	PK-316 PK-317 PK-318 PK-319 PK-320	PK-240 PK-240 PK-240 PK-240 PK-240	PK-270 PK-270 PK-280 PK-280 PK-280	Shure M7D GE GC-5 Pick. 371D Shure M7D GE GC-5	68.50 68.50 70.50 70.50 70.50

New Lafayette law-rumble Model PK-240 turntable with Pickering "Stantan" Model 196.7D stereo/manaural transcription arm with Stereo-Fluxvalve magnetic cartridge and 0.7 mil diamond stylus.

PK-321 ......



## THE REVOLUTIONARY NEW LAFAYETTE VERTICAL-LATERAL KNIFE-EDGE 12" & 16" STEREO TONE ARMS! 4. HARDENED-STEEL KNIFE-EDGE PIVOTS & BEARINGS FOR COMPLETE, PRACTICALLY FRICTIONLESS, FREEDOM OF MOTION

LIGHTWEIGHT, DIE-CAST ALUMINUM TONE ARM

. SELF-CONTAINED BUBBLE LEVEL FOR PERFECT, GUESS-FREE LEVELLING · LIGHT, MOLDED PLASTIC PLUG-IN SHELLS FOR MOST POPULAR STEREO CARTRIDGES

PRECISELY-ADJUSTABLE COUNTERBALANCE WEIGHT

NON-RESONANT WITHIN THE AUDIBLE FREQUENCY RANGE

• PERFECT TI ACKING WITH THE LIGHTEST STYLUS FORCE

● EXTREMELY EFFECTIVE FOR PERFECT REPRODUCTION WITH "45-45" STEREO DISCS

\*\*RUGGED\*\* CONSTRUCTION — FOOLPROOF — TROUBLE FREE

A remarkable advance in tane arm design is presented in these new Lafayette tane arms. An unusual new principle, utilizing 2 vertical and 2 lateral hardened-steel knife-edge pivots supported by hardened steel bearings, provides extremely low harizontal and vertical friction. This unusual type of bearing provider minimum waveform distortion and no undesirable motion or loose-jointed action as viewed from the stylus end. Graave tracing is smooth, with excellent tracking even with very light pickup weight, due to the absence of frictional lasses. Friction in harizonal and vertical directions is low, but mechanical impedance is high at 45°, providing maximum effectiveness with 45-45 stereo carridges. The unique knife edge bearing construction makes it possible to draw out the 2 shielded leads from the center of the support column, eliminating "stiffness friction" due to the leads. A highly-precise bubble level is provided of the top of the support column; the bubble plus 3 adjustments on the base make for perfect levelling. Height of the orm is adjustable from 11½" to 2½" above materbaard. Overall length of PK-270 12" arm is 12½"; linear distance from support column to stylus tip is 10"; the PK-280 16" arm is 14½" averagic, effective length is 11½".

PK-270 tofayette 12" Tone Arm. Shpp. wt., 1½ ibs.

Net 17.50

Net 19.50

## LAFAYETTE COMPLETE STEREO TRANSCRIPTION PLAYER

S-CONTACT PLUG IN HEAD FOR ALL STEREO CARTRIDGES

4-SPEED, HEAVY DUTY 4-POLE TRANSCRIPTION TYPE INDUCTION MOTOR

MAGNETIC BRAKE FOR

±7% SPEED ADJUSTMENT

STYLUS WEIGHT ADJUSTMENT SCREW ON TONE ARM

RUMBLE AND NOISE -40 DB . LESS THAN 0.3% WOW

Here is a complete hi-fi, compatible stereo pickup system, designed against obsolescence and yet priced modestly. This top quality manual player features a 5-contact plug in head to accommodate the latest stereo as well as man

Equally important in contributing to the excellent performance of this system is the new 4-speed turntable assembly It is equipped with a quiet, heavy duty 4-pole motor, with an exclusive magnetic brake for instantaneous fine adjustment of each speed. Straboscope disc also included, Smooth aperation is assured further by the 10" heavy turntable, fitted with rubber man, Pravision for easy adjustment of stylus pressure is available. Dimensions of maunting plate 12-15/16" left to right, and 10%" front to reor. Requires 2%" below and 3" above mater board. For 105-120V, 60 cps. Accessories included are: 45 rpm adaptor, output cable to amplifier and plug in heads. Shpg. 14 lb.

wt., 14 lbs.
PK-160S—Complete stereo transcription player, less cartridge
SPECIAL MONEY SAVING COMBINATIONS PK-323 Same as above with PICKERING 371D PK-324 Same as above with SHURE M7D PK-325 Same as above with GE GC-5

PK-162-Wood base for above, custom finished in either mahagany or blande (Please Specify). Shag. wt., 5 lbs. PK-163-Unfinished mounting board for above. Strong durable " aumwood, (Shog wt., 1 lb.)



## DELUXE WOODBASES AND MOUNTING BOARDS FOR TRANSCRIPTION TURNTABLES



FINEST SELECTED HARDWOOD VENEERS
CHOICE OF FIVE CABINETMAKER FINISHES
FREE-FLOATING FOAM RUBBER MOUNTED
MOTOR BOARD
INDIVIDUAL ADJUSTABLE FEET FOR ACCURATE

These substantial woodbases are deluxe units made from the finest selected hardwood veneers by skilled craftsmen. All four sides are ½" thick and the top is %". All have firmly secured mitered carners. The four bumper feet are individually adjustable for accurate leveling. The free individually adjustable for accurate leveling. The free individually adjustable for accurate leveling. The free individually adjustable from rubber mounted and the top hat a finish mothing the woodbase. Available in five top hat of inish mothins the woodbase. Available in five wolnul and fruitwood; please specify when ardering. The wolnul and fruitwood; please specify when ardering. The installation. Accommodates a turn'able and a 12" or 16" installation. Accommodates a turn'able and a 12" or 16" installation. Accommodates a turn'able and a 12" or 16" tone arm. Size, 211/s" x 16%" x 53/s". Shaps. wt., 15 lbs. pK-265 Base and board cut for pK.245

Net 14.95

PK-266 Base and board cut for PK-240 ...Net 14.95

PK-267 Base and board uncut for mounting other makes of turntables MOUNTING BOARDS FOR

LAFAYETTE TURNTABLES

Precut, unfinished, smoothly sanded mounting boards for Lafayette turntables. Ready for easy finishing. Size 15%" x 20½" x ½", Shoga, wt., 3 lbs. Net 3.45 PK-268 Cut for PK-245 turntable Net 3.45 PK-269 Cut for PK-240 turntable

**NEW! Lafayette VISCOUS-DAMPED** STEREO TONE ARM — PROFESSIONAL 12" PK-90S



JEWEL BEARING SUPPORT
INSTANT PLUGIN CARTRIDGE CHANGE
AUTOMATIC FLUID CONTROL
PERFECT RECORD TRACKING
ACCOMMODATES MOST STEREO & MONAURAL
HIGH FIDELITY CARTRIDGES

This Stereo/Manaural transcription arm assures dependable and stable aperation, utilizing the floating-action principle of viscous-damping. The arm is supported at a single ciple of viscous-damping. The arm is supported at a single representation to be a single of the principle of the point by a pivot and jewel bearing having negligible friction. Damping is accomplished by a silicant fluid accuration. Damping is accomplianted and nestigible tracking the gap between a ball and socket. This damping ing the gap between a ball and socket. This damping ing the gap between a ball and seeked. This damping ing the gap between a coccidentally drapped. Low frequency rether tane arm be accidentally drapped. Low frequency rether tane arm be accidentally drapped. Low frequency rether tane arm because and accepts all records up to 12" and mixed. The tone arm accepts all records up to 12" and mixed. The tone arm accepts all records up to 12" and mixed. The tone arm accepts all records up to 12" and in the proper styles pressure, simplify installation and provide proper styles pressure. It is a provided to the proper styles are supported to the proper styles are supported to the proper styles are supported to 12"; height adjustable from 1/4" to 2/4" and the proper styles pressure. It is a proper supported to the proper styles pressure. It is a proper supported to the proper styles pressure. It is a proper supported to the proper styles are sup Shpg. wt. 21/3 lbs.
PK-905-12" VISCOUS-DAMPED STEREO TONE ARM
Not 12.50

## NEW! JOBOPHONE 1301 MS SEMI-PROFESSIONAL TRANSCRIPTION TURNTABLE

with Constant Speed Synchronous Motor

DESIGNED STEREO RUMBLE

IMPORTED FROM HOLLAND TO SAVE



SPECIALLY PRICED! 24.95 QUANTITY

· COMPLETE WITH RONETTE STEREO/MONAURAL TURNOVER CARTRIDGE

PATENTED "SONOMAT" HIGH TORQUE DRIVE ASSEMBLY FOOLPROOF COLOR-CODED
PUSHBUTTON SPEED SELECTION 1/2 OF 1% SPEED
ACCURACY LESS THAN 0.29% WOW & FLUTTER COLOR-CODED

ACCURACY LESS THAN 0.29% WOW & FLUTTER

A precision engineered 4-speed turntable with mony notobte features. Only moderately-priced turntable with
"gyra-action" turntable suspended an single bail bear
"ing with deep-well bross sleeve. Recard, turntable and
spindle rotate as a single unit to prevent wear of recard
spindle rotate as a single unit to prevent wear of recard
spindle rotate as a single unit to prevent wear of recard
spindle rotate as a single unit to prevent wear of recard
spindle rotate and reduce the passibility of rumble, wow, and
center hale and reduce the passibility of rumble, wow, and
center hale and reduce the passibility of rumble, wow, and
center hale and reduce the passibility of rumble, word
and flutter. EXCLUSIVE adjustment of stylus force. PATtop of the arm for ready adjustment of stylus force. PATtop of the arm for ready adjustment of stylus force. PATtop of the arm for ready adjustment of stylus force. PATturntable met with special ridged profite permits most
furnished to floor on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof recard to floot on oir. Built-in muting switch; outoof switchswitch-inswitch-inswitch-inswitch-inswitch-in-

## afayette OFFERS OUTSTANDING VALUES FOR THE AUDIOPHILE

## **NEW! LAFAYETTE 12"** SINGLE SPEED 331/3 - RPM HYSTERESIS TURNTABLE



- IDEALLY SUITED FOR STEREO
- TRUE HYSTERESIS-SYNCHRONOUS MOTOR
- RUMBLE & FLUTTER LESS THAN 0.2%
- 41/2 LB. RIM WEIGHTED ALUMINUM TURNTABLE
- Sale! STURDY MOUNTING PLATE OFFERS MAXIMUM SHIELDING

Beautifully styled and modestly priced! This 331/3 rpm turntable offers superior performance for hi-fi and professional use. Accurate and close tolerance machining throughout insures trouble-free operation, with extremely low levels of wow, flutter and rumble. Employs superior craftsmanship throughout-all critical parts are ground to micro finish. True hysteresis synchronous motor provides absolutely constant speed regardless of line voltage variations. Motor is shockmounted with rubber cushion. Has precision ground shaft which turns on heavy ball-thrust bearing, thereby eliminating any vertical movement— a prerequisite for stereo. The 41/2 lb. die-cast rim-weighted aluminum turntable is lab-tested for perfect dynamic balance. The oversize heavy duty roller wheel provides positive rim drive. The roller is disengaged in "Off" position to prevent flat spots. Sturdy mounting plate offers maximum shielding against hum pick-up. A rubber turntable mat is provided so that maximum tracking is assured. Less than 0.2% wow and flutter. Noise level is 45 db below average recording level. The turntable is attractively styled to blend with any home decor. Has "On-Off" switch and indicator light. Requires 26 watts on 105-120V., 60 cycles AC. Size: 13½ x 14½ x 6½". Shpg. wt., 19 lbs. Net 47.50

## LAFAYETTE PROFESSIONAL BULK TAPE ERASER AND DEMAGNETIZER

- COMPLETELY ERASES TAPE REDUCES NOISE LEVEL
- FOR 3", 5", 7", OR 101/2" REELS TWO ERASING COILS
- 61/2 AMPERES DRAIN

Regularly 49.95 Special 21.50


A carefully designed and precisely manufactured professional tape "degausser" for complete erasing of tapes. Just place the tape reel on spindle of demagnetizer, slow-ly rotate 2 or 3 turns, take off, and that's all-a carefully designed and the entire tape—even extro strong sounds too loud to be removed by the recorder's own erase head. Campletely clears tape of any prior recordings. In addition, by clears to permanently dispersion of the entire tape with the entire tape and the entire tape with the entire tape hiss to the level of new "virgin" tape. In fact, tape hiss to the level of new "virgin" tope. In fact, tape hiss to the level of new "virgin" tope. In fact, tape hiss to the level of new "virgin" tope. In fact, tape hiss to the level of new "virgin" tope. In fact, tape hiss to the level of new "virgin" tope. In fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" tope in fact, tape hiss to the level of new "virgin" to over the erost.

In the demagnetizer to permanently disposate to the level for down over 6% are used to demagnetize to plus loads and work over 6% are used to demagnetize to push of the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demagnetize to the work over 6% are used to demag

prefer to permanently disconnect the recorder's erose head, and use only bulk erosure. Two completely separate coils are used for doubly effective erosure, even at lorse, 10½" reels. An extro powerful unit for heavy-duty usedrows over 6½ amperes. The Lofayette Topo Demognatizer offers all of these features, and at this special price. Con be used to demognetize tope, magnetically striped film, plus tools and watches. This professional unit has a heavy, custom finished case, a rugged non magnetic top, heavy duty an-old switch and power card. Hos built-in fuse, Pilot light prevents accidentally leaving it turned on. Size 6½" a 7½" x 3½". Shop. wt., 14 lbs.

## LAFAYETTE TAPE HEAD DEMAGNETIZER

• REMOVABLE POLEPIECES EXTRA CONVENIENT



Unlike other demagnetizers, the Lafayette Tape Head Demagnetizer uses removable polepieces. Three camplete sets are futnished: straight, 45°, and 90° (right angle), permitting quick and easy use with any tape head. Tape heads need no langer be removed from the recorder so they can be reached by the clumsy polepieces of older head demagnetizers; the Lafayette Demagnetizer's palepieces reach every head.

For from being a luzury, a tope head demagnetizer is necessary for best tape recorder performance. Among all the possible sources of noise in tape recorders, there is only one which is common to all recorders and is a perfectly natural, common occurrence—tape hits due to magnetized heads. Although unmagnetized when new, tape-heads gradually become magnetized by sharp switching pulses occurring while switching the recorder from play

to record or vice verso. Some oudio sources (especially the human voice) produce unbolonced signols containing more power peaks in one direction than in the other. This unevenness is also sufficient to cause magnetization of

This unevenness is also sufficient to cause magnetize tian of tape head.

The solution is to use a demagnetizer to remove this permanent magnetism from the head, thus reducing the naise level. Periadic head demagnetization is required for all tape recorders to insure aptimum signal-to-naise rollo. For this reason, some professional tape recorders are demagnetized as often as several times weekly. Now, Lafayette enables anyone with even the most modest budget to perform this necessary demagnetization, with a minimum of effort. For 110 volts 60 cycles. Shap. wt., 1 lb.

## NEW! LAFAYETTE PK-244 NEEDLE BALANCING GAGE



REEL LOCKS Set of Two

Holds tope recorder reel in place by locking spindle to reel. Especially useful if recorder is in vertical position. Will not interfere with normal operation of reels. Easily semanable.



Mere's a terrific value! The tamous RCA Autosplicer cuts a diagonal flap laint in the tape and trims the splicing tape and tope edges with an indented trim cut. The slight tope and tape edges with an indented trim cut. The slight tope and tape edges with an indented trim cut. The slight corder mechanism and prevent adhesive from contacting recorder mechanism and prevent layer-to-layer adhesion. No more "waw", "flutter", or errotic performance due to adhesive deposited an tape guides, etc. Cansists of a lape alignment guide with self-adhesive back for fastening to any surface, cutting unit with diagonal cutter on one side and waist-type cutters on other, and protective cover for blades. Shpg. wt., 6 az.

SP-144

## TELEPHONE PICKUP FOR RECORDING TELEPHONE CONVERSATIONS

Not 1 .95





METAL STORAGE CANS NEW LOW PRICE .39 ea in lots of 6

Can holds 7" reel. Best protection for valuable recordings. Handsome finish of hammertone enamel. Cans ribbed for stacking. Precision fit makes apening and classing easy. Shop. wt. 8 az.

Lots of 6, ea. .39 - Singly, ea. .41





## (A) METAL TAPE STORAGE CHEST

STANDARD CASE: Sturdy all steel corrying case. Holds 12-7" or 5" reels and cons. Twin snap locks for positive clasure; perfect portability. Guards against exposure and occidental erase. Platinum gray hammerloid finish. Metal separators between reels. Includes index cards. Shpg. wt., 5 lbs.

(B) 7 INCH EMPTY PLASTIC REELS Individually boxed fine plastic reels for recording tope.

M5-267 In lots of 6, eq. .38, Singly, eq. .45

## HIGH FIDELITY RECORDING TAPES

ALL LAFAYETTE TAPES SOLD ON MONEY-BACK GUARANTEE @ GUARANTEED FIRST QUALITY SPLICE-FREE 1200 FT .- 7" REEL-ACETATE BASE 1800 FT.-7" REEL-MYLAR BASE AS LAFAYETTE LOW LOW AS AS 1.49 2.75 RT-10 LAFAYETT AS AS LOW LOW AS AS 1.88 RT-13 CASE OLD THE TAIL RT-11 2400 FT .- 7" REEL-MYLAR BASE

1800 FT .- 7" REEL-ACETATE BASE

## - You Be The Judge! -NEW! MYLAR BASE RECORDING TAPE

Lotoyette's huge purchasing power makes it passible to provide you with first-quality tape at about half the price you would pay for the same tape with the manufacturer's own labels. WE GUARANTEE ABSOLUTE SATISFACTION OR YOUR MONEY BACK. These splice-free mylar base recording tops are quality manufactured to assure uniformity of frequency response and complete obsence of drop-outs, to addition, they are sattemety durable and break-resistant and are capable of withstanding temperature and humidity changes. The wide frequency response characteristics combined with low and humidity changes. The wide frequency response characteristics combined with low noise level and long playing time opens new horizons of recording possibilities for the high fidelity enthusiasts as well as professional sound engineers. Av. Shap. wt., 12 oz.

RT-12 1800 ft. on 1 mit Mylor base. 7" reel diameter. Lots of 5, Ea. 2.75 Singly, Ea. 2.85 RT-13 2400 ft. on 1/2 mil Mylor base, 7" reel diameter Lats of 5, Eo. 3.49 Singly, Eo.

## ACETATE BASE RECORDING TAPE

These popular high quality topes are coated uniformly with red axide an plastic base with high autput and uniform frequency response covering the entire audio spectrum, 40-15,000 cps, completely splice-free. Another Ladoyette autstanding volue for oli hi-fi recordists, backed up by our Money Back Guarantee. Using 7½ cps dual track, 1200 ft. reel provides 1 hr. of recording time while 1800 ft. reel provides 1½ hr. of recording time.

RT-10 1200 ft. on 1½ mil ocetate base, 7" reel.
Lots of 5, Eo. 1,49 Singly, Eo. RT-11 1800 ft. on 1 mil acetate base, 7" reel. Lots at 5, Eo. 1.88 Singly, Eo 1,98

## LAFAYETTE RECORD CHANGER SALE!

## MONARCH 4-SPEED STEREO RECORD CHANGER

FULL INTERMIX IN ANY ORDER

PLAYS BOTH STEREO & MONAURAL RECORDS

SPECIAL SALE!

22.95

Complete with Storee Turnever Cartridge

18.95 Complete with Monaural Crystal Turnover Cartridge

The newest British-made Monarch, specifically made for stereo, Notable features is the law mechanical noise (rumble) and heavy-duty 4-pole induction motar. Fully automatic design and simple construction ensures trouble-free operation and long life.

PK-285 Monarch Stereo Changer, camplete with compatible stereo costal turouser cartificia.

PK-285 Monarch Stereo Changer, complete with compatible stereo
Crystal turnover cartridge Not 22.95
MOMARCH 45 RPM Spindle Not 1.88
WOOD MOUNTING BASE cut to fit above. Blande or MahaganySpecify finish Not 3.95
PK-144 Monarch changer with manageral cartridge Net 18.95

WOOD MOUNTING BASE
specify finish
specify flaish
MC-144 Monorch changer with manaural contridge



## NATIONALLY ADVERTISED CHANGER

Tremendous Buy for Stereo!

STEREO AND MONAURAL CARTRIDGES

38.50 Regular Special 23.50 Only \$5.00 Down



A superb value for the "sterophile" — Top name brand, 4-speed sterea changer with tone-arm which will accept all standard stereo cartridges. Automatic intermix handling of recards, muting switch far soundless change cycle, automatic shul-off after last record. Rim-weighted turn-table, heavy-duty 4-pole shaded-pole motar far top quality reproductioh. If you don't agree that this changer is a top buy — your maney will be refunded. Changer measures 12½" x 13½" with 5" clearance above and 2 11/16" below matarboard. Shpa, wt., 21 lbs.

PK-275 Record Changer (less base and cartridge)

PK-275 Record Changer complete with Ranette's famous compatible stereo turnover cartridge with twa sapphire styli (.75 & 2.5 mils)

PK-277 Record Changer complete with E-V's top-quality magnetic turnaver stereo cartridge (26MDST) with diamond (.7 mil) and sapphire (3 mil) styli

PK-278 Record Changer with E-V's well-known compatible crystal turnover stereo cartridge (26 DS). Diamond stylus (.7 mil) far stereo discs and LP's; Sapphire tip (3 mil) far 78's

Net 34.50

PK-111 Wood base for above, specify mohogany or blands. Shpg. wt., 5 lbs.

Net 3.95



## NEW DYNAKIT MARK III 60 WATT POWER AMPLIFIER KIT

PRE-WIRED PRINTED CIRCUIT ASSEMBLY

. MATCHED PAIR PREMIUM TUBES . CHOKE FILTERING TO MINIMIZE NOISE

Compact 60 watt basic amplifier designed for tinest listening quality in modern hi-fi installations. Pre-wired printed circuit assembly with parts mounted assures carrect trouble-free construction in as little as three hours. Accurate and simple bias setting independent of meter occuracy. Balancing ar critical ad-justments are not required to meet performance specifications. Frequency response better than ± .5 db fram belaw 6 cps to above 60 kc. Response at any level up to 60 watts is ± .1 db over o range in excess of 20 cps to 20 kc. IM distartion less than 1% of 60 watts, .5% below 50 watts and .04% at average listening levels. Less than 1% harmonic distortion within 1 db af 60 watts from 20 cps to 20 kc. Excel-tent transient response on pulses, square waves, etc., and noise 90 db below maximum. 4, 8, and 16 ohm outputs. Utilizes 1 6AN8, 2 KT88 (or 6550), 1 GZ34 and selenium rectifier. Washable, chip-proof vinyl coated finish on cover. All parts, tubes and protective cover included in kit. Shpg. wt., 28 lbs.

No. 79.95 MARK III 60 Watt Amplifler , Completely Wired and Tested MARK III-70 KIT WITH 70.7 VOLT OUTPUT FOR P.A. USE



## NEW! DYNAKIT HI-FI PREAMPLIFIER KIT

PRINTED-CIRCUIT MODULE

• 5 INPUTS — 2 OUTPUTS • 4 A.C. CONVENIENCE OUTLETS

INTEGRAL D.C. HEATER SUPPLY

A quality preamp-control unit incorporating factory-wired printed-circuit module for easy and occurate assembly. Current and voltage feedback loops include four stages of gain. Inputs: Low-level magnetic cartridge, high-level magnetic, radio, TV, tape, plus "ispecial" low level (option of extro RIAA phano input, tape head, or mike). Outputs: Tape and audio output. Controls: Satarc-equalization, bass, treble, volume, tape monitar, loudness, hum-balance. Tone-Control Ranget ±14 db @ 20,000 cps, ±20 db @ 20 cps. Phono Equalization: RIAA, 78 rpm, original LP (occuracy ensured by use of 1% components). IM Distortion: Less than .05%, unchanged at any setting of volume control. Responses: ±0.5 db 6.00,000 cps. Gain: 54 db @ 1000 cps (RIAA input), 20 db @ 20.20,000 cps (High-level input). Impedances: 1000 ohmi coutput), 500,000 ohms or higher (terminoting). Tubes: 2-ECC/12AX7 plus setenium stack. Power Requirements: 200-400 volts d.c. @ 3-4 ma.; 6 volts a.c. @ .75 amps. Size: 2½" high x 12" wide x 6" deep. Shpg. wt., 7 lbs. Chaice of bone white or charcoal brown vinyl finish.

vinyl finish.

Dynakit Preamplifier Kit
Accessery Kit for Panel-Mounting
Dynakit Dual Preamp Power Supply, PS-1



Lafoyette's new Super-Sensitive 4 Transistor Telephone Pick-up Amplifier with class "B" push-pull output for efficient speaker operation. Permits the whole family to enjoy phone conversations. Invaluable on long distance calls, as well as for group listening an business calls and conferences. No need for only a sense of the pickup call under the telephone cradle base, or in case of metallic extension phonest Just place the pickup call under the telephone cradle base, or in case of metallic base, near phone receiver and you'll marvel at how loudly and clearly the two-way conversation comes base, near phone receiver and you'll marvel at how loudly and clearly the two-way conversation comes base, near phone receiver and you'll marvel at how loudly and clearly the two-way conversation comes through the speaker. Uses transistors, 3 transistor addia transformers, speaker, valume centrol, an otractive all parts including 4 transistors, 3 transistor addia transformers, speaker, valume centrol, an otractive all parts including 4 transistors, 3 transistor addia transformers, speaker, valume centrol, an otractive all parts including 4 transistors, 3 transistor addia transformers, speaker, valume centrol, an otractive all parts including 4 transistors, 3 transistor addia transformers, speaker, valume centrol, an otractive all parts including 4 transistors, a transistor addia transformers, speaker, valume centrol, an otractive all parts including 4 transistors, and transistors are transistors. The kit comes complete with the value of transistors and transistors are transistors. The kit comes complete with the value of transistors and transistors and transistors are transistors.

"Interval transistors are transistors and transistors are transistors and transistors are transistors. The value of transistors are transistors and transistors are transistors. The property of transistors are transistors and transistors are transistors.

"Interval transistors are transistors and transistors are transistors."

"Interval transistors a

Not 1.30 Not 1.95 KT-131 Complete Kit Less Battery & Pickup Coil BATTERY 9 Volts RCA VS305 or Equivalent MS-16 Telephone Pichup Cell ... BATTERY 9V. BURGESS #2N6 Net 1.30 Nationally Advertised

4-SPEED CHANGER COMPLETE WITH THE BRAND NEW VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE





ANOTHER FABULOUS BUY of Lotayettel This is a brand new current changer made by a famous manufacturer plus the new General Electric VR-22 stereo cartridge, offering the finest reproduction from both stereo and monoural records. This cartridge features 20.17,000 cps. response, and a .7 mil. diamond needle. Up to 30 db separation between channels, tracks at 5 to 7 grams. This combination is priced so low that we DARE size records, a multing switch, click filter, and automatic shutoff after the last record is played. The heavy produce even, smooth tarque with no speed variations: there is practically no wow, no flutter, no rumble. And don't forget Ladayette's MONEY BACK GUARANTEE if you don't agree that you have received an board. Shape, wt., 21 lbs.

PK-330 RECORD CHANGER (less wood base) with New GE VR-22 (.7 mil) Diamand Stereo Cartridge. Net 29.5%

PK-252 RECORD CHANGER with Pickering Stereo 371.7D diamond cartridge

## COLLARO CHANGER

WITH "STEREOTWIN" STEREO CARTRIDGE

REGULAR CATALOG PRICE

COLLARO TSC-740 ELAC "STEREOTWIN" MAGNETIC STEREO CARTRIDGE WITH 0.7 MIL DIAMOND STYLUS

Reg. Cor. Price 86-15

HERE IS A MOST UNUSUAL BUY! You get the latest model 4-speed Collaro deluxe record changer, Madel TSC-740, with outstanding styling, dynamically-balanced and damped 2-piece tone arm, automatic intermixing of 7", 10" and 12" records stacked in order of decreasing size, automatic shut-off after last record, automatic or manual operation and jam-proof quality mechanism. With the changer you also get the famous ELAC VARI-ABLE RELUCTANCE "STEREOTWIN" CARTRIDGE, with superior low-hum performance, response of 30-18,500 cps ± 2 db, high autput of 25 millivolts for excellent signal-to-noise ratio, high compliance of 4x10-5 cm/dyne, and 0.7 mil diamond stylus. THIS IS A QUALITY COMBINATION—AT A PRICE THAT CAN'T BE BEAT! Shpg. wi., 20 lbs.

PK-279—Collaro TSC-740 with Elac Magnetic Steree

PK-271 WOOD BASE-Similar to PK-111 but genuine walnut wood and finish. Shpg. wt., 6 lbs..

## "MAGIC BRAIN" TV REMOTE CONTROL



## NEW PURCHASE!

For all KC596, KC597, and KC566 thru KC592 Series Chassis — Over 200 Different RCA Models! Control your RCA TV set from any remate spat in the raom (up to 30 ft.) without getting up or tauch-ing the receiver Alsa perfect far bed ridden or physically handicapped persons who cannot get around easily.

ound easily.

around easily.

Here is what the remote cantrol can do: (1) TURN SET ON; (2) SELECT DESIRED CHANNEL; (3) ADJUST THE VOL.
MME; (4) ADJUST PICTURE; (5) ADJUST FINE TUNING; (6) TURN SET OFF. A single compact unit that firs the palm of yaur hand, gives you all this control from your easy choir. The flat interconnecting cable is easily conceoled under the carpet or along the floor baseboard. Installation of all other components is made at the receiver. Components include Relay Chassis, Motor Bracket Assembly, Remale Control Head and Coble, Switches, Mounting Strops, Terminal Board, Resistors, Capacitors and Nean Lamp. Detailed installation instructions included. Shpg. wt., 10 lbs. Lamp. Detailed installation instruction wt., 10 lbs.
TL-46—RCA No. 274 Remote Control

10 WATT PUSH PULL HI-FI AMPLIFIER KIT



SELECTOR SWITCHES PERMIT CHOICE OF THREE INPUTS

SEPARATE BASS AND

4, 8 AND 16 OHM

EASY-TO-FOLLOW

This new, economy hi-fi amplifier has many deluxe features for exceptional performance. The three inputs are radio/crystal phano pickup, magnetic phano pickup and microphane. A selector switches the input from radio/crystal to microphane or magnetic pickup, depending upon the position of a rear open side switch.

OUTPUT — Earled 10 warrs, peak 18. PREQUENCT RESPONSE — ±1 db 30. 15,000 cps. DISTORTION — 1.5% harmonic, 4% intermeduation on 8 warts. 4 CONTROLS — Input Selector; Valume; Treble; Power-On-Ofi-Soss, TREBLE CONTROL — Flot response up to 15 db boost. 8ASS CONTROL — Flot response up to 15 db

## POWER/ISOLATION TRANSFORMER



AND RECEIVERS
12 PAGE BOOKLET DESCRIBING USES

AC LINE CORD AND PLUG IN

PRIMARY REDUCES SHOCK HAZARD IN

AC-DC EQUIPMENT

TR-91-TRANSFORMER

## NEW! 6 TRANSISTOR SUPERHET RECEIVER with LATEST NPN-PNP TRANSISTORS

GE 2N188A AUDIO OUTPUT TRANSISTORS . 100% SUBMINIATURE PARTS - NO COMPROMISES!
CLASS B PUSH-PULL AMPLIFICATION-PLENTY OF POWER. . FOR GROUP AND PRIVATE LISTEMING
LABORATORY DESIGNED - SENSITIVE, SELECTIVE, STABLE!



Superb Performance! Incomparable Value! Transistor-wise Latayette proudly presents its newly revised 6 Transistor Superhet Receiver Kit KT-119A. Transistor-wise Latayette proudly presents its newly revised 6 Transistor Superhet Receiver Kit KT-119A. This Improved model uses the latest GE NPN-PNP Transistors in an ingeniously engineered, laboratory tested circuit providing superb performance and an amazing superior commercial quality. The circuit features a specially matched set of 3 if transformers, Oscillator Coil, High-Q Loop, Closs 8 Push-Pull Audio Amplification and optimum Transformer Coupling in audio and output stages. Mos efficient 2½ specker for exemplary reproduction and earphone lock for private listening. Complete with all parts, transistors, pre-punched chaisls, but less battery and leather case. New 28 page easy-to-follow step-by-step instruction book. Size 6 x 3½ x 1½ s. Shop, wt., 3 lbs.

KT-119A. Complete Kit-Lev Coulon Better.

KT-119A — Complete Kit-Less Case and Battery. BATTERY PV BURGESS 2N6.

## DIAMOND STYLI AT LOWEST PRICES ANYWHERE

## LAFAYETTE DIAMOND and DIAMOND-SAPPHIRE STYLI

MADE FOR LAFAYETTE BY THE FOREMOST AMERICAN MANUFACTURERS

## KEY TO POINT CODES HOW TO ORDER

explained in the table below.

LP = SINGLE 1 MIL MICROGROOVE FOR 331/3 AND

AG = SINGLE 2 MIL ALL GROOVE FOR ALL SPEEDS

ST = SINGLE 3 MIL STANDARD FOR 78 RPM

COMB - DUAL -1 MIL DIAMOND AND 3 MIL SAPPHIRE Identify your needle by cartridge number and illustration and order by stock no. Nate that all

## ALL DIAMOND STYLI ARE NOT ALIKE

The symbols in the column headed "PT SIZE" are Only Lafayette's Superior Diamond Styli are MADE FROM WHOLE DIAMONDS • PRECISION
GROUND AND POLISHED • VERTICALLY AND
EDGEWISE GRAIN ORIENTED

• SHADOWGRAPHED

FULL I YEAR GUARANTEE ANY DIAMOND or DIAMOND-SAPPHIRE NEEDLE IN THIS LISTING

## all needles listed here are for monaural cartridges. " SIL

	27	
	DIAMOND NEEDLES	the state of the s
STOCK SIZE   REPLACES   REPLACES   JENSEN NO.	STOCK SIZE NO. PT. FIG. CARTRIDGE REPLACES JENSEN NO.	NO. PT. FIG. CARTRIDGE REPLACES
FOR ADMIRAL CARTRIDGES	FOR MAGNAVOX CARTRIDGES	FOR RONETTE CARTRIDGES
PS-10 LP 1 409A11, 4D9A300, 98A54-1 JPS-30LPD	PS-35 LP   54   560176, 560180   CRA-55LPD	P5-35° LP 53 (TO-200, TO-222, TO-284, OTO CRA-SSLPO
P5-16   COMB   6   409821   JP5-3550   P5-17   LP   7   409A30   ABILPD	P3-70   COMB  51   560161   5-665D	P5-69 LP 54 (series. TX88, A CRA-S6LPD
	FOR PHILCO CARTRIDGES	*The open end type (Fig. 54) replaces both Fig. 53 and 54
FOR ASTATIC CARTRIDGES	PS-S6   COMB  431 45-9612, 76-4649, 425-0016   PH-135D	FOR SHURE CARTRIDGES
PS-20 LP 3   AC Series, 40T, 41T, 40-1, 41-1   A-75LPD	P5-56 COMB 43 45-0009, 425-0011, 425-0014 PH-135D	ar at   comp   4 ( WC10, WC100, PC2 series, PC3   3P5-3550
PS-23 LP 12 408 M-70LPD		Series, PC4 series, PC3 series
PS-25 COMB 14 GCD, 409, 55-T, 55TJ, 55TM A-715D	FOR PERPETUUM EBNER CARTRIDGES	( P-72, P-73, P-73R, P-75, P-76,
PS.23 LP   12   410   M.70LPD		PS-10 LP 1 P-77, P-80, W-21, W-21AR, JPS-30LPD
( (AC, CQ, CQ-1, LQD, LQD-1, QT,	P5-64 COMB 47 P17/RG RX5505D P5-65 COMB 48 PE-8, PE10 RX5515D	{ W-22A, WC-24, WC-25 Series
PS-17 LP 7 OT.33, 44-T, 46-1, 48-1, A-B1LPD	PS-65 COMB 48 PE-8, PE10 RX5515D PS-66 LP 22 P7000 (MJ, MD) (LP only) RX552LPD	FOR SONOTONE CARTRIDGES
If 166T Series	P3-00   [P   12] 17000 (m1, m0) (et am)	
PS-35 LP 54 3127, 420, 427, 4275 series, 310T, 310-1, 310-1, 310-18, TS, 312-TB,	FOR R.C.A. CARTRIDGES	P5-70 COMB 51 27-LB-D, 27-LB-S, 27-LB-SD, 9980-S, 9980-SD, 9980D, 57, 5-66SD
(15, 414-1	PS-23 LP   174 74067   M-70LPD	ST-LB-S, ST-LB-SD
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	PS-32 COMB 51 3T, 3TS, 3TD 5-6150
FOR MAGNAVOX CARTRIDGES	P5-10 LP 1 55652,76257,(988370-1),75044 JPS-30LPD A-75LPD	FOR WEBSTER ELECTRIC CARTRIDGES
\$ 560176, 560180	P5.70 COMB 51 78748, 79807, 100653 5-665D	PS-17 LP   7   NX   A-81LPD
P5-51 COMB 37 360133, 560151, 560169-1, M-505D	PS-25 COMB 14 100329 A-7150	P5-10 LP 1 F11 JPS-30LPD
1 1 ( )001/0	11 F3.23 COMB. 14 10031	

## REPLACEMENT STYLI FOR GE CARTRIDGES

Direct replacements for clip-in styli in GE VR 11 saries models 4G-050, 4G-052, Exact replacement for all old type single needle GE cortridges.

4G-053, 4G-040, 4G-041, 4G-063, 4G-061 cortridges.

4G-053, 4G-052, Exact replacement for all old type single needle GE cortridges.

4G-053, 4G-040, 4G-041, 4G-063, 4G-061 cortridges.

4G-053, 4G-040, 4G-041, 4G-063, 4G-061 cortridges.

4G-053, 4G-040, 4G-041, 4G-063, 4G-061 cortridges.

4G-050, 4G-052, Exact replacement for all old type single needle GE cortridges.

4G-052, 4G-040, 4G-041, 4G-063, 4G-061 cortridges.

4G-053, 4G-040, 4G-041, 4G-063, 4G-062, 4G-FOR GE VR II CARTRIDGES (FIG. 35)

MODERNIZATION ASSEMBLIES (FIG. 33)

Modernize your ald triple-ploy cartridge. These assemblies replace both the old and new series "A." Once installed, you can replace one point of a time.

01AMOND SAPPHIRE Replaces old RPJ-013 and new RPJ-013A. PS-46-list 31,00 DUAL DIAMOND, Replaces old GE RPJ-012 and new RPJ-012A.

STYLI FOR OLD TYPE GE CARTRIDGES (FIG. 32)

Net 3.49 DUAL DIAMOND For old type GE cortridges not using clip-in 78 points.

FOR GE SERIES A CARTRIDGES AFIG. 341

Individual styli replacements that clip in to all GE "A" Net 7.95 PS-47-Diamond 1 mil (LP) replaces GE RPJ-010 PS-543-Sopphire 1 mil (LP) replaces GE RPJ-015 Net 2.10 PS-542-Sopphire 3 mil (78) replaces GE RPJ-035

DIAMOND STYLI FOR 6)

AS LOW AS

With this handy, small mixer you can announce titles

before playing records, mix two high impedance micro-phone inputs or perform any other mixing operation where 2 high impedance input channels are converted to

a single mixed high impedance input channels are converted to a single mixed high impedance input channel. Each input channel has its own easy acting level control for quiet mixing; all mounted in shielded, chrome ploted housing. Has 2 RCA type female input jacks and one male RCA plug an output side. Overall size 24" x 14" x %". Shpg. wt., ½ lb.

PK-239 AUDIO MIXER

3 SPEAKER

SELECTOR

**SWITCH** 

## STEREO DIAMOND STYLI AT LAFAYETTE'S LOW PRICES!

FOR RONNETTE cartridges OV, OV1, T1 and single BF40
PS-81





## RECORDER PATCH CORD




IDEAL FOR MAKING CONNECTIONS FROM RADIO, PHONO OR TV TO TAPE RECORDER.

Mondy 6 ft. lead has insulated alligator clips at one end and RCA phana plug at the other. Supplied with shielded phonoplug adapter to adapt the RCA phana plug if necessary. Attach alligator clips to speaker terminals and simply plug other end into tape recorder, Ideal for recording from Radia, Phona or TV. .67

MS-565

## NEW! EXCLUSIVE LAFAYETTE STYLOCHRON



PK-224

• PROTECT YOUR PRECIOUS RECORDINGS.

> MORE GUESS WORK -KEEPS AN ACCURATE RECORD OF NEEDLE USE.

More precious recordings are ruined by tardy replacement of the needle than by any ather cause. Naw, there is no of the needle than by any ather cause. Naw, there is no the needle this happen, especially to your doubly precious need to let this happen, especially to your doubly precious need to let this happen, especially to your doubly needle has been in use so that you can have tong your needle has been in use so that you can replace the worn needle at the proper time, before it and replace to your records. The Stylachran is quickly and replace the worn needle at the proper time, before your record. The Stylachran is quickly and replace. The moment your record changer or furnished easily mounted on your your record changer or the late. Did the turnished to the stylachran begins to register. It stops when only time haw long you have been using the needle. Did the turnished of it not have been using the needle. Did not the turnished of the your units. You can remove your stylustive importance of the lace place is 2%. Estends 1% below to rehind ponel. Complete with instructions. Shop. Wet. 29.

LAFAYETTE HIGH FIDELITY STEREO- MONAURAL TEST RECORD

 TESTS RUMBLE EACH CHANNEL TESTS LEVEL EACH CHANNEL TESTS BALANCE • TESTS EQUALIZATION • STYLUS WEAR TEST • TESTS RESO-

NANCE . HELPS TUNE BASS REFLEX BAFFLES

NANCE • HELPS TUNE BASS REFLEX BAFFLES

A Lotayette exclusive to help you check both stereo and monoural systems. For stereo testing this two-sided 12"

L.P. stereo record has on its stereo side two 1000 cycle bands to check the level of each channel separately; separate RIAA equalization check for each stereo channel in 8 steps from 30 to 10,000 cycles; botance check to set the level of each channel using special metraname recording; rumble test for each channel. There are stylus wear test groaves an both outer and inner edges of each side to check both stereo and monaural styli. For manaural testing it provides an RIAA equalization test in 9

steps from 30 to 15,000 cycles, a continuous glide band from 30 to 15,000 cycles, to test for resonances of tone orm or of cobinet and a 300 cycle to 20 cycle step band to tune baffles. The periodic use of this record to check on your equipment performance will easily pay off by catching any costly deficiencies or by diagnosing foults and errors. A terrelic value and a "must" for the Hi-Fi enthusiast. Cames with camplete instructions for use Shpg wt., 1 lb.

PP. 14



SPECIAL STYLUS INSPECTION MICROSCOPE

With this pocket-sized inspection microscope you con examine your stylus tip for signs of wear, imperfections, general condition. Its 50X magnification is enough to provide a good, cleor image for observation. The "objective" end has a curved metal guard which reflects light source for strong illumination; the slit in the guard also enables the centering of stylus in microscope field. Con be used with any stylus. Has adjustable objective lens.

Size 31%" long x 1/2" diam. Shpg. wt., 8 az. PK-237



LAFAYETTE SPECIAL VALUE STYLUS PRESSURE GAUGE

With the odvent of stereo records, correct stylus pressure becomes all important in obtaining the best reproduction and least stylus and record wear. Lathyette's stylus pressure gauge is an accurate device that allows you to read with the pickup in normal ptoying position. Range, 0.30 gm. No spring and minimum moving parts. Shpg. wt., 1 lb.

## 000000 **Convenient Screw Connections Easily Panel Mounted**

PK-242

MINIATURE HI-FI AUDIO MIXER



PK-243 AUDIO MIXER—Same quality and characteristics os PK-239 except output is standard Female Mike Connector. Inputs consist of 2 Male Mike Connectors. Size 2%" x 1%" x %" overall. Net 1.75



SINGLE HOLE MOUNTING 15c ea.10 for \$1.35

RCA type female input jack. Mounts securely in single %" hale by means of lacknut on jack. Screws, nuts MS-568 ...... 10 for 1.35 singly eq. .15





10 handy 14" leads with miniature insulated offigo-tor clips attached to each end. Clips and leads color coded, 5 pairs each a different color, Ideal for serv-

## NEW LAFAYETTE-GOODMANS 3-WAY EXTRA-VALUE HIGH FIDELITY SPEAKERS

● 11/4 LB. TO 61/4 LB. MAGNETS OF "ALCOMAX"—THE MOST EFFICIENT MAGNETIC MATERIAL AVAILABLE! ● FREE-EDGED CONE SUSPENSION MADE BY EXCLUSIVE GOODMANS PROCESS • 12" AND 15" MODELS, ALL 3-WAY WITH SMOOTH LOW-, MID- AND HIGH-FREQUENCY COVERAGE • ALL MODELS HAVE SPECIAL LOW-RESONANCE WOOFER CONES, STIFF MID-FREQUENCY RADIATOR COMES, COMPRESSION-DRIVER TWEETER HORNS • FREQUENCY RESPONSE 30-20,000 CPS • HIGH POWER-HANDLING CAPACITY ● HIGH EFFICIENCY WITH LOW-DISTORTION TRANSIENT RESPONSE ● WIDE DISPERSION-ANGLE TWEETER WITH SELF-ALIGNING

ALUMINUM VOICE COIL & DIAPHRAGM • PLUG-IN 12 DB/OCTAVE CROSSOVER NETWORK WITH HIGH FREQUENCY LEVEL CONTROL

SUPPLIED WITH ALL MODELS

SUPPLIED WITH ALL MODELS

LAFAYETTE went to this leading English speaker monufacturer for these outstanding custom speakers to provide you with this SUPER-PERFORMANCE VALUE by direct importation. These speakers are all 3-way units, with wasfer, indi-range radiator and tweeter all axially mounted to provide an efficient, low distortion, wide-range speaker system. Available in 12" and 15" models, all speakers employ extremely heavy Alcomax magnets—the most efficient magnetic material available—for converting electrical impulses to sound with minimum distortion, especially with musical program material. In the exclusive Goodman process used in manufacturing the woofer canes af these speakers, the cane rolls and cone edges are bombarded with minute particles of specially-blended plastic ma-


terials to form a virtually free-edged cane suspension without the usual joint faults faund in so-celled free-edged canes and eliminating standing waves and surround resonances. Frequency response of all models is 30-20,000 cps, voice cails are all 16 ohms. Free-oir wooder cane resonances are 25 cps for 15" models, 35 cps for 12" models. At 2000 cps the stiff-caned mid-frequency radiator provides smooth mechanical crossover; the compression driver tweeter has a rigid plastic harn with 2½" circular mouth, 1" diameter aluminum voice cail and diaphragm in a self-aligning assembly with an air chamber and phose equalizer and utilizes the plug-in 12 db per actave electrical network for smooth crossover at 5000 cps. The network has a high-frequency level control with attractive escutcheon and knob.

MADE BY THE FAMOUS GOODMANS English M'f'r Of Some Of The

World's Best Hi-Fi Speakers! CUSTOM BUILT TO LAFAYETTE'S OWN RIGID SPECIFICATIONS

Guaranteed SUPER PERFORMANCE -YOU BE THE JUDGE! SATISFACTION OR YOUR MONEY BACK

ONLY 10% DOWN EASY TIME PAYMENTS



NETWORK & L-PAD LEVEL CONTROL

SK-110 3-WAY 12" SPEAKER

Another highly efficient integrated 12" 3-way speaker system with response of 30-20,000 cps, cone resonance 35 cps, and power rating of 30 worts program material; dimensions 7" overall depth, 12½" diam. Magnetic flux density 11,500 gauss; total flux 129,000 maxwells. 1½"

● 12" SPEAKER WITH 30-WATT POWER RATING ● 15" 35
WATTS ● WITH PLUG-IN 12 DB PER OCTAYE L/C (ROSSOVER
Goodmans speakers on this page. Shyg. wt., 20 lbs. 5K-110-12" 3-way speaker with 1% lb. magnet. Net 47.50

Only 44.50 Eq. Net SK-111-3-way 15" with 1½ lb. magnet. Same as SK-110 but 15" speaker, with power reting of 35 watts and cone researance of 25 cps. 7" deep, 15%" overall diameter. Shpg. wt., 25 lbs. Net 54.50 GET 2 FOR STEREO .. Only \$1.50 Ea. Net

1% LB. MAGNETS 30-WATT 12" 47.50 35-WATT 15" 54.50

L/C Crossover with L-Pad

## LAFAYETTE-GOODMANS 31/2 LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

● 40 WATTS POWER RATING OF 12" SPEAKER ● 15" 45 WATTS 

HEAVY DIE-CAST NON-RESONANT FRAMES 

12

DB PER OCTAVE CROSSOVER WITH L-PAD HIGH-FREQUENCY
LEVEL CONTROL

25-35 CPS WOOFER RESONANCE

## SK-112 3-WAY 12" SPEAKER

SK-112 3-WAY 12" SPEAKER
This is a 3-way integrated 12" speaker system whose performance can only be compared, in other makes, to the very best available. The superior efficiency of the 3% lb. Alcomax magnet with total flux of 185,000 maxwells plus the excellent constructional details, the exclusive Goodmans cane banding and treatment process, the 35 cps cone resonance, the superb Goodmans horn-laaded compression-driver tweeter, the heavy, non-resonant die-cast metal trame—all are combined to provide another LAEAYETTE SUPER-PERFORMANCE VALUE, made possible only by its

custom specifications and by direct importation to save you money. Specifications are similar to the other Lafayette-Goodmans 12" speakers listed on this page, except power rating is 40 worts program material, valce call diam. Is 134" and overall depth is 814". Shpg. wt., 25 lbs. SK-112-12" 3-way speaker with 3½ lb. magnet Net 69.50

Only 63.50 Ea. Net

GET 2 FOR STEREO

SK-113—3-way 15" with 3½ lb. magnet. Same as SK-112
but 15" speaker with 25 cps cane resonance, power rating
of 45 watts, voice call dlameter 2", total flux 201,000
maxwells, 8½" deep, 15%" diam. Shpg. wt., 30 lbs.

Net 79.50

GET 2 FOR STEREO

3% LB. MAGNETS 40-WATT 12" 69.50 45-WATT 15" 79.50 Only 72.00 Ea. Net Crossover Network 12 db /Octave with L-Pad Control

GET 2 FOR STEREO





## LAFAYETTE-GOODMANS 6% LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS ● 12" SPEAKER HAS 45 WATT POWER RATING ● 15" 50

WATT . COMPLETE WITH PLUG-IN 12 DB PER OCTAVE L/C CROSSOVER NETWORK & L-PAD LEVEL CONTROL . HEAVY, DIE-CAST NON-RESONANT FRAMES

## SK-114 3-WAY 12" SPEAKER

A highly-efficient 3-way 45-wott speaker for faithful re-production of the complete audible spectrum without tone coloration or distortion. Response 30-20,000 cps. Has ex-clusive Goodmans special process woofer cone with 2" diameter aluminum voice call and cone resonance of 35 cps, 6/4 lb. Alcomax magnet [the most efficient magnetic material available], stiff-coned mid-range radiator with 2000 cps mechanical crossover, and harn-loaded compres-sion-type tweeter with self-aligning aluminum voice call and diaphragm. Magnetic flux density is 14,500 gaussy

total flux is 227,000 maxwells. Supplied with 5000 cps plus-in 12 db per octave electrical network with high frequency level control. 16 ohms impedance. Roted at 45 worts power handling capacity with integrated program material. Ruggedly constructed heavy die cast metal freme minimizes frame resonances; with screw terminals for easy connections, socket for plug-in crossover network and level control harness. Dimensions: 8½" overall depth, 12½" diam.; tokes 11" diam. boffle opening. Shpg. wt., 35 lbs. 5K.114—12" 3-way speaker with 6½ lb. magnet. 5K-114-12" 3-way speaker with 61% lb. magnet.

Only 73.50 Eo. Net

GET 2 FOR STEREO Only 73.50 Eo. Net
SK-115—3-way 15" with 6½ lb. magnet. Same as SK-114
but 15" speaker, with power roting of 50 watts and cone
resonance of 25 cps. 8½" deep, 15½" overall diam.; requires 13" diam. baffle opening. Shpg. wt., 40 lbs.
Net 89.50

Only 82.00 Ea. Net GET 2 FOR STEREO

6½ LB. MAGNETS 45-WATT 12" 79.50 SO-WATT 15" 89.50

## 9.95 You be the Judge!

## NEW! LAFAYETTE 8" HI-FI SPEAKER

. "MECHANICAL 2-WAY" SPEAKER OF UNUSUAL DESIGN . EXTRA-HEAVY MAGNETS. EXTREMELY HIGH FLUX . RESPONSE 40-16,000 CPS . SPECIAL PATENTED CONE CONSTRUCTION AND MATERIAL FOR SMOOTH, DISTORTION-FREE RESPONSE · EXCELLENT FOR STEREO

A most unusual dual-cone construction is used in these extra-high-quality 8" speakers to economically provide the same type of wide-range frequency response narmally found only in true coasial speakers or multiple speaker systems. There are 2 separate cones, acting-through a common voice cait. The auter edge of the tweeter cone is attached to the mid-section of the waater cone; both cones "floot" on thexible, corrugated edges. This mounting, plus apertures provided behind the waafer cone, results in mechanical crossover so that both cones operate in phose of low frequencies, but only the tweeter cone operates of high frequencies. This gives improved high frequency directional

characteristics and minimum distartion. The potented cone materials provide extremely smooth reproduction. Magnets are large and heavy, with flux density of 10,500 gauss and total flux of 56,000 maxwells. Their high efficiency means good transient characteristics, low distartion, and good response at either high at low sound levels. Terminals are stored to the store of the stored to the store of the store

Only 18.95 Net

## 14.50

## NEW! LAFAYETTE DUCTED-PORT BASS REFLEX SPEAKER ENCLOSURE

• RECOMMENDED FOR STERED • NEW DESIGN FOR WIDE-RANGE RESPONSE IN A SMALL PACKAGE . ECONOMICAL-SPACE SAVING . FOR 8" OR 6" SPEAKER

An unusually-designed enclosure which extends low-frequency response to a remarkable degree. Incorporates a special long duct over the usual bass reflex part which acts tagether with the administration of response at low frequencies. Suitable for 8" or 6" wide-range or coaxial his speakers. Made all hardwood veneers throughout, hand-rubbed to a high finish. May be shelf high 18" with \$9" d. Shpg. wt., 15 lbs.

CAB-29 Blande Mahagany, Mahagany, or Walnut Enclosure.

Net 14.50

## FAMOUS LAFAYETTE SK-58 12" COAXIAL



· BUILT-IN CROSSOVER COMPLETE WITH
 BRILLIANCE CONTROL

SHEEPSKIN "FREE-EDGE" CONE MOUNTING

. 20-WATTS RATING . 1 1/4 LB. MAGNET

## LAFAYETTE EXCLUSIVE

This exclusive Lafayette import has became notlanally famous for its exceptional value. An extremely high quality speaker, with 1% lb, high-flux TSK-5 magnets, rugged and heavy metal frame, 12" waafer section with sheepskin edges and specially-response peaks. The coaxially-mounted 2½" high-efficiency sion af the high frequencies; with the built-in 3000 cps cross-aponse of 30-15,000 cps. Woost end coaxially-response of 30-15,000 cps. Woost end of the wide-range frequency rehandling capacity of the speaker is 20 wats continuous, 35 made to screw-cap terminals. If made in this country, this speaker would sell for at least \$49.50. Shap. wt., 11 lbs.

## ECONOMY HI-FI COAXIAL SPEAKERS



8"-\$6.25 12"-\$8.75 15"-\$13.75 6x9-\$7.95

ECONOMY 8"

COAXIAL HI-FI SPEAKER ● IDEAL WIDE-RANGE BUDGET SPEAKER ● PER-FECT FOR STEREO . RESPONSE 70-12,000 CPS BUILT-IN CROSSOVER . 10 WATT RATING . 3.16 OZ. MAGNET

OA. MAUNC:
A fine cooxial high fidelity speaker with built-in electronic crossover. Rated at 10 worts, with response of 70-12,000 cps. Rigid, non-resonant frame, high efficiency 3.16 oz. Alnica 5 magnet, specially-treated lang-life cone, and gasket-sealed magnet cover contribute to its fine performance. 8 ohm vaice coll. Shpg. wt., A the SK-92 LAFAYETTE ECONOMY SPECIALI Net 6.25

## COAXIAL SPEAKER

EXTENDED RANGE DUAL SPEAKER
SYSTEMI FOR FM OR AM RADIO,
TELEVISION, SOUND AND WIDE
RANGE RECORD PHONOGRAPHS.
QUICK, EASY, MODERNIZING REPLACEMENT OF OLD STYLE SINGLE
PLANCE SPEAKER. RANGE SPEAKERS.

12" Alnico V PM with 1" voice coil and heavy one piece cone. Specially designed 3" Alnico V PM tweeter completes this combination speaker, range 40 to 15,000 CPS. Built-in high pass filter. Installs same as regular PM speaker, anly two wires to cannect. 6.8 az. Alnica V magnet. Impedance 8 ohm. Wt. 8 lbs.

5K-93

## ECONOMY 15" COAXIAL HI-FI SPEAKER

• 5" TWEETER • BUILT-IN 1800 CPS CROSSOVER

• RESPONSE 45-12,000 CPS

This dual-speaker system provides clean, extended response of 45 to 12,000 cps. Includes 15" woofer with coaxially mounted 5" tweeter and built-in 1800 cps crossover. Heavy, non-resonant frame, anti-corrasion treated, 6,8 oz. Alnico 5 magnet, 8 ahm vaice cail. 20 watts power rating. Shpg. wt., 11 lbs.

SK-89 LAFAYETTE ECONOMY SPECIALI Net 13.75

## 6x9 "Twin-Tweeter" COAXIAL HI-FI SPEAKER . EXCELLENT BASS RESPONSE

BUILT-IN CROSSOVER

. ADD HI-FI TO AUTOS, TV, RADIO SETS

This 6" x 9" hi-fi cooxiol speaker opens new possibilities for high-fidelity reproduction. Compact enough for your cor, for radio and television sets—and for the high-fidelity enthusiast with a space problem. Twin high-frequency tweeters are designed to cross over mechanically at 5000 The excellent bass characteristics of the 6 x 9 wooder faithfully reproduce the low frequencies. High-energy Al-nico 5 magnet; voice call ½" diam. Power handling capacity 4 watts (7 watts on peaks). 4" deep. Impedance 3.2 ohms. Shpg. w1., 21/2 lbs.

SK-75 - 6" x 9" hi-fi speaker.

10.95

## ACOUSTIC BAND EXTENDER Converts Any 12" Hi-Fi Speaker To A Complete 4-Way System MOUNTS AXIALLY ON 12" SPEAKER

ELIMINATES EXTRA CARPENTRY


3-WAY INTEGRATED SPEAKER

FROM 1,000

to 18,000 CPS 25 WATTS RATING BUILT-IN CROSSOVER

BUILT-IN CROSSOVER


A real boan to the hi-fi enthusiast who has a single speaker and wants to extend the upper tanal range of his system and at the same time improve the vitol middle ranges for better realism and fuller enjayment. The Acoustic Band Extender includes 3 acoustic channels in one housing. One channel, tic Band Extender includes 3 acoustic channels in one housing. One channel, 1.3.5 kc, is a rear loading exponential dual flored harn energized by the loading dual horn, while the third channel, 3.5 to 18 kc, is a frontered of the driver diaphragm. The second channel, 3.5 to 18 kc, is direct free poeture loaded. Wide-angle sound radiation is assured by the design for operture loaded. Wide-angle sound radiation is assured by the design for thorough distribution of the added brilliance and presence supplied by this unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit. The driver unit has a highly efficient 3.2 ac. Antico 5 slay magnet unit and the state of SK-120



## LAFAYETTE 2-3 WAY SPEAKER SYSTEMS & ENCLOSURES

At Economy Prices - SAVE 25% to 50%

## HI-FIDELITY WOOFERS



## 15" HI-FI LOW FREQUENCY WOOFER

. 31.5 OZ. ALNICO MAGNET . 20 TO SOOD CYCLES-35 WATTS

This efficient 15" low frequency woofer incorporates many exclusive features. For ariginal equipment or replacement, it provides highly efficient extended low-frequency response. Ideal for assembling 2- and 3-way speaker systems. Handles 35 watts of audio power. Frequency response ± 2 db 20 CPS to 1000 CPS, And ± 5 db from 20 CPS to 5,000 CPS with proper boffling. Voice coil dia. 2", impedance 8 ohms. 31.5 az. Alnico Y magnet. Finished in beautiful brown enamel. Cane is seamless type, permanently bound to vaice coil. Shpg. wt., 13% libs. Cane Resonance 45 cycles

SK-67


Net 23.95

## 12" HI-FI LOW FREQUENCY WOOFER 21.5 OZ. ALNICO V MAGNET-25 WATT

Provides efficient, extended low-frequency response of ± 5 db from 35 to 8000 CP5, and features 25 wotts of power handling capacity. Perfect for high-fidelity installations or far modernization of older equipment. Ideal for assembling 2- and 3-way speaker systems at a budget price. Enclosed magnet structure—completely dust-proof. Compliance of outer cone and inner spider carefully calculated for best bass response. 21.5 oz. Alnica V magnet, 1½ dlo, voice coil, 8 ohm impedance. All exposed surfaces are finished in beautiful brown enamel. Shpa. wt., 8 lbs. Cone Resonance 50 cycles

Net 16.50

8" MID-RANGE WOOFER 6.50



A law frequency bass reproducer, free from distortion and capable of clean reproduction down to 40 cycles. Ideal for use with tweeters and crossover networks to make up a 2-way or 3-way system. Can also be used with additional speakers as a multi-speaker woofer. Perfect, too, as mid-range unit in low cost 3-way systems. Crossover at 350 CPS; frequency response 350-13,500 cycles, suitable for crossover to 5000 cycles. Impedance 8 ahms. Cane Resonance 150 cycles. Shpg. wt., 4 lbs.

Net 6.50



## GE 12" PM HI-FI SPEAKER

- MANDLES 25 WATTS
- . 14.5 OZ. ALNICO V
- MAGNET
- . FREQUENCY RESPONSE 50-15,000 CPS
- · ALUMINUM VOICE
- COIL

This GE deluxe speaker was designed by audio engineers, to meet the high standards of performance to extential to high-fieldity and for dependability and durability. The 14.5 or Alnice 5 magnet produces a dense magnetic field resultant optimum sentitivity and damping factors of the period of the 5K-60 Shpp. wt., 7 lbs.

## IMPORTED FROM DENMARK



ROYAL DANISH 12" DUAL CONE SPEAKER


Net 7.95

- . HIGH FIDELITY MODEL
- RANGE: 45-14,000 cps.
- . HIGH FLUX DENSITY

Latayetta brings you this fine imported high fidelity speaker at a fraction of the price you would expect to pay for so much quality. Two cones are mounted on a single axis, and provide remarkable wide range fraquency response from 45 to 14,000 cps. Reproduction of program material is exceptionally lifelike throughout the entire range. An exclusive, specjal formula cane rim treatment eliminates cone rim resonance and distartion. Also, the damping effect improves transient response and prevents "hangaver." Overall depth, 5-3/16". Campletely enclased, 1" diameter voice cail with an impedance of 6 ohms. Shops, wt., 6 lbs.


12" Dual Cone Hi-Fi Speaker ...... Net 7.95

CAB-16-17





LAFAYETTE UNIVERSAL HI-FI SPEAKER ENCLOSURES



## LAFAYETTE HI-FI SPEAKER ENCLOSURES FOR UNITARY 2-WAY-3-WAY SPEAKER SYSTEMS

## LAFAYETTE RESONATOR ENCLOSURES

THE CABINET—New, lowboy consolette resonator cabinet for 12" high fldelity speakers. Completely assembled and finished unit constructed of \( \frac{\pi}{n} \) stock of the finest genuine mahogany and walnut veneers. Solidly built and acoustically designed to provide wide range frequency response without reverberation or vibration. Cabinet is lined with acoustic material to prevent cabinet resonance. Front panel has at-

tractive picture frame molding and fine quality plastic grille cloth that matches the finish. Baffle area approximately 4.3 cubic feet. Cutout for 12" speaker. Dimensions: 20" wide, 23" high, 16" deep. Shpg. wt., 28 lbs.

## LAFAYETTE UNIVERSAL HI-FI SPEAKER ENCLOSURES

LAFAYETTE UNIVERSAL SPEAKER ENCLOSURES are "universal" in the sense that almost any combination of speakers can be installed in the cabinet. Has cutout for 15" speaker plus adapter for 12". Also a cutout for 84" or 8" speaker plus adapter for 5" and blank wood block if

such speakers are not desired. In addition, a tweeter opening is provided for most standard tweeters, plus adapter for Lafayette HK-3, HW-7 or Lafayette-Goodmans SK-104 tweeters plus blank wood block if no tweeter is used.

## UNIVERSAL BASS REFLEX ENCLOSURES

Solidly constructed of %" stock, Finished models of genuine veneers of the original wood. Universal speaker panel is detailed with picture frame molding and covered with pleasing plastic grille. 5" tapered offset legs are edge-tipped with brass ferrites. Lined internally with accountic material. Size of lowboy (less legs): 28%" w. 23%" h, 16%" d. Same

size for highboy with height and width interchanged. Shpg. wt., 54 lbs. CAB-13—Highboy; CAB-14—Lowboy. Unfinished ... Net 39.50 CAB-19—Highboy; CAB-20—Lowboy. In Mahogany or Blonde (please specify finish) ... Net 49.50 CAB-21-Highboy; CAB-22-Lowboy. In Walnut .. Net 52.50

## SPECIAL MONEY SAVING COMBINATIONS-LAFAYETTE CABINETS AND NATIONALLY FAMOUS SPEAKERS COMBINATIONS WITH LAFAYETTE UNIVERSAL CABINETS.

				Ta			_		10
			Reg.	Special Combin- ation				Reg.	Special Combin- ation
Stock No.	Speaker	Enclosure	Price	Price	Stock No.	Speaker	Enclosure	Price	Price
57-179 57-180 57-181* 57-182 57-183 57-184*	University 6303 University 6303 University 6303 University 6303 University 6303 University 6303	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	120.84 130.84 133.84 120.84 130.84 133.84	99.50 109.50 112.50 99.50 109.50 112.50	5 V · 21 S 5 V · 21 S 5 V · 21 G 5 V · 21 R 5 V · 21 S 5 V · 21 S 5 V · 22 O ·	Latayrite-Goodmans SR-110 Lafayrite-Goodmans SR-110 Lafayrite-Goodmans SR-110 Lafayrite-Goodmans SR-110 Lafayrite-Goodmans SR-110 Lafayrite-Goodmans SR-110	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	87.00 97.00 100.00 87.00 97.00 100.00	84.00 94.00 97.00 84.00 94.00
\$Y-185 \$Y-186 \$Y-187* \$Y-188 \$Y-189 \$Y-199*	University 312 University 312 University 312 University 312 University 312 University 312		108.10 118.10 121.10 108.10 118.10 121.10	90.95 100.95 103.95 90.95 100.95 100.95	5Y-221 5Y-222 5Y-223 5Y-224 5Y-225 5Y-226	Lafayette-Goodmans SR-111 Lafayette-Goodmans SR-111 Lafayette-Goodmans SR-111 Lafayette-Goodmans SR-111 Lafayette-Goodmans SR-111 Lafayette-Goodmans SR-111	CAB-13 CAB-19 CAB-21 CAB-21 CAB-20 CAB-22	94.00 104.00 107.00 94.00 104.00 107.00	91.00 101.00 104.00 91.00 101.00 104.00
57-191 57-192 57-193 57-194 57-195 57-196	Electro-voice 12YRX8 Electro-voice 12YRXB Electro-voice 12YRXB Electro-voice 12YRXB Electro-voice 12YRXB	CAB-19	104.18 114.18 117.18 104.18 114.18 114.18	84.75 94.75 97.75 84.75 94.75	\$Y-227 \$Y-228 \$Y-229 \$Y-230 \$Y-231 \$Y-232	Lafayette-Goodmans SK-112 Lafayette-Goodmans SK-112 Lafayette-Goodmans SK-112 Lafayette-Goodmans SK-112 Lafayette-Goodmans SK-112 Lafayette-Goodmans SK-112	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	109.00 119.00 122.00 109.00 119.00 122.00	103.00 113.00 116.00 103.00 113.00 116.00
\$Y-197 \$Y-198 \$Y-199* \$Y-200 \$Y-201 \$Y-202*	Electro-voice 1STRAB Electro-voice 1STRAB Electro-voice 1STRAB Electro-voice 1STRAB Electro-voice 1STRAB Electro-voice 1STRAB	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	116.92 126.92 129.92 116.92 126.92 129.92	93.50 103.50 106.50 93.50 103.50 106.50	\$Y-233 \$Y-234 \$Y-235 \$Y-236 \$Y-237 \$Y-238°	Lafayette-Goodmans SM-113 Lafayette-Goodmans SM-113 Lafayette-Goodmans SM-113 Lafayette-Goodmans SM-113 Lafayette-Goodmans SM-113	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	119.00 129.00 132.00 119.00 129.00 132.00	111.50 121.50 124.50 111.50 121.50 124.50
57-203 57-204 57-205 ° 57-206 57-207 57-208 °	Jensen M223F Jensen M223F Jensen M223F Jensen M223F Jensen M223F Jensen M223F	CAB-19	112.00 122.00 125.00 112.00 122.00 123.00	93.75 103.75 106.75 93.75 103.75 106.75	5Y-239 5Y-240 5Y-241 5Y-242 5Y-243 5Y-244	Lafayette-Goodmans SK-114 Lafayette-Goodmans SK-114 Lafayette-Goodmans SK-114 Lafayette-Goodmans SK-114 Lafayette-Goodmans SK-114 Lafayette-Goodmans SK-114	CAB-13 CAB-19 CAB-21 CAB-10 CAB-20 CAB-22	119.00 129.00 132.00 119.00 129.00 132.00	113.00 123.00 126.00 113.00 123.00 126.00
57-209 57-210 57-211* 57-212 57-213 57-214*	Jensen CX120	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	89.00 102.00 89.00 99.00 102.00	76.50 86.50 89.50 76.50 86.50 89.50	\$Y-245 \$Y-246 \$Y-247* \$Y-248 \$Y-249 \$Y-250*	Lafayette-Goodmans SK-115 Lafayette-Goodmans SK-115 Lafayette-Goodmans SK-115 Lafayette-Goodmans SK-115 Lafayette-Goodmans SK-115 Lafayette-Goodmans SK-115 Walnut or Wiennes (Infah.	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	129.00 139.00 142.00 129.00 139.00	121.50 131.50 134.50 121.50 131.50 134.50

## ETTE 3-WAY SYSTEM

MID-RANGE SPEAKER . HORN TWEETER . CROSSOVER NETWORK



42.50

This new multi-speaker asstem provides true high fidelity reproduction at the lowest price ever. Included in the 3-way system are a Jensen 15" woofer, Jensen 8" mid-range speaker. Jensen 15" woofer, Jensen 8" mid-range speaker. Jensen 15" woofer, Jensen 8" mid-range speaker. Jensen 15" supplied to the second procession driver horn tweeter and Lafayette LN-3 capacitance-inductance crossover network. Crossover is al 350 and 5900 cycles, and unit is supplied with two, built-in, cuntinuously variable "presence" and "brilliance" controls wired on 2-ft. extension cables. Outstanding bass and midrange response, plus brilliant reproduction of the highest audible frequencies result in superh performance from handling capacity in has reflex enclosure, 25 watts. Impedance 16 obtns. Spg. wt., 19 lbs.

5Y-98-Speaker System 5Y-98-5peaker system 5Y-97 Same as \$Y-98 but with 12" Jensen woofer 39.50

Completely assembled bass reflex cabinets constructed of 3," hardwood, ready for finishing. Dimensions of highboy, less legs: 29" H, 23\%" W, 16" D. Lowboy same size with H and W dimensions interchanged, Legs are 5" H, Shpg, et., 42 lbs.

CAB-13- PRESSEMBLES UNITHISHER WIGHOUT CANTELL	Net 39.50
CAB-14- PREASSEMBLED UNFINISHED SOMEOF CARINET	Net 39.50
CK-10 Unfinished Highboy Speaker Cahinet Kit	Net 29.50
CK-11 Use-ished tomber Seesher Cabinet Vit	Not 29.50

NOTE: FOR Combinations of Latayette Deluxe Universal Cabi-nets and Latayette-Goodmans 3-way speakers, see other pages.

	SONATOR ENCLOSURE		Reg.	ation
Stock No.	Speaker	Enclosure	Price	Price
57-2691 57-270	University UXC-122	CAB-16 CAB-17	61.84	53.75 55.75
54-2711 54-272	Electro-voice SP128 Electro-voice SP128	CAB-16 CAB-17	63.80	\$3.50 55.50
5V-2731	Lafayette SK-SB	CAB-16 CAB-17	59.00	55.00 57.00
\$Y-2751 \$Y-276	Electro-Voice 12TRX8	CAB-16 CAD-17	94.18	74.78
57-2771 57-278	Jensen CX 120 Jensen CX 120	CAB-16 CAB-17	79.00 81.00	66.50
57-2791 57-280	University 312 University 312	CAB-16 CAB-17	88.10	80.75



## **New! Lafayette** COMPRESSION-HORN TWEETER

. RESPONSE 1500-16,000 CPS . 20 WATTS . EXPONENTIAL HORN . FOR 7-WAY, 3-WAY OR 4-WAY SPEAKER SYSTEMS . WIDE-ANGLE DISPERSION OF HIGHS . FOR TOP OR IN-CABINET MOUNTING

quency response of 1500-16,000 cps and a continuous duty rating of 20 watts. Vertical positioning of the mouth of the exponential harn provides widest dispersion of high frequencies at ear-height. With chrame-plated fark-type swivel base. Flux density is a high 13,500 gouss for greatest efficiency; crassaver range is 2800 cps or higher, with 4000-5000 cps recommended for 3-way systems; the wide, smooth response range permits it to be used with 2-, 3-, or 4-way speaker systems. The exponential harn is a heavy, one-piece costing non-resonant within the audible frequency range. Voice cail Impedance is 8-16 ahms. Chrome-plated screw terminals for easy connections. Overall height with swivel stand is 4%"; width 2%", behind-ponel mounting requires a rectangular cutout (long axis vertical)  $134^{\prime\prime}$  x 4-3/16 $^{\prime\prime}$ , Shpg. wt., 3 lbs. SK-105 Compression-driver Horn Tweeter ...... Net 8.95

## ACOUSTIC RESEARCH AR-1 & AR-2 SPEAKER SYSTEMS

Based on new "acoustic suspension" principle. Affords lowest bass harmonic distorciple. Attords lowest bass harmonic distor-tion and extended low freq. response, AR-1 includes a 12" low-freq, mechanism and an 8" mid-range and high-freq, unlet. Uniform response to 15,000 cps. AR-2 includes a 10" speaker and a tweeter in a cobinet slightly smaller than AR-1. Shpg. wt., AR-1: 60 lbs; AR-2: 45 lbs.

ACOUSTIC RESEARCH	AR-1	(Mahagany or birch)	Net 185.00
ACOUSTIC RESEARCH	AR-1	(Walnut)	Net 194.00
ACOUSTIC RESEARCH	AR-1	(Korino)	Net 200.00
ACOUSTIC RESEARCH	AR-2	(Mahagany or birch)	Net 96.00
ACOUSTIC RESEARCH	AR-2	(Wolnut)	Net 102.00
ACOUSTIC RESEARCH	AR-Z	(Korina)	Net 111.00

## 2 OR 3 WAY CROSSOVER NETWORK



- 4 CROSSOVER FREQUENCIES
- . L PAD BALANCE CONTROLS
- . EASY TO USE
- . IMPEDANCE 16-OHMS

at an unbeatable price. It can be used in a twa-way system by crassing over c 500 cps or 3300 cps, and in a three-way system by utilizing the two simultaneously The change fram a 2-way to a 3-way 6 db per active network may be accomplished easily. Complete with two level balance controls, Size: 5% x 2% x 2%". Shpg. wt., 2% lbs.



Heavier Construction— Fully-Cured 4° White Birch Smootnly Sended Ready for a Fine Finish Picture Frame Moulding Built-In Pre-Cut for Most Tweeter, If Desired [weeter adapter Pre-feb % Baffle for any Lafeyette Ang Almost Any Other Speaker or 8½°, 8° or 5° Mig-range. If Desired Pre-Cut for 18" Adapter for 12' Perts Fit Air-tight Carefully Designed Bass Reflex Port

OP

LAFAYETTE-GOODMANS

Net 49.50

3-way SPEAKER SYSTEM

ONLY 49.50

SK-101

EXPLODED VIEW SHOWS IN CABINET

## LAFAYETTE UNIVERSAL HI-FI BASS REFLEX ENCLOSURE KITS

BASS REFLEX ENCLOSURE KITS

• EASIEST TO ASSEMBLE — ALL YOU NEED IS A

SCREWORIVER! • ¼" WHITE BIRCH • PRECISIONCUT — FITS TOGETHER SMOOTHLY • PERFECT FOR
SINGLE WIDE RANGE, 2-WAY OR 3-WAY SPEAKER
SYSTEMS • HIGHBOY OR LOWBDY STYLE

All pieces of these carefully designed bass reflex high
fidelity speaker enclosures are accurately precut of ½"
veneers to fit snugly together and eliminate spurious
resonances. Front panels are handsomely detailed with
picture-frame moulding and covered with pleasingly
decorative plastic acoustic grilles to hlend with any finish
and room decor. Attractively tapered offset legs are protected by good-looking brass ferrules. Acoustic lining maprovided for 15" speaker plus adapter for 12"; 84" or 8" midrange plus adapter
for 5" and blank wood block if no midrange speaker is used: Jensen compression horn tweeter plus adapter for Lafayette HK-3, HW-7 or LafayetteGoodmans SK-104 tweeters plus blank wood block if no tweeter is used. Thus,
any single wide-range 12" or 15" speaker may be used, or any Lafayette 2- or
3-way speaker system, or almost any other combination of speakers. Kits are
supplied unfinished, smoothly sanded and ready for finishing. The lowboy-style
cabinet dimensions are (less legs) 28%" w x 23\%" h x 16\%" d; less are 7"
Instructions, all parts, hardware, and grille are included with each kit. Shpg.
wt., 54 lbs.

CK-10 Unfinished Highboy Enclosure Kit.

Net 29.50

CK-10 Unfinished Highboy Enclosure Kit CK-11 Unfinished Lowboy Enclosure Kit

To obtain professional-like furniture finishes. Include stain, filler, sealer, shellac, varnishes, finishing paper, brushes, and detailed instructions. Shpx. wt., 6 lbs.

FK-10 Wainut ... FK-20 Mahogany ... FK-30 Fruitwood ...
FK-40 Cherry ... FK-50 Golden Oak ... FK-60 Ebony ...

Factory-Assembled Bass Reflex Enclosures

Same as the Lafayette kits above but factory-assembled and finished in lustrous, hand-rubbed mahogany or blonde to measure up to the finest standards of high quality fine-furniture finishes. Also available assembled but unfinished. Shpg. wt., 54 lbs.

CAB-13 Assembled. (Infinished Highboy Net 39.50 CAB-19 Highboy, Assembled, finished in Mahogany or Blonde (please specify) Net 49.50 CAB-21 Highboy Assembled. In Walnut Finish. Net 52.50 CAB-14 Assembled, Unfinished Lowboy

CAB-20 Mahogany or Blonde Lowboy, completely assembled (please specify choice of finish) CAB-22 Lowboy Assembled, in Walnut Finish Net 52.50 FREQUENCY RESPONSE FROM 2000 CPS TO BEYOND AUDIBILITY LOUVERED ACOUSTIC LENS FOR UNIFORM SOUND DISPERSION HANDLES 25 WATTS OF POWER PRICED EXCEPTIONALLY LOW

HIGH FREQUENCY TWEETER

DIRECT IMPORTATION
MAKES THIS PRICE POSSIBLE!

WITH ACOUSTIC LENS

New high frequency tweeter featuring a louvered acoustic lens for uniform sound dispersion and copoble of handling up to 25 watts of distortion-free power. The directional lendency of high frequency notes is overcome by the natural wide dispersion angle of the short harn and the acoustic lens which disperses and radiates the high notes smoothly throughout the entire listening area. The lens is detachable for panel mounting, with a separate base for the tweeter furnished for external mounting where desired, Aluminum voice cail has 16 ohms impedance. Size: 4½ long x 3" diameter, lens extends 2½". Requires a crossover network, preferably one with a level control, such as the LN-2. With full instructions, Shpg. wt., 5 lbs.

## **FAMOUS LAFAYETTE HK-3**



METAL-CASED **CONE TYPE** HI-FI TWEETER

**OUTPERFORMS TWEETERS** COSTING MANY TIMES THE PRICE

FREQUENCY RESPONSE 2000 -16,000 CPS HANOLES 20 WATTS OF POWER

lighest quality cone type high frequency tweeter having range from 2000 to 16,000 cycles. Especially efficient a range from 2000 to 16,000 cycles, Eapeclally efficient at higher end of audio apectrum where other cone type tweeters tend to lone clarity and volume. Entirely closed in a metal case with a base so that it can stand by itself or br mousted on a flat surface with mounting bracket supplied. Rated to handle 20 watts of power. A crossover network is required; the Lafayette LN-2 is ideal. Voice coil impedance 8-16 ohms. Size: 3½8″ x 2½6″ x 3″ Diam. Shpg. wt., 31b.

## **NEW! METAL CASED TWEETER** SPECIAL PRICE



• FREQUENCY RESPONSE 3,000-16,000 CPS HANDLES 20 WATTS OF POWER

CHOICE OF 8 OR 16 OHM IMPEDANCE The modest price of this tweeter gives no indication as to its high quality. Smooth, silky reproduction of the high frequencies along with an even sound dispersion is in-sured by the use of the round cone. The tweeter assembly 

## LAFAYETTE 2-WAY CROSSOVER NETWORK




ADJUSTS TO EITHER 2500 OR 5000 CPS CROSSOVER FREQUENCY

8.75

A carefully designed capacitive-inductive 2-way crossover network with crossover frequency easily set to either 2500 or 5000 cycles. Has a built-In continuously variable high-frequency "Brilliance" level control to match room acoustics perfectly. Control has a 2% fs. cable to maunt on rear or side fractive brushed-gald finish escutcheon plate. For use with 8-16 hm speakers. Easily accessible screw terminals. Metal case 5%" x 2%" H x 2%" D. Complete with simplified instructions. Shap. 11., 5 lbs.

LN-28 2-Way Crossover Network With Control ...

## NEW! 2- and 3-way L/C CROSSOVER NETWORK



• 2- OR 3-WAY
• CHOICE OF 4
CROSSOVER
FREQUENCIES

. A CROSSOVER COMBINATIONS METAL CABINET

BRILLIANCE AND PRESENCE

This versatile unit can be used either as a 2-way or 3-way 6 db. per actave network, simply by loasening a few screws on the rear terminal panel and shifting several wites. You can use this network for a 2-way system now, easily and quickly convert to 3-way later. Six crossover with 2000-3000 cycle or 5000 cycle crossover, and 3-way with crossover frequencies of 350 and 5000, 350 and 2000-3000, 700 and 2000-3000 or 700 and 5000 cycles—a total of four different crossover frequencies! Suitable for 8-16 ahm speakers. The network is housed in an attractive metal case, suitable for mounting inside enclosure or leaving aut in the apen. Two level controls—Brilliance and Presence controls—are mounted on the frant panel. If desired, these level cantrals may be removed, along with the beautiful gleaming capper excutchean plote, for external mounting; controls are wired with 3-fool long leads. High quality components are used for long life and tap performance.

IN-5 Lafavette L/C Crossover

Net 14-95

performance.
LN-5 Lafayette L/C Crossover

LAFAYETTE-GOODMANS High Fidelity Speakers FROM ONE OF ENGLAND'S LEADING SPEAKER MFR'S! Made to Lafayette's own rigid specifications

LAFAYETTE-GOODMANS 15" WOOFER

An all new 15" low-frequency speaker featuring smooth, powerful reproduction down into the sub-audible frequencies. Its rigid construction and high efficiency design permit the reproduction of even the loudest low frequency transients without ringing or distortion. Response 25 to 7000 cps. Alcomax magnet with flux density of 13,000 lines and total flux of 89,500 maxwells assures the utmost linearity at full power 30 watts of program material, Voice coil diameter 14" [Impedance 16 ohms. Spig. wt., 15 lbs. 3-WGY SPEAKER SYSTEM

• MANCES 30 WARTS • FAMOUS ENGLISH GOOD.

MANS-MADE 12 WOOFER, BY, MIDRANGE, COMPRESSION-ORIVER HORN TWEETER • LAFAYETTE L/C

17 WOOFER CROSSOVER NETWORK • SYSTEM RESPONSE 30

16.000 cps

Here is an outstanding 3-way high fidelity speaker system which we are indeed proud to be able to offer. It includes a group of speakers custom-made for Lafayette by Goodmans, famous English manufacturer of some of the world's best high fidelity speakers. The system is ideal for installation in Lafayette bass reflex speaker enclosures, and provides the extremely wide range of 30 to 16,000 cps (8 db down at 20,000 cps) smoothly and without unpleaxant peaks. Power handling capacity of the system is 30 watts of integrated program material. Included in the system are the Lafayette-Goodmans SK-104 compression - driver tweeter operating at from 5,000 cps, to over 16,000 cps. Also included is the Lafayette LN-5/hinductance-capacitance (L/C) crossover network with attached Brilliance (high-frequency) and Presence (midrange) controls. System impedance is 16 ohms. This is a really great system at an unusually low price! Shpg. wt., 25 lbs.

SY-163 Lofoyette-Goodmans
3-Way Speaker Switzem.

SK-101-15" Lafayette-Goodmans Woofer Net 28.50

LAFAYETTE-GOODMANS 12" WOOFER

A highly-efficient low-frequency transducer for faithful reproduction of the lowest audible frequencies without tone coloration or distortion, incorporates high flux Alcomax magnets for smooth response and good power sensitivity. Frequency response is 30-7,000 cps, with recommended crossover at 700 to 1000 cps. Total flux is 85,500 maxwells; voice coil diameter is 14x°. Rated at 30 watts power handling capacity for integrated program material in a multiple speaker system with an LC crossover network. Voice coil impedance 16 ohms. Size 124x° diam. x 6° deep. Spig. wt. 9 lbs.

SK-102 12" Lafayette-Goodmans Woofer Net 23.50

LAFAYETTE- 81/2" MIDRANGE SPEAKER

A sweet-sounding high-fidelity eproducer capable of doing full justice to the most important range of musical reproduction—the mid-frequency range from 500 to 5,000 cps. Incorporation an "accordion Alcomax magnets, a specially-constructed come will am "accordion Alcomax magnets, a specially-constructed come will am "accordion Alcomax magnets, a specially-constructed come will am "accordion bloom to be supported by the special special

SK-103 81/2" Lafayette-Goodmans Midrange Net 5.95

LAFAYETTE-GOODMANS high frequency DRIVER and HORN

A highly efficient compression-type wide-angle radiator for the higher audio frequencies. With high flux Alcomax magnets. Rigid plastic horn with circular mouth and special design acoustic chamber with phasing plug achieves smooth wide-angle distribution to extremely high frequencies. Horn diameter 2½" mouth opening 1½" diam. Pot diameter 2½". Overall depth 3" Frequency response 2500 to Pot 6,000 cps. 8 db down at 20,000 cps. Magnet flux is 25,400 maswells. Voice coil diameter is 1" Recommended crossover is 5,000 cps. Power rating is 30 waits program material in a 3-way system. Voice coil is 16 ohms. Shpg. wt., 3 lbs.

SY-177 Lafoyette-Goodmans 3-Way 15" Speaker Net S4.50 SK-104 Lafayette-Goodmans Tweeter

Net 10.95

Famous 3-WAY SYSTEM


57-163 Lafayette-Goodmans

3-Way Speaker System

LAFAYETTE-GOODMANS 15" 3-WAY SYSTEM

An outstanding 3-way speaker system similar to SY-163 system above, but featuring the new 5K-101 15" Lefayette-Goodmans woofer for extra high efficiency even at subaudible frequencies. System response 25 to 16,000 cps. Camplete with LN-5 crossover network and 5K-103 BY" indrange speaker and 5K-104 tweeter. A superb speaker system with wide, smooth response and a new low in distortion and tone coloration.

with 15" WOOFER...8" MID-RANGE SPEAKER... HORN TWEETER... **CROSSOVER NETWORK** 



. 8-INCH MID-RANGE SPEAKER (SK-74)

ONLY 5.50 DOWN \$5.00 MONTHLY 15-INCH WOOFER WITH 31.5 OZ. MAGNET (SK-67) . NEW HIGH-FREQUENCY ACOUSTICAL LENS TWEETER (HW-7)

. 3-WAY CROSSOVER NETWORK (LN-3)

Lafayette presents this outstanding 3-way speaker system designed for the high fidelity enthusiast who desires performance formerly possible in multi-speaker systems costing many times this price. You won't believe your ears when you hear the superb reproduction throughout the entire audio spectrum. The SK-67 15" woofer provides phenomenal bass response, the SK-74 8" speaker delivers full bodied, mid-range frequencies, and the HW-7 high frequency acoustical lens tweeter faithfully reproduces the highest audible frequencies. Crossover points at 350 and 5000 cycles are provided by the LN-5 3-way inductance capacitance network with continuously variable presence and brilliance controls that adjust tone balance to personal taste. Spag. wt. 25 lbs.

SY-93-Complete System as listed above

SPEAKERS AND SPEAKER SYSTEMS AME AVAILABLE ON LAFAYETTE'S EASY PAY PLAN - SEE PA

## LALFAYETPIPE

## UDIO & PHONO

## LAFAYETTE SPECIAL VALUES IN T PADS, FADERS AND SPEAKER SWITCHES.



Multiple Speaker Switch (A). Constant impedance device for controlling any 6 remote speakers; up to 63 different combinations. Wall mounting with brass plate. Shpg. wt., 10 oz. MS-459 With Instructions and hardware Net 2.10 Net 2.10

Multiple Speaker Switch (H), Identical to above but mounted on flat, gold-embassed plate for mounting on flat panel. 3½" x 2%". Shpg. wt., 10 oz.

MS-544

Net 1.19

Speaker Selector Switch (B). Selects 3 speakers in any combination, with up to 60 watts of audio power. A constant impedance device. On gold finished steel electric outlet plate., 2% x 4½".

MS-458 Shpg. wt., 1 lb. .....

Remote Speaker Switch (C). Connects remote speaker to any existing set. Turns both on or either speaker on or off. With gold embossed plate for front panel mounting. Shpg. wt., 6 oz. MS-469 With all parts and instructions. Net .95

MS-470
Remote Speaker Fader (E). Provides adjustable volume level for Radio, TV, HI-Fi and remote speaker. Gradually increases volume on one speaker while diminishing volume on the other. May also be used to adjust volume for 1 speaker. Gold plate for front panel mounting. With Instructions. Shpg. wt., 6 oz.

Net 1.10 VC-53

T Pads (D). Constant impedance control to adjust speaker volume. With brass satin plate for wall mounting. With all parts and instructions. Shpg. wt., 10 oz.

VC-51 B ohm T Pad Net 3.85

Net 3.85 VC-52 16 ohm T Pad

NEW LAFAYETTE L PADS

SPECIAL !

PK-168

1.25

2.50

2.95

RONETTE TO-284-0V--TO-222

RCA "45"

0 0 0 0



New L pads for use as "brilliance" controls to vary tweeter level, or as "presence" controls to vary mid-range speaker level. Both wirewound elements are concentrically mounted within one plastic housing. With gold-finished metal escutcheon plate, mtg screws, and attractive black knob. Size: 1-9/16" dla., %" deep (less shaft), 2½" deep overall. Shpg. wt., 6 oz. VC-49-L pad for 8 ohm circuits

VC-50-L pad for 16 ohm circuits

Net 1.49 Net 1.49

Net

## LAFAYETTE COMPLETE CABLE ASSEMBLIES FOR HI-FI AND P. A. High quality extension cables "tailor made" for users of recorders, hi-fi equipment, etc. All plugs molded directly to various cable combinations. Shielded cable for high impedance (mike, etc.) connections; parallel wire for low impedance (speaker, etc.) connections. Average shpg. wt., 8 oz.

90° PHONE PLUG (A) TO VARIOUS CONNECTIONS. Std. 14" sleeve: completely shielded. All cables shielded except ° unshielded parallel

RCA TYPE PHONO PLUG (B) TO VARIOUS CONNECTIONS. All cables shielded except \* unshielded parallel cable.

Stock No.	One Termination	Cable Length	Other Termination	Net
MS-545 MS-546 MS-547 MS-548 MS-549 MS-550 MS-551* MS-552*	90° phone plug (A) 90° phone plug (A)	72 in. 72 in. 72 in. 72 in. 72 in. 120 in. 72 in. 72 in. 72 in. 72 in.	Stroight RCA phono plug (B) Straight RCA phono jack (D) Straight barrel phone jack (C) Mike connector (F) 90° RCA phono plug (E) Stripped and tinned ends (J) Alligotor clips (I)	.72 .85 .93 .93 1.26 .72 .51

Stock	No.	One Terminat	ion C	ableLen	gth Other	Termination
MS- MS- MS- MS- MS- MS- MS- MS-	480 Stra 481 Stra 487 Stra 483 Stra 484 Stra 555 Stra	right RCA phono night RCA phono	plug (8) plug (8) plug (8) plug (8) plug (8) plug (8)	36 in 60 in 72 in 48 in 60 in 72 in 72 in 120 in	Stroight R  Straight p  RCA-type RCA-type Borrel-typ Mike conr	

PHONE PLUG (G) TO VARIOUS CONNECTIONS. Std. 4" diam. sleeve;

Stock No. One Termination	Cable Length	Other Termination	Net
M5-482 Straight phone plug (G) M5-485 Straight phone plug (G) M5-553 Straight phone plug (G) M5-554 Straight phone plug (G)		RCA-type phono jack (P) Borrel-type phone jack (C) Mike connector (F) Mike connector (F)	.79 ,79 .93 1.26

90° RCA PHONO PLUG (E) TO VARIOUS CONNECTIONS. All cables shielded

Stock No.	One Termination	Cable Length	Other Termination	Net
MS-558	90 RCA phono plug (E)	72 in	Borrel-type phone jock (C)	.72
	90 RCA phono plug (E)	72 in.	Mike connector (F)	.88
	90 RCA phono plug (E)	36 in.	Stripped and tinned ends (J)	.32
	90 RCA phono plug (E)	72 in.	Alligator clips (I)	.63

STOCK NO.

PK 80

eided parallel cable, 10 ft. long,

with alligator clips (1) at both ends. MS-561

REPLACEMENT CARTRIDGES

**FOR RCA 74067** Replacement for cartridges in many thousands

of RCA45 and many LP record changers.

1 MIL SAPPHIRE STYLUS 2.3V OUTPUT

HIGH IMPEDANCE CRYSTAL TAKES 7-10 GMS PRESSURE . " MTG CENTERS

PK-168 . Net 1.25 PS-555-Saaphire replacement stylus for PK-168

.Net .99 GOLDRING "500" MAGNETIC

GOLDRING "500" MAGNETIC TURNOVER CARTRIDGE
Entirely unique, and exclusive among the 500's features is the "push-pull" coil arrangement which automatically cancels out inductive hum picked up from the radiation of changer maters, etc. This permits users of the "500" to realize the full potential of the variable refuctance principle. The "500" will fit any tone arm having standard y<sub>3</sub>" mounting holes to replace any certridge without attendant of playing equipment.

PK-137-GOLDRING "500" cartridge with Net 5.75 REPLACEMENT

SONOTONE 2T-S (Supersedes 9980-5) Turnover Ceramic Cartridge

This cortridge is used to replace Astolic AC, ACD, CAC, GC, LQD, ELECTRO-VOICE 16TT, 33, 43, 46T 96T; SHURE WC series from WC22 to WC36, W22, W26; WEBSTER ELECTRIC AX, A1, A9-1. It is to be used on VM, Galumbia 360, Webster, Crescent record changers and many other types now in use. Will give such hi-fi characteristics extended frequency range and obsence of distortion far beyond most cartridges it replaces — all with the added advantages of ceramic sofety from humidity and heat. Mas I mil stylus for LP records and 3 mil for standard — both sapphire. PK-40-In lots of 5, ea. 3.50.... ...Singly, ea. 3.75

HI-FI TURNOVER CARTRIDGE

● 40-14,000 CYCLES (PK-79)

Never before has a turnover catridge of this quality been offered at such a price. Frequency response from 40-14,000 cycles ± 2 dbl Mas 2 sapphire styll to play all speeds and types of records. Needle pressure required is only 5 grams on LP and 12-15 grams on 78 RPM. Output is 5 valts. Cames complete with Lutrover mechanism and valts. Comes complete with turnover mechanism and knob. Fits Webster, Gerrard, VM, Callara and tone arms of other leading manufacturers of record changers and players. This is one of the autstanding Lafayette values. PK-79-Singly, each \$2.75.....in lots of 3, each 2.50 

## PHONO CARTRIDGES 3.5 VOLT OUTPUT (PK 11)

Guaranteed high quality exact duplicates for direct re-placement of all standard cartridges such as L70, L82, L92, W608, N10, and many others. Pin plug connectors for all 78 r.p.m

3 VOLT TURNOVER CARTRIDGES

High Output: 3 volts

Turnover Mechanism

Dual Sopphire Styli

Net .60

● Excellent Frequency Response 

PK-87-Sopphire STD (78) Replacement Needle.

## RONETTE HI-FI CARTRIDGES IMPORTED FROM HOLLAND

Lafayette brings you this famous high fidelity cartridge for use in Collars, Webster, Garrard and VM changers. Turnaver type equipped with 2 sapphire styli to play all speeds. Frequency response to 9,000 cycles, autput .7 volt. Complete with turnaver mechanism and knab; will fit most tane arms of record changers and players. PK-62 (TO-284-OV)

.eo. 2.95

HIGH OUTPUT MODEL

tos less than 1% intermodulation distartion plus high output of 2.2 Valts. Complete turnover with 2 sapphire tyli. Popular type mounting.

PK-82 (TO-222)-In lats of 3, each 2.75; singly 2.95

TX-88 HI-FI MODEL

TIX-88 MI-FI MODEL

This new wide range high fidelity trystal turnaver cartridge has a frequency response flot from 30:24,000 cps.

Output is 0.4 voits, which makes it useable without a
preamp. It gives straight line response from new artho
records and so requires no equalization. Extremely high
compliance stylus assembly just snaps into place. Camplate with dual styli. Shpg. wt., 6 oz.

POMETTE TX-RE

GOLDRING "500" SONOTONE 2T-S 7.35 3.75 5.75




EXCELLENT FREQUENCY RESPONSE

HIGH OUTPUT LOW TRACKING FORCE
 DUAL SAPPHIRE STYLI

Anormer instance or Lafayette special value for you; a stereo crystal turnover cartridge at such a low price. Frequency response 40-14,000 cps. Tracks with low stylus pressure and high output voltage. Excellent channel separations for stereo effect. Supplied with turnover mechanism, knob and dual sapphire styli to play records of all speeds. Completely compatible. Fits all standard arms. Shpg. wt., 6 oz.

REPLACEMENT STYLI PK-281—Sopphire Stereo LP PK-282—Sapphire STD (78) PS-86—DIAMOND Stereo LP Net .69 Net .69 Net 3.49

## **NEW! 4-SPEED HI-FI** TURNOVER PICKUP



ARM TAKES STEREO OR MONAURAL CAR-TRIDGES WITH WIDE RANGE MONAURAL
CARTRIDGE ADJUSTABLE ARM HEIGHT AND STYLUS PRESSURE

Arm is wired for stereo, anticipating future conversion. Has a wide range turnover manaural crystal cortridge with dual sapphire styli. Output is 1½ V. Easy height adjustment at base, 1½ % to 3-9/16". Also stylus pressure adjustment. Plastic arm 9½" lang overall, Base 1½" w. with mounting holes on 1½" centers. Shielded leads. Sotin smooth light maroon finish. Shpg. wt., 2 bs.

#mooth III	gar moroon tialin. Sapp. wt., 2 fbs.		
PK-146		Net	2.75
PK-232	Pickup arm only less cartridge	Net	1.25
PK-158	Sapphire LP replacement Needle	Net	.69
PK-150	Sonohire STD replacement Needle	Net	.69

LAFAYETTE



MONAURAL LP, 78's


Here is a combination of a famous make crystal stereo cartridge and stereo wired arm all ready for use—at an amazingly lowprize for a new stereo item. Completely compatible, this unit will play either stereo ar manaural records (78's, too). Output is .4 valt per channel, response 30-14,000 cps. Min. Stylus pressure 6.8 grams. Styli are dual sapphire type, .7 mil and 2.5 mil, individually replaceable.

PK-290 Stereo Tone arm with Turnover Stereo Cartridge....Net 6.95

## RONETTE MODEL-OV

## CRYSTAL TURNOVER STEREO CARTRIDGE

Another fobulous item for music lovers from Lofayette. We now bring you this autstanding cortridge so that you can enjay the breathtaking realism of the lotest sterea discs. Completely compatible, this cartridge plays either sterea or manaural records. Consists of 2 crystals to provide a. 4 valt autput per channel. Wide frequency responsed 30 to 14000 cps. Vertical and lateral compliance of 3.5 x 10 8 cm/dyne. Crosstalk, -24db. Supplied with furnaver dual sapphire styli for microgroove records and 78 rpm records. Fits all standard tone arms. Shap, wt., 8 or. IREG. 12 -95 78 rpm records. Fits o 8 oz. IREG. 12.95 SPECIALI NET 4.45



## 4 SPEED PHONO MOTOR WITH TURNTABLE

Quiet, dependable A-C operation assured by rubber shack-mounted friction drive mator. Speed change control through idler driving on 8" turntable. Maunting centers 4½ x 3½; 2½" depth below base plate. Shpg. wt., 3½ lbs.

ML-24 Phono and turntable PK-149 Mounting board for mater Net 5.50 Net 95c



## WIRELESS BROADCASTER

Play your phonograph through any radio any where in the house through your radio by microphone.



lafayette's new wireless broadcaster will extend your enjoyment of your phono-player to every room that has a radio. Connect phono to wireless broadcaster, tune in any radio to the wireless broadcaster, which broadcasts on an adjustable frequency between 700KC - 1700KC. Pick your spat. Will take crystal or magnetic cartridges and olso microphones for voice broadcast. Has valueme control with "an-off" switch. Size 4% s 5½ x 1½, "Completely wired and assembled with all tubes and operating instructions. 110V AC/DC aperation. Shaps. wt., 4 lbs.

LA-14 Wireless broadcaster PA-24 Crystol microphone

Net 4.25

Page 17

## BOGEN 33 WATT P. A. SYSTEM

104.50

This compoct 33 watt P.A. System complete with sturdy portable carrying cose housing 2 high quality 12" speakers each with 35 ft. cable, microphone, floor stand and desk stand is ideal for use by schools, churches, warehouse, nightclubs—indeed any high quality P.A. application, 117 V, 60 cps. AC. Shop, wt., 58 lbs. System consists at:

1—Bogen CHA 33 Amplifier.

1—Lafoyette PA-24 crystal microphone with 5' shielded cable.

1—Lafox MS-10C microphone flaor stand.

1—Atlas MS-10C microphone flaor stand.

2—Heavy duty 12" PA speakers.

1—Lofayette PA-31 pariable PA case.

2—35' lengths speaker cable.

PA-180 BOGEN CHA-33 P.A. SYSTEM AS DESCRIBED.

ATLAS MS-10C FLOOR STAND

## SPECIAL 12" & 8" P. A. SPEAKERS

• 12" FULL 15 WATTS OF POWER • 8" |FULL |10 | WATTS OF POWER . HEAVY ALNICO 5 MAGNETS

12" MODEL — fine quality throughout, these speakers were designed especially for public address work. Will handle 15 watts of power-making them ideal for use singly/for medium power systems or in multiples for higher power. Rugged mechanical construction, dust-proafed and rust-resistant. Have 4,64 oz. Alnico 5 magnet, 8 ohm voice coil. Shpg. wt., 5 lbs.

Net 4.95

SK-118
Not 4.95
8" MODEL — Ideal for larger scale, lower power paging systems. Same quality as 12" speaker above, but 8" diameter, rated at 10 watts, with 3.16 az. Alnica 5 magnet. 8 ohm veice coil. Shop. wt., 3 lbs.
SK-119

Net 3,95



8" MODEL - 3.95 12" MODEL - 4.95

## **NEW! POWER MEGAPHONE** Portable Sound Broadcaster

IDEAL FOR OUTDOOR HAMFESTS

Uses 8 Flashlight Cells • Completely Self-Contained • Weighs only 61/2 lbs. with Batteries • High Efficiency Horn Projects Sound 1000 Ft. • Shoulder Strap for Portability and Ease of Use • Microphone Detachable On 10-Foot Cord • For Construction, Auctions, Carnivals, Fire & Police Use • Also Ideal for Marine, Railroad, Civil Defense, Sporting Events

A power megaphane with many unusual features and many applications. Busically a highly efficient sound projector harn with a bullt-in microphane, copable of amplifying and projecting the vaice with a range of 1000 feet. The microphane is a telephane-type element, easily replaceable, and may be detached and extended up to 10 feet from the harn. The reflex-type harn is extremely light-weight, rubber-rimmed, of strong, sturdy spun aluminum construction with 2½° air calumn and is supplied with a strap far carrying ar placing an the shaulder. A press-to-talk switch an the microphane provides for economy of power use—power is used only when actually talking. No warm-up time required—amplification is instantaneous. A patented non-linear current limiting device restricts current flow to safe levels for langest battery life. Uses 8 size "O" flashlight cells in series with an approximate life of about 10 hrs. of use. Battery housing serves as base for entire assembly. Battery compartment opens easily by means of 2 thumbscrews far battery replacement. Size 17" long averall; harn mouth is 12" diam. Shpp. wt., 8 lbs. less batteries.

PA-13 - Power Megaphane, Less batteries.... Nel 29.50

BATTERIES FOR ABOVE—Burgess No. 2 or RCA VS036-8 Required

PA-24






DETACHABLE MIKE



REFLEX TRUMPET DUAL WIDE ANGLE 18.75



PAGING SPEAKER 90° DISPERSION


The high power handling capacity combined with maximum intelligibility make this a superior unit for paging and talk-back applications. Frequency Response 250-15,000 cps. Power capacity 30 watts. Impedance 8-ohms,90° Dispersion. Equipped with a universal mounting bracket, weather proofed, trapicalized with hermetically scaled driver unit, 9½ diam. x 8-13/16″ deep the speaker leads itself to we in an 8-4 distribution. lends itself to use in any P.A. situation.
PA-S5 90° DISPERSION PAGING SPEAKER.

149.95

## **BOGEN 20 WATT** MOBILE P. A. SYSTEM

.13

Completely portable in every respect, the versatility of this system allows Its use from any car ar truck, making the system ideal far sound truck application. System consists af:




amplifier with 3 speed phono top.

2—Electrovoice 844 speakers, with built in 30 watt driver units.

1-Lafayette PA-24 crystal microphone with

5' shielded cable. 1—Lafayette PA-34 microphone desk stand.

2-35' lengths speaker cable. Shpg. wt., of complete system 75 lbs.



25 WATT DRIVER **EXCELLENT** FOR

## ABOVE TRUMPET

DUAL-SPEAKER 30-WATT PORTABLE SYSTEMS

MODERN **SPEAKER** BAFFLES

FLOOR STAND



The most popular system for schools, RR waiting rooms, gyms, churches, noisy factories, Ideal for rentals.

Well built plywood speaker baffles for indoor public address and paging systems, intercoms extension speakers, etc. Frieze-design grille clath, modern walnut finish.

		SINGLY	LOTS OF 3
NO.	DESCRIPTION	EACH	EACH
58-10	For 5" or 6"	2.40	2.25
58-11	For 8"	2.75	2.55
58-13	For 10" or 12"	4.40	4.20

ALL LAFAYETTE AMPLIFIERS ARE GUARANTEED FOR ONE FULL YEAR

## LAFAYETTE MODEL PA-60 10-WATT P.A. AMPLIFIER



CHA 620Y

PA-60 24.95

ONLY 5. 00 Down

FEATURES: Provides extensive caverage—up to 20,000 square feet when used with trumpet speakers. For stare demonstrations, clubs, churches, affices, clossrooms, ouction sales, entertainment, Incorporates latest circuit features for improved performance. Separate valume controls permit mixing microphane and phono. 2 speaker output sockets. Cabinet is finished in baked hammerloid enamet.

hammerloid ename!

SPECIFICATIONS: TUBES: 12AX7, 6L6GB; 6X5GT
(Rectifier). PEAK POWER: 12 Watts. INPUT GAIN:
Microphone 105 db 2.2 Meg., Phone 65 db 1/4 Meg.
FREQUENCY RESPONSE: 70 to 10,000 cps ± 2 db.
TONE CONTROL ATTENUATION: Treble 15 db ot 10,000 cps. CONTROLS: 4; mile Power Phone or Radio, Tone. INPUTS: 2; 1-Microphone and 1-Phone.
OUTPUT IMPEDANCES: 4, 8, 16 ohms and 70 voits (500 ohms). HUM AND NOISE: 80 db below maximum output. POWER CONSUMPTION: 70 Watts.
110/120 V.A.C. 60 cps. SIZE: 10/3; w x 5/3; d x 6" h. SHIPPING WEIGHT: 12/3; lbs.

LAFAYETTE MODEL PA-62 30-WATT P.A. AMPLIFIER



PA-62 49.50

ONLY 5.00 DOWN - 5.00 MONTHLY

FEATURES: Ideal for use in churches, schools, small theoters, lecture harls and industrial plants. Priced extremely low to give extra profits to rentals and sales. Separate bass and treble tone controls, permits adjustments to meet all acoustic requirements. Two mike inputs, aptional 4-speed phono top. 70 valt constant voltage output top. Provides coverage up to 100,000 square feel when used with trumpet type speekers. Chassis is equipped with 2-speaker plug-in output sockets. Unit is housed in sturdy steel, well-ventilated tabinet. Madern streamlined styling. Finished in baked hammerlaid enamel. Removable escutcheon plate for rack and panel mounting.

SPECIFICATIONS: TUBES: 3-12AX7, 2-6L6GB; 573GT (Rectifier). POWER OUTPUT: 30 valts. IN-PUT GAIN: Microphone 125 db 3.3 Meg., Phono 82 db 1/2 Meg. FREQUENCY RESPONSE: 30 to 15,000 cps, 2-2 db. TONE CONTROLS: 8ass 4-15 db at 50 cps; Trebte 4-15 db at 10,000 MUM LEVEL: 70 db below rated autput. INPUTS: 3; 2-Microphone and 1-Phono. CONTROLS: 6; Microphone-1, Microphone-2, on-off, Bass, Trebto, Phono, OUTPUT IMPEDANCES: 4-8, 16, and 250 ohms; 70 volts. POWER CONSUMPTION: 135 wats, 110/120 v.A.C. 50-60 cycles. SIZE: 14" w x 8" d x 6" h. SHIPPING WEIGHT: 20 lbs.

LAFAYETTE MODEL PA-62—Complete with Net

WEIGHT: 20 lbs.
LAFAYETTE MODEL PA-62—Complete with 49.50

4-SPEED PHONO TOP

For above amplifier. Fits in place of caver. Plays all speeds—16½, 33½, 45 and 78 rpm. Has constant 4-tiped motor, with furnover cartridge, complete with two precious metal needles. Has arm-rest and plug connection; for 110 Vall 60 cycle. Shpg. wt., 10 lbs. PA-65—4-Speed Phono Tap.........Net 16.95

. CHOICE OF DELUXE DYNAMIC MIKES

• TWO GE 25-WATT SPEAKERS • MONEY-BACK GUARANTEE

3 00000

AS LOW AS 105.00

ONLY 10.50 DOWN

The 30-watt system is one of our most popular models. Large enough for the

The 30-watt system is one of our most popular models. Large enough for the majority of sound system applications — used in thousands of school auditariums, churches, theotres, dance halls, dance studios and lecture halls. The ideal system for rentals; these systems have been sold to many hundreds of dealers.

AND REMEMBER OUR MONEY-BACK GUARANTEE AND OUR LOW, LOW PRICEI DUAL SPEAKER 30-WATT PORTABLE SYSTEMS INCLUDE: The outstanding feature-filted Lafayette Madel PA-62 30-watt amplifier; 2-GE 25-watt PM speakers; 2-35' speaker cables and plugs; your choice of the popular Argonne AR-3 All-Purpose Dynamic dual-impedance microphone for hand-held, desk stand are floor stand use, with removable boll-joint desk stand and floor stand dynamic for class-talking use where high-feedback problems exist, with 40-15,000 cpt response, an-off switch and 18' cable; the famous Atlas MS-10C floor mike stand; and the hand-amely designed spili-type partable carrying case covered in high quality dark blue leatherstles. Size af case 22½'fh x 10½'fw x 15'd — provides a secure place for the system companents. For 110-130 valts, 60 cps AC apperation. Shap, wt., 75 lbs.

LAFAYETTE PA-142 30-wat Portable System, Less Phona Top and less MS-10C floor mike stand.

Net 124-50

LAFAYETTE PA-143 Same as above, with E-V 664 dynamic microphone and MS-10C floor mike stand.

Net 124-50

LAFAYETTE PA-144 Same as PA-142 with 4-speed phona top.

Net 121-00

Net 121-00

10C floor mike stand
LAFAYETTE PA-144 Same as PA-142 with 4-speed phona tap....
LAFAYETTE PA-145 Same as PA-143 with 4-speed phona tap.

PA-29 E-V 727

## 10-WATT FIXED P.A.

COMPLETE PERMANENT SYSTEM
 CHOICE OF CRYSTAL OR DYNAMIC MIKE

• AMPLIFIER HAS LAFAYETTE'S MONEY-BACK GUARANTEE

AMPLIFIER MAS LAFAYETTE'S MONEY-BACK GUARANTEE
High quality, low cost system engineered for smaller permanent installations. For
areas up to 5500 sq. ft. fer office, store, gorage, small factory peging and music
systems. THE COMPLETE SYSTEMS INCLUDE: The new Lafayette Model PA-60
10-watt amplifier complete; your choice of either the Electro-Voice 727 crystal
microphone complete with detachable desk stand and 5' cable — ar the new
tafayette Model PA-29 weatherproaf, blast-proaf stim dynamic mike complete
with high or low impedance selector switch and detachable swivel-type stand
adaptar; 8" heavy duty PM speaker; 35" speaker cable and plug; and attractive
polished walnut speaker wall baffle. For 110-120 valts, 60 cps AC aperation. Shpg.
wt., 25 lbs. (Any ather micraphone may be substituted in all systems at additional
cost. See microphones in indes).
LAFAYETTE PA-140 Complete 10-walt Permanent System as described with E-V
727 Crystal Micraphone
LAFAYETTE PA-141 Same as abave, with Lafayette PA-29 dual impedance dynamic microphone

Net 37.50

Page 18

DYNAMIC

## MICROPHONES Fine Quality Save from 50% to 75% !!!

## HIGH QUALITY TOP NOTCH

CRYSTAL MICROPHONE

COMPARE IT WITH ANY MIKE AT 2 TO 3 TIMES THE PRICE

in lots of 3

singly, ea. 4.25

Lafeyette makes history with a high quelity CRYSTAL MICROPMOME at a price that is 60% less than any comparable crystal Microphone on the market today. Experable Crystal Microphone on the market today. Experient for PA systems, home recorders and general applications, Frequency response 30 to 10,000 cycles. Output level—52 db. provides ample output for use with low gain amplifiers. Uses quality moisture seeled crystal; Dic cast case in rich green baked enamel finish, with Chrome grill. Completely equipped with 5 feet of chrome grill.

PA-24-In lots of 3, each. Singly, each.



- . DUAL CRYSTAL CAR-TRIDGE5
- . ALL DIRECTIONAL
- . FINE QUALITY



Here is a microphane with a 360° pickup, and the added power and sensitivity of two individually shock mounted and phased crystal carridges. This arrangement assures you of maximum pickup from all sides. Swivel mounted to give fuller flexibility. Case is chrome plated. Standard ½".27 thread. Overall size 7" H x 3" W complete with 4 ft, cable. Shpg. wt. 4



## SLIM CRYSTAL MICROPHONE



A slim crystal microphone for desk top or hand-held use that is uniquely designed for universal application, smartily styled and attractively finished. Changes in temperature and humidity do not affect its afficiency, nor does increasing the coble length increase noise or change frequency characteristics. Ingenious swivel maunting permits horizontal and vertical rotation for most convenient angle of use. Microphone easily removed from base for holding in hand, Microphone, base, grill and all fittings are chrome finished. Has a wide renge smooth frequency response and an amni-directional polar pattern. Built-in locking type an-off slide switch. Microphone is only 5" long x 1" max, dla. Shpp. wt., 2 lbs.

PA-45—Microphone Complete with Stand.....Net 3.95

## NEW "DYNA-SLIM" MICROPHONE

- HIGH IMPEDANCE SO,000 OHMS
- · ON-OFF SWITCH
- . "QUICK-SLIP" ADAPTER

6.95

New dynamic, high autout micraphane with all the features at "mikes" casting 3 times. Lafayette's priced Output level —55 db. 5maath response from 60 ta 10,000 cycles. Omnidirectional hood. External an-aff switch. Slips an ar off stand adapter in a wink. Standard ½" — 27 adapter permits tilting mike for multi-angle use. Satin black and chrome finish. Complete with detachable cable and cannector. 8" long. 1½" max. dia. tapered barrel 7". Shag. wt., 2 lbs.
PA-43. — Net 6.95

PA-43\_\_\_



- . SAVE STEPS AND EXTRA PERSONNEL BY LOCALLY CONTROLLING THE VOLUME OF A REMOTE AMPLIFIER
- EASILY REPLACEABLE MICROPHONE CARTRIDGE AND VOLUME CONTROL

A high quality crystal microphone for use with P.A. systems recorders and other applications. Permits fingerlip control of the volume of a remotely located amplifier. This is a full size attractive unit with real eye appeal to complement its excellent performance—and of about one-third of the price of comparable microphones. The microphone has a frequency response of 30-10,000 cycles and autput level of 52 db. Cames with 5 ft. shielded cable. Has ½-27 thread fitting for mike stand. Andsome black high-impact resistance plastic case with chromed griff. Size 2½" H x 4" D-x 2½"—griff diameter. Shpg. wt., 2 lbs.

PA-44 Microphane.





## LAPEL MICROPHONE

- SS db. OUTPUT LEVEL! IDEAL GENERAL PURPOSE MIKE

Ideal general purpose mike. Specially engineered crystal Microphone. Attaches to lopel. Only 13½" in diameter. Exceptional frequency response. Output level — 55 db. Chrome plated case and clip for attaching to lopel. Includes 5 ft. of shielded cable. PA-9

Net 1.95 Net 1.95

## "WRIST WATCH" CRYSTAL MICROPHONE

- SENSITIVE
- · HIGH OUTPUT
- . PERFECT FOR SECRET PICKUPS
- . APPEARS & IS WORN EXACTLY LIKE A REAL WATCH

PA-47-"Wrist-Watch" Crystal Mike.



NEW! CRYSTAL THROAT MICROPHONE

HIGH SENSITIVITY—HIGH OUTPUT FOR USE
WITH ANY AMPLIFIER OR TRANSMITTER WITH
CRYSAL MIKE INPUT IDEAL FOR AIRCRAFT,
AMATEUR, INDUSTRIAL COMMUNICATIONS,
AUCTIONS, PITCHMEN, CARNIVALS, SALESMEN
COMPLETE WITH NECKSTRAP—LEAVES HANDS

A crystal throat microphone with a myriad of uses! Its high sensitivity and high autput permits its use with any standard high impedance crystal microphone input. Its relatively wide frequency range provides on high degree of intelligibility far voice in public address or communications work. Requires no special power supply as darbon-type throat mikes. Complete with flexible neckband and flexible 5½° cable (less cannectar). Shpg. wt., ½ ibs.

## SLIM DYNAMIC MICROPHONE

- DUAL IMPEDANCE 50,000 AND 250 OHMS
  - HIGH OUTPUT
- 50-11,000 CYCLES USE ON STAND OR AS

The latest design in slim type microphones. A high-autput dynamic mike of exceptional audity. Has very smooth resonnes from 50-11,000 cyclos. Built-in external switch gives you cles. Built-in external switch gives you clos of either high impedance (250 000 ohms) or low impedance (250 ochms). Omni-directional tiltable head. On the standty removable sb mike can be handheld. Has can standty removable sb mike can be handheld. Has can standty removable sb mike can be some sticilly correct case with satin-chrome finish and acoustically correct case with satin-chrome finish and acoustically correct didm. barrel. Shpg. wt., 2 lbs.

PA-29 In late of 3, Each

9.25

In lots of 3, Each 9.25 Single, Eoch 9.95

## NEW DYNAMIC MICROPHONE FOR DESK-TOP, HAND HELD, OR LAVALIER USE



NOW! only 6.95 Reg. Value 29.50-HIGH IMPEDANCE—50,000 OHMS
RESPONSE—40-9,500 cps

Beautifully designed and attractively finished high impedance, light weight dynamic microphone with swively mount that permits hartzontal and vertical rotation for most convenient angle. Microphone quickly and easily released from telt-lined base clamp for holding in hand are far clamping to neck band for use as lavalier microphone. Baked enamel case with chrome finished base printed and fittings. Ruggedly constructed to withstand plenty of Kandling. 3 long x 1½" diam, housing with \$5 ft. shielded cable.

PA-48-Shipping wt., 2 lbs ...

## **ASTATIC M-150** RECORDER MIKE

- AMAZING PERFORMANCE AT
- AN AMAZINGLY LOW PRICE IDEAL REPLACEMENT MIKE

FOR TAPE RECORDERS

A new high quality crystal microphone especially engineered for recorder use. Has a frequency response of 30-10,000 cps and an autput level of -44 db. Housed in campact, lightweight, conveniently-held high-impact ivory plastic case having gold, rigidized metal grille. Cames with 5 ft. extra flexible, single conductor shielded cable. 2-3/16" x 2½". 2-3/16" x 2%". ASTATIC M-150 RECORDER MIKE ...



## HARMONICA CONTACT MICROPHONE

This is a fine quality, sensi-tive, crystal contact micro-phone with a high output that is especially decision.

phone with a high output that is especially designed to fit harmonicas. When the relatively weak sound of a hormonica is amplified, the remaining of the property of the sound of a phonograph, or radio. Installation is simple. The microphone brocket silps under the connect to the amplifier system. It is structly built and measures anly 1½" L x ¾" W x ¾" D. Complete PA-35.



## VALUES! MIKE STAND

SPECIAL

Economical desk stand. Chrome plated; heavy cast base finished in gray wrinkle. 41/6" diam., 7" h. Felt pad; 1/4" -27 thread; adjustable callar. Shpp. wt., 2

Not 1.29



Standard single cantact, card mounted, nickel plated brass knurl grips, 3/4"-27 thread.

POPULAR MIKE CONNECTORS

M5-468 Male connector




A sturdily constructed case for amplifier and two 12" speakers. Made of heavy plywood with reinfarced metal corners. Case splits into 2 baffles, each with leather carrying handle. Strong wire mesh grilles cavered with attractive cloth. Has Z haoks in each half for carrying speaker cobles and provisian for mike and mike base. 4 snap lacks. Inside dimensions 20½ h, 15-9/16w, 14½ d. Covered in dark blue washable leatherette. Shpg. wt., 20 lbs.

## STUDIO DYNAMIC MICROPHONE



HOME, OFFICE OR STUDIO



• HIGH IMPEDANCE-50,000 OHMS. · HIGH OUTPUT

REG. 49.50

## DUAL IMPEDANCE SLIM DYNAMIC MICROPHONE

- RUGGEDLY CONSTRUCTED
- ON-OFF SWITCH LECTED BY SIMPLE ROTATION OF PLUG

Beautiful, professional-looking dynamic with solidly-cost, tapered, slim case with satin-chrome finish. Heavy dry slide-type an-off switch. Bullt-in transformer supplies dual unbalanced impedances—low Z is 600 ohms, high Z is 50,000 Ohms. Swivel mount fits oil standard ½".27 threaded stands. Blast filter eliminates unpleasant "pops" with voice use. Omnidirectional when used vertically—cordioid pattern when titled. Engineering design and finish are of the highest quality, making this microphone excellent for any application. Camplete with 5 ft, plug-in cable. Shap. wt., 2½ lbs.

## ARGONNE ALL-PURPOSE DYNAMIC MICROPHONE

- DUAL IMPEDANCE-250 & 50,000 OHMS
- . USABLE RESPONSE 50-18,000 CPS . FOR HAND-HELD, DESK
- OR FLOOR STAND USE
- IDEAL FOR TAPE RECORDING, PAGING, COMMUNICATIONS

PAGING, COMMUNICATIONS

Here is a flexible dynamic microphone with characteristics suitable for almost only application.

Ruggedly constructed, with topered cost-metal body and removable base for desk use. Mounts to the base by means of a 360°-swivel adjustable bell joint and fitted with an adopter for standard 5/2"-27 floor stand. SPECIFICATIONS: FREQUENCY RESPONSE—Procticolly flat 80-10,000 cpt. ± 5 db 70-13,000 cps. OUTPUT—70 db below 1 volt/microbar at 1,000 cps. DUAL IM-FEDANCE: Low (250 ohms), High (50,000 ohms) unbalanced. Size 9° high (with base), 2° diam, at head, tapering down to 3/4". Bose diam. 4-13/16", 13/4" high. Shpp. wt., 6 lbs.

AR-3—Dynamic microphone, complete





## Uette Sensational! STEREO

## GENERAL ELECTRIC VR-22 STEREOPHONIC MAGNETIC VARIABLE RELUCTANCE HIGH FIDELITY CARTRIDGES



- FREQUENCY RESPONSE 20-17,000 cps
- UP TO 30 DB CHAN-**NEL SEPARATION**
- VIRTUALLY HUM-FREE
- HIGH COMPLIANCE

MODEL VR-277 with .7 mil diamond stylus. Absolutely the finest of all G.E. cartridges. Combining new design and manufacturing techniques with proven variable reluctance excellence, this cartridge is made virtually hum-free by mu-metal shielding on tap, entire front and coil assembly. Harmonic and intermodulation distortion are effectively minimized by a lack of resonant peaks in the oudio range, and an essentially linear flux field. Precise tracking and optimum compliance are assured by new stylus and armature suspension system. The stylus is easily changed without the need for special tools. Output is closely balanced over entire frequency range (one db at 1000) cycles) for equal sound volume from both channels. A ground strap allows use of this cartridge with either 3-or-4-wire stereo systems; the cartridge shield may be grounded individually by a separate wire. SPECIFICATIONS: FREQUENCY RESPONSE: 20-17,000 cps; OUTPUT: 6 mv. per channel at stylus velocity of 5.5 cm/sec; INDUCTANCE: 420 mh. per chonnel; CHANNEL SEPARATION: up to 30 DB; LATERAL COMPLIANCE: 3 x 10° cm/dyne; VERTICAL COMPLIANCE: 2 x 10° cm/dyne; RECOMMENDED LOAD, EACH CHANNEL: 47,000 ohms; RECOMMENDED TRACKING FORCE: 5 to 7 gms: SHPG. WT., 6 oz.

MODEL VR-225 with .5 mil diamond stylus. Designed expressly for use with transcription arms and turntables. Essentially the same as VR227 except FREQUENCY RESPONSE: 20-20,000 cps; LATERAL COMPLIANCE 4 x 10° cm/dyne; RECOMMENDED TRACKING FORCE: 2 to 4 gms. SHPG. WT., 6 oz.

## GE 28-WATT MATCHED STEREO PHONO SYSTEM



GE MS-2000 28-WATT AMPLIFIER NEW COLLARO TSC-740 WITH SHIELDED MOTOR

(Less Base). NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
2-ELECTRO-VOICE SP12B 12" SPEAKER @ 34.30

MF-S89 Complete stered system as listed above. Shpg. wt., S9 lbs. Net 219.73

Recommended enclosures for HF-589 system are the CAB 16 Series Resonator Enclosure ar

Resonator Enclosure or
Lafayette Eliptoflex Series Bookshelf Enclosure. Set at 2 57.50
(Please specify finish).
MF-590 Same as MF-589, but with
2 Lofayette—SK-125 3.Way Ducted
Port Speaker Systems. Shpg. wt.
64 lbs.
PK-111—Base cut for Caltora TC740. Specify mahagan, blande or
walnut finish. Net 3.95

FISHER TA-600

SERIES BOOKSHELF ENCLOSURE

New GE VR-22

.7 MIL)

DIAMOND

CARTRIDGE

STEREO

68.60 Regular Catalog Price 274:65

24.45

LAFAYETTE SYSTEM

You Save 54.92

21.97 Down 14.00 Monthly

Wish

## HARMAN-KARDON A220 20-WATT STEREO HI-FI PHONO SYSTEM

H-K A220 20 WATT STEREO AMPLIFIER 79.95 COLLARO TSC-740 WITH COMPLETELY SHIELDED MOTOR 41.65 24.45 NEW GE VR-22 (.7 MILI DIAMOND STEREO CARTRIDGE 35.00 2- LAFAYETTE SK-124 BOOKSHELF SPEAKER SYSTEMS @ 17.50

Regular Catalog Price 181.03

LAFAYETTE SYSTEM PRICE

139.95

You Save 41.10

14.00 Down 10.00 Monthly

MF-591 Complete stereo system as listed above. Shpg. wt., 62 lbs. Net 139.95
MF-592 Some as MF-591, but with 2-Lafayette Famous Free Edge 5K-58 12" Coaxial speckers and 2 CA8-16 Series Resonator Enclosures. Shpg. wt., 132 lbs. Net 179.04
MF-593 Some as MF-591, but with 2-Lafayette Famous Free Edge 5K-58 12" Coaxial speakers and 2-Lafayette Eliptoflex Series Bookshelf Enclosures. Shpg. wt., 104 lbs. Net 179.04
KK111 Bose cut far Collara TSC-740 Specify mahagany, blande or walnut finish. Net 3.95

## • SELECT YOUR OWN CARTRIDGE • You may substitute the Shure M7D, Pickering 371.7D or the new Electro-Voice 31MD7 in any system shown with the GE VR-22 at no

FAVETTE SK-124

BOOKSHELF

SPEAKER SYSTEMS

additional cost. The Shure M3D may be substituted at an additional cost of \$24.00

## SCOTT 24 WATT STEREO PHONO SYSTEM



SCOTT 222 STEREO AMPLIFIER (Less Case) GARRARD RC-121/II STEREO CHANGER NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE

2 STEPHENS 80 FR 8" SPEAKERS @ 33.50 Regular Catalog Price 273.03

LAFAYETTE SYSTEM PRICE

PRICE

HF-575 Complete stereo system as listed above. Shpg. wt., 51 lbs.

MF-576 Same as HF-575 but with 2-Lafayette Famous Free Edge SK.-581 2" Coaxial speakers and 2 Lafayette Ellptoflex Series Bookshelf Enclasure. Shpg. wt., 108 lbs.

Net 264.95

PK-111 Wood Bose cut for RC-121 specify mahagany, blande ar walnut finish.

Net 395.

Scott D Cose for Scott 222 Amp.

Net 9,95

You Save 54.60

139.95

67.00

21.84 Down 14.00 Monthly

37.76

Down

21.00

## COMPLETE FISHER STEREO PHONO SYSTEM

FISHER TA-600 STEREO TUNER AND AMPLIFIER 349.50

(Less Cabinet) GARRARD RC-88 DELUXE CHANGER NEW G.E. VR-22 (.7 MILI DIAMOND STEREO CARTRIDGE 24.45

2-UNIVERSITY 312 12" TRIAXIAL 143.08 SPEAKERS @ 71.54 Regular Catalog Price -575:34

You Save LAFAYETTE SYSTEM PRICE 115.06 46.02 Down 27.00 Manihiy 460.28

HF-571 Complete system as listed above. Shpg. wt., 74 lbs. Net 460.28 Recommended enclosures for above system ore: CAB-16 Series Resonator Enclosure ar Lafayette Eliptoflex Series Bookshelf Enclosure.

Set of 2 57.50 (Please specify finish.) HF-572 Same as HF-571, but with 2 5K-114 12" 3-way speakers with 6% tb. magnets and 2 Lafay-ette Eliptoflex Series speaker enclasures, [please specify finish] Shgp. wt., 170 lbs. ..Net 545-54

PK-111 Wood base cut for RC88, specify ma-hagany, blande or walnut finish. ......Net 3.95



## HARMAN-KARDON A-250 50-WATT STEREO HI-FI PHONO SYSTEM

H-K A250 STEREO AMPLIFIER (Less Cage) GLASSER-STEERS GS-77 (Less Base) NEW GE VR-22 (.7 MILI DIAMOND STEREO CARTRIDGE 179.95 59.50 2 UNIVERSITY 312 SPEAKERS @ 71.54
2-LAFAYETTE ELIPTOFLEX SERIES
BOOKSHELF ENCLOSURES @32.50 143.08

65.00 Regular Catalog Price 471.98 LAFAYETTE SYSTEM PRICE

**377.60** 

Monthly You Save 94.38

HF-581 Camplete stereo system as listed obove.
Shpg. wt., 123 lbs. Net 377.60
HF-582 Some os HF-581, but with 2-Lafayette
5K-112 12" 3-Way speakers with 3½ lb. magnets and 2 Lafayette Eliptaflex Series Boakshelf
Enclosure. Shpg. wt., 152 lbs. Net 390.00
Model GSB Woodbose far GS-77 in ebony with
satin brass trim, ar unfinished. Net 9.60
H-K AC-50 Enclosure for H-K A-250 Amp.
Net 12.50

PILOT 240 30-WATT STEREO HI-FI PHONO SYSTEM PILOT 240 30 WATT STEREO AMPLIFIER 129.50 GARKARD RC/121/11 CHANGER (Less Base) NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE

2-ELECTRO-VOICE SP128 12" SPEAKERS@ 34.50 Regular Catalog Price 264.20 You Save

SYSTEM PRICE 211.36 52.84 14.00 Monthly

14.00 Monthly
HF-573 Complete stereo system as listed above. Shpg.
wt. 60 lbs. ....Net 211.36
Recommended enclosures for
HF-570 system are the: CAB16 Series Resonator Enclos-(Please specify finish).
PK-111 Wood Base cut for RC121 specify mahagany, blande or walnut finish.
Net 3.95

Lofayette Ellptoflex Series Bookshelf Enclosure. (Please specify finish). Set of 2 57.50 HF-574 Same as HF-573,



GENERAL ELECTRIC DELUXE 40-WATT STEREO PHONO MUSIC SYSTEM

GE MS. 4000 40. WATT STEREO AMPLIFIER GARRARD RC-88 STEREO CHANGER (Less Base) NEW GE VR-22 1.7 MILDIDAMOND STEREO CARTRIDGE 2-JENSEN TR-10 TRI-ETTE SPEAKER SYSTEMS@114.50 Regular Catalog Price 491.71

HF-577 Complete GE phono system. Choice of GE 4000 Amp. Grey and Silver or GE 4010 Amp. Brown and Gold. (please specify). Shpg. wt., 123 lbs. Net 393.37

PK-111 Wood base cut for RC 88 specify mahagany, blande or walnut finish. Net 3.95

LAFAYETTE SYSTEM PRICE

393.37 You Save 98.34

39.33 Down 24.00 Monthly



## BOGEN 60 WATT STEREO PHONO SYSTEM



BOGEN DB230A STEREO AMPLIFIER GLASSER-STEERS GS-77 STEREO CHANGER

(Less Base)
NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
2-UNIVERSITY 312 SPEAKERS @ 71.54 24.45 143.08

. 6 - 6 6 4

SCOTT 299

(.7 MIL)

STERED

DIAMOND

CARTRIDGE

Bagen CEG cabinet with less for DB230 Net 8.00

59.50

## **BOGEN 24-WATT STEREO** PHONO SYSTEM

BOGEN DB212

BOGEN DB212 24 WATT STEREO AMPLIFIER (Less Cabinet) GARRARD RC121/II STEREO CHANGER (Less Base)
NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 2-UNIVERSITY UXC 122 @ 34.79

988

New GF VR-22 (.7 MIL)

41.65 24.45 69.58 Regular

119.95

Catalog Price 265.63

LAFAYETTE SYSTEM PRICE

You Save 51.12

20.45 Down 14.00 Monthly

HF-568 Complete Bogen system os listed above. Shpp. wt., 61 lbs. Net 204.51 HF-569 Some as HF-568 but with 2-Lafayette SK-58 12" Co-oxial speakers and 2-CAB-16 Series Resonator Enclosures. Shpg. wt., 137 lbs. Net 244.50 HF-570 Same as HF-568 but with 2-Lafayette SK-58 12" Co-oxial speakers and 2-Lafayette Eliptoflex Series Bookshelf Enclosures. Shpg. wt., 121 lbs. Net 249.50 PK-111 Wood Base cut for RC-121, specify finish in mahagany, blande or world. Shpg. wt., 5 lbs. Net 3.95 Bagen BEG cobinet with legs for

Bogen BEG cobinet with legs for DB212 ......Net 7.50

LAFAVETTE CAB-16 SERIES RESONATOR ENCLOSURES

● SELECT YOUR OWN CARTRIDGE ●
You may substitute the Shure M7D, Pickering 371.7D or the new
Electra-Vaice 31MD7 in any system shown with the GE VR-22 at na additional cost. The Shure M3D may be substituted at an additional cost of \$24.00

Down

21.00

Monthly

## PILOT SM-245A 40 WATT STEREO HI-FI PHONO SYSTEM



PILOT SM-245A 40 WATT STEREO AMPLIFIER GLASSER-STEERS GS-77 STEREO CHANGER 199.50

(Less Base) NEW GE VR-22 (.7 MIL)

DIAMOND STEREO CARTRIDGE 2-ELECTRO VOICE 12TRXB

2-ELECTRO VOICE 12TRXB
12" SPEAKERS @ 61.68
HF-579 Complete stereo system
as listed above. Shpg. wt. 71
lbs. Net 330.35
Recommended enclosures for HF579 system are the CAB-16 Series
Resonator Enclosure.
Lafayethe Eliptoflex Series Bookshelf Enclosure. Set of 2 57.50
(Please specify finish).

Please specify finish].

HF-580 Same as HF-579 but with 2-Lofayetle Famous Free Edge 5K-58 12"Coaxial speckers and 2 Lofayetle Eliptofiex Series Bookshelf Enclosures, Shop wit, 113 lbs.

Net 329.00

Model GS8 Woodbase for GS.77 in ebony with saith bross trim, or unfinished.

Net 9.60

Net 9.60

129.36 Regular Catalog Price A12.81 LAFAYETTE SYSTEM PRICE

59.50

24.45

## SCOTT 40 WATT STEREO PHONO SYSTEM SCOTT 299 40 WAIT STEREO AMPLIFIER (Less Cage)

GLASSER-STEERS GS-77 STEREO CHANGER

NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE

24.45 2-UNIVERSITY 312 12" TRIAXIAL SPEAKERS @ 71.54 143.08 Regular Catalog Price 424.98
LAFAYETTE SYSTEM PRICE

You Save 85.38

HF-588 Some as HF-587, but with 2-Lofayette SK1"2 12" 3-Way speakers with 3½ 1b magnets and 2 Lafayette Eliptoflex Series Bookshelf Enclosure, Shop. wt., 147 Jbs. Net 406.50 Model GSB Woodbase for GS-77 in ebony with satir brass trim or unfinished. Net 9-60 Scat C cage for Scatt 299 Amplifler .....Net 9.95



## COMPLETE HARMAN-KARDON

STEREO SYSTEM

H-K TA230 STEREO FESTIVAL (Less Cage)
GLASSER-STEERS GS-77 (Less Base)
NEW GE VR-22 (.7 MILI DIAMOND STEREO

2-ELECTRO-VOICE 12TRXB12"SPEAKERS @ 62.68 125.36 125.36 Regular Catalog Price 449.20 LAFAYETTE SYSTEM PRICE 37.54 375.42 Down

Monthly You Save 93.84

HF-584 Same as HF-583, but with 2-Lofayette SK-112 12"3-Way speakers with 3½ lb. magnets and 2 Lofayette Eliptoflex Series Bookshelf Enclosures. Shpg. wt., 103 lbs. ...Net 454.50

AC 30 Copper and Black metal enclosure for HK-TA230 Net 12.95 WW 30 Walnut or FW 30 Fruitwood hard wood enclosure. HK-TA230 Net 29.95 Model GSB Woodbase for GS-77 in ebony with satin brass trim, or unfinished. Net 9.60



## (A) SPECAL TUBULAR FIBREGLASS SPINNING ROD

GENUINE TUBULAR SUPER GLASS ROD • STANDS ROUGHEST ACTION-NEEDS MINIMUM CARE • SOLID-COMFORTABLE.

NATURAL CORK GRIP • SINGLE WIRE NON-FOULING GUIDES

A first quality tubular (hallow) fibreglass spinning rad—plenty of power, action and eye appeal. All the features of rads selling for above Lafayette's price. Solid-camfartable-natural cark handle with anadized aluminum reel retaining rings. Holds reel solidly and securely. Extra large guides with neat, even nylon wrapping. Sealed against maisture. Long, strong extra deep joining ferrule precisely filted. Guides are hard-rust resistant—and properly spaced. Braced tip-top guide, Entire rad finished in hard, durable, black larger. Popular 2 piece, 5 foot length. Shpg., wt., 1½ lbs.

TT-501 FIBREGLASS SPINNING ROD.

(B) TUBULAR FIBREGLASS SPIN-CAST ROD

• 51/2 FT. MEDIUM-LIGHT ACTION • POSITIVE LOCK REEL SEAT

Finest 2 piece, hallow fibreglass, medium-light action spin cast rod. Five inch web, shaped cork grip on a die cast aluminum offset handle. Positive, threaded ring, locking reel seat. Designed for closed face spin cost reels! Chrome plated, stainless steel guides and broced, offset fip-top. Chromed, stainless buttplate. Extra deep, precisely fitted ferrules. Calarful, sealed, nylon wrappings. Fine action with plenty of back bone. Casts flies, streamers, bugs and poppers. Shpg. wt., 1½ lbs.

FT-503 FIBREGLASS SPIN-CAST ROD

(C) TUBULAR FIBREGLASS "7 SEAS" SPINNING ROD • FOR FRESH AND SALT WATER SPINNING! • ACTUAL WEIGHT ONLY 5 OZS.! • COMPARE TO RODS SELLING FOR TWICE AS MUCH

All the extra power you need to land the "big ones"—In fresh or salt water. Hollow glass construction for that "live" action—plus "back-bone" when you need it. 4" cork fore grips 6½" cork butt with vlnyl butt plate. Extra-large, non-fouling, diamond-hard guide. "Snake" design allows guides to flex with rad. Braced tip top of super-hardened, stainless steel. Fixed reel seat polished brass with chrome retaining callar and lack nut. Glossy black lacquered finish. Calorful, sealed nylon windings.2 piece blade with extra deep ferrules. Overall length 6½ ft. Superbly tapered—designed for maximum lure action-trouble free construction. Shpg. wt., 1 lb. FT-502 FIBREGLASS SPINNING ROD.

## (D) SPECIAL SPINNING REEL

GOLD ANODIZED SPOOL ONYLON BEVEL GEAR OANTI-REVERSE LOCK

A fine, light spinning reel with all the features found in far more expensive reels. Strang-sturdy handsome appearance. Selective antireverse lock. Chrome plated pickup arm. Body of non-corroding, ebony finished, aluminum alloy. Housing and spool of gold anodized aluminum far maximum carrosion resistance. Noiseless, smooth running, nylon bevel gear. Hondle is removable for storage.
Holds 200 yds. of 4 lb. test line. Gear ratio of 3 to 1. Shpg. wt., 1 lb

FT-512 SPINNING REEL

Not 2.95

(E) PUSH BUTTON SPIN CAST REEL

Closed face—back lash free—push button action. Push button spring release—assures Instantaneous line control the moment the lure hits water. Bross Gears—precision machined to assure long, trouble-free service. Finger-tip Anti-Reverse Lever—for fast action. Spring Loaded Geared Drag Adjustment—may be set for any tension. Attractively finished in triple lacquered ebany with gold-anadized spool cover. Chrome plated double handle crank. Incorporates the features and trouble-free performance of the most expensive reels. Complete with 80 yds. of 6 lb.,limp monofilament line and rubber practice plug. Actual weight only 8½ azs. Shpg. wt., 1 lb. FT-516 PUSH BUTTON SPIN CAST REEL.

## (F) NEW! "SPIN-TACULAR" REEL

• INTERCHANGEABLE SPOOLS • FINGER TIP ANTI-REVERSE

Finest-fastest imported spin reel. Ultra smooth recovery, ratio about 4 to 1. Full boil, stainless pickup. Positive, smooth drag with click built into spool. Friction free line guide of diamond-hard tungsten carbide. Positive anti-reverse clutch—no manual holding when playing, netting or trolling. Metal reel with two interchangeable spools. Capocities of from 200 yds. of 10 lb. line, 340 yds. of 6 lb. line, 100 yds. of 4 lb. line, down to 200 yds. of 7 lb. line. "Natural-farm" knob on reel hondle, handle folds bock for storage. Corraion resistant black finish. Complete with extra spool, spool case, cloth bag and instructions. Actual weight 9 azs. Shpg. wt., 1 lb. 4 oz. FT-513 "SPIN-TACULAR" REEL

## (G) NEW! "7 SEAS" SPIN REEL

• ALL THE FEATURES OF THE MOST EXPENSIVE REELS

The "greatest" for surf-casting, trolling, spinning or any salt water Fishing. High pressure moulded of an aluminum-magnesium alloy, surface treated and anti-corrosion coated. Eliminates need for the usual care and cleaning associated with salt water gear. Unique planetary gear system crosswinds line for greater line capacity and the smoothest, langest casts you ever made! "Back-labs" is a thing of the past. Fully adjustable, positive drag action. Built right into the spool for smooth, constant tension. Full ball pick up of stromed bronze. Line guide of super hard chromium carbide. Torpedo handle, spring loaded, folds back for storage. Positive, finger tip anti-reverse control. All the features normally found in the most expensive reels. Actual weight 19 ass. Shps. Mt., 2 lbs. FT-514 "7 SEA5" SPIN REEL

(H) "7 SEAS" TROLLING REEL

• FINGERTIP FREE SPOOL CLUTCH • ADJUSTABLE STAR DRAG

Universal salt water reel. Powerful star drag, free spool, fast retrieve. All metal construction of highly carrosion resistant alloys. Aluminum-magnesium alloy spool. 3 Inch diameter side plates—with satin black, triple baked, rust resistant, permanent finish. Conventional free spool lever. Mardened bronze gears. Counter weighted, tarpedo handle. Chrome plated, hand polished frame. Self lubricating, long lasting bronze bearings. Capacity 250 yds. of 27 lb. line. Actual weight 17 ozs. Shpg. wt., 1% lbs. FT-515 "7 SEAS" TROLLING REEL. Net 7.95

## SAVE NOW • Special Sports Sets These matched sets save you even morel Specially selected top quality-latest designs. Combinations selected for ease of handling-include all necessary basic equipment-offer you more fishing fun and

(H)

7.95

enjoyment at budget prices. Items sold separately cost more—you save by purchasing the complete set. Check these kits for features found only in much higher priced equipment.



Special Spin 5ets "Best-Buy" spinning outfit. Especially desirable for beginners—fine enough for the "old-pro." Set includes: Tubular fiberglass 5 ft. spinning root (FT-501), simple-to-use, light spinning root (FT-512), 200 yds. of 6 lb. manofilament line (FT-527), 24 finest, divided wing flies (FT-531), rigid polyethylene tackle box (MC-25). If purchased separately would cost 10.47.
FT-505 Shap wt. 4 lbs. Net 8 00

would cost 10.47. FT-505 Shpg. wt., 4 lbs. ..Net 8.99

"Push Button" Spin Cast Set: An easily handled casting set. Designed to give the fisherman complete cantrol. Most papular outfit—contains all necessary basic equipment. Set includes: 5% ff. glass spin-cost roe (FT-503), "Push Button" spin cast ree! (FT-516) pre wound with 80 yds. of 6 lb. manofilament line, practical plug, 12 selected "pappers" (FT-529), and rigid, polyethylene tackle bax (MC-25). Shpp. wt., 5 lbs.

PT-506 Net 10.29

(D)

PT-512 SPINNING REEL

(F) FT-513



(E) FT-516 PUSH BUTTON

FT-514 "7 SEAS"
SPIN REEL



(FT-502)

9 "Spin-Tacular" Spinning Set. The finest all 'round spinning gear for the money. Suitable far both fresh and light solt water spinning. Matched campanents far ease in handling, lang life and extra enjayment. Set Includes: 6½ ff. th. allow glas: "7 Sea" rod (FT-502), "Spin-Tacular" all-purpose spinning real (FT-513), 200 yds. 8 lb. manofilament line (FT-528), 24 "New England" Solmon streamers (FT-532), riaged eet lure (FT-525), and rigid polyethylene tackle bax (MC-25). Shpg. wt., 5½ lbs.



MINIATURE IMPROVED 8.33 HOIST

SMALL ENOUGH TO FIT YOUR POCKETE PRE LUBRICATED FOR LIFE! LIFT 1000 TO 2000 POUNDS!

The only truly miniature haist available, Indispensable in industrial plants and workshops. Perfect for huntersboaters-airplane awners-motorists. Great strength and thay size permits hundreds of uses — can be a real life story in an emergency. Made af high grade aluminum with steel oxles. Prelubricated for life. Two lifting stings — one on op and one at bottom — with heavy, welded steel rings. Nylon cable supplied tests at 550 lbs. per strand. "Midget" hoist comes with 70 ft, of Nylon cable, ho s 5 to 1 ratio — 1000 lbs. test — and weighs only 13 oz. "Tiny" hoist has 100 ft. of Nylon cable, o 7 to 1 ratio — 2000 lbs. test — and weighs only 15 oz. Does all your lifting safely and easily.

HD-330—"Midget" shpg. wt. 11/2 lbs. ..... HD-331—"Tiny" shpg. wt. 2 lbs. .....

## MAP MEASURER & COMPASS

1.59

- Not a gadget—but a real in-strument. · Measures distances an any size
- Measures curved or irregular

Exclusive at Lafayette! A map measurer with built-in compass! For the motorist — camper — hunter — boating enthusiast. An indispensable unit of equipment. Just trace along route on map and multiply milet—per inch factor by reading on dial. Also reads directly in inches up to 39". Built-in magnetic compass has cardinal and secondary points—full 360" markings in tenths. Accurate and dependable. Complete with leather sheath. Shpg. Wt. 8 ox.

F-47 LIST 2.75 Net 1.59

## **Burgess BOAT-LITE KIT**

Easy To Install — No Extros To Buy
 Meets U.S.C.G. Requirements

For All Class "A" And Class "?" Boots Running Light And Stern Light

Running Light And Stern Light

New Burgess Boat-lise kit-full at features never before offered to small boat owners. Cantains every thing needed to meet U.S. Coust Guard requirements for lights an small boats. New cambination bow light with aptically perfect Red-Green fresnel lens. Prajects light over one mile. Correctly shielded-made of special corrosion-resistant aluminum allay. New stern light-flag staff has unique plug-in feature. Quick-easy removal for safe keeping. No noits, screws or clamps just plugs in. Catrosian-resistant aluminum allay with lamp visible far 2 miles. Kit includes heavy-duty, 6 volt, sealed-in-steel bottery, all necessary hardware, mounting brackets, wire, weather proof switch and instructions. Shpg. Wt., 7 lbs. Burgess 8K-100. List 17.95. Net 8.20


## Pocket Generator Flashlight NO BATTERIES-EVER! • ALWAYS READY TO OPERATE!

The perfect pocket flashlight for home car or to carry with you. Plenty of bright light just by successive activation of generator level. No batteries to corrode or go dead. Balanced flywheel generator for ease of operation. Only 2% x 1" x 1½", slips easily into pocket or purse. Never wears out. Ideal for campers—tourists motorists. Weighs only 6 ozs. Made in Germany

F-169 List 6.49 Shpg. wt. 1 lb. Net 3.79





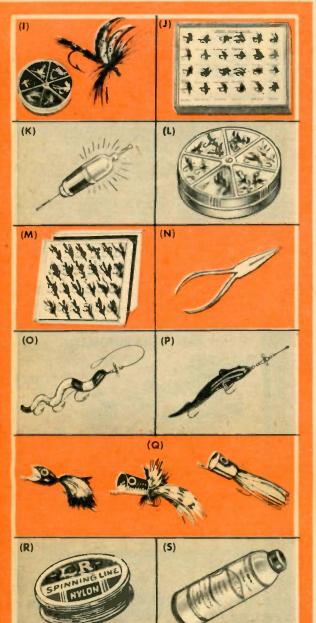

## (I) "DIAL-A-FLY" ASSORTMENT

One dozen of the most popular files available. Expertly tied by skilled craftsmen. Packed in a round, plastic, six compartment container. Selector cover rotates for instant choice. Pocket sixe-handy-snag proof. Includes such favorites as Royal Coachman, Black Gnat, Silver Doctor, Parma Belle, Yellow Sally and Mosquito all tied on #10 hooks: Shpg. wt., 6 azs.

FT-530 "DIAL-A-FLY" ASSORTMENT Net .89

(J) 24 ASSORTED WET AND DRY FLIES

24 hand tied-expertly detailed-most popular flies. The perfect kit for the beginner or old pro. All tied on #10 hooks. Includes such famous types as Royal Coachman, Black Gnat Ifemale), Red Ibis, Silver Doctor, Quill Gordon, etc. Each fly is Individually identified. Made with universally accepted fly materials. Wt., 8 ox. MD-328 24 ASSORTED WET AND DRY FLIES

Net 1.05

(K) "BITE-A-LITE" FLOAT

Flashes at a nibble Watertight Body! Adjustable Contacts! Doubles your "luck" and fun while night fishing. Excellent on cloudy doys, at dawn ar sunset. So sensitive even beginners do well, flickers at a nibble—lights with a bite. Can be used as a colorful sensitive float even without the battery and light, Self-contoined miniature battery and bulb are easily replaced. Long battery life. Made of corrosion-proof plastic and brass. Weighs less than 1 oz. with battery. Complete with bulb and instructions, Less battery. Shpg. wt., 4 oz.

MD-344 "BITE-A-LITE" FLOAT

Net .98 2 for 1.69

Net .08

(L) 24 DIVIDED WING FLIES Finest quality, hand tied dry flies. Skillfully made with just the right amount of natural-tip hackle. Upright divided wings cocked well forward. Decorated silk bodies. Favorite patterns: Black Gnat, Silver Doctor, Royal Coachman, Yellow Sally, Parma Belle, Etc. Compare to flies selling as high as .30 each! #10 hook. Shpg. wt., 8 ozs. FT-531 24 DIVIDED WING FLIES

## (M) 24 ATLANTIC SALMON STREAMERS

Famous "New England" streamer flies. Resemble small, live minnows in the water. Beautifully dressed and fitted with jungle feathers tied in at the head. Alf dressing tight and smooth. Two dozen all time favorites tied on long shank No. 2 hook. Includes Black Ghost, Light Tiger, Aunt Ider, Gray Ghost, Parmachene Belle, Jack Scott, etc. No two alike. Regularly sell as high as .49 ea. all 24 identified on lobeled card. Shpg. wt., 12 ozs.

FT-532 ATLANTIC SALMON STREAMERS

Net 2.39

## (N) FISHERMAN'S 8" LONG NOSE PLIERS

HARDENED TEMEPERED STEEL
 KNURLED SURE GRIP HANDLES
 A sturdy all purpose 8" Long Nose Plier especially suited for the fisherman. Made of rust resistant drop forged steel—ideal for use as leader bender, hook remover, wire cutter—literally scores af uses in the fishing boat or workshop. HD-S1 8" LONG NOSE PLIER

Net .89

## (O) "NITE-LIFE" WORM LURE

This life like worm lure consists of a 3-gang hook harness with 5½" soft plastic worm tied to harness with 15 lb. test nylon. Fluorescent red beads with revolving nickel propeller blade and red plastic lure combine to make this excellent shallow running lure. Size 4 gold plated hooks. Actual Lure Wt., ½ oz. Shpg. wt.,

FT-526 "NITE-LIFE" WORM LURE

(P) "WIGGLY-EEL" NATURAL LURE

A natural soft black plastic eel tied with 15-lb. Test nylon to a 2-gang hook harness. Wire shaft directly attached to eye of front hook with revolving propeller blode located between 2 solid metal beads. Size 2 gold plated hooks. Shpg. wt., 4 oz.

FT-525 "WIGGLY-EEL" NATURAL LURE

Net .49

(Q) 12 SELECTED FANCY POPPERS

A choice selection of hand painted papping bugs for blue gills, bass, trout, pan fish. All proven fish-getters. 4-cork shaped, scaled body, with hackle and tail feathers. 4-cork shaped, frog type with rubber hula skirt. 4-"open-mouthed" with feather streamer, Mooks won't pull out. All an #10 hooks. Regularly cost over 30 cents eacht Shpg. wt., 8 ozs.

FT-529 SELECTED FANCY POPPERS

(R) MONOFILAMENT SPINNING LINE
Limp, DuPont Nylon, "Trigger Fish" manofilament spinning line. Extra strong—quick drying—small dlameter. For open or closed face spinning reels. Choose either 6 lb. or 8 lb. test. 200 yd. lengths. Shpg. wt., 8 ozs.
FT-527—200 yds. 6 lb. Line
Net .69
FT-528—200 yds. 8 lb. Line
Net .79

(5) 400 YDS. NYLON LINE FT-534 Shpg. wt., Net .98

5.95

## **COMBINATION** BAIT-CAST AND FLY-CAST FISHING KIT

- Fine Quality **Split Bamboo Rod**
- Converts from 8 ft. Fly Rod to 5'4" **Casting Rod**

The perfect all-around "Fishermans-Friend." Features a split bamboo rod with interchangeable tips and reversible handle. Chrome plated, screw locking reel seal. Shaped cork handle. Chromed stainless steel guides and extra deep chromed brass ferrules. High gloss lacquered surface-colorful, sealed nylon windings. Kit contains 4 pc. Split bamboo rod, brass swivel, split-shot, line winder, float, nylon line, 12 assorted flies, 2 streamers, 6 hollow point hooks with leaders, leader cutting scissors and fitted wooden case to hold complete kit. Shpg. wt., 3 lbs.

FT-504 Regularly **9.95** Net 5.95



## Beachcomber Tackle Box

Constructed of rigid polyethylene, this rugged box will withstand warping, denting, cracking, breaking and corrosion. Solid brass hardware and nylon latch. Handy cantilever tray prevides for lures and small tackle with ample room in the botton for balt and spincasting reels. Dimensions 12% long x 4% deep x 5% wide. Welghs anly 1% lbs.

Shpa. wt., 21 lb.

Shop, wt., 21 lb.
MC-25 BEACHCOMBER TACKLE BOX
Net 2.05



## **Golf Ranger Finder**

This exciting new Range-Finder is bound to prave an invaluable addition to your Golfing Equipment. Featuring a precision 6X lens capable of measuring from 40 to 250 yards, this handy pocket size instrument enables the golfer by means of a simple facusing adjustment to easily compute the distance to the next hole. Guess work is completely eliminated and choosing the correct club is greatly simplified. Supplied with suede leather carrying case and simple instructions. Shpg. wt., 1/2 lb.

F-427 GOLF RANGE FINOER Net 9.95

## HYDRAULIC PUMP OILER

PERFECT OILER FOR 1001 USES
LIGHTWEIGHT—HANDY—TRANSLUCENT TENITE

A new shap-home-office accessory.

Gives fine, pressurized streom that lubricates hard to get of places.

Seamlers construction of durable tenite. Finger tip plunger, Holds 4 azs. of oil. Lubricates all types of machinery—hand and power tools—appliances—fixtures—tays—conveyonces.

Removable base far easy filling. Drip praof—leak proof design. Outmodes the old fashioned all can. Shpg., wt., 1/2 the street of the street

HO-265



## IMMERSION HEATER

Instant Hearing Full 300 Watts
 Useful in lab-shap-home

Useful In lab-shop-home
Hi-heot immersion coil brings water to a boil in minutes. Heats instantly to a full 300 wotts. Highest efficiency in heoting liquids at all types. Safe—convenient—entirely sheathed and sealed in nickel-ploted brass. Specially shaped tubes provide minimum distance of heat transfer. Excellent for use in narrow containers requiring minimum displacement. Nichrome alloy heating element. Many applications in lob, shop and home. Overall tength 6½", Immersion length 4", coll dia. 1¼", For 115 V. AC or DC. Shpg. wt., 8 oz. Net .98 2 for 1.69.

**AUTO-BOAT** COMPASS

Cars-Boats-Trucks-Tractors



Mounts anywhere on cars-boots-trucks-tractors-motor-cycles. Non-glore, universal mounting bracket. Most easily compensated compass avoilable. Just a twist of the bottom of top knob. Extremely occurate. Canstructed to withstand all driving shocks, Important to the daily driver, involupible for boots and tractors. Large viewing window and figures for ease of reading. Includes mount-ing accessories and instructions. Illuminated model in-cludes both 6 and 12 volt bulbs, Shop, Wt. 1 lb.

F-323 Illuminated Model

Net 3.75


## HEDGE TRIMMER

percentage base ATTACHMENT

Converts ony 1/4" drill into on easy handling hedge-trimmer. Steel and aluminum construction. Sickle-type 10" cutting blode. Simple com action, 3/4" strake. Lightweight . . . easy handling. Shop. wt., 3 lbs.

.Nat 8.29 HD-97.





## "TRIG · A · MATIC" HOSE NOZZLE

Automatic Pistoi Type
 Camplete-Simple One Hand Operation

Latest in garden hose nozales. Precision built pistol type. Four spray action-automatically locks in position. Adjustment for fine variations. Trigger release buttan—for instant, ane finger shut off. Chrome plated and highly polished. Stainless steel springs and neoprene gaskels. Gun sight permits hanging for storage. Shop. Wt.,




......1.95

Multi-Use WRENCH SET 8 Precision

Wrenches

Fully nickel plated-special



## FUNCER CH

1.98

ONLY 99¢

## AIR CONDITIONER FILTER

FOR ANY ROOM AIR CONDITIONER Made OF B.F. GOODRICH "TEXLITE" PERMANENT - WASHABLE

• Free flow design increases efficiency. Fomous Goodrich "Texlite"—thousands of rubberized bustles — give optimum off flow and maximum filtration. Rigid—needs no frame. Retains shape under pressure—will not floke. Trims to fil any roam air conditioner. Shape, wt., % lb.
ML-152 FREE FLOW FILTER Not .99 ea Net ea, in lots of 3 .75

## TRANSPARENT UTILITY BOXES



storing screws, nuts, boits and hundreds of other small parts. With hinged cover and built-in

Stock No.	Dimensions	Compart.	WI.	Each	
M5-51	7"x31/2"x1-3/16"	5	5 Oz.	.41	
	81/4" =41/4" =11/4"	6	7 Oz.	.53	
M5-53	7"x31/2"x1-3/16"	9	5 Oz.	.41	
M5-54	8 1/4" = 4 1/4" = 1 1/4"		7 Oz.	,53	
M5-55	103/4"x6.4x11/4"	1 18	17 Oz.	11.35	



## 2 in 1 EYELET TOOL

1.59 • COMPLETE WITH

Neatly — easily — punches hales and sets eyelets in fabric — canvas — plastic — leather — poper — card board. Does a prafessional looking job every time. Use it on belts, shoes, inneakers, targaulin, luggage, sports equipment, flags, banners, shower curtains. Prevents tearing of materials — actually strengthens them. Mundreds of uses for everyone — everywhere. Complete with 300 assorted eyelets and instructions. Shaps. wt., 1½ lbs.

## **SWING-UP** FLASHER-SPOTLITE

This powerful deam swivel head search light features a swing-up handle red blinker light which sets at any angle within a 90° arc for safety warning and emergencies. Separate blinker and beam switch operates individually or jointly. Perfect for all outdoor activities, road emergencies, home ond farm. Rugged metal cose in red enamel with lustrous chrome swivel head and handle. Uses 6 volt battery or 8-standard flashlight botteries. Shpg. wt., 3 lbs.



## MARINE COMPASS

• Jeweled

Movement • Brass

Gimbal • 2° Graduations

3.29

## BUILD YOUR OWN LAFAYETTE QUALITY

NEW! LAFAYETTE 15-IN-I TRANSISTOR EXPERIMENTERS KIT

A TRULY REMARKABLE VALUE Practical-Educational-Entertaining

## EXCITING PROJECTS BUILD ALL OF THESE



- · ELECTRONIC TIMER RURGLAR ALARM
- 2-STAGE AUDIO AMPLIFIER PHOTO-ELECTRIC RELAY
- CODE PRACTICE OSCILLATOR AUDIO PREAMPLIFIER
- ELECTRONIC FLASHER
  TV COMMERCIAL KILLER
- . RAIN ALARM
- SIGNAL INJECTOR
- INTERCOM
   2-STAGE BROADCAST RECEIVER WIRELESS BROADCASTER
- WIRELESS CODE TRANSMITTER REGENERATIVE RADIO RECEIVER

AN IDEAL LABORATORY KIT WHICH ASSEMBLE THE BASIC COMPONENTS HELPS TEACH YOU HOW TRANSISTORS WORK IN A PRACTICAL WAY. THEN WIRE EACH CLEARLY EX-PLAINED CIRCUIT BY SIMPLY CON-NECTING THE PROPER LEADS.

## THE MOST EXTENSIVE TRANSISTOR LAB KIT IDEAL FOR STUDENT - HOBBYIST - EXPERIMENTER

Lafayette's new 15-in-1 transistor experimenters kit is the most practical introduction to the understanding of the operation of transistors — since it utilizes basic transistor principles and circuitry. Its unexcelled simplicity of construction provides a fascinating and educational program of instruction. You build practical, useful operating transistor devices that teach you transistor fundamentals and anolications.

This versatile kit is supplied complete with transistors, relay, photosell, dual headphones and all necessary items including lead wire, solder. You also receive an easily understood instruction manual which explains just how each of the 15 circuits works. Battery powered, the kit is shockproof and safeideal for beginners. Shpg. wt., 4 lbs.

KT-134A 15-in-1 Transistor Experimenters Kit (Loss bottorios)......Net 14.95

BATTERIES Burgess I or RCA VS034 (8 required)

## NEW!

## **EXCITING "EXPLOR-AIR"** RECEIVER KIT



- 550-1600 Ke broodcost
- Complete bandswitching fram front ponel Built-in Big 4" PM Laud-speaker



KT-135 ' EXPLOR-AIR RECEIVER KIT (Less Cobinet) ...

ML-150 - Leatherette cavered Wooden Cabinet for above

SUPER SPEED TELEGRAPH.

TWO TRANSISTOR POCKET RADIO KIT—KT-98
Contains all KT-97 components plus additional R-C coupled transistor stage for increased sensitivity and output. Complete with instructions. Shpz. wt. 1 lb.
KT-98 —Complete 2 Transistor Kit, less earphone. Net 5.45
MS-111—Crystal earphone for KT-97 and KT-98. Net 1.19
MS-260—Super power dynamic earphone. Net 3.95
BATTERY 1½ V. Burgess #7. Net .08

3 TRANSISTOR SUPERHET POCKET RADIO KIT

A remarkable sensitive, super-selective process are superher receiver with astonishing performance over the complete broadcast band. Uses 2 high-frequency and one audo transistor 2 so-celasty instehed life transformers for maximum power tensifier. The complete broadcast station did Sensitive built-in ferrite antense eliminates need for stational antenna. A designer's dream in attractive among and silver receiver? Complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete with all parts, transistors, case, distractive for the complete for the

MS-368 Sensitive Economy Dynomic Ecophone
Bottery 9 v. RCA VS309

CANNON AM-15-1 Single Headsel BATTERY 11/5 v. Burgess No. 7 (2)

TRANSISTOR CODE PRACTICE OSCILLATOR KIT

For those interested in mostering the international cade, on audio tone oscillator is essential. The circuit of this transistorized feedback oscillator has the simplicity of the near glow, the signal strength of the vacuum tube, and requires only two penite cells for weeks of service. It may be used for weeks of service. It may be used for sola practice, or two may send and receive with the same unit, Kit comes complete with Transistor, Telegraph Key, Resistors, Candensers, Mosanite Board, etc., and Schematic Diagram.

ND 2 TRANSISTOR POCKER
RADIO KITS

ONE TRANSISTOR POCKET RADIO KIT—KT-97

10EAL FOR STUDENTS. HOBBY1STS AND EXPERIMENTERS

PRE-PUNCHED CHASSIS FOR AOVANCEMENT TO 2 TRANSISTOR KIT

Ideal, low-cost translator pocket radio kit

Super-selective ferrite loop antenna permits

Super-selective ferrite loop antenna permits

Roop receiver. Of antenna and good ground,

receiver. Camplete Kit with timple detailed instructions. 36" x 25" x 1". Shpg.

"The complete of the searphones."

AND 2 TRANSISTOR POCKET

. NO EXTERNAL GROUNG



9.95

KEY

Economical and practical code practice key and buzzer unit for learning code.

Telegraph key chrome and nickel plated

Telegraph key chrome and nickel plated

The high frequency buzzer has frequency adjustment with the high frequency buzzer has frequency adjustment with token to keep tone constant. Screw type pin jack terminals lacknut to keep tone constant. Screw type pin jack terminals lacknut to keep tone constant. Screw type pin jack terminals lacknut to keep tone constant. Works with inexpensive 11½ not to the property of the prope

## SUPER-SENSITIVE PHOTOCELL ELECTRONIC RELAY KIT . WITH CLAIREX CADMIUM SULPHIDE





PHOTOCELL

. ADJUSTABLE SUPER SENSITIVITY-WORKS WITH JUST A FLASHLIGHT AT 250 FEET!

. NEEDS NO SPECIAL HIGH-INTENSITY LIGHTS

. INSTANTANEOUS OR SUSTAINED OP-**ERATION ON THE FLIP OF A SWITCH!** 

Lolayette's latest achievement in a super-sensitive photocell relay kit. Ideal for sustained operation required for burglar olarms, door buzzers, for turning an parch and home lights at night to discourage prowless when away in the evening. Excellent for instantaneous an-off operation required for counters, packaging, door opening, mater activation and countless industrial applications. A flip of the switch converts unit from instantaneous "on-off" to sustained "on" operation. A simple push on the "RESET" switch apens the externol circuit and turns off the alorm. The unit apertors on 110 volts AC and incorporates the efficient 5823 cold cathode tube, permitting longer life since there are no filaments to burn out. The controlled circuit is plugged into a convenient 110V AC output socket. A simple change in wiring (in instructions), as well as convenient input terminals, enable you to supply the external circuit with any desired voltage. Relay centacts roled at 3 amps permitting up to 300 waits external load on 110 Valts AC. Complete with all parts, photocell, tube, chassis, sitk-screened metal cobinet and easy-to-follow illustroled instructions. Size: 3" x 4" x 5". Shpg. wt., 3 lbs. Kt.-133—Kit, Complete

ALL LAFAYETTE KITS ARE SUPPLIED WITH EASY-TO-FOLLOW INSTRUCTIONS

## NEW! LAFAYETTE STEREO PHONO AMPLIFIER KIT



- GANGED TONE CONTROLS
- STEREO-MONAURAL SWITCH
- .04 VOLT SENSITIVITY
- . 4 WATTS STEREO OUTPUT
- . ISOLATION TRANSFORMER
- . SEPARATE VOLUME CONTROLS

This is a complete 4-wort hi-fi stereo amplifier having 2 walts output per channel, Features separate valume control for each channel; ganged tone controls; Stereo-manaural switch to feed one channel to both speakers and to reverse the channels. Just right for any use where a small stereo amplifier is required—ideal for custom mounting in even the tightest-locations; specially designed for small apartment sized stereo

systems.

An Isolation transformer makes this circuit extra sole. Other circuit features for better performance include application of negative feedback to driver and output stages for wide-range response and extra law distortion. Dual-triode 12AX7 tubes function as voltage amplifier and driver, providing very high gain. 40 millivalts drives this unit to full output. This tremendous gain, plus an extremely high input impedance, make this amplifier perform exceptionally well with all types of ceromic and crystol pickups, as well as tuners, tape recorders, etc. Selenium rectifier power supply has extremely good regulation, Lagical layaut, high quality ports, plus complete instructions for assembly, make this kit a locasure to build and use. For 3.2 or 8 ohm speakers. Tubes: 2-50C5, 2-12AX7 plus selenium rectifier. Size: 9½" x 5" x 4½". Complete with all parts. For 110-120 valts, 60 cycle AC. Shpg. wt., 7 lbs, KT-126-Kit, Complete

BATTERY Burgess 2 .... MS-369 Stethoscope Headset

CODE PRACTICE SET

## NEW! LAFAYETTE "BRASS-POUNDER'S" KEY



With Ball-Bearing Pivats
 Salid Palished-Brass Bate
 A better quality precision-made key designed for hard usage. Polished brass bate; spring tension and contact clearance adjustments; 3/16" silver contacts. Bate 3" x 2"; overall size 5" long x 2½" wide x 1-1/16" high. Shpg. wt., 1½ lbs.

MS-428 Telegraph Key

Met 1.95

## SAVE ON NEW TELEGRAPH KEY



Ecanomical and practical cade practice key. Solid, heavily chrome and nickel ploted metal parts, molded nickel phenolic base. Adjustable cantoct clearance, sian and adjustable cantoct clearance, sian and adjustable cantoct clearance. Area buyl Bate 3½ million parts, leading 1,2 million parts, lea

## NEW! high frequency CODE PRACTICE BUZZER



Reg. Value 2.50
Adjustable frequency buzzer ideal for Individual or group code practice. Black molded phenolic hausing — Works with 1½ volt battery. Screwadjustment for changing tone. 1½ diam. x ]-1/16" high. Shpg. wt., 6.028. 6 ozt. MS-436 Buzzer



## COMPLETE STEREO PHONO SYSTEM KIT

- . ASSEMBLE THE STEREO AMPLIFIER AND SAVE REAL MONEY
- · PLAYS STEREO AND MONAURAL RECORDS

74-53

REGULAR ONLY 59.95

Enjoy fine sterea perfarmance with this "easy-ta-assemble" exclusive Lafayette package. The complete system cansists of Lafayette KT-126 basic stereo phano amplifier kit, the renowned Collara T5C-040 4-speed automatic record changer, the new Ronette "OV" Turnover Stereo cartridge with dual sopphire styli for stereo and manaural records, and two Lafayette 5K-109 Miniature Mi-Fi separate valume cantral, "stereo reversal-manaural aperation" switch, and isolation transfarmer teliminate shock hozard. The 4" x 6" 5 wolt speakers are housed in beautiful mahagany wood cabinets, work from either 4 or 8 ohm autputs and are supplied with 25 ft. of cable far hookup. You save 16.58 over regular satalog prices!

work from either 4 or 8 ohm outputs and are supplied with 23 it. of cools over regular catalog prices!

Net 59.95

KT-126 Stereo Anno Kit System

KT-126 Stereo Amplifier Kit Only. Complete with all tubes, parts and instructions. Shpg. wt., 7 lbs.

Net 18.95

The KT-126 Stereo Amplifier Kit and Ronette "OV" Sterea Turnaver Cartridge with dual sopphire
KT-136

## LAST MINUTE RELEASES and SPECIAL VALUES

## **GONSET 2-WAY RADIO**



No exam required . . . no code. U.S. Citizens required only to complete simple F.C.C. form

For prsonal use, business or pleasure

Simple to operate—na technical knawledge required
Wide range radio...not confined to line-of-sight transmission

Compact...lightweight
rugged—can be used anywhere

A complete 2-way voice transmitter-receiver and power supply in a single compact unit aperating on the 27 MC Citizens Bond. Crystal controlled for highest stability—no fussy tuning—no drifting aff channel frequency. Simple press-ta-talk feature on microphone leaves one hand free while using set. Speaker is built into front panel—incoming calls easily heard some distance from set. Full 3-wottensmitter (maximum allowable) for maximum range. Other features include an adjustable "squelch" control for muted standby operation and tuning indicator an front panel for visual check of proper transmitter aperation. Foolproaf, lightweight, dependable, this new citizens radio has hundreds of uses—booting, hunting, fishing, emergency communications, construction crews, surveyors etc. Complete unit measures only 5½" M x 6¾" W x 6¾" D. Shpg. Wt., bs. Three models availables 12 Valts DC only; 6 Valts DC only; 115 Valts AC onty.

MODEL 3303. Camplete with microphone and transmit-ter/receiver crystals for one channel. Less antenna. For 115 Volts AC. Net 124.50 MODEL 3304. Same as above, but for 12 volts DC aperation
MODEL 3305. Same as above, but for 6 valts DC opNet 124.50

## ANTENNAS FOR GONSET 2-WAY RADIO

Highest quality antennos, ruggedly built for use in varied climatic conditions. For bose station or mobile service Mobile antenno—Cail looded whip antenno—Model 329

Ground Plane Base Station Antenno-Complete with 50 ft. of transmission line, hordware and ready for installation—Model 3296

Beom Antenno—Directional 3-element beam. Ready for installation—Model 3302

Net 39.95

Net 39.95



## KIT OF 20 INSULATED **ALLIGATOR** CLIPS

Two kits of insulated alligator clips. Kit A consists of 20 large size clips, kit B consists of 20 small size clips. All have sturdy nickel-plated laws with strong spring and hard bite. Each kit contains 10 red and 10 black alligator

MS-569 Kit B (small size) MS-570 Kit A (large size)



## KIT OF 10 5-WAY **BINDING POSTS**

- FOR BANANA PLUG FOR PHONE TIP PLUG
- FOR SPADE LUG FOR ALLIGATOR CLIP
- . FOR STRAND OF WIRE











## BATTERIES FOR PORTABLE RADIO RECEIVERS

Burges	RCA	Replaces		Shpg. w	1.
Type	Type	Everendy	Volts	lbs.	Net. Ea.
1	VSO3SA	935	11/2	4 oz.	.13
20	V5069	720	1 1/4	%	.69
20	V\$141	W353	11/4	11/4	.77
28	V5036A	950	1 1/2	6 oz.	.13
41	V5004	742	1%	2 -	1.15
88	V5070	9607	11/2	8 oz.	.46
218	V\$236	964	1 1/2	3/4	.28
37	_	_	1 1/2	1	.65
Z	V5034A	915	1%	4 oz.	.08
03	V\$072	726	41/2	1%	.76
F3	V\$067	736	41/2	2	.82
G3	V5002	746	41/2	2	.85
284	V\$010	718	6	31/2	2.73
F4P1	V\$009	744	6	21/2	1.04
Z4	V5068	724	6	1/2	.63
85	VS129	713	71/2	1 1/4	1.26
CS	V\$065	717	7%	11/4	1.05
		ble "8"	Batteri		
					101
UIS	V5084	412	22 1/3	4 oz.	1.05
A30	V5014	W359	45	21/2	
830	VS012	484	45	31/4	2.98
M30	V5013	482	45	3 1/4	1.75
U30	V5086	415	45 45	11/4	1.92
XX30	V5055	455 738	45	2	2.76
Z30	V\$015	457	671/2	1	2.21
K45	V\$082	477	671/1	11/4	2.17
P45	V5218		671/2	1 1/2	2.75
P45M	V5215-216 V5318	416	671/6	1/2	2.07
UX45 XX45	V5016	467	67%	1 1/2	2.45
XXSO	V\$217	437	75	1 1/4	3.15
N60	V5090	490	90	2	3.15
NAOX	V5316	495	90	11/4	3.15
P60	V5219	479	90	1%	2.77
XX69	73217	W361	1031/	2	4.60
U200	V5093	493	300	2	7.70
0200					
	Portabl		d "B"	Packs	
2TXX4		W370	11/2-60	2	4.11
41Z60	V5064	729	1%-90	43/4	4.03
DAATA	V5054	WIAO	114.00	514	5.48

U 200	V5093	493	300	2	7.70
	Portable	"A"	and "8"	Packs	
2TXX40	_	W370	11/2-60	2	4.11
4TZ60	V5064	729	116-90	43/4	4.03
6TA60	V5054	W369	11/2-90	5%	5.48
17GD60	V5022	759	11/2-90	21	7.21
TSE50	V5050	755	6.71/2.75	41/2	4.55
TSESOP	V\$060	785	71/1-75	41/5	4.83
F6A60	V5019	753	7%-9-90	7	5.43
G6M60	-	754	71/2-9-90	7	5.95
TOZ 60	V5057W	756	7%-9-90	51/2	4.87
F6A60P	V5058	757	9-90	7	5.08
G6860	VS047	752	9-90	8	5.78
TAZ SOP	V5059	727	9-90	51/2	4.80
	Flashlight	& La	ntern Bat	teries "	

	riusningni	er route	th po	LELIAR	
1	V5035A	935	1%	3 or.	1
2R	V5036A	950	11/2	7 oz.	1
6	V50065	6 IGN	11/6	2	.1
7	V5074	912	11/2	1 02.	.0
N	V\$073	W468	1 1/6	l oz.	.0
Z	V\$034A	915	11/2	2 oz.	.0
4F2H	V5138	W357	3	31/2	1.4
F4H	V5040C	509	6	21/1	.7
F4SC	-	510F	6	1%	.7
TWI	V\$317	731	6	31/2	1.4
4F4H	V5 103	706	6	71/4	3.1
475H	V5139	715	71/2	81/3	4.3
476H	V\$140	716	9	10	5.0
		STATE OF TAXABLE PARTY.		the same of	

## TRANSISTOR AND HEARING AID BATTERIES BURGESS RCA REPLACES

	TYPE	TYPE	EVEREADY	VOLTS	WT. N	ET EA.
	NE	V5073	W468	1.5	1 oz.	.08
	A4	_	-	1.5	2 oz.	.69
	4D4	_	274	6	3 lbs.	3.05
	2N6	V5305	246	9	1 lb.	1.30
	206	V5323	216	9	3 oz .	.95
	223	V5324	243	41/2	% oz.	1.11
	COX	_	2356	9	2 lbs.	1,10
	05	V5315	707	71/0	1 lb.	1.05
	D6	V\$306	276	9	1 1/2 lbs.	1.26
	DOPT	V5301	2506	3.6.9	2 lbs.	1.58
	Des		2761	9	1%	1.05
	M6	V5322	266	9	2/5	1.05
ı	P6	_	226	9	3 or.	.77
ļ	XX9	V5304	239	9-13.5	4 oz.	.95
l	K10	V5083	417	15	4 oz.	1.16
١	U10	V\$083	411	15	2 oz.	.81
ĺ	Y10	-	504	15	2 oz.	.81
ı	K15		420	22.5	4 oz.	1.23
ı	U15	V5084	412	22.5	3 oz.	1.05
ı	Y15	-	505	22.5	2 oz.	1.05
ı	K20	V5085	430	30	6 oz.	1.51
ı	U20	A2082	413	30	2 oz.	1.23
ı	Y 20	_	506	30	2 oz.	1.30
ı	¥205		507	30	2 oz.	1.30
l	-	V5313	E9	1.4	3 oz.	1,80
l		V\$400	E233 E146	9	6 oz. 2 oz.	1.58
I	POM	V\$312 V\$300A		9	5 oz.	.95
ŀ	POM	V\$300A		9	2 oz.	1.53
۱	130	V\$335	635	11/4	3 oz.	.16
ı	230	V\$336	A100	1%	6 oz.	.16
١	930	V5334	1015E	11/2	4 oz.	.13
		V5321	2731	4%	3 lbs.	1,93
ı	-	73321	4731	7/1	0 105.	

## MALLORY MERCURY BATTERIES FOR TRANSISTOR & RADIO APPLICATIONS

					Shpg.		51d.
Type	Volts	Cap. MAH	Mox. Orain		Wt.	Singly Eo.	Pkg. Ea.
TR 15 2R	2.5	400	40	2	2 oz.	.79	.72
TR132R	2.5	1000	100	2	3 oz.	.92	.84
TR133R	4.0	1000	100	2	3 oz.	1.30	1.18
TR 233R	4.0	2200	60	1	9 oz.	1.80	1.80
TRIASE	6.5	500	50	2	3 az.	1.80	1.64
TR1468	9.0	400	40	1	3 oz.	1.58	1.58
RMIR	1.34	1000	100	4	3 oz.	.42	.38
RM12R	1.34	3600	250	2	3 01.	.90	.82
RM400R	1.34	80	10	5	1 oz.	.28	.25
RM401R	1.34	800	100	2	2 oz.	.37	.34
RM502R	1.34	2400	200	2	3 01.	.68	.62
RM601R	1.34	1800	150	2	3 oz.	.56	.51
R89625R	1.34	250	20	4	1 oz.	.33	.30
RM630R	1.34	350	20	4	1 ox.	.33	.30
ZM9	1.5	2400	200	2	5 02.	.56	.51
0M-9N	1.5	2400	200	2	5 oz.	.59	.54

## BATTERIES FOR PORTABLE RECORDERS

1	MFR.	TYPE	VOLTS	SHPG. WT.	NET
Bu	rgess	2×7	10%	1/2 1b.	1.82
	rgess	2X62X	11/0-9	% lb.	1.82
Bu	rgess	3XX7	10%	%	2.00
M	ollory	302478-M	9.0	9	3.75

## LAFAYETTE STEREOPHONIC **PHONOGRAPH**



## FLEXICONE KIT



REDUCES SPEAKER CONE RESONANCE IMPROVES FREQUENCY RESPONSE


Thoroughly tested and approved, Flexicone will improve your speaker sound quality and frequency response by softening the outer edges of the speaker cone thereby reducing the cone resonance from 10 to 40 cps. Easily opplied in just 15 minutes. One three-bottle kit contains enough material for four 8" speakers. Complete with instructions.



An obsolutely essential addition for every Mi-FI enthusiast. Record, cartridge and needle life will be greatly extended by the use of this tane arm control. Accurately and smoothly places tone arm in record run-in groove and lifts arm off record at end of play. Ideal for "cueing." Designed to fit practically every known turntable arm supplied with adhesive mounting base which eliminates drilling mounting hales.

M5-572 TONE ARM CONTROL

## FLEXIBLE AUDIO "Y" CONNECTORS



or converting Stereo Player to Monaural. Can be used for

(A) Phono Plug connected to 2 Phono Jacks by 4" shielded

SWITCHCRAFT 330FI

SWITCH CRAFT 330F2 Net 1.18
(C) 3 Phano Plugs connected tagether by 4" shielded

SWITCHCRAFT 330F3

## SHIELDED "Y" ADAPTERS



Completely shielded Y-Adopters with choice of cannectars

(D) Two phono jocks in parallel to RCA type phono plug.
MS-596 Not .69

(E) Three RCA type phona jacks in parallel. M5-597

(F) Two RCA type phono jacks in parallel to a standard

## "MINI-MIX" SWITCHCRAFT AUDIO MIXER



Miniature 2-input h1-impedance mike and phono mixers. Separate gain controls for mixing. Shielded hausing. Ideal for use with tope recorders, musical instruments, phono graphs, microphones. Size 2-1/6" x 1-13/16" x 1-1/16". 310-Phane jock inputs and phone plug output. Net 4.67 8266—Cable assembly with plug and jack to use No. 310 where equipment jack is recessed....Net 2.20 315—Phane jock inputs and micraphone connector


No. 310 where equipment to the second second

15—For recorders or amps using Janes connectors including recessed type in Webcar Tape Recorders Net

A complete portable and compact sterea phonograph in one convenient case. System uses the well-knawn Garrard RC-121/11 4-speed stereo changer which features true intermix of 12" and 10" records in any arder with instant selection of either automatic or full monual operation. Uses a stereo turnover cartridge to play all your records—whether monoural or stereo. Two powerful 10 watt amplifiers pravide a frequency response of 50 to 12,000 cps. Contrals included: Master Volume: Remote speaker volume; Master treble; Master Bass. Detachable front speaker cabinet houses a 6" x 9" speaker with 19 ft. extension cord. Main unit houses two speakers—one 6" x 9" woofer and one 4" tweeter. Phanograph has easy-grip handle on attractive smart-looking Pyroxylin covered case. Size: 18%" long, 15% "wide, 9" high. Shap, wt., 36% lbs.
PM-128 Complete Sterea phonograph with remote speaker.

## SENSITIVE MINIATURE

## RELAY \$2.95 ea.



Extremely small, bensitive relay — weighs only ½ azl Double-pole double-throw, with silver and silver-gold-platinum allay contacts. Contacts handle up to 100 volts at 300 mm (30 watts). Coil measures 5300 ohms decresistance-rated at 4.1 mo. dc. pull-in current, 0.95 mo. dc. drap-out. Enclosed in transporent plastic dust cover, Operating time 2-8 millisess; release time about 1.5 msets. Breakdown valtage ratings: coil to frame, 500V. sontacts to frome 350V. Measures 1-1/16" x 11/16" x ½". Ideal for model control, photocell relay, carrier-current control and dozens of other miniature applications. Shaps, wt., 4 az.

Shops, wt., 4 oz.

P-332—DPDT Miniature DC Reloy
As above, but 4-pole double throw; pull-in current 6.3 mo. dc.; drop-out 3.3 mo. dc. Weighs ½ oz. %" x 1½"
x 1½", Shops, wt., 4 oz.

F-333—4P-DT Miniature Reloy
Net 3.95


## **SWITCHCRAFT** STEREO AUDIO CABLES



Two shielded insulated cobles, (af different color tones, for easy identification of channels) inside a common chrome grey plastic facket, providing two completely isolated

TYPE	LENGTH		NET
25FF25 25FK25 25FN25	36" 6' 10	Phono Plugs of all ends.	1.91 2.20 2.65
25FF84 25FK84 25FN84	36" 6' 10'	2 Phono Plugs of one end, other ends Stripped and Tinned	1.71 1.91 2.20

## SWITCHCRAFT AUDIO CONNECTORS AND ADAPTERS



(G) MULTIPLE SELECTOR CONTROL completely shielded. Complete with mounting hardware: SWITCHCRAFT 664 Net 2.91

(H) STEREO-MONAURAL SELECTOR
Provides instant switching from monourol to Stereo. Two
Phono Jox input and two Phono Jox output. Attractive ton
housing is completely shielded and may be mounted on
cabinet. Supplied with mounting screws.
SWITCHCRAFT 661 Net 1.76

(I) STEREO-MONAURAL SELECTOR WITH REVERSE Same as Switchcraft 661 but with channel reverse feature.

SWITCHCRAFT 662 Net 2.06

(J) SPEAKER PHASE CONTROL
Correct speaker phasing is essential in multiple or Stereo
Speaker installations. This completely shielded control is
ideal for this application. Attractively finished in tan with
easy to use screw terminals. Supplied with mounting hard-

SWITCHCRAFT 665

## Save 331/3 to 50% on MINIATURE-TRANSISTOR & R/C Equipment

## NEW! Lafayette's SUPER-TROL R/C EQUIPMENT



(A) RADIO CONTROL TRANSMITTER: Assembled-tested-guaranteed. No license examination required for operation. Crystal controlled for stability and to meet F.C.C. regulations. Uses powerful 3A5 tube for range of approximately one mile. Will operate any 27.255 me R/C receiver. Overall dimensions only 8½ x 2¾ x 1¾ // \_ just a handful! Includes antenna – tube – crystal – and instructions. Less Batonly 81/2" x 21/4" x 11/4" -teries. Shpg. wt., 21/2 lbs.

Batteries required: Burgess U30 (3 needed) (B) RADIO CONTROL RECEIVER: Completely wired and tested receiver - extremely sensitive

and stable. Completely enclosed—ideal in boats—or case may be removed if desired. Ingeniously constructed to withstand vibration and shock. Features external fine tuning—antenna "snap" lead—plug for power and actuator connections. Ideal Companion for F-249 Transmitter and F-327 Servo shown elsewhere on this page. Requires one 1.5V battery and one 67.5 Volt battery. Size determined by use. Measures only 3" x 2¾" x 1½". Complete with tube and instructions. Less batteries. Shpg. wt., 8 oz.

F-208 Batteries required: Burgess UX45 (1 needed) 2.07 ea. Burgess No. 2 (1 needed)

SPECIAL COMBINATION OFFER

Net 22.90 Consists of R/C Transmitter (F-249), and R/C Receiver (F-208) F-259 — Combination



"JEWEL" REMOTE CONTROL RELAY

A natural for remote control receivers, it is highly sensitive, and built to withstand severe croshes. The smallest commercial job available, it weight less than ½ oz. Foctory adjusted to pult in at 1.4 MA. drop out at 1.2 MA D.C. Single pole, double throw. Used in outstanding R/C receivers. 5,000 ahm cail. IMPORTED TO SAVE YOU MONEY.

## 27.255 R/C CRYSTAL



Reg. 2.95

Specially manufactured for Lafayette. Designed specifically for use in R/C model planes, boats, cars, etc. Low-drift — high autout — dependable frequency control. Talerance .04%, 13/16" wide x 7/16" deep x 1 1/8" high above pins. Pins on 1/2"

MS-446



MATCHING CRYSTAL SOCKET:

## miniature TELESCOPING



## LAFAYETTE PNP AUDIO TRANSISTOR

SPECIAL! 59¢

General audio type PNP transister for experimenters and hobbytsts, for code practice ascillators and similar small signal devices. In new JETC 30 welded case.

SP-146

Net, singly, each 59¢ 10 for 4.50, 50 for 19.50, 100 for 37.00

## **NEW! MOTOROLA** 2N554 POPULAR LOW COST

AUDIO POWER TRANSISTOR 125



- 40 WATT COLLECTOR DISSIPATION\*
- 2 WATT CLASS A OUTPUT+

FREE with each 2N554 New Motorola Circuit Applications folder on HOW TO BUILD A TRAN-SISTORIZED AUDIO POWER AMPLIFIER, Power Control, Battery Charger, Model Power Supply, Model Train Control, Toy Electronic Organ, Geiger Counter and DC to DC Converter.

\* With Heat Sink

MK-10 Power transistar mounting kit with teflor coated fiberglass insulating washer. Net .25 mK-15 Same as above, but with mica insutating washer.
Net -25

MK-20 As above, but with anadized aluminum insulating

## NEW! MULTI-PURPOSE ELECTRIC SERVO MECHANISM

- POWERFUL, MOTOR DRIVEN R/C ACTUATOR
- POSITIVE, INSTANTANEOUS ACTION

. FOR MODEL BOATS AND CARS

Lafayette's new, motor driven, remate cantrol servo-mechanism. Imported by Lafayette to sell for half the price of any camparable until Carefully constructed for power, durability and rugged use. Operates with any single channel, remote control receiver and transmitter. When operated at the prescribed 3 valts, the action is accurate and rapid. Provides for selective steering and automatric return to neutral. Extremely efficient when used with model boots or land vehicles. Hobbyists will find uses for the servo-mechanism restricted only by their imagination. Single pulse aperation—electronic neutralization. Measures only  $2\frac{1}{2}$  x 2" x  $1\frac{1}{2}$ " averall. Includes instructions and linkage to extend octuator arm. Shpg. wt., 8 azs.

## REMOTE CONTROL ESCAPEMENT . AT THE LOWEST PRICE ANYWHERE!

A sturdy 2 arm self-neutralizing escapement. Completely wired [nat a kit). Converts electrical impulses from remote control receiver to mechanical motion for varying mavement of plane, boat, or car. Four 90° rotations—two by armsture activation, two by neutralization. Has ratchet governor for maintaining foolproof rotating speed. Weighs only 7/8 az. Size: 1-3/8" L x 2" W overall. Shpg. wt., 5 az.

## FOR SILENT RADIO AND TV LISTENING. FOR SILENT RADIO AND TV LISTENING. A sensitive all-purpose earphane designed with both your listening pleasure and pocketbook in mind. Extensive range and excellent tone cambine, to provide excellent reproduction. Lightweight, equipped with a practically Invisible ear support, that slips comfortably over either ear, from which the earphane can't slip out or fall. Ideal for use with TV and radio sets, amplifiers, miniature and transistor receivers, etc. Attractive unit with shiny chrome finish. Complete with a 3 ft. card. A super value at this price. Shpg. wt., 5 oz. MS-365 à ohm impedance, with phone tip plugs. For silent radio or TV listening Net 1.15 MS-366 à ohm impedance with subminioture phone

REMOTE ENGINE CONTROL ESCAPEMENT Lafayette's exciting new air-bleed self-neutralizing remote engine control. Varies engine speed of your model. Neutral position of one arm is low speed, neutral position of 2nd arm is high speed, and maintained activated position of either arm (armature airvated) stops mater. Perfect mate far Lafayette F-256. Compact and weighs only 3/4 oz. Requires 1-1/2 volt battery. Low current drain. Size: 1-5/8" x 1" x 3/4". Shape. wt., 5 oz.

## COMPOUND REMOTE CONTROL ESCAPEMENT

· LAFAYETTE'S AMAZING VALUE IN A 4-ARM SELF-NEUTRALIZING COMPOUND ESCAPEMENT!

. NO NEED TO WORRY ABOUT LOSING YOUR MODEL!

Yau have no sequence of operation to warry about! Simple as A B CI One pulse always gives right turn; two pulses always gives left turn. Three pulses closes the circuit for the supplementary control such as motor [F-257] or elevator, if used. The rudder always rurns to neutral position after any turn as soon as transmitter keying button is released. With ratchel governor for foolproof operation. Sturdy construction—low current drain. Uses 1-1/2 volt battery. Weighs 1-1/8 az. Sizes 2-7/8" L x 1-9/16" overall. Shpg. wt., 6 az. F-256.

## **POWER TRANSISTORS**



Reg. Value 1.35

## EACH UNIT FACTORY TESTED TO MEET SPECIFICATIONS

EQUIVALENT TO:

CBS 2N256 SYLVANIA 2N307

MOTOROLA 2N554

SP-147 Power Transistor

## GENERAL PURPOSE DIODES



10 for 2.59

## **EXCELLENT DETECTOR FOR** TRANSISTOR AND VACUUM TUBE RADIO RECEIVERS EQUIVALENT TO:

1N34 1N34A

1N38A 1N48 1N56 1N69

SP-148 General Purpose Diode Net .29 each

10 for 2.59

NEW! LAFAYETTE 27.255 MC CITIZEN BAND REMOTE CONTROL TRANSMITTER KIT KT-127

WAY OVER 1 MILE LINE OF SIGHT TRANSMISSION!

Once again Lafayette spurts into the lead with its new amazing RC CITIZENS BAND TRANSMITTER. You'll marvel at the neatness and simplicity af its layout and at the dependability af its crystal contralled circuit. Fits comfartably in the polm af your hand—yet is so stable that it is unaffected by hand capacitance ar median. Has new attractive wide-scale meter for visually tuning transmitter far aptimum foolproof perfarmance. Has wide, nan-critical tuning. Uses ane B & W prewaund coll—no tedious winding of calls! Tuning far maximum output and antenna loading adjustment easily performed from exteriar of cabinet. Camplete with approved lelescoping antenna, meter, cabinet, chassis, tube, crystal, alignment toal, all parts and easy step-by-step instructions. FCC farms for exam-free permit enclosed with kit. Size 10" x 4" x 2½". Shpg. wt.

KT-127, Less Botteries ...

1 Burgess No. 2 (RCA VS036) Battery

2 Burgess P45 (RCA VS218) Battery @ 2.17

DYNAMIC EARPHONES

FOR TRANSISTOR AND SUBMINIATURE

MS-366 6 ohm impedance with subminioture phone plug and matching phone jack Net 1.19
MS-368 2000 ahm impedance with subminioture phone lack Net 1.05

Finest quality XXXP bakelite base, capper clad boards

PLASTIC CASE FOR MINIATURE

Reautiful pocket sized modern streamlined case with rounded corners and
removable snap-on coser. This is an
ideal case for that translatorized receiver—or other utinisture or subminiature preamplifier, amplifier, oscillator
or transmitter. Two pre-drilled apertures, a 2½" daimeter opening ideal
for volume control and switch. In addition, there are two small
openings on the side for such internal leads as antenna or earplione. Experimenters, builders and hobbyists will want to stock
up on several of these cases at this low bargain price. Size:
4½" x 2½" x 1½". Shpg. wt., 6 oz.

Net 95c.

for printed circuit work.

COPPER CLAD LAMINATE AT

> LAFAYETTE'S LOW PRICES!

Net 15.95

Net .13

Net 4.34

SUPER STABILITY FOR FOOLPROOF CONTROL OF MODEL PLANES, BOATS AND CARS.



NEW! Lafayette Super-Value Sun Battery
QUANTITY LIMITED!

Sensational buy enables Lafayette
to affer this famous selenium
photocell at a small fraction of lis
normal pricel Approx. 8 MA current autput al 100 ft. candles with
55 ohms load! .5 volts apen circuit
voltage in av. sunlight. 30 MW power autput
at 100 ft. candles with 1000 ohm load! Truly
a super buy for the experimenter, kit builder,
etc. With colored pigtall leads. 1/3" diam.
MS-543

Net 1.47

## TRANSISTOR OUTPUT TRANSFORMER



Only %" x %" x 1-1/16". 2000 ohm primary to 10 ohm voice coil. Matches most transistor outputs. Shpg. wt., 8 ozs.


TR-93 ..... Net 694

## SUPER MICRO-MOTORS

- . HALF THE WEIGHT-TWICE THE POWER!
- HIGHER SPEED-LOWER DRAIN!
- . PERMANENTLY LUBRICATED!
- DOUBLE PERMANENT FERRITE MAGNETS!

Expertly uesigned, miniature, D.C. permanent magnet mators. Ruggedized construction for industrial use. Highest power and speed to weight ratio of any miniature mator makes these a "natural" for models and remote control applications. Ferrite magnets preclude possibility of demagnetization and offer minimom weight. Unique, precisian formed device permanently centers commutator in precise position. Utilizes phosphor-bronze brushes and brass sleeve bearings. May be mounted by means of mator mount supplied or by means of tapped hale in mator case. Avg. Shpg. wt., 4 oz. Complete with leads. Shaft diameter 3/32"

Stock No.	Ronge	Drain Ma.	RPM	н.	w.	1.	Wt.	EA.	LOTS 3 EA.
F-403 F-404 F-405	1.5-4.5 3-6 1.2-16	200-300 250-300 90-140	5000-6000 6000- <b>7</b> 000 8000-9000	11/4"	1 1/6" 1 3/6" 1 3/6"	13/4"	1 1/4 or. 2 1/4 or. 2 1/4 or. 2 1/4 or.	.69 1.10 1.39	.62 .98 1.25





AR-503

## NEW POWER TRANSISTOR AUDIO TRANSFORMERS . DESIGNED FOR HIGH OUTPUT TRANSISTORS

. USED IN AUTO RADIOS - PA SYSTEMS -INTERCOMS — ETC.
OUTPUT TRANSFORMER

Rated 6 watts. Frequency response 70 to 20,000 cycles 4 2 db. Primary impedance, 48 offms center tapped. Secondary, 3.2 offms. Primary DC resistance 1.1 offms, secondary 0.3 offms. Unbalanced primary current 500 ma DC. Size 1-9/16" x 11/2" x 1-9/16" Shpg. wt., 1 lb.

Roted 2 walts. Frequency response 70 to 20,000 cps  $\pm$  2 db. Primary impedance 100 ohms. Secondary Impedance 200 ohms CT. Primary DC resistance 1.8 ohms, secondary 2.7 ohms. Unbalanced primary current, 200 ma DC. Size 1.9/16" x 11/8" x 1.9/16". Shgg. wt., 1 lb.



## NEW! UNIVERSAL POWER TRANSISTOR OUTPUT TRANSFORMER

. DESIGNED FOR THE EXPERIMENTER

• PRI. TAPPED AT 8-12-16-24-32 AND 48 OHMS

. RATED 10 WATTS

tofayette's latest transistor circuit component. Engineered for construction projects using the increasingly popular power transistars. Will also serve as a general replacement for many transistarized auto radios. Roted at 10 worts for push-pull aperation, Primary topped at 8, 12, 16, 24, 32 and 48 ohms. Secondary topped at 4, 8 and 16 ohms. Sizes 3-1/16" x 2½" x 2-9/16". Shpp. wt., 3 lbs.

## SERVICEMEN AND DEALERS! LOOK AT THESE PRICES!

LAFAYETTE WIRED TEST EQUIPMENT SENSATIONAL VALUES AT LESS THAN THE PRICE OF KITS!


## TV-FM SWEEP-MARKER-ALIGNMENT GENERATOR

SWEEP RANGE 3MC-260 MC MARKER RANGE 3MC-225MC CRYSTAL CALIBRATION OF BOTH SWEEP AND MARKER COMBINATION CRYSTAL AND VARIABLE MARKER—1 % ACCURATE!

COMBINATION CRYSTAL AND VARIABLE MARKER—1% ACCURATE!

A precision instrument that incorporates in a single unit both TV-FM sweep and crystal marker generators with all the features required for accurate alignment of IF and RF stages of TV and FM receivers. Covers 3MC-260MC in 2 bonds. Sweep width is continuously variable fram 0-12MC or, more. 3 volts RMS, 60 cycle sine wave hardsontal sweep valtage avoidable from front ponel. The marker covers 3MC-225MC in 4 overlipping ranges. Marker calibration is accurate to better than 1%. The 4.5MC crystal supplied mounts on front panel socket and is accurate to 0.002%. RF output is ever 100,000 microvalts and is controlled by the 3 step (XI, XIO, XIO0) attenuation and the continuously variable fine adjustment control. Output impedance is 75 ohms, unbalanced. Controls are sweep width, horizontal phase, electronic retrace blanking with off position, marker amplifier, RF output 3 step multiplier, RF output fine adjustment, sweep range selector switch and marker range selector switch. Crystal socket, pilot light and external marker input are also an front panel. Other features include two 5" easy-to-read diets and vernier driven dial pointers. Sturdy gray wrinkle metal cobinet. Convenient handle. Size 9" x 13½" x 6". Shpg. wt., 20 lbs.

Net 79.50 MODEL LSG-50



Factory Wired and Tested



HIGH SENSITIVITY MULTITESTER

LOOK AT THESE FULL SCALE RANGES!

FULL SCALE RANGES!
P.C. Volts: 0-6; 0-30; 0.
120; 0-600; 0-1200; 0-6000
0-1200; 0-600; 0-1200; 0-6000
0-1200 Volts — RESIS-TANCE: 0-100K; 0-100K;
0-1 Meg; 0-10 Megohms—
D.C. CURRENT: 0-60 Microamp; 0-6; 0-60; 0-600
Milliomps: 0-6CHESE: 20
To 17 db [0 db=0.774V]
CAPACITY: 0.001-01;
0.005-15 mfd — INDUCTANCE: 20-2000 henries—0UTPUT RANGES: 0-6; 0-30; 0-120; 0-400; 0-1200 Volts
he new Laftayette high sensity Multitenter is a compile

## Wew! MINIATURE POCKET MULTITESTER

ONLY

- . 20,000 Ω/v DC SENSITIVITY . 10,000 Ω/V AC SENSITIVITY
- . 1% RESISTORS
- . WEIGHS ONLY 10 oz.

and eradicating of switch markings, protecting your meter and preserving its appearance. Single selector switch with positive detents and clearly marked positions permits one-handed operation. Recessed, break-proof zero-ahms knob permits easy adjustment, yet cannot be broken even under rough handling.

Has 23 ranges at the unusually high sensitivities of 20,000 ahms per valt DC, 10,000 ahms per valt AC. DC Valts, 0-5-25-100-500-1000; AC Valts, 0-5:25-100-500-1000; AC Valts, 0-5:25-100-500-1000; OHMS; 0-6 K-600K-6 Meg-60 Meg; DC MILLIAMPERES, 0-0.05 [50 microamps] -5-50-500; DECIBELS, -20 to +64 in 5 ranges.

Truly a superb instrument for any application, "Camplete with 1.5 volt and 15 volt batteries, and vinyl insulated flexible test leads. Shpg. wt. 1 lb.

- . 38 HA MOVEMENT
- . 23 RANGES
- . COMPLETELY WIRED





THE DIFFICULT WORK IS ALREADY DONE



. 20,000 OHMS PER VOLT DC ONLY • 10,000 OHMS PER VOLT AC 11.95

SERVICEMAN'S

NEEDS

The semi-kit is one concept in test equipment kits. All the Important or difficult parts are already mounted. All that remains to be done is to mount and wire in a few small parts — a job so simple you'll finish before you realize it, and best of all, you'll have one of the finest high sensitivity multitesters on the morket. When used no circuit, the high jnour resistance on all DC and AC ranges does away with the highly inaccurate readings.

A LAFAYETTE SPECIAL

COMPLETELY WIRED - NOT A KIT

. MOST ADVANCED ENGINEERING TO FIT

TUBE TESTER

common to low resistance testers which load the cirk Ranges: DC Votts, 0-10-50-250-500-1000; AC Votts, 0 50-250-500-1000; DC CURRENT, 0-500 va, 0-10-250 OHMS, 0-10K-100K.1 meg: DECIBELS, -20 to +36; P 0-5000 henries and 250 mmf. to .02 mfd. Block 5½" x 3½" x 1½". Camplete with test leads, all pond instructions and bottery. Shpg. wt. 3 lbs.
TK-10 KIT Net 11

FREE POINT" ELEMENT SELECTOR SWITCH-

MULTIPURPOSE TUBES: Special isolating circuit allow each section of multi-purpose tubes to be tested individually as if it were in a separate envelope.

enverope.
SHORTS AND LEAKAGES: Supersensitive method checks shorts and leakages up to 5 megahm between any and ALL elements; continuity between various sections individually indicated.

various sections individually indicated.

SIMPLICITY: Fast simple operation. The 4 position fast action snap switches are all numbered in exact accord with RMA standards. Thus when testing element terminating in pin No. 7 of a tube—you use button No. 7. You can't insert a tube in the wrong' socket—there's one for each type of tube base.

tube base.

TUBE TYPES: Tests all octal, loctal, 7 pin miniatures, 9 pin miniatures as well as the new noval and Sub-Minar types. Old type sockets used for testing obsolete types—that you rarely see anymore—have been eliminated.

SIZE: A practical size to carry with you as well as far use in the shop—only \$1/2 x \$4/6 x 21/4" deep. Shop, Wt. 5 lbs.

MODEL TO-55—complete with carrying case and instructions.

A new streamlined tube tester with a realistic approach to the problem of quickly testing the ever increasing number of tube types. It incorporates new and advanced engineering features and all at a price of about half of even the most ordinary tube tester. Read these Specifications. FIRE: Newly designed, it reduces possibility of obsolescence to a minimum because any pin may be used as a filement pin and voltage applied between it and any other pin, or even the "top cap". Tubes with tapped filements or with filements terminating in more than I pin are truly tested.

**EDGE-WISE PANEL METERS** 

AR-660 MINIATURE POCHET VOM

- 2% FULL SCALE ACCURACY
- D'ARSONVAL MOVEMENTS
- FRONT PANEL AREA ONLY 31/4 × 1

Precision D'Arsonvol meters with 2% or better full scale accuracy. Front panel dimension is 3½ x 1". Overolt depth is 3½" behind panel including terminals. Zero adjust screw. Shop. wt., ¼ bs.
VU METER—Colibrated and damped in occordance with standard VU meter practice. Upper scale reads -20 to +3 VU. Lower scale reads 0.100% amountation. Accurate to ±0.5 VU from 30.15,000 cps.

TM-23 Net 5.95
0-150 AC VOLTMETER—Full-wave bridge rectifier type, 1000 ohms per voit. 5 volts per division, linear scale.
TM-22 Net 5.95
0-1 DC MILLIAMMETER—CALIBRATED from 0-1 ma in 0.02 ma, divisions. Black scale red pointer. mo. divisions. Black scale, red pointer

## FAMOUS RCA VOLTOHMYST IN KIT FORM



29.95!

49.95 Wired

ONLY 3.00 DOWN

FAMED WY-77E VOLTOHMYST VTVM

3% ACCURACY ON DC

RESPONSE ± 5% 40 CPS to 5 MC.


OC INPUT 11 MEG.

This new kit mokes possible substantial savings in a high quality vacuum-tube voltmeter. Its 28 ranges include 7 DC voltages: 0-1.5, 5, 15, 50, 150, 500, 1500, with ± 3% of tull scole occuracy and input resistance of 11 megahms; 7 rms AC voltages: 0-1.5, 5, 15, 50, 150, 500, 1500, with ± 5% of full scale accuracy; 7 preak-to-peak AC voltages: 0-4, 14, 40, 140, 400, 1400, 4000 volts, with 5% occuracy; 7 overlapping ohms ranges from 0.2 ohms to 1000 megahms with center-scale values of 10, 100, 1000, 100, 10

RCA WV-77E(K) Voltohmyst Kit ...

WV-77E Same, completely wired and factory-colibrated Net 49.95

## SQUARE PANEL METERS



ACCURACY 2% OF FULL SCALE
3%" SQ., ONLY 1-5/16" OVERALL BEHIND
PANEL • BAKELITE CASES • JEWELLED

Migh quality, precision built meters with better than 2% of full scale occuracy. 3½" square, 2.5/16" x 1½" day faces, 1-11/16" averall depth. 1-5/16" behind panel including terminals. Require 2.9/16" diameter mounting hole. ½" screw terminals plus solder lugs, 4 threaded mounting studs in corners. Zero odjust screw. Shpg. wt., 1 lb.

ILLUMINATED SCALE VU METER

ILLUMINATED SCALE VU METER — Standard 3900 ohm

"8" scale votume indicator caliarated and damped in occordance with standard VU meter practice. Upper scale reads 0-100% modulation, lower scale reads 20 to +3 VU (0 VU carresponds to 100%) Accurate to +0.2 VU (1 VI carresponds to 100%) Accurate to +0.2 VU (1 VI carresponds to 100%) Accurate to +0.2 VU (1 VI carresponds to 100%) Accurate to +0.2 VU (1 VI carresponds to 100%) Accurate with reach 99% of carrect reading within 0.3 seconds; overshoot beyond correct reading is 1 to 11/3%. A road-mean-square instrument with full wave bridge rectifier. Includes built-in 6-8 vollt bulb. Complete with instructions.

TM-80 Net 7,50

0-50 OC MICROAMMETER
0-50 DC MICROAMMETER — Highly damped, sensitive mavement, calibrated in 50 one-microamp linear scale divisions. Cushioned ceramic bumpers protect pointer against avertravel and damage with maderate averlaads.

0-1 DC MILLIAMETER 0-1 DC MILLIAMM quick-octing basic

movement. Linear calibrations in .02 ma. divisions. Black

0-150 AC VOLTMETER
0-150 AC VOLTMETER — Full-wove bridge rectifier type.
1000 ohms per valt. With precision carbon-film multiplier
resistor. 5 volts per division, tineor scale.



METER RECTIFIER A brand new, economical meter rectifier of exceptionally linear characteristics. This full wave rectifier is specially designed as a universal replacement for all madern multimeters, such as Lotoyette's miniature V.O.M.'s. Simple to install, maunts with single screw. Long terminals facilitate easy connection.

Net .45

## Miniature

. D'ARSONVAL MOVEMENTS

. BAKELITE CASES . JEWELLED BEARINGS ONLY 1-9/16" SQ. FACES, 1 1/4" OVERALL BEHIND PANEL • ACCURACY 2% OF FULL SCALE

UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUAL UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUALITY! Ruggedly built miniature ponel meters, with excellent accuracy. 1½" diol faces, with sitwered diols and black numerols and pointers. Accuracy 2% of full scale. 1.9 116" square fronts, 11½" overall front-to-back, with 1½" behind ponel including ½" terminols. Require 1½" diameter round hale in ponel; 4 corner hales for mounting, with 1½" centers. Terminol polarity on DC models clearly marked. Screw terminols. Zero adjustment screw on front of ponel. Clear aptical aloss fronts. Shape, wt. 8 az

of panel. Clear optical class frants. Shpg. wt. 8 az VU METER
VU METER
VU METER
VU METER—Volume level indicator, calibrated in standard—20 to ±3 VU and 0-100% ronges. Uses precision carbon film multiplier resistor and full wove rectifier. Damped in accordance with standard VU meler requirements. Reference level 1 mw in 600 ohm line. 10,000 almostrated coross meter connected to 600 ahm source with 600 ohm load. May be used with 1-pad attenuator. 0-100% scale used to indicate percent use of transmitter autput.
TM-10

Net 3.95 TM-10

"S" METER

"5" METER — Standard "ham" signal strength indicator. Collibrated in "5" units from 0.9, with the scale terminating in + 10 and + 30 db calibrations. Additional full scale collibration of 0.5 and 0.10 in tineor scale divisions. A "must" for radio amoteurs for conversion of any communications receiver with AVC action to give calibrated signal strength indications. Use of "5" meter fully described in 1958 "Radio Amateur's Handbook" (Lafoyette stack No. BK.1000), pages 106-107.

DC MILLIAMMETERS

0-50 DC MILLS TM-200 MICKUAMPERES Net 4.95 50-0-50 DC AMPERES 0-10 DC AMPERES R. F. AMMETER Net 3.95 Net 3.95 TM-500 VOLTMETERS U-15 DC 0-200 DC 0-150 AC 0-300 AC TM-100 TM-101 TM-300 TM-301



## LAFAYETTE is your HEADQUARTERS NTENNAS AND





REGULAR LIST 13.45 OVER 60% OFF!

- · ALL ALUMINUM
- . NO LOOSE PARTS
- . FASTEST INSTALLATIONS

FULL 20 ELEMENT STACKED Snap Open Conical SINGLY EACH

5.25 

AN-32—Vio Express only. Shpg. wt., 18 lbs.

"U-INSTALL-IT" KIT With Chimney Maunt. Same antenna and accessories but includes chimney maunt instead of roof mount.

Net 8.75
AN-43—Vio Express only. Shpg. wt., 18 lbs.

## **FAMOUS BRAND** Color 'Tenna

PRICE BREAK - Over 50% Off!

LIST 29.95

SALE 13.95!

**Gold Anodized** 

- High Gain On All VHF Channels
- Completely Factory Preassembled
- · Electronic Lens Design
- Highly Directional Yagi Performance

Lofoyette is the FIRST to offer this nationally tried and proven antenna at close to 25% off the regular dealer price. This is the same fine antenna—with all its exclusive features—that sells for dallars more than our record-breaking price. Check these features: Electronic Focusing—High Gain—all VHF channel coverage—anadized quality construction—easiest Installation—autstanding fringe area reception—compost design dynamically balanced. All-aluminum construction—automatic hardware. Shpg. wt., 8 lbs. Via Exaress only.

AN-51 List 29.95

Camplete Kit of AN-51 antenna plus AM-12 mtg. kit os shawn. Shpg. wt., AN-52

"U-INSTALL-IT"



All the occessory items necessory to do an ine occessory terms necessary to a quick, easy installation from roof to receiver! You get an all angle roof mount—lightning arrestor—75 feet of 300 ahm twin lead—6 insulated screw eyes—2 insulated most standaffs and a 5 ft., 11/4 OD steel most. Shpg. wt.,

AM-10..eo. 2.95 Lots of 3, eo...2.85 AM-11 with 2-5 ft. mosts. Shpg. wt., 10 lbs. Singly, 3.55 Lots of 3, ea. 3.35 AM-12—Same as AM-10 but with chimney mount. Ea. 3.25 Lats of 3, ea. 3.15

AM-13—Same as AM-11 but with chim-ney mount. Ea. 3.85 Lats of 3, ea. 3.75

NEW WUERTH SURGISTOR



Designed to prolong tube life in TV receivers. Connect directly into the power line circuit of electronic devices. Protects tube filaments, electrolytics, rectifiers, etc. from destructive surge voltages and currents. Starting resistance, 100 ohms. Normal resistance, 100 ohms. Normal resistance, 100 ohms. ohms. Circuit power range 100-300 watts. Time delay approximately 10 seconds. Shpg. wt., 6 oz.

TS-263 \_\_\_\_\_Each, Net .99 Quantity of 10 or more Each, Net .90 FOR COLOR TV

Specially engineered for Color TV sets, the COLOR SURGISTOR slashes expensive Color TV tube replacement costs. Guarantees longer picture tube life too. 250-400 WATTS: 117 VOLTS, AC-DC.

TELESCOPING TV MASTS

Heovy-duty telescoping musts, ideal for ony IV ontenno array. Hot-dip zinc galvanizing Inside and autside provides unusual ruggedness and impenetrable carrosion resistance. Designed for easy installation and assembly. Husky thumb boits lock sections automatically. No slipping, no twisting. Precision fitting assures lasting service. 18 gauge .003" wall. Supplied complete with all guy rings, clamps and necessary hardware. Total 5 10-ff. sections for height up to 50 ff.; O.D.: #1 (1½"), #2 (1½"). #3 (1½"). #4 (2"). #5 (2½"). Shipping express only.

SO.FT. MAST — Consists of all 5 sections listed aboves Nas. 1, 2, 3, 4 and 5. Height 50 feet. Shpg. wt., 48 lbs.

Model TL-63 .....Net 13.73

37 lbs. Model TL-62 ......Net 10.05

30-FT, MAST. Consists of 3 sections. Nos. 1, 2, and 3. Height 30 feet. Shpg. wt., 26 lbs.

26 lbs. Madel TL-61 ......Net 7.28

20-FT. MAST. Consists of 2 sections. Nos. 1 ond 2. Height 20 feet, Shpg. wt., 17 lbs.

Model TL-60 ......Net 4.58

....Net 1.15 TS-290-List Price 1.95....

## LAFAYETTE LEADER KITS



SPECIAL TUBULAR AIR-SPACED TWIN LEAD

 UHF-VHF Extreme Low Loss 300 ohm airspaced tubular lead with copperweld conductors. Shap, wt., 3 lbs. per 100 ft.

WR-46-per 100 ft.

2.50 per 100 ft.



AN-35 3 Section Indoor Antenna (a): Adjust able indoor antenno. 3 section aluminum staffs. Heavy, crackle finish base. Complete with 300r twin lead. Shop. wt.. 21/3 lbs. AN-12......Singly, ea. 1.15 In lots of 3, ea. .99

PORTA-TENNA (c): A universal antenna for portable and stationary TV sets. When not in use dipoles disappear. Can be placed on back of any TV set. 3 section, plated, telescoping dipoles. Complete with instructions, mounting hardware and lead in. Shpg. wt., 2 lbs. AN-35.

## SUPER FRINGE AREA ANTENNA



THE MAXIMUM ANTENNA FOR YOUR AREA. . MAXIMUM CONSTRUCTION

AN-37 List 3 3-19 .... Not 14.55 PERFECT 300. MATCH AN-38 2 Boys stocked ....Not 29.58 ON EACH CHANNEL.

"U-Install-It" kit: Includes AN-37 and installation kit as shown with one 5 ft. mast. Shipping wt., 20 lbs. AN-40 Net 16.95
Stacked Kit: Includes AN-38 and installation kit with two 5 ft. masts.
Shipping wt., 32 lbs. AN-41 Net 32.69

VHF - UHF - FM ANTENNA

AN-37, 38 and 41 Shipped by Express Onlyl

Net 1.59 BLONDER-TONGUE UNIVERSAL ALL CHANNEL'S "RIVIERA"



BOOSTER & COUPLER

- . BOOSTS SIGNAL FOR 1, 2, OR 3 TV SETS
  - . COUPLES 1, 2, OR 3 TV SETS WITH 1 ANTENNA
  - . WORKS WITH ALL TV SETS
  - -IDEAL FOR COLOR TV · PERFECT FOR MULTIPLE DWELLINGS

WR-28-50 ft.roll(Shpg. wt., 1½ lbs.)Net.35 WR-29-100 ft.roll(Shpg. wt.2, lbs.) Net.59 WR-30-500 ft.roll(Shpg. wt. 12 lbs.) Net 2.78

....Net 1.79

TRI-SET COUPLER

ZUB21/4. All Angle Base and Roof Mount. ALL ANGLE BASE

. FIXED TUNED-CHANNELS 2-13.

HANG IT ON REAR OF SET AND FORGET IT!

Made by the leading manufacturer of television amplifying equipment, this Made by the leading manufacturer of television amplifying equipment, this fiexible combination television booster and 3-set coupler is a fine example of advanced engineering design and construction. It provides improved home TV reception without the need for tuning or adjustments. Simply make connections to convenient screw terminals, hang it on the back of the TV set, and forget it. Automatically amplifies channels 2 through 6 more than 6 db; channels 7 through 13 more than 2 db. Input for standard 300 ohm balanced antenna. Outputs for 1, 2 or 3 TV sets, 300 ohm balanced. Low noise figure—works well with all latest types of TV sets and reduces interference. Amplifies the signal on 1 or 2 TV sets, whether one or both are operating. Permits use of 1 antenna on up to 3 TV sets—outperforms all non-powered couplers by more than 2 to 1. Size 644" x 344" x 242". Uses 6BK7A or 6BK7B tube. For 117 volts, 60 cps AC. Shop, wt. 2 lbs.

BLONDER-TONGUE 8-23 List Price 23.95 STEEL GUY WIRE Six strands of No. 20 high tensiled strength galvanized steel wire. For any guy application. An excellent buy.


TS-37. List 3.05.....

and ROOF

MOUNT

design permits unlimited spacing between brackets for maximum support of masts 1/5" to 11/5" O.D. Complete with two 12-ft. lengths of 3/4" galvonized steel bands and hardware. Shpg. wt. 3 lbs.

300 OHM TWIN-LEAD



1.39 COPPER CONDUCTORS per 100 ft. LO-LOSS POLYETHYLENE

High quality, law-loss lead-in for all TV and FM installations. Polyethylene dielectric—standard copper leads. Shpg. wt., 2 lbs. per 100 ft.

Stock No. WR-25-100 ft. 5.75 1,000 ft 10.95

> UNIVERSAL TV TUBE "BRITENER"

> > TV

in lots of \$ 1.39 Restares brightness to dim TV picture tubes. Operates on all types—magnetic ar electrostatic-and in all circuits-perallel

TS-170—in tots of 6 Singly



UNTIL SEPT. 15th 17.95

GUARANTEED 200 MILE VHF RECEPTION OR YOUR MONEY BACK Receives channel 2-83 from all

- directions without a rotor
- Broadband UHF-VHF and FM. motoriess all direction recep-
- All aluminum flip-out assembly

Field tests reception on VHF of up to 200 miles has made possible this unprecedented guarantee. Here is an antenna with one transmission line for all UHF, VHF and FM stations in all directions without the use of a rotator. The nine position selector switch connected at the set electronically rotates antenna beam instantly without physically moving the antenna. Gain on channels 2-6 comparable to 4-bay concest; on channels 7-13 comparable to 4-bay conparable to bow-tie reflector. 16 ½" doweled aluminum elements are 60 inches long. Complete with switch, coupler, 45" stacking bars and 2 7½" angle type mast insulators for Polymicalene line listed below. Shpg. Wt. 10 lbs. ALL CHANNEL RIVIERA
LESS MAST

ALL CHANNEL LEAD-IN WIRE FOR USE WITH RIVIERA ANTENNA

Via Express Special 4 canductors, matched imped ance transmission line. Law loss, mica filled Polymicolene con

WR-8-50 ft. length .Net 5.00 WR-18 - 100 ft. length . Net 8.90 WR-9-75 ft. length .Net 7.50 over 100 ft., per 100 ft. Net 8.90

## Highly efficient 3 set coupler, for coupling 2 or 3 TV or FM sets to one onlenna of any type. No interaction—less than 6 insertion loss. 40 to 50 db rejection ratio. Shops. wt., 1 lb.T\$-266 Net 2.97

AUB2/4. All Angle Base and Koot mount. Most popular swivel base mount in use taday. Works on any surface—flot, slont, peak or wall. Heavy gauge weather-proofed steel. Takes any most up to 2½ O.D. Complete with hardware.

10 Ft. Most shipped via express only.



Absolutely no tools or soldering needed for installing this handy inexpensive tube rejuvenator. You simply attach two plugs as directed on the instructions. For mag-netic tubes and PARALLEL CIRCUITS only. Renews brightness contrast. MS-12 in late of 10, each 79- singly. 89 TS-268.

**NEW! TV TUBE** RESTORER

LOCATES AND CORRECTS FOR . OPEN CATHODE . HEATER TO CATHODE SHORT . OPEN CONTROL GRID . CONTROL GRIO TO CATHODE SHORT . LOW EMISSION . COMBINATIONS OF ABOVE




One simple unit provides the cure to any defective picture tube in any TV set. Warks on electrostatic or electromagnetic facus picture tubes in series or parallel-wired filament TV sets. Carrects far dazens of picture tube faults. Shpg. wt., 1 lb.

## AUTOMOBILE RADIOS ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38

## E UP 75% ON LAFAYETTE RADIO PARTS

## PORCELAIN CASED TUBULAR CAPACITORS



**Greatest Condenser** Value Ever Offered!

KIT O	100	600V W V D							
400V V	V V DC								
QTY	MPD	QTY	200						
10	.001	5	.00						
10	.002		.00						
10	.005	3	.00						
20	.01	10	.01						
10 30 30	.02	10	.01						
20	.05	10	.03						
10	.1	3	.1						

KIT NO. KI-52 1 List Valve 32.00 4.95 SPECIAL NET

KIT NO. KI-51 Hat Value 16.00 2.75

SPECIAL NET

TESTED AT 3 TIMES WORKING VOLTAGE
EXCEPTIONALLY RESISTANT TO HIGH TEMPERATURES AND MOISTURE
SURPASSES PERFORMANCE OF MOLDED PLASTIC TUBULARS

They're new, they're different, and they're better! Now, or a price for less than their of ordinary plastic molded tubulars, Latayette brings you, for every day service work, a condenser that was designed for critical industrial applications. The case is of durable gleaming porceloin, a caramic known for its high degree of imperviousness to moisture and resistance to heat. The capacitar is affect quality, tested of 3 times the creted voltage with much closer capacity leterance. It maintains its characteristics under extreme conditions of heat and fixmelity. It's mechanical construction is excellent, the leads are firmly entached and sealed — they won't twist or break off. We've is elected the most peopular values and put them up in two servicement designed kits. Each condensar is plantly marked. Each value is mounted on separate heady strips. All are conservatively rated at 600 OC working volts. See chart for contents of each kit.

## **HEAVY DUTY 10 AMP DPDT MOTOR SWITCH**

. MOLDED PHENOLIC

METAL FACE PLATE

Workmonship on this switch is of the best quality. Terminals are oversize, flow-free solder type which makes for neat, no-arc connections. Roted 10 Amps at 125 Volts, contocts easily take the current surges of motor starting. Size 13/4" x 1/8" x 1". Bushing 7/16" dia., 3/4" long, bat hondle 3/4" long, Shop, wt., 6 oz.

SW-26 OPOT Toggle Switch



## MIDGET-BAKELITE KNIFE SWITCHES

Compoct switches mounted on black bakelite base with insulated knob handle of black bakelite. Plated brass cantacts provide positive low-resistance connection.

SPDT KNIFE SWITCH
Overall size 11/6" x 23/6", Shpg., wt., 6 oz.
SW-23 Net .12 ea. — 10 for .99 DPDT KNIFE SWITCH

Overall size | 1½" x 2¾". Shpg. wt., 4 oz. 5W-24 Net .19 Eo. — 10 for 1.75



20 for 1.17

Sturdy nickel-ploted bross jows with plastic insulated thumb rest and insulated borrel. Strong spring with hard bite. Solder lug connection. Overall length 21/6", Shpg. wt., 4 oz. Supplied in Red and Black.

MS-451—Red Alligator Clip MS-452—Black Alligator Clip

## A FABULOUS BUY! GENUINE LAC and ALLEN-BRADLEY Resistor Kit



10% TOLERANCE

INSULATED RESISTORS

with QUANT. OHMS PLASTIC HINGED BOX!

Lafayette leads the field with a senuine
Allen Bradley and IRC 1/2 watt, 10% tolerance, molded resistor kit with a Transparent Plastic Utility Box (built in partitions) size: 81/4" x 4/2" x 1-3/16". The finest resistors on the market. Molded into 1 meg sulated composition resistors. Meet JAN-81.1 specifications, including, salt water, innurersion and high humidity tests

Brock No. Ni-123—Total 100 molded resistors with Transparent Plastic Case.

NET 4-50 100 TOTAL



## LAFAYETTE METAL CASED OIL FILLED TUBULAR CAPACITORS • Exceptional capacitance stability • 10% Tolerance High Insulation resistance Wide temperature range

e all-filled and all impregnated paper capacitors are manufactured to standards. Features 10% tolerance. Operates efficiently from -40°C to 0°C. Ruggedly constructed in metal case with plastic insulating outer to withstand shock, voltage surge, maisture, and other adverse aperationalities. Has tow dielectric leakage, low power factor and exceptional citages stability. Lightweight compact, models as each of these services life. ang conditions, not tow dissectiff leakage, low power roctor and exceptional capacitance stability. Eightweight compact, mode to render long servicing life. Ideal for replacement and original applications in radio, TV and other electronic equipment. Outside foll is clearly printed. Doubly tinned copperweld type leads are firmly attached to the case. Conservatively rated at 600 WVDC. Ave. shpg. wf., 5 az. each.

			NET		ACH
	CAP	SIZE		Lots of	Lots of
TYPE	MFD	DXL	SINGLE	10	100
C-800	,001	9/32 x 26/32"	.09	.81	7.00
C-801	.002	9/32 x 26/32"	.09	.81	7.00
C-802	.005	9/32 x 27/32"	.09	.81	7.00
C-803	.01	9/32 x 27/32"	.10	.90	7.90
C-804	.02	10/32 x 27/32"	.11	.99	8.50
C-805	.05	13/32 x 1"	.12	1.08	9.50
C-806	.1	15/32 x 17/16"	.14	1.26	11,40

NEW! sub-miniature

TRANSISTOR AUDIO TRANSFORMERS

Input, Output and Driver Transformers

A new series of miniature transformers for transistor and experi-

mental miniature circuits. Ideal for miniature radio receivers, amplifiers, hearing aids, etc., using standard transistors. Incorporate special heat-treated high permeability magnetic cores and treated to resist corrosion. Designed for improved frequency response with low distortion. 3" color-coded leads. Average shpg.

TR-97 IMPUT TRANSFORMER—Primary impedance 100,000 ohms; secondary 1000 ohms; DC resistance primary 1000 ohms;

TR-99 ONTPUT TRANSFORMER—Primary impedance 10,000 ohms; secondary 2000 ohms, center-tapped. DC resistance of primary 240 ohms; secondary 60 ohms, center-tapped. Net .79 TR-99 OUTPUT TRANSFORMER—Primary impedance 500 ohms center-tapped; secondary 3.2 ohms. Primary DC resistance 42 ohms, center-tapped; secondary 0.7 ohms. Net .79

• Only 1/2" x 1/2" x 1/2"

secondary 1000 ohms

## HEAVY SHIELDED PHONE PLUGS





INSULATED **ALLIGATOR** TEST CLIPS WITH 6 FT. LEAD



Brass, nickel-ploted adopter. Has standard phone jack on one end to take regular phone plug, and RCA-type phono plug an other end. Has threaded bushing with nut and washer so can be ponel maunied if desired. Shpg. wt.,

TEST LEADS

ed with plastic prods and

pin plugs which withstands

chipping or breaking. "Extra Rezible kinkless vinyl covered 60" red and black

block. 4" long x 5/6" diam

eter. Supplied in pair of one red and one black.

Available with either pin or banana plugs. F-344 Test Leads With Banana Plugs Net .39

F-345 Test Leads With Pin Plugs

Prods are red and

Net .39



Precision VERNIER DIALS

Precision planetary drive vernier dials with approximately 8 to 1 ratio, Mounts on panel surface and has accurately centered metal inserts for 1/4" shafts, Metal dials are brushed silver finish with deeply etched and black filled engraving to provide maximum legibility even under poor lighting conditions. Reads counter-clockwise 0 to 100 in 180°. Uses tough scratch resistant for sure grip fluted molded knob and housing. Phosphor bronze and brass utilized for internal parts.

F-347 50 MM (2") Diometer Vernier Oiol, 1" from front to bock F-346 70MM (2%") Diometer Vernler Diat 1 1/4" from front to back Net 1.00 Net 1.40

## LAFAYETTE SPECIAL 2-CONDUCTOR PHONE PLUGS

STANDARD 2-CONDUCTOR PHONE PLUGS
Phone plugs for a wide variety of applications with
holes of handle sizes and materials. All sleeves fit dard 1/2" phone jacks.

A. SLIM PHONE PLUG Smooth bakelite handle

Solder terminals with cable clamp.

MS-453

Not .25 ea. — 10 for 2.15

FIG. B. BARREL PHONE PLUG Ribbed plastic barrel

handle, Screw terminals.

Not . 22 eo. — 10 for 1.90'
FIG. C. SHIELDED SLIM PLUG Ribbed chromed metal handle, Solder terminal with coble clamp.

MS-443

Not . 22 eo. — 10 for 2.90

Ribbed chromed metal handle, Solder terminal with coble clamp.

MS-443

Not . 29 eo. — 10 for 2.50

FIG D. PHONE TO PHONO PLUG ADAPTER Adapts from standard phone plug to RCA type phono plug.

Overall length 2%" x ½" diam.

MS-444

Not . 39 eo. — 10 for 3.25

STANDARD PHONE JACKS FOR 1/4" PLUGS

FIG. E. OPEN CIRCUIT JACK Standard open circuit phone lock, 1/4" bushing, 1/4" long. Complete with mounting hordware.

MS-441 Net .19 ec. — 10 for 1.75 FIG. E. CLOSED CIRCUIT JACK Some as above but MS-454
MS-454
Net .19 eo. — 10 for 1.75
FIG. E. OPEN CIRCUIT JACK Open circuit jock for

MS-318
FIG. F. EXTENSION CABLE JACK Fit standard 1/4" phone plug. Screw terminals. Barrel plustic handle matches MS-455 Barrel plug.
MS-442
Net .22 ea. — 10 for 1.90



Bail handle S.P.S.T. toggle switch in molded bakelite cose. Rated 3A-125 Volts. Supplied with chrome metal an off indicator plate and two mounting nuts. Body size 11/6" as 1/6" x 1/7" behind ponel. Bushing 7/16 Diam., 7/16 Long. Boll handle 1/5" long. Shop. wt., 4 oz.

SW-21 SPST Taggle Switch

Net .22

In lots of 10, Each .19



## **PUSH BUTTON**

Momentary contact push button switch ideal for burized applications. Single pole two circuit p type. Berylium copper lead contacts. Overall di averall depth 11/14" protrudes 3/6" behind ing 1/4" dia., 3/16" long. Supplied with mounting nut. Shape. wt., 3 oz. MS-449 Miniature Push Button Switch



## **HEAVY DUTY** 6 AMP **DPDT SWITCH**

breakdown insula-tion terminaling in coded 2" long x 3/6" dio. plastic grip bonana plugs. 3 sets of changeable terminals are included. They all rectly an to the banana plugs. They are spade minals, ahane tips and red and black insulated clips. These items have their awn handsome an compartmentalized flexible plastic case while shut. Shpg. wt., 1 ½ lbs.

BUDGET UNIVERSAL TEST LEAD KIT IN PLASTIC CASE

Not .32 In lats of 10, Each .29



## **HEAVY DUTY 6 AMP** DPDT CENTER OFF TOGGLE SWITCH SPECIALI

Heavy-duty double-pole double-throw for control of lighting circuits, high power p.o. horns, electrical appliances and motors. Rotad of a amps 125 volts AC or 3 omps 250 v. AC. Metal on-off indicator plate and mounting nuts. Switch body 1-5/16" x 3½" x 1" behind panel, including terminals. 7/16" bushing, 7/16" diam. 3½" bot handle. Shorn wit 8 or terminals. 7/16" bushing, 7/16" diam. 3/4" but handle. Shpg. wt., 8 oz. SW-19 Net .49 In lots of 10, Ea. .45

Net .39 In lots of 10, Each .35



## RUGGED TELEPHONE TYPE 4PDT LEVER SWITCH

ANOTHER



Small 3-position lever action telephone type switch of rugged non-inductive construction, perfect for large intercom switching ponels, test equipment, model railroad cortrol panels, communications systems, etc. Hos 4 sets of single-pole, double-throw contacts. Chrome-plated actualing cam has 3 lacking positions and story put in each position. (Switching action is shown in accompanying schematic diagram.) Black Insulated lever handle. Heavinsulated rollers at end of cam actuate switch contacts. All contacts easily demountable for making connection, if necessary. Mounts to panel with 2 screws flurnished, 1/5/8" mounting centers. Size 21/8" long behind panel, 1/4" wide, 1-5/16" high. Shap, et., 6 az.

SW-20 3-Position Telephone-Type Switch. Net. 49 Ea. Lots of 10, .65 Ea.

## LAFAYETTE JUMBO 5-WAY BINDING POST

Accepts phone tip plue, a spade lug, a banana plue, an attigator clip and a strond of wire. Head non-removable from stand. Molded plostic construction. For panels 1/16" to 4" thick. In either fed or block color, specify. pJ-37—5hpg. wt., 8 az. Net Eo. 25¢

HEAVY DUTY 10 AMP SPDT CENTER OFF TOGGLE



This heavy duty switch is ideal for small size equipment, Heavy silvered lugs for low-loss connections. Roted 10 amps at 125 volts. Body size  $1\frac{1}{6}$ " x 9/16" x  $3\frac{1}{6}$ " depth behind panel, Bushing  $3\frac{1}{6}$ " dio., 7/16" long. Bot handle  $1\frac{1}{2}$ " iong. Shog. wt., 4 oz. SW-27 SPDT Taggle Switch.



## LAST MINUTE LAFAYETTE BUYS



AT TREMENDOUS

## fayette's IMPORTED SLIDE RULES

NEW! DELUXE LOG LOG DUPLEX DECI-TRIG SLIDE RULE

 Machine Engraved Graduations
 Scales with 8 Log Log Scales
 40" Log Log Dec. Fractions
 Scale
 Extended Range Avoids "Going Off Scale"
 Extra P Scale Simplifies Computations

Scale Simplifies Computations
Constructed at specialty selected, laminoted, non-hygroscopic bomboo.
This broad new 10° log log duplex trig slide rule is built for the most exacting demands and is a truly universal calculating instrument. Contains 25 scales in total. Has 8 Log Log Scales-40° Log Log Decland fraction scale. The need for the troublesome end-forend resetting of the slide is eliminated by the extensions of the C and D scales. Other scale arrangements also allow easier calculation of problems involving the value of trigonometric functions. The twin set of Log Log scales in four sections each runs from 1.001 to 100,000 and .999 to .00001, thereby enlarging the scale by one scale length each compared with ordinary log log slide rules. Extra features include the P scale which enables easy computations of vector problems involving two sides of a right triangle. Scales include L101, L102, L103, DF, CF, CT, CT, CD, L13, L12, and L11, L100, L, K, A, B, S, ST, T, C, D, D1, P, and L10. Complete with instruction book and saddle leather case. Overall length is 14°. Shops wt., 1 ½ lbs.

Net 15.95



9 VOLT TRANSISTOR -VS300 TYPE

Replaces the following batteries: Burgess P6, P6M; RCA VS300, VS314; Eveready 226

BA-3 9 Volt Battery Reg. 1.23 Net, ea. .59 Lots of 10, ea. .53

671/2 VOLT

and hobbyists, etc.

P45M TYPE
Replaces the fol-lawing batteries:
Burgass P45, P45M;
RCA V5215, V5216, RCA VS215. VS216, VS218; Evereody 477 BA-1 671/2 Va't Battery Reg. 2.75 Net, ea. 1.59 Lats of 10, ea. 1.49

9 VOLT TRANSISTOR -2U6 TYPE Replaces the fallowing batteries: Burgess 2U6, RCA VS312; Evereody 216

Safayette BATTERIES

BA-2 9 Volt Battery Reg. 1.16 Net, eo. .59 Lots of 10, eo. .53

67 1/2 VOLT PORTABLE-Replaces the fol-lawing batteries: Burgess UX45, RCA VS318,

Evereody 416 BA-5 671/2 Volt Battery Reg. 2.95 Net, ea. 1.29 Lats of 10, ea. 1.19

RIDICULOUSLY LOW PRICES 67 1/2 VOLT PORTABLE-XX45 TYPE Replaces the fol-

lowing batteries: Burgess XX45, RCA VS016, Eveready 467 BA-6 Reg. 3.50

Net eo. 1.45 Lots of 10, eo. 1.35

## RECHARGEABLE FLASHLIGHT



15.95

NEEDS NO BATTERY ATTRACTIVE & DURABLE EASY FLIP-ON SWITCH

This small light weight flashlight fits easily into the palm of your hand. Twa-tone (orange and white) colar makes an attractive appearance. New concave glass top spreads out light. This unit can be used in many household applications. Ideal for use in the car. The detachable end covers a pair of male plugs by which the flashlight can be recharged. This feature allows the unit to be used for benchwork or where single light source is required in dark surrounding. Smooth flip-on switch permits easy action. Complete with one replaceable lightbutb. Measures 4½" in length and 1½" diameter. Shpp. wt., 4 oz. 7-435



MINIATURE MUSIC BOX MOVEMENTS

- PRECISION MOVING
- MORE THAN 3-MINUTES PLAYING TIME
- RUGGEDLY BUILT

These minioture music box movements have an infinite number of applications for the ingenious home builder. Can be mounted in cligarette boxes, perfume cases, etc. The unit is so delicately balanced that a slight touch on the flywheel is sufficient to start or stop the movement. Has full 18 note scale. Precision-built drum and moving parts are made to last a life-time. Components are mounted on a die-cast chassis. Camplete with threaded mounting holes and winding key. Size: 1% x 2% x %". Shape. wt., 6 oz.

MS-578 AULD LANG SYNE Net 1.88
MS-579 HAPPY BIRTMDAY Net 1.88
MS-580 HERE COMES THE BRIDE Net 1.88

## TRANSISTORIZED CODE PRACTICE OSCILLATOR

These popular batteries are for Portable and Tran-

sistor radios, R/C equipment, experimenters, labs,

FRESH STOCK — BRAND NEW — GUARANTEED -Here are three of the most popular types used and at



MINIATURE—PORTABLE

SELF CONTAINED BATTERY
POWER SUPPLY

COMPLETE WITH OSCILLATORKEY-EARPIECE
AND BATTERY

PRODUCES CLEAR, CRISP, CW

NOTE

PRICE IS RIGHT . EXCELLENT FOR BUILDING YOUR OWN CROSSOVER NETWORK SELF-HEALING TYPE

These oil filled metallized paper capacitors have the advantage that they are self healing. Even many breakdowns are harmless. Capacitance tolerance is ± 10% of 20°C, measured of 1000 cps. Insulation resistance over 500 megohms between terminols. Overall dimension for 2 uf capacitor is 1% x % x 1%". Overall dimension for 4 and 8 uf capacitor ore 1% x % x 2%" and 1% x % x 2%" respectively.

Shpg. Wt.

Here is an ideal, inexpensive code practice oscillator far the amateur radio enthusiast. Lang 38 inch wire from oscillator to earplece, allaws twa persons to practice without interference. The unit is completely portable, and weighs only 6 az. Oscillator case and key base are made of handsome black plastic. All moving ports are durable metal, with both adjustable spring tension and contact clearance. Spade lug connectors are located on the key making it possible to disconnect the key from the oscillator and use it separately if desired. Earpiece is crystal type, and housed in sonitary plastic. The code practice oscillator comes complete with oscillator, key, corpiece and bottery, and is ready for use. Na extras are needed. Tane praduced is clear and crisp, similar to that received during F.C.C. licensing examinations. Law voltage transistorized circuit utilized 1.5 volt penlight type battery which completely eliminates any possible shock hazard. Size: Oscillator 2½" x 2" x ¾". Key 4½" x 1½" x 1". Shpg. wt., 9 az. F.479

OIL FILLED METALLIZED PAPER CAPACITORS

## LAFAYETTE PRISMATIC READER

**EXTENSION PLUGS & JACKS** 

(A) Sturdy, heavy brass, nickel-plated RCA phone pluas. Provide excellent shielding. Ideal to use in high fidelity music systems. Length—1.5/16". Shpp. wt., 4 az.
Ms-593. Not .19
[8] Extension cable lack that matches MS-593 plug or any RCA phone plug. Shpp. wt., 4 az.
Ms-594. Not .19

MINIATURE RCA METAL INSULATED

48" CITIZEN BAND TELESCOPING ANTENNA

## ROAST MEAT THERMOMETER



Take the guesswark aut of roasting. Rugged sensing probe plus meter movement tells you the correct temperature for roasting meat. The meter scale is divided into six sections marked Beef Rare, Tender Ham, Beef Medium, Beef Well-done, Lamb-Fresh Pork, and Poultry. Non-breakable plastic window affords easy reading. Now, you can be sure your cooking is right. Shop. Wt.,



This Immersion Heater can be used easily in outo mobiles or vessels. It heats water in approxi-mately 2 minutes by simply plugging it into any autlet. Can be used to make coffee, teo, soup, etc., heats water for shaving and for warming the baby's battle. Complete with a plastic bag and instruction.

CROCODILE CLIPS

Nickel plated brass type for law resistance. Quality springs maintain positive action. Pro-vided with rubber insulation. Shpg. wt., 2 oz.

Stock Na. Amps Size

M5-582

MS-583



COMMUNICATION RECEIVER TYPE KNOBS Molded of top-quality Tenite, and have eosy-grip knurling. These knobs are 1-7/16" in over-all diameter with chrome-plated bevel skirts for attractive appearance. Depressed numerals are black enomelled on chrome plate. Designed to fit "" shafts.



.34 each .29 each in Lots of 6 KN-54. Numbered 0-10 through an arc of 300° clackwise. KN-55. With a single etched center line index. KN-56. Numbered 0-10 through an arc of 180° clackwise.

## **4PDT ROTARY SWITCHES**

New three-position rotary selector switch can be used in hi-fi preamps and stereo applications. %" diameter, and 1\%" shaft length. Quality construction with positive oction. Shop, wt., 6 oz.



NEW AMPHIBIOUS FLASHLIGHT

## **EXTENSION CABLE** WITH MINIATURE PHONE PLUG & ADAPTER

Perfect for extending earphone from transistor and partable radios. Extension up to 10 feet. Complete with miniature phone plug and adapter. Cable comes in attractive light pink color. Shpg. wt., 2 oz.

## ADJUSTABLE CURVE





FILAMENT CONTINUITY CHECKER



Eliminates expensive picture tube re-pairs. No elabarate equipment needed. Repairs grid and cathode shorts in two minutes—without pulling the chassis Easy to use—decontaminates cathodes—restores operation of brightness control. Shpg. wt., 1/2 lb.



10 for .99

## RCA SELENIUM RECTIFIERS

BRAND NEW FRESH STOCK - STOCK UP AT THESE FANTASTIC PRICES! TYPES MAY BE ASSORTED FOR QUANTITY PRICES! All Rated 130V. AC.

RCA NO.	MA.	LIST PRICE	NET SINGLY	LOTS OF 100	
201G1	150	1.60	.50	.40	.36
207G1	200	2.20	.55	.50	.45
208G1	250	2.30	.60	.52	.49
202G1	300	2.50	.64	.54	.49



## UNIVERSAL 6 & 12 VOLT VIBRATORS

Direct replacements for most popularly-used types, All brand new factory-fresh stock Made by leading national manufacturers, Fully guaronteed. Shpg. wt., 1/9, 1b.

Price Schedule

AS LOW AS 95: Replaces Mallory 294, 859, 901M; Radiart 5300 5301; and many others.

STOCK NO. MS-127 12-VOLT 3-PRONG Replaces Buick, Olds, Pantlac and GM part no. 1220155; Mallary G874, CD 6330, Delco 8550; and Vokar 3129.

1.29 Voker 3129.
1.19 STOCK NO. MS-128 12-VOLT 4-PRONG
1.09 Replaces Mallary G859, Materale 488522000, Philico
.99 and Maper 83-0025-1, ATR 1340, Voker 4124; and
.95 most later 12-volt car-radio vibrotors.



## RCA YOKES

AS LOW AS 95¢ YOKES MAY BE ASSORTED FOR QUANTITY PRICES

RCA NO.	HOR.	RESISTANCE VERT.	MAX.	PRICE	SINGLY	LOTS OF 5
201D12	8.3	64.6	57°	9.00	1.05	.95
237D1t	12	42	90°	10.00	1.75	1.75
205D1	12.5	68.8	57°	10.00	1.10	.99

Supplied with damping and neutralizing elements

## MOTOROLA

## 10% DOWN! MOTOROLA AUTOMOBILE SETS

UNIVERSAL MANUAL TUNING AUTO RADIOS WITH EXTERNAL OVAL PM SPEAKER



MODEL 8MX

TRANSISTOR POWERED This transistor powered car radio instalis easily an dash of most cars. Features 7 tuned circuits with 5 tubes plus transistor, noise eliminator circuit, automatic volume control, tone control and 6" x 9" externat speaker. Size 7\%" x 2\%" h x 5\%" d. Less trimplate. For 12 valt cars. Shipping weight, 7 lbs.

MOTOROLA 8MX

Not 43.75

TRIM PLATES

For neat in-dash instal lations in domestic cars. Specify make, year and model when ordering.

A	MAKE	YEAR
9	BUICK	54 thru 59
7	CHEVROLET	53 thru 59
	CHEVROLET-GMC	
	TRUCK	55 thru 59
	EDSEL	58-59
pe	NASH RAMBLER	57 thru 5
	PLYMOUTH	53 thr , 59
5	PONTIAC	57 thru 59
	STUDEBAKER HAWK	55 thru 59

FOR TRIM PLATES FOR SPORTS AND FOREIGN CARS SEE CHART

## CONSULT THIS CHART TO DETERMINE WHICH SETS FIT SPORTS CARS AND FOREIGN CARS

Sports & Foreign Cars

For Boats & Trucks


SETS For Domestic,

This chart shows a choice of sets to fit the electrical system of your car, the type of installation, and if trim plate is required. An X in the column headed "TRIM-PLATE" indicates an accessory plate is required. In column headed "TYPE INST."

A OR E = IN DASH, B = UNDERDASH, C = AGAINST FRONT DOOR, D=THROUGH GLOVE COMPARTMENT DOOR. \*= Dash requires simple alteration.

CAR MAKE AND MODEL	USE	TRIM PLATE	TYPE INST.	CAR MAKE AND MODEL	SET	PLATE	INST.
Alfa Romeo 1956-58	300X 600X	x	A.	Mercedes Benz 1957-58	300X 600X 8MX	×	Å.
Arnolt Bristal 1955-58	301X 600X	X	A.	Mercedes Benz 1958	300X 600X 8MX	X	A D
Austin 1956-58	301X 600X	X	A C	M.G.A. 1955-58	301X 600X	X	A.
BMW 1957-58 (Isetto 300) BMW 1958 (Isetto 600)	600X	X	C	M.G. Magnette 1957-58	301X 600X		A.
Borgword 1957-58	600X 8M	x	A.	Morris Minor 1956-58	301 X 600 X	X	A
Bristal 1957-58	301 X 600 X	X	B A*	Opel "Rekard" 1958 Panhard 1957-58	300X 8MX	X	À:
Citroen (1D-19) 1956-58 Citroen (DS-19) 1958	406 8M 406	X	8 D	Porsche "1600" 1957-58	406 VWA7	X	A.
D.K.W. 1956-58	406 VWA7	X	A	Porsche 1956-57	406 VWA7	X	Y.
ENGLISH FORDS Squire-Zephyr 1957-58	301 X		В	Renault Dauphine 1956-58	406 VWA7 8M	x	À:
Zodiac-Cansul 1957-58 Gagamobil 1958	600X 300X 600X	X	A:	Renault 4 CV 1956-58	406 VWA7 8M	X X	A:
Hillman Minx 1955-58	8MX 301X	X	A* B	Rover 1958 "1055" Triumph 1955-58	301X	X	D B
Hillman Husky 1955-58	600X	X	8 8	Triumph Sedon 1955-57	600X 301X	X	B
Jaguar (all) 1950-57	301 X 600 X	X	B	Voux Holl 1958	301X 600X	X	A.
Jaguer (1958)	301X 600X	x	BA	Volkswagen 1953-57	406 8M	X	V.
Jaguar (Mark VIII) 1958	301X 600X	x	B A	Volkswagen 1958	406 8M	X	¥.
Lloyd 1957 Mercedes Benz 1955-58	300X 600X	X	A.		VWA!	x	A
Mercedes Benz 1955-57	300X 8MX	X	A:	Volkswagen Ghia 1955-58	8M	X	V.
Mercedes Benz 1955-58	300X	x	¥:	Valkswagen 1955-58 Micro	VWA:		A E
	KOOX 8MX	x	A.	Valva 1957-58	8M	X	A

## BUICK - CHEVROLET - OLDSMOBILE - PONTIAC - VOLKSWAGEN



SPECIAL CUSTOM SERIES . TRANSISTOR POWERED

- . PUSH BUTTON TUNING

CUSTOM FITTED TO EACH CAR

Specifically designed to custam fit your car with simplest installation. Sensitive transistor powered circuit uses 5 tubes plus rectifier. Heavy duty 6" a 9" PM speaker, automotic volume control, and tone control. Law battery drain. For 12-volt aperation. Shpp. wt.,

On bottery drain. For 12-volt operation.

10 lbs.

CTA6X — For Chevrolet 55-56

CTA7X — For Chevrolet 57

CTA8X — For Chevrolet 58

CTA9X — For Chevrolet 58

BKA6X — For Buick 56

BKA7X — For Buick 57-58

BKA9X — For Buick 57-58

OEA7X — For Oldsmobile 59

PCA7X — For Oldsmobile 59

PCA7X — For Pontiac 57-58

VWA7\* — For Volkswagen 53 thru 59

\*Not transistorized — For 6 volts only. EACH 59.95

ONLY \$6.00 DOWN - 10 MONTHS TO PAY!

## MOTOROLA SPORTS CAR

SPORTS, TRUCKS, BOATS REG. VALUE



ONLY \$49.80

\$5.00 DOWN - \$5.00 MONTHLY

\$5.00 DOWN — \$5.00 MONTHLY

TRANSISTOR-POWERED CHASSIS

NO VIBRATOR—NO VIBRATOR NOISE

REVERSIBLE POLARITY PLUG

FOR NEW CARS, OLDER CARS, FOREIGN CARS, TRUCKS, BOATS

A really universal cor radio for all types of cars or boats with 12 volt electrical systems. Small—measures only 6½" vital to 2½" deep Features polarity reversal (by simply rotoling a plug) for cars with positive or nead (by simply rotoling a plug) for cars with positive or nead (by simply rotoling a plug) for cars with positive or nead (by simply rotoling a plug). Walls No need to reset volteronistics of the features include vernier funing and control when the features include vernier funing and control when the features include vernier funing and simply child look. Styling fits Into any interior for a custom-installed look. Shipping Wt., 7 lbs.

MOTOROLA 600X Cor Radio

FOR TRIM PLATES FOR SPORTS AND FOREIGN CARS SEE CHART ANY TYPE ..... 4.35

## NEW! MOTOROLA 2 TRANSISTOR MANUAL RADIO FOR 12 VOLT



\*FITS MOST CARS, SPORTS CARS, BOATS AND TRUCKS

Extremely compact and efficient set for in-dosh or under dash mounting in most cars as well as for specially positioned installations. Features circuit with 3 tubes nod 2 transistors, automatic volume with 3 tubes nod 2 transistors, automatic volume control. 5" Golden Voice specker, noise eliminating circuit and extremely low battery drain. Size 15% w x 2½" h x 7½" d. Less trim plate. Shipping weight, 6 lbs. For 12 volt Systems.

MODEL 300X for installations with negative 37.20 ground ...

MODEL 301X for installations with positive

FOR 6 VOLT SYSTEMS

Similar to 300X, but has 4 tubes and 2 transistors and is far 6 valt systems. Less trim plate. Shpg.

TRIMPLATES FOR ABOVE LARGE TRIMPLATE FOR UNDER DASH SMALL TRIMPLATE FOR IN-DASH

CUSTOM TRIMPLATE TYPE E CONSULT CHART FOR TRIM PLATES AND IN STALLATION IN FOREIGN AND SPORTS CARS.

## HI-FI REAR SEAT AUTO SPEAKER KITS

FEATURING 6x9 COAXIAL SPEAKER WITH TWIN TWEETERS Add Hi-Fi Listening to Your Car

Identical to SK-37 outo speaker kit shown on this page except has hi-fi 6" x 9" cook speaker instead of single-cone unit. Excellent for music layer who wants quality reproduction. Specify chrome or gold grille. Shop wt., 6 lbs.

FADER TYPE AUTO KIT Coaxiot speaker kit (same as 5K-77) with toder for Mexible control at both front seat and rear speakers and sound balancing. Specify chrome or gold grille. Shpg. wt., 6 lbs.

## TRANSISTOR POWER 'PHONE 2-Station Telephone System

## Lafayette Leads Again With This

New TRANSISTOR Development!

AVAILABLE FOR 'THE FIRST TIME—TRANSISTOR AMPLIFIED
TELEPHONE HANDSETSI

125 MILE RANGE ON A SINGLE PAIR OF WIRESI

EACH HANDSET HAS A COMPLETELY SELF-CONTAINED TRANSISTOR AMPLIFIER & BATTERY!

WORKS WITH STANDARD 'PENLIGHT'' CELLS—NO EXTERNAL BATTERY OR POWER SUPPLY USED OR NEEDED!

ANY NUMBER OF HANDSETS MAY BE USED IN A COMMON
TALKING SYSTEM!

TRANSISTOR

THE FIRST REALLY MODERN DEVELOPMENT IN INTERCOM.

MUNICATIONI

A revalutionary new development in telephone intercommunication, of extremely low cost, has been brought to you by Lafayette in these new transistarized telephone handsets. Each handset is complete with its own transistarized telephone handsets. Each handset is complete with its own transistar amplitier, buzzer, press-to-talk pursbutton switch, buzzer pushbutton switch, and shielded cailed card (extendable to 6') with male and female connectors ready to cannect to 2-wire coble. Each handset is handsomely styled in heavy, high impact resistance, moulded plastic and provided with a metal loop for hanging on the side of a desk, etc. To coll, simply press the red buzzer button and listen. Your party just depresses his press-to-talk button to talk, releases to listen. Voice comes through loud and clear, with a high degree of intelligibility. All stations are connected to the

ONLY


10 to talk, releases to listen. Voice comes through loud and clear, with a high degree of intelligibility. All stations are connected to the same 2-wire cable, and good signals can be received up to 125 miles with #22 wire! No externat power supply or bottlery are required everything is self-contained in each handset, and any number of handsets can be utilized. Buzzer tone is strewdriver-adjustable. Service is extremely simple, and bottlery replacement (a single Service is extremely simple, and bottlery replacement (a single Service is extremely simple, and bottlery replacement (a single Service is extremely simple, and bottlery replacement (a single Notice opprox. 2.44V. may; POWER OUTPUT 10 mw. (approx. +10 db.) max; MINIMUM POWER INPUT (SENSITIVITY).—0.002 mw. (approx. -27 db.); MAXIMUM LINE ATTENUATION -35 db. (0.175 db./km.); DISTANCE FOR COMMUNICATION-200 km. (125 miles); BUZZER FREQUENCY-400 cps.; BUZZER OUTPUT POWER-60 mw.; OPERATING TEMPERATURE—50° C. max.; POWER SUPPLY—Burgess "Z" or RCA VSO34 battery cell. SHIPPING WEIGHT (PER PAIR)-31/z lbs.

Net 29.95

PA-8—2-Station Transistor Telephone System (2 units)
PA-6 Single Transistor Telephone Unit Burgess Z or RCA VSO34—Replacement battery for above (1 per handset). Alpha 1172-2-wire cable for telephone systems, per 100'

BUZZER \_\_ Net 15.00 Net .08 Net 2.41

## REAR SEAT AUTO SPEAKER KITS



6" x 9" KIT WITH CHROME OR GOLD GRILLE Complete kit for adding second speaker in rear of your car. Includes a 6" x 9" PM speaker; 3-posttion selector switch for cutting in front, rear, or both speakers; diol plate with mounting bracket, knob, and hardware; chrome or gold grille; wire; and wiring instructions. Simple to install. Shpg. wt., 5 lbs.

5K-94 Speaker kit (specify chrome or gold grille)

DELUXE 6" x 9" KIT with 2.15 oz. ALNICO V MAGNET Some as above but with deluxe speaker with extra-heavy Africa V magnet (2.15 az.). This is some speaker used in kits selling at twice the price. Shop, wt., 5 lbs.

5K-37 Speaker kit (specify chrome or gold grille).  $\cdot 5^{\prime\prime} \times 7^{\prime\prime}$  KIT SK-42 Same as SK-94 but with 5" x 7" speaker and griffe (specify chrome or gold)

## FADER TYPE AUTO KITS

Rear-seat speaker kits identical to those above except with fader-type controls to cut either speaker in ar out or bolonce both. Shop, wt., 5 lbs. Specify chrome or

5K-95 6" x 9" kit. Some as SK-94 but with fader control

DELUXE 6" x 9" FADER KIT

Deluxe kit with extra-heavy-magnet 6" x 9" speaker, plus fader cantral. Specify chrome or gold grille.

SK-56 6" x 9" kit. Same as SK-37 but with fader Net 4.9"

## afayette's Breaking D. Summer Tool Sale



## FLEXIBLE SHAFT ATTACHMENT FOR ELECTRIC DRILLS

. DRILL WHEREVER TAKES UP TO

1/8" SIZE DRILLS

ables you to drill at any angle anywhere. Copacity up to "A" size drills; 36" overall length, with chuck. Comes in box with camplete instructions. Shpg wt., 1 lb.

## HANDY WARDING FILE SET



. O INDIVIDUAL FILES . SPECIAL STEEL-DEEP CUT-HARDWOOD HANDLES

## WATCHMAKERS PRECISION SCREWDRIVER SET

Hondy set at 6 precision screwdrivers with nickel-plated knurled handles, swivel heads and tem-pered steel blades. One each from No. 0 to 5— blade sizes: .025" to .100". In plastic kit. Shpg. wt., 3 oz.

HD-4444 Net .69



## Multi-Use WRENCH SET





Fully nickel plated—special analysis alloy tool steel. Heat treated and hardened. 16 sizes cover the most often encountered nuts in the automative TV-radio-appliance and hobby fields. Sizes range from 13/64" to 7/16". Set includes case with transparent cover. Shop, wt., 8 oz.

## 7-PIECE SUPER

NUT-DRIVER SET .99

Most popular socket sizes—polished, hardened steel detachable shofts. Plastic handle with precision clutch. Contains: 1—3/16" hex nut shaft, 1—1/32" hex nut shaft, 1—1/32" hex nut shaft, 1—1/16" hex nut shaft, 1—amber handle with chuck. HD-14-Shpg, wt., 2 lbs.



## JACOBS TYPE DRILL CHUCK

Comparable to Jacobs 18. Key type geared tooth chuck. Copacity 0.4%", thread 3%" a 24". Ruggedly constructed. tric drills. Made to rigid specifications. Compare our really low price. You'll find this same chuck selling for twice as much! Shag, yet. 11%.



## WOODWORKERS VISE

● 61/2" x 31/2" JAWS • OPENS TO 41/2"

A fine, practical tool for the

are of finely machined cold rollad steel. Gray iron jaws—foce ground and finished. "" diameter screw—o thread per inch. Saves time and labor—indispensable to the woodwarker. Perfectly balanced—designed for hard use.



## SWIVEL CLAMP-ON BENCH VISE

Constructed of high grade cast steel. 21/4" machined and polished steel jaws open to 21/4". Twin guide rods keep jaws aligned. Easy-turn swivel base allows unit to be swung instantly to any desired position. Shpg. wt., 31/4 lbs.

HD-107 Net 1.99





## HAND TAP SET

- · AMERICAN STANDARD THREAD
- MOST NEEDED SIZES
   RUGGED TAP WRENCH

Handy top set includes most aften used sizes. Cansists of 6-32, 8-32, 10-32, 3/16-24, and 1/4-20 taps, rugged tap wrench with T-bar handle, all in heavy plastic pouch. All threads are American Standard, Extremely useful for repair and servicemen. Shpg. wt., 1 lb. .Net .99

Vinyl Insulated "PROFESSIONAL" Pliers



**Tested Beyond Professional** Specifications

Professional quality—heavy duty—forged from special heat treated, alloy steel. Chrome plated to resist rust. Insu-lated with fitted, vinyl, non-slit handle grips—protects up to 10,000 volts. Hand hande cutting edges. Machine milled teeth. Handles shaped for easy grip and maximum teverage. Short fucture distance for greater gripping power. Uncanditionally guaranteed by Lafayette. Average Shop. wt. 10 az.

hD-350 6" Diagonal cutter-wire stripper
hD-351 6" Long nose-side cutter-wire stripper
hD-353 6" Electranic oblique cutter-wire stripper
hD-353 6" Long chain nose-side cutter-gripper
hD-354 7" Linesman's side cutters-beveled nase

## 1.69 7 in 1 HOLE SAW

Fits any electric drill, drill press, motor arbor, relary sander or lathe. Cyclindrical sow blades cut hales fram 1" to 2½" diameter in any ¾" stock. Hole sizes are 1", 1½", 1½", 2", 2½", 2½". True size carbon steel saw blades fit into deep machined grooves in tool head and are locked into place by a full length lack screw. Cuts wood, plastics, metals, sheet-rock, wall-board, masonite, formica, etc. Has guide bit and automatic stug ejector. Shipping wt., 1½ lbs.

## 5 PC. SCREW EXTRACTOR SET

Five piece, chrome vanadlum, screw extractor set. Removes broken and mutilated screws-balts—studs, even ½" and ½" pipe. Simply drill damaged screw-twist extractor in—and back screw aut. Set consists af 5 extractors in waaden case. Shpg. wt., 1 lb.


HD-273

1/2" CHUCK FOR 1/4" DRILLS



Converts %" electric drill to ½" copacity. Properly machined to insure carrect balance. May also be used on standard ½ x 24 motor arbor or shaft. Shpg. wt., 1 lb. HD-203.

## **NEW! PRUNING SAW**



2 lbs. MD=454 HD=453 Blade only, fits all 12" Mack saws HD=211 Heavy Duty Hack saw

## "RUBBERGRIP" SCREWDRIVER SET

- 4 Most Needed
- Screwdrivers
  Rubbergrip far Camfart

and Tarque
Rubber inlaid handles grant maximum comfart and maximum torque.
Can't bite into your hands no mather how hard you grip and turn.
Extra "Lift" impraves balance.
Blades ore hardened and tempered.
Plated to resist corrosion. Set contains 5" x 3/16 and 6" x 4" s standard drivers plus 3" x 3/16 ±11 and 4" x 16 ±2 recessed drivets. Shpg.
wt., 1 | b.


wf., 1 |1 HD-455



ASSORTED C FILE SET

8.

## "Tri-Y" Screwdriver Set



HD-457 Set at 2

95

Twa screwdrivers of unique design, Convenient—6 points on 2 tools. Utilitarian—the most aften needed standard and recessed blades. 
"Tri-Y" grip provides and recessed blades.
"Tri-Y" grip provides
extra leverage you can't
get from ordinary screwdrivers. Hardened and
tempered blades set in rugged, amberaid plas-tic. Shpg. Wt., 2 tbs. Net .98

A Camper's Hand Axe

Top quality, drop farged steel, one piece scaut axe. Perfectly balanced. Re-curved, shack absarbing handle. Air-cushianed rubber grip. Fully polished head and shoft. 24 az. weight, 13½" overall. With nail-puller. Fine steel can be sharpened to a "shaving" edge. Shpg. Wt., 2 lbs.

HD-461

Net 1.95



## WIRE STRIPPER-CUTTER

• Insulated Pandles


Tempered steel—handy—easy to use wire stripper. Pawl cam lock sets to wire gauge. Designed to fit your grip—uses minimum pressure. Specially ground cutting edges. Cuts and strips at any point along wire. For service or light production work. Shpg. wt., ½ lb.




## 1.20

A quality cutter for copper, brass, or aluminum tubing. Provides up to 1" capacity. Equipped with alloy steel cut-ting wheel and slide-lock reamer. Ideal for tight plumbing etc. Shpg. wt., 8 oz. HD-346

13 PC. TWIST DRILL SET



Set of 13 high quality chrome vanadium twist drills, complete with metal index. Sizes: 1/16" to "", by 64ths. Shpg, wt., 8 oz. HD-113 Net 1.29



## ROTARY RASP

3-Way Combo 98 Practical combination of hard

and soft faced hammer. Permonent standard hammer head on one side-interchangeable, soft-face rubber and plastic heads fit other side. Metal partion is chrome plated. Smooth resilient hardwood handle. Gwaronteed to became your most often used hammer. Shpg. wt., 2 lbs. Not. .98

## NEW! GLO-BRITE KRYLON

- . FLUORESCENT COLOR SPRAYI
- . GLOWS IN DAYLITE!

Far sure, quick attention. Makes only white surface up to 4 times brighter—easier to see. Gives nean effect under black light. Far do-it-yourselfers, display men, hunters, fishermen, compers, etc. Use on fishing lures, boot makings, life preservers, targets, auto bumpers, signs, displays, bicycles, etc. Numbers 3101 and 3102 are mode spec. MIL-P-21600 (AER). Used for oircraft wing tip and rudder markings. 16 az. push button cans.




Rod Orange—633 Yellaw Orange—634 Sunset Gald Leman Yellaw Cerise Green

## LIGHT WEIGHT LONG NOSE PLIER



## LOCKING PLI-RENCH



Super power lacking tambination pliers, wrench, clamp and vise. Grips objects of any shape. Easy to use—rugged —powerful tool. Exerts over 1,000 lbs. of pressure. Heat treated, drop forged jaws. Machine milled teeth. Unlimited uses as pipe wrench—lacking and adjustable wrench—clamp—vise—press—super pliers—etc. Length 10". Shpg. wt., 1 lb.
HD-120

## 20 PC. AUTO SOCKET SET



Ideal for auto or hame. Contains 8 regular 12-point sackets—7/16", ½", 9/16", %", 11/16", %", "A", and 15/16", ½" drive hex. L handle, 1 ratchet handle, 1 arive hea. I. nandle, i ratner nancie, i screwdriver adapter; also 7 ignition sade: ets—"%", 5/16", 11/32", %", 7/16", ½", and ½" internal knurled socket; %" drive hex. I. handle. All parts are praperly heat treated and nickel-plated Mounted in red wall bracket. Shpg. wt...

2.79 3 lbs. HD-446

## 20-PIECE TAP AND DIE SET



. NATIONAL COARSE SIZES Twenty of the most often needed taps and dies. Sizes popularly used in radio, habby, hame, shop and light industry. Contains one tap and one die in each of the fallowing sizes: 6-32, 8-32 10-74, 12-24, 1/g-20, 5/16-18, 3/g-10, 7/10-14, and 3/g-13. Includes die stock and adjustable tap wrench. Entire set contained in a fitted metal case. Shpg. wt. 4 lbs. wt. 4 lbs.

HD-252

## The "ULTRA" Electro-Tool Kit



- Technician in mind
- Professional **Quality Throughout**

needed tools

The finest-mast campact carefully selected tool kit we have ever affered. Each component tool chosen ta offer utility and quality. The "ULTRA" kit contains the following. 5 ½" insulated side cutters, 5" insulated chrome plated diagonals, 6" insulated chrome plated lang nase, 30 watt saldering from, 3 affset open-end wrenches covering from ½" to ½", 5" chrome plated weezers, shackproof amberoid chuck hondle, 3/32nd screw driver blade, 5/32nd screwdriver blade, "The recessed screwdriver blade, Pliers insulated far 10,000 valts, hand honed cutting edges. Side cutters have beveled nose, diagonals have provision for wire stripping, long nose has "wrench" grip iaws and cutters. The entire set is nested in a rippered, fitted, lined boak type carrying case with handle. Measures a scant 9" x 5" x 2". Shgg, wt., 2½ lbs.

Ratchet Head SOCKETOOL

2.25 Amazingly versatitel Handles carriage bolts, machine bolts, lag screws, sheet metal screws, machine strews, wood screws, cap screws—any style af head—slotted, recessed, square or hea. Operates in straight ar offset pasition—handly for hard-to reach places. Universal ratched head works right, left or locks—speeds and simplifies any jobl Contains Shelton suregrip ratchet handle; straight hex adapter; offset hex adapter; 5 hex sockets—7/16", "4", "5/16", tool steel screwdriver bit for slotted screws; tool steel screwdriver bit for recessed head (Phillips) screws. A fine small tool set, ruggedly constructed for hard usage. Complete in durable plastic case. Shpg. Wt., 1 lb. Ratchet Head SOCKETOOL

"5 in 1" BIG PAL • fisherman's Helper

Comprises 3 tools which compactly fold into one; "Dis-gorger"—backs-out hard la-reach hacks; "Stilleta"— cleans and removes leaders fram fly hook eyes; "Clipper"— cuts lines, leaders and trims flies and lures; "Screw-driver" and "Battle-and-Can apener" are also included in this trugged and versatilla tool. rugged and versatile tool. HD-452

"Little Smith" Anvil



"Little Smith" is the perfect componion for the hobbyist-tinkerer model maker-or just plain foolin' arounder. Measures only 4½" x 2½" x 2½" overall. Rugged enough for heavy pounding-sized right. Makes a perfect paper weight far the or desh. Shpg. wt., 2 lbs.

HD-460



SCREW-MATIC


SCREWDRIVER ATTACHMENT FOR ELECTRIC DRILLS

Can be fitted to any fixed ar portable drill, to drive up to ½" diamter was a series of the control of the cont

Net .98

## VALUES for HOME or SHOP

## WIN 'SOUPED UP' SABRE SAW



1/2 H.P. Motor - 1" Stroke LARGEST CUTTING CAPACITY • 6" 90° Cut-4" 45° Cut

LIST PRICE 44.95

16.95

RATED FULL 3.1 AMPS!

AND INSTALLATION.

● 1/8" JACOBS GEARED CHUCK

O DESIGNED FOR MAINTENANCE

THOR SPEEDWAY "30"-List 24.95

5.83

DRIVES HOLE SAWS UP TO 21/2 INCH

Bigger—more powerful—more versatile—faster cutting. Super-long blade easily cuts through 6" x 6" lumber. Cuts 4" x 4" at a 45° angle! Power enough to cut steel plate up to 3" thick—iron pipe up to 2" in diameter. Comfortable—conventional saw grip with auxillary knob far 2 hand contral. Saw tilts 45°—sale plate always remains flat. Finger control trigger-switch. Hardened gears and heavy duty raller and oil to bearings. Constant air stream flows dust fram line of cut. 3400 strokes per min., stroke length. Includes seven blades for cutting wood—steel—hardboard—sheet metal—pipe—leather—rubber—formica—etc. Rough cuts or fine scrall work. Equipped with rip guide and circle cutter guide, 8 ft. 3 cond cord and adaptor. 110 volts. 6 amp., AC-DC. 8" L x 7" W x 7"/s" M. Shpp., wt., 8"/s lbs.

WEN 909 List 44.95

Extra Blades for WEN 909, set of seven realecament blades. Show where the strong strong the strong strong strong the lates.

Extra Blades for WEN 909; Set of seven replacement blades. Shpg. wt., ½ ib.
WEN 900 List 3.40 Net 2.33

Wen "All Sow" Table: Canverts 909 Sobre Sow to Bench Sow, Highly versalile, Wen972 (list 14.95 Net 9.97


## THOR SPEEDWAY "20" 1/4" DRILL

- BALL THRUST BEARINGS
- GEARED CHUCK AND KEY
- HELICAL CUT GEARS

UL APPROVED 12.95

Musky—Low cost 1/4" geored chuck drill rated at a full 2.5 amps. Preferred and used by professional mechanics for many years. Built far cantinuous production an wood or merot. Powerful, UL approved, universal motor. 1/4" capacity in steel, 1/4" in hardwood. Ball ond self lubricality bronze bearings throughout. No load speed 2400 RPM. Strong, lightweight, cast aluminum alloy hausing. Specialty designed gear chain for greatest torque. Locking Trigger switch. Backed by Lafayette's famaus Maney Back Guarontee. Shpg. wt., 5½ lbs.
THOR SPEEDWAY "20"—List 18.95 Net 12.95

## **NEW! Electrostrip OUTLET** SYSTEM



SPEEDWAY "30"

3/8" DRILL



quickly- easily! No breaking into wallst

The most notable wiring development in years. Intended far use in cammercial, institutional, industrial, affice and residential occupancies. Quick-easy installation anywhere. On baseboard, workbench, walls, canniers—canducting or non-canducting surfaces. Hand forms to carners and irregularities. Eliminates extension cord dangers. No need for outlet planning—the outlets move as you choose. Permanent or temporary installations. Becomes a neat, attractive part of room decor—can be painted. Electrical connections where you want them—when you want them—along its entire length. Maximum sofety combined with accessibility. Will not support combustion. The four ft, its includes four ft, of strip, 3 receptacies, 2 and caps, 12" feed in card set and mounting screws. The 15 ft, kit includes 15 ft, of strip, teed in (outlet type), 4 receptacles, 2 and caps, 12" feed in (outlet type), 4 receptacles, 2 and caps, 12" feed in (outlet type), 4 receptacles, 2, and caps, 12" ft. kit—Shop, wt, 1" lbs.

Le-68 15 ft, kit—Shop, wt, 3" lbs.

Net 2.29
EL-69 Extra receptacle. Shop, wt, 3 azs.

NEW! THOR

THOR SPEEDWAY NEW! THOR

"14"SANDER

Here's Our Hot Sander Special



MOTOR DRIVEN -3450 RPMI SANDS-SMOOTHS BUFFS-POLISHES-RUBSI

PERFORMANCEL

USE SHEET OR FREE (WET) ABRASIVES!

Get this new top quality sander far all sanding uses. Here's an orbital matian, motor driven finishing sander (no load speed . . . 3450 RPM) that sands, smooths, buffs, polishes, or rubs with both sheet obrasives or wet (free) obrosives. Sanding area—4½" x 5½". Features all sealed ball bearings; direct-connected air-caoled mator. Rugged blue hammerlaid cost aluminum body. Hondy switch prevents accidental starting. UL approved. Use on 110-120V 60 cycle AC anly. Shpg. wt., 7 lbs.
THOR 14—List 23.95.

THOR	14 -List 23.95Net	15.50	
THOR	3509-Lambswool polishing padNet	.85	
THOR	S-106—18 sheets assarted sandpaperNet	.85	
			ė

## NEW MODEL 4100 VERSAMATIC



. WITH YANKEE STYLE BIT HOLDER

. TURNS 1/4" DRILL INTO HIGH POWER

TOOL REVERSES—INCREASES POWER—

REVERSES—INCREASES POWER—

REDUCES SPEED

Seven to one speed reduction develops tremendous torquel Hand clutch control for easy, instant step-steril action! Look at these fabulous features! Power screw driver—handles largest screws—reverses to extract them! Power drill topping head! Plenty of power for aversize drilling! Perfect for concrete or any kind of mosonry drilling! Low speed and high power for hole sow ettachments! A prafessional tool that anyone can uset Comes complete with screwdriver bit—Phillips bit—V<sub>A</sub> socket set adapter-wrench pin and instruction book. Shap. wt.,

HD-195 ... ... LIST 14.95 .... 1/2" CHUCK FOR VERSAMATIC

ared chuck-5/64" to 1/2" capacity—#33 taper to Supreme Versamatic. Shpg. wt., 1/2 tb. Net 7.38 HD-268



## VINYL PLASTIC ELECTRICAL TAPE GUARANTEED FIRST GRADE

• 60 FT. x 3/4" • .008 in. THICK

IN LOTS OF 24 . 10,900 V. BREAKDOWN

45¢

First quality, pressure sensitive polyvinyl chloride tope. Extremely high dielectric strength of 10,900V breakdown. Insulation resistance of one million megohms. Over 150% elongation at break. Excellent resistance against acids, alkalis, oils, sall water, etc. Tensile strength of 15 lbs. per In. High conformability: Forms tight, smooth protective wrop. Shop. wt., 6 oz.

HD-216—Plastic electrical tape, 60¢ per roll; in lats of 6, 50¢ per roll; in lats af 24, 45¢ per roll.



"VILLAGE BLACKSMITH" ANVIL

Here is workbench equipment Here is workbench eaupment lang workbench or rugged farmsize onvil. 8" long, 37/a" high and 3" wide
e. Finds hundreds of uses in metal work, woodtherwork, etc. Exclusively built for the home
hobbyists and formers. Shpg. wt., 8 lbs. Net 3.29

## Cordomatic HANDY LITE NEW LOW PRICE



Portable light and power
Lacks at any length of 20 ft.
Retracts automatically

Provides light and power up to 20 feet from installation. Swivels 180° when wall mounted—360° rotation when ceiling mounted. Detaches easily to change location. Simply have judy and plug it in Eliminates the inconvenience and hazards of tongled cards. U.L. approved. Shpg. wt., 5 tbs.

CORDOMATIC EXTENSION CABLE. Similar to obove, except terminates with a 3-way power tap instead of high fixture. Extremely versatile—use Indoors or out, U.L. approved. Shpg. wt., 4½ lbs.

## NEW Weller **Dual Heat Soldering Kit**

THOR SPEEDWAY

6.5 Amp. 1/2" DRILL

More power far service work-production lines-mechanics—or anyone requiring an extra heavy duty %" drill. %" capocity in steel—%" in hardwood. Sealed radial thrust ball bearing—other bearings cilite. 925 rpm na load speed, 610 rpm full load speed. Die-cast housing, steel gears, and specialty reinforced construction assure long life. Trigger switch with lacking pin. 6 ft. type SL UL approved cord, universal series wound AC-DC matar. For 110-120 volts, AC/DC. Overall length 8½". Shpg. wt., 6 lbs.


Instant switching to high or taw heot. Saves time — longer tip life. Instant heating clear to the tip. Prefocused spatight illuminates work, Guoranteed for one year. Kit includes dual heat, 90.125 watts soldering gun—solder—wire brush—soldering aid. U.L. approved. 110-120 V. AC only, Shpp. wt., 3 lbs. wt., 3 lbs. Weller 8200K List 7.95 .... Net 5.83

## ADEL Hand "Nibbling" Tool

Cuts any shape or opening by hand
 In sheet steel up to 18 gauge — In soft metals up to 1/16" thick.

Easily operated hand "Nibbler" cuts any shape hale in sheet steel—aluminum— 



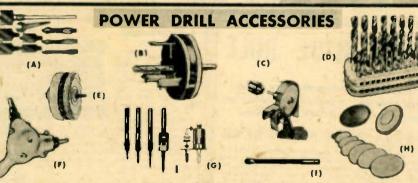

(C) Drill Mait Sharpener. Sharpens drills from 1-1/16" to 1 ½" size.

½" shaft fits only electric drill. Use it also to sharpen chitels, knives, scissors, wood bits, etc. Drill holder is factory preset. Adjustable tool rest. High grade, aluminous oxide-stone grinding wheel. Shpg. wt., ½ ibs.

Not 2.21

Not 2.31

Not 2.32

Not 2.32

Not 2.32

Not 2.33

Not 2.33

and 1\%". Fast, clean bore at any angle. Shpg. wt., 1 lb.

MD-181

(B) Adjustable Hole Saw: For \%" electric drill or drill press. Drills any diameter from 1\%" to 2\%". Max. depths of cut 1\%". Dlal indicator sets hole size without removal from chuck. Shpg. wt., 1\% lbs.

MD-257 .... List 6.95 .... Net 5.11

Not 7.29


(E) 4 pc. Utility Kit: Grinds, polishes, sharpens, cleans, finishes. Kit or contains 3" grinding wheel \%" thick this 3" double thick muslin buff, 3" wire wheel. Flonged arbor with \%" shank. All wheels have \%" bore. Shpg. wt., 1\% b

(G) Wood screw Countersunk set: 24 screw size and countersink combin-ations. Fits all drills and drill presses. Automatic stop for 3 depths. Bares far 8 most popular screw sizes from #6 x ½ to #12 x 1½". Shpg. wt., ½ lb. HD-337 Net 1.27

(H) SANDING AND POLISHING KIT Andy Sanding and POLISHING KII
Handy Sanding and polishing kit for
use with drill or drill press. Kit contains flexible rubber 5" backling disc 7 assarded sanding discs, 6" lambs
wool polishing bannet. Shpg. wt.,
1 lb. HD-270 Net 1.43

## **NEW! TUNGSTEN-CARBIDE**

Lifetime Sanding Accessories



Lifetime Sanding and Cutting Tools

Miracle Abrasive - harder than steel

Makes sandpaper obsolete

The amazing discavery of brazing tungsten carbide grits to steel makes pas-sible the finest sanding equipment ever known. Each grit becomes a sanding edge that performs perfectly and stays keen and sharp indefinitely . . . and

makes sandpaper absolete.
FOR USE ON WOOD, PLASTIC, PLASTER, WALLBOARD, ALL COM-POSITION MATERIALS

Eliminates forever the nuisance of stopping to change tarn or wornout sandpaper, Faster—easier—saves time, effort, and money. Discs for use with all standard power drills, sheets for use with all standard oscillating and orbital sanders. Avg. Shpg. wi., far discs & sheet—6 ass.

Sonding Discs and Sheets

TYPE	Fine Grit (150)	Med. Grit (80)	Coarse Grit	Net eo.
) 5" Sanding Disc	HO-429	HD-430	HD-431	.87
3) 35%" x 9" Sheet	HO-432	HD-433	HD-434	



RATED 3.1 AMPS . 3400 STROKES PER MINUTE

. TILTS TO 45°

15.98 

Special combination after—struct
HD.438
Universal Saber Saw Blades: Kit of 5 blades. Coarseuniversal Saw Blades: C medium-medium-fine-fine-and metal cutting. Fit better than 90% of all saber saws, such as Thor, Wen, Farsberg, Ram, Shopmote, Black and Desher, Craftsmen, Skil, etc.
High quality steel. Precision ground, filed and set. Shop.



## VERSA-VISE

TURN TO ANY

. USEFUL AS AN EXTRA

VERSA-VISE (D): All the features of a regular vise-plus locks in any position, just tighten jaws. Turns to any world position. Use standing or laid flat-turns 360° either world begin jaw surfaces—3½" x 2½"—plus remayable piper laws come 2000. iows. Jows open 5".

HD-282 Shpp. Wt., 17 lbs.
Right Angle Adopter: Adds bott adjustment for HD-283

## \*\*NEW Swingline \*\*101 Stapler Gun with 1,000 Staples

• High Compression Madel

Staples within 1/16" of corner 100% Jam Proof

 Open Channel Loading Open Channel Loading
Revolutionary, new staple gun with tremendous, pile driving oction. Delivers as much driving power os machines twice its size and weight. Highly maneuverable — perfectly balanced — extremely lightweight. All cose hardened steel construction. Rust proof, banderized finish. Na ailing required at any time. Uses two staples sizes — 4/16" and 5/16" — with no mechanical changes. Shpp. wt., 1½ lbs.

ND-322 List \$4.95.

Net \$3.99 HD-323 Pkg 1000 4/16" staples .4D HD-324 Pkg 1000 5/16" staples



SPRAVIT . COMPLETELY PORTABLE . NOT A FLIMSY

"VISRATOR" . FOR ALL PAINT-SPRAYING DUTIES

Here is a precision-built complete paint-sproyling autilimanufactured to the highest professional standards and yet priced for the hameowners. With integral V<sub>b</sub> H.P. motor campressor unit, not a vibrator. Now it's easy to do a professional-loaking paint job, 4 times faster than with a brush. Use it for other spraying or blowing duties too. Spray adjustable from a dime size to 10" wide. features on easy-to-use two-finger trigger gun; the body is guaranteed to be unbreakable. With 6 ft. cord, plug and 8 ft. of hose. Shps. wt., 15 lbs.

MD-415—List 39.95.

HD-415-List 39.95.

Page 33

## COMPARE! YOU CAN'T BEAT LAFAYETTES' WHOLESALE PRICES

VIEW .



NEW!

900X

The only Microscope in its class

featuring GRADE A optics!
Power Range 25X, 50X, 75X, 100X, 150X, 200X, 300X, 400X, 600X. 900X

Full Range Fine Adjustment · Safety Stop on Coarse Adjustment

.Net 34.50

F-338-List 69.95

## 800X "MICRO-SEARCH" **Laboratory Standard Microscope**

. RECENTLY DEVELOPED DESIGN

. INFINITE MICRO-METRIC SLOW MOTION ADJUST

. HUYGENIAN EYEPIECES -

ACHROMATIC OBJECTIVES . 100X-160X-200X-320X 500X-BOOX

A truly fine dry system microscope, suitable for a wide range of laboratory-professionol-and college use. Monocular tube of most recent, one piece, design. Spiral rock and pinion facusing mechanism. Coaxial, dual knob, coorse adjustment. Infinite micro-metric, fine adjustment: "Ti" shoped, dove tailed, slide, of improved design-automatic stop prevents over-rise. Square stage, 70mm X 75mm, with click stop, substage, diaphragm. 30mm plano-concave reflex micror. Paired, Huygens eyepieces of 10X and 16X. Three achromatic objectives of 10X, 20X and 50X. Refined, horseshoe design, base. Overall height 10". Gray sotin finish, chrome trimmed. Dave tailed, fitted cobinet of telected ook with rubber bumper feet and carrying handle. Shpg. wt., 7 lbs.



• Wide Field 3-Dimension View • Two Models SEMI-PRO "STEREO-SCOPE": An especially engineered instrument featuring the stereoscopsis and wide view field needed in biology — petrography — archeology — mineralogy — criminology — industry — agriculture — etc. Indispensible for inspection of large specimens — small parts — surface features of gross objects — dissection — etc. Fixed objective lenses and interchange-able eyepieces for a choice of either 30X or 50X. Prismatic binocular head with full interpupillary adjustment. Ground glass stage 3.3/16" x 3.5/16". Oversize modified horseshoe base. Rack and pinion focusing. Automatic stop prevents over rise. Overall height 9½". Complete with fitted wooden carrying case. Shpg. wt. 6 lbs.

STUDENT "STEREO-SCOPE": A 30X stereoscopic binocular microscope—designed primarily for the student and serious hobbyist, includes most of the features of our "Semi-Pro" model shown on this page. Fixed objective lenses and non-interchangeable eyepieces. All optics are achromatic. Ground glass stage measures 27/8" x 2-13/16". Overall height 734". Complete with fitted wooden carrying

F-335 ... Net 17.95



## "RESEARCHER" 1200X



8" TRIGONOMETRIC

SLIDE RULE

MAGNIFICATION RANGE 25X - 1200X

4 OBJECTIVES, 4 EYEPIECES,

• FULL RANGE FINE FOCUS ADJUSTMENT

FULLY CONTROLLED, INTEGRAL MECHANICAL MOVEABLE STAGE

FULLY CONROLLED, INTEGRAL MECHANICAL MOVEBLE STAGE

This superb instrument closely parallels the "Society" grade microscope in every desirable detail and yet is available at very low cost.

Pravides heavy, stable horseshoe base, smooth acting joint, enabling the body to turn through 60", perfectly balanced at any angle. Tube length is 140 mm. Four Huyghens eyepieces and four achtomatic objectives yield 16 combinations of power from 25% to 1200%. By means of two knurled micro-mation screws at the rear of the stage, it is possible for the operator to move the stage (and the slide) a distance of 3/16"-%", in any direction, while looking through the eyepiece. Hordware is of the finest quality. Tubes are of the highest grade chrome-plated bross. All fittings are expectly machined and threaded, making this scope suitable for the most exacting work. Scope comes with a set of 5 basic dissecting instruments, mode of high grade instrument steel. 10 slides, a pack of cover slips and a tube of maunting fluid. Includes dovetoiled wooden carrying case. Shipping etc., 10 bs. Net 44.50 Net 44.50

## Net 24.50

MICROSCOPE SLIDES PROFESSIONALLY PREPARED SPECIALLY SELECTED MICRO-SUBJECTS

. ADD TO THE ENJOYMENT OF YOUR MICROSCOPE

Specially selected slides of universal interest. Cerefully prepared—professional size. Set includes 12 prepared slides and slotted, covered box for filing and storing. Net 1.39 Net 1.39 Net 1.39 Net 1.39 Net 1.15 Net 1.39 Net 1.79 Net 1.59 Net 1.29

F-123—Ports of Insects
F-124—Spiders and Disease Carriers
F-125—Tiny Creatures found around House
F-126—Sea Life 128-Structure of Blood 130-Life cycle of Insects

F-131—Bacterio
F-132—Pond, Morsh and Sea Life, Plankton
F-134—Micro-Anlmols
F-135—Micro-Organisms
F-135—Substance of Cells
--Set of 6 slides

trig slide rule of laminated, selected bamboo. Face of

HUNTING WITH THE MICROSCOPE

.89

Specially designed for microscope Hluminotion. Provides a bright, evenly lighted field of view. Controlled intensity, by means of focus-oble cendenser lans. Lomp may be rolled or lowered to any desired height on its 4½ stanchion. Inclination and elevation joint permit swinging through 360° in beth horizontal and vertical plane. Fully adjustable for transparent or appages specimens, direct or indirect Illumination. Involuable where oblique light is necessary. Operate on 110-120 volts AC/DC. Lomp is easily replaced. Self contained switch, cord and pive. Lomp body is 5½ fong, stand is 5½ high including base. Ships. wt., 1 ib.

. USE WITH ANY MICROSCOPE

F-268.

Not 2.95



Gulde for beginners and advanced users of microscopes. How the microscope works. How to prepare and study cultures—set up a microscopic zoo and garden—grow micro organism—perform micro surgery. Profusely illustrated with photographs and drawings. 14 chapters of easy-to-read, highly informative text.

UTILITY DRAFTING SET

Mode in Germany of hord rolled, nickel ploted bross. All linstruments ore nested in a fitted, velvet lined cose. Contains three side wheel 3½" bow instruments—one a divider, one a pencil and one a pen. All have reversible needle point. 5½" composs with pen and pencil ports—and lengthening bor. 5½" divider with straightening device. 3" ruling pen. Extra handle for use with pen and pencil parts. Capsule with extra leads. Perfect for schools, labs, industrials or wherever precision drawing sets are used.

F-13

Net 2.59

. PORTABLE - MOTOR DRIVEN! . TIME SAVING - LIGHT WEIGHT -

CONVENIENT

NEW EDITION

BK-1440 136 PAGES 542" x 8"

· EXCEPTIONAL

VALUE

F-13

Net .89

2.59

Net 2.59

## TECHNICAL DRAFTING SET

Conter Wheel
 Adjustment

· Professional

· German

. A \$15.00 Value 5.95



A new set of imported nickel plated brass instruments priced far below the usual price for this quality. Contains this price price for this quality. Contains this price price

## afayette IMPORTED SLIDE



LIST \_6.00

2.89

LIST 25.00 • Machine Engraved Graduotions • Smooth Slider Action

• Extreme Dimensional Stability • Easily Read Groductions

 Soddle Leather Cose Modern Scole Arrangements

## 10" LOG LOG DUPLEX TRIG SLIDE RULE

10" Log Log Slide Rule: Constructed of specially selected, lominoted, non-hygroscopic bamboo. All scoles are machine engraved on white plastic in permanently accurate calibrations. Adjusting screws permit varying the tension on the slide. 21 scoles in all including the more frequently used tension on the slide. 21 scoles in all including the more frequently used collaborate and exponential problems. LLO and LLOO scoles refer to 8 scoles all offer scoles coordinate and refer to D scole. Scoles ore I, LLI, DF, CF, CT, C, D, LLS, LL2, LLO, LLOO, A, B, K, CI, C, D, S, SY and DF, CF, CT, CT, C, D, LL3, LL2, LLO, LLOO, A, B, K, CI, C, D, S, SY and T, Scale characteristics permit multiplication, division, proportion, inverse proportion, reciprocals, cotangents, squares, square roots, cubes, cube proportion, reciprocals, cotangents, squares, square roots, cubes, cube proportion roots of numbers less than 1, powers and roots of numbers less than 1, powers and roots of numbers less than 1, powers and roots of numbers in all basic fields science, engineering, production and ecanomics.

Shape wt., 1½ lbs.

F-341 LIST 25.00

## 5" POCKET SLIDE RULE

5" Packet Silde Rule: Convenient pocket sized slide rule of specially selected and treated bamboo. Will not worp, shrink or lengthen under varying almospheric canditions. A, B, Cl, C, D and K scales engroved on white plastic surface. Reverse side of slide has standard S, L and T scales. The upper, beveled edge of the rule is graduated in m/m to 13 cm. Other tedge is divided into 5 inches by 32nds. Only 5-13/16" long over all. Carried easily in any packet. Shpg. wt., 8 az.

F-340 LIST 6.00

. FINGER TIP CONTROL! • 4 ERASERS — 4 COLLETS — 2 BRUSHESI 4 ERASERS — 4 COLLETS — 2 BRUSHES!

The new, exclusive, Lofayetto bottery operated erasing machine is the most madern eraser available. Sleek and streamlined as a racket—erases fast as a jet. The entire unit has been designed for convenience—ease and speed in erasing. Bottery operation does away with bulky A.C. motors—trailing line cords—danger of shock. Sole enough for children to use. Entire unit—including bottery—weighs only 4 az. Fits the hand as noturally as a pen or pencil. Switch precisely located for finger-tip control. Per-mag motor ensures quiet—smooth running—vibration free operation. Permanently lubricated, precision bearings assure long, trouble free life. Includes four eraser cares. One safe—wo medium hard—one gritty—to caver all erasing problems. Two brushes—one saft—one stiff—for clean up, and four collets that accept both the eraser cores and brushes. Easily replaceable bottery is a No. 1 or "C" cell. Supplied with bottery. Shpg. wt., ½ tb.

NEW JET-E-RASE ELECTRIC ERASING MACHINE

F-424 Kit of two each, erosers and brushes



F-340





Makes Any Good Telescape Better!
Doubles Your Telescope's Power!
Improves Doffinition!
Provides Greater Eye Relief!
Greater Illumination—Wider Field!

The Barlaw Lens is a negative (diverging) lens which can increase the range of magnification of any given set of eyepieces. Greater eye relief is pravided—even on shart focal length eyepieces. Sharpens definition and reduces image deteriaration by permitting use of low-power eyepieces to achieve high magnification. This also provides far greater Illumination and or wider field. By Increasing the effective focal length of the ablective—and reducing its relative operture—it greatly reduces observations present in poorly corrected eyepieces. Ladoyette's Borlaw lens will make any good telescope perform like a much larger one. Fits all Lotayette telescopes except F-330 Explorer. Accepts eyepieces of 24.5mm (.97") O.D. and fits draw tubes of that size. Shop, wt., 1 lb.



## ACCESSORY EYEPIECES

Highly Corrected

• Hard Coated • 24.5 mm O.D.

• Finest Quality

donutactured to extremely class talerances by one of world's leading manufacturers of aptical eccessories. These oculars allow you to obtain maximum performance from your refractor or reflector. You can determine the magnification possible by dividing the focal length of the eyepiece into the focal length of the telescope objective lens. All are hard coated. The 24.5 mm

Stock	# Description Ne	t. ea.	Stock # Description Not	. 00
	4mm Orthoscopic	8.95	F-396 24-32 mm Combination	
F-392	6mm Huygenian-Mittenzwey	5.45	Kellner-Achromatic Huygenion	9.45
F-393	9mm Huygenian-Mittenzwey		F-397 22 mm Kellner	7.95
F-394	12.5 mm Huygenian-Mittenzwey	5.45	F-398 Sunglass-for above ocutors	1.25
	20 mm Huygens			1.25
			Coated Optics	

## 30x, 60mm SPOTTING SCOPE

A prismatic telescope using the same fine features as expensive binoculars! Field.of view is 85 feet at 1000 yds. Both front and rear optics are coated. High relative brilliance due to great 60mm objective lens. Exceptionally smail and light – weighs only 1½ lbs. including metal ripod! The perfect companion for shooting – hunting viewing – naturalists – and hobbyists. Comes equipped with 11½" tripod and mount and zippered leather carrying cose for both scope and tripod. Shpg. wt., 2½ lbs. F-149


## HARD MAPLE PANTOGRAPH

ENLARGES KEPRODUCES! . PRECISION

SUSPENDEDI 21" adjustable panta graph— 21 different ra-tios from 11/8" to 8. Enlarges, reduces or reproduces drawings -

sketches diagrams—
pictures—maps etc. Most ropid, accurate means of reducing or enlarging to scale. Lacquered highly finished bars are 21" long and 3/4" wide. Heavy metal standard, with bearing eliminates all friction. Chrame plated hordware—ratio thumb screws and nuts. Complete with lead, accessories and detailed instructions. Shpg. wt. 2 lbs. .Net 3.75

"draftette" DRAFTING MACHINE



Full 180° protroctor scole, finest aircraft aluminum with black satin finish. Engraved, white filled numbers and markings are machine calibrated to ± .0005 of an inch! Folds like a jacknife . slips into drawer or briefcase, eliminates clutter of T-square, ruler, protractor, triangles. Clamps to drawing board or sketch pod. Layout chassis, diagrams, sketches, design detail, surveys etc.

F-287 Draftette with 3 x 5" scale, shape, wt., 1 lb. List 4.95

Net 3.95

List 4.95 with 3 x 5" scale, shpg. wt., 1 lb.

Net 3.95
F-289 Draftette with 3 x 5" scale, attached to 11" x 17"
List 6.50
F-401 Draftette.

## OPTICAL MICROMETER

- · Pocket sized Comparator
- Measures Diameters-Radli-Angles

Radii-Angles

• Linear scale in Inches and Millimeters

High quality aptical micrometer using a triplet lens system of approximately 7 power. Triplet system affords a wide flat field of view. Extremely accurate reticle of etched glass. Unoffected by changes in temperature and humidity—impervious to ail, salvents and scratches. 0.5 inch linear scale callibrated to .005 inch. 10 mm scale callibrated to .2 mm. Hole diameters from 1/4 to 1/4 t



## Polaris

THE NEW Professionally Designed and Produced

2.4" EQUATORIAL REFRACTOR 800-mm. Focal Length
 62-mm. Objective

· Micromotion adjustments on both axes 

160x-88x-40x-22x with eyepieces included 200x\* by use of optional eyepiece

Jafayette's DIRECT IMPORTS

Make These Prices Possible

79.50

Only 7.95 Down

Latest in a long line of Lafayette refractors at reasonable prices. The unusual value of the Polaris, is recognizable in the following specifications. Objective: Fraunhofer-type achromat, hard coated, 62.5 mm., 800-mm. focal length. Collects about 75 times a much light as the naked eye, resolving power 2 seconds, faintest discernible star 10.7 magnitude. All eyepieces are hard-coated Huygenians. Eyepleces included: 160x (5-mm), 88x (9-mm), 40x (20-mm), 22x (35-mm).

Finder scope is 6x, 20 mm. Equatorial mount with slow-motion controls in right ascension and declination. Tripod head with latitude adjustment. Clamp lever for declination and Inclination. Accessories include sunglass, star diagonal, erecting prism, sun projection screen, field tripod, and wooden case. Magnifications of 100x, 88x, and 40x. Rack-and-pinlon focusing. Heavy plating used throughout to prevent rusting. Shipping wt. 30 lbs.

Shipped Via Express Only F342 Shpg. wt., 30 lbs. F391 \*200x obtainable by use of optional 6-mm Orthoscopic Eyepiece

## Galactic 3" Equatorial Refractor Sale! 189 00

RESEARCH QUALITY ● 910mm FOCAL LENGTH ● 76.2mm CLEAR APERTURE ● MICROMOTION CONTROLS FOR DECLINATION AND RIGHT ASCENSION ● RESOLVING POWER 1.6

. 1.6" FINDER SCOPE - SOO MM. FOCAL LENGTH

Truly superior quality—advances aesign—aptically and mechanically suitable far serious research. The objective lens is a 79mm, hard casted, oir spaced Fraunhafer achromot with a clear aperture of 76.2mm (3"). Focal length 910 mm, facal ratio 1/12, resolving power 1.6". Seven casted eyepieces provide magnifications of 227X, 152X, 101X, 73X, 45X, 35X plus 25X through the viewfinder. Facusing by means a micro-precise rack and pinion drive. The viewfinder scape has a 42mm (1.6 in. clear aperture) abjective—500mm facal length-rack and pinion facusing—and will accommodate various eyepieces. The equatorial mount is oversized—insuring stability and smooth action, finiely calibrated hour and declination circles far rapid finding and setting. Micro-motion and rapid motion controls are provided far both declination and right ascension. Micro-motion controls are fitted with flexible shalts and aversized knobs for ease of positioning while viewing. Body tube of white enameled aluminum for maximum strength with minimum weight. Accessaries include three sunglasses, managlass, two star diagonals, sun diagonal, erecting prism, sun projecting screen, extensible field tripad, chain brace, accessory shelf and waaden cabinet. Shaps. wt., 60 lbs. VIA EXPRESS ONLY.

8-384



18.95

COLLAPSIBLE ILLUMINATED



Collopsible lens pulls out, outomatically lighting flos Adaptifies work 5 times, Ideal for examination of tamps, etc. Size 41/2" x 1 1/2".

40			
Burgess Z	bottery (2	required for ob	ea .98 ea .85 ove) ea .08
Lots of 3			eo85
F-426			

## INDOOR-OUTDOOR THERMOMETER

Tell inside and outside temperature—instantly—from the comfort of your roam. Inside location—ideal far quick-easy reading. Dual tubes single scale for instant, visual composition. Plastic case with modern tapered lines. 8" x 2½" x 48" long copper capillary tube and bulb. Lorge scale numeral far ease of reading. No maving parts to become worn. Shpg. Wt. 1 lb.

1.321

Nat 2.29

ABNEY CLINOMETER

LEVEL



ONLY 2.95

A fine, fixed-facus illuminated magnifier — magnifies work 5 times. Field of vislan is 2" at 1½" working distance. Unlimited usage in industry—shap—habbies. For checking tools and dies—castings—forsings—welds—etc. Inspection of meter movements—fine soldering electronic repairs. Magnified area easily accessible through cut out invaluable in habbies such as stamp ar cain collecting, photography, entomology—mineralogy—etc. Excellent map reader. Campletely partable—uses two No. 2 cells for power. Weight ½ lbs., length 8½" averall. Shap. wt., 1½ lbs.

Planetoid 2.4" ALTAZIMUTH REFRACTOR **59**<sup>50</sup>

• 800-mm. Focal Length • 2.4" Objective Lens

Slow-motion controls

All-new 1958 version of Lafayette's famous 2.4" refracting telescope. A fine instrument for the amateur astronomer. Fully coated and corrected for coma and for spherical and chromatic aberration. Fork-type altazimuth mount has slow-motion controls for both altitude and azimuth. Focusing by means of drawduraluminum. Moving parts of heavily chrome-plated brass. Includes 5x 20-mm. focusing view finder with etched crosshairs. 4 coated eyepieces: 6 mm., 9 mm., 12-5 mm., 20 mm. Sunglass, erecting prism, star diagonal, wooden cabinet, tripod with chain brace. Objective lens 62 mm., focal length 800 mm. Shipping wt. 25 lts.

Shipped Via Express Only ... F391 \*4-mm Orthoscopic Eyepiece for 200x

Net 8.95

200x\* by use of

optional eyepiece

132x - 88x - 64x - 40x

with eyepieces.included

## DIRECT VISION PRECISION SPECTROSCOPE



• 400-800 MILLIMICRON SCALE

O ADJUSTABLE SLIT WIDTH: ORAWTUBE SLIT FOCUSING

O HORIZONTALLY SPLIT FIELD

A prismatic type, hand-held instrument that has most features of the finest standard laboratory instruments.

The millimicron scale is adjustable for sharp facus and for position (with "lack-in" feature to fix scale with relation to known spectral-lines). Highest grade aptics yields a broad dispersion field at high intensity obtained from best quality glass dispersing prisms, while excellent lens system resolves the closest spectral lines into 2 distinct lines. By a twist of the collar, a harizontally split field is obtained by which a comparison can be made of two light sources simultaneously. Tubes and collars are constructed of highly patished corrosion proof steel. Equally swited to laboratory or field work, the spectroscope has a wide array of applications: emission spectrum analysis of obsarption spectrum developments of the small test tubes provided. Absorption spectrum analysis has application in many branches of technology—color and dye chemistry, blood chemistry, clinical medicine, criminalogy. Camplete with plush-lined case, shipping wt., 1½ lbs.


Not 76 50

# A finely made surveying instrument of professional quality. Made entirely of brass. The Abney tagographic level enables the user to determine ground elevation—measures degrees of slape or inclination—run a level line—etc. Permits preliminarly surveying with little ar na experience. Fine prismatic system. Arc scale is divided into 60 degrees both sides of zero. Vernier scale reads 1 to 10 minutes. Arc swings fram 0 to 90 degrees. Used by formers—builders—gardeners—caretakers—maintenance mender. Particularly useful in laying aut drains—retaining walls and fences—driveways—fields—etc. Includes leather case and strap. Imparted to save you 50% of regular cast. Shpg. Wt. 3 lbs. Net 7.75

NEW Students Direct Vision Spectroscope

SIMPLEST WAY TO OBSERVE SPECTRA BETTER THAN ANY GRATING 'SCOPE OF EQUAL COST

HIGHEST GRADE OPTICS IN DIRECT VISION FIELD



Spectrum.

A broad dispersion field of high intensity is obtained from several dispersing prisms of matched glass, while a high grade optical system yields good resolution, sufficient to separate 5769.6A from 5790.6A in the spectrum of fluarescent lamp. The slit has adjustable width and can be focused sharply by means of on eye piece draw-tube, assuring easy viewing and establishment of Fraunhafer line of the Solar spectrum or bright lines of the emission spectra. Metal parts are made of highly polished carrasion-proof steel. Cames in plush-lined case. Shipping wt., 9 az.

## SUGAR REFRACTOMETER

MODIFIED ABBE DESIGN READS % SUGAR DIRECT NO MOVING PARTS TO

WEAR OUT

TO DETERMINE REFRACTIVE INDEX



Here is a beautifully constructed scientific tool of simple design, easy to aperate, with na maving parts, except for the facusing eye piece.

Operation is very simple. A few drops of the sample are placed an the prism, the cover is closed and abservation is made by means of tungsten illumination or daytight. A perfectly clear field, completely color corrected, shaws a reticle graduated in percent from 0.32%. With the sample in place as described above the field will show a sharp dividing line between a bright and dark partion; where the dividing line falls determines the reading, which can be estimated to 0.1% accuracy. The instrument can be converted to a universal laboratory type by changing % readings to "index of refraction" readings, No. (Consult Chemical Handboak or literature.)

This instrument is an essential tool in the fields of sugar refining, agricultural, food technology, medicine, thearestical chemistry, etc.

Net 29.50

## MAXIMUM-MINIMUM THERMOMETER 32.6

ar weather enthusiass-gardeners-farmers, etc. Gives tree readings at a glance — maximum, nsinimum and resent temperatures. Self-registering — no knobs — agnets — ar push buttans needed for reset. Magnifying ns temperature variations. Makes you the lacal weather spert. Shpp. wit., 1 lb.

Page 35

LAFAYETTE TELESCOPES ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38

## yette CAMERA DIVISION

presents PHOTOGRAPHIC SYSTEM VERSATILITY at LOW COST!



## RANGEFINDER 35'

5 ELEMENT F2.8 COATED LENS!

COUPLED RANGEFINDER

less only

BRILLIANT COMBINED VIEW-RANGE FINDER: 

SINGLE STROKE RAPID FILM
TRANSPORT! 

NINE SHUTTER SPEEDS TO 1/300! 

MXF SYNC-ALL SPEEDS —
ALL BULBS — PLUS STROBE! 

F2.8 45mm COATED LENS! 

HI-SPEED REWIND! STANDARD PC FLASH TERMINAL! J DOUBLE EXPOSURE PREVENTION! BUILT-IN SELF TIMER!

Losyette's autstanding camera valuel Precision-made to order for the camera fan who is a wise buyer. Check the features — then camuare tolayette's price with any other brond. Fast F2.8 coated anastigmat lens and extra-wide lens operture for brilliant, sharper full calar or black and white even in poor light. Sight and facus through cambined range-view finder, Fully synchronized at all speeds for class F, M and electronic flash. Speeds from 1 sec to 1/300th. Rapid advance sets shutter, counts exposure and ffrom sports film. Built-in delayed action time— automatic exposure counter and film stop. Hisspeed rewind with folding lever. Standard accessory shae on top-film type indicator. All metal body with brushed chrame trimblack leathereste covering. 20 or 36 exposures on black and white ar color 35mm film. PC flosh terminal. Shap, wt. 3 lbs. Use series 6 accessories.

35mm. PROJECTOR-VIEWER

• Projects Color Sildes

• Sharp-Brilliant-F3.5 Lens • Fast Change Slide Lever

Net Price

HOLDS 36 SLIDES © FAST SLIDE CHANGE LEVER Here is a lightweight ond compact 35 MM viewer that compares with models selling for more than twice the price! Precision mode . . . simple, fooling to construction. Use if as a table viewer with the self-contained 5½" square ground elass streen, or projection screen and enjoy on 10 sq. ft, pitch or projection screen and enjoy on 10 sq. ft, pitch with the same sharp facus. Magazine helds 36 stides that change with the Rick of a lever. Compact steel cose with carrying handle measures only 10" x 7" x 3½" deep. Supplied complete with standard 100-wait projection butb, F3.5 lens, projection mirror, view screen, on-off switch, line card and instructions. For 105-115 V. AC aperation.

F-276 - Shpg. wt., 5 lbs



NEW-BOOSTER EXPOSURE METER 6.95 WITH BOOSTER



Auxiliary lens pictured not included

ASA Scale—LVS Scale
 Stills or Movies Includes
 booster—Leather cases—
 neck card



Extremely versatile—extremely simple. Highly legible direct reading diol. Speeds from 4 sec. to 1/1000 sec. to F-349 List 11.95



New "SPEEDLITE" Electronic Photoflash operates on 110V AC or Midget Battery Pack

Designed by one of the foremost electronic flash engineers. More power—more practical features than any other unit in its price class. Thousands of flashes from one lifetime tube—pays for itself in savings on flash bubs—less than by cent per flash. Featherweight flash head weights only 16 axs. Entire unit—including bothery—only 2 lbs. 4 axs. Battery pack measures 5½" x 3" x 1½"—fits godget bag or packet. Coiled cord retry—only 2 lbs. 4 axs. Battery pack measures 5½" x 3" x 1½"—fits added bag or packet. Coiled cord sextends 3 ft. for off-comera or bounce flash. 15 ft. AC cord gives practically unlimited movement when extends 3 ft. for off-comera or bounce flash. 15 ft. AC cord gives practically unlimited movement when operating on AC. Universal bracket fits any comera with a tripad socket. Gun also mounts an side of particle pack. Light is color bolonced (6500° Kelvin) for color pictures without filters. Kodachrome guide particle pack. Light is color bolonced (6500° Kelvin) for color pictures without filters. Kodachrome guide 25—Tri-X guide 170. Recycles in 3 to 4 tecands. Speed 1/700 sec. flash duration. Gives soft, even, wide particle pack. I light in head indicates flash is ready to fite. "Gasy-off" clamp permits rapid off comera use. Socket on head for extension or multiple flash use. For any comera having X (zero delay, synchronization. Complete with battery, partable pack, 5 ft. coiled cord, shutte. cord, 15 ft. A.C. cord, synchronization. Complete with battery, partable pack. A bs.

Net 25.95

F-370 Bottery used in F-370 portable power pack. Burgess U160-List 7.95

## FOLDING BC FLASH GUN • FOLDS LIKE A FAN TO 4" x 2"1 • EFFICIENT B-C OPERATION!

PAN-HEAD TRIPOD

Brond new unique - pocket size - completely folding flash until at Lalayette's lamous low costl. Efficient 4½ flash until at Lalayette's lamous low costl. Efficient 4½ flash until at Lalayette's lamous low costl. Efficient 4½ flash possible flash to eliminate the specific combination for surefixe and it voltage. He of specific combination for surefixe and input build make the specific combination for surefixe and composition to establish the second conditions and conditions to second for PC fitting, ASA adopter and conditions: Ships, with 11b.

9-209 Complete with cost.

BATTERY for above, burgess U-15.

NEW "mini-pro" 2" x 2" 35 MM SLIDE PROJECTOR . COMPACT - ONLY 81/2" x 6" x 45/2" OVERALL BRIGHTER - SHARPER - EVEN IN LIGHTED ROOMS BO mm f/3.5 COATED
 3 ELEMENT LENS



• Fits camera accessory shae • ASA scale 6 to 3200

F-356-List 37.50

"35" CLIP-ON EXPOSURE METER

REGULARLY SALE PRICE

## ELEVATOR TRIPOD

• Folds to 16" including Pauheadl
• Extends to 47" PEUS 7" Elevator!

• Tri-Tilt head — Moves in 3 planes!

For any small camero — 35mm — reflex — or movie. Professional quality for professional results. Strong — steady — lightweight. Pencil slim, chrome ploted, bross leas. Lock securely in place — fold down read ity. Single action till-pan — and swing over for toking pictures in vertical or hartzantal format. Geored elevator centerpost with positive tack and folding crank. Weighs only 31 azs. All the most wanted features in one tripad. Shag. wt., 21/5 lbs. F-339 List 19.95

## 2x2 VIEWER

LARGEST PICTURE AREA OF ANY HAND VIEWER

SEMI-AUTOMATIC SLIDE CARRIER

9X AREA MAGNIFICATION The finest slide viewer available. Distartion free, aversize lenses give brilliant, uniform coverage. Largest picture area of any hand viewer for easy group viewing. Push button facusing, finger tip control. Semi-automatic slide carrier automatically activates light. Bullt-in tripod sacket for table top use. Shape, wt., 1 lb.

Not 7.95



35 mm Slide File

HOLDS UP TO 300 SLIDES Partable all steel 35mm silde file. Stare 150 2x2 glass slides or 300 2x2 cardboard slides. Includes index card, and numbered strips for quick, easy Identification. Metal handle and 2 snap catches. Finished in platinum gray enamel. Shpg. wt., 3 lbs. F-161.



**Polarizing Filter** 



FROM 6.44

Most effective polarizing screen and view combination. You see the exact polarizations needed for your pictures. Controls reflections from surfaces such as gloss, water, wood, etc. Yields spectocular sky effects. Use for fade in-fade out-lap dissolves. Threaded front and back for use with additional accessories. Supplied with pouch and complete instructions.

Net 6.44 BAG

1.69

& Viewer | PANHEAD





e LIGHTWEIGHT — STURDY — LOW COST

five section, chrome ploted, bross tripod. Extends to 45" telescopes
down to 121/5". Weighs only 20 ozs. Tension adjust screws for each leg
Camero retaining screw on panhead rolotes — makes turning camero
unnecessory. Pans and filts with a single motion. Handle is detachable.
Pons 300° — tilts 145°. A "must" to take the "jiggle" out of those
special shats. Shpg. wt., 2½ lbs. PRECISION 8mm MOVIE LENSES

FASTEST! FINEST! LOWEST PRICES! 11/2" f1.4 Telephoto

6.5mm f1.4 Wide Angle

11/2" f1.9 Telephoto

6.5mm f1.9 Wide Angle





Lafoyette—and only Lafayette—has these lenses at prices never before possible Now you can add that distant scene—those exciting close ups. Add unlimited versalitity to your movie comero. The finest coored optics are used throughout—fully color corrected. Fit all 8mm cameros with standard D mount such as Kadak, Keystone, Revere, Delur, Badex HB, etc. Sotin chrame finish. Removable lens haads. Keystone, Revere, Delur, Badex HB, etc. Sotin chrame finish. Removable lens haads. Accept standard fifters. Individual lenses camplete with teather cases. Sets are pocked in jewel type presentation case. Complete with lens caps. pocked in jewel type presentation case. Complete with lens caps. 11/3" f1.4 Telephoto: Fastest ovailable lens for 8mm. Exceptional speed—extreme thorpmens. Focuses 3½ ft. to Infinity. Click staps f1.4 to f16. 3x magnification. Selement lens. Focusing mount: Shop. wt., 1 lb.

Net 18.95
6.3mm f1.4 Wide Anglet Extreme wide angle. Covert A. 10.00.

5 element lens, roccusing page 18 p. 299—List 44.95
6.5mm 11.4 Wide Angle: Extreme wide ongle. Covers 4x oreo of normal lens.
Click stops 11.4 to 116. 8 element.
Click stops 11.4 to 116. 8 element.
Click stops 11.4 to 116. 8 element.
Net 24.55
refractors formulo. Focusing mount. Shaps. wt., 1 lb.
Refractors formulo. Focusing mount.

F-300—List 49.95
11/3" f1.9 Telephoto: Fost, sharp, fully coated. Click stops f1.9 to f16. Focuse
11/3" f1.9 Telephoto: Fost, sharp, fully coated. Click stops f1.9 to f16. Focuse
3.5 ft. to infinity. 3x magnification. 5 element systems. Focusing mount, Shpp. wt.

1 ib. 1302—List 38.95

5.302—List 38.95

6.5mm 11.9 Wide Angle: Covers 4x area of narmal iens. 8 element retrofacus

6.5mm 11.9 Wide Angle: Covers 4x area of narmal iens. 8 element retrofacus

6.5mm 11.9 Wide Angle: Covers 4x area of narmal iens. 8 element retrofacus

6.5mm 11.9 Wide Angle: Covers 4x area of narmal iens. 8 element retrofacus

Net 18.93
1.4 Motched Set: The finest available. Both f1.4 Telephoto and f1.4 Wide Angle
1.4 Motched Set: The finest available. Both f1.4 Telephoto and f1.4 Wide Angle
1.4 December 1.5 De



Makes silde viewing a pleasurel Versatile built in adoptor centers all slides for correct magnification. Transparencies are brilliantly illuminated and enlarged through a fine optically ground and polished lens. Electrically operated—equipped with bulb, socket, on-off switch, à ft, card and plug. All steel construction—finished in platinum area anamel. Shae wt 2 lbs.

Genuine pigskin—not plastic. Full 10 A 8" x 4". Holds your comero and oll accessories. 20" xipper top. Zipper pauch in lid holds filters, etc. Outside pouch with strop and buckle. All brass hordware. Loops and strops on bottom to hold tripad. Includes shoulder strop and pad. Shpp, wt., 1 tb.

F-320 List 8.95

Net 5.95

Net 5.95

Net 1.30

LEATHER GADGET

LAFAYETTE'S PHOTOGRAPHIC EQUIPMENT MAY BE PURCHASED ON LAFAYETTE'S EASY PAYMENT PLAN



## AUDIO OUTPUT VU LEVEL METER

A level meter for monaural systems, this unit is calibrated in Volume Units and percentages in accordance with standard VU meter practice. Precise domping enables quick and accurate indication of the average level of all non-sinusoidal audio signals. It has a maximum sensitivity of 1.2 valts for 0 VU indication, with a bullt-in 20 db attenuation control. This meter has countless uses, its 8300 ahm impedance being high enough not to load most circuits. It can be used for accurate level control of home hi-fl systems, especially where the amplifier feeds a remote loudspeaker, It is ideal as a consistently accurate recarding level indicator, it indicates proper level in PA, paging and commercial music distribution systems. Housed in a compact plostic case 4" x 2-3/16" x 1-3/8". Shpg. wt., 2 lbs.

TM-20-AUDIO OUTPUT LEVEL METER ....

## NEW! FAMOUS BRAND 2-STATION INTERCOM

- . ALL-METAL UNBREAKABLE CABINETS VERY SMART STYLING—FOR CHILD'S ROOM OR LIVING ROOM
- FOR 117 VOLTS AC OR DC
   SENSITIVE—PICKS UP SLIGHTEST
   SOUNDS AT A DISTANCE

- COMPLETE WITH 50' CABLE FOR HOME OR OFFICE
- DEAL BABY SITTER OR SICK ROOM WATCHER



Specially Priced At



"B" BATTERY ELIMINATOR AND CHARGER FOR PORTABLE RADIOS

2.95

Replaces all snop terminal 67% V. B. batteries. When Indoors vou can aperate set on regular 110V AC without using up your expensive "B" bottery. Also rejuvenates ald batteries for many extra hours of use. Camptete with AC card and plug. Fits in place of your battery. Size: 1%" x 2/3" x 1%". Shpg. wt., 1% ths. lbs. F195

Not 2.95



STRIPS

5TOCK NO. K1-18

NEW! LAFAYETTE'S MINIATURE HI-FI SPEAKER AND ENCLOSURE



## **Automatic Wire Stripper**

- "Delayed Action Return'
- Strips solid or stranded 4 hole precision ground blades Strips sizes 12 to 20



TOTALS

SHS WE



Automatic — efficient — easy to use. Strips insulation from all wires, 12 to 20, neatly ond quickly. Delayed return action prevents crushing fine wires. A real time saver for servicemen — electrical workers — production lines — etc. Narrow spaced handles for easy grip. Lightweight and easy action for less fatigue. No bother of changing blades or odjusting cutter for varying wire sizes.

45 97 per pr.

## Downl

	erate. Co install—v 6 lbs.	implete sys	item incl polproof.	udes Master Size of each	, Remo	ian op	d 50° c	able. Si	mple to	operate x 4". S	, easy t	. (	COMPL 50'	ETE W	ITH		HD-	349	ell built List \$8	for yes		rvice a	nd uni	form pe			wt., 1 1/4 lbsNet \$3Net
2			JSI	ETH	16	L	A	FA	YE	ET	TE	E YO	AS OUR CO	Y-	P	CUT	ALON	EN B DOT	TED LI	PL	AN	-	Red	Juli	res	only	10%
PRINTED U.S.A.	Lafay	4 Town-		-	=																PLEASE DO	Shipping Point			Zone Address	Please print clearly y	
Distribution of	iette K		Street Address		you hove me																STOCK NO.					your full name & address	65-08 Liber Jamaica 33,
	Radio			our pr	moved s																PAGE NO.					=	
	165 10			-	since yo																REQUIRED			Postal Zone		Dat	ew Av
PRICES	55-08. LIBI JAMAICA AXtel	Postal Mail Zor		oddress	your last				. 10												0344IHS	Stote		-			Avenue w York
PRICES SUBJECT TO CHANGE WITHOUT NOTICE	BERTY AVENUE % 33, N. Y. 1 1-7000	ConeState_		here.	order, please									N.							(Show			State	R.F.D. P.O. Box		
CHANGE WITH	NEW YORK 13, 100 6th Ave Worth 6 530				se write										41						DESCR Mfr's. Name	Best Woy	Freight     Air Exp.	□ Parcel Post □ Express	WE SHIP	Lafayette Catalog Number	express or freight F THERE IS NO EITHER WAY.
DUT NOTICE	N. Y.   BRONX 58, N. Y b.   542 E. Fordham f 10   FOrdham 7-881	THEY ARE SEN	SHPG. CHARGES FOR EASY	Pay order Check here	If this																IPTION Whenever Possible	Deposit	Boil C.O.D.	FILL IN AMOUNT	for Postage/ Charges. We re	YES C to us	cabines, antennas it. Express or Freigh AGENT IN YOU
	3	97	ä		-																			NT ENCL	Shipping efund un-	N O	and other lo t shipments are R TOWN, SEN
	NEWARK 2, N. J. 24 Central Ave. MArket 2-1661	TOTAL	Additional f Postage/Jhp Charges	Am't, for Sa Tax if any																	7	102				□ \$ □ ₹ \$ 8	Mode

FORN

EASY PAYMENT ORDERS-USE

INK-SEE

TeRMS: Our terms are cash. We shill counts have already been deducted in Standard equipment when rebuilt or ment specially built or ordered for payment should be sent with orders for

ship in

ol regulations on various of tems) when necessary to charges collect.

we ship

THEY ARE THE SAME

NOT

**USE** 

## FOR EASY PAY PURCHASE USE THIS SIDE AFTER FILLING IN MERCHANDISE ON REVERSE SIDE

## MINIMUM ORDER \$20.00 TOTAL CASH PRICE -DOWN PAYMENT 10% OR MORE, MINIMUM \$5

NOTICE TO THE BUYER: 1. Do not sign this agreement before you read it or if it cantains any blank space. 2. You are entitled to a completely filled in copy of this agreement. 3. Under the law, you have the right to pay off in advance the full amount due and under certain conditions to obtain a partial refund of the credit service charge.

Before filling out amounts see EASY PAY PLAN SCHEDULE and example, Figure your sums first on separate paper to avoid errors. USE INK. DO NOT ERASE OR

## RETAIL INSTALLMENT CONTRACT LAFAYETTE RADIO CORPORATION (SELLER) 165-08 LIBERTY AVE., JAMAICA 33, N.Y.

sells and buyer purchases merchandise as described on reverse side hereof to be kept in good repair and unencumbered at buyer's stated address. Seller shall retain title to and right to possession of merchandise until fully paid. Upon default of any payment or payments seller may declare entire unpaid balance due at once and may also repossess merchandise retaining previous payments as compensation for the use thereof. If proceeds of resale of merchandise are insufficient to cover buyer's obligation, buyer will pay the deficiency to seller; if proceeds result in overage, seller will pay such overage to buyer. Payments will be made to the place and/or to any party designated by the seller in writing.

LAFAYETTE	RADIO	CORPORATION	(SELLER)	

BUYER SIGN

CHARGES COLLECT: DO NOT INCLUDE SHIPPING CHARGES. RETAIL INSTALLMENT CONTRACT

EASY PAY ORDERS SENT SHIPPING

To fill in spaces below correctly refer to

EASY PAY PLAN Schedule on this sheet

Buyer's Copy Mailed-Date

(Please Print) Name.

Home Address

How Long At

This Address

and note example.

1. Total Cash Price

2. Sales Tax (if any)

3. Total (items 1+2)

(10% or more) \$5. Min.

(See EASY PAY Schedule)

(item 3 minus item 4)

6. Credit Service Charge

7. EASY PAY BALANCE

(Add items 5+6) Total EASY PAY Price

(Add items 3+6)

4. Down Payment

5. Unpaid Balance

Present

City\_

(L.S.) DATE

## "EASY PAY-PLAN" PAYMENT SCHEDULE

If Unpaid Balance is	Credit Service Charge	Monthly Payment	If Unpaid Balance is	Credit Service Charge	Monthi
15.00 - 25.00	2.50	5.00	100.01 - 110.00		10.00
25.01 - 30.00	3.00	5.00	110.01 - 120.00		10.00
30.01 - 35.00	3.50	5.00	120.01 - 130.00		10.00
35.01 - 40.00	4.00	5.00	130.01 - 140.00		11.00
40.01 - 50.00	5.00	5.00	140.01 - 150.00		12.00
50.01 - 60.00	6.00	6.00	150.01 - 160.00	16.00	12.00
60.01 - 70.00	7.00	7.00	160.01 - 180.00	18.00	13.00
70.01 - 80.00	8.00	7.00	180.01 - 200.00	20.00	14.00
80.01 - 90.00	9.00	8.00	200.01 - 225.00	22.50	15.00
90.01 - 100.00	10.00	9.00	225.01 - 250.00	25.00	16.00

ı	ii Unpaia	Cream	monthly
ı	Balance is	Service Charge	• Payment
ı	250.01 - 275.0	00 27.50	17.00
ı	275.01 - 300.0	00 30.00	19.00
ı	300.01 - 350.0	00 35.00	21.00
ı	350.01 - 400.0	00 40,00	24.00
Ì	400.01 - 450.0	00 45.00	27.00
	450.01 - 500.0	50.00	30.00
	On orders over	\$500.00, send do	wn payment
	of 10% or more.	Payments and a	redit service
	charge will be	in proportion	to amounts
	shave as ashed	lula	

For purpose of receiving credit for above EASY PAY PLAN purchase, the buyer makes the following representation:							
With Parer Wham Spour Living Alone	se Name and						
Address 📋	Permanent (Check Previous which)				ow ong (Years)	(Months)	
Age (Must Be Over 21)	Single Name of Married Spause	Spause Employed By	The second	(Address)		Salary	
Droft Classification	Reserve Status	Have you bought Yes [	On time Tes Payment? No	If yes, please giv Time Payment Acc	e your Lafayette ount Number, No.		
Real Estate Holdings—Ad	dress		Clty		State		
Recorded In Name of			Present Value S	N	lortgage \$		
Name Present Employer	If self-employed, so state	From The Control	Position Badge No.	Solory	How Leng (Years)	(Months)	
Business Address			Any Other Income	Source		•	
Name Former Employer				4	How Long (Years)	(Months)	
Bank Account With	Savings Checking [	(Addr	•15)	A BOOK TO			
First Trade Reference	H	' (Addr	•11)	Highest Credit \$	Still Owing \$	Monthly Payment \$	
Second Trade Reference	(Name)	(Address)	(City and State)	Highest Credit S	Still Owing \$	Monthly Payment \$	
Third Trade Reference	(Name)	(Address)	(City and State)	Highest Credit \$	Still Owing \$	Monthly Payment \$	
Nearest . Relative	(Name)	(Address)	(City and State)			1977	
	Name (DO NOT LIST THOSE	WITH WHOM YOU RESIDE)	Address		Relationship		

PAY

TERMS

PLAN

FOR OFFICE USE ONLY

State

Telephone

Balance

If Item (5) Unpaid

Item (6) Credit Service Charge

Item (7) EASY

PAY Balance

Your Monthly Payment

And your final Monthly

each month beginning one

month after shipment for

(See Schedule) is You will pay \$10.00

for 11 months or.

payment will be

and a final Monthly

Buyer agrees

payment of \$.

EXAMPLE-

=106.50

= 11.00

=117.50

10.00

110.00

7.50

Account Number

WINIWUW PAY Dr. H. Hirose a Tokyo Astronomical Observatory AVAILABLE ON Manabe

Navigators **Basic Aid for** 

Aeronautics Astronautics.

TIME C ZD m D \$100.00

and Marines.

4th Magnitude.

Adjustable

Orbits

Adjustable Satellite

Sun

and

80

Constellations—including

<u>=</u> by

1st,

3rd

Adjustable

Lunar orbital 2nd,

around Earth

Auto

Similar devices used

the

HE

UNITED

**AVAILABLE ONLY** STATES,

THROUGH LAFAYETTE IN

CANADA

go

Students S and Teachers 0 of Astronomy BE

S

PARENT

F8

IMPORTANT: Please sign this form before moiling. Be sure to give age. (Must be over 21).

## MORE LAFAYETTE SPECIAL VALUES!

NEW! A SCIENTIFIC INSTRUMENT FOR THE EXPERIMENTER ...

## NOVATRON

- . MINIATURE ATOM SMASHER
- PRODUCES 75,000 VOLTS
- ABSOLUTELY SAFE

COMPLETELY WIRED



or assembled. F-371 For 110V A-C Operation —Shpq. Wt. 3 lbs. Not 9.95

## LAFAYETTE PROFESSIONAL QUALITY COMMUNICATIONS RECEIVER - ENGINEERED

FOR THE AMATEUR Superheterodyne Circuit **Utilizing 8 Tubes** 

& Rectifier Tube

- BAND SPREAD FOR EASY TUNING • BUILT-IN "S" METER WITH ADJUSTMENT CONTROL
- EXCELLENT SELECTIVITY
- ACCESSORY POWER SOCKET PROVIDED
- ALL TRIMMERS PRE-ALIGNED
- COVERS 455KC. to 31MC. IN FOUR BANDS
- VARIABLE AVC-BFO AND RF GAIN CONTROLS
- BUILT IN PRE-CALIBRATED "S" METER
- SWITCHABLE AUTOMATIC NOISE LIMITER

HE-10 WIRED AND TESTED 79.95 8.00 Down

KT-200 IN KIT FORM 64.50

6.45 Dewn

High sensitivity superheterodyne circuit utilizes 8 miniature tubes plus rectifier tube and transformer input, full wave rectifier. The 80-40-20-15 and 10 meter amateur bands are clearly indicated an the illuminated dial face, and can be easily tuned with the pre-colibrated band spread. The receiver has complete band switching, thus eliminating the need for bothersome plug-in cails. Band spread is lold out an easy-to-read 0-100 scale, and features a weighted control knob which offers smooth, precise tuning. Coverage of from 455 KC to 31 MC is obtained through the use of four switchable ranges (455-1600 KC/1.6-4.8 MC/4.8-14.5 MC/10.5-31 MC). All controls, switches and phone lock are located on the front panel, while on optional accessory sacket delivering 360 valts DC and 6.3 valts AC is located in the rear of the receiver. Sensitivity is 13 microvalts (Signal to noise ratio is 20 D8 at 3.5 MC) Selectivity is —6008 at 1MC, image rejection is —4008 at 3MC, Panel is grey metal with white lettering, and cancils are block with aluminum trim. Hinged top makes inside of receiver readily accessible to operator. 7%" H x 15" W x 9" D. Shpg. wt., 22 lbs.

\*AT LAST - AN ACCURATE

LEVEL - AN INCLINE MEASURE ... AT A PRICE ANYONE CAN AFFORD -



INDUSTRIAL TIMER SWITCH

• 4000 WATT CAPACITY

• 4000 WATT CAPACITY

Turns equipment "on" and "off" operations a contract of the contract of t

MS-82. Model T -101

AUTOMATIC FIRE

ALARM

Accurate level and incline Measure One Man Can

TRANSIT

Do Any Levelling Job • A tool of a Thousand Uses with the control of the control HD-441 Corrying Cose for Hoppy Transit

NEW



If you park your car autiside in wet or wintry weather, you need Kar-Start. At instant of starting. Kar-Start sends five times the normal amount in the Kar-Start sends five times the normal amount in the Kar-Start sends for starting any in the starts. Used for starting any. It is a word in the starts. Used for starting any in the starts. Used for starting any in the start of the starting and th



TAPE RECORDER • 10 WATTS PUSH-PULL OUTPUT! • MFR'S GUARANTEED SPECSI
• RESPONSE 40-15,000 CPS + 3 DR AT 7.5 IPSI • DISTORTION LESS THAN 0.8%1 • WOW AND
PLUTTER BELOW 0.3% • SIMPLIFIED KEYBOARD CONTROL! • WEIGHS ONLY 18 LBS.!

MODEL T-1500 MI-FI TAPE RECORDER A really precision portable high fidelity recorder made by a formous manufacturer of precision aprics. This latest model T-1500 is made available, for the FIRST TIME AT THIS PRICE, BY measures 6½" x 10½" x 10½" x 11½". Takes per second), dual track—provides up to 4 hrs. of record or playback time, measures 6½" x 10½" x 11½". Takes reals up to 7½". Additional features of this auditanding recorder include: signal-to-noise rotal 48 bb. 2 special hum balance controls; "Bolanced Tone" high fidelity; exclusive high spead rewind lever; tape, 1 empty takeup real, radio-voltackment cord and hi-fi coble. For 110-120 volts, 60 cycles AC. Shap, wt., 21 bbs. SK-707 SIEREO KIT—In-line stereo head converts Model MODEL T-1515 STEREO MI-FI TAPE RECORDER

SK-707 STEREO KIT—in-line stereo head converts Model T-1500 for stereo playback. Includes stereo head, insulation, wrench, connecting cable and complete instructions. Shpg. wt., 1 lb.

Net 31.05

MODEL T-1515 STEREO HI-FI TAPE RECORDER Same features as Model T-1500 except with the addition of stereo head and a built-in second preamp. Shpg. wt., 24 lbs. WOLLENSAK T-1500—Reg. 229.50. Net 167.50

REG. VALUE 189.50 139.50 TF-401 EAR PHONE—Fils either ear. Low impedance.

Net 9.43

Net 9.43

REG. VALUE 189.50 139.50 TF-401 EAR PHONE—Fils either ear. Low impedance.

Net 9.43 ACCESSORIES FOR WOLLENSAK TAPE RECORDERS for Wollensak recarders

Net 4.75

TSC-405 CASE—genuine virgin vinyi, silip-over type case Net 4.75

Net 4.75

TF-908 MIXER-3 inputs, mikes, phanos or radios

FF-908 MIXER—3 inputs. Mixes ony combination of 3 mikes, phones or radios. Net 13.50 A196-2 MIKE EXTENSION CORD—15' with Wollensek plug and lock
A196-12 ATTACHMENT CORD — Connects re
phono or speaker to recorder

## "PRESENTATION" NEW LAFAYETTE'S

TRANSISTOR PORTABLE Complete with Leather Case, Earphone & Battery



- . PERFECT BACK TO SCHOOL GIFT
- EARPHONE JACK-BUILT IN-FOR PRIVATE LISTENING
- . ULTRA SMALL
- . PRINTED CIRCUIT . REFLEXED FOR ADDED GAIN

A highly sensitive, super-selective true packet transistar radio that will surprise you with its performance over the complete broadcast band. The low low Ladgogette price makes this a tremendous bargoin! Perfect for back to school gift, or to give to your best friends, relatives. Of course, the all-transister partable is your perfect companion during your travels, or just for quiet listening In the house. The circuit features reflex design for extra gain. Printed circuit construction offers trauble-free performance and extra long life. Handsomely encosed in a black molded case with golden grille and attractive windows for readings of volume level and tuning. Separate tuning and volume centrals adds flexibility and ease of aperation. Also provious a built-in PM speaker plus corphane lack, fertire stick antenno, and special tuning condenser. Single long-life 9 volt battery for economical service. Pluggin corphane cuts out built-in speaker for completely private listening. Complete with attractive, soft, leather case, on extra battery, and a sensitive high output, crystal earphane with sonitory plastic ear-insert and 3' flexible card. 3' transistors and diodes. Size: 3% x 2% x 1/3". Shaps. Wi., 1 lb.

## SPECIAL SALE! ON FINEST GRADE IMPORTED BINOCULARS!


Eoch of these extremely precise optical Instruments has a coact lens — clamped in (not just glued) prisms — lightweight alloy oil-metal bady — weatherproof, tearproof outer covering. Made to our own rigid specifications, Lofoysette's fonous to our own rigid specifications, Lofoysette's fonous money-back guarantee applies of oild single wheel and one adjustable experies, or so always! Focus: Either central focus (F.F.) by means individual focus: (I.F.) wherein both experies, or separately adjustable, Power, is number of times image is magnified. For example, 7XI/7 power] means the abject will oppear 7 times larger (or closer). Second number used (i.e., "50" in 7 X 50) is the diameter, in millicated lenses—tend to reduce reflection and pass up to 50%/more light than uncoacled lenses. "W.A. = Widenale, 10.1" of 1000 yards. † L.W. = Estro light weight.





## TINY 6-TRANSISTOR RADIO

PLENTY OF POWER IN THIS SMALL PACKAGE!!



- PUSH-PULL AUDIO OUTPUT FOR FAITHFUL TONE QUALITY
- EARPHONE JACK—BUILT IN—FOR PRIVATE LISTENING
- FULL TONE DYNAMIC SPEAKER
- . BUILT-IN FERRITE BAR ANTENNA
- TROUBLE-FREE PRINTED CIRCUIT
- SUPERHETERODYNE CIRCUIT
- HIGHLY STYLED PLASTIC CASE

ECONOMICAL—USES ONLY ONE BATTERY

REGULAR \$48.50 INCLUDING EARPHONE

BATTERY AND CARRYING CASE

Net 24.95

## **NEW! SENSITIVE** DYNAMIC EARPHONE SUPER VALUE

FOR TRANSISTOR RADIOS · ENJOY PRIVATE LISTENING OURABLE AND ATTRACTIVE

3-TRANSISTOR MINIATURIZED HEARING AID

afayette



FS- 200 "Tiny" 6-Transistor radio

HELP FOR THE HARD-OF-HEARING AT A PRICE TO SUIT ANY BUDGET!

6 TRANSISTOR

Now you can enjoy radio and TV programs, chats with friends and neighbors, church, the movies — because this efficient three-transistor hearing aid amplifies and improves the intelligibility of your world of sound.

• A convenient "on-off" switch and volume control permits adjustment to meet individual preferences and degrees of hearing impairment.

• This low, low price includes a miniature dynamic earphois fitted with two detachable rubber-covered earphuse of different sizes (to insure inclividual fit and maximum wearing comfort) and a three-foot cord of inconspicuous colorless plastic.

• A single, inexpensive "penlite" battery will operate this hearing aid for hours. Spare battery and zippered carrying case are supplied at no extra cost.

• 390 3-Transistor Hearing Aid — a \$50.00 value — now only

Extra battery for Above: Burgess Z or RCA VSO34

Net .08 ea.

**NEW! 4-TRANSISTOR MINIATURE** HEARING AID

Reg. 75-00

Lafayette Specia

True superhet circuit with push-pull audio output powers either the built-in dynamic speaker or the personal-type earphone. The trouble-free printed circuit utilizes six ultramodern transistors plus germanium diode. Built-in ferrite-rod antenna brings in distant stations like locals. Single long-life 9 volt battery for economical service. Uses standard Burgess 2U6 or RCA VS 312 replacements.

Housed in smartly designed black and white case of durable plastic with gold-toned speaker grille. Soft leather carrying case with attached earphone pouch. "On-off-volume" control plus stylized tuning dial. Coverage 530-1600 kc. Just 4¼" high x 2½" w x 1¼" thick and weighing a mere 12 ounces — a true purse/pocket portable. Lafayette "Tiny" 6-Transistor Radio — including battery, carrying case, and earphone for personal listening ... all at an unbelievably low price!

Net 24.95

INTERCOM AND ELECTRONIC BABY SITTER



4 TRANSISTORS . NO HUM. NO HEAT . NO SHOCK HAZARD PRINTED CIRCUIT BOARD . NO WARMUP DELAY . 3" SPEAKERS

NEW! LAFAYETTE 4 TRANSISTOR

. EXTRA SMALL . 1 THERMISTOR

Extra features ... top performance ... partability ... long bottery life ... ideal for home and affice. Perfect as a partable unit ... for the summer cattage ... backstage for ance-a-year amoteur theatricols ... as well as permanent installation ... office to office ... kitchen to bedroom. This is a complete transistor intercom system, consisting of a moster station and a remate station. Specialized circuitry allows each unit to call the other frenote can call the master even when it is turned off) while requiring only a 2-conductor wire for interconnection. Completely transistorized. Requires only 6 volts from built in, easily replaceable batteries for many months of reliable operation. Etimination of all power line connections prevents all shack hozard and makes this unit safe to use everywhere. Master station has a valume control and function switch with 3 positions. Talk, for specking to remote, listen, for monitaring the remate [baby sitting, etc.]; and standby which turns off the power to conserve batteries. Zero warmup time means the unit is ready for apperation. When the unit is turned off, the remate can call the master by depressing its call switch; a pleasant musical tane alerts the moster that it is being called. Trouble-free long-life printed circuit board, carrect amount of negative feedback, and push-pull output circuit. Big 3" speakers ore used for optimum naturalness and intelligibility. Each unit is housed in an attractive two-tone case, measuring 5 x 4% x 3%". Complete with cable and botteries. Shap. wt., 6 lbs.

# LIGHTWEIGHT AND POWERFUL—A REAL BOON TO THE HARD-OF HEARING • WEIGHS ONLY 5 OZ.—SMALLER THAN A PACK OF CIGAR-ETTES • USES ONLY 2 SMALL LOW-COST FLASHLIGHT CELLS • QUALITY AND PRECISION BUILT FOR YEARS OF OUTSTANDING PERFORMANCE • ECONOMICAL IN COST AND UPKEEP A completely self-contained madern hearing aid whose power and sensitivity will open up o new world for those with even severe hearing loss. Small enough to be cortied in a breast packet, it weighs only 5 oz. Complete with batteries. Only 2-3/16" wide x 2-13/16" long x 1/4" thick! It st-transistor circuit provides high amplification, good intelligibility and quiet operation. The tiny plugs at both ends. Internal electronic components are protected by a clear plastic cover which keeps the hearing ing aid dust and maisture free—while making inspection and service easy. A smoothly operating valume control permits easy adjustment for the various requirements of doily living. The olumite cose is extremely handsome and finished in gold by a special process to prevent peeling and rusting. A good-looking gray leather sipper carrying case is also supplied. Uses only 2 pen-fight battery cells, low-cost and replaceable onlywhere, yet battery life is approximately 2 months with a rate of use of 4 hours per day! Shgg, wt., 1 lb. Net 29.50

NEW LAFAYETTE "ANNOUNCEOCOM" 4-TRANSISTOR INTERCOM

PA-72. The moster unit is some as above, but the remote unit is hermetically sealed so that it can be placed outdoors. A push-button buzzer alerts the master inside the house, and intercomunication can proceed as described above. Net 24.95

24.95

LAFAYETTE RADIO

> 165-08 LIBERTY AVENUE, JAMAICA 33, N.Y.

BULK RATE U. S. POSTAGE PAID New York, N. Y.

Permit No. 8486

FANTASTIC SAVINGS! 62% OFF! FAMOUS GE GC-7 DIAMOND STEREO CARTRIDGE



F-360 -Heoring Aid.

Burgess Z or RCA VSO34 (2 required)...

REGULAR CATALOG

BATTERY FOR ABOVE

PRICE\_\$23.47

have the famous General diamond needle cartridges Electric magnetic GC7 (. backed up by both the GE tridge. Ideal as a replace- antees. ment cartridge, for conver- General Electric GC-7 1.7 sian to stereo—or at this low MILI Diamond Stereo Car-price, buy it as a spare car-tridge. Shpg. wt., 1 lb. tridge. Frequency response is

Lafayette shatters car- 20-17,000 cycles. Features tridge prices with this ste- high channel separation and reo buy of the year. For less excellent compliance with than the price of the dia- low record and stylus wear. mond needle alone you can These are genuine GE GC-7 MIL) diamond stereo car- and famous Lafayette guar-



HENRY WEITE NORTON RO-VERNON CENTER