

APRIL 1965 TWO SHILLINGS

tape recorder



ABC OF TAPE RECORDING - NEW SERIES FOR BEGINNERS
TAPING BIRD SONG — A VISIT TO GRUNDIG — TAPE RECORD REVIEWS



The same tape used for

Lord Jim



brings 'big picture' sound
to your tape recorder

You get professional sound from your tape recorder when you use Zonatape. It is the choice of many leading film makers and its latest success is in Lord Jim, this year's Royal Command Film. The film was written and directed by Richard Brooks, released by Columbia Pictures and stars Peter O'Toole as Lord Jim, James Mason, Curt Jurgens, Eli Wallach, Jack Hawkins and Paul Lukas; co-starring Akim Tamiroff and Daliah Lavi.

Zonatape comes in several grades and spool sizes. Double and triple play tapes are available and there is a full range of accessories including printed leader and timing tapes in five colours, splicing tapes and metal stop foil. You can get these professional quality tapes from all good class dealers, but in case of difficulty send to us for the name and address of your nearest Zonatape supplier.

ZONATAPE

(A PYRAL SA PROCESS)

ZONAL FILM (MAGNETIC COATINGS) LTD. *A subsidiary of*



The new symbol of
the Ilford Group


ILFORD Limited, Ilford, Essex.

E. Rorbaek Madsen
World famous authority and chief of
B & O's Electro-acoustic Laboratory
and Sound-film Division.




... when Quality is the First Consideration

Bang & Olufsen—a brilliant combination of advanced Danish Audio Engineering and modern Scandinavian design

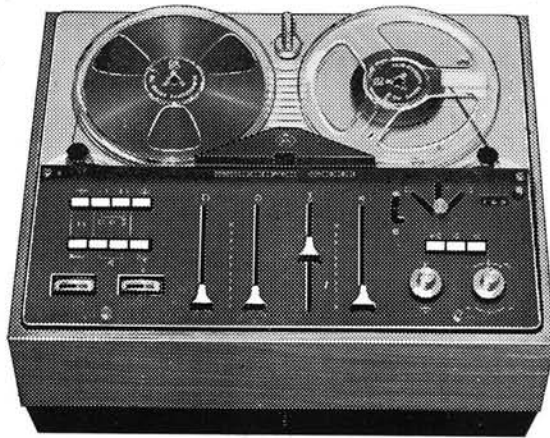

◀ **Beocord 2000 K**, prize-winner at the 1964 Hanover Fair, a Supreme example of B & O audio engineering. The first all-transistor hi-fi stereo tape recorder with a professional specification which has been acclaimed in international trade and tape-amateur circles for its carefully planned design, advanced features, and outstanding performance. The BEOCORD 2000 K is the ideal tape recorder for the enthusiast whose only interest is perfection. Available in a 2-track & a 4-track version. **112 gns.**

Beocord 2000 T—The Beocord 2000 is also available as a portable model with loudspeakers built into the lid and has exactly the same technical specifications as the Beocord 2000 K. The lid can be divided; each half forming one loudspeaker unit and giving a performance fully comparable with two stereo loudspeakers. This unit is ideally suited for the enthusiast who insists on the high quality performance of the Beocord tape recorder in a transportable version. Dimensions 10 $\frac{3}{4}$ " high (including speakers), 17 $\frac{3}{4}$ " wide, 14" deep. **Price 117 gns.**

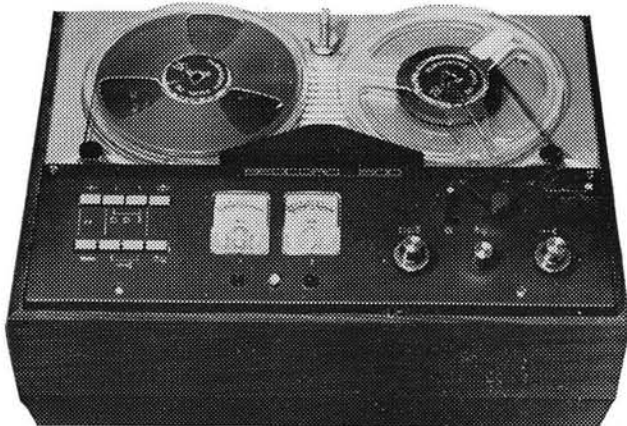

◀ **The Beocord 1500**—the very latest tape recorder from Bang and Olufsen. Based on the design of the Beocord 2000 this new tape recorder is technically identical but does not have mixing facilities or an output replay amplifier and is intended for the enthusiast who already owns a high quality hi-fi system yet desires the inherent qualities of the famous B & O Beocord 2000. The Beocord 1500 is available in a choice of Teak or Brazilian Rosewood finish. Dimensions 8 $\frac{1}{8}$ " high, 17 $\frac{3}{4}$ " wide, 14" deep. **Price 89 gns.**

Available only through appointed dealers of quality, Bang & Olufsen products are on permanent exhibition at our new London Showroom, 70/71 Welbeck Street, London, W.1.

BANG & OLUFSEN U.K. SALES DIVISION

A division of Debenhams Electrical & Radio Distribution Co. Ltd.

EASTBROOK ROAD, EASTERN AVENUE, GLOUCESTER. Telephone GLOUCESTER 25634.

Northern Ireland Distributor: Messrs. Solomon & Peres Limited, Belfast 1.

Distributor for Scotland: Bryterlite Electrical Co. (Glasgow) Limited, Glasgow, C.2.





Akai 345 Designed for the perfectionist. The most expensive in the Akai range, the 345 is produced for the discerning and demanding amateur/professional. Every possible feature is included making this the most advanced model for the recording enthusiast. It offers every possible Akai feature including:— exclusive cross field head/three independent hysteresis wound motors/three independent heads, erase, record, play recording monitor/Dual stabilizer giving constant tape speed/Automatic reverse/Auto repeat/Auto shut off/ Provision for remote control/Dual self contained speakers/ professional VU meters/Vertical or Horizontal operation/All mains voltage selector/Tape speed $3\frac{3}{4}$ " and $7\frac{1}{2}$ " per second/ Price **225 gns.**



Akai M8 For the enthusiast wishing to achieve professional standards in recording, the M8 offers fantastic performance at a realistic price. This machine can do everything that the professional machine can do, and has these exciting features:— Cross field head/vertical centre speakers/sound on sound/ two speed synchronous motor/unique cooling system/built in tape cleaner to eliminate hiss/3 speeds/4 track stereo-mono/2 large VU meters/automatic stop and complete shut off/Price **151 gns.**



Akai X-4 Unique in every way, this new world-leader portable (Weighs only $12\frac{1}{2}$ lbs) gives true Hi-Fi quality. Never before has such a machine been available, gives over 6 hours playing time on its own batteries, which can be charged from the mains. Delivered complete with two microphones and charging unit, it offers all these exciting Akai features:— completely transistorised 6 hours running time on internal battery/rechargeable on any AC mains voltage/4 speeds $\frac{1}{8}$ ", $1\frac{7}{8}$ ", $3\frac{3}{4}$ ", $7\frac{1}{2}$ " IPS/16 hours playing time available with 5" tape/4 track stereo/mono/exclusive Akai cross field head/ price to include 2 microphones, batteries and battery charging unit which will operate on all A.C. voltages/ Price **135 gns.**



Akai 44s Ruggedly built, competitively priced. For the enthusiast who demands quality, top engineering with rugged construction. This superbly built machine with exceptional value offers the following Akai quality features:— Precision Micro-gap head giving superb performance at $1\frac{7}{8}$ " IPS/Vertical or horizontal use/3 speeds, $7\frac{1}{2}$ ", $3\frac{3}{4}$ ", $1\frac{7}{8}$ " IPS/ 2 illuminated VU meters/all metal case/powerful stereo main amplifier/automatic stop control/provision for stereo headphones/special ventilation device/Price **110 gns.**

The Crossfield Head is undoubtedly one of the greatest single developments since the inception of magnetic recording systems. The bias current normally fed to the recording head to eliminate background noise partially erases the higher frequencies in the recording signal. The Crossfield System feeds the bias current to a separate head placed before and on the opposite side to the recording head in such a way that the bias current can no longer interfere with the recording head. The normal maximum audio frequency at one centimetre per second tape speed is 790 c.p.s. The Crossfield Head system for the same speed makes possible a signal frequency of 2750 c.p.s.

AKAI quality tape recording equipment is now available in this country. Substantial orders have been placed for their exciting 1965 range, to give immediate delivery from stock. Every machine will be tested before delivery and offers the enthusiast the highest possible standards in precision built tape recording equipment.



RANK Organisation's subsidiary Company Pullin Photographic Limited, will be fully backing the new Akai range of tape recording equipment with publicity in trade magazines, point of sale material and selected audience demonstrations throughout the country.

SERVICE facilities will be of the highest standard and carried out quickly and efficiently by skilled Rank technicians at their Servicing Department, 52a Goldhawk Road, Shepherds Bush



Servicing Enquiries—
Write or telephone
Pullin Photographic Limited
52A Goldhawk Road,
Shepherds Bush.

For further information write or telephone
Pullin Photographic Limited
11 Aintree Road Perivale Middlesex
Alperton 1541.
A Company Within the Rank Organisation

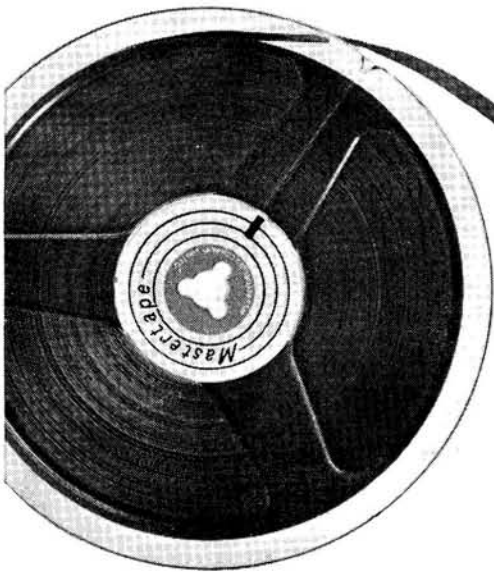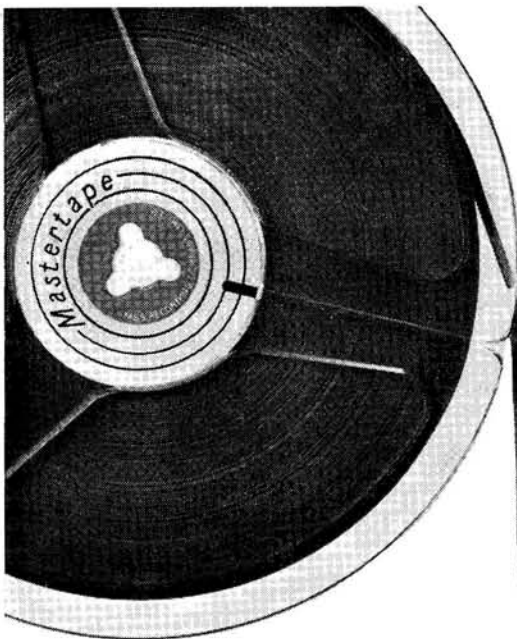

YOU GET
**MORE
 FOR
 YOUR
 MONEY**
 WITH
**TRIPLE
 PLAY**

MASTERTAPE

30 years' experience plus modern research and technical efficiency enable us to offer high grade triple play tape at a price little higher than double play. No special coating is used so that compatibility with existing ranges is assured. The super thin coating necessary for triple play tape is applied by our specially developed technique and as with other Mastertapes the coating is super calendered for long life and low friction.

Compare our prices with those of any other manufacturer and you will see the difference.

3"	600 feet	21/6	4"	900 feet	27/-
5"	1800 feet	51/-	5½"	2400 feet	66/-
7"		3600 feet	99/-		

Mastertape—without doubt the lowest cost high grade tape available today!

Full range of Standard, Long and Double Play tape also available at realistic prices—compare these examples for the most popular sizes:


5½" 900 ft. Standard Play (P.V.C.) 20/-	5½" 1200 ft. Long Play (P.V.C.) 25/-
7" 2400 ft. Double Play (Polyester) 55/-	



Nationally distributed by
VIDOR and available at
 your Local Radio Shop.

FIDELITY, WYNDSOR AND OTHER FAMOUS MAKERS FIT MASTERTAPE!


Manufactured in England by M.S.S. Recording Company Ltd. Colnbrook, Slough, Bucks. Tel: Colnbrook 2431 (8 lines)



TA-IS

TAPE AMPLIFIER UNITS

Models TA-IM and TA-IS
The monophonic version (TA-IM) can be modified to the stereo version (TA-IS) by modification kit (TA-IC). Special features include the provision of a bias level control, easy-to-read thermometer-type recording level indicators; large printed circuit boards. Both models have identical presentation. TA-IM £19.18.0 kit TA-IS £25.10.0 kit TA-IC £6.15.0 kit TA-IM £28.18.0 Assembled TA-IS £35.18.0 Assembled



TRUVOX D93 TAPE DECKS

Standard. High-quality stereo tape decks. D93/2 4-track for highest fidelity. £36.15.0 With TA-IM £52.18.0 With TA-IS £58.10.0

D93/4, 4-track, for most economical use of tape. £36.15.0. With TA-IS £58.10.0

TO ALL MUSIC LOVERS AND HI-FI ENTHUSIASTS

No electronic or soldering experience is necessary to build any Heathkit model: our simple, well illustrated manual guides you step by step. A FREE CATALOGUE of the full range, and detailed specifications of any item, will be gladly sent on request without obligation on your part.



"OXFORD" TRANSISTOR RADIO Model UXR-2. Luxury solid leather case, full long and medium wave coverage. Printed circuit facilitates assembly. 7" x 4". high-flux speaker. Send for full details. £14.18.0 incl. P.T.



UMC-1

MONO CONTROL UNIT. Model UMC-1. Designed to operate with our model MA-12 or any amplifier requiring 0.25 V or less for full output. Suitable for cabinet mounting or free standing. Size 10" x 7" x 4". £9.12.6 kit £13.12.6 Assembled



MFS

"COTSWOLD" MFS SPEAKER SYSTEM
A minimum floor space model. Size 36in. high x 16½in. wide x 14½in. deep with performance similar to the standard model. Specially designed for small rooms.

"COTSWOLD" STANDARD SPEAKER SYSTEM
This is an acoustically designed enclosure 26in. x 23in. x 14in. housing a 12in. bass speaker with 2in. speech coil, elliptical mid-range speaker and a pressure unit to cover the full frequency range of 30-20,000 c/s. Capable of doing justice to the finest programme source. Delivered complete with speakers, cross-over unit, level control, grille cloth, etc. Either Model £23.4.0 kit £30.15.0 (Assembled in the white)

POWER AMPLIFIER 12-WATT Model MA-12. 0.1% THD at 10W. Wide frequency range. Ideal for use with USC-1 and UMC-1. £11.18.0 kit £15.18.0 Assembled

COLLARO "STUDIO" TAPE DECK

Operating speeds: 1½in., 3½in. and 7½in. p.s. Wow and flutter not greater than 0.15% at 7½in. p.s. With TA-IM £31.5.6



Save Money and enjoy yourself building these Heathkit models

NO SPECIAL EQUIPMENT OR PREVIOUS EXPERIENCE NECESSARY TO BUILD ANY HEATHKIT MODEL

STEREO CONTROL UNIT Model USC-1



Push-button selection, accurately matched ganged controls to — 1dB. Negative feedback, rumble and variable low-pass filters. Printed circuit boards. Accepts inputs from most tape heads and any stereo or mono pick-up. £19.10.0 kit

£26.10.0 Assembled
GARRARD AUTO/RECORD PLAYER Model AT-6. 4-speed stereo and mono unit, manual or automatic record selection, Ronette 105 cartridge. £13.12.1 With Decca Deram cartridge £14.6.1
GOLDRING-LENCO TRANSCRIPTION RECORD PLAYER Model G.L.58. Fitted with the G.60 pick-up arm it has infinitely variable speed adjustment between 33½ and 80 r.p.m. and four fixed speeds, 3½lb. turntable to reduce rumble "wow" and "flutter". With Ronette 105. £20.1.3

HI-FI FM TUNER, Model FM-4U
For your convenience, this model is available in two units sold separately: Tuning Unit (FMT-4U—£2.15.0 including P.T.) with 10.7 Mc/s I.F. output, and Amplifier Unit (FMA-4U—£13.3.0). Built-in power supply; 7 valves. Total £15.18.0 kit



MALVERN

HI-FI EQUIPMENT CABINETS
A range of over a dozen equipment cabinets is now available to meet differing needs of enthusiasts. Designed for maximum operating convenience or for where room space is an over-riding consideration, this range includes kits, ready assembled cabinets or assembled and fully furnished cabinets, and has at least one model to meet your requirements. Why not send for full details? Prices from £7.7.0—£33.12.0

HI-FI MONO AMPLIFIER. Model MA-5. A general purpose 5 w. amplifier with inputs for Gram., Radio. Presentation similar to S-33. £15.10.0 Assembled £10.19.6 kit

AM/FM TUNER. Model AFM-1.

This model is available in two units sold separately. Tuning heart (AFM TI £4.13.6 incl. P.T.) IF Amplifier (AFM-AI £21.16.6) range 88-108 Mc/s (FM) 16-50, 200-550, 900-2000 (AM). Printed circuit board. Total price £26.10.0 kit.

HI-FI STEREO 6-WATT AMPLIFIER Model S-33. Attractively styled. Printed circuit construction. 0.3% distortion at 2½ W/chal.; sensitivity 200 mV. ganged controls; low cost, compact unit for smaller rooms. £13.7.6 kit

£18.18.0 Assembled
DE LUXE STEREO AMPLIFIER Model S-33H. De luxe version of S-33 with many refinements. Ideal for use with Decca Deram pick-up. £15.17.6 kit £21.7.6 Assembled



AUDIO SIGNAL GENERATOR Model AG-9U. Delivers up to 10 volts pure sine-wave (less than 0.1% distortion, 20 c/s to 20 kc/s). Decade switch-selected frequencies from 10 to 100,000 c/s. Internal 600 Ohm N/I load, or external. £30.10.0 Assembled £22.10.0 kit
AUDIO SINE SQUARE WAVE GENERATOR AO-1U. Covers 20 c/s—150 kc/s in four ranges. Choice of sine or square waves, the latter up to 50 kc/s. £21.5.0 Assembled £14.15.0 kit
SUGDEN MOTOR UNIT "CONNOISSEUR CRAFTSMAN". Heavy duty motor operating at 33½ and 45 r.p.m. Very heavy 12 in. turn-table. Virtually no rumble. £17.2.11

HI-FI STEREO 18 WATT AMPLIFIER Model S-99. Within its power rating, this is the finest stereo amplifier available, regardless of price. Printed circuit board construction; ganged controls. U/L push-pull output. 0.2% distn. at 9 W/chal. £27.19.6 kit £37.19.6 Assembled



TRANSISTORISED TELEPHONE AMPLIFIER. Model TTA-1. Provides instant group listening and conversation. Freely portable for use with any telephone; hands-free operation; automatic switch; 9v battery operated; compact and neat cabinet. £11.15.0 Assembled £7.9.6 kit

HI-FI SPEAKER SYSTEM Model SSU-1.

This kit is easily assembled. It contains two speakers and balance control in its ducted port reflex cabinet. It is equally suitable for stereo or mono in average room. (Legs 14/6) Less legs, £10.17.6



ELECTRONIC WORKSHOP KIT, Model EW-1
The ideal present for youngsters. Will make over 20 exciting experiments, including Transistor Radios, Intercoms, Burglar Alarm. Electric Eye, etc. No soldering. 72-page well illustrated instruction manual. Two-colour Club badge given free with every kit. Total price £7.13.6 incl. P.T.

A WHOLE RANGE OF PACKAGED DEALS (INCLUDING "CONNOISSEUR CRAFTSMAN" TURNTABLE and DECCA fms PICK-UP) NOW AVAILABLE TO SAVE YOU FURTHER MONEY.

All prices include free delivery in U.K. Deferred terms available on orders over £10

JUST POST THIS COUPON FOR FURTHER INFORMATION

Without obligation please send me
★ HEATHKIT FREE BRITISH CATALOGUE . . .
FULL DETAILS OF MODEL(S)

TICK
HERE

Kindly write below in BLOCK CAPITALS

NAME

ADDRESS

HT8..


WE SHALL BE EXHIBITING at the TELEVISION AND RADIO SHOW, Earls Court, LONDON, August 26th—September 5th, 1964, STAND 32, 11 a.m.—9 p.m. AND LOOK FORWARD TO SEEING YOU.

DAYSTROM LTD. DEPT. H8
GLOUCESTER, ENGLAND
(A subsidiary of Weston Instruments Group) manufacturers of
THE LARGEST-SELLING ELECTRONIC KITS IN THE WORLD



EXPERTS
CHOOSE
PHILIPS
MAGNETIC
TAPE

—for perfect recordings
of every sound

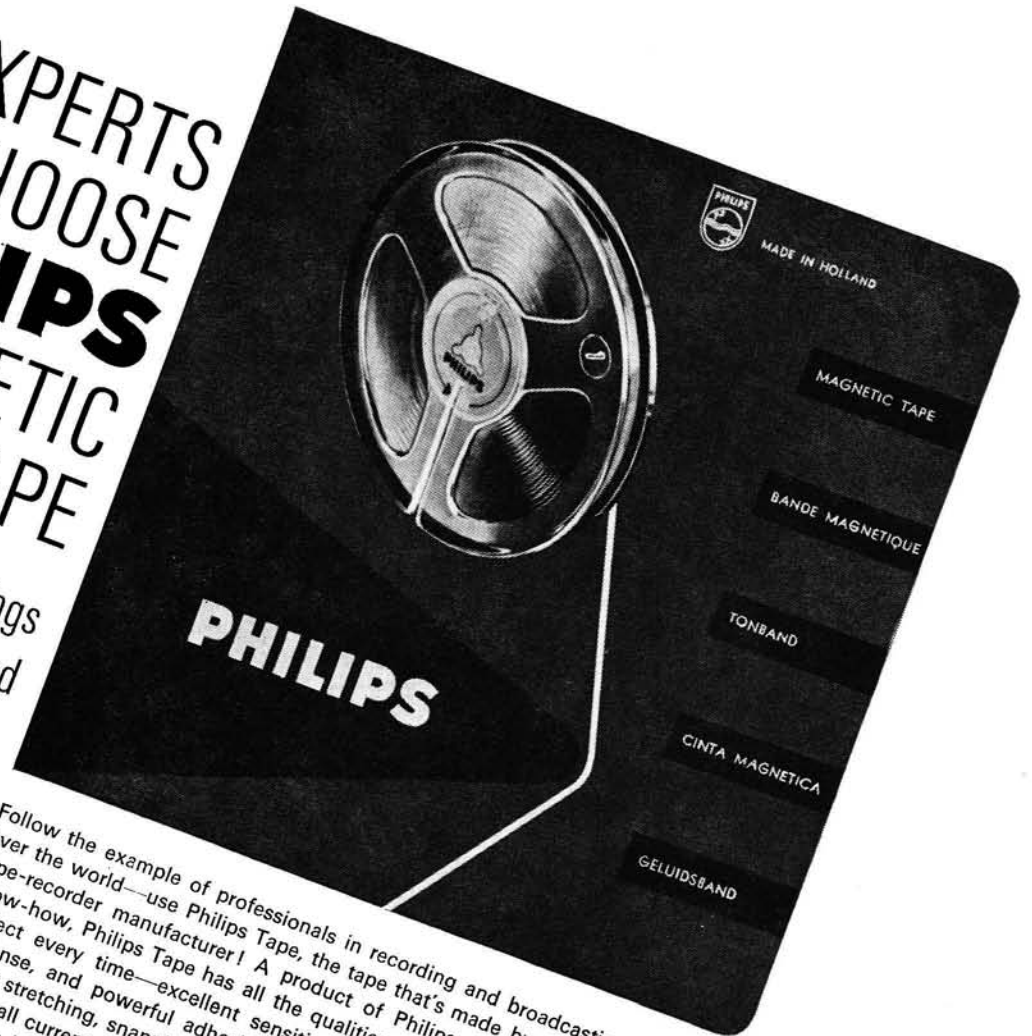

Follow the example of professionals in recording and broadcasting studios all over the world—use Philips Tape, the tape that's made by the world's leading tape-recorder manufacturer! A product of Philips unrivalled experience and know-how, Philips Tape has all the qualities needed to make your recordings perfect every time—excellent sensitivity, low noise level, uniform frequency response, and powerful adhesion of the magnetic coating. It's tough, too—resists stretching, snapping and tearing. Philips Tape is available in four types and in all current reel sizes; apart from the special Audio Letter message tapes all types have metallized switching foil and leader tape with writing surfaces. What's more, each type comes in a colour-coded box for easy identification. Ask for Philips Tape next time you buy a new reel.

- GREEN for standard
- RED for longplay
- BLUE for doubleplay
- GREY for tripleplay

More fine products from  **PHILIPS** — the friend of the family


PHILIPS ELECTRICAL LIMITED,
ELECTRO-ACOUSTICS DIVISION,
CENTURY HOUSE · SHAFTESBURY
AVENUE · LONDON, W.C.2.



"WHENEVER THE DEMAND IS FOR PRECISION RELIABILITY AND NATURAL SOUND REPRODUCTION —THE CHOICE MUST BE TANDBERG"

SERIES

6




Model 64 4 track
Model 62 2 track
Price 110 gns. each.

Semi professional Stereo/mono tape recorders with cathode follower output. Three speeds— Three heads — Four amplifiers — "Sound on Sound" etc.

SERIES

7




Model 74 4 track
Model 72 2 track
Price 93 gns. each.

Build-it-in or carry-it-around. Complete stereo/mono record and playback with own power amplifiers and speakers. Three speeds — dual record indicators — output for hi-fi pre-amps — centre channel for language teaching or cine work.

SERIES

8




Model 823 2 track (teak case) **54 gns.**
Model 822 2 track (Portable with lid) **57 gns.**
Model 843 4 track (teak case) **59 gns.**
Model 842 4 track (Portable with lid) **62 gns.**

High class monaural tape recorders suitable for home, business, education, photo sound, etc. ($3\frac{1}{2}$ and $1\frac{1}{2}$ I.P.S. speeds — 7" reels).

SERIES


9



Model 92 2 track only (teak case) **69 gns.**


High class monaural 3 speed ($7\frac{1}{2}$, $3\frac{3}{4}$, $1\frac{7}{8}$ I.P.S.) tape recorder, with quality comparable to the famous Stereo models. Extremely reliable machine recommended for all home and educational purposes, etc.

HULDRA RADIO



Model 7-41 without speakers **80 gns.**
Model 7-42 with speakers **87 gns.**
Incorporate stereo amplifiers (for series 6 recorders) and outstanding radio performance so necessary in Scandinavia. F.M. and L.W. M.W. S.W.1. S.W.2. A.M. bands. Novel "Baby Sitter" circuit.


TRANSISTOR RADIO




Model TTR/AUTO
49 gns.

Covers L.W. M.W. S.W. and F.M. bands Special facilities for car radio use (special car accessories available) Handsomely styled in walnut. Fine performance and quality sound reproduction, separate bass and treble controls.

LOUDSPEAKERS



Model Speaker 813 gns. justly claim to be



Model Hi-Fi 322 gns.

In handsome teak cabinets specially designed for use with Tandberg Tape Recorders and Radios. Can High Fidelity reproducers. Dimensions: 22" x 10 $\frac{1}{2}$ " x 9 $\frac{1}{2}$ " deep. 14 $\frac{1}{2}$ " x 10 $\frac{1}{2}$ " x 5 $\frac{1}{2}$ " deep.

Tandberg

For further information and specifications please write to:

Elstone Electronics Limited, Edward Street, Templar Street,
Leeds 2. Telephone: Leeds 3-5111 (7 lines)



EVER READY HIGH POWER MEANS 4 TIMES MORE RECORDING PER BATTERY

This is the Ever Ready HP2 battery, one of the revolutionary new range of High Power batteries. At current drains of 300 mA in tape-recorders the HP2 has a working life over 4 times as long as that of the standard U2. HP batteries are extending the life and so the use of many types of battery-powered equipment from toys to photo-flash in the same way. Get full details from The Ever Ready Co (GB) Ltd., Hercules Place, Holloway, London N7. Telephone: ARChway 3030



for longer life!

tape recorder

INCORPORATING 'SOUND AND CINE'

EDITOR JOHN CRABBE

NEWS EDITOR DAVID KIRK

ADVERTISEMENT MANAGER ROBIN WELLS

Editorial and Advertising offices

LINK HOUSE, DINGWALL AVENUE, CROYDON, SURREY

Telephone MUNICIPAL 2599 (16 lines)

© Link House Publications Limited, 1965. All rights reserved.

editorial

STANDARDISATION IS A wonderful thing and we in Britain are more fortunate than most, having no less than three standard systems for connecting electronic equipment. Bitter opposition is to be met in all corners of the audio field, the editorial staff itself being sharply divided in favour of one or other system.

Jack, *DIN* and *phono* are the most widely found connections on tape recorders and ancillary equipment currently available in this country. These can be sub-divided into a total of nine different plugs and sockets, there being four basic types of jack: the GPO, three-way GPO (for specialised applications), miniature and sub-miniature versions. The DIN system comprises four different audio plugs, with variations in positioning and wiring of pins. The phono-plug takes only one form but has a big brother, the coaxial-connector, widely used in television applications and on a very few domestic recorders.

It is a fashionable line of thought to praise the Common Market Countries for their efficient and modern-minded approach to commerce and technology while bestowing denigrations on our own manufacturers for lacking similar drive and competency. On the topic of plugs and sockets, however, we beg to differ. Let us consider the advantages and disadvantages of the three systems.

The GPO jack is by far the oldest standard connection and was devised many years ago to meet the requirements of the telephone switchboard. It is sturdy, simply constructed, and easier to insert and extract than any other plug. At the same time, it locks firmly into position and can be of attractive appearance. Two major criticisms are frequently placed against it: the 'ease' with which equipment can be damaged through mistaken insertion of, for example, a low-impedance ribbon microphone into the output socket of a power amplifier; and secondly, the inability of the jack to handle more than one signal at any one time.

DIN plugs and sockets certainly solve the latter two problems and, for this reason, have become used on almost all Continental audio equipment. But in dear old Britain, where *nothing* can achieve overall acceptance, the DIN system only adds to the general confusion—and it causes more confusion than all the other systems put together. The DIN system was cleverly planned to cover all eventualities—with one exception. It falls down completely when brought into play with non-DIN connections. Under present conditions (admittedly the fault lies, to some extent, with importers), if a Continental recorder is to be connected to a British radio, or to any electronic device not fitted with DIN sockets, a patch cord must be produced by cutting a cable at some point between two plugs. The confusion of wires that spring to light takes on no apparent logic whatsoever. Which wires are connected to which pins? Simple solution to a seemingly simple question is—dismantle the plug and have a look. But no! We find ourselves back where we started, knowing nothing about which *pins* go where, which of the many sub-sockets are wired and which are not. Of course, many importers dare not (or cannot?) betray the 'look after each other' conditions within 'the trade' by disclosing such information.

For similar reasons, the 'experimenter's plug'—a DIN plug fitted with an array of pins, connected to a 'tree' of loose wires, is likely to be of questionable use. But returning to neatness and simplicity: would you find an array of coloured leads (whether you

knew the colour coding or not) neater and simpler to use than, say, five jack sockets?

Phono plugs have none of the advantages of jack or DIN systems but are fairly well suited to use in such more or less permanent connections as those between amplifiers, pickups and tuners. Many types are far too weak for use as microphone connections since only a few extractions are required to pull the leads from their fixture.

It is an open question whether jacks are superior to DIN connections, the decision hinging on whether versatility or simplicity are the most important considerations in the operation and connection of audio equipment. The popular argument against jacks, already mentioned, can be made totally invalid with proper labelling of input and output sockets—labelling which is indeed to be found on all tape equipment. The fact that more than one ingoing and outgoing signal can be passed through the same plug and socket is hardly more than a gimmick in support of DIN. The fact that only one signal passes through one jack connection is the very point that has made it acceptable in professional fields, not to say the domestic recording world, since the operator is perfectly sure of what is connected to what. Leave the colour codes to resistors and capacitors. It should not be necessary to carry a chart just for the sake of wiring a plug.

While the DIN system may be ideal for the Continent where it is found on all equipment, it does not seem so well suited to this country, much of our market being filled with imported equipment, such as from America and Japan, fitted with jacks. These opinions are, of course, based on our own experience and we would welcome readers' comments on the connection controversy.

APRIL 1965 . VOLUME 7 . NUMBER 3

- 101 WORLD OF TAPE
- 101 AUDIO FAIR EXHIBITORS
- 103 ABC OF TAPE RECORDING—PART 1
By David Kirk
- 107 PRINTER'S ERROR
By H. W. Hellyer
- 108 TOWARDS BETTER TAPING—PART 13
By Gordon J. King
- 111 SITUATION VACANT (TAPE PLAY)
By David Haines
- 112 A HIGH GAIN MINIATURE TRANSISTOR MICROPHONE
PREAMPLIFIER
By G. A. Stevens
- 115 THE CONTRONICS CINESOUND SYSTEM
By Richard Golding
- 117 RECORDING BIRD SONG—PART 1
By A. G. Field
- 119 THE GRUNDIG METHOD
- 121 READERS' LETTERS
- 123 TAPE REVIEWS
- 124 TAPE RECORDER SERVICE—No. 40
By H. W. Hellyer
- 127 NEW PRODUCTS
- 129 PHILIPS EL3548 REVIEW
By B. R. J. Plumtree
- 133 CLASSIFIED ADVERTISEMENTS
- 134 ADVERTISERS' INDEX

COVER PICTURE

The static motion of a *Weisskehlamazilie* in flight is captured on this month's cover photograph, for which we are indebted to *Grundig*. Bird recording is an art discussed in a two-part series in this issue. Just as amazing is the art of bird photography; this shot was taken with a stroboscopic flashlight, each flash lasting one-hundred-thousandth of a second.

SUBSCRIPTION RATES

Annual subscription rates to *Tape Recorder* and its associated magazine *Hi-Fi News* are each 30s. in the U.K. and 32s. 6d. overseas (U.S.A. \$4.50) from Link House Publications Ltd., Dingwall Avenue, Croydon, Surrey.

Tape Recorder is published on the 14th of the preceding month unless that date falls on a weekend, when it appears on the Friday.



YOU SAID IT!
 (played it, sang it!)
NATIONAL
 HAVE IT TAPED
SUPERBLY!

Just say the word — and it starts!
 You stop, and the recording stops,
 too! The **National RQ-150** is the
 first completely automatic **Voice-**
 operated portable tape recorder in
 the world.

And this is only the beginning—the incomparably versatile RQ-150 also provides automatic slide and film synchronisation, automatic threading and remote control. If you really want to spread the word, there's a Public Address System that permits accurate monitoring through a built-in loudspeaker while recording. All this and *immaculate* reproduction—for precisely 44 gns!

SPECIFICATION

- Power Source:** 6 unit cells (U.Z.), 9 V.
- Output:** 500mW (700mW max.)
- Transistors:** 9 Transistors, 1 Thermistor, 1 Diode.
- Tape Speed:** 3½ i.p.s., 1½ i.p.s.
- Frequency Response:** 100-7,000 c/s at 3½ i.p.s., 100-4,000 c/s at 1½ i.p.s.
- Recording Level Indicator:** VU meter.
- Speaker:** 3½" Permanent Dynamic Speaker.
- Dimensions:** 3½" x 9" x 12½".
- Weight:** 5 lb. 14½ oz.
- Accessories:** Dynamic microphone with remote control switch; 5" recording tape (600 ft.); 5" empty reel; radio cord; leather case for accessories; hand belt; splicing tape; sensing tape; plug for slide sync.; magnetic earphone.



RQ-303

- Also from NATIONAL:**
- RQ-303, Mains, 2 track, single speed, 15 gns.
 - RQ-115, Battery*, 2 track, 2 speed, 35 gns.
 - RQ-116, Battery*, 4 track, 2 speed, 39 gns.
 - RS-753, Mains, Full stereo, 4 track, 2 speed, 76 gns.

*With optional mains adaptor available



RQ-115 &
RQ-116



**TAPE
IT
EASY—**

with **NATIONAL**,
naturally!

world of tape

BRITISH TAPE RECORDING CONTEST

FOR the first time since its foundation in 1957, the *British Amateur Tape Recording Contest* has relinquished *Amateur* from its title and been expanded to cover entries from professional recording engineers.

Three categories of entry fulfil the obvious need for revised judging technique, recordists with less than one year's experience being classed as 'Novices' and non-professionals who have owned a recorder for more than a year being 'Amateurs'. Schools and clubs are also welcomed under the same conditions of entry.

Any type of recording at any speed may be submitted, though care must be taken not to infringe Copyright regulations. Copyright material may be included if written authority is first obtained.


The Contest is sponsored by eight tape manufacturers: *Agfa, BASF, EMI, Kodak, MSS, 3M, Philips* and *Ilford-Zonal*. Further details and entry form may be obtained from: **B.T.R.C., 42 Manchester Street, London, W.1.**

SONY/B & O DISTRIBUTION

RE-ARRANGEMENTS in distribution of *Sony* and *Bang & Olufson* products have resulted in a change of name for *St. Aldate Warehouse Ltd.* The company is now known as *Debenhams Electrical & Radio Distribution Ltd.* All enquiries regarding these products should be addressed to them at Eastbrook Road, Eastern Avenue, Gloucester.

CORRECTION TO THE MIXER

AN error appeared in the circuit fig. 2 of the article *A Comprehensive Mixer* on page 25 of the January issue. The position of R6 (4.7K) should be as shown below. We apologise for the mistake and hope no great inconvenience was caused.

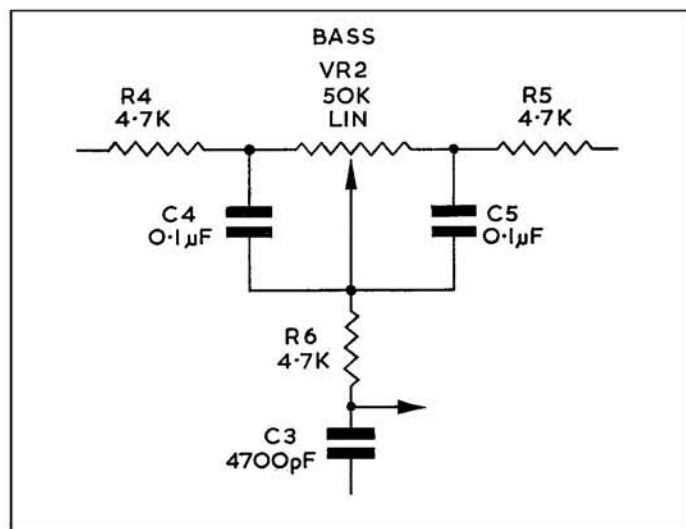

AUDIO FAIR TICKETS

TICKETS for the 1965 *International Audio Festival and Fair*, to be held at the Hotel Russell from 22nd to 25th April, are now obtainable from the editorial office. It is important that a note stating the number of tickets required and a stamped addressed envelope be included with such requests.

NEXT MONTH

TAPE AT THE AUDIO FAIR will be the subject of a preview in the May issue, to be published on 14th April. Robert Kendal will describe the way three writers use tape recorders to aid their literary talents, and the domestic recording scene in the Soviet Union will be detailed by Leonid Sambek. Alec Tutchings reviews the Sony TC 500, while Michael Jack describes the trials and tribulations of organ recording.

MANUFACTURERS' COMMENT ON THE GRAMPIAN REVIEW

THE following comments have been received from Grampian Reproducers Ltd. answering points raised in the review of the Grampian Reverberation Unit, which appeared in the March issue:

'(1) The bass loss shown in the reviewer's "direct path curve" is most likely due to feeding the 10mV Auxiliary input from a low impedance source. In practice this input would be used with high impedance sources approaching the matching impedance of 50K ohms. Under these conditions the bass loss mentioned would be negligible. This limitation does not apply to the 500mV Auxiliary input which gives a level response independent of source impedance.

'(2) The socket for connection of a remote switch to control the reverberation signal is provided on all our reverberation units. The facility available "to special order" referred to in the Editorial note is in fact the provision of a switch to control the *direct* path signal as suggested by the reviewer. This feature has been found useful for "hidden speaker" effects suggested and was in fact used in this manner at the last Audio Fair by a well-known loudspeaker manufacturer. It is also desirable in conjunction with many professional mixing consoles and many units have been supplied with this facility. A word of caution, however; when the unit is used alone with no direct path, the subjective effect is unpleasant and of little practical use.'

RECORDING COMPETITION BETWEEN YOUTH CLUBS

THE National Association of Youth Clubs is currently organising a recording contest among its 3,160 member clubs, all of which are believed to have access to a tape recorder. The contest is sponsored by *Emitate* and will be judged in the Autumn. Tapes must be of no longer than ten minutes duration, recorded at 3½ i/s. Three recording topics have been chosen: An interview with an 'unforgettable personality', a sound picture of a youth club suitable for sending to an overseas contemporary and a ten-minute 'radio spread' showing the use to which such broadcasting time would be put if allotted to a club.

1965 AUDIO FAIR EXHIBITORS

Exhibitor	Booth	Dem. Room	Lounge	Trade Name
Acoustical Manufacturing Co. Ltd.	65	404	—	Quad
Agfa Ltd.	33	218	—	Agfa
Akustische U Kino-Gerate GMBH	51	304	—	AKG
Ampex Great Britain Ltd.	15	121	—	Ampex
Armstrong Audio Ltd.	52	347	—	Armstrong
Audio Dynamics Corporation	37	321	—	A.D.C.
B.A.S.F. Chemicals Ltd.	28	312	—	B.A.S.F.
Beyer Elektrotechnische Fabrik	10	413	—	Beyer
BMB Sales Ltd.	48	—	—	BMB
Boosey and Hawkes Ltd.	55	117	—	Jordan-Watts
Braun A. G.	22	311	—	Braun
Brenell Engineering Co. Ltd.	12	337	—	Brenell
S. G. Brown Ltd.	73	320	—	Brown
Celestion Ltd.	46	242	—	Celestion
Clarke and Smith Mfg. Co. Ltd.	35	120	—	Clarke and Smith
Decca Radio and Television Ltd.	31	236	—	Decca Radio
Decca Record Co. Ltd.	23	235	—	Decca Record
Denham and Morley Ltd.	42	220	—	Butoba
Derritron Radio Ltd.	71	318	—	Chapman
Design Furniture Ltd.	45	442	—	Design Furniture
Dual Electronics Ltd.	66	415	—	Dual
E.M.I. Tape Ltd.	24	348	—	E.M.I.
Elcom (Northampton) Ltd.	6	215	—	Elcom
Electroimpex Hungarian Trading Co.	43	221	—	Qualiton
Fane Acoustics Ltd.	38	314	—	Fane Acoustics
Ferroglyph Co. Ltd.	61	147	—	Ferroglyph
Fi-Cord International	11	412	—	Fi-Cord
N. & S. B. Field and Co. Ltd.	21	447	—	Record Housing
Garrard Engineering Ltd.	67	213	—	Garrard

(continued overleaf)

BUY BRITISH

RECORDING TAPE

at the **LOWEST** Prices

Guaranteed to be PREMIUM GRADE

(We do NOT sell "Off-cuts" or "Seconds")

EACH REEL HAS LEADERS AND TRAILERS
AND IS POLYTHENE WRAPPED

INDIVIDUALLY BOXED

STANDARD PLAY (PVC)

5in.	600ft.	9/3
5½in.	850ft.	12/-
7in.	1200ft.	14/6

LONG PLAY (POLYESTER)

5in.	900ft.	12/-
5½in.	1200ft.	14/6
7in.	1800ft.	20/-

DOUBLE PLAY (POLYESTER)

5in.	1200ft.	21/3
5½in.	1800ft.	25/3
7in.	2400ft.	32/-

TRIPLE PLAY (POLYESTER)

5in.	1800ft.	34/3
5½in.	2400ft.	43/3
7in.	3600ft.	63/3

TERMS — Cash with order. Add 1/6 per reel
for postage and packing.

**FIRST 150 Orders over 6 reels receive
Hand/Table Crystal Microphone FREE**

UNILET PRODUCTS LTD.

151-153 CLAPHAM HIGH STREET,
LONDON, S.W. 4


AUDIO FAIR EXHIBITORS CONTINUED


Exhibitor	Booth	Dem. Room	Lounge	Trade Name
General Gramophone Publications Ltd.	446	The Gramophone
G.K.D. Ltd.	26	115	—	G.K.D.
Goldring Mfg. Co. (Gt. Britain)	41	334	—	Goldring
Goodmans Industries Ltd.	68	249	—	Goodmans
Grampian Reproducers Ltd.	54	302	—	Grampian
C. E. Hammond and Co. Ltd.	14	112	—	Hammond
Hanson Books Ltd.	74	—	—	Records and Recording
Haymarket Press Ltd.	50	—	—	Amateur Tape Recording
Ilford Ltd.	62	113	—	Ilford
Iliffe Electrical Publications Ltd.	1	—	—	Wireless World, Wireless Elect. Trader
K.E.F. Electronics Ltd.	36	322	—	K.E.F.
Kelly Speakers	32	231	—	Kelly
Kodak Ltd.	59	248	—	Kodak
H. J. Leak and Co. Ltd.	69	448	—	Leak
Link House Publications Ltd.	39	—	—	Hi-Fi News and Tape Recorder
Loewe-Opta AG	40	118	—	Loewe-Opta
Long Playing Record Library	—	—	155	Long Playing Record Lib.
Lowther Manufacturing Co.	29	234	—	Lowther
Lustraphone Ltd.	16	342	—	Lustraphone
Mallory Batteries Ltd.	19A	—	—	Mallory
Metro-Sound Mfg. Co. Ltd.	2A	114	—	Sonotone
Minnesota Mining and Mfg. Co. Ltd.	58	420	—	Scotch
M.S.S. Recording Co. Ltd.	9	—	—	M.S.S.
Mullard Ltd.	19	211	—	Mullard
Ortofon A/S	3A	217	—	Ortofon
Peto-Scott Ltd.	—	152	—	Peto-Scott
Philips Electrical Ltd.	8	149	—	Philips
Planet Projects Ltd.	30	313	—	Planet
Print and Press Services Ltd.	—	—	244	Tape Recording Magazine
Pullin Photographic Ltd.	25	214	—	Akai
Pye Ltd.	56	402	—	Pye
Radford Electronics Ltd.	5	122	—	Radford
Reslo-Sound Ltd.	70	—	—	Reslo
Revox-Studer	72	417	—	Revox-Studer
Rogers Developments Ltd.	44	111	—	Rogers
Saba Electronics Ltd.	47	212	—	Saba
Scandinavian Radio and TV Co.	13	—	—	S.R.T.
H. H. Scott Inc.	17	—	—	Scott
Shure Electronics Ltd.	64	349	—	Shure
S.M.E. Ltd.	57	—	—	S.M.E.
Sony Copn. of Japan	49	315	—	Sony
Standard Telephones and Cables Ltd.	3	—	—	S.T.C.
A. R. Sugden and Co. Ltd.	34	144	—	Connoisseur
Svenska Høgtalabriken	1A	—	—	Svenska Hog.
Tandbergs Radiofabrikk A-S	18	222	—	Tandberg
Tannoy Products Ltd.	63	411	—	Tannoy
Thorens S.A.	4A	—	—	Thorens
Truvox Ltd.	2	202	—	Truvox
Vortexion Ltd.	27	204	—	Vortexion
Welmec Corporation Ltd.	7	237	—	Telefunken
Wharfedale Wireless Works Ltd.	53	247	—	Wharfedale
Whiteley Electrical Radio Co.	60	449	—	Whiteley
K. H. Williman and Co. Ltd.	—	—	246	Williman
Wilmex Ltd.	—	—	153	Wilmex
Wilson Stereo Library Ltd.	—	—	154	Wilson Stereo Library
Winter Trading Co. Ltd.	20	111	—	Trio

THERE are no less than 200 different tape recorders on sale in Britain. Choosing from this vast array can be a difficult task unless one can narrow the field of purchase by deciding on a suitable price and specification. Price is really no problem. Just as one cannot buy a motor vehicle for £10 and expect it to work efficiently, so it would be foolish to expect a reliable tape recorder to cost £5.

The tape recorder comes in four price categories. Between £4 and £20 will buy little more than a toy, although a few manufacturers are now producing recorders built round the popular *BSR Monardeck*

THE ABC OF TAPE RECORDING





absolute
beginners
corner

BUYING A TAPE RECORDER

PART ONE BY DAVID KIRK

which give very good value for a comparatively small outlay. From £20 to £80 will buy what is aptly called a 'domestic' recorder—domesticated in the sense that it looks pretty, is simple to use, cannot be dismantled without special tools and will not impart an electric shock to innocent fingers.

LIMITED LIFETIME

Domestic tape recorders can be bought for as much as £200 and they often provide good service for a period of several years. But if unlimited funds are available, the 'semi-professional' recorder ranks as 'best buy'. The 'semi' makes way more and more for the 'professional' until, on arrival at the £500 mark, a species of tape recorder unique to the broadcasting and recording studio is found. 'Professional' equipment—as meaningless a piece of terminology as one is ever likely to find—earns its keep merely by working as perfectly as is possible within contemporary technological standards. Everything is sacrificed to perfection, making the Professional recorder very expensive to run—with its huge appetite for tape—and very unsuitable, in terms of size, for domestic surroundings.

In the first of this series for beginners it is intended to introduce the

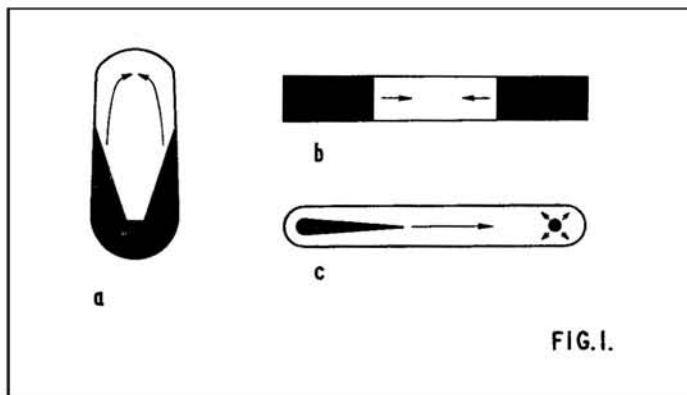


FIG. 1.

basic language of the 'specification' with a view to helping the prospective purchaser of a tape recorder to understand sales literature. Since most beginners will already own a recorder, it is hoped to perform the double task of helping the owner along the short, straight road to understanding technical terminology.

We begin, then, with the *Manufacturer's Specification*. A typical sales leaflet will include the following factual statements, a suitable figure given beside each: Tape Speed, Wow and flutter, Output power, Frequency response, Signal-to-noise ratio, Input impedance, and finally Price.

These technical terms are not solely designed to attract admiration from the uninformed buyer. They also serve the purpose of showing standards of mechanical and electrical performance, the recorder with the 'best' figures for a given price offering the greatest value. It is initially advisable, therefore, to know the way in which these measurements are taken.


SINGLE SPEED

Tape speed, the speed at which the tape passes the recording heads, is measured in inches-per-second (i/s). Many machines nowadays employ the single speed of $3\frac{1}{2}$ i/s, though some offer $1\frac{1}{2}$ i/s and an even smaller percentage also run at $7\frac{1}{2}$ i/s. Although some designers have been able to achieve remarkably good reproduction at $3\frac{1}{2}$ i/s, it is wise to remember the basic rule that the faster the speed, the better the quality. In the early days of tape recording (during the late 1930's) speeds of 30 and 60 i/s were commonplace. Nowadays, however, even the BBC rarely go above 15 i/s for broadcast recording and much of their equipment operates at $7\frac{1}{2}$ i/s. If it is planned to enter the hi-fi field at some future date, $7\frac{1}{2}$ i/s can be considered an essential speed; $3\frac{1}{2}$ i/s will suffice for speech and, depending on the machine chosen, light music.

When a manufacturer says his product operates at, say, $3\frac{1}{2}$ i/s, one can be sure that this statement is true within about $\frac{1}{2}$ i/s. Threading a single tape from one recorder to another, leaving a certain amount of slack in between the two capstans, is the easiest way of showing basic speed variations from machine to machine. The problem of differing speeds only becomes troublesome when tapes are recorded on one machine and played on another. It would be interesting to know how many 'tape-correspondents' have a completely wrong impression of

(continued on page 105)

Grundig lift the lid on four new Tape Recorders

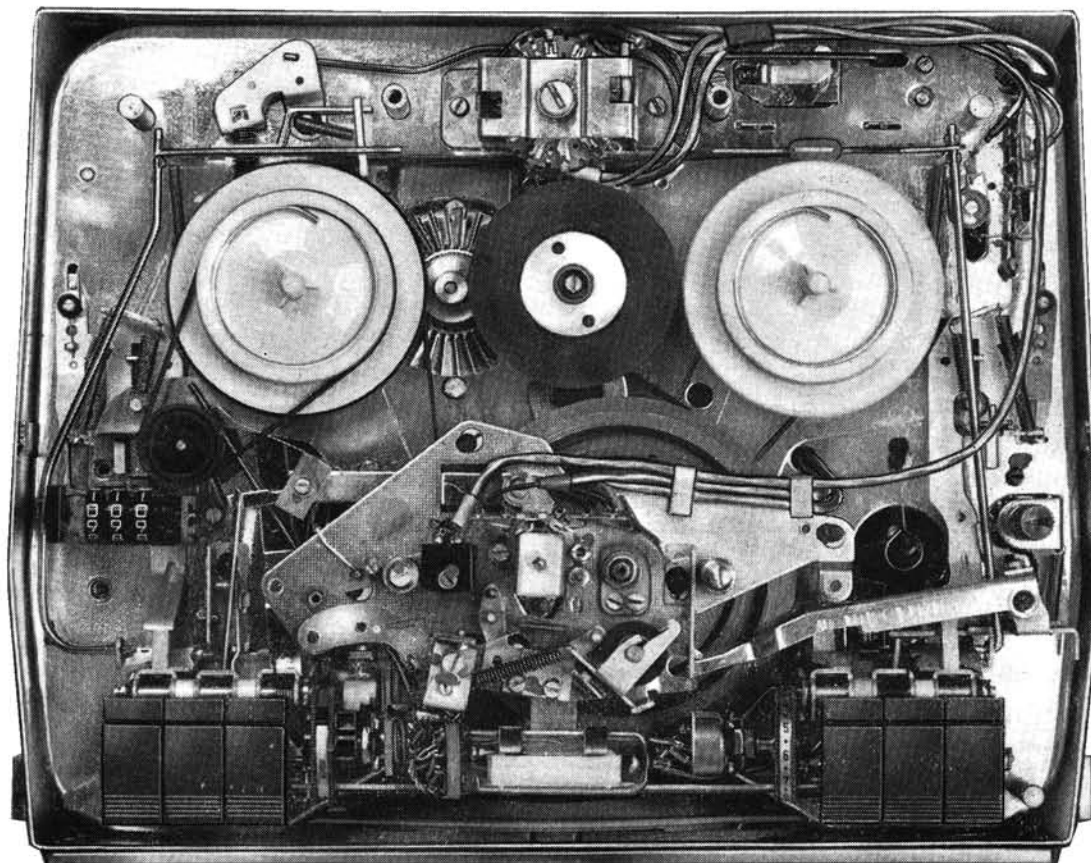

And set new styling standards inside and out!

350 Design and Development engineers went to work to produce Grundig's new *de luxe* range of tape recorders. They made the internal layout so brilliant that the outside just had to be a world-beater too!

Here's what you get: a complete choice of two track, two track automatic, four track and four track automatic machines, at sensible prices, from 37 gns.

It's worth remembering that whatever you pay, Grundig make no charge at all for a 7 gn. *dynamic* microphone, and a good-looking protective case. You'll get an ingenious rigid plastic tape library cassette for tape storage, a full 5½" spool of Grundig L.P. or Double Play tape, a screened multi-purpose lead, plus Grundig's unique 12 month Warranty.

Ask us to send you the latest leaflet that dots the i's and crosses the t's of tape recording. You'll be delighted, and convinced that Grundig represents the finest value in quality tape recorders today.



GRUNDIG (GREAT BRITAIN) LTD
LONDON, S.E.26 SYDenham 2211

Please send me details of the wonderful new range of Grundig Tape Recorders.

NAME _____

ADDRESS _____

TR4

GRUNDIG

Showroom: 15 Orchard Street, London, W.1. Tel: WELbeck 4898



continued

each other as a result of variations in the pitch of their voice when widely inaccurate playing speeds are used. Generally, the effect is more noticeable on a known voice than on music.

Akin to tape speed inconsistency, indeed often confused with it, is the phenomena of *wow and flutter*. All rotating or moving parts in a tape recorder, or gramophone turntable, have a tendency—great or small—to fluctuate in speed. This fluctuation is discernible as a variation in pitch when a tape is played on a defective machine. The less well made the deck, the poorer the balance of rotating parts and the larger the variations in friction; consequently there are more speed fluctuations. Similarly, the cheaper the motor(s), the more 'tug and pull' due to pole pieces is likely to make itself known to the listener. A rapid deviation from the basic speed is inclined to give a piano, for example, a tremolo shimmering effect. It is easy to understand, when this is first heard, why the name 'flutter' is applied. By the same logic, 'wow' is a much slower and much more noticeable speed fluctuations. Whereas an experienced ear is needed to detect low quantities of flutter, wow is audible to the rawest tyro.

DAMAGED COMPONENTS

It is important to listen for a regular and rapid wow when buying from a non-specialist-audio-cum-washing-machine dealer. This type of retailer is singularly fond of switching the machines on display in his window to the *PLAY OF FAST WIND* position. The recorders are not, of course, actually running, but every rubber idler, pulley and spring is tensioned against solid metal. After a few hours in this position 'flats' are worn into the rubber and the manufacturers' careful grinding and lathework is ruined. *Never* buy a shop-soiled or 'reduced' recorder from a non-specialist dealer—he has no reason to feel a moral obligation towards his customer.

Wow and flutter, although essentially two different things, are measured as a combined percentage variation from the basic tape speed.

A machine with $\pm 100\%$ wow and flutter would obviously be continuously stopping and doubling in speed while $\pm 50\%$ would rapidly rise and fall between $1\frac{1}{2}$ and a half the speed of measurement. Figures of this magnitude are never (to my knowledge!) met with in practice and are only given to illustrate a point. Normally, a domestic recorder can be expected to remain within 1% peak-to-peak of $3\frac{1}{2}$ i/s, a slightly greater percentage being permissible at $1\frac{1}{2}$ i/s, following the rule of quality deteriorating with speed. The words 'peak-to-peak' indicate simply that the stated percentage is the difference between the fastest and slowest 'peaks' of speed variation.

'COOKED' SPECIFICATION

Should the letters 'RMS' appear after the percentage, one has the first faint suggestion that the entire specification may be 'cooked'. The most useful way of showing wow and flutter, from the purchaser's viewpoint, is the 'peak' value—half the figure of the peak-to-peak percentage. This value is the percentage variation from the given tape speed—no more and no less. But the RMS value is 0.707 (roughly two-thirds) of the peak value. Thus a lower figure can be quoted for a given wow and flutter level by taking the RMS, to the manufacturer's advantage when a non-technical person peruses his specification. The RMS figure provides the more-or-less average departure from playing speed during a given time, but a huge instantaneous deviation from true speed, accompanied by an otherwise low level of flutter, might only register as a slight deterioration of the RMS level.


From the tape transport mechanism we move to the amplifiers; note the plural, a mono tape recorder incorporates at least two amplifying networks, the *record* and the *playback* circuits. *Frequency response* is the publicity man's favourite pair of words. This is the amplifiers' response (or reaction) to certain audio frequencies. All sound is composed of rapid vibration: in the violin, guitar, 'cello

and piano it is a taut wire that vibrates, the motive force coming, respectively, from scraping, plucking, scraping again, and hammering. In the trumpet, accordion and pipe organ, air is forced through vibrating reeds or tubes. The electronic organ feeds a loudspeaker with electrical vibrations from an audio oscillator.

Having converted the acoustic vibrations into electrical ones (via a microphone) they are fed through a conglomeration of valves, resistors, capacitors and transformers, by which they are amplified, before being converted into magnetic 'vibrations' by the tape head. This conglomeration is quite happy to amplify signals within a certain range of frequencies, but functions less efficiently with relatively high or low audible frequencies. Thus some sounds, or components of sounds, become amplified more than others. The amplifier's partiality for certain frequencies often means the upper and lower limits of the audio range are not reproduced with any useable volume: the tingling triangle and the snaredrums, with the double-bass and the bass-drum, are invariably degraded on domestic tape recorders—to the annoyance of the music lover. The better the amplifier, the wider its 'palate' for audio frequencies. Microphones, tape heads, tape and even the direct-recording lead, have similar preferences for certain frequencies. The wider the frequency range over which this chain of components will operate—the better the reproduction. A cheap recorder may have such a poor frequency response that it is little better in quality than a transistor radio.

RANGE AND RESPONSE

It will be noticed that both frequency *range* and frequency *response* have been mentioned. If the frequency *range* of an electronic device is given as *a* c/s to *b* Kc/s, then these are the lower and upper limits beyond which the unit will not operate. Should these figures be qualified by the addition of a relative signal level (measured in decibels), we then have the frequency *response*. The frequency band over which the response is 'flat' (i.e., equal amplification is given to all

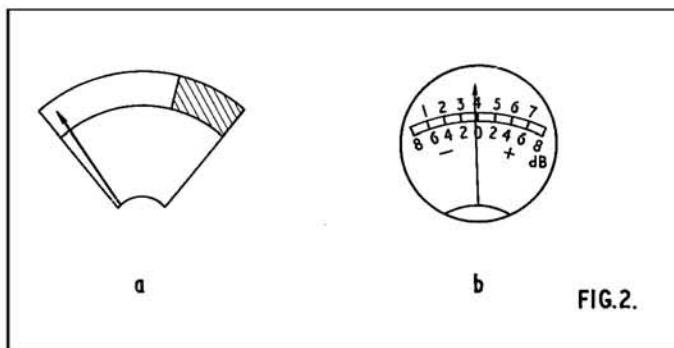

frequencies within the band) is likely to be considerably narrower than the total frequency range.

Next on our list is the *modulation indicator*. This is a vital instrument without which one would be unable to tell whether the tape was being overloaded or under-recorded. There are two basic types of indicator—the luminous-anode valve (magic-eye) and the meter. Recording level meters and their associated circuitry can be made to indicate two different components in an audio signal. These are termed the VU-meter (Volume Unit) and the PPM (Peak Programme Meter.) VU-meters (and the circuits that drive them) are quite cheap to manufacture and have recently become popular with manufacturers of domestic tape recorders. A properly designed VU-meter should show the average volume level of the sound being recorded. In practice, however, even the best VU's fail to do this, the movement of their pointer depending, not only on volume, but on frequency and 'subject material'. Experiments by the BBC have shown that a professional VU-meter calibrated to one speaker's voice can react quite differently to another. Since this is an unforgivable fault in a component designed to measure distortion level, the BBC make use of the rather more expensive peak programme meter. This is a highly sensitive device, the pointer of which changes its position in accordance with the maximum level of a sound signal. It has a very short 'rise time', responding to sharp bursts of sound (peaks) which would scarcely cause the VU-meter to move. A VU-meter is quite sluggish in rising and falling since it follows the average sound level.

(continued on page 107)

This month's specials

TAPE RECORDER CENTRE

TAPE RECORDERS

The largest, most comprehensive selection: 2-track, 4-track, Mono and Stereo

Mains and Battery Models

BRENDEL

BUTOBA

B. & O.

COSSOR

ELIZABETHAN

FERGUSON

FERROGRAPH

GRUNDIG

LOEWE OPTA

PHILIPS

SABA

SANYO

STANDARD

STELLA

TANDBERG

TELEFUNKEN

TRUVOX

UHER

VORTEXION

VIKING TRANSISTOR 50-WATT AMPLIFIER

50 Watt output. Superb amplifier for all music and P.A. work—ideal for guitars, groups, etc. Fully transistorised for maximum efficiency, 4 inputs with mixing facilities plus reverb/echo chamber. Fully built and guaranteed. In strong wood cabinet covered in washable material, size approx. 22 x 10 x 6in. Output imp. 15 ohms. For operation on 200/250v. A.C. Mains.

Tape Recorder Centre Price 45 Gns. P. & P. 10/- (\$135 + P. & P.)

VIKING 30-WATT AMPLIFIER

High quality valve model. Guitar and P.A. amplifier. A.C. Mains operated—30 watt output. 8 inputs, fitted with 4 separate volume controls for mixing, also Bass and Treble controls. 15 ohms out. British made, highest quality components used throughout, fully guaranteed. In strong portable case, size approx. 20 x 9 x 6in.

T.R.C. Price 35 Gns. P. & P. 7/6 extra. (\$105 + P. & P.)

T.R.C. 20-WATT AMPLIFIER

2 inputs, mixing, Bass & Treble tone controls. British made. Fully guaranteed. A.C. Mains operated.

T.R.C. Price 15 Gns. (\$45)

PLI FULLY AUTOMATIC RECORD PLAYER

B.S.R. Changer, 2 Watt Output. Attractive Rexine covered cabinet. A.C. Mains. Separate volume/tone controls.

T.R.C. Price £11.19.6 Tax Paid. P. & P. 10/- (\$33.50 + P. & P.)

TRANSISTOR RADIOS

Pocket Size: "Bestone", Medium Waveband, 6 Transistors complete

T.R.C. Price 59/6 (\$8.35) + P.P.

"Gold Spot" 2 Wave Band, M.L., Telescopic Aerial
Leather Carrying Case

T.R.C. Price £5.9.6 (\$15.40) + P.P.

"Binatone" 3 Wave Band, M.L.S., Telescopic Aerial
Attractive 2 Tone Plastic Cabinet

T.R.C. Price £11.19.6 (\$33.50) + P.P.

"Empress" 3 Wave Band, M.L.S. Telescopic Aerial
Leather Case

T.R.C. Price 12½ Gns. (\$38.50) + P.P.

TAPE DECKS

Collaro Studio 2 Track 3 Speeds

£10.10.0 (\$30)

B.S.R. TD2 2 Track 3¾" per sec.

£7.7.0 (\$21)

4 Track 3¾" per sec.

£8.19.6 (\$25.10)

AUTOMATIC RECORD CHANGERS

B.S.R. UA14 4 Speed

£4.10.6 (\$13.30)

„ Slim line „

£4.19.6 (\$13.90)

NEWMATIC CAR RADIO

All Transistor, Complete with Speaker, Baffle and brackets

£13.2.6 (\$36.75) Tax Paid

HI-FI EQUIPMENT

Speakers

Amplifiers

Pre-amps

Pick-ups

Tuners

ARMSTRONG

GARRARD

GOLDRING-LENCO

GOODMANS

LEAK

LOWTHER

LUSTRAPHONE

QUAD

ROGERS

S.M.E.

THORENS

WHARFEDALE

W. B. STENTORIAN

Tape :

AGFA

B.A.S.F.

E.M.I.

FERROGRAPH

GRUNDIG

MASTERTAPE

PHILIPS

SCOTCH BOY

TELEFUNKEN

Pre-recorded tape

Microphones

Styli

Accessories

THE TAPE RECORDER CENTRE



THE TAPE RECORDER CENTRE LTD · 82 HIGH HOLBORN · LONDON WC1 · TELEPHONE CHAncery 7401

Attractive H.P. Terms



continued

Messrs. *Tandberg* are one of the few manufacturers of high quality equipment who have had the courage to retain luminous-anode indicators on their recorders—some of which sell for over £100. Incorporated in the first machines designed for the domestic market, the 'magic eye', as it is reverently termed, follows the principle used in the PPM of indicating peak signal level. They are much cheaper to produce than PPM's but are often more efficient at their job, having no mechanical resistance to movement to overcome.

All three magic eyes shown in *fig. 1* use the same general principle as a television tube. Electrons emitted by a heated cathode are hurled towards a positively charged anode plate, 'focused' by a grid. On striking the phosphor-coated anode, the energy in each electron is given off as light—the *position* of the light source depending on the voltage at the grid. *Fig. 1(b)* shows the most common magic eye: two shaded areas representing the glowing 'pointers'. The latter move together to-and-from the centre of the eye and are normally aligned to indicate the onset of distortion when the beams clash. Slightly lower on the list of popularity is the eye shown in *fig. 1(a)*. On this model distortion occurs when the beams clash at the top of the indicator. This type of eye can also be found on a wide range of FM radio receivers, where it is employed to assist tuning. Only one moving beam is used in the 'exclamation mark' eye of *fig. 1(c)*, the right-hand spot remaining stationary, but varying in brilliance. The first type of eye to find regular use in the domestic field, the 'exclamation mark' is comparatively dim and sluggish; in practice, distortion was generally aligned to begin long before the beams clashed.

Perhaps through the subconscious influence of my dislike of VU systems, I have omitted to mention the display calibration used for

domestic units. It would seem logical from *fig. 2(a)*, which shows a typical domestic VU, that correct recording level was being attained when the pointer scanned the unshaded graduation, only occasionally passing into the shaded area. In practice, however, this could lead to a very high level of distortion since the peaks (momentary jumps in volume) will continually be moving above the distortion level. The effective range of the VU-meter is reduced to a mere $\frac{3}{16}$ in. in some cases, while the miniature meters found on cheap battery recorders sometimes are really worse than useless—even detracting from efficient guesswork.

Few recorders outside the professional category incorporate peak-programme meters; *Reps*, *Brenell* and *Ferroglyph* are three of the few semi-professional brands currently doing so. Whereas the sensitive magic-eye attempts to follow every peak and trough in the volume contour, the PPM registers only peaks, depending on the programme material. *Fig. 2(b)* shows the layout of the PPM face, which is calibrated in decibels (dB) above and below the distortion sector, which is designated zero.

COMPARATIVE SPECIFICATIONS

These, then, are some of the more important points to be considered when purchasing a tape recorder. Do not be fooled by over-impressive specifications when they are applied to domestic equipment. Such publications as the *Hi-Fi Yearbook* reveal many cheap recorders claiming performance equal or superior to equipment in the professional price bracket. Take, for example, the machine listed at just under £280, claiming a frequency response of 50 c/s to 10 Kc/s ± 2 dB and wow and flutter of 0.25% at $7\frac{1}{2}$ i/s. This compares most unfavourably with another machine costing a few shillings over £30, which claims a frequency response from 70 c/s to 12 Kc/s ± 3 dB and wow and flutter of 0.15% at $7\frac{1}{2}$ i/s. The manufacturers of the latter model also list two more of their recorders, using the same mass-produced tape deck, as having *different* wow and flutter levels. No publicity man worth his salt would make slips like this—but why not leave it to a more technically informed employee to cook the specification books? Perhaps the firm does not have any!

Next month we shall examine the basic layout of the tape recorder and the principles by which it operates.

PRINTER'S ERROR

BY H. W. HELLYER

THE trouble is, we don't know when we are well off. The pundits tell us that printed circuits are a great advance on old-fashioned hand-wiring. They give us, so we are assured, much more reliability and a considerable reduction in cost.

On the second score there is little to be said. As a mere engineer, I am not able to argue without my book of matches, but some ardent economist would no doubt refute my cynical argument that any saving that accrues is more likely to augment the profits than cut the price—except in the case of the multi-million, mass-produced tape recorder. In these cases, the vicious wind of competition helps to keep the price down, and printed circuits have certainly enabled us to have many cheaper, 'popular' models that we would otherwise never have seen. Hence, we have possibly recruited a few enthusiasts to the ranks via their pop model introduction to the art. As the Editor commented in the rather disgruntled opening to the December 1964 issue of *Tape Recorder*, quite good tapes can be made with even a modest machine.

DIFFERENT PROBLEM

But on the first score a very different problem may be posed. Is reliability really improved? And, come to that, what do we mean by reliability?

Those pundits we quoted above will tell us that reliability means the machine will work for a longer time without deterioration or failure. This may be true of the satellite, or the mysterious chunks of defence (sic) electronics that proliferate about us. Presumably, a very high standard of construction and test is applied. It can hardly be true of the printed panel with flimsy fixing clamps or bolts, extremely thin and

ill-bonded plating or 'wiring' and components of barely sufficient tolerance.

The point seems to be that no comparable advance in techniques has been made in component ratings. Far too often, capacitors get 'leaky', or open-circuit at the lead-out wires, and resistors overheat and go 'high', even under apparently normal conditions. More often, design parameters are so fine-cut that component tolerances teeter on the brink of failure.

Given that the printed circuit panel has a reliability 'life' factor in direct proportion to the quality of components and efficiency of design, what of when parts break down? Bang goes not only the reliability factor but also the temper of the poor bloke who has to test and repair. Some manufacturers are kind to us, providing not only circuits, but also layout drawings and a 'see-through' reproduction of the printed panel. Even more helpful is the panel which bears coded references to the circuit, and even test points.

GINGERLY SOLDERED

Yet the problem of replacing parts still exists, and even more annoying, the problem of being unable to disconnect a component to make a test without the possibility of destroying it. Usually, one unsolders the one end gingerly and prises, waiting for the ominous 'crack'. Then the spares box is ransacked for a similar part, and this, when triumphantly discovered, is seen to be about three times too big. Hence some of those mended machines that look rather like an old Christmas tree, with parts hanging precariously from the panel. Neither the problem of test, nor replacement arises with the conventional 'hand-wired' circuit.

It is perhaps significant that one of the largest USA television manufacturers—ironically, a pioneer of printed circuitry—came out brazenly with an advertising slogan a couple of years ago, "All circuits wired by hand".

THE signal voltage induced across the winding of a replay head has an amplitude that is proportional to the dimensions of the pole piece and the length of the gap. The signal amplitude, of course, is also proportional to the depth of the recorded material. That is, proportional to the strength of the magnets recorded upon the tape. The greater the strength of these magnets and the larger the dimensions of the replay head, the greater will be the amplitude of the signal across the winding.

From this, it follows that a single-track recording would give a somewhat greater replay head signal than, say, a $\frac{1}{2}$ -track recording of

Since the overall length of these two magnets is equal to the recorded wavelength of the audio signal, it follows that length here is a major parameter of signal information. That is, indeed, true, as the length decreases with increase in frequency.

This is straightforward basic theory with which we are probably conversant. The important aspect so far as this article is concerned, however, is that the *width* of the recorded magnets carries no audio information. The basic audio signal pattern is essentially unaffected by the width of the magnets. From this point of view, therefore, the tape could be divided into any number of tracks and still carry isolated

TOWARDS BETTER TAPING · PART 13 · BY GORDON J. KING



MERITS OF MULTI-TRACK RECORDING

similar recorded level, other things being equal. A $\frac{1}{2}$ -track recording would give an even smaller replay head signal under similar conditions.

The reason for this is that the voltage induced across the head winding is directly related to the number of lines of magnetic force that cut the head pole pieces and thus the winding. Here we have the basic dynamo principle where the armature winding is caused to cut the lines of force of a magnet or where the lines of force of the magnet are caused to cut the armature winding. The greater the number of flux lines that cut each turn of the winding, the greater the output voltage. This means, then, that the output voltage can be stepped up by (a) increasing the strength of the magnet and (b) increasing the number of turns of the winding.

SPECIFIC VALUE

The winding of a replay head is designed to provide a specific value of impedance, of course, but a high impedance head has a greater number of turns on its winding than a low impedance head, and it is for this reason that a high impedance head always gives a higher signal voltage output than a head of low impedance. In practice, the signal from a low impedance head is generally stepped up by a matching transformer possessing a step-up ratio from the head to the input of the amplifier, but this is another story.

Now, when a tape is recorded, the record head imparts upon the oxide surface of the tape two magnets for each full-cycle of signal, as shown in fig. 1. This happens because when the current in the head winding rises, say, on the positive half-cycle of signal, the head pole pieces either side of the gap become polarised magnetically as shown in the drawing, while on the subsequent half-cycle the polarity reverses.

Thus, while the polarity of the pole pieces is alternating, the tape is passing the gap and magnets of north-south, north-south and so on are produced on the tape.

information, provided heads are available to handle the small-width magnets.

Nevertheless, the width of the recorded magnets is important so far as signal noise ratio and signal output voltage are concerned. Fig. 1 shows that the tape magnets are truly representative of the classic bar magnet. A bar magnet produces lines of force in a pattern similar to those depicted in fig. 2. The dimensions of such lines of force is governed, as we have already seen, on the strength of the magnet, and the strength of magnetism that can be imparted to a piece of magnetic material is considerably dependent upon the dimensions of that material.

Since the magnetising field so far as tape is concerned emanates from the pole pieces across the head gap, it follows that the greater the length of the gap (i.e., the wider the track), the greater will be the strength of the magnetism imparted to the tape.

Clearly, then, a single-track fully-recorded tape will give considerably more replay head voltage than a fully-recorded $\frac{1}{2}$ - or $\frac{1}{4}$ -track tape. This is simply because on playback the wider track will result in a greater number of lines of magnetic force cutting the head pole pieces than a narrower track recording. We have thus arrived back to where we started from.

STRONG SIGNAL DESIRABLE

It is always desirable to secure as much replay head signal as possible so as to obtain the best signal/noise ratio. A large head signal means that the tape and circuit noises are adequately masked, thereby improving the signal/noise ratio. Last month we saw that the head signal can be increased by increasing the intensity of the recording. This, of course, can only be taken up to a certain level, after which distortion rises badly. The solution, then, is to employ as wide a track as possible. Half-track recordings give excellent results on both professional and domestic type equipment, as is very well known, but

there is no doubt that full-track recording has the edge on $\frac{1}{2}$ -track, the reason, of course, why it is adopted by broadcast and super-professional operators.

Quarter-track recording can also give very good results, but from the foregoing discussion we can see why this style of tape recording can never be really as good as full and $\frac{1}{2}$ -track recordings.

This, then, brings us to the question of the so-called "compatibility" aspect of $\frac{1}{4}$ -track recorders. Compatibility in this context refers to the ability of this type of machine to play $\frac{1}{2}$ -track stereo or mono tape records. Fig. 3 shows at (a) the gap of a mono $\frac{1}{2}$ -track head relative to a $\frac{1}{4}$ -track (shaded) and at (b) the two gaps of a $\frac{1}{4}$ -track head relative to the same $\frac{1}{2}$ -track tape.

(b) shows that the gaps in the $\frac{1}{4}$ -track head line-up with the two $\frac{1}{2}$ -tracks of the tape, and it is here that the feature of compatibility is displayed. The gaps of the $\frac{1}{4}$ -track head embrace just a little less than a half of $\frac{1}{2}$ -track width. We have seen that from the signal aspect this

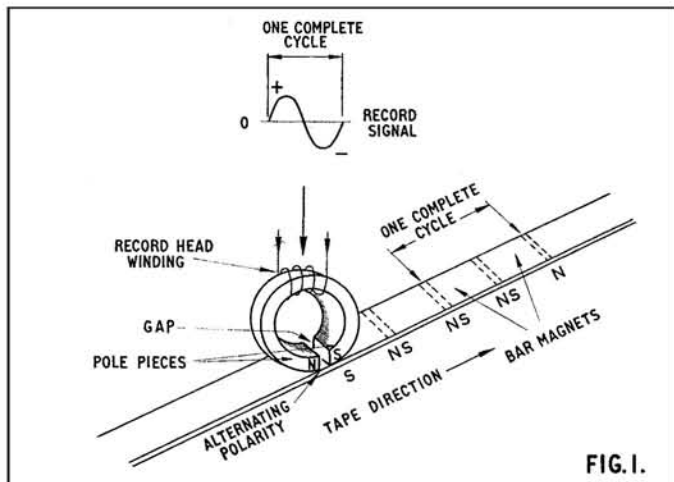


FIG. 1.

is not highly important, for the signal information is complete even over a fraction of the width of the recorded track.

We will now understand, of course, that the effect of the shorter gap covering only a portion of the recorded area will be a lower amplitude head signal because only the corresponding portion of the available recorded magnetic field will be cut by the head pole pieces as the tape passes the gap on playback.


Many tape enthusiasts are disappointed with the relatively poor reproduction that is obtained by playing a $\frac{1}{2}$ -track recording on a $\frac{1}{4}$ -track machine. To secure a reasonable playback volume under such conditions greater amplification is required—calling for a more advanced setting on the playback volume control—and this tends to accentuate whatever inherent noise there is present in the playback amplifier of the recorder and on the tape itself. In other words, the signal/noise ratio suffers, as we have already seen.

REAPPRAISAL OF DESIGN

There is not a great deal that can be done about this, for to improve the playback signal/noise ratio would certainly call for a reappraisal of the design of the first amplifier stage. Moreover, a $\frac{1}{2}$ -track head working in conjunction with a $\frac{1}{2}$ -track tape record is less likely to reveal tape irregularities and dropouts, because with a $\frac{1}{4}$ -track head there is only half the chance of masking such shortcomings!

Early recorders of the $\frac{1}{4}$ -track variety were more prone to the shortcomings referred to above. With the progressive improvement in both equipment and tape, $\frac{1}{4}$ -track recording nowadays can produce quite good results; but if the same improvements are afforded to $\frac{1}{2}$ -track machines, then with $\frac{1}{4}$ -track recording one still cannot achieve the same standard of quality as obtainable from $\frac{1}{2}$ -track recording. Nevertheless, there is a great deal to be said for $\frac{1}{4}$ -track recording in terms of tape economy and for the versatility of the $\frac{1}{4}$ -track machine itself.

One big advantage of the four-track machine is the extra head facility. A $\frac{1}{2}$ -track recorder usually has just a single head and winding, for this is all that is necessary to cover half the tape at a time. A $\frac{1}{4}$ -track machine, however, has two head sections and separate windings and

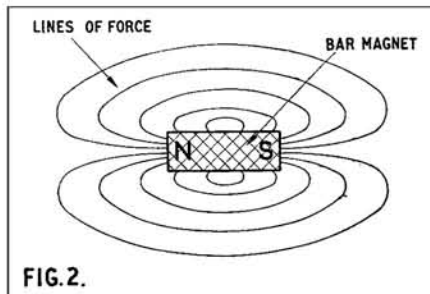

Diagrammatic representation of force field surrounding a bar magnet


FIG. 2.

for normal mono applications only one head is in use at a time. This means that the other head is available for either recording or playing back simultaneously on a second track. Let us see just what can be done in this respect.

On many $\frac{1}{4}$ -track machines the replay head not in use at the time is either terminated across a socket or connected in parallel with the head in use by means of the track selector switch (some machines have a position which puts both heads in parallel) or on machines with press-button track selection by depressing two keys at once. This method of parallel connection means that the output from two tracks can be applied simultaneously to the playback amplifier.

POPULAR EXPLOITATION

A popular exploitation of this facility relates to the combining of, say, the music on one track with a home-recorded vocal on the other track or sound effects on one track with speech or drama on the other track. The output from the speaker is then a combination of the two recordings. This is worked in practice by making the main recording first on one track, running the tape back to the start of this recording, switching to the second track and then on that track recording the material it is required to combine with the main recording. The tape is then again run back to the start of the recordings and, with the machine switched to "playback", either one of the recordings or

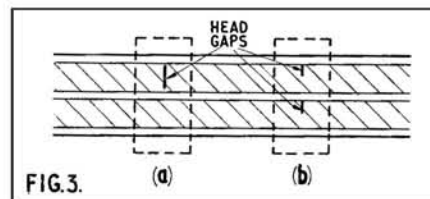

Half and quarter-track heads relative to half-track scan.

FIG. 3.

both of them together can be reproduced, depending upon the setting of the track selector switch.

Here, then, we have a much more sophisticated method of superimposition. Each recording can be made under optimum conditions and two are effectively mixed at the input of the replay amplifier.

Moreover, with this method it is possible to monitor one track while the other track is being recorded. This is accomplished by utilising the head not in use during the time that the second recording is being made to monitor the first recording! This generally means that a small preamplifier has to be connected to the head in use to monitor the first recording so as to lift the weak head signal sufficiently to work a pair of headphones or stethoscope earphones.

The first recording can then be clearly heard. If this is background music, say, for a vocal, then the vocalist will have no difficulty in achieving perfect synchronism, a factor which can cause quite a problem when such an exercise is attempted by simple superimposition. Incidentally, this is the basic technique adopted by professionals for multiple instrumental recordings and for self-sung duets.

Small transistorised preamplifiers are available commercially for the job of stepping up the weak head signal. The output is sufficient to work a pair of headphones, as mentioned, or for driving a hi-fi amplifier or even for connecting to the pickup sockets of a radiogram or radio set. It is by no means outside the scope of the enthusiast to build a preamplifier of this kind at home, and it is hoped next month to provide details of such a project, along with more information towards better $\frac{1}{4}$ -track recording.



Why Kodak P.300 tape gives you better high frequency response at low speeds

When you record at speeds below $7\frac{1}{2}$ ips, noticeable high frequency losses will occur, whatever your equipment. But now, with Kodak P.300 Triple Play Tape, you can bring these losses to a lower level than ever before. That's because Kodak P.300 Tape has been specifically designed for low-speed operation and incorporates 'gain' at high frequencies. This enhanced high frequency response at low speeds has not been achieved at the expense of the tape's other features. Its combination of exceptional wavelength response, signal-to-noise ratio and low distortion cannot be equalled by any other triple play tape in the world. What's more, print-through is up by only 1dB on standard play tape. Yet these are not your only benefits. The oxide coating on Kodak P.300 tape is accurate to within *millionths* of an inch, providing incomparable uniformity of output. And this uniformity, together with the flexibility of the specially

treated base material, gives you complete freedom from drop-out — an important advantage in both low speed and quarter-track recording.

But you be the judge. Try Kodak P.300 Triple Play Tape for your next recording and hear for yourself.

© Eastman Kodak Company MCH:XXI

Post this coupon today
Please send me full technical data on
Kodak P.300 Triple Play Tape.

NAME.....

ADDRESS.....

.....

Kodak Ltd., Dept., 70, Kodak House, Kingsway, London W C.2

6

Kodak sound recording tapes — the best tapes in the world

TECHNICAL NOTES

Perspective

(Scene 1) Both actors start by facing away from the microphone; they turn slowly towards it while speaking.

Note that Sir Gregory turns away briefly and then turns back. This imparts a sense of movement. Use this technique whenever dialogue can be improved by it.

(Scene 2) The actors start at a close-mike voice-position. Create Sir Gregory's movements (fetching the oil-can, etc.) by the turn-away-and-turn-back technique mentioned above.

Mr. Jones's footsteps encircle the imaginary room—i.e., they start from, and return to, the mike. In reality, Mr. Jones remains at a close-mike voice-position. He only turns away to descend the imaginary staircase. His cry for help must "descend"—i.e., decrease in volume—so he steps quickly to a distant voice-position. Sir Gregory remains at the mike.

Acoustics

(Scene 1) Use a large, empty room or hallway; or sitting-room with carpet rolled up.

(Scene 2) Use a "dead" location to contrast with the former acoustic. Unroll the carpet and draw curtains—or move into a very small room.

Sound-effects

(Scene 1) Subdued footsteps accompany the characters' approach.

(Scene 2) A selection of ironmongery will yield some suitable clanks. Increase resonance by clanking items inside deep wooden box.

Oil-can: produce orally, clicking the tongue.

Mr. Jones's armoured footsteps: fill two small tins with coins and pebbles, etc. "Walk" them over flat surface.

The last effect: run down a passage, clanking one heavy bucket inside another. Finish by pushing over a precarious pile of kitchen-ware. If preferred, work on this effect separately and splice it into the dialogue.

said nothing whatsoever about a suit of armour.

SIR GREGORY: It's the best idea I've ever had!

JONES: Sir Gregory, I understood that I was to act as an ordinary door-keeper.

SIR GREGORY: (*relentlessly*) Come along, Mr. Jones—it's nearly half-past two! I must get you encased as soon as possible.

JONES: (*shrieking*) Encased? Let go of me! What's going to happen? Where are we going?

SIR GREGORY: Don't hang back, Mr. Jones! We're only going upstairs to my little workshop. Come along!

JONES: (*protesting*) Sir Gregory! Sir Gregory!

(*Fade out on last line*)

(*Fade in. Scene 2: the workshop. A brief succession of mallet-blows upon metal.*)

SIR GREGORY: You're nearly done. Lift up your arms, will you? I just want to fit the shoulder-irons to the breastplate.

JONES: (*plaintively*) Had I known I was to wear a suit of armour, Sir Gregory, I would have come prepared. I would, for example, have worn my big red sweater. This breastplate is distinctly chilly.

SIR GREGORY: (*preoccupied*) Lower your arms, Mr. Jones.

JONES: And I would have worn a thicker pair of pants.


SIR GREGORY: All you need now is the helmet. Here we are . . . this fits over your head—like this. [*clank*] We'll leave the visor up, of course. (*coaxingly*) Try walking round the room to exercise your legs. (*pause*) Go on!

(*We hear slow, heavy clanks as Jones labours round the room. He gradually comes to a stop*)

JONES: (*sulkily*) The knees are stiff. So are the ankles.

BY DAVID HAINES

situation vacant

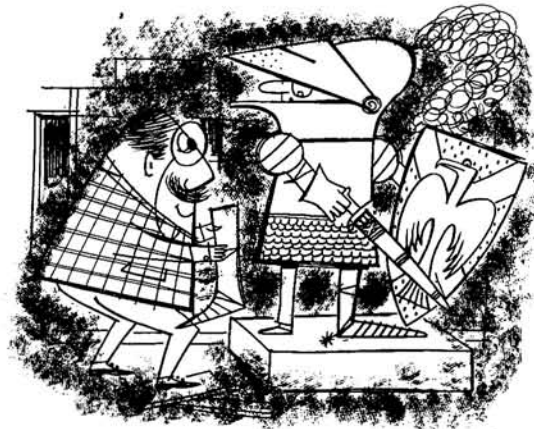

ANNOUNCER: We present a short play entitled *Situation Vacant*.

(Scene 1: *echoic hall. Sir Gregory and Mr. Jones approach while talking and halt nearby [i.e., at close-mike]*).

SIR GREGORY: (*heartily*) Well, Mr. Jones—I've now shown you the entire house. D'you think you can manage the job?

JONES: (*earnestly*) I'm sure I can, Sir Gregory. I consider it a great privilege to be offered employment in such a noble and historic residence. Furthermore, I—

SIR GREGORY: (*interrupting*) Your basic work is simple. From April onwards, we open the house to the public at three o'clock, closing at seven. You, Mr. Jones, will stand by the front door and issue the tickets. Don't let any of the damned trippers inside unless they pay the five shillings. Is that understood?

JONES: Yes, Sir Gregory.

SIR GREGORY: You remain on guard, as it were, while I conduct the parties round. (*pause*) Have you ever worn a suit of armour?

JONES: (*surprised*) A suit of armour? No, I can't say I have . . .

SIR GREGORY: (*breezily*) Don't worry, Mr. Jones—I'll soon fix you up. [*turning away*] Follow me!

JONES: (*puzzled*) I'm afraid I don't understand.

SIR GREGORY: [*turning back*] Listen, Mr. Jones. You're now in the stately-home business. That means you're in *show* business.

(*with gusto*) The public don't want to see an *empty* suit of armour—they want to see a *knight* in armour! Standing at the front door!

JONES: (*primly*) Sir Gregory, your advertisement in *The Daily News*

SIR GREGORY: Perhaps the joints need a little lubrication. Stand still and I'll get the oil-can. (*crosses room, opens and shuts cupboard; returns*) Now then . . . left ankle (*prink-prink*) . . . right ankle (*prink-prink*) . . . left knee-cap (*prink-prink*) . . . right knee-cap (*prink-prink*). And I might as well do the elbows . . . (*prink-prink; prink-prink*)

JONES: (*with dignity*) It's no use, Sir Gregory—I've decided I don't want the job.

SIR GREGORY: (*outraged*) You don't want the job? After all the trouble I've taken to get you ready? You applied to me for a job—and I've given you a job. Where's your sense of moral obligation? (*sternly*) Take your sword and shield, Mr. Jones—and go downstairs to the front door!

JONES: (*browbeaten*) Very well, Sir Gregory.

SIR GREGORY: And don't forget—it's a spiral staircase. Take extra care.

(*Jones turns away to descend the staircase. Suddenly, he slips and utters a long, drawn-out cry*)

JONES: He . . . l . . . lp!

(*He clanks the rest of the way in heavy but rhythmic diminuendo. Finally, he crashes to a magnificent stop in the distance. Pause*)

SIR GREGORY: (*lifting his voice*) Mr. Jones! Are you all right?

JONES: (*feeble and distant*) I—I think so, Sir Gregory.

SIR GREGORY: Well, I've just remembered. It's Wednesday today—and we don't open on Wednesdays. Come back tomorrow.

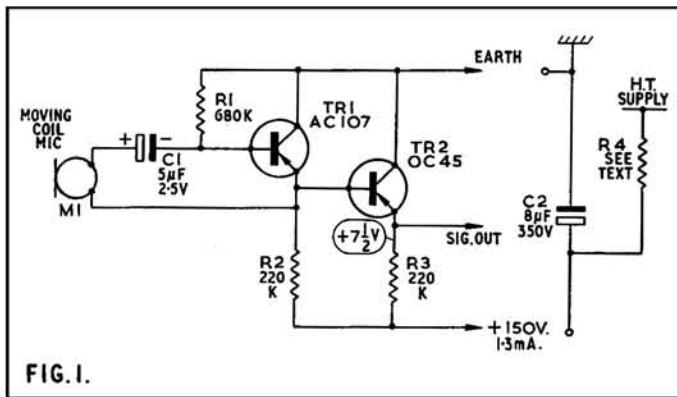
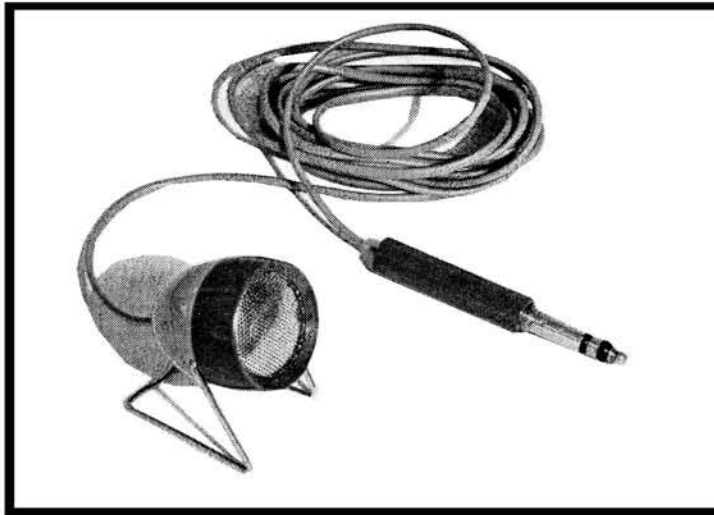


FIG. 1.

MOST commercial tape recorders available at present are supplied with a crystal microphone as standard. Whilst the output of these microphones is high (up to 100mV in some cases) their quality and frequency response are poor and sooner or later it becomes apparent to the owner of the recorder, if at all quality conscious, that a better quality dynamic (moving-coil) microphone would be a good investment. Unfortunately, the output from a dynamic microphone is much lower, and even if an expensive and bulky matching transformer is fitted, this itself may give rise to hum pick-up and distortion, whilst still leaving the input level to the recorder considerably below that needed for full modulation of the tape.

The same applies to the usual range of power amplifiers when they are pressed into service as electric guitar amplifiers, in conjunction with the usual moving-coil, or moving-iron, pickup.

The solution to this is an extra preamplifier: either valved, utilising the existing power supplies from the tape recorder or amplifier if there is a sufficient power reserve; or transistorised, with either a battery or an extra low voltage negative supply.

A transistorised amplifier has many attractions over its valve equivalent, such as low noise and hum, lightness, and low power requirements; but a conventional transistorised amplifier has drawbacks insofar as it needs a low voltage negative supply of its own, which is usually far larger and heavier than the amplifier proper.

An ideal amplifier should have the following characteristics: (1) High voltage gain. (2) Low noise. (3) Low distortion. (4) Can use existing high voltage positive power supply. (5) Low output impedance enabling long leads to be used. (6) Simple to use or remove when not needed. (7) It should not overload if subjected to a high transient (if used for guitar amplifiers). It was with these points in mind that the amplifier was designed.

As can be seen from the circuit in fig. 1, the amplifier consists of two transistors, the first being a low-noise type such as the AC107 or

**HIGH GAIN
MINIATURE
TRANSISTOR
MICROPHONE
PREAMPLIFIER**

BY G.A. STEVENS


A USEFUL AND EASILY BUILT ACCESSORY

GET880. The load resistor has to be inserted in the emitter circuit due to the positive supply, and in order to avoid degeneration due to feedback across the emitter load, the microphone is connected between the base and emitter. The second stage is an emitter-follower to convert the 75K output impedance of the first stage to about 500-ohms. The two transistors are powered by a 150V supply. This value was chosen as the lowest which would be met in a normal valve power supply. Usually, of course, higher voltages would be available, excess voltage being dropped by an extra resistor and decoupled by an 8µF capacitor which are both mounted in the existing tape recorder. The value of this resistor and its required power rating may be derived from the graph given in fig. 2. This means that only three leads need go to the microphone with its amplifier mounted inside, so that twin screened cable may be used. Care should be taken in choosing a capacitor with an adequate voltage rating, for although it only decouples a 150V line, when the amplifier is removed it will receive the full supply voltage, which could be in the order of 350V or so.

ORIGINAL MICROPHONE

In the original unit the microphone used was a cheap Japanese type DM175. This consists of a moving-coil insert feeding a 1 : 5 transformer giving an output impedance of 600-ohms (stated to be 1K by the manufacturers). This means that the insert was of about 25-ohms impedance, and since the manufacturers stated the output (with its integral transformer) was -60dB (ref. 1V), the output of the insert was -74dB. This was confirmed when the output from the amplifier and microphone was found to be about 250V when speaking about 1ft. from the unit. The space which was originally taken by the microphone transformer was used to house the amplifier, making a small and very neat unit.

Since the space is very limited it is recommended that the layout given

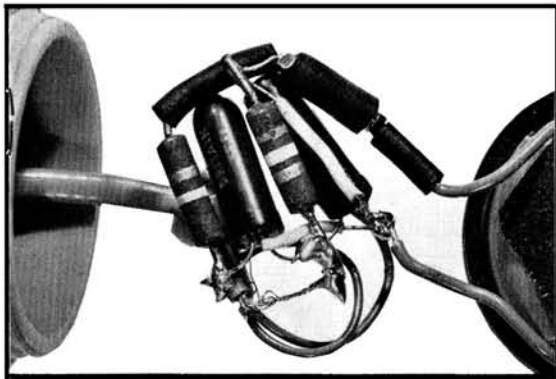



A USEFUL AND EASILY BUILT ACCESSORY

by fig. 3 be used for the DM 175 microphone. Other, larger, microphones would not need such careful attention to space, and layouts could be varied to suit individual requirements.

Since the original unit was built, other microphones have been tried and the quality found to be excellent and not degraded by the circuit in any way. With the least sensitive type the output was in the order of 100mV.

The sensitivity of the various types of dynamic microphone is given typically as follows (See *Radio Designer's Handbook* by Langford Smith, Chapter 18, Section I).

Moving-Coil	—49 to —70dB	relative to 1V for 10 dyne cm ²
Pressure Ribbon	—61 to —65dB	" " "
Velocity Ribbon	—58 to —67dB	" " "

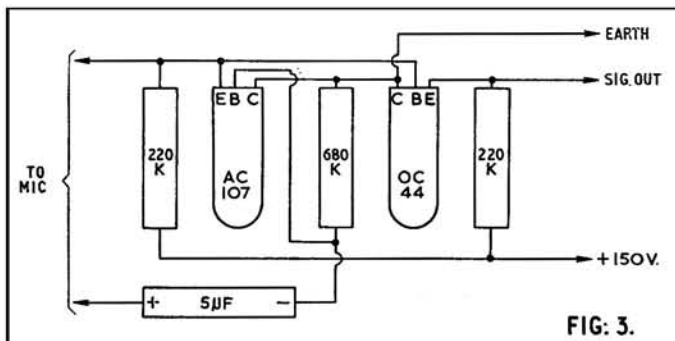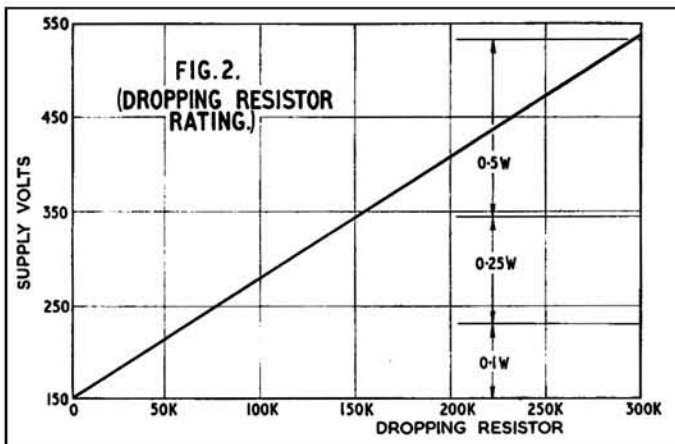

These sound levels correspond to a normal speaking voice 12in. from the microphone.

Since the input impedance of the microphone is about 600-ohms, a microphone with an impedance greater than this will suffer an insertion loss when connected to the amplifier. Since the higher impedance types will have a relatively higher output, this will tend to offset the initial loss, provided the ratio of the amplifier and microphone impedances is not too large. Also, since with larger input levels transistors change their input impedance, in order to avoid distortion it is usual to drive them from a high impedance source to achieve a constant current source. The higher impedance microphones achieve this, although since their output level is still relatively low, distortion would in any case be very low. From the above table it can be seen that the output from a dynamic microphone (or good quality guitar pickup) is in the order of —65dB or about 0.5mV. This means that the output from the amplifier would be about 0.5V. Now the maximum output from the amplifier into a high impedance is about 5V; at this point the transistor bottoms and flattens the output waveform. This means that there is a 20dB difference between the normal and peak outputs, which should be adequate to handle the high peak transient levels associated with guitar amplifier practice.

Whilst considering the output impedance, it should be noted that for music containing high transients it is necessary that the impedance into which the output of the amplifier is fed should not be less than 10K. This is because, although the output impedance is low, so is the current going into the output transistor, leaving little current to spare with which to drive an external load. This does not affect the capabilities of the amplifier to feed a long capacitive screened load, since at high frequencies, where capacitive losses are serious, the signal component would be low and little current would be needed to drive the stray capacities.

SPECIFIED COMPONENTS

It is important that only the specified components are used since, as a 150V supply is used, the spreads of characteristics and high leakages associated with the cheaper transistors available would completely upset the operating points of the transistors and probably give very distorted outputs, if any at all. As stated, the input transistor can be either an AC107 or a GET880; the latter—being a closer tolerance industrial type—would be more rugged, particularly if the unit is liable to be used at higher temperatures. The input capacitor should also be checked to see that it does not have an excessive leakage current which could again upset the biasing point of the input transistor. If difficulty is experienced, a complete kit or individual items may be obtained from the supplier named at the foot of the component list.

The amplifier has now been in use for a considerable time and has given excellent quality and no trouble whatsoever, and I have now constructed several more using some expensive microphones with equal success. The only word of warning is in the choice of a plug for the unit. If a standard GPO Jack is used (as it was in one of the units which have already been built) the HT connection should be made to the tip of the three-way jack socket. If this is not done, the HT will be applied directly across the output transistor when the jack is half inserted. With all other types of plug no such precautions are needed, and the modern 3-pin or 5-pin Continental type plugs are ideal for this purpose.

COMPONENTS LIST

R ₁	680K	1/10W
R ₂	220K	1/10W
R ₃	220K	1/10W
R ₄	See fig. 2	
C ₁	5μF	2.5V (Mullard Type C426AN/A5)
C ₂	8μF	350V
TR ₁	Mullard AC107 or GET880 transistor.	
TR ₂	OC44-45 transistor.	
M ₁	Dynamic microphone, DM175 in original.	

Length of twin screened microphone cable.

3-pin plug and socket (Continental type).

All the above components may be obtained individually or as a complete kit from:—

North Western Electronics,
283 High Street,
Berkhamsted, Herts.

"Q"-CORD

R119K 33 Gns **NOW 29 Gns** } Complete with : dual imp. mike,
 203 34 Gns **NOW 29 Gns** } 200/50. 1200' TP tape, empty 4½" spool, radio, lead, batteries, cct and instruction book.

60-10,000 c/s ± 3db. sig/noise 38db. below test level weight 5lb. 50db. below peak.

3½ I.P.S. NARTB standard, wide tone control, 4½" spools, over 2 hours recording time, 2-track. Heads by Bogen, AC bias and erase. Straight through amplifier.

Accessories, headphones, remote control mike, foot control accumulator, mains adapters, 110V—240V AC.

Delivered anywhere in the U.K. carriage and insurance paid.

6 months FULL GUARANTEE—**NO LABOUR COSTS.**

NO INCREASE!!! Reduced 15%. Both machines "NOW" 29gns.!!! Hurry whilst present stocks last!!!

We are passing on to you the benefits from our anticipation prior to the surcharge!!! Still supplied with all basic accessories.

Write now for full details to :


C. Braddock Limited

266 Waterloo Road, Blackpool, Lancs.

Telephone : 45049

BUY A Bib

THE PROFESSIONAL TAPE SPLICER

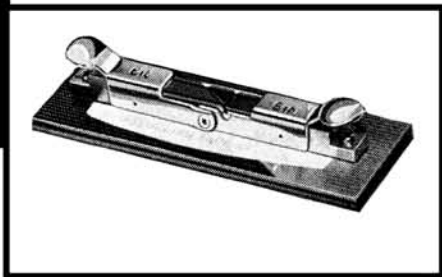

—The most reliable and easy to use.

All metal—beautifully plated—compact in size—mounted on flock covered base. Easily and permanently attached to your tape recorder. Ferrograph, Vortexion, Reflectograph and Wearite decks already have fixing holes for the Bib splicer.

Clamps hold the magnetic or leader tapes in the precision cut channel—no danger of damaging the edges—most important with 4 track recordings. Right angle and oblique cutting slots are provided to facilitate editing to a syllable.

The Bib tape splicer saves tape and makes editing a fascinating hobby.

More Bib splicers have been sold in recent years than any other make. It is incorporated in the "Scotch" Tape Accessory Kit and is used by recording studios and broadcasting organisations.

MULTICORE SOLDERS LTD.

MULTICORE WORKS, HEMEL HEMPSTEAD, HERTFORDSHIRE

Complete with
razor cutter
only 18/6

CHMS 13

YOU OWN A GOOD TAPE RECORDER

So insist on obtaining the best sound reproduction from it, and to do this is by getting a Lustraphone Microphone.

A wide range of models both ribbon and dynamic is available.

For full details contact

LUSTRAPHONE LIMITED (Dept. TR 4)

St. George's Works, Regent's Park Road, London, N.W.1.

Telephone : PR1mrose 8844/5/6

Synchrotape

BRAND

HIGH FIDELITY RECORDING TAPE



BRITAIN'S FINEST VALUE IN
P.V.C. RECORDING TAPE
STANDARD, LONG, DOUBLE & TRIPLE PLAY




Adastra Electronics Ltd 167 Finchley Rd. London NW3

EIGHT millimetre sound now comes under three main headings: *Magnetic-stripe* where sound and picture are carried on the same spool of film; *Double-band* where perforated tape is run by the same motor that drives the film; and *Separate-tape* with synchronising link between tape recorder and silent projector. Strobe-control is really outdated and very few people now rely on this rather laborious method of hand control.

Most tape synchronisers on the market are efficient to a point and will supply satisfactory synchronisation for commentaries and music but will fall down where lip movement synchronisation is concerned. Nowadays, more than this is needed, for appetites have been sharpened by seeing what magnetic-stripe can do in this field. The separate-tape man now wants lip sync but he wants to achieve it without altering his

down to rest stationary for a fraction of a second behind the lens to record an image, so during projection the film must be pulled down in the projector gate for the same fraction of time to project the image on to the screen. The impression that the human eye retains is held for a split-second longer than the picture lasts on the screen, this impression being imposed on the following picture. This *persistence of vision* creates an illusion of constant movement although every single frame in the film is held rock-steady while a three-bladed shutter (with 16 fps) is moved across the picture to interrupt the light beam. The movement of the shutter is picked up by a photo-transistor housed in a lens-hood fitting which is clipped over the projector lens. The flickers are converted into pulses by the photo-transistor and these pulses are fed into an amplifying and pulse shaping circuit, so that

THE CONTRONICS CINESOUND SYNCHRONISATION SYSTEM

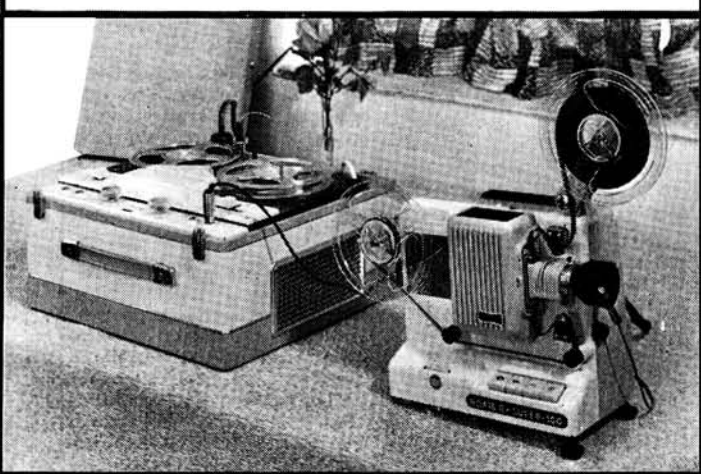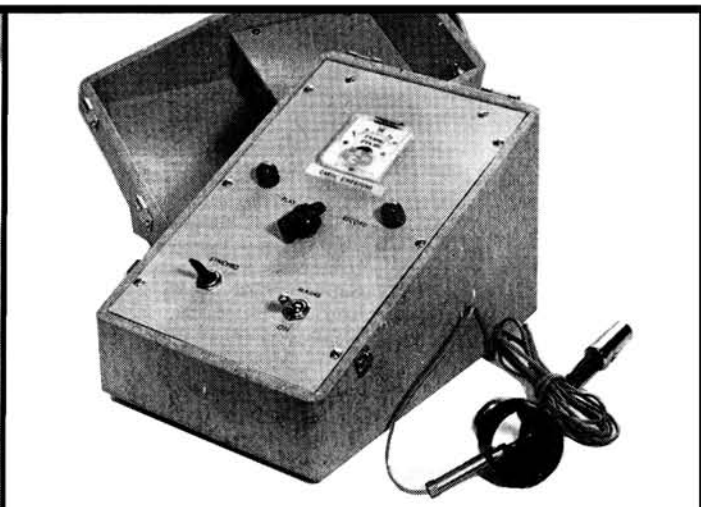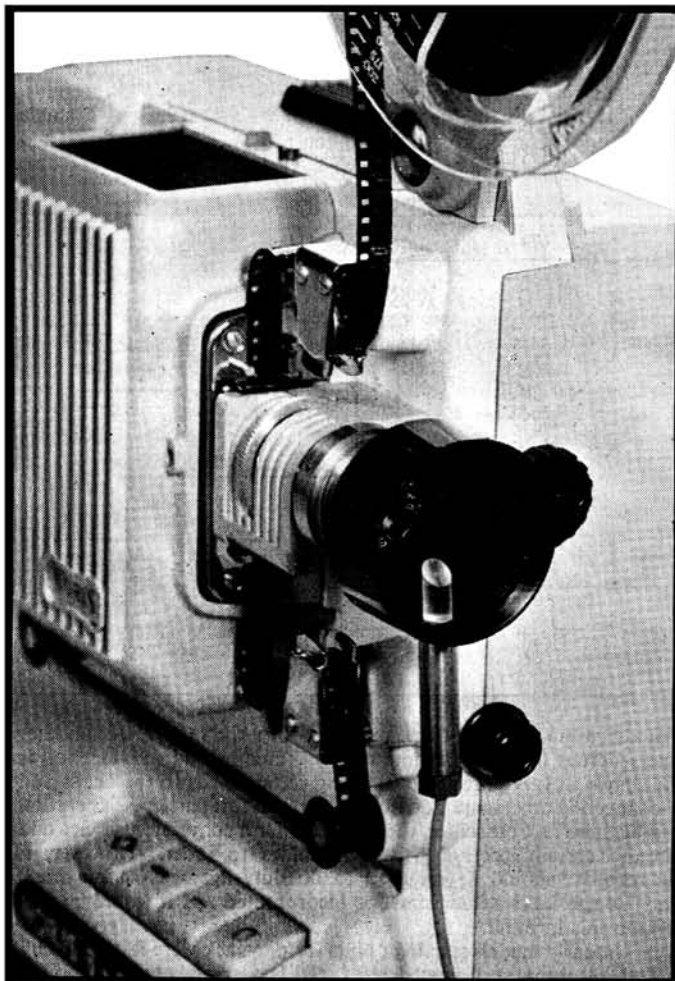

EXAMINED BY RICHARD GOLDING

system too drastically. To meet this need, *Contronics Ltd.*, Garth Works, Deepcut Bridge Road, Blackdown, Aldershot, Hants., have now developed an extremely efficient pulse unit—the “*Carol*” *Cine-sound*—which is supplied in two different forms; a small compact control unit which can be used with an existing $\frac{1}{2}$ -track tape recorder; and a $\frac{1}{4}$ -track tape recorder with a built-in control unit.

The pulse system used is not to be confused with any of the professional systems which employ once-per-frame contacts on either the camera drive or the projector drive. *It is designed for post-synchronisation only* and it works on an entirely different method by taking pulses from the moving pictures themselves. Basically this is not a new idea but it is the first time that it has been perfected and developed for amateur use.

The idea is simple. As in the cine camera, the film must be pulled

Left: Photo-transistor hood mounted on Noris projector.

Top: Model CS/1 synchronising unit costs £25.

Bottom: The TR/7 recorder with integrated sync unit; price £45.

despite the considerable variation in light intensity of the different frames the final output remains of the same amplitude. At the same time, these pulses also feed a tachometer circuit so that the actual speed of the projector may be read on a meter built-in to the control unit calibrated in frames-per-second.

On playback of the recorded sound, the photo-transistor pulse circuit is switched to feed a flip-flop circuit where pulses from the projector switch the projector motor off, and pulses from the tape recorder switch the motor on. The flip-flop circuit can only be in one state at any one time and if the projector motor tries to speed up then the time between the pulses decreases and the motor is momentarily switched off. Conversely, if the projector slows down the “off” pulses

(continued overleaf)

For a REALLY high standard of performance . . .

. . . buy a Brenell tape recorder. Whether you choose the basic MARK 5 Series 2, the more advanced MARK 5 Type M or the STB1, with its many features and facilities, all are capable of giving magnificent results combined with the famous Brenell reliability. Compare these specifications with any other tape recorder on the market :—



Mk. 5 Series 2


4 tape speeds $1\frac{1}{2}$, $3\frac{1}{2}$, $7\frac{1}{2}$ and 15 ips • frequency correction at all speeds • 3 motors (capstan drive - hysteresis synchronous) • low wow and flutter content - .05% at 15 ips, .1% at $7\frac{1}{2}$ ips, .15% at $3\frac{1}{2}$ ips, .25% at $1\frac{1}{2}$ ips • 4 watts power output • monitoring and superimpose facilities • $8\frac{1}{2}$ " dia. reels • Mk 510 for $10\frac{1}{2}$ " dia. N.A.B. reels • fast rewind (1,200ft. in 45 secs) • digital revolution counter.



Mk. 5 Type M

as Mk. 5 Series 2 PLUS:-

Separate record and playback heads and amplifiers • recording level meter • tape monitoring while recording • separate bass and treble controls • superb finish.



STB 1

Especially designed for use with external High Fidelity amplifiers • Mono/stereo record/playback facilities with twin recording and twin playback pre-amplifiers • immediate comparison of original and recorded signals • adjustable bias level • playback facilities for $\frac{1}{2}$ and $\frac{1}{4}$ track mono/stereo tapes • sound-on-sound facilities • 2 edgewise meters for recording level, tape output level and bias level.

For full details of these recorders write to the sole manufacturers :—

Brenell

BRENELL ENGINEERING CO. LTD.
231/5 Liverpool Rd., London, N.1
Telephone: NORth 8271 (5 lines)

Please note our new address


CONTRONICS CINESOUND CONTINUED

cease to function for a fraction of a second thus allowing the motor to catch up again. The whole effect is to balance the pulses from the projector precisely midway between those from the tape recorder.

In practice this does work and as the three-bladed shutter gives forty-eight periods of light and dark per second, synchronisation can be achieved to one-third of a frame.

With the Cinesound TR/7 which is a double-channel tape recorder fitted with $\frac{1}{4}$ -track heads (the 'spare' head segment is connected to the built-in pulse unit) there is just a little trouble in setting up. Whereas the manufacturers state quite truthfully that there is no mechanical link, there is a small electrical modification to be made. The projector must have a variable-speed control capable of allowing the motor to run faster than 16 fps, and wires from the Cinesound must be connected into this. For most projectors this is a fairly simple job and complete instructions are issued for a number of current models. When testing, I used a *Eumig* and a *Bolex* projector and found my easiest way was to mount a lamp socket on the side of each projector so that I could plug the control in or out at will. At its worst, the whole operation should take no more than half an hour and, if a socket is mounted, each subsequent setting up should take only a few seconds.

This is not so with the other unit—the CS/1—which is a single control unit designed to work between a $\frac{1}{4}$ -track tape recorder and the silent projector. The CS/1 needs the above modification and also

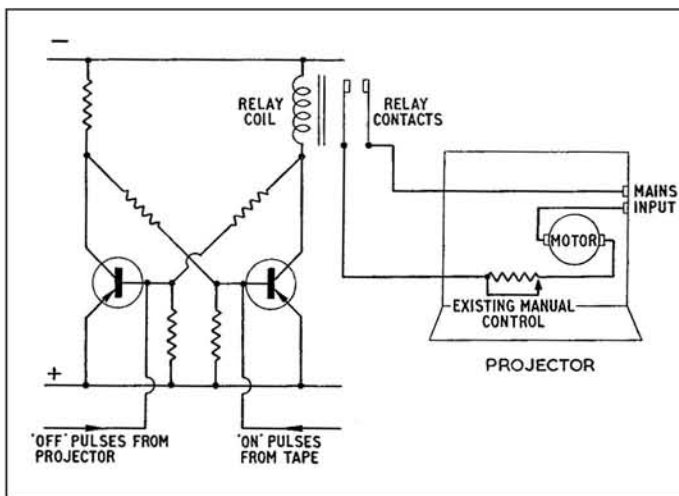

a modification to any $\frac{1}{4}$ -track recorder other than the TR/6 (another tape recorder in the Contronics range). This second modification is not simple as it requires disconnecting certain leads to the heads and re-connecting others and I do not recommend this particular operation to a beginner. Contronics, themselves, offer a conversion service and can alter certain existing $\frac{1}{4}$ -track machines to order. However, if the recorder should be required to do duty again as a four-track machine special switching must be incorporated and it would be well to keep this in mind.

On the early models starting points for playback were fairly difficult to find, resulting in a great deal of trial and error before one found sync. Now all models are fitted with an Auto-start facility, which, when momentarily depressed, sets a relay to switch off the mains from the projector. When the tape is started, the first pulse which comes along will automatically release the relay and start the projector. When making a recording it is easy to start the projector at some precise point so that the first pulse will come at the required point of the commentary. On playback, the film is laced in the projector so that the precise starting frame is in the gate. The Auto-start button is now depressed and after this the projector is switched on without it commencing to operate. The tape is now started and, with the first sound, the projector automatically starts up.

It is all fairly straightforward providing all the instructions are followed faithfully but I would hardly advise anyone to take on the job single-handed. It is a two-man operation and it needs a great deal of practice. The system can, however, produce perfect results and can allow, with the use of extra equipment, the production of complicated composite tracks to the very third of a frame.



recording bird song

PART ONE

PARABOLIC PROBLEMS

BY A. G. FIELD



THIS is the first of two articles intended for the ordinary recordist who would like to collect bird song but perhaps feels uncertain about identification and the recording method.

Much of the harshness and distortion one often hears with recorded bird song can be traced to the mis-use of a parabolic reflector. A reflector can boost high audio frequencies unduly and tends to produce an edgy sound which is just not true to nature. This may be useful for some types of sound effect but is most objectionable for bird song recordings. Such recordings are difficult to replay satisfactorily, demanding high quality equipment and wide-range tone equalisation.

It is, however, possible to overcome this vice with a minimum detraction from the reflector's many virtues.

First I shall list the three types of fault most likely to trouble the bird recordist.

Sibilant Splash : Cause—excessive high frequency signal reaching the recorder due to poor low frequency response of the reflector. Remedy—treat the parabola as shown in fig. 1. Use a good moving-coil microphone. Record at a lower level.

Intermodulation Distortion : This causes spurious low frequency sounds and a muddy effect; it is the most serious form of distortion. Cause—overloading the amplifier or preamplifier, or a faulty amplifier. Remedy—try recording at a lower level and if still troublesome repair amplifier.

Electrical Motor Interference : Cause—faulty motor or suppressor, or poor design, aggravated by under-recording. Remedy—record at a higher level. Use a microphone preamplifier such as the *Walgain*, kept well away from the recorder. Repair defective motor or suppressor.

A good recorder should have none of these troubles. It will be seen that most forms of distortion are caused by heavy modulation. In general, with most types of bird song it is not advisable to allow a VU-meter to move above half the level suggested in the instruction book. Bird song fundamentals can run up to nearly 10 Kc/s and very high notes are boosted in the recording process, so that risk of overload is considerable. It may be thought that orchestral music would be more difficult to record as frequencies run up to nearly double

this figure. The very high frequencies in such music are not fundamentals but overtones and are therefore at a lower volume level and do not usually cause trouble.

The ideal machine for bird recording should be able to cope with frequencies up to 10 Kc/s at $7\frac{1}{2}$ i/s and 8 Kc/s at $3\frac{3}{4}$ i/s without audible distortion. It would, of course, be battery driven. A good quality low impedance microphone is desirable, permitting the use of long leads, but it must, of course, be made to match the recorder.

A parabolic reflector is almost essential, since it enables the recordist to keep his distance from the subject, which might easily be frightened away. This is not to say that normal microphone technique cannot be applied. Ludwig Koch, for example, a well-known broadcaster on birds and bird recording, obtained a large collection of bird song without resort to a reflector.

A diameter of 2ft. is the usual compromise between portability and reflective efficiency. The poor middle and low-frequency response, overcome to some extent with the modification already mentioned, is caused partly by the curvature of the reflector itself and partly by the wavelength of sounds at these frequencies exceeding the diameter of the reflector. It will be found very difficult to aim a reflector correctly without earphones.

I will now suggest ways in which the reflector can be improved.

First, the sight and aiming hole in the reflector should be raised by one inch (see fig. 1) to allow room for the microphone filter without obstructing the view of the aiming sight.

Next, we line the whole of the inside of the reflector with a green baize material such as *Con-Tact*. This baize has an adhesive plastic back and is like a very close-grained velvet. Microphone holder and stem should also be lined with the same material. The redundant viewing hole is covered with this material.

A quantity of cotton wool is dyed green and pads of three different thicknesses are made of this material by holding it together in small muslin bags. These are used one at a time as microphone filters. They are held in place by Terry Clips gripping the microphone holder stem, the base of the clip being sewn to the bag. The thin filters are

(continued overleaf)


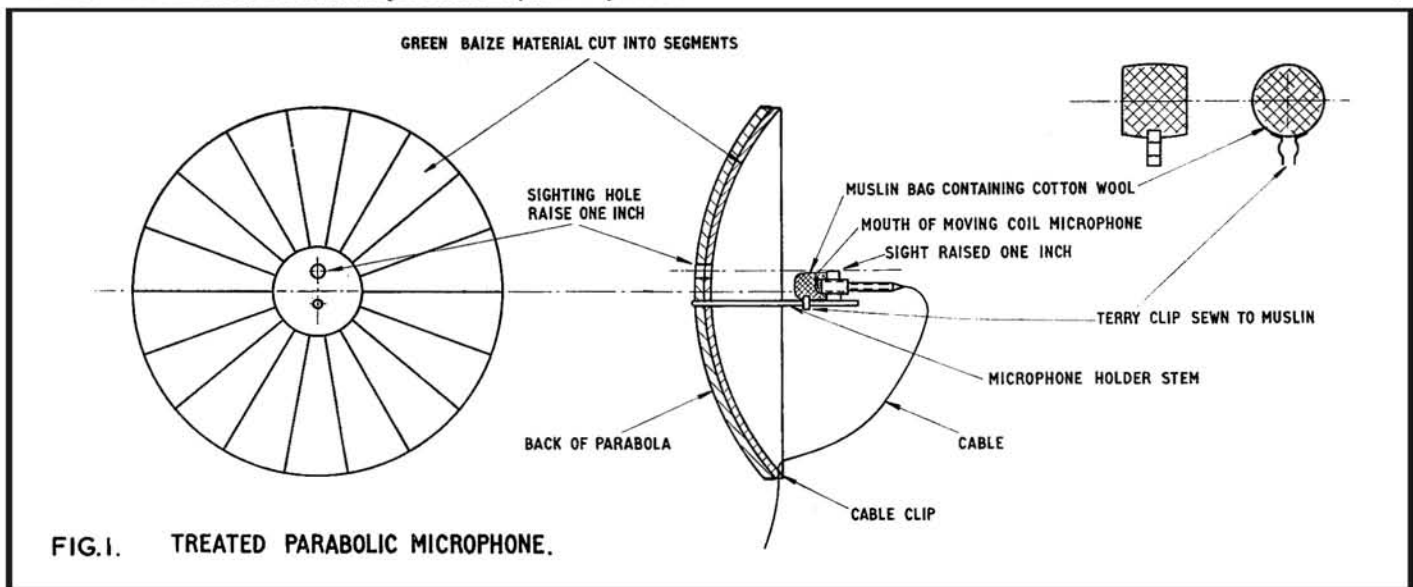


FIG. 1. TREATED PARABOLIC MICROPHONE.

● You're Guaranteed a Better Deal
When you **PART EXCHANGE**
Your **TAPE RECORDER**
with **R.E.W**

A friendly welcome awaits you at our bright showroom extension. Here you will find a lavish array of equipment at every price level . . . make your choice for immediate delivery or if you cannot visit us, the fast and friendly R.E.W. Mail Order Service makes it easy for you to enjoy the professional results only possible with an advanced Tape Recorder. Get in touch with us Now. We have thousands of satisfied customers and a reputation for generous part exchange, reliability and specialist service.

MACHINE OF THE MONTH
FERROGRAPH 5 A/N
PRICE **85** gns.

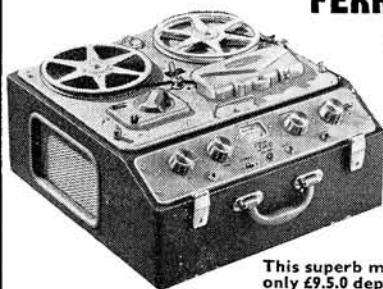

The magnificent Ferrograph 5 A/N, complete with its own superior quality elliptical speaker.
Speeds $3\frac{1}{2}$ and $7\frac{1}{2}$ i.p.s.
Separate tone controls for bass and treble cuts
Frequency response ($7\frac{1}{2}$ i.p.s.)
40-15,000 c.p.s. +3 db.

This superb machine can be yours NOW for only £9.5.0 deposit (and 12 monthly payments of £6.13.4, or 18 of £4.13.4, or 24 of £3.13.6).

You're guaranteed maximum satisfaction with the R.E.W.
"PLUS FIVE" SERVICE

- Generous part exchange allowances.
- No interest terms—lowest deposits.
- Off-the-shelf delivery from the biggest range under one roof.
- Free servicing and free delivery.
- Optional personal insurance.

INTEREST FREE TERMS

Take your pick from our Wide range and have any machine you want for 10% deposit, balance twelve months and no interest charged. (18-24 months H.P. terms also available.)

400 MACHINES ON DISPLAY!

Call, see, hear and choose the Tape Recorder you've always wanted from one of the biggest ranges anywhere. Just about every model for off-the-shelf delivery.

PART EXCHANGES

We make a feature of generous part exchange facilities for Tape Recorders or Hi-Fi Equipment. Get the machine you've always wanted—and get the best possible exchange deal from us!

CASH FOR YOUR TAPE-RECORDER OR HI-FI. Highest cash offers for good equipment . . . get in touch today!

OPTIONAL INSURANCE at nominal rates against unemployment, sickness or accident during term of H.P. agreement. Premium 6d. in the £—gives cover over two years.

Bargain Basement

We have an unrivalled stock of new and used machines at unbeatable bargain prices—30%-60% reductions at original prices! Make a point of asking for our Special Bargain List.

Home demonstrations in the London area gladly arranged. By return enquiry service Agents for all makes.



R.E.W
(Earlsfield Ltd.)

Mail Order Department
266/268 (TR) Upper Tooting
Road, London, S.W.17.
Telephone: BALham 9174-5

RECORDING BIRD SONG CONTINUED

intended for long range or indirect shots while the thick one is intended for fairly close direct shots where the bird can be plainly seen. These filters limit but not entirely suppress high frequency sound (see graphs in fig. 2).

Modifications made, an expedition can commence. Coming up the hill we reach a pine wood. A breeze is blowing here, making a low sighing noise in the pines. A Coal Tit sings with his needle sharp voice "if-hee . . . if-hee . . . if-hee . . ." We have little hope of success as the wind seems likely to swamp all sound. A filter is placed on the microphone; the song can now be plainly heard over the 'phones.

We move on and try to record a Skylark, but an aeroplane thwarts us. An attempt at a Willow Warbler is defeated by a flock of noisy town Sparrows.

We now come to a quiet spot where a strange bird is singing an interesting song as he flies up in the air and glides down to his perch in the top of a tree. Many good runs of song are recorded by following his flight in the parabola sights. What type of bird is this? We haven't a clue.

Arriving home, the recordings are played. Out comes a beautiful wood-wind voice—pity about the aeroplanes. Next comes the Song Thrush. This is really beautiful with the sound reflecting off the trees and adding depth and atmosphere to the recording. Pity we forgot to fade down though. Next comes the Coal Tit. The wind in the pines

AVERAGE MODULATION CURVES ($7\frac{1}{2}$ I/S.)

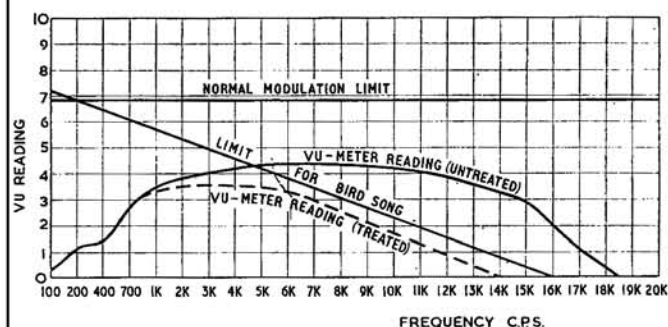


FIG. 2.

sounds quite loud but the Coal Tit's needle sharp song knives through this, showing the value of acoustic contrast.

The two abortive attempts are followed by a strange bird. The first two runs of song are over-recorded and ruined. We have, however, six good clear runs of song. All the recordings are on one track so we can edit out the bad sections of the tape and avoid losing quality by copying. Later, on the leader tape which precedes the strange bird we are able to write "Tree Pipit" . . .

To get three good recordings in one expedition would correspond to the angler's 'good day'. Like fishing, bird recording is seasonal and has its off days and lucky days. Beginners' luck sometimes plays a hand. It should not be thought that playing back through external speakers is essential. Sometimes the internal speaker of a mains recorder gives good results. Loss of high notes with tape running at $7\frac{1}{2}$ i/s is most likely due to a poor speaker. Using a good wide-range speaker with plenty of middle and top is infinitely better than treble boost. You will not capture natural beauty with unnatural volume. A powerful amplifier is for low distortion not high volume where bird song is concerned. Always record on one track only, edit the tape ruthlessly and have leader tape between items, with the item number and subject inscribed thereon. Keep an ordered index of the subjects showing 'What, Where and When' together with any remarks.


Perhaps you wish to record doves and cooing pigeons. Maybe you wish also to record a 'dawn chorus'. A parabola is unlikely to be useful here, as in the first instance it will give little gain to these very low pitched sounds, and would not capture a large enough spread of sound.

(continued on page 132)

The Grundig method



CONTINENTAL
TAPE
PRODUCTION
IN NORTHERN
IRELAND

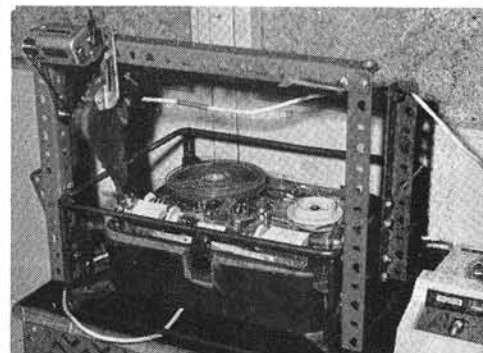

TWENTY years have passed since the allied armies met in the centre of Germany at the end of the second world war, and although the technique of recording magnetically on oxide-coated plastic tape has since spread in all directions, these two decades have not dislodged the inventors from a position of considerable importance in the tape recording industry. Superb professional machines are made in Switzerland, Japan, Scandinavia, U.S.A. and Britain; the Dutch and others can mass-produce high quality domestic models for a wide market; plenty of manufacturers at all points of the compass make recorders ranging from good to cheap-and-nasty; but the West Germans still seem to have that little extra something when it comes to combining streamlined modern factory techniques with a popular precision product.

In the rest of Europe the most famous name from this source in the field of domestic tape recording is probably *Grundig*, and in Britain machines carrying this label certainly account for a sizeable fraction of the market. Actually, the bulk of Grundig tape recorders sold in the UK are made in the UK, at Dunmurry in N. Ireland. While the more elaborate models (TK 40, 41, 46 and the TR 6 battery portable) are imported from Germany, all the popular machines are made just across the Irish Sea, a few miles from Belfast. We were recently invited to Dunmurry (a day trip, twelve hours London-to-London!) to see how an offshoot of central European enterprise fares in this gently undulating corner of the British Isles.

Opened in the winter of 1960/61, the Grundig factory occupies a floor space of 110,000 sq. ft. and provides work for a thousand people (very important in N. Ireland, where the Government welcomes and encourages any investment which creates employment). Already the largest tape recorder factory in the UK, a further extension is planned for opening this year, giving another 50,000 sq. ft. The factory is very light, clean and pleasant, with a grassy inner courtyard and all mod-cons for the employees—including spacious cloakrooms and a magnificent dining room which is also used for social events (including a fashion show!).

Although this establishment functions to reduce the numbers of Grundig machines coming to Britain from the Continent, one very important item is exported from Germany lock-stock-and-barrel. This is the actual production system. Grundig do not employ 350 design and research engineers for nothing; every detail of a tape recorder's growth, each stage of production, the types of machinery and test gear—all are the subject of thorough investigation before a complete production scheme is evolved. Having devised such

Left: Ten transformer bobbins wound in one operation. Centre: Listening for noise in sound-proofed booth. Lower right: Start and stop controls are depressed up to 20,000 times on this test rig.

a scheme, it is available for use elsewhere, and the system which we saw in operation at Dunmurry was in all essentials conceived in Germany. Despite the changed locale and personnel, it certainly seems to work with high efficiency.

Grundig are just launching four new models, comprising the *Luxus* range, details of which are given on page 127. We visited the factory during the early stages of a production run on these new machines, but already everything was buzzing away happily—no doubt because of the pre-conceived production plan. Indeed, things were so well thought-out that an array of labelled warning lights on the factory manager's desk gave immediate indication of a hold-up at any point in the system. With approximately 500 machines passing through the system every day, any delay is very expensive.


The Grundig machines are made on a rationalised sub-assembly system, the chassis and its wide rim forming the basic frame on which everything else is mounted; in one sense the chassis/frame is the tape recorder, housing both mechanics and electronics in a fashion poles apart from the deck-plus-chassis-plus-box approach. This production system may be likened to a river with many tributaries: each little stream (sub-assembly) feeds in its essential part, all the contributions being integrated with the main flow (chassis) at appropriate points. Finally, when each part has joined the river, the water (complete recorder) must flow through a large net (test and alignment) before moving out to sea (loading bay). We were able to follow many of the sub-assemblies through most of the way, but as it would require a whole month's issue of *Tape Recorder* to give every detail, we shall just pick out a few highlights.

Very rare of its kind was a massive electro-plating bath, with a moving belt carrying chassis around and lifting them up and down automatically from one solution to another according to an accurately timed schedule. One interesting feature here was a special hot-oil dip which removes microphonic peaks and dips from tin-plated surfaces, thus reducing the risk of corrosion.

Many components which other manufacturers would think twice about producing for themselves are made as a matter of course at Dunmurry. This includes mains transformers, wound ten at a time with insulating paper fed in between layers at lightning speed. The complete set of ten windings on its single long 'bobbin' is sliced up by a

Do it yourself gardening annual 1965

OUT NOW 2/6

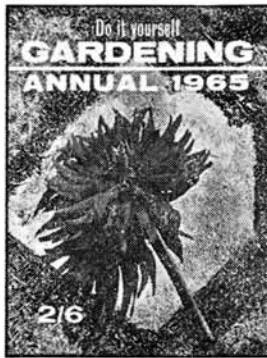

- Main features include
- Growing peaches and grapes
 - Wine making at home
 - Garden pond for £4
 - Sensational new flowers to grow this year
 - All about geraniums
 - Using black plastic to keep down weeds

From newsagents and bookstalls or 3/4 (pp) from Link House, Dingwall Avenue, Croydon, Surrey.

Exceptionally wide frequency response — virtually level from 40 c/s to 15 Kc/s — combined with excellent transient response, makes this the ideal instrument for the studio and wherever a high standard of fidelity is essential. Two models are available, each in three impedance sensitivities.

Model G.R. 1, having a semi-cardioid response, gives approximately 10 db suppression to high frequencies at the rear face. It is ideal for overcoming problems of feed-back between microphone and speakers.

Model G.R. 2, having a bi-directional "figure of eight" sensitivity pattern, discriminates against unwanted side noise both in the vertical and horizontal planes.

Supplied in attractive, padded instrument case, complete with 18ft. screened lead, swivel holder and connector

A full range of accessories are available. Please send for illustrated leaflet. Enquire too for details of the famous Grampian DP4 range of Moving Coil Microphones.



the Grampian Ribbon Microphone

Grampian

GRAMPIAN REPRODUCERS LTD
Hanworth Trading Estate, Feltham, Middlesex.
Feltham 2657

THE RECORDER CO. for best machines on advantageous terms

	Deposit £ s. d.	12 Monthly Payments £ s. d.	Cash Price Gns.
4-TRACK STEREO/MONAUROAL			
B. & O. Stereomaster	12 0 0	8 16 0	112
Ferroglyph 424	11 12 0	8 13 2	110
Sony TC 500	11 9 0	8 11 8	109
Grundig TK46	10 12 0	7 15 7	99
Philips EL3534	9 16 0	7 4 8	92
Sony TC 200	8 6 0	6 4 5	79
2-TRACK STEREO/MONAUROAL			
Revox Model 736	13 4 0	10 11 8	124
Brenell STB 1	12 0 0	9 0 0	120
Ferroglyph 422	11 12 0	8 13 2	110
B. & O. Stereomaster	12 0 0	8 16 0	112
Telefunken 98	10 0 0	7 9 7	95
MAINS 2-TRACK			
Brenell 5 Type "M"	9 5 0	6 18 7	88
Ferroglyph 5 A/N	8 19 0	6 13 10	85
Telefunken 85	8 15 0	6 10 8	83
Brenell 5/2 (Meter)	7 15 6	5 16 7	74
Brenell 5/2	7 5 0	5 8 8	69
Truvox 92	7 5 0	5 8 8	69
Reps R10 Mk. 2	6 4 0	4 12 11	59
Telefunken M55	4 10 6	3 7 9	43
Grundig TK18	4 2 0	3 1 5	39
Grundig TK14	3 13 6	2 15 2	35
Wyndor 707-11	3 9 0	2 5 0	29
Philips EL3552 Auto	2 14 0	1 17 6	24
Elizabethan Auto 2	2 16 6	2 0 10	26
Ferguson 3206	2 16 6	2 0 10	26

Open Saturday 6 p.m. - Friday 6.30 p.m.
H.P. also over 18 and 24 months

If unable to call, write for free brochure, or send deposit now for quick delivery.

FREE DELIVERY
PART EXCHANGE

	Deposit £ s. d.	12 Monthly Payments £ s. d.	Cash Price Gns.
MAINS 4-TRACK			
Grundig TK40	8 19 0	6 3 4	79
Reps R10 Mk. 2	7 5 0	5 8 8	69
Truvox R94	7 5 0	5 8 8	69
Philips EL3549	6 12 0	4 17 6	62
Grundig TK23	4 15 0	3 10 10	45
Elizabethan LZ29	4 2 0	3 1 5	39
Philips EL3548	4 2 0	3 1 5	39
Ferguson 3204	3 10 0	2 11 11	33
Elizabethan Auto 4	2 19 0	2 4 1	28
Fidelity Playmaster	2 12 6	1 15 11	23

SPECIAL OFFER!
"STANDARD" UNICORDER
Battery or Mains 2-speed Portable


No external mains unit required, completely self-contained. 2 built-in L/speakers. Remote Control. Capstan Drive. Battery/Modulation meter. Up to 2 hours playing time using 3" Triple play tape. Brand new. Latest model. Guaranteed. Supplied complete with Leather carrying case, shoulder strap, microphone, tape, 2 recording leads and earphone.

List price 36 gns. **Reduced to 24 gns.**
Limited supplies.

	Deposit £ s. d.	12 Monthly Payments £ s. d.	Cash Price Gns.
BATTERY			
Uher 40005	10 17 0	8 2 2	103
Ficord 202	7 0 0	5 3 10	66
Grundig TK6	6 17 0	5 2 4	65
Butoba MTS	6 4 0	4 12 11	59
Telefunken 300	6 4 0	4 12 11	59
National Voice Operated	4 17 0	3 12 5	46
Philips EL3586	2 16 6	2 0 10	26

H.P. INTEREST FREE

New **TANDBERG Model 823**
2-TRACK (Teak)



54 GNS.


Deposit £6.4.0
12 pts £4.5.10

Model 843. 4-Track (Teak)
59 gns.
Deposit £6.4.0, 12 pts £4.12.11

For the first time TANDBERG quality is now available at a remarkably low price—incomparable Tandberg styling, simplicity of operation, and outstanding performance are its hall marks. Specification includes: 7" reels. 33 and 1 1/2 i.p.s. speeds. Three-way speaker selector. 4 digit counter. 3 watt straight through mic. or gram. amplifier. Bass boost switch, pause lever. The teak model are ideal for incorporation in furniture. Four track models have DUO position for playing two tracks at the same time (e.g. will play stereo tapes monaurally). Free-head outlet for stereo playback with Hi-Fi amplifier, or slide synchroniser.

We will be pleased to demonstrate these fine models or send full details.

(DEPT. R) 188 WEST END LANE,
WEST HAMPS TEAD, LONDON, N.W.6
Telephone: SW1 4977

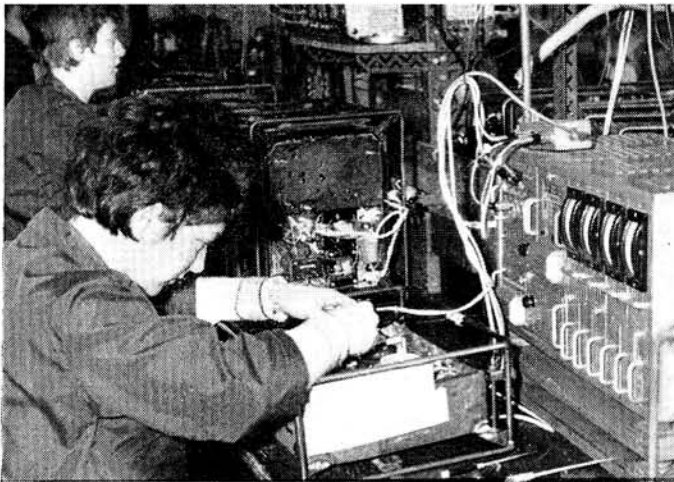

Above: Two views of the electrical alignment bench.

multi-bladed saw, lead-out wires are terminated, iron cores fitted—all in a routine matter-of-fact way which makes a complex operation seem almost as simple as plugging in a valve.

Perhaps the most impressive things we saw were the huge injection-moulding machines used to produce the plastic deck-top, case parts, spools and other bits and pieces. It is rather awe-inspiring to see one of these monsters at its silent work, creating as one piece in a matter of seconds a beautifully finished rigid case with every detail, all from a sticky, shapeless lump of plastic. The largest machine was working continuously, twenty-four hours a day, seven days a week, paying for a capital expenditure of about £25,000. These injection moulders do not demand much attention when working smoothly: a blind man was operating one, and during the fifty seconds in every minute not needed by another, its operator was adding a decorative finish to mouldings. Incidentally, another finishing touch added by an intriguing method was the application of aluminium lettering by pressing a plastic-backed metal tape on to a surface by means of a heated mould carrying the necessary lettering. The aluminium adheres in the shape of letters and the rest is brushed away.

A multitude of sub-assemblies, both mechanical and electrical, find their way eventually to the final assembly line. Here, because everything fits together accurately and is fed through in a logical order, a mere thirty operatives are able to assemble about 250 samples of a particular model per day. To walk around this line and watch a tape recorder grow from a lump of metal into a complex machine is quite fascinating, for the rate of growth seems phenomenal due to the very complete sub-assembly scheme.

After assembly the recorders are tested and aligned, a unified test gear being set-up to perform all the basic electronic measurements in quick succession. Frequency response, magic-eye setting, noise-level and output power are all covered by the one instrument. Occasional models are taken from the production run for checking in the factory laboratory, where heat-life-tests and other trials are conducted. One item in this section is a device for operating the STOP and START buttons up to 20,000 times, with the spools starting up and turning back endlessly.

Finally, a series of little booths house girls who subject every recorder to an operational test. All the controls are used, and as these young ladies know their models almost by instinct any departure from the 'norm' is soon discovered. The tests include listening for above average motor noise, judging musical quality, and generally putting the machines through their paces. Because they tend to become ultra-sensitive to particular deficiencies, these girls have nickname—we met 'Miss Noise' and 'Miss Clutch' amongst others!

So there, briefly, is Grundig at Dunmurry. The new recorders which we saw are now pouring across the Irish Sea and if they perform as well as they are produced they should be very successful.

our readers write . . .

. . . about stirring the customers

From: Martin York, 64 Porthkerry Road, Barry, Glamorganshire.

DEAR SIR, My article, *Some Thoughts on Guarantees* (December 1964) seems to have had the desired effect of stirring up the customers and I am glad to see that the consensus of opinion is sufficiently adult to take account of the Dealer's position.

Mr. Hellyer's suggestion (February) definitely qualifies him as a founder member of the Martin York Fan Club. I love the idea of charging the customer and letting him claim from the manufacturer. It will be interesting to observe whether any bright young P.R.O. dares to defend his employers in your columns, against this proposal.

As for Mr. McLaren's doubts (February), I agree wholeheartedly that this "paragon of a dealer" is a very rare bird. I cannot waste valuable space in defence of my veracity, so I ask you, Mr. McLaren, to accept my word that the circumstances which made the incident possible were regrettably exceptional. If only they were the rule!

As a tailpiece to the original article, I had hoped to reveal the name of the machine which finally gave satisfaction to 'Adam Bryant'; the makers would surely have found some way to express their gratitude for the advertisement. But it was not to be.

Scarcely had the ink dried on the December issue than Adam was again weeping on my shoulder. This time, it was the fault of the recording head—an expensive Continental component, for which the manufacturers of the machine could hardly be blamed.

Adam's nerve failed him. He could not face the dealer yet again and was on the brink of selling up and taking to chess. I have, however, persuaded him to take up the matter with the manufacturers,

I hope they are following this correspondence, for though we may appear to treat the subject lightly, there is a growing amount of very real dissatisfaction which will, in the long run, affect their business and which can only be made right by their action.

Yours faithfully,

. . . about guarantees and the specialist

From: Colin Braddock, Tape Recorder Centre (Blackpool) Ltd., 266 Waterloo Road, Blackpool, Lancs.

DEAR SIR, We are all guilty of hypocrisy at some time in our lives and I should like to join the fray in the field of Guarantees in the hope of retouching the picture of disreputability and inefficiency presented by recent articles and letters in this journal.

I speak not just as a dealer in the highly specialised field of tape recording, but as an enthusiast, importer and distributor of tape equipment. In common with several other small dealers, I am my own service agent and salesman and, in fact, I live the business. Though I could easily do so, I refrain from selling 'cheap and nasty' products, keeping to reliable brands of my own choice.

Regarding Martin York and his imaginary customer—we have all heard of such cases. Perhaps if the 'imaginary dealer' had been able to tell us, the story would have sounded slightly different.

(continued overleaf)

REPS R10 MkII VERSION

**AN IMPROVED MODEL IS NOW
AVAILABLE MAINTAINING A HIGH
STANDARD OF PERFORMANCE**

Exclusive professional type idler wheel for reliability and reduced wow.

D.C heating on pre-amp valves.

Modified Magnavox Studio deck with improved wow/flutter.

Bogen micro-gap two or four track heads fitted.

10 watts nominal R.M.S. Rating.

Calibrated Bass and Treble controls

Mic. Gram/radio inputs, separate controls for mixing.

$7\frac{1}{2}$ i.p.s. 40—15,000 C.P.S. \pm 1dB 100 μ S }
 $3\frac{3}{4}$ i.p.s. 40—10,000 C.P.S. \pm 2dB 200 μ S } to C.C.I.R.
 $1\frac{7}{8}$ i.p.s. 50— 5,000 C.P.S. \pm 3dB 400 μ S }

5 ECC83. 2 EL84. 1 ECC82. 2 Contact Rectifiers.

Pre-amp Signal/Noise > —55dB at all speeds.



Fully illustrated literature
available on request to—

2 Track 59 gns.
4 Track 69 gns.

REPS (TAPE RECORDERS) LTD.

44 Packington Road, Acton,

London, W.3

Phone: Acorn 4141

READERS' LETTERS CONTINUED

We all know that unscrupulous retailers exist; we also know that today the public at large have more money and consequently a poorer sense of values than they did. Yet a customer demanding lower prices, greater discounts and the same service would scream blue murder if he was forced to work harder for the same wages. The abolition of RPM suggests that retailers should work harder for less profit. Hypocrisy! When, as sometimes happens, I find myself in front of, rather than behind, the counter, intending to purchase an expensive item, I do not instinctively look for the fellow with the lowest price—I want service after sales.

Another point the customer tends to forget is that the steady fall in price of electronic equipment means a similar reduction in profit for the retailer, who has to sell more and increase his efficiency in order to keep the same profit margin from year to year.

As to the point regarding manufacturers and payment for work done under guarantee, again this is a two-edged blade. Some manufacturers will provide free service for genuine faults but there are customers and even (so-called) dealers who return equipment to the manufacturer for reasons which an idiot could undertake to repair.

Transport is itself one of the major causes of mechanical faults. To quote one case to you, and here I am soul seeking to find the exact truth, we sold a machine to a dealer in May last year carrying a six months guarantee. This machine was returned to us, without notice, in December with a request for free repair under the guarantee. On inspection it was found to be a very minor fault which could and should have been serviced by the dealer, who was entitled to charge for time. Apart from this, packing instructions had not been followed—resulting in internal damage to the machine. A nominal charge was made for this repair with a letter why it was made and how the machine should be packed. A shirty letter was promptly returned by a 'white collar' director more or less telling us that we had supplied it in the first case and were therefore married to it for life; this very same fiasco was repeated shortly after. The retailer receives a trade discount for stocking, selling and caring for the machine, especially when out of guarantee. He should follow this; far too few do.

It may sound stupid, but we have had portable machines returned with the complaint 'Won't work' and found the reason to be—no batteries!

Yours faithfully

. . . about more accurate pictures

From: E. R. Chilton, General Sales Manager, Reditune Ltd., Grosvenor House, 125 High Street, Croydon, Surrey.

DEAR SIR, There are certain aspects of the article about our company's activities (*Endless Music*, February) which I should like to clarify, in order to give a more accurate picture of our operation.

Firstly, your reference to Copyright charges being paid by us on behalf of subscribers using our music is misleading, since it is in fact the Performing Right Society's fees which we pay for them—in order to spare subscribers from the complications of this most complex fee system.

Secondly, I would hate to leave your readers with the impression that we record unpopular music. Your reference to our practice of taking a further copy of the master "which is subsequently filed in the hope that its contents return to popularity at a later date", refers, I take it, to the protection copy which we make and store to guard our very valuable masters against accidental loss or damage.

Elsewhere in the article you describe our splice-finder as a "bad-splice finder". The essential function of this machine is to find all splices, in order that: (a) If it is necessary to cut the tape this can be done at the splice and (b) If we need to check the tension this can best be done at the point of splice where the tensioning was originally carried out.


Other points of detail which I should like to correct are: (1) Subscribers are supplied with a float of five programme cassettes (not four) any two of which can be exchanged as often as required. (2) Our "Slave" deck was designed and built in Croydon, not Jersey; only our tape players are made in Jersey, by an associated company.

Yours faithfully

Editor's Note: We are glad to publish these small corrections, but must point out that we were originally told that subscribers are supplied with three cassettes, later modified to four, and now to five!

tape reviews

CLASSICS **GEORGE GOODALL**
JAZZ & FOLK **TONY FARSKY**
SPOKEN WORD **MAURICE POBBREY**




SONNY TERRY & BROWNIE MCGHEE. Twelve items including Treated Wrong, Southern Train, Gone But Not Forgotten. **World Record Club TT379**, 3½ i/s twin-track mono. 29s.

IT is difficult to believe that less than ten years ago recordings of such blues artists as Sonny Terry and Brownie McGhee were just not available in this country. Today, the catalogues contain a wealth of rich material by Blues singers. Whole companies of these artists arrive regularly from the States, to tour Britain. All of which has had a revolutionary effect on the sounds being produced by our own groups.

With this greatly changed position since the first records were issued here in 1958, followed by many visits, it is not surprising that some people do not rate Brownie and Sonny as highly now as they once did. It is possible that popularity and world touring may have led this vocal-harmonica-guitar-duo to become rather more polished, but the music is nonetheless still a very fine example of the idiom.

The combination, on this recording, of voice, guitar and harmonica, with the driving rhythm provided by Brownie's guitar, is a unique sound which embodies the very essence of the blues.

There are twelve numbers on this tape, many of them original compositions. The recording was made in Britain during one of their many visits. Several items have our own Dave Lee added, who plays some fine, earthy, primitive piano blues which fit in remarkably well with this great combination. T.F.



HAYDN/BRAHMS Symphony No. 100, Symphony No. 1. Bamberg Symphony Orchestra conducted by Jonel Perlea. **Recotape RML 507**, 3½ i/s twin-track mono. 50s.

AT first sight the choice of programme on this record may seem casual. In fact I am sure that it is not, for Haydn represents the beginnings of classical symphonic composition whilst Brahms's symphonies represent perhaps the fullest development of the form. Brahms is sometimes described as a classicist living in a romantic era, and the purely classical elements of his writing seem to be made more apparent when heard after the Haydn symphony. The harmonies may be richer (for want of a better word) but the roots of the symphonic form are obvious. In fact, on the occasions that I have played this tape right through, I am sure I have enjoyed the Brahms symphony more for having just heard the Haydn.

The Bamberg Symphony Orchestra is either out in full force, or else the recorded acoustic makes the orchestra sound bigger than it really is. This suits the Brahms symphony well, I feel, but makes the performance of the Haydn sound rather heavy-handed. In the minuet, in particular, there seemed to me to be a lack of stateliness and delicacy. Small points these, though, for it is an enjoyable performance.

On wide-range equipment the review copy sounded rather bass-heavy with somewhat hard sounding string tone. Using the tape recorder's small internal speaker, however, these defects were less apparent. Some may prefer the resultant added richness. G.G.

SHAKESPEARE. (Scenes and Speeches.) Vol. 2. Hamlet, Julius Caesar, A Midsummer Night's Dream, Twelfth Night, As You Like It, Much Ado About Nothing. Narrator: Michael Howley; director: Denis Comper. Dramatised by a team of sixteen actors. **HMV TA-CLP 1739** (Laureate Series). 3½ i/s mono. twin track. 35s.

AFTER the lively and spirited reading on the first volume I admit to a little disappointment here. The selections seem presented as items alone, as set pieces, and curiously removed from the passion and context of the play. Even the dialogues do not really engage and score off each other.


Robert Hardy gives us the soliloquy from *Hamlet* "To be or not to be, that is the question" and the "advice to the players" speech. They are intelligently and clearly spoken but from the first I missed the agate edge of Hamlet's searching, questioning mind working its way towards and away from suicide, and from the second sheer pleasure and relish with which the prince talks to the players—his special guests and friends. *Julius Caesar* fares less well. George Baker is helped little by the three voices trying to simulate a crowd effect but as Mark Antony, his funeral oration speeches before the Roman Forum do not add up to the fantastic piece of mob incitement and opportunism that cleft the Roman state in twain. And the conspirators Brutus and Cassius arguing in the camp near Sardis are just not the political heavyweights we have watched drag down "the greatest Roman of them all".

The comedy selections are happier. Lewis Jones giving us Jaques' "All the world's a stage" from *As you Like it*, and *Much Ado About Nothing* is nicely served with two scenes of confusion soon to be righted. This play has great vivacity and characterisation and the actors catch it well. The Titania/Oberon encounter in *A Midsummer Night's Dream* is most charmingly spoken by Anna Massey and Redvers Kyle in the style of high comedy. The *Twelfth Night* scene in Olivia's garden where the unfortunate Malvolio is gulled into the wearing of yellow and cross-garters is not altogether successful in bringing the humour to life, but Roger Liversley's Sir Toby Belch complete with throaty scurrilousness is great fun. M.P.

WHEN listening to the powerful and relentless intensity of *Mars* from Holst's *Planets*, it is difficult to imagine the composer as a man who began his more academic musical career as the music master of a girls' school. *Mars* was, in fact, the first of the movements to be written and was composed in the year 1914, at the beginning of the Great War. The work was completed in 1917, and the events of the period doubtless influence much of the music's atmosphere, though of course it is the *Mars* movement that is the really warlike one.

At one time it was difficult for Holst to get a conductor to perform this work (I believe Sir Adrian Boult gave it its first performance),

THE PLANETS (Holst), BBC Symphony Orchestra conducted by Sir Malcolm Sargent. **HMV TA-ALP 1600**, 3½ i/s twin-track mono. 40s.



but these days it is considered quite a normal part of concert repertoire. On this tape record Sir Malcolm Sargent shows no hesitancy in piloting us through our space journey, and the BBC Symphony orchestra sounds very well. The contrasting moods reflected in the astrological symbolism come over clearly. The quality of the recording, though restricted in frequency range, is satisfactory except for a small patch of drop-out appearing at the beginning of Track One on the review copy. G.G.

THREE previous articles of this series have dealt with *Philips* and their associated companies' tape recorders. These appeared in May and June 1962 and in May 1963. Necessarily, the treatment had to be perfunctory. This company is nothing if not prolific.

My postbag since then has proved that there were a number of small points requiring further explanation. This is aggravated by the difficulty the layman has of getting service information on certain machines. Mainly, the queries have been about small adjustments, the 'correct' setting of the transport system, clutches, brakes and switches. But also there is a little confusion about the model differences, and the accessories that are available.

The confusion begins with the *EL3541*, now five years old, and overtaken by the 'upright' revolution, and the 'square-button' models of more recent times—about which, more later. This machine was similar to the *Stella 454* and the *Cossor CR1602*, except for small styling differences. But hard on its heels came the *3541/15B*, which, though mechanically similar, is quite a different machine.

Main differences were the layout of the electrical section and the switches. These last were not only mounted differently, but used a slightly changed contact sequence, with a printed circuit slider, and




NUMBER FORTY · RECAP ON PHILIPS BY H. W. HELLYER

those readers who wished to modify the 3541 to later, improved versions, may be disappointed.

The changes bring in rather more complicated feedback circuits between second and third stages, and allow for the physical changes of the printed circuit boards. Certainly, they give more elbow-room, and the 15B is a much easier machine to service. The sub-panel on which the two variable capacitors are mounted is now easily reached for a quick check if oscillations cease. Often, a slight movement of one or other of these, depending on the track being used, is sufficient to clear what may seem to be a deep and difficult fault. The physical construction of the Philips concentric trimmers is such that a very delicate electrical change can be effected by a small movement of the upper section on the threaded spindle. But with these capacitors, when the two sections have to interleave concentrically, and where the thread on the spindle is fairly coarse for its diameter, any wear—generally, to be honest, due to rough treatment!—results in intermittent short-circuits, and a consequent intermittent bias.

MODIFIED TONE CONTROL

The tone control is now in the grid circuit of the triode section of the *ECL82*, the third stage, and not, as previously, the feedback over the output stage. The oscillator coil is different, which precludes adapting the 3541 to 15B circuitry, as part of the difference includes the superimposing switch circuitry. But the problem that is more realistic, and can be overcome, is to alter the 15B superimpose circuit

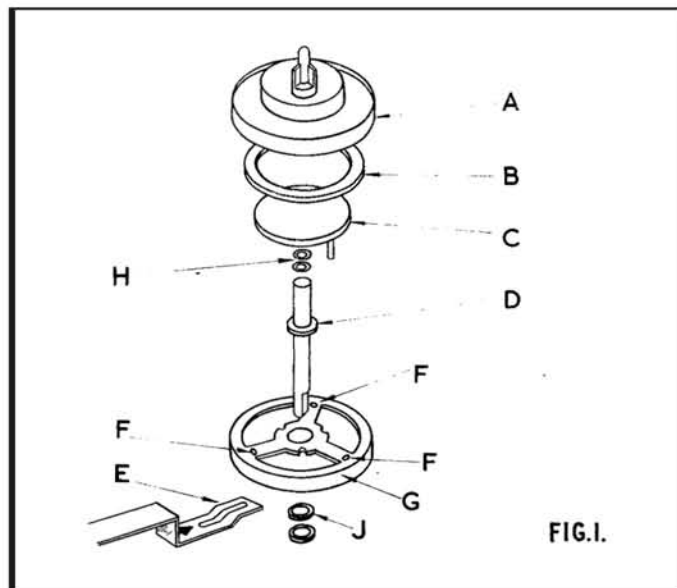

to the later, 15K, parallel track circuit, and to adapt the stereo socket for feeding an external amplifier, such as the Philips 3774. More about this later.

Before getting involved in the electronics, let us look at some of the mechanical features, common to the various machines, which give the most worry.

Clutches: the system was described in the previous articles, but will bear repeating, and would be better illustrated by the exploded drawing of fig. 1, which the restriction on space squeezed out of the former servicing pages. The spool carrier A has an inset felt ring B which rests on the plastic disc C to allow a slipping torque for take-up. The disc C, during RECORD or PLAY, is held up by the collar on the spindle D, so that it is clear of the clutch drum but still held in place by the spigot.

The height of the plastic disc is determined by the raising of the spindle, whose flattened lower end sits in a slot of the angle arm E.

This arm has a 'set' in its end of about two millimetres. It is not—repeat not—a solution to clutch troubles to bend this arm for more upward movement. The usual trouble is that the turntable sits too low and tends to rub on the Vulcan pads F which are inset in the clutch drum G. This action is invoked during fast forward wind, when the movement of the arm E in the direction of the arrow allows the spindle to sit lower and makes the turntable and the clutch drum into a composite piece of winding mechanism.

IMPORTANT PARTS

The important parts are the washers H and J. The upper pair H are to adjust the height of the turntable, relative to the spindle, while the lower washers adjust the height of the clutch drums. Method of adjustment is first to check that the turntables are correctly positioned so that the tape runs straight and true between the spool flanges, and is square to the guides, by adding or subtracting the plastic washers beneath the disc. These small washers are supplied as spares by Philips dealers, and require a small amount of lubrication. After regular use they tend to dry out, crack and disintegrate. It is possible, as a temporary cure, to make replacements from thin polythene, if you have a steady hand and a wife with a suitable pair of manicure scissors.

The above depends on one thing—that the guides themselves have not been altered. They are too temptingly easy to maladjust. Correct positioning is when the space from the lower side of the left

mounting bracket to the deck-plate (the sub-plate, to be more accurate), is 16.3 millimetres. And the distance from the lower side of the forked piece of the right guide bracket should be 16.5mm. Note that these guides are mounted on screws which insert from beneath the plate, and are locknotted and spring mounted so that adjustment needs only slight movement of the upper nut.

Returning to the clutch drum; this important item should be at such a height that the tops of the Vulcanian plugs are between 0.8 and 1.2mm. from the underside of the turntables. Slowing down as a full spool is approached when fast winding usually indicates that this clearance is too great, either due to wear of the plugs, or incorrect positioning of the spool on its bearing, which again needs packing with washers and slight lubrication at this point. Too much enthusiasm here, or a hardened felt ring in the underside of the turntable, will cause snatch during take-up. The felt should be degreased regularly, as should the feed spool felt, with methylated spirit or carbon tetrachloride.



Brake adjustment has been dealt with before, and should need no repeating. On these machines, the setting of the peripheral brake pads is self-evident. Allowance for wear can be made by feeding the cork or composition parts further through the bent clips.

Head adjustment has also been covered before, but as there have been so many queries that obviously stem from a belief that heads cannot be adjusted for optimum results without a battery of meters and a Physics Laboratory sub-standard generator, it is worth a brief precis of the information that was given on page 164 of the May 1962 issue.

TWO-FOLD DIFFICULTIES

The difficulties are twofold; achieving correct alignment for four-track response, and preventing erase heads from either obliterating a wanted track or failing to clean off an unwanted one. The two things go hand in hand, but a sequence of operations must be followed to get any sort of acceptable results without the aid of test gear.

First need is for a reliable source of playback signal. If no test tape is available, a good pre-recorded tape, such as one of the better Record Club offerings, is as good a source as will be required. One thing is

certain—the tracks will be in the right place! To adjust a record playback head it is thus only necessary to play back this tape and align the head for maximum output.

The snag arises from the reluctance of the human ear to indicate small changes in output level, as compared with the accuracy that can be obtained with even a moderately specified meter. There are two schools of thought about this method of aural adjustment. My own favour is for headphone listening and null point adjustment. This relies on the fact that it is easier to detect the absence of sound than distinguish between small changes in sound level. So we play back the pre-recorded tape, turn the gain control to a minimum, until the signal can just be heard. Then, the azimuth adjustment is made, very slowly and carefully, adjusting the gain control to keep the sound right down to the merest whisper. Eventually, a position will be found where the sound can only just be heard, but any alteration of the azimuth screws will silence the whisper.

Given that the guides are correctly adjusted, as outlined before, and that enough time and trouble is taken with this setting, the azimuth alignment of the combined Record/Play head can be made with some precision. For $\frac{1}{2}$ -track heads, which are a little more difficult to align in this way as azimuth discrepancies do not have such a great effect upon output, it is advisable to align on track 3 (numbering 1 to 4, top to bottom). When the best possible setting has been found, repeat the alignment on track 1, when it should only be necessary to check the exact height of the head. This applies particularly to heads using three and four screw fixing, but seldom to the two-screw mounted head.

A TRICK IN THIS

Having done all this, remove the test tape and check the recording and erasure. There is a trick in this: for normal machines, erasure takes place prior to recording, and a good deal of care is needed to distinguish between the signal that has been partially erased by incorrect erase head setting, and that which is not being recorded at an incorrect level. So we put the erase head out of action (using the super-imposition facility, if fitted), or remove the tape from the immediate vicinity of the erase head. A thin piece of plastic, such as the tongue of one type of ladies' comb, or the handle of one of the manicure implements in the kit you borrowed previously from her ladyship, does this very nicely.

Make sure your tape is magnetically 'clean'. Bulk erase, or use new tape. Record a signal on Track 1, wind back and re-record a similar signal on Track 3. If you have some sort of constant sound available—even the whine of a vacuum cleaner, with the gain setting at the same level each time, and the position of the microphone unaltered, has been known to provide a fair measure of sound balance. Play back the two tracks, now parallel on the tape. Note that the sound level on each is similar. If not, you probably have the head too high, and had better check the original alignment.

Once this is right, and you are satisfied with the two tracks of equal sound intensity, invert the tape, and between these two sounds, apply the erase field. Simply remove the erase blanking and record with no input, on Track 2. Turn the tape over again and replay those two recorded tracks, listening carefully for any diminishing of output on either. If Track 1 has been impaired, the erase head setting was too low; if Track 3 is weaker, the head was too high. Repeat this operation several times, using cleaned-off tape each time, or a further portion of new tape, until no difference between the two tracks can be discerned.

Still on the subject of heads and erasure, we come to the difference between the 15B and 15K. This consists of changes in switch connections to convert the superimposition facility of the 15B to a parallel play facility, and also to bring out to the stereo replay socket a 16V supply to power a preamplifier. Fig. 2 shows the circuit used in the later model. The only additional components needed will be two resistors, 6.8K and 47K respectively, for the feed to the stereo socket. The top of the 47K is taken to a convenient point on the HT line. The connection from pin 3 of the stereo socket will have to be taken from the connection on the track switch which goes back to the bottom tag of the erase head via the track switch. See fig. 3. This point is then taken to the junction of the two resistors. (continued overleaf)

PERFECTED AUDITORY LEARNING MACHINE THE COMPLETE PORTABLE SLEEPOMATIC UNIT

Comprising transistorised tape machine, microphone, auto time-switch, under-pillow speaker, batteries, FROM £26. 0. 0.

SLEEPOMATIC UNITS ARE PROFESSIONALLY ADAPTED FOR AUTOCONDITIONED STUDY, CALLED SLEEP-LEARNING

Details of equipment, tapes and discs gladly sent on receipt of postcard

EDUCATIONAL RECORDINGS LTD.,
(Dept. TR) 21 Bishops Close, Church Lane,
London, E.17

BRAND NEW 100% TESTED RECORDING TAPES

MANUFACTURED BY FAMOUS BRITISH FIRM

Fitted Leaders and Stop fails. All boxed and suitable for 2 or 4 track recorders at any speed.

Our guarantee is in writing with all orders (it has never ever been requested)

	Size	Length	P.V.C. Craytherm	P.V.C. Poltray
STANDARD PLAY ...	3"	250'	2/6	2/3
	5"	600'	9/-	8/-
	5½"	900'	11/6	10/-
LONG PLAY ...	3"	1200'	16/-	12/-
	4"	225'	3/-	2/9
	5"	450'	6/-	5/6
DOUBLE PLAY ...	5½"	900'	11/6	10/-
	7"	1200'	16/-	12/-
	7"	1800'	23/-	15/6
EMPTY SPOOLS ...	3" 9d	5" 2/-	5½" 2/3	7" 2/6

Post and Packing 1/- per spool, 4 or more post free.

The above tapes are only available at these prices from:

N. Walker, 28 Linkcroft Ave., Ashford, Middx. Tel: Ashford 53020

EXCITING—INEXPENSIVE—EASY TO LEARN LANGUAGES ON TAPE BY

LANGUATUTOR

Globetrotters, Business Men, Students and Holidaymakers learn Languages on Tape with Languatutor. Why? Because our experienced Tutors and Nationals teach you to speak the Language of your choice naturally, without effort, and with the correct pronunciation, in the shortest possible time. Languatutor really do make Languages Exciting—Inexpensive—and Easy to Learn.

**FRENCH · GERMAN · ITALIAN
RUSSIAN · SPANISH**

Costs per language—(Twin Track 3½ips) One 5" spool 90/- or One 4" spool 49/6. Free brochure on request.

LANGUATUTOR RECORDINGS LTD.

(Dept. TR2), Milton Street, Brixham, S. Devon

London stockists: The H.M.V. Shop, 363 Oxford Street, W.1

for the best
bargains read

THE
**EXCHANGE
& MART** ^{6d}

EVERY THURSDAY

Britain's bargain weekly

TAPE RECORDER SERVICE CONTINUED

The parallel effect switch is added between the track switch tag to which the 56K resistor is connected, and the tag on the PLAY switch which is second from the end of the board. Although the actual switch supplied by the makers is a lockable type, with spring loaded spindle, this only requires a single-pole, single-throw switch, and any convenient toggle switch could be used. The superimposing switch will have to be disconnected, making a permanent connection to the commoned erase head connection.

Other changes that came with later models were to fit a 5-pin DIN socket for Diode input and a 5-connection I.E.C. socket in place of the 2-pin radio socket, with a 100K resistor as matching grid load for the high-level input pre-amp stage (ECC83).

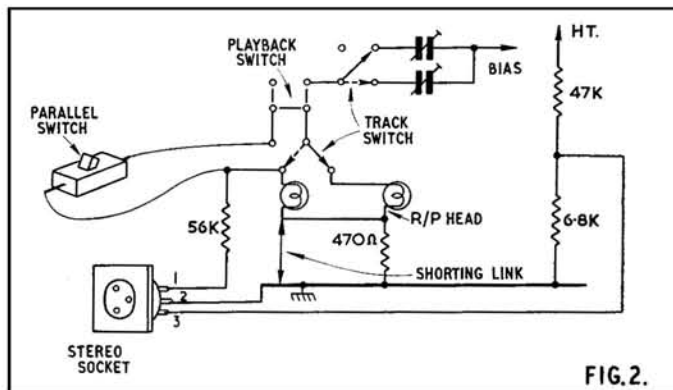


FIG. 2.

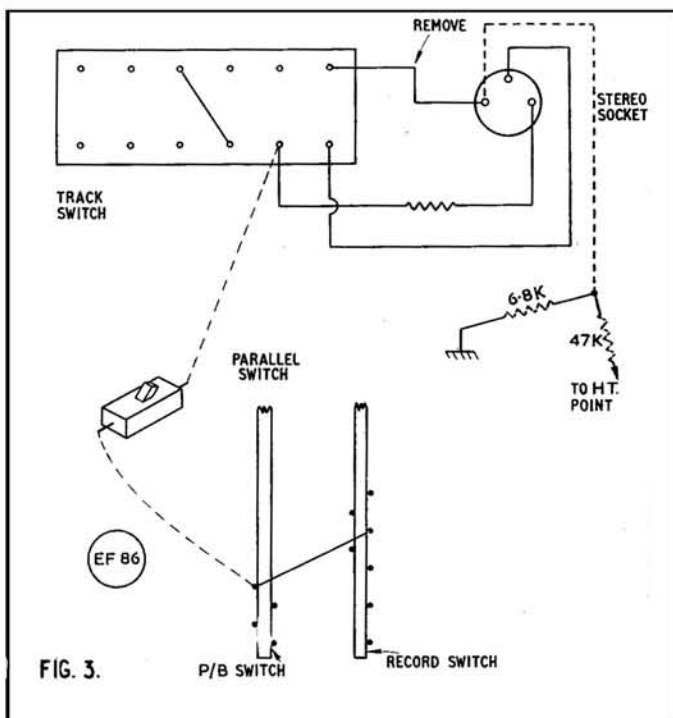


FIG. 3.

The type of preamplifier used with these models is the EL3774, a three-transistor job, using an OC44 and two OC75s. The frequency response from the 1 volt output socket (150k matching) used to power the main amplifier, is from 60 c/s to 10 Kc/s, while from the 2-pole socket with 200mV output across 1,000 ohms, the top response is 4.5 Kc/s.


But the question most frequently asked is not about the preamp itself, or the later type 3787, which matches the Philips EL3549, Cossor 1604 and 1605 and the Stella 458 and 459 and is a much more comprehensive job, but about the various interconnecting leads that can be used. In the next article, these will be drawn and described in full.

NEW PRODUCTS

NEW PRODUCTS

NEW PRODUCTS

**FOUR
NEW
GRUNDIG
RECORDERS**

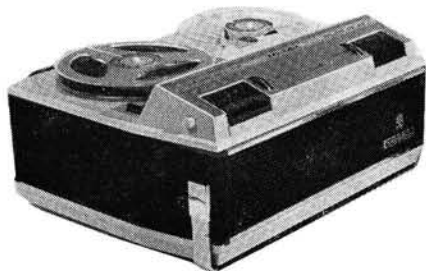


FOUR new recorders have been added to the *Grundig* range—Models *Luxus TK 14L, TK 17L, TK 18L* and *TK 23L*. Common specification points are tape speed - $3\frac{3}{4}$ i/s; frequency response - 40 c/s to 12 Kc/s ± 4 dB; wow and flutter - $\pm 0.2\%$; output power - 2.5W; dimensions - $13\frac{1}{2} \times 10\frac{1}{2} \times 6\frac{3}{4}$ in.; weight - 22lb. All four incorporate high impedance and external speaker outlets and all are mains powered.

The TK 14L and 18L are $\frac{1}{2}$ -track machines, having 48dB signal-to-noise ratio, input sockets for high impedance microphone and pickup, with tape counter, speaker switch, pause control and tape jointing channel. Prices are £38 17s. and £43 1s. for the TK 14L and its auto-gain equivalent, the TK 18L, respectively.

Quarter-track operation, with 45dB signal-to-noise ratio, is offered by the TK 17L and TK 23L. The latter model features manual and automatic gain control, while both have three input sockets and headphone monitoring facilities. The TK 17L costs £45 3s. and the TK 23L - £51 9s.

Manufacturer: Grundig (Great Britain), Newlands Park, Sydenham, London, S.E.26.


**HARVEY
BULK
ERASERS**

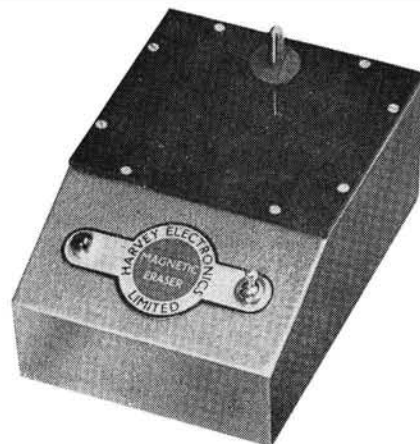

VARYING in price from £6 5s. to £15 10s., a new production of Harvey Erasers was recently announced. Twelve models are now obtainable, to handle spools of up to 12in. diameter and tape widths up to 1in. The units can also be used to demagnetise small metal objects such as watches and tape heads. In the latter case, care should be taken to protect loudspeakers magnets.

Manufacturer: Harvey Electronics Ltd., Farnborough Road, Farnborough, Hants.

**HEAD
CLEANING
STICKS**

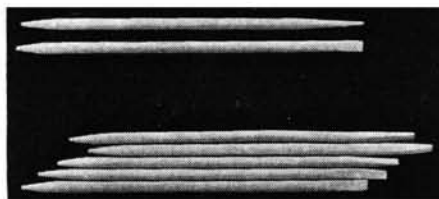

EASY access to tape heads and head channel is provided by the 4in. wooden sticks sold by DEYM. *Cleanheads* are available in packets of eight costing 1s. (or 1s. 4d. by post) and should be used with small pieces of cotton wool soaked in methylated spirits.

Manufacturer: DEYM Products, 73 Wadsworth Road, Sheffield.

**BAIRD
VARSITY
101
THREE
SPEED
TAPE
RECORDER**



DDOUBLE-track playback and inter-track recording are incorporated on the *Varsity 101* tape recorder recently announced by Baird. A BSR TD10 tape deck gives three speeds of $7\frac{1}{2}$, $3\frac{3}{4}$ and $1\frac{3}{4}$ i/s, 7in. spool capacity and $2\frac{1}{2}$ minutes rewind time per 850 ft. reel. Internal mixing of high impedance microphone and GRAM inputs and separate bass and treble controls are also featured. The $\frac{1}{2}$ -track recorder provides outputs for external amplifier and speaker with facilities for muting the internal 8×5 in. unit. Gain level is indicated by magic-eye and cabinet dimensions are $16 \times 16\frac{1}{2} \times 8$ in. The price, including crystal microphone and accessories, is £34 13s.

Manufacturer: Baird TV Distributors Ltd., Empire House, 414 High Road, Chiswick, London, W.4.

BEYER MICROPHONES

FOUR new microphones have been added to the *Beyer* range: Models *M55, M80, M110* and *M610*. The *M55* is housed in a die-cast zinc casing and has a frequency response from 70 c/s to 16 Kc/s ± 2 dB and omni-directional pickup pattern. Output impedance is 200 ohms or 80K and the microphone costs £6 17s. including stand and cable.

Price £12 18s., the *M 80* cardioid microphone has a frequency range from 50 c/s to 16 Kc/s and is also available with 200 and 80K impedances.

The *Beyer M 110*, is suitable for use as a lavalier microphone for reporting and in general applications requiring some degree of portability. Frequency range and output impedance are 60 c/s to 12 Kc/s and 200 ohms respectively; retail price is £28 11s.

Model *M 610*, pictured on the right, has a built-in music/speech (bass attenuation) and on/off switch and a cardioid pickup pattern. Nominal impedance is 200 ohms but an external matching transformer is available for 50K ohm impedance requirements. A 37.5 ohm balanced line version is also available for public address applications. Price is from £22 to £26 12s. depending on impedance.

Distributor: Fi-Cord International, 40a Dover Street, London, W.1.



TAPE RECORDER COVERS



Smart waterproof cover to give complete protection to your tape recorder. Made from rubberised canvas in navy, wine, tan, grey and bottle green with white contrasting pipings, reinforced base, handy zip microphone pocket and name panel.

Grundig TK.1	49/6
" TK.5	55/-
" TK.6	67/6
" TK.8	63/-
" TK.14 & 23 & 18	59/6
" TK.20	52/6
" TK.24	55/-
" TK.25	55/-
" TK.30	60/-
" TK.35	63/-
" TK.40 & 41	66/-
" TK.46	82/-
" TK.55	63/*
" TK.60	75/*
" TK.830/3D	63/-
" Cup	35/*
Telefunken 85	65/-
" 75/15 & 76K	55/-
" 95	69/6
Philips 8108	57/6
" 3548	No Price
" 3534	87/-
" 3459	79/6

Philips EL3538	63/-
" EL3542	63/-
" EL3536	70/-
" EL3515	57/6
" EL3541/115	57/6
" 3541/H	72/-
" Starmaker	66/-
Cossor 1602	57/6
" 1601	63/-
" 1604	79/-
" 1605	84/-
Stella ST455	63/-
" ST454	57/6
" ST458	79/-
" ST459	84/-
Saba	63/-
Elizabethan FT.1	66/-
" FT.3	75/-
" LZ.29	75/-
Fi-Cord 1A	52/6
Fidelity Argyle	55/*
Clarion (with strap)	52/6
Brenell Mk. 5	77/-
" 3 star	69/-
Truvox R92 and 94	99/-
Robuk RK.3	67/6
Ferrograph	88/-
Sony 521	90/-
Revox	84/-
Optacord 414 + 412	63/-

*Without pocket

A. BROWN & SONS LTD.
24-28 GEORGE STREET, HULL. TEL.: 25413, 25412

Hi-Fi News

Britain's best magazine for the hi-fi enthusiast

REGULAR FEATURES INCLUDE

- ★ Details of new products
- ★ Hi-fi equipment reviews
- ★ Readers' problems answered
- ★ Stereo record reviews



Hi-Fi News

**2'-
MONTHLY**

Published on the 28th of the month.
From newsagents and bookstalls or 2/4 (pp) from Link House, Dingwall Avenue, Croydon, Surrey.

FRANCIS OF STREATHAM

MAINS OPERATED TAPE RECORDERS

B & O Stereomaster	112 gns.
*Brenell Stereo STB I	£120
*Brenell Mk. V Model M	88 gns.
*Brenell Mk. V Series 2	69 gns.
Cossor 4 Tr. 1604 2 sp.	39 gns.
Cossor 4 Tr. 1605 4 sp.	62 gns.
Cossor 1606 4 Tr.	29 gns.
Cossor 1607 Stereo 4 Tr.	57 gns.
Elizabethan LZ24	34 gns.
Elizabethan Auto	26 gns.
Elizabethan LZ29	39 gns.
Elizabethan 511 4 Tr. St.	65 gns.
*Ferrograph 422 or 424	110 gns.
*Ferrograph Series 5	85 gns.
Fidelity Major	35 gns.
Fidelity Playmaster 2 Tr.	20 gns.
Fidelity Playmaster 4 Tr.	23 gns.
Fidelity 2 Tr.	21 gns.
Grundig TK14	35 gns.
Grundig TK18 "Magic Ear"	39 gns.
Grundig 23A Auto	49 gns.
Grundig TK40 4 Tr.	75 gns.
Grundig TK41 2 Tr.	75 gns.
*Grundig TK46 4 Tr. St.	99 gns.
Philips 4 Tr. 3549	62 gns.
Philips 4 Tr. Stereo 3534	92 gns.
Philips 3548 4 Tr. 2 sp.	39 gns.
Philips 2 Tr. Auto 3552	24 gns.
*Reflectograph "A" 1/2 Tr.	105 gns.
*Revox T36	£139.19.0
Robuk	36 gns.
*Saba Stereo	95 gns.
Sony 200	72 gns.
Sony 500	105 gns.
Stella 458 4 Tr.	39 gns.
Stella 459 4 Tr.	62 gns.
*Tandberg Series 6	110 gns.
*Tandberg Series 7	93 gns.

Tandberg Series 8 2 Tr.	54 gns.
Tandberg Series 8 4 Tr.	59 gns.
Telefunken 55	43 gns.
*Telefunken 85 de luxe	83 gns.
*Telefunken 96 4 Tr.	69 gns.
*Telefunken 97 1/2 Tr. Stereo	95 gns.
*Telefunken 98 1/2 Tr. Stereo	95 gns.
*Vortexion WVA	£93.13.0
*Vortexion WVB	£110.3.0
*Vortexion CBL Stereo	£160.0.0
Wyndor Sabre	23 gns.
Wyndor 707 2 Tr.	27 gns.
Wyndor 708 4 Tr.	32 gns.
Truvox R.92 2 Tr.	69 gns.
Truvox R.94 4 Tr.	69 gns.
*Truvox PD.93 or PD.95	59 gns.
*Truvox PD.97 or PD.99	79 gns.

BATTERY PORTABLES

Grundig TK6	65 gns.
Cossor 1621	26 gns.
Loewe Opta 414	51 gns.
Loewe Opta 408	39 gns.
Fidelity Playmaster	21 gns.
Grundig EN3 Notebook	25 gns.
*Butoba	59 gns.
*Fi-Cord 202	66 gns.
Philips EL3300	25 gns.
Philips 3586	25 gns.
Stella 471	26 gns.
Uher 4000S	103 gns.
Telefunken 300	59 gns.

*Microphone extra

MAINS POWER PACKS

Philips, Stella or Cossor	£5.12.0
Butoba	11 gns.
Fi-Cord	£7.10.0
Uher 4000, with rechargeable cell	18 gns.

Tape Decks by Brenell, Wright & Wearite.
Tape to disc and copy service.

LEADING STOCKISTS OF EQUIPMENT FOR

TAPE and HI-FI

... and NO EXTRA FOR CREDIT TERMS

- ★ Minimum Deposit
- ★ No Interest or Service Charges on H.P. up to 18 months
- ★ Free Service during Guarantee Period

● MICROPHONES, MIXERS, ETC.

Grampian Reflector	£6.15.0
Grampian Ribbon	£11.10.0
Grampian DP/4 Dynamic	£8.5.0
Simon "Cadenza" Ribbon	£10.10.0
Reslo Pencil Dynamic	£11.12.6
Reslo Ribbon	£10.12.6
AKG D.119	24 gns.
AKG Stereo D.77A	£15.10.0
AKG D.19C	£17.10.0
TSL 3ch. Transistor Mixer	£2.17.6
Eagle Mixer	£2.19.6
Grundig Mixer Stereo	18 gns.
AKG K 50 Headphones	£7.10.0
Philips Pre-amp	£6.10.0

Also in stock: microphones by ACOS, FILM INDUSTRIES, TELEFUNKEN, BEYER, etc.

All WALGAIN PRODUCTS

● TAPES & ACCESSORIES

Standard, Long, Double, Triple Play in all sizes by all leading makers.

● DELUXERS BY WEARITE, WALGAIN

● Pre-recorded Tapes by Columbia, H.M.V. and all E.M.I. Labels, Saga, Turto-tape, etc.
Bib, Bond and E.M.I. splicers. Matching transformers. Plugs, sockets, etc.
Prices subject to alteration as announced by manufacturers.

STANDS OF ALL TYPES

HI-FI DEPT.

● STEREO AND MONO AMPLIFIERS

Quad Pye Rogers Cadet Mk III
Leak Armstrong Tripletone
Scott Loewe Opta B & O, CSL

● TUNERS

Quad Rogers Pye Leak
Armstrong B & O Tripletone

● LOUDSPEAKERS

Quad Pye Rogers W.B. Kef
Wharfedale Goodmans Tannoy
Lowther Leak Elac Eagle Kelly
B & O, SHB, Tandberg

● MOTORS, PICKUPS

GARRARD incl. Acos
AT6, 401, etc. Thorens
Goldring Tannoy EMI
Connoisseur Lenco Shure
DECCA incl. Ronette
ffss Mk. III latest Deram, etc. B & O
Philips SME Mk. II
Ortofon ADC BSR

All types of Diamond and Sapphire styli, stereo and mono. Microlifts, Garrard, Goldring, and Acos Pressure Gauges. Disc Preener. Acos Dust Bug. Cabinets by Record Housing and G.K.D.

169-173 STREATHAM HIGH ROAD, LONDON, S.W.16


Between St. Leonard's Church and Streatham Station

STReatham 0466/0192

Please note this is our only address
OPEN ALL DAY SATURDAY—EARLY CLOSING WEDNESDAY

equipment reviews

PHILIPS
EL3548

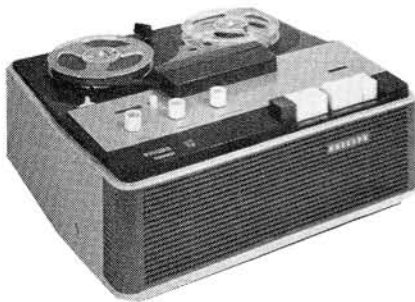

MANUFACTURER'S SPECIFICATION : Quarter-track two-speed domestic recorder. **Frequency response:** 60 c/s to 10 Kc/s at $1\frac{1}{2}$ i/s; 60 c/s to 13 Kc/s at $3\frac{1}{2}$ i/s, ± 3 dB. **Signal-to-noise ratio:** 40dB. **Spool Capacity:** 7in. **Power Output:** 2.2W. **Wow and flutter:** 0.6% peak-to-peak at $3\frac{1}{2}$ i/s. **Fast wind:** 1800ft. in two minutes. **Tone control** operative on replay. **Tape pause** button, with connection for foot-switch. **Facilities:** Mixing of microphone and high-level inputs. Parallel-track playback. Stereo replay and inter-track recording using EL3787 pre-amplifier. **Inputs:** Diode, Gram and Microphone. **Outputs:** Diode, External speaker, Headphones and Stereo. **Power requirements:** 50W approx. from 110, 127, 200-250V AC 50 c/s (60 c/s conversion). **Dimensions:** $15\frac{1}{2} \times 13\frac{1}{2} \times 6\frac{1}{2}$ in. **Weight:** 18lb. **Price:** £40 19s. **Manufacturer:** Philips Electrical Ltd., Century House, Shaftesbury Avenue, London, W.C.2.

A RECORDER for home and family pleasure, economical in tape and reasonable in price, backed by name and know-how . . . Tape without tears, in fact . . . this is a fair description of the Philips EL3548, such as its own advertisers might use. Perfectionists and other (hi-) fry need not apply—it does not record stereo, and needs extras to replay it; the machine has no $7\frac{1}{2}$ i/s nor will it follow CCIR or any other characteristic with bloodhound accuracy; its output will not shake floors unaided, neither will it enjoy internal tinkering.

It *does* offer: ease in setting up; real simplicity and versatility in use; smart modern design with performance and facilities to match. The makers have kept size and weight down, but unlike other slow-speed models the spools are not thereby limited to $5\frac{1}{2}$ in. or less; 7in. diameters are accommodated, giving really long uninterrupted runs.

TRANSISTOR PREAMPLIFIER

The circuit is a marriage of solid-state early stages with an ECL82 valve output and EM87 magic-eye—perhaps the best of both worlds at present. The mains-transformer and single motor with their hum-fields are located as far to the rear as possible, and a close-fitting shield is brought up to the record/playback head outside the pressure-pad; one might expect a higher signal-to-noise ratio than the 40dB claimed: measurement gave 39dB at $1\frac{1}{2}$, 42dB at $3\frac{1}{2}$ i/s.

Performance at either speed can be assessed by taking figs 1 (a) and (b) in conjunction; extending measurements rather beyond audibility in (b) points the causes of the somewhat restricted response from tape (a). Normally one would expect a test-tape (replay only) at the higher speed to give the best showing; the dotted curve obtained in this way is in fact the least extended, the overall record-play curves being better at both speeds— $3\frac{1}{2}$ i/s the solid-line, $1\frac{1}{2}$ i/s the circles.

STRAIGHT-THROUGH RESPONSE

After checking azimuth and possible errors I attacked the anomaly by plotting straight-through response in the record and play modes, with results shown in fig. 1 (b). The lower curve shows recording gain with frequency, test oscillator feeding the diode socket (input pin) and valve-voltmeter across the monitoring headphone sockets, with resistive load. This curve divides into two steep treble-peaks at 17 Kc/s ($3\frac{1}{2}$) or $11\frac{1}{2}$ Kc/s set to $1\frac{1}{2}$ i/s, the LF performance being

unaffected. The upper replay-curve also divides in the treble for each speed, and was obtained by matching the generator in place of the tape-head and measuring at the diode output.


The picture now clears—best slope of the replay curve is less than the desired 6dB per octave, being 5dB per octave around 500 c/s and 2.5dB or less per octave below 200 c/s. At the treble end, lift does not begin in earnest until 10 Kc/s and upwards, except for the record equalisation at $1\frac{1}{2}$ i/s whose effect is mirrored in the flattening at "F" of the circled record/replay curve before its final demise. At each speed the bass end of the overall curve in fig. 1 (a) is 3-4dB up on test-tape, showing the effect of bass emphasis in recording.

LISTENER'S TOTAL

What does all this add up to for the listener? There will of course be a scarcity of true bass, replaced by 'middle-bass', but if driving a fairly large extension-speaker in open cabinet, with bass resonances around 100 c/s—not uncommon in a domestic set-up—the response makes best use of available output by minimising overload and cross-modulation from the true-bass end, and may even be turned to advantage—shades of 'tailored response'. Likewise, any treble shrillness will be much less obtrusive, especially as the microphone knob becomes an unusually smooth treble-cut tone control on replay via speaker—not on the diode output, leaving the pre-amp user free to make up treble and bass as desired. The smooth declines of the test-tape curve make feasible a close approximation to flat response into an external power-amplifier by these methods, for replaying, say, $3\frac{1}{2}$ i/s pre-recorded tapes.

CONTINUOUS-RUNNING CAPSTAN

The EL3548 uses a continuous-running capstan with wide flywheel, belt-driven from alternative pulleys for speed-change, and I would expect rather better wow and flutter figures than those claimed in the specification. In fact the *Kalee meter* showed (RMS): total waver at $3\frac{1}{2}$ i/s - 0.25% (flutter 0.2%, wow 0.15%); at $1\frac{1}{2}$ i/s - total 0.3% rising in slow cycle to 0.4%, flutter component again 0.2%, wow now 0.25% (0.2% RMS = 0.56 peak-to-peak). Use of pre-recorded known low-wow tape on the machine showed a slight audible improve-

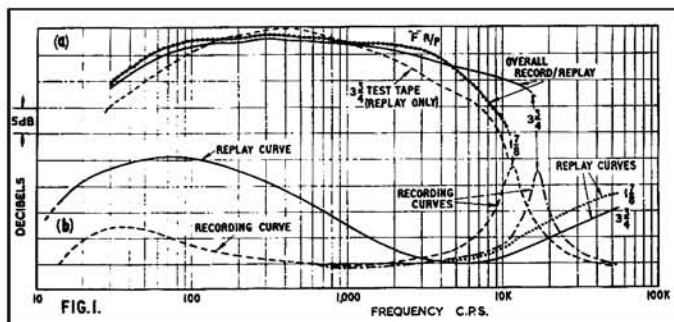

ment, but as the measured figures are not far off the spec. I suppose we must be satisfied. However, even these low figures are perceptible to a sensitive ear, and I did find a rubber inter-wheel driving take-up clutch with noticeable tyre-eccentricity and warp; also, grinder-marks are to be seen on the capstan-shaft.

To check on the possibility that the machine was not standard, I unobtrusively tried a 3 Kc/s good tape on another 3548 in the local dealer's and it sounded much better. Regret no fluttergrams—difficult to take under the circumstances, and it was Christmas-crowded too . . .

A fair review must mention also that rewind is rather slow—the 1200ft. $5\frac{1}{2}$ in. tape supplied took $2\frac{1}{2}$ minutes to wind on to similar spool (tight wind) and $2\frac{1}{2}$ minutes on rewind (one packslip). The rotation

(continued on page 131)

BRITAIN'S LARGEST TAPE RECORDER SPECIALISTS



As Britain's largest tape recorder specialists, we have on display over 300 models ranging from £15-£250. We are specialists in REVOX, FERROGRAPH, VORTEXION, BRENNELL, AKAI, BANG & OLUFSEN, SONY, TANDBERG and every other leading make of recorder available today.


Our Staff of keen recording enthusiasts offer expert assistance and friendly advice based upon many years experience in selling the finest and best tape recording equipment available.

Our Central London showrooms are easily reached, being close to famous Kings Cross and Liverpool Street Main Line Stations. If you are unable to call send today for our FREE 24 PAGE BROCHURE detailing the tremendous selection of recorders we stock and recommend.

CENTRAL LONDON SHOWROOMS

242/4 PENTONVILLE RD., N.1
Situating only 150 yards from KINGS CROSS Main Line Station, these superb showrooms are the most accessible in LONDON. Simply alight at Kings Cross Station. Ample parking space immediately outside with no restrictions whatsoever. Half-day: Thursday. TERMINUS 8200.

Open All Day Saturday



228 BISHOPSGATE, E.C.2
Almost immediately opposite LIVERPOOL STREET Main Line Station and next door to famous Bishopsgate Institute. Simply alight at Liverpool St. Station. Note: These Showrooms open MON.-FRI. 9 a.m. - 6 p.m. CLOSED ALL DAY SATURDAY. Open Sunday 9.30 a.m. - 2 p.m. BISHOPSGATE 2609.

ALSO AT

2 MARYLAND POINT STATION, STRATFORD, E.15 (ADJ. STATION), MAR 5879

205 HIGH STREET NORTH, E.6. (OPP. EAST HAM STATION) GRA 6543

Please forward your FREE 24 PAGE BROCHURE.

NAME
ADDRESS


Send to Head Office: Citex House, 191 Plashet Rd., London, E.13. Dept. T.R.4

CITY & ESSEX TAPE RECORDER CENTRES



HEAD DE-MAGNETISER

De-magnetises tape heads quickly and simply . . . Also for pin-point erasing on striped film and tape recordings—removes local unwanted noises without detriment. Has nylon-cushioned twin probes with a concentrated de-magnetising field in the $\frac{1}{8}$ " gap between the arms. Pistol grip. A.C. mains. Professionally designed for professional recording engineers. £2.10.0.



TAPE ERASER

Erases both sides of a 7" tape reel in 30 seconds and positively removes even the very low frequency portions of a recording. Use the WAL Tape Eraser, the only way to ensure an absolutely clean tape—quicker and better. Mains operated. Also erases sound from 16mm. film, 10" aluminium reels. Professionally designed for professional recording engineers. £6.18.6.

PRE-AMPLIFIERS



WAL pre-amps are made for every purpose. Fully transistorised, battery-operated, give high gain, completely hum-free. Laboratory built and fully tested. Professionally designed for professional recording engineers. Ask for details of WAL-GAIN Mono, £5.10.0, STEREO WAL-GAIN £7.10.0 and the superb WAL HI-GAIN with built-in switched equalisation for monitoring, dubbing, etc., etc. £7.16.0.

Free leaflets available on these professional aids to perfection . . . please write to :-



ELSTONE ELECTRONICS LTD

EDWARD STREET, TEMPLAR STREET,
LEEDS 2

ELECTRONIC WORLD

Audio Fair 22nd to 25th April. We are exhibiting under ideal acoustic conditions at the Tavistock Hotel. Regular recorded concerts to demonstrate not only our tape-free samples available—but other first class equipment, including Woollett speakers and Jobo turntables.

DE VILLIERS (Electronic World) LTD., 16D Strutton Ground, London, S.W.1

STANDARD PLAY (PVC Base)		LONG PLAY (Prestressed Polyester Base)	
3" / 150ft.	4 for 18/-	3" / 225ft.	4 for 22/-
	48/- doz.		60/- doz.
4" / 300ft.	4 for 26/-	4" / 450ft.	2 for 21/-
5" / 600ft.	2 for 26/-	5" / 900ft.	2 for 35/-
5½" / 900ft.	16/-	5½" / 1,200ft.	24/-
7" / 1,200ft.	19/-	7" / 1,800ft.	31/-
DOUBLE PLAY (Prestressed Polyester Base)		TRIPLE PLAY (Prestressed Polyester Base)	
3" / 375ft.	2 for 20/-	3" / 465ft.	2 for 26/6
	108/- doz.		150/- doz.
4" / 600ft.	2 for 30/-	3½" / 650ft.	17/-
5" / 1,200ft.	27/-	4" / 900ft.	23/6
5½" / 1,800ft.	35/-	5" / 1,700ft.	40/-
7" / 2,400ft.	45/-	5½" / 2,300ft.	52/6
		7" / 3,300ft.	80/-

I enclose £ s. d. NAME.....

ADDRESS.....

BLOCK CAPITALS PLEASE CASH WITH ORDER

POST FREE · SEND COUPON NOW—

counter is four-figure, instant reset, and showed an error of only three final digits over the distance. But bearing in mind the recorder's purpose, may one also give due weight to the following:

The placing and marking of controls in three groups of three, six large tablets and three knobs for everything, make operating simple and easily learned. The left-hand knob switches on, and the red left-end RECORD tablet is pressed; advancing remaining knobs shows the incoming signals on magic-eye—microphone on right-hand knob and mixing in radio/gram or another recorder by the centre knob. The transparent red centre-clip on the eye simplifies level-setting; signals can be heard at any convenient volume by advancing the combined on/off switch and gain control and this is also the straight-through amplifier mode. Three-finger control on either group of tabs from now on—to record, still listening, press the outer tabs together in the left-hand group (RECORD and PLAY). Pressing PLAY alone releases the red tab, as a safeguard against accidental erasure.


PAUSE CONTROL

The centre tab of this trio (PAUSE) gives temporary stop and may be held or locked down without scraping of oxide against the capstan; the tape-angles prevent this in play while offering a straight drop-in slot when loading. Pause action is duplicated by an optional foot-control, a non-electrical Bowden-cable action which screws in at the rear. The run completed, tape can be fast-wound either way—without necessarily stopping—by three-finger control of the right-hand group of tabs: REWIND at the left, fast forward WIND to the extreme right and STOP in between, which cancels all. WIND and REWIND cancel RECORD/PLAY instantly, without smearing the recording at the reversal point, and tape-wind can be reversed at will for inching by alternating pressure on the outer pair. Hardly any single-motor machines have had this feature to date; interlocks are usually arranged to prevent one operation running into the next, operation of the stop-button being mandatory each time.

EASY EDITING

For editing, chinagraph-pencil marking is made easy by a lid on the front head-cover which slides forward and unclips. One screw releases the back section for cleaning heads, etc. Four more screws are removed for internal attention, one behind each spool and one each side, and I have never seen a domestic machine whose 'works' can be uncovered so elegantly. Instead of a drop-in chassis, top-plate and sides of the cabinet are integral, and once the knobs are pulled off the complete 'overcoat' lifts away. The carrying-handle slides away through the socket cut-out at the right to ease the unveiling.

To replace the output valve or the fuse beside it is even simpler: the plastic bottom-plate only is removed (four bolts in the feet) and this carries a rubber-beading all round its edge to engage plastic finger-mouldings on the cabinet-sides when replaced, eliminating cabinet-buzz at high volume.

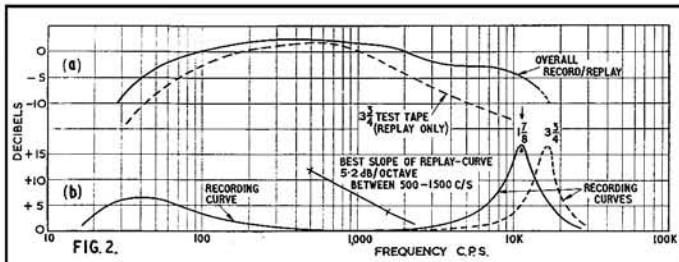

Many electrical devices in one-room flats, etc., are used from bayonet-adaptors or other two-pin sources, and Philips provide twin mains lead (no earth-wire)—hum-loops at least are unlikely with the arrangement, and earthing, if required, can be taken to the lower wander-plug (headphones); the socket is marked with the earth symbol, and makes through to chassis. There is no exposed metal apart from sockets, and their mounting-plate is shielded by an engraved plastic fascia.

(continued overleaf)

YOUR TAPE DEALER
London Area

Disc and Tape Reproducing Equipment and Tape Recorders
by Leading Manufacturers

Custom Built Installations

All High Fidelity Requirements and Services Available

Estimates Free

Personal Service

Custom High Fidelity

371 Green Lanes, Palmers Green, N.13 PALmers Green 5228



**FOR ALL LEADING
AUDIO EQUIPMENT**

call, write, or telephone

hampstead HIGH-FIDELITY

91a Heath Street, Hampstead, London N.W.3 Telephone HAMPstead 6377



ALL LEADING MAKES IN STOCK

Cash or Easy Terms

LONDON'S FINEST SERVICE

207 EDGWARE ROAD, W.2

PAD 3271/2

152-153 FLEET STREET, E.C.4. FLE 2833

33 TOTTENHAM COURT ROAD, W.1. MUS 2605

★ PART EXCHANGES WELCOMED ★

- ★ ALL MAKES Hi-Fi and Tape Recorders supplied
- ★ PART EXCHANGES. Terms 12, 18 or 24 months
- ★ SONY Specialists. Full Range Stocked
- ★ GUARANTEED Recorder Repair Service

MAC'S CAMERA SHOPS LIMITED

250-252 KING STREET, HAMMERSMITH, LONDON, W.6
RIV 8581-2 Hours 9-6 Thursday 9-1

SHEEN TAPE RECORDER CENTRE

SPECIALISTS IN TAPE RECORDERS, ACCESSORIES, HI-FI EQUIPMENT
YOUR CENTRE FOR FRIENDLY HELP—SALES AND SERVICE

8 STATION PARADE,
SHEEN LANE, SHEEN,
LONDON, S.W.14

Showrooms Open until 7 p.m.
PROSPECT 0985
(Opposite Mortlake Station S.R.)

WIMBLEDON'S

TAPE RECORDER CENTRE

Agents for: FERROGRAPH, VORTEXION, SIMON,
BRENELL, GRUNDIG, PHILIPS, COSSOR, ETC.

GET IT TAPED THE EXPERT WAY—By letting us install your apparatus

TEL-LEE-RADIO

LiBerty 4946

220 The Broadway, WIMBLEDON, S.W.19

Cheshire

STOCKPORT

FAIRBOTHAM & CO. LTD.

47 LOWER HILLGATE STO 4872
FERROGRAPH, REVOX, TANDBERG, BRENELL,
SIMON, TRUVOX, SONY, PHILIPS, MAGNAVOX,
GRUNDIG, TELEFUNKEN

All models on comparison demonstration
Evening demonstrations by appointment

Devon

PLYMOUTH

TOM MOLLAND LTD.

102 CORNWALL STREET Phone 69282

FERROGRAPH, REVOX, TANDBERG, SIEMENS, AKAI, UHER, SONY,
B & O STEREO MASTER, FI-CORD, AND

The largest selection of Hi-Fi equipment in the West

— YOUR TAPE DEALER —

Gloucestershire

CHELTENHAM

MODERN RADIO (Cheltenham) LTD.

Service and Hi-Fi Dept. 40/42, St. James Street
Ferrograph, Revox, Telefunken and Truvox always in stock
 TELEFUNKEN appointed Service Agent
 Phone: Cheltenham 21216/7

Hampshire

BOURNEMOUTH

NATIONAL RADIO SUPPLIES

66 Holdenhurst Road
 Bournemouth

Tape, Hi-Fi & components Tel. 25232

HAMILTON ELECTRONICS

HIGH FIDELITY AND
 TAPE RECORDER
 SPECIALISTS

35 LONDON ROAD

TEL. 28622

SOUTHAMPTON

Lancashire

NOT THE LARGEST SELECTION
 NOT THE CHEAPEST SELECTION
 JUST THE BEST SELECTION

No High Pressure Sales—Just High Pressure SERVICE After Sales
 Manufacturers' Official Agents for:—
 REVOX, TANDBERG, TELEFUNKEN, GRUNDIG, B. & OLUFSON, SONY,
 "Q", CORD, etc.

Largest Selection of Pre. Rec. Tapes in the North
 SPARES, ACCESSORIES and "EXPERIENCE"
"THE" TAPE RECORDER CENTRE (Blackpool), 266 WATERLOO ROAD
 Tel. 45049

H. D. KIRK

Stereolectrics
LIMITED

Specialists in High Fidelity

Phone: 23093

150 HIGHER BRIDGE STREET

BOLTON

MANCHESTER LANCASHIRE HI-FI LIMITED

and now incorporating
 The Tape Recorder Specialists
 DIXONS ELECTRONIC (Sales and Service)
8 DEANS GATE (NEXT TO GROSVENOR HOTEL)

Leicestershire

LEICESTER

ALL YOUR HI FI REQUIREMENTS

Speakers by: H.M.V. QUAD LEAK ROGERS
 TANNOY MORDAUNT LOWTHER W.B.

Tape: WHARFEDALE GOODMAN'S
 FERROGRAPH REFLECTOGRAPH GRUNDIG
 SIMON BRENELL

Record Department: ALL LABELS-PARASTAT SERVICE
LEICESTER CO-OPERATIVE SOCIETY LIMITED, High Street, Leicester. Tel. 20431

Northamptonshire

PETERBOROUGH, NORTHANTS

Tel: 5643/5644

GAMPKINS RECORD SHOP

RECORD TAPE AND HI-FI EQUIPMENT SPECIALISTS

NEW
 ADDRESS

15 LONG CAUSEWAY
 (IN CITY CENTRE)

LARGE
 STOCKS

PHILIPS EL3548 CONTINUED

A final point—do not press WIND and REWIND together; the interlocks are ingenious, but not that clever, and the motor will promptly stall, stretching the unfortunate tape in the process!

POSTSCRIPT

Further to feelings that the specimen I tested might possibly be an unlucky one, I was glad to have the opportunity of testing another sample kindly provided by Philips. The procedure was to take another series of measurements for the more interesting parameters and replot them, and of course, to measure the wow figures again of depending on aural assessment.

The differences found were no more than might be attributed to the normal spread of tolerances in production. In fig. 2 (a) the same test-tape failed once again to give as wide or even response as the overall record/play results, for the same reasons of pre-emphasis already discussed in the body of the article, and visible in the new version of fig. 2 (b) curves. The straight portion of the replay-response is also shown, and its slope of 5.2dB per octave is only marginally better than the 5dB/oct. of the original.

BETTER APPEARANCE

The appearance of the salient parts of the tape-transport was much better, and the wow figures showed an improvement. They are RMS in all cases: 3½ i/s, flutter 0.16%, wow 0.15%, total 0.2% to 0.25%; 1½ i/s, flutter 0.2%, wow 0.25%, total 0.25% to 0.35%. The values for total waver again showed the same slow cycling between the figures given, as various components came in and out of step.

Remaining impressions were substantially the same, except for two very small faults. Pressure of the PLAY tab to its bed while using the diode socket to feed external systems on replay caused disappearance of the external signal—without, however, affecting sound from the internal loudspeaker. Also, it is not advisable to snap home the cover to the mains-cable stowage compartment, relying on the locking spring to latch home with a click; it flew off with a snap, owing to the plastic pips which secure it shearing off. Am hopeful of what Araldite may do . . .

B. R. J. Plumtree.

RECORDING BIRD SONG CONTINUED

The answer is a microphone preamplifier. Gain may have to be reduced somewhat with an attenuator if it is a general purpose type such as a Walgain.

A long length of cable, say 100ft., is used with the preamplifier near the microphone. If an attenuator is used this should be near the recorder.

Every bit of the microphone circuit must be screened, and waterproof as dawns are usually damp.

The reason for having the preamplifier near the microphone is that 100ft. of cable generates noise. This noise would be amplified if the preamplifier were near the recorder.

Recording shy birds with this technique is very like fishing. You place your microphone in a likely spot, keep out of sight and wait.

A dawn chorus requires some consideration. Do not place your microphone in the woodland but to one side of it, say 100ft. or perhaps a bit more. Do not place it in a tree either or you may find some Blackcap doing his little black nut about two feet away from the microphone and overloading your equipment. In the second place, pigeons bumbling in the tree top will transmit sound through the tree to your microphone. The resultant effect is rather like moving furniture upstairs.

Bird song commences in January and a dawn chorus will be at its peak in May at about 4 a.m. If you are after a dawn chorus put everything ready to snatch up or you will never make it in time. The best time for skylarks is about one hour before the dawn chorus, so if you want the rising lark in June you had better stay up all night. Next month we will take a look at the individual birds in greater detail.

CLASSIFIED ADVERTISEMENTS

Advertisements for this section must be pre-paid. The rate is 6d. per word (private), minimum 7s. 6d. Box Nos. 1s. 6d. extra; trade rates 9d. per word, minimum 12s. Box Nos. 2s. extra. Copy and remittance for advertisements in **MAY 1965** issue must reach these offices by **18th MARCH** addressed to: The Advertisement Manager, Tape Recorder, Link House, Dingwall Avenue, Croydon, Surrey.

Replies to Box Nos. should be addressed to the Advertisement Manager, Tape Recorder, Link House, Dingwall Avenue, Croydon, Surrey, and the box no. quoted on the outside of the envelope. The district after box no. indicates its locality.

PERSONAL

Need extra income? Then if you have a Tape Recorder we invite you to become a spare time home demonstrator of our famous Language Recordings. Excellent commissions on all your sales. Further details from Languator Recordings Ltd., Milton Street, Brixham, S. Devon.

FOR SALE

Akai X IV latest stereo batt/mains 4 track 4 speed portable. As new, cash £90. Smithson, 95 Waddington Road, Clitheroe, Lancs.

Tape Recorder vols. 5, 6. Hi-Fi News vols. 7, 8. Perfect. 14/6 per vol. Box No. 375 (Liverpool).

WAL 2 Hi-Gain Pre-Amplifiers, 1 Tape Eraser. Offers? Ring Alder VIC 6677 (Day).

Transistor Sanyo Tape Recorder. Two speed. Latest model—as new. Cost £34. Accept £25 o.n.o. Phone Mr. Truman, evenings, after 7.30 p.m. AMB 8211.

Grundig TK 60 U stereo tape recorder. Detachable speakers, 2 microphones and 3 tapes. Little used and as new, will accept £65. Cost £145. Alexander, 648 Bath Road, Taplow, Maidenhead.

3 speed disc cutter, matching amplifier, £70. 7½ i.p.s. twin track battery-portable, £40. Municipal 3257 (Croydon).

TRADE

Lafayette "International" Tape. Polyester:—7in. 2400ft. 22/6; 5½in. 1800ft. 19/-; 7in. 1200ft. 14/-; 7in. 1800ft. 19/-; 7in. 1200ft. 12/-. Acetate: 7in. 1800ft. 14/9; 5in. 900ft. 10/6; 5in. 600ft. 8/-. Refund guarantee. 'Bib' Tape Splicer, 14/11. We also have a full range of Message Tapes and Triple Play Tapes all at lowest ever prices. P. & P. 2/- per order. S.A.E. list. Leda Tapes, 27 Baker Street, W.1.

Records:—45 & 33/1-3 R.P.M. Classics, Pop, Swing, etc. 6d. stamp for latest lists. Dept. T.R., Audio Productions, 23 Deerpark Road, Holbrooks, Coventry, Warwickshire.

A Unique Buy! Recording tape, top brand. 7in. 2400ft. D.P. 25/-, 5½in. 1200ft. 19/6, P. & P. 1/6 per spool. Bargains in all sizes. S.a.e. for list. We repair, buy and sell recorders. E. C. Kingsley & Co. Ltd., 132 Tottenham Court Road, London, W.1. EUSton 6500.

Pre-recorded tapes. Unique complete catalogue listing all makes mono, stereo, 7½ and 3¾ i/s including World Record Club tapes. Call for free copy or send 1s. mailing fee. Dept. T.R.3, Teletape Ltd., 33, Edgware Road, W.2. Phone: PAD 1942.

continued on page 134

YOUR TAPE DEALER

Oxfordshire

WESTWOOD'S of
46 GEORGE STREET
PHONE: 47783
OXFORD

Staffordshire

Audio Electronics (Midlands) Ltd.
Specialists in Dictation Mcs., Tape Recorders, Inter Com., Tapes and Accessories
Full After Sales Service on all Equipment
PHILIPS, GRUNDIG, TRUVOX, UHER, ETC.
203 STAFFORD STREET, WALSALL Tel.: 21086

Surrey

FARNHAM, SURREY
The finest selection of Tape Recorders, Hi-Fi Equipment and quality Radiograms in the Provinces is awaiting you at:—
LLOYD & KEYWORTH LTD
26-27 Downing Street, Farnham, Surrey. Telephone: 5534
Comparative Demonstrations, Large stock of Cabinets and Pre-Recorded Tapes.

CROYDON'S TAPE RECORDER CENTRE

All leading makes in stock. Hi-Fi equipment, cabinets, etc.
Service agents for AKAI Tape Recorders

SPALDING ELECTRICAL LTD.,
352/354, Lower Addiscombe Road, ADDiscombe
CROYDON 1231/2040

Sussex

WORTHING, SUSSEX
Stocking Ferrograph, Revox, Sony, Tandberg, Truvox, Philips, EMI, Luxor, etc., on fully comparative Demonstrations
BOWERS & WILKINS LTD.
1 Becket Bldgs., Littlehampton Road, Worthing 5142

NEW PREMISES
NEW PREMISES
NEW PREMISES 132 montague street
CRAY telephone 25985
CRAY OF WORTHING LTD

Warwickshire

COVENTRY & DISTRICT CO-OPERATIVE SOCIETY LTD.
HIGH FIDELITY SOUND EQUIPMENT TASTEFULLY DISPLAYED FOR YOUR "BROWSE AROUND" ENJOYMENT
All leading makes: Amplifiers, Control Equipment, Loud-speakers, Cabinets, Tuners, Microphones, Tape Recorders and Ancillary Items in stock or quickly obtainable.
Coventry & District Co-operative Society Ltd., High Fidelity Sound Section, Electrical Dept., First Floor, Central Premises, Corporation Street, Coventry. Tel. Coventry 24031-10 lines

AUDIO & TAPE SALES & SERVICE. HIG. 4182
COLIN G. TURNER M.I.P.R.E.
QUAD. LEAK. ROGERS. TANDBERG. TRUVOX. BRENELL
All makes in stock and on demonstration
39 YORK ROAD, KINGS HEATH, BIRMINGHAM 14

CLASSIFIED ADVERTISEMENTS

TRADE continued

Speedy and Expert Tape Recorder and Hi-Fi repairs by England's leading Hi-Fi Specialists. Telesonic Ltd., 92 Tottenham Court Road, London, W.1. MUS 8177.

Pre-sleep Study. Learn difficult lessons or parts or improve your mental power while you sleep! Send now for price list of materials; including the perfect tape machine, time switch, pillow speaker, endless tape cassettes, pre-recorded tape for learning or therapy, language course, etc. Psychology Tapes Ltd. (TR), 16 Kings College Road, London, N.W.3. PRI 3314.

If quality matters consult Sound News Audio Supply for better terms. 60 page photographically illustrated Hi-Fi catalogue 4s. 6d. Part exchange, servicing. Your precious tapes transferred to unbreakable L.P.s by specialists. Specify requirements. 10 Clifford Street, London, W.1.

Learn while you sleep. Details of tapes, subjects and equipment from: The Sleep-Learning Association, 14 Belsize Crescent, N.W.3

TAPE EXCHANGES

Girls everywhere are especially invited to belong to Britain's largest, friendliest tape exchange. We guarantee you all the friends you need! Particulars from Worldwide Tapetalk, 35 The Gardens, Harrow.

WANTED

Lee Electronics. The Tape Recorder and Hi-Fi Specialists wish to purchase good quality Tape and Hi-Fi Equipment for cash. 400 Edgware Road, W.2. Phone: PADdington 5521.

Highest cash prices offered for good quality Tape Recorders and Hi-Fi. See our ad. page 118 this issue. R.E.W., 266 Upper Tooting Road, London, S.W.17.

STUDIO FACILITIES

Discs cut, all speeds, from your tape. Reduced prices. Microgroove 7" 17/6, 10" 37/6, 12" 43/-. Satisfaction guaranteed. West Herts Sound Recording, 9 Tring Road, Northchurch, Berkhamsted, Herts.

John Hassell Recordings. Tape to Disc. Latest high level microgroove cutting system. Competitive prices. Studio and Mobile services. 21 Nassau Road, London, S.W.13. RIVerside 7150.

Rapid Recording Service, 78s and L.P.s. from your own tapes. (48-hour service.) Master Discs and pressings. Recording studio. Mobile recording van. Manufacturers of the Sleep-o-Matic Unit. Foreign language courses available for sleep-learning. Brochures and price lists on request from: Dept. T.R.21, Bishops Close, London, E.17

— TAPE TO DISC SERVICES —

The following are members of the Association of Professional Recording Studios who can be relied on to give satisfaction

MJB RECORDING & TRANSCRIPTION SERVICE

specialise in the production of microgroove records from Professional and Amateur recordings (Acetate copies; Mono and Stereo pressings). Extended playing times achieved by controlled cutting techniques. Studio, Mobile, "Off the Air" and all recording services. Detailed booklet available.

7 HIGH STREET, MAIDENHEAD (Tel: 25630)

TAPE RECORDERS - AUDIO EQUIPMENT - DISC CUTTING STD & LP FROM TAPE - STUDIO FACILITIES - HIRE SERVICE - SALES - EXCHANGES

MAGNEGRAPH

1 Hanway Place, London, W.1.

Tel.: LAN 2156

— YOUR TAPE DEALER —

Wiltshire

SOUTHERN ENGLAND

HI-FI AND RECORD CENTRES

J. F. SUTTON

SALISBURY
18 QUEENS STREET

SOUTHAMPTON
421 SHIRLEY ROAD

Yorkshire

SHEFFIELD HIGH FIDELITY

HI-FI EQUIPMENT AND TAPE RECORDERS

FULL DEMONSTRATION FACILITIES
SPECIALIST REPAIR SERVICE
ALL LEADING MAKES STOCKED

Tel. 20588 10 WEST STREET, SHEFFIELD, 1

TAPE RECORDER CENTRE (HALIFAX)

Stock all the best Tape Recorders; Hi-Fi Equipment; Tape; L-P Records, etc.

DEMONSTRATIONS DAILY BY EXPERT STAFF
2 years FREE SERVICE ON NEW RECORDERS over £35

30 King Cross Street, Halifax. 'phone 66832

Scotland

Edinburgh's TAPE RECORDER

specialist

Hi-Fi Corner

Ferroglyph—Grundig—Telefunken—Philips, etc.
W. G. Graham, Assoc. Brit. I.R.E.

1 Haddington Place,
EDINBURGH.

Tape to Disc Recording Service

Phone WAY 7901

Agent for The Famous Heathkits.

ADVERTISERS' INDEX

	Page
Adastra Ltd.	114
BASF Chemicals Ltd.	outside back cover
Braddock, C., Ltd.	114
Brenell Engineering Co. Ltd.	116
Brown, A., & Sons Ltd.	128
City & Essex Tape Recorder Centres	130
D.I.Y. Gardening Annual	120
De Villiers (Electronic World) Ltd.	130
Educational Recordings Ltd.	126
Elstone Electronics Ltd., Tandberg	97
Elstone Electronics Ltd.—W.A.L.	130
Ever Ready (Great Britain) Ltd.	98
Francis of Streatham	128
Grampian Producers Ltd.	120
Grundig (G.B.) Ltd.	104
Heathkit (Daystrom) Ltd.	95
Howard Tape Recorders	inside back cover
Ilford Ltd.	inside front cover
Kodak Ltd.	110
Lustraphone Ltd.	114
Mastertape (Magnetic) Ltd.	94
Multicore Solders Ltd.	114
National	100
Philips Electrical Ltd.	96
Pullin Photographic Ltd.	92-93
R.E.W. (Earlsfield) Ltd.	118
Recorder Co., The	120
Rent-a-Tape Ltd.	126
Reps (Tape Recorders) Ltd.	122
St. Aldate Warehouse Ltd.	91
Tape Recorder Centre	108
Unilet Products Ltd.	102
Walker, N.	126

COSSOR KEF WHARFEDALE BUTOBA DECCA garrard quad JASON uher
 PYE GOODMANS ARMSTRONG
 LOWTHER STELLA PHILIPS WYNDSOR elizabethan
 ROBOK GRUNDIG rogers LOEWE TELEFUNKEN FICORD
 SONY truvox TANDBERG Bando

ALL ON
 INTEREST
 FREE
 HP
 at

HOWARD

218 HIGH ST. BROMLEY KENT. RAV. 4000

- ★ TAPE RECORDERS—MONO, STEREO or BATTERY
- ★ TUNERS, AMPLIFIERS, LOUDSPEAKERS & ENCLOSURES
- ★ GRAM TURNTABLES, PICK-UPS & CARTRIDGES
- ★ PORTABLE TRANSISTOR RADIOS & RECORD PLAYERS
- ★ ALL TAPES & TAPE ACCESSORIES
- ★ SECONDHAND & PART EXCHANGES

If it's good quality, we stock it. If we stock it, you can buy it on free H.P.—no interest charges. If you buy it, we will deliver it free anywhere in Great Britain. After we have delivered it, we guarantee it with free servicing for 12 months.

If you want free brochures on all the best makes, together with details of all our terms and offers, write or phone us straight away.

Please indicate interests :

TAPE RECORDERS

Mono under £50

Mono over £50

Stereo

HI-FI

Amplifiers and Tuners

Speakers and Enclosures

Turntables and Arms

Portable Radios and Grams

HOWARD

TAPE RECORDERS · HI-FI

218 HIGH ST. BROMLEY. KENT. RAV. 4000



ON **BASF** LETTER TAPES SPECIALLY PACKED FOR MAILING



BASF LETTER-TAPE enables you to talk to relatives and friends anywhere in the world. **BASF** insistence on highest quality production makes the Letter-Tape extra sensitive to capture every shade of expression. Delight your friends far away—let them *hear* your news on the 150 feet long-play tape specially made for mailing. The lightweight **BASF** Letter-Tape comes complete with mailing carton and reply labels, and costs only 5/6d.



—SYMBOL OF
AUTHENTIC SOUND



BASF CHEMICALS LIMITED, 5a GILLESPIE ROAD, LONDON, N.5. TEL: CANonbury 2011