

OCTOBER 1959 · TWO SHILLINGS

Show Technical Review

Wireless World


PAGE 94-95 MOLLARD ADVT. FOR POWER GERMANIUM TRANSISTORS

ELECTRONICS

Radio · Television

PAGE 467 TRANSISTOR RECEIVER, PART 2.
70

PAGE 108 EDISMAN OUTPUT TRANSISTORS ADVT. GERMANIUM

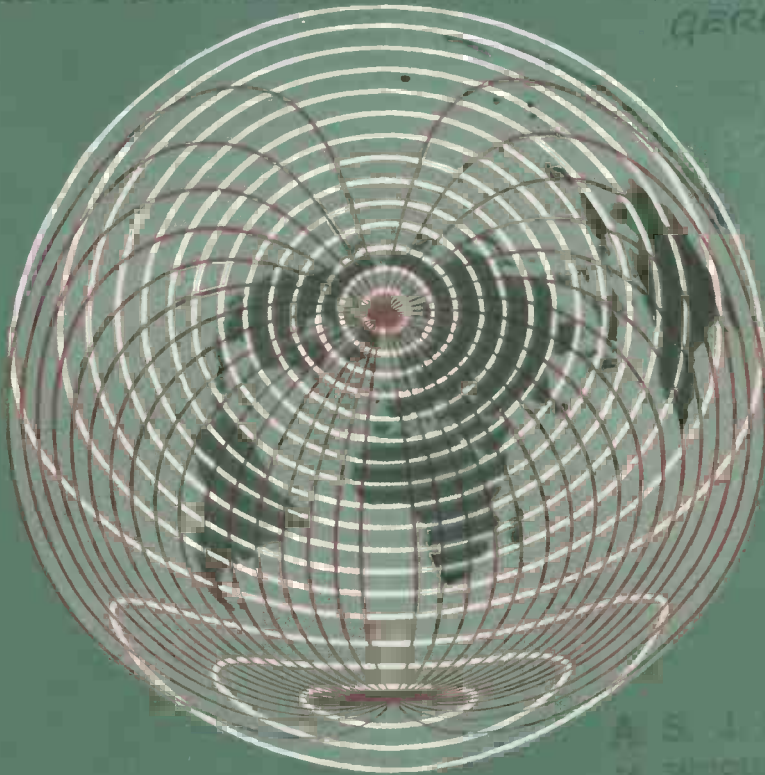


A. S. J. SHERMAN
14 MOLLARD ROAD,
CHICHESTER, SUSSEX

FORTY-NINTH YEAR OF PUBLICATION

BICC Ground Control Cables are used exclusively for the English Electric THUNDER-BIRD which is now in service with the British Army.

BICC design and manufacture a wide variety of control cables for both ground and airborne use. Standard types are also available for ancillary equipment such as ground radar, centimetre radio links and closed circuit television.



BICC

*ground
control
cables*

for the 'ENGLISH ELECTRIC'

Thunderbird

Crown copyright.

Wireless World

ELECTRONICS, RADIO, TELEVISION

OCTOBER 1959

Managing Editor:

HUGH S. POCOCK, M.I.E.E.

Editor:

F. L. DEVEREUX, B.Sc.

Assistant Editors:

H. W. BARNARD

T. E. IVALL

VOLUME 65 NO. 9

PRICE: TWO SHILLINGS

FORTY-NINTH YEAR

OF PUBLICATION

- 421 Editorial Comment
- 422 What Goes Wrong with TV? *By W. Oliver & J. Elworthy*
- 426 International Congress on Acoustics
- 429 Airshow Electronics
- 432 World of Wireless
- 434 Personalities
- 435 News from the Industry
- 437 The National Radio Show—in Retrospect
- 448 Elements of Electronic Circuits—6 *By J. M. Peters*
- 449 International Firato in Amsterdam
- 451 Technical Notebook
- 453 Hum, Rumble and Noise *By R. E. Cooke*
- 456 Paris Radio Show
- 457 Short-wave Conditions
- 458 Ferroelectrics—3 *By J. C. Burfoot*
- 463 Ferrite-Cored Aerials *By "Cathode Ray"*
- 467 Designing a Transistor Receiver—2. *By T. Snowball*
- 470 Forthcoming Meetings
- 472 Random Radiations *By "Diallist"*
- 474 Unbiased *By "Free Grid"*


Offices: Dorset House, Stamford Street, London, S.E.1

Please address to Editor, Advertisement Manager,
or Publisher, as appropriate

© Iliffe & Sons Ltd. 1959. Permission in writing from the Editor must first be obtained before letterpress or illustrations are reproduced from this journal. Brief abstracts or comments are allowed provided acknowledgment to the journal is given.

PUBLISHED MONTHLY (4th Monday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. Telephone: Waterloo 3333 (65 lines). Telegrams: "Iliffepres, Sedist, London." Annual Subscriptions: Home and Overseas £1 15s. 0d. Canada and U.S.A. \$5.00. Second-class mail privileges authorised at New York, N.Y. BRANCH OFFICES: BIRMINGHAM: King Edward House, New Street, 2. Telephone: Midland 7191. COVENTRY: 8-10, Corporation Street. Telephone: Coventry 25210. GLASGOW: 26B, Renfield Street, C.2. Telephone: Central 1265. MANCHESTER: 260, Deansgate, 3. Telephone: Blackfriars 4412. NEW YORK OFFICE: U.S.A.: 111, Broadway, 6. Telephone: Digby 9-1197.

FRAME GRID VALVES FOR TELEVISION

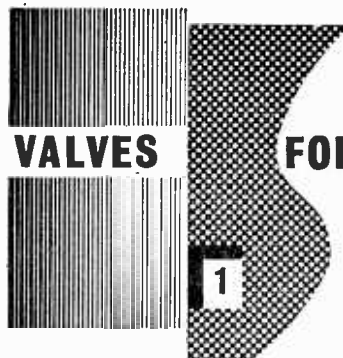

INTRODUCTION

The introduction of frame grid valves into the signal and intermediate frequency stages of the television receiver is a substantial and significant advance. When used in circuits which are not radically different from present practice, frame grid valves greatly increase the gain which is obtainable in the successive stages. Thus, a tuner designed round frame grid valves can have an overall gain of say 58dB, compared with the 48dB or so obtained with conventional valves. A major improvement is also obtainable in the i.f. stages. In receivers which have used three video i.f. stages, only two are now required.

BETTER PERFORMANCE

The advantages provided by frame grid valves may be summed up as: more gain per stage, better signal-handling ability, improved noise factor, and reduced cross-modulation.

A 'frame-grid' receiver in the normal reception areas shows a better performance for a given signal at the aerial. In fringe areas the improved performance can mean that specially modified receivers or elaborate aerials will often be unnecessary; the fringe area is, in fact, pushed further out, while, close to the transmitter, the risk of sound-on-vision is much reduced.

HIGH SLOPE

A frame grid valve is a high slope valve. In particular, it is a valve with an increased ratio of slope to grid-anode capacitance: that is, it has a good 'figure of merit', and high stage gain is achieved with the minimum of capacitive loading and loss of bandwidth.

High slope is a question of valve geometry. Briefly, for high slope it is necessary to have thin and closely-wound grid wires, and a very small clearance between grid and cathode. The obvious mechanical limitations to the achievement of high slope have been countered by the use of the frame grid. This device is a stiff rectangular frame on which extremely thin grid wires are wound under tension. The side-pieces of the frame are made to close tolerances, so that the finished grid consists of two perfectly flat, rigid, and parallel meshes of fine wire which are held a precise distance apart. A precision cathode is inserted between these meshes, and the

required grid-cathode clearances are ensured by suitable mounting arrangements.

With this sort of technique there is a much reduced need to make allowances for mechanical irregularities or for initial distortion or subsequent displacement of the grid windings. In fact the clearance between cathode and grid can be reduced to give slopes twice as great as those of conventional valves without risking grid-cathode shorts.

TELEVISION RANGE

The first Mullard frame grid valve for television is the PCC89 double triode for cascode r.f. stages. It is already widely used. Three more types will be introduced shortly: the PCF86 triode-pentode frequency changer; the EF183 variable-mu pentode for sound or vision i.f. stages; and a straight i.f. pentode, the EF184.

The EF183, which will be discussed in detail in the next advertisement in this series, has a slope of 12.5mA/V, comparing with 6.0mA/V for the EF85. The improvement in gain is of the order of 6dB in each i.f. stage.

The PCF86 has a slope of 12mA/V, compared with the 6.2mA/V of the PCF80, and the conversion conductance is 4.5mA/V instead of 2.1mA/V. Use of the PCF86 doubles the gain of the mixer stage. A substantially improved noise factor is obtained in a front end in which the PCF86 is preceded by the PCC89.

CIRCUITS

It should be noted that these new types cannot be used as direct plug-in replacements for earlier types. Valve pinning may not be the same; and, in any event, the improved characteristics of the frame grid types necessitate changes in circuit values. Detailed information will be given in subsequent advertisements.



PCC89



MULLARD LIMITED

MULLARD HOUSE,
TORRINGTON PLACE,
LONDON, W.C.1

International Conferences

SOME while ago we discussed the activities of engineers in association and the value of discussion in groups which ranged from the chance meeting of individuals to the formal meetings of the established institutions and learned societies. We did not then extend the argument to the even larger gatherings of the international congresses, conventions and symposia which now seem to be growing in number and frequency. Although in our field the convention and the conference are never likely to be used just as an excuse for an outing, or to become as conspicuous a part of national life as they are in America, it is nevertheless significant that one begins to recognize familiar faces at many of the events covered by this journal in the course of the year. As things go it will soon be a whole-time job to go the rounds. Indeed, the French have already coined a word, *congressistes*, which seems to accord tacit recognition of the vocational attributes of the participants.

International conferences have many advantages and fulfil many functions, perhaps the most important of which is the provision of a focal point in time and place for stocktaking. In accepting membership of a congress one sets aside a period for revision, for the absorption of new ideas and for a chance to see one's own work in perspective against the broader horizons of the subject.

Second, it humanizes the often arid processes of disseminating information. It enables us, so to speak, to judge the character of a witness under cross-examination; ultimate decisions will be made objectively, as they are in interpreting civil law, but the early processes of assessing new scientific knowledge are often helped if one has heard the evidence rather than read the "court proceedings." A congress is also the occasion for innumerable informal discussions outside the conference hall, and, as Professor Ingerslev said in closing the formal proceedings of the I.C.A. in Stuttgart, there is also a build-up and a decay time which considerably extends the usefulness of every event of this kind.

Finally, the published proceedings of a conference bring together in one volume information which would otherwise remain scattered throughout the literature. The Radiolocation Convention organized by the I.E.E. in 1946 set the pattern for many subsequent conferences in combining comprehensive survey papers by acknowledged authorities, with shorter papers on specialized subjects, many of which have subsequently come to be recognized as classics. The proceedings of this Convention are still a useful source for the radar designer.

There can be no doubt of the value and importance

of conferences of this calibre, and it is essential that they should continue to play their part in solving the problem of assimilating and putting on record the vast output of scientific and technical knowledge in the world today. But there is a serious possibility that the situation may get out of hand if too many conferences are held—perhaps from a misguided sense of prestige. Where several societies can lay some claim to an interest in a new subject it is natural that they should each want to run a conference on it. In the early stages it may be difficult to decide who is best qualified to undertake the organization in a way which will anticipate the needs of participants (who ultimately will decide the matter by giving or withholding their support). There can be no question of any form of constraint, but that is not to say that a policy of reasonable restraint on the part of executive councils would be unwelcome to potential *congressistes*.

That restraint should continue to be exercised, after a convention has been decided upon, in the admission of papers. If the time and effort of participants is not to be dissipated or diluted, any paper which serves only as a pretext for self-advertisement should be rigorously excluded. The decision should rest with referees whose authority, open-mindedness and integrity are accepted by the majority.

Having assured the quality the next step is to decide on how to handle the quantity. If this is too large the expedient of running concurrent sessions on separate subjects may not prove to be entirely effective; there are cross-linkages which cut across any attempts at simple segregation.

The obvious solution is to vary the time interval between conferences according to the rate of development of the subject. As things go this must mean more conferences—a vicious circle which can be broken only by judicious pruning of the material submitted for presentation and by the closest collaboration between organizers to ensure that there is the minimum of overlap. This might also help to thaw the cold wars between rival institutions.

We feel that the time is ripe for an International Conference on Conferences to establish a clearing house for dates and to draw up a code of practice for the benefit of inexperienced organizers. This code would no doubt make obligatory the circulation of advance proofs of all papers, or, if this proved to be impossible, the provision of a simultaneous translation system. In the absence of the printed paper the crucial point of a discourse is too easily obscured by the use of a word missing from one's vocabulary of the language; it may even be obliterated by a cough!

What Goes Wrong with TV?

SURVEY OF OVER 1,000 TELEVISION-RECEIVER REPAIRS

These articles are based on data from two different parts of the country—W. Oliver obtained his information in a coastal area where the Band-I signal is not strong and a Band-III service is only available when propagation conditions are good. The "local" transmitter has been in operation in this area for about four years. J. Elworthy, on the other hand, is a service engineer in suburban London, only a few miles away from the transmitters.

PART I—By W. OLIVER

THE survey* of faults encountered in servicing 600 radio receivers brought to light some unexpected and interesting points about radio-set failures. In view of this it was decided to carry out a similar investigation into the various faults which occur commonly in present-day television sets. The facts and figures in the radio-fault analysis were based on first-hand experience by the writer; but the present survey is in the nature of a "composite picture" covering a wider field and it is built up from material supplied by local dealers and service engineers, who went to considerable trouble to provide full and accurate details of their experiences over the past year or so. The mass of information extracted from their servicing records has been analysed and condensed into the summary of faults which follows.

The faults encountered in the servicing areas covered by this survey may not, of course, be typical of those found in other parts of the country. There seems to be a tendency for certain brands of receiver to become popular in certain districts; and each individual make may be prone to faults which are more or less peculiar to those designs. But the collection of data from several dealers should make allowance for this, and also for any element of chance or coincidence: even so, the facts which emerge from the survey are still rather remarkable and somewhat unexpected.

As so many of the components and valves in a television receiver are basically similar to, or identical with, those used in radio receivers, one might reasonably expect that the general trend of faults would also be similar. On comparing the two surveys, however, one finds that valve failures loom much larger in the field of television, while component failures seem to be noticeably fewer. When one considers the large number of small items, such as fixed resistors, potentiometers, fixed condensers, etc., which are used in a modern television set, the small number of component breakdowns which occurred in the sets under review is truly surprising. Nearly half the repairs out of a total of 500 jobs called for no component replacements whatsoever. In no fewer than 245 cases, all that was needed to restore the set to normal working order was to fit one or two new valves.

Analysis of the total new valves fitted brought to light another interesting point: most of the valve failures occurred in just a few types, which cropped up over and over again in the records of replacements.

In the 500 sets already mentioned faulty rectifiers accounted for the biggest total, with 104 in all. Of these, more than half were indirectly heated, high-voltage half-wave rectifiers—i.e., in the e.h.t. class. Of any single specialised class of valve, the type which needed most frequent replacement was the output pentode-with-triode class. No less than 80 of these valves failed, as compared with 34 triode-pentode frequency-changers and 34 r.f. pentodes.

To get a really fair idea of the relative expectation of life of these different classes of valves, however, one must take into consideration the fact that an average television receiver contains more r.f. pentodes (owing to the several i.f. stages employed in sound and vision amplifiers) than either triode-pentodes or output pentodes-with-triodes. On making due allowance for this factor, one realises that the ratio of 80 to 34 is misleading. The first figure could reasonably be multiplied by anything from three to six in order to arrive at a truer comparison on a valve-for-valve basis.

It seems as though valves of the frequency-changer class tend, on average, to have a better expectation of life in a television set than in a radio receiver, judging by a comparison between the present television survey and the radio one published previously. The 600 sets in the radio survey needed 79 replacements of frequency-changers. Allowing for the fact that there is normally only one f/c valve in the ordinary broadcast receiver; but often as many as three of this type (though admittedly used for different purposes) in the typical television receiver, the ratio is much higher than appears at first glance. One must remember, however, that the majority of the radio sets involved were considerably older than the general run of television receivers; consequently some of the radio-set frequency changers which had to be replaced had already enjoyed a very long life. On the other hand, the total of replacements was greatly swelled by casualties in portable sets, particularly those using miniature all-glass types.

Replacements of valves classed as line-timebase-output pentodes totalled 45, double triodes 21, efficiency diodes 14, video output pentodes 13, double diodes 4 and all other types, such as double-diode-triodes and a.f. output valves, together amounted to twenty. Although 50 different types of valves were needed to cope with these jobs, a bare dozen would have sufficed to meet the majority of cases, because most of the casualties occurred, as already shown, amongst a very limited selection of types.

The details already quoted were compiled from the records relating to customers' accounts and cover

* "What Goes Wrong?" By W. Oliver. *Wireless World*, Nov., 1958, p. 522.

only those valves which were actually chargeable. In addition to this total of 369 valves fitted, a further 117 valves which failed while still under guarantee were returned for free replacement, so the grand total was 486. This may sound a lot; but it averages less than one valve per job, which is not bad when one considers that there are likely to be between 15 and 20 valves in each set.


Turning now to cathode-ray tubes, 47 were replaced altogether. Nine of these had failed during their initial guarantee-period; the remaining 38 had outlived their guarantee.

So much for valves and c.r. tubes. Components and accessories provide a very different story. On the whole, the standard of reliability appeared to be quite remarkable, having regard to the large number of parts involved. For instance, in the course of 500 jobs there was not a single instance of an i.f. transformer having to be replaced. (In the radio survey the corresponding score was 4.) Only one loudspeaker gave trouble (as compared with 5 in the radio analysis) and only one valveholder had to be replaced (compared with 10 in the 600 radio sets). Other necessary replacements included 15

frame-output transformers, 5 line-output transformers, 3 sound-output transformers, 2 line-oscillator transformers, 3 "crystal" diodes, 3 thermistors, 3 faulty scan coils and 3 faulty tuning turrets. In addition, 3 booster transformers were fitted. Incidentally, a report from a dealer in another coastal area (not covered by this survey) stated that considerable trouble was caused by transformer breakdowns. Apparently the moisture-proofing of some transformers is not adequate to prevent the ingress of salt-laden air.

A total of 41 fixed capacitors had to be replaced. Two interesting points emerge on splitting up this total: there were only 10 faulty electrolytics (as compared with 63 in the radio survey!) and one solitary silvered-mica type. Possibly the greater average age of the radio sets accounted for the much larger number of new electrolytics needed.

Resistors scored the biggest total: 46 fixed resistors had to be replaced, a very similar number to those in the radio survey; and 44 variable resistors or potentiometers were needed, half of the latter being volume-controls. One of the dealers who co-operated in the present survey was particu-

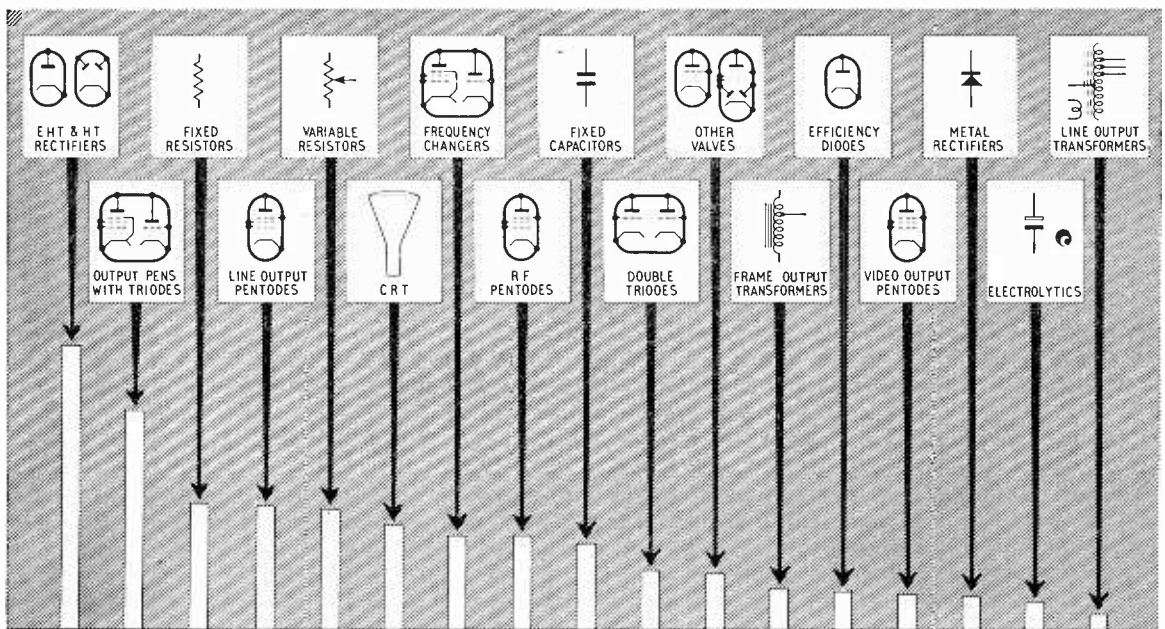

COMPONENT OR VALVE	Number Replaced	COMPONENT OR VALUE	Number Replaced
Valve h.t. and e.h.t. rectifiers	104	Line-output transformers	5
Output pentodes-with-triodes	80	Double diodes	4
Fixed resistors	46	Fuses	4
Line-timebase output pentodes	45	A.F.-output transformers	3
Variable resistors	44	"Crystal" diodes	3
Cathode-ray tubes	38	Scanning coils	3
Triode-pentode frequency changers	34	Thermistors	3
R.F. pentodes	34	Turret tuners	3
Fixed capacitors	31	Line-oscillator transformers	2
Double triodes (r.f. and general purpose)	21	Pilot lamps	2
Other valves	20	Trimmers	2
Frame-output transformers	15	Loudspeakers	1
Efficiency diodes	14	Valveholders	1
Video-output pentodes (special types)	13		
Metal rectifiers	12		
Electrolytic capacitors	10		
		Total Number of valve replacements	369
		Total number of service calls	500

larly emphatic about the amount of trouble he had experienced with volume controls. He considered them to be one of the least-reliable "fixed-in" components in a modern receiver; many of them showed signs of contact troubles almost from the start and on the whole did not compare at all well with those commonly encountered in the older types of radio set. (In some cases, noisiness was accentuated by the fact that the volume control served also as a grid leak; a slight modification of the design would have reduced this tendency.)

A few breakdowns, which should have been avoided, were caused through careless disposition of the components in the physical layout, set assemblers having moved "meltable" items (small "suspended-in-wiring" components containing thermoplastic materials such as polystyrene) into positions too close to hot-running resistors.

Among "queer" faults was a tendency for a

certain type of output valve to crack neatly and completely in a perfectly straight horizontal line around the top of the base! It looked just as though the glass "envelope" had been deliberately sliced off just above the top of the valve-base.

Wiring faults were few, but the occasional dry joint proved very troublesome and elusive when it did occur. In one set, a joint which showed signs of never having been soldered properly in the factory, but had nevertheless made contact after a fashion for three years, eventually gave trouble—and took two days' work to locate!

A dozen metal rectifiers failed, half of these being the contact-cooled type. Only 4 fuses needed renewal (after remedying the fault which caused the fuse to blow), two trimmers suffered mechanical damage and a fine-tuner developed a fault. Finally, two burned-out pilot lamps complete the list of replacements needed in the 500 jobs under review.

PART II—By J. ELWORTHY

A PAIR of date limits were set and the television receiver repairs effected during the period between them were analysed and tabulated. 557 service calls were made; but this number includes 138 calls involving only adjustments to receivers. The adjustments varied from serious misalignment of pre-set controls, through "cleaning the screen" to the resetting to lower values of mains-voltage adjustments during the winter months.

Of all the components in television receivers the triode-output-pentode valve has proved the least reliable. In the 419 repairs requiring component replacements, 82 of these valves had to be replaced. The predominant fault seems to be the development of inter-electrode leaks, which usually results in damage to the bias resistor due to an increase of cathode current. Another common fault is of heater-cathode insulation breakdown—this, too, damages the bias resistor and the valves in the upper end of the heater chain, by over-running their heaters.

In frame timebases using separate valves for the oscillator and output stages 27 valve failures occurred—21 of these were in the output stage and again inter-electrode leaks were the cause of some of the failures; but another common effect was loss of emission causing a non-linear frame scan. Oscillator valves were responsible for the other six failures.

Line-output valves (65 replaced), too, develop inter-electrode leaks which cause damage to circuit components. The more frequent offenders are the miniature types, which work at high temperatures and sometimes suffer from cracked envelopes: octal-based valves seem more reliable and very few valves of this type have needed replacement. Fifty-nine c.h.t. rectifiers failed: the usual fault was an open-circuit heater, but in some valves the whole cathode assembly had broken away from its support, causing an anode-to-cathode short. Line-timebase oscillator valves are listed separately at 54—these were mainly double triodes, and they had to be replaced because of erratic behaviour, usually when used as multivibrators in flywheel-controlled circuits. Another minor cause of erratic flywheel-timebase action was found to be the small metal rectifiers commonly used in the error detector cir-

cuits: four of these have needed replacement. Whilst on the subject of line timebases, it is worth noting that, considering the arduous conditions under which they work, efficiency diodes have a fairly good record. Only 14 required replacement in the total of 557 calls. Line-timebase output transformers were replaced in 10 cases—usually because of a breakdown of insulation between turns.

Variable resistors have a high failure rate, 65 were replaced in all, and 16 of these were faulty line or frame hold controls, which caused erratic locking of the timebase oscillators. Volume controls caused a great deal of trouble, especially when combined with a switch. Twenty-six double controls (used usually for "volume" and "brightness") were replaced, mainly because of noisy volume-control sections or faulty switches: only a few controls were replaced because the brightness section failed, and then only when this section was ganged to the switch. In contrast to "pre-set" potentiometers very few individual volume controls needed replacement; the majority of the remainder of 23 variable resistors were volume controls ganged to the mains switch; again these became noisy.

The high number of fixed resistors (62) should be regarded with caution—many resistors have been fitted to coil biscuits in turret tuners to reduce the strength of the B.B.C. signal. However, about half of the number were actual replacements—these being confined mainly to timebase circuits in applications such as cathode bias and oscillator circuits.

Forty-one replacements of the triode-high-slope-pentode type of valve used as a frequency changer were made. Although these valves are often used for functions other than frequency-changing, those replaced were, in the main, used as frequency changers; the faults making replacement necessary included erratic tuning and modulation hum on Band-III channels. The most common fault that occurred in the "cascode" type of r.f. double triode was a loss of gain; although some failures were caused by inter-electrode leaks. The total number of r.f. double triodes replaced is 24. No record was kept of mechanical adjustments to tuner units when other work was done on a receiver; but 19 calls for service were made due to erratic behaviour of the tuner alone. In most cases cleaning and lubri-

cating the contacts was all that was necessary and this often formed part of the service when the receiver was faulty in other respects.

The most-common valve in a television receiver is the high-slope r.f. pentode, as it is used in i.f.-amplifier, video-amplifier and synchronizing-separator functions in many receivers; therefore it is not surprising to find these fairly high on the list with 42 replacements. The impression gained is that very few have been replaced in functions other than as i.f. amplifiers; but most receivers have only one video amplifier and one sync. separator compared with four or five i.f. stages.

Faulty paper capacitors numbered 23—usually a leak or short circuit necessitated replacement; but some open-circuited units were found. Open circuits were the rule rather than the exception with electrolytic capacitors. The usual symptom was, of course, hum; but other effects included poor frame linearity and instability. In all, 18 units were replaced. Slightly more reliable than both paper and electrolytic capacitors were the small mica and ceramic types—a total of 14 of these needed replacement.


Eighteen "metal" h.t. rectifiers had to be replaced. The directly-air-cooled type failed catastrophically, leaving behind the characteristic and most-unpleasant smell of burned selenium. Contact-cooled types seem not to die, but fade away, gradually reducing h.t. voltages and picture size.

Seventeen h.t. rectifiers failed: faults included "flash over" (which blew the h.t. fuse) and the normal end-of-life loss of emission. Only three valves suffered open-circuit heaters, and one of these was in a series-connected heater circuit.

The figure for c.r. tube replacements (18) would be higher were it not for the preference of many people to buy a new set when the tube in an old receiver fails: a common tube fault was an internal short-circuit of part of the tube heater, which, in a series-heater chain, results in a drop in cathode temperature and emission. Grid-to-cathode shorts, resulting in uncontrollable brilliance, and low emission are two more common faults.

Aerials: in this group, responsible for 15 calls, Band-III additions to existing Band-I aerials are included. Often when an old set is replaced by a new one, a satisfactory picture is received on the existing aerial for the B.B.C. channel, and the customer is reluctant to pay for an additional Band-III aerial. However, as the receiver ages the noise level on the I.T.A. picture rises, and a separate Band-III aerial is then the cheapest and most long-lasting remedy.

The remaining faults form a very small part of the total—5 small diode valves and three mains droppers indicate that these components are not particularly troublesome and the total of 13 miscellaneous individual failures includes line- and frame-oscillator transformers.

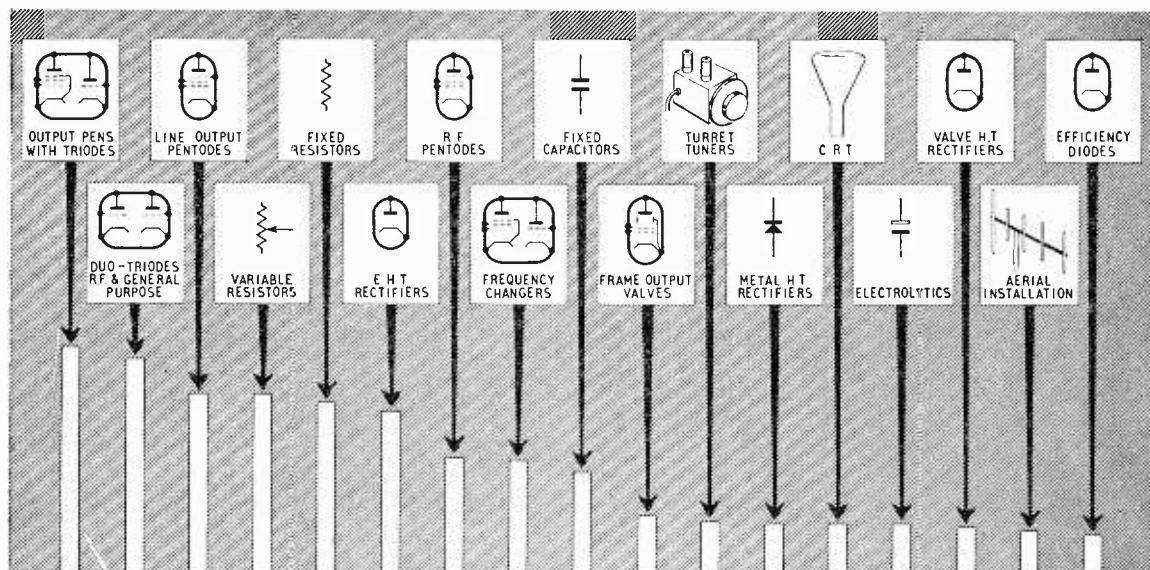

COMPONENT OR VALVE	Number Replaced	COMPONENT OR VALVE	Number Replaced
Output pentodes-with-triodes	82	Cathode-ray tubes	18
Double triodes (r.f. and general purpose)... ..	78	Electrolytic capacitors	18
Line-timebase-output valves	65	Valve h.t. rectifiers	17
Variable resistors	65	Aerials	15
Fixed resistors	62	Efficiency diodes	14
Valve e.h.t. rectifiers	59	Line-output transformers	10
R. F. pentodes	42	Small valve diodes	5
Triode-pentode frequency changers	41	Mains-dropping resistors	3
Fixed capacitors	37		
Individual frame-timebase-output valves	21		
Mechanical attention to turret tuners	19		
Metal h.t. rectifiers	18		
		Total number of valve replacements	424
		Total number of service calls	557



Outside the Physikalisches Institut, Stuttgart. Much of the value of the Congress was the opportunity afforded for informal discussion.

International Congress on Acoustics

TOPICS DISCUSSED AT THIS YEAR'S MEETING IN STUTTART

SINCE this series of conferences was initiated in Delft in 1953 by the International Commission on Acoustics (under the auspices of U.N.E.S.C.O.) there has been a phenomenal increase of activity and considerable widening of the scope of the subject. At Delft the number of papers read (in three concurrent sessions) totalled 90; at Cambridge, Mass. in 1956 the number was 260; at Stuttgart this year there were no fewer than 350 discourses by authors from 26 countries. Fourteen invited papers by acknowledged authorities were given in the mornings in the large lecture theatre of the Physikalisches Institut and were open to as many of the 1,200 members attending the Congress as could find seats. The remainder of the contributed papers (in German, English, French or Italian) were given in the afternoons, either at the Physikalisches Institut, or, a short bus ride away, at the Technical High School. No advance copies of papers were available and authors were restricted to a 15-minute talk, followed by 5 minutes of discussion. To get through the work in eight days (1st to 8th September) it became necessary to run eight sessions concurrently, and while this to some extent solved the problem for the narrow specialist it increased the difficulties of those charged with the responsibility of viewing the subject as a whole. The following notes are of necessity somewhat selective and arbitrary but they will have served their purpose if they indicate the direction in which inquiry is proceeding and some of the results so far obtained. The full proceedings will be published in the spring (by Elsevier) and will be available to non-participants as well as members of the Congress.

Electroacoustics: Transducers

Investigations by G. E. Martin (U.S.A.) into the relative merits of commercially available magnetic materials for use in electromagnetic (variable reluctance) transducers have led him to the conclusion that grain-oriented silicon steel best meets the criteria of bandwidth, power output and efficiency. Work is proceeding on new materials with a view to bettering this performance.

Playback heads for magnetic tape, using the Hall effect were discussed by F. Kuhrt (Germany). The output does not depend on rate of change of flux and so differs from inductive heads in being independent of frequency. In practice a wafer of indium-antimonide, at right angles to the tape, is sandwiched between two ferrite blocks which come together at the bottom to form the usual working gap in contact with the tape. The magnetic flux is thus made to traverse the thickness of the wafer. A polarizing current is passed along its length and the output e.m.f., which may be as much as $500\mu\text{V}$, appears at right angles to this current.

A paper by J. Greiner (Germany) on the hum pick-up in magnetic tape recorders underlined the importance of ensuring that any residual field is parallel rather than at right angles to the plane passing through the front and back gaps of the recording heads. He compared the plotted random field on the surface of an early tape deck design with the uni-directional field in a more recent product.

No fundamentally new principle appeared in the loudspeakers discussed at the Congress, but an interesting modern version of the Beyer dynamic principle using a lightweight conductor grid on a light plastic diaphragm and a ferrite magnet system was described by M. R. Gamzon (Israel).

Monitoring loudspeakers with special directional characteristics to localize the sound in mobile TV control vans were described by D. E. L. Shorter (England) who also showed how small line-source loudspeakers and monitor screens are used to maintain contact between singer, orchestra and conductor on large studio sets. By mounting two small unbaffled loudspeakers close together on the same axis and feeding them in opposite phase a figure-of-eight directivity is obtained. If the input bandwidth is restricted to two octaves this loudspeaker can be mounted on top of the studio microphone and used for conducting interviews between people in widely separated studios.

Acoustic feedback in sound reinforcement (public address) systems is reduced by inserting a constant frequency shift between microphone and loudspeaker in

a system described by M. R. Schroeder (U.S.A.). This is accomplished by modulating a 20kc/s carrier and then extracting one sideband after beating with a second oscillator. If the shift is made equal to the mean distance between peaks and troughs in the gain-frequency response of the room energy built up in the peaks is absorbed in the troughs after one circuit round the loop and about 10dB more gain can be used before instability is reached. In a demonstration tape recording using a 5-c/s shift the beat between original and reinforced sound could be just heard (after it was pointed out) but was insufficient to interfere with speech.

Delay lines for low frequencies in the form of twisted tape, under tension- and stiffness-controlled conditions, were discussed by G. Ashley and R. M. Lerner (U.S.A.). These have distortionless characteristics and propagation velocities as low as 0.01 of the shear velocity in an unbounded medium. A composite magnetostrictive delay line technique described by J. F. W. Bell has been used to determine the elastic constants of a wide variety of solids, e.g. graphite, alumina, fused quartz and metals at temperatures up to 1000°C.

Electromechanical filters using thick circular discs coupled by thin rods and driven by magnetostrictive transducers were discussed by R. L. Sharma (U.S.A.). With centre frequencies of 50kc/s to 500kc/s, these filters find application in high-performance communications receivers, single-sideband and carrier equipment. W. P. Mason and R. N. Thurston (U.S.A.) described bandpass filters for frequencies below 20kc/s which are milled or pressed from sheet metal and consist of parallel bars joined at their centres by short torsional elements. The pass-band is associated with anti-symmetric flexural vibration of the bars.

Piezoelectric transducers in the form of paste in a high-viscosity medium have been used by A. Lutsch (South Africa) for application *in situ* to specimens for non-destructive testing and the determination of elastic constants. Cylindrical transducers radiating along the major axis were discussed by A. A. Ananjeva (U.S.S.R.). They depend upon periodic distribution along the cylinder of velocities normal to the surface to give a principal lobe of directivity at grazing angles to the surface. Coaxially mounted piezoelectric cylinders acting as capacitors in a low-pass artificial line and described by W. J. Trott (U.S.A.) generate a progressively increasing wave in the water within the tube. At a given frequency there is an optimum length at which the electrical and acoustical phase velocities are equal; at this point no electrical energy remains. High efficiency, low Q and constant impedance are claimed for this design.

Spark discharge generators of underwater sound with efficiencies of 30% were described by N. A. Roy and D. P. Frolov (U.S.S.R.). For the generation of **micro-second sound pulses** at pressures up to 100 atmospheres W. Eisenmenger (Germany) uses eddy current reaction in a copper foil induced by capacitor discharge through an adjacent spiral coil. Rise times of less than 10^{-7} sec in the shock-wave front have been observed.

Room Acoustics : Musical Acoustics

The majority of the papers on room acoustics dealt with absorbers for amelioration of reverberation characteristics. C. L. S. Gilford and N. C. H. Druce (England) described wide-band absorbers consisting of thin layers of porous material with impermeable facings in which a high coefficient of absorption is maintained up to the natural resonance of the system, which occurs at a high frequency. Investigations of rockwool absorbers by W. Löchstätter (Norway) have revealed deep and narrow absorption maxima in the region of 100c/s which have been shown to be due to vibrations of the fibres themselves.

Model concert halls have often been used for the inves-

tigation of their acoustic properties, sometimes with light rays to reveal reflections, but a much more ambitious scheme using **stereophonic ultrasonics** was described by R. Boutros-Attia (Egypt). A stereo tape recording is made at normal speed, played back at increased speed through ultrasonic transducers in the model, picked up by microphones in an artificial head inside the model, and again recorded and finally played back at slow speed and compared with the original sound. Drying apparatus is used to reduce the relative humidity inside the model.

A. F. B. Nickson and R. W. Muncey (Australia) expressed the opinion that measurements obtained from models were insufficient for predicting the acceptability of designs. The response of individuals to tests with artificially added echoes has shown broad tolerance of acoustic conditions. It is suggested that the detail supplied by acoustical measurements is not matched by a corresponding subjective response. On the other hand V. L. Jordan (Denmark) gave the results of subjective tests which showed that orchestral players' judgment of concert hall quality is related to the amount of first reflections received by the orchestra. Studies by M. Lukacs (Hungary) have shown a relationship between reverberation (1.5 to 2.5 sec) and the musical tempo preferred by 60 persons in 480 musical judgments. As might be expected the longer the reverberation time, the slower the preferred tempo. The programming of a digital computer for the generation of conventional and new music was demonstrated by M. V. Mathews and N. Guttman (U.S.A.).

Physiological and Psychological Acoustics

Although the mechanism of hearing as far as the output from the cochlea is concerned is now reasonably well understood, the processes of the central nervous system and the mechanism of perception still await a satisfactory explanation. A. von Muralt (Switzerland), in a lecture of exemplary clarity outlining present knowledge of the physical chemistry of nerve pulse generation and the important role of sodium and potassium, said that little was yet known of the causes of the catastrophic increase of permeability of the nerve cell wall by sodium which was the origin of the electrical "firing" pulse. In an endeavour to find more about the nerve processes and the relationship between stimulus and sensation, G. von Békésy (U.S.A.) reported experiments on the distribution of sensitivity with frequency of stimulus along the human forearm which has features in some ways similar to those of the basilar membrane and cochlea. S. S. Stevens (U.S.A.) in a paper read for him by J. C. R. Licklider proposed modifications of the Fechner law relating stimulus and sensation and adduced evidence in support from a comparison of the exponents of the power functions relating psychological magnitude to stimulus magnitude for such widely differing "prothetic continua" as loudness, brightness, smell, taste, temperature, vibration, heaviness, force of hand-grip, vocal effort and electric shock.

The masking of one sound by another has in the past been the subject of a vast number of experiments involving simultaneous masking and "residual" masking when the masked signal is delivered after the masking tone has been cut off. I. K. Samoilova (U.S.S.R.) pointed out that masking can still take place when the masked signal *precedes* the masking signal and is separated from it by a certain interval of time.

Noise

The social problem of increasing noise, as part of the price to be paid for the advance of technology, was admirably presented in an exhibition "Weniger Lärm" ("Less Noise"), arranged by the Industrial Central Office of the province of Baden-Württemberg. This was a comprehensive collection of typical noise sources—motorcycles, circular saws, teleprinters, etc., and of the

means that have been successfully adopted in either reducing the source or screening the output of noise. There can be little doubt that noise reduction is being more actively pursued in Germany than in most countries, and during a scientific excursion to Munich, members of the Congress were able to appreciate the success of the efforts which have been made by the German railways to reduce wheel noise by the use of bonded rubber layers between tyre and wheel boss, aerodynamic noise by streamlining and double windows (fixed) with air conditioning. These and other methods account for the phenomenal quietness of, for example, the Trans Europa Express diesel trains.

Studies of aviation acoustics are being urgently pursued, not only in the interest of people in the vicinity of aerodromes, but because at speeds approaching that of sound the energy radiated from aerodynamic turbulence may exceed the jet noise and may even induce serious vibration of the airframe. It was pointed out by H. E. von Gierke (U.S.A.) that the noise from wake vortices increases as the 6th power of the speed, as does jet noise with the exit velocity. An interesting feature of jet noise is that there is no acoustic radiation from the supersonic speed region close to the nozzle and that most of the sound energy comes from a region from 30 to 40 nozzle diameters further downstream. The frequency of maximum spectral energy in the noise increases as the nozzle diameter is reduced and this fact is exploited in so-called jet silencers with perforated walls. As von Gierke pointed out they are not silencers but noise sources from which the energy is emitted at supersonic frequencies rather than audible frequencies. The energy is consequently more rapidly dissipated in propagation through the atmosphere. The difficulties of relating turbulence in a moving jet stream to sound at a fixed distant point were underlined by E. J. Richards (England) who described the use of space-time correlation techniques in conjunction with hot-wire microphones in the region of maximum shear at the jet boundary.

Less virulent noise sources, such as piston engine test beds, car tyres and typewriters, which formed the subject of other papers may be said to have descended the loudness scale to the point where restrictive legislation is feasible, and it was interesting to learn from a paper contributed by R. Levi *et al.* (Brazil), that protection against noises from "vehicles, machinery, motors, compressors, stationary generators, loudspeakers, radios, orchestras, apparatus of all kinds and industrial establishments" is now provided for the citizens of Sao Paulo by a law passed in 1958. The maximum permissible levels are between 85 and 45dB, depending on whether the zone is wholly industrial or residential. In Russia, according to a paper by I. I. Slavin and J. M. Ijaschtschuk three classes of noise spectra are recognized (low, middle and high frequency) each with a permissible upper limit of intensity. In many other countries such criteria are regarded as an oversimplification, and debate and research continue in an effort to find a valid, or at any rate a reasonable, correlation between objective measurements and subjective nuisance.

Molecular Acoustics

One of the most spectacular advances in "acoustics" has been the progressive lifting of the upper limit of frequency of mechanical vibration first into the Mc/s and now into the kMc/s region. The absorption of ultrasonic and what is now coming to be termed "hypersonic" vibration in gases, liquids and solids is providing very valuable information on the structure of matter to supplement that already obtained from X-rays and infra-red radiation. From the frequency and shape of absorption lines and bands and their associated relaxation times many clues are provided of the transitions of atomic order in complex organic molecules. J. Lamb (England) and his colleagues at Imperial College contributed several papers describing amongst other things investigations into lubricating oils and substituted

ethanes. An invited paper by H. Oberst (Germany) showed the extent to which acoustical methods are employed in plastics research, development and testing. They are also providing new light on dilute electrolytic solutions (A. Barone and D. Sette, Italy) and steam at high pressures and temperatures (R. B. Lindsay *et al.*, U.S.A.).

To those unacquainted with the rapid advance in this field the idea of molecular acoustics may have sounded a little far-fetched; no doubt they will regard the terms **atomic and electronic acoustics** as wholly fantastic, but those who were privileged to hear the lecture by R. W. Morse (U.S.A.) on ultrasonics in metals at very low temperatures can have little doubt of their validity. At temperatures at which the mean free path of electrons in the crystal lattice of pure metals is of the same order as the ultrasonic wavelength there is absorption due to scattering of energy by electrons in the direction of propagation of the acoustic field. The electron movement is equivalent to an elliptical orbit and the attenuation of the acoustic energy is modified. By rotating the magnetic field relative to the sound field the shape of the Fermi surface (bounding the occupied electron states) relative to the crystal axes has been deduced and has been found in the case of copper to be not spherical but of approximately cubic form with rounded corners. Investigations of the electron structure of tin have revealed a sharp fall in "sound" absorption at the transition temperature. Exploration by the above-mentioned magneto-acoustic technique has shown that the superconductivity is anisotropic.

Miscellaneous

Many interesting and unusual applications of acoustics, which do not fall easily into any of the broad divisions so far discussed, were the subject of individual contributions and are worth mentioning to show the range and variety of the subject.

The new **vehicle tunnels** which are now a feature of many Continental cities pose special problems of noise control, which were discussed in papers by O. J. van Os and P. A. de Lange (Holland) and A. C. Raes (Belgium).

Motor horns are intended primarily for giving audible warning of approach to pedestrians, but are equally important in "communicating" with other motorists. T. Lange (Germany) discussed the results of tests to determine the best frequency spectrum for penetrating wind noise.

Wind speeds can be measured over a base line of 2.5cm by an **acoustic micromanometer** described by A. S. Gurvitch (U.S.S.R.). The phase change of ultrasonic sound gives a measure of the velocity of the medium.

Better combustion and a higher temperature in oil-fired furnaces is possible according to P. Greguss (Hungary) if an acoustic field is maintained in the region of the flame.

Acoustic drying of porous sheet materials offers advantages in some industrial processes, and R. M. G. Boucher (U.S.A.) reviewed the present state of the art. Minimum intensities of 145dB at 6 to 10kc/s are necessary and at present the method is effective for thicknesses of 2in or less.

Looking to the future, I. Dyer (U.S.A.) discussed the noise environment to be expected in space vehicles.

If progress continues at this pace the 4th Congress, which is to be held in 1962 in Copenhagen under the chairmanship of Prof. Dr. F. Ingerslev, will have a formidable task in keeping the subject matter within the bounds of a single conference—even perhaps of finding accommodation for the increasing number of scientists who are now paying court to Acoustics—the one-time Cinderella of the sciences.

Airshow Electronics


Review of Trends, Progress and Equipment at the S.B.A.C. Exhibition, Farnborough

IN the "static" exhibition it was the exception, rather than the rule, to find a stand without some form of electronics on show. This is, perhaps, not surprising when one considers that at least 20% of the cost of a modern airliner is its electronics and that a V-bomber may contain as much as half-a-million pounds worth of radar, wireless and control equipment.


Automatic Control: Modern flying conditions, both as regards speed and traffic density, make great demands on the personnel involved. Thus it is logical that equipment, whether it be for the use of the air traffic controller or the pilot, should perform automatically many of the functions previously carried out mentally and manually. The last few years have seen great progress in data handling and processing techniques on the ground. This year the main emphasis at the show was on the use of automatic control in the air, so that the pilot does not need, except in an emergency, to fly the aircraft; instead he supervises the operation of the automatic equipment. Of course, "auto pilots" have been with us for many years now; but these, hitherto, have acted in such a way that they preserve, so to speak, the *status quo* of the aircraft with regard to compass heading, height and airspeed. The latest techniques, however, enable absolute information from radio-navigational aids to be fed to the auto pilot.

Especially suitable for deriving this information is Doppler radar, and Marconi have produced two displays incorporating computers for their AD2300 equipment. The smaller of the two (Model B) features distance to go along track and distance to go across track; but the more sophisticated Model C gives latitude and longitude and magnetic variation, which is derived from a three-dimensional cam actuated by the aircraft's position! Both these computers are electromechanical analogue devices which give auto pilot feeds; but the nature of Doppler information—an a.f. tone representing the spectrum centre—makes possible the use of digital techniques on a pulse-counting basis, and this is what Canadian Marconi do in their CMA-601 computer for the CMA-620 series of radar (Janus f.m./c.w. system). Transistor-diode "logic" circuits are used to produce along-track and cross-track distances to go. The control unit is, in part, duplicated (within the one box) so that the next flight leg may be pre-set and at the completion of one flight leg an automatic change-over to the next leg occurs. An interesting feature of the CMA-620 series is that the whole system is self-checking. This is done by periodically and automatically perturbing the tracker unit, and seeing that it returns to the original "lock" condition so that a fault indication is given within 20 seconds or so of the occurrence of the fault. Manual-check facilities similar to those found on ground equipment are given by a meter and rotary switch on the front panel of the tracker unit.

Of course, automatic aircraft guidance is not confined to Doppler radar. Cossor have extended the usefulness of their GEE system by adding a computer. An experimental equipment was shown, in which the c.r.t. indicator had been retained—a fix is made in the normal way, then the circuits are switched in: these operate the computer with a following accuracy of 1/100 of a GEE unit. It is worth mentioning, in passing, other improvements on the GEE r.f. head. A cascade input stage and double-triode oscillator and mixer have enabled noise factors of 1.5dB at 30Mc/s and 2.25dB at 80Mc/s to be realized. This, Cossor say, results in the coverage previously given at 40,000ft now applying at 100ft!

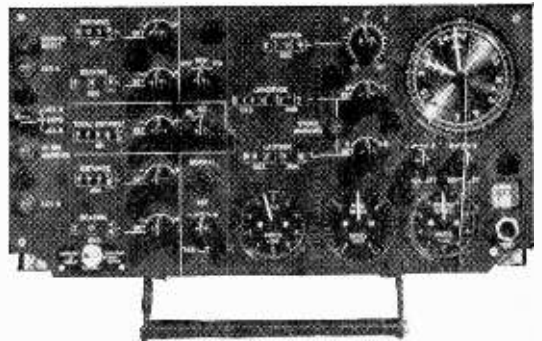

Type 4382 computer and display for Marconi AD2300 Doppler radar. Magnetic variation is given top-centre dial.

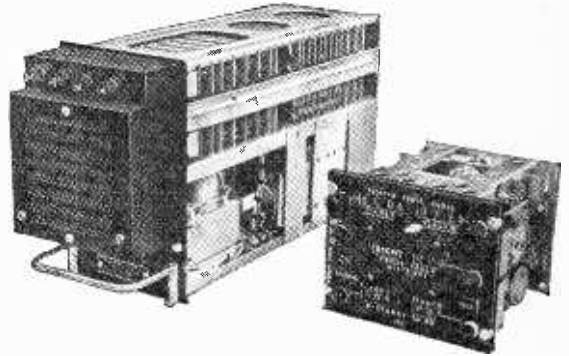

Digital computer, and control and read-out unit for Canadian Marconi Doppler radar.

When using any of the systems noted above with the auto pilot a considerable relief is afforded to the pilot. However, Sperry, carrying the idea yet further, were illustrating the use of a computer to fly the aircraft without external intervention from take-off to landing. Sperry's system, called Radio Track Guide, is aimed, like Cossor's, at exploiting fully the information given by ground-based aids and it is designed to work with practically any such system. This uses an electro-mechanical computer in which the distances travelled across and along track are represented by angular displacements of two centre-tapped potentiometers. At the start of a flight leg (which, incidentally, is "stored" on a punched card) the potentiometer slides are at the earthed centre taps, so their relative potential is zero. They are then displaced by an amount representing the leg, and the inputs to the potentiometer are adjusted until the relative potential is again zero. Thus, during a flight leg the sliders move from the centre taps to the end-of-leg points, and, provided the aircraft is on track, the slider-to-slider potential is always zero. To avoid the carrying of two sets of potentiometers to allow legs to be flown automatically and consecutively the navigational information is deliberately falsified at the end of a leg so that the computer is "held" at the change over point. As soon as the setting-up procedure has finished the deliberately induced "error" is removed and normal tracking continues.

For the landing of the aircraft we now turn to Automatic Blind Landing equipment* developed by B.L.E.U., R.A.E. Bedford on show under the name "Autoland". The equipment consists of an auto pilot (Smiths), a high-accuracy altimeter† (S.T.C.) and a leader-cable installation (Murphy). However, the leader-cable installation itself is inconvenient, as it requires a run of about a mile from the end of the runway. Similarly a phase of "inertial guidance" (constant altitude) has to be employed between the end of accurate I.L.S. guidance (to I.C.A.O. specification) and the start of the altimeter control of height, because the altimeter has to be over level ground for use at low heights. In its present form the equipment uses the I.L.S. glide path guidance down to 150ft. not only to place it in the correct position for entry to "Autoland" control, but also to stabilize the auto pilot for the constant-altitude phase. Thus, although I.L.S. is not a part of the system, Autoland does rely on I.L.S. for part of the final landing procedure. For this reason, then, and in the hope that I.L.S. may eventually prove reliable enough guidance for part of the landing cycle (so reducing the length of the leader-cable), both Pye and S.T.C. have been working to improve the I.L.S. ground equipment. The Pye development consists of the use of slotted-cavity radiators instead of dipoles for the glide-path aerials—these, with their reduced subsidiary lobes and narrower beamwidth, render the glide-path usable down to about 20ft. on a good installation. S.T.C. on the other hand have been attending to the localizer or azimuth aerial. Their STAN 7 set of equipment uses twelve dipoles in front of a straight curtain reflector (Pye use two dipoles and a parabolic reflector). To suppress any false signals from the localizer array, mounted behind it is another array which provides a blanking signal outside the localizer main beam. The S.T.C. equipment makes extensive use of transistors, and one complete localizer and glide path (STAN 8) equipment contains only 28 valves. Automatic monitoring is fitted to both S.T.C. and Pye equipments.


Electronic automatic control is also finding increasing application to fuel control in turbines. The de Havilland Gnome engine which will be used first in helicopters, where the requirement of sudden and frequent power changes is made, together with a constant speed of rotation for the rotor. Using manual control of the engine, flight controls and fuel throttle have to be adjusted simultaneously and correctly if dangerous engine conditions are to be avoided. Mechanical linkages have been used, but these have disadvantages. The Gnome engine-fuel-control system (developed by de Havilland Propellers) uses a small computer which integrates signals feed back from the engine with the pilot's demands to control the fuel supply to the engine. It operates from the 24-V aircraft supply, using transistors and magnetic amplifiers: it ensures that optimum working is achieved under any circumstances and dangerous engine conditions cannot occur.

"Building-block" construction, in which a selection of compatible units to make an equipment exactly to the user's specification without expensive one-off techniques, provides great flexibility and is an increasing trend in ground equipment. It is this which makes a full description of the Redifon G420 series of transmitters impracticable in this report. Covering 1.5 to 30Mc/s this equipment can be used as an a.m./c.w. transmitter of 500W output and, by the addition of other units, be made to encompass the gamut of modulation classifications as an 8-frequency remote-controlled station, with effective powers up to 2kW under some conditions.



We noted last year the debut of the Cossor CRD.23 processed radar display system. This equipment, too, is arranged on the building-block scheme so that practically any requirement of synthetic and live radar information can be handled. It has, too, several very interesting technical details. Primarily designed for

civil use, the number display is rate-aided, and the numbers are generated, as is usual, during inter-scan time; but this period is very much shorter than with some systems, so that the maximum p.r.f. is limited more by maximum range than inter-scan time. The system is completely direct-coupled, the range-scale being set by the level of feedback on the scan amplifiers. It is thus possible to off-centre the display and then switch to a shorter maximum range, when the part of the display in view expands; but is not further off-

Burndept lightweight v.h.f. transceiver. Crystals are housed beneath swing-out cover. Tuning indicator checks power amplifier adjustment.

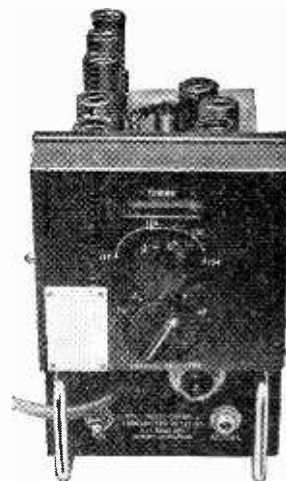

Left: Five-loudspeaker column for Trixadio aircraft p.a. system. Note built-in transistor amplifier with preset level control (at bottom).

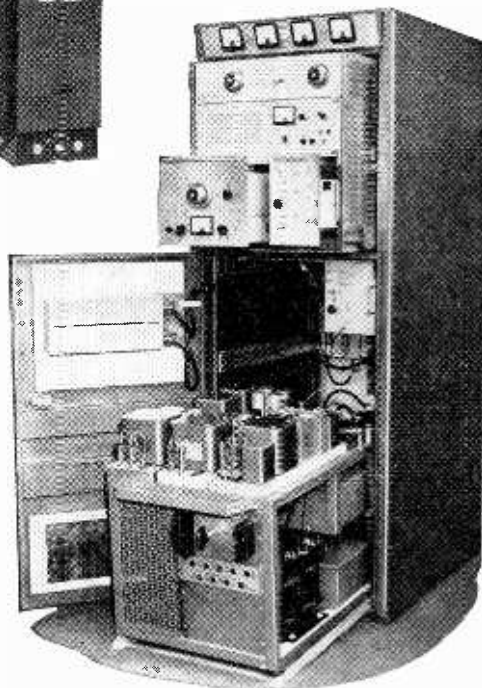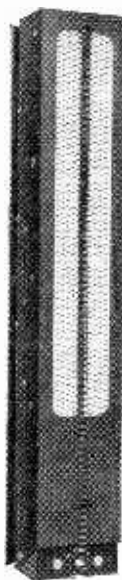


Building block construction of Redifon GA20 series h.f. transmitters. This example is fitted with units for s.s./i.s.f. operation.


* *Wireless World* Vol. 64, p. 579 (December 1958).

† *Wireless World* Vol. 64, p. 492 (October 1958).

Right: Horse-collar construction of de Havilland Propellers' computer (for control of Gnome engine) enables it to fit in engine air intake, for cooling.

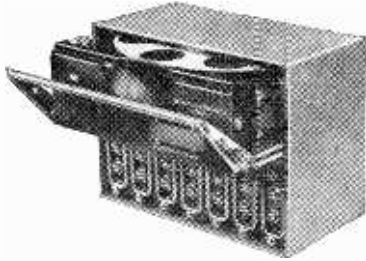

Left: "Midas" cassette - loading flight-data recorder. Spools are placed one above the other in pull-out unit.

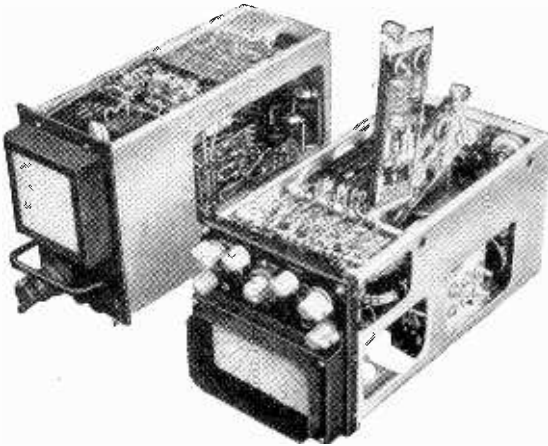

Two units from Ekco E190 airborne radar. Transmitter (left) and display unit (right) with i.f. amplifier, control unit and timebase. Note servicing accessibility given by hinged panels.

centred. No pre-pulse is required, thus triggering from the transmitter pulse can be carried out, so avoiding any chance of jitter due to inaccuracies in the "firing" of the transmitter chain. The secret to all this lies in the deflector-coils, which, although they are of high impedance, have an extremely small self-capacity so that the inevitable ringing on shock excitation is at a high frequency and so dies down very quickly. The whole equipment is "electronic" in its approach—even the rate-aided number shifts are generated with an electrometer valve, and only 12 valve types are used in the whole equipment. Another Corsor Radar, the CR.787, uses a travelling-wave tube as an r.f. amplifier, resulting in a noise factor of 6dB and a 23% increase in range.

Weight reduction greater than the weight of the original equipment consequent on miniaturization sounds ridiculous, but it is true. The new Ekco E190 airborne radar itself weighs only 86lbs. against the 125lbs. of the E160, but the E190 uses only three units

—scanner, display and transmitter—against the six boxes of the E160. Thus cabling and racking are saved and their weight amounts to a total slightly greater than the weight of the E160. This new radar operates on 3cm and has a range of 150 miles! It is almost completely transistorized, and to make possible the economic use of transistors a 13.5-Mc/s i.f. has been used. This leads to a tendency of the klystron a.f.c. circuit to lock on to the image response, but some very ingenious circuitry avoids this difficulty. Whether the klystron reflector voltage rises or falls when the a.f.c. is "searching" depends on a bi-stable transistor switch which is sensitive to the direction of change of voltage of discriminator-output waveform. There are, naturally, two discriminator characteristics "displayed," as the klystron frequency is changed, one being the "mirror image" of the other. If the image response is approached, then the switch reverses the direction of the change of voltage on the klystron reflector so that its output frequency is swept away from the image and back to the correct value. To avoid "hunting" the bi-stable switch can operate only when the klystron reflector voltage is falling. Total power consumption is 300VA and a Polaroid filter is used on the c.r.t.

Aircraft p.a. exhibited a trend towards distribution at low level, using loudspeaker units with integral transistor amplifiers. In this way reliability is increased and weight is saved. Both Elliott and Trix were showing examples—the Trix system uses a small column of five loudspeakers. Whilst the directional effects achieved with only five units might be expected to be small, adequate coverage of a typical aircraft is achieved with three or four columns.

Magnetic Recording.—Several firms were showing magnetic recording apparatus—notably Grundy, Thermionic, Royston and Solartron. The Thermionic Products equipment is a ground-based 20-channel unit designed for registering aircraft communications. It is completely transistorized, but, as there is no "erase" facility, the power requirements for bias are fairly small. The system, like the previous Thermionic and B.C.C. recorders, is self-checking and automatically changes over to another equipment should a fault develop. The Royston "Midas" is an airborne, 8-channel data recorder with a tape-magazine which can be ejected from the aircraft in event of a crash, so preserving the records. Tape speed is 1/10 in/sec and up to 300 signals representing aircraft performance can be recorded by using the built-in time-sharing switch. This recorder, too, uses transistors throughout.

R/T equipment for aircraft service is naturally in the same position as mobile ground equipment; put simply, the trouble is not enough channels. This has led to some exploration of the u.h.f. bands, but a temporary amelioration of the position on v.h.f. is offered by reducing channel spacing. This, of course, renders existing equipment unsatisfactory, so it was interesting to see many manufacturers producing 50kc/s channel-width versions of their 100kc/s v.h.f. equipment. Universally the modifications required include extra crystal ovens to improve stability. Changes of i.f. amplifier strips are fairly common and, last but not least, on the equipments giving all channels, room for double the number of crystals has had to be found. In most cases, though, the external appearance and ease of control of the set have not been changed. A new v.h.f. transceiver from Burndept—the BE255—is designed for light aircraft. Weighing only 6½lbs. complete, it provides five preset channels and uses a transistor power supply. The sensitivity is 10 μ V for 10dB signal-to-noise ratio and the transmitter output is 1W.

W.S. Electronics were showing an airfield communication system: usually one v.h.f. channel is set for essential services, but the nature of the equipment used generally restricts this to communication with motor vehicles. The W.S. system uses an inductive loop motor system for contacting small "walkie-talkie" receivers, and communication back to the base station is made on u.h.f.

WORLD OF WIRELESS

International Study Groups

THE work of the C.C.I.R. (International Radio Consultative Committee), which is one of the permanent organs of the International Telecommunication Union, is continued between international plenary meetings by a number of study groups each covering a specific aspect of the Committee's work.

Two of these study groups, No. IV (concerned with ground-wave propagation) and No. V (covering tropospheric propagation), have now been merged because of the "difficulty of distinguishing the frontier between the fields of study of these two groups." The chairman of the combined group, which is known as study group V, is Dr. R. L. Smith-Rose. A new study group IV has been set up to deal with radio links between earth and space vehicles and between space vehicles themselves. The chairman is Professor I. Ranzi of Italy.

To facilitate the work of the various study groups, of which there are fourteen, member countries of the C.C.I.R. set up *national* counterparts of each of them. Below we list the chairmen of the study groups in this country.

I Transmitters	R. Holden (G.P.O.)
II Receivers	W. R. H. Lowry (G.P.O.)
III Complete systems	R. Holden (G.P.O.)
IV Groundwave and tropospheric propagation	Dr. R. L. Smith-Rose (D.S.I.R.)
V Space vehicles	Dr. J. A. Saxton (D.S.I.R.)
VI Ionosphere propagation	G. Millington (Marconi)
VII Time signals and standard frequencies	R. L. Cooke (G.P.O.)
VIII Monitoring	C. W. Sowton (G.P.O.)
IX General technical questions	W. J. Bray (G.P.O.)
X Broadcasting	W. J. Chalk (B.B.C.)
XI Television	Capt. C. F. Booth (G.P.O.)
XII Tropical broadcasting	J. K. S. Jowett (G.P.O.)
XIII Operation questions	G. H. M. Gleadle (G.P.O.)
XIV Vocabulary	A. K. Dobbie (G.P.O.)

Radio Hobbies Show

A FEATURE of the Radio Hobbies Exhibition, which opens at the Royal Horticultural Society's Old Hall, London, S.W.1, on November 25th, will be a display of over a dozen working communications receivers. These sets, which may be operated by visitors, will be supplied by Airmec, Collins, Eddystone, Geloso, Hallicrafter, Heath-Kit, G.E.C., Marconi, Minimitter, National, Racal, Redifon and Siemens-Ediswan.

Admission to the exhibition, which will be open from 11 to 9 on each of the four days, cost 2s. The exhibitors include:—

A.P.T. Electronics
Avo
British Amateur TV Club
Collins Radio Co.
Daystrom
Electronic & Radio Engineer
Enthoven Solders
Hi-Fi Magazine
Home Radio
Jason Motor & Electronic Co.
K.W. Electronics
Labgear
Mayra Electronics
Minimitter
Mullard

Norman Price
Richard Maurice Equipment Co.
Reida Radio
Short Wave Magazine
Siemens Edison Swan
Taylor Electrical Instruments
Territorial Army
R.A.F.
R.S.G.B.
Radio Constructor
Royal Navy
Scott, James & Co.
U.H.F. Group
Wireless World

T. E. Goldup

WITH the death of Thomas Edward Goldup, C.B.E., on October 6th, at the age of 65, a very well-known figure has been lost to the radio industry and will be especially missed in councils and conferences where radio men meet.

His industrial career had been spent entirely with the Mullard organization which he joined in 1923. He had been a director for over 20 years. His early years with the company were spent at the valve factory at Balham where he later assisted in the setting-up of the Valve Development Laboratory. Reference was made to "his pioneering achievements in the design and development of thermionic tubes and his contributions to the technical and administrative councils of the radio industry" when in 1954 he was elected a Fellow of the American Institute of Radio Engineers.

During the First World War he was in signals in the Royal Navy and on demobilization was appointed senior experimental officer at the Signals School, Portsmouth.

Mr. Goldup's absorbing personal interest in later years was in the educational field. He was a governor of the Ministry of Supply School of Electronics, Malvern, and was on the boards or advisory bodies of a number of educational organizations. He was also a moving spirit in the Mullard Educational Service.

During his tenure of office as president of the I.E.E. (1957/58) he undertook an extensive overseas tour during which he took part in the Commonwealth Engineering Conference in Australia.

Other Obituary Notices are on p. 435.

Commonwealth Telephone Cable

CABLE AND WIRELESS LIMITED have been made responsible for financing, laying and maintaining the United Kingdom's share (approximately half) of the £80M Commonwealth round-the-world telephone cable system. This is announced in the annual report. The Post Office has been assigned the main responsibility for designing and engineering the telephone cables as far as this country is concerned.

Provision is made in a new partnership between C. & W. and the Post Office for the establishment of a joint submarine cable and repeater development unit which will be controlled by R. J. Halsey, Post Office Director of Research, who was elected a director of Cable and Wireless Ltd., at the annual general meeting on July 29th.

Faraday Lecture

THIS session's Faraday lecture of the I.E.E. is being given by Professor M. G. Say and the subject is "electrical machines"—which he defines as converters of energy from, or into, electrical form. In his synopsis he says the loudspeaker is strictly a "machine" producing acoustic from electrical

energy. The lecture will be delivered first at Glasgow on November 25th and repeated at Sheffield (Dec. 1st); Nottingham (Dec. 3rd); Birmingham (Jan. 19th); Cardiff (Jan. 21st); Southampton (Feb. 15th); London (Feb. 17th); Rugby (Feb. 19th); Hanley (March 8th); Liverpool (March 10th) and Dublin (March 14th).

Air Electronics

THE first "maintenance meeting" of the European Airlines Electronics Committee was held in London on September 22nd and 23rd. It was attended by radio and electronics representatives of 11 airlines. By invitation representatives attended from the Air Transport Electronics Council, the Electronic Engineering Association and the Society of British Aircraft Constructors.

The meeting covered radio and instrument systems in aircraft and manufacturers emphasized how valuable it would be to them if airlines could have a common policy on maintenance practice—for example, whether they would wish to continue to overhaul equipment, or would find it advantageous to discard modules which failed.

Inst.P.-Phys. Soc. Merger?—The amalgamation of the Institute of Physics and the Physical Society is foreshadowed in the annual report of the Institute. A scheme for amalgamation is being submitted to members of both bodies. The report also records that the Institute membership of all groups increased by 415 in the year under review, bringing the total to 6,309.

Junior Institution of Engineers.—Two of the 1958/59 awards of the Junior Institution of Engineers are for papers on radio and electronic subjects. The Institution's silver medal is awarded to John Heywood, who is a lecturer in the Department of Telecommunications at the Norwood Technical College, for his paper "Radio measurements on the Russian earth satellites." The Tooke award has been given to W. J. Kease and A. C. Quarterman, who are both in the computer division of E.M.I. Electronics, for their paper "Computers and materials handling."

Dutch Firato.—The total number of visitors to the recent Dutch radio and television exhibition, on which we give a report elsewhere in the issue, was 167,201.

U.S. Television.—Ten per cent of the 45M television equipped homes in the United States have more than one set, making a total of nearly 50M receivers in use. These figures were issued by the Advertising Research Foundation of America.

Electronic Systems Laboratory is the new name adopted by what was previously known as the Servomechanisms Laboratory of the Massachusetts Institute of Technology. The laboratory was established in 1940 and Professor J. F. Reintjes has been director since 1953.

"Designing a Transistor Receiver."—It has been pointed out that the Ferranti ZS10B rectifier (included among the alternatives for the mains unit on p. 367 of the September issue) is rated at 0.1A. The load current in each arm of the bridge rectifier is 0.3A and so the correct Ferranti rectifier is the ZS30B.

Can you help?—A reader is trying to trace a copy of Electronchart No. 1 giving details of an amplifier, which was issued about 10 years ago. Information to D. W. S., c/o Editor.

Memorial to T. L. Eckersley.—A bronze bust of her late husband; who died in February, has been presented to the Marconi Company by Mrs. E. Eckersley. The bronze, which was executed by the late Kathleen Scott, now stands in the Marconi Research and Development Laboratories at Great Baddow, Essex.

Physics of Semiconductors.—The fifth international conference on the physics of semiconductors to be held under the auspices of the International Union of Pure and Applied Physics is being organized by the Czechoslovak Academy of Science. It will be held in Prague from August 29th to September 2nd next year.

Computer Reliability and Maintenance.—A series of discussion meetings is to be held on January 20th and 21st next year at the Institution of Electrical Engineers, Savoy Place, London, W.C.2, which will deal with the managerial and engineering aspects of reliability and maintenance of digital computer systems. The British Computer Society will be responsible for arranging the meetings on the first day. The second day's meetings will be organized by the Measurement and Control Section of the I.E.E.

Dover.—Low-power tests from a temporary 75-foot mast on the site of the I.T.A. station at Church Hougham, near Dover, began towards the end of September. Full-power tests, using the recently completed 750-foot mast, will begin towards the end of November in preparation for the opening of the station by Christmas. The station radiates vertically polarized signals in channel 10. It will be equipped with a directional aerial giving a maximum e.r.p. of 100kW.

Receiving Licences.—Combined television and sound licences in the U.K. increased during August by 77,868, bringing the total to 9,627,657. Sound only licences, total 5,281,581, including 401,981 for sets fitted in cars. The overall total of 14,909,238 was an increase of 226,113 on the August figure last year.

Liverpool College of Technology.—A full-time eight-months' course in electrical engineering in preparation for the I.E.E. Part III examination is being conducted at the Liverpool College of Technology. The course will take the place of the usual two- or three-year part-time day or evening course of study for the examination. The course opened on October 5th, but late entrants will be accepted.

Radar Navigation.—To give ships' Masters and senior deck officers experience in the use of radar as an aid in manœuvring a ship, a radar simulator course has been introduced at the Sir John Cass College, London. The course, which will last five days, is approved by the Ministry of Transport and Civil Aviation and similar courses are expected to be introduced at other colleges shortly.

Pulse Circuit Design.—A course of 23 evening lectures in pulse circuit design began at Twickenham Technical College, Middlesex, on October 8th. The lectures, in which special consideration is being given to circuits using transistors under pulse conditions, are delivered at 7.0 on Thursdays. The college is also conducting a course of 18 lectures on Monday evenings covering computer programming. It began on October 12th.

Hendon Technical College is conducting a number of special courses for advanced students during the Autumn term. Among them is one on industrial electronics for mechanical engineers. It consists of 15 lectures on Tuesday afternoons from October 20th. A course of seven lectures on ultrasonics is being held on Wednesday evenings.

Higher Technological Courses covering a very wide variety of subjects at some 40 colleges in London and the Home Counties are listed in the 1959/60 bulletin issued by the Regional Advisory Council for Technological Education. It costs 3s 6d post free from the Council at Tavistock House South, Tavistock Square, London, W.C.1.

Personalities

Sir Owen Wansbrough-Jones, K.B.E., C.B., Chief Scientist to the Ministry of Supply, has resigned to take up an appointment in industry. He is succeeded by **Robert Cockburn**, C.B., O.B.E., M.Sc., Ph.D., who has been Controller of Guided Weapons and Electronics in the Ministry since 1956. Dr. Cockburn, who is 50, taught physics at Portsmouth and West Ham Municipal Colleges before he joined the radio department at the Royal Aircraft Establishment, Farnborough, in 1937. Two years later he became head of the radio counter-measures division of T.R.E. In 1947 he was awarded the American Medal of Merit for his work in this field. In 1945 he transferred to atomic energy research, and three years later was appointed scientific adviser to the Air Ministry. He has been with the Ministry of Supply since 1954.



Dr. R. Cockburn



J. E. Clark

J. E. Clark, M.I.E.E., managing director of Cathodeon Electronic, Ltd., has been elected to succeed **D. C. Birkinshaw**, M.B.E., M.A., as chairman of the council of the Television Society. Mr. Clark, who is 55, joined Cathodeon as a director in 1950. For the previous 15 years he had been with the Ekco organization; 11 years with E. K. Cole, Ltd., and four years with Ekco-Ensign.

John B. Adams has been appointed by the United Kingdom Atomic Energy Authority to be director of a new establishment to be set up to deal with controlled thermo-nuclear research. The site of this new establishment is not yet decided. During the war Mr. Adams, who is 39, worked at the Telecommunications Research Establishment on the development of centimetric radar. From 1946 to 1953 he was at the Atomic Energy Research Establishment, Harwell, where he was a member of the team which designed and built there the 110-inch diameter cyclotron. Since 1953 he has been working with the proton and synchrotron group of the European Council for Nuclear Research.

C. B. Speedy, Ph.D., B.E., Assoc.I.E.E., has been appointed to the board of Lion Electronic Developments Ltd. Dr. Speedy is also a director of Gresham Developments Ltd. The two companies are associated, the manufacturing facilities of Lion Electronic Developments being used to implement the research, design and development activities of Gresham Developments.

A. Witkin has joined N.G.N. Electrical Ltd., of Accrington, Lancs., as Southern England technical representative for their high-vacuum products. For some time he was doing research work on microwave valves at the G.E.C. Research Laboratories and more recently with the valve research group of Elliott Brothers. He was for a short while in the National Physical Laboratory of the Government of Israel Research Council.

B.I.C. Construction Co. recently announced the appointments of **J. N. Gibson**, **J. R. McDonald**, B.Sc. (Eng.), A.M.I.E.E., and **D. M. H. Rooney**, M.A., A.M.I.E.E., as executive directors. Mr. Gibson became chief supervising engineer in the power cable contracts department of the company in 1949. In 1955 he was appointed manager, submarine cable contracts in B.I.C. Construction Co., and a director of BIC (Submarine Cables) Ltd. Mr. McDonald joined the company in 1958 as contract manager (overseas projects) in the telecommunications cable contracts department. He was in the G.P.O. Engineering Department from 1936 until some time after the war. From 1951 to 1958 he was chief engineer and director of the Jamaica Telephone Co. Mr. Rooney, after a college apprenticeship course with Metropolitan Vickers and five years with the Royal Navy, joined British Insulated Callender's Cables Ltd., as an assistant engineer in the Civil Engineering (Traction) Department. In 1955 he became regional manager for India, Pakistan and Ceylon and a director of BIC (Export) Ltd.

G. H. Metson, Ph.D., M.Sc.(Eng.), M.I.E.E., deputy chief scientific officer in the thermionics division of the Post Office Research Station, Dollis Hill, has been awarded the degree of Doctor of Science by Queen's University, Belfast, for his work on the thermionic valve and particularly on the oxide-coated cathode. Dr. Metson led the team concerned with the development of the long-life steep-slope pentode valves used in the repeaters for the Newfoundland-Nova Scotia section of the first transatlantic telephone cable. He joined the Post Office as a youth-in-training in 1925.

Semiconductors Ltd., the Plessey-Philco company, announces the formation of an executive board headed by **Dr. James Reekie**, who becomes executive director and general manager. Dr. Reekie was in Canada for twelve years before joining the company as chief engineer in 1957. While in Canada he was for some time Professor of Physics at the University of Toronto and immediately prior to returning to this country was research director in semiconductors and solid-state physics of the Northern Electric Co., Montreal. **C. H. Noton**, who recently joined the company as commercial manager, becomes commercial executive director of Semiconductors Ltd. and **E. E. Webster**, central production executive, Swindon Region, of the Plessey Co., is also appointed an executive director.

A. Bodley Scott, D.F.H., M.I.E.E., appointed technical director of Bryans Aeroequipment, Ltd., of Mitcham, Surrey, was an Admiralty scientist specializing in guided weapons, electronics and servo systems, until joining the company 18 months ago.

F. J. Jervis, B.Sc.(Eng.), A.M.Brit.I.R.E., has joined Nash and Thompson Ltd., as contracts manager. He is responsible for all commercial aspects of research, development and manufacturing contract work. Since 1951 he has been a production engineer in the Guided Weapons Department of the Ministry of Supply. Prior to joining the Ministry he had been in industry since 1924, having been with Aerovox Radio Ltd. and All Power Transformers Ltd.

Dr. Harvey Fletcher, Director of Research and Dean at Brigham Young University, Utah, a pioneer in psycho-acoustics, has been appointed an honorary member of the Society of Motion Picture and Television Engineers. The citation refers to the Fletcher-Munson curves on the relation between frequency, intensity, and loudness.

Aubrey Harris, A.M.I.E.E., A.M.Brit.I.R.E., who has been appointed the technical representative in the Fribourg, Switzerland, offices of Ampex International, S.A., will be concerned with video-tape recorder applications. He joined the Ampex Corp. in California last year. From 1952-57 he was with Marconi's at Chelmsford, following which he was for a year chief engineer of Bermuda's commercial television station. He is 30.

L. A. Sweny, manager of Marconi's Aeronautical Division since 1946, has retired and has become a director of Hovercraft Development Ltd. He is 60. Mr. Sweny had been with Marconi's since 1936 except for the period 1942-1946 during which he was for two years in the Fleet Air Arm and for two years Assistant Director of Communications Development (Naval) with the Ministry of Aircraft Production. He was for some years in the Department of Civil Aviation at the Air Ministry and in 1934 was appointed signals officer in charge of the U.K. Civil Aviation Signals Organization. His successor as manager of Marconi's Aeronautical Division is **B. J. O'Kane**, Ph.D., B.Eng., A.M.I.E.E., who for the past seven years has been the company's chief air radio engineer. In 1935 Dr. O'Kane joined the staff at the G.E.C. Research Laboratories and in 1941 was seconded to the Telecommunications Research Establishment at Malvern. He returned to the G.E.C. in 1945. For his contribution to the development of radar—in particular the north-seeking p.p.i.—he was granted an award by the Royal Commission on Awards to Inventors. From 1947 to 1952 Dr. O'Kane was chief engineer of International Aeradio Ltd.



Dr. B. J. O'Kane



R. E. Cooke

R. E. Cooke, B.Sc.(Eng.), author of the article "Hum, Rumble and Noise," served with the Royal Naval Air Service during the war, working on airborne radio and radar equipment. Subsequently he obtained an honours degree in electrical engineering at London University,

and in 1951 joined the Mullard Radio Valve Co., where he eventually took charge of a section manufacturing cathode-ray tubes. In 1954 Mr. Cooke went to the B.B.C. Designs Department, Recording Section, dealing with problems in disc and tape-recording systems. He is now technical director of Wharfedale Wireless Works which he joined in 1955.

F. Langford-Smith, B.Sc., B.E., head of the Technical Publications Department of the English Electric Valve Co., has been elected an honorary member of the Audio Engineering Society of America in recognition of his contributions to audio engineering through his book "Radio Designer's Handbook." He is a vice-president of the British Sound Recording Association. Mr. Langford-Smith came to this country from Australia in 1957 to join the English Electric Valve Co., at Chelmsford. He had been with Amalgamated Wireless (Australasia) since 1932 where he was for some time engineer-in-charge of the company's valve laboratory.



F. Langford-Smith

Robert L. Cogdale has been appointed European resident technical representative of Marconi Instruments and will reside near Paris.

OBITUARY

Geoffrey Bernard-Baker, design executive in Murphy's television and radio division, died suddenly on August 27th at the age of 52. He was one of a group of young graduates who joined the company's laboratories in 1932 and was a well-known figure in the industry's engineering circles.

Dr. Russell H. Varian, who with his brother Sigurd invented the klystron, died on July 28th, at the age of 61. He was chairman of the board of Varian Associates, of California, which he helped to found in 1948.

News from the Industry

Electric and Musical Industries announce a group net profit for the year ended on June 30th of £2.232M compared with £2.156M last year. The U.K. and overseas taxation absorbed £2.534M compared with £2.573M the previous year.

B.R.W.—Sir Robert Renwick, chairman of British Relay Wireless and Television, Ltd., in his report for the past year announced a group profit, after taxation, of £300,908 compared with £232,418 the previous year.

Radio and Television Trust Ltd.—Daniel D. Prenn, head of Truvox Ltd., has acquired, at a price approaching £500,000, Crompton Parkinson's interest in Radio and Television Trust Ltd. J. V. Daniel, a director of Crompton Parkinson, has resigned his appointment as a director of the Trust, and Mr. Prenn has succeeded him. Crompton Parkinson acquired a controlling interest in the Trust earlier this year. Airmec Ltd., is the manufacturing subsidiary of Radio and Television Trust Ltd.

Dulci Company has been taken over by Lee Products (Great Britain) Ltd. The Dulci factory at Willesden, London, N.W.2. is to continue producing Dulci equipment.

Admiralty W/T Station.—Marconi's supplied 20 of the 30 transmitters referred to in the note on page 391 of our last issue; the remainder being provided by Standard Telephones and Cables. The S.T.C. installation included eight 30-kW h.f. transmitters. B.I. Callender's Cables supplied four 600-foot masts for the long-wave aerials and 58 lattice steel masts for the rhombic aerials. The open wire automatic aerial exchange by which any one of ten transmitters can be connected to any one of twenty aerials was designed, manufactured and installed under contract to the Admiralty by P. & L. Millers Ltd., of London, E.1.

Electric Audio Reproducers, Ltd., of The Square, Isleworth, Middx., which became a subsidiary of the Gas Purification and Chemical Company some time ago, has been re-acquired by L. Stone and two other former directors of the company, E. Kaye and J. R. Sharp.

Raytheon Company, of Waltham, Mass., has appointed Dr. Carlo Calosi to the newly created post of vice-president, Europe. He will be responsible for European production of Raytheon equipment as well as European sales and distribution of their products manufactured both in the U.S. and on the Continent.

Audiotape, the magnetic recording tape manufactured by Audio Devices Inc., of New York, is now available in this country through Lee Products (Great Britain) Ltd., who have been appointed sole concessionaires for the U.K. and Eire.

Marconi Instruments' mobile showroom and demonstration unit, which was used initially at the Farnborough Air Show, is touring the Midlands and the North of England. It is planned to go on a four-month tour of Western Europe next year.

Avo, Ltd., now a member of the Metal Industries Group, has secured a £14,000 order from the Ministry of Supply for portable electronic multi-range measuring instruments of panclimatic construction. The instrument provides 97 measurement ranges which cover a.c. and d.c. current; voltage; r.f.; resistance and also 36 audio power measurements over a range of 120dB.

Marconi's are to supply seventy-five 21-inch picture monitors for the studio production control rooms at the B.B.C.'s new Television Centre. These monitors, Type BD850, are suitable for use on 405, 525 or 625 lines, the change-over from one standard to another being made by four simple wiring modifications and changing one capacitor.

Closed-circuit television for both live and film transmission is among the facilities provided in the film projection theatre equipped by the G.B.-Kalee division of Rank Precision Industries, Ltd., in the May Fair Hotel, London, W.1. Pye equipment is used for the closed-circuit television chain.

Teleng Ltd., is the new name of the company previously known as Telefusion (Engineering Ltd.) They are planning to treble the floor space at their Harold Wood, Essex, factory to increase the production of the Teleng range of television-f.m. relay equipment.

Minns Electronics, of The Lower Mill, Kingston Road, Ewell, Surrey, has been formed to manufacture initially wide-band transformers and amplifiers and test gear for transistor production. The directors, R. H. Minns and S. E. Minns will also act as consultants.

Gothic Electronic Industries, Ltd., of Hampton Street, Birmingham, 19, is the new name adopted by Foresight Productions, Ltd., of the same address. They have recently produced the "Tramp" transistorized portable p.o. amplifier, with built-in loudspeaker, weighing 3½lb with battery. The company's general manager is D. Bates who was previously with Stratton & Co.

EXPORT NEWS

Microwave Telephone Network.—Standard Telephones & Cables installed the equipment for Malaya's first microwave trunk telephone network inaugurated on September 26th. The system, which connects Kuala Lumpur and Singapore with other centres of population, incorporates six radio links interconnected by multiplex channelling equipment. The main route between Kuala Lumpur and Singapore has a capacity of 600 telephone circuits and the spurs 240.

A tropospheric scatter link providing six speech channels between Trinidad and Barbados is to be set up by Cable & Wireless. Marconi's are supplying two 1-kW transmitters for each site. Each transmitter will feed into a 30-ft parabola giving a maximum e.r.p. of 4MW. The Automatic Telephone & Electric Co. are to supply the carrier equipment and companders, and Marconi Instruments the test equipment.

Yugoslavia.—Marconi Instruments Ltd., are showing their latest telecommunication measurement equipments at the Ljubljana International "Modern Electronics" Fair which is being held from October 16th to 25th.

Transatlantic Telephony.—Nearly half the 4,900 miles of cable for the second transatlantic telephone circuit providing 36 circuits between the U.S. and France, was supplied by Submarine Cables Ltd. The remainder was supplied by companies in France, Germany and America. The fifty-seven one-way repeaters at 38-nautical-mile intervals in each of the two cables (one for each direction of transmission) linking Newfoundland with France were provided by the Western Electric Co., of America. In the 330-nautical-mile section of the cable from Clarenville, Newfoundland, to Sydney Mines, Nova Scotia, there are sixteen two-way repeaters supplied by Standard Telephones & Cables.

Sweden.—A market report on domestic sound and television receivers in Sweden has been issued by the Export Services Branch of the Board of Trade. Before mains receivers can be sold to the public in Sweden they must be approved by SEMKO (Svenska Elektriska Materialkontrollanstalten, Franzengatan 5, Stockholm 30). Seven different makes of U.K.-manufactured television receivers (17-in and 21-in) have received approval. According to the report, about 63% of the country's imports of sound and television receiving equipment in 1957 came from West Germany and 23% from the Netherlands. The U.K. share was 4%—about Kr.5M.

F.M. and television broadcasting equipment valued at approximately £292,000 has been ordered from Marconi's, through their agents Svenska Radioaktiebolaget, by the Royal Board of Swedish Telecommunications. The order includes 16 television transmitters, with associated sound transmitters and ancillary equipment, and 20 f.m. sound broadcasting transmitters.

Surveillance radar equipment has been ordered from Decca for installation at the airports at Malmo, Sweden, and Maiqueta, Caracas. The radar is the D.A.S.R.1 which operates in the S-band (around 3,000 Mc/s).

CLUB NEWS

Barnet.—A demonstrated talk by a representative of Wyndor Recording Co. will be given at the meeting of the Barnet and District Radio Club on October 27th. On November 24th there will be a lecture on aerials for the radio amateur by Ray Hills (G3HRH). The club meets on the last Tuesday of each month at 8.0 at The Red Lion Hotel, High Barnet.

Bexleyheath.—"International Amateur Radio" is the title of the talk to be given by Arthur Milne (G2MI) at the meeting of the North Kent Radio Society on November 26th. The club meets at 8.0 at the Congregational Hall, Chapel Road.

Cheam.—J. F. H. Aspinwall, of Redifon's communications laboratory, will be demonstrating the Redifon GR400 single sideband radio-telephone equipment at the meeting of the Sutton and Cheam Radio Society on November 17th. The meeting will be held at 8.0 at "The Harrow," Cheam Village.

Cleckheaton.—At the November 11th meeting of the Spen Valley Amateur Radio Society a member of the staff of the B.B.C. Holme Moss television station will talk about Z Matching. On the 25th the subject "Printed circuits" will be dealt with by a representative of Mains Radio Gramophones. Meetings are held at 7.30 at the George Hotel.

Derby.—Perspex and its uses for the amateur will be discussed by A. Hitchcock (G3ESB) in a talk to the Derby and District Amateur Radio Society at 7.30 on November 4th in Room 4, 119 Green Lane.

Dorking.—"Amateur radio in America" is the title of the talk to be given by C. Crook (G5BT) to members of the Dorking and District Radio Society on October 27th. Meetings are held on the second and fourth Tuesdays of each month at 8.0 at the Star and Garter Hotel.

Leeds.—At the meeting of the Leeds Amateur Radio Society on October 21st W. Ripley will discuss the building of a simple short-wave superhet receiver which he will demonstrate at the meeting on November 18th. On November 4th a stereo demonstration will be given by J. R. Hey. Meetings are held at 7.45 at Swarthmore Educational Centre, 4, Woodhouse Square, Leeds, 3.

The National Radio Show— In Retrospect

ANALYSIS OF TRENDS SEEN AT EARLS COURT BY "WIRELESS WORLD" STAFF


AERIALS

MANY factors influence aerial design and practice, e.g., the increasing number of transmitters (i.e., better coverage), improvements in receiver design and, last but by no means least, cost of production and erection. One comparatively recent outcome has been the small set-top "V" which the customer himself fits and adjusts. This configuration of elements is in itself interesting; because the resistive component of the feed impedance can be varied over quite wide limits by varying the angle included between the elements and the reactive component is changed by varying element lengths. By this means some sort of fairly-effective transfer of energy to the receiver input circuits can be achieved; but these small aerials are limited in scope mainly by their low "gain" even when placed in the best position to take advantage of the standing-wave pattern in the room. Improvements in receiver gain and noise factor help, and the last few years have seen some remarkable achievements: for instance Murphy quote for their new television receivers a gain of 16 times that of the equivalent 1955 models. However, another approach is to increase the "gain" of the aerial whilst retaining its "over-the-counter sale" character. An example of this was the Belling-Lee "Metropolitan" which has elements adjustable both for length (extending to about 40in compared with the 18in or so of the smaller aerials) and included angle. The base contains a centre-loading matching network which can be adjusted by a built-in switch and the smallest coils are printed with the switch contacts whilst the larger inductors are of self-supporting construction.

Matching, in various forms, has received a fair amount of attention; the X-aerial, for instance, has a feed impedance which may be as low as 20Ω , and the direct connection of this to an 80Ω feeder can result in a loss of gain or even a degradation of the directional characteristics. As the X-aerial is usually used because it has a good front-to-back ratio this latter point is particularly important. Several years ago Wolsey added a λ match (in basic form a pair of divergent bars connecting the feeder to an unbroken element) to their X aerial, calling it the Deltex, and Aerialite used folded elements (Dublex). Both these firms have changed their designs now—Wolsey (Model X75) retain the λ -match section; but they have added a small (30-pF) ceramic capacitor in series with the coaxial cable "inner", so that the result resembles a marriage between the λ and γ matches. (The γ match uses a feed rod parallel to the element and connected to it through a series capacitor.)



Labgear, in their new range of combined Band-I-X/III-Yagi arrays, have a more recognisable form

of γ match, the capacitive coupling being formed by a length of coaxial-cable inner pushed up inside the γ -match section. This also forms an unbalance-to-balance transformer and the Band-III section of the aerial can be mounted to receive transmissions of the same polarization as the Band-I aerial, or those at 90° to it. Aerialite have abandoned folded elements as a means of raising the feed impedance and have substituted instead a quarter-wave transformer of 35Ω coaxial cable. Another modified form of λ -match was noted on the J-Beam "Omnislot"; this is a medium-gain (6 to 8.5dB) slot array covering all Band-III channels (6 to 13 inclusive).



Detail of Labgear γ -match section on X-aerials. Resonant line connects Band-III Yagi to Band-I "X"

"C" Aerials Type 191 array. Band-I elements are attached to end of Band-III "aerial."

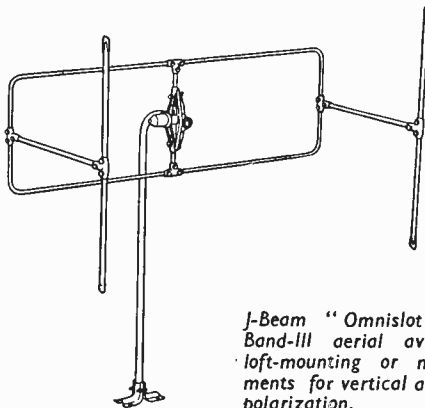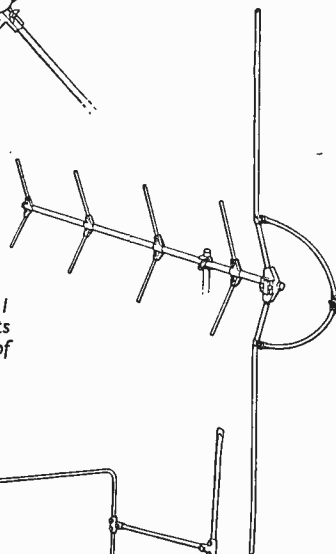

J-Beam "Omnislot" wideband Band-III aerial available with loft-mounting or mast attachments for vertical and horizontal polarization.

A newcomer to the Radio Show—"C" Aerials Ltd.—were showing Band III and Band II arrays, which one visitor described—rather uncharitably—as looking like emaciated kippers; however, there can be little doubt that something very interesting has been developed. In place of the customary folded dipole is a construction which resembles a simple dipole, which is bent towards the transmitter, with an electrically continuous "C" added at the "back." Some independently obtained test results for a *prototype* 6-element array showed a gain of $5\frac{1}{2}$ to $7\frac{1}{2}$ dB over the whole of Band III. It is claimed that the performance has since been increased considerably by careful attention to the first (i.e. next to the dipole) director, so that the gain on one channel is as high as 12 dB. Another advantage claimed for the aerial is the small number and amplitude of subsidiary lobes.


Combined Band-I/III aerials have been with us since the start of I.T.A. transmissions, but now that two Band-III stations can be received in some areas, the form of these aerials is likely to change. Wide-band Band I/III aerials were shown first three years ago (J-Beam). Last year Labgear were showing a wide-band V and J-Beam's new aerial this year was the "Omnislot" (mentioned above); but none of these provides for Band-III stations which are not co-sited. However, a new approach by Labgear consisted of a typical in-line Band-I/III combined array with another set of Band III directors, of independently adjustable line-of-fire (see picture p. 378, September issue). It might be thought that re-

radiation of either Band-III signal by the parasitic elements "not in use" would be a problem; however, it is claimed that, by making each set of directors of comparatively narrow bandwidth, the loss of signal is fairly small. Whilst on the subject of combined aerials it is worth noting that Aerialite have produced a small printed-circuit diplexer to replace their tuned-line "Crosslink" interconnection between Band-I and III sections. This is moulded into the feeder-connection block for protection from the weather.


Mechanically, little change from the continuous trend of simpler and quicker erection was noted. Aerialite have standardized all their fittings so that they are interchangeable, and Belling-Lee have introduced a new range of loft aerials using tubular booms and well-nigh indestructible plastics element clips. Another improvement came from Antiference, who were showing a new snap-erection element clip. This, called the "Rota-Click," is particularly ingenious in that it avoids the need for splitting the "end-of-boom" elements for packing; but allows them to be fitted to the boom at the factory. To avoid the danger of mechanical damage whilst the aerial is in its pack, all the elements lie along the boom, and the end elements are pushed through the clips so that they do not project beyond the end of the boom. To assemble the aerial it is necessary only to push the end elements through their clips until the pip in the centre of the element locates the hole in the clip; then each element is given a quarter turn so that the spigots on the clips drop into the holes in the circular pressing.

Accessories.—To obtain adequate separation in a diplexer between two Band-III signals one or two channels apart is no mean feat, and to combine this facility with a Band-I pass characteristic on one channel produces an accessory which will probably be in great demand in areas where two Band-III transmitters can be received. Actual circuit details of Labgear's diplexer were not available; but individually tuned circuits are employed, using four trimmers, two fixed capacitors and five inductors. Separation is claimed to be 15 dB for one-channel spacing, 20 dB for two, and the pass-band insertion loss is less than 1 dB.


Distribution equipment is obviously growing in importance and two new items were shown by Wolsey and Belling-Lee. Belling-Lee's new amplifier Type L1454 takes the form of a case containing

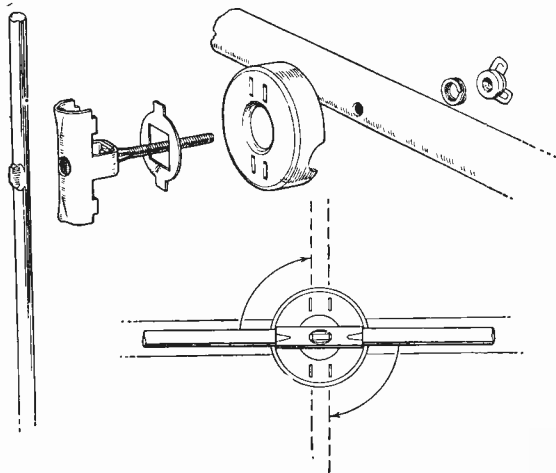

"Rota-click" snap-erection device (Antiference). Aerial can be folded for repacking by loosening wingnut.

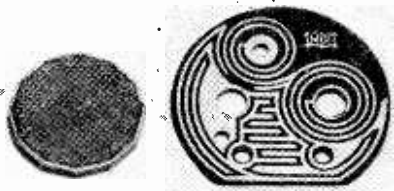

Printed-circuit diplexer panel for moulding into connector block (Aerialite).

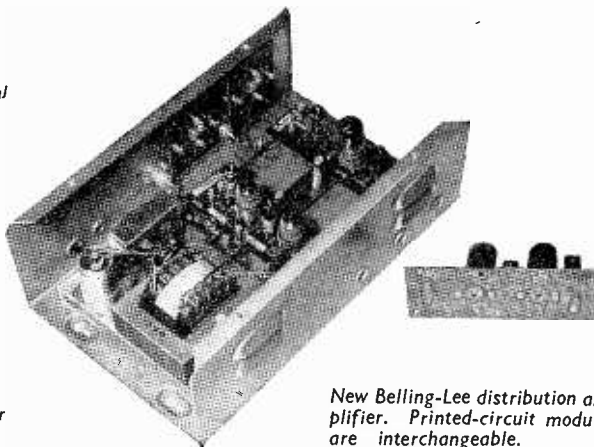

New Belling-Lee distribution amplifier. Printed-circuit modules are interchangeable.

a power unit and two triplexers: into this case can be fitted three "modules" on printed-circuit panels. These modules have a gain of more than 22dB on any one channel (or the whole of Band II) and they are secured by four screws—two contacting earth and the other two h.t. and l.t. supplies. Pentodes are used in all units—a single EF80-type for Band I and two EF95s for Band II and Band III. Any combination of modules may be used, and a lower noise factor is claimed than that of the previous cascode amplifiers!

To avoid cable loss at high frequencies, a quite-common practice is to convert the Band-III signal to a "vacant" Band-I channel for distribution. To do this Wolsey have added to their range of ampli-

fiers a "channel translator," which is a small unit in circuitry not unlike a receiver "front end"; but without the coil turret.

E.M.I. Sales and Service have developed a distribution system for both television and v.h.f./f.m. in which all the services available in a given district are translated into convenient channel frequencies and then passed through wide-band distributed amplifiers and coaxial lines to subscribers. Instead of the usual resistive attenuator pads designed to prevent mutual interference between receivers, directional couplers formed from a length of cable and a matching resistor are used in the E.M.I. system. These give a subscriber-to-subscriber loss of 56 to 62dB for a cable-to-subscriber loss of only 10 to 16dB.


TELEVISION RECEIVERS

THIS year saw the wholesale introduction of television sets with the new 110° short-neck cathode-ray tube. Almost every manufacturer had examples on show and the general effect of shallow-depth "slim" cabinets was very noticeable. The new tubes are in two sizes, 17-inch and 21-inch. With the 17-inch a reduction in cabinet depth of about 3 inches is possible over a set using an equivalent 90° tube. With the 21-inch a reduction of about 5 inches can be obtained. In fact, the average 17-inch set seems to be about 13 inches from front to back and the 21-inch set about 16 inches.

The measurement of maximum depth at the centre line is not really important, however, because various tricks are employed to make the cabinets appear thinner than they really are, and these tend to obscure the actual dimensions. In many sets, particularly the 17-inch portables, the sides are made only about 6-9 inches deep and the rest is taken up in a discreetly bulging back cover. This technique is genuinely useful in reducing bulk where the receiver is placed across the corner of a room, and it has been exploited to the full in the Philco "picture-on-the-wall" set illustrated last month (p. 380).


An alternative technique, of making the tube face project at the front, while still keeping the sides narrow, was introduced last year in the form of "picture frame" presentation. This year the same general principle has been applied in a more subtle way to give bow-fronted cabinets. Where two front-facing loudspeakers have been placed on either side of the screen there is sufficient frontal area to allow a pleasant continuation of the tube-face curvature in the cabinet.

One of the slimmest receivers at the Show, a new Ekco portable, had an overall depth of under 12 inches. This is made possible by the use of a new shorter-than-normal 110° c.r. tube, the 17-inch CME1705, just introduced by Siemens Ediswan. The short neck of this tube is achieved by a new design of electron gun and by mounting this gun as near to the deflection coils as possible without affecting focus quality and reducing deflection sensitivity too much. (Focus deterioration can occur if the beam is deflected off centre inside the electron lens system; loss of deflection sensitivity if the focusing action works against the deflection field.) As a result the tube has an overall length of

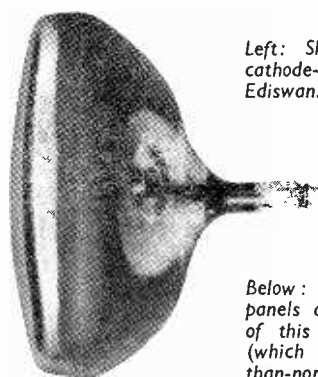

Left: Shorter-than-normal 110° cathode-ray tube made by Siemens Ediswan.

Below: Hinged printed-circuit panels are used on the chassis of this new Ekco portable (which has the above shorter-than-normal 110° tube).

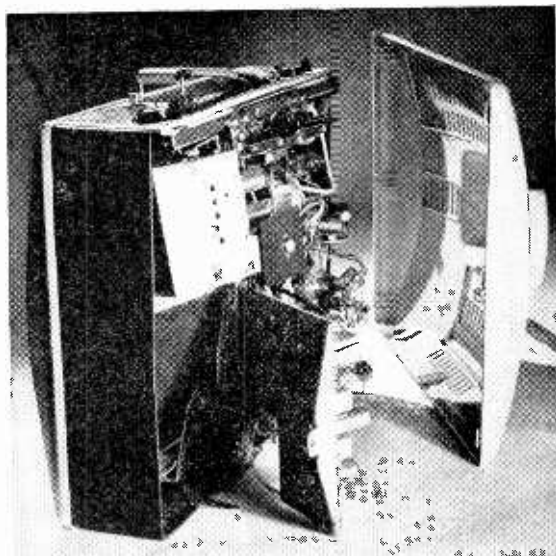

11½ inches, which is 1¼ inches shorter than the normal 17-inch 110° tube made by this firm.

Whereas the normal 110° tube uses a standard tetrode electrostatic-focus gun, as shown in Fig. 1 (a), in which the main focusing occurs at a "break" in the long final anode cylinder, the new version has a three-potential lens arrangement as shown at

(b). Here the acceleration and focusing of the beam take place simultaneously, so that a shorter length of gun is achieved. Cathode, grid and first anode follow normal practice. The main focusing lens, however, is formed by interposing the low-voltage cylinder A_2 between the first and final anodes. This effectively carries out the whole focusing action in what corresponds to the "pre-focus" region of the normal tetrode gun at (a).

With 110° sets in general, the widening of the scanning angle from 90° —just over 20%—would normally call for an increase of scanning power of about 50%, since the power required is proportional to the square of the deflection angle. Some of the ways in which this problem has been tackled have already been discussed in *Wireless World**. Part of the extra power requirement is offset by the narrower neck of the 110° tube, as explained. Another part is provided by line and frame output transformers of increased efficiency (improved ferrite core materials being used for the line output). There are not, in fact, any startling changes in the actual circuitry of the scanning generators, and the familiar PL81 line output pentode is still being used extensively in the new sets.

In R.G.D. and Regentone 110° receivers, extra scanning power is provided by raising the h.t. line voltage, and this is achieved by the interesting development of using silicon diode power rectifiers instead of thermionic or metal types. It means in practice that the current requirements of the scanning valves are not any greater than those for 90° deflection circuits. Higher h.t. voltage is obtained by virtue of the fact that the silicon junction rectifier is a higher efficiency device, with a very low forward resistance compared with that of the valve or metal rectifier. The h.t. line voltage of the receivers is, in fact, 230 volts, and the d.c. is provided by two S.T.C. silicon diodes in series, working half-wave into a $100\mu\text{F}$ reservoir capacitor, a 0.5H choke and a $400\mu\text{F}$ smoothing capacitor. Because of the small power dissipation in the silicon diodes they run very cool and this helps to keep down the general heat, which is something of a problem with the close packing of components in modern sets. The small size of the rectifiers helps to save space as well.

For efficient operation of the line output stage in wide-angle deflection circuits it is desirable that the working point of the valve should be stabilized against mains fluctuations, ageing of the valve and other such variations. If the peak voltages in the stage are stabilized it is possible to run the valve much closer to its limiting values without danger. One quite simple stabilizing circuit appeared in the line output stage of the Ferguson "500" series of 110° receivers. The essentials of this are shown in Fig. 2. It is basically an a.g.c. system which controls the gain of the PL81 output valve so as to maintain the flyback pulse at a constant amplitude. Since the flyback pulse depends on the current flowing through the line scanning coils then this scanning current waveform is also maintained at a constant amplitude.

The grid, and thereby the gain, of the PL81 is controlled by a voltage across a voltage-dependent resistor derived from the average value of the flyback pulse waveform (through capacitor C_1 from a connection on the line output transformer). The working point on the grid base of the valve is set by

* "110° Scanning," January, 1959, issue.

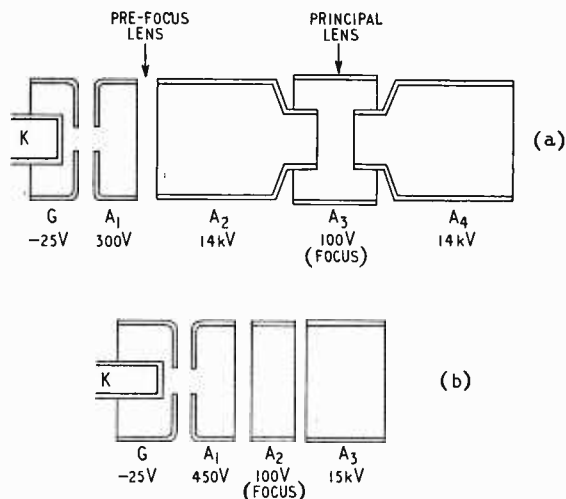


Fig. 1. Comparison of the normal tetrode gun (a) with the new shorter tri-potential gun (b) of Siemens Ediswan 110° cathode-ray tubes.

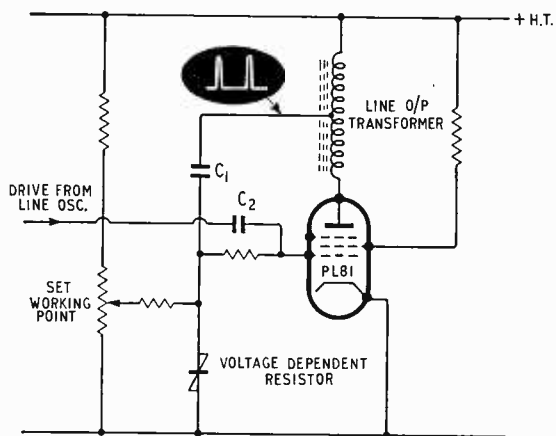


Fig. 2. Automatic stabilization circuit for line output stage on Ferguson receivers.

the d.c. potentiometer arrangement fed from the h.t. supply, while the coupling capacitor C_2 acts as a reservoir to convert the pulse waveform to a direct voltage. If the voltage-dependent resistor were a linear resistor the average value of the flyback waveform applied to the grid would be zero. But because of the non-linear characteristic of the voltage-dependent resistor, which gives a rectifying action, the average value as applied to the grid is slightly negative (i.e. the pulse waveform becomes distorted so that the positive side is decreased and the negative side is increased).

When some fluctuation causes, say, an increase in the flyback pulse amplitude, the negative control voltage is increased (but more than proportionately, owing to the non-linearity of the voltage dependent resistor), so that the gain of the PL81 is reduced and the flyback pulse amplitude is brought back to normal. Conversely, for a fluctuation in the other direction, the negative control voltage is reduced and the valve gain is increased.

Another development aiming to conserve power in the scanning system was a new type of picture

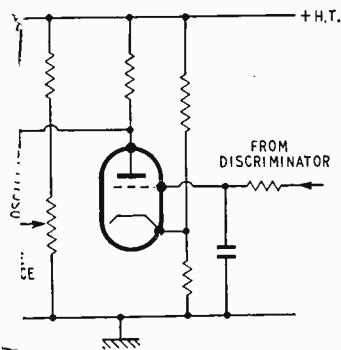


Fig. 3. Automatic frequency control circuit using a point contact diode, for operation on v.h.f./f.m. sound (Murphy).

centring device for the cathode-ray tube, demonstrated privately by Mullard. It was based on the familiar ring-shaped magnets, but instead of using metal rings it had plastic rings incorporating Magnadur magnetic material. These were magnetically polarized across diameters in the usual way.

The advantages of the plastic material are that it avoids eddy-current losses on the line scanning coils and avoids magnetic shorting of the frame coils (which is an important consideration with the greater fringe field produced by toroidal frame coils). As a result of the lack of shunting on the coils it is possible to place the plastic magnets closer to the centre of deflection and so reduce geometric distortion of the raster. (Such distortion occurs when the electron beam does not pass through the centre of the scanning coil assembly.) Mullard also had a smaller and lighter Ferroxcube core for scanning coils—a particular advantage in transportable receivers.

At the signal-frequency end of the set, the frame-grid type of r.f. amplifier valve is now being used extensively and making possible higher sensitivity receivers. This is particularly important with the transportable type of sets, which have to work from small indoor aerials. The majority of receivers use turret tuners, although Pye still favour the incremental inductance type and Bush the permeability type in their latest receivers. (Incidentally, Bush have extended their push-button station selector, introduced last year, to more models this year.)

A large proportion of new sets contain facilities for reception of v.h.f. sound programmes, so the early objection to this scheme—that the viewing public must have the medium-wave Radio Luxembourg amongst its sound programmes—cannot be valid any longer. Perhaps the I.T.A. has now more than satisfied this need. Even so, one manufacturer (Emerson) with the originality appropriate to a new boy at the Radio Show, was exhibiting a 17-inch 110° set which incorporated a Radio Luxembourg attachment—a two-valve a.m. tuner, in fact. The ferrite rod aerial could be orientated by a control at the back of the set.

Some of the receivers providing the v.h.f./f.m. sound facility still use the 38-Mc/s television intermediate frequency, with, in certain cases, the addition of an extra i.f. stage to improve the gain on f.m. The problems of selectivity with such a technique are well known, and a good many of the new sets provide for a 10.7-Mc/s i.f. when switched to v.h.f. sound. The valves in the i.f. amplifier sec-

tion have two i.f. transformers in series in their anode circuits, one tuned for the 38-Mc/s i.f. and one for the 10.7-Mc/s i.f. When the set is switched to the higher frequency for television, the 10.7 Mc/s transformer is shunted by its tuning capacitor, which appears as a low reactance and so does not affect the operation of the amplifier. When switched to 10.7 Mc/s for v.h.f. sound, the 38-Mc/s transformer appears as a low inductive reactance which again does not affect the operation of the amplifier.


With the narrower bandwidth of the v.h.f. sound circuits the stability of the local oscillator becomes a problem. Some receivers compensate for drift by means of negative-temperature-coefficient capacitors connected across the tuner coils. In the latest Murphy television receivers, however, an interesting a.f.c. circuit is provided for use on v.h.f. sound (appropriately, from a firm which pioneered a.f.c. in sound receivers in the 1930s). This makes use of a point-contact germanium diode as a variable capacitance device, connected as part of the oscillator tuning capacitance. It does not, however, work in the same manner as the well known reverse-biased junction-diode variable capacitance system. The capacitance of the point diode varies from about 1.5pF to about 2pF with an increase of the forward (rectification) current passed through it. This current is supplied by a one-valve d.c. amplifier, as shown in Fig. 3, which in turn receives a control signal from the f.m. discriminator (a balanced ratio detector).

When the receiver is correctly tuned there is no d.c. "error signal" from the discriminator. If the oscillator should drift in the direction of increasing frequency, a negative voltage from the discriminator causes a positive rise at the anode of the d.c. amplifier. This causes the forward current through the point contact diode to rise and its capacitance is increased, thereby lowering the oscillator frequency and bringing it back to normal. Conversely, a drift in the other direction produces a decrease in the diode capacitance and an opposite frequency correction. The potentiometer arrangement in Fig. 3 is for back biasing the diode so that it normally passes a forward current of about 300μA. Capacitor C is merely to isolate the oscillator from the direct voltage applied to the diode.


Incidentally, the new Murphy receivers still use the double superheterodyne principle described last year† to obtain the necessary selectivity. Instead of last year's four-position turret they now have a seven-position turret with separate positions for the Home, Light and Third programmes on v.h.f. sound. With the a.f.c. system no continuous tuning is required for sound, as was provided before.

Several new devices relating to picture quality were noted this year. All the latest receivers in the Pam range have been fitted with Polaroid filters in front of the screen to eliminate reflections of light sources and other brightly lit objects in the room. The picture contrast is improved as well, by elimination of reflection from the general room illumination. In these filters the light from the room passes first through a layer of material which allows only the waves polarized in one direction to be transmitted. These waves then pass through a "quarter-wave retardation sheet" (bonded to the first layer) which rotates their polarization by 45°


† *Wireless World*, October, 1958, p. 477.

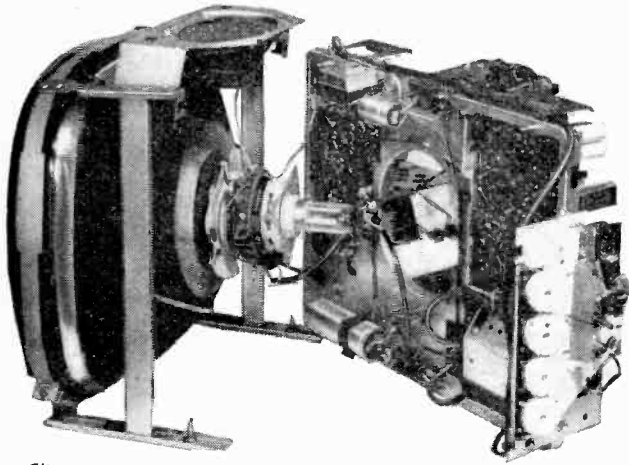


Clip-on chassis system in Sobell receivers to give accessibility for servicing.

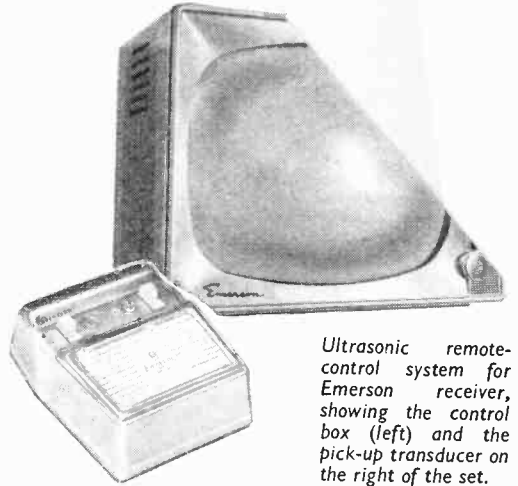

Ultrasonic remote-control system for Emerson receiver, showing the control box (left) and the pick-up transducer on the right of the set.

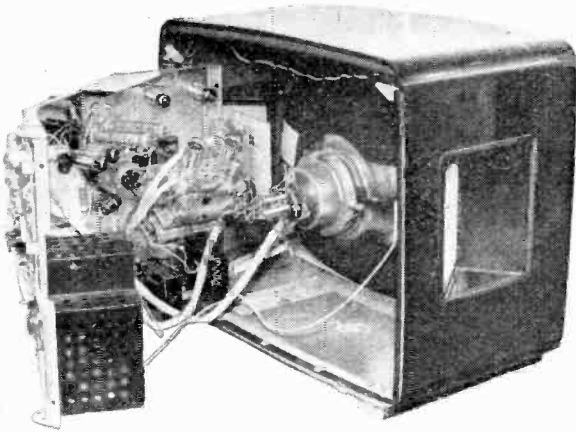

Hinged chassis in a Philips set, swung out to give access to all the circuitry.

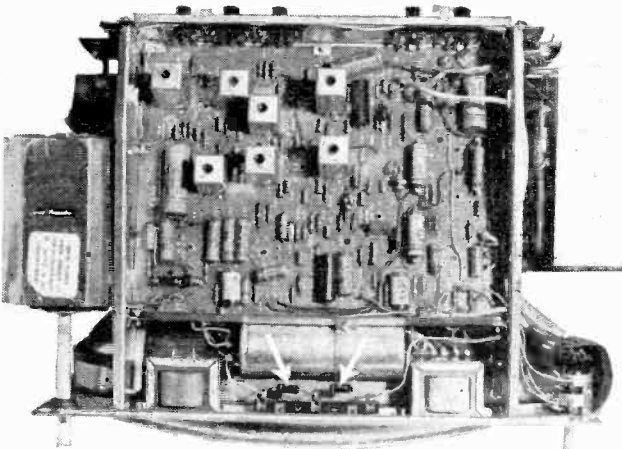

Underneath view of the horizontal printed-circuit chassis of R.G.D. and Regentone sets. The valves are on the other side. The silicon diode h.t. rectifiers are arrowed.

before they strike the tube face. After reflection from the tube face the light passes back through the quarter-wave sheet which rotates the polarization another 45° , so that the waves are now at 90° to the direction they were originally given by the polarizing layer. Consequently they have the wrong direction of polarization for passing back through the layer, and the layer blocks the reflected light (or, at least, 98-99% of it, according to claims) from the eye of the viewer. Since the reflected room light is virtually eliminated in this way while the light generated by the cathode-ray tube is merely polarized, giving only a slight reduction, the net result is an improvement in picture contrast. Unfortunately, a demonstration of the filter using two receivers, one with it and one without, was marred (at least when we saw it) by unequal settings of picture contrast, but the principle seems quite sound nevertheless.

Automatic systems for adjusting picture contrast in accordance with the strength of the room lighting are a feature of many Continental receivers, as reported in our last issue (p. 404).

None was seen in television sets at Earls Court, but Mullard privately demonstrated two methods using light-dependent resistors as the pick-up devices. In one, the light-dependent resistor is incorporated in the vision a.g.c. network of the set. This has the advantage that the pick-up device is used in d.c. circuits, so that the layout and length of leads are not critical. Moreover, the a.g.c. delay prevents the system from functioning on very weak signals, so that the full gain of the receiver is used. In the other method, the light-dependent resistor forms part of an attenuator network between the video amplifier and the c.r. tube. This has the advantages that the automatic contrast control is independent of the vision a.g.c. and that the sound signal amplitude is not affected (as it might be with the first method).

Picture "crispening" and "softening" were provided by push-button controls on one of the new Stella receivers. The "crispening" is achieved by

switching a CR filter network into the cathode circuit of the video output stage. This reduces the amplitude of the lower and middle frequencies and induces the video circuit to "ring" at the higher frequencies, thereby accentuating edges in the picture and giving the effect of an apparent increase in definition. The "softness" effect is achieved by limiting the highlights of the picture in much the same way as an interference limiter cuts off the white spots caused by ignition interference. In fact, the "soft" push-button switches a negative bias voltage to the suppressor grid of the video output valve which over-rides the negative bias already applied by an interference-limiter potentiometer. These negative biases set a limit to the maximum peak anode current so that interference pulses or video-signal peaks (according to the switching) saturate the valve and the intense whites do not appear on the screen.

Remote control of television sets from the armchair seems to be advancing in America, where already automobiles have atrophied the leg muscles and now television is completing the job by atrophying the will to use them. One example which has crossed the Atlantic, and was demonstrated at Earls Court, is the Emerson ultrasonic remote control system. The small armchair control box (see picture) contains a battery-powered transistor oscillator, for working at two frequencies in the region of 40kc/s, and a transmitting crystal transducer. On the television set another crystal transducer picks up the ultrasonic waves from the control box, and a frequency detector determines which of the two frequencies is being transmitted. One frequency is

used for controlling the station selector (by means of a stepping-motor drive system in the receiver) and the other for muting the sound output from the loudspeaker. Psychological note: there is no armchair provision for *switching off* the set.

Turning to mechanical matters, great emphasis was placed this year on the design of chassis for ease of servicing, and many firms displayed the insides of their sets to show just how well they had done. This problem of accessibility is particularly acute with the short-neck 110° tube, because a very close packing of components behind the bulb is necessary to preserve the slimness of cabinet which the tube makes possible.

Most sets have a vertical chassis, with the tube neck passing through a gap in the centre. Some designs have the chassis on hinges so that it can be swung sideways or upwards away from the tube assembly. Others have a chassis which clips on and off. Still others leave the main chassis frame fixed and provide a number of small printed-circuit sub-chassis which are either hinged or can be detached completely.

In the latest R.G.D. and Regentone models however, there was a reversion to the old idea of a horizontal chassis. In keeping with modern trends, it was a printed-circuit chassis, but it had the important difference that the valves were on the *opposite* side of the board to the components (valves on top and components below). This avoids the usual congestion of valves and coil screening cans which often makes it difficult to gain access to the components and their connections on a printed-circuit board.

SOUND RECEIVERS AND REPRODUCERS

Valve Receivers.—With major improvements in the valves themselves rather unlikely, developments in the field of valve receivers depend mainly on changes in programme transmission systems. With the last major development in transmission—v.h.f./f.m.—now some five years old, and the next—we would guess stereo transmissions—still some time to come, one would thus expect few radically new developments in the field of valve receivers, and this expectation continues to be borne out.

One change, however, was an increase in the number of f.m.-only receivers, so that these are now available from most of the major manufacturers and are no longer the rarity they have been in previous years. Such receivers cost only about £15.


A reflection of the increasing interest in tape recording is the now fairly common provision of an output socket for feeding a tape recorder. Although in some cases this socket was connected to the secondary of the receiver output transformer, in most cases it was connected prior to the output stage. This latter connection is preferable since it bypasses the output stage and transformer distortion which usually makes up by far the greater part of the total receiver audio amplifier distortion.

One new styling trend is the increasing number of "long low" shaped cabinets: another styling trend—the provision of edge-on control knobs—while already familiar in the field of television, is new to sound receivers.

Transistor Receivers.—In addition to the obvious

use of transistors in making very small receivers, we noted last year a trend towards providing transistor receivers to correspond to ordinary valve battery receivers in size as well as sound output and quality. This trend has already involved the use of larger loudspeakers and push-pull output stages, and continues this year with an increase in the maximum available output power to about one watt. The Murphy B385 can be used as either of the two types of transistor receiver, for the basic receiver unit may

Murphy B385 transistor basic receiver unit (centre) with alternative "neo-hide" (left) and wooden (back right) cabinets.

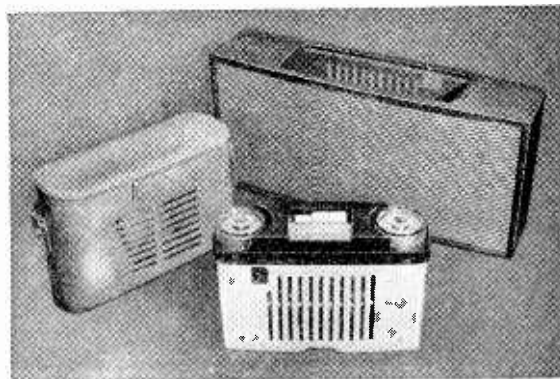


be placed in either a small "neo-hide" carrying case or alternatively, together with larger batteries, in a wooden table cabinet.

Sockets for connection to a car aerial to avoid changes in the signal input level from the directional internal aerial as the car heading alters were already provided last year by Perdio, and this year were incorporated in nearly all transistor receivers. In some cases the tuning scale was fitted at the top of the cabinet and this made a suitable size and shape to fit conveniently in the glove compartment of the car.

Most receivers now also provide full coverage of the long-wave band rather than the restriction to the switched reception on long waves of only the B.B.C. light programme, noted in some models last year.

Two receivers—the Pye "Cruiser" and Perdio "Continental"—now also cover the 80 to 190 metre

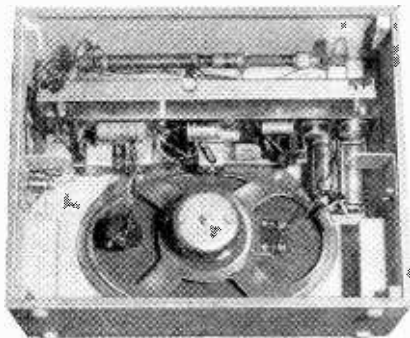

Perdio "Continental" transistor receiver using large output transistors and speaker.

"trawler" band. In the latter receiver the relatively high oscillator frequencies required are provided by the second harmonic of the OC44 oscillator.

The Perdio "Continental" is also interesting in that its r.f. bandwidth is automatically broadened if the signal strength increases—thus providing the maximum possible bandwidth for a given signal-to-noise ratio. This is achieved by feeding the detected signal voltage to a diode across the first i.f. coil to produce increased damping of this coil at higher signal voltages. This receiver also follows the trend of providing better quality audio by having a relatively high maximum output power of 1 watt and using a speaker as large as 8in by 5in.

Some guide as to things to come was given by the Mullard research laboratories private exhibits for set manufacturers. For covering short wavebands up to 26Mc/s frequency changers were shown using either two OC170's as a mixed and separate oscillator, or a single OC170 as a self-oscillating mixer. The latter system is of course more economical, but has a lower gain, higher noise, and is more likely to produce spurious responses than the former. With this

single OC170 system the second harmonic component of the oscillator output is used to cover the 12 to 26Mc/s band. An experimental a.m./f.m. transistor receiver using five r.f. and four a.f. transistors was also shown. The individual transistor functions follow rather closely their usual counterparts in a valve a.m./f.m. receiver except that in the transistor receiver there is an extra i.f. stage and a push-pull rather than a single-ended output stage is provided.

Stereophonic Record Reproducers.—Among the larger models the trend is towards placing all the equipment in a single cabinet, while among small models more examples were seen of the economical technique of making the lid detachable and using it as a baffle for one or (with a split lid) both loudspeakers. In general though, the wide variety of loudspeaker arrangements noted last year persists.


With single-cabinet stereo radio-grams the loudspeakers were nearly always positioned either at the ends facing forwards, or alternatively, at the sides facing sideways.

When only a single cabinet is used, the overall apparent sound field is generally restricted to the necessarily fairly small width (up to 5ft say) of this cabinet. For extending the sound field beyond the cabinet, most models provide for the use of separate extension speakers.

Two other methods of extending the sound field of a single cabinet were noted in the E.A.R. model 500 and Defiant AF9 radio-gram. In the latter case, the loudspeakers face sideways on to reflecting panels hinged about the back corners of the cabinet so as to provide wider-spaced forward-facing apparent sound sources behind these panels. In the E.A.R. model 500, sideways facing speaker enclosures are provided which can be hinged about the front corners of the cabinet to actually increase the spacing between the loudspeaker sound sources. Alternatively, this spacing can be increased still further in this model by detaching the loudspeaker enclosures altogether from the main cabinet.

To provide the direct sound which Decca feel is desirable to secure a good stereo effect at almost any point in front of their new Decola, they have used as
(Continued on page 445)

Stereo "Decola" showing two sets of six tweeters angled in various horizontal and vertical directions to give direct sound at most listening positions in front of the cabinet.

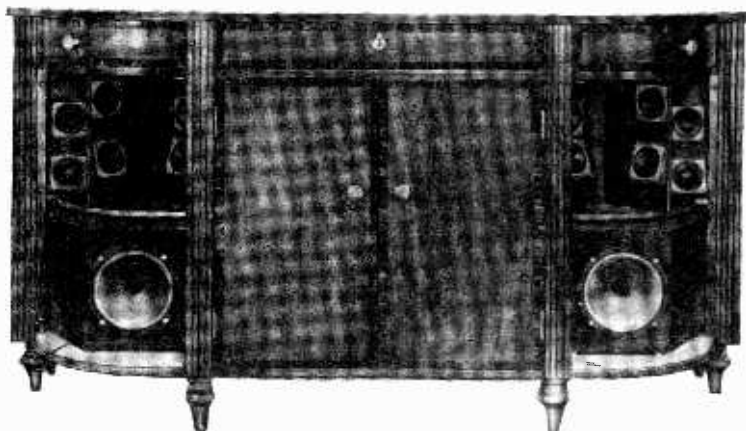

many as 6 tweeters for each stereo channel angled in one of 2 vertical or 3 horizontal directions. This model incorporates the Decca variable-reluctance stereo pickup.

One difference from last year which we noted was a considerable increase in the number of combined single-channel amplifier and speaker units for converting single-channel equipment to stereo.

The advent of stereo seems to have stimulated a desire for better-quality sound and control refinements, so that one now quite often finds such features as bass as well as the usual treble controls, balance controls, diamond styli, reflex loading and separate speakers for the treble and bass, even for example in relatively inexpensive stereo radio-grams where one would have expected the necessary complexities of stereo to absorb all the available finances. This trend was also observed in single-channel equipment.

An unusual and ingenious single-amplifier stereo "phantom" system was seen in the Emerson 502A record reproducer. In this system the two stereo channels are fed out-of-phase one to each of the two output valves which are connected as in a normal push-pull amplifier. These valves then act simultaneously both in push-pull in a normal transformer for the sum of the two channels, as well as in parallel for the difference between the two channels in an additional single-ended transformer which is connected between the centre-tap of the push-pull transformer and the h.t. supply. The total power available with this arrangement is nearly double that from the two valves operated separately single-ended. This type of circuit was more fully described in the "Technical Notebook" section of this journal for February 1959 (p. 80).

When single-ended amplifiers are used for the two stereo channels these are generally operated simply in parallel for single-channel reproduction. In Ferguson, H.M.V., and Marconiphone stereo radio-grams, however, they are connected in push-pull for single-channel radio reproduction, and at the same time the valve operating conditions are changed from class A to class AB. The net result is a higher total power output because of the change from class A to class AB, and reduced distortion because of the change from single-ended to push-pull. Moreover, the output stage current consumption is also reduced. This allows economies to be made in the mains transformer and rectifier which more than pay for the extra switching involved.

Another interesting feature of these Ferguson, H.M.V., and Marconiphone radio-grams is the use of a conveniently non-linear balance control so that, if the control knob is uniformly rotated, the rate of change produced is at first small to allow exact balancing in the usual case of circuits of nearly equal sensitivity, and then, as the knob is rotated further, the rate of change produced is much larger to allow balancing of circuits of widely-differing sensitivities.

A number of convenient additional facilities were noted. For example, in the Ekco model RP343 and Ferranti model RP1022 record reproducers in which two separate volume controls are used, a mute button is provided so that the sound can be silenced without disturbing both volume controls and thus also the balance. A useful facility in stereo systems in which the two cabinets are dissimilar was seen in several models. This was the provision of a stereo reverse switch to allow the two cabinets to be interchanged.

Where a loudspeaker is not in the same cabinet as its corresponding amplifier, arrangements must be made to ensure that this amplifier is not damaged if the speaker is disconnected. A simple method is to connect a jack socket to short the output transformer secondary if the plug is removed.



8. Brenell "Three Star" stereo recorder.

Tape Recorders.—Development in this field continues to be considerable. For example, the variety of tape decks used by manufacturers has been greatly increased by the recent introduction by B.S.R., Collaro and Garrard of new models. Both Trix and E.A.R. showed recorders using each of these decks.

One trend has been towards smaller sizes. This need not mean a reduction of playing time because of the recent introduction of double-play tape of half the standard thickness.

Another welcome trend has been in the direction of lower prices, several recorders now costing less than £30. A valve can be saved by using a single valve both as an erase oscillator on record as well as an audio output valve on replay. If the pentode part of an ECL82 triode-pentode is thus used, sufficient further gain can be obtained by using a single additional high-gain double-triode such as an ECC83. This two-valve arrangement was seen in recorders shown by Trix and Ferguson.

Several developments were also noted in the methods of determining the recording level. For example, the simple system of using two neon bulbs has previously been rather uncommon, but this year was seen on three recorders. In this method the two neons are arranged to strike at different levels so that, by adjusting the input level till the loudest sounds cause one neon to light but not the other, the peak recording level is restricted between two values. Restriction to within 10dB was provided in this way in a recorder shown by Alba, and to within 6dB in recorders shown by R.G.D. and Regentone (Mk 103).

Wide-angle sector EM71 magic eye recording level indicators were noted in tape recorders shown by REPS and R.G.D. (Mk 107). The wider sector angle allows more accurate measurement than with the familiar original sector magic eye, and the panel space taken up is less than with the recently introduced column-type indicators.

Stereo recording facilities are not very often provided even where stereo reproduction is possible. A recorder with this facility is the now well-established Reflectograph, and new models were introduced this year by Brenell (Three Star) and Veritone.

Stereo reproduction using separate heads with

their gaps staggered $1\frac{1}{8}$ -in apart was also demonstrated by Brenell using their Mark 5 deck (which has space for up to 4 heads). While crosstalk is almost eliminated by using separate heads, some trouble may be experienced in keeping the stagger distances sufficiently alike in different recorders to allow interchange of recordings.

To make the tape easier to handle the new Garrard deck incorporates a magazine. This contains two 4-in diameter reels so arranged that the tape is automatically placed in its correct position for playing, recording or rewinding by locating the magazine in its correct position on the tape deck. Correct magazine location is provided by tapered reel spindles and two raised ridges on the deck. Since lifting off and repositioning the magazine is so easy, fast rewind has been provided only in the forward direction. The supply spool runs on a friction pad to give correct tape tension. No pressure pads are used, the required close contact between the tape and head being produced by fingers which bear on the tape at either side of the record/replay head. The total wow and flutter is about 0.22% at the single tape speed provided ($3\frac{3}{4}$ in/sec). At this speed the record/replay head response can be extended up to 10kc/s by suitable equalization.


Unusual features were noted in two new recorders shown by Amplion. In their "Marine" recorder, operation from d.c. mains is possible using an internal 12-watt 50c/s oscillator incorporating four 6X4 valves in parallel push-pull. In their model A224 recorder, optional volume expansion of up to 6dB is possible using, in the prototype model, the standard method of connecting the output transformer secondary and loudspeaker across the two diagonals of a bridge consisting of two resistors and two lamps. The non-linear current/resistance characteristic of the lamps then provides the required expansion.

A professional portable stereo recorder shown by E.M.I. (the TR52) incorporates separate record and replay heads and amplifiers to allow monitoring of the signal recorded on the tape. Meter monitoring is possible of the signal in, signal out, record current, bias or erase on the sum of both channels or either separately.

Two sets of heads and tape tracking in both directions are used in the new R7 recorder shown by Truvox to allow both tape tracks to be played without having to turn the reels over. Other unusual features of this recorder are the provision of two alternative fast wind speeds to allow more accurate fast winding to a particular position on a tape, and the use of a linear slide type of volume control.

More emphasis than is usual on mechanical and thermal considerations is a feature of the range of REPS recorders. For example, mechanical noise is reduced by suspending the deck on rubber, and heating effects are minimized by the use of high-temperature lubricating grease and as many as five ventilation grilles. Electrical features include the use of humbucking coils to cancel the hum induced in the record/replay heads by the motors and mains transformer, and push-pull erase oscillators to eliminate d.c. components in the erase and bias waveforms and thus reduce tape noise.

A stereo head and twin pre-amplifier which can be clipped on the side of the Simon recorder to allow it to replay stereo tapes was recently introduced. **Tape Recording Accessories.**—Metro-Sound were showing a head cleaning fluid which is applied via

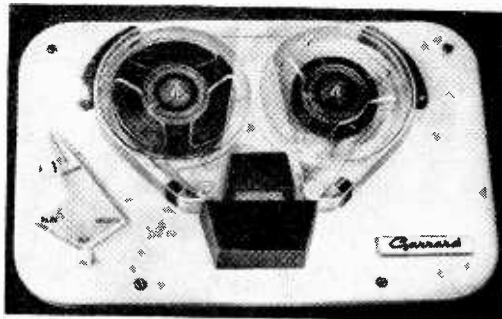

Garrard tape deck with magazine loading for ease of handling.

a special tape and also, for showing the position of a particular passage on the tape, small coloured strips called "Metro-tabs" which are folded over the edge of the tape and so dimensioned that they only obscure the indicated track. Tape Recorders (Electronics) were showing Sonocolor tape with black stripes across the back suitably spaced to provide a stroboscope for synchronization with film. Beam-Echo were showing a new range of stereo heads.

Stereo Microphones.—Like stereo tape recorders these, too, are rare. A twin ribbon model (VR65) has previously been shown by Lustraphone, and this year Cosmocord showed a twin crystal model. This contains two crystal pressure-differential figure-of-eight response inserts mounted at right angles to each other. The pressure-differential response results from cancellation effects obtained by mounting two ordinary crystals back-to-back. This cancellation also reduces the sensitivity by about 10dB and produces a frequency response rising at 6dB per octave which must be compensated for.

Loudspeakers.—An interesting sidelight of the action of the G.E.C. "Periphonic" enclosures is that the exceptionally heavy low-frequency loading produced on the loudspeaker cone tends to make this cone stay still so that the magnet moves. This tendency has now been eliminated in the G.E.C. metal cone speaker by means of a bracket round the magnet bolted to the speaker chassis. The result is an improved power-handling capacity below about 150c/s.

Two new single-cone full-range 10-in loudspeakers were introduced by Goodmans. Also introduced by this company was a horn-loaded tweeter in which the horn has been given an elliptical cross-section so that, by making the major axis vertical, a wide horizontal and narrow vertical response can be obtained, a requirement often advocated both for stereophonic and single-channel reproduction.

Gramophone Records.—A range of stereo records introduced by Saga is claimed to be compatible in that they can be played with an ordinary light tracking weight but low vertical compliance single-channel pickup without producing any deterioration in the stereophonic effect when using a stereo pickup. The special recording process involves, among other things, both a deeper recording cut and a wider groove spacing so as to produce a thicker groove wall. The recording time has been kept to the normal value of about 25 minutes per 12-in side by decreasing the groove spacing at low recorded amplitudes.

Pickup Cartridges.—An increase in the compliance

of the low tracking-weight crystal pickup described by J. Walton in our April issue now allows this cartridge to track at about 0.3gm. A prototype stereo version of this cartridge was also shown tracking at about 2gm.

Ceramic-element stereo cartridges were shown by Garrard and Electronic Reproducers. Compared with ordinary Rochelle salt crystals, ceramic elements offer lower dependence on temperature of the frequency response, higher possible operating temperatures and humidities, and a smaller size for the same output.

Electronic Reproducers also now manufacture in England under licence the German "Elac" range of variable-reluctance single-channel and moving-magnet stereo cartridges. The equivalent mass at the stylus tip of the stereo cartridges is about 2.3mgm.

Pickup Arms.—A prototype arm shown by Electronic Reproducers is unusual in that it uses a gimbal mounting. The gimbal pivots bear on a small rectangular metal block, the two vertical motion pivots being also attached to the arm and the two lateral to the pedestal. A weight counter-balance is used. The friction produced by this arm is claimed to be well below 0.2gm. It incorporates a raising and lowering device.

In the new inexpensive Cosmocord "Acopoise" arm the single axle lateral-motion pivot and the two cone and cup vertical-motion pivots have been placed nearly in line to minimize the side thrust produced by the pivot offset and an unlevel turntable (see J. Walton's article in our June issue).


Pre-amplifiers and Amplifiers.—One general trend seems to be towards combining these two units in a single chassis, even in the case of stereo equipment.

Unganged stereo bass and treble controls were used by a number of manufacturers. Avoidance of ganging facilitates balancing of dissimilar loudspeaker responses, and also allows a "pseudo-stereophonic" effect to be produced with single-

Acos stereo microphone.



Emisonic / Orthotone model 555 stereo combined comprehensive pre-amplifier/control unit and 2 x 10-watt amplifier.

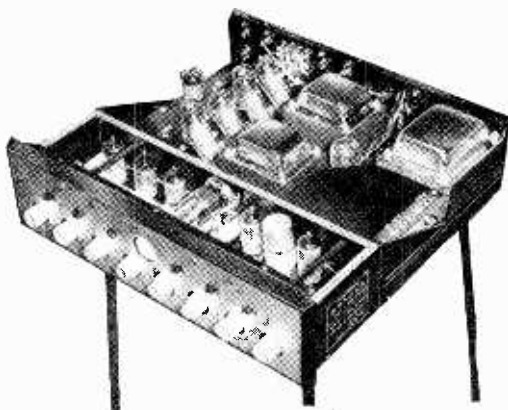

channel material by boosting the treble and cutting the bass to the left-hand speaker (to correspond to the frequency range of violins and their usual position in the orchestra) and cutting the treble and boosting the bass to the right-hand speaker (to correspond to the frequency range and position of cellos and basses). If the effects of these controls do not overlap or, as in the Tripletone units, a middle-frequency tone control is also provided so that middle frequencies can be fed to both speakers, then apparent sources may be produced in the middle as well as on the left and right, thus giving quite a convincing stereo effect.

New very comprehensive combined stereo tone controls and 2x10-watt amplifiers were shown by E.M.I. and Decca. Special features of the Decca FFSS "Stereo Sound" include a control for continuously altering the width of the overall sound field by introducing crosstalk between the two channels, and high and low-pass 18dB/octave filters whose cut-off frequency can be continuously varied. This amplifier also has an output impedance which below 400c/s can be varied between positive and negative values to apply the optimum damping to the loudspeaker voice coil in the frequency range in which rigid coupling also applies this damping to the loudspeaker cone. This enables the distortion produced by the loudspeaker at these low frequencies to be considerably reduced. This amplifier is also fitted with an optional bass-compensated volume (loudness) control for compensating for the alteration in the response of the ear at low frequencies to different sound intensity levels. The correct compensation for a particular intensity level is applied by adjusting a separate ordinary non-compensated volume control until the sound is either very quiet, quiet, loud or very loud, according to the position of the loudness control. Special features of the Emisonic/Orthotone 555 include the use of a 1-in. c.r.t. on which rectified signals from the two channels are backed off against each other. By fading down one channel and adjusting the calibrate control until a ¼-in deflection is obtained on the c.r.t. the power output from the other channel can be measured. The amplifiers can be balanced by injecting equal 50c/s hum signals from each transformer secondary and adjusting the controls until zero deflection is obtained on the c.r.t. The same hum signal can be used to check loudspeaker phasing, out-of-phase loudspeakers producing much less output than in phase ones at any point in a normal-sized room. A special feedback circuit in this amplifier has enabled the crosstalk at 15kc/s to be reduced to 30 dB. Normally, the crosstalk is much greater than this at such high frequencies, due to capacitive coupling between the contacts of switches to which both channels must be connected.

Conversion to stereo is made easy with the Tripletone "Convertible" combined single-channel pre-amplifier and 4-watt amplifier by provision of spindles on both sides of the potentiometer controls so that, when two "Convertibles" are bolted together front to back, corresponding controls can be mechanically ganged together.

A stereo amplifier balance indicator unit was also introduced by Tripletone. In this the two amplifier outputs are fed in opposite phases to a single speaker so that zero output in this speaker indicates amplifier balance.

Elements of Electronic Circuits

6.—IMPEDANCE TRANSFORMING AND MATCHING

By J. M. PETERS, B.Sc. (Eng.), A.M.I.E.E., A.M.Brit.I.R.E.

A CIRCUIT widely used as an impedance transforming and matching device, possessing a low input capacitance, is the cathode follower. As shown in Fig. 1, it is essentially an amplifier with the anode load and bias capacitor omitted, thereby producing a large amount of negative current feedback. The output is taken across the cathode resistor R_k which

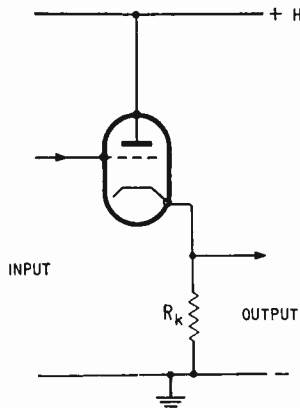


Fig. 1

is the load resistor. Voltage variations at the grid will produce anode (and hence cathode) current variations in phase, hence the cathode potential will rise and fall in sympathy with the grid voltage. It will be noted that the cathode voltage is in phase opposition to the anode voltage.

First let us consider the gain of such a circuit. In the absence of feedback let the amplifier have a gain A , then with feedback the new gain

$$A' = \frac{A}{1 + xA}$$

where x = the fraction of the output feedback. In this circuit let us assume $A = g_m R_k$ (it will be shown later that this is a legitimate assumption to make) and, as all the output is fed back, $x = 1$

$$A = \frac{g_m R_k}{1 + g_m R_k}$$

Now when $g_m R_k \gg 1$, $A' \approx 1$. Thus the gain approximates to unity.

It will be noted that the pentode approximation for gain, i.e. $g_m R_L$ (or $g_m R_k$ in this circuit as R_k is the load), has been used in the above reasoning although we are dealing with a triode cathode follower. This is permissible in pulse circuitry where small load resistors are normally encountered ($R_a \gg R_L$).

Now let us examine the output impedance. For an amplifier with feedback it can be shown that the output impedance is also reduced by the factor $1/(1 + xA)$ and can be written $R_o/(1 + xA)$ where R_o is the output impedance in the absence of feedback. For the cathode follower,

$$\text{output impedance} = \frac{R_k}{1 + 1 \cdot g_m R_k}$$

and when $g_m R_k \gg 1$ this tends to $1/g_m$. If we consider a high slope pentode with a g_m of, say, 10mA/volt, the output impedance is 100 Ω , i.e. very low compared with that of a conventional amplifier, and of a value suitable for matching to a cable or to an artificial line.

Finally let us examine the input impedance. In a normal valve amplifier, when the output voltage

is developed across an anode load resistor, the input admittance becomes a capacitive susceptance of value $\omega C_{gk} + \omega C_{ga}(1 + A)$ provided that the output voltage is in antiphase with the input, which is the case here. The input capacitance can therefore be written $C_{in} = C_{gk} + C_{ga}(1 + A)$, i.e. the input capacitance is increased by the factor $A \cdot C_{ga}$ due to the Miller effect. In the case of the cathode follower, since the anode is at earth potential so far as a.c. is concerned, C_{ga} may be considered as appearing across the input. Because the output voltage is now in phase with the input, the input admittance, still a capacitive susceptance, can be written

$$\omega C_{ga} + \omega C_{gk}(1 - A)$$

The input capacitance can therefore be written $C_{in} = C_{ga} + C_{gk}(1 - A)$. For a resistive load we have already shown that $A \approx 1$. Therefore the input capacitance reduces to C_{gk} , representing a much smaller input capacitance than that of a similar valve connected as a conventional amplifier.

Summarising, we have shown that the cathode follower possesses the following features:—

- (i) Low input capacitance and hence high input impedance at the frequencies considered.
- (ii) Low output impedance.
- (iii) A voltage gain of unity (or less).
- (iv) No phase inversion between input and output with a resistive load.

A circuit which in some ways is complementary to the cathode follower is the earthed-grid amplifier (Fig. 2), in that it possesses a low input impedance and a high output impedance. The anode and cathode voltages are in phase with each other.

The low input impedance can be used to advantage in the termination of cables but is more often used as the first stage of r.f. amplification in a receiver, where this attribute helps to prevent instability. A greater voltage amplification is possible than for a conventional amplifier using the same load.

It can be shown that if R_L is very small compared with R_a , and if μ is $\gg 1$, then the input impedance of the circuit approximates to $R_a/\mu = 1/g_m$ (similar to the output impedance of the cathode follower).

Examination of Fig. 2 will show that, because of the earthed grid, positive feedback due to the Miller effect can only occur through C_{ak} . As this is usually a very small capacitance, regeneration due to the feedback is minimized to a great extent.

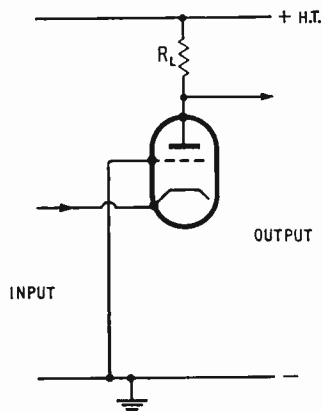


Fig. 2

INTERNATIONAL

FIRATO

in

AMSTERDAM



DURING the ten years of its existence the Dutch radio show has grown rapidly in size and importance. The 1950 show at Bellevue in Amsterdam covered only 3,400 sq ft; at this year's show, which was held from 1st to 8th September in the R.A.I. permanent exhibition building, there were over 200 stands covering an area of 220,000 sq ft and many applications for stand space had to be turned down. By next year the new R.A.I. exhibition buildings in the Europaplein will be ready for occupation, and it is expected that there will then be room for all. The accompanying photograph shows about half the area of the present R.A.I. building (there are annexes leading off to left and right).

The title of the exhibition is a play on the initials of the organizing body of the Dutch radio industry—the Fabrikanten, Importeurs, Agenten op Radio-gebied. The exhibition is by no means confined to domestic receivers and about a third of the space was occupied by measuring instruments, electronic equipment, transmitters and other capital goods. The manufacturing side of the Dutch radio industry, which includes the vast Philips organization, is by no means inconsiderable, but it is somewhat overshadowed—at least as far as this exhibition is concerned—by the large number of firms acting as agents and importers of foreign goods. Fully half of the stand space was occupied by dealers and some unusual sights were seen—for example, comprehensive and comparable displays of Hewlett-Packard, Rohde & Schwarz and Tektronix instruments side by side on the stand of C. N. Rood. Your reporter started to make lists of British firms (and of some of the German firms whose products had previously been noted at the Frankfurt exhibition), but he soon gave up—they were *all* represented somewhere in the exhibition in Amsterdam. So were many American, French and Japanese firms and there was one television receiver manufacturer “Rafena” from East Germany. It would have been impossible to do justice to all the interesting items seen at this exhibition in the short time available, and your reporter decided on this occasion to concentrate on the native products of Dutch industry which may not yet be so well known abroad.

A comprehensive range of first-class radio and television receivers, car radios and record players

is marketed under the name “Erres” by R. S. Stokvis & Zonen N.V. of Rotterdam, a large firm of domestic appliance manufacturers. The sets are made exclusively for Stokvis by the firm of van der Heem of The Hague, who are also well known as manufacturers of v.h.f. marine radio, stabilized power supplies and other electronic equipment, and the output of domestic receivers is generally acknowledged to be the second largest in Holland.

For viewers in the south of Holland, TV sets capable of receiving the four modulation systems used by stations within range in Holland, Belgium, France and Germany, are available from both Erres and Philips.

High-gain broad-band television aerials specially designed for receiving conditions in Holland are made by most of the Dutch aerial manufacturers. Two folded dipoles of unequal length, spaced and coupled together, form the active elements and in the Tewa Type TV510/09a aerial give gains, with a reflector and six directors, of between 9 and 10dB over channels 5 to 10. Another Dutch aerial firm, Messa Electronics N.V. of Rotterdam, makes a special feature of mechanical vibration damping by the use of loaded plastic clamps for assembling the elements. They also give a 3-year guarantee-certificate of electrical gain and mechanical performance with every aerial.

The range of Philips domestic radio, television and sound-reproducing equipment has already been noted in reports of the Earls Court and Frankfurt exhibitions, but several additional new developments were seen at Amsterdam. Most of the Philips table-model receivers and radio-gramophones on show were fitted with dual a.f. amplifiers and loud-speaker outlets operating on what is termed the “Bi-Ampli” principle. When reproducing stereophonic records, straight amplification is provided separately by each channel, but on radio reproduction the output from the detector is passed through filters, and low frequencies go the left- and high frequencies to the right-hand channel.

A new Philips television camera in cylindrical form measures only 8cm in diameter, and the Philips range of camera tubes includes a new vidicon, which at the time of our visit had not yet been given a type number. Also new is the Z510M



Main hall of the present R.A.I. exhibition buildings in Amsterdam.

decade numeral display tube. Transistorized units for digital computers with four bi-stable circuits on a printed-circuit board two or three inches square are new, and also cold-cathode programming units for industrial process control.

Philips have devoted considerable time and resources to the encouragement of an interest in radio and electronics among young people in Holland. First, there is a series of inexpensive constructors' kits, in which it is interesting to note that a start is made with transistors, for boys from 9 to 15 years, in simple "Pioneer" sets which can be wired without soldering and which lead to quite ambitious a.m./f.m. receivers with valves and, of course, soldering. There is even a build-it-yourself kit for a gramophone turntable. Second, a beautifully prepared series of coloured film strips and booklets showing the physical principles of valves and semiconductors; blackboard-sized working circuits and large sectional models of valves for use in schools and club lectures.

A visit to the Firato leaves little doubt as to the keenness of Dutch youth for construction and experiment and the stand of Amroh who make a wide range of constructors' kits was well beiseged, as were the stands of the publishers of technical journals and books. Amroh market a kit in which components are assembled on a perforated chassis to build first a simple crystal diode detector receiver to which may be added, step-by-step, up to three transistor amplifying stages, finally operating a loudspeaker. This is the simplest of a very complete series of kits for radio and high-quality record and tape reproduction. A special note was made of the quality of sound from the small (28 × 20 × 14in) "Verdi" reflex cabinet loudspeaker working on this stand: -

Gramophone motors, turntables, record changers and portable record players of Dutch design and manufacture were shown by the firm of Jobo N.V. who for some time have been making a very successful record changer ("Amusette"), in a distinctive circular housing of about 9in diameter. It plays up to twelve 7in, 45 r.p.m. records.

Servicemen were evidently interested in the Pope "universal TV-service koffer" (seen on the stand of valve dealers N. V. Malchus). This is a strong metal carrying case with foam plastic filling recessed

to take one each of all the valves required to service any given make of television receiver.

In the measurements section of the exhibition the Dutch firm of Peekel, whose multi-octave-band filters and strain-gauge instruments are widely known, were showing several new multi-channel strain gauges. Another Dutch firm, Nederlandsche Instrumenten en Electricische Apparaten Fabriek of Utrecht (N.I.E.A.F.), were showing a series of multi-range meters of original and functional styling in which both the meter and the range setting were very easy to read. Their "Polymeter-B" has d.c. ranges from 50 μ A to 10A and 100mV to 5,000V; a.c. 500 μ A and 2.5 to 5,000V; resistance 2k Ω to 20M Ω (all full-scale deflection).

A v.h.f. microvoltmeter (Type SM-2) designed by TEWEA (Technisch Wetenschappelijke Apparaten-fabriek, Amsterdam) is designed primarily for installation work on television aerials, which are the main product of the company. The meter has a frequency range of 46-230Mc/s and will read down to 10 μ V. It is battery operated (with built-in rechargeable Ni-Cd, low-tension accumulators) and weighs 12 $\frac{1}{2}$ lb.

Most exhibitions these days have their scientific "gimmicks" designed to catch the popular fancy, usually in the context of space travel, and the "star turn" at the Firato was a model of an earth satellite revolving slowly in orbit against a backcloth of the heavens. But the point of special interest was that the motor driving the model was powered by a panel of Ferranti silicon barrier-layer photo-cells illuminated by a small projector lamp of the kind used for viewing 35mm film strip.

Compared with the B.B.C. and I.T.A. exhibits at Earls Court the technical demonstrations of the Dutch N.R.U. and N.T.S. were small in size but every bit their equal in quality. Listeners' and viewers' problems were dealt with competently and sympathetically and there were demonstrations of television monitoring techniques and of the use of synthetic reverberation in sound broadcasting.

The untimely death last June of H. J. Kazemier, who was largely responsible for the establishment and growth of the Firato, was deeply felt by all sections of the industry, but it was generally agreed that this 10th exhibition was the complete success that he would have wished.

Distributed-Amplifier Transmitter is an unusual design just introduced by Marconi's which permits transmission on any frequency in the h.f. band without the usual re-tuning of r.f. power amplifiers. Transmission on two or more frequencies simultaneously is also possible. Distributed amplifiers are commonly used for wide-band amplification at low levels (e.g. in oscilloscopes) but not at high powers. The Marconi equipment has an output of 1kW in the range 2-24Mc/s. Basically the distributed amplifier consists of two artificial transmission lines with a series of valves between, the grids being connected to successive points on one line and the anodes to corresponding points on the other. The valves' grid and anode capacitances provide the shunt capacitances of the two lines, which are terminated by appropriate loads at both ends. An input signal applied to one end of the "grid" line travels along and each valve grid is driven in succession. In the "anode" line, the amplified signals produced in succession at the anodes also travel along, with corresponding time delays, and add up in the output load at the end of the line. (Actually half of the anode current of each valve travels to the output load and the other half travels in the opposite direction to be dissipated in the other terminating load.) There are two stages of such distributive amplification in the transmitter, giving gains of 26dB and 25dB respectively. Both stages have two distributed amplifiers, operating in push-pull to reduce even harmonics and improve overall efficiency. The system is insensitive to the nature of the load impedance to the extent that a 2:1 s.w.r. on the output feeder is permissible without appreciable reduction in output power.

Programmed Power Supplies, giving a sequence of pre-selected voltages, are the latest idea for rapid and automatic testing of equipment on production lines. The voltages are available as steps in a range (say 1-volt steps in a 100-volt range) and are switched as required to the equipment under test by means of instructions from punched cards, magnetic tape or other media. In a range of programmed power supplies manufactured by Southwestern Industrial Electronics, of Houston, Texas, U.S.A., the control is performed by binary-coded decimal data, and there is an error-correction system for making sure that the desired voltages have been properly selected. Stabilization is provided by transistor and magnetic-amplifier regulator circuits.

Tape Recording Mystery which has puzzled many people for years is the exact nature of the magnetization process by which the signals are recorded, using the h.f. bias method. L. H. Bedford, writing in the Sep-

Technical Notebook

tember, 1959, issue of *Electronic & Radio Engineer* analyses the phenomenon in detail and advances an interesting new theory to explain the mechanism. One conclusion is that what is "written" on the tape is a distorted version of the bias waveform, consisting of alternately polarized quarter-cycles of constant magnetization separated by quarter-cycles of transition. In the case of saturation bias, the signal is "written" as a variation of the mark/space ratio of this distorted waveform. With normal bias this mechanism also applies, but to it is added a variation in the relative magnitudes of opposite quarter-cycles of constant magnetization. Recording takes place at the trailing edge of the recording gap, so the length of this gap is not of primary importance.


Beam Microphone with a directional response characteristic nearly independent of frequency is described by H. J. Griese and O. Hoffmann in the February 1959 issue of *Radio Mentor*. This microphone is a development of the "nest of tubes" type in which the acoustic input feeds into a single tube of varying cross-section. Unfortunately, microphones of this type have responses which become more directional if the frequency rises. This change in the response can be avoided by arranging for the effective length of the tube to decrease with increasing frequency. In the new microphone this is done by inserting low-pass filters in the side of the tube. Each filter consists of a small hole acting as an acoustic mass which feeds via an acoustic resistance, capacitive enclosure and final hole acoustic mass into the open air.

Mercury-Wetted-Contact Relay, not to be confused with the conventional mercury relay, has precious metal contacts, enclosed in a glass tube, which are continually wetted by mercury supplied to the contacts by capillary action. It can be used in circuits for switching very heavy currents or in low-level applications where contact resistance is important. Originally developed by Bell Telephone Laboratories, the relay is used extensively in the U.S.A. It is now available in this country from Elliott Brothers (London). A life expectation of 10^9 operations is claimed, at speeds of operation up to 3 milliseconds, and the consistency

of operation is said to be within 1% of the minimum operating current.

Getting a Word in Edgeways, to a degree undreamed of by the most determined cocktail-party conversationalist, is achieved in a multi-channel telephone system now being developed at Bell Telephone Laboratories. Known as TASI (for Time Assignment Speech Interpolation) the system aims at increasing the capacity of submarine telephone cables. It is a kind of random time division multiplex system which makes use of the unused time occurring in the natural gaps and pauses in conversation and in the silences when one person is listening to the other. By means of electronic sampling and distribution the speech of any one person is switched from channel to channel according to the speech gaps which occur in those channels. When this person himself is silent, his channel is disconnected momentarily and used for the other conversations. In this way it becomes possible to connect many more talkers through a submarine cable than would normally be possible with the available number of channels.

Vibrating Pressure Transducer, giving an electrical signal output of which the frequency is proportional to mechanical pressure, has been put on the market by Solartron. It is actually a development of the Swedish firm Svenska Flygmotor Aktiebolaget. The vibrating element of the transducer is a cylinder, and the natural vibration frequency of this is varied by applied pressure in much the same way as the natural frequency of an electric bell trembler is varied by adjusting the stop which



bears against it. Excitation is from a miniature transistor feedback amplifier built on a printed circuit and encapsulated. In association with the mechanical system this forms an oscillator, the frequency of which indicates the applied pressure. The

frequency-variation system has the advantage that its accuracy is not affected by noise or other perturbations as an amplitude-variation system would be. Consequently the detecting and measuring apparatus can be situated at a considerable distance from the transducer itself. The transducer can also be used for analogue-to-digital conversion by counting the cycles of the output signal waveform.

Cold-cathode Tubes are usually thought of as being gas-filled devices in which the current is transported across the tube by the ionised gas. However, an electron-emitting cold-cathode has been developed in the U.S.A. by the Signals Corps Research and Development Laboratory and a subsequent contract to Tung-sol Electric Inc. has realized a practical hard-vacuum a.f. output valve using a cold cathode. The first discovery made was that a thin layer of magnesium oxide deposited on nickel continued to emit electrons after bombardment with an electron beam had ceased. By altering the positive potential applied to a collector electrode the emission could be varied from a few microamps to tens of milliamps, and could be maintained for many hours. It is thought that an avalanche process is started across the thickness of the cathode coating by a steep potential gradient built up when the first few electrons are emitted. This results in electrons reaching the surface of the coating with sufficient speed to shoot themselves free; then they come under the accelerating influence of the positively charged surrounding electrodes. The output valve developed resembles in structure a pentode. G_1 and g_2 are connected to a positive potential (about 300V minimum) through a limiting resistor—these form the emission sustaining grids—and g_2 is used as the control grid, which is again given a positive bias; but this is of smaller magnitude than that applied to the maintaining grids. Emission is started by “flashing” momentarily a lamp-like filament near the cathode. About 0.75W (roughly a tenth of the equivalent hot-cathode power) is required by the maintaining grids. Initial cost and noise level are similar to that of a hot-cathode valve and a sample has been in operation for about 14,000 hours without any decrease in emission. Further details are to be found in *Electronics* for February 6, 1959.

Data Recording Errors on magnetic tape can be avoided by a new technique devised by E.M.I. Electronics, for systems which require the use of at least two tracks on the tape simultaneously. For example, the required path of a machine tool cutter may be recorded as the phase modulation of a carrier signal relative to an unmodulated carrier on


another track. Or readings from several instruments and from a clock may be recorded on parallel tracks for later study of their time relationships. In each case the information may, to some extent, be distorted if, either on recording or replay, the line of heads is not at the standard angle of 90° to the travel of the tape. This error can be overcome if one of the recorded signals, preferably one which is a simple sine wave, is recorded on duplicate tracks near the outer edges of the tape. In the simple case where there are only two signals, one will be recorded at both edges and one at the centre of the tape. If the head is tilted, one of the outer channels will be advanced, and the other retarded, relative to the timing of the centre track. But if the two outer head signals are added together they will provide a reference signal in which the errors are very nearly compensated. The limitation is now eased to the extent that the edge tracks can be mis-timed to, say, $\pm 40^\circ$ of the clock signal phase before the reference becomes inadequate. If there are several information channels, as well as the duplicated reference channels at the edges of the tape, the signals from the two reference heads can be mixed in different proportions to generate the reference for the various data tracks. For instance, a track 30% across the width of the tape should be interpreted with regard to a reference generated by adding 70% of the first head signal to 30% of the last.

Light-Weight Submarine Cable, armourless and non-twisting, has been designed by the British Post Office and developed by Submarine Cables. Instead of the conventional outer armouring it has a central stranded steel wire to provide its mechanical strength. This is enclosed in a copper tube, to provide the central conductor of the coaxial system, and insulated with polythene

to a diameter of approximately one inch. Aluminium tapes (the outer conductor), together with a polythene binder tape and one aluminium screening tape with a polythene interleaving tape, are applied next. The whole is then given a lapping of anti-corrosion tape and an outer covering of polythene to an overall diameter of about $1\frac{1}{4}$ inches. The light-weight cable can be handled much more easily than armoured cable and this facilitates the laying of the repeaters. An order for 1,635 nautical miles of it has been placed by Cable & Wireless for the first section of the Commonwealth round-the-world telephone system. This will be laid between Scotland and Newfoundland in the summer of 1961.

“Sieve” Particle Counter, designed by F. J. G. van den Bosch, of Anvers, Belgium, is notable for its simplicity compared with many previous instruments. It is basically a television microscope (using an industrial type camera and monitor) combined with an electronic counter. The “sieve” is formed by a series of black horizontal lines on the scanning raster, produced by a pulse generator as a kind of coarse auxiliary raster. Only the particles on the microscope slide which appear between these lines are counted. Since the magnification of the optical/television system is known, the spaces between the lines represent known distances on the microscope slide. Particles of a certain size can therefore be selected for counting simply by adjusting the microscope so that the images of the particles on the monitor screen just fall between the black lines. The video signal from the camera is applied to the counter through a gating valve, which is normally “closed” but is “opened” by pulses from the generator producing the coarse auxiliary scan. Thus, only the video signal pulses representing the particles between the black lines can pass through to actuate the counter.

Moon Surface Study by radar is being undertaken jointly by the Radio Astronomy Group of the Royal Radar Establishment, Malvern, and the Electrical Engineering Research Laboratory of the University of Texas. Recently, radar pulses of 10-cm wavelength and 5 μ sec duration were transmitted to the moon from the 45-ft radio telescope at Malvern, using a power of 2 megawatts and a repetition frequency of 250 p.p.s. The reflected signals were received both at Malvern and in Texas. Comparisons between the two sets of signals received are expected to give information about the moon's surface and its suitability as a reflector for long-distance transmission of sound and television signals.

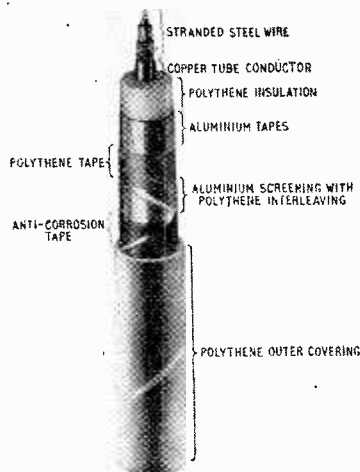

Hum, Rumble and Noise

By R. E. COOKE* B.Sc. (Eng.)

IN the development of high-quality sound reproduction, almost as much effort has been expended on the suppression of background noise as on the reduction of distortion and the extension of frequency range. There is no greater bar to realism than the irritating hiss of surface noise or a diverting low-frequency background of hum and rumble. Furthermore, these troubles are exposed more readily by wide-range equipment: as P. P. Eckersley put it many years ago: "The wider you open the window, the more the dirt blows in".

The Disease.—Disc stereo adds to the problem for the following reasons:—

(a) Two-channel working involves more wiring and connections, with increased liability to hum pick-up and earth loops.

(b) Stereo pickups of the moving coil and variable reluctance types generally give less output than their mono equivalents and thus require higher amplification which increases the liability to hum and noise. Crystal and ceramic pickups are less prone to hum trouble because of their higher output and non-inductive construction.

(c) Stereo pickups respond to vertical as well as to lateral vibrations. Turntables which are quite satisfactory for some working may be unacceptable for stereo, especially if the frequency of vertical rumble coincides with a low-frequency vertical resonance in the pickup.

(d) Although not strictly a noise problem, the increased freedom of stereo pickups plus greater amplification intensifies the risk of mechanical feedback. When this occurs, over-emphasis of the bass will result, with strong coloration at the frequency of feedback.

Diagnosis and Cure.—The following suggestions will help to avoid major pitfalls; but in difficult cases it may be necessary to call in an expert, as it is impossible to cover all the combinations of factors which can cause high background noise. Nor is it possible to diagnose the trouble by letter. The only satisfactory procedure is to investigate the installation *in situ*. Removing all or part of the equipment to a workshop for servicing may preclude a proper diagnosis.

Hum may be induced in the pickup head itself or in the wiring to the amplifier input. Efforts to reduce hum, therefore, take two general courses. One is to reduce as much as possible the stray alternating magnetic fields which surround the pickup and associated leads. The other is to arrange the wiring to minimize hum induction by inevitable residual stray fields.

The turntable motor itself is often a major source

of trouble because it is situated very close to the pickup and input leads. For quiet background, the motor should have a very low stray field; but few manufacturers quote measurements which would enable an intending purchaser to assess the position. Designing for low stray field is a question for the manufacturer, as little can be done afterwards to improve matters. Points of good design are the use of high-grade motor field laminations giving low working flux density in the core, and thick iron motor casings to act as magnetic screens.

Very small motors may be shielded by wrapping with Mumetal tape; but the high cost of this material precludes its general use with larger types. In a typical case, using a high-quality variable-reluctance pickup which is particularly prone to hum pick-up, the hum level fell by 12 dB when used with one high-grade transcription turntable, compared with another turntable of similar mechanical quality. This striking improvement was due simply to the much lower stray

field. With some motors in which working flux density is very high there is a tendency to produce excessive stray field when the supply voltage is near the upper limit, due to magnetic saturation. A useful reduction in hum is often possible if the voltage is reduced at the motor terminals by means of a series dropping resistor. In a typical case with the motor operating from 240 V, 50 c/s, hum was reduced by 2 dB after inserting a series resistor of 500 ohms, 5 watts rating, which cut the voltage down to 200 V. Other motors may show an even bigger hum reduction after dropping the terminal voltage. The variation of stray field intensity with mains supply voltage may also explain the increase in hum at certain times of the day when the mains voltage rises. This generally occurs in the evenings and at weekends (due to the drop in industrial consumption of electricity, including one Saturday afternoon in particular, during a demonstration in the Royal Festival Hall).

The mains transformer of the power amplifier is also a prolific source of hum, with a surprisingly large field of radiation. When assembling equipment in a cabinet, the power amplifiers and any other mains transformers should be located as far away as possible from the pickup and input wiring. It should also be remembered that magnetic fields are "directional" and some reduction in hum is often possible by arranging the amplifiers at certain angles. The best position can be found only by trial and error. When testing for hum, the pickup should be swung back and forth through its playing arc, *close to the turntable*, because the hum level can vary with posi-

* Wharfedale Wireless Works, Ltd.

MINIMIZING THE RESIDUAL
BACKGROUND IN HIGH-
QUALITY SOUND EQUIPMENT

tion by as much as 6 dB. In a stereo installation, each channel should be tested separately to avoid being misled by possible acoustical phase cancellation at the listening position. The hum will rarely be found equal in both channels.

To minimize hum induction the leads between pickup and amplifier should be as short as possible and kept clear of motors and mains transformers. Screened cable is essential for all except moving-coil pickups of very low impedance, and the leads for the two channels should be strapped together to avoid hum loops. If it is necessary to extend the leads provided by the pickup manufacturer, the joints should be soldered and insulated with good quality plastic tape. (Bituminous insulating tape is not reliable for this work.) The insulated joint should then be wrapped with tinned copper wire to act as a screen, and this should be soldered to the earthy braid on both sides of the joint. If intermediate plugs and sockets are required, as for example in demonstration equipment, these should be good quality shielded types, and must be placed as close together as possible.

The relative amounts of hum induced in the pickup itself and the input leads can be assessed by removing the pickup head and shorting together all the connections in the arm, using a *very short* length of thick wire. The residual hum is that due to the wiring alone.

Hum Bucking.—Where it is impossible to rearrange the equipment to eradicate hum, some improvement may be effected by using a hum bucking coil. A simple method is to bend a section of the pickup input lead in the form of a loop about 2in in diameter. This should be brought close to the mains transformer of the amplifier and its position adjusted to give minimum hum while playing a record.

This arrangement deliberately injects a small voltage at mains frequency into the amplifier input in series with the signal. The magnitude and phase of this voltage are then adjusted by altering the position of the loop in the stray field from the transformer until maximum cancellation occurs.

It has already been pointed out that the hum in both channels is rarely equal, either in magnitude or phase. Furthermore, the hum signal varies with pickup position so that a hum bucking coil cannot produce a complete cure. It is always necessary ultimately to remove the cause of hum at its source.

Earthing.—Whereas with mono equipment it is frequently possible to dispense with an earth connection and still retain a satisfactory hum level, it is usually essential to earth stereo equipment. Earthing should be carried out at one point only, usually at the amplifier. All the other equipment, such as turntable and tuner unit, should be earthed via the screened leads which run to the amplifier input sockets.

As an example of the improvement which may be expected by careful attention to these various details, the peak signal to hum level of a typical installation using a hum-sensitive, variable-reluctance pickup, was initially 32 dB. Rearranging the wiring increased this to 35 dB, and changing the turntable motor for one with a lower stray field produced a final figure of 47 dB. Disconnecting the mains lead from the motor brought the signal to hum ratio up to 54 dB, indicating that further improvement was still possible; but for practical

purposes a figure in excess of 45 dB is adequate. **Rumble.**—It has already been explained that the vertical sensitivity of a stereo pickup increases its tendency to expose turntable rumble, and that the coincidence of pickup resonances with certain rumble frequencies can also intensify the effect. It is therefore difficult to estimate precisely how much rumble will be obtained from any combination of turntable and pickup, especially as wide variations can occur between examples of the same models.

The method of mounting the turntable can affect the rumble content. It is usual to "float" the turntable mounting board on four corner springs in order to reduce mechanical feedback, and to isolate the pickup from external vibration. Unfortunately this sometimes allows resonances to build up in the mounting board, and rumble may often be reduced as much as 8 dB by clamping down the motor board firmly. The improvement is due to the added mass of the cabinet which is coupled up to the motor board by clamping the suspension springs.

It is unfortunate that a spring-loaded turntable which is useful in avoiding mechanical (acoustic) feedback may be bad for rumble. (What you gain on the springs you lose on the roundabout.)

Pickups having a pronounced low-frequency vertical resonance may be shock-excited when the stylus is lowered abruptly on to the record. The use of a pickup lowering device is useful in minimizing the shock as well as in safeguarding the delicate pickup mechanism. Such a device is in fact essential in professional work where the record has to be "faded up" at a precise point.



Mechanical Feedback.—This fault is caused by mechanical transmission between loudspeaker and pickup. The cure is to reduce this coupling as much as possible. The turntable should be placed well away from the loudspeaker and mounted on springs. It is also beneficial to stand the loudspeaker on a thick pad of foam rubber or rubberized hair so as to isolate it from the floor. It is usually possible to find a strategic position for the turntable, giving minimum feedback. This may often be near a fireplace where the floor boards are firmly braced, or on a section of floor which is not coupled directly to the loudspeaker through common joists. Moving the loudspeaker might also make a big difference.

Vibration.—All modern, high-grade pickups which operate with very low playing weight are liable to reproduce random vibratory disturbances such as those caused by walking across insecure floorboards. This trouble is even worse with stereo pickups because of their two-dimensional sensitivity.

As with mechanical feedback trouble, some improvement is obtained by spring mounting the motor board; but if the centre of gravity of the turntable/pickup assembly is not located immediately below its geometric centre, the motor board will oscillate about the centre of gravity with a rotary motion.

This condition can produce spurious noises, and in bad cases cause loss of tracking or even groove jumping. A method of improvement suggested by R. L. West and described in the September issue of *Wireless World* consists of adding weights to the motor board in strategic positions to bring the centre of gravity under the geometric centre. This can be done experimentally by freely suspending the motor board from each pair of diagonally opposite corners

(Continued on page 455)

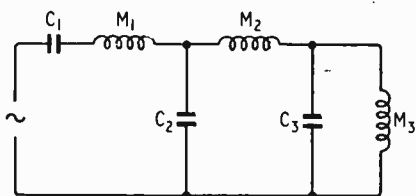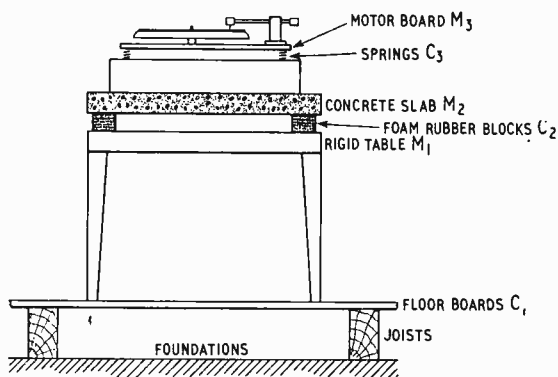

Method of isolating turntable from floor vibration, with (below) the equivalent electrical analogue circuit.

in turn and adding weights, until the board balances horizontally. After returning the motor board to its spring mountings, any transmitted vibration will then cause only vertical oscillations and consequently less disturbance of the pickup. As a bonus, the added weight will lower the resonance frequency of the turntable on its springs, giving improved isolation.

When giving demonstrations in large halls, more

stringent precautions may be required. Two thousand souls shuffling about on a wooden floor can play havoc with a delicately poised pickup. An effective remedy is to use a two-stage vibration filter as shown in the accompanying diagram.

Such an arrangement is rather complicated for general use, but the lesson it teaches may be applied to domestic installations if the need arises.

Noise.—It is surprising how often people accuse loudspeakers of producing hiss when they should really be investigating their amplifiers. There is always a certain amount of valve noise from any amplifier, but with modern high-quality types this should only be apparent as a faint hiss with the ear about one foot from the h.f. loudspeaker and the controls at normal settings. If the hiss becomes obtrusive it is usually a sign of trouble: perhaps a faulty valve or incorrect installation.

When testing for valve noise, the pickup should be left off the record, as many pressings have a high level of background hiss. The same applies to pre-recorded tapes.

Conclusion.—It seems obvious that the advent of stereo on disc is going to demand improved standards of performance from turntables, as did the transition from standard 78s to l.p.s a few years ago. It must be admitted that rumble is not produced exclusively by turntables. Records themselves sometimes contain rumble as well as other low-frequency background noises; but the best discs are still superior to the average transcription turntable in this respect. Some U.S. manufacturers are already reverting to belt-driven turntables which offer some reduction in rumble at the expense of increased complexity where speed variation or adjustment is required. Only time will produce the most satisfactory and economical solution.

BOOKS RECEIVED

Oszillatoren mit Schwingkristallen, by Werner Herzog. General treatise on piezoelectric oscillators and their associated valve and crystal circuits—including some reference to crystal and atomic clocks. Pp. 317; Figs. 284. Price DM45. Springer-Verlag, Heidelberger Platz 3, Berlin-Wilmersdorf.

Servicing Transistor Radios, by Leonard D'Airo. Transistor fundamentals, servicing techniques, and descriptions of various types of transistor circuits. Includes data on the principal American transistor types. Pp. 224; Figs. 215. Price \$2.90. Gernsback Library Inc., 154 West 14th Street, New York, 11.

Elementare Einführung in die Bessel-Neumann-und Hankel-Funktionen, by Walther Rehwald. Elementary treatise on Bessel, Neumann and Hankel functions with numerous examples of their application in physics and technology. Pp. 46; Figs. 19. Price DM 6.30. S. Hirzel Verlag, Birkenwaldstrasse 185, Stuttgart N, West Germany.

R.S.G.B. Amateur Radio Call Book. 1959 edition of call signs of licensed amateurs in the United Kingdom and Eire. Includes lists of prefixes of all countries of the world. Pp. 64. Price 3s 6d. Radio Society of Great Britain, New Ruskin House, Little Russell Street, London, W.C.1.

A Guide to Amateur Radio. Seventh edition of the R.S.G.B. handbook for newcomers to the hobby of

amateur radio. Choice of equipment, hints on operating, licensing examinations, etc. Pp. 72; Figs. 38. Price 3s 6d. Radio Society of Great Britain, New Ruskin House, Little Russell Street, London, W.C.1.

The Radio Amateur Operator's Handbook. Fifth revised edition of data book compiled in collaboration with the International Short Wave League. Pp. 48, illustrated. Price 3s 6d. Data Publications, Ltd., 57 Maida Vale, London, W.9.

Spotlight on B.B.C. Television. Guide for viewers on how television works and how to get the best results from a television receiver. Pp. 23, illustrated. Price 9d. B.B.C. Publications (Spotlight), 35 Marylebone High Street, London, W.1.

Audio Measurements, by Norman H. Crowhurst. Describes test instruments and basic methods of measuring the performance of amplifiers, pickups and arms, turntables, tape recorders and microphones. Pp. 223, Figs. 1029. Price \$2.90. Gernsback Publications Inc., 154 West 14th Street, New York, 11.

Television Engineers' Pocket Book. Edited by J. P. Hawker. Second edition now includes information relevant to Band III as well as Band I receivers and methods of testing. Pp. 252; Figs. 144. Price 12s 6d. George Newnes, Ltd., Southampton Street, London, W.C.2.

Paris Radio Show

IMPRESSIONS AND COMPARISONS

ALTHOUGH the French radio show was somewhat smaller than our own, it was every bit as crowded and hot. In general too, similar kinds of exhibitors were present—non-manufacturers included Radio-diffusion Television Francaise and many journals.

As regards quality, there seems to be rather more treble and less bass in Haut Fidélité than our own home-grown variety. Television pictures although better, did not seem to us to be 819/405 times as good as our own. Television—Development seems in general to be held up pending the arrival of 110° sets. These should not be long in coming however, since 110° c.r.t.s and components have already been shown at other exhibitions.

The uncertainty about a possible second TV programme seems to have been somewhat clarified by the planning of experimental transmissions in Channel 12 and the u.h.f. Bands IV and V. A few sets which will be able to receive these transmissions were already on show—u.h.f. front ends are fitted to some Grandin receivers and Channel 12 is receivable on some Pathe Marconi (La Voix de son Maitre) models.

Mains transportable sets seem to be very scarce in France—we noticed only a very small (9-in) one shown by Tele Portable (Paris-Auto-Radio).

In certain parts of France reception of television programmes from other countries is possible. However, since these programmes have different characteristics, multi-standard sets have to be provided to receive them. Among the numbers of such receivers on show we saw one, the Telemaster Super V5D FM, which could receive as many as five types of television transmissions—819 lines on French and Belgian standards, 625 lines on Belgian and European standards and even our own familiar 405 lines—not to mention f.m. sound broadcasts in Band II. Two simultaneous different language sound transmissions are used in French TV broadcasts to North Africa, so that in the Clarville Videomatic Special VS43 we find a socket for a “décodeur bilingue”—a piece of equipment we would have found very useful ourselves. (For further details of the transmissions and a simple decoding system see the *Technical Notebook* section of our February and March 1957 issues.)

Strong emphasis is placed on automatic controls in French sets. Although on investigation these usually only turned out to be the familiar vision and sound a.g.c., for example, we did note in Grandin and Point Bleu (Blaupunkt in Germany) receivers the use of a photoelectric cell to automatically adjust the contrast to suit the amount of ambient light.

This emphasis on automation also appears in the common availability in France of remote control units for the contrast, brightness, volume and on/off switch.

Provision for adding facilities such as flywheel sync, vision or sound impulsive noise limiters and pre-amplifiers is another common feature of French sets seldom found in England.

Also frequently found in French receivers is a control for modifying the vision bandwidth and/or frequency response to suit different types of transmission (studio, film or outside broadcasts for example) or different reception conditions.

Quotation of the vision bandwidth is also very common in France. 9Mc/s was the usual figure given but 10Mc/s was also quite often quoted. Another often-quoted useful figure was the receiver sensitivity, together with the conditions under which it was measured.

A pair of speakers placed one in each side of the cabinet so as to broaden the apparent sound source is another common feature of French television receivers.

A compact type of combined model not seen in

England but shown in France on the Grammont, Minerva-Radio and Phenix stands is a table television receiver with a record player above it and a radio below.

An unusual feature of some Grammont receivers is a neon tube placed round the screen edge so as to give a “douce et reposante” (soft and restful) surround without any reflection from the screen itself. A reflecting surround and the light from the screen itself was used to produce a similar effect in Pathe Marconi receivers for example.

Problems in television receivers due to mains voltage fluctuations seem to be much more serious in France than in England, since three exhibitors specialized in mains stabilizing units. These problems mainly arise because the fluctuations themselves, being sometimes as much as 50V in 120 or 220V, are much greater in France; but we also formed the impression that French receivers are somewhat more sensitive to this type of disturbance. Stabilization in such units was usually obtained by means of a saturating iron core system, the harmonics in the supply frequency produced by this stabilizing system being reduced by means of a filter. Inbuilt stabilization against mains voltage changes was specifically claimed for Schneider receivers for example.

Stereo.—Although this was apparently the first public showing of stereo in France, this was not, perhaps fortunately for the French, being pushed nearly so hard as it was last year in England. For example, manufacturers seldom felt it essential to provide hastily constructed adaptors for all their mono equipment.

Although examples were seen of nearly all the loudspeaker mounting arrangements used in English stereo—a long single cabinet was shown by Ribet-Desjardins, two separate cabinets by Clarville and separate column-shaped speakers by Supertone—it was the solution of a record reproducer with two detachable lid/baffles or a single split lid/baffle which was almost universally adopted by French manufacturers.

In connection with the usual limitation of the overall apparent sound field in single-cabinet stereo to the cabinet width it was depressing to note a stereo reproducer only 21in wide—9in less even than the narrowest we had previously seen in England.

Besides their stereo transmissions using two separate transmitters for the left and right channels, Radio-diffusion Television Francaise are also experimenting with a single transmitter f.m. Band II system in which the right-hand channel is carried on an a.m. sub-carrier spaced 70kc/s from the main carrier. Using close-spaced microphones, it was thought that stereophonic effects were mainly due to time rather than amplitude differences between the two channels, so that either channel by itself would provide a compatible programme.

Record Reproduction.—Removable lids containing the loudspeakers were also very popular in single-channel portable record reproducers. To reduce the depth taken up by the speaker, an inverted construction with the magnet inside the cone angle was quite often adopted.

A worth-while facility of relatively inexpensive record reproducers shown by Supertone, Radialva and Radiola was a pickup raising and lowering device for reducing the possibilities of damaging the record. Although such devices are not, of course, new to England, here they are generally seen only on the most expensive equipment.

An unusual feature of the Pathe Marconi 359 record reproducer is that both the bass and treble can be modified using a single control. According to which way the control is rotated, either bass or treble cut is produced,

High Fidelity.—The attention devoted to high-quality reproduction was much less in the French than the British Radio Show, for there was no French equivalent of our Audio Hall, few separate loudspeaker enclosures were shown and, except in the case of tape recorders, hardly any exhibitors showed only high-quality equipment without any “bread and butter” exhibits.

Two unusual features of the Supertone S9 loudspeaker are a cylindrical diffuser in the cone apex, and a rear-loading labyrinth enclosure whose cross-section decreases away from the loudspeaker.

The Raxon (shown by A.B.P.) consists of a record-cleaning bristle pad carried on a light arm so that it “plays” the record to clean it—a similar arrangement to an old familiar—“le Dust Bug”—shown by Hi-Fa.

Tape Recording.—We could see little evidence in France of the recent English trend towards providing a response up to the highest audio frequencies at a tape speed as slow as $3\frac{1}{2}$ in/sec rather than, as formerly, only at $7\frac{1}{2}$ in/sec. This is perhaps surprising as this improvement was first made possible in England by means of heads of Continental origin.

The erase/bias frequency does not seem to be nearly so standardized in France as it is in England—we noted the high value of 100kc/s in the Teca Plain Chant and the low value of 40kc/s in Seravox recorders.

Other unusual tape recorder features noted were separate bass and treble amplifying chains in the Philips EL3524 and Radiola 9524 recorders, provision of as many as 4 speeds in the Melovox recorder, and stereo record as well as replay facilities in a Teca recorder.

A feature of “double-play” tape shown by Kodavox is that the magnetic particles are oriented in the same direction so as to provide an increased output at reduced distortion.

Sound Receivers.—There are several types of control which are more common in these in France than England. These include tone-compensated volume (“loudness”), variable selectivity and bandwidth short wave controls. Both continuous and switched long wave-band tuning is also often provided; the switched stations being France I and Radio Luxembourg’s French service. Also very popular in France are tone controls which are switched to correspond to the type of programme being reproduced. For example the Clarville Auditor gives treble boost for “orchestre”, bass and treble cut for “solo”, bass and treble boost for “jazz”, and middle-frequency boost for “parole”.

Oriental aerial coils are often provided as in England,

but these are often air- rather than ferrite-cored. On the other hand, ferrite loudspeaker magnets are more common than in England.

A most unusual type of equipment shown by Radio-Celard consists of a combined decorative frame aerial and r.f. pre-amplifying stage designed to feed into an ordinary receiver. Examples were shown which were decorated to resemble pictures, globes and clocks.

Styling in French radio receivers often seems to include—we think successfully—asymmetrical elements. For example, the tuning scale may consist of a quadrilateral with two parallel and two non-parallel sides.

Useful facilities in valve car radios shown by Arel and Philips were automatic station searching and tuning with choice of minimum sensitivities below which no stations were selected.

Transistorized Models.—Record players and receivers were very common, more so than in England. In spite of this, transistorized radio-grams were rare—we noted only models shown by Grammont, Phenix and Radio-Celard.


Although we saw relatively few miniature transistor sets, and push-pull output stages were general, the latest English extension of this trend towards improved audio quality—loudspeakers and cabinets corresponding in size to ordinary valve table receivers—did not seem to be in evidence in France.

On the other hand, while in England extension to the shorter wavebands is only just beginning in transistor sets, in France such wavebands are very commonly provided even down to 16 metres, though often only to 46 metres. Even v.h.f./f.m. Band II transmissions can be received by the L.M.T. model T400. Telescopic aerials are generally provided for such short waves.

The English trend of making transistor receivers suitable for use in cars by providing a car aerial socket has also been extended further in France. In one arrangement shown by Ducretet-Thomson, Grammont and Pizon for example, the basic receiver unit can be removed from its normal cabinet for more convenient fitting in a compartment on the car dashboard. Arrangements were also often made to increase the receiver output in the car to allow for the increased ambient noise. In the Pizon receiver this increased output results simply from the greater current capacity of the car battery, while in other models shown by Firvox, Oceanic and Radio-Celard for example an extra several-watt transistor power output stage and larger speaker are provided in the car.

SHORT-WAVE CONDITIONS

Prediction for October

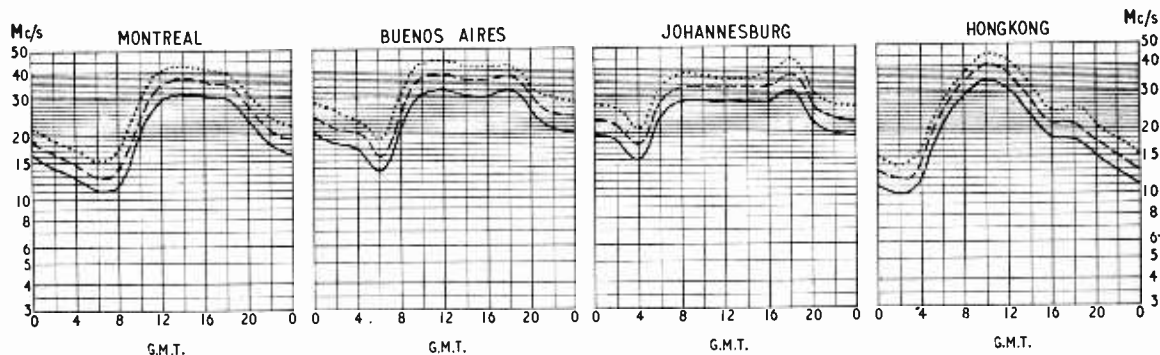

THE full-line curves indicate the highest frequencies likely to be usable at any time of the day or night for reliable communications over four long-distance paths from this country during October.

Broken-line curves give the highest frequencies that will sustain a partial service throughout the same period.

- FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE FOR 25% OF THE TOTAL TIME
- PREDICTED MEDIAN STANDARD MAXIMUM USABLE FREQUENCY
- FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE ON ALL UNDISTURBED DAYS

FERROELECTRICS

3.—THE DIELECTRIC AMPLIFIER AND SOME COMPUTER APPLICATIONS

By J. C. BURFOOT*, Ph.D.

(Concluded from July/August issue)

THE previous articles showed that a prominent mark of a ferroelectric is its strong non-linearity; the polarization P , instead of varying in proportion to the applied voltage V , rises very rapidly at a certain value and then levels off to a saturation value. For a small h.f. signal superimposed on V , the high dielectric constant ϵ , instead of remaining constant, falls off as saturation is approached; the high value and the non-linearity are most marked for temperatures in a range above and below the transition temperature T_0 , and it was shown how this temperature can be adjusted to be convenient by a suitable choice of material. Above T_0 , P shows no hysteresis loop, and so no hysteresis losses. Antiferroelectrics, such as some of the zirconates, show the dielectric anomalies without any hysteresis.

The change of a ferroelectric capacitance with temperature has been used for remote thermometry, while its change with bias V has been used for

The dielectric amplifier is analogous. With ferroelectrics the control is a voltage V_c which polarizes a piece of the chosen material, forming the dielectric of a capacitor C . The a.c. dielectric constant ϵ falls when the control voltage rises, i.e. C falls, and the rising impedance controls an alternating supply (Fig. 13), which may be an r.f. power supply, in a manner like that of the magnetic amplifier. The output may be demodulated if appropriate.

The supplies to both instruments are simple, there are no heaters, and other advantages over conventional amplifiers are simplicity, ruggedness, and cheapness. The dielectric amplifier may be cheaper than the magnetic amplifier, and it extends to a higher frequency range. It gives a mean power gain, and will respond to a d.c. control if required. Certain questions of temperature stability will probably be solved in time.

The magnetic amplifier attracted attention in the 1940s and was successfully applied to automatic control and measurement, in analogue computers and servos, and for supply stabilizing. The dielectric amplifier is younger. Potentially its applications are the same but it embraces also amplification at audio frequencies since there are no iron-loss limits, and it can work from a high-impedance control source; there may be places where magnetic and dielectric amplifiers can be used together, since the supplies may be similar. It has uses wherever a.f. amplification is needed, with pickups, for d.c. amplification, and in any electronic systems where modulation is an appropriate way of conveying a signal, and wherever power amplification of a small actuation is needed to operate a device, from transducers, in servo and relay systems, for stabilizers, remote controls, and thermostats.

The ferroelectric used has been sometimes ceramic and sometimes crystal, and the temperature used is sometimes below T_0 and sometimes above T_0 ; in practice it is the material which is selected, rather than the temperature. Various zirconates have been used, and barium strontium titanate. The hysteresis loop is not needed, and to some extent can be ignored; it is only the non-linearity that matters. So the primary reason for working above T_0 is to avoid the losses represented by the loop area; the large piezoelectric effects below T_0 also cause troubles. But because of the nature of the curves, better temperature stability can be got below T_0 . In either case the working temperature used is close to T_0 because there the rate of change of ϵ with control voltage is high, giving high gain. This rate of change depends not only on the temperature but also on the mean control voltage (Fig. 14(b)) so this will need to be suitably chosen. Thus the control voltage V_c is usually a static bias voltage and a signal (e.g. audio frequencies ω_c) (Fig. 13(b)), so that the gain referred to the a.f. depends on the bias, which is chosen to give the highest gain, subject to other specifications being

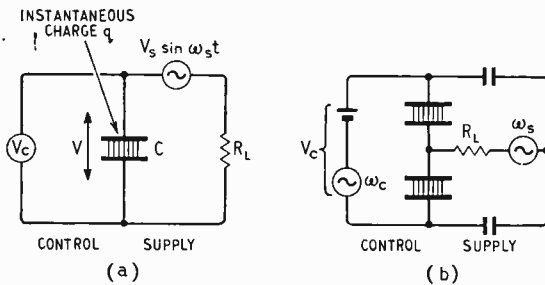


Fig. 13. Dielectric amplifiers

tuning in a superhet, and also for frequency modulation.

Dielectric Amplifiers.—The dielectric amplifier is a device which may be compared with the well-known magnetic amplifier; both are power amplifiers working well at low frequencies. It uses non-linear dielectrics, including ferroelectrics because they are strongly non-linear. In the magnetic amplifier a relatively slowly varying controlling current in a coil is used to magnetize the core to a greater or less extent. When the current is high, the core approaches magnetic saturation and its permeability falls so that the inductance L of the coil falls. This falling impedance causes an increase in an alternating supply-current (sent independently through the coil) in sympathy with the control. In practice, the supply-current may flow in a separate coil on the same core; as its amplitude rises and falls in a more or less faithful reproduction of the control, it is thus deeply modulated to correspond to the control. The only supply required is the alternating current, and possibly a steady current to bias the core suitably.

*Queen Mary College, London University.

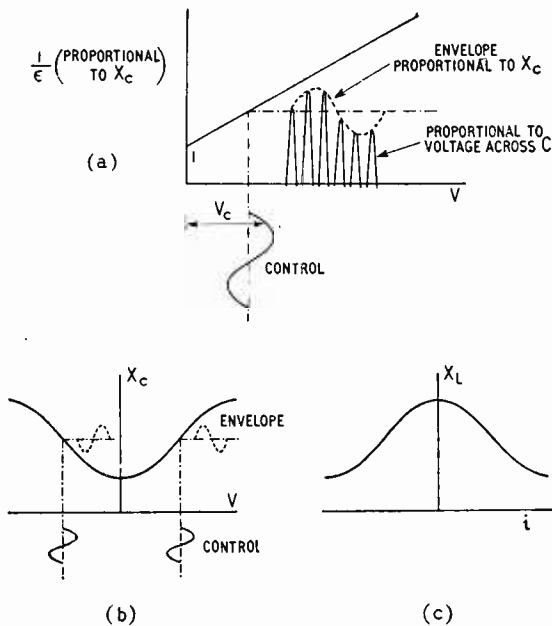


Fig. 14. (a) Simplified analysis: For large R_L , voltage across C in Fig. 13(a) is $X_c \frac{V_s \sin \omega_s t}{R_L}$ where $X_c = \frac{d}{\omega_s A \epsilon}$ (see Fig. 15). (b) More realistic curves. (c) Magnetic amplifier coil impedance curve.

also met. The rate of change of ϵ with V_c is higher for single crystal material, but this is probably more expensive to produce. Notice that if instead of $\omega_c < \omega_s$ we replace the a.f. by a "pump" at twice the supply frequency, we find we have returned to "Cathode Ray's" analysis of Mavars in the May issue.

The ϵ depends on temperature, mean voltage, and frequency. Operation is stable only if the temperature is constant. If voltage swings used are large enough to traverse the loop, the heating caused by the loop loss will make temperature stability difficult; the effect increases with and is proportional to the frequency. Circuit analysis is done assuming constant T and, often, implicitly assuming ϵ does not change with frequency. This assumption will also serve us here; it will let us examine the basic ideas in a simpler form than would a full analysis. For suppose the P-E curve

of the ferroelectric were $P = \frac{1}{a} \log(1+aE)$ for positive E, a representation adopted here merely for simplicity. Then ϵ , measured by a small signal of relatively low frequency, at the biased point B (Fig. 15), is the slope of the curve, $\epsilon = 1/(1+aE)$, and the assumption of frequency independence allows us to use this also for ϵ at higher frequencies. Then Fig. 14(a) shows how X_c , the impedance at supply frequency of the ferroelectric capacitor, could be used to give an output. In practice, the impedance varies a current. The sensitivity limit is set by noise due to the domain movements.

Notice that Fig. 14(a) does show the non-linearity; if there were none this line would be horizontal. But it is an idealized version of a curve shown more realistically in Fig. 14(b), which may be compared with the coil-impedance curve in the

magnetic amplifier, Fig. 14(c). A single stage can be used with or without phase inversion, depending on the polarity of bias chosen. It is possible to provide the bias by feedback from the output in suitable cases. With zero bias, frequency doubling of the envelope would occur.

Analysis.—Circuit theory falls as usual into two parts: (1) the construction of the differential equation describing the circuit, and (2) finding the solution of the equation. When the circuits are non-linear, the differential equation is non-linear, and usually cannot be solved exactly. What is more, the equation itself is usually not an exact description of the circuit, because it depends on some mathematical representation of the non-linear curve (the valve or transistor characteristic, the core saturation characteristic, or the P-E curve of the ferroelectric); the representation is chosen to be a good fit to the experimental curve, subject to its giving an equation we can solve. The solution of the equation can then be given as an expression for the output current or voltage in terms of the circuit values and the supplies and frequencies. The way we choose to approximate to (2) depends to some extent on the representation chosen for (1). But the first step is usually to replace the non-linear curve of Fig. 15 by the dashed line. Notice first that in drawing this figure we are ignoring the hysteresis loop if we are working below T_0 , and that further the dashed line is a good approximation only when V_c is near zero (a zero bias plus a sufficiently tiny signal).

For example, to the simple circuit of Fig. 13(a) add a resistor R associated with the control V_c . Consider first that V_c is bias only; later this type of analysis will very readily serve for the more general case of bias plus a.f., provided that ω_c is much lower than ω_s . The governing equation can readily be found in terms of q and V:

$$\frac{dq}{dt} + \frac{V}{R^1} = \frac{V_c}{R} - \frac{V_s \sin \omega_s t}{R^1}$$

R^1 is the parallel combination of R and R_L . Into this equation substitute the chosen representation of the curve of the ferroelectric, that is V as a function of q. The first approximation is the ordinary linear equation got by substituting q/C for V (C here corresponds to the dashed slope), giving the steady state solution:

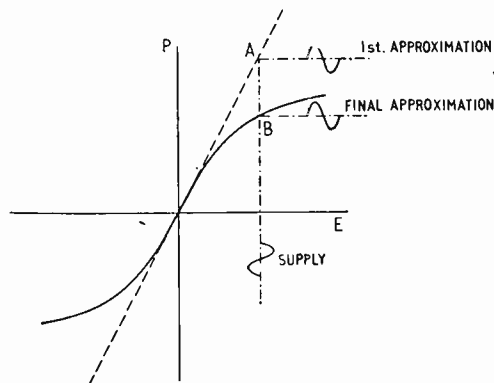


Fig. 15. The non-linearity. The $q-V$ relation needed in the analysis is a scaled version of this figure, with $q = PA$, $V = Ed$, where q, A, d are respectively instantaneous charge, area, and thickness, of the ferroelectric capacitor C

$$q = \frac{V_c}{R} \frac{V_s \sin \omega_s t - \phi}{R_L \sqrt{1 + \omega_s^2 \tau^2}}$$

with $\tau \equiv R'C$, $\tan \phi \equiv \omega_s \tau$. The term $\frac{\tau V_c}{R}$ is the mean


charge on the ferroelectric capacitor due to V_c , and corresponds to point A in Fig. 15. The whole expression gives the supply waveform marked "first approximation" in that figure. If we project that waveform into the one marked "supply", using the dashed line, and back into "final approximation," using the curve, we are graphically simulating what the second and succeeding mathematical approximations must do. Each stage of approximation is used in getting the next, though the manner in which this is done depends on the method chosen. Finally the current comes from differentiating q .

It has already been pointed out that this form of analysis, in which l.f. and h.f. relations are represented in the same q - V curve, is using an unwarranted assumption of frequency independence. For better analysis, the h.f. curve may be obtained for any given ω_s by measuring the ferroelectric capacity at ω_s under varying bias V . Each point on the curve is then given by

$$q = \int_0^V C dV.$$

A capacitor C_B inserted in the supply branch of Fig. 13(a) prevents R_L from reducing the bias applied to the ferroelectric from the control branch V_c , and a suitable inductance in the V_c branch keeps the supply frequency out of the control circuit. But the inductance may not be needed if two ferroelectric capacitors are used as in Fig. 13(b), for now no component of ω_s (or its odd harmonics) appears across V_c . The gain is less. The power gain falls off steeply as the control frequency rises, but may be increased by using a higher ω_s .

The voltage gain is less than one; in fact it is clear that the fractional variations in output current cannot exceed those in $1/X_c$, so in ϵ (Fig. 14). So there is interest in the resonant amplifier. One form of this may be derived by tuning the capacitor C_B mentioned above; this is practicable only if the temperature stability is good. Let us write C' for the value of the ferroelectric capacitance C at resonance, and C_T for the series combination of C' and C_B . With a series tuning inductance L_T in the supply branch, the resonance condition is $\omega_s L_T = 1/\omega_s C_T$ for a small enough supply voltage. The modulations in the supply output may now be thought of as due to the audio control-variations, which swing it off tune. It has been shown† that



†A.I.E.E. *Trans.*, Pt. I, 12, 68, 1953. G. W. Penney, J. R. Horsch, E. A. Sack.

Fig. 16. Detuning characteristic for a resonant dielectric amplifier† (see text)

the fractional variation in output supply-current amplitude is then multiplied by

$$\sqrt{1 + Q^2 \left(\frac{C_B}{C} \cdot \frac{C' - C}{C' + C_B} \right)^2}$$

where Q is $\frac{\omega_s L_T}{\text{loss resistance}}$, analogous to linear circuits

if the supply voltage across the ferroelectric is small; the loss resistance is the sum of the resistances associated with C_B and with L_T and with the ferroelectric. The reciprocal of this multiplier plotted against V_c falls off steeply from 1 as V_c is increased from zero, and has been called a detuning characteristic (Fig. 16). For the voltage amplifier, the bias will be adjusted to the point at which this curve has the greatest slope G . Output voltage may be taken from a demodulator across L_T .

Actually if the supply branch losses are not too great C_B can be made quite small without appreciably

altering $p = \frac{QC_B}{C' + C_B}$ in the above multiplier, because

Q increases to compensate the decrease; at $C_B =$

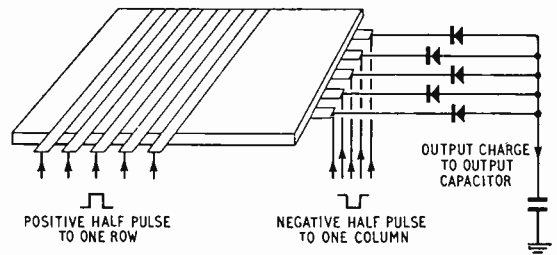


Fig. 17. Matrix electrodes on ferroelectrics

$C'/10$, G was only spoiled† by a factor of about 3 (Fig. 16). These small C_B values are of use in voltage amplifiers, in which the changes in the resonant voltages across L_T or C_B are made to exceed the control volt changes. For as C_B decreases, the resonant supply r.m.s. voltage v across the combination C and C_B (which equals that across L_T) increases in relation to the supply volts across C , so the changes across L_T increase. The voltage amplification is $\sqrt{2} Gv$. At $C_B = C'/10$, v had multiplied by 11, giving amplification about four times better than without tuning.

Working below T_0 , and using crystal material because the loops are steeper than in ceramics, supply frequencies up to a few megacycles are possible. Supply amplitudes which are not small compared with the saturation voltage for the crystal have been tried; in this case, the analysis of Fig. 14 is not valid. 12 dB power gain has been quoted, over a 7-kc/s band, using 1/10-mm electrodes on a barium titanate crystal. Very much larger gains have been quoted in bridge circuits. Heating and other factors set the frequency limit.

Computer applications.—Digital computers use a large variety of two-state devices and fast switches, built into the form of memories, registers, counters, selection gates, and so on. In the early days, the classic flip-flop circuit formed by a double triode was used for many of these, but there has been a continuing search for new devices which are cheaper,

(Continued on page 461)

faster, cooler, more robust, and more convenient.

J. R. Anderson suggested in 1952 that ferroelectrics with good square hysteresis loops might be used as stores ("memories"). Each cell of a store holds one binary digit (bit), whose two possible values or states are conventionally called "0" and "1". So the cell must be able to take up either of two states in response to the right one of two different stimuli ("writing") and it must be able, when "asked," to indicate which state it is in ("reading"). Nothing else is strictly necessary, so there is in principle an enormous number of possible storage devices. It is the extra requirements that determine which of these are developed and used.

If the states are permanent when the stimuli are absent, equipment for continual regeneration of the store contents will not be needed, as it is, for example, in the cathode-ray tube store. It is often convenient if the reading process is "non-destructive" of the stored value; it is not so, for example, in the simple form of ferrite store, so there must be circuitry to restore the previous contents of a cell by a "writing" process each time it is consulted. The enormous speed of modern digital computers means that the cell must respond very rapidly, say in a microsecond. It should be small, but one should examine the size of the cell *plus* an appropriate fraction of its circuitry. It should be cheap and this implies that the advantage would be with any cell which could be mass produced and did not need too elaborate circuitry. A cell costing threepence (with its circuitry) will give a store of 10,000 forty-bit words for £5,000.

The speed of a computer is not limited by the response time of the cell, but more often by the time taken to get access to the required cell. Which cell is needed, at each instant, is shown by its "address" number in a register somewhere in the computer. This register sets up switches to select the right cell, and this setting-up can take a relatively long time. It is here that square-loop devices such as ferrites and ferroelectrics come into the picture, for they can be used in a matrix store, where effectively part of the selecting is done in the cells themselves. It may save time if there is less external switching to be done. It will certainly need less external circuitry. For the cells are here arranged in a matrix of rows and columns in such a way that instead of one external selector for each cell, only one for each row and column is needed. In our £5,000 store, if the cells corresponding to, say, the 3rd bit of each "word"† are in a 100 × 100 matrix only 200 selectors are needed instead of 10,000 for the 3rd bit. If half the threepence was the cost of the selectors, all the selectors now cost only £50.

The principle of matrix selection is that the "read" impulse is halved in magnitude and applied at the same instant to the row and column crossing the required cell. That cell receives the sum of the halves. Only that cell gets an impulse of full magnitude and so responds by indicating what is its state; that is, it gives an output pulse. Most other cells get no impulse, but some others do get a half-size pulse. It is essential that the properties of the cell should be such that a half-size impulse has no effect, or, strictly, that any output resulting from it is small enough, or short enough, or slow enough to be easily distinguished from the

output due to a full-size impulse. This can be done with cells made of materials which have "square" hysteresis loops, such as ferroelectric barium titanate crystals or the analogous magnetic materials such as ferrites. But the requirement is very stringent, for two reasons: (i) the output is often received on a circuit which is common to all the cells, so it is the *sum* of, say, 198 unintended signals which must be negligible; (ii) production of the unintended signal by an unselected cell may also slightly alter the stored state of the cell, and a cell which is not intentionally consulted often must be able to withstand possibly many thousands of these half-size impulses without noticeably altering its state, unless we are prepared to provide regenerating circuitry. On this second count, at present, ferroelectrics do not appear satisfactory, and there is also an ageing effect which is not understood.

In ferrite stores, each cell is a tiny ring of the material. One of the "row" wires and one of the "column" wires passes through each ring. One "output" wire threads them all. Half-size current "reading" pulses are applied to the selected row and column wires. These add in the one selected ring, and reverse its magnetization; an induced current pulse will then appear on the output wire if that ring held a "1," say. By analogy, if a set of parallel "column" strip-electrodes is deposited on one face of a ferroelectric crystal, and "row" strips on the other face (Fig. 17) the square segment of material between one of each set constitutes a cell. The direction of the ferroelectric axis must be arranged to lie through the thickness of the crystal. Reversal of one cell does not affect its neighbours; there is no stray field. A half-size voltage pulse is applied to a row electrode and a negative half-pulse to a column. One cell is thus subjected to a full-size pulse. If it held a "1" say, its polarization is reversed and output charge appears (Fig. 18(a)) which can be used as a current pulse or as a voltage pulse on an output capacitor. An experimental matrix has been made in this laboratory with ½mm electrodes at about 800 cells per cm². The pulse generators must have sufficiently low imped-

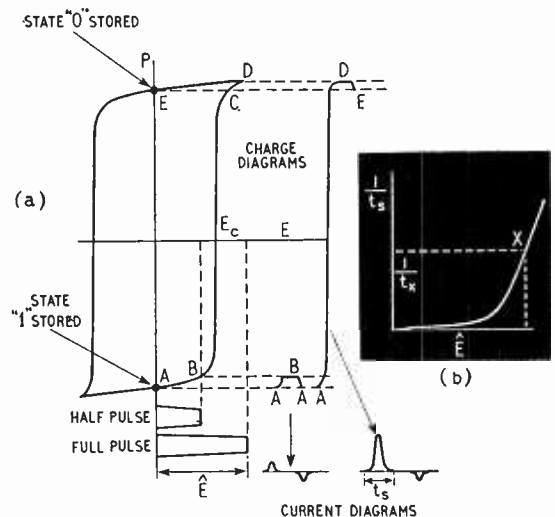


Fig. 18. (a) Polarization changes and currents resulting from a half-pulse (ABA) and a whole pulse (ABCDE) applied to a cell storing "1". \hat{E} and t_s are defined in this figure. (b) Speed of reversal for various pulse sizes

†Thirty to forty bits make up one "word," on which arithmetic operations are to be performed.

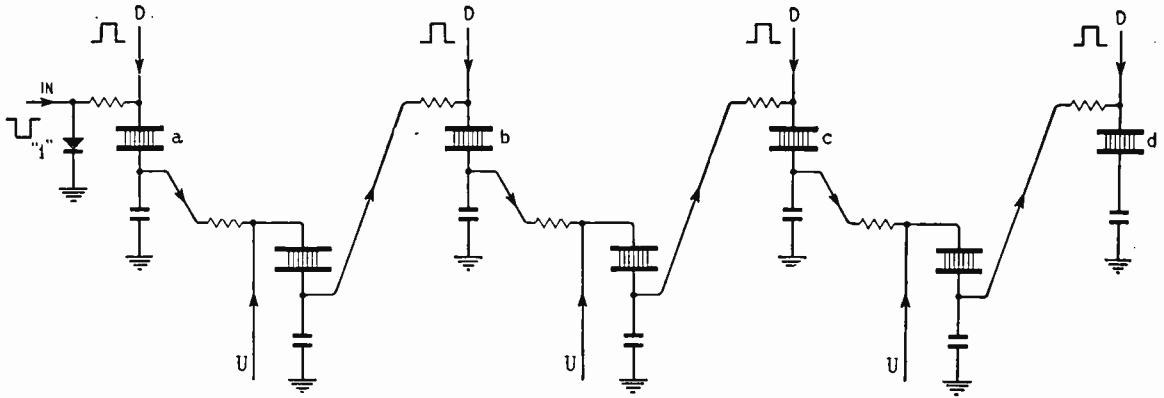


Fig. 19. A shifting register (schematic)

ances for speed; the reversal of 26 microcoulombs per cm^2 in, say, 10 microseconds using electrodes of area $1/10$ sq. mm releases a mean current of 5 milliamps. The loop area indicates a heating effect of about a milliwatt per cell at 10kc/s p.r.f., but it is not difficult to cool the crystals sufficiently.

A "square" loop is wanted for this application so that the different action of half and full pulses shall be sharply demarcated. The previous article showed why barium titanate crystals have a square loop at reasonable frequencies. The polarization is all in directions parallel or antiparallel to the external field through the crystal thickness, and there is apparently a greater barrier to the start of the reversal process than to later domain motions. **Matrix Speed.**—Now the loop of Fig. 18(a) was traced at a frequency appropriate to the intended application; it cannot show time effects. The reversal time depends on the magnitude \hat{E} of the reversing pulses as shown in Fig. 18(b). Their duration must be longer than this time. The decision to use matrix selection fixes the \hat{E} to be used; that is the full size of pulse cannot be greater than about $1\frac{1}{2} E_c$ (only 10 to 20 volts on $1/10$ -mm crystals). On Fig. 18(b), E_c is about where the elbow is, so the maximum speed is given at X. With the present materials it is not faster than about 10 microseconds. Escape from this limit must be either by abandoning the economy of matrix selection or by modifying the material so that the main slope of Fig. 18(b) is steeper. But if this reduces E_c in the same proportion nothing will have been gained.

Fig. 18(b) also demonstrates the point (ii). For fields less than E_c will overcome the activation barrier if given time. And though the figure shows it would take a very long time (say $50,000 t_a$) for a half-size field to reverse barium titanate, it has been found that the process is cumulative, so that a large number of the computer half-pulses will eventually cause complete reversal. Modified forms of matrix reduce the problem.

Other Devices.—So at present the need for occasional regeneration offsets the advantages of compactness, easy construction, and voltage operation. It may be that the future for barium titanate lies rather in shifting registers and counters, which are not subject to the matrix speed limitation. With a small output capacitor, the output voltage from one cell can drive another directly. Now a string of "0s" (say, positive pulses) written into the one

cell gives no output until after a "1" has been slipped into the sequence, because no reversal occurs. Then if it can be arranged that the output corresponds to a "1," it can be propagated down a line of cells, as in a shifting register. Because the output from a reversed ferroelectric cell has the same polarity as the input this means the sign convention must be changed between successive cells. In Fig. 19 a "shift" operation consists of writing "0s" first into all the upper cells at DDD and then into the lower at UUU. If an input bit "1" has been written into the cell *a* in advance, the shift moves it into *b*, and so on. If we adopt for cells *a*, *b*, *c*, . . . the same sign convention as in Fig. 18(a) (positive pulse writes "0") the opposite convention is needed for the lower cells, so the shift pulses *U* are negative. So the unit operation takes three time intervals; input of "1" or "0" at *a*, shift down, shift up.

Such registers have been built using barium titanate crystals and with transistor drives. Ceramics have also been used, even for stores, and methods for non-destructive reading of stores have been tried. One of these uses the alternating signal generated piezoelectrically when a cell is vibrated by ultrasonics. The loop need not be square for reading. The piezoelectric coefficient changes sign with *P* (see previous article) so this output has an opposite phase according to the direction of polarization; very fast operation does not seem possible. Another computer use for ferroelectrics is in the form of bistable elements called ferroelectric resonant pairs, by analogy with the older "ferroresonant pair" which uses a variable inductance and will trigger easily at 20-kc/s rate. The ferroelectric resonant pair should be faster. It uses again the non-linearity of a ferroelectric capacitor *C*. One form has in parallel, across a source $E \sin \omega t$, two series resonant circuits each made of a linear *L* and non-linear *C*. The resonant conditions in non-linear circuits depend on the current amplitudes. It has been shown that with *E* small, ordinary linear resonance can occur in the two branches. But with suitable circuit values there is a range of values of *E* for which this mode becomes unstable, and gives way to a non-linear resonance in which the charges flowing on one branch are much larger than those in the other. Either branch may take the larger current, and windings on *L* will allow triggering from one non-linear resonant state into the other.

Ferrite-Cored Aerials

By "CATHODE RAY"

HOW THEIR EFFECTIVENESS DEPENDS ON THEIR SHAPE

DURING the last few years there has been quite a revolution in broadcast receiving aerials. Unlike some revolutions—for example those in Caribbean politics, but especially more vital matters such as hem height—it has received scanty publicity.

It seems not long since broadcast receivers fell mainly into two classes: the larger one consisting of mains-powered sets occupying a permanent position in the home, and the smaller (in numbers and size) battery-driven portables. The first lot had a socket for connecting a wire aerial, and usually some arrangement for the alternative (and, human nature being what it is, the practically invariable) use of a "mains aerial"—a connection via a small capacitor to the power flex so that it and the house wiring fed to the r.f. input such signals as they picked up. The fact that they formed an excellent channel for electrical interference was such a fruitful source of complaints by the listening public that it gave rise to the "Cathode Ray" Course on How to Become a Radio Expert in Ten Seconds (positively no intelligence needed). All one had to do, without even waiting to hear the details of the trouble, was to advise the patient to substitute an outdoor aerial for the "mains aerial." This worked like a charm in 90% of cases, and one could always talk oneself out of the remainder by murmuring a few technical phrases at random.

The second lot—the portables—were provided with a frame aerial, which had to be reasonably large to give an acceptable performance, and thereby limited the smallness to which the sets could be designed. And because these aerials inevitably embraced within their magnetic and electric fields all the miscellaneous materials forming the rest of the set, they inevitably had rather a poor Q.

But now all that has been abolished, and it is standard practice in both classes of receiver to use a ferrite rod aerial. For a given receptivity it is much smaller than an air-cored (?) frame aerial, so is a very timely development in these days of transistors, making possible loud-speaking superhets that hardly bulge the breast pocket. And because their windings have an internal diameter of less than half an inch, their external fields are confined and the designer has far more control over Q, etc. So their advantages for portables are obvious.

Seeing however that the aforementioned human

nature (and especially feminine human nature) is intolerant of any kind of external aerial, ferrites have likewise swept the board in mains-driven sets, where they provide a generally adequate signal pick-up without the crackle-and-bang accompaniment typical of the "mains aerial."

To the ordinary moderately technical type who is supposed to be reading this (my apologies if the description insults you) two questions are likely to occur. Why is the ferrite core always long and thin? And how does it enable such a small coil to pick up as much as a far larger one without the core?

I could of course short-circuit this article by answering both at once with the reply to the second: "Because it is long and thin." But that will hardly satisfy you if you have in mind that the signal voltage picked up by any coil aerial is proportional to the number and size of its turns of wire, and a ferrite aerial not only has very small turns but also not very many of them. Presumably the advantage of the ferrite lies in its high permeability concentrating the signal flux through the turns of the coil so that each turn picks up far more signal than the same sized turn in air, but how is it that this same permeability doesn't cancel out its own advantage by reducing the number of turns for the required tuning inductance?

Persons of my own limited intelligence have to begin by considering why it is that making the ferrite core long is an advantage. How do the end parts, situated so far from the coil, make themselves useful?

We shall assume first of all that the distant transmitter is providing at the receiving end an oscillating magnetic field which at any given moment is uniform over a space much larger than the aerial. (This is fair enough, because even the shortest waves in the medium band are about 200 yards long, so their magnetic flux density is practically the same everywhere within a yard or so of the aerial.) Such a uniform field is depicted in the conventional way by imaginary lines of force as in Fig. 1. We are supposed to be looking towards the transmitter.

Our second assumption will be that the permeability of the core material is so large that its reluctance—magnetic analogue of resistance—is negligible. (This also is fair enough, because the ferrites used have a permeability of the order of 200, so their reluctance is less than 1% that of air.)

A line of force will therefore not hesitate to go out of its way and thereby increase its air path if necessary by several inches if by doing so it can elsewhere save a rather larger number of inches by passing through the ferrite. If however the ferrite inches are at right angles to the original run of the lines, there is no advantage in turning aside. In Fig. 2 a thin ferrite plate has been so placed, and the field could hardly care less. So a core of this shape, placed inside the turns of a frame aerial orientated




Fig. 1. Conventional representation of a uniform magnetic field by a series of equally spaced parallel straight lines.




Fig. 2. A thin sheet of high-permeability material offers hardly any scope for the flux lines to take an easier (lower-reluctance) path, so barely affects their routes at all.

to embrace the maximum magnetic flux, would be useless.

Fig. 3, by contrast, shows what happens when the ferrite is placed in line with the flux. In case the various distortions of the lines are not self-explanatory, imagine that the spaces between lines are electrical conductors all carrying equal currents in parallel between the same difference of potential across the width of the diagram. Therefore each conductor must be so shaped as to have the same resistance. The relatively large magnetic reluctance of the air can be represented by highly resistive material such as water, and the negligible reluctance of the ferrite by the negligible resistance of metal.

The flux lines near the axis of the rod can pass through its whole length with very little increase in their path length; the resulting great saving in distance through air must be offset by narrower air paths; in other words, the lines crowd together to give a high flux density. Those farther off the axis have to add appreciable air length to take advantage of a ferrite path, so the narrowing of the inter-line spaces is less marked; this forces the lines out of the end parts of the rod. But lines over quite a large cross-sectional area—comparable with that embraced by a conventional frame aerial—pass through the centre part of the rod.

Note that there is some increase in lengths of lines which enjoy no rod path at all; their gain lies in their wider spacing. Some of these lines bend sufficiently to make themselves useful by coupling with at least the outer turns of a coil around the middle of the rod.

Thinking diagrammatically thus, we can draw several conclusions. First and most important, the rod gathers to itself flux that would otherwise need for its embracing a coil of diameter comparable with say half the length of the rod. This flux is thus brought within the scope of a coil of diameter little more than the diameter of the rod, making the aerial much more compact. That answers the question why the rod is long and thin.

Next, the maximum rod flux density is in the centre, tailing off towards each end. So the natural place to put the coil for maximum signal pick-up is at the middle of the rod. We might also conclude that the coil should be short and concentrated in shape, but we would be unwise to do so without more thought.

The factor by which the flux density across the centre of the rod is greater than in empty air is called (rather loosely, I think) the rod permeability or effective permeability, μ_r . As one would guess, it is less than the true permeability μ measured with a closed magnetic circuit, but tends towards that value as the ratio of length to diameter (l/d) of the rod tends to infinity—Fig. 4. A typical value

of l/d is 20; if μ is 200, μ_r is then 100, which also is typical. Incidentally, this is what μ_r would have worked out to be according to our rough guess that the rod might collect as much flux as an air-cored coil equal in diameter to half the rod length; with $l/d = 20$, the ratio of coil diameters would be 10 and the ratio of coil areas 100. But that is either a happy accident, or (you will say) low cunning on my part. Even for other values of l/d , however, the order of magnitude is right, and that is the most we had hoped for.

And now we come to the second question: how is it that the permeability of the ferrite doesn't largely destroy the advantage of increased flux pick-up by reducing the number of turns for a given inductance? The inductance of the aerial coil is indeed "given," by the broadcasting frequency band and the tuning capacitor, which are in no way altered by the use of a ferrite core.

For any particular shape of coil, its inductance is proportional to n^2d , where n is its number of turns and d its diameter. By the use of a core, as we have seen, the same signal flux (and therefore signal voltage) per turn can be picked up by a coil reduced in cross-sectional area by the factor μ_r . So its diameter is divided by $\sqrt{\mu_r}$. If the inductance of the coil were not affected by the presence of the ferrite, it would have to be kept to the same figure by multiplying the original n^2 by $\sqrt{\mu_r}$. The original number of turns, n , would therefore have to be




Fig. 3. If the material is placed end-on, however, much of the flux finds it worthwhile to turn aside in order to get the benefit of its lower reluctance

multiplied by $\sqrt[4]{\mu_r}$, a typical value for which is $\sqrt[4]{10}$ or 3.16. So besides reducing the aerial coil in size, the core would raise the total signal voltage induced in it by this factor. Which of course would be grand. But, as your keen intellects perceived from the outset, probably illusory on account of the effect of the core on inductance.

As Fig. 5 shows, the flux path around the coil is mostly through air, and one might take hope from the thought that however high the permeability of the core material it could hardly make much difference to the flux set up by a given coil current (which is what determines its inductance). Perhaps a two-fold increase, at most. But it must be noted that the flux lines have far more elbow room in the air part of their paths than in the core, so in actual fact the core occupies what would otherwise be responsible for as much as nine-tenths of the total magnetic reluctance. Assuming that the ferrite's permeability is large enough for its reluctance to be neglected, we see that nine-tenths of the total reluctance is removed by the core, leaving only one-tenth.

The number of turns must therefore be adjusted to divide the inductance (multiplied ten-fold by the core) by 10. Since the inductance is proportional

Fig. 4. How the ratio of length to diameter (l/d) of ferrite rod with permeability μ determines its effective permeability μ_r , as regards surrounding magnetic fields. (After H. van Suchtelen, *Electronic Application Bulletin*, Vol. 13, No. 6, p. 88.)


to n^2 (other things being equal) this means dividing the number of turns by $\sqrt{10}$. Which, in this particular case and with the assumptions stated, just cancels out the illusory advantage, leaving us with a small ferrite-cored aerial exactly equal in signal pick-up to the coreless aerial 10 times larger in diameter.

You may remember my advice to suspend judgment on whether or not to wind a coil concentratedly as in Fig. 5 in order to take advantage of the maximum core flux density being confined to the middle of the rod. It is certainly obvious from Fig. 3 that spreading the winding out along the rod results in the average flux embraced per turn being less. But on the other hand this change of coil shape causes the number of turns required for a given inductance to go up. At first, the loss of flux per turn is more than offset by the greater number of turns, so the total signal is greater. On the other hand the larger number of turns is likely to make the Q go down, so the problem becomes rather complicated. If the coil is spread over more than about half the rod, its performance does decidedly fall off. Most of the coils one sees in sets are somewhere between the concentrated Fig. 5 and the fully wound rod.

This design problem may be further complicated by use of the same aerial rod for more than one waveband, and for extra coupling coils for optional external aerial, and as a step-down transformer to a transistor input.

The factor by which the inductance of the coil is increased by the core is another kind of so-called permeability—the coil permeability, μ_c . Obviously it tends to fall off slightly if the coil is slid along towards either end of the rod, and that fact is sometimes utilized for adjusting the coil inductance precisely to the designed value.

We have seen that in a typical example this disadvantageous μ_c is of the order of 10. It is obviously not going to be appreciably increased by ferrite

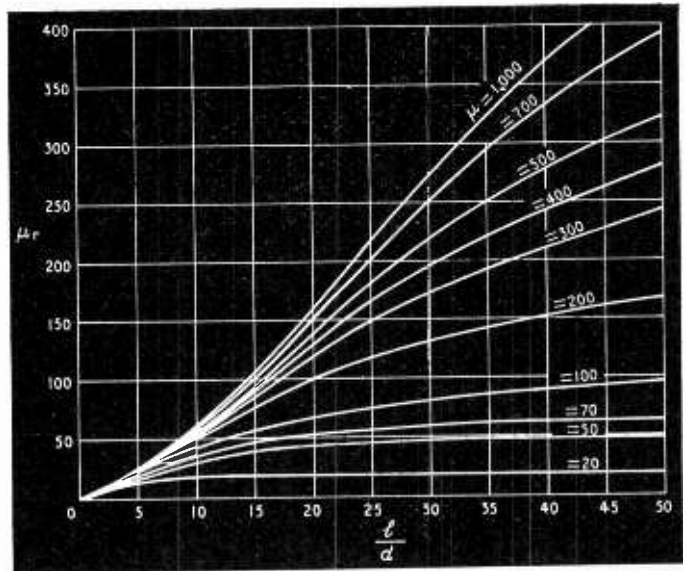

located far from the coil; in other words, increasing the length of the rod, which increases the beneficial μ_r approximately in proportion, has negligible counteracting effect, so is all to the good. It enables μ_r to be much larger than μ_c .

In brief: To a first approximation (taking no account of change of coil shape) the use of the ferrite rod enables the diameter of the coil to be divided by $\sqrt{\mu_r}$ while retaining the same signal voltage per turn. But for the same inductance the number of turns (and hence the total voltage) is increased because of the reduction in diameter, and reduced because of μ_c . The combined multiplying factor $\sqrt{\mu_r}/\sqrt{\mu_c}$. In our example, μ_r happened to be equal to μ_c^2 , causing this factor to be 1 and therefore to make no difference. The shape of coil (as compared with a frame aerial) is usually longer in relation to diameter, putting up the number of turns and therefore the signal voltage; but this advantage is reduced or even reversed by the smaller pick-up per turn away from the centre of the rod, and by the probably lower Q.

If you insist on having it in equations, here they are, in m.k.s. units. The r.m.s. voltage induced in an air-cored coil of n turns, each enclosing an area of A square metres at right angles to a magnetic field producing a flux density in air of B_a webers/m alternating at $\omega/2\pi$ c/s, is

$$e = \omega B_a A n \dots \dots \dots (1)$$

If the coil is ferrite-cored, B_a is thereby multiplied by μ_r :

$$e = \omega B_a \mu_r A n \dots \dots \dots (2)$$

As compared with (1), A is likely to be made smaller in about the same ratio as $1/\mu_r$, giving about the same e per turn. To take account of n we assume that the inductance L is a constant, and make use of the relationship

$$L = k \mu_c d n^2$$

where k is a shape factor, d the diameter in metres, and μ_c the effective permeability of the core as regards the inductance of the coil. This gives n in terms of L , for substitution in (2):

$$e = \omega B_a \mu_r A \sqrt{\frac{L}{k \mu_c d}}$$

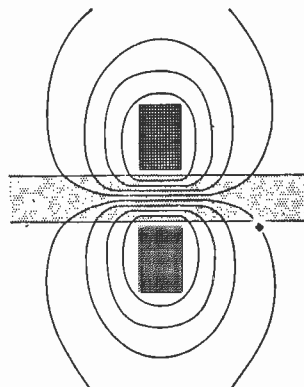


Fig. 5. Typical flux paths due to current in concentrated coil with ferrite rod core.

Since $A = \pi d^2/4$, $d = 1.13\sqrt{A}$, so

$$e = \omega B_a \mu_r A \sqrt{\frac{L}{1.13k\mu_c\sqrt{A}}}$$

This can be clarified by bringing together within a bracket the things we are regarding as constant so far as aerial design is concerned:

$$e = \left(5.9fB_a \sqrt{\frac{L}{k}}\right) \frac{\mu_r A}{\sqrt{\mu_c} \sqrt{A}}$$

In our example, μ_c happened to equal $\sqrt{\mu_r}$, so the denominator was $\sqrt{\mu_r A}$ and on the assumption that $A = 1/\mu_r$ the result was the same amount of e as from an air-cored coil embracing the same total flux.

The voltage across the coil, used as a tuned circuit, is Qe , and when amplification is by valve that is usually the signal voltage available for it.

And that is as far as we are going with these receiving aerials. But in case anyone has been perplexed by reports that ferrite rod aerials are being used for microwave transmitters, I will end with a few notes to show that any similarity these may bear to what we have just been considering is purely coincidental. Their mode of operation is entirely different. These rods are in fact being used not so much for their permeability as for their permittivity or dielectric constant (ϵ), which, at about 9,000 Mc/s. (X-band) is as much as 14. Their relative permeability (μ) on the other hand, is only about 0.75. At lower




Fig. 6. How a radio wave travelling at an angle inside a dielectric rod is partly reflected and partly refracted at the surface.

frequencies it is of course much higher, and comes in very useful in a secondary role, as we shall see.

The usual non-mathematical method of explaining how waveguides work is in terms of waves zig-zagging along the guide, like a drunk man in a narrow passage, with repeated reflections from side to side. At a certain angle (depending on the wavelength) the wave pattern is a possible one; that is, the electric field is continually zero everywhere along the inner metal surfaces. So there is wave motion along the guide but none outside it. Reflection from the metal surfaces is complete.

When, on the other hand, electromagnetic waves reach a boundary between two non-conducting media—such as glass and air—part of the wave is reflected and part goes through but is bent or refracted from its original direction, as in Fig. 6. All this can easily be seen by experimenting with light waves passing from water to air or vice versa. The angle of refraction depends on what is known in optics as the refractive index (better known to us as $\sqrt{\mu\epsilon}$) of one medium relative to the other.

So a solid rod of dielectric material acts to some extent as a waveguide, but with the difference that as the wave travels along the rod more and more of it is transferred to the surrounding air and at the same time directed more forward. The resultant of all the escaping components, allowing for their phase differences, is a beam radiated in the direction in which the rod is pointing. The longer the rod, the narrower the beam.

It has been found that for the X-band, in which the waves are a little more than 3 cm long, good results are obtained with rods about 12 cm long and

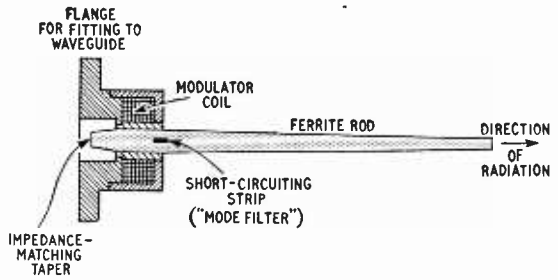


Fig. 7. Section of X-band ferrite-rod transmitting aerial.

0.6 cm thick. To prevent the radiation of side lobes, the beam is tapered to a small diameter at the far end. Waves are launched into the thick end from a waveguide, as shown in Fig. 7. Narrower pencil beams, or fan-shaped radiation, can be produced by parallel arrays of these radiators, as in conventional beam aerial practice.

Even if that were all, it would be a very neat and convenient device. But the low-frequency magnetic property of the rods is utilized too, enabling the beam to be switched on or off, or modulated, or its beam scanned or the polarization of the waves rotated simply and economically without moving parts. This is thanks to the Faraday effect, which is the name given to rotation of the plane of polarization of waves by a magnetic field. Such a field is produced by passing current through the coil shown in section in Fig. 7. Only about 10 mA is needed to rotate the polarization through 90°. By short-circuiting the waveguide from side to side by a metal strip through the ferrite rod, the waves are "turned off" when the plane of polarization is changed from perpendicular to parallel to this strip. This is one of many neat control systems that have been devised. "Elegant" is the word that comes to mind for summing up this composite application of the properties of ferrites.

Electronic Chronometer



This marine chronometer, accurate to 15 sec in one year, is produced by the Sperry Gyroscopic Co. Output from a temperature-controlled crystal oscillator is divided to 50c/s by locked oscillators and output is available at 2 p.p.s. for slave clocks.

Transistors and printed-wiring boards are used and various ships' main supplies are provided for; power consumption is about 6W and accumulators provide emergency power supply, to which switching is automatic.

Designing a Transistor Receiver

2.—R.F. Amplifier and Aerial Stage


By T. SNOWBALL

(Concluded from page 370 in the September issue)

IN the September issue we discussed the design of the receiver by working backwards from the loud-speaker to the detector stage. It now only remains to carry the procedure on to the aerial stage.

The R.F. Stage.—The author decided to use an r.f. stage in order to give the set enough sensitivity on an internal aerial and to permit the diode detector to work on a linear part of its characteristic curve when tuned to local stations. An r.f. transistor stage covering 200kc/s to 1.5Mc/s, using a transistor which is not too expensive, means a carefully designed stage in order to get a good proportion of the available gain. To get the maximum gain the input tuned circuit must be matched to the input impedance of the transistor, and also the transistor output impedance must be matched into the following stage input impedance. In a matched case like this a theoretical gain of approximately 45dB can be obtained with an OC44, but due to an internal feedback path equivalent to 10pF and 3k Ω the stage will probably oscillate. It is therefore advisable to neutralize the internal feedback by means of an external path. When both the real and imaginary parts of the feedback are completely cancelled the process is known as unilateralization.* When the r.f. stage is perfectly neutralized the maximum gain expected, with no circuit loss, is shown in Fig. 9. But of course over the frequency range 200kc/s to 1.5Mc/s the internal parameters of the transistor change, the neutralization will not be perfect, and some feedback will occur. About the only way out of this situation in a production run would be to reduce the gain of the stage, such that the product of forward gain and feedback path attenuation is one quarter. This is the long way of saying that

* "The Junction Transistor and its Applications" E. W. Wolfendale, p.163.

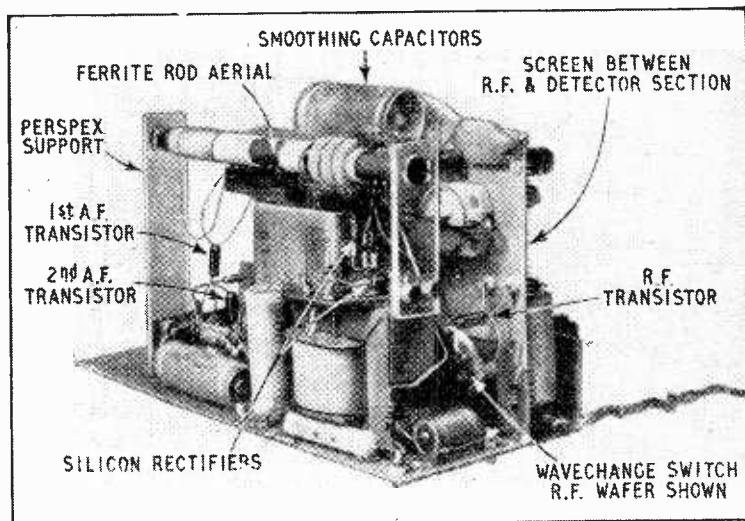

Rear of the chassis showing the mains transformer and principal components.

the loop gain is made $\frac{1}{4}$, or a stability factor of 4 is achieved. This method should certainly be adopted in a production set but inevitably, in order to cater for production spreads, the actual loop gain will have to be limited at some frequencies to even less than $\frac{1}{4}$.

The easiest way of reducing gain is to reduce the collector load. This is formed by the transformed impedance of the diode and the tuned circuit dynamic impedance in parallel. Perhaps the best way to explain this is by means of an equivalent circuit. The one shown in Fig. 10(a) is a π equivalent circuit obtained from the hybrid π found in most transistor data sheets and in the literature. When unilateralized, the capacities can be absorbed into the tuned circuits and the internal feedback is cancelled. Thus the equivalent circuit becomes Fig. 10(b).

So in order to get the maximum power gain from the stage, the aerial circuit is matched into R_{in} , and the diode impedance is transformed up to the collector output impedance, R_{out} . The tuned circuit is also in the collector circuit, and introduces a loss resistance in shunt with the other resistors as in Fig. 10(c).

The value of the load resistor can be arranged to reduce the forward gain to the value required for stability in a production amplifier. But the author found that a much larger proportion of the available gain can easily be obtained in individual cases, such as where the constructor can effect some adjustment to the circuit. This adjustment consists mainly of ensuring correct neutralization and perhaps reducing the collector load to give stability. This has to be done with the selectivity of the circuits borne in mind. The bandwidth of a tuned circuit is defined as f_0/Q . With two tuned circuits the overall bandwidth is ≈ 0.6 times the bandwidth of

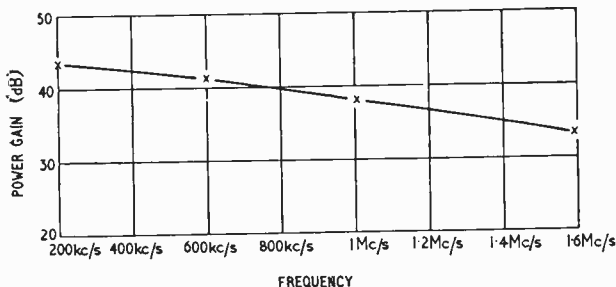


Fig. 9. Maximum power gain/frequency curve with matched load and unilateralization.

each circuit. Thus to get 9kc/s overall bandwidth at 1Mc/s a working Q_w of 65 is needed. It is necessary to ensure that Q_w is not too high, thus cutting top notes, or too low, thus giving the chance of an interfering station intruding.

In a practical case R_{out} is 28 k Ω and R_L is 28 k Ω . Assuming the best coil which can be easily wound has a Q_o of 130, then using a tuning capacitor of 100pF at 1Mc/s will give a dynamic impedance of $Q_o/\omega C = 200k\Omega$. To get a working Q_w of 65 this means damping by a resistance of 200k Ω . This damping comes from the parallel value of R_{out} and R_L (14k Ω). So the transformer ratio between tuned circuit and collector is $\sqrt{200/14} = 3.8$ to 1. Or in other words the dynamic impedance of the tuned circuit is reflected into the collector circuit as 14k Ω , thus absorbing four times as much power as the load, or introducing a 6-dB power loss. So using values from the OC44 data in the equivalent circuit Fig. 11(a):—

Volts across load = $gm V_i$ (parallel load) = $20 \times V_i \times 7 = 140V_i$.

$$\text{Power in load} = \frac{V^2}{R_L} = \frac{(140V_i)^2}{28 \times 10^3}$$

$$\text{Power in Base} = \frac{V_i^2}{R_{in}} = \frac{V_i^2}{2.7 \times 10^3}$$

$$\therefore \text{Power Gain} = \frac{140^2 \times 2.7}{28} = 1900$$

or $10 \log 1900 = 32.7\text{dB}$.

This value seems to be realizable in practice, as long as the stage is perfectly neutralized. But if a value of neutralizing capacitor is chosen, using the nominal value of collector feedback capacitor, the constructor could have an out-of-balance feedback capacitor of 3.5pF, due to tolerance on the internal collector feedback capacitor alone, besides the usual 20% component tolerance. The equivalent circuit now becomes Fig. 11(b).

Here it can be seen that the output voltage is attenuated by the reactance of the 3.5pF and the input circuit of the transistor. At 1Mc/s this attenuation is $(X_c + 1.35)/1.35 = 34$. The forward gain is 140, so the loop gain is high and if the phase is correct oscillation can occur. Even if oscillation does not occur the shape of the selectivity curve may become distorted. But the home constructor will be able to rectify this by reducing the collector load as mentioned. Also if the collector load is reduced by reflecting a lower impedance from the diode the working Q_w must be borne in mind, and a lower tap on the coil may have to be used, which in turn will reflect a lower impedance into the collector circuit. This is brought out in the following example:—

A forward voltage gain of 34 will give a loop gain of 1, and so stability is just theoretically possible. Voltage gain = $gm \times \text{total load}$, therefore load = $34/20 = 1.7k\Omega$. So with a total collector load of 1.7k Ω and the coil again introducing a loss of 6dB, the coil loss resistance being equal to the load resistance, we get Fig. 12.

As was done before, the coil needs to be damped by 200k Ω to give the correct Q_w . This damping comes from R_{out} and R_L in parallel. The transformer ratio is $\sqrt{200/3.2} = 7.9$ to 1. The power gain will have dropped to $3.4^2 \times 2.7/3.6 = 870$, or $10 \log 870 = 29.3\text{dB}$.

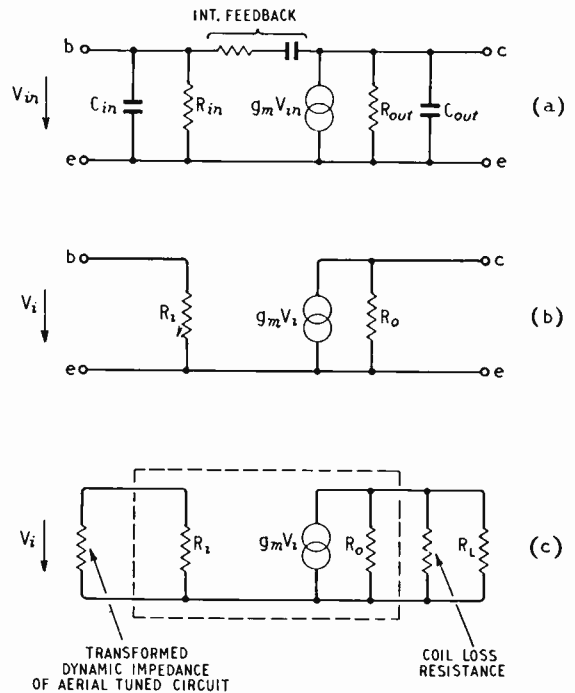


Fig. 10. The π equivalent circuit of a unilateralized transistor r.f. stage shown at (a), simplified by absorbing capacitances in tuned circuits at (b) and with addition of tuned-circuit loss resistance at (c).

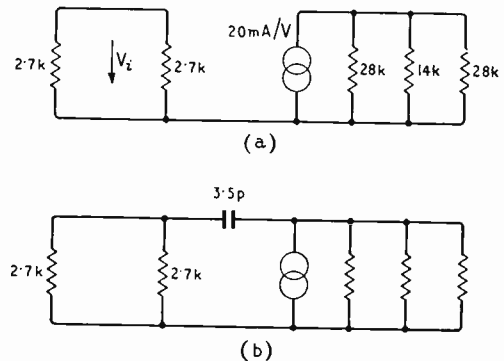


Fig. 11. Equivalent circuit values of r.f. stage (a) unilateralized at 1Mc/s and (b) with some out-of-balance feedback due to imperfect neutralization.

This lower gain gives a loop gain of 1 at 1Mc/s, but if the variations of output and input impedance are taken into account, as the frequency changes, the design gets rather complicated. The author found it easier to get the maximum gain by matching the stage correctly and with accurate neutralization the stage was stable at all frequencies.

Coming now to the practical circuit; in the table are the various parameters at different frequencies for $I_c = 0.5\text{mA}$, $V_{ce} = 6\text{V}$, with $I_c = 0.5\text{mA}$ giving the smallest variation of these parameters over the band.

As can be seen, the transformer ratio for a perfect match varies considerably with frequency, whereas the neutralizing capacitor remains constant and as this needs to be fed from the diode winding to give

correct phase, it confines the design to one chosen ratio.

So using 1Mc/s as the design frequency:—
Turns ratio (collector/diode) = 1.65 to 1.
Thus defining our neutralizing capacitor as $10.3 \times 1.65 = 17\text{pF}$ and resistor as $2.5/1.65 = 1.5\text{k}\Omega$:—
Turns ratio (tuned circuit/collector) = 3.8 to 1.

This was arrived at when the case for maximum power transfer was worked out. With a Q_o of 130 and 100-pF tuning capacitor, this means an L of $250\mu\text{H}$. To cover the medium waveband 50 to 250pF tuning capacitance will be required.

With the usual small dust-cored coil formers this requires approximately 110 turns on a former $\frac{3}{8}$ in dia using 9/45 Litz wire in order to get a Q_o around 130. The collector is tapped in at 29 turns and the diode winding has 18 turns wound the same sense and preferably wound on first to get a good coupling coefficient. In practice the coil is one winding of 128 turns with tappings at 18 and 47 turns from the "earthy" end of the coil, then the two wires of the first tap are separated and become the finish of the diode winding and the beginning of the collector winding respectively, bearing in mind the correct phase for neutralization.

Unless a wave-winding machine is available the easiest way to wind the coils is between two discs of good quality insulant, stuck $\frac{1}{4}$ in apart on the former. On the long waves at 200kc/s we select a preferred value of 470pF for the tuning capacitor, then L = 1.3mH, which is not too difficult to wind. This gives a dynamic impedance of $130\text{k}\Omega$ if $Q_o = 80$. Here the collector-to-diode ratio must still be 1.65 to 1 for neutralization considerations and the

Table of Relevant Parameters at $V_{ce} = 6\text{V}$, $I_c = 0.5\text{mA}$

Frequency	1.5Mc/s	1.0Mc/s	650kc/s	200kc/s
R_{in}	1.7k Ω	2.7k Ω	3.7k Ω	5k Ω
R_{out}	18k Ω	28k Ω	36k Ω	46k Ω
Internal feedback capacitance C	10.3pF $\pm 3.5\text{pF}$	10.3pF $\pm 3.5\text{pF}$	10.3pF $\pm 3.5\text{pF}$	10.3pF $\pm 3.5\text{pF}$
Internal feedback resistance R	2.5k Ω	2.5k Ω	2.5k Ω	3.5k Ω
gm	20mA/V	20mA/V	20mA/V	20mA/V
Collector/diode ratio =	$\sqrt{\frac{18}{10}} = 1.3$ to 1	$\sqrt{\frac{28}{10}} = 1.65$ to 1	$\sqrt{\frac{36}{10}} = 1.9$ to 1	$\sqrt{\frac{46}{10}} = 2.1$ to 1
Collector output imped.				
Diode input imped.				
Diode imped. = 10k Ω				
Aerial/base ratio =	$\sqrt{\frac{600}{1.7}} = 18$ to 1	$\sqrt{\frac{400}{2.7}} = 12$ to 1	$\sqrt{\frac{300}{3.7}} = 9$ to 1	$\sqrt{\frac{180}{5.0}} = 6$ to 1
Circuit dynamic imped.				
R_{in} (transistor)				

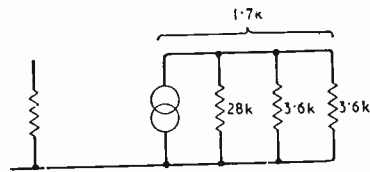


Fig. 12. Part of equivalent circuit showing collector load for a loop gain of one.

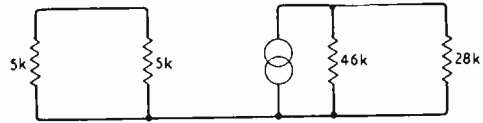


Fig. 13. Equivalent circuit of unilateralized r.f. stage at 200kc/s.

equivalent circuit then becomes as shown in Fig. 13.

To reduce the Q_o of the coil to a half, its dynamic impedance, referred to the collector, has to be equal to the parallel load, which is $28 \times 46/74 = 17.5\text{k}\Omega$. Giving a tuned circuit/collector ratio of $\sqrt{130/17.5} = 2.7$ to 1. There is not a lot to be gained by winding this coil with Litz as the working Q_w does not need to be very high to give the same bandwidth. In fact it works out at $Q_w = 15$, so perhaps in order to avoid top note cut on the long waves the coil should be more heavily damped, but the author has not found this really necessary.

The longwave tuned coil is wound with No. 40 s.w.g., s.s.c. (or EN.) and requires 300 turns for an inductance of 1.3mH. The total winding consists of 367 turns tapped at 67 and 177 turns thus providing the separate diode winding, collector winding and remainder of the tuned winding. With $R_{in} = 5\text{k}\Omega$, $R_{out} = 46\text{k}\Omega$, $gm = 20\text{mA/V}$:—
Volts across load = $gm V_i \times 8.75\text{k}\Omega = 175V_i$.

$$\text{Power in } R_L = \frac{(175V_i)^2}{28 \times 10^3}$$

$$\text{Power in Base} = \frac{V_i^2}{R_{in}} = \frac{V_i^2}{5\text{k}\Omega}$$

$$\therefore \text{Power gain} = \frac{175^2 \times 5}{28} = 5,500 \text{ or } 10 \log 5,500 =$$

37dB.

Stability is better than in the medium wave case because the reverse attenuation is now $(X_c + 2.5)/2.5 = 91$.

Aerial Stage.—There now only remains the aerial circuit to discuss. This is very simple as almost any commercial ferrite-rod aerial will do, as long as a check on the coupling winding is carried out. These aerials have an extremely high Q_o , of the order 250 to 300, giving a dynamic impedance of 450k Ω at 1Mc/s with 100pF tuning capacitance, so to match to the input impedance of 2.7k Ω at 1Mc/s the ratio will be $\sqrt{450/2.7} \approx 12$ to 1. Thus, for a practical medium-wave coil the windings consist of 60 turns of 9/45 Litz with 5 turns of No. 40 En for the coupling coil; the number of turns on the coupling coil is so small that it is easy to adjust on test should the matching be in doubt.

If the aerial is constructed at home the coupling windings should be on the inside of the tuned circuit winding, at the earthy end, and as shown in

Fig. 14. On the long waves, and the highest medium-wave frequency to be received, no trimmers are used in the aerial circuit, tuning being accomplished by sliding the coils along the ferrite rod. The number of turns for the ferrite-rod aerial will depend, of course, on the grade and make of ferrite used. Those given in Fig. 14 should be taken as a guide only and if during the initial tests a variable capacitor is employed, either in place of the fixed 100pF and 470pF capacitors or in parallel with them it will soon be evident if any adjustment is necessary.

In describing the stage the neutralizing capacitor has been calculated as 18pF; this could be a fixed capacitor. But if a transistor with its internal feedback capacitance near the tolerance limit is used, a fixed neutralizing capacitor may cause oscillation. A simple way of ensuring perfect neutralization is as follows:—

The supplies are left on the transistor and if it is in oscillation before the check is carried out, then oscillation must be stopped by temporarily connecting a resistor across the tuned circuit. Then a signal generator is connected, via a resistor (in order to pad up the signal generator impedance), to the diode winding. Now a portion of the signal will be fed back to the base via the neutralizing components and also through the transistor internal feedback, and by means of a valve voltmeter or oscilloscope the fraction which arrives at the base, due to out of balance in the two feedback paths,

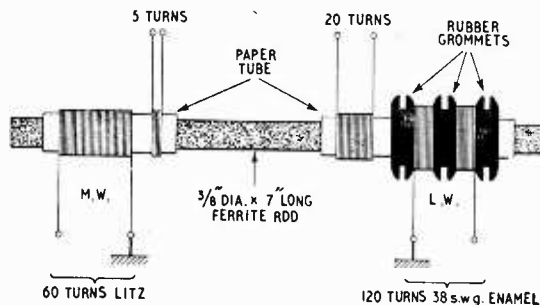


Fig. 14. Winding layout on ferrite-rod aerial.

can be reduced to a minimum by adjusting the neutralizing capacitor and resistor. The capacitance will be found to be the more critical. See that the aerial and collector circuits are correctly tuned and finally check once more with the damping resistor removed.

The author hopes that prospective constructors will be able to follow the design details; and if a transistor other than the OC44 is used the manufacturer should be able to supply the relevant parameters.

The receiver has proved a most useful "second set" for use anywhere in the house or out of doors, its zero warm-up time and simple station selection being greatly appreciated by the family.

FORTHCOMING MEETINGS

Tickets are required for some meetings; readers are advised therefore to communicate with the secretary of the society concerned.

LONDON

Oct. 22nd. Television Society.—Discussion on "New television standards: their effect on British television" at 7.0 at the Cinematograph Exhibitors' Association, 164 Shaftesbury Avenue, W.C.2.

Oct. 22nd. Institution of Production Engineers.—"Computers as applied to production control" by B. L. J. Hart at 7.0 at Royal Commonwealth Society, Northumberland Avenue, Strand, W.C.2.

Oct. 27th. I.E.E.—Discussion on "Future trends in memory stores for high-speed digital computers" opened by W. Renwick at 5.30 at Savoy Place, W.C.2.

Oct. 27th. Radar and Electronics Association.—"Electronics in supersonic flight" by F. W. Page (English Electric Aircraft Division) at 7.30 at the Royal Society of Arts, John Adam Street, W.C.2.

Oct. 28th. I.E.E.—"Development of Eurovision" by M. J. L. Pulling, chairman, Electronics and Communications Section, at 5.30 at Savoy Place, W.C.2.

Oct. 28th. Brit.I.R.E.—Inaugural meeting of Radar and Navigational Aids Group: "Radio—its impact on shipping" by Capt. J. D. F. Elvish and "A historical survey of radar and radio aids to aircraft navigation", by Air Marshal Sir Raymond Hart at 6.30 at the London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

Oct. 30th. Junior Institution of Engineers.—"Planning a computer job"

by M. G. Ferrand at 7.0 at Pepys House, 14 Rochester Row, Westminster, S.W.1.

Oct. 31st. B.S.R.A.—Stereo Symposium from 10.30 a.m. at the London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

Nov. 2nd. I.E.E.—"Some comments on the classification of waveguide modes" by Dr. A. E. Karbowiak and "Some comments on quasi-optical methods at millimetre wavelengths" by L. Lewin at 5.30 at Savoy Place, W.C.2.

Nov. 3rd. I.E.E.—"An analogue electronic multiplier using transistors as square-wave modulators" by P. Glegghorn at 5.30 at Savoy Place, W.C.2.

Nov. 4th. Brit.I.R.E.—Computer Group half-day symposium on "Input/output devices" at 3.0 and 6.0 at the London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

Nov. 4th. British Kinematograph Society.—"Magnetic tape for video and audio recording" by Dr. G. F. Dutton (E.M.I.) at 7.30 at the Colour Film Services Ltd. Theatre, 22-25 Portman Close, Baker Street, W.1.

Nov. 6th. I.E.E.—Medical Electronics Discussion Group meeting at 6.0 at Savoy Place, W.C.2.

Nov. 6th. Television Society.—"Deflection techniques for 110° picture tubes" by B. Eastwood (Siemens Edison Swan) at 7.0 at the Cinematograph Exhibitors' Association, 164 Shaftesbury Avenue, W.C.2.

Nov. 9th. I.E.E.—"Theory of the

travelling-wave parametric amplifier" by Professor A. L. Cullen; "The gain of travelling-wave ferromagnetic amplifiers" by Dr. P. J. B. Clarricoats; "Some properties of travelling-wave resonance" by J. R. G. Twisleton and "Saturation effects in a travelling-wave parametric amplifier" by A. Jurkus and P. N. Robson at 5.30 at Savoy Place, W.C.2.

Nov. 11th. Brit. I.R.E.—Medical Electronics Group meeting on "Physiological and acoustical aspects of hearing" by Dr. R. P. Gannon at 6.30 at the London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

Nov. 12th. Physical Society, Acoustics Group.—"The propagation of Rayleigh waves" by G. Mott and "Wave propagation in crystals" by M. J. P. Musgrave at 4.0 at Imperial College, Prince Consort Road, S.W.7.

Nov. 13th. Junior Institution of Engineers.—"Electronic components" by W. C. C. Ball (chairman) at 7.0 at Pepys House, 14 Rochester Row, Westminster, S.W.1.

Nov. 18th. Brit.I.R.E.—Half-day symposium on "Electronic digitizing techniques" at 3.0 and 6.0 at the London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

Nov. 20th. Television Society.—"Television film production" by J. K. Byers (B.B.C.) at 7.0 at the Cinematograph Exhibitors' Association, 164 Shaftesbury Avenue, W.C.2.

Nov. 20th. B.S.R.A.—"Loudspeakers" by S. Kelly at 7.15 at the Royal Society of Arts, John Adam Street, W.C.2.

Nov. 24th. Radar and Electronics Association.—“Waveguides for long-distance communications” by Professor H. M. Barlow (University College, London) at 7.30 at the Royal Society of Arts, John Adam Street, W.C.2.

Nov. 25th. I.E.E.—“Radio aspects of the International Geophysical Year” by Dr. R. L. Smith-Rose at 5.30 at Savoy Place, W.C.2.

ABERDEEN

Nov. 13th. I.E.E.—“The application of transistors to line communication equipment” by H. T. Prior, D. J. R. Chapman and A. A. M. Whitehead at 7.30 at Robert Gordon's Technical College.

BIRMINGHAM

Oct. 26th. I.E.E.—“Reliability of electronic equipment” by A. G. Field at 6.0 at the James Watt Institute.

Nov. 13th. Society of Instrument Technology.—“Ultrasonic inspection techniques” by W. B. Emms at 7.0 in the Lecture Theatre of the Byng Kendrick Suite at the Gosta Green College of Technology, Aston Street.

BRISTOL

Nov. 18th. Brit.I.R.E.—“Data recording and presentation” by D. W. Thomasson at 7.0 at the School of Management Studies, Unity Street.

CAMBRIDGE

Nov. 3rd. I.E.E.—“The development of Eurovision” by M. J. L. Pulling at 8.0 at the Cavendish Laboratory, Free School Lane.

CARDIFF

Oct. 28th. Brit.I.R.E.—“Stereophonic sound and electrostatic loudspeakers” at 6.30 at Cardiff College of Advanced Technology.

CHELTENHAM

Nov. 3rd. Society of Instrument Technology.—“Satellite instrumentation” by S. J. Collins at 7.30 at the Belle Vue Hotel.

CHESTER

Oct. 29th. Society of Instrument Technology.—“Industrial uses of computers” by R. H. Tizard at 7.0 at the English-Speaking Union, Stanley Place, Watergate Street.

DUNDEE

Nov. 12th. I.E.E.—“The application of transistors to line communication equipment” by H. T. Prior, D. J. R. Chapman and A. A. M. Whitehead at 7.0 in the Electrical Engineering Department, Queen's College.

EDINBURGH

Oct. 23rd. Brit.I.R.E.—“True motion radar” by J. H. Beattie at 7.0 at Department of Natural Philosophy, The University, Drummond Street.

Nov. 12th. Brit.I.R.E.—“The transistor and its use in communication and control equipment” by E. Wolfendale at 7.0 at the Department of Natural Philosophy, The University, Drummond Street.

FARNBOROUGH

Oct. 20th. I.E.E.—“Space research” by Dr. R. L. F. Boyd at 6.0 at the Technical College, Boundary Road.

GLASGOW

Oct. 22nd. Brit.I.R.E.—“True motion radar” by J. H. Beattie at 7.0 at Institution of Engineers and Shipbuilders, 39 Elmbank Crescent, C.2.

Oct. 27th. I.E.E.—“Ultra-sound

image camera” by Dr. C. N. Smyth and J. Sayers at 6.0 at the Royal College of Science and Technology, George Street, C.1.

Nov. 4th. I.E.E.—The Fiftieth Kelvin Lecture on “The Geophysical Year 1957-58” by Sir David Brunt at 6.0 at the Institution of Engineers and Shipbuilders, 39 Elmbank Crescent, C.2.

Nov. 11th. Brit.I.R.E.—“The transistor and its use in communication and control equipment” by E. Wolfendale at 7.0 at the Institution of Engineers and Shipbuilders, 39 Elmbank Crescent, C.2.

LIVERPOOL

Nov. 2nd. Brit.I.R.E.—“Electronics in the auto-pilot of the Firestreak missile” by A. Bedford at 7.0 at the University Club.

Nov. 10th.—Brit.I.R.E.—“The use of transistors in communications and control” by E. Wolfendale at 7.0 at the University Club.

Nov. 11th. I.E.E.—“Vision and position—two electronic aids to marine navigation” by Dr. R. B. Mitchell and C. Powell at 6.0 at The Temple, Dale Street (joint meeting with the Liverpool Engineering Society).

MALVERN

Oct. 27th. Brit.I.R.E.—“Superconducting computer stores” by Mrs. Lois Roberts at 7.0 at the Winter Gardens.

MANCHESTER

Nov. 10th. Society of Instrument Technology.—“Transistors” by S. S. Goldberg at 6.45 at the “Manchester Room,” Central Library, St. Peter's Square.

Nov. 11th. I.E.E.—“Ultra-sound image camera” by Dr. C. N. Smyth and J. Sayers at 6.15 at the Engineers' Club, Albert Square.

Nov. 12th. Brit.I.R.E.—“Progress in permanent magnet materials” by J. E. Gould at 6.30 at the Reynolds Hall, College of Science and Technology, Sackville Street.

MIDDLESBROUGH

Nov. 12th. Society of Instrument Technology.—“Analogue computers” by R. E. Hare at 7.30 at the Cleveland Scientific & Technical Institute, Corporation Road.

NEWCASTLE

Nov. 11th. Brit.I.R.E.—“Electronic welding controls” by C. R. Bates at 6.0 at the Institution of Mining and Mechanical Engineers, Neville Hall, Westgate Road.

Nov. 18th. Society of Instrument Technology.—“The Principles and manufacture of junction transistors” by P. I. Nicolson at 7.0 in The Conference Room, Roadway House, Oxford Street.

RUGBY

Nov. 11th. I.E.E.—“The Universe explored by radio astronomy” by F. C. Smith at 6.30 at the Rugby College of Technology and Arts.

SALISBURY

Nov. 11th. I.E.E.—“The planning and installation of a television transmitting station” by D. B. Weigall at 6.30 at S.E.B. Showrooms, 17 New Canal.

WOLVERHAMPTON

Nov. 11th. Brit.I.R.E.—“Recent developments in semiconductor rectifiers” at 7.15 at the Wolverhampton and Staffordshire College of Technology, Wulfruna Street.

Two Trix models

PROVED
and
IMPROVED

COLUMN TYPE LOUDSPEAKER

An all-round improvement in acoustic efficiency, permitting smaller powered amplifiers... a distinct directional flat beam effect extending coverage while sharply reducing reverberation and feedback effects. One Trix column replaces with greater efficiency a large number of normal speaker units with a corresponding reduction in installation costs. For all sound installations superb clarity of reproduction is assured for both speech and music.

Write for detailed technical information.

RIBBON MICROPHONE

Now smaller, this new design gives improved performance, minimizing feedback effects while improving frequency response and sensitivity.

Model G7823 is complete with screened connector plug and locking ring, and beautifully finished in satin chrome. A silent switch adaptor G7819 is also available.



TRIX

THE TRIX ELECTRICAL CO. LTD.,
1-5 MAPLE PLACE LONDON, W.1.

Tel: MUSeum 5817 (6 lines)
Gram: Trixadio Wavlo London

RANDOM RADIATIONS

By "DIALLIST"

Pay As You View

IT'S interesting to learn that the American Federal Communications Commission has at long last agreed for a trial of pay-as-you-view television for a limited period in one specified area. In a country where there are no TV licence fees and where the programmes are so interlaced with advertising matter that several "kill that commercial" muting devices operated from the viewer's armchair have been brought out, one would think that the P.A.Y.V. system has a good chance of success. Here's how the Zenith subscription TV system, to be used in these "trials," works. The broadcast transmissions are scrambled and receivable only by those whose sets are fitted with a decoder. This can be added to any set. Each subscriber receives every week a programme of the matter to be provided and the cost of viewing any item. He reads, let's say, that the opening night of a musical is to be televised. He puts the money stated in the programme schedule into slots in the decoder and has an armchair view of the "opening night." It could be a very great success, for if the response was good, very expensive programmes could be put on without any commercial backing. Half a million people, for instance, paying the equivalent of a shilling apiece

would bring in £25,000. Don't you feel that even though we have to pay licence fees the idea might be worth thinking about for our own third TV service?

What Can be Cured Shouldn't be Endured

HAVE you noticed how few non-technical users of sound and television receivers ever bother to read the book of words supplied with every set? You're pretty sure to have done so and like myself I imagine you're constantly being surprised by the indifferent reception that people put up with simply and solely because they won't take the trouble to use the control knobs as the instruction book directs. These books are very carefully prepared and many of them are quite admirable. Ekco, to take one example, illustrate a number of typical results of faulty adjustments to their television set and explain which control is to be used to put each to rights. A few days before this was written I dropped in to see some friends, who told me they feared they would have to call in the dealer because the television picture wasn't right. When I asked what was amiss they switched on the set and showed me that the picture was too narrow. "Have you got the instruction book?" I asked. After some searching in drawers it

was produced. I flicked over the pages and handed the book back, pointing to one of the illustrations, which showed too narrow a picture and directed the use of the width control. Urged on by me they used it and all was well.

Too Many Inside

THERE seems to be a tendency for TV receiver manufacturers or some of them at any rate, to reduce the number of outside-the-cabinet control knobs and to tuck more and more of them away in the bowels of their products. I'm all for making television sets look neat and tidy, but the number of controls which can usefully be of the pre-set variety is definitely limited. As valves age their characteristics change and both resistors and capacitors are liable to alterations in their values as time goes on. Here's a case to illustrate my point. A while ago a friend told me that his picture had become over narrow and that the circle on the test card appeared to be egg-shaped. Easy enough, thought I; a real do-it-yourself job. I bade him find a knob labelled "width" or possibly "line amplitude" at the back of his set, and to twiddle that slowly until things became right. Next time I met him he told me that there wasn't such a knob and that he'd had to send for his dealer. "Took the back off," he said, "and went right into the innards of the set to make the adjustment." That doesn't seem right to me, for it means unnecessary work for the serviceman and expense for the set owner.

A Warning

And there's more to it than just that. Putting too many controls inside the cabinet may tempt the set owner to get busy himself in the works—and that's a risky job unless you know your way about a TV set. Even if you do, there's still an important thing that isn't always done; make sure before you get to work that the chassis isn't "hot." A simple way of doing that is to use a neon tester; but remember that if it doesn't glow, that is not proof positive that the chassis won't bite. The neon bulb might be broken. Make sure by applying the tester to

"WIRELESS WORLD" PUBLICATIONS



	Net Price	By Post
RADIO DATA CHARTS. R. T. Beatty, M.A., B.E., D.Sc. Revised by J. Mc. G. Sowerby, B.A., A.M.I.E.E. 5th Edition	10/6	11/6
TELEVISION RECEIVING EQUIPMENT. W. T. Cocking, M.I.E.E. 4th Edition	30/-	31/9
TRANSISTOR A.F. AMPLIFIERS. D. D. Jones, M.Sc., D.I.C., and R. A. Hilbourne, B.Sc.	21/-	21/10
LONG-WAVE AND MEDIUM-WAVE PROPAGATION. H. E. Farrow, Grad.I.E.E.	4/6	4/10
RADIO VALVE DATA. Compiled by "Wireless World." 6th Edition	5/-	5/9
RADIO CIRCUITS: A Step-by-Step Survey. W. E. Miller, M. A. (Cantab.), M.Brit.I.R.E. Revised by E. A. W. Spreadbury, M.Brit.I.R.E.	15/-	15/10
FOUNDATIONS OF WIRELESS. M. G. Scroggie, B.Sc., M.I.E.E. 7th Edition	15/-	16/4
SECOND THOUGHTS ON RADIO THEORY. "Cathode Ray" of "Wireless World."	25/-	26/4
PRINCIPLES OF TRANSISTOR CIRCUITS. S. W. Amos, B.Sc. (Hons.), A.M.I.E.E.	21/-	21/11

A complete list of books is available on application.

Obtainable from all leading booksellers or from

ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1

a point which should be live, such as the phase contact of the wall socket.

Say "Ah"

SOMETHING entirely new in the way of stethoscopes is announced by Faraday Electronic Instruments Ltd. It's claimed that it enables its user to hear only what he wants to hear and to cut out undesired sounds. Any layman who has ever been allowed by a doctor to use his stethoscope to listen to, say, a beating heart, knows the extraordinary jumble of gasping, rumbling and creaking noises which come through along with the beats. The Soniscope, as it is called, has a crystal microphone with a heavy diaphragm which responds only to sounds coming from something with which it's in contact; it won't, for instance, pick up speech if only an inch or two from the lips, though it will do so if placed against the jaw or the neck. Separation of wanted from unwanted sounds is done by means of h.f. and l.f. attenuators. Speaking as one with no claim to any medical knowledge, I'd have thought that lots of skill and practice would be needed for it to be used purely for diagnosis, for it does seem possible that some significant noise might inadvertently be tuned out as unwanted. But there's no doubt about its usefulness for demonstration purposes for it can be connected to an amplifier and a loud-speaker.

Hi-Fi in Geophysics

HI-FI is all the rage today and the label is to be found on equipment in unexpected places. Geophysics is the latest realm it has invaded—or should I say embellished? The American Southwestern Electronics Co. has recently announced a 24-channel transistorized seismic system, providing high-fidelity frequency-modulated tape recordings from the output of standard geophysical amplifiers. I don't know enough about the seismic aspect of geophysical research to grasp the exact significance of hi-fi as applied to it; but I imagine that the presence of "noise" and distortion in recordings might seriously impair results and possibly introduce more or less important errors. Anyhow, if you're a seismic geophysicist, hi-fi is there waiting for you. The distortion is less than 1 per cent, the signal-to-noise ratio 60 dB r.m.s. and the timing accuracy is 0.2 millisecond. The whole outfit consists of two units, weighing respectively 50 lb and 40 lb.

Television makes many demands on men and equipment

Instantaneous response and complete reliability are keynotes to the success of the vast Television Industry, it being necessary for the complex equipment used to give a constant high standard of performance under the many conditions imposed.



BULGIN COMPONENTS fulfil these requirements and their use makes possible new techniques—which in their turn are opening up fields of research which were undreamed of a few years ago.

The skill of the BULGIN Research division is unparalleled and its unique experience is at YOUR disposal.



OVER 10,000 COMPONENTS AVAILABLE

Send for Catalogue No. 200 (add suffix 'C' for priority) which gives complete technical and illustrative details of our entire range. (1/6 Post free, or free to trade letterhead or order.)

BULGIN

FOR QUALITY COMPONENTS

**A. F. BULGIN & CO. LTD.
BARKING, ESSEX**

Telephone: RIPPleway 5588
(12 lines)



LIST No. J.6



LIST No. D.780/Colour



LIST No. F.167



LIST No. D.58



LIST No. S.530



LIST No. K.435



LIST No. S.600/PD



LIST No. S.725

UNBIASED

By FREE GRID

P. A. Pioneer

PUBLIC ADDRESS is so much a feature of an election campaign such as the one we have recently endured that it is hard to recall a time when it was non-existent. The first election campaign in which I personally recollect a *commercial* p.a. system being used was at the by-election in Marylebone during April, 1928. But loudspeakers were used by candidates a long time before that.

I speak subject to correction, but I believe the loudspeaker was first introduced into politics by F. H. Haynes when Assistant Editor of this journal. I well remember him making an amplifier and loudspeaker—the term public address was not then used—for the candidate of his choice in one of the St. Pancras divisions. I recollect listening to the—by 1959 standards—rather lo-fi output of the loudspeaker, and mentally deciding that the Brobdignagian bellowings of the loudspeaker were more likely to be a hindrance than a help to the candidate. I believe, however, I am right in saying that the candidate was duly elected despite the efforts of the loudspeaker.

It is possible, however, that a loudspeaker was used for electioneering before the creation of the Haynes p.a. outfit. It is even possible that a loudspeaker could have been used in pre-B.B.C. days. The B.B.C. began its continuous broadcasting by giving the election results on November 14th, 1922. If, indeed, a loudspeaker was used by any candidate in that election it was probably the Stentorphone which I personally recollect hearing on the pier at New Brighton in August, 1921. This instrument was what I would call a *magneto-pneumatic amplifier-cum-loudspeaker*. Can any reader recall its use or the use of any other type of loudspeaker in the general elections of 1922, 1923 and 1924?

Electrocussion

I WONDER if any of my medical readers can tell me if the human body acquires a tolerance of electric shocks in the same way as it does of certain drugs such as alcohol.

Everybody knows that it does not take much in the way of alcoholic refreshment to release the inhibitions of a teetotaller. A couple of drinks in a pub would cause him to exchange badinage with the barmaid and chuck her under the chin with a boldness that would make even a hardened drinker aghast. I am not a total abstainer but a very moderate drinker and I know the effects of that sort which a couple of drinks has on me.

The reason I am wondering if the body acquires a tolerance of electric shocks is that nowadays I find I am able to withstand shocks with a non-

chalance envied by many a leading light of the I.E.E. I have received a fair number of shocks, electric and otherwise, in the course of my life, and I am wondering whether my seemingly growing tolerance is real, or is it that with advancing years my skin is growing drier, or maybe my nervous system less sensitive.

To a large extent, of course, my tolerance of shocks is psychological. I have had plenty of them without any real harm, and therefore when I receive one I do not imagine I ought to lose consciousness or maybe die.



Badinage with the barmaid

Maybe I could eventually build up a sufficient psychological tolerance to continue living after being electrocussed (not electrocuted please) in the electric chair in Sing-Sing.

Unlike myself many people have been brought up to regard electric shocks as so lethal that when they receive what I would regard as a trivial one, they become really ill because, I suppose, their minds tell them they *ought* to be ill. I daresay that if many people, myself included, were given an injection of a few drops of distilled water but were told they were being given knock-out drops, they would lose consciousness.

However, I don't really know what I am talking about and that is why I ask for help from my medical readers.

Single-channel Stereo

THE cost of a stereogram for use with the new 3-D discs is necessarily rather high as almost everything except the cabinet has to be duplicated. I have, therefore, been racking my brains to see if I can devise a method of using one amplifier for both channels. Impossible, you say? Maybe so, but I am old enough to recollect the days when the price of valves was so high—to say nothing of the 12s 6d royalty on each valveholder in a set—that a way had to be devised of making one valve do the work of two. The result was the reflex receiver.

Now, we can't feed both stereo channels into one amplifier simul-

aneously but let us suppose we fixed up an automatic changeover switch working at, say, 50 "cycles" per second so that the input of the amplifier was connected first to one pick-up channel output and then to the other, and, of course, the amplifier output first to one loudspeaker and then to the other a few feet away. All we should get would be a horrible noise rather worse—if that be possible—than the wibbly-wobbly sound made by a cinema organ with the tremolo in use.

We could, of course, get rid of the wobble by using an electronic changeover switch working at super-sonic frequency of change. However, there would, I think, be no proper stereo effect but only a curious mixed sound, as our auditory perception would be too slow to "follow" the rapid changeover from one channel to the other.

To my mind, a better idea would be to stick to the lower frequency of 50 changes per second and try to get rid of the wobble by arranging that No. 2 channel was switched into circuit at the exact millisecond that No. 1 was switched out or even a millisecond or two before it was switched out, this would obviously mean that twice in each cycle of events both channels would be heard simultaneously for a millisecond or two. There would, therefore, still be a bit of a ukelele-like wobble, but look how many people like the sound of ukeleles and wobbly cinema organs. The whole thing would probably be a great hit and cheaper than true two-channel stereo.

Seff or Keff

I HAD occasion recently to attend one of the most famous of the London teaching hospitals for the purpose of having my brains tested or, in other words, to have an encephalographic examination. After having been unceremoniously bundled from pillar to post as seems to be the rule in all large establishments, medical or otherwise, I found myself in the chilling presence of one of those super-technical modern nurses who looked at me as if I were something unpleasant the cat had brought in.

In my confusion under her frigid gaze I mumbled something about an encephalograph examination, only to be implicitly corrected by this very superior daughter of Hippocrates as she repeated the word encephalograph with withering emphasis on the "k" which she substituted for the "c." This stung me to instant retaliation as I said "Yes, my local physician sent me."

If the medical profession really want to pronounce "c" as a "k" when used before "e" or "i" then let them *spell* it with a "k" as physicists do with kinetic, which, of course, belongs to the same family group as cinema.



A Good Sign ...

It is a good sign when such an old-established firm as AVO Ltd. adopt such advanced techniques as those in practice in their new dust-free air-conditioned zone.

It is under these ideal conditions of scrupulous cleanliness and controlled temperature and humidity that the world-famous instruments bearing the "AVO" sign are assembled, calibrated and tested.

To users of instruments, "AVO" is a good sign . . . a sign of dependability. To users of electrical appliances, "AVO" is a sign of the competence and discernment they look for in the manufacture of a product and in those who service it.

Model 8 Universal AvoMeter

A high-sensitivity version of the famous Universal AvoMeter—the world's most widely used multi-range electrical measuring instrument.

Fully descriptive brochure available on request.



To the whole world



is a good sign

AVO Ltd.

AVOCET HOUSE • 92-96 VAUXHALL BRIDGE ROAD • LONDON • S.W.1

Telephone: VICtoria 3404 (12 lines)



Radar 303

A COMPACT HIGH - PERFORMANCE INSTRUMENT FOR RESEARCH AND DEVELOPMENT LABORATORIES



Production Testing

Maintenance and Servicing

T.V. Service

Automatic Processing
Automobile Engineering
Biology
Computer investigations
Electro-mechanics
High-speed applications
Industrial Control

Low-speed phenomena
Nuclear Physics
Photography
Servo and Relay systems
Transistor applications
T.V. Servicing
Velocity Measurements

SPECIAL FEATURES

Linear time-base range from 3 seconds to less than a microsecond. Full 6 cm. trace at all frequencies. Continuous expansion gives 60 cm. effective trace length.

New sync. circuit holds the display rock-steady at all speeds. Frequent adjustment is unnecessary.

Push-pull signal amplifier of high sensitivity handles D.C. to 10 Mc/s. (-3db at 6 Mc/s.)

Frequency-compensated attenuator permits accurate voltage measurement from 50 mV to 600V.

Built-in integrator circuit allows rigid synchronisation from T.V. frame pulses.

Design and construction provide extreme accessibility. Any component part can be replaced without difficulty!

Valves situated at top of instrument and adequate ventilation avoids component changes due to excess heat.

Send for full technical leaflet

waveforms
LIMITED

Radar Works, Wallisdown, Bournemouth, Hants.

Winton 6606/7

Large Thyratrons for Power Control

Designers of a wide variety of electronic control equipment are turning more and more to thyratrons for power control.

The main reasons for this are:

- * Smooth and continuous control
- * Immediate response
- * Control power less than 0.1 watt
- * Ideal for automatic control

Advantages of Mullard Large Thyratrons

Mullard offer a comprehensive range of large thyratrons that embody many advantages:

- * **Advanced designs**

The range includes disc-seal thyratrons of extra rugged construction and with an improved hold-off voltage margin.

- * **Types for all applications**

Mercury and rare gas valves with maximum continuous current ratings from 1.6 amps up to 25 amps and covering a variety of applications in single and three phase working are available from Mullard.

- * **Long life**

Mullard large thyratrons are guaranteed for one year. Normal life expectancy is, of course, much longer.



Thyratrons for controlling A.C. or D.C. power for Motors, Lighting, Resistance Welders, Regulated Power Supplies and a variety of other power control applications.

Write for details of
"LARGE THYRATRON RANGE"

Mullard Limited
Mullard House
Torrington Place
London, W.C.1
Tel: LAngham 6833



Mullard

GOVERNMENT AND
INDUSTRIAL VALVE DIVISION



the name to remember for

INDUSTRIAL TYPE TRANSISTORS

BIDIRECTIONAL GERMANIUM TRANSISTORS

(Effectively symmetrical in significant parameters)

TYPES TK 20 B, TK 25 B

For high frequency switching circuits (8 Mc/s and above with the TK 25 B), or small signal amplification.

TYPES TK 21 B, TK 24 B

For intermediate frequency, high voltage switching circuits, or small signal amplification.

ASYMMETRICAL GERMANIUM TRANSISTORS

TYPE TK 23 A

For general purpose low and intermediate frequency applications, and telephone and telegraph carrier systems.

TYPE TK 40 A

For audio and intermediate frequency oscillators and amplifiers requiring high gain and a power output of several hundred milliwatts.

SILICON TRANSISTORS

TYPES TK 70 A, TK 71 A

For amplification, switching and control in extremes of ambient temperature; and having excellent saturation characteristics at high collector currents, unusual in silicon transistors.



Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

TRANSISTOR DIVISION: FOOTSCRAY · SIDCUP · KENT

Printed Circuit Counter Panels



A complete range of transistorized counter panels of common size, fixing method and electrical connexion, designed to provide a flexible unit system whereby any special requirements in the counting or data processing fields can be quickly built up.

A fully illustrated brochure giving complete performance and specification figures for every panel in the range is available on request.

50kc/s Scaler

1Mc/s Scaler

Input Amplifier

Gate Unit

10kc/s Oscillator

1Mc/s Oscillator

Power Unit

50kc/s Read-out Scaler

1Mc/s Read-out Scaler

4 Channel Output Unit

Read-out Unit

Meter Display Unit

Lamp Display Unit

Numerical Indicator Tube

Shift Register Stage

Shift Register Driver



RANK CINTEL LIMITED

Worsley Bridge Road · London · SE 26

Highther Green 4600

Sales and Servicing Agents: Atkins, Robertson & Whiteford Ltd. Industrial Estate, Thornliebank, Glasgow;
McKellen Automation Ltd., 122 Seymour Grove, Old Trafford, Manchester, 16; Hawnt & Co. Ltd., 59 Moor St. Birmingham, 4.

NEW!

DO-IT-YOURSELF TRAINING TECHNIQUE in RADIO & ELECTRONICS

You LEARN while you BUILD...

SIMPLE...PRACTICAL...FASCINATING...

ANNOUNCING—after many years of highly successful operation in the U.S.A. and in Europe—the latest system in home training in electronics is now introduced by an entirely new British training organisation.

AT LAST—a comprehensive and simple way of learning—by practical means—the basic principles of radio and electronics, with a minimum of theory.

YOU LEARN BY BUILDING actual equipment with the components and parts which we send you. You advance by simple steps using high quality equipment and performing a whole series of interesting and instructive experiments. No mathematics!

INSTRUCTION MANUALS and our teaching staff employ the latest techniques for showing clearly how radio works in a practical and interesting manner. You really have fun whilst learning! And you end by possessing a first rate piece of home equipment with the full knowledge of how it operates and—very important—how to service and maintain it afterwards. A full library of magnificent illustrated textbooks is included with the courses.

IN FACT, for the "Do-it-Yourself" enthusiast, the hobbyist, or those wanting help with their radio career training or to set up their own full or part-time servicing business—then this new and exciting instructional system is exactly what is needed, and it can all be provided at very moderate cost. Easy payments available. Post the coupon now, for full details. There is no obligation of any kind.

BUILD YOUR OWN:—

- RADIO EQUIPMENT ● HI-FI INSTALLATION
- TEST EQUIPMENT—
- AND LEARN AS YOU DO IT




RADIOSTRUCTOR

BRITAIN'S LEADING RADIO TRAINING ORGANISATION


LOTS OF INSTRUCTIVE EXPERIMENTS AT HOME!



Power supply circuits




Test equipment supplied



Amplifier, oscillator and detector circuits



Basic 1st stage receiver



Servicing of commercial receivers



No Mathematics!

To **RADIOSTRUCTOR** (Dept. G.34)
46 Market Place, Reading, Berks.

Please send full details of your Radio Equipment Courses without any obligation to:

Name _____

Address _____

BLOCK CAPS. PLEASE

(806)

We do not employ representatives

10.59

Be RIGHT on the job

with



A range of accurate and robust measuring instruments has been developed by Teleng - themselves possessing a wealth of experience in the design and installation of aerial, communal aerial or relay system equipment and cable networks.

MEASURING INSTRUMENTS

FOR TEST AND MAINTENANCE OF TV/FM RELAY SYSTEMS



TYPE 2

H. F. INDICATOR METER

- ★ 20 mV to 2.5 V (3-300 Mc/s) in three ranges.
- ★ Extreme accuracy over entire frequency range.
- ★ 1.5pf Shunt C at High Frequency.

Ideally suitable for H.F. Amplifier alignment and servicing and circuit investigation and measurement.



TYPE SL5

SIGNAL LEVEL METER

- ★ Robust, light and portable.
- ★ Built-in dry-cell power supply.
- ★ Transistorised H.T. Converter.
- ★ Range 25 μ V to 25mV in three ranges. With probe: 250 μ V to 250 mV.
- ★ Frequency coverage 40 to 220 Mc/s (Bands 1, 2 & 3) Turret Channel Selection.

Full lists and prices are readily available on request from:

TELENG LIMITED

TELENG WORKS, CHURCH ROAD, HAROLD WOOD, ROMFORD, ESSEX.

Tel: Ingrebourne 42901

NEW

ELAC

speakers

RETAIL PRICE LIST

TYPE	FLUX	POWER RATING PEAK	PRICE	P'TAX
8 x 3G	6500g	2.5 WATTS	19/6	6/3
8 x 3C	8500g	2.5 WATTS	22/6	7/3
7 x 4G	6500g	3 WATTS	18/6	5/11
7 x 4C	8500g	3 WATTS	21/6	6/11
5G	6500g	3 WATTS	18/6	5/11
5C	8500g	3 WATTS	21/-	6/9

TRADE DISCOUNT 33 $\frac{1}{3}$ %



8" x 3"



7" x 4"




5"

ELECTRO ACOUSTIC INDUSTRIES LTD., Stamford Works, Broad Lane, Tottenham, N.15.

Tel: Tottenham 0505/9 (5 lines)

INCOMPARABLE!



**"You've never seen
such beauty in an
autochanger before"**

The scintillating



Monarch U.A.12

Here's real achievement—a brilliant example of the designer's skill! Subtle styling—up to the minute in every detail—restrained yet exciting colour, clean sweeping lines, in the contemporary theme—that's the U.A.12. Its mechanical refinements give you the perfect performance you've been looking for. Like the famous U.A.8 it is built in the B.S.R. tradition of absolute reliability.

Ensure that the gram or player you buy is fitted with a Monarch.



SETS THE FASHION...GETS THE SALES!

BIRMINGHAM SOUND REPRODUCERS LTD., MONARCH WORKS, OLD HILL, STAFFS.



CINCH

again


point the way

with
'J' type
plugs and
sockets


The range of Cinch "J" type plugs and sockets includes 4, 8, 12 and 20 way types. Both plugs and sockets are suitable for cable connecting or for inter-chassis connection as unitors.

The specially designed contacts each have 12 resilient fingers which engage with the corresponding plug blade, resulting in high electrical efficiency matched by consistent smoothness of operation.

Suitable for soldered or wire-wrapped connections

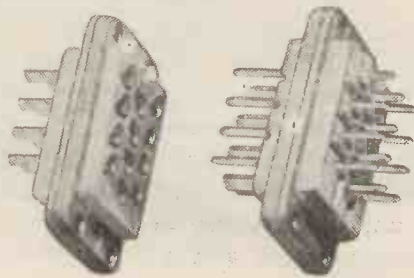

12 way Plug and Socket in Mikacin Moulding

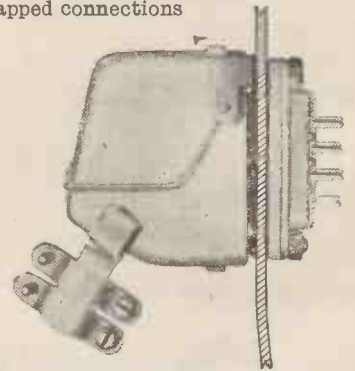

Plug and Socket complete with shell

CARR FASTENER CO LTD
STAPLEFORD · NOTTINGHAM
 LONDON: 197 Great Portland Street, W.1. Langham 3253/4/5



These kits are world-famous for their reliability and technical excellence

"GLOUCESTER" STEREO CABINET KIT

Will house Tape Deck and/or Record Player, F.M. Tuner and Stereo Amplifier. Storage space for records, tapes and power amplifiers. 46in. long, 30in. high, 21in. deep. "In the white" for finish to personal taste.

- Mk. 1 for Tape Deck or Record Player **£15.18.6**
- Mk. 2 for both Tape Deck and Record Player **£17.8.6**

"COTSWOLD" HI-FI SPEAKER SYSTEM KIT

Acoustically designed enclosure "in the white." 26in. x 25in. x 13in., housing a 12in. bass speaker with 2in. speech coil, elliptical middle speaker together with pressure unit to cover the full frequency range of 30-20,000 c/s. Complete with speakers, cross-over unit, level control etc. **£19.18.6**

ELECTRONIC SWITCH KIT Model S-3U (Oscilloscope Trace Doubler)

Enables a single-beam oscilloscope to give simultaneous traces of two separate and independent signals. Switching rates approx. 150, 500, 1,500, 5,000 and 15,000 c/s. Sig. freq. response 0-100 kc/s. \pm 1dB. Separate gain controls and sync. output. Sig. input range 0.1-1.8 v. r.m.s. **£9.18.6**

R.F. PROBE KIT Model 309-CU

Extends the frequency range of our V-7A to 100 Mc/s. and enables useful voltage indication to be obtained up to 300 Mc/s. **£1.5.6**

AMATEUR TRANSMITTER KIT Model DX-100U

Covers all amateur bands from 160-10 metres. Self contained including Power Supply, Modulator and V.F.O. **£78.10.0**

TRANSCRIPTION RECORD PLAYER Model RP-1U

4-speed A.C. motor. Ronette Stereo/Mono pick-up. Complete on plinth **£12.10.0**

CAPACITANCE METER KIT Model CM-1U

Direct-reading 4 1/2 in. scale. Full-scale ranges 0-100 μ F, 0-1,000 μ F, 0-0.01 μ F and 0-0.1 μ F **£14.10.0**

HI-FI STEREO AMPLIFIER KIT Model S-88

16 w. output. Ganged controls. Stereo/Monaural gram., radio and tape recorder inputs. Push-button selection. Two-tone grey metal cabinet **£25.5.6**

6-W STEREO AMPLIFIER KIT Model S-33

3 watts per channel, 0.3% distortion at 2.5 w/chnl., 20dB N.F.B. Inputs for Radio (or Tape) and Gram., Stereo or Monaural, ganged controls. Sensitivity 100 mV. **£11.8.0**

TRANSISTOR PORTABLE KIT Model UXR-1

Pre-aligned I.F. transformers, printed circuit and a 7in. high-flux speaker. Real hide case **£15.18.6**

"HAM" TRANSMITTER KIT Model DX-40U

From 80-10 m. Power input 75 w. C.W., 60 w. peak controlled carrier phone. Output 40 w. to aerial. Provision for V.F.O. **£29.10.0**

5in. OSCILLOSCOPE KIT Model O-12U

Has wide-band amplifiers, essential for TV servicing, F.M. alignment, etc. Vertical frequency response 3 c/s. to over 5 Mc/s. without extra switching. Covers 10 c/s. to over 500 kc/s. in 5 steps **£34.15.0**

VALVE VOLTMETER KIT Model V-7A

7 voltage ranges, d.c. volts to 1,500, a.c. to 1,500 r.m.s. and 4,000 peak to peak. Resistance 0.1 ohm. to 1,000 M. ohms with internal battery. Input impedance 11 meg-ohms. dB measurement has centre-zero scale. Complete with test prods, lead and battery **£13.0.0**

AUDIO SIGNAL GENERATOR KIT Model AG-9U

10 c/s. to 100 kc/s., switch selected. Distortion less than 0.1%. 10 v. sine wave output. Measures volts and dB's **£19.3.0**

RESISTANCE-CAPACITANCE BRIDGE KIT

Model C-3U Polarised 5-450 v. D.C. Measures power factor. Capacity 10 pF. to 1,000 μ F. Resistance 100 Ω to 5 M Ω . With safety switch **£7.19.6**



VF-1U



F.M. TUNER



DX-100U



S-88



UXR-1

● Please see last month's advertisements for fuller details of our kits ●

STEREO-HEAD BOOSTER KIT Model USP-1

Hi-Fi Stereo pre-amplifier for low output Hi-Fi P.U.'s. Input 2 mV. to 20 mV. Output adjustable from 20 mV. to 2 v. 40-20,000 c/s. **£5.19.6**

VARIABLE FREQUENCY OSCILLATOR KIT Model VF-1U

From 160-10 m. Ideal for our DX-40U and similar transmitters. Price less valves **£8/19/6.**

HI-FI SPEAKER SYSTEM KIT Model SSU-1

Ducted-port bass reflex cabinet "in the white." Twin speakers. With legs **£10.5.6**

DUAL-WAVE TRANSISTOR RADIO KIT Model UJR-1

This sensitive headphone set is a fine introduction to electronics for any youngster **£2.16.6**

★ FREE ON REQUEST! A copy of our (British) Heathkit Catalogue. Prices include free delivery U.K. Deferred terms available.

HI-FI F.M. TUNER

Tuning range 88-108 Mc/s. For your convenience this is available in two units sold separately as follows:
Tuner Unit (FMT-4U) inc. P.T. **£3. 2.0**
I.F. Amplifier (FMA-4U) complete with case and valves. **£10.10.6**

TOTAL **£13.12.6**

MATCHED HI-FI STEREO KIT

We offer as a "packaged deal" the following matched Hi-Fi Stereo Equipment.

- 4-speed Record Player (RP-1U) **£12.10.0**
- 6-W Amplifier (S-33) **£11. 8.0**
- Twin Speaker System (SSU-1) **£20.11.0**
- Cost of Units **£44. 9.0**

At an "all-in" price of **£42.10.0** Pedestal speaker legs **£2/14/-** optional extra.

Please tick the items in which you are interested and we will send you full details.

<input type="checkbox"/>	S-88	Hi-Fi Stereo Amplifier Kit
<input type="checkbox"/>	S-33	6-Watts Stereo Amplifier Kit
<input type="checkbox"/>	UXR-1	Transistor Portable Kit
<input type="checkbox"/>	DX-40U	"Ham" Transmitter Kit
<input type="checkbox"/>	O-12U	5in. Oscilloscope Kit
<input type="checkbox"/>	V-7A	Valve Voltmeter Kit
<input type="checkbox"/>	SSU-1	Hi-Fi Speaker System Kit
<input type="checkbox"/>	AG-9U	Audio Signal Generator Kit
<input type="checkbox"/>	C-3U	Resistance-Capacitance Bridge Kit
<input type="checkbox"/>	VF-1U	Variable Frequency Oscillator Kit
<input type="checkbox"/>	USP-1	Stereo-Head Booster Kit
<input type="checkbox"/>	UJR-1	Dual-Wave Transistor Radio Kit
<input type="checkbox"/>	DX-100U	Transmitter Kit
<input type="checkbox"/>	S-3U	Electronic Switch Kit
<input type="checkbox"/>	FM-4U	F.M. Tuner
<input type="checkbox"/>		Matched Hi-Fi Stereo Kit. Complete
<input type="checkbox"/>		"Gloucester" Stereo Cabinet Kit
<input type="checkbox"/>		"Cotswold" Hi-Fi Speaker System Kit
<input type="checkbox"/>	309-CU	R.F. Probe Kit
<input type="checkbox"/>	RP-1U	Transcription Record Player
<input type="checkbox"/>	CM-1U	Capacitance Meter Kit.

DAYSTROM LTD.

DEPT. W.W.10, GLOUCESTER, ENGLAND


A member of the Daystrom Group, Manufacturers of

THE WORLD'S LARGEST-SELLING ELECTRONIC KIT-SETS

Please print name and address in margin below. W.W.10

CAMBRIDGE

Centre of Scientific Research

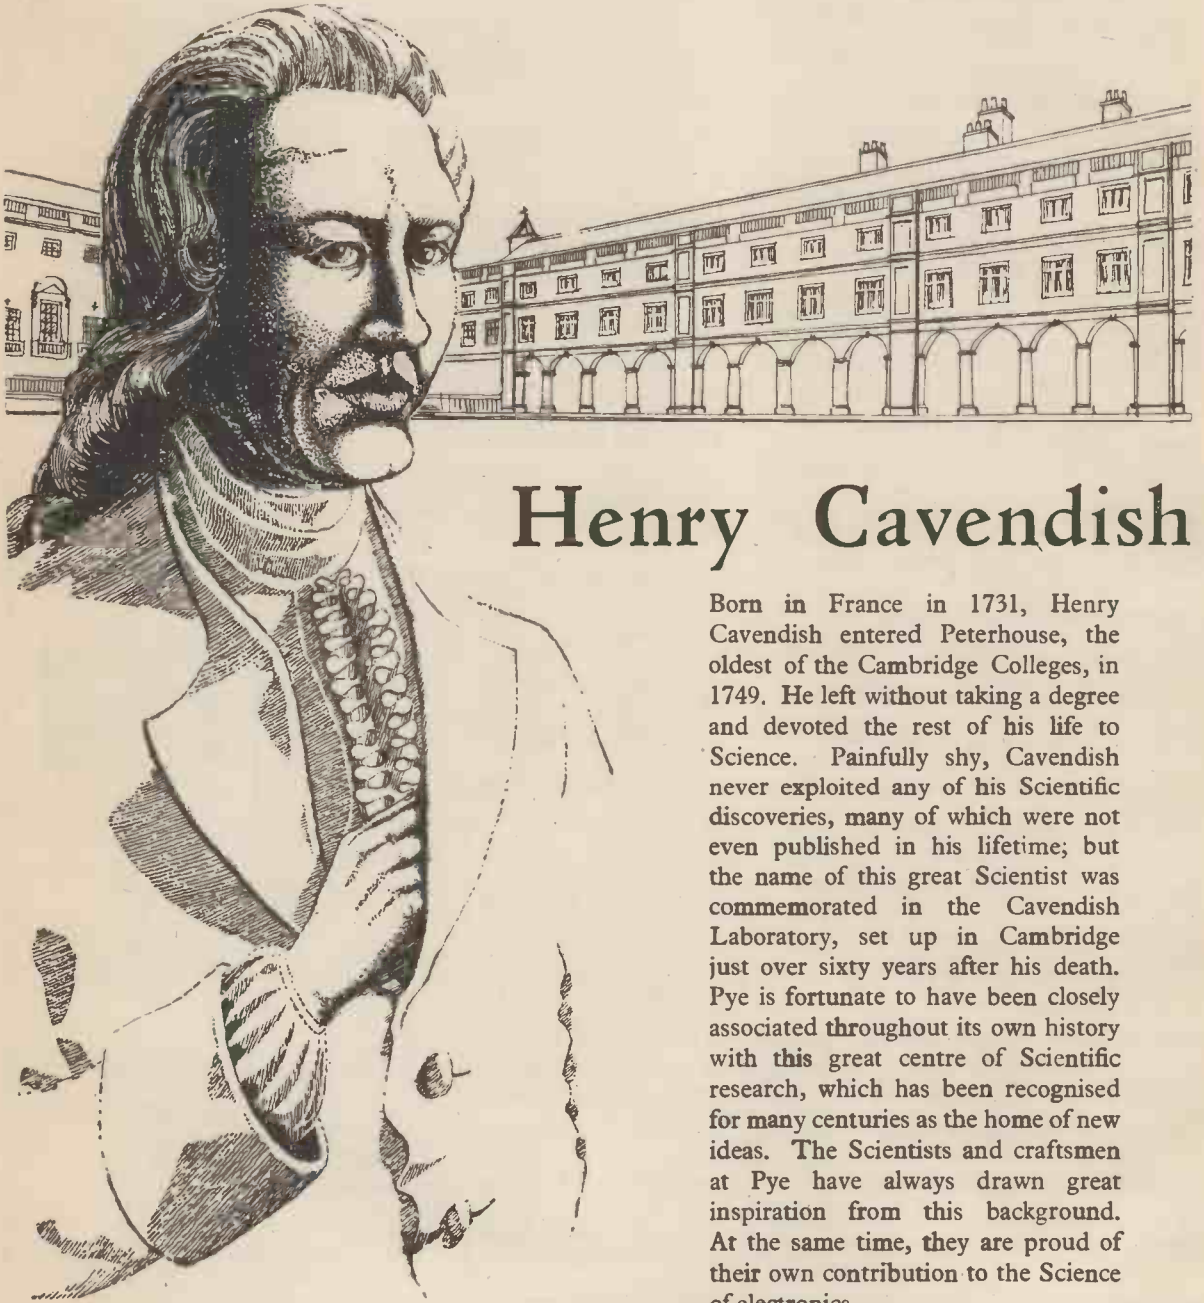

Henry Cavendish

Born in France in 1731, Henry Cavendish entered Peterhouse, the oldest of the Cambridge Colleges, in 1749. He left without taking a degree and devoted the rest of his life to Science. Painfully shy, Cavendish never exploited any of his Scientific discoveries, many of which were not even published in his lifetime; but the name of this great Scientist was commemorated in the Cavendish Laboratory, set up in Cambridge just over sixty years after his death. Pye is fortunate to have been closely associated throughout its own history with this great centre of Scientific research, which has been recognised for many centuries as the home of new ideas. The Scientists and craftsmen at Pye have always drawn great inspiration from this background. At the same time, they are proud of their own contribution to the Science of electronics.



Pye Limited of Cambridge England

Hi-light of hi-fi

The Brenell 3 STAR



To own a Brenell tape recorder is to be assured of quality performance, a sound engineering job and a British made product of outstanding design



3 STAR PORTABLE: Before you finally decide on the type of recorder you want, make a special point of seeing and hearing the Brenell 3 Star. Examine its well-thought out design which has been based on almost 10 years' exhaustive manufacturing experience—consider its many fine features which include three recording speeds with frequency compensation at all speeds, push button control (interlocked for safety); printed circuit amplifier; separate bass and treble controls; high quality loudspeaker (8in. x 5in.); takes spools up to 7in.; pause control; digital revolution counter; contemporary style wooden cabinet for improved acoustic performance—judge its hi-fi reproduction. Once you have seen the 3 Star in action you'll find it very difficult indeed to find anything to equal this truly remarkable machine in value for money.

PRICE
58
GNS.

including 1,200ft. of tape, spool and microphone.

Also available, the Mk. 5 Tape Deck, Mk. 5 record playback amplifier. Mk. 5 portable tape recorder and stereophonic equipment. Leaflets on request

GD21

Sole manufacturers:


**BRENELL
ENGINEERING CO. LTD.**

Brenell PERFORMANCE IS TRUE-TO-LIFE PERFORMANCE

**1a, DOUGHTY STREET,
LONDON, W.C.1.**

Telephone: HOL 7358 & CHA 5809

Emitape

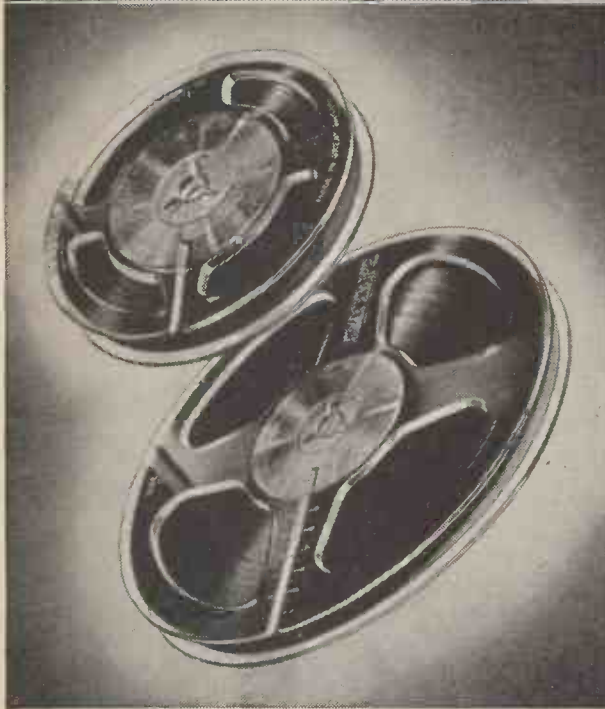

the magnetic recording
tape with the highest
technical standards

- * High sensitivity
- * Low noise level
- * Low 'print through' factor
- * Anti-static
- * Freedom from curl
and stretch

88 GENERAL
PURPOSE

99 LONG
PLAY

Type No.	Title	Size	Length approx.	Price in EMICASE	Price without EMICASE
88/3	"Message"	3" dia.	175'	—	7 6
99/3		3" dia.	250'	—	9 6
88/3N		3½" dia.	175'	—	7 6
99/3N		3½" dia.	250'	—	9 6
88/6	"Junior"	5" dia.	600'	£1 3 6	£1 1 0
99/9		5" dia.	850'	£1 10 6	£1 8 0
88/9	"Continental"	5½" dia.	850'	£1 10 6	£1 8 0
99/12		5½" dia.	1200'	£1 17 6	£1 15 0
88/12	"Standard"	7" dia.	1200'	£1 17 6	£1 15 0
99/18		7" dia.	1800'	£2 12 6	£2 10 0
88/18	"Professional"	8½" dia.	1750'	—	£2 17 6
99/24		8½" dia.	2400'	—	£3 12 6



Emicase

now available separately!

the polystyrene container that solves tape storage problems, protects spools from dust and allows easy identification of leader tapes.



7" - 4s. 0d; 5½" - 3s. 6d; 5" - 3s. 6d.

E.M.I SALES & SERVICE LTD
(Recording Materials Division)
HAYES, MIDDLESEX
Tel: SOUTHALL 2468

No. 17



**Permanent
Magnets**


**Design
Advisory
Service**

Microwave Applications—2

Advertisements in this series deal with general design considerations. If you require more specific information on the use of permanent magnets, please send your enquiry to the address below, mentioning the Design Advisory Service.

The performance of many modern radar and communication systems has been improved by introduction of unidirectional components utilising the gyromagnetic properties of materials at microwave frequencies. In most of these components the material (ferrite or garnet) is immersed in the microwave field within a waveguide and is at the same time polarised by an externally applied magnetic field of considerable stability and uniformity. The latter can generally be obtained by the use of high energy permanent magnets such as 'Ticonal'. Sometimes magnets having an unusually high coercivity and resistivity are required, and then ceramic magnets such as 'Magnadur' are preferable.

One type of microwave ferrite component is the isolator which is used to introduce unidirectional absorption into microwave circuits. One design of this employs the electron spin resonance characteristics of ferrite materials. These transversely polarised resonance isolators, as they are called, can be used for high or low power operation. A typical arrangement of the latter type, designed for operation in the X band and weighing approximately 1 lb., is shown in the photograph.



A sectioned Isolator

The Ferroxcube sliver is positioned so that the magnetic field in it, due to the wave, is circularly polarised. Resonance absorption is then dependent on the sense of rotation, which is clockwise for a wave travelling in one direction and anti-clockwise for a wave travelling the opposite direction and hence a unidirectional effect is obtained.

For high power isolators, the thermal conductivity of the thin Ferroxcube sliver is in-

If you wish to receive reprints of this advertisement and others in this series write to the address below.

sufficient to dissipate the absorbed power at resonance, and an alternative arrangement may be used whereby in place of the sliver two short slabs of Ferroxcube are cemented directly to the wave guide walls. This arrangement requires a higher applied field due to the air gap between the slabs, but this disadvantage is partly compensated by the fact that the maximum forward attenuation may be lower so that larger isolation ratios are obtained.

'Ticonal' G magnets similar in shape to the one shown may be used for both high and low power resonance isolators, but this recommendation is dependent on the frequency ranges. With large waveguides such as WG10 the higher reluctance in the magnetic circuit will cause a substantial proportion of the total flux to take leakage paths thereby requiring the use of a larger magnet. For example, the total weight of an isolator of this type in the S-band is approximately 30 lb.

Another type of isolator employs the Faraday rotation effect. Here a Ferroxcube rod is placed along the axis of a cylindrical guide, and ring magnets, usually 'Magnadur', are placed around the guide to produce a uniform axial field of relatively low intensity along the length of the rod. This arrangement produces a 45° rotation of the plane of polarisation of a wave travelling along the guide, the direction of rotation being independent of the direction of propagation of the wave. A wave returning along the same waveguide will undergo an additional 45° change so that it becomes cross polarised, at the input to the forward wave and can be absorbed in an attenuating vane, placed parallel to the electric field.

A similar class of component is the circulator, and in one of these the attenuators of the Faraday Rotation isolator are replaced by suitably positioned 'pick-off' lines, so that the returning wave can be separated from the input wave and usefully employed.

Many other microwave components and devices exist which make use of the gyromagnetic effect of ferrite materials, and most of these normally incorporate 'packaged' permanent magnets.

Mullard



'TICONAL' PERMANENT MAGNETS
'MAGNADUR' CERAMIC MAGNETS
FERROXCUBE MAGNETIC CORES

NEW 20,000 o.p.v.!

Pocket Size

Model '127A' TAYLORMETER

PERFORMANCE EQUAL TO A HIGH PRICED INSTRUMENT

OUTSTANDING FEATURES:

- ★ Sensitivity 20,000 o.p.v. DC, 1,000 o.p.v. AC
- ★ Very robust—shock proof moulding
- ★ Portability
- ★ 20 Ranges
- ★ DC Current: 50 μ A, 1mA, 10mA, 100mA, 1 Amp.
- ★ Volts DC: 0-3, 2-5, 10, 25, 100, 250, 1,000V (25 kV by probe).
- ★ Volts AC: 10, 25, 100, 250, 1,000
- ★ 3 Resistance Ranges: from 0-20 megohms (self-contained)
- ★ 40 μ A Meter 3 $\frac{1}{4}$ " arc
- ★ Accuracy: DC 3% AC 4% Ohms 5%
- ★ Dimensions: 5 $\frac{3}{4}$ " x 3 $\frac{3}{4}$ " x 1 $\frac{3}{4}$ "
- ★ Weight: 14oz.



LIST PRICE **£10 - 0 - 0**

Hire Purchase or Credit Terms available.

Write for full details and free catalogue



TAYLOR ELECTRICAL INSTRUMENTS LTD.,

Montrose Avenue, Slough, Bucks.

Telephone: Slough 21381 Cables: Taylins, Slough

Member of the METAL INDUSTRIES GROUP OF COMPANIES



Bellows technology



The Drayton catalogue gives full technical information on the physical and mechanical properties of Hydroflex seamless Metal Bellows. Separate sections are devoted to typical designs, the soldering of assemblies and the prediction of life under various operating conditions. Your copy is available on application to Dept. WW

HYDROFLEX

seamless Metal Bellows



DRAYTON REGULATOR & INSTRUMENT CO. LTD., WEST DRAYTON, MIDDX.

B26
West Drayton 4012

"PLUG-IN"

3000 TYPE RELAY

**WITH
TRANSPARENT
DUST
COVER
AND
PLUG-IN
BASE**



Pat. No. 38370/57

SIZE OF BASE
2½" x 1½" x ½"

CAN NOW BE SUPPLIED AS FOLLOWS:-

A.I.D. A.R.B.
**ADMIRALTY
APPROVED**
3000 & 600 TYPE RELAYS

6 CHANGE-OVERS LIGHT DUTY. 6 MAKES OR 6 BREAKS HEAVY DUTY.
2 CHANGE-OVERS HEAVY DUTY AND 2 CHANGE-OVERS LIGHT DUTY.

TRANSISTORISED TO OPERATE AS LOW AS 3 MICRO-AMPS.

A.C. OPERATION FOR 6V, 12V, 24V, 50V, 110V AND 250V A.C.

DOUBLE WOUND COILS. P.T.F.E. INSULATION.
OPERATE AND DELAY UP TO 5 SECONDS.

A.D.S. RELAYS LTD

89-97, ST. JOHN STREET, CLERKENWELL, E.C.1

Telephone: CLerkenwell 3393/4/5

A NEW CONCEPT



IN POT CORE DESIGN



VINKOR

Mullard range of
adjustable pot cores gives you

***outstanding* advantages**

- Wide range of sizes
- Easily assembled
- Close tolerance permeability
- Precise and easy inductance adjustment
- Stability
- Single hole chassis mounting

Mullard Vinkors are the most efficient adjustable pot core assemblies commercially available. In addition to high performance, they have the distinct advantage of close tolerance permeability, thus enabling designers to precalculate to within $\pm 3\%$ the inductance of the core when wound. Final adjustment, taking into account normal capacitor tolerance, can be easily effected to an accuracy of better than 0.02%, by means of a simple self-locking device built into the core.

Write today for full details of the wide range of Vinkors currently available.

Mullard

VINKOR POT CORES



MULLARD LTD · COMPONENT DIVISION · MULLARD HOUSE · TORRINGTON PLACE · LONDON W.C.1

MC 2807

TELEFUNKEN

VALVES

HIGH QUALITY-HIGH OUTPUT

**AT REDUCED PRICES GIVE
THE RETAILER NEARLY**

**50% MORE
PROFIT**

ON TOTAL OUTLAY

So in buying top quality and matchless reputation, you lay out less money and make more profit. It's just plain common sense to prefer TELEFUNKEN!

From your wholesaler, or from the sole British Distributors for all Telefunken Radios, Radiograms, Record Players, etc.:—




**THE NEW
PRICE LIST OF
TELEFUNKEN
VALVES CAN
BE OBTAINED
FROM TELLUX
LTD OR YOUR
WHOLESALER**

All valves have usual full guarantee

TELLUX LTD

Member of the K.G. (Holdings) Group of Companies 146 NEW CAVENDISH STREET • LONDON, W.1

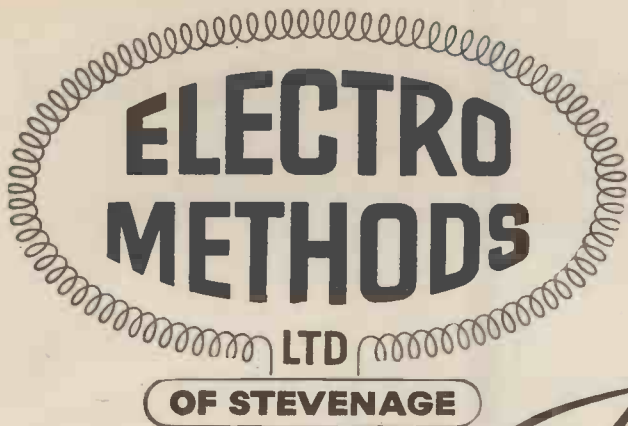


Announce

printed circuit connectors

for the

0.1" INTERNATIONAL STANDARD GRID

Made under U.S. licence from Winchester Electronics Inc.

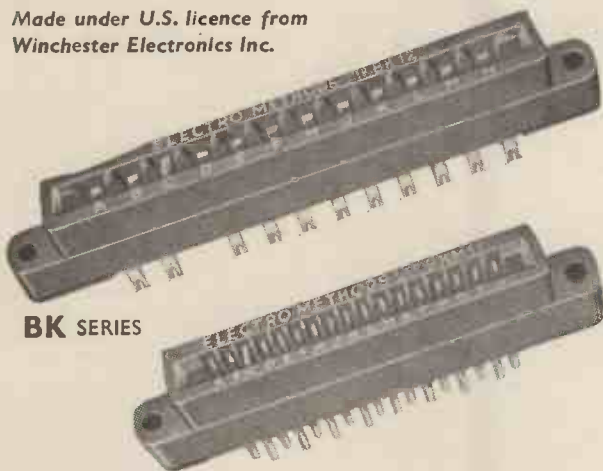

BK SERIES

BKM SERIES

These precision printed-circuit connectors have gold-plated contacts (made from spring-tempered phosphor-bronze) which provide low contact-resistance, prevent corrosion and facilitate soldering. Melamine mouldings, conforming to B.S.S. 1322, provide high arc-resistance, and high dielectric and mechanical strength.

SOCKET CODE No.	NUMBER OF CONTACTS	CONTACT SPACING
BK 8	8	0.2"
BK 12	12	0.2"
BKM 17	17	0.1"
BKM 25	25	0.1"
BKM 17-8	8	0.2"
BKM 17-9	9	0.2"
BKM 25-12	12	0.2"
BKM 25-13	13	0.2"

NOW AVAILABLE



Type D2 two-pole Stackable Connector

- ★ Alternative contact arrangements
- ★ Self-polarising stacks
- ★ 0.3" centres for 0.1" Grid applications

Full technical data and illustrated leaflets forwarded on request :-

ELECTRO METHODS LTD.

Plug & Socket Division,
12-36 CAXTON WAY,
STEVENAGE, HERTS.

Telephone: Stevenage 2110-7

AMPLIFIERS that are acclaimed

The British public saw the Leak stereo equipment for the first time at the London Audio Fair and now it is in full production. The "Point One Stereo" pre-amplifier is designed so that it can be used either with the new "Stereo 20" or the "Stereo 50" power amplifiers, or with two of the earlier Leak monaural power amplifiers such as the TL/12, TL/10, TL/12, Plus, TL/25 Plus and the TL/50.

The "Point One Stereo" pre-amplifier is probably the most comprehensive unit in existence covering every requirement for stereo tape, disc and radio plus monaural amplification for any form of input signal. The external design has been left in the capable hands of R. Lonsdale Hands Associates and follows the same pattern as expressed in the previous "Point One" monaural pre-amplifier. The front panel is tastefully styled in brown with gold linings, and at the rear of the transparent panel are the dial indications. The control knobs are cream with a raised pointer and gold anodised inserts. The dimensions of the front panel are 11½ in. by 4½ in., whilst the completely screened chassis requires a panel cut-out of 10½ in. by 3½ in. When mounted on a panel the unit is retained in position by means of a "U" section strip.

On the front panel there are five main controls with two smaller control switches. The knobs reading from left to right are: (1) a five-position selector switch for tuner tape, pick-up input, extra and microphone; (2) bass boost and cut variable control; (3) treble boost and cut variable control; (4) variable balance control; and (5) on/off switch and volume control. The two smaller switches select reverse, stereo, right, left and monaural and the second switch is a rumble cut control.

At the rear of the chassis are the inputs for pick-up, tuner and extra each fed via a twin-ganged level setting potentiometer. There are also stereo inputs for tape and microphone but the output from these sources do not have an input potentiometer. In addition there are output sockets not controlled by the ganged output potentiometer, and a single monaural output that follows the output potentiometer. Further there is the octal output socket for the power supply lead and a separate two-pin 5 amp. socket for the mains input supply. All the input and output connections are made by means of screened coaxial plugs and sockets and it is of interest that no screened leads are used inside the chassis.

The "Point One Stereo" pre-amplifier consists of two identical circuits housed in one container each using a two-stage amplifier. Except for the controls on the front panel and the thirteen screened sockets and potentiometers on the rear, the remainder of the circuit is mounted on a substantial high-grade paxolin-type panel. On the underside of this panel are mounted all the fixed capacitors and resistors by means of soldering lugs, whilst on the upper side are mounted the valve holders with retaining clips and the inter-circuit wiring. In order to maintain identical conditions in each amplifier close tolerance components are used. The seven double-ganged potentiometers are carefully checked for accurate tracking by a special instrument designed by Harold Leak which ensures that the two potentiometer sliders are accurate within 2-3 per cent.

The ganged selector switch feeds the appropriate input signal via the five-position function switch to the first stage valve which is a Mullard EF86. The stage is R.C. coupled to the following stage, and ganged to the input selector switch is an additional wafer that alters the frequency response by means of a negative feedback circuit. The variable bass and treble controls are in the input circuit of the second EF86 valve and again form part of a negative feedback system. The volume control is placed across the output of the second stage together with the balance control. Between these two ganged potentiometers is the rumble control switch that limits the bass response. As is customary with Leak amplifiers the layout of the chassis is exemplary and the wiring and soldering extremely neat.

The steel metalwork is passivated and externally finished with a hard-baked gold/brown enamel. There is a loose top and bottom cover plate held in position with self-tapping screws and removal of these panels gives easy access to every part of the circuit.

TEST REPORT By



J. C. GILBERT,
F.R.S.A., Assoc. I.E.E., M.Brit. I.R.E., F.T.S.

reprinted by kind permission of the publishers of the "Music Trades Review"

THE "STEREO 20" POWER AMPLIFIER

Again this consists of duplicated amplifiers similar in design to the TL/12 Plus with the difference that the power supply is common to both amplifiers. It consists of a rectangular chassis measuring 10½ in. by 12½ in. with an overall height of 7 in., and weighs 22½ lb. The identical circuits are split lengthwise along the chassis on which is mounted the mains transformer, output transformers, electrolytic condensers and valve holders. All the coupling resistors and capacitors are mounted on a high-grade paxolin board by means of soldering lugs. At the input end of the chassis is mounted an octal socket for the power supply to the pre-amplifier and the signal output from the pre-amplifier. Also very close to the input stage are a pair of coaxial sockets that can be used for any additional stereo or monaural input with a signal level around 125 mV. At the opposite end of the chassis are mounted two screw connectors for the stereo loudspeaker leads, the A.C. power three-pin socket, and a pair of A.C. outlets which are limited to 100 watts and are used for the power supply to gramophone motors, self-powered tuner units, etc. The on/off switch on the pre-amplifier does not control these two sockets.

The amplifier circuit consists of one half of a Mullard ECC83 triode that is resistance-capacity coupled to a phase-splitting ECC83 which is in turn resistance-capacity coupled to two Mullard EL84 tetrode power valves connected as an ultra-linear circuit. Negative feedback is taken from the secondary winding of the output transformer to the cathode circuit of the first valve. The output transformer has a tapped secondary winding suitable for use with 4, 8 or 16 ohm impedance loudspeakers. The power transformer is massive and has three input voltage tappings for 200/210 volts, 220/230 volts and 240/250 volts at 50 c/s. The mains rectifier is a Mullard GZ34 which is used with high capacity electrolytic capacitors and resistors for efficient smoothing.

Again the chassis is made from steel and passivated overall. The top and sides are finished in gold/brown stove enamelling. Every part of the power amplifier is very accessible and the wiring and soldering above criticism.

TEST REPORT

The main amplifier was comprehensively tested to confirm the manufacturer's specification. The amplifier was terminated with a resistive load of 16 ohms across the whole of the secondary winding of the output transformer. Also connected to the dummy load was a Cossor 1049 double-beam oscillograph

and a Marconi instruments distortion factor meter. The input signal was derived from a Dawe resistance-capacity oscillator together with the second beam of the oscillograph, thus giving a direct visual comparison between input and output signals. Also an Airmec valve millivoltmeter was connected to the input of the amplifier, whilst the signal from the resistance-capacity oscillator was taken through a Dawe calibrated microvoltmeter. The makers claim of 11 watts continuous rating was confirmed which required an input voltage on one channel of 108 mV., whilst the second channel required 113 mV. for the same output. In view of the fairly wide tolerances in valves, although close tolerance resistors and capacitors are used these figures are remarkable, and due to the use of an adequate amount of negative feedback. With a continuous output of 11 watts the hum level was measured to be 78 dB below 11 watts, this figure also including valve and circuit noise. The damping factor which is the relationship between the output impedance of the amplifier compared to the load resistor has the commendably high figure of 25. All the above figures were measured at a frequency of 1,000 c/s.

The frequency response of the main amplifier was next checked and easily fell within the maker's figures of being within 0.5 dB from 20-20,000 c/s. There is still a considerable output at 30 Kc/s, which is approximately one octave above the keenest ear. The power response curve was then taken with a datum figure of 10 watts at 1,000 c/s, and then a variable frequency constant amplitude signal applied to the input. At 20 c/s the measured power output was 9.7 watts rising to 10 watts at 32 c/s. The power output remained constant until 18,500 c/s when it slowly dropped to 9.5 watts at 23 Kc/s. In all cases the amplifier did not introduce more than 0.1 per cent. harmonic distortion under maximum power conditions at all frequencies. Sinusoidal input signals give little information regarding the transient response of amplifiers, and hence some measurements were taken with the aid of the latest Hewlett-Packard square wave generator that is capable of supplying pulses from 1-1,000,000 repetitions/sec. From 20 pulses/sec. and viewed with a Cossor Model 1035 oscillograph, a substantially rectangular waveform was observed. As it is necessary to transmit at least up to the twentieth harmonic in order to see a rectangular waveform after passing through an amplifier system a test was made with a pulse frequency of 1,000. Again this was well reproduced, indicating that not only is the Leak Stereo amplifier capable of handling sinusoidal waveforms without measurable distortion, but it can easily handle transients that occur in music and speech.

The above-mentioned tests were made on each channel and then with the two channels in parallel to see whether the parallel connections would have any effect on performance. Except that the power output doubled there was no other measurable effect.

The "Point One Stereo" pre-amplifier was also measured in terms of sensitivity per channel, frequency response and the coverage of tone controls. With the output from the Dawe resistance-capacity oscillator connected to the tuner inputs the bass control was checked to give a maximum boost of 17 dB at 30 c/s and a cut of 15 dB compared with the zero setting. The treble control gives a boost of 15 dB at 20 Kc/s compared to 1 Kc/s and a cut of 14 dB. With the two controls set at their zero positions the characteristic is substantially flat from 20-20,000 c/s, the rumble filter being out of circuit. If, due to the use of a gramophone turntable that generates rumble, the filter must be used then there is a fairly rapid fall in bass response below 65 c/s.

It is the overall sensitivity figures that distinguishes this pre-amplifier over alternative types. With a measured output voltage of 125 mV., the voltage required to fully load the main amplifier, the following input voltages were required at 1 Kc/s. Tape 3.5 mV. across 100,000 ohms, microphone 3.2 mV. across 100K, tuner 48 mV. across 100K, extra input 48 mV. across 100K and pick-up 4.8 mV. across 75,000 ohms. One interesting difference between this stereo pre-amplifier and earlier

throughout the world

Leak pre-amplifiers is that there is only one pick-up position that is corrected to the international R.I.A.A. standard curves. These are the curves adopted for the recording of stereo discs, but where single channel records are played the coverage of the bass and treble controls adequately covers the small differences in recording characteristics. Similarly the characteristic adopted for tape follows the C.C.I.R. recording curve which is now internationally used.

PERFORMANCE POINTS

Although all these engineering facts are of great interest to the designer and technicians, the ultimate requirement is the overall performance as part of a composite system. Measurement figures can convey a considerable amount of valuable information, and can be useful in analysing a complete system, for with modern test apparatus the measurements can be extremely accurate. Measurements of other parts of the system are more difficult and in the case of loudspeakers seldom convey much useful information.

The Leak pre-amplifier and power amplifier were used for listening tests with a pair of Whitely senior column loudspeakers covering bass, middle and upper registers, and a pair of Kelly ribbon speakers to cover frequencies in excess of 5 Kc/s. The input signal was taken either from an E.M.I. stereo tape deck using only its matching transformers or from stereo discs using either an Elac or Tannoy stereo cartridge mounted in a Goldring GL60 arm. For monaural radio input a R.C.A. frequency modulated tuner was used. By means of the pre-set potentiometers at the rear of the pre-amplifier the input signals were all set to approximately the same level.

The function switch is a most useful device in setting up the system for not only does it reverse the two input signals, but it will also select either the left or right channel, or place both in parallel when reproducing monaural records, thus giving a total power output of about 22 watts. With adequately screened leads and signal sources the hum level was below audibility with the volume control at its maximum setting, and there was only the faintest suspicion of hum when the bass control was turned to its maximum boost. With any of the high sensitivity inputs such as tape or disc there is a small amount of inherent "hiss" which is due to the very high overall sensitivity and the Schott effect in the input circuit of the first valves. Under listening conditions it is, however, for all practical purposes, inaudible.

A special test tape was used to check the overall signal sensitivity including the loudspeakers, and the balance control adjusted to give a similar audible level for each channel. Test records established that the inner and outer walls of the record groove were connected to the appropriate loudspeaker, and many enjoyable hours were spent in listening to stereophonic reproduction at its best. Every control functioned exactly as it should, and even in a large room there is a great reserve of power. Probably one of the finest recent stereo recordings is the last act of Wagner's *Die Walküre*, with Kirsten Flagstad—a Decca recording. This recording, using the Tannoy stereo pick-up, brings grand opera right into the home, for one has the sense of movement about the stage with the orchestra playing in the foreground. Using stereo tapes one has a slightly better dynamic range and a more quiet

background, and again the Leak equipment could be fully loaded from the output from the stereo heads plus transformers. In the past one has always felt that a tape pre-amplifier would be required to raise the signal level to a usable amount and to compensate for the recording characteristics. The Leak pre-amplifier being fully compensated to the C.C.I.R. characteristic, and having a high overall sensitivity overcomes one of the major problems of enthusiasts who wish to play pre-recorded stereotape, for now one only requires a suitable deck such as the Ferrograph, Truvox or Bradmatic.

With the wide range of input and output facilities offered with the Leak equipment it is difficult to think of any additional requirement that one would ever wish. The equipment performs with the high performance always associated with the tradition of Leak equipment. It is a fine example of design and construction and the pre-amplifier can be used with any other Leak main amplifiers. How the pre-amplifier can be sold for as little as £21 can be answered only by Harold Leak, and one can safely purchase this equipment with the knowledge that it will not be superseded for several years. If and when the B.B.C. introduce stereophonic broadcasting in whatever form it takes, the Leak "Point-One Stereo" pre-amplifier will faithfully handle the signal. In the U.S.A. there are several systems in operation on an experimental basis for which this equipment would appear ideal.

Summing up, therefore, one can highly recommend the Leak stereo system for use with any current monaural or stereo input whether it be from pick-up, tape, radio or microphone.

£21:0:0


... a price made possible only by world-wide sales



STEREO 20 amplifier 29 GNS



TL/12 PLUS amplifier 18 GNS

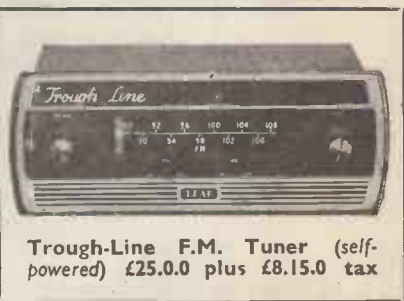

Trough-Line F.M. Tuner (self-powered) £25.0.0 plus £8.15.0 tax



... the first name in High Fidelity since 1934

H. J. LEAK & CO. LTD., BRUNEL ROAD, WESTWAY FACTORY ESTATE, LONDON, W.3
Telephone: SHEpherds Bush 1173/4/5

Fill in coupon for further information on Leak amplifiers.

Please send me Brochures

NAME

ADDRESS

W.W 10.59

Telegrams: Sinusoidal, Ealux, London



FERRANTI

X-BAND FERRITE CIRCULATOR

A compact three port circulator capable of handling 50 kW peak, 50 watt mean. It can be pre-set to cover a bandwidth of 400 mc/s in the 3 cm. band. The magnetic field is supplied by permanent magnets. The total weight of the component is approximately 4½ oz.

X-BAND FERRITE ISOLATORS

Type 2F/2. 100 kW peak, 100 watt mean.
Type 2F/3. 200 kW peak, 200 watt mean.
Isolation in both cases greater than 20 db over a bandwidth of 1000 mc/s with an insertion loss of less than 1 db.

X-BAND FERRITE SWITCH TYPE 3F

Frequency 9600 to 9800 mc/s. Peak attenuation 30 db min. Insertion loss .5 db max. Power handling capacity 30 watts. Weight 3 oz.

FERRANTI LTD



KINGS CROSS ROAD · DUNDEE

Telephone : DUNDEE 87141

HIGH QUALITY SPEAKERS with foam surrounds

by **WHARFEDALE**

HERE ARE FIVE FROM THE LARGE RANGE
OF MODELS IN PRODUCTION

COAXIAL 12

COMPLETE WITH
TWEETER VOLUME CONTROL

SPECIFICATION

MAIN CONE

Magnet gap diameter, 1½ in.
Flux density, 14,000 gauss.
Total Flux, 155,000 maxwells.
Foam surround. Copper voice coil. Fundamental resonance 25-30 c/s.

TWEETER ASSEMBLY

Magnet gap diameter, 1 in.
Flux density, 13,200 gauss.
Total Flux, 44,000 maxwells.
Foam surround. Aluminium voice coil and centre dome.



PRICE £25 TAX FREE

COLUMN 8/145

Bass Resonance, 45/55 c/s.
Flux Density, 14,500 gauss.
Total Flux, 60,000 maxwells.
Price (inc. P.T.) £6/19/11



W15/FS

Bass Resonance, 25/30 c/s.
Flux Density, 13,500 gauss.
Total Flux, 180,000 maxwells.
Price ... £17/10/-



SUPER 12/FS/AL

Bass Resonance 30/38 c/s.
Flux Density, 17,000 gauss.
Total Flux, 190,000 maxwells.
Price £17/10/-



SUPER 3

Flux Density, 14,500 gauss.
Total Flux, 60,000 maxwells.
Price (inc. P.T.) £6/13/3

Wharfedale

WIRELESS WORKS LTD
IDLE BRADFORD YORKS

FOAM SUSPENSION reduces the incidence of distortion at low frequencies, and the softness improves dissipation of middle and high frequency vibrations at the edge of the cone, resulting in all-round improvement in the smoothness of response.

Illustrated, descriptive leaflet and cabinet construction sheet free on request.

Telegrams: 'Wharfdel' Idle, Bradford
Telephone: Idle 1235/6

Stabilized POWER PACKS



PP1 FOR
THERMIONIC
VALVES

£150 NETT IN U.K.

Leaflet W60


- ▶ High-power 0-600 volts stabilized 300 mA max.
- ▶ L.T. supplies stabilized — two independent outputs at 6.3 volts 4 amps.
- ▶ H.T. source resistance less than 0.1 ohm at d.c. and less than 0.5 ohm up to 30 kc/s.
- ▶ H.T. source resistance may be varied up to a maximum of 40 ohms.
- ▶ Mains ripple of up to 6 volts can be superimposed on H.T. line.
- ▶ Overload protection of H.T. line by resettable cut-out.

Advance COMPONENTS LIMITED

INSTRUMENTS DIVISION

ROEBUCK ROAD • HAINAULT • ILFORD • ESSEX • TELEPHONE : HAINAULT 4444

by

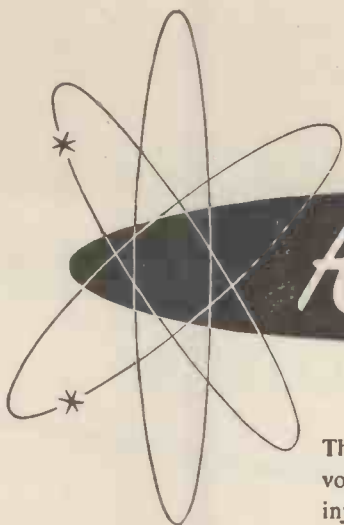

Advance

Two new stabilized power packs with outstanding features for the development engineer.

The Type PP.1 has the unique features of stabilized L.T. voltages, variable H.T. source resistance, and mains ripple injection on the H.T. line.

The Type PP.3 is fully transistorized and provides simultaneous d.c. voltages of either polarity, and is fully protected against accidental short-circuit.



PP3 FOR TRANSISTORS

£110 NETT IN U.K.

Leaflet W62

- ▶ Two independent variable d.c. supplies 0-30 volts 1 amp.
- ▶ Positive and negative supplies provided simultaneously.
- ▶ Up to 60 volts d.c. by series connection.
- ▶ Fully protected against short-circuits.
- ▶ Ripple less than 1 mV peak-to-peak.
- ▶ Both voltage and current monitored simultaneously.

We shall be pleased to arrange for our Area Sales Engineer to demonstrate these models to you.

AEI SILICON VOLTAGE-REFERENCE DIODES

- **Low slope resistance**
typical value less than 2 ohms
- **Tight control of slope resistance spread**
to within ± 3 ohms of typical
- **Close tolerance Temperature Coefficient Curves**
- **Comprehensive Voltage Range**
- **Excellent High Temperature Performance**
upper limit in excess of 200°C
- **High Stability**
- **Fully Tropical Construction**

TYPE	VR35-B	VR425-B	VR475-B	VR525A-B	VR525B-B	VR575A-B
Voltage Range	2.9-4.1	3.9-4.6	4.4-5.1	4.9-5.6	4.9-5.6	5.4-6.1
Slope Resistance at 25°C Max. Limit	20 ohms	19 ohms	18 ohms	17 ohms	12 ohms	10 ohms
Slope Resistance at 25°C Min. Limit	15 ohms	14 ohms	12 ohms	12 ohms	6 ohms	5 ohms
TYPE	VR575B-B	VR625-B	VR7-B	VR8-B	VR9-B	VR10-B
Voltage Range	5.4-6.1	5.9-6.6	6.4-7.6	7.4-8.6	8.4-9.6	9.4-10.6
Slope Resistance at 25°C Max. Limit	5 ohms	4 ohms	4 ohms	4 ohms	4 ohms	5 ohms
Slope Resistance at 25°C Min. Limit	0	0	0	0	0	0

ASSOCIATED ELECTRICAL INDUSTRIES LIMITED
ELECTRONIC APPARATUS DIVISION

LINCOLN, ENGLAND

ALTOBASS

set the seal on
Stereo design

Rarely is it possible to combine imaginative design and Functional perfection, particularly so when no compromise in performance is permissible. Such qualities however are both found in the Altobass Stereo Seventy Pre-Amplifier for which the Council of Industrial Design have awarded Altobass a Design Seal.



A most comprehensive pre-amplifier and control system equipped with all the necessary controls for stereophonic or monaural reproduction. Suitable for use with any type of stereo pickup. A unique feature of the design is that the frequency response and volume level for each channel can be adjusted independently. This enables different loudspeakers to be matched perfectly.

STEREO SEVENTY PRE-AMPLIFIER AND CONTROL UNIT

23 gns



TWIN-TWO AMPLIFIER


A simple, inexpensive system for stereophonic reproduction of extremely good quality. It consists of a control unit and the main amplifier unit, connected by cables five feet long. Its remarkably low price represents the finest value in stereo amplifiers.

16 gns complete

TWIN-TWELVE AMPLIFIER

A stereo amplifier unit, incorporating two 12 watt power amplifiers on a common chassis. For use with the Stereo Seventy Pre-Amplifier.

29 gns

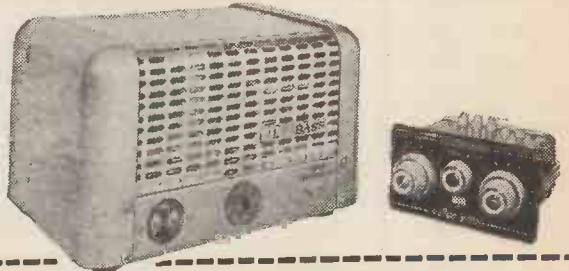

STEREO 44

A build-it-yourself stereophonic amplifier kit with simple step-by-step instructions. The kit is absolutely complete with all parts, nuts and bolts, connecting wire—even a spanner!

18 gns

Write for leaflet giving full technical specifications.



ALTOBASS LIMITED

PERCY ROAD, LEICESTER



READ DIRECTLY
1 μ ma
 and
1 μ v

10 times previous accuracy, drift less than
 $\pm 2\mu\text{v}$, noise less than $0.2\mu\text{v}$!
 New 425A microvolt-Ammeter

£205
 delivered U.K.

Now make these difficult measurements quickly, easily

Engineering—minute dc potentials, difference voltages, nulls; resistances from milliohms to 10 megmegohms (with external dc source). Also use with Esterline-Angus, other recorders

Physics, Chemistry—grid, photomultiplier circuits, vacuum ion levels, thermocouple potentials, voltaic currents in chemicals

Medicine, Biology—voltages in living cells, plants, seeds, nerve voltages

Use of a photoelectric chopper instead of a mechanical vibrator, insuring low noise and drift. Protection against 1,000 volt momentary overloads. New probe minimizing thermocouple and triboelectric effects. Heavy ac filtering.

Above are but a few of the reasons why the new *hp*-425A does the work of complex equipment arrays faster, more simply and with 10 times previous accuracy.

In addition to extremely small voltages and currents, Model 425A measures resistances from milliohms to 10 megmegohms, in conjunction with an external constant current.

SPECIFICATIONS

MICROVOLT-AMPLIFIER:

Voltages: Pos. and neg. $10\mu\text{v}$ to 1 v full scale. 11 ranges, 1-3-10 sequence.

Current: Pos. and neg. $10\mu\text{ma}$ to 3 ma full scale. 18 ranges, 1-3-10 sequence.

Input Impedance: 1 megohm on voltage ranges, 1 megohm to 0.33 ohms on current ranges.

Accuracy: $\pm 3\%$ full scale.

AMPLIFIER:

Frequency Range: dc to 0.2 cps.

Gain: 100,000 maximum.

Output: 0 to 1 v, adjustable.

Output Impedance: 10 ohms, 1,000 ohm shunt.

Data subject to change without notice



HEWLETT-PACKARD CO.

Represented by



Get complete details today from:-

LIVINGSTON LABORATORIES LIMITED

RET CAR STREET • LONDON • N.19

Telephone: ARChway 6251

A NEW ALL-BRITISH



TRANSISTOR!

This new Sylvania-Thorn NPN Germanium Alloy Transistor Series GT 422 has been designed and made in Britain for power switching applications. It is precision built of hermetically-welded construction in a rigidly-controlled production environment; its reliability and long life is ensured by careful inspection and testing at all stages of manufacture.

MAXIMUM JUNCTION TEMPERATURE: 85°C

MAXIMUM COLLECTOR CURRENTS UP TO: 6 AMPS.

MAXIMUM COLLECTOR-EMITTER VOLTAGES UP TO: 60 V


Several ratings are available. Write for further details to:

Sylvania-Thorn Colour Television Laboratories Limited, Dept. GT3
Great Cambridge Road, Enfield, Middx

SYLVANIA-THORN



MAXIMUM RATINGS					
	GT 423	GT 422	GT 424	GT 425	GT 426
MAXIMUM COLLECTOR-EMITTER VOLTAGE <i>(Transistor conducting)</i>	60V	60V	60V	36V	36V
MAXIMUM COLLECTOR CURRENT ¹	6A	6A	3A	6A	3A
DC CURRENT GAIN AT RATED COLLECTOR-CURRENT					
MAXIMUM:	120	35	60	35	60
MINIMUM:	35	11	18	11	18

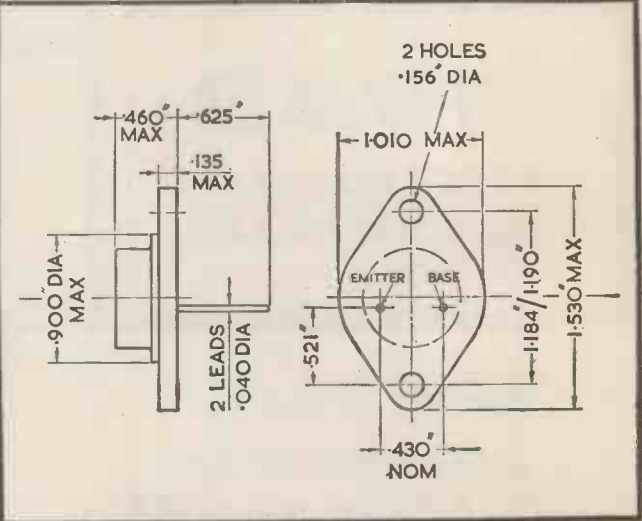

NPN GERMANIUM ALLOY TRANSISTOR SERIES GT 422

*A higher standard of
listening enjoyment and
satisfaction in the home*



QUAD

**ELECTROSTATIC
LOUDSPEAKER**

*'For the closest
approach to the
original sound'*


The Quad Electrostatic Loudspeaker is essentially an instrument designed for the home* of the music-lover with every emphasis towards the natural quality desirable for serious listening to music of all types. Of modest size, this loudspeaker is suitable for use in the average-sized lounge; it is capable of providing distortionless reproduction under such conditions up to a volume level similar to that experienced in the concert hall.

**Increasingly used in studios, monitor rooms and wherever standards have to be set—and maintained.*

Send a postcard marked for illustrated booklet.

Chapman

THE COMPLETE ANSWER

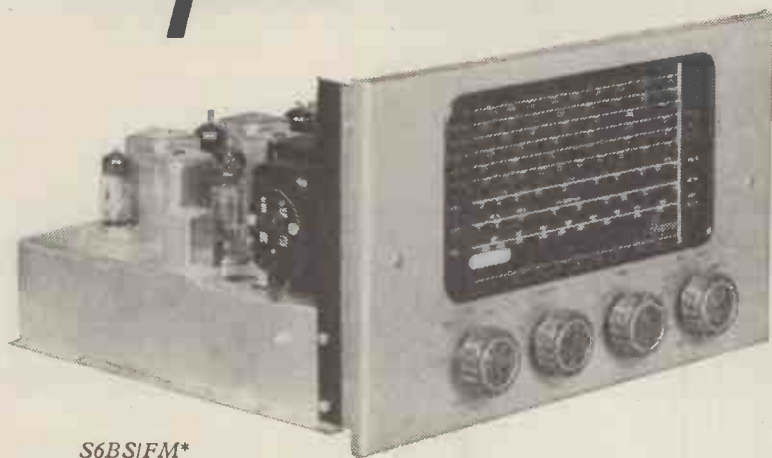

S6BS/FM*
PRICE £67|10|0 inc. P.T.

The S6BS/FM is a worthy addition to our fine range of High Fidelity Equipment



S5/FM AM/FM TUNER
PRICE £34 inc. P.T.

- *AM & FM 2 micro-volts
- 9 Band AM 11-570m
- 6 Band Spread Ranges
11-31m
- FM 88-108 mcs.
- 12-Valve Self-Powered
Tuner
- Stereo Multiplex Output
- Fully Tropicalised



FM 95 AM/FM TUNER
PRICE £27|2|6 inc. P.T.



105 10W AMP. & CU.
PRICE £29|18|0



FM91 VHF/FM TUNER
PRICE £23|8|0 inc. P.T.

Standard S6BS AM only still available



205 30W AMP.
PRICE £34



305 Stereo Control Unit
PRICE £18|18|0



STEREO 10W+10W.
PRICE £21

Manufactured and Guaranteed by :

Catalogue giving full technical details of the above models available free on request

C. T. CHAPMAN (Reproducers) LTD.
HIGH WYCOMBE BUCKINGHAMSHIRE

Telephone : HIGH WYCOMBE 2474

W197 – a unique, vibration and acceleration resistant capacitor

Capacitance µF ± 25%	List Number	Joint Service Cat. No.	Style Patt. Size Ref.
200 volts D.C. Working			
0.1	B5000KZ	5910-99-011-9827	CPM4-G
0.25	B5010KZ	5910-99-011-9830	CPM4-H
0.5	B5020KZ	5910-99-011-9833	CPM4-J
1	B5030KZ	5910-99-011-9836	CPM4-K
2	B5040KZ	5910-99-011-9839	CPM4-N
250 volts D.C. Working			
0.05	B5050KZ	5910-99-011-9825	CPM4-G
0.1	B5060KZ	5910-99-011-9828	CPM4-H
0.25	B5070KZ	5910-99-011-9831	CPM4-J
0.5	B5080KZ	5910-99-011-9834	CPM4-K
1	B5090KZ	5910-99-011-9837	CPM4-L
2	B5100KZ	5910-99-011-9840	CPM4-P
400 volts D.C. Working			
0.05	B5110KZ	5910-99-011-9826	CPM4-H
0.1	B5120KZ	5910-99-011-9829	CPM4-J
0.25	B5130KZ	5910-99-011-9832	CPM4-K
0.5	B5140KZ	5910-99-011-9835	CPM4-M
1	B5150KZ	5910-99-011-9838	CPM4-P



It's the W197 capacitor, by Hunts — the *only* High Capacitance Miniature Metallised Paper Capacitor with *Joint Services approval* to Humidity Class **H1** and Temperature Category 55/100.


The special construction of Type W197 produces a solid mass, strongly resistant to vibration and conditions of high acceleration. Together with Type W97, already well proven, it provides a capacitance range from 50pf to 2µF.

Full details freely available on request.

A. H. HUNT (Capacitors) LTD.
Factories also in Essex, Surrey and North Wales



WANDSWORTH · LONDON · S.W.18
Tel: **VANdyke 6454**

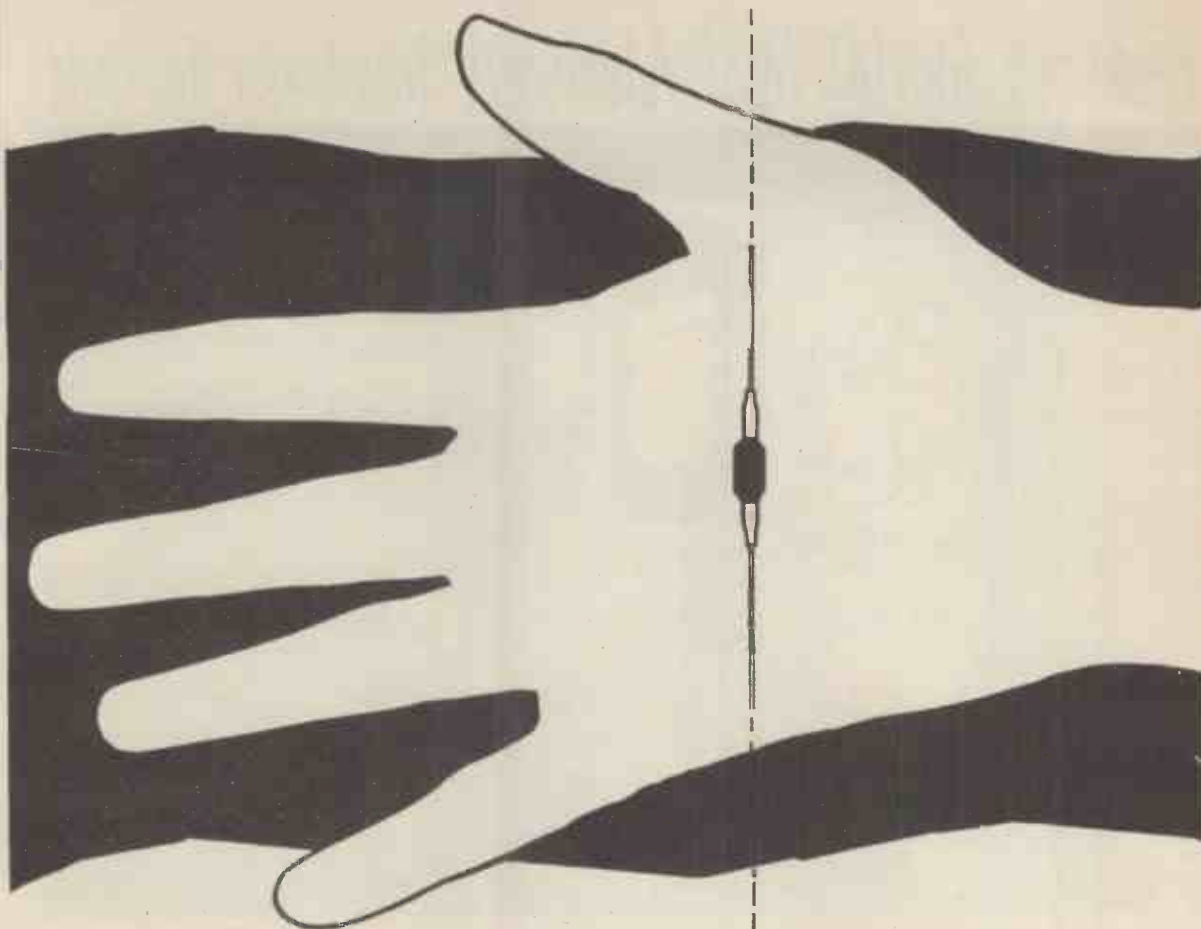

SenTerCel 1 WATT SILICON ZENER DIODES

- Have a large dissipation for their size
- Are suitable for use as regulators, limiters, surge suppressors, and voltage references
- Are suitable for high temperature operation
- Have a low temperature co-efficient of voltage
- The first complete range of close-tolerance ZENER Diodes available from production

Characteristics and ratings of SenTerCel Zener Diodes are given in publication MF/103

Z2 SERIES ZENER DIODES		
±5% Voltage Tolerance (Red and Green Sleeves)	TYPE	NOMINAL VOLTAGE
±10% Voltage Tolerance (Red and Yellow Sleeves)	Z2A33F	3.3
	Z2A36F	3.6
	Z2A39F	3.9
	Z2A43F	4.3
	Z2A47F	4.7
±20% Voltage Tolerance (Red and Blue Sleeves)	Z2A51F	5.1
	Z2A56F	5.6
	Z2A62F	6.2
	Z2A68F	6.8
	Z2A75F	7.5
	Z2A82F	8.2
	Z2A91F	9.1
	Z2A100F	10
	Z2A110F	11
	Z2A120F	12
	Z2A130F	13
	Z2A150F	15




Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

RECTIFIER DIVISION: EDINBURGH WAY HARLOW ESSEX

From the World's Most Advanced Transistor Factory

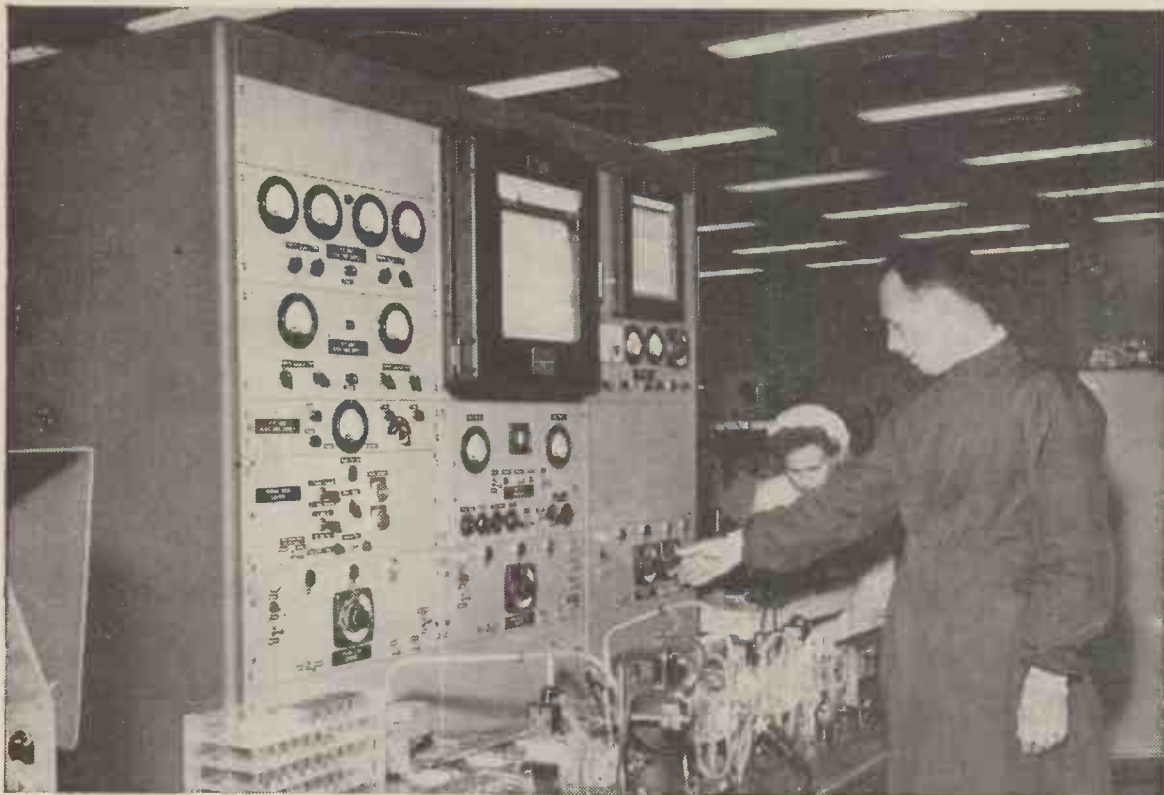

IMMEDIATE DELIVERIES OF SURFACE BARRIER TRANSISTORS—

in any quantity up to 5,000

The Semiconductors Limited Swindon factory—the most advanced transistor factory in the world—has been operating planned automatic production for nearly a year. Many times faster than conventional production methods, this achievement eliminates delivery problems for Surface Barrier transistors!


Equipment designers on high-frequency/high-speed switching applications can go ahead confidently with development and can plan production knowing that from now on they may expect—as a matter of course—immediate delivery of all types, in any quantity up to 5,000 off. Planned automatic production by Semiconductors Limited means more and cheaper transistors—now.



For immediate assistance on your transistor queries telephone Semiconductors' Applications Laboratory—SWINDON 6421/4

Semiconductors Limited

CHENEY MANOR · SWINDON · WILTS · TEL: SWINDON 6421

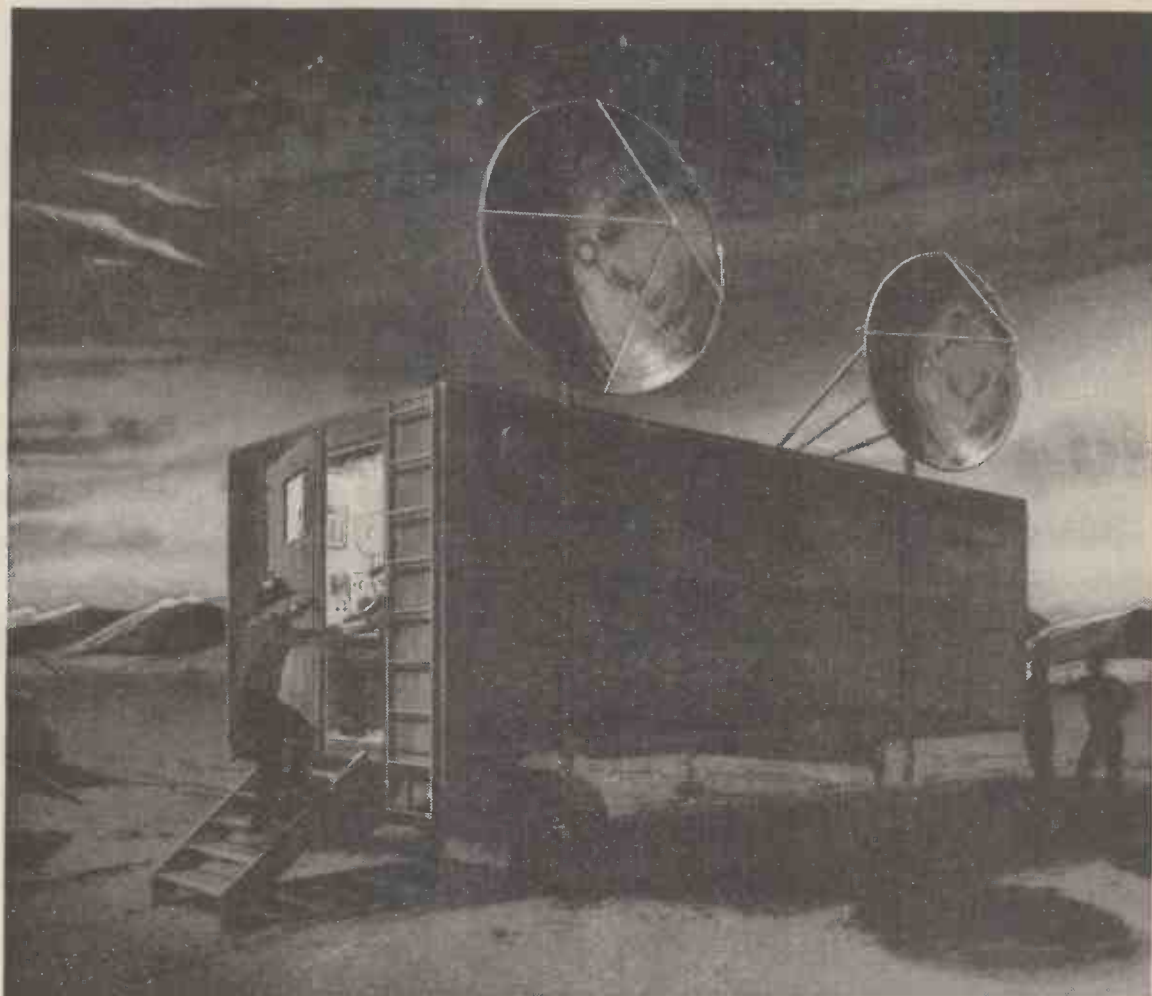

NEW TROPO SCATTER SYSTEMS

can be set up anywhere in 8 hours or less!

A new, transportable communication system has been developed by Canadian Westinghouse for sending two-way voice or teletype messages up to 200 miles *without* relay stations.

Its name is MICROSCATTER—the most compact system ever developed for low-cost, long range tropospheric scatter communications.

Now in production for customer orders, MICROSCATTER radio is a super high frequency system that can go *anywhere*. MICROSCATTER transmitters and receivers for quadruple diversity, including antennas, can be mounted in a standard 30 ft. truck trailer. Units designed for self-contained field shelters can be set down by helicopter in remote locations—and a MICROSCATTER installation can be set up ready for operation within 8 hours!

MICROSCATTER APPLICATIONS

COMMERCIAL		MILITARY	
Fixed Station	—120 telephone channels —television and sound	Wide Band	—radar —data —120 telephone channels
Transportable	—48 telephone channels —teletype	Tactical and Transportable	—48 voice channels —teletype —data

FEATURES

- Frequency—4400-5000 mc
- Antennas—10 to 28 ft. diameter
- Power—2 KW
- Range—100 to 200 miles

A Westinghouse communications specialist will gladly furnish complete information on MICROSCATTER radio. Phone your nearest Westinghouse office, or write to Canadian Westinghouse Company Limited, Electronics Division, Hamilton, Canada.

YOU CAN BE SURE...IF IT'S **Westinghouse**

well connected with ...

Superspeed

Superspeed Cored Solder, incorporating Enthoven's unique 6-channel stellate core, is unchallenged as the most efficient cored solder wire for general assembly work on radio, television, electronic and telecommunication equipment. It speeds production, reduces costs and makes a vital contribution to the dependability of your products.

Not only Superspeed. The knowledge that you rely on Enthoven for *all* your solder requirements cannot fail to enhance your prestige and increase confidence in your products. It is a name that represents 150 years experience in non-ferrous metals and an incomparable record in research and development.

SUPERSPEED CORED SOLDER
for normal electrical assembly work


SUPERSPEED 'XX' CORED SOLDER
specially developed to solder tarnished, plated, and/or oxidised surfaces easily

ENTHOVEN
SOLDER PRODUCTS

ENTHOVEN SOLDERS LIMITED


Sales Office & Works: Upper Ordnance Wharf, Rotherhithe Street, London, S.E.16. Telephone: BERmondsey 2014

Head Office: Dominion Buildings, South Place, London, E.C.2. Telephone: MONarch 0391

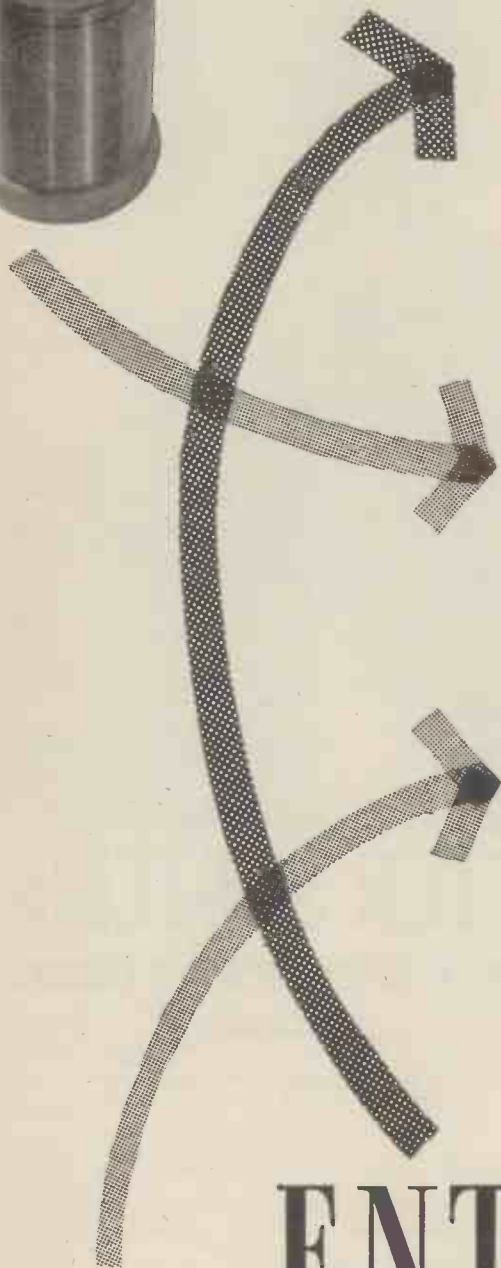

**A VALVE VOLTMETER
FROM**

Advance

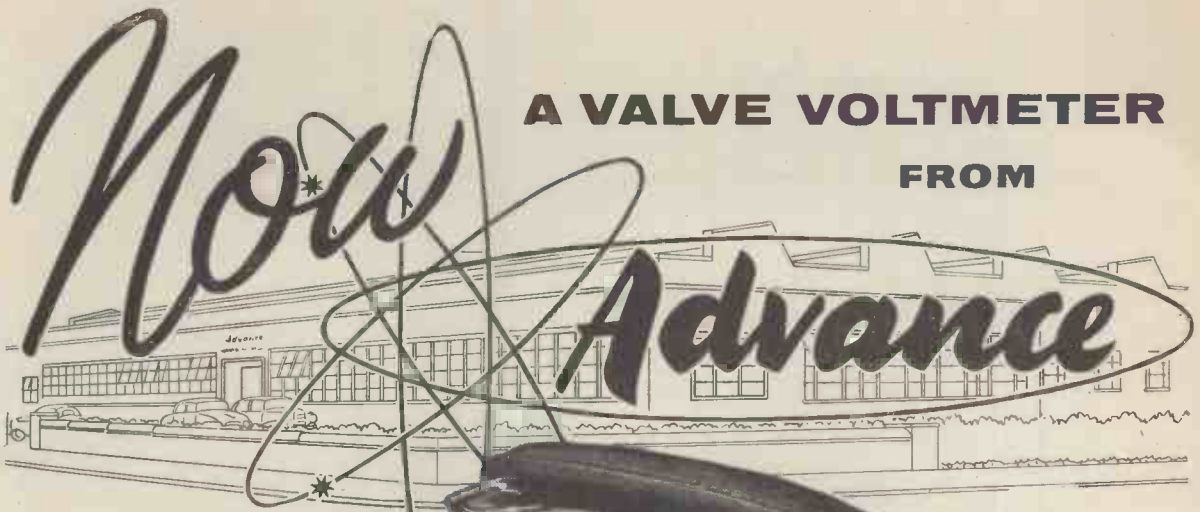

With these

OUTSTANDING FEATURES

EXTREME SENSITIVITY

accurate measurements are possible down to 100µV.

WIDE VOLTAGE RANGES

1mV. to 300 volts F.S.D.

WIDE FREQUENCY RANGE

15c/s to 4.5Mc/s

**METER SCALE CALIBRATED
IN VOLTS AND dB**

**CAN BE USED AS A NULL
DETECTOR AND INDICATOR**
from 10c/s to 10Mc/s

**CAN BE USED AS AN
AMPLIFIER FROM 10 c/s to 10Mc/s**

**INCORPORATES ITS OWN
H.T. STABILIZER**

**SMALL COMPACT SIZE
& ROBUST CONSTRUCTION**

at this price . . .

£50 nett in U.K.

(including very low capacity screened lead and probe)

with this backing . . .

Behind this, the most modern instrument in its sphere, is that specialist instrumentation skill and experience which has earned for all "Advance" products a reputation second to none throughout the industry. From our up-to-the-minute factory at Hainault comes this latest addition to the world-famous "Advance" range of instruments.

Full Technical details in Leaflet W50

Size 4¾" x 7½" x 6¾".
Weight 7lb.

THE **Advac**

Advance COMPONENTS LIMITED
INSTRUMENTS DIVISION

ROEBUCK ROAD • HAINAULT • ILFORD • ESSEX TELEPHONE: HAINAULT 4444

RCA **DRIFT** TRANSISTORS

5 - TRANSISTOR
CAR RADIO
RECEIVERS!

make possible

"DRIFT"
2N640
RF
AMP.

"DRIFT"
2N642
CONV

"DRIFT"
2N641
IF
AMP.

2N591
DRIVER-
AMP.

2N301
POWER
AMP.

RCA "Drift" transistors are designed and controlled specifically for operation in car radio receivers for the frequency range 535 Kc to 1640 Kc.

RCA "Drift" transistors feature low feedback capacitance, controlled power gain characteristics to ensure unit-to-unit interchangeability and excellent stability. In addition, close manufacturing controls of the small-signal parameters make them especially desirable for use in quantity-produced car radios.

Not only do RCA "Drift" transistors make all-transistor car radios immediately possible but economically practicable. Manufacturing costs compare favourably with those of conventional hybrid receiver designs.



Illustrated is an experimental all-transistor car radio using 5 transistors. The three RCA "Drift" units described here together with an RCA/2N591 driver amplifier and an RCA/2N301 class A power amplifier produce 1 watt audio output for a 2-microvolt RF-signal input. Maximum power output 4 watts with under 10% distortion.

RCA TYPE	Typical CURRENT GAIN Measured at 1 Kc (Beta)		Useful POWER GAIN DC Collector-to-Emitter Volts = -12			Maximum DC Collector Cutoff Current (I _{CSO})	
	DC Collector Ma	Current Gain	Signal Frequency Kc	DC Collector Ma	Power Gain db	DC Col- lector-to- Base Volts	I _{CSO} Ma
2N640	-1	60	1500	-1	28	-12	-5
2N641	-1	60	262.5	-1	41	-12	-7
2N642	-1	60	1000	-0.6	40●	-12	-7
2N591	-2	70	1	-2	41	-1	-7
2N301	-1000	70▲	0.4	-1800■	33	-0.5	-100

● Conversion Power Gain. ■ Peak value. Zero-Signal DC Collector Ma = -900. ▲ DC Current Gain.

For technical data write to :

RCA GREAT BRITAIN LIMITED, Engineering Products Sales Department, W.W.I.
Lincoln Way, Sunbury on Thames, Middlesex. Tel: Sunbury on Thames 3101.



FIRST STAGE RECONDITIONING OF C.R.T.s


For the reconditioning of C.R.T.s we supply the complete outfit as an additional service to our customers. This Equipment can only be purchased with our Pumping Units and is not available for sale on its own.

Additional items obtainable: Heater Box for Gun Assembly; Assembly Jigs. All spares for Pumping and Auxiliary Equipment.

Our Engineers are available to help you, to lay out and to install the required machinery, and our Technical Dept. will assist you in any problems you might encounter in this field.

SECOND STAGE of reconditioning C.R.T.s (washing, settling, aquadag coating, drying, baking and Aluminising plant) is also obtainable from us.


We design, manufacture and supply Vacuum Machinery to Major Companies in Great Britain and Overseas.

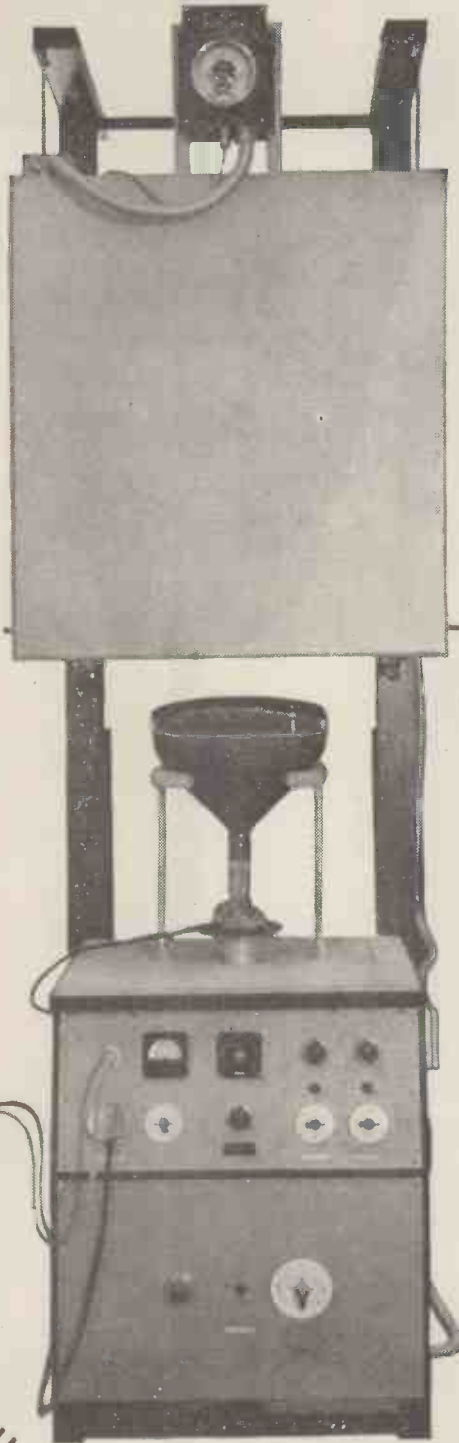


Single Position Pumping Unit complete with Automatic press-button electric seal-off and pre-selected cathode forming




SPOT WELDER with Automatic Timer and Resistance

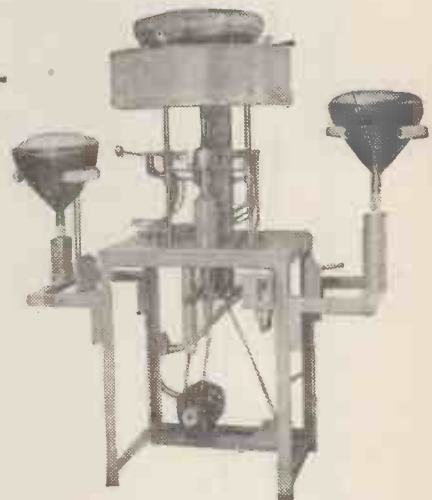

GLASS SEAL MACHINE for neck sealing, drop sealing and stretch sealing

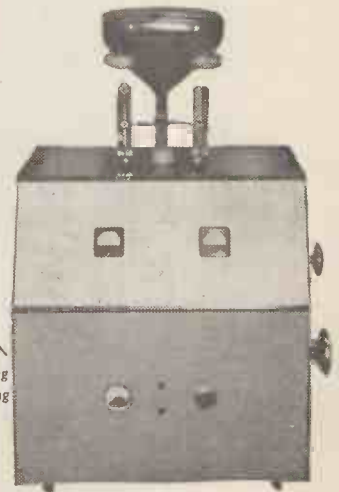

H.F. INDUCTION UNIT for De-gassing and Getter Firing




U.V. CABINET For Screen Inspection.



VACWELL ENGINEERING CO. LTD

WILLOW LANE · MITCHAM · SURREY Phone: MITcham 8211 (3 lines)

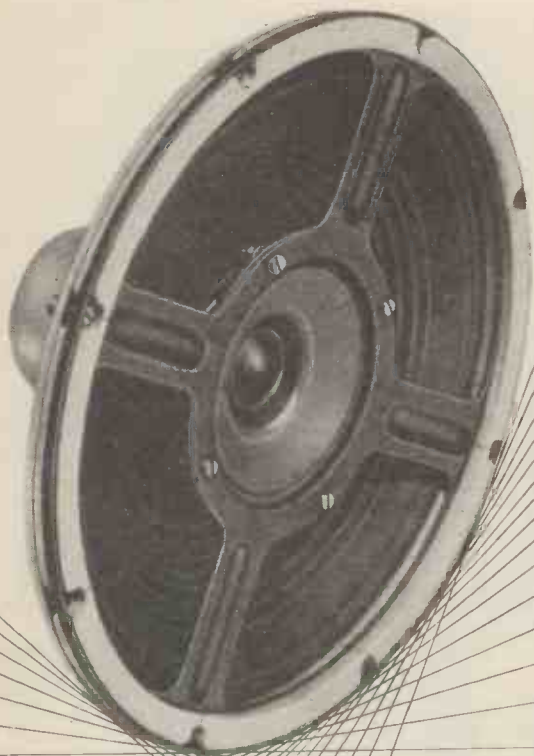


LOUD-SPEAKER MANUFACTURERS
FOR THE RADIO INDUSTRY SINCE 1930

REPRODUCERS AND AMPLIFIERS LTD.
WOLVERHAMPTON · ENGLAND

TELEPHONE : 22241/2/3/4 CABLES : AUDIO


Only EIMAC gives you ceramic "extras" in more than 40 tube types

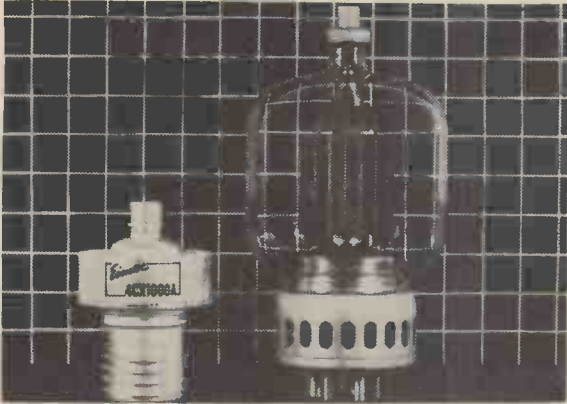


SMALLER SIZE



IMPACT SURVIVAL

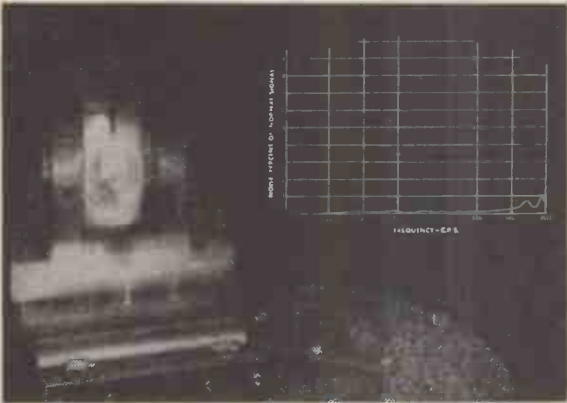

VIBRATION SURVIVAL

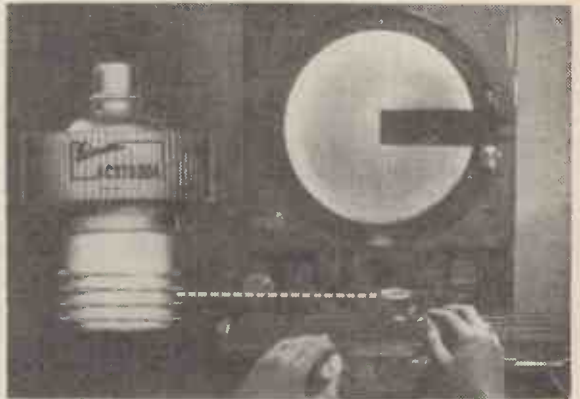

EXACT DIMENSIONAL UNIFORMITY



EXTREME HEAT SURVIVAL



LOWER DIELECTRIC LOSS

Write for literature on these incomparable ceramic reflex and amplifier klystrons, negative grid and travelling wave tubes.

EITEL-McCULLOUGH, INC.
SAN CARLOS, CALIFORNIA.

Eimac First with ceramic tubes that can take it



Cable address
EIMAC
San Carlos

Living Together

Pluggable Components

THE MOST RECENT, the most outstanding, and the most revolutionary example which has emerged from the Erie principle of living together, and one which will be welcomed by all associated with the problems of adapting traditional components for printed circuits, is a component specially developed and specially tailored for the job.

The Erie pluggable component is fitted with special strip terminations, shouldered and tapered for easy insertion and positive location, thus avoiding looping, crimping, bending, cropping, and elaborate and expensive insertion machinery, as is necessary with the traditional wire ended component.

The design of the termination eliminates the possibility of the component falling out or loosening prior to the soldering operation, the finish of the termination ensures consistently good connection with the minimum amount of solder, and the shoulder on the termination raises the component to a standard and safe distance from the board. Furthermore, the design of the termination ensures that inductance and stray capacitance are low and constant, and, above all, facilitates replacement in servicing.


Engineers and designers interested in saving costs on printed circuit applications are invited to write for details and samples.



Style AP
Ceramicon★



Style BP
Ceramicon★



Type 8AP
Resistor



Style 8IIP
Ceramicon★

Designs Registered
Patents Pending

1, HEDDON STREET, LONDON, W.1
Telephone: REGent 6432

FACTORIES

Great Yarmouth and Tunbridge Wells, England; Trenton,
Ont., Canada; Erie, Pa., Holly Springs, Miss., and
Hawthorne, Cal., U.S.A.

★
ERIE
RESISTOR
LIMITED

★Registered Trade Marks

K345 Series of Reflex Klystrons

5925 to 8025 Mc/s



The K345 series has been developed by the **English Electric Valve Co. Ltd.** to provide reliable reflex Klystron oscillators for transmitter service over the frequency range from 5925 to 8025 Mc/s. These valves are suitable for microwave links and many other applications.

The seven valves of the series cover the frequency range in steps of 300 Mc/s, the power level being one watt. They are designed to be equivalents of the VA220 tubes both in performance and overall dimensions and are interchangeable with them. Good linearity of the frequency versus reflector voltage characteristic ensures low F.M. distortion. A special feature of the K345 is its external cavity which improves the frequency stability. The simple screw tuner in the coupled cavity provides a conveniently slow tuning rate and, being external to the vacuum envelope, ensures longer operating life. For further details and for the complete range of Klystrons manufactured, please write to the **English Electric Valve Co. Ltd.**

Typical Operation (at 7370 Mc/s)


Resonator voltage	750 V
Resonator current	72 mA
Reflector voltage	- 350 V
Output power	1.0 W
Electronic tuning between 3 dB points	30 Mc/s
Modulation sensitivity	250 kc/s/V
Mechanical tuning rate	100 Mc/s/turn

'ENGLISH ELECTRIC'

ENGLISH ELECTRIC VALVE CO. LTD.



Chelmsford, England
Telephone: Chelmsford 3491

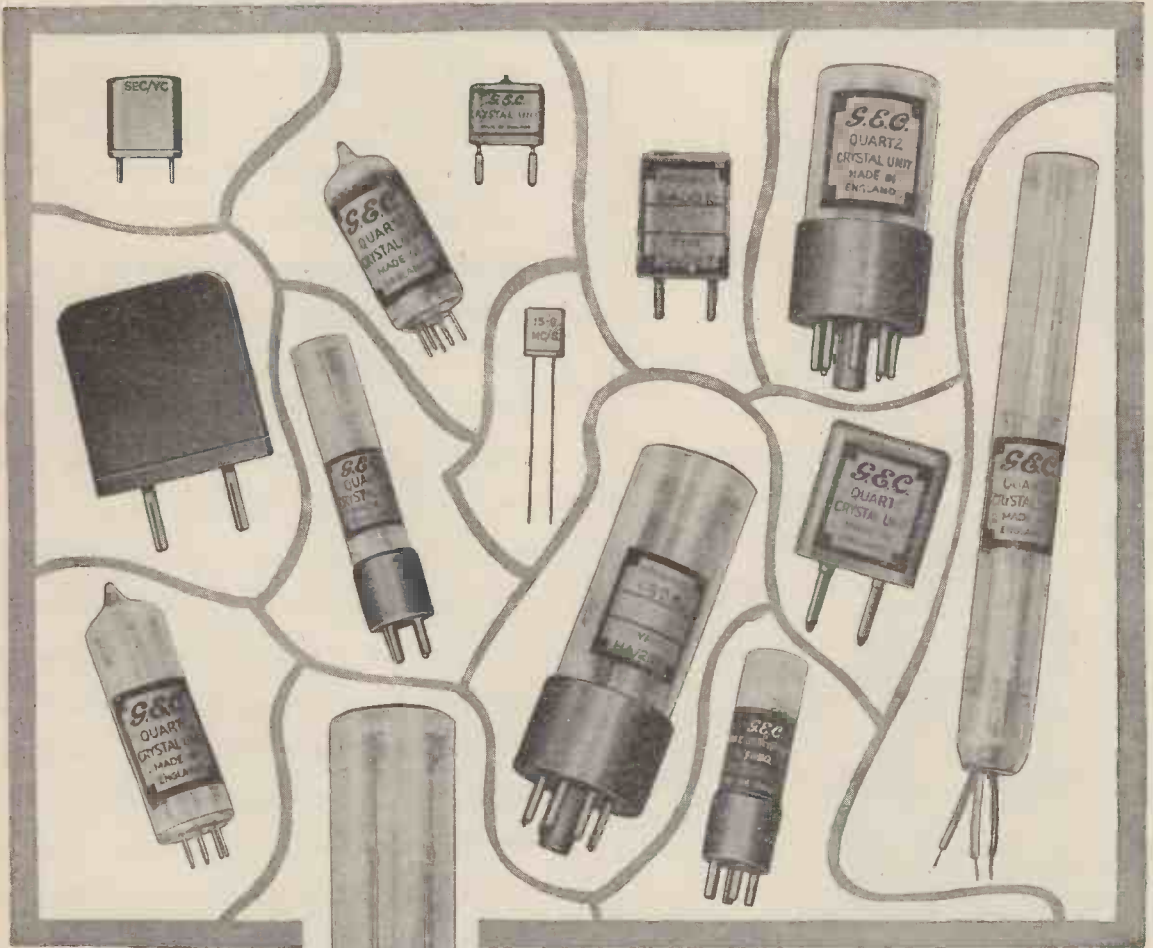

From
200 cycles/sec.
to
90 Mc/sec.



No pieces missing

For long term stability and unfailing activity, G.E.C. Quartz Crystal Units provide the basis for reliable communications systems.

A complete range of units to meet D.E.F. 5271 and

R.C.L. 271 Inter-Service styles can be supplied.

QUARTZ CRYSTALS

SALFORD ELECTRICAL INSTRUMENTS LTD. Times Mill, Heywood, Lancashire. Tel.: Heywood 6868

London Sales Office: Tel.: TEMple Bar 4668. A Subsidiary of the General Electric Co. Ltd. of England

Hermetic Sealing

**STEATITE & PORCELAIN
NICKEL METALLISING**

Quality Approved (Joint Service R.C.S.C.)


WILL MEET THE MOST EXACTING REQUIREMENTS



**METALLISED
BUSHES**

Perfect Terminations

—made readily without special precautions by semi-skilled labour, employing simple hand soldering methods, R.F. Heating, Hot Plate, Tunnel Oven or similar mass production methods.

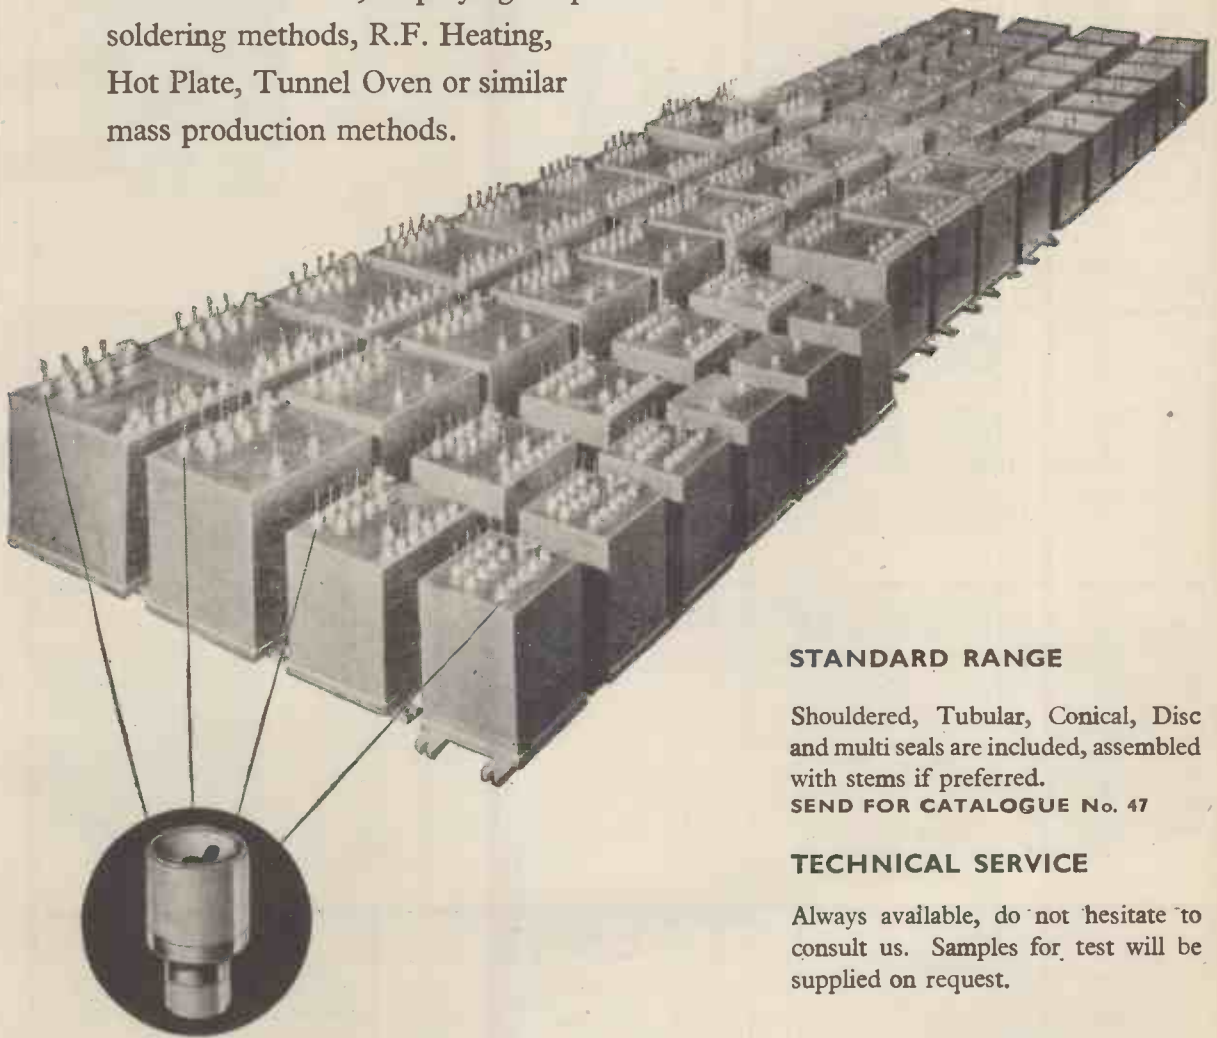

STANDARD RANGE

Shouldered, Tubular, Conical, Disc and multi seals are included, assembled with stems if preferred.

SEND FOR CATALOGUE No. 47

TECHNICAL SERVICE

Always available, do not hesitate to consult us. Samples for test will be supplied on request.

STEATITE & PORCELAIN PRODUCTS LTD.

STOURPORT ON SEVERN, WORCS.

Telephone: Stourport 2271


Telegrams: Steatoin, Stourport

TRANSFORMERS


All for 240 V Input, other Supply Voltages as Required
CONTINUOUS RATING, Short Rating Transformers also available

Each Transformer in this group £8 10 0


OUTPUTS:




- 5 V 80 Amps
- 12 V 40 Amps
- 24 V 30 Amps
- 30 V 25 Amps
- 18 V 30 Amps
- 110-120 V 4 Amps
- 4 V 100 Amps
- 60 V Centre Tapped 30 V 7 Amps
- 17.5 V 40 Amps
- 55 V 15 Amps



- 4 V 5,000 Amps£100
- 2 V 10,000 Amps £98
- 3.5 V 20,000 Amps£127
- 2 V 30,000 Amps£130
- 10 V 2,000 Amps£103



- 10 V 1,000 Amps £59
- 10 V 500 Amps £38
- 10 V 750 Amps £48
- 10 V 300 Amps £28
- 10 V 900 Amps £50
- 12 V 1,000 Amps £64
- 15 V 1,000 Amps £75
- 20 V 800 Amps £80
- 5 V 1,000 Amps £39



- 5 V 140 Amps £10
- 110-120 V 10 Amps £15
- 40 V 25 Amps £15
- 5 V 300 Amps £20
- 6-12 V 50 Amps £10
- 12 V 60 Amps £10
- 12 V 100 Amps £16
- 50 V 60 Amps £25

- 110 V Centre Tapped 55 V 25 Amps £26
- 10-15-25 V 100 Amps £26
- 6-8-10-18-24 V 100 Amps £32
- 6-12-18-24-30 V 12 Amps £11
- 1.6 V to 49 V in 23 Combinations 12 Amps £13




AUTO TRANSFORMERS

- 230-115 V 5 Amps £8
- 250-240-230-220-120-115-110-105 V 12 Amps £13
- 250-240-230-220-120-115-110-105 V 60 Amps £50

THREE PHASE TRANSFORMERS


- Input 400/440 V
- 40 V 60 Amps 3 Phase £30
- 230 V 50 Amps 3 Phase £78
- 110 V 100 Amps 3 Phase £90
- 4 V 5,000 Amps 3 Phase£130



These and other Transformers can be supplied for 3 phase, 6 phase and 12 phase Rectifiers.

CONSOLES

AC and DC Supply Units with infinitely variable or tapped output. Manual or Remote Control with full instrumentation. The Console illustrated has a stabilized 230 V AC supply as well as several low voltage heavy current sources. Each source is independent of the others, but where called for, interlocking and protection devices can be included.

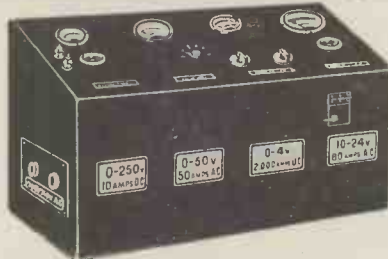

RECTIFIER SETS

All for 200/250 VAC (Other supply Voltages available)



- Rectifier Sets. DC Volts ON LOAD are stated.
- 6.3 V DC 13 Amps with £24
 - 220 V DC 110 mAmps £87
 - 12 V DC 200 Amps £26
 - 24 V DC 20 Amps £30
 - 34 V DC 10 Amps £31
 - 36 V DC 50 Amps £34
 - 110/120 V DC 10 Amps £34
 - 110/120 V DC 25 Amps £35
 - 200/250 V DC 6 Amps £39
 - 200/250 V DC 10 Amps £44
 - 200/250 V DC 18 Amps £60
 - 1,200 V DC 200 mAmps £40
 - Fitted Ammeters and Voltmeters, per meter £4
 - Built in Rheostats £4

Rectifier Sets with control of DC Output by Variable Choke. Fitted with Ammeter.

DC Volts ON LOAD are stated

- 12/25 V DC 12 Amps ... £18
- 15 V DC 5 Amps ... £12



VOLTMOBILE VOLTAGE REGULATING TRANSFORMERS

Covering the range from zero volts to supply volts in 64 steps. This is achieved by switching ON LOAD.



- INPUT 240 V
OUTPUT 0/250 V
Change per step 3.8 V (1.6%)
- 30 Amps £32
 - 40 Amps £55
 - 60 Amps £62
 - 80 Amps £82

- INPUT 420 V
OUTPUT 0/440 V
Change per step 6.5 V (1.6%)
- 30 Amps £37
 - 40 Amps £62
 - 60 Amps £73
 - 80 Amps £90

RECTIFIER SETS

- 400/440 V 3 Phase Input
- 12 V 210 Amps £98
 - 24 V 105 Amps £98
 - 36 V DC 50 Amps £51
 - 200/250 V DC 18 Amps £60

SPECIFIC ENQUIRIES are invited for Transformers and Rectifiers. We specialise in HEAVY CURRENT EQUIPMENT.

HARMSWORTH, TOWNLEY & CO.
2 JORDAN STREET, MANCHESTER 15. CENTRAL 5069

Introducing the *Redifon* Type RA.10

Now being supplied to the
British Post Office and
Cable & Wireless Limited

A NEW TRANSISTORISED SSB/ISB RECEIVER ADAPTOR

- DSB/SSB/ISB Reception.
- Full, partially suppressed or totally suppressed carrier.
- Upper/Lower Sideband Selection.
- AFC correction ± 3 Kc/s:
- Self-contained - A.C. Power Unit and Dual A.F. Amplifiers.
- Built-in monitor speaker and tuning indicator.



Facilities:

Reception of:

- (a) DSB full carrier signals using either sideband—reconditioned or local carrier with AFC or local carrier without AFC.
- (b) SSB partially suppressed carrier signals (up to 26 dB) using upper or lower sideband—reconditioned or local carrier with AFC or local carrier without AFC.
- (c) SSB totally suppressed carrier signals using upper or lower sidebands—local carrier without AFC.
- (d) ISB partially suppressed carrier signals (up to 26 dB)—reconditioned or local carrier with AFC or local carrier without AFC.
- (e) ISB totally suppressed carrier signals—local carrier without AFC.

Input Impedance:
75 ohms.

Input Levels:
0.1 Volt, r.m.s.

Unwanted Sideband Rejection:
Better than 50 dB.

Intermodulation products:
Better than 30 dB down.

Automatic Frequency Control:
Up to ± 3 Kc/s.

A.F. Response:
300-3000 c/s. within 6 dB.

A.F. Output:

- (a) 1.5 W. at 3 ohms for external loudspeaker.
- (b) 0.5 W. at 3 ohms for internal speaker.
- (c) 6 mW at 600 ohm balanced (upper sideband).
- (d) 6 mW at 600 ohm balanced (lower sideband).
- (e) Low Impedance headphones output, internal speaker muted when in use.

Tuning Indicator:

A meter is provided to assist in tuning the adaptor.

Power Supply:
100/125 and 200/250 V.
50/60 c/s. Single Phase, A.C.

Power Consumption:
30 W. approx.

Dimensions:
19in. wide x 3½in. high x 13½in. deep.

Weight:
27 lbs.

The RA.10 is completely self-contained with A.C. Power Unit and built-in dual A.F. Amplifiers, thus eliminating the need for interfering with existing Receiver power and audio wiring. Separate audio outputs associated with the upper and lower sideband are provided and a monitor speaker may be switched to either channel as required. The use of transistors reduces the size, weight power consumption and heat dissipation to a minimum.

For the reception of DSB/SSB and ISB signals with Communication Receivers such as the Redifon type R.151, R.145 or R.150, or any Receiver which will provide 0.1 Volt R.F. Input between 95-950 Kc/s.

REDIFON LIMITED

Communications Sales Division, Broomhill Road, London S.W.18 • Tel: VANdyke 7281

A Manufacturing Company in the Rediffusion Group

WAY AHEAD!

We have pleasure in announcing a completely new range of mobile V.H.F. equipment incorporating transistorised circuitry. Included in the range is a new fixed station equipment of advanced design.

NEW




Type 80. 5 watt mobile for dash-board mounting.

NEW



Type 70. 15 watt mobile for boot mounting.

NEW



Type 400/100. 15 watt fixed station.

NEW



Type 90. 5 watt motorcycle transmitter/receiver for tank mounting.

NEW



Type 90 for rear mounting.

These new sets meet the latest channel spacing requirements.

BRITISH COMMUNICATIONS CORPORATION LTD

Second Way . Exhibition Grounds . Wembley . England

Telephone : Wembley 1212

Telegrams : BEECEEE, Wembley

BCC




SEALING

Not even a Suflex Polystyrene Capacitor is at its best if moisture gets beyond its protective shell. Polystyrene being non-absorbent, no permanent harm would be done, but there might be a temporary loss of performance. Suflex Capacitors are therefore sealed with particular care, using new and most effective techniques. In any climate, in any part of the world, under all conditions, the Suflex Polystyrene Capacitor is as snug as a pica in a pod, maintaining stability, insulation resistance, good power factor.



Suflex Polystyrene Capacitors

SUFLEX LTD. 35 Baker Street, London W.1 Telephone: WELbeck 0791

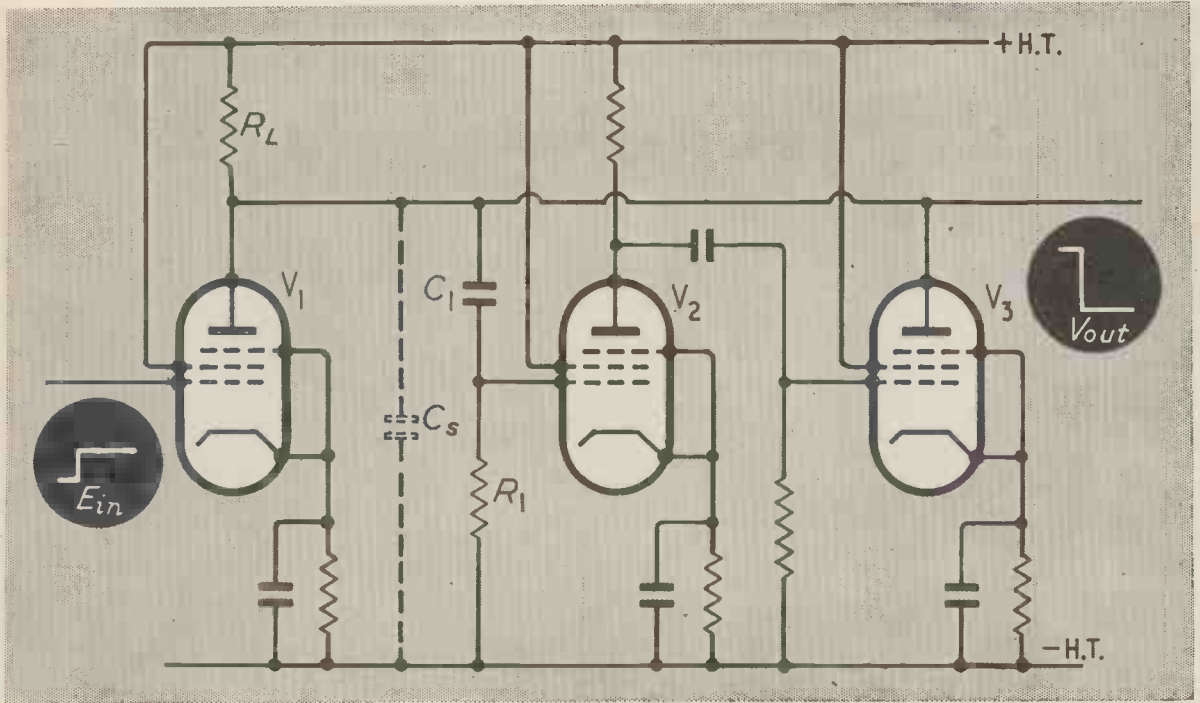

Linear Amplifier for Decimicrosecond Pulses

In the September issue of *Electronic & Radio Engineer* there is a description of an amplifier for decimicrosecond pulses. The effect of inevitable shunt capacitance C_s across a load resistance R_L is largely nullified by a subsidiary amplifier which provides its charging current.

Original articles by leading authorities are a prominent feature of ELECTRONIC & RADIO ENGINEER. Regular readership will keep you in constant touch with progress in the entire field of electronics, radio and television.

ARTICLES IN THE OCTOBER ISSUE INCLUDE

Electronic Co-ordinate Transformer.

This article describes an electronic analogue calculating unit which has been designed to convert an expression in rectangular co-ordinate form to polar co-ordinate form.

Transistor 'h' Parameters.

An experimental investigation, made in order to develop a test-set for the measurement of the complex 'h' parameters of a transistor, is described in this article.

POST THIS COUPON TODAY

TO: ILIFFE & SONS LTD., DORSET HOUSE, STAMFORD STREET, LONDON, S.E.1.

Please enter my name as a subscriber to—
ELECTRONIC & RADIO ENGINEER for 12 months
 commencing with the October issue. I enclose remittance
 £2 9s. (U.S.A. and Canada, \$7.50).


NAME

ADDRESS.....

DATE.....

ORDERS CAN ALSO BE PLACED THROUGH ANY NEWSAGENT.

ELECTRONIC & RADIO ENGINEER

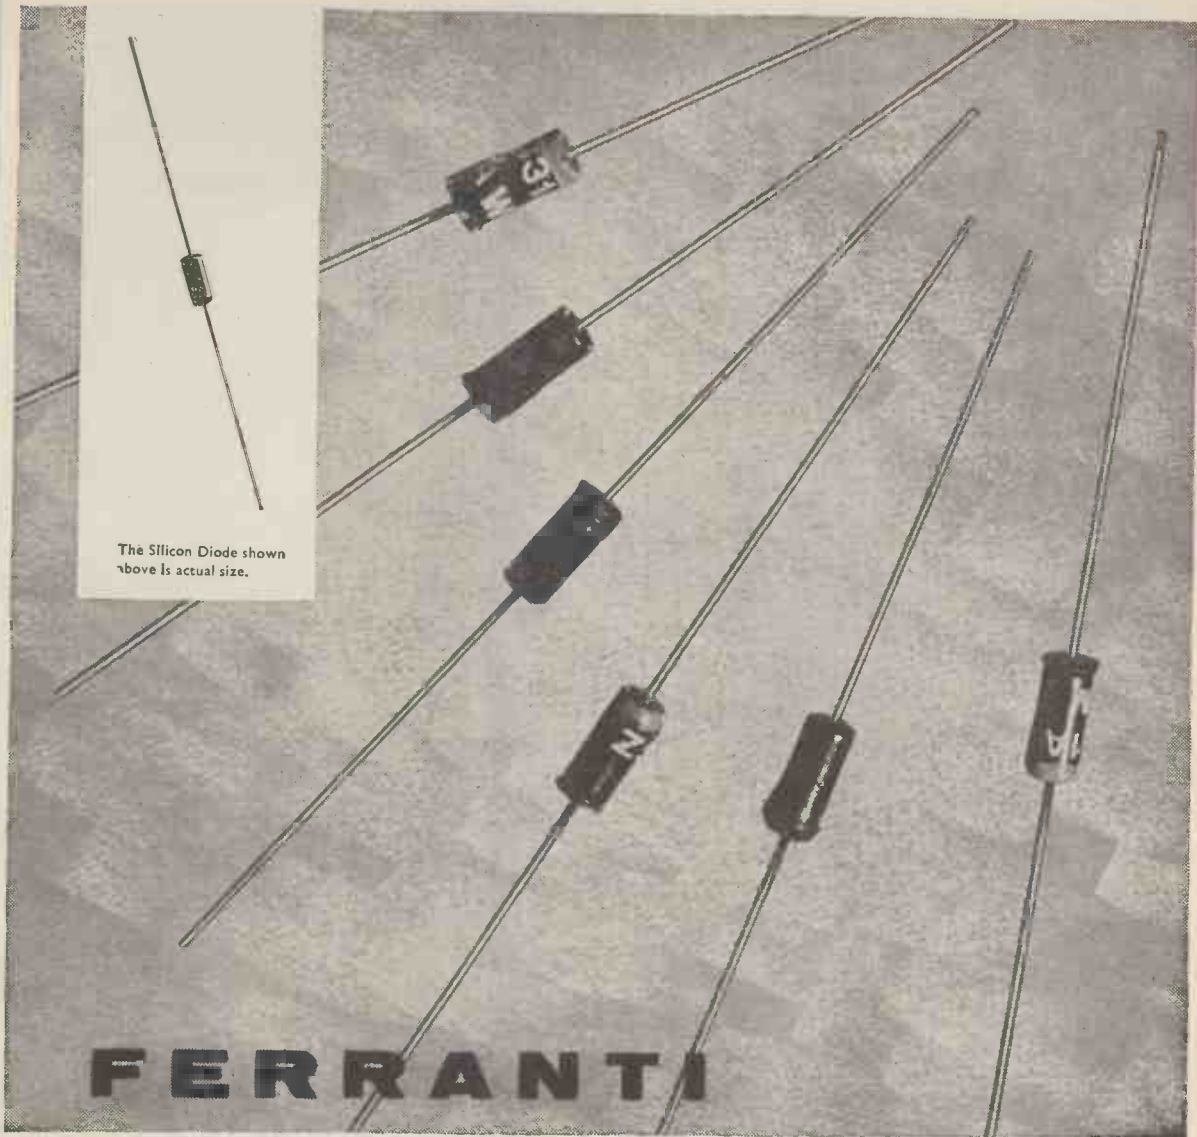

The Silicon Diode shown above is actual size.

FERRANTI

Silicon Diodes ZS30 series

for MINIATURIZED Circuitry

SPECIAL FEATURES

- AUTOMATIC WIRING TECHNIQUES
- HIGH TEMPERATURE OPERATION
- HIGH RECTIFICATION EFFICIENCY
- HIGH POWER TO SIZE RATIO
- HIGH FORWARD CONDUCTANCE
- RUGGEDISED CONSTRUCTION

Ferranti Miniaturized Circuit Diodes are designed for automatic wiring techniques. These diodes, in addition to being run at maximum ratings for forty-eight hours, are rigorously tested to satisfy the following conditions:

Vibration	Grade I (Aero Engines)
Shock	> 500 g.
Humidity	Class HI
Temperature Range	-70°C to + 135°C.



FERRANTI LTD · GEM MILL · CHADDERTON · OLDHAM · LANCs · Tel: MAIn 6661
 LONDON OFFICE: KERN HOUSE, 36, KINGSWAY, W.C.2. Telephone: TEMple Bar 6666





TROPICALISED EARPHONE AND MICROPHONE INSETS

For Military and Commercial
Communications

These three new Amplivox magnetic insets developed in conjunction with R.A.E. Farnborough have



Low mass and high speech intelligibility and are fully Tropicalised, pressure equalised and service approved

- (1) 13125 Mask Microphone and Switch with response specially designed for oxygen mask use.
- (2) 13150 Miniature earphone designed for maximum speech intelligibility.
- (3) 13750 Noise Cancelling Microphone giving up to 35 dB reduction of ambient noise.

ARB Approved and NATO Designated

Other Products

Headphones, Headsets and Helmets, Microphones and Earphones, Communication Systems, Ear Defenders, Extruded Cordage and Cables

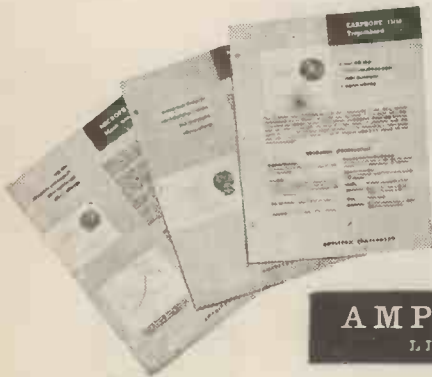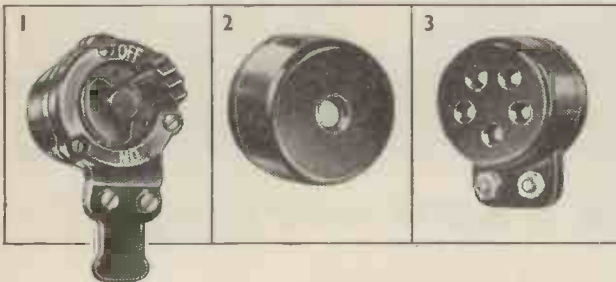

send today
for these
leaflets.

AMPLIVOX
LIMITED

INDUSTRIAL DIVISION

Beresford Avenue Wembley, Middlesex

Telephone: WEMbley 8991

Telegrams & Cables: Amplivox, Wembley

NEW—A MARCONI GENERAL-PURPOSE OSCILLOSCOPE

Type TF 1330

- * D.C. to 15 Mc/s pass band
- * 50 mV/cm sensitivity
- * .02 μ sec/cm writing speed
- * 10 kV e.h.t. for bright clear trace
- * Direct-reading time and voltage calibration independent of X-expansion or Y-gain

BRIEF SPECIFICATION

Y Amplifier BANDWIDTH: D.C. to 15 Mc/s. RISE TIME: 0.025 μ sec. SENSITIVITY: Seven ranges, 50 mV/cm to 50 V/cm. AMPLITUDE MEASUREMENT: 2% accuracy. INPUT: Two switched coaxial inlets. Impedance: 1 M Ω , 30 μ F. *Optional probe:* 10 M Ω , 7 μ F. DISTORTIONLESS SIGNAL DELAY: 0.25 μ sec.

X Amplifier BANDWIDTH: D.C. to 2 Mc/s. EXPANSION: Up to at least $\times 5$. EXTERNAL INPUT: D.C. coupled; 1 M Ω , 25 μ F.

Sweep Generator SWEEP VELOCITY: 15 ranges, 0.1 μ sec/cm to 1 sec/cm at minimum expansion. TIME MEASUREMENT: 2% accuracy. TRIGGER SELECTION: A.C. coupled, D.C. coupled, TV field sync, or Automatic.

General TUBE: 5 inch, spiral accelerator. POWER SUPPLY: 200-250 and 100-150 V. WEIGHT: 48 lb. PRICE (complete): £300, F.O.B. U.K. port.

Please send for leaflet G 154.



MARCONI INSTRUMENTS

AM & FM SIGNAL GENERATORS · AUDIO & VIDEO OSCILLATORS
FREQUENCY METERS · VOLTMETERS · POWER METERS
DISTORTION METERS · FIELD STRENGTH METERS
TRANSMISSION MONITORS · DEVIATION METERS
OSCILLOSCOPES, SPECTRUM & RESPONSE ANALYSERS
Q METERS & BRIDGES

Please address enquiries to MARCONI INSTRUMENTS LTD. at your nearest office:


London and the South:
Marconi House, Strand, London, W.C.2
Telephone: COVent Garden 1234

Midlands:
Marconi House, 24 The Parade, Leamington Spa
Telephone: 1408

North:
23/25 Station Square, Harrogate
Telephone: 67455

Export Department: Marconi Instruments Ltd., St. Albans, Herts. Telephone: St. Albans 56161

meters

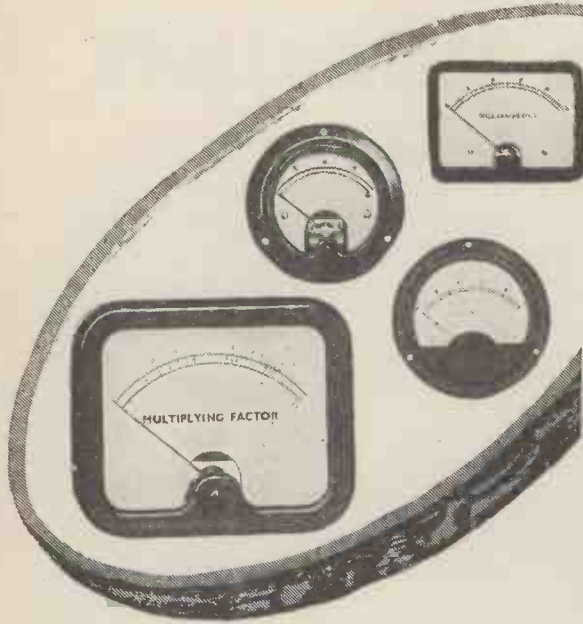

à la Anders

Meters *à la Anders* are meters *à la carte*: Any desired non-standard meter, prepared specially in the required size, shape, current or voltage level and range. All leading makes. Dials individually drawn. Singly or in batches. All calibrations personally checked by the *Chef* engineer. All patrons' requests—however exotic—carried out without delay: standard ranges from stock, special meters 7-14 days.

Meters, Electronic & Test Equipment to individual specifications.

Anders
electronics LTD


103 Hampstead Road, London, N.W.1 • Tel: EUSton 1639

DGIMOS approved
Contractors to G.P.O. and Government Departments

Is this the answer?

P.O. Type 3000

The most versatile relay available today.
Coils up to 120,000Ω
Spring Set Insulation up to 5KV

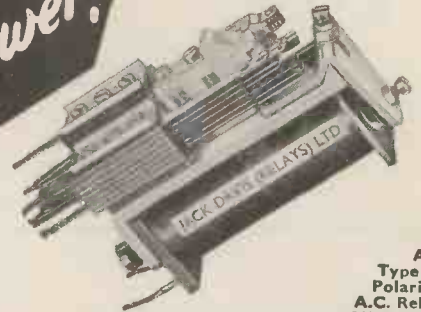

Also
Type 600
Polarised
A.C. Relays
High Speed
Uniselector
Key Switches
Latching Relays
Magnetic Counters
Miniature Sealed Relays

Are you aware of the variety of contact build-ups we can assemble? Your problem may not be as bad as it seems if you take advantage of our wide experience in the unlimited use of this adaptable product.

- Quotation by return.
- Prototypes within 48 hours.
- Good delivery guaranteed.

Consult the Specialists!

Jack Davis (Relays) Ltd.

(DEPT. W.) TUDOR PLACE, LONDON, W.1
TELEPHONES: MUSEUM 7960 LANGHAM 4821

Valradio

The first name you think of for

DC/AC CONVERTERS

TRANSISTORISED, ELECTRONIC AND VIBRATOR MODELS

available for operating practically anything—from an electric shaver to a television—from battery or DC Mains supply.

Valradio

Dept. WW/C • Browells Lane • Feltham
Middlesex Feltham 4242
London Office:
57 Fortress Rd., N.W.5. GULLiver 5165



STEREO

—FOR PEOPLE WHO MUST HAVE THE BEST

DYNATRON have nearly 30 years experience in building the best possible equipment for reproducing sound. Their leadership is based on three things. Advanced design. Scrupulous attention to detail. And the narrowest tolerances in the industry. This last point is especially important to Stereo enthusiasts. For it ensures that matching units really do match. Without this, stereo fidelity is impossible. Dynatron is never cheapest: it is always best!



LF15CS



LF16CS.



TC16CS.

LF15.CS. POWER AMPLIFIER £20.5.0. 4-valve push-pull LF Amplifier, with auxiliary power supply for tuners, etc. 10 watts undistorted output. F.R. 15-30,000 c/s flat within 0.5db. Neg. Feedback 20db. Hum and noise 80db. below 10 watts. 1 volt R.M.S. input for full output.

LF16.CS. POWER AMPLIFIER £17.10.0. Specially designed as second channel amplifier in stereophonic systems. Specification identical to LF15 but auxiliary power outputs omitted. Mains output socket for gramophone or tape deck motors.

TC16.CS. PRE-AMPLIFIER £27. This very high performance unit comprises identical twin pre-amplifiers with a comprehensive control system. Duplicated inputs for magnetic or ceramic pick-ups, Radio and tape deck. Two output sockets for recording purposes. Pick-up equalisation by selective negative feedback. Frequency response 60-15000 c/s within ± 1.0 db.

STEREOPHONIC
OR MONOPHONIC

DYNATRON

BUILD
TO
LABORATORY
STANDARDS

COUPON


Will you please send me a copy of the **DYNATRON** 'High Fidelity Audio Equipment' brochure

NAME _____

ADDRESS _____

DYNATRON RADIO LIMITED,
Depl. 4, St. Peter's Road, Furze Platt, Maidenhead, Berks.
Telephone: Maidenhead 5151/2

The S31 Oscilloscope

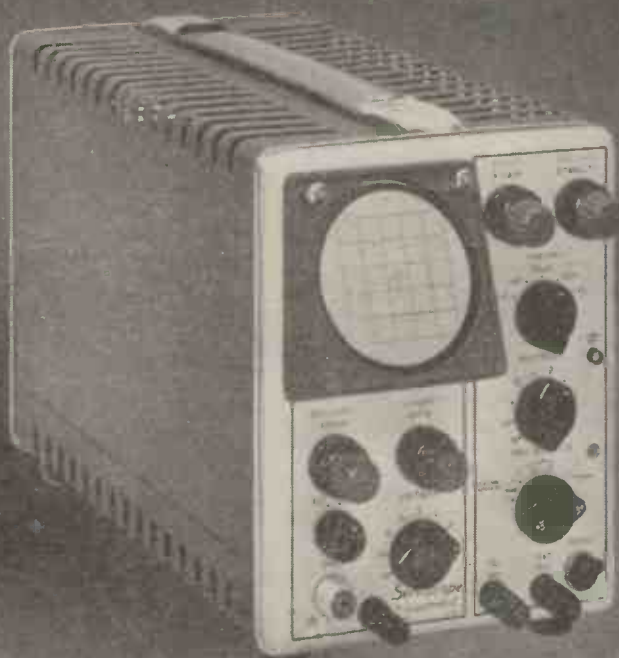

the standard by which others are now judged

The type S31 Oscilloscope is an improved version of the now famous Serviscope.

It is extremely compact (8½ in. x 6½ in. x 13 in.) and has a performance and specification unequalled by many much larger instruments.

The D.C. coupled amplifier (-3db at 6 Mc/s), voltage calibration, wide-range calibrated time base (5 sec. to 1 μ sec. per cm.) and a precision flat-faced C.R. Tube are only a few of the features that put the S31 far ahead of any other portable scope.

TELEQUIPMENT LTD

313 Chase Road · Southgate · London N.14 · Tel: Fox Lane 1166

STEREO

AIRMEC

STEREO

AIRMEC

Today you can enjoy the ultimate reality of Hi-Fi with this superb
STEREO AMPLIFIER

Designed specifically for the serious stereophonic enthusiast and available at a really competitive price.

**10 WATTS
OUTPUT ON
EACH CHANNEL**

No additional pre-amps required.



RETAIL PRICE

£33. 10. 0

FEATURES FOR THE DISCRIMINATING

- Two identical matched power amplifiers, two identical pre-amplifiers, on a single chassis.
- High sensitivity suitable for all types of high fidelity pickups.
- C core transformers for high efficiency and small magnetic field.
- Switched tone controls for accurate matching between channels, with true "flat" position.
- Separate tone controls for each channel to enable the response of the separate channels to be controlled on monaural sound.
- Separate inputs for pickups, tape decks and radio.
- Recording characteristic correction for 78 and L.P. records.
- Long switch spindles and separate escutcheons to enable amplifier to be built into customers' cabinets.
- Power available to drive tape deck or radio feeder unit.

WRITE FOR LEAFLET

STEREO AMPLIFIER

AIRMEC LIMITED : HIGH WYCOMBE : BUCKS
Telephone: High Wycombe 2060

Airmec




Transistorised Four-Channel Mixing Units


This Pye fully transistorised 4-channel Audio Mixing Unit meets the need for a portable high-gain mixing amplifier which may be used with equal facility for sound and TV outside broadcasts, auxiliary studio installations or for augmenting and, in an emergency replacing, existing mixing facilities. The removable A.C. mains power unit can be quickly replaced by either an accumulator unit or a dry battery unit. Robust and light—it is easily carried in a brief case—this unit will prove invaluable to mobile recording and news-coverage teams.



Type 3053 Pye Audio Mixing Unit

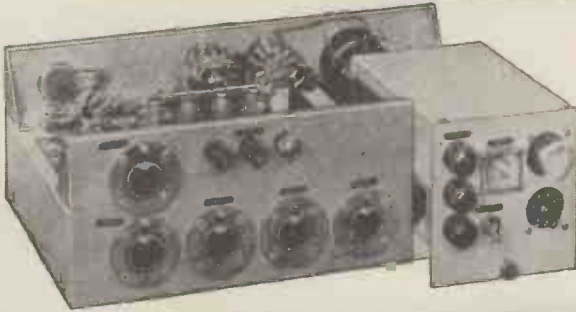

The rear view of the Audio Mixing Unit (Type 3053) shows the A.C. mains unit partially withdrawn. Any of the power input units which can be supplied as accessories (shown below) to the mixer can be inserted in the position shown. As well as the mains input socket and fuses, the picture shows the 4 channel input sockets, the output sockets and terminals.

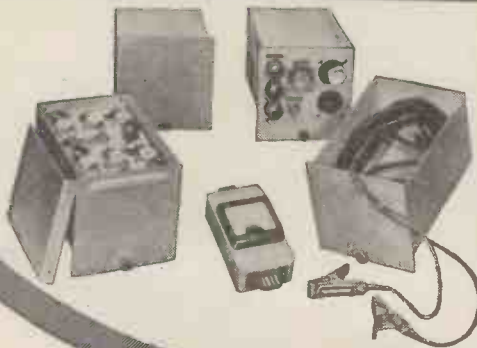

On the Audio Mixing Unit (Type 3803) a peak programme meter is provided in place of the VU Meter together with its associated PPM Amplifier.

PYE LIMITED
Sales Department
television Transmission Division
CAMBRIDGE




EMPRESS

RADIOGRAM AND TUNER CHASSIS

STEREOPHONIC AND A.M./F.M.


S.S.8 STEREO R.G. CHASSIS 26 Gns.

8 Valves. Ganged Bass and Treble Controls.
 Dual Volume Controls with Concentric Knobs.
 3 Wavebands: L. M. and F.M.
 Built-in Ferrite Aerials.
 Extremely High Sensitivity on F.M.
 3 Position Amplifier Switch.
 1. R.H. Channel only (Monaural)
 3½ watts Gram or Radio.
 2. R. & L.H. Channels (Monaural)
 7 watts Gram or Radio.
 3. R. & L.H. Channels (Stereo)
 7 watts.
 Dipole and all leads supplied.
 Dial size 15in. x 6in. 15 ohm. outputs.

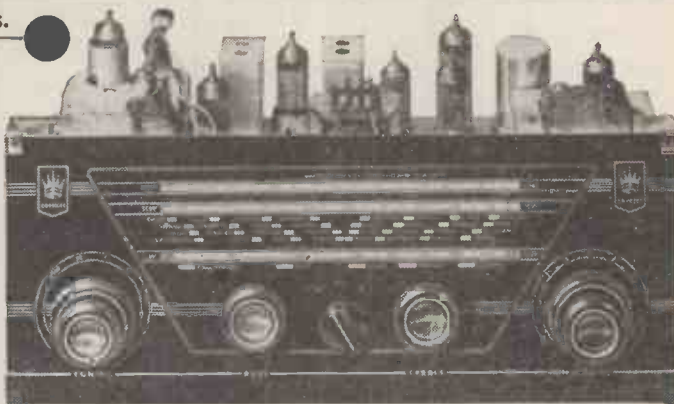


R.G.9 A.M./F.M. CHASSIS 25 Gns.

9 Valves. Push Pull Output. 6 Watts.
 Built-in Ferrite Aerials.
 Magic Eye Tuning.
 Extremely High Sensitivity on F.M.
 4 Wavebands. L. M. S. & F.M.
 Dipole and all leads supplied.
 Dial size 15in. x 6in.
 15 ohm. output.

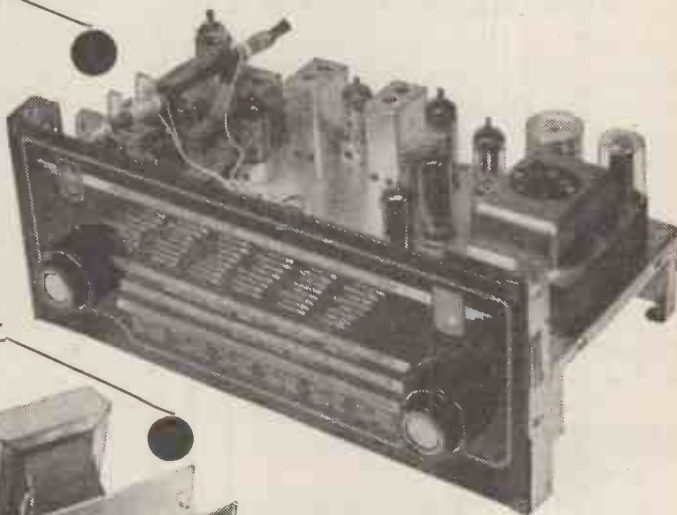

T4 F.M. TUNER CHASSIS 13 Gns.

4 Valves. Self Powered. Low Radiation.
 High Sensitivity. Permeability Tuned.
 Frequency Range 85—100 mc/s.
 Dimensions L. 11½in. H. 4in. D. 5½in.
 Dipole supplied.

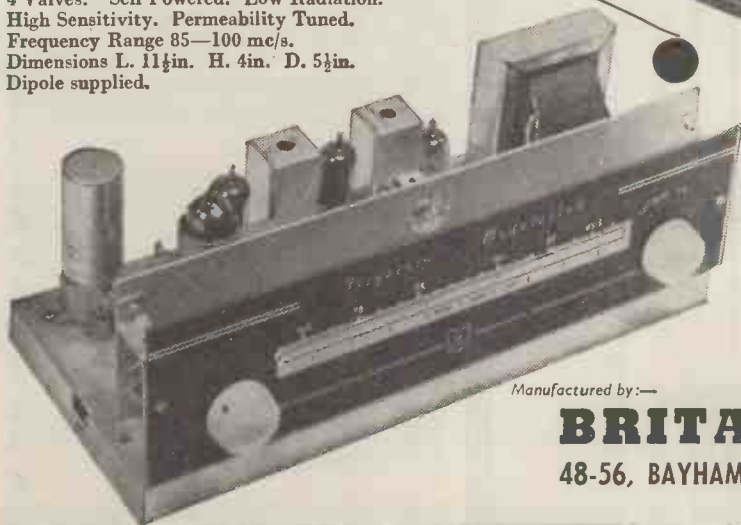

OTHER MODELS

- RG6. 6v. A.M./F.M. Radiogram Chassis—21 Gns.
- FMT5.5v. A.M./F.M. Tuner Chassis—19 Gns.
- SA4. 4 Valve Stereo Amplifier—£8.0.0d.

Manufactured by:—


BRITAMER LIMITED

48-56, BAYHAM PLACE, LONDON, N.W.1.

Telephone No. EUSton 7841-3

A REVOLUTIONARY NEW BRITISH INVENTION!

- ★ Uses standard tapes
- ★ Plays at 7½" per. sec. or 3 other speeds
- ★ Records direct from radio or microphone
- ★ Erase and fast rewind

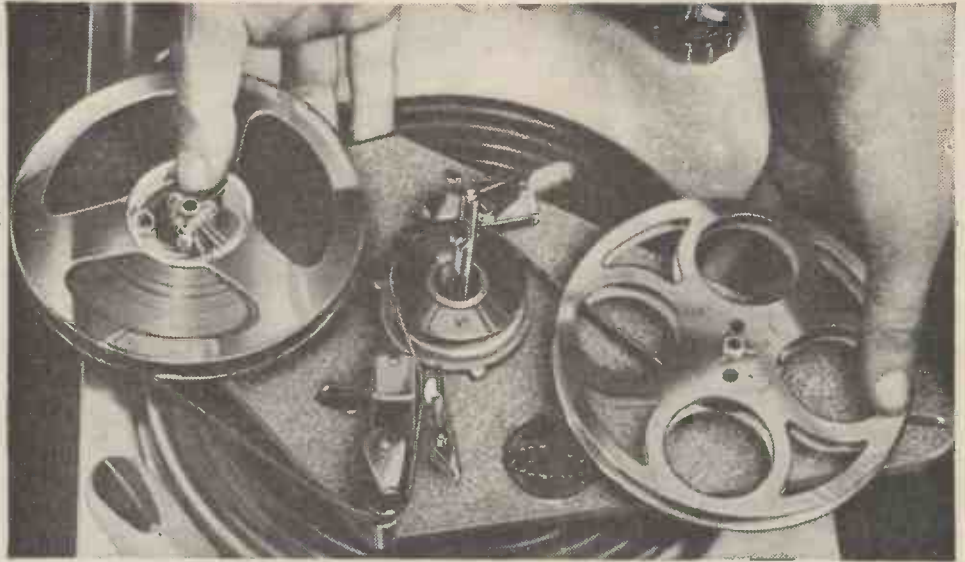

FULLY
GUARANTEED

Instantly turns any gramophone into a first-class Tape-Recorder and back into a record-player in a moment!

Gramdeck is completely *new* . . . a revolutionary and ingenious invention that instantly turns your gramophone into a tape-recorder and back into a gramophone at will! Slip the Gramdeck on to your turntable and you have the finest tape-recorder you've ever heard! Lift it off . . . your gramophone is ready to play records again. There are no motors or valves to go wrong—and you get a quality of reproduction that has to be heard to be believed!

Everyone is praising the Gramdeck. "The quality is at least equal to that obtained from a good microgroove disc," says a leading professional journal.

WORKS FROM ANY RECORD PLAYER OR RADIOGRAM

Gramdeck records and reproduces with a wonderful depth and breadth of tone. Because it uses equipment that is already in your gramophone it only costs a fraction of the high-quality tape-recorder you would normally require. Full details, specifications, photographs, easy terms, etc., are given in the Gramdeck Book. Send for your FREE copy, today.

MADE BY THE FIRM THAT MAKES MICROWAVE WAVE-GUIDES FOR VISCOUNTS AND BRITANNIAS

£17-11-0 Complete with Lustraphone moving-coil microphone.

£13-12-0 Without microphone or tape.

EASY TERMS

"Ingenious—simple . . . why on earth did no one think of it before!"—THE TAPE RECORDER.
 "Ingenious and robust."—BRITISH SOUND RECORDING ASSOCIATION JOURNAL.
 "Quality of reproduction excellent . . . real hi-fi results . . . potential is tremendous . . . both designer and manufacturer should be congratulated."
 —BRITISH RADIO & T/V RETAILERS' REVIEW.
 "Better than many so-called hi-fi recorders . . . robust . . . carefully designed . . . excellent value."
 —AMATEUR CINE WORLD.

Free!



FREE BOOK—POST NOW!

I would like to know how to turn my gramophone into a first-class tape-recorder . . . please send me the Gramdeck Book—FREE and without obligation. (Write if you prefer not to cut coupon.)

NAME

ADDRESS

Gramdeck
GRAMOPHONE TAPE RECORDER
HIGH QUALITY TAPE-RECORDING FOR EVERY HOME


Gramdeck (Dept. WW/802) 29 Wright's Lane
Kensington, London, W.8

GRAMDECK TURNS A TURNTABLE INTO A TAPE-RECORDER

XS2

Dry Reed Relay Insert

A gold plated relay contact hermetically sealed in inert gas for absolute reliability, high speed and low contact bounce.



maximum current...	...	250 mA
maximum resistive load	...	15 W
maximum closed resistance...		50 mΩ
maximum open resistance...		$5 \times 10^{-6} \Omega$


nominal operate ampere turns	120 AT
nominal release ampere turns	60 AT
operate time less than	... 2 mS
bounce time less than	... 0.5 mS
release time less than	... 0.5 mS

our Technical Service Department is ready to provide further details of characteristics or application.

Switch to Cold Cathode Tubes

for the most modern electronic switching and control systems

Hivac cold cathode tubes provide flexibility, economy, long life and reliability

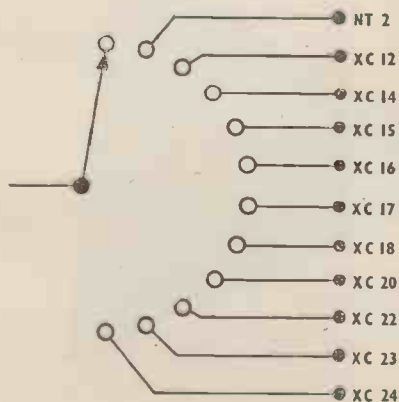

the range includes

- diodes
- stable diodes
- difference diodes
- triodes and
- tetrodes

our Technical Service Department is ready to provide further details of their characteristics or application.

Hivac Limited

STONEFIELD WAY · SOUTH RUISLIP · MIDDLESEX
Telephone: Ruislip 3369


A member of the Automatic Telephone and Electric Group




use

AMP


solderless wiring devices

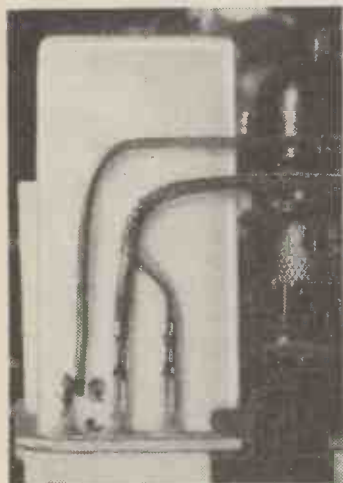


Taper Tab terminations used on co-axial cable

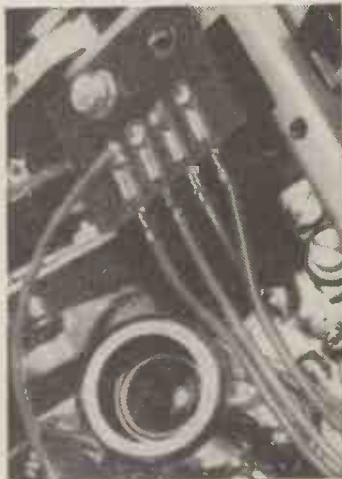

Edge-on connectors on printed circuit board

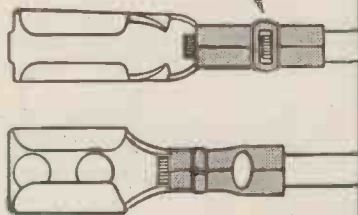

Sobell 17" portable T.V. plus V.H.F. radio receiver, employing devices illustrated above

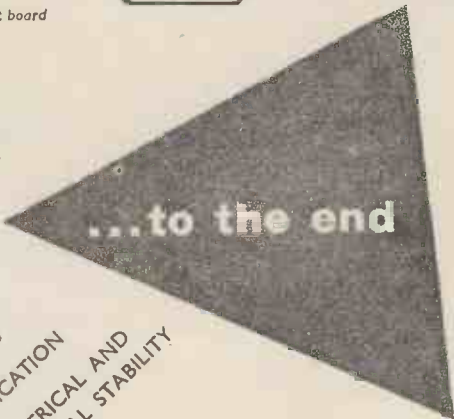

- ▲ RELIABLE PERFORMANCE
- ▲ LOWER APPLIED COSTS
- ▲ QUICKER APPLICATION
- ▲ HIGH ELECTRICAL AND MECHANICAL STABILITY



WRITE NOW ABOUT THE CREATIVE APPROACH TO BETTER WIRING AIRCRAFT-MARINE PRODUCTS (GT. BRITAIN) LTD.

London Office: Dept. 14, 60 Kingly Street, W.1. Telephone: REGent 2517-8 and 3681-2-3

Works: SCOTTISH INDUSTRIAL ESTATES, PORT GLASGOW, SCOTLAND

* Trade Mark of AMP incorporated, U.S.A.

AP-89

from AIRPORT

to ZYMURGISTS

Multitone leads in pocket staff location



By far the largest number of hospital and industrial installations of the pocket receiver type in this country, and overseas, are Multitone. Our selective induction system "Personal Call" is saving time, money and worry in well over 100 different types of industrial concerns from airports to zymurgists. (We are looking for a Quill Manufacturer to complete the alphabet.)

The new MULTI-CHANNEL equipment provides over 400 individual channels using the new flat Receiver (as illustrated).

THE MULTITONE

personal call

system of staff location

(the 'peep-peep' in the pocket), the only staff location system worth installing.

Write or 'phone for further particulars. We can be found in 10 seconds.

MULTITONE ELECTRIC COMPANY LTD., 12/20 Underwood St., LONDON, N.1. (CLERkenwell 8022)

Additional Facilities

ELECTRONIC TRUNCHEON

The Electronic Truncheon is no bigger than standard equipment carried by guards and serves the same purpose, but inside there is a transmitter which, when the button is pressed, sends out a signal. This is picked up by the loop of wire around the area to be protected. The pulse is used to operate a small receiver, which automatically switches on any form of electrical alarm. It can be operated from any point in the area.

INTERNAL TRANSPORT COMMUNICATION

The Multitone "Personal Call" loudspeaker-receiver has been designed to solve the problem of conveying verbal instructions to transport vehicles used for handling loads inside a given area. Messages can be conveyed to all or selected vehicles from the central transmitter.

MULTITONE INDUCTION SYSTEMS CAN SOLVE YOUR STAFF LOCATION PROBLEMS

- ★ Equally suitable for large and small areas or concerns
- ★ Low rental terms
- ★ Virtually no internal wiring

LIST No 70 $\frac{1}{8}$ BIT

THE tool for Electronic Circuits
also by



Soldering Equipment

SHARP HEAT FOR QUICK
jointing of transistors, resistors, and
all classes of miniature components

SUPPLIED IN ALL
VOLT RANGES

ADCOLA
"LONG LIFE" Bits
FROM STOCK

ILLUSTRATED ACTUAL SIZE

Electrical standards approved in all
leading countries

Catalogues of the Adcola patented
and registered design soldering
equipment on request from

Head Office, Sales and Service

ADCOLA
PRODUCTS LTD.
GAUDEN ROAD
CLAPHAM HIGH ST.
LONDON, S.W.4

Telephones:—
MACaulay 4272 and 3101



problems
can be solved with

S.S.WHITE
FLEXIBLE
SHAFTING

THE "impossible" becomes
practical with the applica-
tion of flexible shafting.

We are experts in this rapidly
developing field and can show
you how to operate any element
requiring rotation or push-pull
movement, or both. Distance
from control to point of applica-
tion presents no difficulty.

Consult us on any of your
remote control problems.

Flexible Shaft Handbook available to
technicians on request to Dept. W.



FLEXIBLE SHAFTING FOR
REMOTE CONTROL POWER
DRIVES AND COUPLINGS.


S.S. White

INDUSTRIAL DIVISION

THE S. S. WHITE DENTAL MFG. CO. (G.B.) LTD.
Britannia Works, St. Pancras Way, London, N.W.1.
EUSton 5393 R.C.5

ask

SIMA

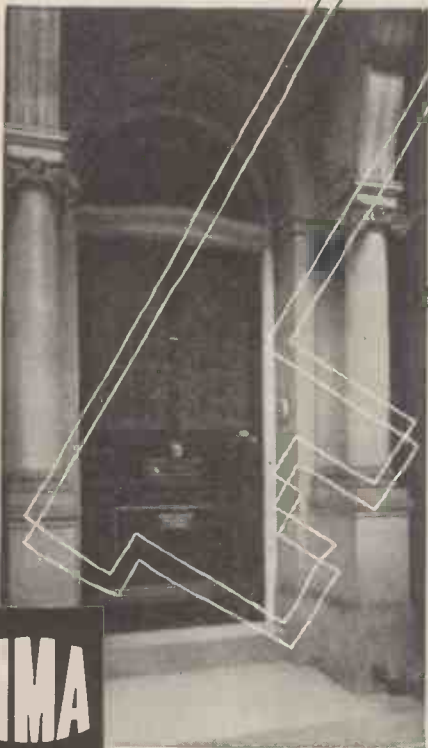

INSTRUMENT CENTRE
20 QUEEN ANNE STREET, LONDON W.1

Telephone: IMPerial 6000

Press Enquiries: LANGham 4251

the key to information

and advice on :

- ★ Electronic and nuclear instruments
- ★ Navigational and survey equipment
- ★ Optical and ophthalmic instruments
- ★ Laboratory, medical and X-ray apparatus
- ★ Instruments for process control and automation
- ★ Kinematograph and allied instruments
- ★ All industrial instrumentation

Space donated by: SIEMENS EDISON SWAN LTD.,
155 CHARING CROSS ROAD LONDON, W.C.2



THE SCIENTIFIC INSTRUMENT MANUFACTURERS' ASSOCIATION

Armstrong WIRELESS & TELEVISION CO. LTD., WARLTERS RD., LONDON, N.7
Tel.: NOR 3213

NEW AMPLIFIER AND CONTROL UNIT

Illustrated is a COMPLETE STEREO AMPLIFIER (£29/10/-) consisting of one Control Unit and two A6 Amplifiers. Each Unit plugs directly into the back of another—simple but ingenious. The Control Unit with one Amplifier plugged into it (£19/12/6) can be used as a straightforward MONAURAL AMPLIFIER allowing subsequent conversion for STEREO at any time in the future by simply plugging in a further A6 Amplifier. In addition, the Control Unit with one Amplifier can be used as a Stereo-Converter to adapt an existing amplifier or radiogram chassis.

The illustration shows all three units plugged together but a connecting lead can be supplied should you wish to separate them.



A6 AMPLIFIER £9.17.6

● 6 watts Push Pull High Fidelity Output. ● Frequency Response 15-35,000 c.p.s. \pm 2dB. ● Distortion. Less than 0.5%. ● 14dB Negative Feedback. ● Loudspeaker Output 3, 7½ and 15 ohms. ● 13in. \times 3½in. \times 5in. high.

PCU21 CONTROL UNIT £9.15.0

● Stereo and Monaural Inputs for Pick-ups, Radio and Tape Playback. ● Stereo and Monaural Outputs for Tape Recording. ● Separate Wide Range Tone Controls. ● Infinite Balance Control. ● 13in. \times 4½in. \times 2½in. high.

Post this coupon or write for descriptive literature and details of Home Trial facilities, Hire Purchase Terms and Guarantee or call at our Holloway Showroom for full, unhurried demonstration and professional advice on your installation. Open 9-6 weekdays and 9-5 Saturdays.

NAME

ADDRESS

..... WOA

Supreme in any Sphere

TWO NEW LINES

by

S.G. Brown

FIST MICROPHONE

Moulded in Nylon, this attractively designed unit is weatherproof and almost Indestructible under the most adverse conditions. It has a positive action Double Pole Changeover Switch, and is available with either Carbon or Electro-magnetic Transmitter. When fitted with the E/M Inset it also operates as a Receiver. For use on Mobile Radio, Walkie-Talkie, Police Motor-Cycle Wireless, etc.



UNIVERSAL HANDSET

Moulded in Propionate—one of the toughest plastic materials ever produced, this beautifully styled, robust and lightweight instrument is designed to accommodate any known Transmitter or Receiver Inset. Built-in Double Pole Changeover Switch is also available. Standard Insets: Moving Coil, Electro-magnetic, Single Carbon and Double Button Carbon. For use on Radio Stations, Mobile Radio, Walkie-Talkie, Police Car-Radio, etc.



Handsets; Microphones; Headsets; Headsets with Boom Microphone; Headsets with Throat Microphone; Transmitter Insets; Receiver Insets; Hospital Headphones and Pillowphones; High Fidelity Headphones.

Details of all S. G. Brown products sent on request.

S.G. Brown LTD.

SHAKESPEARE STREET • WATFORD • HERTS

Telephone: Watford 27241

where landlines must end...



THE
'COUNTRY SET'
UNIT

CHIEF CHARACTERISTICS

Specifically designed to extend all normal telephone facilities over v.h.f. links. Operates on 156-184 or 54-84 MC/S band. Battery Version 12V 110 M/A Standby 1.15A Transmit. Mains operated exchange sets and relay sets are available to integrate with all types of exchanges (with R.F. powers up to 50W). Together with aerials, duplexers, etc.

...V.H.F. Rural Radio takes over!

When you're miles from civilisation with an important job to do, the telephone can play a vital part in solving problems. But perhaps physical conditions make the laying of cable or landlines difficult or uneconomic. What then? Why not let Rural Radio take over? This A.T.E./Marconi radio telephone is not limited to simple point to point service but can connect isolated subscribers into telephone exchanges of all types without introducing special operating procedures. Rural Radio equipment will also provide junctions between exchanges with all normal signalling facilities including dialling. Sets are available for operation from mains, or from car batteries.

AUTOMATIC TELEPHONE & ELECTRIC CO. LTD. STROWGER HOUSE, ARUNDEL STREET, LONDON, W.C.2
MARCONI'S WIRELESS TELEGRAPH CO. LTD. MARCONI HOUSE, CHELMSFORD, ESSEX



AT14931



PIN POINT SOLDERING

Transistors • Printed Circuits • Miniaturized Equipment

"AS LIGHT AS A PEN"

MODEL	VOLTAGE
C.240	230/240
C.220	220/230
C.125	120/130
C.115	110/120
C.50	48/52
A or B.6	6
A or B.12	12/13
A or B.24	22/26
A or B.28	26/28


INTERCHANGEABLE SPARE BITS

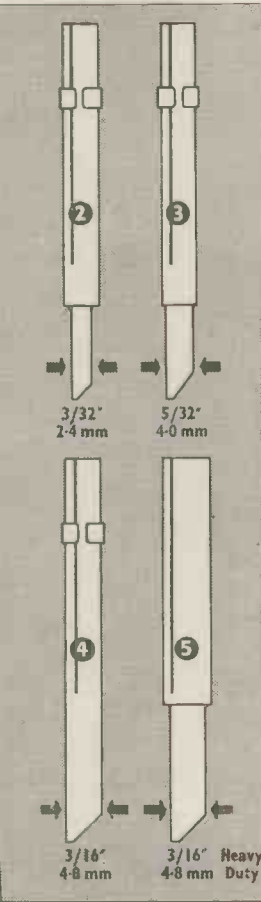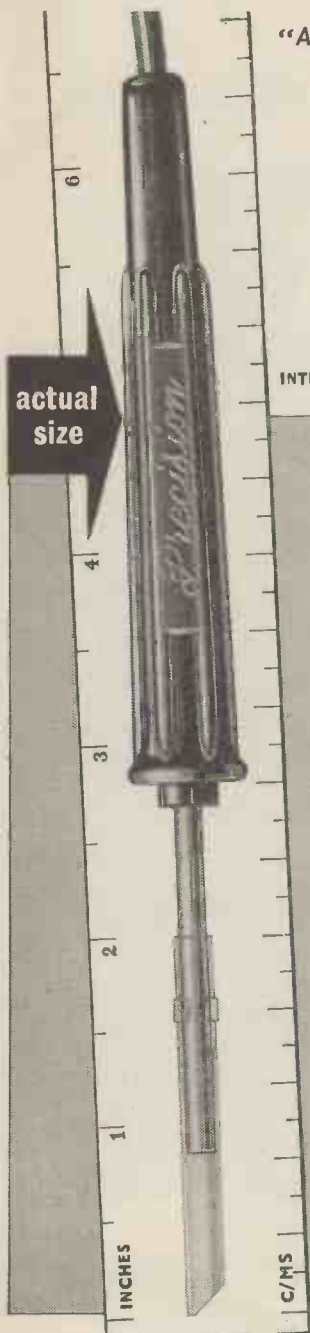

Precision
SOLDERING IRON

A.N.T.E.X LIMITED
7/8 IDOL LANE · LONDON · E.C.3
Tel.: MANsion House 2716

Now the A.L./120 at £29.10.0

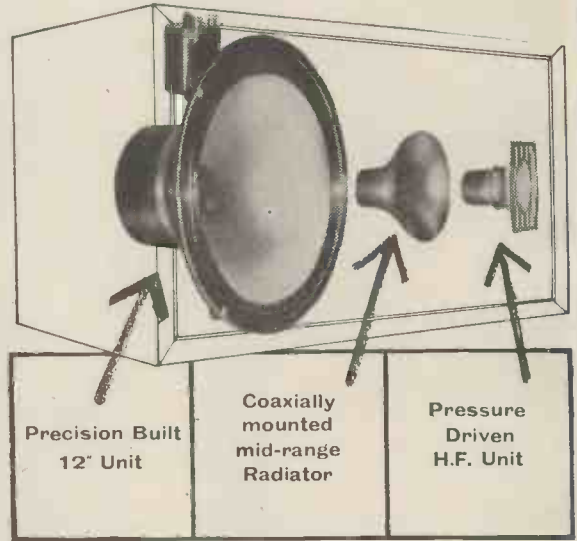

Few other systems can compete with the A.L./120 in performance and of these none can compete in price

The A.L./120 is an extremely compact full range multiple radiator High Fidelity Loudspeaker System, engineered to provide full scale performance at the lowest possible cost and in the smallest possible space. The A.L./120 measures only 24" x 11½" x 14½" and will handle a maximum power of 15 watts, with an overall frequency coverage of 35-20,000 c/s. The enclosure is made from thick non-resonant material, veneered and hard waxed polish, and will fit discreetly into any furnishing scheme.

GOODMANS

GOODMANS INDUSTRIES LIMITED

Post this coupon now for your FREE copy of the NEW HIGH FIDELITY LOUDSPEAKER MANUAL to:

GOODMANS INDUSTRIES LTD. Axiom Works, Wembley, Middx.

Tel.: WEMbley 1200 (8 lines) Grams: Goodaxiom, Wembley, England

Name

Address

.....

Europe's largest manufacturers and the World's largest exporters of High Fidelity Loudspeakers

G10WV

we can get you out of a rectifier problem

We, that's the M-O Valve Co. Ltd., have spent over 40 years bottling up hard valves, soft valves, tough going-aloft valves, standard valves, valves to government specs . . . so we know how you feel in there. But we're used to it, because now we've acquired a rare collective know-how that can beat most valve problems. And of course, it's backed by the brilliant research, progressive development and flexible production you'd expect us to have. Next time you're enveloped in a valve problem, let us know—if we haven't a ready-made type for you, we'll see if we can make you one to measure.



XENON FILLED TYPE. *The M-O V range will keep going a long time—and has better PIV safety ratings too.*

MERCURY VAPOUR TYPE. *We've had over 30 years of know-how in making this type of rectifier. As you'd expect, they're the best you can get. There's a range of eight.*

VACUUM TYPE. *Too many even to give you an outline. (Bi-phase, full-wave, high voltage, special quality, 450 to 28,000V rms.) Let us know what types you're interested in and we'll send you full details.*

S.E.C.

valves are obtainable from

THE M-O VALVE CO. LTD

BROOK GREEN · HAMMERSMITH · LONDON W.6

A subsidiary of the General Electric Co. Ltd

● TAPE RECORDERS		
Brenell Mark V.....	£87	4 0
Ferrograph 4A/N.....	£85	1 0
Grundig "Cub" transistorised.....	£27	6 0
Voxson WVA.....	£93	13 0
Windsor Viscount.....	£51	9 0
● AMPLIFIERS		
Armstrong Mark II and Pre-Amp.....	£32	0 0
Dulci DPA10 and Control Unit.....	£15	15 0
Dulci DPA10 and Pre-Amp.....	£19	19 0
E.A.R. Triple Pour.....	£11	11 0
Leak TL12 Plus and "Point One" Pre-Amp.....	£31	10 0
Leak TL12 Plus and "Varslope" Mark III.....	£34	13 0
Quad Mark II and Pre-Amp.....	£42	0 0
Rogers "Cadet" and Control Unit.....	£17	10 0
Rogers "Junior" and Mark II Unit.....	£28	0 0
● STEREO AMPLIFIERS		
Avantic SP111 combined amp and pre-amp.....	£29	8 0
Dulci "Stereo 2" Pre-Amp with SP44 twin power Amplifier.....	£22	1 0
Dulci Stereo Eight Pre-Amp Unit with two DPA10 Amplifiers.....	£48	6 0
Leak Stereo 20 Amp with Point One Stereo Pre-Amp.....	£51	9 0
Panphonic Stereo 3000.....	£31	10 0
Quad 22 Control Unit with two Mark II Amps.....	£70	0 0
Rogers HG88 Integrated Stereo Amplifier In Case.....	£40	0 0
Rogers Stereo Pre-Amp with two "Junior" Amplifiers.....	£53	10 0
All amps and pre-amps available separately.		
● TUNERS		
Acoustical "Quad" F.M.....	£28	17 6
Armstrong ST3 AM/FM.....	£27	6 0
Dulci FMT/2 (Self-Powered).....	£19	17 6
Dulci F.M. (Self-Powered).....	£16	9 6
Dulci H4T/2 AM/FM (Self-Powered).....	£23	19 8
Jason "Prefect".....	£13	5 6
Jason J.T.V. Tuner.....	£25	7 3
Leak Trough-line F.M. (Self-Powered).....	£33	15 0
Rogers F.M. (Self-Powered).....	£24	10 3
Rogers Switched F.M. Unit.....	£15	1 10
● SPEAKER AND EQUIPMENT CABINETS		
W.B. Prelude Reflex Speaker Cabinet.....	£11	11 0
W.B. Prelude Reflex Corner Cabinet.....	£10	10 0
W.B. Prelude Hi-Fi Console.....	£13	13 0
W.B. Column Cabinet.....	£18	18 0
Wharfedale Column "8" Cabinet.....	£21	15 0

Hours: Monday to Saturday 9—6 p.m.
(Thursdays 1 p.m.)

**NORTH LONDON'S
HI-FI
CENTRE**

A selection from our extensive stock available for immediate delivery

**MAIL ORDER
SPECIALISTS**

**GOODS DESPATCHED BY
RETURN**

CARRIAGE FREE! PACKING FREE!

INSURED FREE! (U.K. & B.F.O.)

OVERSEAS ORDERS SENT FREE OF PURCHASE TAX AND SHIPPED PROMPTLY AT MINIMUM COST

● Customers selected equipment expertly assembled at moderate cost.

WE EXPORT TO U.S.A. & CANADA

INSURED & CARR. PAID

Decca Stereo Pick-up with Arm type FFSS

\$46.35 (£16.9.6)

Special quotations for other countries

**C.C. GOODWIN
(SALES) LTD**

● MOTORS		
B.S.R. UA12.....	£13	2 3
Collaro 4TR200 Motor only.....	£13	18 3
Collaro 4T200 with Tx88 Pickup.....	£18	18 0
Connoisseur Type B.....	£27	16 1
Garrard 301.....	£22	7 3
Garrard 301 with Strobe.....	£23	18 4
Garrard 4HF/GC8(H).....	£18	9 9
Garrard RC88.....	£16	8 0
Garrard RC88.....	£18	12 8
Garrard 4HF/GC810 Stereo.....	£19	8 4
Garrard TA AC/DO 3-speed Motor and Pickup.....	£20	9 1
Garrard TA/Mk. II.....	£8	10 0
Lenco GL60 (Cartridge extra).....	£27	12 6
Lenco GL65.....	£15	18 0
Lenco GL68.....	£19	17 6
Lenco GL69.....	£23	13 0
Phillips AG2009.....	£10	10 0
Many also available in Cabinets.		
● LOUDSPEAKERS		
B.J. "Top C" Tweeter.....	£5	0 0
E.A.R. Trio Speaker Console.....	£15	15 0
G.E.C. Metal Cone 8in.....	£8	16 5
G.E.C. Presence Unit.....	£3	19 6
Goodmans Azlette 8in.....	£8	12 2
Goodmans Audiom 60, 12in.....	£9	12 9
Goodmans Audiom 300, 12in.....	£11	5 9
Quad Electrostatic Speaker.....	£22	0 0
Rogers "1284" 3-way speaker system.....	£28	10 0
T.S.L. Tweeter LPH65.....	£1	17 8
W.B. Stentorian 8in. HF812.....	£3	19 6
W.B. Stentorian 8in. HF816.....	£6	10 6
W.B. Stentorian HF912.....	£4	4 0
W.B. Stentorian 10in. HF 1012.....	£4	15 0
W.B. Stentorian 10in. HF1016.....	£7	12 4
W.B. Tweeter T10.....	£4	4 0
Wharfedale 8/145.....	£8	19 11
Wharfedale Super 3.....	£8	13 3
Wharfedale Super 8FS/AL.....	£8	19 11
Wharfedale Bronze 10FSB.....	£5	6 0
Wharfedale Golden 10FSB.....	£8	7 3
Wharfedale Coaxial 12.....	£25	0 0
Wharfedale Baffle 3-speaker Unit.....	£39	10 0
● PICKUPS, STEREO AND MONAURAL by Acos, B.J., B.S.R., Collaro, Connoisseur, Decca, Garrard, Leak, Goldring, Philips, Ronette, Tannoy, including Cartridges and Stylis.		

"COMPARATOR" DEMONSTRATIONS

HIRE PURCHASE AVAILABLE

Callers note: We are 200 yards from Wood Green Underground Station.

7, THE BROADWAY, WOOD GREEN, LONDON, N.22 Tel.: **BOWes Park 0077/8**

**Bullers CERAMICS
FOR INDUSTRY**

High quality material and dimensional precision are attributes of Bullers die-pressed products. Prompt delivery at competitive prices.



We specialise in the manufacture of—

- PORCELAIN** for general insulation
- REFRACTORIES** for high-temperature insulation
- FREQUELEX** for high-frequency insulation
- PERMALEX & TEMPLEX** for capacitors




BULLERS LIMITED

MILTON · STOKE-ON-TRENT · STAFFS

Phone: Stoke-on-Trent 54321 (5 lines) · Telegrams & Cables: Bullers, Stoke-on-Trent

Ironworks: TIPTON, STAFFS London Office: 6 LAURENCE POUNTNEY HILL, E.C.4

Phone: Tipton 1691 Phone: MANsion House 9971

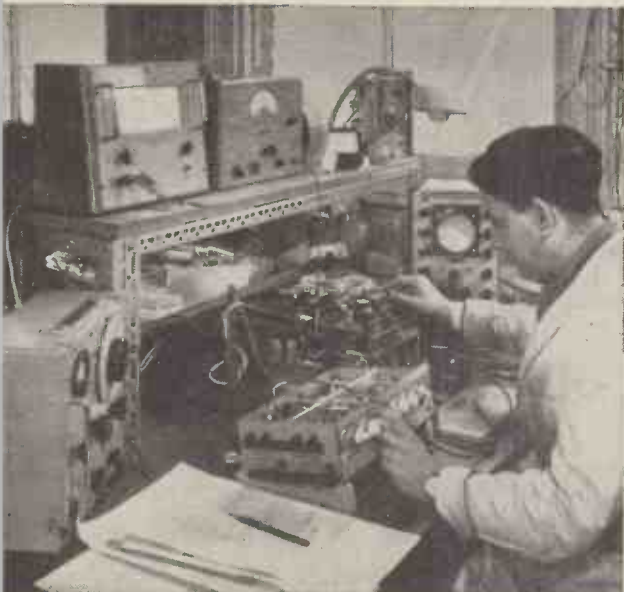


What's this
true depth
reproduction
business?




It's the nearest we can get to describing the difference DULCI equipment makes to your listening pleasure. We know it's true—but we don't expect you to believe us—trust the evidence of your ears. Have a chat with your local DULCI dealer and hear DULCI in action for yourself. He has been carefully chosen because he, too, is an enthusiast who knows your problems—and can help you solve them. Ask him about the price at the same time—we're not giving them away but you won't get better equipment for the price anywhere. You see, we started DULCI PRODUCTS in the belief that there were people—you, perhaps—who can't afford to pay the earth for sound reproduction equipment, yet are too knowledgeable to put up with second-rate stuff. How right we were! We try to take as much care over designing and making the equipment we sell to you, as we do over our own personal Hi-Fi and Stereo set—for we are lucky enough to be enthusiasts ourselves who take a genuine pride and pleasure in our job.

We are not going to insult your intelligence by trying to sell you individual units through this advertisement alone. These brief details of some of our lines, will, we hope, whet your appetite. If you are interested in one or more of these items, fill in the coupon. We will send you fuller details and the name of your nearest DULCI dealer.

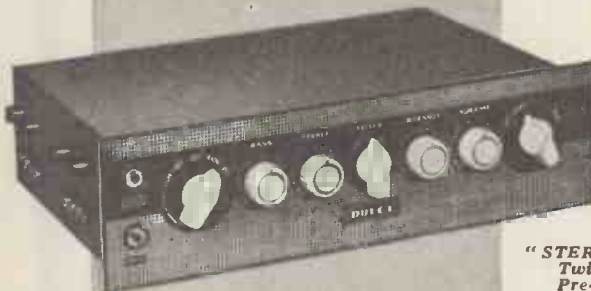

"STEREO EIGHT"
Twin Channel
Pre-amplifier

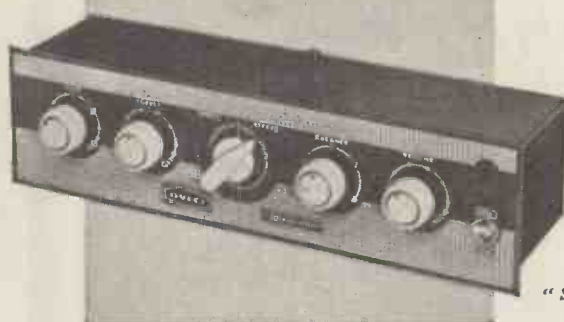

"STEREO TWO"
Twin Channel
Pre-amplifier



Write for illustrated Brochure

LEE PRODUCTS (GREAT BRITAIN) LTD.
Elpico House, Longford Street, London, N.W.1
Tel: EUSton 5754

Please send me fuller information on DULCI

MONO AMPLIFIERS TUNERS RADIOGRAM CHASSIS

STEREO TAPEUNITS

Name

Address

(BLOCK CAPITALS PLEASE—IT'S QUICKER !)

CITY SALE & EXCHANGE LTD

93-94 FLEET ST., LONDON, E.C.4

Phone: FLEet Street 9391-2

WE ARE SPECIALISTS IN THE BEST HI-FI EQUIPMENT

NEW EQUIPMENT

Quad 22 Stero Control	£25 0 0
Quad Main Amps	£22 10 0
Leak Point One Stereo	£21 0 0
Leak Stereo 20	£30 9 0
Audio Master Stereo	£35 15 0
Pilot Stereo amp. ...	£33 12 0
Wharfedale 12in. coax spk.	£25 0 0
Reflectograph T/Recorder	£98 14 0
Tanberg stereo T/Recorder	£119 14 0

SHOP SOILED and SECONDHAND ITEMS

Rogers Stereo Pre-Amp. and Two Cadet Amplifiers	£30 0 0
Pye Mozart Amp., fitted to Lowboy ...	£49 10 0
Pye 5/8 Amp.	£22 10 0
Pye Spk. Walnut Cabinet.....	£15 0 0
Sandfilled Corner Baffle for 10in. unit	£7 10 0
Quad FM Tuner.....	£19 19 0
9 Wave Band Tuner, Bass and Treble controls	£12 10 0
Rogers Stereo Control	£17 10 0
Reflectograph 500 s/soiled Tape Recorder	£75 0 0

All Records and Tapes supplied. Postal Orders by return. Stylus, Sapphire or Diamonds. Books on tape recorders. Sound equipment available. Microphones for all purposes and recorders.

**H.P. TERMS ARRANGED
PART EXCHANGE A SPECIALITY**

To CITY SALE & EXCHANGE LTD., 93-94 Fleet St., E.C.4
Please send complimentary copy of your Stereo Catalogue.
Name.....
Address.....

*4 girls now
do work of 5*

New techniques demand new tools. Transistors, printed circuits, sub-miniature components can now be soldered more accurately, with much less effort, without risk of damage to adjacent components with the feather-weight pencil-thin Oryx. Available in seven models for continuous working up to 470°C. Widely used by instrument makers, electronic equipment makers throughout the world. It will pay you to give the Oryx an extended trial on your own production lines.

**For QUICKER ...
BETTER Joints
at less cost!**

ORYX



from
25/-
subject

EXCLUSIVE ORYX FEATURES

- ★ Low voltage (6-24 v.) absolutely safe, therefore ideal for female operatives.
- ★ Heats up in 35 seconds—cannot overheat during extended use
- ★ Uses renewable, interchangeable, corrosion-resistant bits
- ★ Patented heating element has no ceramic spacers or mica insulators
- ★ Ideal for battery-operated mobile service on cars, trucks, aircraft
- ★ Efficiency equal to mains-operated 80-watt iron at fraction of weight and size
- ★ Fully guaranteed against breakdown for twelve months

Write now for illustrated Folder and Price List

ORYX ELECTRICAL LABORATORIES LTD.,
DOMINION ROAD, WORTHING, SUSSEX. Tel.: WORTHING 9895



1 Mc/s Decade Tube

TROCHOTRON ET51

Counting speeds of 1 Mc/s and above, and a current output of 5.5 mA this is the performance of the new Mullard ET51.

The ET51 is a trochotron decade stepping tube which may be used as a counter or selector. It has a comparatively large output which is sufficient to drive a direct read-out number tube or a decade point indicator tube.

The high speed capabilities of this tube are of particular use in nucleonic scalers, decimal computing equipment and electronic switching circuits. In these and similar applications, the ET51 with its relatively simple circuitry can effect considerable economies compared with more conventional methods.



The ET51 may be used as a direct replacement for the American 6700. It is fully available and you are invited to write on your company notepaper for data on this and other Mullard counting tubes.

Mullard

GOVERNMENT AND
INDUSTRIAL VALVE DIVISION


MULLARD LIMITED • MULLARD HOUSE
TORRINGTON PLACE • LONDON • W.C.1
TELEPHONE: LANGHAM 6633



MVT 365B

THE WORD **MAXI-Q** IS THE REGISTERED
TRADE MARK
OF **DENCO (CLACTON) LIMITED**
IT IS ALSO A GUARANTEE OF
WORKMANSHIP & TECHNICAL PERFORMANCE

OUR RANGE OF PRODUCTS IS SO GREAT THAT WE NOW HAVE TO REQUEST THE AMOUNT OF 1/4d. FOR OUR GENERAL CATALOGUE AND TO SAVE YOU POSTAL ORDER POUNDAGE CHARGE WE REQUEST SEND 1/4d. IN STAMPS.

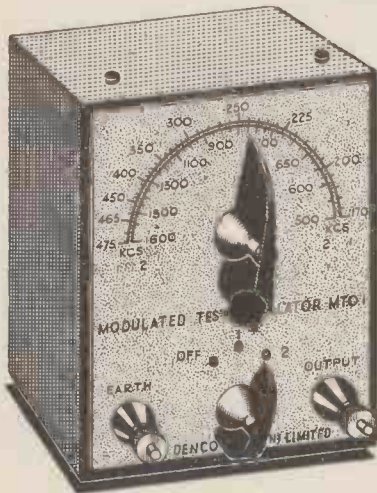

MODULATED TEST OSCILLATOR MT0.1

- ★ Provides a modulated signal suitable for I.F. alignment also trimming and tracking R.F. circuits.
- ★ Frequency is continuously variable from 170-475 kc/s and 550-1,600 kc/s.
- ★ Suitable for the alignment of transistor receivers.
- ★ Operates from a single 9-volt grid bias battery (not supplied) which is housed within the unit.
- ★ The case is manufactured from steel and is finished in silver hammer. The front panel is gloss black bearing white lettering. Dimensions are $5\frac{1}{16} \times 4\frac{1}{16} \times 3$ in.
- ★ Supplied with full operating instructions.

PRICE £3/15/-

PLEASE SEND S.A.E. WITH ALL ENQUIRIES

DENCO (CLACTON) LTD.

(DEPT. W.W.)

357/9 OLD ROAD, CLACTON-ON-SEA, ESSEX

*Reduce
with the*

your press tool costs

HUNTON

UNIVERSAL BOLSTER OUTFIT

In addition to the range of Punches and Dies $\frac{1}{8}$ in. to $3\frac{3}{4}$ in. dia. available from stock, some of the tools usually required in the Radio and Electronic Industries have been standardised for use with the Hunton Universal Bolster Outfit. Illustrated here are a few which can be supplied quickly or from stock.

In London and Home Counties, ask for a practical demonstration in your own works.

Write for illustrated brochure W.W.1

HUNTON LTD.

Phoenix Works,

114-116, Euston Road, London, N.W.1

Telephone:
EUSon 1477 (3 lines)

Telegrams:
Untonexh, London

MAIN DISTRIBUTORS FOR LANCASHIRE,
YORKSHIRE AND CHESHIRE

JAS. H. VICKERY & CO. LTD.
21 Bradshaw Street, Manchester, 4

Telephone: Blackfriars 3221. Telegrams: Vickery, Manchester



Tough &

Tiny!

Plessey

"MP"
Miniature Preset

Potentiometers

General Specification

Standard resistance values
1 kΩ 2.2 MΩ (in preferred values)

Tolerance ± 20%

Law Linear

Rating (total track) ¼ watt at 55° C
(subject to max. voltage not being exceeded)

Maximum voltage 500 V

Terminal resistance 50 Ω max.

Total rotation 290° min.

Max. resistance change
due to loading, humidity, etc. 10%

*The specification of the Red Spot 'MP' is as above except in the following three particulars:

Rating (total track): ¼ watt at 70° C.
Max. voltage: 750 V.
Terminal resistance: 10 Ω max.

The critical selection of all the materials used in construction together with scrupulous process control results in a robust and highly welcome addition to the wide range of high quality components made available to engineers by Plessey.

For full details send now for leaflet 171.



The Plessey Miniature Preset Potentiometers are rugged controls with moulded carbon tracks—and they are, in fact, the smallest available today.

Eminently suitable for all applications where space is at a premium, these sturdy components are easily mounted on insulated panels and can be arranged in groups of four or more as required for television preset panels.

Two forms are at present available: one, having a minimum of height from the mounting panel, is designed for screwdriver adjustment by engineers or servicemen, while the second has a knob for finger or screwdriver operation by the listener or viewer. Securing is by means of a 6BA nut.

For more stringent applications in the field of electronic instruments, a further development of this fine component is now available and is known as the Red Spot 'MP'.*

Plessey

THE PLESSEY COMPANY LIMITED
CAPACITORS AND RESISTORS DIVISION
KEMBREY STREET · SWINDON · TEL. SWINDON 6211

Overseas Sales Organisation:
Plessey International Limited, Ilford, Essex · Tel: Ilford 3040

*There's nothing so good as building it
with a*

Jason *kit*



AUDIO-GENERATOR AG.10

Jason offer a number of test-equipment designs in Kit form or ready built including Audio-Attenuator, Wobbulator, Oscilloscope, Crystal Calibrator, Stabilised Power Pack.

All are designed to high standards of efficiency. Details gladly sent on request.

Capacity-tuned Wien Bridge gives excellent stability with low distortion. Output held constant over entire band. Model AG.10 covers from 10 to 100,000 c/s in four ranges. A maximum of 10V is available from cathode follower output stage. The attenuator gives a minimum calibrated output of 100 microvolts. Square wave output with an excellent rise-time makes the Instrument valuable for checking all audio equipment. Output, level within 1dB over whole range, available as sine or square wave as required. Square wave rise-time less than 2 micro-seconds at all frequencies.

This instrument is designed in conformity with other test instruments in the Jasonkit range, and is complete with case.

Kit complete with building and operating manual

£12 - 10 - 0

Kit built and ready for use
£15.2.6

● ALSO AVAILABLE—AUDIO AND TUNER KIT DESIGNS

BRITISH DESIGNED TO HIGH TECHNICAL STANDARDS

THE JASON MOTOR & ELECTRONIC CO., 3-4 (D) GT. CHAPEL ST., OXFORD ST., LONDON, W.1

GER 0273/4

**foremost for Quality,
Performance and
Reliability—**

PIW Dia. $2\frac{1}{4}$ "
20 Watt Max.
Range
1-500,000 ohms.
Data Sheet No.5

TW Dia. $1\frac{1}{4}$ "
5 Watt Max.
Range
1-100,000 ohms.
Data Sheet No.2

TT Dia. $1\frac{1}{4}$ "
5 Watt Max.
Range
1-100,000 ohms.
Data Sheet No.8

TS Dia. $1\frac{1}{8}$ "
2 Watt Max.
Range
5-50,000 ohms.
Data Sheet No.7

MW Dia. $\frac{3}{8}$ "
1 Watt Max.
Range
5-50,000 ohms.
Data Sheet No.1

RELIANCE
↑
POTENTIOMETERS

The name "Reliance," aptly chosen more than thirty years ago, is recognised for potentiometers of consistent accuracy, with a record of long-life reliability. The standard range—the most comprehensive available—covers from 1 to 500,000 ohms and includes linear, log, semi-log and non-inductive types, and, depending on characteristics, ratings up to 20 watts. GANGED MODELS available of TT, TW, PIW and TS on common spindle. Fully tropical and concentric spindles type TW only.

RELIANCE MANUFACTURING Co. (SOUTHWARK) Ltd., SUTHERLAND Rd. HIGHAM HILL, WALTHAMSTOW, LONDON, E. 17

GD 10

Telephone No. (and Cables) : LARKSWOOD 1118



4LP1

the only **P.D.A.**
tube with
TWO traces
from **ONE** gun

The new 'Etel' four-inch instrument tube 4LP1 is the most economical high performance tube for dual trace oscillography.

Two traces are provided in the simplest and most economical manner—by means of a single gun with a beam dividing electrode. Sensitivity of 27 V/cm at 3kV is obtained by employing a post deflection accelerator. The 4LP1 is recommended for high quality general purpose applications. It has a flat face and side connections to the deflector plates. Write for full information to the address below.

ABRIDGED DATA

4LP1 single gun dual trace tube.

SCREEN TYPE	P1
DEFLECTION	electrostatic
POST DEFLECTION ACCELERATOR	single stage
SCREEN DIAMETER	4 inches
MAXIMUM OVERALL LENGTH	15½ inches

Capacitances

$C_{x'-x''}$...	1.4 to 2.0 pF
$C_{x'-all}$ (x'' earthed)	...	2.7 to 3.8 pF
$C_{x''-all}$ (x' earthed)	...	2.7 to 3.8 pF
$C_{y'-all}$...	2.5 to 3.8 pF
$C_{y''-all}$...	2.5 to 3.8 pF
$C_{y'-y''}$...	<0.1 pF

Typical Operating Conditions

V_{a1}	...	1.5 kV
V_{a2}	...	320 to 420 V
V_{a3}	...	1.5 kV
V_{a4}	...	3.0 kV
V_g (for cut-off)	...	-40 to -95V
S_x	...	27 V/cm
$S_{y'}$...	27 V/cm
$S_{y''}$...	27 V/cm

Beam intermodulation is largely eliminated by the very low $C_{y'-y''}$ capacity.



REGD. TRADE MARK

CATHODE RAY TUBES

Arcoelectric


SWITCHES & SIGNAL LAMPS

T.225: Miniature Slide Switch
Ideal T.V. mains switch

S.L.166: Very small low cost
mains neon indicator

T.280: Sensitive Snap Action Switch
Popular switch for tape recorders

T.626: Double pole 3-AMP switch
with tags to fit printed circuit boards

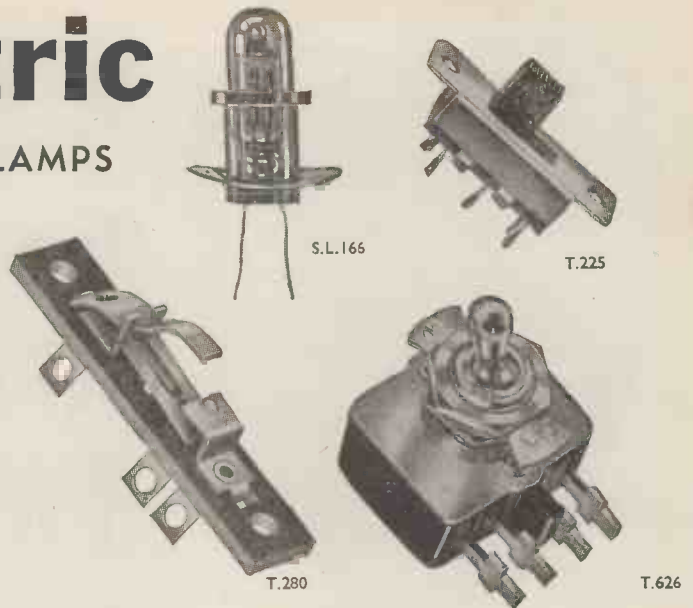

Write for Catalogue No. 132

ARCOLECTRIC
SWITCHES · LTD

CENTRAL AVENUE, WEST MOLESEY, SURREY. Tel.: MOLESEY 4336

Wide range and variety of CERAMIC TRIMMERS

High stability in most exacting conditions.

Are being increasingly incorporated in electronic equipment owing to their VERY COMPETITIVE prices, HIGH QUALITY and RELIABILITY.


Samples and Catalogues available on request.

STEATITE INSULATIONS LTD.

31, George Street, Lozells,
Birmingham 19.

Telephone: NORthern 8357/8.

Telegraphic address: "Steatite-B'ham, 19".

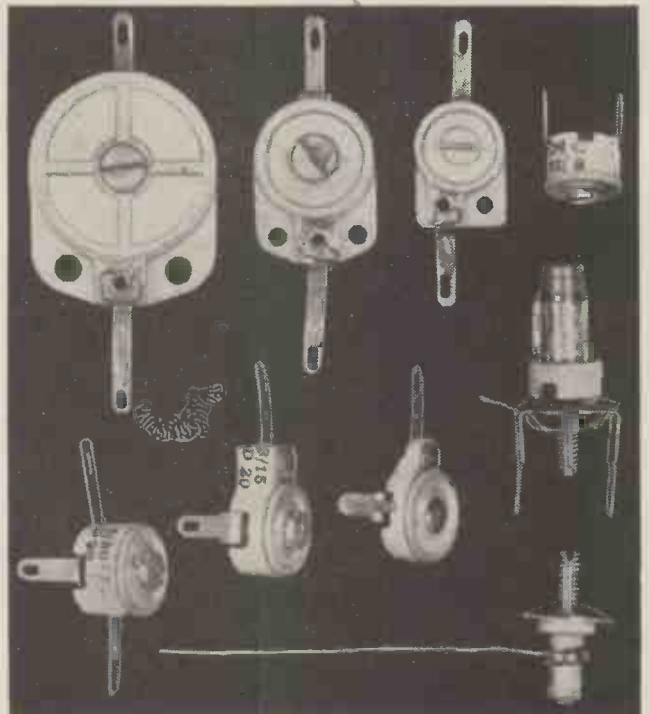

MOBILE R/T

- * Easily transported — quickly installed.
- * Choice of built-in power supply units for 12 V or 24 V battery, or a.c. mains.
- * Eight Crystal transmitter frequencies with pre-set tuning.
- * Speech, key and loud-hailer facilities.

—using the
GNE 510
 HIGH FREQUENCY
 TRANSMITTER
 -RECEIVER

Easily transported, quickly installed, this economical 40 watt HF Transmitter/Receiver is designed especially for medium distance communication, either from land or marine mobile stations or between fixed stations. Particular care has been taken to minimise power consumption when operating from either 12 V or 24 V battery supply. Using a 12 ft. to 16 ft. whip aerial, ranges of 500 miles, between vehicle and base, or 700 miles with elevated aerials are being achieved under practical operating conditions.

The frequency range is 1.5 Mc/s to 12.5 Mc/s and facilities are provided for speech, telegraphy (m.c.w. and c.w.) and public address.

Eight crystal transmitter frequencies with pre-set tuning, interchangeable power supply units for mains, 12 V and 24 V batteries make this compact equipment a most reliable and effective means of communication in a wide variety of applications, particularly suitable for tropical use.

Write for descriptive literature

A PRODUCT OF

MULLARD EQUIPMENT LIMITED

A COMPANY OF THE MULLARD GROUP

Mullard House

Torrington Place · London · W.C.1 · Telephone: Langham 6633



LINEAR

MODEL L10 HIGH FIDELITY 10 WATT AMPLIFIER

WITH SEPARATE PRE-AMPLIFIER

Supplied complete only (i.e. Main Amplifier and Pre-amp.)

15 Retail Price GNS.

Size of main amplifier 9in. x 7in. x 5in., Pre-amp. 11in. x 4½in. x 2½in. Front-Plate 12in. x 3½in. Stoved Gold hammered finished chassis. Front Plate Polychromatic Gold. Weight of main amplifier 10lb. Pre-amp. 3lb. For 50/50 c.p.s. A.C. mains 200-230-250 v. c.p. to order for export.

The Following Outstanding Test Figures include Pre-amplifier.

Sensitivity (for 10 watts)
L.P. 25 m.v.
78 r.p.m. 20 m.v.
Radio, 35 m.v.
Microphone, 2.5 m.v.

Input Impedance
All inputs 500k. Plus 10pfd


Frequency Response
± 2 d.b. 30—25,000 c.p.s.

Power Consumption
90 watts.

Maximum Power Output
In excess of 12 watts.

Negative Feedback
Total 32 d.b.

TRADE AND EXPORT ENQUIRIES TO:

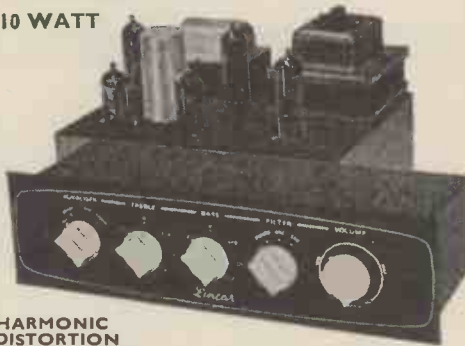

HARMONIC DISTORTION
(Inc. Pre-amplifier)
0.09% measured at 10 watts.

Damping Factor 35
Bass Control
+9 d.b. to -9 d.b. at 50 c.p.s.

Treble Control
+9 d.b. to -9 d.b. at 12,000 c.p.s.

Hum Level
-70 d.b.
Filter
-7 d.b. at 9 Kc/s.
-10 d.b. at 5 Kc/s.

MULLARD VALVES:
EF86(1); ECC83(2); EL84(2), E281(1).

OUTPUT MATCHING:
For 3 ohm and 15 ohm L/5speakers from high grade sectionally wound output transformer

RESERVE POWER SUPPLY (for Radio Tuner) 300 v 30 m.a. smoothed and 6.3 v 1.5 a. at 4-pin socket.

The L45. A compact High Quality 4-5 watt amplifier

Size approx. 7-5½in. high. Sensitivity is 28 millivolts so that the input socket can be used for either microphone or gram, tape, radio tuner etc. B.V.A. valves used are ECC83, EL84, EZ80 Controls are: Vol. Treble and Bass with mains switch. The Tone controls provide full compensation for long playing records. Output matching for 3 ohm loudspeaker. Retail price £5/19/6. **THE LT45 TAPE DECK AMPLIFIER.** A complete unit (power pack and oscillator incorporated) ready for connection to A.C. mains. 3 ohm loudspeaker and practically any make of deck. Negative feedback equalization adjustment by multi-position switch for 3½, 7½ and 15in. per sec. Retail price 12 gns.

DIATONIC 10-14 WATT High Fidelity amplifier with in-gral pre-amplifier. Retail 12 gns.

CONCHORD 30 WATT. Hi-Fi amplifier with two separately controlled inputs. Retail 15 gns.

L50 50 WATT AMPLIFIER. Size approx. 13 x 9 x 7in. Sensitivity 25 m.v. Outputs for 3 and 15 ohm speakers. Retail price 19 gns.


L3/3 STEREPHONIC AMPLIFIER. Sensitivity 150 m.v. Output 3 watts on each channel. Retail 7 gns.

LINEAR PRODUCTS LTD.

ELECTRON WORKS, ARMLEY, LEEDS

Tel.: Leeds 63-2125 (3 lines)

A new development in relays

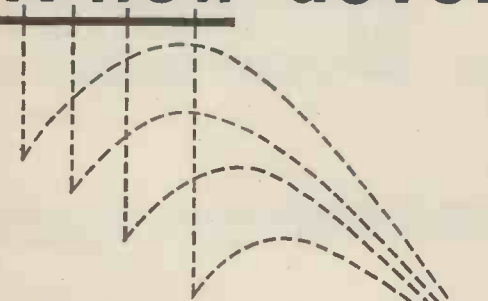


SERIES 700

This is a new heavy duty industrial version of the well tried and proven P.O. type 3000 relay, renowned for its reliability, using the identical magnetic circuit as the type 3000 but offering up to 8 sets of contacts of either makes, breaks or change-overs at 250v A.C. up to 15 amps.

All moving insulators are of P.T.F.E. Contact pressures have been increased in order to withstand severe shock and vibration conditions as encountered in many industrial applications. Coils wound from ½Ω to 100,000Ω and slugged if required. Flash test 2,500 volts between contacts coil and frame. Various contact materials to specification—full tropical finish. A rugged relay designed for faultless operation and long life far in excess of its type 3000 predecessor.

Prototypes within 24 hours. Quantity deliveries commencing 14-21 days. **NOW IN PRODUCTION.**

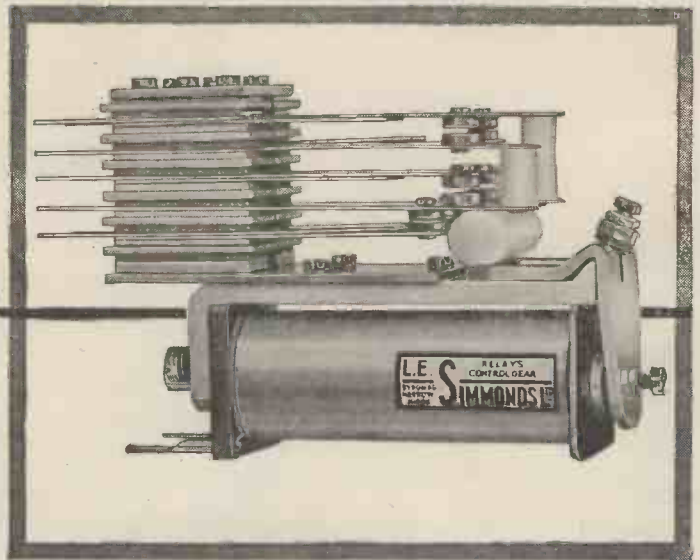


POST OFFICE TYPES

Manufacturers of P.O. types 3000 and 600 relays to specification. Approved by the Admiralty Post Office and U.K.A.E.A. All relays guaranteed made in our own works.

SIMMONDS

Manufacturers to H.M. Government Departments and leading Contractors

L. E. SIMMONDS LTD., 5 BYRON ROAD, HARROW, MIDDX. TEL: HARROW 7797/9. TELEGRAMS: SIMRELAY HARROW

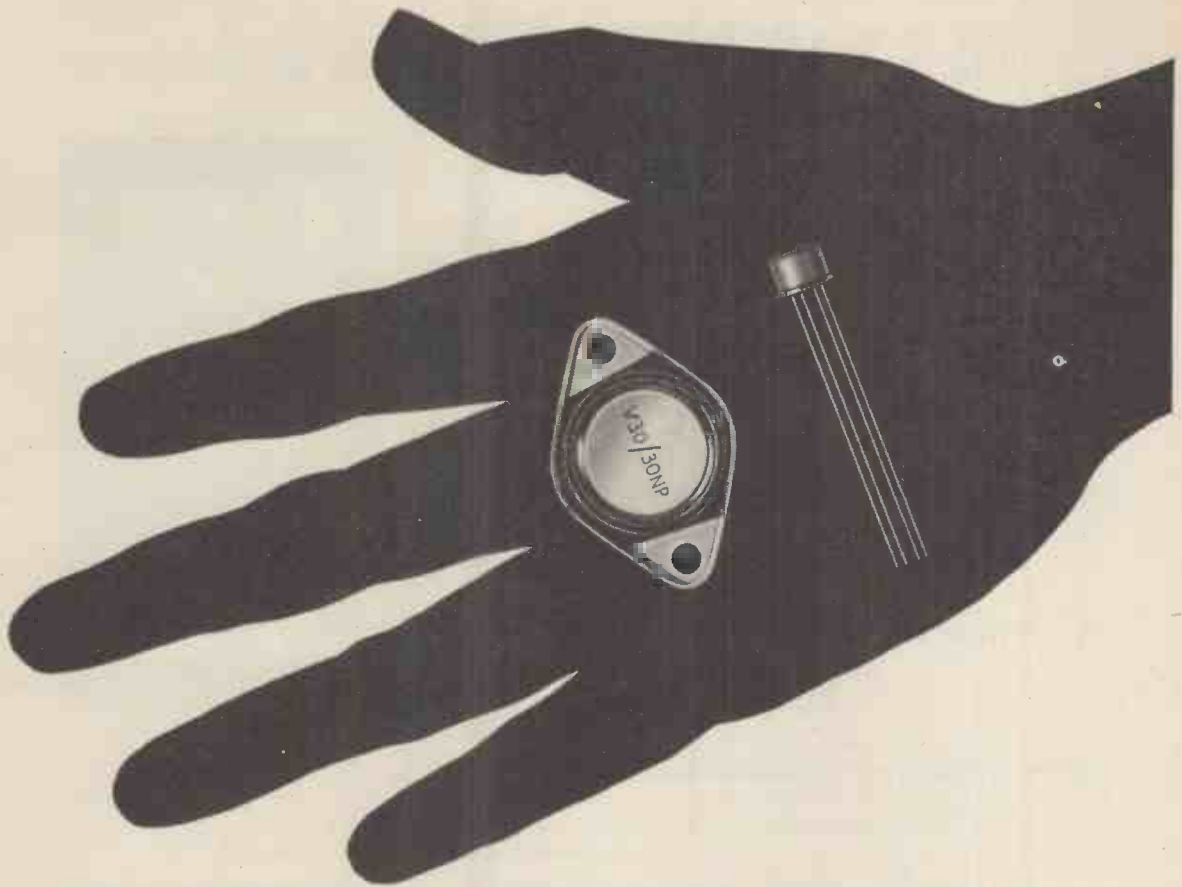

Which of these could solve your problem?

Newmarket Transistors Limited have added the following transistors to their range:

The new Noodle Transistor

(V15/15NP V15/30NP V30/15NP V30/30NP)

1. Amplifies at 10 amps.
2. American diamond construction interchangeability.
3. No fixing screw problems.
4. Cold welded case for increased reliability.
5. Higher frequency operation.

VHF Drift Transistor (V15/20R)

1. Oscillates up to 100 Mc/s.
2. Amplifies up to 20 Mc/s.
3. Jedec 30 case.
4. Higher operating voltage.

**NEWMARKET
TRANSISTORS**

Fast Switching Transistors

(V10/1S V10/2S)

1. Phenomenal peak current performance—will switch 1 amp. peak.
2. Fifty Milli-microseconds risetime.
3. 20V collector rating.
4. British standard cylindrical construction.
5. Cold welded case for increased reliability.




Ask for copy of our booklet
"Semiconductor Device Data"
if you do not already have one.

Newmarket Transistors Limited

Exning Road, Newmarket, Suffolk.

Tel: Newmarket 3381/4 Cables: Semicon Newmarket.

ARDENTE *make a wide range of*

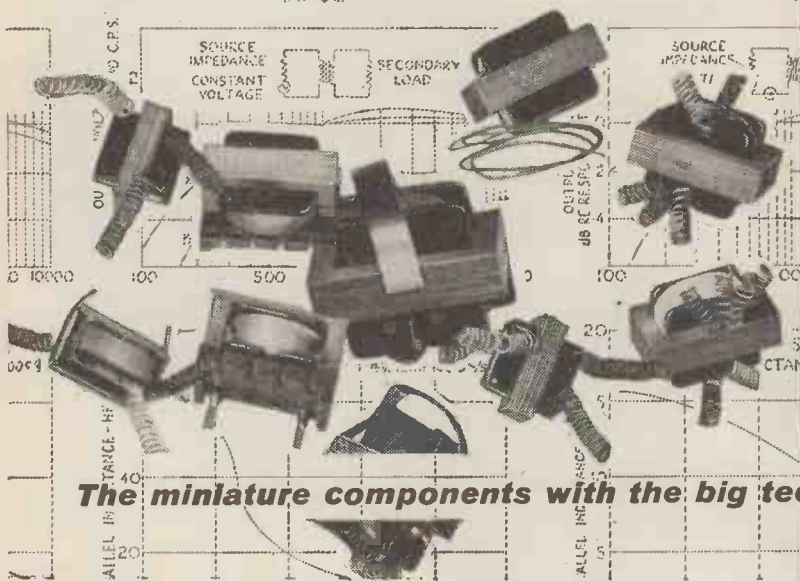

**MINIATURE
TRANSFORMERS
AND ELECTRONIC
COMPONENTS**

The miniture components with the big technical background

Sole Manufacturers and Exporters:

ARDENTE ACOUSTIC LABORATORIES LTD.

8-12 MINERVA ROAD, NORTH ACTON, LONDON, NW10 Telephone: ELGar 3923

Suppliers of components and hearing aids to the Government and manufacturers all over the world

RADIO · TELEVISION · TRANSMITTING & INDUSTRIAL TUBES



ALL TUBES OF BEST BRITISH AND CONTINENTAL CURRENT PRODUCTION, BRANDED AND BOXED "WALRAD"

LEADING BRITISH MANUFACTURERS' PRODUCTION ALSO AVAILABLE WITH THEIR OWN BRAND & BOXES

**LOWEST
PRICES**

ALSO IN STOCK
LARGE RANGE OF
AMERICAN TYPES

**HIGHEST
QUALITY**

WALMORE ELECTRONICS LTD.


PHOENIX HOUSE · 19-23 OXFORD STREET · LONDON · W.1

Telephone :
GERard 0522-3

Cables :
VALVEXPOR-LONDON

Telex :
LONDON 28752

A TWO-FACED CIRCUIT!

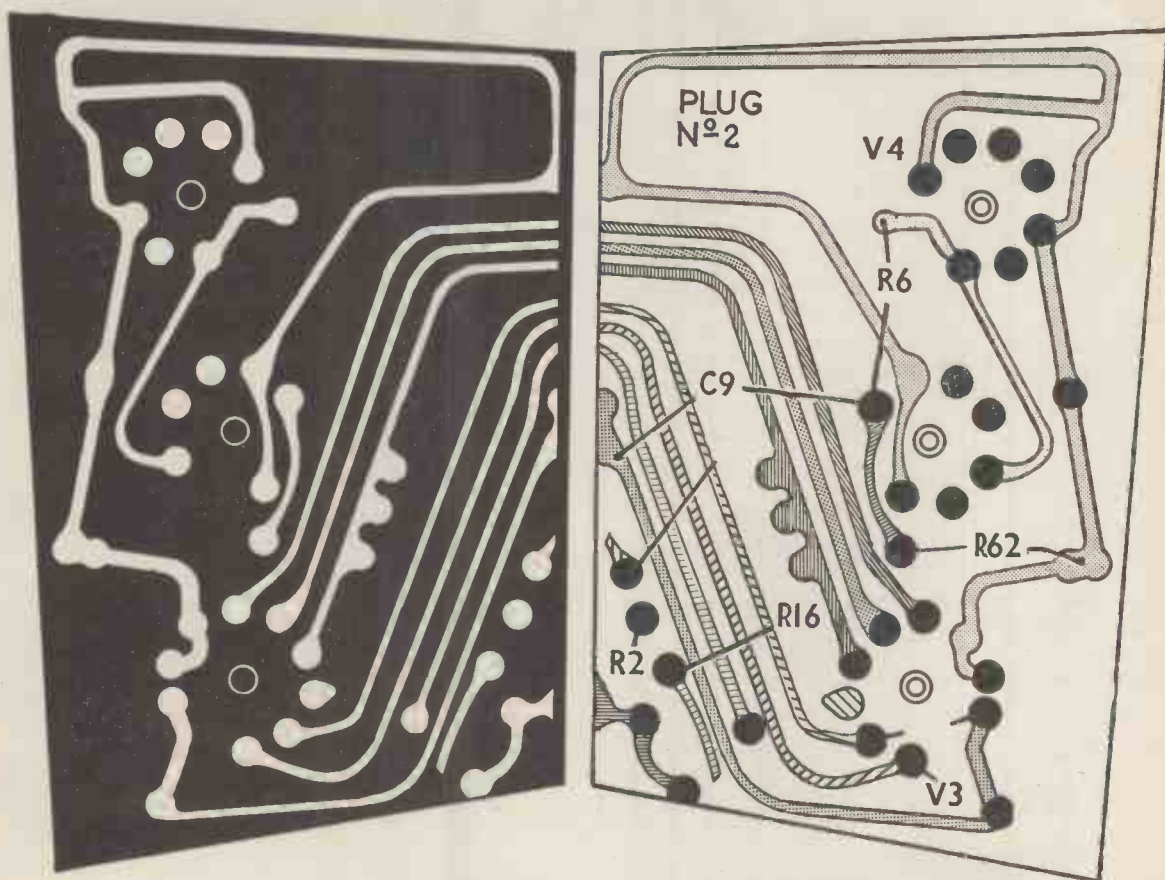

is a service man's dream

And we've made it come true. Mills & Rockleys' technical skill and eye to progress will continually supply their clients with all the best and newest ideas on printed circuits: and our two-faced circuit (patent applied for) is just one very good example.

Not only the component numbers but the actual circuit is printed, in colour code if necessary, on to the upper surface of the panel, reducing circuit tracing to child's play.

The completion of new plant in Coventry, incorporating the most advanced techniques and up-to-date facilities—including automatic temperature and humidity control—enables any requirement however complex to be met efficiently and economically.

DESIGN · CONSULTATION · PROTOTYPES · MASS PRODUCTION

WRITE TO:



MILLS & ROCKLEYS (PRODUCTION) LIMITED

PRINTED CIRCUITS DIVISION · SWAN LANE · COVENTRY TELEPHONE: 41327

LONDON'S LEADING STOCKISTS OF EQUIPMENT • ACCESSORIES • MATERIALS

GOODS SENT TO ALL PARTS OF THE WORLD

HI - FIDELITY STOCKISTS

including equipment by

- ACOUSTICAL • ARMSTRONG •
- AVANTIC • CHAPMAN • COLLARO •
- GARRARD • GOODMAN'S • JASON •
- LEAK • LENCO • PILOT • ROGERS
- W.B. • WESTREX • WRIGHT AND
- WEAIRE • WHARFEDALE.

LARGE STOCKISTS OF COMPONENTS & EQUIPMENT

by well known Manufacturers including:—

- A.B. METAL PRODUCTS • AVO •
- BELLING LEE • BULGIN • COLVERN
- DUBILIER • ERIE • MORGANITE •
- MULLARD • PAINTON • T.C.C.
- WELWYN • WESTINGHOUSE.

The Connoisseur's Tape Pre-Amplifier. MASTERLINK TAPE UNIT M2A

Build your own Hi-Fidelity Tape Equipment using this exclusive product of Tele-Radio (1943) Ltd., suitable for use with Wearite, Brenell & Collaro Decks. C.C.I.R. characteristic. Complete with external Power Pack. Full wiring instructions with each unit. Please advise type of deck when ordering. 27 gns. plus P. & P. 4/-. Free Leaflet on request.

Immediate despatch of goods available from stock. Carriage charged extra at cost.



"ALFA" TEST METER OFFER

6/12/60/300/1,200 v. A.C., ditto D.C., 0-20k, 0-2 megohm, 300 microA, 30mA, 300 mA - 20 to

+23dB, +20 to +37dB. Accuracy ± 3% D.C. ± 4% A.C. Multi-range. 5 1/2 in x 3 3/4 in x 1 1/2 in. Large clear dial, Leads £6/19/6. (P. & P. 2/-).

66 Page Catalogue Listing over 800 items of our extensive stocks. 1/- plus. P. & P. 6d.

ROTARY WAFER SWITCHES

A.B. Metal and N.S.F. Made to order. Price List free on request.

STEEL METER CASES

	Each
4 x 4 x 4in. Sloping Front	9 5
5 x 5 x 8in. Sloping Front	14 11
6 x 6 x 12in. Sloping Front	24 9
4 x 4 x 2 1/2in. Rectangular	6 8
6 x 4 x 3in. Rectangular	8 10
8 x 6 x 3in. Rectangular	11 0
10 x 6 x 2 1/2in. Rectangular	13 3
10 x 7 x 7in. with Alum. Panel	£1 4 9
12 x 7 x 7in. with Alum. Panel	£1 11 5
14 x 7 x 7in. with Alum. Panel	£1 15 9
14 x 9 x 8in. with Alum. Panel	£2 5 8
16 x 9 x 8in. with Alum. Panel	£2 9 6
16 x 11 x 8in. with Alum. Panel	£2 16 8
19 x 11 x 10in. with Alum. Panel	£3 3 10

ALSO FULL RANGE OF CHASSIS Chassis and Case List Free on request.

10 SPECIAL OFFERS!

1. Mains Transformer 550-0-550 v. 150 mA. 6 v. 3 A., 4 v. 3 A., 110 v. Primary £1.
2. Mains Transformer (Potted) 350-310-0-310-350 v. 220 mA. 6.7 v. 5 A., 6.3 v. 3 A., 6.3 v. 1 A., 5 v. 3 A., 6 v. 3 A., 6.3 v. 1 A., 230 v. Primary £2/10/-.
3. Mains and Output Transformers for Modern Version of Mullard 510. Shrouded of first class quality, £2/15/- per pair.
4. Mains Transformer. Weyrad Drop through, Shrouded. 250-0-250 v. 100 mA. 6.3 v. 3 1/2 A. Tapped Primary 200-240 v. 15/-.
5. Choke 10H 250 mA. Potted "C" Core, 25/-.
6. Choke 20H 50 mA. Potted, 15/-.
7. Choke 16H 120 mA. Potted "C" Core, 20/-.
8. Choke 5H 100 mA. Potted, 5/6.
9. Choke 5H 300 mA. Potted, 12/6.
10. Rectifier 300 v. 300 mA., 13/6.

TELE - RADIO (1943) LTD

189 EDGWARE ROAD, LONDON, W.2

Our only address • Few mins. from Marble Arch • Open all day Sat. Well-equipped demonstration room • Phone: PAD 4455/6

This is THE RAVEL—



DIMENSIONS : 37" wide; 19" deep; 17" high, plus 12" legs

PRICE 19 GUINEAS

Write today for full details, to Dept. WW910. If you can indicate your nearest main shopping centre, we shall be pleased to advise you of your local stockists

RECORD HOUSING

BROOK ROAD

LONDON, N.22

BOWES PARK 7487/8

a new multi-purpose hi-fi cabinet making a total of seven hi-fi cabinets all matching in style and finish.

Under the lid can be housed every kind of turntable, auto-change or transcription. The other half of the lid is fixed. Behind the left-hand door are mounted the pre-amp. controls and radio tuner, all concealed until required. On the right is the record storage compartment, ingeniously divided to take either 200 seven-inch records, or 100 twelve inch L.P.'s.

The
sound engineer
has the world
to choose from—




but he selects

Scotch magnetic tape

For highest quality reproduction, the B.B.C. and recording companies use 'scotch' brand.

WHY? Because 'scotch' brand magnetic tape gives the quality of reproduction the expert sound engineer needs and demands. The exclusive silicone 'dry lubrication' minimises wear on magnetic heads, and the tape keeps its high quality for years and years.

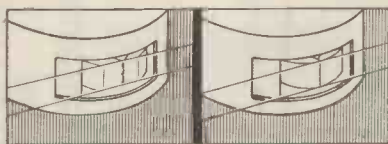

200 DOUBLE-PLAY

'scotch' brand 200 Double-Play tape is the latest addition to the wide range of magnetic tapes produced by 3M for the perfectionist.

It has a tensitized polyester base the thinness of which allows double the length on a standard spool. Pre-stretched tensitized polyester is extra strong.

WHENEVER YOU BUY TAPE BE SURE THAT YOU GET 'SCOTCH' BRAND

Ask for **Scotch** magnetic tape



MINNESOTA MINING & MANUFACTURING CO. LTD · 3M HOUSE · WIGMORE ST · LONDON W1 · AND AT BIRMINGHAM · MANCHESTER · GLASGOW
TBW/M.T.L.



Gaumont-Kalee Fluttermeter Type 1740

Watch that **WOW!** with the Gaumont-Kalee **FLUTTER METER**

Accurate measurement of sound equipment speed deviations

Small constant speed deviations of the lowest 'wow' components of sound recording or reproducing equipment are accurately measured and indicated by the Fluttermeter—down to zero frequency response. The Fluttermeter is equally suitable for use with machines employing photographic or magnetic sound tracks on film, tape, wire, or disc recording. The Gaumont-Kalee Fluttermeter type 1740 is an entirely new design. More compact, and lighter in weight, its cost is considerably less than all previous models.

Dimensions Height 10½" 26.04 cm.
Width 12¼" 31.12 cm. Depth 14¼" 36.47 cm.

Nett weight 29 lb. 13.15 Kilos

Brief Technical Data

- Operating carrier frequency...3,000 c.p.s. 15%
- Minimum Input signal.....50 mV R.M.S.
- Input Impedance.....1 Megohm
- Input amplifier bandwidth—3dB at 2,500 & 3,500 c.p.s.
- Effective limiter range.....110 dB
- Meter scaling—"Peak wow"...0 to +1% (centre zero)
- "Wow and Flutter"...0 to 1% R.M.S. and 0 to 2%
- Crossover frequency.....20 c.p.s.
- Flutter meter response.....—3 dB at crossover
—3 dB at 200 c.p.s.
- "Wow" meter response.....1 dB at 5 c.p.s.
- C.R.O. output frequency response.....level down to zero frequency
—3 dB at 200 c.p.s.
- 3,000 c.p.s. oscillator output level.....5V R.M.S. into .5 Megohm
100 mV R.M.S. into 500 ohms
- Accuracy.....Meter presentations +2% f.s.d.
- Power consumption.....35 watts
- Operation.....45 to 60 c.p.s.

FAMOUS USERS OF THE FLUTTERMETER


- B.B.C. Television and Research
- Compagnia Commerciale di Cinematografia, Milan
- Collaro Mullard
- Commission Supérieure Technique, Paris
- Commonwealth of Australia, Melbourne
- Dept. Posts and Telegraph, Dublin
- E.M.I. Research Laboratories
- Egyptian State Broadcasting
- Garrard Engineering and Manufacturing Co.Ltd.
- Ministry of Transport and Civil Aviation (U.K.)
- Magnavox Corporation of U.S.A.
- Ministry of Supply
- Marconi Wireless
- N.V. Philips' Gloeilampenfabrieken, Holland and Denmark
- N.Z. Broadcasting System
- Post Office Research Department
- R.C.A. Photophone Ltd.
- Southern Instruments Ltd.
- Truvox Ltd.
- Vortexion, Wright & Weaire Ltd. and in U.S.A., India, Poland, Hong Kong
- Westrex Co. Limited



RANK PRECISION INDUSTRIES LTD

G.B. -KALEE DIVISION STUDIO,
WOODGER ROAD, LONDON, W.12. ENGLAND

THE KOLECTRIC TYPE RH/1 HAND COIL WINDING MACHINE

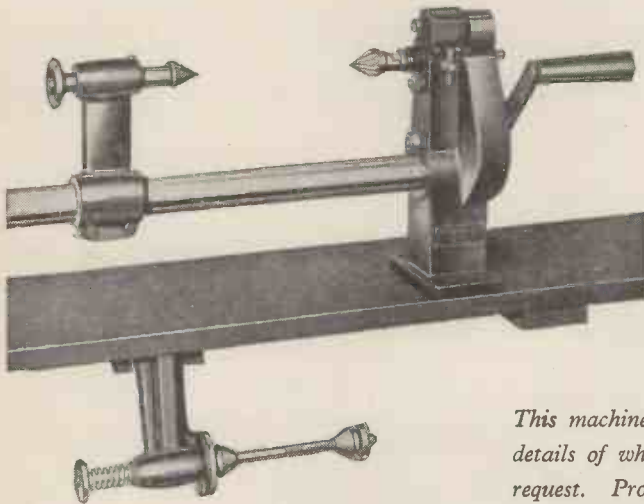


A substantially built Machine suitable for winding wire from 14 S.W.G. (0.080") upwards to the finer wire gauges. A sturdy detachable winding handle is provided and two winding ratios are provided: 1-1 and 4-1.

This machine possesses many outstanding features, full details of which, together with prices, are available on request. Prompt delivery.

KOLECTRIC LTD

73 UXBRIDGE ROAD, EALING, LONDON, W.5 Ealing 8322

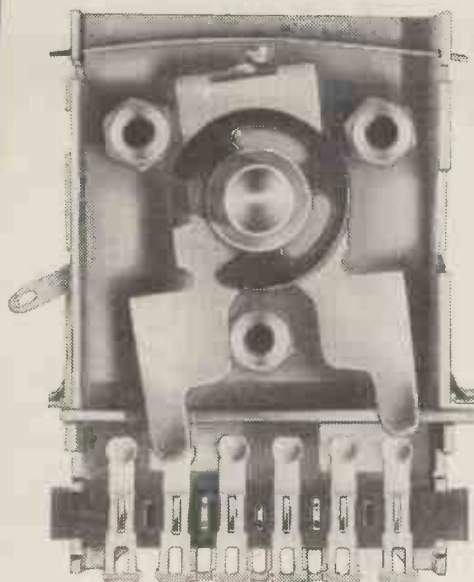

Patent Applied For

*take a
careful
look-*

it's the first you've ever seen

Yes, it's an 'S' Type variable capacitor—but with a difference! It provides full tuning over two complete wavebands—in one variable capacitor—with no separate switches—no messy linkages—and at minimum cost.

It incorporates an integral switch that permits wave change and tuning to be carried out with one control knob only on any two-band radio.

Available as 'S', 'W' or 'V' Types fitted with two-pole changeover switches but a third pole can be fitted for dial lamp switching or similar purposes. Also available with split-reduction gear.

Designers and engineers are invited to write for Publication No. 169.

A new break in Radio Receiver Design

Components Group
THE PLESSEY COMPANY LIMITED
New Lane · Havant · Hants
Telephone: Havant 1701

Overseas Sales Organisation:
Plessey International Limited · Ilford · Essex Telephone: Ilford 3040

Plessey

AUTOMAT

High-Stability
RECTIFIERS

TRANSFORMERS • D.C. EQUIPMENT

Specially designed to your requirements

SPEEDY DELIVERIES

Send now for your copy of Technical Bulletin 58/1

AUTOMAT

MOORSIDE

SWINTON

MANCHESTER

TEL · SWINTON 4242/4

Issued by Northworks Ltd.

M. R. SUPPLIES, LTD.

Universally recognised as suppliers of UP-TO-DATE MATERIAL which does the job properly. Instant delivery. Careful packing. Satisfaction assured. Prices nett. **SUPPLY METERS** (kilowatt hour). 200/250 v. 50 c. Usual 5-index dial reading from 1/100th unit. Loading 5 amps. L.R. (suitable for 10 amp. load). These are brand new, at zero reading, simple to install. We offer a few only at only 39/6 each (despatch 3/6).

SYNCHRONOUS ELECTRIC CLOCK MOVEMENTS. 200/250 v 50 c. Fitted with spindles for hours, minutes and seconds hands. Self-starting, central hole fitting. Dia. 2 1/2 in. depth behind dial only 1 in. Very latest model. With dust cover. 29/6 (despatch 1/6). Sets of three hands to fit, in good style, for 5/7 in. dial 2/6 set, for 5/10 in. dial, 3/6 set.

SYNCHRONOUS TIME SWITCHES (Sangamo) for accurate pre-set switching operations on 200/250 v. 50 c. Providing up to 3 on-off operations per 24 hours at any chosen times, with day-omitting device (use optional). Capacity 20 amps. Compact housed 4 in. dia., 3 1/2 in. deep. With full instructions. £5/8/6 (despatch 2/6).

HIGHT INTERVAL TIME SWITCHES (Smith's). Spring driven. Closed circuit period continuously adjustable from 1 to 15 minutes. 15 amp. (230 v. A.C.) switching. 2 in. dia. by 2 1/2 in. long. Not calibrated. 17/6 (despatch 1/6).

OPERATION COUNTERS (mechanical). Brand new units with continuous rotary action, counting up to 6,000. One rev. per digit, with 1/10th indicator, will also count motor speeds. Counting forwards and backwards, suitable for tape recorder and film work. Size 3 1/2 in. by 1 1/2 in. sq. 29/6 (despatch 1/6).

MAINS RELAYS (magnetic devices) 230 v. A.C. coil, with 2-pole C.O. 4 amp. switching. Brand new, 2 1/2 x 1 1/2 x 1 in. 22/6 (despatch 1/-).

HIGH SPEED MOTORS (Delco). 1/10th H.P., 200/250 v. A.C./D.C., 10,000 r.p.m. Body 4 1/2 in. by 3 in. with 4 in. shaft proj. 1 1/2 in. Made for spin driers and ideal for ltrills, sanders, mixers, etc., new, 47/6 (despatch 2/-).

A.C. AMMETERS. 3 1/2 in. flush panel, first grade m/iron, 0/15 amps A.C. Brand new, 27/6 (despatch 1/6).

AIR THERMOSTATS (Kieft-Pullin). Adjustable range 30/90 deg. F. Switching capacity up to 15 amps A.C. In smart ivory housing 4 1/2 x 2 1/2 in. Easily installed, instructions with each. Right for greenhouses, rooms, labs., etc. 45/6 (despatch 2/-).

EXTRACTOR FANS. A very popular line. Well-made units at much lower than normal price. 200/250 v. A.C. induction motor, silent running, no interference. With mounting frame and back grille, ready for easy installation. With 8 in. impeller (10 in. overall dia.), 200 C.F.M. £5/5/-, 10 in. impeller (12 in. overall), 240 C.F.M. £5/12/6. Also minor model, 6 in. overall dia. 75 C.F.M. £4/12/6 (despatch any one 3/-).

COMPLETE SEWING MACHINE MOTOR OUTFITS. No better job obtainable at any price. 200/250 v. A.C./D.C. Fitted latest radio/T.V. suppressors. Comprising motor with fixing bracket, foot control and switch, needle light with switch, belt, etc. and instructions for easy fixing to ANY machine. The complete outfit, still £8/15/- (despatch 3/-).

3-VOLT MOTORS (ex Ford car heater blowers). 3 in. long by 2 1/2 in. dia. Shaft proj. 1/2 in. Very quiet running. 13/6 (despatch 2/-).

BLINKER SWITCHES for car R. & L. indicators. Compact units for one-hole dash mount. Blinking period up to 15 sec., each setting with automatic "off." Precision made, brand new, 10/6 (despatch 1/-).

SMALL GEARED MOTORS. Our well-known speciality. Over 1,000 different final speeds and torques, between 0.2 r.p.m. and 840 r.p.m. Full details in our List GM/337—copy on request.

Stockists of Stuart Centrifugal Pumps, B.P.L. Measuring Instruments, Philips Variable Transformers—immediate delivery.

M. R. SUPPLIES, Ltd. 68, New Oxford Street, London, W.C.1
(Telephone MUSEum 2958)

EDDYSTONE COMMUNICATION RECEIVERS



Model 840A illustrated

HIRE PURCHASE TERMS

Model No.	Cash Price	Deposit	12 Monthly Payments	24 Monthly Payments
870	£33	£3	£2/13/9	£1/9/6
840A	£55	£5	£4/9/7	£2/9/2
888A	£110	£10	£8/19/2	£4/18/4
680X	£120	£10	£9/17/1	£5/8/1

Carriage paid per passenger train.

These sets are the choice of the discerning professional and amateur users. Descriptive literature gladly forwarded.






The
Eddystone
Specialists
RADIO SERVICES LTD.

51 COUNTY ROAD, LIVERPOOL 4

Telephone: AINTREE 1445

ESTAB. 1935

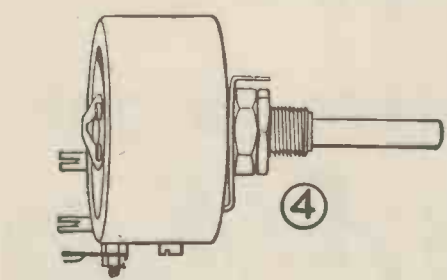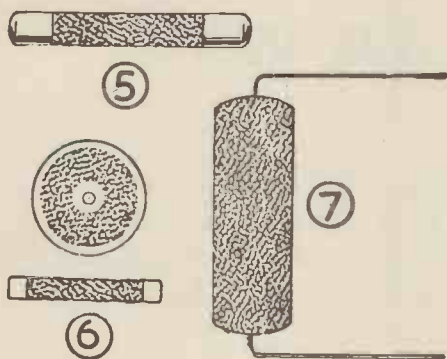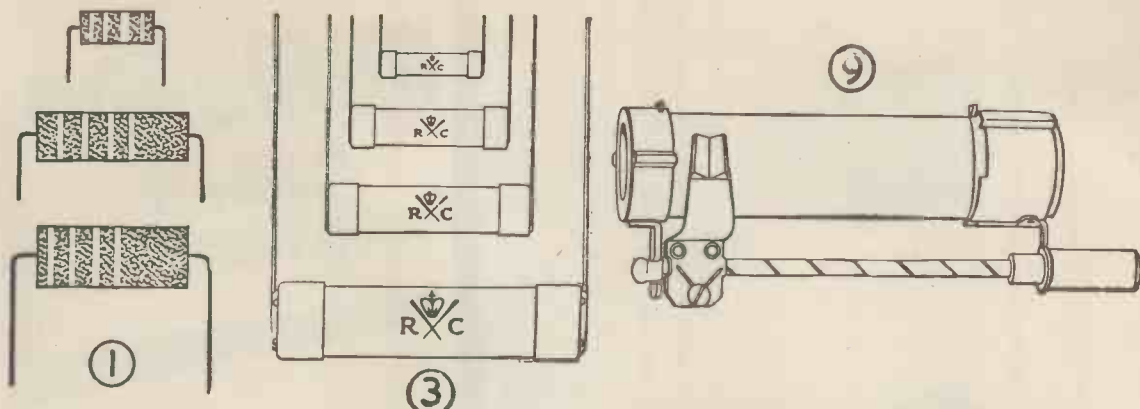


A SERVICE FOR DESIGNERS

The possibility of a component change — due to shortage of supplies, increased costs or failure to meet specific conditions — is a problem facing every designer of electronic equipment. However, one basic component can be 'tailor-made' from the start, for LAB will supply the precise type of Resistor required, ex stock and at the right price. Write for full technical data, prototype samples and price schedules to:—

THE RADIO RESISTOR CO. LTD.,
 50 ABBEY GARDENS, LONDON, N.W.8.
 Telephone: Maida Vale 0888

CARBON	WATTS	OHMIC RANGE	TOLERANCES ±
1. Solid	½ 1 & 2	10—10M	5% & 10%
2. Cracked	1/30—20	1—500M	5% & 10%
3. * High Stability	1/10—3	1—50M	0.5% 1% 2% 5%
4. Variable	½	5K—2M	—
5. V. High Resistance	¼—3	50M—10 ¹³	5% & 10%
6. V.H.F. (Rods & Discs)	1/10—1	10—1K	1% & 2%
WIREWOUND			
4. Rheostats	4—500	10—80K	—
9. Sliders	3—15	10—16K	—
8. Vitreous	3—500	1—150K	1% 2% 5%
7. Cemented	1—15	1—25K	5% & 10%

* The ubiquitous blue (1%) grey (2%) "HISTABS"

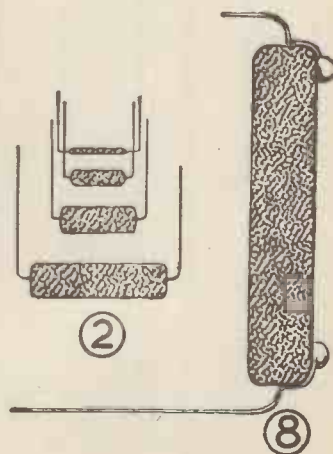

Do you KNOW

THAT the Sub-miniature 1/30th watt unit (2) is probably the smallest production Resistor made.

THAT almost non-inductive Resistors in cracked carbon are available up to 20 watts rating.






★ No cover and cable clamp worries. We connect your cable to plug or socket and pot the assembly in polythene. ★ 18 connections in less than 1 inch diameter. ★ Standard B9A valveholder mounting. ★ Nylon loaded P.F. mouldings. ★ Cadmium plated or gold plated pins and contacts.

Send for full details to:—

THE McMURDO INSTRUMENT CO. LTD., ASHTEAD, SURREY. Tel: ASHTEAD 3401 MPC19

BROOKES *Crystals*

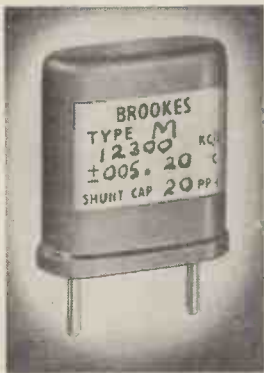

mean
DEPENDABLE
frequency
control

Illustrated left is a Type M Crystal Unit from a range covering 8 Mc/s to 17 Mc/s

- Frequency 12,500 kc/s.
- Hermetically sealed metal can.
- Frequency tolerance $\pm 0.01\%$ of nominal at 20°C., or better for special applications.

All Brookess Crystals are made to exacting standards and close tolerances. They are available with a variety of bases and in a wide range of frequencies. There is a Brookess Crystal to suit your purpose—let us have your enquiry now.



Brookes Crystals Ltd.,

Suppliers to Ministry of Supply, Home Office, B.B.C., etc.
LASSELL STREET, GREENWICH, S.E.10
Telephone: GREENWICH 1828/4482
Grams: Xtals, Green, London. Cables: Xtals London

where to get



we have them!

There's a Ful-Fi for stereo, there's a Ful-Fi for hi-fi equipment and a Ful-Fi for the average low gain amplifier. All give the fullest range and finest tone obtainable from any player. Ful-Fi cartridges and sapphire needles are standard fittings on every MONARCH and that's high praise indeed.

FUL-FI CARTRIDGES CAN BE FITTED INTO ALL STANDARD PICK-UP ARMS.

N.B. Maintain the standard of your Ful-Fi—always buy B.S.R. Ful-Fi replacement needles. Diamond Type now available.

N. MIERS & CO. LTD.

28 Piercing Hill, Theydon Bois, Essex.
Tel.: Theydon Bois 2460, 2469, 2141.

LONDON AND SOUTHERN ENGLAND AGENTS FOR BIRMINGHAM SOUND REPRODUCERS LIMITED

LEWIS have the CABINET for YOU!

AND THE FINEST EQUIPMENT TOO



THE GROSVENOR
Price £19.19.0

This elegant cabinet is available in veneered figured walnut and polished to a high gloss in a medium shade. Gold embellishments are an attractive feature of the design. 9in black legs are normally fitted. A three sliding door system provides ample storage room for tapes etc.

We can offer a very wide range of hi-fi and stereophonic equipment to fit this cabinet and any equipment purchased from us will be fitted and wired free of charge.



THE SERENADE
Price £13.19.6


Veneered with finest selected walnut, beautifully polished to a medium shade; this attractive cabinet has generous storage space, with board sliding out smoothly on metal rollers. This cabinet can be fitted with any of the latest Hi-Fi units.



THE CONTEMPORARY
Price £11.15.0

This beautifully designed Contemporary Cabinet can be supplied in Oak, Walnut, or Mahogany Veneer and has a waxed semi-matt finish.

This cabinet can be fitted with any of the latest Hi-Fi units.

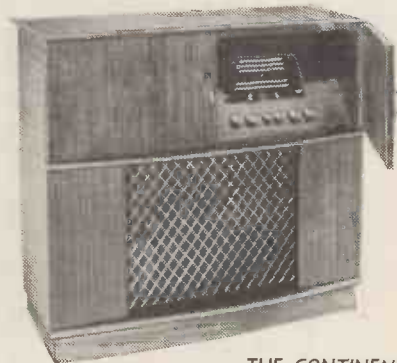

THE CONTINENTAL
Price £29.10.0

This elegant Cabinet is the finest in our range designed in the continental style. Solidly constructed and finished in oak, walnut or mahogany veneers. (Dark, medium or light, high gloss or satin finish available.)



THE SAVOY
Price £10.19.6

The Savoy is available in Walnut Veneer in medium colour with a high gloss finish. It has a silk covered baffle large enough to accommodate a 12in speaker and tweeter. The left hand compartment has a generous sized motor-board with a shelf above, both being covered by a sliding glass door.

LEWIS radio

120 GREEN LANES, PALMERS GREEN, LONDON, N.13
(Near The Cock Tavern)

Telephone: BO Wes Park 1155/6

FREE!

TWO NEW LEWIS CATALOGUES:—

The Cabinet Catalogue

The Equipment Comparator Catalogue

(Designed to assist your choice of cabinet and equipment.)

Please send me details of your two new catalogues.

Name

Address

BLOCK CAPITALS PLEASE



WW109

High frequency—High gain

OC23 Computing Transistor

The OC23 is designed and specially tested for driving square-loop ferrite computing elements and storage matrices. Its high f_{α} and power handling capabilities, however, suit it for a number of additional computing applications.


- Ferrite drive transistor providing 1-amp pulses with rise time $<0.8 \mu\text{sec}$.
- Half and full current pulse generator transistor for ferrite stores of up to 40,000 bits capacity.
- Gating transistor for use with ferrite stores.
- Clock pulse generator transistor for medium speed computers.

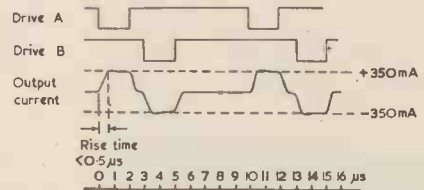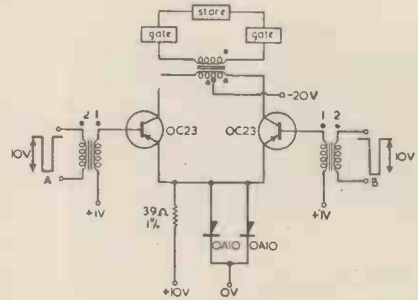

Pulse generator circuit for square loop ferrites

OC22 High quality industrial A.F. Transistor

The f_{α} of 2 Mc/s of the OC22 ensures that the negative feedback used in quality a.f. amplifiers does not cause h.f. oscillation. In addition, the α' gives a generous final gain even allowing for the inevitable reduction through negative feedback, thus reducing the power required from the drive stage. An extremely linear α'/I_C characteristic is yet another reason for using the OC22 in transistorised industrial a.f. equipment where quality is of paramount importance.

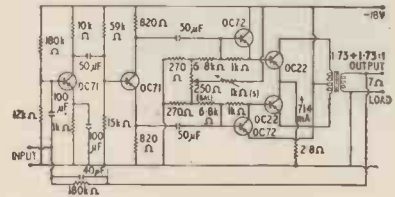


4-watt experimental a.f. amplifier circuit

- Total harmonic distortion at 4W output (measured at 400 c/s) ... $<1.0\%$
- Frequency response (400 c/s ref. level) ... $\pm 2 \text{ dB } 20 \text{ c/s to } 20 \text{ kc/s}$
- Feedback factor (with 2.5 k Ω source) ... 20 dB
- Sensitivity (input current for full output) ... 30 μ

OC24 Communications Transistor

The OC24 is particularly suited for communications applications. Two of these transistors are, for example, used in the output stage of a marine distress transmitter where they provide 4 watts c.w. at 500 kc/s. The OC24 can, of course, be used for modulated c.w. or telephony.

Another example of the application of the OC24 in the field of communications is a 12 channel telephone repeater amplifier which conforms to the full C.C.I.T. Specification. This amplifier has an output of 0.5 watt at 120 kc/s.

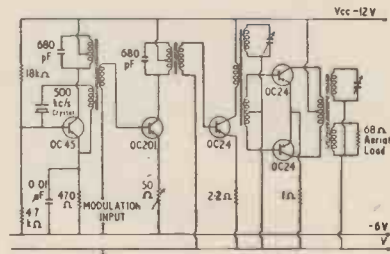

4-watt 500 kc/s Transmitter

Power transistors

10 watts dissipation

2 Mc/s average f_{α}

High frequency cut-off, high α' , high dissipation and low bottoming voltage are all combined in the Mullard OC23—a leading transistor of its kind in the world.

The OC23 and its companion types OC22 and OC24 are now being made by Mullard in extremely large quantities and are immediately available at economic prices. Telephone or write Mullard House for full information and assistance in selecting the type most suited for your particular application.



Germanium P-N-P Alloy Junction Transistors

Characteristics (at $T_{\text{junction}} = 25^{\circ}\text{C}$) for OC22, OC23 and OC24.

GROUNDING BASE

Collector Leakage Current
(at $V_c = -10\text{V}$, $I_e = 0$) $I_{c(o)}$ Typical 30 μA Max. 100 μA


Emitter Leakage Current
(at $V_e = -10\text{V}$, $I_c = 0$) $I_{e(o)}$ 20 μA 100 μA

GROUNDING EMITTER

Collector Bottoming Voltage
(at $I_c = 1.0\text{A}$, $I_b = 30\text{mA}$) V_{ce} -400mV* —

Current Amplification Factor
(at $V_c = -2\text{V}$, $I_c = 100\text{mA}$) $\bar{\alpha}'$ Typical 200 Min. —
(at $V_c = -2\text{V}$, $I_c = 1.0\text{A}$) $\bar{\alpha}'$ 150 50

* -400mV for OC23 and OC24 only. OC22 = -600mV.



MULLARD LIMITED
Semiconductor Division
Mullard House · Torrington Place
London W.C.1 · LAngham 6633

Mullard

semiconductor
division

Pye MICROWAVE

Portable

TV Links

Type PTC M1000

This transportable long-range television link is suitable for use with the N.T.S.C., C.C.I.R. or the British 405-line systems. A sub-carrier f.m. music link circuit is incorporated. The normal frequency range is 6875 to 7425 Mc/s but models can be supplied to cover the range of 5925 to 6425 Mc/s. The r.f. power output is one watt.

The equipment can be operated back-to-back as a demodulator repeater for multi-stage transmission links. Dependent upon siting, each link is capable of transmitting a distance of 50 miles or more.

Transmitter and receiver, as well as an r.f. wave-meter and intercommunication circuits are all contained in four lightweight luggage-type cases. Spun aluminium parabolic reflectors are available in diameters up to 10 ft., and all ancillary equipment can also be supplied.

Please write for details.

As supplied to:

ASSOCIATED TELEVISION LTD.
SCOTTISH TELEVISION LTD.
TYNE-TEES TELEVISION LTD.
CENTRAL REDIFFUSION SERVICES LTD.
PORTUGUESE TELEVISION SERVICE
ATOMIC WEAPONS RESEARCH
ESTABLISHMENT
and many other users



MICROWAVE LINKS

Wireless World

ELECTRONICS, RADIO, TELEVISION

OCTOBER 1959

Managing Editor:

HUGH S. POCOCK, M.I.E.E.

Editor:

F. L. DEVEREUX, B.Sc.

Assistant Editors:

H. W. BARNARD

T. E. IVALL

VOLUME 65 NO. 9

PRICE: TWO SHILLINGS

FORTY-NINTH YEAR
OF PUBLICATION

- 421 Editorial Comment
- 422 What Goes Wrong with TV? *By W. Oliver & J. Elworthy*
- 426 International Congress on Acoustics
- 429 Airshow Electronics
- 432 World of Wireless
- 434 Personalities
- 435 News from the Industry
- 437 The National Radio Show—in Retrospect
- 448 Elements of Electronic Circuits—6 *By J. M. Peters*
- 449 International Firato in Amsterdam
- 451 Technical Notebook
- 453 Hum, Rumble and Noise *By R. E. Cooke*
- 456 Paris Radio Show
- 457 Short-wave Conditions
- 458 Ferroelectrics—3 *By J. C. Burfoot*
- 463 Ferrite-Cored Aerials *By "Cathode Ray"*
- 467 Designing a Transistor Receiver—2 *By T. Snowball*
- 470 Forthcoming Meetings
- 472 Random Radiations *By "Diallist"*
- 474 Unbiased *By "Free Grid"*


Offices: Dorset House, Stamford Street, London, S.E.1

Please address to Editor, Advertisement Manager,
or Publisher, as appropriate

© Iliffe & Sons Ltd. 1959. Permission in writing from the Editor must first be obtained before letterpress or illustrations are reproduced from this journal. Brief abstracts or comments are allowed provided acknowledgment to the journal is given.

PUBLISHED MONTHLY (4th Monday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. Telephone: Waterloo 3333 (65 lines). Telegrams: "Iliffepres, Sedist, London." Annual Subscriptions: Home and Overseas £1 15s. 0d. Canada and U.S.A. \$5.00. Second-class mail privileges authorised at New York, N.Y. BRANCH OFFICES: BIRMINGHAM: King Edward House, New Street, 2. Telephone: Midland 7191. COVENTRY: 8-10, Corporation Street. Telephone: Coventry 25210. GLASGOW: 26B, Renfield Street, C.2. Telephone: Central 1265. MANCHESTER: 260, Deansgate, 3. Telephone: Blackfriars 4412. NEW YORK OFFICE: U.S.A.: 111, Broadway, 6. Telephone: Digby 9-1197.

FRAME GRID VALVES FOR TELEVISION

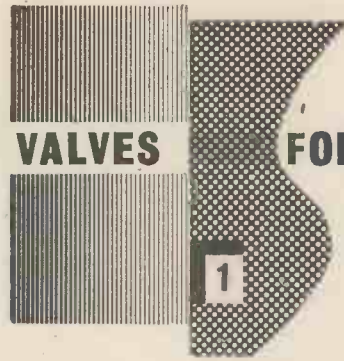

INTRODUCTION

The introduction of frame grid valves into the signal and intermediate frequency stages of the television receiver is a substantial and significant advance. When used in circuits which are not radically different from present practice, frame grid valves greatly increase the gain which is obtainable in the successive stages. Thus, a tuner designed round frame grid valves can have an overall gain of say 58dB, compared with the 48dB or so obtained with conventional valves. A major improvement is also obtainable in the i.f. stages. In receivers which have used three video i.f. stages, only two are now required.

BETTER PERFORMANCE

The advantages provided by frame grid valves may be summed up as: more gain per stage, better signal-handling ability, improved noise factor, and reduced cross-modulation.

A 'frame-grid' receiver in the normal reception areas shows a better performance for a given signal at the aerial. In fringe areas the improved performance can mean that specially modified receivers or elaborate aerials will often be unnecessary; the fringe area is, in fact, pushed further out, while, close to the transmitter, the risk of sound-on-vision is much reduced.

HIGH SLOPE

A frame grid valve is a high slope valve. In particular, it is a valve with an increased ratio of slope to grid-anode capacitance: that is, it has a good 'figure of merit', and high stage gain is achieved with the minimum of capacitive loading and loss of bandwidth.

High slope is a question of valve geometry. Briefly, for high slope it is necessary to have thin and closely-wound grid wires, and a very small clearance between grid and cathode. The obvious mechanical limitations to the achievement of high slope have been countered by the use of the frame grid. This device is a stiff rectangular frame on which extremely thin grid wires are wound under tension. The side-pieces of the frame are made to close tolerances, so that the finished grid consists of two perfectly flat, rigid, and parallel meshes of fine wire which are held a precise distance apart. A precision cathode is inserted between these meshes, and the

required grid-cathode clearances are ensured by suitable mounting arrangements.

With this sort of technique there is a much reduced need to make allowances for mechanical irregularities or for initial distortion or subsequent displacement of the grid windings. In fact the clearance between cathode and grid can be reduced to give slopes twice as great as those of conventional valves without risking grid-cathode shorts.

TELEVISION RANGE


The first Mullard frame grid valve for television is the PCC89 double triode for cascode r.f. stages. It is already widely used. Three more types will be introduced shortly: the PCF86 triode-pentode frequency changer; the EF183 variable-mu pentode for sound or vision i.f. stages; and a straight i.f. pentode, the EF184.

The EF183, which will be discussed in detail in the next advertisement in this series, has a slope of 12.5mA/V, comparing with 6.0mA/V for the EF85. The improvement in gain is of the order of 6dB in each i.f. stage.

The PCF86 has a slope of 12mA/V, compared with the 6.2mA/V of the PCF80, and the conversion conductance is 4.5mA/V instead of 2.1mA/V. Use of the PCF86 doubles the gain of the mixer stage. A substantially improved noise factor is obtained in a front end in which the PCF86 is preceded by the PCC89.

CIRCUITS

It should be noted that these new types cannot be used as direct plug-in replacements for earlier types. Valve pinning may not be the same; and, in any event, the improved characteristics of the frame grid types necessitate changes in circuit values. Detailed information will be given in subsequent advertisements.

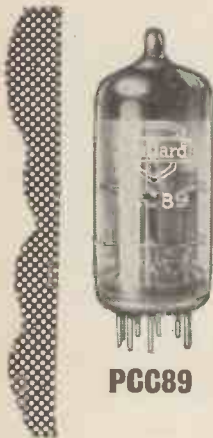

PCC89



MULLARD LIMITED

MULLARD HOUSE,
TORRINGTON PLACE,
LONDON, W.C.1



Acceleration over 30 000G

The proved reliability of the Brimar 'T' range of valves has been "built-in" as the result of experience gained from a programme of examination and testing. One of these tests is illustrated. Valves are placed in a rotor inside a chamber which is later evacuated. The rotor is then accelerated at high speed to simulate the effects experienced by super high speed aircraft flying at high altitudes. The information derived from this and other tests on valves for special applications is used to improve manufacturing techniques on commercial types: which makes Brimar the obvious choice when the demand is for a *reliable* valve.

better make it

BRIMAR

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

VALVE DIVISION: FOOTSCRAY · SIDCUP · KENT · FOOTSCRAY 3333



COMPONENTS
GROUP



Acos products for better listening:



ACOStereo Type 73
Turn-over cartridge for stereo, LP and standard records.



Acos Dust Bug for changer arms
Fits most arms. Reduces stylus wear. Protects your records.




Acos Styli
x500 tested, diamond and sapphire, for all Acos and many other makes of cartridge.


The Ring is around you

Hagen and Hunding (and Hammerstein) come to life in your sitting room with ACOStereo equipment. ACOStereo Type 71 cartridge, for instance, fits many popular arms and plays a key part in converting conventional players into stereo. ACOStereo Type 73 is an outstandingly successful universal cartridge for stereo, LP and standard records, extensively used in many leading instruments.

Harrogate Audio Fair, Stand 12, Room 302



acos ARE DOING THINGS IN STYL!

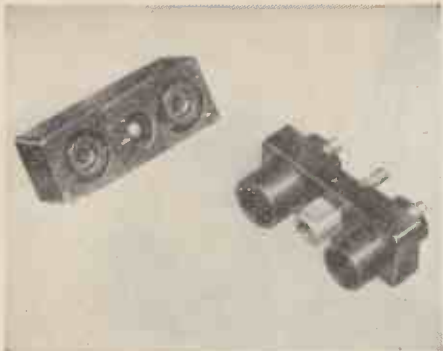

Actual size

This connector contains two large pins or sockets and, in common with the rest of the range, an earthing pin. The pins are gold- or silver-plated brass (-/Au or -/Ag respectively) and the sockets are gold- or silver-plated beryllium copper, four slotted to give the necessary resilience. Insulation is Araldite GL.125, which gives this component a higher working temperature than the rest of the range. It also results in a higher voltage, conforming to B.S.415 on creepage distance, so that it can be used with mains voltages.

**L.1390/P/Au or Ag.
TWO-PIN PLUG**

**L.1390/S/Au or Ag.
TWO-PIN SOCKET**

Specification: B.S.145

Voltage proof: 2 kV

Breakdown voltage:
Greater than 5 kV (provisional)

Max. working temp:
150°C

"BELLING-LEE" MINIATURE UNITORS

Max. working voltage:
400V d.c.

Voltage proof: 1800 d.c.

Voltage breakdown:
3750V d.c. (between outer of coaxial and earth when used with L.1404 shroud)

Weight:
25.9 gm. (1.04 oz.)

Insulation: Unitor body. Black phenolic. Dielectric. P.T.F.E.


Withdrawal force:
2 kg (4.5 lb.) approx.

**L.1391/P/Au or Ag.
DOUBLE
COAXIAL PLUG**

**L.1391/S/Au or Ag.
DOUBLE
COAXIAL SOCKET**

These contain two coaxial connectors and an earth pin: they can be used with cable having an outside diameter of 0.16 in., and enable R.F. and pulse signals to be taken in or out of a plug-in unit.

Available with a centre earth connection and polarising key. The outer conductor is aluminium alloy, the socket being resilient, restrained by a nylon circlip. The centre conductor is gold- or silver-plated brass (-/Au or -/Ag respectively).

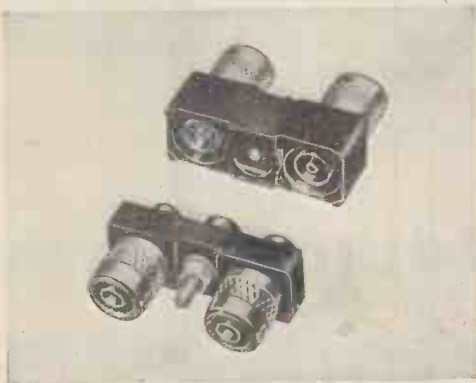

Actual size

Most 'Belling-Lee' products are covered by patents or registered designs, or applications.



BELLING & LEE LTD
GREAT CAMBRIDGE ROAD, ENFIELD, MIDD., ENGLAND

Regd. Telephone: Enfield 3322 • Telegrams: Radiobel, Enfield

"BELLING-LEE" NOTES

Parameters of Design

Further notes on Sealing and Type Testing

No. 9 of a series

In the September issue, No. 8, we talked of transistors, and of the necessity for near perfect sealing. In No. 7 of the series we mentioned the humidity chamber as a type test tool to indicate water absorption in a material or lack of seal. To avoid confusion, the difference between hermetic and non-hermetic sealing must be appreciated. Hermetic sealing is achieved by soldering, welding or fusion, as with glass to metal seals used in transistors. Non-hermetic sealing is achieved by compression washers etc., but many components sealed with washers are so perfect that leakage is measured in lusecs. A moulding from a suitable powder—straight from the tool, with a perfect surface—may be non-absorbent, but break the surface by drilling, and moisture may enter. This would show up after exposure in a humidity chamber.


A humidity chamber is a container in which water vapour or moist air is circulated by one or more fans. The articles or material to be tested are placed upon perforated shelves, or are suspended freely. The design of the chamber is such that the conditions are even throughout, e.g. care is taken to avoid the possibility of drips falling upon any one specimen.

Tests start with a 16 hour dry cycle at about 100°C, followed by 16 hours' cycling between 53°C and 57°C. The chamber is then allowed to cool down to the ambient temperature, with the fans maintaining the circulation of air within the chamber. Wet and dry bulb thermometers show that a humidity of about 98% is achieved. After exposure to these stringent conditions, free droplets are shaken off the specimens, which are then tested electrically; surface leakage and insulation resistance etc. give an indication of water absorption. High contact resistance would show up corrosion of contact surfaces. These tests are intended to simulate in a few weeks what would happen over a long period; they are in fact accelerated tests. Defects in plating, corrosions due to the proximity of unlike metals or unsuitable substances are quickly shown up.

The tests are capable of great variations. Salt spray may be introduced, or fungus growth. Samples may also be subjected to vibrations at stated frequencies, bumps, low pressure simulating say 100,000ft., high and low temperature, all may require current flowing at specified voltages.


Advertisement of
BELLING & LEE LTD.

Great Cambridge Rd., Enfield, Middx.
Written 16th September, 1959

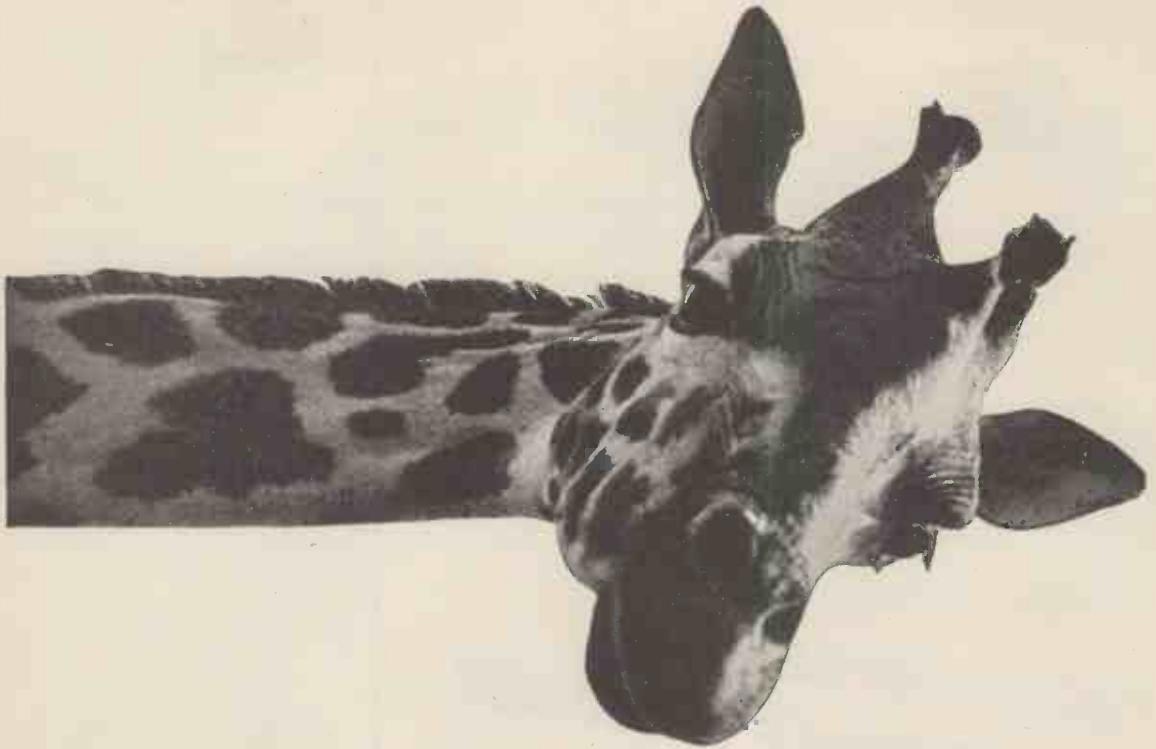

Sticking our necks out?

G.E.C. announce maximum junction temperature uprating to 85°C for their audio transistors. We know this claim isn't too tall because we have sound reasons for making it. Recently our manufacturing techniques have been improved to the extent that life tests show that we can now quote an 85°C continuous working maximum junction temperature for G.E.C. germanium audio transistors. As a result of this the already high maximum collector dissipation ratings have been increased even further. These new ratings, coupled with the typical alpha cut-off frequencies of about 1Mc/s, make the G.E.C. range of audio transistors unique.



AUDIO TRANSISTORS



	LOW NOISE	LOW POWER†					MEDIUM POWER†		
	Maximum noise factor=5dB (f=1kc/s, R _s =500Ω V _{ce} =-2V, I _e =0.5mA)	Maximum collector dissipation at 45°C=200mW at 55°C=150mW					Maximum collector dissipation at 45°C=800mW at 55°C=600mW (on 3"×3" cooling fin)		
ic(pk)(A)	—	I					J		
	GET106	GET114	GET113‡	GET103	GET102‡	GET104	GET115	GET116	GET105
V _{ce} (pk)(V)	15	15	15	30*	30*	30	15	30*	40*

‡ New high gain types * Re/R_b>0.03 † Can be supplied in matched pairs

Aspects of design 15

This is the Fifteenth of a series of special features dealing with advanced problems in television and radio circuit design to be published by Siemens Edison Swan. The Ediswan Mazda Applications Laboratory will be pleased to deal with any questions arising from this or other articles, the Sixteenth of which will appear in the November 1959 issue.

MAINS VOLTAGE DROPPING RESISTORS FOR SERIES RUN A.C./D.C. TYPE VALVES

Equipment designers are often faced with the problem of having to decide whether common dropping resistors may be employed for both heater and anode current circuits, or whether the two circuits should be kept entirely independent of each other. As with so many problems of this nature, the answer depends on the standard of reliability required and the additional cost which the extra components would involve.

The use of common dropping resistors inevitably results in a greater spread of working heater current to which the valves are subjected. This increased spread may be due to the following factors:—

1. The variation of mean anode current due to A.G.C.
2. Variations in mean anode current between individual equipments due to component tolerances and normal valve characteristic variations.
3. The large difference in the r.m.s. value of the anode current between operation on a.c. and d.c. mains.

The importance of the anode current component in relation to the total spread of heater current will depend on the ratio of the r.m.s. value of the anode current component to the r.m.s. value of the total current supplied to the equipment.

The purpose of this article is to indicate how these r.m.s. values may be calculated, two typical examples being quoted to illustrate the method.

It can be shown that the mean square value of the input total current = $I_h^2 + n^2 I_A^2 + m I_h I_A$

where I_h is the r.m.s. value of the heater current

I_A is the mean value of the rectified supply to the valve anodes and screens.

n is the ratio of r.m.s. to mean rectifier current, and is dependent only on the rectification efficiency.

m is a constant which also depends only on the rectification efficiency.

The term rectification efficiency is, for this purpose, defined as the ratio of mean rectified voltage to the peak a.c. applied voltage (sine wave input).

In the table below are shown values of m and n for rectification efficiency ratios between 0.6 and 1.0, for a half wave rectifier.

Rectification Efficiency	0.6	0.65	0.7	0.75	0.8	0.85	0.9	0.95	1.0
m	2.56	2.59	2.63	2.66	2.68	2.72	2.76	2.80	2.83
n	2.03	2.10	2.19	2.30	2.44	2.58	2.87	3.36	—

An estimate of rectification efficiency may be obtained, for a particular set of conditions, by one of the following methods:

1. Reference to the rectifier manufacturer's regulation curves.
2. Calculation from generalised regulation curves (see for example "Radio Designer's Handbook" 4th Edition p.1172).
3. Direct measurement in a particular circuit.

SIEMENS EDISON SWAN LIMITED *An A.E.I. Company*
 Technical Service Department, 155 Charing Cross Rd., London, W.C.2.
 Telephone: GERrard 8660. Telegrams: Sieswan, Westcent, London.

It should be stressed here that the rectification efficiency is dependent on the amount of series resistance in the rectifier anode circuit, and that the efficiency is modified by employing voltage dropping resistors, even though the input r.m.s. voltage may be measured at the rectifier anode.

EXAMPLE No. 1

An A.M./F.M. Broadcast receiver employs 0.1 amp valves in a series heater chain. A half wave rectifier is employed and supplies a mean current of 70 mA to the valve anodes and screens. It is estimated that the rectification efficiency will be 0.85.

From the table it is seen that $m = 2.72$

$$n = 2.58$$

$$\begin{aligned} \text{The r.m.s. value of the anode current} &= n I_A \\ &= 2.58 \times 0.07 = 0.18 \text{ amps.} \end{aligned}$$

and the r.m.s. total current

$$\begin{aligned} &= \sqrt{I_h^2 + n^2 I_A^2 + m I_h I_A} \\ &= \sqrt{0.1^2 + 0.18^2 + 2.72 \times 0.1 \times 0.07} \\ &= 0.248 \text{ amps.} \end{aligned}$$

It can be seen that when this receiver is operated on a.c., the predominating component is the r.m.s. anode current.

If the receiver were operated on a d.c. mains supply, the H.T. current would probably fall to about 60 mA or less due to the lower H.T. voltage and the total set current would be about 0.16 amps. If common dropping resistances were used when operating on a 240 V supply, the rectifier anode being connected at the 200 V point, and the value of the resistances being calculated for the a.c. conditions, there would be an appreciably lower voltage drop than 40 volts on d.c., but it must be remembered that there is some self compensation due to the resulting rise in the total current.

This is a case where the designer would have to consider very carefully indeed all the factors involved;— commercial, technical and economic, not forgetting the statistical probability of the receivers being employed on d.c. supplies; before coming to the decision to employ common dropping resistors.

EXAMPLE No. 2

A television receiver employs 0.3 amp valves in a series heater chain.

A half wave rectifier is employed and supplies a mean current of 250 mA to the receiver. The rectification efficiency is found to be 0.75 for the particular conditions of the receiver.

From the table it is seen that

$$m = 2.66$$

$$n = 2.30$$

The r.m.s. anode current = $2.3 \times 0.25 = 0.575$ amps and the r.m.s. total current

$$\begin{aligned} &= \sqrt{0.3^2 + 0.575^2 + 2.66 \times 0.3 \times 0.25} \\ &= 0.79 \text{ amps.} \end{aligned}$$

Here again it can be seen that the r.m.s. current to the rectifier anode is the predominating component even for a mean current of 250 mA, so that any departure from its "bogey" or nominal value would have an appreciable influence on the value of current through the heater circuits if common dropping resistors were employed.

In the example of the television set, the cathode ray tube heater would almost certainly be in the series heater chain, and in order not to overstress this expensive component by over or under-running its heater, it is accepted as good practice to employ separate voltage dropping resistors for the feed to the rectifier anode.


EDISWAN MAZDA 10P18

The 10P18 is a miniature based Output Pentode having a maximum anode dissipation of 12 watts. It is intended for use as the audio output stage in a.c./d.c. mains powered equipment which uses series connected heaters.

Heater Current (amps)	I_h	0.1
Heater Voltage (volts)	V_h	45



BASE:
NOVAL B9A



VIEW OF FREE END

MAXIMUM DESIGN CENTRE RATINGS

Anode Voltage (volts)	$V_a(\text{max})$	250
Screen Voltage (volts)	$V_{g2}(\text{max})$	200
Anode Dissipation (watts)	$P_a(\text{max})$	12
Screen Dissipation (continuous) (watts)	$P_{g2}(\text{max})$	1.75†
Mean Cathode Current (mA)	$I_{h(\text{mean})\text{max}}$	100
D.C. Heater to Cathode Voltage (volts)	$V_{h-k}(\text{max})$	200

†On speech and music the permissible rating at maximum signal voltage is 6 watts.

CHARACTERISTICS

Taken at $V_a = V_{g2} = 170V$, $V_{g1} = -12.5V$, $I_a = 70\text{ mA}$.

Mutual Conductance (mA/V)	g_m	10
Anode Resistance ($\frac{\partial V_a}{\partial I_a}$) (kΩ)	r_a	23
Inner Amplification Factor	μ_{g1-g2}	8

TYPICAL OPERATION

Single Valve Class A Audio Amplifier.

Anode Voltage (volts)	V_a	160
Screen Voltage (volts)	V_{g2}	170
Anode Current (quiescent) (mA)	$I_a(o)$	70
Screen Current (quiescent) (mA)	$I_{g2(o)}$	5
Grid Bias (volts)	V_{g1}	-12.5
Power Output for 10% Total Harmonic Distortion (watts)	P_{out}	5.2
Anode Load (ohms)	R_a	2,200
Input Swing for 10% Total Harmonic Distortion (r.m.s. volts)	$V_{in(r.m.s.)}$	7

These operating conditions are taken with fixed d.c. potentials.

INTER-ELECTRODE CAPACITANCES (pF)

Grid 1 to Earth	C_{in}	12.4	12.9	14.6
Anode to Earth	C_{out}	6.5	7.7	8.8
Anode to Grid 1	C_{a-g1}	0.45	0.50	0.50
Grid 1 to Heater	C_{g1-h}	0.09	0.12	0.14


*Inter-electrode capacity in fully shielded jig, without can.

†Inter-electrode capacity with holder balanced out. (Using holder quoted below.)

‡Total inter-electrode capacity including B9A nylon phenolic holder without skirt or radial shield (Siemens Ediswan Clix Holder Type VH19/902).

DIMENSIONS



Maximum Overall Length (mm)	78.5
Maximum Diameter (mm)	22.2
Maximum Seated Height (mm)	71.5

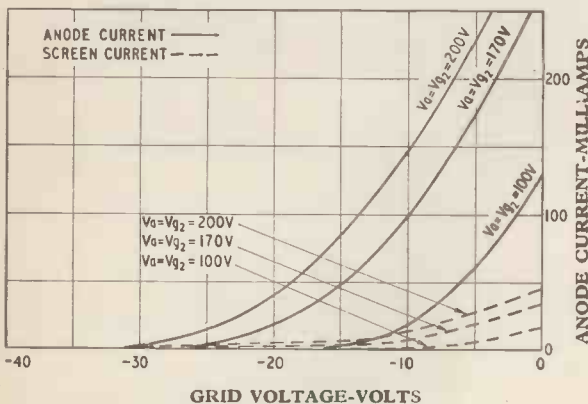

VALVES FOR A.C./D.C. BROADCAST RECEIVERS



Characteristic Curves of Ediswan Mazda Valve Type 10P18

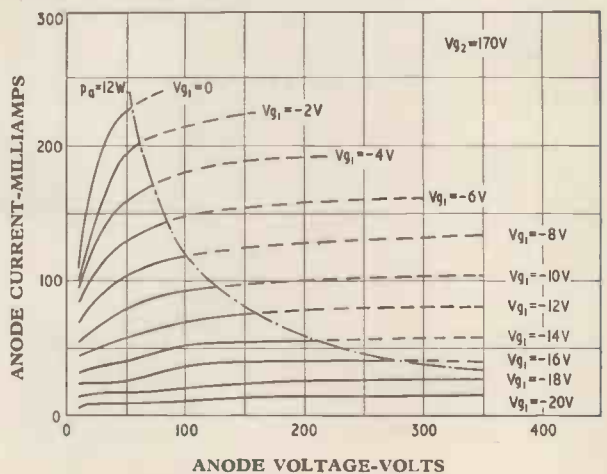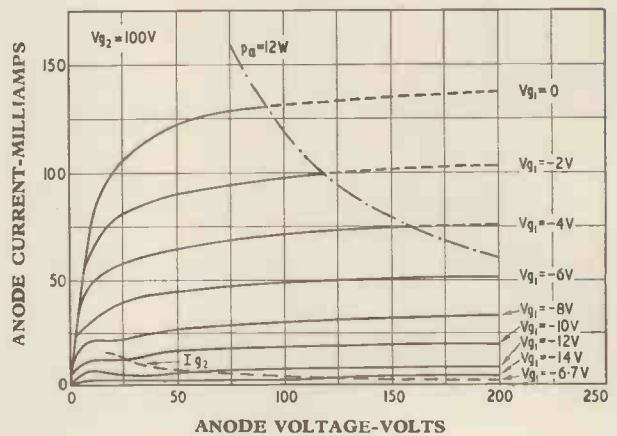


SIEMENS EDISON SWAN LIMITED An A.E.I. Company
 Technical Service Department, 155 Charing Cross Rd., London, W.C.2.
 Telephone: GERrard 8660. Telegrams: Sieswan Westcent, London.

EDISWAN
MAZDA

Marconi in Telecommunications

The post and
telegraph
authorities
of more than
80 countries
use Marconi
equipment

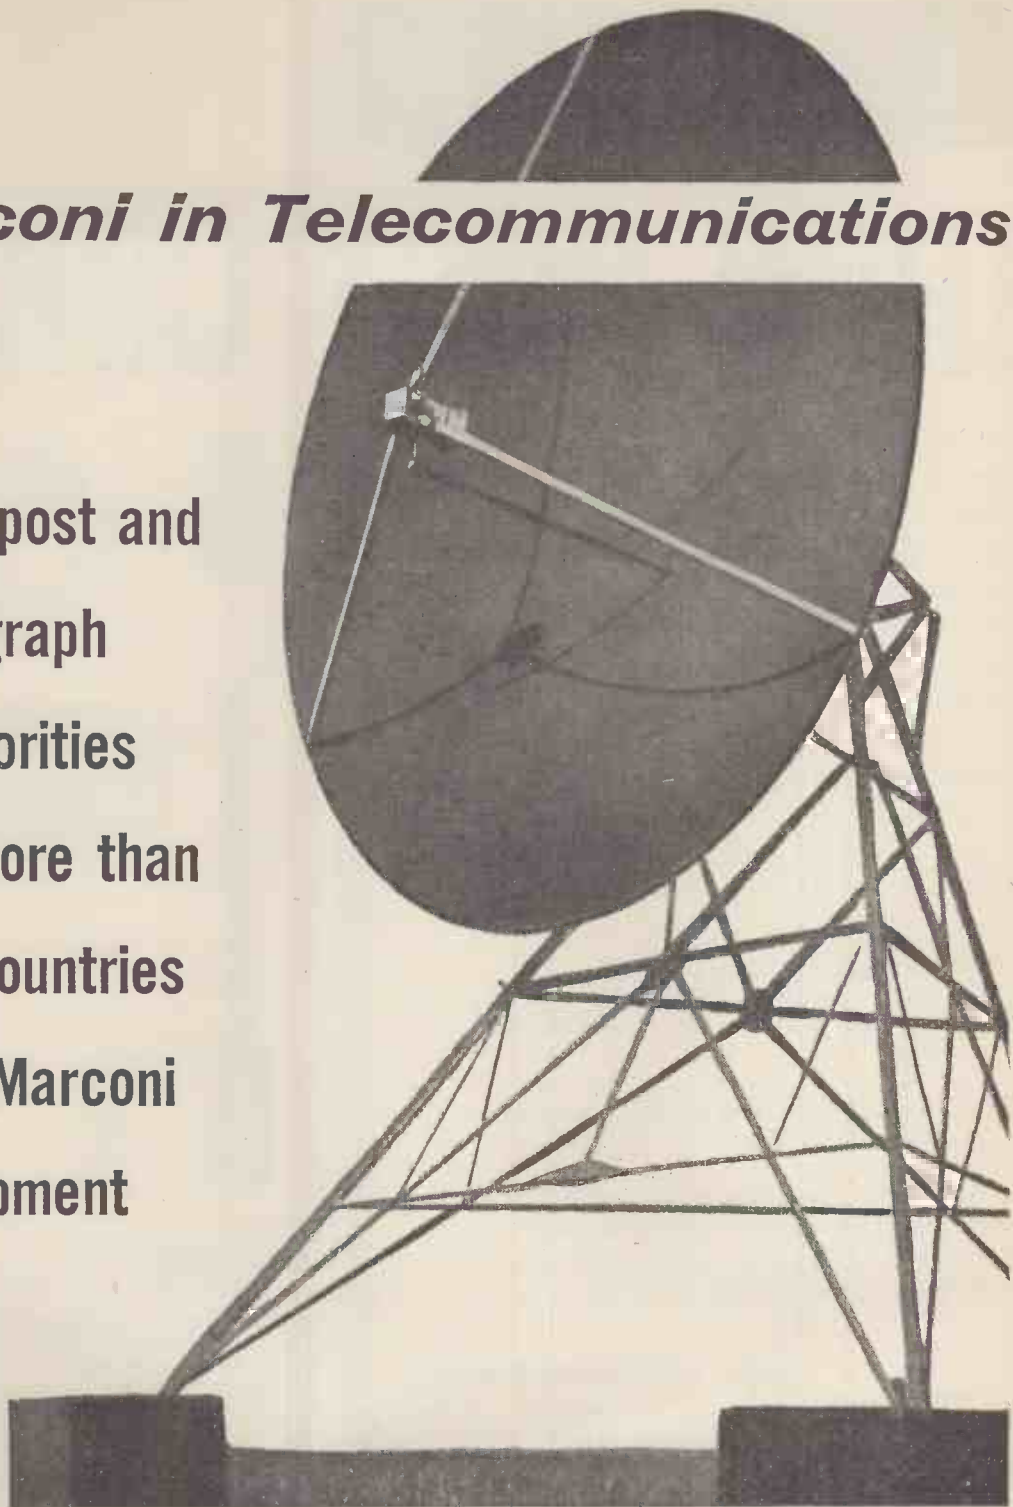

MARCONI

COMPLETE COMMUNICATIONS SYSTEMS
SURVEYED • PLANNED • INSTALLED • MAINTAINED

MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED, CHELMSFORD, ESSEX, ENGLAND.

M1

Caslite

IRON DUST CORES

Recent development in the production of Caslite iron dust powders make it possible to offer a range of cores suitable for use at any frequencies—up to 300 mc/s in favourable circumstances. Strong and light, possessing the electrical characteristics appropriate to the application, Caslite iron dust cores provide a ready answer to many of today's design and production problems, particularly in the growing fields of VHF, television and frequency modulation. They are supplied in a wide range of standard sizes and shapes, but the powders can be bonded and moulded into almost any shape to suit customers' special requirements. Comprehensive brochure on Caslite Iron Dust Cores available on request.


- * Effective permeability to $\pm 2\%$
- * Q factor not lower than 5% below agreed standard
- * Mechanical sizes held to within normal tolerances
- * Standard cores include: Screw Cores, including the new self locking feature—Cup or Pot Assemblies, Standard Insert Types, Sleeves, Cylinders and Discs, Choke Cores.

CHEMICAL AND METALLURGICAL DIVISION
COMPONENTS GROUP
THE PLESSEY COMPANY LIMITED

Wood Burcote Way, Towcester, Northants. Tel: Towcester 312

Overseas Sales Organisation:
Plessey International Limited · Ilford · Essex · Telephone Ilford 3040

Plessey

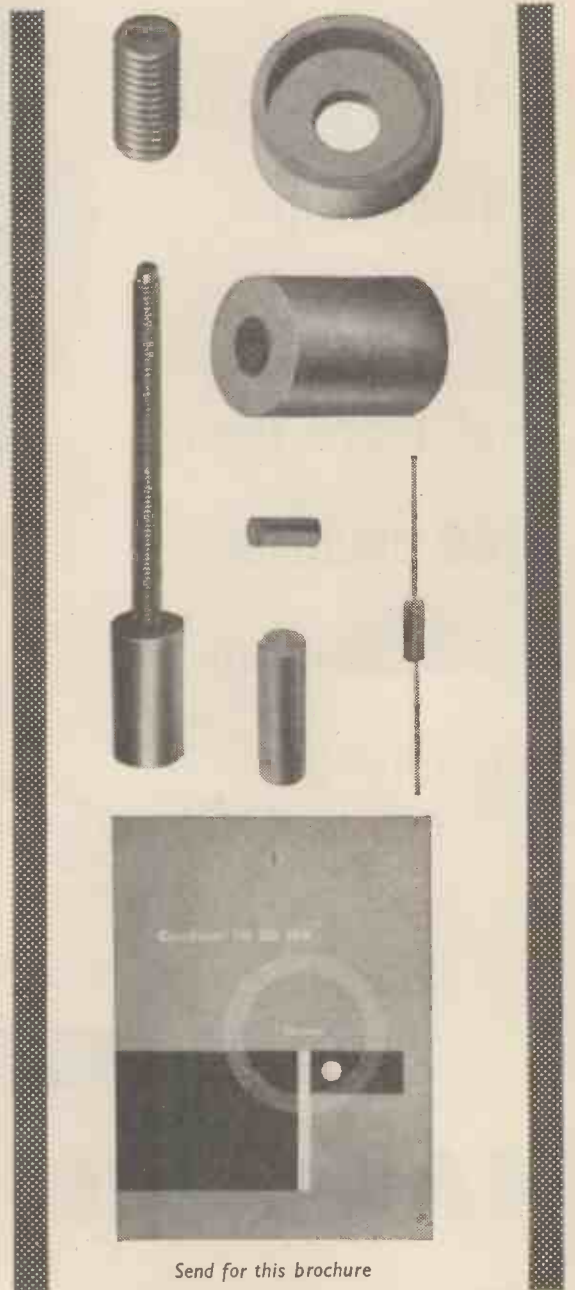


Send for this brochure

The very best connections

... secured by **Plessey**

SUB-MINIATURE COAXIAL CONNECTORS

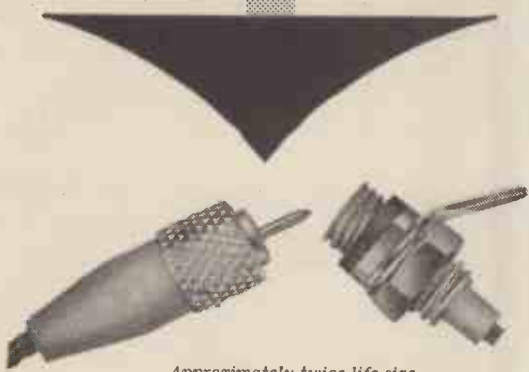


Approximately twice life size

As a contribution towards increasingly compact equipment, Plessey have introduced this new, highest quality and fully comprehensive range to allow a new approach on applications hitherto restricted by the limitations of existing connectors.

Designed for the matched impedance coupling of high frequency coaxial cables operating in the super high frequency bands, these connectors—

- * have a working voltage of 650 volts Peak at sea level, and matched impedance coupling of 50 ohm lines is accommodated.
- * have hard gold plated contacts on silver plate to give maximum performance with minimum voltage drop.

SERIES '110' (15- and 30-way) MINIATURE RECTANGULAR CONNECTORS

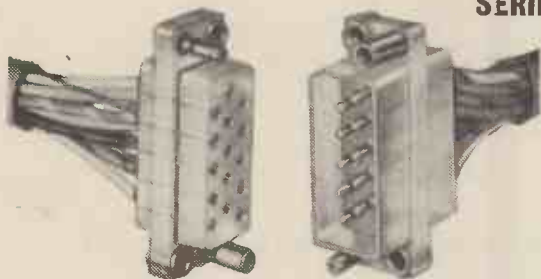

Developed specifically by Plessey to meet the demand for a safe, inexpensive connector for commercial applications, this new series embodies excellent electrical and mechanical characteristics, and the many unique features that make it really outstanding include:—

- * Plug pins and socket inserts are polythene shrouded to dispense with gaskets and ensure insert anchorage.
- * Mismatching is prevented by corner pins and corner sockets.
- * Extreme simplicity of wiring, demands less-skilled operation than the orthodox methods of soldering pins *in situ*.

For further information, please write for Publication numbers 128 and 114.

Plessey

WIRING & CONNECTORS DIVISION · THE PLESSEY COMPANY LIMITED

CHENEY MANOR · SWINDON · WILTS · TELEPHONE: SWINDON 6251

Overseas Sales Organisation: PLESSEY INTERNATIONAL LIMITED ILFORD ESSEX


**EDISWAN
MAZDA**

SEMICONDUCTOR

NEWS

NEW AUDIO OUTPUT TRANSISTORS

These new Ediswan Mazda transistors will be of special interest to designers and engineers concerned with audio output circuits of portable radios, amplifiers, and similar equipment. They offer low thermal resistance and high and level d.c.β. Full particulars of Ediswan Mazda Semiconductors will be sent gladly on request. If you wish to keep up to date with the latest developments in this field, please ask us to add your name to our semiconductor mailing list.

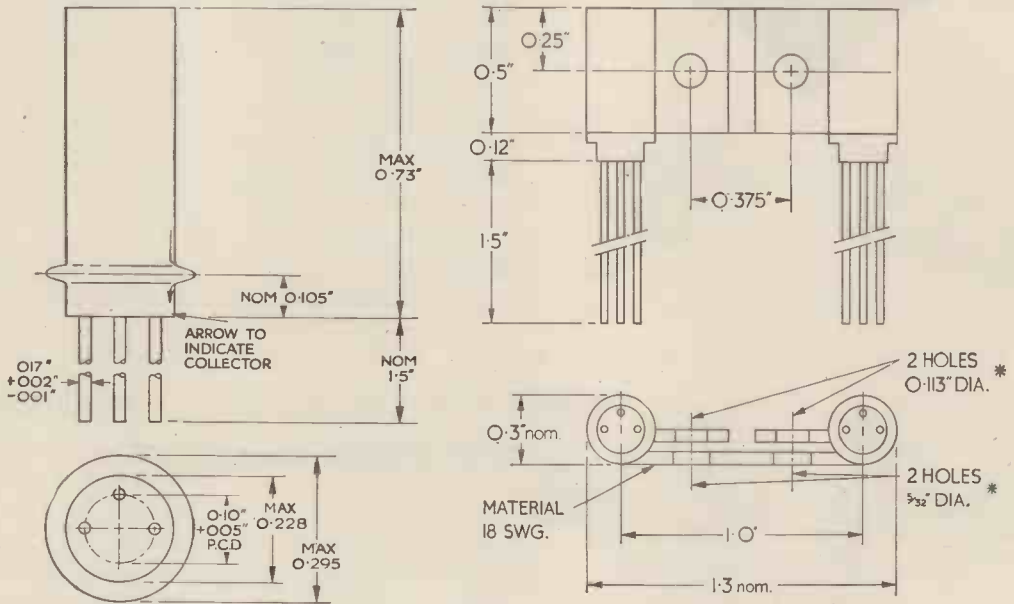

GERMANIUM PNP JUNCTION TYPE XC 121

Maximum Peak or Mean Collector/Emitter Voltage (Common Emitter Circuit)	(volts)	—16
Maximum Peak or Mean Collector/Base Voltage (Common Base Circuit)	(volts)	—35
Maximum Peak Collector/Emitter Voltage with Base driven to cut off (Common Emitter Circuit) or with $R_{b.e} < 500 \Omega$	(volts)	—35
Maximum Peak or Mean Emitter/Base Voltage	(volts)	—12
Minimum d.c. β at $I_c = -200\text{mA}$, $V_e = -1\text{v}$		40
Minimum d.c. β at $I_c = -50\text{mA}$, $V_e = -1\text{v}$		48
Maximum Junction Temperature	(°C)	75
Thermal Resistance in Free Air	(°C/mW)	0.2

GERMANIUM PNP JUNCTION TYPE XC 131

(Matched pair of XC121's complete with heat sink for Class B Push-Pull Output Stage)

Maximum Peak or Mean Collector/Emitter Voltage (Common Emitter Circuit)	(volts)	—16
Maximum Peak or Mean Collector/Base Voltage (Common Base Circuit)	(volts)	—35
Maximum Peak Collector/Emitter Voltage with Base driven to cut-off (Common Emitter Circuit) or with $R_{b.e} < 500 \Omega$	(volts)	—35
Maximum Peak or Mean Emitter/Base Voltage	(volts)	—12
Minimum d.c. β at $I_c = -200\text{mA}$, $V_e = -1\text{v}$		40
Minimum d.c. β at $I_c = -50 \text{mA}$, $V_e = -1\text{v}$		48
Maximum Junction Temperature	(°C)	75
Thermal Resistance with Heat Sink when clamped to aluminium plate of 12 sq. in. minimum area	(°C/mW)	0.1

EDISWAN SEMICONDUCTORS
 MAZDA
 SIEMENS EDISON SWAN LIMITED An A.E.I. Company. VALVE CRT & SEMICONDUCTOR DIVISION
 155 CHARING CROSS ROAD, LONDON, W.C.2 Tel: GERrard 8660 'Grams: Sieswan, Westcent, London

Vortexion quality equipment



The W.V.A. tape recorder now has provision for Stereo plug in heads to enable this recorder to replay Stereo. The regular models are retained with additions and improvements. Our high standard which has made these recorders famous has been maintained, resulting in their being chosen for the foremost musical centre in this country.

TWELVE-CHANNEL ELECTRONIC MIXER



This is similar to the 4-channel, but is fitted with 12 hermetically sealed controls, 12 balanced line microphone transformers potted in mu-metal boxes, and a mains transformer also potted in mu-metal. All components which can affect noise are tested and selected before insertion. It is supplied in standard steel case or 7in. rack panel.

30/50 WATT AMPLIFIER



Gives 30 watts continuous signal and 50 watts peak Audio. With voice coil feedback distortion is under 0.1%, and when arranged for tertiary feedback and 100 volt line it is under 0.15%. The hum and noise is better than - 85 db referred to 30 watt.

It is available in our standard steel case with Baxendale tone controls and up to 4 mixed inputs, which may be balanced line 30 ohm microphones or equalised P.U.s to choice.

120/200 WATT AMPLIFIER




Will deliver 120 watts continuous signal and over 200 watts peak Audio.

It is completely stable with any type of load and may be used to drive motors or other devices to over 120 watts at frequencies from 20,000 down to 30 cps in standard form or other frequencies to order. The distortion is less than 0.2% and the noise level - 95 db. A floating series parallel output is provided for 100-120 V. or 200-250 V. and this cool running amplifier occupies 12½ inches of standard rack space by 11 inches deep. Weight 60lb.

VORTEXION LIMITED,
257-263, The Broadway,
Wimbledon, London, S.W.19

Telephones: LIBerty 2814 and 6242-3
Telegrams: "Vortexion, Wimble, London."

Full details and prices of the above on request

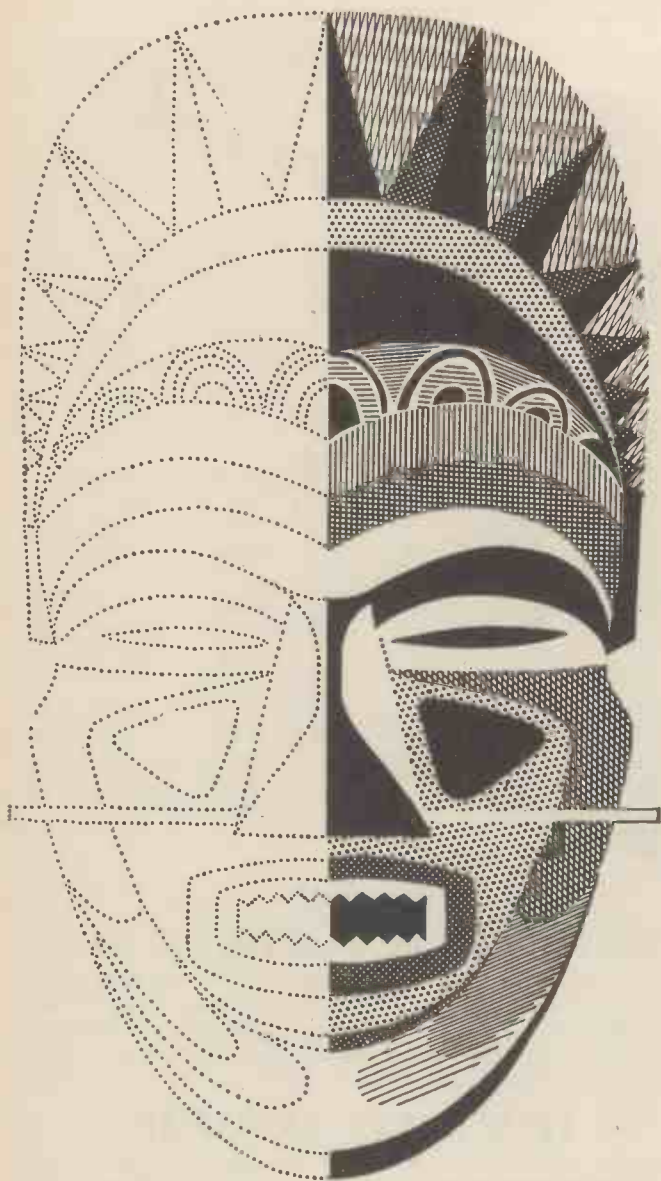

colour brings a new magic to T.V.


E.M.I. has now introduced the latest addition to its range of camera channels: the 3-vidicon Colour Camera Channel Type 204. Smaller, easier to use and less expensive than existing colour equipment, the type 204 gives true-to-life colour reproduction. It is suitable for broadcast use as well as medical and industrial applications.

The new camera uses three vidicon tubes and a novel optical system to give an improved colour quality, even under difficult lighting conditions.

Outstanding features include:

- * *Excellent signal/noise ratio*
- * *Stability of colour registration*
- * *High level clamping*
- * *Stabilised gain of amplifiers*

E.M.I. brings in the colour camera

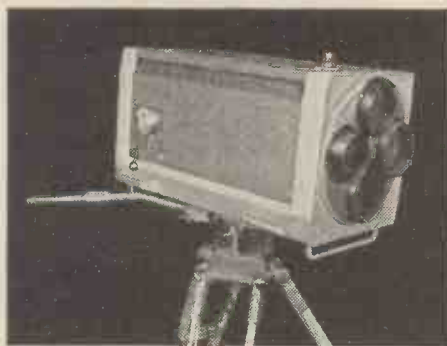

For full details please apply to:

E.M.I. ELECTRONICS LIMITED

BROADCAST EQUIPMENT DIVISION · HAYES · MIDDLESEX · TEL: SOUTHALL 2468

Transistorized Power Units




HIGHLY STABILIZED OUTPUT
VERY LOW OUTPUT IMPEDANCE
VERY SMALL RIPPLE CONTENT

MODEL 1328 LABORATORY POWER UNIT

Model 1328 provides a continuously variable output monitored by two front-panel, mirror-scale, voltage and current meters. It is eminently suitable for use in the design stage of transistor circuits where a power supply of high purity is essential.

Output: 0-30V at 1A.



(chassis mounting)

MODELS 1326 & 1329 LOW VOLTAGE POWER UNITS

The 6V Transistorized Power Unit Model 1326 is an ideal supply for transistor d.c. amplifiers, transistor pulse-technique circuits and filaments of thermionic valve amplifiers, particularly in low-level microphone stages.

MODEL 1326
 Output: 6V at 0.2A.

MODEL 1329
 Output Voltage: Continuously variable 5V-10V.
 Output Current: 0-1A in range 5V-9V
 0-0.5A at 10V.

MODEL 1327 BATTERY ELIMINATOR

The Battery Eliminator Model 1327 has been designed primarily to power the Cossor Pre-amplifiers, Models 1430, 1434 and 1440, but it can be used in many other applications requiring a power unit to provide high and low tension supplies.

L.T. Supply: Output 6V-6.5V at 1.7A
 H.T. Supply: Output 120V at 15mA.



Please send for the latest Cossor Catalogue or ask for a representative to call and discuss your special requirements.

COSSOR INSTRUMENTS LTD

The Instrument Company of the Cossor Group

COSSOR HOUSE, P.O. BOX 64, Highbury Grove, London, N.5.

Telephone: CANonbury 1234 (33 lines).

Telegrams: Cossor. Norphone, London.

Cables: Cossor, London.

Codes: Bentley's Second.
 TAS/CI.18

DAVEY CORNER REFLECTOR SPEAKERS

In previous announcements we have extolled the virtues of Davey Corner Reflector speakers when used in pairs, either for full stereo reproduction or for twin-speaker reproduction of single channel records or radio.

Very striking these virtues are, as we can demonstrate at any time, but this is to remind you that the Corner Reflectors were originally designed for solo use, and it still remains true that the superiority in musical presentation of one Corner Reflector unit over one front-facing speaker of similar technical merit is of greater significance than the superiority of a pair of Corner Reflectors over a pair of front-facing units.

One Corner Reflector speaker really does give you a large part of the breadth, spaciousness and sense of perspective which are hailed as the leading advantages of stereo. There are Davey Corner Reflector Cabinets available to house almost any known combination of one, two, three or four speaker units.

Truly the twins are heavenly, but one good Corner Reflector will get you more than half way to heaven.

Call and see our range of Davey Corner Reflector speakers. Ask for a demonstration, which can be given without previous appointment.

E · M · G

HANDMADE GRAMOPHONES LTD.
6 NEWMAN STREET · LONDON W.1
MUSEUM 9971

All good 'Labs' use
Radiospares
quality components
for design
development and
prototype work

Service
Engineers!

Remember - Radiospares components are delivered absolutely "by return".

The Best Manufacturers use Grey & Marten 'Amalgam' solder

Grey & Marten make solders *specifically* for the Radio, Television and Electronic industries.

Amalgam 'Resinact' Cored Solder with specially activated resin flux, to specification DTD 599, and B.S.441.

Amalgam P.C. Alloys for dip-tinning printed circuits (free service for checking analyses of metal in customers' baths).

Amalgam Fusible Alloys, made in all forms, for all uses. Fully approved A.I.D., C.I.A., G.P.O., I.R.C.S.C. and M.O.S.



GREY & MARTEN LIMITED

City Lead Works, Southwark Bridge, London, S.E.1. Tel: HOP 0414
and at Birmingham, Manchester and Ipswich

WEYRAD P.50 TRANSISTOR COILS AND I.F. TRANSFORMERS

FOR 2-WAVE PORTABLE WITH PRINTED CIRCUIT AND ROD AERIAL



P50/1AC M.W. OSCILLATOR COILS. For 176pF TUNING CONDENSER PRICE **5/4d.**

P50/2CC 1st and 2nd I.F. TRANSFORMER. 470 Kc/s OPERATION. "Q" = 150 PRICE **5/7d.**

P50/3CC 3rd I.F. TRANSFORMER. 470 Kc/s OPERATION. "Q" = 170 PRICE **6/0d.**

RA2W L.W. and M.W. ROD AERIAL 6in. long, flying-lead connections. For 208pF TUNING CONDENSER..... PRICE **12/6d.**

LFTD2 DRIVER TRANSFORMER. Split Secondary Type, semi-shrouded. With 6 connecting tags PRICE **9/6d.**

PCAI PRINTED CIRCUIT PANEL, 2½ x 8½ in. ready drilled with component positions and references printed on rear PRICE **9/6d.**

BOOKLET OF DETAILED ASSEMBLY INSTRUCTIONS AND CIRCUIT DIAGRAMS FOR 6-TRANSISTOR LONG AND MEDIUM WAVE SUPERHET PRICE **2/0d.**

ALL IN BULK PRODUCTION—TRADE ENQUIRIES INVITED

**WEYMOUTH RADIO MFG. CO. LTD., CRESCENT STREET,
WEYMOUTH, DORSET**

"What the PEOPLE say . . .

The sensational **STEREOPHONER** has met with an enthusiastic reception from audio enthusiasts and professional engineers. Extracts from a few of their letters are given—the originals can of course be inspected at our Offices.



STEREOPHONER

... gives all the realism and presence of stereo sound FROM ANY MONAURAL SOURCE—HI-FI AMPLIFIER, TAPE RECORDER, RADIO—RADIOGRAM. Satisfaction guaranteed.

Price only **£4:19:6**
Plus postage 2/6
Overseas **£5:10:0** or **\$16**
Post paid

We can supply direct by post to all parts of the world.

Send for your **Stereophoner NOW** (delivery from stock) or write for free illustrated folder. Demonstrated daily 9 a.m. to 6 p.m., Monday to Saturday inclusive. **TRADE ENQUIRIES INVITED.**

"... The general effect is to really bring the performers right into the room in a most exciting manner and in a way I have never experienced before.

"Listening either to radio or gramophone without this apparatus is now unthinkable in my household as the

performance by the old methods now seems absolutely flat and lifeless after using the 'Stereophoner.'

"Words must fail in trying to describe results, however, and I can only conclude by saying they are 'amazing.'"

"... The results are really excellent... Would you also let me have the various brochures that you have about this as another of my friends is very interested."

"... I am delighted with the results obtained from using the 'Symphony Stereophoner' on my own equipment, and have decided to buy another for use in connection with a music group I am responsible for organising at the local Y.M.C.A."

"... I have now given this instrument what I consider to be a fair test, by playing some very early LP records, and I must admit that I was somewhat startled at the difference the 'Stereophoner' makes. My first impression was that a film had been lifted from the surface of the record. The high soprano notes of artists such as Madame Callas and Madame Tebaldi came out with ringing clarity, whilst the deep bass notes a vibration was felt within the room itself. Truly, a remarkable little instrument."

"... I must say that I am highly pleased with the results. I shall certainly broadcast the claims of your 'Stereophoner.' It certainly does all it claims to do and the results are truly astonishing. There is no 'hole in the middle'—and it excels everything I've heard from what they call 'true stereo' (with its two amplifiers, two speakers and stereo pickup). The 'Stereophoner' gives one stereo for a fraction of the cost."

"... It is an amazing little box of tricks and I am delighted with the results. My 'hook-up' (as I told you) was very efficient before—now, with this addition it is all that one could desire and the reproduction from radio, tape and records really excellent. I must admit I was a bit sceptical but your advertisement is justified by the efficiency of the magic box!"


"... I must say that I am very pleased with its effects, it certainly gives depth and one cannot pin-point the emission of sound as coming from one speaker or the other."

"... A friend of mine recently purchased one and is astounded at the improvement in the quality of the sound from both his tape recorder and record player."

NORTHERN RADIO SERVICES
11, King's College Road, Swiss Cottage, N.W.3. Telephone: PR11mrose 3314

Worldwide Export Service **ELECTRONIC** EQUIPMENT FROM U.S.A.

Frazar & Hansen Ltd., internationally known since 1834, presents the latest advancements in electronics designed and engineered by leading U.S.A. manufacturers: many microwave and transistorized devices, components and complete equipment. A number of these are designed to meet military specifications.



Radioactivity Monitor

Model AM-5C Continuous Air Monitor. Utilizes the natural radioactive content of air to determine the presence of foreign alpha or beta-gamma emitters encountered in the laboratory, reactor stack or in the field. Sounds alarm when significant amounts of foreign activity are detected.

EBERLINE INSTRUMENT CORP.

Line Fault Analyzer

Model 124A Line Fault Analyzer designed for rapid location of faults on transmission lines. Instantly pinpoints shorts, opens, grounds, and indicates nature of fault from $\frac{1}{2}$ to 200 miles. Also available—carrier frequency voltmeters, wave analyzers, specialized LF, HF, VHF, UHF test equipment, RF transmitters and power measuring equipment.



SIERRA ELECTRONIC CORP.

Also aluminum microwave and relay towers, AM transmitters, audio equipment. Digital voltmeters and data printers. High speed pulse generators. Signal generators. Spectrum analyzers, transistorized power supplies.

Distributors Wanted

Overseas inquiries invited from electronic engineering representatives and manufacturers

FRAZAR & HANSEN Ltd.

301 Clay Street • San Francisco 11, Calif.

Since 1834

the

3rd

international exhibition of electronic components

IN PARIS
FROM FEBRUARY
19th. to 23rd.
1960

All manufacturers throughout the world will be showing their latest achievements.

Apply for your exhibitor's file NOW. It will give you all the information you need in connection with your participation.

FÉDÉRATION NATIONALE DES INDUSTRIES ÉLECTRONIQUES

23, rue de Lübeck - PARIS 16^e - Tél. : PAS. 01-16



AN EXCELLENT RANGE OF MOULDINGS FROM STOCK

Embellished types for
domestic equipment

Instrument types for
modern apparatus

WE ARE ACTUAL IMPORTERS of the popular "Pekalt" range and maintain adequate stocks of the more widely used patterns

UNCLES BLISS & CO., LTD.
CHERRY ORCHARD RD, EAST CROYDON, SURREY
TELEPHONE: CROYDON 3379/6390

New!

R.F. BRIDGE

★ frequency range: 15 Kc/s to 15 Mc/s

★ directly calibrated

MEASURES:—

- L..... 0.5 μ H to 100 mH
- R..... 10 ohms to 10 megohms
- C..... 0.01 pf to 25,000 pf

TYPE LE 300

As admittances to an accuracy of 1% over the major part of measurement range.

Also :-

measures any three terminal network. Adaptors, available shortly, will enable most transistor parameters to be measured.



PRICE **£120** Delivery ex-stock

Send for detailed leaflet

Hatfield Instruments Ltd.

Crawley Road, Horsham, Sussex.

Horsham 3232-3

WE SEND THE BEST OF BRITAIN'S HI-FI EVERYWHERE

EVERYTHING FOR RADIO, RECORD & TAPE

- PROMPT DESPATCH SERVICE
- HOME AND EXPORT ENQUIRIES WELCOMED AT ALL TIMES
- 110 VOLT ITEMS AVAILABLE

★ RECORDERS

Vortexion W.V.A.	£93 13 0	\$267
Vortexion W.V.B.	£110 3 0	\$315
Brenell Mk. V	64 gns.	\$192
Ferrograph 4AN	81 gns.	\$243
Ferrograph 4AH	86 gns.	\$258
Ferrograph 66N	84 gns.	\$252
Grundig TK20 with Mic.	52 gns.	\$156
Grundig TK30	72 gns.	\$216
Telefunken KL85K	79 gns.	\$227
Philips 8108G	62 gns.	\$196
Philips EL3527	39 gns.	\$87
Stuzzi Transistor	69 gns.	\$207

★ STEREO DECKS

Ferrograph Stereo-Ad	30 gns.	\$90
Ferrograph 88	105 gns.	\$315
Ferrograph 4 S/N	89 gns.	\$267
Brenell Stereo Deck	£33 16 0	\$101

★ STANDARD DECKS

Wearite 3A	£35 0 0	\$100
Wearite 3B	£40 0 0	\$114
Ferrograph 28	28 gns.	\$84
Truvoc	26 gns.	\$78
Collaro Mk. IV	£25 0 0	\$72

Microphones by Lustraphone, Reslo, Acos, Simon Sound, Geloso, etc.

★ TAPES BY ALL LEADING MAKERS

★ SPEAKER SYSTEMS

Quad Electrostatic	£52 0 0	\$156
Wharfedale SFB/3	£39 10 0	\$113
Wharfedale PST8	£10 10 0	\$25
Wharfedale Golden 10	£8 14 11	\$18
Wharfedale Super 3	£6 19 11	\$16
Tannoy 12in. Dual	£30 15 0	\$91
Tannoy 15in. Dual	£37 10 0	\$107
Vitavox DU/120	£19 10 0	\$56
WB. 1016	£8 0 0	\$16
WB. 1012	£4 19 9	\$22
Goodmans Tri Axiette	£25 0 0	\$71
Goodmans 300	£11 5 9	\$32
Goodmans 400	£16 17 0	\$46
Goodmans 15/4	£53 11 0	\$156
Goodmans 1B3	£59 17 0	\$171
Philips Dual Cone	£10 10 0	\$30
Kelly Ribbon Mk. II	£10 10 0	\$30
B. J. Tweeter complete	£5 5 0	\$11
WB. 1016	£8 0 0	\$18

★ MOTORS AND PICK-UPS

Lenco GL60 Trans. Unit	£28 19 2	\$62
Lenco GL58/R and Stereo P.U.	£29 3 10	\$62
Garrard 301	£26 8 3	\$54
Garrard 4HF/Stereo P.U.	£19 17 7	\$41
Garrard TA/Mk. II	£9 15 8	\$22
Connoisseur Motor	£28 6 3	\$57
Philips P.U.	19 gns.	\$41
Goldring 600	£11 13 6	\$24
Goldring 580	£5 16 9	\$12
Garrard Arm and P.U.	£14 3 3	\$29

ORTOFON, LEAK, CONNOISSEUR, COLLARO, etc. Also available Garrard Collaro and BSR Auto-changers with stereo or mono pick-ups.

★ AMPLIFIERS & TUNERS

(STEREO)

Quad 22-Control Unit	£25 0 0	\$76
Quad II Amplifier	£22 10 0	\$64
Leak Stereo 20 Amp.	£30 9 0	\$87
Leak Point One Pre-Amp	£21 0 0	\$60
Avantic SPA II	£29 8 0	\$84
Pamphonic 3000	£31 10 0	\$90
Rogers Control Unit	£18 10 0	\$53
C.Q. Twin Four	21 gns.	\$63
Pilot J2/10 Mk. II	£37 10 0	\$110
Dulci DPA/10/2	24 gns.	\$72

(SINGLE CHANNEL)

Leak TL12 Plus	£18 18 0	\$54
Quad II Amplifier	£22 10 0	\$64
Quad Control Unit	£19 10 0	\$56
Rogers Cadet	10 gns.	\$30
Rogers Junior	£17 0 0	\$49
Rogers Pre-Amp	£8 0 0	\$23
Rogers Switched FM Tuner	£15 17 2	\$33
Quad FM Tuner	29 gns.	\$60
Chapman AM/FM	£29 8 0	\$60
Jason JTV Tuner	£25 17 3	\$55
Dulci AM/FM	£24 19 0	\$60

★ STEREO PICK-UPS

Ortofon Head	£33 14 0	\$69
Ortofon Arm	£14 0 11	\$37
Decca	£22 0 0	\$45
Elac Stereo twin Cartridge	£19 17 7	\$40
Ronette	£3 9 6	\$10
Ronette DC284	£4 3 5	\$9

Prices quoted are based on latest information available at time of going to press. Enquiries for new items by firms mentioned in this advertisement invited.


We carry extensive and up-to-date stocks of equipment, components and accessories by Britain's leading makers. Enquiries dealt with by return.

164 CHARING CROSS ROAD, LONDON, W.C.2

(3 shops from Tottenham Court Road Station Underground)
Tel.: TEM 7587 & COV 1703. Cables: MODCHAREX, LONDON

MODERN ELECTRICS (RETAIL) LTD.

If it's Electronic
and you want it
Designed and Developed or produced*
to your specification

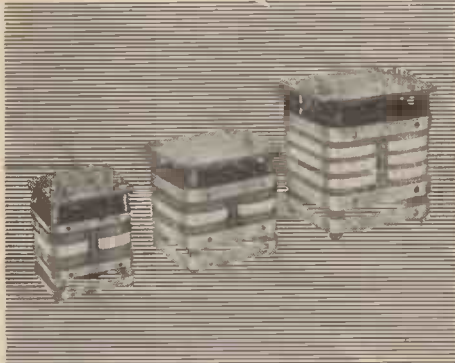

These open type C core chokes and transformers are further examples of the wide range of transformers we design and make in quantity to individual customer's requirements.

Consult

TYER

(formerly P.A.M. Ltd.)

Tyer & Co. Ltd. Electronics division combines the technique of several companies, long-established in the Electronic field, with the extensive modern production resources of Tyer & Co. Ltd. Examples of recent work are illustrated.



A fully transistorised Portable Holiday Detector designed by Tyer & Co. Ltd. for Cathodic Corrosion Control Ltd. It provides a non-lethal output voltage up to 20 K.V. D.C., and is used for detecting cracks or imperfections in protective coatings applied to metal structures.

** Whichever stage of the struggle you've reached, we can save you time and trouble—maybe money too—write or 'phone without delay.*



T Y E R & C O M P A N Y L T D

PERRAM WORKS, MERROW SIDING, GUILDFORD, SURREY Telephone Guildford 2211

A member of the Southern Areas Electric Corporation Group

THE WORLD'S GREATEST BOOKSHOP

FOYLES
★ ★ FOR BOOKS ★ ★

FOR ALL YOUR TECHNICAL BOOKS

'A bookshop such as booklovers dream of. There is no other bookshop, anywhere, to compare with Foyles.'


—A Customer's Letter.

119-125 CHARING CROSS ROAD, LONDON, W.C.2

Gerrard 3660 (20 lines) ★ Open 9-6 (Thurs. 9-7)

Nearest Station: Tottenham Court Road

A. C. SOLENOID TYPE SBM



Continuous 3½ lbs. at 1"
Instantaneous to 16 lbs.

Smaller sizes available

Also—Transformers to
7 kVA 3 phase

Current Transformers
100/5 to 2000/5

All Classes.

R. A. WEBBER LTD.

18 FOREST ROAD, KINGSWOOD, BRISTOL. PHONE 67-4065



For Safety's Sake
use **AVO Prodclips**

Patent No. 748811

Safety first every time with these patented spring-loaded AVO Prodclips.

Cleverly designed for use as insulated prods, they are invaluable for reaching and holding test points which are difficult of access.

Post Free **15/-** per pair

AVO LTD

AVOGET HOUSE · 92-96 VAUXHALL
BRIDGE ROAD, LONDON, S.W.1.

Victoria 3404 (12 lines).

... with Trigger-Action
Spring-Loaded Clips

PRESS TRIGGER
TO OPEN


RELEASE TO GRIP

Actual size
of magnet

M.17

MUREX sintered permanent MAGNETS

are used in this NEW B.P.L Meter

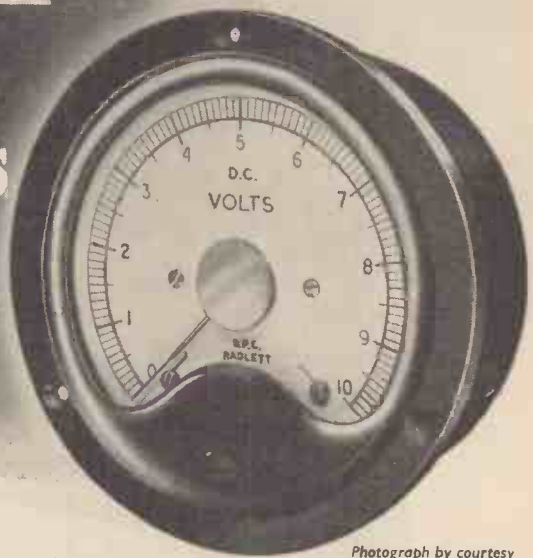

Photograph by courtesy
of B.P.L. (Instruments)Ltd.

The high flux density and magnetic stability which are characteristic of Murex Sintered Permanent Magnets are essential for the high performance of this instrument.

MUREX LIMITED (Powder Metallurgy Division) **RAINHAM, ESSEX.**
Telephone: Rainham, Essex 3322 Telex 28632. Telegrams: Murex, Rainham-Dagenham Telex.
London Sales Office: CENTRAL HOUSE, UPPER WOBURN PLACE, LONDON, W.C.1. **EUSton 8265**

TAKE YOUR PICK

Our wide range of capacitors, incorporating all the latest developments, are described fully in these new leaflets . . .

SEND NOW for COPIES

DALY has succeeded in maintaining full capacity values and working voltages in more compact designs, specially suited to ultra modern equipment :—

- PHOTO-FLASH EQUIPMENT • DEAF AIDS
- PRIVATE TELEPHONE INSTALLATIONS
- AMPLIFIERS • D.C. POWER UNITS
- TRANSISTOR EQUIPMENT
- MAGNETISATION EQUIPMENT
- TEST GEAR

DALY ELECTROLYTIC CAPACITORS

Condenser Specialists for over 20 years.

DALY (Condensers) LTD., WEST LODGE WORKS,
THE GREEN, EALING, LONDON, W.5. Phone: Ealing 3127-8-9. Cables: Dalcyon, London



HETERODYNE FREQUENCY METERS

BRITISH MANUFACTURED

Designed and built to rigid services specifications.

TYPE T75
Frequency Range: 85 to 1,000 megacycles.

TYPE T74.
Frequency range: 20 to 250 megacycles.

Frequency calibration accuracy: .002% at 25°C. (or .01% between -20°C. to +70°C.).

Crystal-controlled, portable heterodyne-type Frequency Meters used for Field testing and measurement of pulsed, modulated, or C.W.R.F. transmitters, receivers and signal-generators.

Mains Operated Power Unit available as optional extra and designed to fit into the battery compartment.

Reconditioned and calibration-checked B.C.221 Frequency Meters, range 125 Kc/s to 20 Mc/s, still available.

Provisional specifications on a new wide-range, very high accuracy Frequency Meter and also an instrument covering the range 100 Kc/s to 1,000 Mc/s (higher under favourable conditions) available on request.



INSTRUMENT

Complete Specifications on application to:—

Sole Manufacturers **TELEMECHANICS LTD**
(Instrument Division Dept. W.W.8)

SHORE ROAD, HYTHE, SOUTHAMPTON, ENGLAND.

Telephone: Hythe, Hants 3376

Cables: 'Teleset', Hythe, Southampton.

Agents: Some overseas territories still available.

Makers of High Voltage Test Sets and other Electronic Equipment for H.M. Government.

WAFER SWITCHES TO SPECIFICATION

As we specialise only in the manufacture of small quantities of wafer switches (to individual specification) we guarantee competitive prices and fast delivery.

SWITCHES TO PUBLISHED DESIGNS (FROM STOCK)

G.E.C. 912-PLUS	Mullard Tape Amplifiers
S1 (14061/B1) } 14/6 pair	Amplifier "A"
S2 (14062/B1) } 32/6 the set	SS/567/A
S4 (SS/556/1) ... 11/6	SS/567/B
S5 (SS/556/2) ... 10/6	SS/567/C
	Amplifier "B"
	SS/567/A 16/6

Write for Price List and Design Chart.

SPECIALIST SWITCHES

23 Radnor Mews - Sussex Place
London W2 - PADDINGTON 8866/7

Suppliers to the leading electronics, aeronautical and automobile companies and to research institutions, the G.P.O. and Universities.

TRANSFORMERS

COILS

LARGE OR SMALL QUANTITIES

CHOKES

TRADE ENQUIRIES WELCOMED

SPECIALISTS IN

FINE WIRE WINDINGS

MINIATURE TRANSFORMERS, PICK-UP, CLOCK AND INSTRUMENT COILS, ETC. VACUUM IMPREGNATION TO APPROVED STANDARDS

ELECTRO-WINDS LTD.

CONTRACTORS TO G.P.O., M.O.S., L.E.B., ETC.


123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY
LIVINGSTONE 2261 EST. 1933

INSTRUMENT WIRES

AND INSULATING MATERIALS

ENAMELLED, SILK AND COTTON covered Copper Wires, Single or Stranded, also Tinned, Paper, Asbestos and Plastic Westoflex covered RESISTANCE WIRES, LITZ WIRES.

MICA, MICANITE and BAKELITE in all forms. Heat Resisting Boards. Canvasite for Silent Gears. Oil Cloth, Silk and Paper. Slot Insulations. Insulating Varnishes. Varnished Fabric and Plastic Sleeving. Moulded and Machined Pieces, etc.



WEST INSULATING COMPANY LTD.

2 Abbey Orchard Street, Westminster, S.W.1.

Telephone: Abbey 2814 & 7352



They know...

that all their equipment is
the best possible.

Naturally they have
fitted a Garrard

Garrard is the soundest
name in Sound

Reproduction.



*For forty years the finest record
playing equipment in the world.*

THE GARRARD ENGINEERING
AND MANUFACTURING CO. LTD.
SWINDON · WILTSHIRE




Relay Trouble · Relay Trouble · Relay Trouble



We'll just have to call in the KEYSWITCH CO.

Why try improvising when we can supply relays adapted for A.C. operations - Mercury Switch Control - Multiple Contacts - Special Control Devices - Electrical or Mechanical Latching Micro-Switch operation - Photo-Electric or Transistor Controlled Switching, or combinations of above.

A customer proved
36 contacts
Magnetic
Relay,
now being used
in current
production

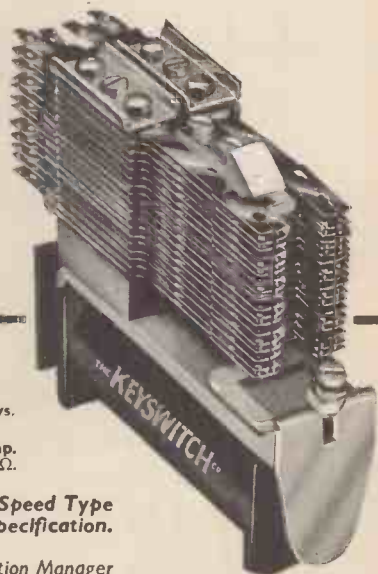

Enormous range of
3,000 P.O. Type Relays.
CONTACTS:
300 m/A to 8 amp.
COILS: Up to 100,000Ω.

P.O. 600 and High-Speed Type
Relays. Built to Specification.

Enquiries to : Production Manager

THE KEYSWITCH CO.

2 Irongate Wharf Road, Praed Street, London, W.2
Tel. PADDington 2231

Contractors to Home and Overseas Governments and H.M. Crown Agents

STEREO IN STOCK

ACOUSTICAL "QUAD 22"
 CHAPMAN STEREO 305
 LEAK "POINT ONE" STEREO
 PYE HS20 STEREO
 etc., etc.

HIGH FIDELITY SPEAKER SYSTEMS

FULL RANGE OF THE BEST HI-FI
 SPEAKER SYSTEMS INCLUDING THE
GOODMANS A.L/120
 AS DESCRIBED ON PAGE 70

THE PYE MOZART FM TUNER



incorporating a push-button on-off control and built-in power pack. It gives good reception up to 30 miles (indoor aerial) and 80 miles (outdoor aerial). Features include: Automatic Frequency Control; Twin Limiters. Frequency response: 20-20,000 c.p.s. In expanded metal case or chassis form. Model HFT108M £24. Model HFT108 (Chassis) £22.

40-Page FULLY ILLUSTRATED CATALOGUE of Electronic and Hi-Fi Stereo and Monaural Equipment 6d., POST FREE.

"Q-MAX" SHEET METAL PUNCHES



ROUND, SQUARE and RECTANGULAR
LATEST ADDITIONS

The easiest and quickest way of punching holes in SHEET METAL.

1 1/16 in. square 27/6

2 1/32 in. x 1 5/16 in. rectangular 35/-

LIST OF SIZES AND PRICES ON APPLICATION.

SOLE LONDON DISTRIBUTORS OF
ELCOM



MINIATURE MULTI-WAY

PLUGS and SOCKETS

2, 4, 6, 8, 12, 18,
 24 and 33 WAY

(Trade Discounts for Quantities)

BERRY'S RADIO

25 HIGH HOLBORN, LONDON, W.C.1

Telephone: HOLborn 6231-2
 (OPPOSITE CHANCERY LANE)

Send us your enquiries for all types of QUARTZ CRYSTALS

for:

RADIO FREQUENCY CONTROL
 FILTER PURPOSES
 ULTRASONIC PURPOSES

METALLIZED TO SUIT REQUIREMENTS.
 ANY SHAPE AND SIZE CUT TO SPECIFICATION.

PIEZO LIMITED

26 St. Albans Rd., Watford, Herts. Tel: Watford 27808

VITREOUS ENAMELLED RESISTORS

R.C.S.C. Style RWV4-L

FULLY R.C.S.C. TYPE APPROVED, 10Ω to 22KΩ, our RWV4-L style resistors conform to Inter-Services Spec. RCS III.

Other styles available. R.C.S.C. type approval applied for.

RCSC Style	CGS Style	Rating in watts		Range
		Service	Commercial	
RWV4-J	VPF4	3	4	5Ω to 8KΩ
RWV4-K	VPF10	4.5	10	5Ω to 68KΩ
RWV4-L	VPF14	6	14	10Ω to 100KΩ

THE C.G.S. RESISTANCE CO.
 EVERTON, LYMINGTON, HANTS. Tel. Milford-on-Sea 269
 London Office: 30 Clarendon Rd., Harrow, Middx. Tel. Harrow 4147

TELEVISION AERIAL COMPONENTS DESIGNED FOR CONSTRUCTING BAND I & BAND III T.V. AERIALS ELEMENT DIMENSIONS SUPPLIED FOR ALL CHANNELS

Selecting at random from our new multi-page catalogue :

- ★ Band III Folded Dipoles (As illustrated)
- ★ Reflector and director rod holders
- ★ Masthead Fittings for 3/4", 1", 1 1/2" and 2" Masts.
- ★ Mast Coupling units for 2" Masts.
- ★ Insulators, Both Rubber and Plastic (As illustrated)
- ★ Alloy Tubing for Elements, Cross boom and masting.

Send 1/- P.O. for the revised, fully illustrated catalogue to:

FRINGEVISION LTD., Marlborough, Wilts.


Phone: 657/8



The
Superspeed
Soldering Iron
heats up from cold
in **6** seconds

Designed on an entirely new principle, this light-weight, versatile iron is eminently suitable for soldering operations in the radio, television, electronic and telecommunication industries. For test bench and maintenance work it is by far the most efficient and economical soldering iron ever designed.

- * Activated by light thumb pressure on the switch ring. When pressure is released, current is automatically switched off—thus greatly reducing electricity consumption, wear on copper bit and carbon element.
- * Can be used on 2.5 to 6.3 volt supply (4 volt transformer normally supplied) or from a car battery.
- * More powerful than conventional 150-watt irons; equally suitable for light wiring work or heavy soldering on chassis.
- * Simple to operate; ideal for precision work.
- * Requires minimum maintenance—at negligible cost: shows lowest operating costs over a period.

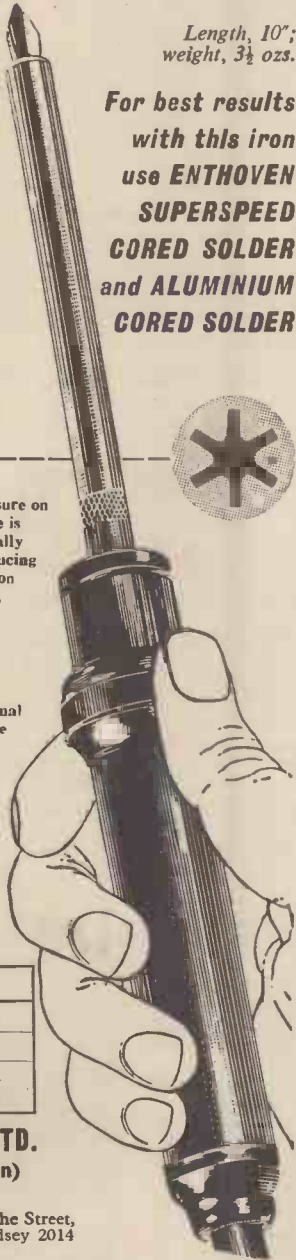

Length, 10"; weight, 3½ ozs.

For best results with this iron use **ENTHOVEN SUPERSPEED CORED SOLDER and ALUMINIUM CORED SOLDER**

LIST PRICES	
IRON	39/6
TRANSFORMER	35/6
All prices and trade discounts subject to revision	

ENTHOVEN SOLDERS LTD.
(Industrial Equipment Division)

Sales Office & Works:
Upper Ordnance Wharf, Rotherhithe Street,
London, S.E.16. Tel.: BERmondsey 2014

Head Office:
Dominion Buildings, South Place, London, E.C.2. Tel.: MONarch 0391

**STEREO SOUND
SUPREME BY**

Connoisseur

THE RESULT OF FOUR YEARS' PROGRESSIVE DEVELOPMENT

THE STEREO PICKUP

for playing 45/45 records. Miniature ceramic type with replaceable diamond stylus. Constant velocity output approximately 20mV from each channel. Frequency range 20 to 16,000 cycles. Channel separation 20/25 dbs.

(Complete as illus.)£12/19/10
Head only.....£7/19/11
Arm only.....£4/19/11
(inc. tax)

STEREOPHONIC AMPLIFIER AND PRE-AMPLIFIER

Twin channel amplifier and pre-amplifier for reproducing monaural and stereophonic sound from disc, radio and compensated tape. Ultra linear push/pull output giving 7.5 watts peak from each channel.

Amplifier £24 . 10 . 0
Pre-amp. £16 . 10 . 0

BRAND NEW 2 SPEED STEREO TRANSCRIPTION MOTOR

Operates at 33½ and 45 r.p.m. Full 12in. turntable.

£16 . 13 . 1
(inc. tax.)

VARIABLE 3 SPEED MOTOR TYPE B (illustrated)

Operates at 33½, 45 and 78 r.p.m. Non-ferrous turntable. Built-in large stroboscope with internal light source. Precision ground and lapped spindles. Adjustable nylon graphite bearings. Synchronous motor.

£27 . 16 . 1
(inc. tax)


A. R. SUGDEN & Co. (Engineers) Ltd.

Market Street, Brighouse, Yorks.

Telephone 2142



Another **CHANNEL**
MINIATURE INSTRUMENT
Dimensions only 4½" x 3½"

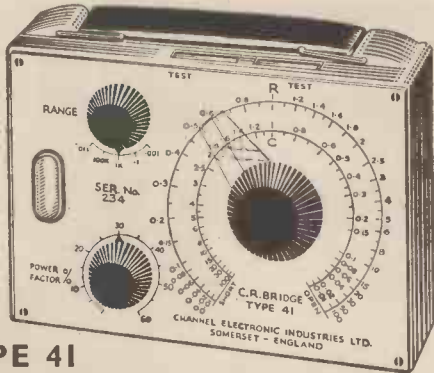

TYPE 41
TRANSISTORIZED RESISTANCE-CAPACITY BRIDGE
NET PRICE **£5.10.0** POST PAID

BATTERY 3/3 EXTRA CASH WITH ORDER OR C.O.D.

- ★ Magic Eye Null Indicator
- ★ Resistance Ranges 5Ω to 20 MΩ
- ★ Capacity Ranges 5 μF to 20 μF
- ★ Sharp Positive Null Indications
- ★ Calibrated Power Factor Check
- ★ Fits your Pocket. Completely portable.
- ★ **TRADE AND EXPORT ENQUIRIES INVITED** ★

Write for descriptive leaflet, or order today from —

CHANNEL ELECTRONIC INDUSTRIES LTD.
INSTRUMENTS DIVISION
DUNSTAN ROAD BURNHAM-ON-SEA SOMERSET Phone 3167

**TRANSISTORISED
POWER
AMPLIFIERS**

PORTABLE, MOBILE, MAINS

FOR ALL RADIO, AMPLIFIER &
SOUND INSTALLATIONS


ENQUIRIES: —

Audix


STANSTED, ESSEX.



STANSTED 3132



FACTS ON THE
Replacements
SERVICE



**SPECIALISTS IN
TIME BASE COMPONENTS**
Direct TV Replacements do not just supply Time Base Components, but manufacture and design Time Base Transformers. Improvements introduced by Direct TV Replacements have in some cases resulted in set makers advising customers to purchase from our company or in the set maker using our Transformers.

CONTINUITY OF SUPPLIES
Direct TV Replacements, with their intimate knowledge of the trade and working in very close co-operation with the majority of set manufacturers, are very often able to foresee if there is likely to be a shortage of any particular Time Base Component, and they quickly make arrangements, in order to maintain continuity of supplies.

SAVING TIME AND MONEY
Direct TV Replacements save the expense of sending a number of orders to various manufacturers and then very often finding that they are no longer producing the component. You will save money by ordering **ALL YOUR TV COMPONENTS FROM DTU.**

**ROUND THE CLOCK AND
ROUND THE YEAR SERVICE**
Direct TV Replacements were the first television component company to provide dealers with an Ipsophone automatic telephone answering service. If an engineer is working on a job late in the evening, he can telephone TIDeway 6668 and place orders for any television components, valves or cathode ray tubes that he may require. Whilst most set manufacturers are closed for holidays, Direct TV Replacements, by means of staggered holidays, maintain an excellent round-the-year service. Orders placed before 3 p.m. are despatched on the same day.

UP TO DATE METHODS
It is only by employing the most modern techniques in office procedure that Direct TV Replacements can maintain an efficient service on well over 6,000 different components. By means of a micro filmer, any order can be very rapidly traced and queries immediately settled.

The largest stock of
TV components in Great Britain

138 LEWISHAM WAY, NEW CROSS, S.E.14.
Telephone: TIDeway 6666 Ipsophone: TIDeway 6668



½" CAPACITY 15" BENCH DRILL
A PRECISION BUILT MACHINE TOOL
WEIGHT 154 lbs. 5 SPINDLE SPEEDS

£37-5-0 complete - 3 phase
(Chuck guard not included.) Pillar model also available.
Available from all machine tool merchants -
write now for full details, to the manufacturers:

W. J. MEDDINGS LTD.,
Ipswich Road, Trading Estate, Slough, Bucks
One of the largest manufacturers of Drilling Machines in the U.K.



LOUDSPEAKER UNITS



Model 121 12" HD UNIT
Dia. over lugs 12in.; Overall depth 8½in. Power handling 30 watts R.M.S.; Voice coil dia. 2in.; Flux density 12,000 gauss; Total flux 160,000 lines; Main resonance 30/35 c.p.s.; Frequency response 25-5,000 c.p.s.; Input impedance 15 ohms.
Fitted with curvilinear cone, foam plastic surround and extra long voice coil winding which permits large amplitude movements without harmonic distortion. Recommended for use as single speaker for any heavy duty requirement such as public address or home cinema or as bass unit in multi-speaker system. Suitable for use in all types of reflex enclosure horn loading or open baffle mounting. £9.

Model 121 A
As above but with aluminium wire voice coil giving improved transient response and useful range extended up to 10,000 c.p.s. 9 gms.


Not subject to Purchase Tax
(Carriage paid in U.K.)
Illustrated leaflet available.

Model 301 H.F. UNIT
Overall dia. 3in.; Overall depth 1½in.; Power handling 15 watts; Instantaneous Peak; Voice coil dia. 1in.; Flux density 17,000 gauss; Frequency response 1,500-18,000 c.p.s.; Input impedance 8-15 ohms.
A pressure type high frequency loudspeaker. Handles high note portion of 15 watts of music. Response is level over range 2,000 to 14,000 c.p.s. beyond which there is gradual roll-off giving useful range of 1,500 to 18,000 c.p.s. The special hardened aluminium diaphragm with unique loading system gives clean distortionless output at all frequencies in its range which is completely free of resonances or colorations. Will extend range of any existing speaker system and greatly increase transient response and "realism." £3/15/-



Not subject to Purchase Tax
(Carriage paid in U.K.)
Illustrated leaflet available.

FANE ACOUSTICS LIMITED
BATLEY YORKSHIRE

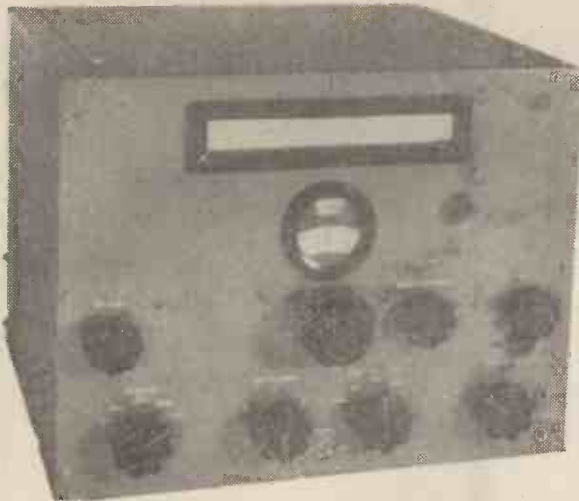

COMMUNICATIONS RECEIVER B28 (MARCONI CR100)

PRICE—ONLY £21

Later Model with Noise Suppressor £25

Carriage England and Wales 30/- Send S.A.E. for further details.

COMMUNICATIONS RECEIVERS R-1155B

A first class 10 valve Communication and D/F receiver, covering 75 Kc/s. to 18 Mc/s. (16.2-4,000 m.) in 5 bands. The large scale and superior dual ratio slow-motion drive make tuning easy, and the R.F. stage and 2 I.F. stages ensure world-wide reception. ALL the receivers we sell have been thoroughly overhauled and completely re-aligned, and are in first class order. ONLY £7/19/6.

ALSO available, R-1155-N as above, but has 1.5 to 3 Mc/s. (100-200 m.) in place of the 75-200 Kc/s. band. ONLY £12/19/6.

A.C. MAINS POWER PACK OUTPUT STAGE

In handsome black-cracked steel cabinet to match the R-1155. Fitted with 8in. speaker. Just PLUG IN and switch on! Only the finest quality components are used, and we guarantee OUR power packs for 6 months. ONLY £6/10/-. Deduct 10/- when purchasing receiver and power unit together. Send S.A.E. for further details, or 1/3 for 14 page illustrated booklet giving technical data and circuits etc. (FREE with each receiver.) Add 10/6 carriage for receiver, 5/- for power unit.


HALLICRAFTER SX-24 RECEIVERS

Covers from 540 Kc/s. to 44 Mc/s. in 5 bands. With separate bandspread tuning, variable selectivity crystal filter, B.F.O., "S" meter, noise limiter etc. For 117-230v. A.C. mains. In perfect working order and first class condition. £25. Carr. 10/-.

RCA AR-88 SPEAKERS

A high quality 3 ohm unit fitted into heavy gauge black cracked steel cabinet, size 10½ x 11½ x 6in. Fitted with rubber feet and 6ft. lead. Ideal for extension speaker, CR100, etc. In original cartons, BRAND NEW. 45/- Post 3/6.

AR-88. D AND LF. SUPERB CONDITION. NOW IN STOCK.



Q'Ser (BC-453)

This Command Receiver covers 190-550 Kc/s. (I.F. 85 Kc/s.) and is ideal for double superhet conversion etc. Supplied BRAND NEW in original cartons, with all 6 valves and CIRCUIT. 89/6. Post 3/6.

MARCONI VALVE VOLTMETERS

Ranges: 0 to 1.5, 5, 15, 50, and 150 volts. Fitted with probe unit for RF measurements. A.C. mains operation. In good condition and working order. A laboratory instrument for ONLY 60/19/6. Carr. 7/6.




CRYSTAL CALIBRATOR

No. 10. Consists of 500 Kc/s. crystal oscillator and a variable 250-500 Kc/s. heterodyne oscillator. This enables all intermediate frequencies between 500 Kc/s. and 10 Mc/s. to be produced. These frequencies are indicated on the calibrated scale. The calibrator may actually be used up to 30 Mc/s. The unit uses a CV-286 neon modulator, 1T4 crystal osc., 1T4 het. osc., and IR5 mixer. Operates from 300 v. 15 m/a., and 12 v. 0.3 A., but can be easily modified for 120 v. and 1.4 v. working. Size 7x7½x4in. In first class condition, complete with valves, crystal, instruction manual and circuit. One of our "best buys" at ONLY 59/6. Post 3/6.



RCA HF SWEEP GENERATORS

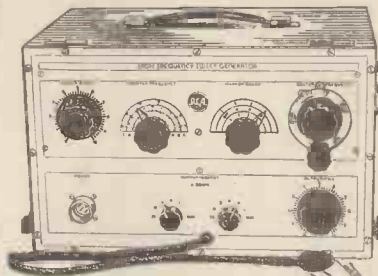

Laboratory type equipment designed for alignment of wide band RF and IF amplifiers. Comprises generator and regulated power supply unit each housed in grey cracked steel case 17 x 10 x 12in. Centre Frequency 5-65 Mc/s. Sweep width 0.2-20 Mc/s. Marker oscillator frequency 5-70 Mc/s. Operates from 105-125/210-230 v. A.C. Mains. Complete

with 13 valves and Technical handbook. BRAND NEW condition. £39/10/- Carr. 10/-.

RCP 20 RANGE TESTMETERS

- 1,000 ohms per volt, 400 micro-amp basic movement.
- D.C. VOLTS A.C. VOLTS
- 2.5 v. 2.5 v.
- 10 v. 10 v.
- 50 v. 50 v.
- 250 v. 250 v.
- 1,000 v. 1,000 v.
- 5,000 v. 5,000 v.
- D.C. CURRENT RESISTANCE
- 1 am. 500 ohms
- 10 ma. 100k. ohms
- 100 ma. 1 megohm
- 1 amp. DECIBELS
- 10 to +69



In light oak case 6½ x 6 x 4½in., including lid. Complete with test leads and prods, internal battery, and instructions manual. ALL BRAND NEW and tested. Post 2/6.

LIMITED NUMBER 79/6.

DECADE RESISTANCE BOXES. Type 750L. Manufactured by Daven Co., U.S.A. Five decades 1Ω to 111, 110Ω. In oak cases with aluminium top and copper lining. BRAND NEW. £10/10/- Post 3/6.

MINIATURE RELAYS (ALL BRAND NEW AND BOXED)

- G.E.C. sealed, wire ends, 670 ohms. 2 H/D makes, M1099 15/-
- G.E.C. sealed, wire ends, 670 ohms. 4 C/overs, platinum, M1092 19/6
- G.E.C. sealed, wire ends, 5000 ohms. 2 C/overs, platinum, M1052 17/6
- S.T.C. size 1½ x ½ x ½in. 250 ohms. 2 C/overs, double contacts ... 7/6
- Siemens High Speed, 1K + 1K ohms. 1 C/over 10/6

FURZEHILL BEAT FREQUENCY OSCILLATOR No. 5

Push-pull output 0-10,000 c/s. of 0.5 v. at 10 ohms, or 0.50 v. at 600 ohms, monitored by 2½in. M/C meter. Incorporates set-zero control and 50 c/s. check. Operates from 100-250 v. 50 c/s. mains. In handsome instrument case, 17½ x 9 x 11in. Despatched in transit case, in perfect condition, tested, complete with 7 valves, circuit and instructions. A laboratory instrument for ONLY £12/10/- Carr. 10/-.



CHARLES BRITAIN (Radio) LTD.

11 UPPER SAINT MARTIN'S LANE

LONDON, W.C.2

TEmpLe Bar 0545

One Minute from Leicester Sq. Station. (Up Cranbourne St.) Shop Hours: 9-6 p.m. (9-1 p.m. Thursday.) Open all day Saturday.

ALL BAND RECEIVER R.107


AMATEUR—SHIPPING—BROADCAST

This magnificent 9-valve 3-wave band receiver gives world-wide reception over 1.2-17 Mc/s (18-250 metres). The sensitivity is 1 microvolt on C.W., and 2-6 microvolts on R.T. Panel controls include Bandwidth switch ("Wide" or "Narrow"), choice of AVC and BFO, Audio Filter, R.F. Gain, Aerial Trimmer. Has built-in Output stage with internal speaker. Headphones sockets. Incorporates internal A.C. mains power unit (100-250 v. A.C.) and 12 volts D.C. Vibrator pack. Size 24 x 13 x 17ins. These sets are extensively tested prior to despatch.

SUPPLIED COMPLETE AND READY FOR IMMEDIATE USE

MODEL 1. Slightly used appearance **£8.10.0** MODEL 2. Very good appearance **£10.10.0**

Carr. 20/- (England and Wales), rest of U.K. extra.

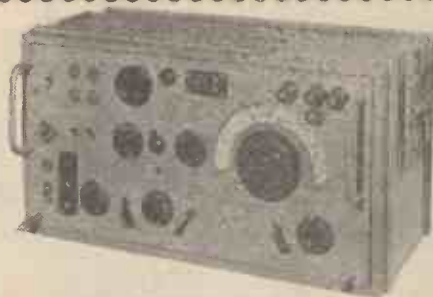

PRC/6 F.M. HANDIE TALKIE

A miniature, low powered battery operated, 13-valve Transmitter/Receiver designed for the reception and transmission of F.M. signals over the frequency range of 47-55.4 Mc/s, requiring no skill whatsoever for their operation. Each set is adjustable to operate on any 1 of 43 channels with 200 Kc/s separation. The PRC-6 is directly crystal controlled during reception and indirectly controlled during transmission. The earphone and microphone units project from the housing and are so spaced that when the unit is held with the earphone against the ear, the microphone is in the proper position for talking. Controls: on/off switch, volume control and push to talk switch. There is no limitation of the number of sets that can be operated together in the same net. Dimensions: 1 1/2 in. high x 4 1/2 in. depth x 4 1/2 in. length. Weight 3 1/2 lb. less batteries, 6 1/2 lb. approx. with batteries. £48 per pair.

A.R.C. — 5 VHF RECEIVER. 100-156 Mc/s. The smallest V.H.F. Receiver ever made, only 1 1/4 in. x 7 1/4 in. x 4 1/2 in., weight 1 1/2 lb. The ARC-5 is a 10-valve superhet, crystal controlled on 4 channels between 100-156 Mc/s. I.F. frequency—6.9 Mc/s. Audio output 300 ohms. Brand new. Limited quantity.

ONLY 70/-. Carr. 7/6
D.M.34. America's finest little dynamotor offering 12 v. in with 220 v. out at 80 mA. With suppression and smoothing mounting base. Size 4 1/2 x 2 1/2 x 2 1/2 in. Original packing. **ONLY 35/-.** P. & P. 3/6.
U.S.A. DYNAMOTORS manufactured by EICOR. Input 12 v., output 400 v. at 180 mA. Size 7 x 4 x 4 1/2 in. Brand new 45/- . P. & P. 3/6.

TEST SET 16/APN. Used for alignment, and calibration of Altimeters. Has internal vibrator supply, Audio Generator 60-1,200 cycles, finely tuned wavemeter 400-460 Mc/s, complete with 6 valves, 1 mA. Meter and all cables. In wooden case. A very fine instrument offered at **ONLY 60/-.** Carr. 10/-.

V.H.F. MOBILE AERIAL and base, as used by Taxis, Police, etc. 7/6. P. & P. 2/6.

PORTABLE TRANS/RECEIVER No. 18. A self-contained Trans/Receiver for Telephone and C.W. Range approx. 10 miles. Freq.: 6-9 Mc/s (50-33.3 metres). Valve line-up: 3 ARP-12, 2 AR-8, 1 ATP4. Complete with aerial, H.T. and L.T. meter and all accessories. Weight 20lbs. Size 8 x 10 x 17 in. **ONLY 70/-.** Carr. 10/-.

PORTABLE TELEPHONES. No more need to shout or run about! Just use our portable set with hand set and built-in ringer, etc. They're light, compact, simple to operate, and will last no less than a lifetime. Guaranteed to solve any communication problem up to 3 miles. Brand new, complete and ready for immediate use. **ONLY 55/-** per pair. Carr. 5/-.

U.S.A. WHIP AERIALS. 12ft., 12/6 post paid.

VIBRATOR PACKS. 12 volt input 300 volts output at 150 mA. consists of 12 volt vibrator, 4 metal rectifiers, chokes and smoothing condensers. **ONLY 25/-,** carriage 7/6.

POCKET MULTI-TEST METER

LIST PRICE

£6 . 19 . 6

OUR PRICE

£4.7.6

Saving You

£2 . 13 . 0



2,500 o.p.v. Multirange. 6/30/120/300/1200v. A.C., ditto D.C. 0-1k, 0-1 megohm; 400 micro-A, 12 M.A., 300 M.A.; —00 to +64-DB, 5 ranges 3 x 4 1/2 x 1 1/2 in. Large clear dial, leads. OUR PRICE £4/7/6. P. & P. 2/6.



CONVERT TO V.H.F.

Within minutes you can extend the frequency of your receiver to cover V.H.F. by using our brand new V.H.F. Converters. R.F. 26 covers 50-65 Mc/s, vernier calibrated tuning, 20/- . R.F. 25 covers 40-50 Mc/s, switched tuning, 8/6. Circuits supplied. P. & P. 3/6 on each.

COMPLETE MORSE TRAINING UNIT

Complete Code Set, contains key, buzzer, headphones, pitch control, operating internal battery, housed in portable wooden case. Brand new, only 12/6. Carr. 5/- . Battery 1/6 extra.



HI-FI CO-AXIAL SPEAKERS

BRAND NEW—U.S.A. MADE. 12in. Coaxial Speaker. The woofer uses 6.8 oz. Alnico 5 magnet. Has 3in. tweeter and an electronic crossover network to separate the speaker functions. Frequency response: 40-17,000 cycles. Output 12 watts, impedance 8 ohms. **ONLY 120/-.** 8in., 2 1/2 in. tweeter, 10 watts, etc., 90/- . P. & P. 4/- on each.



BUILD AN F.M. TUNER

With this miniature 9.72 Mc/s I.F. Strip. Has 6 modern miniature valves, 1 F.T.'s etc. supplied with full F.M. Tuner conversion details. Hailed by all our previous purchasers as a wonderful F.M. Tuner. Brand new, only 40/- . P. & P. 3/6.



F.M. TRANS/RECEIVERS BC620

Frequency range 20-27.9 Mc/s. Crystal controlled, operating on any two of 80 different channels in 100 Kc/s steps. Average range 5-10 miles. Contains 14 valves, filament plate, alignment and voltage meter, volume control, mike and phone inputs. 6 and 12 volt supply unit and dry battery case.



Complete Station only £8/10/- . Carr. 20/- . U.S.A. hand set 20/- extra.

ETCH YOUR OWN PRINTED CIRCUITS

quickly and speedily at home with an Etch-Your-Own kit. Comprises over 60 sq. ins. of laminate and enough chemicals to make dozens of printed circuits. Highest quality materials, easy to use and safe to handle. No special skill required—any mistakes can be corrected before etching. Can be completed in one hour. Fully guaranteed and complete with instruction book. **ONLY 19/6.** P. & P. 1/6.
BRAND NEW VARIABLE TRANSFORMERS Variac. Input 230 volts. Output 0-240 volts, 5 amps. Brand new, only £8. Carr. 12/6.

U.S.A. BC 312 RECEIVERS. 9-valve Superhet Receiver plus Rectifier with built-in 12 v. D.C. Power Supply. Panel tuneable ant. ckt. and 2 R.F. stages give 0.5-1.5 μv sensitivity for 10 M.W. output. Phase controllable crystal filter gives selectivity. Best bandspread and logging. Vernier knob as 90:1 and fast knob 25:1 ratio. Log scale and the band being tuned appear on dial (1.5-18 Mc/s on 6 Bands). 6C5 oscillates 470 kc/s above R.F. on 1st 3 bands, below on upper. 6L7 mixer, 2-6K7 I.F.s, 6R7 det., A.V.C. 1st A.F. 6C5 pitch controllable oscillator, 6F6 and 5W4 rectifier. Gain control is R.F. on M.V.C., A.F. on A.V.C. Power supply is removable as a unit for Marine or Mobile use. With crystal valves and manual. £25/10/- . Carr. 20/-.

U.S.A. TRANSMITTER B.C.625. Covering 100 to 156 Mc/s. 4-channel crystal controlled, using 6G6 osc., 12A6 harm. ampl., 832 harm. ampl. and driver and 832 R.F. output plate—modulated by P-P 12A6s which are transformer coupled to 6SJ7 speed amp. Supplied with circuits and operating gen. **ONLY 25/-.** P. & P. 5/-.
LIGHTWEIGHT HEAD SET. These H.S.30 phones are the smallest used by the U.S. Air Force. 250Ω imp. using soft rubber miniature ear moulds for maximum music and voice reproduction of the finest quality. Supplied free is a small transformer unit with cord and plug which steps impedance up to 4,000Ω. **ONLY 15/-.** P. & P. 2/6.

1 mA. METER. 2in. round, 17/6. P. & P. 1/6.

CONTROL BOX B.C. 602. Complete push-button control box. 4 position and on/off, with dual coloured indicator for instant channel check, in black crackle case, 5 1/2 x 3 1/2 x 1 1/2 in. Bargain price, 5/- ea. P. & P. 1/6. Two for 8/- . P. & P. 2/6.
4ft. 8in. U.S.A. TELESCOPIC CAR AERIALS. Heavily chromium plated, rustproof, rattleproof. Complete with lead and standard plug. **ONLY 27/6** post paid.

MICROPHONES — BRAND NEW. Throat magnetic 4/6; Miniature throat carbon 3/6; No. 8 carbon with switch 6/6; No. 7 moving coil 6/6. Tannoy power mikes only 5/-.

LEAD ACID ACCUMULATORS (unspillable). 2 volts 16 A.H. Ideal for 6 volts and 12 volts supply. Brand new original cartons. Size 4in. x 7in. x 2in. 5/6 each. P. & P. 1/6. 3 for 15/- . P. & P. 3/6. 6 for 27/6. P. & P. 5/-.

WIRELESS SETS. No. 19 Mk. II 65/-, carr. 10/-.



Callers : 87 TOTTENHAM CT. RD., LONDON, W.1
Mail orders: (DEPT. W.) 32a COPTIC STREET, LONDON, W.C.1
Telephone: MUSEUM 9607
WOT! You don't own a Relda catalogue! It's terrific and fully illus. Only 1/3.

Still by far the finest value

COMPLETE KIT OF PARTS

Designed by MULLARD—presented by STERNS strictly to specification.

MULLARD "5-10" MAIN AMPLIFIER

For use with the MULLARD 2 stage preamplifier (described below) with which an undistorted power output of up to 10 Watts is obtained. This combination is thoroughly recommended for "HI-FI" enthusiasts who contemplate a versatile and very high quality home installation. We supply SPECIFIED COMPONENTS AND NEW MULLARD VALVES including PARMEKO MAINS TRANSFORMER (which has extra Power available to drive Radio Tuner) and the choice of the latest Ultra-Linear PARMEKO or the PARTRIDGE Output Transformer.

Price: COMPLETE KIT (Parmeko Output Trans.) **£10.00**
Alternatively we supply ASSEMBLED and TESTED **£11.10.0**



ABOVE INCORPORATING PARTRIDGE OUTPUT TRANSFORMER £1/6/0 extra.

MULLARD'S PRE-AMPLIFIER TONE CONTROL UNIT

Employing two E.P.36 valves, and designed to operate with the Mullard 3-3 and 5-10 MAIN AMPLIFIERS, but also perfectly suitable for other makes.

Our kit is strictly to MULLARD'S SPECIFICATION and incorporates:

- Equalisation for the latest R.I.A. characteristics.
- Input for Crystal Pick-ups, and variable reluctance magnetic types.
- Input, (a) Direct from High Imp. Tape Head. (b) From a Type Amplifier or Pre-Amplifier.
- Sensitive Microphone Channel.
- Wide range BASS and TREBLE Controls.

Price: COMPLETE KIT **£6.6.0** Alternatively we supply ASSEMBLED AND TESTED **£8.0.0**
(Carriage and Insurance 5/- extra).



MULLARD 3-3 MAIN AMPLIFIER

Based entirely on the very popular "3-3" model and designed to operate with the 2-stage PRE-AMPLIFIER (shown here) thus providing all the facilities associated with the more expensive "HI-FI" equipment. We recommend it as the IDEAL SMALL HOME INSTALLATION where very high quality is desired at the lower volume level (up to 3 Watts).

We supply completely to MULLARD'S SPECIFICATION INCLUDING the latest PARMEKO Output Transformer, specified Valves and Components. Has Power available to drive a Radio Tuning Unit.

Price for COMPLETE KIT OF PARTS **£7.0.0**
Alternatively we supply ASSEMBLED AND TESTED **£8.0.0**
(Carriage and Insurance 5/- extra).



COMPLETE MULLARD 5-10 AMPLIFIER

The popular and very successful complete "5-10" incorporating Control Unit providing up to 10 Watts high quality reproduction. Input channels for high output pick-ups and all modern Radio Tuning Units, only Specified Components and new MULLARD VALVES are supplied including PARMEKO MAINS TRANSFORMERS and choice of the latest PARMEKO or PARTRIDGE ULTRA Linear Output Transformers. Adequate power available to drive Radio Tuner. Price: COMPLETE KIT, Parmeko Transformer, **£11.10.0**

Alternatively we supply ASSEMBLED and TESTED **£13.10.0**
Hire Purchase (Assembled Amp. only). Deposit £2/14/-, 12 months at 19/10.
ABOVE Incorporating PARTRIDGE OUTPUT TRANSFORMER £1/6/0 extra.



THE COMPLETE ASSEMBLY MANU-AL AVAILABLE FOR 1/6.

COMPLETE MULLARD 3-3

A VERY HIGH QUALITY AMPLIFIER DEVELOPED FROM THE VERY POPULAR 3-VALVE 3-WATT AMPLIFIER DESIGNED IN THE MULLARD LABORATORIES.

Price for COMPLETE KIT OF PARTS **£7.10.0**
(Plus 6/6 carriage and insurance).

Alternatively supplied ASSEMBLED and FULLY TESTED (Plus 6/6 carriage and insurance) **£8.19.6**

H.P. Terms Deposit £2 and 8 monthly payments of £1.
Our kit is complete to the MULLARD specification including supply of specified components, valves and PARMEKO OUTPUT TRANSFORMER. We also include switched inputs for 78 and L.P. records plus a Radio position. Extra power to drive a Radio Tuning Unit is also available.

MULLARD — STERN STEREO DESIGNS

Model 3-3 M/S

DUAL "3-3" MAIN AMPLIFIER

Comprises two "3-3" MAIN AMPLIFIERS (described above) on one chassis and is designed to operate with our DUAL CHANNEL PREAMPLIFIER for both STEREPHONIC or MONAURAL operation.

Price: COMPLETE KIT OF PARTS **£10.0.0**
Alternatively ASSEMBLED AND TESTED **£11.15.0**

H.P. Terms Deposit £2/7/0, 12 months at 17/4.
Its output power is 6 Watts (3 Watts per channel) and together with our PREAMPLIFIER provides a very acceptable STEREO installation.



DUAL CHANNEL PRE-AMPLIFIER

This model incorporates two 2-Valve Pre-Amplifiers (described above) combined into a Single Unit enabling it to be used for both STEREPHONIC or MONAURAL operation. It is designed primarily to operate with our range of MULLARD MAIN AMPLIFIERS but will also operate equally well with any make of Amplifiers requiring an Input of 250 m/v.

PRICE COMPLETE KIT **£12.10.0** Alternatively ASSEMBLED AND TESTED **£15.0.0**

H.P. Terms £3 Deposit and 12 months of £1/2/0
Perfectly suitable for MONAURAL Only operation, with one "3/3" or one "5/10" MAIN Amplifier to which the second Main Amplifier can at any time be added thus very easily providing for both STEREO or MONAURAL reproduction.

- (a) The DUAL CHANNEL PRE-AMPLIFIER together with the Dual "3/3" MAIN AMPLIFIER.
- (b) The DUAL CHANNEL PRE-AMPLIFIER together with two "5/10" MAIN AMPLIFIERS. Assembly Manual is available for 2/6 or send S.A.E. for Descriptive Leaflet.



COMPLETE STEREO AMPLIFIER

for a low priced but good quality DUAL CHANNEL STEREPHONIC AMPLIFIER. PRICE COMPLETE KIT OF PARTS **£8.10.0**

Alternatively ASSEMBLED AND TESTED **£10.10.0**

Two Mullard ECL 82 Triode Pentode Valves are incorporated in the design, they form a "CLASS A" single ended output stage in each channel. The input sensitivity is 300 mV/sets, therefore when used with most STEREO Crystal Pick Ups, or Radio Tuning Units, an output of 2 Watts per channel is achieved, or similarly when switched to MONAURAL Pick-Up position a combined output of 4 Watts is produced.



Only New HIGH GRADE Specified Components and MULLARD VALVES are supplied in all these models.

Please enclose S.A.E. if ILLUSTRATED and DESCRIPTIVE LEAFLETS are required . . . alternatively the COMPLETE ASSEMBLY MANUALS containing component Price Lists and practical Drawings, etc., are available at 1/6 each.

STERN RADIO LTD.

109 & 115 FLEET ST. LONDON, E.C.4


Telephone: FLEET STREET 5812/3/4

Stern's "fidelity" TAPE RECORDERS

BEFORE YOU BUY—HEAR THESE RECORDERS. THEY ARE COMPARABLE TO THE MUCH HIGHER PRICED MODELS—AND THEN

Take Your Pick

- MODEL CR3/S.** Incorporates the New COLLARO "STUDIO" TWIN TRACK 3-speed Deck. £41.0.0
H.P. Terms: Deposit £8/4/- and 12 months of £3/0/2.
- MODEL CR3/T.** Incorporates the very popular 3-speed COLLARO Mk. IV "TRANSCRIPTOR" Deck, which has both upper and lower tape tracks. £49.10.0
H.P. Terms: Deposit £9/18/- and 12 months of £3/12/7.
- MODEL TR3/Mk. VI.** Incorporates the New TRU-VOX Mk. VI TWIN TRACK 2-speed Tape Deck. £49.10.0
H.P. Terms: Deposit £9/18/- and 12 months of £3/12/7.

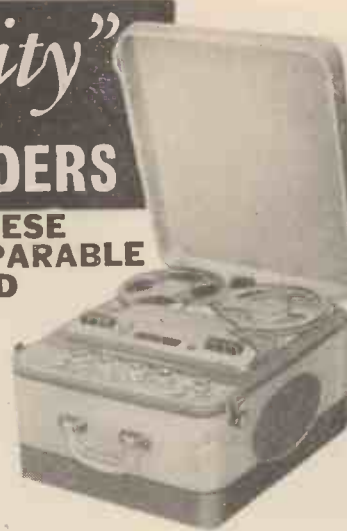

Each Model incorporates the highly successful HF/TR3 Amplifier (described opposite), thus ensuring truly "Hi-Fi" record and playback facilities.

All prices quoted provide for the COMPLETE RECORDER including CRYSTAL MICROPHONE and 1,200ft. Spool of Tape.

There are no "better value for money" Tape Recorders on the market—if you can't call and hear them—send S.A.E. for fully descriptive leaflets.

MODERNISE YOUR OLD RADIOGRAM

It is **CHEAPER** and **BETTER** TO REPLACE YOUR OLD CHASSIS and GRAM UNIT

!! RECORD PLAYERS !!

The LATEST MODELS are in stock. Many at REDUCED PRICES!!!
Send S.A.E. for ILLUSTRATED LEAFLET

- B.S.R. MONARCH UAR 4-spd. Mixer Autochanger with Crystal Pick-up. £6.12.6
- The COLLARO "CONQUEST" 4-speed autochanger Studio "O" Pick-up. £7.10.0
- The latest COLLARO "CONTINENTAL" 4-speed MIXER Autochanger, Studio "O" Pick-up. £8.10.0



- The NEW COLLARO model EP594, 4-speed Single Record Player, Studio Cartridge. £9. 18. 9
 - The COLLARO model 4 264 4-speed Single Record Player, Studio Pick-up. £6. 6. 0
 - THE NEW B.S.R. model UA12 is in stock. A 4 "SPED" MIXER AUTOCHANGER. £8. 7. 6
 - UA12 is also available incorporating the B.S.R. STEREO Pick-up plays L.F. and 78 records. £10. 10. 0
 - GARRARD BC181/4 4-speed Autochanger fitted with latest Crystal Pick-up. £10. 0. 0
 - B.S.R. Model TU9 4-speed single record player, complete with separate crystal pick-up. £4. 4. 0
- (This high output pick-up is available separately for £12/6/6)
Carriage and insurance on each above 5/- extra.

HIGH FIDELITY UNITS IN STOCK

- The latest GARRARD TRANSCRIPTION MOTOR "201" with Stroboscopically marked turntable. £23. 18. 4
 - The new GARRARD Model 4HF High Quality Single Record Player fitted with the latest T.P.A. 12 pick-up arm and G.O.S. Crystal Cartridge. £18. 7. 6
 - GARRARD Model TA MK. II Single Record Player fitted with high output Crystal Pick-up, detachable head. £8. 10. 0
- The GARRARD T.P.A. 12 TRANSCRIPTION PICK-UP ARM is available separately or with Crystal or Moving Coil Pick-up Heads
HIRE PURCHASE TERMS available on all units 28/19/6 and over.

STERN'S MK II "fidelity" F.M. TUNING UNIT

(Plus 5/- carr. and ins.)
HIRE PURCHASE: Deposit PRICE £14.5.0
22 and 12 months at £1/0/9. Incorporates the latest MULLARD PERMANENTLY TUNING HEART and the corresponding MULLARD VALVE LINE UP comprising ECC85, 2 type EF85s (or EF89s), EM84, Tuning Indicator, plus 2 type O.A. 79s Germanium Diodes. A really first-class Tuner very attractively presented and comparable to many offered at much higher prices. Power consumption is only 1.5 amps at 6.3 volts and 25 m.a. at 250 volts.



HOME CONSTRUCTORS!

YOU CAN BUILD THIS TUNING UNIT FOR ONLY £10.10.0
Please send S.A.E. for fully descriptive leaflet, or the Assembly Manual is available for 1/6.

SPECIAL CASH ONLY BARGAIN

A bulk purchase enables us to offer this very useful INTERCOM SET or BABY ALARM For only £5.5.0

Consists of MASTER UNIT (Illustrated) and one EXTENSION, providing 2-way TALK-LISTEN facility. Complete in polished wood case, size of each only 7 1/2 x 4 1/2 x 6 in. high.



!! RADIOGRAM CHASSIS !!

- ARMSTRONG "STEREO TWELVE" £37.16.0
The most complete A.M./F.M. unit yet produced. For Stereo, giving 6 watts high fidelity push-pull output on each channel, 12 watts for Monaural.
- ARMSTRONG "JUBILEE" £29.8.0
An AM/FM chassis with nine valves and with push-pull output stage providing 6 watts.
- ARMSTRONG AM/FM "STEREO 44" £28.7.0
Provision is made for Stereo and Monaural playback from pick-up or tape. Outputs provided for Stereo or Monaural tape recordings.
- DULCI Model FM1/2 £19.17.6
A complete self-powered FM Tuner incorporating automatic frequency control.

RADIO TUNING UNITS

- ARMSTRONG "S.T.3" AM/FM Tuning Units £27.6.0
A self-powered high fidelity tuner covering full VHF medium and long wavebands with automatic frequency control on VHF.
 - DULCI "H4/T" AM/FM Tuning Units £23.15.8
A 4-waveband self-powered high fidelity tuner covering the VHF/FM transmissions plus the long, medium and short wavebands.
- NEW HIRE PURCHASE TERMS are available on all above. Illustrated leaflets available—send S.A.E.
The DULCI CHANNEL STEREO PREAMPLIFIERS
The "STEREO EIGHT" PREAMPLIFIER £23.9.0
The "STEREO TWO" PREAMPLIFIER £9.8.0
(Carr. & Ins. 5/- extra.)

SPECIAL CASH ONLY OFFER !!

This very attractive PORTABLE AMPLIFIER CASE together with a good quality GRAM AMPLIFIER and a matched P.M. SPEAKER, ALL FOR ONLY £8.7.6 (plus 7/6 carr. and ins.). The Amplifier consists of a 2-stage design incorporating the 6 mercuric BVA valves and has separate BASS and TREBLE CONTROLS. The Portable Case will also accommodate almost any make of Autochanger and is attractively finished in Grey colour Rexine—WE ALSO SUPPLY SEPARATELY:—
(a) The 2-stage (plus Rectifier) AMPLIFIER £4 2 6
(b) The PORTABLE CARRYING CASE £3 17 6 (Carriage and insurance 6/- extra)
(c) 6in. P.M. SPEAKER 18 9



!! HOME CONSTRUCTORS !!

A RANGE OF "EASY TO ASSEMBLE" PREFABRICATED CABINETS Designed by the W.B. "STENTORIAN" COMPANY for "Hi-Fi" Loudspeaker systems or to accommodate high-quality equipment. The acoustically designed Bass Reflex Cabinets containing the very successful "Stentorian" Speakers give really first-class reproduction and are well recommended. Models are also available to accommodate high-quality Amplifiers, Preamplifiers, Tuning Units, Record Players, etc. All models are very easily assembled, in fact only a screwdriver is required. Fully illustrated leaflets are available including complete specifications of the various STENTORIAN LOUDSPEAKERS. Please enclose S.A.E.

The JASON "MERCURY" Switched F.M. TUNER IS IN STOCK
PRICE ASSEMBLED AND TESTED £13.10.0
CREDIT SALE Deposit £3/7/6 and 9 monthly payments of £1/4/10.
ALTERNATIVELY THE COMPLETE HOME CONSTRUCTORS KIT IS available for £9/19/6 (carr. and ins. is 5/- extra).

CAR BATTERY CHARGER

A COMPLETE KIT OF PARTS FOR ONLY £2.19.6
Will charge 6 or 12 volt batteries at max 2 1/2 amps. The design incorporates Relian Resistor and Fuse and we supply complete with Metal Box container. EASY TO-FOLLOW ASSEMBLY INSTRUCTIONS ARE INCLUDED.

Stern's "fidelity" TAPE EQUIPMENT

A SELECTION OF
HIGH FIDELITY
PORTABLE TAPE
PREAMPLIFIERS

Adds "Hi Fi" Tape Recording to your existing Audio Installation.

IN ALL MODELS WE INCORPORATE THE

TYPE "C" PREAMPLIFIER

and offer it complete in portable case with . . .

- (a) The new "COLLARO" STUDIO 3 Speed Deck. Deposit: £7/6/- 12 months £2/13/6. **£36.10.0**
- (b) The COLLARO Mk. IV "Transcripctor" 3 Speed Deck. Deposit: £8/6/0. 12 months £3/0/11. **£41.10.0**
- (c) The New TRUVOX Mk. VI Tape Deck. Deposit: £8/14/- 12 months £3/3/10. **£43.10.0**
- (d) The BRENNELL Mk. V 3 Speed Deck. Deposit: £10/6/- 12 months £3/15/7. **£51.10.0**
- (e) The WEARITE MODEL 4A Tape Deck. Deposit: £12/4/- 12 months £4/9/5. **£61.0.0**



STERNS—MULLARD TYPE "C" TAPE PRE-AMPLIFIER—ERASE UNIT

INCORPORATING THE NEW FERROXCUBE POT CORE PUSH-PULL OSCILLATOR and 3 SPEED TREBLE EQUALISATION by means of the latest FERROXCUBE POT CORE INDUCTOR.



PRICES . . . INCLUDING SEPARATE SMALL POWER SUPPLY UNIT COMPLETE KIT OF PARTS **£14.0.0** ASSEMBLED AND TESTED **£17.0.0**

Deposit £3/8/- and 12 months of £1/4/11. Assembled unit only. ALSO AVAILABLE EXCLUDING POWER SUPPLY UNIT FOR **£11.15.0** and **£14.10.0** respectively. (Carr. and Ins. 5/- extra)

Send S.A.E. for leaflet or 2/6 for Complete Assembly Manual. **WHEN ORDERING PLEASE STATE MAKE OF TAPE DECK TO BE USED** We present this "Hi-Fi" Pre-amplifier strictly to Mullard's specification etc., incorporating ONLY NEW HIGH GRADE COMPONENTS and the SPECIFIED NEW MULLARD VALVES. It comprises a COMPLETELY SELF-CONTAINED UNIT, all components and valves being contained in a well ventilated Box—Chassis neatly finished in Hammered gold with a very attractively engraved PERSEPEX FRONT PANEL.

FOR PERMANENT HIGH QUALITY INSTALLATIONS

WE ALSO OFFER (excluding Case) the following

- (a) The COLLARO Mk. IV TAPE DECK and the MULLARD TYPE "C" PREAMPLIFIER & Power Unit assembled, tested H.P. Deposit £7 and 12 months £2/11/4. **£35.0.0**
- (b) As in (a) above but the Type "C" supplied as COMPLETE KIT OF PARTS. **£32.0.0**
- (c) The TRUVOX Mk. VI TAPE DECK and the assembled Type "C" Preamplifier and Power Unit. H.P. Deposit £8/0/0 and 12 months £2/18/8. **£40.0.0**
- (d) As above but the Type "C" supplied as complete KIT OF PARTS. **£36.10.0**
- (e) The BRENNELL Mk. V DECK and the assembled Type "C" PREAMPLIFIER and POWER UNIT. H.P. Deposit £9/4/- and 12 months £3/7/6. **£46.0.0**
- (f) As above but the Type "C" supplied as complete KIT OF PARTS. **£43.0.0**
- (g) The WEARITE 4A DECK with Type "C" assembled and tested. H.P. Deposit £11/4/0 and 12 months £4/2/1. **£56.0.0**

(Carriage and Insurance on above quotes 10/- extra.) PLEASE ENCLOSE S.A.E. WITH ALL CORRESPONDENCE.

STERN RADIO LTD.

109 & 115 FLEET ST., LONDON, E.C.4

Telephone: FLEET STREET 5812/3/4

THE FINEST RANGE OF TAPE EQUIPMENT FOR THE HOME CONSTRUCTOR

YOU CAN BUILD A COMPLETE HIGH QUALITY RECORDER LIKE THIS FOR **£39.15.0**



WE OFFER THIS SELECTION

- (a) The COLLARO Mk. IV TAPE DECK with the assembled and tested HF/TR3 Amplifier. H.P. Deposit £6/18/- and 12 months £2/10/8. **£34.10.0**
- (b) As above but the HF/TR3 supplied as KIT OF PARTS... NOTE: Messrs. Collaro when supplying the Mk. IV Deck do not wire up the Deck Switch backs. We will do this for £1 or supply a wiring diagram to the Home constructor. **£30.15.0**
- (c) The TRUVOX Mk. VI TAPE DECK with the assembled and tested HF/TR3 amplifier. H.P. Deposit £7/18/- and 12 months £2/17/11. **£39.10.0**
- (d) As above but the HF/TR3 supplied as KIT OF PARTS. **£36.0.0**
- (e) The BRENNELL Mk. V DECK with the assembled and tested HF/TR3 amplifier. H.P. Deposit £9 and 12 months £3/6/- **£45.0.0**
- (f) As above but the HF/TR3 supplied as KIT OF PARTS... **£41.10.0**
- (g) The PORTABLE CASE illustrated here (£5), 1,200cf. EMITAPE (35/-), ACOS CRYSTAL MIKE (35/-), ROLA 10 x 6in. LOUDSPEAKER (30/-) ALL FOR **£9.0.0**

Carriage and Insurance on each above 10/- extra.

THE MODEL HF/TR3 TAPE AMPLIFIER

Incorporating 3-SPEED TREBLE EQUALISATION by means of the latest FERROXCUBE POT CORE INDUCTOR. PRICE FOR COMPLETE KIT OF PARTS. **£12/15/-** FULLY ASSEMBLED AND TESTED. **£16/10/-** HIRE PURCHASE: Deposit £3/6/6 and 12 months at £1/4/2.



A very high quality amplifier based on the very successful Type "A" design completed in the MULLARD LABORATORIES. ONLY NEW HIGH-GRADE COMPONENTS are incorporated including MULLARD VALVES and a GILSON OUTPUT TRANSFORMER . . . other features are: Magic Eye Recording Head Indicator—Effective Tone Control—Monitoring and Extension Speaker Sockets—has own Power Supply and can be used as independent Amplifier for direct reproduction of Gram. Records or from Radio Tuner. Overall size 11 x 6 x 6in.—Truvox—Collaro—or Brennell—please specify which. Send S.A.E. for leaflet or 2/6 for Assembly Manual.

WE HAVE THE NEW 2 SPEED TWIN TRACK

TRUVOX Mk. VI Tape Deck in stock **£26.5.0** Deposit **£5.5.0** 12 months **£1.18.6** It incorporates PRECISION REV. COUNTER and PAUSE CONTROL and operates at 3 1/2 and 7 1/2 inch/sec. speeds. It fully maintains the general high standard of all Truvox equipment, introducing refinements in appearance and ensures high quality recording, accurate timing and editing. The very popular COLLARO Mk. IV "TRANSCRIPTOR" and the BRENNELL Mk. V Decks are also available from stock.

THE NEW B.S.R.

"MONARDECK"

INCORPORATING A CORRECTLY MATCHED PREAMPLIFIER PRICE **£17.17.0** Deposit **£3/12/-**, 12 months **£1/6/2**. (Carr. and Ins. 10/-).



Designed to operate through the Pick-up Sockets of the standard RADIO RECEIVER through which first-class results are obtained. It consists of a single speed Twin Track Tape Deck, incorporating matched Preamplifier, and operates at 3 1/2 in./sec. speed. It uses 5in. Tape Spools thus providing up to 1 1/2 hours' playing time on L.P. Tapes or 1 hour on the standard 5in. Tape Spools. The equipment is supplied fully tested and completely assembled on an attractive wood plinth. It can therefore be "dropped" directly into an existing cabinet and only requires connections to the mains supply and the Pick-up Sockets, for which purposes "floating" leads are incorporated on the Preamplifier.



AMPLIFIER N24

Manufactured for the Admiralty in 1952 by Burndept, this utilises 4 valves, 1 each 5Z4G, 6V6G, 6J7G, 6J5G, and high quality components such as "C" Core Transformers and Block Paper Smoothing Condensers. Has A.C. Mains Pack for nominal 110/230 volts. Provision for 600 ohms or High Impedance Input, and has Output to 600 ohm Line. For normal use only requires changing Output Transformer. Can be used for Speech or Music, giving High Quality Reproduction. Output approximately 4 watts. Enclosed in metal case, and designed for Standard 19in. Rack Mounting, having grey front panel size 19in. x 7in. with Chromium Handles. All connections to rear panel, front having "On/Off" Switch, Gain Control, Indicator Light, Fuses and Valves Inspection Panel. BRAND NEW IN MAKER'S PACKING. ONLY £4/9/6 (carriage 10/6).



AIRBORNE TRANSMITTER RECEIVER

Type 1986

A mobile 10 channel crystal controlled V.H.F. Tx./Rx. covering 124.5/156 Mc/s. I.F. Bandwidth 23 Kc/s. Complete (less external attachments), in metal case, with all valves and 24 volt rotary power unit. Circuit supplied. Used but in first-class condition. ONLY £6/19/6 (carriage etc., 10/6).

CRYSTAL CALIBRATOR No. 10

A superb Crystal Controlled Wavemeter just released by the Minister of Supply. Has directly calibrated dial for nominal coverage of 1.5-10.0 Mc/s. but may actually be used from 500 Kc/s. up to 30 Mc/s. Complete with 500 Kc/s. Crystal, 2 valves type 1T4, 1 of 1R5 and 1 of CV286 (Neon Stabiliser), and Instruction Book. Size 7ins. x 7½ins. x 4ins., weight 5lbs. Used but in first class condition. ONLY £2/19/6 (carriage 3/6).



HARRIS ELECTRONICS (LONDON) LTD.

Now . . . in your own home, **LEARN**

RADIO - TELEVISION - ELECTRONICS

NO PREVIOUS TECHNICAL EXPERIENCE NEEDED!
PRACTICAL EQUIPMENT
(INCLUDING TOOLS)
GIVES YOU A REAL LABORATORY TRAINING

"The trained electronics engineer has a great career ahead of him."

Valuable **FREE** Book shows how E.M.I. Institutes School of Electronics can train you for today's wonderful opportunities

Radio, Television and Electronics provide a new and exciting field of opportunity for the trained man—high pay, fascinating work, a prosperous future—or if you prefer it—*independence* in your own business. And, if you are trained at home by E.M.I. Institutes School of Electronics, you will be in the hands of *specialists* who know just what is needed and the quickest way to get you ready for one of the ever-growing number of fine jobs open to trained electronics-men. Whether you are a complete beginner or an advanced student with an examination in mind, E.M.I. Institutes School of Electronics has a Course exactly suited to your needs—with or without practical equipment—from electricity and magnetism to automation techniques.

Practical Radio
Radio & Television Servicing
Practical Electronics
Electronics Engineering
Automation
Basic Practical and Theoretic Courses for beginners in Radio, T.V., Electronics, etc.
A.M.Brit.I.R.E.
City & Guilds Radio
Amateurs' Exam.
R.T.E.B. Certificate
P.M.G. Certificate
"NO PASS—NO FEE"

We definitely Guarantee **NO PASS—NO FEE**

Full details of the Courses, Practical Equipment, convenient monthly payments, our Employment and Advisory Depts. and much other helpful information is given in our Guide to Careers in Electronics. Write for your copy today. There is no obligation and the book will be sent to you quite free of charge.

FREE BOOK - POST NOW!

Please send me a free copy of your "Guide to Careers in Electronics"

NAME

ADDRESS

.....

Subject or Exam of interest.....



E.M.I. INSTITUTES SCHOOL OF ELECTRONICS

The Specialist Electronics Division of the British Institute of Engineering Technology.
(Dept. SE/22) COLLEGE HOUSE, 29-31 WRIGHT'S LANE, KENSINGTON, LONDON, W.8.



OSCILLOSCOPE No. 11

Made for Anti-Aircraft Command by A. C. Cossor in 1952, this is a First Grade L.F. Oscilloscope incorporating a Hard Valve Time Base, with existing speeds of 1.5-40 milliseconds, but is easily converted at a cost of a few shillings to produce speeds of 3 cycles per second to 30 kc/s. Has High Class Amplifier with Fine and Coarse gain controls, plus Brightness and Focus controls, and X and Y shifts. Conservatively rated Mains Power Packs for nominal 115 v. and 230 v. input, and is adequately fuse protected in all circuits. Tube employed is 2½in. ACRI0. Will make up into an ideal workshop or servicing oscilloscope. Has grey and black engraved front panel size 19in. x 7in., depth of unit being 12in. Illustrated, in heavy steel transit case in which it can be used, or removed for standard 19in. rack mounting. Complete with leads and suggested modification data. BRAND NEW, ONLY £12/10/- (carriage 15/-).

"Q FIVER" COMMAND RECEIVER. The famous American BC 453 covering 190-550 Kc/s, I.F.s being 55 Kc/s. Complete with all 6 valves and circuit. Size 11 x 5½ x 5ins. BRAND NEW IN MAKERS CARTONS. ONLY 39/6 (Post 3/6).

POWER UNITS TYPE 234. Primary 200/250 v. 50 cycles. Outputs of 250 v. 100 mA., and 6.3 v. 4 amps. Fitted double smoothing. For normal rack mounting (or bench use) having grey front panel size 19in. x 7in. BRAND NEW. ONLY 59/6 (carriage, etc., 7/6).

MARCONI SIGNAL GENERATOR TF-517-F/1. Cover 10-18 Mc/s., 33-58 Mc/s. and 150-300 Mc/s. In good, used condition, with charts. Checked before despatch. Complete with power pack for normal A.C. mains. ONLY £12/10/- (carriage, etc., 20/-).

TAPPED TRANSFORMER. Normal primary, delivering 30 v. 2 amps., which is tapped to obtain 3 v., 4 v., 5 v., 6 v., 8 v., 9 v., 10 v., 12 v., 15 v., 18 v., 20 v., 24 v., ONLY 20/-.

12 VOLTS AMERICAN DYNAMOTOR. Delivers 220 volts at 100 milli. Size 5½ x 3½in. diameter. Ideal for running Radio or Electric Shaver, etc. from car battery. ONLY 32/6.

EHT TRANSFORMERS. 5.5 kV. (Rect.) with 2 v. 1 a., 79/6. 7 kV. (Rect.) with 2 v. 1 a., 89/6. 2.5 kV. (Rect.) with 2-0-2 v. 1.1 a., 2-0-2 v. 2 a. (for VCR 97 tube etc.), 47/6 (postage 2/- per trans.).

8 v. VRATOR PACKS. Output approx. 180 v. at 30 mA., fully filtered and smoothed. Complete, ONLY 12/6.

TCS TRANSMITTERS

The renowned American TCS Model designed by the Collins Company for static or mobile use. Covers 1.5-12.0 mc/s. in 3 bands, and is complete with 7 valves, employing 2 of 1625 in P.A. Stage, 1 each of 1625 in Buffer and Modulator Stages, and 3 of 12A6 in Oscillator Stage. Provision for VFO or Crystal Control. 4 Crystal positions. Radio Telephone or Radio Telegraph. Has Plate and Aerial Current Meters. Power Requirements 12 v. LT and 400 v. HT. In black crackle case, size 11 x 13 x 11 in. New Condition internally, but externally store sold. ONLY £7/19/6 (Carr., etc. 15/-).

We can also supply the TCS RECEIVER, which matches the Transmitter in size and appearance, and covers similar frequencies. Complete with 7 valves, 1 each of 12SA7 and 12SQ7, 2 of 12A6 and 3 of 12SK7. Power Requirements 12 v. LT and 225 v. HT. In first class Condition. ONLY £10/10/0 (carriage etc., 15/-).

The double Dynamotor Power Unit, Type 21881B for 12 volts operation, delivering 400 v. for Transmitter and 225 v. for Receiver, is available at £12/10/- (carriage, etc., 15/-).

RCA AR 88 RECEIVERS

Re-conditioned and in perfect working order. "LF" Model, covers 75-140 kc/s. and 1.2-30 mc/s., ONLY £50. "D" Model, covers 500 kc/s-31 mc/s. ONLY £55 (Carriage etc., 25/-).

OSCILLOSCOPE UNIT

This Ministry of Supply Monitor 61 is a First Grade Synchroscope, readily convertible to a General Purpose Oscilloscope. Employs 3½ins. CRT type VCR 138A and built in Mains Power Unit for 116/230 volts nominal. Very modern design. Full modification data supplied. Size 10½ins. x 12½ins. x 18in. Condition as new. ONLY £7/10/6 (carr. etc. 15/-).

TRIPLETT UNIVERSAL TEST METER. Made by the famous American meter manufacturers. Size 7½ x 6½ x 8½ins., and incorporates a unique tilting bakelite container size 5½ x 3½in., which has two meters, a 25,000 ohms per Volt moving coil for D.C. measurements, and a first grade moving iron for A.C. Reads Resistance up to 40 Megohms, A.C. & D.C. Volts to 1,000, D.C. Current to 250 mA., and also has 0-50 Microamps range. Facilities for measuring Condenser Capacity etc., and Audio Output. Completely portable, with protective face cover. Complete with leads, batteries, and instructions. Fully re-conditioned. ONLY £12/10/- (post, etc. 8/-).

RCA 8in. P.M. SPEAKER, in heavy black cracked metal case, designed for use with AR 88 Receiver, or any set with 3 Ohms Output. BRAND NEW IN MAKERS CARTONS. ONLY 45/- (Post 3/6).

CANADIAN MOVING COIL PHONES. Low-resistance, fitted noise excluding chassis ear muffs, and leather covered head-band. Lead terminates to jack plug. BRAND NEW. ONLY 19/6 (Post 1/6).

MAINS ISOLATING TRANSFORMER. Manufactured by Vortexion. Fully shrouded. Will provide true 1:1 Ratio from nominal 230 v. Primary. Rated at 100 watts. BRAND NEW. ONLY 22/6 (post 2/6).

0-1 mA. DESK METER. A 2½in. Flush circular 0-1 mA. Meter mounted in bench stand with sloping panel for easy reading. Fitted with terminals. Brand New and Unused. ONLY 30/- (post etc. 2/6).

HETERODYNE FREQUENCY METERS TYPE LM14

Designed and built to United States Navy specification, these Crystal Controlled instruments combine all the advantages of the well known BC.221 Frequency Meter, plus many additional features which increase their usefulness.

- ★ Frequency range 125-20,000 kc/s. in 2 bands.
- ★ Accuracy better than .02% in 125-2,000 kc/s. band, and better than .01% in 2,000-20,000 kc/s. band.
- ★ Voltage stabilisation circuit ensures accuracy not affected by power supply fluctuation.
- ★ Separate power switches allow standby filament operation without HT supply.
- ★ Modulation switch enables instrument to be used as a Signal Generator.
- ★ Has corrector for WWV.
- ★ Supplied with removable shock protection mounting.
- ★ Size only 8½in x 8in. x 8½in. Weight 11½lb.
- ★ Brand New and Unused. Further details on application.



HIGH FREQUENCY A.C. VOLTMETER

A First Grade Moving Iron Instrument with 6ins. Mirror Scale, reading up to 150 Volts A.C. at 400 and 1,200-2,400 Cycles. In substantial Oak case with removable lid, overall size 8½in. x 8½in. x 5½in. Recently made for the Air Ministry, by Everett Edgcumbe, and in perfect order. Brand New and Unused. ONLY £7/10/-. Can be supplied modified for 50 cycles, use either 0-150 or 0-300 volts, 20/- extra.



Cash with order please, and print name and address clearly

PLEASE ADD POSTAGE OR CARRIAGE COSTS ON ALL ITEMS

HARRIS ELECTRONICS (LONDON) LTD.

Radio Corner, 138 Gray's Inn Road, London, W.C.1 Phone: TERMINUS 7937

Open until 1 p.m. Saturdays.

We are 2 mins. from High Holborn (Chancery Lane Station) and 5 mins. by bus from King's Cross

TRANSCRIPTION PICK-UP (E.M.I.s ANGEL) Model 17A. Brand New and Unused. Complete with L.P. head fitted diamond stylus for 33 $\frac{1}{3}$ /45 r.p.m. Impedance 1 ohm at 1,000 cps. List Price £17/17/- **OUR PRICE ONLY 95/-.** P. & P. 2/6. **VERY LIMITED QUANTITY.**

AERIAL MAST (Army type). 32ft. high. Lightweight kit comprising 10 steel screw-in sections (approx. 1in. dia.). Complete with guys, insulators, pegs, etc. All in canvas carrying bag. Only £4. Carr. 7/6.

MINIATURE 5B RESISTORS (for Transistor equipment). Values available: 330 ohm, 470 ohm, 680 ohm, 750 ohm, 820 ohm, 1,500 ohm, 3.3K, 10K, 12K, 47K, 56K, 82K, 100K, 110K, 150K, 250K, 270K, 330K, 470K, 750K, 1.2M, 1.8M, 2.2M, 2.5M, 3.3M, 4.7M, 10M, 7/6 per doz. Post 6d.

MICROPHONE STANDS. 3 sections of 18 $\frac{1}{2}$ in. per section. Extends to 56in. Stands securely on 3 legs which fold together for carrying purposes. A robust job, only 21/- P. & P. 2/6.

19in. **G.P.O. RACKS.** Heavy duty L channel, 6ft. high. £4/10/- Carr. 15/-

5in. dia. **C.P.I. CATHODE RAY TUBE.** Sin. dia. (U.S.A. make), new and unused. 35/- P. & P. 5/- Bases for same if required. 5/- extra.

No. 19 TRANSMITTER RECEIVERS and all spares available. List on request.

A.C.-D.C. RECTIFIER POWER SUPPLY UNIT. 110-230 v. A.C. 50 cycles input, 100/110 v. D.C. output max. 2 $\frac{1}{2}$ amp. £4/10/- Carr. 7/6. Ditto, 230 v. A.C. 50 cycles input, 200/220 v. D.C. output at 4/5 amps. approx. Good condition. £10. Carr. 10/- Also 200/250 v. A.C. 50 cycles input secondary 24 v. at 26 amps. D.C. Capable of 25% over actual rating. Brand New and unused. £12/10/- Carr. 20/-

● GEE (BROS.) RADIO LTD. ●



ACCUMULATORS

12 v. 25 A.H. New and unused. Housed in strong wooden case for extra protection, 45/- Carr. 7/6. 2 v. 100. A.H. 75 actual. Ex. Govt. New and unused. Complete with carrying handle. Size 6 $\frac{1}{2}$ x 6 $\frac{1}{2}$ x 3 $\frac{1}{2}$ in., 15/- each. Carr. 3/6. 3 sent for 50/-, or 6 for £5, carr. paid. Ditto 16 A.H., 5/- P. & P. 2/-; 6 for 24/- P. & P. 10/-; Ditto 14 A.H., less handle, 5/- P. & P. 2/-; 6 for 24/- P. & P. 10/-

VARIABLE VOLTAGE TRANSFORMER. (BERCO Regulator) Pri. 440 v. 50 cycles, sec. 0-440 v. at 6.5 amps. or can be connected for 230 v. to give 0-230 v. at 12 amps. Brand New and Unused £18/10/- Carr. 10/-

HEAVY DUTY LT TRANSFORMERS. 230 v. 50 cycles, pri. 11 to 12.5 v. sec. at 70 amps. Also 230 v. 50 cycles pri. 17 v. sec. at 35 amps. Both capable of carrying 25% over actual rating. Perfect condition. ONLY 115/- each, either type. Carr. 5/-

20 kVA AUTO-TRANSFORMER. 230/115 v. 50-60 cycles, by Jefferies Transformer Co., U.S.A. Perfect condition. £20. Carr. £1.

CONSTANT VOLTAGE TRANSFORMER. 190-260 v. primary, sec. 115 v. at 1 $\frac{1}{2}$ kVA (listed at 2kVA). Brand new and unused. £25 or £45 per pair. Car. 10/- each.

TANNOY LOUD-HAILERS.

With 180 ohm line transformer and condenser. Impedance 7 $\frac{1}{2}$ ohms, handling capacity 8 watts. Complete in slope-front wooden case. Brand new and unused. 18/6. P. & P. 3/6. 2 for 42/- Post paid. **AMPLIFIER.** 12 v. D.C. for Mobile and Outdoor operation. Powered by Converter 2-EL35's or 6L6's in push-pull. Output 12 watts fitted for mike and gram inputs. A sound and practical unit. Brand new. Only £9/10/- Carr. 5/-



SEE OPPOSITE PAGE →

AIRBORNE TRANSMITTER RECEIVER. Type 1986. A mobile 10-channel crystal controlled V.H.F. Tx./Rx covering 124.5/156 Mc/s. i.f. band width 23 kc/s. Complete (less external attachments) in metal case, with all valves and 24-volt rotary power unit. Used, but in first-class condition. ONLY £8/10/- Carr. paid.

SELENIUM METAL RECTIFIERS FB 6 or 12 v. 1 amp. 7/6; 24 v. 1 amp. 13/6; 12 v. 2 amp. 10/-; 24 v. 2 amp. 20/-; 12 v. 2 $\frac{1}{2}$ amp. 15/-; 24 v. 2 $\frac{1}{2}$ amp. 25/-; 12 v. 4 amp. 16/6; 24 v. 4 amp. 30/-; 12 v. 6 amp. 23/6; 24 v. 6 amp. 35/-; 12 v. 10 amp. 40/-; 24 v. 10 amp. 80/-

RECORD MEGGERS. 500 v. insulation tester, 0-20 megohms. In leather case, good condition, £8.

EVERSHED & VIGNOLES WEE MEGGER. 250 v. New and unused. £10/10/- P. & P. 3/- on each.

TELEPHONE SETS (TELE "F"). Housed in bakelite cases, complete with built-in ringing generators and batteries. Ideal between two or more positions up to practically any distance. Tested before despatched. ONLY 70/- P. & P. 3/6. 2 sent for £6/10/- Carr. paid.

C.M.G. 25 PHOTO CELLS (OSRAM) Brand new, 15/- P. & P. 1/-

TRANSMITTER TYPE 1131J. Output 50 watts approx. Freq. range 100-150 Mc/s. In good order £40 ex-stores.

HEADPHONES. Moving coil, high resistance or sound powered. Brand New. Any type 12/6 pair. P. & P. 1/6.

RESISTORS. Mixed parcel of $\frac{1}{2}$, $\frac{1}{4}$, 1 and 2 watt sizes. Good assortment. 7/6 per 100. Post 6d.

TELEPHONE CABLE. Twin one-mile drums (Don 8), £5. Carr. 20/- Single one-mile drums (Don 3), 50/- Carr. 7/6.

RECORDING WIRE, 4lb. spools, 3 $\frac{1}{2}$ in. dia. New and unused, 7/6. P. & P. 1/-

CONDENSERS. 4 mfd. at 11,000 wkg., 22 kv test. Perfect condition. £10. Carr. £1.

SAMSON'S SURPLUS STORES LTD.

LONDON'S GREATEST DEALERS IN RADIO AND ELECTRONIC EQUIPMENT

HEAVY DUTY LT. TRANSFORMERS. All Ratings Tropical and in perfect condition. No. 1 Pri. 210-230 v. Sec. 10 v. C.T., 5 amps, and 5 v. C.T. 10 amp. Admiralty Rating, 27/6. Carr. 3/6. No. 2 Pri. 230 v. Sec. tapped 4-11 volts, 800 amps., £6/10/- Carr. 7/6. No. 3. Pri. 200-250 v. Sec. 50 v. 30 amps., £6/10/- Carr. 7/6. No. 4. Pri. 200-240 v. Sec. 50 volts, 20 amps., £4/10/- Carr. 7/6. No. 5. Pri. 200-250 v. Sec. tapped 28-29-30-31 volts, 91 amps., £4/17/6. Carr. 7/6. No. 6. Pri. 100-250 v. Sec. Two Separate Windings, tapped 15-16-17 volts, 4 amps., 35/- Carr. 4/- No. 7. Pri. 220-240 v. Sec. Three separate Windings 6.5 volts, 50 amps., 6 v. C.T. 15 amps., 6 v. C.T., 2.5 amps., £4/19/6. Carr. 7/6. No. 8. Pri. 220-240 v. Sec. 6.3 volts, 15 amps., 25/- P.P. 3/6. No. 9. Pri. 220-240 v. Sec. Four Separate Windings. 5 v. C.T. 4 amps., 5 v. C.T., 4 amps., 5 v. C.T., 4 amps., 4 v. 4 amps., Potted Type, 32/6. P.P. 3/6. No. 10. Pri. 220-240 v. Sec. Three Separate Windings, 6.3 v. C.T., 4 amps., 6.3 v. C.T., 4 amps., 6.3 v. 4 amps. Potted Type, 29/6. P.P. 3/6. No. 11. Pri. 115-230 v. Sec. 5 volts, 15 amps., 15 kv. Insulation, 37/6. Carr. 5/- No. 12. Pri. 220-240 v. Sec. 45 volts, 2 amps., 17/6. P.P. 3/6. No. 13. Pri. 220-240 v. Sec. 6 volts, 7.7 amps., 15/- P.P. 2/6. No. 14. Pri. 220-240. Sec. tapped 10-17-18 volts, 10 amps., 52/6. Carr. 4/-

AMERICAN OHMITE RHEOSTATS. 25 Ω 2 a., 15/- 15 Ω 2.25 a., 15/- 50 Ω 1.4 a., 12/6. 15 Ω 1.5 a., 12/6. 100 3.1 a., 12/6. Twin Gang, 25 Ω 0.75 a., each 7/6. 350 Ω 25 watt, 3/6. All Types Panel Mounting, 1 $\frac{1}{2}$ in. dia. Spindles. Supplied Brand New. P.P. on all types 2/-

AMERICAN CAPACITORS. 4 Mfd. 2,500 v. wkg., 12/6. 8 Mfd. 1,500 v. wkg., 12/6. 10 Mfd. 1,000 v. wkg., 10/6. 2 Mfd. 1,500 v. wkg., 8/6. 1 Mfd. 2,000 v. wkg., 5/6. 0.1 Mfd. 7,500 v. wkg., 8/6. 6 Mfd. 330 v. wkg., 4/6. 10/8. All Capacitors Supplied Brand New. British Types. 8 Mfd. 400 v. wkg. at 71 deg. C., 5/6. Nitrogol, 8 Mfd. 750 v. wkg. at 71 deg. C., 8/6. 8 Mfd. 250 v. wkg. at 71 deg. C., 4/6. 4 Mfd. 800 v. wkg. at 160 deg. F., 3/6. 0.5 Mfd. 2,000 v. wkg. at 60 deg. C., 3/- P.P. on all condensers, 2/-

SPECIAL OFFER OF HENLEY EQUIPMENT. Wire rubber covered braided with cotton, in various colours, 40/0076 50 yd. coils 6/- P.P. 2/- 22/0076 100 yd coils 10/6. P.P. 3/6. 110/0076 50 yd coils 8/6. P.P. 3/6. Erison equipment wire 1/020, single 240 yard coils 8/6. P.P. 9/- Screen equipment wire, single 40/0076 100 yard coils 97/6. P.P. 2/6. Rubber-covered equipment wire, 98/0076 100 yard coils 6/6. P.P. 2/- Henley three-core flat P.V.C. 28/0076. Colours coloured, Red, Green and Black. 9v. per yard. Min. Qty. 12 yards. P.P. 9/-

SPECIAL OFFER OF BA SCREWS, STEEL. 4 BA 1 $\frac{1}{2}$ in. C.S., 15 gross 27/6. P.P. 3/- Or 2/6 per gross. Post free. 4 BA 1 $\frac{1}{2}$ in. steel C.S., 20 gross cartons 32/6. P.P. 3/- Or 2/6 per gross. Post free. 2 BA brass lin. C.S., 5 gross cartons 15/- P.P. 2/- 4 BA steel R.H., 1 $\frac{1}{2}$ in., 5 gross cartons 15/- P.P. 2/- **NUTS, BOLTS, WASHERS.** Special bargain offer. 5/- carton of 2, 4, 6BA nuts, bolts and washers and tags.

SPECIAL OFFER OF BRAND NEW FIELD TELEPHONE CABLE AT A FRACTION OF MAKER'S PRICE. D.S. P.W. Coiled on heavy wood drums, 47/10/- ex. warehouse. D.S. Single, one mile drums 85/- Carr. 7/6. Commando Assault Telephone Wire P.V.C., 1,000 yard drums, very useful in the home and garden, cheaper than string, 8/11. P.P. 3/6. Five drums in maker's carton, 42/6. Carr. 7/6.



LT. SUPPLY UNIT No. 19 YA 8037. A.C. input 100-250 v. D.C. output tapped 12/24 volts, continuous tropical rating, 3 amps. Built-in metal case 17 x 7 x 8 $\frac{1}{2}$ in., with fuses and switch. An ideal L.T. supply unit for operating relays, contactors, battery charging, etc. In perfect condition, £3/17/6. Carr. 7/6.

SMOOTHING UNIT No. 2 FOR ABOVE. Containing two L.T. chokes, one 2 $\frac{1}{2}$ in. M.C. D.C. 0-50 voltmeter and 6-way terminal block built in meter case. Size 17 x 7 x 6 $\frac{1}{2}$ in., 35/- Carr. 7/6.

WESTINGHOUSE DOUBLE WOUND TRANSFORMERS. 115-200-230-250v., tropically rated 400 watts. But Guaranteed 750 watts. Supplied brand new £6/10/0. Carr. 7/6.

A.M. ALKALINE CELLS. 1.5 volts 75 A.H. Heavy duty suitable for engine starting. Brand new 35/- P.P. 3/6. **Miniature A.M. alkaline cell.** 1.4 volt 3 A.H. Size 3 $\frac{1}{2}$ x 9 $\frac{1}{2}$ x 4 $\frac{1}{2}$ in. 4/6. P.P. 1/6. **Fritchett and Gold 9 volt 75 A.H. 100 hr. rate accumulators.** brand new. With carrying handle, 15/- P.P. 3/6.

AM LT. CHOKES. Resistance 1 ohm. Ideal for smoothing 12-24 volts D.C. 5 amps. tropical. Unused, 15/- P.P. 4/-

VENNER EIGHT DAY CLOCKWORK TIME SWITCHES in perfect condition. One make and one break every 24 hours. Complete with two pin sockets and key 1 amp. switch contacts 27/6. 1 $\frac{1}{2}$ amp. 32/6. P.P. 1/6.

ADMIRALTY 24 VOLT 3 A.H. BATTERIES. Banks of cells built into strong wood crates with charging instructions. Brand new 22/6. Carr. 5/- Single cells 2 volt 3 A.H. Size 4 $\frac{1}{2}$ x 1 $\frac{1}{2}$ x 1 $\frac{1}{2}$. With charging instructions. Brand new, 2/6 each. P.P. 1/6.

AMERICAN 110 VOLT GEARED MOTOE. R.P.M. 95.8, torque 6.4 lbs. per sq. in. Cap start, cont. duty, 52/6. P.P. 3/6. Step down 110-230 v. Transformer. Suitable for above motor 17/6. P.P. 2/6.

HEAVY DUTY A.C. 800-850 VOLT ALARM BELLS. Twin six inch gongs. Ideal for burglar alarm circuits, factory and outside warning. Brand new in maker's cartons, 35/- Carr. 4/- Suitable heavy duty press switches for above bells 3/6.



WESTINGHOUSE LT. SUPPLY UNITS. Type No. 189. A.C. input, 200-250 volts. D.C. output, 35 volts, 15 amps. Continuous Rating at 50 deg. C. Fitted with Input and Output Fuses and Mains On/Off Switch. Size of cabinet, 26 x 19 x 14in., £17/10/-, Ex. Warehouse.

WHARTONSBIDGE. Housed in wood cabinet size 18 x 7 $\frac{1}{2}$ x 6in., with four stud switch controls and centre zero 1.5 m.a. P.E.D. galvanometer in perfect condition, 37/6. Carr. 5/-

169-171, EDGWARE RD., LONDON, W.2.

Telephone PAD 7851 AMB 5125

RECORDING TAPES
S.A.E. for money saving
price list.

CRYSTAL CALIBRATOR

No. 10



(Battery powered 1.4 v. valves). Brand new and unused. Complete with full working instructions, circuit diagram, carrying haversack, connecting lead and spare valves. Frequency range: 1.5 to 10 Mc/s. (Nominal), but can actually be used up to 30 Mc/s. Wgt. 5 lbs. Size 7in. x 7½in. x 4in. A miniature B.C.221 in every respect. A must for every Laboratory, etc. ONLY £4/19/6.- P. & P. 2/6.

AVO MODEL 40



Admiralty Pattern No. 47A. Supplying 40 ranges of current, voltage and resistance tests. Complete in specially made wooden carrying case with leads and batteries, ready for use. Perfect cond. £10/19/6. Carr. 5/-.

AVO TEST BRIDGE



A.C. mains operated from 200-250 v. Will test resistance from 5 ohms to 50 megohms and capacity from .00001 to 50 mfd. A most useful instrument for everyday uses. In good order. Our price

ONLY £7/19/6. P. & P. 3/6.

EVERSHED & VIGNOLES MEGGER CIRCUIT TESTER (low reading ohm meter). 2 ranges. 0-3, 0-30 ohms. The perfect meter for continuity and polarity testing. Complete with test leads and ready to use. Brand new. Only £4/17/6. P. & P. 3/-.



GEE RADIO Ltd.

15, LITTLE NEWPORT STREET, LONDON, W.C.2. GER 6794/1453
ADJOINING LEICESTER SQUARE TUBE STATION — Open 9-6 Weekdays 9-1 Sat.

MARCONI SIGNAL GENERATOR. TYPE TFS17-F/1. Covering 10-18 Mc/s. 33-58 Mc/s. 150-300 Mc/s. Used but in very good condition. Complete with full technical data and instructions. Limited quantity. Unrepeatable at only £12/10/-. Carr. 20/-.



ALSO MARCONI SIGNAL GENERATOR TYPE TF 390G for 200-250 v. A.C. mains input. Freq. range 4-16 Mc/s. and 32-100 Mc/s. indirect calibration. Output 1 uv to 100 M/V 400 c/s internal modulation. In good order. Only £12/10/-. Carr. 20/-.

Output 1 uv to 100 M/V 400 c/s internal modulation. In good order. Only £12/10/-. Carr. 20/-.


BRIDGE MEGGERS



Evershed and Vignoles Series 2 in perfect condition. 250v. £22 carr. paid. Leather case available at 20/- extra.

See opposite page for MORE BARGAINS

VALVE TESTER, TYPE 4.

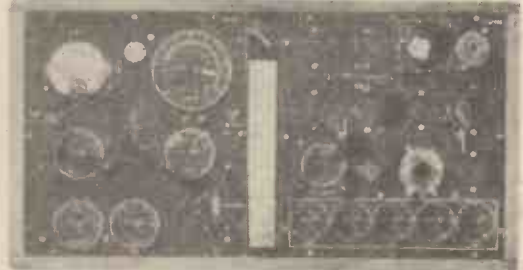

200/230 v. A.C. Input. Ex Govt., in good condition, with descriptive book containing circuit diagram of instrument and how to test valves from 1.4 v. to 40 v. With valve holders for Brit., 4, 5, 7 pin and Octal, U.S., 5 and 7 pin, 1/Octal, side contact large Brit., 4 and 9 pin. Acorn and diode. Housed in substantial wooden case with hinged lid. £7/19/6. Carr. 10/-.

D.C./A.C. ROTARY CONVERTERS

ROTARY CONVERTER. 24 v. D.C. to 230 v. A.C. 50 cycles, 150 watts. Brand new and unused £8/10/-. Carr. 7/6. Ditto, 100 watts, £6/9/6. Carr. 7/6.

ROTARY CONVERTER (as illust.). Ex-Govt. 12 v. D.C. input 230 v. A.C. Output 50 cycles at 135 watts. Complete in carrying case with lid. Voltage control, sliding resistance, mains switch and 0-300 v. A.C. flush meter. In good condition, £10. Carr. 10/-.

Motor only, without case, etc. Brand new and unused, £8/10/-. Carr. 5/-.



PRECISION SERIES 834-S. (U.S.A.). Multi range tester for A.C./D.C. volts, ohms and milliamps. Basic movement 400 microamps. Housed in wooden box with carrying strap. Overall size 7½ x 7in. x 5in. Complete with test prods, batteries, etc. Ready to use £5. Post 2/6.

RE-ENTRANT LOUD HAILERS (Ex-Govt.)



Heavy duty 20 watts all-metal. 15 ohms. Diameter 15in., length 15in. (approx.) Perfect condition. £6/10/-. Carr. 10/-.

Ditto. Brand new £8. Carr. 10/-

BAKER'S SELHURST SPEAKERS

12in. P.M. 15 ohms, 15 watts, 30-14,000 c.p.s. Our price £4/10/-.
"AUDITORIUM" 12in. 15 ohms, 12 watts, 35-16,000 c.p.s. Flux density 14,500. OUR PRICE £7/10/-.
"SUPER HI-FI 25," 12in., 15 ohms, 25 watts 25-20,000 c.p.s. Flux density 17,600. OUR PRICE £9/9/-.


All the above speakers are Brand New and full descriptive specification is available.

HEAVY DUTY—ALL STEEL TRIPOD STANDS

Adjustable every 6in. to approx. 9ft. 6in. when fully extended. (Folds up to only 4ft. 6in. for storage). Suitable for outdoor speakers, public address systems, floodlighting, etc., etc.

OUR PRICE **£3.10.0** Carr. 5/-

These stands are ideal for our RE-ENTRANT LOUD HAILER as described on left.

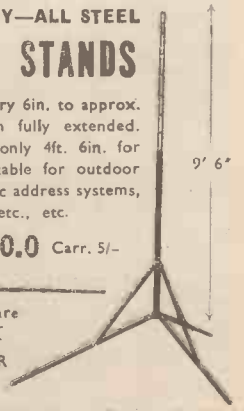

D. C. OSCILLOSCOPE

A.C. MAINS
200-250 Volts

AS SIMPLE AS π

HERE'S THE ANSWER

SIMPLIFIED SERVICING PROBLEMS WHEN USING THE

'TESTGEAR' SCOPE

3" D. C. OSCILLOSCOPE

Engineered to precision standards, this high-grade Instrument is made available at THE LOWEST POSSIBLE PRICE, incorporating the essential features usually associated with luxury instruments.

This "SCOPE" will appeal particularly to Service Engineers and Amateurs. A HIGH GAIN, EXTREMELY STABLE DIFFERENTIAL Y AMPLIFIER (30 mV/C.M.). Provides ample sensitivity with A.C. or D.C. inputs. Especially suitable for MEASUREMENT of TRANSISTOR OPERATING CONDITIONS where maintenance of D.C. LEVELS is of paramount importance. Push-pull X Amplifier; Fly-back suppression; Internal Time-base Scan Waveform available for external use; PULSE OUTPUT available for checking T.V. LINE O/P TRANSFORMERS, etc.; Provision for external X I/P and CRT Brightness Modulation.

Full 12 Months' Guarantee including Valves and Tube.



Size
Height 10"
Width 6 1/2"
Depth 9"
Weight 11 1/2 lbs.

£15.15.0

Plus P. & P
7/6

TRADE ENQUIRIES
INVITED

Or 30/- deposit, plus 7/6 post & packing and 12 monthly payments of 26/6.

ALIGNMENT ANALYSER

TYPE MC12 AC MAINS 200/250 volts. Provides: "WOBULATOR" (SWEEP FREQUENCY) OPERATION, for FM/TV alignment linear frequency sweep up to 12 mc/s. From 400 kc/s-80 mc/s. CAPACITANCE MEASUREMENT. Two ranges provided 0-60pf and 0-120pf. SPECIAL FACILITY enables true resonant frequency of any tuned ckt, I.F. transformer, etc., to be rapidly determined.

Cash price **£6.19.6** + 5/- p. & p. H.P. terms 25/- deposit + 5/- p. & p. and six monthly payments of 21/6.

RADIO & T.V. COMPONENTS (ACTON) LTD.

23 HIGH STREET, LONDON, W.3

Goods not despatched outside U.K.

PROOPS Walk-around Store

and MAIL ORDER SERVICE

52 Tottenham Court Rd., London, W.1 • Open 9-6 including Sats., Thurs. 9-1 • LAngham 0141



ETCH-YOUR-OWN PRINTED CIRCUITS

for home or Laboratory use

Etch-Your-Own kits provide chassis and wiring in transistor and miniature layouts. Losses and stray capacities cut to a minimum. Exact duplication of prototypes ensured. Each kit contains more than sixty square inches of laminated board and sufficient chemicals to make dozens of printed circuits; additional board to order. High quality materials, completely safe to handle and carefully prepared to ensure fine definition and consistently satisfactory results without laboratory technique. Comprehensive instruction book supplied. Fully guaranteed. **21/- post free**

£10 GEIGER COUNTER. Circuit embodies U.K.A.E.A. patent. Three ranges—highly sensitive—light—portable—visual and audible response—pulse output socket. Ideal for introduction to radiation measurement and nucleonic circuitry. Specially written 40-page instruction manual supplied. Batteries £2/15/3 extra.

KIT of parts £4/17/6. Identical parts. Guaranteed performance. Manual and printed circuit plates for battery pack supplied (assembled pack £2/15/3 extra). Fully illustrated assembly instructions. Spares and service permanently available.

VARIABLE SPEED HYDRAULIC GEARBOX

The specially made oil-filled casing houses a hydraulic torque conversion unit originally precision made by Westinghouse from high quality materials for the U.S. Government at an acquisition cost exceeding £150 each. Highly suitable for lathe head drive,



workshop variable speed power take-off, etc.

The unit is a variable displacement hydraulic pump feeding a reversible hydraulic motor—variation of pump displacement gives very fine output speed, control and a changeover



valve provides instantaneous reverse. Input speed 500-1000 r.p.m. 1 1/2 h.p. Shafts 1/2 in. dia. Woodruff key. Tested and guaranteed. Supplied complete with performance curves for **£16 carriage paid**

SIGNAL GENERATOR



Coverage 100 Kc/s.-100 Mc/s. on fundamentals and 100 Mc/s. to 200 Mc/s. on harmonics. Metal case 10 1/2 in. x 6 1/2 in. x 5 1/2 in. grey hammer finish. Incorporating three miniature valves and Metal Rectifier. A.C. Mains 200/250 v. Internal Modulation of 400 c.p.s. to a depth of 30%. Modulated or unmodulated B.F., output continuously variable 100 millivolts C.W. and mod. switch, variable A.F. output. Incorporating magic-eye as output indicator. Accuracy plus or minus 2%.

£6/19/6 Or 25/- deposit and 6 monthly payments of 21/6. Post & Packing 5/- extra.

SIGNAL GENERATOR

Coverage 120 Kc/s.-230 Kc/s., 300 Kc/s.-900 Kc/s., 900 Kc/s.-2.75 Mc/s., 2.75 Mc/s.-8.5 Mc/s., 8 Mc/s.-28 Mc/s., 18 Mc/s.-56 Mc/s., 24 Mc/s.-84 Mc/s. Metal case 10 1/2 in. x 6 1/2 in. x 4 1/2 in. Size of scale 6 1/2 in. x 3 1/2 in. 2 valves and rectifier A.C. mains 230-250 v. Internal modulation of 400 c.p.s. to a depth of 30 per cent., modulated or unmodulated B.F., output continuously variable 100 millivolts C.W. and mod-switch, variable A.F. output and moving coil output meter. Grey hammer finish case and white panel. Accuracy plus or minus 2%. **£4/19/6**





Or 25/- deposit and 4 monthly payments 21/6. P. & P. 5/- extra.

SIGNAL & PATTERN GENERATOR

£6/19/6 P. & P. 5/-

Or 25/- deposit. P. & P. 5/- and 6 monthly payments of 21/6. Coverage 7.8 Mc/s.-210 Mc/s. in five bands, all on fundamentals, slow motion tuning audio output. 8 vertical and horizontal bars, logging scale. In grey hammer finished case with carrying handle. Accuracy $\pm 1\%$ A.C. mains 200-250 v.



PORTABLE AMPLIFIER

Size 6 1/2 in. long, 5 in. high, 2 1/2 in. deep. Will suit any type of crystal pick-up. Output approx. 2 watts. Incorporated ECC 83 double triode. Cosor 142BT output pentode and contact-cooled rectifier. Fully isolated mains transformer for 250-250 A.C. mains. Bass, treble and volume controls

49/6 Plus P. & P. 3/6.


5" SPEAKER WITH O.P. TRANSFORMER

purchased with the above 18/6. Plus P. & P. 1/6.

F.M. TUNER UNIT

Permeability tuned, by famous German Manufacturer. Coverage 88-100 Mc/s. Complete with ECC85. Size 4 in. x 2 in. x 2 in.

25/- Plus P. & P. 1/6. Circuit diagram free with unit **1/-**



8 WATT PUSH-PULL AMPLIFIER

COMPLETE WITH CRYSTAL MIKE AND 8 IN. LOUDSPEAKER

A.C. mains 200/250 v. Size 10 1/2 in. x 6 1/2 in. x 2 1/2 in. Incorporating 6 valves, H.F. pen., 2 triodes, 2 output pens., and rectifier. For use with all makes and types of pick-up and mike. Negative feed back. Two inputs, mike and gram, and controls for same. Separate controls for Bass and Treble lift. Response flat from 40 cycles to 15 Kc/s., ± 2 db; 4 db. down at 20 Kc/s. Output 8 watts at 5% total distortion. Noise level 40 db. down, all hum. Output transformer tapped for 3 and 15 ohm speech coils. For use with Std. or L.P. records, musical instruments such as Guitars, etc.

£4.19.6 Plus P. & P. 7/6.

Or £1 deposit, Plus P. & P. 7/6 and 4 monthly payments of 23/-.



PLAYER CABINET

Finished in 2-tone leatherette, will take B.B.B. UAB, with room for amplifier and 7 in. x 4 in. speaker. Overall size 15 1/2 in. x 13 1/2 in. x 9 1/2 in. Similar to the above in POLISHED WALNUT, will take Collaro.

39/6 Plus 5/- P. & P.

COLLARO MIXER 4-SPEED AUTOMATIC CHANGER

Model 457. Type "O" Pick-up, size 12 in. x 13 1/2 in. Minimum clearance above baseboard 5 in., below 2 1/2 in., 10 records. A.C. mains 200-250 v. Turnover crystal head. BRAND NEW. Fully guaranteed.

Cash **£8/19/6**

Plus P. & P. 5/-.




13 CHANNEL TUNER INCREMENTAL TYPE

34 to 38 Mc/s. complete with PCF80 and PCC84. Tested and guaranteed. Complete with fitting instructions and knobs.

39/6 Plus 3/6 P. & P.

AC/DC POCKET MULTI-METER KIT




Comprising 2 in. moving coil meter, scale calibrated in A.C./D.C. volts, ohms and milliamperes. Voltage range A.C./D.C. 0-50, 0-100, 0-250, 0-500. Milliamperes 0-10, 0-100. Ohms range, 0-10,000. Front panel, range switch, wire-wound pot (for ohms zero setting), toggle switch, resistors and rectifier. Basic movement, 2 mA. In grey hammer finish case. **19/6** Plus P. & P. 1/6. Built and tested 7/6 extra. Point-to-point wiring diagram 1/- free with kit.

6 watt PUSH-PULL AMPLIFIER

A.C. mains 200/250 v. incorporating 4 valves and metal rectifier, 2 inputs, high and low, and controls for same. Separate controls for Bass and Treble lift. Size of chassis 11 in x 4 1/2 in. x 2 1/2 in.

59/6 Plus P. & P. 5/-.



4 WAVE BAND COIL UNIT

Complete with tuning condenser. Separate sections for short wave. Coverage 10-21 m., 21-45 m. 44-100 m., and 190-545 m. I.F. 470 Kc. BRAND NEW by famous manufacturer. Completely assembled on sub-chassis. **19/6** Plus P. & P. 3/6. With circuit diagram.

CONSTRUCTORS' PORTABLE PARCEL

Comprising case, chassis, top plate, scale, 5 in. P.M. speaker with O.F. trans., twin gaus., 2 470 Kc/s. I.F.s, trimmers, four valve holders, waverchange switch and volume control with switch.

39/6 Plus 3/6 Postage and packing.



LINE E.H.T. TRANSFORMERS

By famous manufacturer. 14 Kv. Complete with built-in line and width controls. Winding for EY51 Rectifier.

19/6 Plus P. & P. 2/6.

E.H.T. SMOOTHING CONDENSER

500 p.f. 18 Kv. D.C. working. **1/6**

MAINS TRANSFORMER

All with tapped primaries 200-250 volts. 0-160, 180, 200 v., 60 ma., 6.3 v. 2 amps, 10/6. 320-0-320 v. 75 ma., 6.3 v., 2.5 amp., 5 v., 2 amp., 10/6. 280-0-280, 80 ma., 6.3 v., 2 amp., 6.3 v., 1 amp., 10/6. Postage and packing on the above 3/-.

RADIO AND T.V. COMPONENTS (ACTON) LTD.

23, ACTON HIGH STREET, LONDON, W.3
GOODS NOT DESPATCHED OUTSIDE U.K. ALL ENQUIRIES S.A.E.
TERMS OF BUSINESS C.W.O.

R.S.C. HI-FI TAPE RECORDER KIT

Build a high quality recorder in the £70 class for only

29 1/2 GNS (Carr. 17/6)

INCORPORATING THE LATEST MK. IV COLLARO TAPE TRANSCRIBTOR. THE LINEAR LT45 HIGH QUALITY TAPE AMPLIFIER. A HIGH FLUX 7 x 4in. LOUDSPEAKER, 850 Ft. Reel of Best Quality L.P. TAPE. Spare Tape Spool, a Portable Cabinet, size approx. 18 x 13 x 9in.. Finished in Veneered walnut and connection diagram for wiring amplifier to transcriber.

FEATURES INCLUDE

- ★ 3 SPEEDS. ★ FREQUENCY RESPONSE 50-11,000 c.p.s.
- ★ SWITCHED NEGATIVE FEEDBACK EQUALIZATION FOR EACH SPEED. ★ OUTPUT 4 WATTS. ★ MAGIC EYE RECORDING LEVEL INDICATOR. ★ TWIN TRACK OPERATION. Both bottom and top tracks can be recorded or played back without removing tape. ★ INSTANTANEOUS CHANGES can be made from one track to another. Fast rewind in either direction. ★ TAPE MEASURING AND CALIBRATING DEVICE. ★ TAKES FULL 7in. DIAMETER REELS OF TAPE. ★ NEGLIGIBLE HUM. ★ ENTIRELY EFFECTIVE ERASURE.

Full descriptive leaflet supplied on receipt of S.A.E.

Or Deposit 3 GNS. and 12 monthly payments of 53/9
Cash price if settled in 3 months.



HI-FI 8 WATT AMPLIFIER

£4-19-6
SPECIAL PURCHASE DUE TO CANCELLED EXPORT ORDER
For 200-250 v. A.C. mains. Carr. 7/6

A REMARKABLE OPPORTUNITY!

Push-pull output. Latest high efficiency B.V.A. valves. Dual separately controlled inputs for mike and gram. Separate bass and treble controls. High sensitivity. Output for 15 ohm loudspeaker. Guaranteed brand new, tested, and in perfect working order.

VALVES! Full range at really competitive prices. All guaranteed!

REPANCO CONSTRUCTIONAL ENVELOPES AND COMPONENTS ALWAYS IN STOCK

All parts for: One Transistor Receiver 25/-; Two Transistor Receiver 42/-; 3 Dec 3 Transistor Receiver £3/10/6; Mini 7 Seven Transistor Pocket Portable Receiver £9/19/6; Major 7 Seven Transistor Portable Receiver 15 gns. Only Mullard, Ediswan, or Brimar Transistors supplied for Mini 7 and Major 7 Receivers. Constructional Envelopes, 3 Dec 9d., Mini 3 Pocket Portable 1/3, Mini 7 1/6, Major 7 1/6.

THE SKY FOUR T.R.F. RECEIVER



A design of a 3 valve 200-250 v. A.C. mains. L and M. wave T.R.F. receiver with selenium rectifier. For inclusion in cabinet illustrated or walnut veneered type. It employs valves 6K7, 6F6, 6F6 and is specially

designed for simplicity in wiring. Sensitivity and quality are well up to standard. Point-to-Point wiring diagram. Instructions and parts list 1/3. This receiver can be built for a maximum of £4/19/6 including cabinet. Available in brown or cream bakelite or veneered walnut.

R.S.C. BATTERY TO MAINS CONVERSION UNITS

Type BM1. An all dry battery eliminator. Size 5 1/2 x 4 1/2 x 2in. approx. Completely replaces batteries supply 1.4 v. and 90 v. where A.C. mains 200-250 v. 50 c/s is available. Suitable for all battery portable receivers requiring 1.4 v. and 90 v. This includes latest low consumption types. Complete kit with diagram 39/9 or ready for use 46/9.

Type BM2. Size 8 x 5 1/2 x 2 1/2in. Supplies 120 v., 90 v. and 60 v., 40 mA. and 2 v., 0.4 a. to 1 amp., fully smoothed. THEREBY COMPLETELY REPLACING BOTE H.T. BATTERIES AND H.T. 2 v. ACCUMULATORS when connected to A.C. mains supply 200-250 v. 50 c/s. SUITABLE FOR ALL BATTERY RECEIVERS normally using 2 v. accumulator. Complete kit with diagrams and instructions. 49/9 or ready for use 59/6.



COSSOR V.H.F. F.M. RADIO RECEIVER KITS

Brand New Boxed with valves, 10 x 6in. Goodmans speaker and printed circuit. Normal price 15 Gns. Only £8/19/6.

SIX TRANSISTOR POCKET RADIO RECEIVER

All parts including cream or coloured plastic case, printed superhet circuit, ferrite aerial. Transistors, 2 1/2in. P.M. speaker. Long and medium wavebands. Size of unit 5 1/2 x 3 1/2 x 1 1/2in. Detailed construction booklet supplied.



£9-19-6

Total cost of parts. A working unit can be demonstrated at any of our branches. All items are available separately.

ACOS HI-FI CRYSTAL 'MIKES'

33-1 hand or Desk type
35/9 (Listed 50/-)
39-1 Stick type
39/6 (Listed 5 Gns.)
Limited number.

R.S.C. TRANSFORMERS

FULLY GUARANTEED INTERLEAVED AND IMPREGNATED

MAINS TRANSFORMERS
Primaries 200-250 v. 50 c/s.

FULLY SHROUDED UPRIGHT MOUNTING	
250-0-250 v. 60 mA., 6.3 v. 2 a., 5 v. 2 a.	17/6
200-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
300-0-300 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
300-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
300-0-300 v. 130 mA., 6.3 v. 4 a., c.t., 6.3 v. 1 a. suitable for Mullard 610 Amplifier	33/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	33/9
350-0-350 v. 180 mA., 6.3 v. 4 a., 5 v. 3 a.	35/9
425-0-425 v. 200 mA., 6.3 v. 4 a., c.t., 6.3 v. 4 a., c.t. 5 v. 3 a.	49/9

TOP SHROUDED DROP-THROUGH TYPE

200-0-250 v. 70 mA., 6.3 v. 2 a., 5 v. 2 a.	16/9
350-0-350 v. 80 mA., 6.3 v. 2 a., 5 v. 2 a.	18/9
250-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	22/9
300-0-300 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
350-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	28/9

ELIMINATOR TRANSFORMERS
Primaries 200-250 v.

120 v. 40 mA., 0-0-5 v. 1 1/2 a.	14/9
90 v. 15 mA., 0-0-6 v. 250 mA	9/11

FILAMENT TRANSFORMERS
Primaries 200-250 v. 60 c/s.

6.3 v. 1.0 a.	5/9	6.3 v. 3 a.	8/11
6.3 v. 2 a.	7/6	6.3 v. 6 a.	17/6
0-4-6.3 v. 2 a.	7/9	12 v. 3 a. or 24 v.	8/9
12 v. 1 a.	7/9	1.5 a.	17/6

OUTPUT TRANSFORMERS

Midget Battery Pentode 66: 1 for 354, etc	3/9
Small Pentode 5,000 Ω to 3 Ω	3/9
Standard Pentode 5,000 Ω to 3 Ω	5/9
Standard Pentode 8,000 Ω to 3 Ω	5/9
Push-pull 8 watts 6V6 to 3 ohms	8/9
Push-pull 8 watts EL84 to 15 ohms	8/9
Push-pull 10-12 watts 6V6 to 3 Ω or 15 Ω	16/9
Push-pull 10-12 watts to match 6V6 to 3-5-8 or 15 Ω	17/9
Push-pull EL84 to 3 or 15 ohms	17/9
Push-pull 15-18 watts, sectionally wound, 6L6, KT66, etc., or 3 or 15 ohms	23/9
Push-pull 20 watt high-quality sectionally wound, 6L6, KT66, etc. to 3 or 15 Ω	47/9

SMOOTHING CHOKES

250 mA., 5 H., 100 Ω	11/9	80 mA., 10 H., 350 Ω	5/6
150 mA., 7-10 H., 250 Ω	11/9	60 mA., 10 H., 400 Ω	4/11
100 mA., 10 H., 200 Ω	8/9	1 amp. 0.5 Ω LT type	6/6

PHILCO F.M. RADIO TUNERS

With self-contained power pack. A 6-valve deluxe unit housed in beautiful walnut veneered cabinet. For 110-200-250 v. A.C. mains. Magic eye tuning indicator **1 1/2** GNS. Carr. 6/-.
Or Deposit 22/6 and 12 monthly payments of 22/6.



EXTENSION SPEAKERS

Limited number in hand-some Walnut veneered cabinets. 2-3 ohms speech coils, 6 1/2in. 29/9. 8in. 35/9. 10in. 56/9.

DRY SHAVERS. Brand new in carrying case. Operation from 3 U2 batteries, fitted in case. Just the thing for travel. Only 59/6 (approx. half price).

RECORDING TAPE. GEVASONOR Best quality L.P. 5in. 850ft. reels 22/6, 7in. 1,700ft. reels 35/-, Less than wholesale price.

SUPERHET RADIO FEEDER UNIT

Design of a high quality Radio Tuner Unit (especially suitable for use with any of our Amplifiers). A Triode Heptode F/changer is used. Pentode I.F. and double Diode Second Detector, delayed A.V.C. is arranged so that A.V.C. distortion is avoided. The W. Ch. Sw. incorporates Gram-position. Controls are Tuning, W. Ch. and Vol. Output will load most Amplifiers requiring 500 mV. input depending on Ae location. Only 250 v. 16 mA. H.T. and L.T. of 6.3 v. 1 amp. required from amplifier. Size of unit approx. 9-6-7in. high. Send S.A.E. for illustrated leaflet. Total building cost is £4/15/-. Point-to-Point wiring diagrams and instructions 2/6.

LITTLE STAAR BATTERY OPERATED RECORD PLAYING UNITS. Complete with Pick-up to take 45 r.p.m. records. Used by leading manufacturers in Transistorised Record Players. Require 8 v. battery. Only £3/19/6. Carr. 3/6.

COLLARO JUNIOR 4-SPEED RECORD PLAYER with separate pick-up having dual point sapphire stylus. Brand new, cartoned. For 200-250 v. A.C. mains only. Only £4/15/-. Post 3/6.

B.S.R. MONARCH AUTO-CHANGERS

Type UA2 4 speed, T/O Pick-up with sapphire stylus £8/19/6. Carr. 4/6
Collaro A04/544 4-speed single player with hi-β turnover crystal pick-up head £8/12/6. Carr. 4/6.

R.S.C. A12 STEREO AMPLIFIER KIT


£3-19-6

Carr. & packing 7/6

A complete kit of parts to construct a good quality 3 + 3 watt (total 6 watt) stereo amplifier providing really life-like reproduction. Suitable for use with all stereo, pick-up heads at present available. Ganged volume and tone controls. Preset balance control. Outputs for matched 8-ohm speakers. For 200-250 v. A.C. mains. Astonishing value.

W.B. "STENTORIAN" HIGH FIDELITY P.M. SPEAKERS

HF1012, 10 watts 15 ohms (or 3 ohm) speech coil. Where a really good quality speaker at a low price is required, we highly recommend this unit with an amazing performance. 4 Gns. Please state whether 3 ohm or 15 ohm required.

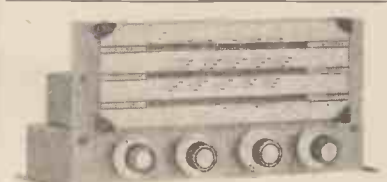

AM/FM RADIOGRAM CHASSIS, HIGH QUALITY. PUSH-PULL. 6-8 WATT OUTPUT. Current manufacture. 12 months guarantee. For 200-250 v. mains. Covers L and M. wavebands plus F.M. Includes 8 latest type miniature B.V.A. valves. Only 22 gns. plus 7/6 carr. Or deposit £2/12/- and 9 monthly payments of £2/12/-.

R.M.I. 4-Speed Single Players with hi-β T/O crystal pick-up head. For Stereo and Monaural. £7/15/6. Carr. 4/6.

GARRARD 4-SPEED AUTO-CHANGERS
Type MC/120H. Limited number at 9 gns. (approx. half price). Carr. 5/6. Brand new.

R.S.C. A.10 ULTRA LINEAR 30 WATT AMPLIFIER

HIGH FIDELITY PUSH-PULL UNIT EMPLOYING SIX VALVES. EF86, EF96, EOC82, 807, 807, G234. Tone Control. Pre-amp. stages are incorporated. Sensitivity is extremely high. Only 12 millivolts minimum input is required for full output. THIS ENSURES THE SUITABILITY OF ANY TYPE OR MAKE OF MICROPHONE OR PICK-UP.

Separate Bass and Treble controls give both "HI" and "LO" with ample tone correction for long playing records. An extra input with associated vol. control is provided so that two separate inputs - such as "mike" and gram, etc., etc. can be simultaneously applied for mixing purposes. AN OUTPUT SOCKET WITH PLUG IS INCLUDED FOR SUPPLY OF 200 v. 20 m.A. and 6.3 v. 1.5 A. FOR A RADIO FEEDER UNIT. Price in kit form with easy-to-follow wiring diagrams. Or Factory built with 12 months' guarantee £13/10/6. TERMS ON ASSEMBLED UNITS. DEPOSIT 24/9 and 12 monthly payments of 24/9.

Only **11 Gns.**

Carr. 10/-

Cover as illustrated 18/9 extra.

Operation. Negative feedback of 20 D.B. in main loop. **CERTIFIED PERFORMANCE FIGURES ARE EQUAL TO MOST EXPENSIVE UNITS AVAILABLE.** Frequency response ± 3 D.B. 30-30,000 c/s. Tone Controls ± 12 D.B. at 50 c/s. ± 12 D.B. to -6 D.B. at 12,000 c/s. Hum and noise 70 D.B. down. Good quality reliable components used. Chassis finish blue hammer. Overall size 13" x 9" approx. Power consumption 150 wats. For A.C. mains 200-250 v. 50 c/s. Outputs for 3 and 15 ohm speakers. **EQUALLY SUITABLE FOR THE CONNOISSEUR OR FOR LARGE HALLS, CLUBS OR OUTSIDE FUNCTIONS. IDEAL FOR USE WITH MUSICAL INSTRUMENTS SUCH AS STRING BASS, ELECTRONIC ORGAN, GUITAR, etc. FOR DANCE BANDS, GARRISON THEATRES, etc., etc.** We can supply Microphones, Speakers, etc., at keen cash prices or on terms with amplifiers. EXPORT ENQUIRIES INVITED.

LINEAR "DIATONIC" 10 WATT HIGH FIDELITY AMPLIFIER. A compact attractively finished unit. 12 Gns. Cash. Send S.A.E. for leaflet. H.P. Terms. Dep. 22/3 and twelve monthly payments of 22/3.

LINEAR L45 HIGH QUALITY STEREO AMPLIFIER. Total output 10 watts. Randoms Verpan Peda Plate. All controls geared. Only 11 Gns.

LINEAR L46 MINIATURE 4/5 W. QUALITY AMPLIFIER. Suitable for use with any record playing unit and most microphones. Negative feedback 12 D.B. Bass and Treble controls. For A.C. mains input of 200-250 v. 50 c.p.s. Output for 3/3 ohm speaker. Three miniature Mullard valves. Size only 6 x 3 x 6 1/2 in. high. Chassis fully isolated from mains. Guaranteed 12 months. Only **£5/19/6** Or Deposit 22/- and 8 monthly payments of 22/- Send S.A.E. for leaflet.

12S MINIATURE 8 WATT GRAM AMPLIFIER

For 200-250 v. 50 c.p.s. A.C. mains. Overall size only 6 1/2 x 4 1/2 x 3 in. Fitted vol. and Tone Control with mains switch. Designed for use with any kind of single player or record change lag unit. Output for 2-3 ohm speaker. Guaranteed 12 months. Only 57/9.

R.S.C. A7 2-4 WATT QUALITY AMPLIFIER. Spec. exactly as A5 below with exception of output wattage. Complete kit of parts, diagrams and instructions £3/15/-, carr. 3/6.

R.S.C. A5 4-5 WATT HIGH GAIN AMPLIFIER

A highly sensitive 4-valve quality amplifier for the home, small club, etc. Only 50 millivolts input is required for full output so that it is suitable for use with the latest high-fidelity pick-up heads in addition to all other types of pick-ups and practically all mikes. Separate Bass and Treble controls are provided. These give full long playing record reproduction. Hum level is negligible being 71 D.B. down. 15 D.B. of negative feedback is used. H.T. of 200 v. 20 m.A. and L.T. of 6.3 v. 1.5 a. is available for the supply of a Radio Feeder Unit or Tape Deck pre-amplifier. For A.C. mains input of 200-250 v. 50 c/s. Output for 2-3 ohm speaker. Chassis is not alive. Kit is complete in every detail and includes fully punched chassis (with baseplate) with the blue hammer finish and point-to-point wiring diagrams and instructions. Exceptional value at only **£4/15/6** or assembled ready for use 25/- extra, plus 3/6 carriage. Or Deposit 22/- and five monthly payments of 22/- for assembled unit.



TWEETERS. 4in. Plessey, 3 ohms, 18/9. Rola/Celestion 7.5 ohms, 25/9.

P.M. SPEAKERS. 3-8 ohm 2 1/2 in. Ferdio 21/9. 5in. Goodmans 17/9. 7 x 4in. E.A. Nilp-Mcal 10/9. 4in. Rola 12/9. 8in. Rola 12/9. 6in. Goodmans 31/9. 8 x 6in. Niac with high flux magnet 25/9. 10in. E.A. 22/9. 10 x 6in. Nilpical Goodmans 29/9. 12in. E.A. 29/11. 12in. E.A. 3 or 16 ohms, 10 watts, 12,000 lines, 59/6.

COLLARO CONQUEST 4-SPEED AUTO-CHANGERS. With studio pick-up with turnover head. BRAND NEW. Cartoned latest model. For 200-250 v. A.C. mains. £7/19/6. Carr. 4/6.

GRAM MOTOR with Turntable and pick-up, standard 78 r.p.m. Brand new. Only 25/9.

AC08 Crystal Microphone Inserts. Brand new. Only 5/11 ea. Bx. Equip. 4/11 ea. AC08 HOP59 Hi-Fi Crystal Cartridges. (Turnover type with sapphire stylus). Standard replacement for Garrard and Collaro. Only 19/9. B.S.E. Full 17/9. Garrard GC9 19/9.

HIGH FIDELITY 12-14 WATT AMPLIFIER TYPE A11

PUSH-PULL ULTRA LINEAR OUTPUT "BUILT-IN" TONE CONTROL PREAMP STAGES




Two input sockets with associated controls allow mixing of "mike" and gram, as in A10. High sensitivity. Includes 5 valves, EOC82, EOC83, HL4, EL64, 8Y8. High Quality sectionally wound output transformer specially designed for Ultra Linear operation, and reliable small condensers of current manufacture. **INDIVIDUAL CONTROLS FOR BASS AND TREBLE "LO" and "HI" Frequency response ± 3 D.B. 30-30,000 c/s. Hum level 60 D.B. down. ONLY 27 millivolts INPUT required for FULL OUTPUT.** Suitable for use with all makes and types of pick-ups and microphones. Comparable with the very best designs. For STANDARD or LONG PLAYING RECORDS. For MUSICAL INSTRUMENTS such as STRING BASS, GUITARS, etc. OUTPUT SOCKET with plug provides 200 v. 20 m.A. and 6.3 v. 1.5 a. For supply of a RADIO FEEDER UNIT. Size approx. 12-9-7in. For A.C. mains 200-250 v. 50 c/s. Output for 3 and 15 ohm speakers. Kit is complete to last unit. Chassis is fully punched. Full instructions and point-to-point wiring diagrams supplied. (Or factory built 45/- extra.) Only **8 Gns.** Carr. 10/- if required leaved metal cover with 2 carrying handles can be supplied for 18/9. TERMS ON ASSEMBLED UNITS. DEPOSIT 18/9, and 12 monthly payments of 18/9. Send S.A.E. for illustrated leaflet detailing Ready-to-assemble Cabinets, Speakers, Microphone etc., with cash and credit terms.

R.S.C. PORTABLE GUITAR AMPLIFIERS



JUNIOR 5 WATT High Quality Output. Separate Bass and Treble "cut" and "boost" controls. Sensitivity 15 m.v. High Flux 8in. 1/2 speaker. Input sockets for Radio/Tape or Gram Pick-up and Mike /Instrument Pick-up. Handsome strongly made cabinet (Size approx. 14 x 14 x 7 1/2 in.). Painted in satin walnut and fitted carrying handle. **£8/19/6** Carr. 7/6. Or Deposit £1 and nine monthly payments of £1. Send S.A.E. for leaflet.



SENIOR 10 WATT High Fidelity Push Pull output. Separate Bass and Treble "cut" and "boost" controls. Twin separately controlled high gain inputs so that two instruments such as Guitar and String Bass can be used at the same time. Two Loudspeakers are incorporated, a 12in. P.M. for Bass notes, and a 7 x 4in. elliptical for Treble. Cabinet is well made and finished satin walnut. Size approx. 15 x 15 x 8in. 12 Gns. Plus 10/- carr. H.P. TERMS. DEPOSIT 22/6 and 12 monthly payments 22/6. Both models for 200-250 v. A.C. mains.

STAAR GALAXY 4-SPEED MIXER AUTO-CHANGERS. Brand New, cartoned. Turnover sapphire styl. Many exclusive features. Unique design motor virtually free from rumble. For 200-250 v. A.C. mains. Limited number tested and guaranteed £5/19/6. Carr. 4/6.

PORTABLE CABINETS

For Record Players or Tape Recorders. Rexins covered. Wide selection of attractive designs and colour combinations. **PRICES FROM 15/9**



12in 10 WATT HIGH QUALITY LOUDSPEAKER IN POLISHED WALNUT FINISHED CABINET
Gauss 12,000 lines. Speech coil 3 ohms or 15 ohms. Only **£4/19/6**. Carr. 5/-.
Terms: Deposit 11/- and 9 monthly payments of 11/-.
12in. 20 WATT 12,000 line 1/2 speaker: 15 ohms, in Cabinet finished as above. Size 18 x 18 x 8in. £7/19/6 or Deposit 13/10 and 12 monthly payments 13/10.

PORTABLE CABINETS. Attractive design. Two-tone finish covered. Will take Collaro, B.S.E., Garrard or Staar Auto-Changer, amplifier and 7in. x 4in. or 5in. speaker. Slightly soiled. Only 49/6.

AC08 HIGH FIDELITY PICK-UPS. GP54 with HOP59/52 Cartridge. Turnover sapphire styl, cream finish. Limited number at approx. half price. Only 29/11.

SPECIAL OFFER

Above cabinet Staar Changer, Gram amplifier, and 6in. or 6in. x 4in. speaker £8/19/6. Carr. 10/- Or with B.S.E. Changer in lieu of Staar 11 Gns. Carr. 10/-.

PLESSEY DUAL CONCENTRIC 12in. P.M. SPEAKERS

(18 ohms), consisting of a high quality 12in. speaker of orthodox design supporting a small elliptical speaker ready wired with shocks and condensers to act as tweeter. This high fidelity unit is highly recommended for use with our all or any similar amplifier. Rating 10 watts. Gauss 12,000 lines. Price only **£5/17/6** Or Deposit 10/6 and 12 monthly payments of 10/6



R.S.C. MANCHESTER, LEEDS & BRADFORD (LEEDS) LTD.

Open to callers at following branches:-
2-7 County Arcade, Leeds, 1.
54-56 Morley Street, Bradford.
6-10 Brown Street, (Market St.) Manchester, 2.

TERMS: C.W.O. or C.O.D. No C.O.D. under £1. Postage 1/9 extra on all orders under £2. 2/9 extra under £5 unless carriage stated. Trade supplied. Post orders to Mail Order Dept., 25-31 Moorfield Road, Leeds, 12.

R.S.C. MANCHESTER BRADFORD and LEEDS (LEEDS) LTD.

For addresses and terms see page 135

TANNOY RE-ENTRANT LOUDSPEAKERS 8 watt 7.5 ohms 19/6

HIGH FIDELITY 10 watt PUSH-PULL AMPLIFIERS Separate Bass and Treble controls. Inputs for Gram. and Mike. Mullard latest type valves. Brand New Guaranteed in perfect order but lightly store soiled. Very limited number. 46/15/-. Carr. 7/6.

ELECTRIC BELLS. 3 m. diameter. 4.5 v. to 12 v. Battery or Mains operation. Only 4/8.

SELENIUM RECTIFIERS. We can quote special prices for quantities of 12 to 10,000.	
L.T. Types	H.T. Types
2/6v. 1a. H.W. 1/9	130v. 40m.a. H.W. 3/9
3/12v. 1a. H.W. 2/9	250v. 50m.a. H.W. 3/11
F.W. (Bridge)	250v. 80m.a. H.W. 7/9
6/12v. 1a. 3/11	250v. 250m.a. H.W. 12/9
6/12v. 2a. 6/11	Contact Cooled
6/12v. 3a. 9/9	250v. 80m.a. H.W. 6/11
6/12v. 4a. 12/3	250v. 75m.a. F.W. (Bridge) 8/11
6/12v. 5a. 14/9	L.T. Type F.W. Bridge
6/12v. 6a. 15/6	6/12v. 15a. 35/9
6/12v. 10a. 25/9	

VIBRATORS. Oak and Wearite, synchronous 7 pla. 2 v. 7/9, 6 v. 8/9, 12 v. 4 pla non-synchronous 7/9.

2 v. 16 A.H. EX. GOVT. ACCUMULATORS. New boxed. Only 5/6 each, 3 for 15/-. plus 2/6 carr.

EX GOVT. MAINS TRANSFORMERS
All 200-250 v. 50 c/s input.
Fr. 0-110-200-230-250 v., 275-0-275 v. 100 mA., 6.3 v. 7 a., 5 v. 3 a. 22/9
300-0-300 v. 60 mA., 6.3 v. 2 a. 11/9
265-0-265 v. 150 mA., 6.3 v. 11 a., 5 v. 3 a., 5 v. 3 a. 29/11
350-0-350 v. 100 mA., 6.3 v. 2 a., 5 v. 2 a. 18/9
350-0-350 v. 160 mA., 6.3 v. 5 a., 5 v. 3 a. 27/9
400-0-400 v. 250 mA., 5 v. 2 a., 5 v. 2 a. 15/9
450-0-450 v. 250 mA., 6.3 v. 3 a., 6.3 v. 1 a., 5 v. 6 a. 49/9
0-24-26-28 v. 15 amps. A.C. conservative Govt. rating (marked with D.C. rating after rectification) 69/9. Carr. 15/-
0-10-20-25 v. 24 a. (Govt. rating) 79/6. Carr. 15/-
AUTO 500 watts, 0-215-220-225-230-235-240 v. 29/9 Carr. 7/6. 50 watts, 0-110-120-230/250 v. 8/11.

SPECIAL OFFER. Brand New Ex-Govt. 24 v. 15 amp. F.W. Bridge Selenium Rectifiers. Only 27/9 ea.

JACK PLUGS. Standard type complete with 4ft. screened lead. 1/11 each. New Jack Sockets (moulded type), Igranite 2/9 each.

EX GOVT. SMOOTHING CHOKES
200 mA., 3-5 H., 50 ohms, Parmeko
100 mA., 5 H., 100 ohms 3/11
150 mA., 10 H., 50 ohms 9/9; 80 mA., 20 H., 900 ohms 5/9;
120 mA., 12 H., 100 ohms 8/9; 50 mA., 50 H., 1000 ohms 6/9;
100 mA., 10 H., 100 ohms 6/9; 60 mA., 5-10 H., 250 ohms 2/11

EX GOVT. CASES. Well ventilated, black crackle finished, undrilled cover. Size 14 x 10 x 8 1/2 in. high. IDEAL FOR BATTERY CHARGER OR INSTRUMENT CASE, COVER COULD BE USED FOR AMPLIFIER. Only 9/8, plus 2/9 post.

D.C. SUPPLY KITS. Suitable for electric trains. Consist of mains trans. 200-250 v. 50 c.p.s.; 12 v. lamp selenium rect. (F.W. Bridge); 2 fuses, change direction switch, variable speed regulator, partially drilled steel case, and circuit. Very limited number, 29/8.

JUNCTION TRANSISTORS. R.F. type, 12/6. Audio type 8/9. Power type Goltop V15/10P 2 watts 18/9. OC71, 10/-, OC72, 17/-, XB102, 10/-, XB104, 10/-.

ARDENTE DEAF AID EARPIECES with lead and plug. Brand New. Only 15/6.

BATTERY CHARGING EQUIPMENT

Trade supplied. Discounts according to quantity.

HEAVY DUTY CHARGER KIT

6/12 v. variable charge rate up to 6 amps. Consisting of Mains Trans., F.W. (Bridge) Selenium Rectifier, 0-7 amp. meter, multi-position switch with knob, fuses, fuseholders, panels, plugs and circuit. Only 59/9. Post 4/6.

ASSEMBLED CHARGERS

6 v. 1 a. 19/9
6 v. 2 a. 29/9
6/12 v. 1 a. 27/9
6/12 v. 2 a. 38/9
6/12 v. 4 a. 56/9

Above ready for use with mains and output leads. Cases well ventilated and finished in stoved blue hammer. Carr. & pkg. 3/6.

CHARGER TRANSFORMERS

200-230-250 v. 50 c/s.
0-8-15 v. 1 1/2 a. 11/9
0-9-15 v. 2 1/2 a. 14/9
0-9-15 v. 3 a. 16/9
0-9-15 v. 5 a. 19/9
0-9-15 v. 6 a. 23/9

BATTERY CHARGER KITS

Consisting of Mains Transformer F. W. Bridge. Metal Rectifier, well ventilated steel case. Fuses, fuse-holders, grommets, panels and circuit. Carr. 2/9 extra.
6 v. or 12 v. 1 amp. 22/9
As above, with ammeter. 32/9
6 v. 2 amps. 25/9
6 v. or 12 v. 2 amps. 31/6
6 v. or 12 v. 2 amps. 42/9 (inclusive of ammeter)
6 v. or 12 v. 4 amps. 53/9
6 v. or 12 v. 4 amp. with variable charge rate selector and ammeter 59/9

CHARGER AMMETERS

0-1.5 amp., 0-3 amp., 0-4 amp., 0-7 amp., 0-25 amp., 0-60 amp 8/9

ASSEMBLED CHARGER

6 v. or 12 v. 2 amps. Fitted Ammeter and selector plug for 6 v. or 12 v. Louvred metal case, finished attractive hammer blue. Ready for use with mains and output leads. Double Fused. Only 49/9 Carr. 3/9.
As above, but for 3 amp. charging. Only 59/6. Carr. 3/9

All for A.C. Mains 200-250 v. 50 s/c Guaranteed 12 months

ASSEMBLED 6 v. or 12 v. 4 amps.



Fitted Ammeter and variable charge selector. Also selector plus for 6 v. or 12 v. charging. Double fused. Well ventilated steel case with blue hammer finish. Ready for use 69/6 with mains and output leads. Carr. 5/-. Or Deposit 13/3 and five monthly payments of 13/3. As above but for 6 amp. charging. 4 GNS. Carr. 5/-. Or Deposit 16/- and 5 monthly payments of 16/-. The 6 amp. model only, is slightly store soiled and is being offered at well below usual price.

ALL THE BEST

Tape Recorders are fitted with **MARRIOTT RECORD PLAY-BACK AND ERASE HEADS**

Private and Trade enquiries to:—

P.A. MARRIOTT & CO.

SUNLEIGH WORKS, SUNLEIGH ROAD, ALPERTON, MIDDLESEX

Phone: Wembley 7493

A050 AUDIO OSCILLATOR

gives a sine wave output of 1 millivolt to 10 volts over the range 20-200,000 c.p.s. This is covered in four ranges, each directly calibrated. Complete with all valves and ready for use from 200/250 volts A.C. mains. £10 plus 4/6 carr./packing.



CR50 BRIDGE measures 10 pF to 100 mF and 1 ohm to 10 Megohm. in fourteen ranges. Leakage test for condensers. Designed for bench use, measurements are quickly and accurately made. Price complete £8/2/6, plus 4/6 carr./pack.

VV60 AUDIO VOLTMETER for checking and designing Hi-Fi equipment, etc. Measures 1 millivolt to 100 volts. Mains operated. £14 plus 4/6 carr./pack.


Details of these instruments sent on receipt of stamped addressed envelope.

Trade supplied direct.


GRAYSHAW INSTRUMENTS

126 Sandgate High Street, Folkestone, Kent


Phone: Folkestone 78618



MINIATURE UNISELECTOR SWITCH. two banks of ten plus home contacts, one bank continuous of normal. 30 ohms coil for 24 volt operation. Brand new, manufacturer's packing. Price 22/6 each. P. & P. 2/6. Illustrations above and below.



SIEMENS H.S. RELAY. Very latest type, sealed. H96E. 1,700 ohms plus 1,700 ohms, single C.O. contacts. Brand new with fixing clip. In maker's cartons. Price 16/6 each, plus 1/- P. & P.




NEW CARPENTER'S TYPE POLARISED RELAYS. 2 x 9 500 turns at 1,685 ohms. Price 22/6 each. P. & P. 1/-.

MINIATURE MOVING COIL DIFFERENTIAL RELAY. Two coils 350 ohms each. Operating current minimum 140 microamp, nominal 400 microamp, maximum 8 milliamp. One pole two way, or, centre stable.



Two way contact current 100 mA at 50 V. A.C. or D.C. Size 1 1/4 x 1/2 x 1/2 in. Price: 22/6 each.


VENNER 8-day clockwork Time Switch. Contacts 1 amp. 230 volt. 24 hour phase, 1 hour divisions, allows setting for one make and one break to be made every 24 hours, complete with key. Used but guaranteed perfect. Price 27/6 each. P. & P. 1/6.



MINIATURE P.M. MOTOR. 12/24 volt, reversible. 1 1/2 in. dia. New, price 9/6 each. P. & P. 1/-.



AIRCRAFT CINE-CAMERA G45B Mk. II Fully modified, fitted with f/3.5 triple anastigmatic lens, takes 25ft. of 16 mm. film, fitted with 24 v. motor. 16 exposures per sec. Brand new, original packing, £4/10/- each. P. & P. paid.

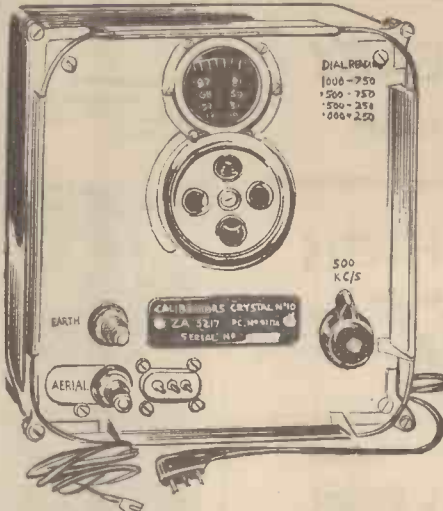

CRYSTAL CALIBRATOR No. 10. A crystal controlled 4-valve high-grade instrument in the same category as the famous B.C.221. Directly calibrated, does not require cross reference or charts—functions as follows: (1) A crystal controlled oscillator which provides fixed frequency signals of 500 KC and all harmonics of 500 KC to beyond 10 Meg. and up to 30 Meg. (2) A variable oscillator from 250 KC to 500 KC, this enables all intermediate frequencies between 250 Kc/s. and 30 Meg. to be produced and modulated. The instrument is supplied complete with 3 spare valves, all leads and maker's instruction book in carrying haversack. The complete outfit is brand new—repeat NEW. Price: £4/19/6. Carr. 3/-.



MUIRHEAD PRECISION, 4 bank, 1 pole, 24 position Stud Switch. Heavy duty contacts, brand new, original boxes. Price 17/6 each. P. & P. 1/-.

CERAMIC PRECISION SWITCH. 2 pole, 6 way, 4 banks. New in manufacturer's boxes. Price 10/6 each. P. & P. 1/6.



20 WAY STRIP containing standard Post Office telephone Jack Sockets, overall size 11 x 3 1/4 x 1/2 in. New. Price 15/- each. P. & P. 1/6. **10 WAY STRIP** standard Post Office telephone Jack Sockets spacing allowing Gramic Jack Plugs. New. Price 10/- P. & P. 1/6.

LATEST MOST MODERN TYPE OF EX W.D. MINIATURE HEADPHONES As illustrated. Brand new, low impedance. Price: 10/6 plus P. & P. 1/6.



NEW MOVING COIL HEADSETS. Complete with Tannoy carbon hand microphone, with plug suitable for No. 19 set. Price: 12/6 each, plus P. & P. 2/-.

AUTO TRANSFORMERS. Step up, step down, 110-200-220-240 v. Fully shrouded. New. 300 watt type £2/2/- each. P. & P. 2/6. 500 watt type £3/3/- each. P. & P. 3/9. 1,000 watt type £4/4/- each. P. & P. 6/6. Also 60 watts, 19/6 each. Plus P. & P. 2/-.


MARCHING COMPASS Mk. I. Brand new, ex W.D. Price 14/6. P. & P. 1/-.

NEW GALVANOMETERS Solid brass, 3in. dial, in polished wooden case. 75 degree scale, 30 mA either side. 100 ohm coil. Price 12/6 each. P. & P. 1/6.



L.T. TRANSFORMER. Input 230 V. Output 50 V. 50 amp. Adjustable by regulator switch on primary steel case with mains switch. Will take 100% overload. Weight 150lb. Wound at 800 amps per sq. inch. Brand new. Price: £15. Carr. £1.


PLATE TRANSFORMER of very best U.S.A. make, brand new, original manufacturer's cases. Input tapped at 190/210/230/250 V. Output 2250-0-2250, centre tapped 400 mA. Nett weight 76lb., size 13in. x 9in. x 6 1/2 in. Price £6/10/- each, plus carr. 10/-.



BRAND NEW SELENIUM FULL WAVE BRIDGE TYPE RECTIFIERS, in manufacturer's original packing. D.C. output 36 v. 10 amp., made up of 12 x 110 mm. dia. plates. These fitted in cooling funnel (removable). Size 11 1/2 in. x 8 in. x 4 1/2 in. Price 45/- P. & P. 3/3.

TWELVE PLATE F.W. BRIDGE CONNECTED RECTIFIER mounted on 200/250 volt A.C. input transformer. Output 36/40 volt D.C. at 1.2 amps. New, perfect. Price 16/6. P. & P. 3/6.

METERS 500 microamp., 2in. round, with clip, correctly calibrated, 16/6 each. P. & P. 1/-.
200 microamp. F.S.D. 2 1/2 in. proj., calibrated 0 to .5 (50 divisions). Internal resistance 470 ohm. New. Price 29/6 plus 1/- P. & P.

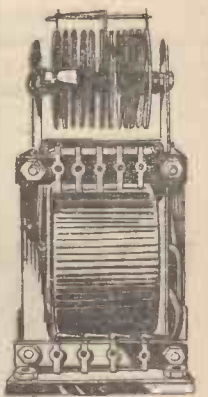

WE ARE EXPERTS AT OVERSEAS PACKING & SHIPPING!
SERVICE TRADING Co.

PERSONAL CALLERS ONLY: 9 Little Newport Street, London, W.C.2. Tel: GER 0576
ALL MAIL ORDERS: (Early Closing Thursday)
47-49 High Street, Kingston-on-Thames.
Telephone: KINGston 4585



EASY

to style

HIGH



impact
resistance

costs

LESS

to produce



LIGHT



in
weight

Fibreform mouldings are made from an exclusive material of strong cellulose fibres bonded with synthetic resins. They are strong—need no smoothing, readily take an air-dried or stove enamel finish or a bonded P.V.C. foil. Because they mould easily and accurately, we can produce quite large and complex forms at low cost.

We make television receiver cabinets and backs—clock cases—car components, nursery trays, and if you examine its possibilities—your new products.

EASILY



finished
with paint

or p.v.c.

foil

specify

fibreform
the fibrous plastic

Fibreform Ltd.

Garratt Mills, Trewint Street, Earlsfield, London, S.W.18. WIM 3946
Midland Factory: Lower Gornal, Nr. Dudley, Worcs. Sedgley 2766

Look at the **NEW**

Incorporating many new features and a greater frequency response.

MOTEK K10
☆☆☆☆☆
TAPE DECK

Patents pending

21GNS



Now restyled in two tones of grey—you must see the new, attractive Motek K.10.

★ Non-slip push buttons.

★ Frequency response better than 40 c/s—12,000 c/s at 7.5" per sec. with extremely low hum pick-up.

★ Enlarged drive wheel on the rev. counter ensures accurate tape positioning.

Please send for brochure of K.10

More and more manufacturers are installing Motek Tape Deck in their recorders.

MODERN TECHNIQUES

Wedmore Street London N19 Tel ARChway 3114

MAKE THE MOST OF YOUR RECORDER

The **Gramian DP4 Microphone** is ideally suited to the recordist requiring a high quality instrument for use with a tape recorder. Designed with a uniform wide frequency response from 50 c/s to 15,000 c/s, it fulfils the needs of Wire, Tape and Disc Recording.

Low, medium or high impedance models are available together with a complete range of stand adaptors, stands, swivel holders, and switch assemblies.

OUTPUT LEVELS:—

DP4/L—25 ohms—
86db below 1 volt/dyne/cm.²

DP4/M—600 ohms—
70db below 1 volt/dyne/cm.²

DP4/H—50,000 ohms—
52db below 1 volt/dyne/cm.²

Retail price DP4/L/pack 1:—low impedance Microphone, complete with connector, 15ft. screened lead, swivel holder and circular base. £8/19/6 (extra for H or M impedance models—£1).

MATCHING UNIT G.7

For use in cases where it is desired to use a low impedance microphone with a recorder or amplifier having a high impedance input. It can also be used in cases where very long microphone leads are necessary. Retail price £3/5/-.

Literature on this and other equipment readily available.



Gramian

GRAMPIAN REPRODUCERS LIMITED

17 Hanworth Trading Estate, Feltham, Middx.

Telephone: Feltham 2657/8

Cables: Reamp, Feltham

C.R.T. ISOLATION TRANSFORMERS

For Cathode Ray Tubes having Heater/Cathode short-circuit and for G.R. Tubes with falling emission. Full instructions supplied.

- Type A. Low Leakage windings. Options: Boost 25% and 50%. Tapped mains primaries. 2 volt 12/6 each, 4 volt 12/6 each, 6.3 volt 12/6 each, 10.8 volt 12/6 each, 13.3 volt 12/6 each

OUR LATEST SUPERIOR PRODUCT. Type A2. High Quality. Low capacity, 10/15 pl. 16/6 each. Optional boost 25%, 50%, 75%. Type B. Basic input. Low capacity. Multi Output 6, 4, 2, 2.3, 10 and 13 volts. Optional boost 25% and 50%. Suitable for all Cathode Ray Tubes. 21/-

RESISTORS. All preferred values. 20% 10 ohms to 10 meg. 1 w. 4d., 1 w. 4d., 1 w. 6d., 1 w. 6d.; 2 w. 1/-, HIGH STABILITY 1 w. 1%, 2 w. 1%, etc. Preferred values 100% to 10 ster. Dito 5%, 9d. to 5 meg., 10d. to 10 meg.

WIRE-WOUND RESISTORS 1/3, 1/6, 2/3, 10 ohms-10,000 ohms 2/3, 15,000 ohms-50,000 ohms 5 w. 1/9; 10 w. 2/3. WIRE-WOUND POTS, 3 w. Standard size Pots, long-slotted knob. Knurled Slotted knob. All values 25 ohms to 25K. 3/- ea., 20 K., 50 K., 4/-.

WIRE-WOUND POTS, 4 w. Standard size Pots, long-slotted knob. All values 100 ohms to 50 K., 6/8; 100 K., 7/6. W/W EXT. SPEAKER CONTROL 100 3/-.

O/P TRANSFORMERS. Heavy Duty 50 mA., 4/6. Multi-ratio push-pull, 7/6. Min. 100 mA., 4/6. Hygrade Push-pull 10 watts, 15/6. Mullard "410" 8k or 8k 30/-.

MAINS TRANSFORMERS 200/250 v. A.C. STANDARD 250-0-250, 90 mA., 6.3 v. 8.5 a. tapped 4 v. 2 a. Rectifier 6.3 v. 1 a., tapped, 5 v. or 4 v. 2 a. Dito 350-0-350. 22/6

ALADDIN FORMERS and cores, 7in. dia.; 7in. 10d. 9in. FORMERS 5927 or 8 and Cans TV1 or 3, 7in. sq. x 2in. or 7in. sq. x 1 1/2in. 2/- with cores.

STOW MOTION DRIVES. Epicyclic ratio 6.1, 2/3. T.H.A. Midge Solenoid Iron, 230 v. 40 w., 16/6. REMPLY INSTRUMENT IRON, 230 v. 25 w., 17/-. MAINS DROPPERS, 3 x 1 1/2in. Three Adj. Sliders, 3 amp. 750 ohms, 4/3. 3 amp., 1,000 ohms, 4/3.

CRYSTAL MIKE INSERT by Acos 6/6. Precision engineered. Size only 1 x 1 1/4in. ACOS CRYSTAL DESK MIKE, Bargain. 35/-.

MIKE TRANSF. 50:1, 3/9 ea.; 100:1 Potted, 10/6. LOUDSPEAKERS P.M. 3 OHM. 6in., Bola 17/6. 6in. x 4in. Bola, 18/-. 7in. x 4in. B.A. 21/-.

I.F. TRANSFORMERS 7/6 pair. 466 kc./sec. sine tuning miniature can 2 1/2 x 1 1/2in. High Q and good bandwidth. By Pye Radio. Data sheet supplied.

CRYSTAL DIODE G.E.C. 2/-, GE334, 4/-, 40 Circuits, 3/-.

TWIN GANG CONDENSERS. 365 pf. Miniature, 1 1/2in. x 1 1/2in. 10/-, .006 Standard with trimmers, 9/-.

VALVE HOLDERS. Pa. int. Oct. 4d. EF50, EA50, 6d. S18A, 6/1.3. Eng. and Amer. 4, 5, 6, 7 pin, 1/-.

WAVECHANGING SWITCHES. 2 p. 2-way, 3 p. 2-way, short spindle 2/3. 2 p. 4-way, 2 water, long spindle 1/6. 2 p. 6-way, 4 p. 2-way, 4 p. 3-way, long spindle 3/6.

EDISWAN TRANSISTORS JUNCTION TYPE P.N.P. AUDIO XB102, for amplifiers, and output stages up to 350 milliwatts in push-pull. PRICE 10/-

EDISWAN TRANSISTORS JUNCTION TYPE P.N.P. AUDIO XB102, for amplifiers, and output stages up to 350 milliwatts in push-pull. PRICE 10/-

EDISWAN TRANSISTORS JUNCTION TYPE P.N.P. AUDIO XB102, for amplifiers, and output stages up to 350 milliwatts in push-pull. PRICE 10/-

EDISWAN TRANSISTORS JUNCTION TYPE P.N.P. AUDIO XB102, for amplifiers, and output stages up to 350 milliwatts in push-pull. PRICE 10/-

EDISWAN TRANSISTORS JUNCTION TYPE P.N.P. AUDIO XB102, for amplifiers, and output stages up to 350 milliwatts in push-pull. PRICE 10/-

EDISWAN TRANSISTORS JUNCTION TYPE P.N.P. AUDIO XB102, for amplifiers, and output stages up to 350 milliwatts in push-pull. PRICE 10/-

EDISWAN TRANSISTORS JUNCTION TYPE P.N.P. AUDIO XB102, for amplifiers, and output stages up to 350 milliwatts in push-pull. PRICE 10/-

1959 RADIOGRAM CHASSIS



THREE WAVEBANDS M.W. 18 m. -50 m. M.W. 200m. -550 m. L.W. 800 m. -2,000 m. FIVE VALVES LATEST MULLARD ECH81, EF89, EBC81, EL84, EZ80, 13 month Guarantee. A.C. 200/250 v., 4-way switch. Short-Medium-Long-gram. A.V.C. and Negative Feedback, 4.2 watts. Chassis 13 1/2in. x 5 1/2in. x 2 1/2in. Feed Dial Size 10 x 4 1/2in. horizontal or vertical. 2 Pilot Lamps. Four Knobs. Walnut or Ivory, aligned and calibrated. Chassis isolated from mains.

BRAND NEW £9.10.0 Carr. 4/6. TERMS: Deposit £5/5 and 5 monthly payments of £1. MATCHED SPEAKERS 8in., 17/6; 10in., 25/-; 12in. 30/-.


SUPERIOR FM-AM MODEL Six Mullard Valves, EC085, ECH81, EF89, EAB030, EL84, EZ80, V.H.F. 109-87 Mc/s. Med. 190-550 m. Long 1000-1900 m. Gram input. Ready for use. A.C. Mains 200/250 v. Isolated chassis. Output point for use as Hi-Fi Tuner. 13 month guarantee. Circuit supplied. Leaflet S.A.B.

£18-19-6 Carr. 5/6. GARRARD 4-SPEED RECORD CHANGERS RC121/D MKII MODELS

Brand new and fully guaranteed 12 months. AUDIO PERFECTION

Designed to play 18, 33, 45, 78 r.p.m. Records 7in. 10in., 12in. With play-in NORMAL HEAD. OUR PRICE £10.10.0 STEREO HEAD £2 extra

LATEST COLLARO AUTOCHANGER £7-19-6



STUDIO 'O' Pick-up. 4 Speeds - 10 Records

Or With Cabinet, Amplifier and Speaker £11-19-6 Carr. 5/6.

B.S.R. MONARCH UA8 4-SPEED AUTOMATIC RECORD CHANGERS

Brand new and fully guaranteed 12 months. OUR PRICE £6.19.6 post free

STEREO MODELS UA8, £8/19/6, UA12, £10/10/-

AUTOCHANGER ACCESSORIES Suitable player cabinets (uncut boards) ... 49/6

Amplifier player cabinets with cut boards 63/- 2 valve amplifier and 6 1/2in. speaker for above 79/6

3 valve amplifier and 6 1/2in. speaker for above 95/- Wired and tested ready for use.

GARRARD 4-SPEED SINGLE RECORD PLAYER 4SP £7.10s. AUDIO PERFECTION POST FREE

MODEL TA MK II £8-10 Stereo Heads MODEL 4 HF £18 £2 extra.

Transidyne Superhet Six £11.19.6 T.C.C. Printed Circuit, internal Ferrite aerial, Rolz loudspeaker, push-pull output. All parts, cabinet 6 x 4 x 1 1/2in. Ediswan transistors.

THE HI-GAIN BAND 3 PRE-AMP Cascade circuit using Valve ECC84. 17db gain. Kit 29/6 less power; or 49/6 with power pack kit. Plans only 6d. Also Band 1 version same Prices.

Volume Controls 80 ohm Cable Coaxial

Midjet size. Long spindle. Guaranteed 1 year. All values 3 K. ohms up to 2 Meg. No Switch. D.P. Sw. 3/- 4/9 Linear or Log Tracks. Semi-air spaced Polythene insulated 1/4 in. dia. Stranded core. Ideal Band III 9d. Losses cut 50% 1/6 yd. FRINGE QUALITY AIRSPACED 1/6 yd.

COAXIAL PLUGS 1/- LEAD SOCKETS 2/- PANEL SOCKETS 1/- OUTLET BOXES 4/6 BALANCED TWIN FEEDER per yd. 6/6 300 or 300/1. TWIN SCREENED BALANCED FEEDER 1/6 yd., 80 ohm.

ALUMINIUM CHASSIS. 13 a.w.g. Plain, undrilled with 4 sides, riveted corners and lattice fixing holes, with 2 1/2in. sides, 7 x 4in., 4/6; 0 x 7in., 5/8; 11 x 7in. 6/8; 13 x 9in., 8/6; 14 x 1 1/2in., 10/6; 15 x 1 1/2in., 12/6 and 18 x 1 1/2in., 16/6.

BLACK CRACKLE PAINT. Air drying, 3/- tin. P.V.C. CONN. WIRE, 8 colours, single or stranded, 2d. yd. NEON MAINS TESTER SCREWDRIVER, 5/- CORED SOLDER RADIOGRADE 3 yds. 9d., 1lb. 2/6 PAXOLIN 1/15in. 8in. x 10in., 1/6. ION TRAP 5/-

"GEVAERT GEVASONOR" 50% Extra Long Plastic Tape, 1,700ft. 7in. Reel 35/-, 860ft. 5in. Reel 21/- SUPERIOR 1,200ft. 7in. Plastic Tape 24/- 600ft. 5in. 15/-, All Spare Reels 3/- each.

LONG PLAY 5 1/2in. 1,200ft. 28/-, 3in. 225ft. 7/6. "INSTANT" Bulk Tape Eraser and Head Demagnetiser: 200/250 v. A.C. 27/6.

SENERCEL RECTIFIERS. E.H.T. TYPE FLY BACK VOLTAGE: K3/25 2 kV., 5/-; K3/40 3.2 kV., 7/-; K3/50 4 kV., 8/-; K3/100 8 kV., 14/6

50 c.p.s. Voltage 20% of above. MAINS TYPE. R.M.I. 125 v., 60 mA., 5/-; R.M.2, 100 mA. 6/-; R.M.3, 120 mA., 8/-; R.M.4, 250 v. 275 mA. 16/-.

MINIATURE CONTACT COOLED RECTIFIERS. 250 v. 50 mA., 7/6; 60 mA., 8/6; 85 mA., 9/6; 200 mA., 21/-; 300 mA., 27/6; Full Wave 130 mA., 15/-.

COILS. "Write P" type, 3/- each. Osmor Midget "Q" type adj. dust core from 4/- each. All ranges. TELETRON. L. and M. T.R.F. with reaction, 3/6. FERRITE ROD AERIALS. M.W. 8/6; M. & L. 12/6 T.R.F. COILS A/H/F, 7/- pair. H/F CHOKE, 2/6.

JASON F.M. TUNER COIL SET, 26/-. H.F. coil, aerial coil, Oscillator coil, two I.F. transformers 10.7 Mc/s. Detector transformer and heater choke. Circuit and component book using four 6AM6 2/8. Complete kit with Jason Calibrated dial and 4 valves ... £6/15/-.

With new Jason Cabinet 20/- extra. Mullard 3-3 quality Amplifier. Ready built, 27/17/6.

CONDENSERS. New Stock. .001 mid. 7 kV. T.C.C. 5/8. 20 kV. 8/6. 7 kV. 9/8. 100 pf. to 50 pf. Micar. 6d. Tubular 50 v. .001 to .01 mid., 9d.; .05 1 1/2; .25 1/6; .5 1/9; 1/350 v., 9d.; 0.1 mid., 2/000 v., 3/6; .001 mid., 2,000 v. 1/9.

CERAMIC CONDS. 500 v., 3 pf. to .01 mid., 5d. SILVER MICA CONDENSERS. 10% 5 pf. to 500 pf., 1/-; 500 pf. to 3,000 pf., 1/6.

CLOSE TOLERANCE 1/2 pf. to 1.5 pf. to 47 pf., 1/6. DITO 1 1/2 pf. to 815 pf. 1/8; 1,000 pf. to 5,000 pf. 2/-. TRIMMERS. Ceramic, 30, 50, 70 pf., 9d.; 100 pf., 150 pf. 1/8. 250 pf., 1/8. 600 pf. 50 pf. 1/8. Phillips, 1/- ea.

NEW ELECTROLYTICS. FAMOUS MAKES TUBULAR TUBULAR CAN TYPES

Table with columns for Tubular, Tubular, and Can Types, listing various capacitor models and prices.

FULL WAVE BRIDGE/SELENIUM RECTIFIERS. 2, 6 or 12 v. 1 1/2 amp., 8/9; 2 a. 11/3; 4 a. 17/6; 6 a. 22/6.

CHARGER TRANSFORMERS. Tapped input 200/250 v. for charging at 3, 6 or 12 v. 1 1/2 a., 15/6; 2 a., 17/6; 4 a., 22/6. Charger circuit free. AMPMETERS, 4 a. and 9 a., 14/6

NEW and boxed VALVES 60-day guarantee


Table listing various vacuum tube valves and their prices.

RADIO COMPONENT SPECIALISTS

OUR ONLY ADDRESS 337 WHITEHORSE RD., WEST CROYDON

POSTAL SERVICE 1/-, OVER £2 FREE. C.O.D. 1/6 (EXPORT C.W.O. POST EXTRA.) Wed. 1 p.m. Catalogue 1/6. THO. 1665. Buses 133 or 68

FACE VALUE

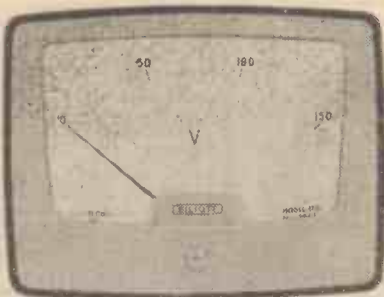

The face of an Elliott switchboard instrument is more than just the end of an instrumentation system—it is the vital link between it and human consciousness.

Easy on the eye, certainly—but these rectangular faces with their serene black-and-grey styling are more than merely attractive. The scale is the longest practicable, consistent with case size; the calibration divisions are the fewest compatible with the values to be read.

As with every other item and component of Elliott instrumentation systems these instruments are designed and built with one aim: absolute functional efficiency.

Model No.	Movement	Barrel Dia.	Case Size	Scale Length	Amps.	Volts
2705	Moving Coil	2½"	4½"–3½"	3.40"	50μA –1000A	50mV– 1000V
2706	Moving Iron	2½"	4½"–3½"	3.10"	15mA –50 A	10V– 300V
3705	Moving Coil	3½"	5½"–4½"	4.20"	50μA –1000A	50mV– 1000V
3706	Moving Iron	3½"	5½"–4½"	3.80"	15mA –50 A	10V– 300V

ELLIOTT

If you use instruments you must know about Elliotts.

Instruments for Prototype equipment—7 days delivery

Elliott Brothers (London) Limited, Century Works, Lewisham, London, S.E.13. Telephone: TIDEWAY 1271

A Member of the Elliott-Automation Group



ELECTRONIC COMPONENT DISTRIBUTORS FOR OVER 25 YEARS

BLANK CHASSIS

Precision made in our own works from commercial quality half-hard aluminium of 16 s.w.g. (1/16in.) thickness, these chassis go all over the world (and off it—in rockets!). Same day service for ANY SIZE, to nearest 1/16in. and up to 17in. of straightforward two, three or four-sided chassis. Specials dealt with promptly.

SOLDERED CORNERS

While these chassis, owing to their thickness, hardness and efficient folding, will carry components of considerable weight and normally require no corner strengthening, we can do this by a special soldering technique at 6d. extra for each corner.

FLANGES

¼in., ½in. or ¾in. flanges (inside or outside) 6d. extra for each bend.

PRICE GUIDE (normal chassis only)

Work out total area of material required, including waste, and refer to table below:

48 sq. in.	4/-	176 sq. in.	8/-	304 sq. in.	12/-
80 sq. in.	5/-	208 sq. in.	9/-	336 sq. in.	13/-
112 sq. in.	6/-	240 sq. in.	10/-	368 sq. in.	14/-
144 sq. in.	7/-	272 sq. in.	11/-	and pro rata	
	Post 1/3		Post 1/6		Post 1/9

Discount for quantities. Trade enquiries invited. Spray finished arranged for quantities of 25 or over.

PANELS

The same material can be supplied for panels, screens, etc. Any size up to 3ft. at 4/6 sq. ft. (sq. in. x ½) Post, up to 72 sq in. 9d., 108 sq in. 1/3, 144 sq. in. 1/6, 432 sq. in. 1/9, 576 sq. in. 2/-.

287/289 EDGWARE ROAD, LONDON, W.2.
Telephone: PAD 5891/7595

RECO KITS



"RECO" MIDDY ONE TRANSISTOR KIT

(M/L or M/S Waves.) Size 4½in. x 3½in. x ½in. Variable sensitivity control Vari Q ferrite rod aerial. "Sonotone" min. dynamic earpiece with insert. Months of listening pleasure from pencil battery. Complete kit with Ediswan transistor and easy build diagrams 37/6. P.P. 2/-

"RECO" PUSH-PULL FIVE KIT

(M/L Waves & Trawler Band. (size: 6½in x 4½in x 1½in)

As the Transigen Three but with Push-Pull output stage. Uses five transistors, including MULLARD OC45 and EDISWAN Transistors. New improved 3in speaker. Complete kit 28/7/6. P.P. 2/6. Easy build practical wiring diagrams free with kit.



"RECO" TRANSIGEN THREE KIT

(M/L Waves and Trawler Band.)


Entirely self contained (no external aerial required), E.F. stage with MULLARD OC45 and two EDISWAN transistors. Combined volume and sensitivity control.

On test (50 miles from London) tuned in the Home, Light, Third and in the evening Radio Luxembourg, A.F.N. and many others. Attractive pale blue polystyrene case with red grille. This receiver will operate a speaker in good reception areas. Complete kit with easy build diagrams and battery, 75/-. P.P. 2/6.

"RECO" TRANSIGEN TWO KIT

(M/L waves)

Oscillating detector stage for sensitivity. Fine for good reception areas. Has combined volume/sensitivity control. Complete kit with 3-volt pencil, easy build diagrams and EDISWAN TRANSISTORS, 59/6. P.P. 2/6.



"RECO" PUSH-PULL FOUR KIT

(M/L or M/S Waves)

Four EDISWAN transistors. Volume control. 3in. speaker (now mounted at end of case and not as shown). Gleaming pale blue polystyrene case with red speaker grille. Complete kit with easy build diagrams and battery, 25/5/-. P.P. 2/6.

Parts price list and circuits for the above kits 2/6 set of four.

AFTER SALES SERVICE

RADIO EXCHANGE COMPANY

(Dept. W.W.)


27 Harpur Street, BEDFORD.

Closed 1 o/c Saturdays

Telephone Bedford 2367

Lee Electronics

TYPE RECORDER & HI-FI AUDIO SPECIALISTS

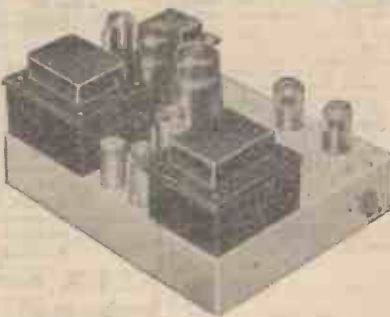

25-watt High-Fidelity Amplifiers by world-famous manufacturers listed at 28 gns.

Special Offer:—in sealed cartons at 15 gns. each—with guarantee and instruction book, carriage 5/- extra.

Suitable for use with all types of stereo and monaural pre-amps. Brief specification—flat frequency response from 2 to 160,000 kc/s per sec. Distortion less than .1 at 15 watts, less than .3 at 25 watts. Gramophone test report on application. Pamphonic 1004 Hi-Fi 10-watt shelf-mounting amplifiers. Listed at 25gns. Offered at 15 gns.

Both the above items can be demonstrated at our Edgware Showrooms.

SEND FOR FREE LISTS H.P. TERMS

400 EDGWARE RD., W.2, PADDINGTON 5521

TRADE ENQUIRIES INVITED

Premier RADIO

23 TOTTENHAM COURT RD., LONDON W1. Tel.: MUSEum 3451/2

★ VISIT OUR NEW BRANCH AT 309 EDGWARE RD., W.2. TEL: PADington 6963



THE *Petite*
PORTABLE
MAY BE BUILT FOR **£7-7-0**

plus 3/- post & pkg.
Batteries extra.
H.T. 10/- (Type B126) or equivalent.
LT 1/6 (Type AD 35) or equivalent.

- ★ High Q frame aeriols.
- ★ High sensitivity on both wavebands.
- ★ Medium and long wave superhet circuit.
- ★ Instruction book 1/6.

- ★ Size only 8in. x 8in. x 4½in.
- ★ 4 valves of the economy type.

★ Weight including batteries 5½lb.

RECORD CHANGERS

B.S.R. Monarch U.A.8. 4-speed auto changer	...	£6 19 6
Collaro Conquest 4-speed auto changer	...	£7 19 6
Garrard R.C. 120 M.K.2 4-speed auto changer	...	£8 19 6

Postage and packing on above units 5/- each.

PREMIER BATTERY ELIMINATOR



Housed in two containers which are to replace AD 35 and B126 Batteries.
MAY BE BUILT FOR **37/6**
Plus 2/- P. & P.
Only suitable for use with DK96 Series valves.

THE "MID-FI"
A NEW DESIGN 4
WATT AMPLIFIER
KIT

MAY BE BUILT FOR **95/-**
Plus 3/- P. & P.



A new circuit for the home constructor requiring a good-quality medium-powered Amplifier for reproduction of Records of F.M. Broadcasts. Technical Specifications: separate bass and treble controls. Valve line-up EF86, EL84, EZ80. Voltage adjustment for A.C. mains from 200/250 volt, 3 or 15 ohms impedance. Negative feedback. Size 7 x 5 x 2in., overall height 5in. Silver-hammered finished Chassis.



**THE VERDIK
QUALITY TEN
AMPLIFIER AND PRE-AMPLIFIER**

A truly High-Fidelity Ultralinear Amplifier with a push-pull output of 10 watts and incorporating negative feedback. Provision for Tuner, also bass and treble control and S-position selector switch for Microphone, Radio Tape and L.P. & Standard Recordings. Finished in an attractive grey/green stove enamel. **FOR A LIMITED PERIOD ONLY £14/19/6**
Original cost 23gns P. & P. 7/6

ALL THESE GOODS
CAN BE
DESPATCHED
FROM STOCK
WITHIN 24 HRS.



THE "CLARION"
Transistorised miniature battery-operated
TAPE RECORDER

- ★ Completely transistorised circuit.
- ★ Constant governed speed of 3½ I.P.S.
- ★ Recordings interchangeable with other recorders.
- ★ Remarkable reproduction on both speech and music.

Price complete with Microphone and tape— **25 Gns.** plus 5/- P. & P.

HI-FI SPEAKER A 12in. Loudspeaker of high-fidelity quality, made by a famous manufacturer, 15 ohms impedance, 15,000 lines, with cloth suspended cone. Price **59/6** plus 2/6 P. & P.

★ Replacement components for the MAYFAIR Telesvisor. Available from Stock.

Unrepeatable Bargains!!!

THE FAMOUS COSSOR 3 WATT AUDIO AMPLIFIER KIT 562K

ORIGINAL PRICE £9/15/0
OUR PRICE **£5/19/6** P. & P. 2/6

This Kit assembled will provide a compact versatile Amplifier which incorporates the most up-to-date pre-assembled printed circuit and is suitable for operation from Radio, Microphone or Gramophone. The circuit design includes negative feedback, valve line-up 6V4, 6BQ5, EF86. Two Loudspeakers are used, i.e., 10x6in. Elliptical and 4in. Treble, ensuring high quality output, suitable for use on 200/250 v. A.C. mains. All items are supplied, including Loudspeakers, Knobs and Escutcheon, with full assembly instructions and in makers original carton.



THE COSSOR PRINTED CIRCUIT MODEL 701K VHF/FM Radio Receiver kit

ORIGINAL PRICE 15 Gns.
OUR PRICE **£8/19/6** P. & P. 2/6

This Kit is easily assembled and will provide a complete Radio Receiver for reception of VHF/FM transmission. The Receiver utilises the latest type printed circuit, for use on A.C. or D.C. mains, incorporating UCC85, UF89, UF89, UABC80, UL84, UY85 Valves. All components are supplied including a Goodmans 10x6in. Elliptical Speaker, full assembly instructions and presented in manufacturers original cartons.



POCKET TEST METERS—Truly efficient meters for the enthusiast

CABY MULTI-METER A-10
DC/V 10-50-250-500-1kΩ (2kΩ/V)
AC/V 10-50-250-500-1kΩ (2kΩ/V)
Ranges: DC/MA 0.5-25-250 (250mV)
OHM 0-10 kΩ-1MΩ.
Complete with test leads **£4/19/6**. P. & P. 2/6.

ALFA RADIO TEST METER
3333Ω per volt.
DC/V 6-12-60-300-12000 V.
Ranges: AC/V 6-12-60-300-12000V.
DC/MA 300 μA-30mA-300mA.
Complete with test leads **£5/19/6**. P. & P. 2/6.

NO ELECTRICITY?

Here's your answer

**THE
BEREC**



BATTERY RECEIVER
For **99/6** plus 5/- P. & P. or **£1/0/0** Deposit and 5 monthly repayments of 19/-


This receiver is ideally suitable for use in the home or where normal electricity supply is not available, remarkable reception on both medium and short wavebands, incorporating the following latest-type miniature Battery Valves; DK92, DF96, DAF96, DL96 and operates on an external B.103 Battery or equivalent. The receiver is housed in an attractive two-tone metal case. Size 11½ x 7½ x 5½in.
This receiver can also be supplied with 2 short wavebands instead of medium and short, covering 2.5-7 Mc/s. and 6.5-17 Mc/s. Price 79/6.

H.P. TERMS TO SUIT YOUR POCKET!

Manufacturer's Surplus Bargain 7 VALVE AM/FM RADIOGRAM CHASSIS

Valve Line-up: ECC85, ECH81, EF89, EABC80, EL84, EM81, EZ80

Three Waveband and Switched Gram positions. Med. 200-500 m., Long 1,000-2,000 m., VHF/FM 88-95 Mc/s. Philips Continental Tuning insert with permeability tuning on FM and combined AM/FM IF transformers. 460 Kcs and 10.7 Mc/s. Dust core tuning all coils. Latest circuitry including AVC and Neg. Feedback. Magic Eye 'Spot-on' Tuning. Three watt output. Sensitivity and reproduction of a very high standard. Chassis size 13½ x 8½ in. Height 7½ in. Edge illuminated glass dial 11½ x 8½ in. Vertical pointer. Horizontal station names. Gold on brown background. A.C. 200/250 v. operation.



Bargain **£13.10.0**

Aligned and tested ready for use **£13.10.0** Carr. & Ins. 5/-
Complete with 4 Knobs—walnut or Ivory to choice.
Three ohm P.M. speaker only required. Recommended quality speakers.
8in. Goodmans special cone 21/6. 10in. Rola (Heavy Duty) 30/-. Post & Pkg. 1/6.

RE-GUNNED TV TUBES NEW REDUCED PRICES

... and now 12 months guarantee!

All tubes rebuilt with new heater, cathode and gun assembly—reconditioned virtually as new.

12in. £6, 14in. £7, 17in. £8.10.0, etc.

10/- part exchange allowance on old tube

Carr. and ins. 10/-. Comprehensive stocks—quick delivery

80 OHM COAX. CABLE NOW ONLY 8d. YARD

Highest Quality Cable low-loss Polythene Aerial semi-air spaced feeder losses out 50%. Standard 1/4 in. dia. Stranded core. 20 yds. 12/6, carr. 1/6. 40 yds. 22/6, carr. 2/-. 60 yds. 32/6, carr. 3/-. Coax. Plugs 1/-. Coax. Sockets 1/-. Couplers 1/3. Outlet Boxes 4/6. BL-33 Xover Unit 7/6.

Electrolytics All Types New Stock TUBULAR CAN TYPES

25/25 v. 50/12 v. 1/9	8+8/450 v. 4/6
50/50v.100/25v. 2/-	32+32/275 v. 4/6
8/450 v. 2/3	50+50/350 v. 6/6
18+18/450 v. 5/6	60+250/275 v.12/6
32+32/450 v. 6/6	100+200/275v.12/6

Comprehensive range in stock.

REDUCED VALVES FULLY GUARANTEED

1B6, 1T4 7/6	DK96 9/-	EZ81 7/6
1B5 7/6	DL96 9/-	PCC84 10/6
3B4, 8V6 8/-	ECL80 10/6	PCP80 10/6
MU14 9/6	ECL82 9/6	PCL83 12/6
5Z4 9/6	EF90 9/6	PL51 12/6
6K8 8/6	EF96 13/6	PL82 9/6
Q67 8/6	EL41 10/6	PL83 11/6
6V6 7/6	EL84 9/6	PY90 7/6
DAF96 9/-	EY61 10/-	PY92 7/6
DP96 9/-	EY85 10/-	U26 12/6

Etc., Etc., Comprehensive Stocks

RECORD PLAYER BARGAINS

SINGLE PLAYERS. B.S.R. (TU9) 90/-; Collaro (4/564) 6 gns; Garrard (4SP) £7.10.-. Carr. and ins. 3/6.

AUTO CHANGERS. B.S.R. (UA8) £6.19.6; Collaro (Conquest) £7.19.6; Garrard (RC121/4D/Mk2) Plug in head and stereo adapted 10 gns. Carr. and ins. 4/6.

RECORD PLAYER CABINETS. Contemporary styled 18in. x 13in. x 8in. 3 gns. Carr. and ins. 3/6. 2 valve, 2 stage, 2-watt amplifier to fit above cabinet, complete 6in. speaker ready wired £3.19.6. P. & P. 2/6. Send for full bargain list and details

CONDENSERS—Silver Mica. All pre-values, 3 pf. to 1,000 pf., 6d. each. Ditto. ceramic 8d. each. Tubulars 450 v. T.C.C. etc., .001 mfd.-.01 and 1/350 v., 9d. each. .02-1/500 v. 1/- each. 25 Hums 1/6, 5 T.C.C. 1/8, .001 6 kv., 5/6, .001 20 kv., 8/6.

RESISTORS—FULL RANGE 10 ohms.—10 megohms 20% 1 w. and 1/2 w. 3d., 1 w. 5d., (Midget type modern rating). 1 w. 6d., 2 w., 9d., 10% HI-STAB, 1 w., 5d., 1 w., 7d., 5% 1 w., 9d., 1% HI-STAB, 1/2 w. 1/6 (10-100 ohms 2/-).

PRE-SET W/W POTS. T/V Type. 25 ohms—50 K ohms. 3/- 50K—2 Meg. (Carbon, 3/-).

SPEAKER FRET—Expanded Bronze anodised metal 8 x 8in., 2/3; 12 x 8in., 3/-; 12 x 12in., 4/6; 12 x 16in., 6/-; 24 x 12in., 9/-; 36 x 12in., 13/6, etc., etc.

TYGAN FRET (Contemporary pat.) 12 x 12in., 2/-; 12 x 18in., 3/-; 12 x 24in., 4/-, etc.

LOUDSPEAKERS—P.M. 3 ohms, 2½ in. Elac. 17/6. 3½ in. Goodmans, 18/6; 6in. Rola, 17/6. 6in. Elac 18/6; 7½ in. Goodmans Elliptical, 18/6; 8in. Rola, 20/-; 10in. E. and A., 25/-; 10in. WB-HF102, 99/9; 12in. Plessey 15 ohms with 6 x 4in. Tweeter and Cross Over Filter, 97/6.

2 WAVEBAND CAR RADIO KIT

12 v. operation. Med & Long Waves

Modern development of the famous Brimar Hybrid vibratorless car radio circuit. Five latest type Brimar low voltage valves and 2-watt power transistor. B.F. stage and permeability pre-aligned Cydon Tuner Unit provides extremely good sensitivity and signal/noise ratio. Printed circuit for easy construction and 7 x 4in. elliptical speaker for fidelity output. Self-contained in neat metal cabinet 8 x 7 x 2½ in. with attractive calibrated dial. Speaker and power transistor stage mounted separately, approx. 8 x 5 x 3in.



Recommended Complete Kit. Buy (incl. speaker, etc.) Bargain Price **£12.19.6**
Instruction booklet and parts list available 3/6 post free. P. & P. 3/6.

ONLY A FEW ITEMS ARE LISTED FROM OUR COMPREHENSIVE STOCK. WRITE NOW FOR FULL BARGAIN LISTS, 3d.


Terms: C.W.O. or C.O.D. post and packing up to ½ lb. 7d.; 1 lb. 1/1; 3 lb. 1/6; 5 lb. 2/-; 10 lb. 2/9.

TRS RADIO COMPONENT SPECIALISTS

70 BRIGSTOCK RD., THORNTON HEATH, SURREY
Established 1946 Tel: TWO 2186 Hours: 9 a.m.—6 p.m. 1 p.m. Wednesday.

STEREO £7.7.0

Independent twin channel amplifier with excess of 3 watts per channel.
Concentric volume control (optimum balance arranged immediately without additional knobs).
Choice of volume and tone controls separately fixed or integral with chassis and having continental styled knobs (brown and gold).
Stoved grey or blue hammer chassis 9½ in. x 5½ in. x 6 in.
Input suiting most modern crystals; output matching 3 ohm speaker each channel.
For operation on AC mains 200/250 v.

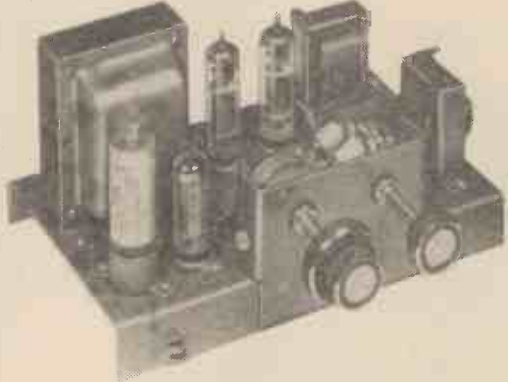

E.K.E.

BROTHERTON, KNOTTINGLEY, YORKS.

If your local dealer has not one in stock we will gladly loan him one for you to hear.

Unique Opportunity to Acquire... 0-5000 VOLT INSULATION TESTER

AT
ONLY A
THIRD
OF THE
COST!



Unique opportunity to acquire 5,000 volt insulation tester at only 1/3rd of cost. 0-5,000 v. output, A.C. or D.C., continuously variable by variac, leakage indication by magic eye. Input voltage 200-250 v. A.C. Weight 30lb. Dimensions 18 x 18 x 13in. Meter reads on both A.C. and D.C. ranges. Micro switch fitted in one test prod, controlling input for absolute safety. Output current 5 m.a. max. D.C., 10 m/a. A.C. These laboratory grade instruments cost £75 new, are in original tropical packing case, with inner instrument case, and are absolutely brand new and unopened.

PRICE £24 only cash refunded if not entirely satisfied.

R. SANKEY, PICTUREDROME, ATHERSTONE, WARWICKS.
Telephone:—Atherstone 3210/3202.




FOR VALVES, TUBES AND COMPONENTS : BY RETURN POST SERVICE

VALVES		Guaranteed		All Tested		Before		Dispatch										
ACHLDDD	ECC83	9/-	EZ40	7/6	PCF80	9/6	U301	23/3	Z359	7/6	6BA6	7/6	6SK7	6/-	12K8GT	12/6	1428T	3/6
AC/P	ECC84	10/-	EZ41	7/6	PCF82	12/6	U339	12/-	1A3	3/6	6BE6	8/-	6SL7GT	8/-	12Q7GT	7/6	1858T	33/2
ACSPEND	ECC85	7/6	EZ80	7/-	PCL82	12/-	U403	16/7	1A5GT	6/-	6BG6G	23/3	6SN7GT	7/6	12S7G	7/6	210DDT	4/6
	ECC86	12/-	EZ81	7/-	PCL83	14/6	U404	11/4	1A7GT	12/6	6BH6	9/-	6SQ7	9/3	12SH7	6/-	210VPT	3/6
	ECC87	13/-	EZ90	7/6	PL38	17/6	U801	29/10	1C2	11/6	6BJ6	9/-	6U4GT	12/-	12SJ7	6/-	83	10/-
AC6PEN	ECC88	26/6	E1148	2/-	PL36	15/-	UABC80	10/-	1C5GT	12/6	6BR7	12/6	6U5/6G5	17/3	12SK7	6/-	301	10/6
ACVP1/5	ECC89	10/-	E1148	2/-	PL81	12/6	UAF42	9/6	1D5	12/6	6BW6	9/-	6U5G	8/6	12SL7	8/-	302	10/6
ATP4	ECC90	3/6	E1148	2/-	PL82	8/6	UBC41	9/6	1D6	12/6	6BW7	8/6	6U7G	8/6	12SN7GT	13/-	304	10/6
AZ1	ECC91	10/-	E1148	2/-	PL83	11/6	UBF80	9/6	1H5GT	10/6	6C4	6/-	6V6G	6/-	12SQ7	8/6	305	10/6
AZ31	ECC92	12/-	E1148	2/-	PX25	12/6	UCC84	10/11	1LD5	3/6	6C6	5/-	6V6GT	7/9	1457	17/6	306	10/6
AZ41	ECC93	13/-	E1148	2/-	PY80	7/6	UCC85	10/6	1IN5	10/6	6C31	7/6	6X4	7/6	15D2	7/9	807	2/6
B36	ECC94	15/-	E1148	2/-	PY81	8/6	UCF80	16/7	1IR5	8/-	6CD6G	29/10	6X5G	7/9	19A05	9/9	954	4/6
CI	ECC95	12/6	E1148	2/-	PY82	7/-	UCH42	10/6	1IS4	10/6	6D6	5/-	6X5GT	7/9	19B6G	23/3	955	4/6
CLB1	ECC96	23/3	E1148	2/-	PY83	8/6	UCH81	10/6	1IS4	10/6	6D6	5/-	6X5GT	7/9	19B6G	23/3	956	3/6
CCH35	ECC97	23/3	E1148	2/-	PZ30	19/11	UCL82	16/7	1IS5	7/6	6CH6	10/6	6X5GT	7/9	19B6G	23/3	957	3/6
CL33	ECC98	19/3	E1148	2/-	PC40	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	958	3/6
CY31	ECC99	16/7	E1148	2/-	PC41	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	959	3/6
CV73	ECC100	6/-	E1148	2/-	PC42	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	960	3/6
C36A	ECC101	6/6	E1148	2/-	PC43	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	961	3/6
D77	ECC102	6/6	E1148	2/-	PC44	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	962	3/6
DAF96	ECC103	8/9	E1148	2/-	PC45	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	963	3/6
DF96	ECC104	8/9	E1148	2/-	PC46	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	964	3/6
HD63	ECC105	9/-	E1148	2/-	PC47	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	965	3/6
DK96	ECC106	8/9	E1148	2/-	PC48	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	966	3/6
DL96	ECC107	8/9	E1148	2/-	PC49	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	967	3/6
DM70	ECC108	7/6	E1148	2/-	PC50	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	968	3/6
EA50	ECC109	1/6	E1148	2/-	PC51	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	969	3/6
EABC80	ECC110	9/-	E1148	2/-	PC52	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	970	3/6
EAF42	ECC111	10/6	E1148	2/-	PC53	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	971	3/6
E834	ECC112	2/-	E1148	2/-	PC54	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	972	3/6
E841	ECC113	8/6	E1148	2/-	PC55	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	973	3/6
EBC33	ECC114	6/9	E1148	2/-	PC56	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	974	3/6
EBC41	ECC115	9/6	E1148	2/-	PC57	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	975	3/6
EBC96	ECC116	9/6	E1148	2/-	PC58	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	976	3/6
EBF80	ECC117	9/6	E1148	2/-	PC59	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	977	3/6
EBF89	ECC118	9/6	E1148	2/-	PC60	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	978	3/6
EBL21	ECC119	23/3	E1148	2/-	PC61	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	979	3/6
EBL31	ECC120	23/3	E1148	2/-	PC62	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	980	3/6
ECC31	ECC121	7/6	E1148	2/-	PC63	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	981	3/6
ECC81	ECC122	8/-	E1148	2/-	PC64	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	982	3/6
ECC82	ECC123	7/6	E1148	2/-	PC65	15/-	UCL83	12/6	1IT4	6/6	6F6G	7/6	6X5GT	7/9	19B6G	23/3	983	3/6

METAL RECTIFIERS FOR RADIO AND TV

S.T.C.
 RMI 8/6
 RM2 6/9
 RM3 7/6
 RM4 16/-
 RM5 19/6
 K3/50 7/6
 K3/60 8/-
 K8/100 12/6

Westing-house
 14A86 17/6
 14A97 17/6
 14A100 19/6
 LW7 21/-
 12RA-1-2-8-2 17/6
 14RA-1-2-8-1 21/-
 18RA-1-1-16-1 6/6



RECTIFIERS FOR BATTERY CHARGERS
 12 v. 1 amp. 4/3 12 v. 2 amp. 7/-
 12 v. 3 amp. 10/- 12 v. 4 amp. 12/6
 12 v. 5 amp. 14/6

TRANSFORMERS FOR ABOVE
 2 amp. 13/6, 4 amp. 18/6.

AUTOMATIC CHANGER UNITS

B.S.R. UAB, 4-speed Mixer Automatic changer, manual and auto-control complete with latest B.S.R. "ful-fi" pickup. Carriage and packing 3/6. OUR PRICE £6/19/6.

The new B.S.R. Model UA12, 4-speed Mixer Automatic record changer, fitted with latest type turnover cartridge. OUR PRICE £8/17/6. Carriage 3/6.

The latest Collaro Conquest, 4-speed auto-changer, in cream with Studio "O" insert. Brand new, fully guaranteed. £7/19/6 plus packing and post 3/6.

Collaro, 4-speed single player unit with automatic stop, cream, turnover crystal cartridge, brand new and guaranteed. £6/19/6.

ACOS MICROPHONES

Acos Mic 39-1. Crystal Stick Microphone for use as a hand, desk or floor stand unit for high quality recording, broadcasting and public address work. List price £5/5/-. OUR PRICE 39/6. With desk stand 47/6. With floor stand adapter 54/6. Postage 1/6.

Acos Mic Type 33-1. Crystal hand or table microphones. Flat response 30-7,000 c.p.s. Omnidirectional. Suitable for tape recording, etc. Dark brown plastic case. Brand new in maker's cartons. List 50/-. OUR PRICE 29/6. Postage 1/6.

Mic 40, as supplied with most modern tape recorders, listed at 35/-. OUR PRICE 25/-. With folding rest and 8ft. lead, 40/6,000 c.p.s.

ACOS PICK-UP ARM
 Type GP54/2, complete with turnover crystal cartridge and crystal styli HGP37/1 or HGP59/5C. 29/6 complete.
 Garrard Automatic Record Changer, 4 speeds, Type RC120/D Mark I. Price £8/17/6.

COSSOR PRINTED CIRCUIT KITS, Model 701K, VHF/FM, radio receiver kit, complete kit with instruction, listed £15/15/-. OUR PRICE £7/15/-. Post 3/6.

COSSOR PRINTED CIRCUITS KIT. 3 watt Audio amplifier model 562K, listed £9/15/-. OUR PRICE £5/10/-. Post 3/6.

COLLARO MARK IV TAPE TRANSCRIBTOR

Four heads, twin track operation, 2 motors, tape measuring and calibrating device, finished in cream polystyrene, cover plate with maroon controls, 3 speeds 3, 7 1/2 and 15 inches per second. Price £16/16/- plus 10/6 carriage and insurance.

EX-GOVERNMENT HEADPHONES ETC.

High Resistance Headphones type CHR. 13/6 pair, available either cream or black.

Low Resistance Headphones, impedance 120 ohms, type CLR, 7/6 pair.

American Throat Microphones, type T30, 3/- set.

LOUDSPEAKER UNITS

*All brand new. *Note Special Prices. *All Permanent Magnet 3 ohms impedance.

5in. Units by Plessey, Goodmans, Lectrona 17/6 each
 6 1/2in. Units by Plessey 18/6 each
 8in. Units by Goodmans 19/6 each
 10in. Units by Elac, Plessey 25/6 each

6in. x 4in. Units by Plessey 19/6 each
 7in. x 4in. Units by Goodmans 19/6 each
 7in. x 5in. Units by Goodmans 19/6 each
 8in. x 5in. Units by Goodmans 25/6 each
 10in. x 6in. Units by Plessey 25/6 each

8in. Loudspeaker Units 3 ohms impedance with a Matching Output Transformer suitable for 6V6. Brand new but soiled, offered at a Special Price of 11/6 each. Postage 2/-.

6 1/2in. Mains Energised Loudspeakers with Matching Output Transformer, Field Coil, 600 ohms. 17/6 each.
 8in. Mains Energised Loudspeakers with Matching Output Transformer, Field Coil, 600 ohms. 21/- each.

CATALOGUE
 Our 1960 catalogue is now available, please send 1/- in stamps for your copy. Trade Catalogues also available, please attach your Business Letter Heading.



103, LEEDS TERRACE, WINTOUN STREET, LEEDS, 7

TERMS: Cash with order or C.O.D. Postage and Packing charges extra, as follows: Orders value 10/- add 1/-; 20/- add 1/6; 40/- add 2/-; £5 add 3/- unless otherwise stated. Minimum C.O.D. fee and postage 3/-. For full terms of business see inside cover of our catalogue. Personal Shoppers 9 a.m. to 5 p.m. Mon. to Friday. Saturday 10 a.m. to 1 p.m.

CLYNE RADIO LTD.



OUR NEW SUPER TRANSISTOR/CRYSTAL RECEIVER

Employing special NEW SUPER SENSITIVE circuit and incorporating built-in Ferrite Aerial. For use with deaf-aid type earpiece. Housed in attractive ivory and black plastic case measuring only 4½ in. x 2½ in. x 1½ in. Very simple to construct. Most economical to run (Pen torch type battery lasts for months.) Completely safe. No external Aerial or Earth required. Excellent quality reception on Medium Waveband. Fully comprehensive, easy to follow, practical and theoretical construction provided. Special Price for all required components (inc. battery) only 27/6, plus 2/- P. & P. Deaf-aid type earpiece available separately complete with lead at 12/6. Full details and assembly instructions can be supplied separately if required at 1/- post free.



NEW LOOK ECONOMY FOUR



Our very popular three valve mains T.R.F. receiver is now available with a new De Luxe cabinet with polished Walnut finish and Cream trimming (as illustrated). Brief Spec.: Valve line-up 6K7, 6J7, 6V6, and contact cooled rectifier. Ready drilled chassis, good quality 5in. loudspeaker, Special Denco Coils. Covers Medium and Long Wavebands. Overall dimensions: 12in. x 6in. x 5in. high. A.C. 200/250 v. Simple construction with guaranteed results. Easy to follow practical and theoretical diagrams supplied. All necessary components, down to the last nut and bolt, are offered at a **SPECIAL INCLUSIVE PRICE OF £5/10/-**, plus 2/6 p. & p. Instruction book available separately 1/6, post free. Also available with plastic cabinet in IVORY or BROWN if preferred at **ONLY £5/5/-**, plus p. & p.

PRINTED CIRCUIT DE-LUXE SUPERHET

Housed in any of the above cabinets and employing the latest circuitry, assembly technique and miniature valves. Incorporates ferrite aerial and covers Medium and Long Wavebands. All required components at special inclusive price of **£7/19/6** (or 5/- extra for new style cabinet) plus 3/6 p. & p. Instruction book with full description, itemised price list etc., available separate at 1/6 post free.

THE NEW LOOK RAMBLER PORTABLE



This wonderful little Medium and Long wave battery superhet incorporates 1R5, 1T4, 1S5, 3V4 miniature valves, 5in speaker and frame aerial. Housed in smart two tone Red/Grey cabinet. All required components at only **£7/7/0** plus 2/6 p. & p. or with the latest low consumption "96 range" valves at **£7/15/6** plus p. & p. Uses all-dry batteries AD35 (1/6), B126 (9/-). Full descriptive instruction book with itemised price list, diagrams, etc., available separately at 1/6d. post free.

MAINS UNIT FOR RAMBLER PORTABLE. Fits into battery compartment. A.C. 200/250 v. All required components at **ONLY 47/6** plus 1/6 p. & p. or assembled and tested at **£3/5/-** plus p. & p. (Also suitable for many other portables.)

LEADING THE FIELD —

in equipment for

THE CONSTRUCTOR and HI-FI ENTHUSIAST


SEND STAMP FOR FULL LIST including F.M. Tuners, Receivers, Amplifiers, Stereo Amplifiers, Tape Pre-Amplifiers, Transistor Portables, Crystal Receivers, Battery Charger, Baby Alarm, etc., etc.

NOTE: ALL components supplied, including valves (even if surplus types) are guaranteed to be BRAND NEW !!!

8 STAR ALL PURPOSE TRANSISTOR PORTABLE "THE MAJOR—7"

The following eight outstanding features are available to the purchaser of this new, exciting receiver for home construction.

- ★ **APPEARANCE.** Second to none, being housed in a very special De-Luxe cabinet produced EXCLUSIVELY for us. Finished in the new unscratchable "Vynide" (available in either two tone Maroon/Grey or Black/White Polka Dot/Grey) with the speaker aperture completely covered, thereby blending with the clean lines of the cabinet. A very neat fold-away handle.
- ★ **SIZE (Overall).** ONLY 8½ in. x 6 in. x 4½ in.
- ★ **WEIGHT (including battery).** ONLY 4½ lbs.
- ★ **QUALITY.** Unequaled by any other portable of similar type. This applies both to output and components employed throughout. Push-pull output. 7in. x 4in. speaker.
- ★ **ECONOMY.** Powered by long life 7½ volt battery replaceable at only 2/- Vidor type L5048 or Ever Ready AD38.
- ★ **SENSITIVITY.** Excellent and equal to any commercially built receiver of similar type. Seven specially selected transistors are employed.
- ★ **EASE OF CONSTRUCTION.** Designed specially for the home constructor and supplied with most comprehensive assembly instructions (that are easy to follow).
- ★ **PRICE.** All necessary components available at a Special Inclusive Price of **ONLY £9.19.6** plus 3/6 p. & p., with MAZDA transistors (250 m.w. output). Instruction envelope and itemised price list 1/6d. post free if required separately.



A COMPACT TEST METER FOR HOME CONSTRUCTION.

This is a very sensitive multi-range test meter (500 micro-amp basic movement) covering the following ranges: A.C./D.C. voltage: 0-10 v., 0-50 v. and 0-500 v. Current: D.C. 0-10 ma., 0-50 ma. and 0-500 ma. Resistance (on internal battery) 2 K.ohm. to 100K.ohm. Housed in a smart grey stove enamelled case measuring 3½ in. x 7 in. x 1½ in. overall. Brand new best quality components and High Stability resistors are used throughout, resulting in a thoroughly reliable, accurate instrument. NOTE: Meter is supplied with calibrated scale fitted, and all components, including shunt, are prepared for immediate soldering into position. Comprehensive assembly instructions with practical and theoretical diagrams are supplied together with all necessary components at a **SPECIAL INCLUSIVE PRICE OF ONLY 59/6**, plus 1/6 p. & p. The instruction envelope is available separately if required at 1/6 post free.

THE NEW JASON FM TUNER

The latest addition to the impressive JASON range, and like all JASON equipment, can be depended upon for **QUALITY, RELIABILITY and PERFORMANCE.**



Incorporates the very latest features in design to ensure simplicity of operation and faultless performance. Housed in smart metal shelf mounting cabinet in pastel green with grey plastic dial. Built-in power supplies enable connection to any amplifier or radio fitted with Pick-up sockets, without complication. Two versions are available, i.e., Standard or Fringe Area. **ALL NECESSARY COMPONENTS SUPPLIED AT SPECIAL INCLUSIVE PRICE OF: STANDARD TUNER £8/19/6; FRINGE AREA TUNER £10/19/6**, both plus 3/6 p. & p. Comprehensive Assembly Instructions with full description and itemised price lists are available separately if required at 2/6 post free.

Full range of JASON equipment available ex-stock

PRINTED CIRCUIT CAR RADIO

(for Home Construction)

We are proud to be able to offer this New type Car Radio employing up to the minute circuitry, special 12 volt valves and transistorised output stage. The highest degree of sensitivity is assured by the incorporation of Permeability Tuning and a tuned R.F. Stage. Covers Medium and Long Wavebands. **NO VIBRATOR PACK IS REQUIRED.** This is a really compact receiver that will fit any car. Comprehensive assembly instructions are provided with all necessary components, including valves and transistor at a Special Inclusive Price of **Only £12/19/6** plus 3/6 p. & p. Instruction booklet with itemised price list, full description, dimensions, etc., available separately at 1/6 post free.

If not stated, please add postage on orders under £1. Cash with order or C.O.D. (charges extra).

CLYNE RADIO LTD.

Open: Tottenham Court Rd.: 9 a.m. to 6 p.m. Mon to Fri., Sat. 1 p.m. Holloway Road: 9 a.m. to 6 p.m. daily. Thurs. 1 p.m., Sat. 5.30 p.m.

Our advantageous H.P. and Credit Sale terms are available on any single item over £5. Your enquiries invited.

162, HOLLOWAY ROAD, LONDON, N.7. NORTH 6295/6/7.
18, TOTTENHAM COURT ROAD, W.1. MUSEUM 5929/0095.
(50 yards only from Tottenham Court Road Tube)

All post orders and correspondence to
162 HOLLOWAY ROAD, LONDON, N.7.

COSSOR KITS! A unique opportunity to obtain a first class amplifier and/or the latest type VHF/FM receiver at the most reasonable price ever.

COSSOR AUDIO AMPLIFIER KIT 562K. This excellent amplifier supplied in kit form in manufacturers' original presentation carton comprising: Pre-assembled printed-circuit board, valves: 6V4, 6BQ5, EF86 output transformer, two loud-speakers, 4in. circular and 10 x 6in. elliptical, wiring wire, nuts, bolts attractive escutcheon and control knobs, mounting brackets and fully illustrated assembly instructions. With negative feedback Incorporated, and the high performance loud-speakers provided, a really high quality output is assured. Suitable for use with radio tuners, microphone, or gramophone units. For A.C. 200/250v. operation.

BRAND NEW AND COMPLETE AT ONLY £5/19/6 plus 3/6 p. & p. (List price £9/15/-.)

COSSOR VHF/FM RECEIVER KIT 701K. A first-class receiver of the latest type for the reception of B.B.C. VHF/FM programmes, and suitable for use on AC or DC mains supply, supplied in kit form, in manufacturers original presentation carton, comprising: printed circuit (with all connections clearly marked), 6 valves: UCC85, UF89, UF89, UABC80, UL84, UY85. All necessary components including nuts, bolts, wiring wire, solder, etc., and an excellent quality Goodmans 10in. x 6in. elliptical loudspeaker. A fully illustrated step-by-step Instruction book is provided with the aid of which the receiver can be completed in approx. 9-10 hours.

BRAND NEW AND COMPLETE AT ONLY £8/19/6 plus 3/6 p. & p. (List price £15/15/-.)

EXTRA SPECIAL OFFER!!

A small three-valve **PORTABLE RECORD-PLAYER AMPLIFIER** mounted on baffle 12 x 7in. with High Flux 6½in. Loudspeaker, Valve line-up ECC83, EL84, EZ80. Incorporates separate bass and treble controls. Max. output 3 watts. Will match all types of high impedance pick-up. Ready to use, £5/12/6 plus 3/6 P. & P.

NEW STYLE CABINET finished in two-tone Leatherette. Will accommodate above Amplifier and Baffle without modification, also most types of Ancillary Equipment. Overall size 18 x 13½ x 8½in. Fitted with carrying handle, £3/9/6 plus 5/- P. & P. **NOTE.** If both items purchased together they will be supplied at a special inclusive price of £8/7/6 plus 6/6 P. & P.



ORDER NOW— LIMITED STOCKS

RECORD PLAYERS →

CABY UNIVERSAL TEST METERS

These pocket size multi-range test meters are of excellent quality and cover all the most useful ranges (A.C. Volts, D.C. Volts, resistance and current). Supplied complete with test probes, instruction book and batteries.

Model A.10 (2,000 ohms per volt) £4/17/6
Model B.20 (10,000 ohms per volt) £6/10/-

Plus P. & P. 3/6 on each. Fully detailed and illustrated leaflet available on request.

RECORDER AMPLIFIER

(Well known manufacturer's surplus.) This is a brand new amplifier designed for use with a famous wire recorder. A simple modification is all that is required to make this unit ideal for use with any Tape Deck. Specifications: Valve line-up 7C5, 2AU7, 6BR7, 6BR7, 6X4. Neon Record Level Indicator. Controls: Volume/Record Level. Tone Control, Record/Playback Switch. High and Low level inputs for Mike and Radio. External Speaker Socket. Built-in 5in. Loudspeaker with High Flux magnet: Separate Power Pack. Dimensions: Amplifier 5½in. H. x 11½in. W. x 2½in. D. Power Pack: 6½in. x 6in. x 5in. High (overall). Full modification details are supplied. Price £6/19/6. P. & P. 3/6.



A QUALITY RECORDER FOR 39 GNS.

Collaro Mark IV Tape Transcriber Deck..... £25 0
Special amplifier £14 14
8 x 6in. loudspeaker £1 10
De Luxe Cabinet with gilt fittings £4 10
Collaro Mike (or similar) £2 5
1,200ft. EMI tape..... £1 15

TOTAL £49 14

OUR SPECIAL INCLUSIVE PRICE ONLY

39 GNS. if all items purchased together. Terms: £4/19/- dep. and 12 monthly payments of £3/6/- C. & P.

15/- extra. Full assembly instructions provided. Note: We shall be pleased to wire the tape deck switches at extra charge of £1. Send stamp for further details.

LIMITED SUPPLIES OF THIS FINE AND POPULAR CABINET

Instantly recognised as being of leading High Quality manufacturers' stock, this trolley-type cabinet is finished in polished dark walnut. Can easily be adapted to accommodate tape recorder, amplifier, radiogram, etc., etc. External measurements: 24½in. x 16in. x 29in. The whole is mounted upon "easy run" castors. Subject to being unsold £5/19/6, plus 15/- C. & P.



THE LATEST COLLARO "CONQUEST" Stereo 4-speed auto-changer in cream with Stereo insert. Brand new, fully guaranteed. £8/19/6. P. & P. 3/6.

MONAURAL "CONQUEST" with Studio "O" insert, £7/19/6, plus P. & P. 3/6.

B.S.R. UA8 MONARCH. 4-speed Mixer Autochanger complete with turnover crystal insert and sapphire styli. Few only, now at £6/19/6 plus 3/6 P. & P. Brand new and fully guaranteed.

GARRARD RC.121D MK.II STEREO MONAURAL 4-SPEED AUTO-CHANGER. Complete with GC8 plug-in crystal head and sapphire styli for monaural records. Brand new fully guaranteed. Limited stocks. **ONLY £11/0/6, plus 5/- P. & P. NOTE:** Garrard L.P. Stereo plug-in head for above available as optional extra for £2/11/9 inc. P.T. Terms available.

GARRARD RC120/4H. 4-speed auto-changer with GC2 insert. Brand new fully guaranteed. £9/19/6. P. & P. 3/6

COLLARO JUNIOR. 4-speed turntable and pick-up complete with crystal cartridge and sapphire styli.



SPECIAL OFFER at only 75/- plus 2/6 P. & P. or **TURNTABLE and MOTOR** only at 52/6 plus 2/6 P. & P. **PICK-UP** only at 27/6 plus 1/6 P. & P.

B.S.R. TU9. 4-speed single-record unit with separate light weight pick-up fitted with T.C.8H. crystal insert and sapphire styli. An ideal unit for a small portable gramophone. Brand new and fully guaranteed. **SPECIAL PRICE:** 75/- plus 2/6 P. & P. or motor and turntable only at 52/6, plus 2/6 P. & P. or Pick-up only at 27/6, plus 1/6 P. & P. **E.M.I. 4-SPEED STEREO SINGLE RECORD UNIT.** Complete with Stereo Head and Sapphire Styli. Brand New and Fully Guaranteed. **ONLY £6/19/6 plus 3/6 P. & P.** whilst stocks last.

A SUPERB TABLEGRAM CABINET! (Limited stocks only.)

This beautiful cabinet, finished in highly polished dark walnut with gold piping, will accommodate any 4-speed single record unit, amplifier and 7in. x 4in. elliptical loud-speaker. (The motor-board is supplied cut for the Garrard 4SP player, but is easily modified for the Collaro Junior, B.S.R. TU9 etc.). Overall dimensions are: 15½in. wide x 13in. x 7½in. high. Clearance above motor-board (inc. lid) 3½in. Clearance below motor-board 3½in. This is a most attractive proposition for anyone who requires small but good quality equipment. Priced at **ONLY 59/6 plus 6/6.** (Do not miss this outstanding bargain!!!) Also available to accommodate auto-changer.



PORTABLE GRAM AMPLIFIERS

RC2A. Small PRINTED CIRCUIT single-valve high-gain amplifier for the smaller type of portable. Employs latest type ECL82 valve. Full details on request. Price 59/6 plus 2/- P. & P.
RC3A. A superior quality 3-valve amplifier employing EZ80, EL84 and ECC83. With separate bass and treble controls. Price £3/19/6 plus 2/6 P. & P. O.P. Transformer available at 4/6 extra.

CABINETS. We carry large stocks of cabinets to suit all types of equipment at prices ranging from 45/-. Suitable for housing all types of turntable, tape deck, amplifier etc. Terms available if required. Send stamp for illustrated leaflets of full range.

DECCA PORTABLE AMPLIFIER.

As supplied in famous DECCAMATIC III. Complete with small cream knobs. Full range tone and volume controls. Employs ECL82 valve. Size 3 x 3½ x 8½in. **Only 59/6 plus 2/6 P. & P.**

SPECIAL CELESTION 8 x 6in., elliptical high flux loud-speaker 30/- plus 1/- P. & P.

VERY ATTRACTIVE PORTABLE CABINET In Red and White polka dot for accommodating the above items and ancillary equipment, 75/-, plus 5/- P. & P.

NOTE. Supplied post free if all above items purchased together.

CLYNE RADIO LTD.



162 Holloway Road, London N.7 and 18 Tottenham Court Road, London W.1

SEE OVER FOR MORE BARGAINS →

CLYNE RADIO LTD.

THE COMPONENT SPECIALISTS

SEE ALSO PAGES 144, 145

JASON TEST EQUIPMENT

The following equipment of top quality is now available for home construction.
AUDIO GENERATOR AG10. Covers from 10 c/s. to 100 Kc/s. in four ranges. Max output 10 volts. Min. output 100 microvolts. Square wave output with excellent rise time makes this generator very useful for checking all Audio equipment. Housed in attractive metal shelf mounting case measuring 11 1/2 in. x 6 1/2 in. x 5 1/2 in. high. All necessary components available, including valves, at a Special Price of £14/5/-, plus 3/6 p. and p.

Fully descriptive booklet with comprehensive assembly instructions available at 2/- post free.

OSCILLOSCOPE OG10. This is a general purpose Oscilloscope based on a "Mullard" circuit employing a DG7-32 3in. cathode ray tube. A sensitivity of 100 microvolts per c.m. with a band width of 2 c/s. to 2.5 mc/s. makes this a useful unit for T.V. servicing as well as audio amplifier checking. Housed in smart metal case complete with carrying handle. All necessary components available, including valves, at a Special Price of £22/10/- plus 5/- p. and p. Fully descriptive booklet with comprehensive assembly instructions available separately at 3/6 post free.

JASON "EVEREST" TRANSISTOR PORTABLES. We are proud to be able to offer two new Jason all-transistor portable receivers designed to provide the highest possible standards of performance in their class. These are the "Everest-6" and "Everest-7" both covering Medium and Long wavebands, and incorporating ferrite rod aerial and special top grade loudspeaker. A printed circuit is employed and Mullard transistors are used throughout. An excellent quality output of 500 mw. is obtainable. Housed in a most attractive easily carried case with handle, finished in Blue/Grey "Vynaire" with Gold trimmings. The Everest-7 is exceptionally sensitive and well suited to car use, (aerial socket provided) and has improved AVC action due to the additional stage. All necessary components for building these wonderful receivers are offered at the following **SPECIAL INCLUSIVE PRICES**—EVEREST-6 (six transistor) £13/19/9, plus 3/6 p. and p. EVEREST-7 (seven transistor), £15/18/9, plus 3/6 p. and p. Fully descriptive booklet with comprehensive assembly instructions available separately if required at 3/6 post free.

AM/FM CHASSIS (By leading manufacturer).

SPECIAL OFFER! FEW ONLY! Top quality 6-valve chassis designed for first-rate reproduction of Radio and Records. Covers Long, Medium and F.M. Wavebands. Valve line-up: ECC85, ECH81, EF89, EABC80, EL84, EZ80. A ferrite rod aerial incorporated for A.M. bands. Size (overall) 12in. x 8 1/2 in. x 7 1/2 in. high. Dial size: 11 1/2 in. x 4 1/2 in. For 200/250 v. A.C. Leaflet available on request.

WHILST STOCKS LAST ONLY £16/19/6, plus 7/6 e. and p.

ADVANCE ANNOUNCEMENT
A HIGH QUALITY 4-WAVEBAND AM/FM CHASSIS
 (By famous manufacturer). BRAND NEW.

By the time this advertisement is released we expect to have received supplies of a really first-class AM/FM Chassis, which will undoubtedly be in great demand by the discerning enthusiast. Brief spec.: 8-valves, ECC85, ECH81, EF89, EABC80, 2/EL84, ECC83, EZ81. Covers Long, Medium, Short and FM Wavebands. Power pack and output stage (Push-Pull) mounted on separate chassis. Independent Bass and Treble Controls. Volume Control on flying lead. Available with Vertical or Horizontal dial. Flywheel tuning. Edge lit Facilities for quality tape recording or playback. Pick-up and extension speaker sockets provided. Further details on request. **PRICE WHILST STOCKS LAST ONLY £17/19/6, plus 5/- p. and p.** Terms: Deposit 39/6 and 12 monthly payments of 29/4.

TAPE RECORDER SPECIAL! We have a few only of the famous Gelsco Miniature Tape Recorder Model TR.175 to offer at a greatly reduced price. This wonderful little recorder has push-button controls, magic eye level indicator and a really high quality reproduction, which is quite remarkable for a recorder of such small size (10in. x 5 1/2 in. x 6 in.). Brief spec.: Valve line-up—ECC83, 35D5, DM70. Output 2 watts. Frequency response 80-6000 c/s. at 3 1/2 in. per sec. For use on A.C. 110-250 v. mains. Weight 7 1/2 lbs. Supplied complete with special leatherette carrying case, spool of tape and microphone AT ONLY 29 gns. Brand new. Plus 5/- p. and p. Illustrated leaflet available on request.

Terms: Deposit £3/9/- and 12 monthly payments of 49/6.

VISIT OUR FULLY EQUIPPED HI-FI SHOWROOM AT TOTTENHAM COURT ROAD FOR DEMONSTRATION OF THE LATEST HI-FIDELITY EQUIPMENT BY ALL LEADING MANUFACTURERS. I.e. Leak, Quad, Armstrongs, Dulci, Ferrograph, Vortextion, Linear, Wharfed Grundig, Rogers, etc., etc. A full range of high quality cabinets to suit all purposes are on show, i.e., "RECORD HOUSING". "W.B." etc. Enquire about our interesting part-exchange scheme for personal callers.

VALVES. We have perhaps the most up-to-date valve stocks in the trade. New Imported valve types fully guaranteed and P.T. paid and all the usual surplus types at special prices. We also carry a comprehensive stock of all B.V.A. types at current list prices. Send stamp for NEW list now available. Note: Certain other American special purpose types can be supplied. Enquiries invited.

RE-GUNNED CATHODE RAY TUBES. (As new). Guaranteed 12 months. 12in. and 14in. £6/10/-; 15in. and 17in. £6/19/6; 21in. £7/19/6, plus 10/- c. and p.

- TRANSISTORS!!!—**
SURPLUS—P.N.P.
RED SPOT (Audio/Experimental Application) 5/- ea.
WHITE SPOT, R.F. up to 2.5 Mc/s. 7/6 ea.
STANDARD—BRIMAR
 TS8 18/6 ea.
MULLARD
 OC16 Power 3 watt 54/- ea.
 OC44 18/6 ea.
 OC45 R.F. up to 6 Mc/s. 18/6 ea.
 OC70 10/- ea.
 OC71 10/- ea.
 OC72 14/6 ea.
 OC72 matched pair 27/- pr.
 V15/10P 15/- ea.

- NEWMARKET**
 V6/R2 R.F. up to 4 Mc/s. 18/- ea.
 V6/R4 R.F. 4-8 Mc/s. 33/- ea.
 V6/R8 R.F. up to 8 Mc/s. 42/- ea.
 OC73 12/6 ea.
 OC77 18/6 ea.

- AUDIO**
 V10/15A 15/- ea.
 V15/10P (Power) 20/- ea.

- MAZDA**
 XA104 R.F. up to 6 Mc/s. 18/- ea.
 XA103 R.F. up to 4 Mc/s. 15/- ea.
 XB104 Audio up to 1 Mc/s. 10/- ea.
 (Data sheets available)
 (ALL POST FREE)

METERS. We carry large stocks of Meters from 25 microamps to 1,500 v. A few of the most popular types are:— 25 microamps 2 1/2 in. Flush Round, 65/-; 100 microamps 2 1/2 in. Flush Round Moving Coil @ 45/-; 500 microamps 2 in. Flush Round Moving Coil @ 18/6; 1 mA. 2 in. Flush Square Moving Coil "Elliott" 1954 man., 25/-; 50 mA. 2 in. Flush Square Moving Coil 8/6; 1 mA. 2 1/2 in. Flush Round 35/-. Send stamp for complete list. We shall be pleased to quote for special meters to your own specification.

PRECISION TEST METER
 (To build yourself)
 Nineteen ranges, D.C./A.C. Current and resistance. Designed and produced for us by the famous Pullin Company. All necessary components at Special Inclusive Price of only £5/19/6 plus 2/6 P. & P. Illustrated leaflet with full description available on request.

12in. BAKERS SELHURST LOUSPEAKERS 15 ohms, 15 watt; 30-14,000 cps. Brand new, £4/10/-, P. & P. 3/6.

AMPLIVOX HEADSET SPECIAL (not surplus). As used in up-to-date ships, aircraft, etc. Excellent quality super lightweight low impedance magnetic headphones complete with button microphone attached and plastic ear moulds. Absolutely brand new, 45/- pair. Plus 1/6 P. & P.

EVERSHED AND VIGNOLES BRIDGE MEGGERS. Series 2. 250 v. Perfect and complete with leather carrying case. **FEW ONLY** at £19/19/-, plus 7/6 P. & P.
TRANSFORMER SPECIAL. Superior quality half-shrouded drop thro' type. Ex-equip. but guaranteed O.K. Input 200/250 v. Output 350-0-350 v. @ 80 ma. 6.3 v. @ 3 amps. 5 v. @ 2 amps. **ONLY 9/6, plus 2/6 P. & P.**

MINIATURE 3-WAVEBAND COIL PACK. Manufacturers surplus. Brand new and complete with circuit. Suit 465-470 Kcs. I.F. Dust cored coils. Covers Long, Medium and S.W. Size only 2 1/2 in. x 2 1/2 in. A SNIP at only 27/6, plus 1/6 P. & P.

HEAVY DUTY POWER PACK. By leading Manufacturer. Input 200/250 v. Output 350-0-350 v. @ 280 ma. 6.3 v. and 8 amps. 6.3 v. @ 2 amps. 4 v. @ 7amps. 5 v. @ 2 amps. Fully smoothed. Incorporates GZ32 rectifier. Chassis size: 13in. x 7in. x 5 1/2 in. Wt. 22lbs. £4/19/6, plus 5/- P. & P.

3-SECTION WHIP AERIALS. Ideal for fishing rods etc. Each section 4ft. **ONLY 7/6, plus 2/6 P. & P.**

DECCA LIGHTWEIGHT PICK-UP. Complete with Studio "O" turnover crystal insert and sapphire styli for L.P. and 78. Brand new at **ONLY 47/6, plus 1/6 P. & P.**

DEAF AID TYPE EARPIECES. Standard magnetic type complete with lead and plug. As new. **ONLY 12/6, plus 1/- P. & P.**

CLR LOW IMPEDANCE HEADPHONES. Complete with headband and leads 5/6 pr., plus 1/6 P. & P.

DLR5 BALANCED ARMATURE HEADPHONES. Complete with headband and leads, 7/6 pr., plus 1/6 P. & P.

HIGH IMPEDANCE LIGHTWEIGHT HEADPHONES. Brand new imported type finished in cream. Complete with leads, 15/- pr., plus 1/6 P. & P.

"INTERNATIONAL RADIO TUBE ENCYCLOPAEDIA" World Wide valve data in 14 languages, plus English, 63/-, plus 3/6 P. & P.

6 VOLT VIBRATOR PACK. Ex-W.D. Output 140 v. @ 30 ma. Fully smoothed. Size: 6 1/2 in. x 5 in. x 2 1/2 in. As new, **ONLY 12/6, plus 2/- P. & P.**

12 VOLT VIBRATOR PACK. (Mallory). Output 150 v. @ 40 ma. Complete with synchronous vibrator. Brand new. **ONLY 12/6, plus 2/- P. & P.**

WIRING WIRE. 5 coils 10 yds. each coil, in different colours, contained in cellophane bag, 5/- bag, plus 9d. postage.

S.T.2 PRINTED CIRCUIT STEREO AMPLIFIER. A beautifully made amplifier, ideal for portable equipment of superior quality. Valve line-up: 2-6AQ5, 2-12AX7, EZ81. Ganged Volume, Bass and Treble controls. **SUPPLIED COMPLETE WITH TWO GOOD QUALITY 8in. LOUSPEAKER UNITS.** All connections clearly marked. Overall dimensions: 4 1/2 in. x 10 1/2 in. x 3 1/2 in. high. **ONLY 11 gns., plus 3/- P. & P.** or, less loudspeakers **ONLY 9 gns.**

G.C.2. CRYSTAL INSERT with L.P. and 78, Sapphire Styli. BRAND NEW, 16/6. Plus 9e. P. & P.

ALLAN DOUGLAS ELECTRONIC ORGAN
 Readers will no doubt be pleased to know that our working model of this amazing organ for home construction, may now be heard and seen, at our Hi-Fi Showroom in Tottenham Court Road, W.1. For the benefit of constructors all components, keyboards, chokes, etc. are available ready made. Full constructional details are available in book form at 15/- plus 1/6 p. and p. We shall be happy to forward a complete price list on receipt of a stamp. Please address all organ enquiries for the attention of Mr. L. Roche.

CLYNE RADIO LTD.

 162 Holloway Road, London, N.7.
 and
 18 Tottenham Court Road, London, W.1.

Visit the City's popular acoustically designed

HI-FI Centre

COME AND HEAR THE LEADING MAKES IN AMPLIFIERS, TUNERS AND SPEAKER SYSTEMS

AMPLIFIERS, STEREO AND MONAURAL, BY:

VERDIK
ARMSTRONG
ROGERS
DULCI

QUAD
LEAK
W.B.
etc.

V.H.F. TUNERS BY:

ARMSTRONG
LEAK
QUAD

T.S.L.
DULCI
ROGERS, etc.

HI-FI SPEAKERS BY:

GOODMAN
PLESSEY
WHARFEDALE
LORENZ

W.B.
T.S.L.
G.E.C.
etc.

LOOK AT THIS AMAZING OFFER

6 Transistor Plus Diode Pocket Superhet Radio

Easy to build using 6 Mullard transistors; OC44, OC45(2), OC71, matched pair OC72, OA70 Medium and long wave bands. Printed circuit. Built-in HIQ Ferrite Aerial. Push-pull

output. 150 ohms 3in. loudspeaker. Circuit and layout diagram. Low consumption. Power Output 150 M.W. Sensitivity—1MV for 50 M.W. output. Circuit line up; mixer stage, 2 I.F. stages, Germanium detector, AF driver stage and push-pull output.

ALL COMPONENTS COMPLETE LESS CABINET AND BATTERIES AT THE SPECIAL PRICE OF

£7-19-6

Post and packing 2/6. All parts available separately. Cabinet available in parts to be assembled. With tuning knob and scale. 18/6 plus 1/6 post and packing.

2 BARGAINS FOR CONSTRUCTORS

The new Cossor 6 valve FM receiver kit comprising all components including 6 valves, Goodman's 10 x 6 speaker, printed circuit chassis, easy to follow instructions. Even to nuts and bolts. Manufacturers price 15 gns. Our price £8/19/6 complete. P. & P. 2/6. Cossor 3-watt printed circuit audio amplifier. All components mounted on printed circuit chassis, 3 Cossor valves, 10 x 6 speaker, 4in. tweeter, and all components including easy to follow instructions. Cossor's price £9/15/0. Our price complete £5/19/6. P. & P. 3/6.

SPECIAL OFFER IN TRANSISTORS

Audio PNP transistors type T51..... 5/- each
Sensitive diodes type GD3 2/6 each
Ediswan X B104 9/6
" X B103 12/6
" X A104 17/6
General Purpose diodes 10d. ea.
Single ear phones 4/6 ea. 1/- p. & p.
Crystal Ear pieces with lead and ear plugs.
Low impedance.
Our price 12/6. 1/- p. & p.
Transistor Condensers. Miniature Electrolytic Capacitors. 32 mfd. 3v., 25 mfd. 25 v., 25 v., 25 mfd. 6 v., 16 mfd. 12 v., 8 mfd. 6 v., 5 mfd. 12 v., 2.5 mfd. 25 v., 1.6 mfd. 6 v., 1 mfd. 12 v. All these types of condensers are 2/6 each.

STOP PRESS

Amazing Bargain

By famous mfr. 10 x 8 elliptical speaker, heavy magnet 3 ohm. imp. Our price 17/6. 1/6 P. & P.

FOUR ASTOUNDING TV TUBE OFFERS

All brand new in famous maker's cartons.

- (1) 17in. rectangular aluminized 6.3 HRTS. .3A current; max. anode voltage 16 kV. Usual price £17/5/- OUR PRICE £9/19/6. Crating and carr. 15/-.
- (2) 14in. rectangular Tube, 6.3 heaters; .3 amp current; max. anode 14KV; ion trap; external conducting coating; B12A base. £8/17/6. Crating and carriage 12/6.
- (3) Ferranti T12/44 and T12/549 12in. magnetic white fluorescence; 4 v. heater; max. anode 10 kV. As used in many TV receivers. Original price £17/15/- OUR PRICE £4/4/- Crating and carr. 12/6.
- (4) Ferranti 9in. Tube round white fluorescence, 4 v. heater, max. anode voltage 7 kV. OUR PRICE £2/10/- Crating and carr. 11/6.

LIMITED NUMBER AVAILABLE BRAND NEW AND GUARANTEED

The famous COLLARO Mk. 4 Transcriber Tape Deck. Twin track, 2 record/playback, 2 erase heads on 2 levels, pause control, digital counter, 3 speeds, 2 balanced motors of low wattage input. £17/10/-. **WHILE STOCKS LAST.** Crating and carr. 17/6.

Build yourself a HI-FI TAPE RECORDER

The Collaro pre-amp and bias oscillator complete with power pack for the above deck, with instructions. Price £12/19/6. Post and pkg. 7/6.

The above two items at a special price of £30. Carr. and pkg. 22/6 the two units.

The Linear Tape Deck Amplifier with power pack and oscillator incorporated. Switched for 3½, 7½ and 15in. per sec. Suitable for the Mk. 4 Deck. 12 gns. only. Post and pkg. 3/6.

LIMITED NUMBER

For the Hi-Fi enthusiast—Collaro 4-speed transcription motor and p/up using the new TX88 Studio cartridge. Brand new. List price £19/10/- OUR PRICE £15/19/6. Crating and carr. 12/6. Easily wired for stereo to use Ronette stereo t/o cartridge.

SPECIAL OFFER

Few only Collaro Jnr. 4-speed motor and t/table 50/- P. & P. 2/6. Suitable lightweight Acos Hi-G turnover pickup 26/6. P. & P. 1/- THE 2 ITEMS TOGETHER 70/- P/P 3/-.

MAKE YOUR OWN PRINTED CIRCUITS

Printed circuits made to any wiring diagram. This kit contains all instructions, laminated board and the necessary chemicals for making numerous printed circuits. Additional laminated boards available. All materials of high quality, safe and easy to handle. Complete in perspex case. Our price 19/6. P/pkg. 1/6.

A REPEAT OFFER! ASTOUNDING VALUE

The VERDIK QUALITY TUNER

10 WATT PUSH PULL ULTRA LINEAR FEEDBACK

Reduced from makers price of 20 gns. Now only

£14.19.6

complete. Fully guaranteed for valves and service. Post & Pkg. 7/6. Fully guaranteed

AMPLIFIER AND PRE-AMPLIFIER

Beautifully finished in Grey-Green Stove Enamel. Provision for tuner, bass and treble, 5-position selector for radio, mic., tape, LP and std. records.

HI-FIDELITY TAPE HEADS

Made by famous manufacturer. Brand new. Upper or lower track, record/play-back, high impedance giving up to 12,000 c.p.s. at 7½ I.P.S. output 5 m/volts at 1 KC at 7½ I.P.S. Erase heads low impedance. Only 39/6 per pair. Post 1/-. State upper or lower track.

ANOTHER SNIP OFFER

Acos 39/1 Crystal Pencil Mic. List price 5 gns. —our price 39/6. Post and packing 1/6.

BUILD THIS YOURSELF

The Transette Medium Wave, 2 transistor, pocket portable. Neatly designed, using 2 transistors and diode. Simple to assemble. Enlarged working diagram. All components colour coded. Ferrite wound aerial. Will play indoors and outside with self contained aerial. All components and diagram complete 62/6. Post & Pkg. 1/6.

- Plug in ear piece 12/6
- Single phone 4/6
- Battery 2/-

All components available separately Stamped addressed envelope for details

Electronics Ltd

(FLEET ST.)

DEPT. B
152/3 FLEET ST., LONDON, E.C.4
Telephone: FLE 2833
Business hours: weekdays 9-6. Saturdays 9-1.

G.W. SMITH & CO

(RADIO) LIMITED

Phone: GERRARD 8204/9155

Cables: SMITHEX LESQUARE

334 LISLE STREET, LONDON, W.C.2



PARMEKO TABLE TOP TRANSFORMERS
 Input 230 v. 50 c/s.
 Output 620/550/375/
 0/375/550/620 volts
 250 mA. Also 2.5 v.
 3 amp. windings
 Size 6½ x 6½ x 5½ in.
 Brand new only,
 45/- each. P/P 5/-.



BENDIX BC-453 COMMAND RECEIVERS 'Q' FIVER
 Coverage 190 to 550 kc/s.
 Complete with 6 valves, 3-12SK7, 12K8, 12SR7, 12A6.
 85 kc/s I.F.T.
 Supplied brand new and boxed, 89/6 each. P/P 3/6.

CRYSTAL CALIBRATORS No. 10

An extremely useful instrument providing the following facilities: 1, Xtal controlled osc. giving fixed frequency signals of 500 kc/s and harmonics to 30 Mc/s; 2, An additional switched oscillator (250-500 kc/s) enabling all Intermediate frequencies from 500 kc/s to 10 Mc/s to be produced. Compact size, 7 x 7½ x 4 in. Utilises 2-1T4, 1R5 and CV286 valves and 500 kc/s Xtal. Supplied with instructional hand book. 59/6 each. P/P 3/6.

PORTABLE PRECISION VOLTMETERS

Brand new instruments by famous manufacturer. In polished teak case. Moving iron instrument reading A.C. or D.C. volts on 2 ranges 0-160 v. or 0-320 v., Bin. mirror scale. Accuracy within 2%. £5/19/6 ea. P/P 3/6.

BRAND NEW RCA EXTENSION LOUDSPEAKERS

Bin., 3 ohm Quality Speaker mounted in attractive black crackle case to match AR88 Receivers, etc.
 45/- each. P/P 3/6.

AMERICAN 1,000 O.P.V. MULTI-RANGE TESTMETERS

400 microamp basic mov. Seven A.C./D.C. volt ranges 0 to 5,000v. D.C. current 1 mA, 10 mA, 100 mA, 1 amp. Res. 160 ohms, 100 K ohms and 1 meg. Decibels. Supplied brand new with test prods, batteries and instructions. £3/19/6 each. P/P 2/6.

MINE DETECTORS No. 4A

Complete equipment comprises search head, amplifier, headset, control box, telescopic rods for search head, test unit, test measure and haversack. Operation from Std. 67½/1.5 v. battery. Will detect ferrous or non-ferrous metals. Very portable and sensitive. Supplied brand new in original transit cases with circuit and instructions. 99/6 each. Carr. 10/6.

OSCILLOSCOPES TYPE II. Compact little 'Scopes with all standard controls, switched time base, etc. 200/250 volts A.C. operation. Not brand new, but in good condition, fully checked. £9/19/6 each. P/P 7/6.

DON Mk. 5 FIELD TELEPHONES

Ideal for all inter-communication. Buzzer calling. Supplied fully tested, complete with batteries and instructions. 39/6 each. P/P 3/6 ea., 5/- pr.

MAINS ISOLATION TRANSFORMERS. 230 v. input, 230 v. output, 5 amp capacity. Housed in ventilated metal case, £5 each P/P 10/-

750 watt AUTO TRANSFORMERS. Tapped from 110 to 230 v. Fine heavy duty type, 69/6 ea. P/P 5/-.

A.C. MAINS VOLTAGE REGULATOR TRANSFORMERS. Input 230 v. Output var. 185 to 250 v. 24 amps or 185 to 250 v. input. 230 v. output 24 amps, £12/10/- P/P 10/-.

WESTON 772 TESTMETERS. Supplied in perfect working order, with leads and batteries, £7/10/- each. P/P 4/6.

A.C. volts: 2.5 v., 10 v., 50 v., 250 v., 1,000 v. D.C. volts: 2.5 v., 10 v., 50 v., 250 v., 1,000 v. D.C. current: 100 micro/A, 1 mA, 10 mA, 50 mA, 100 mA, 500 mA. Output Meter A.C. Current: 500 mA, 1 amp, 5 amp. Resistance: 100 ohms, 1,000 ohms, 100 k. ohms, 10 megohm.

COSSOR DOUBLE BEAM OSCILLOSCOPES

Type 339. 10-position time base, 6 cps. to 250,000 cps. Amplifier 10 cps. to 2 mill. cps. Reconditioned, perfect working order. Complete with handbook. £27/10/- each. Carriage £1

ROTARY CONVERTERS

12 v. D.C. input. 230 volt A.C. 150 watts 50 cycles output. Housed in wooden case and fitted with voltage control slider resistance, switch, plugs and A.C. mains voltage output check meter. Supplied in perfect condition, individually tested 59/19/6 each. P/P 10/-.

VORTEXION PORTABLE AMPLIFIERS

Operation from 200/250 volts A.C. or 12 volts D.C. Separate inputs for microphone or gram. Output matched to 7.5, 15, 250 or 500 ohms. incorporates volume control and full switched tone control. Valve line-up: 6Q7, 6J5, 6V6, 6V6, 5Z4. Size 8½ x 6½ x 17½ in., not brand new but supplied in perfect working order, fully tested. £10/10/- each. P/P 6/-.

UNIVERSAL AVOMINOR TESTMETER

A.C./D.C. volt ranges to 500 v. Current 0 to 500 mA. Resistance 0 to 20K ohms. Supplied in perfect working order complete with batteries, leads and leather carrying case. £3/19/6 each. P/P 2/6.

8-RANGE SUB-STANDARD D.C. AMMETERS

Ranges 1.5, 3, 7, 15, 30, 60, 300 and 450 amps. 8 in. mirror scale. Meter housed in polished teak case. Supplied complete with all shunts and leather carrying case. £15 each. P/P 7/6.

**RCA PADDED MOVING COIL HEAD-
PHONES.**

Brand new boxed. Finest tonal quality, low impedance. Fitted with std. jack plug. 19/6 per pr. P/P 1/6.



ADMIRALTY POWER UNITS 234A. 200/250 volt A.C. Input. Output 250 volts 150 mA. and 6.3 volts 6 amps. Fully smoothed double choke and paper condensers, fused and fitted with input and output plugs. Sockets are provided on the front panel for meter check. Housed in grey metal case for standard 19in. rack mounting. Supplied brand new. 59/6 each. P/P 7/6.

R.1155 COMMUNICATIONS RECEIVERS.

MODELS L & N. Both models incorporating the trawler and top band. Supplied in perfect condition, realigned, fully tested. £12/19/6 each. **STANDARD MODEL B.** Fitted with improved N type drive, perfect order realigned, etc., £7/19/6 each. Carriage 7/6 both types. **COMBINED POWER PACK AND OUTPUT STAGE,** to suit either models, 85/- extra. Illustrated instruction book with all receivers.



RCA PLATE TRANSFORMERS.

Input 200/250 volts. Output 2,000/0/2,000 volts 500 mA. tapped 1,500/0/1,500 volts. Supplied brand new boxed, £6/10/- each. carriage 10/-.



GR.100 SPARES KITS. 15 valves, resistors, pots, o/p trans. condensers, all new boxed, 59/6 per set. P/P 3/6.

ADVANCE CONSTANT VOLTAGE TRANSFORMERS. 190 to 260 volt input. Constant 230 volts output. 150 watts. Brand new, £8/10/- each. P/P 5/-.

UNIVERSAL AVOMETERS. Reconditioned, perfect order. Model Z £8/10/-, Model 40 £10/10/-, Model 7 £12/19/6.

EDDYSTONE MAINS POWER PACKS

200/250 volts input. Output 175 volts 60 mA. and 12 volts 2.5 amps. Double choke and condenser smoothed. 5Z4 rectifier. Supplied as new and unused, 32/6 each. P/P 3/6.



24 VOLT ROTARY CONVERTORS.

Input 24 volts D.C. Output 230 volts A.C. 50 cycles, 100 watts. Housed in metal carrying case with inlet/outlet plugs. Brand new, 92/6 each. P/P 7/6.



FIELD TELEPHONES TYPE L.

Generator bell ringing. Light and very portable. Ideal for all installations. Supplied complete with batteries, fully tested. As new, 59/6 each. P/P 3/- 5/- pr.



FURZEHILL BEAT FREQUENCY AUDIO OSCILLATORS. Frequency range 0 to 10,000 cycles. Output 10 or 600 ohms. Separate 50 cycles check. Set zero control. 200/250 volt A.C. operation. Supplied in perfect working order, fully tested, £9/19/6 each. P/P 10/-.

NIFE ALKALINE ACCUMULATORS. 12 volt 45 ampere. £4/19/6 each. P/P 7/6.

MARCONI SIGNAL GENERATORS TF-517. 10-18 mc/s. 33-58 mc/s. 150-300 mc/s. Operation 200/250 volts A.C. Supplied in good working order, £12/10/- each. P/P 10/-.

MUIRHEADPRECISIONSTUDSWITCHES. 2 pole, 2 bank, 24 position, 10/6 each. P/P 1/- 4 pole, 4 bank, 24 position, 17/6 each. P/P 1/3.



**MARCONI TF-428 B/I VALVE VOLT-
METERS.** 5 ranges A.C. and D.C. 1.5, 5, 15, 50 and 150 volts. Operation 200/250 volts A.C. Supplied in perfect working order complete with internal H.F. probe. Brand new with Handbook. £17/10/- each. P/P 10/-.



**HALLICRAFTER S.27 U.H.F. COM-
MUNICATION RECEIVERS.** F.M. or A.M. coverage 27 to 143 mc/s. on 3 bands. Incorporates S meter, variable sel. b.f.o. a.n.l. etc. Output for phone or speaker. Operation 110 or 230 volts A.C. Supplied in good working order, £27/10/- each. P/P 10/-.

FIELD TELEPHONES TYPE F.

Generator bell ringing. Supplied complete with batteries fully tested and complete with wooden carrying case 57/6 each. P/P 3/6. 5/- pr.



AMERICAN GEARED MOTORS

24 volt D.C. motor fitted with precision gearbox giving twin outputs of 20 and 6 r.p.m. Also operates on 12 volts. 1/2 in. shafts. Brand new. 19/6 each. P/P 1/6.



FERRANTI TESTMETERS TYPE Q

D.C. A.C. D.C. Ohms. VOLTS VOLTS Current
3 v. 15 v. 7.5 ma. 25,000
30 v. 30 v. 30 ma.
150 v. 150 v. 150 ma.
600 v. 060 v. 750 ma.
500 ohms per volt on all ranges B.S.S. first-grade accuracy on all self contained ranges. Supplied in perfect working order complete with leads, battery, instructions and rexine covered carrying case. Price 52/6 each. P/P 2/6.



HOURS OF BUSINESS: 9 A.M. TO 6 P.M. THURSDAY 1 P.M. OPEN ALL DAY SATURDAY SEND S.A.E. FOR LISTS.

G.W. SMITH & CO (RADIO) LIMITED
 Phone: GERRARD 8204/9155.
 Cables: SMITHEX LESQUARE
 3-34 LISLE STREET, LONDON, W.C.2

LASKY'S RADIO

7-VALVE AM/FM RADIOGRAM CHASSIS

Famous make, for 200-250 v. A.C. Output 4 watts matched to 3 ohms speaker, 7 valves: 6X05, 6CH8, 6F8, 6AB8, 6L6, 6Z6, 6X81, Magic eye tuning indicator. Covers medium, long and FM bands. Length 12in., height 7in., front to back 8in. Limited number only.

LISTED AT 22 GNS.

LASKY'S PRICE **£16.19.6**

Carr. and Insur. 12/6.

Available on H.P. terms.

Brochure on request.

COMBINED AM/FM TUNER, CONTROL UNIT AND PRE-AMPLIFIER

(Self Powered)

Mdl. H11 Famous make. Note these star features:

- ★ FM plus Long, Medium and Short
- ★ High Fidelity Pre-Amplifier
- ★ Independent Bass and Treble Controls
- ★ Pick-up Matching Device and Switch positions for LP and 78
- ★ Tape Record and Replay facilities
- ★ For use with any HI-FI Amplifier
- ★ Magic Eye Tuning Indicator

For A.C. 200-250 v. 7 B.V.A. glass miniature valves, 6C05, 6CH8, 6F8, 6AB8, two 6F8, 6X81, 6Z61, and two matched Diodes. Glass dial, 11in. x 6in., fine readings and 'LOG' scale. Length 12in., depth 9in. from dial front (10in. including knobs and spindles), height 7in.

LISTED AT £29/3/10

LASKY'S PRICE **20 GNS.**

Carr. and Insur. 12/6.

Available on H.P. terms.

ALL TYPES OF CHASSIS

ARMSTRONG, DULCI, EMPRESS, etc.

A.M. (L.M.S.) from 7 Gns.
A.M./F.M. from 14 Gns.
A.M./F.M. STEREO from 22 Gns.

TRANSCRIPTION TURNTABLES

COLLARO 4-rpd., type 4T300/EX with Studio transcription P.U.

LIST £19/10/-

LASKY'S PRICE **£16.19.6** carr. paid.

In Carrying Case, 25/- extra.

All other makes in stock.

PLASTIC TAPE SPOOLS

3in. 4in. 5in. 5½in. 7in. 8½in.
2/8 2/8 3/8 4/3 4/- 5/8
7in. Metal Spools, 1/8 each
Post extra

SEND FOR OUR NEW COMPONENTS CATALOGUE

OVER 100 PAGES, SIZE 8½in. x 5½in. WITH HUNDREDS OF UP-TO-DATE ILLUSTRATIONS.

Price 2/- Post 6d.

THE LARGEST AND MOST COMPREHENSIVE STOCKS FOR ALL CONSTRUCTORS AND HIGH FIDELITY ENTHUSIASTS

LASKY'S DO IT AGAIN!

TV CHASSIS SCOOP!

BRAND NEW, BY WELL-KNOWN MAKERS

90° deflection, 12 channel turret tuning covering all BBC and ITV channels. Complete with brand new Mullard valves and tube. Strictly limited number only, factory sealed. Full details and circuit diagram supplied.

LASKY'S PRICE

21in. 17in.

39 GNS. 29 GNS.



MICROPHONE BARGAINS



ACOS 39-1 CRYSTAL STICK MIKE for high quality recording, broadcasting and public address work.

LIST 5 Gns. LASKY'S PRICE **39/6**
Post free. Desk Stand available, 2/6.

ACOS 39/1 CRYSTAL HAND OR TABLE MIKE with specially designed acoustic filter. Flat response 30-7,000 c.p.s. Omni-directional. Dark brown plastic. LIST 50/-

LASKY'S PRICE **29/6** Post free

HIGH FIDELITY TAPE RECORDER HEADS

Leading make, new and unused. Upper or lower track. RECORD/PLAYBACK, high impedance. Double wound and will reproduce up to 12,000 c.p.s. at 7½ i.p.s. Azimuth adjustments. Output 5 millivolts at 1 Kc. at 7½ i.p.s. ERASE, low impedance. LIST 44 PAIR

LASKY'S PRICE, per pair **39/6**

Post free

Please specify upper or lower track.

PICK-UP CARTRIDGES

B.S.R. "ful-fi" TCS, turnover crystal cartridge with L.P. and standard stylus. LIST 39/7 each.

LASKY'S PRICE **18/-**
Post free.

BARGAINS IN 4-SPEED MIXER AUTO-CHANGERS

New in maker's cartons



B.S.R. Type UAS, complete with B.S.R. "ful-fi" pick-ups. **£6.19.6** Post 6/-
Ditto, wired for STEREO, £7/19/6.

B.S.R. Latest type UA12, wired for STEREO, complete with stereo cartridge. LASKY'S PRICE £8/19/6. Post 6/-
Ditto Monaural, £7/19/6.

COLLARO RC457. Manual and auto. control, complete with Studio crystal P.U. and sapphire stylus. LIST £12/17/-
LASKY'S PRICE £7/19.6. Post 3/6.

SINGLE PLAYERS



COLLARO "Junior" 4-spd. motor and separate pick-up with cartridge and stylus.

MOTOR only 55/-
PICK-UP 27/6

SPECIAL OFFER. MOTOR AND P.U. if ordered together, 75/- post free.

COLLARO 4/584 or GARRARD '48P, 4-speed, auto stop, i.e. crystal pick-up £8.9.6. Post 6/-.

STEREO SINGLE PLAYER

E.M.I. 4-speed, wired for stereo and fitted with Acos stereo i.e. cartridge. LASKY'S PRICE £8/19/6. Post 6/-.

TAPE DECK OFFERS

Latest B.S.R. "MONODECK". Single speed, 2½ i.p.s. Takes 5½in. spools. Simple controls. £9/19/6. Carr. and Insur. 12/6.

Latest COLLARO Studio Tape Transcriber. 3 motors, 3-spd., 1½, 3½, 7½ i.p.s. Takes 7in. spools. Push button controls. £15/19/6. Carr. and Insur. 12/6.

COLLARO TAPE TRANSCRIBER Mk. IV, fitted digital counter. Few only. LIST £25.

LASKY'S PRICE **£17.19.6**

Carr. and Insur. 21/-.

TAPE RECORDER AMPLIFIER for use with Collaro Tape Deck. Maker's surplus, complete with 4 valves and power supplies. **£7.19.6** Post 3/6.

RECORDING TAPE SPECIAL OFFER

Famous make. P.V.O. base on latest type plastic spools. Brand new, perfect, boxed and guaranteed.

1,200ft. on 7in. Spool 21/-

GEVAERT L.P. PLASTIC

1,700ft. (7in.). 35/-; 850ft. (5in.) 18/6; 210ft. (3in.) 6/6. Post: 1 spool 1/6. Orders over 80/-, post free.

All makes of RECORDING TAPE in stock. Standard, L.P. and double play. Write for our special Tape List. All mail orders promptly despatched post free.

SPECIAL OFFER OF TRUVOX DECKS



Mk. III. New and unused in maker's cartons. 2-speed, 3½ and 7½, three shaded pole B.T.H. motors. Twin track, high impedance heads. Push button controls. Takes standard 7in. spools. Size: 14½ x 12½in. Limited Number only. Fully Guaranteed.

LISTED AT 22 GNS.

LASKY'S PRICE **£14.19.6**

Carr. and Insurance, 12/6.

Full instruction booklet with circuit diagrams for amplifiers with each Deck.

CHOOSE YOUR HI-FI EQUIPMENT AT LASKY'S

Listen to and compare a full range of the leading makes and types at either of our addresses, assisted by specialist high fidelity staff. If unable to call, write for literature and information.

AMPLIFIERS

QUAD, ROGERS, LEAK, RCA, JASON, LINEAR, PAMPHONIC, DULCI, W/B, AVANTIC, ARMSTRONG, etc.

SPEAKERS

WHARFEDALE, GOODMANS, LOWTHER, G.E.C., LORENZ, PHILIPS, TANNOY, etc.

PICKUPS

COLLARO, GARRARD, CONNOISSEUR, LEAK.

B/J, ORTOFON, GOLDRING, etc.

TRANSCRIPTION TURNTABLES

COLLARO, GARRARD, LENCO, CONNOISSEUR.

TAPE RECORDERS

GRUNDIG, ELIZABETHAN, BRENNELL, TRUVOX, SOUND, VORTEXION, FERROGRAPH, ELON, HARTING, SIMON, REFLECTOGRAPH, STUZZI, TANDBERG, TELEFUNKEN, STELLA, WALTER.

F.M. TUNERS

DULCI, QUAD, LEAK, JASON, ROGERS, etc.

GABINETS

Wide choice including G-PLAN, NORDYK and CAPRIOL.

MULLARD 510 AMPLIFIER KIT

All specified components and your choice of transformers and chokes by Partridge, Haddon, W/B, Ellison or Gilson.
COMPLETE KIT and printed circuit as low as £9.9.0
 Details on request.
 Printed Circuit separately 22/8.
 Also available built ready for use. Price according to transformers used.

3-3 AMPLIFIER

Built to Mullard's exact specification, with 3 Mullard valves 1E24, EF86, EZ81. Complete with front panel
£8.8.0
 Post free.

3-WATT GRAM AMPLIFIER. 2 valve, ECL82 and EZ80 rectifier, double wound main transformer 100-250 A.C., tone control, record equalisation switch. Size 7 1/2 c. 3 1/2 in., max. height 4 1/2 in. Controls mounted separately. **LASKY'S PRICE, complete with knobs, 55/-.** Post 3/8.
MATCHED PAIR FOR STEREO 5 Gns. Post 5/-.

SPECIAL OFFER. SINGLE VALVE 2-WATT GRAM AMPLIFIER 35/-
 Post 3/8.

"LINEAR" AMPLIFIERS

"DIATONIC" 10-14 watt 12 Gns.
 "CONCHORD" 30 watt 15 gns.
 All other "Linear" Amplifiers in stock. Details on request.

C.R. TUBES

NEW UNUSED, GUARANTEED

16in. METAL CONE famous make type T901/B. 6.3 volt, .3 amp. heater, ion trap, 12-14 kv. E.H.T., wide angle, standard 38 mm. neck. Guaranteed. **LIST 516/0. LASKY'S PRICE £6.9.6**



FERRANTI 9in. type T9/3. 4 v. heater, triode, central base, standard deflection. **LIST 9 GNS. LASKY'S PRICE 50/-.**

FERRANTI 12in., types T12/44 and T12/84. **LIST 1210/0. LASKY'S PRICE 84/-.**

RE-GUNNED C.R. TUBES

Guaranteed for 12 months. **LIST 12in. round 48 10 0 12/6**
14in. rect. 48 10 0 12/6
16in. round 48 19 6 21/-
17in. rect. 48 19 6 21/-
21in. rect. 47 19 6 25/-

MINIATURE INSTRUMENT SOLDERING IRONS

Famous make, 250/250 v., 25 watts with pencil bit and 5-core dex. Warning light in handle. **LIST 22/6. LASKY'S PRICE 15/-**
 Post 1/3.

5-millamp METER RECTIFIERS. Special offer of limited number at only **8/6**
 Post 9d.

MAKERS SURPLUS TV COMPONENT BARGAINS

WIDE ANGLE 38 mm.
 Line E.H.T. Trans. Ferraz-cube core, 9-16 kv. 19/6
 Scanning Coils. Low imp. line and frame 19/6
 Ferraz-cube cored Scanning Coils and Line Output Trans. 10-15 kv. EY51 winding Line Trans. with width and linearity controls, circuit dia., pair. 50/-
 Frame Output Transformer 6/6
 Frame or line block osc. Transformer 4/6
 Focus Magnets Ferraz-core 19/6
 P.M. Focus Magnets, Iron Cored 19/6
 Duomag Focalliers 22/8
 300 m/s Smoothing Chokes 10/6

STANDARD 35 mm.
 Line Output Transformers 6.8 kv. E.H.T. and 6.3 v. winding. Ferraz-cube 17/6
 Scanning Coils. Low imp. line and frame 7/6
 Frame or line blocking oscillator Transformer 4/6
 Frame Output Transformer 7/6
 Focus Magnets: Without Vernier 12/6
 With Vernier 17/6
 200 m/s Smoothing Chokes 7/6

H.P. TERMS AVAILABLE on certain goods.
 Call or write stating your requirements.

ANOTHER SCOOP!
12-channel TURRET TUNER
 Leading make, new and unused. Complete with PCC84 and PCF80 valves and 8 sets of coils for five Band I channels and channels 1, 2, 3, Band III. I.F. 33-38 mcA. Limited number. Today's value £7.
LASKY'S 49/6
 PRICE
 Post 3/6



MULTI-TEST METERS

Famous make, new and unused. Further purchase, new reduction.
AN/87. 57-range, 5,000 ohms per volt A.C. and D.C., in black leatherette-covered wood case 7 1/2 x 9 1/2 x 3 1/2 in. **LIST 15 GNS. LASKY'S PRICE £9.19.6**
 Post 5/-. Leads, 7/6 extra.
AN/90. Pocket size 15-range, 5,000 ohms per volt A.C. and D.C., in black leatherette-covered case 3 1/2 x 3 1/2 x 1 1/2 in. **LIST 9 GNS. LASKY'S PRICE £5.19.6**
 Post 3/6. Leads, 3/8 extra.

TRANSISTORS

AUDIO P.N.P. Junction Types suitable for high gain and low freq. amplifiers, and for output stages up to 250 milliwatts. **7/6**
 (Double spot—yellow and green).
 3 for 20/-; 6 for 37/6, post free.
R.F. P.N.P. Junction Type suitable for medium and low freq. oscillators, freq. changers and I.F. amplifiers **15/-**
 (1.5 to 8 Mc/s.)
 (Double spot—yellow and red.)
 3 for 40/-; 6 for 75/-.
 Special prices for larger quantities.

SPECIAL OFFER. P.N.P. Junction type Transistors suitable for all audio applications. Each, 5/-.

OC44 and OC48, 21/-; OC70 and OC71, 12/6; OC72, 17/- (Matched Pair, 30/-); OC73, 16/-; OC16, 54/-.

BRIMAR. T81, T82, T83, 12/6; T84, 14/-; TP1 and TP2, 20/-; T31, T32, T33, 13/6.

EDISWAN MAZDA. The very latest types, XB/102, 10/-; XB/103, 14/-; XC/101, 16/-; XZ/101, 23/-; XA/102, 26/-.

SPECIAL OFFER. Set of 7 Ediswan Transistors: XA/101, XA/102, 9 XB/102, XB103, 2 matched XC/101. Price 79/6.

CRYSTAL DIODES. General Purpose GEX00, each 1/-. Per dos. 9/-. All other types in stock.

"GOLDTOP" POWER TRANSISTORS

All types in stock. Example—V15/10P. Ideal for output stage of car radio, will give approx. 3 watts operating from 12 v. Each 15/- post free. Suitable Output Transformer for above, correct ratio, matched to 3 ohms, 9/6. Post 1/-.
 Driver Transformer, 9/6. Post 1/4.

20,000 VALVES

Mullard, Brimar, G.E.C., Mazda, Cossor, E.M.I., Phillips, Pinnacle, Telefunken, etc.
 Send for our New List of manufacturers' surplus, ex-Govt. and imported Valves at lowest prices. We save you money.

SPEAKER COVERINGS

Large stocks of "Tygan" and "Some-weave." Any size piece cut. Samples and prices post free.

LASKYS FOR EASY-TO-BUILD SETS : TUNERS : AMPLIFIERS

Circuit Diagram and Building Instructions, 1/6 each, post free.	COMPLETE PARCEL
7-TRANSISTOR PORTABLE, 200 milliwatts p.p. output. Printed Circuit, 6 1/2 in. x 2 1/2 in.	£9.9.0 Post 3/6
TRANSISTOR SUPERHET TUNER, uses 3 R.F. transistors, 1 germanium diode, etc. Printed Circuit 3 1/2 in. x 3 1/2 in.	£5.12.6 Post 3/6
4-TRANSISTOR AUDIO AMPLIFIER, Mk. II, 200/250 milliwatts, with 2 OC72 and 2 yellow/green. Size: 5 1/2 x 2 x 1 1/2 in.	£3.19.6 Post 3/6
4-VALVE SUPERHET PORTABLE. Medium and long wave. Mains/battery version, £8.19.6. Battery version	£7.7.0 Post 3/6
WIDGET T.R.F. for 200-250 v. A.C. mains. Uses two latest double-purpose valves. Plastic case, 8 1/2 x 4 1/2 x 5 in.	£4.19.6 Post 5/-
LASKY'S F.M. TUNER. Printed Circuit version of the G.E.C. 912 "F.M. Plus," using 5 valves.	£7.19.6 Post Free
PORTABLE GRAM AMPLIFIER, 2-watts. Uses EL84 output and 6X4 rect. Size 6 1/2 in. x 3 1/2 in. x 5 in. high.	49/0 Post 2/6

LASKY'S CAR RADIO can be built for £12.19.6

Note these star features:
 ★ 12 volt operation
 ★ New hybrid circuit
 ★ Transistor output
 ★ New type Brimar valves
 ★ No Vibrator, 12 volt H.T. & L.T.
 ★ T.C.C. Printed Circuit and Condensers
 ★ Tuned R.F. stage
 ★ Medium and long waves
 ★ Permeability tuning
 ★ Small size. Will fit any car
 Send 1/6 for Instruction Booklet giving full details, illustrations, dimensions, circuit diagram and shopping list.

ALL JASON KITS IN STOCK. Send for Brochures

PLEASE NOTE 2 ADDRESSES FOR PERSONAL SHOPPERS

42 TOTTENHAM COURT ROAD, W.1.

207 EDGWARE ROAD, W.2.

Opposite Edgware Road Tube Station
 Few yards from Praed Street

Nearest Station Goudge Street.

MUSEum 2605

PADington 3271/2 and OUNningham 1979

Please address Mail Orders and enquiries to Lasky's (Harrow Rd.) Ltd., 207 Edgware Road, London, W.2.

OPEN ALL DAY SATURDAY
 Early Closing
 Thurs., 1 p.m.
 (Both addresses)

PRICES DOWN!! "THE TRANSISTOR-8"

- ★ Tunable over medium and long wavebands
 - ★ 250mW output push-pull
 - ★ Internal Ferrite aerial
 - ★ Highly sensitive and selective
 - ★ 7in. x 4in. high flux speaker
 - ★ All components identified and carded
 - ★ EDISWAN transistors throughout
 - ★ Easy-to-follow layout diagrams
- Car radio components 8/-; A.V.C. 4/3;
Size 9in. x 7in. x 3½in. Weight 4 lb.

Complete set of parts including cabinet and all components. Now
£10. 19. 6
P. & P. 2/6
All parts sold separately
FREE BOOKLET

325mW version £11/11/6. P. & P. 2/6.

Combined Portable/Car Radio
Push-Pull Portable Superhet



"THE MINOR"



The smallest transistor radio offered on the market. Case size only 3 x 2 x ¾in. Variable tuning over medium waves. Uses a three-stage reflex circuit of high efficiency. Total cost including Personal

phone; transistor; long life miniature battery; circuit and complete layout diagrams and all components:

★ Internal ferrite aerial **49/6** P.P. 1/6.

All components sold separately
Circuit, layout diagrams and shopping list free.

RED-SPOT TRANSISTORS

5/- EACH

WHITE-SPOT TRANSISTORS

8/6

FREE COMPLETE LIST

CAR RADIO 2-watt Amplifier

- ★ 7 x 4in. high flux speaker
 - ★ V15/10P power transistor
 - ★ Overall size 6 x 4 x 3in.
 - ★ Works off car 12-volt battery
- MAY BE USED WITH ANY BATTERY PORTABLE WITH 15-OHM OR 3-OHM OUTPUT TRANSFORMER.
Complete set of parts 65/- P. & P. 2/6
Unit built-up and tested 77/6 P. & P. 2/6

IDEAL FOR TRANSISTOR-8
USE YOUR PORTABLE IN YOUR CAR!

AUDIO GENERATOR

- ★ Ediswan XB104 Transistor. ★ Size only 2½in. x 1½in. x 1in.
 - ★ Large output. ★ Ideal modulator.
 - ★ Special chassis. ★ Layout diagrams.
- COMPLETE WITH ALL COMPONENTS, 25/-, P. & P. 1/-.
IDEAL POCKET TEST INSTRUMENT

"SUPER-SIX" TRANSISTOR PORTABLE SUPERHET



- ★ MEDIUM AND LONG WAVES
- ★ MULLARD TRANSISTORS
- ★ PRINTED CIRCUIT
- ★ SENSITIVE AND SELECTIVE

Complete set of parts including attractive cabinet
£9. 10. 0
P.P. 2/6
All parts sold separately

- ★ FERRITE ROD AERIAL
- ★ FULLY TUNEABLE
- ★ 3in. 150Ω SPEAKER
- ★ FULL ASSEMBLY INSTRUCTIONS

High sensitivity and selectivity combine to give excellent reception on both medium and long waves and is recommended by us as being the easiest to build transistor printed circuit set ever offered.

AC/DC PORTABLE RADIO

- ★ 5 valve superhet
- ★ Built-in frame aerial
- ★ Size 10in. x 10in. x 4in. deep
- ★ All Marconi valves Med., long and short waveband
- ★ OR Med. and two short wavebands
- ★ Gram. sockets (for crystal or magnetic pick-ups)
- ★ 7in. x 4in. elliptical speaker
- ★ Slow motion tuning
- ★ Ideal for a radio-gram

ONLY £7.12.6 post 7/6

Portable polished cabinet 27/6
Super portable rexine cabinet 37/6

REDUCTIONS TO VALVE LISTS

Full List on request

OZ4	5/-	16AM6	5/-	12AT7	8/-	DK91	7/-	ECL80	10/-	EZ81	7/-	UBC41	9/-
105	10/-	804	5/-	12AD7	7/8	DL91	7/-	EF22	7/8	KT39C	8/8	UBP89	9/-
1R5	7/-	6F12	5/-	12A8GT	10/-	DK96	8/-	V870	6/-	MU14	7/8	UCG88	9/-
1B4	7/-	813	65/-	12K5M	10/-	DL38	9/-	EP36	5/-	PCO84	9/-	UCG42	10/-
185	6/8	GT10	15/-	128N7GT	10/-	DL35	10/-	EP39	5/-	PCF80	9/-	UCI82	12/-
174	6/-	6L6G	8/-	128L7GT	10/-	DL92	7/-	EP40	11/6	PCL82	12/-	UP80	9/8
3A6	9/-	6L6M	10/-	OV135	5/-	DL94	7/8	EP42	11/-	PY80	7/8	UP85	9/8
3Q5	9/-	6Q7G	7/8	OV136	5/-	DL86	9/-	EP89	8/8	PY81	8/8	UP89	10/-
3E4	7/-	68L7	6/-	OV138	5/-	EB81	5/-	EP91	5/-	PY82	7/8	UL41	8/-
3Y4	7/8	68N7	6/-	OV140	5/-	EB041	9/8	EP92	5/-	VR105/30	6/-	UL54	9/-
5U4	6/-	6V6G	6/-	725A/B	55/-	EBF30	9/8	EL42	10/-	VR160/30	6/-	UY41	7/8
5Y3GT	6/-	6V6GT	7/8	2K25	65/-	EBF59	9/8	EM34	7/8	U50	6/-	UY85	8/-
6A7	9/-	6X4	8/-	DAF91	7/-	ECC81	8/-	EY61	10/-	U52	6/-	VR54	2/6
6A8GT	9/-	6X5GT	8/-	DAF96	9/-	ECC82	7/8	EY98	10/-	UABC80	9/-		
6AC7	5/-	7Y4	7/-	DF91	7/-	ECC81	5/-	EZ40	7/8	UAP42	9/-		
6AL5	5/-	7Z4	7/-	DF96	9/-	ECF80	12/-	EZ80	7/-	UB41	10/-		

MAJOR-2

(Two-transistor Pocket Radio)



69/6 COMPLETE POST 1/6

NEW BOOKLET FREE: All components sold separately
GOOD RECEPTION ANYWHERE!

- ★ 4-stage reflex!
- ★ Medium wave; tunable!
- ★ Very sensitive!
- ★ No aerial or earth!
- ★ Complete layout!
- ★ Over 6 months on one battery
- ★ 4½ x 3 x 1½in.
- ★ Weight only 4 ozs.
- ★ Personal phone

MAJOR-3



(AS DESCRIBED IN "R.C." SEPT., '59)
COMPLETE 87/6 P.P. 1/6

FANTASTIC OUTPUT. TERRIFIC RECEPTION. GUARANTEED ANYWHERE.

- ★ 5-stage Reflex Circuit
- ★ No Aerial or Earth.
- ★ Min. Volume Control.
- ★ 3 Ediswan Transistors.
- ★ Medium Wave Tuning.
- ★ Size 4½ x 3 x 1½in.
- ★ Personal phone.

SIGNAL TRACER

RF, IF AND AUDIO TRACING

- ★ 2-Ediswan Transistors
- ★ New Chassis; Improved Design
- ★ Easy to Use; Small Size
- ★ A must for the Amateur and the Professional

Complete set of parts including headphones, transistors, etc. **37/6** P.P. 1/6
FREE DIAGRAM ON REQUEST

MULTIMETER TYPE 666H: TRIPLET

1000 ohms per volt:
AC/DC 10/50/250/1000/5000 volts.
DC mA 10/100/500.
Resistance 300/250K.

79/6 P.P. 2/- with battery and leads.

NEW CONDITION: INCLUDES INSTRUCTIONS

POCKET MULTIMETER



MODEL A10: 500 Micro-amp Movement.

- ★ AC/DC voltages, 2000 ohms per volt; 10, 50, 250, 500 and 1000 volts.
- ★ Resistance 10kohms and 1 Megohm.
- ★ D.C. current 0.5 mA; 25 mA; 250 mA.
- ★ Decibel range. ★ DC ± 2% accuracy; AC ± 3%.

INCLUSIVE OF TEST PRODS. ILLUSTRATION BOOK AND BATTERIES

Size 5½ x 3½ x 1½in. Weight 17 ozs. **£4/17/6** P.P. 1/6

BRAND NEW AND GUARANTEED

Free Leaflet by return



RCA. AMERICAN VALVE VOLTMETER

TYPE 165-A

D.C. ELECTRONIC VOLTMETER.

6-Ranges. 3-10-30-100-300 and 1,000 volts. Input res: 11-meg. constant on all ranges. Sensitivity: 3,666,666 ohms per volt on 3v. scale.

A.C. VOLTMETER.

5-Ranges. 0-10-30-100-300-1,000 volts. Sensitivity: 1,000 ohms per volt

ELECTRONIC OHMMETER.

6-Ranges, from 0.1 ohms to 1,000 megohms.

Movement. 200 microamperes. D.C. accuracy $\pm 2\%$.

Input 110-250 volts A.C. Complete with Instruction Book and Test Prods, Brand New.

ONLY £12/10/- p.p. 3/6.

SPECIAL PURCHASE — LIMITED STOCKS — BUY NOW

V.H.F. TRANS/RECEIVER TYPE TRI920

★ 9.72 MC/S IF ★ 4-CHANNEL CRYSTAL CONTROLLED
★ 40 KC/S BANDWIDTH ★ 100 to 120 MC/S COVERAGE

Unit complete with 21 valves; crystal; 24 volt rotary power unit, etc., in metal case. In new condition with full circuit diagram.

£6/10/-, carr. 10/6.

Circuits separately, 1/9 post free.

V.H.F. TRANS/RECEIVER TYPE 1986

★ 9.72 MC/S IF ★ 10-CHANNEL CRYSTAL CONTROLLED
★ 23 KC/S BANDWIDTH ★ 124.5 to 156 MC/S COVERAGE

Sub-units	Type	With valves	Less valves	P.P.
TRANSMITTER	81	60/-	25/-	2/6
RECEIVER	114	25/-	7/6	2/6
IF Amplifier	476	32/6	12/6	2/6
Modulator	105	20/-	—	2/6
24 v. Rotary unit	3	15/-	—	2/6
10-way Control unit	382	6/-	—	9d.

All the above are in absolute new condition. Full circuits available, 1/9 post free.

AIRCRAFT RADAR TYPE AN/APA-1

Complete scope indicator unit with amplifier; aerial switching unit; full scope controls. Includes 3BP1 Tube; 6SN7GT; 6K6GT; 6G6GT; 2x 2; 6x 5GT.
BRAND NEW. FULL HANDBOOK. 97/6 P.P. 3/6.

AN/ARN-5D GLIDE PATH RECEIVER

3-channel U.H.F. Receiver; uses plug-in crystals (not supplied): operating on 332.6; 333.8; cd 335 Mc/s. Unit contains 7—6AJ5; 28D7; 2—12SN7; 12SR7; Relays, etc. BRAND NEW and boxed; a bargain at 59/6 P.P. 5/-.

SCR522 TRANS/RECEIVER

THIS FAMOUS UNIT complete with TRANS SWITCHES; I.F.'S; COILS; GEARING etc., etc., LESS VALVES IN NEW CONDITION. 15/- P.P. 5/-

QUARTZ CRYSTALS

FROM 5/- EACH

From 6 Kc/s-47 Mc/s. FT243, FT241, 10XJ and 87G. Send for list 500 types



METERS

500 microamp.	2in.	M.C. (DC)	F.R. 12/6
0-1 amp.	2in.	TC (RF)	F.S. 6/-
0-3 amp.	2in.	TC (RF)	F.S. 6/-
0-150 mA	2in.	M.C. (DC)	F.S. 7/6
0-30 mA	2in.	M.C. (DC)	P. 7/6
0-50 mA	2in.	M.C. (DC)	F.S. 7/6
0-100 mA	2in.	M.C. (DC)	10/-
0-30 amp.	2½in.	M.C. (DC)	10/-
5-0-5 amp.	2½in.	M.C. (DC)	P. 10/-
0-500 mA	2in.	M.C. (DC)	P. 15/-
0-1 mA	2½in.	M.C. (DC)	F.R. 22/6
0-400 mA	3½in.	M.C. (DC)	F.R. 59/6
500-0-500 mA	2½in.	M.C. (DC)	F.R. 25/-
0-75 amp.	2in.	TC (RF)	P. 6/-
0-20 volts	2in.	M.C. (DC)	F.S. 7/6
0-40 volts	2in.	M.C. (DC)	F.S. 7/6

PIRANI CONTROL UNIT
★ 6in. 1 mA. movement meter with mirrored scale.

★ Fully set Wheatstone Bridge.
★ Complete in best quality case.
★ Built-in galvo-shunt.

ONLY 85/- P.P. 5/-
Including circuit diagram

PIRANI DIFFERENTIAL LEAK DETECTOR

Includes:
★ 2-arm Wheatstone Bridge.
★ Best quality wood case.
★ Galvo-shunt.

ONLY 47/6 P.P. 5/-

MARCONI No. 19 SET CRYSTAL CALIBRATOR

CRYSTAL CONTROLLED OSCILLATORS: 10 Kc/s, 100 Kc/s and 1 Mc/s. On/OFF MODULATOR. With handbook. Unused. ONLY 79/6. P.P. 2/6

1933 RECEIVER CONTROL UNIT

BARGAIN OFFER 18 MINIATURE VALVES!!!! 8-EF91; 6-EF92; 2-EB91; EL91; IF'S; RELAYS, ETC., ETC. IN CASE.

95/- P.P. 3/6

MIXER UNIT TYPE 79

INCLUDES:—VCR139A Tube with screen 7-EF50 (RED); EF55; 4-EA50; 2-EB91; 5U4G; VU120; EC52; STANDARD MAINS TRANSFORMER, 200-250 v. 50 c/s. BRAND NEW £5/10/- P.P. 5/-.

CATHODE-RAY TUBES

2AP1	1in.	25/-
VCR139A	2½in.	35/-
3BP1	3in.	30/-
3FP7	3in.	12/6
3AP1	2½in.	30/-
Mullard DG7/5	2½in.	45/-
5FP7	5in.	20/-
VCR517C	6in.	30/-
VCR97	6in.	40/-
Screens for VCR97		7/6

P.P. 2/- any type.

"372" MINIATURE IF STRIP 9.72 Mc/s



The ideal F.M. conversion unit as described in "P.W." April/May, 1957. Complete with 6 valves, three EF91s, two EF92s and one

EB91, I.F.T.'s, etc., in absolutely new condition. With circuit and conversion data.

12/6 (less valves) 37/6 (with valves)

Postage and Packing 2/6 (either type)

RCA. SPEAKER

8in. P.M. In black crackle cabinet. Designed for "AR88" and communication receivers.

BRAND NEW 45/- P.P. 3/6

TRANSMITTER/RECEIVER

Army Type 17 Mk. II

Complete with Valves, High Resistance Headphones, Handmike and instruction Book and circuit. Frequency Range 44.0 to 61 Mc/s. Range approximately 3 to 8 miles. Power requirements: Standard 120 v. H.T. and 2 v. L.T. Ideal for Civil Defence and communications.

BRAND NEW 45/- P.P. 5/-

44-61 Mc/s. Calibrated Wavemeter for same, 10/- extra. P.P. 2/-.



SMITHS 8-DAY CLOCKS

BRAND NEW SEALED CARTONS, 6in. dial 8-day clock with detachable adjustable time switch.

ONLY 95/- P.P. 5/-

T • FULLY GUARANTEED CANNON AFFORDS

Factory revacuumed, all guaranteed 6 months Carriage and insurance 12/6d. Due to the exceptional demand and high quality of our tubes, we are able to maintain the following unusually low prices.

- 6501, 6504, 6505, CRM91, CRM92, MW22-7 MW22-14, MW22-140 MW22-17, MW22-18 £2/15/-
12FM, CRM121, CRM121A, CRM122, MW31-7 MW31-14C, MW31-17 MW31-18, TL2/54 £3/-/-
3/16, 3/21, 14KP4, 14KP4A, 108K, 121K, 141K 7201A, 7202A, 7203A, AW36-21, O14FM, CRM141 CRM142 MW31/18 MW31-74 ME36-24 MW36-44, T12-549 £3/10/-
17AP4, 17ASP4, 6706A, O17FM, CRM171 CRM172, MW43-43 MW43-64, 7401A £4/5/-
3/6A, 4/15, 6901A, O14BM, O17BM, CRM161 CRM162A, CRM162B, CRM163, MW41-1 MW43-80, TA15 £5/5/-
CR11M, CR11NM, CRM211, CRM212 MW53-20, MW58-80 £6/15/-

REGUNDED: 12 months' guarantee

- Excellent workmanship, carriage and insurance 12/6. MW31/16, MW31/74 121K, 12KP4 £5/10/-
MW36-24, AW36-21, 141K 14KP4, CRM141, CRM142 £5/15/-
CRM152A, CRM152B, CRM153 CRM171, MW43/64, 171K, 17ASP4 £6/15/-
MW53-20, MW63-80 CRM211, CRM212 £9/10/-

NEW: 12 months' guarantee

- Frustrated export, carriage and insurance, 12/6. MW31-74, MW36-24 £7/19/-
MW43-64 £8/19/-

Enquiries welcomed for any tubes not listed. Any new tube can be supplied at standard list price, plus carriage.

SPECIAL THIS MONTH'S BARGAINS

- 4-SPEED RECORD PLAYERS Latest B.S.E. TU9 Turntable, together with lightweight Staar Galaxy dual sapphire crystal turnover pick-up head. £3/10/- Carr. 3/- Truly amazing value at 50 ma., 6/6; 500 v. STEREO: Famous make single player. Stereo equipped. £6/19/- Carr. 3/- Unrepeatable at this price
100 CONDENSERS 10s. A must for your spare box. A well-balanced assortment of miniature silver mica and ceramic condensers. 3-10,000 PF. List value over 25. The best buy of the season. RADIO: Receivers, complete with valves, speaker and 6-volt vibrator pack. 6K7, 6K8, 6K9, 6V8. Suitable for adaptation as car radio. Ideal for workshop 29/-

COLLARO "CONQUEST" Hi-Fi 4-speed, 10 record Autochanger. Brand new, unused. £6/19/6 Limited Quantity or Carton containing 2 Players £13/-/-

P.M. SPEAKERS: Standard 3 ohm Tested top makes - performance guaranteed. 6in. 7/6 5in. 12/- 10in. 14/- 10 x 6in. 14/-

CO-AXIAL CABLE: Semi-air speed, low loss. 50 yard drums 22/6 carr. 2/- 6 drums 125/-, carr. 5/-

RECTIFIERS: Iron selenium, full wave bridge, 12 volt 3-4 amps. 9/6 Carr. 1/- £5 per doz. 250 v. 80 ma., 5/-; 250 v. 250 ma., 9/6; 500 v. 50 ma., 6/6; 500 v. 150 ma., 9/6; 1,000 v. 40 ma., 8/6; Contact cooled. 250 v. 50 ma., 7/-; 250 v. 250 ma., 19/6; 250 v. 300 ma., 23/6.

PRICES REDUCED AGAIN! SAME HIGH QUALITY TRANSISTORS Red Spot: 4/9; 3/9 each in 100s. White Spot: 7/6; 6/6 each in 100s.

AVO Standard Twin Unit £9/-/- Carr. 5/- Valve Tester
G73: Signal generator and wavemeter, 100 kc/s. 1 meg. crystal calibrator, precision attenuator. Top make £9/10/- Carr. 6/-

SIGNAL GENERATORS: Carr. 5/- B.S.R. L050A. L.F. 30 c/s.-18 kc/s. £9/10/-
POWER PACKS: Input 230 volts AC. 2 separate double smoothed outputs of 375, 500 or 820 v. at 200/250 mA. and 6.3 v. 5 a. 4 BU valves. Complete in transit case. £7/10/-. Less valves £6/10/-

MIRROR GALVANOMETERS By Evershed and Wigmore. Sensitivity 1.375 MMS per micro amp. at 100 CM scale distance 45 second period. Brand new, boxed with spares. A school laboratory must, order now. £3/19/-

TBS9: Transmitters £6/10/- Carr. 5/- Receivers £4/10/- Carr. 5/- OR £9/10/- pair. Carr. paid. 80ms modulating 80ms. 100-150 M/cs. Ideal for conversion to 2 metres

SCR522: Transmitter receivers. U.S.A. standard aircraft type. 100-140 Mc/s., less valves. 25/-, Carr. 5/-

RECTIFIER UNITS Suitable for charging. 230 v. in. 24 v. 1.2 A. bridge. 35/-, Carr. 4/-

GMV2: Transmitter/receiver; 12 volt D.C. or 230 volt A.C. 3 wavebands. Cost originally over £200. £12/10/- Carr. 6/-

I.T.V. CONVERTERS WITH INTERNAL POWER PACK. Well-known make, at a very competitive price, completely enclosed. Finished in hammered gold. Very compact. Can be put inside practically any T.V. Gain and Trimming controls. Listed at £7/7/- £3/10/- Carr. 3/6

CRYSTAL PICKUPS: STAAR GALAXY. Single hole mounting, lightweight adjustable needle pressure. For any 3- or 4-speed turntable. Amazing value.

1. With latest Steig and Reuter or Sonotone cartridge. Interchangeable with and similar to the Acos GF65. Excellent reproduction. 17/6 Cartridge only 15/-
TRANSISTORS AND DIODES. XA103 12/6; XA104 15/-; XB104 9/-; V15/10P 'Golport' Power transistor 19/-; G6T11 Power 19/-; Matched pair 33/-; Diodes, General Purpose 9d.; 8/- doz. Equivalent to GEX44 3/6.

C. R. TUBES

- EGR35 6/-
EGR30 12/6 EGR60 12/6
5FPY 17/6

Table of vacuum tube types and prices, including 6X4, 6X5, 6X6, 6X8, 6X9, 6X10, 6X11, 6X12, 6X13, 6X14, 6X15, 6X16, 6X17, 6X18, 6X19, 6X20, 6X21, 6X22, 6X23, 6X24, 6X25, 6X26, 6X27, 6X28, 6X29, 6X30, 6X31, 6X32, 6X33, 6X34, 6X35, 6X36, 6X37, 6X38, 6X39, 6X40, 6X41, 6X42, 6X43, 6X44, 6X45, 6X46, 6X47, 6X48, 6X49, 6X50, 6X51, 6X52, 6X53, 6X54, 6X55, 6X56, 6X57, 6X58, 6X59, 6X60, 6X61, 6X62, 6X63, 6X64, 6X65, 6X66, 6X67, 6X68, 6X69, 6X70, 6X71, 6X72, 6X73, 6X74, 6X75, 6X76, 6X77, 6X78, 6X79, 6X80, 6X81, 6X82, 6X83, 6X84, 6X85, 6X86, 6X87, 6X88, 6X89, 6X90, 6X91, 6X92, 6X93, 6X94, 6X95, 6X96, 6X97, 6X98, 6X99, 6X100.

VALVES

PRICES REDUCED GUARANTEED 3 MONTHS 24 HOUR SERVICE. FREE TRANSIT INSURANCE. All valves are new or of fully guaranteed ex-Government or ex-equipment origin. Satisfaction or Money Back Guarantee on goods if returned unused within 14 days. 4d. FOR LIST OF 800 TYPES. 10% DISCOUNT SPECIAL OFFER TO PURCHASERS of any SIX VALVES marked in bold type (15% in dozens). Post: 1 valve, 6d.; 2-11, 1/-

Table of vacuum tube types and prices, including 6A5, 6A6, 6A7, 6A8, 6A9, 6A10, 6A11, 6A12, 6A13, 6A14, 6A15, 6A16, 6A17, 6A18, 6A19, 6A20, 6A21, 6A22, 6A23, 6A24, 6A25, 6A26, 6A27, 6A28, 6A29, 6A30, 6A31, 6A32, 6A33, 6A34, 6A35, 6A36, 6A37, 6A38, 6A39, 6A40, 6A41, 6A42, 6A43, 6A44, 6A45, 6A46, 6A47, 6A48, 6A49, 6A50, 6A51, 6A52, 6A53, 6A54, 6A55, 6A56, 6A57, 6A58, 6A59, 6A60, 6A61, 6A62, 6A63, 6A64, 6A65, 6A66, 6A67, 6A68, 6A69, 6A70, 6A71, 6A72, 6A73, 6A74, 6A75, 6A76, 6A77, 6A78, 6A79, 6A80, 6A81, 6A82, 6A83, 6A84, 6A85, 6A86, 6A87, 6A88, 6A89, 6A90, 6A91, 6A92, 6A93, 6A94, 6A95, 6A96, 6A97, 6A98, 6A99, 6A100.

TRADE ENQUIRIES INVITED

SPECIAL TERMS AVAILABLE ON ALL VALVES IN HEAVY TYPE 25, 50, 100 PER TYPE OR MIXED PARCELS

Table of vacuum tube types and prices, including 6B6, 6B7, 6B8, 6B9, 6B10, 6B11, 6B12, 6B13, 6B14, 6B15, 6B16, 6B17, 6B18, 6B19, 6B20, 6B21, 6B22, 6B23, 6B24, 6B25, 6B26, 6B27, 6B28, 6B29, 6B30, 6B31, 6B32, 6B33, 6B34, 6B35, 6B36, 6B37, 6B38, 6B39, 6B40, 6B41, 6B42, 6B43, 6B44, 6B45, 6B46, 6B47, 6B48, 6B49, 6B50, 6B51, 6B52, 6B53, 6B54, 6B55, 6B56, 6B57, 6B58, 6B59, 6B60, 6B61, 6B62, 6B63, 6B64, 6B65, 6B66, 6B67, 6B68, 6B69, 6B70, 6B71, 6B72, 6B73, 6B74, 6B75, 6B76, 6B77, 6B78, 6B79, 6B80, 6B81, 6B82, 6B83, 6B84, 6B85, 6B86, 6B87, 6B88, 6B89, 6B90, 6B91, 6B92, 6B93, 6B94, 6B95, 6B96, 6B97, 6B98, 6B99, 6B100.

Post: 2 lbs. 1/6, 4 lbs. 2/-, 7 lbs 2/9, 15 lbs. 3/6. No C.O.D. Callers always welcome. (E.C. Weds.) ALL ITEMS LESS 5% & POST FREE IN DOZENS

TECHNICAL TRADING CO. 350-352 FRATTON ROAD, PORTSMOUTH P.O. BOX 21 (W)


SOUND/VISION AND I.F. STRIP. 7/9
Plessey. I.F.s 10.5 Mc/s sound. 14 Mc/s vision. 8 valve holders. Less valves. Size 8½ x 5 x 4½ in. Circuit incl. The tuner unit plugs directly into this chassis. P. & P. 2/6

SOUND/VISION AND I.F. STRIP. 2/9
Salvaged. Complete sound and vision strip. 8 valve holders. Less valves. I.F.s 16-19.5 Mc/s. Size 8½ x 4½ x 4½ in. Drawings free with order. P. & P. 2/6.

SOUND/VISION AND I.F. STRIP. 2/9
Salvaged. Superhet. 8 valve holders. Less valves. I.F.s 7.25 Mc/s sound. 10.75 Mc/s vision. Vision complete from input up to video output. Sound complete from input to A.F. amplifier. P. & P. 2/6.

TIMEBASE. 2/9
Containing scanning coils, line transformer, etc. less valves. Drawings free with order. P. & P. 2/6.

GANG CONDENSERS. 1/9
Salvage guaranteed. Standard size two gang. .0003 and .0005. All tested and guaranteed. P. & P. 1/3.



17" TV 19 GNS

(CASH PRICE)

OR 20/7 initial payment and 19 weekly payments of 19/11.

OR 11/1 initial payment and 35 weekly payments of 11/1.

(4 WEEKLY PAYMENTS IN ADVANCE plus 30/- Ins. and Carr.)

★ FEATURES ★


★ Beautiful latest finish cabinet in contemporary style covered and washable.

★ Polished legs 18in. optional extra for 25/-.

★ 17in. Rectangular Tube. Guaranteed fully for 12 months.

★ 12 channels. "Turret Tuned"—ITV/BBC. Extra coils at only 7/6 a pair (with order).

★ Chassis. 14 B.V.A. valves—salvaged but re-conditioned and guaranteed 3 months.



SUPER CHASSIS 79/6

5 valve superhet chassis including 8in. P.M. speaker and valves. Four control knobs (tone, volume, tuning w/change switch). Four w/bands with position for gram. p.u. and extension speaker. A.C. Ins. carr. 5/6.

CHASSIS. 1/-
6 or 8 valve latest type midget valve design for A.M. or F.M. Brand new. Cadmium plated. Size 12½ x 7½ x 2½ in. P. & P. 1/9.

T.V. CHASSIS at clearance prices.
THE POPULAR 12" PLESSEY CHASSIS. 9/6
A bargain for anyone wanting to make up their own T.V. at a very low cost. A chassis in one unit. Less valves and tube. Chassis size 12 x 14½ x 11in. I.F.s 10.5-14 Mc/s. Can be adapted for a 12-channel Turret Tuner and modified to take a larger tube. Carr. & Ins. 10/6.

IDEAL RADIO CHASSIS 39/6
5 volt Superhet A.C. Radio or Radiogram Chassis, 3 Wavebands and gram switched 8in. P.M. Speaker included. Valve line up 6K8, 6K7, 6Q7, 6V6 and 5Z4 (not included). Chassis size 19½ x 7½ x 9in. Knobs 2/- extra. Set of valves 45/9 extra. Complete 64/5/-. Insurance and carriage 5/6.



HOME RADIO 79/6

A.C./D.C. Universal mains 5 valve octal superhet. 3 waveband receiver can be adapted to gram p.u. In attractive wooden cabinet, 9½ x 18½ x 11½ in. Ins. carr. 4/6.

T.V. AERIALS. 23/6
For all I.T.A. channels. Outdoor or loft. 3 elements. P. & P. 2/6.

AERIALS. 15/6
B.B.C. indoor type. Folded dipole with 12ft. co-ax. cable fitted. Post 1/9.

T.V. AERIALS. 7/9
For all channels. Complete with co-ax. cable. For use indoors or in the loft. Postage 1/3.

CO-AX CABLE. 6d. YD.
Good quality. Cut to any length. 1/6 postage on 20 yds.

T.V. MASKS. 10/9
17in. Brand new. Latest pastel shades pink and blue. Post 2/-.

T.V. MASKS. 14/9
21in. as above. Post 2/-.

T.V. MASKS. 1/9
12in. round. Soiled. P. & P. 1/6.

T.V. MASKS. 7/9
17in. Brand new. Gray plastic. P. & P. 2/-.

INSULATING TAPE. 1/6
75ft. x ¼ in. tape in sealed metal container. Post 9d.

OUR LATEST ADDITION TO THE CHASSIS RANGE: A COMPLETE AND WORKING 17" TV CHASSIS 24 GNS.

Latest chassis including 17in. tube, permanent magnet speaker, 13 channel Turret Tuner (any two selected channels fitted) other channels supplied on request at 7/6 each.

13 valves. Line up as follows: 5-EF80s; 1-ECC84; 1-ECP80; 2-ECL80s; 1-PL81; 2-EB91s; 1-EY51. Chassis and valves guaranteed for three months. CRT. for 12 months full guarantee. Sound I.F. 19.5 Mc/s. Vision 16 Mc/s. A.C. only. Ready and working to fit into your own cabinet. Carr. and ins. 25/-.

As above with 14in. tube complete and working £19/19/-.

Nodark Overload Cut-out Switch 8/9

This will stop the search for that illusive fuse wire and the annoyance of repairing the fuse. Accidental crossing of wires or faulty connections will automatically throw the switch of the Nodark cutting the current to the fuses. It now only remains to rectify the fault and switch on the Nodark. 200-250 volt maximum load. 2-5 amps. A fraction of the list price. P. & P. 1/6.

REPLACEMENT RE-BUILT TV TUBES



£8-10-0
CASH PRICE

OR Yours for 8/6 initial payment (plus carr. and Ins.) and 19 weekly payments of 8/6

12 months full guarantee. All sizes except 10in. Completely re-built gun assembly new cathode heaters, etc., giving the high standard required for long picture life, quality and value. Carr. and Ins. 15/6.

EXPRESS DESPATCH SERVICE
Please phone to confirm tube in stock. Send Telegraph Money Order. Tube despatched passenger train same day. This service only available with remittance by a Telegraph Money Order and cash sales—not terms.

POWER PACK AND AMPLIFIER. 19/6
R.F. E.H.T. Amplifier stage 6v6 with O.P. trans. 3 ohms matching. Smoothed H.T. 350 volt at 250 m.a., 6.3 v. at 5 amp., 22 v. at 3 amp. 6.3 v. at 4 amp. and 4 v. centre tapped. Less valves. Drawings free with order. Size 14½ x 8 x 7in. Ins. carr. 5/6.

POWER PACK AND AMPLIFIER. 12/6
Output stage 6v6 with O.P. trans. 3 ohms. Choke smoothed H.T. 350-v. at 250 ma. 6.3 v. at 5 amp. 22 v. at 3 amp. 6.3 v. at 4 amp. and 4 v. centre tapped. Less valves. Ins. carr. 5/6.

TRANSFORMERS

DROP THROUGH TYPE. 12/9
350-0-350 volts at 250 m.a. 6.3 volt at 4 amp., 6.3 volts at 4 amp., 4 volt at 3 amp., 22 volt at 3 amp., 4 volt centre tapped at 1.5 amp. Primary 200-250 volt. 50 cycles. P. & P. 3/9.
350-0-350 volts at 250 mA 12/9. 6.3 volts at 5 amps. 4 volts at 4 amp. 4 volts at 4 amp. 4 volt centre tapped at 1 amp. Primary 200-250 volts., 50 cycles. P.P. 3/9.

SOLO SOLDERING TOOL. 12/6



110 v. 6 v., or 12 v. (special adaptor for 200/250 v. 10/- extra). Automatic solder feed including a 20ft. reel of Ersin 60/40 solder and spare parts. It is a tool for electronic soldering or car wiring.

Revolutionary in design. Instantly ready for use and cannot burn. In light metal case with full instructions for use. Post 3/6.

R.F. E.H.T. COIL. 7/9
7-10 KV. R.F. frequency approx. 22 Kc/s. Uses 6v6 or P61 as osc. Suitable for Ultra model V600, W700 and many other sets or replacing E.H.T. mains transformers. Ideal when using a larger tube. Size 4½ x 2in. dia. Base 4 x 4½ in. Circuit drawings available with order. P. & P. 2/6.

SCANNING COILS. 10/6
Low impedance. 38 mm. Brand new. P. & P. 1/3.

SCANNING COILS. 15/9
Wide angle 90 deg. 38 mm. Low impedance. P. & P. 1/3.

COLVERN PRESET POTENTIOMETERS. 2/9
Brand new. 200 ohms. 10K and 20K. P. & P. 9d.

FOCUS MAGNET. 9/9
Brand new. 38 mm. Incorporating picture shift control. P. & P. 1/3.



SUPER SUPERIOR RADIO 89/6

4 waveband. 5 valve superhet radio. 2-cone covered metal cabinet size 24½ x 12 x 10in. deep. 4 control knobs. Positions for gram., p.u. and extension speaker. A.C. only. Ins. carr. 8/6.

FAMILY RADIO. 99/6
5 valve (octal) superhet. A.C. 3 waveband and gram. position. 4 controls. Modern attractive cabinet size 15½ x 18 x 10½ in. in cream and brown. Carr. and Ins. 8/6.

ELECTRIC CONVECTOR HEATER. 99/6
Illuminated grille. Bronze finish. A.C./D.C. Size 26 x 18 x 7½ in. deep. Ins. carr. 10/6.

RECTIFIERS. 2/9
250 v. 100 m.a. Full or half wave. Salvage guaranteed. Why hunt for those obsolete rectifier valves when you can cheaply replace with a modern selenium rectifier. P. & P. 1/3.

DUKE & CO
TERMS AVAILABLE

TIME FLIES—BE PREPARED FOR XMAS!


RECORD PLAYER CABINETS



R.P.6. 29/6

Elegant cabinet, cloth covered in grey or red with sunken control panel and speaker fret. Size 13 x 17 x 8in. deep. Takes a B.S.R. Monarch 4-speed Auto-changer; 7 x 4in. elliptical speaker and most of the modern portable amplifiers. Carr. & Ins. 4/6.

R.P.4. 79/6



Stylish cabinet by famous manufacturer. Cloth covered in contrasting colours (red and grey). Grilled front controls panel. Size 15 x 19 x 8½in. deep.


Beautifully made—a cabinet you can be really proud of. Takes 4 speed B.S.R. Auto-changer, 6½in. round or 7 x 4in. elliptical speaker. Room for any amplifier of your own choice. Carr. and Ins. 4/6.



R.P.2. 69/6

A beautifully styled cabinet. Made by a famous manufacturer. In polka dot cloth with clipped lid and carrying handle. Size 16 x 14½ x 8½in. deep. Will take a B.S.R. Monarch 4-speed Auto-changer and 7 x 4in. elliptical speaker and most of the modern portable amplifiers. Carr. & Ins. 4/6.

R.P.3. 69/6



A delightful looking cabinet 14½ x 17½ x 8½in. in two-tone leatherette. Will take a B.S.R. Monarch 4-speed auto-changer and 6½in. round speaker. Carr. & Ins. 4/6.

AMPLIFIERS

12 Months Guarantee



PORTABLE AMPLIFIER MK. D.1. 59/6

Brand new. Latest design with printed circuit. Dimensions 7 x 2½ x 5in. A.C. only. Mains isolated. 2-3 watts output. Incorporating EL84 as high gain output valve. Volume and tone controls. Knobs 2/6 extra. P. & P. 3/6.

PORTABLE AMPLIFIER MK. D.2. 79/6

Printed circuit. Latest design. Dimensions 7 x 2½ x 5in. A.C. only. Mains isolated 3-4 watts output. Incorporating the latest ECL82 triode pentode output valve giving higher undistorted output. Volume and tone controls. Knobs 2/6 extra. P. & P. 3/6.

PORTABLE AMPLIFIER MK. D.3. 89/6

De luxe model. Printed circuit. Latest design. Dimensions 7 x 2½ x 5in. A.C. only. Mains isolated 3-4 watts output. Incorporating the latest ECL82 triode pentode output valve giving higher undistorted output. Volume, treble and bass control. P. & P. 3/6.

PORTABLE AMPLIFIER MK. D.4. 49/6

Brand new. By famous manufacturer. Especially built for portable record players. Dimensions 4½ x 3½ x 4in. A.C. only. 2 valves:—EL84 as high gain output valve; EZ80 as rectifier. Volume and tone controls. Knobs 2/6 extra. P. & P. 3/6.

PORTABLE AMPLIFIER MK. D.5. 39/6

Simple circuit employing ECL80 triode pentode output valve giving 2-3 watts output. A.C. only. Mains isolated. Single control for volume and on/off switch with knob. P. & P. 3/6.

STEREOPHONIC AMPLIFIER

£7. 19. 6

12 months guarantee.

Beautifully made for portable stereophonic record players. Latest design with printed circuit. Dimensions 3 x 5½ x 9½in. A.C. only. Mains isolated. Twin amplifiers each side giving 3-4 watts output. Incorporating ECL82 triode pentode valve. Full tone, volume and balance controls. Complete and ready to fit. Knobs 3/6 per set extra. P. & P. 3/6.

SINGLE PLAYER CABINET



R.P.7. 19/6

Smart cabinet. Size 14½ x 12½ x 6½in. deep. Various 2-tone colour schemes with white handle and piping. Takes T.U.9. B.S.R. single player unit, 7 x 4in. elliptical speaker and amplifier D.1 or D.2. Carr. & Ins. 4/6.

World's Finest Autochangers:— U.A.8. B.S.R. MONARCH 4-SPEED AUTOCHANGER £6-19-6



Incorporating auto and manual control complete with turnover crystal p.u. and sapphire stylus.

COLLARO CONQUEST 4-SPEED AUTOCHANGER £6/19/6

U.A.12. Latest B.S.R. Monarch 4-speed mixer £8 9 6

COLLARO CONQUEST STEREO AUTOCHANGER 11 gns.

T.U.9. B.S.R. 4-SPEED SINGLE PLAYER 89/6
P. & P. on above 5/6.

B.S.R. FUL-FI Crystal turnover cartridges. 19/6.

Brand new. Including sapphire needles for L.P. and Standard, giving fullest range and finest tone obtainable for any player. Can be fitted to all standard pick-up arms. P. & P. 9d.

MOTOR BOARDS. 2/6.

For 4-speed autochangers. P. & P. 1/3.

IDEAL FOR STEREOPHONIC SOUND!

EXTENSION SPEAKERS 19/9



Polished oak cabinet of attractive appearance. Fitted with 8in. P.M. speaker W.B. or Goodmans of the highest quality. Standard matching to any receiver (2-5 ohms). Switch and flex included. Ins. carr. 3/9.

8in. P.M. Speakers 8/9
With O.P. transformer fitted..... 10/-
6½in. P.M. Speakers 12/6


Postage 2/6

7 x 4in. Elliptical speakers 19/6

9½ x 4½in. " 22/6
Postage 2/9

BAKELITE CABINETS 5/9

Brand new. Colour brown. Attractive design. Size 12 x 7 x 5½in. Ideal for small receivers, converters etc. P. & P. 3/9.




PHOTOGRAPHIC SLIDE CASE

17/6



(List price £2/10/0)
Size 8 x 12½ x 2½in. deep. Will hold 150 of those expensive coloured transparencies in separate partitions. This is the answer to that aggravating search for that particular photograph and will, of course, keep them safe from damage. P. & P. 2/6.

STURDY CASE. 12/6



8½ x 7½ x 3½in. deep. Covered in burgundy and grey washable rexine. Strong clasp, hinges and handle. Ideal for portable radio chassis or Transistor set. Can be adapted as a record carrying case to hold 18 seven-inch long playing records. P. & P. 2/6.

A "must" for the build-your-own tape recorder enthusiasts:— TAPE RECORDER CABINETS. 19/6

Suitable for the Truvox Tape Recording Deck. Less front cast speaker panel. Size 13½ x 15 x 8½in. deep. Detachable lid with compartment for spare tape. Covered in green washable plastic material. P. & P. 4/6.



STEREOPHONIC CABINET. 99/6

Continental style cabinet including extra clip on speaker cabinet. 15½ x 10½ x 2½in. deep. Takes B.S.R. 4-speed stereo autochanger. Printed circuit amplifier. Two 8in. speakers. Carr. & Ins. 12/6.

We have in stock many different sizes and types of Record Player Cabinets at various prices all of which we are unable to illustrate here. It is therefore well worth a visit to our premises:—


DUKE & CO.

(Dept. G.10), 621/3 ROMFORD RD., MANOR PARK, E.12

Tel.: ILF 6001/3

CATALOGUE FREE UPON REQUEST

Making a Solder Gun



A 7-second solder gun of the type costing £3-64 was described in "Practical Mechanics." Only two essential parts are required—(a) the transformer and (b) the push switch. These we can supply at 13/6 plus 2/- post. The rest of the parts you will have in your own "junk" box. Copy of the article concerned given free with the kit.

Suppressor Condenser



Stop your drill or other appliances interfering with your or your neighbours' radio or television. Simple instructions given. 1/6 each. 12/- dozen.

Medresco Hearing Aid

As supplied by National Health, completely overhauled and in good working order with six month's guarantee. Only £2/15/- plus 2/6 post and ins. Complete with earphone and new ear plug but not batteries. These can be supplied as an extra for 5/- per set. Instructions showing how to convert to pocket radio available free if requested.



"Dim and Full" Switch

Particularly useful for controlling photoflood lamps which have only a short life at full brilliance. This toggle switch has three positions: the first position puts two lamps in series at half brilliance for setting up, the second position is off and the third position full brilliance for the operation shots. Also useful for controlling night lights, heaters, etc., etc. Price 2/0 each. Post 6d. Circuit diagram included.

Avo Proclips

The advantage of these test prods is that by pressing the trigger at the side they become crocodile clips and can be left in circuit. This is a great time saver when servicing. Price 15/- pair.



Tube Tester and Re-Activator



We can supply all the main components for making this unit which will not only test Cathode Ray Tubes but also will re-activate them, supplied complete with full instructions. Price £3, plus 2/6 post and ins.

R1155 for Spares



These are less valves but otherwise reasonably complete—ideal for spares—prices £2 to £4 depending on condition. Carriage 7/6.

Don't Stumble in the Dark



Install 2-ray switches. Our outfit comprises: 30 yards multi-core cable, two 2-way switches, two wood blocks. Full instructions, 9/6 each, post and insurance 2/6.

£100 WORTH OF EQUIPMENT 19/6



The famous B1154—unused but slightly soiled and not tested. Covers 200-500 kc/s. 3-5.5 Mc/s. and 5.5-10 Mc/s. Has unique "click stop" mechanism (7 stops) and permits selected frequency to be held, returned to, etc. Hartley oscillator, power amplifier, keying and speech. Wonderful breakdown value—meters, relays, switches. Complete with valves—real bargain at 19/6, plus 10/- carriage.

TELEPHONE REPEATER No. 1, MARK I



This equipment is for amplifying telephone signals in both directions of traffic and also to remedy line distortion of speech. It is intended for use with two wire or four wire circuits, has four amplifiers and is in fact two quite independent repeaters mounted on the same panel and having a common power supply. The power supply may be operated from a 12-volt car battery or from standard A.C. mains. The units are absolutely new in original packing complete with spares and instructional manual. Price £20 each.


THIS MONTH'S SNIP

Car Starter Battery Charger—due to a fortunate purchase we are able to offer you a fine ready-made high output battery charger in stove enamelled sheet steel louvered case. New, complete and ready to work, this charger is rated at 12 V. 4 amps. and has a variable rate selector for trickle charging, also a meter to show charging rate. Suitable for 230/250 A.C. mains. Made to sell at 85/- but offered this month at special snip price of 55/-, plus 3/6 post and insurance.




Dulci AM/FM Radiogram Chassis

Dulci AM/FM Radiogram Chassis. Chassis Model E.3. This has three wavebands, F.M. 87-101 Mc/s., Medium Wave 187-540 metres and Long Wave 1,000-2,000 metres, uses 7 of the latest miniature valves and built-in ferrite aerial. Why not modernise your Radiogram, get the best from modern records with this hi-fi 4 watt output chassis." Price £19/17/6, or £2 down and 20 fortnightly payments of £1/0/6. Hi-Fi Model H4 FF, £27/16/6 or £2/16/6 down and 26 fortnightly payments of £1/2/-.



FOUR ITEMS FOR PRICE OF ONE

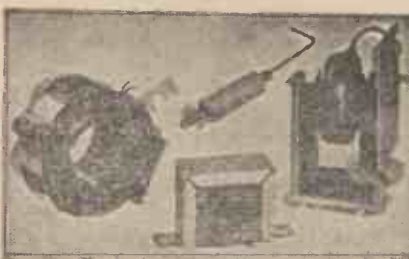

Set of modern TV. parts suitable for modernising old television or for a new one. For wide angle 14in. or 17in. tubes comprises: (1) Line output E.H.T. transformer. (2) 700 scanning coils on ferrite yokes. (3) Width control with ferrite core. (4) Frame output transformer. (5) Circuit diagram of a modern television. Offered at the price of the Line output transformer only, namely, 57/6, plus 2/6 post and insurance.

SUPER SENSITIVE (2,000 O.P.V.) MULTIMETER KIT

17 ranges including D.C. volts to 1,000 V. A.C. volts to 1,000 V. D.C., milliamperes to 500 ohms, to 2 meg. All the essential parts, including metal case, selected resistors, wire for shunts, selected switches, calibrated scale and instructions, 32/6, plus 2/6 post and insurance.

FOR ADDRESSES SEE NEXT PAGE

Connecting Wire



P.V.C. covered in 100ft. coils—2/9 a coil or four coils, different colours, 10/-, post free.

W.D. Circuit Details

Diagrams and other information extracted from official manuals. All 1/6 per copy, 12 for 15/-.

- A.1134
 - BC.348
 - BC.312
 - B.108A
 - BC.342
 - BA-1B
 - B-208
 - B-1155
 - B-1124A
 - B-1182A/B-1481
 - R-1147
 - R-1234A
 - B-1083
 - B-1085
 - B.C.1206-A/B
 - B-455-A (or -B)
 - B-454-A (or -B)
 - B-453-N-A (or -B)
 - Transmitter T1154
 - Fifty-eight walkie talkie
 - Frequency meter
 - B.C. 221
- R.109
 - HBO Receiver
 - E28/ABC6
 - R1116/A
 - RA-1B
 - AR89D
 - AN/APA-1
 - 78
 - 76
 - R.T.18
 - CAY-46-AA-M.
 - RADAR
 - A.S.B.-3
 - Indicator 62A
 - Indicator A.S.B.3
 - Indicator 62
 - Indicator 61K
 - R.F. unit 24
 - R.F. unit 25
 - R.F. unit 26
 - R.F. unit 27
 - Demobbed set No. 19
 - Demobbed valves

Cabinet Snip




This fine cabinet as illustrated but less control knobs is available this month at special snip price of 12/6, plus 3/6 post and insurance. Size is 13 1/2in. x 9in. x 4in. and it is nicely covered in two-tone I.O.I. fabric.

Racking Equipment

STANDARD POST OFFICE OPEN RACK 6ft. high and 19in. wide, heavy steel construction. Holes drilled and tapped at 7in. spacings. Price £3/15/-, plus carr. Similar rack but without the drilled and tapped holes. £2/15/-.




Rectifier Bargains



Selenium rectifier type 12, 500 V. & A. half-wave, easily rebuilt into full wave or multiple type, contains 30 35 mm. discs. Price 8/6, plus 1/6 post. Type 13, 36 volt 9 amp. easily rebuilt into six full wave charger rectifiers suitable for 6 or 12 volt batteries at 3 amps., contains 24 84 mm. discs. Real bargain at 19/6, plus 1/6 post. Type 14 240 V. & amp., 7/6.

**CABINET
SNIP**



Extremely well made portable amplifier case finished in two-tone and very modern in appearance. Large enough for stereo outfit with tape deck or autochanger. Snip price 59/6, plus 3/6 carriage and insurance.



Speaker Bargain



12in. Hi-fidelity loudspeaker. High flux. Permanent magnet type with standard 3 ohm speech coil. Will handle up to 12 watts. Brand new by famous maker. Price 32/6, plus 3/6 post and insurance.

Morganite Potentiometers

Single and 2-gang types available, standard size with good length spindle, all new and boxed. Single types each, valves available: 5K, 10K, 25K, 50K1, 100K, 250K, 1 meg., 2 meg. Gang type 3/- each—valves available: 5K + 5K, 100K + 100K, 1/2 meg., 2 meg. + 2 meg.



T.V. Service Sheets

200 sheets covering most popular post-war televisions by leading makers—Cosor, Ekco, Ferguson, Pye, etc., £2 post free. PREVIOUS PURCHASERS OF THESE SHEETS PLEASE NOTE: WE CAN SUPPLY SHEETS Nos. 100-200, £1, or 160-200, 10/-.

**Hi-Fi Snip
Infinite Wall Baffle**

Nicely veneered and polished. Corner fitting (attaches to picture rail). Takes up no floor space. Gives really fantastic results with only low-priced 8in. speaker. Fitting for tweeter. Only 45/- each. Carriage and insurance 3/6.



Stereo Outfit

Stereo Amplifier outfit comprising 7 watt twin channel amplifier for A.C. mains working and two 8in. P.M. Speakers on veneered and polished corner baffles. Whole outfit giving really terrific reproduction and amazing 3-D effects. £14 complete plus carriage and insurance. Or £1 down and 30 fortnightly payments of 10/-.

Assure your future

The ownership of a good instrument has been the turning point in many a famous career. You can own the latest Pullin Series 100 Test Set which is undoubtedly a most useful instrument by a firm long famous for fine instruments, entirely redesigned, it has a square movement with discum plastic cover, this makes for a brighter, more readable scale, extra scale length and wider angle of vision. With the test set is included a pair of combined test prods and crocodile clips also a stand for inclining the meter at the best reading positions. Ranges A.C. Volts: 0-10, 0-25, 0-100, 0-250, 0-500, 0-1,000, ditto D.C. A.C. Current 0-100 mA. D.C. Current 0-2.5, 0-10, 0-100, 0-500 mA. Resistance: 0-1M and 0-10K. All at 10,000 ohms per volt—Price £12/7/6 or £14/- deposit and 26 fortnightly payments of 10/-, non callers add 5/- carr. and insurance.



FREE GIFT!—All purchasers of the above items this month will receive Range Extender scale and data which add. capacity 2pF—1mFd, in two ranges. Inductance 0-100 henrys, etc., etc.

**Virtually a Transcription Unit
Philips AG2009 Record Player**

The Philips AG2009 Record Player, a modestly priced 4 speed unit with many outstanding features, is ideal for the enthusiast who is assembling his own equipment or modernising an older installation. The pick-up arm is wired for stereo and the Philips stereo head is available as an optional extra. Eddy Current Brake gives +2% fine adjustment on all four speeds.



Continuously variable pick-up playing weight (2-12gms.). Supplied with Philips Hi-Fi crystal head type AG3019, for microgroove and 78 r.p.m. Frequency response 30-15,000 c/s. Auto-stop and automatic release of idler wheel. Pick-up lifting and lowering device. Individually balanced heavy turntable. Wow and rumble of a low order. Muting switch fitted.

Can be used with any amplifier or radio set. Mains voltage range: 110-127 v. and 200-240 v., A.C.-50 cycles. Complete with monaural pick up £10/10/- or £1 deposit and 22 fortnightly payments of 10/- carriage etc. 5/-

NOTE. All H.P. prices now include 12 months insurance against accidental damage, loss, etc.

**Cabinet for Hi-Fi
Speaker System**

Acoustically designed bass reflex cabinet made by W.B. "STENTORIAN." Price £9/9/- or 20/- deposit and 19 weekly payments of 10/- Choice of several others available. Call or write for list. Add 5/- carr.



1960 All Mains Amplifier



Undoubtedly finest value obtainable in amplifiers—powerful three valve circuit ideal for dances, parties, etc. Complete with valves, mains transformers, volume and tone controls, but less chassis, speaker and cabinet. Price only 29/6 plus 2/6 post and ins. Data free with parts or available separately 1/6.

Beginner's Superhet

As supplied to many schools and colleges. A simple basic superhet—easy to understand and which can be progressively extended. Ideal for students—components include—valves—metal rectifier tuning condenser—I.F. transformers, etc. In fact complete superhet except speaker. Price £3 plus 3/- post and insurance. Data included free or sep. 1/6.



A.C./D.C. Multimeter Kit

Ranges: D.C. volts 0-5, 0-50, 0-100, 0-500, 0-1,000. A.C. volts 0-5, 0-50, 0-100, 0-500, 0-1,000. D.C. milliamperes 0-5, 0-100, 0-500. Ohms 0-50,000, with internal batteries. 0-500,000 with external batteries. Measures A.C./D.C. volts, D.C. current and ohms. All the essential parts including metal case, 2in. moving coil meter, selected resistors, wire for shunts, range selector, switches calibrated scale and full instructions, price 19/6, plus 2/6 post and insurance.



Dulci DPA10 Amplifier

Made by the Dulci Company. It is laboratory designed and is of the highest fidelity, has superb reproduction and complete freedom from hum, high output sensitivity, 10-watt output and ample feedback all combined to give a truly linear output. Uses all-glass miniature valves, including two EL84s in push-pull. Price £12/12/- or 25/- down and 26 fortnightly payments of 10/- Carr. & Ins. 6/6.




Unique Opportunity to build Fine Transistor Set

Constructor's parcel: to build Pocket 6 Transistor Set as currently being sold at £17/1/- Parcel comprises modified two-tone cabinet as illustrated, tuning dial, two gang tuning condenser, combined bakelite chassis/printed circuit and easy-to-follow circuit. Costing value £7/6—offered while supplies last at only 29/6, plus 2/6 post. Suitable for your own circuit or to build original circuit. All parts available at highly competitive prices. Do not miss this tremendous bargain.



The Skysearcher

1960 Version uses Mains Transformers. This is a three valve receiver kit using modern circuitry. Ideal as a second set for the bedroom, workshop, etc. All parts including mains transformer, valves, resistors, coils, etc., but not cabinet, chassis or speaker, 29/6, plus post and ins. 3/6. Data free with parts or available separately 1/6.



Band III Converters

Suitable for Walsley, London, Midlands, North, Scotland, etc. All the parts including 2 EF80 valves, coils, fine tuner, contrast control, condensers and resistors. (Metal case available as an extra). Price only 19/6, plus 2/6 post and insurance. Data free with parts or available separately, 1/6. Please send two more kits, the one you sent last week is performing magnificently. We receive this sort of letter every day of the week, so if you have hesitated because you thought our kits too cheap you need hesitate no longer.



If ordering by post, address your order to the Company nearest to you.

Electronics (Manor Park) Ltd.
520, High Street North,
Manor Park, E12,

Electronics (Ruislip) Ltd.
42-46, Windmill Hill,
Ruislip, Middx.
Phone: RUISLIP 5780.
Half day, Wednesday.

Electronics (Croydon) Ltd.
266, London Road,
Croydon.
Phone: CRO 6558.
Half day, Wednesday.

Electronics (Finsbury Park) Ltd.,
29, Stroud Green Rd.,
Finsbury Park, N4.
Phone: ARCHway 1049.
Half day, Thursday.

Wilkinsons

EST. 1921

METERS GUARANTEED

F.S.D.	Size	Type	Price
50 Microamps	2½ in.	MC/FR	70/-
100 Microamps	3½ in.	MC/FR	70/-
500 Microamps	2 in.	MC/FR	25/-
500 Microamps	2½ in.	MC/FR	37/6
1 Milliamp	2 in.	MC/FS	27/6
1 Milliamp	2½ in.	MC/FR	35/-
30 Milliamps	2½ in.	MC/FR	12/6
100 Milliamps	2½ in.	MC/FR	12/6
200 Milliamps	2½ in.	MC/FR	12/6
500 Milliamps	3½ in.	MC/FR	30/-
5 Amperes	2 in.	MI/FS	27/6
15 Amperes	2 in.	MC/FR	10/6
25 Amperes D.C.	2½ in.	MI/FR	7/6
50-0-50 Amp.	2 in.	MC/FS	12/6
30-0-30 Amp.	2 in.	MC/FR	15/6
20 Volts	2 in.	MC/FS	10/6
40 Volts	2 in.	MC/FS	10/6
300 Volts	2½ in.	MI/FR	25/-



CROSS POINTER METERS. 2 separate 100 microamp movements, 22/6. **MICROAMMETERS.** 50 F.S.D. 2½ in. proj. round. Scaled 10 Millirontgens, 45/-.

MICROMMETER. 250 F.S.D. 3½ in. F.R. Sangamo Mod. S.37. Scaled for valve voltmeter. Circuit available free. 55/-.

Postage 1/6 extra for above meters.
CATHODE RAY TUBES. 2AP1, 25/-, 139A 35/-, 5BP1 55/-, Post 3/-.
TRANSMITTER TUBE. 212E, 70/-, Post 3/6.
TEST PRODS. Retracting points, fused, flex and terminals, 5/6. Post 6d.
ONE POLE PLUG AND SOCKET. Fully shrouded, one hole fixing, 6 pr. 18/-, Post 1/-.

RELAYS P.O. TYPE 3000.



Built to your own specification

Keen Prices

Quick Delivery

Contacts up to 8-Changeover

MINIATURE RELAYS :

Siemens High Speed.		S.T.C. and G.E.C. Sealed.	
2.2Ω + 2.2Ω H96A	15/6	2 Ω 2 C O	4184GA 18/6
145Ω + 145Ω H96C	19/6	700 Ω 2 C O	418GD 19/6
500Ω + 500Ω H96D	22/6	2500 Ω 1 make HD	4186EE 22/6
1700Ω + 1700Ω H96E	25/-	2700 Ω 2 C O	4184GE 21/6
100Ω + 100Ω H85N	15/-	180 Ω 2 m 2 b	M1087 19/6
1000Ω + 1000Ω H95A	17/6	670 Ω 4 C O	M1092 21/6
1700Ω + 1700Ω H85L	17/6	2500 Ω 1 C O	M1022 22/6
		5000 Ω 2 C O	M1052 25/-

Comprehensive range available from stock.

SWITCHES. 1 hole fixing, 3 amp. 250 volt. 1/6 each, 12/- doz.

RACKS—POST OFFICE STANDARD. 6ft. high with U-channel sides drilled for 19in. panels, heavy angle base, 4ft. 10in. in stock.

ROTARY CONVERTERS. Input 12 D.C. Output 230 A.C. 50 cy. 135 watts. In fitted case with variable resistance, 0/300 voltmeter. The ideal job for television where A.C. mains are not available. £10, carr. 15/-.

SOLENOIDS. 12 volt D.C. with 3½ in. lever. Ideal for remote control, model railways. 5/- ea., post 1/6. Unit of 26. £4/6/8. Cge. 15/-.

NIFE BATTERY. Nickel cadmium. 6 volts 75 amp., crated and connected. Alkaline filled. Brand new, £7/10/-, Carr. 15/-.

LOUDSPEAKERS. Elac 5in. round 15/6, post 1/6. Axiom 150 dual cone 12in. 15 watts 15 ohms, fully dustproof, £7/19/6, post 7/6. Pye 10in. portable 3 ohms 50/-, carr. 7/6.

JACK PLUGS. Cylindrical bakelite screw-on cover, 2 contact 2/6, post 6d.

SOCKETS. One hole fixing for above, 3/6, Post 6d.

TELEPHONE PLUGS TYPE 201 with headphone cord. 3/- each, post 1/-.

VARIAC TRANSFORMER. Input 230 volts. Output infinitely variable 0-230 volts and 0-270 volts. 9 amp., bench or panel mounting. £15, cge. 12/6.

TERMINAL BLOCKS. 2-way 4/- doz. or box of 50 for 15/-, 3-way 6/- doz., 50 for 22/6. Post 1/6.

AIR BLOWER. 230 volt A.C. 15in. fan. Volume of free air at max. r.p.m. is 1,250 cu. ft. per min. At maximum efficiency 900 cu. ft. per min. Brand new £25, Carr. 20/-.

XPELAIR EXTRACTION FANS. 7½ in. blades. Baffle outlet 100/-, Cge. 5/-.

HEADPHONES. Balanced armature type DLR5. 10/8 pr., post 1/6.

HEADPHONES. High resistance 4000 type CHR, 12/8 pr., post 1/6.

HEADPHONES. Balanced armature type DHR, 17/6 pr., post 1/6.

LOUDHAILERS RE-ENTRANT TYPE all-metal 15in. diameter with mounting bracket £6/10/0, carr. 10/-, 18in. long by 12in. dia. with mounting bracket £5/10/-, carr. 10/-.

A LARGE AND COMPREHENSIVE STOCK OF WIRELESS AND ELECTRONIC COMPONENTS TELEPHONES




Easy to Fix
Wiring diagram Free

TELEPHONE SET TYPE "A" Ringing and speaking both ways on a 4-core cable. Very loud and clear over any distance. The handsets are as illus. and the set is complete except wire. 4-core at 8d. per yard or 2-core at 3d. per yard extra. Price 75/- set, post 3/6.

SET B. Two headphones connected to breast microphones, with leads, plugs and fitted carrying cases. Join instruments together with two wires and 1½ volt battery for a super Intercom, 25/-, post 3/6.

SET "C" Similar to set "A". Instead of P.O. Type handsets, two P.O. Desk Type Instruments are supplied with usual drawer in base. Complete ready for use. Price 150/-, post 7/-.

10 AMP BATTERY CHARGER



HERE IS YOUR CHANCE TO PURCHASE A BRAND NEW UNIT WORTH £40! FOR OUR SPECIAL PRICE £17.10.0
 Carriage 20/-.

Input 200/250 v. A.C. 50 cy. Output 10 amps., 22 volts D.C. Controlled by two 4-position switches for fine and coarse control which enables 6 to 24 volt batts. to be charged. Brand new with 0/12 ammeter. Fused A.C./D.C.

BATTERIES. Portable Lead Acid type, 6 volts 125 ampere hours. In metal case 16in x 8in x 11in. (Two will make an ideal power supply for our 12 volt Rotary Converters). Uncharged £6/10/- each, carriage 15/-.

UNI-PIVOT GALVANOMETER by Cambridge Instruments, 50-0-50 microamps, dia. 4 in. Knife pointer, mirror scale. Complete with leather carrying case. Ideal for laboratory use. £10, carriage 3/-.

FLIGHT TO GROUND SWITCHES. 5C/2828 as used on aircraft. Very robust, will carry a very heavy current 25/- each; or in pairs with auxiliary switch 50/-, post 3/-.

OSCILLOSCOPE. Type 43. With 3½ in. C.R.T. 138A, 4 — 617, 3—VR54, 524, VU120. Brand New with usual controls., power-pack and leads. Suitable for 230 volts, £10/10/-, carr. 12/6.

MOTORS 12/24 volts D.C. 0.3 amps. 3,500 r.p.m. 2½ in. x 1½ in. 15/6, post 1/6.

MOTORS 12 volts D.C. approx. 3,000 r.p.m. Size only 2in x 1½ in. with speed governor fitted in end cap. 12/6, post 1/6.

MOTORS. 12 volts D.C. Reversible. 2in x 1½ in. Spindle ½ in. x ½ in., 10/6 each, post 1/6.

SYNCHRONOUS MOTOR. 200/250 volts A.C. 60 r.p.m., suitable for electric clocks, etc., 25/-, post 2/6.

SYNCHRONOUS MOTOR. 200/250 volts A.C. 50 cycles with gear train driving 5 dials 1/10th hr.—10,000 hrs., 27/6, post 2/6.

MAINS MOTOR. Capacitor 230 v. A.C. 1/40th hp 1,400 r.p.m. 55/-, post 3/-.

GEARED MOTOR for model maker, small but powerful, 12/24 volts A.C./D.C. 4/8 r.p.m., 35/- post, 2/6.

GEARED MOTOR 220/240v AC 175 r.p.m. torque 15lb.in. Klaxon, £10, cge. 15/-.

MAINS TRANSFORMER WITH RECTIFIER mounted on top. Giving a D.C. output of approx. 30 to 40 volts 1 amp. Price 27/6 each, post 2/6.

SELENIUM METAL RECTIFIERS. Charging Rectifiers Full Wave Bridge


12 Volts 1 Amp	8/6 each	24 Volts 1 Amp	13/- each
12 Volts 2 Amps	13/6 each	24 Volts 2 Amps	24/- each
12 Volts 3 Amps	16/6 each	24 Volts 3 Amps	28/- each
12 Volts 4 Amps	20/- each	24 Volts 4 Amps	36/- each

Discounts for quantities of above charging rectifiers.

MAINS TRANSFORMERS to suit above rectifiers.

12 Volts 1 Amp	12/6 each	12 Volts 4 Amps MT5	25/- each
12 Volts 2 Amps	24/- each	12 Volts 4 Amps CT107	29/6 each
12 Volts 2.5 Amps	22/- each	24 Volts 3 Amps	25/- each

RESISTORS EX STOCK IN QUANTITY WIRE WOUND, HIGH STABILITY CARBON ETC., BEST MAKES AT LOWEST PRICE.



ELECTRO-MAGNETIC COUNTERS
 COUNTING UP TO 9999

Type 16A
 2,300 ohms 75/230 v. C.D., 15/- each. Post 1/6.

Type 17A
 3 ohms 2/6 v. D.C., 15/- each. Post 1/6.

VEEDER-ROOT MAGNETIC COUNTER. General purpose type with zero re-set. 800 counts per minute up to 999999. 48 volt D.C. 55/-, post 2/6.

MAP READING LAMPS, EX-R.A.F. NAVIGATOR'S CHART MAGNIFIERS 3in. lens complete with batteries, bulb and dimming switch 12in long. 37/6, post 2/6.

THERMOSTAT SATCHWELL. 12in. stem 0/250 volt A.C./D.C. 15 amps A.C. 10 to 90 degrees cent. 25/-, post 2/6.

ROOM THERMOSTAT. Adjustable between 45 and 75 deg. Fahr., 250 v. 10 amp. A.C. Ideal for greenhouses etc., 35/-, post 2/-.

THERMOSTAT. For frost protection, on at 34 deg. F., off at 49 deg. F. 1½ amps. at 250 volts, adjustable, 4/6, post 1/-.

SIMMERSTAT BY SUNVIC Plug-in type with knob control, 15 amps 3-pin, 200/250 volts, 35/-, post 2/-.

L. WILKINSON (CROYDON) LTD.
 19 LANSDOWNE RD. CROYDON SURREY

Phone CRO 0839 Grams WILCO CROYDON

BENEFIT FROM WHOLESALE BUYING! GET EQUIPMENT THAT'S IN TIP-TOP CONDITION. GET IT FROM IRONGATE — ENGLAND'S LEADING EQUIPMENT WHOLESALERS

WORLD FAMOUS TELEPHONES "F" Type
IN ATTRACTIVE CASE



The best portable telephone ever made. With a range of up to 5 miles. Ideal for

FACTORIES, BUILDING SITES, FARMS, CIVIL ENGINEERING PROJECTS, OUTSIDE BROADCAST UNITS AND OFFICES.

2 perfect sets in individual carrying cases, complete with long life batteries, bells, magneto and 100ft. telephone cable.

£7.10.0 per pair. Carr. 9/6.


Tele "F" High Power as above, but complete with amplifier, £6/10/- each. Carr. 12/6

DON Mk. V TELEPHONES. Few remaining, complete with 100ft. telephone cable £5/11/- per pair. Carr. (G.B.) 9/6.

D3 STRANDED TELEPHONE CABLE, NEW. Mile drum 85/- Carr. 17/6.

ENGLAND'S LARGEST STOCKS OF TELEPHONE EQUIPMENT

HEAVY DUTY L.T. SUPPLY UNIT by S.T.C.



Normal cost over £100

Essential equipment for Electronic Engineering, research laboratories, schools, etc. Guaranteed for 20 amps.

Output: D.C. Variable up to 20 amps. and 24V or trickle charge 125/350/700 ampere hours.

Input: A.C. 100/260 volts 45/65 cycles.

Size: 16 x 24 x 32in. high.

Available in Grey Cabinet.

ex-Warehouse **£22-10-0**
(Circ. diags. and instru. loaned for 10/- deposit)

EX-GOVT. PUBLIC ADDRESS SYSTEM



Complete with amplifier unit, 4 speakers, microphones, headphones and all spares packed in wooden cases. 6 or 12 volt D.C., handling capacity 8 watts, ideal for cars, boats, factories, etc.

£15.15.0 Carr. 30/-

TRUVOX NEW LOUD HAILERS' Impedance 7½Ω. Handling capacity 8 watts' 18/6. P. & P. 3/6. Or 35/- per pair. P. & P. 7/-

VARIAC TRANSFORMERS
Brand New



OUTPUT (2KVA) Completely Variable 0 to 270 volts. 9 amps.

INPUT 230 Volts, 50/60~

A SHROUDED FULLY VARIABLE TRANSFORMER FOR BENCH OR PANEL MOUNTING

SIZE:—Approximately 8½ Cube.

WEIGHT:—Approximately 30 lb.

PRICE—RIDICULOUS, ONLY £15.0.0

Plus 12/6 carr., supplied and boxed new

TAKE ADVANTAGE OF OUR SPECIAL WHOLESALE OFFERS!!

MINIATURE RELAYS SIEMEN'S

High Speed Sealed one platinum change-over

H98A, 2.2Ω + 2.2Ω	15/6 each
H98B 50Ω + 50Ω	17/6 each
H98C 145Ω + 145Ω	19/6 each
H98D 500Ω + 500Ω	22/6 each
H98E, 1,700Ω + 1,700Ω	25/- each

Vibrators 12 v. Malloy (new and boxed) 48/-
Headphones DLR1 (pairs)..... 54/-
Earpieces. Balanced armature ITB/5, sound powered 48/-
Earpieces. Low resistance 50/13466... 30/-
Microphones—10/12570 with switch 30/-

G.P.O. Telephones. Lamp signalling 85/- each
Ideal for intercom. use..... 12/24 v.—0/P

ROTARY TRANSFORMERS. 1/7 12/24 v.—0/P
265 v. 120 mA or 500 v. 26mA (made by Delco) 27/6

GUARANTEED METERS
(New & Boxed)

50 Micro amp. M/C. 2in. flush circ. Scale Rotagene	49/6 each
500 Micro amp. M/C. 2½in. flush square. Scale 0-150-800 V.	22/6 each
5 Milliamp. M/C. 2in. flush circ. Scale 0-20 amp.	12/6 each

MICRO SWITCHES
BURGESS
BRAND NEW
MINISTRY RELEASE
(MK. 4 BR. METAL BODY)
UNIVERSAL CONTACT
A.M. Ref. 50/4098
Compare this remarkable almost half-price offer.

78/- per Doz. (min. quantity) £25 per 100

AERIAL MASTS
IMPROVED TYPE 50 MK II
36ft. HIGH



Kits comprise—6 2½ in. dia. Tubular Steel Sections of 6ft. length, top-section and base, Flocks, Guys and Fittings. YOU can purchase this normally expensive MAST for a fraction of its cost. Please add £1 for (returnable) wooden carrying case. The MAST is particularly suitable to take aerials for Tx., Rx., F.M. and T.V. (especially COMMERCIAL) and has many other uses. Extra 6ft. sections can be supplied at 17/6 per section.

£8.10.0 only Carr. 15/6

U.S.A. Type 45ft. TELECOM. AERIAL MAST. (7 sections, 6ft. 8in. x 2½in. guys, etc.) This entirely complete set in carrying case 12½ Gns. Carr. 17/6. Or 2 sets for £25. Carr. extra. British Manufacture only.


ARMY TYPE 32ft. MASTS similar to above but 10 tin. screw-sections, suitable for permanent lightweight installation. Kit in canvas bag, £5/10/-. Carriage 12/6.

CONSTANT VOLTAGE TRANSFORMERS
FERRANTI 7½-KVA MOVING COIL

Stabilized output voltage in the range 200-250 v. Plug-board tapping. The selected output voltage is constant with ±¼% at all loads 0 to 30/87½ amps. when the supply voltage is varying over the range +8% to -12%.

- Frequency compensated 45-55 and 64-66 o/s.
- Excellent output wave-form.
- Can be used as a variable transformer.
- Unused. Complete with spares and instruction book at a fraction of the normal cost, only £65.

ROTARY CONVERTERS. 12 v. D.C. input. 230 volt A.C. 150 watts, 50 cycles output. Housed in wooden case and fitted with voltage control slider resistance, switch, plugs and A.C. mains voltage output check meter. Supplied in perfect condition. Individually tested, £9/19/6 each. P. & P. 10/-.



DYNAMO EXPLORER Mk. II
For detonating explosive charges.

A must for mining, demolition, road building and construction operations. May also be adapted as photo-flash generator giving 1,800 volts D.C. across o/p. terminals.

In Hide leather case



(Usual price 17gns.)
Our price **8½ GNS. each**
P. & P. 5/-

TELEPRINTER EQUIPMENT
CREED-TELEPRINTER 7B Reperf.
Type 7TR/3

Reperforators, Auto Transmitters, 80 + 80 Rectifier Units for Computer manufacturers.



85/-
P. & P. 12/6

U.S.A. R-9B/APN-4 Radio Receivers.

First class for conversion, originally designed for R.D.F. Valve line-up: 1-6B 7GT, 4-6B7GT, 1-6B7GT, 1-VR106 -30, 1-5U4G, 1-6EH-GT, 1-6B7GT, 3-6B4G, 2-879/2-2, 1-6B7GT.

Chassis also 20 x 9 x 1½in. Weight 26lb. Brand new. Components value (transformers, condensers, switches, etc.) far exceeds this remarkable low price. Buy now. Only 150 sets available.

THE IRONGATE (M.O.) CO.,
2/4 IRONGATE WHARF ROAD, PRAED STREET, LONDON, W.2. **PAD. 2231/2/3**

BENSON'S BETTER BARGAINS

INDICATORS, type 277, with lin. C.R.T., 4/VR91, 2/VR92, 37/6 (p.p. 3/6). Type 101, with VCR530 (94in. Blue, magnetic. Octal base), and 2/EB91, S/EF91, 2/R10; new cond. 30/-. (Post 3/6). Type 1, with VCRX263, 2/EF52, 5/6J6, 1/6V6, 1/EY51, 2/EB91, 3/EF91; combines RF EHT Generator and 28 kc/s. xtal, 45/- (Rail 7/6). Type 97 with VCR517, 10 valves, 30/-. (Rail 7/6).
HEADPHONES, CLR. with carbon breast-mic., 10/6. CR100 Noise limiter assemblies, with valve, 3/6; BC434A Control boxes, 7/6.
NEW M.C. METERS, 34in. round flush, 50µA., 70/-; 100 µA., 65/-; 1 mA., 55/-; 2 mA. (rectified), 45/-; 24in., 1 mA., 22/6; 2in. 100mA., 200 mA., 300mA., each, 8/6; 24in. 20 v. A.C., 8/6; 2in. 40 v. 8/6; 300 v. A.C. 24in., 15/-. Cross-over needle type 2x1 mA., 8/6. 2in. square, 150 A.-0-150 A. (less shunt), 5 mA., 7/6. **VIBRATORS**, Mallory G634C 12 v. 4-pin. 7/6. R1155B, good condition, tested, with handbook, £7/10/- (Rail 10/-). 8CR522 Modulation or Driver Trans., either 7/6. **CONVERTERS (ROTARY)**, 24 v. D.C. to 50 v. A.C. 4 A., 40/- (rail 7/6). **MORSE TRAINER SET** with buzzer and key wired for 4 1/2 v. battery, 8/6. **DRIVES:** slow-motion Admiralty 200:1 ratio, scaled 0-100, 5/6. R1155 S.M. "N" type, new, 10/6. **VIBRAPAK**, 6 v. D.C. to 250 v. 60 mA., smoothed cased, 22/6. 12 v. to 250 v. 60mA., 18/6 (p.p. 7/6). **DYNAMOTORS** (post 3/6); 12 v. to 250 v. 60 mA. and 6.3 v. 2.5 A., 11/6; 6 v. to 250 v. 60 mA., 11/6. Type 2 A. Input 12 v. Outputs 300 v. 240 mA., 150 v. 10 mA., 6 v. 5 A. filtered, cased, 25/-. **TRANSFORMERS**, vibrator, input 11 v. output 265 v. (19 set type), 7/6. Morse Key, covered with plug, 5/6. **CONDENSERS**, variable, 55-55-35 pfs. (3 gang) 4/6. Potentiometers, miniature wirewound, 6Ω, 1k or 2k, each 1/-. **USA RELAYS** (Collins type) 12 v. DPDT & SPST, ceramic, 7/6. **VALVES:**—CV2160 (ESU77) 50 kV. 150 w. Rectifier; GES base, 25/-. **CHOKES**, LF 10H 200 mA., 8/6; Potted 10H 100 mA., 7/6. "C" 5H 400 mA., 10/6. **SWITCHES**, toggle, U.S.A., DPDT, 1/6. **I.F. STRIP 373**, new with valves, 37/6. R.F.26, R.F.27, good cond., 18/- (p.p. 3/6). **METAL RECTIFIERS:** 240 v. 100 mA., 4/-; 240 v. 30 mA., 3/6; 600 v. 30 mA., 5/6; 240 v. 80 mA., 5/6; 30 mA., 1,000 v., 7/6. **VARIOMETERS** (19 set), new 15/-. Mic inserts, G.P.O. carbon, 2/6. **EARPIECES**, inserts, bal. armature type, 2/6. **VALVEHOLDERS**, U.S.A. Octal, doz., 4/-. **POTENTIOMETERS**, 100 k. or 500 k., new, doz. 5/-. **ACCUMULATORS**, 2 v. 4AH 2 1/2 x 3 1/2in. 7/6. **TX. VAR. CONDENSERS**, 3 kV. test; 2 or 100 pf., each 7/6. **MONITOR** Type 56 (2 units-Oscilloscope and power unit), 28/10/- (rail 20/-).
LIST AND ENQUIRIES: S.A.E. please. Terms, C.W.O. Postage extra. Immediate despatch.

Callers and Post: W. A. BENSON (WW), 136 Rathbone Road, Liverpool, 15. SEF 6853
 Callers: SUPERRADIO (Whitechapel) LTD., 116 Whitechapel, Liverpool, 2. ROY 1130

CONDENSERS


AR88 FILTER PACK. 3x4 mfd., 500 v. (new) 25/- each. P.P. 3/6.
BLOCK PAPER CONDENSERS
 0.25 mfd., 2 kv. wkg., 2/8 each. 1 mfd., 400 v. wkg., 2/8 each. 1 mfd., 2 kv. wkg., 3/6 each. 2 mfd., 600 v. wkg., 4/- each. 3 mfd., 400 v. wkg., 4/- each. 4 mfd., 400 v. wkg., 4/6 each. 4 mfd., 1 kv. wkg., 5/6 each. 6 mfd., 400 v. wkg., 5/6 each. 8 mfd., 1,200 v. wkg., 11/6 each. 0.1 mfd., 4 kv. wkg., 4/6 each. 0.5 mfd., 5 kv. wkg., 7/6 each. 0.5 mfd., 2 kv. wkg., 2/6 each. 1 mfd., 750 v. wkg. 3/- each. 3 mfd., 400 v. wkg., 3/6 each. 2 mfd., 1.5 kv. wkg., 4/6 each. 3 mfd., 400 v. A.C. wkg., 5/- each. 4 mfd., 600 v. wkg., 5/- each. 4 mfd., 2 kv. wkg., 6/6 each. 8 mfd., 800 v. wkg., 4/6 each. 10 mfd., 440 v. A.C. wkg., 12/6 each. 60 mfd., 300 volts A.C., 22/6 each. P.P. 3/6.
VISCONOL TYPES, 10 mfd., 3 kv. wkg., 25/- each. 10 mfd., 1.5 kv., 15/- each. 6 mfd., 1 kv., 12/6 each. 8 mfd., 2.5 kv. wkg., 22/6 each. 2 mfd., 1 kv. wkg., 8/- each.
GRAHAM GEARED MOTORS. 115 volts A.C. 50 cys., 1/6th H.P., variable speed gearbox 0-166 R.P.M. (as new). 23/10/- each. Transformers to operate this unit 35/- each. Carr. 10/-.
AMERICAN L.T. TRANSFORMERS. Potted type, finished in black enamel and very conservatively rated. (1) 230 v. input, 3x5 volts CT., at 3 amps. each and 4 volts at 2 amps. output, 18/6 each. (2) 230 v. input 2x6.3 volts CT., at 3 amps. and 6.3 volts at 3 amps. output, 18/6 each. (3) 230 volts input, 2x6.3 volts at 3 amps., and 6.3 volts CT., at 3 amps. output, 17/6 each. (4) 230 volts input, 28 volts at 2 amps. and 2 volts at 1 amp., 12/6 each. (5) 230 volts input, 3x6.3 volts at 3 amps. CT., 1. 6.3 volts 3 amp., 22/6 each. (All these transformers are new and boxed, please include postage 3/6 each.)
MODULATION TRANSFORMERS as used in the BO 640, 40 watts, modulate two 811's, 39/6 each, brand new, boxed, 3/- post.
AMERICAN COMPUTERS AN-II-70A. Single parallax. Contains 8 relays 10 k., 2 change-over plat. contacts, 8 relays 300 ohms, 2 change-over silver contacts (all relays are small type), 3x6V6 small GT., 3x6X5 GT., and 2 6BN7. Seven small D.C. motors 27 v., 6 selenium motors, 10 small micro switches. Plus gears, condensers, ball bearings and pots, etc. This unrepeatable bargain £10 each.
FUSE HOLDERS. U.S.A. type, panel mounting, 2/8 each, post 6d.
SCR. 522 TRANS./REC. 100/166 Mc/s., as new, 25 each. P. & P. 12/6.
WHEATSTONE BRIDGE. In a beautiful oak case, centre zero galvanometer, 2.5 ma., F.B.D., 4 stud switches 0-10, 0-100, ohms 0-Inf., size 16 x 7 1/2 x 6 in., 30/- each. Post 3/-.
RE-ENTRANT SPEAKERS. 16 ohms 20 watts, good cond., £4 each, postage 12/6 each. Quotations for six or more.
TRANSFORMERS. 200/250 v. (double wound) 115 v., output 60 amp. in steel case with switch etc., £15 each, postage £1. Weight 3 cwt.
METERS, scaled 0-600 v. and 0-15 v., 500 microamp movement, new, boxed, 12/6 each (2in. flush).
MICROPHONE (Canadian C3). New boxed complete with lead and standard jack plug 6/-, post 1/-.

PLEASE INCLUDE POSTAGE ON GOODS
 TERMS C.W.O. All goods offered are ex-W.D. S.A.E. for enquiries

W. MILLS

3-B TRULOCK ROAD, TOTTENHAM, N.17
 Phone : Tottenham 9213 & 9330

SOUTHERN TECHNICAL SUPPLIES
 TRANSFORMERS FOR ALL MULLARD AMPLIFIERS

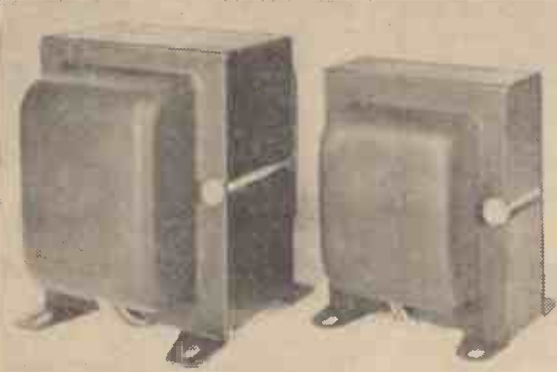

OUTPUT TRANSFORMERS (Secondaries for 3.75 and 15 ohms)
 T.44. 5-10 amp. ultra linear, 8,000 ohm. 43% tapplings 30/- P/P 2/-
 T.182. 5-10 amp. and Oesram 912. 6,000 ohm 20% tapplings 30/- P/P 2/-
 T.100. 5-10 amp. LOW loading, 6,000 ohm, 28/- P/P 2/-
 T.142. 7 watt stereo amp. 9,000 ohm. 20% tapplings. 26/- P/P 2/-
 T.140. 3 watt amp., type A tape amp., 2 watt stereo, 5,000 ohm. 12/- P/P 2/-
MAINS TRANSFORMERS (Primaries 240-220-200; 0-10 v. 50 o/a.)
 T.55. 5-10 amp. and tuner, 300-0-300 v., 120 mA., 6.3 v. 2.5 a., CT. 6.3 v. 2.5 a., 6.3 v. 1 a., 22/- P/P 2/6
 T.58. 5-10 amp. 300-0-300 v., 100 mA. 6.3 v. 1 a., CT. 6.3 v. 1 a., 27/- P/P 2/6
 T.101. Two 5-10 amp. Low loading, 300-0-300 v., 150 mA., 6.3 v. 4 a. CT., 6.3 v. 1 a., 34/- P/P 2/6
 T.142. 7 watt stereo, 250-0-250 v., 150 mA., 6.3 v. 4 a. CT., 6.3 v. 1 a., 33/- P/P 2/6
 T.141. 3 watt, 300-0-300 v., 60 mA. 6.3 v. 1 a., CT. 6.3 v. 1 a., 22/- P/P 2/-
 T.183. 2 watt stereo 250-0-250v. 50 mA. 6.3v. 2a. CT., 6.3v. 1a., 25/- P/P 2/6.
 All transformers fully guaranteed, all shrouded fully except T.140 and T.B.
SPECIAL OFFER. T.44 and T.55 59/- P/P 3/6. Used on "Bribond P.O."

"POWER-PAKS"

T.A. Trans. and Siemens contact cooled metal bridge rectifier delivers 270 volts D.C. 100 mA. and 6.3 v. c.T. 3a., 32/- plus 2/- P.P.
 T.B. Trans. and Siemens contact cooled metal bridge rectifier delivers 270 volts D.C. 60 mA. and 6.3 v. c.T. 2a., 25/- plus 2/- P.P.

SOUTHERN TECHNICAL SUPPLIES, 83 Station Road, Portlaine Sussex

RADIO TRADERS LTD.

23 WARDOUR ST., LONDON W.1. (Coventry Street end)

Phone No.: GERrard 3977/8 Grams "Radiotrade"

STOCKISTS OF CARR FASTENER COMPONENTS

ALL POPULAR TYPES OF



COMPONENTS SUPPLIED FROM STOCK

TRANSISTORS: A.F. 7/6 each. R.F. 15/- each.
TRANSISTOR CONDENSERS. Miniature Electrolytic Capacitors. 32 mfd. 3 v. 25 mfd. 25 v. 25 v. 25 mid. 6 v., 16 mid. 12 v. 8 mid. 6 v., 5 mfd. 12 v., 2.5 mfd. 25 v., 1.6 mfd. 6 v. 1 mfd. 12 v. All these types of condensers are 2/6 each. **SPECIAL DISCOUNTS FOR QUANTITIES**

THREE ASTOUNDING TV TUBE OFFERS

All brand new in famous makers' cartons.
 (1) 17in. rectangular aluminised 6.3 HTRS. 3A current; max. anode voltage 16 kV. Usual price £17.5.0. **OUR PRICE £9.19.6.** Crating and carr. 15/-.
 (2) Ferranti T12/44 and T12/54G 12in. magnetic white fluorescence; 4 v heater; max. anode 10 kV. As used in many TV receivers. Original price £17.5.0. Our price £4.19.6. Crating and carr. 12/6.
 (3) Ferranti 9in. Tube round white fluorescence, 5 v heater, max. anode voltage 7 kV. Our price £2.19.6. Crating and carr. 11/6.

JONES PLUGS AND SOCKETS. 4 pin 2/6 pair; 6 pin 3/6 pair; 8 pin 4/6 per pair; 12 pin 6/6 per pair. If cover required send 1/6 extra per cover.

WANDER PLUGS. Red and black doz. 2/-
PHILIPS TRIMMER TOOLS 1/- each doz. 10/6
4-WAY PUSH-BUTTON UNITS 2/6 each. Knobs for same, 3d. each.
POINTER KNOBS. Small black with white line, 7/6 per doz. Small white with black line 8/- per doz. Both types 1/4in. spindle. Large price reductions for 1,000 lots and over.

CASH WITH ORDER OR C.O.D. ALL ORDERS DEPT. W.I.
ALL ORDERS FOR LESS THAN £2 ADD POSTAGE

We invite your enquiries for items not listed.
 Trade Counter open 9 to 6 Monday to Friday
 Also 9 to 1 Saturday. Callers welcomed.

Large stocks of all types of resistors, condensers, valveholders always available ex stock. Manufacturers' enquiries welcome.

VALVES

Brand new, individually checked and guaranteed

AC/DD ... 2/6	E1148 ... 2/-	EZ80 ... 7/6	PEN25 ... 4/6	Z31 ... 6/-	6F6 ... 7/-	12SC7 ... 4/6	816 ... 30/-
AC/JHL ... 2/6	EAS0 ... 1/6	FA15 ... 4/-	PEN46 ... 5/6	1A3 ... 3/6	6F8G ... 6/6	12SG7 ... 6/6	829A ... 30/-
AC/PJ ... 2/6	EAC91 ... 4/6	FW4/500 ... 8/-	PEN65 ... 6/6	1A5GT ... 5/-	6F12 ... 4/6	12SH7 ... 4/9	833A ... £14
AC/PI ... 2/6	EB34 ... 1/6	H30 ... 5/-	PEN141 ... 4/-	1B23 ... 11/-	6G6G ... 3/-	12SJ7 ... 6/-	843 ... 7/6
AC6/PEN ... 5/-	EBC33 ... 6/-	H63 ... 3/6	PEN220A ... 3/-	1B24 ... 11/-	6H6M ... 2/-	12SK7 ... 5/-	866A ... 10/-
AC/SP3 ... 4/6	EC52 ... 3/9	HP4101 ... 6/-	PEN1340 ... 6/-	1B26 ... 11/-	6H6GT ... 1/9	12SL7 ... 7/-	872A ... 35/-
AL60 ... 6/-	EC54 ... 3/6	KBC32 ... 5/-	PENDD/	1B32 ... 10/-	6J5 ... 3/6	12SR7 ... 6/-	930 ... 8/-
AR6 ... 2/6	ECC32 ... 4/-	KF35 ... 5/-	1360 ... 9/6	1D8GT ... 6/-	6J6 ... 4/3	15D2 ... 6/-	954 ... 2/-
AR8 ... 5/6	ECC81 ... 6/6	KT31 ... 8/-	PL82 ... 8/-	1L4 ... 3/9	6K6GT ... 6/6	15E ... 8/-	956 ... 2/9
ARDD5 ... 2/-	ECC82 ... 6/9	KT33C ... 7/-	PL83 ... 9/-	1LDS ... 3/6	6K7G ... 7/2	15R ... 7/6	1619 ... 6/-
ARP3 ... 3/-	ECC83 ... 7/-	KT66 ... 8/-	PM4DX ... 3/-	1R5 ... 6/9	6K7GT ... 5/3	19E2 ... 5/-	1625 ... 6/-
ARP4 ... 3/6	ECC84 ... 7/9	KT241 ... 9/-	PT25H ... 7/6	1S5 ... 6/-	6K8G ... 6/6	28D7 ... 8/-	1626 ... 4/6
ARP12 ... 2/9	ECC91 ... 4/-	KTW63 ... 6/6	PY82 ... 8/-	IT4 ... 4/-	6L5G ... 6/-	35T ... 30/-	1629 ... 4/6
ARP21 ... 5/6	ECL80 ... 9/6	L30 ... 4/-	QP21 ... 6/3	2A3 ... 8/-	6L6 ... 10/-	35Z4GT ... 7/-	4242A ... 6/-
ARP24 ... 3/6	EF8 ... 6/-	MH4 ... 4/-	QP25 ... 5/3	2A6 ... 7/-	6L6G ... 5/6	39/44 ... 6/6	7193 ... 1/9
ARP34 ... 4/6	EF22 ... 7/3	MH40 ... 6/6	R10 ... 12/6	2C34 ... 2/6	6L34 ... 4/6	41FP ... 1/9	7475 ... 5/-
ATP4 ... 2/9	EF32 ... 5/6	MH41 ... 6/6	RG1-240A ... 17/6	2D4A ... 4/-	6N7GT ... 7/-	524G ... 8/-	8010AR ... 22/6
ATP7 ... 5/6	EF36 ... 3/6	MHL4 ... 2/6	RG3-250 ... 17/6	2X2 ... 4/-	5Q7G ... 6/3	53A ... 3/-	8020 ... 6/-
AUI ... 5/6	EF39 ... 4/6	ML4 ... 7/6	RG4-1250 ... 9/6	3A4 ... 6/6	6SA7 ... 5/8	58 ... 5/8	9001 ... 5/-
AW3 ... 4/-	EF50 ... 2/6	ML6 ... 6/-	RK34 ... 2/6	3B24 ... 3/-	6SC7G ... 5/6	59 ... 6/6	9003 ... 5/6
B30 ... 3/6	EF52 ... 3/6	MS/PEN ... 6/-	RL37 ... 2/6	3E29 ... 3/-	6SC7GT ... 6/-	71A ... 4/6	9004 ... 4/-
BL63 ... 6/-	EF54 ... 5/6	MS/PENB ... 6/-	SP4B ... 4/6	(829B) ... 60/-	6SG7 ... 5/-	77 ... 6/-	9006 ... 4/-
D41 ... 3/3	EF55 ... 6/-	MS/PEN/T ... 6/-	SP13C ... 4/6	3Q5GT ... 9/-	6SH7 ... 5/-	80 ... 6/3	Cathode Ray
D42 ... 4/-	EF70 ... 4/-	N34 ... 8/-	SP41 ... 2/6	4A1 ... 4/6	6S17 ... 6/9	82 ... 8/6	Tubes:
D77 ... 4/3	EF80 ... 6/9	NR15A ... 3/-	SP61 ... 2/6	4D1 ... 2/6	6S17G ... 6/9	83 ... 9/6	3BP1 ... 25/-
DA30 ... 12/6	EF85 ... 6/10	NR61 ... 7/-	SU2150A ... 4/9	5U4G ... 5/-	6SK7 ... 5/9	84 ... 12/6	5CP1 ... 42/6
DD41 ... 4/6	EF89 ... 8/9	NT37 ... 14/-	T41 ... 19/-	5V4 ... 7/-	6SL7GT ... 6/6	89 ... 6/-	5FP7 ... 45/-
DD620 ... 4/6	EF91 ... 4/10	(4033A) ... 14/-	Y2D33B ... 8/-	5Y3GT ... 6/9	6S07 ... 6/6	210LF ... 3/-	PG7/5 ... 15/-
DET5 ... 20/-	EF92 ... 5/6	OD3 ... 6/-	Y23 ... 8/-	5Z3 ... 8/6	6SR7 ... 6/6	210VPT ... 3/-	VCR517 ... 10/-
DET18 ... 30/-	EL32 ... 3/9	OZ4 ... 5/-	YR78 ... 4/-	5Z4G ... 8/-	6SS7 ... 6/6	217C ... 17/6	VCRX258 (with scanning coil) ... 45/-
DET19 ... 2/6	EL84 ... 8/3	OZ4A ... 5/-	YR99 ... 3/-	6A6 ... 5/-	6V6G ... 6/6	220VSG ... 3/-	
DET20 ... 2/6	EL91 ... 7/6	P61 ... 2/6	YR100 ... 3/-	6AB7 ... 4/3	6V6GT ... 6/-	350B ... 8/-	Special Valves:
DH76 ... 4/9	EY91 ... 4/6	PCC84 ... 8/-	YR150/30 ... 7/3	6AG5 ... 4/6	6X5GT ... 6/6	393A ... 25/-	2131 ... 45/-
DLS10 ... 4/6	EZ40 ... 7/-	PCC85 ... 8/-	VS110 ... 4/-	6AG7 ... 10/-	8D2 ... 2/6	446A ... 14/-	3A/1481 ... 45/-
			VT25 ... 8/6	6AK6 ... 7/6	9D2 ... 3/-	446B ... 14/-	3J/170/E ... £35
			VU111 ... 3/-	6AK7 ... 10/-	11E5 ... 5/-	705A ... 17/6	3J192/E ... £37/10
			VU120 ... 3/3	6AM5 ... 5/-	12A6 ... 5/-	715B ... 97/6	723AB ... 52/6
			VU133A ... 3/-	6AM6 ... 6/3	12AH7 ... 7/-	717A ... 8/6	726A ... 27/6
			W31 ... 7/-	6B4G ... 4/6	12AT7 ... 6/6	801 ... 6/6	ACT25 ... 40/-
			W42 ... 7/-	6B8 ... 5/6	12AU7 ... 6/9	803 ... 22/6	CGV691 ... 60/-
			Y66 ... 8/-	6B8G ... 2/6	12AX7 ... 7/-	805 ... 30/-	KR3 ... 45/-
				6C4 ... 4/-	12C8 ... 7/6	807 AMER ... 5/3	VX7110 ... 15/-
				6C5 ... 6/-	12E1 ... 22/6	807BR ... 3/9	WL417A ... 15/-
				6C6 ... 4/6	12H6 ... 2/6	813 ... 70/-	
				6C8G ... 5/-	12J5GT ... 3/6	815 ... 80/-	

AND MANY OTHERS IN STOCK

All U.K. orders below 10/- P. & P. 1/-; over 10/- 1/6; orders over £24 P. & P. free. C.O.D. 2/- extra. Overseas postage extra at cost.

BRAND NEW ORIGINAL SPARE PARTS FOR AR88 RECEIVERS.

TUNING MECHANISM. (Gear) £2/10/- post free.

Please write your other requirements.

Complete set of strong aerial rods (American). Screw-in type MP49, 50, 51, 52, 53, total length 15ft. 10in., top diameter 0.615in., bottom diameter 0.185in., together with matched aerial base. MP37 with ceramic insulator, ideal for car or roof insulation, £2/10/-, post free.

TRANSCIEVERS 68T 3.5 mc/s. together with aerial rods, microphones, H.R. headphones. Key in full working order £6/15/- P. & P. 5/-.

FAMOUS U.S.A. FIELD TELEPHONES in canvas or leather case, type EE8 £9 per pair post free.

I.F. TRANSFORMERS. 4.5 Mc/s. American made in black crackle finish housing, 6/- P. & P. 1/-.

HRO MAINS power pack, input 115/250 v. A.C. Output 250 v. 75 mA. and 6.3 v. 3.5 amps. £3, inc. carr.

VARIOMETERS for W/S No. 19. Fully tested and working 12/6. P. & P. 2/6.

BLOCK CONDENSERS. 0.1 mfd. 12,000 v. D.C. test 12/-, 0.0044 mfd. 20,000 v. D.C. test 8/-, 0.5 mfd. 8,000 v. D.C. test 8/-, 7.5 mfd. 400 v. D.C. test 3/-.

ELECTROLYTIC CAN TYPE. 250 mfd., 12 v. D.C. VKG 2/6. 150 mfd., 25 v. D.C. VKG 2/6. 8+8 mfd. (Block), 450 v. D.C. VKG 3/6.

FILAMENT TRANSFORMERS. Primary 0-190-210-230-250 v., 50 c/s. Sec. 1. 2.5 v. CT at 10 amps. 2. 2.5 v. CT at 10 amps. 3. 10.5 v. CT at 11 amps. 4,000 v. insulation. Price £2/19/- P. & P. 5/-. Primary 0-190-210-230-250 v. 50 c/s. Sec. 1. 10 v. CT at 4.5 amps. 2. 10 v. CT at 4.5 amps. 4,000 v. insulation. £1/16/- P. & P. 5/-. Primary 230 v. 50/60 c/s. 67 v/amps. Sec. 1. 6.3 v. 1-6 amps. 2. 6.3 v. CT 3 amps. 3. 6.3 v. CT 3 amps. 4. 6.3 v. CT 3 amps. £1/12/- P. & P. 5/-.

DRIVER TRANSFORMERS. Primary 500 ohms imp. Sec. to match two 805 in push-pull £17/6. P. & P. 5/-.

TRANSFORMERS. Relay supply. Primary 230 v. Sec. 0-27/29/31 v. at 0.5 amps., 15/- P. & P. 5/-.

COMPLETE V.F.O. UNIT from TX53. Freq. range in 4 switched bands from 1.2-17.5 mc/s. Two V.T. 501s. as oscillator and buffer, 807 as driver, two 5130s as voltage stabilizers. Output sufficient to drive two 813s in parallel. Slow motion drive directly calibrated in mc/s. Provision for crystal control, metering of buffer and driver stage. Power requirements 400 v and 6.3 v. D.C. Can also be used as low power transmitter. In excellent condition with valves and circuit diagram. £5. P. & P. 15/-.

TELESCOPIC AERIAL MASTS. 7 sections, total 11 yards. Immediate erection. £4/10/- each or £8 per pair. Post free.

LIGHT HEADGEAR ASSEMBLY. Ideal for mobile use. Headphone 600 ohms carbon microphone. 18/- P. & P. 3/-.

AR88D and I.F. Receivers, completely overhauled and tuned, £60 and £57/10/- respectively. Completely rebuilt with P.V.C. wiring, £85.

Modulation Transformers (U.S.A. Collins), primary imp. 6,000 ohms. C.T., secondary 6,000 ohms, 20 W, 9/6 each, post free.

Microphone Transformers. Balance input 30 or 250 ohms. U.S.A. manufacture. 7/6 P. & P. 1/6.

Signal Generator Type TS.14/AP. 3,200-3,370 Mc/s. Fully guaranteed £85.

Low Resistance Headphones, brand new, type CLR. 5/-; Balanced Armature 7/6. P. & P. 1/-.

813 Ceramic Valveholders 3/- each P & P. 1/6.

Mains Power Supply Unit for No. 19 wireless set. Made by RCA of Canada. 115 v. A.C. Brand new, £15. P. & P. £1.

Vacuum Condenser. 32,000 v. 50 pF., 15/- Post free.

R109 Receiver. Covering 7-8 Mc/s. 5 v D.C. New and tested £4/5/- Carriage paid.

R109A Receiver Covering 2-12 Mc/s.-6 v. D.C. New and tested £5/5/- Carriage paid.

SCR.522 RECEIVERS (BC624), 100-156 Mc/s., including all valves, 25/- P. & P. 5/-.

VIBRATOR UNIT. 12 v./180 v. 60 mAmps. Exceedingly well filtered and smoothed, excellent for car radios. New. Including one OZ4 valve and vibrator. 12/6. P. & P. 5/-

No. 62 TRANSMITTER-RECEIVER. 1.6-12 Mc/s. in two ranges, ideal for mobile use. Total 11 valves. Rx-A super with separate mixer and local oscillator Tx uses QV04-7 as power amplifier VFO or switched selected crystals. CW, phone (grid modulation) metered for operation and valve testing. Pi output to match rod aerials or long wire "Press to send" operation from mike. Size 8 1/2 in. x 17 1/2 in. x 13 1/2 in., weighs only 29 lbs. Completely self contained with internal power unit for 12 v. operation. Power consumption 4.4 amps. on send, 3.4 amps on receive. As new condition, tested, complete with operation instructions. Price £17/10/-. Delivery included.

CARBON INSET MICROPHONE. G.P.O. type 2/6. P. & P. 1/-.

P. C. RADIO LTD.
170, GOLDHAWK RD.,
W.12 SHEpherds Bush 4946

PERSONAL CALLERS WELCOME



EARN what you're really worth!

You've got ability—everyone has. But are you making the most use of it—to earn what you're really worth? If not, let ICS training develop your ability and help you to a better job, with more security!

START TODAY! Fees are moderate and there are no books to buy.

TAKE THE RIGHT COURSE NOW . . .

Advertising and Salesmanship Exams: John Inter., A.A. and I.P.A. Finals, I.S.M.A., U.C.T.A.	Farming and Horticulture. Pig and Poultry Keeping. Flower and Vegetable Growing. Smallholding. Exam: R.H.S. General.	Motor Engineering. Motor Mechanics. Running and Maintenance. Photography. The Amateur Photographer Exam: P.D.A.
Architecture and Building Exams: E.I.B.A., E.I.O.S., I.Q.S., L.L.O.B., Inst. Clk. of Wks.	Fire Engineering. Exams: I.F.E., Fire Service Promotion.	Radio, T.V. and Electrical Radio Engineering. Radio Servicing. T.V. Servicing and Eng. Practical Radio (with kit). Electricians.
Art Commercial Illustrating. Oils and Water-Colours. Commercial Training Office Training.	General Education. Good English. Exams: G.C.E. Subjects.	Exam: P.D.A. Radio, T.V. and Electrical Radio Engineering. Radio Servicing. T.V. Servicing and Eng. Practical Radio (with kit). Electricians.
Secretaryship. Exams: I.G.W.A., O.I.S., C.C.E., A.C.C.S., Inst. Bk-keepers.	Management Work Study. Exams: B.I.M. Inter, Final and Cert. in Foremanship.	Exams: B.I.E.E., Soc. of Engrs. C. & G. Certs. for Telecom. Technicians. Radio Amateurs. Radio Servicing (RTEB), Elec. Engrg. Practice, Electrical Installations, P.M.G. Radio Amateurs.
Civil Engineering. Exams: I.C.E., I.Struct.E.	Mechanical Engineering. Workshop Practice, Diesels, Refrig., & Welding, Eng. Maths, Prodn. Eng'g.	Writing for Profit. Short Story Writing. Journalism. And Many Other Courses.
Draughtsmanship (Slate Branch). Electronic Engineering. Electronic Equipment.	Exams: I.Mech.E., Soc. of Engrs., Cert. in Foremanship, C. & G. Cert. Mch. Shop Enz.	

. . . AND FILL IN THIS COUPON

Examination Students are Coached Until Successful

INTERNATIONAL CORRESPONDENCE SCHOOLS, Intertext House.
(Dept. 222Q), Parkgate Rd., London, S.W.11.

Please send FREE book on.....

Name Age

Address

Occupation..... 10.59

WORLD'S MOST VERSATILE COMPUTER FOR SALE

Owing to reorganisation of Government Department, we can offer for sale the world renowned Ferranti, Manchester Mark I Star Electronic Digital Universal Computer.

Brief technical data as follows:—

- Magnetic Drum Store with a capacity of 16,384 40-bit Nos. or combinations thereof.
- Cathode Ray Store 768 20-bit Nos. or combinations thereof.
- Full complement of Tape editing equipment for Input and Output, using Standard punched paper tape.
- Complete set Circuit and Logical Diagrams and all instructional data.
- Exceptional comprehensive range. Spare Valves and Ancillary Equipment included.
- History: Purchased six years ago by M.O.S. from Messrs. Ferranti. Plant is in excellent condition and has had regular servicing.

COST £100,000 (approx.). Now on offer at an extremely attractive price of £5,000

Further technical data on request:—

MESSRS. DAVIDSONS ENGINEERS (M/cr) LIMITED
Irkdale Street, Smedley Road, Cheetham Hill, Manchester, 8.
Telephone COL 1610.

VALVE BASES (STEMS) IN LEAD AND HARD GLASS VALVE SLEEVES QUARTZ CRYSTAL CONTAINERS


WE SPECIALISE IN SHORT RUNS TO CUSTOMERS' SPECIFICATIONS. WE INVITE YOUR ENQUIRIES, ALSO FOR OTHER GLASS PARTS FOR THE ELECTRONICS INDUSTRY.

DAY-IMPEX LIMITED
PROGRESS WORKS, BRUNEL ROAD
EASTWOOD INDUSTRIAL ESTATE
SOUTHEND-ON-SEA, ESSEX

Telephone: EASTWOOD 525296/7

new and enlarged edition

Radio Circuits

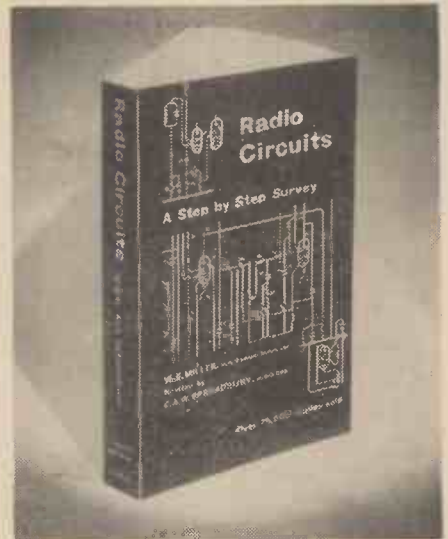

by *W. E. Miller, M.A. (Cantab.) M.Brit.I.R.E.*, revised by *E. A. W. Spreadbury, M.Brit.I.R.E.*

This established introduction to superheterodyne receiver circuits contains over 80 easy-to-follow circuit diagrams, splitting up the circuit into sections and working from the aerial terminal through to the loudspeaker.

15s net by post 15s10d from leading booksellers

Iliffe & Sons Ltd., Dorset House, Stamford Street, London, S.E.1

ESTIMATOR

required for a Unit of The Plessey Company Limited producing complex electronic, electro-mechanical and mechanical Equipments.

Applicants must be thoroughly experienced in electronic and light mechanical engineering and be capable of estimating prices of pieceparts and assembly and wiring times on a batch production basis. Some experience as a Methods Engineer is also desirable.

The position is permanent and there are excellent opportunities for further promotion within the Organisation with progressive salary scales and a Pension Scheme.

British Subjects should write, giving concise details of age, education, experience, present position and salary to: The Personnel Officer, Cheney Manor, Swindon, Wilts.

STABILIZE YOUR AC MAINS with the finest equipment, at a fraction of the normal cost:— FERRANTI 7½-KVA MOVING COIL AUTOMATIC VOLTAGE REGULATORS

Any stabilized output voltage in the range 200-250 v. can be selected by plug-board tappings. The selected output voltage is automatically maintained constant within $\pm 1\%$, at all loads 0 to 30/37½ amps., when the supply voltage is varying over the range +8% to -12%.

- Frequency compensated 45-55 and 54-66 c/s.
- Excellent output wave-form.
- Can also be used as a variable transformer.
- Unused. Complete with spares and instruction book.

P. B. CRAWSHAY
94 Pixmore Way, Letchworth, Herts. 'Phone 1851

DEPENDABLE RADIO SUPPLIES LTD.

12a TOTTENHAM STREET, LONDON, W.1. (2 minutes Gooch Street Station, Opp. Heals in Tottenham Court Road)

Phone: LANgham 7391/2. Hours of Business 9-6. Callers welcome. Terms: Cash with order or C.O.D.



POST OFFICE RELAYS

TYPE 3,000

BUILT UP TO YOUR REQUIREMENTS

COMPONENT PARTS ALL PLATED

Yokes, 3/- each
 Armatures, 9d. each
 Adjustable, 1/3 each
 Spindles, 1/- each
 Top Plates, 3d. each
 Bottom Plates, 3d. each
 Armatures Screws adjustable, 4d. each
 Fixing Screws, (with insulator), 2d. each
 Buffer Blocks 6d. each

BUILD UPS CONTACTS

1. C/O 1/3
 2. C/O 2/6
 3. C/O 3/6
 4. C/O 4/6
 6. C/O 6/6
 8. C/O 8/6
 Other build ups to order all types of relays built to your specification.

COIL VALUES

Up to	100 Ohms	Single	Twin
500	3/-	4/-	5/-
1,000	4/-	5/-	7/-
5,000	6/6	8/6	14/6
10,000	9/-	14/6	17/6
20,000	14/-	16/-	20/-
40,000	16/-	20/-	—
80,000	20/-	—	—

*Slugged coils extra.

Type 600 also available

SIEMEN'S HIGH SPEED C/O RELAYS

250+250 ohm Twin Coils 6/6
 850+850 " " " 8/6
 1,000+1,000 Ohm Twin Coils 10/6
 1,700+1,700 " " " 17/6
 Postage and packing 1/6 on all items.

MINIATURE SEALED RELAYS

Many values in stock. Send for detailed list. S.T.C. 4184 G.D. 700 Ω 2 c/o, 17/6. Plus 1/6 P. & P.

No. 19. SUPPLY UNITS

No. 1 Mark III. Ref. ZA. 15208.

Input: 12 volts.
 Output Dual: 250 volts at 125 mA.
 490 volts at 65 mA.
 Non Tropicalised.

No. 2 Ref. ZA. 10572.

Input: 12 volts or switched to 24 volts.
 Output Dual: 265 volts at 120 mA.
 500 volts at 26 mA.
 Also 12 volt vibro Pack Rectified OZ4 Valve.

Mallory Type G634C Vibrator.

All these units are smoothed

Type ZA 3018.

No. 19. Mark II.

Input: 12 volts.

Output Dual: 275 volts at 110 mA.

500 volts at 50 mA.

All these units are smoothed and lused on both H.T. supplies.

All at 57/6. Plus 7/6 carriage.



DEPENDABLE 4-5 WATT TRANSISTOR AMPLIFIER

Can be supplied for 6 or 12 volt operation

Standard Model input supplied for low impedance microphone or high impedance pickup.

Transistor Line-up. Power Transistor output V3030P. OC 72. OC 75. Current consumption. Standing current 220 M/A. consumption. On full volume 350-400 M/A. consumption.

Controls. Volume control and tone control with on/off switch.

Output socket. Tapped at 3 ohms., 7½ ohms., 15 ohms.

Physical Size. Depth 6in., Width 5in., Height 2½in. Case made in mild steel finished in two tone enamel.

The above unit can also be fitted with two independent inputs and volume control. Can also be supplied with separate A.C. Power Pack at extra cost.

The price for Standard Models—£18/5/-, including one 7½ ohm Horn Type Speaker. The price is subject to discount for Trade Enquiries.

MADE IN U.R.A.

DYNAMOTOR ROTARY TRANSFORMER

NEW & BOXED

D.C. input 27 v. Output 285 v. at 75 mA. 37/6.
 D.C. input 12 v. Output 250 v. at 50 mA. 47/6.
 Postage & Packing on each 3/6

UNREPEATABLE OFFER LESS THAN HALF MANUFACTURER'S COST



Brand new single phase motors suitable for tape recorders, radiograms, work-shops, etc., etc. Has many uses. Reversible, 200-230 v., 5in. oz. torque. 1,400 r.p.m. Capacitor start. Weight 4½lb. Length overall 5in.

spindle both ends. 4in. x ½in. ½ x ½in. Price, incl. P. & P. and capacitor, 55/-.

BLOWER MOTOR

Operation figures:
 27v. at 7,000 r.p.m.
 12v. at 2,800 r.p.m.
 6v. at 380 r.p.m.
 17/6

Complete with blower 22/6.
 P. & P. 2/6.



LOUDHAILER SPEAKER UNIT

Impedance 7½ Ω. 6-8 watts output. Weight 10lb. Size: depth 7½in., diam. 10in. Easy fixing. Weatherproof spun solid steel. Hammered finish.

PRICE 57/6

Carriage & Packing 7/6.

IDEAL FOR SPORTS EVENTS, ELECTIONEERING AND SOCIAL FUNCTIONS.



TANNOY

Ex Govt. RE-ENTRANT SPEAKERS

Impedance 7½ Ω
 Handling cap. 8 watts. At a special price of 15/- Post 3/6.



Complete Portable Vehicle Loud Hailer operates on 12 v. or 24 v. supply, output 4 watts. Can be fixed easily.

Comprising Power Pack, Loud Hailer, Hand Powered Microphone. Weatherproof. Very heavy metal case.

PRICE EACH £7/10/-
 Carr. & Packing 10/-.



HEADPHONES

D.L.R.2 and D.L.R.5. BRAND NEW. Low resistance. Balanced armatures. 6/6 pair, P. & P. 1/6.

Single earpieces 3/6

NO. 3A & NO. 4A HAND MICROPHONES. Complete with plugs. BRAND NEW. 3/6 each. P. & P. 1/6.

ROTARY TRANSFORMERS

Delivery ex stock. Quotations on application.



H.T. 31.
 Input 11.5 v.
 Output 250 v. at 125 mA.

H.T. 32
 Input 11.5 v.
 Output 490 v. at 65 mA.

AS SUPPLIED TO GOVT. DEPTS. AND LEADING MANUFACTURERS
 NEW & BOXED

ROTARY TRANSFORMERS

Made by DELCO



TYPE 1
 27/6
 P. & P. 3/6

TYPE 2
 37/6
 P. & P. 3/6

Type 1. Dual voltage 12 or 24 v. input 265 v., 120 mA. output; 500 v., 26 mA. output
 Type 2. 12 v. input, 275 v., 110 mA. output; 500 v., 50 mA. output.

Both types dual outputs.

HEAVY DUTY SLIDING RESISTORS

Supplied in two types
 250 watts to carry 25 amps. Resistance 0.4 ohms, worm drive, also 125 watts, 12 amps. Resistance 1 ohm. slider. Suitable for charging board, etc. Size 9 x 4 x 6in. high. Brand new. Boxed. Price 12/6. Post 3/-.

ULTRA SHORT WAVE TRANSMITTER

TYPE 7 A.D. BRAND NEW. Complete with push-pull valves, etc., etc. To clear, 20/- Plus P. & P. 5/-.



RESEARCH LABORATORY



THE SOLID STATE PHYSICS SECTION has a vacancy for the position of Assistant for the preparation and examination of semi-conducting materials as part of a programme of basic research. The position is responsible and progressive.

The successful applicant should have a good basic knowledge and practical experience, and will be encouraged to initiate and develop experimental methods.

Salary will be dependent on experience and qualifications. Facilities for further study available.

The Laboratory serves a large group of Companies and is situated in pleasant rural surroundings near Reading with fast train service to London.

5-day Week.

Pension Scheme.

Apply in writing, quoting reference No. SS/A/14, to the

Personnel Officer,

Research Laboratory,
**ASSOCIATED ELECTRICAL
INDUSTRIES LIMITED,**

Aldermaston Court,
Aldermaston, Berkshire.

THE AUSTIN MOTOR COMPANY LIMITED, LONGBRIDGE, BIRMINGHAM.

Vacancies still exist for ELECTRICAL AND/OR ELECTRONIC ENGINEERS for training in the operation and maintenance of ELECTRONIC DATA PROCESSING EQUIPMENT and its ancillary equipment.

Men aged 22 to 28 are invited to apply for these positions provided they have attained the Higher National Certificate in Electrical Engineering or its equivalent. Men with knowledge and experience with Punched Card Machinery and in other branches of industrial electronics and its applications would have preference.

Selected engineers will receive three months' intensive training and, if satisfactory, will receive an immediate increase in salary. These positions are permanent and engineers filling them have first-class opportunities for promotion and advancement.

The company offers a five-day week and membership of its Pension and Life Assurance Scheme.

Applications, stating age, qualifications and previous experience to:—

PERSONNEL MANAGER

CAREERS IN AUTOMATION

IF —

- You are a **SENIOR ELECTRONIC ENGINEER, MECHANICAL ENGINEER or PHYSICIST** with an honours degree or the equivalent and several years' responsible design experience.
- You seek a challenging and progressive post concerned with the development of industrial automatic control equipment.
- You prefer to join a prosperous and rapidly expanding Company with world-wide markets.
- You can offer initiative, originality of thought and marked design ability in return for a substantial salary, security and sound prospects.
- Preferably but not necessarily, you have experience in the fields of pulse and digital techniques, servo systems, transistor techniques, mechanical paper handling or the design of light mechanisms.
- Alternatively you seek a somewhat less senior development post or that of **INSTALLATION or TEST ENGINEER.**

— then apply in confidence, quoting full details of qualifications and past record to Box No. 5145 c/o "Wireless World."

TECHNICAL AUTHORS AND TECHNICAL ILLUSTRATORS

Marconi's Wireless Telegraph Company Limited, Chelmsford, an acknowledged leader in the electronics field, is expanding the centralised technical publications teams which prepare handbooks for a wide field of civilian and service equipment.

A number of interesting appointments are available, particularly for experienced writers with good technical backgrounds. Vacancies also exist for a few good illustrators.

These posts carry real opportunities for promotion and long term career prospects are excellent.

In order to meet our future needs we are also prepared to engage a few junior writers with a good technical background to whom training will be given.

Please apply, giving full details of experience and quoting reference WW2036E, to Mr. J. L. Scott, Dept. C.P.S., Marconi House, 336/7 Strand, London, W.C.2.

Pye Telecommunications Ltd.

of
Cambridge

V.H.F. ENGINEERS

required

to join an expanding organisation in the forefront of Research and Development.

Experience in design and development of Tx, Rx, and Transistor circuitry is essential, particularly in Mobile applications.

Successful candidates will be based on Cambridge, which combines the amenities of a flourishing University City with easy access to the pleasant surrounding countryside.

London is within easy reach (70 minutes by train), but the strain and expense of daily "rush-hour" travel is removed.

Please apply in writing giving details of age, experience, and salary required, to:

The Personnel Manager,
PYE TELECOMMUNICATIONS LTD.,
Ditton Works, Newmarket Road, Cambridge.

OPPORTUNITY

for a

SENIOR ELECTRONIC ENGINEER

in the activities of our

NEW SYSTEMS ENGINEERING GROUP


This new Group, established as a separate facility at Hatfield, has as its objective the analysis of problems, and the design of systems that promote the **ADVANCEMENT OF AUTOMATION** in all Branches of Industry.

This **SENIOR ELECTRONIC ENGINEER** will be responsible for leading a team of Electronic Engineers engaged on the development of electronic techniques for automation and process control for all branches of industry. Digital techniques and the application of transistors will play a major part in these developments.

We will be pleased to hear from men, who, given the opportunity, consider that they could make a real contribution to the success of this enterprise. Replies, which will be treated in confidence, should be addressed to:

MR. T. R. LAMB (REF. 531)

DE HAVILLAND PROPELLERS LIMITED, HATFIELD, HERTS.

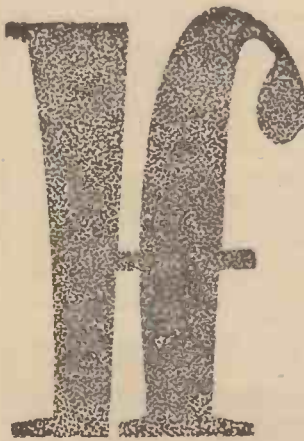

you are
a qualified
**ELECTRONIC
ENGINEER**

with several years' experience of
**TRANSISTOR
CIRCUITRY.**
Why not discuss your career in confidence with



who can offer exceptional opportunities in the field of electronics related to physical measurements, electro-mechanical and servo mechanisms, and digital data handling. Salary up to £1,500.

Please write to **ERIC BULL, Personnel Officer**
THE SOLARTRON ELECTRONIC GROUP LTD.
FARNBOROUGH, HANTS.

MARCONI INSTRUMENTS LTD.,

TECHNICAL PERSONNEL REQUIRED

SENIOR AND JUNIOR ELECTRICAL DESIGN ENGINEERS
SENIOR AND JUNIOR MECHANICAL DESIGN ENGINEERS

DUTIES:

To undertake the design of Test Equipment covering practically the whole electronic field, including Telecommunication, Guided Weapons and Nucleonics. Considerable personal responsibility and freedom is given, and there are no set rules regarding the number of people engaged on a project, the allocation of project leaders, etc.

QUALIFICATIONS:

The ability to design equipment and aggressively progress a project through to the stage where a model is made and the information is available for a production drawing office. Senior engineers are usually of B.Sc. standard with practical experience in measuring techniques, while Junior engineers are often Graduate Members of one of the Professional Institutions, or have similar qualifications, but this is in no way mandatory. The ability to progress the project through to a satisfactory conclusion is the prime requirement. Due to expanding activities, men with drive and initiative can be sure of progressive advancement.

Comprehensive pension and assurance schemes are in operation, and Canteen and Social Club facilities are provided.

Call any day including Saturday mornings at,
MARCONI INSTRUMENTS LTD.,
LONGACRES, HATFIELD ROAD,
ST. ALBANS, HERTS.

or write giving full details to Dept. C.P.S., Marconi House, 336/7 Strand, London, W.C.2, quoting reference WW2970B

THE M.O. VALVE COMPANY LTD.

(a subsidiary of the G.E.C. Ltd.)
requires a

SENIOR APPLICATIONS ENGINEER

for its Cathode Ray Tube Division.

Applicants should be graduates or have equivalent professional qualifications, and some years experience in the electronics field, preference being given to experienced circuit engineers.

Good commencing salary and prospects

Apply to Personnel Manager (C.R.T/A),
M.O. Valve Co. Ltd.,
Brook Green, Hammersmith, W.6.



INDUSTRIAL TELEVISION

A development engineer is required in Cambridge to work on specialised closed-circuit television equipment.

Applicants should preferably have qualifications to HNC standard, possess a knowledge of television techniques and be capable of original thought; some previous T/V camera experience is desirable though not essential. The successful applicant will join a team engaged in all aspects of the new and rapidly expanding field of industrial T/V equipment and will eventually be expected to see new equipment through from original design to installation.

Applications should be addressed to the Chief Engineer, Pye Limited, Cambridge, quoting "T.V.D."

TEST ROOM PERSONNEL REQUIRED

Duties: Testing and calibrating of a wide range of telecommunications and industrial electronic instruments.

Qualifications: We shall be pleased to receive applications from any men with, or, without academic qualifications, who are able to demonstrate suitable experience and training.

HOLIDAY ARRANGEMENTS CAN BE MAINTAINED
Apply any day, including Saturday mornings.

MARCONI INSTRUMENTS LIMITED,
LONGAORES, HATFIELD ROAD,
ST. ALBANS, HERTS.

CENTRAL ELECTRICITY GENERATING BOARD SOUTH WESTERN DIVISION

Instrument Mechanics and a Chargehand Instrument Mechanic required at Berkeley Nuclear Power Station.

Training in Nuclear Power Station instrumentation will be given to the successful applicants.

General conditions of employment will be in accordance with the N.J.L.C. Agreement for the Electricity Supply Industry; 5 day, 44 hour week; provisional wage rate 4/10½d. per hour plus an additional 4d. per hour payment to the Chargehand; voluntary Superannuation Scheme.

Housing accommodation can be made available if required.

Applicants should have received training in electronics and instrumentation and have had practical experience of maintenance and calibration of modern industrial instruments or electronic equipment.

Applications must be made in writing, include full details of age, training, experience and present employment, and sent to:

STATION SUPERINTENDENT, Berkeley Nuclear Power Station, Berkeley, Gloucestershire, by 26 October, 1959.

MIDDLESEX COUNTY COUNCIL Education Committee

TWICKENHAM TECHNICAL COLLEGE Egerton Road, Twickenham, Middlesex

Required, as soon as possible, LECTURER to teach ELECTRONICS in Higher National Certificate and Diploma Courses. The College offers courses in Automatic Control techniques and hence applicants should have had experience in fundamental circuit design and servo systems.

A degree or equivalent qualification is desirable.

Salary in accordance with the Burnham (Technical) Report.

Application form and further particulars from the Principal; closing date 31st October, 1959.

C. E. GURR, M.Sc., Ph.D.,
Secretary to the Education Committee.

ELECTRONICS RESEARCH LABORATORY STAFF

Senior qualified Electronics Engineers of Degree or Higher National Certificate standard are required for interesting work in connection with a number of projects in the field of Electronics, including the application of transistors to television and similar equipment. Applicants must have suitable academic qualifications and experience in laboratory procedure. They will normally be expected to be able to handle a project from its inception to its final conclusion. Box No. 1952, c/o "Wireless World."

NORTHAMPTON

College of Advanced Technology LONDON St. John Street, E.O.1

Grade III Laboratory Technicians required in Electrical Engineering Department. In addition to holidays with pay totalling up to five weeks per year, part-time day release is granted for approved studies to employees under 21. Standard L.C.C. conditions; salary scale from £315 at age 18 to £691 10s. p.a. according to age and qualification.

Letters of application to Head of Electrical Engineering Department.

MARCONI INSTRUMENTS, ST. ALBANS

require

TECHNICAL WRITERS

This Company has immediate vacancies in its Technical Literature (Telecommunications) Section. Applicants should have electrical engineering qualifications and/or experience in the design or development of electronic equipment. The duties are varied and interesting and the posts provide permanent and pensionable positions in a well-established Company.

Please write giving full details of experience and qualifications to Dept. C.P.S., Marconi House, 336/7 Strand, W.C.2, quoting reference WW 2970H.

RADIO COMMUNICATIONS

MARCONI'S offer a number of appointments in connection with the installation of modern radio systems. The majority of the appointments are OVERSEAS and vary in duration from three to twelve months and occasionally more.

The appointments are to the permanent staff of the Company and offer excellent career experience to first-class radio engineers and technicians.

Applications which will be treated as confidential should be addressed to Mr. J. L. Scott, Dept. C.P.S., Marconi House, 336/7 Strand, London, W.C.2, quoting reference WW 2044B.

DE HAVILLAND PROPELLERS LIMITED

have a young team of engineers working on the design and development of Engine Control Systems, Temperature Control, Servo mechanisms, and Flight Systems.

They seek a small number of

SENIOR ELECTRICAL ENGINEERS

who will lead groups carrying out basic circuit and development work on these systems. Experience on magnetic amplifiers, transistor circuitry or servo-mechanisms is essential, and applicants should have a degree in Electrical Engineering or Physics, or H.N.C. (Elect.).

They also require a number of

JUNIOR ELECTRICAL ENGINEERS

who will join the groups described above. O.N.C. (Elect.), City and Guilds Telecommunications certificate, or equivalent qualifications are necessary.



Please write to:-

The Personnel Manager (Ref. 562),

DE HAVILLAND PROPELLERS LIMITED
HATFIELD, HERTS.

MICROWAVE ENGINEERS and PHYSICISTS

Due to the continued expansion of our Microwave Group, we now have openings for

MICROWAVE ENGINEERS

for the development, and introduction to production, of new microwave devices.

This work will entail close collaboration with the G.E.C. Research Laboratories at Wembley.

The positions, after initial specialised training, offer graduates, or similarly qualified engineers, excellent opportunities to join a team specialising in advanced microwave techniques. Ref. ME/1.

We also have a few junior vacancies for

TECHNICIANS

with Inter B.Sc. or O.N.C. (Elec) to work in the same field in a supporting capacity. They will be given every opportunity to gain experience, and to advance to senior positions as they become qualified. Ref. MT/2.

Candidates are invited to write, quoting the appropriate reference, to

Personnel Officer,

THE M-O VALVE CO. LTD.

Brook Green, Hammersmith, W.6.

(A subsidiary of the G.E.C. Ltd.)

P Y E

Telecommunications of Cambridge

Research Department

require

2 DEVELOPMENT ENGINEERS

with experience of Domestic Receiver Design with particular reference to Car Radio. Applicants must have had some laboratory experience and possess O.N.C. or equivalent technical qualifications. Preference will be shown to those who have had some experience of work on transistors.

The Company is in the forefront of Research and Development and offers excellent progressive opportunities for men of the right calibre.

Residence in Cambridge combines the amenities of a flourishing University City (good shopping, ample recreational facilities, etc.) with easy access to the pleasant surrounding countryside.

Apply in writing giving details of age, experience and salary required to:—

The Personnel Manager,
PYE TELECOMMUNICATIONS LTD.,
Ditton Works, Newmarket Road, Cambridge

THE INDEPENDENT TELEVISION AUTHORITY has vacancies for **ENGINEERS** for the operation and maintenance of television transmitters and ancillary equipment. The Authority is in a position to offer appointments with opportunities to suitably qualified young men who have either some experience in this field or who have had a good basic training in radio, radar or television. There would be opportunities for further training and all appointments are pensionable after the initial period of probation has been satisfactorily completed. Service with the Authority may involve transfers to various locations in the British Isles, but preference for a particular area will always be considered. Appointments will be made in the grades of Shift Engineer and Technical Assistant. The starting salary would be determined, to a certain extent, by qualifications and experience. Applications giving details of age, academic qualifications and experience, quoting Ref. No. E/11 should be addressed to the Personnel Officer, 62 Brompton Road, London, S.W.3.

STERN RADIO LIMITED
109 & 115, FLEET ST., E.C.4
have vacancies for
TWO RADIO ENGINEERS

Applicants must be experienced and possess sound technical knowledge. Good wages are offered plus Bonus and Staff Pension Scheme. Half-day on Saturday.

Phone **FLEET STREET 5812**
or call at 109, Fleet Street
(at Ludgate Circus, close to
Blackfriars Station).


PHILIPS ELECTRICAL LIMITED
SERVICE DEPARTMENT
WADDON FACTORY ESTATE
CROYDON, SURREY
DEPUTY CHIEF ENGINEER

required for the Service Department. This is a Managerial post and will carry a commensurate salary. Minimum qualifications required are N.N.C. (Elec.) but A.M.I.E.E. desirable. Preferred age group approx. 35 to 45 years. Applicants must have had considerable experience in the Radio, Television and allied fields, preferably in connection with servicing. **THE POST OF CHIEF ENGINEER** will become vacant in about 2 years time and it is hoped that the successful candidate for the present vacancy will prove suitable for promotion in due course.

Applications, in writing, giving full details of experience, etc., to:—
J. MUNRO-HALL,
PERSONNEL OFFICER,
PHILIPS ELECTRICAL LIMITED,
SERVICE DEPARTMENT,
WADDON FACTORY ESTATE,
CROYDON, SURREY.

**The Makers of
Britain's leading
Radio and TV Sets
use A A Benders**

Why don't you ?



This UNIQUE BENDER
Quickly and Accurately Forms
Angles, Channels, Sections, Boxes, Lids,
Trays, Chassis Brackets, Clamps, Clips,
Shrouds, etc.

Something quite NEW!
Type RO-20

For private research workers and small units. This is similar in general design and finish to the RX-20 shown above, but is lighter and less expensive.



For 6 page Folder write to:—

A. A. TOOLS (w)
197a Whiteacre Rd., Ashton-u-Lyne

ENGINEERS
FOIL STRAIN GAUGE DESIGN,
DEVELOPMENT, and APPLICATIONS.

**A Suitably
QUALIFIED ENGINEER**

is required for the above work in an expanding division of the company's activities. Applicants, who should be of degree standard in the appropriate subjects should have some knowledge of electrical resistance strain measurement, and be capable of working on their own initiative. Experience in the electrical transducer field would be an advantage.

Please apply to the Personnel Officer,
SAUNDERS-ROE LIMITED,
East Cowes, I.W.
giving brief details of qualifications, experience, age, etc.

**RADIO TECHNICIANS
IN
CIVIL AVIATION**

Men aged 19 or over for interesting work providing and maintaining aeronautical telecommunications and electronic navigational aids at aerodromes and radio stations in the U.K. Fundamental knowledge of radio or radar with some practical experience essential; training provided on special types of equipment. Salary according to age and station, approx. £670 at age 25 rising to £795. Prospects of permanent pensionable posts. Good opportunities for those who obtain O.N.C. in Electr. Eng. and certain C and G. Certificates for promotion to posts with maximum salaries of £875, £1,035 and £1,260. Apply to the Ministry of Transport and Civil Aviation (ESBI/RT), Berkeley Square House, London, W.1 or to any Employment Exchange (quoting Order No. Westminster 3552).



**INSTALLATION AND
MAINTENANCE
ENGINEERS**

There are vacancies in the Hayes Laboratories of E.M.I. Electronics Ltd., for experienced Engineers to work on the maintenance and repair of high-grade electronic test equipment. Applicants must have initiative and be capable of working with minimum supervision. This post carries a good commencing salary and excellent prospects of promotion. Please apply in writing offering full details of training and experience, and quoting Ref. EL/30/2, to:

Personnel Manager
E.M.I. ELECTRONICS LTD.
HAYES, MIDDLESEX



**ELECTRICAL
MEASURING
INSTRUMENTS
REPAIRED**

1. Considerable reduction in your overheads!
2. Prompt Quotations and Service!
3. Urgent orders given priority attention!
4. Guarantee of satisfaction!

We specialise in the repair of all types and makes of Voltmeters, Ammeters, Microammeters, Multirange Test Meters, Electrical Thermometers, etc.

As contractors to the Ministry of Supply, General Post Office and other Government Departments, we are the leading Electrical Instrument Repairers in the industry. No enquiry is too big or too small. For prompt estimate and speedy delivery send defective instrument by registered post, or writote Dept. W.W.

L. GLASER & CO., LTD.,
98-100 Aldersgate St., London, E.C.1. Tel. MON 6822

EDDYSTONE RADIO

Have vacancies for

Engineers and Draughtsmen to take up responsible positions in their expanding Development organisation which is concerned with the design of U.H.F. and V.H.F. Receiving and Transmitting equipment.

Applicants must be men with experience in similar fields and have ideas and the ability to carry them through to a satisfactory conclusion.

These posts offer excellent future prospects, good working conditions and carry a superannuation and life assurance benefit.

Salaries dependent on age, experience and qualifications.

Applications will be dealt with in strict confidence and should be sent to:—

The Technical Director
Stratton & Co. Ltd.
West Heath
Birmingham, 31

ASSISTANT ACOUSTICS ENGINEER

A major organisation in the Electrical Engineering field has an opening for a young man preferably between the ages of 25-30. A good education with possession of a Degree or Higher National Certificate in Physics and/or Radio and Mathematics are essential qualifications, and preferred candidates should have had R.A.F. Radio or Radar experience. It is also desirable, but not essential, that candidates should have pursued an advanced course in Acoustics.

The initial location of the post will be in London but in due course the Unit will move to the West Country. Full transfer allowances would be payable on change of location, and housing may be made available in approved cases.

A generous salary is envisaged together with Pension and Life Assurance Benefits.

Applications, stating age, qualifications and experience to Box No. 4616 c/o "Wireless World."

ENGINEERS!

Whatever your age or experience, you must read "ENGINEERING OPPORTUNITIES." Full details of the easiest way to pass A.M.I.Mech.E., A.M.I.C.E. C & G (Electrical, etc.) General Cert. etc. or "NO PASS—NO FEE" terms and details of Courses in all branches of Engineering—Mechanical, Electrical, Civil, Auto, Aero, Radio, etc., Building etc. If you're earning less than £20 a week tell us what interest you and write for you copy of "ENGINEERING OPPORTUNITIES" today—FREE!

B.I.E.T.
87 Colclough House, 29
21, Wright's Lane
London W.8

"AS-NU"

REGUNNED T.V. TUBES

Supplied from stock and despatched by British Railways same day. COMPLETE NEW GUNS fitted in every tube and fully guaranteed for TWELVE MONTHS.

	Mullard	Mazda
12in. ...	£5 0 0	£5 0 0
14in. ...	£5 0 0	£5 15 0
15in. ...	—	£6 10 0
16in. ...	£6 10 0	—
17in. ...	£6 0 0	£6 10 0
21in. ...	£8 10 0	£8 10 0

Plus 5/- carriage.

Other types available. Please contact.

J. P. WRIGHT

1a Shotton Street,
Doncaster

Sole Distribution Agent

Phone: DON 2636 or 66252.

THE NEW TUTOR DE LUXE TAPE RECORDER RUNS AT 1 1/2" INSTEAD OF 1 1/8" p.s.



The new "TUTOR" Amplifier with superimposing and mixing facilities and Power Pack completely assembled and mounted on grey rexine covered wooden frame, to be used with Collaro Mk.



4 Deck. Complete with instructions and diagrams £20/10/-.

Learn Languages with a Tape Recorder.

Elementary Course, £3/3/-.

Advanced Course, £6/6/-.

New Russian recordings available. Enquiries invited.

TUTOR · TAPE COMPANY
10 LYONS PLACE, LONDON, N.W.8

Telephone: Paddington 8555
Cables: Tutape LONDON

UNITED KINGDOM ATOMIC ENERGY AUTHORITY

PRODUCTION GROUP

INSTRUMENT MECHANICS

Windscale and Calder Works, and Chapelcross Works require experienced men with knowledge of electronic equipment and/or industrial instrumentation for fault diagnosis, repair and calibration of a wide range of instruments used in nuclear reactors, radiation laboratories and chemical plant. This interesting work involves the maintenance of instruments using pulse techniques, wide band low noise amplifiers, pulse amplitude analysers, counting circuits, television, and industrial instruments used for the measurement of pressure, temperature and flow.

Men with Services, Industrial or Commercial background of radar, radio, television, industrial or aircraft instruments are invited to write for further information. Training in our Instrument School will be given to successful applicants.

Married men living beyond daily travelling distance will be eligible for housing. A lodging allowance is payable whilst waiting for housing. Working conditions and promotion prospects are good.

Applications to:

Works Labour Manager, Windscale and Calder Works, Sellafield, Seascale, Cumberland.

or

Labour Manager, Chapelcross Works, Annan, Dumfriesshire, Scotland.

UNITED KINGDOM ATOMIC ENERGY AUTHORITY

INSTRUMENT MECHANICS

The Dounreay Experimental Reactor Establishment requires experienced men with knowledge of electronic equipment and/or industrial instrumentation for fault diagnosis and repair and calibration of a wide range of instruments used in nuclear reactors, radiation laboratories and chemical plant. This interesting work involves the maintenance of instruments using pulse techniques, wide band low noise amplifiers, pulse amplitude analysers, counting circuits, television, and industrial instruments used for measurement of pressure, temperature and flow.

Men with Services, Industrial or Commercial background of radar, radio, television, industrial or aircraft instruments are invited to write for further information. Training in our Instrument School will be given to successful applicants.

Married men living beyond daily travelling distances will be eligible for housing. A lodging allowance is payable whilst waiting for housing. Working conditions and promotion prospects are good.

Applications to:

Deputy Works Labour Manager,
Dounreay Experimental Reactors Establishment,
Thurso, Caithness, Scotland.

J. Greaves

11 Marlborough Road, Town Moor,
Doncaster

TERMS: Cash with order. All orders despatched same day. 6d. per item postage. Post free over £3. 5% discount on orders of £10 or over. All valves BRAND NEW and GUARANTEED.

Mail Order Only. NO CALLERS.

5Y3GT	6/6	DH77	5/6	EZ90	6/-
6Z4GT	9/-	DH142	7/6	EZ91	6/6
6AQ5	6/6	EABC80	7/6	EZ90	5/8
6AT6	7/-	EBF80	8/-	OC45	12/-
6B8M	3/-	EBF89	8/-	OC71	9/-
6BJ6	5/-	ECC40	12/6	PCF82	9/6
6BW6	6/6	ECC81	5/6	PCL82	9/6
6K7GT	5/-	ECC82	6/6	PCL83	11/-
6K8G	6/-	ECC83	6/6	PCL84	11/-
6L18	9/-	ECC84	7/6	PL36	13/-
6V6GT	6/-	ECC85	8/-	PL81	10/6
6X4	5/6	ECH42	8/6	PL82	7/6
7B4	7/-	ECH81	8/-	PL83	8/6
7BT	7/6	ECL82	10/6	PX4	13/-
7C6	7/6	EP8	5/6	PY32	12/-
787	9/-	EP40	13/-	PY81	7/-
12AH8	8/-	EP80	5/6	PY82	6/6
12AT7	5/6	EP85	6/6	PY83	8/-
12AU7	6/6	EP86	10/6	TP2620	15/-
12AX7	6/6	EP89	8/-	U26	11/6
12BE6	8/6	EP91	4/-	UAF42	8/6
12SK7M	4/6	EL84	8/-	UCH81	9/-
25Y6G	8/6	EM4	7/-	UCL82	11/6
36Z3	12/6	EM81	9/-	UL41	7/-
14A86	13/6	EM85	10/-	UL84	8/-
1629	4/-	EY61	9/6	UY85	6/6
DF96	8/-	EY86	8/6	VX150/30	5/6

New Metal Rectifiers

RM2	5/-	RM4	11/-	RM6	17/6
14A86	13/6	14A100	17/-	14A130	21/-
18BA1-1-16-1	7/-	FC101	13/6	PC81	17/6

LISTS FREE

ELECTRONIC ENGINEER

with degree or equivalent, to take an important position with small Company on South Coast. The post would quickly lead to a directorship for a man with a keen and versatile mind. Design of Transistorised Radio circuitry, particularly marine, would be a specialisation. A good salary will be offered to the right Engineer. Write stating full details career and salary expected.

Box No. 5073 c/o "WIRELESS WORLD".

TEST ENGINEERS. Applications are invited from Senior Test Engineers with previous industrial experience of testing radio communications receivers and transmitters. Successful applicants will be offered positions on the Company's permanent staff. Starting salaries commensurate with qualifications and experience. Apply in writing, giving full details, to Personnel Officer, REDIFON LTD., Broomhill Road, S.W.18

ELECTRICAL AND ELECTRONIC ENGINEERS

Applications are invited from suitably qualified Engineers to join a Team engaged on the development of high frequency power systems covering

TURBO-ALTERNATORS, TRANSISTOR INVERTORS and POWER DISTRIBUTION connected with the **BLUE STREAK LONG RANGE BALLISTIC MISSILE**

Qualifications should include a Degree or H.N.C. although applicants with similar experience and background will be considered.

These vacancies offer interesting and progressive positions in a rapidly expanding organisation, and assistance with housing can be given in appropriate cases. Applications should be addressed to:—



THE PERSONNEL MANAGER (Ref. STE2)

DE HAVILLAND PROPELLERS LIMITED
Stevenage, Herts.

BRITISH NATIONAL RADIO SCHOOL

PRINCIPAL: Mr. J. SYKES, M.I.E.E.,
M.Brit.I.R.E.

Britain's only Privately Owned
and Conducted Radio Correspondence
School
(Est. 1940)

Not the BIGGEST—
simply the BEST

for
**City & Guilds, Brit.I.R.E.
and P.M.G. (Part 1)**

Also Morse Code on Records
**B.N.R.S., 66 ADDISCOMBE RD.,
CROYDON**
Phone ADDiscombe 3341

VALVE VOLTMETER



MODEL V.O.S.C. is a 40 range instrument employing a balanced bridge D.C. amplifier circuit, using a low capacity Probe for all A.C. measurements.

Ranges cover from 1.5 volts F.S.D. to 1000 volts D.C., A.C. and V.H.F.

Maximum sensitivity is 7.5 meg ohms per volt. D.C. current ranges commence at 0.15µA. F.S.D. Resistance ranges cover from 0.1Ω to 500 meg ohms.

The Meter has a very stable zero and is designed for long term accuracy and very low drift.

Power supply 200/250V. A.C.

Price **£36 . 0 . 0**

complete with accessories.

Please write for specification to:

SWAN ELECTRONICS

75, Bellenden Road, London, S.E.15.
Telephone: NEW X 7136.

BRAND NEW RE-ENTRANT Ex. M.O.S. LOUD HAILERS



HEAVY DUTY—ALL METAL WEATHERPROOF

20 watts Output, 15 ohms Impedance
Size: 15" dia. x 15" deep

ONLY **£8** CARR. 10/-

Special Terms for Quantities
EXPORT FACILITIES NO PROBLEM

RADIO FACTORS LTD.

104 GIFFORD ST., LONDON, N.1
NORth 1814

"BARGAINS WITH PERSONAL SERVICE."

ROTAry CONVERTORS. 24 v. d.c. Input, 230 v. a.c. 50 c. 100 watts output, brand new, 24/10/-. Ditto, 125 watts, 24/17/6. A few of these models, store soiled, at a reduction of 10/-. Ditto, 150 watts, new 25/10/-. with sliding resistor for same 26. Carriage on all the above 7/6, outside mainland extra.

ROTAry CONVERTOR. By Lancashire-Crypto, 24 v. d.c. Input, 230 v. a.c. 50 c. 135 watts output in wood carrying case, with 3-pin flush output socket, absolutely brand new and unused in original packing case, 27/19/6, carriage 10/-. A small number left, 24 v. d.c. Input, 50 v. a.c. 50 c. 4 amps. output, in steel case, 22/10/-. Auto transformer 50/230 v. to suit same, 21/19/-. carriage on each 8/-.
CRYSTAL CALIBRATOR, NO 10. Xtal controlled 1.5 to 10 Mc/s, can be used up to 30 Mc/s, used but in good condition, 39/6. New and unused complete with instruction book in carrying haversack, 55/-. P.P. 2/6.

COMMUNICATION RECEIVER R107. 9 valve, 3 waveband, 1.2-17.0 Mc/s (18-250 metres). Mains 100/23 a.c., also 12 v. d.c. Used but in very good condition, only 27/19/6, carriage 21 mainland.

CR100 RECEIVER. Very good condition, 219; CR 100/2 and 8 Mod, 223/10/-. Carriage 21 mainland.

BATTERY CHARGERS. 230 v. a.c. Input, 24 v. d.c. output at 10 amps, with meter, fine and coarse controls enables 6, 12, or 24 v. batteries to be charged, fused with on/off switch. 29/10/-. Carriage 21 mainland.

RECTIFIER SETS. 230 v. 1ph. Input, 24 v. d.c. at 28 amps. output, 212/10/-. 230 v. ditto, 36 v. at 50 amps. output, 217/10/-. 230 v. ditto 3 ph. 36 v. at 50 amps., 220. 389/440 v. 3 ph. Input, 36 v. d.c. at 50 amps. output 227/10/-.
NIFE ALKALINE BATTERIES. 25 a.h. 1.2 v. per cell, 10/- ea. P.P. 1/6.

CONDENSERS. "Pyranol" oil filled 10 µF 2 kv. wkg. (part of the Transmitter ET4339) 22/6 ea.; 1 dozen lots at 19/- ea.; 50 to 100 16/- ea. Packing and carriage at cost.

HEADPHONES. Ericson high resistance 4,000 ohms, 15/6. P.P. 1/-. D.L.R.5 low resistance, 7/- ea. with breast microphone 9/6. P.P. on each 1/-.
ROTAry TRANSFORMER. 6 v. d.c. Input, 235 v. d.c. output 175 mA., type 57 by Hoovers, brand new, 17/6; 12 v. ditto midjet type 310 v. d.c. output 30 mA. 10/6. P.P. 1/-.
TELEGRAPH LINEMEN'S SAFETY BELTS. Leather 2in. x 3in., double buckles, with safety catch, a must for all climbing purposes. Brand new, 17/6. P.P. 2/-.
HAND MICROPHONE. Moving coil No. 13, round, 2in. diameter, with thumb press switch, brand new, only 12/6. P.P. 1/-. Inserts for same, 4/6. P.P. 6d.
ANTENNA CURRENT INDICATOR. U.S.A. New 2in. flush, 8/6. P.P. 6d.
AERIAL VARIOMETERS. Part of 19 set Mk. II. New. 13/6. P.P. 1/6.

373 MINIATURE I.F. STRIP. F.M. conversion, 9.72 Mc/s, complete with 6 valves. Conversion details "P.W." April 1957. Now only 29/6. P.P. 1/6.
CONTROL UNIT, U.S.A. Case 12 x 6 x 3in., hinged lid, with 1 mA 2in. meter flush fitted, 5 micro and 2 toggle switches, relays, condensers and other components. wonderful bargain, 22/6. P.P. 2/6.

CONTROL BOX, U.S.A. Fitted 2in. 1 mA. flush meter, 2 toggle switches and other components, 12/6. P.P. 1/-.
MEGGEES. 500 v., Series 2 Model, 100 Megohms, 418/10/-. Post 5/-.
CABLE AND WIRE. Henly's new, Uuirubber 2.5. 14/0076, 10/6, 100 yds., P.P. 2/-; 420 yd. coils 35/6 P.P. 5/6. Uniflex single screened 2.5, 17/6. P.P. 3/6, per 100 yards. Dumet Twin screened 23/0076, 35/- 100 yds., P.P. 5/-. Equipment Wire, 14/0048 p.c. 100 yds. 6/-, P.P. 1/-. Ditto, 70/0076 340ft. coils 11/6, P.P. 2/-.
RADAR EQUIPMENT. 3 Centimetre U.S.A.. RT10/ APB with Scanner. Powered by Douglas Generating plant with 24 v. 500 v. 2,000 c. alternator, the whole folds away in a light two-wheeled trailer, 275. Transport by arrangement. Photograph.
Terms. C.W.O. or approved monthly accounts. S.A.E. Inquiries.

A. J. THOMPSON
"EILING LODGE," CODICOTE, HERTS.
Phone: Codicote 242

TWO FIRST CLASS T/V ENGINEERS

REQUIRED

Good wages. Permanent position.
Clean driving licence.

T. A. BERRY (Lodge Radio) LTD.
6/7, Castle Parade EWELL 2317

PRECISION SHEET METALWORK

We specialise in manufacturing of
Chassis in all metals, large or small
quantities to your own specifications

V. W. BEAMISH

Shardeloes Garage, Shardeloes Rd., New Cross
London, S.E.14.

Telephone: TIDeway 4795

AMPLIVOX LTD

BERESFORD AVE., WEMBLEY

have vacancies for

- 1) **PRODUCT DESIGNER** for hearing aids, headsets, etc. Experience desirable on the design of small domestic appliances, motor car accessories or other well-styled electrical products using various types of materials.
- 2) **ELECTRONIC RESEARCH ENGINEER** for interesting work on the design and development of miniature transistorised electro-acoustical devices.

Both positions offer excellent working conditions, canteen facilities, pension scheme and four figure salaries commensurate with experience. Applicants who must be qualified in both instances to H.N.C. or equivalent are invited to write full details to Personnel Officer.

MAINS RADIO & TELEVISION FROM 12 VOLT CAR BATTERY

INDEPENDENT 200/240 volt MAINS SUPPLY
AMERICAN DYNAMOTOR UNIT. Input
12 volts, Output 200/240 volts at 100 to
130 watts and 180 watts.



Runs RADIOS, TELEVISIONS, MAINS
LIGHTING, ELECTRIC DRILLS and THOUS-
ANDS OF APPLIANCES. Runs anything
200/250 volts universal AC/DC.

Built for heavy continuous duty. Will last a
lifetime. Brand new condition. Fully tested and
ready for immediate use—SIMPLY PLUG IN.

Cost American Government \$40 Each

OUR PRICE ONLY 24

Carriage packing and insurance 20/-

SEND S.A.E. FOR FULL DETAILS.

Dept. B, SCIENTIFIC PRODUCTS,
Maser Works, Manor Drive, CLEVELLY,
BLACKPOOL, Lanes.

A. J. THOMPSON

"EILING LODGE," CODICOTE, HERTS.
Phone: Codicote 242

PARALEX ADJUSTABLE HOLE CUTTER

Morse Taper Shanks

No. 4, 3, 2, 1.

Par. Shanks from 3/8" to 1 1/8"

Up to 12 1/2" dia. Hole capacity.

TEN MODELS

Sold throughout the world

Send for illustrated

catalogue to




LUDFRY LTD.

5 Hanway Place, London, W.1.

Telephone: MU5eum 7472

**CLEAN AND SILENT
D.C. to A.C.
UP TO 100 WATTS
WITH THE NEW
FELGATE ELECTRONIC
INVERTER**

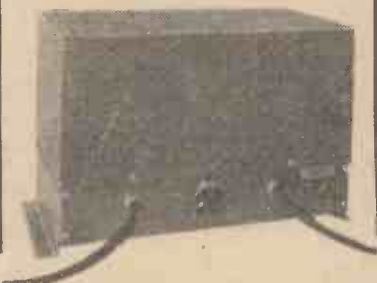

**NO MOVING PARTS
FREQUENCY CONTROL**

Manufactured by

**RADIO MAILING LIMITED
STUDLAND HALL, STUDLAND STREET,
LONDON, W.6.**

SERVO AND ELECTRONIC SALES LTD.

RECEIVERS R206. 50Kc-30Mc/s in 9 ranges Mains or batt. optn. £20 (carr. 15/-). MAINS/BATTERY POWER UNIT L382. 12 v. D.C. or 110-250 v. A.C. input. Outputs 12.8 v. 2 A. and 250 v. D.C. 75 mA. 19in. rack mounting. With circuit, 37/6 each (p.p. 5/-). MAINS POWER UNIT L204. 115 or 240 v. A.C. input, outputs 130 v. D.C. 35 mA. and 6.1 v. A.C. 2 A. With circuit in carrying case, 35/-, or without case 27/6 (p.p. 5/-). E.H.T. TOP QUALITY COMPONENTS TRANSFORMERS 230 v. A.C. to 5.5 kv. 3 mA. herm. sealed, 55/- (p.p. 3/6). CAPACITORS T.C.C. Visconol 0.02 uF. 11 kv. 12/6 (p.p. 2/6). 0.1 uF. 11kV. 17/6 (p.p. 4/-). COLVERN HELICAL POTENTIOMETERS CLR 2501, 50 K. 55/- (p.p. 1/6). TRANSFORMER 230 v. A.C. to 12 v. at 0.4 A. twice herm. sealed, 20/- (p.p. 2/-) HIGH STAB. RESISTORS. 5% tol., 22/6 per 100 (p.p. 1/6) (our sel.). Many 1% and 2% values available. HEADPHONES, 120 ohm, CLR5 6/6 (p.p. 1/6). CARBON MIKE INSERTS 2/3 (p.p. 9d.). QUARTZ CRYSTALS, octal base, 6.2 or 7 Mc/s, 6/- (p.p. 1/6). CAPACITANCE-RESISTANCE UNITS. 2 res. arms 1-4,332 ohms, 2 cap. arms 0.001-4,332 uF., data sheet avail., 17/6 (p.p. 3/6). WHEATSTONE BRIDGES, 0-200 ohms with 2.5-0-2.5 mA. meter in teak box 30/- each (p.p. 7/6). DRAYTON EQ GEARED MOTORS, 230 v. A.C. 37 r.p.m., 75/- each (p.p. 4/-). HIGH FREQUENCY MOTOR ALTERNATOR SETS, input 415 v., 50 c.p.s., 3 ph., 8 h.p. output, 200 v. 1,100 c.p.s. 1 ph., 9 KVA. £72/10/- c.p. Another, input 50 v. D.C. output 80 v. 2,000 c.p.s. 650 w., 170/- (carr. 20/-). Another, input 230 v., 50 c.p.s., 1 ph., output 280 v., 400 c.p.s., 1 ph., 650 w., plus 200 v. 400 c.p.s., 1 ph., 280 w., £49/10/- c.p. Another, input 26 v. D.C., output 115 v., 400 c.p.s., 45 w., 120/- (p.p. 7/-). RECTIFIER UNITS, input 200-250 v. A.C. output 12-4-12 v., 3 A., 92/6 (carr. 7/6). SMOOTHING UNITS for use with this item 37/6 (carr. 10/-). Both units 19in. rack mounting. POWER UNITS TYPE 3. Input 200-250 v. A.C., metered output 220 v., 100 mA. D.C. and 6.3 v., 4 A. A.C. 60/- (carr. 10/-). INDICATOR UNIT APW 9922A, 1-VC97, 3-VR91, 2-VR54, 1-CV1285, 1-VT61, mumetal shield, focus and brilliance controls, 8 pots, ideal for scope conversion or C.R.T. display unit. New, with dcmt 37/6 (carr. 5/-). TELCON TYPE 530 COAX. CHASSIS SOCKETS, new 10/- doz. (p.p. 2/6). 100/- per gross (p.p. 7/6). £30 per 1,000 (c.p.). NITROGOL CAPACITORS, 400 v. wkg. at 71°C. 1 uF., 2/3 (p.p. 1/-). 2 uF. 2/9 (p.p. 1/-). CAM-CORRECTED POTENTIOMETERS, 10 K., type CLR302, 35/- (p.p. 3/1). POTENTIOMETERS, 500 ohm, 6 W., each with knob, 2/-, ea., 17/- doz., £9 per gross (p.p. 7d., 2/6, 12/6 respectively). MINIATURE MERCURY SWITCHES, s.p.c.o., 4/- (p.p. 6d.). ADMIRALTY SOUND POWERED TELEPHONE SETS, good condition, 75/- per pr. (p.p. 8/6).

Post orders to:-

1. HOPTON PARADE, STREATHAM HIGH ROAD, LONDON, S.W.16.

Callers to:-

43, HIGH STREET, ORPINGTON, KENT.

Tels.: Strentham 6166 and Orpington 31089

Terms: Nett O.W.O. monthly approval accounts.

**A NEW LEASE OF LIFE
For your T.V. Tube**

Pat. pending
Reg. design.
B12A

Price 30/-
Post, packing
& Ins. 2/6



Postal orders
C.W.O., C.O.D.
Postage and Packing
2/6.

No Soldering
No Wiring
Just Plug in
It's Automatic
It's Guaranteed

One of the most common T.V. Tube faults is low emission resulting in loss of brightness, negative picture, or silvery screen.

The Sinclair Unit restores the cathode emission and corrects the above faults, for a very low cost. Applicable to all sets operating off A.C. mains. IMPORTANT. State make of set, Model No. Tube employed. Failure of tube to reactivate. Unit must be returned within 7 days for money back.

SINCLAIR ELECTRONICS

Dept. WW, 18 Newport Court,
Charing Cross Road, London, W.C.2

Phone: REG 5520

A MAST PROBLEM? Skymasts

BEADON GARAGE BEADON ROAD LONDON W6 Telephone RIVERSIDE 1124 and 7878

REPANCO MINI-3

A new local station pocket transistor Radio.

- Size 5in. x 3½in. x 1¾in.
- Long and Medium Wave.
- Dual Ferrite Aerials.
- Loudspeaker reception.
- Regenerative RF Reflex Circuit.

Send Now! 1/6d. (post free) for easy wiring plans, instructions and price list.

Mail Order and Trade:

**RADIO EXPERIMENTAL
PRODUCTS LTD.,
33 Much Park St., COVENTRY
Tel.: 62572**

Wholesale Enquiries and Export:

**REPANCO, LTD.,
O'Brien's Buildings, 203-269,
Foleshill Rd., COVENTRY.
Tel.: 40594**

54 GNS.-"17"



A full specification 17in. Television Receiver to Spencer-West standards now available at your Dealers. Remarkable performance and priced at 54 Gns. only, complete.

For Leaflet apply to:-

SPENCER-WEST LTD.

Quay Works, Great Yarmouth, Norfolk
Phone: 4908
Grams: Spencer-West, Great Yarmouth



YOU are invited to apply for a copy of our illustrated brochure and price list which gives full details of our wide range of

QUARTZ CRYSTAL UNITS

which are renowned for their
Accuracy & Reliability

THE QUARTZ CRYSTAL CO. LTD.

Q.C.C. Works, Wellington Crescent, New Malden, Surrey. Telephones: MALDEN 0334 & 2988

PULLER ELECTRONICS

FREQUENCY STANDARD

Accuracy 1 part in 10⁴ with a frequency coverage 500 cycles to 300 Mc/s for signal calibration. Generates a signal of at least point one volt across 80 ohm load from 2 kc/s to 10 Mc/s with an accuracy of 1 part in 10⁴.

SPECTRUM ANALYZER

TSX-4SE 3cms. Klystron 2K25 Frequency range.

POWER METERS

TBN-3EV. Thermistor W. Bridge.
Type 17. UHF-VHF 0-40 watts. Oil cooled.
CT-101. UHF.

VALVE VOLTMETERS

Balantine 10cy/s-150kc/s. Can also be used as an amplifier with variable gain.

KLYSTRON POWER SUPPLIES

Several types for high and low voltage klystrons, also associated selective amplifiers bridged T type.

RECEIVERS

Ferris 32A Field Strength Meter 200kc/s-20mc/s. Will measure down to 1 micro-volt.
R1294 500-300mc/s Local Oscillator CV52.
P58 300-600mc/s with RF Stage.
AR-88D.

SIGNAL GENERATORS

Type 13/TF-948 CW/AM/FM/Pulse frëq. 20-80mc/s.
C.T.-53 frëq. 8-300mc/s.
LAEI CW/Pulse frëq. 503-1330mc/s max output 100mv.
TTX-10-RH 3CM FM Test Set.

Service Facilities for Most Types of Electronic Equipment

PULLER ELECTRONICS

IA, WHITEHALL PARK, LONDON, N.19

ARCHway 1678

TECHNICALLY TRAINED BY



IN RADIO, TELEVISION AND ELECTRONICS ENGINEERING

Opportunities in Radio Engineering and allied professions await the ICS trained man. ICS Courses open a new world to the keen student. . . .

RADIO AND TELEVISION ENGINEERING; RADIO AND TV SERVICING; RADIO SERVICE AND SALES; VHF AND FM ENGINEERING; ELECTRONICS, etc. ICS Courses give very real help to the man setting up his own business or facing a technical career in the radio industry.

Examination Courses for:—British Institution of Radio Engineers, City & Guilds Telecom. Tech., Radio Servicing (R.T.E.B.) & Radio Amateurs, (C. & G.).

LEARN-AS-YOU-BUILD PRACTICAL RADIO COURSE
Build your own 4-valve TRF and 5-valve superhet radio receiver
Signal Generator and High-quality Multi-tester.

FILL IN AND POST THIS ICS COUPON TODAY
It brings the FREE ICS Prospectus containing full particulars of ICS courses in Radio, Television and Electronics.

**INTERNATIONAL
CORRESPONDENCE
SCHOOLS**

... A WHOLE WORLD
OF KNOWLEDGE for
the KEEN STUDENT

International Correspondence Schools,
Dept. 222P, Intertext House, Parkgate
Road, London, S.W.11

NAME.....AGE.....

ADDRESS
Block Capitals Please

OCCUPATION..... 10.59

TEST EQUIPMENT

BEAT FREQUENCY OSCILLATORS

0-10 kc/s. Furzehill No. 5 metered output of 2 watts into 10 or 600 ohms. Size 17½ x 9 x 11. 7 valves. £12.

TESTERS T.M.S. No. 1 Mk. 2

A precision audio test set by Muirhead, ideal as a laboratory sine wave source. 100-40,000 cps. Range easily extended down to 10 cps. £40.

MARCONI SIGNAL GENERATORS

TF144F. 85 kc/s. to 25 Mc/s. With mains lead, dummy aerial and instructions. £35.
TF390G. 16-150 Mc/s. 0.1 µV. to 100 mV. Complete with new calibration and instructions. £18/10/-.

R.G.A. H.F. SWEEP GENERATOR

A versatile frequency modulated signal generator for alignment of R.F. and Video circuits. Centre frequency range 5-65 Mc/s. Sweep deviation 0.2 to 20 Mc/s. Frequency marker 5-70 Mc/s. Output 0.5 volt max. with variable attenuation to over 30 db down. Complete with stabilised power unit for 115 or 230 volt A.C. input. £30.

G.R.T.s 5SP7A

Twin gun precision oscilloscope tubes with a flat screen and 1 P.D.A. ring. Standard base. £22.

TRANSMITTING TUBES

4-400 A. 720 watts R.F. output. Max ratings to 100 Mc/s. £12/10/-.

WAVEMETER TP643A

20 to 300 Mc/s. in 4 ranges. Complete with calibration charts, instructions, spare valve, incorporates a 50 µA meter. Brand new in padded transit case. £6.

All the above equipment, whether new or re-conditioned, is in first-class condition and working to original specification. More data and our full list of test equipment will be forwarded on request.

Portland Pays Postage and Packing

PORTLAND ELECTRONICS

20 Portland Place, Stalybridge,
Nr. Manchester STA 2148

5,000V. INSULATION TESTERS



5,000v Insulation Testers

Voltage indication by Magic Eye.
Power supply 200-250 A.C.
Dimensions 18 x 18 x 13in.
Made for flash testing and for the measurement of the breakdown voltage of electrical components and insulation. A spring-loaded switch is fitted in the test prod which keeps the 200/250 v. supply switched off. Original cost £75
Our price brand new in fitted transit case **£24**

LIMITED QUANTITY ONLY

Tape Recorder or Gram Unit cases size 17½ in. x 13½ in. x 10in. Walnut 35/- each, carriage 5/-.
G.45 16 mm. Cine Cameras with magazine, ex Govt. f/3.5 lens, £4 each, polished.
Rectifier Units. 240 v. A.C. in, 100/120 v. D.C. out. at 2.5 amps. £12/10/-.
Carriage 20/-.
Transformers. 210/250 v. in 275 v./0/275 v. 50 mA 6.3 v. at 3a CT 17/6. 0/240 v. in, out 150 v./0/150 v. 215 mA 500 v./0/500 v. 200 mA 6.3 v. at 3 amps 6.3 v. at 2 amps 5 v. at 3 amps 32/6. 0/240 v. (350/0/350 v. 450/0/450 v. 550/0/550 v.) 250 mA 40/4 v./6.3 v. at 4 amps 0/4 v./6.3 v. at 4 amps 0/4 v./6.3 v. at 3 amps 0/4/5 v. at 3.5 amps 37/6. 0/240 v. in, 550 v. out 290 v./0/20 v./450 v./640 v./820 v. out 6.3 v. at 3 amps 6.3 v. at 4 amps 6.3 v. at 3 amps 6.4 v. at 2 amps 42/6.
Pots. 1K, 2.5K, 10K, 40K, 2HEG 4/- each. Post 9d.
Tygan fret 2/- sq. ft.


Transformers Step Down

200 250 v. in 30 v. out 100 watts 17/6, post 2/-.
200 250 v. in 110 v. out 100 watts 17/6, post 2/-.
Voltage Regulators 230 v. 150 w. by Selec 15/-
Earphones and Mics 6/- set.
CARBON HAND MIKES 2/6.
Meters 0.35 mA 10/-; 0.5 mA 10/-.

HARRINGAY SUPPLIES

345 HORNSEY ROAD, N.19 ARC 4107

Fidelia



Eleven years ago the Fidelia range of hand built real high fidelity equipment was introduced. Based on over twenty years' experience of high quality sound reproduction its soundness of design and construction has both outlived many passing fads and permitted original models to be rebuilt at modest cost to provide VHF reception and other facilities.

Our present range includes:

Fidelia Major AM/FM tuner unit with pre-amp, tone controls, etc. R.F. stage on all wavebands, variable selectivity, etc. Price £27/4/-, or with the Major amplifier, £42/14/-.

Fidelia Imperial, VHF tuner. Price £15/5/-, or with pre-amp. and tone controls, £19.

Fidelia Precision, switched VHF tuner. Price £14/8/-, or with pre-amp. and tone controls, £19.

Fidelia Precision built as a VHF Radiogram chassis, 3 watts output, bass and treble controls, an ideal small quality unit, £21.

Fidelia Major amplifier, £18.

Fidelia Mk. I. Stereo amplifier with control unit, £25.



ELECTRO
Acoustic
DEVELOPMENTS

Full details willingly on request,
(6d. for postage is appreciated.)

2 AMHURST ROAD
TELSCOMBE CLIFFS
Nr. Brighton,
SUSSEX.
Tel.: Peasehaven 8166

Z. & I. AERO SERVICES LTD.

14 South Wharf Road, London, W.2

Telephone: AMBassador 0151/2 Cables: ZAERO, LONDON

A.R.B. Approved Stockists

RETAIL BRANCH: 85, TOTTENHAM COURT ROAD, LONDON, W.1.

AUDIO OSCILLATORS

Hewlett Packard Model 200A. Resistance tuned Oscillator with a frequency range of 35 to 35,000 c/s in three ranges. Max. output 1 watt into 500 ohms with distortion not exceeding 0.5%. Output is not metered. Power Supplies 115V A.C.
PRICE, new, fully guaranteed £28 0 0
Packing and carriage 15/-

HEWLETT PACKARD MODEL 205AG.

Resistance Tuned Oscillator with a frequency range of 20c/s to 20kc/s in three bands. Output 5 watts into 50, 200, 600 and 5,000 ohms with distortion not exceeding 1%. Output Meter; Input Meter. Calibrated Attenuator.
PRICE, fully overhauled and guaranteed £85 0 0
Packing and carriage 1 0 0

LO-50 B.S.R. AUDIO OSCILLATOR.

Frequency range 0-16,000 c/s; Maximum Output 0.5 Watts into 600 ohms. Output Meter. Tuning by means of two dials. Power Supplies 230V A.C.
PRICE, fully overhauled and guaranteed £30 0 0
Packing and carriage 1 0 0

MODEL 134 CATHODE FOLLOWER VALVE VOLTMETER AND A.C. AMPLIFIER

Measure A.C. Voltages from 100uV to 200V at frequencies from 300c/s to 200kc/s with an accuracy of 3%. Can also be used as stable A.C. Amplifier with a gain of 4,000 and maximum output of 10 Volts into 10 kohms. Input Impedance 100 megohms.
PRICE, fully guaranteed £35 0 0
Packing and carriage 1 0 0

WAVE-WATTMETERS TS-3/AP

Frequency range 2700-3400mc/s. Frequency measurement accuracy 0.5mc/s relative Power range 0.5 to 250mW. Power measurement accuracy 1 db. The instrument consists of a high frequency chamber containing a thermistor, a cavity type wavemeter, crystal detector and a D.C. Milliammeter.
PRICE, complete with wavemeter calibration charts, fully overhauled and guaranteed £45 0 0
Packing and carriage 15/-

EVERSHED SERIES 2 BRIDGE MEGGERS

500 Volts, 100 megohms, unused and fully guaranteed £65 0 0
1,000 Volts, 200 megohms, fully overhauled and guaranteed £65 0 0
Packing and carriage 1 0 0

PORTABLE METERS

0-160V AC/DC M.I., 8in. Mirror Scale, unused and fully guaranteed £5 0 0
0-150/300V Dual Range AC M.I., 5in. Mirror Scale, fully overhauled and guaranteed £5 10 0
0-150/300V Dual Range AC/DC M.I., 5in. Mirror Scale, fully overhauled and guaranteed £5 19 6
0-150 Amps AC M.I. Weston model 155, 5in. Mirror Scale, unused and guaranteed £6 10 0
Packing and carriage 10/-

OSCILLOSCOPES

COSSOR TYPE 339 DOUBLE BEAM OSCILLOSCOPE. 2-stage "Y" Amplifier and H.F. Compensated Amplifier. Time Base 6c/s to 250kc/s.
PRICE, fully overhauled and guaranteed £30 0 0

ERSKINE MODEL 13 DOUBLE BEAM OSCILLOSCOPE. 2-stage "Y" Amplifier and H.F. Compensated Amplifier. Time Base 2c/s to 750kc/s. Time Base Calibration marks independent of "Y" input, at 1 and 10 microseconds intervals.
PRICE, fully overhauled and guaranteed £55 0 0

DUMONT MODEL 241 SINGLE BEAM OSCILLOSCOPE. Time Base 15 to 30,000c/s. Provision for brightness modulation of the trace to mark another event on the C.R. screen.
PRICE, fully overhauled and guaranteed £30 0 0
Packing and carriage £1 10 0

SPECIAL OFFER OF NEW METERS

Galvanometer 10-0-10 microamps, 2 1/2 in. Rd. Fl. Mtd. 45/-
200 Microamps M.C. 2in. Rd. Fl.Mtd., Calibrated every 5 microamps 32/6
200 microamps M.C. 2 1/2 in. Rd. Fl.Mtd., Weston model 301, calibrated every 5 microamps 35/-
200 microamps M.C. 2 1/2 in. Sq.Fl.Mtd., Westinghouse model RX35, or equivalent Simpson, calibrated every 5 microamps 35/-
500-0-500 Microamps FSD M.C. 3 1/2 in. Rd.Fl.Mtd., calibrated 50-0-50 22/-
Packing and carriage, per meter 2/6
Send S.A.E. for full list of meters

V.H.F. RECEIVER UNITS BC-625 (part of SCR-522 Transmitter-Receiver).

4 Crystal controlled channel, 100-156 Mc/s., (3.0-1.93 metres). Valves: 9003 R.F. stage; 9003 Mixer; Three I.F. stages 12SG7; Det/AVC/Audio 12C8; Second Audio

12J5GT; Oscillator 12AH7GT, Harmonic Generator 9002; Harmonic Amplifier 9003; Audio Squelch—other section of 12AH7GT. High and Low Impedance output.
PRICE, complete with valves, with description and circuit diagram, but without squelch relay P.P. 5/- 25/-
PRICE, chassis only, less valves ... P.P. 3/6 7/6

ALSO LIMITED QUANTITY ONLY: TRANSMITTER UNITS BC-624 (part of SCR-522 Radio Set).

Valves: Speech Amplifier 6S57; Push Pull Modulator (two 12A6); Oscillator 6G6G; 1st Harmonic Ampl. 12A6; 2nd Harmonic Amp. 832; Power Ampl. 832. Output 8 watts.
PRICE, complete with valves, description and circuit diagram P.P. 5/- 22/6
PRICE, chassis only, less valves ... P.P. 3/6 7/6
Descriptions and circuits available at 8d. each.

RECORDING INSTRUMENTS

TWIN PEN SWITCHBOARD PATTERN RECORDING MILLIAMMETER, Evershed and Vignoles, Sensitivity 5mA DC. Chart Width 6in. Electric Chart Drive 230V, at a speed of jin. per minute. Oil Dashpot Damping. Complete with Syphon and Gravity Pens, Ink, Dashpot Oil and two Charts.
PRICE, fully guaranteed £65 0 0
EXTRA for rewinding the movements to 1mA F.S.D. £5 0 0
Packing and carriage £1 0 0

SINGLE PEN SWITCHBOARD PATTERN RECORDING MILLIAMMETERS, Evershed and Vignoles, Centre Zero 2.5-0-2.5mA or open scale 5mA F.S.D. 6in. Chart driven by a 230V Electric Motor. Chart Speed jin. per minute.
PRICE, fully overhauled and guaranteed £50 0 0
Packing and carriage £1 0 0

We have other ranges in stock. Please state your requirements.

EVERSHED 12-PEN TIME RECORDER

Portable 12-channel instrument for simultaneous recording of 12 events with time marks provided by 12th pen. The recording is presented in the form of "on-off" pulses. Chart Speed 2 inches per second.
PRICE, unused, in original packing, complete with accessories and a supply of charts £30 0 0

PANEL MOUNTED TIME SWITCHES.

3in. Dia. Flush Panel Mounted Precision Time Switch. Will switch off up to 5 amps at 250V after an interval from 1/2 to 15 minutes. Calibrated every 1/2 minute. Invaluable for process work, developing etc.
PRICE, only 25/- P.P. 2/-

VALVES

All tested and guaranteed.

OC3W	6/6	6H6, doz.	12/-	808	17/6
OD3/VR150	5/6	6J5	4/6	832	15/-
155	7/-	6J6	4/-	957	2/-
1IU5	7/-	6L7	7/-	2051	7/6
2D21	8/-	6N7	6/-	9002	5/6
2X2A	4/-	6SL7GT	6/6	9003	7/-
354	7/-	6SN7GT	5/-	9006	3/-
5U4G	6/6	6SQ7	6/-	AW3(VS110)	4/6
5Y3GT	7/-	6V6G	5/6	EF50, Silver	1/6
5Z3	7/-	6X5GT	6/-	EF50, Red/Syl.	2/6
5Z4	9/-	12A6	5/-	KT33C	6/-
6A7	10/-	12AT7	7/-	KT66	7/-
6AK5	5/-	(ECC81)	7/-	QVO4-7	15/-
6AL5	7/-	12AU7	7/-	SP61	2/6
6AM5	7/-	(ECC82)	6/-	TT-11	3/-
6AT6	7/6	12H6	1/6	VR-53	4/6
6C4	2/6	12J5GT	1/6	VR-54	1/6
6G6G	2/6	25Z6	7/-	VR-56	4/6
		717A	5/-	VR-65	4/-
				VR-65A	5/-

SPECIAL VALVES

Thyratrons C3R14, 10/-
Klystrons: 417A, 40/-; 723A/B, 70/-.
Magnetrons: 2136, 120/-; 2142, 180/-; 5130, 40/-; QK59, QK60, QK61 QK62, 40/-.

CATHODE RAY TUBES

3ACP2, 20/-; 3AP1, 17/6; 3BP1, 12/6; 5ADP1, 40/-; 5CP1, 50/-; 5FP7, 50/-; 5SP7, 250/-; Mullard 15CDD28 60/-.
Packing and postage 2/6 in £.
Orders for 12 valves or more, postage paid.
Please write for full list of valves.

TR-1520 V.H.F. TRANSMITTER STRIPS

Consists of IF Crystal Oscillator CV-136, Push-pull Modulator (two CV-138), Doubler CV-136, Amplifier CV-309 and Output Amplifier CV-222; Frequency 115-145mc/s. Strip complete, with 4.86mc Crystal, less valves. 7/6. P.P. 1/6

ROTARY TRANSFORMERS

Type 47, input 6V; output 240V 50mA 30/-
DY1/ARR2X, input 12V, output 250V 50mA 35/-
ML-4312-35, input 24V, output 135V, 26mA 18/6
DY5/ARR-3, input 24V, output 180V, 100mA 25/-
3638, input 24V, output 220V, 60mA 18/6
DA1A, input 24V, output 230V, 100mA 22/6
DM32A, input 28V, output 250V, 60mA 22/6
ML-3420-175, input 24V, output 250V, 65mA and 6.3V, 2.8A 55/-
Type 76, input 24V, output 250V, 150mA 25/-
Type 106, 24V Input, output 250V, 200mA and 50V Grid Bias 100/-
Type 826, input 24V, output 250V, 60mA, contains DM-32 Dynamotor mounted on filter box with on-off relay 55/-
DM-416, input 24V, output 330V, 170mA 25/-
DY-19A, input 24V, output 400V, 400mA 35/-
Packing and carriage 2/6 in £

Please write for full list of Rotary Transformers, Power Units, etc.

TS-12 STANDING WAVE RATIO INDICATOR EQUIPMENT

consisting of Indicator Unit with meter calibrated direct in SWR values from 1 to 5, and Plumbing Unit containing Slotted Waveguide, Probes, Terminations and Adaptors. Frequency Range 9305 to 9445mc/s.
PRICE, fully overhauled and guaranteed £65 0 0
Packing and carriage 1 0 0

We wish to buy High Class Communication Receivers, Precision Electronic Test Equipment, etc.

We urgently require Hallicrafer UHF Receivers S-27C and Air Ministry Receiver R-1359.

Wireless World Classified Advertisements

Rate 7/- or 2 lines or less and 3/8 for every additional one or part thereof average lines 6 words. Box Numbers words plus 1/-. (Address replies: Box 0000 s/e "Wireless World" Dorset House Stamford St. London. E.11.) Trade discount details available on application. Press Day December issue Wednesday, November 4th. No responsibility accepted for errors.

WARNING

Readers are warned that Government surplus components and valves which may be offered for sale through our displayed or classified columns carry no manufacturers' guarantee. Many of these items will have been designed for special purposes making them unsuitable for civilian use, or many have deteriorated as a result of the conditions under which they have been stored. We cannot undertake to deal with any complaints regarding any such items purchased.

NEW RECEIVERS & AMPLIFIERS

AM/FM stereo chassis, 6w output with 2 speakers, only £20.—Bel Sound Products, Marlborough Yard, N.19. [0182]

RECEIVERS AND AMPLIFIERS SURPLUS AND SECONDHAND

C.R. 100 Receivers (reconditioned), £17 (p.p. £1); 1151 V.H.F. Tx's, £22.—B. R. Jessop, Hamble House, Hamble, Hants. [8699]

FOR SALE: Pye Car Radio 12v Type—P 24 CR c/w Speaker, good condition.—Box No. 5090. [8712]

HRO Rx's, etc., AR88, CR100, BRT400, HG 209, S640, etc., etc., in stock.—R. T. & I. Service, Ashville Old Hall, Ashville Rd., London, E.11. Ley 4986. [0053]

TRANSMITTING EQUIPMENT—SURPLUS AND SECOND-HAND

TEN Signals Vans fitted complete with R. 10 units, 2 Wireless senders, 2 Reception sets, 2 Power supply, 1 Unit Pulser, 1 Monitor, Auto Transformer 1.6 KVA 50 cycles 130/250 volts. Offers for whole or part.—Broadbent Bros. (Notting) Ltd., Deleside Road, Nottingham. Telephone 53927. [8703]

NEW DYNAMOS, MOTORS, ETC.

RUSSIAN thermo-electric generator including paraffin lamp, provides 90V at 10MA + 1.2V at 0.5A + bias; suitable operating any dry battery wireless sets; contains 100 thermo-couples for semi-conductor research; useful camping, boating and expeditions; post paid U.K.—£18.—International Technical Developments, Ltd., Colnbrook, Bucks. [8655]

TEST EQUIPMENT—SURPLUS AND SECOND-HAND

TAYLOR Universal Meter, model 85A. Excellent condition, very little used, £16.—Box No. 4828. [8685]

THE Corporation of Trinity House, Tower Hill, London, E.C.5, has the following equipment available for disposal—
1 Dumont Oscilloscope
1 Cossor Double Beam Oscilloscope Model 339A.

Offers for the above equipment must be received by The Secretary on or before Monday, 26th October, 1959. The equipment can be seen at Trinity House by appointment. [8683]

OFFERS for BC.221.T and LM.12 frequency meters in new condition, unmodified. Shipment can be arranged.—A. J. Reynolds, 149, Waller Rd., New Cross, London S.E.14. Telephone after 7 p.m. New Cross 1443. [8717]

AMERICAN Test Oscilloscopes type TS-34/AP. These instruments are a self contained portable unit with built in 110 volt power pack and were made for checking all types of radio and other electronic equipment. They are ideal for all service engineers for TV radio or similar purposes.

VALVES used 4-6AK5, 2-6AG7, 2-6BL7GT, 1-6BN7GT 1-5Y3, 1-6X5 and a two inch tube 2AP1, all controls are fitted along the sides of instrument and a carrying handle is fitted. All are complete but due to shortage are not sold as being in working order. All spare parts available. Our price £8/10 each or 2 for £15, plus 10/- part carriage and packing. DO not be put off by the price, they are a rare bargain and are worth many times this figure.

WALTONS Wireless Stores, 46-47, 48-49 Stafford St., Wolverhampton. [0106]

UNDOUBTEDLY THE BEST ... but cost no more!


Partridge
High Fidelity

Output Transformers 5-100 Watts



P4076
Baxandall
5 watt Amplifier.
Price 36/-.

P4131
Mullard
10 watt Amplifier.
Price 60/-.



P5203
Mullard
20 watt Amplifier.
Price 95/-.



TD5874
"AFN"
Stereo Amplifier.
Price 52/6.



Just released Transformers specified for Brimar 2/8P2 8 watt Stereo Amplifier.

P4136 P4137
Mains Output
Transformer Transformer
Price 85/- Price 52/6

Available for immediate delivery if any difficulty please fill in coupon for name of nearest stockist.

Partridge Transformers Ltd.
Roebuck Road, Chessington, Surrey

Please send to address below name and address of my nearest Partridge stockist. Also literature on standard range of transformers.

Name

Address

TEST EQUIPMENT—SURPLUS AND SECOND-HAND

SIGNAL generators, oscilloscopes, output meters, valve voltmeters, frequency meters, multi-range meters, etc., etc.—R. T. & I. Service, Ashville Old Hall Ashville Rd., London, E.11. Ley. 4986. [0056]

SIGNAL Generators Advance E.2., Advance F. and D.1., E.K. Cole and others, some unused, from £29/10. Q Meter Marconi Type T.F. 529 C £49/10 o.n.o. Taylor Meters M/C. Megger, Avo Variac and Watt meter all surplus to requirements.—Box No. 5098. [8713]

VOLTMETERS!!! Ammeters!!! Frequency Meters!!! Test Meters!!! Voltmeters. 4 1/2in. 0.300v. 50 cycles A.C. £3. 2in. 0.50v. D.C. 7/6. Ammeters. 6in. 0.50v. 50 cycles A.C. £4. 4 1/2in. 0.30v. 50 cycles A.C. £3. Frequency Meters. 4-in. 40-60 cycles. 250 v. A.C. with reactance unit. £8. Even Shed megger. Metal cased. 500v. £15. Insulation test set. 200/250v. 0.5KV. AC/DC with Electrostatic Voltmeter. £15. Tag Panes. Toggle, Rotary and lever switches. Instrument knobs. Terminal blocks. Start buttons. Solenoids. Switch fuses; s.a.e. For list to Speed Electrics. Dept. W. W. Church Street, Basford, Nottingham [8693]

NEW COMPONENTS

NEW miniature printed resistors 6d. each, postage 3d.; s.a.e. for leaflets.—Ray, 4 Dalton Avenue, Whitefield, Manchester. [8696]

AMAZING value: Philco Shortwave Car Radio converters, originally £10: to fit any existing car radio and add six extra wavebands, 16-19-25-31-49 metre bands, also standard broadcast, 6/12 volts, compact under dash mounting, chromium control panel with six press buttons, complete all fittings and instructions, easily fitted; 45/- post free; each instrument brand new with Mullard valves.—Tomlins, 127, Brockley Rise, Forest Hill, S.E.23. [8584]

COMPONENTS—SURPLUS AND SECOND-HAND

VALVES, new and used, from 1/6 each; all guaranteed, all types components cheap. radio, television books; lists free.—Hamilton Radio, 237 Sedlescombe Rd. N., Hastings. [0212]

WE have large stocks of pretty well all TV components, valves and tubes, at much lower than standard prices especially for old type receivers.—Cuttriss, Ltd., Birmingham 1. [8532]

CARBON Brushes, 2,400 boxes, 2-LT, 2-HT, in each box. For Dynamotor 5DY82-AB52. 1,200 A.F. Transformers, 10K/574, new, boxed. 1/4 x 200 ohm windings; offers wanted.—Annakin, 25 Ashfield Place, Otley, Yorks. [8686]

MAGSLIPS at low prices, fully guaranteed, 3 in Receiver No. 5 (AP 10661), 50v, 50c/s, unused, each in tin. 35/-, post 2/1; large stocks of these and other types.—P. B. Crawshaw, 94, Pixmore Way, Letchworth. Herts. Tel. 1851. [0087]

NEW GRAMOPHONE AND SOUND EQUIPMENT

TAPE recorders, Ferrograph, Vortexion, Brenell Telefunken, Truvox, Reflectograph, and M.S.S.

TAPE decks: Wearite Brenell, Truvox Bradmatic, Dulci-Harting, Amplifiers and tuners, Leak, Quad, R.C.A., Dynatron, and Dulci Microphones; Reslo, Lustraphone, Philips, Acos, Gramplan, etc. All tapes and accessories. Audio service department and recording studio. HIRE purchase facilities available. LAMBDA Record Company Ltd., 95 Liverpool Rd., Liverpool, 23. Great Crosby 4012. [8404]

GLASGOW—Recorders bought, sold, exchanged, cameras, etc., exchanged for recorders, or vice versa.—Victor Morris, 406, Argyle St., Glasgow, O.2. [0201]

OUR Oct. recommendation, a Unimixer 3-way mixing unit, to go with tape recorder you buy from us.—Sound News, 10, Clifford St., W.1. [0131]

CINE-VOX disc recording mechanisms for L.P. or standard operation from 30gns.-56gns.; also complete tape-disc or direct channels from 50gns.-112gns.

DEMONSTRATIONS can be arranged in London.—For full details write to E.T.S., Ltd., Coplow Park Rd., Braunton, N. Devon. Callers by appointment only. [0210]

"EROICA" RECORDING STUDIOS (Est. 1949).—Recorders (stereo as required) by Ferrograph, series IV, etc., Brenell (Mk. V and the marvellous lightweight Three-Star); pocket 3-way mixer, £3 posted; installations for industry and the home; tape/disc, etc.—Recorder House, Peel St., Eccles, M.C. Eccles 1624. Director, Thurlow Smith, A.R.M.C.M. [0122]

GRAMOPHONE AND SOUND EQUIPMENT—SURPLUS AND SECOND-HAND

ALSO from us, Tape Bargains in L.P and A double-play; Ferrograph and Vortexion 2A models reasonable available.—Sound News, 10, Clifford St., W.1. [0131]

NEW G.E.C., S.T.C. AND "WESTALITE" SELENIUM RECTIFIERS. Largest L.T. range in Gt. Britain. **ONLY Makers' LATEST GOODS supplied NOT Surplus.** S.T.C. HT.K/15 5/-; K8/45 9/4; K8/50 9/10; K8/100 16/8; all post 4d. extra.

BRIDGE CONNECTED FULLWAVE. 17 v. 1 a., 13/4; 1.5 a. 26/6; 3 a., 30/6; 4 a., 38/-; 5 a., 38/6, all post 6d. 33 v. 1 a., 22/9; 1.5 a., 45/-; 3 a. 54/-; 5 a., 68/-; all post 1/6. 54 v. 1 a., 33/-; 1.5 a. 62/-; 2 a. 74/-; 3 a. 74/-; 5 a. 97/-; 72 v. 1 a. 42/-; 1.5 a. 78/-; 2 a. 95/-; 3 a. 95/-; 5 a. 124/-; 100 v. 1 a. 61/-; 1.5 a. 112/-; 2 a. 134/-; 3 a. 134/-; 5 a. 180/-; all post 2/-.

BRIDGE CONNECTED WITH 7 1/2in. SQUARE COOLING FINS. 17 v. 6 a. 53/7; 10 a. 61/-; post 2/6.

BRIDGE CONNECTED HEAVY DUTY FUNNEL COOLED OR 7 1/2in. SQUARE COOLING FINS. Both types, same price. 17 v. 20 a. 120/-; 30 a. 172/-; 50 a. 280/-; 33 v. 6 a. 89/-; 10 a. 102/-; 20 a. 202/6; 54 v. 6 a. 124/-; 10 a. 144/-; 72 v. 6 a. 160/-; 10 a. 186/-; 100 v. 6 a. 227/6; 10 a. 270/-; all post 3/-.

"WESTALITE" (BRIDGE) 12-15 v. D.C. 0.6 a. 12/-; 1.2 a. 30/-; 2 a. 32/6; 5 a. 37/6; 10 a. 64/6; 20 a. 117/6; 30 a. 171/-; 50 a. 278/-; 24 v. 1.2 a. 30/-; 5 a. 60/-; 10 a. 109/6; 20 a. 208/-; 36 v. 1.2 a. 47/6; 5 a. 82/6; 10 a. 154/6; 100 v. 1.2 a. 82/6; 2.5 a. 154/6; 5 a. 195/6; 10 a. 391/-; 170 v. 1.25 a. 135/-; 195 v. 1.25 a. 144/6. All post extra 1/6-3/6 E.H.T. Rects. 14D.134, 25/-; 36 E.H.T. 60 35/10; post 4d. 1 mA. AC/DC meter rect. 14/6.

"SALFORD" (BRIDGE). 6 and 12 v. D.C. 1 a. 7/6; 1.5-2 a. 8/6; 2.5 a. 11/9; 3 a. 14/9; 4.5 a. 16/6; 6 a. 23/6; 10 a. 34/9; 14 a. 42/-; 24 v. 1 a. 12/6; 1.5 a. 14/3; 2 a. 15/6; 3 a. 26/-; 4 a. 29/6; 6 a. 36/6; 10 a. 75/-; other sizes. Post, under £1 add 1/-, over £1 add 1/6. Suitable Transformers from 14V. Post 1/6. Wholesale and Retail

T. W. PEARCE

66 Great Percy Street, London, W.C.1
Off Pentonville Road, Between King's Cross and Anke

GRAMPHONE AND SOUND EQUIPMENT—SURPLUS AND SECOND-HAND

ALSO from us! Post free, insured Gevaert, 1,700ft new L.P. tape, 31/-; 850ft, 22/6; "MI-std., 1,200ft on strong Ferrosools, boxed, 25/-; Ferrograph 3AN and AH dem. models occas. also available.—Sound News, 10 Clifford St., W.1. [0134]

SAVE 30%; the Tape King makes possible the impossible once more Agfa-Wolfen tape 1,800ft. L.P. on 7in. spools, will be 50/-, only 35/-; limited quantity; also tape bargains in sizes from 3in. to 8 1/2in.; many secondhand recorders; all new makes: s.a.e. for list.

ONCE again a few only of the famous E.M.I. Professional Tape Deck at a fractional cost., 7 1/2in. per sec. 7in. spool. Same price as before only 22 gns. or terms.—E. C. G. Kingsley & Co., 132, Tottenham Court Rd., London, W.1. EUS. 5800. [0320]

AERIALS

MAKE your own aerials, save ££££'s. T.V. aerial manufacturer offers do it yourself kits, 50 components include castings, pressings, mouldings, tubes, brackets, can be utilised to make 100 different models, T.V., V.H.F., amateur; brochure gives full illustrations, element dimensions and prices.

THE Richard Maurics Equipment Co., Portsmouth Rd., Cobham, Surrey. Cobham 2339 [8663]

TAPE RECORDING, ETC.

RENDEZVOUS RECORDS offer comprehensive 78/LP tape to disc recording facilities.—Leaflet from 19 Blackfriars St., Manchester, 3. [8168]

TAPE to disc recording: Microgroove LP from 27/6, 78 r.p.m. from 11/-, also 45 r.p.m.; 48-hour service; s.a.e. for comprehensive leaflet to—A. D. Marsh, "Deroy" Sound Service, Little Place, Moss, Delph Lane, Aughton, Ormskirk, Lancs. Aughton Green 3102 [8651]

SOUND Recording in Leeds! Tape/Disc all speeds. Tape Recorder Hire. Studio with full mixing and editing facilities. Call or write for further details: Sound Recording & Equipment Hire, 21, Wade Lane, Leeds 2. Leeds 26192. [0170]

TAPE/DISC/TAPE transfer, editing, copying; if quality and durability matter (especially with LP's from your own tapes); consult Britain's oldest (not cheapest!) full-time transfer service; delivery 2-4 days; at long last we can insure your tape recorder, TV set, gramophone to cover replacement of all components (including valves, tubes); unlimited service calls, free annual check in every part of Britain; state certified date of purchase for quotation.—Sound News, 10, Clifford St., London, W.1. Reg. 2745. [0192]

VALVES

VALVE cartons by return at keen prices; send 1/- for all samples and list.—J. & A. Boxmank, 75a, Godwin St., Bradford 1. [0172]

VALVES WANTED

NEW television or battery midgets, used ones, large quantities each type only; London parcels viewed and collected.—Box 98646 [0656]

NEW valves wanted, any quantity; best cash price by return.—Stan Willetts, 43, Spon Lane, West Bromwich, Staffs. Tel. Wes. 2399 [8547]

ALL types of valves British or American, transmitting and receiving keens; 42s. 6d. prices paid. What have you to offer?—Write or call Lowe Bros., 9a, Diana Place, Euston Rd., N.W.1. Tel. Euston 1636-7 [8494]

WANTED, EXCHANGE, ETC.

WANTED: Damaged Cadenza ribbon mike; state price.—Hartley, 156, New Hall St., Burnley. [8705]

A PROMPT cash offer for your surplus brand new valves, speakers, components, test instruments, etc.—R.H.S., 155, Swan Arcade, Bradford, 1. [0190]

WANTED, all types of communications receivers and test equipment.—Details to R. T. & J. Service, Ashvi & Old Hall, Aswille Rd., London, E.11. Lev. 4986 [0165]

URGENTLY wanted, manuals or instruction books, data, etc. on American or British Army, Navy or Air Force radio and electrical equipment.—Harris, 95, Wardour St., W.1. Gerrard 2504. [8550]

WANTED, BC610 Hallcrafters, ET.4336 transmitters, BC312 receivers, BC221 frequency meters and spare parts for all above; best cash prices.—P.C.A. Radio, Beavor Lane, Hammersmith, W.6 [8563]

WANTED, good quality communication RYS tape recorders, test equipment, domestic radios, record players, amplifiers, valves, components, etc., estab. 18 years.—Call, send or phone Ger. 4638, Miller's Radio, 38a, Newport Court, Leicester Square, W.C.2. [8563]

PROMPT cash for the purchase of surplus stocks of televisions, tape recorders, radios, amplifiers and domestic electrical appliances of every description, substantial funds available.—Spears, 14, Watling St., Budehill, Manchester, Blackfriars 1916. Bankers: Midland Bank, Ltd. [0216]

V.Z. Electrical Service
ANNOUNCE
HI-FI
and
TAPE RECORDER

Service facilities to the Trade and general public. Quick service—estimates free.

METERS

WE CAN SUPPLY WITHIN 7-14 DAYS

a complete range of moving coil—moving iron—electrostatic—thermo-couple—also multirange meters—meggers—pyrometers and laboratory test instruments, etc.

All to B.S.89

Instruments tested and standardised on our premises and replacements supplied from our stock.

REPAIRS

Delivered 7-14 days

Our skilled craftsmen carry out repairs or convert any types and makes of single and multirange meters.

Where desired repairs are accepted on contract.

THE V.Z. ELECTRICAL SERVICE

9, NEWPORT PLACE, LONDON, W.C.2.
Telephone: GERard 4861 (Retail 2613)

AMERICAN 5-FT. DE LUXE MAST SECTIONS, super smooth finish, 2 1/2in. dia., lightweight steel telescopic locking joints to build up any length, 12/6 each. (Cost according to quantity).

AMERICAN 25-FT. HIGH SELF-SUPPORTING TRIPOD BASE AERIAL MASTS, 3-hollow plywood sections 2in. to 4in. dia., complete 95/- (20/-).

AMERICAN 1 1/2in. dia. 35-foot high TUBULAR STEEL MASTS with hinged base and ground pins, in portable canvas hold-all. Ideal for mobile use. 130/- (15/-). **30-H ONE PIECE WOOD POLES,** 4in. dia. throughout, hollow, light, perfectly round and smooth, self supporting. 35/- (special rate).

40-FT. AMERICAN 2in. dia. TUBULAR STEEL SECTIONAL MASTS. With all fittings. Finest quality. £12/10/- (20/-).

AMERICAN PLYWOOD MASTS 8in. dia. 75-ft. High. In 9 sections with all fittings. £35/0/0 (cost). 35-ft. high 2 1/2in. dia. **LIGHTWEIGHT STEEL TUBULAR AERIAL MASTS** with all fittings, £50/0/0 (cost). 150-ft. high 6in. dia. **TUBULAR STEEL SECTIONAL MASTS** with all fittings, for commercial stations, £95/0/0 (cost).

R.C.A. 5-element YAGI ARRAYS. 420 m/cfs. on mounting, 35/- (5/-).

V.H.F. 800 m/cfs. Parrot Cape H DIPOLE ARRAYS on mounts with 45ft. co-ax lead-in. 27/6 (7/6).

MICROWAVE PARABOLOIDS. 48in. dia. on mounts. £12/0/0 (20/-).

ELLIPTICAL REFLECTORS. 18-ft. x 4ft. with horn antennae, £20/0/0 (cost).

AMERICAN POLICE CAR WHIPS as on films. 7ft. long, one piece with mounts, 25/- (5/-).

MILLIAMETERS 2 1/2in. dia., flush round 0/1 moving coil, 20/- (3/6).

Finest Potted American FREED CHOKES, 11H 300 m/cfs, 6in. x 5in. x 4in., 15/- (3/6).

KENYON POTTED TRANSFORMERS, 200/250 v. to 6.3 v. 4s. O.T. 3 times. Finest quality, 4in. x 4in. x 3in., 20/- (3/6).

AMERICAN 230v. RELAYS. D.P. 6 amps, 12/6 (2/6). 6in. Mirror Scale Wood Case Portable D.C. VOLT-METERS. 0/180 moving coil, 20/- (3/6).

HEAVY MORSE KEYS Type D. Enclosed in bakelite cases. 12/6 (2/6).

4in. AMERICAN CAR WHIPS one piece with matching transformer in base precision job, 30/- (5/-).

BENDIX 6in. x 1 1/2in. Totally Enclosed TRANSMITTER CABINETS, £5/0/0 (20/-).

Amounts in brackets are carriage—England and Wales. 40-page list of over 1000 different items available. We have lots of "bits and pieces"—send your requirements. All enquiries answered.

P. HARRIS
ORGANFORD, DORSET

THIS MONTH'S OFFERS

TEST GEAR. BRITISH and AMERICAN, rebuilt, laboratory tested and guaranteed.

"X" BAND. Signal Generator Type TS.13/AP. frequency range 8,400/9,600 Mc/s. incorporating resonant cavity wavemeter, piston attenuator and thermistor bridge, mains operated.

POWER METER. Type TS36/AP accurately measures 3 cm. power with thermistor bridge.

TEST KIT type 25, comprising 3 cm. Directional Couplers, English/American waveguide adapters, etc.

SIGNAL SOURCE. Type TS.45/AP generator 10 mw. or 3 cw. power, mains operated.

ATTENUATORS. "T" type ladder network overall attenuation 80 db., arranged to give steps of 20 db., 20 db., 20 db., 10 db., 5 db., 2 db., 2 db., 1 db. 600 ohms impedance input and output, in metal case with lid. £9/10/-.

"Q" METER. Type TF 329G by Marconi Instruments.

BEAT FREQUENCY OSCILLATOR. Type TF.195L/4 by Marconi Instruments. Frequency range 10 cycles to 150 Kc/s. dual output, low level 1 µV to 100 mV. High Level 2-watts into 50 ohms.

"K" BAND. Transmitter/Receiver complete with 2K33 Klystron and Magnetron.

"X" BAND. Transmitter/Receiver complete Type TR.3699.

WAVEMETERS. Type TS-509-UR Absorption type, 90/400 Mc/s., no battery or mains required. Fitted sealed micro-ammeter reading 0-50 µA. crystal and built-in telescopic aerial, £6/10/-, Carr. 3/6. General Radio type 724 B, 16 Kc/s. to 50 Mc/s. Type TE 149 by R.C.A. 200 Kc/s. to 30 Mc/s. Type 69/AP 300/1,000 Mc/s.

Leslie Dixon & Co.

Dept. A, 214 Queenstown Road, London, S.W.3
Telephone: MACaulay 1159

ENCLOSURES, EQUIPMENT & CABINETS by STAMFORD

Specialty designed Enclosure for Goodmans New Range of Speakers, Axiom 110 & 112 (approved by Messrs. Goodmans). S.49 Enclosure fitted with the Axiom 110 speaker.



8.49

Price £15/15/- or £2/7/6 deposit & 18 monthly payments of 17/1. If fitted with Axiom 112 £3/10/- extra.

EQUIPMENT		Cash Price	Hire Purchase
		£ s d	Deposit 18 Mths
AMPLIFIERS			
Quad II & Pre-amp.		42 0 0	126/ 45/8
Leak TL/12		31 10 0	94/8 34/2
RD Cadet		17 10 0	52/6 19/1
Armstrong		32 0 0	98/ 34/9
Dulc DPA 10		15 19 0	60/ 20/8
Granplan 584		20 0 0	60/ 20/8
STEREO			
Audiomaster		33 15 0	100/ 36/9
Avantic SPA 11		29 8 0	88/6 31/11
Pilot SEP 15		33 12 0	100/ 36/6
Quad 22 Control		25 0 0	75/ 27/2
Leak 20 and Control		51 9 0	154/8 55/8
TUNERS			
Quad FM		28 17 6	87/ 31/4
Armstrong ST 3		27 6 0	82/6 29/7
Chapman FM86		28 17 6	87/ 30/9
Leak Through Line		33 15 0	100/ 36/6
Rogers Powered		24 10 3	72/6 26/8
CHASSIS			
Armstrong Jubilee		29 8 0	88/ 31/10
Armstrong Stereo 44		28 7 0	85/ 30/10
Dulc H4T2 AM/FM		24 19 0	75/ 27/2
SPEAKERS			
Axiote		6 12 2	19/ 7/2
Axiom 300		11 5 9	33/6 14/4
Super 8in. FS/AL		6 19 11	21/ 7/8
Golden 10in. FSB		8 7 3	25/ 9/-
Co Axiol 12in.		25 0 0	75/ 27/3
WB HF 1012		4 15 0	14/3 5/8
MOTORS			
Collaro 4T/200		18 12 0	55/6 20/2
Connoisseur Type B		27 16 1	82/6 30/3
Garrard 4 HF		18 9 9	55/6 20/1
Garrard TA Mk. II		8 10 0	25/6 9/3
Garrard 301		22 7 3	67/ 24/3
Lenco GLS/850		25 8 8	76/ 27/8

WE SPECIALISE IN supplying and fitting any equipment currently available. NO FITTING CHARGE. DEMONSTRATIONS AT OUR WEYMOUTH TERRACE SHOWROOMS



GP57 818/16/-

GP57 Equipment Cabinet for Gram or Tape. Controls, amplifier & record storage. 3ft. Wide, 33in. High, 16in. Deep in choice of veneers and finishes. Price £16/16/- or £2/11/- deposit and 9 monthly payments of 34/-. Full length record storage if required.

Cabinets veneered in oak, walnut and mahogany, finished in shade required. Delivery England and Wales 12/6. Scotland and Northern Ireland 25/-. Satisfaction Guaranteed or Money Refunded.

Write for our illustrated catalogue or visit our Hi-Fidelity showrooms at:
84/88 Weymouth Terrace, off Hackney Road, LONDON, E.2 Telephone: SH0 5008

Showroom hours: Monday-Saturday, 9.30 to 5.30. Late night Wednesday, 7 p.m.
Directions: No. 6 bus from Liverpool Street Station to the Moon, Hackney Road, Walk back two turnings.

A. L. STAMFORD LTD. (DEPT. R.4)

REPAIRS AND SERVICE

RIBBON mikes repaired; guaranteed.—Hartley, 156, New Hall St., Burnley. [8706]

MAINS transformers rewound, new transformers to any specification. **MOTOR** rewinds and complete overhauls; first-class workmanship; fully guaranteed. **F.M. ELECTRIC Co., Ltd.**, Pottery Bldgs., Warser Gate, Nottingham, Est. 1917. Tel. 54898.

LOUDSPEAKERS, electric clocks and shavers repaired promptly. Model Loudspeaker Service. Sonic House, Shipton-on-Cherwell, Oxford.

TRANSFORMERS to any specification. Singles, rewinds, small or large batches; quick and efficient service, competitive prices, estimates by return of post from: **MESSRS. Newman & Son, 1, Grove Crescent, South Woodford, E.18.** [0330]

TRANSFORMERS—Suppliers to B.B.C., I.T.A., and leading radio manufacturers, single or long runs, prompt delivery, home and export, rewinds to all makes. **FORREST (TRANSFORMERS), Ltd.**, Shirley, Solihull, Warwicks. Tel. Shi. 2483. [0128]

WE undertake the manufacture of transformers singly or in quantities to any specification; all work guaranteed for 12 months. **LADBROKE Rewind Service, Ltd.**, 820a, Harrow Rd., London, N.W.10. Tel. Ladbroke 0914. [0222]

RENEW to stock your faulty speakers of all sizes, pressure units, microphones, coils, fields and cone assemblies in cartons.—D. C. Boulton, 134, Thornton Rd., Bradford, 1. Telephone 22838. [0171]

MISCELLANEOUS

HUNDREDS of Paxolin sheets, 7/8x7/8x3/32 in. 1/6. 1ft 1/4x6 3/4x1/4in. 1/6. 6x7 3/4x1/4in. 1/3. 6x7 3/4x1/4in. 9d. Minimum 10/- Trade invited.—Box No. 5149 [8720]

METALWORK, all types cabinets, chassis, racks, etc., to your own specification, capacity available for small milling and capstan work up to 1 1/2 in. **PHILPOT'S METAL WORKS, Ltd.**, Chapman St., Loughborough. [0208]

2500 hard-drawn aluminium television aerial tubes, for disposal at 1/9 each, or per lb, sizes 7/16 in o/d x gauges .032in. .036in. .064in. varying lengths 4ft 6in-2ft 8in.—A. D. Keeling & Co., Ltd., 538, Moseley Rd., Birmingham, 12. Tel. Calthorpe 3537-8-9. [8659]

PAINTS, CELLULOSE, ETC.

PANEL, recognised for many years as the unique one-coat black crackle finish, brush applied, no baking; available by post in 1/2 pint cans at 2/9 from: G. A. Miller, 255, Nether St., London, N.3. [0260]

AGENCIES WANTED

FAR EAST market research and/or representation is offered by Clyde International Ltd.—Box No. 20, Newton, Singapore. [8714]

BUSINESS OPPORTUNITIES

LONDON retail radio, television and electrical business of the highest standing requires Executive Director. Eventual complete take-over of business envisaged on retirement of present Managing Director. Total capital required in the region of £30,000 which can be provided by stages to be agreed. This is an exceptional opportunity to acquire an efficiently operated business established over 30 years which is very highly regarded. The identity of the business will only be disclosed to a bona-fide principal who can satisfy the advertiser as to his suitability and ability to provide the necessary capital. Write in confidence, stating age and details of background and experience.—Box 4907. [8695]

CAPACITY AVAILABLE

ELECTRONIC assembly, wiring, tag boards, prototypes, etc.—Park Television Service Ltd., 96 Horsenden Lane North, Greenford, Wem 8313. [8684]

ELECTRONIC assembly, coil winding and machining, A.I.D. approved.—Bel Sound Products, Marlborough Yard, London, N.19. Tel. Arc. 5078. [0815]

ALUMINIUM chassis, brackets, accessories, A component potting and circuit printing.—Write for catalogue, 25, Leach St., Prestwich, Manchester. [8588]

SITUATIONS VACANT


FEDERAL BROADCASTING CORPORATION OF RHODESIA VACANCIES in Radio Engineering. In this growing organization there are several vacancies for keen young technicians at the transmitters, studios and in the recording branch.

The initial salary will entirely depend on qualifications and experience but will be between £800 and £1,400. There is generous leave, a holiday benefit scheme, and the jobs are pensionable. There is an assisted passages scheme. Applicants should have City and Guilds Intermediate with Radio I (or the equiv.) and sound practical experience on transmitters, studios or in recording. SEND full details of your qualifications and experience to Controller (Administration) P.O. Box 2696, Salisbury, Southern Rhodesia. [8722]



STEREO - TWELVE' CHASSIS

36 GNS

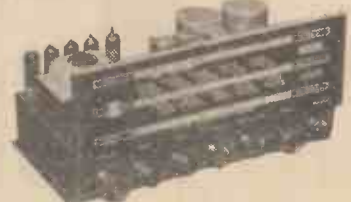


The most complete unit yet produced for stereo giving 6 watts high fidelity push-pull output on each channel, 12 watts total. Full VHF, medium and long wavebands. Stereo and monaural inputs for records, tape and radio and tape outputs for stereo and monaural tape recording. Comprehensive matching for all types of crystal pick-ups. The perfect basis for a complete monaural reproducing system or for a complete stereophonic system now or later.

STEREO 44 CHASSIS 27 GNS



A stereo and monaural chassis providing 8 watts output, 4 watts on each channel, and covering the full VHF and medium wavebands. Stereo and monaural inputs for tape playback and all types of crystal pick-ups and tape outputs for stereo and monaural tape recording. Separate wide range bass and treble ganged con. rolls together with dual volume control for ease of balancing. FM and AM tuners and two separate amplifiers on one compact chassis.

JUBILEE CHASSIS 28 GNS

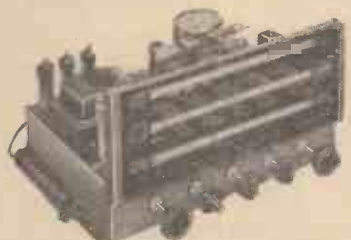

An AM/FM chassis with nine valves and two diodes with push-pull output stage providing 6 watts. Full VHF, medium and long wavebands with automatic frequency control on FM and ferrite aerial on AM. Tape record and playback facilities.

Post this coupon or write for descriptive literature and details of Home Trial facilities, Hire Purchase Terms and Guarantee.

NAME

ADDRESS

..... WOC

ARMSTRONG WIRELESS & TELEVISION CO. LTD.
Warlters Road, London, N.7

Telephone: NORth 3213

DUODE DUODE DUODE DUODE DUODE

The few thousand wise people with the ears and appreciation to choose and enjoy **DUODE SOUND** know that they get a square deal whichever way they look at it. First, **DUODE** gives the most long lasting pleasure in good sound; then for a carefully, individually made job its price is remarkably low; third, we take a personal interest in the problems of **DUODE** owners and are always ready to advise; fourth, there is the unique rejuvenation service for fitting the very latest frame, cone and drive assemblies to older **DUODE** Units and bringing them right up to date at moderate cost.

DUODE is the finest possible long term **GOOD SOUND** investment.

DUODE LTD.

24 Dingwall Road, Croydon, Surrey



NEST OF DRAWERS

Overall size: 7in. wide x 3in. deep x 11in. high. 12 drawers, each measuring 3in. wide x 4 1/2in. deep x 1 1/2in. high. Useful storage for radio components, nuts, bolts and small parts. Sheet steel, green enamelled. 20/- P. & P. 3/-.

RIVETING SYSTEMS LTD.
2 JORDAN STREET,
MANCHESTER 15

you can build a quality TAPE RECORDER

with the 'ASPDEN' Tape Recorder Kits

TAPE DECK KITS

Two models, 5in. or 7in. spools, two speeds, twin track, ferroxcube heads, finest motor, and complete assembly instructions.

Compact model 582 kit £8 5 0
Standard model 782 kit £9 5 0
Assembled and tested 30/- extra.

And the

RECORD/REPLAY AMPLIFIER KIT,
2 1/2 watt, neon indicator, without valves, £5/18.

POWER PACK KIT for above, less valve,
£2/18/6. Carr. extra.

Mr. T. R. S. of Beverly writes:

'I have recently acquired one of your marvellous tape decks, and I feel that I must congratulate you on its excellent construction.'

Send **STAMP** for full particulars to:—

W. S. ASPDEN

Stanley Works, Clevedon Road,
Blackpool, Lancs.

SITUATIONS VACANT

NORTHERN POLYTECHNIC, Holloway, London, N.7.

THE Governing Body invite immediate applications for appointment as full-time Assistant Lecturer (Grade "B") in Telecommunications to teach the City & Guilds of London Institute Telecommunications Technicians Course, the Final Certificate of the City & Guilds of London Institute and the R.T.E.B. Radio & Television Servicing Certificates. Candidates should be Graduates or the equivalent. Industrial and/or teaching experience an advantage. Burnham Scale salary.—Apply for form of application and further particulars to the Clerk to the Governors. [8676]

SENIOR Scientific Officers (a): Scientific Officers (b).

PENSIONABLE posts for men or women in all major scientific fields, including physics, chemistry, mineralogy, biology, forensic sciences, meteorology and mathematics. Age limits: (a) at least 26 and under 31, (b) at least 21 and under 28. Extension for regular Forces Service and Overseas Civil Service. Qualifications: normally first or second class honours degree in science, mathematics or engineering, or equivalent attainment, additionally for (a), at least 3 years' relevant (e.g. post-graduate) experience. London salaries (men): (a) £1,235-£1,460, (b) £655-£1,150; provision for starting pay above minimum. Promotion prospects. Write Civil Service Commission, 17 North Audley Street, London, W.1, for application form, quoting (a) S55/59, (b) S52/58. [8715]

ELECTRONICS Engineer required to work under the direction of the Managing Director on Proto-type and pre-production planning work for Automation.

ENGINEER with good basic A.C. knowledge, with small practical experience, would be considered.

APPLICANT must be prepared to work on own initiative without supervision. Starting salary, according to age and ability with a possibility of rising to £1,000 per annum.

APPLY: Electronics Department, Fringevision Limited, Marlborough, Wilts. [8701]

REPRESENTATIVE with sound technical background required for Public Company selling highest quality radio components to industry.—Box 4938. [8691]

RADIO testers wanted for testing and re-pairing transistor equipment; good wages; 5-day week; modern factory.—Apply J. & A. Margolin, Ltd., 112-6, Old St., London, E.C.1. [8595]

TELEVISION bench and field engineers required at all times for vacancies in most parts of the British Isles; permanent positions with highest salaries plus bonus for suitable applicants, 5 1/2-day week.—Box 1757. [0251]

RADIO engineer wanted for laboratory assistance and technical production control; write or telephone for interview.—J. & A. Margolin, Ltd., 112-6, Old St., London, E.C.1. Clerkenwell 2133. [8586]

TV SERVICE Engineer. Must be driver. Top salary, opportunity for promotion. Expanding dealer central service dept. Best working conditions.—Singer's Radio, 251 Harrow Rd., W.2. Cun 0707. [8711]

JUNIOR Engineers with experience of audio equipment for development work in connection with microphones, loudspeakers, etc., required by well-known manufacturer. Good prospects. Pensionable. Please send full particulars to box 4827. [8687]

TEST Engineers required for work on the final test of radar and navigational equipments. Applicants should preferably be of O.N.C. standard with at least 3 years practical experience in H.M. Forces or industry. Apply Personnel Officer, Decca Radar Ltd., 2, Tolworth Rise, Surbiton, Surrey. [8697]

TESTER required for electronic equipment, experience in radio testing preferable, must be able to read circuit diagrams. Ex R.A.F. or Navy Personnel considered. Apply: The Personnel Officer, The Decca Navigator Co. Ltd., 247 Burlington Road, New Malden, Surrey. [8698]

ELECTRONIC DRAUGHTSMEN required by Scientific Instrument makers for the preparation of development and production drawings. Excellent opportunity for men with sound knowledge of electronic engineering.—Apply in writing to C.15. Hilger & Watts Ltd., 98 St. Pancras Way, N.W.1. [8716]

GRADUATE Physicist or Engineer required for laboratory engaged in the development of magnetic recording. Previous experience an asset but not essential. Good salary will be paid in accordance with qualifications. Apply in writing with details of experience to the General Manager, M.S.S. Recording Co. Ltd., Poyle Trading Estate, Colnbrook, Bucks. [8688]

LONDON Chartered Patent Agents require graduate in electrical engineering for training with a view to qualifying as a Patent Agent; interesting work with good prospects for a professional career. Write giving details of age, qualifications, &c., to Box No. DA899, c/o White's, 72, Fleet Street, London, E.C.4. [8694]

SELENIUM RECTIFIERS

40 ma. to 10 amp., 6 v. to 100 v. Bridge, H. Wave or P.P.

WITH OR WITHOUT HIGH-GRADE TRANSFORMER TO SUIT. These are new goods, best makes, not reconstructed Government surplus. Popular types, 6 v. 1 a., 4/-, 2 a., 7/6, 12 v. 2 a., 8/6, 12 v. 1 a., 7/6, 12 v. 3 a., 15/-, 6 a. alloy-finned type, 27/6, 24 v. 0.3 a., 9/-, 0.6 a., 12/6, 24 v. 1 a., 13/6, 2 a., 15/6, 24 v. 3 a., 21/-, 50 v. 1 a., 24/-, 50 v. 2 a., 42/-, 130 v. 300 ma. h. wave, 38/-, 250 v. 300 ma. do., 65/-, 110 v. 1 a. bdgc., 48/-, 130 v. 80 ma. bdgc., 21/-, Postage 9d. extra each.

CHARGER KITS



No. 1, a kit for 2 v., 6 v., 12 v., 3 amp. transformer, rectifier, ammeter, all high-grade new parts, not rubbish, 52/6, unique convective housing for

same, as illust., 12/6, p.p. 3/-, ditto, but 2 amp., 43/-, case 12/6, p.p. 3/-.

Economy 12 v. 3 amp. kit, no ammeter needed, 34/6, pp. 2/6, all with 12 months' guarantee.

CHAMPION PRODUCTS

43 UPLANDS WAY, LONDON, N.21
Telephone LAB 4457


BRASS, COPPER, DURAL, ALUMINIUM, BRONZE

ROD, BAR, SHEET, TUBE, STRIP, WIRE
3,000 STANDARD STOCK SIZES
No Quantity too Small. List on Application.

H. ROLLET & Co. Ltd.
6 Chesham Place, S.W.1. SLOane 3463
ALSO AT LIVERPOOL, BIRMINGHAM,
MANCHESTER, LEEDS

ODDIE FASTENERS

Pat. 507249

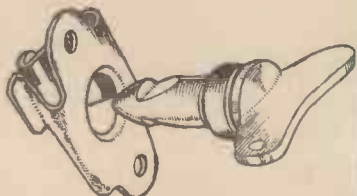

THE FASTENER WITH ENDLESS APPLICATIONS—SIMPLE—POSITIVE SELF-LOCKING. MADE IN A VARIETY OF TYPES AND SIZES. SPECIAL FASTENERS TO SUIT CUSTOMERS' REQUIREMENTS. WIDELY USED IN THE RADIO INDUSTRY

Illustrated brochure and other information will gladly be sent on request
DEPT. "W.W."

Oddie, Bradbury & Cull Ltd., Southampton
Tel. 55883 Cables: Fasteners, Southampton

SOUTHERN RADIO'S
SPECIAL BARGAINS
 SPECIAL OFFER
TRANSMITTER - RECEIVER
 TYPE 38 MK II
 * WALKIE-TALKIE *



Complete in Metal Carrying Case. 9in. x 6 1/2in. x 4in. Weight 6lb. Frequency 7.3 to 9 Mc/s. Five valves, £12/6. Post paid.

These TX-Rs are in NEW CONDITION, but owing to demand they are not tested by us and carry no guarantee, but should prove SERVICEABLE.

ATTACHMENTS for Type "38" Transmitters. ALL BRAND NEW. Headphones 15/6; Throat Microphones 4/6; Junction Boxes 2/6; Aerials, No. 1 2/6; No. 2 5/-; Webbing 4/-; Haversacks 5/-; Valves—A.R.P. 12 4/6; A.T.P.4 3/6; Set of FIVE VALVES 19/- the set.

SPECIAL OFFER No. 2:
 "38," as above, complete with set of external attachments, 42/6, post paid.

SPECIAL OFFER No. 3:
 Transmitter-Receiver "38" Mk. II. Brand new with complete set of external attachments including Webbing, Haversacks and Valves. 57/6 post paid. Fully guaranteed.

CONDENSERS. 100 assorted Mica; Tubular, etc., 15/- NEW.

CONTACTOR TIME SWITCHES. 2 impulses per sec., in case, 11/6.

REMOTE CONTACTOR. For use with above, 7/6.

UBBRA HOLE CUTTERS. Adjustable 1/2in. to 3/4in. For Metal, Plastics, etc., 7/-.

MAGNETS. Strong Bar type, 2 x 1/2in., 1/6 each.

MORSE TAPPERS. Midget type, 2/9; Standard, 1/6; Heavy type on base, 5/6. ALL BRAND NEW.

MORSE PRACTICE SET. TAPPER with BUZZER on base. Complete with battery, 12/6. BRAND NEW.

BACKARD-BELL AMPLIFIERS. Complete. BRAND NEW, with valves, relay, etc., etc., 17/6 each.

QUARTZ CRYSTALS. Types F.T.241 and T.243. 2-pin, 1/2in. spacing. Frequencies between 5,675 kc/s. and 8,650 kc/s. (F.T.243), 20 kc/s and 38.8 Mc/s (F.T.241, 54th Harmonic) 1/- each. ALL BRAND NEW. TWELVE ASSORTED CRYSTALS, 45/-.

Holders for both types 1/- each. Customers ordering 12 crystals can be supplied with lists of frequencies available for their choice.

RECORDING BLANKS. Brand new. "Emisc." Ready for cutting. 13in. 6/- each or 15 complete in metal case 24.

RESISTANCES. 100 assorted useful values. low wire end 12/6. NEW.

SPECIAL OFFER. 12 ASSORTED METERS. Slightly damaged. Mainly broken cases (perfect movements). Including 3 BRAND NEW Aircraft Instruments. 12 for 45/-.

WATCH IDENTIFIERS. Type I A-N Covers with Hemispheres, 5/6.

1154 TRANSMITTERS. Complete in transit case. New condition, £21/5/-.

TEST METERS D.C. PORTABLE 0-5,000 rms 0-6mA 0-1.5v and 3v. In case 3 1/2in. x 3 1/2in. x 2 1/2in. Voltage range can easily be extended by addition of resistance to suit individual requirements. Brand new 12/6

ATTACHMENTS for "18" Transmitters. LL BRAND NEW. Headphones 15/6; Hand Microphone 12/6; Aerials 5/-; Set of 6 Valves 1/-.

RANSAPENT MAP CASES. Plastic 10in. x 10 1/2in. Ideal for Maps, Display, etc., 5/6. Set or carr. extra. Full list Radio Books, etc., 3d.

SOUTHERN RADIO SUPPLY, LTD.
 11, LITTLE NEWPORT STREET,
 LONDON, W.C.2. GERRARD 6653

SITUATIONS VACANT

ENGINEERS with some five years practical experience of radio frequency design work required for interesting new project in Laboratory situated in South West outskirts of London. Some experience of cables an advantage. Pension Scheme. Write giving full particulars of experience and salary required to Box No. 5078. [8711]

ELECTRONICS; circuit development and design engineers required for work on audio frequency amplifiers and associated equipment; qualifications, H.N.C. plus recent experience in Hi-Fi, P.A. or vibration field; progressive posts in pleasant working conditions. Pamphonic Reproducers Ltd., Dalston Gardens, Stanmore, Middlesex. Wordsworth 0226. [8583]

RADIO testers, men with experience of fault-finding on telecommunication and allied equipment are invited to apply for this interesting and progressive position.—Write with details of experience and qualifications to Personnel Officer, British Communications Corporation, Ltd., Exhibition Grounds, Wembley, Middx. Wembley 1212. [0243]

TELEVISION. First-class outside engineer required for Cardiff district. Very large dealers, operating good Service Dept. Offer of permanent job with excellent wages and the use of a very good house. This is a very good opportunity to the right man, but only experienced engineers will be considered. Please give full particulars to Victor Freed (Cardiff) Ltd., 6 Duke St., Cardiff. [8682]

RADIO Technicians required by International Aeradio Ltd., for overseas service. Permanent and pensionable posts. Normally tax-free, inclusive salary in local currency varying with location, and additional marriage and child differentials. U.K. leave, free air passages and insurance. Kit allowance. Qualified candidates to whom replies will be sent write to Personnel Officer, 40, Park St., W.1. [0262]

RANK Precision Industries Ltd. require a Laboratory Assistant with good theoretical knowledge and practical experience of amplifiers and magnetic recording equipment for professional use. Pension scheme. Staff canteen.—Apply in writing stating age, qualifications, experience and salary required to Personnel Officer, Woodger Road, Shepherds Bush, London W.12. [8721]

ASSISTANT for High Temperature Technology Laboratories. Vacancy in junior range £450x25—£700 or senior range £750x25—£1,000.—Particulars of previous experience which should include electronic or high temperature work, age and present salary, to Professor A. R. Ubbelohde, F.R.S., Department of Chemical Engineering, Imperial College of Science and Technology, London, S.W.7. [8719]

UNIVERSITY COLLEGE, London (Gower St., W.C.1) has vacancy for Senior Electronics Technician for research and development work in speech communication in Department of Phonetics. Interest in acoustics and ability to work independently an advantage. Salary up to £760 p.a. depending on experience and qualifications. Application forms from the Secretary, quoting Phonetics/1. [8690]

SENIOR and Junior Engineers are required to join a team working on a number of interesting projects involving the application of transistors to electronic control and instrumentation and to advanced type of TV studio equipment. Experience with pulse and digital techniques and some knowledge of transistor circuit engineering is expected of applicants for the senior positions.

THE posts offer exceptional opportunities in a rapidly growing organization.

APPLICATIONS giving full particulars and quoting Ref. G.6145 to:—Personnel Manager, Ferguson Radio Corporation Ltd., Gt. Cambridge Road, Enfield, Middlesex. [8707]

ELECTRONIC Engineers required for semiconductor applications laboratory and quality control department. Applicants should be of degree standard and have at least two years experience in semiconductor practice. Excellent prospects with an expanding company. South coast area. Salary according to age and experience. Apply in writing to Chief Engineer, Brush Crystal Co. Ltd., Hythe, Southampton. [8709]

RADIO Technician/Sales required by Free-town Cold Storage Co. Ltd., Sierra Leone. Sole Agents for Philips. 22 to 25 years, single. Must have had experience sales, servicing, ordering and correspondence. Ability to work on own initiative. Permanent position is offered with good salary scale and incentive bonus. Free fully furnished quarters. Passage paid. 21-24 months tour. Generous U.K. leave on full salary. Full details to Mr. M. R. Diethelm, 4 Chepstow Street, Manchester 1. [8700]

UNILEVER require at their London Headquarters draughtsmen to assist in design work associated with the introduction of advanced manufacturing and data processing techniques. Applicants, who should be between the ages of 25 and 35, must have had at least three years' experience in the electronic or light engineering industry and must have O.N.C. or equivalent qualifications. Applications, giving details of training, qualifications and experience, should be addressed to Head Office, Staff Department (WF43), Unilever House, Blackfriars, London, E.C.4. [8661]



THRILLING PERFORMANCE



Certain conductors can extract from an orchestra the most thrilling and exciting performances, making others seem lifeless and uninteresting. The same can be said for a Massicore output transformer. With a good amplifier and other equipment it can bring to life such performances that will thrill in a way you may not have experienced before.

MASSICORE
SAVAGE
TRANSFORMERS LTD.

NURSTEED ROAD
DEVIZES, WILTSHIRE
 Telephone: Devizes 932

TRANSISTORS THEORY AND PRACTICE

This remarkable book sold over 30,000 copies since it was first published. Engineers, technicians, and experimenters everywhere have hailed it as the best practical book on transistors ever written. Now the author has completely rewritten it. He takes in all the new developments, including thyratrons, four-layer diodes, spacifiers and photocouplers.

By R. P. Turner

23/- Postage 3d.

MICROWAVE DATA TABLES by A. E. Booth. 27/6. Postage 1/-.

PRINCIPLES OF FREQUENCY MODULATION by B. S. Camies. 21/- Postage 1/-.

BRITISH TRANSISTOR MANUAL by E. N. Bradley. 12/6. Postage 8d.

TELEVISION SERVICING HANDBOOK by G. J. King. 30/- Postage 1/3.

THE CATHODE-RAY TUBE AND ITS APPLICATIONS by G. Parr and O. H. Davie. 50/- Postage 1/3.

RADIO VALVE DATA. Compiled by "WVV", 6th Ed. 5/- Postage 9d.

MULLARD CIRCUITS FOR AUDIO AMPLIFIERS. 8/6. Postage 9d.

Complete catalogue 6d.

THE MODERN BOOK CO. 19-23 PRAED STREET LONDON, W.2

BRITAIN'S LARGEST STOCKISTS OF
BRITISH AND AMERICAN TECHNICAL
BOOKS

PADDINGTON 4185. Open 6 days 9-6 p.m.

A. D. LOUDSPEAKER ENCLOSURES AVIES FOR

GOODMANS WESTREX WHARFEDALE
JENSEN G.E.C. W.B. B.T.H. B.B.C.

AMPLIFIER CONSOLE CABINETS
QUALITY AMPLIFIERS CHASSIS
LOUDSPEAKERS LP RECORDS

YOU CAN SEE YOUR CABINET BEING MADE IN
OUR WORKSHOPS

Demonstrations Without Appointment Open till 5.30 Saturdays

A. DAVIES & CO. (Cabinet Makers)

3 PARKHILL PLACE (off Parkhill Road),
LONDON, N.W.3. GULLIVER 5775

Few minutes walk Belsize Park Underground

RADIO & ELECTRONIC ENGINEERS . . .

The MORSE CODE is still, and always will be, the basic Code for individual Signalling, whether on visual or telecommunication circuits. So add this simple and interesting subject to your qualifications. Apart from the pleasure derived from this extra knowledge, it counts for much when a step up the ladder is under consideration. Write for the **CANDLER BOOK OF FACTS** and see for yourself how fascinating the Candler method of teaching the Morse Code will prove.

CANDLER SYSTEM CO.
(56W) 52B ABINGDON ROAD, LONDON, W.8
Candler System Co., Denver, Colorado, U.S.A.

SITUATIONS VACANT
TEST engineers; applications are invited from senior test engineers with previous industrial experience of testing radio communications, receivers and transmitters; successful applicants will be offered positions on the company's permanent staff, starting salaries commensurate with qualifications and experience.—Apply in writing, giving full details, to Personnel Officer, Redifon, Ltd., Broomhill Rd., S.W.18. [0024]

TV/RADIO field or bench service engineers required immediately; experience essential, must be capable of maintaining high standard of service to the public excellent working conditions; loyalty and enthusiasm will be rewarded with permanent position and a salary in the range of £700 to £950 p.a. Apply for interview, The Secretary, Leytonia Radio Ltd., 784-B High Rd., Leyton, E.10. Telephone LEV 1396.

MULLARD Southampton Works require an Electronics Engineer to work on the design of high speed automatic test equipment. Some experience in this field would be useful, but is not essential and applications for this vacancy are invited from Engineers of Degree or H.N.C. standard. The Company's conditions of employment will be found to be attractive and interested candidates are invited to apply in writing to the Plant Personnel Officer, Mullard Southampton Works, Millbrook Industrial Estate, Southampton. [8708]

MECHANICAL, electrical and heating and ventilating engineering draughtsmen; pensionable posts for men and women aged at least 20 on 1.6.59 with at least 3 years' training, including adequate practical experience with appropriate technical study; appropriate O.N.C. is essential, and at least one year must have been spent in full-time drawing office work; men's starting salary (London) £54/2/0 (20) to £78/5 (28 or over); scale maximum £900; promotion prospects.—Write Civil Service Commission, 17, North Audley St., London, W.1., for application form, quoting S68-69/59. [8656]

UNIVERSITY OF SOUTHAMPTON, Department of Aeronautical Engineering. A vacancy exists for an Electronics Technician (un-established). The salary offered is in the range £530 to £610, dependent upon qualifications. Candidates should have experience of circuit lay-out and wiring techniques and familiarity with d.c. amplifiers, strain gauge bridges and computer techniques will be an advantage. There is a possibility of establishment in due course for a suitable candidate. Applications addressed to the Professor of Aeronautical Engineering and marked "Electronics Technician" on the envelope should be forwarded within fourteen days of the appearance of this advertisement. [8704]

MINISTRY OF TRANSPORT AND CIVIL AVIATION: requires Electrical Engineers (Assistant Signals Officers for Aviation) telecommunications and electronic navigational aids. Minimum age 23, 1st or 2nd Class degree in Physics or Engineering, or A.M.I.E.E. or A.F.R.Ae.S. (candidates with Parts I, II & III of A.M.I.E.E. or Parts I and II of A.F.R.Ae.S. or equivalent, or of very high professional attainment without these qualifications considered). Salary £665 (age 23) to £1,085 (age 34) maximum £1,250. Slightly lower outside London and for women. 5 day week. Further details and forms from M.L.N.S., Technical and Scientific Register (K), 26 King Street, London, S.W.1. quoting D.70/9A.

MINISTRY OF SUPPLY requires technicians in its Air Technical Publications Branch at Chessington, Surrey, for the preparation of technical publications for the Services on aircraft instruments, including flight, control and navigation systems, aircraft electrical equipment and systems, electro-mechanical equipment; qualifications: recognised engineering apprenticeship or equiv. training in an appropriate trade, and experience of writing or editing technical matter; sound and up-to-date knowledge of the relevant field is essential; air crew experience an advantage for certain posts; O.N.C., C. & G. Final Certificates, or equiv. desirable; salary £900 (age 30)—£1,065 p.a.—Application forms from Manager (F.E. 1982) M.O.L. & N.S., Professional & Executive Register, Atlantic House, Farringdon St., London, E.C.4. [8657]

SPACE Research (a) Senior Experimental Officer (Min. age 35); and (b) Experimental Officer (Min. age 27) to work under auspices of Royal Society on assembly, installation and testing of space research instruments at R.A.E. Farnborough for use in upper atmosphere research rocket Skylark. Senior post duties involve close co-operation with physicists working in British Universities on space research problems and offer interesting practice in this field. Quails H.N.C. H.S.C. G.O.E. (A.L.) pass degree or equiv. For (a) some experience of transistor techniques essential. Experience of missiles and/or telemetry systems an advantage, with good practical knowledge of light electrical engineering and electronic practice, in particular power supply systems for electronic devices. For (b) good practical knowledge of construction of airborne electronic and electric assemblies with experience in any of following fields: guided weapon guidance and control systems, telemetry, flight instrumentation, airborne radar and radar systems. Salary ranges (a) £1,315-£1,560 (b) £954-£1,166. Forms from M.L.N.S., Technical and Scientific Register (K), 26, King St., London, S.W.1, quoting D 481/9A. [8892]

LONDON CENTRAL RADIO STORES

20 WAY PRESS BUTTON INTERCOM. TELEPHONES in Bakelite case, with junction box. In good working order. 48/10/-
CENTRE ZERO mA. METER. 1-0-1. Suitable for tuning indicator or galvo. Resistance 75 ohm. Panel mounting overall dimension 3in. 25/- new and boxed.
FLUXMETERS MODEL WY0023. Calibrated in three ranges, 500-1,000, 1,000-2,000 and 2,000-4,000 gauss. Direct reading. Complete with polarity indicator and probe for minimum gap of 1/4in. Brand new in portable wood case with carrying handle. 12 x 9 x 6 1/2in., less battery. 42/5/- inclusive.
AVO UNIVERSAL TEST METERS. Reconditioned as new. In perfect working order. Model 40 £10/10/- Model Z £9/9/-

3 1/2in. P.M. SPEAKER 30 in grey metal cabinet complete with volume control. Very sensitive. Approx. measurements 5 1/2 x 5 1/2 x 2 1/2in. Approx. weight 2 1/2lb. 25/-

HIGH-SPEED ELECTRO-MAGNETIC COUNTERS. Ex Govt. 0-9,999, 25/50 v. D.C. Size 4 x 1 x 1 1/2in. Single coil 2,300 Ω or single coil 500 Ω. 18/6

VENNER TIME SWITCHES, for switching on/off lighting and power. Reconditioned as new. In iron clad case. 10 amp., 75/-; 15 amp., 85/-; 20 amp., £5/5/-

TELEPHONE DIALS. 0-9. Suitable for Inter-office and factory installations. With fixing mount, fitted with connecting tags. 21/-

3-OHM P.M. SPEAKERS. In good working order. 10in. 27/6; 8in. 9/6; 6in. 9/6; 5in. 11/6

ELECTRICITY SLOT METERS (1/- in slot) for A.C. mains. Fixed tariff to your requirements. Suitable for hotels, etc. 10 A., 5/-; 15 A., 9/6; 20 A., 10/4/- Other amperages available. Reconditioned as new.

QUARTERLY ELECTRIC CHECK METERS. Reconditioned as new. 10 A. 42/6, 15 A. 52/6, 20 A. 57/6. Other amperages available.

BALANCED ARMATURE HEADPHONES. Suitable for crystal sets 12/6

LIGHT WEIGHT HEADPHONES. Low resistance 400 ohm each earpiece. 12/6

VENNER 8-DAY CLOCKWORK TIME SWITCHES. 230 volts 1 amp., 3 1/2 x 2 1/2in., with key and connecting socket, 27/6

MOVING COIL HAND MIKE. Type 7. 7/6

All prices include carriage

23 LISLE ST. (GER.2969) LONDON, W.C.2

Closed Thursday 1 p.m. Open all day Saturday

METER REPAIRS



All makes of Single and Multi-range instruments repaired and recalibrated.

- ★ Prompt Service
- ★ All work guaranteed
- ★ Priority for urgent orders.

Competitive prices for repairs to all types of instruments. Contracts a speciality. New meters supplied from stock (2" to 6") and complete equipment manufactured to specification.

Call, write or phone for details to:

E.I.R INSTRUMENTS LIMITED
329 Kilburn Lane, London W.9. Tel: LAD 4168

PROVED

The finest method
for cleaning records
Already over 200,000 enthusiastic users

THE "Dust Bug"
AUTOMATIC GRAMPHONE RECORD CLEANER

PATENT APPLIED FOR

Price reduced to 17/6 (plus 5/10 purchase tax)

from your local dealer or

Cecil E. Watts Ltd.

Consultants and Engineer (Sound Recording and Reproduction)
Darby House, SUNBURY-on-THAMES, MIDD



**TRANSISTOR
AUDIO AMPLIFIERS**

250 mW Class B push-pull using GET114 transistors, operating from a 6V supply. Class B single-ended push-pull (Transformerless) using GET114 transistors, operating from a 9V supply.

300 mW Class B push-pull using GET114 transistors operating from a 6V supply. Class B single-ended push-pull (transformerless) using GET114 transistors, operating from a 9V supply.

1 W Class B push-pull using GET114 transistors, operating from a 6V supply. Class B single-ended push-pull (transformerless) using GET114 transistors, operating from a 12V supply.

2 W Class B push-pull using GET116 transistors, operating from a 12V supply.

3 W Class B single-ended push-pull (transformerless) using GET115 transistors (mounted on 3" x 3" fins) operating from a 12V supply.

These are a selection from the range of audio amplifier circuits using G.E.C. transistors. For details of any of these circuits or information on the wide range of G.E.C. transistors, please write to:

G.E.C. SEMICONDUCTOR DIVISION,
1001 Street, Hazel Grove,
CROOKPORT, CHESHIRE.

SITUATIONS VACANT

MINISTRY OF SUPPLY, Royal Aircraft Establishment, Bedford, require experienced Electrical Electronic Leading Draughtsman for instrumentation work in wind tunnels. Must have served an appropriate apprenticeship and possess the H.N.C. (Elec.). Salary £845-£995. Five-day week of 44 hours (including meal breaks). Paid sick leave, 18 days holiday plus public holidays. Opportunities for promotion and to become pensionable. House available within reasonable time for candidate appointed if married and not resident in district. Applications stating age, quals, and exp. to Ministry of Supply, Est. 3.R.1., Room 517, Adelphi, Strand, London, W.C.2. or any Employment Exchange quoting Order Number Bedford 291. [8689]

AIR MINISTRY have vacancies for civilian Radio Technicians at Royal Air Force Sealand, Cheshire, and at certain other R.A.F. Stations throughout the United Kingdom for the servicing, repair, modification and testing of air and ground radio and radar equipment. Commencing salary (national) (according to age) is £525-£670 p.a. Max. salary £795 p.a. Rates are subject to small deduction at certain provincial stations and to a small increase in London. Annual leave 3 weeks 3 days increasing to 4 weeks after 3 years service. A limited number of houses may be available for renting at Sealand. These houses are at West Kirby some 15 miles distant. Apply, giving details of quals, and exp. and mentioning this advertisement direct to the Commanding Officer No. 30 Maintenance Unit Royal Air Force Sealand, or to Air Ministry C.E.4b, Cornwall House, Waterloo Road, London, S.E.1. for vacancies in other areas. [0233]

TECHNICAL TRAINING

LEARN Radio and Electronics the New Practical Way! Very latest system of experimenting with and building radio apparatus—"as you learn."—Free brochure from Dept. W.W.10 Radiostructor, 46, Market Place, Reading, Berks. [0241]

CITY & GUILDS (electrical, etc.) on "No Pass—No Fee" terms; over 95% successes. —For details of modern courses in all branches of electrical engineering, applied electronics, automation, etc., send for our 148-page Handbook—free and post free.—B.I.E.T. (Dept. 388A), 29, Wright's Lane, London, W.8. [0017]

TUITION

FULL-TIME courses for P.M.G. Certificates, C.G.L.I., Telecommunications and Radar Maintenance Certificates—Information from College of Technology, Hull. [0111]

WIRELESS.—See the world as a radio officer in the Merchant Navy; short training period, low fees, scholarships, etc., available. boarding and day students' stamp for prospectus.—Wireless College, Colwyn Bay. [0018]

A.M.I.Mech.E., A.M.Brit.I.R.E., City & Guilds, G.C.E., etc. bring high pay and security; "No Pass—No Fee" terms; over 95% successes.—For details of exams and courses in all branches of engineering, building, electronics, etc., write for 148-page Handbook—free.—B.I.E.T. (Dept. 387B), 29, Wright's Lane, London, W.8. [0118]

"HOW and Why" of Radio and Electronics made easy by a new, no-maths, Practical Way. Postal instructions based on hosts of experiments and equipment building carried out at home. New courses bring enjoyment as well as knowledge of this fascinating subject.—Free brochure from Dept. W.W.12 Radiostructor, 46, Market Place, Reading, Berks. [0240]

T.V. and Radio—A.M.Brit.I.R.E., City and Guilds, R.T.E.B., Cert., etc., on "No Pass—No Fee" terms; over 95% successes.—For details of exams, and home training courses (including practical apparatus) in all branches of radio T.V. and electronics, write for 148-page Handbook—free.—B.I.E.T. (Dept. 397A), 29, Wright's Lane, London, W.8. [0016]

ALL EXAMINATIONS easier to pass by I.C.S. home study methods. A.M.Brit.I.R.E., C. & G. Telecoms, P.M.G. Cert. in Wireless Telegraphy, Radio & TV Servicing, etc.—Write for FREE Prospectus, International Correspondence Schools, Intertext House, Parkgate Road (Dept. 442A), London, S.W.11 [0033]

LEARN-AS-YOU-BUILD course in basis radio, electronic & electrical theory with practical training building a 4-valve TRF and a 6-valve superhet radio receiver. Signal Generator and High-quality Multimeter.—Write for FREE book International Correspondence Schools, Intertext House, Parkgate Road (Dept. 442), London, S.W.11. [0358]

INCORPORATED Practical Radio Engineers home study courses of radio and TV engineering are recognised by the trade as outstanding and authoritative; moderate fees to a limited number of students only; syllabus of instructional text is free; the Practical Radio Engineer journal, sample only 2/-; 6,000 alignment peaks for superhets, 5/9, membership and entry conditions booklet 1/- all post free, from the Secretary, I.P.R.E., 20, Fairfield Rd., London, N.8. [0088]

BOOKS WANTED

WANTED. Loose issues or bound volume of Wireless World, volume 65, dated January to December, 1957.—Box No. 5122. [8718]

GILSON U.L. OUTPUT TRANSFORMERS

WIDE FREQUENCY RANGE—LOW DISTORTION AT ALL POWER LEVELS

— HIGH FIDELITY —

MAXIMUM RELIABILITY
LOW COST

MULLARD 10 WATT AMPLIFIER WO 892

8KΩA-A 43% Taps
3.7-8-15Ω secs.

Universal Mounting.
Shrouded.

Price 62/6



WO893 for "BAXENDALL" 5 WATT AMPLIFIER

Upright mounting—Tags on Coil to author's specification.

Price 36/-

UPRIGHT MOUNTING GEC

88/50 AMPLIFIER

WO 866/37/597



6.6KΩA-A 43% Tap
5KA-A 43% Taps.
0 Watt-50 Watt
For EL34s, For KT88s
For KT66s.

Price 112/6

INVERTED MOUNTING

MULLARD 20 WATT AMPLIFIER

WO1546/37

6.6KΩA-A 43% Taps
7KΩA-A 20% Taps
1-3.7-8-15Ω Secs, or
3.7-15-30-60Ω Secs.

Price 92/6



WO 1526, 4.5KΩA 20% Taps, 100watt, 100V sec
WO 1540, 2.5KΩA-A 43% Taps, 100watt, 100Vsec

Price 157/6

R. F. GILSON LTD. Phone WIM 5695

11a ST. GEORGE'S RD., WIMBLEDON, S.W.19

TRANSFORMERS FOR ENGINEERS, TECHNICIANS
SCIENTISTS

TROPICAL - LIGHTING - NEON - SPECIAL PURPOSE

SOLDERING EQUIPMENT BY



PRECISION SOLDERING INSTRUMENTS for the ELECTRONICS INDUSTRY

- Comprehensive range
- Robust and Reliable
- Light weight
- Rapid heating
- Bit sizes 3/32in. to 3/8in
- 'PERMABIT' or Copper bits
- All voltage ranges 6/7v. to 230/250v.
- Prices from 19/6

Illustrated is the 25w 3/16in replaceable bit model with safety shield.

British and Foreign Patents. Registered designs. Suppliers to H.M. and Foreign Governments. Agents throughout the world. Brochure No. S.5 sent free on request.

Sole proprietors and manufacturers:
LIGHT SOLDERING DEVELOPMENTS LTD.
 28 Sydenham Road, Croydon, Surrey
 Phone: CROydon 8589 Grams: Litesold Croydon

BUSINESS & PROPERTY

MEDIUM size property company, situated in the West of England, is desirous of negotiations with large Public or Private Company with a view to being a subsidiary of same, or suggestions; present factory space, 18,000 sq ft, owned by the company, freehold, modern building. **FACILITIES** for plastic injection moulding, aluminium alloy die casting, tool room facilities, large storage space, room for further expansion. **PRESENT turnover**, £75,000 per annum. Enquiries welcomed from principals only.—Box 4368. [8627]

BOOKS, INSTRUCTIONS, ETC.

CATALOGUE No. 14 Government surplus and model radio control, over 500 illustrated items, 2/- (refunded on purchase), p.p. 6d.—Arthur Sallis Radio Control Ltd., 35 (C), North Road, Brighton. [0193]
BOOKS for C. and G. exams; Telecom Principles, A and B, 9/6; Telecoms (Principles), 1 and 2, 10/6; Maths. for Tels., 1, 7/-; Maths. for Tels., 2, 5/-; all post free.—Riddiford, 384, Tilehurst Rd., Reading, Berks. [8652]

INSTRUMENT REPAIRS

DON'T WAIT. TAKE ADVANTAGE OF OUR QUICK SERVICE, COMPETITIVE PRICES AND GUARANTEED REPAIRS.

We specialise in the repair and conversion of the following:-
MULTI-RANGE METERS, AMP-VOLT-WATTMETERS, ELECTRONIC AND ALL ALLIED MEASURING EQUIPMENT, SPC. LABORATORY EQUIPMENT, LEDON INSTRUMENTS LTD.
 96, Deptford High St., London, S.E.8. TIDEWAY 2689.

STEREOSOUND SW. AMPLIFIERS. In polished cabinet 14½ x 6 x 8ins. Weight 15lb. 12 months' guarantee. 15 Gns. P.P. **12v. DC MAGNETIC SWITCH.** Cuts out on 2 amp. overload or dead short. 13/8. P.P. **U.S. ARMY SIGNAL GENERATOR TYPE 222-A.** 8-15 and 150-230 mc/s. \$21. P.P. These are precision instruments. **FAMOUS MAKE LIGHTWEIGHT PENCIL BIT SOLDERING IRON,** 220/240 v. 25 w. Indicator light in handle (list price 24/6). Price 16/6. P.P. **SCOOTER BATTERIES.** 6 v. 10 A.H. Hard rubber case. Size 5 x 5 x 1½in. Weight 3lb. 15/-. P.P. Also ideal for model use. **NEW AND BOXED COLLARO CONQUEST 4-8PEED RECORD AUTO CHANGERS.** 200/250 v. A.C. \$6/19/6. Carriage 5/-. **OUR FAMOUS TRANSFORMERS.** Input 200/250. Output tapped 8 to 30 v. 2 a. or tapped 5, 11, 17 v. 5 a. Each 24/6. P.P. **F.W. METAL RECTIFIERS.** 12/6 volt, 1 a., 7/6; 3 a., 13/-; 4 a., 17/6; 6 a., 27/6; P.P. **STUDIO "O" P/U CARTRIDGES 21/- P.P.** **FLAT TYPE H.W. RECTIFIERS.** 250v. 25ma/4 7/6. 60ma/4, 7/6. 300ma/4, 24/-. All P.P. Most other types stocked.

All items new and guaranteed
RELAYS. We hold large stocks. Any contact combination and operating coil voltage supplied from 3/-.
KEY SWITCHES from 3/-.
TOGGLE SWITCHES DPDT 3/6.
MICRO SWITCHES Make and Break 5/6.
MAINS TRANSFORMER AND RECTIFIER giving 12v. 1a. D.C. Output 19/8 P.P.
NICKEL NIFE BATTERIES. 1.2 volt. 2.5 amp. Size 3 x 2½ x 1½in. 6/- or 3 for 18/- P.P.
ARMY MORSE KEYS. 2/8. P.P.
LIGHT WEIGHT H.R. PHONES. 17/6.
H.S. TWIST DRILLS. Set 7. ½-in. 3/8.
LISTS SENT ON REQUEST
 Post orders only to

RADIO & ELECTRICAL MART
 29 STATION APPROACH, SUDBURY TOWN, WEMBLEY, MIDDIX.

LOCKWOOD

ENCLOSURES

Used by every Broadcasting & Television Authority in the British Isles and Eire for High Quality Monitoring.

LOCKWOOD & CO. (Woodworkers) LTD.
 LOWLANDS ROAD, HARROW, MIDDIX.

JEFFERY TRANSFORMER Co.

**SOLENOIDS · RELAY COILS
 METAL RECTIFIERS**

199 Edward Street, New Cross
 LONDON, S.E.14
 TIDeway 4458

VORTEXION TAPE RECORDERS

P.A. Equipment. Personal Recorders etc.
 Tape to Tape/Disc. Service

SALE OR HIRE

Griffiths Hansen (Recordings) Ltd.
 24/25, Foley Street, London, W.1. MUScum 2771

LYONS RADIO LTD.

BEAT FREQUENCY OSCILLATORS. These instruments by Furzehill Laboratories have a continuously variable frequency range from 0 to 10,000 cycles, with separate 50 cycle check and set zero control. Output impedance 10 or 600 ohms monitored by a two range 0/5 and 0/50 voltmeter. Operate from 100/120 v. or 200/250 v. 50 cps. A.C. mains. In good condition and working order. **PRICE ONLY 29/10/-, carriage 10/-.**
UNIVERSAL MEASURING BRIDGES. Ex Govt., by Mullards, measure: 0.1 ohms to 10 megohms and 10 pf. to 10 mfd. Can also be used to calculate power factor, for percentage tolerance measurement and, with the use of external standards, for the measurement of inductance. Operate from 100 to 200 v. A.C. mains. Supplied in good condition and working order with operating instructions.

SWITCHES. Bulgin pattern, ex equipment, single hole fixing. Single pole 250 v. 3 A.: 6 for 5/6, doz. for 9/8. Double pole: 250 v. 1 A.: 6 for 7/-, doz. for 11/6. Double pole change-over 250 v. 1 A., with slotted dolly (brand new condition): 3 for 6/6, 6 for 11/-, doz. for 20/-. Substantial reductions for orders of 50 and more.
IN STOCK. Power Packs for No. 19 sets. Receivers type RL155A, RL155N, R208, Medium and V.H.F. Signal Generators. One only Dictaphone with double recording head. Power Units designed for mains operation of such installations as the SCB522, TR1480, etc. Call if you can or further details on receipt of S.A.E.

3 GOLDHAWK ROAD (Dept. M.W.),
 SHEPHERD'S BUSH, LONDON, W.12
 Telephone: Shepherd's Bush 1729

COPPER WIRE

ENAMELLED, TINNED, LITZ,
 COTTON AND SILK COVERED

RESISTANCE WIRES

EUREKA - CONSTANTAN

Most Gauges Available

NICKEL-CHROME - MANGANIN

SMALL ORDERS PROMPTLY DESPATCHED

B.A. SCREWS, NUTS, WASHERS,
 soldering tags, eyelets and rivets,
 EBONITE and BAKELITE PANELS.
 TUFNOL ROD, PAXOLIN TYPE COIL
 FORMERS AND TUBES, ALL DIAMETERS.

SEND STAMP FOR LIST. TRADE SUPPLIED

POST RADIO SUPPLIES

33 Bourne Gardens, London, E.4
 Phone: CLIssold 4688

NEW BOOKS ON RADIO & TELEVISION

The A.R.R.L. Radio Amateurs Handbook. 1959 edition. Postage 1/9 32/6
Principles of Transistor Circuits, by Amos. Postage 1/- 21/-
Miniature Portable Oscilloscope, by Bernards Manuals. Postage 6d. 2/6
Practical Stereo Handbook, by Sinclair. Postage 6d. 3/6
Practical Transistor Receivers, Book 1, by Sinclair. Postage 6d. 5/-
The Electronic Engineers Reference Book, by Hughes. Postage 3/- 84/-
British Transistor Manual, by Bradley. Postage 1/- 12/6
How to get the best out of your Tape Recorder, by Guy. Postage 9d. 8/6
T.V. Fault Finding, by Radio Constructor. Postage 6d. 5/-
Radio Valve Data, by "Wireless World." Postage 8d. 5/-
Radio Engineering Formulae and Calculations, by Pannett. Postage 9d. 17/6
Tape Recording as a Pastime, by Arnison and Gardner. Postage 1/- 15/-

UNIVERSAL BOOK CO.
 12 LITTLE NEWPORT STREET
 LONDON, W.C.2 (adjoining Lisle Street)

**TELEPRINTERS,
PERFORATORS,
REPERFORATORS,
TAPE READERS**

Terminals and V.F. Telegraph multi-channel units; Testing Equipment Telephone Carriers and Repeaters: Signalling Rectifiers and Relays, Transformers Transmit and Receive, Filters; Repeating and Retardation Coils; Racks, Relay Bases, Uniselectors, Remote Control Transmitters, British, American, Italian and German Equipment.
**Batey & Co., Gaiety Works,
Akeman Street, Tring, Herts.
Tel: TRING 2183 and 2310.**

FERROGRAPH RECORDERS

Tandberg Stereo, Harting, etc.
*Personal Recordings,
Tape to Tape/Disc Service*
GRIFFITHS HANSEN (Recordings) LTD.
24/25 Foley Street, London, W.1
MUSEum 2771

MALVYN ENGINEERING WORKS

*Engineers to the Radio and Electronic Industries—
Manufacturers of:* Chassis, Small Pressings, Machined Components, Wiring and Mechanical Assemblies, to specification.

Single and Production Quantities.
7, CURRIE STREET, HERTFORD, HERTS
Telephone: Hertford 2264

AUTOMATIC BURGLAR ALARM

A relay operated burglar alarm system for under £5. Low operating costs—operates from A.C. or D.C. supply—bell or visual alarm—simple to instal. In constant use all over the world. Send for illustrated leaflet of model 88.

K.E.P. PRODUCTS LTD., Ashmead Works, Ashmead Road, London, S.E.8
"Family Engineers for Over Half a Century"

"Easco"
**INTER-COM &
SOUND Advisors**

BRIGHTON TERRACE, LONDON, S.W.9
Phone: BRixton 4961

**THE "ZEPHYR" (W) 200/250 volts,
SHADED POLE MOTOR**

Precision built, 2,600 R.P.M. 25 watts, 3 1/2 in. wide (over) being high, 2 1/2 in. long. Shaft extension 1/2 in. Die-cast rotor. Sturdy and SILENT Ground and polished spindle (5/32 in. diam.). Suitable for Fans, Extractors, Fan Heaters, Projector cooling, cupboard airing and all purposes where reliability, silence and freedom from radio and T.V. interference is essential.

Price 37/6 (post free motor only)

ACCESSORIES:
Bakelite fan, 8 in. diam. 7/6. Metal fan, 4 in. diam. 5/1

**THE BESTFRIEND ELECTRICAL CO., LTD.
BANSTEAD, SURREY**

F.F.P. motor manufacturers for 30 years
Quantity enquiries invited



**EDDY'S (NOTTM) LTD
172 ALFRETON ROAD
NOTTINGHAM**

NIFE ACCUMULATORS. Midget Single Unit. Size 3 x 2 1/2 x 3/4 in. 1/11. Post 1/6.

TRANSISTOR PORTABLE CASES. Size 6 x 3 1/2 x 1 1/2 in. Black and white. 3/11. Post 9d.

ACOS CRYSTAL PICK-UPS (turnover, 2 sapphire styli). 29/11. Post 2/6.

JACK PLUGS. Standard type. 1/11. Post 6d.

GERMANIUM DIODES. 1/- each, 10/- doz. Post 4d.

DIMMER SWITCHES. Ideal for train speed regulators. 1/11. Post 9d.

VIBRATORS. 12 v., 4 pin. 4/11 each. Post 1/-.

RECTIFIERS. Contact cooled miniature, 250 v. 60 ma., 8/6. RM1 4/9. RM2 6/9. RM3 7/6. RM4 15/6. RM5 19/6. Post 1/-.

DYNAMOTORS. 200 v. D.C. to 12 v. D.C. Ideal for train sets. 19/11. Post 2/6.

MINIMOTORS for model makers. High speed. 1 1/2 v. to 6 v. 8/6. Post 1/-.

MORSE TAPPERS. Plated contacts. Adjustable gaps. Heavy duty. 3/6. Post 9d.

NEON MAINS TESTER/SCREWDRIVERS. 4/6 each. Post 6d.

TRANSISTOR CONDENSERS. Sub miniature. 1.6, 5, 8, 10, 16, 25, 32 mfd. 2/6. Post 6d.

TRANSISTORS. Yellow/green spot 5/11. R.F. yellow/red spot 13/11. Post 4d.

ELECTROLYTIC CONDENSERS. Tubular wire end (not ex gov.). 8 mfd. 450 v. 1/9. 8-8 450 v. 2/6. 16 mfd. 450 v. 2/9. 16-8 450 v. 4/- 16-16 450 v. 3/9. 32 mfd. 450 v. 3/9. 32-32 350 v. 4/- Post 1/-.

THROAT MIKES. 1/- each. Post 6d. Could be used for electrifying musical instruments. All above are new and guaranteed.

**NEW AND SURPLUS VALVES
ALL TESTED BEFORE DESPATCH**

AZ1 12/6	KT36 ... 9/6	5Z4M ... 11/6
AZ31 ... 9/6	KTW61 6/6	6A7 ... 12/6
B36 ... 9/-	L63 ... 4/-	6AG5 ... 5/-
CL33 ... 16/11	MU14 ... 8/6	6AL5 ... 4/6
CY31 ... 12/11	OZ4 ... 5/6	6AM6 ... 4/-
DAF96 ... 8/6	P61 ... 2/6	6BBG ... 2/11
DF96 ... 8/6	PCC84 ... 8/6	6BA6 ... 6/-
DK92 ... 9/-	PCF80 ... 9/-	6B16 ... 6/6
DX96 ... 8/6	PL82 ... 12/-	6C4 ... 4/6
DL96 ... 8/6	PCL83 ... 12/6	6CH6 ... 9/6
DM70 ... 7/6	PEN36C 9/6	6F1 ... 9/6
DH77 ... 7/6	PEN46 ... 6/6	6FM ... 7/6
DH63 ... 8/6	PL33 ... 9/6	6F13 ... 9/6
EB34 ... 1/6	PL81 ... 13/6	6F15 ... 9/6
EB91 ... 4/6	PL82 ... 8/6	6F33 ... 8/6
EB41 ... 9/-	PL8 ... 9/6	6H6M ... 2/6
EBF80 ... 9/-	PY31 ... 8/6	6J5G ... 2/11
ECC81 ... 6/-	PY80 ... 8/6	6J5GT ... 3/11
ECC82 ... 7/-	PY81 ... 8/6	6J5M ... 4/6
ECC83 ... 8/-	PY82 ... 7/11	6K7G ... 2/6
ECC84 ... 9/6	ECL82 ... 10/6	6K7M ... 6/-
ECC85 ... 9/-	U35 ... 9/6	6K8G ... 6/6
ECF80 ... 11/6	UAF42 ... 9/6	6O7G ... 8/6
EF36 ... 2/6	UBC41 ... 9/-	6SA7M ... 7/-
EF37 ... 4/6	UCH42 ... 9/-	6SG7M ... 7/-
EF40 ... 13/6	UF41 ... 9/-	6SJ7M ... 7/-
EF41 ... 9/-	UL41 ... 8/6	6SN7GT 4/11
EF42 ... 9/6	VP23 ... 6/6	6V6G ... 5/11
EF50 ... 1/6	VT52(4p) 2/6	6V6GT ... 6/-
EF80 ... 7/-	Z63 ... 5/-	6X5GT ... 5/11
EF85 ... 7/-	Z66 ... 9/6	10F1 ... 9/6
EF86 ... 13/6	Z77 ... 4/-	12A6 ... 6/6
EF89 ... 9/6	IA7GT 14/6	25A6G ... 9/6
EF91 ... 4/-	ICSGT 11/6	25L6GT 9/6
EF92 ... 5/-	ID5 ... 9/6	35W4 ... 7/6
EL41 ... 9/6	IHSGT 10/6	90AV ... 4/6
EL42 ... 9/6	INSGT 10/6	807B ... 3/9
EL84 ... 9/-	IL4 ... 4/-	954 ... 1/6
EL85 ... 9/6	IR5 ... 7/6	955 ... 3/11
EY86 ... 9/6	IS5 ... 6/6	956 ... 2/11
EZ40 ... 6/11	IT4 ... 5/3	9001 ... 4/6
EZ80 ... 6/11	354 ... 7/6	9004 ... 4/-
EZ81 ... 6/11	3V4 ... 8/6	9006 ... 4/-
GTIC ... 7/6	5U4G ... 6/6	
KT33C ... 8/6	5Z4G ... 8/9	

Any parcel insured against damage in transit for only 6d. extra per order. All uninsured parcels at customer's risk. C.W.O. or C.O.D. only. Postage and packing 6d. extra per volve. Over £3 free. S.A.E. with enquiries.

TELETRON TAPEJAK
The first Transistorized Radio Tuner, specially designed for use with Tape Recorders.
★ High Sensitivity.
★ Twin tuned circuits.
★ Pre-setting for MW. Programmes
★ Fixed tuned for 1500.M.
Price..... £5 9 0
THE TELETRON CO., LTD.
112B, Station Rd., London, E.4.
SL. 0836.

TANNOY
SOUND EQUIPMENT
Tells you what's going on clearly
WEST NORWOOD · S.E.27
Telephone: GIPsy Hill 1131 (7 lines)


RADIO & TELEVISION COMPONENTS
We operate a prompt and efficient MAIL ORDER Service
3d. stamp (only) for catalogue.
James H. Martin & Co. Finsthwaite, Newby-Bridge, Uiverston, Lancashire.

Instrumentation at its best . . .

SIFAM ELECTRICAL INSTRUMENT CO. LTD.
LEIGH COURT - TORQUAY - Telephone 4547/8

A. K. & L. G. SMITH LTD.
Manufacturers of :-
Electrical & Electronic Apparatus
Sub Assemblies, etc.
38 Nunhead Lane, Peckham, London S.E.15
Telephone: NEW Cross 7325

WEBB'S RADIO
Invite you to hear the realism of
STEREOPHONIC SOUND
Stereo Amplifiers by LEAK and ROGERS, Stereo pickups by TANNOY, ELAC, DECCA and RONETTE are in stock at
WEBB'S RADIO
14 SOHO ST., LONDON, W.1.
Tel.: GERrard 2089/7308

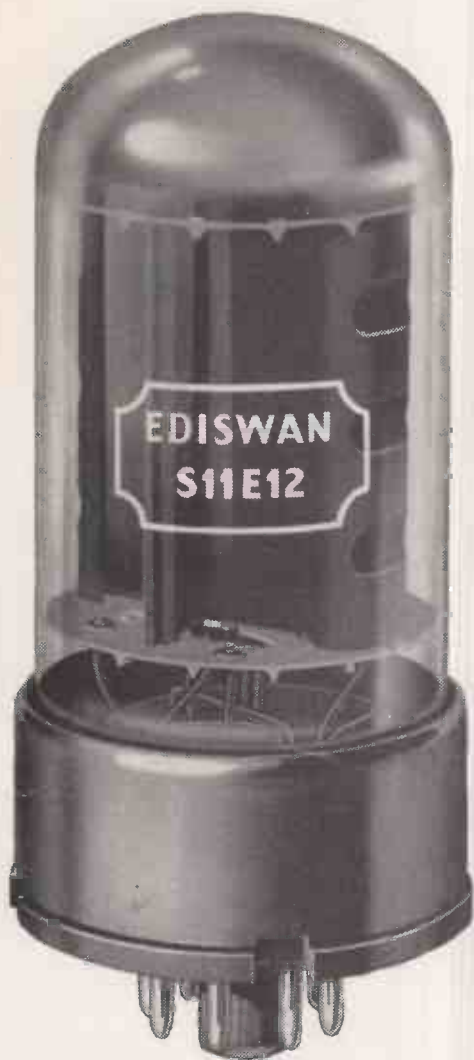

THE EDISWAN S11E12 (CV4060)
Special Quality Beam Tetrode

a newcomer with a first class reference

The S11E12 is the latest addition to the range of Ediswan valves designed specifically for use in series or shunt control circuits.

The S11E12 has an international octal base and the important parameters are as follows:

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	1.6
Anode Voltage, maximum (volts)	V_a (max)	800
Screen Voltage, maximum (volts)	V_{g2} (max)	300
Mutual Conductance (mA/V)	g_m	13.5
Anode Dissipation (watts)	P_a (max)	28
Cathode Current (mA)	I_k (max)	300

The new valve is specially designed to resist shock and is quality tested at all stages of manufacture to ensure maximum reliability and life expectancy. It is available from stock. Further information on this and other valves in the CV 4000 range will be gladly sent on request.

EDISWAN

MAZDA

INDUSTRIAL VALVES
AND CATHODE RAY TUBES
SIEMENS EDISON SWAN LTD

An A.E.I. Company

155 Charing Cross Road, London, W.C.2. Tel: GERrard 8660

**UP TO 10 TIMES
LONGER BIT LIFE**



The left hand bit was used with Savbit alloy and has made 10,000 joints. The centre bit was used for 1,000 joints and the bit on the right for 7,500 joints, each with a standard tin/lead alloy.

**WITH SAVBIT
TYPE 1 ALLOY**

Ersin Multicore Savbit Type 1 Alloy incorporates a small percentage of copper, thus preventing absorption of copper from the bit itself and extending the life of copper bits up to 10 times.

Savbit does not reduce soldering speed: in fact, by keeping the bits in good condition it actually increases soldering efficiency. It has been tested and proved on many famous production lines. Write for further information to the Multicore Service Department.

SAVBIT FOR FACTORIES



Ersin Multicore Savbit Type 1 alloy containing 5 Cores of non-corrosive flux is supplied to factories at bulk prices on 7 lb. reels. 16 and 18 s.w.g. are the diameters most suitable for the majority of soldering processes. Supplies are also available on 1 lb. reels.

SAVBIT FOR THE SMALL USER

The Size 1 Carton contains approximately 53 ft. of 18 s.w.g. SAVBIT. It is also supplied in 14 s.w.g. and 16 s.w.g. Obtainable from radio and electrical stores. Ersin Multicore 5-Core Solder is also supplied in 4 specifications of Standard Tin/Lead alloys. Price 5/- each (subject).



SAVBIT FOR THE SERVICE ENGINEER

Approx. 170 ft. of 18 s.w.g. SAVBIT is supplied on a 1 lb. reel packed in a carton. Price 15/- each (subject).



SPECIAL HIGH AND LOW MELTING POINT SOLDERS

Comsol (Melting point 296°C)
P.T. (Melting point 232°C)
L.M.P. (Melting point 179°C)
T.L.C. (Melting point 145°C)

STANDARD TIN/LEAD ALLOYS

Ersin Multicore 5-core Solder is available in the following standard alloys:


60/40, 50/50, 45/55, 40/60, 30/70, and 20/80 and in 9 gauges on 7 lb. and 1 lb. reels.

HOME CONSTRUCTOR'S 2/6 PACK

Now available containing alternative specifications: 19 ft. of 18 s.w.g. 60/40 alloy or, for soldering printed circuits, 40 ft. of 22 s.w.g. 60/40 alloy. Both wound on Reels. 2/6 each (subject).



Bib WIRE STRIPPER AND CUTTER



This 3 in 1 tool strips insulation without nicking the wire, cuts wire cleanly and splits plastic extruded twin flex. Adjustable to most wire thicknesses. 3/6 each (subject).

BIB RECORDING TAPE SPLICER

Recording enthusiasts can effect considerable tape economies with this splicer. It makes the accurate jointing of tape so simple and quick that every scrap can be used. 18/6 each (subject).



A free copy of an interesting article "How to Edit Tape Recordings" will be sent you if you will kindly send us a stamped addressed envelope.