

# Broadcast ENGINEERING®

THE JOURNAL OF DIGITAL TELEVISION®

88XUCFHL \*\*\*\*\* 5-DIGIT 33155  
802917898 9999 39 02 BE Q 1042  
J R MEYERS PRES  
UNITED RADIO NETWORK  
4700 SW 75TH AVE  
MIAMI FL 33155-4473


**New ways to send video**

- Video over IP
- ATM transmission

**Weather graphics  
systems**

▶ **Special  
Report:  
NAB  
Update**

# How Do You Handle DTV Surround Sound and TV Stereo at the SAME TIME?

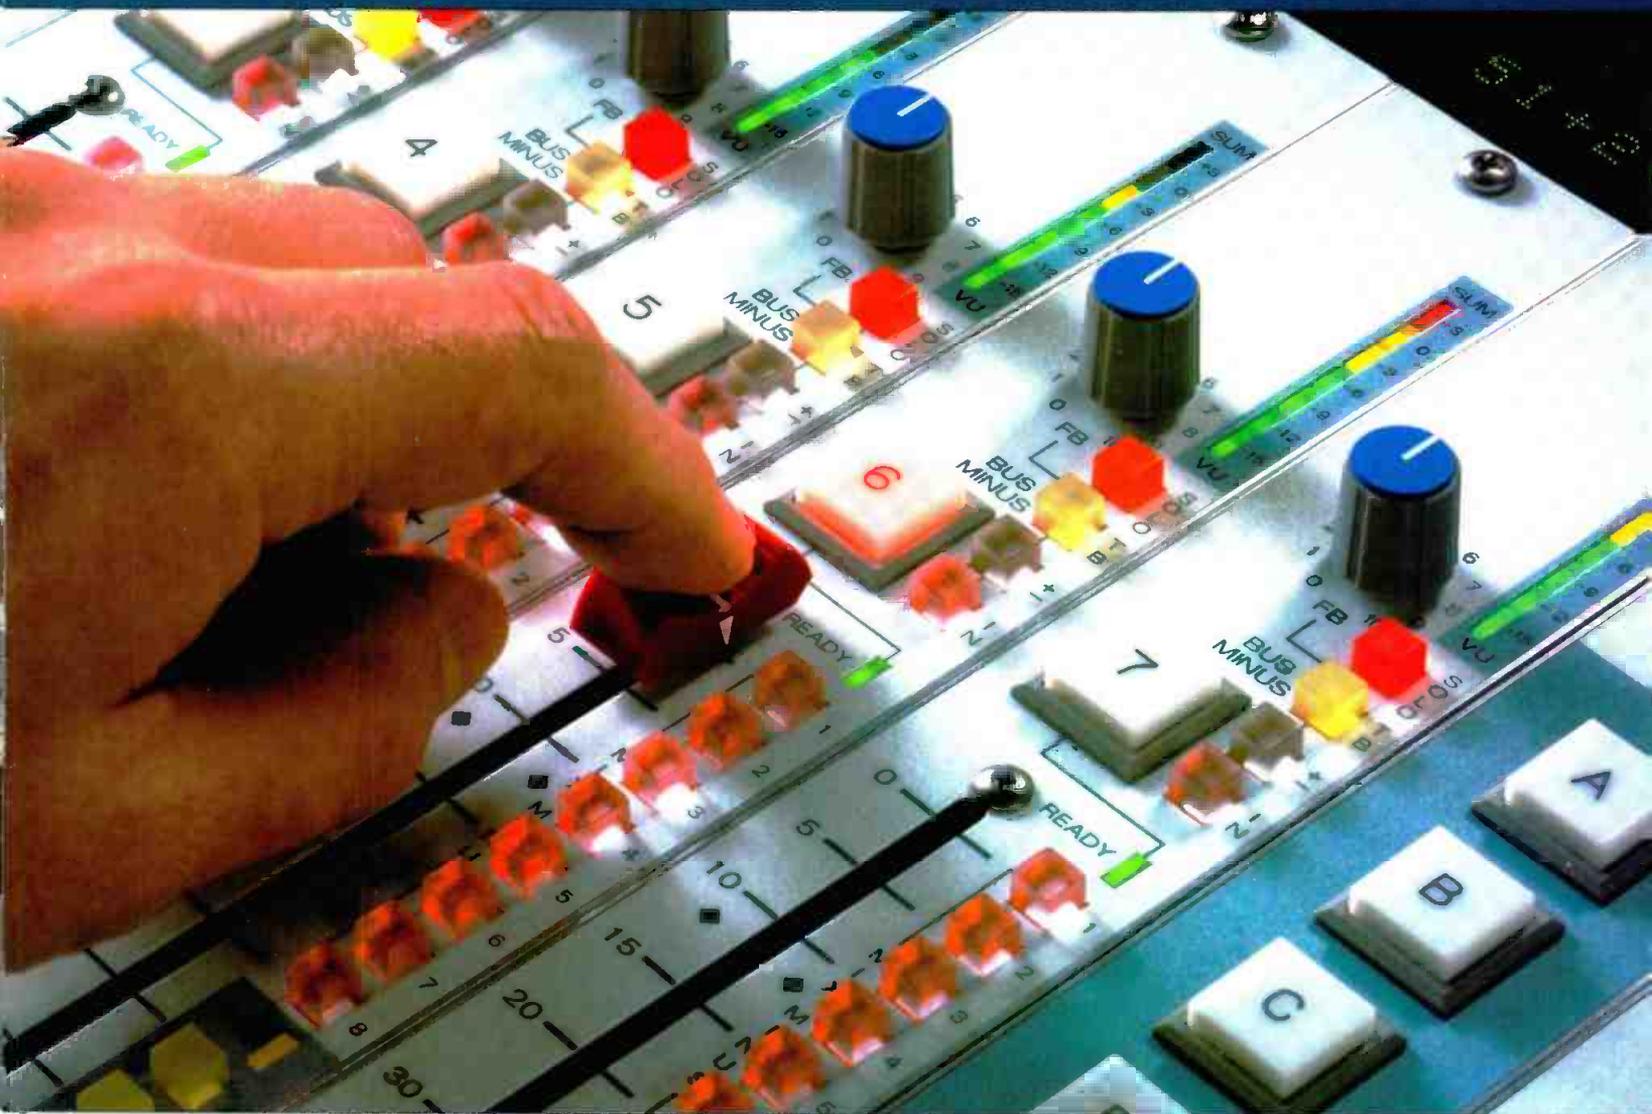


with **ONE FINGER!**

The TV-1000 Live Television Audio Console  
from WHEATSTONE CORPORATION.  
With 5.1 + 2 Surround Sound.



600 Industrial Drive, New Bern, North Carolina 28562  
tel 252-638-7000 / fax 252-637-1285 / sales@wheatstone.com

Circle (101) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

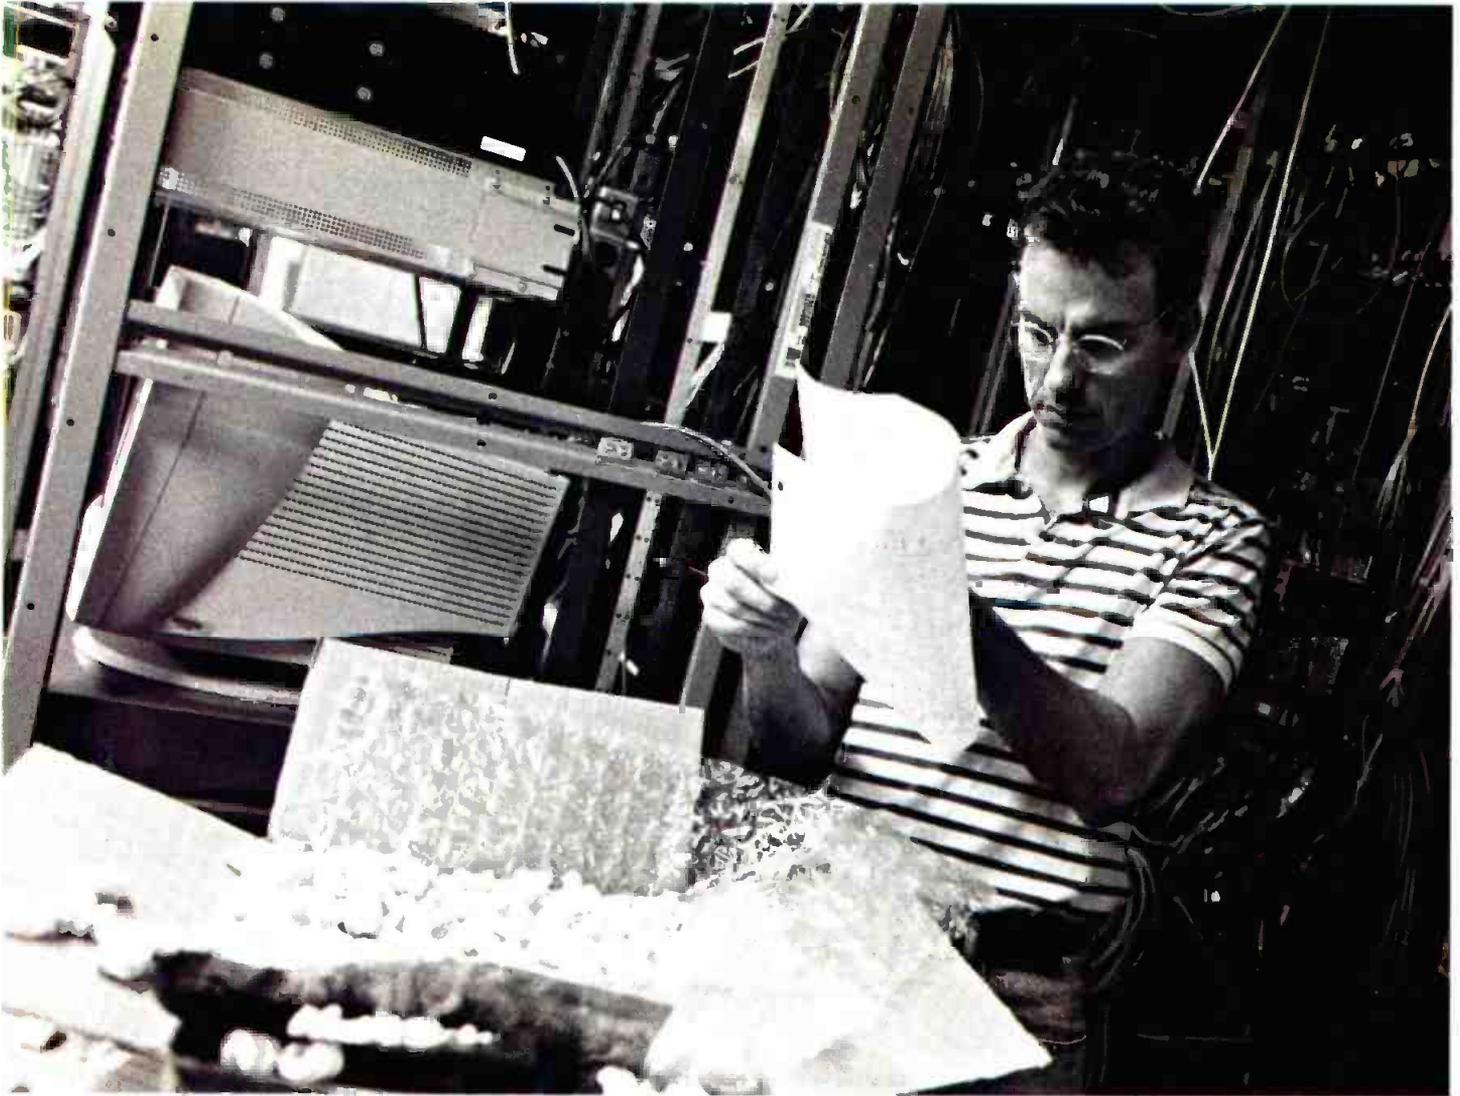

Bubblewrap, no challenge.  
Taking advantage of the technology  
inside, not so fast.

You have brand new, high-tech, shiny digital equipment. Now, how are you going to get the most out of it? Harris can help. Many broadcasters work with us to engineer transmitter systems, studios and mobile facilities with the latest digital technology. But we also reach beyond future-ready equipment solutions by leading the way with a unique package of support services—from transmitter installation and systems integration to round-the-clock technical support. And our Broadcast Technology Training Center provides customized DTV instruction to help your station make a smooth transition to digital. It's all from Harris. Because getting through the bubblewrap should be the hardest part of going digital.

*next level solutions*

WIRELESS

BROADCAST

GOVERNMENT

NETWORK SUPPORT

1-800-4-HARRIS ext.3042 ■ [www.harris.com](http://www.harris.com)

**HARRIS**

Circle (104) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)




**THE ROSWELL SYSTEM  
IS MAKING IMPRESSIONS  
IN UNEXPECTED PLACES.**



## ROSWELL FACILITY MANAGEMENT SYSTEM

*Content Management & Delivery in an Internet World*



How many impressions  
can you create for your

advertisers? Countless more when you use the Roswell Facility Management System from Odetics. Whether your business plans call for multi-casting, data-casting or web-casting, Roswell easily plugs into your existing facility and immediately offers you the scalability required to meet the digital demands of a changing business. Leveraging the latest systems technology and Odetics' proven asset management expertise, Roswell is ready now for prime time. Contact us for a demonstration of Roswell and discover how affordable the digital future can be. We're sure it will make a lasting impression on you.

**Odetics**


Wired for the future

[www.odetics.com/broadcast/](http://www.odetics.com/broadcast/) Phone: 714-774-2200

**NAB BOOTH #L9341**

Circle (105) on Free Info Card

## IN THIS ISSUE

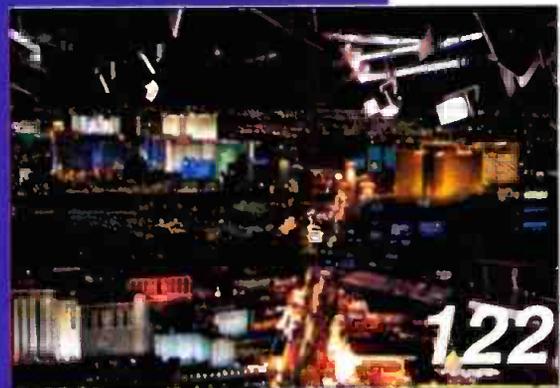

## Features

### 98 Video over IP

By Shawn Carnahan

High-speed connections and video file transfer through Internet protocol offer networking advantages.

### 104 Understanding ATM

By Jim Boston

An introduction to moving video through ATM.

### 110 Newstech: Weather and graphics systems

By Tracy Mason

A state-of-the arts weather system should not be forgotten in the the transition to digital.

### 122 Special report: NAB update

By BE Staff

Up-to-date information of over 200 of the newest products.

## Beyond the Headlines

### NEWS

- 16 Cable-broadcast compatibility -- an oxymoron?
- 18 Hollywood pursues copyright protection
- 22 Exposure deadline looms
- 24 Lookout HDTV! What's next?

### FCC UPDATE

- 28 New FCC EEO rules adopted

### EXPERT'S CORNER/VENDOR VIEWS

- 30 Choosing a tape format

## Digital Handbook

### TRANSITION TO DIGITAL

- 52 The ATSC standard


### COMPUTERS AND NETWORKS

- 58 Virtual sets

### ASK DR. DIGITAL

- 62 AES-3 distribution: Coax or twisted pair?

(continued on page 8)

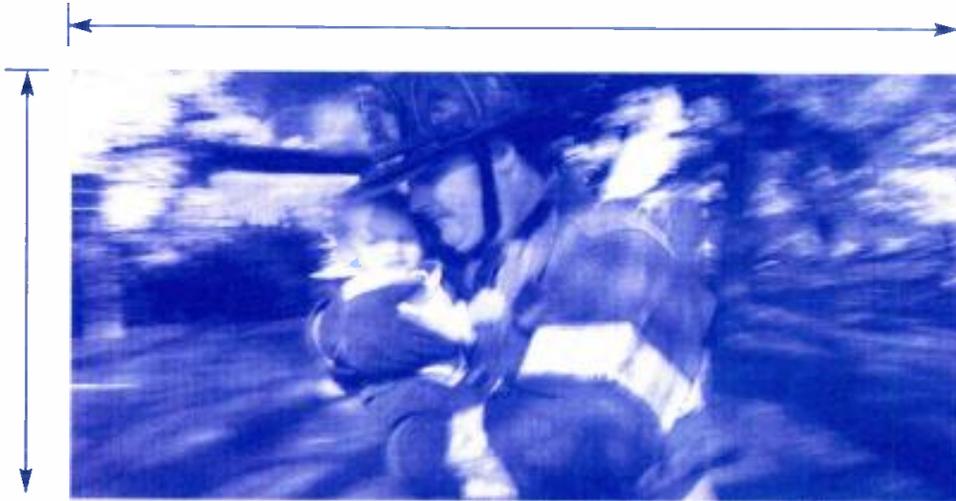

Today it's the news at 6:00.  
Tomorrow it's prime time.  
You need options for  
ENG economy and EFP quality.

You Could:

- A) Buy both and break the bank.
- B) Go Panasonic.



Introducing the AJ-D910WA DVCPR050 camcorder -- the new standard for ENG/EFP acquisition. Featuring both 4:3 and 16:9 widescreen, the AJ-D910WA offers both economical 25 Mbps DVCPRO and studio quality 50 Mbps 4:2:2 DVCPR050 recording

in a single camcorder. The new AJ-D910WA enables a complete 50 Mbps I-frame recording and editing system without the need for transcoding, plus its optional Digital Triax system permits remote camera and VTR control. Call us today at 1-800-528-8601 or visit our web site at [panasonic.com/openminds](http://panasonic.com/openminds).

The AJ-D910WA, because you never get a second chance to make a first compression.

**Panasonic**  
Open systems. Open minds.™

[www.panasonic.com/openminds](http://www.panasonic.com/openminds)



# Systems Design & Integration

## SYSTEMS DESIGN SHOWCASE

- 64 News network served new video playback solution
- 72 KVBC-TV
- 80 Sony's RIBs: Rack in a box

## TRANSMISSION & DISTRIBUTION

- 88 STLs: The ignored system

## PRODUCTION CLIPS

- 62 A tale of the tape



# New Products & Reviews

## APPLIED TECHNOLOGY

- 176 The digital benefits of solid state transmitters
- 182 Ampex DST Video Server Archival Storage
- 186 Logic Innovation's MM-1000 MPEG monitor

## TECHNOLOGY IN TRANSITION

- 190 Audio consoles for broadcast

## BUSINESS WIRE

- 194 Business highlights from broadcast and production



# Departments

- 10 Editorial
- 12 Reader Feedback
- 212 Classifieds
- 219 Advertisers' index
- 220 EOM


**ON THE COVER:** Shown on the cover is the master control room monitor wall of the DISH Network, which provides 500 channels of digital programming. The "wall" contains 1020 monitors, each tied to an individual satellite receiver tuned to one of the six EchoStar satellites. Photo courtesy, IMMAD ECVS, Boonton, NJ.

## FREEZE FRAME

A look at the technology that shaped this industry.

### Do you remember?

At the 1976 NAB conventions, 1" helical VTRs were just becoming known. At the show Ampex demonstrated for the first time on it helical VPR-1, a key feature, which allowed freeze-frame and slow-motion playback. This technology was a key factor in helping set the stage for the demise of the quad format. What was that technology? A bonus will be given to the person who can name the four companies who were demonstrating helical VTRs at that show. entries received by May 30 will be eligible for one of the new Broadcast Engineering T-shirts. Send your entry to [brad\\_dick@intertec.com](mailto:brad_dick@intertec.com).

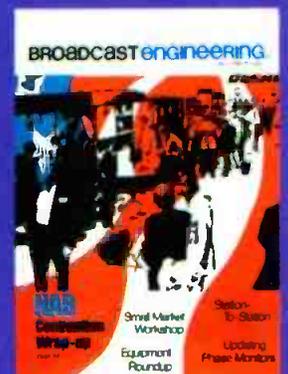

## WEBSITE DIRECTORY

[www.broadcastengineering.com](http://www.broadcastengineering.com)

Feature Articles

Departments

New Products & Reviews

Classifieds/Jobs

Marketing/ Advertising

Reader Resources

- Editorial calendar
- Article archives

Contact the Editors

Questions? Contact:

Jim Saladin  
[jim\\_saladin@intertec.com](mailto:jim_saladin@intertec.com)  
 913/967-1905 fax



## Running digital and analog can be tough. Good thing there's geeks like us.

Sure, some broadcasters call us industry geeks. Others call us industry experts. But it's all the same to us. Because when it comes to the chaos of adding digital while maintaining a profitable analog operation, we're the geeks you need. Harris is the most experienced, most reliable choice for analog and digital operation. We've delivered more DTV transmitters, encoders and support equipment than any of our competitors, with expertise that has built a reputation for reliability. A reputation that carries over to our systems integration work, whether you're adding DTV capabilities or building from the ground up. So when analog and digital collide, call us. Because whether we're experts or geeks, we're still Harris. And we can help.

*next level solutions*

WIRELESS

BROADCAST

GOVERNMENT

NETWORK SUPPORT

1-800-4-HARRIS ext.3032 ■ [www.harris.com/communications](http://www.harris.com/communications)

Circle (106) on Free Info Card


[www.americanradiohistory.com](http://www.americanradiohistory.com)

**HARRIS**

## Working together for community towers

**A** reader's recent comment on his inability to get a community tower project off the ground started me thinking. Why is it that most broadcasters demand that they own their own towers?

After a few calls to some broadcasters, the answers were pretty much as I expected. Some stations are suspicious of any cooperative arrangements with competitors. Most stations have always owned their towers. The very idea of sharing space on a tower you don't own along with your competition is somehow uncomfortable for many station engineers and managers. However, with DTV there are several good reasons to do so.

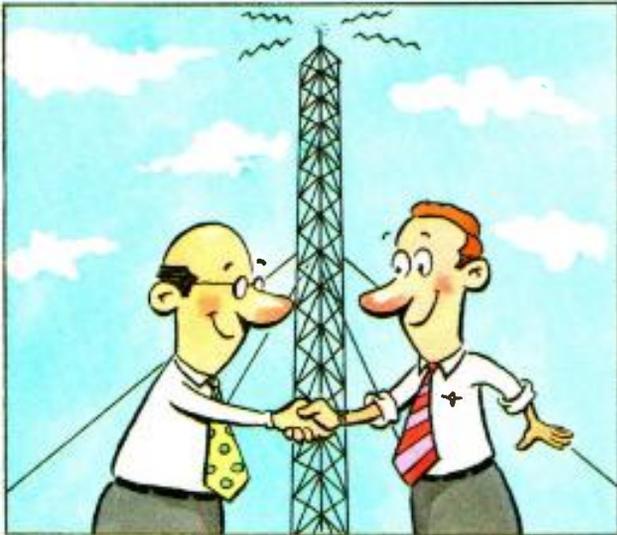

The first is cost. It's cheaper to build one stick and share the cost among several stations than it is for everyone to build their own tower and go it alone. The second reason to consider a community tower also involves money, but more than that, it involves politics.

Local governments have buildings full of lawyers and code enforcers, all just waiting to take you to court or prevent you from moving one shovel of dirt for a new tower. If that's not enough to scare you, don't forget nice old Mrs. Smith, who has lived on that perfect site for 50 years. There will be some that claim you want to irradiate her and her cats, probably causing cancer and who knows what else with your TV tower. Are you sure you want to face those obstacles alone?

Let's consider the viewer. A friend in California wanted to buy an HDTV set. However, he wasn't going to part with that significant chunk of cash until he could be assured that he could get off-air reception. To help answer the reception

question, I checked out his location with the CEA's antennaweb.org website. The results were not encouraging.

The CEA website predicted that he would need a large antenna complete with a preamplifier. Even worse, because the stations were spaced more than 180 degrees around his location, he needs a rotor! A rotating receive antenna to get DTV signals. Can you spell dinosaur? Does any *Broadcast Engineering* reader really expect someone to plunk down \$4000-\$9000 for an HDTV set and then be willing to rotate the antenna every time he changes channels? That's simply not going to happen.

We all win with community antenna projects. We reduce the number of towers — a trend both the FAA and the city governments like. We reduce construction and maintenance costs, which stations like. Finally, we place our DTV signals all in one general direction, which consumers will like. Everybody wins. Isn't that the goal?

*Brad Dick*

Brad Dick, editor

Send comments to:  
direct: [brad\\_dick@intertec.com](mailto:brad_dick@intertec.com)  
website: [www.broadcastengineering.com](http://www.broadcastengineering.com)

Solving the Digital Puzzle



# Your Complete Monitor Wall in a Single Display

- ◇ 4:3 / 16:9 aspect ratio
- ◇ Analog / Digital / Computer Inputs
- ◇ User Defined Layouts
- ◇ Compact / Light / Low power




# Kaleido

## Virtual Monitor Wall Processor



See us at NAB Booth #L3330

Circle (107) on Free Info Card

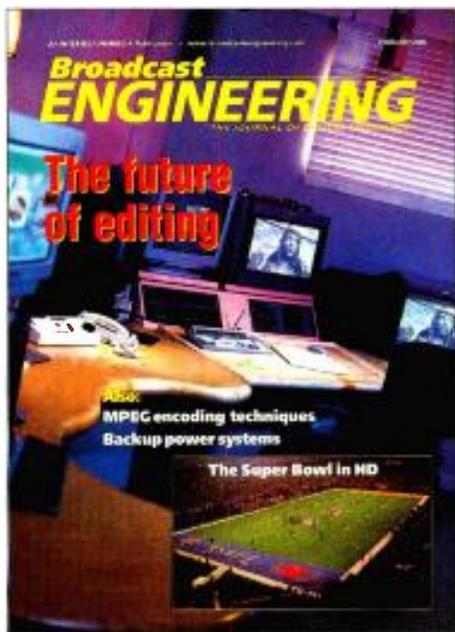

## Hollywood cheats movie goers

Dear Larry,

I found your article quite interesting and you hit on a number of points we all need to become more aware of. I wonder, though, if there is not one more dimension to the actual achievable resolution in a film system.

You start off using 35mm film as a benchmark and state that the film, has a resolution which is about twice horizontally and twice vertically the two megapixel resolution of 1920x1080. You note that some in the film industry claim only 2K resolution (about two megapixels) for 35mm film. CBS, in a study a couple of years ago, seemed to come to the same conclusion. That indicates a difference of opinion between the film manufacturer, Kodak, and users over the resolution capability.

What about the limitations in the optics? Will camera and projector lenses tend lower resolution? If the film has a resolution capability an order higher than the optical systems will support, that would not

be a bad thing, as it would render invisible minor grain imperfections in the film while still achieving the desired result.

KARL BLACK  
BROADCAST TECHNOLOGY INSTRUCTOR  
HARRIS BROADCAST SYSTEMS

Karl:

*There is no simple answer. We use 35mm film as the benchmark for digital cinema. Native film resolution is not dependent upon characteristics of the film camera lens nor the theatre projection lens, nor does it include the losses encountered when making an interpositive dupe negative and re-release print.*

*The film grains in modern motion picture film average around 3.5 microns. The 3.5-micron film grains are about 0.0001377 inches in size. If each film grain just touched each other you would have about an average of 5,987 film grains across a full aperture of 0.980 inches (24.89mm). We know that the film grains in the three-emulsion process are randomly spread and as more light photons arrive, more of these silver halide film grains are going to become exposed. The exposed film grains are then developed and replaced with the appropriate dyes during processing and dye clouds are formed where their density is proportional to the number of photons that strike the silver halide grains. If you photograph a chart made up of high contrast black and white lines, the theoretical maximum number of line pairs (black and white lines) that the film negative can resolve then is somewhere around 190 line pairs per millimeter (lp/mm). Experience and published documentation show that the film negative does resolve better than 85lp/mm. In other words, using 85lp/mm, the film negative can easily resolve more than 2000 horizontal*

*lines in a "full aperture" film camera.*

*In order to scan a film of that resolution, the scanner must be capable of least 3000 samples of that image. The number of samples will be tied to the actual distance across the image and will have a spatial sampling rate measured in cycles per picture width or cycles per picture height (c/ph). For a 16:9 (1.78:1) aspect ratio then you would have to have a sample grid of about 3000x1687 pixels to equal the resolution of 35mm motion picture film. That's a lot more than the two megapixels used for HDTV with its 1920x1080 sample grid.*


*Kodak claims that film resolution is equivalent to 4096 pixels, which is true if you measure from sprocket hole to sprocket hole across the film. However, the image does not go from sprocket hole to sprocket hole. It is slightly narrower to allow for a sound track. Most release prints are shown with apertures of only 0.825 inches (20.96mm) across. This is called Academy Aperture. Assuming no loss from making a print, this results in an image with a resolution of only 3562 x 2000. Notice that the 2000 is c/ph. This is where the often-quoted figure of 2000 lines comes from.*

*The CBS tests you mentioned tried to equate release print resolution and came up with similar data. It also included the losses from the printing, MTF of the projection system and included both lenses and the projector weave.*

*The optics definitely will lower the resolution of the image as will the printing of the IP dupe negative and release print. The goal for digital cinema shouldn't be to reproduce what the theater patron now sees from a release print, but to show an image similar to what the producer and director see when viewing and approving the answer print in the lab.*

*Thanks for your inquiry.*

LARRY BLOOMFIELD  
NEWS TECHNICAL EDITOR

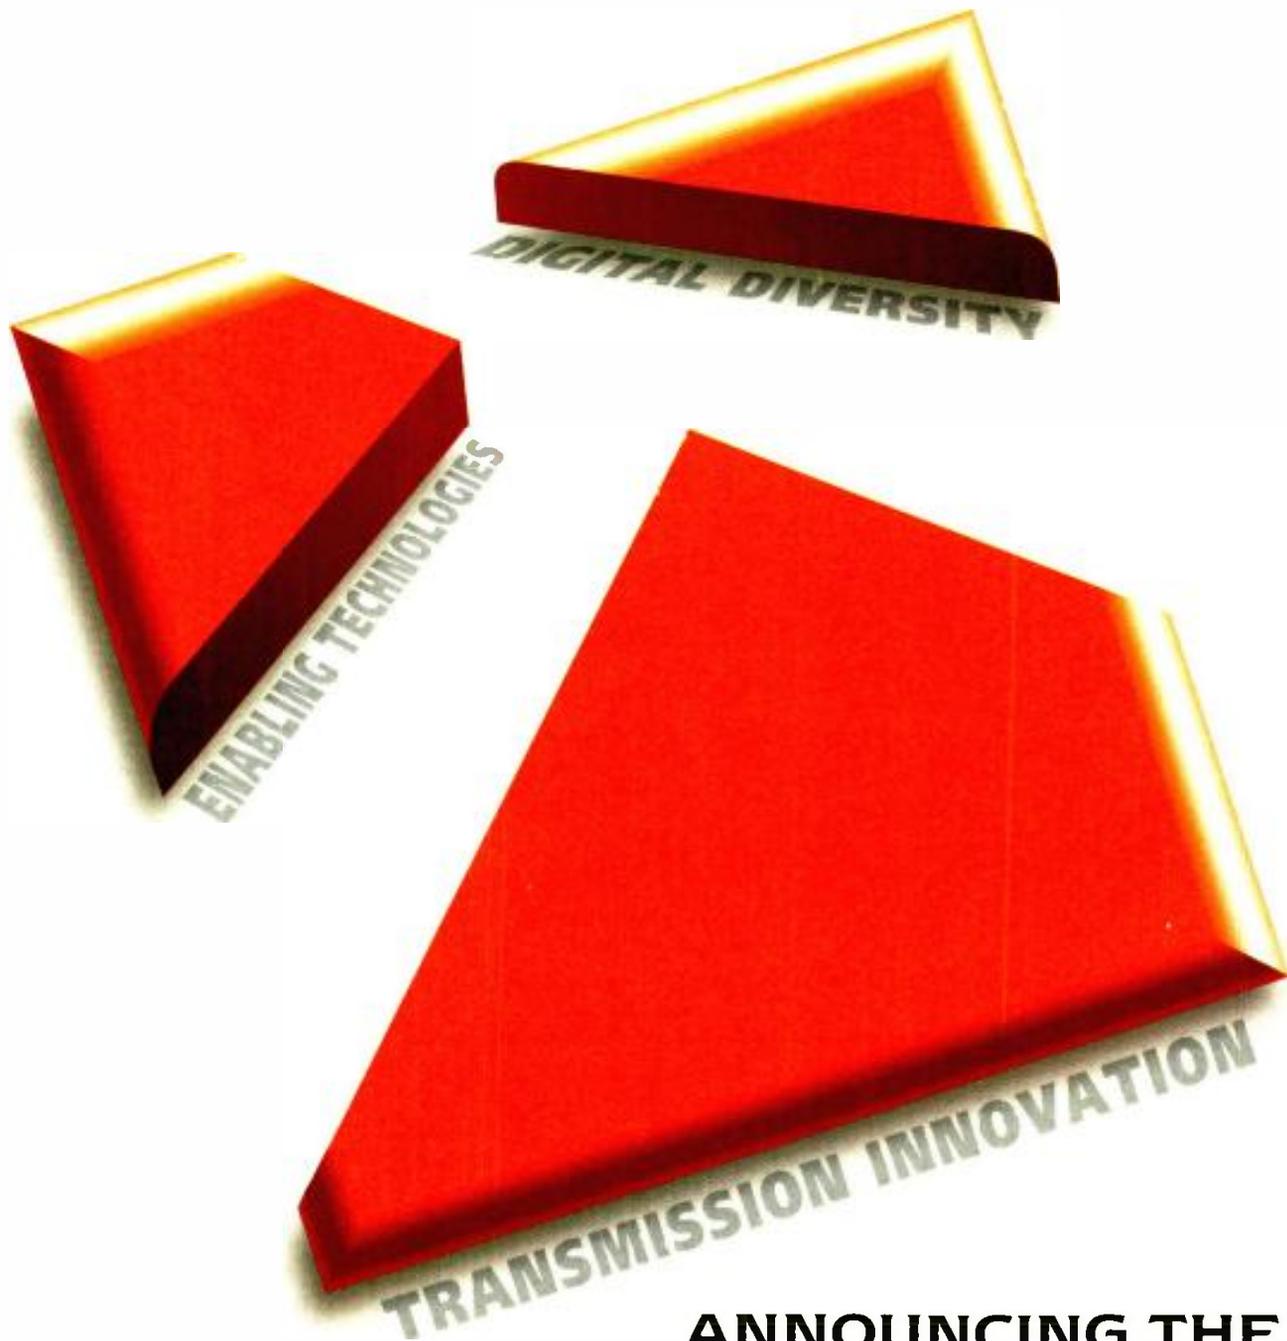

## ANNOUNCING THE STATE-OF-THE-FUTURE

Tiernan digital encoders were key parts of the first DSNB systems, essential elements in the first 4:2:2 SDTV systems, and the heart of the first HDTV broadcasting systems. Today, as we enter a new era in broadcasting, Tiernan brings you a broad range of digital TV solutions, including datacasting, HD/SD simulcast, and multi-channel operation for the delivery of digital media. Tiernan can take you wherever you want to go, however you want to get there.



USA: TEL +1 858 587-0252 • FAX +1 858 587-0257  
UK: TEL +011-44-1420-544-200 • FAX +011-44-1420-88999  
info@tiernan.com www.tiernan.com

Visit us at NAB 2000 Booths S4162 (Sands) and OD206

Circle (108) on Free Info Card

A close-up photograph of a shark's open mouth, showing its sharp teeth. The text "KILLER NEWS BITES" is superimposed in yellow, bold, sans-serif capital letters across the upper teeth. The shark's skin is a dark, textured blue, and the background is a bright, out-of-focus white.

**KILLER NEWS BITES**



USE 'EM. DON'T LOSE 'EM.

## ■ INTRODUCING MEDIA BROWSE 2000

The journalists' video browser with teeth.

Feeds, raw footage, field coverage – the media never stops flowing in. In the race to get news to air, you can't afford to waste time searching for just the right footage, waiting for feeds to finish, or dubbing and passing around tapes.

And now you don't have to. Media Browse 2000 is the Avstar media manager that lets you instantly capture or schedule the recording of incoming material. Editors, journalists and writers can browse MPEG-1 video and make frame-accurate, cuts-only edits at their desktops – all using the same footage. Metadata searching makes it easy to find clips. Edited pieces can be viewed at low-res before going to air. Auto-conforming on high-res systems gets you to air faster.

Open, modular, reliable and easy to use, the Avstar Media Browse 2000 makes sure you're never left talking about the clip that got away.

For more information, call us in the US at 1-608-274-8686 or in Europe at +44 1256 814300, or visit us at [www.avstarnews.com](http://www.avstarnews.com).

See us at NAB (in the Grass Valley Group Booth L11018 next to Avid).

**AVSTAR**  **20 YEARS OF MAKING NEWS**



## Cable-broadcast compatibility — an oxymoron?

BY LARRY BLOOMFIELD

As if the migration from analog to digital by this country's television broadcasters hasn't been plagued with enough problems, the cable industry done their part to support this process either. With a July 1, 2000 deadline facing the cable industry to settle on a standard for interfacing their services with digital television in all of its various scan rates, frame rates and definitions. Federal Communications Commission (FCC) Chairman William E. Kennard, seized the moment during his address to this January's Consumer Electronics Show in Las Vegas to warn the cable industry and CEA that time was running out to resolve some important technical issues.

Kennard said, "In January, I urged the industries to accelerate and complete negotiations to resolve four major issues that were delaying digital television sets that connect directly to the cable system, and, therefore, the transition to digital TV." According to

Kennard, those issue that posed the most formidable obstacles are a lack of technical standards for direct connection of digital TV receivers to digital cable television systems; a lack

**Like the first time, this agreement is just as notable for what it doesn't include as for what it does.**

of agreement on how to provide tuning and program schedule information to support on-screen program guides for consumers; a lack of agreement on the labeling of TV sets without two-way digital connections to other consumer electronic devices; and a lack of agreement on licensing terms for copy protection technology. Recently the chairman was quick to take

credit for the resolution of two of these issues.


In late February, the cable industry claimed it and receiver manufacturers had resolved some of the key issues regarding the interconnection of set-top boxes and displays.

CableLabs is a technical clearinghouse for cable television system operators and does research and development. CableLabs is the keeper of the "OpenCable" process that is intended to be the fast-track initiative to attain interoperable digital set-top boxes and other advanced digital devices manufactured by multiple vendors.

CableLabs stated, "OpenCable specifications with these amendments now provide a complete technical blueprint for construction of compatible digital television receivers. Receivers meeting these guidelines will be interoperable with cable systems throughout North America."

Robert Sachs, president of NCTA, said, "This is good news for cable customers contemplating a purchase of a digital television receiver. This voluntary solution makes unnecessary government involvement in setting compatibility standards for the dynamic digital TV marketplace." Gary Shapiro, president of the CEA, sees this as, "yet another giant step forward in the transition to DTV." Both Shapiro and Sachs praised Kennard and the FCC for expediting industry resolution of these issues and contributing greatly to the success of the joint CEA/NCTA discussions.

These agreements mark an important milestone in the U.S. transition to digital television. They detail the technical requirements that permit the direct connection of digital television receivers to cable television sys-

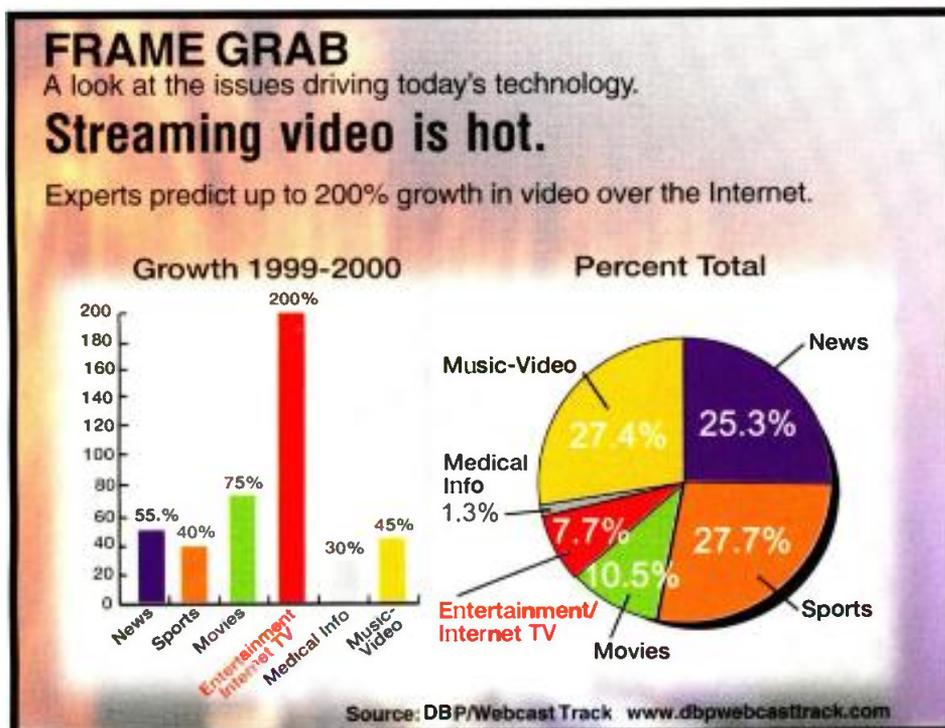

# FIRST CHOICE FOR EVERY VOICE



You've spent years perfecting your voice with just the right articulation and timbre to get you into broadcast. You need a microphone that faithfully delivers that sound to your audience. That's why broadcasters everywhere choose the Electro-Voice RE20 and RE27N/D. Their wide-band response and Variable-D® design delivers an outstandingly clear performance every time. Variable-D® eliminates the up-close "proximity effect" bass boost that makes other directional microphones sound "muddy."

Why not check out EV's entire family of problem-solving broadcast microphones. Every one guaranteed unconditionally against malfunction from even accidental abuse, for two years from the date of purchase. The first choice of professionals...

**EVERY TIME, EVERYWHERE.**



**EVERYWHERE™**

©Telex Communications, Inc.

**800-667-3968**  
**www.electrovoice.com**

Circle (110) on Free Info Card  
www.americanradiohistory.com

tems, specifying the signal levels and quality as well as video formats. They also provide for the carriage of Program and System Information Protocol (PSIP) data on cable systems to support on-screen guide functions in digital receivers. Subject to certain conditions, PSIP data enables features such as on-screen program guides, virtual channel tables, program name and description (for a minimum 12-hour period) and content advisory information.

Chairman Kennard praised CEA and NCTA and said the industry agreement on digital TV technical standards "will jump-start the digital revolution for television" while permitting "the benefits of digital programming on their digital TV sets from both over-the-air broadcast stations and cable systems." Kennard attributed the issues that were "holding up DTV set production" were a lack of agreement on the direct connection technical standards and the program guide issues.

"Taking into account the lead-time required for TV set manufacturing," Kennard added, "this will allow consumers to buy digital cable-ready sets by Christmas-time next year."

Kennard said, "I stated that if the industry could not reach agreement, I would recommend that the Commission write rules to protect the public and speed the digital TV transition." Proposed rules on FCC-imposed compatibility were pending before the FCC when the joint announcements were made. Kennard

concluded, "I will recommend to my fellow Commissioners that proposed rules on the technical standards and program guide issues be removed from consideration but that we continue to review proposed rules on the two remaining issues."

### Stalling tactics

This is the second time the CEA and NCTA have made such an announcement and like the first time, this agreement is just as notable for what it doesn't include as for what it does. It isn't difficult to understand why there are those who view this as nothing more than a ploy to keep the FCC out of the mix. It's one thing to take positive action. It's another to generate political stratagem. Probably the most important of the "remaining issues" includes just what really constitutes a "cable-ready" digital television set.

Although Commissioner Susan Ness praised the CEA/NCTA interoperability agreements and sees it as "a significant step toward facilitating the Na-

tion's transition to digital television," she did not dismiss the remaining issues: "We can't declare victory when the game's only at halftime."

Cutting to the chase, Ness said: "There remain significant issues of disagreement that could have profound effects on the digital transition. We must bring to resolution the outstanding issues of copy protection and the accurate labeling of digital television receivers. I would support a Notice of Proposed Rulemaking that properly addresses these questions, should the consumer electronics and cable industries fail to reach an agreement." Concluding her statement, Commissioner Ness said: "I am hopeful, however, that just as industry forged a consensus on network interface and PSIP disputes, it will do so with respect to copy protection and labeling."

Despite this agreement, the compatibility issue is a long way from being settled. The National Association of Broadcasters said, "The agreement is a sham." ■

---

## Hollywood pursues copyright protection

**A** long debated issue that raises its head occasionally is copyright protection. Broadcasters will become more involved as they move on into

ritry have been so intertwined that it is difficult, at best to distinguish where one begins and the other leaves off. Copyright protection is Hollywood's main focus. One of the most recent wrinkles in overprotection is the possibility of adding copy protection to the link between a computer or set-top box and a display using the digital interconnect being developed by the Digital Display Working Group (DDWG). Recently Intel announced a copy protection scheme for such links.

## According to the judicial reading of the Digital Millennium Act, virtually anything that circumvents copy protection is illegal.

---

the digital era. With more digital services, in addition to normal programming, begin to find their ways into the bit stream, terms like "conditional access," "encryption" and other "read about" verbiage pertaining to who gets to see a piece of material, will become part of daily practice.

The concepts of copyright and secu-

**New taxes**  
Although technology may be an answer to some copyright issues, it is none-the-less a very disturbing move toward a "copy protection tax" that could worm its way onto every "bit" and "byte" of digital material: Internet, television, radio and digital cinema. Anyone remember the drive to tax digital recording tape? If the industry thinks they have

**BE'S NAB  
ONLINE  
DAILY**  
Don't miss *Broadcast Engineering's* complete, up-to-the-minute coverage of NAB. Go to [WWW.BROADCASTENGINEERING.COM](http://WWW.BROADCASTENGINEERING.COM) for the latest show news, products and tips.

**HOW TO CONQUER YOUR FEAR  
OF BEING DVEOUS.**

**Abekas**

**JUST TURN  
IT ON.**



The second you power up a Dveous, you'll feel quite at ease. The world's most widely-acclaimed DVE delivers the industry's most dazzling effects, yet is easy to use. That's why the Oscars, Olympics and the effects-crazed X-games use Dveous. And why Dveous OrbitalFX™, UltraWarp™, SurfaceFX™ and more are what others imitate but cannot match. Bottom line, it's Dveously easy. Want proof? Get a demo.

[www.accom.com/dveous](http://www.accom.com/dveous). Find out why Dveous is simply the ultimate turn on.

Circle (111) on Free Info Card

See us at NAB Booth #S4909

© 2000 Accom, Inc. All trademarks are the property of their respective holders.

**Accom**

problems with compatibility and interchangeability now, just wait until the cages of the cyber-geeks are opened so they can apply their magic to the simple data streams the broadcast industry is just now accepting as common place. There will be more ways of encrypting data than celestial bodies in the firmaments. As one industry observer put it, "This is not only an unnecessary burden and expense for consumers, but may further complicate a rapidly mushrooming night-

mare — how to provide interoperability between all of the networks that will be interconnected to create in-home digital media networks."

There are viable alternatives available that could employ appropriate content management schemes based on both digital watermarking and key management techniques. This approach deals directly with protecting content and the collection of revenues for the content owners.

The downside of all this is that the

"gatekeepers" have the bucks on their side and will probably force copy protection on the unwitting public. The FCC is monitoring the political winds and appears to be addressing compatibility standards for interconnection of set-top boxes with DTV receivers.

### New digital encryption


The front runner in the "protection" racket seems to be a technique called 5C and will work via the IEEE-1394 interface, which Hitachi, Intel, Panasonic, Toshiba and Sony have backed. In addition to this, Intel Corp. unveiled a copy protection scheme earlier this year. It will add a layer of encryption between the system and the digital display. The High-bandwidth Digital Copy Protection (HDCP) approach encrypts each pixel as it moves from either a personal computer or set-top box to the digital displays.

HDCP encrypts the final link, from the device to the display. This has been the missing link in the various copy protection schemes developed thus far. This technology was successfully demonstrated in Silicon Valley in late February. Transmitter and receiver chips performed the HDCP authentication, encryption, and decryption functions, while supporting the digital video interface transmission rate of 5Gb/s between the host and display. HDCP uses a 56-bit key, with individual keys distributed to the various vendors. A violated key could be tracked down and revoked over a satellite broadcast network, for example.

5C, on the other hand will allow a movie to be transmitted with a marker that will allow it to be copied freely, copied just once or not copied at all. The Catch-22 in this equation is that Hollywood and the cable companies must agree on how movies are to be marked. Despite the fact that this will create more problems than it will solve, it seems to be the technology the FCC favors.

The reason that this works without elaborate copy protection schemes is quite simple. A copy requires a new verification. Once the copy has been authorized it can be played anywhere and copied freely. The copies however


# HDTV I.Q. Test

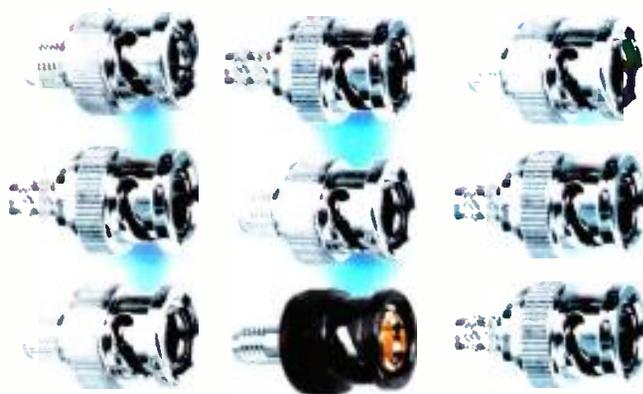

## Find the true 75 ohm digital connector

Don't be fooled into believing that yesterday's BNC's are up to the demands of digital broadcasting. You need the *true* 75 ohm connection that you get with the new sleek, black UPL2000 from Trompeter. It is the only BNC designed for high bit-rate digital video signal transmission and offers significant performance advantages over standard BNC's (@1.485 Gbps >8db return loss improvement). Built rugged to deliver reliable performance over time, the UPL2000 is priced right and available today.

Don't compromise your signal with yesterday's connectors. Do digital right with the sleek, black UPL2000.

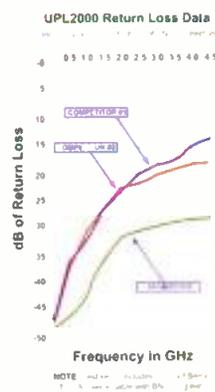


Straight 45 and 90 models, Various dia. cable sizes to support broadcast, post production and CMAA headends.



**GET QUOTES FAST... VISIT OUR WEBSITE TODAY!**  
[www.trompeter.com](http://www.trompeter.com) or call: 800 982-2629

See us at NAB Booth # L6913 Circle (112) on Free Info Card

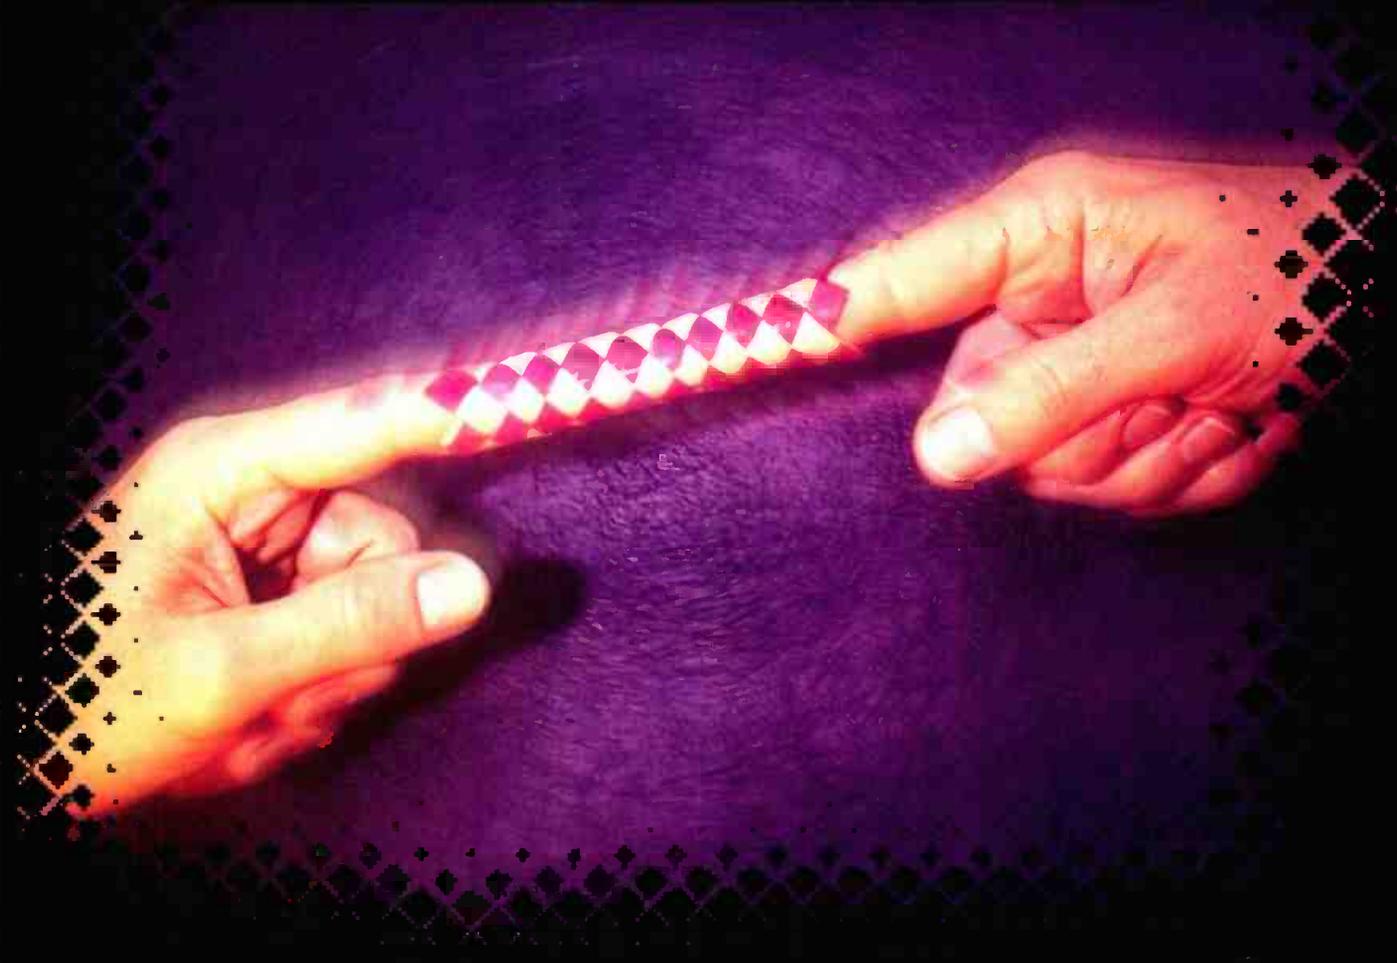

ONCE YOU CHOOSE A "CLOSED"  
DTV SYSTEM, IT CAN BE DIFFICULT TO  
GET OUT!

DIVICOM DTV SOLUTIONS FOR ATSC  
ARE TRULY OPEN AND FLEXIBLE.

DTV is in its infancy. As the market matures, you're going to want the flexibility to grow with it. Choose a rigid, proprietary solution and you're stuck. However, with our open MPEG-2 solutions, you'll remain free to evolve your systems and services by integrating best-of-breed elements to meet your future needs.

The powerful hardware architecture of our MediaView™ family of SD and HD encoders enables you to meet future requirements through software upgrades. Should you later offer new services to generate additional revenues, our high-performance MPEG-2 compression technology enables you to better utilize existing bandwidth while maintaining optimum signal quality.

As the leaders in open solutions for digital television, we offer a robust portfolio of encoders, multiplexers, data broadcasting products, network management systems, DSNG/ENG solutions, and flexible integration and support services. If you're ready to get into DTV and know you're going to need the freedom to move with the market, call your DiviCom representative today or visit our web site.

DiviCom is a subsidiary of C-CURE Microsystems, Inc. ©1999 DiviCom Inc. All rights reserved.

[www.divi.com](http://www.divi.com)

North America +1 408 490 6560

Europe/France +33 1 4862 9212

Europe/UK +44 1753 714 367

Latin America +1 561 692 1131

Asia Pacific/HK +852 21921799



Open Solutions for Digital Television

DVB • ATSC • HDTV • SDTV • 4:2:0 • 4:2:2

Circle (113) on Free Info Card

See DiviCom and Harmonic at NAB Booth # S5539

[www.americanradiohistory.com](http://www.americanradiohistory.com)

will require re-authentication before they can be viewed. What makes this nice for the content owner is that authentication can be deferred via a cash card; when you have access to a network, the transaction can be completed, or if you already own the rights, the fee will be credited back to the card.

As you might expect, there is virtually no interoperability among today's bit-streams that exist today (digital cable, DBS, DVD or DTV). Each one of these "standards" is based on the popular MPEG-2 compression and encoding scheme, but proprietary additions make it nearly impossible for one system to work with another, even when it is similar.

A good example of digital delivery is our country's direct to home (DTH) services. A subscriber can go nearly anywhere in the U.S. and receive good pictures. However, the integrated receiver decoders of the two surviving DTH companies, DirecTV and EchoStar, are not compatible. There is really no reason for these differences as conditional access; subscriber management systems and smart cards are all that is necessary to confine reception by a subscriber to what the provider is being paid for. Cable is far worse in terms of compatibility, there are more than 80 different STBs and encryption systems used in the cable industry.

The major Hollywood studios have not agreed on whether or how the 5C system will be used and there is still no guarantee in the end that Hollywood will agree to copy protection protocols of any kind, in time. Reports are that 20th Century Fox doesn't think 5C is secure enough. Other studio moguls may be comfort-

able with 5C but resent the idea that the industries have decided to deploy it before they have "worked out arrangements" with the studios. While another faction feels that this is premature as all the standards have not been set, giving them much less flexibility in "negotiations." The last time Hollywood geared up to fight technology was back in 1984, when it lost a Supreme Court battle to ban the home video player, but today the story could have a much different ending. This time the industry has the Digital Millennium Copyright Act (DMCA), of 1998. This sleeper gives copyright owners unprecedented control over products such as DVDs or CDs. What makes this law such a wicked weapon is that it gives the entertainment industry content control even after the

products have been sold and extends over previously legal actions.

One entertainment attorney this could make the use of your VCR illegal, because they can be used to tape copyrighted TV shows or movies. In fact, according to the judicial reading of the Digital Millennium Act, virtually anything that circumvents copy protection is illegal.

It is small wonder that motion picture interests are gearing up to wage war on the open-source culture in general. I have been told that two such industry trade groups are the Motion Picture Association of America (MPAA) and the DVD Copy Control Association (DVD CCA). ■

---

## Exposure deadline looms

**T**he Federal Communications Commission (FCC) recently issued a Public Notice to remind license holders of the rapidly approaching Sept. 1, 2000 deadline about the compliance to human exposure to radio frequency (RF) signals regulations.

There is little doubt that most RF transmitters must already be operated in compliance with the FCC's human exposure to RF signal rules, but certain "devices, facilities and operations" could have postponed compliance until this final date of September 1, 2000. The applicable law is 47 CFR 1.1307(b)(1) - (b)(3). In the notice the FCC points out that if you are not in compliance with the provisions of that law, get your act together and do it or

grantee you are taking appropriate action to comply. If it's going to take you longer than the Sept. 1 deadline, then you have to file an Environmental Assessment (EA) with the Commission, but no later than Sept. 1, 2000. The FCC says, "It is your responsibility."

If an EA is required, the FCC says the obligation to file it falls on the licensee presently holding the permit/license to transmit, or the party presently holding the grant of equipment authorization. The FCC points out that: "With respect to antennas located on fixed structures, it is the responsibility of the respective licensees, not the tower owners," to do and file EAs, when required. But that's not all; EAs should include non-RF environmental issues as well.

# Planning a purchase?

## [www.broadcastengineering.com](http://www.broadcastengineering.com)

### for the best in technical information

**broad experience, broad ability... broad cast.**



Knowledge, experience, understanding and foresight have made us one of the world's most successful broadcasters.

This expertise is now available to you.

We've assembled the best broadcasting, new media and commercial consulting talent to form our new consulting & projects group.

Let us add insight, innovation and inventiveness to your vision.

See us at **NAB booth S3727.**

**new media, new technology... new opportunities.**

consulting & projects

**B B C** Resources

to access:

+44 (0)8700 100 883

[www.bbcresources.com/consultancy](http://www.bbcresources.com/consultancy)

Circle (114) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

You can choose to ignore all this. But if you do, and the areas you are responsible for are found not to be in compliance with RF exposure guidelines, or if you have failed to file the required EA, you could be fined or face FCC action.

It is important to note that the FCC's RF exposure rules apply to "all facilities, operations and devices" regulated by them. While a given facility, operation or device might, for whatever reason, be excluded from routine evaluation for RF exposure; it must still comply with the FCC's exposure guidelines.

The impetus for this "safety limits for human exposure to RF emissions" business finds its genesis in the rules the FCC adopted in August 1997. The effective dates for implementation were staggered over a three year period and specifically included devices such as cellular and PCS telephones, other transmitting facilities and operations, including the Amateur Radio Service. For those authorized or licensed by the Commission prior to the timetable, the FCC gave a break and

said: "All existing transmitting facilities, operations and devices regulated by the Commission must be in compliance by Sept. 1, 2000, or, if not in compliance, file an Environmental Assessment."


Unless you are an ecologist, the chances are fairly good that you don't know what an "Environmental Assessment" is. An EA is "a formal document required by the National Environmental Policy Act whenever an action may have a significant environmental impact," so says Section 1.1311 of the Commission's rules. This is where you can find out what information must be included in an EA.

The FCC requires that an EA "accompany all applications for licenses, renewals or other Commission actions when there is evidence of environmental impact for a variety of categories." The FCC says they need the EA to determine whether the environmental impact described is significant and if further action is needed to minimize or eliminate the environmental effect. ■

## Lookout HDTV! What's next?

The National Association of Broadcasters announced in February that with the addition of KNXV-DT in Phoenix and WRDW-DT in Augusta, GA, the number of digital stations nationwide had reached 119. Looking at total digital penetration into the U.S. market, NAB further says that U.S. digital television now reaches 61.28 percent of all TV households nationwide. With not even 7.5 percent of the full power television stations in the US offering digital service, one would think that concentration would be devoted to developing this technology and all the benefits that digital television has to offer.

According to Hitachi America, that's only the beginning. Gerard Corbett, senior marketing manager at Hitachi America in Millbrae, CA said the company has developed and sold the next generation "stereoscopic cam-

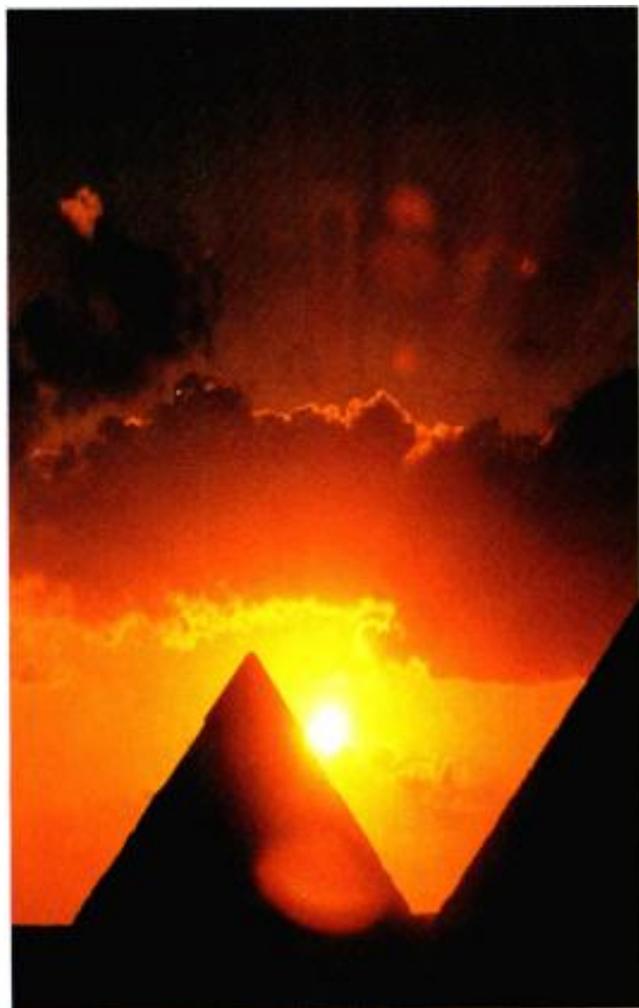

Like all great things, it's built to last.



Our Pro Patch™ Audio Bay is so reliable, some might call it the eighth wonder of the world. Engineered to the industry's most exacting standards, it simply won't fail. Plus, you get unique, proven features like our longframe and bantam jacks with self-cleaning crossbar contacts, and our new, time-saving QCP IV punchdown system. So, if you're looking for an audio bay that's designed to last a lifetime and then some, try a Pro Patch™ Audio Bay. It'll never let you down.

To learn more about Pro Patch™ Audio Bays, call 1-800-726-4266. Or visit us at [www.adc.com/propatch](http://www.adc.com/propatch).

Something Really Big is Coming ...  
NAB 2000 Will Reveal All.




See us at NAB Booth #L 543

Circle (116) on Free Info Card

New

# THE ROUTE TO DTV

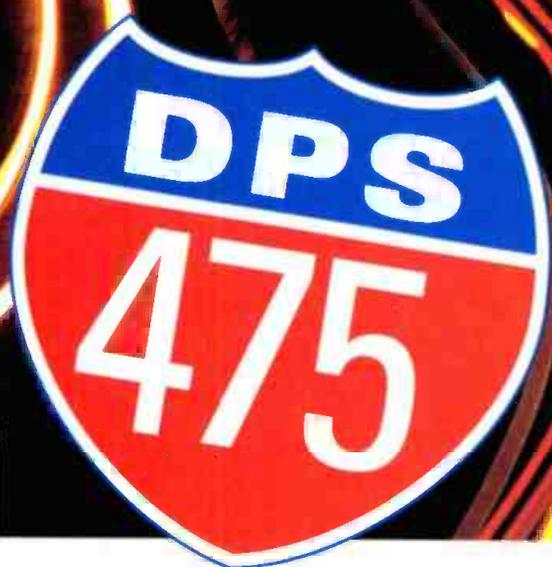

## What's So Special About This DPS Synchronizer?

- 12-Bit Component Digital Video Processing
- Proprietary Multi-Mode Adaptive Comb Filter Decoder
- Built-in Animated AV Logo Inserter
- Digi-Duplex Mode Provides Bi-Directional Analog/Digital Interface
- Adjustable Spatial and Temporal Digital Noise Reduction
- Integrated Video Framestore with Linear Keyer
- Adjustable Digital Bandwidth Filtering
- Enhanced Digital Test Pattern Generator with Zone Plate
- DV (1394) I/O Option



## Multi-Format AV Synchronizer & More

From the beginning, DPS has defined the way networks, broadcasters and mobile operators interface analog sources to their DTV facilities. Our DPS-465 was the world's first multi-format 10-bit serial digital synchronizer. The DPS-470, with integrated four-channel digital audio, refined the concept and quickly became the industry benchmark. Thousands are in daily use throughout the world.

Our new DPS-475, with 12-bit component video processing and proprietary adaptive comb filter decoder technology, packs such an incredible array of features into its compact 1U chassis, that we hesitate to even call it a synchronizer. We'd like to call it the "DPS-475 AV Synchronizer, Animated Logo Inserter, Linear Keyer, Time Base Corrector, Framestore, Bi-Directional Transcoder, DV Interfacer, AV Test Signal Generator, VITS Inserter, MPEG Pre-Processor and Digital Audio Embedder/De-Embedder". For now, we'll just settle for "DPS-475". It's more than a synchronizer.



# DPS

dps.com  
800-775-3314



DPS and the DPS logo are registered trademarks of Digital Processing Systems, Inc. Specifications subject to change without notice

Circle (115) on Free Info Card  
www.americanradiohistory.com

era," the C-3Dvision HT, to C-3D Digital Inc. who claims to be the world's first 3D television network and 3D Internet media company.

There's a lot more to building a stereoscopic camera than just putting two identical cameras next to each other. The development of the C-3Dvision HT stereoscopic camera was a joint venture between Hitachi and C-3D Digital's camera designer, Ken Robings. Robings used two Hitachi HV-D27, three-CCD chip, digital video camera heads, and combined them with a proprietary C-3Dvision tracking system to form the "C-3Dvision HT."

#### What's stereoscope?

But who is "C-3D Digital" and what's a 3D stereoscopic network? According to Doug Stanley, C-3D Digital's General Manager, C-3D is a team of inventors who manufacturer and develop 3D imagery and virtual reality entertainment for television and the Internet. C-3D Digital operates C-3D Television, which Stanley says: "is the world's first

and only broadcast network to offer 24-hour, 7 days a week 3D stereoscopic programming."

C-3D Digital recently formed "3D.COM," which is a 3D virtual reality portal. It is set to launch later this year and will feature streaming video over the Internet,

## Hitachi America has developed and sold the next generation "stereoscopic camera," the C-3Dvision HT.

real-time online electronic video gaming and e-commerce solutions in stereoscopic 3D. 3D.COM also includes Strata software and the Hotel Movie Network.

The technology is relatively simple and not really new. Using their propriety Hitachi camera and lenses, C-3D Digital takes alternate fields from each of the two camera

heads and combines them into one 525 line 30 frame interlaced picture. When the material is played back, the video is fed through an infrared strobing device, which is triggered by the vertical sync pulses. This turns the right and left lenses of liquid crystal glasses the viewer wears, on and off, corresponding to the proper field that is on the screen.

Stanley said: "C-3D Digital is anxiously awaiting the opportunity to produce material, using our proprietary technology, in 1080i high definition television; the 16:9 aspect ratio and the sharper pictures will only enhance the stereoscopic experience."

For more information, visit [www.3d.com](http://www.3d.com).



Send questions and comments to: [larry\\_bloomfield@intertec.com](mailto:larry_bloomfield@intertec.com)

## The Broadcast Fiber Optic System That Does Just About Everything



### VIPER II™

The most widely used fiber optic system for television production and distribution just got better. With the most advanced electronics, electro-optics and packaging, the Viper II meets all challenges in your facility's video, audio and auxiliary communications. Name your fiber application—pre-fibered facilities, STLs, remote broadcasts, mobile field production, video backhaul, metropolitan video links—the Viper II handles the job.

- Multichannel video & audio
- HDTV serial digital video; 19.4 Mbps to 1.5 Gbps
- 601 serial digital video
- Wideband NTSC/PAL video
- 24-bit digitized audio or AES/EBU
- Intercom, 2-wire or 4-wire
- Data, including RS232, RS422, CCU
- Universal 16-slot card cage
- Rack mount or "throw down" modules

It's not just a broadcast system, it's a multifaceted tool that's flexible, affordable, and easy to use. It's the reason why more facilities that choose fiber, choose Telecast.



The world leader in fiber optics for broadcast production  
(508) 754-4858 • [www.telecast-fiber.com](http://www.telecast-fiber.com)

# DV 8. DV 12.

## Perfect balance despite the ups and downs ...



### ...of electronic reporting.

Compact digital cameras have become hugely popular. They are fast, light and highly versatile. But do they ensure a smooth take? How do you prevent vibration? What about fast panning? Special applications? Or shooting in dreadful weather conditions? You'll find that Sachtler provides the support you never had before for a digital camera. And including all the things you

expect from Sachtler: fluid damping in five steps, touch and go for speedy changes of location, and highly sensitive counterbalance – also in five steps.

You need to use a heavy lens? Or a lighting system? DV 8 and DV 12 have a carrying capacity of up to 10 kg/22 lb and 12 kg/26 lb. Even fast panning won't spoil your report.

**DV 8. DV 12. Because you have so much to report.**

**sachtler**  
corporation of america

55, North Main Street, Freeport NY 11520  
Phone: (516) 867-4900  
Fax: (516) 623-6844  
[www.sachtler.de](http://www.sachtler.de)  
3316, West Victory Blvd., Burbank, CA. 91505  
Phone: (818) 845-4446



Every scene is seen better  
with a Sachtler.



## New FCC EEO rules adopted

BY HARRY MARTIN

In April, the following new EEO recruitment and record-keeping requirements will become effective.

### Recruitment

The new rules provide broadcasters with the following two options ("A" and "B") to meet their basic obligation under the new rules to widely disseminate information concerning full-time job vacancies:

#### OPTION A

Recruitment measures:

- Send notices of each full-time job opening to qualifying organizations that request such notices; and
- Undertake two (for employment units with five to ten full-time employees) or four (for larger employment units) long-term recruitment initiatives within a two-year period, e.g. participation in at least four job fairs by station personnel who have substantial responsibility in making hiring decisions; hosting at least one job fair; co-sponsoring job fairs with women's and minority groups in the business and professional community; participation in scholarship programs directed to students desiring to pursue a career in broadcasting; sponsorship of at least two events in the community designed to inform the public of employment opportunities in broadcasting.

Record-keeping:

- Collect, but not routinely submit to the Commission: (i) listings of all full-time jobs filled, identified by job title; (ii) the recruitment sources used to fill each vacancy, including any organizations

which requested notification; (iii) the address, contact person and telephone number of each recruitment source used to fill each position; (iv) dated copies of all advertisements, letters, e-mails, faxes, etc. used to fill each vacancy; (v) documentation necessary to demonstrate performance of supplemental outreach initiatives, e.g. job fairs, mentoring programs; (vi) the total number of interviewees for each vacancy and the referral source for each interviewee; and (vii) the date each job was filled and the source that referred the hiree.

- Place in the station public file annually a report including the following: (i) full-time jobs filled during the previous year; (ii) recruitment sources used for those vacancies; (iii) address, contact person and telephone number of each recruitment source; (iv) recruitment source for each hiree; (v) recruitment source for each interviewee; and (vi) description of any other initiatives implemented during the previous year.

#### OPTION B

Alternative recruitment program:

- Design one's own broad and inclusive outreach program; and
- Demonstrate that the station is widely disseminating information concerning job vacancies by analyzing the recruitment sources, race, ethnicity and gender of the applicants attracted by its recruitment efforts.

Record-keeping:

- Collect, but not routinely submit to the Commission: (i) listings of all full-time jobs filled, identified by job title; (ii) the recruitment sources used to fill each vacancy; (iii) the address, contact person and telephone number of each recruitment source used to fill each position; (iv) dated copies of all advertisements, letters, e-mails, faxes, etc. used to fill each vacancy; and (v) data reflecting the recruitment source, gender, and racial/ethnic origins of applicants for each full-time job filled.

- Place in the station's public file annually a report containing the fol-

lowing: (i) full-time jobs filled during the previous year; (ii) recruitment sources used for those vacancies; (iii) address, contact person and telephone number of each recruitment source; and (iv) recruitment source, race, gender and national original for each applicant.

By June 1, 2000, every broadcaster must select one of these two options. The election statement must be filed with the FCC and placed in the station's public file.

### Reporting requirements

In addition to the new public file requirements stated for Option A and Option B above, broadcasters must file a Statement of Compliance (Form 397) every second, fourth and sixth year of the license term, on the anniversary of the date the station is due to file its renewal, stating whether the station has complied with the EEO Rule. Broadcasters must place a copy of their latest Form 397 in the public inspection file.

By Sept. 30 of each year, broadcasters also will be required to file, and place in their public files, a Form 395-B ("Broadcast Station Annual Employment Report"). These reports, which include detailed employment profile data as before, will not be used in evaluating EEO performance; rather, the FCC plans to use them to track overall industry performance under the new EEO rule.

At renewal time, stations must file a modified Form 396 ("Broadcast Equal Employment Opportunity Program") and submit the contents of their station's EEO public inspection file, described above, for the year prior to filing the renewal. Such public file materials (i.e. for the previous 12 months) also must be submitted midway through the license term by stations with 10 or more full-time employees. ■

### Dateline

The next deadline for the filing of biennial ownership reports will be February 1, 2001. The first annual ownership report will be due Sept. 30, and annual regulatory fees will again be due in mid-September.

Harry C. Martin is an attorney with Fletcher, Heald & Hildreth P.L.C., Arlington, VA.



Send questions and comments to: [harry\\_martin@intertec.com](mailto:harry_martin@intertec.com)

# The Broadcast Production Switcher That Redefines What Is Possible

- Eight Input Multi-Format Digital Component Production Switcher
- Advanced Chroma-Keyer with Key Color Spill Suppression
- Multi Channel 3D DVE and Warp Geometry Effects
- Real-Time Virtual Sets with 3D Video Reflections and Refractions
- Programmable Organic Wipes and 32-Bit Animating Graphics



**Air Command™**  
Live Broadcast  
Production  
Switcher

**Preditor™**  
Comprehensive  
Real-Time NLE

**Warp Engine™**  
Breakthrough  
Real-Time  
3D DVE

**TitleWave™**  
Sub-Nanosecond  
On-Air CG

**Panamation™**  
Paint, Animation  
and Compositing

**Deep Freeze™**  
Instant-Access  
Still & Clip Store



If there's one thing every video director wants, it's live production power—preferably lots of it. That's why broadcast professionals are raving about the unmatched capabilities of Trinity's



Air Command production switcher. Air Command's comprehensive real-time hardware design includes

everything that you'd expect from a traditional switcher, including multi-format I/O, built-in true color correction, flexible chroma, luma, and linear keying, RS-422 VTR control, eight GPI triggers, and separate video preview. But Air Command goes beyond these standards, with unparalleled real-time 3D visual effects, organic wipes, dramatic virtual set capabilities and flawless 32-bit animating graphics.

Of course, video production requires more than just a great switcher, and that's why Trinity includes a powerful real-time CG, lightning-fast still store and optional integrated clip store. In fact, Trinity delivers all the tools of live and post production in one integrated, easy-to-use system at a fraction of the cost of comparable gear. Visit our web site today to see for yourself just how far Trinity can take your productions.




**For more information or to locate a dealer near you, visit our web site or call today.**

[play.com/switcher](http://play.com/switcher)

Toll-Free 1-877-752-9591



Air Command, Predator, Warp Engine, TitleWave, Panamation, Deep Freeze, Trinity and their logos are trademarks of Play Incorporated. All other trademarks are property of their respective holders. Play is a registered trademark of Play Incorporated. Copyright ©2000. All Rights Reserved. The Trinity system and its components are covered by U.S. Patent Numbers 5,872,565, 5,978,876, and 5,941,997; other patents pending.

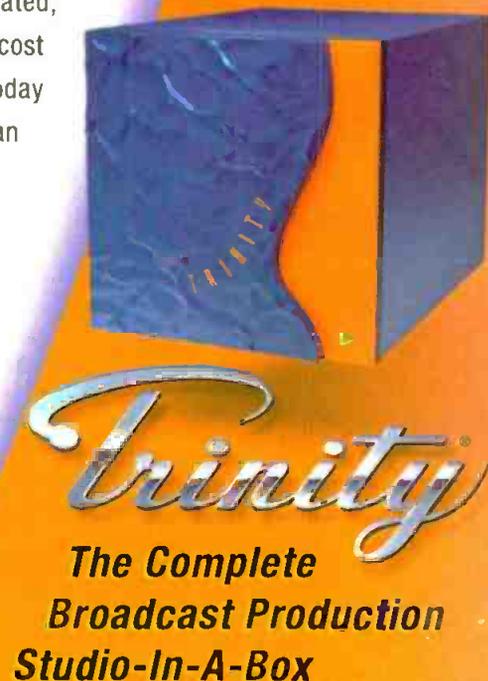

Circle (119) on Free Info Card

## Choosing a tape format

BY JIM SALADIN, SENIOR ASSOCIATE EDITOR

**C**hoosing a house tape format is one of the biggest decisions you can make as an engineer. Your choice, right or wrong, will live with you and your facility for years to come through legacy equipment, future questions of expandability and updatability, and archival content. Face it, you need to get this one right.

With nearly twenty digital formats



### VENDOR

Dave Wiswell,  
Panasonic

**S**electing a digital videotape format today is more complex than the VTR purchasing decision of a few years ago. Where previously, a VTR purchaser's biggest concern was

compatibility with other VTR users and cost. Today, with the emergence of DTV, there's a whole new paradigm to consider; there's no longer just one television image format, NTSC.

Today, any major purchase decision needs to factor in the transition to the new ATSC system, with its 18 different video formats. As the industry moves into the ATSC era, Panasonic is receiving great interest in a variety of image formats, including rapidly-growing interest in 480-line progressive, and three HD image formats – 1080i/60, 1080p/24, 720p/60, as well as standard-definition 480i. Selecting a new digital tape format wisely will include deep consideration and thorough research of this new multiple image format reality.

Videotape recorder design is a well-defined science today and customers should expect high-performance features and a high degree of reliability. However, buyers will need to take into special consideration their digital audio and metadata recording needs.

available, it's difficult to know what are the right questions to ask. Toward that end, we've posed the following question to representatives from the three major players in the tape format arena — Dave Wiswell from Panasonic, Tom Evans from Sony, and Juan Martinez from JVC — as well as Paul Black, an industry veteran who has just recently helped

The ATSC standard increases the need for audio channels in videotape machines. High-end VTRs may need to provide up to eight channels of high-quality digital audio.

Closed captioning and other digital signals used to be recorded in the VTR video's vertical interval. With ATSC, the vertical interval does not exist like it did with NTSC, so VTRs need to have some new capability to manage data signals like closed captioning. Because almost all modern digital VTRs use an image compression scheme that will destroy digital data signals, it is imperative that new digital tape formats include ancillary data recording. I strongly recommend that buyers consider their current and future metadata recording needs when purchasing their next digital VTR.

Videotape recorders should be based on extensible digital recording platforms that manufacturers will continue supporting and expanding for the extended future. DVCPRO is a good example. The digital video in a DVCPRO recording is directly compatible with computer video .DIF files, and applications, like computer networking, clearly demonstrate the different environments new tape machines will work in. A digital VTR needs to be extensible and offer compatibility with rest of the digital video world.

DV compression is an excellent example of a truly extensible system that works in digital VTRs, in multiple image formats, and at variable data

to define his station's format needs for the foreseeable future: *With the multitude of options in digital tape formats, what factors are the most important to consider when choosing a new house format?* ■



Send questions and comments to:  
[jim\\_saladin@intertec.com](mailto:jim_saladin@intertec.com)

rates: 25Mb/s, 50Mb/s and 100Mb/s. Each level is compatible with the other, because the same compression engine is used; simply putting compressors in parallel to increase video data rates.

DV has also become extremely popular in computer platforms as a compressed video format. This has occurred in large part to the expansion of consumer digital video, as well as its unique ability to be extended into the professional environment. DV's uniqueness is its acceptance by a wide segment of the digital video market, which has led to reductions in VTR prices and a better overall value for VTR users.

In addition to key factors like metadata recording and digital audio, purchasers should add these items to their VTR buyer's check list: the VTR's or format's proven reliability; the durability and quality of its recording tape; its compactness/weight and power consumption; its overall ownership and maintenance costs; and its unique benefits, like time-saving 4X real-time transfer to speed up NLE story editing and SDTI data transfers via ATM networks. Also, in your operation, you may require a range of recorders for different applications, so look for a format that can deliver extensive VTR choices from high-end production to entry-level. Finally, purchasers should compare each digital VTR format's interchange capabilities and future migration path.

*Dave Wiswell is group manager, VTRs, for Panasonic Broadcast.*

**SONY**

**“Once you get comfortable in HDCAM, you never want to go back.”**

—Angus Yates, Executive Producer for Discovery Channel's Eco-Challenge

A 300-mile race, 24 hours a day, through some of the toughest terrain in the Andes. Mountain-climbing, kayaking, canoeing, racing on horseback and on foot—a survival test for man, woman, and camcorder. Listen to Angus Yates, Executive Producer for Discovery Channel's Eco-Challenge.

“There were 20 Sony HDW-700A HDCAM® camcorders covering the shoot. Camera crews were spread out over 700 square miles of wilderness. It was nerve-racking, because nobody had ever taken HD equipment into an event like this. But the camcorders really had what it takes.”

Teams from over 30 nations raced the course, through some of the world's worst weather. “We got hammered. In the morning, it could be a blizzard with 100mph winds — by afternoon, the sun could be shining.”

When it was over, they had 600 hours of incredible HD images shot from both ground and aerial vantage points. They also edited in the field, logged

footage and fed daily uplinks. And as you'd expect from Sony, all the equipment came back in perfect working order.

“On a complex human adventure drama, it only makes sense to use a “future-proof” format. Sony HDCAM technology makes this the leading format to originate in. And the HDW-700A has a human engineering component that's remarkably like Betacam®, so even guys who hadn't worked in HD before quickly felt right at home. And once you get comfortable in HD, you never want to go back. Working in HD, shooting, editing, on-line production — it makes you feel like a filmmaker again.”



**HDCAM**

1-800-472-SONY ext. ECO  
[www.sony.com/professional](http://www.sony.com/professional)

**COMPLETE  
THE  
PICTURE**

© 2000 Sony Electronics Inc. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Sony, Complete The Picture, Betacam and HDCAM are trademarks of Sony. Features and specifications subject to change without notice.



Will your Olympic cha  
look like a bunch of jerks?

# mpions

**Jerky pictures are a common problem with conventional standards conversion. Not to mention smear, judder and break-up.**

**And that's no way to show the finest moments in sport.**

**The answer is Alchemist Ph.C from Snell & Wilcox. Uniquely equipped with powerful "phase correlation" motion compensation technology, it's the most advanced standards converter ever built.**

**No wonder it's used by the world's leading broadcasters and facilities to create virtually transparent results.**

**With CleanCut™ software to overcome the blurring caused by edits and RollTrack™ for perfect lip-synch, Alchemist Ph.C completely outperforms all competitors.**

**So if you care about picture quality, take the plunge and upgrade to Alchemist Ph.C.**

## **Motion Compensated Standards Conversion**



**ALCHEMIST PH.C - MOTION COMPENSATED STANDARDS CONVERTER**

THE ULTIMATE IN TRANSPARENT CONVERSION, WITH PHASE CORRELATION MOTION COMPENSATION, 27 MHz INPUT OVERSAMPLING, FULL 10-BIT, ALL-DIGITAL SIGNAL PATH AND PROPRIETARY 24 POINT INTERPOLATION APERTURE.



**ALCHEMIST PH.C TX - TRANSMISSION APPLICATION OPTION**

EQUIPPED AS ALCHEMIST PH.C, THIS IS THE COST-EFFECTIVE SOLUTION FOR TRANSMISSION APPLICATIONS WHERE MULTIPLE CHOICE OF INPUT AND OUTPUT STANDARDS ARE NOT REQUIRED.



COMPATIBLE WITH ROLLCALL, THE INTELLIGENT BROADCAST MANAGEMENT SYSTEM FROM SNELL & WILCOX.

Circle (120) on Free Info Card



**SNELL & WILCOX**



**Engineering with Vision**

Tel: 408 260 1000 [www.snellwilcox.com](http://www.snellwilcox.com)



**VENDOR**

Tom Evans, Sony

For any video company — from a one-person wedding videographer to the largest global newsgathering organization — choosing a house format is a mission-critical decision. It impacts the

long-term value of your content in so many ways.

You need compatibility with future distribution formats. You want the assurance of compatible players and systems well into the future. And you absolutely need a format with the archival stability to protect your recorded assets. Another crucial consideration is the form factor. Smaller media — or longer recording times for a given media size — correspond to lower storage and archiving costs.

As a leader in both video recorders and video recording media, Sony is uniquely qualified to offer guidance. For 50 years, Sony recording media engineers have worked side-by-side with its hardware engineers to refine track widths, design head gaps and ensure robust, reliable performance. With this background, we can make some general recommendations.

- **Think digital.** Acquisition and production must keep pace with the quality of distribution channels. In the age of DTV, DSS and DVD digital distribution, only digital formats will do.

- **Think metal.** As the first to introduce metal particle videocassettes, Sony has created the key enabling technology demanded by today's high-quality, complex recording needs. Sony has maximized capacity and durability performance through continued refinement of metal media.

- **Think compression.** Compression is an enabling technology that allows digital video recording to be more affordable, cost-efficient, practical and convenient. Without compression, recording times are far shorter and running costs are far higher.

*Tom Evans is vice president, Marketing for Sony Electronics' Media Solutions Company*



**VENDOR**

Juan Martinez, JVC

Broadcasters choosing high-quality digital video equipment as a "house format" must consider three mission-critical determinants: quality, reliability and upconversion for HDTV.

JVC conceived of its 50Mb/s 4:2:2 component digital D-9 as the logical format to take the industry into the digital future and, ultimately, to HDTV production and broadcasting. With high-resolution 4:2:2 digital sampling, and the ability to record 480/30p signals in 16:9 aspect ratio, D-9 is DTV ready today.

One of the core design elements in D-9 is the choice of 1/2-inch tape. Like the majority of other high-end formats (D3, D5, Digital Betacam), D-9 relies on half-inch tape because it allows for the recording of a vast amount of data — including the high data capacity required for HDTV television — but also for the additional strength and reliability it offers. D-9 uses metal particle tape for high performance and reliability, and because it allows users the ability to record up to 124 minutes of recording time — even in the field.

JVC designed D-9 for ease of maintenance and high reliability. Designed around a proven tape transport mechanism and with a low mass inner

drum assembly that minimizes head-wear, JVC's engineers got it right in their design of D-9. From genuine sapphire tape flanges to ceramic tape guides, the inner workings of the D-9 machine were designed to provide maximum image quality and low maintenance costs.

The broadcast and production industries are quickly marching toward 16:9 digital television. Once again, the choice of 50Mb/s, data-rich 4:2:2 digital sampling, mild 3.3:1, I-frame only DV compression and half-inch tape is proving to be a strong method for moving seamlessly into DTV broadcast. Because of its data-rich 4:2:2 digital signal processing and mild compression, tapes recorded in standard-definition D-9 achieve a richness of color and a striking clarity when mastering on MPEG-2 or upconverting to HD — an essential for producers and broadcasters alike.

D-9 is capable of accepting 480/30p signals for digital broadcast and multicast. Looking ahead to HDTV, artifact-free, data-rich 4:2:2 images look astonishingly good when upconverted to HD. This allows today's D-9 equipment to work well within today's infrastructure, and to maintain its usefulness and functionality as the industry progresses toward high-definition. D-9 users will have full use of existing tape libraries when the industry shifts to HDTV.

*Juan Martinez is manager of Digital Recording Formats for JVC.*



**EXPERT**

Paul Black, KPIX

The criterion that you apply to choosing a digital tape format is much the same as that you would use in choosing any tape format. We'll get to the specifics in a moment, but first, a broader

question has to be answered; is tape on it's way out?

We're all aware that some industry prophets are telling us that tape is dying, and that nonlinear editing and hard disk storage is the wave of the future. Does

this spell the end for magnetic media? Absolutely not. Keep in mind two sets of facts about acquiring and editing video, any video, including any form of high-definition.

First, tape is going to be around for a long time. It will remain the media of choice in broadcasting for field acquisition and editing. It also continues to have a variety of advantages for use pertaining to in-house storage and retrieval. Nothing else has the reliability, familiarity, and convenience of use for most broadcasters.

Second, although the cost of maintenance on tape-based equipment can be very high, the necessary maintenance is a known factor. Any tape machine

# SONY'S 1/2-INCH MIGRATION STORY

*Protection of legacy assets  
has always been – and continues  
to be – a cornerstone of Sony's  
1/2-Inch Platform.*



140 Mbps



HDTV  
SDTV

90 Mbps



50 Mbps



18 Mbps



10 Mbps



BIT RATE

1/2 INCH PLATFORM

DIGITAL  
MULTI  
PLAYER  
(HD)



PLAYBACK  
CAPABILITY


DIGITAL  
MULTI  
PLAYER  
(SD)



PLAYBACK  
CAPABILITY



SONY.

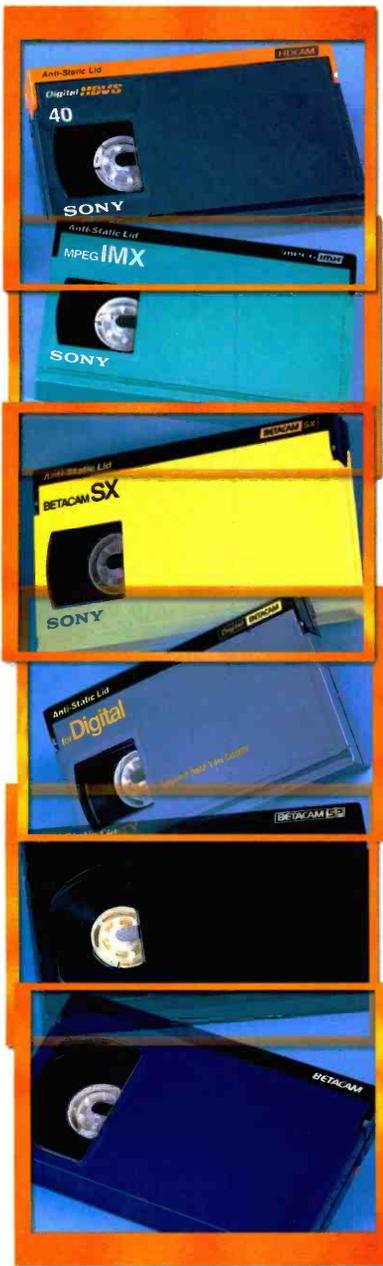

## 1/2-INCH FORMAT

Engineered for Evolution

SPECIAL ADVERTISING SUPPLEMENT

[www.americanradiohistory.com](http://www.americanradiohistory.com)

Engineered for Evolution  
**1/2-INCH FORMAT**  
Engineered for Evolution

## SONY'S HALF-INCH PLATFORM:

### THE WHOLE STORY.

The world of television has dramatically changed since Sony launched the original Betacam® half-inch format. For a decade and a half, the industry has seen unceasing innovation in Electronic Newsgathering (ENG), Electronic Field Production (EFP), studio production and postproduction. We've now embarked on a protracted transition from Analog to Digital Television — one that will see a long-term coexistence of both. And we face the looming transition from broadcasting a single channel to multicasting digital SDTV and HDTV, both heavily predicated on digital compression technology.

Different manufacturers have taken quite different approaches to these changes. Sony has chosen to steer a single half-inch recording platform through eighteen years of transition and growth. Throughout, we've insisted that those in the television program-making business who have chosen Sony's Half-Inch Platform should not be disenfranchised — regardless of their migration path. Over the years, Sony has followed a consistent strategy:

- To protect legacy half-inch program material, now numbering over 150 million tapes.
- To maximize flexibility in industry migration.
- To mobilize the most contemporary technologies and industry standards.

This remains our central strategy.

## HALF-INCH GOES PROFESSIONAL:

### BETACAM RECORDING.

In 1982, Sony proposed to the SMPTE Working Group on Half-Inch Recording a component analog system. Based upon the new CCIR component set, this was the first Y, R-Y, B-Y recording system. Called the Betacam format, it astonished the industry with superb acquisition images and rich color bandwidth. And it forever transformed the world of ENG and EFP.

Betacam equipment triggered the rapid adoption of component analog postproduction. And that soon stimulated demand for more robust multigeneration recording. Sony responded with metal particle tape, new recording heads and improved signal processing to create the Betacam SP® system. Over the next six years, Betacam SP equipment propelled component thinking and component postproduction systems worldwide.



*The advent of component video recording radically changed television production.*



1986

**BETACAM SP**  
Analog Component  
PostProduction  
ENG and EFP

1983

**BETACAM**  
CCIR Rec 601  
Analog Component  
ENG and EFP

Engineered for Evolution




## HALF-INCH GOES HIGH DEFINITION:

### HDCAM RECORDING.

Sony has been building commercial high-definition equipment since 1984. Sony equipment stood behind landmark HD productions in feature films, commercials, music videos and mini-series. Based on this experience, our concept for HDCAM® recording was simple. With the analog Betacam format as a model, Sony understood that a highly mobile camcorder and a cost-effective, “workhorse” editing VTR would spur broad adoption of high definition production. This, in turn, would help propel the much-needed creation of DTV program material.

Once again, Sony designed a camcorder and a VTR in concert — operating on the same half-inch recording platform. The HDCAM format was introduced at NAB'97 and the first product was delivered late that year. The world's first all-digital high definition camcorder electrified the industry. At long last, HDTV had broken out of the studio to become as mobile as contemporary SDTV.

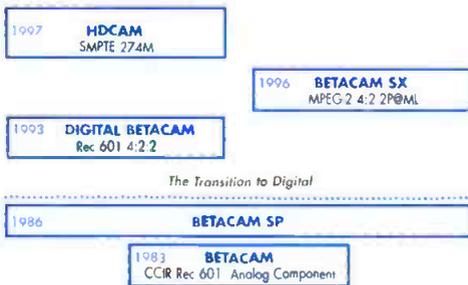

*Like Digital Betacam recording, the new HDCAM system used a proprietary compression algorithm, as no standardized algorithm had yet been created for HD.*

## HDCAM RECORDING AS A SYSTEM:

### EFFICIENT HD PROGRAM CREATION.

The genius of HDCAM recording lies in its Bit Rate Reduction. The data rate is not much higher than that of Digital Betacam recording. This results in efficiency beyond any previous HD system:

- A compact, HD camcorder with 40-minute recording and exceptional integrity under all sorts of environmental conditions.
- A portable VTR capable of 124-minute recording in the field.
- Routing and distribution of HD material through standard 270 Mbps routers.
- High recording efficiency on disk-based servers and Digital Disk Recorders (DDRs).

In short, HDCAM was developed as a working system to facilitate practical DTV production. The low data rate enabled Sony to base HDCAM equipment on the successful Digital Betacam hardware. HDCAM equipment duplicated the successful operating features of Digital Betacam equipment. The resulting economies of scale also made HDCAM equipment remarkably cost-effective. This has been particularly noted by many filmmakers who see HDCAM acquisition as a powerful new creative alternative to motion picture film origination.



1997  
1996  
1993

#### HDCAM

SMPTE 274M

#### BETACAM SX

MPEG-2 4:2:2@ML

#### DIGITAL BETACAM

Rec 601 4:2:2



#### BETACAM SP

#### BETACAM

CCIR Rec 601 Analog Component

**Engineered for Evolution**



**2000**  
**HDCAM 24P**  
 ITU 709  
 Multi Frame Rate  
 24P/25P/30P & 60i/50i  
**PRIME TIME  
 PRODUCTION AND  
 MOVIE-MAKING**

**2000**  
**MPEG IMX**  
 MPEG-2  
 4:2:2P@ML & HL

**1997**  
**HDCAM**  
 SMPTE  
 274M  
 1080/60i  
**MAINSTREAM DTV**

**1996**  
**BETACAM SX**  
 MPEG-2  
 4:2:2P@ML

**1993**  
**DIGITAL  
 BETACAM**  
 Rec 601  
 4:2:2

**TRANSITION TO DIGITAL**

**BETACAM SP**

**1986**

**BETACAM**  
 CCIR Rec 601  
 Analog Component

**1983**

## THE SUCCESS OF HDCAM RECORDING:

### HD PROGRAM CREATION.

Measuring the success of 1080/60i HDCAM equipment is easy. Simply consider the wide array of premier programs already created or being created in the HDCAM format:

- Over 12 current primetime episodics are being posted in the HDCAM.
- Four HDCAM camcorders shot 960 hours to produce twenty-two episodes of the prime time production "The Secret Adventures of Jules Verne."
- Discovery Channel took 20 HDCAM camcorders to the Andean peaks to cover the 1999 Eco-Challenge race.
- In July 1999, an HDCAM camcorder captured stunning images from NASA's Space Shuttle as it deployed the Chandra X-Ray telescope.
- Woods Hole Oceanographic Institute brought back images from 3000 meters under the ocean.
- No less than six feature length movies, including: "Solid Ones," "Seven and a Match," "Last Mountain," "Divorce the Musical," "Pride and Peril" and "Ivansxtc."

With more than 250 1080/60i camcorders now in the U.S. marketplace, the HDCAM format is leading the wave of HD production for the DTV era.

## THE HDCAM FORMAT GROWS:

### HDCAM COMES OF AGE.


The HDCAM format soon became a *living* system – one that would branch out to encompass all the complexities of the evolving digital HDTV and SDTV era.

- The HDCAM system established the final major bridge between motion picture film and digital acquisition — with its 24 frames per second, progressive scan (24P) variant.
- The HDCAM format encompassed the world HD stage — heralding a new era of *switchable* 50/60 Hz HD acquisition equipment including interlace and progressive variants capable of operating anywhere in the world.
- HDCAM players would incorporate legacy playback of ALL our digital half-inch formats, as well as analog Betacam tapes.

## HALF-INCH GOES PROGRESSIVE:

### HDCAM 1080/24P.

The HDCAM format helped build the final, crucial bridge between HD and motion picture film. These two media converged on the long-established platform of 24 frames per second. The 24 frame progressive scan version of HDCAM equipment – HDCAM 1080/24P – was introduced at NAB'99 and the first product was delivered to the post community in the summer of that year. Once again, a 24P camcorder and an editing VTR formed the core system. Our 24P switchers, DMEs, editors, and HD displays simultaneously flanked this new HDCAM extension. In 1999, no less than eight major network DTV shows were posted in HDCAM 24P.

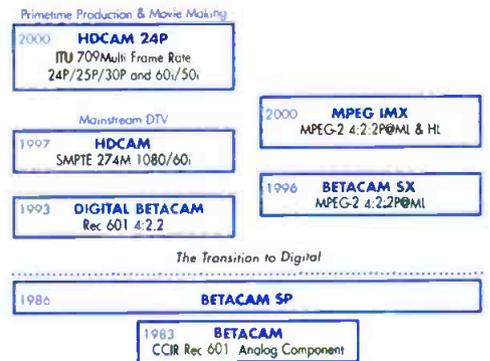

The addition of the 24 frame progressive version of HDCAM recording provides a tool for high-end DTV program origination that is traditionally shot on film.

## 24P HDCAM ACQUISITION:

### A SHOOTING AGENDA.

In 1995, Sony established a working relationship with Lucasfilm. Together, we explored the potential for Widescreen Digital Betacam acquisition in digital movie making. A series of tests including transfers to 35mm film established important benchmarks in image quality. Exposure latitude and color reproduction were judged to be fully satisfactory. Resolution, as expected, did not match that of 35mm film, but it was nevertheless encouragingly close. On this basis, Lucasfilm urged Sony to push hard on the development of the digital HD camcorder.

This collaboration helped establish the practical criteria for HDCAM acquisition to become a valuable adjunct to motion picture film. Central to this effort was the very high optical quality required in the lenses for the smaller 2/3-inch HDCAM image format. Sony turned to Panavision to resume a technical collaboration we had begun in the late 1980's with earlier HD studio cameras. This time, Panavision elected to invest significantly in the design of a range of totally new cinematography lenses specifically for the HDCAM camcorder. They also developed a full range of the accessories familiar to the film cinematographer. Lucasfilm and Industrial Light and Magic tested this total system through the past winter. Final versions of these products will soon be delivered to them. Lucasfilm is poised to begin shooting elements of the new "Star Wars" movie soon in Australia, Tunisia and Italy. Throughout 2000, significant new horizons in digital movie making will be explored by 24P HDCAM acquisition.

## HALF-INCH GOES GLOBAL:

### THE SWITCHABLE WORLDWIDE HDCAM SYSTEM.

The year 2000 sees DTV moving into high gear. The impact on program production is immense. The DTV agenda is also picking up speed in other regions of the world, and this, in turn, has significant implications for U.S. program production.

In June of 1999, following a decade and a half of international work within the ITU, a seminal agreement was reached on a worldwide high definition format for program production and international program exchange. Based squarely on the 1920 x 1080 digital format, this standard recognizes the world's diverse requirements in field and frame rates. The standard includes 60/50/30/25/24 Frame Progressive origination in addition to the all-important 60 and 50 Field Interlaced.

At NAB'00, Sony unveiled the first generation of HD products designed according to this standard.

The new HDCAM camcorder is the HDW-F900. Originally conceived for our 24P system, it quickly evolved into something more. It's the world's first truly global product — switchable among 30, 25 and 24-Frame Progressive, as well as 60 and 50 Hz Interlaced. That's right — it has five separate picture capture rates! This single unit can shoot HD in every region now moving into DTV: North America, Europe, Asia, and Australia. This is the camcorder now being evaluated by George Lucas and many others for digital origination of movies as well as prime time HD television production.



2000	<b>HDCAM 24P</b> ITU 709 Multi Frame Rate 24P/25P/30P & 60i/50i <b>PRIME TIME PRODUCTION AND MOVIE-MAKING</b>
2000	<b>MPEG IMX</b> MPEG-2 4:2:2P@ML & HL
1997	<b>HDCAM</b> SMPTE 274M 1080/60i <b>MAINSTREAM DTV</b>
1996	<b>BETACAM SX</b> MPEG-2 4:2:2P@ML
1993	<b>DIGITAL BETACAM</b> Rec 601 4:2:2
<b>TRANSITION TO DIGITAL</b>	
1986	<b>BETACAM SP</b>
1983	<b>BETACAM</b> CCIR Rec 601 Analog Component


Engineered for Evolution



## HALF-INCH GETS UNIFIED:

### THE HD DIGITAL MULTI PLAYER.

We've seen Sony's tiered approach to the Half-Inch Platform, with a variety of formats serving multiple needs. Now the digital marketplace is demanding the ability to move program material smoothly between HDTV and SDTV. The Half-Inch platform, common to both HD and SD formats, is tailor-made for this requirement. Sony's Half-Inch HD Digital Multi Player is equipped with universal playback capability for Betacam, Betacam SP, Betacam SX, MPEG IMX, Digital Betacam and HDCAM legacy tapes.

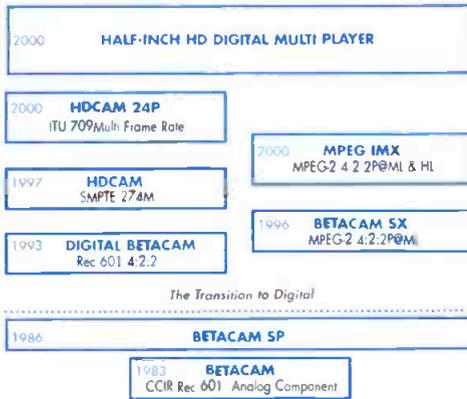


The new Half-Inch HD Digital Multi Player.

There's more. An up/down-converter board outputs both HD SDI signals and SDI signals. So pictures recorded in Standard Definition on any of these formats can all be internally up-converted to the 1920 x 1080 digital format and output as an HD SDI interface signal.

In the same way, HDCAM recordings can be down-converted to the 720 x 480 digital SDTV format and be output as an SDI interface signal. An optional card can even provide 720P HDTV and 480P SDTV outputs, for users who need these formats. With this player, Sony has built an important, cohesive and complete bridge between HDTV and SDTV.

The player is based on our new compact chassis — a mere four rack units in height. The player is also switchable between 60 and 50 Hz interlaced.

These features provide tremendous operational flexibility. They enable a multiplicity of migration paths to SDTV and HDTV programming. And as we've done in the past, Sony plans to support all of the half-inch formats for the long term, with no premature obsolescence. This way, all formats can remain valid for continuous acquisition, feeding and editing.

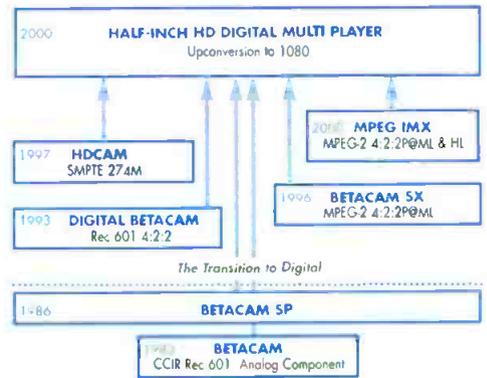

The new Half-Inch HD Digital Multi Player establishes a crucial bridge between SDTV and HDTV. It plays back Digital Betacam, Betacam SX, Betacam and Betacam SP tapes and upconverts each to the 1080-line or 720P formats, while maintaining compatibility with existing HDCAM tapes.

## HDCAM RECORDING:

### INTO THE FUTURE.

The HDCAM format continues to advance with these rapidly changing times. Broadcasters and program producers are emphatic about lowering the cost of HDTV equipment. Sony is prepared to develop HDCAM equipment to meet the need. Just as we did with Betacam analog camcorders, we plan to progressively evolve the HDCAM camcorders and VTRs. The ubiquity of the Half-Inch Platform supports economies of scale, for future cost reductions. Smaller, lighter, lower power-consumption camcorders — which will also cost less — are already in development.

**2000 HALF-INCH HD DIGITAL MULTI PLAYER**  
Upconversion to 1080

**2000 MPEG IMX**  
MPEG-2  
4:2:2P@ML & HL  
PLAYS IN MULTI FORMAT PLAYER

**1997 HDCAM**  
SMPTE 274M  
PLAYS IN MULTI FORMAT PLAYER

**1996 BETACAM SX**  
MPEG-2  
4:2:2P@ML  
PLAYS IN MULTI FORMAT PLAYER

**1993 DIGITAL BETACAM**  
Rec 601  
4:2:2  
PLAYS IN MULTI FORMAT PLAYER

**1986 BETACAM SP**  
PLAYS IN MULTI FORMAT PLAYER

**1983 BETACAM**  
CCIR Rec 601  
Analog Component  
PLAYS IN MULTI FORMAT PLAYER

**TRANSITION TO DIGITAL**

Half-Inch Format


## THE HOLY GRAIL OF HALF-INCH:

### THE FULL-BANDWIDTH MPEG VTR.

Even as the HDCAM format hits its stride as the High Definition workhorse, Sony is already planning for future HD requirements. The high-end post-production community seeks an HD VTR with even more advanced capabilities:

- Modest compression.
- Higher bit depth.
- Full bandwidth.
- More digital audio channels.
- Sophisticated Metadata capabilities.

Sony is developing such a machine. In the process, we're maintaining our allegiance to the evolving MPEG studio standards. The MPEG-4 committee is currently studying very high resolution, high bit rate, high bit depth systems. They are converging on an appropriate algorithm to compress such digital video with high performance. Sony is an active member of this committee and we await its outcome before committing to our final design. A standard is expected late in 2000.

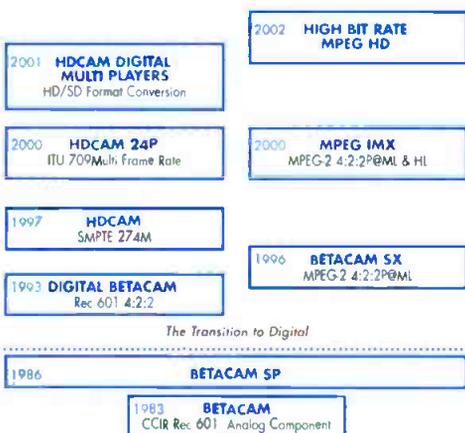

The coming High-Level Compression standard will support a High Bit Rate Half-Inch VTR. It will feature full bandwidth and modest compression for high-end postproduction.

But even as we wait for standards, one design decision is already clear. This new high bit rate VTR will embrace the Sony Half-Inch Platform. True to our tradition, it will have legacy playback of HDCAM tapes. We expect the HDCAM format to continue as the mainstay of mainstream HD acquisition and production, while the new machine supports the demanding requirements of high-end postproduction.

## SONY'S HALF-INCH PLATFORM:

### 18 YEARS ARE JUST THE BEGINNING.

Back in 1982, few could have predicted the diversity and complexity of today's television industry. The sudden proliferation of different digital HDTV and SDTV signal formats has posed significant challenges. Manufacturers had to deploy resources carefully, focusing on what might actually happen in the marketplace. Sony has worked hard to maintain close contact with all of our customers as they, too struggled with the dilemmas of the moment. Sony remains deeply involved in the evolving global standards for program production and distribution. Finally, the prior investments of Sony customers have always remained an immovable stake in the ground.

Our Half-Inch Platform strategy has steered through this maze with great care. We're proud of what we've accomplished. And we're confident in the path we've laid out for the exciting evolution of DTV.



2002	<b>HIGH BIT RATE MPEG HD</b>
2001	<b>HALF-INCH HD DIGITAL MULTI PLAYER</b> HD/SD Format Conversion
2000	<b>MPEG IMX</b> MPEG-2 4:2:2P@ML & HL
2000	<b>HDCAM 24P</b> ITU 709 Multi-Frame Rate
2000	<b>HDCAM</b> SMPTE 274M
1996	<b>BETACAM SX</b> MPEG-2 4:2:2P@ML
1993	<b>DIGITAL BETACAM</b> Rec 601 4:2:2
TRANSITION TO DIGITAL	
1986	<b>BETACAM SP</b>
1983	<b>BETACAM</b> CCIR Rec. 601 Analog Component

Engineered for Evolution

[www.sony.com](http://www.sony.com)

[www.sony.com/professional](http://www.sony.com/professional)

[www.sony.com/professional](http://www.sony.com/professional)

[www.sony.com/professional](http://www.sony.com/professional)

[www.sony.com/professional](http://www.sony.com/professional)

**COMPLETE  
T H E  
PICTURE**

**SONY®**

Sony Electronics Inc.

1 Sony Drive, Park Ridge, NJ 07656

©2000 Sony Electronics Inc. Reproduction in whole or in part without written permission is prohibited. All rights reserved. Features and specifications are subject to change without notice. Non-metric weights and measures are approximate. Sony, Betacam, Betacam SP, Betacam SX, HDCAM, and MPEG IMX are trademarks of Sony. Other trademarks are property of their respective owners.

V-1115

certain parameters that will need to be checked and adjusted for the machine to work. These parameters are well understood by broadcast engineers who have ever worked with videotape machines, regardless of format. So, because tape will be with us for a while yet, longevity is the first thing to look for in a digital format. If a format has a chance of early obsolescence, it might not do a good job returning its investment. The compression algorithm used is part of this decision, also. Choose one that will be around for a while. Avoid dying audio/video-encoding methods that have been migrated to tape use. Any tape format needs to show good audio and video quality, and digital is no exception. Always have the vendors or manufacturers leave you a machine and some tape for a couple of weeks, so you can see how it looks and works in your plant. (If they don't want to do this, beware. Something's being concealed.) This will allow you to see the playback on a monitor type that you are familiar with, and look at the composite output signal from the machine with a set of waveform/vector monitors you know well. Take an

"I'm from Missouri, show me" attitude with the manufacturer on the issue of quality.

A word about backward compatibility from digital to analog in machines; this is nice, but is it necessary to your operation? True, the ability to play those old oxide tapes in the new digital machine is handy, but after all, you upgraded to get away from some of the problems the oxide tapes caused in the first place. Keep a couple of the old machines around to use as "vault viewers" and use the new machines for more productive purposes.

Make sure there is more than one media manufacturer making the cassettes for the format. Some third-party tapes can be better than those from the manufacturer. Get some samples. All reputable firms will give out samples.

Look to see if there is more than one kind of camcorder available for the format. This usually indicates that a manufacturer has a solid commitment to the tape format and will be keeping it around for a while. If they're willing to do the R&D to field several cameras, that's a good sign they believe it'll pay them back to do so.

Notice that I haven't said anything about price yet? That's because you should factor that in last. You need to get a handle on the technical aspects of a tape format choice first, then start looking at price. Also, remember that new equipment prices are always negotiable. As one astute purchasing agent once said, "List price is for the price sheet printers, not the customers."

Finally, beware of headlife claims. One well-known manufacturer was claiming a 9000-hour headlife on a particular format. It turned out that you could get that kind of life, but only if you did no editing, shuttling, or other continuous handling. The claim applied only to straight record/play use. The reality was closer to 4000 hours maximum before replacement was necessary.

Yes, it's time to go to a digital tape format. Yes, there are many formats available. Yes, you can find one that will fit you just fine. No, I don't want your old two-inch high-band quad videotape gear, even if you will give it away free. Bury it. It's dead. ■

*Paul Black is acting engineering manager for KPIX-TV/CBS, San Francisco*

**See us at NAB Booth #L12912**



**New**

▶ Ni-Cd Time Battery




**New**

▶ NMH100 Time Battery



**New**

▶ Li-Ion Time Battery



▶ NMH60 Time Battery

**Superior products from the world's leading manufacturer**

▶ PAG Charger/Analyzers for all cell chemistries

**New**



▶ Revolutionary 2-in-1 Paglight camera light



**PAG**  
ADVANCED BATTERY SYSTEMS **USA**  
[www.pagusa.com](http://www.pagusa.com)

PAG USA (West Coast): 4545 Industrial Street, Unit 5B, Simi Valley, CA 93063. Tel 805/520-4911 E-mail [pagusa@aol.com](mailto:pagusa@aol.com)  
PAG USA (East Coast): 10993 Richardson Road, Suite 1 & 2, Ashland, VA 23005. Tel 804/798-7605 E-Mail [pagusa@erols.com](mailto:pagusa@erols.com)

Circle (121) on Free Info Card

April 2000

Broadcast Engineering

49

INTRODUCING

# THE OMNEON VIDEO AREA NETWORK

601

HD

DV

MPE

OMNEON  
VIDEO NETWORKS

IEEE 1394

SDI/SDTI

## The Only Integrated Networking and Storage Infrastructure

Finally, there's a digital networking and storage infrastructure that delivers the flexibility to connect leading distribution, production and media management technologies, via standard networks, to a secure pool of multi-format storage; the scalability to deliver more bandwidth in more formats to more channels and production suites than ever before; the compatibility to integrate seamlessly with your current systems so you can painlessly upgrade today, while equipping your operation for the future; price/performance sets a new value standard for the industry; and the power to handle the complexity of your world, while streamlining your operation. This unparalleled functionality, scalability and value makes the OMNEON VIDEO AREA NETWORK the ideal networking and storage infrastructure for the digital television marketplace.

PREMIERING AT NAB 2000 – NORTH HALL

AAF

AES

IP Data



Ethernet

RS422

Fiber

## Featuring

**Data-type Independence** - ITU 601, HD, DV, MPEG, OMF/AAF, AES, IP Data, Metadata **Linear Scalability** - Scales smoothly to hundreds of distribution channels and thousands of hours of storage  
**Shared-Storage Productivity** - Pooled, multi-format storage for collaborative production and distribution **Open Platform Compatibility** - Distribution, production and data management applications **Modular Architecture** - Scalable network components include Directors, Packet Switches, and MediaPorts **Reduced Cost-of-Ownership** - Lower acquisition cost, lower operational and maintenance costs **On-Air Reliability** - Both system-level and critical component redundancy **Increased Profitability** - Flexibility to exploit existing assets for new services

[www.Omneon.com](http://www.Omneon.com)





## The ATSC standard

BY MICHAEL ROBIN

The conventional television standards (525/60 and 625/50) and the related monochrome-compatible color encoding concepts (NTSC, PAL, and SECAM) represent a cost/performance choice based on the technologies of the 1930s, 1940s and 1950s. They were geared at reproducing acceptable quality, 4:3 aspect ratio pictures when viewed at six times the picture height. This is now identified as standard-definition television (SDTV). In the 1980s a great number of interested parties began developing concepts of advanced television, high-definition television or HDTV, geared at reproducing superior quality 16:9 aspect ratio pictures when viewed at three times the picture height.

The International Telecommunications Union (ITU) defines HDTV as follows:

“...[A] system designed to allow viewing at about three times the picture height, such that the system is virtually,

or nearly, transparent to the quality of portrayal that would have been perceived in the original scene or performance by a discerning viewer with normal visual acuity. Such factors in-

clude improved motion portrayal and improved perception of depth.”

A tall order indeed. Two main trends initially emerged:

- Japanese NHK: A 16:9 aspect ratio picture format of 1125 lines (1035 active lines) and 60 interlaced fields per second. This legacy format is described in the SMPTE 240M standard and its digital representation is described in SMPTE 260M. The video and audio

signals are transmitted to homes via an analog satellite technology better known as MUSE. This system is still on the air today but will be phased out in the not too distant future.

## A great deal of DTV's success will likely depend on the willingness of CATV operators to carry DTV signals in their original format.

- European HDTV: A picture format of 1250 lines and 50 progressive frames, part of an evolutionary (SDTV 4:3 to SDTV 16:9 to HDTV 16:9) multiplexed analog component (MAC) satellite transmission concept. This concept has been abandoned.

### The North American approach

The North American evolutionary approach took several years. In 1987 the FCC established the Advisory Committee on Advanced Television Service (ACATS) to advise on technical and public policy issues regarding advanced television. What resulted was that 23 different analog systems were proposed, falling under three general categories:

- Improved systems: Offering improved video quality within the parameters of NTSC.
- Enhanced systems: Adding additional information to the signal to provide an improved widescreen picture.
- High-definition television: Completely new systems with improved resolution, a wider aspect ratio and improved sound.


In 1990, in the midst of these never-ending discussions, a revolutionary event took place: General Instruments proposed the first all-digital system. In rapid succession three additional all-digital systems were proposed. By 1991

### FRAME GRAB

A look at tomorrow's technology.

## Telco and cable battle to provide residential high-speed Internet access

DSL will close the gap in subscribers

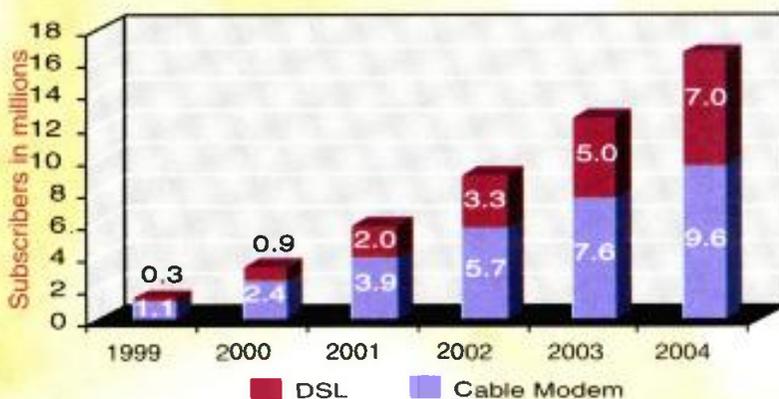

Source: Yankee Group [www.yankeegroup.com](http://www.yankeegroup.com)



digital newsroom

# News doesn't just break — it explodes

Hit the air instantly while your rivals crash and burn. Thanks to Leitch, now you can record multiple feeds, edit as you record and play back instantly with NEWSFlash™—our digital newsroom.

The instant news makes impact, you have to be ready to launch your crew into the action. The first one on air is reporting the news; everyone else is just reporting history. As every second passes, you're in danger of missing your target. Leitch's news server ensures that you never crash and burn by giving you direct, unrestricted access to our V-SAN—the Video Storage Area Network. Your crew can simultaneously record multiple feeds, edit complete packages, and instantly play to air. In no time you'll be shaping stories that used to remain up in the air. Your crew will be on the air before the competition loads its tapes. It's all possible with NEWSFlash™, the world's first Windows NT-based integrated editing system designed specifically for news. And you can simultaneously attack with your total squadron with BrowseCutter™, the only journalist workstation that allows your crew members to build rundowns, edit scripts, search news automation wires and browse digital video right from their computer desktops. The sky's the limit with Leitch's integrated news system. Call 800-231-9673 for more information or visit our website [www.leitch.com](http://www.leitch.com).



Using NEWSFlash, newsroom generals can coordinate with outside forces with nine compatible newsroom automations interfaces: ANN Nexxus "Newsmaker," AP ENPS; Autoque; CTV Baton; DCM; Generation Technologies; Newstar; AvStar; and Roswell.

Circle (123) on Free Info Card



International/Canada +1 (416) 445-9640, (800) 387-0233 • USA, East +1 (757) 548-2300, (800) 231-9673, USA, West +1 (818/888) 843-7004 • Europe +44 (0) 1483-591000

Hong Kong +(852) 2776-0628 • Japan +81 (3) 5423-3631 • Australia +61 (2) 9939-3355 • Latin America +1 (305) 591-0611 • Brazil +55 (11) 3159-0770

[www.americanradiohistory.com](http://www.americanradiohistory.com)

©2000 Leitch and VR are registered trademarks of Leitch Technology Corporation. All other trademarks are the property of their respective owners.

the number of proposed systems was reduced to six, including the four all-digital systems. In 1991 and 1992 these systems were exhaustively tested by the following laboratories:

- The Advanced Television Test Center, funded by the broadcasting and consumer electronic industries, conducted transmission performance testing and subjective tests using experienced viewers.

- Cable Television Laboratories, a research and development consortium of cable system operators, conducted cable transmission tests.

- The Advanced Television Evaluation Laboratory, a laboratory of the Canadian Communications Research Centre, conducted subjective assessment tests using non-expert viewers.

In 1993 a special panel of the ACATS was convened to review the results of the tests and, possibly, to choose a new transmission standard for terrestrial broadcasts. It took a week to reach the unanimous conclusion that an all-digital approach was both desirable and feasible. To avoid lengthy and intensive testing of four competitive all-digital systems the proponents of these systems formed the Grand Alliance, which was made up of AT&T, GI, MIT, North American Philips, Thomson Consumer Electronics, David Sarnoff Research Center and Zenith.

The tests took place in 1995 using modular equipment supplied by various members of the Grand Alliance and integrated at the David Sarnoff Research Center. In addition to the types of tests detailed above, these new tests included format conversions between various picture formats, compliance with MPEG-2 and subjective audio tests.

The development of the advanced television concepts were entrusted to the Advanced Television Systems Committee (ATSC), a private sector organization of corporations, associations and educational institutions. It was responsible for exploring the need for and developing the documentation of the Advanced Television (ATV) standard

based on the Grand Alliance recommendations. The ATSC added several standard definition formats resulting in a family of scanning formats as no single concept could be agreed upon. What resulted was the ATSC standard that was adopted and is being implemented by the FCC.

### Characteristics of the video system

The members of ATSC could not agree on a single picture format concept. As a consequence, the ATSC standard supports a range of program materials originating in different picture formats.

ACTIVE H-PIXELS	ACTIVE LINES	SCANNING MODE	FRAME RATE (Hz)*
640	480	PROGRESSIVE	60(60/M), 30(30/M), 24(24/M)
		INTERLACED	30(30/M)
704	480	PROGRESSIVE	60(60/M), 30(30/M), 24(24/M)
		INTERLACED	30(30/M)

\*M=1.001 IS A FRAME RATE DIVISOR FOR NTSC-FRIENDLY SYSTEMS

**Table 1. Specifications for ATSC formats using a 4:3 aspect ratio. These formats all use 480 horizontal lines and can be either progressive or interlace.**

SMPTE PRODUCT-ION STANDARD	ACTIVE H-PIXELS	ACTIVE LINES	SCANNING MODE	FRAME RATE (Hz)*
293M (PROGRESSIVE SCANNING)	704	480	PROGRESSIVE	60(60/M), 30(30/M), 24(24/M)
			INTERLACED	30(30/M)
294M (SERIAL INTERFACE)				
296M (SCANNING AND INTERFACE)	1280	720	PROGRESSIVE	60(60/M), 30(30/M), 24(24/M)
274M (SCANNING)	1920	1080	PROGRESSIVE	30(30/M), 24(24/M)
292M (SERIAL INTERFACE)			INTERLACED	30(30/M)

\*M=1.001 IS A FRAME RATE DIVISOR FOR NTSC-FRIENDLY SYSTEMS

**Table 2. ATSC has several options for displaying 16:9 pictures in both a progressive and interlace scanning format.**

Two program format levels, HDTV (720 and 1080 active lines) and SDTV (480 active lines), are represented.

Table 1 summarizes the 4:3 aspect ratio SDTV ATSC formats. The scanning mode may be progressive (P) or interlaced (I) and several frame rates are specified. The 4:3 aspect ratio SDTV formats are, respectively:

- VGA 640 pixels x 480 lines;
- A slightly modified CCIR 601 format (704 pixels x 480 lines). The modification consists in reducing the number of active pixels per line to 704 and active scanning lines per frame to 480. This is an MPEG-2 requirement to the effect that the number of active pixels

per line and active lines per frame be a multiple of the pixels and lines in a DCT block (8 pixels x 8 lines).

Table 2 summarizes the 16:9 aspect ratio formats. NTSC-friendly frame rates are obtained by dividing the nominal frame rate by M=1.001. The formats are, respectively:

- SDTV (704 pixels x 480 lines) modified to MPEG-2 requirements. The modification consists in reducing the number of active pixels per line to 704 and active scanning lines per frame to 480. This is an MPEG-2 requirement to the effect that the number of active pixels per line and

active lines per frame be a multiple of the pixels and lines in a DCT block (8 pixels x 8 lines). This format may use the P or I scanning mode at several frame rates. SMPTE Standards 293M (progressive scanning) and 294M (bit-serial interface) define the production aspects of the format.

- HDTV-A (1280 pixels x 720 lines). This format uses exclusively P scanning and is described in the SMPTE 296M standard.

- HDTV-B (1920 pixels x 1080 lines). I or P scanning at frame rates not exceeding 30Hz is used in this format. This restriction is due to the fact that a progressive 60Hz frame rate would result in an essential bit-serial rate of the order of 2.5Gb/s which exceeds the con-

temporary bit rate compression capabilities. SMPTE Standards 274M (scanning) and 292M (bit-serial interface) define several formats including 60Hz progressive scanning which, currently, is not an ATSC format.

Accounting for all picture scanning formats and frame rates there are 18 picture formats supported by the ATSC standard, based on the nominal frame rates of 60Hz, 30Hz and 24Hz. If we take into consideration the NTSC-friendly rates of 59.94Hz, 29.97Hz and 23.976Hz we end up with 36 picture formats. The latter frame rates will simplify interworking with NTSC material during the simulcast period.

See us at NAB  
Booth #L2048

# TAKING CLARITY WHERE IT'S NEVER GONE BEFORE!



PATENT PENDING.

**K Tech**  
TELECOMMUNICATIONS, INC.

KTech's 8-VSB DTV Translator receives an 8-VSB signal via on-air or cable, de-modulates to baseband data, corrects multipath errors by Forward Error Correction and Equalization techniques, and re-modulates the baseband data into a new 8-VSB signal.

A fresh copy of the original DTV signal is reproduced to extend your DTV coverage area.

15501 S F Mission Blvd. Ste 100 Mission Hills CA 91345 USA ph: (818) 361-2248 fax: (818) 270-2010 web: [www.ktechtelecom.com](http://www.ktechtelecom.com) e-mail: [sales@ktechtelecom.com](mailto:sales@ktechtelecom.com)

©2000 ktech telecom. All rights reserved.

Circle (124) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Audio

Audio characteristics are defined in the ATSC standard document A-52. The digital compression system, is a constrained subset of the AC-3 system developed by Dolby Labs. It encodes five full-bandwidth audio channels (3Hz to 20kHz) including left, center, right, left and right surround and one reduced-bandwidth, low-frequency en-

DESIGNATION	TYPE OF SERVICE	NUMBER OF CHANNELS	COMPRESSED BIT RATE kb/s
COMPLETE MAIN (CM)	MAIN AUDIO	1 TO 5.1	64 TO 384
MUSIC AND EFFECTS (ME)	MAIN AUDIO	1 TO 5.1	64 TO 384
VISUALLY IMPAIRED (VI)	ASSOCIATED	1	128
HEARING IMPAIRED (HI)	ASSOCIATED	1	128
DIALOGUE (D)	ASSOCIATED	1	128
COMMENTARY (C)	ASSOCIATED	1	128
EMERGENCY (C)	ASSOCIATED	1	128
VOICE-OVER (VO)	ASSOCIATED	1	128

**Table 3. Audio service for ATSC includes the main audio services at up to 384kb/s and associated services at 128kb/s.**

hancement (LFE) channel (3Hz to 120Hz). The resulting 5.184Mb/s datastream is compressed into 384kb/s. The LFE channel carries about 1/10 of the bandwidth of the other channels, so the AC-3 system is frequently mentioned as carrying 5.1 channels. Table 3 summarizes the audio service types contained in an AC-3 elementary stream.

## Compression

Table 4 shows the essential (active) bit rates of ATSC recommended production scanning formats, with 10 bits/sample resolution, before bit rate reduction and compression are applied. The total bit rates, including the samples in the horizontal and vertical blanking areas, are shown in brackets. The ATSC terrestrial transmission standard defines the bitstream content and transport and its digital transmission in a 6MHz TV RF channel. The nominal transmission bit-rate depends on the chosen digital RF modulation scheme. The ATSC chosen scheme, 8VSB, limits the transmission bit-rate to 19.4Mb/s. This constraint offers no other alternative but bit rate reduction and compression to accommodate all the ATSC formats.

The video compression scheme is based on the main profile syntax of the MPEG-2 video standard. It uses a motion-com-

pensated Discrete Cosine Transform (DCT) algorithm and B-frame prediction. The video encoder supports the wide motion estimation range needed for tracking fast-motion pictures. In addition it uses source-adaptive coding, field and frame motion vectors and other techniques to improve compression efficiency. In all ATSC suggested formats there is a possibility to transmit film material in

its native progressive 24 frames per second format and eliminate the 3/2 pull-down used in NTSC countries. This results in a reduction of the transmitted bit-rate, easing the task of the MPEG-2 encoder. The receiver reconstructs the interlaced or progressive display.

## Transmission

The ATSC system employs multiple picture formats, digital audio and video compression. The compressed video and associated audio data streams are packetized into a packetized elementary stream (PES). One (e.g. one HDTV program) or several (e.g. multiple SDTV programs) PES, along with auxiliary and control data as well as program and system information protocol (PSIP) are fed to a transport stream multiplexer which combines them into a 19.4Mb/s data stream. Packetization allows audio, video and auxiliary data to be separated into fixed-size units suitable for forward error correction, program stream multiplexing and switching, time synchronization. This offers flexibility and extendibility as well as compatibility with other formats.

The 19.4Mb/s datastream feeds a chan-

nel encoder which in turn feeds the RF modulator of the terrestrial transmitter operating in an allocated 6MHz RF channel. The ATSC chosen modulation scheme, 8VSB, typically provides adequate reception when outside, roof-top, reception antennas are used. In most locations, indoor antennas provide unreliable reception. The 8VSB modulation standard is incompatible with the modulation choices made by the cable operators. The incompatibility of the 8VSB transmission modulation with the CATV modulation schemes and the lack of enthusiasm of cable operators to carry DTV signals will likely put a damper on the sales of DTV receivers as about 70 percent of North American viewers are connected to cable. The use of roof-top reception antennas would likely remove some of the problems of introducing DTV. However, roof-top antennas are no longer common and are impractical, if not impossible, to use in large cities with many high-rise buildings. Alternate modulation schemes may offer more reliable reception under marginal conditions and passionate discussions are currently taking place concerning the acceptable modulation scheme.

The increasing availability of set-top CATV converters will make DTV signals available to NTSC receivers as well

ACTIVE (TOTAL) VIDEO FORMAT PIXELSxLINES	NOMINAL FRAME RATE (f/s)*	ACTIVE (TOTAL) NOMINAL BIT RATE (Mb/s)*
640 x 480 (840 x 525)	30 INTERLACED	184 (252)
	30 PROGRESSIVE	184 (252)
	60 PROGRESSIVE	368 (504)
720 x 480 (858 x 525)	30 INTERLACED	207 (270)
	30 PROGRESSIVE	207 (270)
	60 PROGRESSIVE	414 (540)
1280 x 720 (1650 x 750)	30 PROGRESSIVE	553 (742)
	60 PROGRESSIVE	1106 (1485)
1920 x 1080 (2200 x 1125)	30 INTERLACED	1244 (1485)
	30 PROGRESSIVE	1244 (1485)

FOR NTSC-FRIENDLY SYSTEMS THIS FIGURE IS DIVIDED BY M=1.001

**Table 4. Because of the high bit rates required by the various ATSC formats, MPEG-2 compression is used to reduce the bit rate to fit within the 19.4Mb/s datastream.**

as to DTV receivers with compatible interfaces. A great deal of DTV's success will likely depend on the willingness of CATV operators to carry DTV signals in their original format. ■

*Michael Robin, former engineer with the Canadian Broadcasting Corp. engineering headquarters, is an independent broadcast consultant located in Montreal Canada. He is co-author of Digital Television Fundamentals, published by McGraw-Hill.*

*“Angenieux provides us with the best of the best — in performance, features and support.”*



Dana & Michael Liman  
Liman Video Rental, Co.  
New York, USA



When Dana and Michael Liman of Liman Video Rental, Co. — the premier source for digital and HD video rentals in the East — decided to build the industry's first digital production, post-production and uplink truck, they already knew which lenses they wanted — Angenieux High Definition (HD) and High Resolution (HR) Series lenses. That's because Liman Video has received nothing but rave reviews on Angenieux lenses from their industry renowned clientele.



“Angenieux lenses deliver the sharpness and chromatic performance that meet all our technical requirements — and they work well with every camera we've tested,” said Dana Liman. “With Angenieux lenses, we're confident in providing the best image quality and ergonomics available.”

“Angenieux is taking high definition to the extreme,” according to Michael Liman. “Our broadcast, documentary and feature film clients converting to HDTV recognize Angenieux's extensive experience in film optics and insist on using their HD and broadcast lenses.”

For more information on Angenieux lenses, call 973 812 3858 - [www.angenieux.com](http://www.angenieux.com) - e-mail [angenieux@tctus.com](mailto:angenieux@tctus.com)

**angenieux**  
Securing your future.



## Virtual sets

BY BRAD GILMER

As the technology matures and as the economics of virtual sets become more compelling, virtual is set to become commonplace in the broadcast industry. You might have seen virtual sets used during NBA coverage on TNT, on the game show *My Generation* on VH-1, or perhaps in use at a network affiliate during election coverage. Virtual sets combine high-quality graphics rendering with chroma keying and advanced camera-tracking technology to allow real people to interact with computer-generated objects in a realistic virtual environment.

If you are one of the people who saw *Roger Rabbit* when it first came out, you may have been quite impressed with the interaction between the animated characters and real actors. The effects in the movie were spectacular, but the cost and production processes used were not viable for everyday applications such as game show production or live events. As computer processing power has increased, the ability to animate graphics in real-time has become a reality. The Cartoon Network was involved in one of the first broadcasts of an animated cartoon character that was rendered and broadcast in real time. A dog called Moxie was ren-



One of the advantages of virtual set technologies is that they are not limited to the size of the studio. Small studios can be used to the same advantage as large ones. Photos courtesy of Radamec.

tures such as eyebrows and the end of the character's nose. While a long way from a virtual set, the ability to manipulate a graphics image based upon telemetry gathered from external sources was a critical development.

In the mean time, chroma key technology was already well developed. Combining animated graph-

was not possible for the talent to interact with the objects in 3D space. A 3D weather map, for example, might look very realistic, but the talent could do little more than stand in front of it pointing to regions of interest. A second limitation was that if a 3D graphic element was supposed to be something real, such as a table, the effect was immediately ruined with any camera movement because the perspective of the virtual object remained unchanged. It became immediately obvious that the 3D object had been keyed into the scene.


Virtual set companies addressed these two factors in a way that allowed the talent to interact with objects, walking among them while camera angles changed in a way that makes the virtual elements look like they are part of the real scene. The first advance was to compute the position of persons in the real

## Personnel costs for virtual set designers and operators can be very high and should be part of any evaluation.

dered on an SGI platform and animated using inputs from an array of hall-effect sensors on an actor along with external controls that were used to manipulate other fea-

ical images with chromakey had been done for quite some time. This relatively simple combination of technologies had several weaknesses. First, while 3D graphic elements could be easily created, it

# Deadlines?

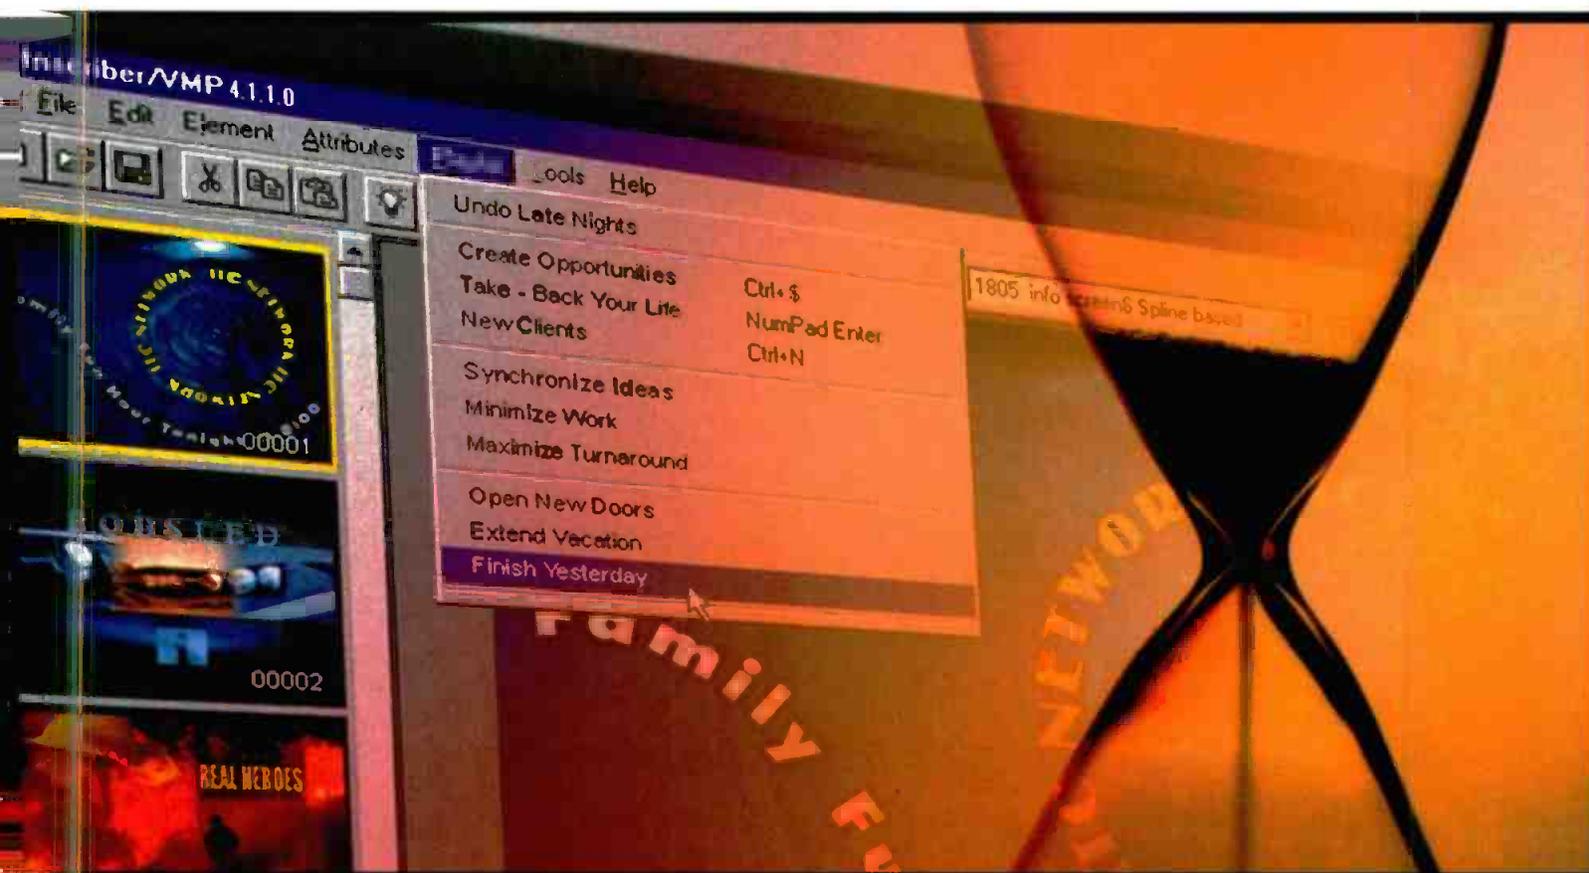

## Create. Deliver. Relax.

- Advanced Broadcast CG
- Paint System
- Image Store
- Realtime Motion Effects
- Event Sequencer

**NEW!**  
Ebyran file  
converter option  
available

Inscriber VMP Studio enables artists to **create** and **deliver** stunning graphics in a hurry by integrating 5 video tools into one powerful **NT-based solution**. VMP Studio also includes a revolutionary **timesaving template utility** designed for fast graphics creation.

Try out your **new** deadline assistant today. **VMP Studio 4.1**. Then get ready to **relax**.



**AT NAB 2000, VISIT INSCRIBER AT BOOTH S4751**

Circle (127) on Free Info Card



**inscriber**  
TECHNOLOGY

POWERFUL TELEVISION GRAPHICS TOOLS

INSCRIBER IS A REGISTERED TRADEMARK AND VMP STUDIO IS A TRADEMARK OF INSCRIBER TECHNOLOGY CORPORATION. OTHER PRODUCT NAMES MENTIONED MAY BE REGISTERED TRADEMARKS OR TRADE NAMES OF THEIR RESPECTIVE COMPANIES.

**For a free demo CD of Inscriber VMP Studio please call  
1.800.363.3400 or +1.519.570.9111, or visit [www.inscriber.com](http://www.inscriber.com)**

[www.americanradiohistory.com](http://www.americanradiohistory.com)

camera shot so that the rendering engine could figure out whether the talent was in front or in back of a rendered graphic element. The second advance was to equip cameras with an array of sensors that track everything from camera position in the studio to zoom and focus settings. By collecting critical information about the camera's position and settings, the rendering engine could calculate new 3D views of the rendered objects based upon its mathematical knowledge of what the view of the objects should look like.

It does not take a computer scientist to figure out that making the millions of calculations per second that can be required for real-time 3D rendering takes a lot of computer power. Early virtual sets required that the virtual elements be designed so that they were not too complicated for the compute engines involved. Even today, if the virtual elements exceed the capabilities of the processor, the elements may be incompletely rendered and animation of these elements will not be at 30 frames per second.

### Virtual set finances

Virtual sets are supposed to be much less expensive than using traditional sets. Is this really true? The answer, as with almost everything in life, is that it depends. For many applications, you can realize substantial savings by employing virtual set technology.

Since there is no physical set, you can save anywhere from \$50,000 to \$500,000, depending upon its complexity. Offsetting these fees are the fees charged by the graphic artists to create your virtual set. These charges can vary widely, but usual-

ly you will realize savings. Set design can run anywhere from \$30,000 to \$350,000 or more, but this runs the range from a simple news cut-in studio to an elaborate election suite. One important thing to realize is that your design fees, if anything, will be higher using virtual sets. Virtual sets can create new visual opportunities, and you are probably going to pay more to explore those opportunities.



The basic bluescreen backdrop of the set remains in place while a multitude of virtual environments can be keyed upon it, benefiting a station's bottom line through reduced set construction and removal costs.

Another area of real savings relates to the handling of sets. It is quite common for stations to have to tear down sets and move them to make room for other production activities. Not only are crew and storage costs involved, but the loss of studio time while it is being turned around for the next shoot is a real out-of-pocket expense if the facility is fully booked. While the sets are being changed, the facility cannot be used. Changing virtual sets requires loading a disk and usually changing some of the lighting in the studio, but this time is minimal compared to physically moving a set. The logistics of moving a set may also be a consideration, and represent a further loss of revenue. In union environments, a set change may result in a minimum crew charge

regardless of how long it takes to change the set.

The cost of hardware and software can range anywhere from \$40,000 to \$400,000 or more. Virtual set software can be run on a Windows NT machine, or on a very large SGI system. As expected, performance, complexity and features all increase with price. One thing is certain — the price/performance ratio of these systems

will continue to improve as this technology takes advantage of the major improvements in consumer-oriented hardware and software.

Personnel costs for virtual set designers and operators can be very high and should be part of any evaluation. You may get lucky and find a sharp college student who would work for a reasonable price, but in most cases, these designers and operators will be among the most highly compensated people on your production team.


Virtual sets offer a number of advantages that are hard to put into specific cost terms. They can appear to be quite large while, in fact, the size of the studio is very small. Virtual enables creative possibilities that have not been available before. While this has led to the overuse of the effect early on, as this technology matures, the real gains will be made in creating a believable virtual environment that decrease remote location costs and allow projects to go forward that would have not been economically viable previously. ■

*Brad Gilmer is President of Gilmer & Associates, and is also Executive Director of the AAF Association.*

 Send questions and comments to:  
[brad\\_gilmer@intertec.com](mailto:brad_gilmer@intertec.com)

Introducing The **COOLEST** Long Zoom,  
And The **HOTTEST** Wide-Angle:

**CANON BROADCAST  
WE GO TO EXTREMES!**

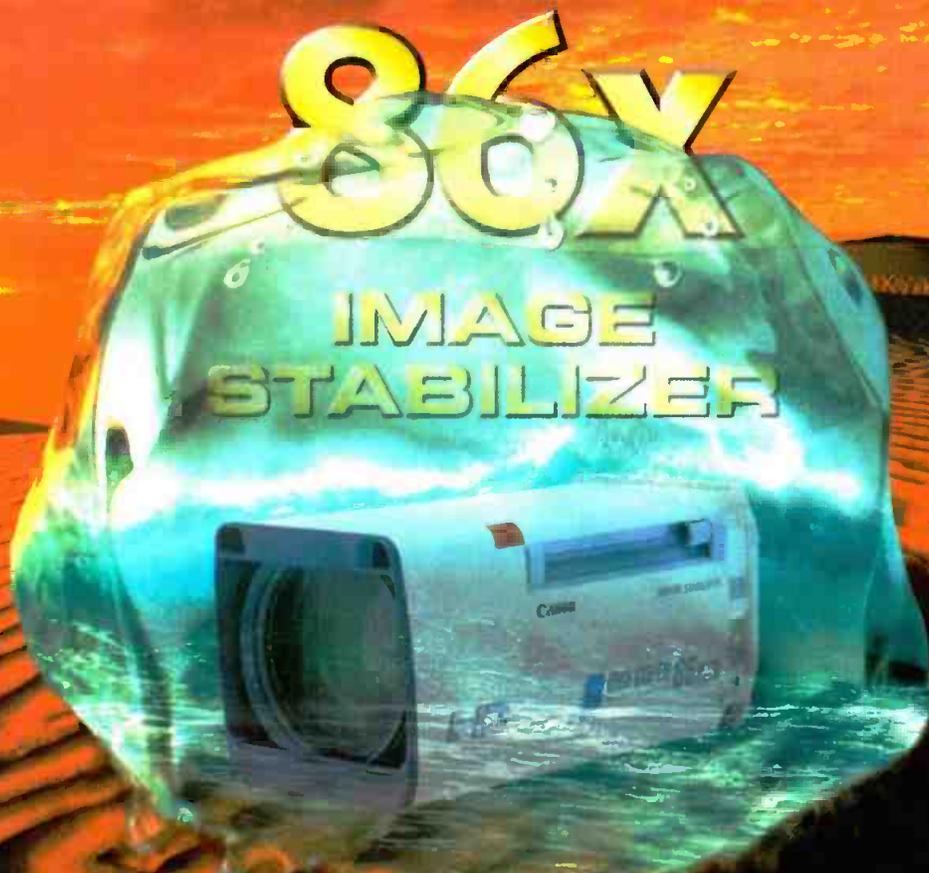

**PLUS THE WIDEST EVER 101.4° ENG/EFP LENS.**

**SEE THEM AT NAB BOOTH #L11848**

*Maximize Your Camera's Performance.*

**For more info: Call 1-800-321-HDTV**

(In Canada: 905-795-2012)

<http://www.usa.canonbroadcast.com>

**Canon** KNOW HOW™

Circle (128) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)



## AES-3 distribution: Coax or twisted pair?

BY STEVE EPSTEIN, TECHNICAL EDITOR

**A**s an equipment distributor, we have sold both balanced and unbalanced digital audio systems. My understanding of balanced and unbalanced audio is from the analog audio world, where the balanced audio has a cleaner signal due to the shielding in the balanced cable. Is the same true in digital audio? Or, I guess the question might be: Is there an advantage to deploying balanced digital audio? With unbalanced digital audio able to use standard coax with 75Ω connectors and inexpensive routers/distribution systems, why would anyone ever want to use a balanced AES digital audio system?



Dale Rochon  
Vice President, Sales & Marketing  
Image Technics Inc.  
Irving TX



**F**irst, let's look at the difference between a balanced signal and an unbalanced signal. A balanced signal consists of two signals, equal in amplitude, but opposite in polarity. These two signals can be floating or referenced to a common voltage. In nearly all cases, when the signals are referenced to a common voltage, that voltage is 0V or to ground. Obviously, floating signals are not referenced to a common voltage. The key advantage of balanced signals is their increased noise immunity over unbalanced signals. Understanding the reason for this requires an understanding of the relationship between electricity and magnetism.

Anytime current flows, a magnetic field is generated. This is true in audio cables, AC transmission lines and RF radiation. Magnetic fields, interest-

ingly enough, cause electrons to move within conductors — in other words, current flow. The amount of current flow depends on the strength of the magnetic field and how quickly it changes. Because cabling is made of metal — a conductor — it is affected by magnetic fields. As there are changing magnetic fields all around us, they cause current flow in cabling that typically shows up as noise.

Balanced signals are normally carried on twisted pair cable. At the receiver, the signal goes to a differential input. Differential inputs are configured to amplify any signals that are different on the two wires, and reject any signals that are the same. Signals entering the wire at the other end are different, because they are opposite in polarity. However, any noise that was picked up along the way will be almost identical on each of the two wires, therefore it will be rejected. Adding a shield to the wire reduces the amount of noise picked up.

Unbalanced signals typically use coaxial-type cables and rely on the shield to reduce the amount of noise picked up by the wire. In recent years, manufacturers have begun putting differential inputs on equipment that uses coaxial connectors. Insulating the shield from the chassis and connecting the center conductor and the shield to the two inputs does this. Although the noise reduction produced by this is less effective than when used with twisted pair, there is still some benefit gained.


With the differences between balanced and unbalanced signals covered, let's look at their use with digital audio. First, because this is digital, induced noise on the cables will not affect the audio. The noise, however, can affect whether or not the digital signal can be recovered at the other end. So, what do you use, coax or twisted pair? As usual, it depends. One consideration is length. Coaxial cables can go about 2000ft with digi-

tal audio, while twisted pair is only good to about

1000ft. However, only a small percentage of cable runs fall into that length, so that's not much help. Adapter costs are about \$45 each and this applies whether you need to go BNC to XLR or XLR to BNC—again not much help. Twisted pair cable is typically less expensive than coax, so there is something to consider, but how much time is required to put the connectors on? How much does that extra time cost? An interesting twist (no pun intended) on the cable/connector angle is the use of Category 5 cabling and RJ-45 connectors by Radio Systems in their StudioHub products. This is more of a distribution solution than something used for termination, but it may be worth looking into. On the BNC side, the tools to strip the cable and crimp the connectors can easily run \$300 to \$500, or about 10 adapters. My background is video, and with the right tools, I can put a BNC on much quicker than an XLR. However, if your background is in audio, the opposite is probably true. XLR and BNC connectors are comparable in price, but the XLRs can typically be reused, whereas crimp-type BNCs cannot.

I checked with some manufacturers of AES-3 equipment to see if there was a trend one way or another. For the most part, sales of XLR vs. BNC AES equipment is about 50/50, but if the manufacturers are leaning any way, it is toward BNCs. Personally, I can't find a compelling reason to use XLRs and twisted pair cable, but I am sure there are plenty of audio engineers that would disagree.


If you have a problem that I can help with or simply have a comment, you-know where to find me: [drdigital@compuserve.com](mailto:drdigital@compuserve.com). ■

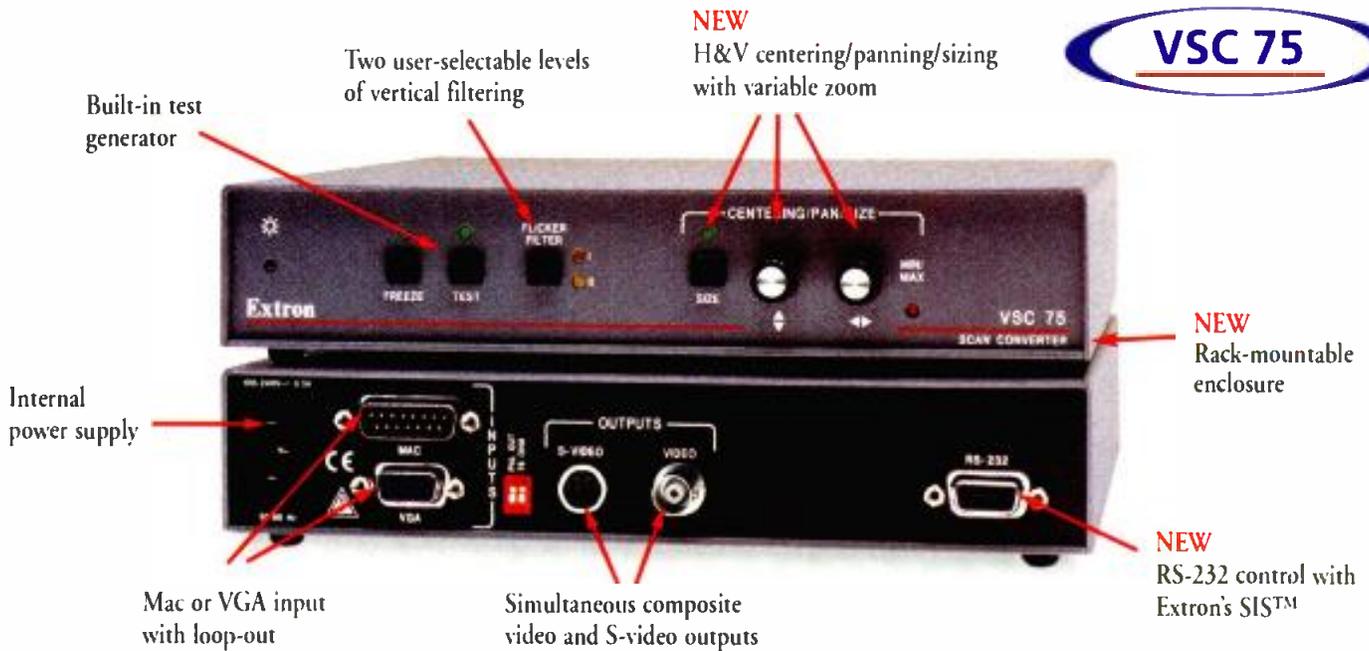**VSC 75**

# The Scan Converter Built To Fill The Price/Performance Gap

Extron's new VSC 75 high resolution computer-to-video scan converter includes the most popular features of our VSC 100 and is priced closer to our economical VSC 50. It perfectly fits applications like videoconferencing and computer video recording that do not require the RGB or component video output capability included in the VSC 100. The VSC 75 uses advanced digital processing to offer the following advantages:

- Converts computer images from 560 x 384 up to 1280 x 1024 @ 60 Hz down to NTSC or PAL video
- 15-pin D and HD connectors for easy connection to any Macintosh or IBM-compatible computer and local monitor
- Simultaneous composite video and S-video outputs
- Internal test pattern generator outputs color bar patterns for setting up color adjustments
- Horizontal & vertical sizing, centering/panning controls, variable zoom
- Two user-selectable levels of vertical filtering reduce flicker
- 30 factory/user presets for horizontal & vertical sizing, vertical filtering, and horizontal & vertical centering settings with autosave and auto-recall
- Rack-mountable, 1U high, 1/2 rack width, metal enclosure fits on optional 1U rack shelf
- Extron's Simple Instruction Set (SISTM) for RS-232 control via Extron's Windows®-based control program or third-party control
- 100-240VAC, 50/60 Hz, auto-switchable internal power supply

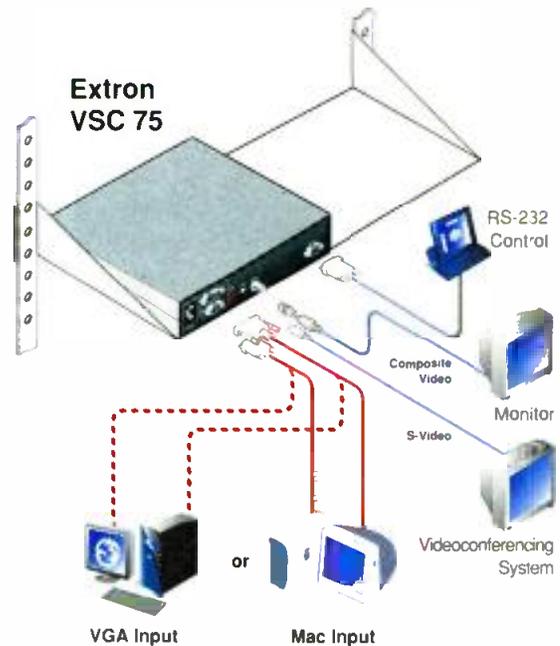

The VSC 75 part number is 60-320-01.  
1U rack shelf part number is 60-190-01.

For complete details, visit Extron's website at  
<http://www.extron.com/product/product.asp?id=vsc75>

## Extron Electronics

800.633.9876 • [www.extron.com](http://www.extron.com)



EXTRON ELECTRONICS/RGB SYSTEMS, INC.  
1230 South Lewis Street, Anaheim, CA 92805  
800.633.9876 • 714.491.1500 FAX 714.491.1517  
U.S.A.

EXTRON ELECTRONICS, EUROPE  
Beeldschermweg 60 • 3821 AH Amersfoort  
+31.33.453.4040 FAX +31.33.453.4050  
The Netherlands

EXTRON ELECTRONICS, ASIA  
41B Kreta Ayer Road, Singapore 089003  
+65.226.0015 FAX +65.226.0019  
Singapore

EXTRON ELECTRONICS INFORMATION  
EXTRONWEB™: [www.extron.com](http://www.extron.com)  
EXTRONMAX™: 714.491.0192  
24-hour access—worldwide!

# SYSTEMS DESIGN SHOWCASE

## News networks served new video playback solution

By Don Thompson

The networks of CNN News Group are on the air around the world 24 hours a day, seven days a week. Yet, the Atlanta headquarters is in an almost constant state of facility redesign. Some compare it to changing the wheels on a moving locomotive. Very few of us will have the opportunity to experience first hand the challenges of such a large and complex environment but we can, courtesy of CNN, take a snapshot of this constantly morphing broadcast giant and use the lessons they have learned in our own projects.





The CNN newsroom. Located at CNN world headquarters in Atlanta, GA, the facility encompasses more than 18,000 square feet of space, which can accommodate more than 200 news and technical staff. Photo by Ron Sherman.



Control room for CNN Headline News. The main technical operating position, shown on the right, uses a GVG 4000 production switcher

make the minor software and hardware modifications necessary to meet reliability goals.

As work progressed on proving the core equipment to be used, various other facility issues came to the forefront, such as where to locate the servers. Since the current arrangement allowed each network to have its own terminal gear area, the decision came down to which one had enough space to accommodate the new gear. CNN and Headline News had about 13,000 square feet of terminal gear space. This project would necessitate an expansion to about 18,000 square feet, but this would ultimately shrink back to less than the original 13,000 square feet. Space in the CNN terminal gear area was selected for the installation.

Another issue was cabling. CNN News Group networks are located in two multistory towers with a common atrium. Since the networks grew originally as separate entities, sufficient interconnect cabling to support shared server-based playback did not exist. Additional fiber cable was installed between the two buildings.

Meanwhile, testing and configuration

continued with the Leitch servers. The design called for 30 dual-channel Leitch VR300 servers arranged in two 15-server arrays with 62 hours of storage on each half. Each array has 18 output ports and 12 input ports with RAID

**CNN News Group is  
committed to making  
MPEG-2 the basis of their  
operation.**

protected Fibre Channel storage. Any clip sent to the server is actually duplicated on both arrays. Sophisticated data management software is constantly checking to ensure that a complete mirrored environment is maintained.

Another important element of this project was writing and testing the software, which would allow the servers to interface productively with the Avstar Newsroom system used by editorial staffers to write, edit and build their newscasts. CNN Headline News was already using Avstar, and plans

were underway for the other networks to implement its use as well. Leitch developed custom software for its VR300 servers to accommodate this requirement. And, always mindful of the need for a backup plan, the design team developed an RS-422 controller which is hardwired directly to the server and independent of any other data networks or computers. A control panel was built by DNF of California for each control room. The added hardware allows control room staff to continue to operate the servers in the event of failure of other systems.

As hardware testing and software development continued, the next decision that had to be made was selection of the first network to begin using the server. With its studio and control room renovation completed and the fact that its normal operation involved recorded rather than live playback to air, CNN Headline News was determined to be the best choice for first implementation.

In the fall of 1999, CNN Headline News began using server-based playback in a shadowing mode with their current setup. The new server worked

# HDTV

## Tools for the Transition!




Alliance  
Digital Master Control



Cougar HD  
32x32 Matrix



Ocelot HD  
16x16, 16x8 Matrix

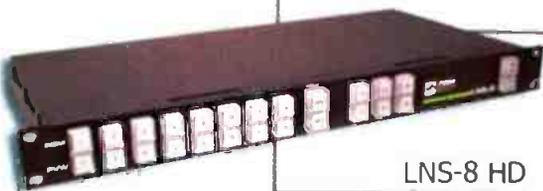

LNS-8 HD  
8x2 Matrix



Corporate Sales Office  
35 Pinelawn Road Suite 99E  
Melville, NY 11747  
Tel: 631-845-5020  
Tel: 800-328-1008  
Fax: 631-845-5023

**PESA** High  
Definition  
Solutions

HDTV won't replace all other formats anytime soon. That's why the PESA Alliance Master Control Switcher makes so much sense. The Alliance is designed for; 1) full-time SDTV; 2) full-time HDTV; or 3) mixed SDTV and HDTV broadcasting. Multi-format technology allows SDTV systems to be upgraded to HDTV, preserving your investment. The PESA Alliance also supports multi-channel capability, so you're ready to handle any programming strategy.

PESA's lineup of HDTV routers is right for today's needs. For maximum flexibility take a look at the Cougar HD. You can start as small as 4x4 and expand to 32x32 with plug-in cards. The Ocelot HD delivers a 16x8 or 16x16 matrix in only 1RU, making it great for field or studio use. The LNS-8 HD 8x2 switcher is perfect for monitoring, editing, telecine, and automated applications.

Ask about PESA's all-new HDTV distribution Amplifiers!

Copyright©2000. All rights reserved.

[www.pesa.com](http://www.pesa.com) / [salesinfo@pesa.com](mailto:salesinfo@pesa.com)



CNN Headline News media operations area. Note the edit bays in the background.

so well that the network dropped its shadowing after only a few days. This quick success was due to the long months of testing the system had undergone, as well as the involvement of employees at all levels in the design and implementation process.

With Headline News online, the CNN team could consider the next network to convert. CNN International seemed the best candidate. CNNI operates two simultaneous control rooms and often needs access to the same stories at the same time. Throughout the fall of 1999, CNNI's operations staff worked on the conversion details involving not only accessing the server, but also implementing use of the Avstar Newsroom system and rearranging equipment in their control rooms. CNNI spent a significant amount of time getting input from employees on how the new design should be implemented in their operating environment. This hard work paid off in early 2000, when CNNI's conversion to server-based playback was complete.

It is important to remember that for the CNN News Group, implementa-

tion of server-based playback was not occurring in isolation. During the time that this project was in process, the CNN newsroom was completely rebuilt and Headline News facilities, including control room, were relocated and rebuilt from top to bottom. In addition, a centralized routing system for video and audio was being installed along with a New Media Operations Area with 40 edit rooms that went on line during the summer of 1999.

Timing and coordination of the various projects became an issue, as well as the application of resources to the projects. The same R&D and engineering resources had to be applied to all of these projects. One lesson learned from the server-based playback project was that for any project that touches so much of an organization, the time to complete is probably longer than first estimated.

With two networks now using the server, the project continues during 2000 to bring the other networks on line. Because of the effective close working relationship with the vendors on the project, any expansion needed in the future can be readily accomplished.

Overall, the lessons offered by the

CNN News Groups approach to facility design are:

- Work from a business-focused plan;
- Select flexible vendors who will buy into the design concept;
- Involve all levels of employees; test new systems exhaustively; and most importantly,
- Implement projects in a steady measured way, so that customers continue to receive the high-quality product to which they are accustomed. ■

*Don Thompson is director of marketing for Leitch.*

## Design team

Gordon Castle, VP of research and development, production  
 Keith Chandler Project manager  
 Bob Hesskamp, VP of operation, international  
 Kevin Ivey VP of research and development, basic technologies  
 Jack Ormond VP engineering, CNN News Group  
 Tom Kingsley, director of engineering, CNN  
 Scott Tiessler, CTO

# DIGITAL TERRESTRIAL TELEVISION

## COFDM Professional Measuring Receiver

### DTVM 2000(T)

- Measurements in accordance with ETR 290
- Real time measurements
- Logging facility
- 2K or 8K compatible
- 6, 7 and 8 MHz versions in UHF and VHF formats
- User programmable alarm outputs
- Full remote control



## MPEG Professional Monitoring Decoder

### DTVD 200

- Measurements in accordance with ETR 290
- Comprehensive error logging
- Full "on-screen" display
- Analogue/SDI PAL/NTSC audio/video outputs
- Full front panel, IR or remote control
- Ideal partner to DTVM 2000 for full suite of RF and DataStream measurements conforming to ETR 290



Please visit  
us on  
BOOTH S3010  
at NAB 2000

**B**  
**BROADCAST  
TECHNOLOGY**

Full details from:  
Broadcast Technology  
Royce Close,  
Sopwith Park,  
West Portway,  
Andover, Hants, UK  
SP10 3TS

Tel: +44 (0)1264 332633  
Fax: +44 (0)1264 334509  
Email: [btech@btinternet.com](mailto:btech@btinternet.com)  
Website: <http://www.btl.uk.com>

Circle (132) on Free Info Card


# SYSTEMS DESIGN SHOWCASE

## KVBC-TV

By John Holland

Just a mile north of downtown Las Vegas is NBC affiliate KVBC-TV Channel 3, a 53rd market television station in the final stages of completing its transition to digital. What better audience for this kind of technological advance: Las Vegas' enthusiasm for techno-toys is almost as great as the wattage lighting up the city. Reportedly, VCRs penetrated the market there faster than anywhere in the country, and today one in three people packs a cell phone.

The production control room is built around Grass Valley 4000-3 with four channels of Krystal DVE. An Omnibus automation system provides control over the Profiles, assembling news clips from the EditStar and NewStar systems. Photos courtesy of Grass Valley Group.

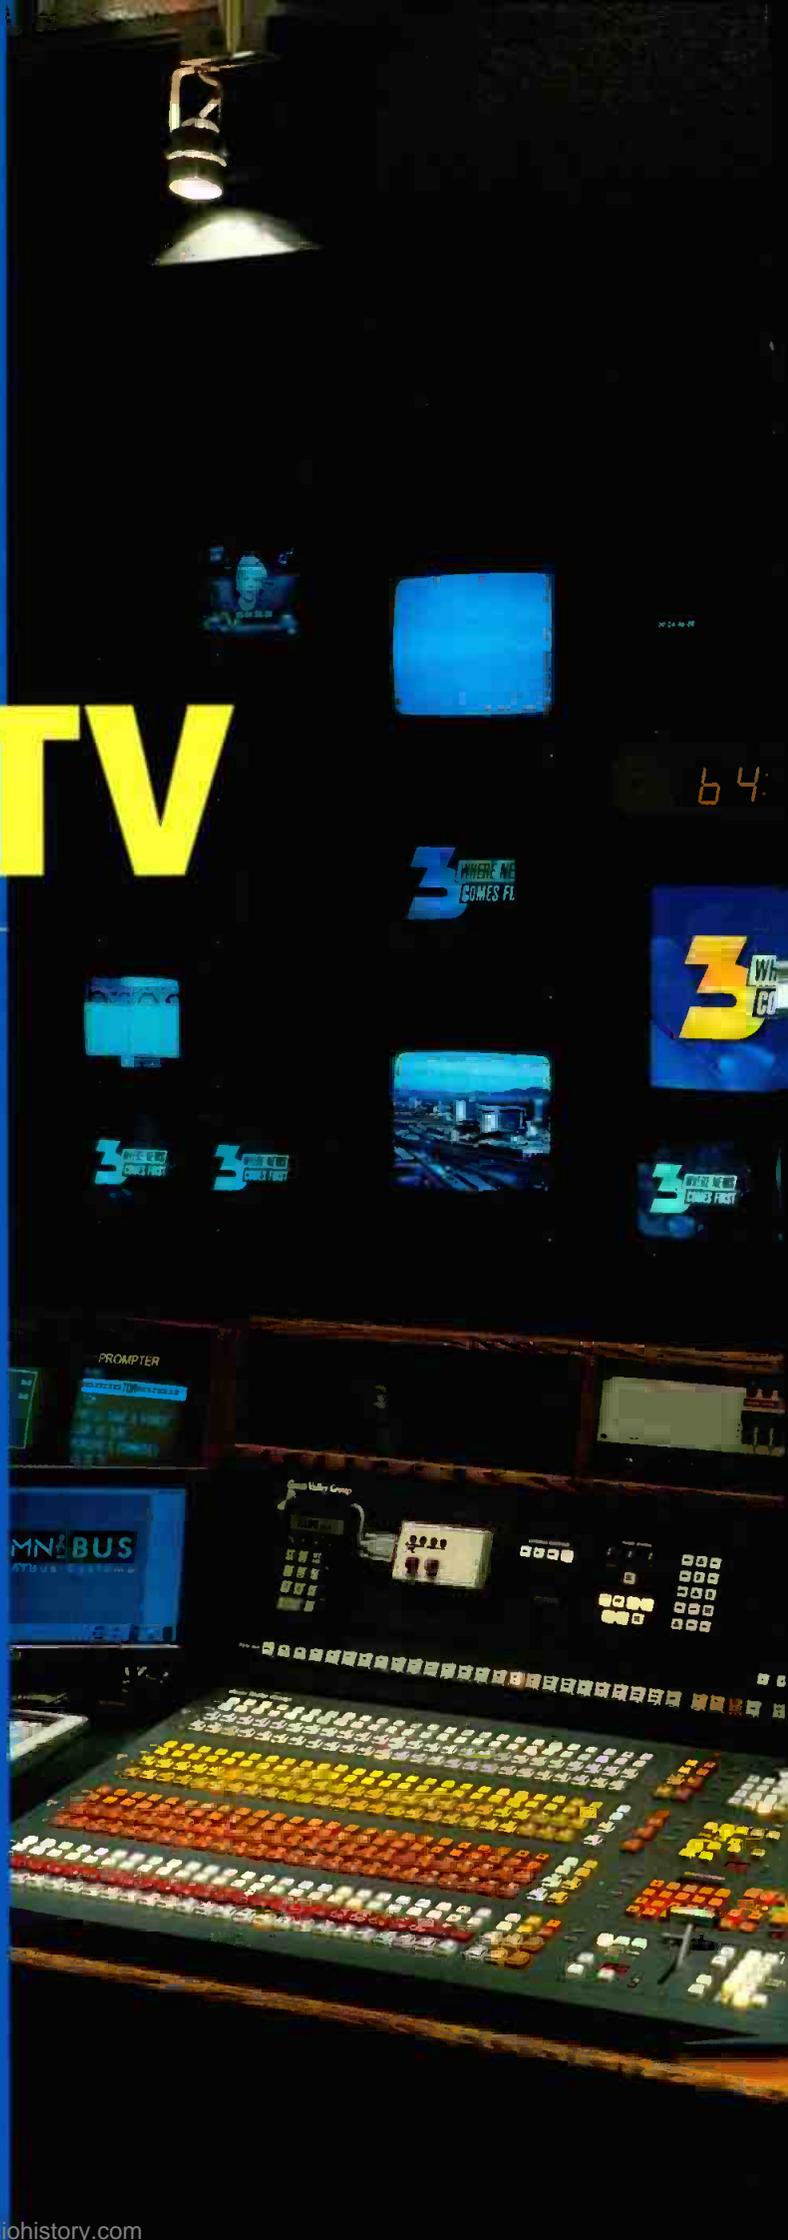



NEWS 3  
WEATHER

09:40 98

NEWS 3  
WEATHER

NEWS  
WEATHER

NEWS  
WEATHER

sValley

NEWS 3  
WEATHER

64 98

# KVBC-TV

KVBC-TV, whose slogan is "Where News Comes First," provides news coverage for all of Southern Nevada utilizing satellite trucks, live microwave units, news vans and Sky 3, the station's on-site helicopter. Through its affiliation with NBC, it provides prime-time programming, including news and sports programming.

Nearly two years ago, the KVBC engineering team went shopping at NAB to find a new solution for news editing and overall news product handling at the station. It also sought a digital infrastructure that would enable the station to keep pace with the twists and turns of digital television and related new media. Maintaining a technological edge was key to maintaining leadership in an ever-expanding market.

Today, KVBC-TV has been transformed from a purely analog operation to a fully digital 601 facility. It features a format-independent digital infrastructure for editing, production and transmission provided by the Grass Valley Group and Avstar, a jointly owned subsidiary of the Grass Valley Group and Avid. Omnibus Systems provided the control layer for the new KVBC facility, and Beck Associates served as the system integrator.

## Digital infrastructure lays groundwork for digital transition

In preparing for a server-based operation, the KVBC engineering team members were initially proponents of a "one-box" theory—a single device that could serve

as a central ingest, processing and playout point. A multidevice approach seemed prohibitive, given a lack of fast and reliable media asset management tools that could quickly locate materials across multiple systems. On the other hand, the team reasoned that a single massive box also could become a single massive point of failure. After visiting NAB98 and the Grass Valley Group (then Tektronix), what began as an effort to change how editing and news product handling was supported blossomed into strategic rebuild of the facility. KVBC engineers instead determined a digital media infrastructure based upon a distributed network of storage devices, linked via audio/video routers, data networks and a central automation structure would be the better solution.


As NAB 2000 approaches, KVBC-TV is getting ready to throw the switch on an integrated system for news ingest, news editing, finish editing, live production, news playout, master control and facilities management, all linked by digital routing technologies, including a Fibre Channel network for faster-than-real-time transfers. The new infrastructure will bring

KVBC's facility to the state-of-the-art while preparing for the station's move to digital transmission, which is scheduled to occur over the next year.

The Grass Valley Group, in partnership with system integrator Beck Associates, worked with the KVBC engineering team to reconstruct the infrastructure of the studio. Engineering management is confident that KVBC-TV now has a facility that will upconvert digital transmissions very nicely and a switching and automation structure that will enable key applications, such as HD broadcasting, as programming becomes available and the market warrants.


## News and commercial automation system

Just prior to NAB two years ago, KVBC-TV made the decision to go DVCPRO as the standard for news-gathering. The Grass Valley Group Profile PDR400 digital video platform fell right in line with this strategy and KVBC used the PDRs to lay the foundation for keeping the entire KVBC news operation in a DVCPRO format. Now KVBC is able to shoot in the economical digital format, and

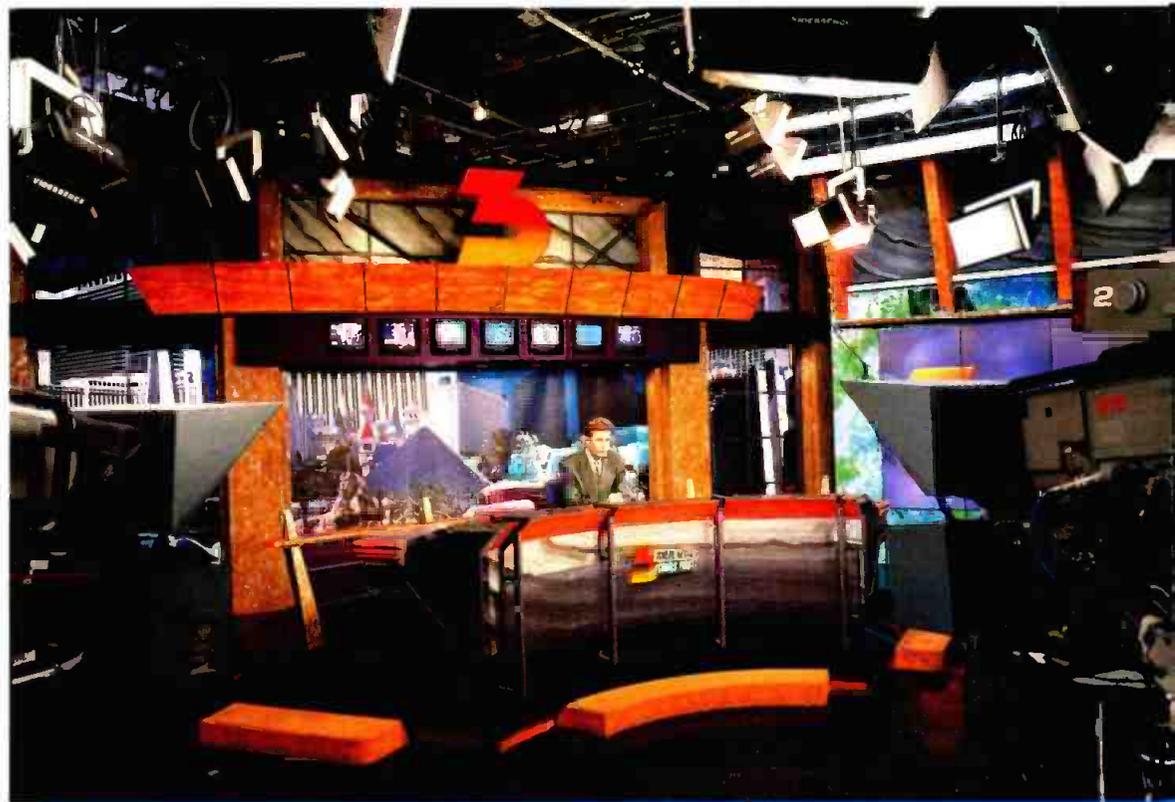

News coverage is the station's key branding feature. Supporting the on-air news staff is a fully-equipped studio with low-power consumption Videssence lighting and Philips cameras.

# TAKE THE NEXT STEP IN SOUND

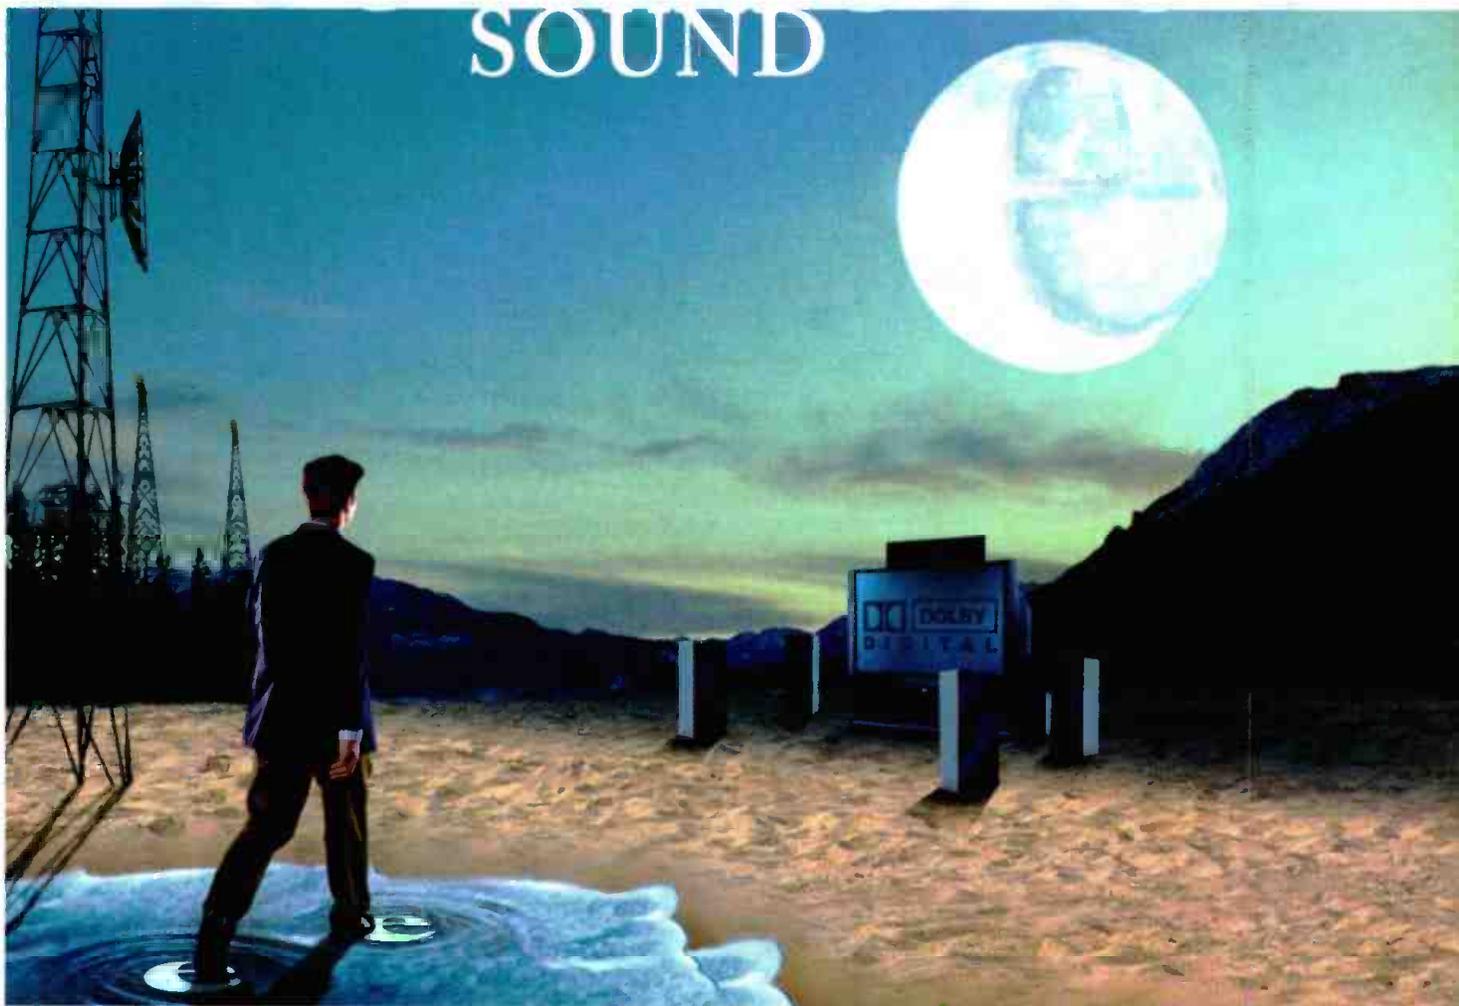

Viewers love surround sound. Now, with Dolby E you can take the next step to multichannel surround sound for DTV. Because with Dolby E it's easy. You can use your existing digital equipment to distribute up to eight channels of high-quality audio, plus Dolby Digital metadata, for the best sound imaginable. And with the Dolby E decoder's voice-over and switching capabilities, even local stations can easily broadcast 5.1-channel audio. The Dolby E DP571 Encoder and DP572 Decoder are available now from Dolby professional audio dealers. Contact us to find out how easy it is to take the next step.

[www.dolby.com/tvaudio](http://www.dolby.com/tvaudio)

**DD Dolby**

BREAKING SOUND BARRIERS  
FOR 35 YEARS

Dolby Laboratories Inc • 100 Potrero Avenue, San Francisco, CA 94103-4813 • Telephone 415-558-0200 • Fax 415-863-1373  
Wootton Bassett • Wiltshire • SN4 8QJ England • Telephone (44) 1793-842100 • Fax (44) 1793-842101 • [www.dolby.com](http://www.dolby.com)

Dolby and the double-D symbol are trademarks of Dolby Laboratories © 2000 Dolby Laboratories Inc S00/12933

# KVBC-TV

transfer material straight to the PDR400 for editing and playback without changing compression schemes.

In addition to material arriving from the field on tape, KVBC's news operation has several microwave and satellite feeds. Regardless of the delivery method, as the first few frames of material are downloaded into one of two ingest Profile units they are simultaneously available for on-air, editing and treatment as topical promotions. The two Profile machines operate under OmniBus control for manipulating the media. The PDR400s, which offer approximately 22 hours of storage each, enable the station to transfer material to its editing Profile systems via a Fibre Channel network, letting incoming feeds flow directly into the newsroom and to EditStar workstations for editing.

For news editing, the station uses nine EditStar workstations, connected to three Profile digital video platforms.

The EditStar system from Avstar provides drag-and-drop control for first cuts-only editing of stories nearly up until airtime. Up to nine journalists in the newsroom can load material directly from videotape into an EditStar-equipped Profile device for editing; digitization takes place with each edit, eliminating the time to predigitize the videotape. As individual clips are finished, the Omnibus system compares the pieces with rundown information

obtained from the NewStar system and transfers them to a cache Profile for automated playout during the newscast. For finish editing and special projects, the station is using three Avid Media Composer 1000 systems: one for news and two for production.

Long term, the station is hoping its investments will yield dramatic improvements in its archive and retrieval capabilities. In the short term, it expects its new systems to give journalists the ability to share media much



**A facility-wide Omnibus automation and control system provides on-air media management, as well as supporting the dubbing and playout of spots and interstitial. A Grass Valley M2100 can handle both SD and HD playout channels under Omnibus control.**

faster and effectively — finding the right clips and getting stories to air quickly.

For live production, KVBC is using a Grass Valley 4000-3 production switcher with four channels of Krystal digital video effects. The system also features a Profile PDR200 digital video platform operating under DNF and Grass Valley P-Bus control for higher resolution graphic elements.

Meanwhile, KVBC's new infrastruc-

ture is streamlining its commercial capabilities. Interstitial material is transferred either from videotape or from satellite-based servers to two mirrored Profile PDR300 MPEG-2 digital video platforms with 21 hours of storage each. These units are networked via Fibre Channel but operate separately from the other Profile devices. Material stored on these Profile systems consists of commercials (mostly 30-second spots), station identification spots (mostly 10 seconds), promos (mostly 30-second promotions), and Public Service Announcements (mostly 30 seconds). Approximately 30 interstitials are added every business day, and 150 are deleted at the end of every week. OmniBus Columbus software provides the automated media management, dubbing and playout of these materials.

The master control switcher at KVBC-TV is a Grass Valley M-2100. The switcher can be operated manually from the control panel or put under the control of the Omnibus software. The M-2100 is capable of multichannel operation, allowing for expansion into multicast and HDTV. The station is also using a Fibre Channel network to provide faster-than-real-time transfers of audio and video information among the Profile digital video platforms. This configuration will let it transfer and archive material at four times real-time speed without passing it


through a codec. While the MPEG-2-based PDR300s handle the commercial material, long-form materials are principally recorded and played back on Panasonic AJ-D950 DVCPRO-50 tape machines, also under Omnibus control.

Linking the KVBC editing, production and on-air replay systems are Grass Valley SMS7000 digital video and audio routing systems. These systems are framed 128x128 and loaded

# TEAM

# FUJINON

# Up for the Challenge.

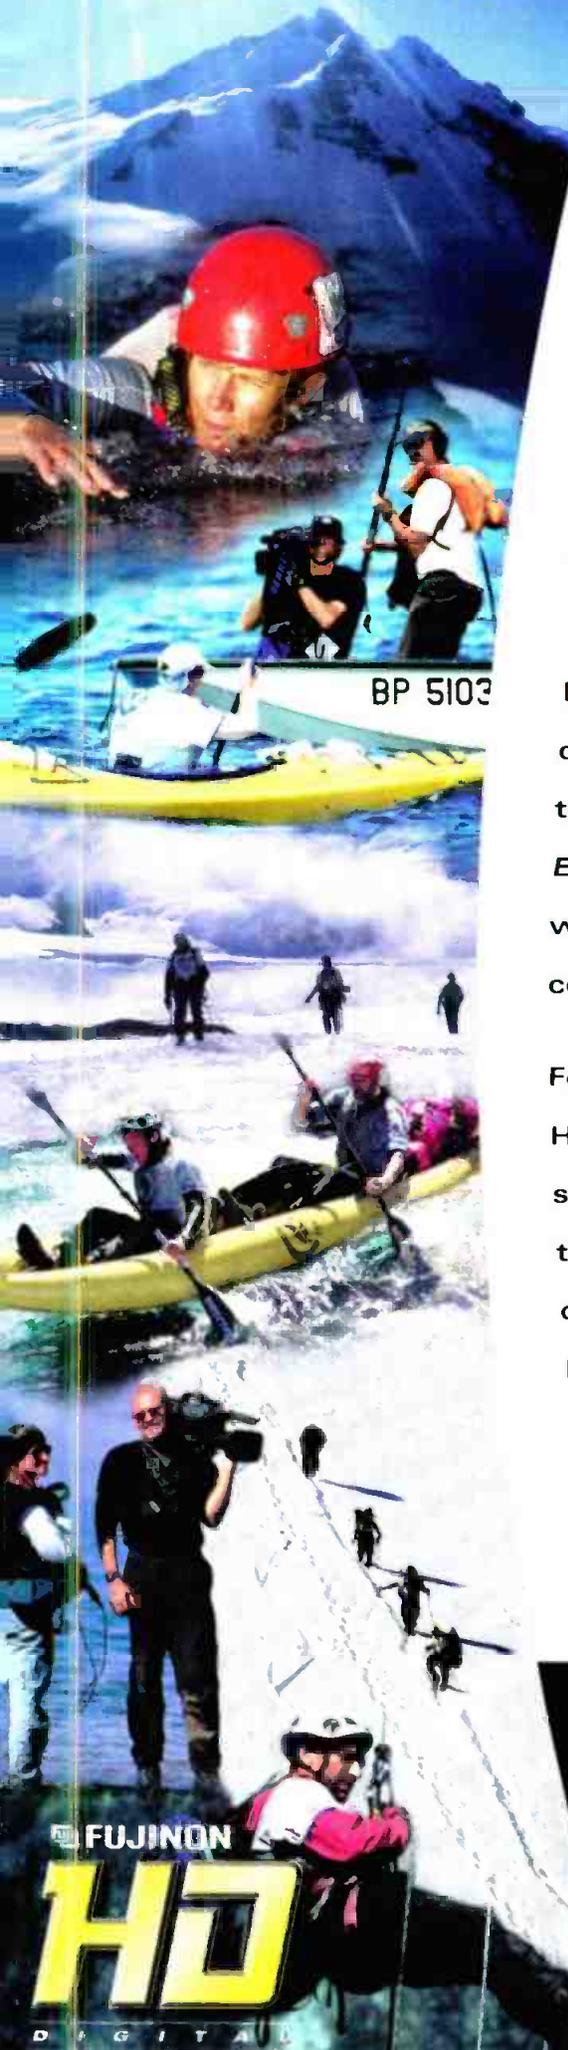

BP 5103

Each year, the most skillful and experienced athletes are chosen to compete in the gritty...the unpredictable...the world's toughest multi-sport endurance race, *The Discovery Channel Eco-Challenge*. Fujinon, the world leader in Digital HD lenses, was chosen for what is described as "the largest and most complex HDTV remote shoot ever attempted."

For 12 non-stop days and nights and 300 grueling miles, our HA20x7.5 and HA10x5.2 lenses (20 in all) clearly captured every scene of action-adventure. From the windswept glaciers of the majestic Andes Mountains to the dense bamboo forests of Argentina, Fujinon's Digital HD lenses we're truly up for the challenge.

What's *your* challenge?  
Fujinon is ready.



## FUJINON HDTV

**Broadcast & Communications Products Division**

FUJINON INC. 10 High Point Dr., Wayne NJ 07470-7434

Phone: (973) 633-5600, FAX: (973) 633-5216

FUJI PHOTO OPTICAL CO., LTD. 1-324 Uetake, Omiya City,  
Saitama 330 Japan, Phone: 048-668-2152

**1-800-553-6611**

**DI POWER**

Circle 134 on Free Info Card  
[www.americanradiorhistory.com](http://www.americanradiorhistory.com)

FUJINON  
**HD**  
DIGITAL



Profile video server room. A combination of Profile PDR400s, with native DVCPRO format recording and the PDR200s for on-air clips make a powerful team for the stations' fast-pace news operation. Two ingest PDR400s provide 22 hours' storage each. Material to be edited is transferred to PDR200s over Fiber Channel.

128x96 with one stream (two channels) of AES digital audio. Existing analog sources are converted through A/D-D/A converters.

At the heart of the KVBC system is the OmniBus Facility Management System for resource management, media management and machine control. Eighteen OmniBus user interface computers are located within the KVBC facility to provide quick and easy access to media and control over network devices. The station also uses the OmniBus system as an interface to its JDS/Bias traffic and Avstar/NewStar newsroom automation systems.

### Looking forward

KVBC-TV is relying upon the strength and flexibility of its new digital infrastructure to help it keep pace with the growth of the surrounding Las Vegas metropolitan and greater southern Nevada areas. With the population of Las Vegas alone growing by 6,000 people per month, the expectations of southern Nevada viewers are much higher today than they were 10 years ago.

KVBC-TV, which has successfully made the transition from analog to digital and from a small- to medium-sized market, now is well-positioned

to make the move from medium- to large-sized market and into new capabilities, such as HDTV, Internet streaming and central casting, as the market and industry demand.

*John Holland is director of engineering at KVBC-TV, Las Vegas.*

## KVBC Equipment List:

### Live Production:

- GVG 4000-3 Digital Production Switcher
- GVG Krystal Digital Video Effects (Four Channels with Combiner)
- AMS/Neve 32 Channel Series 55 Audio Console
- Philips/BTS LDK 90 Studio Cameras (3)
- RTS Matrix Intercom

### Electronic Graphics:

- Chyron iFiNiT! Character Generator
- Quantel Picturebox Twin Still Store
- Quantel Paintbox
- Quantel HAL

### Master Control:

- GVG M-2100 Multichannel Master Control system equipped with one SDI frame Central Video/Audio Storage:
- GVG Profile PDR 400 Digital Media Platforms (6)

GVG Profile PDR 200 Digital Media Platform (1)

GVG Profile PDR 300 Digital Media Platforms (2)

### Videotape:

- Panasonic DVCPRO50 VTRs (10)
- Panasonic DVCPRO VTRs (22)
- Sony Betacam VTRs (10)
- Sony 1" Type C VTRs (2)

### Distribution:

- GVG SMS 7000 Digital routing system
- Leitch VIA 32 Analog augmenting router

Digital /Analog Distribution by GVG in universal 8900 frames

Seamount Patch panels with Trompeter patches

Leitch DFS 3005 Converter/Synchronizers (36)

### Monitoring/Measurement/Signal Generators:

Master Control: Sony BVM14G5U/ Videotek VTM300

Engineering: Sony BVM14E5U

Production Control: Sony BVM20G1U

Tektronix WFM 601 A/E/M 's and various monitors

Tektronix TG 2000

Tektronix SPG422 (2)

### News:

Avstar NewStar for Windows Computer system

Avstar EditStar news editing system (9 stations)

Avid Media Composer 1000

Panasonic AJ-D810 DVCPRO Camcorders (15)

Panasonic AJ-DLT75 DVCPRO Laptop Editors (5)

Microwave Vans (BAF and Frontline) (4)

SNG Truck (BAF)

Hughes 500 Helicopter equipped with Wescam/Troll Microwave system

and FLIR Systems Ultramedia II gyro-stabilized camera

Adaptive Broadband RF equipment and Troll/Wescam control systems

Trollcam remote controlled camera systems (3)

### Creative Services/ Online Editing:

Panasonic AJ-D900 DVCPRO50 Camcorders (2)

Avid Media Composer 1000 Editors (2)

Linear Tape Suite with GVG-110 Switcher and Sony BVE-900 Editor


### Traffic:

JDS/Bias

### Facility Management/ Automation:

OmniBus Systems featuring Columbus Automated Master Control and News Layout, Machine and Router Control

# INSPIRATION.

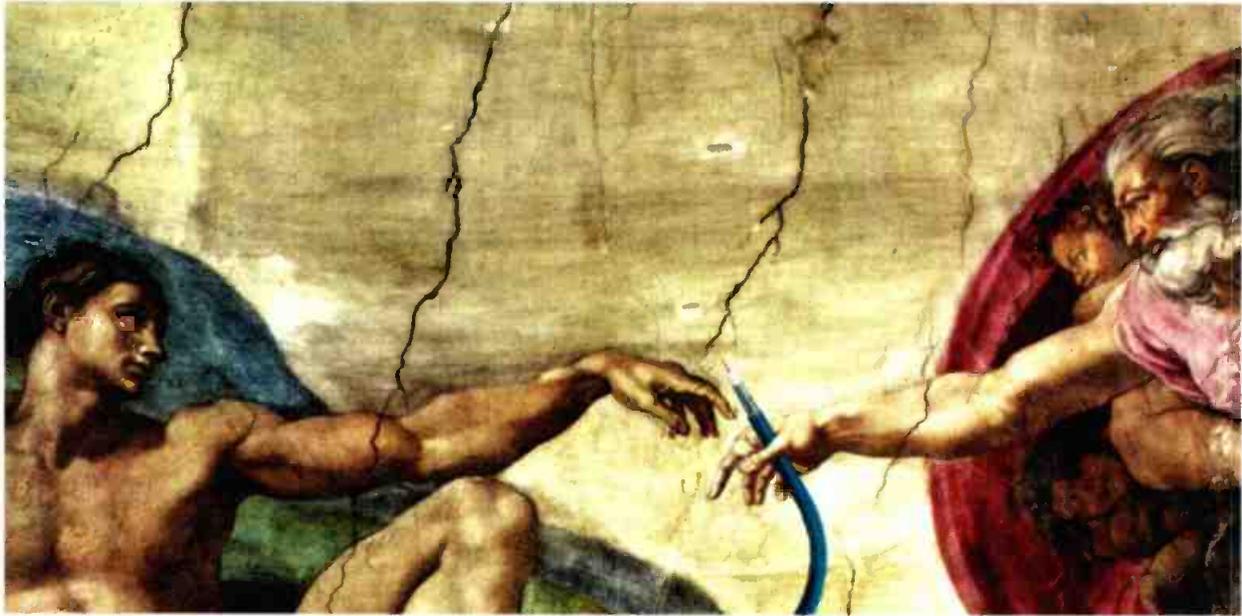

DIGITAL CABLES DESIGNED FOR  
DIVINE PERFORMANCE.

*Quantum*<sup>™</sup>

[WWW.COMMSCOPE.COM](http://WWW.COMMSCOPE.COM)

Visit CommScope Booth M9476 and our distributors at NAB

Liberty Wire & Cable  
Booth M8477

Yale Electronics  
Booth L8678

Bi-Tronics  
Booth L12412

Can Com  
Booth L12955

P.O. Box 1729  
Hickory, NC 28603-1729  
1.800.982.1708 • 828.328.2200  
Fax 828.328.3400

 **CommScope**  
How Intelligence Travels.<sup>®</sup>

©2000 CommScope, Inc. of North Carolina



One of the nearly completed RIBs undergoing some last minute touch-up before final inspection and preparation for shipment. Photos courtesy Concept: Benson & Rice.

# Sony's Olympic RIBs: Racks in a box

By Steve Epstein,  
technical editor

If you needed to put together a broadcast facility halfway around the world, and keep your costs down, how would you do it? Well if you were NBC, and wanted to reuse the facility for the next ten years, enlisting the help of a manufacturer/systems integrator such as Sony could be beneficial. With that in mind, Sony and NBC entered into a close collaboration on a project to build the broadcast facility for the Sydney Olympics. The design is such that the basic building blocks will also be used for the four Olympics that follow. All five Olympic broadcasts will be done by NBC. In light of the accelerating rate of change in today's technology, building anything that can remain state of the art for a period of ten years is a considerable challenge in itself. Making it deployable cost-effectively adds another dimension to the challenge.



**Our experience**  
spans more than 65 years,  
and our engineering still  
**makes it simple.**

## Plug it in!

Ask anyone and they'll tell you the same thing. The **K2 Digital IOT** sets the standard by which other IOTs are made. Why? It's simple. Years of experience have produced the best IOT. Our unique, field-proven design features simple, user-friendly tuning right on the front of the subsystem. Engineered for long life and broadcasting's highest efficiency, you don't even have to disconnect the power or cooling water to replace it. Sure we're an Emmy winner for technical achievement. But we've kept our focus on engineering the simplest and most reliable tools in the industry—so you can focus on the more important things in life. Plug it in!



A Division of  
Communications  
& Power Industries

.....  
301 Industrial Road  
San Carlos, CA 94070

.....  
tel 650.592.1221

fax 650.592.9988

.....  
email [iot@eimac.cpii.com](mailto:iot@eimac.cpii.com)

[www.eimac.com](http://www.eimac.com)



ISO 9001 Certified • Made in USA

Circle (136) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# Sony's Olympic RIBs: Racks in a box

## Building block basics

After buying the rights to the next five Olympic broadcasts, NBC need-



Ongoing integration work on several RIBs at Sony's integration facility in San Jose.

ed to find a way to do them with a very close eye on the bottom line. Through a series of win-win agreements (as well as a 10-year contract) with Sony Corporation whereby Sony would sell NBC some of the necessary equipment, lease the rest and provide system integration, the beginnings of an overall solution came together. The trick, it seemed, was to pre-build the system, ship it to the venue and do minimal assembly and integration on-site. For obvious reasons, it made the most sense to use standard shipping containers. Determining the best way to fill the containers was another

---

**The trick, it seemed, was to pre-build the system.**

---

matter. Talks were initiated with major shippers such as UPS and the U.S. military. If you think about it, the military's requirements are comparable — ship and deploy high-tech equipment reliably around the

world in an efficient manner.

Several different building blocks are used to construct this repositionable facility. One building block is a set of standardized equipment consoles built by TBC Consoles. These modular units are constructed from Formica-covered pressboard and can be quickly stacked into operator consoles of various lengths. For shipping, they slide into a set of stackable crates that are designed to collapse into compact units with minimal storage requirements. The next building block consists of a series of consoles and racks used to form a complete editing

Considerable engineering and testing went into the RIB design. Early on, a test rig was constructed that included the platform, shock-mounted racks and 6000lbs of elevator weights (300lbs in each rack). G-force sensors were placed throughout the system, and it was loaded into a container. The container was then dropped from a height of one foot. After the drop, readings were taken, an adjustment or two was made, and the containerized unit was then shipped over land by truck and train and then ocean-shipped to Hawaii. More readings were taken and the system was evaluated based on



One of the sealed and shrink wrapped RIBs being loaded into a shipping container at Sony's San Jose facility.

suite. The consoles are custom built and essentially self-contained. Although the current configuration contains mostly linear editing systems (19 out of 24), the design is such that it can easily handle nonlinear systems. The final, and most challenging building blocks are the RIBs. The RIBs consist of twenty equipment racks shock-mounted on a steel platform. This wheeled platform is built up from I-beams and includes forklift slots in both ends and the middle.

real-world loading data. As it turns out, there were some significant G-forces encountered in the rail and truck shipments; however, neither exceeded the forces imposed by that one foot drop in the parking lot.

## RIB construction

As stated, considerable design went into the RIB assemblies. The fully-welded platforms include six heavy-duty casters as well as four inverted screw jacks (one in each corner) that

# e-Studio

Because  
it's a  
hungry  
world  
out  
there.



## Feed both audiences at the same time. Create Live TV and Web broadcasts with e-Studio systems.

Satisfy your audience's appetite for content on the air and on the Internet with e-Studio. Expand audience size to the world. Add revenue from Internet banner ads and more. e-Studio is a turnkey solution for all your Internet broadcast needs: news, entertainment, e-commerce, web meetings and distance learning. Every e-Studio system begins with the award-winning ECHOlabs 5000 digital SuperSwitcher. It's a live show creation station which integrates: digital and analog I/O, DVE, clip and still stores, CG and networking. All switcher, web and device controls are operated from a line of intuitive control panels, allowing

you to create any show on the fly. e-Studio adds an integrated custom web server and RealVideo, automatically creating your web presence. Ony e-Studio combines broadcast style video with graphics, interactive surveys, ads, links, text, chat and more.

ECHOlabs, producer of innovative video switchers for nearly 30 years, has expanded its focus. In recognition, we've changed our parent company name to e-StudioLIVE. You can start with any ECHOlabs SuperSwitcher, or an e-Studio system to feed both audiences at once.

[www.e-studiolive.com](http://www.e-studiolive.com) 978.244.0858



# e-Studio<sup>TM</sup> LIVE!

© 2000 e-StudioLIVE, Inc. e-Studio, SuperSwitcher and ECHOlabs are trademarks of e-StudioLIVE, Inc. Other product names are the property of their owners.

See us at NAB, Booth #L9780 & I5819


Circle (137) on Free Info Card

## ECHOlabs SuperSwitchers


[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Sony's Olympic RIBs: Racks in a box

can be used to hold the RIB in place once it reaches its final destination. There are two D-rings on each side of the platform in case they are needed, however, no use is currently planned. The top of the platform is a single piece of plate steel that forms the basis for mounting the rack assemblies and provides an impenetrable barrier when the racks are sealed for shipment. The final key point in the platform is found in the corners. The shipping container is basically a box with square posts in the corners. On the front of each platform are a pair of triangular wedges that engage the square container posts and center the platform within

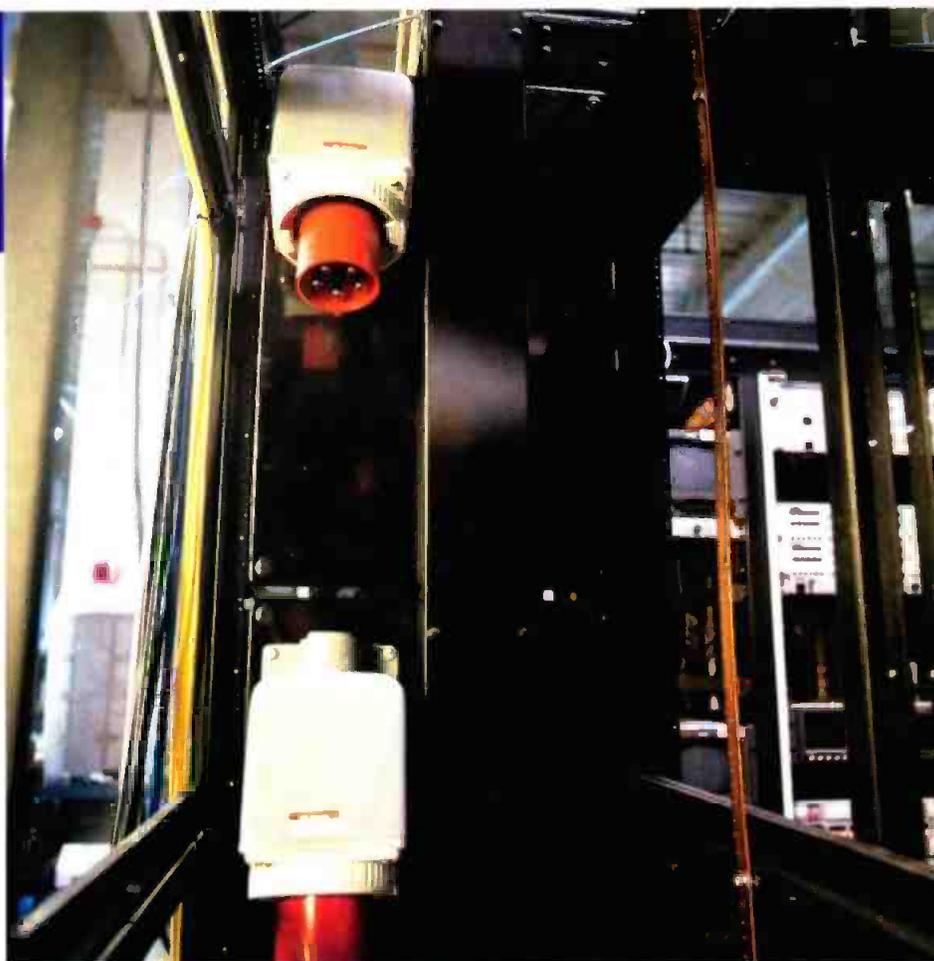

Power comes into each RIB through redundant distribution panels. Shown are the IEC connectors used for each panel.

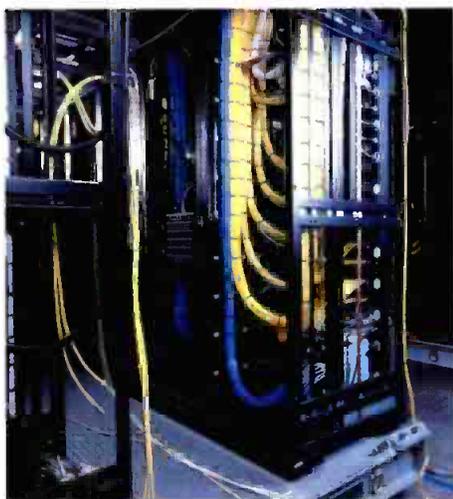

Some of the wiring that goes into a completed RIB assembly can be seen. In the lower right is one of the wedges used to pin the back of the RIB in the shipping container. Also note that the racks sit slightly off the steel floor, held up by the cable shock-mounts.

the container. Similar wedges are mounted on the back of the platform. These back wedges can be driven outward with  $\frac{1}{2}$ " machine screws, and then locked in place to mechanically pin the platform within the shipping container.

Each set of 10 racks is bolted together and then attached to the platform

with shock absorbing mounts. These mounts consist of 4 pieces of steel cable set in small metal blocks that allow movement in all three directions. Placed approximately every 24 inches, they allow the racks to move, but only slightly—unless under load. A pair of floor-mounted snubbers limit movement fore and aft (See photo). To reduce, but not restrict movement, the two sets of racks are attached at the tops with hinged connections. On the outside, a rubber bumper along the upper length of the racks provides some shock relief if the rack tops come in contact with the container. Above the racks, cable trays are used to contain the wiring within the RIB as well as harness assemblies used to interconnect the RIBs.

Moving from the mechanical to the electrical basics, each RIB is equipped with redundant power systems. These systems are fed with 250V, five-pin IEC 309 style connectors. These 125A, three-phase connectors are common

in Europe. Dual distribution boxes feed power to standard IEC connectors that are color coded. Use of the IEC connectors prevents someone from accidentally plugging a drill or heater into technical power. For the most part the power supplies used in the equipment can handle anything from 100- to 250VAC at either 50- or 60Hz. Copper strips are mounted in each rack for grounding. Further grounding steps can be taken on-site as necessary.

For signal cabling, lighter duty cables such as Belden 1855 were used within individual RIBs, while heavy-duty cabling such as Belden 1694 was used for all cabling used to interconnect the RIBs. All the cabling, interconnection panels and patch panels are HDTV ready, although the current equipment list contains mostly standard-definition equipment. To reduce deployment time, all cabling entering a RIB goes to an interconnection panel; that way, time isn't wasted

# THE ONE

Visit our website  
and register to win a  
DVD player at NAB!

## Format Converter That Does It All

### The Best Picture Always

- PIXELCOMP™ Motion Compensated De-interlacing
- Gamma Correct Colorspace Conversion
- Advanced 3:2 Pull-down Detection
- 32 Point Interpolation



# www.teranex.com


Call for more information: (407) 517-1086 ■ 7800 Southland Blvd., Suite 250 ■ Orlando, FL 32809

Circle (138) on Free Info Card

### Visit us at NAB 2000, Booth # L3723

www.americanradiohistory.com



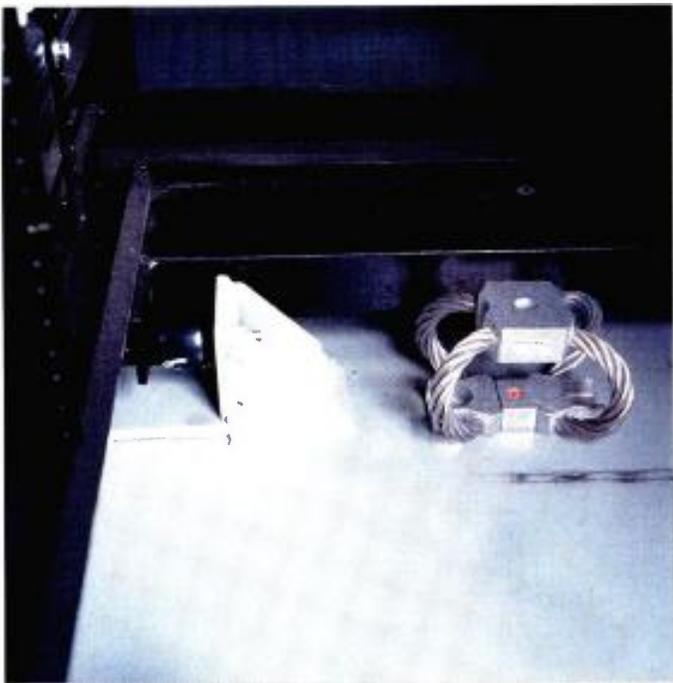

Close up view of one of the floor-mounted snubbers as well as one of the shock mounts which allow some flexibility while still restricting overall movement of the rack assemblies.



Close up of the rubber shock absorber on the tops of the racks. These are designed to soften the impact if the rack tops contact the sides of the container.

running cables from a harness into a variety of racks to multiple pieces of equipment. Cabling was neatly wrapped into place, and interconnection harnesses are stored on top of the RIB in cable troughs. High-tech (cardboard) separators were used anywhere the cabling might rub up against the racks during transit. As this is a relatively new science, there are still a few unknowns. As somewhat of a preliminary test, one RIB was shipped to Telex for installation of the intercom system, and by all accounts it fared well in the round-trip.

Although most of the equipment can be shipped fully installed in the racks, some items will be shipped separately. Large pieces of glass (monitors 14" and larger) as well as the VTRs will be installed on sight. All of the associated cabling has been tested and, if applicable, rack slides are in place so installation at the other end will be quick and easy. It is expected that 10- to 15 percent of the equipment will be rotated out of the RIBs for each Olympics. This includes equipment that is frequency sensitive (50Hz vs. 60Hz) as well as equipment upgrades that are expected as technology improves. As mentioned

the system is HDTV ready, and if it is decided that the Olympics will be broadcast in HD, that can be accommodated quickly as there is sufficient excess rack capacity planned into the overall system.

In final preparation for shipment, the RIBs get a final inspection and are wrapped in foam and then shrink wrapped. Some bags of desiccant are

---

**It is expected that 10- to 15 percent of the equipment will be rotated out of the RIBs for each Olympics.**

---

thrown in and the unit is hermetically sealed into a reusable foil bag attached to the steel floor plate. Another layer of shrink-wrap and the RIB is ready to slide into the container for shipment to Sydney. Several security precautions have been taken to ensure the equipment makes it safely across the ocean. Recorders will keep track of the G-forces encountered as well as when they occur and sufficient redundancy has been built into the overall system so that if a container does not arrive on time, it can easily be patched around.

### Collaboration

As interesting and forward-thinking as the RIBs are, what may be more important is the ongoing close collaboration between Sony and NBC. Work on this project has been underway for nearly two years. During that time, project architects have discussed feature sets, workflow options and overall system requirements with NBC

operations and management personnel. Many of their ideas have found their way into these systems. The majority of these new features are likely to become part of Sony's product line. Some of these features include things like customiz-

able router settings and tighter production switcher/DVE integration. For the most part, through this project, every aspect of the production operation has been examined from the operations side, through the eyes of NBC employees and freelancers. That input has been integrated into the system design, and the designs of current and future Sony products. Ideally, this investment will pay off for Sony, NBC and the rest of the broadcast industry as these new products and features find their way into everyday operations and workflow. ■

The Studio System  
Movie Magic Scheduling  
Movie Magic Budgeting  
InHollywood.com  
Planetpoint.com  
AnimationWorldNetwork.com  
CinematographyWorld.com  
MediaTechnology.com  
DesignInMotion.com  
DirectorsWorld.com  
PostIndustry.com  
TVIndustry.com  
EditorsNet.com  
DVDArtist.com  
VFXPro.com  
2-pop.com

APPLICATIONS

RESEARCH

DEVELOPMENT

SCHEDULING

BUDGETING

PROCUREMENT

MANAGEMENT

**Creative  
Planet.com**

The Network for Creative Professionals

COMMUNITY

DIRECTORIES

DISCUSSIONS

NEWS

EDITORIAL

AND MORE...

Circle (139) on Free Info Card

www.americanradiohistory.com



### STLs: The ignored system

BY DON MARKLEY

Let's face facts. The part of a television system that gets all of the glory is the studio. Populated by the talking heads, the studio has all of those exotic digital whiz-bangs and is the part of the station that gets the most attention. For those of us who don't normally think in ones and zeros, the RF system is still impressive and draws a lot of attention, especially when spending big bucks on transmitters and towers. The part of the overall system which is normally ignored is the lowly STL. Usually placed in the furthest and least significant rack, it is expected to be transparent to the signal and to operate continuously without problems. We need to remember that EVERYTHING goes through that little box. It is absolutely necessary to the overall system.

The advent of DTV has raised a whole new problem for TV broadcasters. The old systems simply are not

capable of handling the DTV signal. That really doesn't matter a lot as it can still be used for several years to handle the NTSC signal in many systems. The two main problem areas are where a new system needs to be installed to handle the DTV by itself or where the entire operation is to be changed to a new site where both DTV and NTSC signals will be transmitted. In either of those cases, new frequency coordination studies are necessary and new path studies may be needed.

Where the DTV facility is to be located at the existing NTSC site, the frequency coordination problem can be significant. The 7 GHz. band is full in many of the major markets which either pushes one to the 12 GHz. band or calls for more efficient spectrum usage. Thankfully, the 25 MHz. bandwidth channels, which have been assigned for auxiliary television broadcast use, will handle both the DTV

and the NTSC signals at the same time. Several manufacturers currently offer a wide range of units to accomplish this task. They mainly fall into two groups. Either the two signals are encoded into one data stream to be transmitted over a single broadband microwave system or the signals are handled on two essentially separate microwave systems that share the same channel. Both systems will meet most needs with no specific recommendation being offered here. Both systems have their advantages with the dual system offering the essentially a hot-standby when the NTSC system goes away. The NTSC channel can be converted to a second DTV channel at that time.

There is one difference that will be noted when doing path calculations. The power output on some systems is lower for DTV than NTSC. It's the old gain-bandwidth problem. When the bandwidth is expanded, the power will fall, reducing the fade margin unless larger antennas are used. Some systems show a slightly higher noise threshold for DTV as well. It's not really a problem – just something that has to be handled in the path analysis.


That leads to a topic which is often misunderstood – path reliability. For STL systems, a minimum design goal is a reliability of 99.999%. That is often referred to as "five-nines" and is a value which was long used for long-haul telephone systems. Disregard those who say that a lesser value is good enough. They are the ones who will have to answer to the suits when the picture goes away just as the swim-suit competition takes place or when the most interesting dress appears on the award show. Even "five-nines" means that you may lose the path for a second or two on rare

#### FRAME GRAB

A look at the consumer side of DTV.

#### DTV sales slowing

Are consumers holding back on new set?

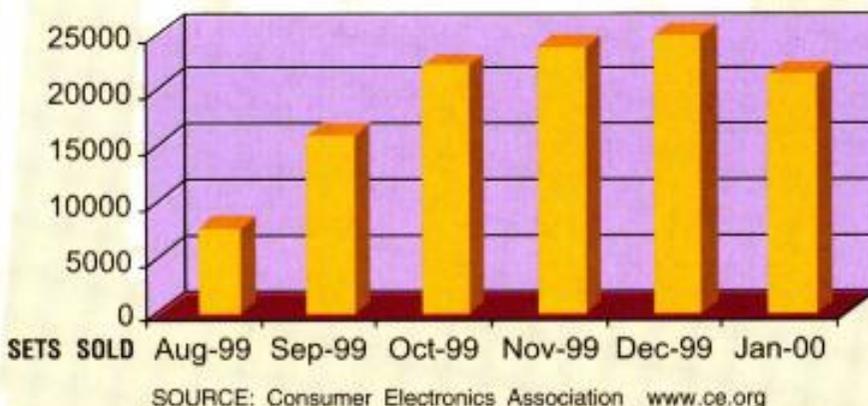

# HDTV YOUR WAY.

## Ikegami Has The "Universal" Solution.

The HDK-790D Studio/Field and HDK-79D Portable Companion cameras take the guess work out of choosing production formats. It is now possible to deliver any of the leading HDTV formats directly from one camera system with no external converters. This is made practical by 2.2-million pixel 2/3" CCDs that provide selectable native-interlace and native-progressive read-out modes. Thus, the camera can be switched to provide 1080i, 720p and 480p.

A superior quality NTSC signal is always available from the CCU for simulcast or dedicated applications. Independent adjustment of colorimetry and detail are provided in the HDTV and NTSC signal paths.

Outputs are provided for HDTV and SDTV in both digital and analog. NTSC signals can be independently switched to 16:9, 4:3 side-cut or 4:3 letterbox aspect ratios. Return video supports all these combinations as well, giving the operator a consistent HDTV display in the viewfinder.

Recent breakthroughs in advanced ASIC design provide a high quality all digital solution for camera and CCU. Introduction of new solid-type electrolytic capacitors will improve component life dramatically. Ikegami has again taken the lead in developing the most versatile camera system to address the future needs of HDTV.



**HDK-790D**



The SE-79 System Expander for the HDK-79D



**HDK-79D**

# HDTV

MULTI-FORMAT HDTV CAMERAS • SPECIALTY HDTV CAMERAS • HDTV MONITORS

Ikegami Electronics (U.S.A.), Inc. 37 Brook Avenue, Maywood, NJ 07607 East Coast: (201) 368-9171  
West Coast: (310) 370-2400 Southeast: (954) 735-2203 Southwest: (972) 869-2363 Midwest: (630) 834-9774  
Website @ <http://www.ikegami.com>

# Ikegami

Circle (140) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

occasions. However, the loss will usually be very brief and will also be very rare.

The calculation of the path reliability is usually done based on work done by W. T. Barnett and Arvids Vigants, both of Bell Telephone Laboratories. In the simplest form, the probability of path loss is given as:

$$t = a \times b \times 2.5 \times 10^{-6} \times f \times D^3 \times 10^{(-10P)}$$

where:

t = time out of service as a fraction

a = 4 for very smooth terrain including over water, 1 for average terrain with some roughness, and 1/4 for mountainous, very rough or very dry

b = 1/2 for Gulf Coast or similar hot, humid areas, 1/4 for normal interior temperate or northern, and 1/8 for mountainous or very dry areas

f = frequency in GHz.

F = Fade margin to the minimum acceptable point in dB

Again, this gives the probability of path outage. The probability that the path will not be out is the Reliability which is (1-P) x 100 in percent. Now that you know how to calculate the reliability, forget all of the shade tree-

mechanics who have cute little numbers that they think will be "enough". For most microwave systems, a fade margin of 40 dB will be a good first design goal to be adjusted after the reliability is calculated.

If there is any idea of doing path calculations, there is one book that is must for the engineer's bookshelf. "Engineering Considerations for Microwave Communications Systems" is printed by GTE Network Systems. This is a good, practical guide to system design and covers all of the calculations necessary. It is available from GTE Network Systems; GTE Network Systems Publications Manager; 400 North Wolf Road; Northlake, IL 60164. Your author apologizes for not knowing the price but his was purchased back when gasoline was under \$0.50 a gallon. This is a paperback which is as necessary for TV engineers as Carl Smith's antenna book is to AM engineers. ■

Don Markley is president of D.L. Markley and Associates, Peoria, IL.



Send questions and comments to: don\_markley@Intertec.com

## Fiber optic links for earth stations

BY HENOK TAFESE


During the past 12 years pioneering developers of fiber optic links for earth station applications have fought an uphill battle for acceptance. Using coax and waveguides to connect antennas to adjacent equipment rooms was "tried and true." New construction occurred at a steady pace, and innovation was perceived to be an unnecessary risk. Fiber optic cable use in telecommunications was still in its infancy, so prices were high. Few earth stations had enough antennas to warrant "exotic" solutions such as a linear fiberoptic link.

Today, however, there is a revolution overtaking the satellite communications industry. More and more system designers are recognizing that fiber optic interfacing links (IFLs) save time, save money

# RossGear

## TERMINAL EQUIPMENT

### ADC-8032 NTSC/PAL to 60I Decoder/Synchronizer

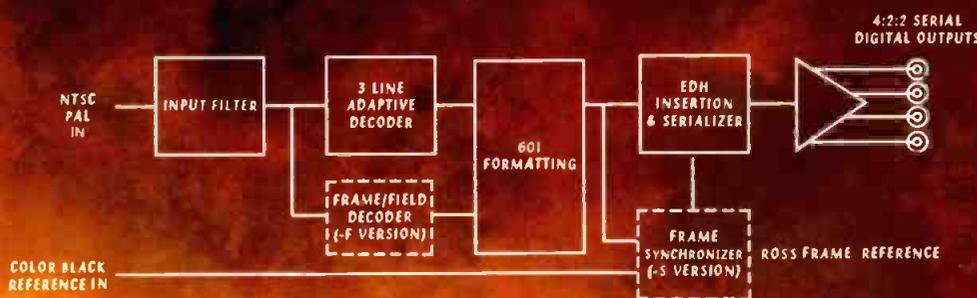

#### ADC-8032

NTSC/PAL to 4:2:2 Decoder with 3 Line Adaptive Comb Filter

#### ADC-8032-S

NTSC/PAL to 4:2:2 Decoder with 3 Line Adaptive Comb Filter & Frame Synchronizer

#### ADC-8032-F

NTSC/PAL to 4:2:2 Decoder with 3 Line Adaptive Comb Filter, Frame/Field Decoding

#### ADC-8032-SF

NTSC/PAL to 4:2:2 Decoder with 3 Line Adaptive Comb Filter, Frame/Field Decoding & Frame Synchronizer

#### ◆ 5 Year Warranty!

- ◆ Compatible with Ross 8000 Series or Leitch\* 6800 Series frames



Switchers, Keyers,  
& Terminal Gear

Tel: (613) 652-4886  
Fax: (613) 652-4425  
solutions@rossvideo.com

[www.rossvideo.com](http://www.rossvideo.com)

NAB Booth 12326

Circle (142) on Free Info Card

Come see us  
at NAB 2000  
Euphonix Booth  
#R2388!

# World Wide Audio, without leaving your studio.

**Rocket Network takes audio production beyond the boundaries of studio walls, making connections that let you work with anyone, anywhere, anytime. It's like a global multi-track, ready around the clock for musicians to lay down parts, voice-talent to deliver lines, or producers to audition mixes. No time zones, no jet lag, just pure audio productivity.**

## On-line Flexibility.

Rocket Network™ uses the Internet to allow professionals to work together on audio productions without having to be in the same physical space. Instead of shipping tapes from place to place or renting high-capacity phone lines, you log into your Internet Recording Studio, where Rocket Network handles the details of passing your parts to others and vice versa. That leaves you free to concentrate on capturing the perfect take, using your own local system to record and edit. Whenever you're ready for others to hear your audio or MIDI parts, you simply post your work to the Internet Recording Studio, automatically updating everyone else's session.

## Full Audio Fidelity.

With Rocket Network, there's no compromise in audio quality—the system handles files in a vast range of formats and compression levels, all the way up to uncompressed 24 bit/96kHz. And you don't need access to a super-fast connection; DSL or T1 is great, but you can also work productively over a humble 28.8 dial-up. The system supports multiple user-defined presets for posting and receiving, and handles all conversions, letting everyone participate in their own preferred format. That means you can conduct a session in a speedy, low bit-rate "draft" mode, then move on while the final parts are posted in the background at full-fidelity.

## Professional Tools.

Through partnerships with leading audio developers, Rocket Network is bringing RocketPower™ to the professional tools you already use, starting with Steinberg Cubase VST and Emagic Logic Audio. Because participants in a session don't all have to use the same application, you each work in whatever RocketPower environment best suits your needs. A multi-level permission system lets you control access to your Internet Recording Studio. And our RocketControl™ client offers built-in chat capabilities, so everyone in the session can chime in with feedback as the project takes shape. The Rocket Network Web site offers additional resources for audio collaboration including, software downloads, forums, and a directory of like-minded creative types from around the globe.

## A Powerful Connection.

Rocket Network adds a new level of freedom to creative collaboration, allowing you to choose your team—singers, musicians, voice-talent, composers, engineers, producers—based on who's right for the project, wherever they happen to be. With full fidelity, plus anytime, anywhere productivity, Rocket Network is a powerful new connection to the world of audio production.

Escape the boundaries of your studio walls.

Register at [www.rocketnetwork.com](http://www.rocketnetwork.com)

source code RN11



rocket  
NETWORK™  
Internet Recording Studios

and increase reliability. Simply put, fiber optic IFLs deliver higher performance for the following reasons.

The first is of course cost. Due to the surge in fiber optic use in terrestrial and undersea telecommunications, fiber optic cable is now less expensive than high grade coax. The link cost - the transmitter and receiver that converts the electrical signal to an optical one and back - has decreased by a factor of four for high volume, lower frequency applications at 70MHz and L-band. An often overlooked cost factor is installation. Fiber optic cable is compact and flexible enough to fit in tight spots, whereas coax and waveguide either fill up a conduit or require digging new trenches.

A second reason is the enormous flexibility that low loss fiber optic cable (<1dB/km) brings to the site surveyor. The rule with coax and waveguide that antennas have to be placed within 150m of the equipment room is due to their high loss characteristics. This presents at least

two problems. First, what happens when antennas have completely surrounded an existing equipment room and you have to add more, and what do you do when you're building a new earth station and the perfect location for the antenna (on a hill or atop a building) is unsuitable for a nearby equipment room? The answer is to use a fiber optic link and put the antenna and equipment room where it makes sense, independent of distance between the two. Repeaterless fiber optics span 80 km at 70MHz, 60 km at L-band, 50 km at C-band, 25 km at X-band, and 20 km at Ku-band. This has a significant impact on cost.

A third reason favoring fiber links is performance, including reliability. Literally thousands of SATCOM earth station fiber optic links have been performing reliably for many years. ISO9001 certification of manufacturers ensures quality standards. Commercially available products range from those that meet the most demanding Intelsat "A" standards to units suitable for local CATV head-

ends. Links are optimized for specific bands (IF, L, C, X, Ku), or cover widebands (0.1 to 18 GHz) for tri-band applications.

The fiber itself offers many performance advantages over coax. Since the core of fiber cable is non-conductive glass, it isolates electromagnetic interference such as lightning strikes from propagating into the equipment room, and can be run alongside power cables. It also eliminates ground loops and "hum" when cables are used between individually grounded buildings.

Bottom line? Fiber optic satellite transmission links are gaining broader acceptance with the industry now recognizing these products as a reliable, affordable coax replacement with a host of benefits for earth station operators - and the outlook is terrific for RF on fiber. ■

*Henok Tafese is product line manager of satellite communications for Ortel Corp.*

## DIGITAL UPGRADES TOMORROW? ANALOG NEEDS NOW? CAN YOUR STL EXPAND WITH THEM?



DIGITAL TRANSMITTER

### Introducing the New **StarLink™ Series**

STL/TSL/ICR

- Full analog now
- Full digital tomorrow
- Half & half anytime

STUDIO

BEAUTY SHOT

ANALOG

TRAFFIC CAM

**BMS** Broadcast  
Microwave  
Services, Inc.  
A Gohs Company

P.O. Box 84630 San Diego, CA 92138-4630  
http://www.bms-inc.com email: sales@bms-inc.com  
Fax: 858.560.1637 Phone: 858.560.8601 800.669.9667

Circle (144) on Free Info Card See us at NAB Booth #L5430



# Performance & Support

When you really get down to business, it makes sense to talk to Calrec.

Calrec produce **DIGITAL** and **ANALOGUE BROADCAST CONSOLES** for the 21st century. Through Network Operations, Local Stations and Independent Remote production companies, America listens to Calrec every day. In our 35 years of experience in Broadcasting, we have continuously pushed the boundaries. Our craftsmanship and cutting edge technology produce the highest quality products, backed by an unrivalled support team. A growing number of Broadcasters are choosing Calrec based on the performance of our products and our people.

WHEN YOU REALLY GET DOWN TO BUSINESS, IT MAKES SENSE TO TALK TO CALREC.


Circle (143) on Free Info Card

#### FOR FURTHER INFORMATION CONTACT

Studio Consultants (New York) Tel : (212) 586 7376 Fax : (212) 582 2169 e-mail : scidoug@aol.com  
Redwood (LA & Nashville) Tel : (615) 871 0094 Fax : (615) 872 7080 e-mail : redwood@isdn.net

#### CALREC AUDIO LIMITED

Nutclough Mill, Hebden Bridge, West Yorkshire, HX7 8EZ, UK  
Telephone : +44 (0) 1422 842159, Fax : +44 (0) 1422 845244 E-mail : enquiries@calrec.com Website : www.calrec.com




## A tale of the tape

BY STEVE EPSTEIN, TECHNICAL EDITOR

**H**ard as it is to believe, videotape, in one form or another, has been around for nearly 50 years. Early versions were relatively simple oxide-based designs, however, today's videotapes are a sophisticated combination of materials designed for durability, as well as efficient recording and playback of analog and digital signals. With many open reel designs, the tape container consisted of little more than a hub and some flanges. Cassette shells, on the other hand, can include more than 100 different components. For example, the cassette door used on several formats is a clam shell system that protects not only the front of the tape, but the back as well. In addition, many of these door assemblies are made from materials designed to repel dust, offering yet another level of protection to the tape within.

Although there are a myriad of designs and formulations, videotape comes in three basic flavors, oxide, metal particle and metal evaporated. Each of these basic types has evolved over the years and several variations of each exist in today's range of recording formats. In addition to these basic types, there are differences in the quality of tapes. Videotapes manufactured for broadcast and professional use are quite different from those manufactured for consumer use. Typically, professional broadcast tapes are designed to have lower dropouts, run cleaner and have higher output than those meant for consumer use. Professional grade tapes are also designed to be more durable than consumer tapes. This added durability serves two purposes: First, tapes last longer under regular use, and second, tapes can be put away in archival storage with an increased likelihood that years from now, the information on the tapes will be fully retrievable.

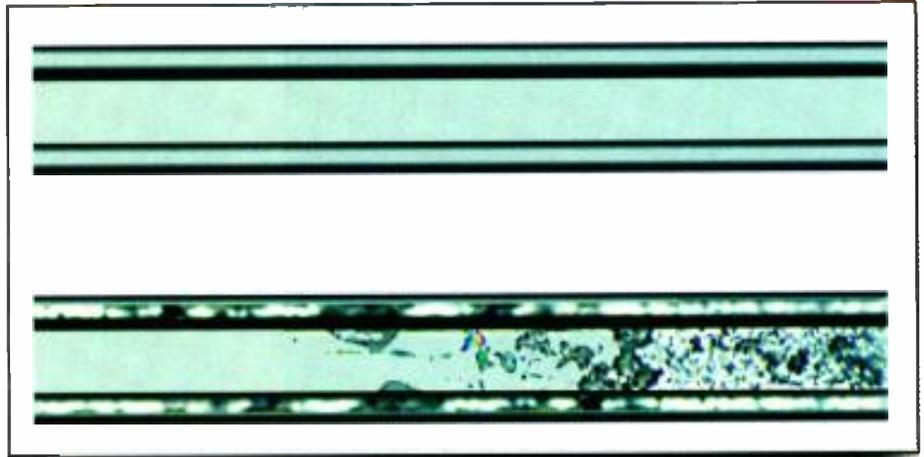

Microscopic photos of a portion of a digital video tape head. The photo on top shows a clean head, while the bottom photo shows a good view of accumulated debris. Photo courtesy of Sony.

### Care and feeding

Like most things mechanical, tapes and the machines they are used in will last longer if they receive periodic maintenance. How much maintenance varies—certainly you do not need to check the oil in your car at every stoplight. For the most part, cleaning a machine after every tape is also a bit of overkill, unless of course the tapes being used are from the '50s section of the archives and they are leaving themselves all over the machine. By the same token it is not necessary to keep the control room at cleanliness standards suitable for surgery or construction of silicon wafers. But, as they say, cleanliness is next to Godliness, and a reasonably clean environment will keep your tapes and tape machines in better shape.

Some simple guidelines include a daily cleaning of the control rooms as well as restricting or — better yet — prohibiting eating, drinking and smoking in the control room area. Machine transports should also be cleaned regularly, but how often will vary with use, tape quality (another reason for buying high quality tape) and the cleanliness of the control room area. Consider keeping a log of maintenance as well as problems such as head clogs to determine a reasonable

cleaning and maintenance schedule for the machines in your facility. You might find that some machines are best cleaned on a daily basis whereas other machines only require weekly cleaning.

Along with a clean environment, a consistent environment will prolong the life of your tapes. Both temperature and humidity should be kept as constant as possible. Humidity should be around 50 percent and temperatures should be in a range where the operators are comfortable. Obviously, little can be done to control the outdoor environment where field tapes must be used. However, what can and should be done is to provide your tapes some acclimation time when they are moved from one environment to another. Many times, field gear remains in a controlled environment of some type for all but brief periods. For instance, the gear is typically in your facility overnight, then taken to a heated or air-conditioned news vehicle. It may only be outside for 30 minutes to do a shoot—during which time it can easily be subjected to both temperature and humidity extremes. In some cases, those brief periods of exposure can do more harm than



**NAB**  
Show Special  
**20% OFF**  
All RTS TW  
Show Orders

Offer Expires  
May 1, 2000

# RTS Direct™

*The best way to buy RTS® is from the people who build it.*

## EXPERT ASSISTANCE

We design it. We build it. We know our equipment inside and out. With over 100 years accumulated experience in the design and configuration of RTS intercom systems, we've got the sound solution to whatever challenges stand in your way.

*Eastern Regional Manager*  
Stan Bryer 516-724-2411

*Western Regional Manager*  
Dave Richardson 818-566-6700

*Midwestern Regional Manager*  
Rick Fisher 248-360-0430

*Mountain Regional Manager*  
Gary Bosiacki 952-887-5512

*National Sales Manager*  
Murray Porteous 818-566-6700

*RTS Digital Matrix  
Product Manager*  
Ralph Strader 952-887-5568

*RTS TW Product Manager*  
Talal Youssef 952-887-7451

## ENGINEERED FOR YOU

Get direct access to RTS technical expertise to configure system components to meet your specific needs and stay within your budget.

## SYSTEM DESIGN

Consult with a dedicated team of RTS project engineers and use our unique design tools to create a one-of-a-kind system that satisfies your toughest requirements.

**Experience the new RTS®. Call Today.**

**1-877-863-4169**

Circle (145) on Free Info Card

See us at NAB Booth #L9366

©2000 Telex Communications, Inc.

[www.americanradiohistory.com](http://www.americanradiohistory.com)

**Telex®**

simply leaving the equipment outdoors semi-permanently, say in a vehicle trunk. Of course, there are other security considerations.

Although tape is designed to operate in extreme outdoor conditions, there are limits. For example, on a remote news shoot, the tape and camcorder may adjust to the vehicle temperature of 80 degrees (comfortable enough for shirtsleeves) with very low humidity, then suddenly be taken outside to do a shoot in freezing rain. It is very likely that problems will develop under those circumstances, or when the camcorder is brought back into the news vehicle. Sensors, such as condensation sensors, within the machine may prevent a machine's use under these circumstances. These sensors are designed to prevent damage to the tape as well as the machine and should not be overridden. Because of the changes in the physical size of the tape due to contraction/expansion, is it possible to have tracking and playback problems when the tape is returned to a temperature-controlled environment.

Providing sufficient acclimation time can reduce or eliminate many of these problems and lengthen the life of the videotape and the footage it contains.

### Mix and match formats

Today's tape machines are more sophisticated than ever, to the point where many are capable of playing back several different recording formats on more than one type of tape formulation. To some extent, this is nothing new (it was done with U-matic and U-matic SP more than 13 years ago). But, what is new is the range of conditions these machines can operate under. Both mechanical and electrical adjustments are needed to play back these various formulations, and, for the most part, these changes are made transparently under microprocessor control. Surprisingly, there are few, if any, changes necessary on the part of the customer regarding these enhanced capabilities. Although some additional recorder cleaning might be needed in some cases due to hours of use per

week and heat/humidity conditions; in a controlled environment, cleaning cycles beyond what the recorder manufacturers recommended is not required. Recorder heads and transport wear should also be monitored after use of a particular brand of tape for best compatibility.

What is more important with these machines is attention to these details. Regular cleaning needs to be done according to the manufacturer's recommendations, and this typically includes using recommended chemicals and applicators. Don't just rely on a cleaning cassette, as it only cleans the rotating heads. It does not clean the transport; that requires a manual cleaning by a knowledgeable technician or operator. Use only high-quality tape stock – do you put bargain basement oil in your car? Finally, read the manuals to ensure that your maintenance routines are covering all necessary items. If you take care of your tapes and tape machines, they are far more likely to perform when you need them. ■



**2nd hole.  
650 yards from your truck.  
The perfect place to make  
a gender change.**

The new guy just reeled off 2,000 feet of male-end cable. Then you get to the camera and find ... another male. No problem. And no need for expensive gender adapters. Just reverse the front half of your ProAx™ Triaxial Connector and you're in business. In seconds. A nifty little innovation that also makes repairing center conductors a snap. It's just one example of the tremendous thought that's gone into our new camera connectors—the first real innovation in 20 years of this under-appreciated, much-abused, indispensable network component.

Call us at 1-800-726-4266 for more information. Or visit us at [www.adc.com/Products/AVproducts/index.html](http://www.adc.com/Products/AVproducts/index.html)

**ProAx™ Triaxial  
Connectors**  
Field repairable, gender changeable



**ADC Telecommunications**

Circle 116 on Free Info Card

# STOP!

Check out hundreds of great deals at [www.dovebid.com](http://www.dovebid.com)

**DoveBid announces live Webcast auctions!  
Visit [www.dovebid.com](http://www.dovebid.com) to receive Webcast e-mail updates.**

***Video Editing***

***Video Recording***

***Video Projectors***

***Video Testing***

***Professional  
Loudspeakers***

***Densitometers***

***Audio Mixing***

***Audio Recording***

***Audio Processing***

***DAT Decks***

***Open Reel Decks***


***Rewinds***

**BID DAILY ON LIVE WEBCAST AND ON-LINE AUCTIONS.**

**DOVEBID™**  
Business Auctions Worldwide

DoveBid, DoveBid.com, and the DoveBid logo are trademarks of DoveBid, Inc. California Bond Number 57BSBA17624

Circle (147) on Free Info Card

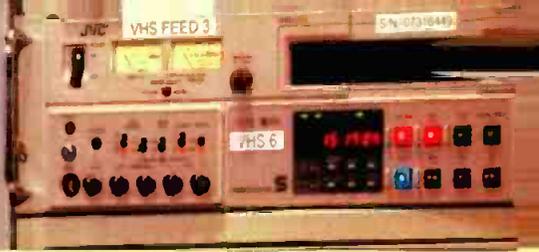

# Video over IP

speed backbones.

## Store-and-forward technology

To use an Internet analogy, real-time video delivery resembles a chat room and store-and-forward technology is more like e-mail. In order to chat with someone, you must both be connected to the Internet at the same time and actively participate in your "conversation." With store-and-forward, you set up the transmission of your material when it's convenient for you and your remote location views it when it's convenient for them, just like sending an email message.

By choosing store-and-forward technology, television stations and production facilities can transmit material to remote locations whenever they choose with complete control of the quality. For approval video, lower-resolution images can be used. Broadcast-quality material can be transmitted for future use as full-resolution, full-motion video.

This is one of the major advantages of store-and-forward technology — the quality of the transmitted video is completely separate from the network bandwidth. Whether a traditional modem, DSL, cable modem or a high-speed data connection is used, the video will be identical at the receive point. It isn't even necessary for both parties to be connected at the same speed. A slower connection will increase the transfer time, but the end result will be the same.

Another advantage to using a store-and-forward system is that both sides are insulated from network problems. If a data packet doesn't get through

correctly the first time, it can be sent again and this process is completely transparent to the user.

Every store-and-forward system uses a three-step process: encoding, transmitting, and decoding. In the encoding process, source material is converted to a compressed format (usually MPEG-2) and stored as a digital file on a local hard disk. Once that digital file exists, it is transmitted to another location using some type of network protocol. Different protocols offer different advantages, but whatever protocol is used, it must be able to properly handle large files. Finally, once the file is transmitted to the remote

---

**The quality of store-and-forward transmitted video is completely separate from the network bandwidth.**

---

location, it must be properly stored locally in its digital format with some capability for playing it back at the proper time.

At the simplest level, home PC users can capture video onto their hard disks, transmit those videos as email attachments to anyone they choose, and the recipients can watch the video on their computer screens. For this process to work in a broadcast video environment, specialized equipment is usually required. Typically, this consists of recording and/or playback stations that include specialized software and are connected to an existing network.

The system software is important because it can address two critical issues that occur when adapting this technology for professional use. The first issue relates to the requirement of storing large video files. The receiving device not only must have sufficient space to store the clip to be sent. It also must be able to guarantee that over the

transmission time period, that space will be reserved for that clip. The disk space can't be captured for another feed if that would result in an out-of-space condition for the first feed.

The second issue relates to compatibility. Nothing is more frustrating than receiving a file from another location and not being able to use it. Any store-and-forward system should be able to verify that the receiving site has the appropriate decoding software in place to view the video file being transmitted.

## The encoding process

In a traditional video environment, source material is typically received from a variety of sources and then routed as analog or digital video through the facility. In a store-and-forward system, the encoding station acts like any other destination in the video routing system. In the simplest case, it accepts an analog NTSC or PAL signal from the router. In more complex systems, the input choices may multiply. Some systems even support both NTSC and PAL video formats with some method of translating between the two.

Once the input signal is available, the next step is to create the digital file, much like the recording on a VTR, but now tapeless. Different applications may require different quality video recording. As the quality increases, so does the size of the digital file and the amount of time it will take to transmit. Approval-quality video could be encoded at a rate of 1- to 2Mb/s, broadcast-quality video might require 8Mb/s, and production-quality could demand 8- to 50Mb/s. In all cases the encoding process occurs in real time.

## Transmitting video

Once a video clip has been encoded and a file exists, the second step in the process is to transmit that file to the

desired location. Recipients are all assigned an address, much like e-mail. The sender can specify or attach the file or files, which contains the actual video. Support material including cover letters and other textual information are included to ensure that recipients have all the information needed.

The setup process assembles all this material and it is then sent, much like an e-mail or fax. The recipient machine is contacted and the file or files are transferred and stored for later use.

One relatively new development is the use of the IP protocol and IP addressing to move material between locations. This process is based on standard FTP transmission and allows any device with an IP address to transfer a digital video file to any other device with an IP address. In this way, intermediate storage devices can be used to hold (or archive) video clips. Ultimately, it may mean that any MPEG-2 compatible decoding device can receive and play files from any encoding station, as long as they both support the same video file format.

With IP addressing, the network used to move video from one location to another is essentially identical to that used for e-mail or Internet work. The ubiquitous nature of IP addressing and FTP means users can send and receive files from virtually anywhere in the world. Also, because many companies are already connected with full-time Internet connections, there are no additional connection costs associated with transmitting video clips. Think of it as sending a really big e-mail message.

Of course, nothing comes without some price. In the case of FTP and IP technology, that price is the unpredictability of the Internet itself. While the technology basically guarantees that the file will be delivered successfully (assuming sufficient local storage) there is no guarantee of when it will actually get there.

DURATION	PICTURE QUALITY	QUALITY DATA RATE (Mb/s)	TELECOM SERVICE	DELIVERY DATA RATE (Mb/s)	TOTAL TIME TO SEND hh:mm:ss
0:01:00 hh:mm:ss	Approval	1.5	ISDN 128kb/s	0.128	0:11:43
	Consumer	3.0		0.128	0:23:26
	Broadcast	8.0		0.128	1:02:30
	Approval	1.5	xDSL or Cable Modem	0.384	0:03:54
	Consumer	3.0		0.384	0:07:49
	Broadcast	8.0		0.384	0:20:50
	Approval	1.5	xDSL T1 Cable Modem	1.5	0:01:00
	Consumer	3.0		1.5	0:02:00
	Broadcast	8.0		1.5	0:05:20
	Approval	1.5	xDSL or Cable Modem	3.0	0:00:30
	Consumer	3.0		3.0	0:01:00
	Broadcast	8.0		3.0	0:02:40
	Approval	1.5	LAN 10Mb	8.0	0:00:11
	Consumer	3.0		8.0	0:00:23
	Broadcast	8.0		8.0	0:01:00

Table 2. Approximate time required to send one minute of video for some commonly available connections. Network traffic may cause total time to fluctuate.

The level of other activity on the Internet can affect the real transmission speed of files. As the amount of Internet traffic grows, the chances increase for dropped packets, requiring

**While the technology guarantees  
that the file will be delivered, there  
is no guarantee of when it will  
actually get there.**

that the data be retransmitted. This will slow the transmission process. Also, even if every packet of data gets through the first time, the number of hops encountered affects the amount of time it will take to arrive. Even with these drawbacks, the benefits of using the Internet far outweigh the negatives on a daily basis.

#### Decoding the video


The final piece of the store-and-forward process is viewing the material on the receiving station. Just as the source unit encodes the video into a digital stream, the receiving

station must decode that video and play it back as full-resolution, full-frame rate, full-screen video. This is typically handled by an external monitor or (in some systems) on a built-in viewing screen. Because further work on the video may be required, it's often necessary to be able to dump the video from the local digital storage onto production tools like VTRs and video servers. A store-and-forward system should be able to handle this by acting just like a traditional video source to the house routing system.

While the delivery of real-time video over high-speed networks is a wonderful concept, it can have significant shortcomings in practical use. Instead, the use of a store-and-forward technology, combined with IP and FTP interconnection can allow broadcasters and production houses to easily share broadcast quality material with lower costs, fewer hassles and more flexibility. ■

*Shaun Carnahan is chief technology officer for Telestream, Nevada City, CA.*

GMT	22:04
EASTERN	17:04
CENTRAL	16:04
MOUNTAIN	15:04
PACIFIC	14:04

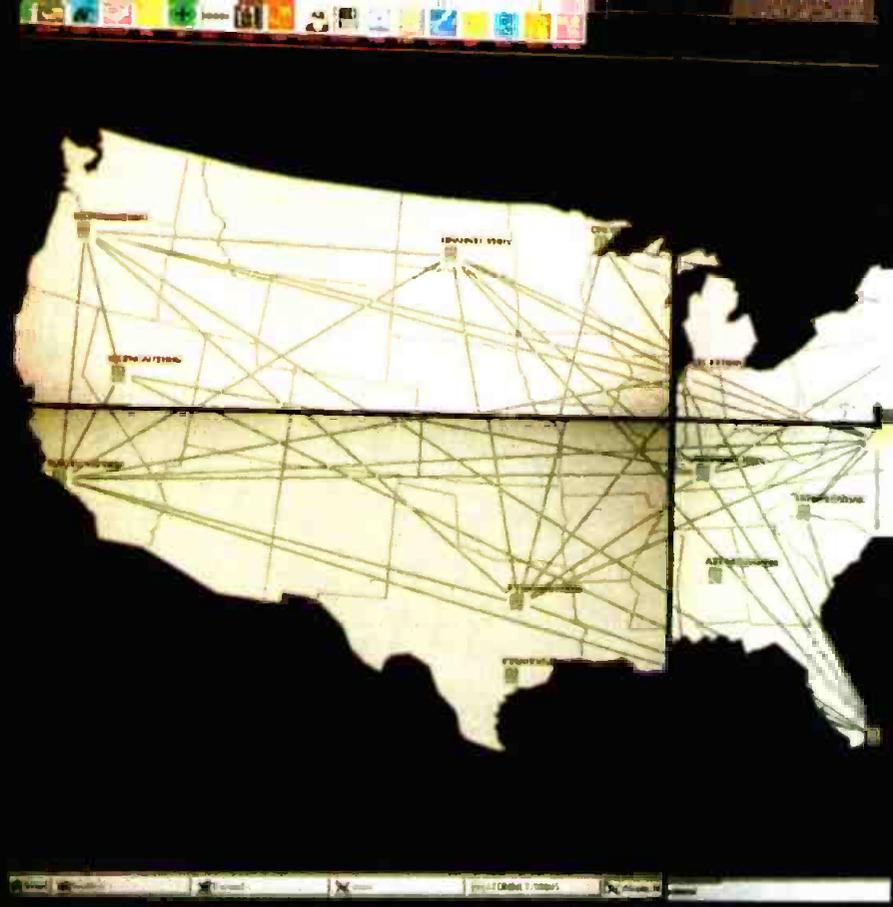

# Understanding ATM

By Jim Boston

**B**roadcasters have developed a bag of tricks over the years for moving audio and video from one location to another. Initially, the process was quite simple; the phone companies ran long runs of coax. Every so often, the video on those lines was amplified and re-equalized to restore it to a semblance of what was originally sent. The baseband nature of the video through coax meant that the signal quickly degraded over distance. Microwave systems were soon employed. The long distance carrier (it was only AT&T in the beginning) would frequency multiplex both voice and television over the same path. This path was the best transport option for broadcasters for more than 30 years. In the mid-1960s, satellite transmission was experimented with on transoceanic relays with the advent of the Telstar satellite. In the late 1970s, satellite use made the super-station and the cable channel possible. By the mid-1980s, the networks distributed their content via satellite. Local stations used satellites for back-hauling news. When microwave and coax were the only tools available for transport, most local and long-haul carriers didn't court the broadcasters' business; thus broadcasters learned how to use other transmission methods to accomplish long-distance program delivery.



Sprint Switching and Signaling Operations Group (SSO) provides around the clock surveillance and fault management of the broadband and switch network. Photo courtesy of Sprint.

### Telco tools

Although not interested in the video business through the 1980s, the telephony industry developed a large tool set to handle the emerging demand of moving data over long distances. With the large amounts of data carried by the Internet, the movement of data by the long-haul carriers is starting to rival the movement of voice. Because long-haul backbones are digital in nature, long distance voice traffic has been digital for years. This digital migration of voice traffic is making its way ever closer to the average home. Those homes and businesses

with ISDN/xDSL already have a digital tentacle of that system. Now that the television industry is realizing that video and audio streams can be thought of as just another type of data, we can start to use the same data tools offered by the telephony people.

These tools come in three types: Frame Relay, IP, and ATM (asynchronous transfer mode). We will touch on Frame Relay and IP briefly here, but ATM is the main subject. These protocols use virtual paths, meaning a connectionless path. Instead of a physically switched and dedicated path be-

tween two locations, the data from one location is merged with other traffic headed the same direction via time multiplexing. Another common point of confusion is that IP (Internet Protocol) packets can be inserted as the data payload in ATM cells. Packets and cells are different names for specified chunks of data sent at a time. IP and Frame Relay call these chunks frames, whereas ATM calls them cells. These protocols emerged because long distance data traffic evolved from being mainly text-based to being graphics-based. Data traffic can come in bursts

## Understanding ATM

and many data users require some guarantee that the data will arrive at its destination in a timely manner. Some earlier protocols existed, namely X.25, which was developed when paths were still largely analog. Because of this, X.25 had error correction capabilities not needed with digital paths. X.25 was an asynchronous system, whereas the newer protocols for the digital networks are synchronous. Additionally, an error-correction scheme known as TCP (Transport Control Protocol) was developed which wrapped the user's data, which could then be wrapped a second time in IP.

Frame Relay uses paths called Permanent Virtual Circuits (PVC) to connect end users. Many other data sessions share different links of the path, but the data carrier provisions sets up the virtual paths to be there all the time, whether the user has data to send or not. If no data was sent, the time slots (or more exactly packets) devoted to that data customer would be empty. This simplified the Switched Virtual Circuit (SVC) used with X.25. A SVC can be thought of as a phone call for data. The virtual path is set up only when data needs to be sent. One trade-off is that some time is spent setting up the call. The advantage of Frame Relay is that its frame lengths are long, generally 128 octets (1 octet = 8 bits) and up. This means that for lower bit rate paths there is less overhead. The tradeoff is that data requiring fast access to the network has to wait longer for its turn. ATM has shorter cell lengths in part to solve this.

IP is much cheaper to implement than ATM. But it is good for carrying time-sensitive material only in uncongested networks. IP traffic outside the carrier's SONET backbone is routed via routers, which are cheaper than switches. Routers are generally software-driven devices, making the prop-



Illuminet's Network Surveillance Control Center, Overland Park, KS. Control centers such as this monitor a network of public-switched telecommunications infrastructure, helping to ensure an even spread of traffic and the highest access speeds available. Photo courtesy Illuminet.

agation delay through them longer than the hardware-oriented switches used for ATM. IP doesn't generally have any Quality of Service (QoS) guarantees which are available with ATM (although some IP router manufacturers are implementing them, but they increase the overhead). QoS has various levels, as we will see. These levels provide assurances of bit rates, propagation delay through the ATM cloud, and the amount of allowable jitter. ATM is good for moving video through congested networks where QoS levels along the path need to be tunneled out. Most of us now are aware that TCP (transport layer in the OSI stack) usually rides on top of IP (network layer). But often User Datagram Protocol (UDP) is used in place of TCP, as it requires no re-send of cells that are lost (something that TCP requires). The re-sending of lost cells and the wait to assemble the re-sent cells in the proper order greatly hampers the high bit rate/real-time nature of television bitstreams.

### The telephony backbone

What actually comprises an ATM cloud? To use the ATM service of a backbone carrier, you need to gain access to the carrier. The access usually consists of using the Incumbent Local Exchange Carrier (ILEC), normally the local Baby Bell or a Competitive Local Exchange Carrier (CLEC) to provide connectivity from your facility to the ATM carriers Point of Presence (POP). Once your data is at the POP the ATM carrier charges a port charge. This is a subscription into the ATM cloud. One interesting thing about ATM tariffs is that you only pay for the amount of data inserted into the cloud, and not how far that data has to travel.

The access leg from your facility to the POP is often DS-3 (DS = Digital Service). DS-3 (often referred to as a M13 frame from a M13 multiplexer) when used for voice traffic, consists of seven DS-2 signals. Each DS-2 consists of four DS-1 (or T1 — which can carry 24 voice channels) signals. Hence a M13 multiplexer takes 28 DS-1s (the "1" part of M13) and muxes them into

one DS-3 (the "3" part of M13). When DS-3 is to be used to transport ATM, the ATM data is encapsulated into a Physical Layer Convergence Protocol (PLCP) frame. The PLCP frame has twelve 53-byte ATM cells plus framing, and parity information. PLCP allows for 40.7Mb/s of ATM cell data to be mapped into the 44.21Mb/s DS-3 payload rate. DS-3 is what usually arrives at the POP. At the POP the DS-3 is mapped onto a synchronous optical network (SONET) ring. A SONET ring's capacity is measured in Optical Carrier (OC) rates. An OC-1 ring can carry a DS-3 data stream. Our PLCP frame is mapped into an STS-1 (Synchronous Transport Signal) frame. An STS-1 frame consists of data arranged in 90 columns with nine rows. This represents 810 octets of data. But the first three octets of each row, or 27 octets, are used for overhead. 8000 of these frames are sent per second, therefore each frame is 125 microseconds long. The 27 octets of overhead are

one frame may reside in a different location in the next frame. This is due to bit stuffing. As an example, PDH would be required if DS-1 channels from far-flung locations were being multiplexed into a DS-3 stream. The propagation time from the various DS-1 sources to the DS-3 multiplexer could vary as the weather changes, or other things slightly change along the path (sun rises and warms lines causing them to expand, lengthening the route). If the signal was taking a little longer than before to arrive, an extra bit would be added to make up for the delay. Therefore the size of the frame would vary. The converse would be true as the sun set, or went behind a cloud. DS-1 was always considered synchronous by telephone engineers because a particular bit for a particular channel is always found in the same place of a DS-1 frame. Telephone engineers have moved away from PDH and it's bit stuffing approach towards the use of pointers.

streams, or 84 DS-1 streams, or 2016 DS-0 (voice) streams. A concatenated mapping where all the bandwidth is given to a single user (no digital hierarchy at all) is possible, such as to ATM users (a lower case c indicates a concatenated frame, ex. STS-1c).

OC-12 carries 12 DS-3 streams (622Mb/s), OC-48 carries an STM-16 bit stream, which handles 48 DS-3 streams. OC-192 is currently the highest bitrate. OC-192 can carry 192 DS-3 streams.

### SONET rings

On a SONET ring, you often find different kinds of traffic. Some carriers have voice, IP, and ATM traffic all traveling over the same ring. Although the different traffic can be thought of as separate virtual networks, they all travel over the same physical fiber ring in STS frames. The carrier provisions the ring so that part of the bandwidth (time) is devoted to each segment on the ring. In addition, some

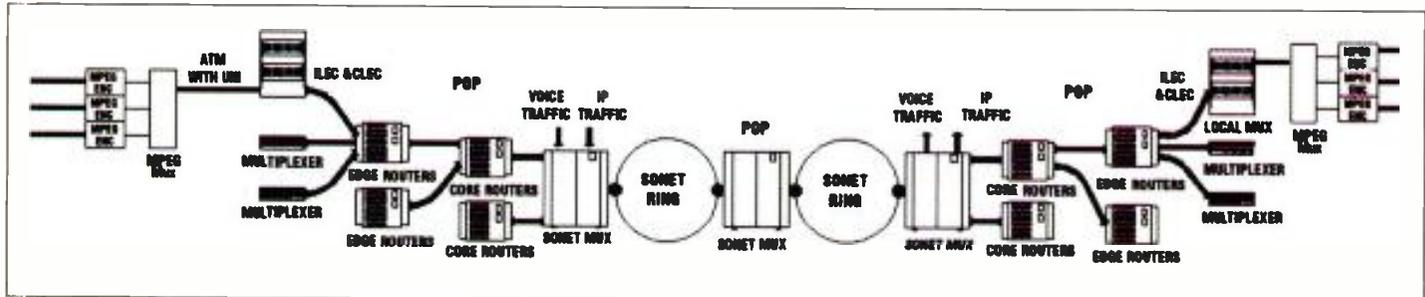


Figure 1. There are a variety of paths through the ATM cloud, but typically data will enter through an encoder, pass through some routers, through a POP and onto a SONET ring. It will then traverse one or more rings, be dropped into the POP nearest the destination and be routed on to its final destination.

used to point to where valid data starts in the frame, as the start of data does not always match the start of the STS frame (we will see why shortly). Also, control traffic and message traffic can be sent over the path using these overhead octets. The 783-byte payload can be used to carry ATM, or other types of traffic.

Originally DS-2 and above used Plesiochronous Digital Hierarchy (PDH). This means nearly synchronous, with multiple levels of multiplexing (DS-0 into DS-1, into DS-3). These are considered nearly synchronous because specific bits of information found in

This pointer is placed in the header of a frame, and it tells the receiver how far into the frame the data starts. Because of this, Synchronous Digital Hierarchy (SDH) is now used at all levels in new installations. Almost all SDH signals travel over fiber, except when undergoing switching (but that is starting to change).

One DS-3 bitstream is inserted into an STS-1 frame, which in turn is inserted into an OC-1 (Optical Carrier) stream. An OC-1 stream is 51.840Mb/s with about 8Mb/s overhead on top of the 44.21 DS-3 stream. OC-3 (155Mb/s) carries 3 DS-3

of the bandwidth will be devoted to express paths on the ring. If two nodes on opposite sides of a ring had a lot of traffic between them, a nonstop path between them would be setup. SONET works on a drop and add system. At each node, time slots that are programmed to be dropped from the SONET ring for local distribution are de-multiplexed out of the ring, and new traffic destined for long distance delivery is added. But at most nodes, some of the traffic does not undergo the drop-and-add process as it is intended for nodes farther along the ring. This is sort of a local and express

train analogy. Some traffic only has to ride the ring for a couple of stops, while some have a long way to travel on the ring and it is inefficient to stop at each node.

Most traffic is destined for places not on the closest ring. The traffic must be handed off from ring to ring to complete its journey. Places where the rings are tangent to one another usually have a super POP. At these super POPs, traffic needing to transfer to a different ring is riding in a STS frame that is dropped off the ring. It is demultiplexed and routed if it is IP, or switched if it is ATM to a multiplexer that puts it back into a STS frame. It is then placed on the new ring. If the traffic is destined to ride additional rings, it probably will be placed into an express STS frame that will not undergo the add/drop process until it reaches the super POP tangent to the next ring to transfer to.

To reach its destination, most traffic will need to travel over multiple backbones owned by different entities. This means that the data must be handed off from one company's backbone to another. This is done at Network Access Points (NAP). NAPs are usually hosted by a telecom provider. Some handle all types of traffic, some just IP traffic. There are major NAPs in New York, Chicago, San Francisco, and Washington D.C. Although hosted by one backbone provider, many other companies can subscribe to a Service Interface (SI) at a particular NAP. The Chicago NAP, which is based on ATM and hosted by Ameritech, has 100 SI connections. These connections are to other telecom companies, Internet Service Providers (ISPs), universities, and government agencies. These entities hand off traffic to each other at these NAPs. Backbone providers and ISPs that exchange large amounts of

traffic with one another often setup peering arrangements by running a path between one provider's backbone and another's backbone. NAPs and peering is what allows end-users using different access and backbone providers to communicate with one another.

When all the needed rings have been negotiated, the data is dropped at the closest POP to the destination. It then undergoes local switching/routing to arrive at the destination (See Figure 1).

## AAL

ATM is intended to be used by different types of traffic, each with its own set of requirements. Voice and video tend to produce constant bit rates, although video is usually at a much higher rate than audio. Data traffic is often bursty in nature. This means that although all bits are stuffed into ATM cells, these cells must be han-

Layer (AAL).

AAL is broken out into five types. AAL-1 specifies Constant Bit Rates (CBR) for real-time traffic. This is often used for voice traffic and WAN applications. AAL-2 specifies Variable Bit Rates (VBR) for real time traffic. AAL-3 is VBR but intended for non-real-time data traffic. AAL-1 through AAL-3 are connection orientated. This is data transmission with a pre-arranged connection. AAL-4 is the same as AAL-3 except it is a connectionless transmission. AAL-4 is used for LAN Emulation (LANE). LANE is when ATM is used to connect remote LANs so that they appear as one contiguous LAN. AAL-5 does not use the convergence data-link sub-layer. This is known as Simple and Efficient Adaptation Layer (SEAL). SEAL has the advantage of using all 48 bytes in the payload section of the ATM cell. Other ATM AALs use four of those bytes for convergence sub-layer overhead. Like the MPEG characteristic of having higher profiles and levels able to handle lower types, AAL-5 devices facilitate all the lower AALs. AAL-5 is used for LANE also. Different AALs are used to guarantee various levels of QoS.

The tariffs for the various levels of QoS can vary greatly. VBR-NT (variable bit rate — non-real time) can cost about two-thirds of what VBR-RT (VBR — real time) costs. The same ratio exists for VBR-RT versus CBR. Therefore, CBR pricing can be two and a half times what VBR-NT costs. PVCs and SVCs are priced differently also. PVC pricing is based on level of QoS and the amount of bandwidth requested, while SVC is based on QoS and the amount of data delivered to the destination. The two different services are usually priced so that PVC is cheaper if used more than 100 hours a month, up to that point SVC is more economical. PVCs have to be provisioned by the carrier. The user can not change QoS levels and bandwidths on their own. With an SVC, the user can change both attributes.

Although access and port charges can run a few thousand dollars a

---

## The movement of data by the long haul carriers is starting to rival the movement of voice.

---


dled differently to satisfy the application. The OSI data-link layer is where the software code is specialized to handle the specific application. The data-link layer is what controls the hardware layer. The data (or video or voice) is put into ATM cells in the data-link layer, which is actually split in half. The lower half, known as the segmentation and re-assembly sub-layer, is where ATM cell generation takes place. The upper half, which is known as the convergence sub-layer breaks large blocks of data handed to it from the network layer above it into smaller (often 64kB) blocks and adds error detection and data recovery overhead. Some ATM is implemented without the upper intermediate step, instead relying on upper layer protocols (such as TCP) to handle error recovery. This process at the data-link layer is known as the ATM Adaptation

month for most users, the cost of sending standard-definition video (plus audio) isn't much more than a dollar and a half per minute in many cases. Besides the access and port charges, you need an ATM edge device. This can be an MPEG mux that talks ATM. Often the MPEG mux will go to another ATM mux downstream that is handling the merging of all ATM traffic within a facility, such as voice, and LANE activity. But if the MPEG mux is to directly generate ATM it must meet a number of standards:

### ATM Cells

The simplest is to simply generate ATM cells. The 53 byte long packets have five octets (or 40 bits) of overhead in the form of a header. The header devotes the first four bits for flow control, although many ATM switches along a path combine these four bits with the next eight which are the Virtual Path Identifier (VPI). Each ATM switch encountered changes the VPI to manage handoff to the next switch. The VPI most likely will not be the same leaving the switch as it was when it arrived at the switch. A Virtual Path can carry more than one Virtual Channel. Separate services having the same source and destination, such as voice, LANE, video, audio, metadata, etc., would travel the same Virtual Path, but each would be separate Virtual Channels. Therefore the next 16 bits in the header are for the Virtual Channel Identifier (VCI). The VCI values also tend to change from switch to switch. The next three bits identify if the cell payload is user data or path setup and maintenance information. One bit is sent to indicate whether this cell has priority if congestion has mandated the dropping of cells. The final eight bits are for header error checking.

The *DTV Survival Guide* provides readers with experienced guidance in the planning and building new digital facilities. The book also examines the many new opportunities and potential pitfalls that DTV technology brings to the industry. *The DTV Survival Guide* is available from the publisher by calling 800-262-4729 or through many booksellers.



### UNI

Next on the standards list is knowing how to negotiate an ATM cloud. The standard that encapsulates that is known as the User Network Interface (UNI). This standard was developed and is maintained by the ATM forum. A lot of it is based on various International Telecommunication Union (ITU) standards and recommendations. A common ITU recommendation often quoted in telecom circles is Q2931. A lot of Q2931 was incorporated into UNI version 3.1. The current UNI version is UNI 4.0. Q2931 specifies call setup and termination, VPI/VCI assignment, QoS requests, caller ID, error handling, and peak cell rate parameters. UNI communicates to the network the AAL level that is to be used. UNI also specifies that E.164 addressing be used. E.164 is essentially the addressing scheme we use when we manually dial a long distance phone number.

In summary, ATM technology has evolved to a state where it is another tool that broadcasters can add to the backhaul and program distribution tool set. Some SONET backbone providers have extremely wide fiber paths in terms of bandwidth. Some are literally terabytes wide. Even though the movement of program material is increasingly going to be non-real time in nature (such as FTP-type file transfers), real-time program movement can today be accomplished using ATM. ■

*Jim Boston is the senior project engineer at Scripps-Howard, as well as author of a new McGraw-Hill book, The DTV Survival Guide. The author would like to thank Qwest, especially Craig Brandetsas, Sylvia McKenna, and Richard Flutem, and Rich Csontos of Marconi/Fore Systems for their guidance.*

## Common telco acronyms

AALATM	Adaptation Layer
ATM	Asynchronous Transfer Mode
CBR	Constant Bit Rate
CLEC	Competitive Local Exchange Carrier
DS-x	Digital Service
FTP	File Transfer Protocol
ILEC	Incumbent Local Exchange Carrier
IP	Internet Protocol
ISP	Internet Service Provider
LANE	LAN Emulation
NAP	Network Access Point
OC-x	Optical Carrier
PDH	Plesiochronous Digital Hierarchy
PLCP	Physical Layer Convergence Protocol
POP	Point Of Presence
PVC	Permanent Virtual Circuits
QoS	Quality of Service
SDH	Synchronous Digital Hierarchy
SEAL	Simple and Efficient Adaptation Layer
SI	Service Interface
SONET	Synchronous Optical Network
STS-x	Synchronous Transport Signal
SVC	Switched Virtual Circuit
TCP	Transport Control Protocol
UDP	User Datagram Protocol
UNI	User Network Interface
VBR	Variable Bit Rate (NT-non real time)(RT-real time)
VCI	Virtual Channel Identifier
VPI	Virtual Path Identifier

## Conversion Chart

The number of voice channels and how they fit into the various services offered.

- 1 DS-0 = 1 voice channel
- 1 DS-1 = 1 T-1 = 24 voice channels
- 1 DS-2 = 4 DS-1s = 96 voice channels
- 1 DS-3 = 7 DS-2s = 672 voice channels = 44.21Mb/s (payload)
- OC-1 = 51.840Mb/s 1 DS-3 fits into an OC-1, 192 DS-3s fit into an OC-192 (10Gb/s)

# Newstech: Weather graphics systems

## Assessing the need

Perhaps your station's system has numerous graphic capabilities, but it's inefficient: if it takes a long time to render the animations, it takes a long time to create the graphics or put together the weather show. This can hurt a station in three ways:

- **Salary overhead is needlessly inflated.** The station is operating with more people, increasing salary costs.

- **Talent is wasted.** Station personnel must spend their time drawing the weather graphics and rendering the animations when they could be using their talents elsewhere to benefit the station in other ways.

- **Dynamic gap.** If you can't compete with breaking weather news, you lose ratings share because your system cannot get the data to air fast enough in rapidly changing severe weather.

While snazzy graphics and animations are important, the bottom line is: Stations present the weather because people want to know what the weather is now and what it will be. Although it should attract people's attention, for a weather segment to ultimately capture repeat viewer interest rather than be a gimmick, weather data must be clearly and concisely presented.

For example, viewers can see the graphic and determine whether there is rain to their north and if it's going to stay there or move to where they are. Rather than having something fancy and 3D that may attract attention, eventually they will turn to a station whose graphics give them clear answers rather than just the sizzle.

Give your system a good once-over.

should demand of its weather graphics system. The following list can be your guide through your station's selection/upgrade process.

There are several keys to selecting a system that will enable your staff to move past the basic elements of segment production. The system that is right for your station should be:

- **Easy to use:**

Look for a system with an intuitive user interface that lets a user "point and click" and "drag and drop" to design weather maps. If a ten-minute demo can't highlight the system's benefits, it's too complicated.

- **Fast:** When severe weather hits your local area, your station's weather graphics system should be fast, with the ability to render animations and movies instantly, so you can break the story first. These days, your weathercaster should not



One of the key elements of a strong weather graphics system is its capacity to clearly and concisely pass information to viewers in a severe weather situation. If its graphical elements are difficult to manipulate or take too much time to render, the information displayed might not be as timely or as useful as is necessary.

If it doesn't make the grade, it's definitely worth the time to do some

---

**If stations fail to prepare,  
they might as well put a "for  
sale" sign in the window.**

---

shopping at this year's NAB. Your ratings may depend on it.

## Weather system checklist

Beyond all the bells and whistles, there is a core list of elements a station

have to spend hours creating a segment. Have the vendor put together a sample show to illustrate the system's speed.

- **Affordable:** A variety of quality weather graphics systems are available and they range greatly in price, anywhere from \$20,000 to \$150,000. Make sure the vendor will work within your station's budget and offer flexible payment plans. Additionally, the system you choose should have:

- **A unique graphic look.** Do all weather shows in your market look alike? They don't have to. A unique graphics look, with proper branding, interesting video and 3D over-

The People.

The Technology.

The Company.

Your Partner in Digital Solutions.

TANDBERG Television believes that a lasting partnership with a customer is as important as the technology we provide. And for that partnership to grow, the people and technology involved must be open enough to fulfill the broadcast demands of today, yet flexible enough to meet the unknown requirements of tomorrow.

If you would like a partner in your quest for the right digital solutions, as opposed to just another vendor, give us a call or visit our web site. Better yet, come join us at NAB—booth S4168.

**TANDBERG**  
Television

3501 Jamboree Rd. Suite 200  
Newport Beach, CA 92660  
949.725.2552  
[www.tandbergtv.com](http://www.tandbergtv.com)

Circle (149) on Free Info Card

## Newstech: Weather graphics systems

references. No system is without its bugs (especially in this quick-to-market industry) but does the vendor make an effort to correct the bugs and service your station appropriately?

- **Ample, ongoing user training.** When your station buys a weather graphics system, the weather vendor should provide four or five days of solid, on-site system's training for the station's weathercasters, graphic artists and engineers. Does the vendor offer user group sessions and/or beta testing of future upgrades and technology? Look



Although today's weathercast must be graphically engaging, ultimately it is the strength of the information you provide that will garner repeat viewership. Look for a system that gives you the flash to grab an audience and the tools to hold it.

for companies that work with their clients to continually provide training and customer feedback. After all, you're in this together.

### Streaming weather video checklist

Another aspect of a weather graphics system, one that can no longer be ignored or put off by forward thinking stations, is the ability to stream video over the Web. A large segment of your target is turning to the Web for quick updates of the present weather and the short-term forecasts. Consider your needs for the Web when evaluating your options for weather systems by asking the following questions:

- **In what format will the streaming media be delivered?** Real Media, Microsoft Windows Media and Quick Time Media — in that order. Streaming video should be available in all format delivery options. Make sure they have a concrete rollout plan for each format.

- **At what bit rates is the video encoded?** Does the vendor provide at least one stream for low-speed viewers and one high-speed solution (low speed referring to using just regular modems)? Both ends of the spectrum should be covered. You do not want to alienate any potential viewers.

- **What is the quality of the audio?** Don't take the audio for granted. When making your streaming decisions, make sure the video has high-quality audio. It does not matter how good the

# BEAT THE HEAT ...

## GO LCD!

Marshall Electronics' LCD monitors and rackmount units offer the resolution and durability of a CRT monitor without the heat, space or power consumption that CRT's need. With sizes ranging from 1.8 inch to 15 inch LCD panels and monitors, its no wonder that we are the leading supplier of LCD technology. Our VR series offers the inherent low heat and low power consumption of LCD in a rugged steel and aluminum rackmountable housing with the ability to tilt 90 degrees up or down. So call us today and experience the future of broadcast monitoring.

**Marshall Electronics**  
Optical Systems Division  
[www.mars-cam.com](http://www.mars-cam.com)

NAB 2000 Booths  
L12634 & T2632


800-800-6608

Circle (152) on Free Info Card

*Sheffield*  
AUDIO-VIDEO  
PRODUCTIONS

# Great Mobiles Of The World

Axiom-MT Digital Multitrack Console

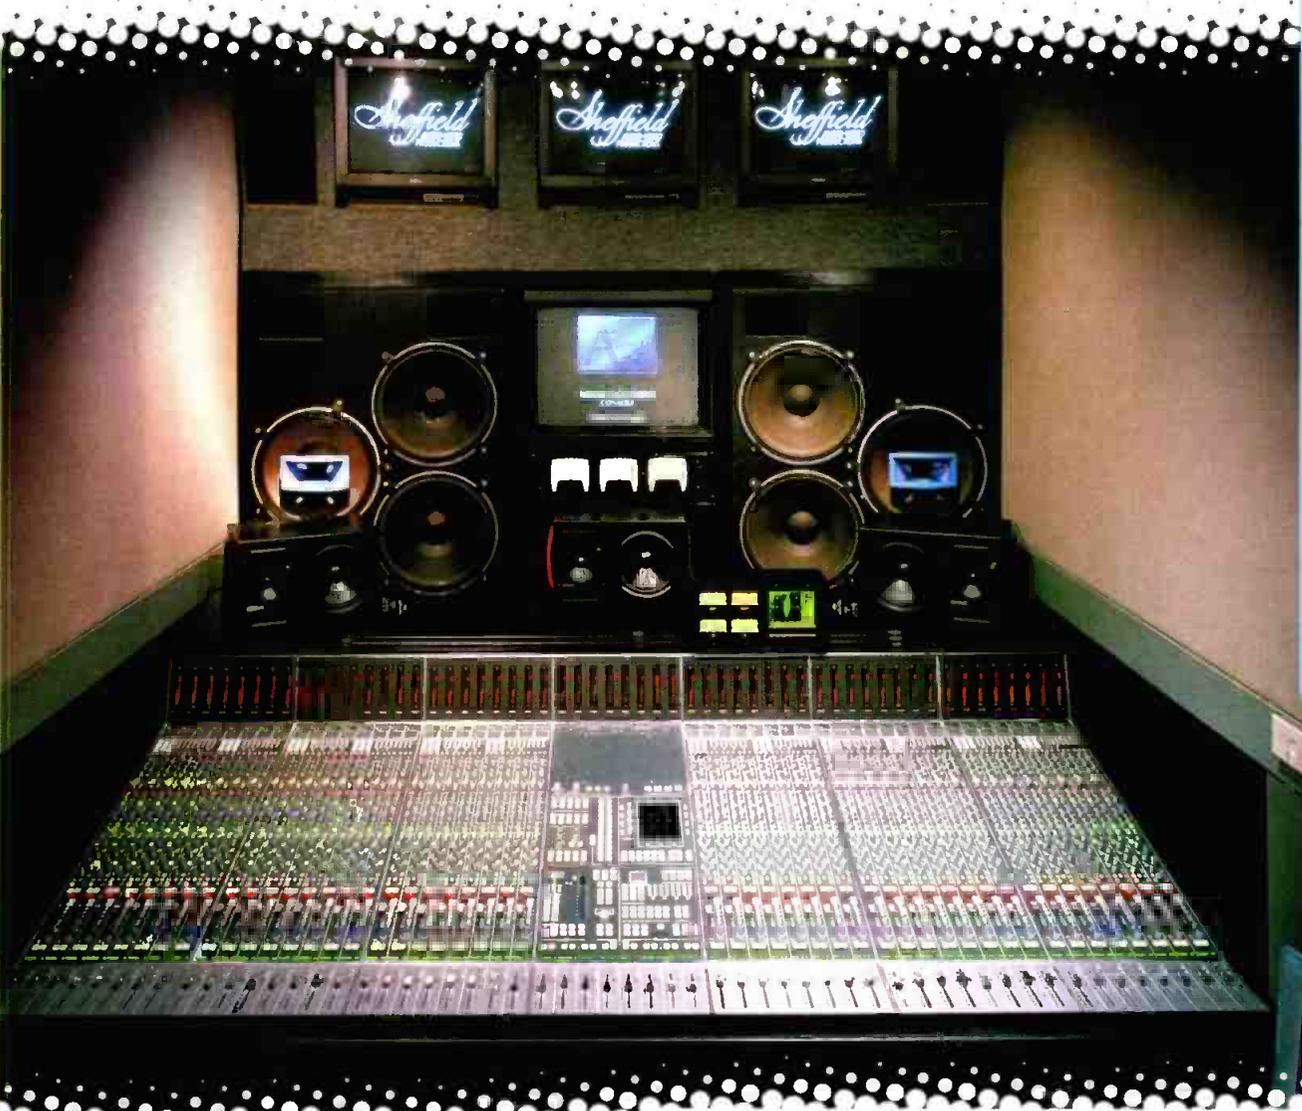

The Sheffield 48-foot truck, servicing such prestigious events as the 'Grammy Awards', 'Billboard Music Awards', 'MTV Music Awards' and 'Live from House of Blues'.



"The MT design allows us to get a full 96-input console in the space of a 48-input console and continues SSL's tradition of great sound. Engineers feel immediately familiar operating an SSL and total reset takes the pressure off when dealing with multiple acts, allowing us to fine tune every performance rather than just being grateful to get the next act on air. The MT is the ideal console for our type of business."

Richard 'Vance' Van Horn, President, Sheffield Audio-Video Productions.

Sheffield Audio-Video Productions, 13710 Sunnybrook Road,  
Phoenix, MD 21133, Business: 1-301-628-7200

## Solid State Logic

International Headquarters

Begbroke, Oxford, OX5 1RU, England

Tel: +44 (0)1865 842300

Fax: +44 (0)1865 842118

E-mail: [sales@solid-state-logic.com](mailto:sales@solid-state-logic.com)

<http://www.solid-state-logic.com>

New York  
+1 (212) 315 1111

Los Angeles  
+1 (323) 463 4441

Tokyo  
+81 (0)3 5474 1144

Paris  
+33 (0)1 3460 4666

Milan  
+39 (0)2 2328 094

Toronto  
+1 (416) 655 7792

Singapore  
+65 (0)4 38 2272

## Past, present and future trends in Weather Graphics

To keep up with the broadcast market's continuous need for bigger, better, faster and flashier, the competitive weather graphics industry must maintain a lightning-fast pace for new product development and innovation. Smart vendors guide their development based upon viewer preference surveys, by the reception of previously successful products, and from industry statistics.

### Where we've been

Over the last few years, vendors geared their product innovations toward a demand for unique weather presentations packed with animated graphics and easy to understand timeline animations. Three dimensional graphics called fly-through animations, first brought to market by EarthWatch, Inc., let a viewer actually appear to fly in the sky over a particular mountain range or cityscape and view the rain, lightning, snow or clear skies depicting the weather across the country. (For those stations that want this fly-through capability, the technology is readily available on an equal basis from all the major players in the weather business). Although these graphics are still being used in today's weather shows, their use appears to be stepping back somewhat.

Another popular trend that has become an industry norm is the use of timeline animations to show viewers current and projected weather patterns. The graphics CNN created on AccuWeather's UltraGraphix ULTRAweather system, unveiled this concept. SGI O<sub>2</sub> systems were 'the rage' back then and stations scrambled to get the system's new technology capabilities to make weather presentations unique.

*(Continued on p. 120)*

## Newstech: Weather graphics systems

picture is or how good it might look, if viewers cannot understand what is being said, they won't come back.

- What is the update frequency of the weather products? Because Internet users demand the most up-to-date forecasts, once a day updates will not be good enough to satisfy the weather needs of online users. How frequently



Several systems offer customized graphics. Station personnel can simply enter the appropriate information into the appropriate point-and-click template for use in on-air presentation.

will the vendor's products be updated? Some weather vendors do offer multiple updates; four times a day, even once an hour, are available.

- What are the vendors capabilities to cover breaking news situations? One of the most popular uses for streaming weather video is its ability to keep viewers informed of severe weather, like hurricanes, storms and tornadoes. Does the vendor have any experience providing this type of weathercast? How do they work with the station to provide the information?

- How interactive is the streaming video product? Interactivity is impor-

tant. Don't settle for regurgitated television: look for a host of rich media and flat content to support the weather video. For example, if your site offers a weather video broadcast of Hurricane Floyd, does the vendor offer links to storm history or maps of the path?

- Does the vendor have an e-commerce solution? If a viewer is watching streaming weather video about Hurricane Floyd, does the vendor offer links to buy a book about it or a poster describing how a hurricane forms. Maximize the viewing experience.

- How many ways can your station make money offering the streaming video? Some e-commerce savvy

weather vendors are offering streaming video with built in traditional banner ads, text tickers, sponsorship opportunities and co-branding partnerships which can provide new revenue 'streams' for a station.

A recent survey states that "the number one reason Internet users went to a local Internet site (a local television station or a newspaper) rather than going to a national site (like a Yahoo.com or an AOL.com) was for weather." The fact is those other sites do have local weather, your local weather, so your station has got to present the weather better than they

# Have you ever felt your MPEG-2 DVB system lacks flexibility?



## Our's Don't!

We know that as a professional broadcaster, you expect your MPEG-2 DVB system to be flexible enough to meet any of your special requirements.

That's precisely the reason to choose Tadiran Scopus with the comprehensive end-to-end MPEG-2 DVB solution, especially designed for the professional broadcaster. We embrace standards and don't create new non-standards, ensuring an open architecture and proven full interoperability. Achieve the highest quality and performance. Get the most cost-effective solution on the market for the distribution of digital video, audio and data.

CBS Newspath, Cablecom, TCI/Primer, Telespazio and other leading broadcasters already made their choice. What about you?



DVB - MPEG-2 - OpenTV  
4:2:0 - 4:2:2

**Tadiran Scopus Ltd.**  
5 Hatzoref Street, P.O.Box 267  
Holon 58102, Israel  
Tel: +972-3-557-6200  
Fax: +972-3-557-6249  
E-mail: info@scopus.co.il

**Tadiran Scopus - USA**  
12265 World Trade Drive, Suite G  
San Diego, CA 92128  
Tel: (858) 618-1600  
Fax: (858) 618-1615  
E-mail: info@scopususa.com


[www.tadiranscopus.com](http://www.tadiranscopus.com)



**Next Generation Video Compression Solutions™**

Circle (154) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

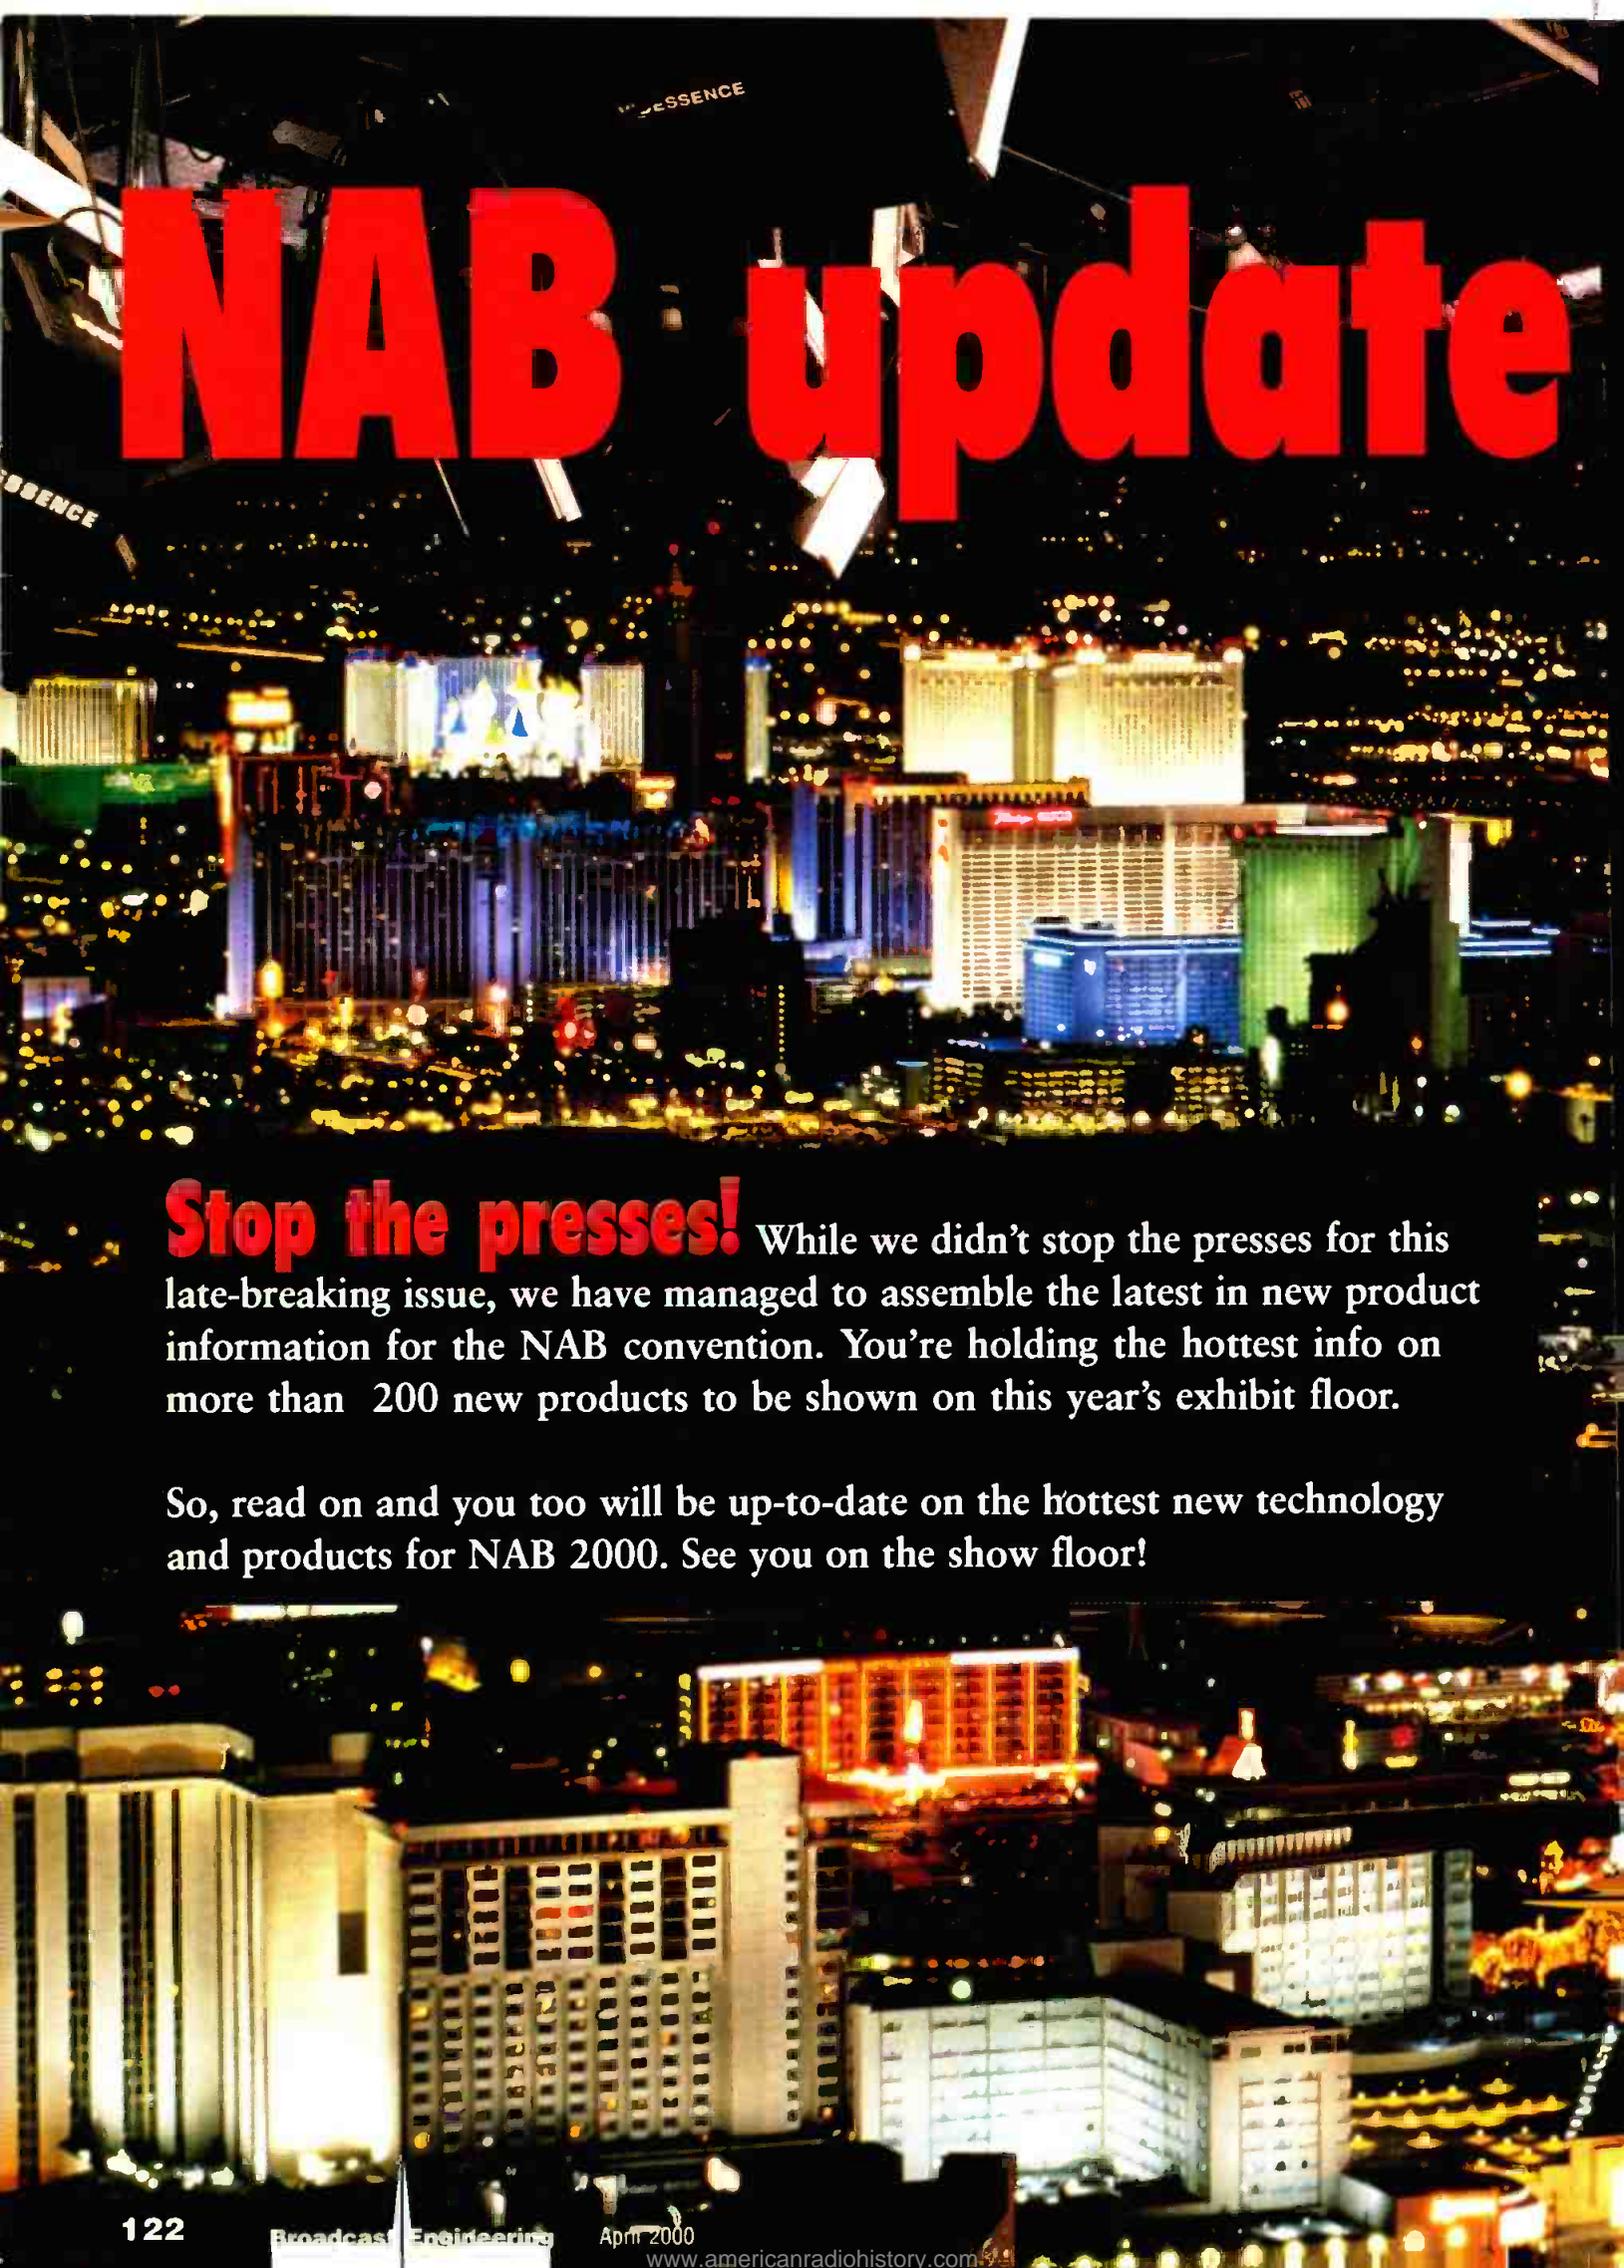

# NAB update

**Stop the presses!** While we didn't stop the presses for this late-breaking issue, we have managed to assemble the latest in new product information for the NAB convention. You're holding the hottest info on more than 200 new products to be shown on this year's exhibit floor.

So, read on and you too will be up-to-date on the hottest new technology and products for NAB 2000. See you on the show floor!



VIDEOBOND

VIDEOBOND

3 NEWS 3 WEATHER

NEWS 3 WEATHER

3 NEWS 3 WEATHER

## robotic pedestal

### Radamec RP2A:

features modified height functions, navigational improvements and adjustments to cable ergonomics; suitable for ENG and studio-style cameras and lenses; can support various teleprompters models.

877-RADAMEC; 732-246-0906; fax: 732-448-1184;  
www.radamec.com

Booth: L 2616 Circle (251) on Free Info Card



## 10-bit synchronizer

### Pixel Instruments VS-5200:

features multiformat I/Os and built-in Heterodyne TBC; serial digital, composite, analog, component analog and Y/C selectable inputs and simultaneous outputs are standard, allowing users to transcode from one format to another; the DDO pulse output of the VS-5200 is used to control the audio delay of the AD-3000 for automatic lip sync correction with analog or AES/EBU digital audio; rapid delay tracking is made possible by the automatic pitch corrector in the AD-3000.

408-871-1975; fax: 408-871-1976;  
www.pixelinstruments.com

Booth: L 3529 Circle (257) on Free Info Card

## Switchable camera

### Ikegami HK-388/388W studio/HK-388/388PW portable NTSC:

offers 12-bit digital processing; converts the aspect ratio between 4:3 and 16:9 in the HK-388W and HK-388PW; component triax and fiber cable systems are available together with interface accessories for existing RGB triax; employs high-density HK-388 and HK-388P have 520,000 pixel 2/3-inch FIT CCS image sensors.

201-368-9171; fax: 201-569-1626; www.ikegami.com

Booth: L11831 Circle (252) on Free Info Card

## RAID system

### DataDirect Networks EV-5000 Fibre Channel Network RAID System:

a fast Fibre RAID System with over 190MB/s sustained throughput; a high-performance, scalable cross-platform, network data access storage solution for image-intensive, heavy-duty online media streaming, broadcast post production and special effects use.

800-322-4744; 818-700-7600; fax: 818-700-7601;  
www.datadirectnet.com

Booth: S 3427 Circle (260) on Free Info Card

## Digital video and audio interfaces

### Miranda Technology Imaging Series of digital video and audio interface:

includes a new set of modules designed for the conversion and processing of incoming video and audio feeds into a component digital facility; converters are designed to fit into the Miranda Symphonie 16-slot, 4RU or Quartet 4-slot 1RU modular frames and provide a complete feature set; modular design permits high density of up to four channels of video processing or two channels of video and audio processing per RU.

514-333-1772; fax: 514-333-9828; www.miranda.com

Booth: L 3330 Circle (254) on Free Info Card

## Uncompressed quality, WinNT NLE

### United Media On-Line Express 2.5:

real time video editing software operates in Windows NT; it provides Uncompressed Video Quality and is a professional finishing tool allowing complete creation of high-quality video and audio content; the software supports multi-format input and output in component, composite and YC video formats for real time editing and effects; the software is available as an upgrade for On-Line Express or as a new purchase.

714-777-4510; fax: 714-777-2434;  
www.unitedmediainc.com

Booth: L 9731 Circle (255) on Free Info Card



## 16:9 HD monitor

### Panasonic AT-H3017W:

30-inch, 16:9 aspect ratio HD monitor with the ability to display 1080i, 720p, 480p and 480i images; delivers greater than 1000 TVL horizontal resolution because of a temperature-compensated shadow mask CRT with a 0.36mm dot pitch and SMPTE-C phosphors; features selectable color temperatures of 6500, 9300 and 3200degreesKelvin and multizone convergence and beam landing control with user presets.

800-528-8601; 323-436-3500; fax: 323-436-3660;  
www.panasonic.com/broadcast

Booth: L 8236 Circle (264) on Free Info Card

# FISCHER® Has Great



# CONNECTIONS

## In the Broadcast Industry.



You'll like what you see in the new Series 1052 Video Triax System from Fischer® Connectors. These high-quality connectors are specifically engineered for the American broadcast industry and provide the performance and availability you need, at the price you want.

- In stock for rapid delivery.
- Fully compatible with the American Triax Standard.
- Gold-plated signal and power paths.
- Unparalleled reliability.
- Robust design and integral sealing – ideal for indoor and outdoor use.



The Fischer Video Triax Connector System includes plugs and receptacles for cable or panel mounting, as well as accessories and assembly tools. When you need performance and price in a video triax package, picture the Series 1052 – The new American Standard.



For more information about the extensive line of Fischer connectors, please contact us at:

800.551.0121  
Fax 770.352.0992  
mail@fischerconnectors.com

Or visit our website at:  
[www.fischerconnectors.com](http://www.fischerconnectors.com)




## FISCHER® CONNECTORS

Connect To The Future™

© 2000 Fischer Connectors, Inc.  
Connect to the Future™ is a trademark of Fischer Connectors, Inc.

Circle (156) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

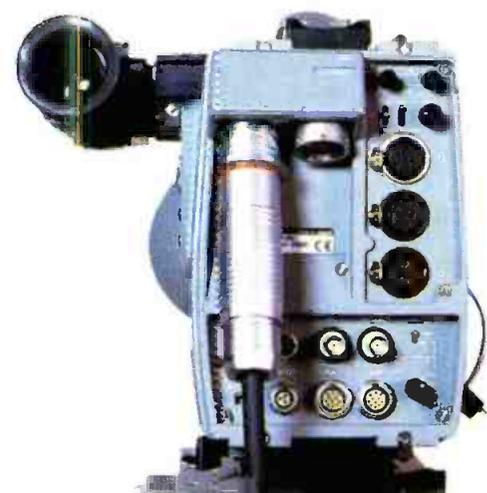

## Station automation system

### Odetics AIRO:

integrates network feeds with local program origination and local spot insertion; scales to address a broad range of applications; automatically imports traffic schedules and appends them to current schedule; easily merges updated schedules.

714-774-2200; fax: 714-780-7594;  
[www.odetics.com/broadcast/](http://www.odetics.com/broadcast/)

Booth: L 9341 Circle (271) on Free Info Card

## Media management and distribution center

### Sun Microsystems StorEdge Media Central Platform:

this comprehensive, scalable system allows broadcast, cable, satellite and entertainment companies to leverage their content across communications mediums ranging from high resolution television broadcasts to low-bandwidth, Internet-based and interactive media; it also provides live streaming of ongoing events, playout of pre-planned programming and storage of programming for reuse; for flexibility, it can be used to play-to-air over a terrestrial network or to a closed-circuit cable set-top environment; 415-969-1300; fax: 650-473-7101; [www.sun.com](http://www.sun.com)

415-969-1300; fax: 650-473-7101; [www.sun.com](http://www.sun.com)

Booth: M 8745 Circle (273) on Free Info Card

## Data encoder

### Norpak TES7 VANC Data encoder platform:

encodes, inserts, receives, bridges and multiplexes data in the VANC space of SMPET 292M TV signals; ideally suited to encoding closed captioning and ATVEF URLs for HDTV broadcasts.

613-592-4164; fax: 613-592-6560; [www.norpak.ca](http://www.norpak.ca)

Booth: I 6815 Circle (265) on Free Info Card

## Conditional access system

### Canal + Technologies Mediaguard:

a digital conditional access system for subscriber and transactional pay-TV; supports several payment methods; scalable to the operators' specific requirement and system architecture.

+33-1-71715715; fax: +33-1-71715578;  
[www.canalplus-technologies.com](http://www.canalplus-technologies.com)

Booth: S 5072 Circle (253) on Free Info Card

## 10-bit noise reducer

### Leitch Lynx:

is adaptive field-based and offers recursive noise reduction, full proc-amp controls, frame synchronization, internal test generation and flexible I/O interfaces.

800-231-9673; 757-548-2300; fax: 757-548-4088;  
[www.leitch.com](http://www.leitch.com)

Booth: L 9328 Circle (275) on Free Info Card

# F A B F O U R



200 Series Enclosures

ConRACKtor Series

Seismic Series

Broadcast Rack

Manage and organize your media and equipment with the cabinet system worthy of your most critical electronic assets. APW's modular cabinets are designed for versatility, value, strength, and space savings. As the largest enclosure manufacturer in the United States, APW has the most comprehensive offering of Audio/Video and Broadcast storage solutions available. Plus, our products are backed by APW's unique Lifetime Warranty.



Contact us today for your  
FREE AVB Solutions Catalog.  
Call: 800.991.1270 or  
E-mail: [mktg@apw-enclosures.com](mailto:mktg@apw-enclosures.com)  
[www.apw1.com](http://www.apw1.com)



Circle (125) on Free Info Card

## MPEG transport monitor

### Tektronix MTM300:

a multi-stream remote monitoring tool for detecting errors in the MPEG-2 protocol in DVB and ATSC transport streams; user interface for immediate notification and an in-depth analysis mode are available; conforms to industry standard tests and physical interfaces; testing ETR290 helps identify synchronization, decoding and metadata problems; can simultaneously monitor up to eight transport streams.

800-426-2200; 503-627-7111; fax: 503-222-1542;  
www.tektronix.com

Booth: L 913 Circle (281) on Free Info Card

## Troubleshooting instrument

### LG Electronics StreamScope MT-10:

provides a cost-effective monitoring and troubleshooting solution for DTV broadcast Stations; able to monitor, measure, record and analyze vital parameters in a ATSC DTV broadcast stream; pays broadcast DTV video and audio, monitors 8VSB signal quality; monitors audio and video buffers usage; records and plays transport streams; analyzes contents of transport streams, including packet contents and PSIP table contents.

609-716-3505; fax: 609-716-3503;  
www.lgerca.com

Booth: Circle (278) on Free Info Card

## Tally mapping and routing unit

### Videoframe Tally Mapper:

tally mapping and routing unit has been enhanced to include TTL inputs; tallies can be remapped with a single button; a flexible solution for difficult tally control problems.

530-477-2000; fax: 530-477-7599;  
www.videoframesystems.com

Circle (276) on Free Info Card

## Megapixel flat panel display

### Sony PFM-510A1WU:

a 42-inch HD flat panel monitor with a 16:9 aspect ratio and 1024x1024 resolution; features a depth under six inches; offers 30 percent more brightness than the 5000A1WU at the same power consumption.

800-686-SONY; fax: 201-930-4752; www.sony.com/professional

Booth: L12107 Circle (277) on Free Info Card

## Video scaler

### Analog Way SMART CUT 2:

combines functions of an advanced video scaler with five video and two computer inputs; also provides switchable stereo audio on each of the seven inputs.

212-269-1902; fax: 212-269-1943; www.analogway.com

Booth: M10171 Circle (280) on Free Info Card



Visit us at  
NAB 2000  
Booth  
#L6733

TH 770 IOT  
60 kW NTSC  
25 kW 8VSB

Whatever your application— analog or digital—our line of plug-in IOTs provides the solution. The same tube can be used either for NTSC or digital TV (8VSB and COFDM). Which means no more hassle with multiple references. In fact, no more hassle, period: The tube's easy plug-in installation means you don't have to remove the cavity. Making your life simpler from ordering to operation. The bottom line is our tubes save energy. Yours. For more information, e-mail us at: info@tctus.com

**Analog & Digital**  
A lot more versatility. A lot simpler for you.

**THOMSON COMPONENTS AND TUBES Corp.**  
You need it, we'll supply it

www.tctus.com

Circle (158) on Free Info Card

Color listings indicate Issue advertisers

April 2000

Broadcast Engineering

127

www.americanradiohistory.com

## 4:2:2 and 4:2:0 MPEG-2 IRD

### Tiernan Communications TDR600:

1RU decoder; factory configurable for QPSK, QAM or OFDM with conditional access, over-the-air download, one stereo pair video, supports both SCPC and MCPC applications, ideal for contribution or monitoring production vehicle, ideal for OEM.

800-323-0252; 858-587-0252; fax: 858-587-0257;  
www.tiernan.com

Booth: S 4162 Circle (261) on Free Info Card


## Online logo inserter

### Leitch LogoMax:

a broadcast quality "drag-and-drop" online logo inserter for post-production and television environments; can insert hundreds of SDI or HD logos with audio on the on-air signals.

800-231-9673; 757-548-2300; fax: 757-548-4088;  
www.leitch.com

Booth: L 9328 Circle (274) on Free Info Card

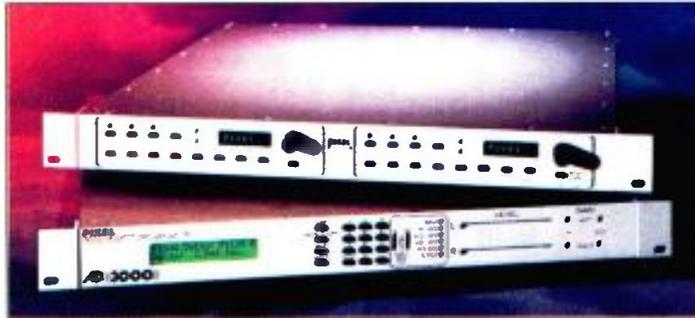

## Audio synchronizer

### Pixel Instruments AD-3000

this audio synchronizer is intended for automatic lip sync correction (with the VS-5200, for example) and general purpose audio delay applications; built-in pitch corrector allows rapid delay change with minimum audible artifacts; includes standard stereo analog, AES/EBU digital (balanced) and SMPTE digital (unbalanced) I/Os.

408-871-1975; fax: 408-871-1976;  
www.pixelinstruments.com

Booth: L 3529 Circle (258) on Free Info Card



## HD fiber optic transmission link

### Force Inc DTV Linx:

designed to transport a variety of datastreams and standards, including SMPTE 259M, 292M, 305M, 310M, CCIR 601, SONET and ATM.

800-732-5252; 540-382-0462; fax: 540-381-0392;  
www.forceinc.com

Booth: S 5357 Circle (259) on Free Info Card




## Digital satellite news van

### Frontline DSNG-350:

features excellent engineering, power and weight distribution; features fourth rack with exterior access for separate DSNG area and rack space for EFP equipment.

727-573-0400; fax: 727-571-3295;  
www.frontlinecomm.com

Booth: L12386 Circle (262) on Free Info Card

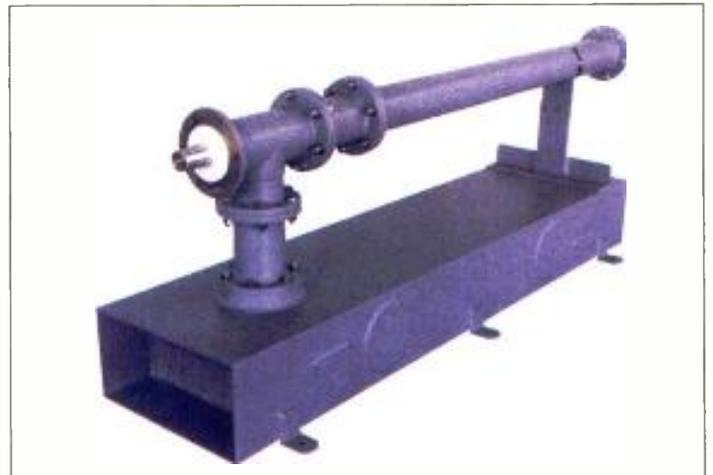

## UHF/VHF coupler

### Micro Communications Duoband Combiner:

couples two signals into an existing transmission line; decouples two signals at the tower top with no interference between them; designed to allow the new DTV UHF signal to be combined with either an existing VHF or FM signal; can combine a LoV with UHF, HiV with UHF or FM with UHF signals.

800-545-0608; 603-624-4351; fax: 603-624-4822;  
www.mcibroadcast.com

Booth: L10374 Circle (263) on Free Info Card

## Video/SVGA flatpanel monitor

### Ergo 2000 E2CK55L:

features a maximum resolution of 1280x1024; offers composite and S-video inputs; VGA/SVGA/XGA compatible; optional touchscreen available.

800-635-9297; 714-992-0874; fax: 714-992-2131;  
www.ergoind.com

Booth: I 5739 Circle (295) on Free Info Card

## HD/SD telecine

### Cintel Rascal:

based on the chassis and transport of URSA Gold; expands capabilities to multistandard film transfer operations, standard-definition and high-definition formats including 1080/24p.

805-294-2310; fax: 805-294-1019;  
www.cinteltelecine.com

Booth: L 6344 Circle (293) on Free Info Card

## Composite wfm/vect w/audio

### Hamlet LCD Scope 400:

Features include four composite and audio input channels, waveform, vectorscope and audio bar graph, standard PAL and NTSC operation and gamut violation display and alarm.

+44 0500 625 525; +44 1494 793 763; fax: +44 1494  
791 283; www.hamlet.co.uk


Booth: L11855 Circle (297) on Free Info Card

## HD camera cable

### Telecast Fiber Systems HDTV Cobra:

Extends HD cameras with fiber and can support multiple digital cameras on one lightweight tactical fiber cable.

508-754-4858; fax: 508-752-1520;  
www.telecast-fiber.com

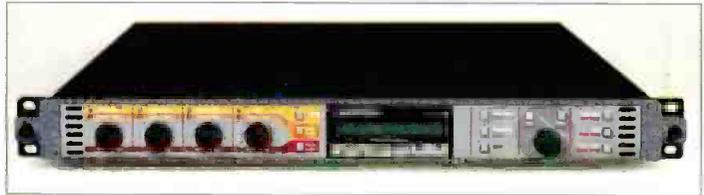

## Format converter

### Leitch DFS-3005:

designed for hybrid conversion and synchronization applications; remote control panels network multiple units to central control location.

800-231-9673; 757-548-2300; fax: 757-548-4088;  
www.leitch.com

Booth: L 9328 Circle (290) on Free Info Card

## MPEG-2 transport stream server

### Viewgraphics DTV:Xstream:

combines MediaPump XL technology with the Hewlett Packard NetServer LPr 2RU rackmount PC server; provides a bidirectional DVB-ASI, DVB-LVDS or DHEI interface that handles high bandwidth bi-directional multiplexing and demultiplexing stream processing, clean-cut splicing, table generation and transmission and supports bit-rates over 150Mb/s.

650-903-4900; fax: 650-969-6388;  
www.viewgraphics.com

Booth: S 4745 Circle (310) on Free Info Card

Visit us at  
NAB 2000  
Booth  
#L6733

TH 755 IOT

The TH 755 IOT. A whole new replacement solution. It's 100 percent interchangeable with other makers' tubes of the same power class. And it's 100 percent easy to make the change because you can keep

**A new alternative.**  
**A direct replacement. A direct new way to save.**

your original cavity. But the benefits don't stop there. Like all our IOTs, the TH 755 delivers outstanding operating stability, constant gain, a long lifespan, and cost savings in both acquisition and operation. And it delivers them by design. For more information, e-mail us at: info@tctus.com

www.tctus.com

**THOMSON COMPONENTS  
AND TUBES Corp.**

You need it, we'll supply it

Circle (159) on Free Info Card



**HD monitoring down converter  
Astro Systems SC-2034:**

features HD YPbPr input and NTSC output; three grati-  
cule overlay includes center marker, 4:3 safe zone and  
frame; include DC 12V input

818-244-1806; fax: 818-244-1878;  
www.astro-systems.com

Booth: S 3877 Circle (289) on Free Info Card

**PSIP manager**

**Harris PSIPplus/PSIP.com:**

gathers, manages and disseminates PSIP data, including  
local system time, program guide and rating information,  
extended program descriptions and virtual channel  
information; offers easy-to-use local program editing  
capabilities; PSIP.com is a server that automatically  
downloads program guide information into the PSIPplus  
server daily.

800-622-0022; 513-459-3400; fax: 513-459-3890;  
www.harris.com

Booth: L 6524 Circle (298) on Free Info Card

**Digital audio sample rate  
converter**

**NVISION DA4050:**

locks an asynchronous signal to local house reference;  
converts between different sample rates; offers two AES  
I/Os; 110- or 75Ω connectors.

800-719-1900; 530-265-1000; fax: 530-265-1010;  
www.nvision1.com

Booth: L 543 Circle (283) on Free Info Card

**4:3 and 16:9 front-lit test  
charts**

**DSC Labs CamAlign:**

a series of test charts to optimize the performance of  
professional video cameras; patterns include standard  
crossed greyscales, vector colors, multibursts, flare tests  
and hyperbolics; available in 4:3 and combines 16:9/4:3  
formats.

800-267-5227; 905-673-3211; fax: 905-673-0929;  
www.dsclabs.com

Booth: L 9524 Circle (294) on Free Info Card

**Desktop video system  
Blossom Technologies Fury X2:**

features dual 500MHz Xeon III processors; 1GB of  
100MHz memory; five hours of high quality video  
storage, built-in 3 DVE effects and SDI; offers 350 real-  
time transitions and real-time linear  
keying, luma keying, chroma keying ,  
serial digital I/O and 3 DVE with over  
400 SD effects and dual monitor  
support.

305-266-2800; fax: 305-261-2544;  
www.blossomvideo.com


Booth: I 6539 Circle (279) on Free Info Card

**Professional video  
networking system  
PixStream VDS5000:**

provides professional MPEG-2 video  
networking solutions; it allows  
multiple channels to be demodulated,  
descrambled, encoded, decoded,  
multiplexed and remultiplexed from  
variety of broadcast audio and video  
sources; the channels are then  
adapted to various telecommunica-  
tions networks; it is designed for TV  
content redistribution and video  
courier applications and  
integrates seamlessly into terrestrial,  
satellite, cable and wireless infra-  
structures.

519-884-4196; fax: 519-884-9892;  
www.pixstream.com


Booth: Circle (300) on Free Info Card

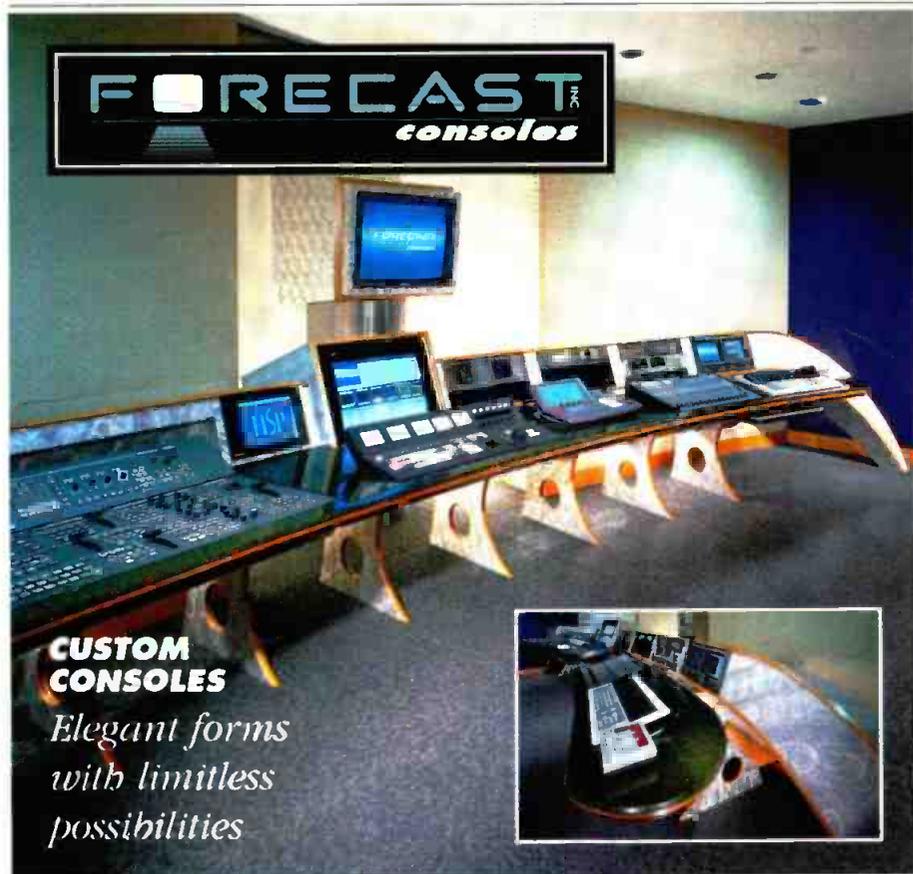

SETTING NEW STANDARDS OF EXCELLENCE, ENGINEERING & DESIGN

**1 • 8 0 0 • 7 3 5 • 2 0 7 0**

Or Contact Your Local Forecast Distributor **www.forecast-consoles.com**  
Circle (161) on Free Info Card

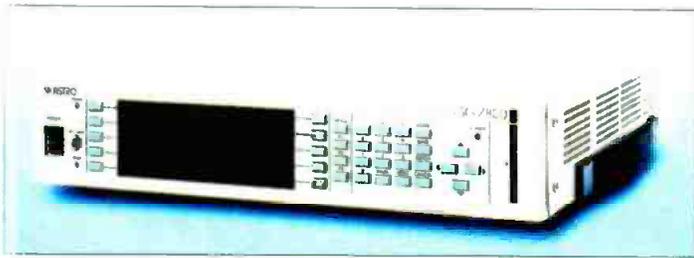

### HD test signal generator

#### Astro Systems SG-7800:

a video signal generator for HDTV SDI; supports 1080i, 720p and 1080p24; provides functions including audio output, pattern edit, virtual motion and user BMP data availability.

818-244-1806; fax: 818-244-1878;  
www.astro-systems.com

Booth: S 3877 Circle (288) on Free Info Card

### Live sports broadcasting system

#### Orad CyberSport:

a live sports broadcasting system featuring graphical capabilities and match analysis features such as insertion of virtual runners and record lines; real-time system uses microwave technologies to track and identify players and the ball in real time; instant animated graphics of the game highlights can be broadcast live over the Internet.

212-931-6723; fax: 212-931-6730; www.orad-ny.com

Booth: S 3132 Circle (282) on Free Info Card (285) on Free Info Card

### Analog/digital transmitter

#### Rohde & Schwarz NH7000/NV7000:

a new generation of compact transmitters for analog and digital transmission; feature liquid cooling and a special hardware concept.

+49-89-41292931; fax: +49-89-41291211; www.rsd.de

Booth: L 4758 Circle (304) on Free Info Card

### Audio codecs

#### AEQ ACD-5001, MPAC-02

a dual multiformat audio codec for ISDN lines equipped with full-duplex intercom allowing a simple and independent communication with both audio channels, without external wiring and operations.

+34 91 686 13000; fax: +34 91 686 44 92; www.aeq.es

Booth: R 4066 Circle

### Diffusion effects

#### Tiffen Mfg Corp Black Diffusion/FX and Gold Diffusion/FX:

eliminates unwanted details in close-ups, especially facial close-ups; suppress blemishes and wrinkles while maintaining a clear focused image.

800-645-2522; 516-273-2500; fax: 516-273-2557;  
www.tiffen.com

Booth: L11581 Circle (315) on Free Info Card

Visit us at  
NAB 2000  
Booth  
#L6733

When you need support, you need it fast. At Thomson Components and Tubes we make sure you get it. In addition to our sales force, we also deploy a technical team that provides full support with timely consulting and assistance services during both equipment definition and


**Total availability in real time.** You want it. You've got it.

installation of our products. Across North America, coast to coast. Our broadcast tubes are directly available off the shelf from our extensive stocks in Totowa, New Jersey. Whenever you need them. For more information, e-mail us at: info@tctus.com or call us at (973) 812 9000.

**THOMSON COMPONENTS AND TUBES Corp.**  
You need it, we'll supply it

www.tctus.com

Circle (160) on Free Info Card

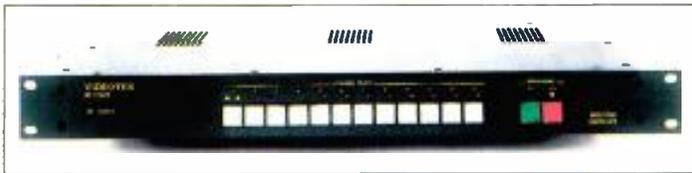

**AES routing 12x1 and dual 12x1 Videotek RS-12AES:**

flexible 12x1 and dual 12x1 digital audio routing switchers designed to operate as companions to any other Videotek RS-12 analog, digital or high-definition video router or separately as a stand-alone unit; also supports remote control from RS-232 or RS-422 devices with a variety of standard switcher protocols.

800-800-5719; 610-327-2292; fax: 610-327-9295;  
www.videotek.com

Booth: L12924 Circle (291) on Free Info Card

**3D broadcast graphics & CG system**

**RT-SET Antero VS:**

is a 3D on-air broadcast graphics and character generator package integrated with a full-blown virtual studio; it functions as a fully integrated system for single operator live-to-air production; this system's web-based real-time interface provides the user with maximum power and control and allows functions such as the fast change of virtual sets, realistic graphics, live-to-air facility, video inserts and clip effects; 877-955-2230; 212-463-9902; fax: 212-463-9931; www.rtset.com

877-955-2230; 212-463-9902; fax: 212-463-9931;  
www.rtset.com

Booth: S 6551 Circle (305) on Free Info Card



**Newsroom nonlinear editing system**

**Panasonic NEWSbyte:**

new version adds 40 new functions including the ability to digitize and display 16:9 aspect ratio footage, sequential file import with Alpha channel, import and export of user settings, networkable bins, EDL import/export and redigitizing, audio EQ and reverb and savable customized video modifications; newsBYTE system features a built-in DVCPRO 4x recorder player with disk transfers at 4x faster than normal speed.

800-528-8601; 323-436-3500; fax: 323-436-3660;  
www.panasonic.com/broadcast

Booth: L 8236 Circle (267) on Free Info Card




**Audio network**

**Audio Processing Technology NXL384:**

a cost-effective solution to audio communications across permanent digital networks; offers standard features such as auxillary data, alarm functions and integral back-up circuitry to assure the broadcast of program continuity.

+44 1232 371110; fax: +44(0)1232 371137;  
www.aptx.com

Booth: R 2390 Circle (268) on Free Info Card

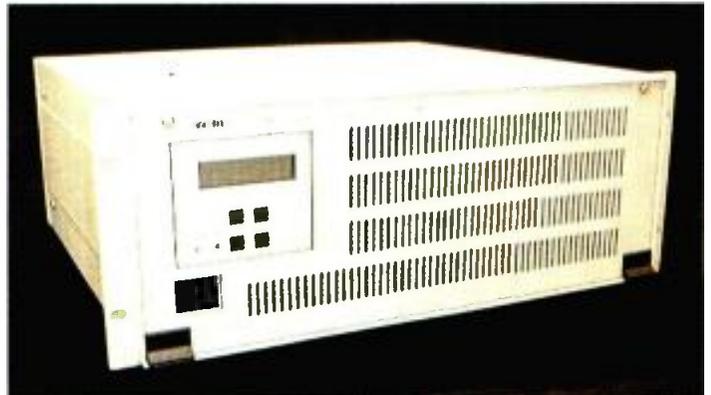

**HD format converter**

**YEM HFC-292M:**

handles every signal in conformity with SMPTE 292; automatically responds to vertical frequency of 60Hz and 59.94Hz; motion adaptable line scanning interpolation method increases vertical resolution of images.

310-544-9343; fax: 310-544-9363; www.yem.com

Booth: L 3117 Circle (270) on Free Info Card



**Dual audio embedder/de-embedder**

**Crystal Vision TANDEM**

features two removable piggyback units on one card; can be configured to any two of four possible functions at once — embedding analog or digital audio into SDI or de-embedding analog or digital audio from SDI; can be a single embedder, a single de-embedder, a dual embedder, a dual de-embedder or a mixed embedder/de-embedder; the kit format means that the customer can build the exact product required and can reconfigure it in the field.

+44 1223 506 515; fax: +44 1223 506 514;  
www.crystalvis.com

Booth: L 9525 Circle (303) on Free Info Card



# US UTAH SCIENTIFIC

## We're Back, Better Than Ever

What's in a name? Quite a lot when the name is Utah Scientific.

That's right, we're back... with the same quality products,  
the same expert customer service and the people who  
started the Utah legacy more than 20 years ago.

Call us to discuss your system requirements:  
801 524 9999 or [www.utahscientific.com](http://www.utahscientific.com)

*See us at NAB Booth #L2027*

Circle 162 on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)



**MPEG-2 TS Analyzer**  
**Astro Systems TS-7801:**

this real time signal analyzer works with the MPEG-2 Transport Stream, providing fundamental analyzing functions such as TS bit rate analysis; PID analysis and PTS/DTS analysis; its input interface is ATSC/DVB ASI/SPI and a loop out equipped; this analyzer monitors the TS/PSI SI/PES/ES components of MPEG2 data streams, and errors are displayed in real time

818-244-1806; fax: 818-244-1878;  
 www.astro-systems.com

Booth: S 3877 Circle (320) on Free Info Card

**Archive server**

**Pluto Technologies AirCHIVE:**

solution that expands server media storage time much as does a data tape library system

303-402-9000; fax: 303-541-9043; www.plutotech.com

Booth: L 1516 Circle (329) on Free Info Card

**2D production software**

**Cambridge Animation Systems Animo 3:**

includes a 3D structure embedded within the current 2D toolset; acts as a harness for the Cas family of products and other software products; 2D/3D can be integrated via the Scene III plug-in.

+44 1223 578 100; fax: +44 1223 578 101;  
 www.cam-ani.co.uk

Booth: S4121 Circle (313) on Free Info Card

**MPEG-2 real-time monitor**

**Rohde & Schwarz DVRM:**

monitors either DVB or ATSC transport streams; errors are documented in detail and in different ways, alarm lines are freely configurable; reliability is provided by employing a non-PC-based platform.

+49-89-41292931; fax: +49-89-41291211; www.rsd.de

Booth: L 4758 Circle (314) on Free Info Card

**THE EQUIPMENT LIQUIDATION CHANNEL**

**BUY**

**SELL**



**The Leading Marketplace for Professional Technology Tools**

- 100% Satisfaction Guaranteed
- Secure Transactions
- Automatic Payment Escrow
- Over 20 years of Pro Experience
- Consignment or Buyout

**See us at NAB, booth MI933**

**digibid.com**  
 Auction Network

an IndustryClick solution

www.digibid.com

e-mail your list to liquidation@digibid.com  
 or call 1.800.423.5499

Broadcast / Film / Pro Audio / Video / Lighting / DJ

Circle (163) on Free Info Card

# THE AZDEN 400UDR BROADCAST UHF WITH ALL THE OPTIONS!

- 63 User-selectable Frequencies (794-806Mhz)
- Crystal-controlled and PLL-Synthesized
- Tone code squelch
- Dual antennas with BNC connectors
- XLR output with volume control
- Headphone Output with volume control
- Operates on 4 AA or 12V DC
- LED indicators for A or B antenna status, AF peak, Power On/Reception status



**41XT** Plug-in transmitter to use with your favorite low impedance wired microphone.



**41BT** Available with omni (EX-503H), uni-directional (EX-503UH) or SCNY ECM-44H.



**41HT** Uni-directional handheld. Also available with AUDIX OM-3 capsule.

The AZDEN logo, featuring a stylized 'A' with a triangle inside, followed by the word 'AZDEN' in a bold, sans-serif font.

**400UDR**


UHF TRUE DIVERSITY RECEIVER

The AZDEN logo, featuring a stylized 'A' with a triangle inside, followed by the word 'AZDEN' in a bold, sans-serif font.

147 New Hyde Park Road, Franklin Square, NY 11010  
(516) 328-7500 • FAX (516) 328-7506  
E-Mail - AZDENUS@AOL.COM  
Azden Home Page: [www.azdencorp.com](http://www.azdencorp.com)

See us at NAB Booth #R2666

Circle (164) on Free Info Card

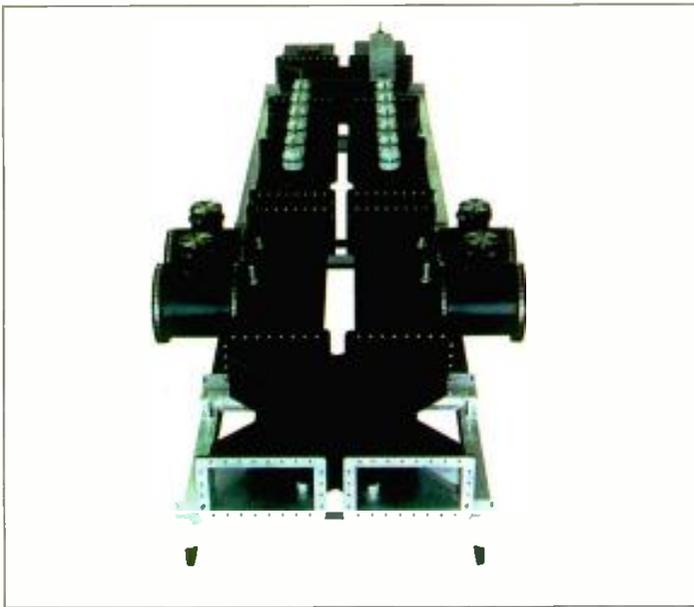

**UHF channel combiner**  
**Micro Communications High power N+1 channel combiner:**

a high-power channel combiner for NTSC and DTV to work with allocation of DTV channel one above the NTSC channel; handles up to 240kW NTSC and 75kW DTV total power; serves as DTV mask filter; features thermally stable filter design — give constant load.

800-545-0608; 603-624-4351; fax: 603-624-4822;  
[www.mcibroadcast.com](http://www.mcibroadcast.com)

Booth: L10374 Circle (299) on Free Info Card

**ENG/SNG vehicle**

**Harris Reporter TX2:**

a combination ENG/SNG vehicle, equipped with both microwave and satellite communications system, offers unlimited coverage area and increased flexibility for small-, mid and large-sized markets.

800-622-0022; 513-459-3400; fax: 513-459-3890;  
[www.harris.com](http://www.harris.com)

Booth: L 6524 Circle (322) on Free Info Card

**RF test equipment**

**Z Technology DM-1000/2000:**

provides RF channel coverage for both 8VSB and COFDM standards. Provides signal metrics including tap values, signal/noise and segment-error-rate; accessible from front panel or serial port.

503-614-9800; fax: 503-614-9898;  
[www.ztechnology.com](http://www.ztechnology.com)

Booth: L 2606 Circle (323) on Free Info Card

**Audio processing system**

**TC Electronic System 6000:**

targeted specifically towards music, film/post-production, broadcast and mastering applications in surround environments; its algorithms include the industry standard VSS reverb technology in a newly developed multichannel version called VSS-5.1; VSS-5.1 is a multi-

source input to multichannel output space simulator that incorporates advanced positioning generators and five totally uncorrelated reverb diffused fields.

805-373-1828; fax: 805-379-2648; [www.tcelectronic.com](http://www.tcelectronic.com)

Booth: R 1059  
 Circle (307) on Free Info Card

**BROADCAST TOWERS**  
 Guyed Towers & Self-Supporting Towers

AM Towers  
 FM Towers  
 TV Towers

**Sabre**  
 Communications Corporation

"Built to a Higher Standard"

Sabre Communications Corporation • 2101 Murray Street • P.O. Box 658 • Sioux City, IA 51102  
 Phone (712)258-6690 • Fax (712)258-8250 • [www.sabrecom.com](http://www.sabrecom.com)  
 1-800-369-6690

Circle (166) on Free Info Card

**Digital linear keyer**


**Crystal Vision LKEY211:**

allows the fitting of six keyers into 1U; it is multi-functional and combines excellent additive and multiplicative keying quality due to 12-bit internal processing with additional operation modes; among these modes are self fill key, internal wipe, mask generation, mix and fade to black; the modes can be activated either manually or automatically.

+44 1223 506 515; fax: +44 1223 506 514;

[www.crystalvis.com](http://www.crystalvis.com)

Booth: L9525  
 Circle (311) on Free Info Card

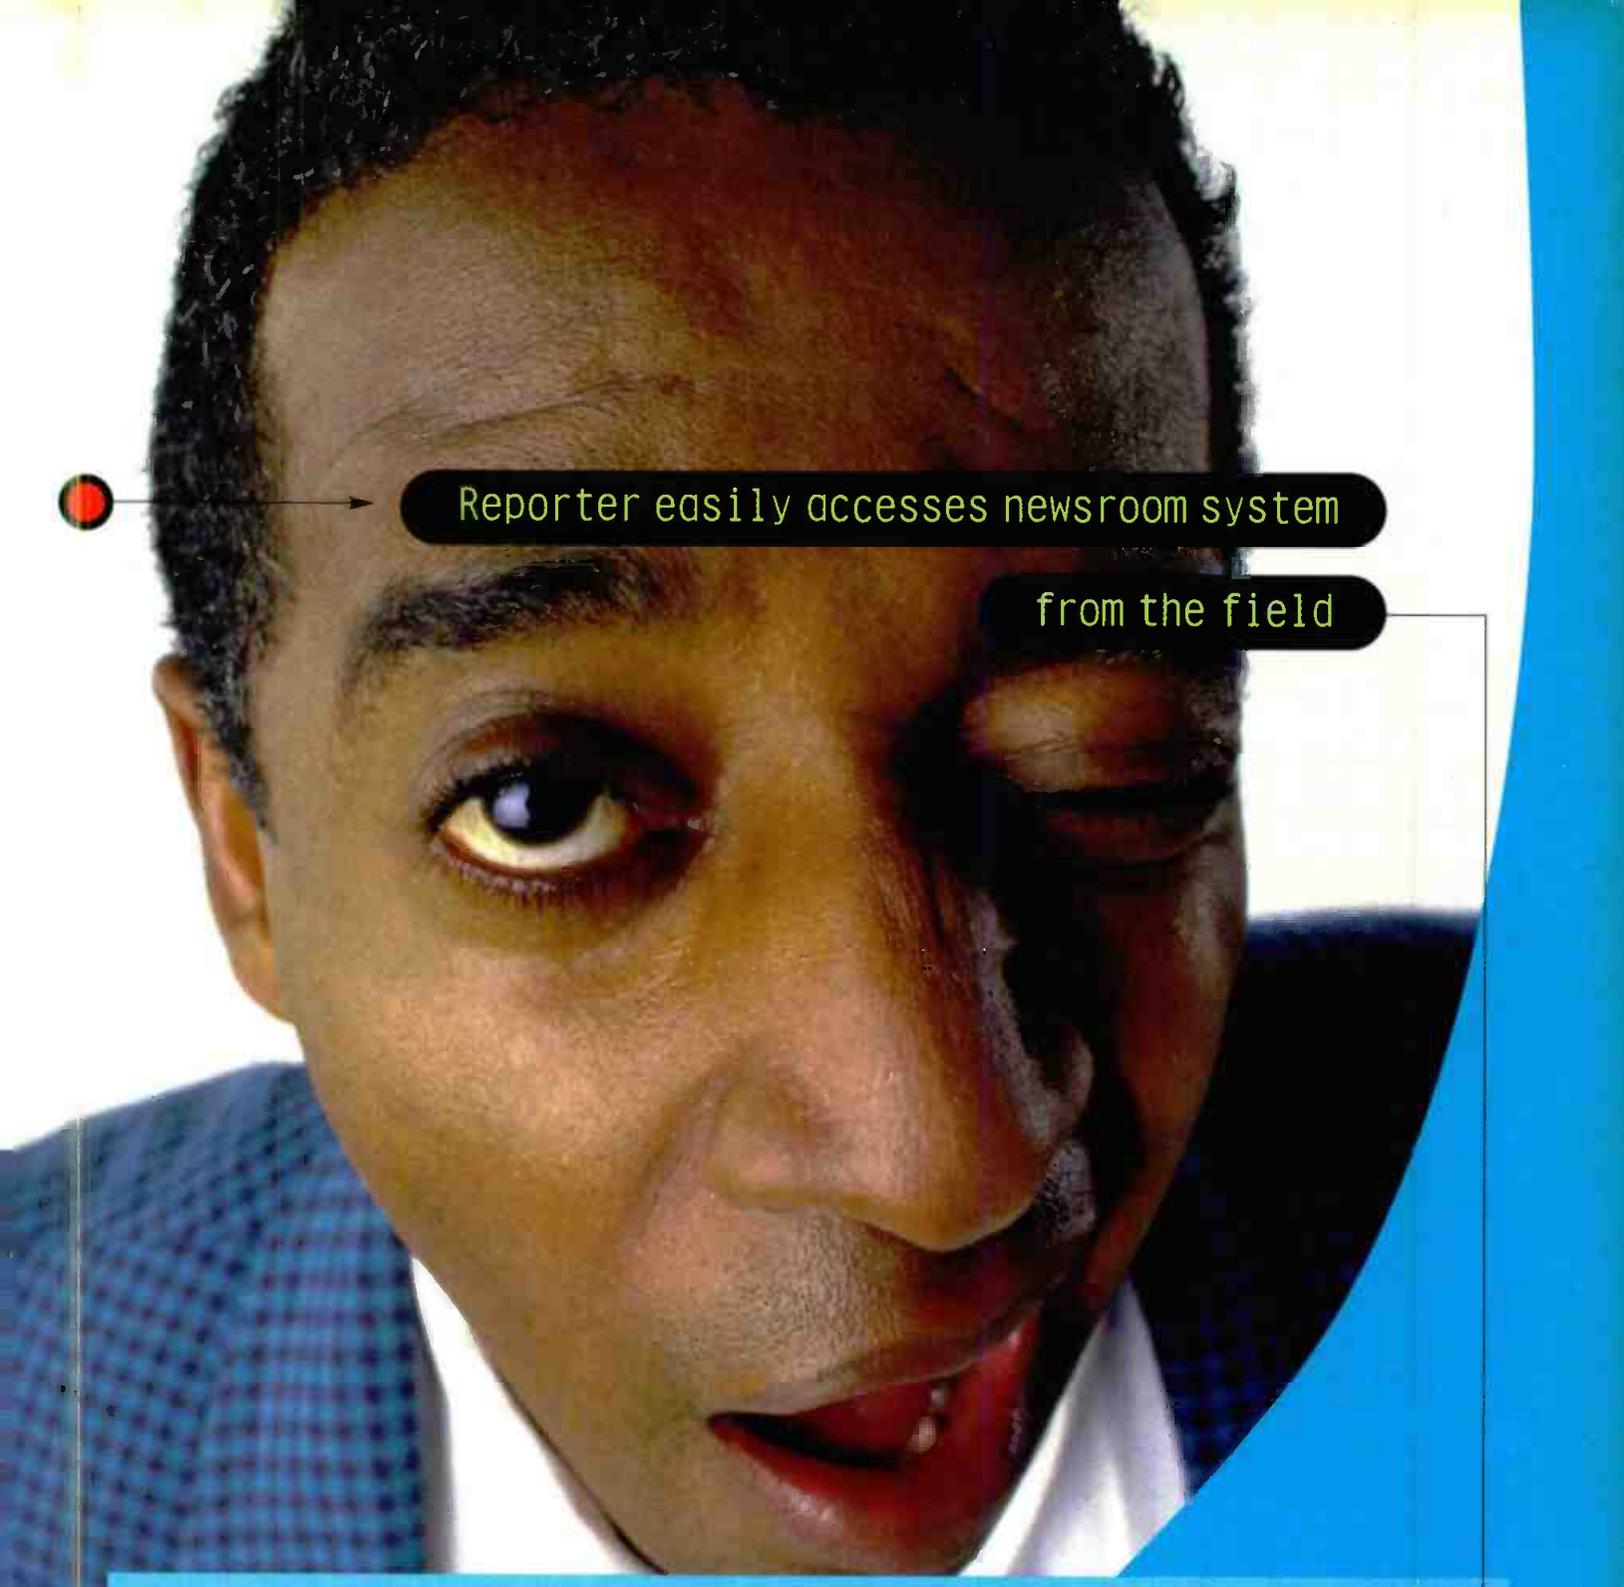

Reporter easily accesses newsroom system

from the field

Well, soon you will.

Because A.N.N Systems is here. With Java-based newsroom client software that allows field reporters to easily access all newsroom resources via the Internet. New digital and Internet solutions designed to merge seamlessly with your current broadcast operation. Part of a truly integrated news gathering system. **Open. Compatible. Proven** in the most demanding newsrooms in the world. Come see how easy it is to make it part of yours. Visit us at NAB booth #L7551.



Advanced News Networking

We'll take you there,™

Circle (167) on Free Info Card

www.ann.com tel: +1 858 674 5235 ©2000 A.N.N Systems  
www.americanradiohistory.com



**Nonlinear editor accessory  
United Media On-Line Express NLE Jog Shuttle  
Knob:**

is an optional item for the online Express family of Realtime Nonlinear Editing Software; it offers direct control of various professional input devices for digitizing, allowing users to select edit in and edit out points of scenes and work in direct relationship with the timeline while editing.

714-777-4510; fax: 714-777-2434;  
www.unitedmediainc.com

Booth: L 9731 Circle (339) on Free Info Card

**Digital and analog transmitters  
Technosystem UHF Band IV/V Solid State  
analog and digital TV transmitters:**

for digital broadcasting, these transmitters are compliant with ITU DVB-T and ATSC DTV standards and feature automatic input bit-rate adaptation, front panel and remote controls, and serial and parallel inputs in single and multi-frequency networks versions; for analog broadcasting, they feature common amplification and all color standards, as well as a built-in precision offset circuit; maintenance is facilitated by easy tube replacement and cavity tuning; +39 06 225871; fax: +39 06 2282355; www.technosystem.it

+39 06 225871; fax: +39 06  
2282355;

www.technosystem.it

Booth: L 2019  
Circle (335) on Free Info Card

**Priced For Your Budget.  
Engineered For Performance.**

**Televator™**



Telemetrics engineered the Televator motorized elevator pedestal with two things in mind. Price and performance. We've set a new standard in affordability. Without any sacrifice in performance. It's what you would expect from the leader in camera robotics technology.

The Televator is easily operated with Telemetrics' CP-RMQ-3A remote controller (optional). It's ideal for any broadcast and production studio application. And because it's so compact, the Televator is also perfect for sports facilities and ENG/OB production vans. Give your production capabilities a lift -- with the Televator from Telemetrics.

**Telemetrics Inc.**  
CAMERA ROBOTICS SYSTEMS

6 Leighton Place, Mahwah, NJ 07430 U.S.A.  
201-848-9818 • Fax 201-848-9819

www.telemetricsinc.com

\* Camera, controller, pan/tilt and accessories not included.

Circle (169) on Free Info Card

**Real-time video  
editing software  
United Media On-Line  
Express LE 2.5:**

provides 550Kb per frame video quality and supports Matrox DigiSuite LE board (NTSC or PAL); it also allows for the complete creation of high-quality video and audio content, with multi-format input and output of component, composite and YC video formats for editing and effects in real time; it has new enhanced speed and performance, as well as enhanced scene trimming and playback; it is available as an upgrade to On-Line Express LE or as a new purchase.

714-777-4510;  
fax: 714-777-2434;  
www.unitedmediainc.com

Booth: L 9731  
Circle (338) on Free Info Card


**Camera crane  
Equipment Javelin MKII  
Crane:**

offers a steady shot up to 40-foot high; lightweight and easy to transport; designed for use with TV or film cameras in combination with remotely controlled camera heads.

818-787-6195;  
fax: 818-787-6195;

Booth: L10686  
Circle (333) on Free Info Card

# Experience Total Rejection

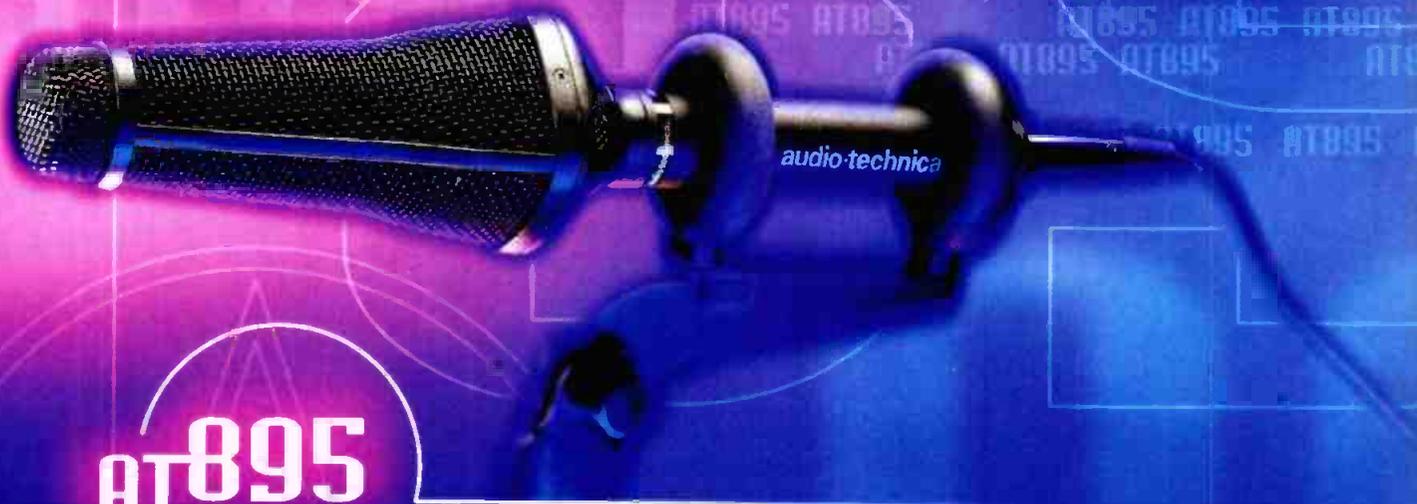

**AT895**

## Adaptive-array Microphone System

Most people don't like rejection.

But if you're a sound engineer

in a challenging audio

environment, off-axis rejection

is exactly what you need.

Enter the AT895 Adaptive-array

Microphone System.

Utilizing Audio-Technica's proprietary DeltaBeam™ technology, the AT895 System manipulates the amplitude and phase of its 5-element array by acoustical, analog and digital means, providing off-axis cancellation of up to 80 dB. The system continuously adapts to a changing soundscape, and is especially effective at suppressing wind noise, rumble and other unwanted low-frequency information. So you get the audio you want, without all the clutter.

Want more information on the amazing capabilities of the AT895? Call, write or fax today. Or check it out on the Web at [www.audio-technica.com](http://www.audio-technica.com). After all, if you're like most audio professionals, you could probably use a little more rejection in your life.



**audio-technica.**

Audio-Technica U.S., Inc.

1221 Commerce Drive, Stow, Ohio 44224

330/686-2600 Fax: 330/686-0719

E-mail: [pro@atus.com](mailto:pro@atus.com) [www.audio-technica.com](http://www.audio-technica.com)



## 160-200MHz high resolution fiber link

### Opticomm RGB-9100:

an amplitude modulated, LED or laser-based RGB or monochrome compatible video transmission system; designed for the extension of any high-resolution video signal such as CAD/CAM graphic workstation; units come with a built-in automatic gain control to maintain video output for each color; units transmit over three multi-mode fibers at 865nm and 1310nm or single mode fibers at 1310nm and 1550nm.

800-8-OPTICOMM; 858-450-0143; fax: 858-450-0155;  
www.opticomm.com

Booth: I 7424 Circle (266) on Free Info Card

## Colorist control system

### Pandora International Limited Pogle:

switches effortlessly for film, tape or data color correction; offers easily customized user interface; provides control of industry-standard telecine and associated devices; features fully integrated edit controller with support for common tape and disk drives.

+44 1474 561000; fax: +44 1474 566935;  
www.pogle.pandora-int.com

Booth: L 4458 Circle (327) on Free Info Card

## Facility database

### Crispin MediaBase 2000:

full facility database based on Microsoft's SQL server; complete with reports, searches and input screens; user access is available via Internet Explorer.

919-790-8813; fax: 919-845-7766;  
www.crispincorp.com

Booth: L 3507 Circle (345) on Free Info Card

## D-1 output camera adapter

### Hitachi CA-ZD1:

camera adapter that provides D1 output from any Z-3000W camera, a digital 4:3/16:9 switchable camera.

516-921-7200; fax: 516-496-3718; www.hdal.com

Booth: L 7507 Circle (341) on Free Info Card

## Plug-in for DAW

### Kind of Loud Technologies Real Verb 5.1:

a 5.1 surround panner plug-in for Digidesign's Pro Tools; uses sophisticated auralization technology to model physical spaces; can map reverberation spatially for surround mixing; allows users to independently place the direct path, early reflections and lat field reverberation in the sound field.

831-466-3737; fax: 831-466-3775;  
www.kindofloud.com

Booth: R4086 Circle (331) on Free Info Card


## Audio connectors

### ATI DMM100, DMM100-BAT Digital Match-Maker:

accepts serial digital NZR signals, including AES/EBU digital audio, from 110 Ohm balanced XLR input, a 75 Ohm BNC or RCA input or a TOSLINK optical fiber; it provides reshaped outputs to drive all simultaneously, with the inputs and outputs transformer-coupled and floating for maximum isolation and ground loop elimination.

800-959-0307; 215-443-0330; fax: 215-443-0394;  
www.atiguys.com

Booth: L 5211 Circle (332) on Free Info Card

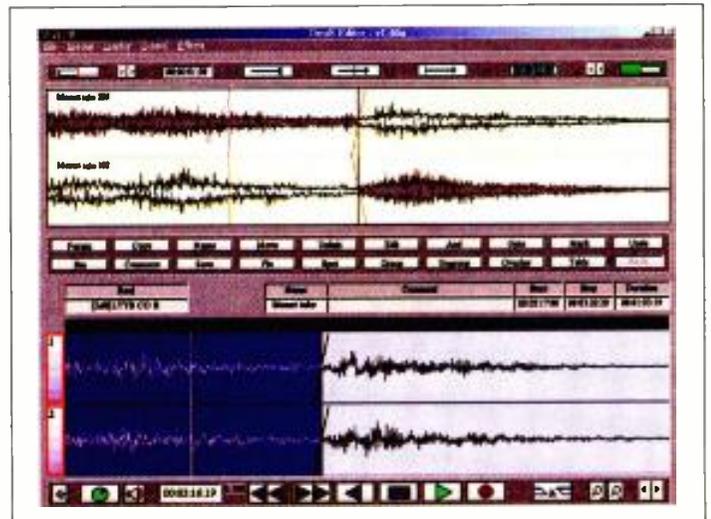

## MPEG-2 interface converters and processors

### Thomcast/Comark Turquoise:

performs multi-interface signal conversion and handles multiple interface standards, including DVB-PI ASI, DVB-PI SPI LVDS & ECL, DVB SSI, SMPTE 310M and M2S; allows for a genlock input signal such as GPS for maximum stability of the output signals; performs transport stream processing with packet format conversion and input/output bit rate adaptation based on stuffing packet and restamping management; succeeds the THOMCAST D6002 family and includes all of the D6002 functions.

413-569-0116; fax: 413-569-0679; thomcastcom.com

Booth: L 9609 Circle (309) on Free Info Card

©2000 Pinnacle Systems, Inc. All trademarks are the property of their respective owners.

# Don't Be An Effects Hog. Just Look Like One.



### PDS 9000 Production Switcher

- Big-station performance on a small-station budget
- 2.5 M/Es, each with three 3D DVEs
- Full RGB and YUV color correction on every key bus
- Up to 19 multi-page framestores
- Fully BroadNet compliant; can exchange files with Lightning, Deko and DVEExtreme
- Easy to use
- Fail-safe reliability

**The PDS 9000. Full Color Correction. 2.5 M/Es. Nine 3D DVEs. Gives Broadcasters Vroom to Grow!**

Born to be wild? Now there's a production switcher with the power to make lesser stations eat your dust. Never have so many effects been so easy to achieve. Designed to transition painlessly from an analog environment to a digital one, the PDS 9000 gives you nine full-function, 10-bit DVEs with full RGB and YUV color correction on every bus, with the flexibility to grow as you go. In fact, it sets a whole new standard for production switchers, at the lowest cost around. Think of it as a road-chewing Hog, on a Moped budget. Get up to speed fast.


Visit our Web site or call 1-800-4PINNACLE.



[www.pinnaclesys.com](http://www.pinnaclesys.com)

**The Choice For Digital Video.™**

Circle (170) on Free Info Card

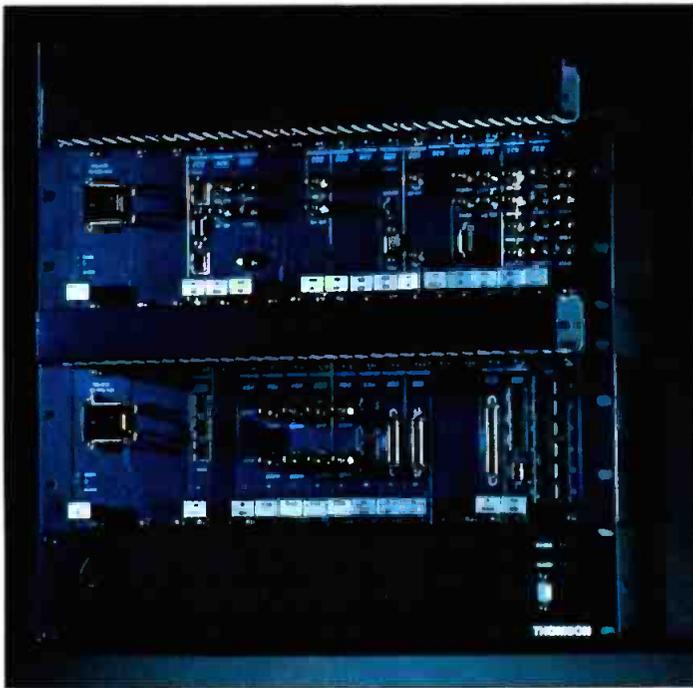

### Telco contribution codec

#### Thomson Broadcast ACM 4200:

allows video trucking on the telecom network; offers broadcasters conveying video or audio signals over a network optimal rendered quality.

800-882-1824; 201-569-1650; fax: 201-569-1511;  
www.thomsonbroad.com

Booth: L 9609 Circle (369) on Free Info Card

### Three CCD camera

#### Hitachi Three CCD color camera:

utilizes 2/3-inch 510,000 pixel CCD; 16:9/4:3 switchable; suited for use as graphics camera, in a pan/tilt system or as a tower camera; has a sensitivity of F1.4 at 0.5 lux and low vertical smear; features an automatic electronic shutter and a continuous wide range of lighting conditions by AES, Auto Iris and AGC; offers a horizontal resolution of 750 TVL; optional features include a remote filter disk and serial digital output.

516-921-7200; fax: 516-496-3718; www.hdal.com

Booth: L 7507 Circle (342) on Free Info Card

### Serial digital video and AES Switcher

#### Multidyne DAS-1000


supports vertical interval switching of one video and up to two AES/EBU audio channels on a 10x1 matrix; includes one video and two audio breakaways; 350 meter cable equalized video inputs and two reclocked video outputs; supports 75-ohm single ended and 110-ohm balanced AES/EBU audio; supports 143-540Mb/s SMPTE 259M serial digital video and complies with SMPTE RP 168 vertical interval switching.

800-4TV-TEST; 516-671-7278; fax: 516-671-3362;  
www.multidyne.com

Booth: L 9144 Circle (393) on Free Info Card

# A Virtual Studio That Reduces Costs?

...It's time to open your mind

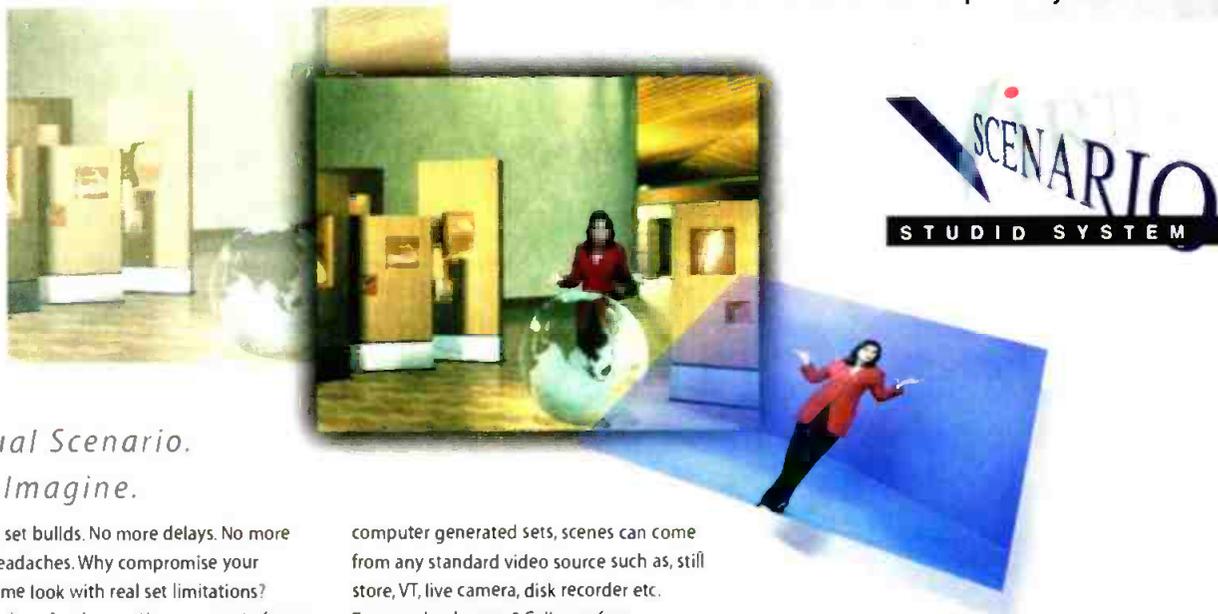

*Virtual Scenario.  
Just Imagine.*

No more set builds. No more delays. No more studio headaches. Why compromise your programme look with real set limitations? Free your imagination *and* keep control of your budget, a powerful combination that only Virtual Scenario can provide.

Virtual Scenario allows cameras to pan, tilt, zoom, and focus with the virtual set always held in perfect perspective. It will not restrict you to

computer generated sets, scenes can come from any standard video source such as, still store, VT, live camera, disk recorder etc.

Too good to be true? Call now for a demonstration tape and see for yourself.

Radamec Inc. 20 North Fourth Avenue  
Highland Park, NJ 08904  
Tel: +1 732 246 0906 Fax: +1 732 448 1184  
Pager: +1 732 748 4881  
e-mail: radamecinc@netscape.net

**RADAMEC**  
BROADCAST SYSTEMS

Circle (171) on Free Info Card See us at NAB Booth #L2616

*Real motion images, not test patterns or flower pots.*

Images that make television the ultimate personal entertainment medium and with Electronic Cinema, those images expand to a whole new experience.

The benchmarks of success today – eyeballs glued to the images from *your* channels or website... or your competitors from across town, or around the globe.



You need to create "The Entertainment Experience."  
Crisp, beautiful pictures are part of that experience  
...so when it comes to your digital images,  
trust the leader in motion video imagery.

***Trust your eyes***

**FAROUDJA LABORATORIES**  
WORLD LEADER IN VIDEO PROCESSORS, UP CONVERTERS, CHIP SOLUTIONS



**FAROUDJA**  
**PICTURE PLUS™**

visit us at [www.faroudja.com](http://www.faroudja.com)



### **MPEG-2 multiplexer**

#### **Thomson Broadcast Broadmux/XNA 4600:**

offers enhanced input capabilities and new features, such as opportunistic data management and internal splicing capabilities between MPEG-2 streams; the internal broadmux splicer can be triggered through in-band commands; the XNA 4600 enhanced the multimedia capacities of the 4600 ATM network interfaces and addresses the needs for transmission of audio-visual services over ATM.

800-882-1824; 201-569-1650; fax: 201-569-1511;  
www.thomsonbroad.com

Booth: L 9609 Circle (368) on Free Info

### **HD graphics camera**

#### **Hitachi DK-H3:**

uses 1080i format, includes a 2.2-million pixel, 2/3 inch CCD chip and 1100 TVL horizontal resolution; offers DSP functions such as six-vector color correction, adjustable detail frequency and flesh-tone detail; built-in functions include color bar and three-wheel filter disc; can be controlled remotely through RC-Z2A port.

516-921-7200; fax: 516-496-3718; www.hdal.com

Booth: L 7507 Circle (340) on Free Info Card



### **Audio synchronizer**

#### **Pixel Instruments AD-3000:**

this audio synchronizer is intended for automatic lip sync correction (with the VS-5200, for example) and general purpose audio delay applications; built-in pitch corrector allows rapid delay change with minimum audible artifacts; includes standard stereo analog, AES/EBU digital (balanced) and SMPTE digital (unbalanced) I/Os.

408-871-1975; fax: 408-871-1976;  
www.pixelinstruments.com

Booth: L 3529 Circle (348) on Free Info Card

### **Studio camera**

#### **Angenieux 20x7.5HD:**

camera lens for studio application; offers extended range and wide-angle capability with minimum ramping; provides distortion-free images with no chromatic aberration for optimal high definition and image clarity.

973-812-3858; fax: 973-812-3858;  
www.angenieux.com

Booth: L11835 Circle (352) on Free Info Card

### **Master control automation**

#### **Crispin RapidPlayX 2000:**

multi-channel playback/record control used for Master Control or News Control; runs on Windows NT; user screen is configurable; offers ability to link up to three channels of playout to a single channel.

919-790-8813; fax: 919-845-7766;  
www.crispincorp.com

Booth: L 3507 Circle (343) on Free Info Card

### **Device controller**

#### **Crispin Crispin Device Server:**

an NT-based PC for controlling serial and LAN controllable devices, such as Master Control switchers, routers, tape machines, video disk servers and character generators; communicates to Crispin applications over LAN via MOS.

919-790-8813; fax: 919-845-7766;  
www.crispincorp.com

Booth: L 3507 Circle (344) on Free Info Card

### **Analog oscilloscopes**

#### **LeCroy LA302/LA303:**

features three channels; LA302 measure 2Hz to 100MHz and LA303 operates up to 200MHz; third channel provides three sensitivity levels for a wider range of measurements; both oscilloscopes feature a frequency response of 2mC/div, DC@50MHz and a sensitivity of 2mV/div; standard triggering includes TV system measurement base on NTSC and PAL SECAM; HD triggering is standard on LA303 and optional on LA302.

201-935-8486; fax: ; www.iwatsu.com

Booth: S 3315 Circle (367) on Free Info Card

### **HDTV stillstore**


#### **Avica Vecta HDTV stillstore:**

this still/clip store supports all digital formats and allows simultaneous viewing of standard and high definition images; there is support available for the new 1080p/24sF image format, and up- and downconversions between all image formats; the stillstore may be used as a stand-alone or networked workstation.

800-706-0077; 818-846-0589; fax: 818-846-0175;  
www.avicatech.com

Booth: S 2856 Circle (445) on Free Info Card

# DTV Transmission So Much Content—So Little Bandwidth

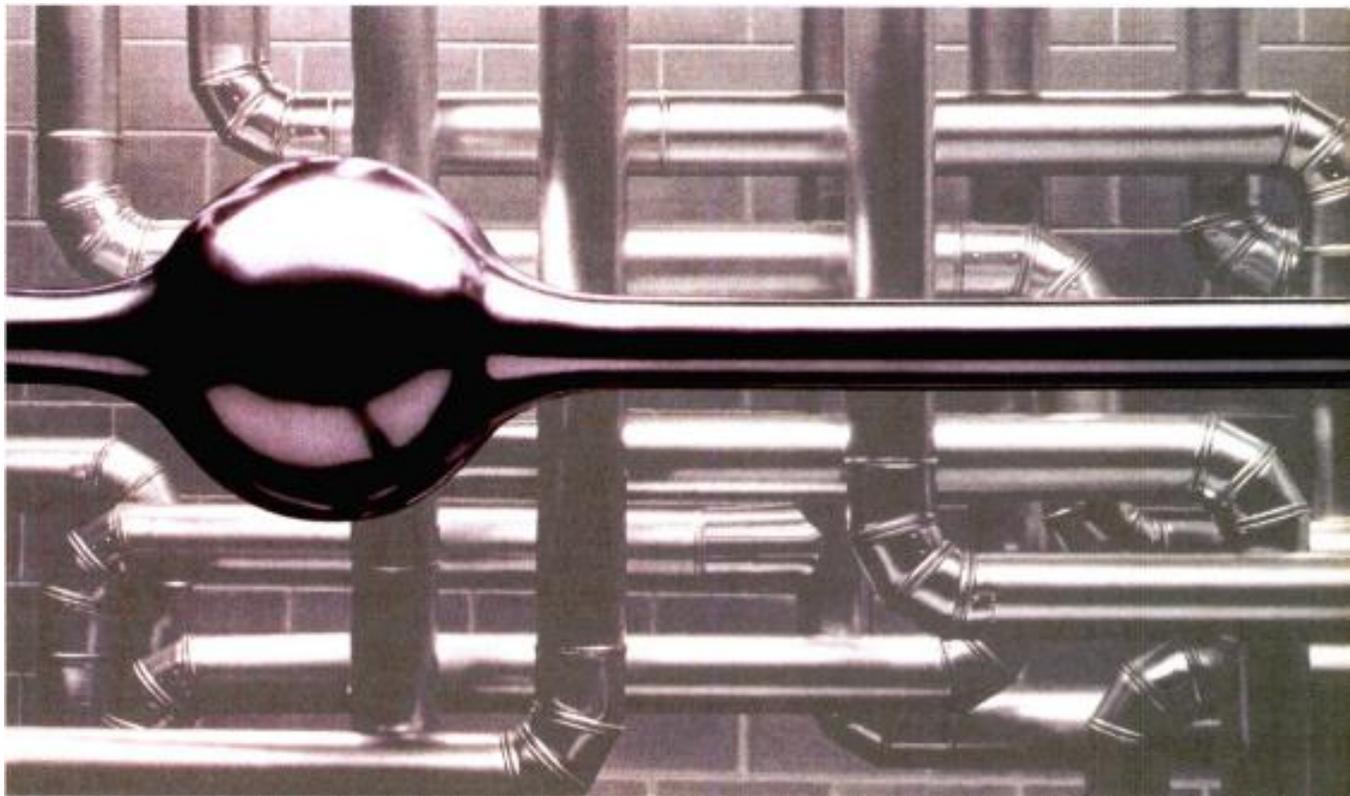

Your allotted DTV bandwidth may look like a big pipe today, but—tomorrow promises greater opportunities

- for more services:
- High Definition Television
  - Multi-channel Standard Definition Television
  - Program Information
  - Datacasting
  - Streaming Video
  - And more...

The DigiCipher® II ATSC compliant encoding system employs sophisticated compression and multiplexing technology to make the most of your bandwidth—while maintaining the highest quality pictures. And it's backed by the resources of an unparalleled technology innovator: General Instrument, now Motorola's Broadband Communications Sector. With nearly a decade of experience in helping customers deliver more digital content



*Motorola's DigiCipher® II HD Encoder.*

in less space, we have the track record and experience to act as your partner throughout the entire digital migration process. When choosing encoding systems for the long term remember...nobody delivers DTV better than Motorola.

Contact us at 800-385-5843 for more information or visit us at [www.motorola.com/broadband](http://www.motorola.com/broadband)



## **SAN-ready Fibre channel RAID system**

### **DataDirect Networks EV-800:**

for use in performance-critical and fault tolerant installations in broadcasting, post production and special effects; delivers high performance to digital content professionals; offers single unit storage capacities ranging from 45GB to 1.2TB; offers fault tolerance, redundant components and a solid migration path to a SAN environment.

800-322-4744; 818-700-7600; fax: 818-700-7601;  
www.datadirectnet.com

Booth: S 3427 Circle (474) on Free Info Card

## **Graphics platform**

### **Pinnacle TARGA 3100:**


provides impeccable quality including true uncompressed video as well as MPEG-2 and DV video processing; supports RGB A format for effects processing and compatibility with video and key provided by animation and compositing applications; new HUB3 100 megapixel per second video processor has a memory centric architecture that enables multilayer editing and compositing in real-time with sub-pixel DVEs, RGB chroma keying and advanced RGB color correction operating simultaneously on multiple layers of video.

650-526-1600; fax: 650-526-1601;

www.pinnaclesys.com

Booth: L 9457

Circle (360) on Free Info Card

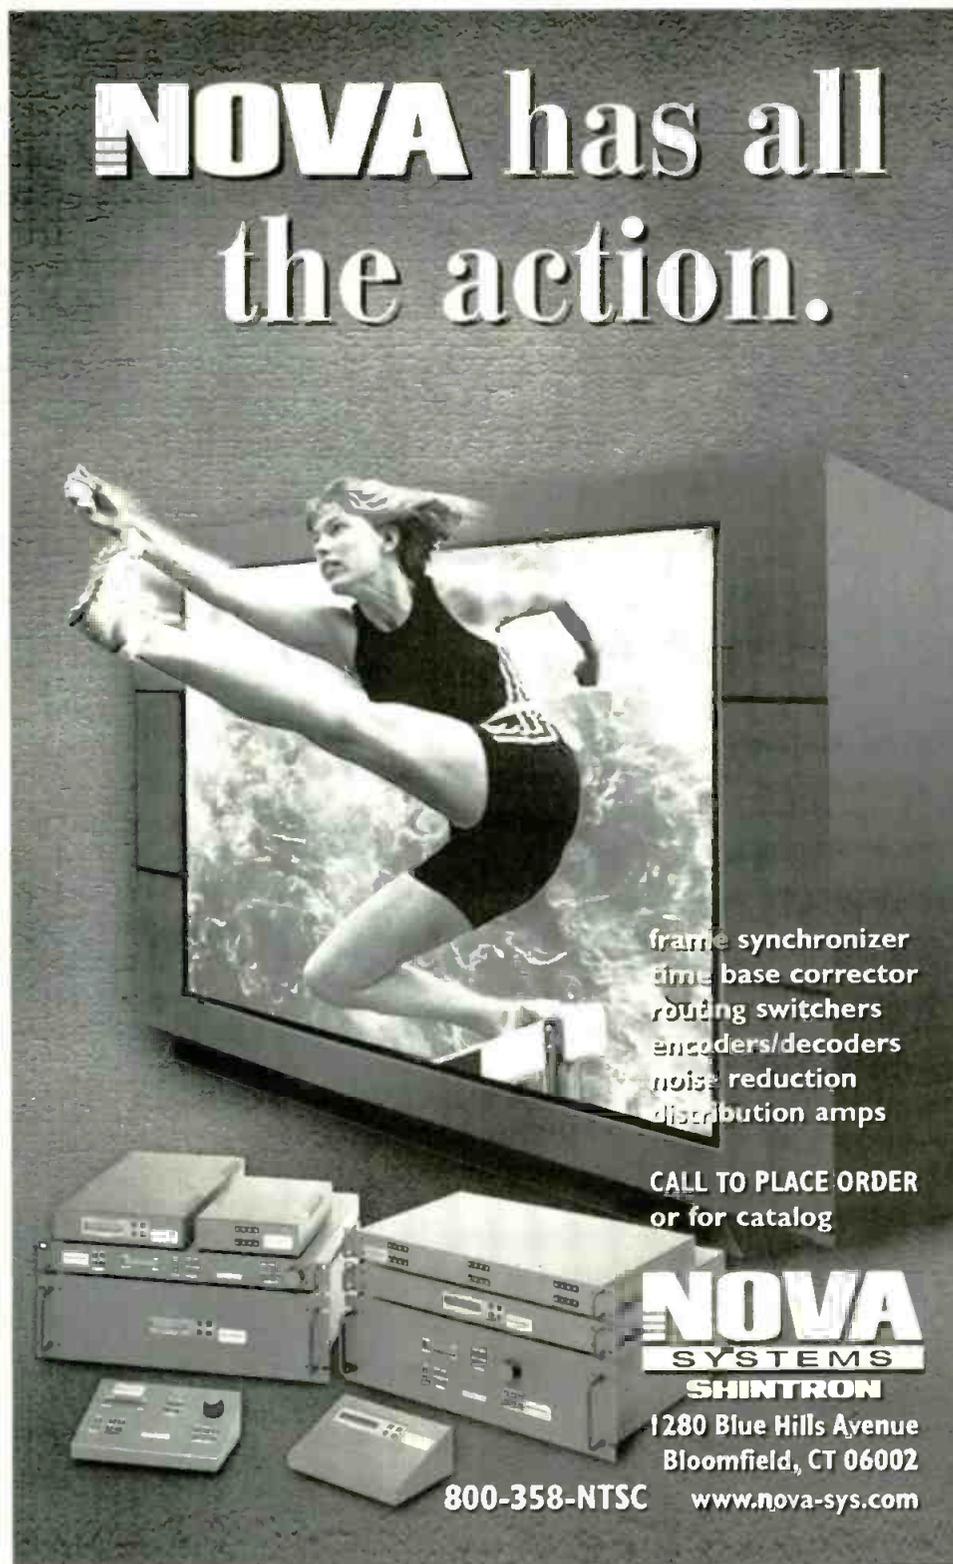

# **NOVA** has all the action.


frame synchronizer  
time base corrector  
routing switchers  
encoders/decoders  
noise reduction  
distribution amps

CALL TO PLACE ORDER  
or for catalog

## **NOVA** SYSTEMS SHINTRON

1280 Blue Hills Avenue  
Bloomfield, CT 06002  
800-358-NTSC www.nova-sys.com

Circle (157) on Free Info Card

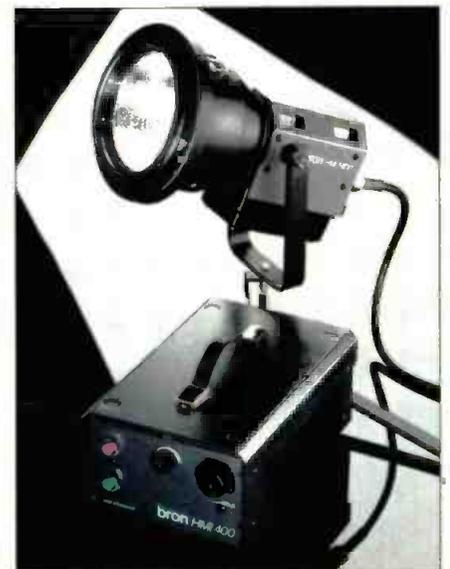

### **HMI lighting system ProSource/BMI Bron HMI400 light:**

400W open-faced lamphead has focusing ratio of 5:1 and is fitted with a highly efficient, hot re-strike-type HMI/MSR bulb; electronic AC ballast is stabilized and allows flicker-free recording regardless of frame restore or shutter speed.

203-335-2000; fax: 203-335-3005;

Booth: L11878

Circle (302) on Free Info Card

### **Linux-based MPEG encoder**

#### **Zapex Technologies LX-3000:**

a Linux-based MPEG-2 encoding board with video and Dolby digital audio for digital broadcast, cable and video on demand an satellite applications.

650-930-1300; fax: 650-930-1399;

www.zapex.net


Booth: M7962

Circle (374) on Free Info Card

# DTV. Time waits for no man... neither does the FCC.

**W**ith so many decisions to make in the fast approaching conversion to DTV, you need to begin the process early. By starting now, you assure your station a seamless transition with custom-engineered choices. Our design engineers are ready to create the Antenna System<sup>™</sup> that works specifically for your unique situation. Let's get started!

1-800-341-9678 • email: dcsales@dielectric.com • www.dielectric.com  
Dielectric Communications • 22 Tower Road • Raymond, Maine 04071

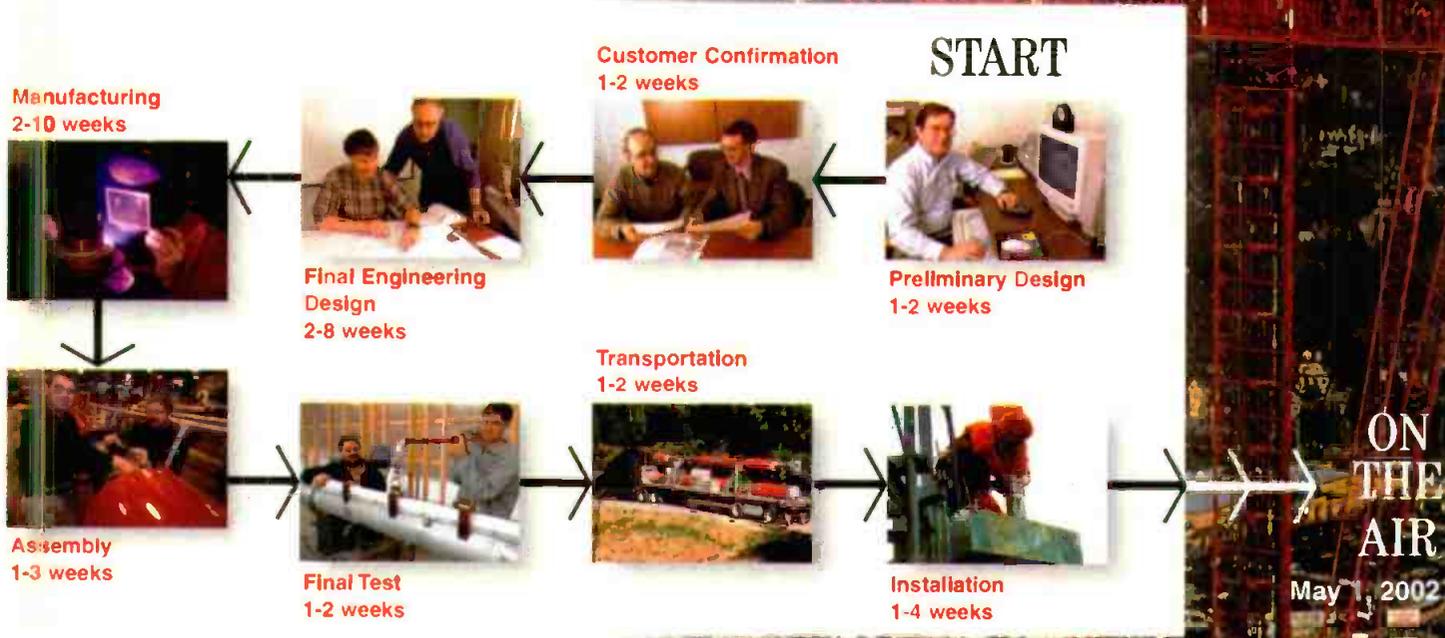

**Note:** In the first two years of the digital television changeover, 115 stations went on air with DTV. In the next three years, the remaining 1,485 must be on air.

See us at NAB Booth# L8205

**Dielectric**  
COMMUNICATIONS  
Engineering Excellence Since 1942

1959: Baltimore, Maryland.  
First triple antenna  
candelabra built.

1999: Nine new Dielectric  
antennas top this  
historic tower.

Start the process now. Call 800-341-9678.



### Logo generator

#### Video Data Systems LogoStar:

offers a simple and cost-effective means of keying over incoming video, storing and scheduling logos on screen; stores bitmap images and is ideal for on-air slides, channel identification, or auto display of emergency messages; features 32-key levels per logo, downstream keyer or upstream sources and preview output plus on-air output with enable control.

800-858-5850; 516-231-4400; fax: 516-231-4405;  
www.videodatasys.com

Booth: I 6142 Circle (256) on Free Info Card

### HD production switcher

#### Philips HD35:

designed for high-end live and post production; a format-selectable 1.5Gb/s switcher that features up to four M/E banks and 90 inputs; designed for configuration flexibility, network and performance.

800-962-4287; 818-729-7700; fax: 818-729-7710;  
www.broadcast.philips.com

Booth: L 6910 Circle (379) on Free Info Card



### Film and video restoration system

#### Snell & Wilcox Archangel:

provides fast and effective detection of impairments and estimation of quality; provides one-pass automatic restoration and user intervention of critical material.

+44 1730 821 188; fax: +44 1730 821 199;  
www.snellwilcox.com

Booth: L11039 Circle (376) on Free Info Card

### Widescreen display processor

#### Snell & Wilcox ARC 225:

new addition to ARC range; a cost-effective aspect ratio converter unit for playout centers within terrestrial and digital broadcasting environments.

+44 1730 821 188; fax: +44 1730 821 199;  
www.snellwilcox.com

Booth: L11039 Circle (377) on Free Info Card


### WAN routing switcher

#### Philips NetCaptain:

extends functionality of Jupiter and Vulcan routing control switchers to support Web-based applications and centralized control over WANs; provides control and monitoring for companies that offers video transport services; provides software to manage, control and view broadcast content from remote locations.

800-962-4287; 818-729-7700; fax: 818-729-7710;  
www.broadcast.philips.com

Booth: L 6910 Circle (380) on Free Info Card

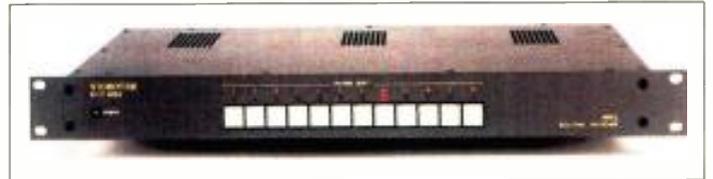

### MPEG-encoded video routing switcher

#### Videotek RS-12MPEG:

switches MPEG-2 encoded serial digital signals with data rates from 19.4Mb/s to 360Mb/s; also compatible with DVB-ASI signals and uses the same control protocol as any RS-12 series router; features 12 looping data inputs, dual data outputs and serial communications control standard.

800-800-5719; 610-327-2292; fax: 610-327-9295;  
www.videotek.com

Booth: L12924 Circle (391) on Free Info Card

### Digital audio metering system

#### Wohler Dolby Digital AC-3 level metering system:

a compact 1RU metering unit with an internal Dolby Digital decoder and six 106 segment tri-color, high-resolution LED level meters.

888-5 WOHLER; 650-589-5676; fax: 650-589-1355;  
www.wohler.com

Booth: L 6761 Circle (362) on Free Info Card

### Matte box

#### ProSource/ BMI Shade FX:

features two independently rotating filter compartments; also incorporates a fixed matte within its hoods and lightweight carbon fiber filter frames; can be used with all broadcast and industrial internal focus lenses in both 4:3 and 16:9 down to 5.0mm. Optional rail adapter and universal lightweight support are available for external focus lenses.



203-335-2000; fax: 203-335-3005;

Booth: L11878 Circle (269) on Free Info Card


# MEET THE BEST DIGITAL AUDIO MULTITRACK MASTER RECORDER MADE.

*360 Systems*

360 Systems designed the TCR8 with one goal in mind: To deliver a Master Recorder that faithfully captures the results of your work.

### The Difference is in the Details

To provide the level of sonic accuracy that critical projects demand, you have to sweat the details. TCR's design specifies gold XLR connectors, metal film resistors, no capacitors in the audio path, and a patented low-noise circuit to suppress RF, hum and cable noise. Put all of this on shielded PC boards with double-regulated power, and the result is a 24-bit audio recorder of unprecedented quality.



### Defining the Master Recorder

The TCR8 Master Recorder includes the tools you'll need for professional work—solid synchronization, the right connectors, and a feature-set focused on commercial audio production.

Today's high-resolution audio formats need a new generation of recorders that deliver on the promise of 24-bit audio. By actual measurement, the TCR8 Master Recorder far exceeds the specs of competitive machines, and actually approaches the limit of today's art.

Today's "24/7" studio makes very real demands on audio equipment. Which is why 360 Systems designs for reliability, just as we design for audio quality. But then, we also have 30 years experience building equipment for round-the-clock professionals.

From original recording to final mixdown, the new TCR8 Master Recorder delivers performance without compromise. Should you expect anything less?

### Superior Audio Quality

- Measurable improvement of 20-dB in SNR and dynamic range over conventional designs
- Bit-for-bit™ reproduction of 24-bit PCM, Dolby®-E and AC-3 recordings
- Record across all tracks, at any sample rate
- Workstation file interchange with SD-II and WAV files
- Complete Cut-Copy-Insert-Erase editing features
- The best digital scrub editing on the market
- Time offsets, track slip, varispeed and audio delays
- Up to 24-hours of recording time in a single file

### Standard Equipment

- DVD-RAM drive for 10 hours of 24-bit audio on low-cost disks
- Internal 9GB SCSI hard disk (up to 50 GB available)
- 250 MB Zip® drive
- A complete set of XLRs for analog and AES/EBU
- Rear panel SCSI port for external drives
- Large display for full length file names
- Multi-machine sync provides up to 64 tracks
- Flex-Format™ drive bay for removable media, such as DVD-RAM (standard), Magneto Optical or removable hard disks
- Complete SMPTE time code features:
  - > Support for all frame rates
  - > VTR emulation with P2 control
  - > Reads LTC or VITC
  - > Hard lock to Digital Betacam® for tight sync during scrub-edits
  - > Reference to Video, AES, Word Clock, or LTC
- **\$5,995 complete**



There is a difference. Click on [www.360systems.com](http://www.360systems.com) for a 20-dB improvement in *your* next project.

*360 Systems*

*The pros know the difference.*

**Visit us at NAB Booth #R3163**

Circle (178) on Free Info Card

5321 Sterling Center Drive, Westlake Village CA 91361  
Tel (818) 991-0360 Fax (818) 991-1360 E-mail: [sales@360systems.com](mailto:sales@360systems.com)



## Zoom and focus control

### ProSource/BMI ZiF100:

ergonomic design and 24-bit DSP electronics allow zoom/iris and zoom/focus control with one hand; standard functions such as VTR start/stop, return video, zoom/focus direction and speed adjustment are built into the controller.



203-335-2000; fax: 203-335-3005;  
Booth: L11878 Circle (301) on Free Info Card

## Serial digital video distribution amplifier

### Burst Electronics DVA-2:

is three products in one: a reclocking serial digital video distribution amplifier with 2 outputs; a serial digital to analog composite converter, and an error code analyzer allowing one to observe the quality of digital video in order to correct problems.

505-898-1455; fax: 505-898-0159;  
www.burstelectronics.com  
Booth: L 9975 Circle (359) on Free Info Card

## HD digital disk recorder

### Accom WSD/HD Digital Disk Recorder:

incorporates significant advances in storage and disk control technology; designed for electronic film, graphics/effects and editing application in a network, multi-user, multiformat environment; can record/play SD/60i digital as well as HD formats, including 24p, on a clip-by-clip basis; provides flexibility for work at any resolution.

650-328-3818; fax: 650-327-2511; www.accom.com  
Booth: S 4909 Circle (364) on Free Info Card

## HD downconverter

### Snell & Wilcox HD 9000D:

a production tool designed to enable HDTV program makers to originate and archive material in HDTV while simultaneously delivering studio quality masters for immediate distribution.

+44 1730 821 188; fax: +44 1730 821 199;  
www.snellwilcox.com

Booth: L11039 Circle (378) on Free Info Card

## 60kW IOT

### Litton Electron Devices L4482:

features peak sync output (vision only) 64kW; common mode peak sync output power of 44kW visual/4.4 kW; and peak output power digital operation of 85kW.

800-861-1UHF; 570-326-3561; fax: 570-326-2903;  
www.littonedd.com

Booth: T 2238, L 5927 Circle (426) on Free Info Card

## Solid-state DTV transmitter

### ITELCO WV Series:

a liquid-cooled solid state transmitter; features an exclusive Itelco developed 8VSB exciter/modulator and patented liquid cold solid-state amplifier modules; available for power levels between 800W rms and 40kW rms.

303-464-8000; fax: 303-464-8770; www.itelco-usa.com

Booth: L 3243 Circle (361) on Free Info Card

## Third generation IRD

### Tadiran Scopus Codico IRD 2600:

offers enhanced capabilities at head-end site; based on new advanced chipset and included Dolby AC-3 support, simultaneous decoding and Program IDs, ATM DS-3 interface and advanced VBI over SDI; offers a modular structure and a variety of interfaces for various applications.

858-618-1600; fax: 858-618-1615;  
www.scopususa.com

Booth: M10135 Circle (363) on Free Info Card

## Asset management system browser

### Grass Valley Group ContentShare Explorer 1.0:

browser-like application for networked media asset management; leverages Internet-based technologies of ContentShare platform for media access provides multiple views and dynamic discovery of assets; metadata display and modification tools.

800-998-3588; 800-547-8949; fax: 503-627-7275;  
www.grassvalleygroup.com

Booth: L11018 Circle (366) on Free Info Card



## MPEG-1/MPEG-2 streaming server

### Darim Vision MxTV:

this integrated MPEG-1/MPEG-2 streaming server transmits up to 4 live channels and supports scheduled broadcasts for pre-recorded files and on-demand requests for remote sites; it can also be used to create full-screen/full-motion video conferencing.

888-GET-MPEG; 213-637-1700; fax: 213-637-1705;

Booth: M10167 Circle (488) on Free Info Card

# ultimatte 9



The new Ultimatte 9 and Ultimatte 400 are part of the third generation of Ultimatte's all digital compositing devices. They feature the Emmy and Oscar winning technology that has gained Ultimatte Corp. a reputation for the best blue- and green-screen compositing in the world. Both are fully linear matting systems, producing totally realistic composites even when the foreground contains smoke, shadows, soft edges, and other translucent and transparent qualities.

#### PROGRAMMABLE REMOTE CONTROLS

Both the Ultimatte 9 and the Ultimatte 400 feature advanced remote controls which can control up to 4 Ultimatte main units. "On Air" tally lights, reduced menu layers and programmable menus give you easy access and control.

#### ULTIMATTE 400

The new, low cost all-digital compositing hardware featuring matte controls, foreground & background colorizing controls, internal windowing controls, programmable remote, and non-volatile memory.

# ultimatte 400



Specifically designed for virtual studio applications, the Ultimatte 9 offers features that produce a polished virtual production where visual improvements can be seen on the screen while bottom line production costs are reduced.

#### DEPTH OF FIELD with BACKGROUND DE-FOCUS

Automatic background defocusing that requires no software programming or physical hookup to the camera or computer.

#### AMBIANCE and COLOR CONFORMANCE

Analyzes the background and automatically adjusts the foreground color in real-time.

#### EDGE CONTROL with AdvantEdge

Produces a flawless edge and can be used alone or in conjunction with sub-pixel matte sizing and positioning controls.

#### OVER-EXPOSURE CONTROL

Corrects problems with over exposed blue screens with no loss in detail.

#### EIGHT INPUT ROUTER

Configurable so that any of the inputs can be used for Foreground, Background or Matte signals, providing enhanced versatility.

20554 Plummer Street  
Chatsworth, CA 91311  
USA  
Ph: +1.818.993.8007  
Fax: +1.818.993.3762

Ultimatte Europe  
Zijdstraat 72  
1431 EE Aalsmeer  
The Netherlands  
Ph: +31.297.380.935  
Fax: +31.297.380.939

E-Mail:  
sales@ultimatte.com

# ultimatte

www.ultimatte.com

See us at NAB Booth #19774

www.americanradiohistory.com

Circle 181 on Free Info Card

## Computer chassis/server

### Crystal Group CS600:

a 2U high by 19" rackmount computer chassis; features a six-slot ISA/PCI PICMG



2.0 compliant passive backplane with a butterfly backplane design; powered by wither 100- or 150W AC/DC; unit can accommodate three 3.5 hard drive bays and two cooling fans.

800-378-1636; fax: 319-393-2338; [www.crystalpc.com](http://www.crystalpc.com)

Booth: M 9831 Circle (334) on Free Info Card

## Character generator

### Peak Broadcast Systems USA Pilot Ticker:

this character generator is based on Everest real-time graphic software and is available for the SGI NT, O2 and Onyx platforms; it is used in combination with Pilot's database; the software reads electronically delivered financial data for instant display in formats including multiple crawls and non-moving graphic displays.

212-453-4893; fax: 212-453-4884; [www.pilot.no](http://www.pilot.no)

Booth: S 6569 Circle (354) on Free Info Card

## Hard disk recording option

### Solid State Logic MixTrack:

completely integrated for the Axiom-MT digital multi-track console; it functions under direct Ethernet control from the console to eliminate delays in response that occur when console and recorder operate under different software regimes.

212-315-1111; fax: 212-315-0251;  
[www.solid-state-logic.com](http://www.solid-state-logic.com)

Booth: R 2074 Circle (405) on Free Info Card

## Telecine upgrade

### Cintel URSA CALLISTO:

is a simple upgrade package for users of Cintel's URSA Gold/Diamond telecines; it provides those systems with HD capability; employs Cintel's C-Reality technology.

805-294-2310; fax: 805-294-1019;  
[www.cinteltelecine.com](http://www.cinteltelecine.com)

Booth: L 6344 Circle (406) on Free Info Card

## 3D virtual set system

### Evans & Sutherland Mindset Virtual Studio System:


this virtual set system is Windows NT-based and adds increased functionality for easier use and the co-development of a weather interface with AccuWeather.

801-588-1661; fax: 801-588-4511;  
[www.es.com](http://www.es.com)

Booth: S 4862 Circle (408) on Free Info Card

# GPS MASTER CLOCK & Time Code Generator

*Equipped with an internal 8-channel GPS receiver, you can now have time, date and time code within 130 nanoseconds of perfect accuracy anywhere in the world. The ES-185A's best feature is the price, \$2495.*

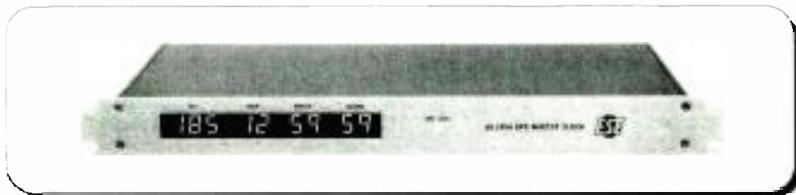

#### STANDARD FEATURES INCLUDE:

- SMPTE/EBU, ESE, IRIG-B, ASCII time Code Outputs
- 1PPS Output • 8 Satellite Tracking • Battery Back-up
- GPS "Lock" Indicator • Automatic Daylight Savings Time Correction
- Time Zone Offset • Antenna • 3 Year Warranty • AND MORE!


#### OPTIONAL FEATURES INCLUDE:

- Parallel BCD Output • 1 KPPS • 10 MHz Output • 220 VAC • 12 VDC
- Video Inserter • Video Sync-Generator



[www.es-web.com](http://www.es-web.com)  
142 SIERRA ST., EL SEGUNDO, CA 90245 USA 310-322-2136 FAX: 310-322-8127

Circle (182) on Free Info Card

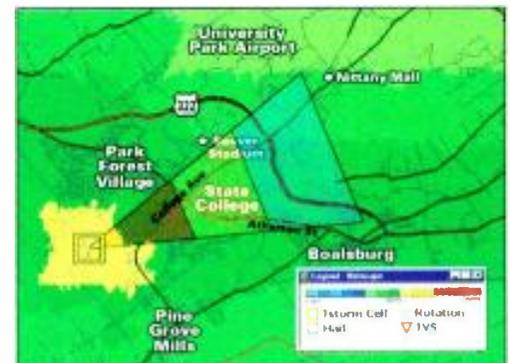

## Radar and weather system

### AccuWeather FirstWarn Neighborhood Nexrad:

new features include ability to set color schemes, echo levels and animate selected echo level; users can also animate projected severe weather movement; control the StormPath analyzer box and display an accurate display of radar data at street level.

800-566-6606; 814-237-0309;  
fax: 814-235-8609;  
[www.accuweather.com](http://www.accuweather.com)

Booth: L11576 Circle (272) on Free Info Card

# 3

## Solutions for HDTV STL



available NOW!

from the LEADER in video broadcast MICROWAVE

Dual Stream

Dual Digital

DS3 System

Nucomm's family of HDTV STL systems offers 3 high performance options for making your transition to digital as easy and economical as possible - and they're available now. The Dual Stream (Dual Carrier), Dual Digital, HD Only (19.39 Mbs) and DS3 systems feature an *open architecture platform* providing you with years of flexibility.



These 3 systems are based on Nucomm's field-proven "Digalog" group of truly digital-ready microwave transmitters and receivers. Other features include:

- Modular design for easy configuration changes.
- Multi-format modulators: QPSK, 8PSK and 16QAM with forward error correction and adaptive equalization.
- Full factory integration and testing.
- System and path analysis available.

For complete information on Nucomm's family of HDTV STL systems contact us today.

Tel: (908) 852-3700  
Fax: (908) 813-0399  
[www.nucomm.com](http://www.nucomm.com)



MICROWAVE SOLUTIONS FOR THE DIGITAL AGE

## HDTV virtual set

### RT-SET Larus HD:

this new virtual set provides a fully integrated and comprehensive real-time, 3D solution at every stage of TV and video program productions; it also offers an unlimited number of cameras (including dissolve) and unrestrained camera movements, and has added capabilities for high definition broadcasts.

877-955-2230; 212-463-9902; fax: 212-463-9931;  
www.rtset.com

Booth: S 6551 Circle (409) on Free Info Card

## NTSC or PAL production switchers

### Sony DFS-700/ 700P DME:

provides full bandwidth component 4:2:2/4:2:0-bit digital processing; standard SDI capability ensures signals from digital sources are input and output with digital purity; digital processing makes the DFS-700/700P ideal for use with VTR or DDR formats ranging from DVCAM, to Betacam SX and Digital Betacam formats or with the MAV-55 VDR.

800-686-SONY; fax: 201-930-4752;  
www.sony.com/professional

Booth: L12107 Circle (371) on Free Info Card



## Fluorescent lights

### Lowel-Light Caselite:

two models, the Caselite 2 and Caselite 4, are equipped with two and four 55W tubes; capable of 120/230V operation and can use Daylight (5400) or Tungsten (3000) corrected T-55 tubes.

800-334-3426; 718-921-0600; fax: 718-921-0303;  
www.lowel.com

Booth: L 9744 Circle (337) on Free Info Card



## Expandable digital router

### Fortel DTV INTEGRITY

features 1.5 Gbit crosspoints to handle HD data rates and SDI input and output cards which provide 8 channels per card; a 4-channel card with dual outputs per channel is also available.

800-530-5542; 404-885-9555; fax: 404-885-1501;  
www.fortelDTV.com

Booth: Circle (484) on Free Info Card

## control solution

### Miranda Technology Kaleido-QC

combines same great features as original Kaleido display system with new web-based device management and control software; used to replace suites of dedicated control panels and monitoring equipment with single computer workstations, or a rack-mounted, touch-screen display.

514-333-1772; fax: 514-333-9828; www.miranda.com

Booth: L 3330 Circle (394) on Free Info Card

## Automated weather system

### WSI Corporation SkyAlert

an automated, lightning-fast system for generating broadcast quality streaming severe weather graphics and alerts; combine up to the second updates from the NOAA Weather Wire with informative severe-weather graphics and icons, and station branding and tag lines.

; fax: 978-670-5100;

Booth: L10971 Circle (395) on Free Info Card

## Severe weather tracking system

### WSI Corporation SkyTracker:

lets stations integrate their custom look with their severe weather coverage; results in a seamless transition between storm tracking coverage and the rest of the weather broadcast.

fax: 978-670-5100;

Booth: L10971 Circle (396) on Free Info Card

## Virtual monitor wall processor

### Miranda Technology Kaleido:

now supports audio signal inputs and incorporates peak level meters for real-time audio-signal tracking; the processor can display up to 16 analog, digital or computer signals on a single projection, plasma or computer display.

514-333-1772; fax: 514-333-9828; www.miranda.com

Booth: L 3330 Circle (397) on Free Info Card

## **VTR/DDR/slow motion controller**

### **DNF Controls DMAT Sports Controller:**

This controller based upon DNF's new ST400 controller, interfaces with multichannel video servers; it enables continuous record and simultaneous playback of sports action; 818-252-0198; [www.dnfcontrols.com](http://www.dnfcontrols.com)

818-252-0198; fax: 818-252-0199; [www.dnfcontrols.com](http://www.dnfcontrols.com)

Booth: L 8683 Circle (398) on Free Info Card

## **16:9, 32-inch video monitor**

### **Sony BVM-D32E1WU:**

a 16:9 32-inch flat monitor for use in critical evaluation; features 16:9 Trinitron CRT; supports 480i, 720p and 1080i inputs directly and displays each at its native frequency and resolution; conforms to ITU 709, ITU 601 and SMPTE 240M; features four option slots that allow use of input decoder and expansion boards



for a variety of input configurations; offers digital uniformity correction, digital landing correction, digital convergence and automatic presets for white balance and brightness.

800-686-SONY; fax: 201-930-4752; [www.sony.com/professional](http://www.sony.com/professional)

Booth: L12107 Circle (373) on Free Info Card

## **Studio camera tracker**

### **InterSense ISO-9000:**

offers seamless transitions between CG and real elements; provides an accurate Six Degree of freedom tracker over large areas for use in virtual environments; inertial tracking is augmented with an acoustic range measurement system for absolute position locking and inertial drift correction.

888-359-8478; 781-270-0090; fax: 781-229-8995; [www.isense.com](http://www.isense.com)

Booth: M10368 Circle (414) on Free Info Card

## **Scan converter**

### **Visual Matrix Corporation RTC2:**

available with an HDTV digital video output option; features zoom and smooth pan/scan capability for camera-like movements; separate horizontal and vertical filters provide an extra level of control for the elimination of flicker, alias and Moire patterns.

818-84304831; fax: 818-843-6544; [www.visual-matrix.com](http://www.visual-matrix.com)

Booth: L7513 Circle (418) on Free Info Card

## **Non-linear editing system**

### **Amazon/Interactive Effects Piranha Edit:**

a high-end online nonlinear editing solution with full support for both D1 and HD1080i uncompressed video; can conform standard CMX EDL files and features full digital AES and ADAT audio support; includes full transition, DVE, character generator and complete compositing capabilities.

714-247-1200; fax: 714-573-9424; [www.ifx.com](http://www.ifx.com)

Booth: S2952 Circle (419) on Free Info Card

# *Something's afoot...*



Circle (184) on Free Info Card

## ENG microwave link

**Adaptive Broadband MRC CodeRunner 2.7:** extends CodeRunner family to the 7GHz band; offers option of incorporating dual-band operation (2- and 7GHz) with a single van transmitter.

978-671-5700; fax: 978-671-5903;  
www.adaptivebroadband.com

Booth: L 7521 Circle (411) on Free Info Card

## High Definition Professional Receiver

### Tandberg Television evolution 5000 PMRX5800:

this receiver focuses on the professional user; it supports all prevalent HD formats and has a wide range of interfacing options.

949-725-2500; fax: 949-725-2545;  
www.tandbergtv.com

Booth: S 4168 Circle (415) on Free Info Card

## Asset management system

### SGI Media Commerce:

enable broadcasters and production facilities to both enhance their efficiency today and create a competitive advantage.

650-960-1980; fax: 650-933-0819; www.sgi.com/go/  
broadband

Booth: S4131 Circle (416) on Free Info Card



## SNG truck

### Frontline News Truck:

nine rack KU Band SNG EFP; built on a Freightliner Argosy chassis; truck is setup for dual path analog and digital SNG along with complete EFP capabilities.

727-573-0400; fax: 727-571-3295;  
www.frontlinecomm.com

Booth: L12386 Circle (455) on Free Info Card

## Console control system

### Studer D950 Digital Mixing System:

supports the new Central Assign Section which allows the functionality of a complete Studer D950 console channel to be display and overated from a single console location, operational sections are provided for EQ, filters, dynamics, panning, input, output, delay, insert, aux sends, fader and channel selection

510-297-2711; fax: 510-297-2785; www.studer.ch

Booth: R 4073 Circle (460) on Free Info Card

## TWT amplifier

### MCL MT3200:

a medium power TWT amplifier for C-band or Ku-band application up to 400W; incorporates five standard, field replaceable subassemblies including the Simplified Logic Interface Module; RF assembly, Prime Power Converter and HV Power supply; offers single communications port for either RS232 or RS422/485 serial bus interface.

630-759-9500; fax: 630-759-5018; www.mcl.com

Booth: T 2028 Circle (461) on Free Info Card

## Klystron high power amplifier

### MCL MK9500:

a klystron high-power amplifier for C, Ku or Ku-DBS band applications; operating power levels extend from 3300W in C band to 2,400W in Ku-DBS band; features superior phase noise performance, serial interfaces, high-speed klystron tuning option and a complete redundant system in a standard height cabinet.

630-759-9500; fax: 630-759-5018; www.mcl.com

Booth: T 2028 Circle (462) on Free Info Card

**TAKE TECHNOLOGY  
EVEN FURTHER.**

Cable 2000 has lined-up a group of experts to give you the knowledge you'll need to stay on the cutting edge of today's broadband media revolution. During this year's ten technical sessions, the industry's top engineering experts will present papers and reports on the latest technological innovations including:

- Advanced Optical & Digital Network Architecture
- Bandwidth Management
- Home Network & HPC Residential Gateways
- IP & Streaming
- Advanced Interactive TV
- Network Operations Improvements
- Traffic Engineering
- PODs and Retail Set-tops
- Return Path Performance

Cable 2000 will feature a very special session on Sunday, May 7, when cable pioneer Archer Taylor of the Strategis Group, presents an oral history from his book "History Between Their Ears: Recollections of Pioneer CATV Engineers, The Richard Schneider Memorial Project."

**CABLE 2000...PLUG INTO WHERE  
TECHNOLOGY IS HEADED TODAY.**

**C2A**

CABLE 2000

MAY 7 - 10, 2000 • NEW ORLEANS, LOUISIANA

WWW.CABLE2K.COM Sponsored by Microsoft


## HMI/MSR lighting fixtures

### Lowel-Light DP Daylight System:

a family of three HMI/MSR fixtures (200-, 400- and 575W), designed to meet requirements of TV and film industries; flicker-free triple output ballast can be used to power wither a 200, 400, or 575w fixture automatically with input voltages from 90-260V.

800-334-3426; 718-921-0600;  
fax: 718-921-0303;  
www.lowel.com

Booth: L9744  
Circle (336) on Free Info Card

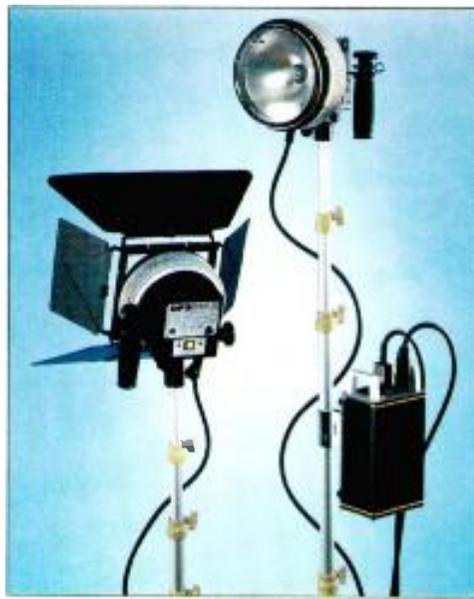

## Facial animation

### FAMOUS Technologies FAMOUSfaces:

a standalone 3D facial and motion capture software package at supports 3D animation programs such as 3D Studio Max, Light Wave 3D, Maya and Softimage; features open motion capture channels to support motion capture sources such as Motion Analysis, Phoenix, Vicon and Xist.

415-835-9445; fax: ; www.famoustech.com

Booth: S5553 Circle (370) on Free Info Card

## Editing control unit w/HD switcher

### Sony BVE-700:

designed for HD production; two jog/shuttle dials provide fast operation of VTR/DDR control; optional plug-in HF video switcher provide cost-effective method of performing A/B roll effects; control is also provided for SD switcher and audio mixers; supports 1080/24p and 1080 60i/50i.



800-686-SONY; fax: 201-930-4752; www.sony.com/professional

Booth: L12107 Circle (372) on Free Info Card

## Decoder/synchronizer

### Fortel DTV DEC-312S

decodes and synchronizes composite analog video (NTSC or PAL selectable) and generates 4 SDI outputs; its 12-bit A/D conversion and processing result in exceptional transparency and improved signal-to-noise; the DEC-312S features an adaptive frame, field and 3 line comb filtering, producing accurate YC separation without undesirable artifacts; used in conjunction with an INTEGRITY serial digital router, the DEC-312S provides a composite analog input channel.

800-530-5542; 404-885-9555; fax: 404-885-1501; www.fortelDTV.com

Booth: L1806 Circle (483) on Free Info Card

# Are we missing something?



Circle (185) on Free Info Card



### Uncompressed NLE system

#### Darim Vision Forward:

this newly integrated desktop digital video system provides real time title and logos, linear/non-linear audio and video editing, color keying, Alpha Channel, zooming and other special effects.

888-GET-MPEG; 213-637-1700; fax: 213-637-1705;

Booth: M10167 Circle (487) on Free Info Card

### Effects plug-ins

#### DigiEffects Delirium/46+ plug-ins for AfterEffects:

this set of plug-ins for Adobe After Effects includes over forty-six separate creative tools for working with video and motion graphics; they can be used to create generate spectacular particle-based fire and smoke, or natural phenomena such as snow storms with flakes that fall naturally on a logo; Delirium also includes a collection of production tools to create simple or sophisticated gradients, lighting effects or retinal-blooms.

415-841-9901; fax: 415-841-1207;  
www.digieffects.com

Booth: S 3305 Circle (489) on Free Info Card

### HD analog monitoring down-converter

#### AJA Video HD10M:

a miniature, stand-alone HD analog monitoring downconverter; accepts 1080i, 180p24 or 720p YPrPb or RGB analog inputs; outputs SD analog RGB, YPrPb or NTSC/PAL composite or Y/C; can be powered by 5-24V for portable applications.

800-251-4224; 530-274-2048; fax: 530-274-9442;  
www.aja.com

Booth: L 3314 Circle (382) on Free Info Card

### DTV translator

#### NEC America Multichannel DTV translator:

uses single common broadband amplifier for several DTV channel, translator utilizes microprocessor controlled active feedback to provide an efficient, stable linear translator in an ultra-compact enclosure.

888-383-4DTV; 972-751-7246; fax: 972-751-7245;  
www.necbroadcast.com

Booth: L 2037 Circle (384) on Free Info Card

### Guyed towers

#### LeBLANC Broadcast SuperTowers:

2049 foot guyed towers capable of supporting 60 tons of top-mounted antenna equipment; have 75 foot candelabras;

905-844-1242; fax: 905-844-8837;

www.leblanc-group.com

Booth: L12355 Circle (401) on Free Info Card

### UHF solid-state transmitters

#### LARCAN Digital Transmitters:

these transmitters are UHF solid-state and IOT, containing up to 75 kw avg. power and VHF solid-state up to 6 kw avg. power; they transmit digital radio for DAB, and Eureka 147 radio for L-BAND and BAND III; 905-564-9222; 905-564-9244; larcan.com

905-564-9222; fax: 905-564-9244; larcan.com

Booth: Circle (403) on Free Info Card

### 30-inch video monitor

#### Panasonic AT-3017W:

a 30-inch 16:9 wide aspect ratio, master-grade HD monitor with capability to display 1080i, 720p, 480p and 480i images; delivers horizontal resolution of greater than 1000 lines due to a temperature compensate shadow mask.



800-528-8601; 323-436-3500; fax: 323-436-3660;

www.panasonic.com/broadcast

Booth: L 8236 Circle (388) on Free Info Card

### Camera robotics

#### Telemetry Triax and Coax camera control systems:

incorporate a separate IFB channel and universal mounting provisions for non-docking and hip pack configurations, external microphone selection switches and improved styling.

800-424-9626; 201-848-9818; fax: 201-848-9819;

www.telemetryinc.com

Booth: L11852 Circle (392) on Free Info Card

### HD multiplexer

#### Motorola Broadband (formerly GI) Multi-channel High Definition Statistical Multiplexer:

applies Motorola statistical multiplexing technology to four HD channels that will occupy 38.8Mb/s bandwidth pipe.

888-800-8346; 858-455-1500; fax: 858-404-2443;

www.gi.com

Booth: L 3123 Circle (399) on Free Info Card



**Rohde & Schwartz  
digital transmitters  
Acrodyne Industries Solid State  
Transmitters:**

are integrated with an 8VSB/ATSC modulator and output mask filter as well as analog systems with an NTSC modulator; UHF models range up to 15kW average DTV power and 40kW analog power; VHF models to 20kW peak visual can be configured to DTV.

800-523-2596; 215-542-7000;  
fax: 215-540-5837;  
www.acrodyne.com

Booth: L 9372 Circle (385) on Free Info Card

**Mobile intercom system**

**Telex Communications RTS Model KP-32 Keypanel:**

a 2RU unit with 32 lever keys (30 intercom talk/ listen assignment; one call waiting respond/clear; one headset/microphone switching); features DSP and binaural headset operation with left/right signal assignment; 90mm depth idea for mobile uses; fluorescent display increases visibility in all lighting.


800-392-3497; 612-884-4051; fax: 612-884-0043; www.telex.com

Booth: L 9366 Circle (386) on Free Info Card

**Laptop editing system**

**Panasonic AJ-LT95:**

a DVCPRO50 4:2:2 laptop editing system; video production capabilities include 525/625 and DVCPRO/DVCPRO50 switchability, 4:2:2 component video quality; 16:9 widescreen monitors and four digital audio channels; weighs less than 26 pounds; includes two 4:2:2 DVCPRO50 VTRs, an editing controller, two 16:9 seven-inch LCD monitors and two speakers in a rugged aluminum case.

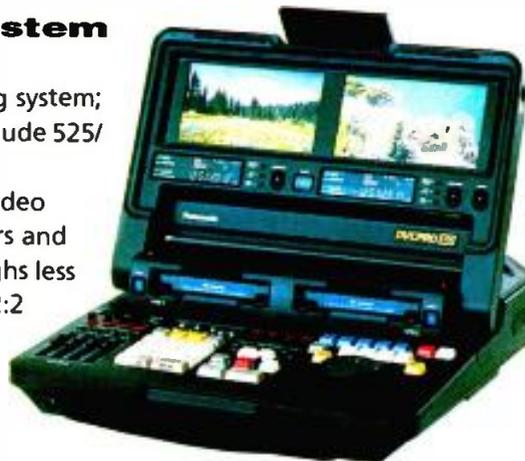

800-528-8601; 323-436-3500; fax: 323-436-3660;  
www.panasonic.com/broadcast

Booth: L 8236 Circle (387) on Free Info Card

**Coax video cable**

**Belden Brilliance Plenum Rated High Definition Coax:**

RG11 HD coaxial cable features 14 AWG solid copper conductor, gas-injected foam, FEP dielectric, a foil/braid shield and Flammarrest jacket.

800-BELDEN1; 765-983-5200; fax: 765-983-5294; www.belden.com

Booth: L 8478 Circle (435) on Free Info Card

**HD coax cable**


**Belden Brilliance Riser Rated High Definition Coax:**

RG7 HD coaxial cable features a 16AWG solid copper conductor, gas-injected foam high-density polyethylene dielectric for superior crush resistance, a foil/braid shield and PVC jacket.

800-BELDEN1; 765-983-5200; fax: 765-983-5294; www.belden.com

Booth: L 8478 Circle (436) on Free Info Card

*Where'd  
they go?*

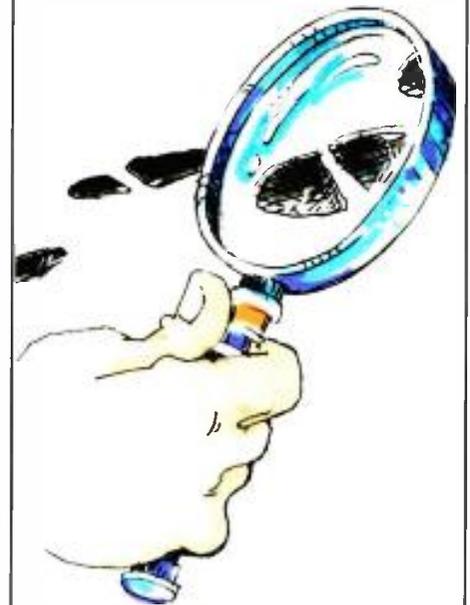

Circle (186) on Free Info Card



### Graphics billboard system

#### Video Data Systems videoGIZMO:

features a single-region display that allows quick and easy Window-based editing; a versatile and independent crawl feature that can overlay pages with message and sophisticated page transitions.

800-858-5850; 516-231-4400; fax: 516-231-4405;  
www.videodatasys.com

Booth: I 6142 Circle (493) on Free Info Card

### Radio/TV broadcast facilities

#### Lodestar Towers Inc Turnkey Broadcast Facilities:

these facilities provide radio and TV broadcast turnkey solutions for design, supply, installation and commissioning; they also provide solutions for maintenance and site management.

561-748-9300; fax: 561-748-8555;

Booth: Circle (404) on Free Info Card

### Hum eliminator

#### Allen Avionics HEC-2000-V:

designed to eliminate hum in video applications caused by long cable runs or ground loops; stops all 50Hz and 60Hz hum; features 1/4" thick guard rails to protect BNC connectors.

516-248-8080; fax: 516-747-6724;  
www.allenavionics.com

Booth: L12410 Circle (421) on Free Info Card



### Dual audio embedder/de-embedder

#### Crystal Vision TANDEM:

features two removable piggyback units on one card; can be configured to any two of four possible functions at once — embedding analog or digital audio into SDI or de-embedding analog or digital audio from SDI; can be a single embedder, a single de-embedder, a dual embedder, a dual de-embedder or a mixed embedder/de-embedder; the kit format means that the customer can build the exact product required and can reconfigure it in the field.

+44 1223 506 515; fax: +44 1223 506 514;  
www.crystalvis.com

Booth: L 9525 Circle (452) on Free Info Card

### HD camera system

#### Band Pro Film/Video High Definition Electronic Cinematography system:

features the Sony HDW-F900 24P HDCAM, Abakus eyepiece extender, Angenieux 11.5x5.3 HD cine-style lens, Chrosziel 6.6x6.6 Swing-away Mattebox system, and Genio Remote Focus/Iris control.

888-BANDPRO; 818-841-9655; fax: 818-841-7649;  
www.bandpro.com

Booth: L11871 Circle (422) on Free Info Card



### Fiber optic link

#### Force Inc Model 2953:

provides fiber optic transport of SMPTE 292M digital video at 1.48Gb/s; includes adaptive coax cable compensation and is compliant with pathological code tests; links are available either at 1310nm or 1550nm and signal transport distance is up to 100km.

800-732-5252; 540-382-0462; fax: 540-381-0392;  
www.forceinc.com

Booth: S 5357 Circle (453) on Free Info Card

### Upconverter

#### COMM-TEC UP 1280:

features three-field interpolations and internal time base correction; output can be set to a DLP or LCD projectors panel, from 800x600 up to 1280x1024; features six inputs for video and four stereo audio inputs.

49-7161-3000-490; fax: 49-7161-3000-400;

Booth: Circle (423) on Free Info Card

### HD signal receiver

#### Harris NETplus:

receives HD signals distributed over fiber or satellite networks; supports a wide variety of inputs and formats.

800-622-0022; 513-459-3400; fax: 513-459-3890;  
www.harris.com

Booth: L 6524 Circle (321) on Free Info Card

### Polarizing filters

#### Tiffen Mfg Corp UltraPol filters:

eliminates the maximum amount of reflected glare from water, glass and other non-metallic surfaces.

800-645-2522; 516-273-2500; fax: 516-273-2557;  
www.tiffen.com

Booth: L11581 Circle (496) on Free Info Card

## Motion picture film cleaning system

### RTI Lipsner-Smith CF-8200:

provides safe, cost-effective cleaning results at up to double the speed of traditional film cleaners; includes a dual refrigerated vapor recovery system, stainless steel plumbing, new air management and higher output ultrasonics.

800-323-7520; 847-677-3000; fax: 847-677-1311; www.rtico.com

Booth: L 7845 Circle (425) on Free Info Card

## MPEG-2 compression plug-in

### Darim Vision DVMPEG Plus:

is a software solution for capturing and compressing AVI to MPEG-1 or MPEG-2, as a plug-in driver, easily creating MPEG files during rendering without intermediate AVI; the software enables users to compress, edit and playback high-quality video and audio.

888-GET-MPEG; 213-637-1700; fax: 213-637-1705;

Booth: M10167 Circle (486) on Free Info Card



## Monitoring mixing console

### Audio Toys Paragon II:

live sound production analog mixing console; up to 20 stereo output mixes, four-band parametric EQs on inputs, three-band stereo EQs on stereo outputs and returns.

800-642-8063; 410-381-7879; fax: 410-381-5025; www.audiotoys.com

Booth: R 3496 Circle (427) on Free Info Card

## XLR cable connection system

### Neutrik NC3FEZY-P and NC3MEZY-B Easycoin:

offers easy and rapid assembly with self-adjusting cable strain-relief; accepts a wide range of cable diameters and gold-plated, self-cleaning tuning fork contacts extend its lifetime.

732-901-9488; fax: 732-901-9608; www.neutrikusa.com

Booth: L12139 Circle (428) on Free Info Card

## 3-chip DLP projector

### Christie Digital Systems Vista X3:

based on three chip DLP technology; results in better uniformity and video with no instances of image retention; designed for large-venue and fixed installation applications.

800-265-2171; 519-744-7111; fax:

519-749-3136; www.christie.com

Booth: M 8035 Circle (492) on Free Info Card



## Video indexing software

### Virage VideoLogger 4.0:

newest version of software for indexing video in real-time; critical first step for any video production, distribution and Internet publishing strategy.

650-573-3210; fax: 650-573-3211; www.virage.com

Booth: M 8751 Circle (429) on Free Info Card

# I remember those guys!



Circle (187) on Free Info Card

## Internet video platform

### Virage Video Search Server 2.0:

a complete Internet video publishing and management platform; accesible via standard web browsers, this server-based application provides a powerful search engine, template-based web page customization and sophisticated annotation and administration capabilities.

650-573-3210; fax: 650-573-3211; [www.virage.com](http://www.virage.com)

Booth: M 8751 Circle (430) on Free Info Card



## D1 to analog converter

### Intelvideo SDI-100:

a 10-bit acquantizing accuracy system with 12-bit internal processing; ideal for professional application where SDI signal needs to be converted to any 525-line 60Hz analog format; features front-panel adjustable luminance and chrominance levels and high-frequency compensation.

203-348-9229; fax: 203-348-9266;

[www.intelvideo.com](http://www.intelvideo.com)

Booth: S 4118 Circle (465) on Free Info Card

## Nonlinear editing system

### Fast Multimedia FAST601 DV:

this IEEE1394 I/O card features a new InTime Processor and allows FAST601 users to input DV footage directly from DV cameras; it works with all FAST601 systems and will allow Batch Capture and Print to Tape.

800-249-FAST; 425-354-2002; fax: 425-354-2005;

[www.fastmultimedia.com](http://www.fastmultimedia.com)

Booth: S 4150 Circle (432) on Free Info Card

## Multiformat video measurement set

### Hamlet ADEPT:

a multiformat capable video "on screen" measuring set; provides Sdi, Firewire, analog component, composite, S-video and multistandard 525/625 measurement and monitoring capability, including line select, bow tie and gamut indication.

+44 0500 625 525; +44 1494 793 763; fax: +44 1494 791 283; [www.hamlet.co.uk](http://www.hamlet.co.uk)

Booth: L12636 Circle (433) on Free Info Card

## Image editor

### Sonic Foundry Viscosity:

fuses process of image editing and animation into one application; offers integrated multiframe editing, animation effects, web optimization and real-time playback.

608-256-3133; fax: 608-256-7300;

[www.sonicfoundry.com](http://www.sonicfoundry.com)

Booth: S 5157 Circle (476) on Free Info Card

## AES/EBU audio cable

### Belden Brilliance 8-pair AES/EBU audio snake cable:

26 AWG cable designed for use with digital audio console equipment; fits easily into standard 25-pin D-sub connectors without stripping the outer jacket.

800-BELDEN1; 765-983-5200; fax: 765-983-5294;

[www.belden.com](http://www.belden.com)

Booth: L 8478 Circle (434) on Free Info Card

## Skirt generator

### Sierra Video Systems Skirt Generator:

inserts two 4:3 images into a single 16:9 frame; presents two images on the screen simultaneously; skirt section can display text, graphics or live video without interfering with the main picture.

530-478-1000; fax: 530-478-1105;

[www.sierravideo.com](http://www.sierravideo.com)

Booth: L 4654 Circle (437) on Free Info Card

## Unattended networked monitoring system


### Videotek SpyderWeb:

designed to communicate audio, video and timecode alarm information from the VTM-300 series and VTM-400HD monitor; alarms may be stored, logged directly to a printer or exported as text for future reference.

800-800-5719; 610-327-2292; fax: 610-327-9295;

[www.videotek.com](http://www.videotek.com)

Booth: L12924 Circle (438) on Free Info Card

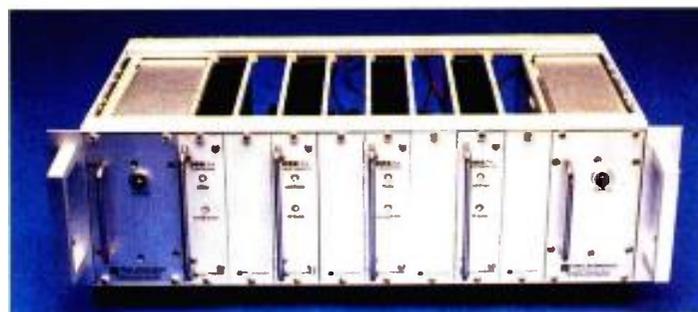

## Satellite link

### Force Inc DBSLinx:

L-Band link now available in rack-mounted version; rack can hold 10 2990 units and one power supply or eight 2990 units and dual redundant power supplies; 2990 will transport over single mode fiber RF signals from 950-220MHz in one octave passband; for antenna remoting, headend relocation, L-band distribution for MDUs and PCS networks.

800-732-5252; 540-382-0462; fax: 540-381-0392;

[www.forceinc.com](http://www.forceinc.com)

Booth: S 5357 Circle (454) on Free Info Card

## Camera fluid head


### Miller Fluid Heads DS 80:

a 150mm fluid head that carries up to 80lb payloads.

973-857-8300; fax: 973-857-8188; [www.miller.com.au](http://www.miller.com.au)

Booth: L 9748 Circle (413) on Free Info Card

# A NEW LIFEFORM IS BEING CREATED!

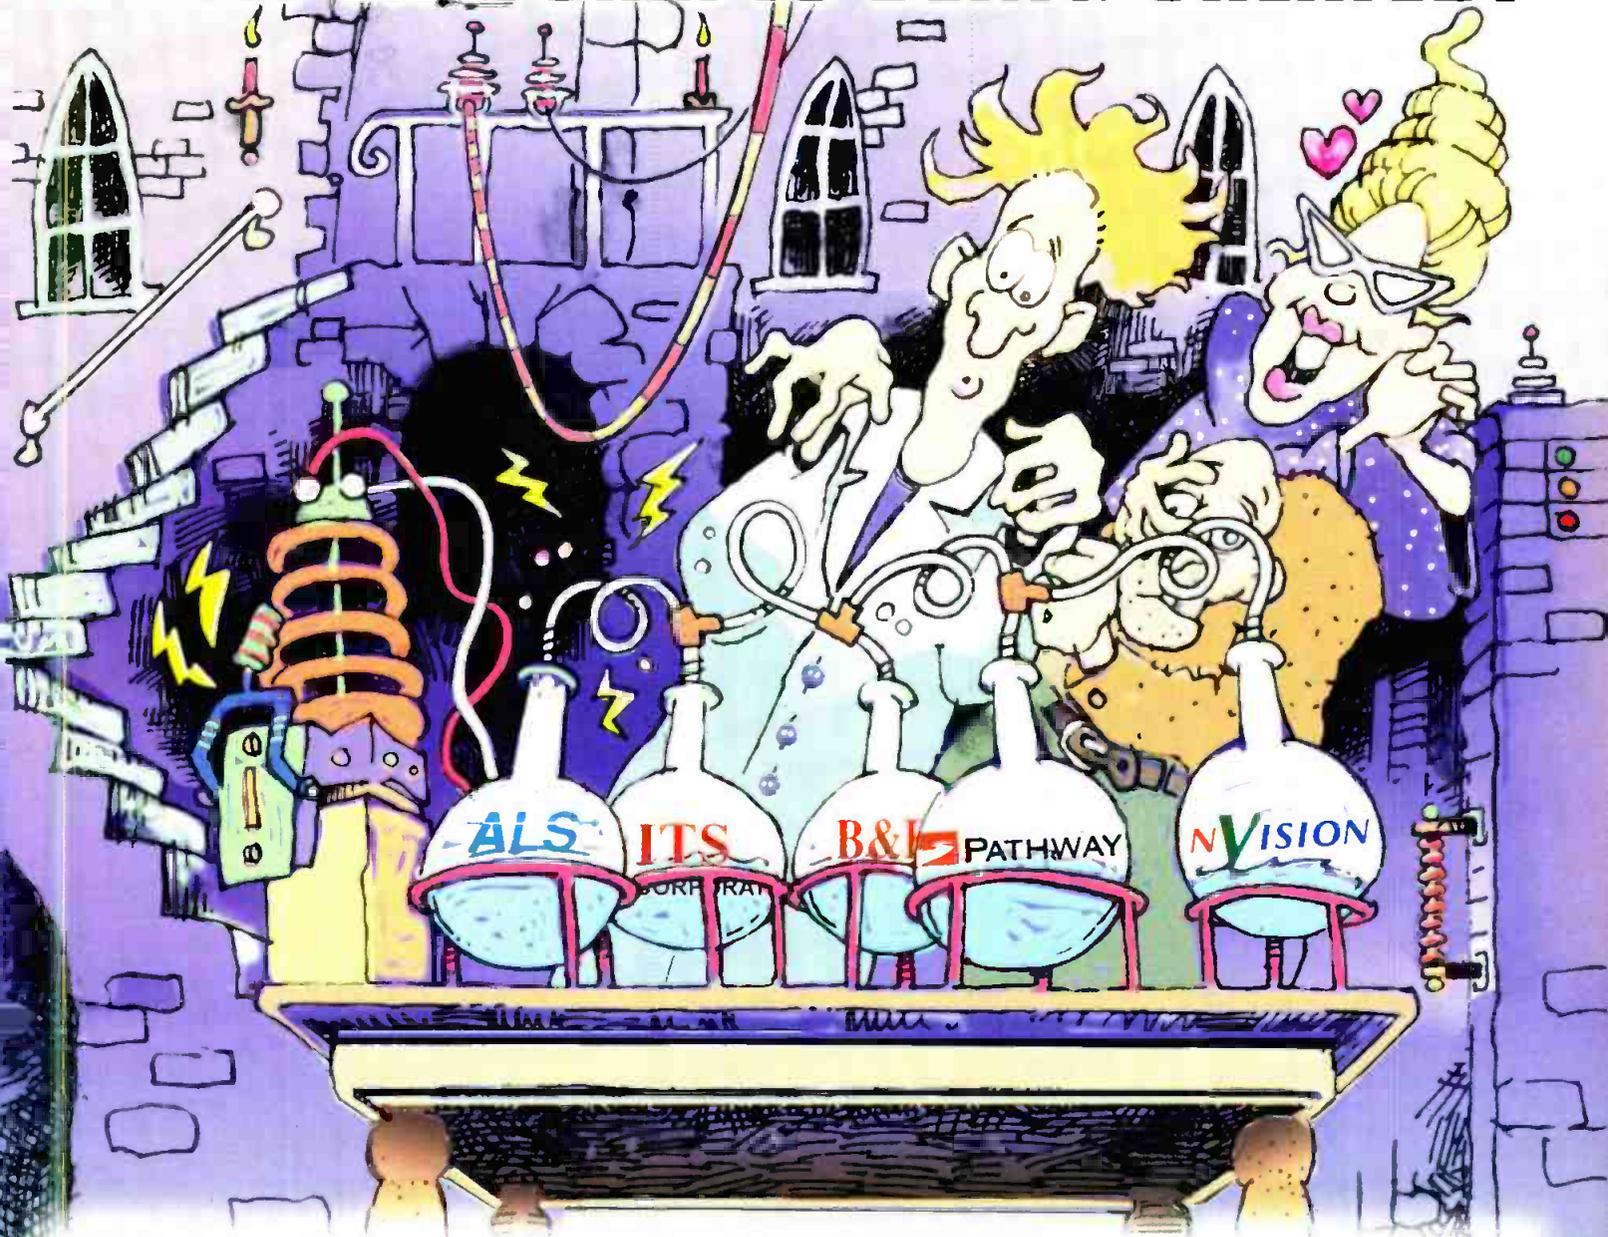

**CHECK OUT OUR NAB BOOTH 1543 TO SEE WHAT WE'VE COOKED UP FOR YOU!**

In recent years, technical innovation has provided the television industry with the ability to recreate itself. Digital systems deliver a higher level of product quality and new services to the audience. However, the implementation of these new technologies requires an end-to-end understanding of system architecture, in order to ensure reliable integration. We call it DTV Science.

Circle (188) on Free Info Card



## Video server

### Storage Concepts Fibre Space-2000:

this video server can provide 700 GB of storage in a single chassis at 170 MB/second; it is successful with high bandwidth, high I/O applications such as HDTV, broadcast video storage and server applications; 800-525-9217; 949-852-8511; fax: 949-852-8930;

[www.storageconcepts.com](http://www.storageconcepts.com)

800-525-9217; 949-852-8511; fax: 949-852-8930;

[www.storageconcepts.com](http://www.storageconcepts.com)

Booth: S 3259 Circle (439) on Free Info Card

## Fiber optic multiplexer

### Video Products Group VGP DWDM:

this applique system multiplexes up to eight 140Mbps, 155Mbps, 270Mbps or 622Mbps signals onto a single optical fiber at ITU-grid wavelengths; 888-375-2855; 805-383-5500; fax: 805-383-5519; [www.vpginc.com](http://www.vpginc.com)

888-375-2855; 805-383-5500; fax: 805-383-5519;

[www.vpginc.com](http://www.vpginc.com)

Booth: S 3574 Circle (440) on Free Info Card



## MPEG TS Splicer

### Astro Systems CX-5505A:

replaces programs in multiprogrammed TS signal and switches between two TS signals; features two TS input channels and one program output supports non-seamless and near-seamless splicing.

818-244-1806; fax: 818-244-1878;

[www.astro-systems.com](http://www.astro-systems.com)

Booth: S 3877 Circle (450) on Free Info Card

## Speakers

### Miller & Kreisel MPS-1610P:

is an internally Bi-Amplified Main Monitor; it is designed to be used with a subwoofer and bass management to provide full-range monitoring for all channels; 310-204-2854; fax: 310-202-8782; [www.mkprofessional.com](http://www.mkprofessional.com)

310-204-2854; fax: 310-202-8782;

[www.mkprofessional.com](http://www.mkprofessional.com)

Booth: S 4175 Circle (441) on Free Info Card

## Compression/MPEG test equipment

### Xyratex MM-1000:

this MPEG monitor provides continuous, cost-effective monitoring of MPEG transport streams; 949-476-1016; fax: 949-476-1916; [www.xyratex.com](http://www.xyratex.com)

949-476-1016; fax: 949-476-1916; [www.xyratex.com](http://www.xyratex.com)

Booth: S 4178 Circle (442) on Free Info Card

## Removable drive video server

### Fast Forward Video Omega Deck:

this video server has a removable hard drive option; it can be controlled via a Windows TM-based PC platform; the custom application software is compatible with Windows 95, 98 and NT-based computer systems; 949-852-8404; fax: 949-852-1226; [www.ffv.com](http://www.ffv.com)

949-852-8404; fax: 949-852-1226; [www.ffv.com](http://www.ffv.com)

Booth: L 4954 Circle (443) on Free Info Card



## SDI noise reducer

### Intelvideo SDI-10:

takes serial digital video inputs, separates video components and processes each component, with 12-bit accuracy, to reduce random noise by more than 9dBs; also adds up to 6dBs of high frequency boost to the luminance signal, video components are reserialized into the SDI format.

203-348-9229; fax: 203-348-9266;

[www.intelvideo.com](http://www.intelvideo.com)

Booth: S 4118 Circle (463) on Free Info Card

## Word clock DA

### NVISION DA4023:

for the 4000 series frame; eight outputs for word clock distribution; one word clock input with loop-through; 75-ohm connector interface.

800-719-1900; 530-265-1000; fax: 530-265-1010;

[www.nvision1.com](http://www.nvision1.com)

Booth: L 543 Circle (318) on Free Info Card

## Compression/MPEG test equipment

### Logic Innovations MM-1000:

this MPEG monitor provides continuous, cost-effective monitoring of MPEG transport streams; 949-476-1016; fax: 949-476-1916; [www.xyratex.com](http://www.xyratex.com)

888-34-LOGIC; 619-455-7200; fax: 619-455-7273;

[www.logici.com](http://www.logici.com)

Booth: T 2240 Circle (446) on Free Info Card

## Digital and analog component/composite WFM


### ProTeleVision Technologies PT 5664:

provides alignment and monitoring in component and composite video environments; features analog displays for serial digital component, analog component and analog composite signals for studio, OB vans, production and post-production houses.

+45 3288 5911; fax: +45 4343 2390; [www.ptv.dk](http://www.ptv.dk)

Booth: L 7133 Circle (447) on Free Info Card

# FOR A NEW ERA OF TELEVISION

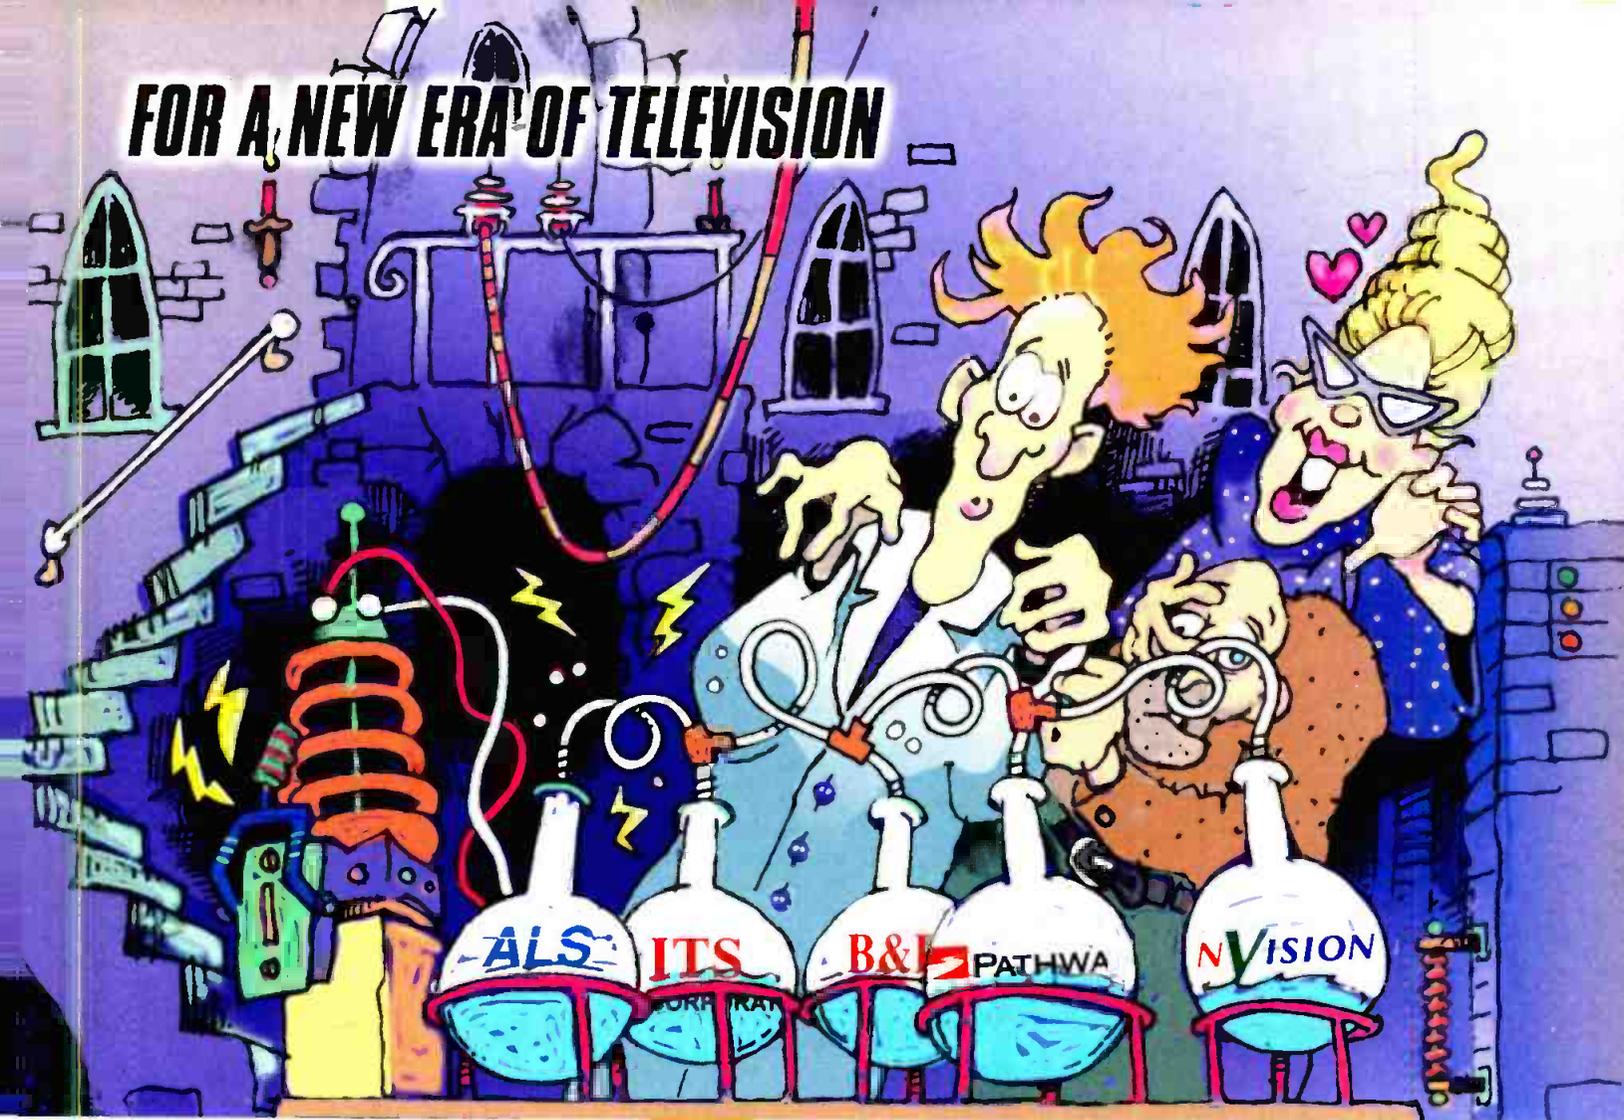

**PV2266-SVJ**  
Pro Patch™  
Video Panel

**VISIONARY DT**  
DTV Transmitter

**DV6000**  
Uncompressed  
Digital Transport  
System

**ACCESSPOINT**  
Universal Media  
Access System

**ENVOY 6128**  
Super Wideband™  
Digital Router



ADC has scoured the broadcast industry to find leading technologists who understand the science of digital television systems. The result—formation of an elite group made up of ADC patching & connectivity, ITS transmitters, ALS transport systems, Pathway ATM transports, and NVISION routing and processing products. All brought together to share knowledge and innovation. We call it DTV Science.

DTV Science enables ADC customers to build a digital infrastructure with confidence. System interfaces can be guaranteed, regardless of data rates. From input to output, signal integrity will be maintained. No longer is it necessary to worry about the quality of a BNC connector, the data rates a router can handle, compatibility with compressed signals, the reliability of an STL, or the implementation of a digital transmitter. ADC can provide all this and more.

Copper  
Coax  
Fiber  
Wireless

Circle (189) on Free Info Card

1-800-726-4266

[www.adc.com/broadcast](http://www.adc.com/broadcast)  
[www.americanradiohistory.com](http://www.americanradiohistory.com)



## Applied Technology

### The digital benefits of solid state transmitters

BY DAN DICKEY

In ten years, there will be no such thing as a tube-type television transmitter. The solid state transmitters on the air today will still be broadcasting after tube transmitters are long gone. That is a bold prediction from a 54-year-old company that built its reputation on vacuum tube equipment.

Continental Electronics Corp. (CEC) has developed its entire line of digital television transmitters around solid state technology that is designed and optimized for digital applications. Meanwhile, older tube technology is essentially being retrofitted and reinvented to fill a need it never was intended to meet. Solid state equipment offers a clear upgrade path, a high level of reliability, and virtually maintenance-free operation. These are the characteristics that are essential in this emerging age of digital terrestrial television.

#### A quick, clear upgrade path

With the emerging viewer demand for digital broadcasting, most stations don't yet require the same power for their DTV operations that is required for NTSC-TV. However as the number of viewers increases so will the

### As the number of viewers increases so will the need to increase power levels.

need to increase power levels. With that reality in mind, the benefits of CEC's solid state transmitter technology can be seen even before it is delivered to the site.

Solid state technology offers a clear upgrade path with minimal initial investment. Stations can begin their digital broadcasting with the exact



Continental Electronic's 714D solid state digital transmitter.

power they need to meet FCC and community demands, then increase power when necessary.

This is possible because the solid state transmitters are built from identical power amplifier components. CEC's SpectraStar line of scalable, solid state DTV transmitters is based on common power units that are added as power requirements increase. This flexibility also will permit broadcasters to remain current with evolving digital standards.

#### Digital by design

As digital television evolves, so does the technology. CEC chose to be a solid state-only company because tube equipment cannot keep pace with the digital evolution. The evolution of solid state, on the other hand, is driving new innovations designed specifically for digital applications.

The laterally diffused metal oxide semiconductor (LDMOS) is one example of such advancements. Besides being less costly to fabricate, LDMOS chip sets were designed specifically for broadband communications applications, from wireless telecommunications to commercial broadcasting.

With broadband operation in mind, LDMOS chips are more rugged and will withstand greater load mismatch abuse. In high-power applications, LDMOS chips deliver a higher gain than equivalent bipolar devices, approximately 12- to 15dB, and they offer a greatly improved level of linearity. All this adds up to a rugged and reliable foundation for DTV transmitter products.

That is exactly where CEC began with the SpectraStar product line. The result is a RF amplifier designed around 250W LDMOS power blocks, bringing with it the inherent benefits of LDMOS -- high efficiency, excellent linearity and improved reliability due to lower junction temperatures in a reduced component population. The built-in re-

# Create Stellar Broadcast Graphics In Record Time

- Fully Non-Destructive Paint, Rotoscope, Animation and Compositing Tool Set
- Particle System Dynamics Provide Easy Real World Motion including Velocity, Gravity and Friction
- Air Brush Directly Onto Live Video with Variable Transparency and Broadcast-Quality Anti-Aliasing



**Air Command™**  
Live Broadcast  
Production  
Switcher

**Preditor™**  
Comprehensive  
Real-Time NLE

**Warp Engine™**  
Breakthrough  
Real-Time  
3D DVE

**TitleWave™**  
Sub-Nanosecond  
On-Air CG

**Panamation™**  
Paint, Animation  
and Compositing

**Deep Freeze™**  
Instant-Access  
Still & Clip Store




Before your client even sits down with you, they've been bombarded with thousands of quality graphics on network television. Today, anything less just won't do, and that's why



more and more video professionals rely on Trinity's powerful paint, animation and

compositing system, Panamation. Its fully object-oriented graphics engine gives you a comprehensive set of tools for complete control of the creative process. Paint with smooth air brushes in 3D perspective and multiple layers. Use adjustable light sources to cast soft-edge shadows while drawing. Quickly create stencils and mattes with a variety of brushes and keys. And that's just the beginning.

Of course, video production requires more than just a great paint system, and that's why Trinity includes a powerful real-time CG and lightning-fast still store.



In fact, Trinity delivers all the tools of live and post production in one integrated, easy-to-use system at a fraction of the cost of comparable gear. Visit our web site today to see for yourself just how far Trinity can take your productions.

**For more information or to locate a dealer near you, visit our web site or call today.**

[play.com/paint](http://play.com/paint)

Toll-Free 1-877-752-9594  
Circle (190) on Free Info Card



*Trinity*

**The Complete  
Broadcast Production  
Studio-In-A-Box**

Air Command, Predator, Warp Engine, TitleWave, Panamation, Deep Freeze, Trinity and their logos are trademarks of Play Incorporated. All other trademarks are property of their respective holders. Play is a registered trademark of Play Incorporated. Copyright ©2000. All Rights Reserved. The Trinity system and its components are covered by U.S. Patent Numbers 5,872,565, 5,978,876, and 5,941,997; other patents pending. [www.americanradiohistory.com](http://www.americanradiohistory.com)

dundancies made possible by the LDMOS design mean CEC's solid state transmitters are inherently fully redundant, eliminating the need for a backup transmitter.

CEC's solid state design eliminates all tunable components within the amplifier. Tube transmitters generally have tunable input circuits and output circuits. Setting these adjustments requires an experienced engineer and a significant investment in test equipment.

There are significant technical advantages in digital applications for wideband input circuits afforded by solid state as opposed to tube amplifiers. CEC's amplifier modules are field programmed to the correct frequency for near plug-and-play simplicity.

Solid state transmitter systems bring the plug-and-play concept in focus with the elimination of complicated RF switching systems that are used on many multiple tube

amplifiers. Because a solid state transmitter is made up of multiple power modules, the failure of a single module does not lower the output power significantly. In a two-tube transmitter, the failure of a single component can reduce the power by a 4:1 ratio unless a com-

## **Solid state transmitters eliminate the need for a crowbar device, offering a major advantage over most IOT transmitters.**

plicated RF switching system is installed. These RF switches are expensive and mechanical in nature and can fail, leaving a station in no better shape.

When a problem in a solid state transmitter does crop up, it is generally easier to troubleshoot than tube

transmitters because each module can be equipped with a diagnostic system. The control unit can display all operating parameters on every module. A broadcasting engineer can easily locate system failures without special test equipment. When the problem is pinpointed, the "hot swappable" modules enable the transmitter to be serviced while still on the air.

Solid state transmitters eliminate the need for a crowbar device, offering a major advantage over most IOT transmitters. A crowbar can cause serious power line fluctuations when it is engaged. As more and more broadcast facilities become digital this can be a concern. Solid state transmitters are powered by the same type of power supplies used by sophisticated, high-end mainframe computer systems, and do not create significant disturbances to the power line.

### **Virtually maintenance-free**

Most IOT transmitters are water-

# **AUDIO CROSSPOINTS ARE NOW OBSOLETE LIGHTHOUSE DIGITAL SYSTEMS**

TODD A/O

Craig Nichols

Hollywood, CA

In front of an 848 x 848 DZ  
TDM & High Def Router.



### Audio Products

- 1024 x 1024 TDM/DSP Routing without tie-lines. Combine digital, analog, synchronous, asynchronous and remote frame/MADI inputs in a single system...and route them to any output. Up to 60% space savings over competitive models.
- Sample rate converters on all AES inputs.
- Mix stereo to mono and vice versa.
- MADI (56 channel) or 64 channel satellite I/O.
- RS422 and Time Code I/O.

### Video Products

- 64 x 128 I/O High Definition Routers with reclockers & equalization.
- 256 x 512 I/O Serial Digital Routers.
- Copper or fiber on any I/O module.

### Control Products

- Hardware Control Panels, Internet control, Java/Network Control Panels, NT Server, second party control and Touch Screens.



Founders Bob & Rick Grant

Please contact us

• Lighthouse Digital Systems • 888 494 7300 • FAX 530 272 8248 • <http://www.lighousedigital.com> •

Circle (191) on Free Info Card



# END2END

## BUSINESS SOLUTIONS

ASSET MANAGEMENT • PROGRAMMING • BILLING • E-BUSINESS

### The Most Complete Business Solution In The Industry

Automation isn't what it used to be. No longer a detached entity, you want automation to link to traffic and billing and programming and digital transmission management. You also want to expand a single channel system to five, ten, even one hundred or more automated channels.

We do that.

And more.

With products for traffic, billing, digital automation, asset management, programming, and e-business, CJDS-DAL can provide an end-to-end business solution today.

**Tomorrow's business solutions... today**



©Columbine JDS Systems, Inc.  
©Drake Automation Ltd.

DIGITAL | MEDIA | CONVERGENCE™

EUROPE: 14 Cedarwood • Chineham Business Park • Chineham, Basingstoke • Hampshire RG24 8WD U.K. • 011 44 1256 379000 • cjdsdal.com

USA: 1999 Broadway • Suite 4000 • Denver, Colorado 80401 USA • 303 237 4000 • cjds.com

Circle (192) on Free Info Card

See us at NAB Booth #'s L10471 and L9738

www.americanradiohistory.com

cooled while CEC's solid state designs are air cooled. Many climates are not well suited for water-cooled equipment; particularly the northern states where in the winter, water systems are prone to a multitude of problems. Even in warmer climates, extreme temperature changes from cold to hot during the year can fatigue water couplings and create nuisance leaks. A small air leak in an air-cooled transmitter is not a problem. However, a small water leak can be a big problem.

Completely air-cooled transmitters provide other benefits as well. The high installation and maintenance costs of liquid cooling systems used in IOT and Klystron-based designs are unnecessary, reducing initial and long-term investments in the overall system.

Power supply voltages used in solid state transmitters are about 500

to 1000 times lower than tube transmitters. Since high-voltage circuits tend to collect dust more quickly, a tube transmitter generally requires special cleaning. When dust does collect on a high-voltage component, it can cause a damaging high-

## **Solid state technology, with its obvious benefits, is cost competitive with older tube equipment up to 40kW.**

voltage arc-over, which can knock the station off the air.

Today, solid state technology, with its obvious benefits, is cost competitive with older tube equipment up to 40kW. The initial solid state transmitter purchase outlay is now near the level of tubes while total life

cycle costs are much lower. That's a substantial bargain considering solid state equipment is easier and quicker to manage, from installation and training to maintenance and upgrades.

Wines get better with age, not tube technology. Everyone is working to remove tubes from the digital chain, from DTV transmitter manufacturers to DTV receiver manufacturers. Why should your station's transmitter be caught in the middle as the only tube in the digital television broadcast chain?

*For more information on Continental Electronics Corporation's solid state television transmitters, circle (553) on the Free Info Card.*

*Daniel L. Dickey is vice president of engineering for Continental Electronics Corporation.*

# [www.broadcastengineering.com](http://www.broadcastengineering.com)

Engineering Conference

## **Cable-Tec<sup>®</sup> Expo<sup>®</sup> 2000**

**June 4-7**

**Las Vegas Convention Center  
Las Vegas, NV**

The consumer demand for the benefits of technology is increasing. Broadband network operators have to build and maintain the networks that will enable new products, applications and services to work seamlessly to meet the customers expectations.

- Will the network be reliable?
- Will it be able to carry all of the communications, entertainment and data services that are anticipated?
- What engineering and operational opportunities exist to provide the fully capable broadband network of the future?

The plug-and-play future brings high expectations.

The Engineering Conference will provide insight to these pressing questions.

**For more information contact:**

**Society of Cable Telecommunications Engineers Inc., 140 Philips Road, Exton, PA 19341-1318  
Phone: 610-363-6888 ▪ Fax: 610-363-5834 ▪ E-mail: lbower@scte.org ▪ Web site: www.scte.org**

# In the heart of Digital Broadcast

## MPEG-2 ATSC/DVB



Visit us at NAB 2000  
Booth # L13286



Simulation  
Development  
Validation

Installation  
Troubleshooting  
Monitoring  
Supervision



**Wavetek Wandel Goltermann** offers a full range of innovative test and supervision solutions for world-class support of all the players in digital-TV provision. Our objective... to provide our customers with complete control over all MPEG multiplex parameters and components.

Our **Digital Broadcast Test Solutions** enable faster time-to-market for developers, quicker troubleshooting in the field, easier system integration and maximum uptime of Digital Broadcast services, to the benefit of the end-customers.

Employing 2600 people worldwide, Wavetek Wandel Goltermann is a leading provider of a global range of communications test equipment and systems for **Telecom, Datacom, Cable** and **Digital Broadcast** infrastructures.

For more information or the free evaluation software, contact us at:

**(800) 851-1202**

or visit our Web site at:

[mpeg.wwgsolutions.com](http://mpeg.wwgsolutions.com)

Also you can contact us at:

[mpeg@wwgsolutions.com](mailto:mpeg@wwgsolutions.com)



**WAVETEK  
WANDEL  
GOLTERMANN**  
Communications Test Solutions

## Applied Technology

### Ampex DST Video Server Archival Storage

BY JOHN HENNESSY

With television playout applications quickly transitioning to video server-based systems, the requirement to store hundreds to thousands of hours of file-based digitized video program content looms as a new and challenging task for broadcast technical staffs.

Retaining ingested video as JPEG or MPEG video data files helps accrue cost savings benefits as well as operational efficiencies for television news and master control operations. For material that must be retained for future use, storing video in its data form requires far less media than archiving the content at its original bandwidth on videotape. Acceptable broadcast MPEG

archival storage products provide unmatched performance in terms of access speed to files, storage capacity per cartridge and robust long-term interchange.

Emerging video server archive applications are in essence providing an extension to video servers' integrated disk-based storage. A good example is at KRMA (Denver/PBS), where they are integrating an Ampex DST 812 12.8TB video server archive system. Content flows in and out of the archive based on the playlist requirements of the automation software controlling the facility. Since changes to the playlist may require immediate response from the archive, the system must be de-

signed to react quickly. DST systems differ considerably from the average data tape drive used in the enterprise storage market. DST drives are true archive devices. They are designed to have tapes quickly loaded and unloaded on a constant basis. They search for data a magnitude faster than any other tape storage system, while their data transfer speeds far exceed linear tape storage devices and their long-term interchange and archival properties are second to none.

ferently than videotape recorders, Ampex DST drives draw on the unique technologies pioneered for their videotape recorders to provide strong performance in the data archive world. Air-lubricated tape guides coupled with a low-friction direct drive capstan (no pinch roller) minimize file access time by moving tape at 1600MB/s. To put this in perspective, other high-performance pinch roller-based helical scan data tape drives search for data in the 300- to 400MB/s range. The air system keeps the tape path clean and also provides for gentle tape handling by presenting a cushion between the tape guideposts and the back coat of the tape.

Since requests for program and commercial spot material are made on a random basis, most archive retrievals involve a new tape mount. Due to design limitations, most data drives load and unload tape at a single point, requiring excessive rewind before a tape can be removed. To enhance access time to the next video data file, DST tape drive architecture includes system zones. A system zone is an area on tape reserved for loading and unloading

of the tape cartridge. Created when formatting a tape, multiple system zones make DST drives appear as virtual disks within the video server storage environment.

There are a number of items that influence the overall access time to a data file, including robotics movement, the time to search down a tape to locate a file, the time to physically load a tape and prepare for read/write operations, and the time it takes to unload a cartridge after the read or write function. For applications that include long-for-

**HOURS OF VIDEO CONTENT**

Compression rate	100GB cartridge	300GB cartridge	660GB cartridge	DST 414 4.8TB	DST 714 7.6TB	DST 714 11.6TB	DST 814 25.6TB
48Mb/s	4.6	13.8	30.4	212	352	534	1178
36Mb/s	6.2	18.6	40.6	284	468	720	1588
20Mb/s	11.2	33.4	73.4	534	844	1288	2844
15Mb/s	14.8	44.4	97.8	684	1126	1716	3788
12Mb/s	18.36	55.4	122.2	856	1408	2156	4762
10Mb/s	22.2	66.6	146.6	1066.6	1688.8	2577.6	5688.8
8Mb/s	27.6	83.2	183.2	1333.2	2111.0	3222.2	7111

Table 1. DST video data file storage capacities in hours.

levels provide a storage capacity advantage of up to 20 times greater than videotape. Moving these files from server to server or server to archive via computer networks allows for video material to reach its destination several times faster than real time.

Leveraging 50 years of magnetic recording expertise, Ampex once again is playing a key role in providing video storage solutions for the broadcast industry. Utilizing the same robust 19mm transport designed for the D-2 composite digital video format, Ampex's DST


Although data tape drives operate dif-

ferently than videotape recorders, Ampex DST drives draw on the unique technologies pioneered for their videotape recorders to provide strong performance in the data archive world.




1936

First Television Broadcast



1954

First Color Broadcast




1956

Video Tape Introduced



1962

First Satellite Transmission



1998

Introduction of SeaChange Broadcast MediaCluster

# Big Changes Create Big Opportunities



**"We've used other servers. But nothing else could expand our multichannel broadcast operation more cost effectively."**

*Barry Fox  
Vice President and  
General Manager  
Group W  
Network Services*



**"In SeaChange, we've found a technology partner that empowers us to execute our aggressive digital TV strategy."**

*Craig D. Bury  
Director of Engineering  
and Technology,  
United Pan-Europe  
Communications, N.V.*



**"We discovered that only SeaChange's Broadcast MediaCluster hit the combination of reliability, quality and 'bang for the buck.'"**

*Ralph Turk  
Chief Engineer  
KVOA*

Television evolves in leaps. The latest is the Broadcast MediaCluster from SeaChange.

The benefits are dramatic. Around the world, broadcasters are capitalizing on opportunities created by this video server system. Television's best are becoming more efficient, more precise, more profitable. They're using data networks to transform the business of television.

The time is right.

SeaChange International, Inc  
124 Acton Street  
Maynard, MA USA 01754  
tel. 1-978-897-0100  
fax. 1-978-897-0132

[www.schange.com](http://www.schange.com)

**SEACHANGE**  
INTERNATIONAL

mat video programming, the read or write time is significantly enhanced by archiving video as a file, particularly with DST data drives that sustain data transfer at 160Mb/s. A DST drive can retrieve from archive an hour-long video encoded at 15Mb/s in less than six minutes or over 10 times faster than from the original videotape.

Another major benefit of archiving video libraries as data files is the storage density achieved, especially on helically scanned DST tape cartridges. Today, a large 330GB DST cartridge stores approximately 50 hours of 15Mb/s MPEG video. At NAB 2000, Ampex will introduce its next generation quad-density DST tape drive providing uncompressed storage of 660GB on a single cartridge, the equivalent of nearly 100 hours of 15Mb/s MPEG files (See Table 1).

In addition to its storage advantages, DST tape cartridges also provide unique formatting options. While the system

zones noted above enhance access time, the ability to partition tapes allows users to replace material within a DST tape similar to a video insert edit. By contrast, most other data tape drives write files sequentially down tape, appending file after file until full. If a file is written over in the middle of a full data tape, all the data is lost past that point. Partitioning a DST tape essentially creates a number

of small tapes within one cartridge. For example, to store three-minute music videos encoded at 15Mb/s, the tape would be formatted with 340MB size partitions, thereby allowing one music video to be stored per partition. To replace the video, the existing file can simply be written over since all other music videos are protected within their own partitions. To reclaim space on a data tape that does not support partitioning, however, the entire contents of the tape must be transferred to a disk array, the files to be deleted must be

removed and then the files needed must be written back to tape.

All the functionality mentioned above is meaningless unless it's incorporated into a robust tape transport that will ensure long-term archive and interchange. At the heart of the DST tape drive is its 19mm tape transport. Initially designed for Ampex's D-2 composite digital tape format, today's product has been refined and enhanced to meet the needs of demanding data archive applications. The new quad-density version is the fourth-generation DST drive. Field proven transport mechanics combined with three levels of Reed Solomon error correction create a high-performance storage solution to protect television facilities' critical video assets. The archive life of any individual tape is only as good as the error correction and long-term stability of the data tape drive.

For more information on Ampex's DST archival storage products, circle (552) on the Free Info Card.

John Hennessy is director of video and broadcast marketing for Ampex Data Systems, Redwood City, CA.

## Ampex once again is playing a key role in providing video storage solutions.



**Best Power**  
UNINTERRUPTIBLE  
POWER SYSTEMS  
From 250VA to 220kVA



YOUR BROADCAST  
SYSTEM IS NOT  
COMPLETE  
WITHOUT ONE

**NORTH STAR TECHNICAL SERVICES**  
Power Protection Specialists To The Broadcast Industry  
Including Sales, Service And Battery Replacement

Call Today Or Visit Our Website

(800) 842-1671 • [www.nstpower.com](http://www.nstpower.com)

Circle (195) on Free Info Card See us at NAB Booth # L12852

**WHAT AUTOMATION  
BACKUP?**

BACKUP YOUR AUTOMATION SYSTEM  
IN CASE OF FAILURE, LOAD AND PLAY  
ONE CLIP OR A GROUP OF CLIPS. **DNF**  
CONTROLS

Call us at (818) 252-0190 or visit us on the web: [www.dnfcontrols.com](http://www.dnfcontrols.com)

Circle (196) on Free Info Card

# generate revenue while the competition waits.



IMAGE A



IMAGE A

## Improve your workflow with a SAN solution from Ciprico.

Time is money in the fast-paced worlds of **entertainment and broadcasting**. You can't afford to waste either one with inefficient, unnecessary file transfers.

Now you can maximize production time. Speed your operation's workflow. And maximize your revenue potential with a totally **integrated SAN solution** from Ciprico, the leader in direct-attached and networked storage solutions for the visual imaging market.

Ciprico's **superior** line of SAN solutions are fast, reliable, easy to install, and ideal for **work groups** where time saved means revenue gained.

Visit our web site at [www.ciprico.com](http://www.ciprico.com) to see how we help visual imaging companies maximize their capabilities by **streamlining project workflow**. Or call 1.800.727.4669



**CIPRICO**  
Protecting your image

Circle (197) on Free Info Card

Ciprico Inc. Headquarters:  
2800 Campus Drive, Plymouth, Minnesota 55441 • 612.551.4000 • Fax: 612.551.4002  
Ciprico International, Ltd.: United Kingdom • Singapore • Tokyo

[www.americanradiohistory.com](http://www.americanradiohistory.com)

### Logic Innovations' MM-1000 MPEG monitor

BY RICHARD BAUARSCHI

As we approach the new millennium, broadcasters, satellite service, cable and telco providers are making significant strides in the transition to true digital data delivery. The move to digital production and delivery creates new challenges in asset distribution and management, creating a need for appropriate monitoring, test and control.

#### Monitoring whys and wheres

The DVB ETR290 specification outlines recommended "health check" tests for the syntax and consistency of data contained within the transport stream. Most of these tests, either continuous or periodic, are performed on the header information within the packets and are available on streams that have conditional access applied. The tests are prioritized into three categories: (1) those necessary for decodability, (2) continuous or periodic monitoring, and (3) application dependent monitoring. Unfortunately, while these tests are valid for testing the health of the transport stream, they aren't necessarily a definitive answer to monitoring, as in the case of using statistical multiplexing techniques for broadcast, cable or DBS. In this scenario, remultiplexers are used to insert local program feeds and other content, or simply to change the SI (System Information) data to reflect transmission over a cable network rather than through a terrestrial network.

Errors may be introduced to a signal when it traverses multiple hops as it is being transmitted. This can occur in microwave, fiber optic and satellite links. The result is the potential insertion of new coding, which necessitates content monitoring at the input and output of each multiplexer.

At this point, monitoring will evolve from looking at basic synchronization issues on the transport stream level to monitoring detailed Program Specific Information (PSI). Specifically, broadcasters, cable operators and satellite providers will require more sophisticated and flexible monitoring tools.

#### Field monitoring and analysis

The next generation MPEG-2 monitoring and analysis systems must be both cost-effective and flexible while retaining an open architecture to match the operational needs of a growing

form, with any number of users capable of interfacing with a single or multiple monitoring points.

#### Logic Innovations' MPEG monitoring system

Logic Innovations has developed an MPEG monitoring system that follows this new paradigm. The MM-1000 MPEG monitoring system is a cost-effective, scalable network-attached MPEG-2 analysis system aimed at meeting the rapidly changing needs of MPEG-2 compliance testing within the broadcast, cable, DBS and video-based markets. It is the first scalable network-attached test system that permits remote operation and unobtrusive, continuous 24/7 monitoring of DVB or ATSC transport streams at multiple points in the signal chain.


Among its many benefits is the capability to isolate faults in real time rather than dragging a single very expensive tester from one location to another to perform sequential fault isolation.

As the facility's requirements grow, the system's scalable architecture permits users to add to the number of monitoring points without interrupting the existing network or user interface.

The standard MPEG monitor interfaces are: asynchronous serial Interface (ASI) with payloads up to 52Mb/s; synchronous parallel interface (SPI) with the same payload; and synchronous serial interface (SSI) at the rates defined in SMPTE 310M.

#### Remote operation

The MPEG monitor seamlessly blends computer networking technology with powerful test and monitoring functionality. The network connection, via its network-attached interface, employs a

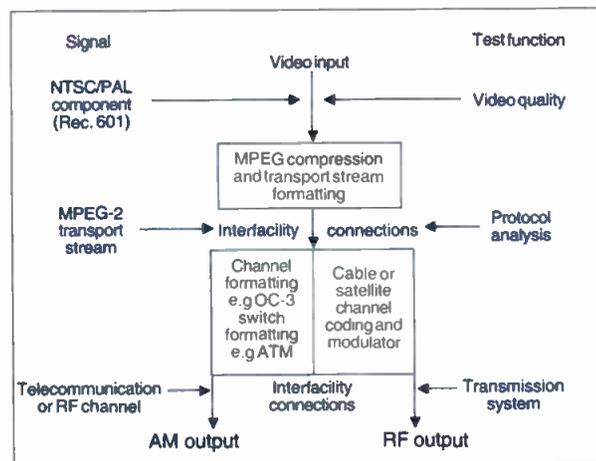

Functional MPEG-2 testing layers

network. They must also be scalable since the number of streams to be monitored may change.

Furthermore, the system should be network-oriented as most facility architectures will migrate to a combination of local area network (LAN)/metropolitan area network (MAN) or wide area network WAN/global area network (GAN) infrastructures. Therefore, the need for monitoring systems to communicate locally or remotely will become critical. Each monitoring point should be remotely configurable and viewable from any computer plat-

*The Power To Create. The Means To Deliver.*



**TCI's National Digital Television Center is now AT&T Digital Media Centers.**

The extensive and elite capabilities of the former NDTCC have been enhanced by the tremendous new resources and global connectivity gained by becoming a member of the AT&T family. AT&T Digital Media Centers are in an extraordinary position to serve the broadcast industry with the most complete, advanced, flexible, and powerful digital media services in the world.

**Network Origination • Production • Interactive Television • Streaming • Global Transmission**

Whether you require one or all of the above,  
there is just one source that can provide the best of everything you need.

**Call 303.486.3895 and discover the power to create and the means to deliver.**



**AT&T Digital Media Centers**

Circle (198) on Free Info Card

Java user application interface. This unique feature permits platform independence for the clients and affords unprecedented versatility by allowing monitoring of DVB or ATSC transport streams emanating from multiple points from a single location.

By using Java rather than HTML pages and a Web server, the user with a single application can be in communication with multiple MPEG monitors simultaneously, viewing a Java application that has been automatically downloaded from the MPEG monitor.

Network personnel can now look from remote locations at the test equipment that the individual station is using to monitor its own operation. Moreover, to avoid congesting the network, the MPEG monitor sends out a 50 byte "heart beat" packet at regular intervals containing all the pertinent information on the unit's address and device-under-test's health. Each heart beat can be monitored by a single client or thousands of clients without increasing the need for network bandwidth. Because of its low bandwidth requirement, hundreds if not thousands of units can be monitored at any given time.

### Functionality

In operation, stream monitor and error-checking functions start with the basic ETR 290 stream syntax checking. With its user-definable interface, ETR 290 error checking can be set to indicate whether certain variants are or are not permitted or if certain items are to be checked at all. The MPEG monitor also includes pre-defined setups for MPEG-2 DVB and ATSC installations. Error logging and notification based on ETR

290 parameters and other parameters specific to ATSC and DVB are standard with the system.

Through a digital PLL program clock reference, the MPEG monitor can emulate the decoder buffers for a particular program, allowing for real-time buffer fullness checks. Time stamp delay checks can also be accommodated for monitoring timing misalignment between video and audio.

The MPEG monitor also performs Stream Query. Stream Query allows users to find out what's in a stream and how the stream is put together. With Stream Query, the user can view the structure of the transport stream (PID/program assignments) and the contents of tables (in either raw hex or fully field-decoded form), and the bandwidth consumed by various elements of the stream. This capability includes MPEG-2 and its DVB and ATSC variants and the tables specific to each of these formats.

The MPEG monitor also offers the option of capturing transport stream segments when an error has occurred — giving way to "at-a-glance" remote system monitoring, rapid fault isolation and off-line analysis for troubleshooting and preventive maintenance.

As the industry moves toward a new era in digital, it's reassuring to know that equipment such as an MPEG monitor will allow facilities to ensure signal integrity. ■

*For more information on Logic Innovations' MM-1000 MPEG monitor, circle (554) on the Free Info Card.*

*Richard Bauarschi is director of product management for Logic Innovations, Irvine, CA.*

## **bvs** V-CHIP RATING MONITOR



**The economical VC-2 provides broadcasters with an instant, visual display of Content Advisory ratings**

- Transparent video specifications
- Operates from loop-through composite video
- Extracts, decodes and processes V-chip data carried on line 21, field 2 of the Vertical Blanking Interval
- Six, 14 segment LED displays provide a graphic, alpha-numeric readout of both Age and Content rating as per EIA-744-A
- Supports the following rating systems: M.P.A.A. / U.S. TV Parental Guideline / Canadian English Language / Canadian French Language
- Housed in 3¼" x 3" x 1½" steel minibox
- 9V DC adapter supplied
- Up to 5 VC-2's may be mounted in a 1RU frame (FR715)

### **broadcast video systems corp.**

40 West Wilmot St., Richmond Hill, Ontario L4B 1H8  
Ph(905)764-1584 Fax(905)764-7438 E-mail: [bvs@bvs.on.ca](mailto:bvs@bvs.on.ca)  
Website: [www.bvs.on.ca](http://www.bvs.on.ca)

Circle (200) on Free Info Card See us at Booth #L9519

**It's here...  
Industrial Machinery  
AUCTIONS  
on the Internet!**

**Industry will never  
be the same.**

**AUCTIONS  
Machinery and Property  
-Plus-  
Machinery for Sale  
Businesses for Sale  
Commercial Real Estate  
RFPs and RFQs  
Employment  
Funding and Capital  
E-mail Notification Services**

**i-com  
industry**

**[www.i-comindustry.com](http://www.i-comindustry.com)**

Circle (201) on Free Info Card

# Now there's a conditional access system for everyone

M-Crypt, the essential start for small and large enterprises



We'd like to present a breakthrough in conditional access technology. It's called M-Crypt. And it's the only system that works as well with a few as with many subscribers.

M-Crypt comes on a single CD-ROM and runs on a desktop computer, just like any other Microsoft® Windows application. And more important, the M-Crypt modular approach allows you to grow your business, adding functionality and capacity at your own pace. Starting with basic subscription services for thousands of subscribers to pay per view and interactive services for large enterprises. It's up to you....

These are only some of the impressive M-Crypt benefits.

irdeto access  
A MINDPORT CONDITIONAL ACCESS CO.



## Audio consoles for broadcast

BY JOHN A. LUFF

Those of us, like myself, who entered this business through the lens and not the speaker have to work especially hard to understand the needs of the aural part of our medium. We need to remember that television is a two part medium. It has been said that television without audio could be surveillance, while radio without pictures could be opera. The changes in audio technology in the last 50 years have been every bit as stunning as they have been in the visual part of the medium, many of which parallel changes in video technology, and often have preceded those movement of

visual media.

Digital audio has been with us for a long time now. Compressed audio is ubiquitously available in consumer products. Thousands of radio stations have made their signals openly available on the Internet, and MP3 products allow playback of digital audio without moving parts in pocket players. Sophisticated audio processing tools, which began with analog reverb chambers, are now readily available to the designer in DSP-based products.

Broadcasters need to carefully analyze their audio needs before stepping into the showroom to buy the next

console. The products range from well under \$500, to well over \$500,000. Unlike video production for television broadcasting, audio may well have solid reasons for remaining analog for some time into the future. Today video switchers for analog signals would cost as much, or more, than digital products. Digital audio consoles for the same broadcast production facility are arguably still more expensive to implement in a system than their analog counterparts. The difference starts right at the microphone. Mics are inherently analog. Converting each microphone signal to digital takes

Company	Model	Analog or digital	Bit processing: internal and I/O	Time Delay Compensation	Max./Min. # Of Inputs	Surround-sound panning compatibility	Automation avail.	Free Info #
AMS Neve	Libra Live Series II	Digital	64 bit internal; 24 bits I/O	Yes	192/24	Yes	Yes	550
Arrakis	REV-12P	Digital	18 bit	No	24/12	No	Yes	551
	REV-12/18/24C	Digital	18 bit	No	48/18	No	Yes	552
Audioarts Engineering	D-700	Digital	32 bits internal; 24-bits I/O	No	32/1	No	Yes	553
Audio Technologies	BC6DSL	Analog	NA	NA	6	NA	NA	554
	BC12DSL	Analog	NA	NA	12	NA	NA	554
Audio Toys Inc.	Paragon II	Analog	NA	No	92/64	No	Yes	556
	Mini Paragon	Analog	NA	No	48/40	No	Yes	557
Harrison by GLW	Series Twelve	Both	40 bit internal; 24-bit I/O	Yes	576/24	Yes	Yes	558
	TV 5.1	Analog	NA	NA	60/12	Yes	No	559
Logitek	Numix	Digital	24 I/O	No	64/4	Available as option	Yes	561
Sennheiser	Innova-Son Sensory Grand Live Console	Digital	24 bits Internal; 20 bit I/O	Yes	72/48	No	Yes	562
Solid State Logic	Aysis Air	Digital	32 internal; 24 I/O	Yes	96/8	Yes	Yes	563
	Axiom-MT	Digital	32 Internal; 24 I/O	Yes	96/24	Yes	Yes	564
Soundcraft	B400/B800	Analog	NA	No	56/56	Yes	No	565
Soundtracs	DPCII	Digital	32 internal; 24 I/O	Yes	96/8	Yes	Yes	566
	DS3	Digital	32 internal; 24 I/O	Yes	96/8	Yes	Yes	567
Tascam	TM-D4000	Digital	24-bits internal; 24-bits I/O	Yes	36/36	Yes	Yes	568
Wheatstone	TV-1000	Analog	NA	No	Four Inputs per input module; no fixed number of input modules	Yes	Yes	569
Yamaha	PM1D	Digital	32 internal	Yes	192/48	Yes	Yes	570
	M2500	Analog	NA	No	56/24	No	No	571

# Inter BEE 2000

36th International Broadcast Equipment Exhibition

November 15-17, 2000 Nippon Convention Center (Makuhari Messe)



## Show that you're ready for a digital millennium

The International Broadcast Equipment Exhibition (Inter BEE) is one of the world's most important events for professional broadcast, video, and audio technologies.

Inter BEE 2000 will showcase the shift from analog to digital technologies as never before. You'll join more than 500 exhibitors and 30,000 industry members in celebrating a revolution in television and radio broadcasting. Additional features include new satellite broadcasting technologies and a host of multimedia and Internet solutions.

Many symposiums, forums, and seminars hosted by leading broadcasting, video, and audio software producers will help ensure a massive turnout.

You can't afford to miss the excitement at Inter BEE 2000. It's a truly unique opportunity to show that you're ready for a digital millennium.

For more information on Inter BEE 2000, contact:

### Japan Electronics Show Association

Sumitomo Shibadai-mon Bldg., 2 Gokan, 1-12-16, Shibadai-mon, Minato-ku, Tokyo 105-0012, Japan  
Fax.: +81-3-5402-7605 E-mail: [bee@jesa.or.jp](mailto:bee@jesa.or.jp) URL: <http://bee.jesa.or.jp/>



### Exhibition Categories

- Audio Equipment ● Cameras and Related Equipment
- Recording Equipment
- Editing and Production Equipment
- Electronic Displays ● System Conversion Equipment
- Output Systems ● Relay Systems
- Transmission Systems ● Lighting Equipment
- Measuring Equipment ● Transmission Cables
- Electronic Power Units ● HDTV Systems
- Satellite Broadcasting Systems ● Virtual Systems
- CG Production Systems ● DVD Systems
- Multimedia Systems ● Software
- Multiplex Broadcasting Systems ● Others



**CBS Audio Engineer Mary Cody at the AMS Neve Libra Live broadcast production console within CBS's control room #43 in its New York headquarters. Broadcasters should carefully consider their audio needs before purchasing an analog or digital console. Photo courtesy of AMS Neve.**

extra circuitry, though the cost of doing that has dropped tremendously. Here are some things to look for when making the root decision about buying an analog or digital console.

- Are you able to use mostly digital sources, like CD players, digital VTRs and servers, digital audio from satellite feeds, digital "carts" and cut players, phone interfaces?
- Do you use digital audio effects processing devices like reverbs, compressor limiters, gates, duckers, filter sets and noise reduction?
- Can you replace audio peripherals at the same time as replacing the audio console?
- Would the output of the console be feeding analog or digital devices before broadcast (master control switcher and STL, VTRs and servers)? Digital VTRs without digital inputs do not count as digital in this context. Some VTRs in use in news production can be equipped with AES as an option, but are not normally equipped that way at the factory.
- Is the console to be used for live, or post production or both? What about simply audio production and multi-track recording?
- If you plan post-production use, does the edit system provide control and with what protocol?
- Is there any economic benefit to improved quality beyond that you already produce? This is very hard to

prove.

- Will you be feeding a surround sound signal, or DTV transmitter in stereo?

If you think I loaded the dice to suggest you remain in analog audio you are wrong. There are plenty of very inexpensive, and quite capable and reliable, digital audio consoles that can work with both analog and digital inputs and outputs. Monday Night Football for HDTV was mixed on two consoles last year that cost a total of \$15,000, but yielded digital and analog I/O, surround sound mixing, moving faders, internal audio delays, effects, and more. But the broadcast specific production may require other features not common in such powerful, though somewhat niche products. They did not have mix minus capability for feeding back to talent earphones for instance. In the case of MNE, the internal delay functions solved a number of problems that would otherwise have required outboard delay lines for an analog only console solution.

Surround sound mixing presents special challenges for audio consoles. Panning the image around in six speakers is hard enough, but a live production with elements that come in as surround will present a special technical challenge. All six tracks must not be modified in time (which is affected directly by EQ settings), or

relative level. What happens to one track needs to happen to each one. Not many analog consoles will provide the necessary handles to make that work. Many digital consoles are set up to handle this easily. Remember that few currently available VTRs have six channels for recording, though multiplexing equipment to increase the number of channels is readily available. Also check the VTR to see if it can record AES "as a data stream."

Once you have listed the features you must have, carefully consider things like line inputs. Some inexpensive consoles still use unbalanced audio inputs for line and insert points, and often non-standard levels as well. You can buy a lot of console for a little money and end up spending a fortune to make it work right in your system. Flashing lights and moving faders do not mean much if the quality of your signal will be worse after conversion. If you need to mix a newscast ask about mix minus. Having a mix minus available for each input may seem like an extravagance, but it wouldn't be if you asked the journalist! For digital consoles you should ask just how long it takes to boot after a power failure, and how software is updated.

If the primary application is for post production consider special purpose consoles designed for editing environments. They include things like preview functions that mainline consoles will not have. But beware of the manufacturer that says he has a "serial edit interface", but does not specify the protocol(s) that are supported.

Lastly, if the installation is a new console in an existing system plan ahead. It will be much easier if you can prepare the existing plant for the new gear. Prefabricating the cabling to the new interface (which could well not be XLR connectors in many large consoles) will save loads of time. If you are implementing digital audio for the first time consider doing it on coax. Most equipment can accept BNC I/O now, and those devices that do not can be interfaced through baluns that adapt the 110Ω twisted pair to 75Ω unbalanced connections. ■

*John Luff is president of Synergistic Technologies Inc. in Camonsburg, PA.*

# 2000

 and beyond.....

## HDTV & 601

- Logo Inserter
- D to A Converter
- Down Converter
- Audio Embedder
- Test Generator
- Keyers

## POST PRODUCTION

- Film to Tape Transfer
- KeyLog Tracker
- 1080p/24
- 24 to 30Fps



## FIBER OPTICS

- Converters
- Multiplexers
- Splitters

## TIMECODE

- Master Clock
- Slave Clocks
- LTC to VITC
- D-VITC

## CLOSED CAPTIONING

## PARENTAL GUIDANCE

## WEB-TV

# evertz



Evertz Booth #L13261

Circle (203) on Free Info Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

[www.evertz.com](http://www.evertz.com)

1-905-335-3700

## Business highlights from broadcast and production

BY LAURA COLLINS, EDITORIAL ASSISTANT

**Belden's** electronic division installed over 4,000,000 feet of cable in the new Staples Center in Los Angeles. The majority of the cable connected the TV control rooms and routed digital audio/video signals within the 1 million-square-foot stadium.

The division also brought their high-performance networking cabling to **Panduit's** termination, management and identification products to produce the end-to-end system, Integrity Structured Cabling Solution.

ABC-affiliate WSHL-TV3 converted from 3/4" tape-based systems to a computer-based digital news production solution by **Vibrint**. The system includes applications for feed capture, nonlinear editing and playback.

**Acrodyne** recently added **Rohde & Schwarz** broadband solid state UHF and VHF digital television transmitters to the low, medium and high transmitters they already supply.



**Communications Engineering** designed, engineered and built WETA Washington, D.C.'s new digital TV and radio broadcast plant in Arlington, VA.

**ECHOLab** has changed its name to e-StudioLIVE to reflect its recent expansion into Internet broadcasting systems.

**EMCEE** announced that it will acquire **Advanced Broadcast Systems** in order to offer broadcasters low- to high-power digital transmitters.

**Avid** and **Ultimatte** reached an agreement to integrate Ultimatte's real time keyer technology into Avid's Symphony finishing system. This integration will allow Symphony users real time control over keying situations, especially blue-screen/green-screen compositing.

East Side Audio recently purchased a DPC-II digital console from **Sound-**



**tracs**. The 32-bit, 48-fader console will be used in East Side Audio's newly renovated Studio E.

CNN Interactive announced that it will use

**Virage** Interactive video infrastructure on its site, allpolitics.com. The service will enable users to search for televised speeches by presidential candidates by subject and keyword.

California production company Digi-Dog Studios installed **Otari's** Elite+ digitally controlled analog console to increase the studio's capabilities.

Otari also sold five of their Radar II hard disk recorders to Right Track Recording of New York.

**Dielectric Communications** constructed a new tower and transmitter for WWWB-TV's move to Louisville, as well as designing their antenna. The new transmitter is the most powerful of its kind in America and will boost the station's power to 5Mw.

**Chyron** will work with Microsoft to develop video graphics systems for Microsoft's TV platform, which enables content developers to offer consumers a new TV experience.

## ScreenShot

### Raycom Sports with Orad's IMadGINE covers college tournaments

Raycom Sports used Orad's IMadGINE virtual advertising systems for the Food Lion MVP Classic college tournament hosted by North Carolina in Charlotte, N.C., and the BB&T Classic tournament hosted by George Washington University and the University of Maryland at the MCI Center in Washington, D.C.

Advertisers' logos in both events were inserted into the keys at each end of the court using IMadGINE. The logos appeared as if they were painted onto the wood courts and were changed at half time. More frequent changes were avoided so viewers would not be distracted during the event.

IMadGINE allows for targeted advertising during live TV broadcasts by electronically replacing the peripheral boards in a sports stadium or inserting synthesized messages in empty places in the arena, facing obstacles such as diverse weather conditions and players blocking the physical space used for the insertion.

# A Breakthrough Of Remarkable Proportions



## Our Next Generation Scan Do Scan Converters Raise The Industry Standard. Again.

With the redesigned Scan Do<sup>®</sup> Pro II and new Scan Do Select, we've hatched two scan converters that offer egg-ceptional performance at an unbeatable price. Both maintain all the great user amenities and rugged dependability you've come to love, plus have these great features:

- True multi-scanning with support for resolutions to 1280 x 1024 (at 60Hz). So they'll work with virtually any computer.
- A remarkable 50% to 200% zoom with input zoom processing for enhanced resolution.
- An internal, universal power supply which eliminates the need for an external "brick."
- Advanced, three-line flicker reduction for the crispest, most stable images.
- RS-232 remote control for easy system integration and expansion.

Scan Do Select is the perfect presentation tool for boardrooms, meetings, training and videoconferencing applications. Scan Do Pro II has additional capabilities. Designed for top video and broadcast professionals, it features:

- Studio timeable genlock
- Component output (YUV and RGB formats)
- Switchable vertical filter
- Optional serial digital output (SDI)

Of course, both Scan Do Pro II and Scan Do Select are the epitome of user friendliness. They're simple to install, can be rackmounted and have easy-to-use, front-panel controls. Add a very reassuring three-year warranty on parts and labor, plus a great price, and you'll be scrambling to try one for yourself. For more information, including a printed or CD version of our catalog, contact us today.

 **Communications  
Specialties, Inc.**  
visioning the future ... Exceeding expectations

**WORLD HEADQUARTERS**  
Hauppauge, New York  
Tel: 631-273-0404 Fax: 631-273-1638  
www.commspecial.com  
Email: info@commspecial.com

**ASIA PACIFIC**  
Singapore Representative Office  
Tel: +65 293 0258 Fax: +65 293 1538  
www.commspecial.com  
Email: csiasia@commspecial.com

Scan Do is a registered trademark of Communications Specialties, Inc. ©2000 Communications Specialties, Inc.

Circle (204) on Free Info Card

See us at NAB Booth #M8968

www.americanradiohistory.com

**Harris Corporation** sold its TV antenna business to **Dielectric Communications**. The sale will enable Harris to focus on its core transmitter business and allow Dielectric to expand its antenna business.

National Mobile Television in Seattle ordered a 60-channel C2 analog mixing console from **Calrec** for installation in its Remote Vehicle Unit A9. The C2 will replace the Harrison TV - 3 currently in use.

Post production houses POP Film, POP Amination, Digital Magic and Riot are joining forces to form a Los Angeles-based, resource-rich media production center under the name R!OT. The full-service production and post production studio will offer telecine, editing, compositing, 3D animation, duplication, distribution and support services to clients from the advertising, music video, feature film, and entertainment and interactive television industries.

R!OT will operate as part of the Four Media Company division of the Encore Group, whose president is Larry Chernoff.

## People

Advanced Television Technology Center announced new officers for their board of directors. **Edward Cale-**

**ca**, senior vice president of technology and operations for PBS, replaced **Howard Miller** as chairman. **Philip Livingston**, vice president and strategic technical liaison for Panasonic Broadcast and Digital Systems Company, replaced **Dr. Robert Hopkins** as vice chairman.



**Dorrough**

NAB recently announced the following winners of its 2000 Engineering Achievement Awards: **Michael Dorrough** in radio engineering and **Max Berry** in television engineering. Dorrough is the founder of Dorrough Electronics. Berry was vice president of broadcast engineering for Capital Cities/ABC until his retirement in 1989.

**Steven Muni** was appointed channel manager for Leitch's United States sales operation.

The Advanced Authoring Format Task Force recently incorporated as AAF Association. Industry veteran and *Broadcast Engineering* writer **Brad Gilmer** was appointed executive director of the new association. Other

AAF board members include **David Dale** of Avid, **Andrew Oliphant** of the BBC, **Gordon Castle** of CNN, **Ian Gordon** of Discreet, **Gavin Schutz** of 4MC, **Alain Legault** of Matrox, **Tom McMahon** of Microsoft, **Laurin Herr** of Pinnacle, **Jon Pannaman** of Quantel, **Peter Dare** of Sony, **Clyde Smith** of Turner Entertainment Networks and **Steve Long** of the US National Imaging and Mapping Agency.




**Campbell**

**Guy Campbell** was elected president and a director of Andrew Corporation. Avid recently announced the following appointments: **Rob Kobrin** as the vice president of worldwide product marketing and **Mike Rockwell** as chief technology officer.



**Schwartz**

**Paul Schwartz** was appointed to the position of marketing communications coordinator for Otari Corporation. ■



### Inscriber RTX creates on-air timing for 2000 Winter Goodwill Games

Turner Broadcasting used Inscriber RTX for their broadcasts of the 2000 Winter Goodwill Games in Lake Placid. The RTX automation system by Inscriber was used to create on-air timing applications including running clocks, differentials, time to beat and split times. These applications appeared in events ranging from snowboard Super-G, bobsled and luge to downhill races, one of which was featured prominently in the first night's broadcast.



### Softimage DS produces promos for Winter X Games

White Iron Digital used Softimage DS by Softimage to produce the 2000 Winter X Games in Mount Snow, Vt., for ESPN. The post house was used to produce promos and bumpers for the 1999 Summer X Games in San Francisco and was chosen again for use in the Winter X Games because of its ability to meet tight deadlines, and because of the features it provided, including streaming capture, new compositing tools and editing enhancements. In the Winter X Games, it was used to create 30-second "personality pods" and two features, as well as high-impact bumpers.

# BSW

BROADCAST SUPPLY WORLDWIDE

## Advantage

## Audio Equipment for Broadcasters

- Best Price Guarantee
- Same Day Shipping
- Extended Hours
- Knowledgeable Sales Staff
- Flexible Terms

# Your Source for Professional Audio

Broadcast Supply Worldwide stocks the widest range of professional audio products suitable for the TV/Video industry. From the newest digital audio editing equipment to the finest lavaliere microphone, you'll find it at BSW at a great low price. We've been serving radio and TV broadcasters for over 25 years. Let our knowledgeable sales staff help you find the right equipment for the job, with quick delivery. Call us today.



**FREE**  
ProAudio Catalog  
Call BSW 800 426 8434

**NAB**  
The  
Convergence  
Marketplace  
**2000**

Come visit BSW at NAB booth #L6713 Video Hall.  
Check out the Audio Products on Display During  
Our Spectacular 4-Day Sale!

To Order Call BSW 1-800-426-8434  
or Visit [www.bswusa.com](http://www.bswusa.com)

# Windows to the Web



## www.folsom.com

**Folsom Research:** Folsom Research offers a complete line of scan converters, video format converters, scalars, and other image processing products. Our easy-to-navigate website features detailed product specifications, including downloadable files and articles. The site is continuously updated and is always full of new information. To get more information visit [www.folsom.com](http://www.folsom.com) or call toll free at 888-414-7226. Come see us at NAB 2000, Booth #M8532.



## www.rocketnetwork.com

**Rocket Network, Inc.** is the first and only company to provide Internet Recording Studios where audio professionals can meet online to collaborate and produce original audio from anywhere in the world. The Company's revolutionary network provides a cost-effective and convenient complement to traditional studios by reducing production expenses and increasing creative options for professional-quality audio in TV, film, radio, music and Websites.



## www.pinnaclesys.com

**Pinnacle Systems:** Pinnacle Systems' broadcast products give professionals the cutting edge tools needed to create dazzling productions faster and more affordably than ever before. These innovative digital video manipulation tools perform a variety of on-air, production, and post-production functions such as the addition of special effects, image management, capture, storage, and play-out, as well as graphics and title creation.



## www.commscope.com

**CommScope, Inc.** is the world's leading manufacturer of coaxial cable and specializes in precision twisted pair and optical transmission cables. CommScope provides the Audio/Video professional with over 30 years of experience in the manufacture of high performance transmission media.



## www.digibid.com

Upgrading equipment? Need to remarket the replaced equipment? Digibid provides a ready online marketplace of equipment buyers. Our online auction format makes it easy to sell your equipment.



## www.broadcastengineering.com

**Broadcast Engineering:** *Broadcast Engineering* is the only technology-driven online magazine in the industry. Its editorial environment delivers practical, informative articles on digital technology, systems integration, management, how-to installation, and systems and equipment maintenance. It is a package geared toward TV stations, cable/telcom, production, post-production, business TV, satellite and interactive television.

We're evolving.



Watch the transformation at

[www.mediacentral.com](http://www.mediacentral.com)

You've been with us from the beginning, but we've only just begun.

**mediaCentral**  
an illustriClick community

[www.mediacentral.com](http://www.mediacentral.com)

Your one-click resource for media tools, news and community.

# The GALLERY

## MATCH IT!!

**HENRY ENGINEERING**  
 503 Key Vista Drive  
 Sierra Madre, CA 91024 USA  
 TEL (626) 355-3656 FAX (626) 355-0077  
 FAX-on-Demand Doc #102 (626) 355-4210  
<http://www.henryeng.com>



*Twinmatch* is the "one-way Matchbox" that's perfect for matching unbalanced CD players and other "play-only" devices. There are *four channels* of -10 to +4 conversion, so you can match *two* stereo CD players with *one* Twinmatch! Direct-coupled circuitry and lots of headroom for absolute sonic transparency.



We Build Solutions.

Circle (207) on Free Info Card

Check out the *Broadcast Engineering* web site for career opportunities!  
[www.broadcastengineering.com](http://www.broadcastengineering.com)

## Design and Mix a Cable Channel with Revolutionary Multimedia Insertion Technology!

CURRENT TEMPERATURES	
Amsterdam	16°
Berlin	28°
Cairo	36°
Dallas	32°
Geneva	24°
Johannesburg	25°
London	29°
Los Angeles	31°
Munich	28°
New York City	27°
Nice	26°
Paris	24°
San Francisco	19°

multiple scalable windows for MPEG-2 and analog video

graphic overlay with transparency

vertically scrolling text or graphics

horizontally crawling text or graphics

to Rome and Venice. Call Travel Network now for current holiday packages

### fundamentals

See us at  
 NAB 2000  
 Booth M10127

- Concurrent display of analog video input and MPEG-2 video in scalable, movable windows
- Scalable, 24-bit graphics overlays with 256 levels of transparency
- Back-to-back MPEG audio/video playback with genlock for seamless ad insertion
- Hardware-assisted scrolling and crawling of multiple graphics windows
- NTSC/PAL composite video support, optional S-video support



SPECIALIZED TECHNOLOGY GROUP  
 A DIVISION OF 3DFX INTERACTIVE, INC.

1-888-478-2687  
[mypsales@3dfx.com](mailto:mypsales@3dfx.com)  
[www.stbstg.com](http://www.stbstg.com)

Single-slot PCI card • Supports multiple boards in a single system • Windows NT 4.0 support

**DVinci™** – The Professional Broadcast, Multi-Source Video and Graphics Mixer

Circle (208) on Free Info Card

Convert and Synchronize any Format to the Digital World

think conversion

*Designed to meet all hybrid conversion and synchronization applications, no digital facility is complete without the DFS-3005!*



- Decoder, TBC, ADC, Frame Sync, DAC, Encoder
- Audio ADC/DAC, Embedder, De-embedder
- Composite, Component, Serial Digital, Analog Audio, AES/EBU
- NTSC and PAL-B Support

think video®  
**LEITCH**

www.leitch.com  
U.S.A. (800) 231-9673 • Canada (800) 387-0233

Circle (211) on Free Info Card

PROFESSIONAL VIDEO CAMERA BATTERY

Introducing the.....

**NM PowerBrick™**

CAPTECH

"We Got The Power!"

**1/2 the Size....2/5 the Weight  
12% More Power**

- 65 Watt (industry standard NiCd brick is 60 Watt)
- 2.1 lb. (industry standard NiCd brick is 5.25 lb.)
- 14.4V / 4.5Ah
- Nickel Metal Hydride chemistry
- No Memory Problems- Memory free.
- Temperature sensor / microprocessor controlled charging circuit
- 1,000+ Charge Cycles
- Auto-reset Circuit Breaker
- Built-in auto-reset overload protection
- 30 day money back guarantee

Regularly \$499.95 Sale \$339.95

CAPITOL TECHNOLOGIES, INC.

**Toll-Free 1-877-630-8099**

http://www.captech.net Phone: 202-723-2278 Fax: 202-882-0192 Email: sales@captech.net

Circle (209) on Free Info Card

## DSNG Contribution Encoding



**envoy™**

THE DIGITAL VIDEO COURIER

- Integrated encoder and modulator
- Supports QPSK, 8PSK, 16 QAM
- Compact design

Visit us at NAB, booth #L11051

**WEGENER COMMUNICATIONS**

11350 Technology Circle  
Duluth, GA 30097 • 770-814-4000  
www.wegener.com

Circle (218) on Free Info Card

# Old-fashioned Perfection



State-of-the-Art Performance

The MicroFrame™

The space saving MicroFrame™ houses up to 16 modules, and dual regulators. The LA-1 line amp is a one-in, two-out DA. The MP-1 is a one-in, two-out mic-pre with 48 V phantom power. All state-of-the-art performance and priced to fit most anyone's budget... from Benchmark, of course! Visit our web site today.

1RU High Chassis  
Up to 16 Line Amps  
Up to 12 Mic-Preamps  
Redundant Power  
Mix Amp Option  
Connector I/O Options

*Benchmark*  
The measure of excellence!™

www.benchmarkmedia.com  
sales@benchmarkmedia.com

**BENCHMARK MEDIA SYSTEMS, INC.**  
Phone 800-262-4675, FAX 315-437-8119

Circle (213) on Free Info Card

The GALLERY

## DTMF/encoders



PK-1 \$71\* / PK-1K \$78\*  
W/Relay

**STEEL KEYS  
SEALED GOLD CONTACTS**

An ultra high quality DTMF Encoder for absolute reliability and function.

- Contacts are Water Proof/Dust Proof
- Completely Self Contained — No RFI
- Simple 3-Wire Connection • Output Level Adj.
- Wide Operating Range 5 to 16vdc
- Wide Temperature Range -22° to +160°F
- Supplied with instructions, Schematic, Template & Hardware

Call or Write for Free Catalog

VISA/AMEX  
\*Request Quantity Price



PK-2 \$76\* / PK-2K \$83\*  
W/Relay

**Mail Order To:**

**Pipo Communications**  
*Emphasis is on Quality & Reliability*

1516 Cassil Place  
Hollywood, CA 90028-7106  
Tel: 323-466-5444  
Fax: 323-466-1520

Circle (210) on Free Info Card

**Look At This!**  
Titles/Captions & Time/Date  
on Video



**SCT-50 \$329**

*Stand alone or RS-232 controlled "Industrial CG" adds titles, time, date, captions, etc., to your video.*

- Add up to 9 lines of 20 characters each of text, symbols. Time display can include tenths of seconds.
- Battery backed-up internal clock-calendar.
- Individual or group control of up to 99 units using single RS-232 PC port
- Included DOS "pop-up" screen editor is simple to use and maintains 100 separate screens.
- Change size, contrast, background, position, etc.

**Unconditional Guarantee**

**HORITA**

Post Office Box 3993  
Mission Viejo, CA 92690  
(949) 489-0240 www.horita.com

Circle (212) on Free Info Card

**Best Power**

UNINTERRUPTIBLE  
POWER SYSTEMS

From 250VA to 220kVA

&

**NORTH STAR  
TECHNICAL  
SERVICES**

*Power Protection  
Partners Serving  
the Broadcast  
Industry.*

Sales, service and  
battery  
replacement.

(800) 842-1671  
www.nstpower.com

Circle (214) on Free Info Card

## VIDEO D.A.'S

OVER 10,000  
WORLDWIDE



ES-207A  
\$175

**BROADCAST QUALITY**

- 1x4 • Gain • Adjustable
- Equalization-Compensates for 1000' of RG-59/U • Response-10 Hz to 10 MHz • Propagation Delay-3nS.

Many Other Audio & Video D.A.'s  
Including Rack Mount Versions

3 Year Warranty



310-322-2136  
FAX 310-322-8127  
www.esweb.com

Circle (220) on Free Info Card

ENG Microwave



Video Equipment

2.0 & 2.5 GHz Bands

FCC TYPE ACCEPTED

Video Links  
Tower Cams  
Weather Networks  
Repeaters

For a Free Catalog

Call 888-819-4877



6570-B East 51<sup>st</sup> Street,  
Tulsa, OK 74145

Visit <http://www.tron-tek.com>

Email: [tron@ionet.net](mailto:tron@ionet.net)

Circle (219) on Free Info Card



Something **BIG**  
is Happening  
at **UTAH**

Find Out at NAB Booth #L2027

Circle (221) on Free Info Card



# MIX Presents Studio Pro 2000

Audio Production for Music, Broadcast and the Web

June 12-13, 2000

New York Hilton & Towers, New York City

**NEW THIS YEAR!** StudioPro2000 Workshops on Surround Sound Production, Web Audio Production and Workstation Production.

Moderators and workshop leaders include: Dan Daley, Phil De Lancie, Charles Dye, Bob Hodas, Mel Lambert, George Petersen and Tony Visconti, with others to be announced.

**If you attend only one conference this year, make it StudioPro2000!**

Request your conference information and registration materials today! Register online at [www.mixonline.com](http://www.mixonline.com), or contact Robert Irwin by TEL: (510) 653-3307, FAX: (510) 653-5142, or E-mail: [robert\\_irwin@intertec.com](mailto:robert_irwin@intertec.com).

## 8 GREAT SEMINARS!

- Putting Music on the Web
- Multichannel Sound for DTV
- The Future of Music Delivery: DVD-Audio, SACD and the Web
- Beyond Sneaker-Net: Network-Based Production
- What Are You Mixing Through...and Why?
- Getting in Sync: Digital Systems and Interfacing
- Studio Design: Case Studies in Setting Up for Surround
- Studio Business: New Technologies, New Opportunities

## PLUS, TWO VERY SPECIAL LUNCHEON FORUMS

- June 12: Music Producers Forum (Sponsored by Quantegy; Presented by the New York Chapter of the Recording Academy)
- June 13: The Changing Sound of Television: From Stereo to Digital Surround (Sponsored by Dolby)





# THE PROFESSIONAL'S SOURCE FOR PHOTO,

FOR ORDERS CALL: **800-947-9928** OR FAX (24 HOURS): **800-947-9003**  
**212-444-5028** **212-444-5001**

**MOST ORDERS SHIPPED WITHIN 24 HOURS**  
**OVERNIGHT SERVICE AVAILABLE**

On the Web: <http://www.bhphotovideo.com>

## Anton Bauer HyTRON 50 Battery

Weighting a mere 3.1oz (88g) grams and packing 50 Watt-hours of energy - enough to operate a typical ENG camcorder for two hours - the HyTRON 50 is the most advanced lightweight battery in the industry.

- Made possible by recent advancements in a cell technology originally designed for the mobile computing industry, it incorporates nickel metal hydride cells that provide the highest energy density of any rechargeable cylindrical cell available. High performance is further assured through the integration of Anton/Bauer InterActive digital technology.
- Equipped with an on-board "fuel computer" which monitors energy input and output as well as critical operating characteristics and conditions. This data is communicated to the InterActive charger to ensure safety and optimize reliability.
- In addition, remaining battery capacity information is available by means of an LCD display on each battery and in the viewfinder of the most popular broadcast & professional camcorders.
- Special low voltage limiter prevents potentially damaging over-discharge.

**Specifications:** 14.4 V, 50 WH (Watt Hours)  
 5-3/4" x 3-1/2" x 2-1/4" 1.9 lbs (88kg)  
 Typical runtime 2 hours @ 25 Watts 3 hours @ 17 Watts

### QUAD 2702/2401

#### Four-Position Power/Chargers

The lightest and slimmest full featured four position chargers ever they can fast charge four Guin Mount batteries and can be expanded to charge up to eight! They also offer power from any AC main in a package the size of a notebook computer and weighing a mere four lbs! The 40 watt 2401 can charge ProPacs in two hours and TripPacs in one. Add the Diagnostic Discharge module and the QUAD 2401 becomes an all purpose power and test system. The 70 watt QUAD 2702 has the module and is the ultimate professional power system.

## Steadicam Video SK2

Incorporating the same design principles as its larger Oscar and Emmy winning Steadicam cousins, the Video SK 2 is designed for cameras weighing from 9-19 lbs. Far more compact and less complex, the complete SK2 system - sled, stabilizer arm and vest - weighs a mere 21 lbs and fits neatly into the trunk of a car.

Balancing is easier than ever and a single battery operates both camera and Steadicam. In fact, the SK2 is the only Steadicam Simple enough to be operated without workshop training. A comprehensive instructional video will have you up and running in hours. But make no mistake, the lightweight Video SK2 performs like a true heavyweight.

Shoot on the move effortlessly, without cranes, booms or dollies. The sled-mounted monitor offers a crystal-clear picture, so your eyes are no longer glued to your camera's eyepiece. And with the weight spread comfortably over your torso you can shoot on the run, climbing stairs or even from a moving vehicle. With one smooth tracking shot capture what used to require five or six setups. An optional low-mode bracket can further enhance your creativity. Whether you shoot commercials, industrials or documentaries, the SK2 lets you offer more flexibility than ever before. If you can imagine a shot, you can shoot it more efficiently, more economically and more creatively than with any other other equipment.

## GLIDECAM

### V-16 AND V-20

#### Camera Stabilization Systems

The V-16 and V-20 allow you to walk, run, go up and down stairs, shoot from moving vehicles and travel over uneven terrain without any camera instability or shake. The V-16 stabilizes cameras weighing from 10 to 20 pounds and the V-20 from 15 to 26 pounds. They are both perfect for shooting the type of ultra-smooth tracking shots that take your audience's and client's breath away, instantly adding high production value to every scene. Whether you are shooting commercials, industrials, documentaries, music videos, news, or full length motion pictures, the Glidecam "V" series will take you where few others have traveled.

## sachtler Tripods and Fluid Heads

### DV Systems—Digital Support for Every Budget

Today's compact digital cameras require light, fast and highly versatile camera support systems. Starting from the DV2 all the way up to the DV12 Sachtler has a solution tailored for just about every conceivable digital camera package available today. All feature Sachtler's patented counterbalance system and Touch and Go wedge plates. And all except the DV2 feature sliding camera platform to ease in the balancing of your camera.

#### DV2 System

- The smallest head of the Sachtler's line
- Sachtler Touch and Go quick release with automatic camera lock and safety lever/drop protection
- One step of dynamic counterbalance
- Frictionless leak proof fluid damping with one levels of drag
- Vibrationless vertical/horizontal brakes
- Built in bubble for horizontal leveling
- Single Stage 75mm tripod DA 75 Long
- Lightweight floor spreader: SP 75

**This system (0210) consists of:**  
 Fluid Head (DV-2), Long Tripod (DA 75), floor spreader (SP 75)

#### DV4 System

- Sliding balance plate
- Touch and Go quick release with automatic camera lock and safety lever/drop protection
- One step of dynamic counterbalance
- Frictionless leak proof fluid damping with one levels of drag
- Vibrationless vertical/horizontal brakes
- Built in bubble for horizontal leveling
- Single Stage 75mm long tripod DA 75
- Lightweight floor spreader: SP 75

**DV4 System (0410) consists of:**  
 Fluid Head (DV-4), Long Tripod (DA 75), floor spreader (SP 75)



#### DV4X2 System

Same as the DV4 PLUS —

- Five step of dynamic counterbalance
- Five step of vertical and horizontal drag

**DV4X2 System (0610) consists of:**  
 Fluid Head (DV-6), Long Tripod (DA 75), floor spreader (SP 75)

#### DV8 System

Same as DV6 PLUS — Greater load capacity

**DV8 System (0810) consists of:**  
 Fluid Head (DV-8), Long Tripod (DA 75), floor spreader (SP 75)

#### DV12

Same as DV8 PLUS — Greater Load Capacity • Fits 100mm tripods

## QTV

### 15" and 17" On Camera Promoters

The 15" and 17" On Camera promoter is the industry standard and designed for use with any camera, for any application. The high contrast, high resolution monitor, created by QTV, is the result of state of the art components and design. The monitor permits a much greater degree of tilt because of its cutaway feature. Its VPS Eyeline feature superimposes copy over the camera lens, enabling the reader to maintain a drum eye-to-eye contact. It's easy and comfortable to read. QTV's On Camera promoter will make sure the talent has clear access to the promoter. The 17" model has a viewing area of 123 sq. inches, 39" more than the 15" model. The 15" On Camera promoter is also available in a free standing pedestal model, which can be utilized both in the studio and in remote situations.

#### MVP-12

The MVP-12 incorporates QTV's latest design technology for studio and EFP prompting. The MVP-12 features the most advanced circuitry for a promoter of this size. Fully self-contained, it offers high brightness and high resolution that ensures unmatched ease of readability for the speaker. The MVP-12 is powered by AC or DC current utilizing the Sony

#### MVP-9 Mini Videoprompter

The MVP-9 mini videoprompter is designed for use with smaller cameras and small spaces. The same level of performance is achieved as the larger CRT based units but in a smaller configuration that is powered by AC or DC current (as above). Created for the new generation of smaller, lighter



## SONY

### PVW-2600/PVW-2650/PVW-2800

#### Betacam SP Pro Series

Whenever versatility and no compromise performance is needed, there is only one choice. Legendary reliability and comprehensive support for its many users has established the PVW series as the standard in broadcast and post production. The PVW Series includes the PVW-2600 Player, PVW-2650 Player with Dynamic Tracking and the PVW-2800 Editing Recorder. They feature built-in TBCs, LTC/VITC time code operation and RS-422 serial interface. They also offer composite, S-Video and component video inputs and outputs. Most important they are built for heavy, every day duty.


- Built-in TBC's and digital dropout compensation assure consistent picture performance. Remote TBC adjustment can be done using the optional BVR-50 TBC Remote Control.
- The PVW-2600, PVW-2650 and PVW-2800 (generates as well) read VITC/LTC time code as well as User Bits, Exit/In time code, Regen/Preset, or Rec-Run. Free-Run selections.
- Built-in character generator displays time code or CTL data.
- Set-up menu for presenting many functional parameters.
- Two longitudinal audio channels with Dolby C-type NR.
- Recognizable monochrome pictures at up to 24X normal speed in forward and reverse. Color at speeds up to 10X.
- Two types of component connection, three BNC connectors or a Betacam 12-pin dual connector. They have composite and S-Video signals as well.
- Dynamic Tracking (DT) playback from -1 to +3 lines normal speed.
- Built-in comprehensive editing facilities.
- Dynamic Motion Control with memory provides slow motion editing capability.

**PVW-2650 Only**

- Dynamic Tracking (DT) playback from -1 to +3 lines normal speed

**PVW-2800 Only**

- Built-in comprehensive editing facilities.
- Dynamic Motion Control with memory provides slow motion editing capability



### 800 SERIES UHF WIRELESS MICROPHONE SYSTEMS

Consisting of 5 handheld and bonypack transmitters and 6 different receivers, Sony's UHF is recognized as the outstanding wireless mic system for professional applications. Operating in the 800 MHz band range, they are barely affected by external noise and interference. They incorporate a PLL (Phase Locked Loop) synthesized control system that makes it easy to choose from up to 282 operating frequencies, and with the use of Sony's pre-programmed channel plan, it is simple to choose the correct operating frequencies for simultaneous multi-channel operation.

Additional features, like Space diversity reception, LCD indicators, reliable and sophisticated circuit technology ensure low noise, wide dynamic range and extremely stable signal transmission and reception. Ideal for broadcasting stations, film production facilities, and ENG work.



### PROFESSIONAL VIDEO TAPES

QUICK DIAL 71	Professional Grade VHS	
PG-30	2.39	PG-60 2.39 PG-120 .2.
Broadcast Grade VHS Box		
BGR-30	3.29	BGR 60 3.99 BGR-120 .4.
H471S S-VHS Double Coated		
ST-30	6.69	ST 60 7.49 ST-120 7.
M221 Hi 8 Double Coated		
Metal Particles Metal Evaporated		
P630HMP	4.99	E630HME 7.
P660HMP	6.29	E660HME 10.
P6120HMP	8.29	E6120HME 13.
M321SP Metal Betacam (Box)		
05S	11.99	10S 12.49 20S 12.1
30S	14.99	60L 24.95 90L 39.1
DP121 DVC PRO		
12M (Med.)	7.49	23M 8.79 33M 10.1
63M	19.99	64L (L.Q.) 22.1
94L	30.99	123L 39.1

### maxell Hi8 Metal Particle (XRM)

Broadcast Quality Hi8 Metal Particle	
P6-30 HM BO	5.39
P6-120 HM BO	7.1
PA PLUS VHS	
T-30 Plus	1.69
T-120 Plus	2.19
MGX-PLUS VHS (Box)	
HGXT-60 Plus	2.69
HGXT-160 Plus	3.1
BQ Broadcast Quality VHS (Box)	
T-30 BQ	3.89
BQ Professional S-VHS (In Box)	
ST-31 BQ	6.79
ST-126 BQ	7.45
Betacam SP	
B30MSP	13.49
B60MLSP	19.99
B90MLSP	29.1

### Panasonic

Mini DV Tape	
AY-DVM-30	6.49
AY-DVM-60	7.99
AY-DVM80	12.99
DVCPRO	
AJ-P12M (Medium)	6.99
AJ-P33M	11.19
AJ-P66L (Large)	20.99
AJ-P126L	38.9
Hi-8 Professional Metal Video Cassettes	
P6-30 HMPX	4.59
P6-60 HMPX	6.49
P6-120HMPX	8.49
PR Series Professional Grade VHS	
T-30PR	2.39
T-60PR	2.59
T-120PR	2.7
PM Series Premier Grade Professional VHS	
T-60PM	3.9
BA Series Premier Hi-Grade Broadcast VHS (In Box)	
T-30BA	3.59
MQ Master Quality S-VHS (In Box)	
MOST-30	7.49
MOST-60	7.79
MOST-120	7.9
BRS 3/4" U-matic Broadcast Standard (In Box)	
KCS-10 BRS (mm)	8.69
KCS-10 BRS	8.9
KCA-20 BRS	8.19
KCA-30 BRS	9.60
XBR 3/4" U-matic Broadcast Master (In Box)	
KCS-10 XBR (mm)	8.79
KCA-10 XBR	9.29
KCA-30 XBR	11.99
KSP 3/4" U-matic SP Broadcast (In Box)	
KSP-10 (mm)	9.59
KSP-10	10.09
KSP-30	12.99
BCT Metal Betacam SP Broadcast Master (Box)	
BCT-5M (small)	12.29
BCT-20M (small)	13.29
BCT-30M (small) (50 Pack)	ea. 13.4
BCT-30ML	18.99
BCT-60ML	21.9
BCT-90ML	27.9
Mini DV Tape	
DVM-30EXM No Chip	12.99
DVM-60EXM No Chip	11.99
DVM-30PR No Chip	7.99
DVM-60PR No Chip	9.9
Full Size DV Tape with Memory Chip	
DV-120MEM	24.99
DV-180MEM	26.9
PDV Series Professional DVCAM Tape	
PDVM-12ME (Mini)	15.25
PDVM-32ME (Mini)	16.99
PDV-94ME (Standard)	33.49
PDV-184ME (Standard)	44.95
PDVN-124N	31.95

# VIDEO and PRO AUDIO



TO INQUIRE ABOUT YOUR ORDER:  
 800 221-5743 • 212 239-7765  
 OR FAX 24 HOURS:  
 800 947-2215 • 212 239-7549

**New Address:**  
 420 Ninth Ave. (Bet. 33rd & 34th St.)  
 New York, N.Y. 10001

## FUJINON ENG LENSES



While ENG camera technology evolves faster and faster, delivering ever higher performance in ever smaller bodies, it has been increasingly difficult for lens manufacturers to improve quality while keeping size and weight to a minimum. Recently, with Aspheric technology (A12) Fujinon has succeeded in manufacturing superior quality lenses that are both smaller and lighter than lenses of conventional spherical design. From the widest angle to the ghost light photo, Fujinon's broadcast hand-held style lenses offer unparalleled features and performance. In fact, they are so advanced and so optically superb they will reshape your thinking about how well a lens can perform.

Fujinon's broadcast hand-held lenses feature the very latest in optical and mechanical design, and manufacturing techniques. New EBC (Electron Beam Coating) reduces flare and improves contrast, while AT2 Aspheric Technology improves corner resolution and reduces chromatic aberration. And all except the 36:1 Super Telephoto offer the exclusive "V-Grip" and Quick Zoom.

**A15X8EVM Standard Zoom Lens**  
 A versatile performer in a compact package, offers AT2, inner focus, Quick Zoom and the "V-Grip" ..... 7495.95

**A20X8EVM Standard/Telephoto Zoom Lens**  
 Combines additional focal length with AT2, inner focus, Quick Zoom and the "V-Grip" ..... 11,499.95

## CHYRON PC-CODI & PC Scribe

### Text and Graphics Generator and Video Titling Software

PC-CODI incorporates a broadcast quality encoder and a wide bandwidth rear keyer for the highest quality, realtime video character generation and graphics display. A video graphics software engine running under Windows 95/NT. PC Scribe offers a new approach and cost effective solution for composing titles and graphics that is ideal for video production and display applications. Combined, they are the total solution for realtime character generation with the quality you expect from Chyron.



**PC-CODI Hardware:**  
 Fully-animated displays • Display and non-display buffers  
 Less than 10 nanosecond effective pixel resolution  
 16.7 million color selections • Fast, realtime operations  
 Character, Logo and PCX image transparency  
 Variable edges: border, drop shadow and offset  
 Full position and justify control of character and row  
 User-definable inter-character spacing (squeeze & expand)  
 Multiple fill crawl speeds • Automatic character kerning  
 User-definable tab/template fields  
 Shaded backgrounds of variable sizes and transparency  
 Software-controlled video timing

- User-definable read effects playback: wipes, pushes, fades
- NTSC or PAL sync generator with genlock
- Board addressability for multi-channel applications
- Auto display sequencing • Local message/page memory
- Preview output with safe-title/cursor/menu overlay
- Composite and S-video input with auto-genlock select


**PC-Scribe Software:**  
 Multiple preview windows can be displayed simultaneously.  
 Transitions effects include: cut, fade, push, wipe, reveal, peel, zoom, matrix, wipe, spiral, split, weave and jitter.  
 Import elements to build graphics. This includes OLE objects, INFANIT! RGBA and TGA with alpha channel. Scribe also imports and exports TIFF, JPEG, PCX, TGA, BMP, GIF, CLP, ASCII, IMG, SGI, PICT and EPS formats.

- Multiple preview windows can be displayed simultaneously.
- Transitions effects include: cut, fade, push, wipe, reveal, peel, zoom, matrix, wipe, spiral, split, weave and jitter.
- Import elements to build graphics. This includes OLE objects, INFANIT! RGBA and TGA with alpha channel. Scribe also imports and exports TIFF, JPEG, PCX, TGA, BMP, GIF, CLP, ASCII, IMG, SGI, PICT and EPS formats.

PC-CODI and PC-Scribe Bundle ..... 2995.00

## KNOX VIDEO

### RS4x4/8x8/16x16/16x8/12x2 Video/Audio Matrix Routing Switchers

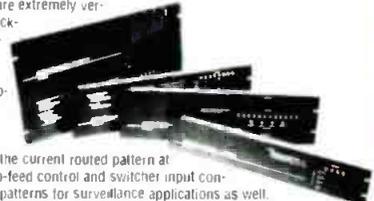

Knox's family of high performance, 3-channel routing switchers are extremely versatile, easy-to-use and very affordable. Housed in an ultra-thin rack-mount chassis they accept and route (on the vertical interval) virtually any video signal, including off-the-air and non-timebase corrected video. They also route balanced or unbalanced stereo audio. The audio follows the video or you can route the audio separately (breakaway audio). Each of the switchers offers manual control via front panel operation. They can also be controlled remotely by a PC, a Knox RS Remote Controller, or by a Knox Remote Keypad via their RS-232 port. Front panel LEDs indicate the current routed pattern at all times. Knox switchers are ideal for applications such as studio-feed control and switcher input control, plus they have an internal timer allowing timed sequence of patterns for surveillance applications as well.

- Accept and routes virtually any one-voice NTSC or PAL video signal input to any of all video outputs
- Accept and route two-voice mono or stereo unbalanced audio inputs to any of all audio outputs
- Video and audio inputs can be routed independently, they don't need to have the same destination.
- Can store and recall preset cross-point patterns. (Not available on RS12x2.)
- Front panel key-pad operation for easy manual operation.
- Can also be controlled via RS-232 interface with optional RS Remote Controller or Remote Keypad.
- Front panel LED indicators display the present routing patterns at all times.
- An internal battery remembers and restores the current pattern in case of power failure.
- Internal vertical Interval switching firmware allows on-air switching
- Housed in a thin profile rackmount "T" chassis.
- Also except the RS12x2 are available in S-video versions with/without audio.
- Models RS16x8 and RS16x16 are also available in RGB component version
- With optional Remote Video Redout, the RS16x8 and RS16x16 can display active routes on a monitor at remote locations, via a composite signal from a BNC connector on the rear panel.
- The RS4x4, RS8x8 and RS16x16 are also available with balanced stereo audio. They operate at 660 ohms and handle the full range of balanced audio up to +4 dB with professional quick-connect, self-locking, bare-wire connectors.

## LEADER

Manufacturing test and measurement equipment for over 40 years. Leader Instruments is the standard which others are measured against for reliability, performance, and most important—cost effectiveness.



### 5860C WAVEFORM MONITOR

A two-input waveform monitor, the 5860C features 1H, 1V, 2H, 2V, 1 s/div and 2V mag time bases as well as vertical amplifier response choices of flat, IRE (low pass), chroma and DIF-STEP. The latter facilitates easy checks of luminance linearity using the staircase signal. A PIX MON output jack feeds observed (A or B) signals to a picture monitor, and the unit accepts an external sync reference. Built-in calibrator and on-off control of the DC restorer is also provided.

### 5850C VECTORSCOPE

The ideal companion for the 5860C, the 5850C adds simultaneous side-by-side waveform and vector monitoring. Featured is an electronically-generated vector scale that precludes the need for fussy centering adjustments and eases phase adjustments from relatively long viewing distances. Provision is made for selecting the phase reference from either A or B inputs or a separate external timing reference.

### 5100 4-Channel Component / Composite WAVEFORM

The 5100 handles three channels of component signals, plus a fourth channel for composite signals, in mixed component / composite facilities. Features are overlaid and parade waveform displays, component vector displays, and automatic bow-tie or "shark fin" displays for timing checks. Menu-driven options select format (525/60, 625/50, and 1125/60 HDTV), full line-select, vector calibration, preset front-panel setups and more. On-screen readout of scan rates, line-select, preset numbers, trigger source, cursor time and volts.

### 5100D Digital Waveform/Vectorscope

The 5100D can work in component digital as well as component analog facilities (and mixed operations). It provides comprehensive waveform, vector, timing and picture monitoring capabilities. Menu driven control functions extend familiar waveform observations into highly specialized areas and include local calibration control, the ability to show or blank SAV/EAV signals in both the waveform and picture, the ability to monitor digital signals in GBR or YCbCr form, line select (with an adjustable window), memory storage of test setups with the ability to provide on-screen labels, flexible cursor measurements, automatic 525/60 and 625/50 operation and much much more.

### 5870 Waveform/Vectorscope w/SCH and Line Select

A two-channel Waveform/Vector monitor, the microprocessor-run 5870 permits overlaid waveform and vector displays, as well as overlaid A and B inputs for precision amplitude and timing/phase matching. Use of decoded R-Y allows relatively high-resolution DG and DP measurements. The 5870 adds a precision SCH measurement with on-screen numerical readout of error with an analog display of SCH error over field and line times. Full-raster line select is also featured with on-screen readout of selected lines, a strobe on the PIX MON output signal to highlight the selected line, and presets for up to nine lines for routine checks.

### 5872A Combination Waveform/Vectorscope

All the operating advantages of the 5870, except SCH is deleted (line select retained), making it ideal for satellite work.

### 5864A Waveform Monitor

A two-input waveform monitor that offers full monitoring facilities for cameras, VCRs and video transmission links. The 5864A offers front panel selection of A or B inputs, the choice of 2H or 2V display with sweep magnification, and flat frequency response or the insertion of an IRE filter. In addition, a switchable gain boost of X4 magnifies setup to 30 IRE units, and a dashed graticule line at 30 units on screen facilitates easy setting of master, pedestal, intensity and focus are fixed and automatic for optimum display. Supplied with an instruction manual and DC power cable.

### 5854 Vectorscope

A dual channel compact vectorscope, the 5854 provides precision checkout of camera encoders and camera balance, as well as the means for precise genlock adjustments for two or more video sources. Front panel controls choose between A and B inputs for display and between A and B for decoder reference. Gain is fixed or variable, with front panel controls for gain and phase adjustments. A gain boost of 5X facilitates precise camera balance adjustments in the field. Supplied with a DC power cable.

Designed for EFP and ENG (electronic field production and electronic news gathering) operations, they feature compact size, light weight and 12 V DC power operation. Thus full monitoring facilities can be carried into the field and powered from NP-1 batteries, battery belts and vehicle power. Careful thought has been given to the reduction of operating controls to facilitate the maximum in monitoring options with the operating simplicity demanded in field work.

## TRUEVISION/Avid

### Professional Video Production Workstation

Incorporating the award-winning TARGA 1000 video card and Avid MCXpress NT non-linear editing software, this fully-configured workstation meets the needs of production professionals, corporate communicators, educators and Internet authors.

**TARGA 1000 Features:**  
 The TARGA 1000 delivers high processing speed for video and audio effects, titling and compositing. Capture, edit and playback full-motion, full-resolution 60 fields per second digital video with fully synchronized CD-quality audio.  
 Compression can be adjusted on the fly to optimize for image quality and/or minimum storage space. Has composite and S-video inputs/outputs. Also available with component input/output (TARGA 1000 PRO).

**MCXpress Features:**  
 The ideal tool for video and multimedia producers who require predictable project throughput and high-quality results when creating video and digital media for training, promotional marketing material, local television and cable commercials, CD-ROM and Internet intranet distribution. Based on Avid's industry-leading technology, it combines a robust editing functionality with a streamlined interface. Offers integration with third-party Windows applications, professional editing features, powerful media management, title tool and a plug-in effects architecture. It also features multiple output options including so you save time and money reusing media assets across a range of video and multimedia projects.

### TARGA 1000/MCXpress Turnkey Systems:

- 300-watt, 6-Bay full tower ATX chassis
  - Pentium ATX motherboard with 512K cache
  - Pentium II- 450 MHz Processor
  - Matrox Millennium II AGP 4MB WRAM display card
  - 128MB SDRAMs 168-Pin (DIMM) S-DRAM
  - IBM 105B IDE System Drive
  - Seagate Barracuda External 9.1GB SCSI-3 ultra-wide capture drive
  - Adaptec 54A-2940U2W Ultra Wide SCSI-3 controller card
  - Teac CD-532e 32X EIDE internal CD-ROM drive • 3.5" floppy drive
  - Altec-Lansing ACS-48 3-piece deluxe speaker system
  - Viewsonic G771 17" (1280 x 1024) monitor (0.27mm dot pitch)
  - Microsoft MS Mouse • Focus 2001A keyboard
  - Avid MCXpress for Windows NT • Windows NT 4.0 operating system
  - Truevision TARGA 1000 or 1000 Pro Video Capture Card
- With TARGA 1000 ..... \$5995.00  
 With TARGA 1000 Pro (component Input/Output) ..... \$6495.00



CORPORATE ACCOUNTS WELCOME

# Professional Services

**GILMER & ASSOCIATES, INC.**  
TECHNOLOGY / MANAGEMENT CONSULTANTS

**BRAD GILMER**  
PRESIDENT

2207 RINGSMITH DR  
ATLANTA, GA 30345  
TEL (770) 414-9952  
FAX (770) 493-7421  
EMAIL: bgilmer@atlnet.com

**JOHN H. BATTISON P.E.**  
**CONSULTING BROADCAST ENGINEER.**  
FCC APPLICATIONS AM, FM, TV, LPTV  
Antenna Design, Proofs, Fieldwork  
2684 State Route 60 RD #1  
Loudonville, OH 44842  
419-994-3849 FAX 419-994-5419

video, audio, & automation electronics  
serving manufacturers & systems integrators

**electronics R & D  
& custom product design**

**BARANTI GROUP INC**  
Professional Engineers  
Ontario

phone (905) 479-0148  
fax (905) 479-0149

**D.L. MARKLEY**  
& Associates, Inc.  
**CONSULTING ENGINEERS**  
2104 West Moss Ave.  
Peoria, Illinois 61604  
Phone (309) 673-7511 • FAX (309) 673-8128  
www.dlmarkley.com  
Member AFCCE

**NETCOM**  
STATE OF THE ART ENGINEERING  
FOR AUDIO AND VIDEO  
ENGINEERING DESIGN • CAD DRAFTING SERVICES  
CABLE FABRICATION • PRE-WIRED PATCH PANEL RACKS  
SYSTEM INSTALLATIONS • EQUIPMENT SALES  
**(201) 837-8424**  
FAX (201) 837-8484  
1865 PALMSIDE AVE. ITANECK, NJ 07046

**"NAME YOUR OWN PRICE  
ON DUPLICATIONS"**  
AUDIO • VIDEO • CD-ROM • DVD • DISK  
Any Quantity  
**WWW.QUOTEIT.COM**  
"The First On-Line  
Name Your Own Price Web Site"  
A division of QuikBiz Internet Group, a publicly traded company.

# Classifieds For Sale

**STUDIO EXCHANGE** [www.studio-exchange.com](http://www.studio-exchange.com)  
Phone -818-840-1351  
Fax -818-840-1354

*Broadcast Video Equipment — NEW & USED*  
**- Experts in System Integration -**

<b>Buy</b>	<b>Sell</b>	<b>Trade</b>	<b>List</b>	<b>V-Bay Auction</b>	<b>On-line Store</b>
------------	-------------	--------------	-------------	--------------------------	--------------------------

*Sony Products Specialists!* **SONY**

Circle (243) on Free Info Card

**Shopping for Equipment?**  
Before you pay too much...check [www.digibid.com](http://www.digibid.com)

**digibid.com**  
Industry Auction Network

**The Internet Auction Marketplace  
Best Deals On the Planet!**

Circle (244) on Free Info Card

**BROADCAST PRODUCTS**

**BECK ASSOCIATES**

16024 Central Commerce Dr.,  
Austin, TX 78660  
1-888-422-8600  
FAX: (512) 670-4390

**NEW!!**

**AESIO Digital/Audio Converter Panel**  
Provides simple conversion between 110 ohm and 75 ohm audio signals transformer coupled. BNC connectors for 75 ohm coax connections. Removable terminal block connectors for 110 ohm paired audio cable. 32 positions. Two rackunits (3.5"). **\$1,245**

**TBC-RMT - TBC Remote Control Unit**  
Remote control of up to 3 TBC's. For use with JVC, Panasonic and Sony. Purchased with 1, 2, or 3 modules. With 3 modules..... **\$960**

**SCR-4X8-Serial Machine Control Router**  
Input/Output Twelve rear mounted DB9-F connectors (four controllers, eight devices). EIA RS-422 send and receive. Controls: Twelve lighted pushbuttons for channel assignment..... **\$1,080**

**SCP-10-Serial 422 Patch Panel 10 x 10**  
passive non-normalizing serial data patch panel. Two rack units high. Legend strips and 10 patch cards included..... **\$400**

Circle (245) on Free Info Card



**AcousticsFirst**  
Toll-Free Number: **888-765-2900**  
Full product line for sound control and noise elimination.  
Web: <http://www.acousticsfirst.com>

**NEW EQUIPMENT AT WHOLESALE!**  
<http://www.advancedvideosystems.com> 6,000 sale prices on line! Factory authorized for 60 makes! Factory sealed new full warranty. **ADVANCED VIDEO SYSTEMS (800) 233-2430.**



**get into gear**  
Advertise your product or service in the **Broadcast Engineering Classifieds!**

## Rates

Advertising rates in Broadcast Engineering are 146<sup>00</sup> per column inch, per insertion, with frequency discounts available. There is a one inch minimum.

Ads may also be purchased By-The-Word for \$2.25 per word, per insertion. Initials and abbreviations count as full words. Minimum charge is \$45<sup>00</sup> per insertion. Frequency discounts and reader service numbers not available for by-the-word classified space.

One additional color is available at \$95<sup>00</sup> per insertion. Color is determined by publisher at time of imposition.

Broadcast Engineering will reproduce business cards in a special advertising section of professional services for the broadcast industry. Cost is \$165<sup>00</sup> per insertion, black and white reproduction only.

Blind Box ads (replies sent to Broadcast Engineering for forwarding) are an additional \$45<sup>00</sup>. Reader Service Numbers are available for \$55<sup>00</sup> per insertion, or free with 4-inch or larger ads. In addition, company will be listed in the Advertisers' Index.

No agency commission will be paid on classified place. No prepayment is required.

**To reserve your classified ad space, call Brian Huber at 1-800-896-9939 or 913-967-1732 Fax: 913-967-1735**

e-mail: [brian\\_huber@intertec.com](mailto:brian_huber@intertec.com)

### Edit Suite System

- Alpha/PSP Elite 500 compositing switcher, 4 superlayers plus 4 aux layers
- Accom Axial 2010 editor
- 3 of GVG Kaleidoscope DVE channels
- 2 of GVG Kaleidoscope control panels
- 2 of GVG Kaleidoscope controller chassis
- 3 of GVG Kadenza switcher channels
- GVG Kadenza control panel

For more information please contact [post@pinnaclestudios.com](mailto:post@pinnaclestudios.com) or call engineering at 206-443-1000

### GMZ ELECTRONICS

**Audio & Video**  
Printed Circuit Boards

for Modifications and Stand Alone Hook-Up

#### COMING SOON MIC/LINE ATTENUATORS

Audio Pads: 24 Pads on each board! 600 ohms I/O  
4x4dB, 6dB, 8dB, 10dB, 15dB and 20dB Pads. Pass Phantom Power!

48 Volt Phantom Power Supply	48 Volt Splitter / 4 Mic
Unbalanced to Balanced Buffer	Talkback Mic Mute Card
Audio Distribution Amp. 1 x 6	Mixer Insert Send Buffer
IFB Communications Card	Digital Video Cable EQ.

[www.gmzelectronics.com](http://www.gmzelectronics.com) Phone: 732-516-1560

### TEST PATTERN SOURCES

Composite, S-Video, Component, RGB & Sync, Many options:

Multiple Patterns, Character Id and Tone

**GEKCO** [www.gekco.com](http://www.gekco.com)

Toll Free: 888-435-7221



**WhisperRoom** INC  
SOUND ISOLATION ENCLOSURES  
Vocal Booths  
Broadcast Booths  
etc...

PH: 423-585-5827  
FAX: 423-585-5831  
E-MAIL: [whisper@lcs.com](mailto:whisper@lcs.com)  
WEB SITE: [www.whisperroom.com](http://www.whisperroom.com)  
116 S. Sugar Hollow Road  
Morristown, Tennessee 37813

## Broadcast ENGINEERING

THE JOURNAL OF DIGITAL TELEVISION

### Telecine Suite

- Rank Cintel Turbo telecine with Festival, MetaSpeed, 35mm & 16mm gates
- Tube Enhancements thick faceplate tube
- Kinesis scan effects unit: zoom, rotate, focus, de-strobe
- DaVinci DU1 8:8:8 digital color corrector with Kilovectors and Edwin (serial #1451)
- Time Logic (TLC) standalone edit controller. 4-VTR port
- Digital Vision DVR1000 grain reducer with ASC and ANR
- Aaton Keylink timecode/keycode system, current hardware and software
- Accom DIS422 Stills store (serial # 1114)
- Steadifilm 2 system also available
- Nagra T audio tape recorder

For more information please contact [post@pinnaclestudios.com](mailto:post@pinnaclestudios.com) or call engineering at 206-443-1000

Circle (247) on Free Info Card

Buy, sell,  
consign or trade.  
We're the most  
flexible  
in the business.

**BROAD  
CAST  
STORE**

L.A. (818) 551-5858  
N.Y. (212) 268-8800  
[www.broadcaststore.com](http://www.broadcaststore.com)

Circle (246) on Free Info Card

### PTL TEST EQUIPMENT, INC.

Save 30% - 70% on quality  
reconditioned test equipment.

Tektronix - Hewlett Packard -  
Videotek, MSI, etc.

Video - RF - Microwave - Fiberoptics

Phone (561) 747-3647

Fax (561) 575-4635

E-Mail: [PTLTE@AOL.COM](mailto:PTLTE@AOL.COM)

WEBSITE: [WWW.PTLTEST.COM](http://WWW.PTLTEST.COM)

**BUY-SELL-LEASE-TRADE**


# Are You Exposed?

## Premium Cable Satellite Space Fully Protected

- GE SATCOM C-3
- Full time DigiCipher-II digital channels
- Fully protected & non-preemptable
- Located at 131 W.L.
- E.O.L. 2004

Uplinking, playback, editing, and duplication services available

**Call Doug Greene at 303-784-8809**  
or E-Mail at [dgreene@jic.com](mailto:dgreene@jic.com)




Circle (248) on Free Info Card

We specialize in systems integration, but what we're really about is solutions.



For details call us at  
(818) 551-5871  
or visit us at  
[www.b-bsystems.com](http://www.b-bsystems.com)

Circle (250) on Free Info Card

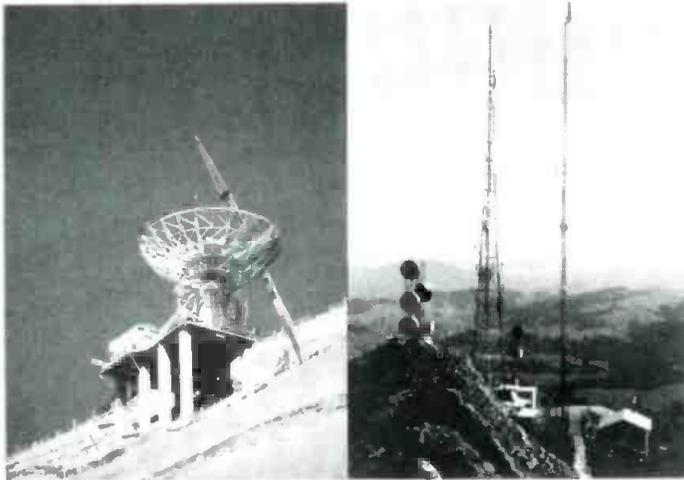

the  
**FANTOZZI**  
company, inc.

Ground Facilities  
Earth Stations  
Towers  
Civil Works  
Testing/Inspections  
Tall Towers

Structural Studies  
Static/Dynamic Analyses  
Failure Analyses  
Risk Assessments  
Location/Height Verification  
Surveying/GIS

Engineers/Constructors


Design/Build

**PROVIDING TURNKEY ENGINEERING AND CONSTRUCTION SERVICES TO THE COMMUNICATIONS INDUSTRY**

28 North First Street, Suite 210 San Jose, CA 95113  
(408)297-2700 FAX:(408)297-2766 web: [www.tfanco.com](http://www.tfanco.com)

Circle (249) on Free Info Card

Place your business on *top* of the world with 35,000+ worldwide circulation! Advertise in *Broadcast Engineering!*



# READY WHEN YOU ARE



As soon as you're ready, you can put your ad message in the Help Wanted section of *Broadcast Engineering* classifieds! Promote your company and post a job opening!

**Call Brian Huber today!**  
**1-800-896-9939**  
**Fax 913-967-1735**



## Discover the Advantages of Reprints!

For a quote or to discuss how reprints from this magazine can work for you--*call me!*

**Jenny Eisele, Intertec Publishing**  
Phone: 913-967-1966 Fax: 913-967-1901

### STUDIO MAINTENANCE ENGINEER:

Must be able to perform the following duties: install and maintain studio transmission equipment including video switchers, audio consoles, DVE, CG, SS, cameras, and robotics. Familiarity with automation systems and master control environment. Should possess a general computer/networking background. Must be able to work on a rotating shift schedule. Candidates should have an engineering degree or equivalent technical training. SBE/FCC certification a plus. If you want to be a part of the exciting transition to HDTV in the most exciting city in the world, please send your resume and cover letter to: Kurt Hanson, Chief Engineer, WABC-TV, 7 Lincoln Square, New York, NY 10023. No telephone calls or faxes please. We are an equal opportunity employer.

### BROADCAST MAINTENANCE ENGINEER

**(Vacation Relief)**—Excellent opportunity for an experienced Broadcast Engineer at the ABC O&O in New York. Responsibilities include the installation/maintenance of studio and transmission equipment, including video switchers, routers, VTR, audio consoles, SS, cameras and DVE. Must be able to do component level repair, work well under pressure and with little supervision. Must possess knowledge of analog/digital systems, and a minimum of three years broadcast television experience. Candidates should have an engineering degree or equivalent technical training. SBE/FCC certification a plus. Please send resume only to: Kurt Hanson, WABC-TV, 7 Lincoln Square, New York, NY 10023. No telephone calls or faxes please. We are an equal opportunity employer.

## DIRECTV – AN ENTERTAINING PLACE TO WORK!

DIRECTV is the nation's #1 digital satellite entertainment service. We deliver access to over 210 digital-quality channels, including 32 premium movie channels like HBO®, STARZ!® and SHOWTIME® popular cable networks, 31 audio Music Choice channels, every major professional and college sports subscription, and as many as 55 different pay per view choices a night. We also offer 24-hour customer service. The best known and most widely respected consumer electronics manufacturers produce the DIRECTV System hardware. Over 8.1 million homes and businesses across the country, including those subscribing to the medium power PRIMESTAR by DIRECTV Service, now enjoy DIRECTV® entertainment and many more are signing up for DIRECTV® Service every day. Additionally, DIRECTV will soon provide innovative interactive features that will keep our product on the leading edge of entertainment breakthroughs for the rest of the century and beyond!

### Principal Engineer, Broadcast Systems (201946-BU)

We are looking for an engineer to provide team leadership to a group of engineers responsible for a state-of-the-art broadcast automation system at our new broadcast center. Will be responsible for schedules, task management and performance as we all work with vendors and broadcast center customers on-site to resolve on-air issues. We are looking for individuals with 15 years software and systems development and 5 years of team leadership/management experience. Must have background in performing system level and software application design, implementation, testing and various computer platforms including UNIX and Windows.

### Sr. Staff, Broadcast Systems (201947-BU)

We are looking for an individual to perform end-to-end development and implementation of a state-of-the-art monitoring system for a new broadcast facility. Responsible for the design, development, testing and implementation activities. 10 years of software and systems development experience, a background in performing system level and software application design for operating systems including UNIX and Windows, and a BS in Computer Science or EE are desired.

### Sr. Staff Engineer, Broadcast Systems (201948-BU)

We are looking for an individual to participate in the implementation of changes to existing broadcast automation systems, participate in the planning, selection, design and implementation of a new broadcast automation system. 10 years of software development experience in performing software application design for various operating systems including HP-UX, QNX and Windows NT are desired. Applicants should have a BS in Computer Science or EE and a Master's is preferred.

### Staff Engineer 2 (201945-BU)

You will perform end-to-end development and implementation of the monitoring system for our broadcast facility. Responsible for development, testing and implementation activities. 5-7 years of software and systems development experience and a background performing system level and software application design, implementation and testing for various platforms and operating systems including UNIX and Windows and 'C' language.

### Staff Engineer 1 (201944-BU)

Will perform development and implementation of our error monitoring system for our broadcast facility. Responsible for development, testing and implementation activities. 0-3 years of software development experience in performing software application development using various platforms and operating systems including UNIX, Windows and 'C' language is desired. Candidates should possess a BSCS or BSEE and a Master's in Computer Science is preferred.

DIRECTV offers its employees an excellent benefit package including a choice of medical and dental plans, optical coverage, life and disability insurance, a 401k plan, retirement, generous vacation and holiday allowances and education reimbursement. Please send your resume, indicating appropriate job code, to our corporate headquarters located at: DIRECTV, Inc., Employment, P.O. Box 915, El Segundo, CA 90245 or email (text format only, no attachments) to [resume@directv.com](mailto:resume@directv.com). For more information about DIRECTV, please visit our website at: [www.directv.com](http://www.directv.com). DIRECTV is proud to be an equal opportunity/affirmative action employer. We strongly support workforce diversity.



## Don't delay!



Get your ad in the next available issue!

Call Brian Huber today for details:  
800-896-9939

**DIRECTOR OF ENGINEERING:** CBS O&O in San Francisco is looking for an experienced Director of Engineering. Person should have strong credentials in personnel and budget management. Emphasis is on experience in broadcast engineering, digital, MIS, and Internet. Good project planning and communications skills a must. Fax resume to: (415) 765-8796. EOE

KNVA-TV seeks highly motivated Master-Control Operator to fill overnight position. Some experience in Television is preferred, computer experience is a must. Applications will be accepted until March 24, 2000. Send your current resume to 908 West MLK, Austin, Texas, 78701. E.O.E. no phone calls please.

### MEDIA GENERAL BROADCAST GROUP

[www.mgbg.com](http://www.mgbg.com) WJTV-TV: Sports Reporter/ Videographer to perform videographer duties, editing, and on-air presentation of sports stories; write sports copy; and maintain awareness of current events for both news and sports. Education equivalent of BS degree in Journalism, Communications or related field. Minimum two years TV sports reporting, videography, and editing experience preferred. Tape required. Ability to operate technical equipment, such as recording and editing equipment. Knowledge of Journalistic standards as they relate to video presentation of news stories. Strong writing and communication skills. EOE M/F Drug Screen. Send to HR Dept. 1820 TV Road, Jackson, MS 39204-4148



### Manager of Newsroom Technology Job Advertisement

WANT TO BUILD THE NEWSROOMS OF THE FUTURE?

Time Warner Cable's Local News Group is seeking a Manager of Newsroom Technology who will be responsible for researching and implementing the technology and production tools used for its local news and programming operations. This position requires knowledge of newsroom production, playback and automation systems. Candidates must have 3-5 years demonstrated experience in: video/audio systems design, computer/network design and technical facility construction.

If you are looking to combine your engineering, production and computer skills to build the next generation of local content production systems, fax or e-mail your resume and salary history to:

FAX: 203-328-3294  
EMAIL: jobs@twcnews.com

Time Warner Cable is an Equal Opportunity Employer

### WE PLACE ENGINEERS

Employer Paid Fees.  
20 Years personalized &  
confidential service.  
All USA States & Canada



MAIL & FAX:

### KEYSTONE INT'L., INC.

Dime Bank, 49 S. Main St., Pittston, PA 18640 USA  
Phone (570) 655-7143 • Fax (570) 654-5765  
website: keystoneint.com

We respond to all  
Employee & Employer Inquiries  
ALAN CORNISH / MARK KELLY

**AT&T Broadband Job Opening** Broadcast Technician needed at multi-channel TV facilities in Littleton, CO. Duties include installation and repair of all types of broadcast video and audio equipment. Minimum qualifications include 3+ years of broadcast video, audio equipment repair and operations experience. The preferred candidate will also possess an SBE and/or Associates Degree in electronics and experience in maintenance and repair of analog and digital video and audio equipment including: multiple format video tape recorders, video file servers, On-Air Automation Systems, routing switchers, and master control switchers. Other duties, weekend and shift work as required. A drug and background check will be required for successful applicants. Non-smoking environment. EOE.

Please send resume to:  
AT&T Broadband  
National Digital Television Center - Denver  
ATTN: Human Resources  
cc: Broadcast Engineering Manager  
4100 E. Dry Creek Road  
Littleton, CO 80122  
NO PHONE CALLS PLEASE  
Equal Opportunity Employer  
<http://www.nets-tel.com>

### IMMAD ECVS

#### Are you being challenged?

IMMAD ECVS, a division of AZCAR Technologies Incorporated, a public company trading as AZZ on the Toronto Stock Exchange, is one of the largest combined independent system integration companies and is a world leader in Broadcast Systems Integration. We are a dynamic company poised for significant growth in the exciting conversion to digital television. With plants in Markham, Ontario, and Boonton, New Jersey, IMMAD ECVS is looking for Project Managers and Engineers who want to be part of our successful team and challenged by digital television.

#### Project Management Broadcast Systems Integration

Qualifications include: Industrial Engineering and/or Electrical Engineering skills set, knowledge or keen interest in TV broadcast systems, strong interpersonal and communication skills, and an excellent financial skill set. APMI accreditation a plus.

#### Senior and Mid-level Television System Engineers

The senior Engineering candidate should have the following: a E.E. and/or P. Eng., a strong background in Television engineering, financial and management skills at the project level and a have a working knowledge of AutoCAD.

The Mid-level Engineering candidate should have the following: a good background in television engineering, and engineering management skills with a working knowledge of AutoCAD. A E.E. or P. Eng., would be a plus.

Candidates must possess excellent problem solving abilities, be able to accept responsibility, work in a team environment and have a working knowledge of Office 97. Successful applicants will be mature, organized, able and willing to travel for several weeks at a time.

Please send resume to:  
FAX: (905) 470-2559  
Email: sam.gouveia@immad.com

**DIRECTOR OF ENGINEERING:** WVPT-TV, an award-winning PBS station located in the beautiful Shenandoah Valley, seeks a Director of Engineering. The ideal candidate will manage all aspects of the Engineering and Operations departments. Capital planning, familiarity with budgets, and strong supervisory skills required. Will oversee WVPT's DTV conversion, maintenance, and technical operations. Requires excellent communications skills, prior management experience, working knowledge of analog and digital transmitters, microwave, studio, master control equipment, linear/nonlinear production systems, MAC, PC, UNIX, computer networking systems. Prefer FCC General Class license or Senior Engineer SBE certification. Plant in very good condition; capital needs have been addressed annually as we begin our migration to DTV. Reply to Executive Secretary, WVPT, 298 Port Republic Road, Harrisonburg, VA 22801. EOE/AA

### ASST. DIRECTOR OF ENGINEERING

ABC7 Los Angeles is looking for an experienced technical manager who will assist the Director of Engineering in overseeing the day-to-day technical operations of the station. Qualified candidates should have significant experience in broadcast engineering including maintenance, in-house and remote operations and design, capital planning and implementation, knowledge of physical plant systems, technical construction, and a strong familiarity with applicable laws, regulations and standards.

Interested applicants must possess excellent verbal and written communication skills and should have prior experience working with collective bargaining units. Knowledge of and familiarity with networking systems, PC/MAC platforms and operations systems, AutoCad and Excel a must. Minimum of 5 years major market television experience in engineering management or supervision required. College degree preferred.

Please send resume to: **ABC7 Los Angeles, Attn: Kimberly Castillo, Dept. ADE/BE, 4151 Prospect Avenue, Los Angeles, CA 90027.** No phone calls please. Equal Opportunity Employer.



**CHIEF ENGINEER: WHUT-TV, WASHINGTON DC** Howard University is currently seeking a CHIEF ENGINEER to provide guidance and management of the Engineering Department of WHUT; oversees the maintenance of all broadcast and closed circuit equipment. Identifies technical equipment. Identifies technical malfunctions and trouble shooting technical equipment. Diagnosis equipment problems and assigning and inspection repair and maintenance work. Interested applicants should submit a cover letter and two resumes, re: Job Number: J-46-199-D-59, to: Howard University Department of Employment, 400 Bryant Street, NW, Washington, DC 20059. Please see the full posting for this position, including position requirements, on our website [www.howard.edu](http://www.howard.edu). Howard University is an EOE/AA Employer.

### National Sales Manager

You will manage and direct the sales, promotion, customer relations, and training for North America for Clear-Com Matrix Plus and Party Line. Your responsibilities will include the supervision of the internal sales team and three regional sales managers, customer support, and applications engineering. You will work closely with media marketing, product management, engineering, finance, and manufacturing.

A minimum of five years in senior sales management in the broadcast and/or professional audio market with a proven record plus a bachelors degree or MBA in marketing, business, or related fields is required.

We offer highly competitive salaries commensurate with experience, excellent benefits, and a corporate environment that encourages and rewards talented individuals. Clear-Com is enjoying record-breaking growth and stability. Please forward your resume to:

**HR@clearcom.com or Fax 510-496-6602.**

All responses will be held in strictest confidence.



**DIRECTOR OF ENGINEERING:** The State of Wisconsin Educational Communications Board, the licensee of five public television and 18 public radio stations, has an immediate opening for a Director of Engineering/Chief Engineer. This position is responsible for the planning, development, and ongoing management of statewide delivery engineering for the Wisconsin Public Radio and Television networks. The Director of Engineering has overall responsibility for coordinating the work of 44 Engineering/Operations professionals in the Engineering Division. Successful applicants will have education, training, credentials and experience demonstrating the capacity to provide leadership to a strong engineering team. The individual will be responsible for planning and implementing the digital transition for the state radio and television networks, including replacement of head end facilities and the broadcast network interconnect. A successful candidate will have 7+ years of experience in complex project management, broadcast technology and supervision of staff. Must be thoroughly familiar with digital broadcast technology and transmission systems, from Master Control through antenna. Attractive and competitive salary commensurate with qualifications and experience. Excellent benefit package. Headquarters location: Madison, WI. Send detailed resume and salary history in confidence to: Personnel - Director of Engineering Search, The Wisconsin Public Broadcasting Center, 3319 West Beltline Highway, Madison, WI 53713. Include a letter describing how your experience will contribute to the Wisconsin state radio and television network conversion to digital broadcasting. Candidate consideration begins immediately and position remains open until filled. AN EQUAL OPPORTUNITY EMPLOYER

**VICE PRESIDENT, ENGINEERING & OPERATIONS:** KDVR Fox 31 has an exciting opportunity for an experienced, senior-level, engineering manager. The station is currently constructing a new, state-of-the-art facility in preparation for a FOX-style news launch (check it out at [www.kdvr.com](http://www.kdvr.com)), and we're seeking the right person to oversee the technical and operational departments. Job duties include: responsibility for all engineering and technical aspects of KDVR's facilities; managing all technical operations for news, including start-up; overseeing all maintenance and operational functions encompassing all areas of engineering; planning, coordinating and implementing capital projects, including budgets, timelines and organization; acting as liaison between engineering and all departments, including news, for on-going, daily operations, major events and special projects. **REQUIREMENTS:** 5 years experience as a chief engineer in a medium to large market as a proven project manager, staff developer, and administrator of television engineering operations required; several years management level experience in a news environment required; excellent managerial, organizational, interpersonal and communication skills required; strong knowledge of FCC rules and regulations required; knowledge of computer and transmission systems required; SBE certification strongly desired. No phone calls, please. Qualified candidates should send or fax resumes with salary requirements to KDVR Fox 31, Attn: Human Resources/VPE, 501 Wazee St., Denver, CO 80204. FAX (303) 357-3953 EOE

# ENGINEERS

Turner Broadcasting System has career opportunities for experienced television engineers. These career positions demand an extensive background in equipment maintenance, digital video and audio, and knowledge of computer systems and networks. Please mail or fax your resume and cover letter to:

**Jim Brown**  
**Assistant Vice President of Engineering Services**  
**Turner Broadcasting System, Inc.**  
**One CNN Center**  
**P.O. Box 105366**  
**Atlanta, GA 30348-5366**

Fax: 404-827-1835 • Phone: 404-827-1638  
 TBS is an equal opportunity employer.



THE WORLD'S NEWS LEADER

### BROADCAST MAINTENANCE TECHNICIAN

The Freedom Forum/Newseum an international journalism foundation located in Arlington, VA is looking for a broadcast maintenance technician to work in a high-tech museum environment. The ideal candidate should have at least three years of experience within a broadcast television operations environment, strong computer skills, exposure to large screen video projection systems and good bench technical skills. Primary role will be to support the Newseum's technical and broadcasts areas, plus add support to our computer systems department. Good interpersonal skills are a must in this shop oriented work environment. The work schedule is planned to include some evening and weekend hours. Candidate should be able to lift 50 pounds. Please send letter of interest and resume to:

Nate Ruffin, VP/Human Resources  
 The Freedom Forum  
 1101 Wilson Boulevard  
 Arlington, VA 22209

Check out the  
 Broadcast Engineering web site  
 for career opportunities!  
[www.broadcastengineering.com](http://www.broadcastengineering.com)

#### MEDIA GENERAL BROADCAST GROUP

[www.mgbg.com](http://www.mgbg.com) WJTV-TV: Executive Producer to oversee daily news assignment operations; plan special events and projects; supervise daily output assignments; and share responsibility for editorial control of story content with News Director. Education equivalent of BS degree in Journalism, Communications, or related field. Five years management experience in a TV newsroom. Knowledge of journalistic standards as they relate to on-air presentation of news. EOE M/F Drug Screen. Send resume to HR Dept. 1820 TV Road, Jackson, MS 39204-4148

**MAINTENANCE TECHNICIAN:** The successful applicant will have completed a program of electronics training at a recognized institute of Technology paired with a minimum of five years of television broadcast experience. RF experience would be a plus. Send resume to Haralds Rudzroga, Maintenance Supervisor, ONtv Limited, P.O. Box 2230 Station 'A', Hamilton, Ontario, Canada L8N 3A6, or fax to 905-527-5022 or Email: [hruzdrog@ontv.wic.ca](mailto:hruzdrog@ontv.wic.ca)

**THE WEATHER CHANNEL** is looking for a motivated and reliable individual to join our team as a **BROADCAST SYSTEMS ENGINEER**. You will maintain and repair analog and digital video and audio systems, including routers, switchers, automation systems, VTR's, cameras, and related broadcast technology. Candidate must also have ability and desire to develop skills in UNIX, Windows NT, and networking systems. 4 years experience as a maintenance engineer, with television broadcast related systems and equipment is required. If you want to be a part of our team, send your resume today! Email your resume to [jobs@weather.com](mailto:jobs@weather.com) or fax to 770/226-2959. \*Please reference "Engineer-BE" in response. The Weather Channel, 300 Interstate North Parkway, Atlanta, GA 30339

**VP SALES**, possibly Gen. Mgr. We need a dynamic, technically savvy sales professional to orchestrate and manage explosive growth in our FM and TV product line. E-mail resumé to [sales@svpa.com](mailto:sales@svpa.com) or some see us at Booth R2697.

**MAINTENANCE ENGINEER:** Immediate opening for an experienced broadcast Engineer. Must have a minimum of 2 years experience in broadcast maintenance, including systems troubleshooting and repair of studio video and audio equipment to the component level. Computer and networking experience a plus. FCC General Class License or SBE Certification is desired. Excellent wage/benefit program. Respond with resume to Personnel Administrator- 139, WTOL-TV, P.O. Box 1111, Toledo, Ohio 43699- 1111. No phone calls, EOE.

Invest Your  
 Advertising Dollar  
 Where Your  
 Prospects Invest  
 Their Time .....

# Ad Index

	Page Number	Reader Service Number	Advertiser Hotline
com Inc.	19	111	650-328-3818
DC Broadcast	24	116	800-726-4266
DC Broadcast	96	146	800-726-4266
A Video	158	180	530-274-2048
Andrew Corp.	114	150	708-349-3300
Angenix	57	126	201-812-3858
AV Systems	139	167	858-674-5239
AV Enclosure Prod.	126	125	661-702-7200
F&T Digital Media	187	198	303-486-3895
Audio Technica	143		330-686-2600
Avatar Systems	14-15	109	608-273-5876
Avionics Corp.	135	164	516-328-7500
AVCO	151	175	770-590-3600
& B Systems	214	250	818-551-5858
3C Resources	23	114	
ack Associates	212	245	512-252-7555
Anchor Mark	205	213	800-262-4675
SH Photo-Video	208-211	222,223	212-239-7500
roadcast Microwave Serv.	92	144	619-560-8601
roadcast Store	213	246	818-551-5858
roadcast Supply Worldwide	197	205	800-426-8434
roadcast Technology	71	132	126043302633
roadcast Video Systems	188	200	905-764-1584
altec Audio	93	143	1422842159
anon USA	61	128	800-321-4388
apitol Technologies	205	209	877-630-8099
aytron	121	155	516-845-2000
iprico	185	197	800-727-4669
olumbine	179	192	303-237-4000
omm scope	79	135	800-982-1708
ommunications Spec	195	204	516-273-0404
PI/Eimac	81	136	650-592-1221
reative Planet	87	139	323-634-3400
ielect c	155	177	207-655-4555
igibic om	212	244	301-571-0790
iviCor	21	113	408-944-6700
INF Industries	184	196	818-252-0198
olby Labs	75	133	415-645-5000
lovebr	97	147	
I.P.S.	25	115	606-371-5533
lectronics	17	110	616-697-6831
SE	162,206	182,220	310-322-2136
-Studio Live	83	137	617-273-1512
vert Microsystems	193	203	905-335-3700
tron Electronics	63	129	714-491-1500
antozzi Company	214	249	408-797-2700
aroud	147	172	408-735-1492
ischer Connectors	125	156	800-551-0121
orecas Consoles	130	161	516-253-9000
ujinon, Inc.	77	134	972-385-8902
grass Valley Group	67	130	800-998-3588
arris Corp. Broadcast Div.	3	104	606-282-4800
arris	9	106	650-843-3665
enny Engineering	200	207	626-355-3636
lorida	206	212	949-489-0240
.COM Industry	188	201	703-707-9094
kegam	89	140	201-368-9171
ndustry Click	134,199	163,206	816-300-0323
nscriber Technology	59	127	800-363-3400

	Page Number	Reader Service Number	Advertiser Hotline
InterBEE 2000	191	202	
Jones Earth Segment, Inc.	214	248	303-784-8809
KTech Telecommunications	55	124	818-361-2248
LeBlanc Broadcast	150	174	
Leitch Incorporated	53,205	123,211	800-231-9673
Leitch Incorporated	222	103	800-231-9673
Lighthouse Digital Sys.	178	191	916-272-8240
Marconi Applied Tech.	141	168	914-592-6050
Marshall Electronics	116	152	213-390-6608
Maxell Corp.	111	148	800-533-2836
Mindport Irtdeto Access	189	199	
Miranda Technologies Inc.	11	107	514-333-1772
Motorola Broadband	149	173	215-323-1000
NCTA	166		202-775-3629
Northstar Tech Serv.	184,206	195,214	954-921-5868
NOVA Systems	154	157	800-358-NTSC
Nucomm	163	183	908-852-3700
NVision Inc.	165-175	184-189	530-265-1000
Odetics	4-5	105	800-243-2001
Omneon	50-51	122	408-558-2113
Open TV	153	176	650-429-5547
PAG Ltd.	49	121	081-543-3131
Panasonic Broadcast	7		800-528-8601
Pesa Switching	69	131	800-328-1008
Philips Broadcast	159	179	800-962-4287
Pinnacle Studios	213	247	
Pinnacle Systems	145	170	650-526-1600
Pipco Communications	206	210	323-466-5444
Play, Inc.	29,177	119,190	916-631-1865
Radamec	146	171	908-518-0685
Rocket Network	91	141	415-538-0123
Ross Video	90	142	613-652-4886
Sabre Communications	138	166	712-258-6690
Sachtler Corp.	27	117	www.sachtler.de
SCTL	180		610-363-6888
Seachange	183	194	978-897-0100
Snell & Wilcox	32-33	120	408-260-1000
Solid State Logic	117	153	800-343-0101
Sony	31,35-48		800-472-SONY
Studio Exchange	212	243	818-840-1351
Studio Pro 2000	207		
Switchcraft	137	165	773-792-2700
Tadiran Scopus	119	154	
Tandberg	113	149	949-725-2552
Telecast Fiber Systems	26	118	508-754-4858
Telemetrics, Inc.	142	169	201-848-9818
Telex Communications	95	145	800-392-3497
TeraNex	85	138	407-517-1086
Thomson Tubes	127,129,131	158-160	201-812-9000
Tieman Communications	13	108	619-587-0252
Trompetter Electronics	20	112	818-707-2020
Tron-tek	207	219	918-663-4877
Ultimate	161	181	818-993-8007
Utah Scientific Inc.	133,207	162,221	801-524-9999
Videotek, Inc.	221	102	800-800-5719
Wavetek Wankel Coleman	181	193	
Wegener	115,205	151,218	770-623-0096
Wheatstone Corporation	2	101	252-638-7000
Windows to the Web	198		
3DFX	200	208	972-234-8750
360 Systems	157	178	818-991-0360

# Broadcast ENGINEERING

## EDITORIAL

Brad Dick, *Editor*  
 Steve Epstein, *Technical Editor*  
 Jim Saladin, *Senior Associate Editor*  
 Patrick Murphy, *Associate Editor*  
 Laura Collins, *Editorial Assistant*  
 Tom Cook, *Dir., Editorial Development*

## ART

Darlene Wilson, *Art Director*

## TECHNICAL CONSULTANTS

Jerry Whitaker, *Conference Consultant*  
 Brad Gilmer, *Computers & Networking*  
 John H. Battison, P.E., *Antennas/Radiation*  
 Michael Robin, *Digital Video*  
 Donald L. Markley, *Transmission Facilities*  
 Harry C. Martin, *Legal*  
 Larry Bloomfield, *News Technology Editor*  
 Paul McGoldrick, *Industry Watcher*

## BUSINESS

John Torrey, *V.P. Entertainment Division*  
 Dennis Triola, *Group Publisher*  
 Rachelle Thomas, *Marketing Director*  
 Kathy Lewis, *Advertising Coordinator*  
 Mary Mitchell, *Classified Adv. Coordinator*  
 Sherri Gronli, *Corporate Circulation Director*  
 Leann Sandifar, *Circulation Manager*  
 INTERTEC Publishing  
 Cameron Bishop, *President and CEO*  
 Ron Wall, *Chief Operating Officer*  
 Stephanie Hanaway, *Div. Dir. of Marketing*  
 Doug Coonrod, *Corporate Art Director*

## PRIMEDIA Information Group

Curtis Thompson, *President/CEO*

## PRIMEDIA Inc.

Tom Rogers, *Chairman and CFO*  
 Charles McCurdy, *President*  
 Beverly C. Chell, *Vice Chairman*

## MEMBER ORGANIZATIONS

### Sustaining Members of:

- Acoustical Society of America
- Society of Broadcast Engineers
- Society of Motion Picture and TV Engineers
- Society of Cable & Telecommunications Engineers

Member, American Business Press

Member, BPA International

Affiliate Member.

International Teleproduction Society



**BROADCAST ENGINEERING** is edited for corporate management, engineers/technicians and other management personnel at commercial and public TV stations, post-production and recording studios, broadcast networks, cable, telephone and satellite production centers and networks.

**SUBSCRIPTIONS:** Non-qualified persons may subscribe at the following rates: United States and Canada; one year, \$65.00. Qualified and non-qualified persons in all other countries: one year, \$80.00 (surface mail); \$145.00 (air mail). Subscription information: P.O. Box 12937, Overland Park, KS 66282-2937.

Photocopy authorization for internal or personal use is granted by PRIMEDIA Intertec, provided that the base fee of U.S. \$2.25 per copy, plus U.S. \$00.00 per page is paid directly to Copyright Clearance Center, 222 Rosewood Dr., Danvers, MA 01923. The fee code for users of the Transactional Reporting Service is ISSN 0361-0942/1999\$2.25+00.00. For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. Prior to photocopying items for classroom use, contact CCC at (978) 750-8400. For large quantity photocopy or reprint requirements contact Jenny Eisele, (913) 967-1966. For microfilm copies call or write Bell & Howell Info., 300 N. Zeeb Rd., P.O. Box 1346, Ann Arbor, MI 48106-1346. Phone: (313) 761-4700 or (800) 521-0600.

©1999 by Intertec Publishing **INTERTEC PUBLISHING**  
 All rights reserved.

# Sales Offices

## WEST

Duane Hefner  
 5236 Colodny Ave., Suite 108  
 Agoura Hills, CA 91301  
 (818) 707-6476  
 Fax: (818) 707-2313  
 dnhefner@worldnet.att.net

## EAST

Josh Gordon  
 335 Court Street, Suite #9  
 Brooklyn, NY 11231  
 (718) 832-0488  
 Fax: (718) 522-4751

## EAST/MIDWEST

Joanne Melton  
 1775 Broadway, Suite 730  
 New York, NY 10019  
 (212) 333-4655  
 Fax: (212) 459-0395  
 joanne\_melton@intertec.com

## INTERNATIONAL

Richard Woolley  
 Tony Chapman  
 P.O. Box 250  
 Banbury, Oxon OX16 8YJ U.K.  
 +44 (0) 1295 278407  
 Fax: +44 (0) 1295 278408  
 richardwoolley@compuserve.com

## REPRINTS

Jenny Eisele  
 (913) 967-1966  
 Fax: (913) 967-1901

## JAPAN

Orient Echo, Inc.  
 Masby Yoshikawa  
 1101 Grand Maison  
 Shimomiyabi-Cho 2-18  
 Shinjuku-ku, Tokyo 162, Japan  
 (3) +81 3235-5961  
 Fax: (3) +81 3235-5852

## CLASSIFIED ADVERTISING

OVERLAND PARK, KS  
 Brian Huber  
 P.O. Box 12901  
 Overland Park, KS 66282  
 (800) 896-9939 (913) 967-1732  
 Fax: (913) 967-1735

## LIST RENTAL SERVICES

Lisa Majewski  
 9800 Metcalf  
 Overland Park, KS 66212-2215  
 (913) 967-1872  
 Fax: (913) 967-1897

**CUSTOMER SERVICE: 913-967-1707 OR 800-441-0294**

**BROADCAST ENGINEERING** (ISSN 0007-1994) is published monthly (except semi-monthly in May and December) and mailed free to qualified persons by PRIMEDIA Intertec, 9800 Metcalf, Overland Park, KS 66212-2216. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canada Post International Publications Mail (Canadian Distribution) Sales Agreement No. 0956295. POSTMASTER: Send address changes to *Broadcast Engineering*, P.O. Box 12902, Overland Park, KS 66282-2902. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2216 Phone: 913-341-1300; Edit. fax: 913-967-1905; Advert. fax: 913-967-1904. © 1999 by Intertec Publishing. All rights reserved.



## Drag and click commercials

BY PAUL MCGOLDRICK

**T**he experts tell us that more and more people are surfing the Web while they watch TV, a significant trend for the future of video content — and an argument for interactivity, at least in the realm of commercials. So far the experiments are mild (like the ability to download a page to order flowers on EchoStar). But it may be that we are at last entering an era when interactivity might become real.

The marketers have given a name to these users: *telewebbers*. They are people who e-mail or surf while watching their favorite programs. Obviously, having a mouse in your hand while an advertisement is running on a nearby receiver could be closely connected acts, and the industry is already predicting commerce revenues of as much as \$10 billion within five years. Whether these Internet connectors and display devices are different products or a combined appliance will be extremely important to the developing industry.

Despite our living in an age when change is rapid, there is still an amazing amount of inertia in most of us — inertia that is probably mostly habit. But there are large groups of users that can be addressed — or targeted, if you are cynical — to change those habits. The 22 million AOL subscribers, for example, are certainly not going to be allowed to ignore the content provided by Time Warner on AOL TV. For AOL, of course, the intent is to make sure that content is viewed on the PC, while others would rather that a set-top box connected to a conventional display be the controlling access.

### Bigger pipes are getting closer

More and more of us are reaching the first Nirvana level of Mb/s-something connections to the Internet backbone. With those connections, the possibilities for requested video into our

homes becomes more realistic. That has not been ignored by other groups of potential providers, and newly ex-tant technologies suddenly become important. One interesting device is the Streamaster from Motorola.

Streamaster is now a couple of years old, but having changes made in software rather than silicon has allowed the product to grow with the opportunities. This maturity means that the communications processing module can now control ATM protocols, ADSL, VDSL, hybrid fiber optic coaxial (HFC) with DOCSIS (digital cable), satellite and terrestrial. Motorola's notions were that Streamaster could cover full DVD home theater, video-on-demand, Web browsing and online gaming. A partnership was clearly needed and Motorola obtained an infrastructure gain with its acquisition last year of General Instruments. Apart from being the largest supplier of cable TV equipment products, GI also had a stake in Next Level Communications, which is developing the infrastructure technology for getting all manner of signals over DSL. Next Level's Residential Gateway 2000 — a set-top box to harness the DSL applications — may well be competition for Motorola's Streamaster, but there is also a great opportunity for the companies to cooperate in a single solution.

That seems less likely now that Motorola has recently teamed with Canadian iMagicTV to deploy that company's DTV manager software with Streamaster to access broadband delivery services. While the federal government has been poorly inclined to accept that the Internet is a suitable distribution facility for broadcast TV, it is very clear that the U.S. telecommunication companies regard DSL as a golden opportunity to provide a plausible alternative to cable. Most

are looking at plans to deliver broadcast TV with the opportunity to add interactive TV and Internet. Of course, the copper will still be usable for dial-tone services.

This may be one reason why a lot of these companies are reluctant to roll out DSL services before they can offer a total package to the customer. If the user has high-speed Internet access available before the local company can provide services, then there will be newcomers out there who will offer their own video/service packages earlier. Hollywood and the U.S. courts may have bloodied the upstart icraveTV, but there are a lot of creative entrepreneurs who see the Internet as the world's first level playing field: It doesn't matter who you are, your domain registration price is the same.

In rural areas, such as where I live, we have had to be a great deal more creative to get high-speed services. Although our local telephone supplier — whose franchise has already expired — equipped its new digital exchange with DSL equipment, it has continuously refused to provide services. This is certainly not novel in the country. Out of necessity, our community has done an end-run around the supplier such that a major cooperative of different public utilities has built a backbone that stretches for 150 miles. At the time you read this, every business and every home in our community can have DSL at an attractive price. I'm ready for it; I don't think I'm ready for interactive TV to be directed at me, but then I've got habits too. ■

*Paul McGoldrick is an industry consultant based on the West Coast.*



Send questions and comments to:  
[paul\\_mcgoldrick@intertec.com](mailto:paul_mcgoldrick@intertec.com)

The newest edition to  
our dynasty.



The new VTM-400HD Multi-format High Definition On Screen Monitor extends Videotek's revolutionary monitoring system family to High Definition TV formats.

The VTM-400HD accepts 720p, 1080i, and 1080p/24sF formats and can simultaneously display picture, waveform, vector, audio and alarm information on a high-resolution XGA display in either 16:9 or 4:3 aspect ratio.

Multiple inputs, filters and line selects allow the mix of waveform displays you need. Alarm limit conditions can be adjusted and displayed with time and date stamps. The optional SpyderWeb™ software enables logging of all alarms to a PC and networking of multiple VTM-400HD units for unattended signal quality monitoring over a LAN, WAN, and Internet.

Audio options allow for simultaneous viewing of 2, 4, 6, or 8 audio channels, including levels and phase, plus Videotek's exclusive CineSound™ display for monitoring 5.1 or 7.1 channels of audio.

Packed with features important to editors, producers, and engineers, the VTM-400HD is truly the ultimate HDTV monitoring solution.

For more information on the VTM-400HD, call one of our sales engineers at 800-800-5719, or visit our web site at [www.videotek.com](http://www.videotek.com).

 **VIDEOTEK®**  
A Zero Defects Company



Visit our NAB Booth #L12924

SpyderWeb™ and CineSound™ are trademarks of Videotek, Inc

Circle (102) on Free Info Card

Premium Quality, Intelligent Design, Total Value... That's Videotek.

# think video, think Leitch

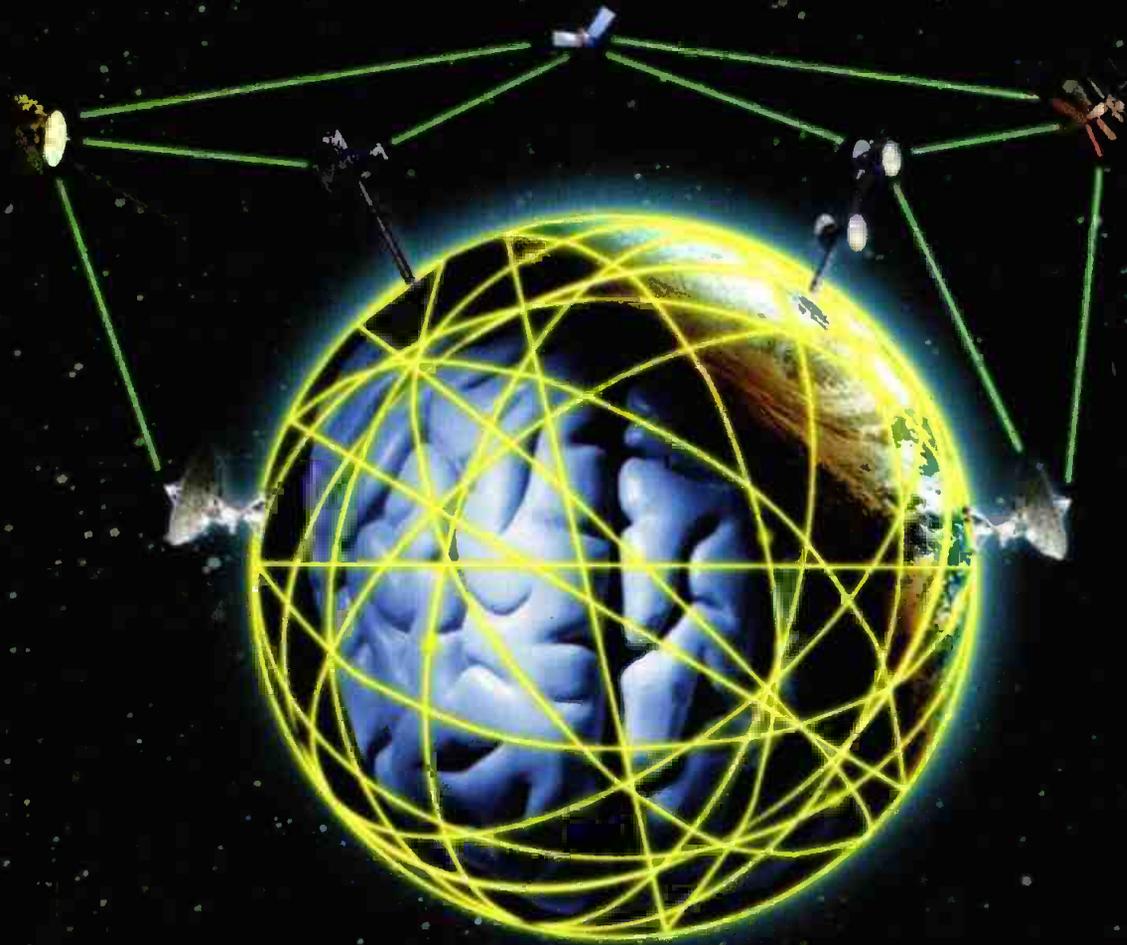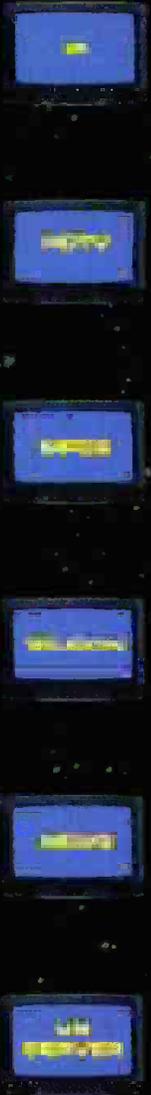

## *think IP @ Leitch*

Video over IP applications are exploding. Leitch is lighting the fuse using our VR™ servers which already run on a fiber channel video storage area network and will now be IP capable for downloading videos and news to the Internet and transporting video content over wide-area networks.

## *think HDTV @ Leitch*

Leitch has stayed the course to bring HDTV within reach of mainstream post and broadcast facilities. We have accelerated our lead by providing the industry with the most complete HDTV infrastructure solutions and expanding our already extensive range of products.

## *think MPEG @ Leitch*

Digital is increasing the use of MPEG-2 technology and Leitch responds with MPEG-2 transport solutions with control, pre-processors, encoders and decoders, including multiplexing and de-multiplexing. Leitch has also expanded the VR MPEG-2 video server line to 4 channels and added 50 gig drives to lower overall storage costs.

## *think silicon @ Leitch*

Leitch is applying video to silicon by taking its current technology assets and selected new video applications into silicon chips using Leitch chip design expertise. By making this silicon available to everyone, Leitch will expand the range and reach of high-quality video.

## *think news @ Leitch*

Leitch dominates the digital newsroom with its NEWSFlash™ non-linear editor built into the VR video servers allowing each editor simultaneous access to all media. By combining edit stations with acquisition and playback channels, we build an integrated all-digital system to meet your time critical needs with streamlined newsroom workflow.

## *think servers @ Leitch*

The Leitch VR video servers offer exceptional reliability and scalability using our VR technology. MPEG versions feature four bi-directional I/O channels in a 4RU frame and can be configurable to more than 40 channels—all with simultaneous access to the video storage area network with a capacity from 250 gigabytes to more than three terabytes.



*think video @*  
**LEITCH**  
[www.leitch.com](http://www.leitch.com)

International/Canada +1 (416) 445-9640, (800) 387-0233 • USA. East +1 (757) 548-2300, (800) 231-9673, USA. West +1 (818/888) 843-7004 • Europe +44 (0) 1483-591000  
Hong Kong +(852) 2776-0628 • Japan +81 (3) 5423-3631 • Australia +61 (2) 9939-3355 • Latin America +1 (305) 591-0611 • Brazil +55 (11) 3151-5073

Circle (103) on Free Info Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)