It's lafayette for... THE BEST.. THE MOST., at the LEAST!

NEW! TRANSISTORIZED POWER Portable Sound Broadcaster

- IDEAL FOR OUTDOOR HAMFESTS
- EFFICIENT HORN PROJECTS SOUND 1000 FT.
- MICROPHONE DETACHABLE
- ON 3 FT. CORD SHOULDER STRAP FOR EASE OF USE

A transistarized power megaphane with many unusual features and many applications. Basically a highly efficient sound projector harn with a built-lin microphane capable of amplifying and projecting the voice with a range of 1000 feet. The microphane is a telephane-type element, easily replaceable, and may be detached and extended up to 3 feet from the harn. The reflex-type harn is extremely light weight, of stardy says aluminum cran is extremely light weight, of sturdy spun aluminum con-struction with a strap for carrying or placing an the shoulder. A press-to-talk switch on the handle provides

MEGAPHONE

for economy of power use-power is used only when actually talking. No warm-up time required—amplification is instantaneous. Has control for setting three different volume levels to suit any environment. A patential non-linear current limiting device restricts current flow to safe levels for langest bottery life. Uses a 9-volt transistor battery. Access to battery can be easily reached by remaving the microphane unit. Size 12½" lang overall; harn mouth is 7½" diam. Shpg. wt., 3½ lbs.

Net 29.50

NEW! "ELECTRO-STRIKE-OMETER"®

- BEST FITTED FOR ALL KINDS OFF-SHORE FISHING
- EASILY ATTACHED TO RODS ACCURATE METER READING



Reg. 12.50

NEW! 10,000 OHMS PER VOLT MULTITESTER

Outperforms Instruments Many Times its Size

- EXTRA LARGE 31/2" METER FACE
- COMPLETELY WIRED (NOT A KIT)
- ALL ACCESSORIES INCLUDED

FULL SCALE RANGES

DC VOLTS: 0-6; 0-30; 0-120; 0-600; 0-1200; AC VOLTS: 0-6; 0-30; 0-120; 0-600; 0-1200; DC CURRENT: 0-120 A; 0-30M; 0-300M RESISTANCE: 0-30K; 0-3 MEG DECIBELS -20 a +63 in 5 scoles; Capacity 50 µµF to .01 µF; and .001 µF to .15U; OUTPUT RANGES 0-6; 0-30; 0-120; 0-600; 0-1200.

0.120; 0.600; 0.1200.

Unbelievable Bergain. Lafayette's new multilester is a camplete factory wired and tested instrument (not a kit). It can be converiently carried in the packet, and features unusually sensitive 10,000 ohms-per-volt AC-DC meter, 1% precision relators, and the largest meter ever placed an an instrument of this size. Single easy-ta-use range selector switch can be appreciated by the novice and the engineer alike. Case and panel are made of durable bake-lite. First capacity range requires 120 valts AC, record range requires 6 volts AC. Probes and floatible leads are plastic caated and calor coded. Size 4½ x 3½ x 1½. Camplete with leads and battery.

NEW! REVOLUTIONARY SPECTA-RADIO®



DIAPHRAM

MERCURY

ON-OFF SW.

- **IDEAL FOR SPORTS EVENTS, OUTDOOR**
- GOOD TONAL QUALITY
- ATTRACTIVE AND LIGHT WEIGHT
- **EXCELLENT FOR** SUNWEAR



- PLUS GERMANIUM DIODE
- SEPARATE VOLUME AND TUNING CONTROLS
- **BUILT IN EARPHONE** JACK FOR PRIVATE

This revalutionary SPECTA-RADIC design is ideal for wearing in ball games, sparts events and any outdar settings. Provided with superior quality glare-proved sunglasses for easy viewing. Its 3-transistar circuit provides high amplification, good toeal quality, and quiet operation. A smooth operating volume control permits F5-201

ANTENNA JACK

TUNING

easy adjustment for different listening conditions. Slide-type dial allows easy tuning. Light and attractive, it is suitable for both men and wamen. Complete with built-in earphone. Shpg. wt., 8 oz.

GOLF RANGE FINDER



- PRECISION 6X LENS **MEASURES FROM 40** TO 250 YARDS
- HANDY POCKET SIZE
- WITH LEATHER

CARRYING CASE

This exciting new Range-Finder is bound to prove an invaluable addition to your Golfing Equipment. Featuring a precision 6X lens capable of measuring from 40 to 250 yards, this hardy packet size instrument enables the golfer by means of a simple focusing adjustment to easily compute the distance to the next hole. Guess work is completibly eliminated and choosing the correct club is greatly simplified. Supplied with suede leather carrying case and simple instructions. Shops. wt., 1/2 lb. F-427 Golf Range Finder

CATALOG

Lafayette 165-08 LIBERTY AVE.

Radio AXtel 1-7000 TILL 8:45 P.M.

Open THUR.

'til 8:45 P.M.

110 Federal St. **HUbbard 2-7850** Open MON.-WED.

Open THUR. 'til 8:45 P.M. **NEWARK 2, N. J.**

PLAINFIELD, N.J. 139 W. 2nd St. Plainfield 6-4718 Open THUR. 'til 8:45 P.M.

NEW YORK 13, N.Y. BOSTON 10, Mass. 100 6th Ave. Worth 6-5300

'til 8:45 P.M. EXCEPT DURING JULY AND AUGLST


OTHER LOCATIONS **BRONX 58. N.Y.**

542 E. Fordham Rd. FOrdham 7-8813

ST-28C

TRANSISTO

24 Central Ave. **MArket 2-1661** Open WED 'til-8:45 P.M.



NEW SCOTT 222 24 WATT STEREO AMPLIFIER



This is a new 24 watt Stereo Amplifier (12 watts per channel) with numerous features found only on more expensive amplifiers. Dual preamps and control facilities provide camplete flexibility in the control and reproduction of all stereo or monoural sources. Outputs are available for stereo tope recording plus a third channel output for connection to another amplifier to provide the ultimate in stereo realism. Loudspeaker output impedances are 4, 8 and 16 ohms for each channel. Inputs: 4 dual (3 high level, 1 low level) Mag High, Mag Low, Tuner, Tape Playback. Outputs: Tape Out (dual) Center Channel (single). Specifications: Frequency response; 20 to 20,000 cpt. Hormonic Distartion; less than 0.8% at 12 watts output; IM 0.3% (CCIF method); att aluminum chassis and DC on preamplifier tube headers result in a hum level of 80 db below full output; Phono sensitivity 3 my for full output; IMs; 13½" wide x 5" high x 9½" deep. Shop.

NEW BOGEN DB212 24-WATT STEREO AMPLIFIER




With this "Steree-Control Center" you can precisely control all stereo sources and feed them through the self content dual amplifiers to your speaker systems. When you use monaural program sources you have 24 wotts of power avoitoble to the speaker system. You can olso feed one channel monocurally through the tweeter and mid-range speaker. Output Power; 24 wotts [two 12 wott channels] peak power 48 watts. Hormanic Distortion: 0.5% of roted output. Frequency Respanses 20 to 20,000 cycles to 10,000 cycles. Controls: 80ss ± 10 db of 60 cycles; Treble ± 10 db of 10,000 cycles. Controls: 4 position selector switch (tape, phono, radio, ous.); Function switch (Monoural: Channel 1, Channel 2, Channels 1 and 2; Stereophonic; normal, inverted). Volume; Boss; Treble; Hi-filter (flat, 4 kc). Loffitter (flat, 100 cps); Speaker (2 position). Power on off switch. Tubes: (9) two 12AX7/7025, two 608, four 6V6GT, one E281. Dimensions: 15" W x 44". H x 12".

BOGEN DB212—Stereo amplifier, less cabinet Net 119,95 — 12,00 Down BOGEN BEG—Pearl-gray cabinet, with legs for DB212 Net 7.50

NEW BOGEN DB230A 60-WATT STEREO AMPLIFIER

SEPARATE BASS AND TREBLE FOR EACH CHANNEL DUAL VOLUME CONTROLS



NEW! Jafayette 50-WATT STEREO AMPLIFIER MODEL LA-250 Impressive Performance...Handsome

Styling . . . Another Unbeatable Lafayette




• 50 WATTS MONAURAL—25 WATTS EACH STEREO CHANNEL • RESPONSE 17-21,000 CPS ± 1 DB (at normal listening level) • UNIQUE "BLEND" CONTROL . PREMIUM EL86 **OUTPUT TUBES • SEPARATE BASS & TREBLE** CONTROLS • CLUTCH-TYPE VOLUME-BALANCE CONTROL • 3RD CHANNEL OUTPUT

COMPLETE

COMPARABLE TO AMPLIFIERS COSTING UP TO

The Stereo



Tape Output jack for recording purposes, plus dual ter-

minotions for 4, 8 or 16 ohm speakers.

Advanced circuitry includes DC operated preamp and tone control tube stamments for hum-free operation, premium 6CWS/EEG6 push-pull output subset, individual bias and balance adjustments on each channel and a

SPECIFICATIONS: POWER OUTPUT: 50 wotts-25 per channel (speech & music rating), FREQUENCY RE-SPONSE: 17-21,000 CPS ± 1 db (at normal listening level), HARMONIC DISTORTION: less than 0.25%. IM DISTORTION: less than 1%. MUM AND NOISE: 74 db below rated autput at full valume (high level inputs), 54 db below rated output at full volume (low level inputs). CHANNEL SEPARATION: Greater than 50 db. OUTPUT IMPEDANCE: 4, 8 and 16 ohms per channel. Attractive beige vinyl lominated steel case. Handsomely

designed brass anadized aluminum front panet. Sienno brown molded legs and matching knobs with polished brass inserts. Dimensions with legs and knobs, 14%" w x 124" d x 5\%" h. Shpg. Wt., 26 lbs.

LA-250 50 Watt Sterea Amplifier 8.95 dawn Net 89.50





NEW! MODEL X-101A STEREO MASTER CONTROL

COMPLETELY NEW! THE FISHER 600 STEREO FM-AM TUNER AMPLIFIER



STEREO MASTER CONTROL

AND DUAL 20 WATT AMPLIFIERS

Features separate Boss and Treble control for either ganged or independent channel operation. Mas 12 inputs or 6 palms for stereo. 3 record-monitor jocks. 8 controls plus six chossis adjustments. Hos input selector (78, LP, RIAA-1, RIAA-2, Tape, Tuner, Aux-1), aux-2); output selector; (Rev., Sid., Channel A + B, Channel B + A); rumble filter; Vol./AC power; channel blance; loudness; separate bass and treble for each channel. Freq. response 20-20,000 cps. Distortion; 0.7% at rated output. 50 db channel separation. Mum and noise inaudible. Sensitivity; 3 mv far phono, 2 nv for tope, 0.2v for high level to obtain rated output. Less cabinet. Size: 15½ x 4½ x 13″. Shgs. wt., 30 lbs.

Net 199.50

Custom cabinets for X-101A in mahagany, walnut, and blande. Size: 15½ x 1½ x 6″. Shps. wt., 6 lbs.

Net 24.95

Model 10U. (Specify finish)

Designed for those who want the convenience of an all-in-one instrument, the new fisher 600 incorperates a complete monoural omplifier was complete monoural omplifier was complete monoural omplifier on one compact chassis. Dual tuning arcangements permit the use of the unit as an individual forcation to the fisher 600. The amplifier section features have well-designed 20 wort amplifiers section features have well-designed 20 wort amplifiers with connections for 4, 8 or 16 ohm speakers. Features indicated in the Tuner: Cascode RF Stage on FM, BridgeHigher S-position input selectors. Sposition Steream Monophanic switch: Dual bass and treble controls; Phase Revers, Monourol Right, Monophanic switch: Dual bass and treble controls; Phase Reversing switch. Dual b

HARMAN-KARDON "EPIC" A-250 STEREO AMPLIFIER



A complete sterea amplifier with two 23 watt channels or a complete monoural amplifier of 50 watts. Specifica tions: Frequency Responser 20 to 20,000 cps; Output level: 25 Wotts per channel at less than 1% harmonic distortion; Peok Power: 50 watts per channel; Hum: 95db below 20 watts on minimum valume; Channel Separation: better than 50db; Tone Central Range: ± 16 db at 50 cps on bass, ± 16 db at 10,000 cps on treble; Damping Factor: 8; Panel Controls: Treble/Power, bass, Leudness, Balance, mode (Stereo Normal, Stereo Reverse, Monoural Right, Monoural Left), Function Selector (Aux 1, Aux 2, Tuner, Phono, tape head), Rumble Filter, Scratch Filter, Cortaur, 2 Speaker Selector switches and Equalization Selector. Speaker autput Impedancess 4, 8, 16 & 32 ohms. Size: 15½ "W x 4½ "N x 13½" D. Shg. wt., 40 lbs. Decart Ponel is copper colored anodized aluminum. Cage is brushed copper with black display ponel.

MARMAN-KARDON A-250 (less cage)Net 179.95 HARMAN-KARDON A-250 (less coge)Net 179.95

LAFAYETTE FOR LEADING STEREO COMPONENTS

NEW! Jafayette 50-WATT COMPLETE STEREO PHONO SYSTEM

The Excitement and Realism of The Concert Hall!



SELECT YOUR OWN CARTRIDGE










STEREO CARTRIDGE STEREO CARTRIDGE

You may substitute any of the above cortridges at no additional cost.

LAFAMETTE

COMPLETE STEREO SYSTEM

YOUR **GUARANTEED BEST** STEREO SYSTEM BUY!



Regular Catalog Price 218.55

You Save 44.05 MF-681, MI-FI STEREO PHONO SYSTEM with choice of cortridge and mohogany, walnut or bland changer base (please specify). Net 174.50 17.45 Down 12.00 Monthly

HF-683. Some as HF-681, but with choice of 2-Lofoyette Eliptoflex Series Bookshelf Enclasures or 2-Lofoyette Cab16 Series Resonator Enclasures (please specify cabinet model and finish.) Shap. W1., 143 lbs. Net 229-95 22,99 Dawn 15,00 Monthly HF-684. Same as HF-681, except speakers furnished are 2-University 312. 12" 3-way speakers. Shap. W1., 67 lbs. Net 237-50 Dawn 15,00 Monthly

MF-685. Same as MF-684, but with chaice of 2-Lafayette Eliptoflex Series Baakshelf Enclosures or 2-Lafayette CA8-16 Series Resonator Enclosures (please specify cabinet model and finish), Shpg. Wt., 143 lbs. Net 294.50

HF-682. STEREO AM-FM-PMONO SYSTEM- Some on HF-681 but including the new Lofayette LT-50 stereo tuner. Shpg. Wt., 85 lbs. Net 287.50 28.75 Down 17.00 Monthly



ALTERNATE ENCLOSURES



harman kardon

HARMAN-KARDON MODEL TA230 STEREO FESTIVAL COMPLETE STEREO ELECTRONIC CENTER

This superb system will odd o new dimension in living to your home with all the excitement and realism of a live concert. The new Lafayette LA-250 50 watt stereo amplifier (25 watts aach channel) forms the heart of this outlanding sterea hi-fi phonograph music system—the features, versatility and advanced circuitry of this unit are second to none—all the necessary inputs and outputs are second to none—all the necessary inputs and outputs ore provided if you wish to add sterea tope and sterea FM/AM later. A unique blend control allows continuously variable channel separation—from full monoural to full sterea. Also included is the famous Garrard RC121/11 intermix 4-speed automatic record changer with full monoural or automatic operation supplied with your choice of sterea cartridge, Pickering 371.7D (.7 mil) diamond sterea cartridge, Pickering 371.7D (.7 mil) diamond sterea cartridge, Shure M7D (.7 mil) diamond sterea cartridge, Supplied with the Lafayette PK-111 wood base cut for the RC121 in your choice of finishes. These outstanding components are coupled with the 2-famous free-edge Lafayette SK-58 12" Coaxial steakers with built-in crossover network and brilliance level constructions. Shpg. W1., 67 lbs.



Here is the most complete unit ever offered on one single chosist. A complete streophonic electronic center, dual preamplifiers with input facility and control for every stereo function fiers with input facility and control for every stereo function including the awaited FM multipler service. Separate sensitive MAM and FM tuners for simulcast stereo reception. New 30 wat AM and FM tuners for simulcast stereo reception. New 30 wat fower amplifier [15 watts each channel) employs four of the power amplifier [15 watts each channel) map on the power of the lottest 7408 autput tubes in self-biosed push pull circuits. Outlottest to a soutput impedance is 8 and 16 ohms. Friction-Clutch tone controls for boss and treble adjustments may be operated either separate boss and for boss and for each channel or conventionally as gauged controls. Telegraphy provides superior fromsient response and Silican power supply provides superior fromsient response and stable tuner performance. Frequency Response — 0.5db 15-stable tuner performance. Frequency Response — 0.5db 15-stable tuner performance. Frequency Control. Sensitivity is discriminator and automatic Frequency Control. Sensitivity is discriminator and automatic Frequency Control. Sensitivity is port of AM and FM, new swivel high Q ferrite loopstick for for AM and FM, new swivel high Q ferrite loopstick for for AM and FM, new swivel high Q ferrite loopstick for the TA230 is beautifully finished with capper escutchean and black display ponel. block display ponel Hormon-Kordon TA230 (less enclosure)

HARMON-KARDON MODEL "LUTE" A220 STEREO AMPLIFIER



An amplifier designed to bring quality component series within the reach of everyone. The "lute" incorporates dual steres preamps and two hum-free, distartien free 10 wort power amplifiers all in one handsome copper and black chassis. Peok power is 2C walts for each channel. The A220 is equally effective as single 20 walt nanoual amplifier; for those preferring to start out with one speaker with the thought of eventually enlarging their system for steres. With the new illuminated push button an/off switch you need only set the controls once—and simply press the button for suserb performance every time. Controls include an extremely effective balance control, separate ganged reliable and bass controls, a ganged dynamic loudness control and complete stereomonoural function switch. Provided are inputs for magnetic phono, crystal or ceramic phono, startfour 2 stereo tope output receptacles and an AC convinence receptacle. Froquency response is 20 20,000 cycles: 1 bb of normal sistening level with hormonic distaction of less than 2% of 10 watts and 5% of 5 worts with readings token et 1,000 cycles. Tube compliment consists of 3 12AX7, 1-12 AU7, 4-7408. Dimensions are 14 et W x 10 %" D x 4 5/16" H (excluding knobs) Shop w, 14 bs.

LAFAYETTE LT-40 DELUXE FM-AM TUNER Specially Priced - Quantity Limited



- ARMSTRONG CIRCUIT
 AFC DEFEAT
- · AUTOMATIC FREQUENCY CONTROL
- TEMPERATURE COMPENSATED OSCILLATOR
- MEETS FCC RADIATION REQUIREMENTS
- FOSTER-SEELEY DISCRIMINATOR

NEW! HARMAN-KARDON MADRIGAL ST350 STEREO TUNER




This latest Harmon-Kardon unit incorporates the most recent advances in stereo-tuner circuitry. The AM and FM front ends ore completely separated for AM/FM simil-cost (stereo) reception. Each section has its own highly efficient electronic bar tuning indicator and with the exception of the tuning function the instrument is aperated entirely by push-buttons. Looking toward the luture, Harmon-Kordon has provided for direct chassis installation of the MA350 Multiplex Adopter. FM section employs an Armstrong circuit with zero time constant Gated Beam Limiter, Faster Seeley Discriminator, Automatic Frequency Control and Cathode Follower Output. Sensitivity of 0.95 microvalts for 20 db quieting, 1.9 microvalts for 30 db permits reception of the most distant FM stations. AM circuitry incorporates on exclusive noise filter for noise-free long distance reception, separate AVC circuit, 10kc whistle Giller, two broad band If stages, and law noise. High Gain RF Pentade followed by a Pentagrid canverer. Included is a built in Ferrite Laopstick with law impedance terminal for external antenna. Finished in attractive brushed capper with block display panel. Dimensions are 15½-WW x 4½-WM x 1724. D. Shg. wt., 26 lbs.

HARMAN-KARDON ST350 AM FM STEREO TUNER 15%"W x 4%"M x 12%"D. Shpg. wt., 26 lbs. HARMAN-KARDON ST350 AM FM STEREO TUNER

CX50 Matching Coge

MULTIPLEX ADAPTER HARMAN-KARDON MA350 COMPATIBLE STEREO



The MA350 is a plug-in stereo adapter designed expressly for use with the \$1350 tuner to provide reception of the new Crosby compatible FM stereo broadcasts. Specifications are essentially the same as the MX20 multiplex adapter, the difference being the MA350 mounts easily within the tuner enclosure with signal and power requirements supplied by the tuner.

plied by the tuner.

HARMAN-KARDON MAJSO MULTIPLEX ADAPTER

Net 49.95

HARMAN-KARDON MX20 SELF POWERED MULTIPLEX ADAPTER



This extremely stable unit is designed for use with tuners which do not provide space and power supply for "plugin" doptors. Completely self powered the MX20 easily plugs into any tuner with multiplex facilities. When switched to Multiplex [4] on MX20 edaper is connected] the compatible stereo broadcast will be heard in full stereo. A convenient stereo dimension control located on the front essutchean is provided for adjusting the degree of stereo to aptimum. SPECIFICATIONS: Output Level 3 volt, Input Level 30 millivalt. Distartion 196 total hormonic distartion maximum, Noise Level —60 db, Crosstalk —40 db and frequency Response 1 db 30 to
15,000 cps. Tubo comptiment 1 EZ-B0, 3-12AU7, 1-12X7,
2-IN34 crystal diades. Supplied less cage, dimensions
ore only 10 "W x 5" H x 6"D. Shags. vt., 12 lbs.
HARMAN-KARDON MX20 SELF POWERED MULTIPLEX
ADAPTOR MC-20 CAGE FOR ABOVE This extremely stable unit is designed for use with tuners


MC-20 CAGE FOR ABOVE

Page 3

NEW REVOLUTIONARY HIGH-FREQUENCY SPEAKER

HE NEW LAFAYETTE Sphericen

HIGH FREQUENCY SUPER TWEETER

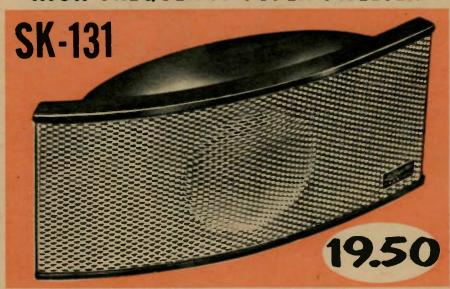

LAFAYETTE Sphericon TWEETER AND ACOUSTIC RESEARCH AR-2 SPEAKER SYSTEM

COMBINATIONS AT MONEY SAVING PRICES

SPHERICON EXTENOS THE RESPONSE OF YOUR AR SPEAKER TO BEYOND 40,000 CPS

AR-2 10" Acoustic suspension speaker and tweeter assembly; 42-14,000 cps. ±5 db; Size 13½" x 11" x 24".

Shpa. wt., 52 lbs.

5Y-339—Consists of Lafayette SK-131 Spherican Tweeter and AR-2 Walnut Flnish

AR-2 Karina (Bland) Finish

Net 113.50

AR-2 Karina (Bland) Finish

Net 113.50

AR-2 Karina (Bland) Finish

Net 113.50

AR-3 Karina (Bland) Finish

Net 13.50

AR-3 Karina (Bland) Finish

AR-4 Karina (Bland) Finish

AR-5 Karina (Bland) Finish

AR-7 Karina (Bland) Finish

AR-8 Karina (Bland) Finish

AR-9 Karina (Bland) Finish

AR-9 Karina (Bland) Finish

AR-9 Karina (Bland) Finish

AR-9 Karina (Bland) Finish

AR-8 Karina (Bland) Finish

AR-9 Karina (Bla

SOLVE THE SPACE PROBLEM WITH

. 6 DB PER OCTAVE ELECTRONIC CROSSOVER WITH LEVEL CONTROL

• SOLID 3/4" VENTED DUCT PORT BOOKSHELF ENCLOSURE

NEW! LAFAYETTE

• FREQUENCY RESPONSE 35 TO 18,000 CPS • UNIQUE 8" WOOFER-MIDRANGE ASSEMBLY

. FOR BOTH STEREO & MONAURAL


• COMPRESSION - HORN TWEETER

At lang last the breakthrough in High-Frequency Speaker design. Here is a tweeter with unequalled performance, speaker is made even less efficient. The Lafayette Spherican represents a complete speaker system with an last in speaker efficiency. As a departure from Electrostatic tweeters, which are extremely result less amplification is needed assuring lower distortant littles on L-pad on the waafer in order to hear the tweeter properly, thereby lowering the efficiency of the form 3,000 cps to beyond 40,000 cps; within plus or waster. In the case of many high compliance low effi-

THE MOST SIGNIFICANT ADVANCE IN TWEETER DESIGN OF THE STEREO AGE

- FREQUENCY RESPONSE FROM 3,000 CPS TO BEYOND 40,000 CPS.
- UNIFORM DISPERSION OVER 120°
 IN ALL DIRECTIONS
- HIGH-SENSITIVITY ALLOWS USE WITH ANY 4-16 OHM SPEAKER
- . UNIQUE DOMED PHONELIC DIAPHRAM

- REQUIRES NO HIGH VOLTAGE OR POWER SUPPLY



ELECTROSTATIC 3 ELEMENT TWEETER

WAS 27.50 NOW



Net 17.50

RECOMMENDED

INSTALLATION ACCESSORIES Select crossover networks and L pads to match impedant

CROSSOVER NETWORK KITS

Consists of cails and candensers and detailed assemble instructions. Shpg. wt., 2 lbs.

KT-128-8 ahm crossover kit (for AR-1, AR-2 & KLH-6
Net 2.75

KT-129-16 ahm crossover kit (for KLH-4)........Net 2.75

LAFAYETTE "L" PAD ATTENUATORS

VC-50-16 ohm. Shpg. wt., 16 oz.

NEVER BEFORE AT THIS SPECIAL LOW PRICE

LAFAYETTE SK-132 12" COAXIAL SPEAKER



CHECK THESE **FEATURES!**

7750

- EXTREMELY FLAT FREQUENCY RESPONSE FROM 35 TO 16,000 CPS.
 - WOOFER FREE-AIR CONE RESONANCE OF 40 CPS.
- 11/2 LB. MAGNET WEIGHT.
- · ABSOLUTE MINIMUM DISTORTION.
- HANDLES 20 WATTS OF CONTINUOUS POWER.
- · PERFECT FOR STEREO

Here is one of the areatest speaker values Lafayette has ever affered. Manufactured of the timest materials—clean, crisp response down to the lowest frequencies with the waster cane utilizing a shallow curved form thereby preventing deteriaration of its superior characteristics resulting from sustained usage. The sturdity built voice coil is made with fluoric bonding agents and easily withstands high peaks. By mounting the tweeter slightly aff center of the wooler, interference between the two are eliminated. Impedance: 16 ohms. Shgg. wt., 13 lbs.

NEW! LAFAYETTE SK-130 8" EXTENDED RANGE HIGH-FIDELITY SPEAKER

Made with typical British craftsmanship—this is one of the sweetest,
smoothest sounding 8" speakers we
have heard. A 15 aunce Alcamax
ring magnet plus a hyperbolic coneore utilized to make it ideal for use
as extension or midrange speaker—
utilizing two—just the thing for
stereo. Capable of handling a full 15 Watts of power and
has a voice cail impedance of 16 ohms. Shpg. wt., 3 lbs.

SK-130 8" EXTENDED RANGE SPEAKER Net 11.95

. I" VOICE COIL

SK-132 12" COAXIAL SPEAKER

"Trioette"—The perfect blending of attractive bookshelf cabinetry and advanced audio design (years ahead a other engineering effarts along these lines). The exceptional smoothness and cleanliness of the bass and midrange is the praduct of a unique 8" woofer-midrange speaker design emplayed in a solid %" occustically lined vented duct part enclosure. Two separate cones are coupled through a common voice cail, with the outer edge of the midrange cane attached and flooting an the flexible corrugated edges of the woofer cane. This results in a mechanical crossover with an absolute minimum of distortion, so that both canes operate in phase at low frequencies, but only the midrange cane transmits the midfrequencies. The heavy magnets provide high efficiency and escellent transient characteristics. Smooth extended high frequencies are brilliantly reproduced by use of a compression harn tweeter utilized with an electronic crassover and level control provided for bolancing the system according to individual listening tostes. Impedance 8-16 ohms. Integrated power handling capacity 20 Wetts, Dimensions, 23" W a 11%" H x 11%" D. Complete with easy to follow speaker installation instructions, SY-353 "TRICETTE" BOOKSHELF SPEAKER SYSTEM UNFINISHED. Net 39.95—anity 3.95 DOWN SY-354 "TRICETTE" BOOKSHELF SPEAKER SYSTEM MANDGANY FINISH Net 42.50—anity 4.25 DOWN SY-356 "TRICETTE" BOOKSHELF SPEAKER SYSTEM WALNUT FINISH Net 42.50—anity 4.25 DOWN SY-357 "TRICETTE" BOOKSHELF SPEAKER SYSTEM SY-357 "TRICETTE" BOOKSHELF SPEAKER SYSTEM BLONDE FINISH Net 42.50—anity 4.25 DOWN SY-357 "TRICETTE" BOOKSHELF SPEAKER SYSTEM BLONDE FINISH Net 42.50—anity 4.25 DOWN NEW! 6½" COAXIAL SPEAKER

- . FOR EXCELLENT HI-FI SOUND . ECONOMICAL & A SPACE-SAVER FOR STEREO
 - RESPONSE SO-16,000 CPS! BUILT-IN CROSSOVER NETWORK

. LARGE, HEAVY MAGNETS

An excellent speaker, with all the best features of coasial design, especially recommended for use in sterea high fidelity systems where space and/or cost are factors. The 6%" wooder is provided with extra-heavy large magnest for good power sensitivity and low distartion, the 2" tweeter is a separate speaker coasially mounted in a housing which completely seals off back radiation and with a mesh dispersion screen to provide smooth, wide-angle-dispersion high frequency response. The built-in electrical crossover



LAFAYETTE SPACE SAVER SPEAKER ENCLOSURE


PERFECT FOR STEREO

FITS INTO BOOKSHELF

ONLY 9.95 EACH

Only careful Lafayette planning can result in such a handy enclosure priced so law! A beautifully built abinet with smooth, shining finish available in mahagan, walnut or strikling blande, this enclosure will match any hype of room decor. Ruggedly constructed of %" wood sides, top and bottom %" wood frant and bock. Sturdy enough to withstand even very high volume levels without vibrating. This handsome enclosure has a thousand and one uses. These units make the ideal two or three-channel stereo system or can be used to supplement existing speakers either as the second channel speaker, or as a center stereo speaker for better balance. Ideally suited as the remate speaker in stereo lable-model phanagraphs. Although meant primarily for stereo use, this enclosure can, of course, be used wherever a small hirfs speaker is desired. Anywhere you use it, you will find its appearance just right. Put it an a booksthelf in the library, an a table or a cabinet in the den or living room, even mount it an the wall. One of the three finishes will motch any room.

Takes a 6" or 6%" speaker for aptimum reproduction of balt laws and highs, has a small part for port-loading \$Y-167-Speaker System.



. THE IDEAL REMOTE SPEAKER



COMPRESSION HORN TWEETER WITH 2 or 3 WAY CROSSOVER

 FREQUENCY RESPONSE 40
 TO 18,000 CPS.
 15 OUNCE HIGH EFFICIENCY
 "ALCOMAX" MAGNET . FLUX DENSITY 13,000 GAUSS



Versatility is the byward in this

Versatility is the byword in this combination of the famous Lafayette SK-105 tweeter and LN-7 crossaver. The Lafayette IN-7 d db per active crossaver may be utilized as a 2-wey at 500 cps or 3300 cps now-and in the future, by the addition of a mid-sport of the state of the stat

SY-364—Combination Tweeter and Crassover System
Net 16.50



ELIPTOFLEX

Brought To You By Lafayette Research—

Engineered To Set A New Standard Of Speaker Enclosure Excellence

 NOW IT IS POSSIBLE TO HAVE ALL THE ADVANTAGES OF A HIGH EFFI-CIENCY SPEAKER IN A BOOKSHELF SIZE ENCLOSURE . NEWLY DESIGNED ELIPTICAL PORT BROADENS FREQUENCY RESPONSE AND PROVIDES BETTER TRANSIENT RESPONSE • NEW DIFFRACTING RING ELIMINATES CANCELLA-TION EFFECTS BETWEEN FRONT AND REAR RADIATION

ELIPTOFLEX

NEW! LAFAYETTE



SK-127 12" COAXIAL **SPEAKER** WITH DUAL WIDE- ANGLE **TWEETERS**

PREQUENCY RESPONSE
40-10,000 CP5
HIGH QUALITY
SEAMLESS CONE
BUILT-IN CROSSOVER
NETWORK WITH
BRILLIANCE LEVEL CONTROL
HEAVY DUTY CONSTRUCTION

HEAVY DUTY CONSTRUCTION
This speaker must be considered as one of the foremast High-Fidelity values today. Its tanal quality and features equal that of speakers many times its price. The woofer section is constructed of a one piece seamless cone with a 1½" vaice coil set in a rigid non-resonant frame. Employing a unique dual cone wide-angle tweeter ossembly (approximately 125" horizontal dispersion angle) which electrically crosses over at 2500 cycles. A brilliance level control is provided making it possible to vary tweeter level according to personal taste. The speaker has an overall frequency response at 40-16,000 cps. Vaite coil impedance 8 ahms. Shg., wt., 8 lbs. 8 ohms. Shpg. wt., 8 lbs. SK-127 12" COAXIAL SPEAKER

SPECIAL COMBINATION

FAMOUS LAFAYETTE-GOODMAN 3-WAY SPEAKER

WITH HIGHBOY OR

LOWBOY CABINET

8.95

DOWN

THE PROBLEM: With the advent of sterea, the use of two massive unwieldy speaker systems became unfeosible in most of today's combination living room—music room areas. One answer to this problem was the air-tight bookshelf speaker systems of which there are many excellent variations. However this design is inherently inefficient and equires costly high wottage amplification. THE SOLUTION: The "Eliptoles" is the latest development from Ladguette's acoustic laboratories, It is the result of an intensive research program to develop a backshelf enclosure that may be utilized with any efficient 17" full range, coaxial or triaxial speaker. It may also be used with a 12" woofer, separate tweeter and crossover. Utilized with a proper speaker the "Eliptoles" ochieves a deglee of natural smoothness coupled with low distortion and a rick, robust bass hitherto found only in large speaker consoles or inefficient bookshelf systems many times its price powered by large amplifiers. With the "Eliptoles" there is no need for costly high wattage amplification due to its highly efficient which consoleristics.

There are two departures from convention which con-

tribute to the excellence of the "Ellptoflex" performance one, the elliptical port, and two, the diffracting ring. The loudspeaker is maunted on a boffle recessed in the cabinet shell with the front-piate extending partially across the front surface of the boffle forming ducts or tubes from the port openings to the autitide air. The elliptical cutout changes the effective length of the duct across its area. This variation in poth lengths provides an extremely smooth transition from duct to free air, broaders the frequency response at which it Is effective and provides better transient response. Mixing the front and rear radiation from the laudspecker diaphragm in this monner produces a truly coasial presentation over the complete frequency spectrum. The tonal unity is such that no separation of source can be detected between high, middle and low frequencies. A triangular shaped diffracting ring mounted on the front of the baffle board virtually elimites undestrable cancellation effects normally produced by close coupling of front and rear cone radiation. The result is a "lens" effect, changing relative particle velocities and consequently, phase relationships so as to produce a smooth transition from front to rear radiation.

Camparative laboratory and listening tests Indicate that "Eliptoflea" performance is demanstrably superfor throughout the audio spectrum.

The "Eliptoflea" is beautifully finished in a variety of hardwood veneers for attractive room placement. Dimensions are 14" H x 23-7/16" W x 13-5/16" D.

CAB-41WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (mahogany) Shaps, wt., 24 lbs. Net 32-50

CAB-43WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (walnut) Shaps, wt., 24 lbs. Net 32-50

CAB-43WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (blonde) Shaps, wt., 24 lbs. Net 32-50

CAB-52WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE (cited walnut) Shaps, wt., 24 lbs. Net 32-50

CAB-44W SET OF WOOD RUNNER FEET FOR CAB-41 (mahogany) Net 1.45


CAB-54W SET OF WOOD RUNNER FEET FOR CAB-41 (mohogany)
CAB-45W SET OF WOOD RUNNER FEET FOR CAB-42 [wolnut]
Net 1,45


(wolnut)

CAB-46W SET OF WOOD RUNNER FEET FOR CAB-43

Net 1.45








	A
les	46
0	





STOCK #	ENCLOSURE	SPEAKER	REG. PRICE	SPECIAL
SY-320WX SY-321WX	CAB-43WX CAB-52WX	UNIVERSITY 312	104.04	89.50 ea. 173.00 for 2
SY-322WX SY-323WX SY-324WX SY-325WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	UNIVERSITY UXC-122	67.29	59.95 ea. 113.00 for 2
SY-326WX SY-327WX SY-328WX SY-329WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	JENSEN M223F	105.00	89.95 ea. 175.90 for 2
SY-330WX SY-331WX SY-332WX SY-333WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE 12TRXB	97.18	82.50 ea. 159.00 for 2
SY-334WX SY-335WX SY-336WX SY-337WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE SP12B	66.80	59,95 ea. 113.00 fer 2










Only 8.95 Down
5Y-338 5K-113 15" with 31/3 lb. magnet 3-WAY
SPEAKER & ENCLOSURE COMBINATION—Net 99.5D
Only 9.95 Down

Now you can obtain what is conceded to be the greatest performance value on the hi-fi market—and save up to 29.50. Available with either SK-111 15" 3-way speaker with 1% 1b magnet or SK-123 Javey with 3% 1b magnet or SK-124 Javey with 1 Javey speakers and by warld renowned Goodmans of England. Supplied complete with genuine 12 db/actore crossover network with L-pad high frequency level control.

IEW! LAFAYETTE SK-125 HI-COMPLI-ANCE 3-WAY SPEAKER SYSTEM


FAMOUS
LAFAYETTE
FREE EDGE
SK-50
12~ COANIAL
2-WAY
SPEAKER.
STOCK #
SK-58WX

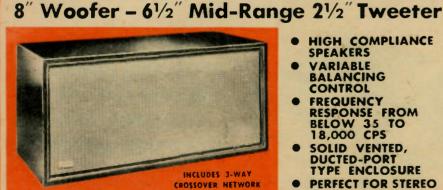

- HIGH COMPLIANCE SPEAKERS
- VARIABLE BALANCING CONTROL
- FREQUENCY RESPONSE FROM BELOW 35 TO 18,000 CPS
- SOLID VENTED, DUCTED-PORT TYPE ENCLOSURE
- PERFECT FOR STEREO

Lafoyette has succeeded in achieving a standard of performance formerly associated only with very large speaker rates advanced Mi-Campliance speaker design in an extra rigid vented, ducted-port type enclasure, lined throughout with acoustic material. The natural, full bass, faithful mid-range and clear sparkling highs are startling from a speaker system of such small proportions. Employing of 3-way LC crossover network with a variable 10-position balancing control, it is possible to motch the speaker system to individual room occustics and listening tastes. Frequency response is from below 35 to 18,000 cps. with a power handling capacity of 25 watts, Impedance 8-16 ahms. Finished on all 4 sides in attractive hand-rubbed mahogany or walnut veneers (please specify). Dimensions are 24"W x 11"H x 10%"D, Shpg. wt., 26 lbs.

SK-125 HI-COMPLIANCE 3-WAY SPEAKER SYSTEM SET OF 2-SK-125 SPEAKER SYSTEMS FOR STEREO



Only 4.95 Down . . . 5.00 Monthly Only 9.80 Down . 8.00 Monthly Net 49.50 Net 98,00

A SMALL MIRACLE FROM LAFAYETTE — THE NEW SK-124

ULTRA-COMPLIANCE MECHANICAL 2-WAY SPEAKER SYSTEM

- FREQUENCY RESPONSE 40-16,000 CPS
- ESPECIALLY DESIGNED VENTED, TUNED. DUCT TYPE ENCLOSURE
- UNIQUE MECHANICAL 2-WAY SPEAKER WITH EXTRA HEAVY MAGNET
- EXCELLENT FOR STEREO



OUTPERFORMS SPEAKERS DOUBLE LAFAYETTE'S LOW PRICE



Lafayette has indeed wraught a small miracle in engineering such acaustic excellence into so small a package. Smaath, distortion free response with a deep fundamental bass and clean pure highs that give no indication of its

smooth, distortion tree response with a deep trundmental bass and clean pure highs that give no indication of its small size and price. The perfect speaker for that high quality installation in your home, office or restaurant—two are ideal for stereo.


The speaker features unique dual cane construction with extra heavy magnets. Both tweeter and woofer "float" on flexible, corrugated edges with the auter edge of the tweeter cane attached to the mid-section of the woofer cone. This results in a mechanical crossover so that both canes operate in phase of law frequencies, but only the tweeter cane operates at high frequencies. The same type of wide-range frequency response normally found only in true cooxial or multiple speaker systems is provided. Frequency response of 40-10,000 cps. Impedance 8-16 ohms. Cabinet is finished on 4-sides in hon-rubbed monkagony and walnut for attractive harizontal or vertical placement anywhere in the raam. Dimensions are 10% "A x 18-7/16"Lx 8-7/16"D. Shap, wt., 15 lbs.

SK-124 MECHANICAL 2-WAY SPEAKER SYSTEM Specify SET OF TWO SK-124 SPEAKER SYSTEMS FOR STEREO

Only 3.40 Down - 5.00 Monthly

AN EXCITING NEW SPEAKER DEVELOPMENT

OUTSTANDING VALUE! LAFAYETTE AUDIO CABLE ASSEMBLIES



A high quality single conductor shielded cable consisting of a straight molded RCA type phono plug at one end with stripped and tinned terminators at the other end, Perfect for interconnecting phonographs, tuners, amplifiers, and high impedance microphones.

M5-573 36" RCA type phono plug to stripped and ..Net .34 M5-574 48" RCA type phono plug to stripped and .Net .36 .Net .39 M5-576 72" RCA type phono plug to stripped and ms-577 144" RCA type phono plug to stripped and



- MOLDED FROM HI-IMPACT PLASTIC
- BRASS SCREW AND SHAFT INSERT
- ACCEPTS UP TO 1/4" ROUND OR FLAT

You'll want these trim distinctive, functionally styled knobs to add a custam or professional appearance to your HI-FI, Ham, Test and Experimental Equipment. Finished in an attractive steel groy and molded from tough hi-impact plastic, the knob is of cylinder-design with sure-grip fluted sides and an aluminum ring-set in a recessed face. Rugged brass screw and mounting shoft insert will accept up to ¼" round or flat shaft. Each kit contains 5 knobs.

K1-56 Size: 1%" Diameter 11/16" Deep Not .79

K1-55 Size: 1%" Diameter %" Deep

K1-57 Size: 1" Diometer 11/16" Deep Not .69

LAFAYETTE SCOOPS THE TAPE RECORDER INDUSTRY THE NEW LAFAYETTE **RK-103 DUAL SPEED**

TAPE RECORDER

PROFESSIONAL QUALITY AT A PRICE YOU CAN AFFORD!






afayette Presents

THE NEW ULTRA-LINEAR SK-128 **FULL RANGE 8-INCH DUAXIAL** SPEAKER WITH NEWLY DEVELOPED TWEETER BAFFLE DESIGN.

■ 40 TO 16,000 CPS—FLAT WITHIN 3 DB ■ HIGH EFFICIENCY - HIGH EXCURSION WOOFER WITH UNIQUE "CONICAL STIFFENER" ■ HANDLES HEAVY **BASS PASSAGES WITHOUT "DOUBLING"**

Eccentric Tweeter Mounting & Unique Elliptical **Baffle Completely Eliminates Interaction** Between Woofer & Tweeter

The SK-128 combines the best features of a multiple speaker system in one compact and economical unit, It offers full, even coverage of the entire audible range, with no distortion or coloration to mor your listening pleasure. The specially treated woofer cone has a unique "Conicel Stiffener" at the apex which, coupled with its high compliance, enobles the cone to operate in a piston-like monner—delivering a clean, powerful bass response. The 2-inch tweeter has its own voice coil and magnetic field. Special treatment of cone and cone edge provides even distribution of the high frequencies, with no peaks or resonances. The unusual off-center mounting of the tweeter and its eliptical boffle minimizes interaction between tweeters and woofer and insures on overall response tree of intermedulation distortion. Electrical crossover from the woofer cone to the tweeter unit is provided by a

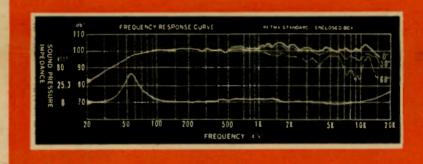

LAFAYETTE MINI-DUCT BOOKSHELF ENCLOSURE WITH SK-128 8" ULTRA-LINEAR SPEAKER

The perfect answer for those who demand realistic sound reproduction even where space is limited. Two of these systems are ideal for stereo.

SY-343WX Speaker System in Wolnut	Net 39.50
SY-344WX Speaker System In Mahagany	Net 39.50
SY-345WX Speaker System In Blande	Net 39.50
SY-346WX Speaker System in Oiled Walnut	Net 39.50
SY-347WX Speaker system in unfinished birch	Net 37.50



TWEETER BAFFLE

CROSSOVER **NETWORK**

CONICAL STIFFENER

19.50

- PUSH-BUTTON CONTROLS DUAL SPEED TWIN SPEAKER
- TAPE INDEX COUNTER WIDE RANGE FREQUENCY RESPONSE
- . SIGNAL TO NOISE RATIO BETTER THAN 40 DB

Net .89

. WOW AND FLUTTER LESS THAN D.35%

Lafayette has it! We are not at liberty to divulge the nationally famous name of this instrument's manufacturer, however, we are confident that its features will speak for themselves—ruaged fool proof push-button controls for play, record, rewind, forward and stop. Automatic interlacked switching makes it impossible to accidentally erace, spill, or break tope. Dual speeds—7% and 3% jps. Record level indicator to facilitate recording. Fast forward and rewind—1200' in 80 seconds. Accepts 7" reel size. Twin

motched speakers for 300° sound distribution. Tape index counter. Provision for connecting to external speaker and external amplifier. Input jack for your Rodia-Phono or T.V. Complete with microphone, 600 ft. of tape and extra reel. Attractively finished in black and white scuff-resistant pyraxyllin material. Dimensions are 14" H x 14" W x 10" D. Ships. wt., 33% lbs.
RK-103 LAFAYETTE DUAL SPEED TAPE RECORDER y.00 Down 8.00 Monthly

20,000 OHM PER VOLT MULTITESTER

- 20,000 OHMS PER VOLT DC SENSITIVITY 10,000 OHMS PER VOLT AC SENSITIVITY
- 40 MICROAMPERE 3" D'ARSONVAL METER

• HIGH INPUT

MOVEMENT
HIGH INPUT
RESISTANCE
ON ALL DC
AC RANGES

AC RANGES

ON INPUT
RESISTANCE
ON ALL DC
AC RANGES

ON ALL DC ONLY 13.50



STEREO AUDIO **ANALYST SINGLE** NEEDLE - DUAL CHANNEL VU BALANCE METER

UNIQUE TWO COIL GALVANOMETER TYPE PRECISION METER MOVEMENT • SEVEN RANGES
OF METER SENSITIVITY • EFFORTLESS BALANC-ING OF STEREO SYSTEMS • PROVISION FOR USE AS VU METER AND TAPE RECORDER LEVEL INDICATOR • MAXIMUM METER SENSITIVITY 120 va

NEW GENERAL ELECTRIC STEREO AMPLIFIERS



MODEL MS-2000 "STEREO CLASSIC" 28-WATT STEREOPHONIC AMPLIFIER

28-WATT STEREOPHONIC AMPLIFIER
This integrated stereo amplifier combines high quality stereo performance with striking cabinet design. Consists of 2 power amplifiers and 2 preamp control units on a single chassis. Front panel controls include: input selector—stereo tape head, monaural phono, stereo phono, stereo tuner, auxiliary; Speaker mode selector-stereo, channel reverse, monaural; Volume; Contour; Balance; Bass; Treble; Rumble filter; Power on-off; Tuner level set. Inputs (with sensitivity figures): Stereo Cartridge (3.5 mv); Tuner (200 mv); Auxiliary (200 mv). Outputs: Dual speakers—4, 8, 16 ohms; Dual output jacks; 2 a.c. outlets, one controlled. Power Output: 28 watts total, 14 watts per channel in stereo operation. Frequency Response: 20 to 20,000 cps ± 0.5 db. Harmonic Distortion: below 1% stereo operation, at full output. Hum and noise: —55 db (phono); —73 db (high level). Channel Separation: at least 40 db between 30 and 20,000 cps. Tubes: 2-7025/12AX7; 2-12AX7, 2-68A8A; 4-6V6GT; 1-5V4GA; 1-full wave selenium rectifier. Cabinet finished in leather grain willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features a silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and willow gray vinyl, Front panel features as silver and



MODEL MS-4000 "STEREO CLASSIC" 40-WATT STEREOPHONIC AMPLIFIER

New compactly designed stereo amplifier, carefully engineered to fulfill the need for a top quality unit at a modest cost. Output power is rated at 40 watts total; 2C watts per channel in stereo operation. Frequency Response; 20 to 20,000 cps ± 0.5 db. Harmonic Distortion below 1% at full output, stereo operation. Hum and Noise; —62 db (phono); —73 db (high level). Channe Separation: better than 40 db between 30 and 20,000 cps. Front Panel Controls include; Input selector—stereo tape head, monaural phono, stereo phono, stereo tuner auxiliary; Speaker mode selector—stereo, channel reverse, monaural together; Volume; Contour; Balance Bass; Treble; Rumble filter; Power on-off; Tuner lever set. Also a rear panel speaker phasing switch. Inputs (with sensitivity figures): Stereo cartridge (3.5 mv); Stereo tape head (3.mv); Monaural cartridge (3.5 mv);

Model MS-4000
Model MS-4010 Same as MS-4000 but with cabinet fished in saddle-brown vinyl and panel in brown and gold ished in saddle-brown vinyl and panel in brown and gold Net 176.23




MODEL RG-1000 "STEREO CLASSIC"

REMOTE CONTROL UNIT

Provides the important stereo central remote control functions of channel balance and volume control—up to 30 feet from the controlled amplifier, Idealfy suited for use with the GE MS-4000 or MS-2000, or as a remote volume control with a monaural amplifier, or for volume and balance control with a pair of monaural amplifiers used for stereo. Superb styling with ebony-finish base and knobs, textured aluminum face plate, and chrome trans. 5½" w x 2½" d x 1¾" h, with 3D-foot output catile. Shpg. wt., 2½ tbs.

Shpg. wt., 21/2 lbs. GE RG-1000 Remote Stereo Control

NEW GENERAL ELECTRIC FM-AM TUNER MODEL FA-12



The new GE Model FA-12 FM-AM Tuner offers an unusual combination of excellent audio performance and trim, highly-compatible oppearance design, for use with Air-tually any amplitier in a custom high fidelity system. "Visitumer features high sensitivity, precision tuning, obility to receive week signals with minimum distortion, and an usu-sually low hum and noise level. Front Panel Controls: Tuning (filtywheel), Selector switch with Off, AM, FM, FM (AFC) positions. Specifications: AM Sensitivity-200 µV per meter for 20db signal-to-noise ratile, FM-5yV for 32db quieting. AM Selectivity—7kc bandwidth, 6db dawn; FM—200kc bandwidth, 6db dawn; FM—200kc bandwidth, 6db dawn; FM—5yM-6v3-5db below 100% modulation—1st han 2% Molse—FM, 55db below 100% modulation—1st han 2% Molse—FM, 55db below 100% modulation. Response—FM, ±2db of the standard de-emphasis curve; AM, 23db down at 10km to minimize whistic interference. Audio Outputs—3 kew impedance cathode follower type; I high, I low, I Multiplex. Antenna Inputs—FM, 300 ohm (folded dipole antenna supplied), AM, bulli-in ferrite rod antenno, terminal for external antenna. FM driff is negligible with AFC, and spurious radiation ertified as meeting. FCC requirements. Tuning Range—TM, 88 to 108mc; AM, 533 to 1620kx. Tuning Meeter—Jual purpose for practise FM center tuning and AM maximum signal tuning. Overall dimensions—15-1/32" W x 5 V N M at 10% D. Shgg. vt., 15 lbs. For use with 110-120 onto 00 cycles AC.

Model FA-10 (soddle brown vinyl cobinet with b gold faceplate)

"COMPATIBL PHONO MUSIC SYSTEM

STEREO and LP MONAURAL

Plays Stereo and Monaural Records

LAFAYETTE SUPER-VALUE HIGH FIDELITY "TWINS"







NEW! FM TUNER Ready for Stereo!

47.50 WITH CAGE

ONLY 5.00 DOWN - 5.00 MONTHLY

■ MULTIPLEX OUTPUT FOR FM MULTIPLEX STEREO ■ NEW EM80/6BRS "PIN-POINT TUNING" EYE . FULL ARMSTRONG FM CIRCUITRY . DRIFT-FREE AUTO-MATIC FREQUENCY CONTROL . 444 FM SENSITIVITY

Nat 47.50

NEW! LA-45 14-WATT AMPLIFIER 39.50 Only 5.00 Down!

The Lotoyette LA-45 is a complete 14-wolf amplifier with built-in preamplifier equalizer with wide rongs frequency response and low hum and distortion to ensure sparkling reproduction that will delight you. This undistorted power is achieved from circuitry employing the new premium quality El84 tubes in a peniode-connected bolanced output circuit. 5 inputs are provided for every type of crystol, ceromic or magnetic phono cortridge, for tuner and tape head as well as high level auxiliary input. The front ponel function selector and equalization switch gives instant choice of tuner, our, or phono with proper equalization for all types of records, and tope head. Equalization positions or RIAA (IP), POP for 78 pm records, and NATB tope head equalization. A "Monitor" lack and switch permit tope monitoring, provide a high level signal for lope recording, or allow plug-in use of the new stereo adapters. Other features include a 12 db per active rumble filter, on auxiliary AC receptacle, provision for mounting in cobinet or an account of the new stereo mounts have mounting in cobinet or an account of the new stereo mounts have mounted to the provision of the new stereo mounts of the new stereo mounts of the new stereo magnetic stereous considerations. September 17.75 tuner, it cames complete with removable case.

SPECIFICATIONS

SPECIFICATIONS

POWER: 14 waits normol, 28 worts peok. FREQUENCY RESPONSE: 30.20,000 cps ± 1 db. 1M DISTORTION: Less than 1½% (60 and 7000 cps) at full output. MUM: Tuner 80 db, phono 60 db below full output. INPUTS: Crystal phono, tuner, magnetic phono, tope head, oux. OUTPUTS: Monitor, speaker (8 and 16 ahms). CONTROLS: Function selector and equalization, boss, treble, loudness with AC an-off switch, monitor an-off switch, rumble filter on-off switch. RUMBLE FILTER: 12 db per actore below 100 cps. EQUALIZATION: RIAA (LP), POP (78), TAPE HEAD (NARTB). TONE CONTROLS: 12 db cut or boost on boss or treble. INPUT SENSITIVITY: For full autput: ½ valt for tuner, crystal ar aus; 2.7 millivalts for magnetic phono or tapheod. DAMPING FACTOR: 10, TUBES: 2.72AX7, 2.E184; E281 (rectifier). AC OUTLET. MOUNTING: Cobinet or ponel. SIZE: 13½" long x 6½" d x 4½" h including bumper feet. Knobs extend ½" in front of panel. SHIPPING WEIGHT: 15 lbs. 39.50 Net 39.50 LA-45-14-wott omplifier

MONAURAL SYSTEM TO PLAY BOTH STEREO AND MONAURAL RECORDS

COMPONENTS

CONVERT TO COMPLETE STEREO LATER LAFAYETTE LA-45 14-WATT COMPLETE AMPLIFIER GARRARD RC-121 4-SPEED RECORD CHANGER NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE LAFAYETTE SK-58 12" COAXIAL SPEAKER 29.50 3.95 LAFAYETTE PK-111 WOOD BASE 139.05 HIGH FIDELITY PHONO SYSTEM Play Stereo & Monaural Records, Monaurally, Now-

REGULAR PRICE 139.05

Add Complete Stereo Later YOU PAY 107.50 **SAVE 31.55** ONLY 10.75 DOWN-10.00 MONTHLY An economical high fidelity system with autstanding performance features for highly-satisfying tone quality. It's all ready for stereo; conversion will invalve only a few easy interconnections. Includes the new Ladoyette LA-45 14-Wat amplifier, with frequency response of 30-20,000 cps. and with "Monitor jacks for plug-in use of a stereo adapter when desired; the Gorrard 4-speed automatic record changer Model RC-121/II all set for stereo whenever you're ready: The new GE VRZ2 (.7 MIL) Diamond Stereo Cartridge engineered for virtually hum-free performance with a frequency response from 20 to 20,000 cycles. For both stereo and micrograave IP and 45 rpm records; the Lafoyette PK-111 wood changer base, of fine, selected veneers; and the world famous Lafayette SK-58 cooklal 12" speaker with "Brillonce" high-frequency

SELECT YOUR OWN CARTRIDGE

You may substitute the Shure M7D, Pickering 371.7D or the new Electra-Voice 31MD7 in any system shown with the GE VR-22 of no additional cost.

COMPLETE HARMAN-KARDON FM-AM STEREO-PHONO SYSTEM 50-Watts (25 Each Channel)



HARMAN-

KARDON HK250 50 WAT STEREO

CHANNELL

1P200 STEREO TUNER & CONTROL CENTER


CA8-16 or CAB-17



TRIAXIAL SPEAKERS



GE VR-22 (.7 MIL) STEREO



ELIPTOFLEX ENCLOSURES

SPECIALLY PRICED! SAVE OVER 30%

HARMAN-KARDON TP200 STEREO TUNER & CONTROL 189.95 HARMAN-KARDON HK250 50 WATT STEREO

AMPLIFIER (25 EACH CHANNEL) 99.95 GLASSER-STEERS GS-77 (less base) 59.50 GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 24.45 2-UNIVERSITY 312 TRIAXIAL SPEAKERS @ 71.54 ... 143.08

Regular Cetalog Price 516.93

YOU SAVE 127.43 YOU PAY

389.50 38.95 Down

24.00 Monthly

HF-630 Stereo system as illustrated. Shpg. wt., 85 lbs. Net 391.95 Recommended enclosures for the HF-630 system or the: Lafayette Eliptoflex series Bookshelf Enclosure or CAS-16 Series Resonatar Enclosure. Set of 2 57.50

(Please specify finishes).

(Places specify tinishes).

MF-631 some as MF-630, but with 2-Lafayette SK-114
12" with 6½ lb. magnet 3-way speakers and 2 Lafayette
Eliptoflex Series Enclosures. Shpg. wt., 133 lbs. Shpg. wt., 133 lbs. Net 487.95 48,79 Down 27.00 Monthly

GO STEREO NOW! Super-Fidelity Easy Build Kits

TEICO HI-FIKITS

NEW! EICO STEREOPHONIC



PREAMP

HF85 Same, factory wired & tested

Model HF-81K STEREOPHONIC



NEW! DUAL AMPLIFIER-PREAMP

Only 69.95

A handsame camplete hi-fi stereaphanic cantral center with

Model HF-81 As above but wired

Not 109.95



NEW! -EICO

FM TUNER **HFT-90**

KIT \$39.95

Wired \$65.95

Cover \$3.95

Newly-designed, extremely sensitive, low-noise "front end" supplied in a cast housing completely pre-wired, pre-aligned, ready to use. This new front end, for the first time makes it completely practical even for a novice to build an FM tuner equal to really good professional factory-wired units. Employs the broad-band detector circultry used in \$169 FM tuners now on the market. Temperature-compensated components and advanced circuitry completely eliminate need for AFC. Orift is less than 2 parts in 10,000 from cold start. Sensitivity is 6 times greater than other kit tuners and equals that of the most expensive wired tuners; it is 1.5 uv for 20 db quieting Radiation suppressed far below FCC standards. Also features new DM-70 traveling tuning eye. Input 300 ohms, IF bandwidth 260 kc, detector separation of 600 kc. Freq. resp. 20-20,000 cps ± 1 db. Audio output 1 V for 10 uv input with 75 kc deviation. Hum 60 db below 1 V. Cathode follower and multiplex outputs. Flywheel stiderrule tuning, AGC, stabilized low limiting threshold for excellent performance from weaker signals, broad-band ratio detector for improved capture ratio and easier tuning, full-wave rectifier and heavy fiftering, very low distortion. Uses 1-ECC85/6AQ8, 3-6AU6, 1-6AL5, 1-6C4, 1-DM70, 1-6X4. Flexible "low silhouette" design adaptable to any panet thickness for console installation; optional cabinet. MWD: 35% x 12" x 8V4". Operates from 110-125 VAC. 60 cps line.

HFT 90K FM TUNER KIT (less cover)

Net 39.95 HFT 90 FACTORY WIRED AND TESTED TUNER Net 65.95 E-3 Cover for obove

12-WATT WILLIAMSON-TYPE HI-FI AMPLIFIER . . . PREAMP ... CONTROL SECTION



COMPLETE KIT 34.95

Compact, attractively styled amplifier with complete front end facilities and true high fidelity performance. Direct tape head and magnetic phano inputs with NARTB (tape) and RIAA (phano) feedback equalizations. Dual triode circuit for variable turnaver bass and treble feedback-type cantrals. Power autput: 12 watts continuous, 25 watts peak. Intermodulation distartion 1.5% at 12 watts, 0.55% at 6 watts, 60 to 6000 cps. Frequency response: 12-50,000 cps ± 0.5 db at 1 watt, 25-20,000 cps ± 0.5 db at 1 watt, 25-20,000 cps ± 0.5 db at 12 watts. 4 Controls: Selector switch, level control. bass and treble controls. Speaker connections for 16, 8, and 4 ahms. Tubes: (2) ECC83/12AUT, ECC82/12AUT, 12) EL84, EZ81. Size: 3½" M, 12" W, 81¼" D. Shpg. wt. 13 lbs. With instructions.

HF12K-Complete Kit Net 34.95 HF12 -As above, factory wired......Net 57.95

Wette STEREO TUNER KIT

THE STEREO-TUNER IS YEARS AHEAD

KT-500

IN KIT FORM LT-50



ONLY **\$7.4**5

DOWN

\$8.00 MONTHLY

124.50 COMPLETELY WIRED AND TESTED THE LAFAYETTE STEREO-TUNER IS UNIQUE AND INCOMPARABLE

More than a year of research, planning and engineering went into the making of the Lafayette Stereophanic Tuner. Designed against absolescence, it incarparates every practical and worthwhile feature that is considered necessary far your complete sofisfaction of all present and future types of broadcasting. Already, breathtaking stereophanic pragrams are being transmitted via FM and AM. It will certainly become more and more the oppular method of high fidelity broadcasting. The tuner also provides an output for multiplex FM stereophanic reception, enabling you to enjoy the ultimate in high-fidelity sound reproduction. Since the FM and AM sections are completely independent of each other, this tuner can be used furthermore as a dual-monarul tuner. In this way, the music lovers are able to listen to concert pragrams on the FM channel in one roam, while the younger-set can listen to a different pragram on AM in another roam. In addition, on a manaural pragram which is broadcasted simultaneously via FM and AM, this tuner will enable you to tune in both channels and reproduce them through individual amplifier-speaker systems. The improvement of quality will be immediately noticeable because the sound source's now distributed and at the same time, the hole-in-the-wall point source effect is campletely eliminated. Of cause, the unit can also be used as on ordinary type of FM-AM tuner, providing you with unsurposed quality of reception.

Apart from its unique flexibility, this is, before all else, a superior high-fidelity tuner, employing many features found only in the highest priced units. An inspection of the tubes and parts used will reveal that this tuner is engineered without compromise of any kind. With the Lefayette Sterea-Tuner you are assured of noise-free, drift-free, distortion-free performance. You will not only hear this, quality, but also sense it even in the mechanical details; in the "feel" on the velvet-smooth easy flywheel tuning, in the professional appearance of the tostelly selected colors that wil

THE MOST FLEXIBLE TUNER EVER DESIGNED!


Use it as a Stereophonic FM-AM Tuner

Use it as separate Monaural FM & AM Tuners Use it as straight Monaural FM or AM Tuner

● MULTIPLEX OUTPUT FOR NEW STERED FM ● TWO PRINTED CIRCUIT ■ MULTIPLEX OUTPUT FOR NEW STERED FM — TWO PRINTED CIRCUIT
BOARDS AND IF'S PREALIGNED — FM AFC AND AFC DEFEAT → TUNED
CASCODE FM FRONT END — 17 TUBE PERFORMANCE — 11 Tubes (4
dual-purpose) → Tuning Eye & Selenium Rectifier — ARMSTRONG
CIRCUIT WITH DUAL LIMITERS AND FOSTER-SEELEY DISCRIMINATOR
12 TUNED CIRCUITS AND DUAL CATHODE FOLLOWER OUTPUTS

■ EXTREME SENSITIVITY AND WIDE FREQUENCY RESPONSE

• THE MOST FLEXIBLE TUNER EVER DESIGNED!



Use It as Use it as separate Manaural FM or AM Tuner SPECIFICATIONS RANGE: FM 88-108MC, AM 530-1650KC, FM CIRCUIT: Armstrong, low noise front and with triode grounded grid amplifier and triode mixer. Double tuned died limiters, Foater-Seeley discriminator, AFC and AFC defeat. AM CIRCUIT: Superieth with 3 stopes AVC, 10kc whistle filter, ferrite antenno. DISTORTION! Under 1% hormonic on FM; under 1% on AM for up to 80% modulation. HUM LEVEL: 00 db below 100% modulation. SENSITIVITY: FM—full limiting on signals on low at 1 µv, 2 µv for 30 db quieting; AM Terminal Sensitivity 5 µv. SELECTIVITY: FM 200kc bondwidth; 6 db down, AM 8kc 8W; 6 db down. FREQUENCY RESPONSE: FM 20-20,000 cps ± ½ db, AM 20-5,000 ± 3 db. FM DRIFT; ± 5kc Maximum. IMAGE REJECTION: FM 40 db; AM 30 db, 1.P. REJECTION: FM 70 db; AM 50 db. RADI-ATION: MEETS FCC REQUIREMENTS. OUTPUT LEVEL: FM 2½V for 100% modulation, 1V for 30%; AM average 1V. CONTROLS: 5 confrols; FM VOL, AM VOL, FM Tuning, AM Tuning, and five position function selector switch. TUBES: 3-6864; 2-6406. 1 each 6875. 6CC65, 6AL5, 68E6, 12AU7 and 6U5 tuning eye. Selenium rectifier. OUTPUT IMPEDANCE: Low impedances cathode follower. Output lacks for FM, AM or Sierec. ANTENNA IMPUT; 300 chms. Size, 13½" W x 10½" D x 4½" M. Shpg, wt., 18 lbs. Kit comes camplete with all parts and metal cover, a step-by-riep instruction manual, schematic and pictorial diagrams.

Not 74.30

LT-50WX Same as above, completely factory wired and tested.

LAFAYETTE OFFERS THE FAMOUS KT-300 PREAMP KIT AT A SPECIAL SUMMER PRICE - OFFER EXPIRES SEPT. 15, 1959



LAFAYETTE MASTER AUDIO CONTROL CENTER with BINAURAL CHANNEL AND DUAL VOLUME CONTROL

This is not only the finest hi-fl preomp characterized by unmatched features, but it has been functionally designed to keep pace with the conversion of your present hi-fl system to binourol (Stereophonic) sound. Incorporates an extra channel and dual valume control for binourol reproduction. Features include DC on all tube filaments, negative feedback in every stage, dual cathode follower output stages and latest printed circuit construction. Less than 0.09% IM distortion and less than 0.07 hormonic distortion at 1V. Hum and noise level better than 80 db below 3V. Uniformly flat frequency response over entire audible spectrum. 7 inputs for every type of phano, tuner or take. Tosteful styling, brilliantly executed. Size 12½ × 2½ × 3½.

KT-300-Lafayette Master Audia Control Kit Complete with cage and detailed assembly in

LT-30—Same as above completely wired and tested with cage and instruction manual,

DELUXE 70 WATT BASIC AMPLIFIER

**Conservatively Rated At 70 WATT BASIC AMPLIFIER

**Conservatively Rated At 70 Wats a laverse feedback ** Variable Demping
**Metered Balance And Bias Adjust Centrals ** Available In Kit and Wired Ferm
Here's ultra-stability In a 70 watt basic power amplifier employing highest quality components
conservatively rated to lasure performance and long Iffs. Features matched par KT 88's and
wire range linear Chicage output transformer, variable damping control, meter for bias and
balance and gold finish chassis. Frequency response 10-100,000 cps ± 16b. Hum and noise
90 db below full output. IM distartion less than 1½% of 70 wats, less than 0.3% below 30
watts. Harmonic distortion less than 2% of 70 wats from 20 to 20,000 cps ± 16b. Output
impedance 4, 8 and 16 ohms. Handsome decorative cage perforated for proper ventilation.
Size 14½ x 10:x 7½ including cage and knobs. Shap, wt., 40 lbs.

***EADO-Lafancete 70 wats Deluga Ratic Analisa.**

KT-400-Lafayette 70 watt Deluxe Basic Amplifier Kit complete with cage and detailed

LA-70-5ame as above completely wired and tested with cage and instruction manual.

SAVE SWITH Lafayette & TEICOL

CONTROL CENTER With All The Versatility Of A Broadcast Studio Control Console

0000 KT-600 LA-600 Futurama

■ A GIANT FORWARD STEP IN PREAMPLIFIER DESIGN! ■ UNIQUE STEREO & MONAURAL CONTROL CENTER FACILITIES & OUTSTANDING PERFORMANCE SU-PERIORITY! WITH AMAZING NEW BRIDGE CIRCUITRY & CONTROL FOR VARI-ABLE 3d-CHANNEL OUTPUT FOR 3-SPEAKER STEREO SYSTEMS! O VARIABLE CROSS-CHANNEL SIGNAL FEED FOR ELIMINATION OF "HOLE-IN-THE-MIDDLE" EFFECTS WITH STANDARD 2-SPEAKER STEREOL MIGHLY PRECISE "HULL" BALANCING & CALIBRATING SYSTEM PROVIDES MORE ACCURATE STEREO BALANCE THAN METERS

THE LAFAYETTE KT-600 SOLVES EVERY STEREO/MONAURAL CONTROL PROBLEM

In Latoyette's constant effort to bring you the very lotest and most advanced developments in electronics—
and particularly in high fidelity— of prices everyone can offard, Lateyette went to the most forward-looking experienced brains in the electronics/high fidelity industry and tes now DARED to produce what we think is the MOST REVOLUTIONARY DEVELOPMENT IN STEREO HIGH FIDE ITY— A BRILLIANT NEW ACHIEVEMENT— THE LAKAYETTE KT-000 STEREO MASTER AUDIO CONTROL CENTER!


The KT-60C provides 4 shall concentric input level controls for belanced use of different types of program sources; — such as AM and FM thures, tape recorder with microphone, phonograph plus microphone, etc., and without overloading inputs; 3 controls are for high level input and a separate level control is provided for the our put of the preomptifer stage. The KT-600 provides separate turnover and rolloff dual concentric switches for 24 passible positions of accurate equalization on each channel; equalization on each channel; equalization on each channel and the control of the other. Furthermore, all imputs can be variably mixed, monourelly, are will [mike with phono, tope recorder with phono, at.]. The Bridge Control permits cross-thannel feed or optionally acts as a volume control for the 3d channel (Bridge) autput to eliminate "ping-pong" or "hole-in-the middle" effects. An audible, sharp, occurate "null" (dip in sound output) is previded by a "Calibrate" pasition of the Storee Function Switch working in conjunction with the clutch-type Bolance Controls for precise steep balance — highly important for good stereo performance. The 3d channel europut can also serve for mixing any stereo program (storeo record, tape, AM/FM stereo) to produce excellent manureal recordings or to play a stereo program manouvally through a separate amplifier and speakers to make any positions of the frequency spectrum, and to correct speakers connected out of phose. Channel recordings is meetimes found commercially, in which ther is a loss of some portions of the frequency spectrum, and to correct speakers connected out of phose. Channel recordings is present for correct positioning of stereo music to the right or to the left — and this may apilonally be accompanied by phose reversal for best overcal stereo sound. The KT-600 has a Presence Rise Switch which pulls a solo instrument out of the general music all backgreend with minimum disturbance of orchestral balance.

AND STILL OTHER PROFESSIONAL FEATURES OF LAFAYETE'S KT-600 ARE; Tape head equalization for the new 4-track sterce lapes; Mazier Gain Central for individual or simultaneous adjustment of channel levels, inputs for constant velocity (magnetic) and constant amplitude (ceramic, trystal or capacitive) phono certridges, all equalized by the Rolloff and Turnover selector suffices; individual channel concentric base controls and concentric trable controls which permit pre-satting for good steres toact balance and malmelning that balance of other tone control estings; tene control circuits were 5%-tolerance components and 2½%-tolerance precision potentiamenters for occustate centering of their "Mid" positions; suffiched rumble and scratch fillers; switched Fletcher-Munson loudness contour compensation; tape mainter output jacks and tape Monitor-Play switch permit monitoring with recorders having special mentior heads and preemplifiers and obso permit o traveral mention heads and preemplifiers on be permanently connected to the KT-600 for recording and playback; "plate follower" output switch extremely low disterion; special low-flux power transformer and DC operation of all fillaments for exceptionally low hum and coal aperation, tow-noise deposited metal-film resistors and 7 of the new premium low-noise type 7025 tubes are used for extra-good signal-to-noise ratio. The KT-600 has printed circuit board construction for ease of wiring and max mum performance stability.

PRECISION "NULL" STEREO CALIBRATION & BALANCING CONTROLLED CROSS-CHANNEL SIGNAL MIXING ● THIRD CHANNEL CONTROLLED OUTPUT ● CONTROLLED MONAURAL MIXING OF ALL INPUTS ● 24 SEPARATE

EQUALIZATIONS ON EACH CHANNEL . MONAURAL RECORDING OR PLAY WITH STEREO SOURCES

● 6 CONCENTRIC FRONT-PANEL CONTROLS ● 4 CONCENTRIC REAR-PANEL INPUT LEVEL CONTROLS ● SWITCHED FLETCHER-MUNSON LOUDNESS CONTOUR COMPENSATION PARALLELED OR SINGLE CHANNEL AMPLIFIER DRIVE WITH MONAURAL SOURCES • 180° PHASE REVERSAL • CHANNEL REVERSAL WITH OR WITHOUT PHASE REVERSAL



PERFORMANCE SPECIFICATIONS FOR SUPER-STERFO

● RESPONSE 10-25,000 CPS - 0.5 DB ● TAPE HEAD PLAYBACK EDUALIZATION FOR NEW 4-TRACK STEREO • LOW LEVEL SENSITIVITY 1.78 MILLIVOLTS FOR I VOLT OUT — HIGH LEVEL SHISTIVITY 67 MILLIVOLTS FOR I VOLT — SWITCHED 12 OB/OCTAVE RUMBLE & SCRATCH FILTERS — LESS THAN 1.03% IN DISTORTION — DUAL TAPE MONITOR JACKS & SWITCH FOR RECORD & PLAYBACK — DUAL IMPUIS FOR STREED MONAURAL CRAMIC, CRYSTAL OR CAPACITIVE PICKUPS WITH FULL USE OF EQUALITATION SELECTORS. DIGNAL-TO-NOISE ETTER THAN 80 OR AT HIGH LEFTLE & 62 OR AT LOW LEFEL INPUTS FOR I VOLT OUT 6 "PRESENCE" SWITCH FOR SOLO PROJECTION . BASIC CONTROLS ALL CONCEN TRIC - "PLATE FOLLOWER" OUTPUTS FOR LOW IMPEDANCE WITH LOWEST DISTORTION - 7-TYPE 7025
LOW-NOISE DUAL TRIODES - 4-AUXILIARY AC

SPECIFICATIONS

SPECIFIC ATIONS

CONTROLS: 12 (6 dual cancentric, 6 single) an front panel. 4 on rear (dual cancentric). INPUT AND TURNOVER SELECTOR: 7-position, dual cancentric, independently set for each channel. Pasilions: Aux, Tope Amp. Tuner, AES, RIAA, Tape Head-800, LP. ROLL-OFF SELECTOR: 7-position, dual cancentric, independently set for each channel. Pasilions: APR. RIAA, AES, 10.5, 5, flot, Tope Head. 8ASS CONTROL: Dual cancentric, 13 db board or cut at 10,000 cps. RUMBLE FILTER: On-off switch, 12 db per active slape, down 15 db of 30 cps. SCRATCH FILTER: On-off switch, 12 db per active slape, down 15 db of 30 cps. SCRATCH FILTER: On-off switch, 12 db per active slape, down 15 db of 30 cps. SCRATCH FILTER: On-off switch, 12 db per active slape, down 15 db of 15,000 cps. STEREO FUNCTION SELECTOR: Dual cancentric. Each concentric witch selects different functions for both channels. Positions: Managural A, Managural B, Stereo, A + B, Collibrate. Calibrate Reverse Phase. Normal, Reverse Channels, Reverse Channels - Reverse Phase. VOLUME-BALANCE CONTROL: Dual cancentric. Clutch type: pulling aut center knob locks cantrals apart for independent adjustment when performing the "null" stereo balance and calibrating apperations pressing knob bock in permits simultaneous aperation as Master Volume Control for both channels, with Fletcher-Munson loudness contour compensation when Loudness switch is an. BRIDGE CONTROL: Continuously variable, with power an-off switch. Controls variable 3d-channel (Bridge) output and cross-channel signal feed. LOUDNESS SWITCH: On-off. Provides Toudness cantaur compensation for Valume Control. PRESENCE SWITCH: On-off. Provides Toudness cantaur compensation for Valume Control. PRESENCE SWITCH: On-off. Provides Toudness cantaur compensation for Valume Control. PRESENCE SWITCH: On-off. Provides Toudness cantaur compensation for Valume Control. Provides Toudness cantaur compensation when Loudness switch is an activate to the provide provided to the provided provided provided provided provided provided p

KT-600 WX. Same as above, completely factory wired and tested.

LAFAYETTE STEREO CENTRAL REMOTE CONTROL MODEL KT-315

ELECTRONIC STEREO ADAPTER KIT

This self-powered electronic adapter offers exciting features unique even in the fast moving stereo field. Inclusion of low-impedance "plate follower" outputs permits remote operation 50 feet or more from the controlled amplifier. Unusual bridge circuit assures precise balancing of the stereo system by means of audible "null" Objectionable "hole-in-the-middle" effect can be eliminated by pross-feeding variable amounts of audio from each channel. Includes controlled third-channel output for driving third amplifier and speaker, if desired. Individual or simultaneous control of each channel. Phase reversal with or without channel reversal. Selective monaural operation. Frequency response 10 channel reversal. Selective monaural operation, Frequency response 10 to 25,000 cps ± 0.5 db; gain 6 db; cross channel rejection better than 50 db.

50 db. Premium type 7025 dual triodes. Printed circuit boards for easy error-ter complete profusely illustrated manual included. Adapter





NEW! LAFAYETTE STEREO/MONAURAL BASIC POWER AMPLIFIER KIT

**BETT : LATAIDITE DIERDY MUNAURAL DANIC L'UNER AMPLIFIER RIT

***OA-WATT STEREO AMPLIFIER-18-WATTS EACH CHANNEL ** FOR CPTIONAL USE AS 36-WATT MONAURAL AMPLIFIER ** EMPLOYS 4 NEW PREMIUM-TYPE 7189 OBTPUT TUBES ** 2 PRINTED CIRCUIT BOARDS FOR NEAT, SIMPLIFIED WIRING ** RESPONSE BETTER THAN 35-30,000 CPS ** 1/2 DB AT 18 WATTS ** LESS THAN 1% HARMONIC OR INTERMODULATION DISTORTION A superbly-performing boild stereo amplifier, in equivic-build lift form to sore you lots of money and left you get Into stereo now of minimum expensel Dual inputs are provided each with individual volume control, and the unit may be used with a stereo preomalifier, for 2-18 wort stereo channels or, of the fick of a switch, as a fine 36-watt monoural bimplifier — or if desired, it may be used as 2 separate monoural 18-wort amplifiers (CONTROLS include 2 input volume controls, channel Reverse writch (AB-BA), Monoural 18-wort amplifiers (CONTROLS include 2 input volume controls, so channel germitting parallel (monoural) operation of 2 speaker systems of up to 16 ahms, INPUT SENSITIVITY is 0.45 volts per channel for full output. TUBES ore 2-6ANB, 4-7189; G7-34 rectifier, SIZE 9-3/16"d (10-9/16" with controls) a 5½ hz a 13½ "w. Supplied complete with perforated metal case, all necessary perts and detailed instructions. Shop. wt., 22 lbs.

KT-310 Stereo Power Amplifier Kit (with cage) KT-310 Stereo Power Amplifier Kit (with cage)

LAFAYETTE HEFT ATTS ARE AVAILABLE ON LAPAYE YE'S EASY PAYMENT PLAN - SEE PAGE

TELEDE 20 WATT HIGH FIDELITY AMPLIFIER KIT MODEL HF20K

- ±0.5 db 13 to 35,000 cps; ±1.5 db,
- 7 to 50,000 cps COMPARES WITH MOST EXPENSIVE
- AMPLIFIER MADEL
- BEST BUY IN SUPERLATIVE HIGH FIDELITY



\$5.00 Down -\$5.00 Monthly

COMPLETE 49.95

Migh quality equalizer and control section plus 20 wats Ultra-Linear Williamson-type power amplifier. Low distration feed-back equalization; \$ equalizations pravided for tortion feed-back tone controls. "Flat might provide the provides of control knobs. Loudness to tenter tortion feed-back tone controls. "Flat" positions at center tortion feed-back tone controls. "Flat" positions at center tortion feed-back tone controls. "Flat" positions at center tortion feed-back tone control knobs. Loudness dijustod to expend the provides adjustable level set control both an frant ponel. Provides adjustable level set control both an frant ponel. Provides adjustable level set control to control control control control for adjusted to give desired lissing inputs. 4 high level switched inputs.—Tuner, TV, Tope, Six inputs; 4 high level switched inputs.—Tuner, TV, Tope, Auxiliary (crystol/ceramic phana ar second tuner): 2 low Auxiliary (crystol/ceramic phana ar second tuner): 2 low Auxiliary (crystol/ceramic phana ar second tuner): 2 low all to the provides proper pick-up load-level inputs (not switched)—provides provides provides

MODEL HF20 - Factory Wired E-1 ENCLOSURE FOR HF20

EICO 30-WATT HI-FI INTEGRATED AMPLIFIER KIT with PREAMPLIFIER EQUALIZER AND CONTROL SECTION



• EXTREMELY VERSATILE EQUALIZATION AND CONTROL • NEWLY DESIGNED "LOW-SILHOUETTE" CONSTRUCTION

Only \$5.80 Down - \$6.00 Monthly

Only \$5.80 Down - \$6.00 Monthly
Combines the high stability margin, wide frequency range, negligible distortion and exceptional power supply reliability of the power amplifier section with an extremely versative from the power amplifier section with an extremely versative from the power amplifier section with an extremely versative from the power amplifier section with an extremely versative from the power amplifier section with an extremely versative from the power and following scratch and rumble filters microphone inputs and including scratch and rumble filters in addition to the usual facilities. Has 3 low level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for the equalization of the switch selects only input and/ar feedback type. Single switch selects only input and feedback type. Single switch selects on the feedback type. Single 40 watts 6

HF-32K Camplete Kit
HF-32 Some as above Factory Wired cover. Shpg. wt., 17 lbs. MF-30 Same, factory wired E-4 Matching cover



NEW! EICO BASIC AMPLIFIER

35-watt "Ultra-Linear" pawer amplifier (70 walts peak) featuring E134 tapped-screen autput stage, low-noise EF86 featuring E134 tapped-screen autput stage, low-noise EF86 featuring E134 tapped-screen autput stage, low-noise EF86 featuring E134 tectifier. Frequency response 5-100,000 cps ± 1,5 db @ 35 watts, quency response 5-100,000 cps ± 1,5 db @ 35 watts. MD Istartion 6 & 7000 cps 1,15 db and narmanic distantion below 1%. 20.20,000 cps ± 1 db both at 35 tartion below 1%. 20.20,000 cps ± 1 db both at 35 tartion below 1%. 20.20,000 cps 1 lb kc. Speaker taps 4, above 10 (20.20,000 cps), 15 @ 1 kc. Speaker taps 4, above 10 (20.20,000 cps), 15 @ 1 kc. Speaker taps 4, 60 cps. Size: 7" high x 14" wide x 8" deep. Shpp. wt., 25 lbs.

25 lbs.

HF35K 35-w. Power Amp. Kit

HF35 Same, factory wired & tested

E-2 Matching Enclosure

Five-tube "Ultro-Linear" hi-fi amplifier rated 22 watts for involved the continuous. 44 watts peak. Low-naise EF86 direct-coupled continuous. 44 watts peak. Low-naise EF86 direct-coupled to 55N7C7B drives push-pull 616GB tapped-screen autput to 55N7C7B drives push-pull 616GB tapped-screen autput to 55N7C7B drives push-pull 616GB. 7000 cps 10,000 cps

Net 38.95 Net 61.93 Net 4.53

Williamson-type 14 wott (28 watts peak) power amplifier of low cost for both stereo and monaural installations of low cost for both stereo and monaural installations of low cost for both stereo and monaural installations. The stereo cost of the stereo cost of

LAFAYETTE SENSATIONAL VALUES in Stereo Turntables and Changers

LAFAYETTE PROFESSIONAL TURNTABLE WITH AUTHENTIC HYSTERESIS SYNCHRONOUS MOTOR PERFECT FOR NEW STEREO & MONAURAL RECORDS

PROFESSIONAL 4-SPEED TURNTABLE WITH HYSTERESIS-SYNCHRONOUS MOTOR

THE LAFATETTE TRUE HYSTERESIS-SYNCHRONOUS MOTOR. Since mony to-colled "hysteresis" motors have oppedred and will continue to appear on the market, it is important that you know the difference between the real thing, as provided by Lafatette, and the imitators with partial hysteresis motors.

THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR IS PERFECT FOR THE NEW STEREO AND MONAURAL RECORDS. THE FACT THAT THE NEW STEREO RECORDS CONTAIN VERTICAL MODULATION IMPOSES STRINGENT REQUIREMENTS ON TURNITABLES. THEY HAVE TO BE FREE FROM RUMBLE, FLUTTER, WOW AND SPEED VARIATION. THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR MEETS ALL THESE REQUIREMENTS WITH EFFORTLESS EASE, RESULTING IN SUPERIOR REPRODUCTION OF STEREO DISCS, AS WELL AS TREMENDOUS REDUCTION IN RECORD WEAR.

REDUCTION IN RECORD WEAR.

ONLY LAFAYETTE'S HYSTERESIS-SYNCHRONOUS MOTOR, In its price class, is made to extremely fine toler onces (an the order of .00001 inches)! Only Lafayette's motor has 16 cares, a high permeability rator magnet, but thrust bearings, cilities sleeve bearings plus felt all reservair, coaling fins as an integral part of the rotor and shollow rotor care for maximum efficiency and minimum heat. Only Lafayette's motor can be alled from above without disassembly, through a unique all feed system. Only Lafayette's motor has a self-alligning armature. ONLY LAFAYETTE CAN GIVE YOU A REALLY PROFESSIONAL TURNTABLE WITH TRUE HYSTERESIS— SYNCHRONOUS MOTOR AT SUCH AMAZINGLY LOW PRICESI

LAFAYETTE MODEL PK-245 .

LAFAYETTE MONEY-SAVER COMBINATIONS SAVE UP TO 20%

Save an these combinations of Lafayette turntables, arms and nationally famous compatible sterea diamond cortridges

COMB.	TURNTABLE	TONE ARM	CARTRIDGE	SPECIAL	COMB.	TURNTABLE	TONE	CARTRIDGE	SPECIAL
PK-301	PK-245	PK-270	Picker, 371-D	92.50	PK-305	PK-245	PK-280	Shure M7D	94.50
PK-302		PK-270	Shure M7D	92.50	PK-306	PK-245	PK-280	GE GC-5	94.50
PK-303	PK-245		GE GC-S	92.50	PK-307		PK-905	Pick. 371D Shure M7D	88.50
PK-304	PK-245	PK-280		94.50	PK-309		PK-905	GE GC 5	88.50

Net 104.50

VALUE 129.50 ONLY 64.50 SAVE OVER 50%



SAVE

PK.245 Turntable with PK-270 professional 12" Sterea tone arm with Shure M3D compatible sterea cartridge with diamond stylus. PK-311 112.56

LAFAYETTE 4-SPEED PROFESSIONAL TRANSCRIPTION PLAYER WITH 3 LB. 12" ALUMINUM TURNTABLE

● IDEALLY SUITED FOR STEREO! ● BETTER THAN-50 DB RUMBLE & HOISE ● VIBRATIONLESS MOTOR SUSPENSION - BELOW 0.2% WOW & FLUTTER - MAGNETIC EDDY-CURRENT BRAKE

3 LB. 12" BALANCED & MACHINED ALUMINUM TURNTABLE . SPEED CONTROL FOR ± 7% VARIA-TION OF EACH SPEED

An amazing low price for the superior quality embadled in this fine instrument. Features include heavy, rim-weighted, 3 lb, machined-aluminum 12" turntable, magnetic broke with speed control for ± 7% variation of seat speed; the extremely leve noise and ramble figure of 50 db below everage recorded level; waw and flutter (speed variations) of less than 0.2%; new-type aversize precision-ground later with special lubrication features; positive-locking detents on 4-speed single-knots speed selector; ("off" positions between all speed positions; free-floating shock-mounted motor; automatic later disengagement in "off" positions; precision spindle turns an single boll bearing; heavy duty 4-pele induction motor. Heavy rubber turntable mot. For 105-120 valts, 60 spc AC, draws 0.13 amperes. Size of motor plate 11" x 10" x 14½"; requires 4"below motor board. 1½" above. Camplete with straboscope disc, 45 rpm adapter, AC line cord. Shop, wt., 14 lbs.

PK-240 12" TRANSCRIPTION TURNTABLE

PK-240 & PK-270 ARM	1 1/4
SAVE	
88.5	0
Less Base	Only 8-85 7.00 Down Monthly
PK-240 turntable wi	th PK-270 professional 12" stereo tane

PK-240

ONLY

37.50

rm with Shure M3D compatible stereo cartridge with diamond stylus. PK-322 Net 88.50

COMB. NO. TURNTABLE ARM CARTRIDGE NET NET ARM CARTRIDGE NO. TURNTABLE PK-270 PK-270 PK-280 PK-280 PK-280 PK-240 PK-240 PK-240 PK-240 PK-240 65.50 PK-316 PK-317 PK-318 PK-312 PK-240 PK-POS Pick. 371-D PK-313 PK-240 PK-905 Shure-M7D 65.50 PK-90S PK-270 GE GC-5 45.50 Pick. 371 D

New Lafayette law-rumble Model PK-240 turntable with Pickering "Stanton" Model 196.7D stereo/manaural ription arm with Stereo-Fluxvalve magnetic cartridge and 0.7 mit diamond stylus.

17.50 PK-280 14" STERED TONE ARM 19.50 PLUG-IN HEADS FOR POPULAR STEREO CARTRIDGES 7 (Z REVOLUTIONARY NEW VERTICAL LATERAL KNIFE-EDGE BEARINGS FOR COMPLETE FREEDOM OF STEREO MOTION

THE REVOLUTIONARY NEW LAFAYETTE VERTICAL-LATERAL KNIFE-EDGE 12" & 16" STEREO TONE ARMS! 4 HARDENED-STEEL KNIFE-EDGE PIVOTS & BEARINGS FOR COMPLETE, PRACTICALLY FRICTIONLESS, FREEDOM OF MOTION

● LIGHTWEIGHT, DIE-CAST ALUMINUM TONE ARM

• SELF-CONTAINED BUBBLE LEVEL FOR PERFECT, GUESS-FREE LEVELLING ● LIGHT, MOLDED PLASTIC PLUG-IN SHELLS FOR MOST POPULAR STEREO CARTRIDGES

PRECISELY-ADJUSTABLE COUNTERBALANCE WEIGHT

NON-RESONANT WITHIN THE AUDIBLE FREQUENCY RANGE

● PERFECT TLACKING WITH THE LIGHTEST STYLUS FORCE ● EXTREMELY EFFECTIVE FOR PERFECT REPRODUCTION WITH "45-45" STEREO DISCS

EXTREMELY EFFECTIVE FOR PERFECT REPRODUCTION WITH "45-45" STEREO DISCS

RUGGED CONSTRUCTION — FOOLPROOF — TROUBLE FREE

A remarkable advance in tane aim design is presented in these new Lafayette tone arms. An unusual new principle, utilizing 2 vertical and 2 lateral hardened-steel knife-edge pivals supported by hardened steel bearings, provides extremely law harizantal and vertical friction. This unusual type of bearing provides minimum waveform distartion and na undestrable mation or loase-jointed action as viewed from the stylus end. Graave tracing is smooth, with excellent tracking even with very light pickup weight, due to the absence of frictional losses. Friction in horizanal and vertical directions is low, but mechanical impedance is high at 45", praviding maximum effectiveness with 45-45 stereo cartridges. The unique knife edge bearing construction makes it possible to draw out the 2 shielded leads from the center of the support column; eliminating "stiffenss friction" due to the leads. A highly-precise bubble level is pravided at the top of the upport column; the bubble plus 3 adjustments on the base make for perfect levelling. Height of the arm is adjustable from 1½" to 2½" above matorboard. Overall length of PK-270 12" arm is 12½"; linear distance from support column to stylus tip is 10", the PK-280 16" arm is 14½" averall; effective length is 11½".

Net 17.50 PK-270 Lafayette 12" Tane Arm. Shpg. wt., 1½ ibs. PK-280 Lafayette 16" Tane Arm. Shpg. wt., 2 lbs.

LAFAYETTE COMPLETE STEREO TRANSCRIPTION PLAYER

● 5-CONTACT PLUG IN HEAD FOR ALL STEREO CARTRIDGES

● 4-SPEED, HEAVY DUTY 4-POLE TRANSCRIPTION TYPE INDUCTION MOTOR ● MAGNETIC BRAKE FOR

±7% SPEED ADJUSTMENT ● STYLUS WEIGHT ADJUSTMENT SCREW ON TONE ARM ● RUMBLE AND

NOISE -40 DB ● LESS THAN 0.3% WOW 5-CONTACT PLUG IN HEAD FOR ALL STEREO CARTRIDGES

Here is a camplete hi-fi, campotible sterea pickup system, designed against absolescence and yet priced. This top quality manual player features a 5-contact plug in head to accommodate the latest sterea as well

aural cartridges.

Equally important in contributing to the excellent performance of this system is the new 4-speed turntable assembly. If is equipped with a quiet, heavy duty 4-pale motor, with an exclusive magnetic brake for instantaneous fine adjustment of each speed. Stroboscope disc also included. Smooth aperation is assured further by the 10" heavy turntable, fitted with rubber mat. Provision for easy adjustment of stylus pressure is available. Dimensions of maunting plate 12-15/16" left to right, and 10%" front to rear. Requires 2%" below and 3" above motor board. For 105-120V, 60 cps. Accessories included are: 45 rpm adaptor, autput cable to amplifier and plug in heads. Shpg. 14 lb.

wt., 14 lbs. PK-1605—Complete sterea transcription player, less cortridge SPECIAL MONEY SAVING COMBINATIONS

vt., 5 lbs PK-162-Wood base for above, custom finished in either mahagany or blande (Please Specify). Shag. PK-163—Unfinished mounting board for above. Strong durable %" gumwood. (Shpq. wt., 1 lb.)

PK-323 Same as above with PICKERING 371D
PK-324 Same as above with SHURE M7D
PK-325 Same as above with GE GC-5



DELUXE WOODBASES AND MOUNTING BOARDS FOR TRANSCRIPTION TURNTABLES



FINEST SELECTED HARDWOOD VENEERS
CHOICE OF FIVE CABINETMAKER FINISHES
FREE-FLOATING FOAM RUBBER MOUNTED
MOTOR BOARD
INDIVIDUAL ADJUSTABLE FEET FOR ACCURATE
LEVELING

14.95

Net 14.95

PK-266 Base and board cut for PK-240

PK-267 Base and board uncut for mounting ather makes of turntables Net 14.95

MOUNTING BOARDS FOR LAFAYETTE TURNTABLES

NEW! Lafayette VISCOUS-DAMPED STEREO TONE ARM — PROFESSIONAL 12" PK-90S



JEWEL BEARING SUPPORT
INSTANT PLUG-IN CARTRIDGE CHANGE
AUTOMATIC FLUID CONTROL
PERFECT RECORD TRACKING
ACCOMMODATES MOST STEREO & MONAURAL
HIGH FIDELITY CARTRIDGES

This Stereo/Monaural transcription arm assures dependable stable operation, utilizing the floating-action principle of viscous-damping. The orm is supported of a single ciple of viscous-damping. The orm is supported of a single ciple of viscous-damping. The orm is supported of a single ciple of viscous-damping. The orm is supported of a single point by a pivot and lewel bearing having negligible friction. Domping is accamplished by a silicane fluid occupying the gop between a ball and sacket. This damping ing the gop between a ball and sacket. This damping ing the gop between a ball and scaled. This damping ing the gop between a ball and scaled in the research of stylis should error and prevents damage to either research or stylis should error and prevents damage to either research or stylism in the card maccepts all records up to 12° and mixed. The tane arm accepts all records up to 12° and mixed. The tane arm accepts all records up to 12° and mixed. The tane arm accepts all records up to 12° and mixed. The properties of previous properties and provide proper stylis pressure, simplify installation and provide proper stylis pressure. In 12°, the sight adjustable from 3½° to 2½° above length is 12°; height adjustable from 3½° in diameter. Shop, wt., 2½° lbs.

motorboard; round industries Stereo TONE ARM Shpg. wt., 2½ 1bs. PK-905-12" VISCOUS-DAMPED STEREO TONE ARM Net 12.50 NEW! JOBOPHONE 1301 MS SEMI-PROFESSIONAL TRANSCRIPTION TURNTABLE

with Constant Speed Synchronous Motor VERTICAL

DESIGNED RUMBLE STEREO

IMPORTED FROM HOLLAND YOU MONEY!



SPECIALLY PRICED! 24.95 QUANTITY

· COMPLETE WITH

RONETTE STEREO/MONAURAL TURNOVER CARTRIDGE

PATENTED "SONOMAT" HIGH TOROUE DRIVE ASSEMBLY FOOLPROOF COLOR-CODED PUSHBUTTON SPEED SELECTION 1/2 OF 1% SPEED ACCURACY LESS THAN 0.29% WOW & FLUTTER

ACCURACY LESS THAN 0.29% WOW & FLUTTER

A precision-engineered 4-speed turntable with many notoble features. Only moderately-priced turntable with
"gyra-action" turntable suspended an single ball bear"gyra-action" turntable suspended an single ball bearing with deep-well brass sleeve. Record, turntable and
spindle rotate as a single unit to prevent wear of record
spindle rotate as a single unit to prevent wear of record
spindle rotate as a single unit to prevent wear af record
spindle rotate as a single unit to prevent wear af record
spindle rotate as a single unit to prevent wear af record
spindle rotate as a single unit to prevent wear af record
spindle rotate and spindle spring counterbalance an
flutter. EXCUSIVE adjustable spring counterbalance an
flutter. EXCUSIVE adjustable spring counterbalance an
street into lead-in groove of record. Thick liver-ubber
stylus into lead-in groove of record.
Thick liver-ubber
stylus into lead-in groove of record.
Thick liver-ubber
stylus into lead-in groove
stylus into lead-in groove
stylus into lead-in groove
stylus into lead-in groove
stylus into groove
stylus in

afayette OFFERS OUTSTANDING VALUES FOR THE AUDIOPHILE

NEW! LAFAYETTE 12" SINGLE SPEED 331/3 — RPM HYSTERESIS TURNTABLE



- IDEALLY SUITED FOR STEREO
- TRUE HYSTERESIS-SYNCHRONOUS MOTOR
- RUMBLE & FLUTTER LESS THAN 0.2%
- 41/2 LB. RIM WEIGHTED ALUMINUM TURNTABLE
- STURDY MOUNTING PLATE OFFERS MAXIMUM SHIELDING

Beautifully styled and modestly priced! This 331/3 rpm turntable offers superior performance for hi-fi and professional use. Accurate and close tolerance machining throughout insures trouble-free operation, with extremely low levels of wow, flutter and rumble. Employs superior craftsmanship throughout—all critical parts are ground to micro finish. True hysteresis synchronous motor provides absolutely constant speed regardless of line voltage variations. Motor is shockmounted with rubber cushion. Has precision ground shaft which turns on heavy ball-thrust bearing, thereby eliminating any vertical movement—a prerequisite for stereo. The 41/2 lb. die-cast rim-weighted aluminum turntable is lab-tested for perfect dynamic balance. The oversize heavy duty roller wheel provides positive rim drive. The roller is disengaged in "Off" position to prevent flat spots. Sturdy mounting plate offers maximum shielding against hum pick-up. A rubber turntable mat is provided so that moximum tracking is assured. Less than 0.2% wow and flutter. Noise level is 45 db below average recording level. The turntable is attractively styled to blend with any home decor. Has "On-Off" switch and indicator light. Requires 26 watts on 105-120V., 60 cycles AC. Size: 13¾ x 14¼ x 6¼". Shpg. wt., 19 lbs. Net 47.50

LAFAYETTE PROFESSIONAL BULK TAPE ERASER AND DEMAGNETIZER

- COMPLETELY ERASES TAPE REDUCES NOISE LEVEL
- FOR 3", 5", 7", OR 101/2" REELS TWO ERASING COILS
- 61/2 AMPERES DRAIN

Regularly 49.95 Special 21.50


A carefully designed and precisely manufactured professional tape "degauster" for complete erasing of tapes. Just place the tape reel on spindle of demagnetizer, slow-ly ratate 2 or 3 turns, take off, and that's all-a carding the state of the permanently dispersion of the entire tape—even extro strong sounds too loud to be removed by the recorder's own erase head. Completely clears tape of any prior recordings. In addition, by clearly the profession of the level of new "virgin" tape. In fact, tape hiss to the level of new "virgin" tape. In fact, tape hiss to the level of new "virgin" tape. In fact, tape hiss to the level of new "virgin" tape. In fact, tape hiss to the level of new "virgin" tape the case, or under the control of the

prefer to permanently disconnect the recorder's erose head, and use only bulk erosure. Two completely separate coils are used for doubly-effective erosure, even of large. 10½" reels. An extra powerful unit for heavy-duty usedraws over 6½ amperes. The Ladgette Tape Demagnetizer offers all of these features, and at this special price. Can be used to demagnetize tape, magnetically striped film, plus tools and walches. This professional unit has a heavy custom finished case, a rugged non-magnetic tap, heavy duty an-aff switch and power card. Mas built in fuse, Plud light prevents accidentally leaving it turned an. Size 6½" x 7½" x 3½". Shap, wt., 14 lbs.

Net 21.50

LAFAYETTE TAPE HEAD DEMAGNETIZER

• REMOVABLE POLEPIECES • EXTRA CONVENIENT



Unlike other demagnetizers, the Lafayette Tope Head Demagnetizer uses remavable polepieces. Three complete sets are furnished: straight, 45°, and 90° (right angle), permitting quick and easy use with any tape head. Tope heads need no langer be remaved from the recorder to they can be reached by the clumsy polepieces of older head demagnetizers; the Lafayette Demagnetizer's polepieces reach every head.

For from being a fusury, a tope head demagnetizer is necessary for best tope recorder performance. Among all the passible sources of noise in tope recorders, there is only one which is common to all recorders and is a perfectly natural, common occurrence—tape hiss due to magnetized heads. Although unmagnetized when new, tope heads gradually become magnetized by sharp switching pulses occurring while switching the recorder from play

to record or vice verso. Same audia sources (especially the human voice) produce unbalanced signals containing more power peaks in one direction than in the other. This unevenness is also sufficient to cause magnetize tian of

This unevenness is also sufficient to cause magnetize tion or tape head.

The solution is to use a demagnetizer to remove this permonent magnetizm from the head, thus reducing the noise level. Periodic head demagnetization is required for all tape recorders to insure aptimum signal-to-noise ratio. For this reason, same prafessional tape-recorders are demagnetized as aften as several times weekly. Now, Lafaryette enables anyone with even the most modest budget to perform this necessary demagnetization, with a minimum of effort, Far 110 volts 60 cycles. Shap., wt., 1 tb.

PK-238-Tope Head Demagnetizer

HIGH FIDELITY RECORDING TAPES



ALL LAFAYETTE TAPES SOLD ON MONEY-BACK GUARANTEE • GUARANTEED FIRST QUALITY SPLICE-FREE



1800 FT.-7" REEL-ACETATE BASE

- You Be The Judge! -NEW! MYLAR BASE RECORDING TAPE

Latayette's huge purchasing power makes it possible to provide you with first-quality tape at about half the price you would pay for the same tape with the manufacturer's awn labels. WE GUARANTEE ABSOLUTE SATISFACTION OR YOUR MONEY BACK.
These splice-free mylar base recarding tapes are quality manufactured to assure uniformity of frequency response and complete obsence of drap-outs. In addition, they are extremely durable and break-resistant and are capable of withstanding temperature and humidity changes. The wide frequency response characteristics combined with low and humidity changes. The wide frequency response characteristics combined with low noise level and long playing time agens new horizons of recording possibilities for the high fidelity enthusiasts as well as professional sound engineers. Av. Shaps. wt., 12 oz.

RT-12 1800 ft. on 1 mit Mylar base. 7" reel diameter 2.75 Singly, Ea. 2.85 RT-13 2400 ft. on ½ mil Mylor base. 7" reel diameter Lots of 5, Eo. 3.49 Singly, Eo.

ACETATE BASE RECORDING TAPE

These papular high quality topes are coated uniformly with red axide an plastic base with high output and uniform frequency response covering the entire audio spectrum, 40.15,000 cps, completely splice-free. Another Lafayette autstanding value far all hi-fi recardists, backed up by aur Maney Bock Guarantee. Using 7½ cps dual track, 1200 ft. reel provides 1 hr. of recording time while 1800 ft. reel provides 1½ hr. of recording time with the standard time.

recording time.

RT-10 1200 ft. on 1 ½ mil acetate base, 7" reel.

Lats of 5, Ea.

1.49 Singly, Ea. RT-11 1800 ft. on 1 mil acetate base, 7" reel. Lots at 5, Ea.

1.98

NEW! LAFAYETTE PK-244 NEEDLE BALANCING GAGE

ACCURACY PERFECT FOR LIGHTWEIGHT ARMS

REEL LOCKS



Set of Two

Holds tape recorder reel in place by locking spindle to reel. Especially useful if recorder is in vertical position. Will not interfere with normal aperation of reels. Easily removable. MS-564 Set of two

> TAPE SPLICER WITH WAIST-TYPE SPLICE



Over 70% Off!

Here's a terrific valuel The lamous RCA Autosplicer cuts a diagonal flap joint in the tape and trims the splicing tope and tage edges with an indented trim cut. The slight "waists" formed prevent adhesive from cantacting recorder mechanism and prevent layer-to-layer adhesion. No more "wow", "flutter", or erratic performance due to adhesive deposited an tape guides, etc. Consists of a tape adignment guide with self-adhesive back for fastening to any surface, cutting unit with diagonal cutter an one slid and waist-type cutters an other, and protective cover for blades. Shaps. wt., 6 az. blades. Shpg. wt., 6 az. SP-144 Net .98

TELEPHONE **PICKUP** FOR RECORDING TELEPHONE CONVERSATIONS

Induction telephone pickup. Telephone conversations can now be
picked up with no tapping of
wires ar special telephone circuits. Simply place the phone
base, either cradle ar upright
type, an the pickup platform and
cannect the leads to the high impedance input of any medium
gain audio amplifler, or directly
to any tape, disc or wire recarder. Shep, wt. 8 ass. Shop, wt. 8 axs. Net 1 .95



METAL STORAGE CANS NEW

LOW PRICE .39 eo in lots of 6

Can holds 7" reel. Best protection for valuable recordings.
Handsame finish of hammertane enamel. Cans ribbed for stacking. Precision fit makes apening and closing easy.
Shpp. 41, 8 02.

ML-61 Lots of 6, ea., 39 — Singly, ea., 41

...Lots of 6, ea. .39 — Singly, ea. .41





(A) METAL TAPE STORAGE CHEST

STANDARD CASE: Sturdy all steel corrying case. Holds 12:7" or 5" reels and cons. Twin snop lacks for positive closure; perfect periodility. Guards against exposure and accidental erase. Platinum gray hammerloid finish. Metal separators between reels. Includes index cards. Shop. wt.,

(B)7 INCH EMPTY PLASTIC REELS

LAFAYETTE RECORD CHANGER SALE!

MONARCH 4-SPEED STEREO RECORD CHANGER

FULL INTERMIX IN ANY ORDER

PLAYS BOTH STEREO & MONAURAL RECORDS

SPECIAL

22.95 Complete with Steres
Turnover Cartridge

18.95 Complete with Monaural Crystal Turnover Cartridge

The newest British-made Manarch, specifically made for stereo.

Notable features is the low mechanical noise (rumble) and heavyduty 4-pole induction mater. Fully automatic design and simple construction ensures trauble-free aperation and long life.

PK-225 Manarch Stereo Changer, complete with campatible stereo
PK-225 Manarch Stereo Changer, complete with campatible stereo
Not 22.93

Crystal turnover cartridge Net 1.86

MONARCH 45 RPM Spindle Not 1.86

M



NATIONALLY ADVERTISED **CHANGER**

Tremendous Buy for Stereo!

STEREO AND MONAURAL CARTRIDGES

38.50 Regular Special 23.50 Only \$5.00 Down





NEW DYNAKIT MARK III 60 WATT POWER AMPLIFIER KIT

. PRE-WIRED PRINTED CIRCUIT ASSEMBLY


. MATCHED PAIR PREMIUM TUBES . CHOKE FILTERING TO MINIMIZE NOISE

Compact 60 watt basic amplifier designed for tinest listening quality in madern hi-fi installations. Prewired printed circuit assembly with parts mounted assures correct trauble-free construction in as little as three hours. Accurate and simple bias setting independent of meter accuracy. Balancing or critical adjustments are not required to meet performance specifications. Frequency response better than ± .5 db from below 6 cps to above 60 kc. Response at any level up to 60 watts is ± .1 db over a range in excess of 20 cps to 20 kc. IM distortion less than 1% of 60 watts, .5% below 50 watts and .04% at average listening levels. Less than 1% harmonic distortion within 1 db of 60 watts from 20 cps to 20 kc. Excellent transient response on pulses, square waves, etc., and noise 90 db below maximum. 4, 8, and 16 ohm outputs. Utilizes 1 6ANB, 2 KT88 (or 6550), 1 GZ34 and selenium rectifier. Washable, chip-proof vinyl coated finish on cover. All parts, tubes and protective cover included in kif. Shpg. wt., 28 bs.

MARK III 60 Watt Amplifier Kit.

Net 79.95

MARK III 60 World Amplifier, Completely Wired and Tested Nat 99.95 KIT WITH 70.7 VOLT OUTPUT FOR P.A. USE



NEW! DYNAKIT HI-FI PREAMPLIFIER KIT

PRINTED-CIRCUIT MODULE

• S INPUTS — 2 OUTPUTS • 4 A.C. CONVENIENCE OUTLETS

INTEGRAL D.C. HEATER SUPPLY

A quality preamp-control unit incorporating factory-wired printed-circuit module for easy and accurate assembly. Current and voltage feedback loops include four stages of gain. Inputs: Low-level magnetic certridge, high-level magnetic, radio, TV, tape, plus "special" low level (option of extra RIAA phono input, tape head, or mike). Dutputs: Tope and audio autput. Controls: Selector-equalization, bass, treble, volume, tape manitor, laudness, hum-belance. Tone-Cantrol Range: ±14 db @ 20,000 cps, ±20 db @ 20 cps. Phono Equalization: RIAA, 78 rpm, ariginal LP (accuracy ensured by use of 1% components). IM Distartion: Less than .05%, unchanged at any setting of volume control. Response: ±0.5 db 6-60,000 cps. Gain: 54 db @ 1000 cps. {RIAA input}, 20 db @ 20-20,000 cps. (High-level input). Impedances: 1000 chm (output), 500,000 chms or higher (terminating). Tubes: 2-ECC/12AX7 plus setenium stock. Power Requirements: 200-400 valls d.c. @ 3-4 ma.; 6 valts a.c. @ .75 amps. Size: 2½" high x 12" wide x 6" deep. Shpg. wt., 7 lbs. Chalce of bane white or charcoal brown vinyl finish.

Dynakit Preamplifier Kit
Accessory Kit for Panel-Mounting
Dynakit Dual Preamp Power Supply, PS-1



Lafayette's new Super-Sensitive 4 Transister Telephone Pick-up Amplifier with class "8" push-pull output for efficient speaker aperation. Permits the whole family to enjay phone conversations. Invaluable on long distance calls, as well as for group listening on business calls and conferences. No need for an long distance calls, as well as for group listening on business calls and conferences. No need for extension phones: Just place the pickup call under the telephone cradle base, or in case of metallic base, near phone receiver and you'll morved at how loudly and clearly the-two-way conversation comes threugh the speaker. Uses transistomer coupling for aptimum performance. The kit comes complete with threugh the speaker. Uses transistors, 3 transistor audio transformers, speaker, volume control, an attractive all parts including 4 transistors, 3 transistor audio transformers, speaker, volume control, an attractive all parts including 4 transistors, a precedit metallic chassis that makes mounting and wiring of parts a ripple-finish metallic cobinet, a precedit metallic chassis that makes mounting and wiring of parts a ripple-finish metallic cobinet, a precedit metallic chassis that makes mounting and wiring of parts a state of the parts of the pa

Telephone Pickup Coli BATTERY 9V. BURGESS #2N6 Nationally Advertised

4-SPEED CHANGER

COMPLETE WITH THE BRAND NEW VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE





VR-22 CARTRIDGE

ANOTHER FABULOUS BUY at Lafayettel This is a brand new current changer made by a famous manufacturer plus the new General Electric VR-22 sterea cartridge, affering the finest reproduction from both sterea and monaural records. This cartridge features 20-17,000 cps. response, and a .7 mil. dlamand needle. Up to NOT mention the changer manufacturer's name. This deluxe changer features outamotic intermix of different size records, a muting switch, click filter, and automatic shutoff ofter the last record is played. The heavy more considered for the very different rim-weighted turntable, the heavy duty 4-pele shaded pole mater and rugged drive system, all cambine to produce even, smooth torque with no speed voriations; there is practically no waw, no flutter, no rumble. And don't forget Lafayette's MONEY BACK GUARANTEE If you don't garge that you have received an exceptional value. Size 12½" x 13½", recuiring 5" clearance above and 2-1/16" below the low mater board. Shap, wt., 21 lbs. board, Shpg., wt., 21 lbs.
PK-330 RECORD CHANGER (less wood bose) with New GE VR-22 (.7 mil) Diamond Stereo Cartridge

PK-252 RECORD CHANGER with Pickering Stereo 371.7D diamond cartridge

WITH "STEREOTWIN" STEREO CARTRIDGE

CATALOG PRICE 86.15

COLLARO TSC-740
ELAC "STEREOTWIN" MAGNETIC STEREO
CARTRIDGE WITH 0.7 MIL DIAMOND STYLUS

Reg. Cot. Price 86.15

41.65

MERE IS A MOST UNUSUAL BUY! You get the latest model 4-speed Collars deluxe record changer, Model TSC-740, with outstanding styling, dynomically-balanced and damped 2-speec tone arm, outomatic intermixing of 7", 10" and 12" records stacked in order of decreasing size, automatic shut-off after lost record, automatic or manual operation and jam-proof quality mechanism. With the changer you also get the famous ELAC VARILABLE RELUCTANCE "STEREOTWIN" CARTRIDGE, with ABLE RELUCTANCE "STEREOTWIN" CARRIDGE, with superior low-hum performance, response of 30-18,500 cps ± 2 db, high output of 25 millivolts for excellent signol-to-noise ratio, high compliance of 4x10-*cm/dyne, and 0.7 mil diamond stylus. THIS IS A QUALITY COMBINATION—AT A PRICE THAT CAN'T BE BEAT! Shpg. wi., 20 lbs.

PK-279—Collaro TSC-740 with Elac Magnetic Sterea

PK-27,1 WOOD BASE-Similar to PK-111 but genuine walnut wood and finish. Shpg. wt., 6 lbs.... . Net 4.50

"MAGIC BRAIN" TV REMOTE CONTROL



NEW PURCHASE!

NEW PURCHASE!

For all KC590, KC597, and KC566 thru KC592
Series Chassis — Over 200 Different RCA Models!

Cantral your RCA TV set from any remaite spot in the room (up to 30 ft.) without getting up or touching the receiver! Also perfect for bed ridden or physically handicapped persons who cannot get around easily.

Here is what the remaite control can do: (1) TURN SET ON; (2) SELECT DESIRED CHANNEL; (3) ADJUST FINE TUNING; (6) TURN SET OFF. A simple compact unit that fits the polm of your hand, gives you all this control from your easy chair. The flat intercannecting cable is easily concealed under the carpet or along the floor baseboard, installation of all other components is made at the receiver. Components include Relay Chassis, Motar Bracket Assembly, Remate Control Mead and Cable, Switches, Mounting Straps, Terminal Board, Resistars, Capacitars and Nean Lamp. Detailed installation instructions included. Shpg. vt., 10 lbs.

wt., 10 lbs. TL-46—RCA No. 274 Remote Control

10 WATT PUSH PULL HI-FI AMPLIFIER KIT



BUILT-IN PREAMPLI-FIER FOR GE RELUC-TANCE CARTRIDGE

SELECTOR SWITCHES PERMIT CHOICE OF THREE INPUTS

SEPARATE BASS AND

4, 8 AND 16 OHM

EASY-TO-FOLLOW

This new, economy hi-fi omplifier has many deluxe features for exceptional performance. The three inputs are radie/crystal phane pickup, magnetic phane pickup and microphane. A selector switches the input from radio/crystal to microphane or magnetic pickup, depending upon the peelition of a rear agrons tides switch.

15.000- cps. DISTORTION. — 1.5% harmonic, 4% intermodulation of a worts. 4 CONTROLS — input Selector; Volume; Treble; Power-On-Off-boss. TREBLE CONTROL. — flot response up to 15 db boest. BASS CONTROL. — flot response up to 18 db obtenuation. OUTPUT IMPEDANCES — 4, 8 and 16 abms, TUBES — 55C7, 65L7GT, 2 — 6VGGT and SY3GT rectifier. AUXILIARY AC OUTLET — Distinctive Mammertone finish. SIZE — 10½" x 6½" x 3½". WEIGHT — 8½ lbs. For 110-120 Volts.

Camplete kit with coded wire, highest grede solder and detailed instruction manual. Nt. 91

KT-91

POWER/ISOLATION TRANSFORMER



IDEAL FOR AMPLIFIERS, INTERCOMS

AND RECEIVERS
12 PAGE BOOKLET DESCRIBING USES
AC LINE CORD AND PLUG IN

PRIMARY REDUCES SHOCK HAZARD IN

NEW! 6 TRANSISTOR SUPERHET RECEIVER with LATEST NPN-PNP TRANSISTORS

GE 2N188A AUDIO OUTPUT TRANSISTORS
 CLASS B PUSH-PULL AMPLIFICATION-PLENTY OF POWER.
 FOR GROUP AND PRIVATE LISTENING
 LABORATORY DESIGNED — SEMSITIVE, SELECTIVE, STABLES

Superb Performance! Incomparable Value!

Transistor-wise Ladayette proudly presents its newly revised 6 Transistor Superhet Receiver Kli KT-119A. Transistor-wise Ladayette proudly presents its newly revised 6 Transistor Superhet Receiver Kli KT-119A. This Improved model uses the latest GE NPN-PNP Transistors in an ingeniously engineered, laboratory tested circuit providing superb performance and on amozing superior commercial quality. The circuit features a specially matched set of 3 if transformer, Oscillator Coll, Nigh-Q Loop, Class 8 Push-Pulli Audio Amplification and optimum Transformer Caupling in audio and output stages. Hos efficient 2½% speaker for exemplary reproduction and earphone lack for private listening. Complete with all ports, transistors, pre-punched chossis, but less battery and leather case. New 28 page easy-to-follow step-by-step instruction book. Size 6 x 3½ c 1½. Shpg. wt., 3 lbs.

KT-119A — Camplete Kit-Less Case and Battery.... BATTERY PV BURGESS 2N6.

MS-339A — Stordy attractive brown leather case with carrying strap for KT-119A, 6 x 31/2 x 11/2 MS-366 - Sensitive matching easphone.

DIAMOND STYLI AT LOWEST PRICES ANYWHERE

LAFAYETTE DIAMOND and DIAMOND-SAPPHIRE STYLI

MADE FOR LAFAYETTE BY THE FOREMOST AMERICAN MANUFACTURERS

KEY TO POINT CODES HOW TO ORDER

explained in the table below.

LP = SINGLE 1 MIL MICROGROOVE FOR 331/3 AND

AG = SINGLE 2 MIL ALL GROOVE FOR ALL SPEEDS ST = SINGLE 3 MIL STANDARD FOR 78 RPM

COMB - DUAL -1 MIL DIAMOND AND 3 MIL SAPPHIRE

Identify your needle by cartridge number and illustration and order by stock no. Note that all all needles listed here are for monaural cartridges.

ALL DIAMOND STYLI ARE NOT ALIKE


The symbols in the column headed "PT SIZE" are Only Lafayette's Superior Diamond Styli are MADE FROM WHOLE DIAMONDS PRECISION
GROUND AND POLISHED VERTICALLY AND
EDGEWISE GRAIN ORIENTED

• SHADOWGRAPHED

Each Lafeyste's diamend stylus is made from individ-ual diamend, properly eri-ented and ground to close telerance; shadowgraph tested to give you lass wear per play and long Service life.

H CHILL

FULL I YEAR GUARANTEE ANY DIAMOND or DIAMOND-SAPPHIRE NEEDLE IN THIS LISTING



8	, 0	15	
STOCK SIZE NO. PT.		ICES STOCK SIZE DIAMOND NEEDLES REPLACES REPLACES IENSEN NO.	STOCK SIZE REPLACES NO. PT. FIG. CARTRIDGE REPLACES
1 1	FOR ADMIRAL CARTRIDGES	FOR MAGNAVOX CARTRIDGES	FOR RONETTE CARTRIDGES
PS-10 LP PS-16 COMB PS-17 LP			P5-35* LP
	FOR ASTATIC CARTRIDGES	FOR PHILCO CARTRIDGES	*The open and type (Fig. 54) replaces both Fig. 53 and 54
PS-20 LP	3 AC Series, 40T, 41T, 40-1, 41-1 A-7		FOR SHURE CARTRIDGES PS-16 COMB 6 WC10, WC10D, PC2 series, PC3 JP5-355D
PS-25 COMB	12 410 M-7	FOR PERPETUUM EBNER CARTRIDGES	
PS-17 LP	7 (CAC, CQ, CQ-1, LQD, LQD-1, QT, QT-33, 44-T, 46-1, 48-1, 164T Series	P5-64 (COMB 47 P12/RG RX5505D P5-65 (COMB 48 PE-8, PE10 RX5515D RX5515D P5-66 LP 22 P7000 (MI, MD) (LP only) RX552LPD	FOR SONOTONE CARTRIDGES
P5-35 LP .	(118, 120, 124 series, 310T, 312T, 420, 422, 424T5 series, 210-1, 310-TB, TS, 312-TB, TS, 414-1	FOR R.C.A. CARTRIDGES	P5-70 COMB 51 (IP-LB-1D, 2TD, 2TS, 2T-SD, 2T-LB-5D, 2T-LB-5D, 9980-SD, 9980D, ST, 5-665D (ST-LB-S, ST-LB-SD)
	FOR MAGNAVOX CARTRIDGES	PS-23 LP 121 74067 M-70LPD PS-10 LP 1 55652,76257,(988370-1),75044 JPS-30LPD	PS-32 COMB S1 3T, 3TS, 3TD 5-615D
1 1	1 4 560176, 560180	PS-20 LP 3 76257, (988370-2) A-75LPD	FOR WEBSTER ELECTRIC CARTRIDGES
PS-S1 COMB	37 \$60133, \$60151, \$60169-1, M- \$60170	SD PS-70 COMB S1 78748, 79807, 100653 S-668D PS-25 COMB 14 100329 A-715D	PS-17 LP 7 8X A-81LPD PS-10 LP 1 F11 JPS-30LP

REPLACEMENT STYLI FOR GE CARTRIDGES

STYLI FOR OLD TYPE GE CARTRIDGES (FIG. 32) FOR GE VR II CARTRIDGES (FIG. 35)

STYLI FOR OLD TYPE GE CARTRIDGES (F
Birect replacements for clip-in styli in GE VR II series medels 4G-050, 4G-052,
4G-040, 4G-041, 4G-043, 4G-041, contridges.

PS-45—Diamond 1 mil (LP) replaces GE RPJ-004

Net 3.49 Net 1.15 Net 1.15 A mil diamond LP clip-in stylus. Replaces GE 4G-010 46-1 mil sopphire LP clip-in stylus. Replaces GE 4G-015 48-3 mil sapphire 78 clip-in stylus. Replaces GE 4G-035 PS-541-Supphire 1 mil (LP) replaces GE RPJ-005 PS-540-Supphire 3 mil (78) replaces GE RPJ-001 MODERNIZATION ASSEMBLIES (FIG. 33)

Modernite your old triple-play cartridge. These assemblies replace both the old 78 points.

Once installed, you can replace one point at a time.

PS-78

DIAMOND SAPPHIRE Replaces and RPJ-013 and new RPJ-013A. FOR GE SERIES A CARTRIDGES (FIG. 34) Individual styli replacements that clip in to all GE "A" series.

Net 7.95 PS-47-Diamond 1 mil (IP) replaces GE RPJ-015

PS-543-Sapphire 1 mil (IP) replaces GE RPJ-015

Net 2.10 PS-542-Sapphire 3 mil (78) replaces GE RPJ-035 OUAL DIAMOND. Replaces aid GE RPJ-012 and new RPJ-012A. PS-79-list 49.95

DUAL SAPPHIRE. Replaces old GE RPJ-010 and new RPJ-019A. PS-5-45-list 5.95

DIAMOND STYLI FOR

With this handy, small mixer you can announce titles before playing records, mix two high impedance microphane inputs or perform any other mixing operation where 2 high impedance input channels are converted to a single mixed high impedance input channels. Each Input channel has its own easy acting level control for quiet mixing; all mounted in shielded, chrome plated housing. Has 2 RCA type female input jocks and one male RCA plug on output side. Overall size 2½" x 1½" x ½". Shpg. wt., ½ lb.



STEREO DIAMOND STYLI AT LAFAYETTE'S LOW PRICES!

FOR RONNETTE

(A). .7 mil diamond for Ronnette tu cartridges OV, OVI, TI and single BF40
P5-81

FOR ELECTRO VOICE

(B). .7 mil diomond for Electro Voice series 26 stereo turnover and series 21 single needle. PS-80 \$3.49

FOR SONOTONE

(C), Combination .7 mil (sterea) diamond and 3 mil (78 RPM) sapphire for Sonatone 8T. P5-82 S3.49 (C). Same os obove but with .7 mil (stereo) diamond and 1 mil (manaural LP) sapphire.

P5-83 FOR COLUMBIA (D) .8 mil diamand for Columbia SC-1

cortridge. PS-84

FOR MONARCH (BSR)
(F) .7 mlt diamond for TC85 Cortridge.
P5-86 \$3.49

RECORDER PATCH CORD



IDEAL FOR MAKING CONNECTIONS FROM RADIO, PHONO OR TV TO TAPE RECORDER.

Mandy 6 ft. lead hos insulated alligator clips at one end and RCA phono plug at the other. Supplied with shielded phono plug adapter to adapt the RCA phono plug to standard phono plug if necessary. Attach alligator clips to speaker terminals and simply plug other end into tope recorder, Ideal for recording from Rodio, Phano or TV.

MS-565

NEW! EXCLUSIVE LAFAYETTE STYLOCHRON



- · PROTECT YOUR PRECIOUS RECORDINGS.
- GUESS WORK -KEEPS AN ACCURATE RECORD OF HEEDLE USE.

More precious recordings are ruined by tardy replacement of the needle than by any other couse. Now, there is no of the needle than by any other couse. Now, there is no the needle this hoppen, especially to your doubly precious need to let this hoppen, especially to your doubly needle has been in use so that you can the long your needle has been in use so that you can replace the worn needle of the proper time, before it contained to domage to your records. The Stylachron is quickly and replace the worn needle of the proper time, before it under the ossily mounted on your motor boord or other convenient down you have the solid to truntable only your record changer or turntable stats, the Stylachron begins to register. It stops when olders, the stylachron begins to register. It stops when only time how long you have been using the needle. Did the turntable stops, the loop hour did will tell you only time how long you have been using the needle. Did the turntable of the your units. You can remove your stylus only time how long you have been using the needle. Did the turntable of the your units. You can remove your stylus only timed of the foce plate is 2½ "Extends 1½" below to behind panel. Complete with Instructions. Shop. Wet 4.95 px. 224.



With this pocket-sized inspection microscope you can examine your stylus tip for signs of wear, imperfections, general condition. Its 50X magnification is enough to provide a good, clear image for observation. The "objective" end has a curved metal guard which reflects light source for strong illumination; the slit in the goord also enables the centering of stylus in microscope field. Con be used with any stylus. Has adjustable objective lens. Size 3%" long x ½" diam. Shpg. wt., 8 oz.



LAFAYETTE SPECIAL VALUE STYLUS PRESSURE GAUGE

With the advent of stereo records, correct stylus pressure becomes of important in abbaining the best reproduction and least stylus and record wear. Lalbyette's stylus pressure gauge is an accurate device that allows you to read with the pickup in normal playing position. Range, 0.30 gm. No spring and minimum moving parts. Shpg. wt., 11b.

PK-223 Net 99c

LAFAYETTE HIGH FIDELITY STEREO- MONAURAL TEST RECORD

● TESTS RUMBLE EACH CHANNEL ● TESTS LEVEL EACH CHANNEL ● TESTS BALANCE • TESTS EQUALIZATION • STYLUS WEAR TEST • TESTS RESO-

MANCE . HELPS TUNE BASS REFLEX BAFFLES

MANCE HELPS TUNE BASS REFLEX BAFFLES

A Lofoyette exclusive to help you check both stereo and monoural systems, for stereo leasting this two-sided 12"

L.P. stereo record has on its stereo side two 1000 cycle honds to check the level of each channel separately; separate RIAA equalization check for each stereo channel in 8 steps from 30 to 10,000 cycles; bolance check to she level of each chonnel superiod metronome recording; rumble test for each stereo channel in experiod; provides and steps from 30 to 15,000 cycles, a continuous glide band from 30 to 15,000 cycles, to less for man or of cobinet and 30 cycle to 20 cycle step band to tune baffles. The periodic use of this record to check host stereo channel. There are styluwer test grooves on both outer and inner edges of each side to check both stereo and monoural styli. For man outal testing If provides an RIAA equalization test in 9

Net 2.95



PK-239 AUDIO MIXER

SWITCH

3 SPEAKER SELECTOR



Convenient Screw Connections Easily Panel Mounted

Convenient ratary switch permits selection of any speaker or combination of 2 or 3 speakers from a remate location. Attractively finished in gold metal with black and ivory ratary switch. Dimensions ore 3½ x 4½ x 4½ x 2½.



MINIATURE HI-FI AUDIO MIXER

PHONO PIN JACK SINGLE HOLE MOUNTING 15c ea.10 for \$1.35

JUMPER LEAD KIT





COLOR CODED 14" LEADS

10 handy 14" leads with miniature insulated alliga-tar clips attached to each end. Clips and leads color coded. 5 pairs each a different color. Ideal for serv-iceman or experimenter.

NEW! LAFAYETTE-GOODMANS 3-WAY EXTRA-VALUE HIGH FIDELITY SPEAKERS

● 13% LB. TO 61% LB. MAGNETS OF "ALCOMAX"—THE MOST EFFICIENT MAGNETIC MATERIAL AVAILABLE! ● FREE-EDGED CONE SUSPENSION MADE BY EXCLUSIVE GOODMANS PROCESS • 12" AND 15" MODELS, ALL 3-WAY WITH SMOOTH LOW-, MID- AND HIGH-FREQUENCY COVERAGE • ALL MODELS HAVE SPECIAL LOW-RESONANCE WOOFER CONES, STIFF MID-FREQUENCY RADIATOR COMES, COMPRESSION-DRIVER TWEETER HORNS • FREQUENCY RESPONSE 30-20,000 CPS • HIGH POWER-HANDLING CAPACITY ● HIGH EFFICIENCY WITH LOW-DISTORTION TRANSIENT RESPONSE ● WIDE DISPERSION-ANGLE TWEETER WITH SELF-ALIGNING

ALUMINUM VOICE COIL & DIAPHRAGM PLUG-IN 12 DB/OCTAVE CROSSOVER NETWORK WITH HIGH FREQUENCY LEVEL CONTROL

SUPPLIED WITH ALL MODELS

SUPPLIED WITH ALL MODELS

LAFAYETTE went to this leading English speaker manufacturer for these outstanding custom speakers to provide you with this SUPER-PERFORMANCE VALUE by direct importation. These speakers are all 3-way units, with waafer, mid-range radiator and tweeter all axially maunited to provide an efficient, low distortion, wide-range speaker system. Available in 12" and 15" models, all speakers employ extremely heavy Alcomax magnets—the most efficient magnetic malerial available—for converting electrical impulses to sound with minimum distortion, especially with musical pragram material. In the exclusive Goodmans pracess used in manufacturing the waafer cones of these speakers, the cone rails and cone edges are bambarded with minute particles of specially-blended plastic ma.

terials to form a virtually free-edged cone suspension without the usual joint faults found in so-called free-edged cones and eliminating standing waves and surround resonances. Frequency response of all models is 30-20,000 cps, vaice cails are all 16 ahms. Free-air waafer cane resonances are 25 cps for 15" models, 35 cps for 12" models. At 2000 cps the stiff-caned mid-frequency radiator provides smooth mechanical crossovers the compression driver tweeter has a rigid plastic harn with 2½" circular mouth, 1" diameter aluminum voice call and diaphragm in a self-aligning assembly with an air chamber and phase equalizer and utilizes the plug-in 12 db per actave electrical network for smooth crossover at 5000 cps. The network has a high-frequency level contral with attractive escutchean a high-frequency level control with attractive escutched and knob.

MADE BY THE FAMOUS GOODMANS
English M'f'r Of Some Of The

World's Best Hi-fi Speakers!
CUSTOM BUILT TO LAFAYETTE'S
OWN RIGID SPECIFICATIONS

Guaranteed SUPER PERFORMANCE-**AON BE LHE INDEE!** SATISFACTION OR YOUR MONEY BACK

ONLY 10% DOWN

EASY TIME PAYMENTS



LAFAYETTE-GOODMANS 1% LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

with L-Pad

● 12" SPEAKER WITH 30-WATT POWER RATING ● 15" 35 WATTS • WITH PLUG-IN 12 DB PER OCTAVE L/C CROSSOVER NETWORK & L-PAD LEVEL CONTROL

SK-110 3-WAY 12" SPEAKER

Another highly efficient integrated 12" 3-way speaker system with response of 30-20,000 cps, cone resonance 35 cps, and power rating of 30 watts program material, dimensions 7" averall depth, 124" diam. Magnetic flux density 11,500 gauss; total flux 129,000 maxwells. 1\%"

voice coil. Rugged metal frame. Otherwise the same su-perior performance specifications os all other Lafayette-Goodmans speakers on this page. Shpg. wt., 20 lbs. SK-110-12" 3-way speaker with 11/4 lb. magnet.

... Only 44.50 Ea. Net GET 2 FOR STEREO OHI 2 FOR STEREO ONLY #4.30 cs. K-110 but 15" specker, with power rating of 35 watts and cone resonance of 25 cps. 7" deep, 15%" overall diameter. Shpg. wt., 25 lbs. Net 54.50

Only \$1.50 Ea. Net

1% LB. MAGNETS 12 db/Octave 30-WATT 12" 47.50 L/C Crossover 35-WATT 15" 54.50

LAFAYETTE-GOODMANS 31/2 LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

● 40 WATTS POWER RATING OF 12" SPEAKER ● 15". 45 WAITS

→ HEAVY DIE-CAST NON-RESONANT FRAMES

12
DB PER OCTAVE CROSSOVER WITH L-PAD HIGH-FREQUENCY
LEVEL CONTROL

25-35 CPS WOOFER RESONANCE

SK-112 3-WAY 12" SPEAKER

SK-112 3-WAY 12" SPEAKER

This is a 3-way integrated 12" speaker system whose performance can only be compared, in other makes, to the very best available. The superior efficiency of the 3% lb. Alcamax magnet with total flux of 185,000 maxwells pitch excellent constructional details, the exclusive Goodmans cane bonding and treatment praces; the 35 cas codmans cane bonding and treatment praces; the 35 cas conditiver tweeter, the heavy, non-resonant discuss metal trame—all are combined to provide another LAFAYETTE SUPER-PERFORMANCE VALUE, made possible only by its


custom specifications and by direct importation to save you money. Specifications are similar to the other Lofoyette-Goodmans 12" speakers listed on this page, except power roting is 40 warts program material, vaice coil diam, is 1½" and averall depth is 8½". Shpg. wt., 25 lbs. 5K-112-12" 3-way speaker with 3% lb. magnet Net 69.50

Only 63.50 Ea. Net GET 2 FOR STEREO GET 2 FOR SIERCU Chip 63.7 May 15" with 3½ lb. magnet. Same at SK-11-2 but 15" speaker with 25 cps cone resonance, power rating of 45 watts, voice coil diameter 2", total flux 201,000 maxwells. 8½" deep, 15%" diam. Shpg. wt., 30 lbs.

Net 79.50

Only 72.00 Ea. Net GET 2 FOR STEREO

3% LB. MAGNETS 40-WATT 12" 69.50 48-WATT 15" 79.50 Crossover Network 12 db/Octave L-Pad Control





LAFAYETTE-GOODMANS 61/4 LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

● 12" SPEAKER HAS 45 WATT POWER RATING ● 15" 50 WATT • COMPLETE WITH PLUG-IN 12 DB PER OCTAVE L/C CROSSOVER NETWORK & 1-PAD LEVEL CONTROL . HEAVY, DIE-CAST NON-RESONANT FRAMES

SK-114 3-WAY 12" SPEAKER

A highly-efficient 3-wdy 45-watt speaker for faithful re-production of the complete audible spectrum without tane calaration or distortion. Response 30-20,000 cps. Hos ex-clusive Goodmans special process woofer cone with 2' diameter aluminum voice call and cone resonance of 3 cps. 6'4 b. Alcomax magnet (the mast efficient magnetic material available), stiff-coned mid-range radiator with 2000 cps mechanical crossover, and harn-laaded compres-sion-type tweeter with self-aligning aluminum voice call and diaphragm. Magnetic flux density is 14,300 gauss;

total flux is 227,000 maxwells. Supplied with 5000 cps plug-in 12 db per actove electrical network with high frequency level control. 16 ohms impedance. Roted at 45 worts power handling capacity with integrated program material. Ruggedly constructed heavy die cast metal frame minimizes frome resonances; with screw terminals for easy connections, socket for plug-in crossover network and level control harness. Dimensions: 8½ averaged depth, 12½ diam.; takes 11" diam. baffle apening. Shpa. wt., 35 lbs. 5K-114-12" 3-way speaker with 6% lb. magnet. Net 79.50

Only 73.50 Ea. Net GET 2 FOR STEREO SK-115—3.way 15" with 6% lb. magnet. Same as SK-114 but 15" speaker, with power rating of 50 watts and cone resonance of 25 cps. 8%" deep, 15%" averall dlam., requires 13" diam. baffle apening. Shpg. wt., 40 lbs.

Net 89.50

Only 82.00 Eo. Net GET 2 FOR STEREO

6½ LB. MAGNETS 45-WATT 12" 79.50 50-WATT 15" 89.50



NEW! LAFAYETTE 8" HI-FI SPEAKER

. "MECHANICAL 2-WAY" SPEAKER OF UNUSUAL DESIGN . EXTRA-HEAVY MAGNETS. EXTREMELY HIGH FLUX . RESPONSE 40-16,000 CPS . SPECIAL PATENTED CONE CONSTRUCTION AND MATERIAL FOR SMOOTH, DISTORTION-FREE RESPONSE · EXCELLENT FOR STEREO

A most unusual dual-cane construction is used in these extra-high-quality 8" speakers to economically provide the same type of wide-range frequency response narmally found anly in true coaxial speakers or multiple speaker systems. There are 2 separate cones, acting through a common vaice coil. The outer edge of the tweeter cane is attached to the mid-section of the waafer cone; both cones: "float" on flexible, corrugated edges. This mounting, plus apertures provided behind the woofer cane, results in mechanical crossover so that both cones operate in phase of low frequencies, but only the tweeter cane operates at high frequencies. This gives improved high frequency directional

characteristics and minimum distortion. The patented cone malerials provide extremely smooth reproduction. Magnets total flux of 56,000 maxwells. Their high efficiency means good transient characteristics, low distortion, and good response at either high at law sound levels. Terminals are strew-type for solderless connections. Sensitivity is 99.5 db/walt; resonance is 55.70 cps; voice coil is 8 dmiss. Size in 8. diam. 4 ½" deep; requires 6½" diam. baftle open-SK.98 8" 2-WAY SPEAKER

Net 9.95

Only 18.95 Net



Page 14

NEW! LAFAYETTE DUCTED-PORT BASS REFLEX SPEAKER ENCLOSURE

• RECOMMENDED FOR STEREO • NEW DESIGN FOR WIDE-RANGE RESPONSE IN A SMALL PACKAGE . ECONOMICAL-SPACE SAVING . FOR 8" OR 6" SPEAKER

An unusually-designed enclasure which extends low-frequency response to a remarkable degree incorporates a special long duct over the usual bass reflex post which acts tagether with the and smoothness of response at low frequencies. Suitable for 8" or 6" wide-range or coaxial hierarchical hardwaad veneers throughout, hand-rubbed to a light finishes. And eshable in Blande Mohagany, Mohagany, or Walnut firnishes. Size 11 %" x 8" d. Shpg. wt., 15 lbs.

CA8-29 Blande Mahagany, Mahagany, or Wainut Enclosure. Please specify your choice

Net 14.50

FAMOUS LAFAYETTE SK-58 12" COAXIAL



BUILT-IN CROSSOVER Req. COMPLETE WITH BRILLIANCE CONTROL Value

. SHEEPSKIN "FREE. CONE MOUNTING

. 20-WATTS RATING . 1 1/ LB. MAGNET

LAFAYETTE EXCLUSIVE

This exclusive Ladayette import has became nationally famous for its exceptional value. An extremely high quality speaker, frame, 12" woofer section with sheepskin edges and specialty-frame, 12" woofer section with sheepskin edges and specialty-frame, 12" woofer section with sheepskin edges and specialty-frame, 12" high-efficiency as possessed fibre cone material for freedom from distortion and tweeter has a frant-mounted diffusion screen for wide dispersors and of the high frequencies; with the built-in 3000 cps cross-spanse of 30-15,000 cps. Woofer resonance is 40 cps; power handling capacity of the speaker is 20 watts continuous, 35 handling capacity of the speaker is 20 watts continuous, 35 made to screw-cap terminals. If made in this country, this speaker would sell for at least \$49.50. Shpg. wt., 11 lbs.

...Net 29.50

ECONOMY HI-FI COAXIAL SPEAKERS



8"-\$6.25 12"-\$8.75 15"-\$13.75 $6 \times 9 - \$7.95$

ECONOMY 8" COAXIAL HI-FI SPEAKER

IDEAL WIDE-RANGE BUDGET SPEAKER . PER-FECT FOR STEREO . RESPONSE 70-12,000 CPS . BUILT-IN CROSSOVER . 10 WATT RATING . 3.16

OZ. MAGNET

A fine coaxial high fidelity speaker with built-in electronic crossover. Rated at 10 watts, with response of 70-12,000 cps. Rigid, non-resonant frame, high efficiency 3.16 az. Alnica 5 magnet, specially-treated langific cone, and gasket-seated magnet caver contribute to its fine performance. 8 ahm_vaice coil. Shpg. wt., A lbs.

SK-92 LAFAYETTE ECONOMY SPECIALI Net 6.25

COAXIAL SPEAKER

EXTENDED RANGE DUAL SPEAKER
SYSTEMI FOR FM OR AM RADIO,
TELEVISION, SOUND AND WIDE
RANGE RECORD PHONOGRAPHS.
QUICK, EASY, MODERNIZING REPLACEMENT OF OLD STYLE SINGLE RANGE SPEAKERS

RANGE SPEARERS.

12" Alnico V PM with 1" voice coil and heavy one piece cone. Specially designed 3" Alnico V PM tweeter completes this combination speaker, range 40 to 15,000 CPS. Built-in high poss filter. Installs some as regular PM speaker, only two wires to connect. 6.8 az., Alnico V magnet. Impedance 8 ahm. Wt. 8 lbs.

ECONOMY 15"
COAXIAL HI-FI SPEAKER
RATED AT 20 WATTS

• 5" TWEETER

BUILT-IN 1800 CPS CROSSOVER

RESPONSE 45-12,000 CPS

This dual-speaker system provides clean, extended response of 45 to 12,000 cps. Includes 15" woafer with coaxially mounted 5" tweeter and built-in 1800 cps crossover. Heavy, non-resonant frame, anti-corrosion treated; 6.8 oz. Alnica 5 magnet, 8 ohm voice coil. 20 watts power rating. Shpg. wt., 11 lbs.

SK-89 LAFAYETTE ECONOMY SPECIALI Net 13.75

6x9 "Twin-Tweeter" COAXIAL HI-FI SPEAKER

. EXCELLENT BASS RESPONSE

. BUILT-IN CROSSOVER

. ADD HI-FI TO AUTOS, TV, RADIO SETS

This 6" x 9" hi-fi cooxial speaker opens new possibilities This of x y hist country speaker opens new possibilities for high-fidelity reproduction. Comport enough for your car, for radio and television sets—and for the high-fidelity enthusiast with a space problem. Twin high-frequency tweeters are designed to cross over mechanically at 5000 cps. The excellent bass characteristics of the 6 x 9 woofer cpt. The excellent dass characteristics of the 6 x 9 waafer faithfully reproduce the law frequencies. High-energy Alnica 5 magnet; vaice coil 3/4" diam. Power handling capacity 4 watts (7 watts an peaks). 4" deep. Impedance 3.2 ohms. Shpg. wt., 21/2 lbs.

SK-75 - 6" x 9" hi-fi speaker.

10.95

ACOUSTIC BAND EXTENDER Converts Any 12" Hi-Fi Speaker To A Complete 4-Way System MOUNTS AXIALLY ON 12" SPEAKER

ELIMINATES EXTRA

CARPENTRY 3-WAY INTEGRATED SPEAKER

FROM 1,000 to 18,000 CPS

25 WATTS RATING **BUILT-IN CROSSOVER**

BUILT-IN CROSSOVER


A real boan to the hi-fi enthusiast who has a single speaker and wants to extend the upper tanal range of his system and at the same time improve extend the upper tanal range of his system and at the same time improve the vital middle ranges for better realism and fuller enjayment. The Acoustic Band Extender includes 3 acaustic channels in one housing. One channel, its Band Extender includes 3 acaustic channels in one housing. One channel, 1-3.5 kc, is a rear loading exponential dual flared harn energized by the loading dual harn, while the third channel, 3.5 to 3.5 kc, is a front-rear of the driver diaphragm. The second channel, 3.5 to 1.8 kc, is direct free loading dual harn, while the third channel, 5.5 to 1.8 kc, is direct free aperture loaded. Wide-angle saund radiation is assured by the design for aperture loaded. Wide-angle saund radiation is assured by the design for upon the distribution of the added brilliance and presence supplied by this thorough distribution of the added brilliance and presence supplied by this unit. The driver unit has a highly efficient 3.2 az. Alniça 5 stug magnet unit. The driver unit has a highly efficient 3.2 az. Alniça 5 stug magnet unit. The driver unit has a highly efficient 3.2 az. Alniça 5 stug magnet unit. The driver unit has a highly efficient 3.2 az. Alniça 5 kg magnet unit. The driver unit has a highly efficient 3.2 az. Alniça 5 kg, are cangular unit. The driver unit has a highly efficient 3.2 az. Alniça 5 kc, is a front-rear driver unit has a highly efficient 3.2 az. Alniça 5 kc, is a front-rear driver unit has a highly efficient 3.2 az. Alniça 5 kc, is a front-rear driver unit has a highly efficient 3.2 az. Alniça 5 kc, is a front-rear driver unit has a highly efficient 3.2 az. Alniça 5 kc, is a front-rear driver unit has a highly efficient 3.2 az. Alniça 5 kc, is a front-rear driver unit has a highly efficient 3.2 az. Alniça 5 kc, is a front-rear driver unit has a bright 5K-120

SPEAKERS AND SPEAKER SYSTEMS ARE AVAILABLE ON LAFAVETTE'S EASY PAY PLAN - SEE PAGE 38

LAFAYETTE 2-3 WAY SPEAKER SYSTEMS & ENCLOSURES

At Economy Prices - SAVE 25% to 50%

HI-FIDELITY WOOFERS



15" HI-FI LOW FREQUENCY WOOFER . 31.5 OZ. ALNICO MAGNET • 20 TO 5000 CYCLES-35 WATTS

This efficient 15" low frequency woofer incorporates many exclusive features. For ariginal equipment or replacement, it provides highly efficient extended low-frequency response. Ideal for assembling 2- and 3-way speaker systems. Mandles 35 waits of audio power. Frequency response ± 2 db 20 CPS to 1000 CPS./and ± 5 db from 20 CPS to 5,000 CPS with proper boffling. Voice call dia. 2", impedance 8 ohms. 31.5 as. Alnico V magnet. Finished in beautiful brown enomel. Cane is seemless type, permonently bound to voice coil. Shpg. wt., 13% lbs. Cane Resonance 45 cycles

Net 23.95

SK-67 12" HI-FI LOW FREQUENCY WOOFER 21.5 OZ. ALNICO V MAGNET-25 WATT

Provides efficient, extended low-frequency response of ± 5 db from 35 to 8000 CPs, and features 25 wolts of power handling copocity. Perfect for high-fidelity installations or far madernization of older equipment. Ideal for assembling 2 and 3-way speaker systems at a budget price. Enclased magnet structure—completely dust-proaf. Compliance of nater cone and inner spider carefully calculated for best bass response. 21.5 oz. Alnica V magnet. 1% dio. volce coil, 8 ahm impedance. All exposed surfaces are finished in beautiful brown enamet. Shaps. wt., 8 lbs. Cone Resonance 50 cycles.

Net 16.50 5K-68

8" MID-RANGE WOOFER



law frequency bass reproducer, free from distortion A low frequency boss reproducer, free from distortion and capable of cleen reproduction down to 40 cycles. Ideal for use with tweeters and crossover networks to make up a 2-way or 3-way system. Can also be used with additional speakers as a multi-speaker wooter. Perfect, too, as mid-range unit in low cost 3-way systems. Crossover at 350 CPS; frequency response 350. 13,500 cycles; suitable for crossover to 5000 cycles. Impedance 8 ahms. Cane Resonance 150 cycles. Shpp. wt., 4 lbs.

Net 6.50



GE 12" PM HI-FI SPEAKER

- . HANDLES 25 WATTS
- . 14.5 OZ. ALNICO V MAGNET
- FREQUENCY RESPONSE
- 50-15,000 CPS . ALUMINUM VOICE
- COIL

This GE deluxe speaker was designed by audio engineers to meet the high standards of performance so essential to high-fieldity and for dependability and durability. The field with resultant aprimum ensitivity and domains for field with resultant substances and so exclusive the property cycles which may be estended to 30 cycles in property cycles which may be estended to 30 cycles in property cycles which may be estended to 30 cycles in property cycles which may be estended to 30 cycles in property cycles which may be estended to 30 cycles in property cycles which may be estended to 30 cycles in property cycles which may be estended to 30 cycles in property cycles. The second to a second to a cycle of the cycles with the cycles of the 5K-60 Shop. wt., 7 lbs.

IMPORTED FROM DENMARK





ROYAL DANISH 12" DUAL CONE

- . HIGH FIDELITY MODEL
- RANGE: 45-14,000 cps.
- . HIGH FLUX DENSITY

Lafoyette brings you this fine imported high fidelity speaker at a fraction of the price you would expect to pay for so much quality. Two cones are mounted on a single axis, and provide remarkable wide range frequency response from 45 to 14,000 cps. Reproduction of program material is exceptionally lifelike throughout the entire range. An exclusive, specjal formula cone rim treatment eliminates cone rim resonance and distortion. Also, the damping effect improves transient response and prevents "hongover". Overall depth, 5-3/16". Completely enclosed, 1" diameter vaice call with an impedance of 6 ahms. Shaps. wt., 6 lbs.

SK-86. 12" Dual Cane Hi-Fi Speaker Net 7.95










ASIC INTERNAL CONSTRUCTION OF LAFAYETTE UNIVERSAL HI-FI SPEAKER ENCLOSURES



CAB-16-17 LAFAYETTE HI-FI SPEAKER ENCLOSURES FOR UNITARY 2-WAY-3-WAY SPEAKER SYSTEMS

LAFAYETTE RESONATOR ENCLOSURES

THE CABINET—New, lowboy consolette resonator cabinet for 12" high fidelity speakers. Completely assembled and finished unit constructed of %" stock of the finest genuine mahogany and walnut veneers. Solidly built and acoustically designed to provide wide range frequency response without reverberation or vibration. Cabinet is lined with acoustic material to prevent cabinet resonance. Front panel has at-

LAFAYETTE UNIVERSAL HI-FI SPEAKER ENCLOSURES

LAFAYETTE UNIVERSAL SPEAKER ENCLOSURES are "universal" in the sense that almost any combination of speakers can be installed in the cabinet. Has cutout for 15" speaker plus adapter for 12". Also a cutout for 84" or 8" speaker plus adapter for 5" and blank wood block if

such speakers are not desired. In addition, a tweeter opening is provided for most standard tweeters, plus adapter for Lafayette HK-3, HW-7 or Lafayette-Goodmans SK-104 tweeters plus blank wood block if no tweeter is used.

UNIVERSAL BASS REFLEX ENCLOSURES

Solidly constructed of 4" stock. Finished models of genuine veneers of the original wood. Universal speaker panel is detailed with picture frame molding and covered with pleasing plastic grille. 5" tapered offset legs are edge-tipped with brass ferrites, Lined internally with acoustic material. Size of lowboy (less legs): 28%" w, 23½" h, 16%" d. Same

size for highboy with height and width interchanged. Shpg. wt., 54 lbs. CAB-13—Highboy; CAB-14—Lowboy. Unfinished ... Net 39.50 CAB-19—Highboy; CAB-20—Lowboy. In Mahogany or Blonde (please specify flinish) ... Net 49.50 CAB-21—Highboy; CAB-22—Lowboy. In Walnut ... Net 52.50

57-269† University UXC-122 57-270 University UXC-122

\$Y-270 University URC-122
\$Y-271 Electro-voice \$P128
\$Y-272 Electro-voice \$P128
\$Y-273 Lafayette \$M-38
\$Y-274 Lafayette \$M-38
\$Y-274 Lafayette \$M-38
\$Y-275 Electro-voice 1279XB
\$Y-276 Electro-voice 1279XB
\$Y-277 Jensen CX120

COMBINATIONS WITH LAFAYETTE

RESONATOR ENCLOSURE -

Speaker

SPECIAL MONEY SAVING COMBINATIONS-LAFAYETTE CABINETS AND NATIONALLY FAMOUS SPEAKERS

COMBINATIONS WITH LAFAYETTE UNIVERSAL CABINETS.

Stock No.	Speaker	Enclosure	Reg. Price	Special Combin- otion Price
\$V-179 \$V-180 \$V-181* \$V-182 \$V-183 \$V-184*	University 6303 University 6303 University 6303 University 6303 University 6303 University 6303	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	120.84 130.84 133.84 120.84 130.84	99.50 109.50 112.50 99.50 109.50 112.50
57-185 57-186 57-187 57-188 57-189 57-190	University 312 University 312 University 312 University 312 University 312 University 312	CAB-13 CAB-19 CAB-21 CAB-14 CAH-20 CAB-22	108.10 118.10 121.10 108.10 118.10 121.10	90.95 100.95 103.95 90.95 100.95
\$7.191 \$7.192 \$7.193* \$7.194 \$7.195 \$7.196*	Electro-Voice 12TRXB Electro-Voice 12TRXB Electro-Voice 12TRXB Electro-Voice 12TRXB Electro-Voice 12TRXB Electro-Voice 12TRXB	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	104.18 114.18 117.16 104.18 114.18 117.18	84.75 94.73 97.75 84.73 94.75 97.75
57.197 57.198 57.199 57.200 57.201 57.202	Electro-voice 1STRXB Electro-voice 1STRXB Electro-voice 1STRXB Electro-voice 1STRXB Electro-voice 1STRXB	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	116.92 126.92 129.92 116.92 126.92 129.92	93.50 103.50 106.50 93.50 103.50 106.50
57.203 57.204 57.205 57.206 57.207 57.208	Jensen H223F Jensen H223F Jensen H223F Jensen H223F Jensen H223F Jensen H223F	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	112.00 122.00 125.00 112.00 122.00 125.00	93.75 103.75 106.75 93.75 103.75 106.75
57-209 57-210 57-211 57-212 57-213 57-214	Jensen CX120 Jensen CX120 Jensen CX120 Jensen CX120 Jensen CX120 Jensen CX120	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	89.00 99.00 102.00 89.00 99.00	76.50 86.50 89.50 76.50 86.50 89.50

	Stock No.	Speaker		Enclosure	Reg. Price	ation Price
0000	5V-215 5V-216 5V-217 5V-218 5V-219 5V-220*	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SM-110 SM-110	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	87.00 97.00 100.00 87.00 97.00	84.00 94.00 97.00 84.00 94.00
	57-221 57-222 57-223 57-224 57-225 57-226	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans		CAB-13 CAB-19 CAB-21 CAB-21 CAB-20 CAB-22	94.00 104.00 107.00 94.00 104.00	91.00 101.00 104.00 91.00 101.00
5	\$7.227 \$7.228 \$7.229 \$7.230 \$7.231 \$7.232	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SM-112 SK-112 SK-112 SK-112 SK-112 SK-112	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	109.00 119.00 122.00 109.00 119.00 122.00	103.00 113.00 116.00 103.00 113.00 116.00
00000	5Y-233 5Y-234 5Y-235* 5Y-236 5Y-237 5Y-230*	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	5K-113 5K-113 5K-113 5K-113 5K-113	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	119.00 129.00 132.00 119.00 129.00 132.00	111.50 121.50 124.50 111.50 121.50 124.50
3	\$Y-239 \$Y-240 \$Y-241 \$Y-242 \$Y-243 \$Y-244	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-114	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	119.00 129.00 132.00 119.00 129.00 132.00	113.00 123.00 126.00 113.00 123.00 126.00
00000	\$Y-245 \$Y-246 \$Y-247* \$T-248 \$Y-249 \$Y-250*	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-115	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	129.00 139.00 142.00 129.00 139.00 142.00	121.50 131.50 134.50 121.50 131.50
-	*Specify	Walnut or Blonde fir	olsh.			

5V-2781 University 312 5V-280 University 312 15pecity Markets

New! Lafayette COMPRESSION-

NOTE: FOR Combinations of Lafayette Ocluxe Universal Cabinets and Lafayette-Goodmans 3-way speakers, see other pages.

HORN TWEETER . RESPONSE 1500-16,000 CPS . 20 WATTS . EXPONENTIAL HORN . FOR 2-WAY, 3-WAY OR 4-WAY SPEAKER SYSTEMS . WIDE-ANGLE DISPERSION OF HIGHS . FOR TOP OR IN-

CABINET MOUNTING

Enclosure Price

CAB-16 61.84 53.75 CAB-17 63.84 55.75

CAM-16 63.80 53.50 CAM-17 65.80 55.50 CAB-17 85.80 55.50 CAB-17 81.00 57.00 CAB-18 94.18 74.75 CAB-17 86.18 76.75

CAB-16 79.00 66.50 CAB-17 81.00 68.50

CAB-16 98.10 80.75 CAB-17 100.10 82.76

ation Price

A high quality compression-driver tweeter with a frequency response of 1500-16,000 cps and a continuous duty rating of 20 watts. Vertical positioning of the mouth of the exponential harn provides widest dispersion of high frequencies of ear-height. With chrome-plated fork-type swivel base. Flux density is a high 13,500 gauss for greatest efficiency; crossover range is 2800 cps or higher, with 4000-5000 cps recommended for 3-way systems; the wide, smooth response range permits it to be used with 2-, 3-, or 4-way speaker systems. The exponential horn is a heavy, one-piece costing non-resonant within the audible frequency range. Vaice cail impedance is 8-16 ohms. Chrome-plated screw terminals for easy connections, Overall height with swives stand is 4%"; width 2%"; behind-ponel mounting requires a rectangular cutout (long oxis vertical) 1%" x 4-3/16", Shpg. wt., 3 lbs. SK-105 Compression-driver Morn TweeterNe

LAFAYETTE 3-W A V S V S T E M

WOOFER . 8" MID-RANGE SPEAKER . HORN TWEETER . CROSSOVER NETWORK





This new multi-speaker system provides true bish fidelity re-production at the lowest price ever. Included in the 3-way system are a Jensen L5" woofer, Jensen 8" mid-range speaker, Jensen 6" mid-range speaker, Jensen LN-3 capacitance-inductance crossover network. Crossover is at 350 and 5000 cycles, and unit is supplied with two, built-in, continuously variable "presence" and "brilliance" controls wired on 2-ft. extension cables. Outstanding bass and mid-highest audible frequencies result in superh performance from this 3-way system throughout the entire audio spectrum. Fower handling capacity in bass reflex enclosure, 25 watts. Impedance 16 ohms. Shpg., wt., 19 lbs.

5Y-98-Speaker System SY-98 Same as SY-98 but with 12" Jensen woofer

Completely assembled bass reflex cabinets constructed of %" hardwood, ready for finishing. Dimensions of highboy, less legg: 29" H, 23½" W, 16" D. Lowboy same size with H and W dimensions interchanged. Legs are 5" H. Shpg. wt., 42 lbs.

Net 39.50 CAB-13-PREASSEMBLES UNFINISHES HISHORY CASINET Net 39.50

IENSEN B-INCH CK-10 Unfinished Highboy Speaker Cabinet Kit Net 29.50 MID-RANGE CK-11 Unfinished Lowboy Speaker Cabinet Kit Net 29.50



ACOUSTIC **RESEARCH AR-1** & AR-2 SPEAKER SYSTEMS

Bosed on new "acoustic suspension" prin Bosed on new "acoustic suspension" principle. Affords lowest bass harmonic distortion and extended low freq. response, AR-1 includes a 12" low-freq. mechanism and an 8" mid-range and high-freq. unit. Uniform response to 15,000 cps. AR-2 includes a 10" speaker and a lweeter in a cobinet slightly smoller than AR-1. Shpg. wt., AR-1: 60 lbs; AR-2: 45 lbs.

		5022			
ACOUSTIC RESE	ARCH AR-1	(Mahogany or b	oirch)	Net	185.00
ACOUSTIC RESE	ARCH AR-1	(Walnut)		Net	194.00
ACOUSTIC RESE	ARCH AR-1	(Korino)		Net	200.00
ACOUSTIC RESE	ARCH AR-2	(Mahogany or I	birch)	Net	96.00
ACOUSTIC RESE	ARCH AR-2	(Walnut)	-	_ Net	102.00
ACOUSTIC RESE	ARCH AR-2	(Korino)		Net	111.00

2 OR 3 WAY CROSSOVER NETWORK




- 4 CROSSOVER FREQUENCIES
- . L PAD BALANCE **CONTROLS**
- . EASY TO USE . IMPEDANCE 16-OHMS

The LN-7 Crossover Network combines quality performance, beauty and versatility at an unbeatable price. It can be used in a two-way system by crossing over at 500 cps or 3300 cps, and in a three-way system by utilizing the two simultaneously: The change from a 2-way to a 3-way 6 db per active network may be accomplished easily. Complete with two level balance controls. Size: 5% x 2% x 2%". Shpg wt... 2% Ibs

BUILD-YOUR-OWN SPEAKER ENCLOSURES ASSEMBLE HI-FI ENCLOSURE KITS and COMPLETE SPEAKER SYSTEMS

AT TREMENDOUS SAVINGS TO YOU! Entire Cabinet Smoothly Sanded Ready for a Fine Finish





LAFAYETTE UNIVERSAL HI-FI

LAFAYETTE UNIVERSAL HI-FI
BASS REFLEX ENCLOSURE KITS

• EASIEST TO ASSEMBLE — ALL YOU NEED IS A
SCREWDRIVER! • ½" WHITE BIRCH • PRECISIONCUT — FITS TOGETHER SMOOTHLY • PERFECT FOR
SINGLE WIDE RANGE, 2-WAY OR 3-WAY SPEAKER
SYSTEMS • HIGHBOY OR LOWBOY STYLE
All pieces of these carefully designed bass reflex high
fidelity speaker enclosures are accurately precut of ½"
veneers to fit snugly together and eliminate spurious
resonances. Front panels are handsomely detailed with
picture-frame moulding and covered with pleasingly
decorative plastic acoustic grilles to hlend with any finish
and room decor. Attractively tapered offset legs, are protected by good-looking brass ferrules. Acoustic lining maprovided for 15" speaker plus adapter for 12"; 8½" or 8" midrange plus adapter
for 5" and blank wood block if no midrange speaker is used; Jensen conpression horn tweeter plus adapter for Lafayette Hk-3, HW-7 or Lafayette
Goodmans 5K-104 tweeters plus hlank wood block in to tweeter is used. Thus,
any single wide-range 12" or 15" speaker may be used, or any Lafayette 2- or
3-way speaker system, or almost any other combination of speakers. Kits are
supplied unfinished, smoothly sanded and ready for finishing. The lowboy-style
cabinet dimensions are (less legs) 28½" w x 23½" h x 16¾" d; legs are 7"
high. Highboy has same dimensions with height and width interchanged.
Instructions, all parts, hardware, and grille are included with each kit. Shpg.
wt., 54 lbs.

CK-10 Unfinished Lowboy Enclosure Kit.

Net 29.50

wt., 54 lbs.

CK-10 Unfinished Highboy Enclosure Kit Net 29.50

CK-11 Unfinished Lowboy Enclosure Kit Net 29.50

FINISHING KITS

To obtain professional-like furniture finishes. Include stain, filler, scaler, shellac, varnishes, finishing paper, brushes, and detailed instructions. Shpx. wt., 6 lbs.

FK-10 Walnut . FK-20 Mahogany . FK-30 Fruitwood .

FK-40 Cherry . FK-50 Golden Oak . FK-60 Ebony .

S.88

Factory-Assembled Bass Reflex Enclosures

Same as the Lafayette kits above but factory-assembled and finished in lustrous, hand-rubbed mahogany or blonde to measure up to the finest standards of high quality fine-furniture finishes. Also available assembled but unfinished. Shpg. 4.5.4 lbs.

wt., 34 lbs. CAB-13 Assembled. Unfinished Highhoy CAB-19 Highboy, Assembled, finished in Mahogany or Blonde (olease soecity) Net 49.50 CAB-21 Highboy Assembled. In Walnut Finish.
CAB-14 Assembled, Unfinished Lowboy.
CAB-20 Mahogany or Blonde Lowboy, completely assembled (please specify choice of finish). Net 49.50

LAFAYETTE-GOODMANS High Fidelity Speakers FROM ONE OF ENGLAND'S



3-WGY SPEAKER SYSTEM

NANOLES 30 WATTS • FAMOUS RRAISH GOOD.
MANS-MADE 12" WOOFER, BM, "MIDRANGE, COMPRESSION-ORIVER NORM TWEETER • LAFAYETTE L/C.
SION-ORIVER NORM TWEETER • LAFAYETTE L/C.
Here is an outstanding 3-way high fidelity speaker system which we are indeed proud to be able to offer. It includes a group of speakers custom-made for Lafayette by Goodmans, famous English manufacturer of some of the world's best high fidelity speakers. The system is ideal for installation in Lafayette bass reflex speaker enclosures, and provides the extremely wide range of 30 to 16,000 cps (8 db down at 20,000 cps) smoothly and without unpleasant peaks. Power handling capacity of the system is 30 watts of integrated program material. Included in the system are the Lafayette-Goodmans SK-102 12" woofer covering the range from 30 to 700 cps, the Lafayette-Goodmans SK-103 8½" midrange speaker covering 700 to 5,000 cps, and the Lafayette-Goodmans SK-104 compression -driver tweeter operating at from 5,000 cps to over 16,000 cps. Also included is the Lafayette LN-5linductance-capacitance (L/C) crossover network with attached Brilliance (high-frequency) and Presence (midrange) controls. System impedance is 16 ohms. This is a really great system at an unusually low price! Shpg. wt., 25 lbs.

SY-103 Lefoyette-Goodmans
3-WM 5-104 cloopedanas

SY-163 Lafayette-Goodmans
3-Way Speaker System Net 49.50

LAFAYETTE-GOODMANS 15" 3-WAY SYSTEM

An austanding 3-way speaker system similar to SY-163 system above, but featuring the new SK-101 15" Lafayette-Goodmans waafer for extra high efficiency even at subaudible frequencies. System response 25 to 16,000 cps. Complete with LN-5 crossover network and SK-103 8½" midrange speaker and SK-104 tweeter. A superb speaker system with wide, smooth response and a new low in distortion and tone coloration.

SY-177 Lofayette-Goodmans, 3-Way 15" Speaker Nei 54.50 SK-104 Lafayette-Goodmans Tweeter . . . Net 10.95

LEADING SPEAKER MFR'S!

CAB-22 Lowboy Assembled, in Walnut Finish

Made to Lafayette's own rigid specifications LAFAYETTE-GOODMANS 15" WOOFER

An all new 15" low-frequency speaker featuring smooth, powerful reproduction down into the sub-audible frequencies. Its rigid construction and high efficiency design permit the reproduction of even the loudest low frequency transients without ringing or distortion. Response 25 to 7000 cps. Alcomax magnet with flux density of 13,000 lines and total flux of 89,500 maxwells assures the utmost linearity at full power —30 watts of program material, Voice coll diameter 134" SK-101 lmpedance 16 ohms. Shog. wt., 15 lbs.

SK-101-15" Lafayette-Goodmans Woofer Net 28.50

LAFAYETTE-GOODMANS 12" WOOFER A highly-efficient low-frequency transducer for faithful reproduction of the lowest audible frequencies without tone coloration or distortion. Incorporates high flux Alcgmax magnets for smooth response and good power sensitivity. Frequency response is 30-7,000 cps, with recommended crossover at 700 to 1000 cps, Total flux is 89,500 maxwells; voice coil diameter is 1½". Rated at 30 waits power handling capacity for integrated program material in a multiple speaker system with an LC crossover network. Voice coil impedance 16 ohms. Size 12½" dam. x 6" deep. Shpg. wt., 9 lbs.

SK-102 12" Lafayette-Goodmans Woofer Net 23.50 LAFAYETTE- 8 1/2" MIDRANGE SPEAKER

OODMANS

Alamipum Cere and Self-Centering Aluminum Valce Ceil

A sweet-sounding high-fidelity eproducer capable of doing full justice to the most important range of musical reproduction — the mid-trequency range from 500 to 5,000 cps. Incorporates high-efficiency Alcomax magnets, a specially-constructed cone with an "accordion fold" half-way down for smooth sound reproduction tree from peaks and distortion; plus a completely sealed rear housing to prevent back randation and interaction with other speakers. Response is 500 to 8,000 cps. Recommended crossovers are 700.1000 cps at the low end, 5,000 cps at the high end in a 3-way system. Magnet total flux is 32,900 maxwells. Voice coil diameter is 1". Power rating is 30 watts program material in a 3-way system. Magnet total 50 watts program material in a 3-way system. Magnet total 50 watts program material in a 3-way system. Magnet total 50 watts program material in a 3-way system. Midrange Net 5.95

SK-103 81/2" Lafayette-Goodmans Midrange Net 5.95

high frequency DRIVER and HORN

A highly efficient compression-type wide-angle radiator for the highe audio frequencies. With high flux Alcomax magnets. Rigid plass thorn with circular mouth and special design acoustic chamber with phasing plug achieves smooth wide-angle distribution to extreme high frequencies. Horn diameter 2½½, mouth opening 1½½, diameter 32½, mouth opening 1½½, diameter 32½, mouth opening 1½½, diameter 32½, diamete

Net 52.50




Famous 3-WAY SYSTEM

SK-101

EXPLODED VIEW SHOWS SYSTEMS MOUNT IN CABINET

with 15" WOOFER...8" MID-RANGE SPEAKER... HORN TWEETER... **CROSSOVER NETWORK**

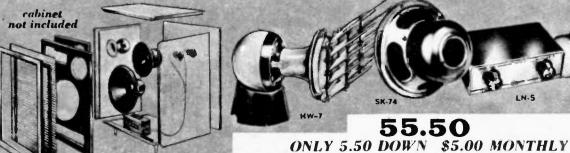

• 15-INCH WOOFER WITH 31.5 OZ. MAGNET (SK-67)
• 15-INCH WOOFER WITH 31.5 OZ. MAGNET (SK-67)
• 10-INCH MID-RANGE SPEAKER (SK-74)
• 3-WAY CROSSOVER NETWORK (LN-3)

Lafayette presents this outstanding 3-way speaker system designed for the high fidelity enthusiast who desires performance formerly possible in multi-speaker systems costing many times this price. You won't believe your ears when you hear the superb reproduction throughout the entire audio spectrum. The SK-67-15" woofer provides phenomenal bass response, the SK-74-8" speaker delivers full bodied, mid-range frequencies, and the HW-7 high frequency acoustical lens tweeter faithfully reproduces the highest audible frequencies. Crossover points at 350 and 5000 cycles are provided by the LN-5-3-way inductance-capacitance network with continuously variable presence and brilliance controls that adjust tone balance to personal taste. Shog. wt., 25 lbs.

SY-93—Complete System as listed above.

Net 55.50

HIGH FREQUENCY TWEETER WITH ACOUSTIC LENS DIRECT IMPORTATION MAKES THIS PRICE POSSIBLE!

FREQUENCY RESPONSE FROM 2000 CPS TO BEYOND AUDIBILITY LOUVERED ACOUSTIC LENS FOR UNIFORM SOUND DISPERSION HANDLES 25 WATTS OF POWER PRICED EXCEPTIONALLY LOW

PRICED EXCEPTIONALLY LOW

New high frequency tweeter featuring a lauvered acoustic lens far uniform sound dispersion and capable of handling up to 25 wotts of distortion-free power. The directional tendency of high frequency notes is avercome by the natural wide dispersion angle of the short harn and the acoustic lens which disperses and radiates the high notes smoothly throughout the entire listening area. The lens is detachable for panel mounting, with a separate base for the tweeter furnished for external mounting where desired. Aluminum vaice cail has 16 ahms impedance. Size: 4½ "lang x 3" dlameter, lens extends 2½". Requires a crossover network, preferably ane with a level control, such as the LN-2. With full instructions. Shpg. wt., 5 lbs.

FAMOUS LAFAYETTE HK-3



METAL-CASED CONE TYPE HI-FI TWEETER

OUTPERFORMS TWEETERS COSTING MANY TIMES THE PRICE

EQUENCY RESPONSE 2000 - 16,000 CPS HANDLES 20 WATTS OF POWER

Highest quality cone type high frequency tweeter having a range from 2000 to 16,000 cycles. Especially efficient at higher end of audio spectrum where other cone type tweeters tend to lone clarity and volume. Entirely closed in a metal case with a base so that it can atsaid by itsiff or be mounted on a flat surface with mounting backet supplied. Rated to handle 20 watta of power. A crossover network is required; the Lafayette LN-2 is ideal. Voice coil impedance 8-16 ohms. Size: 3½ x 2½ x X 3″ Diam. Shpg. wt., 3 lbs.

NEW! METAL CASED TWEETER SPECIAL PRICE

FREQUENCY RESPONSE 3,000-16,000 CPS HANDLES 20 WATTS OF POWER CHOICE OF 8 OR 16 OHM IMPEDANCE

The modest price of this tweeter gives no indication as to its high quality. Smooth, silky reproduction of the high frequencies along with an even sound dispersion is insured by the use of the round cone. The tweeter assembly is protected by a heavy wire mesh screen and completely encosed in an attractive Satin Gold metal. As a result at the rear cosing on the tweeter, speaker interaction between speakers has been eliminated allowing for the placement of the tweeter in the same enclosure with the wooter and mid-range speakers. Supplied with study attached mounting stand and 2½ ft. hook-up card. Size 2½ diam. x 2" deep. Shpg. wt., 2½ lbs.

SK-121 8 ahm Tweeter Net 2.95

SK-122 16 ahm Tweeter Net 2.95

LAFAYETTE 2-WAY CROSSOVER NETWORK

ADJUSTS TO EITHER 2500 OR 5000 CPS CROSSOVER FREQUENCY

8.75

A carefully designed capacitive inductive 2-way crassover network with crassover frequency easily set to either 2500 ar 5000 cycles. Has a built-in continuously variable high-frequency "Brilliance" level control to match raom acoustics perfectly. Control has a 2½ ft. cobbe to maunt on rear or side to the common set of the common set o

LN-2B 2-Way Crassover Network With Control......Net 8.75

NEW! 2- and 3-way L/C CROSSOVER NETWORK



METAL CABINET BUILT-IN BRILLIANCE


This versatile unit can be used either as a 2-way or 3-way 6 db. per octave network, simply by loasening a few screws on the rear terminal panel and thifting several wires. You can use this network for a 2-way system now, easily and quickly convert to 3-way later. Six crossover with 2000-3000 cycle or 5000 cycle crossover, and 3-way with crossover frequencies of 350 and 5000, 350 and 2000-3000, 700 and 2000-3000 ar 700 and 5000 cycles—a total of four different crossover frequencies! Suitable for 8-16 ohm speakers. The network is housed in an attractive metal case, suitable for mounting inside enclosure or leaving out in the open. Two level controls—Brilliance and Presence controls—are maunted an the front panel. If desired, these level controls may be removed, along with the beautiful gleaming capper escutchean plate, for external mounting; controls are wired with 3-faat lang leads. High quality components are used for lang leads. LN-5 befovette L/C Crossover.

LN-S Lafayette L/C Crossover Net 14.95

TAIPATY BYPYPE

UDIO & PHONO

LAFAYETTE SPECIAL VALUES IN T PADS, FADERS AND SPEAKER SWITCHES.



Remote Speaker Switch (C). Connects remote speaker to any existing set. Turns both on or either speaker on or off. With gold embossed plate for front panel mounting. Shpg. wt., 6 oz. MS-469 With all parts and instructions. Net .95

Multiple Speaker Switch (A). Constant impedance device for controlling any 6 remote speakers; up to 63 different combinations. Wall mounting with brass plate. Shpg. wt., 10 oz. MS-459 With instructions and hardware Net 2.10

Multiple Speaker Switch (M). Identical to above but mounted on filot, gold-embossed plate for mounting on flot ponel, 3½" x 2½". Shpg. wt., 10 oz.

Speaker Selector Switch (B). Selects 3 speakers in Net 2.19

Speaker Selector Switch (B). Selects 3 speakers in Net 2.19

Speaker Selector Switch (B). Selects 3 speakers in Net 2.10

Remote Speaker Switch (F). Same as MS-469 except for wall mounting. Shpg. wt., 6 oz.

Net 1.50

Net 1.50

Net 1.50

Speaker Fader (E). Provides adjustable volume level for Radio, TV, Hi-Fi and remote speaker will diminishing volume on the other. May also be used to adjust volume for 1 speaker. Gold plate for front panel mounting. With instructions. Shpg. wt., 6 oz.

VC-53

Net 2.50

Net 2.50

Net 2.50

Net 2.50

Net 3.50

Net

Remote Speaker Fader (G). Same as VC-53 except

for wall mounting. Shpg. wt., 6 oz. VC-54 ...Net 1.55

VC-52 16 ohm T Pad Net 3.85

NEW LAFAYETTE L PADS

0 0 0 0 0 0 00 00




New L pads for use as "brilliance" controls to vary tweeter level, or as "presence" controls to vary mid-range speaker level. Both wirewound elements are concentrically mounted within one plastic housing. With gold-finished metal escutcheon plate, mtg screws, and attractive black knob. Size: 1-9/16" dia., %" deep (less shaft), 2\%" deep overall. Shpg. wt., 6 oz. Net 1.49

VC-49-L pad for B ohm circuits

VC-50-L pad for 16 ohm circuits

Net 1.49



90° PHONE PLUG (A) TO VARIOUS CONNECTIONS, Std. ¼" sleeve; completely shielded. All cables shielded except * unshielded parallel

RCA TYPE PHONO PLUG (B) TO VARIOUS CONNECTIONS. All cables shielded except * unshielded parallel cable.

Stock No.	One Termination	Cable Length	Other Termination	Net
MS-545	90° phone plug (A)	72 in.	Stroight RCA phano plug (B)	.72
MS-546	90° phone plug (A)	72 in.	Straight RCA phono jack (D)	.85
M5-547	90° phone plug (A)	72 in.	Straight barrel phone jack (C)	.93
MS-548	90° phone plug (A)	72 in.	Mike connector (F)	.93
M5-549	90° phone plug (A)	120 in.	Mike connector (F)	1.20
MS-550	96 phone plug (A)	72 in.	90° RCA phono plug (E)	.72
MS-551*	90° phone plug (A)	72 in.	Stripped and tinned ends (J)	.51
M5-552*	90° phone plug (A)	72 in.	-Alligator clips (1)	.68

PHONE PLUG (G) TO VARIOUS CONNECTIONS. Std. 1/4" diam. sleeve;

completely shielded. All cables shielded.					
Stock No.	One Termination	Cable Length	Other Termination	Net	
MS-485 MS-553	Straight phone plug (G) Straight phone plug (G) Straight phone plug (G) Straight phone plug (G)	72 in. 72 in.	RCA-type phono jack (D) Borrel-type phone jack (C) Mike connector (F) Mike connector (F)	.79 ,79 .93 1.26	

ock No. One Termination	CableLength	Other Termination	Net
S-486 Straight RCA phono plug (8 S-480 Straight RCA phono plug (8 S-481 Straight RCA phono plug (8 S-483 Straight RCA phono plug (8 S-483 Straight RCA phono plug (8 S-484 Straight RCA phono plug (8 S-555 STRAight RCA phono plug (8	60 in 72 in, 48 in, 60 in, 72 in,	Stroight RCA phono plug (8) Stroight RCA phono plug (8) Stroight phone plug (G) RCA-type phono jack (D) RCA-type phono jack (D) Borrel-type phone jock (C) Mike connector (F)	

90° RCA PHONO PLUG (E) TO VARIOUS CONNECTIONS. All cables shielded

Stock No.	One Termination	Cable Length	Other Termination	Net
MS-558 MS-559*	90° RCA phono plug (E) 90° RCA phono plug (E) 90° RCA phono plug (E) 90° RCA phono plug (E)	72 in. 36 in.	Barrel-type phone jack (C) Mike connector (F) Stripped and tinned ends (I) Alligotor clips (I)	.72 .88 .32 .63

SPECIAL 10 FT. JUMPER CABLE. Unshielded parallel cable, 10 ft. long. with alligator clips (1) at both ends

MS-561

Net .60

SPECIAL! AFAYETTE PK-168 1.25 RCA "45" REPLACEMENT







2.95

TO-284-OV-TO-222

REPLACEMENT CARTRIDGES **FOR RCA 74067**

- Replacement for cartridges in many thousands of RCA45 and many LP record changers.
- ●1 MIL SAPPHIRE STYLUS 2.3V OUTPUT HIGH IMPEDANCE CRYSTAL TAKES 7-10 GMS PRESSURE • % " MTG CENTERS

PK-168 ... Net 1.25

PS-555—Sapphire replacement stylus for PK-168

GOLDRING "500" MAGNETIC

SONOTONE 2T-S (Supersedes 9980-S) Turnover Ceramic Cartridge

TURNOVER CERAMIC Cartridge
This cortridge is used to replace Astatic AC, ACD, CAC,
GC, LOD, ELECTRO-VOICE 16TT, 33, 43, 46T 96T; SHURE
WC series from WC22 to WC36, W22, W26, WEBSTER
ELECTRIC AX, A1, A9-1. It is to be used on VM, Columbia
360, Webster, Crescent record changers and many other
types now in use. Will give such hi-fi characteristics as
extended frequency range and obsence of distortion for
beyond most cortridges it replaces — all with the added
advantages of ceramic sofety from humidity and heat. Host
Mil stylus for LP records and 3 mil for standard — hast mil stylus for LP records and 3 mil for standard - bott PK-40—In lots of 5, ea. 3.50.....Singly, ea. 3.75

HI-FI TURNOVER CARTRIDGE ● 40-14,000 CYCLES (PK-79)

40-14,000 CYCLES (PR-79)

Never before has a turnover cartridge of this quality been offered at such a price. Frequency response fram 40-14,000 cycles ± 2 dbl Has 2 sapphire styll to play all speeds and types of recards. Needle pressure reculred is only 5 grams on LP and 12-15 grams on 78 RPM. Output is .5 valts. Cames complete with turnover mechanism and knob. Fits Webster, Garrard, VM, Callaro and tone orms of other leading manufacturers of recard changers and players. This is one of the autstanding Lafayette values. PK-79-Singly, each \$2.75.....in lots of 3, each 2.50

PK-85—Sapphire STD (78) Replacement Needle.... .69

PHONO CARTRIDGES 3.5 VOLT OUTPUT (PK 11)

Guaranteed high quality exact duplicates for direct re-placement of all standard cortridges such as L70, L82, L92, W60B, N10, and many others. Pin plug connectors for all 78 cm. m. for all 78 r.p.m PK-11 each.... .1.29

3 VOLT TURNOVER CARTRIDGES

High Output: 3 volts

Turnaver Mechanism

Duol Sopphire Styli

STOCK NO.

● Excellent Frequency Response

PK-86-Sopphire LP Replocement Needle.. PK-87-Sopphire STD (78) Replacement Needle

RONETTE HI-FI CARTRIDGES IMPORTED FROM HOLLAND

Lafayette brings you this famous high fidelity cartridge for use in Callara, Webster, Garrard and VM changers. Turnover type equipped with 2 sapphire styli to play all speeds. Frequency response to 9,000 cycles, output .7 volt. Camplete with turnover mechanism and knob; will fit most tane arms of record channers and players.

PK-62 (TO-284-OV)

HIGH OUTPUT MODEL

Hos less than 1% intermodulation distortion plus high autput of 2.2 Valts. Camplete turnover with 2 sapphire styli. Popular type maunting.

PK-82 (TO-222)-In lots of 3, each 2.75; singly 2.95

TX-88 HI-FI MODEL

This new wide range high fidelity crystal turn ints new wide ronge high ndelity crystot turnover corridge has a frequency response flot from 30-24,000 cps. Output is 0.4 volts, which makes it useable without a preamp. It gives straight line response from new arthorecards and so requires no equalization. Extremely high cempliance stylus assembly just snops into place. Complete with dual styli. Shops. wt., 6 az. RONETTE TX-88

TX-88 GOLDRING "500" SONOTONE 2T-S 7.35 3.75 5.75

The same 2.75 NEW! STEREO CRYSTAL TURNOVER CARTRIDGE EXCELLENT FREQUENCY RESPONSE

HIGH OUTPUT . LOW TRACKING FORCE

O DUAL SAPPHIRE STYLI

Another instance at Lafayette special value for you: a sterea crystal turnaver cartridge of such a low price. Frequency response 40-14,000 cps. Tracks with law stylus pressure and high output voltage. Excellent channel separations for sterea effect. Supplied with turnaver mechanism, knob and dual sophite styli to play records of all speeds. Completely compatible, Fits all standard arms. Shgs. wt., 6 oz.

PK-258 Net 2.75 REPLACEMENT STYLI



ARM TAKES STEREO OR MONAURAL CAR-TRIDGES WITH WIDE RANGE MONAURAL CARTRIDGE ADJUSTABLE ARM HEIGHT AND

Arm is wired for stereo, anticipating future conversion. Has a wide range turnover monoural crystal cartridge with dual sapphire styli. Output is 1½ V. Easy height adjustment at base, 1½" to 1-9/16", Also stylus pressure adjustment. Plostic arm 9½" tang averall. Base 1½" w. with maunting hales on 1½" centers. Shelded leads. Satin smooth light moroon finish. Shpg. wt., 2 lbs.

PK-146 Not 2.75 PK-232 Pickup arm only less cartridge Net 1.25 PK-158 Sapphire LP replacement Needle PK-159 Sapphire STD replacement Needle .Net .69



TURNOVER CARTRIDGE ● DUAL SAPPHIRE CARTRIDGE ● PLAYS STEREO,

MONAURAL LP, 78's

Here is a combination of a fomaus make crystal stereo cartridge and stereo wired arm all ready for use— at an amazingly lowprize for a new stereo item. Completely compatible, this unit will play either stereo or monaural records (78's, too). Output is .4 volt per channel, response 30-14,000 cps. Min. Stylus 6-8 grams. Styli are dual sapphire type, .7 mil and 2.5 mil,

individually replaceable

PK-290 Stereo Tone arm with Turnover Stereo Cartridge....Net 6.95 RONETTE MODEL-OV

CRYSTAL TURNOVER STEREO CARTRIDGE

Another fobulous item for music lovers from Lafayette. We now bring you this outstanding cartridge so that you can enjoy the breathtaking realism af the latest stered discs. Campletely compatible, this cartridge plays either stereo or manaural records. Consists of 2 crystals to provide a .4 valt output per channel. Wide frequency response of 30 to 14000 cps. Vertical and lateral compliance of 3.5 x 10 6 cm/dyne. Crosstalk, .24db. Supplied with turnover duot sopphire tityll for micragroove records on 78 rpm records. Fits all standard tane arms. Shpg. wt., 8 oz. IREG. 12.95 SPECIALI NET 4.45



4 SPEED PHONO MOTOR WITH TURNTABLE

Quiet, dependable A-C operation assured by rubber shock-mounted friction drive motor. Speed change control through idler driving on 8" turntable. Mounting centers 4½ a 3½"; 2½" depth below base plate. Shpg. wt., 3½ lbs.

ML-24 Phono and turntoble PK-149 Mounting board far mater Net 95e

WIRELESS BROADCASTER

Play your phanograph through any radio any where in the house without connecting wires. Talk through your radio by microphone.



Lafayette's new wireless broadcaster will extend your enjoyment of your phono-player to every room that has a radio. Connect phono to wireless broadcaster, tune in any radio to the wireless broadcaster, which broadcasts on an adjustable frequency between 700KC. Pick your spot. Will take crystal or magnetic cartridges and also microphones for voice broadcast. Has volume control with "on-oft" switch, Size 4% a 5½ x 1½". Completely wired and assembled with all tubes and operating instructions. 110V AC/DC operation. Shap, wt., 4 lbs.

LA-14 Wireless broodcoster PA-24 Crystal microphone


Net 4.25

Page 17



BOGEN 33 WATT P. A. SYSTEM

104.50



This compact 33 watt P.A. System complete with sturdy portable carrying case housing 2 high quality 12" speakers each with 35 ft. cable, microphone, floor stand and desk stand is ideal for use by schools, churches, warehouses, nightclubs-indeed any high quality P.A. application, 117 V, 60 cps. AC. Shpg. wt., 58 lbs. System consists of:

1—8agen CHA 33 Amplifler.

1—Lafayette PA-24 crystal microphone with 5' shielded cable.

1—Lafayette PA-34 microphone desk stand.

1—Atlas MS-10C microphone floor stand.

2—Heavy duty 12" PA speakers.

1—Lafayette PA-51 portable PA case.

2—35' lengths speaker cable.

PA-180 80GEN CHA-33 P.A. SYSTEM AS DESCRIBED.

SPECIAL 12" & 8" P. A. SPEAKERS

• 12" FULL 15 WATTS OF POWER • 8" FULL 10 WATTS OF POWER
• HEAVY ALNICO 5 MAGNETS 12" MODEL — Fine quality throughout, these speakers were designed especially for public address work. Will handle 15 watts of power—making them ideal for use singly for medium power systems or in multiples for higher power. Rugged mechanical construction, dust-proofed and rust-resistant. Have 4.64 az. Alnica 5 magnet, 8 ahm vaice coil. Shpg. wt., 5 tbs.

Net 4.95 8" MODEL — Ideal far larger scale, lower power paging systems. Same quality as 12" speaker above, but 8" diameter, rated at 10 watts, with 3.16 oz. Alnico 5 magnet. 8 ohm voice cail. Shpp. wt., 3 lbs.

.. Net 3,95



8" MODEL = 3.95 12" MODEL - 4.95

NEW! POWER MEGAPHONE Portable Sound Broadcaster

IDEAL FOR OUTDOOR HAMFESTS

 Uses 8 Flashlight Cells
 Completely Self-Contained • Weighs only 61/2 lbs. with Batteries • High Efficiency Horn Projects Sound 1000 Ft. • Shoulder Strap for Portability and Ease of Use • Microphone Detachable On 10-Foot Cord • For Construction, Auctions, Carnivals, Fire & Police Use • Also Ideal for Marine, Railroad, Civil Defense, Sporting Events

A power megaphane with many unusual features and many applications. Basically a highly efficient sound projector horn with a built-in microphane, capable of amplifying and projecting the voice with a range of 1000 feet. The microphane is a telephone-type element, easily replaceable, and may be detached and extended up to 10 feet from the horn. The reflex-type horn is extremely light-weight, rubber-rimmed, af strong, sturdy spun aluminum construction with 2½ are column and is supplied with a strong for carrying or placing on the shoulder. A press-to-talk switch on the microphane provides for economy of power use—power is used only when actually talking. No warm-up time required—amplification is instantaneous. A patented non-linear current limiting device restricts current flow to safe levels for langest battery life. Uses 8 size "D" floshlight cells in series with an approximate life of about 10 hrs. af use. Battery having serves as base for entire assembly. Battery compartment opens easily by means of 2 thumbscrews for battery replacement. Size 17" lang overall; horn mouth is 12" diam. Shpg. wt., 8 lbs. less batteries.

PA-13—Power Megaphane, Less batteries.

PA-13 — Power Megaphone, Less batteries.....

BATTERIES FOR ABOVE-Burgess No. 2 or RCA VS036-8 Required ... Net each

.13




Self-Contained-Only 61/2 lbs. THROWS VOICE 1000 FT.









PAGING SPEAKER 90° DISPERSION

The high power handling capacity combined with maximum intelligibility make this a superior unit for paging and talk-back applications. Frequency Response 250-15,000 cps. Power capacity 30 watts. Impedance 8-ohms,90° Dispersion. Equipped with a universal maunting bracket, weather proofed, trapicalized with hermetically sealed driver unit. 9% diam. x 8-13/16" deep the speaker lends itself to use in any P.A. situation.

PA-55 90° DISPERSION PAGING SPEAKER............Net 15.75

149.95

PA-24

BOGEN 20 WATT MOBILE P. A. SYSTEM

Completely portable in every respect, the versatility of this system allows its use from any car or truck, making the system ideal for sound truck application. System consists of:

-Bogen CHA 620Y 20 watt; 6-12-117 volt

amplifier with 3 speed phono top.

2-Electrovoice 844 speakers, with built in 30 watt driver units.

1-Lafayette PA-24 crystal microphone with 5' shielded cable.

1-Lafayette PA-34 microphone desk stand. 2-35' lengths speaker cable.

Shpg. wt., of complete system 75 lbs.

PA-34

25 WATT DRIVER **EXCELLENT** FOR

ABOVE TRUMPET

MODERN SPEAKER BAFFLES

ATLAS MS-10C



Well built plywood speaker baffles for indoor public address and paging systems, intercoms, extension speakers, etc. Frieze-design grille cloth, madern walnut finish.

		SINGLY	LOTS OF 3
NO.	DESCRIPTION	EACH	EACH
58-10	For 5" or 6"	2.40	2.25
58-11	For 6"	2.75	2.55
58-13	For 10" or 12"	4.40	4.20

The most popular system for schools, RR waiting rooms, gyms, churches, noisy factories. Ideal for rentals.

ALL LAFAYETTE AMPLIFIERS ARE GUARANTEED FOR ONE FULL YEAR

PA-181 BOGEN MOBILE 20 WATT P.A. SYSTEM

24.95

LAFAYETTE MODEL PA-60 10-WATT P.A. AMPLIFIER



CHA 620Y

FEATURES: Pravides extensive coverage—up to 20,000 square feet when used with trumpet speakers. For square feet when used with trumpet speakers. For stare demonstrations, clubs, churches, offices, classrooms, outline sales, entertainment. Incorporates latest circuit features for improved performance. Separate volume controls permit mixing microphone and phono. 2 speaker output sackets. Cabinet is finished in baked

hammerloid enamel,

SPECIFICATIONS: TUBES: 12AX7, 616GB; 6X5GT
(Rectifier). PEAK POWER: 12 Worts. INPUT GAIN:
Microphane 105 db 2.2 Meg., Phono 65 db 1/s Meg.
FREQUENCY RESPONSE: 70 to 10,000 cps ± 2 db.
TONE CONTROL ATTENUATION: Treble 15 db at
10,000 cps. CONTROLS: 4; mike Power Phono or
Radio, Tone, INPUTS: 2; 1-Microphane and 1-Phono.
OUTPUT IMPEDANCES: 4, 8, 16 ohms and 70 volts
(500 ohms). HUM AND NOISE: 60 db below maximum output. POWER CONSUMPTION: 70 Worts,
110/120 V.A.C. 60 cps. SIZE: 101/2" w x 51/3" d x
6" h, SHIPPING WEIGHT: 121/3 lbs.
LAFAYETTE MODEL PA-60—Camplete with

LAFAYETTE MODEL PA-60—Complete with Tubes Net 24.95

LAFAYETTE MODEL PA-62 30-WATT P.A. AMPLIFIER

Net 149.95

PA-62 49.50



FEATURES: Ideal for use in churches, schools, small theoters, lecture halls and industrial plants. Priced extremely low to give extra profits to rentals and soles. Separate bass and treble tone controls, permits adjustments to meet all acoustic requirements. Two mike inputs; optional 4-speed phono top. 70 volt constant voltage output top. Provides coverage up to 100,000 squore feet when used with trumpet type speakers. Chassis is equipped with 2-speaker plug-in autput sackets. Unit is housed in sturdy steel, well-ventilated tabinet. Modern streamlined styling. Finished in baked hammerloid enamel. Remavable escutcheon plate for rack and ponel mounting.

SPECIFICATIONS: TUBES: 3.12AX7, 2-6L6GB, 5Y3GY (Rectifier). POWER OUTPUT: 30 valis. IN-PUT GAIN: Microphone 125 db 3.3 Meg., Phono 82 db 1/2 Meg. FREQUENCY RESPONSE: 30 to 15,000 cps, 2 db. TONE CONTROLS: Bass + 15 db or 50 cps; Ireble + 15 db or 10,000 HUM LEVEL: 70 db below roled output. INPUTS: 3; 2-Microphone and 1-Phono. CONTROLS: 6; Microphone-1, Microphone-2, on-off, Bass, Trable, Phono. OUTPUT IMPEDANCES: 4 8, 16, and 250 ohms; 70 volts. POWER CONSUMPTION: 135 wolts, 110/120 v.A.C. 50-80 cycles. SIZE: 14" w x 8" d x 6" h. SHIPPING WEIGHT: 20 lbs.

LAFAYETTE MODEL PA-62—Complete with Net 149.50

4-SPEED PHONO TOP

For above amplifier. Fits in place of cover. Plays all speeds—16½, 33½, 45 and 78 rpm. Has constant 4-speed motor, with turnover cartridge, complete with two precious metal needles. Has arm-rest and plug connection; for 110 Volt 60 cycle. Shpg. wt., 10 lbs.

... Net 16.95 PA-65-4-Speed Phono Top.....

PA-29 E-V 727

10-WATT FIXED P.A. SYSTEMS • COMPLETE PERMANENT SYSTEM · CHOICE OF CRYSTAL OR DYNAMIC MIKE

· AMPLIFIER HAS LAFAYETTE'S MONEY-BACK GUARANTEE

High quality, law cast system engineered for smaller permanent installations. For areas up to 5500 sq. ft. For office, store, garage, small factory paging and music systems. THE COMPLETE SYSTEMS INCLUDE: The new Lafayette Model PA-60 10-watt amplifier complete; your choice of either the Electro-Vaice 727 crystal microphane complete with detachable desk stand and 5' cable — or the new Lafayette Model PA-20 weatherproaf, blast-proaf slim dynamic mike complete with high ar low impedance selector switch and detachable swivel-type stand adaptor; 8" heavy duty PM speaker; 35" speaker cable and plus; and ottractive polished walnut speaker wall boffle. For 110-120 valts, 60 cps AC aperation, Shgs. wt., 25 lbs. (Any other microphane may be substituted in all systems at additiona microphones in index LAFAYETTE PA-140 Complete 10-watt Permanent System as described with E-

727 Crystal Microphone Net
LAFAYETTE PA-141 Same as above, with Lafayette PA-29 dual impeda





· CHOICE

DYNAMIC

AS LOW AS 105.00 ONLY 10.50 DOWN

· CHOICE OF DELUXE DYNAMIC MIKES

● TWO GE 25-WATT SPEAKERS ● MONEY-BACK GUARANTEE The 30-watt system is one of our most popular models. Large enough for the majority of sound system applications — used in thousands of school auditoriums,

The 30-watt system is one of our most popular models. Large enough for the majority of sound system applications — used in thousands of school auditariums, churches, theatres, dance halls, dance studios and lecture halls. The ideal system for rentals; these systems have been sold to many hundreds of dealers.

AND REMEMBER OUR MONEY-BACK GUARANTEE AND OUR LOW, LOW PRICEI OUAL SPEAKER 30-WATT PORTABLE SYSTEMS INCLUDE: The outstanding feature-filled Lafayette Madel PA-62 30-watt amplifier; 2—GE 25-want PM speakers; 2—35' speaker cables and plugs; your choice of the popular Arganne AR-3 All-Purpose Dynamic dual-impedance microphane for hand-held, desk stand or floor stand use, with remavable ball-jaint desk stand and floor stand adapter and 8' cable; or the deluxa dual-impedance Electro-Voice 664 Cardiold dynamic for class-tolking use where high-feedback problems exist, with 40-15,000 cps respanse, an-off switch and 18' cable; the famous Allas MS-10C floor mike stand, and the handsomely designed split-type partable carrying case covered in high quality dark blue leatherette. Size of case 22½ fix x 16½ fix x 15½ m provides a secure place for the system camponents. For 110-130 volts, 60 cps AC operation. Shop, wr., 75 lbs.

LAFAYETTE PA-142 30-want Partable System, floor stand, camplete os described with Arganne
LAFAYETTE PA-143 Some as above, with E-V 664 dynamic microphane and MS-10C floor mike stand.

LAFAYETTE PA-144 Some as above, with E-V 664 dynamic microphane and MS-10C floor mike stand.

LAFAYETTE PA-144 Some as above, with E-V 664 dynamic microphane and MS-10C floor mike stand.

LAFAYETTE PA-144 Same as PA-142 with 4-speed phana tap... LAFAYETTE PA-145 Same as PA-143 with 4-speed phana tap...

MICROPHONES Fine Quality Save from 50% to 75% !!!

HIGH QUALITY TOP NOTCH CRYSTAL MICROPHONE

COMPARE IT WITH ANY MIKE AT 2 TO 3 TIMES THE PRICE

3.95 each in lets of 3

singly, ea. 4.25

Latayette mates history with a high quality CRYSTAL MICROPHOME at a price that is 60%, less than any comparable Crystal Microphone on the market today. Escaliant for PA systems, home recorders and general epictations, irraquency response 30 to 10,000 cycles, Output level—52 db. provides ample output for use with jow gein amplifiers. Uses quality moisture seeled crystal; low gein amplifiers. Uses quality moisture seeled crystal; low gein amplifiers. Uses quality moisture seeled crystal; low call the cast case in rich green behad enamel finish, with Chrome grill. Completely equipped with 5 feet of chrome grill of chr

PA-24-in lots of 3, each.



- . DUAL CRYSTAL CAR-TRIDGES
- . ALL DIRECTIONAL
- . FINE QUALITY
- . HIGH OUTPUT



Here Is a microphone with a 360° pickup, and the added power and sensitivity of two individually shock mounted and phased crystal carridges. This arrangement assures you of maximum pickup from all sides. Swivel mounted to give fuller flexibility. Case is chrome plated. Standard *5/a*-27 thread. Overall size 7" H x 3" W complete with 4 ft, cable. Shpg. wt. 4 lbs.

... Nat 5.75



A new, attractively styled crystal micraphane for all general applications such as public address and home recording—at a history making law pricel Frequency response 30-10,000 cycles. Output level—32 db. Titting head, attractive plastic case. Can be used an any stand with ½"-27 thread. Completely equipped with 5 ft. plastic covered shielded cable. Grill diam. 2½", depth 3½" height 4". Shop, wt., 2 lbs. One of the best buys in the country! PA-42.

stringed instruments such as guitars, banjas, monalins, cellas, ukeleles, etc. Provides rich, natural reproduction of the actual tane with sufficient amplification of single in a large holk. The clamp bar on the mike slides directly under the sounding board cutout to give a secure fit. Cames equipped with 8 ft, coble for connection to public oddress amplifiers, tope recarders or radios. Frequency response 40.9,000 cps. High impedance. Size: 11/2" L, 15/16" D. Shop. wt., 12 ass.

VALUE 49.50

NEW

CONTACT

MICROPHONE





A slim crystal microphone far desk top er hand-held use that is uniquely designed for universal application, smartly styled and attractively finished. Changes in temperature and humidity do not affect its efficiency, nor does increasing the coble length increase noise or change frequency characteristics. Ingeniaus swivel mounting permits harizontal and vertical rotation far most convenient angle at use. Microphone easily removed from base for holding in hand. Microphone, base, grill and all fittings are chrame finished. Has a wide range smooth frequency cresponse and an anni-directional polar pattern. Built-in locking type an-aff slide switch. Microphone is anly 5" long a 1" max, dia. Shpg. wt., 2 lbs.

PA-45-Microphane Complete with Stand.....Net 3.95

NEW "DYNA-SLIM" MICROPHONE

- HIGH IMPEDANCE SD,000 OHMS ON-OFF SWITCH
- "QUICK-SLIP" ADAPTER

Net 6.95



- . SAVE STEPS AND EXTRA PERSONNEL BY LOCALLY CONTROLLING THE VOLUME OF A REMOTE AMPLIFIER
- . EASILY REPLACEABLE MICROPHONE CARTRIDGE AND VOLUME CONTROL

A high quality crystal microphone for use with P.A. sys-A high quality crystal microphone for use with P.A. systems recorders and other applications. Permits fingering control of the valume of a remately located amplifier. This is a full size attractive unit with real eye appeal to complement its excellent performance—and at about ane-third of the price of camporable microphones. The microphone has a frequency response of 30-10,000 cycles and output level of 52 db. Comes with 5 ft. shielded cable. Has ½-27 thread fitting for mike stand. Anadsome black high-impact resistance plastic case with chromed grill. Size 2½" H x 4" D x 2½" grill diameter. Shapp. wt., 2 lbs.

PA-44 Microphone.

Net 3.95

NEW!

DUAL IMPEDANCE

SLIM DYNAMIC

MICROPHONE

RUGGEDLY CONSTRUCTED

Beautiful, professionat-looking dynemic with solidly-cost, topered, slim case with solin-chrome finish. Heavy duty slide-type on-off switch, Built-in transformer supplies dual unbal-anced impedances—low Z is 600 ohms, high Z is 50,000 Ohms. Swivel mount fits all standard ½".27 threaded stands. Blast filter eliminates unpleasant "bops" with voice use. Omnidirectional when used vertically—cardioid pattern when tilted. Engineering design and finish are of the highest quality, making this microphone excellent for any application. Complete with 5 ft. plug-in coble. Shop. wt., 2½ lbs.

• ON-OFF SWITCH • 400 & 50,000 OHM IMPEDANCES SE-

LECTED BY SIMPLE BOTATION OF PLUG

LAPEL MICROPHONE

• Full - 55 db. OUTPUT LEVEL! IDEAL GENERAL PURPOSE MIKE

Ideal general purpose mike. Specially engineered crystal Microphone. Attaches to lapel. Only 1½" in diameter. Exceptional frequency response. Output level —55 db. Chrame plated case and clip for ottaching to lapet. Includes 5 ft. of shielded cable. Shop. wt. 1 ib.

PA-9

Net 1.95

"WRIST WATCH" CRYSTAL **MICROPHONE**

- SENSITIVE
- . HIGH OUTPUT
- . PERFECT FOR SECRET PICKUPS
- . APPEARS & IS WORN EXACTLY LIKE A REAL



PA-47-"Wrist-Watch" Crystal Mike.



NEW! CRYSTAL THROAT MICROPHONE

MIGH SENSITIVITY—HIGH OUTPUT OF OR USE WITH ANY AMPLIFIER OR TRANSMITTER WITH CRYSAL MIKE INPUT O IDEAL FOR AIRCRAFT, AMATEUR, INDUSTRIAL COMMUNICATIONS, AUCTIONS, PITCHMEN, CARNIYALS, SALESMEN OF COMPLETE WITH NECKSTRAP—LEAVES HANDS FREE!

FREE!

A crystal throat microphone with a myriad of uses! Its high sensitivity and high output permits its use with any standard high impedance crystal microphone input. Its relativety wide frequency range provides a high degree of intelligibility for vaice in public address or communications work. Requires no special power supply as do carbon-type throat mikes. Complete with flexible neckband and flexible 5½° cable (less cannectar). Shpg. wt., 16. Ith

SLIM DYNAMIC MICROPHONE

- . DUAL IMPEDANCE 50,000 AND 250 OHMS
- HIGH OUTPUT 50-11,000 CYCLES
- USE ON STAND OR AS

The latest design in slim type microphanes. A high-autput dynamic mike of exceptional quality. Has very smooth response from 50-11,000 cy. cless. Built-in external switch gives you choice of either high impedance [50,000 ohms) or low impedance [250,000 ohms). Omni-directional filtoble head. This bracket is inard 3/6" -27-thread for use an stand. This bracket is instantly removable sb mike can be handheld. Has cost stantly removable sb mike can be handheld. Has cost stantly removable sb mike can be autically carrect case with satin-chrame finish and acoustically carred diom. barrel. Shpg. wt., 2 lbs.

PA-29 In lates of 3, Each

9.25

In lots of 3, Each 9.25 Single, Each

NEW DYNAMIC MICROPHONE FOR DESK-TOP, HAND HELD, OR LAVALIER USE



PA-48—Shipping wt., 2 lbs

ARGONNE ALL-PURPOSE DYNAMIC MICROPHONE . DUAL IMPEDANCE-250 & SO,000 OHMS

. USABLE RESPONSE SO-18,000 CPS

. FOR HAND-HELD, DESK OR FLOOR STAND USE

IDEAL FOR TAPE RECORDING.

PAGING, COMMUNICATIONS

PAGING, COMMUNICATIONS

Here is a flexible dynamic microphane with characteristics suitable for almost any application.
Ruggedly constructed, with topered cast-metal budy and removable base for desk use. Mounts to the base by means of a 300°-swivel adjustable ball joint and fitted with an adapter for standard 3/m-27 floar stand. SPECIFICATIONS: FRE-QUENCY RESPONSE—Practically flat 80-10,000 cps; ± 5 db 70-13,000 cps. OUTPUT—70 db below 1 valt/microbar at 1,000 cps. DUAL IM-PEDANCE: Low (750 ahms), High (50,000 ahms) unbolanced. Size 9" high (with base), 2" dlam, at head, tapering dawn to 3/4". Base diam. 4-13/16", 13/4" high. Shop. wt., 6 lbs.



ASTATIC M-150 RECORDER MIKE

- AMAZING PERFORMANCE AT
- AN AMAZINGLY LOW PRICE IDEAL REPLACEMENT MIKE

FOR TAPE RECORDERS

A new high quality crystal microphone especially engineered for recorder use. Hos a frequency response of 30-10,000 cps and an autput level of —44 db. Housed in compact, lightweight, conveniently-held high-limpact ivory plastic case having gold, rigidized metal grille. Comes with 5 ft. extra flexible, single conductor shielded cable.

2-3/16" x 2"4". ASTATIC M-150 RECORDER MIKE ...



HARMONICA CONTACT MICROPHONE

This is a fine audity, sensitive, crystal contact microphane with a high output that is especially designed to fift harmonicas. When the relatively weak sound of a hormonica is amplified, the results are astanishing. The microphane may be cannected to any P. A. system, the advalue section of a phonograph, or radio. Installation screw on the boss end of the harmonica and the leads measures anly 1½ L x ½ W x x y D. Complete with 7 ft. shielded cable.

...Net 1.49

SPECIAL afayette **VALUES!**

MIKE STAND

Economical desk stand. Chrame plated; heavy cast base finished in gray wrinkle. 4½" diam., 7" h. Felt pod; ¾" —27 thread; adjustable callar. Shpg. wt., 2





Standard single contact, card maunted, nickel plated brass, knurl grips, %"-27 thread.

MS-467 Female connector

224



A sturdily constructed case for amplifier and two 12" speakers, Made of heavy plywood with reinforced metal corners. Case splits Into 2 baffles, each with leather carrying handles. Strong wire mesh grilles covered with attractive cloth. Has Z haaks in each half for carrying speaker cables and provision for mike and mike base. 4 snop lacks, inside dimensions 20½ h, 15-9/14w, 14½ d. Covered in Jork blue washable leatheretre. Shpg. wt., 20 lbs.

STUDIO DYNAMIC MICROPHONE



IDEAL FOR HOME, OFFICE OR STUDIO

USE

• FREQUENCY RESPONSE—50 11,000 cps.

HIGH IMPEDANCE-50,000 OHMS. HIGH OUTPUT


A revelation in microphane value, this high quality amnidirectional dynamic microphane provides features found in microphanes selling for many times the price. Employing a unique swirl ridged aluminum diaphragm completely sealed and gasketed against high humidity and temperoture conditions, the PA proves itself ideal for a wide variety of applications, such as tape recording, church, charal fraups and theatrical use. The 360's stirruped shaped bracket provides for mounting with any %"-27 thread floor, desk stand or baom mount. Finished in an attractive gunmetal grey the microphane is supplied with 41/5's shielded cable. Shaps. wt., 1, 1b.
PA-49 STUDIO DYNAMIC MICROPHONE......Net 11.95

LAFAYETTE'S MICROSCOPES ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38



Wette Sensational! STEREO

NEW! GENERAL ELECTRIC VR-22 STEREOPHONIC MAGNETIC VARIABLE RELUCTANCE HIGH FIDELITY CARTRIDGES



- FREQUENCY RESPONSE 20-17,000 cps
- UP TO 30 DB CHAN-**NEL SEPARATION**
- VIRTUALLY **HUM-FREE**
- HIGH COMPLIANCE

MODEL VR-277 with .7 mil diamond stylus. Absalutely the finest of all G.E. cortridges. Combining new design and manufacturing techniques with proven variable reluctance excellence, this cartridge is made witually hum-free by mu-metal shielding on top, entire front and coil assembly. Harmanic and intermodulation distortion are effectively minimized by a lack of resonant peaks in the audio range, and an essentially linear flux field. Precise tracking and optimum compliance are assured by new stylus and armature suspension system. The stylus is easily changed without the need for special tools. Output is closely balanced over entire frequency range (one db at 1000) cycles) for equal saund volume from both channels. A ground strap allows use of this cartridge with either 3-or-4-wire stereo systems; the cartridge shield may be grounded individually by a separate wire. SPECIFICATIONS: FREQUENCY RESPONSE: 20-17,000 cps; OUTPUT: 6 mv, per channel at stylus velocity of 5.5 cm/sect INDUCTANCE: 420 mh, per channel; CHANNEL SEPARATION: up to 30 DB; LATERAL COMPLIANCE: 3 x 10° cm/dyne; VERTICAL COMPLIANCE: 2 x 10° cm/dyne; RECOMMENDED LOAD, EACH CHANNEL 47,000 ahms; RECOMMENDED TRACKING FORCE: 5 to 7 gms: SHPG. WT., 6 az.

GE 28-WATT MATCHED STEREO PHONO SYSTEM



139.95 GE MS-2000 28-WATT AMPLIFIER NEW COLLARO TSC-740 WITH SHIELDED MOTOR 41.65

(Less Bose)
NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
2-ELECTRO-VOICE SP12B
34.30 12" SPEAKER @ 34.30

MF-589 Complete stereo system as listed obove. Shpg. wti, 59 lbs. Net 219.73

Recommended enclosures for MF. 589 system ore the CAB 16 Series Resonator Enclosure or

Resonator Enclosure or
Lofoyette Eliptoflex Series Bookshelf Enclosure. Set of 2 57.50
(Pleose specify finish).
HF-590 Same as HF-589, but with 2 Lofoyette—SK-125 3-Way Ducted Port Specker Systems. Shap. wt. 64 lbs.
PK-111—Bose cut for Collaro IC-740. Specify mohagam. blande or wolnut finish.

FISHER TA-600

Regular Catalog Price 274.65 LAFAYETTE SYSTEM PRICE

24.45

You Save 54.92

14.00 Monthly

William

AFAYETTE

SERIES BOOKSHELF ENCLOSURE

HARMAN-KARDON A220 20-WATT STEREO HI-FI PHONO SYSTEM

79.95 COLLARO TSC-740 WITH COMPLETELY SHIELDED MOTOR 41.65 NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 2- LAFAYETTE SK-124 BOOKSHELF SPEAKER SYSTEMS @ 17.50 35.00

Regular Catalog Price 181.05

LAFAYETTE SYSTEM PRICE

139.95

You Save 41.10

14.00 Down 10.00 Monthly

MF-591 Complete stereo system as listed above. Shpg. wt., 62 lbs. Net 139.95
MF-592 Some as MF-591, but with 2-Lafayette Famous Free Edge 5K-58 12" Coaxial speakers and 2 CAB-16 Series Resonator Enclosures. Shpg. wt., 132 lbs. Net 179.04
MF-593 Same as HF-591, but with 2-Lafayette Famous Free Edge 5K-58 12" Cooxial speakers and 2-Lafayette Eliptoflex Series Bookshelf Enclosures. Shpg. wt., 104 lbs. Net 179.04
PK111 Bose cut for Collora TSC-740 Specify mohogany, blande or walnut finish. Net 3.95

AFAVETTE SK-124

BOOKSHELF

SPEAKER SYSTEMS

● SELECT YOUR OWN CARTRIDGE ●
You may substitute the Shure M7D, Pickering 371.7D or the new
Electro-Voice 31MD7 in any system shown with the GE VR-22 at no additional cast. The Shure M3D may be substituted at an additional cast of \$24.00

SCOTT 24 WATT STEREO PHONO SYSTEM



SCOTT 222 STEREO AMPLIFIER (Less Case) GARRARD RC-121/II STEREO CHANGER NEW GE VR-22 (.7 MIL)

DIAMOND STEREO CARTRIDGE 2 STEPHENS 80 FR 8" SPEAKERS @ 33.50

Regular Catalog Price 273.05 LAFAYETTE

SYSTEM PRICE

PRICE

MF-575 Complete stereo system as listed obove. Shpg. wt., 51 lbs.

MF-576 Same as MF-575 but with 2-Lafayette Famous Free Edge SK.
58 12" Coaxiol speakers and 2 Lofayette Eliptoflex Series Bookshelf Enclosure. Shpg. wt., 108 lbs.

PK-111 Wood Bose cut for RC-121 specify mohagony, blande or walnut finish.

Net 204.95

Scott D Case for Scott 222 Amp.

Net 9.95

You Save 54.60 21.84


139.95

41.65

24.45

Down 14.00 Monthly

COMPLETE FISHER STEREO PHONO SYSTEM



(Less Cobinet)
GARRARD RC-88 DELUXE CHANGER
NEW G.E. VR-22 (.7 MIL) DIAMOND STEREO
CARTRIDGE 58.31 24.45

143.08 Regular Catalog Price 575.34 You Save LAFAYETTE SYSTEM PRICE

115.06 46.02 Down 27.00 Menthly 460.28

MF-571 Complete system os listed above, Shpp, wt., 74 lbs. Net 460,28 wt., 74 lbs. Net 460
Recommended enclosures for obove system of CAB-16 Series Resonator Enclosure or Lofayette Eliptoflex Series Baakshelf Enclosure (Please specify finish.)
Set of 2 57

MF-572 Some as HF-571, but with 2 SK-114 12" 3-way speakers with 6% lb. magnets and 2 Lafay-ette Eliptoflex Series speaker enclosures, please specify finish] Shpg. wt., 170 lbs. .Net \$45.54

PK-111 Wood base cut for RC88, specify mo-hodeny, blands or walnut finish. Net 3.95



HARMAN-KARDON A-250 50-WATT

STEREO HI-FI PHONO SYSTEM
H-K A250 STEREO AMPLIFIER (Less Cage)
GLASSER-STEERS G5-77 (Less Base)
NEW GE VR-22 (.7 MILL) DIAMOND STEREO
CARTRIDGE
2 UNIVERSITY 312 SPEAKERS @ 71.54
2-LAFAYETTE ELIPTOFLEX SERIES
BOOKSHEIF ENCLOSURES @ 22.50 59.50 24.45 143.08

BOOKSHELF ENCLOSURES @32.50 65.00

Regular Catalog Price 471.98 LAFAYETTE SYSTEM PRICE

377.60

21.00 You Save 94.38

CAB-16 Series Resonator Enclosure may be substituted in MF-581 system at no additional cost.

DIAMOND

STEREO CARTRIDGE

PILOT 240 30-WATT STEREO HI-FI PHONO SYSTEM PILOT 240 30 WATT STEREO AMPLIFIER 129.50 GARKARD RC/121/11 CHANGER (Less Base) 41.65 NEW GE VR-22 (.7 MIL) DIAMOND STEREO

CARTRIDGE 2-ELECTRO-VOICE SP12B 12" SPEAKERS@ 34.50

You Save

52.84 LAFAYETTE SYSTEM PRICE 211.36 SYSTEM 21.13 Down

14.00 Monthly
HF-573 Complete stereo system as listed above. Shpg.
wt., 60 lbs.Net 211.36 Recommended enclosures for HF-570 system are the: CA8-16 Series Resonator Enclos-

Lafoyette Eliptoflex Series Bookshelf Enclosure. (Please specify finish). Set of 2 57.50 HF-574 Some as HF-573,



GENERAL ELECTRIC DELUXE 40-WATT STEREO PHONO MUSIC SYSTEM

GE MS-4000 40-WATT STEREO AMPLIFIER
GARRARD RC-88 STEREO CHANGER (Less Base)
NEW GE VR-22 (.7 MILIDIAMOND STEREO CARTRIDGE
23-JENSEN TR-10 TRI-ETTE SPEAKER SYSTEMS @114.50
Regular Catalog Price
MF-577 Complete GE Regular Catalog Price HF-577 Complete GE
phono system. Choice of
GE 4000 Amp. Grey and
Silver ar GE 4010 Amp.
Brown and Gold, (please
specify). Shpg. wt., 123
lbs. Net 393.37

Ibs. Net 393.37
HF-578 Same as HF-579
but with 2-Lafayette SK112 12" 3-Way speakers
with 3't ib. magnets and
2 Lafayette Eliptoflex Series Bookshelf Enclosures.
Shpg. wt., 132 ibs.
Net 389.64

PK-111 Wood base cut for RC 88 specify mahogany, blonde or walnut finish. Net 3.95

LAFAYETTE SYSTEM

393.37 You Save 98.34

39.33 Down 24.00 Monthly

119.95

41.65

24.45 69.58







BOGEN DB230A STEREO AMPLIFIER (Less Cabinet)
GLASSER-STEERS GS-77 STEREO CHANGER GLASSER-SIEERS GS-77 SIEREO GLATION (Less Bose)
NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
DIAMOND STEREO CARTRIDGE
2-UNIVERSITY 312 SPEAKERS @ 71.54 143.08

- 40

2-UNIVERSITY 312 SPEAKERS @ 71.54 143.08

HF-585 Complete stereo system os listed above. Shpa. wt., 74

lbs. Well and Shpa. wt., 74

Bagen CEG cabinet with legs for DB230 Net 8.00

New GE VR-22

DIAMOND

CARTRIDGE

STEREO

BOGEN 24-WATT STEREO PHONO SYSTEM

BOGEN DB212 24 WATT STEREO AMPLIFIER (Less Cabinet) GARRARD EC121/II STEREO CHANGER (Less Bose) NEW GE VE-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 2-UNIVERSITY UXC 122 @ 34.79

LAFATETTE CAB-16 SERIES

Regular Catalog Price 255.63

LAFAYETTE SYSTEM PRICE

You Save 51.12

20.45 Down 14.00 Monthly

HF-568 Complete Bogen system as listed above. Shpg. wt., 61 lbs. Net 204.51 HF-569 Some os HF-568 but with 2-Lafayette SK-58 12" Coaxial speakers and 2-CAB-16 Series Resonator Enclosures. Shpg. wt., 137 lbs. Net 244.50 HF-570 Some os HF-568 but with 2-Lafayette SK-58 12" Cooxial speakers and 2-Lafayette Eliptoflex Series Bookshelf Enclosures. Shpg. wt., 121 lbs. Net 249.50 PK-111 Wood Base cut for RC-121, specify finish in mahagany,

121, specify finish in mahagany, blande or walnut, Shpg. wt., 5 lbs. Net 3.95

Bogen BEG cobinet with legs for DB212Net 7.50

SELECT YOUR OWN CARTRIDGE .

RESONATOR ENCLOSURES

You may substitute the Shure M7D, Pickering 371.7D or the new Electra-Vaice 31MD7 in any system shown with the GE VR-22 at no additional cast. The Shure M3D may be substituted at an additional cos of \$24.00

PILOT SM-245A 40 WATT STEREO HI-FI PHONO SYSTEM



PILOT SM-245A 40 WATT STEREO AMPLIFIER GLASSER-STEERS GS-77 STEREO CHANGER 199.50

(Less Base) NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE
2-ELECTRO VOICE 12TRXB
12" SPEAKERS @ 61.68

12" SPEAKERS @ 61.68
HF-5.79 Complete stereo system
as listed above. Shpg. wt., 71
lbs. Net 330.35
Recommended enclosures for HF579 system are the CAB-16 Series
Resonator Enclosure.
Lofayethe Eliptoflex Series Book.
shelf Enclosure. Set of 2 57.50
(Pleose specify finish).

LAFAYETT

ELIPTOFLEX SERIES

BOOKSHELF ENCLOSURES

HF-580 Some as HF-579 but with 2-Lafayette Famous Free Edge SK-58 12" (Coaxial speakers and 2 Lafayette Eliptaflex Series Bookshelf Enclosures, Shop wt., Net 329.00

Net 329.00

33.03 Down Model GSB Woodbase for GS-77 in ebony with satin brass trim, or unfinished. Net 9.60

24.45

129.36 Regular Catalog Price 412.81

LAFAYETTE SYSTEM PRICE

14.00 Monthly

SCOTT 40 WATT STEREO PHONO SYSTEM
SCOTT 299 40 WATT STEREO AMPLIFIER
(Less Cage)
GLASSER-STEERS GS-77 SIEREO CHANGER
199.95

59.50

24.45

(Less Base) NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 2-UNIVERSITY 312 12" TRIAXIAL

SPEAKERS @ 71.54 Ragular Catalog Price 426.98 LAFAYETTE SYSTEM PRICE

Down 21.00 You Save 85.38 Monthly

HF-587 Complete stereo system as listed above. Shop. wt., 70 lbs. Net 341.60 Recommendee enclosures for above system are the CAB 16 Series Resonator Enclosure or Ladquette Elitatoflex Series Bookshelf Enclosure. (Please specify finish).

HF-588 Same as HF-587, but with 2-Lafayette
SK112 12" 3-Way speakers with 3½ ib magnets
and 2 Lafayette Eliptofter Series Bookshelf Enclosure. Shpg. wt., 147 lbs. Net 406.50
Model GSB Woodbase for GS-77 in ebony with
so Scott C cage for Scott 299 Amplifier Net 9.95

0000000 New GE VR-2: (.7 MIL) DIAMOND STEREO CARTRIDGE LAFAYETTE ELIPTOFLEX SERIES BOOKSHELF ENCLOSURE

COMPLETE HARMAN-KARDON

STEREO SYSTEM


H-K TA230 STEREO FESTIVAL (Less Cage)
GLASSER-STEERS GS-77 (Less Base)
NEW GE VR-22 (.7 MIL) DIAMOND STEREO
CARTRIDGE
2-ELECTRO-VOICE 12TRXB 12"SPEAKERS@62.68 259.95

24.45
Regular Catalog Price 469.26
SYSTEM PRICE 37.5
Down 21.00 You Save 93.84

Monthly CAB 16 Series Resonator Enclosure or Lafayette Eliptoflex Series Bookshelf Enclos (Please specify finish).

HF-584 Same as HF-583, but with 2-Lafayette 5K-112 12"3-Way speakers with 3½ lb. magnets and 2 Lafayette Eliptoflex Series Bookshelf Enclosures. Shpg. wt., 103 lbs. Net 454.50

AC 30 Copper and Black metal enclasure for HK-TA230 Not 12.95 MK-TA230
WW 30 Walnut or FW 30 Fruitwood hord wood enclosure. MK-TA230
Net 29.95
Model GSB Woodbase for GS-77 in ebony with satin bross trim, or unfinished.
Net 9.60

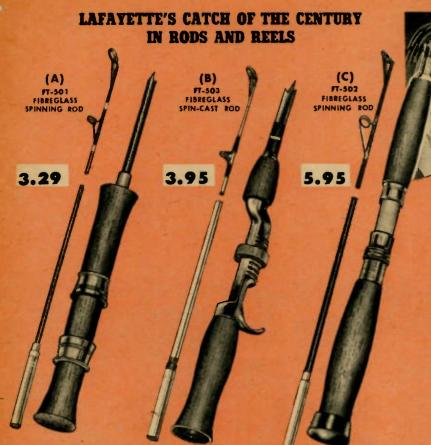

AFAYETTES DIRECT

(A) SPECAL TUBULAR FIBREGLASS SPINNING ROD

• GENUINE TUBULAR SUPER GLASS ROD • STANDS ROUGHEST ACTION-NEEDS MINIMUM CARE • SOLID-COMFORTABLE-NATURAL CORK GRIP • SINGLE WIRE NON-FOULING GUIDES

A first quality tubular (hollow) fibreglass spinning rod—plenty of power, action and eye appeal. All the features of rods selling far above Lefayette's price. Solid-comfortable-natural cork handle with anodized aluminum recl retaining rings. Holds reel solidly and securely. Extra large guides with neat, even nylon wrapping. Sealed against moisture. Lang, strong extra deep joining ferrule precisely filted. Guides are hard-rust resistant—and properly spaced. Braced tip-top guide. Entire rod finished in hord, durable, black lacquer. Popular 2 piece, 5 foot length. Shpg., wt., 1½ lbs.

FT-SD1 FIBREGLASS SPINNING ROD.

Net 3.29

(B) TUBULAR FIBREGLASS SPIN-CAST ROD

• 51/2 FT. MEDIUM-LIGHT ACTION • POSITIVE LOCK REEL SEAT

Finest 2 piece, hollow fibreglass, medium-light action spin cast rod. Five inch web, shaped cork grip on a die cast aluminum offset handle. Positive, threaded ring, locking reel seat. Designed for closed face spin cast reelst Chrome plated, stainless steel guides and braced, offset tip-top. Chromed, stainless butplate. Extra deep, precisely fitted ferrules. Colorful, sealed, nylon wrappings. Fine action with plenty of back bone. Casts flies, streamers, bugs and poppers. Shpg. wt., 1½ lbs.

FT-503 FIBREGLASS SPIN-CAST ROD

(C) TUBULAR FIBREGLASS "7 SEAS" SPINNING ROD

. FOR FRESH AND SALT WATER SPINNING! . ACTUAL WEIGHT ONLY S DZS.! . COMPARE TO RODS SELLING FOR TWICE AS MUCH

All the extra power you need to land the "big anes"—in fresh or salt water. Hollow glass construction for that "live" action—plus "back-bane" when you need it. 4" cork fore grips 6\%" cork butt with vinyl butt plate. Extra-large, non-fouling, diamand-hard guide. "Snake" design allows guides to flex with rod. Braced lip top of super-hardened, stoinless steel. Fixed reel seat polished brass with chrome retaining coltar and lock nut. Glossy black lacquered finish. Colarful, sealed nylon windings.2 piece blade with extra deep ferrules. Overall length 6\% ft. Superbly topered—designed for maximum lure action-trouble free construction. Shpg. wt., 1 lb. FT-502 FIBREGLASS SPINNING ROD.

2.95 (E) 16 PUSH BUTTON N CAST REEL (D) FT-512 SPINNING REEL 6.95 PT-515 "7 SEAS" TROLLING REEL 7.95

(D) SPECIAL SPINNING REEL

• GOLD ANODIZED SPOOL • NYLON BEVEL GEAR • ANTI-REVERSE LOCK

A fine, light spinning reel with all the features found in far more expensive reels. Strang-sturdy hondsome appearance. Selective antireverse lack. Chrome ploted pickup arm. Body of non-corroding, ebony finished, aluminum allay. Hausing and spool of gold anodized aluminum for maximum corrosion resistance. Naiseless, smooth running, nylon bevel gear. Handle is removable for storage.

Holds 200 yds. of 4 lb. test line. Gear ratio of 3 to 1. Shpg. wt., 1 lb

FT-S12 SPINNING REEL

Net 2.95

(E) PUSH BUTTON SPIN CAST REEL

Closed face—back lash free—push button action. Push button spring release—assures instantaneous line control the moment the lure hits water. Brass Gears—precision mochined to assure lang, trouble-free service. Finger-tip Anti-Reverse Lever—far fast action. Spring Loaded Geared Drag Adjustment—may be set for any tension. Attractively finished in triple locquered ebony with gold-anodized spool cover. Chrame plated double hondle cronk. Incorporates the features and trouble-free performance of the most expensive reets. Complete with 80 yds. of 6 lb.,limp monofilament line and rubber proctice plug. Actual weight only 8½ ass. Shpg. wt., 1 lb. FT-516 PUSH BUTTON SPIN CAST REEL.

Net 4.59

(F) NEW! "SPIN-TACULAR" REEL

Finest-fastest imported spin reel. Ultra smooth recovery, ratio about 4 to 1, fulf bail, stainless pickup. Positive, smooth drag with click built into spool, Friction free line guide of diamond-hord tungsten carbide. Positive anti-reverse clutch — no manual holding when playing, netting or trailing. Metal reel with two interchangeable spools. Capacities of from 200 yds. of 10 lb. line, 340 yds. of 6 lb. line, 100 yds. of 4 lb. line, down to 200 yds. of % lb. line. "Notural-form" knot a real handle, hondle folds back for storage. Corrosion resistant black finish. Complete with extra spoal, spool case, cloth Shaps, wt., 1 lb. 40.

FT-\$13 "SPIN-TACULAR" REEL

(G) NEW! "7 SEAS" SPIN REEL

• ALL THE FEATURES OF THE MOST EXPENSIVE REELS

The "greatest" for surf-casting, trolling, spinning or any salt water Fishing. High pressure moulded of an aluminum-magnesium alloy, surface treated and anti-corrosion coaled. Eliminotes need for the usual care and cleaning associated with salt water gear. Unique planetory gear system crosswinds line for greater line capacity and the smoothest, longest costs you ever madel "Back-losh" is a thing of the post. Fully adjustable, positive drag action. Built right into the spool for smooth, constant tension. Full boil pick up of chromed bronze. Line guide of super hord chromium corbide. Torpedo handle, spring loaded, folds back for storage. Positive, finger tip anti-reverse control. All the features normally found in the most expensive reels. Actual weight 19 axs. Shops. Wt., 2 lbs. FT-514 "7 SEAS" SPIN REEL.

(H) "7 SEAS" TROLLING REEL

• FINGERTIP PREE SPOOL CLUTCH • ADJUSTABLE STAR DRAG

Universal salt water reel. Powerful star drag, free spool, fast retrieve. All metal construction of highly corrosion resistant allays. Aluminum-magnesium alloy spool. 3 Inch diameter side plates—with salin black, triple baked, rust resistant, permonent finish. Conventional free spool lever. Hardened branze gears. Counter weighted, torpedo handle. Chrome plated, hand polished frame. Self lubricating, long lasting branze bearings. Capacity 250 yds. of 27 lb. line. Actual weight 17 azs. Shpg. wt., 1% lbs. FT-515 "7 SEAS" TROLLING REEL Net 7.95

SAVE NOW • Special Sports Sets

These motched sets save you even morel Specially selected tap quality-latest designs. Combinations selected for ease of handling—include all necessary basic equipment—offer you more fishing fun and enjoyment at budget prices. Items sold separately cost more—you save by purchasing the complete set. Check these kits for features found only in much higher priced equipment



Special Spin Set: "Best-Buy" spin-Special Spin Sets "Best-Buy" spin-ning aufift. Especially desiroble for beginners—fine enough for the "old-pro." Set includes: Tubular fibergloss 5 ft. spinning rad (FT-501), simple-to-use, light spinning real (FT-512), 200 yds. of 6 lb. monofilament line (FT-527), 24 finest, divided wing flies (FT-531), rigid polyethylene tackle box (MC-53). If purchosed separately would cost 10.47. FT-503 Shpg. wt., 4 lbs...Net 8.99

rush Button" Spin Cest Set: An easily handled casting set. Designed to give the fisherman complete control. Mast popular outlit—contains all necessary basic equipment. Set includes: 5% ft. glass spin-cast red (FT-503). "Push Button" spin cast reel (FT-516) pre waund with 80 yds. of 6 lb. manofilament line, practical plug, 12 selected "pappers" (FT-529), and rigid, palyethylene tackte box (MC-25). Shaps. wt., 5 lbs.

FT-506

Net 10.29 'Push Button" Spin Cast Set: An

(F) PT-513





19 "Spin-Tacular" Spinning Set. The finest oil 'round spinning gear for the maney. Suitable for both fresh and light solt water spinning. Motthed components for ease in handling, lang life and extra enjoyment. Set includes: 6½ ff, hallow glass "7 Sess" rod (FT-502), "Spin-Tacular" all-purpore spinning real (FT-513), 200 vds. 8 lb. menofilament line (FT-528), 24 "New England" Salmon streamers (FT-522), rigged worm lure (FT-524), rigged eel lure (FT-523), and rigid polyethylene tackle bax (MC-25). Shpg. wt., 5½ lbs.



MINIATURE IMPROVED 8.33 HOIST

SMALL ENOUGH TO FIT YOUR POCKETI

PRE LUBRICATED FOR LIFE! LIFT 1000 TO 2000 POUNDS!

The only truly miniature hoist available. Indispensable in industrial plants and workshops. Perfect for hunters-boaters-airplane awners-matarists. Great strength and tiny slize permits hundreds of uses — can be a real life saver in an emergency. Mode of high grade aluminum with steel oxles. Prelubricated for life. Two lifting slings — one on top and one at bothom — with heavy, welded steel rings. Nylon coble supplied tests at 550 lbs. per strand. "Midget" hoist comes with 70 ft. of Nylon coble, has a 5 to 1 ratio — 1000 lbs. lest — and weighs only 13 oz . "Tiny" hoist has 100 ft. of Nylon coble, a 7 to 1 ratia — 2000 lbs. lest — and weighs only 15 oz . Does all your lifting safely and easily.

HD-330—"Midget" shpg. wt. 11/5 lbs.Net 8.33 HD-331—"Tiny" shpg. wt. 2 lbs.Net 10.83

MAP MEASURER & COMPASS



- Not a gadget—but a real in-
- map.

 Measures curved or irregular shopes.

Exclusive et Lafeyette! A map meeuver with built-in compass! for the motorlist—camper—hunter—boating enthusiest. An indispensable unit of equipment, Just trace along route on map and multiply miles—per inch factor by reading on dial. Also reads directly in inches up to 39". Built-in magnetic compass has cerdinal and second-ery points—full 360" markings in tenths. Accurate and dependable. Complete with leather sheath. Shpp., Wt. 8 oz.

F-47 LIST 2.75 Not 1.59

Burgess BOAT-LITE



Easy To Install — No Extros to Buy Meets U.S.C.G. Requirements For All Class "A" And Class "1" Boats

Running Light And Stern Light Running Light And Stern Light

New Burgess Boat-lite kit full of feotures never before affected to small boot owners. Contains every thing needed to meet U.S. Coast Guard requirements for lights on small boots, New combination bought with optically perfect Red-Green fresnel lens. Projects light over one mile. Correctly shielded-made of special corrosion-resistant aluminum allay. New stern light-flag staff has unique plug-in feature. Quick-easy temboral for safe keeping No nails, screws or clamps just plugs in. Corrosion-resistant aluminum allay with lamp visible for 2 miles. Kit includes heavy-duty, 6 volt, sealed-in-steet battery, all necessary hardware, mounting brackets, wire, weather proof switch and instructions. Shap. Wt., 7 lbs.

Burgess BK-100 list 17.95 Net 8.20

Pocket Generator Flashlight

Pocket Generator Flashlight

NO BATTERIES—EVERT • ALWAYS READY TO OPERATE!

The perfect pocket flashlight for homecar—or to carry with you. Plenty of bright
light just by successive activation of generator level. No batteries to corrode or go
dead, Balanced flywheel generator for
ease of operation. Only 23% x 1 x 112",
slips easily into pocket or purse. Never
wears out. Ideal for campers—touristsmotorists. Weighs only 6 ozs. Made in
Germany

E-150 List 6.40 Shop wt 1 lb Not 3.70

F-169 List 6.49 Shpg. wt. 1 lb. Net 3.79

Page 22







(I) "DIAL-A-FLY" ASSORTMENT

One dozen of the most popular files available. Expertly tled by skilled craftsmen. Packed in a round, plastic, six compartment container. Selector cover rotates for instant choice. Packet sixe-handy-snag proof. Includes such fovorites as Royal Caachman, Black Gnat, Silver Doctor, Parma Belle, Yellow Sally and Mosquita all tied on #10 hooks. Shpp. wt., 6 ars.

FT-530 "DIAL-A-FLY" ASSORTMENT Net .89

(J) 24 ASSORTED WET AND DRY FLIES

24 hand tied-expertly detailed-most popular flies. The perfect kit for the beginner or old pro. All tied on #10 hooks. Includes such famous types as Royal Coachman, Black Gnot Ifemale), Red Ibis, Silver Doctor, Quill Gordon, etc. Each fly is individually identified. Made with universally accepted fly materials. Wt., 8 as. Mo-328 24 ASSORTED WET AND DRY FLIES

Net 1.05

Flashes at a nibble! Watertight Body! Adjustable Contacts! Doubles your "Nuck" and fun while night fishing. Excellent an cloudy days, at dawn ar sunset. So sensitive even beginners do well. Flickers at a nibble—lights with a bite. Can be used as a colorful sensitive float even without the bottery and light. Self-contained miniature battery and bulb are easily replaced. Long battery life. Made of corrosion-proof plastic and brass. Weighs less than 1 az. with battery. Complete with bulb and instructions. Less battery. Shpg. wt., 4 az.

MD-344 "BITE-A-LITE" FLOAT

Net .08

Net .08

(L) 24 DIVIDED WING FLIES

Finest quality, hand tied dry flies. Skillfully made with just the right amount of natural-tip hackle. Upright divided wings cocked well forward. Decorated silk bodies. Favarlte patterns: Black Gnat, Silver Dactor, Royal Caachman, Yellow Sally, Parma Belle, Etc. Campore to flies selling as high as .30 each! #10 hook. Shpg. wt., 8 ozs. FT-531 24 DIVIDED WING FLIES

(M) 24 ATLANTIC SALMON STREAMERS (M) 24 ATLANTIC SALMON SIREAMERS

Famous "New England" streamer flies. Resemble small, live minnows in the water. Beautifully dressed and flited with lungle feathers tied in at the head. All dressing tight and smooth. Two dozen all time favarites tied on long shank No. 2 hook. Includes Block Ghost, Light Tiger, Aunt Ider, Gray Ghost, Parmachene Belle, Jock Scatt, etc. No two alike. Regularly sell ps high as .49 eo. all 24 identified on labeled cord. Shpg. wt., 12 azs.

FT-532 ATLANTIC SALMON STREAMERS

Net 2.39

(N) FISHERMAN'S 8" LONG NOSE PLIERS

HARDENED TEMEPERED STEEL
KNURLED SURE GRIP HANDLES

A sturdy all purpose 8" Long Nose Plier especially suited for the fishermon. Mode of rust resistant drop forged steel—ideal for use as leader bender, hook remover, wire cutter—literally scores of uses in the fishing boat or workshop. Not.89

Not.89

(O) 'NITE-LIFE'' WORM LURE

This life like warm lure consists of a 3-gang hash harness with 5%" soft plastic warm tied to harness with 15 lb. test nylon. Fluarescent red beads with revalving nickel propeller blade and red plastic lure combine to make this excellent shallow running lure. Size 4 gold plated haaks. Actual Lure Wt., 1/2 az. Shpg. wt.,

4 oz. FT-526 "NITE-LIFE" WORM LURE

(P) "WIGGLY-EEL" NATURAL LURE

A natural soft black plastic eel tied with 15-lb, test nylan to a 2-gang hook harness. Wire shaft directly attached to eye of front hook with revolving propeller blade located between 2 solid metal beads. Size 2 gold plated hooks. Shpg. wt., 4 oz.

WI., 4 oz.

(Q) 12 SELECTED FANCY POPPERS

A choice selection of hand pointed popping bugs for blue gills, bass, trout, pan fish. All proven fish-getters. 4-cork shaped, scaled body, with hackle and tail feathers. 4-cork shaped, frog type with rubber hula skirt. 4-"open-mouthed" with feather streamer. Haaks wan't pull out. All on #10 hooks. Regularly cost over 30 cents each! Shpg. wt., 8 azs.

FT-529 SELECTED FANCY POPPERS

Net 1.29

(R) MONOFILAMENT SPINNING LINE
Limp, DuPant Nylan, "Trigger Fish" manafilament spinning line. Extra strangquick drying-small diameter. For open or closed face spinning reals. Choose
either 6 lb. or 8 lb. test. 200 yd. lengths. Shpg. wt., 8 azs.
FT-527-200 yds. 6 lb. Line
Net .69
FT-528-200 yds. 8 lb. Line
Net .79

(S) 400 YDS. NYLON LINE FT-5 34

Net .98



COMBINATION BAIT-CAST AND FLY-CAST FISHING KIT

- Fine Quality Split Bamboo Rod
- Converts from 8 ft. Fly Rod to 5'4" Casting Rod

The perfect all-around "Fishermans-Friend." Features a split bamboo rod with interchangeable tips and reversible handle. Chrome plated, screw locking reel seal. Shaped cork handle. Chromed stainless steel guides and extra deep chromed brass ferrules. High gloss lacquered surface-colorful, sealed nylon windings. Kit contains 4 pc. Split bamboo rod, brass swivel, split-shot, line winder, float, nylon line, 12 assorted flies, 2 streamers, 6 hollow point hooks with leaders, leader cutting scissors and fitted wooden case to hold complete kit. Shpg. wt., 3 lbs.

FT-504 Regularly 9.95 Net 5.95



Beachcomber Tackle Box

Constructed of rigid polyethylene, this rugged box will withstand worping, denting, cracking, breeking and corrosion. Salid brass hardware and nylon latch. Handy cantilever tray provides for lures and small tackle with ample room in the botton for bait and spincasting reels. Dimensions 12% long x 4% deep x 5% wide. Weighs only 1% lbs. Shpg. wt., 21 lb.
MC-25 BEACHCOMBER TACKLE BOX
Net 2.05



Golf Ranger Finder

This exciting new Range-Finder is bound to prove an invaluable addition to your Galfing Equipment. Featuring a precision 6X lens capable of measuring from 40 to 250 yords, this handy packet size instrument enables the galfer by means of a simple focusing adjustment to easily compute the distance to the next hole. Guess work is completely eliminated and choosing the correct club is greatly simplified. Supplied with suede leather carrying case and simple instructions. Shpg. wt., 1/5 lb.
F-427 GOLF RANGE FINDER Net 9.95

This powerful aeam swivel head search light features a swing-up handle red blinker light which sets at any angle within a 90° arc for sofety warning and emergencies. Separate blinker and beam switch aperates individually or jointly. Perfect for all autdoor activities, road emergencies, home and farm. Rugged metal case in red enamel with lustrous chrome swivel head and handle. Uses 6 volt battery or 8-standard floshlight batteries. Shpg. wt., 3 lbs.

HYDRAULIC PUMP OILER

PERFECT OILER FOR 1001 USES LIGHTWEIGHT-HANDY-TRANSLUCENT TENITE

A new shap-hame-attice accessory.

Gives fine, pressurized stream that lubricates hard to get at places.

Seamless construction of durable tenite. Finger tip plunger. Holds 4 ass. of ait. Lubricates all types of machinery—hand and power tools—appliances—fixtures—toys—conveyances.

Remavable base for easy filling. Drippraof—leak proof design. Outmades the old fashianed all con. Shpg. wt., Vy 1b.



(5)

IMMERSION HEATER

IMMERSION HEATER

Instant Heating © Full 300 Warts

Useful in lab-shop-harne

Hi-heat immersion coil brings water to a
boil in minutes. Heats instantly to a full
300 worts. Highest emclency in heating
liquids of all types. Safe—convenient—entirely sheathed
and seeled in nickel-plated brass. Specially shaped
tubes provide minimum distance of heat transfer. Excellent for use in narrow containers requiring minimum
displacement. Nichrame alloy heating element. Many
applications in lob, shap and home. Overall length
6/½", immersion length 4", coil dia. 1½". For 115 V.
AC or DC. Shpg. wt., 8 az.

P-388

Net . 98

AUTO-BOAT COMPASS

Cars-Boats-

Trucks-Troctors • Illuminated and Non-Illuminated



Mounts anywhere on cors-boots-trucks-tractars-mater-cycles. Non-glare, universal mounting bracket. Most easily campensated campass availables, Just a twist of the bottom or top knob. Extremely occurate. Constructed to withstand all driving shacks, Important to the daily driver, Invaluable for boots and tractors. Large viewing window and flaures for ease of reading. Includes mount-ing accessories and instructions, Illuminated model in cludes both 6 and 12 valt bulbs. Shpg. Wt. 1 lb.

E-322 Nan-Illuminated F-323 Illuminated Model

HEDGE TRIMMER

ATTACHMENT PROCESSIONED

Converts any 1/4" drill into an easy handling hedge-trimmer. Steel and oluminum construction. Sickle-type 10" cutting blode. Simple cam action, 3/4" stroke. Lightweight . . . easy handling. Shop. wt., 3 lbs.

HD-97...

BABCO GRASS TRIMMER 100

 Fast Shearing actions • Safe operation with

blade guard
Smooth, Clean Cutting Now you can take advantage of that electric drill in your work shop to trim grass with this unit. Attaches to any \(\frac{1}{4} \) electric drill, Ideal for cutting grass grown over sidewalk, stepping stares or close to wall. Neal and fast cutting. Ten limes faster than hand shears. The rotary blade is well guarded, tog and sides, to insure sale operation. \(5\frac{1}{2} \) in the control of the could be easily re-sharpened with any kitchen keife sharpener. Shops, wt., \(1 \) ib.

MD-399. Lis \(3.50 \)

Not \(2.6 \)

Not 2.69

"TRIG · A · MATIC" HOSE NOZZLE

Automatic Pistol Type
 Complete-Simple One Hand Operation

Latest in garden hose nazzles. Precision built pistol type. Four spray action-outomatically locks in position. Adjustment for fine variations. Trigger release button-far instant, ane linger shut off. Chrome plated and highly palished. Stainless steel springs and neopene gaskets. Gun sight permits hanging or starage. Shop. Wt., 11b.



Multi-Use WRENCH SET

HO-332

• 8 Predsion Wrenches



analysis allay tool steel, Hea treated and hardened. 16 sizes cover the most countered nuts in the automative-TV-radia-appl habby fields. Sizes range from 13/64" to 7/16 cludes case with transparent cover. Shap, wt., 8

Neatly — early — punches holes and sets eyelets in fabric — carvas — plastic — leather — paper — card board. Does a professional tooking jab every time. Use it on belts, shoes, sneakers, tarpoulin, luggage, sports equipment, flags, banners, shower curtains. Prevents tearing of materials — actually strengthens them. Hundreds

AIR CONDITIONER FILTER

FOR ANY ROOM AIR CONDITIONER Made OF B.F. GOODRICH "TEXLITE"

ONLY 99¢

1.98

POLICE

. PERMANENT - WASHABLE

• Free flow design increases efficiency. Famous Goodrich "Texlite"—thousands of robberized bustles — give optimum oir flow and maximum filtration. Rigid—needs no frame. Retains shape under pressure—will not flake. Trims to fit ony room air conditioner. Shap, wt., ½ lb. ML-152 FREE FLOW FILTER Not -99 ea Net ea. In lots of 3 .75

TRANSPARENT UTILITY BOXES



staring screws, nuts, balts and hundreds of other small parts. With hinged cover and built-in

Stock No.	Dimensions	Compart.	Wt.	Eoch
MS-51	7"x31/2"x1-3/16"	5	5 Oz.	.41
MS-52	81/4"x41/4" x11/4"	6	7 Oz.	.53
MS-53	7"x31/2"x1-3/16"	9	5 Oz.	.41
MS-54	81/4"x41/4" x11/4"	12	7 Oz.	.53
A45.55	103/, "=A 4=11/,"	18	17 Oz.	11.35

2 in 1 EYELET TOOL PUNCHES HOLE—SETS EYELET AT SAME TIME COMPLETE W 1.59 • COMPLETE WITH

SWING-UP

LANTERN

FLASHER-SPOTLITE

MARINE COMPASS

Movement

• 2° Graduations

3.29

Imported composs for soil or motor bouts. Entirely non-mognetic and corrosion resistant. Finely made of glass-brais- and lacquered aak. Direct-reading 300° dial. Calibrated every 2°. All cordinal points are aversized. Sharp, black markings on white background. Compass is easily removed from gimbal for safekeeping. May be mounted as a permonent binnocle or used as a portable unit. Overall dimensions are: 4½" x 4½" x 3½" Compass is 74mm.-Shap. wt., 1½ lbs.

F-386

BUILD YOUR OWN LAFAYETTE QUALITY KIT

NEW! LAFAYETTE 15-IN-1

TRANSISTOR EXPERIMENTERS KIT A TRULY REMARKABLE VALUE Practical-Educational-Entertaining

EXCITING PROJECTS BUILD ALL OF THESE



- . ELECTRONIC TIMER BURGLAR ALARM
 - 2-STAGE AUDIO AMPLIFIER
- PHOTO-ELECTRIC RELAY CODE PRACTICE OSCILLATOR
- AUDIO PREAMPLIFIER
- ELECTRONIC FLASHER TY COMMERCIAL KILLER
- . RAIN ALARM SIGNAL INJECTOR
- INTERCOM
 2-STAGE BROADCAST RECEIVER
- WIRELESS BROADCASTER
- WIRELESS CODE TRANSMITTER REGENERATIVE RADIO RECEIVER

AN IDEAL LABORATORY KIT WHICH ASSEMBLE THE BASIC COMPONENTS HELPS TEACH YOU HOW TRANSIS-TORS WORK IN A PRACTICAL WAY.

... THEN WIRE EACH CLEARLY EX-PLAINED CIRCUIT BY SIMPLY CON-NECTING THE PROPER LEADS. THE MOST EXTENSIVE TRANSISTOR LAB KIT IDEAL FOR STUDENT - HOBBYIST - EXPERIMENTER

Lafayette's new 15 in 1 transistor experimenters kit is the most practical intre-Lafayette's new 15-in-1 transistor experimenters kit is the most practical introduction to the understanding of the operation of transisters — since it utilizes basic transister principles and circuitry. Its unexcelled simplicity of construction provides a fascinating and educational program of instruction. You build practical, useful operating transistor devices that teach you transistor fundamentals and applications.

This versatile kit is supplied complete with transistors, relay, photosell, dual headphones and all necessary items including lead wire, solder. You also receive an easily understood instruction manual which explains just how each of the 15 circuits works. Battery powered, the kit is shockproof and safe-

KT-134A 15-in-1 Transistor Experimenters Kit (Less botteries)......Net 14.95

Burgess Z or RCA VS034 (8 required)

SAVE!

NEW!

EXCITING "EXPLOR-AIR" RECEIVER KIT



550-1600 Kc broadcast

- 1.7-5.0 Mc., 5.0-14 Mc., 14-30, Mc. shartwave bonds
- Complete bondswitching from front panel
- Built-in Big 4" PM Loud-speaker



The most sensotianal shortwave economy receiver kit ever offered. A complete shortwave and standard broadcast set which covers the entire region from 550 kilocycles to 30 megacycles. Four whole bands of fascinating programming unavailable elshwhere. Perfect far students of languages, radio amateurs and casual listeners.

Only a regenerative circuit can offer such amazing performance and yet be so simple to build. Building this fine kit is an absolute pleasure — it's so well designed you can't go wrang. Kit includes all the parts you need, and the detailed step-by-step instruction book with its giant pictorial drawings shows you just how to put them tagether.

One frant ponel knab does all the bandswitching at the filck of the wrist, immediately taking you from band to band. All calls are prewound far greater occuracy. This kit is so easy to build a child who can read could do it (and many already havel) The chassis is completely isolated from the circuit, so there is no shock hazard.

This precision radio kit is just full of extra features. Cample's 4 band caverage of broadcast stations, international broadcast bands, amateur, maritime, fire and police services, yes, even satellite signals! Big 4" epeaker and sensitive circuit with 50C5 autput stage and 12AX7 regenerative detector and amplifier stages give you all the valume you want. Phone jack far privacy automatically disconnects speaker. All controls are on the front panel: On-Off Volume, Main Tuning, Band Spread, Bandswitch, Antenna Tuning, and Regeneration. 110 Valt 50-60 cycle AC-DC power supply lets you use this fine set anywhere. Size: 10" x 7" x 5". Everything needed for unexcelled reception is combined in a campact, economical package.

KT-135" EXPLOR-AIR RECEIVER KIT (Less Cobinet).

KT-135 EXPLOR-AIR RECEIVER KIT (Less Cobinet)

TELEGRAPH

3 TRANSISTOR SUPERHET POCKET RADIO KIT A TRUE POCKET SUPERHET RECEIVER-NO EXTERNAL

A remarkable sensitive, super-selective pocket superhel receiver with astonishing performance ever the complete broadcast based. User 2 high-frequency and one audio translator plus efficient diode detector and restricters 2 specially matched if translator plus efficient diode detector and restricters for maximum power transfer. The promopenents are boused in a precisional looking being plastic case, a precisional looking being plastic case, a precisional continued by attractive marcon and silver statistics did in the parts. It is a translator, case did received and easy to follow step-by-step instructions. 45% 22% x11/16%, X7-116—Complete Kit, less earphone and bottery Net 14.95

K7-116—Complete Kit, less earphone and bottery Net 14.95

MS-260—Super Power Dynamic Eurphone. Net 3.95

MS-240—Super Power Dynamic Earphone.......Net 3.95

For those interested in mostering the international code, on audia tane ascillator is essential. The circuit of this transistorized feedback ascillator has the simplicity of the nean glow, the signal strength of the vacuum tube, and requires only two pentite cells for weeks of service. It may be used for solo practice, or two may send and receive with the same unit. Kit cames complete with Transistor, Telegraph Key, Resistors, Candensers, Masonite Board, etc., and Schematic Diagram.

Diogram. Net 2.99

RADIO KITS

ONE TRANSISTOR POCKET RADIO KIT—KT-97

IDEAL FOR STUDENTS, MOBBY.
ISTS AND EXPERIMENTERS

PRE-PUNCHED CHASSIS FOR ADVANCEMENT TO 2 TRANSISTOR KIT
Ideal, low-cost transistor pecket radio kit.
Super-selective ferrite loop anterna permits
spord reception up to 50 mile radius with
soprox. 50 ft. antenna and rood ground.
Provision for advancement to 2 transistor
receiver. Complete Kit mile detalled instructions. 3%" x 25%" x 1". Shps.
wt. 1. lb. (less boftery)
KT-97—Complete, less earphones
and batteries.

TRANSISTOR POCKET RADIO KIT—KT-98

NEW! SEMI-AUTOMATIC "BUG"

AND 2 TRANSISTOR POCKET

MS-368 Sensitive Economy Dynamic Earphane
Battery 9 v. RCA VS309

CANNON AM-15-1 Single Headset BATTERY 1½ v. Burgess No. 7 (2)

TRANSISTOR CODE PRACTICE OSCILLATOR KIT

. NO EXTERNAL GROUND



Value 20.00

KEY

9.95

Fully 's selling at almost twice acquamments for speed and comfort, so important; the right siming when using a "bug." Heavily weighted with solid steel block in bose. Speed adjustable 10 wpm to as high as desired. %" silver contacts; weight scale for reproducible speed settings. A real bargain for radio amateurs and professional CW operators! 6%" long x 3" wide x 2%" high, exclusive of knobs and feet. Shap. wt., 3% lbs.

M5-435 Semi-Automatic "Bug".

Net 9.95

Telegraph key chrome and nickel plated with both adjustable spring tension and contact charance. When high frequency buzzer has frequency adjustment with locking to keep tone constant. Screw type pin jack terminals for headphane connection. Warks with Inexpensive 1/y, voltor bottery. Heavy black molded phenalic base and buzzer housing. Base 6½ 22½ 12½, overall length 8½. Spag. 2½ 12½.

ing. Base o% = 2% = 1%, constitution of the state of the

NEW! WAYELLE "BRASS-POUNDER'S" KEY


1.69

SUPER-SENSITIVE PHOTOCELL ELECTRONIC RELAY KIT



Lofoyette SK-109

Ronette "OV"



ADJUSTABLE SUPER SENSITIVITY-WORKS WITH JUST A FLASHLIGHT AT 250 FEET!

. NEEDS NO SPECIAL HIGH-INTENSITY LIGHTS

. INSTANTANEOUS OR SUSTAINED OP-**ERATION ON THE FLIP OF A SWITCH!**

Ladayette's latest achievement in a super-sensitive photocell relay kit. Ideal for sustained aperation required for burglar alarms, door buzzers, for turning an parch and hame lights at night to discourage prowlers when away in the evening. Excellent for instantaneous an-off aperation required for counters, packaging, door apening, motor activation and cauntless industrial applications. A flip of the switch converts unit fram instantaneous "an-off" to sustained "on" operation. A simple push an the "RESET" switch apens the external circuit and turns off the alarm. The unit operates an 110 valts AC and incorporates the efficient 5823 cald cathode tube, permitting langer life since there are no filaments to burn out. The cantralled circuit is plugged into a convenient 110V AC output socket. A simple change in wiring (in instructions), as well as convenient input terminals, enable you to supply the external circuit with any desired voltage. Relay centacts rajed at 3 amps permitting up to 300 watts external load at 110 Valts AC. Complete with all parts, photocell, tube, chassis, silk-screened metal cabinet and easy-ta-follow illustrated instructions. Size: 3" x 4" x 5". Shap, wt., 3 lbs. Net 12.95

ALL LAFAYETTE KITS ARE SUPPLIED WITH EASY-TO-FOLLOW INSTRUCTIONS

NEW! LAFAYETTE STEREO PHONO AMPLIFIER KIT



- GANGED TONE CONTROLS
- STEREO-MONAURAL SWITCH
- . 4 WATTS STEREO OUTPUT
- ISOLATION TRANSFORMER
- . SEPARATE VOLUME CONTROLS

.04 VOLT SENSITIVITY

• SEPARATE VOLUME CONTROLS
is a complete 4-watt hi-fi sterea amplifier having 2 watts autput per channel. Features separate
lume control for each channel; ganged lone controls; Sterea-monoural switch to feed one channel to both
sockers and to reverse the channels. Just right for any use where a small sterea amplifier is required—idea
custam maunting in even the tightest locations; specially designed for small apartment sized sterea

systems.

An isolation fronsformer makes this circuit extra safe. Other circuit features for better performance include application of negative feedback to driver and output stages for wide-range response and extra low distortion. Qual-triade 12AX7 tubes function as vallage amplifier and driver, providing very high gain: 40 millivalts drives this unit to full output. This tremendous gain, plus an extremely high input impedance make this amplifier perform exceptionally well with all types of ceramic and crystal pickups, as well as tuners, tape recorders, etc. Selenium rectifier power supply has extremely good regulation. Logical layout high quality parts, plus complete instructions for assembly, make this kit a pleasure to build and use. For 3.2 or 8 ohm speakers, Tubes: 2-50C5, 2-12AX7 plus selenium rectifier. Size: 9½" x 5" x 4½". Camplete with all parts. For 110-120 volts, 60 cycle AC. Shpg. wt., 7 lbs. KT-126—Kit, Camplete Net 18.95

COMPLETE STEREO PHONO SYSTEM KIT



PLAYS STEREO AND MONAURAL RECORDS

ONLY 59.95

Enjay fine sterea performance with this "easy-to-assemble" exclusive Lafayette package. The complete system consists of Lafayette KT-126 basic sterea phono amplifier kit, the renowned Callaro TSC-040 4-speed outematic record changer, the new Ronette "OV" Turnover Stereo cartridge with dual sopphire styli for stereo and manaural records, and two Lafayette SK-109 Miniature Mi-Fi Speakers and Enclasures. The amplifier kit has many fine features including 2 watts per channel with separate volume control, "stereo-reversal-manaural aperation" switch, and isolation transformer to eliminate shock hazard. The 4" # 6" 5 worth speakers are haused in beautiful mahagany wood cobinets, work from cither 4 or 8 ahm autputs and are supplied with 25 ft. of coble for haakup. You save 16.58 over resular catalog pricest

PK-299 Stereo Phono Kit System

Net 59.95

KT-126 Stereo Amplifier Kit Only. Camplete with all tubes, ports and instructions. Shpp. wt., 7 lbs. Net 18.95

COMBINATION MONEY SAVER

KT-126 Sterea Amplifier Kit and Ranette "OV" Sterea Turnover Cartridge with dual sapphire styli





1.95 LAJATETTE

CODE PRACTICE SET Economical and practical

BATTERY Burgess 2

MS-369 Sterhascape Headsel

code practice key and buzzer unit for learning code. Telegraph key chrome and nickel plated

Economical and practical cade practice key. Salid, heavily chrome and nickel plated metal parts, molded nickel plated metal parts, molded person and adjustable contact clearance, sion and adjustable contact clearance, and a contact clearance, and contact clearance, sion and adjustable contact clearance, sion and adjustable contact clearance, and contact clearance and cont

NEW! high frequency CODE PRACTICE BUZZER



Reg. Value 2.50
Adjustable frequency buzzer ideal for Individual or group code practice.
Black malded phenolic housing — Works with 1½ volt battery. Screw adjustment for changing tone. 17/6" diam. x 1-1/16" high. Shap. wt., 6 ozs.

MS. 436 Buzzer. Net .79

MINUTE RELEASES and SPECIAL VAL

GONSET 2-WAY RADIO



12.45 DOWN

No exam required . . . no code. U.S. Citizens required only to complete simple F.C.C. form

Far presanal use, business or pleasure Simple to operate—no technical knowledge required
Wide range radia...not confined to line-of-sight transmission Compact...lightweight
rugged—can be used anywhere

A complete 2-way voice transmitter-receiver and power supply in a single compact unit aperating an the 27 MC Citizens Band. Crystal controlled for highest stability—no fussy tuning—no drifting off channel frequency. Simple press-to-talk feature on microphone leaves ane hand free while using set. Speaker is built into front panel—incoming calls easily heard some distance from set. Full 5-walt transmitter (maximum allowable) for maximum range. Other features include an adjustable "squelch" control for muted standby operation and tuning indicator an front panel for visual check of proper transmitter operation. Foolproof, lightweight, dependable, this new citizens radio has hundreds of uses—boating, hunting, fishing, emergency communications, construction crews, surveyors etc. Complete unit measures only 5½" H x 6¾" W x 6¾" D. Shpg. Wt., bs. Three madels available:

MODEL 3303. Camplete with microphone and tronsmitter/receiver crystols for one channel. Less ontenna. For
115 Volts AC
MODEL 3304. Same as above, but for 12 volts DC aperation. Net 124.50
MODEL 3305. Same as above, but for 6 valts DC aperation. Net 124.50
Net 124.50

Mighest quality antennos, ruggedly built for use in varied climatic conditions. For base station or mobile service.


Mobile antenno—Cail loaded whip antenno—Madel 3297

Net 13.50

Ground Plane Base Station Antenna—Complete with 50
ft of transmission line, hordware and ready for installation—Madel 3296

Baam Antenno—Directional 3-element beam. Ready for installation—Madel 3302

Net 39.95



KIT OF 20 INSULATED **ALLIGATOR** CLIPS

Two kits of insulated alligator clips. Kit A consists of 20 large size clips, kit B consists of 20 small size clips. All have sturdy nickel-plated jaws with strong spring and hard bite. Each kit contains 10 red and 10 block alligator clips, corded and bagged.



KIT OF 10 5-WAY BINDING POSTS

- FOR BANANA PLUG • FOR PHONE TIP PLUG
- . FOR SPADE LUG
- . FOR ALLIGATOR CLIP
- FOR ALLIGATOR CLIP
 FOR STRAND OF WIRE



V5084 V5014 V5012 V5013 V5086 V5055 V5015 V5082 V5215-V5318 V5016 V5217 V5090 V5316 V5219

V5064 V5054 V5052 V5050 V5060 V5019 V5057W V5058 V5047 V5059

Flashligh

"A"



Batteries







BATTERIES FOR PORTABLE RADIO RECEIVERS TRANSISTOR AND HEARING AID BATTERIES

. Ea.	BURGESS	RCA TYPE	REPLACES EVEREADY	VOLTS	SHPG. WT. N	T EA.
13	NE	V5073	W468	1.5	1 oz.	.08
69	A4	_	_	1.5	2 oz.	.69
77	404	_	274	6	3 lbs.	3.05
13	2N6	V5305	246	9	1 lb.	1.30
15	2U6	V5323	216	9	3 oz.	.95
46	223	V5324	243	41/1	% oz.	1.11
28	COX	-	2356	9	2 lb1.	1.10
65	D5	V5315	707	71/1	1 16.	1.05
08	Dó	V\$306	276	9	1 1/2 1bs.	1.26
76	DOP1	V\$301	2506	3-6-9	2 lbs.	1.58
82	065	_	2761	9	1 1/4	1.05
85	Mó	V5322	266	9	2/5	1.05
73	Pó	_	226	9	3 oz.	.77
04	XX9	V5304	239	9-13.5	4 oz.	.95
63	K10	_	417	15	4 02.	1.14
26	U10	V5083	411	15	2 01.	.81
05	Y10	-	504	15	2 oz.	.81
	K15	-	420	22.5	4 oz.	1.23
	U15	V\$084	412	22.5	3 oz.	1.05
.05	Y15	_	505	22.5	2 oz.	1.05
.49	K20	-	430	30	6 or.	1.51
.98	U20	V\$085	413	30	2 oz.	1.23
.45	Y 20	_	506	30	2 oz.	1.30
.75	Y205	_	507	30	2 02.	1.30
.92	_	V5313	E9	1.4	3 oz.	.51
.76		V\$400	E233	4	6 oz.	1.80
.21		V\$312	E146	9	2 oz.	1.54
.17	P6M	V5300A	226	9	5 oz.	.95
.75	_	V5309A		9	2 oz.	1,53
.07	130	V5335	635	1 1/2	3 oz.	.16
45	230	V5336	A100	11/1	6 oz.	.16
.15	930	V5334	1015E	1 1/2	4 oz.	.13
.15	_	V5321	2731	41/2	3 lbs.	1.93

MALLORY MERCURY BATTERIES FOR TRANSISTOR & RADIO APPLICATIONS

Type	Volts	Cap.	Max. Orain		Shpg. Wt. Ea.	Singly Ea.	Std. Pkg. Eo.
TR152R	2.5	400	40	2	2 01.	.79	.72
TR 132R	2.5	1000	100	2	3 02.	.92	.84
TR 1338	4.0	1000	100	2	3 oz.	1.30	1.18
TR233R	4.0	2200	60	1	9 02.	1.80	1.80
TRIGSR	6.5	500	50	2	3 02.	1.80	1.64
TR 146R	9.0	400	40	1	3 02.	1.58	1.58
RMIR	1.34	1000	100	*4	3 oz.	.42	.38
RM128	1.34	3600	250	2	3 oz.	.90	.82
RM400R	1.34	80	10	5	1 oz.	.28	. 25
RM4018	1.34	800	100	2	2 01.	.37	.34
RM5028	1.34	2400	200	2	3 oz.	.68	.62
RM601R	1.34	1800	150	2	3 oz.	.56	.51
RM625R	1.34	250	20	4	1 oz.	.33	.30
RM630R	1.34	350	20	4	1 or.	.33	.30
ZM9	1.5	2400	200	2	5 oz.	.56	.51
DM-9N	1.5	2400	200	2	5 oz.	.59	.54

OM-FIE	1.3	2400	200	-	-			
BAT	TERIES	FOR	PORT	ABI	.E	REC	ORDER	15
MFR.		TYPE	VO	LTS		SHPG	. WT.	NET
Burgess	2	X7	10	1/1		1/2 1	b.	1.8
Burgess	2	X62X	1 1/2	-9		1/2 1	b.	1.8
Burgess		XX7	10	1/5		%		2.0
						0		3 7

STEREOPHONIC HONOGRAPH



FLEXICONE KIT






Thoroughly tested and opproved, Flexicone will improve your speaker sound quality and frequency response by softening the outer edges of the speaker cone thereby reducing the cone resonance from 10 to 40 cps. Easily applied in Just 15 minutes. One three-bottle kit contains enough material for four 8" speakers. Camplete with instructions.

MS-571 Net 1.76


TONE ARM CONTROL



An obsolutely essential addition for every Mi-Fi enthusiast. Recard, cartridge and needle life will be greatly extended by the use of this tane orm control. Accurately and smoothly places tone orm in record run-in groove and lifts arm off record at end of play. Ideal for "cueing." Designed to fit practically every known turntable arm supplied with both wood and metal mounting screws also supplied with adhesive mounting bose which eliminates drilling mounting holes.

M5-572 TONE ARM CONTROL ...

FLEXIBLE AUDIO CONNECTORS



onverting Sterea Player to Monoural. Can be used for In-Meter Monitor connection. Also required on some

(A) Phono Plug connected to 2 Phono Jocks by 4" shielded

SWITCHCRAFT 330F3

SHIELDED "Y" ADAPTERS



Completely shielded Y-Adapters with chaice of cannectors and terminations.

(E) Three RCA type phano jacks in parallel. MS-597

(F) Two RCA type phono locks in parallel to a standard phono plug.



nisture 2-input hi-impedance mike and phana mixers parate gain cantrals for mixing. Shielded hausing, Idea use with tape recorders, musical instruments, phana pphs, microphones. Size 2-1/6" x 1-13/16" x 1-1/16" graphs, microphones. Size 2-1/6" x 1-13/16" x 1-1-116".

320—Microphone connector inputs and outputs. Net 4.67

310—Phone jack inputs and phone plug output. Net 4.67

8266—Cable assembly with plug and jack to use No. 310 where equipment jack is recessed...Net 2.20

315—Phone jack inputs and microphone connector output ...Net 4.67

5—For recorders or amps using Jones connectors including recessed type in Webcor Tape Recorders Net

SWITCHCRAFT 665

A complete portable and compact stereo phonograph in one convenient cose. System uses the well-known Garrard RC-121/11 4-speed stereo changer which features true intermix of 12" and 10" records in any order with instant selection of either automatic or full manual operation. Uses a stereo turnover cartridge to play all your records—whether manual or stereo. Two powerful 10 watt amplifiers provide a frequency response of 50 to 12,000 cps. Controls included: Moster Volume; Remote speaker volume; Moster treble; Moster Boss. Detochable front speaker cabinet houses a 6" x 9" speaker with 19 ft, extension card. Main unit houses two speakers—ane 6" x 9" woofer and moin 4" tweeter. Phonograph has easy-grip handle on attractive smort-looking Pyroxylin covered cose. Size: 18½" togg, 15½" wide, 9" high. Shap, wt., 36½ bts.

PM-128 Complete Stereo phonograph with remate speaker.

SENSITIVE MINIATURE RELAY



\$2.95 ea. WHILE THEY LAST



Extremely small, bensitive relay — weighs only ½ azl Double-pole double-throw, with silver and silver-gold-platinum allay contacts. Contacts handle up to 100 valls at 300 ma. (30 watts). Coil measures 5300 ohms dc resistance-rated at 4.1 ma. dc. pull-in current, 0.95 ma. dc. drap-out. Enclosed in transparent plastic dust caver; Operating time 2.8 millisecs.; release time about 1.5 msecs. Breakdown voltage ratings: coil to frame, 500V.; contacts to frame 350V. Measures 1-1/16" x 11/16" x ½". Ideal for model tontral, photocell relay, carrier-current contral and dozens of other miniature applications. Shpg. wt., 4 az.

F-332—DPDT Miniature DC Relay

Net 2.95


SWITCHCRAFT STEREO AUDIO CABLES



shielded insulated cobles, (af different calar tones, for y identification of channels) inside a common chrome y plastic jacket, providing two completely isolated

TYPE	LENGTH		NET	
25FF25 36" 25FK25 6' 25FN25 10'		Phono Plugs at all ends.	1.91 2.20 2.65	
25FF84 25FK84 25FN84	36" 6' 10'	2 Phono Plugs at one end, other ends Stripped and Tinned	1.71 1.91 2.20	

SWITCHCRAFT AUDIO CONNECTORS AND ADAPTERS



(H) STEREO-MONAURAL SELECTOR

Pravides instant switching fram manaural ta Stereo. Two
Phono Jox input and two Phono Jox output. Attractive tan
housing is completely shielded and may be mounted on
cobinet. Supplied with mounting screws.

SWITCHCRAFT 661

Net 1.76


(1) STEREO-MONAURAL SELECTOR WITH REVERSE Same as Switchcraft 661 but with channel reverse feature. SWITCHCRAFT 662. Net 2.06

(J) SPEAKER PHASE CONTROL
Correct speaker phasing is essential in multiple or Stereo
Speaker installations. This completely shielded control is
ideal for this application. Attractively finished in tan with
easy to use screw terminals. Supplied with maunting hard-

Net 1.47

Save 331/3 to 50% on MINIATURE-TRANSISTOR & R/C Equipment

NEW! Lafayette's SUPER-TROL R/C EQUIPMENT



(A) RADIO CONTROL TRANSMITTER: Assembled-tested-guaranteed. No license examination required for operation. Crystal controlled for stability and to meet F.C.C. regulations. Uses powerful 3A5 tube for range of approximately one mile. Will operate any 27.255 mc R/C receiver. Overall dimensions only $8\frac{1}{2}$ " x $2\frac{3}{4}$ " x $1\frac{3}{4}$ " – just a handful! Includes antenna – tube – crystal – and instructions. Less Batteries. Shpg. wt., $2\frac{1}{4}$ ibs.

F-249 1.75 ea. Batterles required: Burgess U30 (3 needed)

Burgess #2 (1 needed) Batteries required: Burgess 030 (3 needed) ... 1.75 ea. Burgess #2 (1 needed) ... 1.75 ea.

(B) RADIO CONTROL RECEIVER: Completely wired and tested receiver – extremely sensitive and stable. Completely enclosed – ideal in boats – or case may be removed if desired, Ingeniously constructed to withstand vibration and shock. Features external fine tuning – antenna "snap" lead – plug for power and actuator connections. Ideal Companion for F-249 Transmitter and F-327 Servo shown elsewhere on this page. Requires one 1.5V battery and one 67.5 Volt battery. Size determined by use. Measures only 3" x 2¾" x 1½". Complete with tube and instructions. Less batteries. Shpg. wt., 8 oz.

F-208

Net 8.95 2.07 ep. Burgess No. 2 (1 needed)

SPECIAL COMBINATION OFFER

Consists of R/C Transmitter (F-249), and R/C Receiver (F-208) F-259 — Combination

Net 22.90



"JEWEL" REMOTE CONTROL RELAY

A natural far remate control receivers, it is highly sensitive, and built to withstand severe crashes. The smallest commercial job available, it weighs less than ½ az. Factory adjusted to pull in at 1.4 MA. drop out at 1.2 MA D.C. Single pole, double throw. Used In autstanding R/C receivers. 5,000 ohm cail. IMPORTED TO SAVE YOU MONEY.

P-260—Relay.

Net 2.75



NEW! MULTI-PURPOSE ELECTRIC SERVO MECHANISM

- . POWERFUL, MOTOR DRIVEN R/C ACTUATOR
- POSITIVE, INSTANTANEOUS ACTION

REMOTE CONTROL ESCAPEMENT . AT THE LOWEST PRICE ANYWHERE!

. FOR MODEL BOATS AND CARS

4.95

Lafayette's new, motor driven, remate control servo-mechanism. Imported by Lafayette to sell far half the price of any comparable unit! Corefully constructed far power, durability and rugged use. Operates with any single channel, remate control receiver and transmitter. When apecated at the prescribed 3 valls, the action is accurate and rapid. Provides for selective steering and automatic return to neutral. Extremely efficient when used with model boots or land vehicles. Hobbyists will find uses for the servo-mechanism restricted only by their imagination. Single pulse operation—electronic neutralization. Measures only 2½° x 2° x 1¾° averall. Includes instructions and linkage to extend actuator arm. Shpg. wt., 8 axs.

27.255 R/C CRYSTAL



Reg. 2.95 1.95

Specially manufactured for Lafayette. Designed specifically for use in R/C madel planes, boots, cars, etc. Low-drift — high output — dependable frequency control.' Tolerance .04% 13/16" wide x 7/16" deep x 11%" high obove plns. Pins on 1/2"

....Net eq. 1.95



MATCHING CRYSTAL SOCKET:

RETRACTS to 9 INCHES

WITH PLASTIC CASE

Made of special low lass phenalic. Easily mounts flush or stand-off, Small— light—rugged. miniature TELESCOPING ANTENNA

LAFAYETTE PNP AUDIO **TRANSISTOR**

SPECIAL! 59¢ MARGINE LINE

General audia type PNP transistar for experimenters and hobbyists, for code practice ascillators and similar small signal devices. In new JETC 30 welded case.

Net, singly, each 594 10 for 4.50, 50 for 19.50, 100 for 37.00

NEW! MOTOROLA POPULAR LOW COST 2N554 AUDIO POWER





- 40 WATT COLLECTOR DISSIPATION*
- 2 WATT CLASS A OUTPUT •

FREE with each 2N554 New Motorola Circuit Applications folder on MOW TO BUILD A TRANSISTORIZED AUDIO POWER AMPLIFIER, Power Control, Bottery Charger, Model Power Supply, Model Train Control, Toy Electronic Organ, Geiger Counter and DC to DC Converter.

* With Meat Sink

MK-10 Power transistor mounting kit with teflor coated fiberglass Insulating washer. Net .25 coated fiberglass Insulating wasner.

MK-15 Same as above, but with mice insulating washer.

Net .25

MK-20 As above, but with anadized aluminum insulating

A sturdy 2 arm self-neutrolizing escapement. Campletely wired (not a kit). Converts electrical impulses from remote control receiver to mechanical motion for varying movement of plane, boot, or car. Four 90° rotations—two by armoture activation, two by neutralization. Mas rathest governor for mointaining foolproof rotating speed. Weighs only 7/8 az. Size: 1-3/8" L x 2" W overall. Shpg. wt., 5 oz.

REMOTE ENGINE CONTROL ESCAPEMENT Lafayette's exciting new air-bleed self-neutralizing remale engine control. Varies engine speed of your model. Neutral position of one arm is law speed, neutral position of 2nd arm is high speed, and maintained activated position of either arm (armature activated stops motor. Perfect mate for Lafayette F-256. Compoct and weighs only 3/4 az. Requires 1-1/2 volt battery. Low current drain. Size: 1-5/8" x 1" x-3/4". Shag, wt., 5 az.



. NO NEED TO WORRY ABOUT LOSING YOUR MODEL!

You have no sequence of operation to worry about 1 Simple as A B Ct. One pulse always gives right turn, two pulses always gives left turn. Three pulses closes the circuit for the supplementary control such as motor (F-287) or elevator, if used. The rudder always returns to neutral position after any turn as soon as transmitter keying button is released. With ratchet governor for foolproof operation. Sturdy construction—low current drain. Uses 1-1/2 valt battery. Weighs 1-1/8 az. Size: 2-7/8" L x 1-9/16" averalt. Shop. wt., 6 az.

POWER TRANSISTORS



Reg. Value 1.35

EACH UNIT FACTORY TESTED TO MEET SPECIFICATIONS

> EQUIVALENT TO: CBS 2N256 SYLVANIA 2N307 MOTOROLA 2N554

GENERAL PURPOSE DIODES

2.59

1N38A

1N69



Each

EXCELLENT DETECTOR FOR TRANSISTOR AND VACUUM TUBE RADIO RECEIVERS EQUIVALENT TO:

1N34 1N48

1N34A

1N56

SP-148 General Purpose Diode Net .29 each

NEW POWER TRANSISTOR AUDIO TRANSFORMERS

. DESIGNED FOR HIGH OUTPUT TRANSISTORS

- USED IN AUTO RADIOS PA SYSTEMS INTERCOMS ETC, OUTPUT TRANSFORMER

Rated 6 wotts. Frequency respanse 70 to 20,000 cycles ± 2 db. Primary impedance 48 ahms center topped. Secondary, 3.2 ahms. Primary DC resistance 1.1 ahms, second ory 0.3 ahms. Unbalanced primary current 500 ma DC. Size 1.9/16" x 1%" x 1.9/16" Shpg. wt., 1 lb.

Net 1.75

INPUT TRANSFORMER

Rated 2 waits. Frequency response 70 to 20,000 cps ± 2 db. Primary impedance 100 ahms. Secondary impedance 200 ahms CT. Primary DC resistance 1.8 ahms, secondary 2 ahms. Unbalanced primary current, 200 ma DC. Size 1-9/16" x 1½" x 1-9/16". Shpg. wt., 1 lb.

. DESIGNED FOR THE EXPERIMENTER

- NEW! UNIVERSAL POWER TRANSISTOR OUTPUT TRANSFORMER
- PRI. TAPPED AT 8-12-16-24-32 AND 48 OHMS
- . RATED 10 WATTS

Lofayette's lotest transistor circuit component. Engineered for construction projects using the Increasingly popular power transistors. Will also serve as a general replacement for many transistorized outs radios. Roted at 10 worts for push-pull operation, Primary topped of 8, 12, 16, 24, 32 and 48 ahms. Secondary topped at 4, 8 and 16 ahms. Sizes 3-1/16" x 21/4" x 2-9/16". Shop. wt., 3 lbs.


NEW! LAFAYETTE 27.255 MC CITIZEN BAND REMOTE CONTROL TRANSMITTER KIT KT-127

- WAY OVER 1 MILE LINE OF SIGHT TRANSMISSION!
- SUPER STABILITY FOR FOOLPROOF CONTROL OF MODEL PLANES, BOATS AND CARS.

Once again Lafayette spurts into the lead with its new amazing RC CITIZENS BAND TRANSMITTER. You'll marvel at the neathers and simplicity of its layout and at the dependability of its crystal controlled circuit. Fits comfortably in the polm of your hand—yet is so stable that it is unaffected by hand capacitance or motion. Mas new attractive wide-scale meter for visually tuning transmitter for aptimum faalproof performance. Has wide, nan-critical tuning. Uses one B & W prewound coil—na tedious winding of caits! Tuning for maximum autiput and antenna loading adjustment easily performed from exterior of cabinet. Camplete with approved telescoping antenna, meter, cabinet, chassis, tube, crystal, alignment tool, all parts and easy step-by-step instructions. FCC forms for exam-free permit enclaved with kit. Size 10" x 4" x 2½". Shpg. wt., 5 lbs.

- KT-127, Less Batteries 1 Burgess No. 2 (RCA VS036)
 8 attery Not -13
- 2 Burgess P45 (RCA VS218) Bottery @ 2.17







As . 98

COPPER CLAD LAMINATE AT LAFAYETTE'S LOW PRICES!

NO.	DESCRIPTION	NET
MS-510 MS-511	XXXP Copper Lam.—1 side—9"x17".	1.50
MS-512 MS-513	XXXP Copper Lam.—1 side—3"x XXXP Copper Lam.—1 side—2"x	
M5-514 M5-515	XXXP Copper Lom.—1 side—3"x XXXP Copper Lom.—2 sides—9"x12"	1,75
M5-516 M5-517	XXXP Copper Lom2 sides -6" x41/1" XXXP Copper Lom2 sides -3" x41/1"	.60
M5-518 M5-519	XXXP Copper Lam.—2 sides—2"x41/1" XXXP Copper Lam.—2 sides—3"x21/4"	.30

PLASTIC CASE FOR MINIATURE **EQUIPMENT**



Beautiful pocket sized modern atreamilined case with rounded corners and removable snap-on cover. This is an ideal case for that transistorized receiver—or other miniature or subminiature preamplifier, amplifier, oscillator or transmitter. Two pre-drilled apertures, a 2½" dilameter opening ideal for volume control and switch. In addition, there are two small openings on the side for such internal leads as antenna or earphone. Experimenters, builders and hobbysits will want to stock up on several of these cases at this low bargain price. Size: 4½" x 2½" x 1½". Shpg. wt., 6 oz.

Net 95c.

NEW! Lafayette Super-Value Sun Battery



QUANTITY LIMITED!

Senstional buy enables Lafayette to offer this famous selentum photocell at a small fraction of its narmal price! Approx. 8 MA current output at 100 ft. candles with 55 ohms load! 5 volts apen circuit vallage in au sunlight. 30 MW power output at 100 ft. candles with 1000 ohm load! Truly a super buy for the experimenter, kit builder, etc. With colored pigtail leads. 1 ½" diam. MS-543

Net 1.47 QUANTITY LIMITED!

TRANSISTOR OUTPUT TRANSFORMER



Only %" x %" x 1-1/16". 2000 ohm primary to 10 ohm voice coil. Matches most transistor outputs. Shpg. wt., 8 ozs. Net 69'

SUPER MICRO-MOTORS

- . HALF THE WEIGHT-TWICE THE POWER!
- HIGHER SPEED-LOWER DRAINI
- · PERMANENTLY LUBRICATED
- DOUBLE PERMANENT FERRITE MAGNETS

Expertly usigned, miniature, D.C. permanent magnet maters. Ruggedized construction for industrial use. Highest power and speed to weight ratio of any miniature motor makes these a "notural" for mades and remate control applications. Ferrite magnets preclude possibility of demognetization and after minimum weight. Unique, precision formed device permanently center commutator in precise position. Utilizes phosphor-bronze brushes and brass sleeve bearings. May be mounted by means of mater mount supplied or by means of tapped hale in mater case. Avg. Shpg. wt., 4 oz. Complete with leads. Shoft diameter 3/32"

Stock Vott. Orein No. Beans Avg. Shop. No. Next LLOTS

F-403 1.5-4.5 200-300 5000-6000 1 " 1 1 1 1 1 1 1 1 1 1 2 1 2 1 0 2 2 1 1 1 0 0 2 1 1 1 1	No.	Renge	Ma.	RPM	H.	w.	L	Wt.	EA.	EA.
	F-403	1 5.4 5	200.300	5000,6000	1 "	11/4"	11/. "	11/4 02	49	.62

SERVICEMEN AND DEALERS! LOOK AT THESE PRICES!

LAFAYETTE WIRED TEST EQUIPMENT

SENSATIONAL VALUES AT LESS THAN THE PRICE OF KITS!

● SWEEP RANGE 3MC-260 MC ● MARKER RANGE 3MC-225MC CRYSTAL CALIBRATION OF BOTH SWEEP AND MARKER COMBINATION CRYSTAL AND VARIABLE MARKER-1 % ACCURATE!

precision instrument that incorporates in a single unit both TV-FM sweep and crystal marker generators with all the features required for accurate alignment of IF and RF stages of TV and FM receivers. Covers 3MC-260MC in 2 bands. Sweep width is continuously variable from 0-12MC or more. 3 volts RMS, 60 cycle sine wave horizontal sweep voltage available from front panel. The marker covers 3MC-225MC in 4 overlapping ranges. Marker calibration is accurate to better than 1%. The 4.5MC crystal supplied mounts on front panel socket and is accurate to 0.002%. RF output is over 100,000 microvalts and is controlled by the 3 step (X1 X10, X100) attenuation and the continuously variable fine adjustment control. Output impedance is 75 ahms, unbalanced. Cantrols are sweep width, horizontal phase, electronic retrace blanking with off position, marker amplifier, RF output 3 step multiplier, RF autput fine adjustment, sweep range selector switch and marker range selector switch. Crystal socket, pilot light and external marker input are also on front panel. Other features include two 5" easy-ta-read dials and vernier driven dial painters. Sturdy gray wrinkle metal cabinet, Convenient handle. Size 9" x 131/2" x 6". Shpg. wt., 20 lbs. Net 79.50 MODEL LSG-50



SPECIAL PRICE

Limited

Completely Factory Wired and Tested



Wew! MINIATURE POCKET MULTITESTER

17.50

- 20,000 Ω/v DC SENSITIVITY
- . 10,000 Ω/V AC SENSITIVITY
- 1% RESISTORS
- . WEIGHS ONLY 10 OZ.
- . 38 MA MOVEMENT
- 23 RANGES
- . COMPLETELY WIRED

20,000 OHM PER VOLT MULTITESTER SEMI-KIT



THE DIFFICULT WORK IS ALREADY DONE



ONLY . 10,000 OHMS PER VOLT AC 4D MICROAMPERE 3" D'ARSONVAL METER MOVEMENT

The semi-kit is a new concept in test equipment kits. All the important or difficult parts are already mounted. All that remains to be done is to mount and wire in a few small parts — a job so simple you'll finish before you realize it, and best of all, you'll have one of the finest high sensitivity multitesters on the market. When used in a circuit, the high input resistance on all DC and AC ranges does away with the highly inaccurate readings

common to law resistance testers which load the circuit. Ronges: DC Volts, 0-10-50-250-500-1000; AC Volts, 0-10-50-250-500-1000; DC CURRENT, 0-500 uo, 0-10-250 ma; OHMS, 0-10K-100K-1 meg; DECIBELS, -20 to +36; PLUS 0.5000 henries and 250 mmf. to .02 mfd. Black case 53/4" x 33/4" x 17/8". Complete with test leads, all parts, and instructions and battery. Shpg. wt. 3 lbs.

TK-10 KIT

A terrific bargain in an all-round extra sensitive multimeter. Here is the ideal all-purpose multitester for traubleshooting anything electrical or electronic — can be used for repairing automobile wiring, checking ordinary household appliances, such as irons, heaters, and maters; troubleshooting complex electronic equipment in the hame, in the shap or in the field. Ideal for TV sets, hame radias, high-fidelity sets, amateur gear, commercial communications equipment — wherever a truly partable unit is required. This is a completely wired precision instrument, NOT A KIT. Uses a sensitive, rugged 38 microampere basic meter, a d'Arsanvol movement with jewelled bearings providing easy, accurate read-off from its large, clear scales. 21/3" meter face. 1% precision resistars guarantee tap-natch accuracy. This unit weighs only 10 az., measures only 41/8" x 21/8" x 11/4" - fits into packet without bulging, without weighing down. The entire front is protected by a thick, clear sheet of plastic, preventing scratching

and eradicating of switch markings, protecting your meter and preserving its appearance. Single selector switch with positive detents and clearly marked positions permits anehanded operation. Recessed, break-proof zero-ahms knob permits easy adjustment, yet cannot be braken even under rough handling.

Has 23 ranges at the unusually high sensitivities of 20,000 ahms per valt DC, 10,000 ahms per valt AC. DC Valts, 0-5-25-100-500-1000; AC Volts, 0-5-25-100-500-1000; OHMS; 0-6 K-600K-6 Meg-60 Meg; DC MILLIAMPERES, 0-.05 (50 microamps) -5-50-500; DECIBELS, -20 to +64

Truly p superb instrument for any application. Complete with 1.5 valt and 15 valt batteries, and vinyl insulated flexible test leads. Shpg. wt. 1 fb.

AR-660 MINIATURE POCHET VOM

Net 17.50

THRE TESTER!

COMPLETELY WIRED - NOT A KIT . MOST ADVANCED ENGINEERING TO FIT SERVICEMAN'S



A new streamlined tube tester with a realistic approach to the problem of quickly testing the ever increasing number of tube types. It incorporates new and advanced engineering features and all at a price of about half of even the most ordinary tube tester. Read these Specifications.

"FREE POINT" ELEMENT SELECTOR SWITCH-ING: Newly designed, it reduces possibility of obsolescence to a minimum because any pin may be used as a filament pin and voltage applied between it and any other pin, or even the "top cap" Tubes with tapped filaments or with filaments terminating in more than I pin are truly tested.

MULTIPURPOSE TUBES: Special isolating circuit allow each section of multi-purpose tubes to be tested individually as if it were in a separate

SMORTS AND LEAKAGES: Supersensitive method checks shorts and leakages up to 5 megohm between any and ALL elements: continuity between various sections individually

HIGH SENSITIVITY MULTITESTER 20,000 OHM PER VOLT DC OHM PER VOLT AC



LOOK AT THESE FULL SCALE RANGES! P.C. Volts: 0-6; 0-30; 0-120; 0-600; 0-1200; 6000 Volts - A.C. VOLTS: 0-6; 0-30; 0-120; 0-600; 0-1200 Volts - RESIS-TANCE: 0-10K; 0-100K; 0-1 Meg; 0-10 Megohms-D.C. CURRENT: 0-00 Micromp; 0-6; 0-60; 0-600 omp; U-0; U-000 Milliamps — 0EC18EL: 20 to 17 db (0 db = 0.774V) — CAPACITY: .0001-.01; .005-.15 mfd _ (NDUC-TANCE: 20-2000 henries -OUTPUT RANGES: 0-6: 0-30; 0-120; 0-600; 0-1200 Volts

The new Lafayette high sensi-tivity Multitester is a complete ment (not a kit). In ad-its unusual sensitivity OHMS PER VOLT

EDGE-WISE PANEL METERS



- 2% FULL SCALE ACCURACY
- PRECISION D'ARSONVAL MOVEMENTS
- FRONT PANEL AREA ONLY 31/4 x 1"

Precision D'Arsonval meters with 2% or better full scale occuracy. Front panel dimension is 31/4 x 1". Overall depth is 31/2" behind panel including terminals. Zero adjust screw. Shpg. wt., 1/4 lbs.

VU METER-Collbroted and damped in accordance with standard VU meter practice. Upper scale reads -20 to +3 VU. Lower scale reads 0-100% modulation. Accu-VII from 30-15,000 cps.

Net 5.95 eve heidne rectifier two

LAFAYETTE is your HEADQUARTERS for TW ANTENNAS AND ACCESSOR



Best antenna deal yet for servicemen-dealer-and installation specialists. All the most wanted features. Quickest-easiest installation passible. No loose hardware. All elements snop open and lack in without tools. Most efficient conical design for all

AN-43-Via Express only. Shpg. wt., 18 lbs.

FAMOUS BRAND Color 'Tenna

PRICE BREAK - Over 50% Off!

LIST 29.95

SALE 13.95!

Gold Anodized

- High Gain On All VHF Channels
- Completely Factory Preassembled
- Electronic Lens Design
- Highly Directional Yagi Performance

Lafayette is the FIRST to affer this nationally tried and proven antenna at close to 25% off the regular dealer price. This is the same fine antennawith all its exclusive features—that sells for dollars more than our record-breaking price. Check these features: Electronic Focussing-Migh Gain-all VHF channel coverage-anadized quality construction-easiest installation—autstanding fringe area reception—compact design dynamically bolonced. All-aluminum construction-automatic hardware. Shpg. wt., 8 Ibs. Via Express only.

AN-51 List 29.95

Net ea. in lots of 3, 13.25

Complete Kit of AN-51 antenna plus AM-12 mtg, kit as shawn. Shop, wt.,

"I-INSTALL-IT"



All the accessory items necessary to do a quick, easy installation from roof to receiver! You get on all angle roof mount-lightning arrestor-75 feet of 300 ohm twin lead-6 insulated screw eves-2 insulated most standaffs and a 5 ft., 11/4 OD steel mast. Shpg. wt.,

AM-10..eo, 2.95 Lots of 3, eo...2.85 AM-11 with 2-5 ft. mosts. Shpg. wt., 10 lbs. Singly, 3.55 Lots of 3, eq. 3.35 AM-12-Same as AM-10 but with chimney mount. Ea. 3.25 Lats of 3, ea. 3.15 LAFAYETTE LEADER KITS




8 Element Canical (A): All-aluminum 8 element conical. Full sized. Rugged in: 3 Section Indoor Antenna (a): Adjustsulator black. Designed for rapid assembly. Fan frant af 6 full length elements. Real value. Shog. wt., 4 lbs. AN-11... Singly, ea. 2.60 Lats of 3, ea... 2.40
"U-Install-1+" Kit: Includes AN-11 and roof-mount kit as shown with one 5 ft. mast. Lats af 3, ea......2.40 ...Net 4.95

Net 5.50 Vee Beam (8): Popular primary area antenna, Rugged aluminum construction, Light

SPECIAL TUBULAR AIR-SPACE



LEADER INDOOR ANTENNAS



able indoor antenna. 3 section aluminum staffs. Heavy, crackle finish bose. Com-plete with 300r twin lead. Shpg. wt.. 21/2 lbs. AN-12Singly, eq. 1.15 In lots of 3, eq. .99

Switch Type Indoor Antenno (b): Indoor-6 position switch and crisscross



snaps open and locks in. Dual insulaelements. All aluminum construction. • THE MAXIMUM ANTENNA FOR YOUR AREA. Single bay, Less most. Shoe, Wt., · MAXIMUM CONSTR

SERVICEMEN AND DEALERS! LOOK AT THESE PRICES!

LAFAYETTE WIRED TEST EQUIPMENT SENSATIONAL VALUES AT LESS THAN THE PRICE OF KITS!

TV-FM SWEEP-MARKER-ALIGNMENT GENERATOR

SWEEP RANGE 3MC-260 MC MARKER RANGE 3MC-225MC CRYSTAL CALIBRATION OF BOTH SWEEP AND MARKER COMBINATION CRYSTAL AND VARIABLE MARKER—1 % ACCURATE!

A precision instrument that incorporates in a single unit both TV-FM sweep and crystal marker generators with all the features required for accurate alignment of IF and RF stages of TV and FM receivers. Covers 3MC-260MC in 2 bands. Sweep width is continuously variable from 0-12MC or more. 3 valls RMS, 60 cycle sine wave horizontal sweep voltage available from front panel. The marker covers 3MC-225MC in 4 averlapping ranges. Marker calibration is accurate to better than 1%. The 4.5MC crystal supplied maunts an front ponel sacket and is accurate to 0.002%. RF autput is over 100,000 microvalts and is controlled by the 3 step [XI]. X10, X100) attenuation and the continuously variable fine adjustment control. Output impedance is 75 ahms, unbalanced. Controls are sweep width, horizontal phase, electronic retrace blanking with off position, marker amplifier, RF autput 3 step multiplier, R autput tine adjustment, sweep range selector switch and marker range selector switch. Crystal socket, pilat light and external marker input are also an front panel. Other features include two 5" easy-to-read dials and vernier driven dial painters. Sturdy gray winkle metal cabinet. Convenient handle. Size 9" x 13", x 6". Shpg. wt., 20 lbs.

Net 79.50



Factory Wired and Tested



Wew! MINIATURE POCKET MULTITESTER

ONLY

- 20,000 Ω/ν DC SENSITIVITY • 10,000 €/v AC SENSITIVITY
- . 1% RESISTORS
- . WEIGHS ONLY 10 oz.
- . 38 AA MOVEMENT
- . 23 RANGES . COMPLETELY WIREO

A terrific bargain in an all-round extra sensitive multimeter. Here is the ideal all-purpose multitester for trauble-shooting anything electrical or electrants — can be used for repairing automabile wiring, checking ardinary house-hald appliances, such as irons, heaters, and mators; traubleshooting complex electronic equipment in the hame, in the shop or in the field. Ideal for TV sets, hame radios, high-fidelity sets, amaleur gear, commercial communications equipment — wherever a truty partable unit is required. This is a completely wired precision instrument, NOT A KIT. Uses a tensitive, ragged 38 microampere basic meter, a d'Arsanval mavement with jewelled bearings providing easy, accurate read-off from its large, clear scales. 2½ "meter face. 1% precision resistors guarantee top-notch accuracy. This unit weighs only 10 az., measures only 4½ "x 2½" x 1½" — fits into packet without bulging, without weighing down. The entire front is protected by a thick, clear sheet of plastic, preventing scrotching

and eradicating of switch markings, protecting your meter and preserving its appearance. Single selector switch with positive desents and clearly marked positions permits ane-handed operation. Recessed, break-proof zero-ahms knob permits easy adjustment, yet cannot be braken even under rough handling.

Has 23 ranges at the unusually high sensitivities of 20,000 ahms per valt DC, 10,000 ahms per valt AC, DC Valts, 0.5:25-100-500-1000; AC Valts, 0.5:25-100-500-1000 OHMS; 0.6 K-600K-6 Meg-60 Meg; DC MILLIAMPERES, 0.05 (30 microamps) .5-50-500; DECIBELS, .20 to +64 in 5 ranges.

Truly p superb instrument for any application. Complete with 1.5 valt and 15 valt batteries, and vinyl insulated flexible test leads. Shap, wt. 1 (b. AR-660 MINIATURE POCKET VOM

20,000 OHM PER VOLT MULTITESTER SEMI-KIT A New Kind THE DIFFICULT WORK IS

ALREADY DONE . 20,000 OHMS PER VOLT DC

SERVICEMAN'S

NEEDS

ONLY • 10,000 OHMS PER VOLT AC 11.95

The semi-kit is a new cancept in test equipment kits. All the important or difficult parts are already maunted. All that remains to be done is to mount and wire in a few small parts — a job sa simple you'll finish before you realize it, and best of all, you'll have one of the finest high sensitivity multitesters on the market. When used in a circuit, the high input resistance on all DC and AC ranges does away with the highly inaccurate readings.

A LAFAYETTE SPECIAL

COMPLETELY WIRED - NOT A KIT

. MOST ADVANCED ENGINEERING TO FIT

TUBE TESTER

common to low resistance testers which load the circuit. Ranges: DC Valts, 0-10-50-250-500-1000, AC Valts, 0-10-50-250-500-1000, AC Valts, 0-10-50-60-250-500-1000, DC UURRENT, 0-500 ua, 0-10-250 mC UMAS, 0-10K-100K-1 meg; DECIBELS, -20 to +36; PLUS 0-5000 henries and 250 mmf. to .02 mtd. Black case 53/4 x a 3/4 x a 1/8; Complete with test leads, all ports, and instructions and bottery. Shaps, wt. 3 lbs.
TK-10 KIT.

TK-10 KIT A new streamlined tube tester with a realistic approach to the problem of quickly testing the ever increasing number of tube types. It incorporates new and advanced engineering features and all at a price of about half of even the most ordinary tube tester. Read these Specifications.

SHORTS AND LEAKAGES: Supersensitive method checks shorts and leakages up to 5 megohm between any and ALL elements: continuity between vertices sectic grow bigelly indicated.

Verma secret plog attent indicated.

SIMPLICITY: "pre operation. The 4 position fast action snap switches are all numbered in exact accord with RMA standards. Thus when testing elament terminating in pin No. 7 of a tube you use button No. 7. You can't insert a tube in the wrong' socket—there's one for each type of tube Base.

TUBE TYPES: Tests all octal, loctal, 7 pin miniatures, 9 pin miniatures as well as the new noval and Sub-Minar types. Old type sockets used for testing obsolete types—that you rarely see anymore—have been eliminated.

Type Tester, Read these Specifications.

"FREE POINT" ELEMENT SELECTOR SWITCH-ING: Newly designed, it reduces possibility of obtolescence to a minimum because any pin may be used as a filament pin and voltage applied between it and enty other pin, or even the "top cap". Tubes with tapped filaments or with filaments terminating in more than 1 pin are truly tested.

MULTIPUEPOSE TUBES: Special location circuit ministry in more than I pin are truly retred.

MULTIPURPOSE TUBES: Special isolating circuit
allow each section of multi-purpose tubes to be
tested individually as if it were in a separate

SIZE: A practical size to carry with you as well as for use in the shop—only \$\mathbb{V}_2 \times 6\mathbb{V}_3 \times 2\mathbb{V}_4^* deep.

Shop, Wt. 5 lbs.

MODEL TO-55—complete with carrying case and instructions.

26.95

HIGH SENSITIVITY MULTITESTER 20,000 OHM PER VOLT DC 10,000 OHM PER VOLT AC



LOOK AT THESE

FULL SCALE RANGES!

P.C. Volts: 0.6; 0.30; 0.
120; 0.600; 0.1200; 0.
6000 Volts: — A.C. VOLTS:
0.6; 0.30; 0.120; 0.600;
0.1200 Volts: — RESISTANCE: 0.100K; 0.100K;
0.1 Meg; 0.10 Megahms—
D.C. CURRENT: 0.60 Microomp; 0.6; 0.60; 0.600

MIIIIomps: — DECIBES: — 20

To 4: 7 db (0 db—0.7744)

— CAPACITY: 0.001.01;
0.05:.15 mfd — INDUCTANCE: 20-2000 henries
— OUTPUT RANGES: 0.6;
0.30; 0.120; 0.600;
1200 Volts

The new Laffsyette high sensitivity of the properties of the Resistant of the Resistant

LOOK AT THESE

tion to its unusual sensitivity
20,000 OHMS PER VOLT
N D.C. AND 10,000 OHMS
R VOLT ON A.C., and the
traordinary number and scope

estraordinary number account at least twice as much if made in this country 1.7c precision resistors, silver contacts on selector. State leads are heavy duty with high voltage insulation age source required for low capacity range is 120 V A. high range capacity and inductance scale in 6V A.C. tive plastic front with metal bistom. Size 614, "8.44" Complete with batteries and leads, Shipping weight 4 RW-30A

EDGE-WISE PANEL METERS



- 2% FULL SCALE ACCURACY
- PRECISION D'ARSONVAL MOVEMENTS
- FRONT PANEL AREA ONLY 31/4 x 1"

Precision D'Arsonvol meters with 2% or better full scale occuracy. Front panel dimension is 3% x 1". Overall depth is 3%" behind panel including terminals. Zero adjust screw. Shpp. wt., % lbs.
VU METER—Colibrated and damped in accordance with standard VU meter practice. Upper scale reads —20 to —3 VU, Lawer scale reads 0.100% modulation. Accurate to —0.5 VU from 30.15,000 cps.
TM-23

0.1 DC MILLIAMMETER-CALIBRATED from 0 4

Net 5.69

FAMOUS RCA VOLTOHMYST IN KIT FORM



29.95! 49.95

Wired

3.00 DOWN

BURNOUT-PROOFI
28 RANGES

■ 78 RANGES

■ FAMED WY-77E VOLTOHMYST VTVM

■ ± 3% ACCURACY ON DC

■ RESPONSE ± 5% 40 CPS to 5 MC.

■ DC INPUT 11 MEG.

This new kit makes possible substantial savings in a high quality vacuum-tube valtmeter. Its 28 ionges include 7 DC voltages: 0.1.5, 5, 15, 50, 150, 500, 1500, with \$\precedot{\precedot{\precedot{28}}} of full scale occuracy ond input resistance of 11 megahms; 7 mms AC valtages: 0.1.5, 5, 15, 50, 150, 500, 1500, with \$\precedot{\precedot{28}} \precedot{\precedot{28}} of full scale occuracy; 7 peok-to-peok AC valtages: 0.4, 14, 40, 140, 400, 1400, 4000 valts, with 5% oges: 0.4, 14, 40, 140, 400, 1400, 4000 valts. ± 5% of full scale occuracy; 7 peak-to-peak AC voltages: 0-4, 14, 40, 140, 400, 1400, 4000 volts, with 5% occuracy; 7 overlapping ahms ranges from 0.2 ahms to 1000 megahms with center-scale values of 10, 100, 1000, 10K, 100K, 1 meg, and 10 meg, ahms. Other important features include zero-center for discriminator alignment; frequency response of 40 cps to 5 mc, flot to within ± 5% on the 1.5 to 15 volt rms and 4 to 40 volt p-to-pronges; 1% deposited-corbon resistors; meter electronically protected against burnaut and other scales color coded to match range switch, thielded by metal cose; and etched front-ponel lettering. Tubes are 6ALS and 12AUT. Power requirement is 5 watts by 105-125 v., 50-60 cps AC and 8035 battery. Supplied complete with DC and AC/ohms probes and cobles and ground leads, battery, and instruction book. Shpp. wt., 5% bs.

RCA WV-77E(K) Voltohmyst Kil ...

WV-77E Same, completely wired and foctory-calibrated Net 49.95

HIGH QUALITY D'ARSONVAL MOVEMENTS

SQUARE PANEL METERS



ACCURACY 2 % OF FULL SCALE
3 % " SQ., ONLY 1-5/16" OVERALL BEHIND
PANEL • BAKELITE CASES • JEWELLED BEARINGS

Migh quolity, precision built meters with better than 2% of full scale occuracy. 3½ square, 2-5/16" in 1½ dialoces, 1-11/16" averall depth, 1-5/16" behind panel including terminals. Require 2-9/16" diameter mounting hole. ½" screw terminals plus salder lugs, 4 threaded mounting studs in carners. Zero adjust screw. Shpg. wt., 1 th.

1 lb.

ILLUMINATED SCALE VU METER

ILLUMINATED SCALE VU METER — Standard 3900 ohm

B scale volume indicator calibrated and damped in accordance with standard VU meter practice. Upper scale reads 0.100% modulation, lower scale reads — 20 to † 3 VU (0 VU carresponds to 100%) Accurate to *0.2 VU from 35.1000 cps. *0.5 VU from 30.15,000 cps. VU from 30.1000 cps. within 0.3 seconds; overshoot beyond carrect reading within 0.3 seconds; overshoot beyond correct reading within 0.3 seconds; overshoot beyond correct reading is 1 to 1½%. A root-mean-source instrument with full wave bridge rectifier. Includes built-in 6-8 volt bulb. Complete with instructions.

TM-8D Net 7.50

0-50 DC MICROAMMETER

-0.50 DC MICROAMMETER — Highly damped, sensitive movement, calibrated in 50 one-microamp linear scale divisions. Cushioned ceromic bumpers protect pointer against overtravel and damage with moderate overloads. 0-1 DC MILLIAMETER

movement, Linear calibrations in 02 ma, divisions, Black

0-150 AC VOLTMETER
0-150 AC VOLTMETER
1000 ohms per volt With precision corbon-film multiplier resistor. 5 volts per division, linear scale.

METER RECTIFIER

A brond new, economical meter restifier of exceptionally linear characteristics. This full wave restifier is specially designed so universal replacement for all modern multimeters, such as Lofayetle's miniature V.O.M.'s. Simple to install, mounts with single screw. Long terminals facilitate easy connection.

RE-22

Nel .45

uick-octing bosis

TM-300 TM-301



D'ARSONVAL MOVEMENTS

BAKELITE CASES . JEWELLED BEARINGS ONLY 1-9/16 SQ. FACES, 11/4" OVERALL BEHIND PANEL • ACCURACY 2 % OF FULL SCALE

UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUALITY! Ruggedly built minioture panel meters, with excellent occuracy. 11/2" diol foces, with silvered diols and block numerols and painters. Accuracy 2% of full scale. 1-9-16" square fronts, 11/2" overall front-to-back, with 11/2" behind panel including 1/2" terminals. Require 11/2" diameter round hole in panel; 4 carrier holes for mounting, with 11/2" centers. Terminal palarity on DC madels clearly marked. Screw terminals. Zero adjustment screw on front of panel. Clear optical aloss fronts. Shap, wt. 8 az VU METER.

VU METER — Volume level indicator, colibrated in standard 20 to +3 VU and 0-100% ranges. Uses precision carbon film multiplier resistor and full wave rectifier. Damped in occordance with standard VU meter requirements. Reference level 1 mw in 600 ahm tine. 10,000 ahm internal resistance. "O" VU is 1.25 valts sine wave AC across meter cannected to 600 ahm source with 600 ahm load. May be used with 1-pad attenuator. 0-100% scale used to indicate percent use of transmitter auty. UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUAL

TM-10




DC MILLIAMMETERS MILLIAMPERES MILLIAMPERES MILLIAMPERES 0-1 DC 0-5 DC 0-50 DC 0-100 DC MILLIAMPERES DC MICROAMMETER 0-50 DC AMMETERS MICKOAMPERES FM-200 50-0-50 DC AMPERES 0 10 DC AMPERES R. F. AMMETER TM-500 VOLTMETERS



LAFAYETTE is your HEADQUARTERS for TW ANTENNAS AND



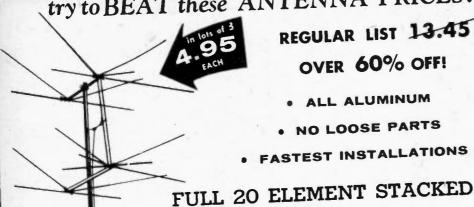

REGULAR LIST 13.45 OVER 60% OFF!

- ALL ALUMINUM
- NO LOOSE PARTS
- FASTEST INSTALLATIONS

SINGLY EACH

5.25

Snap Open Conical

Best antenno deal yet for servicemen dealer and installation specialists. All the most wanted features. Quickest easiest installation possible. No loose hardware. All elements snap open and lock in without tools. Most efficient canical design for all reception areas. Twa camplete bays with Q bars, less mast. Shpp. wt., 8 lbs. Via Express only.

AN-28—Singly, ea.

"U-INSTALL-IT" KIT With All Angle Raaf Mounts. Includes AN-28 antenna and installation Kit as shown with two 5 ft.

AN-32—Via Express only, Shpg. wt., 18 lbs.

"U-INSTALL-IT" KIT With Chimney Maunt, Same antenna and accessories but includes chimney maunt instead af roof maunt, Net 8.75

AN-43—Via Express only, Shpg. wt., 18 lbs.

FAMOUS BRAND Color 'Tenna

PRICE BREAK - Over 50% Off!

LIST 29.95

SALE 13.95!

Gold Anodized

- High Gain On All VHF Channels
- Completely Factory Preassembled
- **Electronic Lens Design**
- Highly Directional Yagi Performance

unigniy Directional — Tagl Performance

Lafayette is the FIRST to offer this nationally tried and proven antenna at close to 25% off the regular dealer price. This is the same fine antenna—with all its exclusive features—that sells far dollors more than our record-breaking price. Check these features: Electronic Focussing—High Gain—all VHF channel coverage—anodized quality construction—easiest installation—autstanding fringe area reception—compact design dynamically balanced. All-aluminum canstruction—automatic hardware. Shpg. wt., 8 lbs. Vio Express only.

AN-51 List 29.95 mplete Kit of AN-51 antenna plus AM-12 mtg. kit as shawn, Shpg. wt.,

"U-INSTALL-IT"



a quick, easy installation from roof to maunt—lightning arrestor—75 feet of 300 ohm twin lead—6 insulated screw -2 insulated most standoffs and a 5 ft., 11/4 OD steel most. Shpg. wt., 7 lbs.

AM-10.ea. 2.95 Lats of 3. ea...2.85 AM-11 with 2—5 ft, mosts. Shpg, wt., 10 lbs. Singly, 3.55 Lats af 3, ea. 3.35 AM-12—Same as AM-10 but with chimney mount. Ea. 3.25 Lats of 3, ea. 3.15 AM-13—Same as AM-11 but with chimney mount. Ea. 3.85 Lots of 3, ea. 3.75

NEW WUERTH SURGISTOR

Designed to prolong tube life in TV

pesigned to protong tube life in 1 procedures. Connect directly into the power line circuit of electronic devices. Protects tube filaments, electrolytics, rectifiers, etc. from destructive surge voltages and currents. Starting resistance, 100 ohms. Normal resistance, 100 ohms. Circuit power range 100-300

ohms. Circuit power range 100-300 watts. Time delay approximately 10 seconds. Shpg. wt., 6 oz.

Quantity of 10 or more Each, Net .90

FOR COLOR TY

Specially engineered for Color TV sets, the COLOR SURGISTOR slashes expensive Color TV tube replacement costs. Guarantees longer picture tube life too. 250-400 WATTS: 117 VOLTS, AC-DC.

TS-263 Each, Net

RESISTOR

ond

RELAYI

combines functions of

LAFAYETTE LEADER KITS



BLONDER-TONGUE UNIVERSAL

SPECIAL TUBULAR AIR-SPACED TWIN LEAD

S UHF-VHF • Extreme Low Loss

WR-46-per 100 ft.

2.50

300 ohm airspaced tubular lead with copperweld conductors. Shpg. wt., 3 lbs. per 100 ft.

per 100 ft.



BOOSTER & COUPLER

- . BOOSTS SIGNAL FOR 1, 2, OR 3 TV SETS
 - . COUPLES 1, 2, OR 3 TV SETS WITH 1 ANTENNA
 - WORKS WITH ALL TV SETS
 - -IDEAL FOR COLOR TY

tensiled strength galvanized steel wire.
For any guy application, An excellent buy.

WR-28-50 ft.rall(Shpg.wt., 1½ lbs.)Net.35 WR-29-100 ft.rall(Shpg.wt.2, lbs.) Net.59 WR-30-500 ft.rall(Shpg.wt.12 lbs.) Net 2.78

TRI-SET COUPLER

ZUB21/4. All Angle Base and Roof Mount. ALL ANGLE BASE

- . PERFECT FOR MULTIPLE DWELLINGS • FIXED TUNED-CHANNELS 2-13.

HANG IT ON REAR OF SET AND FORGET IT!

Made by the leading manufacturer of television amplifying equipment, this flexible combination television booster and 3-set coupler is a fine example of advanced engineering design and construction. It provides improved home TV reception without the need for tuning or adjustments. Simply make connections to convenient screw terminals, hang it on the back of the TV set, and forget It. Automatically amplifies channels 2 through 6 more than 6 db; channels 7 through 13 more than 2 db. Input for standard 300 ohm balanced antenna. Outputs for 1, 2 or 3 TV sets, 300 ohm balanced. Low noise figure—works well with all latest types of TV sets and reduces interference. Amplifies the signal on 1 or 2 TV sets, whether one or both are operating. Permits use of 1 antenna on up to 3 TV sets—outperforms all non-powered couplers by more than 2 to 1. Size 61/4" x 33/4" x 21/2". Uses 68K7A or 68K78 tube. For 117 volts. 60 cps AC. Shog, wt., 2 lbs.

Most popular swivel base mount in use taday. Warks on any surface—flat, slont, peak or wall. Heavy gauge weather-proofed steel. Takes any most up to 2½."

O.D. Complete with hardware.

TS-37. List 3.05......Net 1.79

BLONDER-TONGUE B-23 List Price 23,95 STEEL GUY WIRE Six strands of No. 20 high 300 OHM TWIN-LEAD

AN-35.

1.39 COPPER CONDUCTORS per 100 ft. LO-LOSS POLYETHYLENE

Can be erected in minutes; without special tools or drilling. Adjustable, Iwa-section brackets far maximum support of masts 1/2" to 11/2" O.D. Camplete with two 12-ft. lengths of 3/4" galvanized steel bands and hardware. Show who 2 the state of the sta

12-ft. lengths of 3/4" galvanized steel bands and hardware. Shpg. wt. 3 lbs.


High quality, low-loss lead-in for all TV and FM installations. Polyethylene di-electric—standard copper leads. Shpp. wt., 2 lbs. per 100 ft.

Stock No. WR-25-100 ft. 1.39 1,000 ft. 10.95

UNIVERSAL TV TUBE "BRITENER" EACH SINCLY \$1.29

in lots of \$ 1.39 Restares brightness to dim TV picture tubes. Operates an all types—magnetic or or series.

SUPER FRINGE AREA ANTENNA



3 Section Indoor Antenna (o): Adjustable indoor antenna. 3 section aluminum stoffs. Heavy, crockle finish bose, Camplete with 300r twin lead. Shpg. wt.. AN-12Singly, eq. 1.15

In lots of 3, ea. Switch Type Indoor Antenna (b): Indoor—6 position switch and crisscross chasing elements. For VHF_UHF-FM. 3 section bross elements. Bake. housing. With 300r lead in wire. Shpg. wt., 3 lbs. AN-39...........Net 1.99

PORTA-TENNA (c): A universal anten na for portable and stationary TV sets.
When not in use dipoles disoppeor. Can be placed on back of any TV set. 3 section, plated, telescoping dipoles. Complete with instructions, mounting hardware and lead in. Shpp. wt., 2 lbs.

> ECONOMY MOUNT

> > 99¢

Net 1.59

The most recent advance in antenna design and construction. Extremely high eain and front to back ratio. Phasing relationship assures equal gain on all VMF channels. Eliminates co-channel interference. Elements are double locked in high impact Styrene plestic insulators. Automatic brockers lock and secure all elements. Completely preassembled. Entire antenna snaps open and locks in. Dual insulators prevent waver, slip and their of elements. All aluminum construction. Single bay. Less most. Shop. wt., 12 lbs.

AN-37 List 33-19 Not 14.55 PERFECT :

AN-37, 38 and 41 Shipped by Express Only!

ALL CHANNEL'S "RIVIERA"

WORLD'S MOST POWERFUL ULTRA-FRINGE

VHF - UHF - FM ANTENNA UNTIL SEPT. 15th 17.95 GUARANTEED 200 MILE VHF

RECEPTION OR YOUR MONEY BACK

- Receives channel 2-83 from all directions without a rotor
- Broadband UHF-VHF and FM. motorless all direction recep-
- All aluminum Hip-out assembly


Field tests reception on VHF of up to 200 miles has made possible this unprecedented guarantee. Here is an antenne with one transmission line for ell UHF, VHF and FM stations in all directions without the use of a rotator. The nine position selector switch connected at the set electronicelly rotates antenne beam instantly without physically moving the antenna. Gein on channels 2-6 comparable to 4-bey conicels; on channels 7-13 comparable to 4-bey conicels; on channels 7-13 comparable to stacked 10-element single channel yagis; on 14-83 comparable to bow-the reflector, 16 ½" doweled aluminum elements are 60 inches long. Complete with switch, coupler, 45" stacking bars and 2 7½" angle type mast insulators for Polymicalens line listed below. Shpg. Wt, 10 lbs. ALL CHANNEL RIVIERA LESS MAST -

ALL CHANNEL LEAD-IN WIRE FOR USE WITH RIVIERA ANTENNA

Vio Express Special 4 conductors, matched imped-ance transmission line. Law lass, micafilled Polymicolene copperweld conduc

WR-8-50 ft. length .Net 5.00 WR-18 - 100 ft. length . Net 8.90

WR-9-75 ft. length .Net 7.50 over 100 ft., per 100 ft. , Net 8.90



MOUNT

TV TUBE BRITENER .79 EACH in lots of 10

Absolutely no tools or soldering needed for installing this handy inexpensive tube rejuvenator. You simply attach two plugs as directed on the instructions. For magnetic tubes and PARALLEL CIRCUITS only, Renews brightness contrast. **NEW! TV TUBE** RESTORER LOCATES AND CORRECTS FOR

GRID TO CATHODE SHORT . LOW EMISSION . COMBINATIONS OF ABOVE



One simple unit pravides the cure to any defective picture tube in any TV set. Warks an electrastatic ar electromagnetic facus picture tubes in series ar parallel-wired filoment TV sets. Carrects far dazens of picture tube faults, Shpg, wt., 1 lb.

TS-290-List Price 1.95......Net 1.15 TELESCOPING TV MASTS

Heavy-duty telescoping masts, Ideal far only TV antenno array. Not-dip zinc galvanizing inside and autside pravides unusual ruggedness and impenetrable carrosion resistance. Designed for easy installation and assembly. Husky thumb bolts lock sections automoticelly. No slipping, no twisting, Precision fitting assures lasting service. 18 gauge .003" wall. Supplied complete with all guy rings, clamps and necessary hardware. Total 5 10-th. sections for height up to 50 ft.3 O.D.: #1 (11½"). #2 (11½"). #3 (11½"). #4 (2"). #5 (2½"). Shipping express only.


50-FT, MAST — Cansists of all 5 sections listed above: Nos. 1, 2, 3, 4 and 5. Height 50 feet. Shpg. wt., 48 lbs.

Model TL-63Net 13.73 40-FT, MAST. Consists of 4 sections: Nos. 1, 2, 3 and 4. Height 40 feet. Shpg. wt., 37 lbs.

Madel TL-62Net 10.05 30-FT, MAST. Consists of 3 sections. Nos. 1, 2, and 3. Height 30 feet. Shpg. wt., 26 lbs. Model TL-61Net 7.28

20-FT, MAST. Consists of 2 sections. Nos. 1 and 2. Height 20 feet, Shpg. wt., 17 lbs.

Model TL-60Net 4.58



MS-12 in lots of 10, each 79- sinely.89 TS-268.

AUTOMOBILE RADIOS ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38

COMPARE! YOU CAN'T BEAT LAFAYETTES' WHOLESALE PRICES



900X

- The only Microscope in its class featuring GRADE A optics!
- Power Range 25X, 50X, 75X, 100X, 150X, 200X, 300X, 400X, 600X 900X
- · Full Range Fine Adjustment Safety Stop on Coarse Adjustment

Made to rigid design specifications-has wide usage in schools, laboratories and law enforcement agencies. All of the most needed features for diversified micro-studies. Power range from 25X to 900X in 12 possible combinations. Geared rack and pinion coarse focusing. Micromotion fine focusing-12 complete revolutions. 36mm (plano/concave) mirror. Fixed square stage, 70mm x 80mm.

Rotating 5-hole, disc diaphragm. Three Huygenian eyepleces of 5X, 10X and 15X. Four achromatic objectives of 5X, 10X, 40X and 60X. Oversize base insures stability. Body perfectly balanced at any angle. Complete with upright, wooden carrying case.

F-338-List 69.95

Net 34.50

PREPARED MICROSCOPE

800X "MICRO-SEARCH" Laboratory Standard Microscope

- . RECENTLY DEVELOPED DESIGN
- . INFINITE MICRO-METRIC SLOW MOTION ADJUST
 - HUYGENIAN EYEPIECES -ACHROMATIC OBJECTIVES
- 100X-160X-200X-320X 500X-800X

A truly fine dry system microscope, suitable for a wide range of laboratory-professional-and callege use. Manacular tube of most recent, anepiece, design. Spiral rack and pinion facusing mechanism. Coaxial, dual knob, coarse adjustment. Infinite micro-metric, fine adjustment. "T" shaped, dave tailed, slide, of improved designautomatic stop prevents over-rise. Square stage, 70mm X 75mm, with click stop, substage, diaphragm. 30mm plano-concave reflex mirror. phragm. 30mm plano-concover of 10X and 16X. Paired, American everpless of 10X and 16X. Three after, horsesnow designation 50X, a.0°. Gray solin finish, silect 50% Groy solin fin sh, olech rubber pumper feel and corrying he wt., 7 lbs.

NEW! 30X-50X "STEREO-SCOPE"

VIEW #

• STEREOSCOPIC Binocular Dissecting Microscope • Wide Field 3-Dimension View • Two Models to Choose from

SEMI-PRO "STEREO-SCOPE": An especially engineered Instrument featuring the stereoscopsis and wide view field needed in biology — petrography — archeology mineralogy — criminology — industry — agriculture — etc. Indispensible for inspection of large specimens small parts - surface features of gross objects - dissection - etc. Fixed objective lenses and interchangeable eyepieces for a choice of either 30X or 50X. Prismatic able eyepletes for a trible of shift 300 of horseshoe base. Rack and pinion focusing. Automatic stop prevents over rise. Overall height 9½". Complete with fitted wooden carrying case. Shpg. wt., 6 lbs.

STUDENT "STEREO-SCOPE": A 30X stereoscopic binocular microscope—designed primarily for the student and serious hobbyist. Includes most of the 7.95 features of our "Semi-Pro" model shown on this page. Fixed objective lenses and non-interchangeable eyepieces. All optics are achromatic. Ground glass stage measures 21/8" x 2-13/16". Overall height 73/4". Complete with fitted wooden carrying

> F-335 .Net 17.95





1200X "RESEARCHER"

- MAGNIFICATION RANGE 25X 1200X
- . 4 OBJECTIVES, 4 EYEPIECES,
- FULL RANGE FINE FOCUS ADJUSTMENT
- FULLY CONTROLLED, INTEGRAL MECHANICAL MOVEABLE STAGE

This superb instrument closely parallels the "Society" grade microscope in every desirable detail and yet is available at very law cast. Provides heavy, stable harseshae base, smooth acting jaint, enabling the body to turn through 60°, perfectly bolanced at any angle. Tube length is 140 mm. Four Huyghens eyepieces and four achromatic objectives yield 16 combinations of power from 25% to 1200%. By means of two knurled micro-motion screws at the rear of the stage, it is possible for the operator to move the stage (and the slide) a distance of 3/16"-16", in any direction, while looking through the eyepiece. Hardware is of the finest quality. Tubes are of the highest grade chrame-plated brass. All fittings are expertly machined and threaded, making this scape suitable for the most exacting work. Scape cames with a set of 5 basic dissecting instruments, made of high-grade instrument steet. 10 slides, a pack of cover slips and a tube of maunting fluid. Includes davetailed waaden carrying case. Shipping wt., 10 lbs. Net 44.50



- . USE WITH ANY MICROSCOPE
- . FURNISHES BRIGHT, EVEN LIGHT



TOP TOOL VALUES for HOME or SHOP

New! WEN 'SOUPED UP' SABRE SAW



· HEAVY DUTY - full 6 Amp.

• 1/2 H.P. Motor - 1" Stroke · LARGEST CUTTING CAPACITY

● 6" 90° Cut-4" 45° Cut

LIST PRICE 44.95


ONLY

Bigger-more powerful-more versatile-faster cutting. Super-lang blade easily cuts through 6" x 6" lumber. Cuts 4" x 4" at a 45° angle! Power enough to cut steel plate up to 3" thick—iron pipe up to 2" in diameter. Comfortable—conventional saw grip with auxiliary knob for 2 hand control. Saw tilts 45°-sole plate always remains flat. Finger control trigger-switch. Hardened gears and heavy duty raller and ail to bearings. Constant air stream flows dust from line of cut. 3400 strakes per min., stroke length. Includes seven blades for cutting wood—steel—hardboard—sheet metal-pipe-leather-rubber-formica-etc. Rough cuts or fine scrall work, Equipped with rip guide and circle cutter guide, 8 ft, 3 cand cord and adaptor, 110 volts, 6 amp., AC-DC. 8" L x 7" W x 7\%" H. Shpg. wt., 8\% lbs. WEN 909 List 44.95

Extra Blades for WEN 909; Set of seven replacement blades. Shpg. wt., 1/2 lb WEN 900 List 3.40 Net 2.33

Wen "All Saw" Table: Converts 909 Sabre Saw to Bench Saw. Highly versatile. Wen9T2 List 14.95

NEW! Electrostrip OUTLET SYSTEM





- Every Inch an Outlet!
- Mounts anywhere quickly- easily!
- No breaking into
- Add outlets-move outlets— at will!

The most notable wiring development in years, intended for use in cammercial, institutional, industrial, office and residential occupancies. Quickeasy installation anywhere. On baseboord, workbench, walls, countersconducting or non-conducting surfaces. Hand forms to corners and irregularities. Eliminates extension cord dangers. No need for autiet planning—the outlets move as you choose. Permanent or temporary installations. Becomes a neat, attractive part of room decor—can be painted. Electrical connections where you want them-when you want them-along its entire length. Maximum sofety combined with accessibility. Will not support combustion. The four ft. kit includes four ft. of strip, 3 receptocles, 2 end cops, 12" feed in cord set and mounting screws. The 15 ft. klt includes 15 ft. of strip, feed in (outlet type), 4 receptacles, 2 end caps, 2 wire connectors and mtg. screws. All are U.L. approved, 15 Amps 125 V. AC.

EL-67 4 ft. kit-Shpg. wt., 11/2 lbs. EL-68 15 ft. kit-Shpg. wt., 31/2 lb. EL-69 Extra receptacle. Shpg. wt., 3 azs. Not .35

NEW! THOR SPEEDWAY "30" 3/8" DRILL



THOR SPEEDWAY "14"SANDER

Here's Our Hot Sander Special

PROFESSIONAL PERFORMANCEL MOTOR DRIVEN -3450 RPMI

SANDS-SMOOTHS-BUFFS-POLISHES-RUBS!

USE SHEET OR FREE (WET) ABRASIVESI

Get this new top quality sander for all sonding uses. Here's an orbital motion, motor driven finishing sonder (no lood speed . . . 3450 RPM) that sands, smooths, buffs, palishes, or rubs with both sheet abrasives ar wet (free) abrasives. Sonding area—41/2" x 51/8". Features all sealed ball bearings; direct-connected air-caoled motor. Rugged blue hammerloid cast aluminum body. Hondy switch prevents accidental starting. UL approved. Use on 110-120V 60 cycle AC only. Shpg. wt., 7 lbs.

THOR 14 -List 23.95 THOR 3509—Lambswool polishing pad..... THOR 5-106—18 sheets assorted sandpaper....Net

NEW! TUNGSTEN-CARBIDE Lifetime Sanding Accessories



- Lifetime Sanding and Cutting Tools
- Miracle Abrasive harder than steel
- Makes sandpaper obsolete

The amazing discovery of brozing tungsten carbide grits to steel makes possible the finest sanding equipment ever known. Each grit becomes a sonding edge that performs perfectly and stays keen and sharp indefinitely . . . and makes sandpaper obsolete.

FOR USE ON WOOD, PLASTIC, PLASTER, WALLBOARD, ALL COM-POSITION MATERIALS

Eliminates forever the nulsonce of stopping to change tarn or wornout sandpaper. Faster—easier—saves time, effort, and money. Discs for use with all standard power drills, sheets for use with all standard ascillating and orbital sanders. Avg. Shpg. wt., for discs & sheet-6 ozs,

Sanding Discs and Sheets

TYPE	Fine Grit (150)	Med. Grit (80)	Coarse Grit	Net ea.	
A) 5" Sanding Disc	HD-429	HD-430	HD-431	.87	
(B) 3%" = 9" Sheet	HD-432	HD-433	HD-434	1.12	

(C) S-In-1 Wheel: For use with power saws. Shapes-saws-plaughssands—dodoes. Cuts and sands in one operation. No bind, drag or kick back. 80 grit on one side, 36 grit on edge and other side. Never needs sharpen-

ing. Shpg. wt., 1 lb. HD-435 6 1/2" Wheel, 1/2" Arbor with reducer to 3/4" (D) Handy-Sander: Hand-sanding black kit. Contains sanding black, one

fine grit sheet, one coarse grit sheet and felt pad. Cleans easily with solvent or wire brush. Shpg. wt., 1 lb.

THOR SPEEDWAY "20" 1/4" DRILL

- BALL THRUST BEARINGS
- GEARED CHUCK AND KEY HELICAL CUT GEARS
- UL APPROVED

Husky-Low cost "4" geared chuck drift roted at a full 2.5 amps. Preferred and used by professional mechanics for many years. Built for continuous production on wood or metal Powerful, UL approved, universal motor. " capacity in steel, "4" in hardwood. Ball and self lubricating bronze bearings throughout. No load speed 2400 RPM. Strong, lightweight, cost aluminum alloy housing. Specially designed gear chain for greatest torque. Locking Trigger switch. Backed by Lafayette's famous Money Bock Guarantee, Shpg. wt., 5 1/2 lbs.

THOR SPEEDWAY "20"-List 18.95 Net 12.95

16.95 HEAVY DUTY

- RATED FULL 3.1 AMPS!
- %" JACOBS GEARED CHUCK
- DESIGNED FOR MAINTENANCE AND INSTALLATION.
- DRIVES HOLE SAWS UP TO 21/2 INCH

More power for service work—production lines—mechanics or anyone requiring an extra heavy duty 4" drill. 4" capacity in steel—4" in hardwood. Sealed radial thrust ball bearing-other bearings cilite. 925 rpm na load speed, 610 rpm full load speed. Die-cost housing, steel gears, and specially reinforced construction assure long tife. Trigger switch with locking pin. 6 ft. type SL UL approved cord, universal series wound AC-DC motor. For 110-120 volts, AC/DC. Overall length 81/2". Shpg. wt.,

THOR SPEEDWAY "30"-List 24.95

Net 16.95

NEW MODEL 4100 VERSAMATIC



. TURNS 1/4" DRILL INTO HIGH POWER

REVERSES-INCREASES POWER-REDUCES SPEED

NEW **Dual Heat** Soldering Kit

ADEL Hand "Nibbling" Tool

 Cuts any shape or apening by hand In sheet steel up to 18 gauge — in soft metals up to 1/16" thick.

Easily operated hand "Nibbler" cuts any ne hole in sheet steel - always and s. Ces not add strain

r-dutte, the sele, ofc.) inol form. Cuts in n-angle-rodius. e tool for cutting Shpg. wt., 8 ozs.

THOR-SPEEDWAY SPEEDSAW RATED 3.1 AMPS



. 3400 STROKES PER MINUTE

. TILTS TO 45°

The most exciting tool on the market today! It replaces the handsow for all types of sowing and takes all the hard work out of the job. Will cut wood, metal, composition; cuts straight and true and will cut bevel ongles to 45° either side of the cutting line. Being a small blode, the sow can cut curves, circles, scrolls easily. Con be used for long panel cuts, ripping, cross cutting, even on 2 x 4's; and it blows away the sawdust while cutting. Will cut wood up to 2" thick and steel %" thick. Its motor is meant for a lifetime—has allite bearings. Operates on 110/115V AC-DC: has on-off position push through slide switch, UL approved. Cames with 2 lig sow blades (wood and metal) and wrench, 6'2" conductor cord. Measures 634" L x 61/2" M Chan

THOR SPEEDWAY WE left of avoid an-: 148.9" guide. Shpg. wt., 11 lbs.

Thor Speedway 17246 Special combination after—Thar 17 Saw and 17246 Table Universal Saber Saw Blades: Kin of S. a.



. SPECIALLY SELECTED MICRO-SUBJECTS

Specially selected slides of universal Interest. Carefully preparedcleened, dissected, embelmed, steined, mounted and covered. Slides are professional size. Set includes 12 prepared slides and slotted, cov-

ered box for filing and storing.	stides and slatted, cov-
F-123-Parts of Invests	
F-124—Spiders and Disease Co.	Net 1.39
1-143-Tiny Creatures found around M.	Net 1.39
	Net 1.39
ef-128—Structure of Blood	Net 1,39
F-130-Life cycle of Investe	Net 1,15
7-131—Bacteria	Net 1.39
F-132-Pond. Marsh and San Life Dr. 1.	Net 1.79
	Net 1.59
F-135-Micro-Orognium	Net 1.29
"F-130-Substance of Calle	Net 1.29
*—Set of 6 slides	Net .89



Ina areas of circles, Shpa, wt., 8 az.

8" trig slide rule of laminated, selected bamboo. Face of white plastic with engraved, permanently accurate calibrations. Exceptional dimensional stability under all atmospheric conditions. Satin-finished facing provides a high readability, virtually glarefree face, Scales are A. B. Cl. C. D. and K on face - S. L. and T on reverse of slide. Table of formulae and equivalents is printed an metal back. C scale also has convenient conversion marks for changing degrees to radians, and for calculations involv-

Net 1.95

HUNTING WITH THE MICROSCOPE

Specially us tion. Provides a bus view. Controlled intensity, by mounts able condenser lens. Lamp may be raised or lowered to any desired height on its 41/2" stanchian. Inclination and elevation joint permit swinging through 360° in both harizontal and vertical plane. Fully adjustable for transparent or opaque specimens, direct or indirect illumination. Invaluable where oblique light is necessary. Operate on 110-120 valts AC/DC. Lamp is easily replaced. Self contained switch, card and plug. Lamp body is 51/2" long, stand is 51/2" high including bose. Shpg. wt., 1 lb. F-248

Not 2.05



F-381 8" Trig Stide Rule

Guide for beginners and advanced users of microscopes. How the microscope works. How to prepare and study cultures—set up a microscopic zoo and garden—grow micro organism-perform micro surgery. Profusely illustrated with photographs and drawings. 14 chapters of easy-to-read, highly informative text.

NEW EDITION

BK-1440

136 PAGES 542" x 8" UTILITY DRAFTING SET

. EXCEPTIONAL

VALUE

Made in Germany of hard rolled, nickel plat-

ed bross, All instruments are nested in a fitted.

velvet lined case. Con-

tains three side wheel

33/4" bow instruments

-one a divider, one


a pencil and one a pen.

drawing sets are used.

F-13

TECHNICAL DRAFTING

- · Center Wheel Adjustment
- @ Professions Oselity
- . .
- . A \$15.00 Value



A nne set of imported nickel plated brass instruments priced far below the usual price for this quality. Contains 61/6" self-centering compass, one leg knuckle joint with divider, pencil, pen parts and lengthening bar; 61/6" selfdivider, pencil, pen parts and lengthening ber; %/s lett-centering divider; spring bow divider 41/s, center wheel adjustment with interchangeable needle points; spring bow pencil and spring bow pen, both 41/s, with center wheel adjustment and interchangeable needle point; two 51/s, ruling pens; extra headle for pen and pencil parts; adjustment tool; lead case end leads; and sparse pert kit. eli in velvet tined snep closing case, Shpg. Wt. 11/2 lbs. Not 5.95

Sayette IMPORTED SLIDE RULE

10.45

- Machine Engraved Graduations
- Smooth Slider Action • Easily Read Graduations • Extreme Dimensional Stability
- Modern Scale Arrangements
- Saddle Leather Case

10" LOG LOG DUPLEX TRIG SLIDE RULE

10" Log Log Silde Rule: Constructed of specially selected, laminated, non-hygroscopic bamboo. All scales are machine engraved on white plastic in permanently accurate calibrations. Adjusting screws permit varying the tension on the slide. 21 scales in all including the more frequently used C, D and C1 scales on both sides of the rule. Evaluates trigonometric, algebraic and exponential problems. LLO and LLOO scales refer to B scale. All other scales coordinate and refer to D scale. Scales are L. LLT, DF, CF, CIF, C1, C, D, LL3, LL2, LL0, LL00, A, B, K, C1, C, D, S, ST and T. Scale characteristics permit multiplication, division, proportion, inverse proportion, reciprocals, calangents, squares, square roots, cubes, cube roots, logarithms, tangents, sines, Pl factor multiplication and division. powers and roots of numbers less than 1, powers and roots of numbers The most aften used slide rule greater than 1, logarithms to base "e". in all basic fields science, engineering, production and economics. Shpg. wt., 11/2 lbs.

F-341 LIST 25.00

Net 10.45

5" POCKET SLIDE RULE

5" Pocket Slide Rule: Convenient pocket sized slide rule of specially selected and treated bamboa. Will not warp, shrink ar lengthen under varying atmospheric conditions. A, B, C1, C, D and K scales engraved on white plastic surface. Reverse side of slide has standard S. L and T scales. The upper, beveled edge of the rule is graduated in m/m to 13 cm. Other edge is divided into 5 inches by 32nds. Only 5-13/16" lang over all. Corried easily in any packet. Shpg. wt., B az. Het 2.89

F-340 LIST 6.00

Net 2.59 NEW JET-E-RASE ELECTRIC ERASING MACHINE

- PORTABLE MOTOR DRIVEN!
- . TIME SAVING LIGHT WEIGHT -CONVENIENTS

All have reversible needle point. \$1/4" campass with pen

and pencil parts-and lengthening bar. 51/4" divider with straightening device, 5" ruling pen. Extra handle for use

with pen and pencil parts. Capsule with extra leads. Per-

fect for schools, lobs, industrials or wherever precision

- . FINGER TIP CONTROL!
- 4 ERASERS 4 COLLETS 2 BRUSHES!

The new, exclusive, Lafayette battery operated erasing machine is the most modern eraser available. Sleek and streamlined as a racket-erases fast as a jet. The entire unit has been designed for convenience—ease and speed in erasing. Battery operation does away with bulky A.C. materstrailing line cords-danger of shack. Safe enough for children to use. Entire unit-including battery-weighs only 4 az. Fits the hand as naturally as a pen or pencil. Switch precisely located for finger-tip control. Per-mag motor ensures quiet-smooth running-vibration free operation. Permanently lubricated, precision bearings assure long, trouble free life. Includes four eraser cores. One soft-two medium hard-one grifty-ta cover all erasing problems. Two brushes—one saft—ane stiff—for clean up, and four collets that accept both the eraser cares and brushes. Easily replaceable battery is a No. 1 or "C" cell. Supplied with bottery. Shpg. wt., 1/2 lb.

F-424 Kit of two each, erosers and brushes.



Net .24

for one year. Kit includes dual heat, 90.125 watts soldering gun-solderwire brush-soldering aid. U.L. opproved. 110-120 Y. AC only. Shpg. wt., 3 lbs.

Weller 8200K List 7.95 ... Net 5.83



were of power for eversize Power dry drilling! Perfect for concrete or any kind of masonry drillingt Law speed and high power for hale saw attachmental A professional tool that anyone can usel Comes complete with screwdriver bit-Phillips bit-1/4 socket set adapter-wrench pin and instruction book. Shop, wt.,

HO-195 LIST 14.05 Net 11.25

1/2" CHUCK FOR VERSAMATIC

Geared chuck-5/64" to 1/2" capacity-#33 taper to fit Supreme Versamatic. Shpg. wt., 1/2 1b.

.Net 7.38



VINYL PLASTIC ELECTRICAL TAPE

GUARANTEED FIRST GRADE

● 60 FT. x 1/4"

.008 in. THICK

. 10.900 V. BREAKDOWN

IN LOTS OF 24

45¢

First quality, pressure sensitive polyvinyl chloride tape. Extremely high dielectric strength of 10,900V breakdown. Insulation resistance of one million megahms, Over 150% elangation at break. Excellent resistance against ocids. alkalis, ails, salt water, etc. Tensile strength of 15 lbs. per In. High conformability: Forms tight, smooth protective wrap. Shpg. wt., 6 az.

HD-216-Plastic electrical tape, 60¢ per rall; in lats of 6, 50¢ per rall; in lats of 24, 45¢ per rall.



"VILLAGE **BLACKSMITH"** ANVIL

Here is workbench equipment long wanted -a rugged formand-home size anvil. 8" long, 3%" high and 3" wide at the base. Finds hundreds of uses in metal work, woodwork, leatherwork, etc. Exclusively built for the hame cruftsmen, hobbyists and formers. Shpg. wt., 8 lbs.Net 3.29 HD-404

and domatic HANDY LITE NEW LOW PRICE



- · Portable light and power . Locks at any length of 20 ft.
- · Retracts automotically

Provides light and power up to 20 feet from Installation, Swivels 180° when well mounted... 360° rotation when ceiling mounted. Detoches easily to

change location. Simply hang it up and plug it in. Eliminates the inconvenience and hozards of tangled cords. U.L. approved. Shpg. wt., 5 lbs.

Net 6.72 CORDOMATIC EXTENSION CABLE, Similar to above, except terminates with a 3-way power tap instead of high fixture. Extremely versatile—use indoors or out. U.L. approved. Shpg. wt., 41/2 lbs.

Not 5.84

THOR SPEEDWAY

6.5 Amp. 1/2" DRILL

• Full 6.5 Amp. Power Roting • Two-Position Roor Handle • Heavy Duty Sealed Thrust Ball Bearing on Spindle

This high power 1/2" Drill in the low priced field is built to professional standards throughout and with handling ease. Features high-polished aluminum alloy die-cost housings; safety switch with push-button lock for continuous operation; and removable top handle. Includes 3-jaw geared chuck and key. The rear grip handle can be revalved to either vertical or harizantal position, and can be fastened securely in either position. It can also be removed completely for close quarters work! Specifications: 1/1" capacity in steel; 1" capacity in wood; 6.5 amp, rating; 550 rpm no load speed; 400 rpm full load speed; sealed ball and allite bearings 1%" spindle offset. Has Universal series wound AC/DC motor; standard valtage 115V, other valtages available at extra cost. Complete with 10 feet, 3-wire, type SJ, UL approved lead cord; and 3-jaw geared chuck with key. Overall length with rear handle is 14%", less rear handle is 11%". Shop, wt., 14 lbs. THOR No. 40 DRILL



POWER DRILL ACCESSORIES (C) (1)

(A) 10 pc. Power Boring Set: For " electric drill or drill press, 8 different bits plus shank and wrench. Sizes ¼", ¼", ½", ½", ¼", ¼", ¼", ½", 1" and 1¼". Fast, clean bore at any angle. Shog. wt., 1 lb. HD-181

(B) Adjustable Hale Saw: For 1/4" electric drill or drill press. Drills any diameter from 11/2" to 21/2". Max. depths of cut 1 %". Dial indicator sets hale size without removal from chuck. Shog, wt., 11/2 lbs. HD-257 List 6.95 Not 5.11

(C) Drill Mait Sharpener, Sharpens drills from 1-1/16" to 11/4" size. 14" shaft fits any electric drill. Use it also to sharpen chisels, knives, scissors, wood bits, etc. Drill holder is factory preset. Adjustable tool rest. High grade, aluminous axide-stone grinding wheel, Shpg. wt., 1/4 lbs. HD-243

(D) 29 pc. Drill Set: 29 chrome vanadium twist drills with indexed metal stand. Sizes 1/16" to 1/2" by 64ths, Shpg. wt., 4 lbs.

HD-214 Net 5.40 Turned down shanks: Same as above, but with shanks turned down for 1/4" drill. HD-440

(E) 4 pc. Utility Kit: Grinds, polishes, sharpens, cleans, finishes, Kit contains 3" grinding wheel 1/4" thick, 3" double thick muslin buff, 3" wire wheel, flanged orbor with " shank, All wheels have 1/2" bare. Shpg. wt.,

HD-392 (F) Right Angle Drive: Holves or

doubles drill speed. Close coupled right angle drive. Fits 1/4" chuck or may be screwed to drill spindle. Includes %" - 24 male and female adapters-and 1/4 shaft adapter, Shpg. w1., 1 lb. Net 2.21 HD-269 Net 3.30

(G) Wood screw Countersunk set: 24 screw size and countersink combinations. Fits all drills and drill presses. Automatic stop for 3 depths. Bores for 8 most popular screw sizes from #6 x % to #12 x 1 %". Shpg. wt., 1/2 lb. HD-337 .Net 1.27

(H) SANDING AND POLISHING KIT Handy Sanding and polishing kit for use with drill or drill press. Kit contains flexible rubber 5" backing disc, 7 assorted sanding discs, 6" lambs wool polishing bonnet. Shpg. wt.,

HD-270 Not 1.43

(1) HI Speed Cope Sow Drill Bit: Drills, saws, cuts, reams. Use in any power drill or drill press. Cuts any shaped hale. Cuts wood, plastic, steel, brass, etc. Shpg. wt., 3 azs.

HD-75 Wood bit HD-74 Metal and all purpose

HD-439

VEN-

TURN TO ANY POSITION

USEFUL AS AN EXTRA

VERSA-VISE (D): All the features of a regular vise-pluslocks in any position, just tighten jaws. Turns to any work position. Use standing or laid flat-turns 360° either way. Larger Jaw surfaces-31/2" x 21/2" -plus removable pipe jaws. Jaws open 5" HD-282 Shop, Wt., 17 lbs.

Right Angle Adopters Adds best adjustment for holding work at any angle. Shpg. Wt., 21/2 lbs. Net 2.18

NEW Swingline 3.99

#101 Stapler Gun with 1,000 Staples

- High Compression Model
- Stoples within 1/16" of corner
- 100% Jam Proof
- Open Channel Loading

Revalutionary, new staple gun with tremendous, pile driving action. Delivers as much driving power as machines twice its size and weight. Highly maneuverable — perfectly balanced extremely lightweight. All case hardened steel construction. Rust proof, banderized finish. No ailing required at any time. Uses two stoples sizes — 4/16" and 5/16" — with no mechanicat changes. Shop, wt., 1 1/2 lbs.

HD-322 List-\$4.95 Net \$3,99 HD-323 Pkg 1000 4/16" staples Net .40 HD-324 Pkg 1000 5/16" stoples -40



· COMPLETELY PORTABLE

NOT A FLIMSY

"VIBRATOR"

FOR ALL PAINT. SPRAYING DUTIES

Here is a precision-built complete paint-spraying outfit manufactured to the highest professional standards and yet priced for the homeowners. With integral 1/4 H.P. mater compressor unit, not a vibrator. Now it's easy to do a professional-looking paint job, 4 times faster than with a brush. Use it far other spraying or blowing duties too. Spray adjustable from a dime size to 10" wide. Features an easy-to-use two-finger trigger gun; the body is guaranteed to be unbreakable. With 6 ft. cord, plug and 8 ft. of hase. Shpg. wt., 15 lbs.

HD-415-List 39.95. Not 32.89

Tayette's 38th Annual Summer Tool Sale Breaking Records for Savings

WIRE

STRIPPER-CUTTER

• Insulated Pandles

TUBING 1.20

A quality cutter for copper, brass, or aluminum tubing. Provides up to 1" copocity. Equipped with alloy steel cut-ting wheel and slide-lock reamer, Ideal for light plumbing etc. Shpg. wt., 8 az. HD-346

.29

Set of 13 high quali-ty chrome vonadlum twist drills, complete with me'al index. Sizes: 1/16" to 1/4" Dy a core, Shpg. wt., 8 oz.

HD-113 Net 1.29

ROTARY

RASP

TWIST DRILL SET



FLEXIBLE SHAFT ATTACHMENT FOR ELECTRIC DRILLS

- DRILL WHEREVER
- YOU WILL . TAKES UP TO 1/8" SIZE DRILLS

HD-389

HANDY WARDING FILE SET



. 6 INDIVIDUAL FILES . SPECIAL STEEL-DEEP CUT-HARDWOOD HANDLES

First quality German made file set. Perfect for shap — home — hobby work. Kit consists of flat, half round, tri-angular, square, round and toper files. All with individual bardwood handles. Sturdy plastic packet case included. Shaps.

WATCHMAKERS PRECISION SCREWDRIVER SET

Mandy set of 6 precision screwdrivers with nickel-plated knurled handles, swivel heads and tempered steel blodes. One each from No. 0 to 5—blade sizes: .025" to .100". In plostic kit. Shpg. wt., 3 az.

HD-444 Net .69




Multi-Use WRENCH SET





Fully nickel plated—special analysis alloy tool steel. It treated and hardened. 16 sizes cover the most aften countered nuts in the outemative-TV-radio-appliance habby fields. Sizes range from 13/64" to 7/16". Set cludes case with transparent cover. Shpp. wt., 8 oz. Net .69

7-PIECE SUPER NUT-DRIVER SET .99



Mast popular socket sizes—polished, hordened steel detachable shafts. Plostic handle with precision clutch. Contains: 1-3/16" hex nut shaft, 1-1/16" hex nut shaft, 1-1/16" hex nut shaft, 1-1/16" hex nut shaft, 1-1/16" hex nut shaft, 1-mber handle with chuck. HD-14-Shpg, wt., 2 lbs.



JACOBS TYPE DRILL CHUCK

Polished finish. Used as standard equipment on most electric drills. Made to rigid specifications. Compore our really low price. You'll find this same chuck selling for twice as much! Shpg. wt., 1 lb.



WOODWORKERS VISE

61/2" x 31/2" JAWS OPENS TO 41/2"

A fine, proctical tool far the

small shap-home-form or garage. Ruggedly built — will not loosen ar slip. Guides ore of finely machined cold ralled steel. Groy iron jows-face ground and finished. "I diameter screw—6 thread per Inch. Soves time and labor—indispensable to the woodworker, Perfectly balanced—designed for hard use. Shop. wt. 6 lbs.



SWIVEL CLAMP-ON BENCH VISE

Constructed of high grade cost steel. 21/5" machined and polished steel jows open to 21/5". Twin guide rods keep Jows aligned. Easy-turn swivel bose ollows unit to be swung instantly to any desired position. Shpg. wt., 31/2 ibs.

HD-107 Net 1.99



HAND TAP SET

- · AMERICAN STANDARD THREAD
- 5 MOST NEEDED SIZES . RUGGED TAP WRENCH

Hondy top set includes mast aften used sizes. Cansists of 6-32, 8-32, 10-32, 3/16-24, and 1/2-20 tops, rugged top wrench with T-bor handle; all in heavy plastic pouch. All threads are American Standard, "Extremely useful for repair and servicemen, Shpg. wt., 1 lb. HD-410.

Vinyl Insulated "PROFESSIONAL" Pliers



Chrome Plated

Tested Beyond Professional Specifications

Prafessianal quality—heavy duty—farged fram special heat treated, allay steel. Chrome plated to resist rust. Insulated with fitted, vinyl, non-slit handle grips—pratects up to 10,000 volts. Mond haned cutting edges. Machine milled teeth. Mandles shaped for easy grip and maximum leverage. Short fulcrum distance for greater gripping pawer. Uncanditionally guaranteed by Lafayette. Average Shop, wt., 10 oz.

Tempered steel—handy—easy to use wire stripper. Pawl cam lock sets to wire gauge. Designed to fit your grip—uses minimum pressure. Specially ground cutting edges. Cuts and strips at any point along wire. For service or light production work. Shpg. wt., Vt lb.

.59

13 PC.

Shog. wt., 10 oz.

HD-350 6" Diagonal cutter-wire stripper
HD-351 6" Long nose-side cutter-wire stripper
HD-352 6" Electronic oblique cutter-wire stripper
HD-353 6" Long choin note-side cutter-gripper
HD-354 7" Linesman's side cutters-beveled nose

1.69 7 in 1 HOLE SAW

Fits any electric drill, drill press, motor arbor, rotary sander or lathe. Cyclindrical saw blades cut holes from 1" to 2½" diameter in any ¾" stock. Hole sizes are 1", 1½", 1½", 1¾", 2½", 2½", 2½", ½½", 12 usize carbon steel saw blades fit into deep machined graoves in tool head and are locked into place by a full length lack screw. Cuts wand, plastics, metals, sheel-rock, wall-board, masonite, formica, etc. Has guide bit and automatic slug ejector. Shipping wt., 1½ lbs.

Net 1.69

5 PC. SCREW EXTRACTOR SET

Five piece, chrome vanadium, sterew extractor set. Removes broken and mutilated screws—bolts—studs, even 1/8" and 1/4" pipe. Simply drill damaged screw-twist extractor in—and back screw out. Set cansists of 5 extractors in wooden case. Shpg. wt., 1 lb.

HD-273

1/2" CHUCK FOR 1/4" DRILLS



Converts %" electric drill to ½" capacity, Properly machined to Insure correct balance. May also be used on standard ½ x 24 motor arbor or shaft. Shpg. wt., 1 lb. Net .99

NEW! PRUNING SAW



Remarkable new blode development for all fast pruning-trimming-wood sowing. Fine Sheffield steel blode com-bined with heavy duty hacksaw frame. The ideal tool for pruning-cutting green or dried logs-rough or heavy tum ber. Perfect for compers-foresters-public utilities, etc Cuts three times foster thon ordinary saws. Shpg. wt.

HD-453 Blade only, fits all 12" Hack saws
HD-211 Heavy Duty Hack saw

• 4 Most Needed

"RUBBERGRIP" SCREWDRIVER SET

- Screwdrivers
 Rubbergrip for Comfort ond Torque

ond Torque

Rubber inlaid handles grant maximum comfort and maximum torque.

Can't bite into your hands no matter how hard you grip ond turn.

Estra "Lift" improves bolance.

Blades are hardened and tempered.

Plated to resist corrosion. Set contains 5" x 3/16 and 6" x ½ standard drivers plus 3" x 3/16 #1 and 4" x ½ #2" recessed drivers. Shpp.

wt., 1 lb.

HD-455 Net 1.AS



S PC. ASSORTED 98. FILE SET

Five files selected for utility and durability. Good quality—equal to tiles selling for for more. Each one a different pattern—three standard shapes—two triangular. Sizes 6" to 12". Shaps, wt., 2 lbs. HD-456



HD-457 Set of 2

Two screwdrivers of unique design. Convenient—6 points on 2 tools. Utilitarian — the most often needed standard and recessed blades. and recessed blades.

"Tri-Y" grip pravides extra leverage you can't get from ordinary screw-drivers. Mardened and tempered blodes set in rugged, amberoid plas-tic. Shpg. Wt., 2 lbs. Net .98

Camper's Hand Axe

Tap quality, drop forged steel, one piece scout axe. Perfectly balanced. Re-curved, shack absorbing handle, Air-cushlaned rubber grip. Fully polished head and shoft. 24 az. weight, 13½" overall. With noil-puller. Fine steel can be sharpened to a "shaving" edge. Shpg. 1911, 2 lbs. ND-461.......Net 1.95

Net



LOCKING PLI-RENCH



Super power locking Eambination pliers, wrench, clamp and vise. Grips abjects of any shape. Easy to use—rugged—powerful tool. Exerts over 1,000 lbs. of pressure. Heat treated, drap forged [aws. Machine milled teeth. Unlimited uses as pipe wrench—locking and adjustable wrench—clamp—vise—press—super pliers—efc. Length 10°. Shaps, vs., 1 lb.

MD-126 Net 1.20

20 PC. AUTO SOCKET SET



Ideal for auta or home. Contains 8 regular 12-point sockets—7/16", ½", ½", 9/16", ½", 11/16", ½", and 15/16", ½" drive hex. L handle, 1 ratchet handle, 1 screwdriver adapter; also 7 ignitian sock-ets—¼", 5/16", 11/32", ¼", 7/16", ½", and ½" internal knurled socket; ¼" drive hex. L. handle. All parts are properly heat treated and nickel-plated Mounted in red wall bracket. Shpg. wt.

2.79 3 lbs. HD-446

20-PIECE TAP AND DIE SET



. NATIONAL COARSE SIZES Twenty of the most often needed taps and dies, Sizes popularly used in radia, habby, home, shop and light industry. Contains one tap and one die in each of the following sizes: 6-32, 8-32 10-24, 12-24, 1/2-20, 5/16-18, 1/6-16, and 1/6-14, and 1/2-13. Includes die stock and adjustable tap wrench. Entire set contained in a fitted metal case. Shap.

Net 5.59

The "ULTRA" Electro-Tool Kit



- Designed with the Technician in mind Professional
- **Quality Throughout** All the most often

The finest-most compact carefully selected tool kit we have ever affered. Each camponent tool chosen to offer utility and quality. The "ULTRA" kit cantains the fottowing: 5 ½" insulated side cutters, 5" insulated chosme insulated chosme plated to the compact of the chosme plated tweezers, shockpool and chosme plated tree shockpool and chosme plated tree plates and chosme plated for 10,000 volts, hand haned cutting edges. Side cutters have beveled nose, diagonals have provision for wire stripping, long nose has "wrench" grip jaws and cutters. The entire set is nested in a rippered, fitted, lined book type carrying case with handle. Measures a scant 9" x 5" x 2". Shpg. wt., 2½ lbs.

Ratchet Head SOCKETOOL



2.25 Amazingly versatile! Mandles carriage bolts, machine bolts, lag screws, sheet metal screws, machine screws, wood screws, coop screws—any style of head—stat-

screws—any style of head—slotted, recessed, square or hex.
Operates in straight or offset pasition—handy for hard-to-reach places. Universal ratched head works right, left or locks—speeds and simplifies any jobl Contains Shelton suregrip ratchet handle; straight hex adapter; 5 hex sackets—7/16", 3/1", 11/32", 5/16"; 3/1", 3 square sackets—7/16", 3/1", 15/16"; tool steel screwdriver bit for slotted screws; tool steel screwdriver bit for recessed head (Philips) screws. A fine small tool set, ruggedly constructed lips) screws. A fine small tool set, ruggedly constructed for hard usage. Complete in durable plastic case. Shpg.

NEW! GLO-BRITE KRYLON

3-Way Combo

Proctical combination of hard and soft faced hammer Permanent standard hammer

. FLUORESCENT COLOR SPRAYI

For use with any %"
electric drill ar drill
press. Made of hardened steel, it is ideat
for shaping of wood,
plostic, fibre etc.—
ploning of floars and
boards—mixing of points, oils and other heavy liquids.
Extremely handy for the hame craftsman, hobbyist, handyman etc. 2%" in diameter. 13/16" wide. Shgs. wt., ½ lb.
Net 1.66

. GLOWS IN DAYLITE!

For sure, quick ottention, Mokes ony white surface up to 4 times brighter—easier to see. Gives neon effect under block light. For do-it-yourselfers, display men, hunters, fishermen, compers, etc. Use on clishing tures, boat markings, life preservers, targets, auto bumpers, signs, displays, bicycles, etc. Numbers 3101 and 3102 are mode spec. MIL-P-21600 (AER). Used for aircraft wing tip and rudder markings. 16 az. push button cans.



COLOR Red Orange—633
Yellow Orange—634
Sunset Gold
Leman Yellow
Cerise
Green 3101

LIGHT WEIGHT LONG NOSE PLIER

Ideal for all types of delicate work and for reaching into hard-to-get-at places. Spring clasing—holds wires, nuts, screws etc. Handy for mechanics, assemblers, hobbyists. 8%" long, with soft plastic calared handles. Shpg. wt.,

"5 in 1"

BIG PAL Fisherman's Helper

Comprises 5 tools which comportly fold into one; "Dis-gorger"—backs-out hard-to-reach hooks; "Stilletor"— cleans and removes leaders from fly hook eyes; "Clipper"—uts lines, leaders and trims these and lures; "Screw-driver" and "Bottle-and-Con opener" are also included in this rugged and versatile tool.

MD-452

Not 1.59

"Little Smith" Anvil "Little Smith" is the perfect componion for the hobbyistploin foolin' arounder. Measures only 4%" x 2%" x 2%" overall. Rugged enough for heavy pounding-sized right a perfect paper weight for the

Net .98 HD-460

SCREW-MATIC . SCREWDRIVER ATTACHMENT



Can be fitted to any fixed or portable drill, to drive up to 1/2" diameter wood screws quickly "non-stip" industrial-type clutch disensages itself when screw is driven home. Special bit halder prevents bit from stipping out of sciew slot. Includes two hardened tool steel 1/2" hex bits for No. 2 Phillips head and far Na. 6 to No. 14 slotted screws. Shpg. wt., 11/3 lbs.

MOTOROLA VIVIO SETS For Domestic,

10% DOWN! MOTOROLA AUTOMOBILE SETS

UNIVERSAL MANUAL TUNING AUTO RADIOS WITH EXTERNAL OVAL PM SPEAKER



MODEL 8MX

TRANSISTOR POWERED

MODEL 8M


TRIM PLATES For neat in-dash instal lations

in domestic cars. Specify make, year and model when ordering.

BUICK	54 thru 59
CHEVROLET	53 thru 59
TRUCK	55 thru 59
EDSEL	58-59
NASH RAMBLER	57 thru 5"
PLYMOUTH	53 thr , 59
PONTIAC	57 thru 59
STUDEBAKER HAWK	55 thru 59
PIM PLATES	FOR
	BUICK CHEVROLET CHEVROLET-GMC TRUCK EDSEL NASH RAMBLER PLYMOUTH PONTIAC

SPORTS AND FOREIGN CARS SEE CHART

BUICK - CHEVROLET - OLDSMOBILE - PONTIAC - VOLKSWAGEN



SPECIAL CUSTOM SERIES

- TRANSISTOR POWERED
 PUSH BUTTON TUNING
- CUSTOM FITTED TO EACH CAR

Specifically designed to custom fit your car with simplest installation. Sensitive transistor powered circuit uses 5 tubes plus rectifier. Heavy duty 6" x 9" PM speaker, automatic valume control, and tone control. Low bottery drain. For 12-volt aperation. Shop. wt., 10 lbs.

CTA6X	- Lot Cueatolet 33-30	
CTATX	- For Chevrolet 57	100
CTAAX	- For Chevrolet 58	NET
CTAGE	- For Chevrolet 59	
BKAAX	- For Bulck 56	EACH
BKATK	- For Buick 57-58	
RKAOX	- For Buick 59	59.95
OFATX	— For Oldsmobile 57-58	37.75
OFAOX	- For Oldsmobile 59	
DCA7X	- For Pontioc 57-58	
DCAGK	- For Pontioc 59	,
VWA7	- For Volkswagen 53 thru 59	
	istorized - For 6 volts only.	

ONLY \$6.00 DOWN - 10 MONTHS TO PAY!

MOTOROLA SPORTS CAR

SPORTS, TRUCKS, BOATS



\$49.80

\$5.00 DOWN - \$5.00 MONTHLY

\$5.00 DOWN — \$5.00 MONTHLY

TRANSISTOR-POWERED CHASSIS

NO VIBRATOR—NO VIBRATOR NOISE

REVERSIBLE POLARITY PLUG
FOR NEW CARS, OLDER CARS, FOREIGN CARS, TRUCKS, 80ATS

A realty universal car radio for all types of cars or boots with 12 valt electrical systems. Small—measures anly 6% with 12 valt electrical systems. Small—measures anly 6% with 12 valt electrical systems of the state of the stat

FOR TRIM PLATES FOR SPORTS AND FOREIGN CARS SEE CHART ANY TYPE 4.35

NEW! MOTOROLA 2 TRANSISTOR MANUAL RADIO FOR 12 VOLT SYSTEMS







*FEID N ._ SARS, SPORTS CARS, BOAT! AND TRUCKS

Extremely compact and efficient set for in-dosh or under dash maunting in most cars as well as for under dash maunting in most cars as well as for specially positioned installations. Features circuit specially positioned installations, reatures circuit with 3 tubes and 2 transistors, automatic valume with 3 tubes nod 2 transistors, automatic valume with 3 tubes nod 2 transistors, automatic valume with 3 tubes nod 2 transistors, automatic valume in indication of the control of the c

ground MODEL 301X for installations with positive

FOR 6 VOLT SYSTEMS

Similar to 300%, but has 4 tubes and 2 transisters and is for 6 volt systems. Less frim plate. Shaps. wt., 6 lbs.

Model 406

TRIMPLATES FOR ABOVE LARGE TRIMPLATE FOR UNDER DASH . SMALL TRIMPLATE FOR IN-DASH .

CUSTOM TRIMPLATE TYPE E CONSULT CHART FOR TRIM PLATES AND IN STALLATION IN FOREIGN AND SPORTS CARS.

Sports & Foreign Cars For Boats & Trucks

CONSULT THIS CHART TO DETERMINE WHICH SETS FIT SPORTS CARS AND FOREIGN CARS

This chart shows a choice of sets to fit the electrical system of your car, the type of installation, and if trim plate is required. An X in the column headed "TRIM-PLATE" indicates an accessory plate is required. In column headed "TYPE INST."

A OR E = IN DASH, B=UNDERDASH, C=AGAINST FRONT DOOR, D=THROUGH GLOVE COMPARTMENT DOOR. * = Dash requires simple alteration.

CAR MAKE AND MODEL	USE		TYPE INST.	CAR MAKE AND MODEL	USE	PLATE	TYPE INST.
Aifa Romeo 1956-58	300X 600X	X	Å.	Mercedes Benz 1957-58	300X 600X 8MX	x	Â.
Arnolt Bristal 1955-58	301X 600X	X	Ÿ.	Mercedes Benz 1958	300X 600X 8MX	X	A
Austin 1956-58	301 X 600X	х	B A	M.G.A. 1955-58	301 X 600 X	X	A:
BMW 1957-58 (Isetto 300)	900X	X	c	M.G. Mognette 1957-58	301X 600X		8.
BMW 1958 (Isetto 600)	300X		V.	Morris Minor 1956-58	301X 600X	×	8
Borgward 1957-58	8M 406	X	A E	Opel "Rekord" 1958	406	X	E
Bristal 1957-58	301 X 600 X		8	Panhard 1957-58	300X 8MX 600X	X	¥.
Citroen (1D-19) 1956-58 Citroen (DS-19) 1958	406 8M	X	B	Parsche "1600" 1957-58	406 VWA7	X	A:
D.K.W. 1956-58	406	X	D	Parsche 1956-57	406 VWA7	X	À:
ENGLISH FORDS Squire-Zephyr 1957-58	301X		В	Renault Dauphine 1956-58	406 VWA7 8M	x	À:
Zodiac-Consul 1957-58 Gogomobil 1958	300X 600X	×	¥.	Renault 4 CV 1956-58	406 VWA7 8M	x	¥:
	8MX	X	A*	Rover 1958 "1055"	301X	X	D
Hif n Minx 1955-58	301 X 600 X	X	A	Triumph 1955-58	301X	x	B
Hi 3n Husky 1955-58	301 X 600 X	x	В	Triumph Sedan 1955-57	301X 600X	x	B
J Sar (all) 1950-57	301 X	x	B	Voux Hall 1958	301 X 600 X	X	E.
2 Suor (1958)	301X 600X	x	A B	Valkswagen 1953-57	406 EM VWA7	X	Ÿ.
guar (wark vill) 1430	600X	X	A	Valkswagen 1958	406 8M	X	Ÿ.
Lloyd 1957 Mercedes Benz 1955-58	300X	X	Y.		VWAZ VWAZ		Â
Morcedes Benz 1955-57	300X	Ä	À:	Valkswagen Ghia 1955-58	VWA7	-	A.
	600X		ă.	Volkswagen 1955-58	8M VWA7	X	A
Mercedes Benx 1955-58	300X 600X 8MX	X	À:	Micro Valva 1957-58	406 8M	X	E

HI-FI REAR SEAT AUTO SPEAKER KITS






Add Hi-Fi Listening to Your Car Identical to SK-37 auto speaker his shown on this page except has hi-fi 6" x 9" cook speaker instead of single-cone unit. Excellent for music lover who wants quality are production. Specify chrome or gold grille. Shpg wt., 6 lbs.

FADER TYPE AUTO KIT

Caaxial speaker kit (same as SK-77) with laser for Hexible control at both front seat
and rear speakers and sound balancing. Specify chrome or gold grille. Shpg. wt., 6 lbs. SK-72

TRANSISTOR POWER 'PHONE 2-Station Telephone System



Lafayette Leads Again With This **New TRANSISTOR Development!**

AVAILABLE FOR THE FIRST TIME—TRANSISTOR AMPLIFIED
TELEPHONE HANDSETSI

125 MILE RANGE ON A SINGLE PAIR OF WIRESI

125 MILE RANGE ON A SINGLE PAIR OF WIRESI

126 MILE RANGE ON A SINGLE PAIR OF WIRESI

127 MILE RANGE ON A SINGLE PAIR OF WIRESI

128 MILE STANDARD "PENLIGHT" CELLS—NO EXTERNAL BATTERY OR POWER SUPPLY USED OR NEEDEDI

128 ANY NUMBER OF HANDSETS MAY BE USED IN A COMMON TALKING SYSTEMI

129 THE FIRST REALLY MODERN DEVELOPMENT IN INTERCOMMUNICATIONI

MUNICATIONI

MUNICATIONI


A revolutionary new development in telephane intercammunication, at extremely low cost, has been brought to you by Lafayette In these new transistorized telephane handsets. Each handset is complete with its own transistor amplifier, buzzer, press-to-talk pushbutton switch, buzzer pushbutton switch, and shielded cailed card (extendable to 6') with mole and female connectors ready to connect to 2-wire coble. Each handset is handsomely styled in heavy, high impact resistance, moulded plastif and provided with a metal loop for hanging on the side of a dept. etc. To call, simply press the red buzzer button and listen. Your party just depresses his press-to-talk button to talk, releases to listen. Voice cames through load and clear, with high degree of infelligibility. All stations are connected to the

ONLY

10 101k, releases to lipiden. Vaice comes through loud and clear, with a high degree of infelligibility. All stations are connected to the new 2-wire cable, and good signois can be received up to 125 miles with #22 wifel No external power supply or bottesty are remained with which will be service is extremely simple, and bottery replacement (a single "Z" cell is used) needs no tools at oil? TECHNICAL SPECIFICATIONS: AMPLIFIER CURRENT—0.2 to 0.4 ma. average; BUZZER CURRENT—60 to 90 ma.; IMPEDANCE (INPUT AND OUTPUT)—600 ahms; OUTPUT VOLTAGE—approx. 2.44v. max; POWER OUTPUT—10 mw. (approx. +10 db.) max; MINIMUM POWER INPUT (SENSITIVITY)—0.002 mw. (approx. -27 db.); MAXIMUM LINE ATTENDATION—35 db. (0.175 db./km.); DISTANCE FOR COMMUNICATION—200 km. (125 miles); BUZZER FREQUENCY—400 cps.; BUZZER OUTPUT POWER—60 mw.: OPERATING TEMPÉRATURE—50° C. max.; POWER SUPPLY—Burgess "2" or RCA VSO34 bottery cell. SHIPPING WEIGHT (PER PAIR)—3½ lbs.

Net 29.95

PA-8-2-Station Transistor Telephone System (2 units) PA-6 Single Transistor Telephone Unit
Burgess Z or RCA VSO34—Replacement battery for above (1 per handset)... Net 241 Alpha 1172-2-wire cable for telephone systems, per 100'



REAR SEAT AUTO SPEAKER KITS



6" x 9" KIT WITH CHROME OR GOLD GRILLE Complete kit for adding second speaker in rear of your cor. Includes a 6" x 9" PM speaker; 3-position selector switch for cutting in front, rear, or both speakers; dial plate with mounting bracket, knob, and hardware; chrame or gold grille; wire; and wiring instructions. Simple to install. Shpg. wt., 5 lbs. SK-94 Speaker kit (specify chrome or gold grille)

DELUXE 6" x 9" KIT with 2.15 oz. ALNICO V MAGNET Same as above but with deluxe speaker with extra-heavy Alnica V magnet (2.15 ax.). This is same speaker used in kits selling at twice the price. Shpg. wt., 5 lbs.

SK-37 Speaker kit (specify chrome or gold grille). 5" x 7" KIT

SK-42 Same as SK-94 but with 5" x 7" speaker and grifte (specify chrome or gold)

FADER TYPE AUTO KITS

Rear-seat speaker kits identical to those above except with fader-type controls to cut either speaker in or out or balance both. Shpg. wt., S lbs. Specify chrome or gold grille.

SK-55 5" x 7" hit. Some as SK-42 but-with foder control. 5K-95 6" x 9" kit. Same as SK-94 but with fader control Net 3.69

DELUXE 6" x 9" FADER KIT

Deluxe kit with extra-neavy-magnet 6" x 9" speaker, plus fader cantrol. Specify chrome or gold grille.

SK-56 6" = 9" kit. Same as SK-37 but with fader

Page 31



LAST MINUTE LAFAYETTE BUYS!



afayette's IMPORTED SLIDE RULES

NEW! DELUXE LOG LOG DUPLEX DECI-TRIG SLIDE RULE

Machine Engraved Graduptions
 Saddle Leather Case

● 25 Scales with 8 Log Log Scales ● 40" Log Log Dec. Fractions Scale ● Extended Range Avoids "Going Off Scale" ● Extra P Scale Simplifies Computations

Scale Simplifies Computations

Canstructed of specialty selected, laminated, non-hygroscopic bamboo. This brand new 10" lag log duplex trig slide rule is built for the most exacting demands and is a truly universal calculating instrument. Contains 25 scales in tatal. Has 8 log log Scales-40" Log Lag Decimal fraction scale. The need far the troublesame end-farend resetting of the slide is eliminated by the extensions of the C and D scales. Other scale arrangements also allow easier calculation of problems involving the value of trigonometric functions. The twin set of Log Log scales in faur sections each runs from 1.001 to 100,000 and .999 to .00001, thereby enlarging the scale by one scale length each compared with ardinary log log slide rules. Extra features include the scale which enables easy computations of vector problems involving two sides of a right triangle. Scales include L101, L102, L103, DF, CF, C1F, C1, C, D, L13, L12, and L11, L100, L, K, A, B, S, ST, T, C, D, D1, P, and L10. Complete with instruction book and saddle leather case. Overall length is 14". Shop. wt., 1½ lbs.

Net 15.95



9 VOLT TRANSISTOR

-VS300 TYPE

Replaces the fol-

MINIATURE MUSIC

BOX MOVEMENTS

PRECISION MOVING

MORE THAN 3-MINUTES

PLAYING TIME

• RUGGEDLY BUILT

Savings

These popular batteries are for Portable and Transistor radios, R/C equipment, experimenters, labs, and hobbyists, etc.

FRESH STOCK — BRAND NEW — GUARANTEED

-Here are three of the most popular types used and at RIDICULOUSLY LOW PRICES

671/2 VOLT PORTABLE-P45M TYPE
Replaces the folfowing batteries:
Burgess P45, P45M;
RCA V5215, V5216,

towing batteries: Burgess P6, P6M; RCA VS300, VS314; Eveready 226 VS218; Eveready 477 BA-3

9 Volt Battery Reg. 1.23 Net, ea. .59 Lots of 10, ea. .53

9 VOLT TRANSISTOR -2U6 TYPE Replaces the fol-

BA-1 671/2 Vo't Battery Reg. 2.75 Net, ea. 1.59 Lots of 10, ea. 1.49

lowing batteries: Burgess 2U6; RCA VS312; Eveready 216

9 Volt Battery Reg. 1.16 Net, ea. .59 Lots of 10, ea. .53

PORTABLE-UX45 TYPE Replaces the lowing batteries: Burgess UX45, RCA VS318,

Eveready 416 BA-5 671/2 Volt Battery Reg. 2.95 Net, ea. 1.29 Lots of 10, ea. 1.19

PORTABLE -XX45 TYPE Replaces the fol-

lowing batteries: Burgess XX45, RCA VS016, Evereody 467 BA-5

67½ Volt Battery Reg. 3.50 Net ea. 1.45 Lots of 10, ea. 1.35

RECHARGEABLE FLASHLIGHT



15.95

. NEEDS NO BATTERY

. ATTRACTIVE & DURABLE

. EASY FLIP-ON SWITCH

This small light weight flashlight fits easily into the palm of your hand. Two-tone (orange and white) colar makes an attractive oppearance. New concave glass top spreads out light, This unit can be used in many household applications, Ideal for use in the car. The detachable end covers a poir of male plugs by which the flashlight can be recharged. This feature allows the unit to be used for benchwork or where single light source is required in dork surraunding. Smooth filip-an switch permits easy action. Complete with one replaceable lightbulb. Measures 4% in length and 1% dlometer. Shape. wt., 4 oz. F-435



. BEAUTIFUL TONE These miniature music bax movements have an infinite number of applications for the ingenious home builder. Can be maunted in algorithm builder, can be maunted in a clarette boxes, perfume cases, etc. The unit is so delicately balanced that a slight rauch on the figwheet is sufficient to start or stop the movement, Has full 18 note scale. Precision-built drum and moving parts are made to last a life-time. Components are maunted on a die-cast chossis. Complete with threaded mounting holes and winding key. Size: 1% x 2% x %". Shop. wt., 6 az.

M5-578 AULD LANG SYNE Net 1.88
M5-580 MERE COMES THE BRIDE Net 1.88
M5-581 BLUE DANUBE WALTZ Net 1.88

PARTS

TRANSISTORIZED CODE PRACTICE OSCILLATOR

MINIATURE—PORTABLE
SELF CONTAINED BATTERY

POWER SUPPLY COMPLETE WITH OSCILLATOR-KEY-EARPIECE AND BATTERY PRODUCES CLEAR, CRISP, CW

Here is an ideal, inexpensive code practice oscillator for the amateur radio enthusiast. Long 38 inch wire from oscillator to eorpiece, allaws two persons to practice without interference. The unit is completely partable, and weighs only 6 oz. Oscillator cose and key base are made of handsome black plastic. All moving parts are durable metal, with both adjustable spring tension and contact clearance. Spade lug connectors are located on the key making it passible to disconnect the key from the oscillator and use it separately if desired. Earpiece is crystal type, and housed in sanitary plastic. The code practice ascillator comes complete with ascillator, key, earpiece and battery, and is ready far use. No estras are needed. Tone produced is clear and crisp, similar to that received during F.C.C. licensing examinations. Low valtage transistarized circuit utilized 1.5 volt penlight type battery which campletely ellminates any possible shock hexard, Size: Oscillator 2½" x 2" x ½". Key 4½" x 1½" x 1". Shpg, wt., 9 az. F.479

LAFAYETTE PRISMATIC READER

Makes reading in bed a pleasure, Ideal to use when you cannot rise to do reading or writing or anything that requires viewing at a right angle. The two prisms are mounted securely on regular eye-glass frames. Precision made prisms offer distortion-free viewing of backs or newspapers. Large-size prisms intereste total viewing area. Sturdy and durable frames are made of light, attractive, two-tone plastic. Special screw adjustment allaws maximum rotation of prism plane for mare than 45°. Specially sulted for use in hospitals, medical centers, and hames. Shop wt. 6 oz.

ROAST MEAT **THERMOMETER**

Take the guesswark out of racisting. Rugged sensing prabe plus meter movement tells you the carrect temperature far roasting meat. The meter scale is divided into six sections marked Beef Rare, Tender Ham, Beef Medium, Beef Wall-done, Lamb-Fresh Park, and Paultry. Non-breakable plastic window affords easy reading. Now, you can be sure your cooking is right. Shaps. Wt.,

OIL FILLED METALLIZED PAPER CAPACITORS

• PRICE IS RIGHT • EXCELLENT FOR BUILDING YOUR OWN CROSSOVER NETWORK . SELF-HEALING TYPE

These oil filled metallized paper capacitors have the advantage that they are self healing. Even many breakdowns are harmless. Capacitance talerance is \pm 10% of rated capacity. Dielectric lass less than 10% at 20°C, measured at 1000 cps. Insulation resistance over 500 megohns between terminals. Overall dimension for 2 μ f capacitor is 1% x % x 1%". Overall dimension for 4 and 8 μ f capacitor are 1% x % x 2%" and 1% x % x 2%" and 1% x % x 2%"

		pectivery.		
Stock No.	Ci,	D-0 VY 1	Jopy. wt.	
CF-114	2.	150	3 oz.	
CF-115	4	150	5 02.	.79
CF-116	8	150	8 oz.	1.19

MINIATURE RCA METAL INSULATED

48" CITIZEN BAND TELESCOPING ANTENNA

Ideal for mobile or fixed transceivers, miniature partable and packet transistor radios, and a host of similar applications. The 4 section antenna is made of chrome-ploted brass and plugs into a jack. Measures 48" fully extended and retracted 11" to facilitate carrying in packet. Complete with a flexible plastic case with slip-under



EXTENSION PLUGS & JACKS

(B) Extension coble lack that matches MS-593 plug ar any RCA phone plug. Shpg. wt., 4 az.

EXTENSION CABLE WITH MINIATURE

PHONE PLUG & ADAPTER

IMMERSION HEATER



This Immersion Heater can be used easily in auto mobiles ar vessels. It heats water in approxi-mately 2 minutes by simply plugging it into any outlet. Can be used to make coffee, tea, soup, etc., heats water far shaving and for warming the baby's bottle. Complete with a plostic bag and

CROCODILE CLIPS

Nickel plated brass type for low resistance Quality springs maintain positive action. Pro rided with rubber insulation. Shpg. wt., 2 ox

COMMUNICATION RECEIVER TYPE KNOBS



Malded of tap-quality Tenite, and hove easy-grip knurling. These knobs are 1-7/16" in over-all diameter with chrome-plated bevel skirts for attractive appearance. De pressed numerals are black enamelled on chrome plate. Designed to fit 1/4" shafts.

.34 each .29 each in Lots of 6

KN-54, Numbered 0-10 through on arc of 300° clockwise. KN-55, With a single etched center line index. KN-56, Numbered 0-10 through an arc of 180° clockwise.

4PDT ROTARY SWITCHES New three-position rotary selector switch can be used in hi-fi preamps and stereo applications. ¼" diameter, and 1½" shaft length. Quality construction with positive action. Shpg. wt., 6-az.
SW-30 Net .39



NEW AMPHIBIOUS FLASHLIGHT

Outstanding new all purpose floshlight which is water-proof and gos tight. Can be used under water or in the rain, Ideal for use in comping and working outside at night, On-Off Switch is of back handle type. Powerful light beam provided by two cells. Complete with nylon shoulder band. Shpg. wt., 1 lb. F-434.

ADJUSTABLE CURVE



Enobles anyone to draw curved designs with ease. The rule is easily bent to any desired curve with the forgers. Once bent, the rule stays curved without being held. White plastic frame encloses a lead bar and a steel sheet support. Overall length is 23½". Shop, wt., 8 oz.

FILAMENT CONTINUITY TUBE CHECKER

Smoll and compact as cigarette baxes, Quickly checks filoment continuity in a motter of seconds. Ideal for the serviceman or the technician working in the field. Tests filoments of radio, TV picture tubes. Also can be used to test many other ture tubes. Also can be used to rest many ofmer electrical devices and time cords, fuses, lamps and bulbs. Has sockets for TV picture tube and loctal, octol, 9-pin, as well as 7-pin sockets. Provided with two test leads. Grey hommertone finish. Size: 4 x 3 x 1½". Shpg. wt., 12 oz.

TE-11.



Eliminates expensive picture tube repairs. No elaborate equipment needed. Repairs grid and cathode sharts in two minutes—without pulling the chassist Eosy to use—decontominates cathodes—restores operation of brightness cantrol. Shpg. wt., 1/8 ib.

TS-282-List 4.90



10 for .90

RCA SELENIUM RECTIFIERS

BRAND NEW FRESH STOCK - STOCK UP AT THESE FANTASTIC PRICES! TYPES MAY BE ASSORTED FOR QUANTITY PRICES! All Dated 120V AC

	All Rafed 130V. AC.							
RCA NO.	MA.	LIST PRICE		EACH LOTS OF 10	LOTS OF 100			
20161	150	1.60	.50	.40	.36			
207G1	200	2.20	.55	.50	.45			
208G1	250	2.30	.60	.52	.49			
202G1	300	2.50	.64	.54	.49			



UNIVERSAL 6 & 12 VOLT VIBRATORS

Direct replacements for most popularly-used types. All brond new factory-fresh stock mode by leading national manufacturers, Fully guaranteed. Shaps, wt., ½ lb.

Price Schedule

All types may be assorted for quantity prices.

M5-582

AS LOW AS 95c Replaces Mollory 294, 859, 901M; Radiart 5300 5301; and many others. STOCK NO. MS-127 12-VOLT 3-PRONG Replaces Buick, Olds, Pontiac and GM part no. 1220155; Maltery G874, CD 6330, Deico 8550; and Vokor 3129.

1,29 STOCK NO. MS-128 12-VOLT 4-PRONG
1,09 Replates Mallory G859, Motorola 488522000, Philice
,99 and Mopar 83-0025-1, ATR 1340, Vokar 4124; and
,95 most loter 12-volt cor-radio vibrotors.



RCA YOKES

AS LOW AS 95¢ YOKES MAY BE ASSORTED FOR QUANTITY PRICES -

R	CA NO.	INDUCTANCE HOR.	RESISTANCE VERT.	MAX. ANGLE	PRICE	SINGLY	LOTS OF	5
1	201D12 237D1† 205D1	8.3 12 12.5	64.6 42 68.8	57° 90° 57°	9.00 10.00 10.00	1.05 1.75 1.10	.95 1.75 .99	

Supplied with domping and neutralizing elements

VE UP 75% ON LAFAYETTE RADIO PARTS

HEAVY DUTY 10 AMP DPDT MOTOR SWITCH

MOLDED PHENOLIC

. METAL FACE PLATE

handle ¾" lang. Shpg. wt., 6 az. SW-26 DPDT Taggle Switch

CASE

PORCELAIN CASED TUBULAR CAPACITORS

EXCEPTIONALLY RESISTANT TO HIGH TEMPERATURES AND MOISTURE SURPASSES PERFORMANCE OF MOLDED PLASTIC TUBULARS

new, they're different, and they're better! Now, at a price for less than that of ordinary plastic tubulars, Latayette brings you, for every day service work, a condenser that was designed for industrial applications. The case is of durable gleaming porcelain, a ceramic known for its high of imperviounness to moisture and resistance to heat. The capacitor is of finest quality, tested mes the roted voltage with much closer capacity talerance. It maintains its characteristics under a conditions of heat and humidity, it's mechanical construction is excellent, the leads are firmly at and sealed — they wan't twist or break off. We've selected the most popular values and put in two serviceman designed kits. Each condenser is planly marked. Each value is mounted on a handy strips. All are conservatively rated at 600 DC working volts. See chart for contents of



TESTED AT 3 TIMES WORKING VOLTAGE

Greatest Condenser Value Ever Offered!

KIT OF 100 KIT OF SO 600V W V DC

KIT NO. KI-52 5 Uat Value 32.00 4.95 SPECIAL NET

KIT NO. KI-51 Ust Value 16.00 2.75

SPECIAL NET

DPDT KNIFE SWITCH Overall size 15%" x 23%". Shpg. wt., 4 az. SW-24 Net ,19 Eo. — 10 far 1.75

INSULATED ALLIGATOR CLIP

Compact switches mounted on black bakelite base with insulated knob handle of black bakelite. Plated bross contacts provide positive law-resistance connection.

SPDT KNIFE SWITCH
all size 1 1/6" x 23/8", Shpg., wt., 6 az.
23 Net .12 ea. — 10 for .99

Warkmanship on this switch is of the best quality. Terminals are agersize, flow-free solder type which makes for seat, no-arc connections. Rated 10 Amps at 125 Valls, contacts easily take the current surges of motor starting. Size 13/" x 7/" x 1". Bushing 7/16" dia., 3/" long, bot

In lats of 10, Each .75

MIDGET-BAKELITE KNIFE SWITCHES



Sturdy nickel-plated brass thumb rest and insulated barrel. Strong spring with hard bite. Salder lug connection. Overall length 21/5".
Shgg. wt., 4 az. Supplied in Red and Black.

MS-451—Red Alligator Clip MS-452—Black Alligator Clip

A FABULOUS BUY! GENUINE LRC and ALLEN-BRADLEY Resistor Kit

10% TOLERANCE 100 INSULATED RESISTORS

1.000 2.200 4.700 10.000 22,000 27,000 33,000 47,000 1 meg 15 meg 27 meg

with QUANT. OHMS PLASTIC HINGED BOX!

Lafayette leads the field with a genuine Allen Bradley and IRC ½ watt. 10% tolerance, molded resistor kit with a Transparent Plastic Utility Box (built in partitions) size: 8½ x 4½ x 1-3/18". The finest resistors on the market. Molded in-sulated couposition resistors. Meet JAN-R-11 succeifications, including sait water, immersion and high bundldity tests.

LONG SHAFT CONTROL WITH SWITCH VC-10, 1 Meg. AUDIO TAPER

Each Lats of 10 Each .39

LAFAYETTE METAL CASED OIL FILLED TUBULAR CAPACITORS • Exceptional capacitance stability ● 10% Tolerance • High insulation resistance Wide temperature range

These ail-fitted and ail Impregnated paper capacitors are manufactured to high standards. Features 10% tolerance. Operates efficiently from -40°C to in metal case with plastic insulating outer

v dielectric leakage, low power factor and exceptional very combount of the compact, made to render lang servicing life. It replacement and original applications in radio, TV and other electropy of the compact of the

			NET	EACH			
36.	CAP	SIZE	1777	Lats of	Lats of		
TYPE	MFD	DXL	SINGLE	10	100		
C-800	.001	9/32 x 26/32"	.09	.81	7.00		
C-801	.002	9/32 x 26/32"	.09	.81	7.00		
C-802	.005	9/32 x 27/32"	.09	.81	7.00		
C-803	.01	9/32 x 27/32"	.10	.90	7.90		
C-804	.02	10/32 x 27/32"	.11	.99	8.50		
C-805	.05	13/32 x 1"	.12	1.08	9.50		
C-806	,1	15/32 x 17/16"	.14	1.26	11,40		

HEAVY SHIELDED PHONE PLUGS AND JACKS



ALLIGATOR TEST CLIPS

WITH 6 FT. LEAD

Mandy for quick connections. Plated bross alligator clip with insulated handles and 6 ft. of No. 22 stranded wire attached. Clip is $1\frac{1}{2}$ overall.

50 for 3.25 10 for .72 SINGLY, EACH .08

PHONE PLUG TO PHONO JACK ADAPTER

Brass, nickel-plated adapter. Has standard phone jack an ane end to take regular phone plug, and RCA-type phone plug an other end. Has threaded bushing with nut and washer so can be ponel maunied if desired. Shpg. wt.,

Precision

VERNIER

DIALS



Precision planetary drive vernier dials with approximately 8 to 1 ratio. Mounts on panel surface and has accurately centered metal inserts for ¼" shafts, Metal dials are brushed silver finish with deeply etched and black filled engraving to provide maximum legibility even under poor lighting conditions. Reads counterclockwise 0 to 100 in 180°. Uses tough scratch resistant for sure grip flufed molded knob and housing. Phosphor bronze and brass utilized for internal parts.

F-348 36MM (1 1/2") Diameter Vernier Dial, 13/16" from front to back F-346 70MM (2%") Diameter Vernier Dial 11/4" from front to back

LAFAYETTE SPECIAL 2-CONDUCTOR PHONE PLUGS

STANDARD 2-CONDUCTOR PHONE PLUGS
Phone plugs for a wide variety of applications with
chaice of handle sizes and materials. All sleeves fit standard 1/6" phone jacks.
FIG. A. SLIM PHONE PLUG Smooth bokelite handle.

Solder terminals with coble clamp.

M5-453

Net .25 ea. — 10 for 2.15

FIG. B. BARREL PHONE PLUG Ribbed plastic borrel

handle. Screw terminals.

MS-455
FIG. C. SMIELDED SLIM PLUG Ribbed chromed metal handle. Solder terminal with coble clamp.

MS-443
Net .29 ea. — 10 for 2.50
FIG. D. PHONE TO PHONO PLUG ADAPTER Adapts from standard phone plug to RCA type phono plug. Overalt length 2%" x ½" diam.

MS-444
Net .39 ea. — 10 for 3.25

STANDARD PHONE JACKS FOR 1/4" PLUGS

FIG. E. OPEN CIRCUIT JACK Standard open circuit phone jack, 1/2" bushing, 1/2" long. Complete with mounting hardware.

MS-441 Net .19 ea. — 10 for 1.75 FIG. E. CLOSED CIRCUIT JACK Some as above but

MS-454
Net .19 ea. — 10 for 1.75
FIG. E. OPEN CIRCUIT JACK Open circuit jack for

FIG. F. EXTENSION CABLE JACK Fit standard 1/4" ahane plug. Screw terminals. Barrel plastic handle phone plug. Screw terminals. Barrel plastic handle matches MS-455 Barrel plug. M5-442 Net ,22 ea. — 10 for 1,90

Ball handle S.P.S.T. taggle switch in molded bakelite case. Rated 3A-125 Valts. Supplied with chrame metal an-off Indicator plate and two mounting nuts. Body size 11/6" x 3/4" x 1/3" behind panel. Bushing 7/16 Diam., 7/16 Lang. Ball handle 1/y" lang. Shpp., wt., 4 az.

SW-21 SPST Taggle Switch

Net .22

JON SINGLE POLE SINGLE THROW

TOGGLE SWITCH

224 . BALL HANDLE





- Input, Output and Driver Transformers
- Only ½" x ½" x ½"

LAFAYETTE JUMBO 5-WAY BINDING POST

A new series of miniature transformers for transistor and experimental miniature circuits. Ideal for miniature radio receivers, amplifiers, hearing aids, etc., using standard transistors. Incorporate special heat-treated high permeability magnetic cores and treated to resist corrosion. Designed for improved frequency response with low distortion. 3" color-coded leads. Average shpg. wt. 4 07

Accepts phone tip plug, a spade lug, a banona plug, an alligator clip and a strand of wire. Head non-removable from stand. Molded plastic construction. For panels 1/16" to "Wisk, the either fed or black colors specify.

PJ-37—Shpg. wf., 8 oz. Net Ea. 254



F-373

HEAVY DUTY 6 AMP **DPDT SWITCH** 324 A TERRIFIC BUY!

LEAD KIT IN PLASTIC CASE

This kit consists of color coded 4% "long x ½" dia. red and black plastic handle pin prods with heavy duty 37" kinkless rubber leads with 5000 v breakdown insulation terminating in 2½" dia. plastic grip banana plugs. 3 sets of interactly and to the banana plugs. They are spade lugs terminals, phane tips and red and black insulated alligator collps. These items have their own handsome and handy compartmentalized flexible plastic case which snaps shut. Shpg. wt., 1½ lbs.

Heavy duty but handle taggle switch in enclosed bakelite case — Ideal for hundreds of applications. Roted 250V-3 amps or 125V-6 amps. Six solder lug terminals. Cames with chrome metal an-ord indicator plate and mounting nuts. Switch body $1\frac{1}{2} (\pi^2 + \frac{1}{2} (\pi^2 + \frac{1}{2})^2)$ behind panel, including terminals. Bushlan 15/32" dia., 7/16" lang. Bot handle $\frac{1}{2} (\pi^2 + \frac{1}{2} (\pi^2 + \frac{1}{2})^2)$ and $\frac{1}{2} (\pi^2 + \frac{1}{2} (\pi^2 + \frac{1}{2})^2)$. SW-22 DPDT Toggle Switch

Net .32 In lots of 10, Each .29

HEAVY DUTY 10 AMP SPDT CENTER OFF TOGGLE



TEST LEADS



ed with plastic prods and pin plugs which withstands chipping or breaking "Excovered 60" red and black leads. Prods are red and black 4" long x 3/4" diameter. Supplied in pair of one red and one black. Available with either pin or banana plugs

F-344 Test Leads With Banana Plugs Net .39

F-345 Test Leads With Pin Plugs

HEAVY DUTY 6 AMP

DPDT CENTER OFF

TOGGLE SWITCH

SPECIAL! 49¢



PUSH BUTTON SWITCH

In lots of 10, Each .19

Mamentary contact push button switch ideal for all miniaturized applications. Single pole two circuit push-to-make type. Berylium capper leaf contacts. Overall daimeter 1/5", overall depth 11/16", pratrudes 1/5" behind panel. Bushing 1/5" dia., 3/16" long. Supplied with washer and mounting nut. Ships. wit., 3 az.

MS-449 Miniature Push Button Switch

RUGGED TELEPHONE

TYPE 4PDT LEVER SWITCH ANOTHER



LAFAYETTE BUY! 694 EA.

Small 3-position lever action telephane type switch of rugged nan-inductive construction, perfect for large intercom switching panels, test equipment, model railrad cantrol panels, Communications systems, etc. Has 4 sets of single-pole, double-throw contacts, Chrome-plated actualing cam has 3 lacking positions and stays put in each pasition. (Switching action is shown in accompanying schematic diagram.) Black insulated lever handle. Heavinsulated raillers at end of com actuals switch contacts, and contacts easily demandable for making connections, if necessary. Mount to panel with 2 screws (furnished), 15/16" mounting centers. Size 2½" tong behind panel, 36" wide, 1-5/16" high. Shop. wt., 6 az.

SW-20 3-Position Telephane-Type Switch. Net. 69 Ea. Lots of 10, .45 Ea.

This heavy duty switch is ideal for small size equipment. Heavy silvered lugs for low-loss connections. Roted 10 amps at 125 volts. Body size $11/\mu'' \pi 9/16''' \pi 1/\mu''$ depth behind panel. Buthing $3/\mu''$ dio., 7/16''' long. Soft hondle 1/2'' long. Shpg. wt., 4 oz.

In lots of 10, Each .35

Achromatic BARLOW LENS

- Makes Any Good Telescape Better!
 Daubles Your Telescape's Power!
 Improves Definition!
 Provides Greater Eye Relief!
 Greater Illumination—Wider Field!

The Barlow Lens is a negative (diverging) lens which can increase the range of magnification of any given set of eyepleces. Greater eye relief is provided—even an short focal length eyepleces. Sharpens definition and reduces image deterioration by permitting use of low-power eyepleces to achieve high magnification. This also provides for greater illumination and a wider field. By increasing the effective focal length of the abjective—and reducing its relative aperture—it greatly reduces aberrations present in poorly corrected eyepleces. Lafayette's Borlow lens will make any good telescope perform like a much larger one. Fits all Lafayette telescopes except F-330 Explorer. Accepts eyepleces of 24.5mm (.97") O.D. and fits draw tubes of that size. Shpg. wt., 1 lb. The Barlow Lens is a negative (diverging) lens



ACCESSORY EYEPIECES

 Highly Corrected • Hard Coated • 24.5 mm O.D. • Finest Quality

Manufactured to extremely close tolerances by one of world's leading manufacturers of optical occessories. These oculars allow you to obtain maximum performance from your refractor or reflector. You can determine the magnification possible by dividing the focal length of the eyepiece into the focal length of the telescope objective lens. All are hard coated. The 24.5 mm O.D., (.97") fits most telescopes currently available

,				A Control Colors	
F-395	20 mm Huygens		F-399	Moonglass-for above oculars	1.25
F-394	12.5 mm Huygenion-Mittenzy	wey 5.45		Sungloss-for above oculors	1.2
1.373	9mm Huygenion-Mittenzwey	5.45	F-397	22 mm Keifner	7.9
F 303	0 - U	5.45		Kellner-Achromotic Huygenion	9.4
F-392	6mm Huygenion-Mittenzwey	5.44	1-370	10-31 mm Combination	
F-391	4mm Orthoscopic	8.95	F-304	26-32 mm Combination	r, ea
Stock		Net, ea.	Stock	# Description Ne	•
	i	surity decition	ie.		

30x, 60mm SPOTTING SCOPE

A prismatic telescope using the same fine features as expensive binoculars! Field of view is 85 feet at 1000 yds.! Both front and rear optics are coated. High relative brilliance due to great 60mm objective lens. Exceptionally small and light—weighs only 1½ lbs. including metal tripod! The perfect companion for shooting—hunting—viewing—naturalists—and hobbyists. Comes equipped with 11½" tripod and mount and zippered leather carrying case for both scope and tripod. Shpg. wt., 2½ lbs.

E.140

HARD MAPLE PANTOGRAPH




21" odjustable

panta graph— 21 different ra-tios from 11/6" to 8. Enlarges, reduces or

diagrams—
pictures—maps etc. Most rapid, accurate means of reducing or enlarging to scale. Lacquered highly finished
bars are 21" long and 3/4" wide. Heavy metal standard,
with bearing eliminates all friction. Chrame plated hardware—ratio thumb screws and nuts. Camplete with lead,
accessaries and detailed instructions. Shaps. wt. 2 lbs. Most rapid, accurate means of re

"draftette" DRAFTING MACHINE



Full 180° protroctor scale, finest aircraft aluminum with black satin finish. Engraved, white filled numbers and markings are machine calibrated to ± .0005 of an inche folds like a iacknife . stips into drawer or briefcose, eliminates clutter of T-square, ruler, protroctor, triangles. Clamps to drawing board or sketch pad. Layout chassis, diagrams, sketches, design detail, surveys etc.

F-287 Droftette with 3 x 5" scale, shaps. wt., 1 tb. 1114.95

F-289 Droffette with 3 x 5" scale, altoched to 11" x 17" drowing board. Shaps. wt., 3 lbs.

List 6.50

Net 5.20

OPTICAL MICROMETER

- Pocket sized Comparator
- Direct measurements to .005"!
- Measures DiametersRodil-Angles
- Linear scale in Inches

and Millimeters

High quality aptical micrometer using a triplet lens system of approximately 7 power. Triplet system affords a wide flot field of view. Extremely accurate reticle of eithed of view. Unaffected by changes in temperature and humidity—impervious to all, solvents and scratches. 0.5 inch linear scale calibrated to .2 mm. Hole diameters from 1/4 m to 1/4 m and from .005" to .05". Thickness scales from 1/4 m to 1/4 m and a from .005" to .05". And the scales from 0 to .00" Measures instantity—without adjustments. Accurate to edge of 1" field. Adjustable focus. Reticle removable for use at high power magnifier. Infinite uses in lab and industry. Complete with leather case. Shop. wt., 6 oz.

F-376

0

F-138

Jatayette's DIRECT IMPORTS

Make These Prices Possible

THE NEW Professionally Designed and Produced 2.4" EQUATORIAL REFRACTOR • 800-mm. Focal Length • 62-mm. Objective

· Micromotion adjustments on both exes ● Coated optics throughout ● Equatorial mount

160x—88x—40x—22x with eyepleces included 200x* by use of optional eyeplece

79.50

Only 7.95 Down

Latest in a long line of Lafayette refractors at reasonable prices. The unusual value of the Polaris is recognizable in the following specifications. Objective: Fraunhofer-type achromat, hard coated, 62.5 mm., 800-mm. focal length. Collects about 75 times as much light as the naked eye, resolving power 2 seconds, faintest discernible star 10.7 magnitude. All eyepieces are hard-coated Huygenians. Eyepieces Included: 160x (5-mm), 88x (9-mm), 40x (20-mm), 22x (35-mm).

Finder scope is 6x, 20 mm. Equatorial mount with slow-motion controls in right ascension and declination. Tripod head with latitude adjustment. Clamp lever for declination and inclination. Accessories include sunglass, star diagonal, erecting prism, sup rojection screen, field tripod, and wooden case. Magnifications of 160x, 88x, and 40x. Rack-and-pinion focusing. Heavy plating used throughout to prevent rusting. Shipping wt. 30 lbs.

F342 Shpg. wt., 30 lbs. Shipped Via Express Only F391 *200x obtainable by use of optional 4-mm Orthoscopic Eyepiece

Net 79.50

Galactic 3" Equatorial Refractor Sale! 189 00

* RESEARCH QUALITY

● 910mm FOCAL LENGTH ● 76.2mm CLEAR APERTURE ● MICROMOTION CONTROLS FOLDECLINATION AND RIGHT ASCENSION ● RESOLVING POWER 1.6 • 1.6" FINDER SCOPE - 500 MM. FOCAL LENGTH


• 1.6" FINDER SCOPE — 500 MM. FOCAL LENGTH

Truly superior auality—advancea aesign—aptically and mechanically suitable for serious research. The objective lens is a 79mm, hard coated, air spaced Fraunhoter achtemat with a clear aperture of 76.2mm (3"). Facal length 910 mm, focal ratio f/12, resolving power 1.6". Seven coated eyepleces provide magnifications of 227X, 152X, 101X, 73X, 45X, 35X plus 25X through the viewfinder. Facusing by means at micro-precise rack and pinion drive. The viewfinder scope has a 42mm (1.6) in, clear aperture) objective mount is oversized—insuring stability and smooth action. Finely calibrated hour and declination circles for rapid finding and setting. Micro-motion and rapid mation controls are provided for both declination and right ascension, Micro-motion controls are fitted with flexible shafts and oversized knobs for ease of positioning while viewing. Body tube of white enameted aluminum for maximum strength with minimum weight. Accessories include three sunglasses, managlass, two star diagonals, sun diagonal, erecting prism, van projecting screen, extensible field tripod, chain brace, accessory shelf and waaden cabinet. Shpg. Wt., 60 lbs. VIA EXPRESS ONLY.

**Same Truly superior and value for mount of the control of the control



COLLAPSIBLE ILLUMINATED **MAGNIFIER**



F-426 Burgess Z battery (2 required for above).

INDOOR-OUTDOOR THERMOMETER

ismatic Lens

Tell inside and autside temperature—instantly—from the comfort of your room. Inside location—ideal for quickesy reading. Dual tubes single scale for instant, visual comparison. Plastic case with modern topered lines. 8" x 2½" x 48" lang capper capillary tube and bulb. Large scale numeral for ease of reading. No maxing parts to become worn. Shpg. Wt. 1 lb.



MAGNIFICATION -

2" FIELD!

ONLY 2.95

Planetoid

• 2.4" Objective Lens Slow-motion controls

200x* by use of

optional eyepiece

F-329 Shipped Via F391 *4-mm Orthoscopic Eyepiece for 200x ... Shipped Vio Express Only ..

Net 8.95

DIRECT VISION PRECISION SPECTROSCOPE



ABNEY CLINOMETER

A finely made surveying instrument of professional quality. Made entirely of bross. The Abney topographic level enables the user to determine ground elevation—measures degrees of slape or inclination—run a level line—etc. Permits preliminary surveying with little or no experience. Fine prismatic system. Arc scale is divided into 60 degrees both sides of zero. Vernier scale reads 1 to 10 minutes. Arc twings from 0 to 90 degrees. Used by farmers—builders—gardeners—caretakers—mointenance menet. Particularly useful in loying aut drains—retaining walls and fences—driveways—fields—etc. Includes leather case and strap. Imported to save you 50% of regular cost. Shpg. Wt. 3 lbs.

● 400-800 MILLIMICRON SCALE

F-193

- ADJUSTABLE SLIT WIDTH; DRAWTUBE SLIT FOCUSING
- HORIZONTALLY SPLIT FIELD

A prismatic type, hand-held Instrument that has most features of the finest standard laboratory instruments. The millimicron scale is adjustable for sharp facus and for position (with "lack-in" feature to fix scale with relation to known spectral lines). Highest grade optics yields a broad dispersion field of high intensity obtained from best quality gloss dispersing prisms, while excellent less system resolves the closets pectral lines into 2 distinct lines. By a twist of the collor, a harizontally split field is obtained by which a comparison can be made of two light sources simultaneously. Tubes and collars are constructed of highly polithed corrosion proof steel. Equally suited to laboratory or field work, the spectroscope has a wide array of applications: emission spectrumonalysis of light sources; qualitative chemical analysis and metallurgical analysis by emission spectra, qualitative analysis of obsorption spectrum onalysis has application in many branches of technology—color and dye chemistry, blood chemistry, clinical medicine, criminalogy. Complete with plush-lined case, shipping wt., 1½ tbs.

Net 76.50

NEW Students Direct Vision

SIMPLEST WAY TO OBSERVE SPECTRA BETTER THAN ANY GRATING SCOPE OF EQUAL COST

HIGHEST GRADE OPTICS IN DIRECT

VISION FIELD Every physics, chemistry, science class, or hobbyist con offord to own this superb instrument. It is the simplest means by which one can abserve emission spectra from light sources and vaparized chemical salts, and the Solar Spectrum.

light sources and vaporized chemical statistics. Spectrum.

Spectrum.

A broad dispersion field of high intensity is obtained from several dispersing prisms of matched glass, while a high grade aptical system yields good resolution, sufficient to separate 5760.6A from 5790.6A in the spectrum of elluracternt lamp. The slit has adjustable width and can be focused shorply by means of an eye piece draw-tube, of secured shorply by means of an eye piece draw-tube, of surving easy viewing and establishment of Fraunhafer lines of the Solar spectrum or bright lines of the emission spectro. Metal parts are made of highly polished carrosion-proof steel. Cames in plush-lined care. Shipping wt., 9 oz. Net 19.50 F-359

REFRACTOMETER

- MODIFIED ABBE DESIGN NO MOVING PARTS TO
- WEAR OUT TO DETERMINE





Here is a beautifully constructed sclentific tool of simple design, easy to aperate, with no moving parts, except for the facusing eye piece.

Operation is very simple. A few drops of the sample are placed on the prism, the cover is closed and observation is placed on the prism, the cover is closed and observation is made by means of tungsten illumination or daylight. A perfectly clear field, completely calar corrected, shows a relicle graduated in percent from 0.32%. With the sample relicle graduated in percent from 0.32% with the sample in place as described above the field will show a sharp in place as described above the field will show a sharp dividing line between a bright and dark partian, where the dividing line falls determines the reading, which can be estimated to 0.1% accuracy. The instrument can be converted to a universal laboratory type by changing % readings to "index a of refraction" readings, No. (Consult Chemical Handbook or literature.)

This instrument is an essential tool in the fields of sugar refining, agricultural, food technology, medicine, theore tical chemistry, etc.

Comes in a convenient partable leather case. Shipping wt., 1% lbs.

Net 29.50 F-358

MAXIMUM-MINIMUM THERMOMETER



or woother enthusiasts-gardeners-formers, etc. Gives ree readings of a glance — maximum, minimum and event temperatures. Self-registering — no knobs — agnets — ar push buttons needed for resel. Magnifying ns case far ease of reading. Maintains automotic zheck temperature variations. Mokes you the local weather pert. Shop, wt., 1 (b.) List 6.95

CAMERA DIVISION ayette

presents PHOTOGRAPHIC SYSTEM VERSATILITY at LOW



'RANGEFINDER 35'

• 5 ELEMENT F2.8 COATED LENS!

COUPLED RANGEFINDER

BRILLIANT COMBINED VIEW-RANGE FINDER!

SINGLE STROKE RAPID FILM

TRANSPORT!

NINE SHUTTER SPEEDS TO 1/300!

MXF SYNC-ALL SPEEDS —

ALL BULBS — PLUS STROBE!

F2.8 45mm COATED LENS!

HI-SPEED REWIND! ✓ STANDARD PC FLASH TERMINAL! ✓ DOUBLE EXPOSURE PREVENTIONI ✓ BUILT-IN SELF TIMER!

✓ BUILT-IN SELF TIMER!

Lofayette's outstanding camera value! Precision-mode to order for the camera fan who is a wise buyer. Check the features — then compare Lafayette's price with any other brand. Fast F2.8 coated anastigmat lens and extra-wide lens operture for brilliant, sharper full color or black and white even in poor light. Sight and facus through combined range-view finder. Fully synchronized at all speeds for class. F, Men and Sight and facus through combined range-view finder. Fully synchronized at all speeds for class. F, Men as to 1/300th. Rapid advance sets shutter, counts expasure and ffansports film. Built-in delayed action timer — automatic exposure counter and film shop. Hi-speed rewind with folding lever. Standard accessory show on 10p-film type indicator. All metal body with brushed chrame trimblack leatherette covering. 20 or 36 exposures on black and white or color 35mm film. PG flash terminal. Shaps, wt. 3 lbs. Use series 6 accessories.

Net 29.95

F-196 F-197—Leather Eveready Case, Shpg. wt., ½ 1b.

Net 3.95 Three piece outfit -- camero above -- Eveready case -- and folding BC flosh gun, Shpg. wt. 4½ lbs. F-198

less

case

35mm. PROJECTOR-VIEWER • Projects Color Sildes • Sharp-Brilliant-F3.5 Lens • Fast Change Silde Lever Net Price 19.93

MOLDS 36 SLIDES © FAST SLIDE CHANGE LEVER Here is a lightweight and compact 35 MM viewer that compares with models selling for more than that compares with models selling for more than the price! Precision mode simple, fooling the self-cantalned 5½" square ground glass screen, the self-cantalned 5½" square ground glass screen, or project your slides on a light-colored wall or or project your slides on a light-colored wall or project your slides on a light-colored wall or with the same shorp focus. Magazine holds 36 with the same shorp focus. Magazine holds 36 with the same shorp focus. Magazine holds 36 with the same shorp focus magazine holds 36 with the same shorp focus. Magazine holds 36 with the same shorp focus 16 with the same shorp focus with the same short for least state of the same short focus with the same short focus of the same s

#-276 - Shpg. w1., 5 lbs



NEW-BOOSTER EXPOSURE WITH BOOSTER ASA Scale-LVS Scale

uxiliary lens pictured not included

Stills or Movies • Includes boaster—Leather cases—
 neck cord



Extremely versatile — extremely simple. Highly legible direct reading dial. Spends from 4 sec. to 1/1000 sec. direct reading dial. Spends from 4 sec. to 1/1000 sec. direct reading from 5.1 to 1.32. ASA scale 6 to 18. Cine scale 8, 16, 24 and 32 800. LVS scale 1 to 18. Cine scale 8, 16, 24 and 32 fromes per secand. Booster cell makes possible readings fromes per secand. Booster cell makes possible readings from the from the first telephone fro



New "SPEEDLITE" Electronic Photoflash operates on 110V AC or Midget Battery Pack

• FEATHERWEIGHT • SUPER POWERED • 4 SECOND RECYCLE • SO • SUPER POWERED • BUILT IN DIFFUSER • COLOR BALANCED LIGHT • BUILT IN DIFFUSER

Designed by one of the foremost electronic flash engineers. More power—more practical features than any other unit in its price class. Thousands of flashes from one lifetime tube—pays for itself in sovings on flash bulbs—less than ½ cent per flash. Featherweight flash head weight only 16 azs. Entire unit—including bablos—less than ½ cent per flash. Featherweight flash head weight only 16 azs. Entire unit—including bablos—less than ½ cent per flash. Featherweight flash head weight only 16 azs. Entire unit—including bablos—less than 5 ft. aC cord gives practically unlimited movement when extends 5 ft. for off-camera or bounce flash. La C cord gives practically unlimited movement when operating on AC. Universal brocket fits any camera with a tripad sacket. Gun also mounts an side of operating on AC. Universal brocket fits any camera with a tripad sacket. Gun also mounts on side of operating on AC. Universal brocket fits any camera with a tripad sacket. Gun also mounts on side of operating on AC. Universal brocket fits any camera with a tripad sacket. Gun also mounts of the camera with a tripad sacket. Gun also mounts of the camera with a tripad sacket. Gun also mounts of the camera with a tripad sacket. Gun also mounts of the camera with a tripad sacket. Gun also mounts of the camera with a tripad sacket. Gun also mounts of the camera with a second of the

.370 aftery used in 7-370 portable power pack. Burgess U160-List 7.95

FOLDS LINE A COPPRATION

Rosh with statement of the statement of

FAN-HEAD TRIPOD

• LIGHTWEIGHT — STURDY — LOW COST

Five section, chrome plated, brass tripod. Extends to 45" telescopes down to 12½". Weighs only 20 azs. Tension adjust screws for each legacomer actaining screw on panhead rotates — makes turning comera comera retaining screw on panhead rotates — makes turning comera comera comera comera that the state of the comera come

PRECISION 8mm MOVIE LENSES FASTEST! FINEST! LOWEST PRICES! 11/2" f1.4 Telephoto 6.5mm f1.4 Wide Angle

11/2" f1.9 Telephoto 6.5mm f1.9 Wide Angle

6.5mm f1.4 Wide Angle: Extreme wide ongle. Covers 4x area of narmal lens. Extremely fast— for paarest light conditions. Click staps f1.4 to f16. 8 element retrofocus formula. Facusing mount. Shpg. wt., 1 tb.

Net 24.30

300—Llst 49.95

/s" f1.9 Telephoto: Fost, sharp, fully coated. Click staps f1.9 to f16. Facuses 5 ft. to Infinity. 3x magnification. 5 element systems. Facusing mount. Shpg. wt.,

1b.
302—List 38.95
302—List 38.95
5.mm f1.9 Wide Angle: Covers 4x area of narmal lens. 8 element retrafacus
5.mm f1.9 Wide Angle: Covers 4x area of narmal lens. 8 element retrafacus
to place f1.9 ta-f16. Shap. wt.,

F.303 List 39.95
F.303 List 39.95
F.3.4 Motched Set: The finest available. Both fl.4 Telephota and fl.4 Wide Angle Fl.4 Motched Set: The finest available. Both fl.4 Telephota and fl.4 Wide Angle Fl.4 Motched Set: The presentation case. Shpg. wt., 2 lbs.
Net 16.49
Ne

Net 34.3U

Matched Set: The "Best Buy" passible for the movie camera fant Both

Matched Set: The "Best Buy" passible for the movie camera fant Both

Matched Set: The "Best Buy" passible for the movie camera fant Both

Met 34.3U

Met 34.3U

PAN-HEAD TRIPOD



• COMPACT - ONLY 81/2" x 6" x 41/2" OVERALL



ELEVATOR TRIPOD

• Folds to 16" including Panhead!

• Extends to 47" PLUS 7" Elevator!

Professional qualit steady — lightweigh. ...ncii

Net 9.49

2x2 VIEWER

LARGEST PICTURE AREA OF ANY HAND VIEWE

SEMI-AUTOMATIC SLIDE CARRIER 9X AREA MAGNIFICATION

The finest stide viewer avoitable. Distartion free, oversize lenses give brilliant, uniform coverage Largest picture area of any hand viewer for easy grdup viewing. Push button focusing, finger tip cantrol. Semi-automatic stide carrier automatically activates light. Built-in tripod sacket for table top use. Shop. wt., 1 lb.

Not 7.95



"35" CLIP-ON EXPOSURE METER

Fits comera accessory shoe ●ASA scale 6 to 3200

Measures reflected and incident light
Exceptionally convenient exposure meter. Clips right on
comero-quick easy reading. Gives better, more occurately
exposed pictures with a minimum of effort. Speeds 1/1000
to 30 sec. Lens aperture fil to f:22. Light value scale
[LVS] from 1 to 18. Cine settings from 8 to 64 frames per
sec. Measures reflected and incident light, Mounts on comera or may be hand held. Complete with leother case and
instructions. Shap, wt., ½ lb. F-351-Reg. 9.00 Net 6.95



Partoble all steel 35mm slide file. Store 150 2x2 glass slides or 300 2x2 cardboard slides. Includes index cord, and numbered strips for quick, easy Identification. Metal handle and 2 snap catches. Flinished in platinum gray ename!. Shpg. wt., 3 lbs. F-161.

35 mm Slide File

Polarizing Filter

FROM 6.44

F-311 Series 5 F-313 Series 6



1.69

& Viewer | PANHEAD Pan Tilt With A Single

Motion! high polished chrome finish.

chrome finish.
Comera retaining screw
ratates — makes turning comera
unneces- sary. Weighs anly 4 oz.
Handle is detach-able for
compactness. Twist of handle lacks
both pan and tith. Pans 260° tilts
approx. 145°. Shpp. wt., 8 az.
F-215 Net 1.66



Latayette—and only Latayette—has these lenses at prices never before possible! Now you can odd that distant scene—those exciting close ups. Add unlimited versatility to your mavie comero. The finest coaled aprics are used throughout fully color corrected. Fir all 8mm comeros with standard D mount such as Kadak, fully color corrected. Fir all 8mm comeros with standard D mount such as Kadak, Kaystone, Revere, Delur, Bolex MB, etc. Satin chrame finish. Removable lens hoods. Kaystone at the standard filters. Individual lenses complete with leather cases. Sets are packed in level type presentation cose. Complete with lens capt. Accept standard filters and the standard standard filters. Individual lens for 8mm. Exceptional speed—extreme 11/3" f1.4 Telephoto: fastest available lens for 8mm. Exceptional speed—extreme 11/3" f1.4 Telephoto: fastest available lens for 8mm. Exceptional speed—extreme 11/3" f1.4 Telephoto: f1.5 to infinity. Click stops f1.4 to f16. 3x mognification. 5 element lens. Facusing mount: Shpg. wt., 1 lb. Net 18.95 6.5mm f1.4 Wide Angle: Extreme wide angle. Covers A. ELECTRIC SLIDE VIEWER for all size slides

3.75



Mokes slide viewing a pleasurel Versatile built in adaptor centers all slides for correct magnification. Transparencies are brilliontly illuminated and enlarged through a fine optically ground and polished lens. Electrically operated—equipped with bulb, socket, on-off switch, 6 ft, cord and plug. All steel construction—finished in platinum grey enamel. Shpg. wt. 2 lbs.

F-26

Net 3.754

Genuine pigskin—not plastic. Full 10" x 8" x 4". Holds your camera and all accessories. 20" zipper top. Zipper pouch in lid holds filters, etc. Outside pauch with strap and buckle. All bross hardware. Laops and straps on bottom to hold tripad. Includes shoulder strap and pad. Shps. wt., 1 lb.

Shps. wt., 1 lb.
F-320 List 8.95

Net 5.95

Net 5.95

LAFAYETTE'S PHOTOGRAPHIC EQUIPMENT MAY BE PURCHASED ON LAFAYETTE'S EASY PAYMENT PLAN




ormula. Pixe

● BALANCES STEREO SYSTEMS ● TWO METERS IN ONE · ACCURATE TAPE RECORDER LEVEL INDICATOR

Farever ends the problem of adequately balancing your stereo system. Two laudness meters provide a continuous camparison of speaker levels. The scales are calibrated in "Valume Units" and percent. 1.2 volts input sensitivity, for OVU or 100 percent indication. Instead of cantinuously running back and farth between listening position and valume control, you can balance the entire system in one step. The special colibrating switch and 20 db attenuation controls permit exact matching of channels. The ideal recording level indicator far inexpensive sterea tape recorders giving accurate, reliable readings. Safeguarded against burning out by two internal DC blocking capacitars. Greater than 8,000 ohm impedance permits connecting to autput circuits without loading. The entire unit is haused in an attractive plastic case 3" x 1½" x 5%". Shpg. wt., 2½ lbs. TM-40 STEREO BALANCE METER.





LUG STRIPS

KIT OF 48 SOLDER

Replaces all snap terminal 67½ V. 8. batteries. When indoors vau can aperate set an regular 110V AC without using up your expensive "8" battery. Also rejuvenates old batteries far many extra hours of use, Complete with AC cord and plug. Fits in place of your battery. Size: 1½" x 2½" x 1½", Shpg. wt., 1½ lbs.

#195 Net 2.95

"B" BATTERY

ELIMINATOR AND

CHARGER FOR


PORTABLE RADIOS

2.95

Handy assortment of 48 satder lug terminal strips with 8 of each type fram 1 through 6 lugs.

NEW! LAFAYETTE'S MINIATURE HI-FI SPEAKER AND ENCLOSURE


6.95 SUPER/ VALUE!



NEW! FAMOUS BRAND 2-STATION INTERCOM

- ALL-METAL UNBREAKABLE CABINETS · VERY SMART STYLING-FOR CHILD'S
- ROOM OR LIVING ROOM FOR 117 VOLTS AC OR DC
- . SENSITIVE-PICKS UP SLIGHTEST

- SOUNDS AT A DISTANCE
 COMPLETE WITH 50' CABLE
 FOR HOME OR OFFICE
 DEAL BABY SITTER OR
 SICK ROOM WATCHER



Specially Priced At

Automatic Wire Stripper "Delayed Action Return" Strips solid or stranded
4 hole precision
ground blades
Strips sizes 12 to 20

Deluxe

Automatic — efficient — easy to use. Strips insulation from all wires, 12 to 20, neatly and quickly. Delayed return action prevents crushing fine wires. A real time saver for servicemen — electrical workers — production lines — etc. Narrow spaced handles for easy grip. Lightweight and easy action for less fatigue. No bother of changing blades or adjusting cutter for varying wire sizes. Extremely well built for years of service and uniform performance. Shpg. wt., 1½ lbs.

-122.	Station I	ntercom :	ivstem C	omolete.				Net 1	2.50		50' CAE							• • • • • • • • • • • • • • • • • • • •				Net \$3.	
				HE	LA	FA	YE		FOR	YOUR	CONV	-P	CUT	ALONG	POTTER	LINE	LAN	-Requ	ulres	01	nly '	10%	Do
		9							-					1		. .	NO.	Hyou wa ar sh	Street Ad		Please ,		
ette Radio		ddress		/ou have !													STOCK NO.	hipped to another p			ur full name & address	65-08 Li	AYE
D_{nn}				Pe vo												+	NO.	or to			ress	iberty 33, N	0.2
				4			-										REQUIRED		Postal Zone		Dot	lew Y	0 1
165-08	Postal Mail		-	our last													CHIPPED	State		-		enue York	Z
BERTY AV	lone S			order,							,		1					directions	State.	F.D. P.O. Box			
ENUE NEW Y	ate.			please writ						n 5							(Show Mir's, N	ore: Freight Air Exp	WE SHIP	HOW SHALL	Ordered Lafayette Catalog Number	F THERE EITHER W	payment s
ORK 13, N.																	Name When	3 5 2			from	freight. E	hould be s
r. BRONX	THEY AR	SHPG. CH	Pay or Check ho	is on E													Henever Possible	Order Deposit Bal. C.O.D. Easy Fay. Deposit	sed amour	nclude end for Postag	YES -	GENT IN YO	on with order
58, N. Y.	DERS. E SENT COLLECT	ADD ARGES ASY	ere der	his				-									9		MOUNT ENG	ugh money e/Shipping	to us?	OUR TOWN	tions. How
NEWARK 74 Centr	10	Addition Charles	Am'l. f	Tetal fi		-	-					-	-	+	\vdash		-		<u> </u>	9 4	NO -	SEND M	ally built n
WARK 2, N. J.	TOTAL	ostage/ shpg. Charges	m't. for Sales Tax if any	tal for Goods	-		\vdash	-	-				-							- 2	mected written This wil letter.	ONEY FO	nerchandis to postal to bulky
PLAINFIELD, N. J.													1	+			TOTALS			PLEASE DO NOT USE	nested directly with this order should be written an a separate full size letter sheet. This will speed handling of both order and letter.	no usually sent charges collect. ND MONEY FOR CHARGES. THEY ARE THE SAME IMPORTANT: Any correspondence not con-	with merchandite. due to postal regulations on various weights and the core bulky items; when necessary we ship via
BOSTON 10, Mass.	N.	POUNDS		INTAL OZ.									-				TRS OZ.	SMIPPING		3Sn J	s order should Il size letter she of both order c	EY ARE THE SA	prious weights o

(FOR EASY PAYMENT ORDERS-USE

INK-SEE

FOR EASY PAY PURCHASE USE THIS SIDE AFTER FILLING IN MERCHANDISE ON REVERSE SIDE.

MINIMUM ORDER \$20.00 TOTAL CASH PRICE -DOWN PAYMENT 10% OR MORE, MINIMUM \$5

NOTICE TO THE BUYER: 1. Do not sign this agreement before you read it or if it contains any blank space. 2. You are entitled to a completely filled in copy of this agreement. 3. Under the law, you have the right to pay off in advance the full amount due and under certain conditions to obtain a partial refund of the credit service charge.

Before filling out amounts see EASY PAY PLAN SCHEDULE and example. Figure your sums first on separate paper to avoid errors, USE INK. DO NOT ERASE OR CROSS OUT.

RETAIL INSTALLMENT CONTRACT LAFAYETTE RADIO CORPORATION (SELLER) 165-08 LIBERTY AVE., JAMAICA 33, N. Y.

sells and buyer purchases merchandise as described on reverse side hereof to be kept in good repair and unencumbered at buy-er's stated address. Seller shall retain title to and right to posses-sion of merchandise until fully paid. Upon default of any payment or payments seller may declare entire unpaid balance due at once and may also repossess merchandise retaining previous payments as compensation for the use thereof. If proceeds of resale of merchandise are insufficient to cover buyer's obligation, buyer will pay the deficiency to seller; if proceeds result in overage, seller will pay such overage to buyer. Payments will be made to the place and/or to any party designated by the seller

LAFAYETTE	RADIO	CORPORATION	(SELLER)

25.01 — 30.01 — 35.01 — 40.01 -

50.01 -

60.01 -70.01 -80.01 -90.01 - BUYER SIGN

HERE 7 Signed

(Add items 3+6)

Buyer's Copy Mailed-Date.

(Please Print)

Home Address

How Long At

This Address

and note example.

1. Total Cash Price

2. Sales Tax (if any)

3. Total (items 1+2)

(10% or more) \$5. Min.

(item 3 minus item 4)

6. Credit Service Charge (See EASY PAY Schedule

7. EASY PAY BALANCE

(Add items 5+6)

Total EASY PAY Price

4. Down Payment

5. Unpaid Balance

Present

City.

SHIPPING CHARGES RETAIL INSTALLMENT CONTRACT

EASY PAY ORDERS SENT SHIPPING

CHARGES COLLECT. DO NOT INCLUDE

To fill in spaces below correctly refer to

EASY PAY PLAN Schedule on this sheet

(L.S.) DATE

"EASY PAY-PLAN" PAYMENT SCHEDULE

				MINDI LIVITEDIA	ENTINETAL	SCHEDU
If Unpoid Balance is			Manthly Payment	If Unpoid Balance is	Credit Service Charge	Monthly Payment
15.00 - 25.	.00	2.50	5.00	100.01 - 110.00	11.00	10.00
25.01 - 30.	.00	3.00	5.00	110.01 - 120.00	12.00	10.00
30.01 - 35.	.00	3.50	5.00	120.01 - 130.00	13.00	10.00
	.00	4.00	5.00	130.01 — 140.00	14.00	11.00
40.01 - 50.	.00	5.00	5.00	140.01 - 150.00	15.00	12.00
50.01 - 60.	.00	6.00	6.00	150.01 - 160.00	16.00	12.00
60.01 - 70.	.00	7.0 0	7.00	160.01 - 180.00	18.00	13.00
70.01 — 80.	.00	8.00	7.00	180.01 — 200.00	20.00	14.00
80.01 - 90.		9.00	8.00	200.01 - 225.00	22.50	15.00
90.01 - 100.	.00	10.00	9.00	225.01 - 250.00	25.00	16.00
	_					

If Unpoid Balance Is	Credit Service Charge	nthr
250.01 - 275.00 275.01 - 300.00 300.01 - 350.00 350.01 - 400.00 400.01 - 450.00 450.01 - 500.00 On orders over \$5 of 10% or more. Pc charge will be is shown on schedul	35.00 40.00 45.00 50.00 00 00, send ayments an pa	.00 .00 .00 .00 .00 .00 .00 .00 .00 .00

For purpose of receiving credit for above EASY PAY PLAN purchase, the buyer makes the following representation

With Parents Whom Spause Living Alone	Landlard's Name and Address					_
Address P	ermanent (Check revious which)			TELL	How Long (Years)	
Age (Must Be Over 21)	Single Name of Spouse	Spouse Emplayed By		(Address)		1
Draft Classification Real Estate	Reserve Status	Have you bought Yes from Lofayette before? No	On time Tes Payment? No	If yes, please	give your Lofayette Account Number, No.	
Holdings-Addr	ess		City		Store	
Recorded In Name of		0 1	Present Volue \$		Mortgage \$	
Nome Present Employer	If self-employed, so state		Positian Badge Na.	Solary	How Long (Years)	i, Ji
Business Address			Any Other Income	Source		1
Name Former Emplayer					How Long (Years	
Bonk Account With	Savings Checking		(Address)	1 11 - 11	tong (Tears	,
First Frade Reference			(Address)	Highest Credit S	\$1111	Mai
econd rade leference	(Name)	(Address)	(City and State)	Highest Credit S	Owing \$	Moi
hird rade leference	(Name)	(Address)	(City and State)	Highest Credit S	Owing \$ Still Owing \$	Mar
dearest Colative	(Name)	(Address)	(City and State)		Owing 3	Pay
N	ame (DO NOT LIST THOSE	WITH WHOM YOU RESIDE)	Address		Relationship	

EASY PAY PLAN TERMS

FOR OFFICE U

State.

Telephone

tem (6) Credit

tem (7) EASY

PAY Balance

Balance

If Item (5) Unpaid

Service Charge

Your Monthly Pay (See Schedule) nt

You will pay \$10.

for 11 months or And your final M 10 payment will b

Buyer agrees

each month beg month after sh

and a final Mon

payment of \$_

to pay

EXAMPLE

Account N. O

WINIWUM EASY PAY PLAN AVAILABLE ON ALL MERCHANDISE EXCEPT IM ORDER — 20.00 — DOWN PAYMENT — 10% OR MORE, of the Tokyo Astronomical Observatory Dr. H. Hirose Designed lirose and DOWN

TAPE, RECORDS,

TUBES AND PARTS

CHARGES

SEE SCHEDULE

inclination matically **Adjustable** Adjustable Satellite

Orbits

Satellites

Travel around

Earth

Auto

Adjustable

STATES,

CANADA

MEXICO

Ī

and

Moon

-including

all stars

o f

151,

2nd,

orbita

by

Magnitude.

Navigators Aid for Students EST Aeronautics and Teachers

THE UNITED

AVAILABLE ONLY THROUGH LAFAYETTE

TIME NDER Astronautics. \$100.00

of Astronomy BE

RAZU PARENT


MORE LAFAYETTE SPECIAL VALUES!

NEW! A SCIENTIFIC INSTRUMENT FOR THE EXPERIMENTER ...

NOVATRON

- MINIATURE ATOM SMASHER
- PRODUCES 75,000 VOLTS
- ABSOLUTELY SAFE

COMPLETELY WIRED (NOT A KIT)



LAFAYETTE PROFESSIONAL QUALITY COMMUNICATIONS RECEIVER - ENGINEERED FOR THE AMATEUR

Superheterodyne Circuit **Utilizing 8 Tubes** & Rectifier Tube

- BAND SPREAD FOR EASY TUNING
- BUILT-IN "S" METER WITH ADJUSTMENT CONTROL
- **EXCELLENT SELECTIVITY**
- ACCESSORY POWER SOCKET PROVIDED
- ALL TRIMMERS PRE-ALIGNED
- COVERS 455KC. to 31MC. IN FOUR BANDS
- VARIABLE AVC-BFO AND RF GAIN CONTROLS BUILT IN PRE-CALIBRATED "S" METER
- SWITCHABLE AUTOMATIC NOISE LIMITER

HE-10 WIRED AND TESTED 79.95 8.00 Down

KT-200 IN KIT FORM 64.50 6.45 Down

High sensitivity superheterodyne circuit utilizes 8 miniature tubes plus rectifier tube and transfarmer input, full wave rectifier. The 80-40-20-15 and 10 meter amoteur bands are clearly indicated on the Illuminated face, and can be easily tuned with the pre-calibrated band spread. The receiver has complete band switching, thus eliminating the need for bothersome plug-in cells. Band spread is loid aut an easy-to-read 0-100 scale, and features a weighted control knab which offers smooth, preclise tuning. Coverage of from 455 KC to 31 MC is obtained through the ed four switchable ranges (455-1600 KC/1.6-4.8 MC/4.8. 14.5 MC/10.5-31 MC). All controls, switches and phone lock are located on the front panel, while on Sensitivity is 13 microvalts (Signal to noise ratio is 20 D8 at 3.5 MC) Selectivity is -60D8 at 1MC, Image rejection is -40D8 at 3MC. Panel is grey metal with white lettering, and controls are black with aluminum wt., 22 lbs.

8.00 Dawn



INDUSTRIAL TIMER SWITCH

No. 7.77







*AT LAST - AN ACCURATE LEVEL - AN INCLINE MEASURE ... AT A PRICE ANYONE CAN AFFORD -

Do Any Levelling Job e A fool of a seasures incline the season of a season of

atrument for every complete brick mason and wt. 6 lbs.

wt. 6 lbs.

wt. 40 - 417 - Urdt 6.95
In Lan of 6
HD-444 Corrying Case for Hoppy Transit



SCHAUER KAR- START



If you park your cer outside in well or wintry weather, you need Kar-Start. At Instant of starting. Kar-Start has the normal amount ins. Kar-Start has start from the start of spark from your plus automatically disconnected for starting only. It is will net domage plus when engine is running. It is will net domage plus when engine is running. Say your distributor. Simply easily installed with just 3 or distributor. Say your battery, time and quick connections. Says your battery, time and weight I is.

4-B477 for 12 V cars List \$7.95 net \$5.15



MODES T-1500 MI-FI TAPE RECORDER

A really precision portable high fidelity recorder made by a famous manufacturer of precision aptics. This latest model T-1500 is made available, for the FIRST TIME AT THIS PRICE, BY LARAFETTEL Dual speed (3.75 and 7.5 inches per second), dual track—provides up to 4 hrs. of record or playback time. Militars miniaturized components and all-metal airplane-type construction to achieve real partability—weighs only 18 lbs., to-noise ratio 48 db; 2 special hum balance controls; "Balanced Tones" high fidelity; exclusive high speed rewing lever; to-noise ratio 48 db; 2 special hum balance controls; "Balanced Tones" high fidelity; exclusive high speed rewing lever; tope, I empty takeup real, radio-by attachment card and hi-II coble. For 110-120 volts; do cycles AC. Shpe. wt., 21 lbs.

SK-707 STEREO KIT—In-line stereo head converts Model T-1500 for stereo playback. Includes stereo head, insulation, wrench, cannecting cable and complete instructions.

Net 31.05

ACCESSED DIES FOR MOLLENSAK T-1500—Reg. 229.50. Net 167.50

REG. VALUE T89.50 139.50 Fe-401 EAR PHONE—Fits either ear. Law Impedance.
Net 9.45
Net 9.45
Net 9.45
Net 9.45
Net 9.45 75C-403 CASE—genuine virgin vinyl, slip-over type case
Net 6.73
Wallandk recorders

SAK TAPE RECORDERS

18-908 MIXER—3 inputs. Mixes any combination of 3
mikes, phonos or radios
A196-2 MIKE EXTENSION CORD—15' with Wallensak
Net 6.75 plug and jack
A196-12 ATTACHMENT CORD — Connects radio, TV,
phono ar speaker to recorder Net 2.25

"PRESENTATION" NEW LAFAYETTE'S TRANSISTOR PORTABLE

Complete with Leather Case, Earphone & Battery

- · PERFECT BACK TO SCHOOL GIFT
- EARPHONE JACK—BUILT IN-FOR PRIVATE LISTENING
- . ULTRA SMALL
- · PRINTED CIRCUIT
- . REFLEXED FOR ADDED GAIN

A highly sensitive, super-selective true packet transistor radio that with surprise you with its performance over the complete broadcast band. The law low Lofquette price makes this a tremendous bargain! Perfect for back to school gift, or to give to your best friends, relatives. Of course, the all-transistor parable is your perfect companion during your travels, or just for quiet listening in the house. The circuit features reflex design for extra gain. Printed circuit construction affers trouble-free performance and extra long life. Hondsomely encased in a black molded cose with golden grille and attractive windows for readings of volume level and tuning. Separate tuning and volume controls adds flexibility and ease of aperation. Also provides a built-in PM speaker plus earphone jack, ferrite stick antenna, and special tuning condenser. Single long-life 9 volt battery for economical service. Plug-in earphone cuts out built-in speaker for completely private listening. Complete with attractive, soft, leather case, on extra battery, and a sensitive high output, crystal earphone with sonitary plastic ear-insert and 3' flexible cord. 3 transistors and diodes. Size: 3% x 2½ x 1½ x. Shpg. Wt., 1 lb.

FS-203. F5-203

SPECIAL SALE! ON FINEST GRADE IMPORTED BINOCULARS!

Each of these extremely precise optical instruments has a coated lens — clamped in (not just glued) prisms — lightweight ollay oil metal bedy — weatherproof, tear-proof auter covering. Made to our own rigid specifications, Lodgvette's famula to our own rigid specifications, Lodgvette's famula to our own rigid specifications, lodgvette's famula to our own rigid specifications of owners of the control of the c


weight.	0.1° of 1000 yards.	† L.W. == E:	atro ligh
57OCK N F-182 F-183 F-184 F-164 F-118† F-185	O, TYPE 6 X 15 1.F. 7 X 35 C.F. 7 X 35 C.F. X X 50 C.F. 16 X 50 C.F. L.W. 20 X 50 C.F. Add 10% Fed. You he	5HPG. WT., 2 lbs. 3 lbs. 3 ½ lbs. 3½ lbs. 3½ lbs.	NET EACH 10,75 19,95 27,50 22,50 29,50 32,50





TINY 6-TRANSISTOR RADIO

PLENTY OF POWER IN THIS SMALL PACKAGE!!



- PUSH-PULL AUDIO OUTPUT FOR FAITHFUL TONE QUALITY
- EARPHONE JACK—BUILT IN—FOR PRIVATE LISTENING
- . FULL TONE DYNAMIC SPEAKER
- BUILT-IN FERRITE BAR ANTENNA
- . TROUBLE-FREE PRINTED CIRCUIT
- SUPERHETERODYNE CIRCUIT
- . HIGHLY STYLED PLASTIC CASE

REGULAR \$48.50

INCLUDING EARPHONE BATTERY AND CARRYING CASE

. ECONOMICAL—USES ONLY ONE BATTERY

True superhet circuit with push-pull audio output powers either the built-in dynamic speaker or the personal-type earphone. The trouble-free printed circuit utilizes six ultramodern transistors plus germanium diode. Built-in ferrite-rod antenna brings in distant stations like locals. Single long-life 9 volt battery for economical service. Uses standard Burgess 2U6 or RCA VS 312 replacements.

Housed in smartly designed black and white case of durable plastic with gold-toned speaker grille. Soft leather carrying case with attached earphone pouch. "On-off-volume" control plus stylized tuning dial. Coverage 530-1600 kc. Just 4½" high x 2¾" w x 1½" thick and weighing a mere 12 ounces — a true purse/pocket portable. Lafayette "Tiny" 6-Transistor Radio — including battery, carrying case, and earphone for personal listening . . . all at an unbelievably low price!

FS- 200 "Tiny" 6-Transistor radio

NEW! SENSITIVE DYNAMIC EARPHONE SUPER VALUE

• FOR TRANSISTOR

RADIOS . ENJOY PRIVATE LISTENING

DURABLE AND ATTRACTIVE

A sensitive fine quality earphone designed to be used for all types of translster radios. Provides excellent listening pleasure at an unbelievably law price—clear reproduction of music as well as speech, with a pleasing tone quality. This lightweight miniature earphone is comfortable to wear. A flexible polyethylene support holds the receiver securely in place for either ear. Camplete with sanitary plastic ear-insert and 3½ flexible cord and phono plug, Impedance is 6 ohm. Shep. wt., 6 az.

MS-591 Net .79

3-TRANSISTOR MINIATURIZED HEARING AID

lafayette

HELP FOR THE HARD-OF-HEARING AT A PRICE TO SUIT ANY BUDGET!

6 TRANSISTOR

Now you can enjoy radio and TV programs, chats with friends and neighbors, church, the movies — because this efficient three-transistor hearing aid amplifies and improves the intelligibility of your world of sound.

The first switch and volume control permits adjustment to meet the first switch and volume control permits adjustment to meet the first switch and volume control permits adjustment to meet the first switch and the

NEW! LAFAYETTE 4 TRANSISTOR INTERCOM AND ELECTRONIC BABY SITTER



PRINTED CIRCUIT BOARD . NO ****

• EXTRA SMALL • NEAT • NO

Extra features . . . top performance . . . partability . . . long bottery life . . . ideal for home and office, Perfect as a partable unit . . for the summer callage . . . backstage for ance-a-year amateur theatricals . . . as well as permanent installation . . office to affice . . . kitchen to bedroom. This is a complete transistor inercom system, cansisting of a master station and a remale station. Specialized circu try allows each unit to call the other (remate can call the master even when it is turned off) while requiring only a 2-canductar wire for intercannection. Campletely transistorized. Requires only 6 valts from built in, easily replaceable batteries for hazard and makes this unit safe to use everywhere. Master station has a valume cantral and function switch with 3 positions, Talk, for speaking to remate; listen, for monitaring the remale (baby sitting, etc.); and standby which turns off the power to conserve batteries. Zera warmup time means the unit is ready for aperation. When the unit is turned off, the remate can call the called. Trouble-free long-life printed circuit board, carrect amount of negative feedback, and push-pull autiput circuit. Big 3" speakers are used for aptimum naturalness and intelligibility. cable and batteries. Shpg. wt., 6 los.



ECONOMICAL IN COST AND UPKEEP

A completely self-contained madern hearing aid whose power and sensitivity will apen up a new world for those with even severe hearing lass. Small enough to be cor¼" thick! Its 4-transister circuit provides high amplification, good intelligibility and quiet operation. The tiny plugs of both ends. Internal electronic companents are protected by a clear plastic cover which keeps the heartral permits easy adjustment for the warious requirements of daily living. The lumite case is extremely handsome and finished in gold by a special process to prevent peeling and rusting. A good-looking gray leather, yet baltery life is approximately 2 months with a rate of use of 4 hours per day! Ships. Wt., 1 lb.

1-20 50.

1-20 Hearing Aid

F-360 -Hearing Aid

Burgess Z ar RCA VSO34 (2 required)...

BATTERY FOR ABOVE

Net 29.50

Net each .08

NEW LAFAYETTE "ANNOUNCEOCOM" 4-TRANSISTOR INTERCOM

PA-72. The master unit is same as above, but the remate unit is hermetically sealed so that it can be placed authous. A push-but-ton buzzer aterts the master inside the house, and intercommunication can praceed as described above. Net 24.95

LAFAYETTE RADIO

165-08 LIBERTY AVENUE, JAMAICA 33, N.Y.

BULK RATE U. S. POSTAGE PAID

New York, N. Y. Permit No. 8486

FANTASTIC SAVINGS! 62% OFF! FAMOUS GE GC-7 DIAMOND STEREO CARTRIDGE



REGULAR CATALOG

low record and stylus wear. These are genuine GE GC-7 diamond needle cartridges backed up by both the GE and famous Lafayette guar-





