## It's Lafayette for... THE BEST.. THE MOST., at the LEAST!

### NEW! TRANSISTORIZED POWER MEGAPHONE Portable

Sound **Broadcaster** 

- IDEAL FOR OUTDOOR HAMFESTS
- EFFICIENT HORN PROJECTS SOUND 1000 FT.
- MICROPHONE DETACHABLE
  - ON 3 FT. CORD
    SHOULDER STRAP FOR EASE OF USE

A transistarized power megaphone with many unusual features and many applications. Basically a highly efficient sound projector harn with a built-in microphone capable of amplifying and projecting the vaice with a range of 1000 feet. The microphone is a telephone-type element, easily replaceable, and may be detached and extended up to 3 feet from the harn. The reflex-type harn is extremely light weight, of sturdy spun aluminum construction with a strap for carrying or placing on the shoulder. A press-ta-talk switch on the handle pravides



for economy of power use-power is used only when actually talking. No warm-up time required—amplification is instantaneous. Has control for setting three different volume levels to suit any environment. A patented non-linear current limiting device restricts current flow to safe levels for longest battery life. Uses a 9-valt transistar battery. Access to battery can be easily reached by removing the microphane unit. Size 12½" long overall; harn mouth is 7½" diam. Shpg. wt., 3½ lbs.

PA-56

### NEW! "ELECTRO-STRIKE-OMETER"®

- WARNS THE ANGLER OF THE BITE
- BEST FITTED FOR ALL KINDS OFF-SHORE FISHING
- EASILY ATTACHED TO RODS
- ACCURATE METER READING

Modern angler's dream materialized at last! Successful fishing requires patience, alertness and excellent timing. Many good strikes have been missed due to reliance upon mere sixth sense. Illustrated above is a simple device that is the result of researches made to develop an easier and more dependable way of fishing. Naw, with this new ELECTRO-STRIKE-OMETER any navice angler will be able to catch timely and exactly the warning of fish bite. Fishite is indicated by the movement of a meter needle. When fish strikes, the needle will swing within the "Care" section of the dial. As the fish proceeds to swellow the boir further, the needle will came to the "Pull Up" section on the dial. The fish will surely be caught if the line is pulled up promptly. A separate adjusting nabe permits adjustment of maximum swing as well as sensitivity of needle. Screw type adjustment in the bock permits adjustment of zero position of the needle. This lightweight unit can be easily mounted on any reel rods are shart rods for off-share fishing. The 1.5V dry cell can be replaced easily. The whole unit is housed in a rugged metal-grey plastic body. Can be used under any weather condition. Size éxtat". Shpg. wt., 4.5 az.



Reg. 12.50

NEW! 10,000 OHMS PER VOLT





- EXTRA LARGE 31/2" METER FACE COMPLETELY WIRED (NOT A KIT)
  ALL ACCESSORIES INCLUDED

#### FULL SCALE BANGES

DC VOLTS: 0-6; 0-30; 0-120; 0-600; 0-1200; AC VOLTS: 0-6; 0-30; 0-120; 0-600; 0-1200; DC CURRENT: 0-120, 0-30; 0-300M RESISTANCE: 0-30K; 0-3 MEG DECIBELS -20 to +63 in 5 scales; Capacity 50 µgF to 10 µF; and 001µF to 15U; OUTPUT RANGES 0-6; 0-30; 0-120; 0-600; 0-1200

0-120; 0-600; 0-1200.

Unbalisvable Bargain. Lafayette's new multitester is a camplete factory wired and tested instrument (not a kit). It can be conveniently carried in the pocket, and features answally sensitive 10,000 alms-per-volt AC-DC meter, 1% precision resisters, and the largest meter ever placed on an instrument of this size. Single easy-to-use range selector switch can be appreciated by the novice and the engineer elike. Case and ponel are made of durable bake-life. First capacity range requires 120 valts AC, second range requires 4 valts AC. Probes and flexible leads are plastic coated and color coded. Size 4½ x 3½ x 1½. Complete with leads and battery.

### NEW! REVOLUTIONARY SPECTA-RADIO®

ON-OFF SW.



- IDEAL FOR SPORTS EVENTS, OUTDOOR USES
- GOOD TONAL QUALITY
- ATTRACTIVE AND
- LIGHT WEIGHT **EXCELLENT FOR** SUNWEAR



- 3 TRANSISTORS PLUS GERMANIUM DIODE
- SEPARATE VOLUME AND TUNING **CONTROLS**
- BUILT IN EARPHON JACK FOR PRIVATE LISTENING

This revalutionary SPECTA-RADIO design is ideal far wearing in ball games, sports events and any autdoor settings. Provided with superior quality glare-proved sunglasses for easy viewing. Its 3-transistor circuit prevides high amplification, good tonal quality, and quiet operation. A smooth operating valume central permits

ST.302

easy adjustment for different listening conditions. Slid type dial allows easy tuning, Light and ottractive, it suitable far both men and women. Complete with built earphone, Shpg, wt., 3 az.

### GOLF RANGE FINDER NEW!



8.95

- PRECISION 6X LENS
- **MEASURES FROM 40** TO 250 YARDS
- HANDY POCKET SIZE
- WITH LEATHER CARRYING CASE

This exciting new Range-Finder is bound to prove an invaluable addition to your Galfing Equipment. Featuring a precision 6X lens copable of measuring from 40 to 250 yards, this handy pocket size instrument enables the galfer by means of a simple fecusing adjustment to easily campute the distance to the next hole. Guess work is completely eliminated and choosing the correct club is greatly simplified. Supplied with suede leather carrying case and simple instructions. Shaps. Wat., % lb. F-627 Golf Range Finder F-427 Golf Range Finder

CATALOG

afayette 165-08 LIBERTY AVE.

JAMAICA 33, N. Y. **AXtel 1-7000** OPEN MON. AND FRI. TILL 8:45 P.M.

100 6th Ave. WOrth 6-5300

NEW YORK 13, N.Y. BOSTON 10, Mass. Open THUR. 'til 8:45 P.M.

110 Federal St. HUbbard 2-7850 Open MON.-WED. 'til 8:45 P.M.

BRONX 58, N.Y. FOrdham 7-8813 Open THUR. 'til 8:45 P.M.



OTHER LOCATIONS

542 E. Fordham Rd.





### NEW 299 COMPLETE STEREO AMPLIFIER

COMPLETE STEREO AMPLIFIER

Features dual 20 watt amplifiers and dual preamplifiers an ane chassis. Includes a 3rd channel autput for the ultimate in stereo reproduction. Has separate Bass and Treble controls for each channel; low level stereo cartridge Inputs for cartridges with exceptionally low outputs; Balance Control for precisely bolancing both channels; Master Volume Control with loudness switch for tonol bolance; Phose Reversal Switch: corrects reversed phosing on improperly made recordings; Master Function Selector switches to: stereo records to-level or hi-level cartridges, stereo FM/AM broadcasts, use af stereo cartridge for monaural records, for a monaural source through both amplifiers. Unit is also used as a monaural electric crossover, Inputs: 2 law-level, 2 high channel. Outputs: Tape recorder autput; center channel autput, and speaker impedance of 4, 8, and 16 ohms/ for each channel. Frea, Response: 20-30,000 cps. Power output per soction 20 watts, 40 watts peak; Harmonic Distortion: 0.8%; IM 0.3%. 11 tubes Size: 44" x x 15" x 12". Shep. wt., 35 lbs.

Net 199.95

Type C Steel Case

...9.95 19.95

### **NEW SCOTT 222** 24 WATT STEREO AMPLIFIER



This is a new 24 watt Sterea Amplifier (12 watts per channel) with numerous features found only on more expensive amplifiers. Dual preamps and control facilities provide complete flexibility in the control and reproduction of all stereo or monaurol sources. Outputs are available for sterea tape recording plus a third channel output for connection to onother amplifier to pravide the ultimate in stereo realism. Loudspeaker output impedances are 4, 8 and 16 ohms for each channel, inputs: 4 dual (3 high level, 1 law level) May High, Mag Low, Tuner, Tape Playback. Outputs: Tope Out (dual) Center Channel (single). Specifications: Frequency response; 20 to 20,000 cps; Harmanic Distortion; less than 0.8% at 12 wotts output; IM 0.3% (CCIF method); all aluminum chassis and DC an preamplifier tube heaters result in a hum level of 80 db below full autput: Phono sensitivity 3 mv for full autput; Size; 13½" wide x 5" high x 9½" deep. Shpg. wt., 24 lbs.

### **NEW BOGEN DB212** 24-WATT STEREO AMPLIFIER



With this "Stereo-Contral Center" you can precisely contral all stereo sources and feed them through the self cantained dual amplifiers to your specker systems. When you use manaural program sources you have 24 watts of power available to the speaker system. You can also feed one channel manaurally through the tweeter and mid-range speakers, and the other manaurally through the law range speaker. Output Power; 24 watts (twa 12 watt channels) peak power 48 watts. Harmonic Distortion: 0.5% at rated output. Frequency Response: 20 to 20,000 cycles ± 1 db. Speaker Output: 4, 8, and 16 ohms. Tone Controls: Bass ± 10 db of 60 cycles; Troble ± 10 db of 10,000 cycles. Controls: 4 position selector switch (tape, phano, radio, aux.); Function switch (Manaural: Channel 1, Channel 2, Channels 1 and 2; Stereophonic; normal, inverted). Valume; Bass; Treble; Hi-filter (flat, 4 kc). Lofister (flat, 100 cps). Speaker (2 position). Power anal, inverted). Tubes: (9) two 12AX7/7025, two 648, four 646GT, one 281. Dimensions: 15" W x 4½" H x 12½" D. For 110-120 V. 60 cycles AC. Shpg. st., 20 lbs. BOGEN BEG—Pearl-gray cabinet, with legs for DB212

Not 119.95 — 12.00 Down

BOGEN BEG—Pearl-gray cabinet, with legs for DB212

Not 7.50

#### NEW BOGEN DB230A 60-WATT STEREO AMPLIFIER

- SEPARATE BASS AND TREBLE FOR EACH CHANNEL
- DUAL VOLUME CONTROLS



### NEW! Jafayette 50-WATT STEREO AMPLIFIER MODEL LA-250

Impressive Performance... Handsome Styling . . . Another Unbeatable Lafayette




• 50 WATTS MONAURAL—25 WATTS EACH STEREO CHANNEL • RESPONSE 17-21,000 CPS ± 1 DB (at normal listening level) • UNIQUE "BLEND" CONTROL • PREMIUM EL86 **OUTPUT TUBES • SEPARATE BASS & TREBLE** CONTROLS ● CLUTCH-TYPE VOLUME-BALANCE CONTROL @ 3RD CHANNEL OUTPUT

COMPLETE STEREO AMPLIFIER

COMPARABLE TO AMPLIFIERS COSTING UP TO

### The Stereo 250



The Steree 250 ... a campletely new stereo high fidelity amplifier with a high quality of reproduction, remarkable versatility and new distinctive styling—worthy of a place in the finest stereo hi-fi music system. A full range of contrals enables you to enjoy the utmost in listening pleasure in any situation. A unique "blend" contral which provides cantinuously variable channel separation—from full manaural to full stereo—may be used to eliminate the exaggerated channel separation found in some stereo source material. Included is a clutch-type Volume Balance control for independent or simultaneous contral of both channels, cancentric Boss and Treble controls which provide independent tonal cantrol of each channel and a 4-position switch which selects phana, tuner, auxiliary or tope head stereo inputs. Simple slide switches provide channel reversal and phase reversal—or you can reproduce either channel through both amplifiers. A loudness switch permits the valume balance control to function as a compensated loudness cantral. The LA-250 also features a 3rd channel amplifier and speaker to provide a wider sound spread, a

Tape Output jack for recording purposes, plus dual terminations for 4, 8 ar 16 ahm speakers.

Advanced circuitry inclures DC operated preamp and tone cantral tube filaments for hum-free operation, premium 6CW5/EL86 push-pull output tubes, individual bias and balance adjustments an each channel and ohum balance control.

SPECIFICATIONS: POWER OUTPUT: 50 watts—25 per channel (speech & music rating). FREQUENCY RESPONSE: 17-21,000 CPS ± 1 db (at normal listening level). HARMONIC DISTORTION: less than 0.25%. IM DISTORTION: less than 1%. HUM AND NOISE: 74 db below rated autput at full valume (high level inputs), 54 db below rated autput at full valume (low level inputs). CHANNEL SEPARATION: Greater than 50 db. OUTPUT IMPEDANCE: 4, 8 and 16 ahms per channel.

Attractive beige vinyl lominated steel case. Handsomely designed brass anadized aluminum front panel. Sienno brawn molded legs and matching knabs with polished brass inserts. Dimensions with legs and knabs, 14½" w x 12½" d x 5½" h. Shpg. Wt., 26 lbs.

### THE #FISHER



### NEW! MODEL X-101A

COMPLETELY NEW! THE FISHER 600 STEREO FM-AM TUNER AMPLIFIER



STEREO MASTER CONTROL

AND DUAL 20 WATT AMPLIFIERS

Features separate 8ass and Treble cantrol for either ganged or independent channel operation. Has 12 inputs of pairs for stereo. 3 record-monitor jacks. 8 controls plus six chassis adjustments. Has input selector (78, 1P, RIAA-1, RIAA-2, Tape, Tuner, Aux-1, Aux-2); autput selector; (78v., Std., Channel A + 8, Channel 8 + A); rumble filter; Vol./AC power; channel balance; loudness; separate bass and treble for each channel. Frea. response: 20-20,000 cps. Distartion: 0.7% at rated autput. 50 db channel separation. Hum and naise inaudible. Sensitivity: 3 my farphono, 2 my for tape, 0.2v for high level to abtain rated autput. Less cabinet. Size: 15% x 4% x 13". Shps. wt., 30 lbs.

Model X-101A

Net 199-50

Model 10U, (Specify finish)

Designed far thase who want the convenience of an allinoace instrument, the new Fisher 600 incorporates a term of in-one instrument, the new Fisher 600 incorporates a stereo FM-AM Tuner, Master Audio Cantral and 40 Watt Stereo-Malfier on one compact chossis. Dual tuning arrangements permit the use of the unit as on individual for x 40 units are furnished for all input connections to the Fisher 600. The amplifier section features two well-designed 20 watt amplifiers section features two well-designed 20 watt amplifiers with colled in the Tuner: Cascode RF Stage on FM; Bridger Stages on F

HARMAN-KARDON "EPIC" A-250 STEREO AMPLIFIER



HARMAN-KARDON A-250 (less cage) ......Net 179.95

### LAFAYETTE FOR LEADING STEREO COMPONEN

### NEW! Lafayette 50-WATT COMPLETE STEREO PHONO SYSTEM

The Excitement and Realism of The Concert Hall!













You may substitute any of the above cartridges at na additional cast.

> LAFAYETTE FAMOUS

### COMPLETE STEREO SYSTEM

### YOUR **GUARANTEED BEST** STEREO SYSTEM BUY!

LAFAYETTE LA-250 50-WATT STEREO AMPLIFIER . . . 89.50 GARRARD RC121/11 STEREO CHANGER . . . . 41.65 NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE . 24.45 LAFAYETTE PK-111 WOOD CHANGER BASE . . . . . 2-LAFAYETTE SK-58 FAMOUS FREE EDGE 12" COAXIAL SPEAKERS at 29.50 . . . . . . . 59.00

Regular Catalog Price 218.55

### You Save 44.05

This superb system wift add a new dimension in living to your home with all the excitement and realism of a live concert. The new Lafayette LA-250 50-wait stereo amplifier (25 wotts each channel) forms the heart of this outstanding stereo hi-fi phonograph music system—the features, versalility and advanced circuitry of this unit are second to none—all the necessary inputs and outputs are peravided if you wish to add stereo tope and stereo FM/AM later. A unique blend control allows continuously variable channel separation—from full monaural to full stereo. Also included is the famous Garrard RC121/11 intermix 4-speed automatic recard changer with full monaural or automatic operation supplied with your choice of stereo cartridge,—the new GE VR-22 [.7 mil] diamond stereo cartridge, Fhere MTD [.7 mil] diamond stereo cartridge, Shure MTD [.7 mil] diamond stereo cartridge, Shure MTD [.7 mil] diamond stereo cartridge, Supplied with the Lafayette PK-111 wood base cut for the RC121 in your choice of finishes. These autstanding components are coupled with the 2-fomous free-edge Lafayette SK-58 12" Cooxial speakers with built-in crossover network and brillione level control. System supplied with plugs, cables and simple instructions. Shpg. Wt., 67 lbs.

HF-681. HI-FI STEREO PHONO SYSTEM with choice of cortridge and mahagany, watnut or bland changer bose (please specify). Net 174.50
17.45 Down 12.00 Monthly

MF-683. Some as MF-681, but with choice of 2-Lafayette Eliptallex Series Bookshelf Enclasures or 2-Lafayette Cob10 Series Resonator Enclasures (please specify cobinet model and finish.) Shap. Wt., 143 lbs. Net 229.95

22.79 Down 15.00 Monthly MF-684. Some as MF-681, except speakers furnished are 2-University 312. 12" 3-way speakers. Shap. Wt. 67 lbs. Net 237.50

23.75 Down 15.00 Monthly MF-685.

MF-685. Some as MF-684, but with choice of 2-Lafovette Eliptoflex Series Bookshelf Enclasures or 2-Lafovette CAB-16 Series Resonator Enclosures (please specify cabinet model and finish), Shpp. Wt., 143 lbs. Net 294.50

29.45 Down 17.00 Monthly

HF-682. STEREO AM-FM-PHONO SYSTEM: Some as HF-681 but including the new Lafayette LT-50 stereo tuner. Shpg. Wt., 85 lbs. Net 287.50 28.75 Down 17.00 Monthly







harman kardon


### HARMAN-KARDON MODEL TA230 STEREO FESTIVAL COMPLETE STEREO ELECTRONIC CENTER



Here is the most complete unit ever affered an ane single chassis. A complete streophonic electronic center: dual preamplistics. A complete streophonic electronic center: dual preamplistics with input facility and control for every steep function fixes with input facility and control for every steep function and another than the avoid of the power amplifier (15 worth each channel) employs four of the power amplifier (15 worth each channel) employs four of the power amplifier (15 worth each channel) employs four of the put impedance is 8 and 16 ohms. Friction-Clutch tone controls for boss and treble adjustments may be operated either seporate of the power apply for each channel or conventionally as gauged controls. D.C. heated preamplifier filaments insure freedom from hum. Silicon power supply provides superior transient response and supply sup

Net 259.95 25.99 Down Net 12.95 black display panel. Harman-Kardon TA230 (less enclasure) AC 30 Copper and Black metal enclosure Net 12.95
WW 30 Walnut or FW 30 Fruitwood hardwaad enclosure.
Net 39.95

HARMON-KARDON MODEL "LUTE" A220 STEREO AMPLIFIER



An amplifier designed to bring quality component stereo within the reach of everyone. The "lute" incorporates dual stereo preamps and two hum-free, distortion-free distortion of the control of the cont

LAFAYETTE LT-40 DELUXE FM-AM TUNER Specially Priced - Quantity Limited



● ARMSTRONG CIRCUIT ● AFC DEFEAT

AUTOMATIC FREQUENCY CONTROL

TEMPERATURE COMPENSATED OSCILLATOR

MEETS FCC RADIATION REQUIREMENTS

• FOSTER-SEELEY DISCRIMINATOR

A sensitive, selective, stable FM-AM tuner with all the basic features for a deluxe hi-fi system. FM circuit features Armstrong Circuit with limiter and Foster-Seeley Discriminator, and AFC. AM circuit is a superheteradyne with AVC. FM section: Sensitivity: 5 microvolts for 30 db quieting. Selectivity: 200 KC BW 6 db down. Frequency response: 20-20,000 cycles ± 1 db. AM Section: Sensitivity: 5 µv for 20 db S/N. Selectivity: 8 KC BW 6 db down. Frequency response: 20-5000 ± 3 db. Distortion: less than 1%. Hum inaudible. Controls: Tuning selector. AFC defeat, power. Has built in antennos. 6 tubes plus matched pair crystal diodes plus rectifier. Finished in attractive dark maroon and gold. Size: 13½ x 5% x 4-3/16". Shpg. wt., 10 lbs.

**NEW! HARMAN-KARDON** MADRIGAL ST350 STEREO TUNER



This latest Harmon-Kardan unit incorporates the most recent advances in sierea-tuner circuitry. The AM and FM front ends are completely separated for AM/FM simulcast (sterea) reception. Each section has its own highly efficient electronic bor tuning indicator and with the exception of the tuning function the instrument is operated entirely by push-buttons. Looking toward the future, Harmon-Kardan has provided for direct chasis installation of the MA350 Multiplex Adapter. FM section emplays an Armstrong circuit with zero time constant Gated Beam Limiter, Foster Seeley Discriminator, Automatic Frequency Control and Cathode Fallower Output. Sensitivity of 0.95 microvalts for 20 db quieting, 1.9 microvalts for 30 db permits reception of the most distant FM stations. AM circuitry incorporales on exclusive noise filter for noise-free lang distance reception, separate AVC circuit, 10kc whisstle filter, twa broad band If stages, and law noise. High Gain RF Pentade fallowed by a Pentagrid conver.er. Included is a built in Ferrite Loopstick with law impedance terminal for external antenna. Finished in attractive brushed copper with black display panel. Dimensions are 15% "W x 4%" H x 1724" D. Shg. wt., 26 bs.
HARMAN-KARDON 57350 AM-FM STEREO TUNER Net 199.95

MULTIPLEX ADAPTER HARMAN-KARDON MA350 COMPATIBLE STEREO



The MA350 is a plug-in stereo adapter designed expressly for use with the ST350 tuner to provide reception of the new Crosby compatible FM stereo broadcasts. Specifications are essentially the same as the MX20 multiplex adapter, the difference being the MA350 mounts easily within the tuner enclosure with signal and power requirements supplied by the tuner. tuner encrosure with the plied by the tuner.

HARMA N-KARDON MA350 MULTIPLEX ADAPTER
Net 49.95

HARMAN-KARDON MX20 SELF POWERED MULTIPLEX ADAPTER



This extremely stable unit is designed for use which do not provide space and power supply in" adopters. Completely self powered the MI plugs into any tuner with multiplex facilitis witched to Multiplex [if an MX20 adopter is the compatible stereo broadcast will be heartened. A convenient stereo dimension control the front excutcheed is provided for adjusting of stereo to optimum. SPECIFICATIONS volt, input Level 30 millisoft.

monic distortion maximum.

talk —40 db and French 15,000 cps. Tube

### NEW REVOLUTIONARY HIGH-FREQUENCY SPEAKER

### THE NEW LAFAYETTE Sphericon

HIGH FREQUENCY SUPER TWEETER




At long last the breakthraugh in High-Frequency Speaker design. Here is a tweeter with unequalled performance, engineered for todays high compliance stereo speaker systems. The Lofayette Sphericon represents a complete departure from Electrostatic tweeters, which are extremely inefficient — indeed so much so that it is often necessary to utilize an L-pad on the woofer in order to hear the tweeter properly, thereby lowering the efficiency of the waofer to the same level as that of the Electrostatic tweeter. In the case of many high compliance low effi-

ciency units this is disastrous, as an already inefficient speaker is made even less efficient. The Latayette Sphericon, due to its high sensitivity may be coupled to any speaker system with no loss in speaker efficiency. As a result less amplification is needed assuring lower distortion. Equipped with a built-in 3000 cycle crossover network the Sphericon produces a smooth linear response from 3,000 cps to beyond 40,000 cps; within plus or minus 1 db from 3000 cps. to supersonic frequencies. A specialty designed domed phenolic diaphragm delivers

THE MOST SIGNIFICANT ADVANCE IN TWEETER DESIGN OF THE STEREO AGE

- FREQUENCY RESPONSE FROM 3,000 CPS TO BEYOND 40,000 CPS.
- UNIFORM DISPERSION OVER 120° IN ALL DIRECTIONS
- HIGH-SENSITIVITY ALLOWS USE WITH ANY 4-16 OHM SPEAKER
- . UNIQUE DOMED PHONELIC DIAPHRAM
- POWER CAPACITY 30 WATTS
- REQUIRES NO HIGH VOLTAGE OR POWER SUPPLY



### 3 ELEMENT TWEETER

WAS 27.50 NOW ONLY



SK-150 Mahagany Finish SK-151 Walnut Finish SK-152 Blande Finish (Please specify finish)

Net 17.50

### RECOMMENDED

INSTALLATION ACCESSORIES

Select crossaver networks and L pads to match impedance

CROSSOVER NETWORK KITS

Consists of coils and condensers and detailed assembly instructions. Shpg. wt., 2 lbs.

KT-128—8 ahm crossover kit (for AR-1, AR-2 & KLH-6)
Net 2.75

KT-129—16 ohm crossover kit (for KLH-4)......Net 2.75

LAFAYETTE "L" PAD ATTENUATORS

VC-49—8 ohm (far AR-2 & KLHó) Shpg. wt., 6 az.
Net 1.49
Net 1.49 VC-50-16 ohm. Shpg. wt., 16 oz. .....

### NEVER BEFORE AT THIS SPECIAL LOW PRICE

LAFAYETTE SK-132 12" COAXIAL SPEAKER



CHECK THESE FEATURES!

- EXTREMELY FLAT FREQUENCY RESPONSE FROM 3s TO 16,000 CPS.
   WOOFER FREE-AIR CONE RESONANCE OF 40 CPS.
- 11/2 LB. MAGNET WEIGHT.
- ABSOLUTE MINIMUM DISTORTION.
  HANDLES 20 WATTS OF CONTINUOUS POWER.
  PERFECT FOR STEREO

Here is one of the greatest speaker values Lafayette has ever affered. Manufactured of the finest materials—clean, crisp response down to the lowest frequencies with the wasfer cone utilizing a shallow curved form thereby preventing deterioration of its superior characteristics resulting from sustained usage. The sturdily built voice coils made with fluoric banding agents and easily withstands high peaks. 8y mounting the tweeter slightly off center of the woofer, interference between the two are eliminated. Impedance: 16 ohms. Ships. wt., 13 lbs.

SK-132 12" COAXIAL SPEAKER ...

### NEW! LAFAYETTE SK-130 8" EXTENDED RANGE HIGH-FIDELITY SPEAKER



• FREQUENCY RESPONSE 40 TO 18,000 CPS.

15 OUNCE HIGH EFFICIENCY
 "ALCOMAX" MAGNET
 FLUX DENSITY 13,000 GAUSS

. I" VOICE COIL

Made with typical British craftsman-ship—this is one of the sweetest, smoothest saunding 8" speakers we have heard. A 15 ounce Alcomax ring magnet plus a hyperbolic cone are utilized to make it ideal for use at extension or midrange speaker— or utilizing two—just the thing for handling a full 15 Watts of power and pedance at 16 ohms. Shpg. wt., 3 lbs. DED RANGE SPEAKER......Net 11.95

SK-130 8" EXTENDED RANGE SPEAKER....



COMPRESSION HORN TWEETER WITH 2 or 3 WAY CROSSOVER



Versatility is the byward in this combination of the famous Lafayette SK-105 tweeter and LN-7 crossover. The Lafayette LN-7 db per octave crassover may be utilized as a 2-way at 500 cps or 3300 cps now-and in the future, by the addition of a mid-range speaker, it will become a 3-way, crossing over at 500 cps and 3300 cps. Rated at 20 watts of continuous power the Lafayette SK-105 tweeter will extend system response up to 16,000 cps. The very high flux density of 13,500 gauss guarantees excellent efficiency and essentially flat frequency response. Ruggedly built from a anepiece casting and carefully designed ta eliminate unwanted resonance in the audio range, its attractive styling permits maunting an top af the speaker enclosure or, aptionally, within the enclosure. Impedance 8-16 ahms. Shpg. wt., 5¼ lbs.

SY-364-Combination Tweeter and Crossover System

Shpg, wt., 5% lbs. SY-364—Combination Tweeter and Crossover System Net 16.50

LAFAYETTE Sphericon TWEETER AND ACOUSTIC RESEARCH AR-2 SPEAKER SYSTEM COMBINATIONS AT MONEY SAVING PRICES




- FREQUENCY RESPONSE 35 TO 18,000 CPS
- UNIQUE 8" WOOFER-MIDRANGE ASSEMBLY
- COMPRESSION HORN TWEETER
- . 6 DB PER OCTAVE ELECTRONIC CROSSOVER WITH LEVEL CONTROL
- SOLID 3/4" VENTED DUCT PORT BOOKSHELF ENCLOSURE

"Tricette"—The perfect blending of ottractive bookshelf cobinetry and advanced audia design (years ahead of other engineering effarts along these lines). The exceptional smoothness and cleanliness of the bass and midrange is the product of a unique 8" woofer-midrange speaker design employed in a solid %" acoustically lined vented duct port enclosure. Two separate cones are coupled through a cammon voice cail, with the auter edge of the midrange cone attached and floating on the flexible corrugated edges of the woofer cone. This results in a mechanical crossover with an absolute minimum of distortion, so that both cones aperate in phase at law frequencies, but only the midrange cone transmits the midrequencies. The heavy magnets provide high efficiency and excellent transient characteristics. Smooth extended high frequencies are brilliontly reproduced by use of a com-

pression harn tweeter utilized with an electronic crossover and level, control provided for balancing the system according to individual listening tottes. Impedance 8-16 ohms. Integrated power handling capacity 20 Watts. Dimensions: 23" W x 11½" H x 11½" D. Complete with easy to follow speaker installation instructions.

5Y-353 "TRICETTE" BOOKSHELF SPEAKER SYSTEM UN-FINISHED Net 39-95—only 3-95 DOWN SY-354 "TRICETTE" BOOKSHELF SPEAKER SYSTEM MA-HOGANY FINISH Net 42.50—anly 4.25 DOWN SY-355 "TRICETTE" BOOKSHELF SPEAKER SYSTEM WALNUT FINISH Net 42.50—only 4.25 DOWN SY-356 "TRICETTE" BOOKSHELF SPEAKER SYSTEM OILED WALNUT FINISH Net 42.50—anly 4.25 DOWN SY-357 "TRICETTE" BOOKSHELF SPEAKER SYSTEM BLONDE FINISH Net 42.50—anly 4.25 DOWN SY-357 "TRICETTE" BOOKSHELF SPEAKER SYSTEM BLONDE FINISH Net 42.50—only 4.25 DOWN



### **NEW! 61/2" COAXIAL SPEAKER**

- FOR EXCELLENT HI-FI SOUND ECONOMICAL & A SPACE-SAVER FOR STEREO
  - RESPONSE 50-16,000 CPS! BUILT-IN CROSSOVER NETWORK

. LARGE, HEAVY MAGNETS

• LARGE, HEJ

An excellent speaker, with all the best features of cauxial design, especially recommended for use in stereo high fidelity systems where space and/or cost are factars. The δ½" woofer is provided with extro-heavy large magnets for good power sensitivity and law distortion; the 2" tweeter is a separate speaker coaxially maunted in a housing which completely seats off back radiation and with a mesh dispersion screen to provide smooth, wide-angle-dispersion high frequency response. The built-in electrical crossover

contributes to the overall smooth tonal response of 50-16,000 cps. Woofer resonance is 70 cps; voice coil inforpedance is 8 ohms. Color-coded, screw-type terminals. Requires 51/" diameter cutout. Mounts with 4 equally-spaced holes. Size is 61/4" diam., 31/4" deep. Shpg. wt., 31/4; lbs.

Only 12.95 Net

GET 2 FOR STEREO





ONLY

FOR

### LAFAYETTE SPACE SAVER SPEAKER ENCLOSURE

ONLY 9.95

COMBINATION





FITS INTO BOOKSHELF PERFECT FOR STEREO PERFECT FOR STERECT

by careful Lafayette planning can result in such a lady enclosure priced so low! A beautifully built cabit with smooth, shining finish available in mahagany, laut or striking blande, this enclasure will match any e of room decor. Ruggedly constructed af 1/2" wood et, top and batlom 1/2" wood front and bock. Sturdy sugh to withstand even very high valume levels without rating. This handsome enclasure has a thousand and a uses. These units make the ideal two or three-channel roo system or can be used to supplement existing stakers either as tho second channel speaker, or as a large of the second channel speaker, or as a speaker for better balance. Ideally suited ker in sterea table-model phanographs. By for stereo use, this enclasure rever a small hi-fit speaker is second.

DEAL SPECIAL PRICE

Brought To You By Lafayette Research— ELIPTOFLEX Engineered To Set A New Standard Of Speaker Enclosure Excellence

> • NOW IT IS POSSIBLE TO HAVE ALL THE ADVANTAGES OF A HIGH EFFI-CIENCY SPEAKER IN A BOOKSHELF SIZE ENCLOSURE . NEWLY DESIGNED ELIPTICAL PORT BROADENS FREQUENCY RESPONSE AND PROVIDES BETTER TRANSIENT RESPONSE . NEW DIFFRACTING RING ELIMINATES CANCELLA-

## TION EFFECTS BETWEEN FRONT AND REAR RADIATION

### THE

### **ELIPTOFLEX**

**NEW! LAFAYETTE** SK-127 12" COAXIAL **SPEAKER** WITH DUAL **WIDE- ANGLE TWEETERS** 

- FREQUENCY RESPONSE
  40-16,000 CPS
  HIGH QUALITY
  SEAMLESS CONE
  BUILT-IN CROSSOVER
  NETWORK WITH
  BRILLIANCE LEVEL CONTROL
  HEAVY DUTY CONSTRUCTION

HEAVY DUTY CONSTRUCTION

This speaker must be considered as one of the foremost high-fidelity values today. Its tonal quality and features equal that of speakers many times its price. The woofer section is constructed of a one piece seamless cone with a 1½" voice coil set in a rigid non-resonant frame. Employing a unique dual cone wide-angle tweeter assembly dapproximately 125 horizontal dispersion angle which electrically crosses over at 2500 cycles. A brilliance level control is provided making it possible to vary tweeter level according to personal taste. The speaker has an overall frequency response of 40-16,000 cps. Voice coil impedance 8 shows. Shop. wt., 8 lbs. SK-127 12" COAXIAL SPEAKER

### SPECIAL COMBINATION



Now you can abtain what is conceded to be the greatest performance value on the hi-fi market—and save up to 29.50. Avoilable with either SK-111 15" 3-way speaker with 174 lb. magnet or SK-113 3-way with 375 lb. magnet. These are both highly efficient integrated 3-way speakers made by world renowmed Goodmans of England. Supplied complete with genuine 12 db/octove crossover network with L-pad high frequency level control.

The enclosure is the renowmed Lafayette bass reflex in either highbay or lowboy stying and in a choice of manhagany, wolnut or blande. Solidly constructed of 36" stock, these units have picture frame moldings, attractive plastic grilles, topered legs, brass ferrules, internal occustic linings, and are finished in genuine wood veneers. Size of lowboy (less legs) 28%" w x 231/5" h x 164%" d. Some size for highbay with height and width interchanged.

WHEN ORDERING, SPECIFY CHOICE OF BOTH: STYLE — HIGHBOY OR LOWBOY FINISH—MAHOGANY, BLONDE, WALNUT

SY-281 SK-T11 15" with 1½ lb. mognet 3-WAY SPEAKER & ENCLOSURE COMBINATION—Net 89,50 Down 5Y-338 SK-113 15" with 3½ lb. mognet 3-WAY SPEAKER & ENCLOSURE COMBINATION—Net 99,50 Only 9,95 Down

THE PROBLEM: With the odvent of stereo, the use of two massive unwieldy specker systems became unfeasible in most of today's combination living roam—music roam creas. One answer to this problem was the air-tight bookshelf speaker systems of which there are many oxcellent variotions. However this design is inherently inefficient and requires costly high wottage amplification. THE SOLUTION: The "Eliptoflex" is the lotest development from Lafayette's acoustic laboratories, It is the result of an intensive research program to develop a bookshelf enclosure that may be utilized with any efficient 12" full range, coaxid or triaxial speaker, it may also be used with o 12" woofer, separate hewefer and crossover. Utilized with a proper speaker the "Eliptoflex" achieves a degree of natural smoothness coupled with low distortion and o rich, robust bass hitherto found only in large speaker consoles or inefficient bookshelf systems many times its price powered by large amplifiest. With the "Eliptoflex" there is no need for costly high wattage amplification due to its highly efficient design characteristics.

Comporative laboratory and listening tests indicate that "Eliptoflex" performance is demonstrably superior throughout the audio spectrum.

The "Eliptoflex" is beautifully finished in a voriety of hordwood veneers for attractive room placement. Dimensions are 14" H x 23-7/16" W x 13-5/16" D.

CAB-41WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE [mohagony] Shap, wt., 24 lbs. Net 32-50

CAB-42WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE [woinut] Shap, wt., 24 lbs. Net 32-50


CAB-32WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE [blonde] Shap, wt., 24 lbs. Net 32-50

CAB-52WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE [ciled woinut] Shap, wt., 24 lbs. Net 32-50


CAB-52WX "ELIPTOFLEX" BOOKSHELF ENCLOSURE [ciled woinut] Shap, wt., 24 lbs. Net 32-50

CAB-48WS SET OF WOOD BUNNER FEET FOR CAB-44

(oiled wolnut) Shpg. wt., 24 lbs. Net 32.50
CAB-44W SET OF WOOD RUNNER FEET FOR CAB-41
Net 1.45 



STOCK = ENCLOSURE

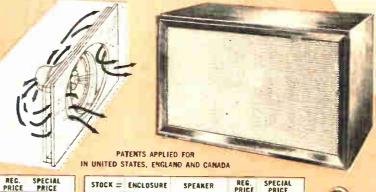







SPEAKER

STOCK =	ENCLOSURE	SPEAKER	PRICE	SPECIAL PRICE
\$¥-320WX \$¥-321WX	CAB-43WX CAB-52WX	UNIVERSITY 312	104.04	89.50 ea. 173.00 for 2
SY-322WX SY-323WX SY-324WX SY-325WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	UNIVERSITY UXC-122	67.29	59.95 ea. 113.00 fer 2
SY-326WX SY-327WX SY-328WX SY-329WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	JENSEN H223F	105.00	89.95 ea. 175.90 for 2
SY-330WX SY-331WX SY-332WX SY-333WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE 12TRXB	97.10	82.50 ea. 159.00 for 2
5Y-334WX 5Y-335WX 5Y-336WX 5Y-337WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE SP12B	66.80	59.95 ea. 113.00 for 2













### EW! LAFAYETTE SK-125 HI-COMPLI-ANCE 3-WAY SPEAKER SYSTEM 8" Woofer – 6½" Mid-Range 2½" Tweeter



- HIGH COMPLIANCE SPEAKERS
- VARIABLE BALANCING CONTROL
- FREQUENCY RESPONSE FROM BELOW 35 TO 18,000 CPS
- SOLID VENTED, DUCTED-PORT TYPE ENCLOSURE PERFECT FOR STEREO

Lofoyette has succeeded in achieving a standard of per-formance formerly associated only with very large speaker systems. This complete 3-way speaker system, incarpo-rates advanced Mi-Compliance speaker design in an extra rotes advanced Mi-Compliance speaker design in an extra rigid vented, ducted-port type enclosure, lined throughout with acoustic material. The natural, full boss, faithful mid-ronge and clear sparkling highs are startling from a speaker system of such smalt proportions. Employing a 3-way LC crossover network with a variable 10-position balancing control, it is possible to match the speaker system to individual raom acaustics and listening tostes. Frequency response is from below 35 to 18,000 cps. with a power handling control, at 55 match. power handling capacity of 25 wotts. Impedance 8-16 ohms. Finished on all 4 sides in attractive hand-rubbed mahagany or walnur veneers (please specify). Dimensions are 24"W x 11"H x 10%"D. Shpg. wt., 26 lbs.
5K-125 HI-COMPLIANCE 3-WAY SPEAKER SYSTEM SET OF 2-5K-125 SPEAKER SYSTEMS FOR STEREO



Only 9.80 Down 8.00 Monthly

### A SMALL MIRACLE FROM LAFAYETTE - THE NEW SK-124 **ULTRA-COMPLIANCE MECHANICAL** 2-WAY SPEAKER SYSTEM

- FREQUENCY RESPONSE 40-16,000 CPS
- ESPECIALLY DESIGNED VENTED, TUNED, DUCT TYPE ENCLOSURE
- UNIQUE MECHANICAL 2-WAY SPEAKER WITH EXTRA HEAVY MAGNET
- EXCELLENT FOR STEREO

OUTPERFORMS SPEAKERS DOUBLE LAFAYETTE'S LOW PRICE



SK-124 MECHANICAL 2 WAY SPEAKER SYSTEM Specify SET OF TWO SK-124 SPEAKER SYSTEMS FOR STEREO




Lofovette has indeed wraught e small miracle in engineering such acoustic excellence into so small o package Smooth, distortion free response with a deep fundomer bass and clean pure highs that give no indication of small size and price. The perfect speaker for that high quality installation in your home, affice ar restaurant—two are ideal for stereo.

The speaker features unique dual cone construction with extra heavy magnets. Both tweeter and woofer "float" on flexible, carrugated edges with the outer edge of the tweeter cone attached to the mid-settion of the woofer cone. This results in a mechanical crossover so that both canes operate in phase of low frequencies, but only the tweeter cone operates at high frequencies, but only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, but only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, the only the tweeter cone operates at high frequencies, the same type of wide-range frequency response of 40-10,000 cps. Impedance 8-16 ahms. Cabinet is finished on 4-tides in hand-rubbed mahogany and walnut for attractive horizontal ar vertical placement anywhere in the room. Dimensions are 10% of the finished on 4-tides in hand-rubbed mahogany and walnut for attractive horizontal ar vertical placement anywhere in the room. Dimensions are 10% of the finished on 4-tides in hand-rubbed mahogany and walnut for attractive horizontal ar vertical placement anywhere in the room. Dimensions are 10% of the finished on 4-tides in hand-rubbed mahogany and walnut for attractive horizontal ar vertical placement anywhere in the room.

### AN EXCITING NEW SPEAKER DEVELOPMENT

### **OUTSTANDING VALUE!I** LAFAYETTE AUDIO CABLE ASSEMBLIES



A high quality single conductor shielded cable consisting of a straight molded RCA type phona plug at one end with stripped and tinned terminators at the other end. Perfect for interconnecting phonographs, tuners, amplifiers, and high impedance micraphanes.

MS-573 36" RCA type phana plug to stripped and	
tinned ends N	et .34
MS-574 48" RCA type phona plug to stripped and	
tinned endsN	et .36
MS-579 60" RCA type phona plug to stripped and	
tinned endsN	of .39
MS-576 72" RCA type phano plug to stripped and	•
tinned endsN	et .41
MS-577 144" RCA type phana plug to stripped and	4
tinned endsNo	et .69

### **SALE!**



- MOLDED FROM HI-IMPACT PLASTIC
- BRASS SCREW AND SHAFT INSERT
- ACCEPTS UP TO 1/4" ROUND OR FLAT SHAFT

Yau'll want these trim distinctive, functionally styled knobs to add a custom or professional appearance to your HI-FI, Ham, Test and Experimental Equipment. Finished in an attractive steel gray and malded from tough hi-import plastic, the knob is of cylinder design with sure-grip fluted sides and an aluminum ring-set in a recessed foce. Rugged brass screw and mounting shaft insert will accept up to ¼" round ar flat shaft. Each kit contains 5 knobs.

55 Size: 1% Diameter % Deep	Net .87
<b>56</b> Size: 1%" Diameter 11/16" Deep	Net .79
\$7 Size: 1" Diameter 11/16" Deep	Net . <b>. 69</b>

### LAFAYETTE SCOOPS THE TAPE RECORDER INDUSTRY THE NEW LAFAYETTE **RK-103 DUAL SPEED** TAPE RECORDER

PROFESSIONAL QUALITY AT A PRICE YOU CAN AFFORD!





### afayette Presents


### **THE NEW ULTRA-LINEAR SK-128 FULL RANGE 8-INCH DUAXIAL** SPEAKER WITH NEWLY DEVELOPED TWEETER BAFFLE DESIGN.

■ 40 TO 16,000 CPS—FLAT WITHIN 3 DB ■ HIGH EFFICIENCY - HIGH EXCURSION WOOFER WITH UNIQUE "CONICAL STIFFENER" # HANDLES HEAVY **BASS PASSAGES WITHOUT "DOUBLING"** 

Eccentric Tweeter Mounting & Unique Elliptical Baffle Completely Eliminates Interaction Between Woofer & Tweeter

The SK-128 combines the best features of a multiple specker system in one compact and ecanomical unit. It offers full, even coverage of the entire audible range, with no distortion or coloration to mor your listening pleasure. The specially treated woofer cone has a unique "Canical Stiffener" at the apex which, coupled with Its high compliance, enables the cone to aperate in a piston-like manner—delivering a cleen, powerful bass response. The 2-inch tweeter has its own voice cail and magnetic field. Special treatment of cane and cone edge provides even distribution at the high frequencies, with no peaks or resonances. The unusual off-center mounting of the tweeter and its eliptical baffle minimizes interaction between tweeter and woofer and insures an overall response free of intermodulation distartion. Electrical crassover from the woofer cane to the tweeter unit is provided by a

built-in network. An adjustable brilliance control permits matching of saund to roam occustics. Efficiency of the speaker is such that it will operate from any amplifier with an output of 1 watt or more. Installed in a bastreflex type of enclosure, it performs outstandingly, and is recommended for all high-quality music systems—whether manaural ar stereophonic. SPECIFICATIONS: Overall Response: 20-20,000 cps (40-16,000 cps ± 3 db). Free air Resonance: 45-65 cps. Impedance: 8 ahms. Pawer Rating: 20 watts Integrated Program Material. Crossover: 2500 cps. Overall Diom. 8-5/32". Overall Depth: 5-17/32". Baffle cut-out: 7-1/32". Rugged, vibration-free speaker frome with color-coded screw-type terminals for quick, easy connection of amplifier leads. Shpg. wt., 5 lbs. SK-128 Full Ronge 8" Duaxial Speaker ..........Net 19-50

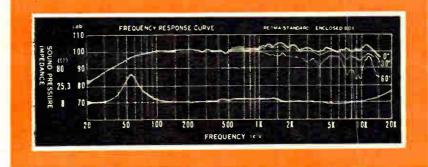

### LAFAYETTE MINI-DUCT BOOKSHELF ENCLOSURE WITH SK-128 8" ULTRA-LINEAR SPEAKER

The perfect answer for those who demand realistic sound reproduction even where space is limited. Two of these systems are ideal for stereo.

SY-343WX Speaker System in Walnut	Net 39.50
SY-344WX Speaker System in Mahogany	Net 39.50
SY-345WX Speaker System in Blande	Net 39.50
SY-346WX Speaker System in Oiled Walnut	Net 39.50
SY-347WX Speaker system in unfinished birch	Net 37.50



TWEETER BAFFLE



- PUSH-BUTTON CONTROLS DUAL SPEED TWIN SPEAKER
- TAPE INDEX COUNTER WIDE RANGE FREQUENCY RESPONSE
- SIGNAL TO NOISE RATIO BETTER THAN 40 DB
- WOW AND FLUTTER LESS THAN 0.35%

its it! We are not at liberty to divulge the same of this instrument's monufacturer, are confident that its features will speak for rugged fool proof push-button contrais for rewind, farward and stop. Automatic intering makes it impossible to accidentally erase, tape. Dual speeds—7½ and 3½ ips. Read to facilitate recording. Fost forward and in 80 seconds. Accepts 7" reel size. Twin

20,000 OHM PER VOLT MULTITESTER

• 20,000 OHMS PER VOLT DC SENSITIVITY

• 10,000 OHMS PER VOLT AC SENSITIVITY • 40 MICROAMPERE 3" D'ARSONVAL METER

MOVEMENT HIGH INPUT RESISTANCE ON ALL DC &

A new multitester with extra-luxury features, at a down-to-earth price. Here is the ideal all-purpose multitester for trouble-shooting. Uses a sensitive, rugged 40 micra-ampere basic meter, a d'Arsonval movement with jewelled beorings. Input resistance 20,000 ahms per valt on DC; 10,000 ahms per valt on DC; 510,000 ahms, 0.500 micro-amperes, 0.10.250 milliamperes, —20 to +36 decibels, PLUS two special ranges 0.5000 henrys inductance and 250 mmf to .02 mfd capacity. Size 3½" x 5½" x 1½". ONLY 13.50 250 mmf to .02 mfd capacing Shpg. wf., 3 tbs.

11.95 TM-66

### STEREO AUDIO **ANALYST SINGLE** NEEDLE-DUAL **CHANNEL VU** BALANCE METER

● UNIQUE TWO COIL GALVANOMETER TYPE
PRECISION METER MOVEMENT ● SEVEN RANGES
OF METER SENSITIVITY ● EFFORTLESS BALANCING OF STEREO SYSTEMS ● PROVISION FOR
USE AS VU METER AND TAPE RECORDER LEVEL
INDICATOR ● MAXIMUM METER SENSITIVITY
120 MG

The TM-66 provides the solution to all stered balancing problems. This unique precision meter movement utilizes perceived the superate coils set in a single magnetic field. Each stereo channel feeds a separate coil through a full wave bridge rectifier. When both signols are equal and balanced the resultant deflection on the scale will measure 0. Unlike conventional stereo indicators having two unrelated mavements, calibration of one meter against the ather (channel A vs. channel B) is unnecessary. Since the twa separate A vs. channel B) is unnecessary. Since the twa separate coils interact within a single magnetic field, the single meadle movement acts upon channel A and channel 8 simultaneously, automatically maintaining the unit in constant calibration. Individual channels may be measured by TM-66 Audio Analyst.

#### NEW GENERAL ELECTRIC STEREO AMPLIFIERS



#### MODEL MS-2000 "STEREO CLASSIC" 28-WATT STEREOPHONIC AMPLIFIER

28-WATT STEREOPHONIC AMPLIFIER
This Integrated stereo amplifier combines high quality stereo performance with striking cabinet design. Consists of 2 power amplifiers and 2 preamp control units on a single chassis. Front panel controls include: Input selector—stereo tape head, monaural phono, stereo phono, stereo tuner, auxiliary; Speaker mode selector-stereo, channel reverse, monaural; Volume; Contour; Balance; Bass; Treble; Rumble filter; Power on-oft; Tuner level set. Inputs (with sensitivity figures): Stereo Cartridge (3.5 mv); Tuner (200 mv); Auxiliary (200 mv). Outputs: Dual speakers—4, 8, 16 ohms; Dual output jacks; 2 a.c. outlets, one controlled. Power Output: 28 watts total, 14 watts per channel in stereo operation. Frequency Response: 20 to 20,000 cps ± 0.5 db. Harmonic Distortion: below 1% stereo operation, at full output. Hum and noise:—55 db (phono);—73 db (high level). Channel Separation: at least 40 db between 30 and 20,000 cps. Tubes: 2-7025/124X7; 2-124X7, 2-688A8; 4-6V6GT; 1-5V4GA; 1-full wave selenium rectifier. Cabinet finished in leather grain willow gray vinyl; Front panel features a silver and willow gray color finish. Size, 15x12x5½%". For 110-117V, 60 cps AC. Shpg. wt., 15 lbs. Model MS-2000



#### MODEL MS-4000 "STEREO CLASSIC" 40-WATT STEREOPHONIC AMPLIFIER

AUPLIFIER

New compactly designed stereo amplifler, carefully engineered to fulfill the need for a top quality unit at a modest cost. Output power is rated at 40 watts total; 20 watts per channel in stereo operation. Frequency Response: 20 to 20,000 cps ± 0.5 db. Harmonic Distortion below 1% at full output, stereo operation. Hum and Noise: -62 db (phono); -73 db (high level). Channel Separation: better than 40 db between 30 and 20,000 cps. Front Panel Controls include: Input selector—stereo tape head, monaural phono, stereo phono, stereo tuner, auxiliary; Speaker mode selector—stereo, channel reverse, monaural together; Volume; Contour; Balance; Bass; Treble; Rumble filter; Power on-off; Tuner level set. Also a rear panel speaker phasing switch. Inputs (with sensitivity figures): Stereo cartridge (3.5 mv); Stereo tape head (3.mv); Monaural cartridge (3.5 mv); Stereo tape head (3.mv); Monaural cartridge (3.5 mv); Tuner (200 mv); Extra (200 mv). Outputs: Dual speakers—4, 8, 16 ohms; dual output jacks; 2 AC outlets, one controlled. Tubes: 2-7025/12AX7; 2-12AX7; 2-6BA8A; 4-64973; 1-GZ34/5AR4; 1-6K4; 1-selenium bridge rectifier. "Flat" cabinet finished in leather grain willow gray vinyl. Panel features a silver and willow gray color pattern finish. Size, 15 x 12 x 5½%. For 110-117 V, 60 cps AC. Shpg. Wt, 17 lbs.



### MODEL RG-1000 "STEREO CLASSIC"

MODEL RG-1000 "STEREO CLASSIC"

REMOTE CONTROL UNIT

Provides the important stereo central remote control functions of channel balance and volume control—up to 30 feet from the controlled amplifier, deally suited for use with the GE MS-4000 or MS-2000, or as a remote volume control with a monaural amplifier, or for volume and balance control with a pair of monaural amplifiers used for stereo. Superb styling with ebony-finish base and knobs, textured aluminum face plate, and chrome trim. 5½" w x 2¼" d x 1¾" h; with 30-foot output cable. Shops. Mt., 2½ libs.

Shpg. wt., 21/2 lbs. GE RG-1000 Remote Stereo Control .

### NEW GENERAL ELECTRIC FM-AM TUNER MODEL FA-12



The new GE Model FA-12 FM-AM Tuner offers an unusual combination of excellent audio performance and trim, highly-compatible appearance design, for use with virtually any amplifier in a custom high fidelity system. This tuner features high sensitivity, precision tuning, ability to receive weak signals with minimum distortion, and an unusually low hum and noise level. Frant Panel Controls: Tuning (flywheel), Selector switch with Off, AM, FM, FM (AFC) positions. Specifications: AM Sensitivity-200 NV per meter for 20db tignal-to-noise ratio; FM-5NV for 30db quieting. AM Selectivity-7kc bandwidth, 6db down; FM-200kc bandwidth, 6db down; FM Distortion—less than 1.5% harmonic at rated output—less than 2% IM. Noise—FM, 53db below 100% modulation—AM, 45db below 100% modulation. Response—FM, ±2db af the standard de-emphasis curve; AM, 25db dawn at 10kc ta minimize whistle interference. Audia Outputs—3 Lowimpedance cathode follower type; 1 high, 1 low, 1 Multiplex, Antenna Inputs—FM, 300 ahm (folded dipale antenna supplied); AM, built-in ferrite rod antenna, terminal for external antenna. FM drift is negligible with AFC, and spurious radiation certified as meeting FCC requirements. Tuning Range—FM, 88 to 108m; AM, 535 to 1620kc, Tuning Meter—Duot purpose for precise FM center tuning and AM maximum signal funing. Overalt dimensions—15-1/32" W x 5½" H x 10½" D, Shps. wt., 15 lbs. For use with 110-120 voits 60 cycles AC.

FA-12 (willaw gray vinyl cabinet with gray and occupate) Net 129.95 let FA-10 (saddle brawn vinyl cabinet with br

### "COMPATIBLE" PHONO MUSIC SYSTEM STEREO and LP MONAURAL

Plays Stereo and Monaural Records

### LAFAYETTE SUPER-VALUE HIGH FIDELITY "TWINS"







### **NEW! FM TUNER** Ready for Stereo!

47.50 WITH CAGE ONLY 5.00 DOWN - 5.00 MONTHLY

● MULTIPLEX OUTPUT FOR FM MULTIPLEX STEREO ● NEW EM80/6BRS "PIN-POINT TUNING" EYE . FULL ARMSTRONG FM CIRCUITRY . DRIFT-FREE AUTO-MATIC FREQUENCY CONTROL . 44V FM SENSITIVITY

An outstanding new FM tuner designed to receive standard FM or FM multiplex stereo with a high degree of sensitivity for "pulling in" even distant stations with excellent "quieting" and with good selectivity for separating strong local stations ond weak distant stations. Hos a multiplex output jock\_ready for use with a multiplex decader (when available) for FM multiplex stereo. Can be used for standard FM reception, or with your AM radio for AM/FM stereo, or 2 units can be used for FM/FM stereo (which promises to be a not-too-distant development). Features include: SEMSITIVITY: 4 microvalts far 20 db quieting, 7 µr for 30 db; FREQUENCY RESPONSE; 20-20.000 cps ± 1 db; DISTORTION: Less than 1%; AUTOMATIC FREQUENCY CONTROL (AFC); With defeat switch to permit funing in distant stations adjacent, on the dial, to strong local stations; FM DRIFT: Maximum ± 5 kc; HUM: 60 db below 100% modulation; OUTPUTS: Standard Audio, Multiplex, Tope Recorder; OUTPUT LEVEL: 2½ volts for 100% modulation: CIRCUIT: Armstrong type, with limiter and Foster-Selevi discriminator; TUNING EYE: EMB/06878 for pinpoint tuning of stations; BUILT-IN ANTENNA: Line card type, with provisions for external antenna in "fringe" areas. TUBES: 6018, 6860, 12AT7, 2-6AU6, 6A18, EMB/06878; selemium rectifier. For 105-120 volts, 60 cps AC, Styling is modern, with gold-finished remayable front panel and black metal cobinet with rubber feet. Size is 14½ "w x 8-3/16"d x 4½"h. Sheg. wt. 13 lbs. Nat 47.50

LT-75-FM Tuner, Complete with Cage

### NEW! LA-45 14-WATT AMPLIFIER 39.50 Only 5.00 Down!

New! LA-45 14-WAII AMPLIFIER 35.3U UNIY 5.0U DOWN!

The Latoyette LA-45 is a complete 14-wort amplifier with built-in preemplifier acqualizer with wide range frequency response and low hum and distortion to ensure sparkling reproduction that will delight you. This undistorted power is achieved from circuitry employing the new premium quality EL84 tubes in a pentade-connected boll-anced autput circuit. 5 inputs are provided for every type of crystal, ceramic or magnetic phono cartridge, for tuner and tope head as well as high level auxiliary input. The front panel function selector and equalization switch gives instant chaice of tuner, aux, or phono with proper equalization for all types of recards, and haft tope head. Equalization positions are RIAA [LP], POP for 78 pm records, and NART tope head equalization. A "Monitar" jack and switch permit tope monitoring, provide a high level signal for tope recording, or allaw plug-in use at the new sterea adapters. Other features include a 12 db per actave rumble filter, an auxiliory AC receptacle, provision for mounting in cobinet or on a console ponel, attractive finish that blends hormoniously with both modern and traditional decor, and a power on-off pilot light. Its appearance motches the Lafayette LT-75 tuner. It comes complete with removable case.

SPECIFICATIONS

POWER: 14 waits normal, 28 waits peak, FREQUENCY RESPONSE: 30-20,000 cps 
1 db. IM DISTORTION: Less than 1½% (60 and 7000 cps) at full output. HUM: 
Tuner 80 db, phono 60 db belaw full output. INPUTS: Crystal phono, tuner, magnetic 
phono, tape head, oux. OUTPUTS: Monitor, speaker (8 and 16 ohms). CONTROLS: 
Function selector and equalization, bass, treble, loudness with AC an-off switch, 
manitor on-off switch, rumble filter on-aff switch. RUMBLE FILTER: 12 db per actave 
below 100 cps. EQUALIZATION: RIAA (1P), POP (78), TAPE HEAD (NARTS). TONE 
CONTROLS: 12 db cut or boast an bass or treble. INPUT SENSITIVITY: For full 
autput: ½ valt for tuner, crystal or oux; 2.7 millivolts for magnetic phono or tape 
head. DAMPING FACTOR: 10. TUBES: 2:12AX7, 2-EL84; E281 (rectifier). AC OUTLET. MOUNTING: Cobinet or panel. SIZE: 13½" long x 6½" d x 4½" h including 
bumper feet. Knobs extend ½" in front of panel. SHIPPING WEIGHT: 15 lbs.

Na 39-50 Net 39.50

### MONAURAL SYSTEM TO PLAY BOTH STEREO AND MONAURAL RECORDS

### CONVERT TO COMPLETE STEREO LATER



COMPONENTS LAFAYETTE LA-45 14-WATT COMPLETE AMPLIFIER 39.50 GARRARD RC-121 4-SPEED RECORD CHANGER 41.65 NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 24.45 LAFAYETTE 5K-58 12" COAXIAL SPEAKER LAFAYETTE PK-111 WOOD BASE 3.95 139.05

### HIGH FIDELITY PHONO SYSTEM

Play Stereo & Monaural Records, Monaurally, Now-Add Complete Stereo Later

REGULAR PRICE -139.05 **SAVE 31.55** 

An economical high fidelity system with outstanding performance features for highly-satisfying tone quality. It's all ready for stereo; conversion will involve only a few easy interconnections. Includes the new Lafayette LAS.

14-Watt amplifier, with frequency response of 30-20,000 cps. and with "Monitor jocks for plug-in use of a stereo adapter when desired; the Gorrard 4-speed automatic record changer Model RC-121/II all set for stereo when-ever you're ready: The new GE VR22 (7. MIL) Diamond Stereo Cortridge engineered for virtually hum-free performance with a frequency response from 20 to 20,000 cycles. For both stereo and microgroove LP and 45 rpm records; the Lafayette PK-111 wood changer bose, of fine, selected veneers; and the world famous Lafayette SK-58

Coaxial 12" speaker with "Brillionce" high-frequency

SELECT VOILE OWN.

CANTENDEE

ONLY 10.75 DOWN—10.00 MONTHLY

Control 10.5120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-120 volts 60 cycles AC. Shpg. wt., 55 lbs.

For 105-1

YOU PAY 107.50 ONLY 10.75 DOWN-10.00 MONTHLY

SELECT YOUR OWN CARTRIDGE

You may substitute the Shure M7D, Pickering 371.7D or the new Electro-Voice 31MD7 in any system shown with the GE VR-22 at no additional cost.

### COMPLETE HARMAN-KARDON FM-AM STEREO-PHONO SYSTEM 50-Watts (25 Each Channel)



HARMAN-KARDON

HK250 50 WATT STEREO

CHANNEL)

HARMAN-KARDON TP200 STEREO TUNER & CONTROL



UNIVERSITY 31:

TRIAXIAL SPEAKERS



GE VR-22 1.7 MILI DIAMOND STEREO CARTRIDGE



ELIPTOFLEX ENCLOSURES

### SPECIALLY PRICED! SAVE OVER 30%

HARMAN-KARDON TP200 STEREO TUNER & CONTROL CENTER 189.95 HARMAN-KARDON HK250 50 WATT STEREO

AMPLIFIER (25 EACH CHANNEL) GLASSER-STEERS GS-77 (less base)
GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 24.45 2-UNIVERSITY 312 TRIAXIAL SPEAKERS @ 71.54

143.08 Regular Catalog Price \_516.93

99.95

59.50

YOU SAVE 127.43 YOU PAY

389.50 38.95 Down

24.00 Monthly

HF-630 Stereo system as illustrated. Shpp. wt., 85 lbs. Net 391.95 Recammended enclosures for the HF-630 system are the: Lafayette Eliptoflex series Boakshelf Enclosure or CAB-16 Series Resonator Enclosure. (Please specify finishes).

HF-631 same as HF-630, but with 2-Lafayette SK-114 12" with 6½ 1b. magnet 3-way speakers and 2 Lafayette Eliptoflex Series Enclasures. Shpg. wt., 133 lbs. Net 487-95

48.79 Dawn 27.00 Monthly

MODEL G5B Wood base for Gloser-Steers G5-77 in ebans with softin bross frim, or unfinished .......Net 9.60

## STEREO NOW! Super-Fidelity Easy Build Kits

### HI-FIKITS



DUAL PREAMP

wered preamp-control center offering complete ig and control facilities for any stereo program-topes, discs or broadcasts. Each channel provides: \$1 inputs — magnetic cartridge, tape head, mike; tel inputs—AM and FM tuners, FM multiples, auxiliate B; independent level control operating separately utch; 3-stage boss and treble tane controls with camplifier poir driving variable crossover, feedecontrol stage; Fletcher-Munson laudness compenith disobling switch; function-selector switch; low-ce autput for tape recorder; hum bolance control; ncc autput for tape recorder; hum bolance control; y response 5-200,000 cps ±0.3 db; IM distortion 00 cps) .03% @ 1 v. RMS autput; Harmonic dis-10-20,000 cps) .1% @ 3 v. RMS autput; Tameninge ± 15 db @ 50 and 10,000 cps; RIAA phona B tape head (15, 7.5, and 3.75 ips) equalization; main amplifier impedance, 8000 ahms. Tubes: ECC83's, 1-6X4. Size: 3½" high, 12" wide, 1. Shps. wt., 10 lbs. Cover supplied.

tereo Duoi Preomp Kit Nat 39.95 Net 64.95 me, factory wired & tested

, Model HF-81K STEREOPHONIC NEW! DUAL AMPLIFIER-PREAMP Only 69.95

complete hi-fi stereophonic control center with Williamson type push-pull EL84 power amptina one chassis. Eoch channel hos 8 inputs: low shone, tape head, and microphone. Front ponel choice of proper NARTB tope equalization for 15 or 3% jps; high level — 2 auxiliaries, AM, multiplex, Front ponel control to obtain stereoff and AM or FM and FM Multiplex; Ganged is and a separate focus (bolonce) controls; inlow distortion variable cross-over feedback type treble controls for each channel. Adaptable to hickness for console installation. Output Power watts (continuous) for manaural, 14 wots for Response — ± 5 db, 10 to 100 kc at 2 w tortion (60 and 6000 cps at 4:1) — 0.5% at it. Hormonic Distortion — less than 1% from 20 w output. Sensitivity for rated output — 4 my; tape head: 2 my; mic. 6 my; tother and 0.5 v. Hum and Noise Level (below 14W); — w level input, — 75 db on high level inputs. 5 db at 50 cps. Treble — ± 15 db of 10 kc. snections — 4, 8, 8 16 ahms. Tubes — 4, 7, 2 ECC82/12AUT, 4 EL84, 2 E281. Size 4%". Shpg. wt., 24 lbs.

IK. Kit complete with cover ......Net 69.95 As above but wired



NEW! -EICOL FM

TUNER **HFT-90** 

Cover \$3.95 Wired \$65.95

wired \$65.95 Cover \$3.95
extremely sensitive, low-noise "front n a cast housing completely pre-wired, y to use. This new front end, for the first ampletely practical even for a novice to ner equal to really good professional its. Employs the broad-band detector \$169 FM tuners now on the market. ensated components and advanced cireliminate need for AFC. Orift is less 0,000 from cold start. Sensitivity is 6 n other kit tuners and equals that of e wired tuners; it is 1.5 uv for 20 db on suppressed far below FCC standards. DM-70 traveling tuning eye. Input 300 h 260 kc, detector separation of 600 10,000 cps± 1 db. Audio output 1 V for 5 kc deviation. Hum 60 db below 1 V. Ind multiplex outputs. Flywheel slide-stabilized low limiting threshold for 10ce from weaker signals, broad-band iproved capture ratio and easier tuning, and heavy filtering, very low distor-6AQB, 3-6AU6, 1-6AL5, 1-6C4, 1-DM70, r silhouette" design adaptable to any console installation; optional cabinet. t 81/4". Operates from 110-125 VAC.

KIT (less cover) RED AND TESTED TUNER Net 65.95

2-WATT WILLIAMSON-YPE HI-FI AMPLIFIER . . ... CONTROL SECTION



COMPLETE KIT..... WIRED.....

34.95 57.95

Net 39.95

Net 3.95

Compact, attractively styled amplifier with camplete frant end facilities and true high fidelity performance. Direct tope head and magnetic phana inputs with NARIB (tope) and RIAA (phana) feedback equalizations. Dual triede circuit far yarioble turnover bass and treble feedback-type cantrols. Power autput: 12 watts continuous, 25 watts peak. Intermedulation distortion 1.5% at 12 tts, 0.55% at 6 watts, 60 to 6000 cps. Frequency vase: 12-50,000 cps ± 0.5 db at 1 watt; 25-20,000 cps. 5 db at 1 valt; 25-20,000 cps. 5 db at 1 watt; 25-20,000 cps. 5 db at 1

.....Net 34.95 F12 -As above, factory wired...





ONLY \$7.45

DOWN \$8.00 MONTHLY

KT-500 LT-50 124.50 COMPLETELY WIRED

### THE LAFAYETTE STEREO-TUNER IS UNIQUE AND INCOMPARABLE

Wore than a year of research, planning and engineering went into the making of the Lafoyette Stereophonic Tuner. Designed against obsolescence, it incorporates every practical and worthwhile feature that is considered necessary for your complete satisfaction of all present and future types of broadcasting. Already, breathtaking stereophonic programs are being transmitted vio FM and AM. It will certainly become more and more the popular method of high fidelity broadcasting. The funer also provides an autiput for multiplex FM stereophonic reception, enobling you to enjoy the ultimate in high-fidelity sound reproduction. Since the FM and AM sections are completely independent of each other, this tuner can be used furthermore as a dual-monard tuner. In this way, the music lovers are able to listen to concert programs on the FM channel in one room, while the younger-set can listen to a different program on AM in another room. In addition, an a monavral program which is broadcasted simultaneously via FM and AM, this tuner will enable you to tune in both channels and reproduce them through individual amplifier-speaker systems. The improvement of quality will be immediately noticeable because the sound source is now distributed and at the same time, the hale-in-the-wall point source effect is completely eliminated. Of cause, the unit can also be used as an ordinary type of FM-AM tuner; providing you with unsurposed quality of reception.


Apart from its unique flexibility, this is, before all else, a superior high-fidelity tuner, employing many feotures found only in the highest priced units. An inspection of the tubes and parts used will reveal that this tuner is engineered without compromise of any kind. With the Lefoyette Stereo-Tuner you are assured of noise-free, diff-free, distartion-free performance. You will not only hear this, quality, but also sense it even in the mechanical details; in the "feel" on the velvet-smooth easy flywheel tuning, in the professional appearance of the tastefully selected colors that w

Use it as a Stereophonic FM-AM Tuner Use it as separate Monaural FM & AM Tuners Use it as straight Monaural FM or AM Tuner MULTIPLEX OUTPUT FOR NEW STEREO FM . TWO PRINTED CIRCUIT

THE MOST FLEXIBLE TUNER EVER DESIGNED!

● MULTIPLEX OUTPUT FOR NEW STEREO FM ● TWO PRINTED CIRCUIT BOARDS AND IF'S PREALIGNED. ● FM AFC AND AFC DEFEAT ● TUNED CASCODE FM FRONT END ● 17 TURE PERFORMANCE — 11 Tubes (4 dual-purpose) + Tuning Eye & Selenium Recifier ● ARMSTRONG CIRCUIT WITH DUAL LIMITERS AND FOSTER-SEELEY DISCRIMINATOR ● 12 TUNED CIRCUITS AND DUAL CATHODE FOLLOWER OUTPUTS ● EXTREME SENSITIVITY AND WIDE FREQUENCY RESPONSE

• THE MOST FLEXIBLE TUNER EVER DESIGNED!



Use it as Use it as separate

LAFAYETTE OFFERS THE FAMOUS KT-300 PREAMP KIT AT A SPECIAL SUMMER PRICE - OFFER EXPIRES SEPT. 15, 1959



7.00 MONTHLY

LAFAYETTE MASTER AUDIO CONTROL CENTER with BINAURAL CHANNEL AND DUAL VOLUME CONTROL

Self-Powered

DC On All Filaments

24 Positions of Equalization

Tope Head Input, High Impedance

Dual Cathode Follower Output Stages

LT-50WX Same as above, campletely factory wired and tested .....

This is not only the finest hi-fi preomp characterized by unmatched features, but it has been functionally designed to keep pace with the conversion of your present hi-fi system to binaural (Stereophonic) sound. Incorporates an extra channel and dual valume control far binaural (Stereophonic) sound. Incorporates an extra channel and dual valume control far binaural reproduction. Features include DC on all tube filaments, negative feedback in every stage, dual cathode follower autput stages and latest plinted circuit construction. Less than 0.09% IM distartion and less than 0.07 harmonic distartion at 1V. Hum and noise level better than 80 db below 3V. Uniformly flat frequency response aver entire audible spectrum. 7 inputs for every type of phano, tuner or taue. Tasteful styling, brilliantly executed. Size 123/4 x 91/6 x 33/4". Shpg. wt., 101/2 lbs.

KT-300—Lafayette Moster Audia Cantrol Kit Camplete with cage and detailed assembly instructions.

LT-30—Same as above campletely wired and tested with cage and instruction manual Net 49.50

DELUXE 70 WATT BASIC AMPLIFIER

• Conservatively Rated At 70 Watts • Inverse Feedback • Variable Demping

• Metered Balance And Bias Adjust Controls • Available in Kit and Wired Ferm

Here's ultra-stability in a 70 watt basic power amplifier employing highest quality components

conservatively rated to insure performance and long life. Features motched pair KT 88's and

wire range linear Chicogo eutput transformer, variable damping cantrol, meter for bias and

balance and gold finish chassis. Frequency response 10-100,000 cps ± 1db. Hum and noise

90 db below full output. IM distortion less than 1½'', at 70 watts, less than 0.3% below 30

watts. Harmanic distortion less than 25', at 70 watts from 20 to 20,000 cps ± 1 db. Output

Impedance 4, 8 and 16 ohms. Handsame decorative cage perforated for proper ventilation.

Size 14½ x 10 x 7½" including cage and knabs. Shaps. wt., 40 lbs.

KT-400-Lafayette 70 watt Deluxe Basic Amalifier Kit complete with cage and detailed

KT-400-Lafayette 70 watt Deluxe Basic Amplifier Kit camplete with cage and detailed

LA-70—Same as above completely wired and tested with coge and instruction manual.

LAFAYETTE IS HEADQUARTERS FOR STEREO EQUIPMENT

## SAVE SWITH Lafayette & THEIL

### ayette PROFESSIONAL STEREO MASTER AUDIO **Broadcast Studio Control**



A GIANT FORWARD STEP IN PREAMPLIFIER DESIGN! O UNIQUE STEREO & MONAURAL CONTROL CENTER FACILITIES & OUTSTANDING PERFORMANCE SU-PERIORITY! • WITH AMAZING NEW BRIDGE CIRCUITRY & CONTROL FOR VARI-ABLE 3d-CHANNEL OUTPUT FOR 3-SPEAKER STEREO SYSTEMS! • VARIABLE CROSS-CHANNEL SIGNAL FEED FOR ELIMINATION OF "HOLE-IN-THE-MIDDLE" EFFECTS WITH STANDARD 2-SPEAKER STEREO! • HIGHLY PRECISE "NULL"
BALANCING & CALIBRATING SYSTEM PROVIDES MORE ACCURATE STEREO BALANCE THAN METERS!

> THE LAFAYETTE KT-600 SOLVES EVERY STEREO/MONAURAL CONTROL PROBLEM

Console

In Lofayette's constant effort to bring you the very letest and mest advanced developments in electronics—and porticularly in high fidelity—ot prices everyone can afford, Lefayette went to the most farward-looking experienced brains in the electronics/high fidelity industry and hos now DARED to produce what we think is the MOST REVOLUTIONARY DEVELOPMENT IN STEREO HIGH FIDELITY—A BRILLIANT NEW ACHIEVEMENT—THE LAFAYETTE KT-000 STEREO MASTER AUDIO CONTROL CENTER!


The KT-600 provides 4 dual concentric input level controls for bolanced use of different types of program sources — such as AM and FM tuners, tope recorder with microphone, phonogroph plus microphone, etc., and without overloading input; 3 controls are for high level input, and a separate level control is provided for the europut of the preempilitier stage. The KT-600 provides separate turnever and reliable dual concentric switches for 24 possible positions of occidental switches for 24 possible positions on each channel; equalization on each channel may be set independently of the other, furthermore, all liaputs can be werlably mixed, manewelly, at will (mike with phono, tape recorder with phono, etc.). The Bridge Control permits cress-channel feed or optionelly acts as a valume central for the 3d channel (Bridge) output to eliminate "pino-pony" or "hale-in-the middle" effects. An audible, sheep, accurate "nuil" (dip in sound output) is previded by a "Calibrate" position of the Steree Function Switch working in conjunction with the clutch-type Balance Controls for precise serea balance — highly impactant for good stereo performance. The 3d channel output can also serve for mixing any sterea program (steree record, tape, AM/FM steree) to play a steree program monourally through a separate amplifier and speaker system in another room. The KT-600 has Electronic Phase Reversal to make up for reversed-phase recordings sometimes found commercially, in which there is a loss of some portions of the frequency spectrum, and to correct speakers connected out of phase. Channel recordings to persons for correct positioning of steree music to the right or to the left — and this may optionally be accompanied by phase reversal for best averall is steree sound. The KT-600 has a Presence Rise Switch which pulls a sole instrument out of the general musical background with minimum disturbance of orchestral balance.

AND STILL OTHER PROFESSIONAL PEATURES OF LAFAYETE'S KT-600 ARE: Tope head equelization for the new 4-track steres tages; Master Gain Central for individual or simultaneous adjustment of channel levels, inquist for constant velocity (magnetic) and constant amplitude (coremic, crystal or capacitive) phone cartridges, oil equalized by the Rolloff and Turneur selector switches; individual channel concentric beas controls and concentric trable controls which permit pre-tetiling for good stereo tonol bolance and maintaining that balance at other tane cantral settings; one control circuit use 5%-tolerance components and 2½%-tolerance precision potenticanters for accurate centering of their 'flat' positions; switched rumble and scratch filters; switched Tietcher-Munson laudeness confour compensation; tage moniter output jacks and tope Memitor-Pley switch permit monitoring with recorders baving special monitor heads and promptifiers and also permit a stereo/monaural tope dack with 1 or 2 record/playback preamplifiers to be permanently connected to the KT-600 for recording and playback, "alote fallower" output stages for low impedence (1500 olsm) outputs with extremely law distortion; special low-flux power transformer and DC operation of all filements for exceptionally low hum and coal apperation low-noise deposited metal-film resistars and 7 of the new premium law-noise type 7025 tubes are used for extrao-good signal-to-noise rotio. The KT-600 has printed circuit bowerd censtruction for ease of wiring and maximum performance stability.

■ PRECISION "NULL" STEREO CALIBRATION & BALANCING ■ CONTROLLED CROSS-CHANNEL SIGNAL MIXING

● THIRD CHANNEL CONTROLLED OUTPUT ● CONTROLLED MONAURAL MIXING OF ALL INPUTS ● 24 SEPARATE EQUALIZATIONS ON EACH CHANNEL . MONAURAL RECORDING OR PLAY WITH STEREO SOURCES

● 6 CONCENTRIC FRONT-PANEL CONTROLS ● 4 CONCENTRIC REAR-PANEL INPUT LEVEL CONTROLS ● SWITCHED FLETCHER-MUNSON LOUDNESS CONTOUR COMPENSATION PARALLELED OR SINGLE CHANNEL AMPLIFIER DRIVE WITH MONAURAL SOURCES • 180° PHASE REVERSAL • CHANNEL REVERSAL WITH OR WITHOUT PHASE REVERSAL



#### PERFORMANCE SPECIFICATIONS FOR SUPER-STEREO

RESPONSE 10-25,000 CPS - 0.5 DB TAPE HEAD PLAYBACK EQUALIZATION FOR NEW 4-TRACK STEREO D LOW LEVEL SENSITIVITY 1.78 MILLIVOLTS STERIO DE LOW LEVEL SENSITIVITY 1.78 MILLIVOLTS
FOR 1 VOLT DUT DE HIGH LEVEL SENSITIVITY 87
MILLIVOLTS FOR 1 VOLT D SWITCHED 12 DB/OCTAVE
RUMBLE & SCRATCH FILTERS DESS THAN 03%
IND DISTORTION DUBLE TAPE MONITOR JACKS &
SWITCH FOR RECORD & PLAYBACK DUBL INPUTS FOR STEREO / MONAURAL CERAMIC, CRYSTAL OR CAPACITIVE PICKUPS WITH FULL USE OF EQUALIZA-TION SELECTORS SIGNAL-TO-NOISE BETTER THAN

- 80 DB AT HIGH LEVEL & - 67 DB AT LOW LEVEL
INPUTS FOR 1 VOLT OUT THE SENCE" SWITCH FOR
SOLO PROJECTION BASIC CONTROLS ALL CONCEN-TRIC . "PLATE FOLLOWER" OUTPUTS FOR LOW IM-PEDANCE WITH LOWEST DISTORTION # 7-TYPE 7025
LOW-NOISE DUAL TRIODES # 4-AUXILIARY AC

### **SPECIFICATIONS**

SPECIFICATIONS

CONTROLS: 12 (6 dual concentric, 6 single) on front panel, 4 on rear (dual concentric). INPUT AND TURNOVER SELECTOR: 7-position, dual concentric, independently set for each channel. Positions: Aux, Tape Amp. Tuner, AES, RIAA, Tape Head: 800, LP. ROLL-OFF SELECTOR: 7-position, dual concentric, independently set for each channel. Positions: LP. RIAA, AES, 10.5, 5, flot, Tape Head. BASS CONTROL: Dual concentric, 15 db boost or cut at 30 cps. TREBLE CONTROL: Dual concentric. 15 db boost or cut at 10,000 cps. RUMBLE FILTER: On-off switch, 12 db per octave slope, down 15 db at 30 cps. SCRATCM FILTER: On-off switch, 12 db per octave slope, down 15 db at 15,000 cps. STREDO FUNCTION SELECTOR: Dual concentric. Each concentric switch selects different functions for both channels. Positions: Monoural A, Monoural B, Stereo, A B, Calibrale: Calibrate, Reverse Phote, Normal, Reverse Channels, Reverse Channels + Reverse Phote, VOLUME-BALANCE CONTROL: Dual concentric. Clutch type: pulling out center knob locks controls apart for independent adjustment when performing the "null" stereo balance and colibrating operation; pressing knob back in permits simultaneous operation at Master Volume Control for both channels, with fletcher-Munson loudness contour compensation when Loudness switch is on. BRIDGE CONTROL: Continuously variable, with power on-off switch. Controls variable 3d-channel (Bridge) output and cross-channel signal feed. LOUDNESS SWIECH: On-off. Provides laudness contour compensation for Velume Control for both channels, and the provides solo projection by supplying abond rise over approximately her octaves, centered at 2,500 cp. TAPE MONITOR SWITCH: 199-Monitor positions. REAR PANEL CONTROLS; IN-PUP LEVEL SET CONTROLS: 3, dual concentric, 250K chans each, for the 3 figle level Inputs (tope Amp, Vuner, Aux). PHONO LEVEL SET CONTROLS: sits level at output of preemplifier stage for Tope Head, Mag. Phone and Ceromic-Crystal-Capocitive Phone inputs. NUM BALANCE ADJUSTMENT. DUAL INPUTS: 3. Tape (dual), Moin

LA-600 WX Same as above, completely factory wired and tested

### LAFAYETTE STEREO CENTRAL REMOTE CONTROL MODEL KT-315

self-powered electronic adapter offers exciting features unique

ELECTRONIC STEREO ADAPTER KIT

This self-powered electronic adapter offers exciting features unique even in the fast moving stereo field. Inclusion of low-impedance "plate follower" outputs permits remote operation 50 feet or more from the controlled amplifier. Unusual bridge circuit assures precise balancing of the stereo system by means of audible "null." Objectionable "hole in-the middle" effect can be eliminated by cross-feeding variable amounts of audio from each channel, includes controlled third-channel output for driving third amplifier and speaker, if desired, Individual or simultaneous control of each channel. Phase reversal with or without channel reversal. Selective monaural operation, Frequency response 10 to 25,000 cps. ... 0.5 db; gain 6 db; cross channel rejection better than 50 db.

. TWO LOW NOISE 7025 DUAL-TRIODES . POSITIVE CONTROL SO FEET OR BRIDGE BALANCING CIRCUIT . OUTPUT FOR "THIRD CHANNEL" . CLUTCH-TYPE VOLUME CONTROL ONLY 27.50



### NEW! LAFAYETTE STEREO/MONAURAL BASIC POWER AMPLIFIER KIT

\*\*ASTATESTE D. \*\*ASTATES AND SERVEY MAYAURAL DANIES TO OPTIONAL USE AS 36-WATT STEREO AMPLIFIER-18-WATTS EACH CHANNEL \*\*FOR OPTIONAL USE AS 36-WATT MONAURAL AMPLIFIER \*\*EMPLOYS A NEW PREMIUM-TYPE 7189 OUTPUT TUBES \*\*2 PRINTED CIRCUIT BOARDS FOR NEAT, SIMPLIFIED WIRING \*\*RESPONSE BETTER THAN 33-30,000 CPS \*\*\*/7 DB AT 18 WATTS \*\*EESS THAN 1.9, HARMONIC OR INTERMODULATION DISTORTION A superbly-performing bosic stereo amplifer, in easy-to-build kit form to sove you lots af maney and let you get into stereo amplifer, in easy-to-build kit form to sove you lots af maney and let you get into stereo and of minimum expensel Duol inputs are provided, each with individual volume control, and the unit may be used with a stereo preomptiner, for 2-18 watt stereo chonnels or, at the flick of a switch, as a fine 36-watt monaural amplifer — or, if desired, it may be used as 2 seporate manaural 18-watt amplifers CONTROLS include 2 input valume controls, channel Reverse switch (AB-BA), Monaural-Stereo switch. DUAL OUTPUT IMPEDANCES ore: 4, 8, 16 and 32 abms committing porallel (menaural) operation of 2 speaker systems of up to 16 abms. INPUT SEMSTIVITY is 0.45 volts per channel for full output. TUBES ore 2-6AN8, 4-7189; GZ-34 rectifier. SIZE 9-3/16"d [10.9/16" with controls) x 5½"h. x 13½"w. Supplied complete with perforoled metal cope, all necessary parts and detailed infrarctions. KT-310 Stereo Power Amplifier Kit (with cage)

LAFAYETTE HIFF KITS ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38

### 20 WATT HIGH FIDELITY AMPLIFIER KIT MODEL HF20K

- ±0.5 db 13 to 35,000 cps; ±1.5 db,
- 7 to 50,000 cps COMPARES WITH MOST EXPENSIVE
- AMPLIFIER MADEL BEST BUY IN SUPERLATIVE HIGH FIDELITY



COMPLETE 49.95

High quality equaliter and control section plus 20 wath Ultra-Linear Williamson-type power amplifier. Low distration feed-back equalization; 5 equalizations provided for tortion feed-back equalization; 5 equalizations provided for tortion feed-back tone controls. "Flat" positions at center feeting-themson compensation are no compensation when deflecther-Munson compensation when deflecther-Munson compensation when deflecther strength even without a flow size edited listening levels without for second tuner): 2 low Auxiliary (crystal/ceramic phone or second tuner): 2 low Auxiliary (crystal/ceramic phone or second tuner): 2 low Auxiliary (crystal cartridges without changing resistors. Hum quality crystal cartridges without changing resistors. Hum quality crystal cartridges without changing resistors. Hum quality crystal cartridges without changing resistors. Hum possible cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancing out of cycle residual hum. balance cantral for balancin

EICO MODEL HF20K — KIT, Complete MODEL HF20 — Factory Wired E-1 ENCLOSURE FOR HF20

### EICO 30-WATT HI-FI INTEGRATED AMPLIFIER KIT with PREAMPLIFIER EQUALIZER AND CONTROL SECTION



57.95 Complete Kit EXTREMELY

VERSATILE EQUALIZATION
AND CONTROL • NEWLY DESIGNED
"LOW-SILHOUETTE" CONSTRUCTION

Only \$5.80 Down - \$6.00 Monthly
Combines the high stability margin, wide frequency range, negligible distartion and exceptional power supply reliability of the power amplifier section with an extremely versority of the power amplifier section featuring tope head and sile preamplifier control section featuring tope head and sile preamplifier and including stratch and rumble filters microphone inputs and including stratch and rumble filters in addition to the usual facilities. Has 3 low level inputs in addition to the usual facilities. Has 3 low level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or ceramic cartridge or level inputs for TV or tuner, crystal or extremely law distortion ration with equalization circuit of extremely law distortion feedback type. Single switch selects any input and/or feedback type. Single switch selects any input and/or feedback type. Single switch selects only input and/or feedback type. Single switch selects only input and/or feedback type. Single switch selects only input stage with equalization of the selection of the feedback type. Single switch selects only input stage with equalization of the feedback type. Single switch minimum distortion.

Moistortion: 2% of 30 wasts, 0.5% of 10 wasts. Heriodoctions of the feedback type. Single selection of the feedback type. Single switch minimum distortion. Single select Constitution of the feedback type. Single selection of t Only \$5.80 Down - \$6.00 Monthly

40 walls 28 lbs. HF-32K Complete Kit
HF-32 Some as above Factory Wired ... EICO MF-30K 30-wet basic power amplifier kit, less cover. Shpg. wt., 17 lbs. Net 39.95

MF-30 Same, factory wired Net 62.95

E-4 Matching cover Net 3.95



### NEW! EICO BASIC AMPLIFIER KITS

1.35-watt "Ultra-Lineor" power amplifier (70 watts peak) featuring EL34 tapped-screen output stage, low-noise ER86 voltage amplifier, 65N7CT8, plus CZ34 rectifier, Frequency response 5-100,000 cps = 1.5 db @ 35 watts quency response 5-100,000 cps = 1.5 db @ 35 watts quency response 5-100,000 cps = 1 db both at 35 tartion below 1%. 20-20,000 cps

25 lbs.

HF35K 35-w. Power Amp. Kit

HF35 Some, factory wired & tested

E-2 Matching Enclosure

Net 47.95 Net 72.95 Net 4.50

Five-tube "Ultro-Lineor" hi-fi amplifier roted 22 watts continuous, 44 watts peak, Low-noise FF86 direct-coupled continuous, 44 watts peak, Low-noise FF86 direct-coupled to 65N7GT8 drives push-pull 616GB tapped-screen output 6170 tapped screen output 6170 tapped scr

Met 4.50

Williamson-type 14 watt (28 watts peak) power amplifier of low cost for both stereo and manaural installations. I low cost for both stereo and manaural installations. Trequency response 0.5 db, 10-100,000 cps and 1M Harmonic distortion less than 1% (50-10,000 cps) and 1M Harmonic distortion less than 1% (50-10,000 cps) and 1M Harmonic distortion less than 1% (50-10,000 cps) and 1M Harmonic distortion less than 1% (50-10,000 cps) and 1M Harmonic distortion less than 1% (50-10,000 cps) and 1M Harmonic state of the work o

Not 47 50

### LAFAYETTE SENSATIONAL VALUES in Stereo Turntables and Changers

### LAFAYETTE PROFESSIONAL TURNTABLE

### WITH AUTHENTIC HYSTERESIS SYNCHRONOUS MOTOR PERFECT FOR NEW STEREO & MONAURAL RECORDS

PROFESSIONAL 4-SPEED TURNTABLE WITH HYSTERESIS-SYNCHRONOUS MOTOR

THE LAFAYETTE TRUE MYSTERESIS-SYNCHRONOUS MOTOR. Since many so-called "hysteresis" mators have opposited and will continue to appear on the market, it is important that you know the difference between the real thing, as provided by Lafayette, and the imitators with partial hysteresis mators.

THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR IS PERFECT FOR THE NEW STEREO AND MONAURAL RECORDS. THE FACT THAT THE NEW STEREO RECORDS CONTAIN VERTICAL MODULATION IMPOSES STRINGENT REQUIREMENTS ON TURNITABLES. THEY HAVE TO BE FREE FROM RUMBLE, FLUTTER, WOW AND SPEED VARIATION. THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR MEETS ALL THESE REQUIREMENTS WITH EFFORTLESS EASE, RESULTING IN SUPERIOR REPRODUCTION OF STEREO DISCS, AS WELL AS TREMENDOUS REDUCTION IN RECORD WEAR.

REDUCTION IN RECORD WEAR.

ONLY LAFAYETTE'S HYSTERESIS-SYNCHRONOUS MOTOR, in its price class, is made to extremely fine toler ances (on the arder of .00001 inches)! Only Lafayette's mater has 16 cores, a high permeability rotor magnet, bal thrust bearings, allite sleeve bearings plus felt ail reservoir, cooling fins as an integral part of the rator and a hollow rotor core for maximum efficiency and minimum heat. Only Lafayette's motor con be alled from above without disassembly, through a unique ail feed system. Only Lafayette's mater has a self-aligning armature.

ONLY LAFAYETTE CAN GIVE YOU A REALLY PROFESSIONAL TURNTABLE WITH TRUE HYSTERESIS—
SYNCHRONOUS MOTOR AT SUCH AMAZINGLY LOW PRICES!

SYNCHRONOUS MOTOR AT SUCH AMAZINGLY LOW PRICES!

Here's THE turntable—the last ward in professional high-fidelity performance! A fine precision instrument in every sense. Just look at some of these OUTSTANDING FEATURES:—WOW AND FLUTTER: Less than 0.2% • TURNTABLE: Heavy, diecast aluminum. Lathe-turned for perfect bolance and concentricity, 12" diameter—weighs approx. 4 lbs. and provides amazingly constant speed; the extro-heavy rim acts just like a flywheel to prevent speed variations • TRUE HYSTERESIS-SYNCHRONOUS MOTOR: For smooth, low-noise, wow- and flutter-free operation • RUMBLE AND NOISE: 30 db below average recorded level • INTEGRATED SPEED CONTROL: For all 4 speeds—78, 45, 33½ and 16½ rpm • 2 OVERSIZE, HEAVY DUTY IDLERS: Precision-ground; provide positive constant-speed rim drive • SINGLE BALL TURUST BEARING: Turntable rides smoothly over ball bearing floating on thin film of oil • FREE-FLOATING, SHOCK-MOUNTED MOTOR • RUBBER CUSHION SHOCKMOUNTS • AUTOMATIC IDLER DISENGAGEMENT • RUBBER MAT • STAINLESS STEEL PRECISION SPINDLE • POWER REQUIREMENTS: For 105-130 volts, 60 cps AC; draws 16 V.A. • ACCESSORIES SUPPLIED: 45 RPM adapter, Strobe disc • SIZE: 2½6" above and 4" belaw motor board; 14¾" deep x 12½" wide • SMIPPING WEIGHT: 16 lbs.

LAFAYETTE MODEL PK-245

Net 64.50

above and 4" belaw motor be LAFAYETTE MODEL PK-245 ... ... Net 64.50 LAFAYETTE MONEY-SAVER COMBINATIONS SAVE UP TO 20%

Save an these cambinations of Lafayette turntables, arms and nationally famous campatible stered diamond cartridges

COMB.	TURNTABLE	TONE	CARTRIDGE	SPECIAL NET	COMB.	TURNTABLE	TONE	CARTRIDGE	SPECIAL NET
PK-301 PK-302 PK-303 PK-304	PK-245 PK-245 PK-245 PK-245	PK-270 PK-270 PK-270 PK-280	Picker, 371-D Shure M7D GE GC-5 Picker, 371D	92.50 92.50 92.50 94.50	PK-305 PK-306 PK-307 PK-308 PK-309	PK-245 PK-245 PK-245	PK-280 PK-280 PK-90S PK-90S PK-90S	Shure M7D GE GC-5 Pick. 371D Shure M7D GE GC 5	94.50 94.50 88.50 88.50 88.50

Net 104,50

VALUE 129.50 ONLY 64.50 SAVE OVER 50%



15.60

PK-245 Turntable with PK-270 professional 12" Stereo tone arm with Shure M3D compatible stereo cartridge with diamand stylus. PK-311 112.50





### LAFAYETTE 4-SPEED PROFESSIONAL TRANSCRIPTION PLAYER WITH 3 LB. 12" ALUMINUM TURNTABLE

- IDEALLY SUITED FOR STERED! BETTER THAN-SO DE RUMBLE & HOISE VIBRATIONLESS MOTOR SUSPENSION . BELOW 0.2% WOW & FLUTTER . MAGNETIC EDDY-CURRENT BRAKE
  - 3 LB. 12" BALANCED & MACHINED ALUMINUM TURNTABLE . SPEED CONTROL FOR ± 7% VARIA-


An amozing low price for the superior quality embodied in this fine instrument. Features include heavy, rim-weighted, 3 lb, machined-aluminum 12'' turntable, magnetic brake with speed control for  $\pm$  7% variation of each speed; the extremely low noise and rumble figure of -50 db below average recorded level; wow and flutter (speed variations) of less than 0.2%, new-type aversize precision-ground idler with special lubrication features; positive-locking detents an 4-speed single-knob speed selector; ("aff" positions between all speed positions; free-floating shack-maunted motor; automatic idler disengagement in "off" positions; precision spindle turns on single ball bearing; hoavy duty 4-pole induction motor. Heavy rubber turntable mat. For 105-120 valts, 60 spc AC; drows 0.13 amperes. Size of motor plate  $11'' \times 10''' \times 14V_2'''$ ; requires 4'below motor board, 11/2''' above. Complete with stroboscope disc, 45 rpm adapter, AC line cord. Shgs, wt., 14 lbs.

PK-240 12" TRANSCRIPTION TURNTABLE

COMB.	TURNTABLE	TONE	CARTRIDGE	NET	11	COMB.	TURNTABLE	TONE	CARTRIDGE	NET	
PK-312	PK-240	PK-90S	Pick. 371-D	65.50	1 [	PK-316	PK-240	PK-270	Shure M7D GE GC-5	68.50	
PK-313		PK-90S	Shure-M7D	65.50	П	PK-317	PK-240 PK-240	PK-270 PK-280	Pick. 371D	70.50	
PK-314	PK-240	PK-90S	GE GC-5	65.50		PK-319	PK-240	PK-280	Shure M7D	70.50	
DV-315	PY-240	DK 270	Pick 371D	48 50	1	PK-320	PK.240	PK-280	GE GC-5	70.50	

New Lafayette law-rumble Model PK-240 turntable with Pickering "Stanton" Model 196.7D stereo/monaural transcription arm with Stereo-Fluxvalve magnetic cartridge and 0.7 mil diamand stylus.

PK-321



### THE REVOLUTIONARY NEW LAFAYETTE VERTICAL-LATERAL KNIFE-EDGE 12" & 16" STEREO TONE ARMS! 4. HARDENED-STEEL KNIFE-EDGE PIVOTS & BEARINGS FOR COMPLETE, PRACTICALLY FRICTIONLESS,

LIGHTWEIGHT, DIE-CAST ALUMINUM TONE ARM

SELF-CONTAINED BUBBLE LEVEL FOR PERFECT, GUESS-FREE LEVELLING LIGHT, MOLDED PLASTIC PLUG-IN SHELLS FOR MOST POPULAR STEREO CARTRIDGES

PRECISELY-ADJUSTABLE COUNTERBALANCE WEIGHT

O NON-RESONANT WITHIN THE AUDIBLE FREQUENCY RANGE

PERFECT TI ACKING WITH THE LIGHTEST STYLUS FORCE

● PERFECT TI ACKING WITH THE LIGHTEST STYLUS FORCE

■ EXTREMELY EFFECTIVE FOR PERFECT REPRODUCTION WITH "45-45" STEREO DISCS

RUGGED CONSTRUCTION — FOOLPROOF — TROUBLE FREE

A remarkable advance in tone aim design is presented in these new Lafayette tene arms. An unusual new principle, utilizing 2 vertical and 2 lateral hardened-steel knife-edge pivats supported by hardened steel bearings, provides extremely low horizontal and vertical friction. This unusual type of bearing provides minimum waveform distartion and na undestrable mation or loate-jointed action as viewed fram the stylus end. Graave tracing is smooth, with excellent tracking even with very light pickup weight, due to the absence of frictional logses. Friction in horizonal and vertical directions is law, but mechanical impedance is high at 45°, providing maximum effectiveness with 45-45 sterea cartridges. The unique knife edge bearing construction makes it possible to draw out the 2 shielded leads from the center of the support column, eliminating "stiffness friction" due to the leads. A highly-precise bubble level is provided at the top of the support column; the bubble plus 3 adjustments on the bose make for perfect levelling. Neight of the orm is adjustable from 1½" to 2½" above matorboard. Overall length of PK-270 12" arm is 12¾"; linear distance from support column to stylus tip is 10°; the PK-280 16" arm. Shgp. wt., 1½ ibs.

Net 17.50 PK-270 Lafayette 12" Tone Arm. Shpg. wt., 1½ ibs.
PK-280 Lafayette 16" Tone Arm. Shpg. wt., 2 ibs.

LAFAYETTE COMPLETE STEREO TRANSCRIPTION PLAYER

● 5-CONTACT PLUG IN HEAD FOR ALL STEREO CARTRIDGES

● 4-SPEED, HEAVY DUTY 4-POLE TRANSCRIPTION TYPE INDUCTION MOTOR ● MAGNETIC BRAKE FOR

±7% SPEED ADJUSTMENT ● STYLUS WEIGHT ADJUSTMENT SCREW ON TONE ARM ● RUMBLE AND NOISE -40 DB . LESS THAN 0.3% WOW

NOISE -40 DB • LESS THAN 0.3% WOW

Here is a complete hi-fi, compatible sterea pickup system, designed against absalescence and yet priced modestly. This top quality manual player features a 5-contact plug in head to accommodate the latest stereo as well as manual cartridges.

Equally important in contributing to the excellent performance of this system is the new 4-speed turntable assembly. It is equipped with a quiet, heavy duty 4-pole mator, with an exclusive magnetic brake far instantaneous fine adjustment of each speed. Strobascope disc also included. Smooth operation is assured further by the 10" heavy turntable, fitted with rubber mat. Provision for easy adjustment of stylus pressure is available. Dimensions of mounting plate 12-15/16" left to right, and 10%" front to rear. Requires 2%" below and 3" above mator board. Far 105-120V, 60 cps. Accessories included are: 45 rpm adaptor, autput cable to amplifier and plug in heads. Shops.

PK-323 Same as above with SHURE M7D
PK-325 Same as above with GE GC-5

PK-162—Wood base for above, custam finished in either mahagany or blande (Please Specify). Shpg. wt., 5 lbs PK-163-Unfinished mounting board for above, Strong durable %" gumwood, (Shpa. wt., 7 lb.)



DELUXE WOODBASES AND MOUNTING BOARDS FOR TRANSCRIPTION TURNTABLES



14.95 FINEST SELECTED HARDWOOD VENEERS
CHOICE OF FIVE CABINETMAKER FINISHES
FREE-FLOATING-FOAM RUBBER MOUNTED
MOTOR BOARD
INDIVIDUAL ADJUSTABLE FEET FOR ACCURATE
LEVELING

These substantial weadbases are deluxe units made from the finest selected hordwood veneers by skilled craftsmen. All four sides are ½" thick and the top is ½". All have All four sides are ½" thick and the top is ½". All have firmly secured mitered corners. The four bumper feet are firmly secured mitered corners. The four bumper feet are floating mounting board is foam rubber mounted and the floating mounting board is foam rubber mounted and the top have a finish matching it was made at Available in five Jop has a finish matchinest managany, blande, ebony, attractive cobinetmaker finishes: mahagany, blande, ebony, attractive cobinetmaker finishes: mahagany blande, attractive cobinetmaker finishes. The four finishes attractive cobinetmaker finishes: mahagany blande, attractive cobinetmaker finishes attractive cobinetmaker finishes.

PK-266 Base and board cut for PK-240 Net 14.95

MOUNTING BOARDS FOR

LAFAYETTE TURNTABLES

Precut, unfinished, smoothly sonded mounting boards for Lafayette turntobles. Ready for easy finishing. Size 15%" × 2017" × ½", Shpa. wt., 3 lbs. Net 3.45 PK-268 Cut for PK-245 turntoble Net 3.45 PK-269 Cut for PK-240 turntoble Net 3.45

**NEW! Lafayette VISCOUS-DAMPED** STEREO TONE ARM — PROFESSIONAL 12" PK-90S



JEWEL BEARING SUPPORT
INSTANT PLUG-IN CARTRIDGE CHANGE
AUTOMATIC FLUID CONTROL
PERFECT RECORD TRACKING
ACCOMMODATES MOST STEREO & MONAURAL
HIGH FIDELITY CARTRIDGES

This Sterea/Monaural transcription arm assures dependable and stable aperation, utilizing the floating-action principle of viscous-domping. The arm is supported at a single ciple of viscous-domping. The arm is supported at a single received by a pivot and jewel bearing having nealigible friction. Domping is accomplished by a silicone fluid principle of the support of the supported of the support of the suppo materboard; round mounting base is 2% in distinct Shop, wt., 2% lbs.
Shop, wt., 2% lbs.
PK-90S-12" VISCOUS-DAMPED STEREO TONE ARM
Not 12.50

### NEW! JOBOPHONE 1301 MS SEMI-PROFESSIONAL TRANSCRIPTION TURNTABLE with Constant Speed Synchronous Motor

DESIGNED LOW VERTICAL FOR RUMBLE STEREO

IMPORTED FROM HOLLAND YOU MONEY!



SPECIALLY PRICED! 24.95 QUANTITY

· COMPLETE WITH RONETTE STEREO/MONAURAL TURNOVER CARTRIDGE

PATENTED "SONOMAT" HIGH TORQUE DRIVE ASSEMBLY FOOLPROOF COLOR-CODED
PUSHBUTTON SPEED SELECTION 1/2 OF 1% SPEED ACCURACY LESS THAN 0.29% WOW & FLUTTER

Accuracy • Less THAN 0.29% WOW & FLUTTER

A precision-engineered 4-speed turntable with many notoble features. Only maderately-priced turntable with
oble features. Only maderately-priced turntable with
ing with deep-well bross sleeve. Recard, turntable and
ing with deep-well bross sleeve. Recard, turntable and
spindle rotate as a single unit to prevent wear af recard
spindle rotate as a single unit to prevent wear af recard
spindle rotate and reduce the possibility of rumble, wow, and
center hole and reduce the possibility of rumble, wow, and
furter. EXCLUSIVE adjustable spring counterbolance an
flutter. EXCLUSIVE adjustable spring counterbolance an
flutter. EXCLUSIVE adjustable spring counterbolance an
flutter. Thick live-rubber
stylus into lead-in grace of recard. Thick live-rubber
stylus into lead-in grace of recard.

45-RPM spindle. Synchronous induction-type heavy
delighted, heavy turntable, 9½" down. Wow and flutter
weighted, heavy turntable, 9½" down. Wow and flutter
stylus live-rubber and noise better than 40 do
less than 0.29%: rymble and noise better than 40 do
less than 0.29%: rymble and noise better than 40 do
less than 0.29%: rymble and noise better than 40 do
less than 0.29%: rymble and noise better than 40 do
less than 0.29%: some and noise better than 40 do
less than 0.29%: some and noise better th

### afayette OFFERS OUTSTANDING VALUES FOR THE AUDIOPHILE

### **NEW! LAFAYETTE 12"** SINGLE SPEED 331/3 — RPM HYSTERESIS TURNTABLE



- IDEALLY SUITED FOR STEREO
- TRUE HYSTERESIS-SYNCHRONOUS MOTOR
- RUMBLE & FLUTTER LESS THAN 0.2%
- 41/2 LB. RIM WEIGHTED ALUMINUM TURNTABLE
- STURDY MOUNTING PLATE OFFERS MAXIMUM SHIELDING

Beautifully styled and modestly priced! This 331/3 rpm turntable offers superior performance for hi-fi and professional use. Accurate and close tolerance machining throughout in-sures trouble-free operation, with extremely low levels of wow, flutter and rumble. Employs superior craftsmanship throughout—all critical parts are ground to micro finish. True hysteresis synchronous motor provides absolutely constant speed regardless of line voltage variations. Motor is shock-mounted with rubber cushion. Has precision ground shaft which turns on heavy ball-thrust bearing, thereby eliminating any vertical movement— a prerequisite for stereo. The 4½ th, die-cast rim-weighted aluminum turntable is lab-tested for perfect dynamic balance. The oversize heavy duty roller wheel provides positive rim drive. The roller is disengaged in "Off" position to prevent flat spots. Sturdy mounting plate offers maximum shielding against hum pick-up. A rubber turntable mat is provided so that maximum tracking is assured. Less than 0.2% wow and flutter. Noise level is 45 db below average recording level. The turntable is attractively styled to blend with any home decor. Has "On-Off" switch and indicator light. Requires 26 watts on 105-120V., 60 cycles AC. Size: 13¾ x 14¼ x 6¼". Shpg. wt., 19 lbs. Net 47.50 PK-331

### LAFAYETTE PROFESSIONAL BULK TAPE ERASER AND DEMAGNETIZER

- COMPLETELY ERASES TAPE REDUCES NOISE LEVEL

- FOR 3", 5", 7", OR 101/2" REELS TWO ERASING COILS
- 61/2 AMPERES DRAIN

Regularly 49-95 Special 21.50

A carefully designed and precisely manufactured professional tape "degausser" for complete erasing of tapes. Just place the tape real on spindle of demagnetizer, slow-lay rotate 2 or 3 turns, take off, and that's all—a completely clean tape. The demagnetizer removes every signal on the entire tape—even extra strong sounds too loud too termoved by the recorder's own erase head. Completely clears tape of any prior recordings. In addition, by leaving tape campletely unmagnetized, it serves to reduce tape hiss to the level of new "virgin" tope. In foct, tape hiss is so low that subsequently possing it aver the erase head of a recorder actually INCREASES noise by 4-6 db.

To take advantage of this noise reduction, some users

### LAFAYETTE TAPE HEAD DEMAGNETIZER • REMOVABLE POLEPIECES

• EXTRA CONVENIENT



Unlike other demagnetizers, the Lafayette Tape Head Demagnetizer uses removable polepieces. Three camplete sets are furnished: straight, 45°, and 90° (right angle), permitting quick and easy use with any tape head. Tape heads need no langer be removed from the recorder so they can be reached by the clumsy polepieces of alder head demagnetizers; the Lafayette Demagnetizer's palepieces reach every head.

Far from being a luxury, a tape head demagnetizer is necessary for best tape recorder performance. Among all the passible sources of noise in tape recorders, there is anly one which is camman to all recarders and is a perfectly natural, camman accurrence—tape hiss due to magnetized hoads. Although unmagnetized when new, tape-heads gradually become magnetized by sharp switching putses accurring while switching the recarder fram play


to record or vice versa. Same audio saurces (especially the human voice) produce unbalanced signals cantaining mare power peaks in ane direction than in the other. This unevenness is also sufficient to cause magnetize for a tape head.

The solution is to use a demognetizer to remove this permanent magnetism from the head, thus reducing the noise level. Periodic head demagnetization is required far all tape recorders to insure aptimum signal-to-noise ratio, far this reason, same prafessianal tape-recorders are demagnetized as aften as several times weekly. Now, Lafayette enables anyane with even the mast modest budget to perform this necessary demagnetization, with a minimum of effort. For 110 volts 60 cycles. Shpg. wt., 1 lb.

PK-238—Tape Head Demagnetizer

### - LAFAYETTE -HIGH FIDELITY RECORDING TAPES





### You Be The Judge! = NEW! MYLAR BASE RECORDING TAPE

Lafayette's huge purchasing pawer makes it possible to provide you with first-quality tape at about holf the price you would pay far the same tape with the manufacturer's own labels. WE GUARANTEE ABSOLUTE SATISFACTION OR YOUR MONEY BACK. These splice-free mylar base recording tapes are quality manufactured to assure uniformity of frequency response and complete absence of frepowts. In addition, they are extremely durable and break-resistant and are capable of withstanding temperature and humidity changes. The wide frequency response choracteristics combined with low noise level and long playing time apens new horizons of recording passibilities for the high fidelity enthusiasts as well as prafessional sound engineers. Av. Shpg. wt., 12 oz.

RT-12 1800 ft. on 1 mil Mylar base. 7" reel diometer. Lots of 5. Ea. 2.75 Singly, Ea. 2.85 RT-13 2400 ft. on 1/2 mil Mylar bose, 7" reel diometer. Lots of 5, Eo. 3,49 Singly, Eo. 3.69

### ACETATE BASE RECORDING TAPE

These popular high quality tapes are coated uniformly with red oxide on plastic bose with high output and uniform frequency response covering the entire audio spectrum, 40-15,000 cps, completely splice-free. Another Lafoyette austranding value far all hi-fi recordists, backed up by our Money Back Guorantee. Using 7½ cps dual trock, 1200 ft. reel provides 1 hr. of recording time white 1800 ft. reel provides 1½ hr. of recording time.

RT-10 1200 ft. on 1½ mil acetate base, 7" reel.
Lots of 5, Eq. 1.49 Singly, Eq. 1.59

2400 FT.—7" REEL—MYLAR BASE

RT-11 1800 ft. on 1 mil acetate base, 7" reel.
Lots of 5, Eq. 1.88 Singly, Eq. 1.98



**NEW! LAFAYETTE PK-244** 

NEEDLE BALANCING GAGE

At last a precision needle balancing gage that tales its accuracy. The simplicity of its design of springs, interacting levers and bors that frequent adjustment. By placing the counterweight in the panding index holes it is passible to carrectly the tracking weight of your tane arm.

PK-244 NEEDLE BALANCING GAGE



Holds tape recarder reel in place by locking spindle to reel. Especially useful if recorder is in vertical position. Will not interfere with normal operation of reels. Easily removable. removable. MS-564 Set of two ....



Here's a terrific valuel The famous RCA Autosplicer cuts a diagonal flap joint in the tape and trims the splicing tope and tape edges with an indented trim cut. The slight "waists" formed prevent adhesive fram cantacting recorder mechanism and prevent layer-to-layer adhesion. No mare "waw", "flutter", or erratic perfarmance due to adhesive deposited on tape guides, etc. Cansists of a tape alignment guide with self-adhesive back far fastening to any surface, cutting unit with diagonal cutter an one side and woist-type cutters on other, and pratective caver for blades. Shop. wt., 6 oz.

### TELEPHONE PICKUP FOR RECORDING TELEPHONE CONVERSATIONS

Induction telephone pickup. Telephone conversations can now be picked up with no tapping of wires or special telephone circuits. Simply place the phone base, either cradle ar upright type, on the pickup platfarm and connect the leads to the high impedance input of any medium gain audio amplifier, or directly to any tape, disc or wire researcher. Shoa. wt. 8 azs. Net 1.95





METAL STORAGE CANS NEW LOW PRICE

.39 ea in lots of 6

Can holds 7" reel. Best protection for valuable recordings. Handsome finish of hammertone enamel. Cans ribbed for stacking. Precisian fit makes opening and closing easy.

Lots of 6, ea. .39 - Singly, ea. .41





### (A) METAL TAPE STORAGE CHEST

Net 2.99

(B) 7 INCH EMPTY PLASTIC REELS ally baxed fine plostic reals for recording tape.

In lots of 6, ea. .38, Singly, ea. .45

### LAFAYETTE RECORD CHANGER SALE!

MONARCH 4-SPEED STEREO RECORD CHANGER

FULL INTERMIX IN ANY ORDER PLAYS BOTH STEREO & MONAURAL RECORDS

SPECIAL SALE!

22.95 Complets with Steree

18.95 Complete with Monaural Crystal Turnsver Cartridge

PK-285 Manarch Stereo Changer, Net 22.95
crystol turnover cartridge Net 1.88
MONARCH 45 RPM Spindle
WOOD MOUNTING BASE cut to fit above. Blands ar Mahagany—
Net 3.95
specify finish
PK-144 Manarch changer with manaural cartridge Net 18.95




### NATIONALLY ADVERTISED CHANGER

**Tremendous Buy for Stereo!** 

STEREO AND MONAURAL CARTRIDGES

38.50 Regular Special 23.50 Only \$5.00 Down



A superb value for the "sterophile" — Top name brand, 4-speed stereo changer with tone-arm which will accept all standard stereo cartridges. Automatic intermix handling of recards, mutting switch for soundies change cycle, automatic shut-off after last record. Rim-weighted turn-table, heavy-duty 4-pole shaded-pole motor for top quality reproduction. If you don't agree that this changer is a top buy — your maney will be refunded. Changer measures 12½" x 13½" with 5" clearance above and 2 11/16" belaw matarboard. Shps. wt., 21 lbs.

PK-275

Record Changer (less base and cartridge)

PK-275

Record Changer complete with Ronette's famous compatible stereo turnover cartridge with twa sapphire styll (.75 & 2.5 mlls)

PK-277

Record Changer complete with E-V's top-quality magnetic turnover stereo cartridge (26MDST) with diamond (.7 mil) and sapphire (3 mil) styli

Record Changer with E-V's well-known compatible crystal turnover stereo cartridge (26 DS). Diamond stylus (.7 mil) for stereo discs and LP's; Sapphire tip (3 mil) for 78's

Net 34.50

PK-111

Wood base for above, specify mahogany or blande. Shpg. wt., 5 lbs.

Net 3.95



### NEW DYNAKIT MARK III 60 WATT POWER AMPLIFIER KIT . PRE-WIRED PRINTED CIRCUIT ASSEMBLY

. MATCHED PAIR PREMIUM TUBES

. CHOKE FILTERING TO MINIMIZE NOISE

Compact 60 watt basic amplifier designed for finest listening quality in modern hi-fi installations. Pre-wired printed circuit assembly with parts mounted assures correct trouble-free construction in as little as three hours. Accurate and simple bias setting independent of meter accuracy. Balancing ar critical adjustments are not required to meet performance specifications. Frequency response better than ±.5 db from below 6 cps to above 60 kc. Response at any level up to 60 worths is ±.1 db over a range in excess of 20 cps to 20 kc. IM distortion less than 1% at 60 watth, .5% below 50 watts and .04% at average listening levels. Less than 1% harmonic distortion within 1 db of 60 watts from 20 cps to 20 kc. Excellight transient response on pulses, square woves, etc., and naise 90 db below maximum. 4, 8, and 16 ahm outputs. Utilizes 1 6ANB, 2 KT88 (or 6550), 1 G734 and selenium rectifier. Washable, chip-proof vinyl coated finish on cover. All parts, tubes and protective cover included in kit. Shpg. wt., 28 lbs.

MARK III-70 KIT WITH 70.7 VOLT OUTPUT FOR P.A. USE ..



#### NEW! DYNAKIT HI-FI PREAMPLIFIER KIT

PRINTED-CIRCUIT MODULE
5 INPUTS — 2 OUTPUTS
4 A.C. CONVENIENCE OUTLETS
INTEGRAL D.C. HEATER SUPPLY

quality preamp-control unit incorporating factory-wired printed-circuit module far easy and accurate tembly. Current and voltage feedback loops include four stages of gain. Inputs: Low-level magnetic ridige, high-level magnetic, radia, TV, tape, plus "special" low level (aptian of extra RIAA phana but, tape head, or mike). Outputs: Tape and audia autput. Centrols: Select-requalization, bass, bie, valume, tape manitor, laudness, hum-bolance. Tone-Control Range: ±14 db @ 20,000 cps, 20 db @ 20 cps. Pheno Equalization: RIAA, 78 rpm, original LP (accuracy ensured by use of 1% mponents). IM Distertion: Less than .05%, unchanged at any setting of valume control. Response: 0.5 db 6-60,000 cps. Gain: 54 db @ 1000 cps (RIAA input), 20 db @ 20-20,000 cp. (High-level put). Impedances: 1000 ohmi (autput), 500,000 ohms or higher (ferminating). Tubes: 2-ECC/12AX7 us selenium stack. Power Requirements: 200-400 volts d.c. @ 3-4 ma.; 6 volts a.c. @ .75 amps. ter: 2%" high x 12" wide x 6" deep. Shpg. wt., 7 lbs. Chaice of bane white or charcool brown by finish.

Pynakit Preamplifier Kit

Accessory Kit for Panel-Mounting

Dynakit Dual Preamp Power Supply, PS-1



Lafayette's new Super-Sensitive 4 Transistor Telephone Pick-up Amplifier with class "8" push-pull output for efficient speaker eperation. Permits the whole family to enjoy phone conversations. Invaluable on the property of the property of

Net 1.30 Net 1.95 Net 1.30 MS-16 Telephone Pickup Coil ... BATTERY 9V. BURGESS #2N6.

Nationally Advertised

4-SPEED CHANGER COMPLETE WITH THE BRAND NEW VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE

Reg. 65.20



ANOTHER FABULOUS BUY at Lafayettel This is a brand new current changer made by a famous manufacturer plus the new General Electric VR-22 sterea cartridge, affering the finest reproduction from both sterea and manuscul records. This cartridge features 20-17,000 cgs, response, and a .7 mil. diamand needle. Up to 30 db separation between channels, tracks of 5 to 7 grams. This combination is priced so law that we DARE NOT mention the changer manufacturer's name. This deluxe changer features automatic intermix of different rim-weighted turntable, the heavy duty 4-pole shaded pole mater and rugged drive system, all combine to produce even, smooth tarque with no speed variations; there is practically no wow, no flutter, no rumble. And dan't forget Lafayette's MONEY 8ACK GUARANTEE if you don't agree that you have received an exceptional value. Size 12½" x 13½", requiring 3" clearance above and 2-1/16" below the law mater board. Shpg. wt., 21 lbs.

PK-330 RECORD CHANGER (less wood base) with New GE VR-22 (-7 mil) Diamand Stereo Cartridge. Net 23.9.95

PK-252 RECORD CHANGER with Pickering Sterea 371.7D diamond cartridge ....

WITH "STEREOTWIN" STEREO CARTRIDGE



COLLARO TSC-740

ELAC "STEREOTWIN" MAGNETIC STEREO
CARTRIDGE WITH 0.7 MIL DIAMOND STYLUS

Reg. Cat. Price 86.15

HERE 15 A MOST UNUSUAL BUY! You get the latest model 4-speed Collara deluxe recard changer, Model 15C-740, with autstanding styling, dynamically-balanced and damped 2-piece tone arm, automatic intermixing of 7", 10" and 12" records stacked in order of decreasing size, automatic shut-off after last record, automatic or manual operation and jam-proof quality mechanism. With the changer you also get the famous ELAC VARI-ABLE RELUCTANCE "STEREOTWIN" CARTRIDGE, with ABLE RELUCTANCE "STEREOTWIN" CARTRIDGE, with superior low-hum performance, response of 30-18,500 cps ± 2 db, high output of 25 millivoits for excellent signal-ta-noise ratio, high campliance of 4x10-° cm/dyne, and 0.7 mil diamond stylus. THIS 15 A QUALITY COM-BINATION—AT A PRICE THAT CAN'T BE BEAT! Shpg. wi., 20 lbs.

20 lbs.
PK-279—Callora TSC-740 with Elac Magnetic Sterea
Cartridge SALE! Net \$3.95

### "MAGIC BRAIN" TV REMOTE CONTROL




### NEW PURCHASE!

For all KC590, KC597, and KC566 thru KC592
Series Chassis — Over 200 Different RCA Models!
Control your RCA TV set from any remore spot in the room (up to 30 ft.) without getting up or touching the receiver! Also perfect for bed ridden or physically handicapped around easily.

physically handicapped persons around easily.

Here is what the remate control can do: (1) TURN SET ON; (2) SELECT DESIRED CHANNEL; (3) ADJUST THE VOL-ME; (4) ADJUST PICTURE; (5) ADJUST FINE TUNING; (6) TURN SET OFF. A single compact unit that fift the palm of your hand, gives you all this cantrol from your casy chair. The flat interconnecting cable is easily concealed under the carpet or along the floor baseboard. Installation of all other camponents is made at the receiver. Camponents include Relay Chossis, Mater Bracket Assembly, Remate Control Head and Cable, Switches, Mounting Straps, Terminal Board, Resistors, Capacitors and Nean Lamp. Detailed installation instructions included. Shpg. wt., 10 lbs.

### 10 WATT PUSH PULL HI-FI AMPLIFIER KIT



SELECTOR SWITCHES PERMIT CHOICE OF THREE INPUTS SEPARATE BASS AND TREBLE CONTROLS

4, 8 AND 16 OHM OUTPUTS

This new, economy hi-fi emplifier has many deluxe features for exceptional performance. The three inputs are radio/crystal phono pickup, magnetic phono pickup and microphone. A selector switches the input from radie/crystal to microphone or magnetic pickup, depending upon the position of a rear agron slide switch.

OUTPUT Reted 10 waths, peek 18. PREQUENCY RESPONSE — ±1 db 30-15,000 cps. DISTORTION — 1.5% harmonic, 4% intermedulation at 8 waths.

4 CONTROLS — Input Selector: Valume; Trable; Power-On-Off-Boss. TREBLE CONTROL — Flat response up to 15 db boost. BASS CONTROL — flat response up to 18 db botten.

TROL — Flat response up to 15 db boost. BASS CONTROL — flat response up to 18 db ottenuation. OUTPUT IMPEDANCES — 4, 8 and 16 ahms. TUBES — 45C7, 65L7G7, 2 — 6V6GT and SY3GT rectifier. AUXILIARY AC OUTLET — Distinctive Hammertone finish, SIZE — 10½" x 6½" x 5½". WEIGHT — 8½ ibs. For 110-120 Volte.

POWER/ISOLATION TRANSFORMER



IDEAL FOR AMPLIFIERS, INTERCOMS AND RECEIVERS
12 PAGE BOOKLET DESCRIBING USES
AC LINE CORD AND PLUG IN

TR-91-TRANSFORMER ...

### NEW! 6 TRANSISTOR SUPERHET RECEIVER with LATEST NPN-PNP TRANSISTORS

GE 2NIBBA AUDIO OUTPUT TRANSISTORS - 100% SUBMINIATURE PARTS - NO COMPROMISES!
 CLASS B PUSH-PULL AMPLIFICATION-PLENTY OF POWER. - FOR GROUP AND PRIVATE LISTENING
 LABORATORY DESIGNED --- SENSITIVE, SELECTIVE, STABLE!

Superb Performance! Incomparable Value!

Transistor-wise Lafoyette proudly presents its newly revised 6 Transistor Superhel Receiver Kit KT-119A.

Transistor-wise Lafoyette proudly presents its newly revised 6 Transistor Superhel Receiver Kit KT-119A.

This improved model uses the latest GE NPN-PNP Transistors in an ingeniously engineered, laboratory tested circuit providing superb performance and on amozing superior commercial quality. The circuit features a specially matched set of 3 if transformers, Oscillator Cail, High-Q Loop, Class & Push-Pull Audia Amplification and optimum Transformer Caupling in audia and autous stages. Has efficient 2½° speaker for exemplary reproduction and earphone jack for private listening, Complete with all parts, transistors, pre-punched chassis, but less battery and leather case. New 28 page easy-to-fallow step-by-step instruction book. Size 6 x 3½ x 1½. Shpg. wt., 3 lbs.

KT-119A — Complete Kit-less Case and Battery.

Net 27-50

Pattery 9V BURGESS 2N6.

### DIAMOND STYLI AT LOWEST PRICES ANYWHERE

### LAFAYETTE DIAMOND and DIAMOND-SAPPHIRE STYLI MADE FOR LAFAYETTE BY THE FOREMOST AMERICAN MANUFACTURERS

#### KEY TO POINT CODES HOW TO ORDER

explained in the table below.

SINGLE 1 MIL MICROGROOVE FOR 331/3 AND

AG -- SINGLE 2 MIL ALL GROOVE FOR ALL SPEEDS

ST = SINGLE 3 MIL STANDARD FOR 78 RPM COMB - DUAL 1 MIL DIAMOND AND 3 MIL SAPPHIRE

Identify your needle by cartridge number and illustration and order by stock no. Note that all all needles listed here are for monaural cartridges.

NO. PT. FIG.

#### ALL DIAMOND STYLI ARE NOT ALIKE

The symbols in the column headed "PT SIZE" are Only Lafayette's Superior Diamond Styli are MADE FROM WHOLE DIAMONDS PRECISION
GROUND AND POLISHED VERTICALLY AND
EDGEWISE GRAIN ORIENTED

SHADOWGRAPHED Each Lofayette's diamond stylus is made from individ-ual diamond, preperly eri-ented and ground to close telerance; shadowgraph tested to give you less wear per play and long service life.

FULL I YEAR GUARANTEE ANY DIAMOND or DIAMOND-SAPPHIRE NEEDLE IN THIS LISTING

CARTRIDGE

### 34 -DIAMOND NEEDLES

FOR ADMIRAL CARTRIDGES	FOR MAGNAVOX CARTRIDGES	FOR RONETTE CARTRIDGES		
PS-10 LP 1 409A11, 409A300, 98A34-1 JPS-30LPD PS-16 COMB 6 409821 JPS-3SSD ABILPD	P5-35   LP   54  560176, 560180   CRA-55LPD P5-70   COMB  51  560161   5-665D	PS-35 * LP		
FOR ASTATIC CARTRIDGES	FOR PHILCO CARTRIDGES	*The open end type (Fig. S4) replaces both Fig. S3 and S4		
1 1 (AC Saries AOT A) 7 40.1 A1.11	PS-56 COMB 43 45-9612, 76-4649, 425-0016 PH-1350	FOR SHURE CARTRIDGES		
P3-20 LP 3 42-1, 90T series, 10L-3, 11L-3	PS-56 COMB 43 45-0009, 425-0011, 425-0014 PH-135D	PS-16 COMB 6 WC10, WC10D, PC2 series, PC3 JP5-355D		
PS-23 [LP   12   408   M-70LPD		PS-10 COMB   Series, PC4 series, PCS series		
PS-25 COMB 14 GCD, 409, 55-T, 55TJ, 55TM A-715D	TOD DEPOSTUUM CONTR CARTRIDGES	( P.72, P.73, P.73R, P.75, P.76,		
PS-23 LP 12 410 M-70LPD	FOR PERPETUUM EBNER CARTRIDGES	PS-10 LP 1 P-77, P-80, W-21, W-21AR, JPS-30LPD		
PS-17 LP 7 QT-33, 44-7, 46-1, 48-1, A-81LPD	PS-64 COMB 47 P12/RG RXSSOSD RXS51SD RX551SD	W-22A, WC-24, WC-25 Series		
1/ 1667 Series	PS-66 LP 22 P7000 (MJ, MD) (LP enty) RXSS2LPD	FOR SONOTONE CARTRIDGES		
PS-35 LP 54 118, 120, 124 series, 310T, 312T, 420, 422, 424TS series, 310-1, 310-18, TS, 312-TB, CRA-SSLPD	FOR R.C.A. CARTRIDGES	P5-70 COMB S1   1P-L8-10, 2T0, 2T5, 2T-S0, 2T-L8-50, 2T-L8-50, 2T-L8-50, 2T-L8-50, S-6650   ST-L8-5, ST-L8-50		
FOR MAGNAYOX CARTRIDGES	PS-23 LP 12: 74067   M-70LPD   PS-10 LP 1   SS652,76257,(988370-1),75044   JPS-30LPD	PS-32 COMB 51 3T, 3TS, 3TO S-6150		
	PS-20 LP 3 76257, (988370-2) A-75LPD	FOR WEBSTER ELECTRIC CARTRIDGES		
\$ \$60176, \$60180		N		
PS-51 COMB 37 360133, 560151, 560169-1, M-SOSD		PS-17 LP 7 BX A-81LPD		
( \$60170	PS-25 COMB 14 100329 A-7150	PS-10 LP 1 F11 JPS-30LPD		

### REPLACEMENT STYLI FOR GE CARTRIDGES

.98

PK-237

STOCK SIZE

FOR GE VR II CARTRIDGES (FIG. 35)

Direct replacements for clip-in styli in GE VR II series models 4G-050, 4G-052, 4G-040, 4G-041, 4G-063, 4G-061, 4G-061, 4G-063, 4G-061, 4G-

PS-48-1 mil diamond LP clip-in stylus. Replaces GE 4G-010
PS-546-1 mil sapphire LP clip-in stylus. Replaces GE 4G-015
PS-548-3 mil sapphire 78 clip-in stylus. Replaces GE 4G-035

MODERNIZATION ASSEMBLIES (FIG. 33)

Madernize your eld triple-play cartridge. These assemblies replace both and new series "A." Once installed, you can replace one paint at a time.

DUAL DIAMOND, Repletes eld GE RPJ-012 and new RPJ-012A. PS-79-list 49.95

DUAL SAPPHIRE, Replaces old GE RPJ-010 and new RPJ-010A. PS-545—list 5.95

STYLI FOR OLD TYPE GE CARTRIDGES (FIG. 32)

P5-45-Diamond 1 mil (LP) replaces GE RPJ-004 P5-541—Sapphire 1 mil (LP) replaces GE RPJ-005 P5-540—Sapphire 3 mil (78) replaces GE RPJ-001

DUAL DIAMOND

LAFAYETTE

SPECIAL STYLUS

LAFAYETTE SPECIAL VALUE

STYLUS PRESSURE GAUGE

Net 99c

INSPECTION MICROSCOPE

P5-78 FOR GE SERIES A CARTRIDGES (FIG. 34) Individual styli replacements that clip in to all GE \*\*A" series.

Net 7.95
P5-47-Diamond 1 mil (LP) replaces GE RPJ-010
P5-543-Sapphire 1 mil (LP) replaces GE RPJ-015
Net 2.10
P5-542-Sapphire 3 mil (78) replaces GE RPJ-035

With this pocket-sized inspection microscope you can exomine your stylus tip for signs af weor, imperfections, general candition. Its 50X magnification is enough to provide a good, clear image for observation. The "objective" end has a curved metal guard which reflects light source for strong illumination, the slit in the guard also enables the centering of stylus in microscope field. On be used with any stylus, Hos adjustable objective lens. Site 3%" long x ½" diam. Shpg. wt., 8 az.

PM-237

Net .98

With the oavent at sterea records, correct stylus pressure becomes all important in obtaining the best reproduction and least stylus and record wear. Lafbyette's stylus pressure gouge is an accurate device that oflows you to read with the pickup in normal playing position. Range, 0.30 gm. No spring and minimum moving ports. Shpg. wt., 1 lb.
PK-223

DIAMOND STYLI FOR 6

89

AS LOW AS

### STEREO DIAMOND STYLI AT LAFAYETTE'S LOW PRICES!



FOR RONNETTE (A). .7 mil diamand for Ronnette turnover cartridges OV, OV1, T1 and single BF40.
P5-81 \$3.49



FOR ELECTRO VOICE
(B). .7 mil diamond for Electro Vaice series 26 stereo turnover and series 21 single needle. P5-80 \$3.49



FOR SONOTONE
(C). Cambination .7 mil (stereo) diamand and
3 mil (78 RPM) sapphire for Sonatane 87.
P5-82 \$3.49

FOR COLUMBIA .8 mil diamond for Columbia SC-1 dge.

FOR R C A

(E) .7 mil diamond for RCA 106770 or 106771.

FOR MONARCH (BSR) (F) .7 mil diamond for TC8S Cartridge. P5-86 \$3.49

### RECORDER PATCH CORD



IDEAL FOR MAKING CONNECTIONS FROM RADIO, PHONO OR TV TO TAPE RECORDER.

Handy 6 ft. lead has insulated alligator clips at one end and RCA phono plug of the ather. Supplied with shielded phono plug adopter to adapt the RCA phono plug to standard phono plug if necessary. Attach alligator clips to speaker terminals and simply plug other end into tape recorder. Ideal for recording fram Radio, Phano ar TV.

M5-565

MS-565

### NEW! EXCLUSIVE LAFAYETTE STYLOCHRON



- PROTECT YOUR PRECIOUS RECORDINGS.
- NO MORE GUESS WORK -KEEPS AN ACCURATE RECORD OF NEEDLE USE.

More precious recordings are ruined by tardy replocement of the needle than by any other cause. Now, there is no of the needle than by any other cause. Now, there is no the needle this happen, especially to your doubly precious need to let this happen, especially to your doubly precious needle that been in use so that you can stered recordings. Lotoyette Stylachron lets you that you can how long your needle that been in use so that you can replace the worn needle at the proper time, before it can how long your needle to the proper time, before it can how long your need to the proper time, before it can how long to your record. The Stylachron is quickly and replace the worn month your record changer or furniable stops. The 1000 hour dial will tell you at store the stylachron begins to register. It stops when place. The Stylachron begins to register. It stops when the store long you hove been using the needle. Did the turntable stops. The 1000 hour dial will tell you at time how long you hove been using the needle. Did the turntable stops. The 1000 hour dial will tell you at time how long you hove been using the needle. Did not time the stop of the target of the lace plate is 2½." Estends 1½." below for inspection of any predetermined number of the lace plate is 2½." Estends 1½." below or behind panel. Complete with instructions. Shop. Net 4.95. px.224 PK-224

LAFAYETTE HIGH FIDELITY STEREO- MONAURAL

● TESTS RUMBLE EACH CHANNEL ● TESTS LEVEL EACH CHANNEL ● TESTS BALANCE • TESTS EQUALIZATION • STYLUS WEAR TEST • TESTS RESO

NANCE HELPS TUNE BASS REFLEX BAFFLES

NANCE O HELPS TUNE BASS REFLEX BAFFLES

A Ladoyette exclusive to help you check both stereo and monoural systems. For stereo testing this two-sided 12" (i.P. stereo record has an its stereo side two 1000 cycle bonds to check the level of each channel separately; tendered the stereo channel separately; tendered the stereo from 30 to 15,000 cycles, to test for resonances of lone or of cabinet and o 300 cycle to 20 cycle step band in the level of each chonnel in the level of eac

### MINIATURE HI-FI AUDIO MIXER

With this handy, small mixer yau can onnaunce titles before playing records, mix two high impedance microphone inputs or perform any other mixing operation where 2 high impedance input channels are converted to a single mixed high impedance input channel. Each input channel has its own easy acting level control for quiet mixing; all mounted in shielded, chrome plated housing. Has 2 RCA type female input jacks and one male RCA plug on output side. Overall size 2¾" x 1¾" x ¾". Shay, wt., ½ lb.

PK-239 AUDIO MIXER



PK-242 AUDIO MIXER—Same quality and characteristics as PK-239 except output is standard Phane Plug. Size 31% "x 1 1%" averall. Net 1.75

PK-243 AUDIO MIXER—Same quality and characteristics as PK-239 except output is standard Female Mike Connector. Inputs consist of 2 Male Mike Cannectors. Size 2½" x 1½" x ½" overall. Net 1.75 3 SPEAKER SELECTOR



#### Convenient Screw Connections **Easily Panel Mounted**

Convenient rotary switch permits selection of any speaker ar combination of 2 or 3 speakers from a remate location. Attractively finished in gold metal with black and ivary ratary switch. Dimensions are 3½" x 4½" x 2½".

MS-567

1.80

#### PHONO PIN JACK SINGLE HOLE MOUNTING 15c ea.10 for \$1.35

RCA type female input jack. Mounts securely in single 1/4" hole by means of locknut on jack. Screws, nuts 

JUMPER LEAD KIT





KIT OF 10 COLOR CODED 14" LEADS

10 handy 14" leads with miniature insulated alliga-tar clips attached to each end. Clips and leads color coded, 5 pairs each a different calar, Ideal far serv-

### NEW LAFAYETTE-GOODMANS 3-WAY EXTRA-VALUE HIGH FIDELITY SPRAKERS

● 1½ LB. TO 6½ LB. MAGNETS OF "ALCOMAX"—THE MOST EFFICIENT MAGNETIC MATERIAL AVAILABLE! ● FREE-EDGED CONE SUSPENSION MADE BY EXCLUSIVE GOODMANS PROCESS • 12" AND 15" MODELS, ALL 3-WAY WITH SMOOTH LOW-, MID. AND HIGH-FREQUENCY COVERAGE • ALL MODELS HAVE SPECIAL LOW-RESONANCE WOOFER CONES, STIFF MID-FREQUENCY RADIATOR COMES, COMPRESSION-DRIVER TWEETER HORNS • FREQUENCY RESPONSE 30-20,000 CPS • HIGH POWER-HANDLING CAPACITY ● HIGH EFFICIENCY WITH LOW-DISTORTION TRANSIENT RESPONSE ● WIDE DISPERSION-ANGLE TWEETER WITH SELF-ALIGNING ALUMINUM VOICE COIL & DIAPHRAGM PLUG-IN 12 DB/OCTAVE CROSSOVER NETWORK WITH HIGH FREQUENCY LEVEL CONTROL SUPPLIED WITH ALL MODELS

SUPPLIED WITH ALL MODELS

LAFAYETTE went to this leading English speoker monufacturer for these outslanding custom speakers to provide you with this SUPER-PERFORMANCE VALUE by direct importation. These speakers are all 3-way units, with woofer, mid-range radiator and tweeter all axially mounted to provide an efficient, law distortion, wide-range speaker system. Available in 12" and 15" models, all speakers system. Available in 12" and 15" models, all speakers employ extremely heavy Alcomax magnets—the most efficient magnetic material ovailable—for converting electricient magnetic material ovailable—for converting electricient mustical program material. In the exclusive Goodman process used in manufacturing the woofer cones of these speakers, the cane rolls and cone edges are bomborded with minute particles of specially-blended plastic ma-

terials to form a virtually free-edged cone suspension without the usual joint faults found in so-called free-edged cones and eliminating standing waves and surround resonances. Frequency response of all models is 30-20,000 cps, vaice cails are all 16 ohms. Free-air woofer cane resonances are 25 cps far 15" models, 35 cps far 12" models. At 2000 cps the stiff-coned mid-frequency radiator provides smooth mechanical crossaver; the compression driver tweeter has a rigid plastic harn with 2½" circular mouth, 1" diometer aluminum voice coil and diaphrogm in a self-aligning assembly with an oir chamber and phase equalizer and utilizes the plug-in 12 db per actove electrical network far smooth crossover at 5000 cps. The network has a high-frequency level contral with attractive escutcheon and knob.

MADE BY THE FAMOUS GOODMANS English M'f'r Of Some Of The World's Best Hi-Fi Speakers! CUSTOM BUILT TO LAFAYETTE'S OWN RIGID SPECIFICATIONS



BHLY 10% DOWN EASY TIME PAYMENTS

Only 44.50 Ea. Net

Only 51.50 Ea. Net

SK-110—12" 3-way speaker with 134 lb. magnet.

### LAFAYETTE-GOODMANS 11/2 LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

GET 2 FOR STEREO

GET 2 FOR STEREO

● 12" SPEAKER WITH 30-WATT POWER RATING ● 15" 35

WATTE ● WITH PHIG-IN 12 DB PER OCTAVE L/C (ROSSOVER

WATTE ● WITH PHIG-IN 12 DB PER OCTAVE L/C (ROSSOVER) WATTS • WITH PLUG-IN 12 DB PER OCTAVE L/C CROSSOVER NETWORK & L-PAD LEVEL CONTROL

#### SK-110 3-WAY 12" SPEAKER

Another highly efficient integrated 12" 3-way speaker system with response of 30-20,000 cps, cane resonance 35 cps, and power rating of 30 watts program material; dimensions 7" averall depth, 12\%" diam. Magnetic flux density 11,500 gauss; total flux 129,000 maxwells. 1\%"

14 LB. MAGNETS 12 db /Octave 30-WATT 12" 47.50 L/C Crossover with L-Pad

35-WATT 15" 54.50

### LAFAYETTE-GOODMANS 31/2 LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

● 40 WATTS POWER RATING OF 12" SPEAKER ● 15" 45 WATTS HEAVY DIE-CAST NON-RESONANT FRAMES 12
DB PER OCTAVE CROSSOVER WITH L-PAD HIGH-FREQUENCY
LEVEL CONTROL 25-35 CPS WOOFER RESONANCE

### SK-112 3-WAY 12" SPEAKER

SK-112 3-WAY 12" SPEAKER

This is a 3-way integrated 12" speaker system whose performance can only be compared, in other makes, to the very best available. The superior efficiency of the 3½ lb. Alcomax magnet with total flux of 185,000 maxwells plus the excellent constructional details, the exclusive Goodmans cone bonding and treatment process, the 35 cps cone resonance, the superb Goodmans horn-loaded compression-driver tweeter, the heavy, non-resonant dis-cast metal trame—oil are combined to provide another LAFAYETTE SUPER-PERFORMANCE VALUE, made possible only by its


custom specifications and by direct importation to save you maney. Specifications are similar to the other Lafayette-Goodmans 12" speakers listed on this page, except power rating is 40 watts program moterial, voice coil diam, is 1%" and overall depth is 8%". Sppg. wt., 25 lbs. 5K-112-12" 3-way specker with 31/3 lb. magnet Net 69.50

Only 63.50 Ea. Net GET 2 FOR STEREO GET 2 FOK STEREO Only 63.50 Ea. Net SK-113.—3-way 15" with 3% lb. magnet. Same as SK-112 but 15" speaker with 25 cps cone resonance, power rating of 45 watts, voice coil diameter 2", total flux 201,000 maxwells. 8\%" deep, 15\%" diam. Shpg. wt., 30 lbs.

Net 79.50

Only 72.00 Ea. Net GET 2 FOR STEREO

31 LB. MAGNETS 40-WATT 12" 69.50 45-WATT 15" 79.50 12 db/Octave L-Pad Control



### LAFAYETTE-GOODMANS 61/2 LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

● 12" SPEAKER HAS 45 WATT POWER RATING ● 15" 50 WATT COMPLETE WITH PLUG-IN 12 DB PER OCTAVE L/C CROSSOVER NETWORK & L-PAD LEVEL CONTROL . HEAVY, DIE-CAST NON-RESONANT FRAMES

### SK-114 3-WAY 12" SPEAKER

A highly-efficient 3-way 45-watt speaker far faithful re-production of the complete audible spectrum without tane coloration or distortion. Response 30-20,000 cps. Hos ex-clusive Goodmans special process woofer cane with 2" diameter aluminum voice cail and cone resonance of 35 cps, 6% lb. Alcomax magnet [the most efficient magnetic material available], stiff-caned mid-range radiator with 2000 cps mechanical crossover, and harn-loaded compres-sion-type tweeter with self-aligning aluminum voice cail and diaphrogm. Magnetic flux density is 14,500 gauss;

total flux is 227,000 maxwells. Supplied with 5000 cps plug-in 12 db per octave electrical network with high frequency level control. 16 ohms impedance. Rated at 45 wats power handling copacity with Integrated program material. Ruggedly constructed heavy die cast metal frame minimizes frame resonances; with screw terminals for easy connections, socket for plug-in crossover network and level control harness. Dimensions: 8½" overall depth, 12½" diam.; tokes 11" diam. baffle opening. Shpe. wt., 35 lbs. 5K.114—12" 3.way speaker with 6½ lb magnet. 5K-114-12" 3-way speaker with 61/4 lb. magnet. Net 79.50

... Only 73.50 Ea. Net GET 2 FOR STEREO ... GET 2 FOR STEREO Only 73.30 Ed. 15%
SK-115—3-way 15" with 6½ lb. magnet. Same as SK-114
but 15" speaker, with power roting of 50 walts and cone
resonance of 25 cps. 8½" deep, 15½" overall diam.; reresonance of 25 cps. 8½" deep, 15½" overall diam.; requires 13" diam. boffle opening. Shpg. wt., 40 lbs.

Net 89.50

Only \$2.00 Ea. Net GET 2 FOR STEREO

6½ LB. MAGNETS 45-WATT 12" 79.50 50-WATT 15" 89.50



### NEW! LAFAYETTE 8" HI-FI SPEAKER

. "MECHANICAL 2-WAY" SPEAKER OF UNUSUAL DESIGN . EXTRA-HEAVY MAGNETS. EXTREMELY HIGH FLUX . RESPONSE 40-16,000 CPS . SPECIAL PATENTED CONE CONSTRUCTION AND MATERIAL FOR SMOOTH, DISTORTION-FREE RESPONSE · EXCELLENT FOR STEREO

A most unusual dual-cone construction is used in these extra-high-quality 8" speakers to ecanomically provide the same type of wide-range frequency response normally found only in true caoxial speakers or multiple speaker systems. There are 2 separate cones, acting-through a common voice coil. The auter edge of the tweeter cone is attached to the mid-section of the wooder cone; both cones "floot" on flexible, carrugated edges. This maunting, plus apertures provided behind the wooder cone, results in mechanical crossover so that both canes aperate in phose at low frequencies, but only the tweeter cone operates at high frequencies. This gives improved high frequency directional

choracteristics and minimum distortion. The patented cone materials provide extremely smooth reproduction. Magnets are large and heavy, with flux density of 10,500 gauss and total flux of 56,000 maxwells. Their high efficiency means good transient characteristics, low distortion, and good response at either high or low sound levels. Terminals are screw-type for solderless connections. Sensitivity is 99.5 db/watt; resonance is 55-70 cps; vacice coil is 8 of max. Size is 8" diam", 4"" deep; requires 6%" diam. baffle apening. Shpg. wt., 5% lbs.

SK-98 8" 2-WAY SPEAKER

Net 9.95

GET 2 FOR STEREO

Only 18.95 Net

Net 14.50



### NEW! LAFAYETTE DUCTED-PORT BASS REFLEX SPEAKER ENCLOSURE

• RECOMMENDED FOR STERED • NEW DESIGN FOR WIDE-RANGE RESPONSE IN A SMALL PACKAGE . ECONOMICAL-SPACE SAVING . FOR 8" OR 6" SPEAKER

An unusually-designed enclosure which extends law-frequency response to a remarkable degree, incorparates a special long duct over the usual bass reflex part which acts together with the and smoothness of response at low frequencies. Suitable for 8" or 6" wide-range or caoxiol his rabble-top maunted. Available in Blande Mahagany, Mahagany, or Walnut fiinishes. Size 11½" x 18" w x 9" d. Shpg. wt., 15 lbs.

CAB-29 Blande Mahagany, Mahagany, or Walnut Enclosure.

Please specify your choice ...

FAMOUS LAFAYETTE SK-58 12" COAXIAL

Reg. Value 44.50 Net 29.50

BUILT-IN CROSSOVER COMPLETE WITH
BRILLIANCE CONTROL

SHEEPSKIN "FREE-EDGE" CONE MOUNTING

. 20-WATTS RATING . 1 1/4 LB. MAGNET

### LAFAYETTE EXCLUSIVE

This exclusive lafayette import has become nationally fomous for its exceptional value. An extremely hish quality speaker, frame, 12" woafer section with sheepskin edges and specially processed fibre cone material for freedom from distortion and tweeter has a front-mounted diffusion screen for wide dispersion of the high frequencies; with the built-in 3000 cps cross-panse of 30-15,000 cps. Woafer resonance is 40 cps; power handling capacity of the speaker is 20 wats continuous, 35 made to screw-cap terminals. If made in this country, this speaker would sell for at least \$49.50. Shpg. wt., 11 lbs.

Net 29.50

...Net 29.50

### **ECONOMY HI-FI** COAXIAL SPEAKERS



8"-\$6.25 12"-\$8.75 15"—\$13.75 6 x 9 - \$7.95

#### ECONOMY 8" COAXIAL HI-FI SPEAKER

IDEAL WIDE-RANGE BUOGET SPEAKER . PER-FECT FOR STEREO • RESPONSE 70-12,000 CPS • BUILT-IN CROSSOVER • 10 WATT RATING • 3.16

OZ. MAGNET

A fine coaxial high fidelity speaker with built-in electronic crossover. Rated at 10 watts, with response of 70-12,000 cps. Rigid, non-resonant frame, high efficiency 3.16 oz. Alnico 5 magnet, specially-treated langlife cone, and gasket-sealed magnet cover contribute to its fine performance. 8 ohm vaice cail. Shap. wt., 6 lbs. SK-92.... LAFAYETTE ECONOMY SPECIAL! Not 6.25

### 12" COAXIAL SPEAKER

EXTENDED RANGE DUAL SPEAKER
SYSTEMI FOR FM OR AM RADIO,
TELEVISION, SOUND AND WIDE
RANGE RECORD PHONOGRAPHS.
QUICK, EASY, MODERNIZING REPLACEMENT OF OLD STYLE SINGLE RANGE SPEAKERS.

12" Alnico V PM with 1" voice coil and heavy one piece cone. Specially designed 3" Alnico V PM tweeter completes this combination speaker, range 40 to 15,000 CPS. Built-in high pass filter. Installs same as regular PM speaker, only two wires to cannect. 6.8 oz. Alnico V magnet. Impedance 8 ohm. Wt. 8 lbs.

SK-93

### ECONOMY 15" COAXIAL HI-FI SPEAKER RATED AT 20 WATTS 5" TWEETER

BUILT-IN 1800 CPS CROSSOVER RESPONSE 45-12,000 CPS

This duol-speaker system provides clean, extended response of 45 to 12,000 cps. Includes 15" woofer with cooxially mounted 5" tweeter and built-in 1800 cps crossover. Heavy, non-resonant frome, anti-carrosian treated; 6.8 az. Alnico 5 magnet, 8 ohm vaice cail. 20 worts power rating. Shpg. wt., 13 lbs. SK-89 LAFAYETTE ECONOMY SPECIAL! Not 13.75

### 6x9 "Twin-Tweeter" COAXIAL HI-FI SPEAKER

. EXCELLENT BASS RESPONSE . BUILT-IN CROSSOVER

ADD HI-FI TO AUTOS, TV, RADIO SETS

This 6" x 9" hi-fi coaxial speaker apens new possibilities for high-fidelity reproduction. Compact enough for your car, for radio and television sets—and for the high-fidelity enthusiast with a space problem. Twin high-frequence tweeters are designed to cross over mechanically at 5000 cps. The excellent bass characteristics of the 6 x 9 woofer faithfully cores. faithfully reproduce the low frequencies. High-energy Al-nico 5 magnet; voice cail ¾" diam. Power handling nico 5 magnet; voice coil ¾" diam. Power handling capacity 4 watts (7 watts on peaks). 4" deep. Impedance 3.2 ohms. Shpg. wt., 21/2 lbs.

SK-75 - 6" x 9" hi-fi speaker..

10.95

### ACOUSTIC BAND EXTENDER Converts Any 12" Hi-Fi Speaker To A Complete 4-Way System MOUNTS AXIALLY ON 12" SPEAKER

ELIMINATES EXTRA

CARPENTRY 3-WAY INTEGRATED

SPEAKER FROM 1,000 to 18,000 CPS

25 WATTS RATING


BUILT-IN CROSSOVER

A real baan to the hi-fi enthusiast who has a single speaker and wants to kextend the upper tanal range of his system and at the same time improve extend the upper tanal range of his system and at the same time improve extend the upper tanal range of his system and fuller enjoyment. The Acousthe vital middle ranges for better realism and fuller enjoyment. The Acousthe vital middle ranges for better realism and fuller enjoyment. The Acousthe based on the control of the control BUILT-IN CROSSOVER

### LAFAYETTE 2-3 WAY SPEAKER SYSTEMS & ENCLOSURES

### Economy Prices - SAVE 25% to 50%





### 15" HI-FI LOW FREQUENCY WOOFER 31.5 OZ. ALNICO MAGNET 2D TO SOOO CYCLES—35 WATTS

• 2D TO 5000 CYCLES—35 WATTS

This efficient 15" low frequency woofer incorporates many exclusive features. For original equipment or replacement, it provides highly efficient extended low-frequency response. Ideal for assembling 2 and 3-way speaker systems. Handles 35 watts of oudio power. Frequency response ± 2 db 20 CPS to 1000 CPS, /ond ± 5 db from 20 CPS to 5,000 CPS with proper baffling. Voice coil dio. 2", impedance 8 ohms. 31.5 oz. Alnico V magnet. Finished in beautiful brown enomel. Cone is seamless type, permonently bound to voice coil. 5hpg. wt., 13½ lbs. Cone Resonance 45 cycles

5K-67

Nel 23.95 5K-67

### 12" HI-FI LOW FREQUENCY WOOFER

21.5 OZ. ALNICO V MAGNET-25 WATT 21.5 OZ. ALNICO V MAGNET—25 WATI
Provides efficient, extended low-frequency response
of ± 5 db from 35 to 8000 CPS, and features 25
wotts of power handling capacity. Perfect for highfidelity installations or for modernization of older
equipment. Ideal for assembling 2 and 3-way
speaker systems at a budget price. Enclosed magnet structure—completely dust-proof. Compliance of
outer cone and inner spider carefully calculated for
best bass response. 21.5 az. Alnica V magnet, 1½"
dio. voice coil, 8 ohm impedance. All exposed surfaces are finished in beautiful brown enamel. Shpg.
wt., 8 lbs. Cone Resonance 50 cycles
SK-68
Net 16.50

Net 16.50 SK-68

8" MID-RANGE WOOFER 6.50



A low frequency boss reproducer, free from distortion and capable of clean reproduction down to 40 cycles. Ideal for use with tweeters and crossover networks to make up a 2-way or 3-way system. Can also be used with additional speakers as a multi-speaker woofer. Perfect, too, as mid-ronge unit in low cost 3-way systems. Crossover at 350 CPS; frequency response 350-13,500 cycles; suitable for crossover to 5000 cycles. Impedance 8 ohms. Cone Resonance 150 cycles.



### GE 12" PM HI-FI SPEAKER

- HANDLES 25 WATTS
- 14.5 OZ. ALNICO V
- MAGNET • FREQUENCY RESPONSE
- 50-15,000 CPS
- · ALUMINUM VOICE
- COIL

### IMPORTED FROM DENMARK



### ROYAL DANISH 12" DUAL CONE SPEAKER

Net 7.95


- HIGH FIDELITY MODEL
- RANGE: 45-14,000 cps.
- . HIGH FLUX DENSITY

Lafayette brings you this fine imported high fidelity speaker at a fraction of the price you would expect to pay for so much quality. Two canes are mounted an a single axis, and provide remarkable wide range frequency response from 45 to 14,000 cps. Reproduction of program material is exceptionally lifelike throughout the entire range. An exclusive, special formula cone rim treatment eliminates cone rim resonance and distortion. Also, the damping effect improves transient response and prevents "hongover". Overall depth, 5:3/16". Campletely enclosed, 1" diameter voice coit with an impedance of 6 ohms. Shap, wt., 6 lbs.

SK-86. 12" Qual Cone Hi-Fi Speaker.... Net 7.95

ohms. Shpg. wt., 6 lbs. SK-86. 12" Duat Cone Hi-Fi Speaker ...... Net 7.95










UNIVERSAL LOWBOY
BASS REFLEX ENCLOSURE

CAB-14-20-22

BASIC INTERNAL CONSTRUCTION OF LAFAYETTE UNIVERSAL HI-FE



### LAFAYETTE HI-FI SPEAKER ENCLOSURES FOR UNITARY 2-WAY-3-WAY SPEAKER SYSTEMS

LAFAYETTE RESONATOR ENCLOSURES

THE CABINET—New, lowboy consolette resonator cabinet for 12" high fidelity speakers. Completely assembled and finished unit constructed of 34" stock of the finest genuine mahogany and walnut veneers. Solidly built and acoustically designed to provide wide range frequency response without reverberation or vibration. Cabinet is lined with acoustic material to prevent cabinet resonance. Front panel has at-

### LAFAYETTE UNIVERSAL HI-FI SPEAKER ENCLOSURES

LAFAYETTE UNIVERSAL SPEAKER ENCLOSURES are "universal" in the sense that almost any combination of speakers can be installed in the cabinet. Has cutout for 15" speaker plus adapter for 12". Also a cutout for 84" or 8" speaker plus adapter for 5" and blank wood block if

such speakers are not desired. In addition, a tweeter opening is pro-vided for most standard tweeters, plus adapter for Lafayette HK-3, HW-7 or Lafayette-Goodmans SK-104 tweeters plus blank wood block if no tweeter is used.

#### UNIVERSAL BASS REFLEX ENCLOSURES

Solidly constructed of ¾" stock. Finished models of genuine veneers of the original wood. Universal speaker panel is detailed with picture frame molding and covered with pleasing plastic grille. 5" tapered offset legs are edge-tipped with brass ferrites. Lined internally with acoustic material. Size of lowboy (less legs): 28½" w, 23½" h, 16¾" d. Same

size for highboy with height and width interchanged. Shpg. wt., 54 lbs.
CAB-13—Highboy; CAB-14—Lowboy. Unfinished
CAB-19—Highboy; CAB-20—Lowboy. In Mahogany or Blonde (please specify finish)
CAB-21—Highboy; CAB-22—Lowboy. In Walnut
Net 52.50

#### SPECIAL MONEY SAVING COMBINATIONS-LAFAYETTE CABINETS AND NATIONALLY FAMOUS SPEAKERS COMBINATIONS WITH LAFAYETTE UNIVERSAL CABINETS.

Stack No.	Speaker	Enclosure	Reg. Price	Special Combin- ation Price
5Y-179	University 6303	CAR-13	120.84	99.50
5Y-180	University 6303	CAB-19	130.84	109.50
5Y-181*	University 6303	CAB-21	133.84	112.50
5Y-182	University 6303	CAB-14	120.84	99.50
5Y-183	University 6303	CAB-20	130.84	109.50
5Y-184*	University 6303	CAB-22	133.84	112.50
SY-185	University 312 University 312 University 312 University 312 University 312 University 312	CAB-13	108.10	90.95
SY-186		CAB-19	118.10	100.95
SY-187		CAB-21	121.10	103.95
SY-188		CAB-14	108.10	90.95
SY-189		CAB-20	118.10	100.95
SY-190		CAB-22	121.10	103.95
\$Y-191	Electro-Voice 12TRXB	CAB-13	104.18	84.75
\$Y-192	Electro-Voice 12TRXB	CAB-19	114.18	94.75
\$Y-193	Electro-Voice 12TRXB	CAB-21	117.18	97.75
\$Y-194	Electro-Voice 12TRXB	CAB-24	104.18	84.75
\$Y-195	Electro-Voice 12TRXB	CAB-20	114.18	94.75
\$Y-196	Electro-Voice 12TRXB	CAB-22	117.18	97.75
\$Y-197	Electro-Voice 15TRXB	CAB-13	116.92	93.50
\$Y-198	Electro-Voice 15TRXB	CAB-19	126.92	103.50
\$Y-199*	Electro-Voice 15TRXB	CAB-21	129.92	106.50
\$Y-200	Electro-Voice 15TRXB	CAB-14	116.92	93.50
\$Y-201	Electro-Voice 15TRXB	CAB-20	126.92	103.50
\$Y-202*	Electro-Voice 15TRXB	CAB-22	129.92	106.50
\$Y.203	Jensen H223F	CAB-13	112.00	93.75
\$Y.204	Jensen H223F	CAB-19	122.00	103.75
\$T.205	Jensen H223F	CAB-21	125.00	106.75
\$Y.206	Jensen H223F	CAB-14	112.00	93.75
\$Y.207	Jensen H223F	CAB-20	122.00	103.75
\$Y.208	Jensen H223F	CAB-22	123.00	106.75
\$Y.209 \$Y.210 \$Y.211* \$Y.212 \$Y.213 \$Y.214*	Jensen CX120 Jensen CX120 Jensen CX120 Jensen CX120 Jensen CX120 Jensen CX120	CAB-13 CAB-19 CAB-21 CAB-14 CAB-20 CAB-22	89.00 99.00 102.00 89.00 99.00	76.50 86.50 89.50 76.50 86.50 89.50

	Stock No.	Speaker		Enclosure	Reg. Price	Combin- orion Price
2	5Y-215 5Y-216 5Y-217	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-110		87.00 97.00 100.00	84.00 94.00 97.00
	57-218 57-219 57-220	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	5H-110	CAB-14 CAB-20	87.00 97.00	84.00 94.00 97.00
	5Y-221 5Y-222 5Y-223	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-111	CAB-13 CAB-19 CAB-21	94.00 104.00 107.00	91.00
	\$Y-224 \$Y-225 \$Y-226*	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-111	CAB-14 CAB-20 CAB-22	94.00 104.00 107.00	91.00 101.00 104.00
	SY-228 SY-229*	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	5K-112	CAB-13 CAB-19 CAB-21	109.00 119.00 122.00	103.00 113.00 116.00
	57-230 57-231 57-232	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-112 SK-112	CAB-20 CAB-22	109.00 119.00 122.00	103.00 113.00 116.00
	\$7.233 \$7.234 \$7.235 \$7.236	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-113 SK-113	CAB-13 CAB-19 CAB-21 CAB-14	119.00 129.00 132.00 119.00	111.50 121.50 124.50 111.50
	\$7.237 \$7.238*	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-113 SK-113	CAB-20 CAB-22	129.00 132.00	121.50 124.50
	57-240 57-241 57-242	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Boodmans	SK-114	CAB-13 CAB-21 CAB-14	129.00 132.00 119.00	123.00
	5Y-243 5Y-244*	Lafayette-Goodmans Lafayette-Goodmans	SK-114	CAB-20 CAB-22 CAB-13	129.00 132.00	123.00 126.00
	\$Y.246 \$Y.247 \$Y.248	Lafayette-Goodmans Lafayette-Goodmans Lafayette-Goodmans	SK-115	CAB-19 CAB-21 CAB-14	139.00 142.00 129.00	131.50 134.50 121.50
	SY-249 SY-250*	Lafayette-Goodmans Lafayette-Goodmans Walnut or Blonde fir	SK-115	CAB-20 CAB-22	142.00	131.50

COMBINATIONS WITH LAFAYETTE | Reg. | Combination | Reg. | Combination | Reg. | Combination | Combina RESONATOR ENCLOSURE
Stock No. | Speaker
Sty-2691 University UKC-122
Sy-270 University UKC-122

NOTE: FOR Combinations of Lafayette Deluxe Universal Cabinets and Lafayette-Goodmans 3-way speakers, see other pages.

5Y-274 Lalayette 5K-58
5Y-274 Lalayette 5K-58
5Y-275 Electro-Voice 12YRXB
5Y-276 Electro-Voice 12YRXB
5Y-2771 Jensen CX120
5Y-278 Jensen CX120

### **New! Lafayette** COMPRESSION-HORN TWEETER

 RESPONSE 1500-16,000 CPS • 20 WATTS • EXPONENTIAL HORN . FOR 2-WAY, 3-WAY OR 4-WAY SPEAKER SYSTEMS . WIDE-ANGLE DISPERSION OF HIGHS . FOR TOP OR IN-CARINET MOUNTING

A high quality compression-driver tweeter with o frequency response of 1500-16,000 cps and a continuous duty rating of 20 watts. Vertical positioning of the mouth of the exponential horn provides widest dispersion of high frequencies at ear-height. With chrome-placed fork-type swivel bose. Flux density is a high 13,500 gauss for greatest efficiency; crossover range is 2800 cps or higher, with 4000-5000 cps recommended for 3-way systems; the wide, smooth response ronge permits it to be used with 2-, 3-, or 4-woy speaker systems. The exponential horn is a heavy, one-piece costing non-resonant within the audible frequency range. Vaice coil impedance is 8-16 ahms. Chrome-plated screw terminals for easy connections. Overoll height with swivel stand is 4%"; width 2%"; behind-ponel mounting requires a rectangular cutout (long axis vertical) 1%" x 4-3/16", Shpg. wt., 3 lbs.

SK-105 Compression-driver Horn Tweeter .... Net 8,95

#### WOOFER \* 8" MID-RANGE SPEAKER \* HORN TWEETER · CROSSOVER NETWORK



This new multi-speaker system provides true high fidelity reproduction at the lowest piece ever. Indeed in the 3-way system are a Jensen 15" woofer, Jensen 8" mid-range speaker, Jensen 61" mortange speaker, Jensen 15" compression driver horn tweeter and Lafayette LN-3 capacitance-inductance crossover network. Crossover is at 350 and 5000 cycles, and unit is supplied with two, built-in, continuously variable "presence" and "brilliance" controls wired on 2-ft. extension cables, Outstanding bass and indihighest audible frequencies result in superb performance from this 3-way system throughout the entire audio spectrum. Power handling captacity in bass reflex enclosure, 25 watts. Impedance 16 ohms. Shpg. wt., 19 lbs.

5Y-98 Speak					Net	42.50
SY-97 Same	: as \$7.98	but	with	12"	Jensen	woofer
NEI						39.30

pletely assembled hass reflex cabinets constructed of %," wood, ready for finishing. Dimensions of highboy, less 29" H, 23½" W, 16" D. Lowboy same size with H and mensions interchanged. Legs are 5" H. Shig, wt., 42 lbs.

CAB-13- PREASSEMBLED UNFINISHED HIGHBAY CABINET	Net 39.50
CAB-14- PREASSEMBLED UNFINISHED COMBOT CABINET	Net 39.50
CK-10 Unfinished Highboy Speaker Cabinet Kit	Net 29.50
A44 11 11 11 11 11 11 11 11 11 11 11 11 1	

JENSEN 8 INCH MID-RANGE CK-10 Unfinished Highboy Speaker Cabinet Kit Unfinished Lowboy Speaker Cabinet Kit Net 29.50



### ACOUSTIC RESEARCH AR-1 & AR-2 SPEAKER SYSTEMS

Bosed on new "acoustic suspension" principle. Affords lowest bass harmonic distortion and extended low freq. response, AR-1 includes a 12" low-freq, mechanism and an 8" mid-ronge and high-freq. unit. Uniform response to 15,000 cps. AR-2 includes a 10" speaker and a tweeter in a cobinet slightly smaller than AR-1. Shpg. wt., AR-1: 60 lbs; AR-2: 45 lbs.

		•
ACOUSTIC RESEARCH A	R-1 (Mahagany or birch)	Net 185.00
ACOUSTIC RESEARCH A	R-1 (Walnut)	Net 194.00
ACOUSTIC RESEARCH A	R-1 (Karina)	Net 200.00
ACOUSTIC RESEARCH A	R-2 (Mahogany or birch)	Net 96.00
ACOUSTIC RESEARCH A	R-2 (Walnut)	Net 102.00
ACOUSTIC RESEARCH A	R-2 (Karina)	Net 111.00

### 2 OR 3 WAY CROSSOVER NETWORK



- 4 CROSSOVER FREQUENCIES
- . L PAD BALANCE
- EASY TO USE
- IMPEDANCE 16-OHMS

ot an unbeatable price. It can be used in a two-way system by crossing over at 500 cps or 3300 cps, and in a three-way system by utilizing the two simultaneously. The change from a 2-way to a 3-way 6 db per actions network may be accomplished easily. Complete with two level bolonce controls. Size: 5% x 2% x 2%". Shpg. wt., 21/4 lbs Net 8.95



Entire Cabinet Heavier Construction -Fully-Cured 47 White Birch Smoothly Sanded Ready for a Fine Finish Tweeter adapter Precision Design-Parts Fit Air-tight

LAFAYETTE UNIVERSAL HI-FI BASS REFLEX ENCLOSURE KITS

BASSREFLEX ENCLOSURE KITS

• EASIEST TO ASSEMBLE – ALL YOU NEED IS A

SCREWORIVER! • ½" WHITE BIRCH • PRECISIONCUT – FITS TOGETHER SMOOTHLY • PERFECT FOR
SINGLE WIDE RANGE, 2-WAY OR 3-WAY SPEAKER
SYSTEMS • HIGHBOY OR LOWBOY STYLE

All pieces of these carefully designed hass reflex high
fidelity speaker enclosures are accurately precut of ½"
veneers to fit snugly together and climinate spurious
resonances. Front panels are handsomely detailed with
picture-frame moulding and covered with pleasingly
decorative plastic acoustic grilles to blend with any
finish
and room decor. Attractively tapered offset legs are protected by good-looking brass ferrules. Acoustic liming maprovided for 15" speaker plus adapter for 12"; 8½" or 8" midrange plus adapter
for 5" and blank wood block if no midrange speaker is used: Jensen compression horn tweeter plus adapter for Lafayette HK-3, HW-7 or Lafayette
Goodmans SK-104 tweeters plus hlank wood block if no tweeter is used. Thus,
any single wide-range 12" or 15" speaker may be used, or any Lafayette 2- or
3-way speaker system, or almost any other combination of speakers. Kits are
supplied unfinished, smoothly sanded and ready for finishing. The lowthoy-style
cahinet dimensions are (less legs) 28%" w x 23½" h x 16¾" d; legs are 7"
high. Highboy has same dimensions with height and width interchanged,
instructions, all parts, hardware, and grille are included with each kit. Shpg.

Kt.10 Unfinished Highboy Enclosure Kit.

Net 29.50

wt., 54 lbs.
CK-10 Unfinished Highboy Enclosure Kit
CK-11 Unfinished Lowboy Enclosure Kit FINISHING KITS

To obtain professional-like furniture finishes. Include Ntain, filler, sealer, shellac, varnishes, finishing paper, brushes, and detailed instructions. Shpc. wt., 6 lbs.

FK-10 Walnut ... FK-20 Mahogany ... FK-30 Fruitwood ...
FK-40 Cherry ... FK-50 Golden Oak ... FK-60 Ebony ...
Net Each ... 5.81

Factory-Assembled Bass Reflex Enclosures
as the Lafayette kits above but factory-assembled and finished in lustrous,
rubbed mahogany or blonde to measure up to the finest standards of high
ty fine-furniture finishes. Also available assembled but unfinished. Shpx,

(AB-13 Assembled, Unfinished Highboy (AB-19 Highboy, Assembled, finished in Mahogany or Blonde (please specify) Net 39.50 Net 49.50 CAB-21 Highboy Assembled, in Walnut Finish. CAB-14 Assembled, Unfinished Lowboy. CAB-20 Mahogany or Blonde Lowboy, completely a (please specify choice of finish. Mahogany or Blonde Lowboy, completely assembled specify choice of finish) Net 49.50 CAB-22 Lowboy Assembled, in Walnut Finish Net 52 50

LAFAYETTE-GOODMANS High Fidelity Speakers FROM ONE OF ENGLAND'S



3-way SPEAKER SYSTEM

• HANDLES 30 WATTS • FAMOUS ENGLISH GOOD.

MANS-MADE 12\* WOOFER BY, MIDRANGE. COMPRESSION-DRIVER HORN TWEETER • LAFAYETTE L/C.

SION-DRIVER HORN TWEETER • LAFAYETTE L/C.

16.000 cps

Here is an outstanding 3-way high fidelity speaker system which we are indeed proud to be able to offer. It includes a group of speakers custom-made for Lafayette by Goodmans, famous English manufacturer of some of the world's best high fidelity speakers. The system is ideal for installation in Lafayette bass reflex speaker enclosures, and provides the extremely wide range of 30 to 16,000 cps (8 db down at 20,000 cps) smoothly and without unpleasant peaks. Power handling capacity of the system is 30 watts of integrated program material. Included in the system are the Lafayette-Goodmans SK-102 12" woofer covering the range from 30 to 700 cps, the Lafayette-Goodmans SK-104 compression - driver tweeter operating at from 5,000 cps to over 16,000 cps. Also included is the Lafayette LN-55 inductance-capacitance (L/C) crossover network with attached Brilliance (L/C) crossover network with attached Brilliance (L/C) crossover network with attached range) controls. System impedance is 16 ohms. This is a really great system at an unusually low price! Shpg. wt., 25 lbs.

SY-163 Lefayette-Goodmans
3-Way Speaker Sustem

5Y-163 Lafayette-Go Net 49.50 3-Way Speaker System

LAFAYETTE-GOODMANS 15" 3-WAY SYSTEM

An outstanding 3-way speaker system similar to SY-163 system above, but featuring the new SK-101 15" Lefayette-Goodmans woofer for extra high efficiency even of subaudible frequencies. System response 25 to 16,000 cps. Complete with LN-5 crossover network and 5K-103 8½" midrange speaker and SK-104 tweeter. A superb speaker system with wide, smooth response and onew low in distortion and tone coloration.

### LEADING SPEAKER MFR'S! Made to Lafayette's own rigid specifications LAFAYETTE-GOODMANS 15" WOOFER

An all new 15" low-frequency speaker featuring smooth, powerful reproduction down into the sub-audible frequencies. Its rigid construction and high efficiency design permit the reproduction of even the loudest low frequency transients without ringing or distortion. Response 25 to 7000 cps. Alcomax magnet with flux density of 13,000 lines and total flux of 89,500 maxwells assures the utmost linearity at full power 30 watts of program material. Voice coil diameter 1%" SK-101 SK-101 157 Lafaurate Goodman

SK-101—15" Lafayette-Goodmans Woofer Net 28.50

### LAFAYETTE-GOODMANS 12" WOOFER

A highly-efficient low-frequency transducer for faithful reproduction of the lowest audible frequencies without tone coloration or distortion. Incorporates high flux Alcomax magnets for smooth response and good power sensitivity. Frequency response is 307,000 cps. with recommended crossover at 700 to 1000 cps. Total flux is 89,500 maxwells; voice coil diameter is 134", Rated at 30 watts power handling capacity for integrated program material in a multiple speaker system with an LC crossover network. Voice coil impedance 16 ohms. Size 1234" diam. x 6" deep. Shpg. wt., 9 lbs.

SK-102 12" Lafayette Goodmans Woofer Net 23.50

### LAFAYETTE- 8 1/2" MIDRANGE SPEAKER

A sweet-sounding high-fidelity eproducer capable of doing full justice to the most important range of musical reproduction — the mid-frequency range from 500 to 5,000 cps. Incorporates high-efficiency floward fold half-way down for smooth sound reproduction free from peaks and distortion; plus a completely sealed rear housing to prevent back radiation and interaction with other speakers. Response is 500 to 8,000 cps. Recommended crossovers are 700-1000 cps at the 500 cys. Recommended crossovers are 700-1000 cps at the high end in a 3-way system. Magnet total flux is 32,900 maxwells, Voice coil diameter is 1". Power rating is 30 watts program material in a 3-way system, Voice coil is 16 ohms. Size is 83%" diam. x 33%" deep. Spg. Wt., 4 lbs.

SK-103 8½" Lafayette Goodmans Midrange Net 5.95 LAFAYETTE-GOODMANS

### high frequency DRIVER and HORN

A highly efficient compression-type wide-angle radiator for the highe audio frequencies. With high flux Alcomax magnets. Rigid plastic horn with circular mouth and special design acoustic chamber with phasing plug achieves smooth wide-angle distribution to extremel high frequencies. Horn diameter 2½-" mouth opening 1½-" diam high frequencies. Horn diameter 2½-" mouth opening 1½-" diam 16,000 cps; 8 db down at 20,000 cps; Magnet flux is 25,400 max wells. Voice coil diameter is 1." Recommended crossover is 5,00 cps. Power rating is 30 watts program material in a 3-way system Voice coil is 16 ohms. Shpg. wt., 3 lbs.



Famous -WAY SYSTEM

IN CABINET

with 15" WOOFER...8" MID-RANGE SPEAKER ... HORN TWEETER ... **CROSSOVER NETWORK** 



• 15-INCH WOOFER WITH 31.5 OZ. MAGNET (SK-67)
• 8-INCH MID-RANGE SPEAKER (SK-74)
• 3-WAY CROSSOVER NETWORK (LN-3)

Lafayette presents this outstanding 3-way speaker system designed for the high fidelity enthusiast who desires performance formerly possible in multi-speaker systems costing many times this price. You won't believe your ears when you hear the superb reproduction throughout the entire audio spectrum. The SK-67 15" woofer provides phenomenal bass response, the SK-74 8" speaker delivers full bodied, mid-range frequencies, and the HW-7 high frequency acoustical lens tweeter faithfully reproduces the highest audible frequencies. Crossover points at 350 and 5000 cycles are provided by the LN-5 3-way inductance-capacitance network with continuously variable presence and brilliance controls that adjust tone balance to personal taste. Shgg. wt., 25 lbs.

SY-93—Complete System as listed above.

Net 55.50 EXPLODED VIEW SHOWS

### HIGH FREQUENCY TWEETER WITH ACOUSTIC LENS DIRECT IMPORTATION MAKES THIS PRICE POSSIBLE!

FREQUENCY RESPONSE FROM 2000 CPS TO BEYOND AUDIBILITY LOUVERED ACOUSTIC LENS FOR UNIFORM SOUND DISPERSION HANDLES 25 WATTS OF POWER PRICED EXCEPTIONALLY LOW





PRICED EXCEPTIONALLY LOW

New high frequency tweeter featuring a louvered acoustic lens for uniform sound dispersion and capable of handling up to 25 waits of distortion-free power. The directional tendency of high frequency nates is avercame by the natural wide dispersion angle of the short harn and the acoustic lens which disperses and radiates the high nates smoothly throughout the entire listening area. The lens is detachable for panel mounting, with a separate base for the tweeter furnished for external mounting where desired. Aluminum vaice call has 16 ahms impedance. Size: 4½" lang x 3" diameter, lens extends 2½". Requires or crossover network, preferably one with a level control, such as the LN-2. With full instructions. Shpg. wt., 5 lbs.

### FAMOUS LAFAYETTE HK-3 **METAL-CASED**



**CONE TYPE** HI-FI TWEETER

**OUTPERFORMS TWEETERS** COSTING MANY TIMES THE PRICE

REQUENCY RESPONSE 2000 -14,000 CPS HANDLES 20 WATTS OF POWER

### **NEW! METAL CASED TWEETER** SPECIAL PRICE



FREQUENCY RESPONSE 3,000-16,000 CPS
HANDLES 20 WATTS OF POWER

CHOICE OF 8 OR 16 OHM IMPEDANCE

LAFAYETTE 2-WAY CROSSOVER NETWORK



A carefully designed capacitive inductive 2-way crossover network with crossover frequency easily set to either 2500 or 5000 ocycles. Has a built-in continuously variable high-frequency "Brilliance" level control to match room acaustics perfectly. Control has a 2½ ft. cable to mount on rear or side octive brushed-gold finish escutcheon plate. For use with 8-16 speakers. Easily occessible screw terminals. Metal case 5½" 2½" H x 2½" D. Camplete with simplified instructions, Shaps. 5 lbs.

LN-28 2-Way Crassover Network With Control......Net 8.75

### NEW! 2- and 3-way L/C CROSSOVER NETWORK



LN-S Lafayette L/C Crossover ...

## LAIFAITENTUDE LOW

### LAFAYETTE SPECIAL VALUES IN T PADS, FADERS AND SPEAKER SWITCHES.



Speaker Selector Switch (B). Selects 3 speakers in any combination, with up to 60 watts of audio power. A constant impedance device. On gold finished steel electric outlet plate., 2½ x 4½".

MS-458 Shpg. wt., 1 lb. Net 1.39

Remote Speaker Fader (G). Same as VC-53 except for wall mounting. Shpg. wt., 6 oz.

VC-54 Net 1.55
T Pads (D). Constant impedance control to adjust speaker volume. With brass satin plate for wall mounting. With all parts and instructions. Shpg. wt., 10 oz.
VC-51 8 ohm T Pad Net 3.85

NEW LAFAYETTE L PADS

SPECIAL I LAFAYETTE PK-168

1.25

2.50

RONETTE TO-284-0V--TO-222

REPLACEMENT




New L pads for use as "brilliance" controls to vary tweeter level, or as "presence" controls to vary mid-range speaker level. Both|wirewound elements are concentrically mounted within one plastic housing. With gold-finished metal escutcheon plate, mtg screws, and attractive black knob. Size: 1.9/16" dia., %" deep (less shaft), 2½" deep overall. Shpg. wt., 6 oz.

VC-49—L pad for 8 ohm circuits

Net 1.49 Net 1.49

VC-50-L pad for 16 ohm circuits

LAFAYETTE COMPLETE CABLE ASSEMBLIES FOR HI-FI AND P. A.



90° PHONE PLUG (A) TO VARIOUS CONNECTIONS, Std. ¼" sleeve; completely shielded, All cables shielded except " unshielded parallel

COD.C.				
Stack No.	One Termination	Cable Length	Other Termination	Net
MS-545 MS-546 MS-547 MS-548 MS-549 MS-550 MS-551* MS-552*	90° phone plug (A) 90° phone plug (A)	72 in. 72 in. 72 in. 72 in. 72 in. 72 in. 72 in. 72 in. 72 in.	Straight RCA phono plug (B) Straight RCA phono jack (D) Straight barrel phone jack (C) Mike connector (F) Mike connector (F) 90° RCA phono plug (E) Stripped and tinned ends (J) Alligator clips (II)	.72 .85 .93 .93 1.26 .72 .51

PHONE PLUG (G) TO VARIOUS CONNECTIONS. Std. 14" diam. sleeve;

com	pletely shielded. All c	ables shielded		
Stack No.	One Termination	Cable Length	Other Termination	Net
MS-485 M5-553	Straight phone plug (G) Straight phone plug (G) Straight phone plug (G) Straight phone plug (G)	72 in. 72 in.	RCA-type phono jack (D) Barrel-type phone jack (C) Mike connector (F) Mike connector (F)	.79 ,79 .93 1.26

RCA TYPE PHONO PLUG (B) TO VARIOUS CONNECTIONS. All cables shielded except \* unshielded parallel cable.

Stock Na.	One Termination	CableLength	Other Termination	Net
MS-486 MS-48D MS-481 MS-487 MS-483 MS-484 MS-555	Straight RCA phono plug (B Straight RCA phono plug (B	60 in 72 in. 48 in. 60 in. 72 in.	Straight RCA phono plug (B) Straight RCA phono plug (B) Straight phono plug (G) RCA-type phono jack (D) RCA-type phono jack (D) Borrel-type phono jack (C) Mike connector (F)	.47 .69 .54 .59 .69
MS-556*	Straight RCA phono plug (B	) 120 in.	Alligator clips (1)	.81

90° RCA PHONO PLUG (E) TO VARIOUS CONNECTIONS. All cables shielded

except	unshielded paranel	Cable.		
Stock No.	One Termination	Cable Length	Other Termination	Net
MS-557 MS-558 MS-559* MS-560*	90 RCA phono plug (E) 90 RCA phono plug (E)	72 in 72 in. 36 in. 72 in.	8 orrel-type phone jock (C) Mike connector (F) Stripped and tinned ends (J) Alligator clips (I)	.72 .88 .32 .63

STOCK NO.

SPECIAL 10 FT. JUMPER CABLE. Unshielded parallel cable, 10 ft. long, with alligator clips (1) at both ends.

MS-561

REPLACEMENT CARTRIDGES

FOR RCA 74067

Replacement for cartridges in many thousands of RCA45 and many LP record changers.

1 MIL SAPPHIRE STYLUS 2.3V OUTPUT HIGH IMPEDANCE CRYSTAL TAKES 7-10 GMS PRESSURE 5/6" MTG CENTERS

Net 1.25 PK-148

P5-555-Sapphire replacement stylus for PK-168..... Net .99

GOLDRING "500" MAGNETIC TURNOVER CARTRIDGE
Entirely unique, and exclusive among the 500's features is the "push-pull" cail arrangement which autamatically cancels out inductive hum picked up fram the radiation of changer maters, etc. This permits users of the "500" to realize the full potential af the variable reluctance principle. The "500" will fit any tone arm having standard 1/2" mounting hales to replace any cartridge without alteration at playing equipment.

PK-137-GOLDRING "500" contrides with

otion of playing equipment.
PK-137—GOLDRING "500" cartridge with
2 sapphire styli

SONOTONE 2T-S (Supersedes 9980-S)

Turnover Ceramic Cartridge

This cartridge is used to replace Astotic AC, ACD, CAC, GC, LOD, ELECTRO-VOICE 16TT, 33, 43, 46T 96T; SHURE WC series from WC22 to WC36, W22, W26; WEBSTER ELECTRIC AX, Al, A9-1. It is to be used an VM, Columbio 360, Webster, Crescent record changers and many ather types now in use. Will give such hi-fi characteristics as extended frequency range and obsence of distartian for beyond most cartridges it replaces — all with the added advantages of ceramic safety from humidity and heat. Has 1 mil stylus for LP records and 3 mil for standard — both sapphires. 

HI-FI TURNOVER CARTRIDGE

40-14,000 CYCLES (PK-79)

Never before has a turnover cartridge of this quality been offered at such a price. Frequency response fram 40-14,000 cycles ± 2 dbf Has 2 sapphire styli to play all speeds and types of recards. Needle pressure required is only 5 grams on LP and 12-15 grams an 78 RPM. Output is .5 volts. Comes complete with turnover mechanism and knab. Fits Webster, Garrard, VM, Collara and tone arms af ather leading manufacturers of record changers and players. This is one of the autstanding Lafayette values.

PK-79—Singly, each \$2.75......in lats of 3, each 2.50 PK-79-Singly, each \$2,75.....in lats of 3, each 2.50

PHONO CARTRIDGES
3.5 VOLT OUTPUT (PK 11)

Guaranteed high quality exact duplicates far direct replacement of all standard cortridges such as L70, L82, L92, W608, N10, and many others. Pin plug cannectors

3 VOLT TURNOVER CARTRIDGES

High Output: 3 volts Turnover Mechanism

Net .60

Dual Sapphire Styli

PK-87—Sapphire STD (78) Replacement Needle....

#### RONETTE HI-FI CARTRIDGES IMPORTED FROM HOLLAND

Lafayette brings you this famous high fidelity cartridge for use in Callara, Webster, Garrard and VM changers. Turnover type equipped with 2 sapphire styli to play all speeds. Frequency response to 9,000 cycles, autput .7 valt. Camplete with turnover mechanism and knob; will fit most tone arms of record chanaers and players.

...ea. 2.95

HIGH OUTPUT MODEL

Has less than 1% intermodulation distortion plus high autput of 2.2 Valts. Camplete turnover with 2 sapphire styli. Papular type maunting.

PK-82 (TO-222)—In lots of 3, each 2.75; singly 2.95

TX-88 HI-FI MODEL

TX-85 MI-FI MODEL

This new wide range high fidelity crystal turnover cartridge has a frequency response flot from 30-24,000 cps.

Output is 0.4 volts, which makes it useable without a preamp. It gives straight line response from new arthour coords and so requires no equalization. Extremely high campliance stylus assembly just snops into place. Complete with dual styli. Shap, wt., 6 ox.

POMETTE TX-88 RONETTE TX-88 ...

TX-88 GOLDRING "500" SONOTONE 2T-S 7.35 PK-137 3.75



EXCELLENT FREQUENCY RESPONSE

HIGH OUTPUT . LOW TRACKING FORCE

■ MIGH OUTPUT ■ LOW TRACKING FORCE
■ DUAL SAPPHIRE STYLI
Another instance or Lafayette special value far you: a stereo crystal turnover cartridge at such a low price. Frequency response 40-14,000 cps. Tracks with low stylus pressure and high output voltage. Excellent channel separations for stereo effect. Supplied with turnaver machanism, knob and dual sapphire styli to play records of all speeds. Completely campatible. Fits all standard orms. Shpg., wt., 6 az.

REPLACEMENT STYLE

PK-281—Sapphire Stereo LP PK-282—Sapphire STD (78) PS-86—DIAMOND Stereo LP

### **NEW! 4-SPEED HI-FI** TURNOVER PICKUP



ARM TAKES STEREO OR MONAURAL CAR TRIDGES WITH WIDE RANGE MONAURAL
CARTRIDGE ADJUSTABLE ARM HEIGHT AND

CARTRIDGE ADJUSTABLE ARM MEIGHT AND STYLUS PRESSURE
Arm is wired for stereo, anticipating future conversion. Has a wide range turnover manaural crystal cartridge with dual sapphire styli. Output is 1½ V. Easy height adjustment at base, 1½" to 1.9/16". Also stylus pressure adjustment. Plastic arm 9½" long averall. Base 1½" w. with mounting hales on 1½" centers. Shielded leads. Satin smooth light moroon finish. Shpg. wt., 2 lbs.

Net 2.75

PK-232 Pickup arm only less cartridge PK-158 Sapphire LP replacement Needle Net .69 PK-159 Sapphire STD replacement Needle

LAFAYETTE SPECIAL!



TURNOVER CARTRIDGE

DUAL SAPPHIRE CARTRIDGE PLAYS STEREO,
MONAURAL LP, 78's

Here is a combination of a famous make crystal stereo contridge and stereo
wired arm all ready for use—at an amazingly lawprice for a new stereo item.
Campletely campatible, this unit will play either stereo or manaural records
(78's, too). Output is ,4 valt per channel, response 30-14,000 cps. Min. Stylus
pressure 6.8 grams. Styli are dual sapphire type, .7 mil and 2.5 mil,
individually realoceable.

PK-290 Stereo Tone arm with Turnover Stereo Cartridge....Net 6.95

### RONETTE MODEL-OV CRYSTAL TURNOVER STEREO CARTRIDGE

CRYSTAL IUNNUVER SILVED nather fabulous item for music lavers from Lafayette. Ve now bring you this outstanding cartridge so that you an enjoy the breathroking realism of the latest sterea lists. Campletely compatible, this cartridge plays either erea or manaural records. Cansists of 2 crystals to provide a 4 volt output per channel. Wide frequency response f 30 to 14000 cps. Vertical and lateral campliance of .5 x 10 4 cm. dyne. Crosstalk, .24db. Supplied with straver dual sapphire styli for micrograave records and 8 rpm records. Fits all standard tone arms. Shap, wt., rpm records, riis c... SPECIALI NET 4.45



#### 4 SPEED PHONO MOTOR WITH TURNTABLE

Quiet, dependable A-C operation assured by subber shock-mounted friction drive motor. Speed change control through idler driving an 8" turntable. Mounting centers 4½ x 3½"; 2½" depth below base plate. Shpg. wt., 3½ lbs.

ML-24 Phono and turntable PK-149 Mounting board for mater

Net 5.50 Net 95c



WIRELESS BROADCASTER

through any radio any where in the house without connecting wires. Talk through your radio by microphone.



Lofayette's new wireless broadcaster will extend your enjayment of your to every roam that has a radio. Connect phano to wireless broadcaster radio to the wireless broadcaster, which broadcasts on an adjustable frequency of the proof of the wireless broadcasts. Will take crystal or magnetic cartric microahnens for voice broadcast. Hos volume control with "an-off" switc 5½ x 1½". Completely wired and assembled with all tubes and operations. 110V AC/DC operation. Shpg. wt., 4 lbs.

LA-14 Wireless broadcaster
PA-24 Crystol microphone

### BOGEN 33 WATT P. A. SYSTEM

104.50



This compact 33 wott P.A. System complete with sturdy portable corrying cose housing 2 high quality 12" speakers each with 35 ft. cable, microphone, floor stand and desk stand is ideal for use by schools, churches, warehouses, nightclubs—indeed only high quality P.A. application, 117 V, 60 cps. AC. Shop. wt., 58 lbs. System consists of:

1—Bagen CMA 33 Amplifier.

1—Lafayette PA-24 crystal microphone with 5' shielded cable.

1—Lafayette PA-34 microphone desk stand.

1—Atlas MS-10C microphone flaor stand.

2—Heavy duty 12" PA speakers.

1—Lafayette PA-51 portable PA case.

2—35' lengths speaker cable.

PA-180 BOGEN CHA-33 P.A. SYSTEM AS DESCRIBED.



### SPECIAL 12" & 8"P. A. SPEAKERS • 12" FULL 15 WATTS OF POWER • 8" FULL 110 WATTS OF POWER • HEAVY ALNICO S MAGNETS

12" MODEL — Fine quality throughout, these speakers were designed especially for public address work. Will handle 15 watts of power—making them ideal for use singly for medium power systems or in multiples for higher power. Rugged mechanical construction, dust-proofed and rust-resistant, Hove 4.64 oz. Alnico 5 magnet, 8 ahm vaice will show up 5 the

singly for medical mechanical construction, dust-proored amoreust-resistant. Have 4.64 oz. Alnico 5 magnet, 8 ahm voice coil. Shpg. wt., 5 lbs.

Net 4.95
8" MODEL — Ideal for larger scale, lawer power paging systems. Same quality as 12" speaker above, but 8" diameter, rated at 10 watts, with 3.16 oz. Alnico 5 magnet. 8 ahm veice coil. Shpg. wt., 3 lbs.

Net 3.95

.. Net 3.95 12" MODEL - 4.95

8" MODEL - 3.95

### POWER MEGAPHONE Portable Sound Broadcaster

IDEAL FOR OUTDOOR HAMFESTS

Uses & Flashlight Cells • Completely Self-Contained Weighs only 6½ lbs. with Batteries • High Efficiency Horn Projects Sound 1000 Ft. • Shoulder Strap for Portability and Ease of Use • Microphone Detachable On 10-Foot Cord • For Construction, Auctions, Carnivals, Fire & Police Use • Also Ideal for Marine, Railroad, Civil Defense, Sporting Events

A power megaphone with many unusual features and many applications. Basically a highly efficient sound projector harn with a built-in microphane, capable of amplifying and projecting the voice with a range of 1000 feet. The microphane is a telephone-type element, easily replaceable, and may be detached and extended up to 10 feet from the horn. The reflex-type harn is extremely light-weight, rubber-rimmed, of strong, sturdy soun aluminum construction with 2½ air column and is supplied with a strap for carrying or placing an the shoulder. A press-to-talk switch on the microphone provides for economy of power use—power is used only when actually talking. No warm-up time required—amplification is instantaneous. A patented non-linear current limiting device restricts current flow to safe levels for longest battery life. Uses 8 size "D" floshlight cells in series with an approximate life of about 10 hrs. of use. Battery housing serves as base for entire assembly. Battery compartment opens easily by means of 2 thumbscrews for battery replacement, Size 17" lang averall; harn mouth is 12" diam. Shpg. wt., 8 lbs. less batteries.

BATTERIES FOR ABOVE-Burgess No. 2 or RCA







Self-Contained Only 41/2 lbs. THROWS VOICE DETACHABLE MIKE







REFLEX TRUMPET DUAL WIDE ANGLE



PAGING SPEAKER 90° DISPERSION

The high power handling capacity combined with maximum intigibility make this a superior unit for paging and talk-back app cations. Frequency Response 250-15,000 cps. Power capacity watts. Impedance 8-ohms,90° Dispersion. Equipped with a unit sol mounting brocket, weather proofed, tropicalized with herms cally sealed driver unit, 9% diam. x 8-13/16" deep the speak

lends itself to use in any P.A. situation.
PA-55 90° DISPERSION PAGING SPEAKER.

CHA 620Y





### **BOGEN 20 WATT** MOBILE P. A. SYSTEM

Completely portable in every respect, the versatility of this system allows its use from any car or truck, making the system ideal for sound truck application. System consists of:

1—Bogen CHA 620Y 20 watt; 6-12-117 volt amplifier with 3 speed phono top. 2—Electrovoice 844 speakers, with built in


30 watt driver units

1—Lafayette PA-24 crystal microphane with
5' shielded cable.

1—Lafayette PA-34 microphone desk stand. 2—35' lengths speaker cable. Shpg. wt., of complete system 75 lbs.



PA-181 BOGEN MOBILE 20 WATT P.A. SYSTEM



Net 149.95

LAFAYETTE MODEL PA-62

### 25 WATT DRIVER **EXCELLENT** FOR

### ABOVE TRUMPET

MODERN

**SPEAKER** 

BAFFLES

	SINGLY	LOTS OF 3
DESCRIPTION	EACH	EACH
For 5" or 6"	2.40	2.25
For 8"	2.75	2.55
For 10" or 12"	4.40	4.20
	DESCRIPTION For 5" or 6" For 8" For 10" or 12"	DESCRIPTION         EACH           For 5" or 6"         2.40           For 8"         2.75

### ALL LAFAYETTE AMPLIFIERS ARE GUARANTEED FOR ONE FULL YEAR

### LAFAYETTE MODEL PA-60 10-WATT P.A. AMPLIFIER



24.95

ONLY 5. 00 Down

FEATURES: Provides extensive coverage—up to 20,000 square feet when used with trumpet speakers. For stare demonstrations, clubs, churches, offices, classrooms, auction soles, entertainment. Incarparates latest circuit features for improved performance. Separate valume controls permit mixing microphane and phono. 2 speaker output sockets. Cobinet is finished in baked hammerloid enamel.

SPECIFICATIONS: TUBES: 12AX7, 6L6GB; 6XSGT (Rectifier). PEAK POWER: 12 Watts. INPUT GAIN: Microphane 105 db 2.2 Mag., Phono 65 db 1/4 Mag.

Microphone 103 db 2.2 Meg., Phone 65 db 1/4 Meg. FREQUENCY RESPONSE: 70 to 10,000 cps ± 2 db. TONE CONTROL ATTENUATION: Treble 15 db of 10,000 cps. CONTROL5: 4; mike Pewer Phone or Radia, Tone. INPUTS: 2: 1-Microphone and 1-Phone or OUTPUT IMPEDANCES: 4, 8, 16 ohms and 70 volts (500 ohms). HUM AND NOISE: 60 db below maximum output. POWER CONSUMPTION: 70 Worts, 110/120 V.A.C. 60 cps. SIZE: 101/2" w x 51/3" d x 6" h. SHIPPING WEIGHT: 121/3 tbs.

6" h. SHIPPING WEIGHT.
LAFAYETTE MODEL PA-60—Complete with
Net 24.95

30-WATT P.A. AMPLIFIER . 00000.

PA-62 49.50

D PA-34

ONLY 5.00 DOWN - 5.00 MONTHLY

FEATURES: Ideal for use in churches, schools, small theoters, lecture halls and industrial plants. Priced extremely low to give extra profits to rentals and sales. Separate bass and treble tone controls, permits adjustments to meet all acoustic requirements. Two mike inputs; aptional 4-speed phano top. 70 volt constant voltage output top. Provides coverage up to 100,000 square feet when used with trumpet type speakers. Chassis is equipped with 2-speaker plug-in output sockets. Unit is housed in sturdy steel, well-ventilated tobinet. Modern streamlined styling. Finished in baked hammerlaid ename!, Removable escutcheon plate for rack and panel mounting.

SPECIFICATIONS: TUBES: 3-12AX7, 2-616GB.
SY3GT (Rectifier). POWER OUTPUT: 30 Worts. INPUT GAIN: Microphone 125 db 3.3 Meg., Phono 82 db
1/2 Meg. FREQUENCY RESPONSE: 30 to 15,000 cps.
2 db. TONE CONTROLS: Bass ± 15 db ot 50
cps; Treble ± 15 db ot 10,000 MUM LEVEL: 70
db below roted output. INPUTS: 3; 2-Microphone and
1-Phono. CONTROLS: 6; Microphone 2,
on-off, Bass, Treble, Phono. OUTPUT IMPEDANCES:
4 8, 16, and 250 ohms: 70 volts. POWER
CONSUMPTION: 135 Worts, 110/120 V.A.C. 50-60
cycles. SIZE: 14" w x 8" d x 6" h. SNIPPING
WEIGHT: 20 lbs.
LAFAYETTE MODEL PA-A2

WEIGHT: 20 lbs.
LAFAYETTE MODEL PA-62—Complete with Net 49.50

#### 4-SPEED PHONO TOP

### 10-WATT FIXED P.A. SYSTEMS COMPLETE PERMANENT SYSTEM CHOICE OF CRYSTAL OR DYNAMIC MIKE AMPLIFIER HAS LAFAYETTE'S MONEY-BACK GUARANTEE

• AMPLIFIER HAS LAFAYETTE'S MONEY-BACK GUARANTEE

High quality, law cast system engineered for smaller permanent installations. For areas up to 5500 sq. ft. For office, store, garge, small factory paging and music systems. THE COMPLETE SYSTEMS INCLUDE: The new Lafayette Model PA-60

10-watt amplifier complete; your chaice of either the Electro-Voice 727 crystal microphone complete with detochable desk stand and 5' coble — or the new Lafayette Model PA-29 weatherproof, blost-proof slim dynamic mike complete with high or low impedance selector switch and detachable swivel-type stand adaptor; 8" heavy duty PM speaker; 35" speaker coble and plug; and attractive polished walnut speaker wall baffle. For 110-120 volts, 60 cps AC aperation. Shag. wt., 25 lbs. (Any other microphone may be substituted in all systems of additional costs. See microphones in index).

wt., 25 lbs. (Any other microphone may be stated as described with E-V cost. See microphones in index).

LAFAYETTE PA-14D Complete 10-watt Permanent System as described with E-V 727 Crystal Microphone

LAFAYETE PA-141 Some as above, with Lafayette PA-29 dual impedance dynamic microphone

Net 37.50

### DUAL-SPEAKER 30-WATT PORTABLE SYSTEMS



ATLAS MS-SOC FLOOR STAND








105.00 MICROPHONES ONLY 10.50 DOWN

CHOICE OF DELUXE DYNAMIC MIKES

• TWO GE 25-WATT SPEAKERS • MONEY-BACK GUARANTEE

PA-29



### MICROPHONES Fine Quality Save from 50% to 75% !!!

HIGH QUALITY TOP NOTCH CRYSTAL MICROPHONE COMPARE IT WITH ANY

MIKE AT 2 TO 3 TIMES THE 3.95 each singly, ea.

in lots of 3

Latavette makes history with a high quality CRYSTAL MICROPMONE et e price that is sty, less than any comparable Crystal Microphone on the market redey. Excellent for PA systems, home recorders and general excellent for the property of the part of the p



- DUAL CRYSTAL CAR-TRIDGES
- · ALL DIRECTIONAL . FINE QUALITY
- HIGH OUTPUT

NEW!

TOP

QUALITY

CRYSTAL

MIKE

LAFAYETTE

SCOOP!

.....Net 5 75



SLIM CRYSTAL MICROPHONE

A slim crystal microphane for desk top or hand-held use that is uniquely designed for universal application, smortly styled and attractively finished. Changes in temperature and humidity do not affect its efficiency, nor dost increasing the cable length increase noise or change frequency characteristics. Ingenious swivel mounting permits harizontal and vertical rotation for most convenient angle of use. Microphane easily removed from base for holding in hand. Microphane, base, grill and all fittings are chrome finished. Has a wide range smooth frequency response and an amni-directional polar pattern. Built-in tocking type an-off slide switch. Microphane is only 5" long x 1" max. dia. Shpg. wt., 2 lbs.

PA-45—Microphane Complete with Stand.....Net 3.95

HIGH IMPEDANCE - 50,000 OHMS

New dynamic, high autput micraphane with all the features at "miles" casting 3 times Lafoyette's price Output level —55 db. Smooth response fram 60 to 10,000 cycles. Omnidirectional head. External on-off switch. Slips on or off stand adapter in a wink. Standard 1/2" — 27 adapter permits tilting mike for multi-angle use. Satin block and chrome finish. Complete with detachable cable and cannector. 8" long. 11/4" max. dia. topered barrel 7". Shpg. wt., 2 lbs.

NEW "DYNA-SLIM"

MICROPHONE

ON-OFF SWITCH
"QUICK-SLIP" ADAPTER

NEW!

CRYSTAL

SAVE STEPS AND EXTRA PERSONNEL BY LOCALLY CONTROLLING THE VOLUME OF A REMOTE AMPLIFIER

EASILY REPLACEABLE MICROPHONE CARTRIOGE AND VOLUME CONTROL



Easily Attaches to All String Instruments
This low priced, high quality contact microphone is ideal for amplification of single author, which will be a guitars, banjos, mandolins, etlas, ukeleles, etc. Provides rich, natural reproduction of the actual tone with sufficient amplification to be heard in a large halk. The clamp bar on the mike slides directly under the sounding board cutaut to give a secure fit.

Comes equipped with 8 ft, cable for connection to public dedress amplifiers, tope recorders or radios.

Frequency 15/16" W, 5/16" D. Shpg. wt., 12 azs.

A new, attractively styled crystal microphone for all general applications such as public address and home recording—at a history making low pricel Frequency response 30-10,000 cycles. Output level—52 db. Tilting head, altractive plastic case.



LAPEL MICROPHONE

• Full — 55 db. OUTPUT LEVEL! IDEAL GENERAL PURPOSE MIKE

1.95

Ideal general purpose mike. Specially engineered crystal Microphane. Attaches to lopel. Only 1% in diameter. Exceptional frequency response. Output level —55 db. Chrame plated cose and clip for attaching to lopel. Includes 5 ft. af shielded cable.

Net 1.95

### "WRIST WATCH" CRYSTAL MICROPHONE

• SENSITIVE

· HIGH OUTPUT

. PERFECT FOR SECRET PICKUPS

APPEARS & IS WORN EXACTLY LIKE A REAL



HIGH SENSITIVITY—HIGH OUTPUT FOR USE
WITH ANY AMPLIFIER OR TRANSMITTER WITH
CRYSAL MIKE INPUT FOEAL FOR AIRCRAFT,
AMATEUR, INDUSTRIAL COMMUNICATIONS,
AUCTIONS, PITCHMEN, CARNIVALS, SALESMEN
COMPLETE WITH NECKSTRAP—LEAVES HANDS
FREF!



DUAL IMPEDANCE 50,000 AND 250 OHMS

HIGH OUTPUT 50-11,000 CYCLES

USE ON STAND OR AS

HAND MIKE

The latest design in slim type microphones. A high-output dynomic mike of exceptional quality. Has very smooth response from 50-11,000 cy. choice af either high impedance (50,000 ohms) or law impedance (50,000 ohms). Omni-directional siltable head. Size the stantly remavable sb mike can be handheld. Has cat stantly remavable sb mike can be handheld. Has cat stantly remavable sb mike can be accounted with satin-chrome finish and accustically correct case with satin-chrome finish and accustically correct grille head. Ruggedly constructed. Size: 8" long, 11/4" diam. barrel. Shop. wt., 2 lbs.

PA-29 In late of 3, Each

In lats of 3, Each Single, Each 9,95 PA-29 Single, Eoch

NEW DYNAMIC MICROPHONE FOR DESK-TOP, HAND HELD, OR LAVALIER USE



Naive 29.50—NOW! only 6.95
HIGH IMPEDANCE—50,000 OHMS
RESPONSE—40-9,500 cps

• RESPONSE—40-9,500 cps

Beautifully designed and attractively finished high impedance, light weight dynamic micraphane with swivel mount that permits harizontal and vertical ratation for most convenient angle. Micraphane quickly and easily most convenient angle. Micraphane quickly and easily released fram felt-lined base clamp for holding in hand released fram felt-lined base clamp for holding in hand are for clamping to neck band far use os lavalier micraphone. Baked enamel case with chrame finished base, phone. Baked enamel case with chrame finished base, plenty of fandling.

8. Ruggedly constructed to withstand grille and fittings. Ruggedly constructed to withstand fit shelded cable.

19. 4.8 Shipping wt. 2 the

### ASTATIC M-150 RECORDER MIKE

AMAZING PERFORMANCE AT

AN AMAZINGLY LOW PRICE IDEAL REPLACEMENT MIKE FOR TAPE RECORDERS



### HARMONICA CONTACT MICROPHONE

This is a fine quality, sensitive, crystal contact microphone with a high output had been award to be a superior of a phone with a high output had been award to be a superior of a phone with a high output had been award as amplified, the remaining is amplified, the remaining is simple. The microphone bracket slips under the screw on the boss end of the hormonica and the leads consider that the amplifier system. It is sturdily built and measures only 1½° L x ½° W x ½° D. Complete with 7 ft. shielded cable. PA-35.



SPECIAL VALUES!

MIKE STAND

Economical desk stand. Chrome ploted; heavy cost base finished in gray wrinkle. 43/6" diom., 7" h. Felt pad; 3/4" -27 thread; adjustable collar. Shop. wt., 2 lbs.

PA-34

Net 1.29

POPULAR MIKE CONNECTORS



knurl grips, %"-27 thread. MS-467 Female cannector MS-468 Male connector



A sturdily constructed case for amplifier and twa 12" speakers. Made of heavy plywood with reinforced metal corners. Case splits into 2 baffles, each with leather carrying handle. Strong wire mesh grilles covered with aftractive clath. Has 2 haaks in each half far carrying speaker cables and pravisian for mike and mike base. 4 snap lacks. Inside dimensions 201/2 h,15-9/16-w, 14% d. Cavered in dark blue washable leatherette. Shpg. wt., 20 lbs.

PA-51 CASE.

### STUDIO DYNAMIC MICROPHONE



IDEAL FOR HOME, OFFICE OR STUDIO USF

• FREQUENCY RESPONSE-50-11,000 cps.

HIGH IMPEDANCE-50,000 OHMS. HIGH OUTPUT

A revelation in microphone value, this high quality omnidirectional dynamic microphone provides features found in microphanes selling for many times the price. Employing a unique swirl ridged aluminum diaphrogm campletely sealed and gasketed against high humidity and temperature canditians, the PA proves itself ideal for a wide variety of applications, such as tape recording, church, charat traups and theatrical use. The 360° stirruped shaped brocket provides for mounting with any %"-27 thread floor, desk stand or boom maunt. Finished in an attractive guametal grey the microphone is supplied with 4½'s shielded cable. Shpg. wt., I.b.
PA-49 STUDIO DYNAMIC MICROPHONE .....Net 11.95

NEW!

### DUAL IMPEDANCE SLIM DYNAMIC MICROPHONE

- BUGGEDLY CONSTRUCTED
   OH-OFF SWITCH
   600 & 50,000 OHM IMPEDANCES SELECTED BY SIMPLE ROTATION OF PLUG

Beautiful, professional-looking dynamic with solidy-cast, tapered, slim case with satin-chrame finish, Heavy duty stide-type an-off switch. Built-in transformer supplies dual unbalanced impedances—low Z is 600 ohms, high Z is 50,000 Ohms. Swivel mount fits all standard 3½"-27 threaded stands. Blost fitter eliminates unpleasant "pops" with voice use. Omnidirectional when used vertically—cardioid pattern when tilted. Engineering design and finish are of the highest quality, making this microphone excellent for any application. Camplete with 5 ft. plug-in cable. Shpg. wt., 2½ lbs.

Not 11.95

ARGONNE ALL-PURPOSE DYNAMIC MICROPHONE DUAL IMPEDANCE—250 & 50,000 OHMS
 USABLE RESPONSE 50-18,000 CPS FOR HAND-HELD, DESK OR FLOOR STAND USE

IDEAL FOR TAPE RECORDING, PAGING, COMMUNICATIONS

PAGING, COMMUNICATIONS

Here is a flexible dynamic microphone with characteristics suitable for almost any application. 
Ruggedly constructed, with tapered cast-metal budy and removable base for desk use. Maunts ta the base by means of a 360°-swivel adjustable ball joint and fitted with an adapter for standard 3/"-27 floor stand. SPECIFICATIONS: FRE-QUENCY RESPONSE—Practically flat 80-10,000 cps; ± 5 db 70-13,000 cps. OUTPUT—70 db below 1 valt/microbar at 1,000 cps. DUAL IM-PEDANCE: Low (250 ahms), High (50,000 ahms) unbalanced. Size 9" high (with base), 2" diam. 
at head, tapering down to 3/4". Base diam. 4-13/16", 1/4" high. Shop. wt., 6 lbs.


COMPLETE WITH BALL- JOINT DESK STAND

LAFAYETTE'S MICROSCOPES ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN. - SEE PAGE 38

# 20% 33%

## ayette Sensational! STEREO

### GENERAL ELECTRIC VR-22 STEREOPHONIC MAGNETIC VARIABLE RELUCTANCE HIGH FIDELITY CARTRIDGES



- FREQUENCY RESPONSE 20-17,000 cps
- UP TO 30 DB CHAN-**NEL SEPARATION**
- VIRTUALLY **HUM-FREE**
- HIGH COMPLIANCE

MODEL VR-277 with .7 mil diamond stylus. Absolutely the finest of all G.E. cartridges. Combining 

79.95

### GE 28-WATT MATCHED STEREO PHONO SYSTEM



GE MS-2000 28-WATT AMPLIFIER
NEW COLLARO TSC-740 WITH SHIELDED MOTOR 139.95 41.65

6 ... 6 6.6

(Less Base). NEW GE VR-22 (.7 MIL) NEW GE VR-ZZ (./ MILI DIAMOND STEREO CARTRIDGE 2-ELECTRO-VOICE SP12B 12" SPEAKER @ 34.30 .......

HF-589 Camplete stereo system as listed above. Shpg. wt., 59 lbs. Net 219.73

ommended enclosures for HF-system are the CAB 16 Series anotar Enclosure ar

Resonator Enclosure or
Lafayette Eliptoflex Series Bookshelf Enclosure. Set at 2 57.50
(Please specify finish).
MF-590 Same as HF-589, but with
2 Lafayette—SK-125 3-Way Ducted
Port Speaker Systems. Shpg. wt.
64 lbs. Net 249.50
PK-111—Bose cut for Coltaro TC740. Specify mahagan... blande ar
walnut finish. Net 3.95

Regular Catalog Price LAFAYETTE SYSTEM

24.45

You Save 54.92

21.97 Down 14.00 Monthly

### HARMAN-KARDON A220 20-WATT STEREO HI-FI PHONO SYSTEM

H-K A220 20 WATT STEREO AMPLIFIER COLLARO TSC-740 WITH COMPLETELY SHIELDED MOTOR
NEW GE VR-22 I.7 MILI DIAMOND STEREO CARTRIDGE
2- LAFAYETTE SK-124 BOOKSHELF SPEAKER SYSTEMS @ 17.50

BOOKSHELF

24.45 35.00 Regular Catalog Price 181.05

LAFAYETTE SYSTEM PRICE

You Save 41.10

14.00 Down 10.00 Monthly

STEREO PHONO SYSTEM SCOTT 222 STEREO AMPLIFIER ILESS Case)
GARRARD RC-121/II STEREO CHANGER
NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
2 STEPHENS 80 FR 8" SPEAKERS @ 33.50 SPEAKERS @ 33.50 67.00

Regular Catalog Price 273.05 LAFAYETTE 218.45 SYSTEM HF-575 Complete stereo system as listed obave. Shpg. wt., 51 lbs. Net 218.45
HF-576 Same as HF-575 but with 2-Lafayette Famous Free Edge SK-58 12" Coaxiol speakers and 2 Lafayette Eliptatlex Series Bookshelf Enclosure. Shpg. wt., 108 lbs. Net 264.95
PK-111 Wood Base cut for RC-121 specify mahagany, blande or walnut finish. Net 3.95
Scott D Case for Scott 222 Amp. Net 9.95 You Save

SCOTT 24 WATT

### SELECT YOUR OWN CARTRIDGE • You may substitute the Shure M7D, Pickering 371.7D or the new Electra-Voice 31MD7 in any system shawn with the GE VR-22 at na additional cost. The Shure M3D may be substituted at an additional cast of \$24.00

54.60

21.84 14.00 Monthly

### COMPLETE FISHER STEREO PHONO SYSTEM



You Save LAFAYETTE SYSTEM PRICE 115.06 46.02 Down 27.00 Menthly 460.28

MF-572 Same as HF-571, but with 2 SK-114 129.

MF-572 Same as HF-571, but with 2 SK-114 129.

Mes speakers with 6½ Ib. magnets and 2 Lafayette Eliptoflex Series speaker enclosures, (please specify finish) Shpg. wt., 170 lbs. ..Net \$45.54

PK-111 Wood base cut for RC88, specify mo-hogony, blande or walnut finish. .......Net 3.95



### HARMAN-KARDON A-250 50-WATT

HARMAN-KARDON A-250 50-WA
STEREO HI-FI PHONO SYSTEM
H-K A250 STEREO AMPLIFIER (Less Cage)
GLASSER-STEERS GS-77 (Less Base)
NEW GE VR-22 (.7 MIL) DIAMOND STEREO
CARTRIDGE
2 UNIVERSITY 312 SPEAKERS @ 71.54
2-LAFAYETTE ELIPTOFLEX SERIES
BOOKSHELF ENCLOSURES @ 32.50 65.00

Regular Catalog Price 471.76 LAFAYETTE SYSTEM PRICE

377.60 Down

You Save 94.38

CAB-16 Series Resonator Enclosure may be sub-stituted in HF-581 system at no additional cost.

New GE VR-22

(.7 MIL)

DIAMOND STEREO CARTRIDGE

PILOT 240 30-WATT STEREO HI-FI PHONO SYSTEM PILOT 240 30 WATT STEREO AMPLIFIER
GARKARD RC/121/11 CHANGER (Less Base) 129.50 NEW GE VR-22 (.7 MIL) DIAMOND STEREO

CARTRIDGE 2-ELECTRO-VOICE SP12B 12" SPEAKERS@34.50 68.60

You Save Regular Catalog Price 264.20

You Save
52.84
21.13 Down
14.00 Monthly

Regular Catalog Price 2a

Regular Catalog Price 2a

LAFAYETTE SYSTEM PRICE

PRICE

LAFAYETTE SYSTEM PRICE

but with 2-targette Formout

but with 2-targette Formout

Affayette System

PRICE

Date of the system of t

but with 2-Lafayette Famous Free Edge SK-58 12"Coaxiai speakers and 2 Lafayette Eliptoflex Series Backshelf Enclosures. Shgp. wt., 106 bbs. Net 257-50

F-573 Complete stereo system as listed above. Shpg. t., 60 lbs. .....Net 211.36

ure or Lofayette Eliptoflex Series Bookshelf Enclosure, (Please specify finish), Set of 2 57,50 HF-574 Same as HF-573,



GENERAL ELECTRIC DELUXE 40-WATT STEREO PHONO MUSIC SYSTEM

GE MS-4000 40-WATT STEREO AMPLIFIER
GARRARD RC-88 STEREO CHANGER (Less Base)
NEW GE VR-22 (.7 MILIDIAMOND STEREO CARTRIDGE
2-JENSEN TR-10 TRI-ETTE SPEAKER SYSTEMS 9114.50
HF-577 Complete GE Regular Catalog Price

LAFAYETTE SYSTEM PRICE

393.37 You Save 98.34

39.33 Down 24.00 Monthly



### BOGEN 60 WATT STEREO PHONO SYSTEM



BOGEN DB230A STEREO AMPLIFIER (Less Cabinet)

BOGEN DB230A STEREO AMPLIFIER

(Less Cabinet)

GLASSER-STEERS GS-77 STEREO CHANGER

(Less Base)

NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
DIAMOND STEREO CARTRIDGE
2-UNIVERSITY 312 SPEAKERS

HF-585 Complete steree system
MF-585 Complete steree system
MF-585 Complete steree system
As 1333.23

Recommended enclosures for HF385 system are the: CAB 16
Series Resonator Enclosure 7

Series Resonator Enclosure 7

Lafayette Eliptoflex Series BookLafayette Eliptoflex Series BookLafayette Eliptoflex Series BookLafayette Eliptoflex Series Bookshelf Enclosures, with 2-Lafayette SK-114 12"

3. Way speakers with 6½ ib.
magnets and 2 Lafayette Eliptoflex Series Bookshelf Enclosures, Shps. wt., 170 lbs. Net 435.00

[Please specify finish].

Model GSB Waodbase for GS-77
in ebony with stafin bross trim, or unfinished.

Net 9.60

Bogen CEG cabinet with legs for DB230 Net 8.00

Bogen CEG cobinet with legs for DB230 Net 8.00

New GF VR-22

STEREO

### **BOGEN 24-WATT STEREO** PHONO SYSTEM

BOGEN DB212 24 WATT STEREO AMPLIFIER (Less Cabinet)
GARRARD RC121/II STEREO CHANGER (Less Base)
NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE
2-UNIVERSITY UXC 122 @ 34.79

W GE VR-22

69.58 Regular Catalog Price -365.63

119.95

LAFAYETTE SYSTEM PRICE

You Save 51.12

20.45 Down 14.00 Monthly

HF-568 Complete Bogen system os listed abave. Shpg. wt., 61 lbs. Net 204.51 HF-569 Same as HF-568 but with 2-Lafoyette SK-58 12" Coaxial speakers and 2-CAB-16 Series Resonator Enclosures. Shpg. wt., 137 lbs. Net 244.50 HF-570 Same as HF-568 but with 2-Lafoyette SK-58 12" Coaxial speakers and 2-Lafoyette Eliptoflex Series Bookshelf Enclosures. Shpg. wt., 121 lbs. Net 249.50 PK-111 Wood Bose cut for RC-

closures. Shpg. wt., 121 lbs.
Net 249.50
PK-111 Wood Base cut for RC121.specify finish in mohogany,
blonde or walnut. Shpg. wt.,
Slbs. Net 3.95

Bogen BEG cabinet with legs for DB212 Net 7.50

LAFAYETTE CAB-16 SERIES RESONATOR ENCLOSURES

• SELECT YOUR OWN CARTRIDGE • You may substitute the Shure M7D, Pickering 371.7D or the new Electro-Vaice 31MD7 in any system shown with the GE VR-22 at no additional cost. The Shure M3D may be substituted at an additional cast of \$24.00

59.50

### PILOT SM-245A 40 WATT STEREO HI-FI PHONO SYSTEM



PILOT SM-245A 40 WATT STEREO AMPLIFIER GLASSER-STEERS GS-77 STEREO CHANGER (Less Bose)
NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE

DIAMOND STEREO CARTRI
2-ELECTRO VOICE 12TRXB
12" SPEAKERS @ 61.68
HF-579 Complete stereo system
as listed above. Shpg. wt., 71
lbs. Net 330.35
Recommended enclosures for HF579 system are the CAB-16 Series
Resonotor Enclosure.
Lofayette Eliptoflex Series Bookshelf Enclosure. Set of 2 57.50
[Please specify finish].
HF-580 Some as HF-579 but with

Please specify finish].

HF-580 Some os HF-579 but with 2-Lafayetle Famaus Free Edge SK-58 12" Coaxiel speakers and 2 Lafayetle Eliptaflax Series Bookshelf Enclosures. Shap wt. 113 lbs.

Med GS8 Woodbase for GS-77 in ebony with satin bross trim, or unfinished.

Net 9.60

DJU.J.

JOU.J.

33.03 Down 14.00 Monthly

129.36 Regular Catalog Price A12.8T

59.50

LAFAYETTE SYSTEM PRICE



(Less Base)
NEW GE VR-22 (.7 MIU DIAMOND STEREO
CARTRIDGE

24.45
2-UNIVERSITY 312 12" TRIAXIAL
SPEAKERS @ 71.54 143.08
Regular Catalog Price 424.98
LAFAYETTE SYSTEM PRICE 24.45

341.60 34.16 Down

You Save 85.38 Monthly 

Scott C cage far Scott 299 Amplifier .....Net 9.95



### COMPLETE HARMAN-KARDON

21.00 You Save 93.84

HF-584 Same as HF-583, but with 2-Lafayette SK-112 12"3-Way speckers with 3½ 1b. magnets and 2 Lafayette Eliptoflex Series Bookshift Enclosures, Shpg. wt., 103 lbs. ...Net 454-50

AC 30 Capper and Black metal enclasure for MK-7A230 Net 12.95 WW 30 Walnut or FW 30 Fruitwood hard wood enclasure. MK-7A230 Net 29.95 Model GSB Woodbase for GS-77 in ebony with satin brass trim, or unfinished. Net 9.60



2.95

(D)

FT-512 SPINNING REEL

(F) FT-513

DIRECT

(A) SPECAL TUBULAR FIBREGLASS SPINNING ROD

● GENUINE TUBULAR SUPER GLASS ROD ● STANDS ROUGHEST ACTION-NEEDS MINIMUM CARE ● SOLID-COMFORTABLE-NATURAL CORK GRIP ● SINGLE WIRE NON-FOULING GUIDES

A first quality tubular (hollow) fibreglass spinning rad—plenty of power, action and eye appeal. All the features of rods selling far above Lafayette's price. Solid-comfortable-natural cask hondle with anodized aluminum reel retolning rings. Holds reet solidly and securely. Extra large guides with neat, even nylon wrapping. Sealed against moisture. Long, strong extra deep joining ferrule precisely fitted. Guides are hard-ryst resistant—and properly spaced. Braced tip-top guide. Emire rod finished in hard, durable, black lacquer. Papular 2 piece, 5 foot length. Shpg., wt., 1½ lbs.

FT-501 FIBREGLASS SPINNING ROD.

Net 3.29

### (B) TUBULAR FIBREGLASS SPIN-CAST ROD

■ 5½ FT. MEDIUM-LIGHT ACTION ■ POSITIVE LOCK REEL SEAT
Finest 2 piece, hollow fibreglass, medium-light action spin cast rod. Five Inch web, shaped cork grip on a die cast aluminum offset
handle. Positive, threaded ring, locking reel seat. Designed for closed foce spin cast reels! Chrome plated, stainless steel guides and
braced, offset tip-top. Chromed, stainless buttplate. Extra deep, precisely fitted ferrules. Colorful, sealed, nylon wrappings. Fine
action with plenty of back bone. Casts flies, streamers, bugs and poppers. Shpg. wt., 1½ lbs.
FT-503 FIBREGLASS SPIN-CAST ROD.

Net 3.95

(C) TUBULAR FIBREGLASS "7 SEAS" SPINNING ROD

• FOR FRESH AND SALT WATER SPINNING! • ACTUAL WEIGHT ONLY 5 0ZS.1 • COMPARE TO RODS SELLING FOR

All the extra power you need to land the "big ones"—in fresh or solt water. Hollaw glass construction for that "live" action—plus "back-bone" when you need it. 4" cork fore grips 6\%" cork butt with vinyl butt plate. Extra-large, non-fouling, diamond-hard guide. "Snoke" design allows guides to flex with rod. Braced tip top of super-hardened, stainless steel. Fixed reel seat polished brass with chrome retaining callar and lock nut. Glossy black lacquered finish. Colorful, sealed nylon windings.2 piece blade with extra deep ferrules. Overall length 6\% ft. Superbly topered—designed for maximum lure action-trouble free construction. Shpg. wt., 1 lb. FT-502 FIBREGLASS SPINNING ROD.

(D) SPECIAL SPINNING REEL

• GOLD ANODIZED SPOOL • NYLON BEVEL GEAR • ANTI-REVERSE LOCK

A fine, light spinning reel with all the features found in far more expensive reels. Strong-sturdy handsome appearance, Selective anti-reverse lock. Chrome plated pickup arm. Body of non-corroding, ebony finished, aluminum alloy. Housing and spool of gold anodized aluminum for maximum corrosion resistance. Naiseless, smooth running, nylon bevel gear. Handle is removable for storage. Holds 200 yds. of 4 lb. test line. Gear ratio of 3 to 1. Shpg. wt., 1 lb

FT-512 SPINNING REEL

#### (E) PUSH BUTTON SPIN CAST REEL

Closed face—bock lash free—push button action. Push button spring release—assures instantaneous line control the moment the lure hits water. Brass Gears—precision machined to assure long, trouble-free service. Finger-tip Anti-Reverse Lever—for fast action. Spring loaded Geared Drag Adjustment—may be set for any tension. Attractively finished in triple lacquered ebony with gold-anodized spool cover. Chrame plated double handle crank. Incorporates the features and trouble-free performance of the most expensive reels. Complete with 80 yds. of 6 lb.,limp monofilament line and rubber practice plug. Actual weight only 8½ azs. Shpg. wt., 1 lb. FT-516 PUSH BUTTON SPIN CAST REEL.

Net 4.59

### (F) NEW! "SPIN-TACULAR" REEL

### (G) NEW! "7 SEAS" SPIN REEL

ALL THE FEATURES OF THE MOST EXPENSIVE REELS

The "greatest" for surf-casting, trolling, spinning or any salt water Fishing. High pressure moulded of an aluminum-magnesium alloy, surface treated and anti-corrosion coated. Eliminates need for the usual care and cleaning associated with salt water gear. Unique planetary gear system crosswinds line for greater line capacity and the smoothest, longest costs you ever mode! "Back-lash" is a thing at the past. Fully adjustable, positive drag action. Built right into the spool for smooth, constant tension. Full boil pick up of chromed bronze. Line guide of super hard chromium carbide. Torpedo handle, spring loaded, folds back for storage. Positive, finger tip anti-reverse control. All the features normally found in the most expensive reels. Actual weight 19 azs. Shpg. wt., 2 lbs. FT-514 "7 SEAS" SPIN REEL.

(H) "7 SEAS" TROLLING REEL

• FINGERTIP FREE SPOOL CLUTCH • ADJUSTABLE STAR DRAG

Universal salt water real. Pawerful star drag, free spool, fast retrieve. All metal construction of highly corrosion resistant alloys. Aluminum-magnesium alloy spool. 3 inch diameter side plotes—with satin black, triple baked, rust resistant, permanent finish. Conventional free spool lever. Hordened bronze gears. Counter weighted, tarpedo handle. Chrome plated, hand polished frame. Self Jubricating, long lasting bronze bearings. Capacity 250 yds. of 27 lb. line. Actual weight 17 ozs. Shpg. wt., 1½ lbs.

FT-515 "7 SEAS" TROLLING REEL Net 7.95

### SAVE NOW • Special Sports Sets

These matched sets save you even more! Specially selected top quality—latest designs. Combinations selected for ease of handling—include all necessary basic equipment—offer you mare fishing fun and enjoyment at budget prices. Items sold separately cast more—you save by purchasing the complete set. Check these kits for features found only in much higher priced equipment.



Special Spin Set: "Best-Buy" spinning outfit. Especially desirable for beginners-fine enough for the "old-pro." Set includes: Tubular fiberglass 5 ft. spinning rod (FT-501), simple-to-use, light spinning reel (FT-512), 200 yds. 6 6 lb. manofilament line (FT-527), 24 finest, divided wing flies (FT-531), rigid polyethylene tackle box (MC-25). If purchased separately would cost 10.47.

FT-505 Shpg. wt., 4 lbs. ..Net 8.99

"Push Button" Spin Cast Set: An easily handled costing set. Designed to give the fisherman complete control. Most popular outfit—contains all necessary bosic equipment. Set includes: 5½ ft. gloss spin-cost red (FT-503). "Push Button" spin cost reel (FT-516) pre wound with 80 yds. of 6 lb. monofilament tine, practical plug, 12 selected "poppers" (FT-529), and rigid, polyethylene tackle box (MC-25). Shoa. wt. 5 lbs. ....Net 10,29



FT-5 16 PUSH BUTT SPIN CAST REEL

BUTTON



19 "Spin-Tacular" Spinning Set. The finest all 'round spinning gear for the money. Suitable for both fresh and light soft water spinning. Matched components for ease in handling, lang life and extra enjoyment. Set includes: 6½ ft. hollow glass "7 Seas" rod (FT-502), "Spin-Tacular" all-purpose spinning reel (FT-513), 200 yds. 8 lb. monofilament line (FT-528), 24 "New England" Salmon streamers (FT-520), rigged worm lure (FT-525), rigged eel lure (FT-525), and rigid polyethylene tackle box (MC-25). Shpg. wt., 5½ lbs.

FT-507 Net 16.95 NEW!

MINIATURE IMPROVED 8.33 HOIST

SMALL ENOUGH TO FIT YOUR POCKET!
PRE LUBRICATED FOR LIFE!
LIFT 1000 TO 2000 POUNDS!

The only truly minioture hoist available, Indispensable in industrial plants and workshaps. Perfect for huntersbooters-airplane owners-materists. Great strength and tiny size permits hundreds of uses — can be a real life saver in an emergency. Mode of high grade oluminum with steel oxles. Prefubricated for life. Two lifting stings — one on top and one at bottam — with heavy, welded steel rings. Nylan cable supplied tests at 550 lbs. per strand. "Midget" hoist comes with 70 ft. of Nylan cable, hos a 5 to 1 ratio — 1000 lbs. test — and weighs only 13 az . "Tiny" haist has 100 ft. of Nylan cable, a 7 to 1 ratio — 2000 lbs. test — and weighs only 15 az . Does all your lifting safely and easily.

MD-330---"Midget" shpg. wt. 11/2 lbs. ......Net 8.33 MD-331---"Tiny" shpg. wt. 2 lbs. .......Net 10.83

### MAP MEASURER & COMPASS

- Not a gadget—but a real in-
- map.

   Measures curved or irregular shapes.

shapes.

Exclusive at Lafayette! A map measurer with built-in compast! for the motorist — camper — hunter — boating enthusiast. An indispensable unit of equipment, Just trace along route on map and multiply miles—per inch factor by reading on dial. Alto reads directly in inchas up to 39°. Built-in magnetic compass has cardinal and secondary points—full 360° markings in tenths. Accurate and dependable. Complete with leather sheath. Shpg. Wt. 8 oz.

F-47 LIST . . 2.75 ... Net 1.59



Easy To Install — No Extros To Buy
Meets U.S.C.G. Requirements
For All Closs "A" And Closs "1" Boots
Running Light And Stern Light

Running Light And Stern Light

New Burgess Boat-life kit-full of leatures never before offered to small boat owners. Contains every thing noceded to meet U.S. Coost Guard requirements for lights on small boots. New combination boulight with optically perfect Red-Green freshel lens. Projects light over one mile. Correctly shielded-mode of special corrosion-resistant oluminum alloy. New stern light-flog staff has unique plug-in feature. Quick-cosy removal for sofe keeping. No noils, screws or clamps just plugs in. Carrosion-resistant aluminum alloy with lamp visible for 2 miles. Kit includes heavy-duty, 6 valt, sealed-in-steel battery, all necessry hardware, mounting brackets, wire, weather proof switch and instructions. Shap. Wt., 7 lbs.

Burgess BK-100. List 17.95 Net 8.20

### Pocket Generator Flashlight

Pocket Generator Flashlight


NO BATTERIES—EVER! • ALWAYS READY TO OPERATE!

The perfect pocket flashlight for home-car-or to carry with you. Plenty of bright light just by successive activation of generator level. No batteries to corrode or go dead. Balanced flywheel generator for ease of operation. Only 23% x 1" x 112", slips easily into pocket or purse. Never wears out. Ideal for campers—tourists—motorists. Weighs only 6 ozs. Made in Germany

F-169 List 6.49 Shpg. wt. 1 lb. Net 3.79





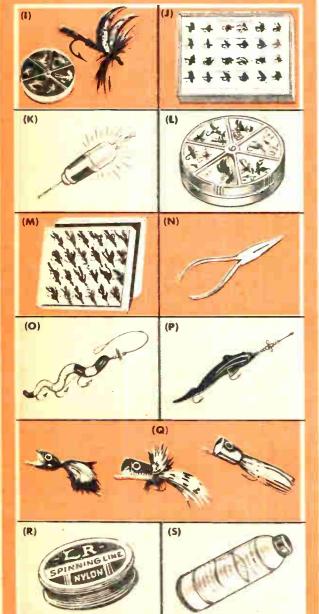

#### (I) "DIAL-A-FLY" ASSORTMENT

(I) "DIAL-A-FLY" ASSORTMENT

One dozen of the most popular flies avoiloble. Expertly tied by skilled craftsmen. Packed in a round, plastic, six compartment container. Selector cover rotates for instant choice. Pocket size-handy-snag proof. Includes such favorites as Royal Coachman, Black Gnot, Silver Doctor, Porma Belle, Yellow Sally and Mosquito all tied on =10 hooks. Shyg. wt., 6 ass.

FT-S30 "DIAL-A-FLY" ASSORTMENT Net .89

(J) 24 ASSORTED WET AND DRY FLIES

24 hand tied-expertly detailed-most popular flies. The perfect kit for the beginner or old pro. All tied on =10 hooks. Includes such famous types as Royal Coachman, Black Gnat Ifemole), Red Ibis, Silver Doctor, Quill Gordon, etc. Each fly is individually identified. Mode with universally accepted fly materiols. WH. 8 az. MD-328 24 ASSORTED WET AND DRY FLIES

Net 1.05

PD-328 24 ASSORTED WET AND DRY FLIES

(K) "BITE-A-LITE" FLOAT

Flashes at a nibble! Wotertight Body! Adjustable Contacts! Doubles your "luck" and fun while night fishing. Excellent on cloudy days, at down or sunset. So sensitive even beginners do well. Flickers of a nibble—lights with a bite. Can be used as a colorful sensitive float even without the battery and light. Self-contained miniature bottery and bub are easily replaced. Long battery life. Mode of corrasion-proof plastic and brass. Weighs less than 1 oz. with bottery. Complete with buble and instructons. Less bottery. Shpg. wt., 4 oz.

HO-344 "BITE-A-LITE" FLOAT

Net .98 2 for 1.69

Net .08

(L) 24 DIVIDED WING FLIES

Finest quality, hand tied dry flies. Skillfully made with just the right amount of natural-tip hockle. Upright divided wings cocked well forward. Decorated silk bodies. Fovorite patterns: Block Gnat, Silver Doctor, Royal Coachman, Yellow Sally, Pormo Belle, Etc. Compore to flies selling as high os .30 each! =10 hook. Shpg. wt., 8 azs.

FT-S31 24 DIVIDED WING FLIES

Net 1.49

(M) 24 ATLANTIC SALMON STREAMERS

Famous "New England" streamer flies. Resemble smoll, five minnows in the water. Beautifully dressed and fitted with jungle feathers tied in at the head. All dressing tight and smooth. Two dozen all time fovorites tied on long shonk No. 2 hook. Includes Black Ghost, Light Tiger. Aunt Ider, Gray Ghost, Parmachene Belle, Jack Scott, etc. No two alike. Regulorly sell as high as .49 ea. all 24 identified on lobeled card. Shpp. wt., 12 ozs.

FT-532 ATLANTIC SALMON STREAMERS

Net 2.39

(N) FISHERMAN'S 8" LONG NOSE PLIERS

• HARDENED TEMEPERED STEEL • KNURLED SURE GRIP HANDLES

A sturdy all purpose 8" Long Nose Plier especially suited for the fisherman, Mode of rust resistant drop forged steel—ideal for use as leader bender, hook remover, wire cutter—literally scores of uses in the fishing boot or workshop.

HD-S1 8" LONG NOSE PLIER

Net .89

MD-51 8" LONG NOSE PLIER

(O) 'NITE-LIFE" WORM LURE

This life like worm lure consists of a 3-gang hook horness with 5½" soft plastic worm tied to horness with 15½ b. test nylon. Fluorescent red beads with revolving nickel propeller blade and red plastic lure combine to make this excellent shallow running lure. Size 4 gold plated hooks. Actual Lure Wt., ½ oz. Shpg. wt., 4 oz.

4 oz. FT-\$26 "NITE-LIFE" WORM LURE

(P) "WIGGLY-EEL" NATURAL LURE

A notural soft black plastic eel tied with 15-lb. test nylon to a 2-gang hook harness. Wire shoft directly attached to eye of front hook with revolving propeller blade located between 2 solid metal beads. Size 2 gold plated hooks. Shpg. wt., 4 oz. W1. 4 oz.
FE-525 "WIGGLY-EEL" NATURAL LURE

(Q) 12 SELECTED FANCY POPPERS

A choice selection of hand painted popping bugs for blue gills, bass, trout, pon fish. All proven fish-getters. 4-cork shaped, scoled body, with hackle and tail feothers. 4-cork shaped, frog type with rubber hula skirt. 4-"open-mouthed" with feother streamer. Hooks won't pull out. All on =10 hooks. Regularly cost over 30 cents each! Shpg. wt. 8 ass.

ET-529 SELECTED FANCY POPPERS

Net 1.29

(R) MONOFILAMENT SPINNING LINE
Limp, DuPont Nylon, "Trigger Fish" monofilament spinning line. Extra strong—quick drying—small diameter. For open or closed foce spinning reels. Choose either 6 lb. or 8 lb. test. 200 yd. lengths. Shpg. wt., 8 ozs.
FT-527—200 yds. 6 lb. Line
Net .69
FT-528—200 yds. 8 lb. Line
Net .79

(5) 400 YDS. NYLON LINE 4 00 yds. per spool—25 lb. test FT.-534

Net 8.29

Net 2.69

Shpg. wt.,

FILTER

## 計 V

5.95

### COMBINATION BAIT-CAST AND **FLY-CAST** FISHING KIT

- Fine Quality Split Bamboo Rod
- Converts from 8 ft. Fly Rod to 5'4" **Casting Rod**

The perfect all-around "Fishermans-Friend." Features a split bamboo rod with interchangeable tips and reversible handle. Chrome plated, screw locking reel seal. Shaped cork handle. Chromed stainless steel guides and extra deep chromed brass ferrules. High gloss lacquered surface-colorful, sealed nylon windings. Kit contains 4 pc. Split bamboo rad, brass swivel, split-shot, line winder, float, nylon line, 12 assorted flies, 2 streamers, 6 hollow point hooks with leaders, leader cutting scissors and fitted wooden case to hold complete kit. Shpg. wt., 3 lbs.

FT-504 Regularly 9.95 Net 5.95



### Beachcomber Tackle Box

Constructed of rigid polyethylene, this rugged box will withstand warping, denting, cracking, breaking and corrosion. Solid brass hoardware and nylon lotch. Handy contilever tray provides for lures and small tackle with ample room in the botton for bait and spincasting teels. Dimensions 12% long x 4% deep x 5% wide. Weighs only 1% lbs.

Shpg. wt., 21 lb.

MC-25 BEACHCOMBER TACKLE BOX
Net 2.05



### **Golf Ranger Finder**

This exciting new Range-finder is bound to prove on invaluable addition to your Golfing Equipment. Featuring a precision 6X lens capable of measuring from 40 to 250 yards, this hondy packet size instrument enables the golfee by means of a simple focusing adjustment to easily compute the distance to the next hote. Guess work is completely eliminated and choosing the correctub is greatly simplified. Supplied with sued teather carrying case and simple instructions. Shop, wt., ½ lb.

F-427 GOLF RANGE FINDER Net 9.95

### HYDRAULIC PUMP OILER

PERFECT OILER FOR 1001 USES

IGHTWEIGHT—HANDY—TRANSLUCENT TENITE

IGHTWEIGHT—HAN

A new shap-home-affice accessory.

Gives fine, pressurized stream that lubricates hard to get at places.

Seomless construction of durable tenite. Finger tip plunger. Holds 4 as. of oil. Lubricates all types of mechinery—hand and power tools—appliances—fixtures—tory—conveyances.

Removable base for easy filling. Drip proof—leak proof design. Outmodes the old fashioned oil can. Shpe. wt., 1/2 tb.

HB-97

### IMMERSION HEATER

Useful in leb-shap-horse

Hi-hool immersion coil brings weter to oboil in minutes. Heots instantly to a full 300 wetts. Highest efficiency in heating liquids of all types. Safe—convenient—entirely sheathed and sealed in nickel-plated brass. Specially shoped tubes provide minimum distance of heat transfer. Excellent for use in narrow contoiners requiring minimum displacement. Nichrome olloy héating element. Many applications in tab, shop and home. Overall length o'/;", immersion length 4", coil dio, 11/a". For 115 V. AC or DC. Shpg. wt., 8 oz.

Net .98 2 for 1.69

### AUTO-BOAT COMPASS

Trucks-Tructors

• Illuminated and



Mounts onywhere on cars-boats-trucks-tractors-motor-cycles. Non-glore, universal mounting bracker. Most easily compensated compass ovailable. Just o twist of the bottom or top knob. Extremely accurate. Constructed to withstand oll desing shocks, Important to the daily driver, Involuoble for boats and tractors. Large viewing window and figures for ease of reading. Includes mounting accessories and instructions. Illuminated model includes beth 6 and 12 vett bulbs. Shop Wt. 1 tb. F-322 Nen-illuminated Net 3.75

F-323 Illuminated Medel

1 lb. HO-332 Multi-Use WRENCH SET



Fully nickel plated—special analysis atlay tool steel. Hea treated and hordened. 16 sizes cover the most often countered nuts in the outomotive-TV-radio-appliance hobby fields. Sizes range from 13/64\* to 7/16\*. Set cludes cose with transparent cover. Shpg. wt., 8 oz. Not. Net 69¢

HEDGE TRIMMER ATTACHMENT

Converts any 1/4" drill into an easy handling hadge-trimmer. Steel and aluminum construction. Sickle-type 10" cutting blode. Simple com action, 3/4" stroke. Eightweight . . . easy handling. Shee, wt., 3 lbs.

BABCO GRASS TRIMMER

Now you can take advantage of that electric drill in your work shop to trim grass with this unit. Attaches to any 1/4" electric drill, ideal for cutting gross grown over sidewalk, stepping stones or close to wall. Neat and fast cutting. Fen times faster than hand shears. The rotary blade is well guarded, top and sides, to insure safe operation. 51/5" blade can be easily re-sharpened with any kitchen keife sharpener. Shpg. wt., 1 lb.

10.300 Net 2.6

"TRIG · A · MATIC" HOSE NOZZLE Automatic Pistol Type • Camplete-Simple One Hand Operation

Latest in garden hose nozzles. Precision built pistol type. Four spray action-automatically locks in position. Adjustment for fine variations. Trigger release button—for instant, one finger shut off. Chrome ploted and highly palished. Stoinless steel springs and neoprene gaskets. Gun sight permits hanging for storage. Shpg. Wt., 1 ib.

Fast Shearing actions
 Safe operation with blade guard
 Smooth, Clean Cutting



### AIR CONDITIONER

FOR ANY ROOM AIR CONDITIONER Made OF B.F. GOODRICH "TEXLITE"

PERMANENT - WASHABLE

1.98 ONLY

99€

• Free flow design increases efficiency. Famous Goodrich "Texlite"—thousands of rubberized bustles — give optimum air flow and maximum filtration. Rigid—needs no frame. Relains shape under pressure—will not floke. Trims to fit ony room air conditioner. Shap, wt., ½ lb.

ML-152 FREE FLOW FILTER Net.99 ea Net ea. in lots of 3 ,75

### TRANSPARENT UTILITY BOXES



storing screws, nuts, bolts and hundreds of other small parts.

With hinged cover and built-in partitions. storing screws, nuts, bolts and

Stock No.	Dimensions	Compart.	Wt.	Each
MS-S1	7" x31/2"x1-3 "16"	5	5 Oz.	.41
	81/4" x41/4" x1 1/4"	6	7 Oz	.53
M5-53	7"x31/2"x1-3/16"	9	5 Oz	.41
MS-54	81/6"x41/4" x1 1/6"		7 Oz.	
MS-55	103/4"x6.4x1 1/4"	18	17 Oz.	11.35
-				



### SWING-UP FLASHER-SPOTLITE' LANTERN

This powerful beam swivel head seorch light features a swing-up handle red blinker light which sets at ony ongle within a 90° ore for safety worning and emergencies. Separate blinker and beom switch operates individually or jointly. Perfect for all outdoor activities, road emergencies, home and farm. Rugged metal case in red ename with lustrous chrome swivel head and handle. Uses 6 volt battery or 8-standard flashlight batteries. Shpg. wt., 3 lbs.

SURGESS 2R or RCA VS036A 1½ Volt Battery.
Shpg. wt., 7 oz. (8 required) .......................Net Each .13



### MARINE COMPASS

• Jeweled

• Brass

• 2° Graduations

3.29

Imported compass for sail or motor boats. Entirely non-magnetic and corrosion resistant. Finely made of glass brass- and lacquered oak. Direct-reading 360° dial. Calibrated every 2°. All cardinal points are oversized. Shorp, black markings on white background, Compass is easily removed from gimbal for safekeeping. May be mounted as a permanent binnocle or used as a portable unit. Overall dimensions are: 4½" x 3½" x 3½" Campass is 74mm-Shag, wt., 1½ lbs.

## BUILD YOUR OWN LAFAYETTE QUALITY KIT

### NEW! LAFAYETTE 45-IN-1 TRANSISTOR EXPERIMENTERS KIT

A TRULY REMARKABLE VALUE Practical-Educational-Entertaining

### EXCITING PROJECTS BUILD ALL OF THESE



- ELECTRONIC TIMER
- EURGLAR ALARM
  2-STAGE AUDIO AMPLIFIER
  PHOTO-ELECTRIC RELAY
  CODE PRACTICE OSCILLATOR

- AUDIO PREAMPLIFIER ELECTRONIC FLASHER TV COMMERCIAL KILLER
- RAIN ALARM SIGNAL INJECTOR

- SIGNAL INJECTION
  INTERCOM
  2-STAGE BROADCAST RECEIVER
  WIRELESS BROADCASTER
  WIRELESS CODE TRANSMITTER
  REGENERATIVE RADIO RECEIVER

AN IDEAL LABORATORY KIT WHICH HELPS TEACH YOU HOW TRANSIS-TORS WORK IN A PRACTICAL WAY.

### ASSEMBLE THE BASIC COMPONENTS THEN WIRE EACH CLEARLY EXPLAINED CIRCUIT BY SIMPLY CONNECTING THE PROPE? LEADS. THE MOST EXTENSIVE TRANSISTOR LAB KIT IDEAL FOR STUDENT - HOBBYIST - EXPERIMENTER

Lafayette's new 15-in-1 transistor experimenters kit is the most practical introduction to the understanding of the operation of transistors — since it utilizes basic transistor principles and circuitry. Its unexcelled simplicity of construction provides a fascinating and educational program of instruction. You build practical, useful operating transistor devices that teach you transistor fundamentals and applications.

This versatile kit is supplied complete with transistors, relay, photosell, dual headphones and all necessary items including lead wire, solder. You also receive an easily understood instruction manual which explains just how each of the 15 circuits works. Battery powered, the kit is shockproof and safe—ideal for beginners. Shpg. wt., 4 lbs.

KT-134A 15-in-1 Transistor Experimenters Kit (Less botterles)......Net 14.95

BATTERIES
Burgess Z ar RCA VS034 (8 required)

### NEW!

### **EXCITING "EXPLOR-AIR"** RECEIVER KIT



• 1.7-5.0 Mc., 5.0-14 Mc., 14-30.Mc. shortwave bands Camplete bandswitching from front ponel

Built-in Big 4" PM Loud-speaker

**4 BAND** 

The most sensational shortwave economy receiver kit ever offered. A complete shortwave and standard broadcast set which covers the entire region from 550 kilocycles to 30 megacycles. Four whole bonds of fascinaling programming unovailable elsewhere. Perfect far students of longuages, radio amaleurs and casual listeners.

Only a regenerative circuit can offer such amazing performance and yet be so simple to build. Building this fine kit is an absolute pleasure — it's so well designed you can't go wrong. Kit includes all the parts you need, and the detailed step-by-step instruction book with its giant pictorial drawings shows you just how to put them together.

One front panel knob does all the bandswitching at the flick of the wrist, immediately taking you from band to band. All coils are prewound for greater accuracy. This kit is so eosy to build a child who can read could do it (and many already havel) The chassis is completely isolated from the circuit, so there is no shock hazard.

This precision radio kit is just full of extra features. Complete 4 band coverage of broadcast stations, international broadcast bands, amoteur, maritime, fire and police services, yes, even satellite signals! Big 4" speaker and sensitive circuit with 50C5 output stage and 12AX7 regenerative detector and amplifier stages give you all the volume you want. Pione iack for privacy automatically disconnects speaker. All controls are on the front panel: On-Off Volume, Main Tuning, Band Spread, Bandswitch, Antenna Tuning, and Regeneration. 110 Volt 50-60 cycle AC-DC power supply lets you use this fine 3st anywhere. Size: 10" x 7" x 5". Everything needed for unexcelled reciption is combined in a compact, economical package.


KT-135" EXPLOR-AIR RECEIVER KIT (Less Cabinet)

KT-335" EXPLOR-AIR RECEIVER KIT (Less Cabinet) ... ML-150 - Leatherette covered Wooden Cabinet for above .... ...Net 2.75

### **NEW!** SUPER-SENSITIVE PHOTOCELL ELECTRONIC RELAY KIT



CAN BE USED AS



WORKS WITH JUST A FLASHLIGHT AT 250 FEET!

• WITH CLAIREX CADMIUM SULPHIDE • NEEDS NO SPECIAL HIGH-INTENSITY

 INSTANTANEOUS OR SUSTAINED OP-**ERATION ON THE FLIP OF A SWITCH!** 

Lafayette's latest achievement in a super-sensitive photocell relay kit. Ideal for sustained operation required for burglor alarms, door buzzers, for turning an parch and home lights at night to discourage prowlers when away in the evening. Excellent for instantaneous an-off operation required for counters, packaging, door opening, motor activation and countless industrial applications. A flip of the switch converts unit from instantaneous "on-off" to sustained "on" operation. A simple push on the "RESET" switch opens the external circuit and turns off the alarm. The unit operates on 110 valis AC and incorporates the efficient 5823 cald cathode tube, permitting langer life since there are no filoments to burn out. The cantrolled circuit is plugged into a convenient 110V AC aurput socket. A simple change in wiring (in instructions), as well as convenient input terminals, enable you to supply the external circuit with any desired voltage. Relay centacts rated at 3 amps permitting up to 300 waits external load on 110 Volts AC. Complete with all parts, photocell, tube, chassis, silk-screened metal cobinet and easy-to-follow illustrated instructions. Size: 3" x 4" x 5". Shpp. wt., 3 lbs. KT-133—Kit, Complete

ALL LAFAYETTE KITS ARE SUPPLIED WITH EASY-TO-FOLLOW INSTRUCTIONS

### AFAYETTE STEREO PHONO AMPLIFIER KIT



- GANGED TONE CONTROLS
  STEREO-MONAURAL SWITCH

- 4 WATTS STEREO OUTPUT
   ISOLATION TRANSFORMER
   SEPARATE VOLUME CONTROLS

.04 VOLT SENSITIVITY

• SEPARATE VOLUME CONTROLS
is a complete 4-watt hi-fi stereo amplifier having 2 watts output per channel. Features separate
lume control for each channel; ganged tone controls; Stereo-monaurol switch to feed one channel to both
eachers and to reverse the channels, Just right for any use where a small stereo amplifier is required—idea
custom mounting in even the tightest locations; specially designed for small apartment sized stereo

for custom mounting in even the lightest locations; specially designed for small apartment sized series systems.

An isolation transformer makes this circuit extra safe. Other circuit features for better performance include application of negative feedback to driver and output stages for wide-range response and extra low distration. Dual-triode 12AX7 tubes function as valtage amplifier and driver, providing very high gain: 40 millivolts drives this unit to full output. This tremendous gain, plus an extremely high input impedance, make this amplifier perform exceptionally well with all types of ceramic and crystal pickups, as well as tuners, tape recorders, etc. Selenium rectifier power supply has extremely good regulation. Logical layout, high quality ports, plus complete instructions for assembly, make this kit a glosause to build and use. For 3.2 or 8 ohm speakers. Tubes: 2-50C5, 2-12AX7 plus selenium rectifier. Size: 9½" x 5" x 4½". Complete with all parts. For 110-120 voits, 60 cycle AC. Shpg. wt., 7 lbs, KT-126-Kit, Complete

### COMPLETE STEREO PHONO SYSTEM KIT



PLAYS STEREO AND MONAURAL RECORDS

REGULAR 76.53

59.95

Enjay fine stereo performance with this "easy-to-ossemble" exclusive Lafayette package. The complete system consists of Lafayette KT-126 basic stereo phana amplifier kit, the tenowned Callara TSC-040 4-speed automatic record changer, the new Ronette "OV" Turnaver Stereo cartridge with dual sopphire styli for stereo and monoural records, and two Lafayette SK-109 Miniature HI-FT Speakers and Enclaveres. The omplifier kit has many fine features including 2 watts per channel with separate volume control, "stereo reversal-manaural operation" switch, and isolation transformer to eliminate shock hazard. The 4" x 6" 5 watt speakers are housed in beautiful mahagany wood cobinets, work from cither 4 or 8 ohm outputs and are supplied with 25 ft. of cable for hookup. You save 10.58 over regular catalog prices! work fram cither 4 or 8 onm outputs and one separate over regular catalog prices!

Net 59.95

RKT-126 Stereo Phono Kit System

KT-126 Stereo Amplifier Kit Only. Complete with all tubes, parts and instructions. Shaps. wt., 7 lbs.

Net 18.95

COMBINATION MONEY SAVER
The KT-126 Stereo Amplifier Kit and Ronette "OV" Stereo Turnover Cartridge with dual sapphin

3 TRANSISTOR SUPERHET POCKET RADIO KIT NO EXTERNAL GROUND

o NO EXTERNAL GROUND

A remarkable sensitive, super-selective pocket superhet receiver with autonishing performance over the complete broadcast band. Uses 2 high-frequency and one audio transitor plus efficient diode detector and features 2 specially matched IF transformers for maximum power transfer. The components are boused in a professional positive for maximum power transfer. The components are boused in a professional positive for maximum power transfer. The components are boused in a professional positive for maximum power transfer. The components are boused in a professional positive for maximum power transfer. The components are boused in a professional positive for maximum power transfer. The complete with all parts, transistors, ease, dial received for the professional power for the



CANNON AM-15-1 Single Headset ..... BATTERY 1½ v. Burgess No. 7 (2)



AND 2 TRANSISTOR POCKET

RADIO KITS

ONE TRANSISTOR POCKET RADIO KIT—KT-97

ONE TRANSISTOR POCKET RADIO KIT—KT-97

IDEAL FOR STUDENTS, HOBBYISTS AND EXPERIMENTERS

PRE-PUNCHED CHASSIS FOR ADI
VANCEMENT TO 2 TRANSISTOR KIT
Ideal, low-cost transistor pocket radio kit
Super-selective ferrite loop antenna permits
good reception up to 50 mile radius with
approx. 50 ft. antenna and good ground.
Provisions for advancement to 2 transistor
receiver. Complete Kit with simple detalled instructions. 3%" z 2%" z 1". Shops.
wt. 1 lb. (less bottery)
KT-97—Complete, less earphones.
and hatterles.

Net 3.95

TWO TRANSISTOR POCKET RADIO MT

TWO TRANSISTOR POCKET RADIO KIT—KI-98
Contains all KT-97 components plus additional R-C coupled transistor state for increased sensitivity and output. Complete with instructions. Shps. wt. 1 lb.
KI-98 — Complete 2 Transistor Kit, less earphone ... Net 3.45
KI-98 — Complete 2 Transistor Kit, less earphone ... Net 3.45
MS-111—Crystal earphone for KT-97 and KT-98 ... Net 1.19
MS-240—Super power dynamic earphone ... Net 3.95
BATTERY 11/2 V. Burgess #7 ... Net 0.8

NEW! SEMI-AUTOMATIC "BUG" SUPER SPEED TELEGRAPH KEY

9.95

Value 20.00

...Net 9.95

### CODE PRACTICE SET

Economical and practical code practice key and buzzer unit for learning code. Telegraph key chrome and nickel plated Telegraph key chrome and nickel plated The high frequency buzzer has frequency adjustment with high frequency buzzer has frequency adjustment with token to keep tone constant. Screw type pin jack terminals tocknut to keep tone constant. Screw type pin jack terminals tocknut to keep tone constant. Screw type pin jack terminals tocknut to keep tone constant. Screw type pin jack terminals bothery. Heavy black molded phenolic base and buzzer house battery. Heavy black molded phenolic base and buzzer house wit. 2 lbs. "X 2½" x 1½", overall length B½". Shps. wit., 2 lbs. "MS-438 Code Practice Set (less bottery) 1.79

BATTERY Burgess 2 MS-369 Stethoscope Headsel

NEW! LAFAYETTE "BRASS-POUNDER'S" KEY



e With Boll-Bearing Pivats
e Solid Polithed-Brass Bose
A better quality precision-made key
designed for hard usage. Polished
brass base; spring tension and contot clearance adjustments; 3/16"
silver contacts. Bose 3" x 2", overall
size 5" long x 2\%" wide x 1-1/16"
high. Shpg. wt., 11/1 bs.
MS-428 Telegraph Key
Net 1.95

SAVE ON NEW TELEGRAPH KEY



Economical and practical code practice key. Solid, heavily chrome and nickel plated metal parts, molded nickel plated metal parts, molded prescribe base. Adjustable spring tention and adjustable contact clearance, sind and parts and solid parts and parts a Net . 69

NEW! high frequency




CODE PRACTICE BUZZER

Reg. Value 2.50
Adjustable frequency buzzer ideal for individual or group cade practice. Black molded phenalic housing — Works with 1 V<sub>2</sub> volt battery. Screwaliusment for changing tone. 1 V<sub>2</sub> diam. x 1-1/16" high. Shpg. wt. 6 ozs.
M3-436 Buzzer
Net .79

### LAST MINUTE RELEASES and SPECIAL VALUES

### **GONSET 2-WAY RADIO**



No exam required . . . no code. U.S. Citizens required only to complete simple F.C.C. form

A complete 2-way vaice transmitter-receiver and power supply in a single compoct unit operating an the 27 MC Citizens Band. Crystal controlled for highest stability—no fussy tuning—no drifting off channel frequency. Simple press-to-talk feature on microphone leaves one hand free white using set. Speaker is built into front panel—incoming calls easily heard some distance from set. Full 5-watt transmitter (maximum allowable) for maximum range. Other features include an adjustable "squetch" control for muted standby operation and tuning indicator on front panel for visual check of proper transmitter operation. Foolproof, lightweight, dependable, this new citizens radio has hundreds of uses—boating, hunting, fishing, emergency communications, construction crews, surveyors etc. Complete unit measures only 5½" H x 6¾" W x 6¾" D. Shpg. Wt., Ibs. Three models available: 12 Yalts DC only; 6 Valts DC only; 115 Valts AC only.

MODEL 3303. Complete with microphane and transmitter/receiver crystals for one channel. Less antenno. For
115 Volts AC Net 124.50
MODEL 3304. Same as above, but for 12 Volts DC aperation Net 124.50
MODEL 3305. Same as above, but for 6 volts DC opmodel 3305. Same as above, but for 6 volts DC opmodel 3405. Net 124.50

#### ANTENNAS FOR GONSET 2-WAY RADIO

ANTENNAS FOR GONSET 2-WAY RADIO

Highest quality antennos, ruggedly built far use in voried climatic conditions. For base station or mobile service.

Mobile antenno—Coil loaded whip antenna—Model 3297

Not 13.50

Ground Plane Base Station Antenna—Complete with 50
ft. of transmission line, hordware and ready for installation—Model 3296

Net 39.95

Net 39.95



### KIT OF 20 INSULATED **ALLIGATOR** CLIPS

Two kits of insulated alligator clips. Kit A consists of 20 large size clips, kit B consists of 20 small size clips. All have sturdy nickel-plated jows with strong spring and hard bite. Each kit contains 10 red and 10 black alligator



### KIT OF 10 5-WAY BINDING POSTS

- FOR BANANA PLUG
- FOR PHONE TIP PLUG
   FOR SPADE LUG
- FOR ALLIGATOR CLIP
- FOR STRAND OF WIRE











### RADIO RECEIVERS

	KAD	IO KE	CEIT	EKS	
Burgess	RCA Type	Replaces Eveready	Volts	Shpg. wt	Net. E
1	VS035A	935	1%	4 oz.	.13
20	V5049	720	1 1/2	3/4	.69
26	VS 14 1	W3 53	1 1/2	1 1/4	.77
28	VSO36A	950	1 1/2	6 oz.	.13
47	V\$004	742	1 1/2	2 -	1.15
SR	V\$070	960P	1 1/2	8 oz.	.46
21R	V5236	964	1 1/2	3/4	.28
37		_	11/2	-	.65
Z	V5034A	915	1 1/2	4 oz.	.08
03	VS072	726	41/2	1 1/4	.76
F3	V5067	736	41/2	2	.82
G3	V\$002	746	41/2	2	.85
2F4	VSOID	718	6	31/2	2.73
F4P1	V\$009	744	6	21/2	1.04
Z4	V5048	724	6	1/2	.63
8.5	V5129	713	71/3	1 1/4	1.26
C5	V\$065	717	71/2	1 1/4	1.05
***************************************	Porte	ble "B"	Batter	les	
UIS	V5084	412	221/2	4 oz.	1.05
A3D	V5014	W359	45	21/2	2.49
830	V5012	484	45	31/4	2.98
M30	V5013	482	45	3	2.45
U30	VSD86	415	45	1/4	1.75
XX30	V5055	455	45	1 1/4	1.92
<b>Z30</b>	V5015	738	45	2	2.76
K45	V\$082	457	671/2	1	2.21
P45	V5218	477	67 1/2	1 1/4	2.17
	V5215-216		671/2	1 1/2	2.75
	V5318	416	671/2	V <sub>2</sub>	2.07
	V5014	467	671/3	1 1/2	2.45
XX50	V5217	437	75	1 3/4	3.15
N60	V5090	490	90	2	3.15
	V5316	495	90	1 1/4	3.15 2.77
P60	VS219	479	103%	1 1/4	4.60
XX69	V5003	W361	300	2	7.70
U200	V5093				7.70
	Portabl		nd "8"		
21XX40	_	W370	11/4-60	2	4.11
47Z60	V5064	729	11/1-90	41/4	4.03
6TA60	V5054	W369	1 1/1-90	51/2	5.48
17GD 60	V\$022	759	1 1/2 - 90	21	7.21

Flashliah

6 7 N Z 4F2H F4H F4SC

### BATTERIES FOR PORTABLE TRANSISTOR AND HEARING AID BATTERIES

BURGESS	RCA	REPLACES EVEREADY	VOLTS	SHPG.	ET EA.
NE	V5073	W468	1.5	l oz.	.08
A4			1.5	2 oz.	.69
4D4	_	274	6	3 lbs.	3,05
2N6	V\$305	246	ŏ	1 16.	1.30
206	V5323	216	ý	3 oz.	.95
223	V5324	243	41/2	% oz.	1.11
COX	-	2356	9	2 lbs.	1.10
OS	V\$315	707	71/2	1 Ib.	1.05
06	V5306	276	9	1 1/2 lbs.	1.26
DOPT	V5301	2506	3.6.9	2 lbs.	1.58
Des	_	2761	0	1 %	1.05
Mó	V5322	266	ý	2/5	1.05
Pé	_	226	9	3 oz.	.77
XX9	V\$304	239	9-13.5	4 oz.	.95
K10	_	417	15	4 oz.	1.16
Ülo	V5083	411	1.5	2 oz.	.81
YIO	_	504	15	2 oz.	.81
KIS		420	22.5	4 oz.	1.23
Üis	V5084	412	22.5	3 oz.	1.05
YIS	13014	505	22.5	2 02.	1.05
K 20	_	430	30	6 oz.	1.51
U20	V5085	413	30	2 oz.	1.23
Y 20	13003	506	30	2 oz.	1,30
Y 205		507	30	2 oz.	1.30
1 103	V\$313	E9	1.4	3 oz.	.51
_	V5400	E233	4.~	6 oz.	1.80
	V5312	E146	ō	2 oz.	1.58
POM	V5300A		ó	5 oz.	.95
rom	V5309A		ó	2 oz.	1.53
130	V\$335	635	1 1/2	3 oz.	.16
230	V\$336	A100	1 1/4	6 oz.	. 16
<b>930</b>	V5334	1015E	1 1/2	4 oz.	.13
,,,,	V5321	2731	41/2	3 lbs.	1.93

#### MALLORY MERCURY BATTERIES FOR TRANSISTOR & RADIO APPLICATIONS

	~~	3141			~		
Type	Volts	Cap.	Max. Droin		Shpg. Wt. Ea.	Singly Eo.	Std. Pkg. Ea.
TR 15 2R	2.5	400	40	2	2 oz.	.79	.72
TR 132R	2.5	1000	100	2	J oz.	.92	.84
TR 133R	4.0	1000	100	2	3 oz.	1.30	1.18
TR 233R	4.0	2200	60	1	9 oz.	1.80	1.80
TRIGSR	6.5	500	50	2	3 oz.	1.80	1.64
TR 146R	9.0	400	40	8	3 oz.	1.58	1.58
RMIR	1.34	1000	100	4	3 oz.	.42	.38
RM12R	1.34	3600	250	2	3 oz.	.90	.82
RM400R	1.34	80	10	5	l oz.	.28	. 25
RM401R	1.34	800	100	2	2 oz.	.37	.34
RM502R	1.34	2400	200	2	3 oz.	.68	.62
RM601R	1.34	1800	150	2	3 oz.	.56	.51
RM625R	1.34	250	20	4	1 oz.	.33	.30
RM630R	1.34	350	20	4	loz.	.33	.30
ZM9	1.5	2400	200	2	5 oz.	.56	.51
DM-9N	1.5	2400	200	2	5 oz.	.59	.54

### BATTERIES FOR PORTABLE RECORDERS

MFR.	YYPE	VOLTS	SHPG. WT.	NI
Burgess	2X7	101/2	1/2 lb.	1.1
Burgess	2X62X	11/4-9	⅓ lb.	1.1
Burgess Mallory	3XX7 302478-M	9.0	%	3.7
mailory	302470·M	7.0		-

### ETTE STEREOPHONIC PHONOGRAPH

FULLY AUTOMATIC GARRARD CHANGER TWO POWERFUL 10 WATT AMPLIFIERS



### FLEXICONE KIT



 REDUCES SPEAKER CONE RESONANCE
 IMPROVES EBEQUEENCY IMPROVES FREQUENCY RESPONSE

Thoroughly tested and opproved, Flexicone will improve your speaker sound quality and frequency response by softening the outer edges of the speaker cone thereby reducing the cone resonance from 10 to 40 cps. Easily applied in just 15 minutes. One three-bottle kit contains enough material for four 8" speakers. Complete with in-


#### TONE ARM CONTROL



An absolutely essential addition for every Hi-Fi enthusiast. Record, cartridge and needle life will be greatly extended by the use of this tane arm control. Accurately and smoothly places tone arm in record run-in groove and lifts arm off record at end of play. Ideal for "cueing." Designed to fit practically every known turntable arm upplied with both wood and metal mounting screws also applied with adhesive mounting base which eliminates rilling mounting holes.

MS-572 TONE ARM CONTROL

#### FLEXIBLE AUDIO CONNECTORS



(A) Phono Plug connected to 2 Phono Jacks by 4" shielded SWITCHCRAFT 330FI (B) Phono Jock connected to 2 Phono Plugs.
SWITCH CRAFT 330F2 Net 1.18
(C) 3 Phono Plugs connected together by 4" shielded

SWITCHCRAFT 330F3 Net 1.18

SHIELDED "Y" ADAPTERS



Completely shielded Y-Adopters with choice of connectors and terminations.

(B) Two phana jocks in parallel to RCA type phana plug. M5-596 Net .69 (E) Three RCA type phano jacks in parollel.

(F) Two RCA type phono jocks in parallel to a standard phono plug. M5-595



iniature 2-input hi-impedance mike and phono mixers, sparate gain controls for mixing. Shielded housing, Ideal or use with tope recorders, musical instruments, phonophs, microphones. Size 2-1/6" x 1-13/16" x 1-14/16".

20.—Microphone connector inputs and autputs .Net 4.67

10.—Phone jack inputs and phone plug autput. Net 4.67

8266—Coble assembly with plug and jack to use No. 310 where equipment jack is recessed...Net 2.20 

SWITCHCRAFT 665

A complete portable and campact sterea phonograph in one convenient case. System uses the well-kinown Garrard RC-121/11 4-speed stereo changer which features true intermix of 12" and 10" records in any order with instant selection of either automatic or full manual operation. Uses a stereo turnover cartridge to play all your records—whether monoural or stereo. Two powerful 10 watt amplifiers provide a frequency response of 50 to 12,000 cps. Controls included: Master Volume: Remote speaker volume, Master treble; Moster Bass. Detachable front speaker cabinet houses o 6" x 9" speaker with 19 ft. extension cord. Main unit houses two speakers—one 6" x 9" woofer and one 4" tweeter. Phonograph has easy-grip handle on obtractive smart-looking Pyroxylin covered case. Size: 18½" long, 15¾" wide, 9" high. Shgp. xt., 36½ lbs.
PH-128 Complete Stereo phonograph with remote speaker.

### SENSITIVE MINIATURE RELAY \$2.95 ea. WHILE THEY LAST



Extremely small, sensitive relay — weighs only ½ azl Double-pole double-throw, with silver and silver-gold-plotinum alloy contacts. Contacts handle up to 100 volts at 300 ma. (30 waits). Coil measures \$300 ohms did cresistance-roted at 4.1 ma. dc. pull-in current, 0.95 mo. dc. drop-out. Enclosed in transparent plostic dust cover, Operating time 2.8 millisers; release time about 1.5 msecs. Breakdown voltage ratings: coil to frame, 500V; contacts to frame 350V. Measures 1-1/16" x 11/16" x ½". Ideal for model control, photocell relay, carrier-current control and dozens of other miniature applications. Shpp. wt., 4 az.

F-332—DPDT Miniature DC Relay

Net 2.95


### SWITCHCRAFT STEREO AUDIO CABLES



Two shielded insulated cables, (of different color tones, for easy identification of chonnels) inside a common chrome grey plastic locket, providing two completely isolated channels.

TYPE	LENGTH		NET
25FF25 25FK25 25FN25	36" 6' 10'	Phono Plugs ot all ends.	1.91 2.20 2.65
25FF84 25FK84 25FN84	36" 6' 10'	2 Phono Plugs at one end, other ends Stripped ond Tinned	1.71 1.91 2.20

### SWITCHCRAFT AUDIO CONNECTORS AND ADAPTERS



(G) MULTIPLE SELECTOR CONTROL Connects ony one of 5 input circuits (AM, FM, PHONO, TAPE AND AUX) to one output. Attractive tan housing is completely shielded. Complete with mounting hordware: SWITCHCRAFT 664

(H) STEREO-MONAURAL SELECTOR
Provides instant switching from manaural to Stereo. Two
Phono Jax input and two Phona Jax output. Attractive tan
housing is campletely shielded and may be mounted on
cabinet. Supplied with mounting screws.
SWITCHCRAFT 661


Net 1.76 Net 1.76

(1) STEREO-MONAURAL SELECTOR WITH REVERSE Same as Switchcraft 661 but with channel reverse feature. SWITCHCRAFT 662 Net 2.06

(3) SPEAKER PHASE CONTROL.
Correct speaker phasing is essential in multiple or Stereo Speaker installations. This completely shielded control is ideal for this opplication. Attractively finished in tan with easy to use screw terminals. Supplied with mounting hard-

### Save 331/3 to 50% on MINIATURE-TRANSISTOR & R/C Equipment

### NEW! Lafayette's SUPER-TROL R/C EQUIPMENT



(A) RADIO CONTROL TRANSMITTER: Assembled-tested-guaranteed. No license examination required for operation. Crystal controlled for stability and to meet F.C.C. regulations. Uses powerful 3A5 tube for range of approximately one mile. Will operate any 27.255 mc R/C receiver. Overall dimensions only  $8\frac{1}{2}$  x  $2\frac{3}{4}$  x  $1\frac{3}{4}$  — just a handful! Includes antenna — tube — crystal — and instructions. Less Batteries. Shpg. wt.,  $2\frac{1}{2}$  lbs.

Batteries required: Burgess U30 (3 needed) . . . . . 1.75 ea. Burgess #2 (1 needed) . .

(B) RADIO CONTROL RECEIVER: Completely wired and tested receiver—extremely sensitive and stable. Completely enclosed—ideal in boats—or case may be removed if desired, Ingeniously constructed to withstand vibration and shock. Features external fine tuning—antenna "snap" lead—plug for power and actuator connections. Ideal Companion for F-249 Transmitter and F-327 Servo shown elsewhere on this page. Requires one 1.5V battery and one 67.5 Volt battery. Size determined by use. Measures only 3" x 2¾" x 1½". Complete with tube and instructions. Less batteries. Shpg. wt., 8 oz.

SPECIAL COMBINATION OFFER

Consists of R/C Transmitter (F-249), and R/C Receiver (F-208) F-259 — Combination



### "JEWEL" **REMOTE** CONTROL RELAY

A natural far remate control receivers, it is highly sensitive, and built to withstand severe croshes. The smallest commercial job available, it weighs less than ½ as. Factory adjusted to pull in at 1.4 MA. drop out at 1.2 MA D.C. Single pole, double throw. Used in outstanding R/C receivers. 5,000 ahm coil. IMPORTED TO SAVE YOU MONEY.

P.260—Relay

### 27.255 R/C CRYSTAL



Reg. 2.95 1.95

Specially manufactured far Lafayette. Designed specifically for use in R/C model planes, baots, cars, etc. Law-drift — high output — dependable frequency control. Tolerance .04%, 13/16" wide x 7/16" deep x 11/8" high above pins. Pins on 1/2"

MS-446 ... Net eq. 1.95



MATCHING CRYSTAL SOCKET:

with PLASTIC CASE

### miniature TELESCOPING **ANTENNA** .59 RETRACTS to 9 INCHES

### LAFAYETTE PNP AUDIO **TRANSISTOR** SPECIAL! 59¢ MANITOR TORONTO





General audio type PNP transistor for experimenters and hobbyists, for code practice ascillators and similar small signal devices. In new JETC 30 welded case.

SP-146 .

Net, singly, each 59¢ 10 for 4.50, 50 for 19.50, 100 for 37.00

#### **NEW! MOTOROLA** 2N554 POPULAR LOW COST AUDIO POWER

TRANSISTOR

- . 40 WATT COLLECTOR DISSIPATIONS
- 2 WATT CLASS A OUTPUT\*

FREE with each 2N554 New Motorala Circuit Applications folder on HOW TO BUILD A TRANSISTORIZED AUDIO POWER AMPLIFIER, Power Control, Battery Charger, Model Power Supply, Model Train Control, Toy Electronic Organ, Geiger Counter and DC to DC Converter.

\* With Heat Sink

Power transister maunting kit with perglass insulating washer. cooted fiberglass insulating washer.

MK-15 Same as above, but with mica insulating washer.

Net .25

MK-20 As above, but with anadized aluminum insulating
Net .40

#### NEW! MULTI-PURPOSE ELECTRIC SERVO MECHANISM

- POWERFUL, MOTOR DRIVEN R/C ACTUATOR
- POSITIVE, INSTANTANEOUS ACTION
- . FOR MODEL BOATS AND CARS

Lofayette's new, motor driven, remate control serva-mechanism. Imported by Lafayette to sell far half the price of any comparable until Carefully constructed far power, durability and rugged use. Operates with any single channel, remote control receiver and transmitter. When aperated at the prescribed 3 volts, the action is accurate and rapid. Provides for selective steering and automatic return to neutral. Extremely efficient when used with model boots ar land vehicles. Habbyists will find uses for the serva-mechanism restricted only by their imagination. Single pulse aperation—electronic neutralization. Measures only  $2\frac{1}{2}$ " x 2" x  $1\frac{3}{4}$ " overall. Includes instructions and linkage to extend actuator arm. \$hpg. wt., 8 azs.



### REMOTE CONTROL ESCAPEMENT

. AT THE LOWEST PRICE ANYWHERE!

A sturdy 2 arm self-neutralizing escapement. Completely wired (not a kit). Converts electrical impulses from remote control receiver to mechanical motion for varying movement of plane, boat, or car. Four 90° rotations—two by armoture activation, two by neutralization. Has ratched governor for maintaining foolproof rotating speed. Weighs only 7/8 oz. Size: 1-3/8" L x 2" W overall. Ships. wt., 5 oz.



### REMOTE ENGINE CONTROL ESCAPEMENT

### COMPOUND REMOTE CONTROL ESCAPEMENT LAFAYETTE'S AMAZING VALUE IN A 4-ARM SELF-NEUTRALIZING COMPOUND ESCAPEMENTI

. NO NEED TO WORRY ABOUT LOSING YOUR MODEL!

You have no sequence of operation to warry about 1 Simple as A B CI One pulse always gives right turn; two pulses always gives left turn. Three pulses closes the circuit for the supplementary cantral such as mator (F-257) or elevator, if used. The rudder always returns to neutral position after any turn as soon as transmitter keying button is released. With ratchet governor for foolproof operation. Sturdy construction—low current drain. Uses 1-1/2 valt bottery. Weighs 1-1/8 az. Size: 2-7/8" L x 1-9/16" overall. Shpg. wt., 6 oz.

.Net 3.95

### POWER TRANSISTORS



Rea. Value -1<del>.35</del>

### **EACH UNIT FACTORY TESTED** TO MEET SPECIFICATIONS

EQUIVALENT TO: **CBS 2N256** SYLVANIA 2N307 **MOTOROLA 2N554** 

SP-147 Power Transistor

Net .77

### **GENERAL PURPOSE DIODES**

4.95



2.59

10 for

**EXCELLENT DETECTOR FOR** TRANSISTOR AND VACUUM TUBE RADIO RECEIVERS

**1N34A** 1N48 1N56 1N69

SP-148 General Purpose Diode Net .29 each 10 for 2.59

### NEW! LAFAYETTE 27.255 MC CITIZEN BAND REMOTE CONTROL TRANSMITTER KIT KT-127

- WAY OVER 1 MILE LINE OF SIGHT TRANSMISSION!
- SUPER STABILITY FOR FOOLPROOF CONTROL OF MODEL PLANES, BOATS AND CARS.

KT-127, Less Batteries. Burgess No. 2 (RCA VS036) Battery Net .13

### DYNAMIC EARPHONES FOR TRANSISTOR AND SUBMINIATURE RECEIVERS FOR SILENT RADIO AND TV LISTENING.



MS-366 6 ohm impedance with subminiature plane plug and matching phone jack Net 1.19
MS-368 2000 ohm impedance with subminiature phone plug and matching phone jack Net 1.05



As Low

#### AT LAFAYETTE'S LOW PRICES!

COPPER CLAD LAMINATE

Finest quality XXXP bakelite base, copper clad boards for printed circuit work.

NO.	DESCRIPTION	NET
MS-510	XXXP Copper Lam 1 side-9"x12".	1.50
M5-511	XXXP Copper Lom1 side-6"x41/2"	.45
M5-512	XXXP Copper Lam1 side-3"x41/2"	30
MS-513	XXXP Copper Lom1 side-2"x41/2"	25
MS-514	XXXP Copper Lam1 side -3"x2"	24
MS-515	XXXP Copper Lam2 sides -9"x12"	. 1.95
MS-516	XXXP Copper Lam2 sides-6"x41/3"	
MS-517	XXXP Copper Lam2 sides-3"x41/2"	40
MS-518	XXXP Copper Lam2 sides -2"x41/2"	.30
MS-519	XXXP Copper Lam -2 sides-3"x21/4"	.27

#### PLASTIC CASE FOR MINIATURE **EQUIPMENT**



Reautiful pocket sized modern streamlined case with rounded corners and
removable snap-on cover. This is an
ideal case for that transistorized receiver—ur other miniature or subminiaature preampilifer, ampliffer, oscillator
or transmitter. Two pre-drilled apertures, a 2½" diameter opening ideal
for volume control and switch. In addition, there are two small
upenings on the side for such internal leads as antenna or earprime. Experimenters, builders and hobbylsts will want to stock
up on several of these cases at this low bargain price. Size:
1½" x 2½" x 1½". Shpg. wt., 6 oz.

MS-302.

NEW! Lafayette Super-Value Sun Battery QUANTITY LIMITED!



TRANSISTOR OUTPUT TRANSFORMER

### SUPER MICRO-MOTORS

- . HALF THE WEIGHT-TWICE THE POWER!
- HIGHER SPEED-LOWER DRAIN!
- . PERMANENTLY LUBRICATED!
- DOUBLE PERMANENT FERRITE MAGNETS!

Expetily usigned, miniature, D.C. permanent magnet mators. Ruggedized canstruction for industrial use. Highest power and speed to weight ratio of any miniature mator makes these a "natural" for madels and remote cantrol applications. Ferrite magnets preclude possibility of demagnetization and offer minimum weight. Unique, precision farmed device permanently centers cammutator in precise position. Utilizes phasphar-branze brushes and brass sleeve bearings. May be mounted by means of topped hole in mater case. Avg. Shpg. wt., 4 oz. Complete with leads. Shaft diameter 3/32"

Stock | Vets. | E-c. | 1

 Volt.
 Drain Ma.
 RPM
 H.
 W.
 L.
 Wt.

 1.5.4.5
 200.300
 5000.6000
 1 " 1½" 1½" 1½" 1½" 2½ oz.

 3.6
 250.300
 6000.7000
 1½" 1½" 1½" 1½" 2½ oz.

 1.2.16
 90.140
 8000.9000
 1¼" 1¾" 1¾" 1¾" 1½" 2½ oz.





### NEW POWER TRANSISTOR AUDIO TRANSFORMERS

. DESIGNED FOR HIGH OUTPUT TRANSISTORS

• USED IN AUTO RADIOS - PA SYSTEMS -INTERCOMS — ETC. OUTPUT TRANSFORMER

Rated 6 watts. Frequency response 70 to 20,000 cycles  $\pm$  2 db. Primary impedance 48 ahms center tapped. Secandary, 3.2 ohms. Primary DC resistance 1.1 ahms, secand ary 0.3 ohms. Unbolanced primary current 500 ma DC. Size 1-9/16" x 1%" x 1-9/16" Shps. wt., 1 lb. AR-503

Net 1.75

INPUT TRANSFORMER

Roted 2 wotts. Frequency response 70 to 20,000 cps ± 2 db. Primary impedance 100 ahms. Secandary impedance 200 ahms CT. Primary DC resistance 1.8 ahms, secandary 2.7 ahms. Unbalanced primary current, 200 ma DC. Size 1-9/16" x 1½" x 1-9/16". Shap. wt., 1 lb.



### **NEW! UNIVERSAL POWER** TRANSISTOR OUTPUT TRANSFORMER

- . DESIGNED FOR THE EXPERIMENTER • PRI, TAPPED AT 8-12-16-24-32 AND 48 OHMS
- RATED 10 WATTS

Lafayette's latest transistor circuit component. Engineered for construction projects using the increasingly popular power transistors. Will also serve as a general replacement for meny transistorized auto-radios. Rated at 10 words for push-pull aperation. Primary tapped at 8, 12, 16, 24, 32 and 48 ohms. Secondary tapped at 4, 8 and 16 ohms. Sizes 3 1/16" x 21/4" x 2.9/16". Shpg. wt., 3 lbs.

Page 26

RADIO CONTROL EQUIPMENT IS AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38

### SERVICEMEN AND DEALERS! LOOK AT THESE PRICES!

LAFAYETTE LETELY TEST COMPLETELY EQUIPMENT SENSATIONAL VALUES AT LESS THAN THE PRICE OF KITS!

### TV-FM SWEEP-MARKER-ALIGNMENT GENERATOR


SWEEP RANGE 3MC-260 MC • MARKER RANGE 3MC-225MC CRYSTAL CALIBRATION OF BOTH SWEEP AND MARKER COMBINATION CRYSTAL AND VARIABLE MARKER—1% ACCURATE! precision instrument that incorporates in a single unit bath TV-FM veep and crystal marker generators with all the features required for curvate alignment at 1f and RF stages of TV and FM receivers. Covers MC-260MC in 2 bands. Sweep width is continuously variable from 0.12MC mare. 3 volts RMS, 60 cycle sine wave horizontal sweep voltage available from front panel. The marker covers 3MC-225MC in 4 averlapping larges. Marker calibration is accurate to better than 1%. The 4.5MC systol supplied mounts on front panel socket and is accurate to 0.002%. F autput is over 100,000 microvolts and is controlled by the 3 step (XI.) X100) attenuation and the continuously variable fine adjustment shall. Output impedance is 75 ahms, unbolanced. Contrals are sweep idth, horizontal phase, electronic retrace blanking with off position, arker amplifier, RF autput 3 step multiplier, RF autput fine adjustment, weep range selector switch and marker range selector switch. Crystal tacket, pilot light and external marker range selector twitch. Crystal tacket, pilot light and external marker input are also on front panel. therefore the surface of the continuously variable metal cobinet. Struky groy wrinkle metal cobinet. Convenient handle. Size "x 13½" x 6". Shpg. wt., 20 lbs.

Net 79.50



Factory Wired and Tested





### Wew! MINIATURE POCKET MULTITESTER

ONLY

- 20,000 \(\Omega/\neg DC\) SENSITIVITY 10,000 Ω/V AC SENSITIVITY
- 1% RESISTORS
- . WEIGHS ONLY 10 oz.
- . 38 HA MOVEMENT
- 23 RANGES
- . COMPLETELY WIRED






A New Kind THE DIFFICULT ALREADY DON

20,000 OHMS PER VOLT DC
 10,000 OHMS PER VOLT AC
 11.95

40 MICROAMPERE 3" D'ARSONVAL METER MOVEMENT

common to low resistance testers which load the circuit.
Ranges: DC Volts, 0-10-50-250-500-1000; AC Volts, 0-1050-250-500-1000; DC CURRENT, 0-500 up. 0-10-250 mp;
OHMS, 0-10K-100K-1 mpg; DECIBELS, 20 to +36; PLUS
0-5000 henries and 250 mmf. to .02 mfd. Black cose
53/4" x 3/4" x 1/4". Complete with test leads, all parts,
and instructions and battery. Shpg. wt. 3 lbs.
TK-10 KIT Net 11.95



and eradicating of switch markings, protecting your meter and preserving its appearance. Single selector switch with positive detents and clearly marked positions permits one-handed aperation. Recessed, break-praof zero-ahms knob permits easy adjustment, yet cannot be braken even under raugh handling.

Has 23 ranges at the unusually high sensitivities of 20,000 ahms per valt DC, 10,000 ahms per valt AC: DC Volto, 0.5-25-100-500-1000; AC Valts, 0.5-25-100-500-1000, OHMS; 0.6 K-600K-6 Meg-60 Meg; DC MILLIAMPERES, 0.05 (50 microomps) -5-50-500; DECIBELS, -20 to +64

Truly a superb instrument far any application. Complete with 1.5 volt and 15 volt batteries, and vinyl insulated flexible test leads, Shpg. wt. 1 lb.

AR-660 MINIATURE POCRET VOM

Net 17.50

### A LAFAYETTE SPECIAL

COMPLETELY WIRED - NOT A KIT MOST ADVANCED ENGINEERING TO FIT



A new streamlined tube tester with a realistic approach to the problem of quickly testing the ever increasing number of tube types. It incorporates new and advanced engineering features and all at a price of about half of even the most ordinary tube tester. Read these Specifications.

tube tester. Read these Specifications.

"FREE POINT" ELEMENT SELECTOR SWITCHING: Newly designed, it reduces possibility of
obsolescence to a minimum because any pin may
be used as a filament pin and voltage applied between it and any other pin, or even the "top cap".

Tubes with tapped filaments or with filaments termineting in more than I pin are truly tested.

MULTIPURPOSE TUBES: Special isolating circuit
allow each section of multi-purpose tubes to be
tested individually as if it were in a separate
envelope.

envelope.

SHORTS AND LEAKAGES: Supersensitive method checks shorts and leakeges up to 5 megahm between any and ALL elements; continuity between various sections individually indicated.

SIMPLICITY: Feat simple operation. The 4 position fast action snap switches are all numbered in exact accord with RMA standards. Thus when testing element terminating in pin No.7 of a tube - you use buthon No.7. You can't insert a tube in the wrong socket—there's one for each type of tube bats.

SIZE: A practical size to carry with you at well as for use in the shop—only 8½ x 6½ x 2½" deep. Shop, Wt. 5 lbs.

MODEL TO-55—camplete with carrying case and instructions. 26.95





LOOK AT THESE
FULL SCALE RANGES!
P.C. Valrs: 0-6; 0-30; 0120; 0-600; 0-1200; 06000 Valls: — A.C. VOLTS:
0-6; 0-30; 0-120; 0-600;
0-1200 Valls: — RESISTANCE: 0-10K; 0-100K;
0-1 Meg; 0-10 Megohms: —
D.C. CURRENT: 0-60 Microamp; 0-6; 0-60; 0-600
Milliomps — DECIBEL: 20
10 : 7: 76 10 06 b0-0774V)
— CAPACITY: .0001-.01;
1005-15 mfd — INDUCTANCE: 20-2000 henries
— OUTPUT RANGES: 0-6;
0-30; 0-120; 0-600; 01200 Volts:
he new Lafayette high semvity Multiester is a comple
batrument (not a kit). In a

### EDGE-WISE PANEL METERS



- 2% FULL SCALE ACCURACY
- PRECISION D'ARSONVAL MOVEMENTS
- FRONT PANEL AREA ONLY

Precision D'Arsonval meters with 2% or better full scale accuracy. Front panel dimension is 3½ x 1". Overall depth is 3½" behind panel including terminals. Zero adjust screw. Shop. wt., ½ lbs.

VU METER—Colibrated and damped in accordance with standard VU meter practice. Upper scale reads —20 to —3 VU. Lower scale reads 0.100% modulation. Accurate to 2.0.5 VU from 30.15,000 cps.

TM-23 Net 5.95

rate to 0.5 VU from 30.15,000 cps.

TM-23
0-150 AC VOLTMETER—Full-wave bridge rectifier type.
1000 ohms per volt. 5 volts per division, lineor scale.
TM-22
Net 5.69
0-1 DC MILLIAMMETER—CALIBRATED from 0-1 mo in 0.02
mo divisions. Block scale, red pointer.
TM-21
Net 5.69

### FAMOUS RCA VOLTOHMYST IN KIT FORM



29.95! 49.95

> ONLY 3.00 DOWN

Wired

BURNOUT-PROOF!

28 RANGES

13% ACCURACY ON DC

RESPONSE ± 5% 40 CPS to 5 MC.

DC INPUT 11 MEG.

BURNOUT-PROOF!

28 RANGES

40 CPS to 5 MC.

### SQUARE PANEL METERS



HIGH QUALITY D'ARSONVAL MOVEMENTS ACCURACY 2% OF FULL SCALE 3%" SQ., ONLY 1-5/16" OVERALL BEHIND PANEL • BAKELITE CASES • JEWELLED

High quality, precision built meters with better than 2% of full scale occuracy.  $3/g^2$  square,  $2.5\cdot16''$  x  $1/g^2$  dial faces, 1.11/16'' overall depth  $1.5\cdot16''$  behind ponel including terminals. Require 2.9/16'' diameter mounting hale.  $1/g^2$  screw terminals plus solder lugs, 4 threaded mounting studs in corners. Zero adjust screw. Shpg. wt., 1.16.

ILLUMINATED SCALE VU METER

ILLUMINATED SCALE YU METER — Standard 3900 ohm

'Bo'' scale valume indicator colistated and damped in accordance with standard YU meter practice. Upper scale reads 0.100% modulation, lower scale reads 20 to ±3 YU (0 YU corresponds to 100%) Accurate to ±0.2 YU from 3.0.15.000 cps. With suddenly applied sine wave signal, meter will reach 90% of correct reading within 0.3 seconds; avershoot beyond correct reading is 1 to 11/3%. A root-mean-square instrument with full wave bridge rectifier. Includes built-in 6.8 volt bulb. Camplere with instructions.

TM-80 Net 7.50 Net 7.50 TM-80

O-50 DC MICROAMMETER

0-50 DC MICROAMMETER — Highly damped, sensitive movement, calibrated in 50 one-microamp linear scale divisions. Cushianed ceramic bumpers pratect pointer against overtravel and damage with moderate overloads

Net 7,50
0-1 DC MILLIAMETER
0-1 DC MILLIAMETER — Sensitive, quick-acting basic mayement (inear calibrations in .02 ma divisions, Black scale, red pointer TM...An TM-60 Net 3.95

0-150 AC VOLTMETER

0-150 AC VOLTMETER — Full-wave bridge rectifier type.
1000 ahms per volt. With precision corbon-film multiplier
resistor. 5 valts per division, linear scale

Net 3.95 METER RECTIFIER

A brond new, economical meter rectifier of exceptionally linear characteristics. This full wave rectifier is specially designed as a universal replacement for all modern multimeters, such as Lafayette's miniature V.O.M.'s. Simple to install, mounts with single screw. Long terminals facilitate easy connection.

Net .45

### Miniature

D'ARSONVAL MOVEMENTS

BAKELITE CASES • JEWELLED BEARINGS
ONLY 1-9/16" SQ. FACES, 11/4" OVERALL
BEHIND PANEL • ACCURACY 2" OF
FULL SCALE

FULL SCALE

UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUAL1TYI Ruggedly built miniature ponel meters, with excelient occurrory. 11/4" dial faces, with silvered dials and
black numerals and pointers. Accuracy 2% of full scale.
19-16" square fronts, 11/2" overall front-to-back, with
11/4" behind ponel including 1/4" terminals. Require 11/5"
diameter round hate in panel, 4 corner hales for mounting,
with 11/4" centers. Terminal polarity an DC madels clearly
marked. Screw terminals, Zero adjustment screw an front
of panel. Clear optical aloss fronts. Shpg. wt. 8 az

VU METER

of panel. Clear aptical aloss frants. Shpg. wt. 8 az VU METER — Volume level indicator, calibrated in standard 20 to 13 VU and 0-100% ranges. Uses precision carbon film multiplier resistor and full wave recitier. Damped in accordance with standard VU meter requirements, Reference level 1 mw in 600 ohm line. 10,000 ahms internal resistance. "O" VU is 1.225 volts sine wave AC across meter connected to 600 ohm source with 600 ahm load. May be used with T-pad attenuator. 0-100% scale used to indicate percent use of transmitter autput.

"S" METER — Standard "ham" signal strength indicator. Calibrated in "S" units from 0.9, with the scale terminating in ±10 and ±30 db calibrations. Additional full scale calibrations of 0.5 and 0.10 in linear scale divisions. A "must for radia amoteurs for conversion of any communications receiver with AVC action to give calibrated signal strength indications. Use of "S" meeter fully described in 1958 "Radia Amateur's Handbook" (Lafayette stack Na. BK-1000), pages 106-107.

DC MICROAMMETER 0-50 DC MICH AMMETERS
0-0-50 DC AMPERES
0-10 DC AMPERES
R. F. AMMETER
0-5 RF AMPERES
VOLTMETERS









### LAFAYETTE is your HEADQUARTE TENNAS AND



REGULAR LIST 13.45 OVER 60% OFF!

- ALL ALUMINUM
- NO LOOSE PARTS
- FASTEST INSTALLATIONS

FULL 20 ELEMENT STACKED

5.25

Snap Open Conical

Best antenno deal yet far servicemen-dealer-and installation specialists. All the most wanted features. Quickest-easiest installation possible. No loose hardware. All elements snap open and lack in without tools. Most efficient conical design for all reception areas. Two complete bays with Q bars, less mast. Shpg. wt., 8 lbs. Via Express anly.

AN-28—Singly, ea.

"U-INSTALL-IT" KIT With All Angle Roof Mounts. Includes AN-28 antenno and installation Kit as shown with two 5 ft. mosts.

AN-32—Via Express only. Shpg. wt., 18 lbs.

"U-INSTALL-IT" KIT With Chimney Mount. Same antenno and accessories but includes chimney mount instead of roof mount.

Net 8.75
AN-43—Via Express only. Shpg. wt., 18 lbs.

### **FAMOUS BRAND** Color 'Tenna

SUPER FRINGE AREA ANTENNA

The most recent advonce in antenna design and construction. Extremely high gain and front to back ratio. Phasing relationship assures equal gain on all VHF channels. Eliminates co-channel interference. Elements are double locked in high impact Styrene plastic insulatars. Automatic brackets lock and secure all elements. Completely preassembled. Entire onlenna snaps open and locks in. Dual insulators prevent waver, slip and thist of elements. All aluminum canstruction.

THE MAXIMUM ANTENNA FOR YOUR AREA.

MAXIMUM CONSTRUCTION.

AN-37 List 33.19.... Net 14.55 PERFECT 300s.MATCH AN-38 2 Boys stocked ...Net 29.58 ON EACH CHANNEL.

AN-37, 38 and 41 Shipped by Express Onlyl

ALL CHANNEL'S "RIVIERA"

WORLD'S MOST POWERFUL ULTRA-FRINGE

UNTIL SEPT. 15th 17.95

GUARANTEED 200 MILE VHF RECEPTION OR YOUR MONEY BACK

 Receives channel 2-83 from all directions without a rotor

 Broadband UHF-VHF and FM, motorless all direction recep-

All aluminum flip-out assembly

Field tests reception on VHF of up to 200 miles has made possible this unprecedented guarantee. Here is an antenna with one transmission line for all UHF, VHF and FM stations in all directions without the use of a rotator. The nine position selector switch connected at the set electronically rotates antenna beam instantly without physically moving the antenna. Gain on channels 2-6 comparable to 4-bey conicals; on channels 7-13 comparable to 4-bey conjucted in the conficulation of the conficulation of the comparable of the comparable of the conficulation of the conficula

ALL CHANNEL LEAD-IN WIRE FOR USE WITH RIVIERA ANTENNA Special 4 conductors, matched imped-ance transmission line. Low loss, mica-filled Palymicalene copperweld conduc-

VHF - UHF - FM ANTENNA

PRICE BREAK - Over 50% Off!

LIST 29.95

**SALE 13.95!** 

Gold Anodized

- High Gain On All VHF Channels
- **Completely Factory Preassembled**
- Electronic Lens Design
   Highly Directional Yagi Performance

Lafayette is the FIRST to offer this nationally tried and proven antenna at close to 25% off the regular dealer price. This is the same fine antenna—with all its exclusive features—that sells for dollars more than our ecord-breaking price. Check these features: Electronic Focussing—High Gain—all VHF channel coverage—anodized quolity construction—exists installation—autstanding fringe area reception—campact design dynamically balanced. All-aluminum construction—automatic hardware. Shpg. wt., 8 bs. VIo Express only.

AN-51 List 29.95

Camplete Kit of AN-51 ontenna plus AM-12 mtg. kit as shown. Shpg. wt., AN-52

LEADER INDOOR ANTENNAS

AN-39
3 Section Indoor Antenna (a): Adjustable indoor antenna. 3 section aluminum stoffs. Heavy, crackle finish base. Complete with 300r twin lead. Shpg. wt.. 2½ lbs. AN-12 ......Singly, eo. 1.15

AN-12

### **U-INSTALL-IT**"



e quick, easy installation from roof to receiver! You get on all angle roof mount—lightning arrestor—75 feet of 300 ohm twin lead—6 insulated screw eyes—2 insulated mast standoffs and a 5 ft., 1 1/4 OD steel most. Shpg. wt.,

AM-10..eg. 2.95 Lots of 3. eg...2.85 AM-11 with 2-5 ft. masts. Shpg. wt., 10 lbs. Singly, 3.55 Lats of 3, ea. 3.35 AM-12—Same os AM-10 but with chimney maunt. Ea. 3.25 Lots of 3, ea. 3.15

AM-13—Same as AM-11 but with chimney mount. Ea. 3.85 Lots of 3, ea; 3.75 NEW WUERTH SURGISTOR

combines functions of

RELAYI

RESISTOR

### LAFAYETTE LEADER KITS



SPECIAL TUBULAR AIR-SPACED TWIN LEAD ● UHF-VHF ● Extreme Low Loss

300 ohm oirspaced tubular lead with copperweld conductors. Shpg. wt., 3 lbs. per 100 ft.

2.50 per 100 ft.

WR-46-per 100 ft.

### BLONDER-TONGUE UNIVERSAL BOOSTER & COUPLER



BOOSTS SIGNAL FOR 1, 2, OR 3 TV SETS

- COUPLES 1, 2, OR 3 TV SETS
- WITH 1 ANTENNA WORKS WITH ALL TV SETS
   —IDEAL FOR COLOR TV
- PERFECT FOR MULTIPLE DWELLINGS

• FIXED TUNED-CHANNELS 2-13.
HANG IT ON REAR OF SET AND FORGET IT!

T\$-290-List Price 1.95.....Net 1.15

### TELESCOPING TY MASTS

Heavy-duty telescaping masts, ideal far any TV ontenna array. Hot-dip zinc golvanizing inside and autside provides unusual ruggedness and impenetrable carrosion resistance. Designed for easy installation and assembly. Husky thumb bolts lack sections automatically. No slipping, no twisting. Precision fitting assures latting service. 18 gauge .003" wall. Supplied complete with all guy rings, clamps and necessary hardware. Total 5 10-ft. sections for height up to 50 ft; O.D.: #1 (11½"). #2 (11½"). #3 (13¼"). #4 (2"). #5 (2½"). Shipping express only.

....Net 13.73

Model TL-62 ......Net 10.05 30-FT. MAST. Cansists of 3 sections. Nos. 1, 2, and 3. Height 30 feet. Shpg. wt., 26 lbs.

26 lbs. Model TL-61 ......Net 7.28 20-FT, MAST, Consists of 2 sections. Nos. 1 and 2. Height 20 feet, Shpg. wt., Miodel TL-60 ......Net 4.58


STEEL GUY WIRE Six stronds of Na. 20 high tensiled strength galvanized steel wire Far any guy opplication. An excellent buy WR-28-50 ft.roll(Shpg.wt., 1 ½ lbs.)Net.35 WR-29-100 ft.roll(Shpg.wt.2, lbs.) Net.59 WR-30-500 ft.roll(Shpg.wt.12 lbs.) Net 2.78

ZUB2<sup>1</sup>/4. All Angle Base and Raof Maunt. ALL ANGLE BASE Most papular swivel base mount in use taday. Works on any surface—flat, slant, peak or wall. Heavy gauge weather-pracefed steel. Takes any most up to 2<sup>1</sup>/<sub>4</sub>"
O.D. Camplete with hordware.

TS-37. List 3.05



### TRI-SET COUPLER







1.39 Stock No. WR-25-100 ft. ....

UNIVERSAL TV

TUBE "BRITENER"

WR-9-75 ft. length .Net 7.50 over 100 ft., per 100 ft. . Net 8.90 **NEW! TV TUBE** 

GRID TO CATHODE SHORT . LOW EMISSION

3.23

WR-8 - 50 ft. length .Net 5.00 WR-18 - 100 ft. length . Net 8.90

RESTORER LOCATES AND CORRECTS FOR


. COMBINATIONS OF ABOVE as directed on the instructions. For magnetic tubes and PARALLEL CIRCUITS only.

Renews brightness contrast.

MS-12 in lats of 10, each 79-sinaty.89



99¢



**ECONOMY** MOUNT

Net 1.59



1.39 COPPER CONDUCTORS per 100 ft. LO-LOSS POLYETHYLENE

High quality, low-loss lead-in far all TV and FM installations. Polyethylene di-electric-standard copper leads. Shpp. wt., 2 lbs. per 100 ft.



TS-170—in lots of 6 ... each 1.29

TV


TUBE



Absolutely no tools or soldering needed for installing this handy inexpensive tube rejuvenator. You simply attach two plugs as directed on the instructions. For magnetic tubes and PARALLEL CIRCUITS only.

### EUP 75% ON LAFAYETTE RADIO PARTS

### PORCELAIN CASED TUBULAR CAPACITORS



Greatest Condenser Value Ever Offered!

4.95

KIT NO. KI-51 List Value 16.00 2.75 SPECIAL NET

TESTED AT 3 TIMES WORKING VOLTAGE
EXCEPTIONALLY RESISTANT TO HIGH TEMPERATURES AND MOISTURE
SURPASSES PERFORMANCE OF MOLDED PLASTIC TUBULARS

new, they're different, and they're better! Now, at a price for less than that of ordinary plastic
lubulars, Ladayethe brings you, for every day service work, a condenser that was designed for
industrial applications. The case is of durable gleaming parcelain, a ceramic knewn for its high
of imperviousness to moisture and resistance to heart. The capacitor is of finest quality, lested
mose the rated valtage with much closer capacity felerance. It mointains its characteristics under
conditions of heat and humidity. It's mechanical construction is excellent, the leads are firmly
and and seeled — they won't twist or break off. We've selected the mest peopular values and put
to in two serviceman designed kits. Each condenser is plainly marked, Each value is mounted on
handy strips. All are conservatively rated at 600 DC working volts. See chart for contents of



#### HEAVY DUTY 10 AMP DPDT MOTOR SWITCH MOLDED PHENOLIC

METAL FACE PLATE



metal FACE PLATE
monship on this switch is of the best quality. Termine oversize, flow-free solder type which mokes for no-orc connections. Roled 10 Amps of 125 Vollate, its easily take the current surges of motor storting, 3/4" x 7/6" x 1". Bushing 7/16" dio., 3/4" long, bot 9 3/4" long. Shops. wt., 6 oz.

6 DPDT Taggle Switch.

Net .79

In lots of 10, Each .75



### MIDGET-BAKELITE

SPDT KNIFE SWITCH Overall size 1 1/6 " x 2 3/6". Shpg. wt... A a= SW-23 Shpg. wt., 6 oz. Net .12 ea. — 10 for .99

DPDT KNIFE SWITCH
Overall size 1 1/6" x 2 1/6". Shap, wt., 4 az.
SW-24
Net .19 Ea. — 10 for 1.75

#### INSULATED ALLIGATOR CLIP



Sturdy nickel-ploted bross jows with plostic insulated thumb rest and insulated borrel. Strong spring with hord bite. Solder lug connection. Overall length 2½". Shpg. wt., 4 oz. Supplied in Red and Block.

MS-451—Red Alligator Clip

Net Eo., 07
MS-452—Block Alligator Clip

20 for 1.17

### A FABULOUS BUY! GENUIME LRC and ALLEN-BRADLEY Resistor Kit

10% TOLERANCE

100 INSULATED RESISTORS



PLASTIC HINGED BOX!

with QUA

Lafayette leads the field with a genuine Allen Bradley and IRC ½ watt, 10% tolerance, molded resistor kit with a Transparent Plastic Utility Box (built in partitions) size: 8½ x 4½ x 1-3/16". The finest resistors on the market. Molded insulated composition resistors. Meet JAN-R-11 specifications, including sail weter, immersion and high hundrity tests.

Stock No. K1-23-Total 100 molded resistors with Transparent Plastic Case NET 4-50 100 TOTAL

(A) (C)

LAFAYETTE SPECIAL

2-CONDUCTOR PHONE PLUGS
STANDARD 2-CONDUCTOR PHONE PLUGS
Phone plugs for a wide variety of applications with
choice of handle sizes and materials. All sleeves fit

standard %" phane jacks.
FIG. A. SLIM PHONE PLUG Smooth bakelite handle.
Solder terminals with cable ctamp.
MS-453
Net .25 ea. — 10 for 2.15
FIG. B. BARREL PHONE PLUG Ribbed plastic barrel
handle. Screw terminals.

hondle. Screw terminals.

Net . 22 ea. — 10 for 1.90

FIG. C. SHIELDED SLIM PLUG Ribbed chromad metal hondle. Solder terminal with cable clamp.

Net . 29 ea. — 10 for 2.50

FIG D. PHONE TO PHONO PLUG ADAPTER Adapts from standard phone plug to RCA type phono plug.

Overall length 2½" x ½" diam.

Not . 39 ea. — 10 for 3.25

STANDARO PHONE LACKS FOR 1½".

STANDARO PHONE JACKS FOR "4" PLUGS
FIG. E. OPEN CIRCUIT JACK
Standard open circuit
phone jack, "4" bushing, "1" long. Camplete with
mounting hardware.

(E)

(8)



### LAFAYETTE METAL CASED OIL FILLED TUBULAR CAPACITORS



			NET		ACH
	CAP	SIZE		Lots of	Lots of
TYPE	MFD	DXL	SINGLE	10	100
C-800	.001	9/32 x 26/32"	.09	.81	7.00
C-801	.002	9/32 x 26/32"	.09	.81	7.00
C-802	.005	9/32 x 27/32"	.09	.81	7.00
C-803	.01	9/32 x 27/32"	.10	.90	7.90
C-804	.02	10/32 x 27/32"	.11	.99	8.50
C-805	.05	13/32 x 1"	.12	1.08	9.50
C-806	.1	15/32 x 17/16"	.14	1.26	11.40

NEW! sub-miniature

TRANSISTOR AUDIO TRANSFORMERS

Input, Output and Driver Transformers

A new series of miniature transformers for transistor and experimental miniature circuits. Ideal for miniature radio receivers, ampliflers, hearing aids, etc., using standard transistors. Incorporate special heat-treated high permeability magnetic cores and treated to resist corrosion. Designed for improved frequency response with low distortion. 3" color-coded leads. Average shpg.

Wt., 4 02.

TR-87 INPUT TRANSFORMER—Primary impedance 100,000 ohms; secondary 1000 ohms; DC resistance primary 1000 ohms;

TR-98 DRIFY TRANSFORMER—Primary impedance 10,000 ohms; secondary 2000 ohms, center-tapped. DC resistance of primary 240 ohms; secondary 60 ohms, center-tapped. Net .79
TR-99 OUTPUT TRANSFORMER—Primary impedance 500 ohms center-tapped; secondary 3.2 ohms. Primary DC resistance 42 ohms, center-tapped; secondary 0.7 ohms. Met .79

Only ½" x ½" x ½"

LAFAYETTE JUMBO

5-WAY BINDING POST

### HEAVY SHIELDED PHONE PLUGS



INSULATED **ALLIGATOR** TEST CLIPS WITH 6 FT. LEAD

Handy for quick connections. Plated brass alligator clip with insulated handles and 6 ft, of No. 22 stranded wire attached. Clip is 1/2r'' averall.

50 for 3.25 10 for .72 SINGLY, EACH .08

LAFAYETTE SPECIAL

BUDGET UNIVERSAL TEST LEAD KIT IN PLASTIC CASE

### PHONE PLUG TO PHONO JACK ADAPTER

Brass, nickel-plated adopter. Has standard phone jock on one end to take regular phone plug, and RCA-type phone plug on ather end. Has threaded bushing with nut and washer so can be ponel mounted if desired. Shpg. wt., 4 oz.

Net .52

### **Precision** VERNIER DIALS

ed with plastic prods and pin plugs which withstands

pin plugs which withstonds chipping or breaking. Textro flexible kinkless vinyl covered 60" red and block leads Prods are red and block 4" lang x 1/6" diameter. Supplied in pair of one red and ane black. railable with either pin or bonana plugs.

F-344 Test Leads With Banana Plugs Het .39

F-345 Test Leads With Pin Plugs

Precision planetary drive vernier dials with approximately 8 to 1 ratio. Mounts on panel surface and has accurately centered metal inserts for \( \frac{1}{2} \) shafts. Metal dials are brushed silver finish with deeply etched and black filled engaging to provide maximum legibility even under poor lighting conditions. Reads counterclockwise 0 to 100 in 180°. Uses tough scratch resistant for sure grip fluted molded knob and housing. Phosphor bronze and brass utilized for internal parts.

Shpg., wt. 8 or \$\frac{1}{2} \frac{1}{2} \f

F-348 36MM (11/2") Diameter Vernier Diaf, 13/16" from front to back

F-347 50 MM (2") Diameter Vernier Dial, 1" from front to back F-346 70MM (2"/4") Diameter Vernier Dial 11/4" from front to back





Ball handle S.P.S.T. taggle switch in molded bakelite case. Rated 3A-125 Yalts. Supplied with chrome metal on-off indicator plate and two mounting nuts. Bady size 11½" x ½" x ½" behind panel. Bushing 7/16 Diam., 7/16 Long. Shap. wt., 4 oz. SW-21 SPST Taggle Switch

Net .22

In lots of 10, Each .19



### PUSH BUTTON SWITCH

**HEAVY DUTY** 6 AMP **DPDT SWITCH** 324 A TERRIFIC BUY!

Heavy duty bot handle toggle switch in enclosed bakelite case — ideal for hundreds of applications. Raied 250V-3 amps or 125V-6 amps. Six solder lug terminals. Comes with chrome metal on-off indicator plate and mounting nuts. Switch bady 1½" x ½" x ½" behind panel, including terminals. Bushing 15/32" dio., 7/16" long. Bot handle ½" long. Shpp. wt., 6 az.

die ½" long, Shpg, wt., 6 oz. §**W-22 DPDT** Toggle Switch Net .32 In lots of 10, Eoch .29

This kit consists of color coded 4% a" long x % a" dia. red and black plostic handle pin prods with heovy duty 37" kinkless rubber leads with 5000 breokdown insulation terminoting in



HEAVY DUTY 6 AMP DPDT CENTER OFF TOGGLE SWITCH LAFAYETTE 49 SPECIAL!

Shpg. wt , B oz.

eavy-duty double-pole double-throw for control of light-g circuits, high power p.o. horns, electrical appliances of motors. Roled at 6 mps 125 volts AC or 3 mps 230 AC. Metal on-off indicator plate and mounting nuts-witch body 1.5/16" x ½" x 1" behind panel, including rminols. 7/16" bushing, 7/16" diam. ½" bot handle.

**HEAVY DUTY 10 AMP** SPDT CENTER OFF TOGGLE



This heavy duty switch is ideal for small size equipment. Heavy silvered lugs for law-loss connections. Roted 10 amps at 125 volts. Body size  $1\frac{1}{2}$ " x 9/16" x  $\frac{3}{4}$ " depth behind ponel. Bushing  $\frac{3}{4}$ " dia.,  $\frac{7}{16}$  long. But hondle  $\frac{3}{16}$  long. Shpg. wt., 4 az.

SW-27 SPDT Taggle Switch.

Net .39

In lots of 10, Each .35



### RUGGED TELEPHONE TYPE 4PDT LEVER SWITCH

ANOTHER LAFAYETTE BUY! 6



Accepts phone tip plug, a spade lug, a banana plug, an alligator clip and a strand of wire. Head non-temovable from stand. Molded plastic construction. For panels 1/16" to %" thick. In either fed or black color; specify.

pj.37—Shpg. wt., 8 oz. Net Ea. 254

Page 29



### LAST MINUTE LAFAYETTE BUYS!



### afayette's IMPORTED SLIDE RULES

NEW! DELUXE LOG LOG DUPLEX DECI-TRIG SLIDE RULE

Machine Engraved Graduations
 Saddle Leather Case
 25 Scales with 8 Log Log Scales
 40" Log Log Dec. Fractions
 Scale
 Extended Range Avoids "Going Off Scale"
 Extra P

Scale • Extended Range Avoids "Going Off Scale" • Extra P
Scole Simplifies Computations
Constructed of specially selected, laminated, non-hygroscopic bamboo.
This brand new 10" log log duplex trig stide rule is built for the most exacting demands and is a truly universal calculating instrument. Contains 25 scales in total. Has 8 Log Log Scales-40" Log Log Decland fraction scale. The need for the traublesome and-farend resetting of the slide is eliminated by the extensions of the C and D scales. Other scale arrangements also allow easier calculation of problems involving the value of trigonometric functions. The twin set of Log Log scales in four sections each runs from 1.001 to 100,000 and .999 to .00001, thereby enlarging the scale by one scale length each compared with ordinary log tog slide rules. Extra features include the P scale which enables easy computations of vector prablems involving twa sides af a right triangle. Scales include L101, L102, L103, DF, CF, CT, C, D, L3, L12, and L11, L100, L, K, A, B, S, ST, T, C, D, D1, P, and L10. Camplete with instruction book and saddle leather case. Overall length is 14". Shap. wt., 1½ lbs.

Net 15.95



-V\$300 TYPE Replaces the fol-

lowing batteries: 8urgess P6, P6M; RCA VS300, VS314; Eveready 226

BA-3 9 Valt Battery Reg. 1.23 Net, ea. .59 Lats of 10, ea. .53

671/2 VOLT
PORTABLE—
P45M TYPE
Replaces the following batteries:
Burgess P45, P45M;
RCA VS215, VS216,
VS218;
Eveready 477
BA-1
671/2 Volt Battery
Reg. 2.75 Net,
ea. 1.59
Lats of 10, ea. 1.49

9 VOLT TRANSISTOR

-206 TYPE
Replaces the following batteries:
Burgess 2U6; RCA
VS312;
Eveready 416
BA-2

9 Volt Battery
Reg. 2.75 Net,
ea. 1.59
Lats of 10, ea. 1.49

9 VOLT TRANSISTOR

-206 TYPE
PORTABLE—
UX45 TYPE
Replaces the following batteries:
Burgess UX45, RCA
VS318,
Eveready 416
BA-5

671/2 Volt Battery
Reg. 2.95 Net,
ea. 1.59
Lots of 10, ea. 1.19

Lots of 10, ea. 1.19

SLC

TRANSISTOR

-206 TYPE
PORTABLE—
VX45 TYPE
Replaces the following batteries:
Burgess UX45, RCA
VS016, Eveready 467
Eveready 416
BA-5

671/2 Volt Battery
Reg. 2.95 Net,
ea. 1.59
Lots of 10, ea. 1.19

Lots of 10, ea. 1.19

Lots of 10, ea. 1.19

and hobbyists, etc.

**Lafayette BATTERIES** 

These popular batteries are for Portable and Tran-

sistor radios, R/C equipment, experimenters, labs,

FRESH STOCK - BRAND NEW - GUARANTEED

-Here are three of the most popular types use<mark>d and at</mark>

RIDICITLOUSLY LOW PRICES

AT TREMENDOUS

### RECHARGEABLE FLASHLIGHT



NEEDS NO BATTERY
 ATTRACTIVE &

. EASY FLIP-ON SWITCH



### MINIATURE MUSIC BOX MOVEMENTS • PRECISION MOVING PARTS • MORE THAN 3-MINUTES

PLAYING TIME

RUGGEDLY BUILT BEAUTIFUL TONE

AULD LANG SYNE Net 1.88
HAPPY BIRTHDAY Net 1.88
HERE COMES THE BRIDE Net 1.88
BLUE DANUBE WALTZ Net 1.88

Here is an ideal, inexpensive code practice oscillator for the amateur radio enthusiast. Long 38 inch wire from oscillator to esciple, and weighs anly 6 oz. Oscillator case and key base are made of hondsome black plastic. All maving ports are durable metal, with both adjustable spring tension and contact clearance. Spade lug connectors are located on the key making it possible to disconnect the key from the oscillator and use it separately if desired. Earpiece is crystal type, and housed in sonitory plastic. The code practice oscillator comes complete with accillator, key, earpiece and bottery, and is ready for use. No extras are needed. Tone produced is clear and crisp, similar to that received during F.C.C. licensing examinations. Low voltage transistarized circuit utilized 1.5 valt penlight type bottery which completely eliminates ony possible shock hazard. Size: Oscillator 2½" x 2" x ½". Key 4½" x 1". Shpg. wt., 9 oz. F.479

TRANSISTORIZED CODE PRACTICE OSCILLATOR

#### LAFAYETTE PRISMATIC READER

### ROAST MEAT THERMOMETER

Take the guesswork aut of roasting. Rugged sensing probe plus meter movement tells you the correct temperature far roosting meot. The meter scale is divided into six sections marked Beef Rare, Tender Hom, Beef Medium, Beef Well-done, Lamb-Fresh Pork, and Paultry. Non-breakable plastic window affards easy reading. Naw, you can be sure your cooking is right. Shpg. Wt., 5 oz.

IMMERSION HEATER



### OIL FILLED METALLIZED PAPER CAPACITORS

PRICE IS RIGHT 
 EXCELLENT FOR BUILDING YOUR OWN CROSSOVER NETWORK
 SELF-HEALING TYPE

These oil filled metallized poper capocitors have the advantage that they are self healing. Even many breakdawns are harmless. Capacitance tolerance is  $\pm$  10% of roted capacity. Dielectric loss less than 10% at 20°C, measured at 1000 cps. Insulation resistance over 500 megahns between terminals. Overall dimension for 2  $\mu f$  capacitor is 1% x % x 1%". Overall dimension for 4 and 8  $\mu f$  capacitor are 1% x % x 2%" and 1% x ½ x 2%" respectively.

Stock No.	Cap. Mfd.	DCWV	Shpg. Wt.	Net Ea.
CF-114	2	150	3 oz.	.59
CF-115	4	150	5 oz.	.79
CF-116	8	150	8 oz.	1.19

COMMUNICATION RECEIVER TYPE KNOBS

### MINIATURE RCA METAL INSULATED **EXTENSION PLUGS & JACKS**



(A) Sturdy, heavy brass, nickel-ploted RCA phane plugs. Provide excellent shielding, Ideal to use in high fidelity music systems. Length—1-5/16". Shpg. wt., 4 az. Ms-593 ... Net .19
(B) Extension coble jack that matches MS-593 plug or any RCA phone plug. Shpg. wt., 4 az. Net .19

EXTENSION CABLE WITH MINIATURE

PHONE PLUG & ADAPTER

48" CITIZEN BAND TELESCOPING ANTENNA

Ideal for mobile or fixed transceivers, miniature portable and pocket transistor radios, and a host of similar applications. The 4 section antenno is made of chrome-ploted brass and plugs into a jock. Measures 48" fully extended and retracted is 11" to facilitate carrying in pocket. Complete with a flexible plastic case with slip-under protecting flap. Shpg. wt., 8 az.

Net .79





Nickel plated bross type for low resistance Quality springs mointain positive action. Pro-vided with rubber insulation. Shpg. wt., 2 oz.

### **4PDT ROTARY SWITCHES**

Molded of top-quality Tenite, and have easy-grip knurl-ing. These knobs are 1-7/16" in over-all diameter with chrome-plated bevel skirts for attractive oppearance. De-pressed numerals are black enamelled on chrome plate.

.34 each .29 each in Lots of 6

New three-position rotary selector switch can be used in hi-fi preomps and stereo applications. %" diameter, and 1%" shaft length. Quality construction with positive oction. Shpg. wt., 6 az.

SW-30 Net .30



NEW AMPHIBIOUS FLASHLIGHT Outstanding new all purpose floshlight which is water-proof and gas light. Can be used under water or in the rain. Ideal for use in comping and warking autside at night. On-Off Switch is of back handle type. Powerful light beom provided by two cells. Complete with nylon shoulder band. Shpg. wt., 1 lb. F-434 Net 2.95

### ADJUSTABLE CURVE





FILAMENT CONTINUITY TURF CHECKER



TS-282-List 4.90



### RCA SELENIUM RECTIFIERS

BRAND NEW FRESH STOCK - STOCK UP AT THESE FANTASTIC PRICES! TYPES MAY BE ASSORTED FOR QUANTITY PRICES!

	AII I	carea	1304	. AC.	
RCA NO.	MA.	LIST PRICE		EACH LOTS OF 10	LOTS OF 100
201G1 207G1 208G1 202G1	150 200 250 300	1.60 2.20 2.30 2.50	.50 .55 .60 64	.40 .50 .52	.36 .45 .49 .49



### UNIVERSAL 6 & 12 VOLT VIBRATORS

Direct replacements for most popularly-used types. All brand new factory-fresh stock. Made by leading national manufacturers, Fully guaranteed. Shpg. wt., 1/2 lb.

Price Schedule

AS LOW AS 95: Replaces Mailary 294, 859, 901M; Radiart 5300, 5301; and many others.

STOCK NO. MS-127 12-VOLT 3-PRONG
Replaces Buick, Olds, Pontlac and GM part no.
1220155; Mallory G874, CD 6330, Delco 8550; and
Vakar 3129.
1.19
STOCK NO. MS-128 12-VOLT 4-PRONG
1.09 Replaces Mallory G859, Motorola 488522000, Philics
.99 and Mapare 83-0025-1, ATR 1340, Vokar 4124; and
.95 mast later 12-volt car-radio vibrators.



### **RCA YOKES**

AS LOW AS 95¢ YOKES MAY BE ASSORTED FOR QUANTITY PRICES

RCA NO.	HOR.	RESISTANCE VERT.	MAX. ANGLE	PRICE	SINGLY	LOTS OF S
201D12	8.3	64.6	57°	9.00	1.05	.95
237D1†	12	42	90°	10.00	1.75	1.75
205D1	12.5	68.8	57°	10.00	1.10	.99

Supplied with damping and neutralizing elements.

### Tor Domestic, MOTOROLA

### 10% DOWN! MOTOROLA AUTOMOBILE SETS TRIM PLATES

UNIVERSAL MANUAL TUNING AUTO RADIOS WITH EXTERNAL OVAL PM SPEAKER



MODEL 8MX

TRANSISTOR POWERED

Similar to above, but with 5 tubes and rectifier, no transistar, and 5" x 7" external speaker. Far 6 valt MOTOROLA 8M

For neat in-dash instal lations

in domestic cars. Specify make, year and model when ordering. MAKE YEAR
54 thru 59
53 thru 59

7	CHEVROLET-GMC TRUCK	55 thru 59
	EDSEL	58-59
Any type	NASH RAMBLER	57 thru .5"
	PLYMOUTH	53 thr , 59
4.35	PONTIAC	57 thru 59
	STUDEBAKER HAWK	55 thru 59

FOR TRIM PLATES FOR SPORTS AND FOREIGN CARS SEE CHART

CHEVROLET

### Sports & Foreign Cars For Boats & Trucks

### CONSULT THIS CHART TO DETERMINE WHICH SETS FIT SPORTS CARS AND FOREIGN CARS

This chart shows a choice of sets to fit the electrical system of your car, the type of installation, and if trim plate is required. An X in the column headed "TRIM-PLATE" indicates an accessory plate is required. In column headed "TYPE INST."

A OR E = IN DASH, B = UNDERDASH, C = AGAINST FRONT DOOR, D=THROUGH GLOVE COMPARTMENT DOOR. \*=Dash requires simple alteration.

CAR MAKE AND MODEL	USE	TRIM	TYPE	MAKE AND MODEL	USE	TRIM PLATE	
Alfa Romeo 1956-58	300X 600X	X	Å.	Mercedes Benz 1957-58	X00X X000 XM8	X	× × ×
Arnolt Bristol 1955-58	301 X 600 X	х	A*	Mercedes Benz 1958	300X 600X	×	B A D
Austin 1956-58	301X 600X	х	B	M.G.A. 1955-58	301X 600X	x	À:
BMW 1957-58 (Isetto 300)	300X	X	CC	M.G. Mognette 1957-58	301 X 600 X		B A*
BMW 1958 (Isetta 600)	300X		C.	Morris Minor 1956-58	301X 600X	x	B
Borgward 1957-58	8M 406	X	Ē	Opel "Rekord" 1958	406	X	E
Bristol 1957-58	301 X 600X		B A*	Panhard 1957-58	300X 8MX 600X	X	À:
Citroen (1D-19) 1956-58 Citroen (DS-19) 1958	406 8M 406	X	D D	Porsche "1600" 1957-58	406 VWA7	×	À:
D.K.W, 1956-58	406 VWA7	x	A	Porsche 1956-57	406 VWA7	X	À:
ENGLISH FORDS Squire-Zephyr 1957-58	301X		В	Renault Dauphine 1956-58	406 VWA7 8M	×	¥:
Zodioc-Cansul 1957-58 Gogamobil 1958	300X 600X	X	<b>^:</b>	Renault 4 CV 1956-58	406 VWA7 8M	×	<b>À</b> :
	8MX	X	A*	Rover 1958 "1055"	301X	Х	D
Hillmon Minx 1955-58	901X	X	B	Triumph 1955-58	301X 600X	X	B
Hillman Husky 1955-58	301X 600X	x	В	Triumph Sedan 1955-57	900X	x	B
Jaguar (all) 1950-57	301 X 600 X	x	B	Vaux Hall 1958	301 X 600 X	X	E.
Jaguar (1958)	301 X 600 X	X	B A	Volkswagen 1953-57	406 8M	X	4.
Joguar (Mark VIII) 1958	301 X	x	B	Volkswagen 1958	406	X	Ÿ.
Lloyd 1957	406	X	B	#1	8M VWAS	3	A
Mercedes Benz 1955-58	300 X	^	A*		VWA7	-	- <del> </del> ^.
Mercedes Benz 1955-57	300X 8MX 600X	X	\$:	Volkswagen Ghio 1955-58 Volkswagen 1955-58	8M 8M	X	A
Mercedes Benz 1955-58	300X	X	A.	Micro	VWA	7	A
	600X 8MX	x	Ÿ.	Volvo 1957-58	406 8M	X	

### BUICK - CHEVROLET - OLDSMOBILE - PONTIAC - VOLKSWAGEN



SPECIAL CUSTOM SERIES TRANSISTOR POWERED

- PUSH BUTTON TUNING CUSTOM FITTED TO EACH CAR

Specifically designed to custom fit your car with simplest installation. Sensitive transistor powered circuit uses 5 tubes plus rectifier. Heavy duty 6" x 9" PM speaker, autamatic volume cantral, and tone control. Low battery drain. For 12-volt operation. Shpg. wt., 10 lbs.

Low battery drain. For 12-voti operation.

10 lbs.

CTACX — For Chevrolet 55-56

CTATX — For Chevrolet 57

CTABX — For Chevrolet 58

CTA9X — For Chevrolet 58

CTA9X — For Chevrolet 59

BKA6X — For Buick 56

BKA7X — For Buick 57-58

BKA9X — For Buick 57-58

BKA9X — For Buick 59

CEATX — For Oldsmobile 57-58

OEA9X — For Oldsmobile 59

PCA7X — For Pontioc 57-58

PCA9X — For Pontioc 57-58

VWA7\* — For Volkswagen 53 thru 59

\*Not transistorized — For 6 volts only. EACH 59.95

ONLY \$6.00 DOWN - 10 MONTHS TO PAY!

SPORTS, TRUCKS, BOATS REG. VALUE



ONLY \$49.80

- \$5.00 DOWN \$5.00 MONTHLY

\$5.00 DOWN — \$5.00 MONTHLY

TRANSISTOR-POWERED CHASSIS

NO VIBRATOR-NO VIBRATOR NOISE

REVERSIBLE POLARITY PLUG

FOR NEW CARS, OLDER CARS, FOREIGN CARS,

TRUCKS, BOATS

A really universal cor radio for all types of cors or backs.

A really universal cor radio for all types of cors or backs.

With 12 volt electrical systems. Small—measures only 6½",

with 12 volt electrical systems. Small—measures only 6½",

with 12 volt electrical systems. Small—measures only 6½",

with 12 volt electrical systems. Small—sessive or rego.

(by simply rotating o plug) for cars with positive or nego.

(by simply rotating o plug) for cars with positive or nego.

tive grounds. Includes 5 miniature tubes plus a power

tive grounds. Includes 5 miniature tubes plus a power

tive grounds. Includes 5 miniature tubes plus a power

constant. S" x 7" heavy-mognet speaker for excellent tone

constant. S" x 7" heavy-mognet speaker for excellent tone

constant. S" x 7" heavy-mognet speaker for excellent tone

constant. S" x 7" heavy-mognet speaker for excellent tone

constant. Sitt implates. Mounts by simply drilling 3

rich chrome finish frim plate. Mounts by simply drilling 3

mall holes. Styling fits into ony interior for o custom

small holes. Styling fits into ony interior for o custom

small holes. Styling fits into ony interior for o custom

small holes. Styling fits into ony interior for o custom

small holes. Styling fits into ony interior for o custom

small holes. Styling fits into ony interior for o custom

FOR TRIM PLATES FOR SPORTS AND FOREIGN CARS SEE CHART ANY TYPE .......4.35

### MOTOROLA SPORTS CAR NEW! MOTOROLA TRANSISTOR MANUA TRANSISTOR MANUAL RADIO FOR 12 VOLT



\*FITS MOST CARS, SPORTS CARS, BOATS AND TRUCKS

Extremely compact and efficient set for in-dash or under dash mounting in most cors as well as for under dash mounting in most cors as well as for under dash mounting in most cors as well as for under dash mounting in most cors as well as for under dash mounting to the with 3 tubes nod 2 transistars, automatic volume with 3 tubes nod 2 transistars, automatic volume with 3 tubes nod 2 transistars, automatic volume with 3.5" Colden Voice speaker, noise elimination circuit and extremely low battery drain. Size ing circuit and extremely low battery drain. Size in the circuit and circuit and

ground MODEL 301X for instellations with positive 37.20

FOR 6 VOLT SYSTEMS Similar to 300X, but hos 4 tubes and 2 transistors and is far 6 volt systems. Less trim plate. Shpg. wt 6 lbs.

Net 37.20 TRIMPLATES FOR ABOVE
LARGE TRIMPLATE FOR UNDER DASH
SMALL TRIMPLATE FOR IN DASH

CUSTOM TRIMPLATE TYPE E CONSULT CHART FOR TRIM PLATES AND IN STALLATION IN FOREIGN AND SPORTS CARS.

### HI-FI REAR SEAT AUTO SPEAKER KITS





FEATURING 6x9 COAXIAL
SPEAKER WITH TWIN TWEETERS

Add Hi-Fi Listening to Your Car Identical to SK-37 outo speaker kit shown on this page except has hi-fi 6" x 9" coax speaker instead of single-cone unit. Excellent for music lover who wants quality reproduction. Specify chrome or gold grille. Shpg wt., 6 lbs.

FADER TYPE AUTO KIT

Cooxial speaker kit (same as SK.77) with toper for textible control at both front seat and rear speakers and sound balancing. Specify chrome or gold grille. Shpg. wt., 6 lbs.

### TRANSISTOR POWER 'PHONE 2-Station Telephone System



ONLY

29.95 PER PAIR

### Lafayette Leads Again With This


MUNICATIONI

A revolutionary new development in telephane intercommunication, at extremely low cost, has been brought to you by Lafayette in these new transistorized telephane handsets. Each handset is complete with its own transistor amplifier, buzzer, press to-talk pushbutton switch, buzzer pushbutton switch, and shielded cailed cord (extendable to 6'1) with male and female connectors ready to cannect to 2-wire coble. Each handset is handsomely styled in heavy, high import resistance, moulded plastic and provided with a metal loop for hanging on the side of a desk, etc. To call, simply press the ted buzzer button and listen. Your party just depresses his press to-talk button to talk, releases to listen. Voice cames through loud and clear, with a high degree of intelligibility. All stations are connected to the same 2-wire cable, and good signals can be received up to 125 miles with #22 wire! No external power supply or battery are required—everything is self-contained in each handset, and any numaco of handset; can be utilized. Buzzer lane is screwdriver-adjustance.

a. of handsets can be utilized. "Descer tone is screwdriver-odjustoble. Service is extremely simple, and battery replacement (o single
'Z' cell is used) needs no tools of all! TECHNICAL SPECIFICATIONS: AMPLIFIER CURRENT—0.2 to
0.4 mo. overage; 8UZZER CURRENT—60 to 90 mo.; IMPEDANCE (INPUT AND OUTPUT)—600 ohms; OUTPUT
VOLTAGE—opprox. 2.44V. moxi; POWER OUTPUT—10 mw. (opprox. +10 db.) mox.; MINIMUM POWER
IMPUT (SENSITIVITY) = 0.002 mw. (opprox. -27 db.); MAXIMUM (INE ATTENUATION —35 db. (0.175
db./km.); DISTANCE FOR COMMUNICATION—200 km. (125 miles); 8UZZER FREQUENCY—400 cps.;
BUZZER OUTPUT POWER—60 mw.; OPERATING TEMPERATURE—50° C. mox.; POWER SUPPLY—Burgess "Z"
or RCA VSO34 battery cell. SHIPPING WEIGHT (PER PAIR); 3/1; lbs.

Net 29.95

PA-8-2-Station Transistor Telephone System (2 units)

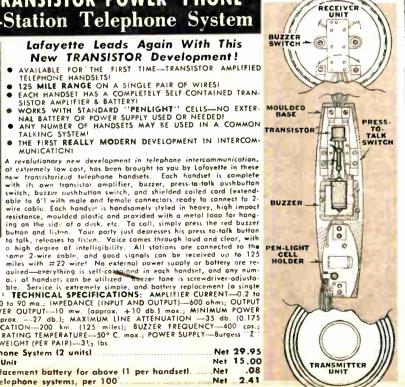

### REAR SEAT AUTO SPFAKER KITS



adding second speaker in rear of your car. Includes a 6" x 9" PM on selector switch for cutting in front, rear, or both speakers; dial ting bracket, knob, and hordware; chrome or gold grille; wire; ond s. Simple to install. Shpg. wt., 5 lbs.

5K-94 Speaker kit (specify chrome or gold grille)

### DELUXE 6" x 9" KIT with 2.15 oz. ALNICO V MAGNET Same as above but with deluxe speaker with extra-heavy Alnica V magnet (2.15 az.). This is same speaker used in kits selling at twice the price. Shpg. wt., 5 lbs.

5K-37 Speaker kir (specify chrome or gold grille).

5K-42 Same as SK-94 but with 5" x 7" speaker and grille (specify chrome or gold)

### FADER TYPE AUTO KITS

Rear-seat speaker kits identical to those above except with foder-type cantrols to cut either speaker in arout or balance both. Shpg. wt., 5 lbs. Specify chrome or gold grille.

SK-\$5 5" x 7" kit. Same as SK-42 but with fader control, SK-95 6", x 9" kit. Same as SK-94 but with fader control.


DELUXE 6" x 9" FADER KIT

Deluxe kit with extro-neavy-magnet 6" x 9" speaker, plus foder control. Specify

chrome or gold grille.

SK-56 6" x 9" kit. Same as SK-37 but with foder

### afayette's Breaking D. Summer Tool Sale **Breaking Records for Savings**



### FLEXIBLE SHAFT ATTACHMENT FOR ELECTRIC DRILLS

- ORILL WHEREVER
- YOU WILL TAKES UP TO

1/8" SIZE DRILLS

Operates off any fixed or partable ¼" power drill; en-ables you to drill at any angle anywhere. Capacity up to ¼" size drills; 36" averall length, with chuck Cames in box with complete instructions. Shpg wt., 1 lb.

#### HANDY WARDING FILE SET



A A INDIVIDUAL FILES . SPECIAL STEEL-DEEP CUT-HARDWOOD HANDLES

#### WATCHMAKERS PRECISION SCREWDRIVER SET

screwdivers with nickel-plated knurled handles, swivel heads and tem-pered steel blades. One each from No. 0 to 5— blade sizes: .025" to .100". In plastic kit. Shpg. wt., 3 oz. HD-444. Net .69



### Multi-Use WRENCH SET





### 7-PIECE SUPER NUT-DRIVER SET .99





#### JACOBS TYPE DRILL CHUCK

Comparable to Jacobs 18.
Key type geared tooth chuck.
Capacity 0.½", thread ½" x

Polished finish. Used as standard equipment on most electric drills. Mode to rigid specifications. Campare our really low price. You'll find this same chuck selling for twice as much! Shpg. wt., 1 lb.

HD-186



#### WOODWORKERS VISE

• 61/2" x 31/2" JAWS
• OPENS TO 41/2"

A fine, practical tool for the small shap-home-farm or garage. Ruggedly built — will not loosen or slip. Guides of finely machined cold rolled steel. Gray iran jaws— s ground and finished. "" diameter screw—6 thread inch. Saves time and lobor—indispensable to the idworker. Perfectly bolanced—designed for hard use. 19. wt., 6 lbs.



#### SWIVEL CLAMP-ON BENCH VISE

Constructed of high grade cast steel. 2½" machined and polished steel jaws open to 2½". Twin guide rads keep jaws aligned. Easy-turn swivel base allows unit to be swung instantly to any desired position. Shpg. wt., 3½ lbs.

MD-107 Net 1.99



### HAND TAP SET

- · AMERICAN STANDARD
- MOST NEEDED SIZES
   RUGGED TAP WRENCH

andy top set includes most aften used sizes. Consists 6-32, 8-32, 10-32, 3/16-24, and 1/4-20 tops, rugged by wrench with T-bor handle; all in heavy plastic pouch. I threads are American Standard, Extremely useful for pair and servicemen, Shpg. wt., 1 lb.

HD-410.

### Vinyl Insulated "PROFESSIONAL" Pliers



Chrome Plated

Tested Beyond Professional

Professional quality—heavy duty—forged from special heat treated, alloy steel. Chrome plated to resist rust. Insulated with fitted, vinyl, non-slit handle grips—protects up to 10,000 volts. Hand honed cutting edges. Machine milled teeth. Handles shoped for easy grip and maximum leverage. Short fulcrum distance fai greater gripping power. Unconditionally guaranteed by Lafayette. Average Shops. wt., 10 az.

HD-350 6" Diagonal cutter-wire stripper
HD-351 6" Long nose-side cutter-wire stripper
HD-353 6" Electronic oblique cutter-wire stripper
HD-353 6" Long chain nose-side cutter-gripper
HD-354 7" Linesman's side cutters-beveled nose

**5** 1.69 7 in 1 HOLE SAW

Fits any electric drill, drill press, motor arbor, rotory sonder or lothe. Cyclindrical sow blades cut holes from 1" to 2½" diometer in any ½" stock. Hole sizes are 1" 1½", 1½", 1½", 1½", 2", 2½", 2½", True size corbon steel sow des fit into deep machined grooves in tool head and lacked into place by a full length lock screw. Cuts od, plastics, metals, sheet-rock, wall-board, masonite, nico, etc. Hos guide bit and automatic slug ejector. poing vt., 1½ ibs.



PC. SCREW EXTRACTOR SET

FOR 1/8" TO 1/4" SCREWS

Five piece, chrome vanodium, screw extractor set. Removes broken and mutilated screw—botts—studs, even 1/8" and 1/4" pipe. Simply drill damaged screw-twist extractor in—and back screw out. Set consists of 5 extractors in wooden case. Shpg. wt., 1 lb.

HD-273


Net 1.59

1/2" CHUCK FOR 1/4" DRILLS



nverts 1/4" electric drill to 1/4" capacity. Praperly chined to insure correct balance. May also be used standard 1/2 x 24 mater arbor as shaft. Shaps, wt., 1 lb. 1-203.

### **NEW! PRUNING SAW**



Net 1.97 Net .83 Net 1.35

#### "RUBBERGRIP" SCREWDRIVER SET

• 4 Most Needed Screwdrivers
• Rubbergrip for Comfort and Tarque

Rubber inlaid handles grant maximum comfort and maximum tarque. Con't bite into your hands na mother how hord you grip and turn. Extra "Lift" improves bolance. Blades are hardened and tempered. Plated to resist corrosian. Set conions 5" x 3/16 and 6" x ½ standard drivers plus 3" x 3/16 #1 and 4" x ½ #2 recessed drivers. Shpg. wt., 1 lb.



S PC.
ASSORTED 98.

Five files selected for utility and durability. Good quality—equal to tiles selling for far more. Each one a different pattern — three standard shapes — two triangular, Sizes 6" to 12". Shpg. wt., 2 lbs.

### "Tri-Y" Screwdriver Set



HD-457 Set of 2

rugged, amberaid plus-tic. Shpg. Wt., 2 lbs. Net .98

25 Camper's Hand Axe

Top quality, drap forged steel, ane piece scaut oxe. Perfectly balanced. Ro-curved, shack absorbing handle. Air-cushioned rubber grip. Fully polished head and shaft, 24 oz. weight, 13½" overall. With nail-puller. Fine steel can be shorpened to a "shaving" edge. Shpg. Wt., 2 lbs. HD-461 ... Net 1.95

#### WIRE STRIPPER-CUTTER

• Insulated Plandles


Tempered steel—hondy—easy to use wire stripper. Powl cam lock sets to wire gauge. Designed to fit your grip—uses minimum pressure. Specially ground cutting edges. Cuts and strips at any point along wire. For service or light production work. Shpg. wt., ½ lb.

No. 50




1.20 CUTTER

13 PC. TWIST DRILL SET



Set of 13 high quali 8 oz. HD-113 ..Net 1.29



### ROTARY RASP

## 3-Way Combo 98

### **NEW! GLO-BRITE KRYLON**

- . FLUORESCENT COLOR SPRAY!
- . GLOWS IN DAYLITER

For sure, quick attention. Makes any white surface up to 4 times brighter—easier to see. Gives nean effect under black light. For do-it-yourselfers, display men, hunters, fishermen, campers, etc. Use on fishing lures, boat markings, life preservers, torgets, auto bumpers, signs, displays, bicycles, etc. Numbers 3101 and 3102 are made spec. MIL-P-21600 (AER). Used for aircroft wing tip and rudder markings, 16 az. push button cons.



KRYLON #


COLOR

### LIGHT WEIGHT LONG NOSE PLIER



Ideal for all types of delicate work and for reaching into hard-to get-or places. Spring closing—holds wires, nuts, screws etc. Handy for mechanics, assemblers, hobbyists. 8%" long, with soft plastic colored handles. Shpg. wt.,

### LOCKING PLI-RENCH



1.20

#### 20 PC. AUTO SOCKET SET



Ideal for outo or home. Contains 8 regular 12-point sockets—7/16", "y", 9/16", "y", 11/16", "y", "y", and 15/16"; "y" drive hex. L hondle, 1 rother hondle, 1 screwdriver adapter, also 7 ignition sockets—"y", 5/16", 11/32", "y", 7/16", y", and "y" internal knurled socket; "y" drive hex. L hondle. All parts are properly heat treated and nickel-plated. Mounted in red wall brocket. Shpg. wt., 3 lbs.

10. 3 lbs.

10. Net 2.79

#### 20-PIECE TAP AND DIE SET NATIONAL COARSE SIZES

when the following sizes of 22, 8-32 10-24, 12-24, 1/4-20, 5/16-18, 1/6-14, and 1/2-13, includes die stock and adjustable top wench. Entire set contained in a fitted metal case. Shep. wt. 4 1bs.

### The "ULTRA" Electro-Tool Kit



- Designed with the Technician in mind
- Professional **Quality Throughout**

The finest-most compact carefully selected tool kit we have ever offered Each component tool chosen to offer utility and quality. The "ULTRA" kit contains the following: 5 ½ insulated cides cutters, 5" insulated chrome ploted diaconals, 6' insulated chrome ploted diaconals, 6' insulated chrome ploted by the following iron, 3 offset open-end wrenches covering fram ½" to ½", 5" chrome ploted tweeters, shockproof amberoid chuck handle, 3/32nd strew driver blade, 5/32nd strewdriver blade, punch-owl blades, ½" nut driver blade, solder and flux. Pliers insulated for 10,000 volts, handh haned cutting edges, Side cutters have beveled nose, diagonals have provision for wire stripping, long nose has "wrench" grip jaws and cutters. The entire set is nested in a tippered, fitted, lined book type carrying cose with handle. Measures a scont 9" x 5" x 2". Shpg, wt., 2½ lbs.

### Ratchet Head SOCKETOOL



Ratchet Head SOCKETOOL

2.25

Amozingly versatilel Handles carriage bolts, machine bolts, logs screws, sheet metal screws, machine screws, was screws, coperates in straight or offset position—handly for hard-to-reach places. Universal ratched head works right, left or lacks—speads and simplifies any job! Contains Shelton suregrip ratchet handle; straight hex adapter; offset hex adapter; 5 hex sockets—7/16", ½", 5/16"; tool steel screwdriver bit for slatted screws; tool steel screwdriver bit for recessed head (Phillips) screws. A fine small tool set, ruggedly constructed tool hard usage. Complete in durable plastic case. Shpg. wt., 1 lb.



Camprises 5 tools which compactly fold into one, "Disgarger"—backs-out hard-to-reach hooks; "Stilleto"—
cleans and removes leaders from fly hook eyes; "Clipper"
—cus-lines, leaders and trims flies and lures; "Screwdriver" and "Bottle-and-Can opener" are also included
in this rugged and versatile tool.

HD-452

Net 1.59

"Little Smith" Anvil



"Little Smith" is the perfect componion for the hobbyist-tinkerer-model maker-ar just plain foolin" arounder. Meas-


SCREW-MATIC 3.97



Con be fitted to any fixed or portable drill, to drive up to "diameter wood screws quickly "non-slip" industrial-type clutch disengages itself when screw is driven home. Special bit holder prevents bit from slipping out of screw slot, Includes two hordened tool steel ""hon bits for No. 2 Phillips head and for No. 6 to No. 14 slatted screws. Shpg. wt., 1½ lbs.

### VALUES for HOME or SHOP

### WEN 'SOUPED UP' SABRE SAW



HEAVY DUTY - full 6 Amp.

1/2 H.P. Motor - 1" Stroke

LARGEST CUTTING CAPACITY 6" 90° Cut-4" 45° Cut

LIST PRICE 44.95

Bigger—more powerful—more versotile—foster cutting. Super-long blade easily cuts through 6" x 6" lumber. Cuts 4" x 4" at a 45° angle! Power enough to cut steel plate up to 3" thick—iron pipe up to 2" in diameter. Comfortable—conventional saw grip with auxiliary knob for 2 hand control. Saw tilts 45°—sole plate always remains flat. Finger control trigger-switch. Hardened gears and heavy duty roller and oil to bearings. Constant air stream flows dust from line of cut. 3400 strokes per min., stroke length. Includes seven blades for cutting wood—steel—hardboard—sheet metal—pipe—leather—rubber—formica—etc. Rough cuts or fine scroll work. Equipped with rip guide and circle cutter guide, 8 ft. 3 cond cord and adapter. 110 volts, 6 amp., AC-DC. 8" L x 7" W x 7½" H. Shpg. wt., 8½ lbs.

WEN 909 List 44.95

Extra Blades for WEN 909: Set of seven replacement blades. Shpg. wt., ½ lb. WEN 900 List 3.40

Net 2.33


### THOR SPEEDWAY "20" 1/4" DRILL

- BALL THRUST BEARINGS
- GEARED CHUCK AND KEY
- HELICAL CUT GEARS
- UL APPROVED

12.95 Husky-Low cost 1/4" geared chuck drill rated at a full 2.5 amps. Preferred and used by professional mechanics for many years. Built for continuous production on wood or metal. Powerful, UL approved, universal motar. 1/4" capacity in steel, 1/4" in hardwood. Ball and self lubricating branze bearings throughout. No load speed 2400 RPM. Strong, lightweight, cast aluminum alloy housing. Specially designed gear chain for greatest torque. Locking Trigger switch. Backed by Lafayette's famaus Maney Back Guarantee. Sppg. wt., 5½ lbs.
THOR SPEEDWAY "20"—List 18.95 Net 12.95

THOR SPEEDWAY "20"-List 18.95

### **NEW! Electrostrip OUTLET** SYSTEM



SPEEDWAY "30"

3/8" DRILL



- Every Inch an Outlet! Mounts anywhere autckly- eosily!
- No breaking into wallst

Add outlets-move outlets— at will!

THOR SPEEDWAY **NEW! THOR** "14"SANDER

Here's Our Hot Sander Special



PROFESSIONAL PÉRFORMANCE! MOTOR DRIVEN -3450 RPM! SANDS-SMOOTHS

BUFFS-POLISHES-RUBS! USE SHEET OR FREE (WET)

**ABRASIVES!** 

Get this new tap quality sonder for all sanding uses, Here's an orbital motion, motor driven finishing sander (no load speed . . . 3450 RPM) that sonds, smooths, buffs, polishes, or rubs with both sheet obrasives or wet (free) abrosives. Sonding area—4½" x 5½". Features all sealed ball bearings; direct-connected air-cooled motor. Rugged blue hammerloid cast aluminum body. Hondy switch prevents accidental starting. UL appraved. Use on 110-120V 60 cycle AC only. Shpg. wt., 7 lbs.

HOK	14 —List 23.95Net	15.50
THOR	3509—Lambswool palishing padNet	.85
THOR	5-106-18 sheets assorted sandpaperNet	.85
_		_

16.95

RATED FULL 3.1 AMPS!

AND INSTALLATION.

3/4" JACOBS GEARED CHUCK

THOR SPEEDWAY "30"-List 24.95

DRIVES HOLE SAWS UP TO 21/2 INCH

More power for service work—production lines—mechanics—or anyone requiring an extra heavy duty %" drill. %" capacity in steel—"%" in hardwood. Sealed radial thrust ball bearing—other bearings cilite. 925 rpm no load speed, 610 rpm full load speed. Die-cast housing, steel gears, and specially reinforced construction assure long life. Trigger switch with locking pin. 6 ft. type SL UL approved card, universal series wound AC-DC motor. For 110-120 volts, AC/DC. Overall length 8½". Shpg. wt., 6 lbs.

THOR SPEEDWAY

6.5 Amp. 1/2" DRILL

DESIGNED FOR MAINTENANCE

HEAVY DUTY

NEW Weller **Dual Heat** 

Instant switching to high or low heat. Soves time — longer tip life. Instant heating clear to the tip. Prefocused spotlight illuminates work. Guaranteed for one year. Kit includes dual heat, 90-125 wats soldering gun—solder—wire brush—soldering aid. U.t. opproved. 110-120 V. AC only. Shpg.

### ADEL Hand "Nibbling" Tool

Cuts any shape or opening by hand
 in sheet steel up to 18 gauge — in soft metals up to 1/16" thick.

## NEW MODEL 4100 VERSAMATIC

- WITH YANKEE STYLE BIT HOLDER
- TURNS 1/4" DRILL INTO HIGH POWER
- REVERSES-INCREASES POWER-

REPUESS—INCREASES POWER—
REDUCES SPEED

Seven to one speed reduction develops framendous torquel Hand clutch cantral for easy, instant step-stert oction! Look at these fabulans features! Power screw driver—handles largest screws—reverses to extract them! Power drill tapping head! Plenty of power for oversize drilling! Perfect for concrete er ony kind of maionry drilling! Law speed and high power for hole saw ottechments! A prefessional tool that onyone can use! Comes complete with screwdriver bit—Phillips bit—V<sub>4</sub> socket set adapter-wrench pin and instruction book. Shop. wt., 5 lbs.

.... LIST 14.85 ......Ner 11.25 HD-195 ...

1/2" CHUCK FOR VERSAMATIC

Geared chuck-5/64" to V<sub>2</sub>" capacity—#33 toper to fit Supreme Versomotic. Shpg. wt., V<sub>2</sub> lb. ..Net 7.38 HD-268



### VINYL PLASTIC ELECTRICAL TAPE

- GUARANTEED FIRST GRADE

45¢ • 60 FT. x 1/4" • .008 in. THICK • 10,900 V. BREAKDOWN LOTS OF 24

First quality, pressure sensitive polyvinyl chloride tape. Extremely high dielectric strength of 10,900V breakdown. Insulation resistance of one millian megohms. Over 150% elongotion at break. Excellent resistance against acids, tolkolis, oils, soll water, etc. Tensile strength of 15 lbs. per in. High conformability: Forms tight, smooth protective wrap. Shpg. wt., 6 oz.

HD-216—Plostic electrical tape, 60¢ per roll; in lots of 6, 50¢ per roll; in lots of 24, 45¢ per roll.



#### "VILLAGE **BLACKSMITH"** ANVIL

Here is workbench ome size onvil. 8" long, 376," high ond 3" wide bose, Finds hundreds of uses in metal wark, woodleotherwork, etc. Exclusively built far the home men, habbyists ond formers. Shpg. wt., 8 lbs.

### Cordomatic HANDY LITE MEM FOM



Portable light and power
 Locks at any length of 20 ft.
 Retracts automatically

Provides light and power up to 20 feet fram installation. Swivels 180° when wall mounted—360° rotation when ceiling mounted. Detaches easily to nge location. Simply hang it up and plug it in. minotes the inconvenience and hozards of tangled ds. U.L. approved. Shpg. wt., 5 lbs.

CORDOMATIC EXTENSION CABLE. Similar to obove, except terminates with a 3-way power tap instead of high fixture. Extremely versatile—use indoors or aut. U.L. opproved. Shpg. wt., 41/2 lbs.



5.83

wt., 3 lbs. Weller 8200K List 7.95 ....Net 5.83




### • Full 6.5 Amp. Power Rating • Two-Position Rear Handle Heavy Duty Sealed Thrust Ball Bearing on Spindle

## 

### POWER DRILL ACCESSORIES









(B) Adjustable Hole Saw: For 1/4" electric drill or drill press. Drills any diameter from 1%" to 2%", Max. depths of cut 1%". Dial indicator sets hale size without removal from chuck. Shpg. wt., 1½ lbs. HD-257 ..... List 6,95 ..... Net 5.11

(C) Drill Molt Shorpener. Shorpens drills from 1-1/16" to 114" size.

Net 7.29 (H) SANDING AND POLISHING KIT

1 lb. HD-392 ...... Net .99

(C) Drill Molt Shorpener. Sharpens drills from 1-1/16" to 1½" size. (F) Right Angle Drive: Holves or (I) HI Speed Cope Saw Drill Bit: olso to sharpen chisels, knives, scissors, wood bits, etc. Drill holder is factory preel. Adjustable tool rest. High grade, oluminous oxide-stone grinding wheel. Shep. wt., ½ lbs. HD-243 Net 2.21

HIGH Angle Drive: Holves or (I) HI Speed Cope Saw Drill Bit: Driv

(E) 4 pc. Utility Kit: Grinds, polishes, shorpens, cleans, finishes. Kit contains 3" grinding wheel ½" thick, 3" wire wheel. Flanged arbor with ½" shank. All wheels have ½" bore. Shpg. wt., 1 b. HD-270 ......Net 1.43

Lifetime Sanding Accessories



Lifetime Sanding and Cutting Tools

Miracle Abrasive — harder than steel

• Makes sandpaper obsolete

The amazing discovery of brazing tungsten carbide grits to steel makes possible the finest sanding equipment ever known. Each grit becomes a sanding edge that perfarms perfectly and stoys keen and sharp indefinitely ... and makes sandpaper obsolete.

FOR USE ON WOOD, PLASTIC, PLASTER, WALLBOARD, ALL COMPOSITION MATERIALS

Eliminates forever the nuisance of stopping to change torn or wornout sondpaper. Faster—easier—saves time, effort, and money. Discs for use with all standard power drills, sheets for use with all standard occillating and orbital sandard says. Shaps, wt., for discs & sheet—6 ags.

#### Sanding Discs and Sheets

TYPE	Fine Grit (150)	Med. Grit (80)	Ceasse Grit (60)	Net ea.
A) S" Sanding Disc	HD-429	HD-430	HD-431	.87
B) 3%" x 9" Sheet	HD-432	HD-433	HD-434	1.12



The most exciting tool on the market today! It replaces the hondsaw for all types of sowing and tokes all the hard wark out of the job. Will cut wood, metal, composition; cuts straight and true and will cut bevel angles to 45° either side of the cutting line. Being a small blade, the saw can cut curves, circles, scrolls easily. Can be used for long ponel cuts, ripping, cross cutting, even an 2 x 4's; and it blows away the sawdust while cutting. Will cut wood up to 2" thick and steel %" thick. Its motor is meant for a lifetime—has a cilite bearings. Operates an 110/113V AC-DC: has an-off position push through slide switch, UL approved. Cames with 2 jip sow blades (wood and metal) and wrench, 6'2" conductor cord. Measures 6%" L x 6%" H. Shpg. wt., 5 lbs.

FHOR SPEEDWAY "17"-List 29.95 Net 15.98 

combination offer—Thor 17 Saw and 17246 Table

Net 24.95 Special co

Mp-33 Net 24.95
Universal Saber Saw Blades: Kit of 5 blades: Coarsemedium—medium-fine—fine—and metal cutting. Fit better
than 90% of all saber saws, such as Thor, Wen, Forsberg,
Ram, Shopmole, Block and Desher, Craffsman, Skil, etc.
High quality steel. Precision ground, filed and set. Shpp.
wt. 3 or



VERSA-VISE

TURN TO ANY . USEFUL AS AN EXTRA

VERSA-VISE (D): All the features of a regular vise-plus-locks in ony position, just tighten jows. Turns to any work position. Use standing or loid flot-turns 360° either way, larger jow surfaces—3½" x 2½"—plus removable pipe iows. Jows open 5".
HD-282 Shap. Wt., 17 lbs.
Right Angle Adapter: Adds belt adjustment for holding work at any angle. Shap. Wt., 2½ lbs.
Net 2.18

### **NEW Swingline** #101 Stapler Gun with 1,000 Staples

 High Compression Model Staples within 1/16" of corner

• 100% Jam Proof Open Channel Loading Open Channel Loading
Revalutionary, new stople gun with tremendous, pile driving
action. Delivers as much driving power as machines twice it
size and weight. Highly moneuverable — perfectly belanced extremely lightweight. All case hardened steel construction
Rust proof, bonderized finish. Na ailing required at any time.
Uses two stoples sizes — 4/16" and 5/16" — with no mechanical color of the stoples of the size of the stoples of the size of t

HD-323 Pkg 1000 4/16" staples HD-324 Pkg 1000 5/16" stoples .40 Net



SPRAYING DUTIES HD-415-List 39.95..

### COMPARE! YOU CAN'T BEAT LAFAYETTES' WHOLESALE PRICES



900X

The only Microscope in its class

featuring GRADE A optics!
Power Range 25X, 50X, 75X, 100X, 150X, 200X, 300X, 400X, 600X. 900X

Full Range Fine Adjustment

Safety Stop on Coarse Adjustment

Made to rigid design specifications-has

F-338 -List 69.95

NEW!

....Net 34.50



WIDE FIELD

VIEW !

NEW! 30X-50X "STEREO-SCOPE" • STEREOSCOPIC Binocular Dissecting Microscope

Wide Field 3-Dimension View • Two Models to Choose from • Wide Field 3-Dimension View • Two Models SEMI-PRO "STEREO-SCOPE": An especially engineered instrument featuring the stereoscopsis and wide view field needed in biology — petrography — archeology — mineralogy — criminology — industry — agriculture — etc. Indispensible for inspection of large specimens — small parts — surface features of gross objects — dissection — etc. Fixed objective lenses and interchangeable eyepieces for a choice of either 30X or 50X. Prismatic binocular head with full interpupillary adjustment. Ground glass stage 3.3/16" x 3.5/16". Oversize modified horseshoe base. Rack and pinion focusing. Automatic stop prevents over rise. Overall height 9½". Complete with fitted wooden carrying case. Shpg. wt., 6 lbs.

STUDENT "STEREO-SCOPE": A 30X stereoscopic student and serious hobbyist. Includes most of the features of our "Semi-Pro" model shown on this page. Fixed objective lenses and non-interchangeable eyepieces. All optics are achromatic. Ground glass stage measures 2%" x 2-13/16". Overall height 73/4". Complete with fitted wooden carrying

F-335 .....Net 17.95





800X "MICRO-SEARCH" **Laboratory Standard Microscope** 

• RECENTLY DEVELOPED DESIGN

. INFINITE MICRO-METRIC SLOW MOTION ADJUST

HUYGENIAN EYEPIECES -

ACHROMATIC OBJECTIVES 100X-160X-200X-320X 500X-800X

A truly fine dry system microscope, suitable for a wide range of laboratory-professional-and callege use. Monacular tube of most recent, anejecc, design. Spiral rack and pinion focusing mechanism. Coaxial, dual knob, coarse adjustment. Infinite micro-metric, fine adjustment. Trishoped, dove tailed, slide, of improved design-automatic stop prevents over-rise. Square stage, 70mm X 75mm, with click stop, substage, diophrogm. 30mm plano-concove reflex mirror. Paired, Huygens eyepieces of 10X and 16X. Three achramatic objectives of 10X, 20X and 50X. Refined, horseshoe design, base. Overall height 10". Gray statin finish, chrome trimmed. Dove tailed, fitted cabinet of selected ook with rubber bumper feet and carrying handle. Shpg. wt., 7 lbs.

MICROSCOPE SLIDES



"RESEARCHER" ■ MAGNIFICATION RANGE 25X - 1200X

• 4 OBJECTIVES, 4 EYEPIECES,

• FULL RANGE FINE FOCUS ADJUSTMENT

FULLY CONTROLLED, INTEGRAL MECHANICAL MOVEABLE STAGE

FULLY CONTROLLEO, INTEGRAL MECHANICAL MOVEABLE STAGE

This superb instrument closely parallels the "Society" grade microscope in every desirable detail and yet is available at very low cost.

Provides heavy, stable horseshoe base, smooth acting joint, enabling the body to turn through 60", perfectly balanced at any ongle. Tube length is 140 mm. Four Huyghens eyepieces and four achromatic objectives yield 16 cambinations of power from 25% to 1200%. By means of two knurled micro-mation screws at the rear of the stage, it is possible for the operator to move the stage (and the slide) a distance of 3/16".%", in any direction, while looking through the eyepiece. Alardware is of the finest quality. Tubes are of the highest grade chrome-plated bross. All fittings are expertly machined and threaded, making this scope suitable for the most exacting work. Scope cames with a set of 5 bosic dissecting instruments, mode of high-grade instrument steel. 10 slides, a pack of cover slips and a tube of maunting fluid. Includes dovetailed wooden carrying case. Shipping etc., 10 bs.

Net 44.50 Net 44.50



**HUNTING WITH THE** MICROSCOPE

LAFAYETTE MICRO-LITE

. USE WITH ANY MICROSCOPE FURNISHES BRIGHT, EVEN LIGHT

Specially designed for microscope illumination. Provides a bright, evenly lighted field of
view. Controlled intensity, by means of focusable condenser lens. Lomp may be raised or
lowered to any desired height on the 4½"
stanchion. Inclination and elevation ioint
permit swinging through 360" in both horizontal and vertical plane. Fully adjustable for
transparent or apaque specimens, direct or
indirect Illumination. Invaluable where ablique light is necessary. Operate on 110-120
volts AC/DC. Lomp is easily replaced. Self
contained switch, cord and plug. Lomp body
is 5½" long, stend is 5½" high including
base. Shap, wt., 1 lb.

F-248. .Net 2.95



PROFESSIONALLY PREPARED . SPECIALLY SELECTED MICRO-SUBJECTS

Specially selected stides of universal interest. Carefully prepared—cleaned, dissected, embalmed, stained, mounted and covered. Stides are professional size. Set includes 12 prepared stides and slotted, covered box for filing and storing. ered box for filing and storing.

F-123—Parts of Insects
F-124—Spiders and Disease Carriers
F-125—Tiny Creatures found around House
F-126—Sea Life

F-130—Life cycle of Insects
F-131—Bacteria
F-132—Pond, Morsh and Sea Life, Plankton
F-134—Micro-Animals
F-135—Micro-Organisms

F-136—Substance of Cells

--Set of 6 slides Net 1.39 Net 1.39 Net 1.39 Net 1.15 Net 1.39 Net 1.79 Net 1.59 Net 1.29 Net 1.29 Net 1.29

ADD TO THE ENJOYMENT OF YOUR MICROSCOPE

LIST 6.00

2.89

Guide for beginners and advanced users of microscopes. How the microscope works. How to prepare and study cultures—set up a microscopic zoo and garden—grow micro organism—perform micro surgery. Profusely illus-trated with photographs and drawings. 14 chapters of easy-to-read, highly informative text.

NEW EDITION

BK-1440

136 PAGES 51/2" x 8"

Net .89

#### TECHNICAL DRAFTING SET

Center Wheel Adjustment

Quality · Cormer

Crafts - A \$15.00 Value

5.95



### afayette IMPORTED SLIDE

F-341 LIST 25.00

### 5" POCKET SLIDE RULE

3" Pocket Silde Rule: Convenient pocket sized slide rule of specially selected and treated bamboo. Will not warp, shrink or lengthen under varying omospheric conditions. A, B, Cl, C, D and K scales engroved on white plostic surface. Reverse side of slide has standard S, L and T scales. The upper, beveled edge of the rule is graduated in m/m to 13 cm. Other date is divided into 5 inches by 32nds. Only 5-13/16" long over all. Carried easily in any pocket. Shpp. wt., 8 az.

F-340 LIST 6.00

#### UTILITY DRAFTING SET 2.59 • EXCEPTIONAL VALUE

Mode in Germony of hard rolled, nickel plat-ed brass. All instruments ore nested in a fitted,

ore nested in a fitted, velvet lined case. Contains three side wheel 3½" bow instruments—one a divider, one opencil and one a pen.

All have reversible needle point. 5½" composs with pen and pencil parts—and lengthening bor. 5½" divider with straightening device. 5" ruling pen. Extra handle for use with pen and pencil parts. Capsule with extra leads. Perfect for schools, labs, industrials or wherever precision drawing sets are used.

P-13

Net 2.59 F-13

Not 2.59

#### NEW JET-E-RASE ELECTRIC ERASING MACHINE PORTABLE - MOTOR DRIVEN!

. TIME SAVING - LIGHT WEIGHT

FINGER TIP CONTROL!
 4 ERASERS — 4 COLLETS — 2 BRUSHES!

The new, exclusive, Lafayette bottery operated erasing machine is the most modern eraser available. Sleek and streamlined as a racket—erases fast as a jet. The entire unit has been designed for convenience—ease and speed in erasing. Battery operation does away with bulky A.C. mators—trailing line cards—danger of shock. Safe enough for children to use. Entire unit—including bottery—weighs only 4 az. Fits the hand as naturally as a pen or pencil. Switch precisely located for finger-tip cantral. Per-mag mator ensures quiet—smooth running—vibration free operation. Permonently lubricated, precision bearings assure long, trouble free life. Includes four eraser cores. One soft—two medium hard—one gritly—ta cover all erasing problems. Two brushes—one soft—one stiff—for cleon up, and four collets that accept both the eraser cares and brushes. Easily replaceable bottery is a No. 1 or "C" cell. Supplied with bottery. Shpg. wt., 1/2 lb.

Not 1.49

F-424 Kit of two each, erosers and brushes

Net .24





10" Log Silde Rule: Constructed of specially selected, laminated, non-hygroscopic bomboo. All scales are machine engraved on white plastic in permanently occurate calibrations. Adjusting screws permit varying the tension on the slide. 21 scales in all including the more frequently used to, D and C1 scales on both sides of the rule. Evoluates trigonometric, C, D and C1 scales on both sides of the rule. Evoluates trigonometric, algebraic and exponential problems. L10 and L100 scales refer to B, scale. All after scales coordinate and refer to D scale. Scales are L, L11, scale. All after scales coordinate and refer to D scale. Scales are L, L11, T, Scale characteristics permit multiplication, dission, proportion, inverse proportion, reciprocals, cotangents, squares, square roots, cubes, cube proportion, reciprocals, cotangents, squares, square roots, cubes, cube proportion, reciprocals, cotangents, squares, square roots, cubes, cube proportion, reciprocals, cotangents, sines, P1 factor multiplication and division, powers and roots of numbers less than 1, powers and roots of numbers greater than 1, logarithms to bate "e". The most often used slide rule in all basic fields science, engineering, production and economics.

Shop. wt., 1/y lbs.





Makes Any Good Telescope Betterl Doubles Your Telescope's Power! Improves Definition! Provides Greater Eye Relief! Greater Illumination—Wider Field!

F-423

The Barlaw Lens is a negative (diverging) lens which can increase the range of magnification of any given set of eyepieces. Greater eye relief is provided—even on short facal length eyepieces. Sharpens definition and reduces image deteriaration by permitting use of low-power eyepieces to achieve high magnification. This also provides far greater illumination and a wider field. By increasing the effective focal length of the abjective—and reducing its relative aperture—it greatly reduces aberrations present in poorly carrected eyepieces. Latayette's Barlaw lens will make any good telescope perform like a much larger one. Fits all Latayette telescopes except F-330 Explorer. Accepts eyepieces of 24.5mm (.97") O.D. and fits draw tubes at that size. Shape. wt., 1 lb.



### **ACCESSORY EYEPIECES**

 Highly Corrected Hard Coated • 24.5 mm O.D.

Finest Quality

Manufactured to extremely close tolerances by one of world's leading manufacturers of optical accessories. These oculars allow you to obtain maximum performance from your refractor or reflector. You can determine the magnification possible by dividing the focal length of the eyepiece into the focal length of the telescope objective lens. All are hard coated. The 24.5 mm

Į	U.D., (-77 ) tits most relescopes curr	seusia gadiidp	l <b>e.</b>		
ŀ	Stock # Description	Net, ea.	Stock	# Description	N
ĺ	F-391 4mm Orthoscopic	8.95	F-396	26-32 mm Combination	
l	F-392 6mm Huygenian-Mittenzwey			Kellner-Achromatic Huyo	genia
l	F-393 9mm Huygenian-Mittenzwey	5.45	F-397	22 mm Keliner	
ı	F-394 12.5 mm Huygenion-Mittenz	wey 5.45	F-398	Sunglass-for above ocul	ars
	F-395 20 mm Huygens	5.75		Moonalass-for above ac-	

### 30x, 60mm SPOTTING SCOPE

A prismatic telescope using the same fine features as expensive binoculars! Field of view is 85 feet at 1000 yds.! Both front and rear optics are coated. High relative brillance due to great 60mm objective lens. Exceptionally small and light – weighs only 1½ lbs. including metal tripod! The perfect companion for shooting – hunting – viewing – naturalists – and hobbyists. Comes equipped with 11½" tripod and mount and zippered leather carrying case for both scope and tripod. Shop. Wt., 2½ lbs.

#### HARD MAPLE PANTOGRAPH


. FNLARGES - REDUCES REPRODUCESI PRECISION SUSPENDED!

21" adjustable tios from 11/2" to 8. Enlarges, reduces or

sketches

diagrams—
pictures—maps etc. Most rapid, accurate means of reducing or enlarging to scale. Lacquered highly finished bars are 21" lang and 3/" wide. Heavy metal standard, with bearing eliminates all friction. Chrome plated hardware—ratio thumb screws and nuts. Complete with lead, accessories and detailed instructions. Shpg. wt. 2 lbs. ...Net 3.75

"draftette" DRAFTING MACHINE



Full 180° protractor scale, finest aircraft aluminum with black sotin finish. Engraved, white filled numbers and markings are machine calibrated to ± .0005 of an inch folds file a jacknite . . slips into drower or briefcose, eliminates clutter of T-square, ruler, protractor, triangles. Clamps to drawing board ar sketch pad. Loyaut chassis, diagrams, sketches, design detail, surveys etc.
F-287 Draftete with 3 x 5" scale, shpg. wt., 1 lb. list 4.95.

F-289 Draftette with 3 x 5" scale, attached to 11" x 17" drawing board. Shop, wt., 3 lbs.

### OPTICAL MICROMETER

- Pocket sized Comparator Direct measurements to
- Measures Diameters-Radii-Angles

Linear scale in Inches and Millimeters

### latayette's direct imports

### Make These Prices Possible

THE NEW Professionally Designed and Produced 2.4" EQUATORIAL REFRACTOR Polaris

• 800-mm. Focal Length • 62-mm. Objective

Micromotion adjustments on both axes

● Coated optics throughout ● Equatorial mount 160x-88x-40x-22x with eyepieces included 200x+ by use of optional eyepiece

79.50

Only 7.95 Down

Latest in a long line of Lafayette refractors at reasonable prices. The unusual value of the Polaris is recognizable in the following specifications. Objective: Fraunhofer-type achromat, hard coated, 62.5 mm., 800-mm. focal length. Collects about 75 times as much light as the naked eye, resolving power 2 seconds, faintest discernible star 10.7 magnitude. All eyepieces are hard-coated Huygenians. Eyepieces included: 160x (5-mm), 88x (9-mm), 40x (20-mm), 22x (35-mm).

Finder scope is 6x, 20 mm. Equatorial mount with slow-motion controls in right ascension and declination. Tripod head with latitude adjustment. Clamp lever for declination and inclination. Accessories include sunglass, star diagonal, erecting prism, sun projection screen, field tripod, and wooden case. Magnifications of 160x, 88x, and 40x. Rack-and-pinion focusing-Heavy plating used throughout to prevent rusting. Shipping wt. 30 lbs.

F342 Shpg. wt., 30 lbs. Shipped Via Express Only F391 \*200x obtainable by use of optional 4-mm Orthoscopic Eyepiece

Net 8.95 Galactic 3" Equatorial Refractor Sale! 189 00

● 910mm FOCAL LENGTH ● 76.2mm CLEAR APERTURE ● MICROMOTION CONTROLS FOR DECLINATION AND RIGHT ASCENSION ● RESOLVING POWER 1.6 7.95

• 1.6" FINDER SCOPE - 500 MM. FOCAL LENGTH

• 1.6" FINDER SCOPE — 500 MM. FOCAL LENGTH

Truly superior quality—advanced design—aptically and mechanically suitable for serious research. The objective lens is a 79mm, hard coated, air spaced Fraunhafer achtramat with a clear aperture of 76.2mm (3"). Focal tength 910 mm, focal ratio f/12, resolving power 1.6". Seven coated eyepieces provide magnifications of 227X, 152X, 101X, 73X, 45X, 35X plus 25X through the viewfinder. Facusing by means an incra-precise rack and pinion drive. The viewfinder scope has a 42mm (1.6 in. clear aperture) abjective—500mm focal length-rack and pinion facusing—and will accammadate various eyepieces. The equatorial mount is oversized—insuring stability and smooth action. Finely calibrated hour and declination and right ascension. Micro-motion controls are fitted with flexible shafts and aversized knobs for ease of positioning while viewing. Body tube of white enameled aluminum for maximum strength with minimum weight. Accessories include three sunglasses, moonglass, two star diagonals, sun diagonal, erecting prism, sun projecting screen, extensible field tripod, chain brace, accessory shelf and waaden cabinet. Shpg. wt., 53000



COLLAPSIBLE ILLUMINATED



1.25

ismatic Lens

System

· Coated Optics

natically lighting flashlight

ı	stamps, etc. Size 41/4" x 176".	
1	F-426	.98
ı	Lots of 3 ea.	.85
ı	stamps, etc. Size 4½ " x 1½".  F-426	.08
ч	Bulgers 2 Bullety (2 redelines to see all	

### INDOOR-OUTDOOR THERMOMETER

Tell inside and autside temperature—instantly—from the comfart of your room, Inside location—ideal far quick-easy reading. Dual tubes single scale for instant, visual comparison. Plastic cose with madern tapered lines. 8" x 2½" x 48" long capper capillary tube and bulb. Large scale numerol for ease of reading. No moving parts to become worn, Shpg. Wt. 1 lb.




SX MAGNIFICATION -

2" FIELDI ONLY 2.95

e ONLY 2.95

A fine, fixed-facus illuminated magnifier — magnifies work 5 times. Field of vision is 2" at 1½" working distance. Unlimited usage in industry—shop—habbies. For checking tools and dies—castings—fargings—welds—etc. Inspection of meter movements—fine soldering electronic repairs. Magnified area easily accessible through cut out invaluable in habbies such as stamp or coin collecting, photography, entomology—mineralagy—etc. Excellent map reader. Camplelely partable—uses two No. 2 cells for power. Weight ¾ lbs., length 8½" averall. Shpg. wt., 1½ lbs.

F-193 ——Net 2.95



Net 79.50

132x - 88x - 64x - 40xwith eyepieces.included • 800-mm. Focal Length

- 2.4" Objective Lens
- Slow-motion controls

200x\* by use of

optional eyepiece

18.95

Only 5.95

Only 5.95

Down

The rack-and-pinion drive with coaxial knobs. Body tube of white enameled duraluminum. Moving parts of heavily chrome-plated brass. Includes 5x 20-mm. Journal of the coaxial knobs. Body tube of white enameled duraluminum. Moving parts of heavily chrome-plated brass. Includes 5x 20-mm. gram, 20 mm. Sunglass, erecting prism, star diagonal, wooden cabinet, tripod with chain brace. Objective lens 62 mm., focal length 800 mm. Shipping wt 5 lbs.

F391 \*4-mm Orthoscopic Eyepiece for 200x

DIRECT VISION PRECISION SPECTROSCOPE



■ 400-800 MILLIMICRON SCALE

F-193

- ADJUSTABLE SLIT WIDTH: DRAWTUBE SLIT FOCUSING
- HORIZONTALLY SPLIT FIELD



A prismatic type, hand-held instrument that has most features of the finest standard labaratory instruments.

The millimicron scale is adjustable for shorp facus and for position (with "lack-in" feature to fix scale with relation to known spectral lines). Highest grade optics yields a broad dispersion field of high intensity obtained from best quality glass dispersion prisms, while excellent lens system resolves the closest spectral lines into 2 distinct lines. By a twist of the callor, a harizontally split field is obtained by which a camparison can be made of two light sources simultaneously. Tubes and collors are constructed of highly polished corrosion proof steel. Equally swited to laboratory or field work, the spectrascape has a wide array of applications: emission spectrum analysis of absorption spectra with the small rest tubes provided. Absorption spectrum analysis has application in many branches of technology—color and dye chemistry, bladd chemistry, clinical medicine, criminalogy. Complete with plush-lined case, shipping wt., 1½ lbs.

Not 76 50



A finely made surveying instrument of professional quality. Made entirely of bross. The Abney tapographic level enables the user to determine ground elevation—measures degrees of slape ar inclination—run a level line—etc. Permits preliminary surveying with little ar no experience. Fine prismatic system. Arc scale is divided into 60 degrees both sides of zero. Vernier scale reads 1 to 10 minutes. Arc swings from 0 to 90 degrees, Used by formers—builders—gardeners—caretakers—mointenance menet. Particularly useful in laying out drains—retaining walls and fences—driveways—fields—etc. Includes leather case and strap. Imparted to save you 50% of regular cast. Shpg. Wt. 3 lbs.

F-138

### NEW Students Direct Vision SIMPLEST WAY TO OBSERVE SPECTRA

BETTER THAN ANY GRATING 'SCOPE OF EQUAL COST

HIGHEST GRADE
OPTICS IN DIRECT

E constant VISION FIELD Every physics, chemistry, science class, or habbyist can afford to awn this superb instrument. It is the simplest means by which one can abserve emission spectra from light sources and vaparized chemical salts, and the Salar Spectrum.

broad dispersion field of high intensity is obtained from A broad dispersian field of high intensity is obtained train several dispersing prisms of matched glass, while a high grade aptical system yields good resolution, sufficient to separate 5769.64 fram 5790.6A in the spectrum of a fluarescent lamp. The slit has adjustable width and can be facused sharply by means of an eye piece draw-tube, assuring easy viewing and establishment of fraunhafer lines of the Salar spectrum ar bright lines of the emission spectra. Metal parts are made of highly polished carassian-proof steel. Cames in plush-lined case. Shipping wt., 9 as. Net 19.50

### SUGAR REFRACTOMETER

- MODIFIED ABBE DESIGN READS % SUGAR DIRECT
- NO MOVING PARTS TO
- CAN BE USED TO DETERMINE REFRACTIVE

F-358



Here is a beautifully constructed scientific tool of simple design, easy to aperate, with no moving parts, except for the focusing eye piece.

Operation is very simple. A few draps of the sample are placed on the prism, the caver is closed and observation is made by means of tungsten illumination or doylight. A perfectly clear field, completely color carrected, shaws a reticle graduated in percent from 0.32%. With the sample in place as described obove the field will shaw a sharp dividing line between a bright and dark partion; where the dividing line folls determines the reading, which can be estimated to 0.1% accuracy. The instrument can be canverted to a universal laboratory type by changing % readings to "index of refraction" readings, No. [Consult Chemical Handbook ar literature.]

This instrument is an essential tool in the fields of sugar refining, agricultural, foad technology, medicine, theoretical chemistry, etc.

Net 29.50

MAXIMUM-MINIMUM THERMOMETER



For weather enthusiasts gardeners farmers, etc. Gives three readings at a glance — maximum, minimum and present temperatures. Self-registering — na knobs — magnets — ar push buttants needed for reset. Magnifying lens case for eose of reading. Maintains automotic check an temperature variations. Makes you the local weather expert. Shop. wt. 1 lb.

List 6.95

LAFAYETTE TELESCOPES ARE AVAILABLE ON LAFAYETTE'S EASY PAYMENT PLAN - SEE PAGE 38

### fayette CAMERA DIVISION

presents PHOTOGRAPHIC SYSTEM VERSATILITY at LOW COST!



### **'RANGEFINDER 35'**

**ELEMENT F2.8 COATED LENS!** 

COUPLED RANGEFINDER

only

TRANSPORT! 

✓ NINE SHUTTER SPEEDS TO 1/300! 

✓ MXF SYNC-ALL SPEEDS — ALL BULBS — PLUS STROBE! 

√ F2.8 45mm COATED LENS! 

√ HI-SPEED REWIND! ✓ STANDARD PC FLASH TERMINAL! ✓ DOUBLE EXPOSURE PREVENTION! BUILT-IN SELF TIMER!

Ladystet's outstanding camera value! Precisian-made to order for the camera fan who is a wise buyer. Check the features — then compare Lafayette's price with any other brand. Fost F2.8 coated anastigmat lens and extra-wide lens aperture far brilliant, shorper full color or block and white even in poor light. Sight and facus through combined range-view finder. Fully synchranized at all speeds for class F, M and electronic flash. Speeds from 1 sec to 1/300th. Ropid advance sets shutter, counts exposure and Fransports film. Built-in delayed action timer — automotic exposure counter-and film stoy. Hispeed rewind with folding lever. Standard accessory shoe on top-film type indicator. All metal body with brushed chrome trimblock leatherette covering. 20 ar 36 exposures on black and white or color 35mm film. PC flash terminol. Shpg. wt. 3 lbs. Use series 6 occessories.

F-197 - Leother Evereody Case, Shpq. wt., 1/2 lb.

Three piece outfit - camero abave - Eveready case - and folding BC flosh gun. Shpg. wt. 41/2 lbs.

35mm. PROJECTOR-VIEWER

• Projects Color Sildes

• Sharp-Brilliant-F3.5 Lens • Fast Change Slide Lever

19.95

HOLDS 36 SLIDES © FAST SLIDE CHANGE LEVER there is a lightweight and compact 35 MM viewer that compares with models selling for more than twice the price! Precision mode . . . simple, feel-preof construction. Use it as a lable viewer with preof construction. Use it as a lable viewer with the self-contained, 5½" square ground glass screen, or preject your slides en a light-colored well er prejection screen and enjey e 10 sq. ft, pictura with the selme sharp fecus. Meegasine holds 36 slides thet change with the flick of a lever. Cemport steel core with carrying hondle measures salty 10" x 7" x 3½" deep. Supplied complete with stenderd 100-watt projection bulb, F3.5 lens, prijection mirrer, view screen, en-off swith, line card end instructions. Fer 105-115 V. AC eperetion.

7-276 - Shop. wt., 5 lbs .... Net19.95

on 110V AC or Midget Battery Pack

Designed by one of the foremost electronic flath engineers. More power—more practical features than any other unit in its price closs. Thousands of flashes from one lifetime tube—pays for itself in savings on flash-other unit in its price closs. Thousands of flashes from one lifetime tube—pays for itself in savings on flash-other unit in its price closs. Thousands of flashes from one lifetime tube—pays for itself in savings on flash-other unit in its price closs. Thousands of flashes from one lifetime tube—pays for itself in savings on flash-other unit in its price closs. Featherweight flash head weights only 16 ozs. Entire unit—including battery—only 2 lbs. 4 ozs. Battery pack measures 5½" x 3" x 1½"—fits gadget bag or pocket. Coiled cord butbs—let's Aos. Bottery pack measures 5½" x 3" x 1½"—fits gadget bag or pocket. Coiled cord operating on AC. Universal bracket fits any comera with a tripod socket. Gun also maunts on side of operating on AC. Universal bracket fits any comera with a tripod socket. Gun also maunts on side of portable pack. Light is calar balanced (6500' Kelvin) for color pictures without filters. Kodachrome guide operating on AC. Universal bracket fits any comera how in the saving state of the side of the saving state of the sa

New "SPEEDLITE" Electronic Photoflash operates





NEW-BOOSTER EXPOSURE METER 6.95 WITH BOOSTER



Auxiliary tens pictured nat included

 ASA Scale—LVS Scale Stills or Mavies • Includes booster-Leather cases-neck cord



Extremely versatile — extremely simple. Highly legible direct reading diol. Speeds from 4 sec. to 1/1000 sec. test aperture settings from fil to f.32. ASA scole 6 to less aperture settings from fil to scole 8, 16, 24 and 32 fromes per second. Booster cell makes possible readings from textremely low light levels. Small-rugged-lightweight includes boaster cell, leather coses, neck cord and instructions. Shpg. wt., 1 lb.

F-349 List 11.95

### FOLDING BC FLASH GUN

F

FOLDS LIKE A FAN TO 4" x 2"1
 EFFICIENT B-C OPERATION

Brand new unique — pochet size — completely folding from new — unique — pochet size — completely folding from unit of Lofavette's famous low-cost Efficient 4/3 floath unit of Lofavette's famous low-cost Efficient 4/3 floath unit of Logarity (Logarity Logarity) (Logarity Logarity) (Logarity Logarity) (Logarity Logarity) (Logarity Logarity) (Logarity) (Logarity)

### PAN-HEAD TRIPOD

. LIGHTWEIGHT - STURDY - LOW COST Five section, chrome plated, brass tripad. Extends to 45" telescopes down to 12½". Weighs only 20 azs. Tension adjust screws for each leg. Comera retaining screw on panhead rotates — makes turning camera unnecessary. Pons and tills with a single motion. Handle is detachable. Pans 360"— tills 145". A "must" to take the "jiggle" out of those pacific shots. Shop, wt., 2½ lbs.



FASTEST! FINEST! LOWEST PRICES! 11/2" f1.4 Telephoto 6.5mm f1.4 Wide Angle 11/2" f1.9 Telephoto • 6.5mm f1.9 Wide Angle



Lofoyette—and only Lafayette—has these lenses at prices never before possible!

Now you can odd that distant scene—thate exciting close ups. Add unlimited wersatility to your movie camero. The finest cooled optics or used throughout-lense to corrected. Fit all 8mm cameros with standard D mount such as Kodok, resulting to corrected. Fit all 8mm cameros with standard D mount such as Kodok.

Keystone, Revere, DeJus, Bolax H8, etc. Satin chrome finish, Removable lens hoods. Accept standard filters. Individual lenses complete with leather cases. Sets are packed in jewel type presentation cose. Complete with lens cops.

Accept standard filters. Individual lenses for 8mm. Exceptional speed—extreme packed in jewel type presentation cose. Complete with lens cops.

11/2\* § 1.4 Telephote: fastest available lens for 8mm. Exceptional speed—extreme sharpness. Focuses 3½ ft. to infinity. Click stops fl.4 to fl.6. Jx magnification.

Net 13.95

5 element lens. Focusing mount. Shpg. wt., 1 lb.

Net 24.50

Fast—for poorest light conditions. Click stops fl.4 to fl.6. 8 element for the force of the poorest light conditions. Net 24.50

Net 24.50

11/2\* § 12 Falenbette: First shorn, fully cooled. Click stops fl.9 to fl.6. Focuses

F-300—List 49.95

11/2" fl.9 Telephoto: Fost, shorp, fully cooled. Click stops fl.9 to fl.6. Focusing mount. Shop. wt...
3.5 ft. to infinity. 3x magnification. 5 element systems, Focusing mount. Shop. wt...

Not 14.95

Angle: Covers 4x area of normal lens. 8 element retrofocus us for universal focusing. Click stops fl.9 to fl.6. Shpg. wt., 1b. 302-List 38.95 formulo. Fixed focus

Net 18-79

F-303 List 39.95

F1.4 Marched Set: The finest available. Both f1.4 Telephoto and f1.4 Wide Angle
F1.4 Marched Set: The finest available. Both f1.4 Telephoto and f1.4 Wide Angle
F1.4 Marched Set: The finest available. Both f1.4 Telephoto and f1.4 Wide Angle
F1.4 Marched Set: The finest available for the movie camera fanil Both
F1.304—List 89.95 Net 39-50 novie camera fant Bath presentation case. Shpg.

rect magnification. Fransporencies are arti-liantly illuminated and enlarged through o fine optically ground and polished lens. Electrically operated—equipped with bulb, socket, on-off switch, 6 ft. cord and plug. Alt steel construction—finished in platinum grey enomes. Shpg. wt. 2 lbs. F-26.

### NEW "mini-pro" 2" x 2" 35 MM SLIDE PROJECTOR

2595

NCLUDING POWER PACK AND BATTERY

● COMPACT - ONLY 81/2" x 6" x 41/2" OVERALL

BRIGHTER - SHARPER - EVEN IN LIGHTED ROOMS • 80 mm f/3.5 COATED 3 ELEMENT LENS



#### "35" CLIP-ON EXPOSURE METER

• Fits camera accessory shoe • ASA scale 6 to 3200 Measures reflected and incident light

Exceptionally convenient exposure meter. Clips right on comero—quick easy reading. Gives better, more accurately exposed pictures with a minimum of effort. Speeds 1/1000 to 30 sec. Lens aperture fit to fi22. Light volue scole (LVS) from 1 to 18. Cine settings from 8 to 64 frames por sec. Measures reflected and incident light, Mounts on comerce or may be hand held. Complete with leather case and instructions. Shap, wt., ½ lb. F-351-Reg. 9.00

ELECTRIC SLIDE

Makes slide viewing a pleasurel Versatile built in adaptor centers all slides for cor-rect magnification. Transparencies are brit-

VIEWER

For all size slid from 35mm to 2% x 2%.



Genuine pigskin-not plastic, Full 10" a x 4 . noise your camero and air ac-cessories. 20" zipper top. Zipper pouch in lid holds filters, etc. Outside pouch with strap and buckle. All bross hard-ware. Loops and strops on bottom to hold tripod. includes shoulder strap and pad. Shaa. wt. 1 lb. Net 3.75 F-320 List 8.95

### ELEVATOR TRIPOD

• Folds to 16" including Pouhead! ● Extends to 47" PLUS 7" Elevator!

● Tri-Tilt head — Moves in 3 planes!

For any small camera — 35mm — reflex — or movie. Professional quality for professional results. Strong — steady — lightweight. Pencil slim, chrome plated, brasslegs. Lock securely in place — fold down readily. Single action till-pan — and swing over for toking pictures in vertical or harizontal format. Geored elevator contents with positive lock and folding cronk. Weighs centerpost with positive lock and folding crank. Weighs anly 31 azs. All the most wanted features in one tripod. Shpg. wt., 21/2 lbs. F-339 List 19.95

### VIEWER

· LARGEST PICTURE AREA OF ANY HAND VIEWER SEMI-AUTOMATIC SLIDE CARRIER

9 9X AREA MAGNIFICATION

The finest slide viewer available. Distortion free, oversize lenses give brilliont, uniform coverage, targest picture area of any hand viewer for easy group viewing. Push button focusing, finger tip control. Semi-automatic slide corrier automatically activates light. Built-in tripod socket for table top use: Shop, wt., 1 lb.

F-352

Net 7.95

### 35 mm Slide File HOLDS UP TO 300 SLIDES

Portable all steel 35mm slide file, Store 150 2x2 glass slides or 300 2x2 cardboard slides. Includes index card, and numbered strips for quick, easy identification. Metal handle and 2 snop cotches. Finished in platinum groy ename!. Shop, wt., 3 lbs.

F-161 Net 1.69





### PANHEAD

rotates — mokes turning camera unneces- sory. Weighs anly 4 oz. Handle is detach-able for compactness. Twist of handle locks both pan and till. Pans 260° filts approx. 145°. Shpg. wf., 8 oz. F-215 ... Net 1.66



plated. All-angle "Tilt-Top" fits German and American Tripads and Cameras. Posi-Inexpensive indispensable accessory.

wt., 2 lbs. F-305-List 75.00 LAFAYETTE'S PHOTOGRAPHIC EQUIPMENT MAY BE PURCHASED ON LAFAYETTE'S EASY PAYMENT PLAN



8-370 Bettery used in F-370 portable power pack. Burgess U160-List 7.95

REGULARLY SALE PRICE












otion? Sturdy bross construction — high polished chrome finish. Comera retaining screw



BALANCES STEREO SYSTEMS TWO METERS IN ONE

ACCURATE TAPE RECORDER LEVEL INDICATOR

Forever ends the problem of adequately balancing your stereo system. Two loudness meters provide a continuous comparison of speaker levels. The scales are calibrated in "Volume Units" and percent. 1.2 volts input sensitivity, for 0 VU or 100 percent indication. Instead of continuously running back and forth between listening position and volume control, you can balance the entire system in one step. The special calibrating switch and 20 db attenuation controls permit exact matching of channels. The ideal recording level indicator for inexpensive stereo tape recorders giving accurate, reliable readings. Safeguarded against burning out by two internal DC blocking capacitars. Greater than 8,000 ohm impedance permits connecting to output circuits without loading. The entire unit is housed in an attractive plastic case 3" x 1½" x 5½". Shpg. wt., 2½ lbs. TM-40 STEREO BALANCE METER.



### AUDIO OUTPUT VU LEVEL METER

A level meter for monoural systems, this unit is calibrated in Valume Units and percentages in accordance with standard VU meter practice. Precise damping enables quick and accurate indication of the average level of all non-sinusaidal audia signals. It has a maximum sensitivity of 1.2 valts for 0 VU indication, with a built-in 20 db attenuation control. This meter has countless uses, its 8300 with a buttern 20 do arrentation cantrol. Into mater has conflets uses, its 8300 ohm impedance being high enough not to food most circuits. It can be used for accurate level control of home hi-fi systems, especially where the amplifier feeds a remote loudspeaker. It is ideal as a consistently accurate recording level indicator, it indicates proper level in PA, paging and commercial music distribution systems. Housed in a compact plastic case 4" x 2-3/16" x 1-3/8". Shpg.

wt., 2 lbs. TM-20—AUDIO OUTPUT LEVEL METER ...Net 5.95 KIT OF 48 SOLDER LUG STRIPS

Replaces oil snap terminol 67½ V. B. batteries. When indoors you can operate set on regular 110V AC without using up your expensive "B" battery. Also rejuvenates old batteries for many extra hours of use, Complete with AC cord and plug. Fits in place of your battery. Size: 1¼" x 2½" x 1½". Shpg. wt.,1½ lbs.

Handy assortment of 48 solder lug terminal strips with 8 af each type from 1 through 6 lugs.

"B" BATTERY

ELIMINATOR AND

CHARGER FOR

PORTABLE RADIOS

2.95

NEW! LAFAYETTE'S MINIATU HI-FI SPEAKER AND ENCLOSURE

SUPER VALUE!



Good things come in small packages! I You'll agree when you see and hear this amazing speaker system. Use it as an extension speaker, as the second unit in a stereo setup, or in pairs for a low-power stereo installation. Housed in a beautiful mahagany-finished wood cabinet with ventilated back cover, the 5-watt 4" x 6" speaker is designed to work from either 4 or 8 ahm outputs. System is supplied with 25 feet af cable which should meet any hook-up requirement. Over-all size: 9½" wide x 7¾" high (inc. feet) x 3¾" deep. Shpg. wt. 5 lbs.

Cable Address: WHOLRAD
Telephone: AXtel 1-7000


#### NEW! FAMOUS BRAND 2-STATION INTERCOM

ALL-METAL UNBREAKABLE CABINETS

8.95

- VERY SMART STYLING—FOR CHILD'S
  ROOM OR LIVING ROOM
   FOR 117 VOLTS AC OR OC
   SENSITIVE—PICKS UP SLIGHTEST
- SOUNDS AT A DISTANCE COMPLETE WITH 50' CABLE FOR HOME OR OFFICE

- DEAL BABY SITTER OR SICK ROOM WATCHER



Specially Priced At



IMPORTED TO SAVE YOU MONEY Automatic — efficient — easy to use. Strips insulation from all wires, 12 to 20, neatly and

Delayed return action prevents crushing fine wires. A real time saver for servicemen — electrical workers — production lines — etc. Narraw spaced handles for easy grip. Lightweight and easy action for less fatigue. No bother of changing blades or adjusting cutter for varying wire sizes. Extremely well built for years of service and uniform performance. Shpg. wt., 1½ lbs.

"Belayed Action Return" Strips solid

LAFAYETTE RADIO  CORPORATION  165-08 Liberty Avenue  Jamaica 33, New York  Frank print clearly your full name & address  Name  Street Address  PLASE To such this order hispard to another person of to a different address, pive direction, p	LAFAYETTE RADIO  165-08 Liberty Avenue  Jamaica 33, New York  France print (death) proof followers A sedem  France	AFAYETTE RADIO  CORPORATION  CORPORATION  CORPORATION  CORPORATION  CORPORATION  CORPORATION  Date  Date  Corporation  Date  Date  Corporation  Date  Date  Corporation  Date  Corporation  Date  Corporation  Date  Date  Corporation  Date  Cor	bs. -122	-Station Interco					e 12.50		SO' CABL		Н		teplaceme	ent Blades f	ar Abave		,		7 per p
AFAYETTE RADIO  CORPORATION  165-08 Liberty Avenue Jamaica 33, New York  Political norma & address.  Store  Accel govantity No. REQUIRED SHIPPED  Store  The political norma with address.  Store  Store  The political norma & address.  Store  Store  Store  The political norma & address.  Store  St	AFAYETTE RADIO  CORPORATION  165-08 Liberty Avenue Jamaica 33, New York  Series and the series and	AFAYETTE RADIO  CORPORATION  CORPORATION  CORPORATION  CORPORATION  CORPORATION  CORPORATION  Date  Date  Corporation  Date  Date  Corporation  Date  Date  Corporation  Date  Corporation  Date  Corporation  Date  Date  Corporation  Date  Cor		US	ETH	E L/	AFA	YE	TE	EA YOUR	SYCONVEN	PA HENCE,	CUT AL	IEN	ED LINE	LAN	i – Requ	uires	only	10%	Dow
PAGE QUANTITY HD. REQUIRED Store Locks to Scand to a different address, give directions here:  Proto:  Proto:  Proto:  Proto:  Proto:  Store  Proto:  Proto:  Air.  Store  Proto:  Proto:  Air.  Store  Proto:  Air.  Ai	TERADIO  RATION  RATION  RATION  SAVENUE  3, New York  Solution  Doile	TE RADIO  RATION  RATION  Some York  Some Dote	66	24	Z											PLEASE DO NOT USE	tf you want this order Name Shipping Point	Name	Please print clearly		5
PAGE QUANTITY HD. REQUIRED Store Locks to Scand to a different address, give directions here:  Proto:  Proto:  Proto:  Proto:  Proto:  Store  Proto:  Proto:  Air.  Store  Proto:  Proto:  Air.  Store  Proto:  Air.  Ai	TERADIO  RATION  RATION  RATION  SAVENUE  3, New York  Solution  Doile	TE RADIO  RATION  RATION  Some York  Some Dote		Address	you have							-				STOCK NO.	shipped to another p		your full name & add	۵ _ ~	FAYE
ADIO  enue York  R.F.D. F.O. Box HOW WE State of Figure 1 of State  Stat	ADIO  ADIO  Sounded equipment when deducted be nowned when deducted to power things and the color to power things and the color to ment specially built or orders to ment in the colors to the special power than the colors to the special power that the power to supper the colors to the c	ADIO  Counts have already been addrest in or so or we will be a man in socially will not make the man and a man and			your previous													Post		berty Av	TTE R
P.O. Box HOW WE girns here:    Formula   Formu	Sonder a colored when restable of meant specially built or ordered for we follow your thipping instructions sizes, (such as cabinet, oreness or expense or freight.) Experts or freight. If HERE IS NO AGENT IN YOUR Methanditie ordered form telegrate or freight in followed enough for Postage/SI Charges. WE SHIP used amought. Include enough for Postage/SI Charges. We ship used amough for Postage/SI Charges. We ship used amought. Fill IN AMOUN Fill IN AMOUN Followed in the following state of the following	Soloded equipment when rebuilt or more already built or power and excited in our meant specially built or ordered for pure we follow your shipping instructions. He sizes, luch as cabinats, onesnot and expense or freight hipping instructions and expense or freight hipping instructions and expenses or freight hipping in the your told we shall be a cobing or freight hipping in the your told we shall be a cobing or freight hipping in the your told we refund the year of the	L65.08 LIBERTY	Postal Mail Zone	our last address											ED SHIPPED	ddress, give		01	enue York	ADIO
	If this is on Easy Pay order Check here Don't ADD SHPG. CHARGE FOR EASY PAY ORDERS.  N.Y. BROM S. M.Y. BROM S. M.Y. BROM S. M.Y. BROM S. M.	Include enough may consider the service of the serv	AVENUE   NEW YORK	State												Mfr's	here C	O. Box	Ordered fro Lafayette Catalog Number	We follow sizes. (such express or filer there was either was eithe	Standard eq ment specia payment sho
Total for Goods  Total for Sales  Total  NEWARK 2.N.J. PLAINFIELD, N.J.  NEWARK 2.N.J. PLAINFIELD, N.J.  NEWARK 2.N.J. PLAINFIELD, N.J.  NEWARK 2.N.J. PLAINFIELD, N.J.	prices are not f.o.b. re' special requirements o exchange, credit c e.		BOSTON 10, Mass.	POUNDS	TOTAL LBS. OZ.		-									WEIGHT LBS. OZ.			der ce not co der should to te letter shee both order on	vs weights ar	shipping points, and equi

ORDER

FORM

### MINIMUM ORDER \$20.00 TOTAL CASH PRICE -DOWN PAYMENT 10% OR MORE, MINIMUM \$5

NOTICE TO THE BUYER: 1. Bo not sign this agreement before you read it or if it contains any blank space. 2. You are entitled to a completely filled in copy of this agreement. 3. Under the law, you have the right to pay off in advance the full amount due and under certain conditions to obtain a partial refund of the credit service charge.

Before filling out amounts see EASY PAY PLAN SCHEDULE and example, Figure your sums first on separate paper to avoid errors. USE INK, DO NOT ERASE OR CROSS OUT.

#### RETAIL INSTALLMENT CONTRACT LAFAYETTE RADIO CORPORATION (SELLER) 165-08 LIBERTY AVE., JAMAICA 33, N. Y.

sells and buyer purchases merchandise as described on reverse side hereof to be kept in good repair and unencumbered at buyer's stated address. Seller shall retain title to and right to possession of merchandise until fully paid. Upon default of any payment or payments seller may declare entire unpaid balance due at once and may also repossess merchandise retaining previous payments as compensation for the use thereof. If proceeds of resale of merchandise are insufficient to cover buyer's obligation, buyer will pay the deficiency to seller; if proceeds result in overage, seller will pay such overage to buyer. Payments will be made to the place and/or to any party designated by the seller

<mark>LAF</mark> AYETTE	RADIO	CORPORATION	(SELLER)

BUYER SIGN

HERE 7 Signed

EASY PAY ORDERS SENT SHIPPING CHARGES COLLECT. DO NOT INCLUDE SHIPPING CHARGES. RETAIL INSTALLMENT CONTRACT

To fill in spaces below correctly refer to

EASY PAY PLAN Schedule on this sheet

Buyer's Copy Mailed-Date\_

(Please Print) Name.

Home Address

How Long At

This Address\_

and note example.

1. Total Cash Price

2. Sales Tax (if any)

3. Total (items 1+2)

(10% or more) \$5. Min

(item 3 minus item 4)

Credit Service Charge

7. EASY PAY BALANCE

(Add items 5+6)

Total EASY PAY Price

(Add items 3+6)

(See EASY PAY Schedule)

4. Down Payment

5. Unpaid Balance

Present

City\_

(L.S.) DATE

If Unpaid

#### "EASY PAY-PLAN" PAYMENT SCHEDULE

If Unpaid Balance is	Credit Service Charge	Monthly Payment		If Unpaid Balance is	Credit Service Charge	Manthly Payment
15.00 - 25.00	2.50	5.00		100.01 - 110.00	11.00	10.00
25.01 — 30.00	3.00	5.00		110.01 - 120.00	12.00	10.00
30.01 - 35.00	3.50	5.00	1	120.01 - 130.00	13.00	10.00
35.01 - 40.00	4.00	5.00		130.01 - 140.00	14.00	11.00
40.01 - 50.00	5.00	5.00		140.01 - 150.00	15.00	12.00
50.01 - 60.00	6.00	6.00		150.01 - 160.00	16.00	12.00
60.01 70.00	7.00	7.00		160.01 180.00	18.00	13.00
70.01 - 80.00	8.00	7.00		180.01 200.00	20.00	14.00
80.01 - 90.00	9.00	8.00		200.01 - 225.00	22.50	15.00
90.01 — 100.00	10.00	9.00		225.01 - 250.00	25.00	16.00

Balance is	Service Charge	Payment
250.01 - 275.00	27.50	17.00
275.01 — 300.00	30.00	19.00
300.01 - 350.00	35.00	21.00
350.01 - 400.00	40.00	24.00
400.01 - 450.00	45.00	27.00
450.01 - 500.00	50.00	30.00
On orders over \$5	00.00, send dow:	n payment
of 10% or more. Po	gyments and cre	dit service
charge will be i	in proportion to	amounts
shown on schedul		

	For purpose of receiving cre	edit for above EASY PAY PLAN	purchase, the l	ouyer ma	kes the follow	ing representation:	
With Parents Whom Spouse Living Alone	Landlord's Nome and Address				11		
	rmanent (Check evious which)					Hew Leng (Years)	(Months)
Age (Must Be Over 21)	Single Name of Married Spouse	Spouse Employed By			[Address]		Salary
Draft Classification	Reserve Stotus	from Lafayette before? No	On time Payment?	No D	If yes, please Time Payment	give your Lafayette Account Number, No.	
Real Estate Holdings — Addre	111			City		Ştata	
Recorded in Name of				sent ue \$		Mortgage \$	
Name Present Employer	If self-employed, so state		Position Sadge N	•.	Salary	Hew Long (Years)	(Months)
Business Address			Any Othe Income	r	Source		1
Name Former Employer						Hew Long (Years)	(Months)
Bank Account With	Savings   Checking	(Add	ress)				
First Frade Reference		bbA)	ress)		Highest Credit \$	Still Owing \$	Monthly Payment \$
Second Trade Reference	(Name)	(Address)	(City and State)		Highest Credit \$	Still Owing \$	Menthly Payment \$
ihird Frade Reference	(Name)	(Address)	(City and State)		Highest Credit \$	Still Owing \$	Menthly Payment \$
Negrest Relative	(Name)	(Address)	(City and State)				7
	dame (DO NOT LIST THOSE	WITH WHOM YOU RESIDE)	Address			Relationship	

PAY PLAN TERMS

FOR OFFICE USE ONLY
Account Number

\_State

Telephone.

Balance

If Item (5) Unpaid

Service Charge tem (7) EASY

Your Monthly Payment

(See Schedule) is

for 11 months or

And your final Monthly

each month beginning one

month after shipment for

You will pay \$10.00

payment will be

and a final Monthly

Credit

Buyer agrees

payment of \$\_

to pay

PAY Balance

Item (6) Credit

EXAMPLE.

=106.50

= 11.00

10.00

110.00

Monthly

7.50

PAY PLAN

AVAILABLE ON

Observatory .

SELES NSP OBE ARENT

FIRST **Aeronautics** and TIME Teachers UNDE of Astronomy N

Astronautics. \$100.00

Adjusta

Satellite

THE UNITED STATES, AVAILABLE ONLY THROUGH LAFAYETTE

CANADA

Qο

MEXICO

Navigators **Students** 

IMPORTANT: Please sign this form before mailing. Be sure to give age. (Must be over 21).


## MORE LAFAYETTE SPECIAL VALUES!

NEW! A SCIENTIFIC INSTRUMENT FOR THE EXPERIMENTER ...

### NOVATRON

- . MINIATURE ATOM SMASHER
- PRODUCES 75,000 VOLTS
- ABSOLUTELY SAFE

COMPLETELY WIRED



### LAFAYETTE PROFESSIONAL QUALITY COMMUNICATIONS RECEIVER - ENGINEERED

FOR THE AMATEUR Superheterodyne Circuit **Utilizing 8 Tubes** 

- BAND SPREAD FOR EASY TUNING
- BUILT-IN "S" METER WITH ADJUSTMENT CONTROL

& Rectifier Tube

- EXCELLENT SELECTIVITY
- ACCESSORY POWER SOCKET PROVIDED
- ALL TRIMMERS PRE-ALIGNED
- COVERS 455KC. to 31MC. IN FOUR BANDS
- VARIABLE AVC-BFO AND RF GAIN CONTROLS
- BUILT IN PRE-CALIBRATED "S" METER SWITCHABLE AUTOMATIC NOISE LIMITER

HE-10 WIRED AND TESTED 79.95 8.00 Down

KT-200 IN KIT FORM 64.50

6.45 Down

High sensitivity superheterodyne circuit utilizes 8 minioture tubes plus rectifier tube and transformer input, full wave rectifier. The 80-40-20-15 and 10 meter amateur bands are clearly indicated on the illuminated dial face, and can be easily tuned with the pre-calibrated band spread. The receiver has camplete band switching, thus eliminating the need for bathersome plug-in cails. Band spread is laid aut an easy-to-read 0-100 scale, and features a weighted cantrol knab which afters smooth, precise luning. Coverage of from 455 KC to 31 MC is obtained through the use of faur switchable ranges (455-1600 KC/1.6-4.8 MC/4.8-14.5 MC/10.5-31 MC). All cantrols, switches and phane lock are lacated on the front panel, while an aptianal accessory socket delivering 360 valts DC and 6-3 valts AC is lacated in the rear of the receiver. Sensitivity is 13 microvalts (Signal to naise ratio is 20 D8 at 3.5 MC) Selectivity is -60D8 at 1MC, image rejection is -40D8 at 3MC. Panel is grey metal with white lettering, and cantrols are black with aluminum frim. Hinged tap makes inside af receiver readily accessible to operator. 7%" H x 15" W x 9" D. Shpp. wt., 22 tbs.

KT-200 6.00 Dawn Net 64.50

### INDUSTRIAL TIMER SWITCH

Net 7.77

MS-82\_ Model T -108



This inexpensive fire clarm gives constant around-the-clock protection for family, home, factories, garages, barns, boats, and countless other applications. Installation is simple. Drive a laid or hook into woll and hang clarm by eyelet provided on back at large the provided on back at pensive flashlight battery and this is especially useful in places where is accurated by a simple factory admired installation of them is a simple factory and the is a simple factory and the provided of the provided in the



LEVEL - AN INCLINE MEASURE ... AT A PRICE ANYONE CAN AFFORD \_

● Accurate level and incline Measure ● One Man Can

Accurate level and incline Measure One Man Can Do Any Levelling Job A tool of a Thousand Uses with the Accurate level and incline instrument. It is precision-built. Measures incline correction is needed of a dime at 25 ft. It also shows how much correction is needed Sia dime at 25 ft. It also shows how much correction is needed Sia dime at 25 ft. It also shows how much correction is needed Sia dime at 25 ft. It also shows how much one man can do any tevelling to operate indications. Not precisely and thousand other uses. Truly a fracting contour strument for every complete brick mason and handy man. Shops.

4D-417—List 6.95
In Lot of 6.

Not 4.86
HO-441 Corrying Case for Henry Tracks

HO-441 Carrying Case for Hoppy Transit



### SCHAUER KAR- START



STARTS OR COLD ENGINES INSTANTLY

If you park your car outside in wet ar wintry weather, you need Kar-Start. At instant of start.

Ing. Kar-Start sends five times the normal amount ing. Kar-Start sends five times the normal camount of spark from your pluss for sure-fire starting only. It is automatically disconnected for starting only. It is automatically disconnected for starting only. It is automatically disconnected for starting only. It is suffered to distributors. Simply, easily installed with just 3 or distributors. Save your pattern, time and quick connections. Save your battery, time and temper. Shipping weight 1 b.

2-2476 for 6 V cars List \$7.95 net \$5.15



REG. VALUE 189.50. 139.50 TF-404 FOOT COMPROL-Starts and stops laps in "Record" or "Play"

TE-401 EAR PHONE—Fits either ear. Low impedants in the control of the control of

TAPE RECORDER • 10 WATTS PUSH-PULL OUTPUT! • MFR'S GUARANTEED SPECS!
• RESPONSE 40-15,000 CPS + 3 DR AT 7.5 IPSI • DISTORTION LESS THAN 0.8%! • WOW AND
FLUTTER BELOW 0.3% • SIMPLIFIED KEYBOARD CONTROL! • WEIGHS ONLY 18 LBS.!

MODEL T-1500 HI-FI TAPE RECORDER A really precision portable high fidelity recorder made by a famous manufacturer of precision aptics. This latest model T-1500 is made available, for the FIRST TIME AT THIS PRICE, BY measures 6½" x 10½" x 11½". Takes per second), dual track—pravides up to 4 hrs. of record or playbock time, to-noise ratio 48 db, 2 special hum balance cantrols; "Balanced Tones" high fidelity; exclusive high speed rewind lever, applied to the property of the substanding recorder include; signal, tape, 1 empty takeup real, radio-tv attachment card and hi-fi cable. For 110-120 volts, 60 cycles AC. Shap, wt., 21 bs. SK-707 STEREO KIT—In-line stereo head converts Model

MODEL T-151S STEREO HI-FI TAPE RECORDER


SK-707 STEREO KIT—In-line stereo head converts Model T-1500 for stereo playback. Includes stereo head, insulation, wrench, connecting coble and complete instructions. Shpg. wt., 1 lb. Net 31.05

MODEL T-151S STEREO HI-FI TAPE RECORDER
Same features as Model T-1500 except with the addition
of sterea head and a built-in secand preamp. Shps. wt.,
24 lbs, WOLLENSAK T-1500—Reg. 229.50. Net 167.50 ACCESSORIES FOR WOLLENSAK TAPE RECORDERS

FSC-405 CASE—genuine virgin vinyl, slip-over type case for Wollansok recorders Net 6.75

74. PROPER RELEARDERS
TF-908 MIXER-3 inputs. Mixes any combination of 3 mixes, phonas or radios.
A196-2 MIXE EXTENSION CORD—15' with Wollensuk plug and jack
A196-12 ATTACHMENT CORD — Connects radio, TV,
phono ar speaker to recorder
Net 2.25

### "PRESENTATION" NEW LAFAYETTE'S Complete with Leather Case, Earphone & Battery



. PERFECT BACK TO SCHOOL GIFT

- EARPHONE JACK-BUILT IN-FOR
- . ULTRA SMALL
- . PRINTED CIRCUIT
- · REFLEXED FOR ADDED GAIN

A highly sensitive, super-selective true pocket transistar radia that will surprise you with its performance over the complete broadcast band. The law law Lafayette price makes this a tremendous bargain! Perfect for back to school gift, or to give to your best friends, relatives. Of course, the all-transistar partable is your perfect camponian during your travels, or just for quiet listening in the hause. The circuit features reflex design far extra gain. Printed circuit construction offers trouble-free performance and extra long life. Handsamely encosed in a black matded case with galden grille and attractive windows for readings of valume level and tuning. Separate tuning and valume cantrals adds flexibility and ease of operation. Also provides a built-in PM speaker plus carphone jack, ferrite stick antenna, and special tuning condenser. Single lang-life 9 valt battery for economical service. Plug-in earphone cuts out built-in speaker for completely private listening. Complete with attractive, soft, leather case, an extra battery, and a sensitive high autput, crystal earphone with sanitary plastic ear-insert and 3' flexible card. 3 transistars and diedes. Size, 3% x 2% x 1½". Shop. Wt., 1 ib.


### SPECIAL SALE! ON FINEST GRADE IMPORTED BINOCULARS!

Each of these extremely precise aptical instruments has a coated lens — clamped in (not just glued) prisms — clamped in (not just glued) prisms — proof outer covering. Made to our own rigid specifications, lefayette's famous maney-back guarantee applies as always! Focus: Either central focus (C.F.) by means of a single wheel and one adjustable eyepiece, or individual focus (I.F.) wherein both eye pieces are isomorphisms, and individual focus (I.F.) wherein both eye pieces are isomorphisms, and individual focus (I.F.) wherein both eye pieces are isomorphisms, and in the proof of the single will appear 7 times larger (or closer). Second number will appear 7 times larger (or closer). Second number meters, of the abjective lens.

Coated Lenses — tend to reduce reflection and poss up to 50% more light than uncoated lenses! W.A. — Wide-

	are light than uncoate	e reflection and lenses.]*W.A t L.W. = E	d pass up .= Wide.
STOCK No. F-182 F-183 F-184* F-164 F-118† F-185	0. TYPE 6 X 15 J.F. 7 X 35 C.F. 7 X 35 C.F. 4 X 35 C.F. 8 X 50 C.F. 16 X 50 C.F. Add 10% Fed. Tax	2 lbs. 3 lbs. 3 lbs. 3 lbs. 3 lbs. 3 lbs. 3 lbs.	MET EACH 10.75 19.95 27.50 22.50 29.50 32.50





## rfayette 3

### TINY 6-TRANSISTOR RADIO

PLENTY OF POWER IN THIS SMALL PACKAGE!!



- PUSH-PULL AUDIO OUTPUT FOR FAITHFUL TONE QUALITY
- EARPHONE JACK—BUILT IN—FOR PRIVATE LISTENING
- FULL TONE DYNAMIC SPEAKER
- BUILT-IN FERRITE BAR ANTENNA
- TROUBLE-FREE PRINTED CIRCUIT
- SUPERHETERODYNE CIRCUIT
- HIGHLY STYLED PLASTIC CASE

ECONOMICAL—USES ONLY ONE BATTERY

REGULAR \$48.50 INCLUDING EARPHONE BATTERY AND

CARRYING CASE

True superhet circuit with push-pull audio output powers either the built-in dynamic speaker or the personal-type earphone. The trouble-free printed circuit utilizes six ultramodern transistors plus germanium diode. Built-in ferrite-rod antenna brings in distant stations like locals. Single long-life 9 volt battery for economical service. Uses standard Burgess 2U6 or RCA VS 312 replacements.

Housed in smartly designed black and white case of durable plastic with gold-to-ned speaker grille. Soft leather carrying case with attached earphone pouch. "On-off-volume" control plus stylized tuning dial. Coverage 530-1600 kc. Just 4¼" high x 2¼" w x 1½" thick and weighing a mere 12 ounces — a true purse/pocket portable. Lafayette "Tiny" 6-Transistor Radio — including battery, carrying case, and earphone for personal listening. ... all at an unbelievably low price! FS- 200 "Tiny" 6-Transistor radio

Net 24.95

### **NEW! SENSITIVE** DYNAMIC EARPHONE SUPER VALUE

FOR TRANSISTOR RADIOS

PENJOY PRIVATE LISTENING OURABLE AND

ATTRACTIVE

A sensitive fine quality corphone designed to be used for all types of transistor radios. Pravides excellent listening pleasure at an unbelievably low price—clear reproduction of music as well as speech, with a pleasing tone quality. This lightweight miniature earphone is comfartable to wear. A flexible polyethylene support holds the receiver securely in place for either ear. Complete with sanitary plastic ear-insert and 3½ flexible card and phono plug. Impedance is 6 ahm. Shpg. wt., 6 az. Shpg. wt., 6 az. MS-591

### 3-TRANSISTOR **MINIATURIZED** HEARING AID

la fuyette



HELP FOR THE HARD-OF-HEARING AT A PRICE TO SUIT ANY BUDGET!

0

6 TRANSISTOR

Now you can enjoy radio and TV programs, chats with friends and neighbors, church, the movies — because this efficient three-transistor hearing aid amplifies and improves the intelligibility of your world of sound.

• A convenient "on-off" switch and volume control permits adjustment to meet individual preferences and degrees of hearing impairment.

• This low, low price includes a miniature dynamic earphone fitted with two detachable rubber-covered earplugs of different sizes (to insure individual fit and maximum wearing comfort) and a three-foot cord of inconspicuous colorless plastic.

• A single, inexpensive "penlite" battery will operate this hearing aid for hours. Spare battery and zippered carrying case are supplied at no extra cost.

F.390 3-Transistor Hearing Aid — a \$50.00 value — now only

Net 19.50

Extra battery for Above: burgess Z or RCA VSO34

Net .08 ea.

### **NEW! 4-TRANSISTOR MINIATURE** HEARING AID





LIGHTWEIGHT AND POWERFUL—A REAL BOON TO THE HARD-OF HEARING • WEIGHS ONLY 5 02.—SMALLER THAN A PACK OF CIGAR.

ETTES • USES ONLY 2 SMALL LOW-COST FLASHLIGHT CELLS • QUALITY AND PRECISION BUILT FOR YEARS OF OUTSTANDING PERFORMANCE • ECONOMICAL IN COST AND UPKEEP

A campletely self-contained modern hearing oid whase power and sensitivity will appen up o "new world" far those with even severe hearing loss. Small enough to be carried in a breast pocket, it weigh anly 5 oz. Complete with batteries. Only 2-3/16" wide x 2-13/16' long x liesh-colored dynamic earshone fits snugly into the ear, and o 3-foot long thin flexible cord is supplied, with plugs at both ends. Internal electronic companents are pratected by a clear plastic cover which keeps the hearing aid dust and maisture free—while making inspection and service easy. A smoothly operating valume control permits easy adjustment far the various requirements of doily living. The alumite cose is extremely hond-some and finished in gold by a special pracess to prevent peeling and rusting. A good-looking gray leather zipper carrying case is also supplied. Uses only 2 pen-light battery cells, low-cost and replaceable onywhere, yet battery life is approximately 2 manths with a rate of use of 4 haurs per day! Shpg. wt., 1 lb.

F-360—Hearing Aid.

Net 29.50 Net 29.50

Burgess Z or RCA VSO34 (2 required)...

REGULAR CATALOG PRICE\_\$23.47

BATTERY FOR ABOVE

.Net each .08

### FANTASTIC SAVINGS! 62% OFF! FAMOUS GE GC-7 DIAMOND STEREO CARTRIDGE



Lafayette shatters carof the year. For less than the price of the diamond needle alone you can have the famous General Electric magnetic GC7 (.7 tridge. Ideal as a replace- antees. ment cartridge, for conver- General Electric GC-7 1.7

tridge. Frequency response is

20-17,000 cycles. Features tridge prices with this ste- high channel separation and excellent compliance with low record and stylus These are genuine GE GC-7 diamond needle cartridges backed up by both the GE MIL) diamond stereo car- and famous Lafayette guar-

sion to stereo—or at this low MILI Diamond Stereo Carprice, buy it as a spare car-, tridge. Shpg. wt., 1 lb.



### NEW! LAFAYETTE 4 TRANSISTOR INTERCOM AND ELECTRONIC BABY SITTER



• 4 TRANSISTORS • NO HUM, NO HEAT • NO SHOCK HAZARD PRINTED CIRCUIT BOARD . NO WARMUP DELAY . 3" SPEAKERS

• EXTRA SMALL • 1 THERMISTOR

Extra features . . . tap performance . . . portability . . . long battery life . . . ideal for hame and affice. Perfect as a portable unit . . . for the summer cattage . . backstage for ance-a-year amateur theatricals . . . as well as permanent installation . . . office to affice . . . kitchen to bedraam. This is a complete transistor intercom system, consisting of a master station and a remate station. Specialized circuitry allows each unit to call the other (remate can call the master even when it is turned off) while requiring only a 2-canductar wire far interconnection. Completely transistorized. Requires only 6 valts from built in, easily replaceable batteries far many months of reliable operation. Elimination of all power line connections prevents all shock hazard and makes this unit safe to use everywhere. Master station has a valume cantral and function switch with 3 positions. Talk, far speaking to remate; listen, for manitaring the remate (boby sitting, etc.); and standby which turns off the power to canserve batteries. Zera warmup time means the unit is ready for aperation. When the unit is turned off, the remate can call the master by depressing its call switch; a pleasant musical tane alerts the master that it is being called. Trauble-free long-life printed circuit board, carrect omount af negative feedback, and push-pull output circuit. Big 3' speakers are used for aptimum naturalness and intelligibility. Each unit is housed in an attractive two-tone case, measuring 5 x 4½ x 3½. Camplete with page 1.

#### NEW LAFAYETTE "ANNOUNCEOCOM" 4-TRANSISTOR INTERCOM

PA-72. The moster unit is same os obove, but the remote unit is hermetically sealed so that it can be placed outdoors. A push-but-tan buzzer oterts the moster inside the hause, and intercomunication can proceed os described above. Net 24.95

24.95

### LAFAYETTF RADIC

165-08 LIPF 

BULK RATE U. S. POSTAGE PAID

New York, N. Y. Permit No. 8486

