# HOLIDAY VALUES!




### IT'S A WINNER!

NEW LAFAYETTE "TINY" 6-TRANSISTOR RADIO

- 6 ULTRA-MODERN TRANSISTORS PLUS GERMANIUM DIODE
- VEST POCKET SIZE-ONLY 4" H X 21/2" W X 11/4" D
- EARPHONE JACK BUILT IN FOR PRIVATE LISTENING
- . FULL TONE DYNAMIC SPEAKER
- . TROUBLE-FREE PRINTED CIRCUIT
- BUILT-IN FERRITE BAR ANTENNA . SUPERHETERODYNE CIRCUIT

Engineered and constructed with the jewel like precision of a fine watch . . . true superhet circuit with push-pull audio output powers either the built-in dynamic speaker or the personal-type earphone. The trouble-free printed circuit utilizes six ultra modern transistors plus germanium diode. Super sensitive . . built-in ferrite-rod antenna brings in distant stations like locals. High on power, low on battery drain . . employs single long-life standard 9 volt battery for economical service. Housed in smartly designed black and gold case of rugged, durable plastic. Soft leather carrying case with attached earphone pouch. "On off" volume control plus large easy to read tuning dial. Covers 5.50-1600Kc. Just 4" H x 2½" W x 1½" Thick and weighing a mere 10 ounces—a true purse/pocket portable. Lafayette "Tiny" 6-Transistor Radio—including battery, carrying case, and earphone for personal listening . . all at an unbelievably low price! Shpg. wt., 2 lbs.



Just think ... simply by combining this handsome speaker unit with your FS-206 "Tiny" Transistor Radio, you have an attractive Cordless Transistor Table Radio. The large 4" speaker provides a sound quality that is equal or superior to the best table radios. Beautifully styled and finished in an attractive cherry mahogany wood, this unit is perfect for use anywhere in your home ... an excellent table radio or simply by unplugging the FS-202 you have a pocket size portable. Size: 8" H x 10%" L x 4" D. Shipping weight 4 lbs.

SK.144 Cordless Radio Enclosure.

SK-144 Cordless Radio Enclosure. . . . . Net \$6.95

THE PERFECT COMBINATION Lafayette FS-206 "Tiny" Transistor Radio and Ski444 Cordless Radio Enclosure. Shipping weight 6 pounds. FS-205 2,00 Down \$28.95



2.00 Down INCLUDING EARPHONE BATTERY AND CARRYING CASE



### 900 X "MICRO-PREP" KIT

- 100X to 900X IN 7 RANGES
   BUILT-IN SUB-STAGE LIGHT
- 2 MATCHED EYE PIECES
- INCLUDES DISSECTING SET,
- SPECIMEN, SLIDES

Manocular tube design made to educational standard. Uses geared rack and pinion far facusing. Coaxial knab adjusting the period of the period

### **NEW! Cine "X" Meter**

- Mounts on Turret!
- Direct Reading!
- Accurate— 7.75

### BSR MONARCH BSR

4-SPEED STEREO RECORD CHANGER COMPLETE WITH RONETTE STEREO TURNOVER CARTRIDE

SPECIAL SALEI

DIAMOND NEEDLE 24.50

• FULL INTERMIX IN ANY ORDER • PLAYS BOTH STEREO AND MONAURAL RECORDS

The newest British made BSR Manarch featuring heavy duty 4-pole induction motor; with rumble-free, waw-less, law hum, automatic aperation. Design and construction assure trauble-free aperation and lang life. Camplete with Ranette's famous campatible stered turnaver cartridge with dual sapphire styli.



NEW! 1960 "Holiday II" 8mm TRIPLE TURRET CAMERA WITH Electric Eye METER

- \* BUILT IN DIRECT READING Electronic
- \* RATED . . . "Best Movie Camera Value"! NOW'S THE TIME - Move Up To "MOVIES"!

44.88 Reg. 59.95

• 3 Fast-Fixed Focus—f1.8 Lenses! • 3 Built in Filters!
• Picture Window "Multi-View" finder!
• Simple "Read-Set-Shoot" Action!
• "Drop-in" Spool Loading!

Note: For PROJECTOR see page 46

fayette 165-08 LIBERTY AVE. JAMAICA 33, N. Y. **AXtel 1-7000** OPEN MON. AND FRI.

TILL 8:45 P.M.

CATALOG

NEW YORK 13, N.Y. BOSTON 10, Mass.

100 6th Ave. WOrth 6-5300 Open THUR. 'til 8:45 P.M.

110 Federal St. **HUbbard 2-7850** Open MON.-WED. 'til 8:45 P.M.

OTHER LOCATIONS

**BRONX 58, N.Y.** 542 E. Fordham Rd. FOrdham 7-8813

NEWARK 2, N. J. 24 Central Ave. MArket 2-1661 Open THUR. Open WED. 'til 8:45 P.M. 'til 8:45 P.M.

PLAINFIELD, N.J. 139 W. 2nd St. Plainfield 6-4718 Open THUR. 'til 8:45 P.M.



#### NEW SCOTT 299

#### COMPLETE STEREO AMPLIFIER

Features dual 20 watt ampliflers and dual preampliflers on one chassis. Includes a 3rd channel output for the ultimate in stereo reproduction. Has separate Bass and Treble controls for each channel; low level stereo cartridge inputs for cortridges with exceptionally low outputs; Balance Control for precisely balancing both channels; Master Volume Control with loudness switch for tonal balance; Phase Reversal Switch: corrects reversed phasing an improperly made recordings; Master Function Selector switches to: stereo records lo-level of hi-level cartridges, stereo FM/AM broadcasts, use aff stereo cartridge for monaural records, for a monaural source through both amplifiers. Unit is also used as a manaural electric crossover. Inputs: 2 low-level, 2 high channel. Outputs: Tape recorder autput: center channel autput, and speaker impedance of 4, 8, and 16 ohms/ for each channel. Freq. Response: 20.30,000 cps. Power output per section 20 watts, 40 watts peak; Harmonic Distortion: 0.8%; IM 0.3%. 11 tubes Size: 4%" x 15" x 12" x 12". Shaps. wt., 35 lbs.

G-135WX 299—Less Case 5.00 Dawn Net 1	99.95
G-147W C Steel CoseNet	
G-149W CW Mahagany CaseNet	
G-151W CWB Blande CaseNet	
G-150W CWW Walnut CaseNet	19.95

#### NEW SCOTT 222 24 WATT STEREO AMPLIFIER



This is a new 24 watt Stereo Amplifier (12 watts per channel) with numerous features found only on more expensive amplifiers. Dual preamps and control facilities provide complete flexibility in the control and reproduction of all stereo or monaural sources. Outputs are available for stereo tape recording plus a third channel output for connection to another amplifier to provide the ultimate in stereo realism. Loudspeaker output impedances are 4, 8 and 16 ohms for each channel. Inputs: 4 dual (3 high level, 1 low level) Mag High, Mag Low, Tuner, Tape Playback. Outputs: Tape Out (dual) Center Channel (single). Specifications: Frequency response; 20 to 20,000 cps; Harmonic Distartion; loss than 0.8% at 12 watts output; IM 0.3% (CCIF method); all aluminum chassis and DC on preamplifier tube heaters result in a hum level of 80 db below full output; Phono sensitivity 3 my for full output; Size; 13½" wide x 5" high x 9½" deep. Shpg. wt., 24 lbs.

G-137WX 222—Less Case .... 5.00 Dawn .... Net 139.95 G-147W C Steel Case ......Net 9.95

#### NEW BOGEN DB212 24 WATT STEREO AMPLIFIER



With this "Stereo Control Center" you can precisely control all stereo sources and feed them through the self cantained dual amplifiers to your speaker systems. When you use monaural program sources you have 24 walts of power available to the speaker system. You can also feed an channel monoaurally through the tweeter and mid-range speakers, and the other monaurally through the low range speaker. Output Power; 24 watts (two 12 watt channels) peak power 48 watts. Harmonic Distartion: 0.5% at raided output. Frequency Response: 20 to 20,000 cycles ± 1 db. Speaker Output: 4, 8, and 16 ohms. For Controls: Boss ± 10 db at 60 cycles; Treble ± 10 db at 10,000 cycles. Controls: 4 position selector switch (tape, phono, radio, aux.); Function switch (Monaural: Channel 1, Channel 2, Channels 1 and 2; Stereophonic; normal, inverted). Volume; Bass; Treble; Hi-filler (flat, 4 kc). Lo: Gitter (flat, 100 cps); Speaker (2 position). Power on-off switch. Tubes: (9) two 12AX7/7025, two 6U8, four 6V6GI, one E281. Dimensions: 15" W x 4%" H x 12%" D. For 110-120 V. 60 cycles AC. Shpg. wt., 20 lbs. G-186W BEG Chinter with Lar.

G-185WX DB212—Less Cabinet..5.00 Down.Net 119.95 G-186W BEG Cabinet with legs .......Net 7.50

#### NEW BOGEN DB230A 60-WATT STEREO AMPLIFIER

SEPARATE BASS AND TREBLE FOR EACH CHANNEL

DUAL VOLUME CONTROLS




The ultimate in a sterea amplifier for top quality and design. With this system you can control all types of stereo and monaural program sources, and feed them through the dual 30-watt amplifiers. When you use it monaurally you have the combined 60 watts available, with a special switching arrangement for monaural phona cartridges. Features are CFF output circuit, Phasing Switch which eliminates hole in middle effect, a provision far remate balance cantrol. Specifications: Pawer Output: 30 watts (60 watts peak) each channel far stereo. 60 watts (120-watts peak) for manaural. Harmonic Distartion: less than 1% of rated output. Frequency Response: 20 to 20,000 cps. ± 0.5 db. IM Distartion: less than 2% of rated output. Hurn and Noise: (below rated autput) fundamental —85 db. Inputs: (10 Inputs—5 channel 1 fundamental —20 magnetic cartridge, crystal cartridge, tape, tuner, auxiliary. Outputs: channel 2 tape. Dimensions: 15" W x 5%" H x 13%" D. Shpg. wt., 39 lbs.
G-187WX DB230A—Less Cobinet—5.00 Down speaker, channel 1 13%" D. Shpg. wt., 37 15" W x 5%" H x 13%" D. Shpg. wt., 37 G-187WX DB230A—Less Cobinet—5.00 Down Net 189.50

G-188W CEG Cabinet with Legs

NEW! Jafayette 50-WATT

STEREO AMPLIFIER MODEL LA-250

Impressive Performance . . . Handsome Styling . . . Another Unbeatable Lafayette

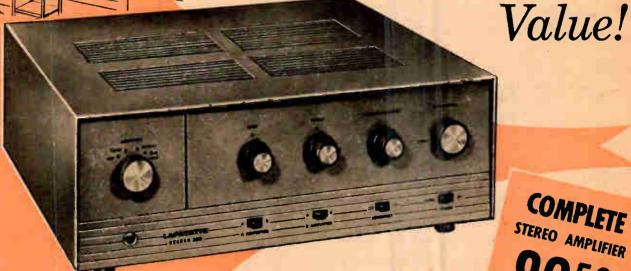


• 50 WATTS MONAURAL—25 WATTS EACH STEREO CHANNEL • RESPONSE 17-21,000 CPS ± 1 DB (at normal listening level) ● UNIQUE "BLEND" CONTROL ● PREMIUM EL86 OUTPUT TUBES . SEPARATE BASS & TREBLE CONTROLS • CLUTCH-TYPE VOLUME-BALANCE CONTROL ● 3RD CHANNEL OUTPUT

COMPLETE STEREO AMPLIFIER

COMPARABLE TO AMPLIFIERS COSTING UP TO 179.50

# The Stereo 25



SPECIFICATIONS: POWER OUTPUT: 50 Watts—25 per channel Institute of High Fidelity Manufacturers Rating (100 Watts peak). FREQUENCY RESPONSE: 17-21,000 Cps ± 1 db (at normal listening level). HARMONIC DISTORTION: Less than 1%. HUM and NOISE: 75 db below rated output at full valume (high level inputs). CHANNEL SEPARATION: Greater than 50 db. OUTPUT IMPEDANCE: 4, 8, and 16 ohms per channel.

Attractive beige vinyl faminated steel case. Handsomely designed brass anodized aluminum front panel. Sienna brown molded legs and matching knobs with polished brass inserts. Dimensions with legs and knobs, 14½" w x 12½" d x 5½" h. Shpg. Wt., 26 lbs.

LA-250WX..... ..... 5.00 Down

## THE MFISHER



#### NEW! MODEL X-101A STEREO MASTER CONTROL AND DUAL 20 WATT AMPLIFIERS

Features separate Bass and Treble control for either ganged or independent channel operation. Has 12 inputs or 6 pairs for stereo. 3 record-monitor jocks, 8 controls plus six chassis adjustments. Has input selector (78, LP, RIAA-1, RIAA-2, Tape, Tuner, Aux-1; output selector; (Rev., Std., Channel A + B, Channel B + A); rumble filter; Vol./AC power; channel balance; lauduess; separate bass and treble for each channel. Freq. response: 20-20,000 cps. Distortion: 0.7% at rated autput, 50 db channel separation. Hum and noise inaudible. Sensitivity: 3 mv far phana, 2 mv far tape, 0.2v far high level to obtain rated output. Less cabinet. Size: 15% x 43% x 13". Shpg. wt., 30 lbs. output, Less capiner, U.S.
30 lbs.
G-108WX X-101A—Less Cabinet—5.00 Down
Net 194.50

G-101W 10U Cabinet (Specify Finish)—2.00 Down
Net 24.95 G-103W TA-6 Metal Cabinet ...

COMPLETELY NEW! THE FISHER 600 STEREO FM-AM TUNER AMPLIFIER



Designed far those who want the canvenience of an allin-ane instrument, the new Fisher 600 incorporates a stereo FM-AM Tuner, Master Audio Control and a 40 Wott Stereo Amplifier on one compact chassis. Dual tuning arrangements permit the ruse of the unit as an individual FM or AM tuner. Input level adjustments are furnished for all input connections to the Fisher 600. The amplifier section features two welf-designed 20 watt amplifiers with cannections far 4, 8 ar 16 ohm speakers. Features included in the Tuner: Cascode RF Stage on FM; Bridgetype low-noise triade mixer; Individual MicroRay tuning indicators for FM and AM; Features included in the Amplifier: 5-position input selector: 5-position Stereo-Monaphanic switch: Dual bass and treble controls; Phase Reversing switch; DC filament Supply for minimum hum; Frequency response, 25 to 20,000 cps ± 1db. Dimensions: 17" W x 14½" D x 3-13/16" M., Far 110-120 V 60 Cycles AC. Shpg. wt., 42 lbs.

### harman kardon

NEW! "CHORALE" A260 DUAL PREAMP & DUAL 30-WATT POWER AMPLIFIERS



PRINTED IN U.S.A. . ENTIRE CONTENTS COPYRIGHTED 1959 BY LAFAYETTE RADIO ELECTRONICS CORPORATION . 165-08 LIBERTY AVE., JAMAICA 33, N. Y.

# LAFAYETTE FOR LEADING STEREO COMPONENTS

## NEW! Jafayette 50-WATT COMPLETE STEREO PHONO SYSTEM

The Excitement and Realism of The Concert Hall!



#### SELECT YOUR OWN CARTRIDGE









You may substitute any of the above cartridges at no additional cost.

LAFAYETTE

FAMOUS

# COMPLETE STEREO SYSTEM

### YOUR **GUARANTEED BEST** STEREO SYSTEM BUY!

LAFAYETTE LA-250 50-WATT STEREO AMPLIFIER . . . GARRARD RC121/11 STEREO CHANGER . . . . . . NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE . LAFAYETTE PK-111 WOOD CHANGER BASE . . . . . 2-LAFAYETTE SK-58 FAMOUS FREE EDGE 12" COAXIAL SPEAKERS at 29.50 . . . . . . . 59.00

Regular Catalog Price 218.55

#### You Save 44.05

This superb system will add a new dimension in living to your home with all the excitement and realism of a live concert. The new Lafayette LA-250 50-watt stereo amplifier (25 watts each channel) farms the heart of this autstanding stereo hi-fi phonograph music system—the features, versatility and advanced circuitry of this unit are second to none—all the necessary inputs and outputs are provided if you wish to odd stereo tape and stereo FM/AM later. A unique blend control allows continuously variable channel separation—from full monaural to full stereo. Also included is the famous Garrard RC121/11 intermix 4-speed automatic record changer with full manual or automatic operation supplied with your choice of stereo cartridges. Pickering 371.7D (.7 mil) diamond stereo cartridge, Pickering 371.7D (.7 mil) diamond stereo cartridge, Pickering 371.7D (.7 mil) diamond stereo cartridge, Surp M7D (.7 mil) diamond stereo cartridge, Surp M7D (.7 mil) diamond stereo cartridge. Sure M7D (





### Mentosh McINTOSH C20 STEREO COMPENSATOR



Full stereo flexibility is pravided plus built-in protection for your investment in monophanic records. Mode Selector has 6 positions. Internally decouples stereo phono cartridge to offer best-quality reproduction from monophanic records. Separate that has been controls to balance the frequency response of the system independent of front panel controls. Equalization: Individual bass and treble 6 position switches, including NAB tape and flot for any low level flat source. Provides Fletcher-Munsen compensation, continually variable. Rumble filter and 2-position (9KC and SKC) high frequency cutoff to suppress hiss and noise. 180° phase reversal control. Tape: Front panel jacks, push button switch controlled, to permit the addition of parable recorder, Tape Monitor. Freq. Response: ± 0.5 db 20 to 20 KC. Distartion less than 0.2% at rated autiput. Hum and noise inaudible. Outputs: Main—2.5V with rated input, tape—0.25V with rated input, tape—1.5V with rated input. Fower requirements: 17VAC, 35 watts. A.C. Aux. Outlets: 1 unswitched and 3 switched. Less Case. Size 14½ x 12 x 4″. Shpp. wt, 19 lbs.

Model 1-55. Cabinet for C20 in mahagany or walnut. Shpg. wt., 5 lbs. Specify finish.
G-174W 2.00 Down

#### McINTOSH MC-30 30-WATT AMPLIFIER



Superlative Amplification with 1M distortion at 1/3% and Harmanic Distortion at less than 1/3%. Input sensitivity 0.5 volt with gain control. Frequency Response ± 1 db between 15-50,000 cps. Hum and noise are -90 db Amplifier outputs of 4, 8, 16 ond 600 ohms (balanced). Tubes are 2-12AX7, 12-AU7, 12-BH7, 2-1614, 5 U4GA (Rectifier). Chrome and black finish. Dimensions 131/6" x 8". Power consumption 155 watts, 117/125v, 50/60 cycles AC. Shpp., wt., 34 lbs.

.. 5.00 Down ...... Net 143.50

#### McINTOSH MC-60 60-WATT AMPLIFIER



# afayette) presents

### THE LONG, LOW LOOK IN HIGH FIDELITY CABINETRY ... as a One-Piece System or in Separate Units, The Finest in Cabinets for Fine Music Systems.











Custom designed to component grouping. ample ventilation for

- DESIGNED TO ACCOMMODATE THE WIDEST RANGE OF HIGH-FIDELITY COMPONENTS TWIN SELF-BAL-ANCING LIFT LID COMPARTMENTS
- COMPLETE VERSATILITY-ADAPTS TO ANY ROOM AR-
- ADJUST-A-PORT ALLOWS PRECISE TUNING OF PORT TO MATCH ANY SPEAKER SYSTEM
- ► HAND-RUBBED 3/4" HARDWOOD VENEERS

PAINSTAKING ACOUSTICAL ENGINEERING plus THE GRACE AND BEAUTY OF DISTINCTIVE CONTEMPORARY DESIGN ... have been integrated into these striking units by expert furniture craftsmen. Optional in seperate units or as a complete one-piece ensemble, these versotile cobinets will adapt to any room arrangement, accoustic requirement, or personal preference. Speaker enclosures accept 12" or 8" speakers and have provision for mounting separate tweeters. An adjustable port is featured which provides precise tuning of the enclosure in order to match any speaker system. The equipment cabinet is engineered to accommodate the widest range of components [manophonic or stereophonic) ... separate amplifier — tuner and player sections with twin self-bolancing lift lids provide for vertical mounting of omplifier and tuner plus an adjustable mator board for turniable, record changer or tape deck. Cabinets are constructed of genuine hand-rubbed 3/4" hardwood veneers with graceful bross pulls and leg ferrules. Chaice of Walnut, Mahagany or Natural finishes.

Equipment Cobinet — Dimensions: 37"W x 183/"D x 261/2"H. Amplifier Tuner section measures 171/2" x 13" x 171/4"D. Player section is 171/4"W x 161/2" front to back. When ordered with components, the cabinet will be precut upon request for the Lafayette HF-681 or HF-682 Stereo Systems as described above- [Please specify finish] Shpg. wt. 87 lbs.

CAB-108WX 5.00 Down Net 89.95

CAB-108WX 5.00 Down Net 89.95
Speaker Enclasure — Dim, 171/4"W x 183/4"D x 261/3"H (Specify finish) wt., 45 lbs.
CAB-109WX 2.00 Down Net 44.95

COMPLETE ENSEMBLE

All three enclosures cambined as a beautiful Ensemble system on a 72" wide base 18½"D x 27½"H. When ordered with components, the Ensemble upon request will be precut for Lofayette HF-681 or HF-682 Stereo Systems. Shpg. wt , 190 lbs.

.. Net 189.80

### **NOW Lafayette COMBINES THE** INCOMPARABLE QUALITY of COMPONENT STEREO HI-FI with the ELEGANCE of Custom Cabinetry.

GARRARD RC121

Custom Crafted Cabinets Individually Tailored For YOUR HOME . YOUR TASTE and YOUR BUDGET

319.50 10.00 Down COMPLETE STEREO ENSEMBLE





Slide-Out Drop Front plus Pull-Out Record Section are custom features designed to protect your valuable components.



Entertoinment Center or utilize separately to suit your own room arran ment. Modular concept permits the addition of more units at ony time.

DESIGN FLEXIBILITY...place cabinets together as a complete Home



LAFAYETTE HAS REFUSED TO COMPROMISE . . . . you need not sacrifice your taste in fine furniture in order to achieve component sound quality, nor compromise beautiful music for fine cabinetry. The performance of these brilliant cobinet systems is in every respect the equal of Component Quality. Until now, such perfection has been enjoyed, only by the Hi-FI enthusiast who reproduced stereo music with a combination of separate components — Lafayette's audio experts have integrated these very same components into a series of accustically correct decorator styled cabinets.

Bring the full beauty and realism of stereo into your home with these luxurious custom crafted cabinets and matched components integrated into a superb STEREO ENSEMBLE.

superb STEREO ENSEMBLE.

The new Lafayette LA-250 50-Watt stereo amplifier (25 we each channet) provides every autstanding feature you could ask for an amplifier. Response 17-21,000 cps; less than 1% distortion.

► The famous Garrard RC121/11 4 speed Automatic record changes is supplied with the new GE VR-227 stereo cortridge for perfect reproduction.

Each individual unit is a complete beautifully finished cabinet in achieved. The equipment-speaker units fit together perfectly or may be placed separately in the room to suit your own arrange-ment for stereophonic or monophonic reproduction. The speaker enclosure is acoustically designed to house up to a 12" speaker or speaker system. The equipment cabinet is built to hause pre-amplifier and/or amplifier, tuner, or tape recorder-player-and transcription table or record changer.

A removable shelf is provided which is adjustable in height for mounting separate components.

Equipment Cabinets: Inside Dimensions are 18% "W x 13%"H.
Overall size: 20"W x 321/3"H x 18"D. Shpg. wt., 55 lbs.

CAB-87WX Walnut, CAB-88WX Mahagany, CAB-89WX Blande, CAS-90WX Ebony. (Specify Finish.)

5.00 Down T Adapter Board — Converts equipment cabinet for use with 12"

transcription turntable. (Specify Finish.)
CAB-91W

Speaker Enclosure: Dimensions 20"W x 321/2"H x-10"D. Shpg wt., 50 lbs.
CAB-115WX Walnut, CAB-116WX Mahagany, CAB-117WX
Blonde, CAB-118WX Ebony. (Specify Finish.)
Net 49.95

LA-250

STEREO AMPLIFIER

## STEREO CLASSIC CONSOLE SYSTEM

OPTIONAL TUNER

A Lafayette Special Stereo Value!





OPTIONAL TUNER

COMPONENTS	
GE G-7600 40-WATT STEREO AMPLIFIER	139.95
GARRARD RC-121/II STEREO RECORD CHANGER	41.65
GE VR-227 (.7 MIL) DIAMOND STEREO CARTRIDGE	24.45
2-GE G-506 SPEAKER SYSTEMS @ 127.35	254.70
WOODBASE CUT FOR RC-121	3,95
Regular Catalog F	rice 464.70

SYSTEM PRICE 372.56 10.00 Down

### lafayette BRINGS YOU A COMPLETE CUSTOM STEREOPHONIC MUSIC CENTER

10.00 Down









OPTIONAL TUNER

A triumph of custom cabinet design and imaginative engineering . . . for this is no ordinary commercial console. Speaker enclosures are acoustically isolated, in effect they are literally cushioned and floated on live rubber inside the main enclosure. Thus all resonance created by the speaker is prevented from reaching the sensitive elements of the rest of the system. Stereophonic Music Center includes these famous Lafayette Components: new Lafayette LA-250 50 Watt Stereo Amplifier, Garrard RC 121/11 Aspead Record Changer with new GE VR-227 stereo cartridge and two famous Lafayette SK-S8 12" Coaxial Speakers. (Refer to HF-681, pg. 3 for complete information on these components.) Furniture crafted of selected woods, this compact, integrated all-in-one console utilizing these individual stereo components will provide a beautiful addition to your home. Size 54"W x 32½" x 18"D. Specify Walnut, Mahogany, Blande or Ebony finish. Supplied with complete instructions. (Cabinets and equipment are separately packaged to insure safe shipment) Shpg. wt., 243 lbs.

HF-749WX

10.00 Down

Net 329.50

Net 449.50

# FANTASTIC VALUES in PHONOGRAPHS and

# **RECORD CHANGERS**



Plays up to 12" monaural records at 33%, 45 or 78 RPM. A single lever selects any speed. The lightweight pickup arm is equipped with a single all-purpose needle for all records. Has volume control with anoff switch. Fine quaity Alnico 5 PM speaker. Attractive teatherette covered case. For 117 volts, 60 cycles. Size 12" x 10%" x 5%". 5hpg. wt., 9 lbs.

LAFAYETTE STEREO PHONOGRAPH · Compatible—Plays Both Stereo and Manaural

2 Detachable Speakers




#### LAFAYETTE'S FINEST PORTABLE PHONOGRAPH

- PLAYS BOTH STEREO AND MONAURAL
- FULLY AUTOMATIC GARRARD CHANGER
- TWO POWERFUL 10 WATT AMPLIFIERS
- SECOND SPEAKER EASILY DETACHED

PH-128WX 5.00 Down

Net 89.50



#### LAFAYETTE **AUTOMATIC STEREO** PHONOGRAPH

Compatible—Plays Both Stereo and

Compatible—Plays Both Stereo and Monsural Records
 Detachable Lid With 2nd Speaker
New, attractively styled automatic stereophonic phonograph featuring the latest Monarch 4-speed automatic intermix record changer. Complete with stereo crystal furnover carridge with dual sapphire styll. Plays both stereo and monoural records. Among many features are outomatic record intermix mechanism, automatic mater shut-off at the end of last recard, automatic arm return, free-floating motorboard eliminating occustic feedback. Careful design assures long life and freedom from trouble. Takes all record sizes, and plays all 4 speeds: 16-2'3, 33-1/3, 45 and 78 RPM. Cantrols include separate volume cantrols for each channel and dual channel tane control. Built-in Alnico 5 PM speaker is housed in the removable phonagraph cover. 8 ft. cable supplied, permits placement of secand speaker for aptifium stereo effect. Two tane branze bark and ivary cabinet. Tubes 2-50C5, 1-12AX7 and rectifier. Size 161/5" x 131/5" x 83/4". Shpg. wt., 25 lbs.

PH-133WX 200 Down Net 95000 25000

# LAFAYETTE RECORD CHANGER SALE!

Nationally Advertised

4-SPEED AUTOMATIC RECORD CHANGER

COMPLETE WITH THE BRAND NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE





Regular \_68.00 Special 39.95 Only \$2.00 Down

ANOTHER FABULOUS BUY of Lafayettel This is a brand new current changer made by a famous manufacturer, plus the new General Electric VR-227 (.7 Mill) made by a famous manufacturer, plus the new General Electric VR-227 (.7 Mill) manufacturer for the finest reproduction from both stereo and Diamond Stereo Cartridge, offering the finest reproduction from both stereo and Diamond Stereo Cartridge features 20-17,000 cps response, —30 db channanoural records. This combination is priced to law that nel separation, tracks at 5 to 7 grams. This combination is priced to law that we DARE NOT mention the manufacturer's name. This deluxe changer features we DARE NOT mention the manufacturer's name. This deluxe changer features we DARE NOT mention to the deluxe changer features and automatic intermix of different size records, a multing switch, click filter, and automatic shutoff offer the lost record is played. The heavy rim-weighted turn-dable, the heavy duty 4 pole shaded pole motor and a regional version of the player of the heavy rim-weighted turn-dable, the heavy duty 4 pole shaded pole motor and a regional value. Cauching the work of the player of the pla

TRIDGE.

Not 39.95
PK-330WX
RECORD CHANGER WITH FAMOUS GE 4G-052 (1 MIL) DIAMOND MONAURAL RECORD CHANGER WITH GE GC-7 (.7 MIL) DIAMOND STEREO CARTRIDGE.
RECORD CHANGER WITH GE GC-7 (.7 MIL) DIAMOND STEREO CARTRIDGE.
Not 34.95
RECORD CHANGER WITH PICKERING 371C (.7 MIL) DIAMOND STEREO CAR-

PK-359W MAHOGANY BASE
PK-360W BLONDE BASE
PK-361W Wolnut Base

### NATIONALLY ADVERTISED CHANGER



A superb value for the "stereophile"—Top name brond, 4-speed stereo changer with tone-arm which will accept all standard stereo cortridges. Automatic intermix handling of records, muting switch for soundless change cycle, automatic shut-off after lost record. Rim-weighted turntable, heaveduly shaded 4 pole motor for top quality reproduction. If you don't agree that this changer is a top buy—your maney will be refunded. Changer measures 12% x 13% with 5" clearance above and 2-11/16" below materboard. Shap, wt., 21 lbs. less bose RECORD CHANGER (less cartridge) PK-275WX

RECORD CHANGER COMPLETE WITH RONEITE'S FAMOUS COMPATIBLE STEREO TURNOVER CARTRIDGE WITH TWO SAPPHIRE STYLI (.75 & 2.5 MILS)

STEREO TURNOVER CARTRIDGE WITH TWO SAPPHIRE SITU [173 & 2.0 MILS]

MILS]

PK-276WX

2.00 Down

NET 29.95

RECORD CHANGER COMPLETE WITH ELECTRO-VOICE MAGNORAMIC STEREO CARTRIDGE (31MD-7) WITH .7 MIL DIAMOND STYLUS. FOR MAGNETIC INPUT.

PK-337WX

2.00 Down

NET 35.50

RECORD CHANGER COMPLETE WITH ELECTRO-VOICE 3ID-7 CERAMIC OR SIEBEO CARTRIDGE WITH .7 MIL DIAMOND STYLUS. FOR CERAMIC OR CRYSTAL INPUT.

PK-338WX

2.00 Down

NET 33.50

RECORD CHANGER COMPLETE WITH RONNETTE MONAURAL TURNOVER CARTRIDGE WITH 1 MIL AND 3 MIL SAPPHIRE STYLL.

PK-339WX

2.00 Down

NET 27.45

PK-374W MAHOGANY BASE
PK-375W BLONDE BASE
PK-376W WALNUT BASE

## COLLARO CHANGER

WITH "STEREOTWIN" STEREO CARTRIDGE



COLLARO TSC-740
ELAC "STEREOTWIN" MAGNETIC STEREO
CARTRIDGE WITH 0.7 MIL DIAMOND STYLUS

CARTRIDGE WITH 0.7 MIL DIAMOND STYLUS 44.50


MERE IS A MOST UNUSUAL BUY! You get the latest model 4-speed Callaro deluxe record changer, Madel TSC-740, with outstanding styling, dynamically-balanced and damped 2-piece tane arm, automatic intermixing of 7", 10" and 12" records stacked in order of decreasing size, automatic shut-off after last record, automatic shut-off after last record, automatic with the changer you also get the fomous ELAC VARI-ABLE RELUCTANCE "STEREOTWIN" CARTRIDGE, with superior low-hum performance, response of 30-18,500 cps = 2 db, high output of 25 millivalts for excellent signol-to-noise ratio, high compliance of 4x10-\* cm/dyne, and 0.7 mil diamond stylus. THIS IS A QUALITY COMBINATION—AT A PRICE THAT CAN'T BE BEAT! Shpg. wi., 20 lbs.

 20 lbs.
 PK-279 WX Collaro TSC-740 with Elac
 Magnetic Stereo Cartridge
 5.00 Down
 SALE! Net 53.95

 PK-374W. Mahagany finish
 Net 3.95

 PK-375W. Bland finish
 Net 3.95

 PK-376W. Walnut finish
 Net 4.50



Kit contains leads, shell, hardware, and instructions to convert older monaural models to sterea.

GR-163 Same as above, but far RC-121/11. Net 4.85

# SENSATIONAL VALUES in Stereo Turntables and Changers

### LAFAYETTE Professional Turntable With Authentic Hysteresis Synchronous Motor PERFECT FOR NEW STEREO & MONAURAL RECORDS

PROFESSIONAL 4-SPEED TURNTABLE WITH HYSTERESIS-SYNCHRONOUS MOTOR

The LAFAYETTE TRUE HYSTERESIS-SYNCHRONOUS MOJOR. Since many so-called "hysteresis" motors have appeared and will continue to appear on the market, it is important that you know the difference between the real thing, as provided by Lafayette, and the imitators with partial hysteresis mators.

THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR IS PERFECT FOR THE NEW STEREO AND MONAURAL RECORDS. THE FACT THAT THE NEW STEREO RECORDS CONTAIN VERTICAL MODULATION IMPOSES STRINGENT REQUIREMENTS ON TURNTABLES. THEY HAVE TO BE FREE FROM RUMBLE, FLUTTER, WOW AND SPEED VARIATION. THE LAFAYETTE TRUE HYSTERESIS SYNCHRONOUS MOTOR MEETS ALL THESE REQUIREMENTS WITH EFFORTLESS EASE, RESULTING IN SUPERIOR REPRODUCTION OF STEREO DISCS, AS WELL AS TREMENDOUS REDUCTION IN RECORD WEAR.

ONLY LAFAYETTE'S MYSTERESIS-SYNCHRONOUS MOTOR, in its price class, is made to extremely fine tole onces (on the order of .00001 inches)! Only Lafayette's motor has 16 cares, a high permeability rotor magnet, be thrust bearings, ailite sleeve bearings plus felt ôil reservoir, cooling fins as an integral part of the rotor and hollow rator care for maximum efficiency and minimum heat. Only Lafayette's motor can be ailed from above without disassembly, through a unique oil feed system. Only Lafayette's motor has a self-oilgaing armature.

ONLY LAFAYETTE CAN GIVE YOU A REALLY PROFESSIONAL TURNTABLE WITH TRUE HYSTERESIS—
SYNCHRONOUS MOTOR AT SUCH AMAZINGLY LOW PRICES!

#### LAFAYETTE MONEY-SAVER COMBINATIONS

(Bose not included—see index far selection of woodbases)  COMBINATION WITH 16" ARM. COMBINATION WITH 12" ARM									
COMB. NO.	TURN-	TONE	CARTRIDGE	SPECIAL	COMB.				SPECIAL NET
PK-424WX PK-427WX PK-428WX	PK-245	PK-280	E-V 31MD5	87.95	PK-425WX PK-429WX PK-431WX	PK-245	PK-270	GE VR 225 P ckering 371 A E-V 31 MD5	85.95 85.95 85.95

Average Shipping Weight of these combinations is 18 lbs. 5.00 Down



SEE TABLE AT LEFT



### LAFAYETTE 4-SPEED PROFESSIONAL TRANSCRIPTION PLAYER WITH 3 LB. 12" ALUMINUM TURNTABLE

O IDEALLY SUITED FOR STEREO! O BETTER THAN-SD DB RUMBLE & NOISE O VIBRATIONLESS

MOTOR SUSPENSION 

BELOW 0.2% WOW & FLUTTER

MAGNETIC EDDY-CURRENT BRAKE

STEED CONTROL FOR ± 7% VARIA-TION OF EACH SPEED

An anazing low price for the superior quality embodied in this fine instrument, reatures include heavy, rim-weighted, 3 lb. machined-aluminum 12" turntable, magnetic brake with speed control for  $\pm$  7% variation of each speed; the extremely low noise and rumble figure of -50 db below average recorded level; wow and flutter (speed variations) of less than 0.2%; new-type oversize precision-ground later with special lubrication features; positive-locking detents on 4-speed single-knob speed selector; ("off" positions between all speed positions; free-floating shock-mounted motor; automatic idler disengagement in "off" positions; precision spindle turns on single ball bearing; heavy duty 4-pole induction motor. Heavy rubber turntable mat. For 105-120 volts, 60 spc AC; draws 0.13 amperes. Size of motor plate 11" x 10" x 14½"; requires 4"below motor board, 1½" above. Complete with straboscope disc, 45 rpm odopter, AC line cord. Shpg. wt., 14 lbs.

LAFAYETTE SUPER-VALUE COMBINATIONS

Sove an these combinations of Lofayette turntables, arms and nationally famous stereo diamond cartridges. For selection of wood bases see index.

COMB, NO.	TURNTABLE	TONE	CARTRIDGE	SPECIAL NET
PK-411W	PK-240	PK-270	GE VR-225	61.50
PK-412W	PK-240	PK-270	Pickering 371A	61.50
PK-413W	PK-240	PK-270	E-V 31MD5	61.50
PK-415W	PK-240	PK-280	GE VR-225	63.50
PK-416W	PK-240	PK-280	Pickering 371A	63.50
PK-417W	PK-240	PK-280	E-V 31MD5 ·	63.50

Average shipping weight of these combinations is 16 lbs. 5.00 Down

# 17.50 7-000

SEE TABLE AT RIGHT

#### THE REVOLUTIONARY NEW LAFAYETTE VERTICAL-LATERAL KNIFE-EDGE 12" & 16" STEREO TONE ARMS!

- 4 HARDENED-STEEL KNIFE-EDGE PIVOTS & BEARINGS FOR COMPLETE, PRACTICALLY FRICTIONLESS, FREEDOM OF MOTION

- LIGHTWEIGHT, DIE-CAST ALUMINUM TONE ARM
   EQUIPPED WITH UNIVERSAL PLUG-IN SHELL FOR ALL POPULAR STEREO CARTRIDGES
- SELF-CONTAINED BUBBLE LEVEL FOR PERFECT, GUESS-FREE LEVELLING
- PRECISELY-ADJUSTABLE COUNTERBALANCE WEIGHT NON-RESONANT WITHIN THE AUDIBLE FREQUENCY RANGE
- PERFECT TRACKING WITH THE LIGHTEST STYLUS FORCE

#### RUGGED CONSTRUCTION - FOOLPROOF - TROUBLE FREE

LAFAYETTE COMPLETE STEREO TRANSCRIPTION PLAYER

• 5-CONTACT PLUG IN HEAD FOR ALL STEREO CARTRIDGES

• 4-SPEED, HEAVY DUTY 4-POLE TRANSCRIPTION TYPE INDUCTION MOTOR • MAGNETIC BRAKE FOR 

— 7% SPEED ADJUSTMENT • STYLUS WEIGHT ADJUSTMENT SCREW ON TONE ARM • RUMBLE AND 

NOISE -40 DB • LESS THAN 0.3% WOW 
Here is a complete hi-fi, compatible stereo pickup system, designed against obsolescence and yet priced madestly. 
This top quality manual player features a 5-contact plug in head to accommodate the latest stereo as well as monaural cortridges. The lightweight tone arm is an integral port of the mounting plate and requires no installation. 
Equally important in contributing to the excellent performance of this system is the new 4-speed turntable assembly. 

It is equipped with a quiet, heavy duty 4-pole motor, with an exclusive magnetic brake for instantaneous fine 
adjustment of each speed. Strobascope disc also included. Smooth operation is assured further by the 10" heavy 
turntable, fitted with rubber mat. Provision for easy adjustment of stylus pressure is available. Dimensions of 
maunting plate 12-15/16" left to right, and 10%" front to rear. Requires 2%" below and 3" above motor board. 
For 105:120V, 60 cps. Accessories included ares 45 rpm adaptor, output cable to amplifier and plug in heads. Shpg. 
wt., 14 lbs.

PK-162W-Wood|basefar above, custom finished in either mahagany or blonde (Please Specify). Net 26.95
PK-162W-Wood|basefar above, custom finished in either mahagany or blonde (Please Specify). Net 3.95
Net .95
Net .95

PK-163W Unfinished mounting board for above. Strong durable %" gumwood. (Shpg. wt., 1 lb.) ......



DELUXE WOODBASES AND MOUNTING BOARDS FOR TRANSCRIPTION TURNTABLES



TINEST SELECTED HARDWOOD VENEERS
CHOICE OF FIVE CABINETMAKER FINISHES
FREE-FLOATING FOAM RUBBER MOUNTED
MOTOR BOARD
INDIVIDUAL ADJUSTABLE FEET FOR ACCURATE
LEVELING

These substantial waadboses are deluxe units made from the finest selected hardwood veneers by skilled craftisms. All four sides are ½" thick and the tap is ½". All have firmly secured mitered corners. The four bumper feet are individually adjustable for accurate leveling. The free flooting mounting board is foom rubber mounted and the top has a finish matching the woodbase. Available in five hot phose affection of the free flooting mounting board is foom rubber mounted and the top has a finish matching the woodbase. Available in five hot phose affective affective cabinetmaker finishes: mahagany, blande, ebany, wount and fruitwood; please specify when ardering. The elegant styling and finish add beouty to any high fidelity installation. Accommodates a turn-able and a 12" or 16" tone arm. Size, 21½" x 16½" x 4½". Shpg. wt., 15 lbs. Bose and board cut for Lafayette PK-245 turntable.

Net 14.95
Base and board cut far Lafayette PK-240 turntable.

Base and board cut far Lafoyette PK-240 turntable.

Net 14.95

PK-266W

Bose and board uncut for mounting other makes of turntables.

PK-267W .....Net 14.95 PK-335W

Precut, unfinished, smoothly sanded mounting boards for Lofayette turntables. Ready for easy finishing. Size 15%" x 20%" x %". Shpg. wt., 3 lbs. PK-268W. Cut for Laf. PK-245 turntable .......Net 3.75 PK-269W. Cut for Laf. PK-240 turntable ......Net 3.75

#### **NEW! Lafayette VISCOUS-DAMPED** STEREO TONE ARM — PROFESSIONAL 12" PK-90S



JEWEL BEARING SUPPORT
INSTANT PLUG-IN CARTRIDGE CHANGE
AUTOMATIC FLUID CONTROL
PERFECT RECORD TRACKING
ACCOMMODATES MOST STEREO & MONAURAL
HIGH FIDELITY CARTRIDGES

This Stereo/Monaural transcription orm assures dependable and stable operation, utilizing the floating-action principle of viscous-domping. The orm is supported at a single point by a pivot and iewel bearing having negligible friction. Damping is accomplished by a silicone fluid occupying the gop between a ball and socket. This damping cantrol permits high compliance and negligible tracking error and prevents damage to either record or stylus should error and prevents damage to either record or stylus should error and prevents damage to either record or stylus should error and prevents damage to either record us the wise minimized. The tone arm occepts all records up to 12" and accommodates virtually all Sterea or Monoural hi-fi cartridges by means of precisely engineered adapters which simplify installation and provide proper stylus pressure. The arm has a decorative glassy-black finish. Overall length is 12", height adjustable from "" to 2%" above motarboard; raund mounting base is 2%" in diameter. Shpg. wt., 2% lbs.

Shpg. wt., 21/3 lbs.
Shpg. wt., 21/3 lbs.
PK-905-12" VISCOUS-DAMPED STEREO TONE ARM
Net 12.50

#### LAFAYETTE 4-SPEED DELUXE TRANSCRIPTION TURNTABLE



SPECIALLY PRICED!



MAGNETIC EDDY-CURRENT BRAKE
FINE CONTROL OF SPEEDS ± 7%
21%, LB. RIM-WEIGHTED TURNTABLE
HEAVY-DUTY CUSTOM 4-POLE MOTOR
IDEAL FOR STEREO — RUMBLE
NOISE BETTER THAN -400B
WOW & FLUTTER LESS THAN 0.25%.

The ideal unit for medium cast high-fidelity. Incorporates all the important features of the best professional turntables. Heavy 2½ lbs. 10" turntable, lathe-turned far perfect balance rides on thrust bearing • Single knob speed control for 78, 45, 33½, 8 16½ RPM, with stops between settings • Rim drive; idler driven directly by motor shoft capston • Magnetic brake for ± 7% variation of each speed; allows exact speed adjustment as well as variation of musical pitch by a half-ione or more as desired • Idler outomatically disengages in off pasitions • Supplied with strobiscopic disc, rubber turntable mat and 45 rpm odapter • Size: 11½ "W x 10½" D, ½" above motor-baard and 3½" below • For 105-130 Volts, 60 cps. AC. Shpg. wt., 10 lbs.

board and 3% below For Shpg, wt., 10 lbs.

LAFAYETTE PK-180 W Turntable... 2.00 Down Net 23.95

LAFAYETTE PK-180 W Unfinished mounting board, cut for MODEL PK-192 W Unfinished mounting board, cut for MODEL PK-191W-Wood Bose, cut for the Model PK-180 MODEL PK-191W-Wood Bose, cut for the Model PK-180 Turntable and 12" tone arm. Specify mahogany or blande, Net 3.95

THE STATE OF THE PERSON PROPERTY.

## DIAMOND STYLI AT LOWEST PRICES ANYWHERE

MADE FOR LAFAYETTE BY THE FOREMOST AMERICAN MANUFACTURERS

#### KEY TO POINT CODES HOW TO ORDER

explained in the table below.

LP = SINGLE 1 MIL MICROGROOVE FOR 331/3 AND

AG - SINGLE 2 MIL ALL GROOVE FOR ALL SPEEDS ST = SINGLE 3 MIL STANDARD FOR 78 RPM


COMB - DUAL I MIL DIAMONO AND 3 MIL SAPPHIRE Identify your needle by cartridge number and illustration and order by stock no. Note that all all needles listed here are for monaural cartridges.

#### ALL DIAMOND STYLI ARE NOT ALIKE

The symbols in the column headed "PT SIZE" are Only Lafayette's Superior Diamond Styli are MADE FROM WHOLE DIAMONDS PRECISION
GROUND AND POLISHED VERTICALLY AND
EDGEWISE GRAIN ORIENTED

• SHADOWGRAPHED Each Lafayette's diamond stylus is mode from individ-ual diamond, properly ori-ented and ground to close tolarance; shadowgraph tested to give you less wear per play and long service life.

FULL I YEAR GUARANTEE ANY DIAMOND or DIAMOND-SAPPHIRE NEEDLE IN THIS LISTING



	DIAMOND NEEDICE	
STOCK SIZE   REPLACES   REPLACES   JENSEN NO.	STOCK SIZE DIAMOND NEEDLES REPLACES DENSEN NO. PT. FIG. CARTRIDGE DENSEN NO.	STOCK SIZE   REPLACES   REPLACES   JENSEN NO.
I FOR ADMIRAL CARTRIDGES	FOR MAGNAVOX CARTRIDGES	FOR RONETTE CARTRIDGES
PS-10 LP 1 409A11, 409A300, 98A54-1 JPS-30LPD PS-16 COMB 6 409821 JPS-355D	PS-35 LP   S4   S60176, S60180   CRA-55LPD- PS-70   COMB  51   S40181   S-665D	P5.35° LP 53 (T0.200, T0.222, T0.284, or T0.400 series, RA284, DT60 CRA-55LPD
PS-17 LP 7 409A30 ABILPD	75.70 [Comp] 51] 500101	PS-69 LP 38 TX88, A CRA-SELPD
FOR ASTATIC CARTRIDGES	FOR PHILCO CARTRIDGES	*The open end type (Fig. S4) replaces both Fig. S3 and 54
1 1 AC Series ADT ATT AD.1.41.11	PS-56 COMB 43 45-9612, 76-4649, 425-0016 PH-135D	FOR SHURE CARTRIDGES
P3-29 LP 3 1 42-1, 90T series, 10L-3, 11L-3	PS-56 COMB 43 45-0009, 425-0011, 425-0014 PH-13 SD	PS-16 COMB 6 ( WC10, WC10D, PC2 series, PC3 JPS-355D
PS-23 LP 12 408 M-70LPD M-70LPD A-715D A-715D	TOO DESCRIPTION CARRY CARRY INC.	P3-10 COMB   Series, PC4 series, PC5 series   P-72, P-73, P-73R, P-75, P-76,
PS-23 LP 12 410 M-70LPD	FOR PERPETUUM EBNER CARTRIDGES  PS.64 COMB 47   P12/RG   RXSSOSD	PS-10 LP 1 {P-77, P-80, W-21, W-21AR, JPS-30LPD
PS-17 LP 7 QT-33, 44-T, 46-1, 48-1, A-81LPD	PS-65 COMB 48 PE-8, PE10 RX5515D	W-22A, WC-24, WC-25 Series
f 166T Series	PS-66 LP   22   P7000 (MJ, MD) (LP enly)   RXSS2LPD	FOR SONOTONE CARTRIDGES        (1P-LB-1D, 2TD, 2TS, 2T-SD,
118, 120, 124 series, 310T, 312T, 420, 422, 424T5 series, coa scien		BS 70 COMB S1 72T-LB-D, 2T-LB-S, 2T-LB-SO, S.AASD
P3-35 LP 34 310-1, 310-T8, TS, 312-TB, CRR-33-CFD	FOR R.C.A, CARTRIDGES	9980-S, 9980-SD, 9980D, ST, ST-LB-S, ST-LB-S0
	PS-23 LP 121 74047 M-70LPD	PS-32 COMB 51 3T, 3TS, 3TD 5-615D
FOR MAGNAYOX CARTRIDGES	PS.10 LP 1 SS652,76257,(988370-1),75044 JPS-30LPD PS-20 LP 3 76257,(988370-2) A-75LPD	FOR WEBSTER ELECTRIC CARTRIDGES
PS-51 COMB 37 360133, 560151, 560169-1, M-505D	PS-70 COMB S1 78748, 79807, 100453 S-665D	PS-17   LP   7   8X   A-81LPD
7 360170 S60170	PS-25 COMB 14 100329 A-715D	PS-10 LP 1 F11 1PS-30LPD

	REPLACEMENT STY	LI FOR GE CARTRIDGES
FOR GE VR II CARTI		
of a sale server for the first sould for the	7 VP 14 41 AC ACA AC ACA	CONTRACTOR OF CARTO

46-053, 46-040, 46-041, 46-063, 46-061 cartridges. Avg. shpg. wt., 2 oz. PS-48-1 mil diamond LP clip-im stylus. Replaces GE 46-01D PS-546-1 mil sapphire LP clip-in stylus. Replaces GE 46-01S PS-548-3 mil sapphire 78 clip-in stylus. Replaces GE 46-035 MODERNIZATION ASSEMBLIES (FIG. 33)

Modernize your old triple-play cartridge. These assemblies replace both the old and new series "A." Once installed, you can replace one point at a time. DIAMOND SAPPHIRE. Replaces old RPJ-013 and new RPJ-013A.Avg. wt., 2 oz PS-46-list 31,00 Net 2. DUAL DIAMOND. Replaces old GE RPJ-012 and new RPJ-012A. PS-79-list 49.95

Net 7.95 DUAL SAPPHIRE. Replaces old GE RPJ-010 and new RPJ-010A. PS-545-list 5.95

				ES (FIG. 3:		
		• •		ridges. Avg. w		
S-Diamond	i mil (LP) ri	eplaces GE	RPJ-004		. Net 2	.59
i41—Sapphire 540—Sapphire	1 mil (LP) 3 mil (78)	replaces GE replaces GE	RPJ-005 RPJ-001		Net	.99 .99

Individual styli replacements that clip in to all GE "A" series, Avg. wt. 2 PS-47-Diamond 1 mil (LP) replaces GE RPJ-01D P5-543-Sapphire 1 mil (LP) replaces GE RPJ-01S P5-542-Sapphire 3 mil (78) replaces GE RPJ-03S

DIAMOND STYLI FOR



AS LOW AS



MINIATURE HI-FI AUDIO MIXER

#### LAFAYETTE HIGH FIDELITY STEREO-MONAURAL TEST RECORD

- TESTS RUMBLE EACH CHANNEL TESTS LEVEL EACH CHANNEL
- TESTS BALANCE TESTS EQUALIZATION STYLUS WEAR TEST
- TESTS RESONANCE INCORPORATES PHASE CHECK

PS.

A Lafayette exclusive to help you check both stereo and monaural systems. For stereo testing this two-sided 12"

L.P. stereo record has an its stereo side two 1000 cycle bands to check the level of each channel using special metronome recording; rumble test. There are stylus wear test grooves an both outer and inner edges of each side to check both stereo and monoural styli. Incorporates phase adjusting check to simplify phasing of speakers. For monoural testing it provides an RIAA equalization test

With this handy, small mixer you can announce titles before playing records, thix two high impedance micro-

With this handy, small mixer you can announce tilles before playing records, silk two high impedance microphone inputs or perform any other mixing operation where 2 high impedance input channels are converted to a single mixed high impedance input channel. Each input channel has its awn easy acting level control for quiet mixing; all maunted in shielded, chrome plated housing. Has 2 RCA type female input jacks and one male RCA plug on output side. Overall size 2½" x 1½" x ½". Shpg. wt., ½ lb.

AUDIO MIXER—Some quality and characteristics as PK.
239 except autput is standard Phone Plug. Size 3½" x
1½" x 1½" overalt.

AUDIO MIXER—Some quality and characteristics as PK-239 except autput is standard Female Mike Cannector. Inputs consist of 2 Male Mike Cannectars, Size 24" x 14" x "a" overall.

PK-239 AUDIO MIXER



#### LAFAYETTE SPECIAL VALUE STYLUS PRESSURE GAUGE

With the advent of stereo records, correct stylus pressure becomes all important in obtaining the best reproduction and least stylus and record wear. Lafayette's stylus pressure gauge is an accurate device that allows you to read with the pickup in narmal playing position. Range, 0.30 gm. Na spring and minimum moving parts. Shps. wt., 1 lb., 20.

### **NEW! LAFAYETTE PK-244**

. LIFETIME ACCURACY

#### 2-TUBE PHONO AMPLIFIER 4.50 with Tubes



PK-242

PK-243

A two tube phono amplifier using a 50L6 and 35Z5 tube as rectifier. Well-built, good tone and volume. Contents volume control with switch. AT A BIG SAYINGI Shpg. wt.,

..... Net 1.75

3 lbs. PK-24—Two tube

amplifier... COMPLETE WITH TUBES

TR-10 Output transformer tube to 3-4 ohm voice coil. Shpg. wt., 1/2 lb. TR-10 - Singly, ea. 49¢ In lats of 5, ea.45¢

# 2.95

7R-10 Output transformer matches output tube to 3-4 ahm vaice cail. Shpg. wt.,

TR-10 - Singly, eo. 49¢ In lots of 5, ea. 456

PK-23..... 2.95

1.75

### NEEDLE BALANCING GAUGE

PERFECT FOR LIGHTWEIGHT ARMS





LAFAYETTE SPECIAL STYLUS .98 INSPECTION MICROSCOPE

With this pocket-sized inspection microscope you can examine your stylus tip for signs of wear, imperfections, general condition. Its 50X magnification is enough to provide a good, clear image for observation. The "obsource for strong illumination; the slit in the guard also source for strong illumination; the slit in the guard also he used with any stylus. Has adjustable objective lens. Size 3½" long x ½" diam. Shpg. wt., 8 oz.

#### STEREO DIAMOND STYLI AT LAFAYETTE'S LOW PRICES!



FOR RONNETTE

(A). .7 mil diomond for Ronnette turnover cartridges OV, OV1, T1 and single BF40.

PS-81 ......

FOR ELECTRO VOICE

(B). .7 mil diamond for Electro Voice series
26 stereo turnover and series 21 single needle.
PS-80 \$2.95

FOR SONOTONE

(C). Combination .7 mil (sterea) diamond and 3 mil (78 RPM) sapphire for Sonotone 8T.

PS-82

FOR R C A
(E) .7 mil diamand far RCA 106770 ar
106771. \$2.95





Learning longuages is fun by the amazing new Canversa-phone method. In minutes, you'll be understanding and speaking a new language. Expert instructor teaches you perfect pronunciation as you follow each phrase in the lesson manual. Contains 1-10"-33% RPM recard and manual. Shap, wt., ¼ 1b.

ment en	
PR-28 French	Net 2.79
PR-29 Spanish	
PR-30 Italian	
PR-31 German	Net 2.79
PR-32 Hebrew	Net 2.79
PR-33 Russian	Net 2.79
PR-34 Japanese	
PR-35 Portugese	Net 2.79
PR-36 Swedish	Net 2.79
PR-37 Finnish	Not 2.79
PR-38 Norwegian	Net 2.79
PR-39 Mod Greek	

#### MULTILINGUA LANGUAGE COURSE

**GERMAN** 

SPANISH



6.95

You can now learn to speak French, Italian, German or Spanish easily and pleasantly in your own home and progress at your own speed. Features the new simplified porticipation method that helps you to learn the lessons faster and retain them longer. It is a complete language course with 48 lessons on two 12" hi-fi long playing records. You learn with native speakers! The recorded lessons are printed in an Illustrated conversation manual. Also included is a combination of grammar and dictionary book. When ordering, please specify the language desired. Shpg. wt., 4 lbs.

List 9.95 4-LANGUAGE COMBINATION COURSE All 4 languages, French, Italian, German and Spanish, on 8-12" LP records, 192 lessons, 2 books.

#### **NEW! EXCLUSIVE** LAFAYETTE STYLOCHRON



PROTECT YOUR PRECIOUS RECORDINGS.

NO MORE GUESS WORK -KEEPS AN ACCURATE RECORD OF NEEDLE USE.

4.95

More precious recordings are ruined by tardy replacement of the needle than by any other cause. Now, there is no need to let this hoppen, especially to your doubly precious stereo recordings. Lafoyette Sylachron lets you know just how long your needle has been in use so that you can replace the worn needle at the praper time, before it can do damage to your records. The Stylachron is quickly and easily mounted an your motor board or other convenient place. The manment your record changer or turntable starts, the Stylachron begins to register. It staps when the turntable stops. The 1000 hour dial will tell you any time how long you have been using the needle. Dial is marked off in 30 hour units. You can remove your stylus for inspection at any predetermined number of hours. Diameter of the face plate is 2½". Extends 1½" below or behind ponel. Complete with instructions. Shap. wt.,

Page 7

# afayette LEADS IN TAPE RECORDING VALUES!











ALL LAFAYETTE TAPES SOLD ON MONEY-BACK GUARANTEE GUARANTEED FIRST QUALITY SPLICE-FREE

#### You Be The Judge! -**NEW! MYLAR BASE RECORDING TAPE**

Lafayette's huge purchasing power makes it passible to provide you with first-quality tape at about helf the price you would pay for the same tope with the manufacturer's own labels. WE GUARANTEE ASSOLUTE SATISFACTION OR YOUR MONEY BACK. These splice-free mylar base recarding tapes are quality manufactured to assure uniformity of frequency response and complete absence of drop-auts. In addition, they are extremely durable and break-resistant and ate' capable of withstanding temperature and humidity changes. The wide frequency response characteristics cambined with taw naise level and long playing time opens new horizons of recarding possibilities for the high fidelity enthusiasts as well as prafessional sound engineers. Av. Shop. wt., 12 oz.

RT-12 1800 ft. on 1 mit Mylar base. 7" reel diameter. Lots of 5, Ea. 2.25 Singly, Ea.

reels for recarding tape. Avg. Shpg. wt., 4 az. singly.

MS-692. 5" reel. In lats of 6, Ea, .26 Singly, Ea, .29 MS-267. 7" reel. In lats of 6, Ea, .38 Singly, Ea, .45

3.69

#### ACETATE BASE RECORDING TAPE

These popular high quality tapes are coated uniformly with red axide an plastic base with high output and uniform frequency response covering the entire audio spectrum, 40-15,000 cps, completely splice-free. Another Lafayette austranding value for all hi-fir recordists, backed up by our Money Back Guarontee. Using 7½ cps dual track, 1200 ft. reel provides 1 hr. of recording time while 1800 ft. reel pravides 1½ hr. of recording time. Avg. Shpg. wt., 14 oz.

87-10 1200 ft. an 1½ mil acetate base, 7" reel.
Lats af 5, Ea.

1.59

RT-11 1800 ft. on 1 mil acetate base, 7" reel. Lots at 5. Ea. 1.88 Singly, Eq. 1.98

#### **NEW! LAFAYETTE TENSILIZED MYLAR** RECORDING TAPE

Strong and durable because it has been pre-stretched. Shipping weight 1 lb. 

**EMPTY PLASTIC** REELS





METAL STORAGE CANS

Your best protection for valuable recorded tapes and movie film. Cans are ribbed far easy starage. Precision fit makes opening and closing easy. Attractively finished in grey. 3 sizes to choose fram ta fit any size reel. Av. shpg. wt., 8 azs.

ML-154 3" Can. lats of 6, Ea. .18 Singly, Ea. .20 ML-155 5" Can. lats of 6, Ea. .27 Singly, Ea. .30 ML-61 7" Can. lats of 6, Ea. .36 Singly, Ea. .39



#### METAL TAPE STORAGE CHEST

STANDARD CASE: Sturdy all steel carrying case. Halds 12 7" or 5" reels and cans. Twin snap lacks far positive closure; perfect partability. Guards against exposure and accidental erase. Platinum gray hammerlaid finish. Metal separators between reels. Includes index cards, Shpg. wt., 5 lbs.

ML-60 Net 2.99

## afayette BULK TAPE ERASER AND DEMAGNETIZER

#### PROFESSIONAL MODEL

- Completely Erases Tape
- Two Erasing Colls
- Erases up to 1" Tapes
- Erases 1/4" Tapes in One Operation
- For 3", 5", 7"

-No Reversing For 3", 5", 7" or 101/2" Reels -

A carefully designed and precisely manufactured prafessional tape "degausser" for camplete erasing of tapes. Just place the tape reel on spindle of demagnetizer, slowly raidle 2 or 3 turns, take off, and that's all. Reduce tape hiss to the level of new "virgin" tope. Two campletely separate coils are used for doubly-effective erasures, even of large, 10½" reels. Will grase 1" wide tope. An extra powerful unit for heavy-duty use—draws over 9 amperes. Can be used to demagnetize tape, magnetically stripped film, plus tools and wotches. Hos a heavy, custom finished case, a rugged nan-magnetic top, heavy duty an-off switch and power cord. Has built-in fuse. Pilat light prevents accidentally leaving it turned an. Size 6½" x 7½" x 3½". Shpg. wt., 14 lbs. ML-120—Regularly 49.95

#### STANDARD MODEL

- Top Value
- · Reduces Noise Level
- Takes Reels Up To 101/2



A bulk tape demagnetizer that erases existing recarded signals and naise fram magnetic tapes quickly and efficiently. Also capable of demagnetizing metal parts and wark taols, Ideal far the recarding enthusiast destring clean, noise-free tapes. Simply ratate reel of tape several turns over unit, turn over and repeat once. Has twa spindle pasitions: Inner position far tape reel sizes up to 7" in diameter, and the auter one for 10½" reels. Push buttan energizes the cait, and a pilat light installed an tap of the unit indicates unit in operation. Nan-magnetic bakelite plate far tape reel rest. One powerful cail is used far effective erasure of all quarter-inch tapes. Current consumption—5 amps. Heavy duty, rugged gauge metal case. Attractive finish. For 105-125 valts. 60 cycles. Size 7½" x 4¾" x 3½". Shpg. wt., 9 lbs.

ML-176



#### LAFAYETTE TAPE HEAD DEMAGNETIZER . EXTRA CONVENIENT

• REMOVABLE POLEPIECES

Lafayette Tape Head Demagnetizer uses removable pale-pieces. Three camplete sets are furnished: straight, 45°, and 90° (right angle), permitting quick and easy use with any tape head. Far from being a luxury, a tape head de-magnetizer is necessary far best tape recarder perfarm-ance. Although unmagnetized when new, tape heads grad-ually became magnetized by sharp switching pulses accur-ring while switching the recorder fram play ta recard ar vice versa. The solution is to use a demagnetizer to re-

mave this permanent magnetism from the head, thus reducing the naise level. Periodic head demagnetization is required for all tape recorders to insure aptimum signalta-naise ratia. Naw Lafayette enables anyone with even 

### **New!** LAFAYETTE RK-103 DUAL SPEED TAPE RECORDER

### PACE-SETTING QUALITY

AT ONLY

\$5.00

#### CHECK THESE FEATURES!

PUSH-BUTTON CONTROLS / DUAL SPEED-71/2 & 31/4" PER SECOND / TWIN SPEAKERS / TAPE LUDEX COUNTER / SIGNAL TO NOISE RATIO BETTER THAN 40 db / WOW AND FLUTTER LESS THAN 0.35% / DUAL TRACK SPONSE SO-13,000 cps / POWERFUL S WATT AMPLIFIER

One of the finest tape recorder values Lafayette has ever affered. A perfect Christmas gift for the entire family . . . fine for hame, school or office. At hame the RK-103 is ideal far parties ar recording your favarite musical performances. Use it at school far lactures, nates or vaice training. In the affice the RK-103 is excellent far sales presentations or distaining.

tlans or dictation. Handy, fool proof operation has been accamplished by utilizing rugged push-buttan controls for play, record, rewind, farward and stop. Autamatic interlocked switching makes it impossible to accidentally erase, spill or break tape. Dual speeds—7½ and 3½ ips are incorporated along with dual track facilities, thus praviding great versatility with tape ecanomy. Tape-Index counter allaws precise pinpointing of any partion of



tape. Recard level indicator light facilitates recording by showing you when volume control is carrectly set. Fast forward and rewind—1200° in 80 secands. Accepts 7" reel size. Twin matched speakers (ane an each side of recarder) coupled with an excellent 5-watt amplifier pravide amazing tanal quality fram 50 to 13,000 cps dispersing sound over a 360° area. Provisian for connecting to external speaker and external amplifier. Input jack for recarding fram your Radio-Phona ar T.V. Attractively finished in black and white scuff-resistant pyroxylin material. Camplete with microphone, 600 ft. of tape and extra reel. Dimensions are 14" H x 14" W x 10" D. Shpg. wt., 33% lbs.

### At Last!

#### A TAPE RECORDER EVERYONE CAN AFFORD

A Precision Unit Imported to Bring You Super Value and Economy

- WEIGHS ONLY 71/2 LBS.
- . COMPLETE WITH MONITOR JACK AND EAR PHONE
- USES STANDARD 5" REEL
- RECORD LOCK PREVENTS ACCIDENTAL ERASURE

69.95



Perfect for dictation at the affice, lecture notes and speech correction far the student ar far that party at hame. This compact, rugged portable tape-recorder with tope speed of 3½ ips provides up to ane hour of recording time on a standard 600 ft. 5" reel of tape. Special permanent magnet dynamic speaker insures clear reproduction. Camplete with sensitive micraphane plus earphone far manitaring. All the features of the larger units yet weighs only 7½ lbs. and measures only 10-11/16" x 4½" x 5½". Attractively finished in two-tone scuff resistant vinyl type material. Shpg. wt. 10 lbs. 5.00 Down .....

#### TELEPHONE PICKUP COIL



This telephane pick-up coil is designed to feed into the micraphane input of either a tape recorder ar any high gain amplifier. The pick up can be easily attached to the telephane by the use of a rubber suction type attachment. The cail is electrostatically shielded to minimize hum pick-up. When properly positioned an telephane handset, the output of this device is more than adequate for a fully madulated tape recarding. Camplete with 5' shielded cable. Shpp. wt., 6 azs.

MS-693



#### TAPE SPLICER WITH WAIST-TYPE SPLICE

QUANTITY LIMITEDI

Over 70% off!

Here's a terrific valuel The famous RCA Autasplicer cuts a diagonal flap joint in the tape and frim the splicing tape and tape edges with an indented trim cut. The slight "woists" farmed prevent adhesive fram contacting recorder mechanism and prevent layer-to-layer adhesion. No more "wow", "flutter", or erratic performance due to adhesive deposited on tape guides, etc. Consists at a tape alignment guide with self-adhesive back for fastening to any surface, cutting unit with diagonal cutter on one side and waist-type cutters on other, and protective cover for blades. Shpg. wt., 6 az.

SP-144

Net .98

TELEPHONE PICKUP FOR RECORDING

TELEPHONE CONVERSATIONS



MS-16...



DOWN PAYMENTS AS LOW AS 2.00 AND UP TO 24 MONTHS TO PAY - SEE PAGE 44

## AN EXCITING NEW SPEAKER DEVELOPMENT



#### **New! Lafayette** COMPRESSION-HORN TWEETER

RESPONSE 1500-16,000 CPS
 20 WATTS • EXPONENTIAL
HORN • FOR 2-WAY, 3-WAY
OR 4-WAY SPEAKER SYSTEMS
 WIDE-ANGLE DISPERSION OF
HIGHS • FOR TOP OR INCABINET MOUNTING


A high quality compression-driver tweeter with a frequency response of 1500-16,000 cps and a continuous duty rating of 20 watts. Vertical positioning of the mouth of the exponential harn provides widest dispersion of high frequencies of ear-height. With chrome-plated fork-type swivel bose. Flux density is a high 13,500 gauss for greatest efficiency; crassover range is 2800 cps or higher, with 4000-5000 cps recommended for 3-way systems; the wide, smooth response range permits it to be used with 2-, 3-, or 4-way speaker systems. The exponential harn is a heavy, one-piece costing non-resonant within the audible frequency range. Vaice call impedance is 8-16 ohms. Chrome-plated screw terminals for easy connections. Overall height with swivel stand is 44", width 21", behind-panel mounting requires a rectangular cutaut (long axis vertical) 1%" x 4-3/16", Shpg. wt., 3 lbs. 5K-105 Compression-driver Horn Tweeter ......Net 8.95

#### 2 OR 3 WAY **CROSSOVER NETWORK**



- 4 CROSSOVER FREQUENCIES
- . L PAD BALANCE CONTROLS
- . EASY TO USE
- . IMPEDANCE 16-OHMS

### **High Compliance Dual-Voice Coil** Stereo Woofers



## THE VERY SAME STUDIO QUALITY WOOFERS EMPLOYED IN THE LAFAYETTE CELESTIAL-SATELLITE STEREO SPEAKER SYSTEMS

Acoustical studies have shown that low frequency response is not directional... indeed the stereo effect we hear is determined by frequencies above 350 cps. This dual vaice cail wader features two electrically separate vaice cails on a single wader chassis. Each vaice cail receives low frequencies from its respective stereo channel. Both of these signals are blended through the single wader cane. This advance in wader design naw makes possible 3-channel stereo without the need of complicated castly control filters or adapter networks.

Naw Lafayette affers these advanced design dual valce cail waafers for the high-fidelity enthusiast who wishes to build his own 3-channel stereo speaker system—or use it as the basis of a monoural system naw and eventually wark into a 3-channel stereo system.

#### 12" DUAL VOICE COIL WOOFER

- FREQUENCY RESPONSE 20-2500 CPS 2

  LB. ALNICO V MAGNET 2" VOICE COIL

   HIGH COMPLIANCE CONE FLOATS ON

  ROLLED CLOTH EDGES IMPEDANCE—EACH

  VOICE COIL 8-OHMS POWER HANDLING

  CAPACITY 30-WATTS

  SK-133 Shpp. wt., 10½ lbs. .... 2.00 Down.....Net 25.50


#### 8" DUAL VOICE COIL WOOFER

# afayette Presents

### **THE NEW ULTRA-LINEAR SK-128 FULL RANGE 8-INCH DUAXIAL** SPEAKER WITH NEWLY DEVELOPED TWEETER BAFFLE DESIGN.

■ 40 TO 16,000 CPS—FLAT WITHIN 3 DB ■ HIGH EFFICIENCY - HIGH EXCURSION WOOFER WITH UNIQUE "CONICAL STIFFENER" ■ HANDLES HEAVY BASS PASSAGES WITHOUT "DOUBLING"

Eccentric Tweeter Mounting & Unique Elliptical Baffle Completely Eliminates Interaction Between Woofer & Tweeter

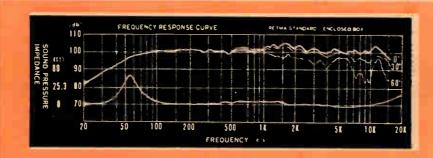

### LAFAYETTE MINI-DUCT BOOKSHELF ENCLOSURE WITH SK-128 8" ULTRA-LINEAR SPEAKER

The perfect answer for those who demand realistic sound reproduction even where space is limit

Two of these systems are ideal for sterea. Shpg. wt., 28 lbs. 2.00 Down	
5Y-343WX Speaker System in Walnut	Net 39.50
SY-344WX Speaker System In Mahogany	Net 39.50
SY-345WX Speaker System In Blande	
SY-346WX Speaker System in Oiled Walnut	Net 39.50
5Y-347WX Speaker system in unfinished birch	Net 37.50





## THE WIDELY ACCLAIMED SK-58 12" COAXIAL SPEAKER **Now Offered Exclusively By Lafayette At** Tremendous Savings

SUPERB PERFORMANCE GUARANTEED -OR YOUR MONEY BACK!

### THE WORLD-RENOWNED Lafayette SK-58

- RESPONSE 30-15,000 CPS
- SHEEPSKIN "FREE EDGE" CONE MOUNTING
- 11/4 LB MAGNET WEIGHT
- . 3" COAXIALLY MOUNTED TWEETER
- . BUILT-IN LC NETWORK
- . RATED AT 20 WATTS CONTINUOUS POWER

COMPARABLE 44.50



Lafayette's exclusive 12" coaxial is a precision-made high fidelity laudspeaker, universally acclaimed by music lavers, hi-fi enthusiasts and professional experts alike as the greatest performance-value an the hi-fi market. It provides a truly faithful reproduction of sound without any "coloration" or distartion, its excellence being responsible for its use in in-numeroble high fidelity music systems today. The SK-58 incorporates such features as heavy, high flux density TSK-5 magnets for high efficiency; ¾" wide sheepskin cane-edge suspension and special composition fibre cane material, specially treated for ultra-linear, distartion-free response; heavy rugged cost metal frame for freedom from resonances and far greater rigidity.

The coaxially-maunted 3" cane-type tweeter has a bell shaped maunting for maximum dispersion of high frequencies with no back radiation. With the built-in 3000 cps cross-over network it contributes its share to the smooth delivery of the averall wide range response of 30-15,000 cps. Waafer resonance in free air is 40 cps. Speaker power handling capacity is 20 watts continuous sine wave, 35 watts peak program material. Impedance of the voice call is 8 ahms, connections being made to chrome-ploted screw terminals. Finished in gray-brawn apolescent enamel, the speaker is supplied complete with "brilliance" level control. Shpg. wt., 11 lbs.

SK-58 12" COAXIAL SPEAKER 2.00 Dawn Net 29.50

# REVOLUTIONARY HIGH-FREQUENCY SPEAKER

### THE NEW LAFAYETTE Sphericon


HIGH FREQUENCY SUPER TWEETER



At long last the breakthrough in High-Frequency Speaker design. Here is a tweeter with unequalled performance, engineered for todays high compliance stereo speaker systems. The Lafayette Sphericon represents a complex systems. The Lafayette Sphericon represents a complex systems. The Lafayette Sphericon represents a complex systems in all directions, vertically as well as the departure from Electrostatic tweeters, which are extremely result less amplification is needed assuring lower distortant dutilize an L-pad on the woofer in order to hear the tweeter properly, thereby lowering the efficiency of the woofer to the same level as that of the Electrostatic minus 1 db from 3000 cyst os supersonic frequencies. At tweeter, In the case of many high compliance low effi-

#### THE MOST SIGNIFICANT ADVANCE IN TWEETER DESIGN OF THE STEREO AGE

- FREQUENCY RESPONSE FROM 3,000 CPS TO BEYOND 40,000 CPS.
- UNIFORM DISPERSION OVER 120° IN ALL DIRECTIONS
- HIGH-SENSITIVITY ALLOWS USE WITH ANY 4-16 OHM SPEAKER
- UNIQUE DOMED PHONELIC DIAPHRAM
- . POWER CAPACITY 30 WATTS
- REQUIRES NO HIGH VOLTAGE OR POWER SUPPLY



### LAFAYETTE Sphericen TWEETER AND ACOUSTIC RESEARCH AR-2 SPEAKER SYSTEM COMBINATIONS AT MONEY SAVING PRICES

SPHERICON EXTENDS THE RESPONSE OF YOUR AR SPEAKER TO BEYOND 40,000 CPS

AR-2 10" Acoustic suspension speaker and tweeter assembly; 42-14,000 cps. ±5 db; Size 13½" x 11" x 24".

Shgs. wt., 52 lbs.

Sy-341 WX—Consists of Lafayette 131 Sahericon Tweeter and AR-2 Korina (Bland) Finish .5.00 Dawn.Net 113.00

Shpg. vt., 52 lbs.

SY-339 WX —Consists of Lafayette SK-131 Spherican
Tweeter and AR-2 Mohagany Finish 5.00 DownNet 98.60
SY-340 WX—Consists of Lafayette SK-131 Spherican
SK-131 Spherican
and AR-2 Korina (Bland) Finish .5.00 DownNet 113.00
SY-342 WX—Consists of unfinished AR-2 speaker system
and Lafayette SK-131 Spherican Tweeter 5.00 DownNet 92.65



#### LAFAYETTE ECONOMY CELESTIAL-SATELLITE STEREO SPEAKER SYSTEM

● FREQUENCY RESPONSE 25-16,000 CPS ● 8" HIGH COMPLIANCE DUAL VOICE COIL WOOFER WITH 2 LB. ALNICO V MAGNET ● 3-CHANNEL WIDE PANORAMIC SOUND FROM A NORMAL STANDARD 2-CHANNEL STEREO AMPLIFIER

CHANNEL STEREO AMPLIFIER

The Lafayette engineering staff was faced with the challenge of developing a high quality, campact, inexpensive, 3-channel stereo speaker system reflecting the same excellence and design principles of the larger Deluxe Lafayette Celestial Satellite Stereo Speaker System. Results far exceeded our fondest expectations. Low frequencies below 350 cps are fed from their respective stereo channels, into two electrically separate voice coils of a new high campliance 8" dual voice coil woofer with 2 lb, magnet, housed in an especially engineered reor vented duct part enclosure. This new woofer produces a rich, full bodied bass response with excellent transient characteristics. Middle and high frequencies are produced by two Satellite 8" speaker systems of a unique dual cone construction. The two cones literally float on flexible corrugated edges, one within the other, resulting in a mechanical crossover—the larger cone produces midfrequencies, but only the small inside cone radiates high frequencies. Satellite enclosures are constructed with a stoping front, making it possible to aim the Satellite toward the listening area.

Satellite toward the listening area.

This economical 3-channel Lafayette Celestial-Sotellite Stereo Speaker system produces a quality of sound for in excess of its small size and reasonable price. A clarity and definition of instruments and voices are achieved that is not possible in conventional 2-channel stereo speakers. Bolance controls provide just the right degree of balance for your listening tastes and room acoustics. The location of these speakers are not critical—Satellites may be separated by the full width or length of the room with the Celestial bass unit at any point between Satellites. Best of all—the small size of this system practically eliminates upsetting changes in room decor. Finished an 4 sides in choice of Mahagany or Walnut for vertical or horizontal placement, Power handling capacity 30 Walts. Impedance 8-ohms. Dimensions 15½" W x 10" H x 10½" D for Celestial woofer, Satellite is 4½" D at tap x 6½" D at battam x 12" L x 9½" H. Shpg. vt., 35 lbs. Supplied complete with necessary instructions and hook up cable. LAFAYETTE ECONOMY CELESTIAL-SATELLITE SPEAKER SYSTEM IN MAHOGANY SK-142WX

5.00 Down

NET 74.50

NET 74.50





SPECIAL

BUY 2 FOR

ONLY

6.95

STEREO 12.95

#### **NEW! 61/2" COAXIAL SPEAKER**

• FOR EXCELLENT HI-FI SOUND • ECONOMICAL & A SPACE-SAVER FOR STEREO
• RESPONSE 50-16,000 CPS! • BUILT-IN CROSSOVER NETWORK • LARGE, HEAVY MAGNETS

An excellent speaker, with all the best features of coaxial design, especially recommended for use in stereo high fidelity systems where space and/or cost are factors. The 6½" woofer is pravided with extra-heavy large magnets for good power sensitivity and low distortion; the 2" tweeter is a separate speaker coaxially mounted in a housing which completely seals off back radiation and with a mesh dispersion screen to pravide smooth, wide-angle-dispersion high frequency response. The built-in electrical crossover

• FOR EXCELLENT HI-FI SOUND • ECONOMICAL & A SPACE-SAVER FOR STEREO

contributes to the overall smooth tonal response of 50-16,000 cps. Woofer response is 70 cps; voice coil impedance is 8 ohms. Color-coded, screw-type terminals. Requires 5½" diameter cutout. Mounts with 4 equally-spaced holes. Size is 6½" diam., 3½" deep. Shpg. wt., 3½ lbs.

SK-97 6½" COAXIAL SPEAKER.

Net 6.95

GET 2 FOR STEREO.


Only 12.95 Net

LAFAYETTE SPACE SAVER SPEAKER ENCLOSURE FITS INTO BOOKSHELF

> 9.95 EACH

PERFECT FOR STERECT Only careful Lafayette planning can result in such a handy enclasure priced so low! A beautifully built cabinet with smooth, shining finish available in mahagany, walnut or striking blonde, this enclosure will match any type of room decor. Ruggedly constructed of ½" wood sides, top and bottom ½" wood front and back. Sturdy enough to withstand even very high volume levels without vibrating. This handsome enclosure has a thousand and one uses. These units make the ideal two or three-channel stereo system or can be used to supplement existing speakers either as the second channel speaker, or as a center stereo speaker for better balance. Ideally suited as the remote speaker in stereo table-model phanographs. Although meant primarily for stereo use, this enclosure can, of course, be used wherever a small hi-fi speaker is desired. Anywhere you use it, you will find its appearance just right. Put it on a bookshelf in the library, on a table or a cabinet in the den or living room, even mount it on the wall. One of the three finishes will match any room. Takes a 6" or 6½" speaker for optimum reproduction of both taws and highs, has a small port for port-loading

DEAL - SPECIAL PRICE



ELECTROSTATIC 3 ELEMENT TWEETER

NOW ONLY



SK-150 Mahagany Finish SK-151 Walnut Finish SK-152 Blande Finish (Please specify finish) Shpg. wt., 7 lb. Net 17.50

#### RECOMMENDED

#### INSTALLATION ACCESSORIES

ssover networks and L pads to match impedance
CROSSOVER NETWORK KITS

Consists of cails and condensers and detailed assembly instructions. Shop, wt., 2 lbs.
KT-128—8 ahm crossover kit (far AR-1, AR-2 & KLK-6)

VC-49-8 ohm (for AR-2 & KLH6) Shpg. wt., 6 oz.

Net 2.75

Net 1.49

VC-50-16 ohm. Shpg. wt., 6 oz.

Net 1.49

#### NEVER BEFORE AT THIS SPECIAL LOW PRICE

LAFAYETTE SK-132 12" COAXIAL SPEAKER



**CHECK** FEATURES! - ZZ

- EXTREMELY FLAT FREQUENCY RESPONSE FROM 35 TO 16,000 CPS.
   WOOFER FREE-AIR CONE RESONANCE OF 40 CPS.
   1½ LB. MAGNET WEIGHT.

ABSOLUTE MINIMUM DISTORTION.
HANDLES 20 WATTS OF CONTINUOUS POWER.
PERFECT FOR STEREO.

Here is one of the greatest speaker values Lafayette has ever affered. Manufactured of the finest materials—clean, crisp response down to the lowest frequencies with the woofer cone utilizing a shallow curved form thereby preventing deterioration of its superior characteristics resulting from sustained usage. The sturdily built voice coil is made with fluoric bonding agents and easily withstands high peaks. By mounting the tweeter slightly off center of the woofer, interference between the two are eliminated. Impedance: 16 ohms. Shpg. wt., 13 lbs.

SK-132 12" COAXIAL SPEAKER ... 2.00 Down ... Net 22.50

#### NEW! LAFAYETTE SK-130 8" EXTENDED RANGE HIGH-FIDELITY SPEAKER



FREQUENCY RESPONSE 40
TO 18,000 CPS.

15 OUNCE HIGH EFFICIENCY
"ALCOMAX" MAGNET
FLUX DENSITY 13,000 GAUSS
1" VOICE COIL

Made with typical British craftsmanship—this is one of the sweetest,
smoothest sounding 8" speakers we
have heard. A 15 ounce Alcomax
ring magnet plus a hyperbolic cane
as extension or midrange speaker—
or utilized to make it ideal far use
as extension or midrange speaker—
or utilizing two—just the thing for
stereo. Capable of handling a full 15 Watls of power and
has a voice cail impedance of 16 ahms, Shpg. wt., 3 lbs.
SK-130 8" EXTENDED RANGE SPEAKER.......Net 11.95



COMPRESSION HORN TWEETER WITH 2 or 3 WAY CROSSOVER



Versatility is the byward in this combination of the famous Lafayette SK-105 tweeter and LN-7 crossover. The Lafayette LN-7 of db per octave crossover may be utilized as a 2-way at 500 cps or 3300 cps now-and in the further of the state of

Page 10

## **NEW! LAFAYETTE**



### SK-127 12" COAXIAL **SPEAKER** WITH DUAL **WIDE-ANGLE TWEETERS**

- FREQUENCY RESPONSE
   40-16,000 CPS
   HIGH QUALITY
   SEAMLESS CONE
   BUILT-IN CROSSOVER
   NETWORK WITH
  BRILLIANCE LEVEL CONTROL
   HEAVY DUTY CONSTRUCTION

HEAVY DUTY CONSTRUCTION

This speaker must be considered as one of the foremost High-Fidelity values today, its tonal quality and features equal that of speakers many times its price. The woofer section is constructed of a one piece seamless cone with a 1½" voice coil set in a rigid non-resonant frame. Employing a unique dual cone wide-angle tweeter assembly (approximately 125° harizantal dispersion angle) which electrically crosses over at 2500 cycles. A brilliance level control is provided making if possible to vary tweeter level according to personal taste. The speaker has an overall frequency response of 40-16,000-cps. Vaice ceil impedance 8 ohms. Shpg. wt., 8 lbs.

SK-127 12" COAXIAL SPEAKER. Net 14.95

#### SPECIAL COMBINATION



Naw you can obtain what is conceded to be the greatest performance value on the hi-fi morket—and save up to 29.50. Available with either SK-111 15" 3-way speaker with 1% lb. magnet or SK-113 3-way with 3½ lb. magnet. These are both highly efficient integrated 3-way speakers made by world renowned Goodmans of England. Supplied complete with genuine 12 db/octave crossover network with L-pad high frequency level control.

The enclosure is the renowned Lafayette bass reflex in either highboy or lowboy stying and in a choice of machagony, walnut or blande. Saidly constructed of ¾" stock, these units have picture frame maldings, attractive plostic grilles, tapered legs, brass ferrules, internal acoustic linings, and are finished in genuine wood veneers. Size of lowbay (less legs) 28%" w x 23\%" h x 16\%" d. Same size for highboy with height and width interchanged.

WHEN ORDERING, SPECIFY CHOICE OF BOTH: STYLE — HIGHBOY OR LOWBOY FINISH—MAHOGANY, BLONDE, WALNUT

SY-281WX SK-111 15" with 11% 1b. magnet 3-WAY SPEAKER & ENCLOSURE COMBINATION.-Net 89.50 Only 5.00 Down SY-338WX SK-113 15" with 31% 1b. magnet 3-WAY SPEAKER & ENCLOSURE COMBINATION.-Net 99.50 Only 5.00 Down

#### THE

### **ELIPTOFLEX**


Brought To You By Lafayette Research-Engineered To Set A New Standard Of Speaker Enclosure Excellence

● NOW IT IS POSSIBLE TO HAVE ALL THE ADVANTAGES OF A HIGH EFFICIENCY SPEAKER IN A BOOKSHELF SIZE ENCLOSURE ● NEWLY DESIGNED ELIPTICAL PORT BROADENS FREQUENCY RESPONSE AND PROVIDES BETTER TRANSIENT RESPONSE ● NEW DIFFRACTING RING ELIMI-NATES CANCELLATION EFFECTS BETWEEN FRONT AND REAR RADIATION

tribute to the excellence of the "Eliptoflex" performance: one, the elliptical port, and two, the diffracting ring. The loudspeaker is mounted on a boffle recessed in the cabinet shell with the front-plate extending partially across the front surface of the baffle forming ducts or tubes from the port openings to the outside oir. The elliptical cutout changes the effective length of the duct across its area. This variation in path lengths provides an extremely smooth transition from duct to free air; broadens the frequency response at which it is effective and provides better transient response. Mixing the front and reor radiation from the loudspeaker diaphragm in this manner produces a truly coaxiol presentation over the complete frequency spectrum. The tonal unity is such that no separation af source can be detected between high, middle and low frequencies. A triangular shaped diffracting ring mounted on the front of the boffle board virtually elinates undesirable cancellation effects normally produced by close coupling of front and rear cone radiation. The result is a "lens" effect, changing relative particle velocities and consequently, phase relationships so as to produce a smooth transition from front to rear radiation.

ranished on 4-sides for either norizontal or	
vertical placement.	
CAB-83WX, "ELIPTOFLEX" (mahognay) Net	36.50
CAB-84WX, "ELIPTOFLEX" (walnut)	36 50
CAB-8SWX. "ELIPTOFLEX" (blond) Net	36 50
CAB-86WX. "ELIPTOFLEX" (ailed walnut) Net	34 50
Set of attractive Wood Runner Feel ottaches on ha	rizontal
ar vertical sides. Adds 1" height, Shpg. wt., 1	lb.
CAB-44W (mahagany)	1.45
CAB-45W (wolnut)	1.45
CAB-46W (blond)	1 1.45







A
164
10
SITY 312



STUCK I	FUCTOZONE	SPEAKER	PRICE PRICE	
SY-302WX SY-303WX SY-304WX SY-305WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	LAFAYETTE- SK-58W	. 62.00 59.00 ea. 115.00 for 2 8hpg. Wt., 35 lbs.	
SY-306WX SY-307WX SY-306WX SY-309WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	LAFAYETTÉ- GOODMANS SK-110WX	80.00 79.50 ea. 153.00 for 2 Shpg. Wt., 44 lbs.	2
SY-310WX SY-311WX SY-312WX SY-313WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	LAFAYETTE- GOODMANS SK-112WX	102.00 97.50 ea. 190.00 for 2 shep. Wh., 39 lbs.	2
SY-314WX SY-315WX SY-316WX SY-317WX	CAB-41WX CAB-42WX CAB-43WX CAB-S2WX	LAFAYETTE- GOODMANS SK-114WX	112.00 109.50 ea. 210.00 for 2 shep, wt., 59 lbs.	2
XW816-Y2	CAB-41WX CAB-42WX	UNIVERSITY 312	104.04 89.50 ea. 173.00 for 2 Shpg. Wt., es lbs.	
		100		-

IN UNITED S	TATES, ENGL	AND AND CANADA	
STOCK #	ENCLOSURE	SPEAKER	REG. SPECIAL PRICE
SY-320WX SY-321WX	CAB-43WX CAB-52WX	UNIVERSITY 312	104.04 89.50 ea. 173.00 for 2 Shpg. Wt., e5 lbs.
SY-322WX SY-323WX SY-324WX SY-325WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	UNIVERSITY UC-122	59.95 ea. 113.00 for 2 Shpg. Wt., 30 lbs.
SY-326WX SY-327WX SY-328WX SY-329WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	JENSEN H223F	105.00 89.95 ea. 175.90 for 2 Shpg. Wt., 27 lbs.
SY-330WX SY-331WX SY-332WX SY-333WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE 12TRXB	97.18 82.50 ea. 159.00 for 2 Shep. Wt., 38 lbs.
SY-334WX SY-33SWX SY-336WX SY-337WX	CAB-41WX CAB-42WX CAB-43WX CAB-52WX	ELECTRO-VOICE SP128	59.95 ea. 113.00 for 2 Shpg. Wt., 36 lbs.



















DOWN PAYMENTS AS LOW AS 2.00 AND UP TO 24 MONTHS TO PAY - SEE PAGE 44


# EW! LAFAYETTE SK-125 HI-COMPLI-ANCE 3-WAY SPEAKER SYSTEM Woofer - 61/2" Mid-Range 21/2" Tweeter



- HIGH COMPLIANCE SPEAKERS
- VARIABLE BALANCING CONTROL
- FREQUENCY
  RESPONSE FROM
  BELOW 35 TO
  18,000 CPS
  SOLID VENTED,
  DUCTED-PORT
  TYPE ENCLOSURE
- PERFECT FOR STEREO

Latayerre has succeeded in achieving a standard of performance formerly associated only with very large speaker systems. This complete 3-way speaker system, incorporates advanced Hi-Compliance speaker design in an extra rigid vented, ducted-part type enclosure, lined throughout with acaustic material. The natural, full bass, faithful mid-range and clear sparkling highs are startling from a speaker system of such small proportians. Employing a 3-way LC crossover network with a variable 10-position balancing control, it is possible to match the speaker system to individual room ocoustics and listening tastes. Frequency response is from below 35 to 18,000 cps. with a power handling capacity of 25 watts, Impedance 8-16 ohms. Finished on all 4 sides in attractive hand-rubbed mohogany or walnut veneers (please specify). Dimensions are 24"W x 11"H x 10%"D. Shpg. wt., 26 lbs.

5K-125WX HI-COMPLIANCE 3-WAY SPEAKER SYSTEM. SET OF 2-SK-125WX SPEAKER SYSTEMS FOR STEREO




2.00 Down Not 98.00

### LAFAYETTE ULTRA-**COMPLIANCE MECHANICAL 2-WAY** SPEAKER SYSTEM

- FREQUENCY RESPONSE 40-16,000 CPS ESPECIALLY DESIGNED VENTED, TUNED, DUCT TYPE ENCLOSURE
- UNIQUE MECHANICAL 2-WAY SPEAKER WITH EXTRA HEAVY MAGNET
- · EXCELLENT FOR STEREO

OUTPERFORMS SPEAKERS DOUBLE LAFAYETTE'S LOW PRICE







### New! LAFAYETTE LA-55 15 WATT MONAURAL AMPLIFIER

- FREQUENCY RESPONSE: 15-30,000 CPS
- POWER OUTPUT 15 WATTS
  SENSITIVITY: 3 MV MAG. PHONO
- HUM 65 DB BELOW RATED OUTPUT
- HARMONIC DISTORTION LESS THAN .3 %



• 5 INPUT CHANNELS

• RUMBLE FILTER

EL84 OUTPUT TUBES IN PUSH-PULL 

BEAUTIFULLY STYLED



### The Most Extraordinary Hi-Ji Value Ever Offered

Outstanding Performance and Engineering + Beautiful Styling + Unbeatable Price—odd up to make the Lofoyette LA-55 truly the finest HI-FI monoural amplifier value today... Beautifully styled in gold and white, the LA-55 easily adopts to any room decor. Perfect for that music system in your living room, finished bosement, store or affice. Ruggedly constructed, this fully integrated amplifier-preamplifier employs premium quality EL84 tubes in push-pull and advanced circuitry for faithful reproduction of all monofanic sources... perfect for use as a second amplifier for stereo or for starting out monofanically and adding stereo at a later date. Engineered to include every practical feature making a worth-while contribution to hi-fi reproduction... SPECIFICATIONS: Power Output 15 worts Institute of High Fidelity Manufacturers Roting (30 watts peck) Frequency Response 15-30,000 cps ± 1 db (at normal listening

**VALUE 69.50** 

2.00 DOWN

LA-55WX 2.00 Down

### LAFAYETTE SUPER-VALUE HIGH-FIDELITY PHONO SYSTEM


PLAY STEREO & MONAURAL RECORDS MONAURALLY, NOW- ADD COMPLETE STEREO LATER This economical high-fidelity system is the performance value of the year. Designed for ruggedness as well as beauty, these components will satisfy even the most critical music listener.



YOU SAVE 29.65

NEW GE MODEL G-7700 56 WATT STEREO **AMPLIFIER** 

#### **NEW GE MODEL 7600** 40 WATT STEREO AMPLIFIER



#### NEW GENERAL ELECTRIC FM-AM TUNER MODEL FA-17



This new GE FM-AM Tuner features high sensitivity, and ability to receive weak signals with minimum distortion. Specifications: AM sensitivity—200 µx per meter far 20 db signal-to-noise ratio; FM-25 microvolts on 300 ahm input for 20 db quieting. FM Distortion—less than 1.5%, harmonic at rated autput—less than 2% IM. Noise—FM 55 db below 100% modulation—AM built-in ferrite rod antenna. AFC eliminates FM drift, Dual-purpose FM-AM tuning meter. Saddle brown finish. Dimensions: 15-1/32" W x 5%" H x 10%"D. Shpg. wt., 15 lbs. For 110-120 Volts, 60 cycles AC.

3-329WX	5.00 dawn ,	Net	127.35
FA-15 Same as FA-17,	but finished in beige		
G-330WX	5.00 dawn	Net	127.35
FA-16 same as FA-17,	but finished in white		
GA.331WX	5.00 dawn	Net	127.35

#### STEREO 235 GIVES NEW DIMENSION TO MUSIC

### UNCOMPROMISING QUALITY!



35 WATT STEREO AMPLIFIER

171/2 WATTS PER CHANNEL

• FREQUENCY RESPONSE: 20-20,000 CPS ±1 DB

HARMONIC DISTORTION LESS THAN 1 % AT RATED OUTPUT

IM DISTORTION LESS THAN 2%

4 EL84 TUBES IN PUSH-PULL

DUAL CONCENTRIC SEPARATE BASS AND TREBLE CONTROLS

CLUTCH-OPERATED VOLUME-BALANCE CONTROLS

HIGH SENSITIVITY FOR USE WITH NEW STEREO CARTRIDGES

 VARIABLE BLEND CONTROL ELIMINATES EXAGGERATED CHANNEL SEPARATION

COMPARABLE

represents a new standard in stereophonic amplifiers. Every outstanding feature you could ask for in an amplifier has been provided—Completely versatile, this instrument may be used as a dual 171/2 watt stereo amplifier or as a single monophonic 35 watt amplifier . . . perfect for those on a limited budget who wish to start out with a monaural system and eventually build into stereo.

Engineered to deliver the finest performance under all conditions; an exclusive blend control has been incorporated, providing continuously variable channel separation from full monophonic to full stereo, thus insuring the correct degree of stereo separation for individual listening tastes and room acoustics. Concentric clutch-operated volume-balance controls provides individual or simultaneous level control for both channels. Bass and treble are adjusted by means of separate dual-concentric controls for independent tonal control of each channel. Function switch provides Aux, Tape (high level) Tuner and Phono. Simple slide switches are provided for Power on-off, Phase Reverse, Channel Reverse.

SPECIFICATIONS: 35 watts—17½ watts per channel ± 1 db.
Institute of High Fidelity Manufacturers Rating (70 watts peak)
Harmonic Distortion: Less than 1% at rated output; IM Distortion:
Less than 2%. Frequency Response: 20 to 20,000 cps ±1 DB (at normal listening level); Tone Control Range: Treble ±10 db at 10 kc; Bass ±10 db at 50 cps. Sensitivity: For full power-High level inputs 0.5v. Mag. phono 4 mv at 1 kc. Hum and Noise: Volume control at max.-High level inputs 65 db below rated output. Mag. phono 55 db below rated output. Channel Separation: Greater than 40 db. Total: 10 inputs 2 Aux, 2 Tape (high level) 2 Tuner, 2 Mag. Phono, 2 Crystal Phono; Total 4 outputs 2 Tope Out, AC convenience outlet located on rear. Dual 8 and 16 ohms speaker outputs. Total of 9 tubes consisting of 4-EL84, 2-7199, 2-12AX7 and 1-GZ34. For 117 volts, 50/60 cps AC. Attractively styled in a rich brown vinyl cage with brass plated escutcheon and ivory and gold knobs. Dimensions:  $14''W \times 4\%''H \times 9''D$ . Cover and legs may be removed for panel mounting. Shpg. wt., 22 lbs. LA-235WX

5.00 Dawn Net 69.50

#### LATEST SHERWOOD-HI-FI COMPONENTS

S-5000 STEREO 40W. AMPLIFIER



This brond new sterea cantrol amplifier features the most versatile cantrals available: Dual loudness, bass and trable cantrals; one knob varies both channels simultaneously—yet, pull aut on the knob, and you can vary each channel independent of the other! Features presence, rumble and scratch filters, DC filoments, indicater lights to indicate made of operation used. For playing manaural records with 'stereo cartridges, ingenious phasing system balances out all vertical (rumble and noise) pickup! SPECIFICA. TIONS: POWER: 20 watts each channel, 40 waits an manaural. RESPONSE: 20-20,000 cps ± ½ do at full power. INPUTS: Phono (RIAA), tape head (NART8), 6 high level. NOISE: —80 db (—60 db for phono). OUT-PUTS: dual 4, 8, 16 ohms, dual cathode fallawers for tape recarder. 12 TUBES: 4-6805/EL84, 2-7199, 5-12AX7/ECC83, GZ34. sel. rect. 14" x 14" x 4". Shpg. wt., 29 lbs. Model 6-265WX less case 5.00 Down Net 189.50

#### S-3000 II BASIC FM TUNER



105.50

#### S-2200 FM-AM STEREO TUNER



179.50

		Shpg. wt.	DAPTER	S FOR	
		de Band	2.00	Dawn	Net 49.50 Net 54.50
G-279W	A4MX 4	1-KC Narro	w Band		5.00 Down
G-280W	A6MX 6	7-KC Narro	w Band		5.00 Down
					5.00 Down

STOCK	CASES	FOR :	SHERWO	OD C	OMPONENTS	
						00 Down
G-280W	A6MX	67-KC	Narrow	Band	N	1 54.50
					5.0	00 Down
G-279W	A4MX	41-KC	Narrow	Band	N	at 54.50
					3.0	JU DU W !!

	-	DED FOR DHERWO	OD COMPONENTS	
5TOCK	MFR.			
NO.	NO.	COLOR	FOR	NET
G-281W	A	Brown Flextone	SMX-S 5% x 10%	4.00
G-282W	В	Block Flextone	x 41/2", 4 lbs,	4.00
G-283W	A	Brown Flextone	1	5.00
G-284W	В	Block Flextone	S-22005, S-5000 S	5.00
G-285W	C	Mohog, Leatherette	(14 x 13 x 41/2;	10.00
G-286W	1	Block Leatherette	( Shpg Wt., 8 lbs1	15.00
G-287W	T	Ton Leatherette		15.00
G-288W	W	White Leatherette	)	15.00
G-289W	A	Brown Flextone	) S-1000115,5-10605	5.00
G-290W	В	Black flextone	S-2000115,5-3000115	5.00
G-291W	c	Mahog. Leatherette		10.00
G-292W	ī	Black Leatherette	( 14 x 10% x 4%:	15.00
G-293W	T	Ton Leatherette	Shog. Wt., 6 lbs	15.00
G-204W	w	White Leathersto		15.00

# Lafayette STEREO TUNER

. . . Simplicity, flexibility and superb styling have been carefully integrated in this quality instrument. Offering tremendous versatility, the LT-77 will receive the new simultaneous FM-AM stereophonic broadcasts or since the FM and AM sections die completely independent, the tuner may also be emplayed for FM or AM reception separately. Designed with the future in mind . . . a multiplex output has been included for the new stereo FM. Each unit has been hand wired and individually laboratory tested.

Contrals provide for every tuner function. On-off power switch; Separate AM/FM flywheel tuning; Individual AM/FM volume controls; Choice of AM, FM, FMAFC or stereo reception. FM circuitry features Armstrong gounded grid low noise frant end and triade mixer coupled with tuned dual limiters, Foster—Seeley discriminator with AFC and AFC defeat. FM Sensitivity of 1.5 uv for 20 db quieting insures long range reception. Superhet AM circuit with 3 stages AVC and ferrite loopstick antenna. Individual 3-gang tuning condenser and tuned Rf stages for both AM & FM sections. Selectivity: FM 200 KC band width; 6 db down, AM 8 KC BW; 6 db down. Frequency Response: FM 20-20,000 cps ± 3 db. AM 20-5,000 cps ± 3 db. Harmonic Distortian under 1% on FM; under 1% on AM far up to 80% modulation. Hum Level—60 db. Image Rejections: FM, better than 40 db AM 70 db. 1.F. Rejections FM 70 db, AM 50 db Radiation meets FCC requirements. Tubes: 2-6AQ8, 4-6BA6, 2-AU6, 1 each 6BE6, 6AL5 and 6X4 plus diade detector. Antenna Input: 300 ahms.

Superbly styled low silhauette enclasure finished in gold and white with eavy to read block dial free Complete with case and least Directions: 14/6/f/W M-15/4 and read block dial free Complete with case and least Directions: 14/6/f/W M-15/4 and read block dial free Complete with case and least Directions: 14/6/f/W M-15/4 and read block dial free Complete with case and least Directions: 14/6/f/W M-15/4 and read block dial free Complete with case and least Directions: 14/6/f/W M-15/4 and read block dial free Comp

#### **MODEL LT 77**

• 14 TUBE PERFORMANCE-10 TUBES (2-DUAL PURPOSE) + RECTIFIER + DIODE & 2-TUNING METERS • ARMSTRONG CIRCUIT WITH DUAL TUNED LIMITERS AND FOSTER—SEELEY DISCRIMINATOR

● FM AFC AND AFC DEFEAT ● EXTREME SENSITIVITY AND WIDE FREQUENCY RESPONSE ● TUNED GRÖUNDED GRID R.F. STAGE ON AM & FM ● MULTIPLEX OUTPUT ● FLY WHEEL TUNING ● AM FEATURES BROADBAND TUNED I.F. STAGE ● 2—3 GANG CONDENSERS INDIVIDUAL VOLUME- BALANCE CONTROLS FOR AM & FM

STRONG SIGNAL Lafayette's separate, precision twin - tuning meters for FM and AM insure pin-point tuning

Delivery Approximately







Pin-point tuning accuracy is provided by this precision tuning meter; evaluates rel-ative strength of the incom-ing signal . . . . invaluing signal . . . . . invaluable when tuning weak sta-

- ARMSTRONG CIRCUIT FOSTER-SEELEY DISCRIMINATOR AND **DUAL TUNED LIMITERS**
- EXTREMELY SENSITIVE-1.5 UV FOR 20DB QUIETING
- 10-TUBE PERFORMANCE—8 TUBES (2-DUAL PURPOSE)
   20-20,000 CYCLES ± ½ DB → AFC
   AFC DEFEAT → SUPERB LOW SILHOUETTE STYLING

## afayette FM TUNER

MODEL LT 80

LT 80 FM STEREO TUNER .... .. 2.00 Down NET 49.50

### afayette COMPLETE STEREO PHONO SYSTEM



Bring the full beauty, and realism of stereo sound into your home with these matched Lafayette components—Carefully selected and matched by experts, rigidly engineered and manufactured to the most exacting speci-. . each component has been completely evaluated by camparative laboratory and listening tests in order to pravide the utmost in flexibility, quality and value.

- Heart of the system is the new LA-235 35 watt stereo amplifier which acts as a camplete stereo cantrol center. Designed with the future in mind all necessary inputs are provided if you wish to add stereo tape and/ar stereo FM/AM later
- The famous Garrard RC 121 4-speed automatic record changer is
- supplied with an attractive wood base in your choice of finisher.

  The new GE VR-227 sterea cartridge insures perfect reproduction throughout the full audia range fram 20-17,000 cps.
- Two of Lafayette's new SK-128 Ultra-Linear Sk-128 full range 8-inch duaxial speakers featuring the most advanced speaker design available, complete this excellent system.



#### COMPONENTS

● LAFAYETTE LA-235 35 WATT STEREO AMPLIFIER ● GARRARD RC 121 4-SPEED RECORD CHANGER 41.65 NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE ... 24.45

WOOD BASE FOR RC121 (SPECIFY FINISH) • 2-LAFAYETTE SK-128 FULL RANGE 8" DUAXIAL SPEAKERS 39.00

Regular Catalog Price

ALL MATCHED COMPONENTS

5.00 Down

Complete Stereo phono system as listed above. Shpg. wt., 46 lbs

HF-725WX ...5.00 Down ... Net 139.95

Same as HF-725 WX, with the addition of 2-Lafayette amazing "Mini-Bookshelf Enclasures (Specify Enclasure Finish' Shpg.) wt. 92 lbs. HF-726WX .. 5.00 Down ... Net 182.45

Same as HF-725WX, but with 2-Lafayette Famous SK-58 Free Edge 12" 2-way speakers. Shpg. wt., 58 lbs.

HF-727 WX 5.00 Dawn Net 158.50
Same as HF-727WX, with the addition of 2-Eliptoflex Bookshelf Enclosures 5.00 Dawn (Specify Enclosure Finish) Shpg. wt., 106 lbs. HF-728WX 10.00 Dawn Net 212.95



# GO STEREO NOW! Super-Fidelity Easy Build Kits

### FIGO HI-FIKITS

**NEW! EICO STEREOPHONIC** 



DUAL PREAMP

G-492 2.00 Down HF85 Same, factory wired & tested ... Not 64.95 G-493 .. 5.00 Down

Model HF-81K STEREOPHONIC



A handsome complete hi-fi stereophonic control center with 2 matched Williamson type push-pull ELB4 pawer amplifiers, all an one chassis. Each channel has 8 inputs; law level-mag phona, tape head, and microphone. Front panel switch for choice of proper NARTB tape equalization for either 7½ or 15 or 3½ laps; high level — 2 auxiliaries, AM, FM and FM multiplex. Frant panel cantrol to abtain stereophonically FM and AM or FM and FM Multiplex; Ganged level cantrols and a separate focus (balance) controls; Independent, low distartion variable cross-over feedback type of bass and treble cantrols far each channel. Adaptable la any panel thickness for console Installation. Output Power rated 28 watts (cantinuous) for manaural, 14 watts for sterea. Freq. Response — ± 5 db, 10 to 100 kc at 2 wout. IM Distortion (60 and 6000 cps at 41) — 0.5% at 10 watts out. Harmanic Distortion — less than 1% from 40.10 kc at 20 w output. Sensitivity for rated output—mag phone: 4 my, tape head; 2 my, mich 6 my; tuner and auxiliaries; 0.5 v. Hum and Noise Level (below 14W):—56 db an low level input, — 75 db on high level inputs. Boss — ± 15 db at 50 cps. Treble — ± 15 db at 10 kc. Secker Connections — 4, 8, & 16 ohms. Tubes — 4 ECC83/12AX7, 2 ECC82/12AU7, 4 EL84, 2 EZ81. Size 15 x 10½ x 4½". Shapa, wt., 24 lbs. Model HF-81K. Kit complete with caver. G-490WX 5.00 Down —Net 109.95

del HF-81 As above but wired. ..Net 109.95



Newly-designed, extremely sensitive, low-noise "front end" supplied in a cast housing completely pre-wired, pre-aligned, ready to use. This new front end, for the first time makes it completely practical even for a novice to build an FM tuner equal to really good professional factory-wired units. Employs the broad-band detector circuitry used in \$159 FM tuners now on the market. Temperature-compensated components and advanced circuitry used in \$159 FM tuners now on the market. Temperature-compensated components and advanced circuitry completely eliminate need for AFC. Drift is less than 2 parts in 10,000 from cold start. Sensitivity is 6 times greater than other kit tuners and equals that of the most expensive wired tuners; It is 1.5 uv for 20 db quieting Radiation suppressed far below FCC standards. Also features new DM-70 travelling tuning eye. Input 300 ohms, IF bandwidth 260 kc, detector separation of 600 okc. Freq. resp. 20-20,000 cps=1 db. Audie output 1 v for 10 uv input with 75 kc deviation. Num 60 db below 1 v. Cathode follower and multiplex outputs. Flywheel slider rule tuning, AGC, stabilized low limiting threshold for excellent performance from weaker signals, broad-band ratio detector for improved capture ratio and easier tuning, full-wave rectifier and heavy filtering, very low distortion. Uses 1-ECC85/6AQ8, 3-6AU6, 1-6AL5, 1-6C4, 1-DM70, 1-6X4, Flexible "low silhouette" design adaptable to any panel thickness for console installation: optional cabinet. MWO: 34% x 12" x 814". Operates from 110-125 VAC. 60 cps line. Shpp. wt., 10 bb.
HFT 90K FM TUNER KIT (less cover) G-422 200 Down Net 39.95
E-3 Cover for obove, G-431 Net 3.95

12-WATT WILLIAMSON-TYPE HI-FI AMPLIFIER . . . PREAMP ... CONTROL SECTION



Compact, attractively styled amplifier with complete front end facilities and true high fidelity performance. Direct tape head and magnetic phano inputs with NARTB (tape) and RIAA (phono) feedback equalizations. Dual triade circuit for yariable turnaver bass and treble feedback-type cantrals. Power autput: 12 watts continuous, 25 watts peak. Intermodulation distortion 1.5% at 12 watts, 0.55% at 6 watts, 60 to 6000 cps. Frequency response: 12-50,000 cps ± 0.5 db et 1 west; 25-20,000 cps ± 0.5 db et 1 west; 25-20

HF12K—Complete Kit. 2.00 Down Net 34.95
HF12 — As above, factory wired.
G-425 — 5.00 Down Net 57.95

tayette STEREO TUNER KIT

THIS STEREO-TUNER IS YEARS AHEAD



**KT-500** IN KIT FORM

> LT-50 124.50 COMPLETELY WIRED AND TESTED

THE LAFAYETTE STEREO-TUNER IS UNIQUE AND INCOMPARABLE

Unique And Incomparable

More than a year of research, planning and engineering went into the making of the Lafayette Stereophanic Tuner. Designed against obsolescence, it incorporates every proctical and worthwhile feature that is considered necessary for your complete satisfaction of all present and future types of broadcasting. Already, breethtaking stereophanic programs are being transmitted via FM and AM. It will certainly become more and more the popular method of high fidelity broadcasting. The tuner also provides an autual for multiplex FM stereophanic reception, enabling you to enjoy the ultimate in high-fidelity sound reproduction. Since the FM and AM sections are completely independent of each other, this tuner can be used furthermore as a dual-manural tuner. In this way, the music lovers are able to listen to concert programs on the FM channel in one room, while the younger-set can listen to a different program and AM in another room. In addition, an a monoural program which is broadcasted simultaneously videnable and the same through individual amplifier-speaker systems. The improvement of quality will be immediately noticeable because the sound source is now distributed and at the same time, the hole-in-the wall point source effect is completely eliminated. Of caurse, the unit can also be used as an ordinary type of FM-AM tuner, providing you with unsurposed quality of reception.

Apart from its unique flexibility, this is, before all else, a superior high-fidelity tuner, employing many features found only in the highest priced units. An inspection of the tubes and parts used will reveal that this tuner is engineered without compromise of any kind. With the Lafayette Stereo-Tuner you are assured of noise-free, drift-free, distartion-free performance. You will not only hear this quality, but also sense it even in the mechanical details, in the "feel" on the velvet-smooth easy flywheel tuning, in the professional appearance of the tostefully selected colors that will blend with any decor. The just-r

Use it as a Stereophor FM-AM Tune

THE MOST FLEXIBLE TUNER EVER DESIGNED! Use it as a Stereophonic FM-AM Tuner Use it as separate Monaural FM & AM Tuners Use it as straight Monaural FM or AM Tuner

● MULTIPLEX OUTPUT FOR NEW STEREO FM ● TWO PRINTED CIRCUIT BOARDS AND IF'S PREALIGNED ● FM AFC AND AFC DEFEAT ®17 TUBE PERFORMANCE — 11 Tubes (4 dual-purpose) + Tuning Eye & Selenium Rectifier ● ARMSTRONG CIRCUIT WITN DUAL LIMITERS AND FOSTER-SEELEY DISCRIMINATOR ● 12 TUNED CIRCUITS AND DUAL CATHODE FOLLOWER OUTPUTS ● EXTREME SENSITIVITY AND WIDE FREQUENCY RESPONSE

ONLY

\$5.00 DOWN

> Use it as Monavral FM & AM Tuners Use it as separate Monaural FM or AM Tuner

SPECIFICATIONS RANGE: FM 88-108MC, AM 530-1650KC. FM CIRCUIT: Armstrong, low noise front end with triode grounded grid amplifier and triode mixer. Double tuned dual limiters, Foster-Seeley discriminator, AFC and AFC defeat. AM CIRCUIT: Superhet with 3 stages AVC, 10kc whistle filter, ferrite ontenno. DISTORTION: Under 1% harmonic on FM; under 1% on AM for up to 80% modulation. HUM LEVEL: 60 db below 100% modulation. SENSITIVITY: FM—full limiting on signals os low as 1 µv, 2 µv for 30 db quieting; AM Terminal Sensitivity 5 µv. SELECTIVITY: FM 200kc bondwidth; 6 db down, AM 8kc 8W; 6 db down. FREQUENCY RESPONSE: FM 20-20,000 cps ± ½ db, AM 20-5,000 ± 3 db. FM DRIFT: ± 5 kc Moximum. IMAGE REJECTION: FM 40 db; AM 30 db. I.F. REJECTION: FM 70 db, AM 50 db. RADIATION: MEETS FCC REQUIREMENTS, OUTPUT LEVEL: FM 2½v for 100% modulotion, 1v for 30%; AM average 1v. CONTROLS: 5 controls; FM VOL, AM VOL, FM Tuning, AM Tuning, and five position function selector switch. TUBES: 3-68A6, 2-6AU6, 1 each 68K7B, ECC85, 6AL5, 63E6, 12AU7 and 6015 tuning eve. Selenium rectifier. OUTPUT IMPEDANCE: Low impedances cathode follower. Output jacks for FM, AM or Sterea. ANTENNA INPUT: 300 ohms. Size, 13½v W x 10½v D x 4½v M. Shage, wt., 18 lbs. Kit comes complete with all parts and metal cover, a step-by-step instruction manual, schematic and pictorial diagrams. Net 74.50 LT-50WX Some as above, completely foctory wired and tested 5.00 Down Net 124.50 LT-50WX Some as above, completely factory wired and tested 5.00 Down Net 124.50

#### LAFAYETTE OFFERS THESE FAMOUS KITS.



#### LAFAYETTE MASTER AUDIO CONTROL CENTER with BINAURAL CHANNEL AND DUAL VOLUME CONTROL

• Self-Powered • DC On All Filements • 24 Positions of Equalitation
• Tape Head Imput, High Impedance • Dual Cathode Follower Output Stages

This is not only the finest hi-fi preamp characterized by unmatched features, but it has been functionally designed to keep pace with the conversion of your present hi-fi system to binaviral (Stereophanic) sound. Incorporates an extra channel and dual valueme control for binaviral reproduction. Features include DC on all tube filoments, negative feedback in every stage, dual cathode follower output stages and latest printed circuit construction. Less than 0.09%. IM distortion and less than 0.07 harmonic distortion at 1V, Hum and noise level better than 80 db below 3V. Uniformly flot frequency response over entire audible septrum. 7 inputs for every type of phono, tuner or taue. Tasteful styling, brilliantly executed. Size 12½ × 9½ x 3½.7. Shgp. wt., 10½ bs.

KT-300—Lafavette Master Audia Control. Kit Compilete with consented detailed execution.

KT-300—Lafayette Master Audio Control Kit Complete with case and detailed assembly in structions. 2.00 Down Net 29.50

LT-30—Same as above completely wired and tested with case and instruction manual.

2.00 Down Net 49.50

DELUXE 70 WATT BASIC AMPLIFIER

• Conservatively Reted At 70 Wetts • Inverse Foodback • Variable Damping
• Metered Balance And Bies Adjust Controls • Available in Kit and Wired Form
Here's ultra-stability in a 70 watt basic power amplifier employing highest quality components
conservatively rated to insure performance and long life. Features matched pair KT 86's and
wire range linear Chicago autuat transformer, variable damping control, meter for bias and
balance and gald finish chassis. Frequency response 10-100,000 cps ± 1db. Hum and noise
90 db below full autput, IM distortion less than 1½% at 70 watts, less than 0.3% below 30
watts. Harmanic distartion less than 2½ at 70 watts from 20 to 20,000 cps ± 1 db. Output
impedance 4, 8 and 16 ahms. Handsome decaretive cage perforated for proper ventilation.
Size 14½ x 10·x 7½" including cage and knobs. Shpg. wt., 40 lbs.

KT-400WX —Lafayette 70 watt Deluxe Basic Amplifier Kit complete with cage and
detailed assembly instructions. 5.00 Down Net 49.50

LA-70WX —Same as above completely wired and tested with cage and instruction manual.

5.00 Down Net 45.50

# H Lafayette & FICO I-FI KI


### yette PROFESSIONAL STEREO MASTER AUDIO CONTROL CENTER With All The Versatility Of A **Broadcast Studio Control** Console

■ A GIANT FORWARD STEP IN PREAMPLIFIER DESIGN! ■ UNIQUE STERED & MONAURAL CONTROL CENTER FACILITIES & OUTSTANDING PERFORMANCE SUPERIORITY! ■ WITH AMAZING NEW BRIDGE CIRCUITRY & CONTROL FOR VARIABLE 3d-CHANNEL OUTPUT FOR 3-SPEAKER STERED SYSTEMS! ■ VARIABLE CROSS-CHANNEL SIGNAL FEED FOR ELIMINATION OF "HOLE-IN-THE-MIDDLE" EFFECTS WITH STANDARD 2-SPEAKER STERED! ■ HIGHLY PRECISE "NULL" BALANCING & CALIBRATING SYSTEM PROVIDES MORE ACCURATE STERED BALANCE THAN METERS! KT-600 LA-600 COMPLETELY WIRED 134.50 uturama **IN KITFORM** OF DESIGN FEATURES

PRECISION "NULL" STEREO CALIBRATION & BALANCING • CONTROLLED CROSS-CHANNEL SIGNAL MIXING

THIRD CHANNEL CONTROLLED OUTPUT CONTROLLED MONAURAL MIXING OF ALL INPUTS 24 SEPARATE EQUALIZATIONS ON EACH CHANNEL . MONAURAL RECORDING OR PLAY WITH STEREO SOURCES

● 6 CONCENTRIC FRONT-PANEL CONTROLS ● 4 CONCENTRIC REAR-PANEL INPUT LEVEL CONTROLS ● SWITCHED FLETCHER-MUNSON LOUDNESS CONTOUR COMPENSATION PARALLELED OR SINGLE CHANNEL AMPLIFIER DRIVE WITH MONAURAL SOURCES 180° PHASE REVERSAL CHANNEL REVERSAL WITH OR WITHOUT PHASE



#### PERFORMANCE SPECIFICATIONS

PERFORMANCE SPECIFICATIONS

FOR SUPER-STEREO

RESPONSE 10-25,000 (PS - 0.5 08 TAPE
NAD PLAYBRICK EQUALIZATION FOR NEW 4-TRACK
STEREO LOW LEVEL SENSITIVITY 1,78 MILLIVOLTS
FOR 1 VOLT OUT HIGH LEVEL SENSITIVITY 87
MILLIVOLTS FOR T VOLT SWITCHED 12 DR/OCTAVE
RUMBLE 2 SCRATCH FILTERS LESS THAN .01 %
IM DISTORTION D QUAL TAPE MONITOR JACKS 2
SWITCH FOR RECORD 2 PLAYBACK DQUAL IMPUTS
FOR STEREO/MONAURAL CERAMIC, CRYSTAL OR
CAPACITIVE PICKUPS WITH FULL USE OF EQUALIZATION SELECTORS SIGNAL-TO-MOISE BETTER THAN
—80 OB AT HIGH LEVEL 2 —62 DE AT LOW LEVEL
INPUTS FOR I VOLT OUT PRESENCE'S SWITCH FOR
SOLO PROJECTION BASIC CONTROLS ALL CONCENTIPL PLATE FOLLOWER' OUTPUTS FOR LOW IMPEDANCE WITH LOWEST DISTORTION 7-T-YPE 7/023
LOW-MOISE QUAL TRIODES 4-AUXILIARY AC
OUTLETS

#### **SPECIFICATIONS**

CONTROLS: 12 (6 dual concentric, 6 single) on front panel, 4 on rear (dual concentric). INPUT AND TURNOVER SELECTOR: 7-position, dual concentric, Independently set for each channel. Positions: Aux, Tope Amp. Tuner, AES, RIAA, Tape Head-800, IP. ROLL-OFF SELECTOR: 7-position, dual concentric, independently set for each channel. Positions: LP: RIAA, AES, 10.3, 5, flot, Tope Head. BASS CONTROL: Dual concentric, 15 db boost or cut of 30 cps. TREBLE CONTROL: Dual concentric. 15 db boost or cut of 10,000 cps. RUMBLE FILTER: On-off switch, 12 db per octave slope, down 15 db of 30 cps. SCRATCH FILTER: On-off switch, 12 db per octave slope, down 15 db of 30 cps. SCRATCH FILTER: On-off switch, 12 db per octave slope, down 15 db of 30 cps. SCRATCH FILTER: Stereo, A E, Colibrate: Switch selects different functions for both channels. Positions: Monoural A, Monoural B, Stereo, A E, Colibrate: Golibrate, Reverse Phase, Normal, Reverse Channels, Reverse Channels + Reverse Phase, VOLUME-BALANCE CONTROL: Dual concentric. Clutch type: pulling out center knob locks controls apart for independent digutement when performing the "null!" stereo balance and colibrating operation; pressing knob bock in permits simultoneous operation at Moster Volume Control for both channels, with Fletcher-Aunson loudness contour compensation when Loudness switch is on.

BRIDGE CONTROL: Continuously variable, with power on-off switch. Controls variable 3d-channel (Bridge) autput and cross-channel ignol feed. LOUDNESS SWITCH: On-off. Provides loudness contour compensation for Volume Control. PRESENCE SWITCH: On-off. Provides solo projection by supplying o broad rise over opproximately two octaves, centered at 2,300 cps. TAPE MONITOR SWITCH: Ploy-Monitor positions. REAR PANEL CONTROLS: IN-PUT LEVEL SET CONTROLS: ask level at output of preamplifier stoge for Tape Head, Mag. Phono and Ceramic-Crystal-Capacitive Phono controls tipe Amp., Aux; Low Level—Tape Head, Mag. Phono, Ceramic-Crystal-Capacitive Phono. OUTPUTS: 3. Tape (duol), Moin (duol), Bridged Outp

KT-600 WX Some as above, completely factory wired and tested 5,00 Down Net 134,50

#### THE LAFAYETTE KT-600 SOLVES EVERY STEREO/MONAURAL CONTROL PROBLEM

In Laloyette's constant effort to bring you the very lotest and most advonced developments in electronics—and particularly in high fidelity—at prices everyone can afford, Lafayette went to the most forward-looking experienced brains in the electronics/high fidelity industry and has now DARED to produce what we think is the MOST REVOLUTIONARY DEVELOPMENT IN STEREO HIGH FIDELITY—A BRILLIANT NEW ACHIEVEMENT—THE LAFAYETTE KT-000 STEREO MASTER AUDIO CONTROL CENTER!

THE LAFAYETTE KT-600 STEREO MASIER AUDIC CONTROL CENTER!

The KT-600 provides 4 dual concentric input level controls for bolonced use of different types of program sources — such as AM and FM tuners, tape recorder with microphone, phonograph plus microphone, etc., and without overloading inputs; 3 controls ore for high level input, and a separate level control is provided for the autiput of the preamplifier stoge. The KT-600 provides separate turnover and rolloff dual concentric switches for 24 passible positions of accurate equalization on each chonnel; equalization on each chonnel may be set independently of the other. Furthermore, all inputs can be variably mixed, monaurally, at will (mike with phono, tope recorder with phono, etc.). The Bridge Control permits cross-channel feed or optionally acts as a volume control for the 3d channel (Bridge) output to eliminate "ping-pong" or "hole-in-the middle" effects. An audible, sharp, accurate "null" (dip in sound output) is provided by a "Calibrate" position of the Sterea Function Switch working in conjunction with the clutch-type Balonce Controls for precise stateo bolance — highly important for good sterea performance. The 3d channel output can also serve for mixing any stereo program (stereo record, tape, AM/FM stereo) to produce excellent monourally through a separate amplifier and speakes system in onother room. The KT-600 has Electronic Phase Reversal to make up for reversed-phase recordings sometimes found commercially, in which there is a loss of some portions of the frequency spectrum, and to correct speakers connected out of phose. Channel reversal is also present for correct positioning of steree music to the right or to the left — and this may optionally be accompanied by phase reversal for best overall stereo tound. The KT-600 has a Presence Rise Switch which pulls a sola instrument out of the general musical background with minimum disturbance of orchestrol balonce.

AND STILL OTHER PROFESSIONAL FEATURES OF LAFAYETTE'S KT-600 ARE: Tope head equalization for the new 4-track sterea tapes; Master Gain Control for individual or simultaneous adjustment of chonnel levels; inputs for constant velocity (magnetic) and constant amplitude (ceramic, crystal or capacitive) phono cartridges, all equalized by the Rolloff and Turnover selector switches; individual channel concentric bass controls and concentric treble controls which permit pre-setting for good stereo tonal bolonce and maintaining that bolonce at other tone control settings; tone control circuits use 5%-toleronce components and 2½%-toleronce precision potentiometers for occurate centering of their '\fot\*iotronce components and 2½%-toleronce precision potentiometers for occurate centering of their '\fot\*iotronce components and 2½%-toleronce special monitor heads and preemplifiers and also permit a stereo/monaural tape deck with 1 or 2 record/playback preemplifiers to be permanently connected to the KT-600 for recording and playbock; '\fotals follower'' output stages for low impedance (1500 ohm) outputs with extremely low distortion; special low-flux power transformer and DC operation of all filaments for exceptionally low hum and coal operation; low-inoise deposited metal-film resistors and 7 of the new premium low-noise type 7025 tubes are used for extra-good signal-to-noise ratio. The KT-600 has printed circuit board construction for ease of wiring and maximum performance stability.

### STEREO REMOTE CONTROL CENTER KIT KT-315

### ELECTRONIC STEREO ADAPTER KIT

This self-powered electronic adapter offers exciting features unique even in the fast moving stereo field. Inclusion of low-impedance "plate follower" outputs permits remote operation 50 feet or more from the controlled amplifier. Unusual bridge circuit assures precise balancing of the stereo system by means of audible "null." Objectionable "hole-in-the-middle" effect can be eliminated by cross-feeding variable amounts of audio from each channel. Includes controlled third-channel output for driving third amplifier and speaker, if desired. Individual or simultaneous control of each channel. Phase reversal with or without channel reversal. Selective monaural operation. Frequency response 10 to 25,000 cps ± 0.5 db; gain 6 db; cross channel rejection better than 50 db.





#### NEW! LAFAYETTE STEREO/MONAURAL BASIC POWER AMPLIFIER KIT

• 36-WATT STEREO AMPLIFIER 18-WATTS EACH CHANNEL • FOR OPTIONAL USE AS 36-WATT MONAURAL AMPLIFIER • EMPLOYS 4 NEW PREMIUM-TYPE 7189 OUTPUT TUBES • 2 PRINTED CIRCUIT BOARDS FOR NEAT, SIMPLIFIED WIRING • RESPONSE BETTER THAN 35-30,000 CPS ± 1/2 DB AT 18 WATTS • LESS THAN 1% HARMONIC OR INTERMODULATION DISTORTION

#### FIEDS 20 WATT HIGH FIDELITY AMPLIFIER KIT MODEL HF20K

- ±0.5 db 13 to 35,000 cps; ±1.5 db,
- ±0.5 db 13 to 35,000 cps; ±1.5 db,
  7 to 50,000 cps
  COMPARES WITH MOST EXPENSIVE
  AMPLIFIER MADE!
  BEST BUY IN SUPERLATIVE HIGH FIDELITY
  AMPLIFIERS!

2.00 Down

COMPLETE 49.95

High quality equalizer and cantral section plus 20 watt Ultra-Linear Williamson-type power amplifier. Low distortion feed-back equalizations 5 equalizations provided for 1P's and 78's including RIAA. Variable furnover, low distortion feed-back tone controls. "Flat" positions at center settings of control knobs. Laudness cantral and separate level set cantrol bath an frant panel. Provides adjustable level set cantrol bath an frant panel. Provides adjustable is sired. Laudness cantral can be adjusted to give desired listing level without affecting tope output. Permits use of up to 30 ft. of coble.

Six inputs: 4 high level switched inputs—Tuner, TV, Tope, Six inputs: 4 high level switched inputs—Tuner, TV, Tope, and the switched inputs—Tuner, TV, Tope, inputs: 4 high level switched inputs—Tuner, TV, Tope, inputs in the switched inputs in

#### EICO 30-WATT HI-FI INTEGRATED AMPLIFIER KIT with PREAMPLIFIER **EQUALIZER AND CONTROL SECTION**



• EXTREMELY

VERSATILE EQUALIZATION

AND CONTROL • NEWLY DESIGNED

"LOW-SILHOUETTE" CONSTRUCTION

Combines the high stability margin, wide frequency range, negligible distartian and exceptional power supply reliability of the power amplifier section with an extremely versolity of the power amplifier section with an extremely versolity of the power amplifier section with an extremely versolity of the power amplifier section with an extremely versolity of the power amplifier section with an extremely versolity of the power amplifier section with an extremely versolity of the power amplifier section with an extremely versolity of the power and feel and f

G-504 HF30K basic power amplifier kit, less cover.

Shog. wt., 17 lbs. 2.00 Dawn Net 39.95
G-505 HF30 Factory wired 5.00 Dawn Net 62.95
G-506 E-4 Matching cover Net 3.95



NEW! EICO BASIC AMPLIFIER

35-watt "UHra-Linear" power amplifier (70 watts peak) featuring EL34 tapped-screen output stage, low-naise ER86 featuring EL34 tapped-screen output stage, low-naise ER86 voltage amplifier, 65N7GTB, plus GZ34 rectifier. Frequency response 5-100,000 cps ±1.5 % ond harmanic distriction below 1%. 20-20,000 cps ±1 db both at 35 watts. Hum 90 db below rated output. Damping factor watts. Hum 90 db below rated output. Damping factor watts. Hum 90 db commented output. Damping factor watts. Hum 90 db selow rated output. Damping factor watts. Hum 90 db selow rated output. Damping factor watts. Hum 90 db selow rated output. Damping factor watts. Hum 90 db selow rated output. Damping factor watts. Hum 90 db selow rated output. Damping factor watts watts. Hum 90 db selow rated output. Damping factor watts & 117 valls. Selow 10 (20-20,000 cps.), 15 @ 1 kc. Speaker tops 4, 8, 16 ohms. Power cansumption 130 wotts @ 117 valls. 60 cps. Size: 7" high x 14" wide x 8" deep. Shpg. wt. 25 lbs.

6-412WX HF-35K Amp. Kit 2,00 Down .... Net 47.95 G-413WX HF-35 wired 5.00 Dawn .... Net 4.50 Five-tube "Ultro-Linear" hi-fi omplifier rated 22 watts

G-414 E-2 Motchine Enclosure

Net 4.50

Five-tube "Ultro-Linear" hi-fi omplifier rated 22 watts continuous, 44 watts peak, Lew-noise EF86 direct-coupled to 65N7GTB drives push-pull 616GB tapped-screen output stage. Will handle 4, 8, 16 ohm speckers, including electrostatics. Frequency response ± 1.5 db, 5-100,000 cps (22 watts. IM distortion 160 & 7000 cps) 1%, hormonic distortion belaw 1% from 20-20,000 cps ± 1 db, both of distortion belaw 1% from 20-20,000 cps ± 1 db, both of distortion belaw 1% from 20-20,000 cps ± 1 db, both of distortion belaw 1% from 20-20,000 cps ± 1 db, both of distortion belaw 1% from 20-20,000 cps 1%. hormonic 20 watts for 22 watts. Hum 85 db belaw rated autput. Sensitivity 0.6 value for 22 watts output. Damping factor above 12 (20-valt for 22 watts output. Damping factor above 12 (20-valt for 22 watts output. Damping factor above 12 (20-valt for 22 watts output. Damping factor above 12 (20-valt for 22 watts. Hum 85 db belaw rated autput. 24 hum 14 wide x 8" deps. Shops. wt. 25 lbs.

G-416WX HF-22K Amp. Kit 2.00 Down Net 38.95

G-416WX HF-22 Factory wired 5.00 Down Net 4.50

G-414 E-2 Matching Enclasure

Williamson-type 14 watt (28 watts peak) power amplifier

G-414 E-2 Matching Enclasure Net 4.30

Williamson-type 14 watt (28 watts peak) power amplifier of low cost for both sterea and monaural installations. Frequency response ±0.5 db, 10-100,000 cps ⊚ 1 watt. Harmonic distortion less than 1% (50-10,000 cps) and distortion (60 & 7000 cps) 2% — both ⊚ 14 watts. 20 db distortion (60 & 7000 cps) 2% — both ⊚ 14 watts. 20 db distortion (60 & 7000 cps) factor above 8 (20-15,000 inverse feedback. Damping factor above 8 (20-15,000 inverse feedback. Damping factor above 8 (20-15,000 inverse feedback. Speaker tops 4 & 8, 16 ohms. 12-281. Speaker tops 4 & 8, 16 ohms. 12-281 in 12-281. Speaker tops 4 & 8, 16 ohms. 12-281 in 14-281 in

# Build the Best-Lafayette's Hi-Fi Kits

#### "STEREO 250" KIT NEW



#### 50 WATT INTEGRATED STEREO AMPLIFIER

- Two 25 Watt Channels, 50 Watt Monophonic Output
- Response 17 to 21,000 cycles
- Third Channel Output
- New 6CW5/EL86 Output tubes
- Full Range of Controls and Inputs
- New Distinctive Styling



Model KT-250 64.50
IN EASY-TO-BUILD KIT FORM
Only 5.00 Down

new Lafayette KT-250 offers remarkable versatility, high quality of reproduction and new distinctive styling in one convenient low-cost unit — another example of Lafayette's constant effort to provide the audio enthusiast and music lover with audio components that represent the finest quality value in their class.

Designed and engineered for ease of assembly, the KT-250 is a fine stereo preamplifier and 50 watt stereo amplifier combined — with all the controls and features to enable you to enjoy the utmost in listening pleasure in any situation. Whether you use it as a stereo amplifier delivering 25 watts per channel or as a powerful 50 watt monophonic amplifier, you are assured of true high fidelity reproduction — free from hum, noise and distortion. Check the features below — see why the KT-250 is worthy of a place in your stereo music system.

Unique Separation Control—A new stereo control which provides continuously variable channel separation—from full monophonic to full stereo. Lets you select the amount of separation you want.

Clutch-Operated Volume Balance Control—Gives you a choice of independent or simultaneous control of both channels—you can use it as a master volume control without disturbing previously selected settings on each channel.

without disturbing previously selected settings on each channel.

4 Independent Tone Controls—Independent Bass and Treble adjustment for each channel. Concentric mounting for convenience—inner knob controls one channel, outer the other channel.

Mode Switching—Two slide switches provide Normal Stereo—Reverse Channel—Mon A (Channel A reproduced through both channels)—Mon B (Channel B reproduced through both channels). Input Selector—4-position switch lets you select instantly any one of your connected monophonic or stereo sources—special non-shorting arrangement on one position permits recording and playback using a permanently connected tape recorder.

Loudness Switch—Provides the frequency response changes required by the ear at low listening levels and permits the Volume-Balance control to function as a compensated loudness control.

Phase Switch—Reverses the phase of one channel elec-trically—corrects for speakers connected out of phase or for reversed phase recordings sometimes found com-mercially.

3 Pairs of High Level inputs—For connection of Crystal or Ceramic phono, Tuner, and auxiliary equipment.

2 Pairs of Low Level Inputs—For connection of magnetic phono and Tape Head.

phono and lape nead.

Main Speaker Outputs—Dual 4, 8 and 16 ohm terminals may be paralleled for 4 or 8 ohm operation at 50 watts. Tape Output—Provides an output for Tape recording—unaffected by Volume and Tone Controls.

Bridged Output—A monophonic blend of both channels which can be fed to a third single channel power amplifier and speaker for a greater sound spread in stereo. May also be used for listening in another room.

DC applied to all preamplifier and tone control tube heaters for hum-free operation RIAA equalization on phono inputs NARTB tape equalization on tape head inputs Individual bias and balance controls Hum balance Control Excellent DC power supply regulation provided by silicon diodes Total of 9 tubes, plus 3 silicon diodes—uses premium 6CWS/EL86 output tubes.

#### NO TECHNICAL SKILL REQUIRED

Designed for ease of construction, the KT-250 can be assembled in a minimum of time. Assembly manual contains detailed step-by-step instructions . guides you every step of the way. Large full-scale pictorials show you where every wire and component goes - eliminate any chance of error or confusion. You build an amplifier comparable in every way to a factory-wired unit - and save real money too!

You Save!

#### **SPECIFICATIONS**

CONTROLS: Total of 12 individual controls (3 dual concentric and 6 single); SELECTOR SWITCH: 4 position—Phono-Aux-Tuner-Tape Head. SEPARA-TION CONTROL: Continuously variable with power on-off switch. BASS CONTROL: Dual concentric, 14 db boost or cut at 50 cps. TREBLE CONTROL: Dual concentric, 14 db boost or cut at 10 Kc. VOLUME-BALANCE CONTROL: Dual concentric, clutch-Operated for independent or simultaneous level control of both channels. MODE SWITCMES: 2 slide switches, provide Normal Stereo-Reverse Channel—Mon A-Mon B, LOUDNESS SWITCH: On-Off. Provides loudness contour compensation for volume control. PHASE SWITCH: Provides electronic phase reversal.

tronic phase reversal.

POWER OUTPUT: 50 watts-25 watts per channel, Institute of High Fidelity Manufacturers Rating (100 watts peak).

FREQUENCY RESPONSE: 17-21,000 cps ±1 db (at normal listening level). DISTORTION: Harmonic, less than 0.25% at normal listening level; IM, less than 19%. HUM AND NOISE: (At full volume) High Level-74 db below rated output, Low Level-54 db below rated output, Low Level-54 db below rated output, CHANNEL SEPARATION: Better than 50 db. SPEAKER OUTPUT IM-PEDANCE: Dual 4, 8 and 16 ohms. AUXILIARY OUTLET: 1, switched, TUBE COMPLEMENT: 4-6CW5/EL86, 2-7199, 3-12AX7, 3 silicon diodes. Attractive beige vinyl laminated steel cabinet. Handsomely designed brass anodized aluminum front panel. Sienna brown molded legs, matching knobs with polished brass inserts, 14½" w x 12¾" d x 5½" h (with legs and knobs). Shpg. wt., 26 lbs.

#### EICO MODEL AF-4K COMPLETE STEREOPHONIC DUAL AMPLIFIER KIT

AMPLIFIER KIT

The Model AF-4K kit cansists of two highly fed-back, four wolt amplifiers preceded by complete facilities for stereo/manaphanic aperatian. Provides adequate power levels to drive high efficiency speakers to full room valume. Painstaking design insures excellent respanse, adequate stability margin, and a feedback level of 27 db resulting in low harmanic and intermadulation distartian. Cantrals include: Selector (AM, FM, FM Multiplex, Aux., high-level Phono), Made (Amp 1, Amp 2, Narm., Reverse, Man. Phono, Man. Aux.), Independent, cancentric level and tone cantrols, On-Off switch. Frequency response: ± 0.5 db 30-20,000 cps. Harmanic distartion, less than 1% at 4 wotsts. Sensitivity (for 4 W, autput/channel): 26 V. (phono), .113V (ather inputs). Hum: —74 db below full autput. Speaker cannectians: 4, 8, 16, 32 ahms. Tubes: 2-12DW7, 2-EL84, 1-EZ81. Size: 3% x 12 x 8%". Shpg. wt., 13 lbs.



# EICO HIGH FIDELITY AM TUNER KIT HFT94K

G-500	Kit 2.00 Down	Net	39.95
HFT94	Same as above, but factory wired.		
G-501	5.00 Dawn	Net	65.95

EICO MODEL HF30K 30-WATT



An unusually high quality basic power amplifier and an austranding value. Uses 4 af the remarkable E184 output tubes in a push-pull parallel arrangement. Overall design is such that stability is maintained an all speaker taps, with laads ranging from zero to infinity, Specifications: Output-30 watts continuous, 47 wotts peak. Intermodulation Distartion—35% at 10 watts. Harmanic Distartion—Belaw 1% at 30 watts. Frequency Response—15-50.000 cps ± 0.5 db at 30 watts. Damping Factar—Abave 10, 20-20,000 cps. Sensitivity—1.24 valts far 30 watts aut. Hum—80 db below rated autput. Speaker Cannectians—4, 8 and 16 ahms. Tubes—6AU6, ECC90/6C4, 4E184; 2.E281 (Rectifiers). Power Cansumption—125 watts, 117 valts, 60 cps AC. Size—5" h x 12" w x 7" d. Shps. wt., 17 lbs.

G-504 Kit 2.00 Dawn Net 39.95

HF30 Same as above, but factory wired.
G-505

E-4 Caver for HF30. Shpg. wt., 3 lbs.

EICO MODEL 100.

### HI-FI DUAL POWER AMPLIFIER KIT



#### 10 WATT PUSH PULL HI-FI AMPLIFIER KIT



24.50

BUILT-IN PREAMPLIFIER FOR GE RELUCTANCE CARTRIDGE SELECTOR SWITCHES PERMIT CHOICE OF THREE INPUTS 4, 8 ANO 16 OHM OUTPUTS EASY-TO-FOLLOW INSTRUCTIONS

MONAURAL HI-FI PHONO SYSTEM KIT

HAVE FUN — SAVE MONEY, by assembling this tap-value system yourself. Features Lafayette KT-91 10 watt amplifier kit, famous Garrard RC-121 intermix recerd changer, GE triple-play cartridge with diamond-sopphire intermix never changer, GE triple-play cartridge with diamond-sopphire dual stylus and the new Lafayette SK-124 Ultra-Compliance 2 way speaker system in mahagany ar walnut cabinet (specify finish). Tuner can be added system in mahagany ar walnut cabinet (specify finish). Tuner can be added any time for radia reception. Less changer base. Shpg. wt., 38 lbs. 5.00 Down ... HF-703WX Mahagany base far changer. Shpg. wt., 5 lbs. PK-361W Walnut base

UP TO 24 MONTHS TO PAY

### **NEW: EICO** MODEL HF65AK



#### MASTER CONTROL PREAMP

Features a new 3-stage tane cantrol circuit. Frequency Response — ±0.3 db, 5-200,000 cps. Harmonic Distartion—0.1% at 3v rms out. Sensitivity—Phone, LO Mag, 1 mv; Microphone 1 mv; Tope Head 0.5 mv; High Level Inputs, 0.17V. Controls: Selectar-Equalizer (Aux. V Tuner, Mic, Tope) Boss, Treble, Scratch, Rumble. Separate level and laudness control. Hum—07db on hi-level inputs and—60 db on low level input. Derives power from basic power amplifier 12x8½x3½. Shpg. wt., 9 lbs. G-436 Kit 2,00 Down Net 29.95 HF655K Same as above, but factory wired. G-437 2.00 Down Net 44.95 HF655K Same as HF65AK, but with power supply. Shpg. vt. 10 lbs.

Some as HF65K; but foctory wired.
2.00 Down Net **33,95**Net **49,95** Net 49.95

NEW EICO MODEL HF87K 70-WATT STEREO HIGH FIDELITY DUAL POWER



#### **DYNAKIT PAS-2 STEREO** PREAMPLIFIER KIT

- COMPLETELY INDEPENDENT TONE
- ALL CRITICAL PARTS PRE-ASSEMBLED UNIQUE DYNA BLEND CONTROL



#### NEW DYNAKIT STEREO 70 70-WATT STEREO AMPLIFIER KIT

- ABSOLUTE STABILITY OF OPERATION
- DUAL DYNA BIASETS FOR NON-CRITICAL ADJUSTMENT



The stereo 70 hos 2 independent power amplifiers capable of 35 watts for each channel or 70 watts of power for manaphanic use. Frequency response: ± 0.5 db 10-40,000 cps. IM distortion: less than 1% at 35 watts. Sensitivity: 1.3 valts rms input for 35 watts output. Output impedance: 4, 8, 16 ahms. Minimum channel separation: 55 db. Size: 13x9/3x6/3". Shgs. wt., 32 lbs.

G-455WX Kit 5.00 Down. Net 99.95
Dynakit Stereo 70 Stereo Amplifier. Same as above, but completely wired.

G-456WX 5.00 Down. Net 129.95

#### **NEW! DYNAKIT HI-FI** PREAMPLIFIER KIT

- PRINTED-CIRCUIT MODULE
- 5 INPUTS 2 OUTPUTS
  4 A.C. CONVENIENCE OUTLETS
- INTEGRAL D.C. HEATER SUPPLY



# Save Money—Build Your Own Hi-Fi Kits

# afayette "STEREO 236" KIT



#### 36 WATT INTEGRATED STEREO AMPLIFIER

- 18 Watts per Channel
- Response 15 to 30,000 cps
- Unique "Blend" Control for Variable Channel Separation
- Concentric Clutch-Operated Volume Control
- Inputs for Stereo and Monophonic Sources



Model KT-236 IN KIT FORM 52.50 5.00 Down

#### A NEW LOW-COST STEREO AMPLIFIER ANYONE CAN BUILD

With this single unit you can precisely control and reproduce all monophonic and stereo sources. The two 18 watt stereo channels provide plenty of power for home music systems, and you can also use the KT-236 as a single 36 watt amplifier to feed one or two speakers. Fine wide-range stereo reproduction can be yours when you build this easily constructed kit. It has all the necessary inputs — lets you connect your stereo or monophonic sources permanently, with instant selection provided by the turn of a switch. Has built-in dual preamps for low level phono inputs — R1AA equalized for flat response. It includes a unique "Blend" control which provides continuously variable channel separation from full monophonic to full stereo — you select the exact degree of separation you want. Other features are: Concentric clutch-operated Volume control for independent or simultaneous level adjustment of both channels; Dual concentric Bass and Treble controls—give you 4 independent tonal adjustments; 3-position Selector Switch — Aux-Tuner-Phono; Mode (2 Slide Switches) provide Normal Stereo, Reverse channel, Mon A and Mon B; Phase switch — makes up for reversed-phase recordings sometimes found commercially and also corrects for speakers connected out of phase.

#### **SPECIFICATIONS**

POWER OUTPUT: 36 watts—18 watts per channel ± 1 db. Institute of High Fidelity Manufacturers Rating (72 watt peak).
QUENCY RESPONSE: 15-30,000 cps ± 1 db at normal listening levels. SENSITIVITY: For full output; High level inputs 0.5v; Mag. Phono 3 mv. DISTORTION: Harmonic, less than 0.15% at normal listening level; IM, less than 3%. HUM AND NOISE: (At full volume) High level inputs 70 db below rated output; Mag. phono 53 db below rated output; Mag. phono 53 db below rated output; CHANNEL SEPARATION: Better than 50 db. SPEAKER OUTPUT IMPEDANCE: 8 and 16 ohms. INPUTS: (Total 8) Dual Aux, dual Tuner, dual Crystal Phono, dual Mag. Phono. OUTPUTS: (Total 4) Dual main

DYNAKIT MARK IV 40 WATT POWER AMPLIFIER KIT

The Mark IV is a 40 watt basic power amplifier. Power autput: 40 watts continuous, 80 watts pack. Frequency response: ± 0.5 db 10-40,000 cps. IM distortion: less than 1% at 40 watts, less than 0.5% at 1 watt. Hum and noise: better than 90 db below 40 wotts. Output impedance: 4, 8, 16 ohms. Sensitivity: 1.3 volts rms input for 40 watts output. Tubes: 2 El-34, 7199, GZ-34, selenium rectifier. Finish with nickel chossis, and vinyl coated charcool brown cover. Power consumption: 115 watts. Size: 5 x 14 x 6½". Shap, wt., 20 lbs.

G-449WX Kit. 5.00 Down Net 59-95
Mark IV 40 Watt Amplifier. Same os above, but completely wired. Shap, wt., 20 lbs.

G-450WX Net Accessores.

DYNAKIT ACCESSORIES P5-1 Qual Power Supply Kit. Shpg. wt., 4 lbs.

P3-1 Dual Power Supply Kif. Shpg. wt., 4 lbs.
G-460 Kit Net 8.95
G-461 At above, but wired Net 14.95
PM-1 Panel Mounting Kit for Preamp PAM-1.
Shpg. wt., 2 lbs.
G-462 Kit Net 2.95
PM-25 Panel Mounting Kit (2 PAM-1 & 1 DSC-1).
Shpg. wt., 3 lbs.
G-463

speaker output, dual Tape Out jacks. TUBE COMPLEMENT: 4-EL84, 2-7199, 3-12AX7 plus 2 silicon diodes. Attractive beige vinyl laminated steel cabinet. Handsomely designed brass anodized aluminum front panel. Sienna brown molded legs, matching knobs with polished brass inserts. 14% wide x 11½" deep x 5%" high (with legs and knobs). Shpg. wt., 24 lbs.

MODEL KT-236WX — 36 watt Integrated Stereo Amplifier Kit, complete with deluxe cabinet and legs, all necessary parts and detailed assembly manual.......5.00 down

Net 52,50

#### **Deluxe Stereo Controls**

- 3-position Selector switch
- **Dual concentric Bass control**
- **Dual concentric Treble control** Concentric clutch-operated
- Volume control
- Unique "Blend" control
- Phase reverse switch
- Mode switches


#### **Superior Audio Circuitry**

- Accurate RIAA equalization on phono
- inputs
   Dual hum balance controls for

- hum-free operation
  Total of 9 tubes plus 2 silicon diodes
  Excellent BC power supply regulation
  provided by silicon diodes
  Facilities for recording on tape
  14 db boost or cut provided by each
  tone control

#### **Easy to Build**

Anyone can build this low-cost stereo amplifier — no special skill is needed. Assembly manuals contain clearly-worded step-by-step instructions which guide you all the way. Large full-scale pictorials illustrate every stage of assembly — show you exactly where every part goes. Join the thousands who have already discovered this easy low-cost way of owning the finest audio equipment.



### **Acrosound Amplifier & Preamp Kits**



#### S1001 STEREO PREAMP KIT


Printed circuit board and modular design make construction simple and enjoyable. Unique features include Mike Dub Switch, balance control, and panel Light Matrix, SPECIFICATIONS — INPUTS: 2-MAG. Cart; 2-Tape Head, 2-Tuner (FM-AM, FM-FM Multiplex), Tape Input, Micro phone. OUTPUTS: 2-Main, 2-Tape, 3rd Channel, CONTROLS AND SWITCHES: Tope Manitor, Mike Dub, Input Selectar (78, IP, RIAA-1, RIAA-2, Tape Head, FM-AM, FM-FM Multiplex, Aux.), 2-Boiss, 2-Treble, Bolance, Ganged Volume/Loudness, Output Selector (Check A, Check 8, Stereo, Stereo Rev., Man. AB, Man. A, Man. B), 1-Scratch, 1-Rumble, Phosing, Loudness In-Out. 4 A.C. autlets (2-switched). Input Sensitivity: 5 mv. low level, 30 mv. high level, 2 mv. tope head. 4½ h x 12½ w x 6½," d. Supplied with ribbed aluminum cover in black sofin finish, with sand-calared front ponel, Shpg. wt., 10 lbs. G-578WX 5.00 Down Net 69.50

STEREO 20-20 DUAL BASIC AMPLIFIER KIT
A two-channel basic amplifier Kit with common power
supply. 18 waits per channel at 2% Harm., 1.5% IM distortian; 36 waits manaural. Individual level controls,
stereo-monaural switch. Dual speaker outputs: 4, 8, 16,
32 ohms. Response: 10-70,000 cps ± 1 ab. A.C. 7 x
10 x 51/5" h. Shpg. wt., 18 ibs.
G-570WX 5.00 Down Net 69.50
Stereo 20-20, Factory wired
G-571WX 5.00 Down Net 99.50
Stereo 20. Single channel amplifier Kit; specs equal ta
one channel af 20-20. 7 x 7 x 51/2". Shpg. wt., 13 ibs.
G-575 Stereo 20, factory wired 5.00 Down Net 64.50
Stereo 20A. Stereo 20 Kit, requires power supply, fram
Stereo 20 ar ather source. Shpg. wt., 6 lbs. 7" x 51/2" x
51/2"

G-572 2.00 Down Net 29.50 G-573, Stereo 20A, factory wired 2.00 Dawn. Net 39.50 ULTRA-LINEAR II. (not illustrated). 60 watt power amplifier Kit Size 7" x 15" x 8" h. Shpg. wt., 30 lbs. G-576WX 5.00 Down. Net 79.50 G-577WX As above factory wired 5.00 Down. Net 109.50

DOWN PAYMENT **LOW AS 2.00** 

#### HI-FIDELITY WOOFERS



### 15" HI-FI LOW FREQUENCY WOOFER 31.5 OZ. ALNICO MAGNET

• 20 TO 5000 CYCLES-35 WATTS

This efficient 15" low frequency woofer incorporates many exclusive features. For original equipment or replacement, it provides highly efficient extended low-frequency response, Ideal for assembling 2- and 3-way speaker systems. Handles 35 watts of audio power. Frequency response ± 2 db 20 CPS to 1000 CPS, /and ± 5 db from 20 CPS to 5,000 CPS with proper boffling. Vaice cail dia. 2", impedance 8 ahms, 31.5 az. Alnica V magnet. Finished in beautiful brown enamel. Cane is seamless type, permanently bound to vaice coil. Shpg. wt., 13% lbs. Cone Resonance 45 cycles

SK-67W Net 23.95

### 2.00 Down Net FREQUENCY WOOFER

21.5 OZ. ALNICO V MAGNET-25 WATT

21.5 OZ. ALNICO V MAGNET—25 WATT
Provides efficient, extended low-frequency response
of ± 5 db from 35 to 8000 CPS, and features 25
watts of power handling capacity. Perfect far highfidelity installations or far modernization of older
equipment. Ideal for assembling 2- and 3-way
speaker systems at a budget price. Enclosed magnet structure—completely dust-proof. Compliance of
outer cone and inner spider carefully calculated for
best bass response. 21.5 az. Alnica V magnet, 1½"
dio. voice cail, 8 ahm impedance. All exposed surfaces are finished in beautiful brown enamel. Shpg.
wt., 8 lbs. Cone Resonance 50 cycles

SK-68

2" MID-RANGE SPEAKER





Ideal for use with tweeter and crossover networks to make up a 2- or 3-way system. This 8" mid-range speaker is capable of producing undistorted response down to 350 cps, the crossover frequency. Back is enclosed. Power handling capacity: 25 worts. Frequency response 350-13,500 cycles. Recommended to crossover at 5000 cycles to a tweeter. Cone resonance 150 cycles. Impedance: 8 ohms. Shap. wf., 4 lbs.



#### GE 12" PM HI-FI SPEAKER

- HANDLES 25 WATTS
- 14.5 OZ. ALNICO V
- MAGNET . FREQUENCY RESPONSE 50-15,000 CPS
- ALUMINUM VOICE COIL

This GE deluxe speaker was designed by audio engineers to meet the high standards of performance so essential to high-fidelity and for dependability and durability. The 14.5 oz. Alnica 5 magnet produces a dense magnetic field with resultant aprimum sensitivity and damping factor. Exceptionally wide frequency range — 50 to 15,000 cycles which may be extended to 30 cycles in properly designed enclosures. Free air resonance 65 CPS. The voice coil has a 1 ½" diameter and 8 ahms impedance. SK. 60 Shaa. wt.. 7 lbs.

#### IMPORTED FROM DENMARK



#### **ROYAL DANISH** 12" DUAL CONE SPEAKER

No. 7.95

- . HIGH FIDELITY MODEL
- RANGE: 45-14,000 cps.
- . HIGH FLUX DENSITY

Lafayette brings you this fine imported high fidelity speaker at a fraction of the price you would expect to pay far so much quality. Two canes are maunted an a single axis, and pravide remarkable wide range frequency response from 45 to 14,000 cps. Repraduction af program material is exceptionally lifelike throughout the entire range. An exclusive, special formula cane rim treatment eliminates cone rim resonance and distortion. Also, the damping effect improves transient response and prevents "hangover". Overall depth, 5-3/16". Completely enclased, 1" diameter voice cail with an impedance of 6 ohms. Shop. wt., 6 lbs.

SK-86. 12" Dual Cone Hi-Fi Speaker ....... Net 7.95

## fayette's AMAZING NEW MINI-DUCT



A universal ducted-port bookshelf enclosure engineered for use with 1, 2 or 3-way speaker systems.

- SOLIDLY CONSTRUCTED OF 3/4" WOODS
  START WITH A SINGLE SPEAKER AND BUILD INTO A 2- OR 3-WAY SYSTEM LATER
  ACOUSTICALLY LINED THROUGHOUT
- · AVAILABLE IN A VARIETY OF FINISHES

Now limited space need not necessarily mean limited sound. The Lafayette Mini-Duct is acoustically designed to achieve smooth, distortion-free reproduction with a remarkably full, cleon extended boss response that gives no indication as to its small size. Reducing boards are supplied so that the Mini-Duct will accept an 8" Woofer, 6" Mid-Range and a variety of tweeters. This versatility makes it possible to start with an 8" speaker and eventually build into a 2-way or 3-way speaker system. Solidly constructed of 4" woods the Mini-Duct is beautifully finished in a variety of fine veneers. Designed for attractive placement anywhere in your hame with dimensions 23" W x 11%" H x 11%" D. Shpg. wt., 23% lbs.

CAB-47WX MINI-DUCT	IN WALNUT 2.00 Down	NET 22.50
CAB-48WX MINI-DUCT	IN MAHOGANY 2.00 Down	NET 22.50
CAB-49WX MINI-DUCT	IN BLONDE 2.00 Dawn	NET 22.50
CAB-50WX MINI-DUCT	IN OILED WALNUT 2.00 Do	wnNET 22.50
CAB-SIWX MINI-DUCT	UNFINISHED BIRCH 2.00 Do	wnNET 19.50
Mini-Duct Enclosure fi ment. Choice of mahagan	nished on 4 sides for attractive harize y ar walnut.	intal or vertical place-
CAB-105WX .Nahogany	2.00 Down	NET 24.95
CAB-106WX Walnut	2.00 Down	NET 24.95

SPEAKER AND ENCLOSURE COMBINATIONS

A PERFECT COMBINATION: The "Mini-Duct" enclosure and the famous Lafoyette SK-98 8" mechanical 2-way speaker with patented dual cone construction. This speaker cambined with the Lafayette "Mini-Duct" enclosure will give the same widerange frequency response (40-16,000 cps) normally found only in true coaxial speakers or multiple speaker systems. Shpg. wt., 29½ lbs.

COMBINATION UNFINISHED "MII	NI-DUCT" ENCLOSURE WITH S	K-98 SPEAKER
SY-348WX	2.00 Down	NET 26.50
COMBINATION MAHOGANY "MIN		
SY-349WX	2.00 Down	NET 29.50
COMBINATION WALNUT "MINI-D	OUCT" ENCLOSURE WITH SK-98	SPEAKER
SY-3SOWX	2.00 Down	NET 29.50
COMBINATION OILED WALNUT "		
SY-351WX		
COMBINATION SLONDE "MINI-DL	JCT" ENCLOSURE WITH SK-98	SPEAKER
SY-352WX	2.00 Down	NET 29.50
SK-98 SPEAKER AN	D MINI-DUCT FINISHED ON 4	SIDES
SY-377WX MAHOGANY	OO Down	NET 21 OF

SY-378WX WALNUT ..... 2.00 Down ..... NET 31.95 NET 31.95

THE SPACE PROBLEM LAFAYETTE

### TRIOSONIC

#### **BOOKSHELF SPEAKER SYSTEM**

- FOR BOTH STEREO & MONAURAL
- FREQUENCY RESPONSE 35 TO 18,000 CPS
- UNIQUE 8" WOOFER-MIDRANGE ASSEMBLY
- COMPRESSION HORN TWEETER
- 6 DB PER OCTAVE ELECTRONIC CROSSOVER WITH LEVEL CONTROL
- SOLID 34" VENTED DUCT PORT BOOKSHELF ENCLOSURE

"Triasanic" The perfect blending of attractive bookshelf cabinetry and advanced audio design (years ahead of other engineering efforts along these lines). The exceptional smoothness and cleanliness of the bass and midrange is the product of a unique 8" woofer-midrange speaker design employed in a solid 3" acoustically lined through a common voice coil, with the outer edge of the midrange cone attached and floating on the flexible corrugated edges of the waofer cone. This results in a mechanical crossaver with an absalute minimum of distortion, so that both cones operate in phase at low frequencies. The heavy magnets provide high efficiency and excellent transient characteristics. Smooth extended high excellent produced by use of a composition of a compositi

**42**<sup>50</sup>

BOOKSHELF SPEAKER SYSTEM MA HOGANY FINISH
SY-354WX 2.00 Down Net 42.50
BOOKSHELF SPEAKER SYSTEM WALNUT FINISH
SY-355WX 2.00 Down Net 42.50
BOOKSHELF SPEAKER SYSTEM OILED WALNUT FINISH
SY-356WX 2.00 Down Net 42.50

A LAFAYETTE SPECIAL

#### SPECIAL LAFAYETTE HI-FI AND PA ACCESSORIES SPEAKER PHASING CONTROL

MULTI-INPUT SELECTOR CONTROL 

FLEXIBLE -W-AUDIO Y -(8) SELD. **CONNECTORS** (A) (C) (A)

Far converting Stereo Player to Manaural. Can be used for a Tap-In-Meter Monitor connection. Also required on same Tape Recarders. Shpg. wt., 4 oz.

cable.
MS-672
(B) Phono Jack cannected to 2 Phono Plugs.
MS-673
(C) 3 Phono Plugs connected together by 4" shielded cable.
Net - 59 Net . 59 MS-598



(D)

Campletely shielded Y-Adapters with chaice of connectors and terminations.

(A) Two phono jacks cannectors in parallel ta a standard 2-canductor phane plug. Avg. shpg. wt., 7 az.

MS-595 Net .69
(B) Two phana jacks connectors in parallel to a standard phono plug. MS-596
(C) 3 phana jacks connectors in parallel. M5-597
(D) Two mole microphone connectors in parallel to a standard two-conductor phono plug.

....Net .69

STEREO ARM WITH **RONETTE STEREO** TURNOVER CARTRIDGE ORIGINALLY 8.95 Now 6.95**DUAL SAPPHIRE** CARTRIDGE PLAYS STEREO, MONAURAL LP, 78's

Here is a combination of a famous make crystal stereo cartridge and stereo wired arm all ready for use—at an amazingly low price for a new stereo item. Completely compatible, this unit will play either stereo or monaural recards (78's, too). Output is .4 volt per channel, response 30-14,000 cps. Min. Stylus pressure 6-8 grams. Styli are dual sapphire type, .7 mil and 2.5 mil, individually replaceable. placeable.
PK-290 Stereo Tone arm with Turnover Stereo Cartridge
Net 6.95



Picture Frame Moulding Built-In re-Cut for Most weeters Or No weeter, if Desired If Desired Pre-Cut for 15" Wgofer With Adapter for 12

### **BASS REFLEX ENCLOSURE KITS**

MS-584 Walnut MS-585 Mahagany MS-697 Harvest Wheat MS-586 Fruitwood MS-587 Cherry MS-589 Ebany Net each

#### Factory-Assembled Bass Reflex Enclosures

Same as the Lafayette kits above but factory-assembled and finished in lustrous, hand-rubbed mahogany or blonde to measure up to the finest standards of high quality fine-furniture finishes. Also available assembled but unfinished. Shpg. wt., 54 lbs.

N.	CAB-13WX Assembled Unfinished Highboy 2.00 Down Net 39.	50
	CAB-19WX Assembled Unfinished Highboy 2.00 Down Net 39. CAB-19WX Highboy, Assembled, finished in Mohagany or Blande (piece	ase
-	spectry)	JU
	CAB-21WX Highbay Assembled in Walnut 5.00 Down Net 52.	50
	CAB-14WX Assembled, Unfinished Lawbay 2.00 Down Net 39.	50
	CAB-20WX Mahagany or Blande Lowboy, completely assembled (plea	ase
	specify finish) 2.00 Down Net 49.	50
	CAB-22WX Lowboy Assembled in Walnut 5.00 Dawn Net 52.	50

LAFAYETTE-GOODMANS High Fidelity Speakers



\*\*SK.102\*\*

\*\*HANDLES 30 WARTS \*\* FAMOUS ENGLISH GOOD.

\*\*MANS-MADE 12" WOOFER BY\*\* MIDRANGE, COMPRES.
\*\*SION-DRIVER HORN TWEETER \*\* LAFAVETTE L/C

12" WOOFER CROSSOVER NETWORK \*\* SYSTEM RESPONSE 30
16.000 cps

Here is an outstanding 3-way high fidelity speaker system which we are indeed proud to be able to offer. It includes a group of speakers custom-made for Lafayette by Goodmans, famous English manufacturer of some of the world's best high fidelity speakers. The system is ideal for installation in Lafayette bass reflex speaker enclosures, and provides the extremely wide range of 30 to 16,000 cps (8 db down at 20,000 cps) smoothly and without unpleasant peaks. Power bandling capacity of the system is 30 watts of integrated program material. Included in the system are the Lafayette-Goodmans SK-102 12" woofer covering the range from 30 to 700 cps, the Lafayette-Goodmans SK-104 compression -driver lafayette - Goodmans SK-104 compression -driver lafayette -Goodmans SK-104 compression -driver capacitance (L/C) crossover network with attached Brilliance (high-frequency) and Presence (midrange) controls. System impedance is 16 ohms. This is a really great system at an unusually low price! Shog, wt., 25 lbs.

SY-163WX tofoyette-Goodman 3-Way Speaker. System 200 Down 10,000 cps.

SY-163WX Lafayette-Goodman 3-Way Specker System ...... 2.00 Down ...... Net 49.50



An outstanding 3-way speaker system similar to SY-163 system above, but featuring the new SK-101 13" Lefayette-Goodmans woofer for extro high efficiency even at subaudible frequencies. System response 25 to 16,000 cps. Complete with LN-5 crossover network and SK-103 8½" midrange speaker and SK-104 tweeter. A superb speaker system with wide, smooth response and a new low in distortion and tane coloration.

#### LEADING SPEAKER MFR'S! Made to Lafayette's own rigid specifications LAFAYETTE-GOODMANS 15" WOOFER

### LAFAYETTE-GOODMANS 12" WOOFER

A highly-efficient low-frequency transducer for faithful reproduction of the lowest audible frequencies without tone coloration or distortion. Incorporates high flux Alcomax magnets for smooth response and good power sensitivity. Frequency response is 30-7,000 cps, with recommended crossover at 700 to 1000 cps. Total flux is 89,500 maxwells; voice coil diameter is 134". Rated at 30 watts power handling capacity tor integrated program material in a multiple speaker system with an LC crossover network. Voice coil impedance 16 ohms. Size 124/" diam. x 6" deep. Shpg. wt., 9 lbs.

SK-102 12" Lafoyette-Goodman Woofer..2.00 Down..Net 23.50

### LAFAYETTE- 8 1/2" MIDRANGE SPEAKER

A sweet-sounding high-fidelity oproducer capable of doing full justice to the most important range of musical reproduction—the midfrequency range from 500 to 5,000 cps. Incorporates high-efficiency Alcomax magnets, a specially-constructed cone with an "accordion fold" half-way down for smooth sound reproduction free from peaks and distortion; plus a completely sealed rear housing to prevent back radiation and interaction with other speakers. Response is 500 to 8,000 cps. Recommended crossovers are 700-1000 cps at the low end, 5,000 cps at the high end in a 3-way system. Magnet total flux is 32,900 maxwells. Voice coil diameter is 1". Power rating slux is 32,900 maxwells. Voice coil diameter is 1". Power rating Size is 83%" diam. x 33%" deep. Shog. wt., 4 ibs.

SK-103 81/2" Lafayette-Goodmans Midrange Net 5.95

#### LAFAYETTE-GOODMANS high frequency DRIVER and HORN

A highly efficient compression-type wide-angle radiator for the higher audio frequencies. With high flux Alcomax magnets. Rigid plastic horn with circular mouth and special design acoustic chamber with phasing plug achieves smooth wide-angle distribution to extremely high frequencles. Horn diameter 2½", mouth opening 1½" diam. Pot diameter 2½", mouth opening 1½" diam. 16,000 cps; 8 db down at 20,000-cps; Magnet flux is 25,400 maxwells. Voice coil diameter is 1". Recommended crossover is 5,000 cps. Power rating is 30 watts program material in a 3-way system. Voice coil is 16 ohms. Shept wit, 3 lbs.

SK-104 Lafayette-Goodmans Tweeter .... Net 10.95



SK-104

55.50


ONLY \$5.00 DOWN

## Famous 3 -WAY SYSTEM

SK-101

EXPLODED VIEW SHOWS HOW SYSTEMS MOUNT IN CABINET

with 15" WOOFER...8" MID-RANGE SPEAKER... HORN TWEETER... **CROSSOVER NETWORK** 



• 15-INCH WOOFER WITH 31.5 OZ. MAGNET (SK-67) 8-INCH MID-RANGE SPEAKER (SK-74)

. NEW HIGH-FREQUENCY ACOUSTICAL LENS TWEETER (HW-7)

. 3-WAY CROSSOVER NETWORK (LN-5)

Lafayette presents this outstanding 3-way speaker system designed for the high fidelity enthusiast who desires performance formerly possible in multi-speaker systems costing many times this price. You won't believe your ears when you hear the superb reproduction throughout the entire audio spectrum. The SK-67 15" woofer provides phenomenal bass response, the SK-74 8" speaker delivers full bodied, mid-range frequencies, and the HW-7 high frequency acoustical lens tweeter faithfully reproduces the highest audible frequencies. Crossover points at 350 and 5000 cycles are provided by the LN-5.3-way inductance-capacitance network with continuously variable presente and brilliance controls that adjust tone balance to personal taste. Shpg. wt., 25 lbs.

5.00 Dawn Net 55.50

#### HIGH FREQUENCY TWEETER WITH ACOUSTIC LENS DIRECT IMPORTATION MAKES THIS PRICE POSSIBLE!

FREQUENCY RESPONSE FROM 2000 CPS TO BEYOND AUDIBILITY
 LOUVERED ACOUSTIC LENS FOR UNIFORM SOUND DISPERSION
 HANDLES 25 WATTS OF POWER
 PRICED EXCEPTIONALLY LOW

New high frequency tweeter featuring a louvered acoustic lens for uniform sound disper-

lens for uniform sound dispersion and copoble of handling up to 25 works of distortion-free power. The directional tendency of high frequency notes is overcome by the notural wide dispersion angle of the short horn and the acoustic lens which disperses and radiotes the high notes smoothly throughout the entire listening area. The lens is detachable for panel mounting, with a separate base for the tweeter furnished for external mounting where desired. Aluminum voice coil has 16 ahms impedance. Size: 4½" long x 3" diameter, lens extends 2½". Requires a crossover network, preferably one with a level control, such as the LN-2. With full instructions. Shpg. wt., 5 lbs.

#### **FAMOUS LAFAYETTE HK-3 METAL-CASED CONE TYPE** HI-FI TWEETER

**OUTPERFORMS TWEETERS** COSTING MANY TIMES THE PRICE

FREQUENCY RESPONSE 2000 - 16,000 CPS HANDLES 20 WATTS OF POWER

**NEW! METAL CASED TWEETER** SPECIAL PRICE



FREQUENCY RESPONSE 3,000-16,000 CPS

HANDLES 20 WATTS OF POWER CHOICE OF 8 OR 16 OHM IMPEDANCE

LAFAYETTE 2-WAY CROSSOVER NETWORK **ADJUSTS TO EITHER 2500** OR 5000 CPS CROSSOVER FREQUENCY 7.95

A carefully designed capacitive inductive 2-way crossover network with crossover frequency easily set to either 2500 or 5000 cycles. Has a built-in continuously variable high-frequency "Brilliance" level control to match room acoustics perfectly. Control has a 2½ ft. cable to mount on rear or side of speaker cabinet, and a long shaft for thick wood panels. Has an attractive brushed-gold finish escutcheon plate. For use with 8-16 ohm speakers. Easily accessible screw terminals. Metal case 5½" L x 2½" H x 2½" 0. Camplete with simplified instructions. Shope. wt., 5 lbs.

N1., 3 los.

LN-2B 2-Way Crossover Network With Control......Net 7.95

#### NEW! 2- and 3-way L/C CROSSOVER NETWORK



2- OR 3-WAY CHOICE OF 4 CROSSOVER FREQUENCIES

6 CROSSOVER COMBINATIONS METAL CABINET BUILT-IN BRILLIANCE AND PRESENCE CONTROLS

This versatile unit can be used either as a 2-way or 3-way of db. per active network, simply by loosening a few screws on the rear terminates.

way or 3-way 6 db. per actave network, simply by loosening a few screws on the rear terminal by loosening a few screws on the rear terminal panel and shifting several wires. You can use this network for a 2-way system now, easily and quickly convert to 3-way later. Six crossover combinations are available—2-way crossover with 2000-3000 cycle or 5000 cycle crossover, and 300 and 2000-3000, 700 and 2000-3000 or 700 and 5000, 350 and 2000-3000, 700 and 2000-3000 or 700 and 5000 cycles—a total of four different crossover frequencies! Suitable for 8-16 ohm speakers. The network is housed in an attractive metal case, suitable for mounting inside enclosure or leaving out in the open. Two level controls—are mounted on the front penel. If desired, those level controls may be removed, along with the booutiful gleoming copper escutcheon plate, for external mounting; controls are wired with 3-foot long leads. High quality components are used for long life and top performance.

performance. LN-5 Lafayette L/C Crossever ...



# NEW! LAFAYETTE-GOODMANS

### HIGH FIDELITY SPEAKERS

MADE BY THE FAMOUS GOODMANS English M'f'r Of Some Of The World's Best Hi-Fi Speakers! CUSTOM BUILT TO LAFAYETTE'S OWN RIGID SPECIFICATIONS

(Suaranteed SUPER PERFORMANCE -YOU BE THE JUDGE! SATISFACTION OR YOUR MONEY BACK


TIME PAYMENTS

● 1% LB. TO 6% LB. MAGNETS OF "ALCOMAX"-THE MOST EFFICIENT MAGNETIC MATERIAL AVAILABLE! ● FREE-EDGED CONE SUSPENSION MADE BY EXCLUSIVE GOODMANS PROCESS • 12" AND 15" MODELS, ALL 3-WAY WITH SMOOTH LOW-, MID- AND HIGH-FREQUENCY COVERAGE ALL MODELS HAVE SPECIAL LOW-RESONANCE WOOFER CONES, STIFF MID-FREQUENCY RADIATOR COMES, COMPRESSION-DRIVER TWEETER HORNS • FREQUENCY RESPONSE 30-20,000 CPS • HIGH POWER-HANDLING CAPACITY ● MIGH EFFICIENCY WITH LOW-DISTORTION TRANSIENT RESPONSE ● WIDE BISPERSION-ANGLE TWEETER WITH SELF-ALIGNING ALUMINUM VOICE COIL & DIAPMRAGM • PLUG-IN 12 DB/OCTAVE CROSSOVER NETWORK WITH HIGH FREQUENCY LEVEL CONTROL SUPPLIED WITH ALL MODELS

SUPPLIED WITH ALL MODELS

LAFATETTE went to this leading English speaker manufacturer for these outstanding custom speakers to provide you with this SUPER-PERFORMANCE VALUE by direct importation. These speakers are all 3-way units, with woofer, mid-range radiator and tweeter all axially mounted to provide an efficient, low distortion, wide-range speaker system. Available in 12" and 15" models, all speaker system. Available in 12" and 15" models, all speaker employ extremely heavy Alcamax magneti—the most efficient magnetic material available—for converting electrical impulses to sound with minimum distortion, especially with musical program material. In the exclusive Goodmans process used in manufacturing the waafer cones of these speakers, the cone rolls and cone edges are bombarded with minute particles of specially-blended plastic ma-

reriats to form a virtually free-edged cone suspension with-out the usual joint faults found in so-called free-edged cones and all ministers about 100 m. and 100 m. out the usual joint faults found in so-called free-edged canes and eliminating standing waves and surround resonances. Frequency response of all models is 30-20,000 cps, vaice caits are all 16 ohms, Free-air waafer cane resonances are 25 cps for 15" models, 35 cps for 12" models. At 2000 cps the stiff-coned mid-frequency radiator provides smooth mechanical crossover; the compression driver tweeter has a rigid plastic horn with 2½" circular mouth, 1" diameter aluminum vaice cail and diaphragm in a self-aligning assembly with an air chamber and phose equalizer and utilizes the plug-in 12 db per active electrical network for smooth crossover at 5000 cps. The network has a high-frequency level control with attractive escutcheon and knob.



#### LAFAYETTE-GOODMANS 1½ LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

● 12" SPEAKER WITH 30-WATT POWER RATING ● 15" 35 WATTS WITH PLUG-IN 12 DR PER OCTAVE L/C CROSSOVER METWORK & L-PAD LEVEL CONTROL

#### SK-110 3-WAY 12" SPEAKER

Another highly efficient integrated 12" 3-way speaker system with response of 30-20,000 cps, cane resonance 35 cps, and power rating of 30 wotts program moterial, dimensions 7" overall depth, 12%" diam. Magnetic flux density 11,500 gauss; total flux 129,000 maxwells. 1%" density 11,500 gauss; rated frame. Otherwise the same su-voice coil. Rugged metal frame. Otherwise the same su-perior performance specifications as all other Lafayette-Goodmans speakers on this page. Shpg. wt., 20 lbs. SK-110WX 2.00 Dawn Net 47.50

SK-110WX 2.00 Dawn Net 47.50 GET 2 FOR STEREO Only 44.50 Eq. Net 

1% LB. MAGNETS 30-WATT 12" 47.50 L/C Crossover

12 db/Octave with L-Pad

35-WATT 15" 54.50




#### LAFAYETTE-GOODMANS 3½ LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

#### SK-112 3-WAY 12" SPEAKER

This is a 3-way lategrated 12" speaker system whose performance can only be compared, in other makes, to the very best available. The superior efficiency of the 3½ lb. Alcamax magnet with total flux of 185,000 maxwells plus the excellent constructional details. the exclusive Goodmans cane bonding and treatment process, the 35 cps cane resonance, the superb Goodmans harn-loaded compression-driver tweeter, the heavy, non-resonant dis-cost metal frame—all are combined to provide another LAFAYETTE SUPER-PERFORMANCE VALUE, made possible only by its custom specifications and by direct importation to save you maney. Specifications or similar to the other Lafayette-Goodmans 12" speakers listed on this page, except power rating is 40 watts program material, voice coil diam. is 1%" and overall depth is 8½". Shps. wt., 25 lbs. SK-112WX 5.00 Down Net 69.50 Cet 2 FOR STEREO Only 43.50 Eo. Net

SK-113WX 3-way 15" with 3% lb. magnet. Same as SK-112 but 15" speaker with 25 cps cone resonance, power rating of 45 watts, vaice coll diameter 2", total flux 201,000 maxwells. 8%" deep, 15%" diam. Shpp. wt., 30 lbs.
SK-113WX 5.00 Down Net 79.50
GET 2 FOR STEREO Only 72.00 Ea. Net

3½ LB. MAGNETS Crossover Network 40-WATT 12" 69.50 12 db/Octave 48-WATT 15" 79.50 L-Pad Control



#### LAFAYETTE-GOODMANS 61/4 LB. ALCOMAX MAGNET 12" AND 15" 3-WAY SPEAKERS

● 12" SPEAKER HAS 45 WATT POWER RATING ● 15" 50 WATT OCOMPLETE WITH PLUG-IN 12 DB PER OCTAVE L/C CROSSOVER NETWORK & L-PAD LEVEL CONTROL . HEAVY, DIE-CAST NON-RESONANT FRAMES

#### **SK-114 3-WAY 12" SPEAKER**

SK-114WX 5.00 Dawn Net 79.50
GET 2 FOR STEREO Only 73.50 Ea. Net

SK-115WX 3-way 15" with 6% lb. magnet. Same as SK-114 but 15" speaker, with power rating of 50 watts and cone resonance of 25 cps. 8½" deep, 15½" overall diam; re-quires 13" diam, baffle opening. Shpg. wt., 40 lbs ...Net 89.50 5K-115WX 

> 6% LB. MAGNETS 45-WATT 12" 79.50 50-WATT 15" 89.50



# NEW! LAFAYETTE 8" HI-FI SPEAKER

"MECHANICAL 2-WAY" SPEAKER OF UNUSUAL DESIGN • EXTRA-HEAVY MAGNETS.

EXTREMELY HIGH FLUX • RESPONSE 40-16,000 CPS • SPECIAL PATENTED CONE CONSTRUCTION AND MATERIAL FOR SMOOTH, DISTORTION-FREE RESPONSE . EXCELLENT FOR STEREO

A most unusual dual-cone construction is used in these extra-high-quality 8" speakers to economically provide the same type of wide-range frequency response normally found any in true coaxial speakers or multiples pooker systems. On the care 2 separate canes, acting through a Common voice mid-section of the woofer cane; both canes "float" on provided behind the woofer cane; both canes "float" on provided behind the woofer cane, results in mechanical crossovers to that both canes operate in phose of law frequencies, but only the tweeter cane operates of high frequencies. This gives improved high frequency directional

characteristics and minimum distartion. The patented cone moterials provide extremely smooth reproduction. Magnets are large and heavy, with flux density of 10,500 gauss and good transient characteristics, low distartion, and good reasons at either high or low sound levels. Terminals are screw-type for solderless connections. Sensitivity is 99,5 is 8" diam., 4½" deep; requires 6½" diam., 520 cm; voice coil is 8 ahms. Size ins. Shopp. wt., 5½ lbs.

SK-98 8" 2-WAY SPEAKER Only 18,95 Net

#### NEW! LAFAYETTE DUCTED-PORT BASS REFLEX SPEAKER ENCLOSURE • ECONOMICAL-SPACE SAVING • RECOMMENDED FOR STEREO • FOR 8" OR 6" SPEAKER


. NEW DESIGN FOR WIDE-RANGE RESPONSE IN A SMALL PACKAGE

An unusually-designed enclosure which extends low-frequency response to a remarkable degree. Incorporates a special long duct over the usual bass reflex port which acts together with the damping provided by the heavy acaustic padding to provide an unusual degree of efficiency and smoothness of response at law frequencies. Suitable for 8" or 6" wide-range or coaxial hift speakers. Made of hardwood veneers throughout, hand-rubbed to a high finish. May be shelf or table-top mounted. Available in Blande Mahagany, Mahagany, or Walnut finishes. Size 111½" https://dx.doi.org/10.1006/j.com/s.1511be.

14.50

CAB-29 Blonde Mahogany, Mahogany, or Wainut Enclosure.

Please specify your choice ..... Net 14.50






This new GE speaker provides outstanding quality and performance. New cone-edge woofer construction along with a special high-frequency auxiliary cone furnishes excellent frequency response from 30-15,000 cps. Power handling capacity is 25-watts, 8-ohms. Shpg. wt., 7 lbs.

2.00 Down ......

Net 34.25

### **ECONOMY HI-FI** COAXIAL SPEAKERS



#### ECONOMY 8" COAXIAL HI-FI SPEAKER

• IDEAL WIDE-RANGE BUDGET SPEAKER • PER-FECT FOR STEREO • RESPONSE 70-12,000 CPS • BUILT-IN CROSSOVER • 10 WATT RATING • 3.16 OZ. MAGNET

A fine coaxial high fidelity speaker with built-in electronic crossover. Rated at 10 warts, with response of 70-12,000 cps. Rigid, non-resonant frame, high efficiency 3.16 az. Alnica 5 magnet, specially-treated langlife cone, and gosket-sealed magnet cover cantribute ta its fine perfarmance. 8 ohm vaice call. Shpg. wt., 6 lbs. SK-92 LAFAYETTE ECONOMY SPECIALI Net 6,25

#### 12" COAXIAL SPEAKER

EXTENDED RANGE DUAL SPEAKER
SYSTEMI FOR FM OR AM RADIO,
TELEVISION, SOUND AND WIDE
RANGE RECORD PHONOGRAPHS.
QUICK, EASY, MODERNIZING REPLACEMENT OF OLD STYLE SINGLE RANGE SPEAKERS.

12" Alnica V PM with 1" vaice call and heavy one piece cane. Specially designed 3" Alnica V PM tweeter completes this combination speaker, range 40 to 15,000 CPS. Built-in high pass filter. Installs same as regular PM speaker, only two wires to connect. 6.8 az. Alnica V magnet. Impedance 8 ahm. Wt. 8 lbs.

### COAXIAL HI-FI SPEAKER RATED AT 20 WATTS

• 5" TWEETER

BUILT-IN 1800 CPS CROSSOVER

• RESPONSE 45-12,000 CPS

This dual-speaker system provides clean, extended response of 45 to 12,000 cps. Includes 15" woofer with coaxially mounted 5" tweeter and built-in 1800 cps crossover. Heavy, nan-resonant frame, anti-corrosion treated 6.8 oz. Alnico 5 magnet, 8 ohm voice coil. 20 watts power rating. Shpg. wt., 11 lbs.

SK-89 W LAFAYETTE ECONOMY SPECIALI Net 12.95

#### 6x9 "Twin-Tweeter" COAXIAL HI-FI SPEAKER

. EXCELLENT BASS RESPONSE

. BUILT-IN CROSSOVER

. ADD HI-FI TO AUTOS, TV. RADIO SETS

This 6" x 9" hi-fi coaxial speaker opens new possibilities This 6" x 9" hi-fi coaxial speaker opens new possibilities for high-fidelity reproduction. Compact enough for your car, for radio and television sets—and for the high-fidelity enthusiast with a space problem. Twin high-frequency tweeters are designed to cross over mechanically at 5000 cps. The excellent bass characteristics of the 6 x 9 woofer faithfully reproduce the low frequencies. High-energy Alnica 5 magnet; voice cail 3½" diam. Power handling capacity 4 watts (7 watts on peaks). 4" deep. Impedance 3.2 ohms. Shpg. wt., 2½ lbs.

SK-75 -- 6" x 9" hi-fi speaker...

#### ACOUSTIC BAND EXTENDER Converts Any 12" Hi-Fi Speaker To A Complete 4-Way System

. MOUNTS AXIALLY ON 12" SPEAKER ELIMINATES EXTRA CARPENTRY

3-WAY INTEGRATED SPEAKER

FROM 1,000

to 18,000 CPS

25 WATTS RATING



A real boan to the hi-fi enthusiast who has a single speaker and wants to extend the upper tanal range of his system and at the same time improve the vital middle ranges for better realism and fuller enjayment. The Acaustic Band Extender includes 3 acoustic channels in one housing. One channels, 1-3.5 kc, is a rear loading exponential dual flored harn energized by the rear of the driver diaphragm. The second channel, 3.5 to 5.5 kc, is a front-loading dual horn, while the third channel, 5.5 to 18 kc, is direct free operture loaded. Wide-angle sound radiation is assured by the design for thorough distribution of the added brilliance and presence supplied by this unit. The driver unit has a highly efficient 3.2 oz. Alnico 5 slug magnet and a custom-molded linen phenolic diaphragm for minimal distortion. Built-in 1000 cps high-pass filter. Universal mounting-rests within a 12" speaker—or may be maunted separately with a 10½" x 3½" rectangular cutout. Impedance 9 ahms; power handling 25 watts. Shpg. wt., 2½ lbs.



QUANTITIES LIMITED

Originally

21.95

# SAVE UP TO 75% on RCA GOLD LABEL SPEAKERS



QUANTITY LIMITED

### RCA 12" WIDE RANGE **HI-FI SPEAKER**

USED IN RCA \$600 CONSOLES-FREQUENCY RANGE 50-15,000 CYCLES

e same speakers used by RCA in their fine sets selling in the \$600.00 price range. This fine 12" wide range speaker covers fram 50 to 15,000 Cycles and has a heavy 6.8 oz. Alnico 5 magnet. Vaice Coil 8 ohms. Shpg. Wt., 6 lbs.

SK-168

RCA "GOLD LABEL" PM REPLACEMENT SPEAKERS

Fine replacement speakers — all with 3.2 ohm voice coil

STOCK NO.	RCA NO.	SIZE	WATTS	MAG (oz.)	LBS.	LIST	NET
SK-165	2693-1	4"x6"	3	.53	11/2	3.75	1,19
SK-172	24652	4"x6"	3	.68	11/2	4.20	1,29
SK-173	44652	4"x6"	3	1.47	11/2	4.75	1.75
SK-170	2688-9	5"x7"	4	.76	2	4.25	1.40
SK-166	22951	61/2"	4	1.0	2	4.90	1.59
SK-167	2673-7	61/2"	5	2.15	2	5.75	1.79

# afayette Exclusive scoop!

THE STANDARD "NEUTRODE" CASCODE TUNER

ard Coil 12-channel tuners that have been used in mare TV sets than any other. The "Neutrode" is an exact physical and electrical replacement for all previous Standard Coil cascade tuners, but is far superior in sensitivity and performance. Shaft is 6" long and can be cut easily to desired length—a perfect universal replacement. Supplied complete with 6CG8 and 6BN4 tubes and schematic diagram. Shpg. wt., 4 lbs.
TL-52—For 21 Mc. only

In Lars of 3. .. Each 13.25

13.25

SOUND TAKE-OFF COIL Designed for use with Cascade Tuner for T.V. Sets having separate video and sound 1.F.'s Standard Coil No. XM752. Shpg. wt., 2 oz. T5-309 Net 1.28

### Both a Radio and an Intercom

SAVE UP TO 75%

### LAFAYETTE "PHONE MASTER" RADIO-INTERCOM - BABY SITTER . SENSITIVE 5-TUBE SUPERHET

Quantity Limited

Here is the solution to your intercommunication problems. The Ladayette "Phone Moster" cambines a sensitive 5-tube superhet receiver and two-way intercom in two attractive units. Perfect far homes, fram kitchen to the front doar, fram living room to den, fram house to garage—in business, office to affice, department to department—on the farm, house to born. Ideal as an electronic boby sitter—so sensitive it picks up sound from more than 50 feet away. The radia may be played at the master or the remate unit. Camplete with master and remate stations and cannecting wire with two plugs. Dimensions (moster) 6½" x 4½" x 4" (remate) 1-9/16" x 2-13/16" x 3-3/16". Shpg. Wt., 6 lbs.

..... 2.00 Down .. Net 16.95

. TWO-WAY INTERCOM



### NEW LAFAYETTE "707" JET GERMANIUM RADIO

- TERRIFIC CONVERSATION PIECE FOR HOME OR OFFICE
- DOES NOT REQUIRE BATTERIES PLAYS INDEFINITELY
   SPECIAL CRYSTAL EARPHONE AND ANTENNA

A wanderful gift — Mount it in your den ar an your affice desk. This attractive, plastic malded a madel at the famous "Boeing 707" jet liner cantains a sensitive Germanium semi-canductor received A collapsible Ferrite Case antenna cail tunes the receiver thraugh the camplete broadcast bond, tenna clips to any nearby abject such as telephone ar window. Complete with Germanium Dicrystal earphane, clip an antenna and maunting stand. Size — 7" fuselage, 9" wingspread. St. vt., 1 lb.

#### **NEW! GRANCO FM RECEIVER**



2.00 Down

Smart, new design, cambined with advanced engineering, result in this versatile FM receiver. So campact it actually fits in the palm of your hand—yet its performance exceeds that of sets several times the size. Exclusive new ROYAL "G" FM tuner with Coaxial Frequency Control assures drift-free performance. Speaker and cabinet are specially designed for optimum acaustic response. Easy view window dial and fine vernier tuning for easy aperation. Powerful circuit provides highly efficient operation by use of multiple purpose tubes. Complete with built-in antenna. Available in choice of two-tone color cambinations. For 110 V. AC-DC. Size 9½" w x 4" d x 5" h. Shpg. wt., 5 lbs.

GRANCO 601P—Grey and White. List 29.95. Net 24.50 GRANCO 601G—Turquaise Green and White.

List 32.95

GRANCO 601R—Carat and White, List 32.95, Net 24.95

#### **NEW GRANCO** FM TUNER

18.75



#### NEW! GRANCO AM-FM RECEIVER



GRANCO 701P—Grey and White. List 39,95 Net 31.95 GRANCO 701G—Turquaise Green and White.

GRANCO 701R—Corol and White. List 42.95, Net 32.45

#### REGENCY FM TELEVERTER



. MAKES ANY TV SET AN FM RECEIVER COMPLETELY TRANSISTORIZED
 SIMPLY INSTALLED BY ANYONE

The Regency Model RC-103 TeleVerter makes ony TV set an FM receiver at the flip of a switch, yet does not interfere with normal TV reception. Utilizes the TV audia system and large speaker baffle to produce tone quality far superior to small table model FM receivers. Completely transistorized, its power source is 3 tiny pensight batteries with current drain so low (300 µA) that bottery life expectancy approaches shelf life. Simply installed by anyone in 5 minutes—the only connections necessary are to TV set antenna terminals and antenna. Meets FCC radiation requirements. Large easy-to-read dial and planetary drive make fine tuning easy and rozor sharp. Housed in attractive 41/2" x 6" x 41/2" plastic cabinet. Shgp. wt., 5 lbs.

T1-110. Regency RC-103— Net 14.94

## **NEW! "ROCKET" GERMANIUM RADIO**



- NO BATTERIES NO POWER NEEDED
- INCLUDES CRYSTAL EARPHONE & ANTENNA
- A COMPLETE RADIO RECEIVER

This authentic plastic malded space racket may not permit space travel, but the sensitive Germanium receiver it hauses is capable of receiving the entire brandcast band. Easy tuning is assured by the collapsible nose "antenna". Supplied with Germanium Diode, crystal earphone and clip an antenna. Size 4-1/6" H x 1-13/16" Diam. at base. Shpg. wt., 6 az.

Net 1.65

### **NEW! 2 TRANSISTOR RADIO**



BATTERY and EARPHONE

- COMPLETELY PORTABLE -- NO GROUND -- NO AERIAL EFFICIENT REFLEX CIRCUIT OVER SOO HOURS BATTERY LIFE LIGHTWEIGHT UNBREAKABLE PLASTIC CASE



An exciting gift for all ages, this small precision transistor radia pravides "Big Radio" performance over the camplete broadcast band. Campletely portable — it fits easily in your pocket, purse or hand. Requires na ground ar aerial — efficient reflex circuit with low power consumption, aver 500 hours of battery life per battery. Supplied with battery and sorphone. Shpg. wt., ½ lb.

F-504

Burgess 2U6 type (1-required). Shpg. wt., 2 oz. BA-178

### SPEED PHONO MOTOR WITH TURNTABLE

Quiet, dependable A-C aperation assured by rubber shock-mounted friction drive motar. Speed change cantrol through idler driving an 8" turntable. Mounting centers 4½ x 3½"; 2½" depth belaw base plate. Shpg. wt., 3½ lbs.

... Net 95e



### WIRELESS BROADCASTER

Play your phanograph through ony radio in the house without connect Talk through your radio by microphone.

Latayette's new wireless broadcaster will extend your enjoyment of your phono-player to every room that has a radia. Connect phono to wireless broadcaster, tune in any radia to the wireless broadcaster, which broadcasts an an adjustable frequency between 700KC - 1700KC. Pick your spot. Will take crystal or magnetic cartridges and also microphones for voice broadcasts. Has volume control with "on-off" switch. Size 47½ x 53½ x 1½". Completely wired and assembled with all tubes and operating instructions. 110V AC/DC operation. Shpg. wt., 4 lbs.

LA-14 Wireless broadcaster



BUY ON LAFAYETTE'S NEW EASY TERMS - SEE PAGE 44

# MORE LAFAYETTE SCOOPS! AT LOWEST DOWN PAYMENTS

### NEW! RECORDIO MODEL 592 "MAESTRO" SELF-CONTAINED STEREOPHONIC TAPE RECORDER

. AUTOMATIC PUSH-BUTTON CONTROLS

. COMPENSATED DUAL VOLUME CONTROL

. TWIN SPEAKER HI-FI SOUND

SPECIAL

List Price -219.50

lamplighter.



AN HONEST-TO-GOODNESS VALUE!

Press a button and rich high fidelity sound carries you right into the recarding studio. Brings you the wonderful realism and musical fullness of stereo reproduction. Plays stereo tope and records manaphonically. Its many outstanding features include: multipurpose inputs, external speaker and amplifier autputs, campensated dual valume speaker and of full 6 wort output. Frequency Response: 80 control, and a full 6 wort output. Frequency Response: 80 to 10,000 cps. Has record indicator for proper recording level, twin 5 x 7 extended range speakers and tane control. Roted at 40 db S/N ratio. Features a record inter-

lock to prevent accidental tope erasure. Papular dual speeds of 7½ and 3¾ is plus fast farward and rewind; and resettable tope indicator pointers. Handles up to 7" reels. Built-in starage compartment halds tope, reels. AC card, microphane and other accessories. Can easily be amployed as a public address system. Supplied with crystal microphane, 7" empty reel, 3" reel of tope, instruction book and patch card adapter. Size: 14½ x 15½ x 10". Shpg. wt., approx. 37 lbs. For 117V 60 cycle AC. RK-105WX... List 219.50...5.00 Down... Net 139.95

NEW! LAFAYETTE AUTOMATIC PHOTO-ELECTRIC "LAMPLIGHTER"

Lights on at sunset—off at sunrise

New photo-electronic, light sensitive switch turns lights on and off at dusk and down. Better than a clock—no setting and resetting of timer. Variance in "an-off" cycle adds extra protection when away from home. You need never come home to a darkened house. The controlled lomps ga on as darkness falls—stoy, an until sufficient day light returns or until manually turned off. Just plug it in for protection from proviers—to turn an sight lights—illuminate outdoor areas—light"up broaders—green houses—displays—show windows—any place you require automatic illumination. Mounts most any lower on rubber suction cup feet. Unabtrisive—measures only 4" x 2½" x 1½". Use on 117 volt AC only, Maximum 300 wotts lamp load. Instructions included, Shpg. wt., 1 lb. M5-759

Automatic Light Switch

### **BOAT OWNERS! HERE IS YOUR RADIO!**

8 TRANSISTOR MARINE SHORTWAVE AND BROADCAST PORTABLE RADIO -FOUR TIMES THE POWER OF ORDINARY PORTABLES!

- · COAST GUARD DISTRESS FREQUENCY
- . SHIP-TO-SHIP, SHIP-TO-SHORE
- . COMPLETE WEATHER REPORTS
- . MARINE OPERATOR
- ALL STANDARD AM BROADCAST STATIONS

SPECIAL 67

An amazing 8 transistor superhet partable receiver for the Marine Shartwave and AM Broadcast bands. Truly a reliable and enjoyable componion with remarkable tone and power even for out at seal Frequency Range: Marine band 1.5 to 4.5 Mc, Broadcast Band 335 to 1605 KC. Has 10 section 321/1" telescopic antenna plus auxiliary wire antenna for exceptional fringe area reception an Shortwave and AM. Plays up to 1000 hours on three 1.5 volt

SPECIAL 7 TRANSISTOR TABLE MODEL RADIO SPECIAL 3450
THE CORDLESS RADIO FOR MODERN LIVING PRICE 3450

• OPERATES ON FLASHLIGHT BATTERIES FOR ECONOMY

HIGH SENSITIVITY-CLEAR RECEPTION

..2.00 Down...

7 TRANSISTOR — 2 BAND AM AND SHORT WAVE RADIO LET THE WORLD'S TINIEST 2 BAND RADIO BE YOUR

"PASSPORT" TO FOREIGN COUNTRIES ON THE AIR

Finger-Flip Operation

· Powerful Reception

• FREQUENCY RANGE: S35-1605 KC (AM)

Here is an extraordinary miniature 7 transistor 2 band radio that is the tiniest 2 band radio made yet packs the wallop of a giant. Its superheteradyne circuit with 2 1.F. stages and a class B push-pull autput stage is highly selective and sensitive. It's so designed that a flip of your finger can easily manipulate the controlling thumb your finger can easily manipulate the controlling thumb wheels. Covers the full AM broadcast band as well as the foreign short-wave band of from 3.9 to 12 mc. Its sensitivity is enhanced by a built-in ferrite bar antenna and a telescopic rad antenna that can easily be plugged into a telescopic rad antenna that can easily be plugged into the antenna jack if necessary. Power is supplied by a readily accessible 9 valt miniature battery. Supplied with earphone, rad antenna, leather case and battery. 4½ x 3 x 1½"; Shaps. wt., 2 lbs.

LOW PRICE 4450



**GRANCO MUSICHRON** 

MODEL 705 POPULAR

FM-AM CLOCK RADIO

**OUTSTANDING FM AND AM** 

PLUS WAKE UP TO MUSIC

Regular Price 52.95

SPECIAL 1950 PRICE

3-TRANSISTOR

HEARING AID





HELP FOR THE HARD-OF-HEARING AT A PRICE TO SUIT ANY BUDGET!

50.00 Value

#### GRANCO MUSICHRON MODEL 605 FM CLOCK RADIO

- Superb FM Reception
- Smart Styling Wake-up-ta-music



Regulor Price

SPECIAL PRICE 3450

91/2" W x 4" D x 5" H. Snpp. Will, J. 2,00 Down Granco 605P Dove Grey and White. . 2,00 Down Net 34.50

Granco 605G Turquoise and White. . 2.00 Down Net 34.50 Granco 605R Coral and White: .2.00 Down .. Net 34.50 ALL OF ABOVE AT LAFAYETTE'S POPULAR LOW PRICE OF

A supreme achievement in engineering. All the advantages of both FM and AM reception plus that wonted wake-up-to-music extra. Six tube chassis with 8-tube performance by use of double duty tubes. Features latest Telechron electric clack with luminous hands and a sleep switch that allows up to 120 minutes of music before outomatic shut-off of radio; fifteen minute delay wake-up alarm; and built in antennos. Acoustically designed attractive cobinets in two-tone color combinations of Dave Grey and White; Turquoise and White; and Caral and White. 9½," W x 4" D x 5" H. Shop. wt., 5"lbs.

Granco 705P Dave Grey and White. 2.00 Dawn

NEW! GRANCO MODEL SR-1500 FULL STEREO RADIO THE MOST VERSATILE RADIO EVER PRODUCED!

- Complete FM-AM plus Stereo Tuning
- Automotic Keyboord Control
- 22 Tube Performance at Lafayette's

PRICE

Here's the perfect basic start for a complete modular stereophanic music system. These true stereophanic systems pick up or "hear" binaurally with "two ears" just as nature provides for normal listening. This binaural picks not recorded is projected right in your pulled in the authentic Stereophanic directional characteristics, tonal range and loudness level. Teatures: Complete FM-AM reception with simultaneous tuning for stereo broadcasts; exclusive Grancomatic Keyboard Control Panel for completely autamatic performance; based on the performance; exclusive Grance SR 1500 Fruitwood — 5.00 Down ... Net 149.95 Granca SR 1500 Fruitwood — 5.00 Down ... Net 149.95

NEW TIME PAYMENT PLAN AS LOW AS 2.00 DOWN SEE PAGE 44

Mercury STEREO GIFT RECORDS! LESS THAN HALF-PRICE!



\* CLASSICALS \* POPS \* NOVELTIES \*INSTRUMENTALS \*SHOW TUNES

Leave it to Loloyette to solve your ticklish gift problems — and to stack your own personal record collection with these much-wanted Mercury 12" Stereo LP's
— AT LESS THAN MALF-PRICE — and right in time
for the gift-giving season. The LARGEST and BEST
assortment of Mercury stereo discs to satisfy every
musical tosle. These are BRAND NEW FACTORYPRESM wanted recordings by TOP NAME ARTISTS.
Lawest priced at \$2.89 each, you can SAVE STILL
FURTHER by selecting FIVE for \$13.49. Get your
order in fost while stocks are complete. Please indicate
second choices. Include postage with your order —
ollowing 1 lb. per disc.

Reg. 5.98

13.49

Reg. Value 29.90

IN LOTS

OF 5

SR60000 — RICHARD HAYMAN CUBAN FAVORITES — 9 selections include Trop-ical Merengue, Love and the World Loves With Yau, Caminito, Rhopsodera, La Com-parso......STOCK NO. PR-110

SR60001 — LET'S DANCE, DAVID CAR-ROLL & ORCM. — A dozen delightful tunes including Cuddle Up a Little Closer, The Trouble With Harry, Let's Donce, The Glow Worm, Armen's Theme, Puerta Rican Ped-dler......STOCK NO. PR-111

SR60021 — WE COULD HAVE DANCED ALL NIGHT — Dance treats by Griff Wil-liams and his archestra, includes I Get A Kick Out of You, I Know That You Know, Isn't This A Lovely Day, Let's Fly Away. STOCK NO. PR-112

SR60035 — POLKA TIME — 40 minutes of accordionist Dick Contino in Pennsylvania Polka, Beer Barrel Polka, Hand Clap Polka, Hat Pretzels and Liechstensteiner Polka. STOCK NO. PR-113

SR600S6 — JOHN CALI, THE BANJO MINSTREL MAN — Banjo, borber shap STOCK NO. PR-114

SR60065 — SONGS FROM GREAT SHOWS — Clebanoff Strings play 12 favar-ites including 1've Grown Accustomed to Her Face (My Fair Lady), Bali Hoi (South Pacific), They Say It's Wonder (Annie Get Yaur Gun) and others. STOCK NO. PR-115

R60065 — OLDIES BUY
iriff Williams plays old and new fovorites
- Tea For Twa, Moonlight Serenade, Oh
ou Beautiful Doll, Brazil, Three Little
Nords, and mony others.
.STOCK NO. PR-116 SR60068 — OLDIES BUT GOODIES
Griff Williams plays old and new fovorit

SR60082 — JAN AUGUST — A dozen piano Cho-Cho selections including You're The Cream In My Coffee, Boogle Woogle Cho Cho, etc.....STOCK NO. PR-117

SR90001 — CARMEN SUITE—Music from Cormen and the L'Arlesienne Suites No. 1 and 2 with Poul Paray conducting the Detrait Symphony Orchestra, STOCK NO. PR-118

SR9Q002 — RHAPSODY IN BLUE — Eugene List in Gershwin's immortal Rhapso-dy and Concerto in F. Eastman-Rochester Symphony Orchestra under direction of Howard Honson.....STOCK NO. PR-119

Wark plus Ravel's Mother Goose Suite and Chabrier's Bouree Fantasque, directed by Paul Paray.....STOCK NO. PR-120

SR90009 — MUSIC OF LEROY ANDER-SON, VOL. 1 — Frederick Fennell arranges and canducts the Eastman-Rachester POPS archestra in Sleigh Ride and Bugler's Holiday, Sandpaper Ballet, Irish Suite, Sere-nade, Forgotten Dreams and many others. STOCK NO. PR- 121

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN

SR90016 — GAITE PARISIENNE — Antol Dorati and Minneapolis Symphony Orchestra in Offenbach's Ballet and the ballet from Strauss' Graduation Ball. STOCK NO. PR-122

SR90049 — GRAND CANYON AND MIS-SISSIPPI SUITES — Symphonic tone poems by Ferde Grafe played by Egistman-Roches-ter Orchestro, conducted by Howard Honse-STOCK NO. PR-123

SR90105 - MARCHING ALONG - Stir-

SR90109 - BOARDWALK PIPES - Robert Elmore at the world-famous Atlantic City Convention Hall organ. Numbers include Stors and Stripes Farever, Liebesfreud, Squirrel, Caprice Viennais, Morche Cham-petre, Stors In My EYES, Old Refrain, Fantosy on Nursery Themes and many others. STOCK NO. PR-125

SR90122 — BORODIN — Polovetzion
Music from "Prince Igor" performed by
Minneapolis Symphony Orchestra and large
charus under direction of Antal Darati Paired
with Rimsky-Korsakov's Le Cap D'Or Suite.
STOCK NO. PR-126

SR90156 — VERDI — Five overtures and preludes played by London Symphony Orchestra, conducted by Antal Darati. Forza del Destina, Vespri Siciliana, Nebucca, Travioto..........STOCK NO. PR-127

SK9017D—MARCH TIME—Eleven Marches played by Eastman Symphonic Wind En-semble conducted by Frederick Fennell in-cluding Guadalcanal March, Illinais March, March Grandioso, Americans We, The Mad Major.....STOCK NO. PR-128

SR90195 - RIMSKY-KORSAKOFF-Sche herazade, Symphonic Svite Op. 35 played by Minneapolis Symphony Orchestra with Rafael Druian vialin interpretations and conducted by Antal Darati. STOCK NO. PR-129

#### AMAZING OFFER OF RCA VICTOR RECORDS

60 YEARS OF "MUSIC AMERICA LOVES BEST"

This special 2 record monophonic set contains a fabulaus covalcade, featuring outstanding performances by these musical immortals:

CARUSO
RUBINSTEIN
MARIO LANZA
PAOEREWSKI
JOSE ITURBI
PAUL WHITEMAN

S by these musical immorto
TOSCANINI
JAN PEERCE
HEIFETZ
STOKOWSKI
BENNY GOODMAN
GLENN MILLER
AND OTHERS PR-102 2 Record Set - Shpg. wt., 2 lbs.

ARTIE SHAW TOMMY DORSEY PERRY COMO AMES BROTHERS DUKE ELLINGTON HARRY BELAFONTE

Net 3.38

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN

1812 OVERTURE AND BOLERO STEREO RCA VICTOR LSC-2345

ORCHESTRA AND BAND WITH CANNON AND BELLS CONDUCTED BY MORTON GOULD

contains a new, revolutionary antistatic ingredient which repels dust

List -9.96

2 RECORDS

### COMPATIBLE STEREO CARTRIDGES

G.E. VR-22 STEREOPHONIC MAGNETIC VARIABLE RELUCTANCE HIGH FIDELITY CARTRIDGE



MODEL VR-227 with .7 mil diamond stylus. Absolutely the finest of oll G.E. cartridges. This cartridge is made virtually hum-free by mu-metal shielding on top, entire front and coil assembly. Harmonic and intermodulation distortion are effectively minimized. Precise tracking and optimum compliance are assured by new stylus and aromature suspension system. The stylus is easily changed. Output is closely balanced over entire frequency range. A ground strap allows use of this cartridge with either 3- or 4-wire sterea systems. SPECIFICATIONS: Frequency response: 20-17,000 cps. Output: 6 mv. per channel at stylus velocity of 5.5 cm/sec. Channel separation; up

• FREQUENCY RESPONSE 20-17,000 cps • UP TO 30 DB CHANNEL SEPARATION VIRTUALLY HUM-FREE

• HIGH COMPLIANCE

to 30 db. Lateral compliance 3 x 10-6 cm/dynes. Vertical compliance: 2 x 10-6 cm/dynes. Recommended load, each channel: 47,000 ohms. Recommended Tracking force: 5 to 7 gms. Shpg. Wt., 6 az.

GE VR-227 5.00 Down Net 24.45 MODEL VR-225 with .5 mil diamond stylus. Designed for use with transcription arms and turntobles. Essentially the same as VR227 except frequency response 20-20,000 cps; loteral compliance 4 x 10-6 cm/dyne; recommended tracking farce: 2 to 4 gms. Shpg. Wt., 6 az.

GE VR-225 5.00 Down Net 27.39



#### SHURE MODEL M3D PROFESSIONAL DYNETIC COMPATIBLE STEREO CARTRIDGE

A premium maving-magnet cartridge designed specifically for the critical listener wha appreciates accuracy and honesty in sound reproduction. Campletely compatible, it plays both stereo and monoural discs. The cartridge features law distartion, law needle talk, high autput, minimum hum pickup and no magnetic attraction to steel turntable, plus the following specifications: Response, 20 to 15,000 cps. Channel separation, more than 20 db throughout the critical stereo frequency range. Compliance, 4.0 x 10-6 cm/dyne. Tracking force, 3 to 6 gm. Fits all 4-lead and 3-lead cartridge halders. With 0.7 mil diamand stylus, easily replaceable.

Model M3D - Shpg. wt., S oz. Net 44.10

#### SHURE MODEL M7D CUSTOM STEREO Dynetic CARTRIDGE

A new maving magnet stereo cartridge with .7 mil diamand stylus. Frequency response: 20 to 15,000 cps. Channel separation: Mare than 20 db at 1000 cps. Output valtage: 5 mv per channel of 100 cps. Vertical and lateral campliance: 3.5 x 10.6 cm/dyne. Recammended load impedance is 47,000 ahms. Tracking force: 4 to 7 grams. Tracks perfectly in all record changer arms. Has 4 terminals; adaptable to 3 terminal arms. Shpg. Wt., 5 az. SHURE M7D 5.00 Down Net 23.52 Stereo stylus assembly far M7D, including .7 mil diamand. SHURE N7D Net 11.76

#### AUDIOGERSH "STEREOTWIN" VARIABLE RELUCTANCE MAGNETIC STEREO CARTRIDGE

FOR MICROGROOVE MONAURAL & STEREO RECORDS



The Audiogersh "Stereotwin" madel ST-200 voriable reluctonce magnetic stereo cartridge incorparates all the excellent features of its monoural companion line, the fomous "Miratwin" cartridges. This new cartridge, which can be used for superior reproduction with all LP and 45 rpm microgroove records as well as with the new stereo discs, has a frequency response of 30-18,500 cps  $\pm 2$  db; autput is 25 millivalits at 1000 cps with a recarded velacity of 10 cm/sec and is smooth, free from resonant peaks, with excellent transient response. Compliance is 4 x 10-6 cm/dyne; crass-channel madulation tess than 20 db; recammended load is 37,000 ahms. Stylus is easily replaceable, and the cortridge fits into all stondard tone orms. Recommended tracking farce 4-6 gms. With single 1/2 mil diamond stylus. AUDIOGERSH ST- 200 STEREOTWIN ...... Net 17.95





A FANTASTIC LAFAYETTE SCOOP!

RCA VICTOR 10 RECORD STEREO LP ALBUM

STEREO FOR THE JOY OF IT

Classical Music of Today In The Sound of Tomorrow

LIST VALUE <del>60.00</del>

SPECIAL PRICE

for 10 RECORDS and ALBUM QUANTITIES LIMITED

HERE ARE THE CONTENTS

Contains 10 Stereo 12" LP records in a superb colored album with specially designated pockets for each recard. Includes an illuminating foreward an Stereo plus detailed pragram notes for all of the selections. Performances are by the world's most lamous archestros, soloists and conductors.

RECORD 4 — HI-FI FIEDLER — Rimsky-Korsakaff Suite from "Le Coa d'Or" — Rassini Overture to "William Tetl" — Tschaikovsky Morche Slov. Boston Paps Orchestra, Arthur Fiedler, Conductar.

RECORD 5 — Copland — BILLY THE KID — Ballet Suite — BILLY THE KID WALTZ — RODEO. Mortan Gauld and his Orchestra.

RECORD 6 - Brahms CONCERTO IN D. Op. 77 - Jascha Heifetz Violnist; Chicaga Symphony Orchestra, Fritz Reiner,

RECORD 7 - Soint-Saens CONCERTO NO. 2, IN G MINDR, Op. 22
Fronck SYMPHONIC VARIATIONS, Artur Rubinstein,
Pianist; Symphany of the Air, Alfred Wollenstein, Canductar.

RECORD 8 - Moussergsky-Revel - PICTURES AT AN EXHIBI-TION - Chicaga Symphany Orchestra, Fritz Reiner,

RECORD 9 - Revel BOLERO: LA VALSE: RAPSODIE ESPAG-NOLE-Debussy PRELUDE TO THE AFTERNOON OF A FAUN - Boston Symphony Orchestro, Charles Munch, Conductor.

RECORD 10 - Prokofieff LIEUTENANT KIJE, Op. 60 - Stra-vinsky SONG OF THE NIGHTINGALE - Chicago Symphany Orchestro, Fritz Reiner, Conductar.


RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN

THIS IS A TREMENDOUS BUY! ONE OF THE BEST EVER! PR-100 10 Record RCA Stereo Albi

Page 23

......Net 24.95

# NEW Bogen 12 WATT FM-AM COMPLETE STEREO PHONO SYSTEM

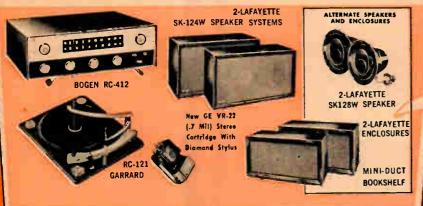

#### COMPONENTS

BOGEN RC-412 12-WATT COMPLETE STEREO RECEIVER	
(Less Cabinet)	169.50
GARRARD RC-121 CHANGER (Less Base)	41.65
NEW GE VR-22 (.7 MIL) STEREO CARTRIDGE WITH	
DIAMOND STYLUS	24.45
2-LAFAYETTE SK-124W HIGH COMPLIANCE BOOKSHELF SPEAKER S	YSTEMS
@ 17.50	35.00

Regular Catalog Price 270.60 LAFAYETTE SYSTEM PRICE 216.48

You save 54.12 10,00 Down

Complete stereo system as listed above. Shpg. wt., 64 lbs.

HF-608WX 10.00 Down Net 216.48
G-201W. Metal Enclosure and legs for RC-412 8.50

Same as HF-608WX, but with 2 Lafayette SK-128W 8" Ultra-Linear Duaxial speakers and Lafayette CAB-47WX Series Mini-Duct Baakshelf Enclosures (specify finish) instead of SK-124W Speaker Systems. Shpg. wt., 92 lbs.

HF-609WX 10.00 Down Net 262.72

Lafayette Wood base cut for above Mahagany, Walnut, or Blande Net ..... 3,95



### **HARMAN-KARDON 30-WATT** STEREO PHONO SYSTEM

COMPONENTS

HARMAN-KARDON A230 30-WATT STEREO AMPLIFIER. (Less Case) . . 109.95 GARRARD RC-121 CHANGER (Less Base) 41.65 NEW GE VR-22 (.7 MIL) STEREO CARTRIDGE WITH DIAMOND STYLUS . 24.45 

LAFAYETTE SYSTEM PRICE 189.50

YOU SAVE 45.55 5.00 DOWN HF-640WX. Complete stereo system as listed above.
Shpp. Wt., 90 lbs. 5.00 Down Net 189.50
HF-643WX. Some as 640WX, plus choice of either 2 Lafayette Eliptoflex Series Bookshelf Enclosures or 2 Lafayette CAB-16WX Series Resonator Enclosures (specify enclosure and finish).
Shpp. Wt., 90 lbs. 10.00 Down Net 247.50
G-217W. Enclosure far Harman-Kardon A230 7.95
Same as HF-640WX, plus Harman-Kardon T-230 AM-FM Stereo Tuner (with enclosure). Shpp. Wt., 118 lbs.

enclosure), Shpg. Wt., 118 lbs.

MF-641WX. 10.00 Down

Lofayette Woodbase cut far above. Mahogany, Walnut or Blonde

### **NEW GENERAL ELECTRIC 56-WATT** STEREO PHONO SYSTEM



COMPONENTS

GE SÓ-WATT STEREO AMPLIFIER
GARRARD RC-88 STEREO CHANGER (Less Base) NEW GE VR-22 (.7 Mil) DIAMOND STEREO CARTRIDGE

LAFAYETTE SYSTEM PRICE

Land Bay You save 104.72

10.00 Down

Complete stereo system as listed Shpg. wt., 143 lbs.

HF-627WX 10.00 Down Net 418.89

HF-627WX, but with 2 Lafayette SK-58 12"

speakers instead of the GE G-506 speaker systems and speakers instead of the GE G-506 speaker systems and speakers instead of the GE G-506 speaker systems and speakers instead of the GE G-506 speaker systems and speakers are a Lafayette Elipidetic Series Resonator Enclosures (specify enclosure and finish). Shpg. wt., 117 lbs.

Net 328WX 10.00 Down Net 324.50

Enclosures (specify enclosures of the control of th

.......

# Lafayette 35-WATT

### STEREO HI-FI PHONO SYSTEM

69.50 41.65 24.45 35.00 2-LAFAYETTE SK-124 BOOKSHELF SPEAKER SYSTEMS @ 17.50.

Regular Catalog Price 179.60

LAFAYETTE SYSTEM PRICE

<del>1</del>7.5

5.00 Dawn

Each component represents the utmost in flexibility, quality and value.

and value.

Foremost is the new LA-235
35-watt stereo amplifier (17½watts per channel) which acts
as a complete stereo control
center.

The famous Garrard RC 121/

center.

The famous Garrard RC 121/11 combined with the new GE VR-227 insures perfect repro-

VR-227 insures pertect reproduction.

e 2-Lafayette SK-124 Bookshelf Speaker System finished on 4 sides in mahogany or walnut provide a smooth, distortion-free response normally found only in multiple speaker systems.

Complete stereo system as listed above. Shpg. wt., 70 lbs.

HF-748WX
5.00 Down Net 149.50

### SCOTT 24 WATT STEREO PHONO SYSTEM



SCOTT 222 STEREO AMPLIFIER (Less Case)
GARRARD RC-121/II STEREO CHANGER
41.65
NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
2 STEPHENS 80 FR 8" SPEAKERS @ 33.50
Regular Catalog Price 273.03

SYSTEM PRICE 218.45

You Save 54.60

139.95

LAFAYETTE SK-124 SPEAKER SYSTEMS

● SELECT YOUR OWN CARTRIDGE ●
You may substitute the Shure M7D, Pickering 371.7D or the new
Electra-Vaice 31MD7 in any system shown with the GE VR-22 at no
additional cost, The Shure M3D may be substituted at an additional
cost of \$24.00

#### COMPLETE FISHER FM-AM STEREO PHONO SYSTEM

FISHER TA-600 STEREO TUNER AND AMPLIFIER (Less Cabinet)
GARRARD RC-88 DELUXE CHANGER
NEW G.E. VR-22 (.7 MIL) DIAMOND STEREO
CARTRIDGE

2-UNIVERSITY 312 12" TRIAXIAL SPEAKERS @ 71.54 143.08
Regular Catalog Price -575.34

You Save LAFAYETTE SYSTEM PRICE 115.06

10.00 Down

460.28

Please specify finish.) 5.00 Down Set of 2 37.30 HF-572WXSame as HF-571, but with 2 SK-114 12" 3-way speckers with 6¼ lb. magnets and 2 Lafay-ette Eliptoflex Series speaker enclosures, (please specify finish) Shpa. wt., 170 lbs. ...10,00 Down Net 575.54 Lafayette Woodbase cut for RC88. Specify Ma-hagany, Blande or Walnut finish. .....Net 3.95



## HARMAN-KARDON 60- WATT STEREO PHONO SYSTEM HARMAN-KARDON A-260 DUAL PREAMP & 30-WATT

58.31 

HF-645WX. Complete stereo system as above. Shag. W 125 lbs. 10.00 Down Net 339. HF-646WX. Same as HF-645WX, plus choice of eit? 2 Lafayette Eliptoflex Series Bookshelf Enclosures or Lafayette CAB-16WX Series Resonator Enclosures (specienclosure and finish). Shag. wt., 173 lbs. 10.00 Do. Net 399.

G-219W. Enclosure far Harman-Kardon A-260 ...12.95
HF-647WX. Same as HF-645WX, but with 2 Lofayette.
Goadmans SK-114 12" spookers with 6% 1b. magnets instead at Jensen H-223F spookers and chaice of either 2 Lofayette CAB-16WX Series Resonator Enclosures (specify enclosure and finish). Shpp. wt., 217 lbs. ... 10.00 Down ... Net 433.16
Same as HF-645WX, but with Harman-Kardon F-250 FM Tuner. Shpp. Wt., 150 lbs.
HF-686WX ... 10.00 Down ... Net 442.50
Lofayette Woodbase cut for above. Mahagany, Walnut or Blande. ....Net 3.95-

New GE VR-22

(.7 MIL)

STEREO

CARTRIDG

DIAMOND

PILOT 240 30-WATT STEREO HI-FI PHONO SYSTEM PILOT 240 30 WATT STEREO AMPLIFIER
GARRARD RC/121/11 CHANGER (Less Base) 129.50

NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE 2-ELECTRO-VOICE SP12B 12" SPEAKERS@34.50

You Save 52.84 Regular Catalog Price 264.20

Recommended enclosures for HF-570 system are the: CAB-16 Series Resanator Enclos-ure or Lafayette Eliptoflex Series Bookshelf Enclosure. - (Please specify finish). 5,00 Down Set of 2 57.50 HF-574WX Same as HF-573,



#### **NEW GENERAL ELECTRIC 40-WATT** STEREO PHONO SYSTEM

Regular Catalog Price

Regular Catalog Price 3-69-83

LAFAYETTE SYSTEM PRICE
29588 You save 73.97
10.00 Down
Camplete stereo system as listed above. Shpp. wt., 99 lbs.
HF-625WX 10.00 Down Net 295.88
Some as HF-625 WX, plus GE FA-17 FM-AM Tuner finished in saddle brown, or FA-15 Tuner in beige, ar FA-16 in white. Shpp. wt., 114 lbs.
HF-626WX 10.00 Down Net 405.48
Lafayette Waadbase cut far above. Mahagany, Walnut or Blande

119.95 41.65 24.45 69.58



### BOGEN 60 WATT STEREO PHONO SYSTEM



BOGEN D8230A STEREO AMPLIFIER

(less Cabinet)

GLASSER-STEERS GS-77 STEREO CHANGER

(less Base)

NEW GE VR-22 (.7 Mil.)

DIAMOND STEREO CARTRIDGE
2-UNIVERSITY 312 SPEAKERS @ 71.54

143.08

2-UNIVERSITY 312 SPEAKERS @ 71.54

Itsied above. Shpp. wt., 74

at listed above. Shpp. wt., 74

bis. 10.00 Down Net 333.23

bis. 10.00 Down Strike Fine Colored at listed above. Shpp. wt., 170 lbs. 10.00 Down

(Please specify finish).Net435.00

G-188W Bogen CEG cabinet with legs for DB230 ......Net 8.00

**BOGEN 24-WATT STEREO** PHONO SYSTEM

BOGEN DB212 24 WATT STEREO AMPLIFIER (Less Cabinet)
GARRARD RC121/II STEREO CHANGER (Less Base)
NEW GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE
2-UNIVERSITY UC 122 @ 34.79



Regular Catalog Price -255:63

LAFAYETTE SYSTEM PRICE

You Save 51.12

HF-568WX Complete Bogen system as listed above. Shap, wt., 61 lbs. 10.00 Down ... Net 204.51 MF-569WX Same as MF-568 but with 2-Lafayerte SK-58 12" Coaxial speakers and 2-CAB-16 Series Resonator Enclosures. Shap. wt., 137 lbs. 10.00 Down Net 249.50

### PILOT 245A 40 WATT STEREO HI-FI PHONO SYSTEM GE VR-22 (.7 MIL) DIAMOND STEREO CARTRIDGE LAFATETTE ELIPTOFLEX SERIÉS BOOKSHELF ENCLOSURES PILOT 245A 40 WATT STEREO AMPLIFIER GLASSER-STEERS GS-77 STEREO CHANGER 199.50

GLASSER-STEERS GS-77 STEREO C (Less Base)
NEW GE VR-22 (.7 MIL)
DIAMOND STEREO CARTRIDGE
2-ELECTRO VOICE 12TRXB
12" SPEAKERS @ 61.68

finish). 5.00 Down Set of 2 \$7.50

HF-580WXSome as HF-579 but with
2-Lafayette Famous Free Edge
2 Lofayette Eliptaflex Series
Boal State Eliptaflex Series
Boal S

2-ELECTRO VOICE 1210.

12" SPEAKERS & 61.68
HF-579WX Complete stereo system as listed above. Shpg. wt., 71
Ibs., 10.00 Down. Nel 330.35
Recommended enclosures for HF579 system are the CAB-16 Series
Resonator Enclosure.
Lofayette Eliptotlex Series Book shelf Enclosure. (Please specify finish), 5.00 Down Set of 2 57.50
HF-580WX Some as HF-579 but with
HF-580WX Some as HF-579 but with
Language Series Books and S 59.50

• SELECT YOUR OWN CARTRIDGE • You may substitute the 5hure M7D, Pickering 371.7D ar the new Electra-Vaice 31MD7 in any system shown with the GE VR-22 at no additional cost. The 5hure M3D may be substituted at an additional cost of \$24.00 cost of \$24.00



SCOTT 40 WATT STEREO PHONO SYSTEM
SCOTT 299 40 WATT STEREO AMPLIFIER
(Less Cage)

GLASSER-STEERS GS-77 STEREO CHANGER (Less Base)
NEW GE VR-22 (.7 MIL) DIAMOND STEREO
CARTRIDGE 59.50

DGE 24.45
2-UNIVERSITY 312 12" TRIAXIAL
SPEAKERS @ 71.54 143.08 Regular Catalog Price 426.98

LAFAYETTE SYSTEM PRICE

You Save 85.38

10.00 Down

HF-587WXComplete stereo system as listed above. Shpg. wt., 70 lbs. 10,00 Down. Net 341.60 Recommended enclasures for above system are the CAB 16 Series Resonator Enclosure or Lafayette Eliptoflex Series Bookshelf Enclosure. (Please specify finish) 5.00 Down Set of 2 57.50 MF-588 WXSome as MF-587, but with 2-Lafayette SK112 12" 3-Way speakers with 3½ 1b magnets and 2 Lafayette Eliptoflex Series Bookshelf Enclosure. Shpg. wt., 147 lbs. 10.00 Down Net 406.50 PK-350W Model GSB Woodbase for GS-77 in ebany with softin brass trim or unfinished. Net 9.60 6-147W Scott Crase for Scott 2094 Amplifier. Net 9.60

G-147W Scott C cage for Scott 299 Amplifier Net 9.95



# COMPLETE HARMAN-KARDON FM-AM STEREO PHONO SYSTEM H-K TAZ30 STEREO FESTIVAL (Less Cage) 259.95

H-K TA230 STEREO FESTIVAL (Less Cage)
GLASSER-STEERS GS-77 (Less Base)
NEW GE VR-22 (.7 MIL) DIAMOND STEREO
CARTRIDGE
2-ELECTRO-VOICE 12TRXB 12"SPEAKERS @ 62.68

LAFAYETTE SYSTEM PRICE 375.42

You Save 93.84



GAS ENGINE POWERED

LIST 8.50

LIST 9:00. READY-TO-FLY • "BIG PLANE" DETAIL!
FULLY ASSEMBLED — WITH ENGINE!



ALL ALUMINUM "AIR CELL" WIRING!
 ONTEST TYPE .049 SPACE BUG ENGINE!

The "greatest" in madel flying. Unmatched far true aircraft flight characteristics.
Unchallenged in power and performance. Features the cantest type national champion ,049 Space Bug engine. The 24½" all aluminum "Air Cell" wing is fully farmed for "big plane" performance. 18" gleaming white fuselage of highest impact plastic is smartly decarated with typical "real" insignia. The finest "ready-ta-fly" model you can buy! Shpg. wt., 3½ lbs.



filler hase

Skylan reel

SUPER ACCESSORY KITS

EVERYTHING YOU NEED FOR POWER MODEL OPERATION

Everything You Need For Power Model Operation

Super Kit for planes: Each accessory tharaughly tested for dependable operation. Includes Skylan reel with Dacran flying lines, finguard, filler cap, stainless steel strainer, line snaps, filler hase, glaw plug clip and glaw fuel. Less battery. Shpg. wt., 1 lb.

F-512

Net 2.23

Super Kit for Boats: Contains glow fuel, filler cap, stainless steel strainer, hase, bottery wires, glow plug clip, hydio handle, tether lines, bridle, wrench and finguard. Shpg. wt., 1 lb.

Super Cub

• 171/2" WING SPAN! • OFFICIAL CAP INSIGNIAL . READY-TO-FLY!

Warld famous far ease ah handling—smooth flying-maneuverability. Designed from the plane chasen far all-weather CAP patrol duty. Taugh and rugged — af hi impact styrene. Realistic appearance. Transparent enclased cabin — lots af authentic detail molded in. Famous Baby Bee, .049, 1/2 A engine. Long III'e nylan prap. Unbreakable spring starter. 171/y" wing span — 12" fuselage — afficial chrame yellaw calaring. Shps. wt., 2 lbs.

F-521 Net 5.95

PROP-ROD "READY-TO-RACE"!
RACES "FREE" OR "TEATHERED"!

RACES "FREE" OR "TEATHERED":
For thrills-spills-speed-and sport! This prop-driven hat rad—modern as tamarraw—pravides all the thrills of action packed automabile racing. Either free running raad races—or teathered thunderbawl spins and spills. Na model racers are faster than this streamlined, 12" fireball. Salid, cost aluminum frame, machined aluminum wheels with racing tread tires, hi impact styrene body. Equipped with the .049 Baby Bee engine, nylon prap and unbreakable spring starter. Shpg. wt., 2 lbs.
F-518

MODEL

BOAT



#### RACER - SPEED BOAT DOUBLE KIT


INDIANAPOLIS RACER
 NASSAU SPEEDBOAT
 BATTERY POWERED MOTORS
 "SNAP TOGETHER" CONSTRUCTION

Easily assembled streamlined racer and ultra madern speedbaat. Racer is equipped with special racing wheels — baat has safe polyethylene propeller. Both af hi-impact plastic. Both equipped with miniature 1½ Valt motars, switches, leads, etc. Haurs af fun packed into two af our most popular kits. Shpg. wt., 2 lbs.

No. 1.249

KT-156 Double Kit
KT-153 Racer Kit anly
KT-154 Boat Kit anly
BA-157 1½V. Bat. (ane far each kit)





Pee Wee .020: Warlds smallest glaw engine. Weighs only 21 grams! Plenty of power to fly most ½A planes. Maximum power at 19,000 R.P.M., does practical wark right up to 22,000. Exceptionally lightweight and amazing power make it a free flight favorite. Shpg. wt., 4 azs.

F-515 Net



FLYING TIGER

20" WINGSPAN — 15" FUSELAGE!
 "BIG PLANE" REALISM!
 "COMBAT" MANEUVERABILITY!
 SUPER POWERED SUPERBEE ENGINE!

Flying scale madel of the mast famaus fighter plane of the past quarter century. The most accurate—mast camplete—ready to fly madel airplane you've ever seehl from prap spinner to rudder—from wheels to cackpit—every inch a richly detailed P-40 Flying Tiger! Pawered by the special Super Bee engine. Designed just for this planel Mast powerful engine af its size—for laaps, wingavers, cambot maneuvers, perfect flight control. Like a real plane—it can be flawn in "hot," brought in for a 3-point, or let down on the verge of a "stall." Hi impact styrene body—special nylan and vinyl fittings—official insignia—unbreakable spring starter—nylan prap. Shpg. wt.; 2½ lbs.

F-520

Net 7.49

LIST



• "Ready-to-Race" • True Step Hydroplane Design • 15" long-8¼" beam • Prop-powered for Real Speed

Takes to the words like a real hydra. Spray throwing turns and runs — free running ar teathered! Slam bang actian an any waterway — rivers, beaches, ar in the poal. Hi impact styrene with gleaming chrame fittings. Famous Baby Bee .049 engine provides plenty of power for real action. Nylan prop and unbreakable spring starter. Shpg. wt.; 2 lbs.

2.69

• REAL HYDROPLANE ACTION • IDEAL FOR THE BEACH
This Air Boat kit is your key to many hours of fun, not only to build, but to operate
at the beach, pond, lake etc. The kit contains model hull, center deck, top deck,
noutical decals, and motor housing. Motor is powerful 3V DC type and can be
switched off and on. Construction is a high impact styrene to prevent damage. Prapeller is made from safe, flexible polyethylene. Shpg. wt., 1% lbs.

Net 2.69

#### SUPER MICRO-MOTORS

- TWICE THE POWER!
- · PERMANENTLY LUBRICATED!

Expertly designed, minitature, D.C. permanent magnet motars. Ruggedized construction for industrial use. Highest power and speed to weight ratio of any minitature motor makes these a "natural" for models and remate cantral applications. Ferrite magnets preclude possibility of demagnetization and offer minimum weight. Unique, precision formed device permanently centers commutator in precise position. Utilizes phosphor-branze brushes and brass sleeve bearings. May be maunted by means of motor mount supplied or by means of tapped hate in materials. Avg. Shpg. wt., 4 az. Camplete with

Stock No.	Volt. Range	Drain Ma.	RPM	н.	w.	۱.	Shaft Die.	WI.	NET EA.	OF 3
F-403 F-404 F-405	1.5-4.5 3-6 1.2-16	200-300 250-300 90-140	5000-6000 6000-7000 8000-9000	11/4"	1 1/6"	1 1/2"	¥32" 3512" 452"	1 1/4 oz. 21/4 oz. 21/4 oz.	.69 1.10 1.39	.62 .98 1.25




#### NEW ELECTRIC PENCIL SET

MODEL 217

# Save 331/3 to 50% on MINIATURE-TRANSISTOR & R/C Equipment

#### NEW! Lafayette's SUPER-TROL R/C EQUIPMENT



(A) RADIO CONTROL TRANSMITTER: Assembled-tested-guaranteed, No license examination required for operation. Crystal controlled for stability and to meet F.C.C. regulations. Uses powerful 3A5 tube for range of approximately one mile. Will operate any 27.255 mc R/C receiver. Overall dimensions only  $8\frac{1}{2}$ " x  $2\frac{3}{4}$ " x  $1\frac{3}{4}$ " - just a handful! Includes antenna – tube – crystal – and instructions. Less Batteries. Shpg. wt.,  $2\frac{1}{4}$  lbs.

F-249

Batteries required: BA-124 Burgess U30 (3 needed) 1.75 ea. BA-157 Burgess #2 (1 needed). . .13 ea. (B) RADIO CONTROL RECEIVER: Completely wired and tested receiver—extremely sensitive and stable. Completely enclosed—ideal in boats—or case may be removed if desired. Ingeniously constructed to withstand vibration and shock. Features external fine tuning—antenna "snap" lead—plug for power and actuator connections. Ideal Companion for F-249 Transmitter and F-327 Servo shown elsewhere on this page. Requires one 1.5V battery and one 67.5 Volt battery. Size determined by use. Measures only 3" x 2¾" x 1½". Complete with tube and instructions. Less batteries. Shpg. wt., 8 oz.

Batteries required: BA-130 Burgess UX45 (1 needed) ..... 2.07 ea. BA-157 Burgess No. 2 (1 needed) ...... .13 .ea F-208

SPECIAL COMBINATION OFFER

mbination Cansists of R/C Transmitter (F-249), and R/C Receiver (F-208) ...... 2.00 Dawn ......Net 22.90



### "JEWEL" REMOTE CONTROL RELAY

#### 27.255 R/C CRYSTAL



Reg. 2.95

Specially manufactured far Lafayette. Designed specifically for use in R/C model planes, boats, cars, etc. Low-drift — high autyput — dependable frequency control. Talerance .04%. 13/16" wide x 7/16" deep x 1½" high above pins. Pins on ½"



MATCHING\_CRYSTAL SOCKET:

RETRACTS to 9 INCHES with PLASTIC CASE



#### LAFAYETTE PNP AUDIO TRANSISTOR





.59

General audia type PNP transistor for experimenters and hobbyists, for cade practice ascillators and similar small signal devices. In new JETC 30 welded case.

Net, singly, each 37 ¢ 10 far 4.50, 50 far 19,50, 100 for 37.00

#### ANOTHER LAFAYETTE FIRST!

TOSHIBA, HITACHI AND NEC HIGH QUALITY REPLACE-MENT TRANSISTORS FOR POPULAR JAPANESE TRAN-SISTOR RADIOS.

SERVICEMENS' SPECIALS!

AS LOW AS				
FACH	TRANSISTOR	MEETS TOP	SPECIFICA	TIONS

STOCK NO.	USE	TOSHIBA HITACHI	NEC	NET
5P-151	Conv	2852 HJ23	ST37D	1.39
5P-152	1st IF	2849 HJ22	ST28C	1.39
5P-153	2nd IF	2845 0	*	1.39
5P 154	Driver	2844 HJ15	ST303	1.39
5P-155†	Output	2856 HJ17	ST342	1.19

1-t IF, Use SP-132. ased in Posh-Pull output. R's Types within each use category completely in able. HITACHI 2N213. 2N217. 2N218 and 2N211 to of HITACHI 4N13. HJ17. HJ22 and HJ23 re



#### NEW! MULTI-PURPOSE ELECTRIC SERVO MECHANISM

- POWERFUL, MOTOR DRIVEN R/C ACTUATOR
- POSITIVE, INSTANTANEOUS ACTION
- . FOR MODEL BOATS AND CARS

Lafayette's new, matar driven, remate cantral serva-mechanism. Imported by Lafayette to sell tor half the price of any camparable unit! Carefully constructed for power, durability and rugged use. Operates with any single channel, remate control receiver and transmitter. When operated at the prescribed 3 volts, the action is accurate and rapid. Provides for selective steering and automatic return to neutral. Extremely efficient when used with model boots or land vehicles. Hobbyists will find uses for the serva-mechanism restricted only by their imagination. Single pulse aperation electronic neutralization. Measures only 2½° x 2° x 1¾° overall. Includes instructions and linkage to extend actuator arm. Shpg. wt., 8 azs.

A sturdy 2 arm self-neutralizing escapement. Campletely wired (not a kit). Converts electrical impulses from remote control receiver to mechanical motion for varying movement of plane, boot, or car. Four 90° rotations—two by armature activation, two by neutralization. Has ratchet governor for maintaining foolproaf rotating speed. Weighs only 7/8 az. Size: 1-3/8″ L x 2″ W overall. Shpg. wt., 5 az.



4.95



### REMOTE ENGINE CONTROL ESCAPEMENT tafayette's exciting new air-bleed self-neutralizing remote engine control. Varies engine speed of your model. Neutral position of one arm is law speed; neutral position of 2r arm is high speed, and maintained activated position of either arm (armature activates stops motor. Perfect mate for Lafayette F-256. Compact and weighs only 3/4 oz. R quires 1-1/2 volt battery. Low current drain. Size: 1-5/8" x 1" x 3/4". Shop, wt., 5 or 1-5/8" x 1" x 3/4".

COMPOUND REMOTE CONTROL ESCAPEMENT LAFAYETTE'S AMAZING VALUE IN A 4-ARM SELF-NEUTRALIZING
 COMPOUND ESCAPEMENT! . NO NEED TO WORRY ABOUT LOSING YOUR MODEL!

You have no sequence of operation to worry about! Simple as A B CI One pulse always gives right turn; two pulses always gives left turn. Three pulses closes the circuit for the supplementary control such as motor (F-257) or elevator, if used. The rudder always returns to neutral position after any turn as soon as transmitter keying button is released. With ratchet governor for foolproof operation. Sturdy construction—law current drain. Uses 1-1/2 volt battery. Weighs 1-1/8 oz. Size: 2-7/8" L x 1-9/16" averall. Shpg. wt.,



#### **NEW! COMPLETE TRANSISTOR BROADCAST** RECEIVER COIL KIT

MINIATURE 2-GANG POLY-VARI-CON TUNING CONDENSER ● 3-455KC IF'S ● OSCILLATOR ● FERRITE LOOP ANTENNA MATCHED MICRO-MINIATURE COILS

A complete set of matched micro-miniature coils for use in subminiature transistorized radio receiver circuits. Shielded IF and Oscillator coils measure only 7/16" high above chassis and are ¾" in diameter! Correct impedances are provided for maximum gain in transistor circuits; high "Q" coil design and impregnation for maximum stability make these units hard to beat at any price!

The oscillator coil has an inductance of 261 µh, variable ± 20% by means of a tuning slug. The 1st IF cail (converter autput) primary impedance 15,000 ohms; secondary 350 ohms; center frequency 455KC. The 2nd IF (interstage) the same but secondary 500 ohms. The 3rd IF (detector) also the same except secondary 5,000 ohms. The ferrite loop antenno is flat type, 2¾" lang x 9/16"w x ¼" thick. Includes famous Poly-Vari-Can 2-gang tuning condenser. Shpg. wt. of kit is 1 lb.

MS-450

#### 3.95 SUBMINIATURE TRANSISTOR RECEIVER COIL KIT

CITIZENS BAND 27 MC (11 Meter) **GROUND PLANE QUALITY ANTENNAS** 

SPECIAL QUALITY ECONOMY

**BASE STATION** GROUND

A non-directional ground plane antenna that fits 11/4" OD most tubing. Removable vertical and radials are chrame plated brass telescoping tubing. Cadmium plated steel mounting bracket and "U" bolt hardware. Base accepts P1-259 cannectar, Shpg. wt., 4 lbs.

HE-670WX Net 15.95

#### DELUXE BASE STATION GROUND PLANE ANTENNA

DELUXE BASE STATION GROUND PLANE ANTENNA Same as above except vertical and radials are 108" solid, 

#### 27 MC CITIZEN BAND REAR BUMPER ANTENNA

. MOUNTS TO REAR BUMPER IN A JIFFY
THE MOST PRACTICAL CITIZEN BAND MOBILE

ANTENNA AT AMAZINGLY LOW PRICE OF

17.25

Consists of:

Cadmium plated allay steel link bumper mount easily ad-justable to fit on any width

Prafessional special allay spring that is designed and tested far 100° maximum de-flection.

3. 102" tapered stainless steel whip with removable plated steel adaptar.

4. 15' of RG-58/U cable with PL-259 connector on one end and older lugs an ather.

5. Whip gutter clip.

COMPLETE — NOTHING ELSE
REQUIRED! Shpg. wt., 7 lbs. Ex-



#### NEW! LAFAYETTE 27.255 MC CITIZEN BAND REMOTE CONTROL TRANSMITTER KIT KT-127

- WAY OVER I MILE LINE OF SIGHT TRANSMISSION !
- SUPER STABILITY FOR FOOLPROOF CONTROL OF MODEL PLANES, BOATS AND CARS.

Once again Lafayette spurts into the lead with its new amazing RC CITIZENS BAND TRANSMITTER. You'll marvel at the neatness and simplicity of its layout and at the dependability of its crystal cantralled circuit. Fits comfartably in the palm of your hand—yet is so stable that it is unaffected by hand capacitance ar motion. Has new attractive wide-scale meter for visually tuning transmitter far optimum faalpraaf performance. Has, wide, nan-critical tuning. Uses one B & W prewaund cail—na tediacus winding of cails! Tuning far maximum autput and antenna loading adjustment easily performed fram exterior of cabinet. Camplete with appraved telescoping antenna, meter, cabinet, chassis, tube, crystal, alignment taal, all parts and easy step-by-step instructions. FCC forms for exam-free permit enclosed with kit. Size 10" x 4" x 2½". Shpg. wt., 5 lbs.

- KT-127, Less Batteries.... I BA-157 Burgess No. 2 (RCA VS036)
  Battery Net .13
- 2 BA-133 Burgess P45 (RCA V5218) Battery @ 2.17 ...... Net 4.34

### DYNAMIC EARPHONES FOR TRANSISTOR AND SUBMINIATURE RECEIVERS FOR SILENT RADIO AND TV LISTENING.



As Low

MS-591 6 ohm impedance with subminiature phone plug and matching phone jack Net .79
MS-368 3000 ohm impedance with subminiature phone plug and matching phone jack Net .79
NS-368 3000 ohm impedance with subminiature phone plug and matching phone jack Net 1.05

#### COPPER CLAD LAMINATE AT LAFAYETTE'S LOW PRICES!

rinest quality XXXP bakelite base, copper clad baards

TOT PITTIE	Tiredii work.	
NO.	DESCRIPTION	NET
MS-510	XXXP Capper Lam.—1 side—9"x12".	1.50
M5-511	XXXP Copper Lam.—1 side—6"x41/2"	45
M5-512	XXXP Copper Lam1 side-3"x41/2"	,30
M5-513	XXXP Copper Lam.—1 side—2"x41/2"	25
M5-514	XXXP Copper Lam.—1 side—3"x21/4"	
M5-515	XXXP Copper Lam.—2 sides—9"x12"	1.95
MS-516	XXXP Capper Lam2 sides-6"x41/1"	60
MS-517	XXXP Copper Lam.—2 sides—3"x41/2"	.40
MS-518	XXXP Capper Lam2 sides-2"x41/3"	
MS-519	XXXP Copper Lam 2 sides 3"x2"	.27

#### PLASTIC CASE FOR MINIATURE EQUIPMENT



### NEW! Lafayette Super-Value Sun Battery



Super-Value Sun Battery
QUANTITY LIMITED!
Sensational buy enables Lafayette
to affer this famous selenium
photacell at a small fraction of its
normal pricel Approx. & MA current output at 100 ft. candles with
55 ohms load! .5 valts apen circuit
valtage in av. sunlight. 30 MW power output
of 100 ft. candles with 1000 ahm load! Truly
a super buy far the experimenter, kit builder,
etc. With colored pigtail leads. 1½" diam.
MS-543

#### **ANOTHER LAFAYETTE SCOOP!** A TERRIFIC BUY FOR THE 24-50MC

MOBILE AMATEUR AND FOR THE 27 MC (11 METER) CITIZEN BANDER. COMPLETE — ALL IN ONE —

• PROFESSIONAL-SIZE ALUMINUM

SMINET SMINET BYZE

PLUS
• SPECIALLY STYLED CADMIUM
PLATED SPRING PLUS

96" STAINLESS STEEL WNIP WITH REMOVABLE PLATED STEEL ADAPTOR

Regularly Priced at 14:95

ALL THREE YOUR PRICE 8.55

Swivel ball mount base designed to be mounted on any surface. Spring holds rod in properly adjusted pasition and prevents rod damage from shacks and blaws. Stainless steel whip made of special allay for maximum resitiency and strength. Shpg. wt., 5 lbs.

SP-156WX Net 8.55





## DAKIT & SAVE! THEY'RE FUN, TOO!

Available On Easy Pay Plan ... As Low As 2.00 Down



#### INDOOR TV ANTENNA WITH TRUE "VIDEO FIDELITY"

- Slender Line Styling With Foldaway Elements Slide Rule Tuning Transformer Coupling Power Packed Performance

.Net 2.79 AT -14.95





NEW! 6 TRANSISTOR SUPERHET RECEIVER with LATEST NPN-PNP TRANSISTORS

- GE 2N188A AUDIO OUTPUT TRANSISTORS
   100% SUBMINIATURE PARTS —
- NO COMPROMISES!
- LABORATORY DESIGNED -SENSITIVE, SELECTIVE, STABLE!
- CLASS B PUSH-PULL AMPLIFICATION-PLENTY OF POWER.
- FOR GROUP AND PRIVATE LISTENING
  NEW 28 PAGE INSTRUCTION MANUAL

Superb Performance! Incomparable Value!

**6.50** 

LESS BATTERY Transistor-wise Lafayette proudly presents its newly revised 6 Transistor Superhet Receiver Kit KT This improved model uses the lotest GE NPN-PNP Transistors in an ingeniously engineered, lattested circuit providing superb performance and an amazing superior commercial quality. The features o specially mothed set of 3 if transformers, Oscillator Coil, High QLoop, Class B PL Audio Amplification and optimum Transformer Coupling in audio and autput stages, Hos efficients speaker for exemplary reproduction and earphone jack for private listening. Complete with all transistors, pro-punched chassis, but less battery and leather case. New 28 page easy-to-follow sistep instruction book. Size 6 x 31/2 x 11/2. Shaps. wt., 3 lbs.

KT-119A — Complete Kit-Less Case and Battery.

BA-180 Battery 9 V Burgess 2N6. Sturdy attractive brown leather case with carrying strafor KT-119A. 6 x 3½ x 1½". MS-591 — Sensitive matching earphone

#### 3 SPEAKER SELECTOR SWITCH



Convenient rotary switch permits selection of any speaker or combination of 2 or 3 speakers from a remote location. Attractively finished in gold metal with black and ivory rotary switch. Dimensions are 3½" x 4½" x 2½". Shpg. wt.1 lb. MS-567

#### THE NEW GENIAC **FASCINATING** ELECTRIC BRAIN KIT



COMPUTES, REASONS, PLAYS GAMES
COMPOSES MUSIC FORECASTS WEATHER
DESIGN YOUR OWN COMPUTERS
OVER 400 PARTS & COMPONENTS

QUICK TALK KIT

A twa-station intercam kit. Master has volume control with on-off switch, separate "talk-listen" switch; controls both sides of a conversation and can listen in an the Remate station at will. Remate is live when Master power is an, for baby-sitting, dictation or safety listening. No switch an Remate-used need not be near station. Extra Remate station can be added. Far 117 V. D.C., or 50-60 cycle AC. Less connecting cable. Shpg. wt., 6 lbs. Size each units 8½" x 4½" x 3¾".

KQL Extra Remote kit for above. Shpg. wt., 21/2 lbs. Net 4.65

SEMI AUTOMATIC PHONO PICKUP ARM with Dual Styli & Hi-Fi Turnover Cartridge



ORIGINALLY 5.95 Now 2.95

PS-86 DIAMOND STEREO LP ..

#### TRANSISTORIZED CODE PRACTICE OSCILLATOR KIT



n ideal Cade Prectice Uscillator for group and classroom code actice, as well as for those who prefer loudspeaker to earphone tening. This attractive unit incorporates a well designed transor audio circuit with a varioble control for varying the signal ne. You choose the pitch which is most pleasing to you. Innicusly designed on a neat pre-punched metal chassis to fit ound the magnet of an extra efficient speaker. All the comments (except the key) are housed in a 3-1/16" x 2½" x 1½" ractive marcon colored sound box acoustically designed for perior speaker performance. You'll be delighted with the tone of volume of the signal. Complete with all parts, transistar, saker, case, and simple step-by-step; less bottery. Size: 1/16" x 2½" x 1½". Shag. wt., 1 lb.

Net 6.95 

#### 5-WATT PUSH-PULL AC-DC HI-FI AMPLIFIER KIT



SEPARATE VOLUME, BASS AND TREBLE CONTROLS
 PUSH-PULL AUDIO OUTPUT STAGE
 INVERSE FEEDBACK

CIRCUIT

AC OR DC OPERATION

10.95

Here in kit form is an AC-DC hi-fi amplifier that presents unusual features despite its amozingly low price. The separate bass and treble controls permit adjustment of both low and high frequency response and balance. Works equally well with both crystal or ceramic controloges, Hos a 4-tube line up—a 12AX7 amplifier and phase inverter, a 35W4 rectifier and a pair of 35C5's in push-pull, having a power-packed low distortion autput. The circuit utilizes an inverse feedback loop to reduce the level of hum and distortion. Kit is complete containing all essential parts, tubes and detailed instruction manual showing pictorial and schematic diagrams. Shpg. wt., 4 lbs.

Net 10.95



MINIATURE-PORTABLE

SELF CONTAINED BATTERY POWER SUPPLY

• PRODUCES CLEAR, CRISP, CW NOTE

CODE PRACTICE OSCILLATOR WITH KEY

2.29

LAFAYETTE 10-IN-1 LAB KIT • EDUCATIONAL • PRACTICAL

You Build:

2. PHONO-MICROPHONE AMPLIFIER 3. PHONO OSCILLATOR

4. BROADCAST STATION

5. CODE PRACTICE OSCILLATOR 6. SIGNAL TRACER

CAPACITY OPERATED RELAY

ELECTRONIC TIMER

9. ELECTRONIC SWITCH

10. PHOTOCELL RELAY 12.95

Here is a new laboratory tested experimenters kit designed to provide maximum instruction and entertainment and which is ideal for both the beginner and odvanced experimenter. Features practical and interesting circuits which enable you to do many novel and interesting things while learning how these circuits function. You can broadcast your voice or play a phonograph through your radio from anywhere in the house, send code through a headphone or radio, or use light or body capacitance to activate electrical circuits. Safe, low.voltage is utilized. Kit is complete with perforated mounting board, 3 vacuum tubes, microphone and all parts necessary for centruction. A detailed 12 page instruction manual contains simple-to-follow pictorial and schematic diagrams for each project. Less headphone, photoelectric cell and secket, wire and selder. Shop, wt., 5 lbs.

PHOTOELECTRIC CELL TYPE 848. AMPHENOL 77MIP4 SOCKET FOR ABOVE... ME-33 CANNON AM-15-1 1000 OHM SINGLE HEADPHONE...

#### AC-DC BROADCAST RADIO SET KIT

COMPLETE WITH TUBES AND CABINET • 16 PAGE INSTRUCTION BOOK PLUS 3D COLOR EYE-O-GRAMS

Not just ordinary schematic and pictorial diagrams, but a new simple method that makes building a cinch. 3 different colored transparent sheets show the wiring for each circuit; each of these fit over a moster chasis photograph. A moster copy shows all 3 steps in individual colors—and when you're through you'll have a fine superhet set covering 550 to 1600 KC, in modern brown plastic cobinet with built-in antenno. Size 9x5x5. Complete Kit with 5 tubes, cobinet, speaker, and all parts. Shpg. wt., 7 lbs.



4 TRANSISTOR TELEPHONE PICK-UP AMPLIFIER KIT

. FOR FAMILY AND BUSINESS GROUP LISTENING

. HI-GAIN AMPLIFIER FOR PHONO MIKE



KT-131 Complete Kit Less Battery & Pickup Coil ... BA-180 Battery 9 v. Burg. 2N6 or eq. wt., 5 oz. ... MS-16 Telephone Pickup Coil Shpg. wt., 4 oz...

Net 1.30 Net 1.95

NEW! "SUNFLEX" 2 TRANSISTOR REFLEX RADIO RECEIVER KIT



 FOR SOLAR OR FLASHLIGHT BATTERY OPERATION
 NPN-PNP COMPLIMENTARY SYMMETRY CIRCUIT SUPER-REFLEXED FOR 3 TRANSISTOR PERFORMANCE

SUPER-REFLEXED FOR 3 TRANSISTOR PERFORMANCE

• BUILT-IN "MI-Q" FERRITE ANTENNA
An efficient and economical miniature receiver kit for earphone operation.
Uses one NPN transistor one PNP transistor and a crystal diade in an innenious reflexed complimentary symmetry circuit for 3 transistor performance. Gives surprisingly good reception of local stations in most locations without external antenna or ground connections. Antenna plug-in lead supplied for reception of distant stations. Current drain is less than 1 milliamy plug of the performance in sunlight or under artificial light with use of amazing new silicon salar battery (not supplied). Ideal for the beach, ball games and other auddoor uses as well as for indoors. Complete with all parts, transistors, diade, perforated chassis, two-tone plostic case, wire, solder and easy to follow instructions. Size 43/4" x 3-5/8" x 1-5/8". Shpg. wt., 1 lb. KT-132—KiT (less earphone)
MS-260 — Super power dynamic earphon? Shpg. wt., 3 az. Net 3.95
MS-260 — Super power dynamic earphon? Shpg. wt., 3 az. Net 3.95
MS-250 — Benlight cells (2) wt., eo. 1 az. Net 3.95
Net 2-155
Penlight cells (2) wt., eo. 1 az. Net 3.95
Net 2-155
Penlight cells (2) wt., eo. 1 az. Net 3.95
Net 2-150
Net 2

MIGHTY SUBMINIATURE "HELIODYNE" SOLAR SILICON BATTERY

LATEST, MOST EFFICIENT TYPE OF SUN BATTERY

USED BY ARMED SERVICES TO POWER
ELECTRONIC EQUIPMENT



The most efficient type of solar battery yet developed to generate electrical energy from sunlight or from light rays from other sources. Roted 3.2 volts at 2 milliamps, Ideal for operating Lafayette "Sunflex" Rodio Receiver Kit or any other receiver drowing up to 2 mo at 3 volts, 1-1 /16" L x 3 /32" W. Shog, wt., 2 az.

MS-420-"HELIODYNE" SILICON SOLAR BATTERY ...... Not 7.75



# AFAYETTE Unbeatable P.A. Equipment Prices!

ALL LAFAYETTE AMPLIFIERS ARE GUARANTEED FOR ONE FULL YEAR





30 WATT PA AMPLIFIER ONLY

LAFAYETTE MODEL PA-62 • 30-WATT P.A. AMPLIFIER

TEATURES: Ideal for use in churches, schools, small theaters, lecture halls and industrial plants. Priced extremely low to give extro profits to rentals and soles. Separate bass and treble tone controls, permits adjustments to meel all acoustic requirements. Two mike inputs; optional 4-speed phano top. 70 volt constant voltage autput top. Provides coverage up to 100,000 square feet when used with trumpet type speakers, Chassis is equipped with 2-speaker plug-in autput sockets. Unit is housed in sturdy steel, well-ventilated tobinet. Modern streamlined styling. Finished in boked hammerloid enamel. Removable escutcheon plate far rock and panel mounting.

\*\*PECIFICATIONS: TUBES: 3-12AX7. 2-616GB:

rock and ponel mounting.

SPECIFICATIONS: TUBES: 3-12AX7, 2-6L6GB; speeds—163/9, 33/9, 45 and 78 r speed motor, with turnover carts peed motor, with turnover carts peed motor, with turnover carts was precious metal needles. Hos on the peed motor is precious metal needles. Hos on the precious metal needles needles

cps; Ireble ± 15 db of 10,000 cps. HUM LEYEL: 70 db below roted output. INPUTS: 3; 2-Microphone and 1-Phono. CONTROLS: 6; Microphone-1, Microphone-2, on-off, Bass, Treble, Phono. OUTPUT IMPEDANCES: 4 8, 16, and 250 ahms: /0 volts. POWER CONSUMPTION: 135 Worts, 110/120 V.A.C. 50-60 cycles. SIZE: 14" w x 8" d x 6" h. SHIPPING WEIGHT: 20 lbs.

Tubes 2.00 Down
4-SPEED PHONO TOP

For obove amplifier. Fits in place of cover. Plays all speeds—16½, 33½, 45 and 78 rpm. Has constant 4-speed motor, with turnover cartridge, complete with two precious metal needles. Has arm-rest and plug connection; for 110 Volt 60 cycle. Shpg. wt., 10 lbs.



Broadcaster • IDEAL FOR OUTDOOR

Sound

HAMFESTS EFFICIENT HORN
PROJECTS SOUND 1000 FT.

MICROPHONE DETACHABLE

18 WATT

PA AMPLIFIER


ON 3 FT. CORD

SHOULDER STRAP FOR EASE OF USE

A transistorized power megaphone with many unusual features and many applications. Basically a highly efficient sound projector harn with a built-in microphone copoble of amplifying and projecting the voice with a range of 1000 feet. The microphone is a telephone-type etement, easily replaceable, and may be detached and extended up to 3 feet from the harn. The reflex-type harn is extremely light weight, of sturdy spun aluminum construction with a strap for carrying or placing on the shoulder. A press-to-talk switch on the handle provides



**PAGING SPEAKER** 90°



**COMPLETE SYSTEM** 

10-WATT

FIXED P.A.

SYSTEMS

COMPLETE PERMANENT SYSTEM

CHOICE OF CRYSTAL OR DYNAMIC MIKE AMPLIFIER HAS LAFAYETTE'S MONEY-BACK GUARANTEE

High quality, low cost system engineered for smaller permanent installations. For areas up to 5500 sq. ft. For affice, store, gorage, small factory paging and music systems. THE COMPLETE SYSTEMS INCLUDE: The new Lofayette Model PA-60 10-watt amplifier complete; your choice of either the Electro-Voice 727 crystol microphone complete with detachable desk stand and 5' cable — or the new Lofayette Model PA-29 weatherproof, blast-proof slim dynamic mike complete with high or low impedance selector switch and detachable swivel-type stand adoptor; 8" heavy duty PM speaker; 35" speaker cable and plug; and attractive polished walnut speaker wall baffle. For 110-120 volts, 60 cps AC operation. Shap. wt., 25 lbs.



LAFAYETTE MODEL PA-61 • 18-WATT P.A. AMPLIFIER

hommerlaid enamel.

SPECIFICATIONS: TUBES: 2-12AX7, 2-6V6GT; 6AX5GT (Rectifier). INPUT GAIN: Micraphane 120 db 3 3 Meg., Phana 80 db ½ Meg. FREQUENCY RESPONSE: ± 2 db fram 30-15,000 cps. TONE CONTROLS: Bass ± 15 db at 50 cps; Treble ± 15 db at 10,000 cps. POWER OUTPUT: 18 Watts. INPUTS: 2, 1-Microphane and 1-Phana. OUTPUT IMPEDANCES: 4, 8, and 16 ahms; 17 volts (333 ohms). HUM LEVEL: -70 db below rated autput CONTROLS: 5; Microphane, an-off, Rass, Treble, Phana. POWER CONSUMPTION: 75 watts, 110/120 V.A.C., 60 cycles. SIZE: 14" w x 8" d x 6" h SHIPPING WEIGHT: 19 lbs.

LAFAYETTE MODEL PA-61 WX -Camplete with Tubes 2.00 Down Net 37.50

4-SPEED PHONO TOP

Far above amplifier. Fits in place of caver. Plays all speeds-78, 45, 33½ and 16½ RPM. Has canstant 4-speed mator, with turnover cartridge, complete with two precious metal needles. Has arm-rest and plug connection; for 117 valts, 60 cycle. Shpg. wt., 10 lbs.

PA-65 W -4-Speed Phana Top Net 16.95

LAFAYETTE'S 25-WATT DRIVER UNIT

**Fits All Trumpets And Projectors** 

18:00 Value

Hermetically sealed weather proof driver unit.

Delivers 25 wotts of power. Perfect for any location where high valume with law distortion is desired. The PA-57 will fit any trumpet or projector of your choice without modification. The wide-ronge frequency response of 120-7.100 cps assures excellent reproduction of music and speech. 16 Ohm independence matches all amplifiers. Size 4" Diameter, 3-5/6" depth. Shaps, wt., 3% lbs.



LAFAYETTE PA VALUES SPECIAL 12" & 8" P. A. SPEAKERS

■ 12" FULL 15 WATTS OF POWER ● 8" FULL 13 WATTS OF

HEAVY ALNICO 5 MAGNETS

MEAVY ALNICO 5 MAGNETS

12" MODEL — Fine quality throughout, these speakers were designed especially for public address work. Will handle 15 watts of power—making them ideal for use singly for medium power systems or in multiples for higher power. Rugged mechanical construction, dust-proofed and rust-resistant. Have 4,64 ac. Alnico 5 magnet, 8 ohm voice coil. Shpp. wt., 5 lbs.

SK-118

MODEL

SK-118 Net 4.95
8" MODEL — Ideal for larger scale, lower power pagingsystems. Same quality as 12" speaker above, but 8" diameter, rated at 10 watts, with 3.16 az. Alnica 5 magnet.
8 ohm voice cail. Shpg. wt., 3 lbs.
SK-119

12" PM SPEAKER
"BEST BUY" FOR HIGH FIDELITY MUSIC AND
PUBLIC ADDRESS USE

30-WATT PORTABLE SYSTEMS **DUAL-SPEAKER** 



COMPLETE SYSTEM



• CHOICE OF DELUXE DYNAMIC MIKES


• TWO GE 25-WATT SPEAKERS • MONEY-BACK GUARANTEE

TWO GE 25-WATT SPEAKERS • MONEY-BACK GUARANTEE
The 30-wott system is one of our most popular models. Large enough for the
majority of sound system applications — used in thousands of school auditariums,
churches, theories, dance holls, dance studios and lecture holls. The Ideal system
for rentals; these systems have been sold to many hundreds of dealers.

AND REMEMBER OUR MONEY-BACK GUARANTEE AND OUR LOW, LOW
PRICEI DUAL SPEAKER 30-WATT PORTABLE SYSTEMS INCLUDE: The our
standing feature-filled Lafayette Model PA-62 30-watt amplifier; 2—GE 25-watt
PM speakers; 2—35' speaker cables and plugs; your choice of the popular
Argonne AR-3 All-Purpose Dynamic dual-impedance micraphane for hand-held,
desk stand or floor stand use, with removable boll-joint desk stand and floor stand
adapter and 8' cable; or the deluxe dual-impedance Electro-Voice 664 Cardiaid
dynamic far close-talking use where high-feedback problems exist, with 40-15,000
cps response, on-off switch and 18' cable; the famous Atlas MS-10C floor mike
stand; and the handsomely designed split-type pertable carrying case covered in
high quality dark blue leatherette. Size of case 22½'h x 16½''w x 15"d — provides a secure place for the system components. For 110-130 volts, 60 cps AC
opperation. Shape, wt., 75 lbs. less phona; with phono 85 lbs.

LAF PA-142 WX 30-watt Portable System, Less Phono Top and less MS-10C floor
stand, complete as described with Argonne AR-3 dynamic mike .....Net 105.00
LAF PA-143 WX Same as PA-142 with 4-speed phono top ......Net 124.50
LAF PA-144 WX Same as PA-142 with 4-speed phono top .......Net 124.50
LAF PA-144 WX Same as PA-142 with 4-speed phono top ......Net 140.50

MODERN SPEAKER BAFFLES





#### VOLUME CONTROL



# afayette 3 39th Annual Christmas Tool Sale **Breaking Records for Savings**



#### ATTACHMENT FOR ELECTRIC DRILLS

DRILL WHEREVER YOU WILL

1/a" SIZE DRILLS

### WEN ELECTRIC POWER SAW KIT



ODEL 571. SAW TABLE for the 505 saw, complete with blades, jointer, protractor, rip fence, and circle cutter. x 15 x 7 1/5" steel. Shpg. wt., 12 lbs.





Five most often needed round hole punches. Do the jab in minutes — save hours of tedious hand labor. Cuts smaoth accurate holes for sockets — plugs — contrals — panel lights — switches — terminals — most rodio parts. — Works equally well with sheet metal — sheet plastics — camposition board etc. Drive with any wrench — or with I handle included. Punch sizes included are ½", ½", ½", ¾", ¾", I" and 1½". Supplied camplete with punches, dies, I drive hondle, tapered reomer, filted woaden case and instructions. Shaps. wt., 2½ lbs. HD-471...... Net eo., 5.49, Net eo., in lots of 3.....4.94

#### **NEW! SQUARE PUNCH SET**



metal — bakelite — plastic — composition plete with  $V_2$ ",  $S_6$ ",  $V_7$ " punches — dies — drive handle and wooden case. Shpg. wt., 2 lbs. Net 6.95

#### NEW BYI TOTE SAW



- SAWS WOOD, STEEL, PLASTICS
- 2-SPEED MOTOR
- 100 sq. in. WORK TABLE
- 23.30

y motor housed in rygged cost oluminum and ng. Adjustable blode guord protects operator, ive chain drive and easy tension adjustment, ugh to be completely portable. Operates on cycle AC. Shpg. wt., 17 lbs.

### Vinyl Insulated "PROFESSIONAL" Pliers



Tested Beyond Professional Specifications

Professional quality—heavy duty—farged from special heat treated, alloy steel. Chrome plated to resist rust. Insulated with fitted, vinyl, non-slit handle grips—protects up to 10,000 volts. Hand hande cutting edges. Machine milled teeth. Handles shaped for easy grip and maximum leverage. Short fulcrum distance for greater gripping power. Uncanditionally guaranteed by Lafoyette. Average Shap, wt., 10 as.

10-351 6" Diagonal cutter-wire stripper
10-351 6" Long nose-side cutter-wire stripper
10-353 6" Electronic oblique cutter-wire stripper
10-353 6" Long choin nose-side cutter-gripper
10-353 6" Long choin side cutter-beveled nose

### 7 in 1 HOLE SAW

Fits any electric drill, drill press, motor orbor, rotary sander or lathe. Cyclindrical saw blades cut holes from 1" to 2%" diameter in any %" stock. Hole sizes are 1", 1%", 1%", 1%", 2", 2%", 2%", 2%". True size carbon steel saw deep machined grooves in taol head and place by a full length tock screw. Cuts metols, sheet-rock, wall-board, mosanite, os guide bit and automatic slug ejector. ½ lbs.



#### "RUBBERGRIP" SCREWDRIVER SET

• 4 Most Needed Screwdrivers
• Rubbergrip for Comfort and Torque

Rubber inloid handles grant maximum comfort and maximum torque. Can't bite into your hands no matter how hard you grip and turn. Extro "Lift" improves balance. Blades are hordened and tempered. Ploted to resist corrosion. Set contains 5" x 3/16 ond 6" x ½ standard drivers plus 3" x 3/16 #1 and 4" x ½ #2 recessed drivers. Shpg. wt., 1 lb.



- POWERFUL
   BLOWER AND
   MOTOR COOLER
- . SURE GRIP

HD-368-List 24.95

ADJUSTABLE DEPTH STOP
 SPRING RETURN TENSION
 ADJUSTABLE CRADLE
 ADJUSTABLE DEPTH
 GAUGE DIAL


10.44

### **NEW! Knicknack CABINET** 18 Drawers-each one 5¾" x 2½" x 1½"

COMPARABLE VALUE 6.98



Set of 13 high quality chrame vanadium twist drills, complete with me'gl index. Sizes: 1/16" to "4" by 64ths. Shpg. wt., 8 oz.
HD-113 ...Net 1.29



#### ROTARY RASP

#### BENCH AND WOODWORK VISES



#### SWIVEL CLAMP-ON VISE (A)

Sturdy, proctical and efficiently constructed. 21/1‡ wide iaws—open to a maximum 21/2". Twin guide rods and precision drive scree assure smooth action—rigid grip. Jawa occurately machined, polished and lacquered. Unexcelled for ordinary jobs in shop, home or garage. Shpg. wt., 31/2 ibs.

NEW BENCH VISE (B)

WOODWORKERS VISE (C)

• 61/2" x 31/2" JAWS
• OPENS TO 41/2"
A fine, practical tool far the small shap-home-form or garage. Guides are of finely machined cald ralled steel. Gray iron lows—fore ground and finished. %" diometer screw—6 thread per inch. Shpg. wt., 6 lbs.

Net 1.99

#### NEW BYI DE LUXE SPRAYER KIT



- . SPRAYS PAINTS. INSECTICIDES, VARNISH
- . EASY TO CLEAN . UNIFORM SPRAY; CLOGPROOF

**19.97** 

This kit prepares you for any and every kind of spraying job indoors or out. Enables you to caver large areas fast—fences, autdaar furniture, sidings, stoors. Can be used as mathproafer, or garden sprayer. The fomous de luxe version of the Burgess Electric Sprayer with genulne sapphire nozzle is the heart of this kit. Sprayer comes with 24 oz. container, 4 oz. ouxiliory container, ongle nozzle adapter, paint stroiner, 15 ft. cord, "How to Paint" booklet, spare parts kit, hand sonder. Complete kit in smartly designed steel carrying case. Shpg. wt., 85/s lbs.

#### "Little Smith" Anvil



"Little Smith" is the perfect companion for the hobbyist-finkerer-model maker-or just plain foolin' arounder. Meosures only 4½" x 2½" x 2½" overall. Rugged enough for heavy paunding-sized right

Full 2.9 amperes

13.95 • Multiple Thrust ball bearings

14" Geared Chuck and Key

# HI-TORQUE

Powerful, cool-running drill for all medium-duty applications. Uses a heavy-duty universal type series wound motor for extra efficient performance. Motor works well on both AC and DC, 110-120 volts, permitting operation almost everywhere. Multiple heavy duty thrust ball bearings are used for smooth running even with large loads. Drill has a no-load speed of 2000 R.P.M., full load speed of 1200 R.P.M., full load speed of 1200 R.P.M. Uses trigger-type on-off switch with locking pin for continuous operation, and outomotic release feature. Vz copocity in hordwood, Vz in steel. Uses on extra rugged geared Jacobs chuck with Vz igw. With 6 foot, 2 conductor UL approved cord. Overall length 9" Shpg. wt., 5 lbs.

HD-365, List 23.50 .....

#### SCREW-MATIC



Can be fitted to any fixed or portable drill, to drive up to 'm' diameter wand screws quickly "non-slip" industrial-type clutch disengoges itself when screw is driven home. Special bit holder prevents bit from slipping out of screw slot, includes two horders when steel 'm' hex bits for No. 2 Phillips head and for No. A

#### Ratchet Head SOCKETOOL



Amozingly versatitel Handles carriage bolts, machine bolts, log screws, sheet metal screws, machine screws, wood screws, coperates in stroight or offset ted, recessed, square or hex. Operates in stroight or offset ted, recessed, square or hex. Operates in stroight or offset position—handy for hard-to-reach ploces. Universal ratched head works right, left or locks—speeds and simplifies any job! Contains Shelton suregrip ratchet hondle; straight hex odapter; offset hex odapter; 5 hex sockets—7/16", %", 5/16"; tool steel screwdriver bit for stotled screws; tool steel screwdriver bit for recessed head (Phillips) screws. A fine small tool set, ruggedly constructed for hard usage. Complete in duroble plostic case. Shps. wt., 1 lb.

### 20 PC. AUTO SOCKET SET



#### 20-PIECE TAP AND DIE SET . NATIONAL COARSE SIZES



#### RAM "88" 7" POWER SAW



. 11/4" HP MOTOR

• 8 AMPS • 4500 RPM

FREE SPEED

CUTS 216" DEEP

COMBINATION BLADE for up or crosscut work, HD-361 Shpg. wt., 1 1/2:1bs......Net 1.69 FLOORING CUT-OFF BLADE for smoother crosscut than

BUY ON LAFAYETTE'S NEW EASY TERMS - SEE PAGE 44

# for HOME or SHOP



• COMPLETELY PORTABLE

NOT A FLIMSY "VIBRATOR"

FOR ALL PAINT SPRAYING DUTIES

HD-415-List 39.95...

MULTI-COLOR KITS: For best results in spraying multi-color paints, lacquers, enamels. Simple, quick-change, nazzle. Designed specifically for modern multi-color points. Shpg. wt., 4 az.

Net 2.10

AIR TOOLS KIT: For inflation and dusting, includes chuck for all tires—attachment for footballs, valleyballs, basketballs, etc. Rubber tays, pools, air mattresses. Plus "dusting" attachment. Shpg. wt., 4 az.

Net 1.70

THOR SPEEDWAY "20" 1/4" DRILL

Husky—Low cost 1/4" geared chuck drill roted at a full 2.5 amps. Preferred and used by professional mechanics for mony years. Built far continuous production on wood or metal. Powerful, UL appraved, universal motor. 1/4" capacity in steel, 1/4" in hordwood. Ball and self lubricating branze bearings throughout. No load speed 2400 RPM. Strong, lightweight, cost aluminum allay housing. Specially designed gear chain for greatest torque. Locking Trigger switch. Backed by Lafayette's famous Maney Bock Guarantee. Shpg. wt., 5½ lbs.
THOR SPEEDWAY "20"—List 18.95 Net 11.33



WITH YANKEE STYLE BIT HOLDER TURNS 1/4" DRILL INTO HIGH POWER

TOOL REVERSES—INCREASES POWER—

REVERSES—INCREASES POWER—
REDUCES SPEED
on to one speed reduction develops tremendous usel Hond clutch control for easy, instant stop-stert on Look at these fobulaus features! Power screw er—kondles largest screws—reverses to extract them it of the power for drill tapoing headt Plenty of power for eversize line! Feffect for concrete or any kind of masanry line! Low speed and high power for hole saw attachists. A professional loot that anyone can use! Cames talete with screwdriver bit—Phillips bit—Vy socket adapter-wrench pin and Instruction book, Shps. wt., bt.

5 lbs. HD-195 ......Ner 11.25



THOR-SPEEDWAY SPEEDSAW

RATED 3.1 AMPS 3400 STROKES PER MIN NEW! • 3400 STROKE

16.63

The most exciting tool on the market today! It replaces the handsaw far all types of sawing and takes all the hard work aut of the job. Will cut wood, metal, camposition; cuts straight and true and will cut bevel angles -10.45° either side of the cutting line. Baing a small blade, the sow can cut curves, circles, scrolls easily, even on 2 x 4's; and it blaws away the sawdust while cutting. Will cut wood up to 2" thick and steel 1/4" thick. Its motor is meant for a lifetime—has allite bearings. Operates an 110/115V AC-DC: has gn-off position push through slide switch, UL approved. Cames with 2 lig saw blades (wood and metal) and wrench, 6'2" canductor cord. Measures 6'%" L x 6'%" H. Shpg. wt., 5 lbs. THOR SPEEDWAY "17"—List 29.95 Net 16.63 har Jig Saw Table: 15" x 16" 20 gauge steel table. Converts That To stationary saber saw. Metal gauge for 5ff or right hand 45° angles. Jig saw tilts for compound ngles. Rip guide permits 6'%" wide cut from blade to wide. Shpg. wt., 11 lbs.

#### "VILLAGE BLACKSMITH" ANVIL

Here is warkbench equipment lang wanted —a rugged former size anvil. 8" lang, 3½" high and 3" wide as finds hundreds of uses in metal wark, wada atherwark, etc. Exclusively built for the hamen, habbyists and farmers. Shag. wt., 8 lbs. .Net 3.29

(1) eller 8100

SOLDERING GUN

● 100 Watts ● Heats in 5 seconds Prefocused dual spotlights

New soldering gun rated at 100 watts. Features instant heating in 5 seconds. Trigger switch for fast on and afficantrol. Also dual spot lights, pre-focused to assist your salder wark. Tips are long life and easily replaceable.

MODEL 8100—List 5.95 ..............Net 4.35. Lats of 3, Ea., 4.08. Lats of 12, Ea., 3.91



NEW! Weller **Dual Heat Soldering Kit** 

Instant switching to high or low heat.
Saves time — longer tip life. Instant heating clear to the tip. Prefocused spotlight Illuminates work. Guaranteed for one year. Kit includes dual heat, 90-125 watts soldering gun—solder—wire brush—soldering aid. U.L. appraved. 110-120 V. AC anly. Shpg. wt., 3 lbs.
Weller 8200K List 7.95 ....Net 5.83

ADJUSTABLE CURVE



Plane-R-File

Cuts everything — from soft wood to taugh steell It's a planel It's a filet Here in a single tool is a great new way to do all sorts of planing, filing, smoothing. Replaceable blade, double sided for double-life, shapes quickly, easily, gives smoother finish an wood and metal, even cuts steel. Die cast aluminum body—reversible handle. Camplete with non-clogging, reversible, coarse blade. Shpg. wt., 12 azs. HD-637 Net 2.59 Net .73 HD-638 Medium blade, 2 az. Net .73 HD-639 Caarse blade, 2 az. Net .73

NEW! THOR SPEEDWAY "30" 3/8"

HEAVY DUTY


RATED FULL 3.1 AMPS! 3/4" JACOBS GEARED CHUCK

DESIGNED FOR MAINTENANCE AND INSTALLATION.

DRIVES HOLE SAWS UP TO 21/2 INCH

DREMEL JIG-SAW POWERFUL ROTARY MOTOR





1.69

Enables anyone to draw curved designs with ease. The rule is easily bent to any desired curve with the forgers. Once bent, the rule stays curved without being held. White plastic frame encloses a lead bar and a steel sheet support. Overall least in 2214"

#### THOR SPEEDWAY "14"SANDER Here's Our Hot Sander Special



BUFFS-POLISHES-RUBS!

USE SHEET OR FREE (WET) ABRASIVES!

ABRASIVESI

Get this new top quality sonder for all sanding uses. Here's an orbital motion, motor driven finishing sander (na load speed ... 3450 RPM) that sands, smooths, buffs, palishes, or rubs with both sheet abrasives or wet (free) abrasives. Sanding area—41/2" x 51/4". Features all sealed ball bearings; direct-connected air-coaled motor. Rugged blue hammerloid cost aluminum body. Hondy switch prevents accidental starting. UL appraved. Use on 110-120V 60 cycle AC only. Shap. wt., 7 lbs.

Net 16.63 THOR 5-106—18 sheets assorted sandpaper....Net

#### **ADEL Hand "Nibbling" Tool**

Cuts any shape or opening by I
 In sheet steel up to 18 gauge soft metals up to 1/16" thick,

### THOR SPEEDWAY 6.5 Amp. 1/2" DRILL





D) 5" Sanding Disc HD-429 HD-430 HD-431 .87 C) 5/8" x 9" Sheet HD-432 HD-433 HD-434 .95 FILE RASP

#### • FILES TWICE AS FAST!

SANDING DISCS AND SHEETS
Coarse
Fine Grit Med Grit Grit
(150) (80) (60) Net ea.

Works twice as fast as ald foshioned files. Cuts an forward and back strakes. Even sideways or circular mations. Excellent for shaping—natching—finishing—and fast stack plaster, porcelain, etc. Two abrasive surfaces—one side coarse (46) grit—other side medium (80) grit. Resists loading—cleans easily with solvent, hat water or wire brush. HD-673

Net 1.10

(A) Handy-Sander: Hand-sonding lack kit. Contains sanding black, one fine grit sheet, one coarse grit sheet and felt pad. Cleans easily with solvent or wire brush. Shpg. wt., i lb.

HD-319 Net 1.29

Extra sheets for Handy-Sander. Pkg. af 2—1 coarse, 1 fine. https://doi.org/10.1001/10.

HD-445

B) S-In-1 Wheel: Far use with power saws. Shapes—saws —ploughs—runds—dadoes. Cuts and sands in one oper—atian. No bind, drag or kick back. 80 grit an ane side, 36 grit an edge and other side. Never needs sharpening. Shape, wt., 1 ib.

HD-435 6½" Wheel, ½" Arbor with reducer to ¾"
Net 4.10

TUNGSTEN-CARBIDE Lifetime Sanding Accessories

Lifetime Sanding and Cutting Tools
 Miracle Abrasive—harder than steel

Makes sandpaper obsolete

### **ELECTRIC HANDI-SPRAYER**

...Net, ea. 6.25 Lots of 3, ea. 5.97




VERSA-VISE

TURN TO ANY USEFUL AS AN EXTRA

10.49

#### POWER DRILL ACCESSORIES



#101 Stapler Gun 3.99 with 1,000 Staples High Compression Model
 Staplés within 1/16" of cel
 100% Jam Proof

Revolutionary, new staple gun with tremendous, action. Delivers as much driving power as machinized and weight. Highly maneuverable — perfectly extremely lightweight. All case hardened steel Rust proof, bonderized finish. Na ailing required Uses two staples sizes — 4/16" and 5/16" — with cal changes. Shpg. wt., 1/3 lbs.

HD-322 List-\$4.95

HD-323 Pkg 1000 4/16" staples Open Channel Loading

.40

Cordomatic HANDY LITE NEW LOW PRICE




Pertable light and power
 Locks at any length of 20 ft.
 Retracts automatically

Provides light and power up to 20 feet fram installation. Swivels 180° when wall mounted—360° rotation when ceiling mounted. Detaches easily to miniates the inconvenience and hazards of tangled ands. U.L. approved. Shpp. wt., 5 lbs.

CORDOMATIC EXTENSION CABLE. Similar to above, except terminates with a 3-way power top instead of high proved. Shpg. wt., 4½ lbs.

# LAFAYETTE is your HEADQUARTERS for TV ANTENNAS AND ACCESSORIES!

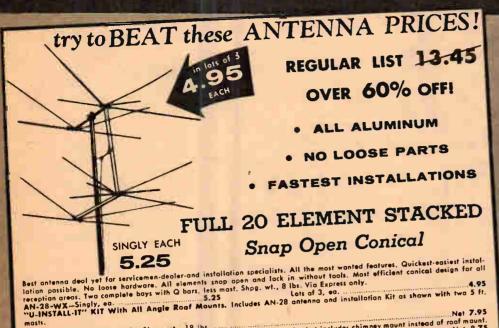

AN-32-WX Via Express only. Shpg. wt., 18 lbs.

"U-INSTALL-IT" KIT With Chimney Mount, Same ontenna and accessories but includes chimney maunt instead af roof mount. Net 8.75

AN-43-WX Via Express only. Shpg. wt., 18 lbs.

FAMOUS BRAND Color 'Tenna PRICE BREAK - Over 50% Off! LIST 29.95 SALE 13.95! **Gold Anodized**  High Gain On All VHF Channels Completely Factory Preossembled Electronic Lens Design Highly Directional — Yagi Performance adaystte is the FIRST to after this nationally tried and proven antenno at cost to 25% off the regular dealer price. This is the same fine antenno— it is exclusive features—that selfs for dollars more than one cord-breaking usive features—that selfs for dollars more than one price. Check these features: Electronic Focusting—High dones and the coverage—anodized quality construction—easiest in—land and the control of the con AN-51 WX- List 29.95 plete Kit of AN-51 ontenna plus AM-12 mtg. kit os shown. SApg. wt., 22 WX...

● ELECTRONIC LEN'S DE-SIGN ● HIGHLY DIRECTION-AL-YAGI ENGINEERED ● COM-PLETELY PREASSEMBLED ● MORE GAIN ON ALL VHF CHANNELS

Famous Brand SUPER Color 'Tenna 20 Elements—Up to 125 miles OVER 50% OFF

ALL CHANNEL'S "RIVIERA" WORLD'S MOST POWERFUL ULTRAFRINGE VHF - UHF - FM ANTENNA

GUARANTEED 200 MILE VHF RECEPTION OR YOUR MONEY BACK

• Receives channel 2-83 from all

Broadband UHF-VHF and FM. motoriess oil direction reception

All aluminum filp-out assembly

Field tests reception on VHF of up to 200 miles has made possible this unprecedented quarantee. Here is an antenna with one transmission line for all UHF, VHF and FM stations in all directions without the use of a rotator. The nine position selector switch connected at the set electronically rotates antenna beam instantly without physically moving the antenna. Gain on channels 2-6 comparable to 4-bay conicals; on channels 7-13 comparable to stacked 10-element single channel yagis; on 14-83 comparable to bow-tie reflector. 16 ½ doweled aluminum elements are 60 inches long. Complete with switch, coupler, 45" stacking bars and 2 7½" angle type mast insulators for Polymicalene line listed below. Shpg. Wt. 10 lbs.

THE RIVIERA MUST BE USED WITH THE LOW LOSS LEAD IN WIRE LISTED BELOW

AN-135WX Less Most

"U-Install-It" kit: Includes Riviera anienna, chimney maunt, two tive fit maits, 100 ft. af Polymicalene 4 canductor lead-in wire, 8 stand aff insulators and complee instructions. Shipping wt., 16 lbs.
AN-42.WX 2.00 Dawn Net 29.95

ALL CHANNEL LEAD-IN WIRE FOR USE WITH RIVIERA ANTENNA Special 4 canductors, matched impedance transmission line. Low loss, mico-filled Palymicolene copperweld conductors.

WR-8 - 50 ft. length .Net 5.00 WR-18 - 100 ft. length .Net 8.90 WR-9 75 ft. length .Net 7.50 ever 100 ft., per 100 ft. .Net 8,90

directions without a rotor

# NEW! SUPER FRINGE AREA ANTENNA THE MAXIMUM ANTENNA FOR YOUR AREA. MAXIMUM CONSTRUCTION. PERFECT 300Ω MATCH ON EACH CHANNEL.

most recent advance in an most recent advance in ana design and construction.
emely high gain and front
ack rota. Phasing relationassures equal gain an ell
channels. Eliminate conel interference. Elements
Souble locked in high ImStyrene plastic insulators.
Matic brackets lock and seall elements. Completely
send belief. Entire antenno snaps open and lacks in.
Dual insula
the standard elements. All aluminum construction. Single bay.

N-38WX 2 8-33.19 2.00 Dawn Net 14.55
It' Kir. Includes AN.37WX and roof mount kit AM-10 with one 5 ft.

th, Includes AN-38 and roof-mount kit with AM-11. Shpg. wt., 32 lbs.
2.00 Down

# TV PICTURE TUBE

**Burns off Picture Tube shorts** Lengthens Picture Tube life





nd PARALLEL CIRCUITS only Renews brightness contrast
MS-12 in lats of 10s each .79~ singly .89

300 OHM TWIN-LEAD

1.39 COPPER CONDUCTORS


per 100 ft. LO-LOSS POLYETHYLENE

High quality, law-lass lead-in for all TV and FM installations. Palyethylene dielectric—standard copper leads. Shpg. wt., 2 lbs. per 100 ft.

UNIVERSAL TV TUBE "BRITENER"

TS-170-in lats of 6

### "U-INSTALL-IT" KITS!





#### TV ANTENNA MASTS

\_\_\_\_ STEEL MASTS. New corrasion-resistant 5 ft. steel most made to fit all ontennos. One end is topered. "Jom Fit" construction with locking key. 1½" O.D. TL-12W S ft. Wt., 2½ lbs. 69 TL-13WX 10 ft. Wt., 4½ lbs. 1.29 TL-14WX 10 ft., 16 gouge. Wt., 8 lbs. 1.89

ALUMINUM MASTS. 18 gauge-heavy wall-high tensile strength. Rust and carrasian praof. Swaged for stacking. TL-66W 5 ft. Wt., 11/3 lbs. 1.20 TL-17WX 10 ft. Wt., 21/3 lbs. 2.30 10 ft. Most shipped via express anly.



ECONOMY MOUNT 99€



ANTENNA
This Galden Anadized aluminum mass will
autlast any antenna. Made af a taugh,
extro strong, drawn aluminum allay. This
.050" wall most is stranger than a 20
gauge steel mast. Permonently eliminates
carrasian problems. Ends are swaged far
"jam-fit" so that twa ar more mosts may
be lelescaped together.
TL-115W 5 ft. Wt. 1½ lbs. Net 1.70
TL-116WX 10 ft. Wt. 2½ lbs. Net 3.26

#### TWO-SET POWER BOOSTER B-24



Boosts Signal to 1 or 2 TV or FM Sets
Low noise broadband circuit:

no tuning needed

Built-in isolation networks: use as

a two-set booster
 Covers both TV AND FM, including

Covers both TV AND FM, including converted UHF channels

Positive improvement in picture and sound quality, even in deep fringe areas. Brighter, sharper pictures, enjoy new channels and new programs in many cases. The B-24 puts new life into adder sets, A B-24 with an indoor antenna will aften autoerform elaborate autdaor antennas. It is a combination of a unique low-noise frame grid amplifier tube with twa exclusive Blander-Tongue circuits, the "straight-thru" and the "cauple-two. The "straight-thru" circuit boosts TV and FM signals up to twa times on a single set. The "cauple-two circuit pravides a vigoraus boast in signal strength (up to 5 db) to law TV, two FM, or a TV and FM set.

SPECIFICATIONS — GAIN. For any control of the straight strength (up to 5 db) to law the strength of the


#### TUNER CLEANER

TWO SET COUPLER




in sets of 3

16.98



### INSTALLATION ACCESSORY KITS



Page 32

All the accessary items necessary to do a quick, easy installation from roof to receiver! You get an all angle roof maunt—lightning arrestar—75 feet of 300 ahm twin lead—6 insulated screw eyes—2 insulated most standaffs and a 5 ft., 11/4 OD steel mast. Shpg. wt., 7 lbs.

AM-10W..ea. 2.95 Lats of 3, ea...2.85 AM-11W with 2—5 ft. musts. Shpg.wt., 10 lbs. Singly, 3.55 Lats af 3, ea. 3.35 AM-12W Same as AM-10 but with chim ney mount. Ea. 3.25 Lots of 3, ea. 3.15 AM-13W Same as AM-11 but with chim ney mount. Ea. 3.85 Lats of 3, ea. 3.75

### **NEW! TV TUBE RESTORER**

LOCATES AND CORRECTS FOR . COMBINATIONS OF ABOVE

ne simple unit pravides the cure to any defective picture tube in any TV set arks an electrostatic or electromagnetic facus picture tubes in series ar ratlel-wired filament TV :ets. Carrects far dozens af picture tube faults.

BUY ON LAFAYETTE'S NEW EASY TERMS — SEE PAGE 44



## MOTOROLA FOREIGN CAR RADIOS SAVE 50%

**CUSTOM DESIGN • TRANSISTOR POWERED** 



TAKE ADVANTAGE OF SAFAYETTE'S ROCK BOTTOM PRICE!

 Perfect For Sports Cars, Boats And Trucks
 Special Transistor Powered Circuit Eliminates Noise And Provides Low Battery Drain. • Extremely Compact — Will Mount In-Dash, Under Dash Or In Specially Positioned Installations • Automatic Volume Control

• Self Contained S" Golden Voice Speaker • Measures 6½" W x 2½" H x 7½" D

#### CONSULT THIS CHART FOR YOUR FOREIGN OR SPORTS CAR

ALFA-ROMEO	DKW	HILLMAN MINX	PEUGEOT	SUNBEAM RAPIER
1956-59	1956-59	1957-58	1958-59*	
ARNOLT BRISTOL	ENGLISH FORD ANGLIA, ESCORT	JAGUAR (ALL)	RENAULT DAUPHINE	TANAUS
1955-59		1950-59	4CY-1955-58*	1959
. AUSTIN	PREFECT, SQUIRE	1957-59	RENAULT DAUPHINE	TRIUMPH (ALL)
1956-59	1958-59		4CY-1959*	1955-59
BMW (ISETTA 300)	ENGLISH FORD CONSUL-ZEPHYR	MERCEDES BENZ	RILEY	VAUXHALL
1957-59		1955-59*	1957-59	1958-59
BMW (ISETTA 600)	ZODIAC	MGA	ROVER	VOLKSWAGEN
1958-59	1957-59	1958-59	1958-59	1952-57*
BORGWARD	FIAT ROADSTER	MORRIS MINOR	SAAB	VOLKSWAGEN
1957-59*		1956-59	1958-59	1958-59*
BRISTOL 1957-59	1957-59	NSU PRINZ OPEL 1958-59	SIMCA ARONDE 1958-59	VOLKSWAGEN GHIA
CITROEN (ID-19)	FIAT (600-1100)	PANHARD	SIMCA VERSAILLES	VOLKSWAGEN BUS
1956-59	1957-59	1957-59*	1958-59*	
CITROEN (DS-19)	GOGOMOBIL	PORSCHE (ALL)	SIMCA CPE. DE VILLE	VOLVO
1958-59*	1958-59*	1957-59*	1958-59	1957-59*

COMPLETE NOTHING ELSE TO BUY. **ONLY 2.00 DOWN** 

#### **NEW! MOTOROLA TRANSISTOR-POWERED MANUAL TUNING CAR RADIO**

Also Available for Sports Cars with\* in Chart Above

2.00 Down

Specify make and year of your car

BUICK	NASH RAMBLER
1954 thru 59	1957 thru 59
CHEVROLET	OLDSMOBILE
1953 thru 60	1954 thru 59
GMC TRUCK	PLYMOUTH
1953 thru 60	1953 thru 59
EDSEL	PONTIAC
1958 thru 59	1957 Ihru 59
FORD	STUDEBAKER
1953 thru 60	1955 thru 60



Complete with External Oval PM Speaker This transistor powered car radia installs easily an the dash of most cars. Features 7 tuned circuits with 5 tubes plus transistor, noise eliminator-circuit, automatic volume control, tone control and 6 x 9" external speaker. Size 71/2" W x 21/3" H x 51/4" D. For 12 volt cars. Shag. wt., 7 lbs.

CR-10 5.00 Down Net 50.20 For 6 volt cars. Similar to obove, but with 5 tubes and rectifier, no transistor, and 5" x 7" external speaker. Shpg. wt., 9 lbs.

#### **NEW! ALL TRANSISTOR CAR RADIO**

- Easily Installed No Holes To Drill Built In Map Reading Light Non-Glare 2 Way Mirror No Diai Plate Necessary

- 12 Volt Operation Only



Standard external antenna not needed-unit has built-in non-directional ferrite antenna-radio plays with constant volume regardless of car's direction.

Fully transistarized — Extremely law power drain Interference reduced to an obsolute minimum Extremely powerful fringe area reception and true Hi-FI reproduction Uniquely constructed and mounted to withstand any shack or vibration A revolutionary new concept in the design and placement of a car radio. The entire receiving unit of this unique all transistar radio has been engineered into a 2 way rear view mirror which easily replaced the standard mirror of any car.

#### **SCHAUER KAR-START**



STARTS WET OR COLD **ENGINES** INSTANTLY

If you park your car outside in wet or wintry weather, you need Kar-Start. At instant of starting, Kor-Start sends five times the normal amount of spark from your plugs for sure-fire starts. Used for starting only. It is automatically disconnected when engine is running. Will not damage plues or distributor. Simply, easily installed with just 3 quick connections. Save your battery, time and temper. Shipping weight t ib.


MS-609 for 6 V cars List 6.50 net \$4.20 MS-700 for 12 V cars List 7.95 net \$5.15

#### 3 SECTION 59" **AUTO ANTENNA**

- Easy to Mount
  Pulls In Those Long Distance Stations
  Rust Proof Construction

Measures 23" collapsed and extends to 59". Emplays polyethylene insulator — easy mounts on fender or trunk. Shpg. wt., 11/4 lb. A'A-21

## .....Net 1.89



#### 8 FT. BATTERY BOOSTER CABLES

A MUST FOR ALL CARS WITH AUTOMATIC TRANSMISSIONS

#### **REAR SEAT AUTO SPEAKER KITS**



#### 6" x 9" KIT WITH CHROME OR GOLD GRILLE

DELUXE 6" x 9" KIT with 2.15 oz. ALNICO V MAGNET Same as above but with deluxe speaker with extra-heavy Alnica V magnet (2.15 az.). This is same speaker used in kits selling at twice the price. Shpp. wt., 5 lbs.

SK-37 Speaker kit (specify chrome or gold grille).

5" x 7" KIT

#### FADER TYPE AUTO KITS

BUY ON LAFAYETTE'S NEW EASY TERMS — SEE PAGE 44

### MICROPHONES Hine Zuality Save from 50% to 75% !!!



PRICE 3.95 each singly, ea. In lots of 3

afayette makes history with a high quality CRYSTAL MICROPHONE at a price that is 50%, less than any comparable Crystal Microphone on the market today. Excellent for PA systems, home recorders and general applications, Frequency response 30 to 10,000 cycles. Output level—52 db. provides ample output for use with low gain amplifiers. Uses quality moisture sealed crystal; ow gain amplifiers. Uses quality moisture sealed crystal; objects of the market with the chrome grill. Completely equipped with 5 feet of chrome grill. Gompletely equipped with 5 feet of chrome grill. Completely equipped with 5 feet of chrome grill. Completely equipped with 5 feet of chrome grill. Ships. Wt. 31/2 ibs. 3 feet of chrome grill. Ships. Wt. 31/2 ibs. 3 feet of chrome grill. Ships. Wt. 31/2 ibs. 3 feet of chrome grill. Ships. Wt. 31/2 ibs. 3 feet of chrome grill. Ships. Ships

PA-24—In lots of 3, each Singly, each



Here is a microphone with a 360° pickup, and the added power and sensitivity of two individually shock mounted and phased crystal cartridges. This arrongement assures you of maximum pickup from all sides. Swivel mounted to give fuller flexibility. Case is chrome plated. Standard 1/4". 27 thread. Overall size 7" H x 3" W complete with 4 ft, cable. Shpg. wt. 4

.....Net 5.75



A new, attractively styled crystal microphone for all general applications such as public address and home recording—at a history making law pricel Frequency response 30-10,000 cycles. Output level—52 db. Titing head, attractive plastic case. Can be used an any stand with ½ 27 thread. Completely equipped with 5 ft, plastic cavered shielded cable. Grill diam. 2½", depth 3½", height 4". Shpg. wt., 2 lbs. One of the best buys in the country!



NEW CONTACT MICROPHONE



A slim crystal microphone for desk tap or hand-held use that is uniquely designed for universal application, smartly styled and attractively finished. Changes in temperature and humidity do not affect its efficiency, nor does increasing the cable length increase noise or change frequency characteristics. Ingeniaus swivel mounting permits horizontal and vertical rotation for most convenient angle of use. Microphone easily removed from base for holding in hand. Microphone, base, grill and all fittings are chrome finished. Has a wide range smooth frequency response and an omni-directional polar pattern. Built-in tacking type on-off slide switch. Microphone is only 3" long x 1" max, dia. Shpg. wt., 2 lbs.

PA-45—Microphone. Complete with Stand.....Net 3.95

PA-45-Microphone Complete with Stand.....Net 3.95

#### NEW "DYNA-SLIM" MICROPHONE

- HIGH IMPEDANCE 50,000 OHMS
  ON-OFF SWITCH
  "QUICK-SLIP" ADAPTER

6.95

New dynomic, high output micraphone with all the features of "mikes" costing 3 times Lafeyette's price! Output level —55 db. Smooth response from 60 to 10,000 cycles. Omnidirectional head. External on-off switch. Slips on ar off stand adapter in a wink. Standard ½" — 27 adapter permits tilting mike for multi-angle use. Sotin black and chrome finish. Complete with detachable coble and connector. 8" long. 1¼" max. dia. tapered barrel 7". Shpg. 1¼" max. dia. tapered barrel 7". Shpg. 1¼. 2 lbs.



May be hand-held, stand mounted or suspended by lavalier cord.

Frequency 6D-10,000 CPS
On-Off Switch

A tremendous valuel Unique design, only 4½" L x 1½" diam. Comes complete with swivel adopter to fit all standard mike stands, and lavolier card and bracket which leaves both hands free. Smooth wide range response. Lacking type anoff side switch. Detachable 7 ft. coble and connector, Shpg. wt. 2 lbs.

Singly, Eoch



LAPEL MICROPHONE

• Full — 55 db. OUTPUT LEVEL!
IDEAL GENERAL PURPOSE MIKE

Ideal general purpose mike. Specially engineered crystal Microphane. Attaches to lapel. Only 1 1/8" in diameter. Exceptional frequency response. Output level — 55 db. Chrome plated case and clip for attaching to lapel. Includes 5 ft. af shielded cable. PA.9

#### "WRIST WATCH" CRYSTAL MICROPHONE

- SENSITIVE
- · HIGH OUTPUT
- PERFECT FOR SECRET PICKUPS
- APPEARS & IS WORN EXACTLY LIKE A REAL

WATCH 



NEW! CRYSTAL THROAT MICROPHONE

A crystal throat microphone with a myriad of uses! Its high sensitivity and high output permits its use with any standard high impedance crystal microphone input. Its relatively wide frequency range provides a high degree of Intelligibility for voice in public address or communications work. Requires no special power supply as do corbon-type throat mikes. Complete with flexible neckbond and flexible 5½' cable (less connector). Shpp. wt., ½ lb.

#### SLIM DYNAMIC MICROPHONE

- DUAL IMPEDANCE
- 50,000 AND 250 OHMS
- HIGH OUTPUT 50-11,000 CYCLES USE ON STAND OR AS

PA-29 In lots of 3, Each 9.25 Single, Each 9.95

NEW DYNAMIC MICROPHONE FOR DESK-TOP, HAND HELD, OR LAVALIER USE



### **ASTATIC M-150** RECORDER MIKE

AMAZING PERFORMANCE AT

AN AMAZINGLY LOW PRICE IDEAL REPLACEMENT MIKE FOR TAPE RECORDERS

M-156 (ASTATIC M-150) Shpg. wt. 1 lb. .....Net 3.82



#### HARMONICA CONTACT MICROPHONE

#### SPECIAL lafayette VALUES!

MIKE STAND

POPULAR MIKE CONNECTORS



MS-467 Female connector



sturdily constructed case for amplifier and two 12" akers. Made of heavy plywood with reinfarced metal ners. Cose splits into 2 baffles, each with leather carry-handle. Strong wire mesh grilles covered with attractive th. Hos Z hooks in each half far carrying speaker cobles I provision for mike and mike base. 4 snap locks. In adimensions 201/2 h, 15-9/16w, 143/4 d. Covered in k blue washable leatherette. Shpg. wt., 20 lbt. 5-1WX

STUDIO DYNAMIC MICROPHONE



IDEAL FOR HOME, OFFICE OR STUDIO USE

• FREQUENCY RESPONSE-50-11,000 cps.

HIGH IMPEDANCE-50,000 OHMS. HIGH OUTPUT

A revelation in microphone value, this high quality annidirectional dynamic microphone provides features faund in
microphones selling for many times the price. Employing
a unique swil ridged aluminum diaphrogm completely
sealed and gasketed against high humidity and temperature conditions, the PA proves Itself ideal for a wide variety of applications, such as tape recording, church, charal
traups and theatrical use. The 360° stirruped shoped
bracket provides for mounting with any %"-27 thread
floor, desk stand or boom maunt. Finished in an attractive
gunmetal grey the microphane is supplied with 4%s'
shielded cable. Shap, wt., 1 lb.
PA-49 STUDIO DYNAMIC MICROPHONE......Net 11.95

VALUE 49.50

#### NEW! **DUAL IMPEDANCE** SLIM DYNAMIC MICROPHONE

- RUGGEDLY CONSTRUCTED
   ON-DFF SWITCH
   600 & 50,000 OHM IMPEDANCES SE-LECTED BY SIMPLE ROTATION OF PLUG

Beautiful, professional-looking dynomic with solidly-cast, topered, slim case with satin-chrome finish. Heavy duty slide-type an-off switch. Built-in transformer supplies dual unbalanced impedances—low Z is 600 ohms, high Z is 50,000 Ohms. Swivel mount fits all standard 3/m.27 threaded stands. Blast filter eliminates unpleasant "pops" with vaice use. Omnidirectional when used vertically—cordioid pottern when titled. Engineering design and finish are of the highest quality, making this microphone excellent for any application. Complete with 5 ft. plug-in cable. Shop. wt., 2½ lbs.

PA- 46

### ARGONNE ALL-PURPOSE DYNAMIC MICROPHONE

- DUAL IMPEDANCE-250 & 50,000 OHMS USABLE RESPONSE 50-18,000 CPS
- FOR HAND-HELD, DESK OR FLOOR STAND USE
- IDEAL FOR TAPE RECORDING, PAGING, COMMUNICATIONS



#### DANBURY MARINE CLOCK 49.50 Value

29.95 .

• Exceptional Accuracy
—2 min in 8 days! • 4 Jewels-Lever Escapement!

• 5 1/8" Overall Diam.!

The ideal accessory for your boat—baathouse—dock—mane ideal accessory for your boat—baarnouse—acck—ma-ina—shipyard. Clean—functional design blends gracefully with any decor. Perfect in the affice—bank—librory or liv-ing room. Beoutiful simplicity, 8 doy movement of amozing room. Beoutiful simplicity. 8 day movement at amozing occuracy—less than 2 min, variation in 8 days. Four jewels, lever escopement—and unique regulator maintain occuracy indefinitely. Full "morine" size—2½" deep x 57%" overall diameter. Silvered dial-front wind and front speed regulation. Solid bross cases—finest German movement. Shop wt 21% like. Shpg. wt., 21/2 lbs.

F-523 Chrome Plote finish



#### **NEW!** Cordomatic Mobile-Lite Reel Completely Portable \*Light & power anywhere!

New Mobile-Lite Reel throws a wide, bright beom of light wherever it's needed, while o built in electricol outlet provides power for tools or appliances. Completely portable for use all around the house. Ideal for attic, basement or garage... and perfect for outdoor illumination of potio, lawn or garden. Cord locks and releases at any desired length... autamatically retracts when not in use. Phenolic pistol-grip handle on universal swivel permits light to be adjusted in any position. The new Mobile-Lite Reel accommodates a 150-wat reflector flood spot-light of incandescent bulb. 20 ft. cord, 7 amp rating, Honging hoad on back of cose permits wall mounting. Less hubb. Shee

FL-78 Net 8.22

Portable Outlet: Similar to above, except does not include lamp fixture. 3 way outlet aperates several tools or appliantes at once. Eliminates farever the inconvenience and hozard at tangled cords. 15 ft. card, 10 amp rating. Shpg. wt., 2½ bs.

LAFAYETTE'S "READ-EASE"

WHILE RECLINING 4.95

S.O.S. Magnetic WARNING SIGNAL 4" TWOFACED PARABOLIC REFLECTOR
 NEW SUPER REFLECTIVE SURFACE
 NO MOVING PARTS — BULBS — WIRES

NO MOVING PARTS — BULBS — WIRES

The S.O.S. Emergency Warning Signal is the simplest, most dependable and practical safety device ever affered to help pratect you in all emergencies. No moving ports to help pratect you in all emergencies. No moving ports on the control of the

Reg.

21.95

**BVI** Automatic

Electric Can Opener

- Opens cans of any size or
- Quick Clean Safe

14.95

Fully automatic — fully guaranteed. Compact, portoble, light weight. Simple, one lever operation. Fixed magnetic arm. Opens any size or shope con. Removoble cutter blade. White, refrigerator-type finish wipes clean with a damp cloth. Quick operation—fin gertip cantral. Stoin resistant thermoplastic housing. Only 51/a" x 57/a" x 73/a" averall. Fits in anywherel 110-120 volt 50/60 cycle AC anly. 6 ft. cord. Shpg. wt., 51/2 lbs.


### 24 Hour Electric WORLD CLOCK

Adjustable for **Various Time Zones** 

South Polar

8" Overall diamete

Net 8.47



#### **NEW!** Easy-Heat Automatic Heat Band

• Sure-Safe-Freeze Protection

· Protect Water

spouts, Gutters Home-Farm-Mobile Plumbing

**Built in thermostat** 

Stock No.	Longth	Watts	Shpg. wt.	Net
EL-80	6 ft.	30	8 oz.	4.85
EL-81	12 ft.	60	1 lb.	5.57
EL-82	18 ft.	90	1 ½ lb.	6.24
EL-83	24 ft.	120	2 lbs.	6.84

Light - ONLY 4 LBS. COMPLETE

Goodyear VAC-ETTE! with Attachments

Quiet — AC/DC UNIVERSAL MOTOR

- ALL METAL Sturdy -CONSTRUCTION

ver packed—all purpose—hand vacuum cleaner. Designed wer packed—all purpose—hand vacuum cleaner. Designed purpose—hand vacuum cleaner. Designed purpose—hand vacuum cleaner. Designed purpose—hand vacuum cleaner. Designed purpose packed purpose pur

2 IN 1 2in1



#### PERSONAL 1 TUBE RADIO

WIRELESS HOME BROADCASTER

6.53

BATTERIES

Net 2.08 BA-125 45 V. Shpg. wt., 12 oz

> SUPER DIAL-A-MATIC ADDING MACHINE



- . ADDS UP TO 999,999 ACCURATELY I
- SUBTRACTS AND MULTIPLIES TOO I
- AUTOMATIC CLEARING BAR I

Newest "Dial-A-Moitc" adding machine. Great for daily calculation - small businesses - homework - etc. Automatic clearing bar clears all dials Instantly. Polyethylene, skidproof base for canvenient one hand operation. All moving parts of DuPant Nylon. With dialing stylus and instructions. Shape. vt., 1 bb.

Net 2.70
Tace Olai-A-Matic: Similar to Super Diai-A-Matic adds ta 99,999. Does not have automatic clearing traccurate-fits packet ar purse. Shpg. wt., ½ tb.

89



Super Suction Power!

• Guaranteed for 1 full year! Designed for easier cleaning!

#### ADJUSTABLE DESK LAMPS



21.32



9.56

Flexo all purpose lamp. Designed to provide adjustment to any position or angliand sturdily constructed for a lifetime a service. No exposed wiring. Air Coales Shade. Will stand up better under conditions of vibration. Maximum extension 34". Lamp swivels around at base and a shade and swivels at each joint for universal adjustment to any of countless different positions, Shade 51½" in diameter 6" deep. Switch an shade. Use standar incandescent bulb. Clamp removable for surface mounting. Shpg. wt., 5 bs.

#### **HUMIDICATOR- "Slide Rule"** HYGROMETER Sue O

-

- Slide Rule Readings
- No Computing -
- No Conversion
- Exceptional Ease and

Accuracy
The most recent innovation in weather instruments. Fastest—easiest method of determining relative humidity. With the cursor (stilde) set on the temperature, the relating humidity instead directly off the humidity instead group. Does away completely with tables, charts and time consuming calculations. The "stiderule" colculator carrelates wet and dry bulb readings and "callis-out" percent of relative humidity. The "Humidicator" graph is colibrated an increments of 26 from 20°F, to 120°F, Backsround calors chosen far easy readibility and instant reference to "Humidicator" graph. Specially treated gauge for wet thermometer has increased "wetting" capacity. Overall size, including clatern, is 13½" x 3½". All mounted an a mahogany board with pravision for hanging. Shop. wt., 1 lb.

F-496

Net 4.95

#### SHEAR MAGIC Cuts EVERYTHING!

From Metal to paper!

High grode, compound leverage, multi-purpose shears. Cuts just aboout everything that needs cutting. Paper—cloth—asphalt tile-rubber tile-wallboard-wire-sheet metal-cableshingles — flowers — vines — shrubs — plastic — lipoleum — convos — carpet — metal fail — fibre baard — corel — shingles — and hundreds mare. A basic tool for indoors ar autdoors—necessary as a screwdriver, hommer or pliers. 81/2" long, chrome plated hondles, tool steel blades with black oxide finish. Shpg. wt., 1 fb.

NEW! A SCIENTIFIC INSTRUMENT FOR THE EXPERIMENTERS... MINIATURE ATOM SMASHER PRODUCES 75,000

NOVATRON

**VOLTS** ABSOLUTELY

SAFE 11.95

COMPLETELY WIRED (NOT A KIT)





• FAST — EFFICIENT — PROFESSIONAL RESULTS ms and shapes nails quickly and easily. Remailauses — cuticle — dry skin fast and efficiently. Stationed, battery operated mator. The Electric Mare Set has tiny emery wheels, silicon carbon where mois, cotton buffer, fine brush — all slip easily of the control of

### MINIATURE MUSIC



**BOX MOVEMENTS** 

- PRECISION MOVING PARTS
   MORE THAN 3-MINUTES
   PLAYING TIME

RUGGEDLY BUILT
BEAUTIFUL TONE

IS-578 AULD LANG SYNE IS-579 HAPPY BIRTHDAY IS-580 HERE COMES THE BRIDE IS-581 BLUE DANUBE WALTZ	Net	1.88
--	-----	------

#### NEW! ELECTRIC MUSIC BOX MOVEMENTS SPECIAL -ALL 4 for 6.95

Operates on a single flashlight cell \* Full 18 note scales "Mointains perfect pitch
Uses limited only by your imagination! Battery operation opens a whole new field of applications. No
springs to run down-no keys to wind! Precision built
miniature mater and moving parts are designed to lost
a lifetime. Con be used anyhwere ordinary movemen's
are used—plus many more places. You can have a
model train layouts! store displays annuritate. model train layouts! store displays! annunciators. Med sures only 3" by 1%" by 76". Operates from an

Mc 740 M., 6 oz.	
MS-760 Moonlight Serenade	1.88
ma-701 Smake Gets in Your Evec	1 00
MS-762 How Dry I Am.	
MS-763 Around the World in 80 Days	88.1
The World In 80 Days	88.1

New! The GIZMO 10 way Combination



HO-678



### SAVE NOW • Special Sports Sets

These matched sets save you even morel Specially selected top quality—latest designs. Combinations selected for ease of handling—include all necessary basic equipment—offer you more fishing fun ond enjoyment at budget prices. Items sold separately cost more—you save by purchasing the complete set. Check these kits for features found only in much higher priced equipment.



Special Spin Set: "Best-Buy" spinning autifit. Especially desirable for beginners—fine enough for the "ald-pra." Set includes: Tubular fiberglass 5 ft. spinning rad (FT-501), simple-to-use, light spinning ree! (FT-512), 200 yds. of 6 lb. monofilament line (FT-527), 24 finest, divided wing flies (FT-531), rigid polyethylene tackle box (MC-25). If purchased separately would cast 10.47.
FT-50S Shpg. wt., 4 lbs. .Net 8.99

Safayette

Replacement battery far abave: BA-153 "N" cell.

Net 6.29

Replacement battery far abave: BA-153 "N" cell.

Net .08

Electro-Strikeometer® NEW ELECTRONIC "FISH-KILLER"! ENDS "MISSES" FOREVER! No Nibble Too Light To Notice! Fresh Or Salt Water—Fits All Rods

AMAZING!



"Push Buttan" Spin Cast Set: An easily handled casting set. Designed to give the fisherman complete cantral. Most popular autifit—cantains all necessary basic equipment. Set includes: 5½ ff. glass spin-cast rod (FT-503), "Push Button" spin cast reel (FT-516) pre waund with 80 yds. af 6 lb. manofilament line, practical plug 12 selected "pappers" (FT-529), and rigid, polyethylene tackle bax (MC-25) Shap wt 5 lbs.




16.95

(FT-528)

"Spin-Tacular" Spinning Set. The finest all 'raund spinning gear far the maney. Suitable far both fresh and light solt water spinning. Matched camponents for ease in handling, lang life and extra enjayment. Set includes: 6½ ft. hallow glass "7 Seas" rod (FT-502), "Spin-Tacular" all-purpose spinning reel (FT-513), 200 yds. 8 lb. monofilament line (FT-528), 24 "New England" Solamon streamers (FT-532), rigged warm lure (FT-526), rigged eel lure (FT-525), and rigid palyethylene tackle box (MC-25). Shpg. wt., 5½ lbs.

FT-507 Net 16.95

### **COMBINATION BAIT-CAST AND FLY-CAST KIT**



Fine Quality Split Bamboo Rod

Converts from 8 ft. Fly Rod to 5'4" Casting Rod

The perfect all-around "Fishermans-Friend." Features a split bambao rod with interchangeable tips and reversible handle. Chrame plated, screw locking reel seal. Shaped cork handle. Chramed stainless steel guides and extra deep chromed brass ferrules. High glass lacquered surface-calarful, sealed nylan windings. Kit contains 4 pc. Split bamboo rod, brass swivel, split-shot, line winder, float, nylan line, 12 assorted flies, 2 streamers, 6 hallow point hooks with teaders, leader cutting scissars and fitted wooden cose to hald complete kit. Shpg. wt., 3 lbs.

FT-504 Regularly 9.95

### LAFAYETTE'S CATCH OF THE CENTURY IN RODS AND REELS (A) SPECAL TUBULAR FIBREGLASS SPINNING ROD



FT-525)

(FT-526)

MAN

3.29

GENUINE TUBULAR SUPER GLASS ROD • STANDS ROUGHEST ACTION-NEEDS MINIMUM CARE • SOLID-COMFORTABLE-NATURAL CORK GRIP • SINGLE WIRE-NON FOULING GUIDES

A first quality tubular (hollow) fibreglass spinning rod—plenty of power, action and eye appeal. All the features of rods selling for above Lofayette's price. Solid-comfortable-natural cork handle with anodized aluminum real retaining rings. Holds reel solidly and seturely. Extra large guides with neat, even nylon wropping. Sealed against maisture. Long, strong extra deep joining ferrule-precisely fitted. Guides are hard-rust resistant—and properly spaced. Braced tip-top guide. Entire rod finished in hard, durable, black larquer. Popular 2 piece, 5 foot length. Shpg., wt., 1½ lbs.

FT-501 FIBREGLASS SPINNING ROD.

Net 3.29

(B) TUBULAR FIBREGLASS SPIN-CAST ROD



● 51/2 FT. MEDIUM-LIGHT ACTION ● POSITIVE LOCK REEL SEAT

Finest 2 plece, hollow-Lioni Action Positive Lock REL SEAI
Finest 2 plece, hollow fibregloss, meanum-light action spin cost rock five inch web, shoped cork grip on a die cost aluminum offset handle. Positive, threaded ring, locking reel seat. Designed for closed face spin cast reels! Chrome plated, stainless steel guides and braced, offset tip-top. Chromed, stainless buttplate. Extra deep, precisely fitted ferrules. Colorful, sealed, nylon wroppings. Fine action with plenty of back bone. Costs flies, streamers, bugs and poppers. Shpg. wt., 1½ lbs.

FT-503 FIBREGLASS SPIN-CAST ROD.

Net 3.95

(C) TUBULAR FIBREGLASS "7 SEAS" SPINNING ROD

5.95



● FOR FRESH AND SALT WATER SPINNING! ● ACTUAL WEIGHT UNLY 5 OZS.! ● COMPARE TO RODS SELLING FOR TWICE AS MUCH


(D) SPECIAL SPINNING REEL

OGUD ANODIZED SPOOL ONYLON BEVEL GEAR OANTI-REVERSE LOCK

A fine, light spinning reel with all the features found in far more expensive reels. Strong-sturdy handsome appearance. Selective anti-reverse lock. Chrome plated pickup arm. Body of non-corroding, abony finished, aluminum alloy. Housing and spool of gold anodized aluminum for maximum corrosion resistance. Noticeless, smooth running, nylon bevel gear. Handle is removable for storage. Holds 200 yds. of 4 lb. Jest line. Gear ratio of 3 to 1. Shpg. wt., 1 lbs.

PT-512 SPINNING REEL

(E) PUSH BUTTON SPIN CAST REEL



### (F) NEW! "SPIN-TACULAR" REEL

• INTERCHANGEABLE SPOOLS • FINGER TIP ANTI-REVERSE

Finest-fastest imported spin reel. Ultra smooth recovery, ratio about 4 to 1. Full boil, stoinless pickup. Positive, smooth drag with click built into spool. Friction free line guide of diamond-hard tungsten carbide. Positive anti-reverse clutch—no manual holding when playing, netting or trailing. Metal reel with two interchangeable spools. Capacities of from 200 yds. of 10 lb. line, 340 yds. of 6 lb. line, 100 yds. of 4 lb. line, down to 200 yds. of 3 lb. line. "Natural-form" knob on reel handle, handle folds back for storage. Corrosion resistant black finish. Camplete with extra spool, spool case, cloth bag and instructions. Actual weight 9 ass.

(G) NEW! "7 SEAS" SPIN REEL

• ALL THE FEATURES OF THE MOST EXPENSIVE REELS

The "greatest" for surf-costing, tralling, spinning or ony salt water Fishing. High pressure moulded of an aluminum-magnesium alloy, surface treated and anti-corrosion coated. Eliminotes need for the usual care and cleaning associated with solt water gear. Unique planetary gear system crosswinds line for greater line capacity and the smoothest, langest casts you ever model "Back-lash" is a thing of the post. Fully adjustable, positive drag action. Built right into the spool for smooth, constant tension. Full bail pick up of chromed bronze. Line guide of super hard chromium carbide. Torpedo handle, spring loaded, folds back for storage. Positive finger tip anti-reverse control. All the features normally found in the most expensive reels. Actual weight 19 ass. Shpg. Wt., 2 lbs. FT-514 "7 SEAS" SPIN REEL

(H) "7 SEAS" TROLLING REEL

FINGERTIP FREE SPOOL CLUTCH • ADJUSTABLE STAR DRAG
Universal solt water reel, Powerful star drag, free spool, fast retrieve. All metal construction of highly corrosion resistant allays. Aluminum-magnesium allay spool. 3 inch diameter side plotes—with solin black, triple baked, rust resistant, permanent finish. Conventional free spool lever. Hardened bronze gears. Caunter weighted, torpeda handle. Chrome ploted, hand polished frame. Self lubricating, long lasting bronze bearings. Capacity 250 yds. of 27 lb. line. Actual weight 17 azs. Shpg. wt., 1½ lbs.

FT-515 "7 SEAS" TROLLING REEL

Net 7.95

**Beachcomber Tackle Box** 

Canstructed of rigid palyethylene, this rugged box will withstand warping, denting, cracking, breaking and carrasian. Solid brass hardware and nylan latch. Handy cantilever tray pravides far lures and small tackle with ample room in the botton for bait and spincasting reels. Dimensions 12% long x 4%" deep x 5%" wide. Welghs anly 1% lbs.

MC-25 BEACHCOMBER BOX Net 2.05



5.95 • RIGGED WORM

Lafayette's awn selection af praven fish getters. 86 tap quality, expertly tied and fitted flies, streamers and poppers, assorted wet and dry flies include the most papular patterns—Royal Coachman, Black Grat, Silver Doctar, Red fles, etc. The divided wing flies, made with natural tip hackle, include such favorites as Yellaw Sally, Parma Belle, Quill Gardan, Royal Caachman, etc. The streamers include Black Ghast, Grey Ghost, Light Tiger, Jack Scatt, etc. The poppers include scaled bodies, frog types, apen mawths hula skirts, hackle tails and feather tails. Seven dozen of the deadliest fish getters—plus a saft plastic worm an a 3 hook harness and black plastic eel an a 2 hook harness. Shpg. wt., 1 lb.

BURGESS BOAT-LITE

KIT Easy To Install-

No Extras To Buy

Meets U. S. C. G.

Requirements For All Class "A" And Class "1" Boats



New Burgess Boat-lite kit-ful af features never befare affered to small boot awners. Contains everything needed to meet U. S. Coast Guard requirements for lights an small boats. New cambination bow light with aptically perfect Red-Green fresnel lens. Projects light over one mile. Correctly shielded. Made af special carrosian-resistant aluminum allay. New stern light-flag staff has unique plug-in feature. Quick-easy remaval far safe keeping. Na nails, screws or clamps—just plugs in. Corrosian-resistant aluminum allay with lamp visible for 2 miles, Kit Includes heavy-duty, 6 valt, sealed-in-steel battery, all necessary hardware, maunting brackets, wire, weather-proaf switch and instructions. Shpg. wt. 7 lbs.

heavy-duty, 6 val maunting brackets, wt., 7 lbs. ML-177 ..... Net 8.20

#### MARINE COMPASS

JEWELED MOVEMENT
 BRASS GIMBAL
 2° GRADUATIONS



## **WE INVITE COMPARISON!**

## LAFAYETTE CAMERA DIVISION presents the 'RANGEFINDER II' SYSTEM versatility at low cost

• 5 ELEMENT F2.8 COATED LENS! • COUPLED RANGEFINDER

only 29.95 less

Case

J BRILLIANT COMBINED VIEW-RANGE FINDER! J SINGLE STROKE RAPID FILM

TRANSPORT! J NINE SHUTTER SPEEDS TO 1/300! J MXF SYN-ALL SPEEDS —

ALL BULBS — PLUS STROBE! J F2.8 45mm COATED LENS! J HI-SPEED REWIND!

J STANDARD PC FLASH TERMINAL! J DOUBLE EXPOSURE PREVENTION!

J BUILT-IN SELF TIMER! BUILT-IN SELF TIMER!

electranic flash. Speeds from 1 sec to 1/300th. Rapid advance sets shutter, counts exposure and transparts firm. Built-in delapped action inter — automatic exposure caunter and film stap. Hi-speed rewind with falding lever. Standard accessory shae an top-film type indicator. All metal bady with brushed chrame trimbiack leatherette cavering. 20 or 36 exposures an black and white ar calar 35mm film. PG flash terminal. Shaps. wt., 3 lbs. Use steries 6 accessories.

F-485 Less Case and Expasure Meter
F-486 Leather Eveready Case. Shaps. wt., ½ lb.
F-487 Less Case ond Expasure Meter Shaps. wt., ½ lb.
F-351 Clay-an Exposure Meter Shaps. wt., ½ azs.
Special Cambination Offer: Includes camera abave—Eveready case—felding BC flash gun—and clip-an exposure meter. Shaps. wt., ¼ lbs.

Exposure meter illustrated not included.
F-487 2.00 Dawn Net 39.95

- AUXILIARY LENSES TELEPHOTO - TWICE AS CLOSE!
- WIDE ANGLE 75% MORE CLOSE UP DOWN TO 61/2"I



0 025.	
F-488- AUX. TELEPHOTO LENS (A)	Net 9.90
F-489 AUX. WIDE ANGLE LENS (A)	Net 9.90
F-294 CLOSE UP SET (B)	Net 8.91
F-408 VIEW FINDER FOR TELEPHOTO AND W-A LENS (C) F-490 Adapter ring far clase up set, filters and auxiliary lenses. (D) Shpg	
PACKAGE DEAL: One each of the auxiliary lenses, close up set, adapter, and view finder. Shpg. wt., 11/2 lbs.	Net 1.95
F-491 2.00 Dawn	Net 29.95

### NEW-BOOSTER EXPOSURE METER WITH BOOSTER

● ASA Scale—LVS Scale ● Stills or Movies

Includes booster—Leather cases—neck cord

extremely versatile — extremely simple. Highly legible direct reading dial. Speeds fram 4 sec. to 1/1000 sec. Lens aperture settings fram f:1 to f:32, ASA scale 6 to 8800. LVS scale 1 to 18. Cine scale 8, 16, 24 and 32 frames per second. Baaster cell makes passible readings at extremely law light levels. Smoll-rugged-lightweight. Includes baaster cell, leather cases, neck cord and instructions. Shpg. wt., 1 lb.



#### FOLDING BC FLASH GUN



FOLDS LIKE A FAN TO 4" x 2"!

• EFFICIENT 8-C OPERATION!

Brand new—unique—packet size—campletely falding flash unit at Lafayette's famaus law-cast! Efficient 4½" diameter metal reflectr has pebbled finish to eliminate hat spats. B-C cambination for surefire and hi valtage, Heavy malded battery case with built in test lamp—bulb ejector—extension socket. Standard shae with pressure adjust fits accessary clips. Uses standard bayanet base flash bulbs. Navel, useful exposure guide built in an rear af case. Complete with card for PC fitting and candenser. Shpg. wt., 1 lb.

**NEW! KONILETTE** 10 PC. KIT



- Sharp 45 mm F3.5 coated color corrected lens
- Flash synchronized shutter to 1/200th sec.
- Automatic rapid film Transport lever
- All metal body, leather and chrome finish

Precision 35mm camera—price to fit every budget—features found in for more expensive models.

"35" CLIP-ON EXPOSURE METER



ASA scale 6 to 3200

 Measures reflected and incident light Exceptionally convenient exposure meter. Clips right an camera—quick easy reading. Gives better, more accurately exposed pictures with a minimum of effort. Speeds 1/1000 to 30 sec. Lens aperture f:1 to f:22. Light volue scale (LVS) from 1 to 18. Cine settings from 8 to 64 frames per ecc. Measures reflected and incident light. Maunts on camera or may be hand held. Complete with leather case and instructions. Shpg. wt., ½ lb.

## ELEVATOR

#### **New "SPEEDLITE" Electronic Photoflash system** 110V AC or Midget Battery Pack

• FEATHERWEIGHT • SUPER POWERED • 4 SECOND RECYCLE • 50

WATT SEC. OUTPUT • COLOR BALANCED LIGHT • BUILT IN DIFFUSER

A Designed by ane of the faremast electronic flash engineers. Mare pawer—mare practical teotures than any other unit in its price class. Thausands of flashes from one lifetime tube—pays for itself in sovings an flash-bulbs—less than ½ cent per flash. Featherweight flash head weighs anly 16 ozs. Entire unit—including battery—anly 2 lbs. 4 azs. Battery pack measures 5½" x 3" x 1½"—fits gadget bag or pocket. Cailed card extends 5 ft. far aff-camera or baunce flash. 15 ft. AC card gives practically unlimited movement when aperating an AC. Universal bracket fits any camera with a tripad sacket. Gun also maunts an side af portoble pack. Light is calar balanced (6500° Kelvin) far calar pictures without filters. Kodachrame guide 25—Tri-X guide 120. Recycles in 3 ta 4 secands. Speed 1/700 sec. flash duration. Gives soft, even, wide angle illumination. "Ready" light an head indicates flash is ready to fire. "Easy-aff" clamp permits rapid off camera use. Sacket an head far extension or multiple flash use. For any camera having X (zero delay) synchronization. Camplete with baltery, partable pack, 5 ft. cailed cord, shutter card, 15 ft. A.C. card, mounting bracket, clamp and instruction back. Shpg. wt., 4 lbs.

2.00 Down

Net 25.95

"Bia-lite". Ring type strabe flash attachment. Far perfectly flat, shadowless phatas. Maunts an lens far clase ups. Far studies in medicine, bialagy, botany, numismatics, philately. Same guide numbers as F-370.
Fits series 6 adapter ring. Shpg. wt. 2 ibs.

7-501

7-80-1666

Fits series 6 adapter ring. Shpg. wt. 2 lbs.

F-501

2.00 Down

Net 22.50

(C) "Baoster" Capacitor. Fits on the bottom of F-370 Speedlite. Easy clamp-an attachment. Furnishes dauble the normal light output. Shpg. wt.

F-502

(D) EXTRA HEAD. Camplete, secand lamp head for extension use with the Baaster. Shpg. wt.

F-503 NEW "mini-pro" 2" x 2" MM SLIDE PROJECTOR OMPACT - ONLY 8½" x 6" x 4½" OVERALL
BRIGHTER - SHARPER - EVEN IN LIGHTED ROOMS





35 mm Slide File 1.69 HOLDS UP TO 300 SLIDES

Partable all steel 35mm slide file. Stare 150 2x2 glass slides ar 300 2x2 card-baard slides. Includes index card, and numbered strips for quick, easy identi-fication. Metal handle and 2 snap catch-es. Finished in plotinum gray enamel. F-161 Net 1.69

Here is a lightweight and compact 35 MM viewer that campores with models selling far mare than twice the pricel Precisian made . . simple, faalpraaf canstructian. Use it as a table viewer with the self-cantained 5½" square graund glass screen, ar praject your slides an a light-calared wall ar prajection screen and enjay a 10 sq. ft. picture with the same sharp facus, Magazine halds 36 slides that change with the flick af a lever. Campact steel case with carrying handle measures anly 10" x 7" x 3½" deep. Supplied camplete with standard 100-wat prajection bulb, F3.5 lens, prajection mirrar, view screen, an-aff switch, line card and instructions. Far 105-115 V. AC aperation. Net 19.95 F-276—Shpg. wt., 5 lbs. .Net 19.95



## PAN-HEAD TRIPOD


4.49 • LIGHTWEIGHT — STURDY — LOW COST
Five section, chrame plated, brass tripod. Extends to 45" telescapes down to 12½". Weighs only 20 azs. Tensian adjust screws far each leg. Camera retaining screw an panhead rotates — makes turning camera unnecessary. Pans and tilts with a single mation. Handle is detachable. Pans 360° — tilts 145°. A "must" to take the "iiggle" out of those special shats. Shpg. wt., 2½ lbs.

Net 4.49

## PRECISION 8mm MOVIE LENSES

FASTEST! FINEST! LOWEST PRICES!

1½" f1.4 Telephoto • 6.5mm f1.4 Wide Angle 1½" f1.9 Telephoto • 6.5mm f1.9 Wide Angle





11/2" f1.4 Telephoto: Fastest available lens far 8mm. Exceptional speed—extreme sharpness. Facuses 31/s ft. ta infinity. Click staps f1.4 ta f16. 3x magnification. 5 element lens. Facusing maunt. Shpg. wt., 1 lb.
F-299—List 44.95
Net 16.59

F-299—List 44.95
6.5mm f1.4 Wide Angle: Extreme wide angle. Cavers 4x area of narmal lens. Extremely fast—far paorest light canditians. Click staps f1.4 ta f16.8 element retracus farmula. Facusing maunt. Shpg. wt., 1 lb.
F-300—List 49.95
2.00 Dawn
Net 22.95
11/2" f1.9 Telephote: Fast, sharp, fully coated. Click stops f1.9 ta f16. Focuses 3.5 ft. ta infinity. 3x magnification. 5 element systems, Focusing maunt. Shpg. wt., 1 lb.
F-302—List 38.95
Net 12.95

F1.4 Matched Set: The finest available. Both f1.4 Telephota and f1.4 Wide Angle in a deluxe, jewel type, presentation case. Shpp. wt., 2 lbs.
F-304—List 89.95

2.00 Dawn

Net 35.59
F1.9 Matched Set: The 'Best Buy'' passible far the mavie camera fanl Both f1.9 Telephota and f1.9 Wide Angle in deluxe, jewel type presentation case. Shpp.

AVAILABLE ON LAFAYETTE'S NEW EASY PAY TERMS - SEE PAGE 44

## Achromatic BARLOW LENS

- Doubles Your Telescope's Powerl improves Definition! Provides Greater Eye Relief! Greater Illumination—Wider Field!



#### ACCESSORY EYEPIECES

 Highly Corrected Hard Coated • 24.5 mm O.D.
• Finest Quality

Manufactured to extremely close tolerances by one of world's leading manufacturers of optical accessories. These oculors allow you to obtain maximum performance from your refractor or reflector. You can determine the magnification possible by dividing the focal length of the eyepiece into the focal length of the telescope objective lens. All are hard coated. The 24.5 mm 0.D., (.97") fits most telescopes currently available.

Description	Net, ea.
Orthoscopic	8.95
	5.45
	5.45
	5.75

## Stock # Description Net, ea.

	Kellner-Achromatic Huygenian	9.45	ı
F-397	22 mm Kellner	7.95	ı
-398	Sunglass—for above oculars	1.25	ı

F-399 Moonglass-for above oculars 1.25

· Coated Optics

## 30x, 60mm SPOTTING SCOPE

Binocular Type • Complete With Fecus Leather Case

A prismatic telescope using the same fine features as expensive binoculars! Field of view is 85 feet at 1000 96.1 Both front and rear optics are coated. High relative brilliance due to great 60mm objective lens. Exceptionally small and light—weighs only 1½ lbs. including metal tripod! The perfect companion for shooting—hunting—viewing—naturalists—and hobbylsts. Comes equipped with 11½" tripod and mount and zippered leather carrying case for both scope and tripod. Shpg. wt., 2½ lbs.

#### "MAGNI-SCOPE" PROJECTION MISCROSCOPE

Produced for the Science Minded-by

- TRUE PROFESSIONAL
   INSTRUMENTS IN ONE.
   ACCEPTS SOCIETY SIZE OBJECTIVES
   AND EYE PIECES
   SIMPLE—COMPACT—INEXPENSIVE



Profesionally designed and produced to conform to the standards set by Lofayette's Instrument Division. The 'Magni-Scape'' is not merely a converted miscroscape—nor a converted projector. It is a true micro-projector instantly adaptable to use as an extremely fine miscroscape capable of delivering high magnification (up to 1500x) and excellent definition. The 'Magni-Scape' will project every type of prepared slide. Heat absorbing filter glasses also permit the projection of living material. These filters, built into the condensing system, project valuable slides from damage by heat. The highly efficient 100 wott light source—coupled with a first class optical train, assures projected images of exceptional clarity and brightness. The highly corrected optics permit extremes of magnification without distartion or color abertations. The 'Magni-Scape' has also been designed for use as a shadow graph, making it invaluable in industrial and testing laborataries. All standard (society size) miscroscape objectives and eyepieces are standard and can be used in the 'Magni-Scape'. Hence the 'Magni-Scape' offers all advantages of the most expensive microscopes. Magnifications up to 1500x are possible by using a 15x eyepiece and 100x all immersion objective. Polarizing filters and an iris diaphragm are maunted substage for light cantrol.

The 'Magni-Scape' finned housing and the large stable base are cost aluminum allay, finished in black crackle enamel. The focusing mechanism is a doveduiled chromed bross slide with a spring-loaded micro-drive for fine facus. Stage is 90mm by 80mm. Supplied complete with a 10x eyepiece, 10x objective, 100 wat projection lamp, instructions and a fitted hardwad carrying case. Shpa, wt. 101/18.

## afayette's DIRECT IMPORTS

Make These Prices Possible

## THE NEW Professionally Designed and Produced

2.4" EQUATORIAL REFRACTOR

• 600-mm. Focal Length

• 62-mm. Objective

- Micromotion adjustments on both axes

with eyepieces included 200x\* by use of optional eyepiece

Only 5.00 Down

st in a long line of Lafayette refractors at reasonable prices. The unusual value of the ris is recognizable in the following specifications. Objective: Fraunhofer-type achromat, I coated, 62.5 mm., 800-mm. focal length. Collects about 75 times as much light as the de eye, resolving power 2 seconds, faintest discernible star 10.7 magnitude. All eyepieces hard-coated Huygenlans. Eyepieces included: 160x (5-mm), 88x (9-mm), 40x (20-mm), 22x (35-mm).

Finder scope is 6x, 20 mm. Equatorial mount with slow-motion controls in right ascension and declination. Tripod head with latitude adjustment. Clamp lever for declination and inclination. Accessories include sunglass, star diagonal, erecting prism, sun projection screen, field tripod, and wooden case. Magnifications of 160x, 88x, and 40x. Rack-and-pinion focusing. Heavy plating used throughout to prevent rusting. Shipping wt. 30 lbs.

F342WX

F391 \*200x obtainable by use of optional 4-mm Orthoscopic Eyepiece

## Galactic 3" Equatorial Refractor RESEARCH QUALITY

● 910mm FOCAL LENGTH ● 76.2mm CLEAR APERTURE ● MICROMOTION CONTROLS FOR DECLINATION AND RIGHT ASCENSION ● RESOLVING POWER 1.6 ■ 1.6" FINDER SCOPE — 500 MM. FOCAL LENGTH

e 1.6" FINDER SCOPE — 500 MM. FOCAL LENGTH

Truly superior auality—advanced design—aptically and mechanically suitable for serious research. The objective lens is a 79mm, hard coated, oir spaced Fraunhafer achromat with a clear operiure of 76.2mm (3"). Focal length 910 mm, focal ratio f/12, resolving power 1.6". Seven coated eyepieces provide magnifications of 227X, 152X, 101X, 73X, 45X, 35X plus 25X through the viewfinder. Facusing by means of micro-precise rack and pinion drive. The viewfinder scape has a 42mm (1.6 in. clear aperture) objective—500mm focal length-rock and pinion facusing—and will accommodate various eyepieces. The equatorial mount is oversized—insuring stability and smooth action. Finely calibrated hour and declination circles for rapid finding and setting. Micro-motion and rapid motion controls are provided for both declination and right ascension. Micro-motion controls are fitted with flexible shafts and oversized knobs for ease of positioning while viewing. Body tube of white enameled aluminum for maximum strength with minimum weight. Accessories include three sunglasses, moonglass, two star diagonals, sun diagonal, erecting prism, sun projecting screen, extensible field tripod, chain brace, accessory shelf and wooden cobinet. Shpg. wt., 60 lbs.

5.00 Down

Net 189.00

Sale! 18900

Regular Value

\$300.00

#### PORTABLE FIELD MICROSCOPE



20x — 40x — 80x
 POCKET SIZE—
FOR FIELD OR LAB
 ACHROMATIC—
COATED LENSES

5.95

of finest precision optical imports Lafayette has ever ed. Unparalled far "rackhounds" praspectars, induscoin and stamp callectars, students and habbyists inensable for examination of gross and apoque subjects, by polished—finely machined chromium plated brass, mount and tripod legs. Sliding drow tube permits ining an objects from flat surface to 1½" high. Ideal inspecting large specimens—small parts—surfaces of places. Size callopsed is only 4½"—fully extended less tripod. Includes soft leather zipper and tripod Perfect partability. Shpg. wt., 1 lb.

Net 5.95

## NEW! GOLF RANGE FINDER



- PRECISION 6X LENS
- **MEASURES FROM 40** TO 250 YARDS
- HANDY POCKET SIZE
- WITH LEATHER CARRYING CASE



This exciting new Range-Finder is bound to prove an invaluable addition to your Galfing Equipment. Featuring a precision 6X lens capable of measuring from 40 to 250 yards, this handy packet size instrument enables the galfer by means of a simple facusing adjustment to easily compute the distance to the next hale. Guess work is completely eliminated and choosing the correct club is greatly simplified. Supplied with suede leather carrying case and simple instructions. Shap, wt., ½ lb. F-427 Golf Range Finder

## 14" TRANSPARENT CELESTIAL GLOBE



Basic Aid for Students and Teachers of Astronomy Aeronautics • Astronautics. Navigators

FIRST TIME UNDER \$100.00 AVAILABLE ONLY THROUGH LAFAYETTE IN THE UNITED STATES, CANADA & MEXICO

Besigned by Br. M. Hirose and Mr. Manabe of the Tokyo Astronomical Observatory

- \* Adjustable Satellite Orbits
- ★ Satellites Travel around Earth Automatically
- ★ Adjustable Sun and Moon
- \* Adjustable Lunar orbital inclination
- \* 80 Constellations—including all stars of 1st, 2nd, 3rd and 4th Magnitude.
- \* Similar devices used by the Navy-Air Forceand Marines.

59.50

A true "mechanical universe." Designed for and dedicated to those who recognize the challenge and adventure that lie on the frontiers of space. The concept of the celestial sphere is the most convenient means of illustrating and discussing the common motions of the stors and the individual motions of the members of the solar system. It offers an easily used and easily understood working model of our universe. An invaluable oid in visualizing and identifying the stars and constellations and their relationship to each other, to terrestrial positions and to invaluable oid in visualizing and identifying the stars and constellations and their relationship to each other, to terrestrial positions and to invaluable oid in visualizing and identifying the stars and constellations on the times and dotes. Permits comprehensive explorations in time and space beyond the earth atmosphere. The lafayette celestial sphere may be defined as a sphere of infinite radius with its center located at the center of the earth. This system of geocentric coordinates will illustrate defined as a sphere of infinite radius with its center of any day. All systems of astronomical spherical coordinates, such as this the true geographic zeniths of the sun and stors at any time on any day. All systems of astronomical spherical coordinates, such as this the true geographic zeniths of the sun on stors at any time on any day. All systems of astronomical spherical coordinates, such as this the true geographic zeniths of the sun on stors at any time on any day. All systems of astronomical spherical coordinates, such as this stars, established the server beat of astronomical spheric contribution of the stors, established and stars are such as the server of the sun of astronomical spheric contributions of spherical coordinates, such as the stars, established the sun of the store of the sun

## COMPARE!


## CAN'T BEAT LAFAYETTES'

1200X "RESEARCHER"

FULLY CONTROLLED, INTEGRAL MECHANICAL MOVEABLE STAGE

MAGNIFICATION RANGE 25X - 1200X • 4 OBJECTIVES, 4 EYEPIECES, FULL RANGE FINE FOCUS

ADJUSTMENT

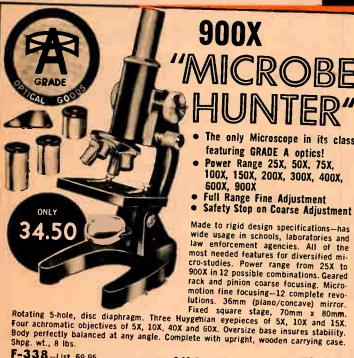

900X

The only Microscope in its class

featuring GRADE A optics!

Power Range 25X, 50X, 75X, 100X, 150X, 200X, 300X, 400X, 600X, 900X

Full Range Fine Adjustment

Safety Stop on Coarse Adjustment

F-338-List 69.95



- NEW—TWIN LENS "BI-OCULAR" TURRETI
   BUILT-IN SUB-STAGE MICRO-LITEI

- 600X—400X—300X— 200X—120X—80XI ONLY AT LAFAYETTEI

F- 334

....Net 8.95

LAFAYETTE MICRO-LITE USE WITH ANY MICROSCOPE
 FURNISHES BRIGHT, EVEN LIGHT

# OPTA SCOPE ILLUMINATED UNIVERSAL MICROSCOPE

• Direct measuring reticle • Hig
An extremely versatile, precision microscope for use in laboratories, shop-production, field work wherever inspection or examination under high magnification is required. Adds speed to inspection. High resolving power plus exceptionally efficient illumination factor greatly increases the accuracy of all types of inspection work. Direct measuring reticle, 1 mm divided into 50 parts. Permits estimates down to .0001 inch. Coarse focus by draw tube, chooses gross magnifications of 82X, 90X, 100X and 120X. Fine focus by knurled wheel and helical gear. Facusing experiee corrects far diopter/voriations. Integral light source is a 15 wath 110 v clear bulb. For field use it is interchangeable with abottery operated secondary source. High eye relief, approximately one inch, permits the operator to wear glasses. Accessory stide clips allow the examination of prepared slides while hand holding the Opta-Scope. Experiee and objectives tens are standard size and readily interchangeable for variotions in power. Supplied complete with 15X focusing experiee, 10X, 0.25na objective, blue filter, 110v. spare bulbs and fitted leather carrying case. Shap, wt., 3 !bs.

F-495 2.00 Down. Net 39.50 2.00 Down

44.50



39.50

#### SIMPLEX CYLINDER MICROTOME



## HUNTING WITH THE MICROSCOPE



NEW EDITION Guide for beginners and advanced users of microscopes. How the microscope works. How to prepare and study cultures—set up a microscopic zoo and garden—grow micro organism—perform micro surgery. Profusely illustrated with photographs and drawings. 14 chapters of easy-to-read, highly informative text.

BK-1440

136 PAGES 51/2" x 8"

# FURNISHES BRIGHT, EVEN LIGHT Specially designed for microscope illumination. Provides a bright, evenly lighted field of view. Controlled intensity, by means of focusable condenser lens. Lamp may be raised or lowered to any desired height on its 4½" stanchion. Inclination and elevation ioint permit swinging through 360° in both herizon tal and vertical plane. Fully ediustable for transparent or apaque specimens, direct or indirect illumination. Inque light is necessory. Operate on 110-120 volts AC/DC. Lamp is easily replaced. Self contained witch, cord and plue. Lamp body is 5½" long, stand is 5½" high including base. Shpg. wt., 1 ib. NEW! 30X-70X STERO-SCOPE



• STEREOSCOPIC Binocular Dissecting Microscope

• Wide Field 3-Dimension View

• Two Models to Choose from



STUDENT "STEREO-SCOPE": A 30X stereoscapic binocular microscope—designed primarily for the student and serious habbyist. Includes most of the features of aur "Semi-Pro" model shown on this page. Fixed objective lenses and non-interchangeable eyepieces. All optics are achromatic. Graund' glass stage measures 21/8" x 2-13/16". Overall height 73/4". Complete with fitted waden carrying case. Shpg. wt., 3 lbs.

#### **NEW! 500X "MICRO-MECH" MICROSCOPE** Tested and selected for consistent quality

BUILT IN MECHANICAL STAGE!

• 100X-200X-300X-500X • QUADRUPLE REVOLVING TURRET

The latest in microscopes for the student—hobbyist—or budding scientist. Featuring a built-in, micro-drive, mechanical stage. Simplifies the positioning of slide under view. Permits the micro movement necessary to properly examine micro subjects. Simplifies use—promotes learning through ease of operation. Quadruple turret holds four achromatic objective lenses giving magnifications of 100X, 200X, 300X, and 500X. Dual knob, rack and pinion focus. Adjustable substage mirrar. Complete with waoden carrying case and slides. Shpg. wt., 4½ lbs.

5.95



#### MICROSCOPE STAGE MICROMETER

. GRADUATED TO 1/100 MM

GRADUATED TO 1/100 mm

Measures micrascope field sizes—used far calibrating and standardizing micrometer eyepieces. Fine polished glass slide, 75 mm x 25 mm, has a 1.0 mm scale with 100 graduations (0.01 mm) ruled directly on it. Each fifth and tenth calibration is a larger line to aid in measurement. The lines are stained black and protected by a cover glass. Complete in hinged case. Shpg. wt., 6 azs.

F-4488

Net 3.95

Net 3.95

#### PREPARED MICRO SLIDES



SPECIALLY SELECTED MICRO-SUBJECTS.

ADD TO THE ENJOYMENT OF YOUR MICROSCOPE.

PROFESSIONALLY PREPARED.

Specially selected slides of universal interest. Carefully prepared—cleaned, dissected, embolmed, stained, mounted and covered. Slides are professional size. Set includes 12 prepared slides and slotted, covered box for filing and storing. Shpg. wt., 8 ozs.

Stock No. Description	Net ea.
F-123—Parts of Insects	1.39
F-124—Spiders and Disease Carriers	1.39
F-125—Tiny Creatures found around House	1.39
F-126—Sea Life	1.39
*F-128—Structure of Bload	
F-130-Life cycle of Insects	
F-131—Bacteria	
F-132—Pand, Marsh and Sea Life, Plankto	n 1.59
F-134-Micro-Animals	
F-261—Textile Fibres	
F-262-Starch Grains-silver stained	
F-263—Structure of Leaves	
F-264—Plant Reproduction	
F-266—Honey Bee Organs	
F-135-Micro-Organisms	1.29
*F-136—Substance of Cells	89
*—Set of 6 slides	
DISSECTING INICTOLINES	IT CET

#### DISSECTING INSTRUMENT SET

. SURGICAL QUALITY



Carefully chosen kit of most often used dissecting instruments in bialogy, botany, zoology, anatomy. All of the instruments are high quality. All metal parts plated on polished. Scalpels are of properly tempered, nickel plated steel. Dissecting probes have adjustable chucks and replaceable needles. Kit contains the following 14 pieces: Scalpel—all metal—1½" fine tip blade. Scalpel—all metal—1½" fine tip blade. Scalpel—all metal—1½" half blunt blade, Spatula—2" x¾" blade. Dissecting needle, chuck type, curved. Dissecting needle, chuck type, straight. Dissecting forceps, medium point, straight. Dissecting forceps, medium point, straight. Dissecting forceps, medium point, curved. Probe with eye, 6" long. Blow pipe, 5½", 1.D. 3mm to 1 mm. Small magnifier. Dissecting sissors, sharp points. Dissecting scissors, sharp points. Dissecting scies.

wt., 1½ bs.

F-450

Net 5.49

Same fine quality as F-450 Contains 2 scolpels, spatula, 2 dissecting needles, 2 dissecting forceps, blowpipe, magnifier, scissors, pins. Smaller set contains only the essentials needed for general dissecting work. Instruments exactly as described in F-450, Complete with fitted wooden case. Shpg. wt., 1 lb.

F-451

Net 3.79

F-451

**NEW** "Micro-Lab"

#### COMPLETE HOME LABORATORY ALL THE MOST NEEDED ACCESSORIES

THE MOST NEEDED ACCESSORIES

A carefully preselected assortment of the most often used lab items for biology, botany, anatamy, zoology, microscopy, etc. Perfectly complements the many inexpensive microscopes already in use. The instruments and accessories are of professional quality. The cabinet will accommodate any microscope of no more than 8½"x5"x3" overall (such as our F-334 "BI-OCULAR" and F-357 "Micro-Mach" and contains the following accessories. 15 slides, slide labels; slide covers, vial of balsam, dissecting scissors, probe, scalpel, tweezers, spatula, applicator rod, eyedropper, magnifier, 5 test tubes with stoppers, 6 laboratory jars, alcohol burner, polishing cloth. All in fitted drawers. Shpg. wt., 7½ lbs.

LABORATORY MAGNET SET



Page 39

3.95

## SERVICEMEN AND DEALERS! LOOK AT THESE PRICES!

LAFAYETTE COMPLETELY WIRED TEST EQUIPMENT

SENSATIONAL VALUES AT LESS THAN



20,000 OHM PER VOLT MULTITESTER

- 20,000 OHMS PER VOLT DC SENSITIVITY
- 10,000 OHMS PER VOLT AC SENSITIVITY
- 40 MICROAMPERE 3" D'ARSONVAL METER

• HIGH INPUT

MOVEMENT

HIGH INPUT

RESISTANCE
ON ALL DC

A RANGES

Note the control of the con





WORK IS

20,000 OHMS PER VOLT DC
 10,000 OHMS PER VOLT AC
 10,000 OHMS PER VOLT AC
 11.95

e semi-kit is a new concept in test equipment kits. All a important or difficult parts are already mounted. All at remains to be done is to mount and wire in a few loll parts — a job to simple you'll finish hefare you alize it, and best of alt, you'll have one of the finest got sensitivity multitesters an the market. When used in circuit, the high input resistance on all DC and AC and instructions and bottery. Shop, wt. 3 ibs.

TK-10 KIT

TWO INVESTMENT OF THE STATE OF



#### A LAFAYETTE SPECIAL TUBE TESTER!

COMPLETELY WIRED - NOT A KIT MOST ADVANCED ENGINEERING TO FIT



#### FAMOUS RCA VOLTOHMYST IN KIT FORM



29.95!

49.95 Wired

ONLY

BURNOUT-PROOF!
 28 RANGES

- FAMED WY-77E VOLTOHMYST YTYM.
   ± 3% ACCURACY ON THE

• ± 3% ACCURACY ON DC • RESPONSE ± 5% 40 CPS 1• 5 MC. • DC INPUT 11 MEG.

e RESPONSE ± 5% 46 CPS to 5 MC.

• DC INPUT 11 MEG.

This new kit makes possible substantial savings in a high quality vacuum-tube valtimeter. Its 28 ranges include 7 DC voltages: 0.1.5, 5, 15, 50, 150, 500, 1500, with ± 3% of full scale accuracy and input resistance of 11 megahins; 7 rms AC voltages: 0.1.5, 5, 15, 50, 150, 500, 1500, with ± 5% of full scale accuracy; 7 peak-to-peak AC valtages: 0.4, 14, 40, 140, 400, 1400, 4000 volts, with 5% occuracy; 7 overlapping ohms reanges from 0.2 ohms to 1000 megahins with center-scale values of 10, 100, 1000, 10K, 10K, 10K, 1 meg. and 10 meg. ohms. Other important features include zero-center for discriminator alignment; frequency respense of 40 cps to 5 mc. flat to within ± 5% on the 1.5 to 15 volt rms and 4 to 40 volt p-to-pranges; 1% deposited-corbon resistans; meter electron-celly preceded against burnout and ohms ranges fused; cobles can be stared in sleeve an handle; meter scales color coded to match range switch; shielded by metal case; and etched front-panel lettering. Tubes are 6AL5 and 12AU7. Pewer requirement is 5 watts at 105-125 v., 50-60 cps atched front-panel lettering. Tubes are 6AL5 and 12AU7. Pewer requirement is 5 watts at 105-125 v., 50-60 cps AC and V9035 battery, Supplied camplete with DC and AC/ohms prabes and cables and ground leads, battery, and instruction book. Shpp. wt., 5% fbs.

TE-141 RCA W-77E(K) KIT 2.00 Down Net 29.95

WV-77E Same, completely wired and factory-calibrated 11-141 2.00 Down Net 49.95

"FREE POINT" ELEMENT SELECTOR SWITCH-ING: Newly designed, it reduces possibility of absolescence to a minimum because any pin may be used as a filament pin and voltage applied between it and any other pin, or even the "Top cap."
Tubes with tapped filaments or with filaments terminating in more than 1 pin are truly tested.
MULTIPURPOSE TUBES: Special isolating circuit allow each section of multi-purpose tubes to be tested individually as if it were in a separate envelope.

SHORTS AND LEAKAGES: Supersensitive method checks shorts and leokages up to 5 megahm between any and ALL elements; continuity between various sections individually indicated.

various sections individually indicated.

SIMPLICITY: Fast simple operation. The 4 pasition fast oction snap switches are all numbered in exact accord with RMA standards. Thus when testing element terminating in pin No. 7 of a tube —you use button No. 7. You can't insert a tube in the wrang socket—there's one far each type of tube base.

MODEL TD-SS—complete wiath carrying case and instructions, 2.00 Down 26.95

SIZE: A practical size to carry with you as well as for use in the shop—only 8½ x 6% x 2½" deep. Shpg. Wt. 5 lbs.



Wew! MINIATURE **POCKET MULTITESTER** ONLY 17.5

- 20,000  $\Omega/v$  DC SENSITIVITY 10,000  $\Omega/v$  AC SENSITIVITY
- . 1% DESISTORS
- . WEIGHS ONLY 10 oz.
- 38 µA MOVEMENT 23 RANGES
- . COMPLETELY WIRED

Has 23 ranges at the unusually high sensitivities of 20;000 ahms per valt DC, 10,000 ahms per valt AC: DC Valts, 0-5-25-100-500-1000; AC Valts, 0-5-25-100-500-1000 OHMS; D-6 K-600K-6 Meg-60 Meg; DC MILLIAMPERES, 0-05 [50 microamps] -5-50-500; DECIBELS, -20 ta +64



#### NEW! 20,000 OHMS PER DVOLT MULTITESTER

20,000 OHMS PER VOLT DC 10,000 OHMS PER VOLT AC 40 A MOVEMENT

1%, RESISTORS 17.95

A new high-quality, law-priced multitester. Its light weight makes it a perfect portable instrument for technicians, servicemen, etc. Rugged design withstands hard use. Features large easy-ta-read meter and sensitive 40 microamp meter movement. 1% tolerance resistors pravide extreme accuracy of measurements. Housed in rugged bakelite case. Single knab selector and clearly marked positions permit easy operation. Recessed zera-ohms knab adjustment pravided. Features sensitivity of 20,000 ohms/valt DC, and 10,000 ohms/valt AC, Ranges—DC valts: 0-0.6, 0-6, 0-30, 0-120, 0-600, 0-1200, 0-3000, 0-6000 velts. AC volts: 0-6, 0-30, 0-120, 0-600, 0-1200 valts. Resistance: RX1, RX100, RX1K, RX10K, DC current: 0-0.06, 0-6, 0-60, 0-000 ma. Decibels: -20 to + 17 (0 db - 0.774 V). Capacity: 0-120, 0-600, 0-1200 volts.

Complete with color-coded heavy duty test probes and

## **EDGE-WISE PANEL METERS**



• 2% FULL SCALE ACCURACY

> PRECISION D'ARSONVAL MOVEMENTS

. FRONT PANEL AREA ONLY

Precision D'Arsonvol meters with 2% or better full scale accuracy. Front panel dimension is 3½ x 1". Overall depth is 3½" behind panel including terminals. Zera adjust screw. Shpg. wt., % 1bs.

VU METER—Calibrated and damped in accordance with standard VU meter prætite. Upper scale reads—20 to 1–3 VU. Lower scale reads 0-100% modulation. Accurate to ±0.5 VU from 30-15,000 cps.

TM-23

O-150 AC VOLTMETER—Full-wave bridge rectifier type. 1000 ohms per valt. 5 volts per divisian, linear scale. TM-22

O-1 DC MILLIAMMETER—CALIBRATED from 0-1 ma in 0.02 ma. divisions. Block scale, red painter.

TM-21

Net 5.69

## **NEW! LAFAYETTE PANEL METERS**

eHIGH QUALITY D'ARSONVAL MOVEMENTS • ACCURACY 2% OF FULL SCALE BAKELITE CASES • JEWELLED BEARINGS
UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUALITY. High Quality, precision-built meters with better
than 2% of full scale accuracy. Screw terminals with palarity on DC Models clearly marked. Zero adjustment screw on front of panet.

SQUARE PANEL METERS

3½" square meters with overall depth of 1-11/16", including terminals. Requires 2-9/16" diameter mounting
hale, 4 threaded maunting studs in corners. Shpg. wt.,
1 lb.

INHIMINATED SCALE VIL METER

1 lb.

ILLUMINATED SCALE VU METER

CLEAR PLASTIC FRONT METER — Standard 3900 ohm

"8" scale volume indicator caliorated and damped in accardance with standard VU meter proctice. Upper scale reads 0.100% modulation, lower scale reads -20 to +3 VU [0 VU corresponds to 100%] Accurate to ±0.2 VU from 35.1000 cps. ±0.5 VU from 30.15,000 cps. With suddenly applied sine wave signal, meter will reach 99% of correct reading is 1 to 1/3 %. A roat-mean-square instrument with full wave bridge rectifie. Includes built-in 6.8 volt bulb. Complete with instructions.

TM-80

Net 7.50

Net 7.50

O-50 DC MICROAMMETER
0.50 DC MICROAMMETER — Highly domped, sensitive movement, calibrated in 50 one-microamp linear scale divisions. Cushioned ceramic bumpers protect pointer against overtravel and damage with moderate overlaads.

Net 7,50

O-1 DC MILLIAMETER

O-1 DC MILLIAMETER

O-2 MILLIAMETER

Sensitive, quick-acting basic movement. Linear calibrations in .02 ma. divisians. Black scale, red pointer.

TM-60

0-150 AC VOLTMETER
0-150 AC VOLTMETER — Full-wove bridge rectifier type.
1000 alms per volt. With precision carbon-film multiplier
resistor. 5 valts per division, linear scale. Net 3.95

A brand new, economical meter rectifier of exceptionally linear characteristics. This full wove rectifier is specially designed as a universal replacement for all modern multimeters, such as Lafayette's miniature V.O.M.'s. Simple to install, maunts with single screw. Lang terminals facilitate easy cannection.

RE-22

Not .45

VU METER

VU METER

VU METER

VU METER — Valume level indicator, calibrated in standard — 20 to + 3 VU and 0-100% ronges. Uses precision carbon film multiplier resister and full wave rectifier. Damped in accordance with standard VU meter requirements. Reference level 1 mw in 600 ahm line. 10,000 ohms internal resistance. "0" VU is 1.225 valts sine wave AC across meter cannected to 600 ahm source with 600 ahm lood. May be used with T-pad altenuator. 0-100% scale used to indicate percent use of transmitter output.

TM-10

Next 400.



DC MILLIAMMETERS Net 3.75 Net 3.75 Net 3.75 Net 3.75











NEW! MINIATURE FM & AM TUNING METER

• GALVANOMETER MOVEMENT • 50 μA SENSITIVITY • FRONT PANEL AREA ONLY % x ¾"

Miniature FM and AM tuning meters can be easily Installed an any tuners. The remorkable sensitivity enables you to tune in stations with surprising ease. Calvanometer movement of the indicator assures complete accuracy.

Despite its miniature size, the tuning meter is ruggedly

FM TUNING METER
FM TUNING METER. Can be connected between radio detector and Af amplifier. The indicator will rest in the center when station is tuned in.

Net 2.95


MA TUNING METER. Can be connected into the second if stope of Am or transister radio. Oroducted scale with maximum deflection of pointer indicating station being tuned in.

7M-12



Page 40

## **Advanced Engineering • Lifetime Guarantee**

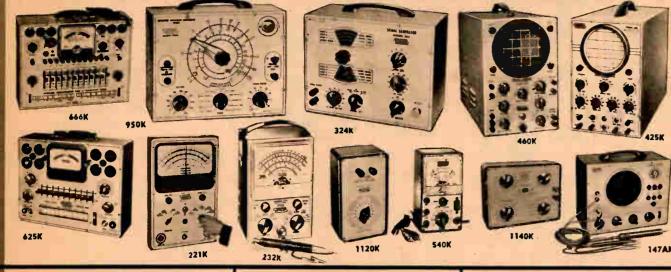

#### NEW! MODEL 666K DYNAMIC CONDUCTANCE TUBE AND TRANSISTOR TESTER

An ideal tube tester for calor and monachrome TV servicing. Tests all receiving tubes, including 4, 5, 6, 7-pin, octal, loctal, miniature 7 and 9-pin, sub-miniature, 5, 6, 7-pin (in-line base) and 8-pin (circular base) receiving tubes, transmitting and special-purpose tubes, VR, cold-cathade rectifiers, magic eye and ballast tubes. Tests color and black-ond-white TV picture tubes with accessary adaptor. Measures transistor collector current and shows current amplification factar. Individual test of multi-section tubes. Measures Cp. Cm and also leokage in ohms. 4½" 200 µa D'Arsanval meter movement, in clear luctite case; For 105-130 valts, AC 50/60 cps. 12" x 15" x 4½"," Shag, wt., 18 lbs.
TE-151WX Kit 5.00 Down Net 69.95
Model 666. As above, but factory wired and tested.
TE-152WX 500 Down Net 109.95

Model 666. As above, but factory wired and tested.

TE-152WX 5.00 Down Net 109.95

MODEL 625K TUBE TESTER

Cathode Canductance type of tube tester features 10 individual level-actian switches for testing each tube
element. Tests all std. tubes including 9-pin miniature,
VR, magic eye and pilot bulbs. Provides knack-out for
addition of new sacket. Illuminated rall' chart gives
instant test setting. Provides 2 grid-cap cannectians. Tests
sharts and apen elements. Protective aver-load bulb alo
acts as fuse, 4½" meter. All camponents and instruction
manual supplied complete. For 115V 60 cycles. 12½ x
9½ x 4¼". Shpg. wt., 12 lbs.

TE-153 Kit 2,00 Down Net 34.95
Model 625. As above, but factory wired and tested.

TE-155 Net 1. Id (cover) for 625K or 625 Shpg. vt., 3 lbs.
TE-155 Net 1. 17 lbs.
TE-156 Kit 7.00 Down Net 44.95
Model 625CK. Same as 625K but with Counter Display
Case Shoa. vt., 17 lbs.
TE-156 Kit 7.00 Down Net 44.95
Model 625C. As above, but factory wired and tested.

#### MODEL CRA PICTURE TUBE ADAPTER

Model CRA. Adapts #625 and #666 or similar Tube
Testers for checking all sizes of TV picture subes. Measures cathode emission; tests for filament continuity;
shorts between elements. Complete with standard 12-join
socket, octal plug-in connector and 4-ft. cable to permit
testing tube without removal from set. Shops. wt., 2 lbs.
Net 4.50.

#### MODEL 950K R.C.

MODEL 950K R.C.

BRIDGE & R-C-L COMPARATOR
Latest bridge-type professional instrument featuring the
valuable Comparator Range for measuring unknown capacitance, resistance and inductance with a complementary
companent as a standard. Transformer operated assures
safe operation. Direct scale on panel reads 0.5 ohms —
500 megs resistance (4 ranges), 10 mmfd — 5000 mfd
capacitance (4 ranges), and power factor. Kit includes
precision collibrating resistar. Unique camparator range
has ratia from 0.05 to 20 (400 to 1). Leokage testing of
all capacitors at rated dc working valtage with internal
(variable) 0.500 vdc source. Electron-ray tube as both
bridge balance and capacitor indicator. Attractive, durable
case, neat easy-to-read characters. Size: 8" x 10" x 4¾".
Shpg. wt., 8 lbs.
TE-214 Kit. 2.00 Down Net 19.95
Model 950. As above, but foctory wired and tested.

4 Kit 2.00 Down Net 19.95
950, As above, but factory wired and tested.
5 2.00 Down Net 29.95

#### **SUPERIOR TW-11** TUBE TESTER



46.55

Tests all tubes including 4, 5, 6, 7, octal, lock-in, peanut, bantam, hearing aid, Thyratron, miniature, sub-miniature, noval, sub-miniat, proximity fuse type, etc. Will test for "shorts" and "leakagee" up to 5 megohus. Uses the new self-cleaning lever action switches for individual element testing. The user can instantly identify which element is might be placed in the place of the property of

.. 2.00 Dow TE-506

SUPERIOR MODEL 70 UTILITY TESTER



15.53

#### MODEL 232K PEAK-TO-PEAK VACUUM TUBE VOLTMETER

TE-176 Kit 2.00 Down Net
Model 232. As above, but factory wired and tested
TE-177 2.00 Down Net ..Net 49.95

#### MODEL 221K VTVM

A precision VTVM for fast aperation and lifetime dependable service. 4½" meter, can't byrn aut circuit. New zero center. Totals 15 ranges— AC/DC volts: 0.5-10.100.500.1000 v. (30,000 volts and 200 MC with HVP.1 and P.75 probes). Ohms: 0-1K ahms, 0-1.10-100.1000 megahm. D8: —20 to +55 in 5 ranges. New stable dauble triode bolanced bridge circuit — 25 megs DC input impedance. 115v., 60 cycle. 9-1/16 x 6 x 5". Includes all parts and tubes and instructions. Shpg. wt., 10 lbs.

TE-180 Kit TE-181

#### MODEL 324K RF SIGNAL GENERATOR

For IF-RF olignment, signal tracing and trouble-shooting of TV, FM, AM sets all an fundamentals; marker generator for alignment of new h-f and alder 1-f TV IF's. Ronge: 150 kc-145 mc on fundamental: 111-435 mc on calibrated hormonics — ± 1.5% frequency accuracy. Internal 400 cps sine-wave modulation variable from 0-50%. Calpitts oscillator. Variable gain external modulation amplifier; Turret-mounted, slug-tuned cails. RF autput 100,000 microvalts. AF autput up to 10 volts. Output impedance is 50 ohms. For 105-125V. AC 50/60 cps. Size: 8 x 10 x 43/x". Shog. wt., 10 lbs.

TE-242 KH

TE-242 Kit 2.00 Down Net 26.95
Model 324. As above, but factory wired and tested.
TE-243 2,00 Down Net 39.95

#### MODEL 460K NEW WIDE BAND SCOPE

Excellent Lab precision scope featuring Push-pull direct caupled vertical amplifier with high sensitivity. 25 mv/ in. Response flat from DC to 4.5 mc, useful to 10 Mc, ideal for reproduction of 3.58 mc color TV sync, burst, 4 step freq.-compensated attenuator in both AC, DC positions. Also internal voltope calibration. Automatic sync limiter and amplifier. 2X-full screen horizontal positioning. Sweep-freq: 10 to 100 Kcps with external capacition (30 and 7875 cps). Variably III graphed 5" screen. Very hi-input impedance. Complete with all companents and instructions for easy assembly. 13 x 8½ x 16". For 105-125 vac, 50-60 cycles. Shep, wt., 30 lbs.

#### SUPERIOR MODEL TV-50A GENOMETER



GENERATORS IN ONE



#### MODEL 425K 5" OSCILLOSCOPE

New, professional oscilloscope kit, for precise servicing of TV, FM and AM. Push-pull deflection and .05 to .1 Rms volt/Inch sensitivity. Response, flat from 5 cps to 500 kc, useful to 2.5 mc. Wide range sweep from 15 to 75,000 cps. Externol sync input Direct connection to CRT plotes. 6.3V line test signal output. I mee input impedance. Intensity modulation. Tubes: 3-65N7, 2-615, 2-573, 58P1 CRT. Far 110-120V, 60 cycles AC. All components supplied with partable steel cose, schematic and pictorial diagrams. Size 8½ x 17 x 13". Shop. wt., 29 lbs.

#### NEW! MODEL 540K UTILITY TESTER

An all-in-ane Multi-Range ac/dc voltmeter, ammeter, ohmmeter, waitmeter and leakage checker. Indispensable in hame repairs of electrical appliances, and in automative trauble-shooting of batteries, generators, distributors, etc. 3½" meter ranges: Valts AC/DC 0-7.5-15-150-300. AC/DC current: 0-15 amps. Ohms 0-100 ohms. Capacitor leakage test. All components and instructions supplied. 3½ x 6½ x 3½". Shpg. wt., 3 lbs.

YE-173 Kit Net 12.95
Model 540. As above, but factory wired and tested.
TE-174 Net 15.95

#### MODEL 1120K RETMA CAPACITANCE SUBSTITUTION BOX

eal equipment for development, designing, servicing ork. Enobles rapid substitution of wide range of RETMA pocitionce values from 0.0001 to 0.22 MFD in an oper-ng circuit to determine value needed for best per-rmance and to find value of bodly damaged or illegible pocitors. Minimum accuracy ± 10%. Uses silver-mica d molded plastic (or sealed in plastic) capacitors, rated prox. 600 valts. Size: 3¾ x 6½ x 3½". Shpg. wt., lbs.

TE-218 Kit New Model 1120. As above, but foctory wired and tested TE-219 New Model 1120.

#### MODEL 1140K SERIES/PARALLEL R-C COMBINATIONS BOX

E-212 Kit Net 13.95 lodel 1140. As above, but factory wired and tested. E-213 2.00 Down Net 19.95

#### MODEL 147AK DELUXE SIGNAL TRACER

A deluxe instrument with unsurpassed testing facilities, engineered for high sensitivity as well as good audio quality. Features high gain RF and low gain audio channels. Both visual and oural monitors. With shielded RF crystal demodulator, valuable noise locator circuit, built in calibrated wattmeter, substitute test speaker, amplifier and output transformer. Output for VTVM or scope. Triode input circuit for extreme low noise. Hum free aperation. Complete with all components and instructions with probes. For 105-125 vac 50/60 cycles. 8 x 10 x 4½" Shog, wt., 11 bs.
TE-216 Kit 2.00 Down Net 24.95 Model 147A. As above, but factory wired and tested. TE-217 2.00 Down Net 39.95



Its built-in ching open ching capaciting cap

#### RCA WO-33A(K) 3" SCOPE KIT

PORTABLE & COMPACT

WIDE GAIN & BANDWIDTH
VERY HIGH VERT. SENSITIVITY ONLY

79.95

129.95 Wired



The new, extremely portable and compact WO-33A 3-Inch Oscilloscope is available as a kit or as a factory-wired instrument. It will handle any black-and-white or color-TV servicing job. With lats of gain and bondwidth, the WO-33A can be used in PA, radia, TV, hi-fi, laboratory, nom radio, broadcast, and industrial applications! Vertical amplifier has two positions. On wide band position, sen itivity is 100 rms mv/in. and bandwidth within 3 db from 5.5 cps to 5.5 Mc. On norrow band position, sensitivity is 3 rms my/in, and bandwidth within 3 db from 20 cps to 150KC. Has external and ± internal sync. Sync range to 4.5 Mc. Sawtooth range from 15 cps to 75Kc. Line sweep can be adjusted 160° phase. Vertical circuit input impedance at la-cap cable input is 10 megahms and 10 micromicrofarads approximately. Complete with direct/lo-cop probe and cable, and instruction booklet. Assembly instruction sheet provided with the kit. Pawer equirement is 50 watt at 105-125 volts, 50/60 cps. Size 61/2×101/4×81/4". Shipping wt., 15 lbs.

TE-137WX KIT 5.00 Down WO-33A Completely wired and foctory tested.
TE-138WX 5.00 Down

#### **NEW! AUTOMATIC CUT-OFF**

MATIC CUT-OFF

Turns Off Hi-Fi System

 Plugs In— No Special Wiring May Be **Used With** Record Changer **Employing Automatic** 

## SPECIAL PRICE 3.45

Automatically shuts off complete Mi-Fi system after last recard has been played. May be used with record changer employing an automatic shut-off. Components are plugged into unit-which in turn plugs into AC power outlet. Provision for automatic or manual operation. Mounts externally at internally. Size 5½ x x 1½...

PACO MODEL V-70 VACUUM TUBE VOLTMETER KIT





7 DC and RMS AC voltage ranges to 1500 volts. 7 peak-ta-peak voltage ranges to 4000 Volts. 7 ahmmeter ranges to 1000 megahms. Special PACE 5" acrylic cased meter. Attractive, easy-reading two color panel. Rugge-finished steel cabinet, size 7½ x 5% x 4½". with all parts and instructions. Shpg. wt., 6 lbs.

... 2.00 Down

Model V-70W, as above, but factory wired.
TE-456 ......Shpg. wt., 8 lbs. 2.00 Down ....Net 47.50
TE-457. AV-1 HF Crystal Probe for above 1 to....Net 5,95 TE-458

#### MODEL C-20 RESISTANCE-

CAPACITY-RATIO BRIDGE KIT

Capacity Ranges from 10 mmld to 2000 mfd. Resistance Ranges from .5 ohms to 200 megahms. Radio test ranges from .05 to 20. Tests leakage of mica, paper, and electrelytic capacitors. In attractive, ripple finished steel cabinet and easy-reading 2 color panel. Dimensions: 7 x 11½ x 5". Complete with all parts and step-by-step instructions.

INSTRUMENTS ARE AVAILABLE ON LAFAYETTE'S NEW EASY PAY TERMS - SEE PAGE 44

#### NEW! DELUXE LOG LOG DUPLEX DECI-TRIG SLIDE RULE

● 25 Scales with 8 Log Log Scales ● 40" Log Log Dec. Fractions Scale ● Extended Range Avoids "Going Off Scale" ● Extra P Scale Simplifies Computations

Extra P Scale Simplifies Computations

This brand new 10" lag tog duplex trig slide rule is built for the most exacting demands and is a truly universal calculating instrument. Contains 25 scales in total. Has 8 log log Scales—40" log log Decimal fraction scale. The need for the troublesome end-forend resetting of the slide is eliminated by the extensions of the C and D scales. Other scale arrangements also allow easier calculation of problems involving the value of trigonometric functions. The twin set of log log scales in four sections each runs from 1.001 to 100,000 and .999 to .00001, thereby enlarging the scale by one scale length each compared with ordinary log log slide rules. Extra features include the P scale which enables easy computations of vector problems involving two sldes of a right triangle. Scales include LL01, LL02, LL03, DF, CF, CIF, CI, C, D, LL3, LL2, and LL1, LL00, L, K, A, B, S, ST, T, C, D, D1, P, and LL0. Complete with instruction book and saddle leather case. Overall length is 14". Shpg. wt., 1½ lbs.

Net 15.95

15.95

#### 10" LOG LOG DUPLEX TRIG SLIDE RULE



10" Log Side Rule: Constructed of specially selected, laminated, non-hygroscopic bamboo. All scales are machine engraved on white plastic in permanently occurate calibrations. Adjusting screws permit varying the tension on the slide. 21 scoles in all including the more frequently used C, D and C1 scoles on both sides of the rule. Evaluates trigonometric, algebraic and exponential problems, LLO and LLOO scales refer to B scale. Alt other scales coordinate and refer to D scale. Scales are L, LL1, DF, CF, C1F, C1, C, D, LL3, LL2, LLO, LLOO, A, B, K, C1, C, D, S, ST and T. Scale characteristics permit multiplication, division, proportion, inverse proportion, reciprocals, cotangents, squares, square roots, cubes, cube roots, logarithms, tangents, sines, Pl factor multiplication and division, powers and roots of numbers less than 1, powers and roots of numbers greater than 1, logarithms to base "e". The most often used slide rule in all basic fields science, engineering, production and economics.

Shpg. wt., 1½ lbs.

F-341 LIST 25.00

Net 10.45



LIST \_6.00

#### 5" POCKET SLIDE RULE

5" Pocket Slide Rule: Convenient pocket sized slide rule of specially selected and treated bamboo. Will not warp, shrink or lengthen under varying atmospheric conditions. A, B, Cl, C, D and K scales engraved on white plostic surface. Reverse side of slide has standard S, L and T scales. The upper, beveled edge of the rule is graduated in m/m to 13 cm. Other edge is divided into 5 inches by 32nds. Only 5-13/16" long over all. Carried easily in any pocket. Shpg. wt., 8 ax.

F-340 LIST 4.00



#### ABBE DRAWING **APPARATUS**

- MICRO-CAMERA LUCIDA . HIGH OPTICAL
  - · EXCEPTIONAL
  - CONVENIENCES

The Abbe type drowing apporatus can be used with any microscope having a body tube diameter of 24 mm (society size). Permits "tracing" of subject as seen in the microfield by superimposing the image on a drowing plane. High aptical quality of the prism and lateral reflecting mirror gives a "projected" image of extreme brightness and clarity. Free of distortion. Calibrated, dove tailed, adjusting slide. Camplete with light and dark filters and fitted waaden case. Shpg. wt., 1 ½ lbs.

F-453

Net 15.95


# 

OPTICAL MICROMETER

- Direct measurements to .005"!
- Meosures Diameters-Radii-Angles


High quality aptical micrometer using a triplet lens system of approximately 7 power. Triplet system affords a wide flat field of view. Extremely accurate reticle of etched glass. Unaffected by changes in temperature and humidity—impervious to ail, solvents and scratches. 0.5 inch. linear scale calibrated to .05 inch. 10 mm scale calibrated to .2 mm. Hole diameters from ½4" to ½6" and from .005" to .05". Thickness scales from ½4" to ½6" and from .005" to .05". Thickness scales from 0 to 90°. Measures instantly—without adjustments. Accurate to edge of 1" field. Adjustable focus. Reticle removable for use as high power magnifier. Infinite uses in lab and industry. Complete with leather case. Shap. wt., 6 az.

8" ADJUSTABLE TRIANGLE



Hendiest device ever! Transparent plastic. Trace any engle from 0 to 90 degrees. Inner row of graduations on arc give angle, outer rew give complementary angle. Has four openings for drawing circles ½", "I and 1½" claim. Tapered holes ¼" epart on two sides to divide any line into equal parts by swinging angle. Useful for cross hatching, architectural staliwey drawings, speeds up letter specing. No protrusions to tear tracing paper. Shop Wt. 6 oz.

4-77. Net 1,98



## **DIRECT VISION PRECISION SPECTROSCOPE**



• 400-800 MILLIMICRON SCALE

 ADJUSTABLE SLIT WIDTH; DRAWTURE SLIT FOCUSING

HORIZONTALLY SPLIT FIELD

A prismatic type, hand-held instrument that has most features of the finest standard laboratory instruments.

The millimicran scale is adjustable for sharp focus and for position (with "lock-in" feature to fix scale with relation to known spectral lines). Highest grade optics yields a broad dispersion field of high intensity obtained from best quality glass dispersing prisms, while excellent lens system resolves the closet spectral lines into 2 distinct lines. By a twist of the collar, a harizontally split field is obtained by which a comparison con be made of two light sources simultaneously. Tubes and collars are constructed of highly polished carrosion proof steel. Equally suited to laboratory or field work, the spectroscope has a wide array of applications: emission spectrumanalysis of light sources; qualitative chemical analysis and metallurgical analysis by emission spectrum qualitative analysis of absorption spectrum on the symbol examining aqueous or other solutions contained in the small test tubes provided. Absorption spectrum analysis has application in many branches of technology—calor and dye chemistry, blood chemistry, clinical medicine, criminalogy. Complete with plush-lined case, shipping wt., 1½ lbs.

5.00 Down

Net 76.50

5.00 Down

Net 76.50

## ABNEY CLINOMETER



The Abney topographic level enables the user to determine ground elevation-measures degrees of slope or inclination-run a level line-etc. Permits pre-liminary surveying with little or no experience. Fine prismatic system. Arc scale is divided into 60 degrees both sides of zera. Vernier scale reads 1 to 10 minutes. Arc swings from 0 to 90 degrees. Particularly useful in laying out drains-retaining walls and fences-driveways-fields-etc. includes leather case and strap.

#### RAIN GAUGE

1.59

Farmers, gardeners, weather habbyists. All need this sturdy, molded plastic rain gauge, precision manufactured to give accurate rainfall records. Unique "chisel" shape permits recording of minute Quantities of precipitation. Exclusive easily-aperated Cumulative Rainfall Indicator. The gauge has large numerals on an easy-to-read scale graduated up to 5½ inches. Scales in black numerals on transparent shell with opaque back for easy readability. With complete instructions for mounting and use, to abtain weather-station accuracy to 1/10th of an inch. Overall length 10½", width 2½". Shpg. wt., 8 ozs.

F-494

Net 1.59

#### TECHNICAL DRAFTING

SET · Center Whee

- Adjustment
- Quality

. A \$15.00 Value



A fine set of imported nickel plated brass instruments priced far below the usual price for this quality. Contains 8/g" self-centering compass, one leg knockle joint with divider, pencil, pen parts and lengthening ber; 8/g" self-centering divider; spring bow divider 4/g", center wheel adjustment with interchangeable needle points; spring bow pencil and spring bow pen, both 4/g with center wheel adjustment and interchangeable needle point; two 5½" ruling pens; extra handle for pen and pencil parts; stradustment fool; tead case and leads; and spare parts tit all in valvet lined snap closing case, Shpg. Wt. 11/z lbs.

UTILITY DRAFTING SET

#### • EXCEPTIONAL VALUE

Mode in Germony of hard rolled, nickel plated brass. All instruments are nested in a fitted, velvet lined case. Contains three side wheel 314" bow instruments — one a divider, one a pencil and one a pen.

—one a divider, one a pen. All have reversible needle point. 51/4" compass with pen and pencil parts—and lengthening bar. 51/4" divider with straightening device. 5" ruling pen. Extra hondle for use with pen ond pencil parts. Capsule with extro leads. Perfect for schools, labs, industriols or wherever precision drowing sets are used.

#### PROPORTIONAL DIVIDER

Extremely accurate finely made proportional dividers. Basic equipment for drafts-men — architects — engineers — students. Replacemen architects engineers students. Replaceable steel points — in hard, leother covered, felt lined cose. Used for proportional reductions and enlargements, copying drawings in enlarged or reduced scale, dividing lines or circles into equal parts, quick solving of difficult measuring problems, finding distances on maps without scales, etc. Flot formreplaceable steel points. Pressure setting. Graduated for lines from 3/4" to 10" — Circles from 6" to 20". Excellent, accurate utility model. Shpg. vt. 8 ass.

F-167 — Net 3.95 .....Net 3.95

#### **Professional GIANT BOW**



. 4" Size with Center Wheel Adjustment


· Finely Balanced-Professional Type

Professional quality utility set in a fitted, velvet lined case. Made in Western Germany of nickel plated, hard-relied brass. 6" giant bow has preferred center wheel adjustment. Makes circles from V<sub>6</sub>" to over 10" in di-ometer. Set includes 6" giant bow, interchangeable pen and pencil parts, extra heedle for using bow as divider, handle for use with pen and pencil parts, lead, lead bax and repair parts. Shpg. wt. 1 lb.

#### **Direct Vision Spectroscope**

SIMPLEST WAY TO OBSERVE SPECTRA

BETTER THAN ANY GRATING SCOPE OF EQUAL COST HIGHEST GRADE OPTICS IN DIRECT VISION FIELD



Every physics, chemistry, science class, or hobbylist can afford to own this superb instrument. It is the simplest means by which one can abserve emission spectra from light sources and voporized chemical solts, and the Solar

light sources and vaporized chemical solts, and the Solar Spectrum.

A broad dispersion field of high intensity is obtained from several dispersing prisms of matched glass, while a high grade optical system yields good resolution, sufficient to separate 5760.6A° from 5790.6A° in the spectrum of a fluorescent lamp. The slit has adjustable width and can be focused sharply by means of an eye piece draw-tube, ossuring easy viewing and establishment of Frounhofer lines of the Solar spectrum or bright fines of the emission spectra. Metal parts are made of highly polished corrosion-proof steel. Cames in plush-lined case. Shipping wt., 9 ox. Net 19.50 F-359

#### INDOOR-OUTDOOR THERMOMETER

2.29

Tell inside and outside temperature—instantly—from the comfort of your roam. Inside location—ideal for quick-easy reading. Dual tubes single scale for instant, visual comparison. Plastic case with modern topered lines. 8" x 2½" x 48" long capper capillary tube and butb. Lorge scale numeral for ease of reading. No moving parts to become worn. Shape. Wt. 1 tb.

7-321

Net 2.29



#### HARD MAPLE PANTOGRAPH


 ENLARGES - REDUCES REPRODUCES! PRECISION SUSPENDED!

21" adjustable pantograph— 21 different ra-tios from 11/2" to 8. Enlarges, reduces or reproduces drawings -sketches -



sketches—diagrams—mops etc. Most rapid, occurate means of reducing or enlarging to scale. Lacquered highly finished bars are 21" long and 3/4" wide. Heavy metal standard, with bearing eliminates all fiction. Chrame plated hardware—ratio thumb screws and nuts. Camplete with lead, accessories and detailed instructions. Shpg. wt. 2 lbs. ware—ratio thumb screws and nuts. Camplete with leconoccessories and detailed instructions. Shpg. wt. 2 lbs. F-158 .....

#### "draftette" DRAFTING MACHINE



F-401 Draftette with 4 x 6" scole, List 6.95... Net 5.26
F-402 4 x 6" Draftette mounted on 11" x 17" drawing board. List 8.50

#### SUPER DRAWING KIT

. REGULAR



. COMPARE OUR PRICE!

Lafoyette has designed this set with the professional draftsman and advanced student in mind. Contains all the necessary equipment for drafting mechanical drawing-designing-engineering. Sturdy occurate components. Includes 20" x 24½" drowing board 24" T square, 10" 30°/00" triongle, 8" 45" triangle, french curve, 12" triongular rule, 6" 180" protractor, 4 pencils pencil pointer, erasing shield, thumbacks, and art gum eraser. If purchosed separately these components would cast many times our low price. An unbeatable valuel Shpg. wt., 10 lb.

F-180 ..... SPECIAL COMBINATION OFFER Consists of F-65 Technical Drafting Set and F-180 Sup drawing outfit. Shpg. wt., 12 lbs.



MODIFIED ABBE DESIGN - READS % SUGAR DIRECT O NO MOVING PARTS TO

WEAR OUT TO DETERMINE REFRACTIVE

INDEX



Here is a beautifully constructed scientific tool of simple design, easy to operate, with no moving parts, except for the facusing eye piece.

Operation is very simple. A few draps of the sample are ploced on the prism, the caver is closed and observation is made by means of tungsten illumination or daylight. A perfectly clear field, completely color corrected, shows a reticle graduated in percent from 0.32%. With the sample in place as described above the field will show a sharp dividing line between a bright and dark portion; where the dividing line falls determines the reading, which can be estimated to 0.1% accuracy. The instrument can be canverted to a universal laboratory type by changing % readings to "index of refraction" readings, Np. (Consult Chemical Handbaok or literature.)

This instrument is an essential tool in the fields of sugar refining, agricultural, food technology, medicine, theoretical chemistry, etc.

Comes in a convenient portable leather case. Shipping wt., 1½ lbs.

P.358. 200 Down. Net 29.50

F-430. Some as F-358, but range from 50 to 80%. me as F-358, but range from 60 ta


#### MAXIMUM-MINIMUM THERMOMETER

4.70



Far weather enthusiasts gardeners farmers, etc. Gives three readings at a glance — maximum, minimum and present temperatures. Self-registering — no knobs — magnets — or push buttons needed far reset. Magnifying lens case for ease of reading. Maintains automatic check on temperature variations. Makes you the lacal weather expert. Shpg. wt., 1 lb. 695

list 6.95 F-372



STEREO VU BALANCE METER

BALANCES STEREO SYSTEMS TWO METERS IN ONE

• ACCURATE TAPE RECORDER LEVEL INDICATOR

Farever ends the problem of adequately balancing your stereo system. Two laudness meters provide a continuous camparisan of speaker levels. The scales are calibrated in "Valume Units" and percent. 1.2 volts input sensitivity for 0 Vul or 100 percent indication, Instead of continuously running back and farth between listening position and valume control, you can balance the entire system in one step. The special calibrating switch and 20 db attenuation controls tem in one step. The special calibrating switch and 20 db attenuation controls permit exact matching of channels. The ideal recording level indicator for inexpermit exact matching of channels. The ideal recording level indicator for inexpermit exact matching of channels. The ideal recordings. Safeguarded against burning out by two internal DC blacking capacitors, Greater than 8,000 and impedance permits connecting in autiput circuits without laading. The entire unit is housed in an attractive plastic case 3" x 1½" x 5½" Shpg. wt., 2½ lbs. TM-40 STEREO BALANCE METER



AUDIO OUTPUT VU LEVEL METER



A real planetarium—with the features and accuracy of prafessional models. Displays over 60 constellations as seen from any geographical lacation in the Northern Hemisphere, at any month of the year. New Saturn and Satellite prajectors trace the path of Saturn and Sputnick across your "private sky." New constellation prajector with set of 12 slides projects the mythical constellation figures over stars prajected by the planetarium. New solar and lunar eclipse projector simulates 6 types of eclipses. Additional rheastar control provides greater confrast, Pointer and prajection unit operate from planetarium current. 32-page instruction booklet with charts and illustrations for easy location and identification of stars, planets, and satellites. Far 110V. A.C. only. Shpg wt., 4 lbs.



#### STEREO AUDIO **ANALYST SINGLE** NEEDLE — DUAL **CHANNEL VU BALANCE METER**

O UNIQUE TWO COIL GALVANOMETER TYPE
PRECISION METER MOVEMENT O SEVEN RANGES
OF METER SENSITIVITY O EFFORTLESS BALANCING OF STEREO SYSTEMS O PROVISION FOR
USE AS VU METER AND TAPE RECORDER LEVEL
INDICATOR O MAXIMUM METER SENSITIVITY
120 19

## Deluxe Automatic Wire Stripper

"Belayed Action Return"
Strips solid

or stranded

4 hole precision
 ground blades
 Strips sizes 12 to 20



Automatic — efficient — easy to use. Strips insulation from all wires, 12 to 20, neatly and quickly. Delayed return action prevents crushing fine wires. A real time saver for servicemen — electrical workers — production lines — etc. Narrow spaced handles for easy grip. Lightweight and easy action for less fatigue. No bother of changing blades or adjusting cutter for varying wire sizes. Extremely well built for years of service and uniform performance. Shpg. wt., 1 1/4 lbs.

HD-349 List \$8,25 HD-348 Replacement Blades for Above

LIBERTY

AVENUE

JAMAICA

NEW

YORK

o N M

C S Supplier

20 1

7

Electronic

PORA

Z

0 Z

.97 per pr.

#### ICE, CUT ALONG DOTTED LINE

	8		<u>U</u> :					1	 LE.			7.0	Y				AR		R YOU	CON	VENIE
	_	· C	0	>										DO NOT USE	MERCHANDIS	IOWN	SHIPPING	SHIP TO A	TOWN	STREET	NAME
Parcel post charges should be included with fully paid orders. We refund any not used.	not be sent with order (they are collected upon delivery).	change without notice.  Express or freight charges should	All prices are net, F.O.B. shipping point. Prices are subject to	The prices listed in our catalog are not. All trade and cash discounts have already been deducted.	TERMS:									STOCK NUMBER	MERCHANDISE ORDERED FROM CATALOG NUMBER			ANOTHER ADDRESS? GIVE D		(Midd	
		à	2	g are										PAGE NO.				IRECTION		(Middle Initial)	
D (	EASY P.	DEPOSI (We adv	(Enclose postage	FULLY F	THREE	I								QUANTITY DESIRED	IF THIS IS ORDER TO	POSTAL	ROUTE	GIVE DIRECTIONS HERE	POSTAL		
Down Payment	EASY PAYMENT ORDER	DEPOSIT, BALANCE C.O.D.  (We advise avoiding for	(Enclose full amount including postage and sales tax, if any).	FULLY PAID ORDER	THREE WAYS TO BUY	W.								DO NOT USE	IF THIS IS YOUR FIRST ORDER TO US CHECK HERE	STATE			STATE	ROUTE	
Down Payment \$	RDER \$	E C.O.D. \$	including , if any).	70 å	S BUY									DESCRIPTION (Show Manufacturer's Name Whenever Possible)	STOCK NUMBER OF THESE ITEMS.	EXPRESS, THE LET	BULKY OR DELICATE ITEMS SUCH AS TUNE CHANGERS, AMPLIFII	(PLEASE SPECIFY)	TE PARCEL POST  EXPRESS  FREIGHT	BOX WE SHIP?	DATE
or.					DO NOT USE	Ī								DESCRIPTION Icturer's Name Whenever	MS.	ETC. ARE SHIPPED EXPRESS. THE LETTER "X" IS ADDED TO THE	BULKY OR DELICATE ITEMS SUCH AS TUNERS, CHANGERS, AMPLIFIERS,	PECIFY)	L POST	» ALL	m
IMPORTANT—Any correspondence not connected directly with the order should be written on a separate full size letter sheet. This will speed handling of both order and letter.	TOTAL AMOUNT	AMOUNT DUE LAF	POSTAGE/SHPG. CHARGES (We refund any not used)	AMOUNT FOR SALES TAX	SE TOTAL FOR GOODS													STATE	TOWN	If you have moved	
written o	TNUC	FAYETTE	CHARGES of used)	LES TAX	2000									PRICE Ea., Lot, etc.			9			since last order give	
ondence not in a separate h arder and I														TOTAL PRICE DOLLARS   CENT						order give o	19
full siz														CENTS			000			old address here	
e letter sh			Total Pounds		Total					Ш				SHIPPING WEIGHT LBS.   OZ.						ss here.	
eet. This		153	ounds		tal 07									WEIGHT OZ.							

SEE REVERSE

WO 口刀 DO Zm 大刀

#### RETAIL INSTALLMENT CONTRACT

#### MINIMUM ORDER \$20.00 TOTAL CASH PRICE -

#### DOWN **PAYMENTS**

\$2.00 on Orders from \$20 to \$50 \$5.00 on Orders from \$50 to \$200 \$10.00 on Orders Above \$200

ADDITIONAL PURCHASES: Dnce you establish credit, you can "add-on" to your account with purchases of \$20.00 or more. No down payment required on "add-ons" or reopened accounts for less than \$100.00. Just list the items you want on the order blank, write "add to my account" and give your account number. Make certain you sign the Easy Payment Agreement.

Before filling out amounts see EASY PAY PLAN SCHEDULE and example. Figure your sums first on separate paper to avoid errors. USE INK. DO NOT ERASE OR CROSS OUT.

NOTICE TO THE BUYER: 1. Do not sign this agreement before you read it or if it contains any blank space. 2. You are entitled to a completely filled in copy of this agreement. 3. Under the law, you have the right to pay off in advance the full amount due and under certain conditions to obtain a partial refund of the credit service charge.

## LAFAYETTE RADIO ELECTRONICS CORPORATION (SELLER) 165-08 LIBERTY AVE., JAMAICA 33, N.Y. sells and buyer purchases merchandise as described on reverse

side hereof to be kept in good repair and unencumbered at buyer's stated address. Seller shall retain title to and right to possession of merchandise until fully paid. Upon default of any payment or payments seller may declare entire unpaid balance due at once and may also repossess merchandise retaining previous payments as compensation for the use thereof. If proceeds of resale of merchandise are insufficient to cover buyer's obligation, buyer will pay the deficiency to seller; if proceeds result in overage, seller will pay such overage to buyer. Payments will be made to the place and/or to any party designated by the seller

LAFAYETTE RADIO ELECTRONICS CORPORATION (SELLER)

BUYER

E	Buyer's Copy, Mailed-Date	FOR OFFICE SE ONLY Account Number
	(Please Print) Name Present Home Address  City	neState
	To fill in spaces below correctly refer to EASY PAY PLAN Schedule on this sheet and note example.  1. Total Cash Price* 2. Sales Tax (if any) 3. Total (items 1+2) 4. Down Payment See Down Payment Schedule 5. Unpaid Balance (item 3 minus item 4) 6. Credit Service Charge (See EASY PAY Schedule)	EXAMPLE-(Standard Terms)  If Item (5) Unpaid Balance = 106.50  Item (6) Credit Service Charge = 11.00  Item (7) EASY PAY Balance = 117.50  Your Monthly Payment (See Schedule) is 10.00  You will pay \$10.00 for 11 months or 110.00  And your FINAL Monthly payment will be 7.50
	7. EASY PAY BALANCE (Add items 5+6) Total EASY PAY Price (Add items 3+6) EASY PAY ORDERS SENT SHIPPING CHARGES COLLECT. DO NOT INCLUDE	Buyer agrees to pay \$ each month beginning one month after shipment for months and a FINAL Monthly payment of \$

#### RETAIL INSTALLMENT, CONTRACT

(L.S.) DATE

#### NEW "EASY PAY PLAN" PAYMENT SCHEDULE

If Unpaid Balance Is	Standard Credit Service Charge	Terms Monthly Payment	Extended Credit Service Charge		If Unpaid Balance Is	Standard Credit Service Charge		Extended Credit Service Charge	
UP to 20.00	2.00	5.00	AVAILABLE	ONLY	100.01 - 110.0	00 11.00	10.00	15.00	6.00
20.01 - 30.00	3.00	5.00	ON ORDER	s WITH	110.01 - 120.0	0 12.00	10.00	17.00	6.00
30.01 - 40.00	4.00	5.00	UNPAID BA	LANCES	120.01 - 130.0	0 13.00	10.00	19.00	7.00
40.01 - 50.00	5.00	5.00	OVER S	50.00	130.01 - 140.0	00 14.00	11.00	21.00	7.00
50.01 - 60.00	6.00	6.00	7.00	5.00	140.01 150.0	00 15.00	12.00	23.00	8.00
60.01 - 70.00	7.00	7.00	8.00	5.00	150.01 - 160.0	00 16.00	12.00	24.00	8.00
70.01 - 80.00	8.00	7.00	9.00	5.00	160.01 - 180.0	00 18.00	13.00	27.00	9.00
80.01 - 90.00	9.00	8.00	11.00	5.00	180.01 - 200.0	20.00	14.00	30.00	10.00
90.01-100.00	10.00	9.00	13.00	5.00	200.01 - 225.0	00 22.50	15.00	34.00	11,00
	Fo	r purpo:	se of receiving	ing cred	it for above E	ASY PAY I	PLAN pu	rchase, th	e buye

	If Unpaid C Balance Is	Standard redit Service Charge		Extended Credit Service Charge	
ł	225.01 - 250.00	25.00	16.00	1 38.00	12.00
1	250.01 - 275.00	27.50	17.00	42.00	14.00
	275.01 - 300.00	30.00	19.00	45.00	15.00
ı	300.00 - 350.00	35.00	21.00	51.00	17.00
	350.01 - 400.00	40.00	24.00	58.00	19.00
ı	400.01 - 450.00	45.00	27.00	66.00	22.00
ĺ	450.01 - 500.00	50.00	30.00	73.00	24.00
	On orders over \$5 Credit service che amounts shown on	arge and pa	yments wil	I be in prop-	ortion to

	For purpose of receiving	credit for above EASY PAY PLA	N purchase, the buyer r	nakes the follow	wing representation:	
With Parent Whom Spouse Living Alone						
	ermonent (Check revious which)				How Long (Years)	(Months)
Age (Must Be Over 21)	Single Name of Spouse	Spouse Employed By		[Address]		Salary
Droft Classification	Reserve Status	Have you bought Yes [] from Lafayette before? No	On Time Yes D	If yes, please g Time Payment A	ive your Lafayette	
Real Estate Holdings—Addr	ess		Cit	y	State	
Recorded In Name of			Present Value S		Mertgage \$	
Name Present Employer	if self-employed, so state		Pasition Bodge No.	Salary	How Long (Years)	(Months)
Business Address			Any Other Income	Source		s
Name Farmer Employer					How Lang (Years)	(Months)
Bank Account With	Sovings [ Checking [	· (A	ddress)			
First Trade Reference		(Ac	idress )	Highest Credit \$	Still Owing S	Monthly Payment \$
Second Trade Reference	(Name)	(Address)	(City and State)	Highest Credit \$	Still Owing \$	Monthly Payment \$
Third Trade Reference	(Name)	(Address)	(City and State)	Highest Credit \$	Still Owing \$	Monthly Payment \$
Negrest Relative	(Name)	(Address)	(City and State)			
	Name (DO NOT LIST THO	SE WITH WHOM YOU RESIDE)	Address		Relationship	

#### Advantage onger Repayment Period Simplified " Features Open Add-On" n orders from \$20 to \$ n orders from \$50.01 t of these Payments A Lafayette TODAY new EASY PAY Minimum Order Down HOOSE Service TERMS 70

Take

**Payment** 

**Monthly Payments:** Charge:

ment; Books and Manuals;

# Q EASY PAY PLAN

\$20.00

payments)

the lowest

\$2.00

AS LOW

# ADDITIONAL

MOW

required you credit "add-on" payment 으

All credit service


FOR

ADVANCED

**PURCHASES** 

IMPORTANT: Please sign this for- before mailing. Be sure to give age. (Must be over 21).

## **OUTSTANDING HAM and SHORT WAVE EQUIPMENT**





#### HALLICRAFTERS MODEL S-107 RECEIVER



HALLICRAFTERS MODEL SX-110 RECEIVER




HALLICRAFTERS MODEL SX-100 RECEIVER



JOHNSON-VIKING ADVENTURER TRANSMITTER



JOHNSON-VIKING CHALLENGER TRANSMITTER





## **PROFESSIONAL COMMUNICATION RECEIVER**



#### Superheterodyne Circuit Utilizing 8 Tubes & Rectifier Tube

- BAND SPREAD FOR EASY TUNING BUILT-IN "S" METER WITH ADJUSTMENT
- CONTROL
- **EXCELLENT SELECTIVITY**
- ACCESSORY POWER SOCKET PROVIDED
  ALL TRIMMERS PRE-ALIGNED
- COVERS 455KC. to 31MC. IN FOUR BANDS
- VARIABLE BFO AND RF GAIN CONTROLS BUILT IN PRE-CALIBRATED "S" METER
- SWITCHABLE AVC AND AUTOMATIC NOISE LIMITER
- ALL MAJOR COMPONENTS PRE-MOUNTED
- DUAL 4 AND 8 OHM OUTPUT- IMPEDANCES

High sensitivity superheterodyne circuit utilizes 8 minioture tubes plus rectifier tebe and transformer input, full wave rectifier. The 80-40-20-15 and 10 meter amoteur bands are clearly indicated on the illuminated dial face, and can be easily tuned with the pre-calibrated band spread. The receiver has complete band switching, thus eliminating the need for bathersame plug-in cails. Band spread is loid out an easy-to-read 0-100 scale, and features a weighted cantrol knob which offers smooth, precise tuning. Coverage of from 455 KC to 31 MC is obtained through the use of four switchable ranges (455-1600 KC/1.6-4.8 MC/4.8-14.5 MC/10.5-31 MC). All controls, switches and phone jack are lacated an the front panel.

Receiver sensitivity is 1-25microvalts for 10 DB signal to naise ratio. Selectivity is -60DB at 10KC image rejection is -40DB at 3MC. Ponel is grey metal with white lettering, and controls are block with aluminum trim. Hinged top makes inside of receiver readily accessible to aperator. 7%" H x 15" W x 9" D.Tubes: 3-68D6, 2-68E6, 2-6AV6, 1-6AR5, 1-5Y3. Shpg. wt., 22 lbs.

5.00 Down

Net 44.50 Net 79.95

HE-251 WX

## CITIZENS BAND 11 METER TRANSCEIVERS

**GONSET G11** 



HE-527 WX For 115VAC HE-528 WX For 12VDC HE-529 WX For 6VDC

124.50

REGENCY 24.95

HALLICRAFTERS CB-1



**VOCALINE ED-27** 



GLOBE CB-100



PHILMORE KIT



NATIONAL NC-60 RECEIVER



NATIONAL NC-188 RECEIVER



NATIONAL NC-109 RECEIVER



HAMMARLUND HQ-100 RECEIVER



HAMMARLUND HQ-110 RECEIVER



**GONSET 3136 TRANSCEIVER** 



**GONSET 3241 RECEIVER** 



**GONSET 3222 RECEIVER** 



**GONSET 3261 CONVERTER** 



## mm TRIPLE TURRET Photo Electric Eye Camera

NEW! 1960 "HOLIDAY II" 8mm Triple **Turret Camera** 

Regular 59.95

- . BUILT IN-DIRECT READING-**Electronic Exposure Meter**
- RATED..."Best Movie Camera Value"!
- NOW'S THE TIME-Move Up To "MOVIES"!
  - 3 Fast-Fixed Focus—f1.8 Lenses!
  - 3 Built in Filters!
  - · Picture Window "Multi-View"
  - Simple "Read-Set-Shoot" Action • "Drop-in" Spool Loading!

  - Long run—Constant Speed Motor!
  - Die Cast Aluminum Body!
  - Film Footage Indicator

switches lenses fram narmal to wide angle to telephoto instantly. Picture window optical view finder frames the "take" area for each lens. Easy-exanomical-"drop-in" spool loading. Impossible to "reverse" laad. Long run governor controlled—constant speed mator. Single frame governor. Film footage indicator. Rapid rewind crank. Die cost aluminum body. New-more compact-design, Shpg. wt., 4 lbs.

2.00 Down F-525

Shoot like a "pro" from the very first rall! Built-in photoelectronic exposure meter eliminates guesswork farever.
Just point-set-and shoot. "Snop-shot" simplicity in a fooljust point-set-and shoot of 1.8 lenses—normal, wide angle
proof movie cameral fost f1.8 lenses—normal, wide ongle
proof movie cameral fine color or black and white movies—
ond telephoto—for fine color or black and white movies—
one in dim light. Fixed focus an all lenses—no mare
even in dim light. "Auto-odjust" feature sets all lenses
"fumble focusing." "Auto-odjust" feature sets
when anyone is set for light conditions. Bubb in filters for

## "HOLIDAY M-1000" 500 Watt 8mm Movie Projector



37.95

- 500 watts—Sparkling Clear and Sharp!
- Swing out gate—Easy Loading!
- **High Intensity Blower Cooled!**
- Coated 3/4" f1.6 lens!
- 400 ft. Reel Capacity!
- All Aluminum-Die Cast Construction!

## XMAS SPECIAL COMBINATION

Holiday II Triple Turret Camera Holiday M-1000 500 Watt Projector

Reg. 59.95 Reg. 49.95

COMPLETE

F-527

5.00 Down Shpg. wt., 14 lbs.

Reg. Total 109.50

#### "SONOCHORD 40" DELUXE ELECTRIC CHORD **ORGAN**

- . 34 FULL SIZE KEYS
- . 40 CHORD BUTTONS
- ADJUSTABLE VOLUME CONTROL
- . 5 SETS OF SWEDISH STEEL REEDS
- . DECORATOR BRASS FINISHED LEGS

## PREVIEW 8 - ACTION MOVIE VIEWER

- VIEW 8MM MOVIES ANYWHERE-ANYTIME!
- COMPLETELY PORTABLE!
- FORWARD—REVERSE—STILLS!
- BUILT IN ILLUMINATION!
- 400X AREA MAGNIFICATION!

Automatic action, 8mm, bottery aperated movie viewer. Renders a bright contrasting picture—(400 areas magnification)—operates smoothly—hos outomatic drop in loading. Takes standard 50° reels—black and white and calor. Built in illumination—uses 2 standard penlite botteries—simple one hand operation—smooth, quiet mechanism that will never damage film. Prism optical system, automatic rewind—can be worked forward, backword and far stills. Handsome high impact polystyrene case—self Jubricating nylon gears. Compact—will fit in packet. Less batteries. Shpg. wt., 1 lbs.

BA-155



Reg. Batteries for obove—2 required Net .10 ea. Net .10 ea. Net .10 ea.

#### LAFAYETTE **EXCLUSIVE ASTROGRAPHIC PLANETARIUM**

- \* HOLD THE UNIVERSE IN YOUR HAND!
- COMPLETELY PORTABLE!
- \* SELF ILLUMINATED!
- LOCATES AND IDENTIFIES ALL IMPORTANT

Produced for the Science Minded - by the Science Minded.

## YASHICA Y-16 ULTRAMINIATURE CAMERA

- Foolproof "Clip" loading
- Only 4" x 2" x 1" overall
- Speeds 1/25th to 1/200th Sec.
- "Synched" for flash

Combined film and shutter wind and instant 24-expasure clip loading. The lens is a Yashinan 25mm f/3.5 with click stops to f/16. The metal shutter has speeds fram 1/25 to 1/200 sec. plus B and T, and built-in synchranization. Other features are zero reset expasure counter cable release and tripod sackets. Takes 24 B&W ar calar shats an 16mm perfarated or unperfarated film. Slides can be used an standard prajectors. Make sharp, clear full sized prints. Shpg. wt., 1 lb.



4 SPEED AUTOMATIC PHONOGRAPH

SEPARATE BASS, TREBLE AND LOUDNESS CONTROLS

4 SPEAKERS







itam Stereo, 4-speed autamatic consale... designed to tease your listening pleasure and enhance the decor af ir hame. Imaginative styling, superb craftsmanship, and noting sound. Dual channel omplifier, faur speakers, orate boss, treble ond loudness contrals. Matching aker enclasure remayable far use as a remate unit. An

Page 46



e full "On the other hand, we hope Peabody, Mas countries refused her the full was a vice president of the eting that is held at stated MORE LAFAYETTE SPECIAL VALUES! LAFAYETTE'S AMAZING NEW 4-TRANSISTOR RADIO was found that many panies were seeking a had 4-HIGH PERFORMANCE NEW! The "ULTRA" TRANSISTORS PLUS GERMANIUM DIODE SUPERHETERODYNE CIRCUIT Electro-EARPHONE JACK-BUILT-IN Tool Kit FOR PRIVATE LISTENING FERRITE BAR ANTENNA LATEST PRINTED CIRCUIT • HANDY POCKET SIZE Quite frankly, the exceptional tonal quality and precision workmanship of this radio make it ane of the finest transistor radio values Lafayette has yet offered. Highly sensitive and selective, this radia will surprise you with its performance over the complete broadcast band. A perfect gift for the whole family—use it for baseball and football games, planics, beaches or as a handy radio in the home. Printed circuit construction insures trouble free performance and extra long life. Extraordinary indoor or outdoor reception is provided by the built-in ferrite loop-stick antenna and PM speaker. The plug-in earphone cuts out built-in speaker for completely private listening. Only one small long-life 9 volt battery is required due to the exceptionally low battery drain. Complete with attractive leather case, long-life 9 volt battery is required due to the exceptionally low battery drain. Complete with attractive leather case, Size: 2½"W x 4"H x 1½"D. Shpg. wt., 1 ½ lbs.

FS-204 Designed with the Professional Quality Throughout All the most often needed tools The finest-most compact carefully selected tool kit we have ever offered. Each component tool chosen to offer utility and quality.

The villtra. kit contains the following: 5½" insulated side cutters. 5" insulated chrome plated diagonals, 6" insulated chrome plated throng iron, plated tweezers, 7" insulated chrome plated with soldering iron, plated tweezers, 10 year, 10 year, 20 Burgess 2U6 type (1 required) Shpg. wt., 2 oz.

BA-178 3 WAY SLIM CRYSTAL MICROPHONE May be hand-held, stand mounted or suspended by lavalier cord! Frequency 60-10,000 CPS FAMOUS BRAND 2-STATION INTERCOM On-Off Switch cha ALL-METAL UNBREAKABLE VERY SMART STYLING FOR 117 VOLTS AC OR DC SENSITIVE—PICKS UP SLIGHTEST SOUNDS AT FOR HOME OR OFFICE IDEAL BABY SITTER OR SICK ROOM WATCHER A DISTANCE Specially Priced THE AUTO BARO-ALTIMETER 12.50COMPLETE WITH 50' CABLE

Here is a FAMOUS-MAKE 2-station electronic intercom PRICED SO LOW WE DARE MOT MENTION THE MANUFACTURER'S NAME. Sensitive—picks up sounds from across the room. Beautifully styled to grace any home or office. Moster station has across the room across the room switch. Remote is always "open," making it ideal will be across to across the room invalids, children at play—or for store to stock of listening to boby, sick room, invalids, children at play—or for some penny a room, restaurant to kitchen, etc. Alnico 5 pm speakers, Costs less than penny a room, restaurant to kitchen, etc. Alnico 5 pm speakers, Costs less than 50' coble. Simple to good poperate. Complete system includes Master, Remote and 50' coble. Simple to operate, easy to install—virtually foolproof. Size of each station approximately approached to install—virtually foolproof. Size of each station approximately at "x 4" x 4" Shape, wt., 6 lbs.

8" x 4" x 4" x 4" Shape, wt., 6 lbs. SHOWS CHANGES IN ALTITUDE WHILE COMPLETE WITH 50' CABLE DRIVING • FORECASTS WEATHER • INVALUABLE FOR THE AUTO TRAVELER Here's an instrument which is as important to every driver as a compass is to a ship's captain. It accurately forecasts tomorrow's weather today (by barometric pressure) and indicates your exact altitude while you drive along. Meter reads altitude from —400 to 10,000 feet above sea level, and is housed in durable, vibration-proof plastic case. The Auto Altimeter comes complete with mounting bracket, and step-by-step installation and operation instructions. Also included is a handy chart which converts all numerical barometric changes, into the coming day's weather forecast.

F-483. Net 6.95 SPECIAL! TABLE TENNIS SET LAFAYETTE BINOCULARS Precise design—quality material—and expert workmanship. These assure the REG 8.95 fine optical performance of Lafayette binoculars. All lenses are hard coated Complete PING PONG -prisms clamped in lightweight alloy SET FOR 4 frame and body—leather covered barrrame and pody—learner covered par-rels — extra large oculars — precision threading — sealed against dust and moisture — properly collimated and aligned — finest optical glass. All are center focus with adjustable right eveat 1/2 USUAL PRICE Play Singles or Doubles center focus with adjustable right eye-"Buffalo" Pebbled piece. Hard leather case and neckstraps included with each pair. Rubber Face American Style Paddles 7X35 Popular, versatile, all purpose binoculars. For the sportsmen—hunter—bird watcher—vacationer, High luminosity. Compact design. Shpg. wt., 3 lbs. Page 73.3 Popular, versalis, dil purpose binoculars. For the sportsment number—bird watches vaccioner. Then town nosity. Compact design. Shpg. wt., 3 lbs.

F.183. Wide Angle. Top performance—highest quality. Almost twice the field of view of ordinary 7X35 binoculars. Spots and holds a moving torget faster and easier. Oversize oculars and prisms. Shpg. wt., 3½ lbs.

F.184. 20.0 Down. Net 29.50 binoculars. The choice of professionals because af exceptionally high light gathering power. Superior image brightness. Shpg. wt., 3½ lbs.

2.00 Down. 2.00 Down. Net 22.50 per 2.00 Down. Net 22.50 per 2.00 bigs. Plane spotters, forest rangers—any long distance view. Add 10% Fed. Tax to the above prices. 2.00 Down. Net 28.95 Four 3 ply Laian wood paddles. Maximum strength with minimum weight. "Buffolo" pebbled rubber faces for the most in "speed net, taged read a standard American style handles. A standard American style handles. A Net extends leavy days offer regulation ploy. Six regulation balls—tough cellurate taged and the standard of the standard o Regulation Balls 534 L'AIGLON .40...

## TIS THE SEASON TO BE SAVING!



T-1600 REG. PRICE

SPECIAL PRICE

RK-410W Net 6.75.
LAFAYETTE stocks all Wollensak tope recorder

5.95

## TAPE RECORDERS AT PRICES YOU CAN AFFORD!

MODEL T-1500 HI-FI TAPE RECORDER-POPULAR SALES RECORD SMASHER!

• 10 WATTS PUSH-PULL OUTPUT • 40-15,000 CPS +3 DB AT 7.5 IPS! • DISTORTION LESS THAN 0.8%! • SIMPLIFIED KEYBOARD CONTROL • INGENIOUS PORTABLE DESIGN — WEIGHS ONLY 18 lbs.

reels up to 7". Supplied complete with ceramic wide-range microphane, 1 reel of tape, 1 empty takeup reel, radio-TV attachment cord and Hi-Fi cable. 6\y'' x 10\\alpha" x \\dagged \w''. Shpg. wt. 21 lbs. For 110-120 volts 60 cycles AC. Also avoilable in 50 cycle units; please specify. RK-405WX Reg. 199-50- 5.00 Down Net 139.50

#### MODEL T-1515 STEREO HI-FI TAPE RECORDER-UNSURPASSED STEREO VALUE! REG. PRICE 229.50 OUR SPECIAL PRICE 167.50 5.00 Down

The Hi-Fi enthusiast's dream in a campoct portable tape recorder far true sterea performance. Hos all the styling and superb features of the fomous monaural T-1500, plus stereo head and built-in second preompli-

fier. Ploys and recards dual-track monaural, plays dual-track stereo.  $6\frac{1}{2}$ " x  $10\frac{1}{4}$ " x  $11\frac{1}{4}$ ". Shpg. wt. 24 ibs.

RK-406WX..Reg. 229.50. 5.00 Down..Net 167.50

#### NEW! MODEL T-1600 ELECTRONICALLY CONTROLLED RECORDER-SENSATIONAL

FOR: DICTATION . . . HI-FI Automatic Stop, Rewind, Replay and Turn Off

New Rock Space Bar provides instant and immediate replay of any port of the tape. PUSH-TALK control in microphone permits operation from remate location.

All other features and specifications similar to Model

RECORDER—SENSATIONAL

T-1500 plus added function indicator lamps. With remate control, ceromic microphone, 2 reels, tape and cords. Shpg. wt. 23 lbs.

RK-407 WX Reg. -299.50 10.00 Down Net 237.50

NEW MODEL T-1616 STEREO RECORDER SPECIAL PRICE 261.25

Same features as Madel .T-1600 plus IN-LINE stereo-phone playback head and built-in secand preamplifier. RK-408WX Reg. <u>329.50</u> 10,00 Down Net 261.25

#### **FANTASTIC SAVINGS!**



Lafayette shatters car- 20-17,000 cycles. Features 

tridge prices with this stered buy of the year. For less
than the price of the diamond needle alone you can
have the famous General
Electric magnetic GC7 (.7

backed up by both the GE MIL) diamond stereo car- and famous Lafayette guar-

## **NEW!** "PROXI SCOPE" Slide Viewer

- For all 2 x 2 slides 35mm, super slides, 828
- Large Screen − 3" x 3" − Viewing
- Battery Illuminated

Extra brilliant viewing of all 2 x 2 slides. 35mm, Bontam (828) and super-slides. Paper, metal, plastic or glass. Highly corrected 3" x 3" lens allows small group viewing. May be hand-held or placed on table. Built-in "tilt" for best viewing angle. Lens system gives amazing depth to slides. You view with both eyes for "3-D" effect. Slide carriers provide semi-outomatic action. "Battery-Saver" feature — lights only when slide is in viewing position. Bright — shorp images with no "cut" corners. Lightweight — sturdy — compoct. Complete with 2 corriers — 2 color corrected builbs — instructions. Shpg. wt., 31/2 lbs.



## NEW! WEN 'SOUPED UP' SABRE SAW MODEL 909

 HEAVY DUTY—full 6 Amp.
 1/2 H.P. Motor—1" Strake
 LARGEST CUTTING CAPACITY ● 6" 90° Cut ● 4" 45° Cut

> LIST PRICE 44.95 ONLY

Extra Blodes for WEN 909: Set of seven replacement blades. Shpp. wt., 1/4 lb.
WEN 900 List 3.40



#### SALE! 4 CUP ELECTRIC **PERCOLATOR**

● Best Buy! ● Saves Dollars! • Heavy. Chrome Plate!

#### **NEW! SUB-MINIATURE 4-TRANSISTOR HEARING AID**

ONLY 21/2" LONG X 13/4" WIDE X 5/8" THICK

LIGHTWEIGHT—WEIGHS LESS THAN 2 OZ. INCLUDING BATTERY
 SMALL ENOUGH TO BE CARRIED IN BREAST POCKET
 4-POSITION TONE CONTROL
 UNIQUE TELEPHONE SWITCH ALLOWS TELEPHONE CONVERSATION
 LATEST ELECTRO-MAGNETIC EARPHONE AND MINIATURE CRYSTAL

UTILIZES ECONOMICAL PENLIGHT BATTERY

BATTERY FOR ABOVE

BA-153 (1 required) Burgess N type. Shpg. wt., 3 oz.

## NEW! 10,000 OHMS PER VOLT MULTITESTER Outperforms Instruments 8.95 Many Times its Size

- EXTRA LARGE 31/2" Delivery METER FACE Approxim
- METER FACE
  Approximately
  COMPLETELY WIRED Dec. 18, 1959 (NOT A KIT)

29.50

ALL ACCESSORIES INCLUDED

#### FULL SCALE RANGES

DC VOLTS: 0-6, 0-30; 0-120; 0-600; 0-1200; AC VOLTS: 0-6, 0-30; 0-120; 0-600; 0-1200; DC CURRENT: 0-120 $_{L}$ A: 0-30 $_{R}$ A: 0-300M RESISTANCE: 0-30K; 0-3 MEG DECIBELS —20 to —-63 in 5 scoles; Copocity 50  $_{L}$  $_{L}$ H for old  $_{L}$ H fo



LAFAYETTE RADIO

165-08 LIBERTY AVENUE, JAMAICA 33, N.Y.

BULK RATE S. POSTAGE PAID

New York, N. Y. Permit No. 8486

