

_AFAYETTE



111 Jericho Turnpike, Syosset, L. I., New York 11791

BOSTON . BRONX . BROOKLYN . FALLS CHURCH .

"Associate Stares" from Coast-to-Coast

NEWARK SCARSDALE

PARAMUS . SYOSSET

Index and Complete Adcresses—See Center Flap

Open a



Credit IPTTE Account TODAY

NO MONEY DOWN

Up To 2 Years To Pay LOW MONTHLY PAYMENTS

EASY PAY CREDIT **PLANS**

To suit your individual needs

EXTENDED PLAN*

TAKE UP TO

2 Years To Pay

BUDGET PLAN

LOW

Credit Service Charge

*Pay balance in 30 days, save entire service charge.

Start Now To Take FULL ADVANTAGE LAFAYETTE'S Easy Pay Plans

- No down payment.
- Take up to 2 years to pay.
- One low Monthly Payment buys all your electronic and hi-fi requirements.
- No hidden charges. Small service charge included in fixed monthly payment.
- · Add-On any time you like. No money down and usually no change in monthly payment.
- Choose the plan that suits you best— Budget or Extended.

No need to wait to enjoy anything you need from LAFAYETTE

HERE IS HOW YOU MULTIPLY YOUR SHOPPING DOLLAR UP TO 20 TIMES

Monthly Payments FOR ONLY)	\$5	6	7	8	9	10	11	15	17	19	22	23	24
YOU CAN BUY UP TO		\$100	110	130	160	180	200	220	300	340	400	440	460	500

See Easy Pay Schedule on back of Order Blank



Superb Quality LAFAYETTE Model RK-810 Solid State Stereophonic Tape Recorder

Featuring 4 -Track Stereo Playback*
-Track Monaural Record/Playback

3-Speeds: 1%, 3¾ and 7½ IPS
Record/Playback VU Level Meter

• 5-Position Selector Control for Rewind, Stop, Run, Fast Forward and Pause for Instant Editing

• 2-Heads: 1/4 Track Lamination-Type Record/Playback

1/4 Track Double Gapped High Efficiency Erase

Record Safety Button Prevents Accidental Erasure

• 3-Digit Tape Counter with Reset Button

For Vertical or Horizontal Operation

The new Model RK-810 is engineered to provide virtually every tape recording feature. Successor to our best selling and widely acclaimed Model RK-137 series recorders, the all-transistor Model 810 now has an improved audio output of 2.5 now has an improved audio output of 2.5 watts. Easy-to-operate, the unit features: positive acting 5-position motor control which includes a "pause" setting to stop tape instantly for editing; push-button safety record switch to insure against accidental tape erasure; speed selector, push-button channel selector, and master volume and tone control in addition to 4-track mono record/playback, the RK-

810 plays back stereo tapes when used with a second channel external amplifier containing a tape head input. Built-in 5"x3" speaker for magnificent sound re-production. Also includes external speakproduction, also includes external speaker jack, stereo tape head output jacks, 2 inputs for microphone and aux. Takes 7" reels. Housed in an attractive textured solid vinyl case with built-in accessory compartment and carrying handle. For 110-120 v., 60 cycles AC. Imported. Shpg.

99 D 1527WX \$5 Monthly Lafayette Recording Tape 28 D 0101 7" Reel of 1200 ft. Net 1.59

Response: 40-15,000 cps at 74/2 ips, 40-10,000 cps at 33/4 ips. Wow and Flutter: Less than 0.25% rms at 74/2 lps; less than 0.35% at 33/4 ips. Signal to Noise Ratio: 40 db. or better. Bias and Erase: 60 kc. Crosstalk: 55 db or better. Sensitivity: Mike, 0.6 mv; Aux, 200 mv; External speaker, 16 ohms. Motor: 4-pole. Power Output: 2.5 watts. Dimensions: 115/6W x 124/4H x 63/3"D. Stereo headphone output jacks.



all solid state circuitry ...

NEW! LAFAYETTE MODEL RK-30 SOLID STATE AC AND BATTERY **OPERATED TAPE RECORDER**

- Constant Speed Capstan
- Piano Key Type Pushbutton Controls
- Remote Control from Dynamic Microphone
- Two Speeds—3³/₄ 1⁷/₈ IPS
- ARL-Automatic Record Level
- Control
 Up to 2 Hr. Record/Play Time on 31/4" reel

No Money Down

Complete With: dynamic mike, patch cord, batteries, 3" take-up reel, 3" reel of tape.

Lightweight, compact, combines modern solld state circultry, true AC-DC portability and ease of operation. Ideal for recording and playback at home, in the office, in school or outdoors at the beach or sporting events. Capstan drive assures constant speed recording thus permitting playback of tapes on any dual track reel-to-reel recorder at 334 or 126 lps. Takes reels up to 334". Dynamic mike has remote start/stop switch, prevents tape waste. Other features include: easy-to-use plano key controls for rewind, stop, play plus pushbutton safety record switch; ARL-Built-in automatic record level

to keep loud tones from distorting; record level meter and battery life indicator; self-contained dynamic speaker and jack for external speaker. All controls are accessible with cover on, Built-In 117 v., 60 cycle AC power supply or operates on four "C" batteries included. In handsome case with metal carrying handle, 944Wx24Hx944"D.

Imported. Shpg. wt., 7 lbs. 99 D 1538L \$5 monthly Net 39.95 99 D 6257 Extra batteries (4 required)
28 D 0109 3" reel of 300 ft. Lafayette Tape, 1/2 lb. Net ea. .13



MODEL RK-142T SOLID STATE PORTABLE TAPE RECORDER

- With Recording Level Indicator
- 1/2 Track Doubles Play and Record Time
- Two Speeds—3¾ or 7½ ips
- 4 x 6" Speaker for Fine Tonal Reproduction
- Provision for External Speaker
- Pause Control for Editing

59⁹⁵ No Money Down

ACCESSORIES INCLUDED

Dynamic microphone, shielded connecting cable with clip leads, empty 7" reel.

Takes Reels up to 7"

SPECIFICATIONS -

TAPE SPEED: 7.5 and 3.75 ips. S/N RATIO: —42 db or better at 7.5 ips tape speed. REWIND TIME: 3 min. for 7" reel. FAST TAKE-UP TIME: 3 min. for 7" reel. RESPONSE: Record playback response essentially flat with tone at max. treble. WOW-EILITTEP. 0.2% or better at FLUTTER: 0.2% or better at 7.5 ips; 0.3% at 3.75 ips. POWER DUTPUT: 2 watts. CONTROLS: on/off-tone; volume, record interlock button, speed selector, motor shift control with pause feature.

Perfect for home, school or office. At home, Record level indicator facilitates record by the RK-142T proves ideal for parties or reshowing you when the volume control is correctly set. Jacks provided for microphone, cording your favorite musical performance. Handy fool-proof operation has been pro-vided by a specially designed lever-type record switch which completely eliminates the chance of accidental erasure. Pause phono and extension speaker (special alligator clip cord is supplied). Complete with sensitive dynamic microphone. Finished in attractive scuff-resistant material. Dimensions: 113/x97/8x73/6". For 117 volts, 60 cycles AC. Shpg. wt., 22 lbs. Imported. control for editing and instant switch speed selection. At 334 ips, the RK-142T provides more than 4 hours recording on long play 1/2 mil 2400 ft. tape reel. A special 4x6-inch heavy duty permanent magnet speaker fur. 7" reel of 1200 ft. Lafayette Tape

99 D 1526WX \$5 monthly nishes an exceptionally fine tonal quality, 28 D 0101

PRINTED IN U.S.A. . ENTIRE CONTENTS COPYRIGHTED 1966 BY LAFAYETTE RADIO ELECTRONICS CORPORATION . SYOSSET, L. I., N. Y.



New! Deluxe Solid State 5" AC and Battery Operated Recorders

- Two Speeds—Capstan Drive
- Record Level and Battery Condition Meter
- Remote Control From Dynamic Microphone
- Playback Tone Control

- Plays Up to 3 Hours on a Single 5" Reel
- . Built-in 5" x 3" High Fidelity Speaker
- High Speed Fast Forward
- · Lightweight-Carry It Anywhere

Deluxe Model RK-55 Recorder. An exciting recorder for people on the go! Make quality candid recordings indoors or out, voice and music. Features lightweight and instantaneous operation due to advanced 100% solid state circuitry. Two speeds, 3% and 1% ips allow you to record up to five hours on a single 5" reel (both tracks). Sound can be adjusted with the playback tone control. Rugged (both tracks). Sound can be adjusted with the playback tone control. Rugged motor plus capstan drive for both speeds assure constant speed recording and playback of tape even with other machines. Sensitive dynamic mike has stop/start switch for remote operation. Other features include: safety record button, rotary switch for play, stop, rewind plus fast-forward lever; output jack for external speaker. Built-in power supply for 117v, 60 cycles, AC or batteries (uses 4). 1134wA4hx10°D. With dynamic mike, patch cord, batteries, 5" takeup reel, reel of tape. Imported. Shpg. wt., 10½ lbs.

99 D 1536W \$5 Monthly Deluxe Model RK-60 Radio/Recorder. Same deluxe recorder as above but includes sensitive built-in AM radio. Records direct from radio without external attachments. Imported Wt., 11 lbs. 99 D 1537W \$5 Monthly

ACCESSORIES FOR MODELS RK-55 and RK-66

Extra batteries (4 required) 99 D 6256 5" reet of 600 ft. Lafayette Recording Tape 28 D 0102

Depend on Lafayette for Complete Stocks, Lowest Prices, Fastest Service

SPECIFICATIONS

RK-55, RK-60

Frequency Response: 100-8,000 cps. Flutter and Wow: less than 0.35%. Tracks: dual track. Reel size: up to 5". Speeds: 3¾ and 1½ ips. Blas and Erase: DC. Rewind and Fast-Forward Time: 135 sec., 210 sec. Power Output: 1-watt maximum. Speaker: 5" x 3". Inputs: mike, aux. Outputs: external speaker, 8-0hms. Solid State Circuits: (RK-55) 5-transistors, 1-thermistor, 2-diodes. Radio: (RK-60) AM 535kc-1605kc. Power: for 117v., 60 cycles AC or 6v DC. Frequency Response: 100-8,000 cps. AC or 6v DC.



Complete Self-Contained Solid State Stereo Tape Recorder

Superbly Styled...with These Outstanding Features



1/4-Track Lamination-Type Record/Playback



1/4-Track Double-Gapped High Efficiency Erase Head



Stereo Record/Play-back VU Level Meter



2 Record Safety But-tons for Left and Right Channels — Prevent Accidental Erasures



5-Position "Selector" Control Knob for Re-wind, Stop, Run, Fast Forward and Pause for Instant Editing

Lafayette Cat. No. 671

- 4-Track Stereo and Monaural Record/Playback
- 3 Tape Speeds-1%, 3% and 71/2 IPS
- All-Transistor Stereo Circuitry with 5-Watt Output Power
- Sound-with-Sound
 Sound-on-Sound
- Separate Tone and Volume Controls for Each Channel
- 3-Digit Tape Counter with Preset Button
- Vertical or Horizontal Operation

Lafayette engineers with their famous technical skill have achieved a low-cost stereophonic tape recorder that is a masterpiece of design and styling. Operates in either a vertical or horizontal position. Solid-state circuitry permits instant play or record. Features three speeds, 1%, 3¾ and 7½ ips plus rugged 4-pole motor. Uses quality laminated 4-track record/play head with double gap erase head for thrilling stereo, mono and sound-on-sound, sound-with-sound recording. The RK-815's outstanding sound qualities are enhanced by two built-in 5" x 3" full range speakers. Easy-to-operate pushbutton controls for VU meter, safety-interlock record and Mike/Aux input selector. Takes 7" reels, Housed in a handsome textured solid vinyl case with built-in accessory compartment and coarving handle. textured solid vinyl case with built-in accessory compartment and carrying handle, For 110-120 v., 60 cycles AC. Imported, Shpg. wt., 22 lbs.

99 D 1532WX \$7 monthly . 28 D 0101 7" Reel of 1200 ft. Lafayette Recording Tape

Net 129.95

- SPECIFICATIONS-

Frequency Response: ±3 db, 40-15,000 cps at 7½ ips; ±3 db, 40-10,000 cps at 3½ ips. Wow and Flutter: under 0.25% rms at 7½ ips; under 0.35% at 3¾ ips. Signal-to-Noise: Better than 45 db. Blas & Erase Frequency: 60 kc. Cross Talk: Better than 55 db. Power Output: 5-watts maximum. Input Sensitivity: Mike, 0.2 my; Aux., 100 my. Monitor Output: 16-ohm speaker or low impedance stereo headphones. Solid-State Circuitry: 10 transistors, 4 dlodes. Dimensions: 11%W x 12¼H x 6¾°D.

Tape Recorders Are Available on Easy Pay Plan-No Money Down

www.americanradiohistory.com



Model RK-840 4-Track Solid State Stereo Pushbutton Recorder



1/4-Track Lamination-type Reco.d/ Playback Stereo Head



1/4-Track Double-Gapped High Efficiency Erase Head



5-Position "Selector" Control Knob for Record, Stop, Run, Fast Forward, and Pause for Instant Editing



Two Studio-Type Record/Playback VU Level Meters



2 Record Safety Buttons for Left and Right Channels Prevents Accidental Erasures



Individual Volume Controls for Each Channel

- 4-Track Stereo and Monaural Record/Playback
- All-Transistor Stereo Circuitry with 6-Watts Output Power
- Sound-with-Sound Sound-on-Sound Automatic Shut-off
- 3 Tape Speeds: 71/2, 33/4 and 11/8 IPS
- Stereo Headphone Monitoring Facilities
- Direct Record/Playback from Record Player with Magnetic Pickup
- 3 Digit Tape Counter with Pushbutton Reset

An extraordinary, precision, quality engineered 4-track stereo high fidelity tape recorder offering you the breath-taking realism of full-tange stereophonic sound. Successor to our famous Model RK-675, the RK-840 may be operated vertically or horizontally. Records and playsback stereo and monophonic tapes at three speeds, 7½, 3¾ and 1% ips plus direct record/playback from a record changer or turntable with magnetic phono carbidge. Also features sound-on-sound, sound-with-sound-tront panel jack for stereo headphone monitoring. Uses a rugged 4-pole motor for smooth tape operation and features automatic shut-off at end of tape. Easy-to-use controls include: 5-position fape. Easy-to-use controls include: 5-position

single lever motor control with "pause" and instant reset digital tape counter for precise editing, cueing and tape indexing; volume controls for each channel, master tone control, and separate, safety Interlocking record buttons. Two VU meters assure accurate indication of record/play-back levels. Hi-Fi sound is provided by 2 full-range 5" speakers. Takes up to 7" reels. In black leatherette covered wood case, 15% "W x 14"H x 7%"D. For 105-125 v, 60 cycles AC. Imported. Shpg. wt., 27 lbs.

-SPECIFICATIONS

Frequency Response: ±3 db, 40-18,000 cps at 7½ ips; ±3 db, 40-12,000 cps at 3¾ lps. Wow and Flutter: less than 0.2% rms at 7½ ips; less than 0.3% rms at 3¾ ips. Signal-to-Noise: 48 db or better. Bias & Erase Frequency: 96 kc. Crosstalk: over 58 db. Power Output: 6-watts. Input Sensitivity: 2-Mika phono, 0.2 mv, 0.7 mv; 2-Aux., 100 mv. Outputs: 2-external amplifier; 2-external speaker; stereo headphones. Solid-State Circuitry: 12 transistors, 4 dlodes.



Professional RK-860 4-Track Solid State Stereo Recorder

- 4-Track Stereo and Monaural Record/Playback
- All-Transistor Stereo Circuitry with Powerfull 12-Watts Output
- Sound-on-Sound
 Sound-with-Sound
 Sound Monitoring
- 3 Tape Speeds: 7½, 3¾ and 1½ IPS Automatic Shut-Off
- Stereo Headphone Monitoring Facilities
- 5-Pushbutton Controls Plus 5-Position Selector Knob
- Direct Record/Playback from Record Player with Magnetic Pickup

You will be proud to own Lafayette's finest stereo tape recorder. Our distinguished new Model RK-860 offers everything you could possibly want in self-contained home recording equipment—fabulous performance, superb quality and brilliant styling. Records and playback stereo and monophonic tapes at three speeds, 7½, 3¾ and 1½ ips. Features sound-with-sound and sound-on-sound plus direct stereo disc to tape copying through the special magnetic phono inputs. Also records directly from FM stereo tuners. Automatic shut-off at end of tape. Easy-to-operate controls include: 5-position single lever motor with "pause", instant reset digital tape counter for precise editing, cuing and tape indexing, dual volume and tone controls, pushbutton monitor speaker switches and safety interlocking recording buttons. Has two full range 5 x 7" speakers, Takes up to 7" reels, Housed in a beautiful black leatherette covered wood case with silver metal trim. May be played horizontally or vertically. Size: 15¾W x 14H x 7¾"D. For 105-125v. 60 cycle AC. Imported. Shpg. wt., 29 lbs. 99 D 1530WX \$11 Monthly Net 219.95

7" Reel of 1200 ft. Lafayette Recording Tape. 28 D 0101

Net 1.59

SPECIFICATIONS

Frequency Response: ±3 db, 30.22,000 cps at 7½ ips; ±3 db, 40.12,000 cps at 3¾ ips. Wow and Flutter: less than 0.15% at 7½ ips; less than 0.25% at 3¾ ips. Signal-to-Noise: 53 db or better. Bias & Erase Frequency: 96 kc. Crosstalk: over 60 db. Power Output: 12-watts. Input Sensitivity: 2-Mike, 0.2 mv, 0.7 mv; 2-Aux, 100 mv. Outputs: 2-external amp.; 2-external speaker; stereo headphones. Equalization: NAB for 7½ & 3¾ ips; RIAA for magnetic phono. Solid-State Circuitry: 14 transistors, 8 diodes.

PROFESSIONAL FEATURES

1/4-Track Lamination-type Record /Playback Stereo Head.



1/4-Track Double-Gapped High Ef-Erase ficiency Head



2 Studio-Type il-luminated Record / Playback VU Level Meters.



3-Digit Tape Counter with Pushbutton Reset.



2 Record Safety Buttons for Left Buttons for Left and Right Chan-nels Prevents Accidental Erasures,



2 Speaker Play. back Selector **Buttons for Left &** Right Channels



Microphone-Aux and Mag Phono Selector Button.







New! RK-820-Solid State 4-Track Stereo Record/Playback Tape Deck

- 4-Track Stereo and Monaural Record/Playback
- Separate Record/Playback and Erase Heads
- 3-Speeds: 7½, 3¾ and 1¾ IPS. **Automatic Shut-Off**
- Built-in Solid-State Record / Playback Stereo Preamplifiers
- Records 4-Track Stereo or Mono from FM, AM. FM Stereo Radio or Phono Sources. Live from Mikes
- Sound-with-Sound, Sound-on-Sound

A new low-priced stereo tape deck of uncompromising quality. It is the successor to our famous, best selling Model RK-650 stereo tape deck which was acclaimed by high fidelity critics. With this improved deck you can add the brilliance of 4-track stereo tape reproduction to your music system. Features instant "on" solid-state stereo record/play preamps with dual Illuminated VU meters for accurate record/play level settings. Single-lever control selects fast-rewind, stop, run and fast-forward plus "pause" for precise editing. Digital tape counter with fast pushbutton zero reset in editing and Indexing. Rear panel preamp outzero rese editing. Digital tape counter with rast pushbutton zero reset in editing and Indexing. Rear panel preamp outputs, auxillary inputs and front panel mike input jacks are all readily accessible for easy hook-up. Takes 7" reels. In sturdy utility wood base ready to play, or install in custom installation. Imported. For 117 V, 60 cycles AC. Snpg. wt.

99 D 1528WX \$6 monthly

Net 109.95

7" Reel of 1200 ft. Lafayette Recording tape 28 D 0101

1.59 Net

24 D 1214W

Deluxe Oiled Walnut Wood Base for RK-820. Shpg. wt., 4 lbs. 9.95

To Speed Your Mail Order - Please Give Your Zip Code Number

Dynamic mike with stand. Shpg. wt., 11/2 lbs. 99 D 4602

OUTSTANDING FEATURES

- 1) Heads: Separate 1/4-Track Record/Play & Erase
 2) Tape Reels: Up to 7" Size
 3) 5-Position Tape Motion Control wth "Pause"
 4) Push-Pull Speed Selector
 5) Digital Tape Counter with Pushbutton Reset
 6) Illuminated Record/Playback VU Meters

- 7) Separate Record Volume Controls 8) Individual Record Safety Buttons 9) Stereo Microphone Inputs 10) Solid State Record/Playback Preamp
- 11) Wood Utility Base Included

Frequency Response: ±3 db, 40-18,000 cps at 7½ ips; ±3 db, 40-12,000 cps at 3¾ ips. Wow and Flutter: less than 0.15% rms at 7½ ips; less than 0.25% rms at 3¾ ips. Signal-to-Noise: 50db or better. Slas & Erase Frequency: 96 kc. Crosstalk: over 60 db. Inputs: (Each Channel) microphone, 0.9 mv, 10k ohms; auxiliary, 300 mv, 500k ohms. Outputs: (Each Channel) external amplifier, 0.9 mv, 3k ohms. Size: 11¾W x 9¹¹/₁₄M x 5¹¹/₁₄"D; in wood base, 12%W x 10%H x 6"D.




Record/Playback Deck

- Tape and Input Source Selector Switch Permits Tape and Input Source Monitoring
- 3-Speeds: 7½, 3¾ and 1½ IPS
- Sound-on-Sound—Sound-with-Sound
- 2 Studio-Type Record/Playback VU Meters
- 4-Track Stereo and Monaural Record/Playback
- Separate Solid State Record and Playback Stereo Preamps
- 3-Head Tape Transport with 4-Pole Induction Motor

Now! For the first time Lafayette is able to offer you a 3-head 4-track stereo tape deck at such a sensible low, low price. Enjoy thrilling sound-on-sound and sound-with-sound plus complete 4-track stereo and monophonic record/play-back facilities. Operates vertically or horizontally with styling to match any custom hi-fi music system. Single lever control selects fast-rewind, stop, run and fast-forward plus "pause" for precise editing and cueing. Other professional features include: dual illuminated VU meters for accurate record/playback settings; digital tape counter with push-button reset, automatic shut-off at end of play and rugged 4-pole motor. Has low level inputs for microphones; high level for radio, TV, phono. Outputs for external amplifier. Takes 7" reels. In sturdy utility wood base ready to play. Imported. Shpg. wt. 18 lbs.

99 D 1534WX \$8 monthly Net 159.95

7" Reel of 1200 ft. Lafayette Recording Tape 28 D 0101 1.59 Deluxe Oiled Walnut Wood Base for RK-830. Shpg. wt., 4 lbs. 24 D 1214W Net 9.95 9.95 Dynamic mike with stand. Shpg. wt., 1½ lbs. 99 D 4602



SUPERB FEATURES 1) 3-Heads:

1/4-Track Lamination Type Stereo Playback Head 1/4-Track Lamination Type Stereo Record Head 1/4-Track Double-Gapped High Efficiency Erase Head

2) Automatic Shut-off
3) Tape Reels: Up to 7" Size
4) 5-Position Tape Motion Control with "Pause"
5) Digital Tape Counter with Pushbutton Reset
6) Illuminated Record/Playback VU Meters
7) Separate Record Volume Controls

8) Monitor Switch or Tape or Source 9) Individual Record Safety Buttons

10) Stereo Microphone Inputs

- SPECIFICATIONS -

Frequency Response: ±3 db, 40-18,000 cps at 7½ ips; ±3 db, 40-12,000 cps at 3¾ ips. Wow and Flutter: less than 0.15% rms at 7½ ips; less than 0.25% rms at 3¾ ips. Signal-to-Noise: 50db or better. Bias & Erase Frequency: 96 kc. Crosstalk: over 60 db. Inputs: (Each Channel) microphone, 0.9 mv, 10k ohms; auxiliary, 300 mv, 500k ohms. Outputs: (Each Channel) external amplifier, 0.9 mv, 3k ohms. Size: 11¾W x 9¹¹/₁₀H x 5¹¹/₁₀D; in wood base, 12¾W x 10⅙ x 6°D.12 Transisters, 6 Diodes

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down Lafayette Cat. No. 671



Deluxe Professional RK-880 3-Head Solid State 4-Track Stereo Record/Playback Tape Deck

- Full Facilities for Stereo/Mono Record from Dynamic Mikes, Record Player with Magnetic Pick-Up, FM Stereo Tuner, and Playback through an External Amplifier and Speakers
- Separate Record and Playback Solid State Stereo Preamps
- Sound-on-Sound and Sound-with-Sound

99 D 1531WX \$12.50 monthly. Shpg. wt., 25 lbs. Ret 249.95
Deluxe Dynamic Microphone with stand and lavalier. Shpg. wt., 3 lbs.
Net 14.95

SUPERB PROFESSIONAL FEATURES

3-Heads: 1/4-Track Lamination Type Stereo Playback Head; 1/4-Track Lamination Type Stereo Head; 1/4-Track Double-Gapped High Efficiency Erase Head

4-Pole Hysteresis Synchronous Motor— No Speed Deviation



- SPECIFICATIONS -

Frequency Response: ±3 db, 30-22,000 cps at 7½ ips; ±3 db, 40-12,000 cps at 3¾ ips. Wow and Flutter: less than 0.15% at 7½ ips; less than 0.25% at 3¾ ips. Signal-to-Noise: vert 53 db. Bias & Erase Frequency: 96 kc. Variable Blas: 0.3 ma to 1.5 ma. Crosstalk: over 60 db. Equalization: (playback) 4 position 50, 70, 90 and 140 µ/sec; (record) 4 position 20, 16, 12 and 8 kc. Inputs: (both channels) mike—0.4 mv, 10 k ohms; mag. phono—2.0 mv, 50 k ohms; Aux.—200 mv, 500 k ohms. Dutputs: (both channels) external amp., low impedance headphones. Size: (in case) 157% wt 1314 x % "D: 1134W x 1134 H x 7"D. For vertical or horizontal operation.



Combines Magnificent Sound...



DELUXE NEW MODEL LS-33 SOLID-STATE STEREOPHONIC HI-FI PORTABLE PHONOGRAPH

No Money Down

INCLUDES DIAMOND

Luxurious Styling—Emphasizes The Beauty of Your Phono

Solid State Circuitry—10 Watt Stereo Amplifier

GARRARD 4 Speed Automatic Intermix Changer

4 Speakers—Two 8" Woofers, Two 3½" Tweeters Offer Exquisite Tone

· 4 Controls-Loudness, Balance, Bass, Treble

Detachable Speaker Enclosures

All new luxurious styling with full dimensional high fidelity realism. Engineered with a fully solid-state circuit that offers "instant-on" and exquisite sound reproduction. Stereo amplifier gives 10 watts of power and has 4 controls—Loudness, Balance, Bass, Treble, Each detachable wing contains one 8" heavy-duty woofer and one 3½" tweeter plus a built-in 7' extension cord for wall-to-wall full-dimensional sound. Garrard 4-speed automatic intermix changer will handle all sizes and all speeds of both stereo and mono records. Intermixes different size records of the same speed, Autosize records of the same speed. Auto-

matic shut off. Wide range turnover matic shut off. Wide range turnover stereo cartridge is equipped with a diamond stylus for LP and stereo records, and a synthetic sapphire stylus for standard 78 RPM records. Housed in beautiful all-wood case with simulated walnut and black scuff-resistant Pyroxylin coated material. Speaker grill is brown and gold. For 110V 60c AC. Size: 21½"L (with speaker wings open extends to 42") x 12½"D x 14¾"H. UL Approved. Shpg. wt., 40 lbs. 24 D 0227WX \$5 monthly Net 89.95

45 RPM Spindle for above 24 D 0217

DECORATOR STYLED MODEL LS-25 SOLID STATE PORTABLE STEREO PHONO



MADE IN U.S.A.

- Garrard 4 Speed Automatic Intermix Changer
- Automatic Shut-Off After Last Record Has Been Played
- Solid State Stereo Amplifier For Exciting Realism
- Two 6" Extended Range Detachable Speakers Offer Full Dimensional Stereo Sound
- Diamond Stylus
- · Compatible-Plays Stereo And Monaural

The new Lafayette Model LS-25 Solid State Stereo Phono-The new Lafayette Model LS-25 Solid State Stereo Phonograph features beautiful functional styling—each unit perfectly style-matched, assembling into one compact unit for ease of portability. The Garrard 4 speed automatic intermix different size records and will intermix different size records of the same speed. Features automatic shut-off after the last record. Tone arm is equipped with a VACO crystal stereo tumover cartridge with diamond needle for LP and stereo records and synthetic sapphire for 78 RPM records. Powerful Solid State Stereo amplifier offers exciting stereo realism—3 andio contol functions. stereo realism-3 audio contol functions. Separate full range stereo realism—5 audio contol functions. Separate full range compensated loudness and balance controls plus a tone control. Each detachable speaker wing contains one 6" extended range speaker offering sparkling full dimensional sound—Wood case is covered with Pyroxylin-coated silver and black scuff-resistant material, For 110-120 volt, 60 cycle AC, Dim: 22"L x 13¾"H x 8¾"D, Shpg. wt., 25 lbs. UL Approved. 24 D 0214WX \$5 monthly

Net 72.95

45 RPM Spindle for above phono 24 D 0217

Made in U.S.A.

Diamond

Stylus

... and Superb Styling



NEW MODEL LS-22 SOLID STATE STEREO PHONO **OUR LOWEST PRICE**

STEREO PHONO INCLUDES DIAMOND STYLUS

No Money Down

MADE IN U.S.A.

Famous BSR 4-Speed Automatic Intermix Record Changer

Automatic Shut-Off After Last Record Has Been Played

2 Separate Full-Range Acoustically Balanced Speakers

Solid-State Stereo Amplifier with 3 Controls

Handsome, new, low-priced, Lafayette, solid-state, portable, stereo phonograph—truly rich in looks as well as sound. Features famous BSR fully-automatic 4-speed changer. Stops after last record has played. Plays all sizes: 16, 33½, 45 and 78 records. Intermixes 12" and 10" records of the same speed in any sequence. Solid state stereo amplifier features powerful all-transistor circuit with "Instant-on." Three controls—Loudness Left, Loudness Right, and Bass/Treble. Two separate full-range speakers, one for Handsome, new, low-priced, Lafayette, ness Right, and Bass/Treble. Two separate full-range speakers, one for

each stereo channel, are acoustically balanced and spaced for true stereo-phonic full-dimensional sound. Includes vaco stereo turmover cartridge with diamond LP stylus. Beautiful wood cabinet with washable, scuff-resistant Pyroxylin-coated ivory texture material and "rust homespun" grill cloth. SIze: 13½H x 24¾W x 8½°D. UL Approved. For 110-120V 60 cycle AC. Shpg. wt., 25 lbs Net 54.95

25 lbs. 24 D 0226WX \$5 monthly

45 RPM Spindle for above 24 D 0220

Net 1.49

195 Dur Best Manual Phono **UL APPROVED**

MODEL L-10 4-SPEED **SOLID STATE PHONO**

- Speaker Front-Mounted for Full-Tone Sound Dispersion
 • Plays—331/4, 45, 162/4, &
- **78 RPM**
- Instantaneous ON
- Built-in 45 RPM Adapter Disc
- 2 Controls—On/Off Volume, Tone

Plays monaural records of all speeds ... 331/s. 45, 163/s and 78 RPM...all sizes 12", 7", 10". PM type speaker is set in front grille for full-tone sound dispersion. 2 controls—on/off Vol., tone Manual turntable has foam rubber mat. manual turntable has foam rubber mat. Tone arm is equipped with Vaco dual turnover cartridge with 2 synthetic sapphire needles. Attractive two tone, brown and white washable Pyroxylin coated fabric. Dim: 12½"L x 10"D x 5" high. 110-120V. 60 cycles. AC UL Approved. Shpg. wt., 9 lbs.

Net 19.95

NEW MODEL L-15 TOP-QUALITY AUTOMATIC

 BSR 4-Speed Automatic Intermix Changer with **Automatic Shut Off**

- Plays 16³/₄, 33³/₄, 45, 78 RPM Records
- Intermixes 12" and 10" Records of the Same Speed
- Powerful, Precision Engineered All-Transistor **Amplifier**
- Front-Mount Full-Range Speaker

A deluxe, automatic, portable, monaural phonograph in a beautiful two-tone platinum and white case with charcoal brown grill cloth. Plays 16½, 33½, 45 and 78 RPM records. Deluxe BSR automatic changer intermixes 12" and 10" records of the same speed. Turntable has rubber mat. Automatic shut-off after last record has been played—motor shuts off and arm returns to rest position automatically. Precision engineered solid state amplifier. Separate tone and volume controls, on-off reject switch. Front-mounted, acoustically-balanced, full-range speaker for clear tone with rich resonance. Dynamically balanced tone arm comes equipped with turnover cartridge with dual synthetic sapequipped with turnover cartridge with dual synthetic sap-phire stylus. For 110-120V, 60 cycles AC. Size: 7¾"H x 14"H x 12¾"D. Shpg. wt., 15 lbs. 24 D 0225WX \$5 monthly Net 37.95

45 RPM Spindle for above 24 D 0220

Net 1.49 UL APPROVED



24 D 0212

Lafayette Cat. No. 671


No Money Down

New! Model LSC-20 Stereo Compact Hi-Fi Phono System

FEATURING SOLID-STATE CIRCUITRY

 Famous Garrard Deluxe 4-Speed Intermix Changer With 11" Precision-Balanced Cushion Turntable

2 Rich Sounding "Jet Set" Styled 2-Way Lafayette Speaker Systems





Marvelous new stereo phonograph features solid-state circuitry combined with a new concept in high fidelity styling, the COMPACT—for enduring simplicity and unlimited flexibility. The components are mounted in luxurious oiled walnut cabinetry to enhance the decor of your home. Fresh Lafayette engineering concepts offer the listener exceptional performance at a low cost. The heart of this system is the powerful Lafayette Solid-State "Stereo 15" amplifier. This fine amplifier features 6 controls: input Selector Switch (Phono-Tuner), Volume Left Channel, Volume Right Channel, Tone Left Channel, Tone Left Channel, Tone Left Channel, Tone Right Channel, AC Power On/Off Switch plus left and right inputs for stereo tuner. Also includes front panel headphone jack for stereo headphone listening. The deluxe Garrard 4-speed automatic changer plays 7", 10", and 12" records. Intermixes different size records of the same speed. Features automatic shut-off, dynami-Marvelous new stereo phonograph features solid-state circuitry com-

cally balanced tone arm, shock mounted motor, and 11" precision cally balanced tone arm, shock mounted motor, and 11" precision cushioned turntable. Equipped with a wide range turnover stereo cartridge with diamond stylus for LP records. The two Lafayette Minuette/II speaker systems each contain a 5 x 7" woofer and a 2½" tweeter. Both speakers feature a brillance level control and have a full frequency range of 80 to 19,500 cps.—offering outstanding rich sound reproduction. Size: Main Section 19¼" L x 14½" D x 3¾" H (8" overall height to top of spindle); Speaker System: 6" W x 15½" H x 9½" D. For 110V 60 cps AC. Imported. Shpg. wt., 48 lbs.

99 D 9144WXM \$6.00 Monthly . 24 D 2301W Plastic Dust Cover For Model LSC-20 Net 8.95 24 D 0217 45 RPM Spindle for Model LSC-20 3.80

New! Deluxe LAFAYETTE Model LS-44 Solid State Portable AM/FM/FM Stereo Hi-Fi Music Center

SPECTACULAR SPACE-AGE STYLING



No Money Down

Featuring

- 4-Speed Garrard Automatic Intermix Stereo Changer
- Solid-State 12-Watt Stereo Amplifier
- 5 Audiophile Controls
- Solid State AM/FM/FM Stereo Tuner
- · Four Speakers-Two 6" Woofers, Two 31/2" Tweeters
- Diamond Needle Stylus

Made in U.S.A. UL APPROVED

Handsomely designed, deluxe solid-state, stereo hi-fi Music Center featuring an all-transistor, dual 12-watt, stereo amplifier with instant-on performance, AM/FM/FM stereo tuner and a Garrard 4-speed intermix record changer. Plays 16, 33½, 45, and 78 RPM records. Intermixes all size records of the same speed. Automatic shut off after last record has been played. 5 controls: Continuous On-Off/Loudness, Base/Treble, Balance, Vernier Tuning, and 5-position Function Selector. Tunes in FM stereo broadcasts—for thrilling full-dimensional realism as well as static-free FM broadcasts and

24 D 0217 45 RPM Spindle for above phonograph

Thrilling Stereo From Solid-State Compacts

FISHER MODEL 85-8 35-WATT SOLID STATE STEREO MUSIC CENTER

Matching Cabinets with Genuine Oiled Walnut Veneers Complete 35-watt quality high fidelity system in oiled walnut wood cabinetry at moderate cost. Compact—occupies very little space. Features 35-watt solid state stereo control amplifier, Garrard 4-speed Automatic Turntable with automatic shut-off, Pickering magnetic cartridge with diamond needle, front-panel headphone jack, lanut for stare these transfers. input for stereo tape recorder and stereo tuner. includes 2 separate matched speaker systems each containing one 8" woofer, and one 2½ tweeter. Size: AMPLIFIER/CHANGER Section: 16% "Wx4¼" Hx 13% "D, Speaker System: 17" Wx10" Hx8¾" D. For 110-120V 50/60

cps. less Dust Cover.Shpg. wt., 61 ibs. 24 D 5603 WX \$12.50 Monthly

Model PC-1 Plastic Plexiglass Cover for 85-8 and 85-10.

Net 14.95



NEW SCOTT MODEL 2502 36 WATT SOLID STATE AM-FM STEREO COMPACT

• Features Scott's Exclusive Silver Plated Front-End with Field-Effect Transistors for Superb FM Reception

A deluxe 36-watt stereo amplifier phono plus a superlative AM and FM stereo tuner. Tuner features Scott's field-effect front end for higher sensitivity. AM reception benefits from automatic variable bandwidth. FM stereo uses the time-switching method that silently and automatically adjusts the tuner to stereo operation when you tune a stereo station. Stereo light signals that this has been done. Tuning accuracy assured by accurate signal strength meter. Features Garrard automatic intermix changer and magnetic cartridge. Control section: 150x1636Wx536"H. Each speaker system: 14x834x6" features 6" woofer and 2½" tweeter. 120V-60 AC cycles. Shpg. wt.,

24 D 8305WX \$17 monthly
Plastic Oust Cover for the 2502, Shpg. wt., 2 lbs.
24 D 8307W Net 339.95 Net 19.95 No Money Down

ONLY 3

AM-FM STEREO MUSIC SYSTEM HARMAN-KARDON SC-440 SOLID STATE

36-Watt AM/FM Stereo Receiver Plus Two 10" Speaker Systems

Capture the pure and spacious sound of stereo with this fine matched component stereo music system housed in beautiful offed walnut cabinets. Powerful 80-walt AM-FM stereo receiver features bass, treble, and balance controls; contour and speaker switches; stereo treble, and balance controls; contour and speaker switches; stereo tape output and front panel stereo headphone jack. Tuner has D'Arsonval tuning meter; automatic stereo indicator light and built-in FM-AM antenna. The Garrard AT-60 automatic turntable features automatic shut-off and a high compliance stereo magnetic cartridge. Each speaker cabinet as a 10° long-excursion woofer and a 3½° curvilinear tweeter to provide full rich sound. SPECIFICA TIONS: EIA music power output: 80 watts. Frequency response: ±1 db, 15-25,000 cps. Harmonic distortion: less than 1%. FM sensitivity: 2.9 µv HIF. Multiplex separation: 30 db. Dimensions: Receiver/Turntable module, 18¼Wx16¼0x5°H. Speaker systems, each 22%HX135\max\text{k}10½°D. For 110-120 volts, 60 cps AC.

21 D 4256WX \$19 Monthly. Shpg. wt., 100 lbs. ... Plastic Dust Cover for Model SC-440. Wt., 2 lbs.

Net 19.95



AM-FM STEREO PHONO "CONSOLETTE"

NOW EVERYONE CAN ENJOY A HOME STEREO **MUSIC CENTER**

- Features AM/FM/FM Stereo Radio
- 4 Speed Automatic Stereo Record Changer

Ideal economy priced home Stereo Hi-Fi Music Center. Attractive oiled wainut wood cabinet with beautiful came grill. Features AM/FM/FM stereo radio with stereo indicator, 4-speed fully automatic intermix stereo record changer with automatic shut-off, 4 speakers, stereo balance control, vernier silde-rule tuning, full range tone control. Has output jacks for adding extension speakers. Size: S3W x 28Hx 14-0. Imported. Shpg. wt., 50 ibs. SHIPPED EXPRESS COLLECT FROM NEW YORK CITY or LOS ANGELES; NO COD ORDERS. 24 B 4807WXY \$5 monthly

To Speed Your Mail Order - Please Give Your Zip Code Number



Specialty Gift Phonos for the Family

NEW! LAFAYETTE SOLID-STATE MODEL 1-5 **4-SPEED MANUAL PHONO**



 Monaural Phono Plays both Stereo and Monaural Records of All Speeds, All Sizes

All SIZES

Ideal phono for the youngster in your family. Plays up to 12" monaural and stereo records at 16½, 33½, 45 or 78 RPM. A single lever selects any speed. "Feather-light" retractable tone arm is equipped with a single crystal cartridge. Solid state circuitry offers instant-on operation. Has volume control with on-off switch. Retractable 45 RPM chuck. Fine quality Alnico V PM speaker. Attractive blue and white leatherette covered case. For 110-120 volts, 60 cycles. Size: 11¾Wx101/4Dx5"H. UL approved. Shpg. wt., 8 lbs. 24 D 0224W

LAFAYETTE BATTERY **OPERATED 45 RPM PORTABLE MANUAL PHONO**



Only

IDEAL GIFT FOR THE TEENAGER

- Compact, Light Weight
- Plays All 45 RPM Records
- Travels With You Anywhere
- Two Tone Plastic **Traveling Case**

A new compact portable record player perfect for picnics, beaches or anywhere you go. Faithfully reproduces the sound of all your popular 45 RPM records, Completely transistorized circuitry—no warm up necessary. Operates on 2 size "C" and one 9 volt battery with low current drain. Controls: one of gear release personal adjustments (Allenset Controls). off, gear release, speed adjustment (allows for speed difference with various records). Rugged two tone plastic case and cover comes with hand strap for portability. 2½ inch speaker gives natural tone for excellent performance wherever you are. Imported, less batteries. Shpg. wt., 2 lbs. 99 D 1033

Net 9.95

BATTERIES FOR 45 RPM PHONO 99 D 6257 "C" Type—2 required Net 99 D 6021 9 Volt—1 required ... Net

SOLID STATE BATTERY OPERATED PORTABLE RADIO/PHONOS



AM RADIO/PHONO

AM-FM RADIO/PHONO

AM Radio/Phono — A great all-around performer — indoors and out. Listen to your favorite records wherever you go—school dorm, patio, or beach plus AM broadcasts. Lightweight. Features a powerful 6-transistor radio and 4" speaker of full, rich tone. Three speed turntable has

constant speed motor and starts automatically when tone arm is lifted. Weighs less than 4 lbs. Coral and Ivory plastic case, 8" wide, 11" long and 31/6" deep. Supplied with batteries, Imported, Shpg. wt., 6 lbs. Net 27.95

FM-AM Radio/Phono — Same as above but includes a quality FM radio. Imported. 24 D 4605 Shpg. wt., 7 lbs. 35 Monthly Net Replacement "C" Batteries for above radio/phonos, 6 required. Net 39.95 99 D 6257

Net ea.

PANASONIC MODEL SG-870 AC & BATTERY OPERATED STEREO PHONO



· Featuring Built-in AM/FM Radio

No Money Down Portable, Hi-Fi music system in attractive custom luggage style case. Feature a high quality AM/FM radio and a 4-speed stereo automatic record changer. Plays all sizes and speed of stereo/monaural records. Powerful "Solid State" circuitry (17-transitors, 7-diodes) produces spectacularly flawless sound. Twin 2-way full range speaker systems are in detachable enclosures, Includes two AC power cord and 6 "D" cell batteries. Size: 7% Hx181% Wx13% "D. Imported, Sppg, wt., 22 ibs. 24 D 4104WX 58.00 Monthly, 99 C 6256 Extra "D" cell batteries (6 reg.) Ea. ,13

DELMONICO PORTABLE AC/DC HOME ENTERTAINMENT CENTER



 $\mathsf{DNLY}\,229^{95}$

No Money Down

- Superb 9" UHF-VHF TV
- Quality AM/FM RadioStereo Phonograph

NO MOREY UOWN

Skillfully engineered all-in-one compact Portable Home Entertainment Center. Beautiful ebony luggage-styled case houses a 9" UHF-VHF TV, quality AM/FM Radio, and a 4-speed fully automatic intermix stereo phonograph with diamond needle. Operates on 117V 60 cps AC or with optional rechargeable Alkaline battery. 40 Transistors, 27 Diodes. Built-in telescopic antenna for VHF (TV) and FM radio, loop antenna for UHF. Two 2 x 6" high compliance speakers. Earphone for private listening. Remote speaker terminals. Size: 11½H2224x934y94"D. Imported. Shpg. wt., 27 lbs.

17 D 1717WX \$11.50 Monthly.

17 D 1709 Rechargeable Battery Pack for above. 9 lbs. Net 29.95

Lafayette Cat. No. 671

Make Lafayette Your One Dependable Source for Everything in Electronics

Model LR-1200T Super Deluxe 120 Watt Solid State FM/AM







44 Transistors, 31 Diodes Cool, Instantaneous Operation-Long Life

(A) Signal Strength Meter

- (B) 4-Position Tape Monitor
- (C) FM STEREO Indicator Light
- (D) Interstation Muting Control

LR-1200T SPECIFICATIONS

AMPLIFIER SECTION

AMPLIFIER SECTION

Power Output: 120 watts IHF; 60 watts per channel. Frequency Response: ±1db, 20-50,000 cps at 1 watt. Harmonic Distortion: less than 1% at full output; 0.125% at 1 watt. Intermodulation Distortion: 0.3% at 1 watt. Power Bandwidth: 11 cps to 38kc. Input Sensitivity: Phono (3 positions), 2 mv. low, 5 mv. med., 12 mv. high; Tape Head, 2.5 mv., Aux., 275 mv., Tape Monitor, 370 mv. Hum and Noise: —58db on Phono, Tape Head, 78db Auxiliary. Equalization: Phono, RIAA; Tape Head, NAB. Output Impedance: 4-16 ohms; low impedance stereo headphone jack. TUNER SECTION

ohms; low impedance stereo headphone Jack. TUNER SECTION

IHF FM Sensitivity: 1.5 μv. Image Rejection:
—70db. FM Signal-to-Noise Ratio: —65 db, FM, Distortion: 0.5% at 100% modulation. Capture Ratio: 4db. AM Suppression: 53db on FM. Stereo MPX Separation: 40 db at 400 cps. FM Antenna Impedance: 300 ohms balanced. AM Sensitivity: 15μv at 1000kc.

120-Watt Amplifier at 8 Ohms

No Money Down

- 4 Gang Tuning Condenser and Tuned RF Stage with 1.5 uv **FM Sensitivity**
- Interstation Muting
- Plug-in Transistors For Easy Servicing

Total solid-state circuitry creates new standards of performance. Solid state FM/AM tuner also features 4-IF/limiter stages for exceptional stability and selectivity Multiplex circuitry automatically switches to stereo when an FM stereo program comes "on". Front panel stereo indicator light positively identifies stereo broadcasts. Easily accessible variable controls adjust the degree of AFC and muting required in your location for silence while tuning between stations. Wideband AM section has separate 3-gang tuning condenser and rf stage to open up the full sound potential of standard AM broadcasting. AM antenna is built-in plus local-distance connection for FM and external AM antenna. Softly illuminated slide rule dial features balanced flywheel tuning, logging scale and sensitive signal strength tuning meter for accurate station tuning on both AM and FM. The versatile preamplifier features simple to operate, logically-grouped controls: 7 position Mode Selector for choice

- Automatic Stereo Indicator
- Center Channel Output
- Fused Output Transistors
- Beautiful Extruded Aluminum Front Panel

of stereo or mono reception; 6-position input Selector, Auxiliary, Tape Head, Phono, FM, FM Noise Filter, AM; 4-position Tape Monitor, Off, Stereo, Left and Right tape channels — enable you to listen to tape sterephonically or each individual channel sterephonically or each individual channel as it is being recorded; dual concentric Bass and Treble controls for each channel; concentric Volume/Balance controls; positive acting seesaw switches for Loudness contour, High and Low Frequency filters; Malnemote speaker selector and Power "On-Off." Other deluxe features include front panel Stereo Headphone jack, derived Center Channel Preamp Output (on rear) and 3-position Phone Santibliaty switch, Size, 16W v.5H. channel Preamp Dutput (on rear) and 3-position Phono Sensitivity switch. Size: 16W x 5H x 144 *** 0. Handsome brushed gold anodized extruded aluminum front panel with simulated walnut wood grain metal enclosure. Imported. For 117V, 50/60 cycles AC. Shpg. wt., 32 lbs.

99 D 0150WX \$12.50 Monthly Net 259.95

arrard Model

120 WATT MATCHED STEREO SYSTEM WITH MODEL

DELUXE AM/FM STEREO RECEIVER



Lafayette Model LR-1200 Deluxe 120-Watt Solid State AM-FM Stereo Receiver 259.95 Garrard Model 60 MKII 4-Speed 74.50 Automatic Turntable Pickering V-15/ATE-2 High Compliance Stereo Elliptical Cartridge With Diamond Stylus* Garrard Base For Automatic Turntable (Walnut and Ebony Color With Silver Trim) ... 4.50 Garrard Molded Plastic Dust Cover For Turntable 4.50 2 Lafayette Deluxe "Criterion 200A" High Power 3-Speaker 3-Way Speaker Systems 139.90 (Diled Walnut) Total 518.30

Deluxe Stereo System above with choice of Pickering V-15/ATE-2, Shure M44E, or Empire 888E Stereo cartridge with elliptical diamond stylus, cables and instructions. Shpg. wt., 121 lbs.
21 D 9560WXM \$19 monthly Net 399.95

Same system as above except with 2-Lafayette deluxe "Criterion 3X" acoustic suspension speaker systems (Diled Walnut) instead of 2-"Criterion 2004". Shpg.

wt., 125 lbs. 21 D 9561WXM \$22.00 monthly Net 435.95



Lafayette Cat. No. 671

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down



NEW! Model LR-900T 65-Watt Solid State AM-FM

Stereo Receiver

33 TRANSISTORS

With Case

22 DIODES

New Patented Output Transistor Protection

- 65-watts Total IHF 4-gang RF, 5-IF Stages
- All Solid State for Cool, Instantaneous Operation
- Tone Type Stereo Search Indicates Presence of Stereo Broadcasts
- Front Panel Stereo Headphone Jack
- With Attractive Metal Walnut Simulated Wood **Grain Case**

Capture the sound of concert hall stereo, in your living room! Full compliment of controls puts you in complete command of every program source. Features: Sensitive Nuvistor front end; "Stereo Search" function offers a simple and fast means of locating FM stations which are broadcasting a stereo program. Ingenious new patented electronic circuit-breaker protects the output transistors from burning out during shorts and no-load conditions. Illuminated signal strength meter and easy-to-read slide rule dial for precision tuning; Smooth flywheel action; Illuminated selector indicator jewels on front panel show external program sources. Mode Selector switch on front panel show external program sources. Mode Selector switch allows choice of outputs, Left Channel, Right Channel, Stereo, Multiplex and Reverse. Input Selector controls access to; AM, FM, FM Stereo Tuner, Phono, Tape and Auxiliary program sources. The Audio

SPECIFICATIONS—Tuner Section. Tuning Range: FM: 88-108mc; AM: 550-1600kc. Antenna: Balanced Input for external 300 ohm FM antenna; Built-in Ferrite bar AM antenna. Signal-to-noise ratio: 60db at 100% modulation. Image rejection: —55db. If rejection: —100db. Capture ratio: 2.5db. Harmonic distortion: .6%. MPX Channel Separation: 35db at 4000cps. Cross Modulation: —86db. MPX Moise Filter: 10 db or better at 10,000cps. Amplifier Section. Power Output: 65

Himinated tuning meter for FM and AM.

No Money Down Modern positiveacting Rocker Switches.

Colored Light - Indicators

Control Center features separate friction-lock Bass and Treble controls for each channel, Balance control; Rumble and FM Noise filter; Loudness switch and front panel Stereo Headphone jack-Speaker "OFF" switch for private listening. Tape Monitor lets you listen to recorded material as you tape it. Inputs are provided for Tape head, Magnetic, Crystal or Ceramic phono cartridges and Auxiliary (high level) sources. Has built-in ferrite bar AM antenna, terminals for 300-ohm FM twin-line. Fused AC power cord. Gold anodized extruded aluminum front panel, with matching metal walnut simulated wood grain case. Size: 16½Wx12½Dx4½"H. Imported. Shpg. wt., 21 lbs. For 117V, 50/60 cycles AC.

99 0 0157WX \$10.00 monthly

watts, 32½ per channel IHF at 8 ohms. Total HD: at 1 watt 0.25%. Frequency Response: ±2db 20-20,000cps at 1 watt. Channel Separation: 53db at 1,000cps. Hum & Moise: Phone —55db; Auxiliary: —73db. Power Bandwith: 30-20,000cps. Sensitivity: Phone: Magnetic 1.5mv; Ceramic 90mv; Tapehead 2.3mv; Auxiliary 120mv. Equalization: RIAA (phono) ±2 db; NAB (tape) ±2db. Output Impedence: for 4.16 ohms.

65 WATT MATCHED STEREO SYSTEMS WITH MODEL LR-900T SOLID STATE STEREO RECEIVERS





from Individual Catalog Prices

Lafayette Model LR-900T 65-Watt	
Solid State Stereo Receiver	199.95
Garrard Model 40 MKII 4-Speed	
Automatic Record Changer	44.50
Pickering V-15/AT-2 Diamond Needle	
Stereo Cartridge*	24.95
Garrard Base For Automatic Record Changer	24.33
(Walnut and Ebony Color With Silver Trim)	4.50
Garrard Molded Plastic Dust Cover For Record Changer	4.50
2-Lafayette "Criterion 50" Wide Range 2-Way Bookshelf	- 4.50
and/or Floor Speaker Systems (Oiled Walnut)	
and/or riod speaker systems (offed Walnut)	59.90
Total 3	38 30

Complete 65 Watt stereo system above with *choice of Pickering V-15/AT-2, Shure M44-7 or Empire 888 diamond needle stereo cartidge. Includes speaker cable. Shpg. wt., 94 lbs.
21 0 9552WXM \$13.50 monthly Net 272.95

Same stereo system as above except with 2 Lafayette "Criterion 100A" deluxe 2-way tuned ducted port shelf or floor speaker systems instead of 2 "Criterion 50" systems. Shpg. wt., 98 lbs. 21 0 9563WXM \$15 monthly SAYE 68.35 FROM INDIVIDUAL CATALOG PRICES

NEW Model LR-450T 30 Watt Solid State FM Stereo Receiver





30-Watt Stereo Amplifier

- Tone Type Stereo Search (Audio Indication of Presence of Stereo Broadcast)
- Front Panel Stereo Phone Jack
- 4-Gang RF, 5-IF Stages for 2μν Sensitivity and Excellent Selectivity
- Illuminated Selector Function Indicator Jewels
- Patented Protective Overload Circuit

accidental shorts in amplifier circuitry. High frequency-type power transistors assure extended range response even at full rated output. The beauty of the gold anodized extruded aluminum front panel is enhanced by a large easy-to-read rule dial, and precision signal-strength "tuning" meter for accurate station tuning with smooth flywheel action. Colored lights on dial face show at a glance your external program source (Phone, Tape Head, Aux). Front panel features a full set of easy-to-operate controls. These include: Tuning, Volume, Balance, dual concentric Bass and Treble and 5-position Salector switch. Sturdy seesaw type switches are used for Loudness, Model (Stereo, Mono), Speaker On-Off, Power. Size: 1514/W414/3HX 111/2"O. Imported. Shpg. wt., 18 lbs. For 117V, 50/60 cycles AC. 99 D 0158WX \$8.00 monthly Net 159.95

4kc. Amplifier Section, Power Output: 30-watts, 15-watts per channel IHF at 8 ohms. Harmonic Distortion: .3% at 1 watt. Frequency Response: ±2db 30-20,000cps. Signal-to-Noise: —65db, Sensitivity: Phono: Magnetic 2.5my; Ceramic 90my; Auxiliary 200mv. Equalization: RIAA (phono). Output Impedance: 4-16 ohms.

Instantaneous Surge of Power! Pure, unyielding "Solid" power with no faltering at the high or low ends of the response range. Plus cool, instant hum-free operation producing realistic sound at a realistic price. Enjoy the sound sensation of crystal clear FM or PM stereo. Since there are no tubes to deteriorate, the LR-450T's life is a long, dependable one. Compact circuitry gives you 30-watts of pure dynamic music power at 8-ohms! The tuner section features the dependable "Stereo Search" circuit to audibly signal the presence of FM Stereo Broadcasts. 5 FM IF stages, excellent selectivity, stereo separation and rejection of signal interference. The LR-450T has 49 of the finest semi-conductors for virtual elimination of heat, and thermal noise; instant operation with no warm-up needed; patented protected overload circuit, prevents transistor destruction due to

SPECIFICATIONS—Tuner Section. Tuning Range: 88-108mc. Antenna: Balanced input for external 300 ohm FM antenna. IHF Sensitivity: 2µv. Signal-to-noise ratio: 60 db at 100% modulation. Image Rejection: —55db. IF Rejection: —100db. Capture Ratio: 3db. Harmontc Distortion: 1% at 100% modulation. MPX Channel Separation: 35db at 400cps. Cross Modulation: —86db. MPX Noise Filter: 6.5db at

30 WATT MATCHED STEREO SYSTEMS WITH MODEL LR-450T SOLID STATE STEREO RECEIVER



from Individual Catalog Prices

Lafayette Model LR-450T 30-Watt	159.95
Solid State Stereo Receiver	133,33
Garrard Model 40 MKII 4-Speed	44.50
Automatic Record Changer	44.50
Pickering V-15/AT-2 Diamond Needle	
Stereo Cartridge*	24.95
Garrard Base For Automatic Record Changer	
(Walnut and Ebony Color With Silver Trim)	4.50
Garrard Molded Plastic Dust Cover For Record Changer _	4.50
2-Lafayette "Criterion 50" Wide Range 2-Way Bookshelf	
and/or Floor Speaker Systems (Oiled Walnut)	59.90
Tota	1 200 20

30-watt solid state stereo system above with *choice of Pickering V-15/AT-2, Shure M44-7, or Empire 888 diamond needle stereo cartidge, complete with speaker cable. Shpg. wt., 92 lbs. 21 D 9554WXM \$11.50 monthly Net 239.95

Same stereo system as above except with 2 Lafayette "Criterion 100A" deluxe 2-way tuned ducted-port shelf or floor speaker systems instead of 2 "Criterion 50" systems. Shpg. wt., 96 lbs.
21 D 9555WXM \$13.50 monthly Net 266.95

SAVE 61.35 from individual catalog prices



AFAYETTE Stereo High Fidelity

30 Watt Stereo Systems With Model LA-224T Solid State Stereo Amplifier

Lafayette Model LA-224T 30-Watt Solid State Stereo Amplifier 59.95
Lafayette Model AC-66 Automatic Record Changer with
Pickering PA-C1 Magnetic Cartridge and Diamond Stylus 37.95
Wood Base for Record Changer (Giled Walnut) 3.95
2 Lafayette "Criterion 20A" 2-Way Ducted Port Shelf Speaker
September (Giled Walnut) 44.50

44.50 Systems (Oiled Walnut) TOTAL 146.35



2-Lafayette 'Criterion 2D"A"

SYSTEM PRICE ONLY 11995

No Money Down

Complete 30 Watt stereo system as above with speaker cable. Shpg. wt., 42 ibs. 21 D 9143WXM \$6.50 Monthly Net 119.95 Same system as above except with 2 Lafayette "Criterion 50" wide range 2-way bookshelf or floor speaker systems (oiled walnut) instead of 2 "Criterion 20A" systems. Shpg. wt., 82 lbs. 21 D 9123WXM

21 D 9123WXM \$7.50 Monthly Net 132.50 You Save 30.05 from Individual Catalog Net 132.50

Model LA-224T 30-Watt Solid State Stereo Amplifier

New! All the characteristics of a quality solid state Hi Fi amplifier have been incorporated into the LA-224T. Attractive slim styling permits unrestricted placement of this unit in the home. 30-watts power supplied through the use of 19-transistors 8-diode circuitry for: instant cool operation; low current drain; minimum distortion (1% or less at 1 watt at 1 kc); excellent frequency response (30-20,000 cps +2db at 1-watt). A full complement of front panel controls have been provided for maximum stereo capability. Dual Concentric Volume, Bass and Treble controls allow independent level control over each channel. Mode switch controls Mono. or Stereo poeration. Selector switch determines external music Volume, Bass and Treble controls allow independent level control over each channel. Mode switch controls Mono, or Stereo operation, Selector switch determines external music source: Phono; Tuner; or Auxiliary positions. An additional switch has been provided for speaker or headphone listening. Rear panel features an AC convenience outlet; tape recorder output jacks; input jacks for Magnetic, Crystal or Ceramic cartridges; Dutputs for 4, 8 and 16 ohm speakers. Attractive, brushed aluminum, gold anodized extruded front panel with complimentary metal case. Size: 1014Wx3%,6Hx71%."D. Shpg. wt., 9 lbs. Imported. For 110 to 125V., 50/60 cycles AC. \$5.00 monthly

2-Lafayette "Criterion 50" 60 Watt Stereo Systems With Model LA-60T Solid

State Stereo Amplifier

Lafayette Model LA-60T 60-Watt Solid State Steree Amplifler Garrard Model 40 MKII 4-Speed Automatic Record Changer Pickering V-15/AT-2 Diamend Needle Steree Cartridge* Garrard Matching Changer Base (Walnut and Ebeny Color

with Silver Trim) Garrard Molded Plastic Dust Cover for Record Changer 2-Lafayette "Criterion 50" Wide Range 2-Way Bookshelf and/or Floor Speaker Systems (Diled Walnut)

59.90

44.50 24,95

4.50



From Individual Catalog Prices!

SYSTEM PRICE

no money down

TOTAL 238.30 Above Stereo system with *choice of Pick-ering V-15/AT-2, Shure M44-7 or Empire 888 diamond needle stereo cartridge, complete with speaker cables. Shpg. wt., 88 lbs. 21 D 9634WXM \$10.00 monthly Net 189.95

Same 60-watt system above except with 2-Lafayette "Criterion 100A" deluxe ducted port 2-way bookshelf or floor speaker sys-tems (oiled walnut) instead of 2-"Criterion 50" speakers. Shpg. wt., 92 lbs. 21 D 969SWM \$11.00 monthly ... Net 216.95 You Save 51.35 from individual catalog

prices.



2-"Criterion 50" ure M44-7 Empire 888

2 - "Criterion 100A"

50 Watt Stereo Systems With

Model LA-248 Solid State Stereo Amplifier

Lafayette Medel LA-248 50-Watt Selid State Steree Amplifier Garrard Medel 40 MKII 4-Speed Automatic Record Changer Pickering V-15/AT-2 Diamend Needle Steree Cartridge* Garrard Matching Changer Base (Walnut and Ebeny Color with Silver Trim) 4.50 Garrard Molded Plastic Dust Cover for Record Changer 4.50
2 Lafayette "Criterion 50" 2-Speaker, 2-Way Ducted
Port Bookshelf and/or Floor Speaker Systems (Oiled Walnut) 59.90

Complete 50 watt solid state system above with choice* of Pickering V-15/AT-2, Shure M44-7, or Empire 888 diamond needle stereo cartridge, with necessary speaker cable. Shpg. wt., 85 lbs. 21 D 9128WXM \$9.00 Monthly

Same as above except with 2 Lafayette "Criterion 100A" deluxe 2-way speaker systems (oiled walnut) featuring 10" woofer with 1 lb. magnet, 4" closed-back tweeter, tuned tube-type ducted port, and brilliance control on rear of cabinet, instead of 2 "Criterion 50" systems.

Shog, wt., 89 lbs. 21 0 9129WXM \$11.00 Monthly You Save 51.35 from Individual Catalog Prices

SYSTEM PRICE

No Money Down

Model LA-248 50-Watt Solid State Stereo Amplifier

The LA-248 is an all transistor 50 watt integrated stereophonic preamplifier/amplifier in one compact and smartly designed unit. All transistor design offers instant warm-up, low current consumption, cool operation, low distortion and noise (—74db), excellent transient response, and wider frequency response (20-20,000 cps ±1 db at 1-wat1) inputs for all types of stereo/mono music sources: Magnetic and ceramic cartridges; tape head; tuner and auxiliary. Two pair of output terminals have been provided for 4, 8 and 16 ohms impedence speakers and tape recorder. A full range of controls allows complete flexibility of operation: 5-position selector switch; mode switch; volume, bass, treble controls. Five rocker switches for: Loudness, rumble filter, scratch filter, speakers Off/On (for headphone listening), power Off/On. Also features front panel headphone jack. Rear panel features a speaker phasing switch and two auxiliary AC outlets. Housed in brown: extured metal case, gold anodized extruded aluminum panel and knobs. Size: 13%,4%/4%hx103%*0. Shog. wt., 18 lbs. Imported. For 110-125V., 50/60 cycles AC.

90 D0025WX No Money Down \$5.00 Monthly Net 84.95

... No Money Down. \$5.00 Monthly





Empire 888

90 Watt Solid State Stereo Systems With LA-90T

Lafayette Model LA-90T 90-Watt Solid State Steree Amplifier Garrard Model 40 MKII 4-Speed Automatic Record Changer Pickering V-15/AT-2 Diamond Needle Steree Cartridge* Garrard Matching Changer Base (Walnut & Ebony

Color with Silver Trim) 4.50 4.50 Garrard Meided Plastic Dust Cover for Record Changer 2-Lafayette "Criterion 50" Wide Range 2-Way Bookshelf and/or Floer Speaker Systems (Oiled Walnut) 59.90

Total 268.30

Above system with choice* of Pickering V-15/AT-2, Shure M44-7 or Empire 888 diamond needle stereo cartridge, complete with speaker cable. Shpg. wt., 88 lbs. 21 D 9566WXM _________\$11.00 Monthly _______ Net 219.95

Same system as above except with 2 Lafayette "Criterion 200A" speaker, 3-way systems (oiled walnut) featuring 12" woofer with 1 lb. magnet, 3" dome tweeter, 8" midrange speaker, "tuned" tube type ducted port, brilliance controls and presence controls, instead of 2 "Criterion 50" systems. Shpg. wt., 102 lbs.

21 0 9570WXW Net 291.95

You save 56.35 from individual catalog prices

ure M44

SYSTEM PRICE **Q**95

no money down

New! Model LA-90T 90-Watt Solid State Stereo Amplifier

Deluxe Lafayette solid state 90 watt single chassis pre-amplifier and amplifier. The LA-90T Detuke Larayette solid state 90 wart single chassis pre-amplifier and amplifier, the LA-90T solid state circuits will give you many years of trouble free use. The LA-90T provides maximum flexibility; one large selector knob permits you to choose Tape Head, Phono 1, Phono 2, Tuner and Auxiliary positions. Mode control selects Balance, Left or Right Channels, Mono, Stereo Reverse and individual Left and Right Inputs. Five quality rocker switches for: Extension speakers, Low filter, High filter, loudness control for aural balance at low volume levels, and monitor that lets you listen to tape during recording. This switch is also used for playback.

Balance/Volume, Treble/Bass controls are concentric for easy operation on both channels. The rear panel provides you with 10 inputs and 4 outputs: Left and Right channels for Magnetic/Ceramic cartridge; Tape head for direct connection to a tape deck that does not have a pre-amplifier; Tuner; Tape Record; Tape Play output. Left and Right channel speaker connections permit the use of 4, 8 and 16 ohm speakers. IHF Music Power: 90 Watts total at 8 ohms, frequency response: 30-50,000 cps ±2db at 1-watt.

Special extension speaker terminals are provided for remote placement of speakers anywhere in your home. Built-in electronic short circuit device, prevents accidental shorting at speaker terminals. Smartly styled all metal cabinet finished in simulated wainut wood grain, plus non-tarnishing, gold anodized extruded aluminum front panel. Size 13Wx3¾Hx9¾***0. Shpg. wt. 15 lbs. Imported for 117V 50-60 cycle AC. \$7.00 monthly



2-"Criterion 200A"

AM/FM Stereo Tuner

FAYETTE NEW! Model LT-325T Solid State **AM/FM Stereo Tuner**



IHF FM Sensitivity of 2μV.

IF Rejection of Better than -55db... More Signal, Less Noise

Dependable Tone-Type Stereo Seach

Offering extended versatility, the LT-325T features a positive Automatic Stereo Search that signals whenever you tune to a stereo station. The LT-325T may proudly grace an open shelf with its hand-

station. The LT-32ST may proudly grace an open shelf with its handsome brushed aluminum, gold anodized, extruded front panel and
simulated walnut wood grain case. Or it may be built-in without fear
of heat damage since there are no heat producing tubes. On the front
panel there are large, easy-to-tune knobs for tuning, selection (AM.
FM, MONO, FM STEREO), stereo search, MPX filter, and power.
Tuning is simplified and made positive by a tuning meter. Built-in
AM loopstick; balanced 300½ FM antenna input has distant-local
connections. Imported. Shpg, wt., 11½ lbs.

99 0 0159WX \$5 Monthly

Net 99.95

Illuminated Tuning Meter For Precise Tuning

No Money Down

18 TRANSISTORS 17 DIODES

SPECIFICATIONS

FM Sensitivity, IHF: 2,47; FM Frequency Response: 20-15,000 cps ±2 db; Capture Ratie: 3 db; S./N: 60 db at 98 mc (100 % modulation); Art. Channel Selectivity: 42 db; Steree FM Separation: 35 db at 400 cps. SCA Rejection: 40 db; Steree Neise Filter: —10 db at-10 kc; Antenna Input: 300!? balanced; FM Frequency Brift; less than ±50kc. Tone-type stereo search. AM Sensitivity: 1 mv input = 0.6 volts ±2 db at 400 cps. 30% modulation output. 1a transistors. 17 diodes. 50/60 cps—117 VAC. Size: 13Wx3¾x9¾°0.



3-Gang Tuning Condenser with Tuned RF Stage for Excellent Sensitivity and Selectivity





MODEL LT-250A FM STEREO TUNER

- Built-in FM Multiplex with 38 DB Stereo Separation
- Stereo Mode Indicator, Tuning Eye, Stereo Search Frequency Response, 20-20,000 Cycles
- Low Silhouette Styling

Remarkable, quality performance and styling that will delight both eye and ear! Features positive multiplex station identity, low noise front end, tuning eye, flywheel tuning, and stereo dimension control. Stereo Channel Separation: 38 db at 400 cps; Distortion: less than 1%; Tubes: 12 plus 8 dlodes. Extruded aluminum front panel with matching knobs and metal case complement its fine electrical specifications. Size: 1234W4%Hx9½*D, For 117V 50/60 cps AC. Imported. Shog. wt., 13 lbs.

Net 74.95 99 D Q131WX S5 Monthly

MODEL LT-100B AM/FM TUNER

- AFC Defeat for Tuning Weaker Stations
- FM Multiplex Output Jack
- 7 Tubes (3 Dual Purpose) 10 Tube Performance -
- FM Ratio Detector Plus Limiter
- Grounded Grid RF Stage
- AFC for Tuning Simplicity Locks in Stations

Features a powerful grounded grid RF stage, FM Multiplex output jack, flywheel tuning, large illuminated slide rule dial, built-in AM ferrite loop antenna and 4-position selector switch. FM SPECI-FICATIONS Sensitivity: 3 µv; Frequency Respense: 20-20,000 cps ± 1 db; Harmonic Distertion: less than 1% at 400 cps. Low silhouette metal enclosure with brown finish contrasts with the gold anodized extruded aluminum front panel. Size: 12%Wx47/4Hx91/2°D. For 110-125V 50/60 cps AC. Imported. Shpg. wt., 15 lbs. 99 0 0134WX \$5 Monthly Net 59.95

MULTIPLEX ADAPTER KIT KT-220

- 30db Separation at 400 Cycles
- Self-Powered
- Ideal for Lafayette Tuners Equipped with MPX Output Jacks


Enjoy thrilling FM'Stereo from any Lafayette FM tuner or any other quality wide-band FM or AM-FM tuner. Self powered, the KT-220 easily connects to the built-in multiplex jack on your tuner and special instructions are provided for connection to tuners without multiplex jacks. Prealigned coils require minimum adjustment. Provides 30 db separation at 400 cps with less than 1% distortion. Beige front panel with ivory trim and brown cabinet. Size: 8½WX 4½BX4½"H. For 110-125V 50/60 cps AC. Shpg. wt., 4 lbs. 19 D 0907

Hi-Fi Components Arc Available on Easy Pay Plan-No Money Down

Transformer Power Supply

World Famous Fisher Hi-Fidelity Components

NEW FISHER MODEL 220-T 55 WATT SOLID STATE AM-FM STEREO RECEIVER



Less Case

No Money Down

- Fisher Neo-Synchrode Front-End with FET
- Fisher Guard-O-Matic Overload Protection Circuit
- Fisher Stereo Beacon Indicates Stereo Stations

An outstanding new receiver combining superb AM and FM/FM stereo reception facilities, and a powerful 55-watt (IHF) stereo amplifier in a beautifully integrated compact chassis. Features solid state circuitry with famous Fisher design. The highly sensitive and selective tuner section featuring the exclusive Neo-Synchrode front-end with FET, also employs 4 IF stages, 3 limiters, and a wide-band ratio detector. The time-division multiplex section features the exclusive Fisher Stereo Beacon which automatically switches the set to stereo or mono operation in response to the type of signal being received. 24-carat gold plated front panel. 4-position selector switch (Phono, FM Auto, AM, Aux.), Muting switch for elimination of interstation FM noise. Specifications: Music Power (IHF): 55 watts @ 4 ohms, 40 watts @ 8 ohms; Power Bandwidth (IHF): 28-30,000 cps; Usable Sensitivity (IHF): 2.5 µv; Harmonic Distortion: 0.8%. Dimensions: 15½W x 4½H x 11°D. Shgs. wt. 17½ bs. Shog. wt., 174/2 lbs. 21 D 3300WX \$15 monthly

Walnut wood cabinet for Model 220-T. Shpg. wt., 6 lbs.

DELUXE STEREO HI-FI MUSIC SYSTEM FEATURING THE FISHER MODEL 220-T



COMPLETE SYSTEM ONLY

No Money Down

You Save

Frem Individual Catalog Prices

A money saving system that lets you enjoy the thrill of beautiful stereo music reproduction. Consists of the new Fisher 220-T Solid State 55-watt AM-FM Stereo Receiver (less case), new Garrard Model 40 MK/II 4-speed automatic record changer with Garrard base, choice of Pickering V15AT-2, Empire 888, or Shure M-44-7 Stereo Cartridge, and 2 Lafayette Criterion 50 True 2-way Bookshelf type speaker systems (oiled wainut finish). Shpg. wt., 84 lbs. 21 D 3301WXM \$19 monthly Net 382.58

NEW! DELUXE MODEL R-200-B 5 BAND TRANSISTORIZED AM/FM/FM STEREO/SW TUNER



ONLY less enclosure No Money Down

ENJOY:

FM MONO, FM STEREO, AM. MARINE-WEATHER. SHORT-WAVE

FREQUENCY BANDS OF THE R-200-B Band Meters (M) Range (MC) FM (Frequency Modulation) 3.4 to 2.8 87.5 to 108 MW (Medium Wave AM) 590 to 184 0.51 to 1.63 LW (Long Wave) 2000 to 850 0.15 to 0.35 SW (Short Wave) 18 to 43 7.0 to 16.5 SW 49-Meter Band 48 to 51 5.9 to 6.3

Deluxe, high quality, transistorized 5 band tuner offering a broad coverage of world-wide entertainment programs. Incorporates superb reception facilities for FM/FM Stereo, and 4 AM broadcast bands (see chart). The highly sensitive and selective FM section—1.8 µV sensitivity—features the Golden Synchrode nuvistor front-end, exclusive Stereo Beacon, 3 position inter-station muting control, illuminated d'Arsonval tuning meter, and a wide band ratio detector. AM/Multi-band section features tuned RF stage, 3-stage operated AGC for elimination of fading, 3 position AM bandwidth selector, and AM ferrite antenna for MW and SW. Dimensions: 15½ "W x 4½, "H x 1½". Shore, wt. 18½ lbs. x 11 1/2 "D. Shpg. wt., 18 1/4 lbs. 21 D 3307WX \$15 Monthly

Custom Oiled Walnut Cabinet for R-200-B. Shpg. wt. 6 lbs. 21 D 3641W

FAMOUS FISHER K-10 "SPACEXPANDER"



add a thrilling dimension to your listening pleasure with the glorious sound of reverberation.

Add concert hall realism to your listening area. Supplies the reverberation normally heard in an acoustically perfect concert hall. Samples sound output from amplifier, and reinjects the same sound after a short time delay thus adding the reverberation effect. May be used with any mono or stereo home music system using separate pre-amplifiers or tape monitoring facilities. Connects to any signal from 0.2 to 5.0 volts. Simple to operate and easy to install. Tubes: 2-12AX7, 1-7247 plus a selenium rectifier. Size: 9%, LX11%, WX67% "H. Shpg. wt., 8 lbs. 21 D 3650 S5 monthly Net 71.55 \$5 monthly.

Hi-Fi Components Are Available on Easy Pay Plan-No Money Down

Lafayette Cat. No. 671 21

SCOTTO Solid State AM-FM Stereo Receivers

Offer These Outstanding Features

- . Silver Plated FET Front End
- Silicon Output Transistors
- · All Silicon I.F. Amplifier
- · Stereo Indicator Light
- Automatic Stereo Switching
- Front Panel Phone Jack
- · Automatic AM Wide-band Switching



MODEL 388 120-WATT AM-FM STEREO AMPLIFIER

Music Power: 120 watts @ 4 ohms 100 watts @ 8 ohms

No Money Down 449⁹⁵

less enclosure

Expertly engineered unit provides the superb advantages of solid

Custom oiled wainut wood cabinet for 388. Shpg. wt., 8 ibs. 21 D 6063W Net 26.95


000

MODEL 382 65-WATT AM-FM STEREO RECEIVER

Music Power: 65 watts @ 4 ohms

50 watts @ 8 ohms

No Money Down 2995



The Scott model 382 combines a superb solid state AM/FM tuner with a powerful 65 watt IHF solid state amplifier on one handsome chassis. Features field Effect Transistor (FET) silver plated front end, and wide-range transformerless output. Controls: dual loudness, end, and wide-range transformerless output. Controls: dual loudness, separate bass and treble controls, tuning, stereo/mono Mode switch; Tape Monitor; Noise filter, Speaker On/Off; front panel stereo head-phone output; stereo indicator light gives positive indication of stereo and automatic stereo switching. Specifications: Music power rating (IHF Standard & ohms) 65 watts. Harmonic distertion: 0.8%. Frequency response: ±1 db, 18-25,000 cps. Hum and Moise: —55db. Stereo Separation: 35 db. Tuner usable sensitivity: 2.2 µv. Cross modulation rejection, 80db. Capture ratio, 3.0db Power requirements: 105-120V, 50/50 cycles AC. Size in case: 15½wx5¼Hx 13¼°0. Shpg. wt., 19 lbs.

21 D 6082WX

Custom oiled walnut wood cabinet for 382, Shpg. wt., 5 lbs. 21 D 0024W Net 22.50

 SCOTT-GARRARD-LAFAYETTE AM-FM MUSIC SYSTEM Featuring Scott 382 65-Watt AM-FM Stereo Receiver Choice Of Stereo Cartridge Shure M44-7 **Complete System** 369⁹⁵ No Money Down YOU SAVE 6385 from individual component prices

Spectacular stereo reproduction! Specially selected component Mi-Fi music system consists of new Scott 65-watt AM-FM Stereo Receiver (less enclosure), new Garrard Model 40 MK-11 4-speed automatic stereo record changer with Garrard base, choice of Pickering V15/AT-2, Empire 888, or Shure M44-7 diamond needle stereo cartridge, and 2 Lafayette "Criterion 50" true 2-way bookshelf type systems (olled walnut finish), Shpg. wt., 88 lbs. 21 D 6085CWXM \$19 monthly Net 368.85

Best Selling LAFAYETTE Speaker and Headphones

LAFAYETTE "MINUETTE/II" 2 WAY HI-FIDELITY SPEAKER SYSTEM Only 1/195



Room Filling Music Everywhere In Your Home

Shelf Size-6"W X 15%"H 9%"D

 Genuine Oiled Walnut Finish on 4 sides

ally fine musical quality yet measures only 6Wx157kHx91h**D. Small enough to fit anywhere. Superb oiled walnut finish on 4 sides, allows placing speaker horizontally or vertically. Frequency response: 80 to 19,500 cps. Features adjustable level control for brilliance. Impedance 8 ohms, Rated at 10 watts. Imported, Shpg. wt. 8 lbs.

99 D 0171W

Set of Two For Stereo -**SAVE 1.40**

Net 28.50

Widely Acclaimed by Hi-Fi Critics

NEW IMPROVED MODEL SK-58A 12" COAXIAL SPEAKER



Now Even better Than The Widely **Acclaimed Original SK-58**

- 1¼ Lb. Magnet Weight
- Response: 30-15,000 Cps.
- Built-In LC Network

Provides a truly faithful reproduction of sound without any "coloration" or distortion. Coaxially-mounted horn-type tweeter provides brilliant, distortion-free reproduction of high frequencies with no back radiation. Built-in 3000 cps. crossover network contributes to the provided by the contribute of the contribute Built-in 3000 cps. crossover network contributes to the smooth delivery and overall wide range response. Woofer features a heavy, high flux density magnet and 34" wide sheepskin cone-edge suspension for higher efficiency and richer bass. Rugged cast metal frame will not resonate. Supplied with brilliance level control. Woofer Resonance: 40 cps. Power Handling Cap.: 20 watts continuous, 35 watts peak, Imped. 8 ohms, Imported, Shpg. wt., 11 lbs.

99 0014W Net 29.95

Lafayette "Minuette/II" Hi-Fi Speaker System will bring music to any room in your home—and for a remarkably low cost. Designed for use where space is at a premium—ideal for the small apartment or listening area. Expand your stereo system to other areas of your home ... easily used in the den, kitchen, patio or bedroom. Employs a specially designed 5x7" woofer, electrical crossover at 8,000 cps. plus a 2½" tweeter in a ducted-port bass reflex type enclosure. Provides an exception-REVERBERATION AMPLIFIER AND SPEAKER SYSTEM

Enjoy A New Dimension in Sound

only 24⁹⁵

Brilliance Level Control

2½" Tweeter

Speakers-5"x7" Woofer.

Lafayette "Minuette/II" Hi-Fi Speaker



- Ideal for existing Stereo or Mono Systems
- Self-Contained Amplifier/Speaker System with Built-in Power Supply

A compact space saving self-contained reverberation amplifier speaker system that works with your existing component Hi-Fi system, AM or FM radio, tape recorder to bring the realism of concert hall sound to your listening area. Thrill to this new dimension in sound, 3-tube amplifier delivers 2½ watts to a 6½" PM speaker. Inputs provided are stereo/mono high level and stereo/mono low level. For use with 110-117 volts, 50-60 cycles per second AC. Unit is finished in a deluxe, beautiful oiled walnut cabinet which measures 11½, WR7%HX5%"D. Imported. Shpg. wt., 7 lbs.

98 D 0146W

Net 24.95

25 FT. UNIVERSAL STEREO HEADPHONE EXTENSION CORD



Listen to stereo through your favorite stereo headphone anywhere in the room. Ideal for use with Lafayette, Koss, Superex, Jensea, Sharpe and many other headsets. Flexible 3-conductor cable, grey vinyl jacket, 25 ft. in length. With a ¼" 3-circuit plug on one erd a 3-circuit jack on the other end. Imported. Shpg. wt., 1 ib.

To Speed Your Mail Order - Please Give Your Zip Code Number


FAMOUS LAFAYETTE F-767 STEREO HEADPHONES

Cushioned Headband Soft Foam Rubber Ear Cushions for Maximum Comfort and Bass Response

Air

High Sensitivity

Only



Our famous best selling quality stereo headphones, widely acclaimed by HI-FI critics, offer outstanding stereo sound reproduction to the listener. Extremely comfortable headband is covered with an air-filled vinyl bag which serves as a gentle cushion. Soft foam rubber ear pads keep out external noise and provide maximum bass response. Two specially designed full range 2½" speakers are precisely matched to each ear cup. Complete with atached stereo phone plug, overload junction box, 5 ft. cord, and instructions. Frequency Response: 30-15,000 cps. Impedance: 8 ohms per phone. Imported, Shpg, wt., 2½ lbs. 99 D 0035 Net 11.88

Stereo headphone Control box for F-767 Permits switching from speakers to stereo phones. Imported. Shpg. wt., 2 lbs.

Lafayette Cat. No. 671

www.americanradiohistory.com




AFAYETTE Professional Styling...Brilliant

5 Year Guarantee =

A Lafayette quality product that is guaranteed against defects in material and work-manship for 5 years. If this unit fails to operate due to such defects, simply return it prepaid with your original sales slip or order. Lafayette will repair it without charge including return transportation.

NEW LAFAYETTE Criterion® 20A THE "MINIATURIZED" SPEAKER SYSTEM!





Hardly bigger than a table radio, yet offers astonishing high fidelity reproduction! The rich deep-down bass must be heard to be believed—gives you excitingly real sound—fits anywhere . . . on a bookshelf . . . table . . . even on a wall! Comes finished on all lieved—gives you excitingly real sound—fits anywhere . . . on a bookshelf . . table . . even on a wall! Comes finished on all four sides in a rich, hand-rubbed oiled walnut veneer, tastefully framed in an ebony and gold picture frame molding with white gold acoustic grille material. A powerful 5" woofer equipped with a large magnet and voice coil provides high efficiency and power capability. A 6 db per octave L-C crossover network transfers power to a newly developed 4" mid-range/high frequency unit which provides brilliant highs. Power Rating: 20 watts program material. Frequency Response: 45 to 20,000 cps. Crossover frequency: 2800 cps. Nominal Impedance: 8 ohms. Imported. Shpg. wt., 8 lbs.

99 D 0166W Criterion 20A \$5 Monthly

Net 22.95

NEW " Criterion® 30" COMPACT 2-WAY BOOKSHELF SYSTEM





3495 Only

2 for 68.50


- 5" High Compliance Woofer Plus 3" Tweeter
- Overall Response 35-19,000 CPS.
- 25 Watt Power Capacity
- 1,200 CPS Crossover

A brilliantly sounding, moderately priced, compact speaker system featuring a specially engineered 5" woofer with a 1 lb. magnet perfectly matched to its compact enclosure. Its plasticized cone and high compliance suspension provides full, rich bass response down to 35 cycles. A 3" cone-type direct radio tweeter extends the frequency range to 19,000 cycles. A 6db/octave crossover network smoothly transfers the sound energy at 1,200 cycles. The deluxe bass reflex enclosure features a ducted tube-type port for smooth, peak-free frequency response. Has tweeter level control. Hand-rubbed oiled walnut finish on all 4 sides. Grille trimmed with ebony and gold frame molding. Size: 14Wx8Hx8"O. Impedance, 8-ohms. Imported. Shpg. wt., 13 lbs. 8-ohms. Imported. Shpg. wt., 13 lbs.

99 D 0164WX \$5 monthly

Net 34.95

LAFAYETTE "Criterion 50" TRUE 2-WAY BOOKSHELF SYSTEM



• 8" Woofer Plus 4" Tweeter Highly Efficient—Perfect for Low Power


Amplifiers Handles 20 Watts

Handles ZU Watts

A true 2-way bookshelf-type speaker system that offers impressive hi-fi sound, yet measures only 19Wx8%Dx10%"H. Contains two separate speakers — you get an 8-inch woofer and a 4-inch tweeter to provide realistic wide-range reproduction. An acoustically "tuned" enclosure, fully lined, assures smooth, resonant-free sound output with extended bass response. The enclosure is finished on all four sides in a rich, hand-rubbed oiled walnut veneer and tastefully framed in an ebony and gold picture frame molding with white and gold acoustic grill material. Truly, an outstanding buy at this low price. For use with low-power stereo amplifiers—but rated at 20 watts program material for use with larger amplifiers. Designed for vertical or horizontal placement. Overall response: 35-18,000 cycles. 3000 cps electrical crossover. Nominal impedance: 8 ohms, Imported, Shpg, wt., 28 lbs.

8 ohms, Imported, Shpg. wt., 28 lbs. 99 B 0128WX Criterion 50

LAFAYETTE "Criterion 100A" **DELUXE 2-SPEAKER 2-WAY SYSTEM**



Powerful Handling Capcity—30 Watts

Powerful 10" Woofer with 1 lb. Magnet Plus 4" Tweeter

"Tuned" Enclosure with Tube-Type **Ducted Port**

No Money Down . High Frequency Brilliance Control

Overall Response 30-19,000 Cycles

An unusually compact speaker system that delivers really "big" sound. Enclosure is a bass-reflex design using a ducted port of the tube type to provide proper acoustic "tuning." The tube provides a special path for the low frequency sound waves radiated from the rear of the woofer so that they emerge "in-step" with those radiated from the frost and thus provides useful and the statement of the those radiated from the front and thus provides substantially greater bass sound power from the system. Solid wood construction, plus the use of sound absorbent material ensures an extremely rigid enclosure, free of undesirable resonances. A powerful 10-inch woofer provides reproduction of the low frequencies. A 4-inch cone-type tweeter provides reproduction of the mid-range and high frequencies (to beyond audibility) and is of the closed back type to prevent interaction with the 10-inch woofer. Smooth transition is achieved by means of electrical crossover at 2800 cycles. Features high frequency brilliance, control at rear of cabinet. Dimensions are 2142wX1134kx 1042°D. Overall frequency response: 30-19,000 cycles; nominal impedance: 8 ohms; power handling capacity: 30 watts program material. Shpr. wt.. 30 lbs. Imported. Olled walnut finish on 4 sides. 99 D 0148WX \$5 Monthly

Wide Range Sound Reproduction Speaker Systems

5 Year Guarantee



A Lafayette quality product that is guaranteed against defects in material and workmanship for 5 years. If this unit fails to operate due to such defects, simply return it prepaid with your original sales slip or order. Lafayette will repair it without charge including return transportation.

LAFAYETTE "decor-ette® V" SLIM 5-SPEAKER 3-WAY SYSTEM



- Four Specially Engineered 61/2-inch Low Resonance Speakers—One 2½-inch Cone Type Tweeter Designed to Achieve Optimum Performance in a Thin Type Audio-panel Enclosure Only 4¼ Inches Thick
- Frequency Response 50-18,000 cps
- Power Handling Capacity: 25 Watts

3995 2 for 78.50

A dazzling S-speaker system—magnificently styled and offered in an ultra-slim enclosure only 4¼" deep. Four 6½" low resonance woofers assure rich deep-down bass. A 2½" cone-type tweeter provides sparkling reproduction of the mid-range and highs. Overall response of this system is 50-18,000 cps. Enclosure is finished in a rich hand rubbed offed walnut veneer with matching picture frame molding. System may be used for floor mounting, bookshelf, or even wall mounting. Supplied complete with matching legs. Dimensions: 21¼Hx17¾Wx4¼*D. Power handling capacity: 25 watts program material. Nominal impedance: 8 ohms. Imported. Shpg. wt.

99 D 0008WX \$5 Monthly

.. Net 39.95 2 for 78.50

DELUXE LAFAYETTE "Criterion® 200A" 3-Speaker 3-WAY SYSTEM



No Money Down

- Power Handling Capacity-40 Watts
- 12" Woofer With 1 LB Magnet
- 3" Dome-Type "Super" Tweeter 8" Closed Back Midrange Unit

- Response 25-25,000 cps
 "Tuned" Enclosure with Tube-Type **Ducted Port**
- 2 Controls-Brilliance Presence

One of our finest speaker systems—manufactured to rigid specifications and designed to provide full, wide-range response..., from a low 25 cycles all the way up to 25,000 cycles! The Criterion 200 employs 3 separate speakers to provide performance that will satisfy even the more critical listener, 12" woofer with a 1 lb. magnet and 2½" diameter voice coil provides deep, solid bass... reproduces low-frequency instruments with thrilling realism! A superb 8" mid-range speaker and a back-loaded 3" metalic dome-type "Super" tweeter provide flawless reproduction of the mid-range and high frequencies. Features high frequency brilliance control antimarge presence control at rear of cabinet. Enclosure is finished on range presence control at rear of cabinet. Enclosure is finished on all four sides in a rich, hand-rubbed oiled walnut veneer, attractively framed in an ebony and gold picture-frame molding with white and gold acoustic material. Dimensions 24Wx14Hx12"D. Overall Frequency Response: 25 to 25,000 cps. Crossover Frequencies: 700 and 5,000 cps. Impedance: 8 ohms. Power Handling: 40 watts program material. Imported. Shpg. wt., 35 lbs. 99 D 0149WX \$5 Monthly


LAFAYETTE SK-270 decor-ette II" SLIM 5-SPEAKER 3-WAY SYSTEM



- Two 8" Woofers with 1/2lb. Magnets and Rigidflex Floating Piston Hy
 - perbolic Cones
- One 6" Mid-Range Driver
 One 3" Direct Radiator
 Dome-Type HF Tweeter
 One 3½" Cone-Type
- Tweeter
- Power Handling Capacity, Continuous 30 Watts

Designed by Lafayette engineers—built by the foremost English hi-fi speaker manufacturer to Lafayette's rigid specifications. The "decor-ette II" is a 5-speaker 3-way system utilizing the latest advanced acoustic designs. Two 8" woofers with ½ lb. magnets provide maximum distortionless bass from 500 cycles down to 40 cycles. A 6" mid-range open back driver provides uniform response from 500 to 7500 cycles. 3½" cone-type tweeter disperses the mid-highs smoothly from 1000 to 10,000 cycles. A 3" direct radiator dome-type tweeter offers smooth high frequency response from 2500 cycles to beyond the audible limits and adds overall brilliance to the system. beyond the audible limits and adds overall brilliance to the system. RC electrical crossover frequency is 5000 cps. Instantaneous peak load power: 60 watts. Impedance: 8 ohms. Size: 25Hx17Lx434"W. Imported. Shpg. wt., 24 lbs. 21 D 0106WX \$5 Monthly

Criterion® 3X 12" 3-WAY **NEW SUPER ACOUSTIC SUSPENSION SPEAKER**



ONLY

- Power Handling Capacity 50 Watts
 Designed For Use with The Highest Quality Component Amplifiers and Receivers
- Overall Response 20-25,000 CPS
- Separate Midrange and High Frequency Controls

Superb 3-way speaker system for the critical listener seeking greater realism in reproduced sound. Uses the reknowned acoustic suspension principle to extend low frequency response down to a low 20 cycles . . . gives you the deep, powerful bass that is so necessary to proper musical enloyment. Heart of the system is a special 12" high compliance woofer with tong-throw voice coil. Midrange frequencies are flawlessly reproduced by a 6½" condriver which employs a sealed back to avoid interaction with the woofer and to prevent air leakage from the enclosure. 3" metallic, dome-type super tweeter provides brilliant, peak-free reproduction of the highs. Electrical 1200 and 6000 cps. L-C network ensures smooth crossover between all speaker units. Separate midrange and high frequency level controls. Fully air-tight enclosure is solid ¾" construction filled with fiber glass to prevent resonance. Rich, hand-rubbed oiled walnut veneer. Attractive frame of ebony and gold with new snap-off nubby grille cloth panel. Impedance: 8 ohms. Size: 23x13½x11¾" deep. Imported. Shpg. wt., 32 lbs. 99 D 0176WX \$5.00 Monthly



Made in Great Britain by a Famous Manufacturer Especially for LAFAYETTE

2 NEW DELIIXE 4-SPEED MODELS WITH HEAVY-DIITY 4-POLE RALANCED MOTOR



MODEL AC-55

With Ronnette 105 Stereo Cartridge and Diamond LP Needle Installed

MODEL AC-66

less base With Famous

> Diamond Needle Magnetic Stereo

Pickering PAC-1

Cartridge Installed



OUR BEST PERFORMING 4-SPEED AUTOMATIC STEREO CHANGERS

- Plays 16³/₄, 33¹/₄, 45, and 78 RPM Records
- Intermixes up to 10 Records of the Same Speed
- · Heavy 11" Turntable Platter
- Automatic Locking Slim Low-Mass Tone Arm with Full Range of Stylus Pressures

MODEL AC-55 4-SPEED AUTOMATIC STEREO RECORD CHANGER: Deluxe model ac-55 4-SPEED AUTOMATIC STEREO RECORD CHANGER: Deluxe new precision Lafayette 4-speed automatic record changer made in England. Heavy duty 4-pole resiliently mounted and shaded motor and an 11" oversized turntable. Beautiful pearl gray and charcoal trim. Plays 16%, 331%, 45 and 78 RPM records—both stereo and monaural. Removable center spindle permits manual use of the changer, intermixes up to ten records—7", 10", 12"—of the same speed. Built-in stylus brush cleans the needle each time the tone arm returns to the rest position. Muting supprossor mechanism eliminates noise during change cycle of records. Automatic shut-off after last record. Automatically locking, slim, low mass tone arm offers a full range of easy to adjust stylus pressures. Specifications. Wow: .1% to max. .18%, Flutter: .08%, Rumble, -320B • Built-In Record Stylus Brush

Heavy-Duty 4-Pole Resiliently Mounted and Shaded Motor

Automatic Shut-Off After Last Record Has Been

Mac.55, but includes famous PICKERING PAG-1 Gramous recent magnetic stereo cartridge installed instead of Ronette 105, Less base, Shpg. wt., 15 lbs.
21 D 0148W \$5 monthly Net 37.95

NEW LOW PRICED 4-SPEED STEREO AUTOMATIC RECORD CHANGER



MODEL AC-44

ONLY less base . Made in Great Britain

• 4 Speeds-16%, 33%, 45, and 78 RPM

Intermixes Records of Same Speed

. Built-In Stylus Brush

New Lafayette Model AC-44 is a fine 4-speed automatic record changer made in England offering outstanding performance at a low, low, price, Plays 16½, 331½, 45, and 78 RPM records automatically or manually (when you remove the center spindle), intermixes up to ten records—7", 10" and 12" of the same speed. Heavy, precision turntable delivers no noticeable hum, rumble, or wow. Features automatic locking tone arm, built-in 45 RPM centerpiece for manual play, stylus brush, Ronette ceramic stereo turnover cartridge, automatic shut-off after last record has been played. Color: pearl grey and charcoal trim. Dim.: 7½M x 14½M x 14½M x 12½M x 14½M x 14½M

ACCESSORIES FOR LAFAYETTE MODELS AC-44, AC-55, AC-66 RECORD CHANGERS





Deluxe Recessed Oil Walnut Wood Base, Shpg. wt., 2 lbs. 24 D 1213W Nat 3.95

Attractive Plastic Dust Cover, Shpg. wt., 1 lb. 24 D 0247W


Net 3.95

45 RPM Automatic Spindle, Shpg. wt., 1/2 lb.

To Speed Your Mail Order - Please Give Your Zip Code Number

Net 1.95

World Famous Garrard Automatic Turntables



NEW 40/MK-II/Choice of Cartridges

Exciting low cost 4 speed automatic intermix turntable. 4 speeds: 16½3, 33½3, 45, and 78 RPM. Counterweighted cast aluminum tone arm. Automatic intermix operation. Handsomely styled unitized control panel with separate positions for manual and automatic play. Simple, convenient stylus pressure adjustment. Oversized turntable with decorative mat, Garrard 4-pole shaded "Induction Surge" motor, with dynamically balanced rotor, shielded from hum. Size: 14¼4Lx12½"D. Requires 4¾6" above and 2½6" below motor board, Stereo wired, Complete with line cord, 2 plug-in cables and plug-in, shell. Less base and 45 rpm spindle. For 110-130 volts, 60 cycles AC. Shpg. wt., 11 lbs. Imported from England.

Cycles Ac, Shipk, Wt., 11 lbs, imported from England.		
21 D 3756W Model 40/MK-II only \$5 Monthly	Net	44.50
21 D 3766WM Model 40/MK-II plus Pickering V15/AT-2	Net	44.51
21 D 3767WM Model 40/MK-II plus Empire 888	Net	44.51
21 D 3768WM Model 40/MK-II plus Shure M-44-7	Net	44.51
21 D 3769WM Model 40/MK-II plus Pickering V15/ATE-2	Net	49.50
21 D 3770WM Model 40/MK-II plus Empire 888-E	Net	49.50
21 D 3771WM Model 40/MK-II plus Shure M44E	Net	49.50

NEW 50/MK-II/Choice of Cartridges

Model 50/MK-II completely restyled with a new turntable mat and Model 50/MK-II completely restyled with a new turntable mat and trim, a new overarm, newly designed plug in shell and control housing. Features a lightweight tubular arm with a resiliently mounted non-adjustable counterweight, new styl0s-pressure adjuster with gram markings, and a new manual cueing and pause device! Plays 1645. 3314, 45 and 78 RPM records. Automatic intermix operation when desired. Garrard 4-pole shaded "Induction Surge" motor, with dynamically balanced protor, shielded from hum. Size: 1414L x 121/2"D. Requires 43%" above and 27%" below motor board. Stereo wired. Complete with line cord. 2 plug-in cables and plug-im shell. Less base and 45 rom spindle. For 110-130 volts, 60 cycles AC Shog, wt., 11 lbs. Imported from England.

21 D 3757W Model 50/MK-II only \$5 Monthly	Net	54.50
21 D 3772WM Model 50/MK-II plus Pickering V15/AT-2	Net	54.51
21 D 3773WM Model 50/MK-II plus Empire 888	Net	54.51
21 D 3774WM Model 50/MK-II plus Shure M-44-7	Net	54.5
21 D 3775WM Model 50/MK-II plus Pickering V15/ATE-2	Net	59.50
21 D 3776WM Model 50/MK-II plus Empire 888E	Net	59.50
21 D 3777WM Model 50/MK-II plus Shure M44E	Net	59.50

NEW 60/MK-II/Choice of Elliptical Cartridges

Outstandling automatic turntable features: new manual cueing and pause device, Counterweight resiliently mounted to further reduce the already minimal rumble and resonance; a precision stylus pressure adjustment with knurled camera-type dial for high y accurate setting of tracking force, includes Garrard's revolutionary accurate setting of tracking force, includes Garrard's revolutionary new manual cueing: Tubular dynamically-balanced counterweight-adjusted tone arm. Heavy, cast oversized turntable. Double-shielded Laboratory Series 4-pole shaded motor. 4-speeds: 1645, 3319-45 and 78 RPM. Automatic intermix operation. Stereo wired. Size: 1536L x 1316"D. Requires 4%" above and 2%" below mounting board. Complete with line cord. 2 audio cables, shell, standard and manual spindle. For 110-130V, 60 cycles AC. Base not included. Shpg. wt., 13 lbs. Imported from England.

Stipg, Mt., 13 ibs. Imported from England.	
21 0 3758WX Model 60/MK-II only \$5 monthly	Net 74.50
21 0 0100114 model do min it om, 33 monthly	
24 D 2770WYRE Madel CO (SEM II alice Distractor VIE)	ATE-2 Net 74.51
21 D 3778WXM Model 60/MK-II plus Pickering V15/	AIE-2 NEL 74.31
De D STROWNER staded CO / SEW St Live Francis COOF	BI-A 74 C4
21 D 3779WXM Model 60/MK-H plus Empire 888E	Net 74.51
21 D 3780WXM Model 60 / MK-H plus Shure M44F	Net 74 51

NEW LAB 80/MK-II/Choice of Elliptical Cartridges

New, improved automatic transcription turntable for professional reproduction of 33½ and 45 rpm records. Dynamically balanced arm made of low resonant Afrormosia wood. Tracking force adjustable with audible/visual click settings. Adjustable, silding weight anti-skating control. Integral hydraulic cueing device. Precision automatic spindle with famous pusher principle: heavy 12" balanced, cast non-magnetic turntable: stereo wired. Complete with line cord. 2 audio cables, shell, 45 rpm manual adapter, standard and manual spindles. Min. cabinet dimensions. 17 x 1434": 5½" above and 3½" below mounting board. For 110-130 % 60 cycles AC. Base not included. Shpg. wt., 22 lbs. Imported from England.
21 D 3760WX Lab 80/MK-II only \$5 monthly

Net 99.50

21 D 3784WXM Lab 80/MK-II plus Pickering V15/ATE-2 21 D 3785WXM Lab 80/MK-II plus Empire 888E 21 D 3786WXM Lab 80/MK-II plus Shure M44E Net 99.51

Elliptical Cartridge Stereo C more with purchase of 60/MK-II or Lab 80/II or \$5.00 more with purchase of 40/MK-II or 50/MK-II Pickering Empire 888E 34.95 34.95 34.50

Model 40/II Alone 4450 Model 40/II with choice of Conical Cartridge 4451

Model 40/II with choice of Elliptical Cartridge 4950



Model 50/II Alone 54⁵⁰ Model 50/II with choice of Conicat Cartridge 5451 Model 50/II with

choice of Ellip-tical Cartridge 59⁵⁰



Model 60/MK-11 Alone 4 50

Model 60/MK-11 with choice of Elliptical Cartridge

1 51



Model LAB 80/II Alone

Model LAB 80/II with Choice of Elliptical Cartridge 9951



Lafayette Cat. No. 671

LAFAYETTE Stereo/10 Transistorized Amplifier





Variable Tone Control (Bass/Treble)

- Front Panel Phono/Tuner Switch For Selection of Phono or Tuner Input
- Selector Switch for Monaural or Stereo Operation

COMPACT SIZE, BIG PERFORMANCE! Ideal amplifier for MI-Fi begin-COMPACT SIZE, BIG PERFORMANCE: Ideal amplifier for All-F1 Deginers, or use it in a second system for the living room, den, bedroom or business. Perfect for limited-space installation; bookshelf or end table. For use with record players, AM, FM and FM MPX tuners. Completely transistorized to provide clean, cool operation. Output stages couple directly to the speakers for smooth frequency response and low distortion. Input stages are designed to present high impedance, resulting in an excellent low frequency response when used with high impedance crystal or ceramic phono cartridges. when used with high impedance crystal or ceramic phono Cartifues, Front panel features: Separate volume controls for Left/Right channels; tone control for Base and Treble; individual slide switches for mode input (1-Stereo/Mono operation), (1-Phono/Tuner input); power On/Off slide switch. Rear panel features: Right/Left channel inputs for phono and tuner; Right/Left channel taps for 8-ohm speakers. Beautifully linished in neutral gray and aluminum. Size: 74/2Wx2!%_HX 5%-70. For 105-125V 50/60 cycles AC. Imported. Shpg. wt., 4_bs_ 20 B 0161

LAFAYETTE TRANSISTORIZED STEREO MIXER/PREAMP



FAMOUS NAME STEREO CARTRIDGES with DIAMOND NEEDLES AT LOW LAFAYETTE PRICES

New Grado BTR

Only

New Empire 808



Widely acclaimed ceramic stereo cartridge, Only 31/2 grams. Freq. response 10-50,000 cps; separ-

Ideal low priced cartridge with a tracking force of 1-6 grams.
Freq. response 10-20,000 cps;
output 8.0 mv per channel; separation over 30 db. Shpg. wt., 6 oz.

21 D 3464L Net 14.95 OTHER OUTSTANDING STEREO CARTRIDGES 21 D 5355L Pickering V15/AT-2 Conical 21 B 5362L Pickering V15/ATE-2 Elliptical 21 D 5357L Pickering P/AC-1 Conical 21 D 3418L Empire 888 Conical Net 24.95 Net 34.95 Net 15.95 Net 24.95 Net 34.95 21 D 3457L Empire 888 Elliptical 21 D 6216L Shure M-44-7 Conical 21 D 6236L Shure M-44E Elliptical 21 D 6201L Shure M-3D Conical Net Sale 9.95 39.00 21 D 1306L ADC Point 4/E Elliptical 21 D 3848L GE VR-1000-3 Elliptical Sale Net 16.75 "All-Transistor" stereo-mixer/preamp! For use with any power amplifier not incorporating low-level input for magnetic cartridges, tape heads and low-impedance microphones. Raises the output of any low level source without affecting the signal-to-noise ratio. Features: 2-mike, 2-phone, 2-tape inputs; volume control for left/right channel; equalization switch; power off/on switch; mode switch; built-in 9V DC power supply, or, operates off 117V 50/50 cycles AC. Input impedance: 50K ohms. Output impedance volume: 5K ohms. max. Size: 2½Hx7Wx5½"D. Imported. Shpg. wt., 134 lbs. Net 14.95 99 D 0176

STEREO VU BALANCE METER

Ends the problem of balancing your stereo system. Two precisely damped loudness meters provide a continuous compar-

provide a continuous comparison of speaker levels. Scales calibrated in "Volume Units" and percent. 1.2 volts input sensitivity for 0 VU or 100 percent indication. The special calibrating switch and 20 db attenuation controls permit exact matching of channels. Greater than 8,000 ohm impedance permits connecting to output circuits without loading. 6Wx31/4Hx2%"0. Imported. Shpg. wt., 3 lbs.

99 0 5038

Net 11.95



ROTRON WHISPER FAN

 Super Silent, Compact • Reduces Service Costs

The ideal fan for cooling hi-fi equipment. Extremely quiet, introduces no distortion, yet it moves 60 cubic feet of cool air per minute. Airflow is reversible. Prelubrication will provide years of maintenance-free oper-60 cps, 7 watts. Size: 1½" deep and 41%"

ation. For 115VAC, square. Shpg. wt., 1 lb. Net 14.65 24 D 7501

ACCESSORIES FOR GARRARD AUTOMATIC TURNTABLES AND PLAYERS



- (A) Garrard Simulated Ebony and Walnut Base with Silver Trim. Shpg. wt., 2 lbs. 21 D 3763W For 70, Series Net 5.50 21 D 3762W For Lab 80 Series Net 5.50 For 60, 50, 40, 20, Series 21 D 3761W Net 4.50
- (B) LAFAYETTE RECESSED WOOD BASES

DILED WALNUT - Shpg. wt., 6 lbs.	
24 D 1203W For Lab 80 Series Net	5.50
24 D 1201W For A70 Series Net	4.50
24 D 1205W For 60, 50, 20 Series Net	4.50
MANDGANY - Shog, wt., 6 lbs.	
24 D 1204W For Lab 80 Series Net	5.50
24 D 1202W For A70 Series Net	4.50
For 60, 50, 40, 20 Series	
24 D 1206W Net	4.50

GARRARD CRYSTAL CLEAR STYRENE DUST COVERS. Can be used in place while playing a stack of records. Shpg. wt., 11/2 lbs. For Lab 80, 70, A Series 21 D 3765W Net 5.50 For 60, 50, 40, 20 Series, Autoslim & AT-6 21 D 3784W Net 4.50 (D) EXTRA-PLUG-IN SHELLS — complete with all mounting accessoriees. Shpg. wt.,

6 oz. For Lab 80 and 70 Series Net 2.50 21 0 3727 For 60, 50, 40, 20 Series 21 0 3728 Net 1.75 0 3728 45 RPM SPINDLES, Avg. Shpg. wt., 10 oz. 21 D 3710 For 70 Series 21 D 3709 For Lab 80 Series Net 5.95

For 60, 50, 40 Series 21 D 3787

LAFAYETTE RECORDING TAPES

LAFAYETTE'S FAMOUS MONEY-BACK GUARANTEE YOU BE THE JUDGE!

Lafayette's tape is made by outstanding na-Larayette's tape is made by outstanding na-tionally known manufacturers. It is first quality, splice free, red oxide coated, with full frequency response, uniform output and no "drop-outs." Resistant to moisture, heat, cold and abrasion.

We guarantee absolute satisfaction or your money back. If for any reason you are dissatisfied, return the tape at once and we will refund your money less only transportation charges. You are the sole judge.



AFAYETTE ACETATE RECORDING TAPE

Acetate base magnetic recording tape with uniform standard red oxide coating provides wide range high fidelity response over the audio spectrum. Features noise free reproduction, low abrasion and uniform output. In 1 mil and 1½ mil thickness.

					N	et Per	Reel
Stock No.	Feet	Reel	Mils	Wt. Lbs.	1-4	5-24	25 Uu
28 D 0102	600	5"	14/2	1/2	.99	.90	.85
28 D 0103	900	5"	ī	34	1.20	1.10	.99
28 D 0101	1200	7"	142	1	1.59	1.49	1.35
28 D 0104	1800	7"	i	11/4	1.98	1.88	1.79

LAFAYETTE MYLAR RECORDING TAPE

Mylar base is especially strong, durable and break resistant, and is virtually impervious to heat, cold or humidity. Atl in clear plastic reefs, individually boxed.

	4_				N	et Per	Reel
Stock No.	Feet	Reel	Mils	Wt. Lbs.	1-4	5-24	25 Up
28 D 0105	1200	5"	1/2	3/4	1.75	1.58	1.42
28 D 0106	1800	7"	1	11/4	2.49	2.25	2.13
28 D 0107	2400	7"	1/2	11/4	3.10	2.79	2.51

LAFAYETTE TENSILIZED MYLAR TAPES

These tapes are of the same high quality as the standard acetate and mylar Lafayette tapes with the added advantages of the tensilized mylar base. Super-strong mylar is prestretched and is highly resistant to breakage, moisture, heat, cold, and humidity. Highly polished, splice-free, quiet, non-abrasive finishs. Smooth output throughout the entire audio spectrum. Tensilized mylar gives you the most permanent type of base and is therefore ideal for your most treasured recordings. All are ½ mil, thus permitting the maximum amount of footage per reel. Individually boxed + in self-mailing box.

STOCK NO.	FEET	REEL SIZE	WT., LBS.	1-4	NET PER REEL 5-24	25-UP
28 D 0109	300+	3"	1/2	.69	.63	.59
28 D 0110	600+	31/4"	1/2	1.20	1.09	.99
28 D 0111	1200	5"	1/2	2.25	2.03	1.83
28 D 0108	2400	7"	1/2	3.69	3.39	3.05

Two Operations—Cuts & Trims Clean Splices in Seconds For Monaural or 2 and 4-Track Stereo

LAFAYETTE TAPE SPLICER



98

- - LAFAYETTE BULK TAPE ERASER AND DEMAGNETIZERS

PROFESSIONAL MODEL

- Completely Erases Tape

- Two Erasing Coils
 Erases up to 1" Tapes
 Erases ¼" Tapes in One
 Operation—No Reversing
 - For 3", 5", 7" or 101/2" Reels


Standard Model

Professional



METAL TAPE

STORAGE CHEST



TELEPHONE PICKUP FOR RECORDING TELEPHONE CONVERSATIONS



29

Net 1.98

Induction telephone pick-up for cradie or upright phones. Picks up conversations without wire tapping or special circuitry. Simply place phone base on pickup and connect leads to high impedance input of an audio amplifier or directly to a tape recorder. Imported. Shpg. wt., 8 oz, 98 o 1034 99 0 1034 Not 1.40

To Speed Your Mail Order - Please Give Your Zip Code Number

STANDARD MODEL

Similar to professional model for all size reels but handles only standard size ¼" tapes or smaller and reel must be turned over once. Has separate spindle positions for 10½" and 3, 5, and 7" reels; non-magnetic bakelite plate for reel rest. Dne powerful coil consumes 5 amps. Metal case 7½x4¾x3½". Imported. Shpg. wt., 9 lbs. Net 12.50

LAFAYETTE TAPE HEAD DEMAGNETIZER WITH SWITCH



Pencli shaped head demagnetizer with one extending probe. Styling allows you to reach all heads in all positions. Features switch control . . . no need to leave unit on constantly. Turn on when needed and off to conserve units life. Operates on standard 110-120v 60 cycle AC. Imported. Shpg. wt., 1 lb.

99 0 1533 Net 2.49

AUTO TAPE SYSTEM MAINTENANCE KIT



195

Lafayette Cat. No. 671

Low Priced, Top Quality Solid State Recorders

LAFAYETTE COMPACT PORTABLE TAPE RECORDER



ONLY 1495

Efficient All Solid-State Amplifier

2 Track Recording with up to 3" Reel Goes Anywhere . . . Use Anyplace

Smart styling places a tape recorder in a case which appears to be a regular book when closed. Perfect for recording classroom lessons without having the recorder visible. Everyone acts natural with this hidden recorder—eliminates microphone nervousness. Efficient solidhidden recorder—eliminates microphone nervousness. Efficient solid-state circuitry utilizes 4 transistors to achieve satisfactory frequency response. Standard 3-inch reel allows 2 track recording. Power is supplied by two "C" cells and one 9 volt battery. Supplied with 100 ft. of recording tape on a 3-inch reel, extra empty 3-inch reel, crystal microphone, and batteries. Imported. Shpg. wt., 4 lbs. Lafayette Compact Portable Tape Recorder

Net 14.95 Replacement 9 volt battery for above (1 req.) 99 D 6021

Net ea. .21 Replaement "C" battery for above (2 req.) Net ea.

ECONOMY PRICED, BATTERY POWERED, CAPSTAN DRIVE RECORDER



• 2 Speeds, 334 and 1% i.p.s.

 Records up to 40 Minutes at 1% i.p.s.

Includes Remote Control Mike, 3" Reel of Tape, 3" Empty Take-Up Reel, 6 "C" Type Batteries

New, low priced capstan driven, battery-operated tape recorder. Compact, lightweight. Operates anywhere. For business, home and pleasure. Works vertically or horizontally, with lid opened or closed. Powerful 3½" PM Dynamic speaker. Features include: automatic recording level control, semi-sound monitoring system, fast forward, fast rewind, recording level indicator. Power sources operates on six "C" flashlight batteries or regular 117V 60 cycle AC with optional adapter. Size: 8½ x 10½ x 3"D. Complete with accessories above. Imported. Shpg. wt., 6 lbs. 27 8 12011.


27 D 1201L het ea. .13

99 0 6257 Extra "C" Batteries for above (5 req.) het 27 0 0104 Voice Operated Mike for above, wt., 2 lbs. 27 0 0107 AC Adapter for above, wt., 1 lb. Net 6.95

MINIATURE BATTERY OPERATED RECORDER

ONLY

 Complete with Mike. Earphone, **Batteries** and 3" Take-up Reel



Ideal for oral note taking, homework, dictation and ail-around family fun. Can record and play back in any position—even with the lid closed. Positive action controls (Rev., Stop, Play, Rec.) and volume. Crystal mike has lapel clip for inconspicuous use. Records up to 24 min. Metal case with carrying handle. Mare builting speaker, earphone for handle. Has built-in speaker, earphone for personal listening, batteries and 3" empty take-up reel. Size: 316W x 71/2L x 21/2"H. imported. Shpg. wt., 3 lbs. 27 D 1005L

Extra "C" cel. battery (2 required) 99 D 6257

Extra 9-volt battery (1 required) Net



Recording

Time

Really portable—the F-20 goes anywhere: to school, in a briefcase, on a trip. Features reliable solid state circultry, "fluxfield" head for wide i-zquency response and variable speed control. Records up to 30 minutes on standard 24" reel. Easy finger-tip control of transport functions, builded when the control of transport functions. Includes dynamic microphone, built-in speaker, empty reel and earphone lack. Uses penlight cells (see below). Size: 63/ex 2½x4½". Imported. Shpg. wt., 4 lbs.

27 D 3510L Net 19.75 27 0 3505 195 ft. reel of tape Net 59 Batteries for F-20 (4 required) Net ea. .09

NEW CONCORD MODEL F-90 AC AND BATTERY **RADIOCORDER**



· Simultaneously Play and Record **AM Radio Broadcasts**

 2 Speeds, 3¾ and 1½; Takes Reels up to 31/4"

Record your favorite AM radio programs, music, and playback instantly. Solid state, pushbutton controls. Records and plays any-where. Operates on Batteries or standard 117 VAC household current. Lever indicator meter indicates battery condition. Output: two watts. Superhetrodyne AM radio. With remote mike and stand. Imported. 27 D 3321 \$5 monthly wt., 10 lbs. Net 69.50

"C" Batteries for F-90 (4 required) 99 D 6257

To Speed Your Mail Order - Please Give Your Zip Code Number

Wollensak-sony - Panasonic - CONCORD - Norelco

SONY MODEL 250-A SOLID STATE STEREO TAPE DECK

Dnly No Money Down



Beautiful Walnut Finished Base • Two VU Meters 4 Track Mono and Stereo Record and Playback

A completely transistorized sterao tape deck with a black and brush A completely transistorized sterao tape deck with a black and brush satin chrome finish on a wainut base. Includes 4 track mono as well as 4 track stereo playback and record. Features true Capstan drive. FM stereo inputs, pause control, automatic shut off and tape counter. Also an automatic tape lifter for longer head life. Specifications: Speeds—7½ and 3¾ ips., Response—5-15,000 cps ±2db, S/N better than 50db. Flutter and Wow less than 0.15%. Takes reels up to 7". Inputs for two mikes 117V 60 cycle AC. Size: 14½WX11¾DX DX 15.00.00 cm 15.50 monthly 27 D 6008WX \$7.50 monthly 27 D 6015 F96L mike for 250-A 1 lb. Net 135.00 Net 10 50

NEW! PANASONIC RQ-3100 SOLID STATE BATTERY POWERED CARTRIDGE RECORDER



Truly portable battery powered tape recorder...simple and easy to operate...just slip a tape cartridge into the recorder and you are ready to play or record for up to 1 hour. Goes anywhere, plays anywhere. Big PM dynamic speaker assures rich, high quality sound reproduction. External, slim dynamic microphone assures excellent recording fidelity. Other features are; VU meter recording level indicator, single lever play, fast forward and rewind function, earphone monitor and tape erasing system. Size: 9 x 43% x 21/4". Wt., 4 lbs. 27 B 12051 \$5.00 monthly 27 D 1205L \$5.00 monthly Net 69.95

60 minute blank cartridge for RQ-3100. 27 D 4805 Shpg. wt. 1/2 lb. 99 D 6257 Batteries for RQ-3100, 5 req.

Net .13 ea.

WOLLENSAK MODEL 5730 SOLID STATE 4 TRACK STEREO RECORDER



3 speeds 7½, 3¾, 1% ips

NEW CONCORD MODEL 776 AUTOMATIC REVERSE SOLID STATE STEREO RECORDER



ONLY

 Plays and Records in Both Directions for up to 6 Continuous Hours, 4 Tape Heads

No Money Down

Record, playback and enjoy up to 6 hours of music or voice. Records and plays in both directions eliminating reel turnover and re-threading. Electronic control tape position automatically shuts off recorder. ing. Electronic control tape position automatically shuts off recorder. Records four track stereo through twin dynamic cardioid microphones or direct from FM stereo, record players or other recorders. A track monaural recording and playback. Features: 4 tape heads; 2 four-track stereo erase and 2 four-track record play. Sound with sound recording; manual reverse at any point. 2 speeds; 7½ and 3¾ i.p.s. Two tone controls, two VU record level meters. Monitor position, cue button, output jacks for head phones, extension speakers. 13H x 20L x 6½°D, plus 2 detachable book shelf style speakers 6½ x 6½ x 10°. With 2 mikes, 2 mike stands, 2 patchcords, 1 reel. Imported. Shpg. wt., 45 lbs.

Net 299.95

NEW NORELCO MODEL 350 "CASSETTE" AC CARTRIDGE RECORDER

Ideal for Office and Professional Use

· Compact, Modern Design, Wooden Cabinet Tape Speed 1% ips—Pushbutton Controls

Records or Plays up to 90 minutes

Advanced New Solid State AC Cartridge Recorder. Features: positive action pushbuttons for easy selection of: Record, play, fast-forward and rewind, tape pause and stop; adjustable tone and volume controls. Features a built-in modulation indicator; 3-digit counter with zero reset, manual or automatic modulation control and built-in speaker. Full array of plugs and sockets for input/output facilities. 50-10,000 cps response. With dynamic microphone. For 110-120v., 60 cycles AC. 141/2x81/2x31/2*. Imported. Shpg wt., 81/2 lbs.

27 D 4816WX \$7.00 monthly

Net 129.95

90 minute blank tape cartridge for 350. 27 D 4817 Shpg. wt., 1/2 lb.


Net ea. 3.75

Get The Tape Recorder You Want Now! No Money Down

No Money Down

Exciting New Tape Cartridge Recorder & Decks

MERCURY TR8700 4-TRACK STEREO TAPE CARTRIDGE RECORDER



Only No Money Down

Plus Bonus Package of 4 pre-recorded Mercury Stereo Tape Cartridges A 23.80 value



- 1 Broadway Big Hits
- 2 Best of Cugat
- 3 Fennell Plays V. Herbert
- 4 Lester Lanin

Operates on 4 "D" batteries or 110V., 60 cps AC

Thrilling new 4-track stereo tape cartridge system, Plays and records type stereo and monaural tape cartridges instantly. No threading of tape. Powerful solid state circuitry. 4-track stereo tape cartridges record and play up to 90 minutes. Push-button controls. Two 3x5 wide-range matching speakers attach quickly to recording and playback unit for complete portability. Two YU meters. Complete

NEW "AUTOMATIC" 8-TRACK HOME CARTRIDGE TAPE DECK



 Permits you to play Lear type "Stereo 8" tape cartridges thru the amplifier and speakers of your present home Hi-Fi system.

Remerkable, fully transistorized, 8 track home cartridge player with built-in dual pre-amplifiers. Plays all "Stereo 8" track endless-play pre-recorded tape cartridges through any stereo amplifier having an 'auxiliary' or "extra" (lat response input jack. Plays instantly when cartridge is inserted. Features visual channel indicator, and automatic

UNIQUE ROBERTS MODEL 1725-8L COMPATIBLE STEREO RECORDER



RECORD ON, AS WELL AS LISTEN TO, THE NEW "STEREO 8" CARTRIDGES ON A REEL-TO-REEL RECORDER

Track Stereo and Monaural Reel-To-Reel Record and Play

8 Track Stereo Cartridge Record and Play

Exciting compatible transistorized reel-to-reel / cartridge recorder Exciting compatible transistorized reel-to-reel/cartridge recorder plays 8 track Lear stereo 8 cartridges as well as record Lear cartridge from mike, tuner, and simultaneously record tapes being played on the reel-to-reel portion of this recorder, Reel-to-Reel portion of recorder features 2 heads, 3 speed 7½, 3¾, 1¾ is automatic shut-off, 3 place digital index counter, pause lever, and record interlock, 5x7" extended range speakers, Outputs for 2 external speakers and stereo headphone. Reel size: 7". With 2 dynamic microphones. For 110 VAC 60 cycles. Size: 15¼x7½x13¾". Shpg. wt., 40 tbs.
27 B 5501WX \$17 monthly

Net 339.85 27 9 5514 Blank tape cartridge for 1725-8L. 42 lb.

NEW NORELCO MODEL 962 4-BAND SOLID STATE PORTABLE RADIO/RECORDER



Deluxe Car Stereo Tape Cartridge Players

NEW "DIMENSION 48" SOLID STATE COMPATIBLE 4 AND 8 TRACK CAR STEREO TAPE PLAYER

No Money Down

For All 12 Volt Neg/Pos. Ground Cars



- Plays Either 8 Track or 4 Track Tapes Instantly
- Includes Four 5" Wide Range Speakers and Grills.

Dutstanding new compatible car stereo tape player plays both 4 and 8 track stereo and Outstanding new compatible car stereo tape player plays both 4 and 8 track stereo and monaural tapes. Superb tape reproduction. Fully automatic—tapes play instantly—no extra switches or levers to select choice of cartridge—removal of cartridge from player automatically turns unit off. High styling enhances decor of your car. Features Electronic Program selection—channel automatically transfers at end of program. Selector bar permits instant change of tracks (program), illuminated dial indicates the channel that is playing, separate tone and volume controls, Dust proof door seals cartridge opening when player is not in use. 12 transistors, 2 thermistors, 4 ohm output. Peak audio output 8 watts (4 per channel). Includes four 5" round wide range speakers, 4 grills, and all connecting cables. Size: 1½4x7%wx8%0. For 12V neg/pos, ground cars, Imported. Shpg. wt., 12 lbs.
17 D 7415WX S5 monthly

Net 89.95 17 D 7415WX \$5 monthly

DELUXE STEREO TAPE CARTRIDGES



RCA 8 TRACK

Many Moods of Harry Belafonte Net 6.95 28 D 1102-Shpg. wt., Music from Mary Poppins
26 D 1283—Shpg. wt., 5 oz.
Lovely and Alive—Lena Horne
28 D 1151—Shpg. wt., 5 oz. Net 4.95 Net 6.95 Elvis Presley "Gold Records" 28 0 1179—Shpg, wt., 5 oz. Pink Panther—Henry Mancini Net 6.95 28 D 1166—Shpg. wt., 5 oz. Beethoven Sym. No. 5 Reiner 28 D 1250—Shpg. wt., 5 oz. Net 6.95 Net 6.95 4 TRACK

Tijuana Brass-Herb Alpert Net 4.95 28 D 6113-Shpg. wt., 5 oz. My Fair Lady 28 D 6114—Shpg. wt., 5 oz. Net 4.95 Pradomania 28 D 6112—Shpg. wt., 5 oz. Net 4.95

DELUXE LEAR JET 8-TRACK SOLID-STATE CAR STEREO TAPE PLAYERS

"Stereo 8" Player Less Radio No Money Down

"Stereo 8" Player With AM Radio No Money Oown

"Stereo 8" Player With FM Radio No Money Down

includes 4 spk'rs

Lear Jet solid state stereo "8" Car Tape Players feature 8 track playback. 8 Tracks give you twice the music! You get up to 1 hour 20 minutes of stereo music; up to 2 hours and 40 minutes of monaurat music. Available with and without AM or FM radio. Outstanding features: automatic endless play of entire cartridge, tape speed 3% ips, pushbutton program selector, front loading of cartridge, easy installation with adjustable mounting bracket. Power output: 4 watts per channel rms. Includes 4 wide rarge speakers with grills and connecting cables. Overall Dim. 8Wx74/6Dx2%"H. For 12 VOLTS NEGATIVE GROUND. STEREO 8 MOBILE PLAYER LESS RADIO. Shpg. wt., 12 lbs.

Net 129.95

STEREO 8 MOBILE PLAYER WITH AM RADIO.
Deluxe 8 Track player with built-in AM radio. Includes 4 wide range speakers with grills and connecting cables. Size: 8Wx7¼0X2¾x"H. Shpg. wt., 14½ lbs.
17 0 9006WXM 58 monthly Net 159.95

STEREO 8 MOBILE PLAYER WITH FM RADIO.

Deluxe 8 Track player with built-in high quality FM radio. Includes 4 wide range speakers with grills and connecting cables. Size: 8Wx74aDx234"H. Shpg. wt., 14½ lbs.

17 D.9007WXM \$9 monthly

Net 189.95



SPECIAL PURCHASE -- MANUFACTURERS CLEARANCE Famous Muntz Solid State Auto/Stereo 4 Track Stereo Player



Our low. low Price

Less Cartridge & Speakers

Lafayette is proud to offer this outstanding value—a deluxe continuous loop 4 track stereo tape cartridge system. Smart, clean styling. Slip a 4 track stereo cartridge in the player, pull a lever, and your car is filled with beautiful music. 3 finger-tip controls—loudness, balance, tone. Beautiful ebony finish. 12-transistor music power 8 watts per channel. Speed 3% ips. Dim. 6%wX74&DX36**H. With all mounting brackets and hardware—for 12V-Negative ground cars. Shop, wt. 8 lbs.

17 D 6001WX

Net 49.85

Pair of matched 21/2x10" 4-ohm wide-range speakers. 17 D 6002W Shpg. wt., 5 lbs.

Net 15.95

on purchase of speakers with player.

17 D 9004WXM Shpg, wt., 15 lbs.

Net 59.95

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down

Lafayette Cat. No. 671

NEW! REVERE SUPER EIGHT MOVIE CAMERA

Battery-powered Film Drive Film Running Indicator

Built-in Conversion "A" Filter

 Seven Lens Settings Handy Pistol Grip

Revere Automatic SI Super 8 Movie Camera has many features never before offered in a budget movie camera! Cartridge-loading fixed-focus—has fast f/2.5 lens, battery-powered film drive, positive footage indicator in viewfinder. "Film running" indicator tells you film is being exposed properly, Built-in conversion "A" filter lets you use the same film for both indoor and outdoor shots. No focus worrles; universal focus gives you sharp, clear results with a minimum of effort. Seven lens settings with click

stops; handy pistol grip with trigger safety lock: new sculptured styling; full 50-foot ex-posure with no reversing of film. All this plus famous Super 8 advantages: 50% larger image; sharper, brighter, more colorful movies on your screen. Shpg. wt., 3 lbs. 15 D 1815L

Case for above camera. Shpg. wt., 1 lb. 15 D 1604 Net Net 1.95

Batteries for above (4 Req.) Net ea.



ATLAS-WARNER SUPER SCREEN 8 mm MOVIE EDITOR

- Giant 22 Sq. In. Screen
- Built-in Splicer with Tape

Fully coated four element f/1.8 lens combines with two element condensing lens system to provide brilliant viewing. No-thread loading and high speed geared rewind facilitate operation. Safe trans-former operation, built-in dry splicer, notcher, and die-cast construction are among the many features. Beautifully styled. Shpg. wt., 7 lbs.

15 D 8402 For super 8 mm ... Net 28.95 15 D 8403 For standard 8 mm Net 28.95

COMPLETE SUPER 8 MOVIE OUTFIT

- Snap-in Film For Instant Camera Use
- Automatic Electric Eye Camera
- Advanced Easy-to-Use Focus
- Automatic Reel-to-Reel Threading Projector

12-piece Super 8 outfit, assures success in taking and showing home movies. Outflt includes: Crestline Super 8 automatic camera featuring instant loading; no setting or winding. Camera boasts automatic exposure and fixed f/1.8 lens, Over/under exposure warning in view-finder; type "A" filter automatically disengages when movie light is used on camera; battery operated film drive. Automatic threading Super 8 projector: has sharp f/1.4 coated lens; 500-watt brilliance; exclusive swing-line focusing control; selfcontained case with handle. Also includes: light bar, two bulbs; carrying case for camera, film, accessories: 30×40" folding tripod screen; 4 alkaline camera batteries; 50 at.film cartridge. Uses super 8 film only. Imported. Shpg. wt., 26 lbs.

15 D 9013WXM \$5 monthly Net 99.95 Crestline Automatic Super 8 movie camera only. 15 0 7804L ... \$5 monthly Net 39.95 Automatic Super 8 projector only. Wt. 15 lbs. 15 D 7806WX \$5 monthly Net 49.95 15 D 7806WX \$5 monthly

COMPLETE SUPER 8 ZOOM MOVIE OUTFIT

- Fully Automatic Electric-eye
- Sharp f/1.8 Zoom Lens
- Automatic Reel-to-Reel Threading
- . Rapid Rewind Through Film Gate

Complete outfit for movie making! Camera features: single lens for sharp Zoom pictures from wide angle through normal to telephoto; from wide angle through normal to telephoto; snap-in cartridge, automatic electric eye with f/1.8 lens; type "A" filter that automatically disengages for indoor operation; over-or-under function that automatically warns you when light is not correct; batterywarns you when light is not correct; battery-powered film drive; governor-controlled mo-tor; automatic film footage Indicator. Pro-jector features: super 8mm projection for larger, brighter picture; advanced easy to use focus; automatic reel-to-reel threading; rapid rewind; 400° reel capacity; f/1.4 lens; 500 watt brilliance. Single knob controls On, Cooling, Off, Rewind. Self contained elevation knob. Outfit also includes: camera case, light bar. 2-light buibs, 50 ft. film cartridge, 30x 40° folding tripod beaded screen, 4 alkaline batteries, Shog, wt., 27 lbs. batteries. Shpg. wt., 27 lbs. 15 D 9012WXM \$6.50 monthly Net 115.95

Vicroy Zoom Super 8 Automatic Movie Camera

15 D 7805L ... \$5 monthly . Net 56.95 Automatic Super 8 Projector only, Wt. 15 lbs. 15 D 7806WX S5 monthly Net 48.95



SUPER 8 mm REVIEWER-EDITOR

- High Intensity
- 400-ft, Capacity
- Large Screen Includes Splicer

Eliminates the bothersome complexity of trying to edit small reels of film with separate pieces of equipment. Contains all the necessary controls and features to easily edit super 8 mm movie film. Built-in notcher, focusing, and framing.

Shpg. wt., 41/2 lbs. 15 D 3441 Net 14.95

Same as above but for standard 8 mm. 15 D 3425 Net 14.

Lafayette Cat. No. 671

Make Lafayette Your One Dependable Source for Everything in Electronics

Deluxe Super 8 Movie Cameras - Projectors

(A) YASHICA SUPER 8-25 REFLEX ZOOM

Fully Automatic Electric Eye f/1.8 Zoom lens

A completely automatic camera which has most of the features one could want in a single unit. This sleek, compact Yashica Super 8-25 features instant loading, fully automatic exposure, electric film drive and the brilliant Yashinon f/1.8 reflex zoom lens with a 2½ to 1 ratio—12 to 30mm. Incorporates an exposure warning system in the ratio—12 to 30mm. Incorporates an exposure warning system in the viewfinder, which indicates over, or under-exposure, as well as the lens opening. The selenium exposure system is automatically set by the cartridge for ASA 25 and 40. Other features include a battery check, diopter—adjustable eyepiece, footage counter, 18 fps speed and single frame cable release socket and molded pistol grip with attached wrist strap for comfortable shooting. With batteries. Imported. Shpg. wt., 3 lbs.

15 D 3622L Model Super 25 99 D 6258 Extra Batteries for above (4 req.)

\$5 monthly .

Net 74.95 Net ea. ,09

YASHICA SUPER 8-50 REFLEX ZOOM

- Behind The Lens CDS Exposure Control
- F/1.7 Lens Zooms From 8.5 to 42.5mm
- Push-Button Power Zoom With Pistol Grip

Brilliant new Super 8 movie camera features a Yashinon f/1.7 electric zoom lens, for automatic pushbutton zoom; 1D group, 12 elements, 5-1 zoom ratio; focuses to 5' with split-image range-finder; stops down to f/22. Other features are: Through-the-lens exposure control with cadmium sulphide cell; reflex viewing with adjustable eyeplece, aperture scale, battery check, and over-under warning signal visible in finder; manual back-light control; 18 fps and single framer built-in "A" filter; auto-reset footage counter; Three-way shutter control; remote input. Accessories: Remote con. Three-way shutter control; remote input. Accessories: Remote control cable and switch, rubber eyecup, 4 "AA" cell Batteries, filter key. Imported. Shpg. wt., 3½ lbs.

15 D 3631L 57 monthly

Net 129.95

99 D 6258 Extra Batteries for above (4 req.)

BAUER C1 SUPER 8 REFLEX ZOOM

· CdS meter behind the lens · 3-speeds-with grip Fast f/1.8 4-1 zoom lens

Instant loading, instant filming Super 8 camera features: Throughthe-lens reflex viewing. Famed Bauer Vario f/1.8 zoom lens with CdS cell mounted behind the lens for unerring accuracy. Three speeds (12. 18 and 24 fps) plus single frame. Built-in type "A" filter and permanent hand grip. Battery driven motor. Contoured rubber eyeplece. Rubber sunshade. Other benefits of The Bauer Super 8 (drop-in cartridge loading, viewfinder shows if batteries are sufficiently charged and if light is sufficient for shot, focusing from 3. It is infinity and auto findage counter). Imported from West to infinity and auto footage counter), Imported from West Germany, Shpg. wt., 3 lbs

15 D 3710L \$8 monthly

Net 159.95

99 D 6258 Batteries for above (4 req.)

Net ea. .09

De Jur ELDORADO II DELUXE SUPER 8 mm ZOOM PROJECTOR

Built-In Viewing Screen

Professional quality super 8 mm movie projector features built-n viewing screen (or regular projection), automatic reel to real threading, sharp f/1.2 zoom lens, multiple speed control (forward-reverse), instant slow motion, and positive chain and gear drive. 15 0 5204WX Shpg. wt., 20 lbs. 57 monthly

VERSATILE® 1 DUAL PROJECTOR For Both Super & Standard 8 mm

Instant Switching

Model PT-90. At the flick of a switch lets you show standard 8 or super 8 mm Movies. Sprocketless film feed permits automatic reel to reel threading. 2 motors, one for reel drive, the other for cooling lamp and film, Transformer powered, low-voltage, high intensity dichroic lamp for 30% brighter, sharper pictures. F: 1.4 zoom lens provides maximum brillance, instant slow motion—both forward an erverse, multiple speed control, single frame still. Less Viewing Screen, Shog, wt. 20 lbs.

58.00 monthly

Net 159.95 Screen, Shog 15 D 5205WX


\$8.00 monthly

BELL & HOWELL AUTO LOAD SUPER 8 mm PROJECTOR

Sharp 1" f/1.6 lens enhances all home movies. Brilliant Illumination system allows enlarged viewing without light fall off. Design gives you finger-tip control of framing, tilt, and direction. Features automatic loop setter, still picture control, touch threading, and motor cooling switch. Rugged construction has built-in film cutter. Complete with 400-ft, reel. Shop. wt. 20 lbs. 15 b 55019 X Model 356 \$5 monthly Net 81 95



35MM Cameras-Projector

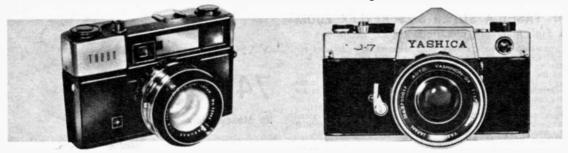

TARON AUTO EE 35mm

NEW! YASHICA J-7 35mm REFLEX Precise 50mm Automatic f1.7

154⁹⁵

CdS Electric Eye Light Meter

No Money Down Super Fast 45mm f1.8 Lens

No needles to line up! Perfect exposures assured by crosscoupled automatic electric eye and shutter mechanism. ASA-10-4CO. Features rapid advance automatic counter, built-in self timer, and warning signal for under or over exposure. 45 mm fl.8 coated and color corrected lens. Focus 30" to inf. thru Range Finder. Speeds B. 1 to 1/500th sec. X synch. Imported. Shpg. wt., 3 lbs. 15 D 7205L \$5 Monthly

Net 52.95

Curtain Type Focal Plane Shutter No Money Down

Precision single lens reflex camera utilizes direct reading shutter coupled CdS exposure meter (ASA range 12-800). Features preview for depth of field determination, microscreen spot for sharp focusing, single stroke film advance, and self timer. Specifications: 50 mm f1.7 6-element lens. Focusing 1.75 ft. to inf. Speeds B 1-1/1000th sec, F Por X synch. Imported. Shpg. wt., 4 lbs.

15 D 36321 \$8 Monthly

Net 154.95

No Money Down



All-in-one Finder

Sharp Super-fast 1/1.8 lens

LYNX 5000 35MM

Two-Stage CdS Meter With Case No Money Down

Set the needle in the finder and SHOOT! The LYNX-5000 combines an easy-to-operate match needle Cd\$ exposure meter with a super-speed f/1.8 lens and a high speed (up 1/1000 sec.) shutter. Features a splitimage focus rangefinder, sensitive two-stage CdS meter with on-off switch and ASA range 10-800. Viewfinder lets you set perfect exposure without removing eye from finder as you compose and focus, Imported Shpg. wt., 3 lbs. With case, 15 D 3613L \$5 monthly ... Net 75.95

MIRANDA "FV" 35MM SLR

Internally Coupled f1.9 lens

Model FV features a sharp internally coupled f1.9 lens which is interchangeable with every other lens in the Miranda line. Brilliant viewfinder brings out details even in dim-mest light, Multi-grid permits precise focusing. Accepts CdS clip-on meter which directing. Accepts CdS clip-on meter which directly couples to camera speed dial. Fine features also include instant return mirror, depth of field preview button, and rapid advance lever. Specifications: 50 mm f1.9 lens. Focusing 17 inches to inf. Speeds 1 to 1/1000th sec. Imported. Shpg. Wt., 4 bs. 15 D 37131 \$7.50 Monthly Net 139.95 15 D 3714L CdS Snap-on Meter Net 25.95

NEW! MIRANDA SENSOREX


Behind-The-Lens CdS Exposure Meter

With Case

 Variable Delay Self Timer No Money Down

Fully automatic SLR camera utilizes cross-coupled behind-the-lens CdS electric eye (ASA range 25-1600 and EV 3-18) and ultra sharp Auto Miranda lens. Multi-spiit-grid re-solves into perfect clarity when pin point focus is achieved. Features interchangeable lens mount, built-in self timer, instant re-turn mirro open dispharam focusing inter-

500 WATT SLIDE PROJECTOR



Automatic Slide Changer

Color Corrected 4 Inch f3.5 Lens

Quiet Fan Cooled Operation

Designed for simplicity of operation and ease of maintenance, 500 westgree for simplicity or operation and ease of maintenance, 500 watt lamp assures sharp brilliant pictures. Projects any 35 mm, Bantam, 127, or instamatic slides, Does not require slide trays. Loads up to 40 slides and allows intermix of different size slides. Uses standard projection lamp. Compact—5%Hx14Lx8½°W. For 105/120 volts 50/60 cps. Shpg. wt., 7½ lbs. 15 D 8401

Net 29.95

COMBINATION GRIP AND BOUNCE FLASH BRACKET

Useful combination of grip and standard utility bracket. "Bounce Flash" bracket with lock allows easy multi-angle flash operation for electronic strobes or standard flash guns. Bracket is also useful for holding exposure meters and other camera accessories. Molded pistol handle affords solid grip. Permits ultra safe carry for your valuable camera. imported. Shpg. wt., 1 ib.

DROP FRONT "PRO"-BAGS



The perfect accessory bag for proforsionals or camera bugs. Heavy duty bags will hold movie, reflex, 35 mm and press cameras, flash guns, bulbs, meters and a host of valuable items. Constructed of durable vinyl material, with red corduroy lining and non-jam

vitn red Cordury (fining and non-jam zipper, Leather loops, hand strap and front key lock.

15 D 1806 PRO 11 Size: 11x9½x15¾4". Shpg. wt. 2½ lbs. Net 8.95
15 D 1807 PRO 13 Size: 13x10x6". Shpg. wt., 3 lbs. Net 9.95
15 D 1808 PRO 16 Size: 16x7x9½". Shpg. wt., 3½ lbs. Net 13.95

Cameras Are Available on Easy Pay Plan-No Money Down

NEW! LAFAYETTE CdS EXPOSURE METER

Only

Shown Actual

Size

15⁹⁵

NOT A KIT!

Completely Wired

Professional Quality Ultra Sensitive

Measures Moonlight, Candlelight, Bouncelight

Now you can achieve correctly exposed photographs from the light of a single candle with this versatile, low cost Lafayette meter. Ultra-sensitive CdS photocell meter utilizes dual light ranges to accurately measure light intensity including extremely low light levels for night or available light photography. Operates comfortably with one hand. A single slide switch controls light range and automatically moves the proper scale into position for easier readings. Measures reflected and incident light with built-in hemispheric diffuser. The meter can be adjusted with a click stop switch to three angles of light acceptance; 15° telephoto, 45° standard and 75° wide angle matching your readings to the camera lens and scene being photographed. Reflex viewfinder with frame markers provide precise area readings for 15° and 45°. Has battery test and "off" position to prolong battery life. External zero adjustment and two mercury batteries (included) assure accuracy over long continuous use. Cushioned jewel mechanism and high impact case, 43°x21²xx13°."D. Imported. Shgg, wt., 13 oz.

99 D 7197L Net 15.95 15 D 1609 Hard leather eveready case w/chain, Wt. 6 oz. Net 3.95

SPECIFICATIONS

Sensitivity: Low Range, 0.44 to 110 footcandles; High Range, 110 to 28,000 footcandles. ASA Film Speed Range: 6 to 12,000 (1° to 12°), Diaphragm Stops: F/0.5 to F/64. Shutter Speeds: 1/4000 second to 30 mlnutes. Movie Scale: 4 to 128 frames per second. EL-LVS Scale: —12 to +22. Acceptance Angle: 15° Tele, 45° Std., 75° Wide Angle. Color Response: 5,600 Angstroms (peak), Photocell Type: Cadmium Sulphide, Batteries: 2 Mercury, (Mallory 625R or

METER

KIT!

Wired

light of a altra-sensitely meast cor avail. A single horizontal distribution of incident usted with telephoto, he camera are mark y test and ment and continuous ½x1 ¾ "D.

Net 15.95

Net 3.95

loo 28,000 agm Stops: ovie Scale: increase Angle: increase per scale: inc

LAFAYETTE TRANSISTORIZED ELECTRONIC STROBE FLASH



15⁹⁵

Lightweight & Compact
 Fully

Transistorized
Operates On 4
Economical
"Z" Cell
Batteries

Now you can have a high-powered transistorized electronic flash that operates from standard AC house current or 4 economical "2" cell batteries. Compact and feather-weight—no power pack is required. Flash duration of 1/2000 seconds for fast pictures. Recycling time: 6 to 8 seconds; color temperature: 5800° Kelvin. Guide number dial for F stop on back. Mounts either vertically or horizontally. Fits any camera shoe. Complete with AC cord, camera cord, and batteries, Imported. Shpg. wt., 2 lbs.

99 D 7184 Net 15.95 99 D 6258 Extra batteries for above (4 req.) Net ea. .05

LAFAYETTE CdS EXPOSURE METER

Only **9**5

Super Sensitive CdS

Meter
Push-Button Battery Test
Circult

• ASA 6 to 12,000

An extremely sensitive Cadmium Sulfide exposure meter. Perfect for all types of photography either indoors or outdoors. Perfect for all high or low level lighting. May be, held in the hand, around the neck, or attached to camera. Film sensitivity scale: ASA6 to 12,000. Exposure time scale 8 sec. to 1/1000 sec. Lens aperture f/1, to f/32. Light value scale (EV): LV4 to 17. Movie scale 8 to 64. Measures reflected or incident light. Complete with mercury battery, leather carrying case and carrying/neck cord. Imported 99 0 7186 Shpg. wt., 1 lb. Net 9.95

FRONT PHOTO FOCUS MONOCULAR

MAKES YOUR CAMERA TELE-PHOTO — Brings Distant Object From 6 to 8 Times Nearer

10⁹⁵

Take-super-telephoto pictures with your single lens or twin-lens reflex camera. The front focus system is specially made for on-camera operation. There is no need to miss those once-in-a-lifetime shots. Increases focal length of your camera lens 6X, 7X or 8X depending on model selected (i.e. 50mm lens plus 8X monocular equals 400mm telephoto). Rugged, lightweight construction — weight only 7½ ounces; is only 5 inches long. Includes series VI adapter ring and leather case. Imported. Shpg. wt., 1 ib.

99 0 7072 6x30 mm Net 10.55 99 0 7073 7x35 mm Net 12.95 99 0 7074 8x30 mm Net 12.95



Make Lafayette Your One Dependable Source for Everything in Electronics

Subminiature Cameras-Projectors



MINOLTA 16-PS SUBMINIATURE CAMERA WITH VINYL CASE

Easy to operate, 16mm subminiature camera, Oversized knurled wheel simultaneously advances film, cocks shutter, advances film counter and prevents double exposure. Exclusive "weather dial" assures perfect exposure settings. Rokkor 25mm 1/3.5 lens. 2 position shutter-speed selector: 1/100th sec, for normal light, and 1/30th for flash. For film from ASA 10-160, Instant drop-in loading.

		Net	20.95
	PS ACCESSORIES. Av. Shpg. wt., 6 oz.		
15 D 3421 Ba	iby BC Flash with capacitor and case	Net	4.95
15 D 3439 Br	acket for Flash and Tri-pod Mounting	Net	1.95
15 D 3447 At	tachment filter set (UV and Y48 Yellow Filter)	Net	1.79
15 D 3448 At	tachment lens set (2 Close-up Lenses)	Net	1.79
	tachment filter set (80A, 81B, and 1A Fitters)	Net	3.59

MINOLTA "16 II" SUBMINIATURE CAMERA

An extremely easy-to-operate, palm-size camera. Sliding camera in An extremely easy-to-operate, paim-size camera. Shoring camera in and out of built-in case advances film, cocks shutter, counts exposure and prevents double exposure—all automatically, 6 shutter speeds from 1/30 to 1/500 sec, plus B. Takes B & W pictures or color prints or color slides that fit any 35mm projector, Oirect viewfinder shows picture exactly as it will appear on film. Lens opening from f/2.8 to f/16, Click-stop settings. With case, Imported 15.8 34161 Shpg. wt., 1 lb.
MINOLTA 16 If Accessories. Avg. Shpg. wt., 6 oz.
15.0 3421 Baby BC Flash with Capacitor and Case

15 0 3422 Bracket for Flash and Tripod Mtg.	Net 1.95
15 D 3423 Aux. Lens Set-2 closeup, I distance, 1 Y filter	Net 4.49
15 D 3424 Color Filter Set-1 ea. 1A, 80A, 81B	Net 4.49
FILM FOR "16 II" and 16-PS - All are 20-exposure ma	gazines.
Shpg. wt., 3 oz.	
15 D 3417L Kodak Panatomic X	Net .98
15 D 3419L Kodachrome II	Net 1.25
15 D 3418L Kodak Tri-X	Net .98
15 D 34501 Ektacolor Negative (color prints)	Net 1.49

MINI-"16" COLOR SLIDE PROJECTOR

Compact, lightweight projector to match Minolta and other 16 mm Sub-miniature cameras, Fold compactly for storage, Sharp 40 mm Rokker F/2.5 lens projects brilliant images equal in size to a 35 mm stide in a 35 mm projector at the same distance. Can be used on table or tripod, includes deluxe vinyl carrying case, standard slide carrier and 75 watt projector lamp. For 110-120 volts AC-DC. Imported. 15 D 3435 Shpg. wt., 31/2 lbs.

YASHICA atoron

ULTRAMINIATURE CAMERA

7995 SAVE \$5.00

WITH BUILT-IN LIGHT METER

USES "MINOX-TYPE" PRELOADED DROP-IN 9.5MM CARTRIDGE

COMPLETE KIT CONTAINS: Flash Unit (cordless), Supple black leather case. Brushed chrome flexible chain with belt clip and 80B and ND4 snap on filters. Imported, Shog, wt., 1½ lbs.

Ī	5 0 3625L \$5 Monthly	Net	79.95
	PRELOADED FILM FOR ATORON		
- 1	5 D 3626L Pkg. of 2, 36 Exposure ASA 125 B&W	Net	1.98
	5 D 3627L Pkg. of 2, 36 Exp. XT-Pan ASA 25 B&W	Net	1.98
P	kg. of 2, 36 Exp. Kodachrome II ASA 25 Color Slides		
- 1	5 D 3628L	Net	2,99
P	kg. of 2, 36 Exp. Extacolor ASA 80 Color Slides		
	5 D 3629L		2,49
3	2 D 4649 Battery for above (2 req.)	ea.	.27

Now you can have the sharpest, clearest pictures ever indoors and out, from the all new lightweight (4 oz.) Atoron camera, finished in out, from the all new lightweight (4 oz.) Atoron camera, finished in brushed aluminum and chrome. Programmed exposure, with shutter speeds 1/45th to 1/250th seconds, Lens openings from F/2.8 to F/16. EV numbers 8.5 to 16, Built-in semi-automatic light meter operates by aligning control wheel film speed marker with exposure meter needle. Yashinon 18 mm universal focus lens with extreme depth of field. Film is loaded thru sliding panel on bottom of camera. Retractable pressure plate assures accurate frame alignment by pulling on film advance. Optical finder with close-up parallax markings, Built-in meter, with medium yellow UV filters that zip into place with a flick of your linger. Comes complete with screw-in, cordless flash unit for rapid conversion to indoor operation.



INSTAMATIC CAMERA OUTFITS

KODAK INSTAMATIC 194 OUTFIT. Automatically gives four brilliant flashes without bulb handling. Photoflash bulbs are enclosed in a revolutionary "flashcube." Pre-sets shutter speed for correct exporevolutionary "Hashcube." Pre-sets snutter speed for collect expo-sure. No dials to adjust. Film loads instantly. Take sharp color of black and white slides or snapshots. Outfit includes camera, wrist strap, flashcube, batteries, and color film cartridge, Shpg. wt., 5 bs. 15 D 26301. Instamatic 104 Net 15.95

strap, flashcube, batteries, and color film cartridge, Shpg. wt., 5 lbs.
15 0 2505. Instamatic 104
Package of 3 Four-shot Flashcubes
15 0 2632 Shpg. wt., 3 oz.
Net ea. 1.79
KODAK INSTAMATIC 154 OUTFIT. The complete foto outfit for the casual photographer who desires quality results. Features new "flashcube" for instant load photoflash shooting. Cube contains four bulbs with reflectors. Eliminates ejecting hot bulbs. Spring wound automatic advance, instant 10-thread loading, and automatic flash exposure sating are among the other features of the versation flash exposure setting are among the other features of this versatile camera. Complete with wrist strap, color film cartridge, flashcube batteries, Shpg, wt., 6 lbs.

15 D 2631L Instamatic 154
Package of 3 Four-shot Flashcubes 15 0 2832 Shpg. wt., 3 oz.

Net 4 95

Popular Accessories—Film

SUPER 8 QUARTZ MOVIE LIGHT

Fit All New Super 8 Cameras

Tilt Head for 90° Bounce

Ultra compact advanced long life 650 watt quartz lamp. Completely die cast housing with universal mount, fits all Super 8 Movie cameras. Features tilt head for bounce lighting: On/Off switch on head; adjust for spot and flood lighting. Complete with cord. Size: 21/2x21/4x 31/4". Shpg. wt., 1 lb. 15 D 8408 Net 13.25



SUPER 8MM MOVIE LIGHT

Compact, powerful 650 watt tungsten sealed beam lamp will provide sparkling, bright indoor movies, Features top mounting and switch on power cord. Will fit all new super 8mm cameras plus all standard 8mm cameras with tripod socket on top, with 6½ ft. cord and exposure guide. Shpg. wt., 3½



15 D 8406

Net 8.49

DELUXE ZOOM MOVIE CASE

Adjustable Shoulder Strap

Nickel Plated Hardware, Aluminum Valance Across Top For Added Strength

Holds virtually any super 8 camera with attached hand grip. Made of exquisite black grip, made of enquisions vinyl material, firm core and fully lined, with French stitching. Ample space also provided for camera accessories; film, lens filters. Size: 11x10¹/4x3³/4". Shpg. Size: 11x1 wt., 2 lbs. 15 D 1805



Dynachrome COLOR FILM

WITH PROCESSING

Beats the High Cost of Color Film Same Fine Pictures

Processing Included Direct To

Your Home

New Dynachrome II film is the newer, faster color film now in demand, Same reversal type, same natural colors, same superb quality. Only the price is different—it's almost like getting the processing free. And the low price includes processing direct to

your morne.		
15 D 1808 8mm, 25 ft. Daylite ASA 25	Net	2.49
15 D 1809 8mm. 25 ft. Indoor ASA 40	Net	2.49
Super 8mm 50 ft. Cartridge Indoor/outdoor ASA 40		
SE D dodos		
15 D 1818L	Net	Z.99
15 D 1818L 35MM, 20 Exo. Daylight ASA 64		
15 D 1819L 35 MM, 36 Exp. Daylight ASA 64	Net	3.19
15 D 1817L 126, 20 Exp. Daylight ASA 64	Net	2.26

FLASH BULBS



Highest Quality -Pre-Tested Insure every

BUY IN QUANTITY AND SAVE In Lots Pkg. Stock No. AG-1B 1 0.9 15 D 1001 1.19 1.19 1.09 15 D 1002 1.39 15 0 4722 AG-3B M2 M2B 1.19 1.29 15 0 1004 12 1.29 M3 15 D 4701 15 D 4702 15 D 1007 1,49 1,39 12 1.49 1 39 ŠB 1.49 15 D 1008

FLASHCUBES

Package of 3, 4-shot flashcubes Net 1.79 **ELEVATOR TRIPOD**

As Low As • Tri-Tilt Head **=** 95

Velvet Smooth Panning

For any small camera — 35mm, reflex or movie. Compact and lightweight...folds to 16", extends to 47" plus 7" with geared center elevator. Single action tilt/pan and 180° swing over for vertical and horizontal format pictures. Positive fock, folding crank. Chrome plated brass legs. Weighs 31 Dz. Immorted Shop wt 216 lbs

Chrome plated brass legs. Weighs 31 Uz. Imported, Shpg. wt., 2½ ibs.
99 0 7029
"PRO" ELEVATOR TRIPDD. Deluxe model for heavier cameras. Aluminum construction. Completely rigid to full height. Extends to 46½", gear drive elevator adds 10". Closes
Pans 360°, tilts 180°. Positive leg stops, rubber tipped

feet. Imported. Shpg. wt., 21/2 lbs. 15 D 7202 Net 11.95

> DELUXE **LENTICULAR SCREEN**



Specially-designed, optically-correct lenticular screen is free of glare, sheen and hot spots. Amazing sharpness and color rendition. Durable vinyl fabric resists fire and fungus. Sturdy chrome tripod legs. Screen is 40x40" Shpg. wt., 12 lbs. 15 D 5005W

FOR NEW SUPER 8 MDVIE ame as above. Screen size 50"x50". Shpg. wt., 14 lbs.

CLASS BEADED SCREEN
Fine grain glass beading for extra brilliance, excellent viewing. Heavy-duty folding tripod adjustable to various heights, Large 30"x40" size. Shpg, wt., 10 ibs.



Now Your Camera Can Use Flash Cubes

Now any camera can use the new flash-cubes! Simple trigger mechanism revolves the cubes with automated convenience. BC type unit for low battery drain. Compact unit takes one 15 volt battery. Push button battery tester light neon bubl, to indicate battery condition. Easy to read ASA exposure table. 7½° Sync-cord with PC Connector fits most cameras. Imported. Shpg. wt., ½ lb. 99 D 7199 32 D 4835 15 Volt Battery (1 req.) Net

(B) LAFAYETTE AG FLASH GUN
Compact, palm size dependable B-C operation. Made for the new
AG flashbulbs. Fan-type reflector measures 2" in diameter when
opened. Shoe fits all standard accessory clips. Features a Computer Dial for determining correct F stop. Testlight, and Bu Ejector. Complete with cord. Dperates on 15V battery (not incl.) 99 C 7105 imported. Shpg. wt., 8 ozs. Net 2.6 32 C 4835 15-Volt Battery for above Net ... Net 2.89

(C) LAFAYETTE BOUNCE BC FLASH GUN

A versatile bounce BC flash gun with many outstanding features. Swivels for intermediate to full bounce light. Reflector completely folds for easy carrying. Positive shoe lock. Accepts AG-1, M2, M3, M5, S & 25 bulbs, Used bulbs are disposed of by a spring action bulb ejector. Bright neon crcuit testlight indicates that circuit is fully energized and ready to "shoot." Completely retractable PC cord Useful exposure indicator dial. Complete with vinyl case.

99 D 7187 Less Battery, Shpg. wt., 1 lb. Imported. Net 3.99 99 D 6027 Battery for above Net .59

Lafayette Cat. No. 671

39

LAFAYETTE Automotive Test Equipment

61/2" DWELL TACHOMETER



- Tunes up Electronically, Any Car Ever Made
- Three Dwell Scales Giant 61/2" Easy-
- to-Read Scale Use to Adjust Carburetors
- Use to Adjust **Points**

31/2" DWELL TACHOMETER



- Tune Up Electron-ically Any Car Ever Made
- 31/2" Double Jeweled D'Arsonval Meter
- For 4, 6 or 8 Cylinder Engines
- For 6 or 12 Volt Systems
- Point Resistance Check

A complete ready-to-use Dwell Meter and Tachometer which will operate on any car ever made. Tests cam Dwell angle and engine RPM on 4, 6 or 8 cylinder cars, 6 or 12 volt right on the engine. Giant 6½ easy-to-read meter makes it simple for anyone to adjust points and carburetors to insure maximum gas economy and quiet engine running. RPM readings are also essential to properly service automatic transmissions. Three dwell angle scales are provided:
0 to 45 degrees, 0-60 degrees, and 0 to 90 degrees. This instrument is suitable for dwell angle adjustment on all foreign and domestic cars. Qual range tachometer 0 to 1000 rpm for precise carburetor adjustments. O to 5000 rpm, suitable for making all other tests at high engine speeds. Complete with instruction manual, Shpg. wt., 4 lbs.

11 0 0101W

Net 28.50

TUNE UP KIT Tunes Engine For

Maximum Efficiency

For Accurate Ignition Timing of Any

A complete kit to tune up the important systems of your car, truck or A complete kit to tune up the important systems of your car, truck or marine engine. Permits maximum efficiency for more economical operation. Kit includes compression tester, vacuum fuel pump tester and deluxe timing light with remote starter switch. Compression tester locates valve, ring, piston and cylinder troubles. Big 2½'' dial is calibrated 0-300 lbs, pressure. Vacuum and fuel pump tester checks pressure and suction of fuel pump and vacuum system. 2½'' dial calibrated in 0-30 inches and 0-3 lbs. Comes with rubber tubing for easy connections. Brilliant prefocused timing light features remote starting switch. For 6, 12 or 24 volt systems. 11 D 4209 Shpg. wt., 5 lbs.

ELECTRONIC CRUISE CONTROL



Fast Idle for Quick Warm-Up



New Electronic Cruise Control enables you to drive at a constant new Electronic Cruise Control enables you to drive at a constant speed by automatically holding the throtte steady. Eliminates the need to keep foot glued to accelerator on long trips. Once you reach desired speed, simply pull out knob and Cruise Control will automatically hold that speed. Allows instant acceleration for passing but takes over again when the foot is taken off the gas pedal. Ceases to function the moment the brake is depressed and completely disengages in the event of any malfunction. Designed to fit all cars and trucks. Shog. wt., 1½ lbs. Electronically tune your carl This Dwell-Tachometer permits setting the carburetor for maximum efficiency, gas economy and greater power; indicates the correct point gap setting electrically (even if the points are pitted or corroded); permits setting points with the distributor cap off and engine cranking, and permits setting points on "Window" distributors with engine running. It also locates defective spark plugs; permits correct engine RPM setting for automatic transmission adjustments, throttle linkage and idle adjustment. RPM scales: 0-30 8-cylinder dwell: 5-45°; 6 cylinder dwell: 2-40°, 4 cylinder readings obained by doubling 8 cylinder scale reading. Two-color scale. Small and compact—measures only 61/xx34x2". Shpg. wt., 2 lbs. Electronically tune your car! This Dwell-Tachometer permits setting

11 D 0105

Net 16.95

DYNAMIC AUTO-MATE AUTO ANALYZER

- No Installation— Plugs in Cigarette Lighter
- Checks Battery, Generator/Alternator, Regulator
- Color-Coded, Self-**Explanatory Dial**

Now you can check the electrical systems of your car from the front seat without digging into the parts of the engine. Plug furnished with large dial meter fits cigarette lighter and tests battery condition, current produced by alternator or generator and proper voltage regulator setling. Measures current flow in the electrical system during starting and running with-color coded meter, Permits positive identification and isolation of electrical trouble. For 120 nearting system chapter of the parts of the 12v negative systems. Shpg. wt., 1 lb. 11 D 7250

LAFAYETTE HOT CAR-GO

- Starts Wet or Cold Motors Instantly
- Saves Battery and Gasoline
- Installs Easily and Quickly
- 6 and 12 Volt Cars



Avoid excess wear and tear on your motor and battery—install Lafay-ette's Hot Car-Go. Provides 5 times the normal spark for fast starting In any weather, and automatically disconnects when engine is run-ning. Will not damage plugs or distributor. Simple to install—Instructions included. Imported. Shpg. wt., 1 lb. 99 D 8511

Lafayette Cat. No. 671

Make Lafayette Your Onc Dependable Source for Everything in Electronics

Professional Quality Automotive Gauges



Big 3 Inch Illuminated Dial Faces

Heavy Chrome Die Cast Case (A) 270° CHAMPION RACING II TACH

Chrome Zinc Die Cast Housing

"Custom" looking full 270° sweep tach designed for the most rugged racing treatment. Large accurate dial face with D'Arsonval movement calibrated from 0 through 10,000 RPM. One-piece unit finished in deluxe chrome zinc die cast housing. 360° mounting permits installation in any position...on the dash, column, etc. Large 3 inch face with heavy calibration marks visible from any position. An attractive addition to any dashboard, For 6 or 12 volt negative or positive ground. Complete with installation kit.

11 D 4217 Shpg. wt., 3 lbs. Net 29.50

(B) CHAMPION TRANSISTORIZED TACH

- Regular or Transistorized Ignition Systems
- 0-8000 RPM—6 or 12 Volts

An attractive, fully transistorized tachometer, factory calibrated for 0-8000 RPM. Large, easy-to-read 3" illuminated dial finished in protective chrome zinc die cast. Precision one-piece tach unit unaffected by vibration. Transistorized magnetic amplifier for constant accuracy. Universal 360° mounting. Complete with installation kit. For 6.or 12 volt positive or negative systems. Shpg. wt., 2 lbs.

11 D 4218 For 8 cylinders 11 D 4219 For 6 cylinders Net 15.95

DELUXE AMP & OIL PRESSURE GAUGE

• Features "Tilt Gauges" In Any Direction



An attractive two in one oil-ampere gauge console, Large illuminated 2" diais tilt in any direction. Dil gauge reads exact pressure from 0.80 lbs. Detects low oil level, incorrect pressure, defective pump or clogged filter before trouble occurs... not after. Sender unit has universal 4a PT connector. Ammeter gives accurate current readings

11 D 4225 Black inlay Net 6.50 11 D 4226 Chrome

CAPACITOR DISCHARGE SYSTEM

- Silicon Controlled Rectifier
- Constant Spark to 10,000 RPM
- Extremely Low Input Power—Less Load On The Engine

Quick, Easy Installation

• Quick, Easy Installation
Combines all the advantages of capacitive discharge with those of solid state circuitry. Patented circuitry eliminates point bounce problems and positively fires plugs regardless of point condition. Fast rise time spark prevents fouling from three to ten times. Point contacts last indefinitely. Elimination of mis-firing, reduces all contaminants, prolonging engine life. Provides associter and more efficient operation at all speeds; constant spark up to 10,000 RPM; with dramatically improved acceleration and economy. Provides faster, easier starting in all weather. Reliability and performance proven on thousands of military, commercial and private vehicles from Alaska to Capa Town, Unit operates with all commercial and original equipment tachometers. Installs immediately with two simple connections to the existing coil, leaving the standard system intact. No temperature limitations—mounts anywhere. Requires only a very small amount of input power—reduces load on engine and electrical load. For 12 volt negative ground system only. Shpg. wt., 2½ lbs. 21/2 lbs.

11 D 8450 \$5 Monthly Shpg. wt., 21/2 lbs.

To Speed Your Mail Order - Please Give Your Zip Code Number

 12 Volt Negative Or Positive Ground 60 Degree Mounting Adjustment

(C) OIL-AMP-WATER GAUGE

All Electric—No Tubing

End guesswork and space problems with this beautiful three-in one gauge. Gives accurate, individual readings of oil pressure, amperage and water temperature. Fits all cars, generator or alternator systems. Amp. gauge reads —60 to +60; oil pressure registers 0 to 80 lbs.; water temperature indicates 100° to 220°. With necessary wire, adjustable mounting ring, senders. Shpg. wt., 2½ lbs.

OIL AND AMMETER GAUGE

(D) GAS SAVER-VACUUM GAUGE

Automatically Shows Miles Per Gallon

Stop gas waste! Handsome chrome plated Gas Saver gauge shows you exactly how to drive for the best economy or power. Works all you exactly now to drive for the east economy or power, works at seasons of the year and during all types of traffic conditions. Meter reads actual miles per gallon. Also checks your engine constantly by measuring its manifold pressure on the clear four color dial. Complete with 6 ft. vacuum line tubing, T connector, steering column mounting ring and instruction. Shpg. wt., 24/2 lbs.

11 D 4205 Net 11.95

DELUXE OIL-AMP-WATER PRESSURE GAUGE

 Features"Tilt Gauges In Any Direction



Custom panel of three illuminated 2" meters which tilt in any direccustom panel of three Huminated 2" meters which tilt in any direction. Oil pressure gauge reads accurately from 0-80 lbs. With a standard 1/6 PT connector. Ammeter gives exact charging rate of generator of alternator from 60-0-60. Mechanical water temperature gauge reads 100°-250°F. Prevents engine damage from slipping water pump, drive belt, low coolant level, defective thermostat, etc. With tubing and adapter. Shpg. wt., 2 lbs.

11 D 4227 Walnut Inlay Net 15.95 11 D 4228 Black Inlay .. Net 15.95

11 D 4229 Chrome Net 15.75



Selected Auto Accessories

CUSTOM-FIT HEADREST

695 • Makes Any Car Seat

Now you can make your car seat really comfortable with this ad-vanced design headrest. Helps pre-vent whiplash too, Dorsal cantilever design keeps headrest snug against

back of neck and head. Locks to back of neck and head. Locks to seat automatically. 3 Knobs, finely calibrated gives 4-way adjustment to custom fit any individual, chair or car seat. Full 5" vertical adjustment; 4" forward and back, Looks like original equipment. Made of soft vinyl plastic with molded wing rests. Shpg.

wt., 2 lbs. 11 0 1201 Black only



A real joy for the sports car enthusiast. An authentic motor driven horn approved as an exact reproduction in sound and appearance by members of antique car, hot rod, and horseless carriage clubs the world over. Chrome plated bell with black wrinkle painted housing. With horn button, wire, bracket and instructions. Shpg. wt., 1 lb. 11 D 3001 6-volt Net 1

DELUXE REVOLVING BEACON



11 D 3002 12-volt

Net 10.29

 Rotates Like a Lighthouse Beacon

A red warning light that rotates 360 degrees and flashes in all directions. Suction mount holds the beacon firmly in place. Signals for help for miles around: creates a safety

ror miles around: creates a safety zone during a traffic emergency: For use on autos, boats, trucks, docks, etc. For 12 volt use; complete with cigarette lighter adapter plug. Shpg. wt., 2 ibs.

BLUE TURRET LENS
Converts Revolving Beacon for use by emergency vehicles, volunteer fire depts., CD units, etc. Shpg. wt., 1 lb.

LAFAYETTE SUPER POWER SKYLITE



- 60,000 Candle Power Search-light Beam
- Automatic Red Blinker
- Completely Waterproof Housing and Switches
 - For Boaters Campers -Truckers Hunters

A deluxe, all-purpose searchlight which throws beams over 1,000 yds. Specially de-signed 4" reflector concentrates beam to penetrate heavy fog, murky water. High impact plastic case and rugged switches are completely waterproof...ideal for skin-divers. Three beam colors: White, Red, Green with separate switches. Operates on 6 standard size "O" cells. With builds, less batteries. Shpg. wt., 2 lbs. Imported

Net 9.95 99 D 9135

Extra set of 3 bulbs for Skylite. 99 D 9136 Net .85

... Net ea. .13

AUTO-TIME STEERING WHEEL CLOCK



Fits All Cars

Operates A Year

36-Hour Jeweled Swiss Movement

 Luminous Hands for Night Driving



Add a stylish custom look, plus an outstanding time piece, to your car's interior. With Auto-Time, the steering wheel clock, steering wheels lose their drab appearance forever as your car's interior gains a new luster. The 36-hour jeweled Swiss movement is shock-proof and anti-magnetic . . . you get perfect time all the time. With luminous hands for night driving, Auto-Time's bold face and sweeping second hand are easy to see. Easy to install, fits all cars from Volkrusgene to Cadillace Shore. Volkswagens to Cadillacs. Shpg. wt., 1 lb. 11 D 1925 Net 12 95

AUTO BATTERY CLOCK Q75

As Low As

 Walnut Finish—Luminescent Dial and Hands A smartly designed and ruggedly constructed battery-operated clock designed for use in the automobile or cabin cruiser. Two-piece mag-netic base for swivel mounting . .

On Single "O" Cell holds tight to all surfaces INCLUDING padded dashboards and is detachable for use in motel or hotel when traveling. Unbreakable polypropolene housing for extra ruggedness. Lustrous silver finished metal dial and trim. Size: 3½x3%x1½,". Walnut finish with luminescent dial and hands, Shpg. wl., ½ lb. Less battery.

Same as above except with ebony and lustrous silver finished metal dial and trim. Same as above but with St. Christopher emblem. Net 9.75

419

99 D 6256 Battery for above

DELUXE AIRWAY UNIVERSAL COMPASS

 Complete with Adhesive Plate for Windshield Mounting

Net .13

Precision instrument features finger-

brated in 5 degree intervals. Universal bracket mounts in any position on all craft and vehicles. Rigid crystal clear plastic with gleaming chrome and black finish. Shpg. wt., 1 lb.

Net 4.19 11 D 6505 Same as above but illuminated.

DELUXE 4-WAY EMERGENCY FLASHER



- Built-in Heavy-duty Flasher and Fuse
- All 4 Directionals Blink On and Off
- Flashing Pilot Light with Audible Click

Simply pull out the switch and all 4 directionals start blinking along with pilot light in switch. Completely separate heavy-duty system cannot overload or damage car's existing light system. Unbreakable mounting bracket for mounting through or under dash, Easy to install; self-insulating connectors. Instructions included. 11 D 8203 Shpg. wt., 1 lb. ..

Battery Chargers-Boosters And Accessories

SCHAUER BOOSTER-CHARGER



 12 Volt Combination **Battery Charger and Booster**

- 50 Amp Booster
- 10 Amp Charger

Perfect for starting cars with discharged 12 volt batteries. Develops a boost charge up to 50 amperes when attached to AC line and batteries, a stricter, sufficient to turn over the average engine. Charges 12 volt batteries at 10 ampere rate in 2½ to 3 hours. Temperature controlled circuit breaker protects rectifiers and charger. Size: 9½s 5½x5½". Shpg. wt., 13¾ tbs.

BATTERY BOOSTER CABLES



Standard equipment for starting stalled cars, charging batteries, etc. Made with heavy duty, flexible rubber-covered cable. Rugged coper-clad positive action grips identified by Black and Red heavy vinyl covered handles. Shpg. wt., 3 lbs.

				_		
11	D	2901	8 ft, long	set of 2	Net	1,19
11	D	2902	12 ft. long,	set of 2	Net	1.69
11	0	2903	12 ft. long,	6 gauge copper cable ery Booster Cable Clips (Red & Black)	Net	3.29
11	D	2905	Set of Batt	ry Booster Cable Clips (Red & Black)	Net	.49



3 DRAWER TOOL CHEST

Electrically Welded Heavy Gauge Steel

Baked Enamel Silicone Treated Finish

Only

All purpose ruggedly constructed 3 drawer carrying type chest. Drawers have full suspension stides. Drawers may be locked in place even if cover is closed. Dimensions: Box—8½0x10¼4Hx20" long; 3 Drawers-71/20x11/2Hx181/4"L. Shpg. wt., 18 lbs. 13 D 1950 Net 10.95

INFRA-RED WINDSHIELD DEFROSTER

 Cleans Front or Back Windshield in Seconds

Plugs into Cigarette Lighter

Suction Cups Mount to Windshield



New infra-red electric windshield defroster utilizes the concept of pend trating infra-red instant heat to quickly nelt away mist, ice, and snow. You no longer have to wait for car to warm up before cleening windshield—just plug it into your cigarette lighter, and start defrosting windshield immediately. Complete with 12 foot cable for reaching back windshield. Two suction cups make mounting fast and easy. Length: 15", Shpg. wt., 1 lb.

11 D 1307 Net 2.75

CAR DEFROSTER GUN AND SCRAPER

Made of hi-impact red plastic with 10 foot cord and plug. 200 watt heat capacity gun plugs into cig-arette lighter. For 12 volt cars only. Imported. Shog. wt., 1 b. 11 D 1402 Net 3.39



INTERPOLITE 150-WATT TRANSISTORIZED INVERTER

- Delivers 150 Watts Continuously
- Fused to Protect Battery



Model PV-150

A low-cost transistorized inverter which changes 12-volt DC to 115volt 60 cycle AC. Delivers 150-watts continuously; 175-watts intermittently for shavers, recorders, radios, TV and many other appliances. Has on-off switch and replaceable fuse. Rugged construction.

Size: 5x5x31/2". Shpg. wt., 51/2 lbs. 11 D 8950

3-AMP. BATTERY CHARGER WITH BUILT-IN METER FOR BOTH 6 AND 12 VOLT BATTERIES

825

Edge view colored meter shows actual rate of charge and indicates battery condition. Reset circuit breaker gives condition. Reset circuit breaker gives automatic overload protection. Has 6 and 12 volt selector switch. Delivers tapering charge. Vented steel case; may be wall mounted. 6 ft. battery leads with 50 amp clips, \$ize 6 x 4½ x 534". For operation from 105-125 Volt. 50-60 cycle A.C. Shpg. wt., 5 lbs. 11 D 7604




2-IN-1 BATTERY CHARGER

End dead battery trouble in your car, boat, truck or tractor. This powerhouse battery charger keeps all 6 and 12 volt batteries fully charged for peak performance even at 40° below freezing. Full 1 amp. "safe" charge rate prevents flacking and plate buckling—same method used by storage battery dealers. Easy to use—plug the line cord into any 120V outlet, connect the two terminals and forget it. Can't overcharge—automatically tapers off. Size: End dead battery trouble in your car, charge—automatically tapers off. Size 6" x 4½" x 5¾". Shpg. wt., 3½ ibs. 11 D 7602 Net 4.50



VL Approved

PROFESSIONAL SIREN-OPERATED BURGLAR ALARM



- Loud, Police-type Siren Gives 3-Way Protection—All Doors,
- Pick-Proof On-Off Key Lock Mounts on Outside of Auto
- Complete—Easy To Install

Get 24-hour protection on your car, station wagon or truck with this complete burglar alarm system. The sharp penetration sound of the police-type siren will scare thieves away. The siren blasts off when anyone opens a door, the hood or trunk. The alarm can be shut off only with the alarm key. Complete system includes siren with trumpet, 4 door switches, hood switch, trunk switch, 2 brackets, electrical lock with 2 keys, wire, mounting hardware, instructions and 2 warning decals. For 12-volt cars only. Shpg. wt., 3 lbs.

Auto Reverbs

AFAYETTE A 3rd Dimension In Sound



NEW DELUXE LAFAYETTE SOLID STATE CAR REVERBERATION SOUND SYSTEM

 For 12 Volt Negative Ground AM and FM Auto Radios-Convenient Under Dash Mounting

Deluxe new solid state tuneable reverberation unit converts your Deluxe new solid state tuneable reverberation unit converts your present car radio into a magnificent sound system offering concert hall realism. Beautifully styled to enhance the decor of your car. Consists of the tuneable amplifier control unit which easily mounts under the dash panel of your car by means of adjustable brackets. 6x9" dynamic speaker and chrome grill for rear seat mounting, and all connecting cables. Includes simple instructions for connecting the reverb unit to your regular car radio system and for separate rear seat speaker. Reverberation is an entirely different approach to sound reproduction. Normal sound reproduction from *Tuneable . . . Electronic Tuning Control. "Custom Fits" the Sound to your Car . to your Ear.

a single source has a flat, one dimensional effect; with proper sound delay thru "REVERBERATION," tones are created with a truly third dimension for concert hall originality. The LRE unit features complete sound control—simplified controls permit balance of sound between front and rear seat speaker. Verb-A-Tone control adjusts the amount of reverberation to your taste. Specifications for 12 volt negative ground cars. peak audio output—4 watts, 2 transistors. Size: 1%x4x9". Shpg. wt., 5 lbs.

Net 24 55 Net 24.95

LAFAYETTE TRUNK-MOUNTED AUTOMOBILE REVERB SOUND SYSTEM

SALE! 1895 was 19.95



- For all 12-volt Negative Ground AM & **FM Auto Radios**
- Simple—Easy Installation
- Solid State Circuitry

The new Lafayette trunk-mounted Automobile Reverberation sound system consists of a solid state amplifier chassis with the reverberation unit, under dash control plate with on-off switch, fader control and interconnecting cables. Includes simple instructions for connecting the reverb unit to your regular under dash auto speaker and to a separate rear seat speaker (not included). Mounts conveniently in the trunk of your car. For all 12-volt negative ground AM or FM auto radios. 0lm.: 8½ x 4 x 2". Shpg. wt., 3 lbs. Net 18.95

Speakers For Transistor Auto Radios 32 D 2204 6 x 9" for 40, 20, 6 ohms. Wt., 2½ lbs. 32 D 2205 6" round for 40, 20, 6 ohms. Wt., 1½ lbs.

Net 3.25 Net 2.75

RADAR SENTRY Warns of Traffic Zones!



 Gives Advance Warning Within 1/2 Mile Range Miniature and

Transistorized Complete With Long Life Mercury **Batteries**


Completely

 Clips Easily on Sunvisor Rugged Printed Circuit

Miniature electronic detector warns you of radar traffic zones up to Miniature electronic detector warrs you or radar traffic zones up to 1/2 mile away. Dual-Band circuit detects all commonly used police radar speed meters and traffic control devices to promote safer driving. Miniaturized and completely transistorized. Top quality components; printed wiring; 8 transistors; two 1,000 hour mercury cell, self-testing batteries (equivalent to 35,000 miles of driving at 35 M.P.H.) Magnesium case eliminates radio, TV and other interfer-

*This item not intended for resale in States where its use is forbidden in motor vehicles by public regulation.

CAR CLEAN—DELUXE VACUUM CLEANER



A smart portable accessory for every car owner...cleans your car in seconds. Just plug it into the socket of the car's cigarette lighter and switch it on to easily vacuum floor mats, seats, headliners, crevices and other hard-to-clean spots. The self contained dust bag assures convenient, clean and sanitary use. The high-powered motor produces strong suction with least possible noise. Beautifully designed of sturdy, high impact plastic with two-tone pastel color finish. Comes complete with 14 foot cord (with on/off switch), and two attachments (one for easy to reach places one for crewices and two attachments (one for easy to reach places, one for crevices and other hard-to-clean spots). Power Source: 12V., DC battery. Imported. Size: 3½" Dia., 13" Length, Shpg. wt., 2 lbs.

11 D 9001

To Speed Your Mail Order - Please Give Your Zip Code Number

Selected Rich Tone Automobile Radios

DELUXE SOLID STATE AM/FM CAR RADIO



. For 12 Volt Negative Ground

*Multiplex adapter available Jan. 1, 1967.

DELUXE VOLKSWAGEN PUSH-BUTTON SOLID STATE AM CAR RADIO



- Designed Especially for VW's Up to 1966 Models
- 5 Watts Superb Audio Power
- 5" External Speaker

Rich, radiant chrome and elegant appointments blend beautifully with the car's interior. Features all-transistor circuit of advanced design which gives a full S watts of superb audio power. Automatic volume control provides constant, even, comfort-level listening. Continuously variable tone control. Five quick-set push ing. Continuously variable tone control. Five quick-set push buttons permit finger-tip station tuning. Seven tuned circuits, including RF stage, give maximum sensitivity, installed in minutes. Includes a free antenna which is designed for the Volkswagen.


17 D 7408

.....\$5 monthly

Net 39.95

PANASONIC RF-1006MD SOLID STATE 3 BAND AM/FM/MB AUTO/PORTABLE





Easy-to-Install 3-Band Car Radio-Slides Out For Take-It-With You Listening Pleasure On Beach, Boat!

Truly versatile 10-transistor portable mounts in your car. Receives AM, FM with AFC and Marine Band (1.6-4.5 Mc) for boating enthusiasts. Plugs into car battery with optional car bracket below. Has telescopic antenna, big S° speaker, tone control, earphone jack and phone jack for crystal or ceramic cartridge. With batteries. 9½/2W23/6Hx534°D. Imported. Shpg. wt., 5 lbs. 17 D 3015L \$5 Monthly Net \$4.85 Universal mounting Bracket with Lock for Auto-Use. (6 or 12 volts-reverse polarity)

99 0 6257 Extra Batteries. 4 required

UNIVERSAL SOLID STATE CAR RADIO



ONLY

- For 6 and 12 Volt Negative or Positive Ground
- **Built-in Speaker**
- Tone Control- Slide Switch

Universal AM radio that is easy to install under the dash offers fine sound reproduction. Features built in speaker, and tone control silde switch. 7 transistors, 2 diodes, RF stage, AVC. Size: 2x434x 61/2". Imported. Sh 17 D 7416

LAFAYETTE SOLID STATE PUSHBUTTON **CUSTOM CAR RADIOS**



4995 with free antenna

 Custom Designed to Fit Space Provided by the Car Maker

No Trim Kits . . . No Drilling . . . No Cutting

Custom designed to fit the space provided in your car. installation is quick and easy. No drilling or cutting is necessary. Its many fine features include ultra-sharp necessary. Its many fine features include ultra-sharp tuning, rich Hi-Fi tonal quality, pushbutton operation, full range tone control, automatic volume control, eye-appeal styling and wide range speakers for outstanding sound reproduction. Fully transistorized circuitry consisting of 5 transistors and 2 diodes gives instant-on action. No warmup period! Requires minimum power from your car's battery. A free antenna is included with each radio. All radios reaching and exceptions. are shipped prepaid, Allow 2 weeks for delivery. Shpg. wt., 9 lbs.

STOCK NO.	FOR CAR	STOCK NO.	FOR CAR
17 D 0112Y	1965 Chevy	17 D 0125Y	1966 Falcon
17 D 0113Y	1966 Chevy	17 D 0126Y	1964-65 Falcon
17 0 0114Y	1962-65 Chevy II	17 D 0127Y	1966 Fairlane
17 0 0115Y	1966 Chevy II	17 D 0128Y	1966 Fair/500
17 D 0116Y	1965 Cheveile	17 B 0129Y	1964-65 Mustang
17 D 0117Y	1966 Chevelle	17 D 0130Y	1965 Plymouth **
17 D 0018Y	1965-66 Corvair	17 D 0131Y	1965 Ply (Fury)
17 D 0119Y	1965 Dart	17 D 0132Y	1966 Ply""
.17 D 0120Y	1966 Dart	17 D 0133Y	1966 Ply (Fury)
17 D 0121Y	1965 Dodge	17 D 0134Y	1965 Valiant
17 D 0122Y	1966 Dodge*	17 D 0135Y	1966 Valiant
17 D 0123Y	1965-66 Coronet	17 D 0136Y	1965 Comet
17 D 0124Y	1965-66 Ford	17 D 0137Y	1966 Comet
*Pelara and	Menace **Except Fury		NET EA. 49.95

Our Finest Performing Solid-State Pocket Radios

LAFAYETTE "SUPER 10" 10-TRANSISTOR POCKET RADIO



- Unique Twin VOLUME and TUNING **Indicator Controls**
- **Quality Superheterodyne Circuit**
- Full Fidelity Speaker Offers Outstanding **Tonal Quality**

Handsomely styled and precision-made 10-transistor pocket radio. Utilizes powerful superheterodyne circuitry with a built-in ferrite antenna to pull in the entire 540 to 1600 KC broadcast band. Exceptionally clear, crisp tonal quality from push-pull audio output circuit and 21/4" speaker. Twin volume and tuning indicator controls. Slim and compact. Powered by an inexpensive 9-volt battery—plays instantly without warm-up. Supplied complete with black vinyl case, earphone and 9-volt battery. Imported. Shpg. wt., 1 lb.

Net **6.95** Net .21 99 D 6021 Extra battery for for above ____

NEW! LAFAYETTE "MIGHTY-15" 15-TRANSISTOR POCKET RADIO

Complete with Carrying Case, Battery, Earphone

Operates on 9-Volt Battery or 110V 60 Cycle AC Household Current with Optional AC Adapter

Powerful Superheterodyne Circuit

New, attractively styled, precision-made powerful 15-transistor pocket radio. Features an AC jack—so you can save your battery by operating this fine radio on 110V AC house current with the optional AC adapter listed below. Dustanding tonal quality from push-pull audio output circuit and 2¼" speaker. Automatic volume control circuit minimizes annoying fading and sudden blasts of volume. Handy thumbwheel controls for volume and tuning. Earphone included for private listening, You also get a leather carrying case and one 9-volt battery. Size: 4¼x2½x1½". Imported.

17 D 4211£ Shpg. wt., 1 lb.
17 D 3101 AC Adapter for above radio, wt., 1/2 lb.
99 D 6021 Extra 9V battery for above radio

DELUXE 12-TRANSISTOR FM-AM

DELUXE MICRO RADIO IN JEWEL CASE



 Uses Long Lasting Mercury Cell **Batteries for More Power and**

Longer Battery Life Elegant Solid Cast Polished Trim . . . with Wrist Strap

• Measures 2¼" x 1%" x 1"

Deluxe micro radio in a beautiful jewel case is an ideal gift for any occasion. This remarkable radio has 8 silicon transistors, 2 diodes and I thermistor to give you big radio performance in a miniature size. Specially designed high efficiency dynamic speaker magnificently reproduces all of your favorite standard AM stations. Automatic volume control does away with fading, Imported. Shpg. wt., 2 lbs. Net ea. .42

32 D 4637 Extra Mercury batteries, 2 req. _

POCKET RADIO

was 22.90

Complete with vinyl carrying case, battery, earphone and AC adapter

 Powered by Battery or 110V AC House hold Current with AC Adapter



Supersensitive, compact 12-transistor FM-AM pocket radio. Superbly styled die cast front. Large 2½" dynamic speaker has full tonal quality. Precision slide rule dial. Push-pull audio amplifier for greater output. FM RF stage. Telescopng antenna for FM, and built-in ferrite core antenna for AM reception. Powered by single 9-volt battery or operates on 110V AC 60 cycle household current with AC adapter (included). Size: 3"x4"x1½". Shpg. wt., 4 lbs. imported. **Net 18.95**

99 D 6021 Extra 9-voit battery for above

Lafayette Cat. No. 671

Make Lafayette Your One Dependable Source for Everything in Electronics

Thrill to World-Wide Short Wave Broadcasts

11 BAND 18 TRANSISTOR LAFAYETTE SHORTWAVE PORTABLE

- FM/AM/MARINE/LONG WAVE and 7 SW BANDS
- Operates on 6 "C" Cell Batteries or 117V AC Household Current with optional AC Adapter

Only O NO MONEY

with Earphone and batteries





Worldwide radio listening pleasure and excitement is yours with this superb portable. 7 SW Bands (4-9Mc, 5.92-6.2Mc, 9-12 Mc, 9.5-9.7 Mc, 11.7-11.9 Mc, 15-15.5 Mc, 17.7-17.9 Mc) for thrilling shortwave broadcasts as well as 4 bands for FM, AM, Marine (2-4 Mc), and long wave (150-400 Kc). Horizontal slide rule dial with rotating cylindrical dial scale for zontal slide rule dial with rotating cylindrical dial scale for precise and accurate tuning. Features tone control and AFC to eliminate drift on FM. For Improved audio reproduction, extended side band reception can be switched in to produce hi-fi sound by means of a "Hi-Fi-DX" switch. Large ferrite bar antenna for LW and MW bands, and a multisection whip for SW and FM bands. 2-way speaker system consists of a 4" woofer and 1½" tweeter. 18 Transistors, 9 diodes, and 1 thermistor. Separate jacks for external antenna, earphone, AC (with optional adapter), speaker, and phono. Size: 13x8x5" with batteries and earphone. Imported. Shpg. wt., 12 lbs. 17 D 6915WX \$5 Monthly 17 D 6915WX \$5 Monthly Net 99.95

DELUXE 14 TRANSISTOR 3 BAND

Extra "C" batteries for above. 6 required 99 D 6257

Net ea. .13

AC Adapter for playing radio on 117V AC.

Net 4.95

ROYAL DELUXE 15 TRANSISTOR 4 BAND PORTABLE



1 Year Supply of 12 Batteries

• AC Adapter for Plug In Play

• Earphone for Private Listening

Tunes the standard broadcast band 50-1600 Kc; marine band -1.7 -4.7 mc.; shortwave band 5-12 mc., and FM band 88-108 mc. Features 15 transistors, 6 diodes, and 1 thermistor. Advanced circultry includes an FM Automatic Frequency Control, powerful push-pull audio output circult, and separate tone control. Telescopic antenna "brings in" distant stations. AC adapter permits operation on 117 VAC without the use of batteries. Case is trimmed in elegant walnut veneer finish. Complete with 12 batteries. AC adapter, and earphone. Size 10x8x3" Imported. Shpg. wt., 6 lbs. 17 D 6912L \$5 Monthly

Radios Are Avallable on Easy Pay Plan-No Money Down

AM/FM/SW PORTABLE vith AC Jack. Batteries, and Earphone No Money Down

Superb 3 band portable radio operates on standard AM, FM, and 4.12 MC shortwave band, AFC lock switch prevents drift on FM. Color coded vertical stilde rule dial, Convenient jack permits 117 volt AC household current operation with optional AC adapter listed below. Large 4" dynamic speaker for outstanding sound reproduction. Separate tone control. Features push button night dial light and local-distance switch, Size: 61/x10x3" Imported. Shpg. wt., 7 lbs. 17 D.6918. \$5 Monthly.

Net 39.95 17 D 6918L \$5 Monthly 17 D 6919 AC Adapter for Above Net 4.95

13 99 D 6256 Extra Batteries for above, 4 reg. . Net ea Lafayette Cat. No. 671

www.americanradiohistory.com

Quality Portable Radios for Fine Performance

10-TRANSISTOR AM/MB/VHF SOLID-STATE PORTABLE



with earphone and batteries

Covers: AM Broadcast Band 54-160 KC Marine Band 2 to 6 MC VHF Aircraft Band 108-135 MC

Listen to aviation control towers, monitor aircraft frequencies, hear marine weather reports as well as standard AM broadcasts Large 3½" full-range speaker offers fine sound reproduction. Slide rule tuning dial. Operates on A populate heateries as well as Operates on 4 peniging batteries as well as 110 VAC house current with optional AC adapter listed below. Beautiful black leather-like plastic cabinet. Dimensions: 634 x 45% x 2½". Imported. Wt., 5 lbs. 17 D 7816L

Net 29.95 AC Adapter, Wt., 1/2 lb. Net 3.95

Extra Batteries, 4 required

3 BAND AM/FM/MB SOLID-STATE PORTABLE



- 1 Yr. supply of 12 batteries
- Plug in AC Adapter
- Earphone

For superb performance on the AM, FM and Marine bands this rugged radio uses 10 transistors, 7 diodes and 1 thermistor. Slide rule and vernier tuning provide 11:1 tuning rule and vernier tuning provide 11:1 tuning ratio. Also features telescoping whip antenna for FM and Marine band, AFC for driftless FM, tone control, earphone Jack for private listening, local/long distance switch, and 3½" dynamic speaker. AC adapter permits you to play radio using 117V AC. Complete with rugged vinyl case with shoulder strap, earphone, batteries. Imported. Shpg. wt., 3 lbs. 17 D 6917L \$5 Monthly Net 33.95 phone, batteries. Impor 17 D 6917L \$5 Monthly

(A) DELUXE FULL-SIZE LAFAYETTE CRITERION® I AC AND BATTERY OPERATED FM-AM PORTABLE RADIO

• 11 Powerful Transistors, 6 Diodes, 1 Thermistor

 Large 4" Speaker Offers Life-Like Hi-Fidelity Sound Reproduction

With Earphone, AC Adapter, and Batteries

AFC Locks-In FM Stations

Engineered To The Highest Electronic Standards

Enjoy the remarkably static-free tone of FM and the great variety of AM stations which this superb low-cost portable has to offer. This deluxe full-size "set," (9 x 6½ x 3½~"D), features one RF and 3 IF stages to give you features one RF and 3 IF stages to give you real pulling power of stations both near and far. Big 4" speaker delivers full-tone high-fidelity sound. AFC circuit makes drift virtually non-existent. Geared tuning with large circular tuning dial pinpoints FM and AM stations easily, Built-in carrying handle is recessed to hold 33" telescoping FM

antenna. Spacious interior contains 7" ferrite antenna. Spacious interior contains 7" ferrite antenna for powerful AM reception and 4-cell battery compartment. Economical home use is available with accessory 6-volt power supply which connects to 110-120 volt AC house line. Luxurious break-resistant black plastic case with satin chrome grille. Complete with earphone, AC adapter, and batteries. Imported. Shpg. wt., 3½ bbs. 99 D 3519L Net 24.95

"C" Batteries (4 required)

99 D 6257 Net ea. .13

15-TRANSISTOR AC/DC FM-AM PORTABLE WITH AUTOMATIC TIMER

 Features Automatic Timer Which Will Gradually Turn The Radio Off at A Preset Time— Up to 30 Minutes

No Money Down • Large 3" x 5" Speaker

AFC on FM Prevents Drifting

Now you can lull yourself to sleep with this exciting FM-AM portable radio. Features an automatic timer switch. You set the time dial to the approximate length of time (0 speaker offers glorious sound reproduction. To 30 minutes) you want the radio to play attractive vinyl case. 15 Transistors. Size:

—as the radio nears the end of this preset 9 x 6% x 234" Imported. Shpg. wt., 7 lbs. time, the sound will fade away gradually until the radio turns off completely. Deluxe radio also features AFC to prevent drift on

17 D 7815L \$5 Monthly . Net 34.95 Extra "C" Type Batteries for above (4 req.) 99 D 6257 Net ea. .13

© SOLID STATE AC/BATTERY-OPERATED AM RADIO

Tuned RF Stage

Beautiful Ebony Leatherette Covered Case

Vernier Tuning Dial

Superb full-size AC/battery operated port-able. Large 3%" full-range dynamic speaker to insure mellow full tonal quality. Sensitive 8 transistor superheterodyne circuit features a 3-gang condenser and tuned RF stage. Vernier tuning dial for precision tuning of entire AM broadcast band. Operates up to 500 hours on 4 economical flashlight batteries. Built-in AC adapter circuit permits

operation directly from 115 VAC. Self-storing AC cord. Housed in a beautiful ebony leatherette covered cabinet and handle. Supplied with earphone and batteries. Size 834 x 3 x 544". Imported. Shpg. wt., 5 lbs.

17 D 7906L Extra Batteries for Above (4 required) 99 D 6257

DELUXE 15-BAND GLOBETRAVLER ALL-TRANSISTOR AM/FM/SW RADIO

No Money Down.

· For Use As Portable, Home Radio, Auto Radio, Boat Radio

The deluxe 15-band Globetravler AM/FM/SW radio offers a wide variety of features making it adaptable for portable, home, auto, or marine operation. The entire world autu, or marine operation. The entire world of radio listening pleasure and excitement is at your finger tips. Features standard AM broadcast band, FM, Marine Band, LW Weather-Navigation Band and 11 shortwave bands. Features 6 x 9" full range speaker and push-pull 4-watt amplifier for outstanding reproduction. Separate jacks for earphone, external speaker, phonograph, recorder, and separate amplifier. A built-in ferrite antenna for AM, a telescopic antenna for FM, and an additional telescopic antenna for SW increases its sensitivity and selectivity. Also includes tuning meter and battery

tester, AFC on FM, noise filter on AM and SW, and separate bass and treble controls. 14 transistors and 12 diodes. Wood cabinet covered with scuff-proof black vinyl. 121/aW x 81/6H x 4"D. Imported. Shpg. wt., 12 lbs. Net 169.95

17 D 7201WX \$9 Monthly

Universal Mounting Bracket with lock (6 or 12 volts) 17 D 7202 Net 22.95

AC Power Supply adapts Globetravler for home use 17 D 7203 Net 13.55

Size "D" Flashlight Batteries. 5 required 99 D 6256

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down



A LAFAYETTE'S FINEST FULL-SIZE AM-FM PORTABLE

Engineered to the Highest Electronic Standards

For Battery and AC Operation



24⁹⁵

Includes AC Adapter Batteries Earphone



Powerful Circuitry Offers Extremely
High Sensitivity and Selectivity

B 15-TRANSISTOR AC/DC FM-AM PORTABLE with Automatic Timer



only 34 95 No Money Down

SOLID STATE AC/BATTERY OPERATED AM RADIO



only 1795
With Batteries and Earphone

D DELUXE 15-BAND GLOBETRAVLER ALL-TRANSISTOR AM/FM/SW RADIO

• 14 Transistors

TUNING RANGE

AM Standard Bro	adcast 540-1600Kc
FM Broadcast Ba	
MB Marine Band	1.5-3.5Mc
LW Weather-Navi	gation 150-400Kc
80 meter band	3.61 to 3.84 MCS
61 meter band	4.60 to 4.89 MCS
59 meter band	4.84 to 5.13 MCS
49 meter band	5.90 to 6.26 MCS
41 meter band	6.96 to 7.40 MCS
31 meter band	9,35 to 9.90 MCS
25 meter band	11.50 to 12.16 MCS
19 meter band	14.85 to 15.70 MCS
16 meter band	17.38 to 18.35 MCS
13 meter band	20.95 to 22.10 MCS
11 meter band	25.15 to 26.58 MCS

• 12 Diodes



For Use As A Portable, Home Radio, Auto Radio, Boat Radio 169 No Money Down

Our Finest Table Radios



The Longest Radio We Have Every Offered!

A Lafayette 3-Band FM/AM/SW Twin-Speaker Table Radio

No Money Down

B Lafayette Twin-Speaker Solid State FM-AM Table Radio in **Beautiful Oiled Walnut Wood Cabinet**

No Money Down



C Decorator Styled Solid State FM-AM Table Radio in **Elegant Oiled Walnut Wood Cabinet**

5095 No Money Down



A LAFAYETTE 3-BAND FM/AM/SW TWIN-SPEAKER TABLE RADIO

- Now You Can Own A Distinctive 2 Foot Long Radio
- 2 Large 6x4" Speakers Give Outstanding Sound
- Built-in AFC For Highly Stable FM Reception

A three band table radio of unique slim design which will be a conversation piece in your home. Listen to your favorite music programs on static-free FM, AM broadcasts as well as the exciting night time shortwave programs on 3.9-12 Mc

... foreign stations. Reproduces true high fidelity sound through two wide-range 6 x 4" speakers. Automatlc frequency control circuit (AFC) eliminates the need for constant returning of fastations due to drift. Continuously variable tone

control permits bass and treble adjustments to your taste. Colored pilot lamps on dial face show which band is in use. Built in AM antenna and external wire shortwave and FM antennas. Speaker jack is included for connection of an additional remote speaker. Plastic cabinet has ebony finish. Size: 24¼W x 6¼M x 5″D. For 110-120 volts, 50/60 cycles AC. Imported. Shpg. wt., 9 lbs. 17 D 7805WX \$5 monthly Net 32.95

C DECORATOR STYLED FM-AM TABLE RADIO

A masterpiece of design and engineering. Unique vertical shape, slender depth, surrounded by magnificent rosewood cabinet. This styling is matched by powerful solid state circuitry of 9 transistors, 5 diodes and 5 rectifiers. Two speaker sound system (6½" and 2½") provide full rich sound. Other exciting features include

giant vertical slide rule dial with lighted pointer and satellite indicator for easy pinpoint tuning; automatic frequency control for stable FM reception and continuous tone control. Size: 113%W x 147%H x 5½°°D. For 110-120 volts, 60 cycles AC. Imported. Shpg. wt.. 12 lbs.
17 0 3013WX 55 monthly Net 59.95

B NEW! LAFAYETTE SOLID STATE TWIN-SPEAKER FM-AM TABLE RADIO

- Deluxe Oil Walnut Veneer Cabinet with Brush Gold Panel
- Twin 4" Full-Range Speakers Offer Magnificent Sound Reproduction
- AFC Lock Prevents Drift on FM

Superb new Lafayette twin-speaker FM-AM table radio offers magnificent performance and handsome styling. Iwo large 4" speakers provide room filling high-fidelity sound with exceptional clarity. Powerful 16-semiconductor circuit has an output of 1 watt. Automatic Frequency Control (AFC) lock prevents drift on FM. Has big slide rule dial for precision tuning. Four

controls: Selector (AM-FM-FM/AFC), On/Off Volume, Tone, and Tuning. Housed in a handsome oiled walnut veneer wood cablnet with brushed gold control panel and rich grill cloth. Size: 65% x 14½ x 45%. Operates on 105-120 V AC, 50/60 cycles or 105-120 V DC. Imported. Shpg. wt., 7 lbs.

17 D 0110W \$5 monthly

Net 34.95

D DELUXE STEREOPHONIC AM-FM TABLE RADIO

Now you can listen to full dimensional FM stereo as well as AM with this beautiful table radio. Full rich high-fidelity sound is achieved through a pair of "pullaway" speaker cabinets each containing a 6½" bas-midrange speaker and a 2½" tweeter. Speakers cabinets may be easily detached to locate them more conveniently anywhere in a room for more stereo



SUPERB NEW 3-BAND SOLID-STATE FM/AM/SW TABLE RADIO

39⁹⁵

- 2 6x4" Dynamic Twin Speakers For Full Dimensional Sound
- Precision Slide Rule Dial with Logging Scale
- No Money Down Functional Indicator Lights

Smartly styled 3-band FM/AM/SW table radio. All solid-state circuitry features instant on operation. Listen to thrilling SW broadcasts as well as brilliant FM and standard AM broadcasts. 2 6 x 4" dynamic twin speakers offer outstanding sound reproduction. AFC control prevents drift on FM. 4 controls: On/Off Volume, Tone,




SOLID-STATE AM TABLE RADIO

10⁹⁵

- Large 4" Dynamic Speaker
- Attractive Styling
- 1-Watt Output

Our finest AM solld-state table radio. Ideal second radio for your home. Perfect for the kitchen or the children's room. Attractively styled. Large 4" dynamic speaker is powered by 8 semi-conductors. Offers instant-on operation. 1 watt output. Operates on 105-120V AC 50/60 cycles or 105-120 V DC. Beautiful ebony plastic cabinet. Measures 9½" x 5" x 3¾". Shg. wt., 3 lbs. Imported. 17 0 7909 Net 10.95



SOLID STATE FM-AM TABLE RADIO

- . Handsome "Jet Age" Styling
- Powerful 3"x5" Full-Range Speaker
- AFC Prevents Drift On FM

Lovely to look at, delightful to hear, this top quality FM-AM table radio with "Jet-Age" styling features all solid-state circultry for instanton operation. Powerful 3" x 5" full range speaker. Separate tone control to emphasize bass or treble response. Automatic frequency control (AFC) on FM locks in stations for drift-free reception. Beautiful walnut veneer cabinet with chrome face piate. Size: 1036" x 536" x 342". For 110-115V AC 60 cycles. Imported. Shpg. wt., 4 lbs.

www.americanradiohistorv.com

clock radios..... magnificent rich sound



DELUXE LAFAYETTE SOLID STATE AM AND FM-AM CLOCK RADIOS

In Beautiful Walnut Veneer Cabinets

FM-AM CLOCK RADIO No Money Down

AM CLOCK RADIO

2495

LAFAYETTE FM-AM CLOCK RADIO

One of the finest FM-AM clock radios we have ever offered. Powerful 15 semi-conductor solid state circuit has an undistorted output of 1 watt—gives you instant sound without any warm-up time. Continuous tone control plus silde rule dial for precision tuning. AFC lock prevents drifting off stations while listening to FM. Large 4", wide-range dynamic speaker for magnificent rich sound. Full Feature Telechron clock has a lighted dial for telling time in the dark. Sleep Switch lets you fall asleep to music (can set sleep switch up to 60 minutes), and after you are asleep radio can automatically turn itself on at a preset time. If you then wish to catch an extra few winks of sleep, just press the snooze button and the radio will turn off for 10 minutes. Radio is housed in a beautiful walnut veneer cabinet with a brushed gold control panel. Built-in FM and AM antennas. Dim. 65%x14½x4x4½". Operates on 117V AC 60 cps. Imported. Shgg. wt., 6 15». 17 D 0107 \$5 monthly

LAFAYETTE AM CLOCK RADIO

Handsomely styled with all the features of the above FM-AM clock radio, but without FM. Dim: 111/4x61/4x43/4" Operates on 117V AC 60 cps. Imported. Shpg. wt., 5 lbs.

52 Lafayette Cat. No. 671

DECORATOR STYLED AM-FM SOLID STATE CLOCK RADIO

AM-FM Clock Radio of Enduring Beauty

No Money Down • Full Feature Telechron Clock

High styling distinguishes this FM-AM ciock radio. Magnificent walnut cabinet will enhance the decor of any room in your home.

14 semi-conductor solid state circuit gives you "instant-on" from a large 4" speaker. Features include slide rule precision tuning dial, full feature Telechron clock with a sleep switch and alarm, lighted clock face and alarm indicator, plus built-in antennas for both AM and FM reception. This outstanding radio will lull you to sleep and turn itself dff. The next morning it awakens you to lovely FM or AM music. Size: 12½x55½x7½". Operates on 1174 60 cycle AC, UL Approved. Imported. Shpg. wt., 5 lbs.

Net 49.95 17 D 3022 \$5 monthly

Radios Available on Easy Pay Plan-No Money Down

MINIATURE SOLID STATE FM-AM (C) CLOCK RADIO

Fulf Feature Telechron Clock

AFC Lock Prevents Drift on FM
Only 7½" x 5" x 3¾"

No Money Down

Miniature, quality FM-AM Clock Radio—ideally sulted for homes or offices where space is limited. Does not sacrifice performance because of size. Features large 4" x 2¾" dynamic speaker. AFC lock prevents drift on FM. Slide rule dial for precision tuning on both FM and AM. Powerful 16-semiconductor solid state circuit. Full-feature Telechron clock soothes you to sleep. Turns radio off automatically, and then wakes you up to beautiful music. Also, includes alarm and lighted dial. Smartly styled walnut grained plastic cabinet measures 7½" x 5" x 3¼". Operates on 117V 60 cycle AC. Imported. Shpg. wt., 3 lbs.

17 D 7908 \$5 monthly

Net 36.95

Net 39.95

Exciting Selection of TV Sets



12"* PORTABLE UHF-VHF

Lightweight and Compact

DELUXE PANASONIC CT-66L VHF-UHF 19" TABLE MODEL COLOR TV

No Money Down

- . Beautiful Color Fidelity and Brightness
- Built-In Automatic De-Gaussing System
- 19" Rectangular 90° Deflection Tube

Beautiful 19" Color TV set of enduring beauty featuring a 19" (measured diagonally) rectagular color picture tube and an automatic de-gaussing system. Bright, rich color fidelity. Keyed AGC provides a brilliantly clear, sharp, and steady picture. Luxurious walnut cabinet, elegantly slim compact styling. Advanced circury—28 tubes, 1 transistor, 13 diodes, 4 silicon power rectifiers. Front mounted speaker provides superb sound reproduction. Front controls for easy, fast, convenient tuning. With earphone for private listening, dipole VHF antenna and matching consolette legs. Dim: 211/6" x 261/2" x 201/6". Imported. Shpg. wt., 100 lbs.

17 D 3012WX \$19 monthly

Net 399.95



9"* SOLID-STATE BATTERY OPERATED VHF-UHF PORTABLE TV

Great For Home—Car—Boat

Lightweight, Solid State Design
 Overs Channels 2 Thru 83

Compact, complete transistorized 9"% (overall diagonal measurement) portable TV set. Keyed AGC noise limiter and AFC circuits provide high picture stability even in fringe areas. Uses AC power or portable power pack (optional) or any 12V DC battery in a car or boat (with optional power cord). With 82-channel tuner; 3 x 5" front speaker; 9%4H x 9½W x 81%4"D.

17 D 1708WX Shpg wt., 14% ibs. Imported ... Net 99.00 Portable Power Pack. Includes battery, battery charger, carrying case.

17 D 1709 Shpg wt., 9 lbs. ... Net 24.95
17 D 1707 DC Power Cord for above. Shpg. wt., 1 lb. ... Net 3.95
32 D 4743 Replacement Rechargeable Battery, 6 lbs. ... Net 9.94


NEW PANASONIC 9" UHF/VHF TV WITH BUILT IN FM-AM RADIO **And Automatic Timer**

159⁹⁵

Delivers Superb Performance No Money Down

The latest in viewing and listening pleasure. The 9 inch (diagonal), 90° deflection aluminized picture tube gives a brilliantly clear and full 39.2 sq. inches—for all the family to see clearly, even in broad daylight. Set the auto timer for up to a full hour of viewing (or listening) pleasure—then relax, even fall asleep, and the set turns itself off. FM/AM radio features a slide rule dial for trouble free tuning, big 4" x 2½" speaker for full rich sound. AFC to prevent station drift on FM. Built in whip antenna for radio listening pleasure. Swing up UHF antenna for hard to get stations. Wood grain finish. Imported. 8¼" x 12¾" x 9". Shpg. wt., 13½ lbs. 17 C 3023WX \$8 monthly.

For a Complete Selection, See 1967 Lafayette Catalog 670

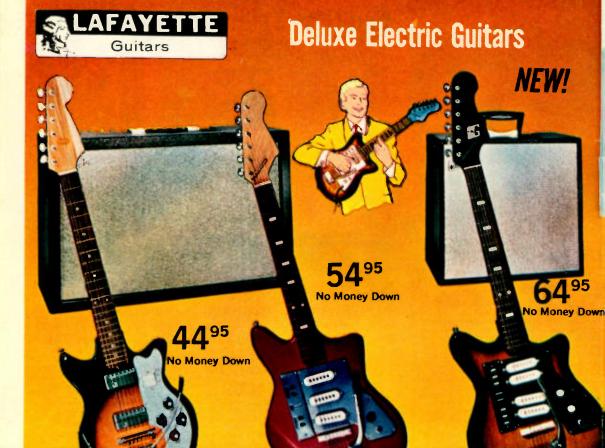

DUAL PICKUP ELECTRIC GUITAR WITH TREMOLO TAILPIECE

- · "Adjustable" Steel Reinforced Warp-proof Neck
- Solid Mahogany Body
- 3-piece Laminated Neck

Solid Molded Vinyl Case 99 D 9143W# Shpg. wt. 3 lbs. ____ Net 10.95

NEW! 3 PICK-UP LARGE BODY ELECTRIC GUITAR

- . True "Vibrato" Torsion Bar
- · Detachable, Adjustable, Steel Reinforced Neck
- Double Cutaway, Beveled Body

Swingin', 3 magnetic pickup guitar features slim, fast, blonde neck, 6 chrome machine heads, 7 "pear!" Inlay markers and 20 frets on a rosewood fingerboard. Adjustable bridge, volume, tone and rhythm controls plus individual pickup switches and heavy chrome tremolo bar. Highly polished pick guard resists scratches. Hand rubbed finish, in gleaming "candy apple", metallic on fine mahogany stock. Complete with neck strap and cord. Imported. Shog. wt. 12 lbs 99 D 9139WX 55 Monthly ... Net 54.95 99 D 9139WX \$5 Monthly Net 54.95

Solid Molded Vinyl Case 99 D 9143WX Shpg. wt. 3 lbs..... ... Net 10.95

NEW! 4 PICK-UP LARGE BODY ELECTRIC WITH "VIBRATO"

- Genuine Mahogany Body-Contour **Cut Back**
- 4 Controls, 6 Switches, 4 Pickups
- Adjustable Steel Reinforced Neck

Slick! solid! professional sounding 4-pickup guitar with fast, silm neck, 6 machine heads, plus adjusting screws for each string. 7 "pearl" markers and 20 frets, on rosewood fingerboard. Adjustable bridge, 2 volume controls, 2 tone controls, plus slide switches for channel 1 and 2 with selection of mic 1 or 2, solo or rhythm positions. Heavy duty tremolo bar and chrome pick guard plus input jack. Hand rubbed, shaded finish on select mahogany. Complete with neck strap and cord. Imported. Shpg. wt. 13 lbs.

99 D 9140WX \$5 Monthly

Net 64.95

99 D 9140WX \$5 Monthly Net 64.95

Solid Molded Vinyl Case 99 D 9143WX Shpg. wt. 3 lbs. _____ Net 10.95

up to \$24.70 on COMPLETE OUTFITS

Each electric guitar outfit consists of a guitar, amplifier, case, tremolo foot switch, neck strap, pickup cord and extra set of 5 steel strings. 16 page instruction book with chords, illustrated fingering positions and "strum" along favorite songs plus instruction received. tion record

45 lbs. 60 lbs. 37 lbs. 47 lbs. 62 lbs. 38 lbs. 48 lbs.	104.95 136.95 191.95 113.95 145.95 199.95 122.95 154.95 208.95
	35 lbs. 45 lbs. 60 lbs. 37 lbs. 47 lbs. 62 lbs. 38 lbs. 48 lbs. 63 lbs.

Musical Instruments Are Available on Easy Pay Plan-No Money Down

Our Finest Electric Guitars





"CAPRI" DOUBLE CUTAWAY 2 PICK-HP ELECTRIC GUITAR

- 2 Powerful Adjustable Pickups
- 7 Controls for Maximum Versatility
- "Hi-Response" Tremolo Tailpiece

Styled for a professional look and feel. Mahogany body with contour cut back. Rosewood fingerboard has 20 frets, celluloid binding, and seven inlaid pearl position markers. Laminated neck with steel reinforcing rod. Adjustable compensating roller bridge. Deep sparkle pickguard. Dual volume controls, tone control, and individual switches including rhythm/solo switch. 39" Long, 12" Wide, 13%" Deep. Cool "mint green" and metallic teal-blue finish—hand rubbed to a super gloss. Imported Shoe.

Molded Vinyl Case Net 10.95 99 D 9143WX

PROFESSIONAL 4 PICKUP SOLID BODY ELECTRIC GUITAR

- . 6 Self-Cancelling Selector Switches
- . Slim, Rounded Fast Action Neck
- "Hi-Response" True Vibrato Tailpiece

Designed for the professional musician. Carefully-contoured and beveled double cut-away design. Neck reinforced with adjustable steel rod. Six self-cancelling push button selector switches for instantaneous tone changes. Automatic selection of correct pickup combinations. Separate master tone and volume controls. Precision machined heads. Rosewood fingerboard with 21 close spaced frets, len iniald position markers. Fully adjustable pickups — Hand rubbed shaded mahogany finish. Size: 42° long, 13½° wide, 1½° deep. Imported. Shpg. wt., 14 lbs.

99 0 9117WX \$5 monthly .. Net 74.95

PROFESSIONAL CUTAWAY HOLLOW BODY ELECTRIC

- "Hi-Response" Tremolo Tailpiece
- Auditorium Size-42½"x17½"
- · Laminated Arched Top and Back

True professional design. Laminated maple neck with oval rosewood fingerboard. Six large iniaid position markers and nickel silver frets. White, pin-striped celluloid binding on top and back edges. Nickel plated hardware, de luxe machine heads, two sensitive pickups with individually adjustable pole pieces. Five controls permit choice of units, vary tone and volume, select between bridge pick-up for solo and forward pick-up for rhythm work. Shaded walnut finish with golden sunburst. Size 42½x17½x3½". Imported. Shog. wt. 18 lbs.

99 D 9121WX \$5 Monthly

Net 49.95

Sturdy Case for Above.

_ Net 9.95

SAVE UP to \$25.70 on COMPLETE OUTFITS From individual catalog prices; SEE PAGE 58 For Lieblag Augustion No.

Each electric guitar outfit consists of a guitar, amplifier, case, tremolo foot switch, neck strap, pickup cord plus extra set of 5 steel strings. 16 page instruction book with chords and illustrated finger positions, strum along favorite songs plus instruction record.

Outfit No.	Description	Shpg. Wt.	Net
99 D 9163WXM	Guitar 99 D 9107WX with 13 D 0135WX Amplifier	37 lbs.	113.95
99 D 9164WXM	Guitar 99 D 9107WX with 13 D 0133WX Amplifer	47 lbs.	145.95
99 D 9165WXM	Guitar 99 D 9107WX with 13 0 0136WX Amplifier	62 lbs.	199.95
99 D 9166WXM	Guitar 99 D 9117WX with 13 D 0135WX Amplifier	39 lbs.	131.95
99 D 9167WXM	Guitar 99 D 9117WX with 13 D 0133WX Amplifier	49 lbs.	163.95
99 D 9168WXM	Guitar 99 D 9117WX with 13 D 0136WX Amplifier	64 lbs.	217.95
99 D 9169WXM	Guitar 99 D 9121WX with 13 D 0135WX Amplifier	43 lbs.	108.95
99 D 9170WXM	Guitar 99 D 9121WX with 13 D 0133WX Amplifier	53 lbs.	138.95
99 D 9171WXM	Guitar 99 D 9121WX with 13 D 0136WX Amplifier	68 lbs.	194,95

Depend on Lafayette for Everything in Electronics



AFAYETTE "Popular Priced" Electric Guitars



A "VALUE" CUTAWAY SOLID BODY ELECTRIC GUITAR

28⁹⁵

- Sensitive Magnetic Pick-up
- Steel Reinforced Neck
- Individual Volume and Tone Controls

The perfect instrument for the budget-minded musician, be he beginner or advanced. Fea-tures double cut-away solid body construction for that true "twangy" electric guitar sound. Other features are a sensitive magnetic pickup with individual tone and volume controls. 20 frets with 6 marked positions. Comes complete with neck strap, cord and highly pollished sunburst finish, slize: 39Hx12Wx14" Deep, Imported. Shpg. wt., 12 lbs. 99 D 9022WX Net 28.95

CARRYING CASE for above. Shpg. wt., 3 lbs. 13 D 8712WX Net 8.95

3495 No Money Down

- True Vibrato Tailpiece
- Steel Reinforced Neck
- Individual Volume Controls

• Individual Volume Controls

Vibrant, dynamic tone! Smooth body of top quality solid mahogany. Thin, 264% graceful neck of reinforced maple. Fancy rosewood fingerboard with 20 fret and 6 inlaid pearl position markers. Individual machines, adjustable bridge and chrome striped pick-quard. 2 adjustable pick-ups, 2-position switch (solo-rhythm), 2 volume and 1 tone control plus input jack. Ourable sun burst finish. Chrome and black tallplece. Size: 384-2H x 12W x 144"0. Imported. wt. 10 lbs. 99 D 9137WX S5 monthly Net 34.95 CARRYING CASE for above. Shpg. wt., 3 lbs. 13 D 8715WX Net 8.95

B NEW! 2-PICK-UP CUTAWAY

SOLID BODY ELECTRIC GUITAR

C NEW! 3-PICK-UP DUAL CUTAWAY SOLID BODY ELECTRIC GUITAR

No Money Down

- 3 Powerful Adjustable Pick-ups
- Detachable, Steel Reinforced Neck
- Tremolo Tailpiece—Adjustable Bridge

Sleekly styled, dual cutaway solid body of select mahogany. Slim neck for fast fingering. Shaped, white celluloid-bound rosewood fingerboard, with 20 frets and 7 pearl position markers. Precision individual machines. Adjustable bridge, tremolo tallplece, 3 magnetic pick-ups with individual rocker switches. 2 volume controls plus input jack. Nich-elosc hand-rubbet finish. Complete with High-gloss hand-rubbed finish. Complete with neck strap and cord. Size: 39Lx12Wx1¼"D. Imported. Shpg. wt. 7 lbs. 99 D 9138WX \$5 monthly Net 44.95

CARRYING CASE for above. Shpg. wt., 3 lbs.
13 D 8715WX Net 8.95

Musical Instruments Are Available on Easy Pay Plan-No Money Down

Musical Instrument Amplifiers







No Money Down

4995

5-WATT HEAVY-DUTY BASIC AMPLIFIER

- Top Mounted Controls For "Easy Reach'
- Separate Volume & Tone Controls
- Two Instrument Inputs

A dynamically designed 5-watt straight AC musical instrument amplifier. Top mounted controls and panel for "easy reach" operation. Separate volume and tone controls. Full size high-quality speaker. Speaker cone is specially treated for full brilliance of tone and long trouble-free life. AC isolation achieved through a rugged power transformer. Sturdy wood cabinet covered in beautiful black leatherette. Inputs are provided for two instruments. Pilot light operates with on-off switch, Uses no-slip rubber feet and useful carrying handle. Size: 11Hx 13Wx64/"D. For 117 volts 50/60 cycles AC. Imported. Shpg. wt., 11 |bs.

Net 29.95

PORTABLE 8-WATT SOLID STATE TREMOLO AMPLIFIER

- Self-Contained Battery Pack/Or May Be Operated On Household AC
- All Transistor Circuitry

Lightweight transistorized guitar amplifier for use anywhere. Heavy-duty cabinet with handle, covered in black vinyl. Front panel contains: Pilot light, On/Off switch, 2 inputs for 2 guitars, 4 controls: Tremoto has 'depth' and 'speed'; Tone and Volume. has depth and speed; fone and volume.
Full size high quality speaker. Back panel has input for foot operated tremolo switch, plus switch for battery or AC operation.
Takes 8 batteries. Size: 14Hx1134Wx6°D. Imported. Shpg. wt. 12 lbs.

99 D 9142WX \$5 monthly Net 39.95

BATTERIES for above. 8 Required.

99 D 6256 Net ea FOOT-OPERATED REMOTE CONTROL for tremolo 12 D 6701 Shpg. wt., 1 lb.

NEW! 10-WATT TREMOLO/ "REVERB" AMPLIFIER

- Tremolo Speed Strength Controls
- · "Reverb" Control
- Top Mounted Controls for "Easy-Reach"

A deluxe "Reverb" amp with full dynamic A deluxe "Reverb" amp with full dynamic sound! That no guitarist professional or novice should be without. Smartly styled, sturdy vinyl covered wood cabinet, with carry handle and attractive grille cloth. Top mounted controls: Off/On/Volume control with indicator lamp, tone controls, reverb control; tremolo with Intensity and speed controls. Inputs for 2 instruments plus specially designed 8" speaker for that "swingin" sound. Powerful 10 watt amplifier has AC Isolation through a heavy-duty power transformer. Size: 184-9wx151-9hx6"D. power transformer. Size: 18½Wx15½Hx6"D. Imported. Shpg. wt. 14 lbs.

99 D 9141WX \$5 Monthly Net 49.95

COMPLETE OUTFITS

From Individual Catalog Prices

Each electric guitar outfit consists of a guitar, amplifier, case plusneck strap, pick-up cord, extra set of 5 steel strings, 16 page instruction book with chords, illustrated fingering positions, and "strumalong" favorite songs, plus instruction record.

	5 WATT OUTFITS		
Outfit No.	Oescription	Shpg. Wt.	Net
99 D 9148WXM	"Value" Electric Guitar 99-9022WX	25 lbs.	59.95
99 D 9149WXM	2 Pick-Up With Tremolo 99-9137WX	25 lbs.	69.95
99 D 9150WXM	3 Pick-Up With Tremolo 99-9138WX	25 lbs.	78.95
	PORTABLE 8 WATT TRANSISTORIZED DU	TFIT	
99 D 9145WXM	"Value" Electric Guitar 99-9022WX	25 lbs.	72.95
99 D 9146WXM	2 Pick-Up With Tremolo 99-9137WX	25 lbs.	77.95
99 D 9147WXM	3 Pick-Up With Tremolo 99-9138WX	25 lbs.	87.95
	10 WATT "REVERB" TREMOLO OUTFIT	rs	
99 D 9151WXM	"Value" Electric Guitar 99-9022WX	33 lbs.	81.95
99 D 9152WXM	2 Pick-Up With Tremolo 99-9137WX	33 lbs.	86.95
99 D 9153WXM	3 Pick-Up With Tremolo 99-9138WX	33 lbs.	95.95

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down



YETTE **Amplifiers**

Musical Instrument Amplifiers

NEW! 40 WATT "TREMOLO"-"REVERB" AMPLIFIER

- Hammond "Reverb" Unit For Echo-Like Effect
- Pulsating "Tremolo" For "Go-Go" Effect
- 2-12" Heavy Duty Special Design Jensen Speakers (EM SERIES)
- . Enjoy "Reverb" and "Tremolo" Separately or Together With Foot Switch Control
- Two Channel, 4 Instrument Inputs

Remarkable reproduction, finest craftsmanship, make up this 40 watt dual amplifier. It produces "tremolo" and "reverb" effects separately or simultaneously. Crisp lively sound is produced by 2-12" Jensen musical instrument speakers and 8 dual tubes, used to provide 13 tube design, "fremolo" has 'speed' and 'intensity' controls for maximum effect. "Reverb" has 'intensity' control. 4 inputs for 'normal' or 'bright', handles up to 4 instruments. Separate volume and tone controls for channel 1 and 2. Inputs for "reverb" and "trèmolo" foot operated switch. 3-position switch for power/on/off and standby. Large red lamp for 'power on' indication. Large output transformers for heavy-duty operation. Full 1/2" plywood cabinet, covered in black textured scuff resistant vinyl with handle. "T" nut factory installed for easy mounting of "dolly." Size: 18¾" H x 30 ¾"W x 10 ¾" D. Shpg. wt., 45 lbs.

Net 149.50 Pula Foot Switch For Remote Control of Tremolo and Reverb

Dual Foot Switch For Remote Control of Tremolo and Reverb 12 D 6708 Shpg. wt., 1 lb. FOR DOLLY SEE LISTING BELOW

25-WATT MUSICAL INSTRUMENT AMPLIFIER WITH TREMOLO

- Two Channel Amplifier
- Big 12" Jensen Speaker With Large 14.7 oz. Ceramic Mag.
- 4 Instrument Inputs
- Jack For Remote Tremolo Control

• Jack For Remote Tremolo Control
You get faithful reproduction of every note and tone played with minimum hum for clear, undistorted sound. The built-in, heavy duty speaker by Jensen, featuring a 14.7 oz, ceramic magnet, was specially designed for use in musical instrument amplifiers. Couple this with 25 big watts and you will have truly "big tone" performance. Dynamic AC chassis utilizing 6 tubes, 3 dual purpose tubes used to provide 9 tube design. Four Instrument inputs are provided for outstanding versatility. Two-channel amplifier has 2 volume and 2 tone controls—one for each channel. Features a remote control foot switch Jack for colorful tremolo operation, plus 2 tremolo controls—speed and intensity, for utmost flexibility. Other outstanding features include: on-off-standby switch; pilot light; top-mounted fuse; rugged carrying handle; magnificent brushed aluminum top-mounted control panel. Rugged 1/2" plywood case covered in shimmering black vinyl. "T" nut factory Installed for easy mounting of "dolly." Size: 171/21 x 21 x 101/2" D. For 117 volts 50/60 cycles AC. Shog. wt., 30 lbs.

Net 89.95 Foot switch for remote control of tremolo. Shog. wt., 1½ lbs.

Foot switch for remote control of tremolo. Shpg. wt., 1½ lbs.
12 D 6701 Net 2.99 See Listing Below, for Amplifier Dolly.

15 WATT MUSICAL INSTRUMENT AMPLIFIER WITH TREMOLO

- Big 12" Jensen Speaker
- 3 Instrument Inputs

A deluxe 15-watt tremolo amplifier with big 12" specially designed speaker by Jensen. Provision for three instrument inputs. Jack provided for tremolo foot switch. Handy carrying handle. Controls: volume, tremolo speed, tone. AC chassis utilizing 4-tube circuitry. 3 dual purpose tubes, used to provide 7 tube design. Handsome brushed aluminum top mounted control panel for "easy reach." 1/2" plywood cabinet covered in luxurious black vinyl. On-off witch activates night light 5/22- 15/44 x 16/44 x 16 switch activates pilot light. Size: 1534H x 1642W x 10°D. For 117 volts 50/60 cycles AC. Shpg. wt., 20 lbs. 13 D 0135WX \$5 monthly

Foot switch for remote control of tremoto control. Shpg. wt., $1\frac{1}{2}$ lbs. 12 D 6701 Net 2.99

UNIVERSAL DOLLY FOR MUSICAL INSTRUMENT AMPLIFIERS

Ideal for use with any amplifier that is larger than 21" wide and 91/2" deep. High quality steel ball bearings on 3 inch silent steel casters. Complete with "1" nut, 3/4 inch securing screw with black knurled handle. Perfect for use with Lafayette 25w, 40w and bass instrument amplifiers. Shpg. wt., 4 lbs.

Use Lafayette's Easy Pay Plan. No Money Down









Bass Guitars & Amplifier





SOLID BODY ELECTRIC BASS

- "Hi-Response" Magnetic Pick-up
- Adjustable Steel Reinforced Neck
- Fully Adjustable Bridge
- Contoured Cut Solid Body of Mahogany

Clear, true bass tones are yours, with this finely constructed bass. 4 individual chrome-plated machine heads for precise and accurate tuning. Sturdy 3 piece laminated neck, celluloid bound rosewood fingerboard, of the construction of the constru neck, celluloid bound rosewood ingerboard, 20 frets, 6 large white inlay markers for easy positioning. Beveled, contoured body in shaded mahogany finish. "Pearlized" pick guard, volume and tone controls. Complete with neck strap and cord. 46L x 15½W x 13½°D. Imported. Shpg. wt., 15 bs.

99 D 9124WX \$5 monthly Net 49.95

Sturdy Case for above bass. Shpg. wt., 3 lbs.

ELECTRIC BASS OUTFIT: includes 99 D 9124WX electric bass, 13 D 0137WX 50 watt bass amplifier, 12 D 6710WX case plus "Modern Electric Bass Guitar Method" book. Shop, wt., 57 lbs.
99 9173WXM \$9 monthly Net 163.95

DELUXE 2 PICK-UP ELECTRIC BASS

- Long Slim-Fast Action Neck
- Adjustable Steel Reinforced Neck
- Individual Volume Controls

Lively, attractively contoured, beveled body of select mahogany woods, with hand-rubbed shaded finish. 4 chrome-plated machines, celluloid bound rosewood fingerboard with 20 fret positions and 6 white inlay markers. Chrome pick guard, 2 powerful magnetic pick-ups with individual controls, adjustable bridge, tone and 2 volume controls plus input jack. Complete with neck strap and cord, 46L x 15½W x 1¾°D. Imported. Shpg. wt. 15 lively with reck strap and cord, 46L x 15½W x 1¾°D. Imported. Shpg. wt. 15 lively was strained to the strained with reck strap and cord, 46L x 15½W x 1¾°D. Imported. Shpg. wt. 15 lively was strained with reck strap and cord, 46L x 15½W x 1¾°D. Imported. Shpg. wt. 15 lively was strained with reck strap and cord. wt., 15 lbs. 99 D 9123WX \$5 monthly

Net 64.95 Sturdy Case for above. Shpg. wt., 3 lbs.

Net 10.95

ELECTRIC BASS OUTFIT: Includes

Musical Instruments Are Available on Easy Pay Plan-No Money Down

- Powerful 15" Special Design Jensen Speaker with 27 oz.
- Projects "Big Bass Sound"
- Excellent For Use With Regular Guitar, Accordian and Combo-Organ
- Rugged 3/4" Plywood Cabinet, Covered With "Shimmering" Black Vinyl
- · "Easy-Reach" Top Mounted Control Panel

Fabulous, full bass sound with a minimum of distortion. Durable specially designed speaker, response from 40 to 40,000 cycles. Brushed aluminum control panel will handle Brushed aluminum control panel will handle up to 3 instruments. Inputs: bass, high and low. 2 slide switches for 'deep' or 'sharp' bass. 3 controls: treble, bass and volume. Neon pilot lamp indicates power/on, Fuse and 3 position switch for power/on/stand-by/off. Super power chassis has powerful 5 tube circuit, 3 dual purpose tubes used to provide 8 tube design, plus heavy duty transformers, provide greater output. Cabinet has attractive gray and silver acoustical cloth plus ribbed vinyl carry handle. Factory installed "T" nut makes dolly mount simple. 117 volt 50/60 cycle AC. Size: 19¼ x 23½ x 12¾ c 40ep. Shpg. wt., 37 lbs. 13 D 0137WX \$6 monthly _______ Net 119.95 SEE PAGE 58, for matching dolly.

Rich-TONE Acoustic Guitars



A 7 PIECE "ECONOMY OUTFIT"

 Everything You Need Including A Beginner's Record Course to Start You Off Right

7-piece special gultar outfit with beginner's instruction book and record course. You get: gultar, gultar bag, instruction book and record course, 3 gultar picks, extra set of strings, neck cord. Gultar has hardwood body with spruce top, highly polished finish with steel reinforced neck. White stripling around top edge and sound hole. Imported. Shg. wt., 9 lbs.

13 D 8723WX Complete Outfit

Net 19.95 13 D 8724WX Guitar Only, Shpg. wt., 7 lbs. ... Net 14.95

(B) CONCERT SIZE CLASSIC GUITAR

Quality sound at a moderate cost. Steel reinforced neck, rosewood fingerboard with pearl position markers, slotted headplece keeps strings in place. 6 tuning machines with plastic rollers. Finely finished mahogeny, back and sides, complete with clear spruce top. Intricate pearl inlay around sound hole. Sturdy reinforced bridge of rosewood. Imported. Shpg. wt., 10 lbs. 12 D 6711WX



(C) CONCERT SIZE CLASSIC GUITAR

Superior sound, matched only by guitars costing much more. Steel reinforced neck, rosewood fingerboard with side position markers, 18 frets and slotted headpiece to keep strings properly aligned. Quality tuning machines covered by plastic rollers to help keep them free of dust. Handsomely finished in classic, flamed maple, back and side, with natural white spruce top. Imported.

12 D 6712WX Shpg. wt., 10 lbs. Sturdy Case For Above. Shpg. wt., 4 lbs. 13 D 8741WX Net 8.95

OUR FINEST CLASSIC GUITAR

 Nylon Strings
 Concert Size Fan Braced Top

Highly polished clear walnut finish on back, sides, and neck. Pure grain white spruce top. Round soundhole is inlaid with 20 alternating black and white concentric lines. Black celluloid-bound rosewood fingerboard with heavy nickel silver frets inlaid with four pearl position dots. Rosewood bridge; slotted headplece; heavy white machine stems; steel-reinforced 2" neck. Imported.

13 D 8742WX \$5 monthly, Shpg. wt., 11 lbs. Net 34.95 Same as above but with folk type neck, steel strings, and celluloid 5-STRING BANJO

Complete With Carrying Case

BARITONE UKULELE

- Excellent Tonal Quality
 Beautiful Finish
- Great for Both Beginner and Expert

This baritone ukulele features beautiful finished sides, back, and neck—it's a real eye catcher! Top edge is finely bound with celluloid. Inlaid pearl position markers aid finger location. Strings are carefully gauged true-tone nylon. The sound hole is bound with black and white celluloid and is decorated with inlaid purfling. White patent pegs and a white bone nut add the finishing touches. Gives the warmth of tone and ease of response to satisfy any player 13 D 8730WX Imported. Shpg. wt., 4 lbs.

4-PC "COMBO" DRUM OUTFIT

Big Sound Drums-Bongos

Complete With Brushes Sticks

14" x 20" single-tension bass drum with permanent-type tom-tom and cymbal holders. permanent-type tom-tom and cymbal holders.

14" x5½" snare drum with separate tension flanged hoop, metal snare, professional throw-off. 12" x 8" tom-tom with separate tension, flanged hoops. 12" cymbal, drum pedal with adjustable beater and springs, disappearing spurs, snare-drum stand, holder for tom-tom sticks. Metal parts are highly nickel plated. Bright sparkle finish. Imported. Shpg. wt., 45 lbs.

13 D 8701WX \$6.50 monthlyNet 119.95

5-PC "PRO" DRUM OUTFIT

Complete width 16"x16" floor tom-tom

Meets professional demands for sound and quality in every way. Each drum has completely adjustable tension rods for quick and easy tuning. The set consists of: Bas drum with double fast action pedal (14" x 20"), Snare drum (5½" x 14"), Tom-tom (9" x 13"), Floor tom-tom (16" x 16") and 14" brass cymbal; plus handy shell mounted tom-tom holder and cymbal holder with titer. Snare features non-creep flush base stand. Complete set of brushes and sticks with every set. Drums have long-lasting scuffevery set. Drums have long-lasting scuff-resistant sparkling finish. Imported, Shpg.

12 D 6713WX \$9 monthly ___

(G)

SNARE DRUM

Complete with Stand, 10" Cymbal Brushes, Sticks

An exciting snare drum at a low Lafayette price. 14" x 51/2" separate tension snare drum with metal snares, tone modulator, heavy duty throw-off, flanged hoops, rolled rims, nicked plated hardware, Bright sparkle finish, Complete with deluxe flat base stand. 10-cymbal, sticks, brushes, instruction book. Imported. Shpg. cymbal, st

13 D 8705WX \$5 monthly

(H) PROFESSIONAL TUNABLE BONGOS

Pure white perfect calfskin heads for best rhythm effect. Sparkling color finish. Sturdy constuction with heavy plated hardware. Four tuning-lugs on each bongo. Head sizes: 734" and 642". Overall 7" deep. Complete with Tuning Key. Imported. Shgs. wt., 5 lbs. 13 D 8704W

THE "BIG BEAT" BUILT-IN **COMPLETELY TRANSISTORIZED AMPLIFIER** AND SPEAKER!

- Double Cut Away Solid Mahogany Body
- 3 Piece Laminated Neck with Adjustable Truss Rods

An exceptionally fine guitar with a "Show-Stopper" finish, PLUS a built-in specially designed and engineered miniature transistorized amplifier and speaker! Auditorium size, 404xx1342". The self-contained amplifier affords perfect portability with the tone range and volume of "stationary" amplifier units. May also be used with any external guitar amplifier. With external jack and cord. Imported. 99 D 8087WX \$5 monthly. Shpg. wt., 15 lbs. Net 49.95 99 D 6021 Batteries for above (2 required) ___ Net ea


K 12 STRING DUAL PICK-UP SOLID **BODY ELECTRIC GUITAR**

- Tremolo Tailpiece Steel Reinforced Neck
- Compensating Adjustable Bridge

Slim fast action neck, with celluloid bound rosewood fingerboard including 6 inlaid pearl positions. Heavy-duty chrome-plated individual machines with plastic covered gears and metal pick-guard. 2 slide, switches control individual or concurrent operation of supersensitive pickups. Tone and volume controls, Beautiful hand rubbed red sunburst finish. Length 41", Body 18", Imported. Shpg. wt., 15 lbs.

13 D 8750WX \$5 monthly



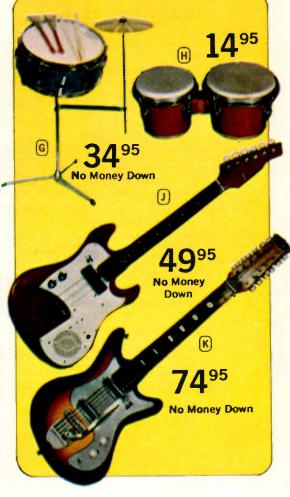



4 PIECE COMBO OUTFIT

- "All-Weather" Plastic Heads
- Slick, Modern Styling
- Bright Sparkle Finish

Designed with the demanding young drummer in mind! Beautiful styling combined with sensational sound, makes this combo a perfect outfit for either the beginning or the more advanced drummer. Set consists of a new "rapid response" 12" x 5" Power Snare; 18" x 11" fiber shell constructed Bass; solidly built 12" x 7" Tom-Tom; and a deep sounding 12" x 12" floor Tom-Tom with adjustable legs. Also deep sounding 12 A 12 moor form form with adjustable legs. Also features 10" spun brass cymbal, sturdy Cowbell and Block, bass foot pedal with 3-ply felt beater ball, adjustable snare stand, a Bass Muffler for wide range tone control, sticks, and 2 tension keys for precise tuning. Bright sparkle finish with high chrome rims. Shpg. 28 lbs

13 D 4850WX \$5 Monthly

3 PIECE DRUM OUTFIT

Same as above, less 12" x 12" floor Tom-Tom. Shpg. wt., 23 lbs. 13 D 4851WX \$5 Monthly Net 69.95





(A) CLARINET OUTFIT

Complete outfit consists of a quality clarinet made entirely of selected grenadilla wood. Tuned for the key of Bh, Boehm system, 17 keys, 6 rings. Mouthpiece, cap, ligature, reed, music lyre, swab, grease cup and quality case of plush-lined fabric covered veneer. Imported. Shog, wt., 8 lbs.

13 D 8710WX \$5 monthly

Net 79 95

(B) TRUMPET OUTFIT

An outstanding trumpet that combines beauty of design with rugged serviceability. Beautiful professional styling with nickel-silver tubing and trim. The valves feature nickel silver construction with top springs and slotted no-twist guides for excellence of action. Body is of brass, clear lacquered finish. Complete with mouthpiece, music lyre and plush-lined case with large accessory compartment. Imported. Shpg.

wt., 14 lbs. 13 D 8709WX \$5 monthly

(C) ALTO SAX OUTFIT

A professional instrument in every sense of the word . . . with smooth, light key action and rich, full tone. Integral one-piece tone holes, drawn from the body. Has removable key guards, genuine mother-of-pearl-fingertips on keys, and extra-heavy reinforced bottom guard. Equipped with popular Cs. Bh. Cs with articulated Gs and automatic high F key. Bp. B. Cs and C keys located on right side are facing forward to prevent contact with clothing. Precision-crafted with clear lacquered brass finish. Comes complete with accessories in deluxe Gladstone type

case with silk plush lining, Imported, Shpg. wt., 20 lbs. 13 D 8711 \$8 monthly



HOW TO PLAY THE GUITAR

The easy way to learn all the chords and rhythms on your guitar. Has vocal accompaniment; ballad styles; folk, country and western; rhythm and blues; shuffle beats. Features guitar demonstration and text by George Barnes, spoken commentary by Bob Mersey. 24 D 4506 Shpg. wt., 1 lb.

Net 3.50

BEGINNING THE FOLK GUITAR

Famous "Music Minus One" Records!

Designed for the new-comer to the world of playing the folk guitar. The course is covered with both a book and a LP record. This lets you hear as well as read what you are playing, Shpg, wt., 1 lb. 24 D 4508

(D) SETH THOMAS ELECTRONIC METRONOME

Precision instrument, contains 2 complete electronically calibrated beat systems; audible and visual, 40 to 208 beats per minute. Single knob control, calibrated radial dial plus neon light. Wooden cabinet, operates on 115 V AC 60 cycles.

13 D 4453 Walnut

Shpg. wt. 3 lbs. ...

13 D 4454 Mahogany

..... ..Shpg. wt. 3 lbs. Net 16.95

(E) SETH THOMAS KEYWOUND METRONOME

The original Seth Thomas metronome, from America's first and only manufacturer of keywound metronomes. A useful aid in music and dancing instruction, or wherever beat timing is important. Adjustable pendulum permits selection of beat tempo from 40 to 208 beats per minute. Selected hardwood case finished in walnut, Height 8 % "Base 4 1/2"

13 D 4450 Shpg. wt., 2 lbs.

13 D 4452 Above but mahogany finish, wt., 2 lbs....

(F) SETH THOMAS TRANSISTOR METRONOME

The perfect musical gift. A beautiful transistor metronome styled in the classic metronome shape. Features, high quality transistors in a sealed movement, distinctive, precise metronomic click with adjustable sound selector, easy-to-set tempo selector knob, attractive brushed gold colored dial, 40 to 208 clicks per minute. Select hardwood cabinet has non-marring felt feet. Size: 5½,4%6,5½,83½,4°D. Walnut Finish. With two 9 volt batteries. Shpg. wt., 3 tbs.

13 D 4451 13 D 4455 Mahogany

Net 18.95

99 D 6021 Replacement batteries for above 2 required Each

BUDGET PRICED" MUSICAL AMPLIFIER

 3 Instrument Inputs 3 Tube Amplifier With Built-in Speaker



Now anyone can enjoy the sounds of an amplified guitar, with this simple "budget-priced," guitar amplifier, Brushed aluminum control panel has on/off switch, separate volume and tone, plus 3 inputs for other musical instruments. Smartly styled, wooden case, covered in pebble grained finish of black vinyl, with tweed textured baffle cloth in front. Plus sturdy carry handle of plastic. Shpg.

13 D 0139W

Watches - Clocks - Timers

PRECISION - SWISS STOP WATCHES

As Low As

R50



Accurate Jeweled Movements

- Unbreakable Main Spring
- Anti-Magnetic Hair Spring

(A) 1/10 SECOND TIMER

Designed for close timing. Large hand registers 1/10 of a second, up to 30 seconds; small hand reads minutes, up to 15. Start, stop, and continue from crown; instant zero. 7 Jewel movement. Chromium plated case, Imported, Shpg. wt., 8 oz. 13 D 3103L Net 9.15

Same as 13 0 3103 above) except 1 jewel. 13 0 3102L

Net 8.50

(B) 1/5 SECOND TIMER

Ideal for Sports

Second hand registers 1/5 of a second and completes turn in 50 seconds. Small hand indicates up to 30 minutes. Side slide starts and stops hands. Fast resetting dependable 7-jewel movement, imported Shpg. wt., 8 oz. 13 0 3104L

Same as 13 0 3104 (above) except 1 jewel. 13 D 3105L

Net 10.95 Net 9.50

NEW! TV LAMP CLOCK

∩75

Ideal for use on a TV cabinet, in the kitchen or baby's room.
Provides soft illumination and
precise time. Attractive sturdy plastic case with gold trim. In walnut. Size: 4x7x3%" Deep. Shpg. wt., 3½ ibs. U/L approved

14 D 6001 14 D 6002 White



24-HOUR ELECTRIC **WORLD CLOCK**

- 8" Overall diameter
- Adjustable for Various Time Zones
- South Polar Projection

Self starting, accurate electric clock. Tells world-wide and local time. Cali-brated in hours—1 to 24, minutes and seconds—1 to 60. Black dial with white graduations. Chrome plated case. U.L. approved. 110-120 V. 60 cyc. AC. Shpg. vt. 1½ ibs. 13 D 2602

Not 7.66



TIMED EXTENSION CORD

A 3-way combination for every home —an automatic time switch, extension cord, convenient outlet. 0-4 hour time cycle. Easy to operate—plug it into any wall outlet, connect one, two or three devices to be controlled, and turn the knob to the time period desired. At the end of this time period, the electricity is turned off automathe electricity is turned tically. 6-foot cord. Shpg. wt., 1 ib. Net 5.21



WRIST ALARM

- Dependable 17-Jewel Swiss Movement
- Water and Shock-Resistant

Elegantly styled wrist alarm has a 17-jewel Swiss movement in a water and shock-resistant case. Features a radium dial and hands with raised gilt figures; sweep sectors hand, sequine leather strangular unbreakable mairspring, anti-mag.

ond hand; genuine leather strap; unbreakable mairspring; anti-magnetic. Top crown controls alarm, imported. Shpg. vt., 8 oz. 13 D 3114L Stainless Steel Case

13 0 3115L Gold Tone Case

DOUBLE-BUTTON CHRONOGRAPH WATCH

- Accurate 17-Jewel Swiss Movement
- Features Tachometer 4 and Telemeter

17-jewel movement with unbreakable main-spring. Features tachometer to measure speed and telemeter to measure distance of sound. Radium dial and hands: raised gill figures; anti-magnetic; genuine leather strap; sweep second hand. Shock and water-resistant case with chrome stainless steel

ideal for sports, science, etc. Imported. Shpg. wt., 1 lb. 13 D 31131 Net 29.95

PEDOMETER

- Range 0-25 Miles
- Ideal for Hikers. Salesmen, Efficiency Experts, etc.

Fine quality pedometer accurately registers distance you have walked in quarter mile increments from 0 to 25 miles. Large easy to read dial. This precision instrument comes read dial. This procession instrument comes with clip for wearing on belt. Easily set, sim-ple to use. A must for those who want to know their distance traveled. Shpg. wt., 8 oz. 13 D 3112L Net 5.48



LAFAYETTE* TECHNI-TIMERT.M.

- Makes Any Appliance Completely **Automatic**
- No Special Wiring— Just Plug In
- Handles Loads Up To 1875 Watts
- Turns Lights And Appliances On and Off
- 1 Year Guarantee



The Lafayette Techni-Timer makes practically everything electrical automatic. Turns radios on and off. Does not have to be reset each night. Oefrosts refrigerator, controls roaster, electric blanket, fans, coffee-makers, phonographs, etc. Turns your home lights on and off automatically while you're away. Repeats cycle every 24 hours—no need to reset. Minimum ON time 15 minutes, maximum ON time, 23-hours. Minimum OFF time 1-hour, max. OFF time, 23-hours 45 minutes. Easy-to-read 24-hour dial. Can be controlled manually without automatic reset. Attractive design. For shelf, table or wall mounting, With 6 ft. cord, plug and receptacle for equipment to be controlled. Highest quality—we will repair any defect due to material or workmanship within 1 year without charge. Simply ship timer to Lafayette prepaid. 5Wx4Hx2½-2**D. For 110V 60 cycles AC. Shpg. wt., 2 lbs. UL/CSA approved.

Net ea. 7.85 13 D D140 Net ea. 7.85



PORTABLE TYPEWRITER

• All Steel/With Case

Model 885. Features an 88-character key-4 more characters than most standand typewriters (1, +, =, 1): Red/Black ribbon, stencil position; 1, 1½, and 2-line spacing, and an erasure table. Also includes line-lock mechanism, easy margin setting, inne-look mechanism, easy margin setting, jam release key, synchronized measuring scale, card holder, and a touch selector. Popular pica type. All steel. With case, 64x1442x15". Shop, wt., 15 lbs. Imported. 15 D 1701WX \$5 Monthly Net 42.95

DELUXE PORTABLE TYPEWRITER

. With Automatic Key Set Tab

HOME/OFFICE TYPEWRITER

With Molded Case

• WITH Molded Case Model 900. Deluxe features include jam release key, synchronized measuring scale, card holder, convenient touch adjustment. Variable line spacer, and extra wide paper capacity. Also features an automatic and manual ribbon reverse, line finder, line drawing aperture, paper meter, segment shift and automatic pushbutton tabulator. With case. 88 characters pica type. Size: 164x18x74x*. Imported. Shog. wt. 23 ibs.

1634x18x734". Imported. Shpg. wt., 23 lbs. 15 D 1703WX \$5 Monthly

SMITH-CORONA Typewriter—Adding Machines



CORONET ELECTRIC

Type Easier Electrically! Makes up to 10 clear carbons...repeats dots, dashes, spacing, the letter X, and underlines. Full sized 88 character keyboard features impression control dial and touch selector. Amazing accelerator action gives faster type bar action for a snappier, livelier touch. Packed with such effort saving features as the page gage and quick set margins. Equipped with exclusive forward-glide top deck. Strong steel frame construction. Perfect for every member of the family. Trimline luggage type carrying case. Shpg. wt., 26 lbs., 15 D 4008WX Pica- Tan Net 134.95 D 4008WX Pica-Star Mist Blue Net 134.95 Type Easier Electrically! Makes up to 10

"FIGUREMATIC" PORTABLE **ELECTRIC ADDING MACHINE**

Totals up to \$999,999.99

A fast-figuring electric portable that adds, subtracts and multiples. Full-featured construction with 10 keys, Add-Subtotal. Subtract-Total, and Repeat. "Clear" and digital indicator are combined. Lists 7 columns of figures. Easy to carry—the cord tucks in stylish dust cover snaps on, built-in retractable carrying handle comes out and away it goes. Overall 7x9x13". For 110-115 volts, 60 cycles AC. Shpg. wt., 1042 lbs.

_ Net 66.95 15 D 4007WX \$5 Monthly ... ADDING TAPE for Figurematic 21/2" Wide.

15 D 4006 Net .29 each

DELUXE HEAVY-DUTY ELECTRIC ADDING MACHINE

 Totals Up To 9 Columns 9,999,999.99

Model 890 is precision-engineered to handle adding, subtraction and multiplication prob-lems at home or business. Easy to use key board with non-stip keys for accuracy. Large add bar and zero bar are contoured for natural finger movement. Correction key natural integer movement. Correction key eliminates wrong numerals before you total. Clear perforated tear strip, for visible entries. Easy-feed paper chute for positive, quick loading of tape everytime. Functional design in charcoal gray, mar-proof finish. Shg. wt. 12 lbs. Size: 8 x 12 x 5¾.".

15 D 4005WX ...\$6.50 monthly ... Net 114.95

To Speed Your Mail Order - Please Give Your Zip Code Number



(A) LAFAYETTE VECTØRLOG® SLIDE RULE

For Communications Engineers and Physicists

● Laminated Bamboo Construction ● P, P', and Q Scales For Direct Vector Addition ● Hyperbolic Sine and Tangent Scales Two Sine Scales — One Marked in Degrees. One Marked in Radians ● 5 Log Log Scales Plus a Voltage DB Scale . Complete with Belt Carrying Loop and Leather Case

The Lafayette VECTPRLOG Slide Rule provides a new concept in scientific calculation, incorporating scales and arrangement designed for quick-easy-manipulation. Twenty-seven (27) scales incorporate the many problems encountered in Electrical Engineering and Physics. The unique P, P,' and Q scales allow direct right angle vector addition. No longer are several settings required to obtain right angle vector sums—these scales work in the same manner as the C and D for multiplication. The two Hyperbolic Sine and one Hyperbolic Tangent Scale, the voltage db scale, and the five Log Log scales, provide maximum coverage of these dynamic fields. VECTORscales, provide maximum coverage of these dynamic fields. VECTOR-LOG is the result of extensive tests for ease of manipulation. Several of these features are: C and D scales on both the front and back of the rule: Sine scales in both degrees and radians, removing the necessity of bothersome conversion of units: A problem-tessed location of scales; and adjustment screws to allow variable tension on the slide. Scales include: (FRONT) Tr-1, TR-2, P'. P. Q. ST, S-1, S-0, C, D, LLO1, LLO2, LLO3, LL1'; (REAR) Sh-1, Sh-2, OF, A, B, CI, CF, Th, C, D, LL3, LL2, db. With instruction book, leather carrying case, and belt carrying loop. Imported. Net 16.95

(B) DELUXE LOG LOG DUPLI DECIMAL TRIGONOMETRIC SLIDE RULE 25 Scales with 8 Log Log Scales • Two Color Scales

● 25 Scales with 8 Log Log Scales ● Two Color Scales ● Extended Range Avoids "Going Off Scale" ● Extra P Scale Simplifies Computations 10" log log dupli decimal trigonometric slide rule contains 25 scales including 8 Log Log Scales. Troublesome end-for-end resetting is eliminated by extensions of C and D scales. Twin set of Log scales run from 1.001 to 100,000 and .999 to .00001. enlarging the scale by one scale length each compared with ordinary log slide rules, Extra features include P scale which enables direct "readout" of cosine value. Scales include LLO1, LLO2, LLO3, DF, CF, CIF, CI, C, D, LL3, LL2, LL1, LLO0, L, K, A, B, S, ST, T, C, D, DT, P, and LLO. With instruction book, saddle leather case. Overall length is 14". Imported.

99 D 7055 Shpg. wt., 11/2 lbs. Net 15.95 5" Pocket Version of Above Contains all the scales of above except

99 D 7098 Shpg. wt., 8 oz. TACROGRAPH

99 D 7102 Shpg. wt., 11/2 lbs.



A top quality drawing pen for all lettering and drawing work. Uses both India and A top quality distribution of the constant flow lines. Comes with 3 color coded nibs. Fine (Size 0, Grey nib). Light Medium (Size 1 Yellow nib). Yery Broad (Size 3, Blue nib). Shpg. wt., 8 oz. 15 D 8002 Net 4.49

(C) 10" LOG LOG DUPLI TRIG SLIDE RULE

Specially selected, laminated, non-hygroscopic bamboo. Scales machine engraved on white plastic in permanently accurate calibrations.
Adjusting screws permit varying tension on slide. 21 scales including
C, D and CI on both sides. LLO and LLOO scales refer to B scale. All C, D and Cl on both sides. LLO and LLOO scales refer to B scale. All other scales coordinate and refer to D scale. Scales are L, LLI, DF, CF, CIF, CI, C, D, LL3, LL2, LLO, LLOO, A, B, K, CI, C, D, S, ST and T. Scale characteristics permit multiplication, division, proportion, inverse proportion, reciprocals, cotangents, squares, square roots, cubes, cube roots, logarithms, tangents, sines, PI factor multiplication and division, powers and roots of numbers less than 1, powers and roots of numbers greater than 1, logarithms to base "e." Shpg. wt 11/L lbs. Imports wt., 1½ lbs. imported.

(D) TECHNICAL DRAFTING SET

Center Wheel Adjustment

Professional Quality

Made in W/Germany of Nickel Plated Brass

• Made in w/Germany of wicker related brass.

Contains 61%* self-centering compass, one leg knuckie joint with divider, pencil, pen parts and lengthening bar; 61%* self-centering divider; spring bow divider 41/2", center wheel adjustment with interchangeable needle points; spring bow pencil and spring bow pen, both 41/2" with center wheel adjustment and interchangeable needle point; two 53/4" rulling pens; extra handle for pen and pencil parts; adjustment tool; lead case and leads; and spare parts kit, all in velvet lined snap closing case. Shpg. wt., 11/2 lbs. 99 D 7003

(E) draftette PORTABLE DRAFTING MACHINE

Precision Instrument

ORAFTETTE® 9-B—sketch draft, design, draw diagrams and schematics like a professional. A new ORAFTETTE which gives you all the advantages of a T-square, triangle and protractor in a compact, easy to operate portable drafting machine. Constructed of anodized aluminum, features tubular arms, 360° protractor, one-piece 6" x9" scale calibrated in 16ths-1/g-1/g. Mounted on a lightweight 16" x 21"

drawing board, completely assembled ready to use. Shpg. wt., 4 lbs. 15 0 7401 Net 13.98 DRAFTETTE® 9—same as above, less board. Adjustable clamping device allows the DRAFTETTE to be attached to any board or pad of paper (not over 1/4" thick) without screws, botts, etc. Can be removed and folded like a jack-knife for easy storage in desk or

briefcase, Shpg. wt., 1 lb. 15 D 7405 Net 11.98 AUTOMATIC ELECTRIC PENCIL SHARPENER





Net 6 95

 Fully Automatic Electric Operation

 Clog-Proof Sealed Motor Ball Bearings Never Need Oiling

Ideal for student, artist, draftsman, business firm. Gives a needle sharp point instantly . . even sharpens charcoal and pastel pencils. Automatic indicator lights when pencil is sharpened. Specially tem-pered steel cutters last indefinitely. Non-slip suction cups hold firmly to most any surface,

Sealed motor, with ball bearings, never needs olling. Large, clear receptacle is easily removed for cleaning. Simple and safe for even a child to use. Size: 5x31/4x476". 115V, AC. UL listed, Imported, Shpg. wt., 3 lbs.


.. Net 12.95

15 D 3201

Outstanding LAFAYETTE Hi-Fi Amplifier Kits

LAFAYETTE MODEL KT-630 30-WATT STEREO AMPLIFIER KIT

LAFAYETTE MODEL KT-645 45-WATT STEREO AMPLIFIER KIT



Less Base Made In U.S.A.

- Selector: Aux, Tuner, Phono
- Bass Control

wt., 20 lbs.

- 3 Treble and AC Off Control
 4 Concentric L/R Volume-Balance
 5 Laudness Dn/Off Slide Switch
- FRONT PANEL CONTROLS 6 Right Amplifier Mode Selector Slide Switch
 - 7 Left Amplifier Mode Selector'
 - 8 AC Indicator Light

FRONT PANEL CONTROLS 1 Selector: Aux, Tuner, Phono 2 Concentric L/R Bass 3 Concentric L/R Troble 4 Concentric L/R Volume-

10

- Balance 5 AC Off/Speaker Phase 6 Stereo Phone Jack
- 7 Loudness Switch **8 Right Amplifier Mode** Switch

Made in U.S.A.

9 Left Amplifier Mode Switch 10 AC Indicator Light

Forty-five watts of beautiful stereo for only a few evenings of pleasurable, interesting, and educational kit building! And the KT-645 is so flexible—it offers virtually every control needed in the modern stereo system. Features instant selection of any one of 3 program sources, dual preamps for low level phono inputs—RIAA equalized for flat response, handy front panel Speaker Phase/AC off switch for proper phase selection without disconnecting speaker cables concentric volume control for independent or simultaneous level adjustment of both channels, and front panel stereo headphone jack. Attractive brushed aluminum gold anodized extruded front panel with matching gold knobs. Size: 1436Wx1236DX51/4"H., overall. Less cabinet. Shpg. wt., 24 lbs.

Enjoy exciting, wide-range stereo reproduction anywhere in your home or office. The KT-630 features built-in equalized preampilfiers, DC on the filaments in the preamp stage to minimize hum and noise, and 4 pairs of stereo inputs—magnetic and ceramic cartridge, tuner, and auxiliary. Also, the full 30-watt output may be switched for monaural reproduction to either speaker by means of slide switches on the front panel. An attractively styled brushed aluminum gold anodized extruded front panel with matching gold knobs complements the superior electrical specifications. For 110 to 125 Volts, 50-60 cycles AC; Size 12%WX11%0X5¼"H, overalf, Less cabinet. Shpg. wt. 20 lbs.

Input Jacks: Magnetic phono, Ceramic phono, Auxliary, and Tuner: AC Convenience outlet on rear; Rated Power Dutput: 12½ watts RMS per channel; 15 watts per channel; Sensitivity: Phono (magnetic): 2 mv; Phono (ceramic) 70 mv; Tuner and Aux. 65 volt; Frequency Response; 20-60,000 cps. ± 1.5 db at 1 watt; Harmonic Distortion: 1% at 12½ watts RMS per channel; Hum and Noise: Aux. and Tuner — 72 db below rated output, Phono — 50 db below rated output. Dutput Impedance: 4, 8, 16 ohms; Tube Complement: 2 — ECC83/12AX7, 4—ECL82/6BM8, 1—EZ81/6CA4.

- SPECIFICATIONS

21 0 0930WX \$5 monthly . Brown metal case for KT-630. Shpg. wt., 4 lbs.

Net 3.95

Net 44.95 21 D 0946W - SPECIFICATIONS -

Rated Power Output: HFM 45 watts, 22½ watts per channel; Inputs: Aux, Tuner, Ceramic Phono, Magnetic Phono, and Tape out; Sensi-tivity: Phono (magnetic): 3 mv. for rated output per channel, high level inputs: .4v. for rated output per channel. Frequency Response: 10-25,000 ± ½ db at 1 watt; Harmonic Distortion: Less than .15% at normal listening level at 1 KC; IM Distortion: Less than .15% at normal Moise, high level inputs: 70 db below ated output per channel, Phono — 50 db below rated output per channel; Output Impedance: 8 and 16 ohms; Tube Complement: 4-EL84, 2-7199, 3-12AX7, 2 silicon diodes; Power Requirements: 180 watts, 110-125 V, 50-60 cycle AC.

21 D 0945WX \$5 monthly Brown metal case for KT-645

Net 69.95 Net 4.95

LAFAYETTE MODEL KT-615 15 WATT MONAURAL HI-FI KIT

- Easy-to-Build-All Parts, Wire, Solder, and Instructions
- Inputs for Magnetic or Ceramic Phono, AM/FM Tuner, and **Auxiliary Equipment**
- Attractive Two-Tone Gray Panel with Silver Trim

specifications: Power Output 15 Watts IHFM, 12.5 watts RMS; Frequency Response: 15-60,000 cps ± 2 db at 1 watt (average listening level), 35-25,000 cps ± 2 db at full 15 watt output; Harmonic Distortion: 1.1% at full output; Hum and Noise: Phono —45 db. Aux/Tuner —75 db; Input Sensitivity: Aux/Tuner 5 volt, Mag Phono 1.5 mv, Ceramic 25 mv.; Tubes: 2—ECL82/6BM8, EZ81/6CA4, ECC83/12AX7.



Made in U.S.A.

Shown in Optional Case

KT-615 offers versatility and flexibility. Three separate inputs for a fully integrated hi-fi system. Separate bass and treble controls provide full tonal quality. Push-bull ECL82 output stage for clean, wide response.

noise. 4, 8, and 16 ohm output. Less case listed below. Size 111/2Wx71/20x41/2"H. Shpg. wt., 9 lbs.

MONEY BACK GUARANTEE

MUNEY BAUK GUAKANIEE

Your Lafayette Kit when properly wired must meet our specifications or you may return it for FULL REFUND of the purchase price

ASSURANCE OF COMPONENT QUALITY ONE YEAR PARTS GUARANTEE

All Components in this unit are conservatively engineered to operate well within their performance capabilities. As assurance of this quality, Lafayette will replace any parts, including tubes, which fail to perform properly due to defects of material or workmanship.

LAFAYETTE "EXPLOR-AIR" 4-BAND RECEIVER KIT



Lafayette's sensational shortwave receiver kit is a complete shortwave and standard broadcast set which covers the entire region from 550 kilocycles to 30 megacycles. Four whole bands of fascinating programming. Perfect for language students and shortwave listeners.

Only a regenerative circuit can offer such amazing performance and Only a regenerative circuit can orrer such amazing performance any eyet be so simple to build. Building this fine kit is an absolute pleasure—it's so well designed you can't go wrong. Kit includes all the parts you need, and the detailed step-by-step instruction book with its glant pictorial drawings shows you just how to put them together. One front panel knob does all the bandswitching, immediately the property of the part of the pa diately taking you from band to band. All coils are prewound for

4 Bands for Total Coverage

Covers 10, 15, 20, 40, 80, 160 Meter Amateur Bands

Tunes International Broadcast, Citizens Band, Maritime, Aeronautical and WWV Time Signals

Complete Band Switching from Front Panel

Bandspread Tuning

Built-in 4" Speaker

TUNE IN THE WORLD!




greater accuracy. Complete 4 band coverage of broadcast stations, international broadcast bands, amateur, maritime, and WWV time signals. Big 4" speaker and sensitive circuit with 50C5 output stage and 12AT7 regenerative detector and amplifier stages give you all the volume you want. Phone jack for privacy automatically disconnects speaker. All controls are on the front panel: On-Off Volume, Main Tuning, Band Spread, Bandswitch, Antenna Tuning, and Regeneration. 110 volt 50-60 cycle AC-DC power supply. Size: 10x7x5" 19 0 0905 (Less Cabinet) wt., 5 lbs. Net 22.95

Leatherette covered Wooden Cabinet for above. 1 lb.

Net 2.85

LAFAYETTE KT-92 5-WATT PUSH-PULL AMPLIFIER KIT



Push-Pull Audio Output Stage-Inverse Feedback Circuit

Separate Volume, Bass & Treble Controls AC or DC Operation

Here in kit form is an AC-DC hi-fi amplifier that presents deluxe features despite its amazingly low price. The separate bass and treble controls permit adjustment of both low and high frequency response and balance. Works equally well with both crystal or ceramic cartridges. Tube line-up consists of a 12AX7 amplifier and phase inverter, a pair of 35C5's in push-pull, having a power-packed low-distortion output plus a 35W4 rectifier. The circuit utilizes an inverse feedback loop to reduce the level of hum and distortion. Kit is complete containing all essential parts, tubes and detailed instruction manual showing pictorial and schematic diagrams. Shpg. wt., 4 lbs. wt., 4 lbs. Net 11.95

"THE BIG EAR"

• Big 18" Reflector Disk Concentrates Sound Waves Into Transistor Unit Which Amplifies Them Loud and Clear

Powerful new transistorized listening device. Not just a toy—works on the same principle as the fabulous Missile Tracking Antennas. Pick up sounds too distant for you to hear. Make your own wildlife recordings or carry on long range 2-way communications (using a "Bull Horn"). Ideal for experimenters, etc. Complete with sturdy tripod and stethoscopetype earphones. Uses one 9V Battery (not supplied). Shpg. wt., 5 lbs.

13 D 2510W Net 12.95 99 D 6021 9V Battery for above Net

NOVATRON

A SCIENTIFIC INSTRUMENT FOR THE EXPERIMENTER

- Powerful 110 Volt AC/DC Motor
- Miniature Atom Smasher
- Produces
- 75,000 Volts Absolutely Safe
- Completely Wired (Not A Kit)

A scientific instrument capable of producing 75,000 volts—makes sparks up to 2" long—yet it is absolutely safe because the current is infinitesimal. The science-teacher—science lover-or hobbyist can perform experiments to astound students—friends—family. Makes smoke disappear—defy gravity—turns pro-pellers at a distance—transforms atomic energy into light—makes artificial lightning
—smashes atoms— demonstrates ionic space ship drive—and many other experiments. Includes an experimental kit and illustrated experiment manual. A fine research tool that will give years of beneficial service to the institution or individual who owns one. 110 V. AC or DC. Imported. Assembled-Shpg. wt., 4 lbs.

99 D 900a Net 12.95

ALL-TRANSISTOR BULL HORN Only Made in U.S.A. NOT A KIT COMPLETELY PREASSEMBLED

Weighs only 21/2 lbs.

Range up to 400 feet

For Hunting, Camping, Boating, Sports

A fully transistorized directional megaphone at Lafayette's low price. Lightweight, it car-ries your voice over 100 yards or above noise. Just press the trigger and talk. Features variable volume control and carrying strap. Uses 4-standard "O" cells (not supplied with unit). 11" long. Shpg. wt.. 3 lbs. 44 D 1509 Net 7.95 142-volt D batteries, 4 required. Imported. 99 D 6526 Net ea. .13

Educational Computers and Kits - Engines

GENIAC PORTABLE MEMORY CARD FILE



How to file a card in 25 places simultaneously.

For the busy scientist, engineer, teacher, businessman or student who must keep basic information on file. NOW the Geniac Portinformation on file. NUW the wenter roughle Memory Unit, (PMU), a low cost information retrieval system can conservatively sort 400 cards per minute—using no electrical parts or gadgets. Sorting is by rods. Information is coded into the cards by matching such as around the edge of ing prepunched holes around the edge of the card. No previous knowledge is necessary. Once coded the card is filed at random and will automatically appear during sorts for the various categories. Serves as a useful adjunct to company integrated informa-tion systems. The basic PMU contains a matching hand punch, sorting rods and 200 cards. Shog. wt., 6 lbs.

19 0 3801

Additional Cards, pkg. of 100 19 D 3802

MASTER FILE

Includes same components as above plus filing cabinet and 1200 cards. Shpg. wt., 19 lbs.

19 B 3806 Net 44.95

Filing cabinet only. Shpg. wt., 7 lbs. Net 7.20

ANALOG COMPUTER



- Ideal Introduction to Basic **Elements of Analog** Computers
- Work Over 50 Experiments
- Easy-to-Assemble with Screwdriver and Pliers
- Learn the Way to Sound Scientific Knowledge

Analog Computer Kit offering a basic introduction to computer theory a basic introduction to computer theory—gives accurate answers to practical problems. Perform over 50 experiments—multiplication, division, powers, square roots, rocketry, interest, radio-active decay, light, kinetic energy, etc. Level of accuracy better than 5%. The computer consists of a masonite, solid instrument panel, kits, potentiometers, meter, specially calibrated scales, guide and operating booklet. Easy-to-assemble. 18 n agos Shop wt. 6 lbs. Met 8.85 Net 9.95 19 D 3805 Shog, wt., 6 lbs.

GENIAC® COMPUTER KITS



Over 800 Parts For Schools. For Science Fairs, For **Advanced Experimenters**

> Computes, Reasons, **Plays Games**

Composes Music. Forecasts Weather

Design Your Own Computers

DOUBLE GENIAC

The newest kit in famous Geniac® series: The "Double" Geniac contains over 800 parts, two of everything in the Standard model. Offers the advanced experimenter a far wider range of activities. Perfect for school demonstration. Multiple setup is ideal for Science Fair projects—submit one or more designs. Build "electric brains" that test intelligence-code and decode-add,

STANDARD GENIAC

You build up to 125 exciting "electric brain" machines. Has special circuits for forecasting weather. No soldering required. Comes complete with extra pamphlets including 64-page "Simple Electronic Brains and How To subtract, multiply and divide-solve puzzles subtract, multiply and divide—solve puzzies,
—play games—foreast weather—reason in
syllogisms—information and logic circuits.
No soldering required. Easily assembled and
operated. 64 page guide and reference book,
beginners manual, wiring diagrams and many extra pamphiets outlining projects and methods. Complete with mounting rack and batteries. Shog. wt., 12 lbs. 19 D 3803 Net 15.95

Make Them," "Symbolic Analysis of Relay and Switching Circuits," "Beginner's Man-ual, "Machine to Compose Music," wiring diagrams, etc. Complete with battery. 161/2x 1134". Shog. wt., 6 lbs.

MAGIC-GLO BLACK LIGHT

TEKNIKIT •



- Learn Invisible Detection
- Write Secret MessagesEducational—Scientific
- Enjoyable—Interesting

The Black Light Kit enables you to see the invisible. Guaranteed completely safe and harmless. This kit allows children to study the phenomena of fluorescence and phosphorthe phenomena of hubrescence and phosphorescence. Set contains black light, socket and cord, laboratory lamp stand, 4 jars of fluorescent paint, invisible ink, invisible crayon, tracer powder, 3 fluorescent mineral specimens, phosphoragram, optical bleach, brushes and pen, and a box of fluorescent specimens. Enables the student to perform endless numbers of fascinating experiments. The amply illustrated 48 page booklet "The Story of Black Light—The Unseen World Around Us," explains the use of black light in fields such as mineralogy, electronics, crime detection, medicine, stamp collecting, and many others. Shpg. wt., 4 lbs.

19 0 1301 19 0 1302 Replacement U.V. Bulb for above

LAFAYETTE PRECISION-LAPPED R/C ENGINES

 Precision Lapped For Peak Performance

 Excellent Starting Running and Idling Characteristics

MODEL 55RC

OTHER MODELS



Net 11.95

Net 2.70

Sturdily constructed engines specifically designed for R/C use. Throttle precision engineered for smooth, steady power from idle to maximum rpm. Plated piston for long engine-life and quick break-in. Machined connecting rod, balanced crankshaft for vibration-free smooth running. Complete with glow plug, needle valve and instructions. Imported.

Imported. Medel 55RC a reliable engine to power the large R/C craft. Double ball bearing. ¼" dia. crankshaft. Coupled exhaust and intake throttle. Throttle take-off on either side. Bore .932; Stroke .826; Displacement .564;

Compression 8:1; wt. 12 oz. Compression 8:1; wt. 12 oz.
99 B 9115 Shpg. wt. 1½ ibs. Net 29.95
M0DEL 45RC, Same as Model 55RC with Bore
.849; Stroke .827; Displacement .469; Compression 8:1; wt., 12½ oz.
99 B 9110 Shpg. wt., 1½ ibs. Net 24.85
M0DEL 15RC, Bore .594; Stroke .547; Displacement .151; Compression 7:1; wt., 4½
oz. ½" dia. crankshaft.
99 B 9109 Shpg. wt., 1 lb. Net 1D.95
M0DEL 09RC, Same as Model 15PC with Bore
50; Stroke .484; Displacement .096; wt. .50; Stroke .484; Displacement .096; wt.,

Make Lafayette Your One Dependable Source for Everything in Electronics

31/4 oz. 99 0 9108 Shpg wt., 1 lb.

LAFAYETTE & Citizen - Ship R/C Equipment

LAFAYETTE SOLID STATE R/C TONE TRANSMITTER

Only



Three transistor crystal controlled audio tone transmitter operates on 27 megacycles with single 9 volt battery. Features 11-section collapsible center loaded antenna and variable output tuning. Builtin meter monitors battery current. Microswitch transmitting key actuates 100% modulated 550 cycle tone with 3/2 mile range when used with 99 0 9106 R/C receiver shown below. Black anodized aluminum case, 51/2x33/xx13/x". Imported. Shpg. wt., 2 lbs.

99 D 9105 Net 22.50 99 D 6021 9 Volt Battery21 Net

99 B 6258 11/2 Volt Battery (6 required) Net ea. .09

SUPER-REGENERATIVE R/C RECEIVER



Operated with other units or as a companion to the 99 0 9105 transmitter above this 4 transistor receiver audio tones between 400 and mitter above mis a transitor receiver about others between 400 and 1000 cycles. Sensitive relay allows use of all types of escapements or single channel servos. Operates on single 9 volt battery. Lightweight (less than 2 oz.); compact $(1\%_6 \times 2\%_6 \times \%_6)$. Black anodized case with prewired plug. Complete with battery connector, switch, tuning wand and easy-to-follow instructions. Shpg. wt., 1 lb. Imported. Net 14.95 99 0 9106 99 D 6021 9 Volt Battery .

CITIZEN-SHIP ANALOG R/C PROPORTIONAL SYSTEM



 Dual Simultaneous with Trim Controls, Plus Trimmable Motor

Tone Modulated for Noise Rejection 95 No Money Down



Medel APT-S Transmitter—Easy to operate single stick for Right, Left, Up and Down, High output from center loaded antenna. Low battery drain. Size: 234x536x676". Weighs 234 lbs, with batteries. Medal APR Receiver — Extremely sensitive, eliminated dead spots. Size: 134x134x214". Weighs 334 oz.

2 Medel APC Prepertienal Serves — Closed loop feedback servos to be used on control surfaces. All nylon drive train for quiet, efficient operation. Temperature compensated by thermistor. Size:

to be used on control surfaces. All rights drive train for quies, efficient operation. Temperature compensated by thermistor. Size: 29%x19%x1". Weighs 234 oz.

1 Model APM Trimmable Serve — For motor control.

1 Printed Circuit Wiring Board — Complete with switch and 5 plugs and sockets. Interconnects servos, receiver and batteries: System Shpg. wt., 5 lbs.

42 D 1917WX 27.145 Mc; less batteries—\$10 monthly Same as above except with APT Qual Stick transmitter. 42 D 1915WX 27.145 Mc; less batteries—\$10 Monthly 42 D 1915 Model APC Serva BATTERIES REQUIRED Net 199.93 Net 27.95 32 B 4705 For APT or APT-S (1 req.) Net 1.35 32 D 4736 For APR, Nicad battery (4 req.) 32 D 4738 For Servos, Nicad battery (4 req.) Alternate Dry Batteries Net ea. 1.83 Net ea. 99 D 6258 For APR plus Servos (8 req.) .08



CITIZEN-SHIP MODEL TCB CAM ACTION SERVO

- Ideal For Contest Work
- Gives Variable Ratio

For use up to 140°F. Operates directly from any standard reed bank. Features a variable push and pull ratio for slow start, smooth flying and fast finish for quick recovery. Perfect for aileron and elevator Weighs 3 oz. Uses 6 voits (4 penlight cells). Shpg. wt., 1 lb.

42 D 1909 Less Batteries Net 20.75 11/2 Volt Batteries (4 req.)

To Speed Your Mail Order - Please Give Your Zip Code Number

LAFAYETTE SOLID STATE R C TONE TRANSMITTER





Crystal controlled 3 transistor R/C transmitter operates on a single 9 volt battery providing a 100% modulated 550 cycle tone. Perfect for the novice! Only 4¾x2¾x1¾". Contains pushbutton switch, 6-section antenna (3.9" extended) and pre-wired plug. Black aluminum anodized case easily snaps apart for transmitter adjustment. Shpg. wt., 1 lb. Imported.

99 D 9103

99 D 8021 9 Volt Battery

Net 14.95

LAFAYETTE SOLID STATE SUPER-REGENERATIVE R/C RECEIVER



Extremely lightweight, this 27 mc, 4 transistor receiver weighs less tattemely lightweight, this 27 mc, 4 transistor receiver weighs less than 2 oz. yet will receive a 550 cycle tone up to 42 mile using the 99 0 9103 transmitter above. Relay start current is 12 mA, resets at 10 mA. Operates from single 9 volt battery. Housed in black anodized aluminum case with pre-wired plug. 2'1½" antenna required. Supplied with miniature phone jack, slide switch and battery connector. Shpg. wt., 1 lb. imported.

99 D 9104 99 D 6021 9 Volt Battery

Net 14.95 .. Net

CITIZEN-SHIP MODEL RL-6 SIX-CHANNEL TRANSISTORIZED RELAYLESS SUPERHET REED RECEIVER



(27.145MC)

No Money Down

- Companion to SL-6
- Light weight
- Ideal For Class I. II. and Plyon Racing

Especially designed for use with the Citizen-Ship SL-6 transmitter, the combination is ideal for Rudder (class I), Intermediate (class II), and Pylon racing. Receiver operates 3 separate servos (rt., Ift.; up, down; high and low motor). 6 transistors, crystal controlled. Change frequency by changing crystals. High selectivity permits flying up to 5 different models simultaneously without interference. Current drain: 5 MA signal off, 15MA signal on. Weighs only 3½ oz. Size: 27%x13½x1". Less battery. Available in 26.995, 27.045, 27.095, 27.195 and 27.255MC on special order (4 weeks delivery). 1, 2 or 3 TCB or TLB actuators required.
42 D 1905 \$5 monthly

Net 45.75

32 D 4807 9-volt battery for above

CITIZEN-SHIP MODEL SL-6 SIX CHANNEL ALL-TRANSISTORIZED HIGH POWER TONE TRANSMITTER

27.145 mc



62⁵⁰
No Money Down

Operates RL-6 Reed Receiver, and all single channel receivers on these pages. Features F output from silicon transis-tor and center loaded antenna; "contest type" lever switches, 4-transistor temtype" lever switches, 4-transistor temperature—compensated circuit for tone stability. Six adjustable tone frequencies from 350-650 cps. Battery drain 50 MA. Anodized aluminum case with rubber feet. 67%15%12%2". Weight 2% lbs. with battery. Complete with antenna, less battery. Available in 26.995, 27.045, 27.095, 27.195 and 27.255MC on special order (4 weeks delivery).

weeks delivery), 42 D 1901 27.145 mc \$5 Monthly Net 62.50

32 D 4705 9 voit battery for above

Easy To Build Educational Kits

LAFAYETTE 20-IN-1 TRANSISTOR EXPERIMENTERS KIT

Fun To Build - Educational and all 20 projects result in a useful working instrument!

PROJECTS YOU BUILD

95

1. TRANSISTOR TESTER 2. VOICE ACTU-ATED ALARM 3. PHOTO TIMER 4. AUGIO AMPLIFIER S. CRYSTAL SET 6. SOLAR RADIO 7. RAIN ALARM 8. TIMER 9. ONE TRANSISTOR RECEIVER 10. CODE PRAC-TICE OSCILLATOR 11. METROPHONE

12. TWO TRANSISTOR RECEIVER

13. ELECTRONIC RELAY 14. HOME BROAD-

CASTER 15. PHOTO ELECTRIC RELAY 16. BURGLAR ALARM 17. WIRELESS TRANSMITTER 18. REGENERATIVE RECEIVER 19. CITIZENS BAND MONITOR 20. AUDIO OSCILLATOR

Tax Recement to Receive 19. Citizens saw with the second s tion manual contains a wealth of information about each project. Less batteries.

9 D	0902		Net	17
			Net	
12 D	4723	22½ Voit Battery for Kit projects	Net	- 1

SHORTWAVE AND SUPERHET BROADCAST RADIO KIT



2 bands cover both standard broadcast 540-1700 KC and shortwave 5.8-18 MC which includes international broadcast, 40 and 20meter ham bands and some of the aeronau-tical and marine bands. Superheterodyne circuit has high gain IF's, built-in broadcast cercuit has high gain it's, dulif-in broadcast band loop antenna. Comes complete with walnut cabinet, 4" PM speaker, tubes (128E6, 128A6, 12AV6, 50C5, plus 35W4 Rectifier) and all parts. Easy to follow step-by-step instructions. Shortwave band convices actional control of the complete actions. requires external antenna (not supplied). Size 91/4 Wx6Hx51/2"D, For 110V AC or DC. Shpg. wt., 6 lbs.

19 D 4007

Net 17.95

LAFAYETTE WIRELESS BROADCAST/AMPLIFIER KIT

Treat yourself and your family to hours of fun with this Lafayette Kit. Make your own radic programs, announcements, etc., through AM radios anywhere in the house, without wires or extra gadgets. Designed for easy construction by youngsters or adults, it combines in one compact unit a powerful 3-tube wireless broadcaster and an audio amplifier. Clearly written instruction manual makes it a cinch to build. Operates on any frequency between 900 and 1600 kilocycles on your radio dial, it will accept any crystal or magnetic microphone, in addition, it may be used directly as a phono or microphone amplifier. No external preamp is required. Simple slide switch permits either form of operation, Just connect it to a PM speaker (4-16 ohms). Conforms to FCC regulations and is designed to provide high quality voice or record broadcasts. No license or permit is necessary. Complete with crystal clear instruction manual. Less Alike, For 105-125V AC or DC. Attractively styled metal cabinet. Size 4Hx8Wx44%*D. Shpg. wt., 3 lbs.

Same as above, but factory wired and tested,

Net 17.95 19 9 0908 Crystal microphone for above, Desk or hand held. 5 ft. Shpg. wt., 1 lb. Imported.

99 D 4543 Net 1.95 Made in U.S.A.



Use it either as a

MARE IN

Wireless Broadcaster or AM Audio Amplifier!

- Clean, Modern Styling . Powerful Signal
 - Works With All Crystal and Magnetic Mikes and Phono Cartridges
 - Plays Through All AM Radios

LAFAYETTE SUPER-SENSITIVE PHOTOCELL ELECTRONIC

With Sensitive Cadmium Sulphide Photocell

- Adjustable Super Sensitivity-Works With Just A Flashlight At 250 Feet!
- Needs No Special High-Intensity Lights Instantaneous Or Sustained Operation On The Flip Of A Switch!

Ideal for sustained operation required for burglar alarms, door buzzers and for instantaneous on-off operation required

for counters, packaging, door opening, motor activation plus countless industrial applications. Switch converts unit from instantaneous "on-off" to sustained "on" operation. "RESET" switch converts unit from instantaneous "on-off" to sustained "on" operation. "RESET" switch opens the external circuit and turns off the alarm. The unit operates on 110 volts AC and incorporates the efficient 5823 cold cathode tube. A simple change in wiring (in instructions), as well as convenient input terminals, enables you to supply the external circuit with any desired voltage. Relay contacts rated at 3 amps permitting up to 300 watts external load on 110 Volts AC. Complete with all parts, photocell, tube chassis, silkscreened metal cabinet and easy-to-follow illustrated instructions. Size: 3x4x5". Shpg. wt., 3 lbs.





LAFAYETTE LIGHT SOURCE KIT

For Electronic Relay Kit



MADE IN U.S.A.

Used to actuate electronic relay. Unlike units used to actuate electronic relay. Unlike units using sealed beam, this light source is carefully designed to throw a narrow beam of light so relatively small objects and people will "break" the beam. Unit includes adjustable focus and infra-red filter to make beam practically invisible. Range: white light—70', infra-red 45', with instructions. Size-6Lx5Hx4"W. Shpg. wt., 5 lbs.

19 D 0911 To Speed Your Mail Order - Please Give Your Zip Code Number



• Turns Lights and Appliances On and Off From Anywhere In Your Home-By Remote Control!

. Simply Plug In and Operate!

A Lafayette Exclusive!

99 D 9122 Extra Receiver Net 9.95

LLOYD'S 5-WAY LIGHT High Intensity Lamp . High-Low Intensity Switch

NIGHT LIGHT

WALL LAMP

A unique high-intensity lamp efficiently surting a variety of purposes. May be used as a
desk and wall light, night light, spot, and
TV lamp. Features two stylish cylinders with
chrome arm and wall bracket—practical as
well as attractive. Reflector rotates full 180°
mell as attractive. Reflector rotates full 180°
complete with buth Shop with 2 libr.

complete with bulb. Shpg. wt., 2 lbs.

32 D 6684 Replacement Bulb

SPOT LIGHT

Net 12 95 Net .30



nuesa or was mounting. Lamp shade turns in any direction, glying an ample uniform, non-glare beam of light. Sturdy hinged arm extends to 14 inches, folds flat against a hi-impact base. On and off switch plus 6 ft. cord, Gold finish lamp shade and arms: ivory base. Uses #93 buib. 117 volts, 50/60 cycles. Imported. Shpg. wt., 2 lbs. 99 D 9114 ideal for desk or wall mounting. Lamp shade turns in any direction. 32 D 6684 Replacement Bulb

LAFAYETTE ELECTRONIC LIGHT DIMMER CONTROL

Full Range—Total Darkness To Maximum Brightness

Sleek Modern Styling!

Rugged Construction

Easy to use. Dimmer is continuous from off to full illumination. Push on or off at any light level. Operates lamps up to 600 watts 120 VAC only. 12 D 0101



NEW FLUORESCENT DESK LAMP

Imported. Shpg. wt., 9 lbs.

Complete With **Fluorescent**

99 D 9077

An attractive all metal fluorescent lamp with combina-tion solid/gooseneck support finished in chrome. Brown metal base with push button light control . . . perfect for study, office or den. Translucent white plastic dif-fuser for maximum light dispersal. Includes 14-watt, 15" cool fluorescent bulb. Popular streamline design

complements any room decor, 14"H x 15"W. Gooseneck support provides illumination anywhere on your work or reading surface. Imported, Shpg. wt., 4½ bs. 12 0 1602

LAFAYETTE AUTOMATIC 1000 WATT **ILLUMINATOR**

 Turns Lights On and Off **Automatically**

· For Permanent or Mobile Installation

Never Needs Setting

A light-sensitive photo-electric switch that turns your lights on and off automatically at dusk and dawn. Has a capacity of 1000 watts so you can control several fixtures if you desire. Color-coded 6-foot 3-wire cord can be permanently connected to a fixture

or wire it to the plug listed below for mobile or temporary installations. Water-proof construction makes it ideal for outdoor use. Housed in clear plastic case measuring 4x2x2". For 105-130V, 50-60 cps. Imported. Shpg. wt., 1 lb. 99 D 9115 Net 5.95

Plug for adapting Illuminator for Plug-in Use 12 D 5050

Net .35 Lafayette Cat. No. 671

595

Net 5.95

Net 7.99

Make Lafayette Your One Dependable Source for Everything in Electronics





Microscopes ...

For BEGINNERS & INTERMEDIATE STUDENTS



500X "MICRO-MECH" MICROSCOPE

- Built-in Mechanical Stage!
- 100X-200X-300X-500X
- Quadruple Revolving Turret

 6^{95}

For the student—hobbyist—or budding scientist. Featuring a built-in, micro-drive mechanical stage. Permits the micro-movement necessary to properly examine micro objects. Promotes learning through ease of operation. Four achromatic objective lenses giving magnifications of 100%, 200%, 300% and 500%. Complete with wooden carrying case and sides. Imported. Shpg. wt., 4½ bs. 99 D 7188

80X TO 1200X ZOOM MICROSCOPE



- 80X-1200X Magnification
- Variable Zoom Eyepiece
- 3-Way Substage Mirror
- Complete Set of Dissecting Instruments
- 4 Achromatic Objectives Lenses

Constantly variable magnification of 80, 100, 160, 200, 400, 600, 800 and 1200 times. Zoom eyepiece for less specimen adjustment and controlled detail magnification. Excellent dual knob coarse and fine focus control. Stage includes optical condenser and aperture disphram. Spring loaded rack prevents damaging objective. Substage illuminator-mirror combination for direct, incandescent, or reflected illumination. Includes 2 prepared slides, 4 blank slides, spatula, scalpel, probe, scissors, tweezers, and magnifying glass. Wooden case with carrying handle. Illuminator operates on penight cells or house current, by means of a transformer. Less batteries. Imported. Shpg. wt., 6 lbs. fication. Excellent dual knob coarse and

Net 19.95 99 D 7140 Zoom Microscope 99 D 7106 Replacement Bulb Net .11
99 D 8258 Baftery (2 required) Net ea. .99
TRANSFORMER—Permits use of house current for illumination of .11 zoom microscope. Net 1.80 99 D 7110 Shpg. wt., 8 oz.

900X "ZOOM" STUDENT LABORATORY

- Zoom From 100 to 900 Power
- All Dissecting and Mounting Materials
- Prepared and Blank Slides
- Includes AC/DC Substage Illuminator

e Includes AC/DC Substage Illuminator

A complete microscope laboratory for the student and enthusiast.
Provides all necessary material to explore the interesting field of
microscopic research. The 900X microscope offers various combinations of magnification from 100X to 900X with four objective
lenses (10X, 20X, 40X, 60X). Combined with the fine ocular which
"zooms" from 10X to 15X, the scope provides clear, sharp images.
Tube movament governed by adjustable downstop with a locking
screw...prevents costly slide breakage. The 900X features an
optical condenser, plano mirror and built-in 3-voit light using the
AC adapter included, or 2 penlight batteries; Laboratory includes
a dissecting kit with hand lens, blunt-end scissor, scalpeil and
probe; glassware (test tubes, specimen bottles, alcohol burner).
There are several prepared slides, blank slides, cover glasses,
mounting balsam, Methylene Blue and Rhodamine stales. Imported.
Shpg. wt., 7 lbs.
98 8 7195 Microscope kit

Net 22.85

99 D 7106 Replacement bulb 99 D 8258 Battery (2 required)

Net

900X "ZOOM" MICROSCOPE 100X to 900X with Zoom Action Built-in Substage Illuminator

4 Coated Objectives

3 Coated Objectives

Zoom action permits smooth, vibrationfree, variable magnification without disturbing stage or specimen. Four hard
coated objectives set in a revolving
"click stop" turret give magnifications
of 100X, 150X, 200X, 300X, 450X, 600X,
and 900X. Zoom action permits choosing
multiple magnification without changing
eyepiece or objective. Illuminator operates with batteries or house current, by
means of transformer listed helow. Round means of transformer listed below. Round hole disc diaphragm controls illumination, includes instructions, sample slides and wooden carrying case. Less bat-teries, Imported, Shpg. wt., 5 lbs.

99 D 7139 900X Microscope 99 D 7106 Replacement bulb 99 0 8258 Battery (2 required) Net ea. ,09
TRANSFORMER—Permits use of house current for illumination of 99 D 7110 Shpg, wt., 8 oz. ...

Net 13.95

Net



900X "MICROBE HUNTER" • A Microscope featuring

GRADE A optics! Power Range 25X, 50X, 75X, 100X, 150X, 200X, 300X, 400X, 600X, 900X

Full Range Fine Adjustment

Made to rigid design specifications—has wide usage in schools, laboratories has wide usage in schools, laboratories and law enforcement agencies. All of the most needed features for diversified micro-studies. Power range from 25X to 900X in 12 possible combinations, Geared rack and pinion coarse focusing. Micromotion fine focusing—12 complete revolutions. 36mm (plano/concave) mirror. Fixed square stage, 70mm x 80mm. Rotating 5-hole, disc

SPECIAL 20X EYEPIECE

Increases the power of our "Microba Hunter" microscope (above) to 1200X. Highly corrected, fine quality peri-planatic ocular. Imported. Shpg. wt., 5 oz. Imported. 99 D 3471

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down

... Accessories For Microscopes

The "Micro-Standard Mark II" CLINICAL AND

1500X SOCIETY STANDARD MICROSCOPE

• 25X to 1500X in 12 Ranges • 4 Achromatic objectives in rotating turret . Variable substage condenser with iris diaphragm . Standard society optics, both objectives and eyepieces • Rigid quality control standards • Par focal within 0.1mm

An unusually fine optical instrument designed especially for precision viewing requiring high magnification with an oil immersion lens. The outstanding features of great range and engineered versatility, optimum clarity and great magnification are usually found in microscopes costing much more.

DPTICAL SPECIFICATIONS: Three Huygenian eyepieces-5x, 10x, 15x, Four achro-DPTICAL SPECIFICATIONS: Three Huygenian eyepieces—5x, 10x, 15x, Four achromatic objectives—5x, 10x, 40x, 100x (oil immersion). FOCAL LENGTH: 170 mm. Monocular. FOCUSING: Coarse focus with adjustable tension. Fine focus vernier adjustment. Par-Focal within ½r rotation of fine focus control (0.1 mm.). Spring loaded safety device prevents objective going through slide. STAGE: Square stage: 95 mm x 95mm. Integral mechanical stage, adjustable in any direction. Stage clips. SUBSTAGE: Focusing condenser with variable Iris, diaphragm. 41 mm plano/concave mirror. Tilting Base. Black and chrome finish. Overall 12" high, 6½" deep, 4½" wide. Includes fitted wood cabinet with lock and key, 3 slides, bottle of cedar oil. Imported. Shpg. wt., 11½ lbs.

99 0 7134WX \$5 monthly

Net 89.85 99 D 7134WX \$5 monthly

Sample available on approval to universities and industrial laboratories.



ADVANCED ACADEMIC MODEL



 25X to 1200X in 12 Ranges Full Range Fine Focus Adjustment

Integral Mechanical Stage

5A, 10A, 15A, P2DA combine with four achromatic objectives: 5X, 10X, 40X, 60X to yield 12 combinations: 25X, 50X, 75X, 100X, 155X, 200X, 300X, 400X, 600X, 800X, 900X, 1200X. Dual knob rack and pinion coarse focusing with teasion adjustment for slow motion. tension adjustment for slow motion. Micro-motion fine focusing adjustment. Spring loaded to prevent objective from driving through slide. 85mm x 85mm stage can be moved in any direction, with slide, by 2 knurled screws while looking through the eyepiece. Sub-stage has rotating. 5-position diaphragm and 35mm plane (concern reflecting mirror. 35mm plano/concave reflecting mirror, Stable horseshoe base. Complete with set of 5 basic dissecting instruments, 10 slides, pack of cover slips tube of mounting fluid. All in a dovetailed wooden carrying case with handle and four rubber feet. Imported. Shpg. wt.,

99 D 7041 \$5 monthly





Micro-photography!

Astro-photography! Inexpensive—Accurate—Easy to Use

Use Any Camera/Microscope or Camera/Telescope Setup


Photo-record Your Observations.

Permits the use of any camera—even movie cameras—with prac-Permits the use of any camera—even movie cameras—with practically all microscopes and telescopes. No need to remove the camera lens. Cross hairs are super-imposed on the image for centering. The image is automatically in focus for the camera when viewed in focus through the MICRO'DAPTER. Accessory sleeves permit the MICRO'DAPTER to be used with other than Society size microscopes. The MICRO'DAPTER may be used with any telescope by attaching to eyepieces of 29mm (1½2') maximum diameter. Imported, Shpg. wt., 1½ lbs.









A. MICROLITE. Provides a bright, evenly lighted field of view. Adjustable for transparent or opaque specimens, direct or indirect illumination. Invaluable where oblique light is necessary. Operates on 110-120 volts AC/DC. Self contained switch, cord and plug. Lamp is 51/2" long. Stand is 51/2" high. Imported. Shpg. wt., 1 lb.

99 D 7024

B. HUNTING WITH THE MICROSCOPE. HOW the microscope works. How to prepare and study cultures-set up a microscope zoo and garden—grow micro organism—perform micro surgery. Profusely illustrated with photographs and drawings. 10 D 8002

C. NOW TO DISSECT. Exploring with probe, and scalpel, 128 pages, 82 photos and drawings 10 D 0001 Net .99

O. MICRO SLIDE PREPARATION TEKNIKIT. Seven dissecting instruments. 3 well slides, 22 blank slides, 25 cover glasses, 25 blank labels, blue stain, mounting fluid, pins and descriptive booklet. In fitted wooden case. Imported. Shpg. wt., 1½ lbs.

99 D 7098

E. MICRO-POLARIZING KIT. A simple, inexpensive accessory to change any microscope into a polarizing microscope. Consists of an Analyzer and a Polarizer. The Analyzer will fit any microscope eyepiece. The Polarizer can be placed on or under the stage or bethe condenser lens and the The Polarizer is indexed for polarizing axls. Supplied with instructions and case. Imported. Shpg. wt., 6 ozs.

MICRO-SLIDE



Carefully prepared slides of universal interest. Cleaned, dissected, embalmed, stained, mounted and covered. Professional size. Set includes 12 prepared slides and slotted, covered box. Imported. Shpg. wt., 8 oz.

01-6 9 40	Covered Dox. Importou. Suppl. will,	. 04.
Net 3.49	1 37 1 / (IDAL FAILS OF HISECIS N	let 1.39
ple, inex-	99 D 7005 Spiders . N	let 1.39
icroscope	99 D 7006 Tiny Creatures . N	let 1.39
ists of an	99 D 7007 Sea Life N	let 1.39
lyzer will	And B Took Chausting of Diood 6	let 1.15
Polarizer		let 1.39
	An B Total Controls B	let 1.79
ge or be-	BO D 7011 Disables 6	let 1.59
he stage.	An I Base Mills of Complete	let 1.29
	00 0 7049 Miles Overenieme	
case. Im-		let .89
Net .99	*Set of 6 slides	

Lafayette Cat. No. 671

73

For a Complete Selection, See 1967 Lafayette Catalog 670



No Money Down

No Money Down

 454x with **Barlow Lens**

 320x with **Barlow Lens**

EQUATORIAL REFRACTOR

 Eyepieces for 160x, 88x, 40x, Barlow Lens gives 320x, 176x, 80x
 800-mm. focal length o 62-mm objective o Micromotion adjustments on both axes o Coated optics throughout o Equatorial mount ments en beth axes © Casted optics throughout e Equaterial mount Objective: Fraunhofer-type achromat, hard coated, 62.5-mm., 800-mm. focal length. Collects about 75 times as much light as the naked eye, resolving power 2 seconds, faintest discernible star 10.7 magnitude. Eyepieces are hard-coated Huygenians. 160x (5-mm), 88x (9-mm), 40x (20-mm). Barlow Lens Included give ranges of 320x, 176x and 80x. Finder scope is 6x, 30-mm. Tripod head with latitude adjustment. Clamp lever for declination and inclination. Accessories include sunglass, star diagonal, erecting prism, sun projection screen, field tripod, wooden case. Rack-and-pinion focusing. Heavy plating to prevent rusting. Imported. Shgs. wt., 30 lbs. plating to prevent rusting. Imported. Shpg. wt., 30 lbs. Net 79.50

1 395 Quick, Fingertip

Focusing Table-Top Tripod Included

99 0 7032WX \$5 Monthly 99 D 7043L 4-mm, orthoscopic eyeplece for 200x 4 (400x with Barlow Lens)

Net 8.95

8-25X 30mm Z00M

SPOTTING SCOPE

An outstanding varipower spot-ting scope that is ideal for any "'spotting" need in field or general use... shooters, bird watchers, etc. Features 30mm coated lens for brilliant view-ing. Fingertip controls for quick zooming and focusing. Has a built-in camera tripod socket. Includes a table-top tripod with rubber-tipped legs that prevent scratching of furniture. Compact, for taking it everywhere you en

 Any Power from 8X to 25X

 Viewfinder Scope 25x, 42-mm o 910-mm Fecal Length o 76.2-mm Clear Aperture o Micrometion Controls for Declination and Right Ascension o Resolving Power: 1.8 o Barlow Lens Included The objective lens is a 79-mm, hard coated, air spaced Fraunhofer achromat with a clear aperture of 76.2-mm (3"). Focal length 910-mm, 15" Same coated purpless for focal ratio 1/12, resolving power 1.6". Seven coated eyepleces for 227x, 152x, 101x, 73x, 45x, 35x, plus 25x through the viewfinder. Barlow lens doubles all ranges. Focusing by micro-precise rack and pinion drive. The viewfinder scope has a 42-mm objective —500-mm ocal length-rack and pinion focusing—and will accommodate various eyepieces. Finely calibrated hour and declination circles for rapid finding and setting. Body tube of white enameled aluminum. Accessories include three sunglasses, moonglass, two star diagonals, sun diagonal, erecting prism, sun projecting screen, extensible field tripod, chain brace, accessory shelf, wooden cabinet. Via EXPRESS DNIV I morted Sher wit 60 the ONLY. Imported. Shpg. wt., 60 lbs. 99 D 7053WX \$10 Monthly Net 189.00

QUALITY 3" EQUATORIAL REFRACTOR

NEW! LAFAYETTE TELE-CAM ADAPTER

Adapts Most Cameras to Your Reflector or Refractor Telescope For Permanent Records of Your Observations

Shpg. wt. 1 lb Net 6.95

Complete with black, zippered carrying case with convenient belt loop. Overall length of scope is 12". Imported. Shpg. wt. 3 lbs. 99 D 7192 10X30mm TELESCOPE with TRIPOD

lightweight and portable . . . ideal for taking it everywhere you go.



Portable-Compact-Lightweight

A 10 power, 30mm internal (front) focus telescope that is compact, lightweight and portable—ideal for taking it everywhere portable—ideal for taking it everywhere you go. Features coated achromatic lenses. Has built-in camera tripod socket. Sturdy tripod supplied with rubber-tipped legs that prevent scratching, imported,

98 9 7871 Shpg. wt., 2 lbs. Net 6.95 PEN-SCOPE



Net 13.95

Compact 8 Power Telescope

Convenient 30 Power Microscope

The 8 power telescope with adjustable sliding focus barrel that extends to over 8 inches, collapses to 5½" and fits easily in pocket. Barrel slips off to convert to a 30 power microscope. Nickel-plated metal case with pocket clip. Dia. only %6". Shpg. wt., 8 oz. Net 1.98

4X RIFLESCOPE



Hard Coated Lenses

Internal Adjustments

Cross Hair Reticule

Popular, all-around scope for the small game hunter. Bright field, approx. 30 feet at 100 yards. Eye relief distance from 3½ to 4½ inches, Eyeplece diameter, 1" tube diameter ½". Hard coated, achromatic lenses reduce glare. Internal windage and elevation adjustments for positive "zero-in." Fine, cross hair reticule pinpoints target, Featherweight, weather-resistant precision built. Essy fat weather-resistant, precision built, Easy, fast installation with all .22's, with grooved receivers, some air rifles. Imported. Shpg. wt., 1 lb.

Lafevette Cat. No. 671

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down

SALE!!! on LAFAYETTE Binoculars



AS LOW AS 16^{95}

VERSATILE BINOCULARS

All Lenses Are Coated!

 Sealed Against Dust & Moisture Precise design, quality material and expert workmanship. All center focus; adjustable right eye-piece. Leather case, neckstraps included. Imported.

7x35 Popular, versatile, all-purpose binoculars.

99 0 7016 Shpg, wt., 31/2 lbs. Net 19.95 20x50 King of the long range.

20x50 King of the long range. 99 D 7020 Shpg. wt., 4½ lbs. Net .27.95

395

CHARGATRON HOME BATTERY CHARGER

Recharge Batteries
 Up to 15 Times

 Battery Tester Included

• "D"-"C"-"AA" and 9v Transistor Sizes

Recharge from one to four batteries at one time. Safety is assured since charger is in operation only when lid is closed. Plugs into standard 110-120 volt, 69 cycle AC outlet. With free battery tester. Shpg. wt. 2 lbs.

34 0 4202 Net 3.9

CHARGATRON AUTOMATIC BATTERY CHARGER U.L. APPROVED

Fully automatic version of above charger. Safe-T-Plug gives safe low voltage operation and prevents overcharging of batteries. For 110-120V, 60 cycle AC. Shpg. wt. 2 lbs.

34 D 4203 Net 5.95

LAFAYETTE 9-VOLT TRANSISTOR RADIO BATTERY CHARGER AND ELIMINATOR



Just plug into any 117-voit AC receptacle and recharge your old 9-voit battery for many hours of extra use; or operate your set indoors without using the battery at all; or you can both charge battery and operate set at the same time. Has 6-position switch for above functions plus off position and pilot light. Size 4Wx11%,4X 2% "D. Imported. Shpg. wt., 1 lb.



Now 24⁹⁵

EXTRA WIDE-ANGLE BINOCULARS

 Doubles the Field of Ordinary Binoculars

Multi-purpose 7x.35mm binoculars which are especially useful of field studies. Wide angle view allows brilliant and close-up views of sporting events without cutting the image as regular narrow angle binoculars do. Field of view at 1000 yards, is 580 feet! Center focus and right eye adjustment insures perfect focus. All optics are coated, Lined leather case provices protection when not in use. Imported. Snpg. wt., 5 lbs.

99 D 7019 Net 24.95



Now 42^{95}

WIDE ANGLE TRU-ZOOMTM

 Not a "Vari-Power," One Control Zooms Both Barrels!

 Center Focus, Adjustable Right Eyepiece, plus Single Synchronous Zoom Control!

Sight in subject at 7 power—then Zoom up to 12 power (or any four in between) for closeup viewing power. 40 mm objective lenses are hard coated achromats. Field of view is 323 feet at 1000 yards at 12 power (5.5*), Prisms in shock-resistant mounts. Lightweight alloy frame and body, Includes lined hard leather case and straps, Shpg. wt., 5 lbs. Imported.

99 D 7108 ...

\$5 Monthly

Net 42.95

LAFAYETTE "MARINE KING" BOAT COMPASS

 Fully Internal Gimbal Mounting

 Super Heavy Magnet Assembly

Highly accurate professional instrument. Internal gimbal mounting affords maximum protection and stability, and combined with a super heavy magnet assembly, insures accurate, dependable readings regardless of the motion of the boat. Large, easy to read 4" dial with luminous letters is divided into 5" increments and covered by a removable plastic shield to cut down on glare. Compensation controls adjust for changes in magnetic surroundings. Mounting is quick and easy. Durable chrome finish and ultramodern styling makes this an attractive addition to any cockpit. Dimensions: 7½"Hz5¼"D. Imported. Shpg. wt. 3¾ lbs.

99 B 9179 Net 19.95

 19^{95}



EXECUTIVE WEATHER CONSOLE



Thermometer


Barometer

Hygrometer

Early American motif with luster gold bezels, spun gold dials and twin-arrow red points. Rich, red velvet color background, antique white outer case with portico crest and gold eagle. Measures temberature, humidity and air pressure, 11% "Wx5%" "H. Shpg. wt., 3 lbs. Net 10.50

Telephones and Detection Devices

LAFAYETTE TELEPHONE AMPLIFIER



 Several People Can Listen in on Conversation Simultaneously

with batteries

For use with any type of telephone. Amplifies incenting voice and projects it through a 2½" PM speaker. Pickup coil attaches easily to telephone. Separate volume control permits adjustment of volume to desired level. Powered by 4 penlight batteries (supplied). Size: 2½x3x4½". Imported. Shpg. wt., 2 ibs.

98 D 6258 Replacement Penlite Batteries (4 reg.)

... Net ea. .00

DELUXE LAFAYETTE EASY-PHONE TELEPHONE AMPLIFIER



Amplifies Telephone To Room Volume

Battery Operated

The Easy-Phone amplifier is ideal for group conversation with one telephone in the room. Easy to operate: simply place the telephone on the amplifier, adjust the volume and everyone can listen, leaving both hands free for writing or typing. The Easy-phone is a 4-transistor battery powered amplifier and inductive pick-up, in an attractive plastic case. Features:3" speaker, volume control; on/off switch activated by telephone's weight sturdy chrome plated runners. 81/4Lx 315/4Wx2%4"H. Supplied with miniature plug and jack for recorder input. Imported. Shpg. wt., 3 lbs. Net 12.95

99 D 9020 With batteries

99 D 8258 Replacement Penlite Batteries (4 req.)

"PRIVATE EAR" TELEPHONE DETECTOR



• No Wires Connected to Phone

Now a pickup amplifier operating independently or your telephone. No wires connected, nothing put under the receiver, Simply place the unit next to your telephone for clear reception. Operates on its own nattery power. Some practical uses are: an extension receiver, increases reception in noisy areas and for the hard of hearing, for detective use, and listening on extensions without lifting receiver. ideal for all telephones except some push button models. Imported.

Shpg. wt., 8 oz. 99 D 9096 99 D 6021 Extra Battery for above

Net 9.95

"PRIVATE EYE" ONE WAY DOOR VIEWER

- 24-Hour Protection
- One Way Extra Wide-Angle View

Eye' permits identification The "Private Eye" thru-the-door without being observed. Has fine quality genuine optical 'enses. One way viewing only

-you can look out, no one can see in. Provides extra wide-angle wiew—you can see anyone standing or crouching even at the side of the door. Installs quickly with a simple hand drill. "Private Eye" is ½" in diameter, length adjusts to fit any standard door thickness of 1½" to 136" thick, Rust-resistant plastic construction. Cannot be removed from the outside, imported. Shpg, wt. 4 02.

Mat 1 446

Have your own Private Intercom

· For Intercoms. **Private Systems**



Popular modern dial phone. Can be used to make complete private systems. Equipment taken from service, reconditioned and ready to work. Simple 3-wire hook-up. Complete with handset, dial bell, induction coll and connecting cable. General appearance may vary sightly from catalog illustration. Shpg. wt., 8 lbs.

44 B 1801

CLASSIC FRENCH CRADLE PHONE

No Money Down Ideally Blends with Modern and **Traditional**

An exquisite reproduction of the classic French cradle telephone, An exquisite reproduction of the classic french crack telepholic combining the elegance and charm of the fascinating era prior to the turn of the century, Ideal for private phone systems, or intercoms. The warm continental charm blends with modern and traditional decors. Complete with dial, horn mouthpiece, handset, bell and induction coil, Ivory with gold trim, imported Shpg. wt., 10 fbs.

44 B 2801W \$5 Monthly Met 44.95

30 FT. TELEPHONE EXTENSION CORD

 Ideal Extension Cord for Use With Phones Listed on This Page



Add flexibility to your telephone intercom. Now be able to move your telephone intercom from room to room. 30 feet of telephone extension cord with standard 4-pin plug and jack. Color-coded cord to match screw terminals on plug and socket. Imported

THRU-THE-WALL LISTENER



Sensitive Stethoscopic Detector

Attaches to Recorder

Operates on One Penlite Battery

Simply attach to wall by the suction cup and listen through the stethoscopic earphones. Exceedingly sensitive with high amplification, Amplifier has volume control with switch, jack for the earphones and jack for connecting tape recorder. Earpiece may be disconnected from stethoscopic tubes and placed directly in ear. Ideal for detecting intruders or as an electronic babysitter. Uses one penilte battery. Size: Suction cup 4" dia., amplifier 13%" deep. Complete with headset, cord and plug and battery. Shpg. wf 3 lbs. deep. Com wt., 3 lbs. 99 D 9133 Not 12.95

99 B 8258 Replacement battery

To Speed Your Mail Order - Please Give Your Zip Code Number

Top Quality—Proven Performance



FAMOUS SELLING 2-STATION SOLID STATE INTERCOM SYSTEM

Q95

- Inter-Unit Tone Calling
- Beautifully Styled
- Simple Plug-in Connecting Cord
- Push-Button Operation

Solid-state miniature 2-station intercom. Operates from one inexpen-Solid-state miniature 2-station intercom. Operates from one inexpensive 9-voit battery. System consists of one master and one remote with 66 feet of Nghtweight cable. Plug at each end speeds up connection—no tools needed! Master unit has power on/off/volume control and listen-talk switch—you can listen or talk to the master without operating any buttons. Master and remote can call each other even-when master is switched off. Housed in a high impact plastic case with cable and 9-voit battery. Dimensions: 3W x 14H x 4*D. Imported. Shpg. wt., 142 lbs.

4"D. Imported. Shpg. wt., 1½ lbs. 99 D 4578 2-Station Transistorized... 33 D 7702



POPULAR 4-STATION SOLID-STATE INTERCOM

- Instant Communications-No Warm up, Heat or Hum
- 4-Way Selector Switch—3 Remote Stations
- Remote Tone Call
- Battery Powered

Solid state 4-station intercom system combines smart styling, and Solid state 4-station intercom system combines smart styling, and portability with high quality performance. All interstation calling is accomplished with one 4-way selector switch. Push-button listen-call switch on all units. Call signal operates even when master switch is "off". Simple coded interruption of buzzer signal lets master operator know which remote is calling. Cool, efficient solid-state master unit runs on a single, economical 9-volt battery. Master unit has its own volume control with "on-off" switch. Easy, hook-up is facilitated by inclusion of three 60 foot lengths of 2-conductor wire with jacks at each end, just plug in and talk. Additional wire is available at extra cost. See below. Complete set consists of, master control unit. 3-remote units, 9-volt battery and wire. Size: Master: 4½WXJ3/"D; Remotes: 2Wx4"D. Imported Shpg, wt., 2½ ibs.

99 0 4555 Complete 4-station System 99 0 6021 Replacement 9-volt Battery (1 Req.)

Net

32 D 3052 Additional wire, 100 Ft. Coil

Net

SOLID STATE WIRELESS INTERCOM

www.americanradiohistorv.com

- 4 Transistors—No Warm-Up
- Plugs Into Any 117V AC Outlet In Your Home
- Each Unit Is A "Master"—Use As Many As You Need

Additional Intercom Stations

.i Net ea. 14.95



- For 2 Simultaneous but Independent Communications
- Squelch Circuit for noise-free operation

Deluxe compact and fully transistorized 2-channel wireless system. Each unit is a "master"—you can use 2, 3, 4, or as many units as required. Two channels (160 & 200 KC) for maximum flexibility. Ideal when 2 pairs are used — each pair can be used for simultaneous but independent communication using separate channels, or for communication between all units using the same channel. or for communication between all units using the same channel. No wires to connect—just plug each unit in a regular AC outlet. Perfect anywhere in the home or office—can even be used between adjacent homes or buildings on the same electric company power line transformer, Controls: Volume/on-off. Press-to-talk bar with "lock-talk" feature, and channel selector (A-B). Circuit includes Squeich for noise-free operation, 5-translstors, 3 diodes, Ivory high-impact plastic case 5x61/4x3". For 117V, 60 cycles AC, Imported.

99 D 4584 2-Station Intercom System. Net 19.95 99 9 4505 Additional Stations, Shpg. wt., 2 lbs. Net ea. 21.95

DELUXE 2-CHANNEL SOLID STATE WIRELESS INTERCOM



Lafavette Cat. No. 671

Black & Decker **Top Quality Drills**



Medel U-124 Heavy duty capacity 3/8" drill incorporates a double reduction gear that permits a wide range of drilling needs. Perfect for grinding, butfing, mixing and all types of heavy and light drilling chores. Heavy duty UL approved 2.3 amp motor and precision gears combine to give maximum torque at all drilling speeds. "Cycolac" handle provides positive grip at all times. Jacobs geared chuck and key for quick change of bits. Handy trigger switch, with locking button, permits use in awkward places. 3 wire cord plug. Uses 115V AC. Shpg. wt., 5 lbs.

12 D 8850

Net 13.99

2.3 Amp. UL Approved Motor

- Perfect for Home or Shop
- 2250 R.P.M. Motor
- Jacobs Geared Chuck & Key

Model U-100 Just the thing for the hobbyist, home workshop or general use in the home. Ideal for use on wood, metal, masonry. Drilfs, sands, polishes, buffs, grinds, and even mixes paint. Can be used with attachments to make circular saw, jig saw or finishing sander. 1.9 amp. motor has precision oillte bearings for long life. Rugged 2250 rpm motor provides adequate power for most any job, big or small. Sure grip handle eliminates wrist strain. 3 wire cord plug for safe use anywhere. UL approved, operates on 115V AC. Shpg. wt., 4½ lbs. 12 9 6851

VARIABLE MOTOR SPEED CONTROL

850

 Varies Speed on **AC-DC Motors** From 0 RPM To Full Speed • Ideal For Electric

Drills, Saws.

Polishers Dependable motor speed control ideal for workshop power tools using universal AC-DC and series DC motors. Assures constant speed variation from zero rpm to maximum speed. Has built-in circuit breaker. 7.5 amps no-load rating, input: 120 volts 50-60 cycles

AC. 3-wire receptacle and 6' cord. 13 D 2709 Shpg. wt., 1 lb.

REVERSE-A-DRIVE

As Low As


- Increases Torque
- Tapping
- Reversible Screwdriver

The Warren Model W.350 speed reducer can be fitted to any electric drill or drill press quickly and easily. 11 to 1 speed reduction develops high torque for oversize drilling. Ideal for masonry drilling or nut drilling. Easy stop-start action with hand clutch control. Accessories include yankee type—1/4" standard bit—1/4" phillips bit-socket adaptor. Shpg. wt., 1 lb.

Madel W.3001 Heavy duty industrial type. Accessories include yankee type 5/16" standard bit—5/16" phillips bit-socket adaptor. This unit is adaptable for direct drive from any 1/4-3/8" or 1/2" orill. Shpg.

14 D 7901

45 PIECE HOME-POWER WORKSHOP WITH 3/8" DRILL

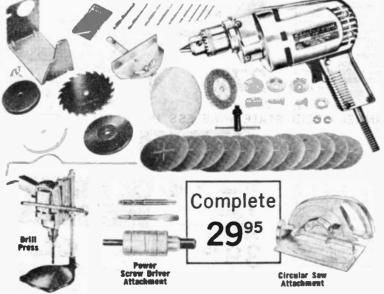

POWERED WITH **GENERAL ELETRIC** 1/3 HP MOTOR

Powerful! Efficient! Flexible! Rugged 3/a" drill with 1/3 hp 3 AMP motor by GE, is capable of performing most any job around workshop and home. Complete assortment of attachments include; circular saw, drill press, power screwdriver, 9 drill bits, 41/2" saw blade, mitre guide, 12 sanding discs, rubber backing pad, adapter set, bench stand, polishing bonnet, paint stirer, buffing, grinding wheel and wire brush. Use this powerful tool to grind knives, tools, pollsh, buff, drill wood, metal, plastics, drive screws, phillips or slotted. Heavy duty multiple ball-thrust bearings for long life. Dynamically balanced motor makes for smoother operation with a minimum of vibration and insures cool and quiet running. Jacobs geared chuck accepts

Heavy Duty 3/8" Drill Only 14 D 4810 Shog, wt., 5 lbs, Net 17.85

Lafayette Cat. No. 871

Make Lafayette Your One Dependable Source for Everything in Electronics

SKIL Reversing Drive-R-Drills

WITH TRIGGER SPEED CONTROL

Operates Both Forward and Reverse By Trigger Finger Pressure

1/2" DRIVE-R-DRILL MODEL 59 8 Heavy-duty-deluxe 3 amp 0-750

ppm forward/reverse, no load speed, Heavy-duty double -reduction gears multithrust bearings.Capacity:½" in steel. 114" in wood, remov able handle. Shpg. wt., 4½ tbs.

13 D 6029 \$5 monthly

Burnout Protected Motor . Drives-Drills, Plus

Unique, all-purpose drills which can tackie most any drilling job with precision and accuracy. Just squeeze the trigger for any drilling speed from 0 to maximum rpm plus reverse speed! Using a driver bit or socket you can drive or remove screws and nuts quickly and easily without accessories. Taps holes in metal too! Has powerful burnout protected motor, high torque helical gears and geared key chuck. Locking button for sustained operation. Lightweight aluminum housing. With 6 ft. 3-wire cord and plug. for 115 v., 60 cycles AC. U.L. listed. Less Bit.

34" DRIVE-R-DRILL

MODEL 597 drill has extra capacity chuck; 0-1000 rpm, forward/reverse 3-amp motor.
Double reduction gears. Capacity: %" in steel, %" in wood. Removable handle. Shpg. wt., 4½ bs.

13 B 6828 Net 31.88

As Low As

EXCLUSIVE TRIGGER SPEED CONTROL 0-Max. RPM Forward 0-Max. RPM Reverse

1/4" DRIVE-R-DRILL

MODEL 596 rated at 2.5 amps, 0-2000 rpm Forward/Reverse. Capacity 1/4" in steel, 1/2" in wood. Shpg. wt., 4 lbs.

Net 24.88

SPRAVIT 600-6 PROFESSIONAL-TYPE SPRAY UNIT



Integral Compressor-Motor

 Sprays Oils, Paints, Stains, Insecticides, Liquid Wax

All-purpose spray unit that gives professional results from the start. Provides uniform adjustable pattern from "dime" size to a fan 10" wide. Precision made with sealed ball bearings, never needs oiling. Easy-to-use 2-finger trigger gun, Air delivery: 1.5-2 CFM at 15-20 lbs. Complete with 6 ft, cord and plug, 8-ft, air hose, spray gun and Viscosimeter which takes the guess-work out of mixing for best spray results, for 115 v, 60 cycles AC. Shpg. wt., 11 lbs.

Net 28-95

MULTI-COLOR KITS: For best results in spraying multi-color paints.
14 D 8402
AIR TOOLS KIT: For inflation and dusting, includes chuck for all tires-footballs, basketballs, toys, air mattresses "dusting" attachment.
14 D 8403 Shpg. wt., 4 oz.
Net 2.18

SKIL 1/4" VARIABLE SPEED DRILL KIT

Complete Kit For The Price of Drill Alone



- Trigger Speed Control
- Speed From 0 to 2,000 RPM
- Complete With Carrying Case

Perfect for virtually all drilling applications requiring precision work. Can be used on plastics, wood, metal, for driving screws, sanding, grinding, polishing or stirring paint. Kit includes: 1/4" *TSC drill equipped with geared chuck and key, 3-prong plug and 2-prong adapter. Kit includes five drill bits, two driver bits, a set of wood augers and a carbide masonry bit. The drill features a "Super Burnout Protected Motor" rated at a full 2.5 amps, and a "variable trigger speed control to obtain the exact drill speed needed for the job. Set comes packed in a durable plastic carrying case for convenient storage, For 115V., AC. Shpg. wt., 4½ lbs.

Net 21.88

UNIVERSAL DRILL PRESS STAND

- Adjustable Depth Stop
- Spring Return Tension
- Adjustable Cradle Adjustable Depth

Gauge Dial Can be used for any 1/4 pistol grip electric drill. Features rack and pinion gear feed, and adjustable depth stage. 15 to 1 lever-

age. Drill press head clamped in rigid position. 244" stroke. Square base is providing with slots for drill bit and for bolting work to base. Other features include spring return tension, fast hand-action, head clamps and adjustable depth gauge dial. Shpg. wt., 6 lbs.



Multiple Speeds from 340 to 2400 RPM

Powerful 6 Amp., 1/2 HP Burnout-Proof

Double Reduction Gears for Super Torque

UL Industrially Rated



Lafayette Cat. No. 671

Selected Power Tools



71/4" BUILDERS' SAW

- 11/2 HP Burnout Protected Motor
- 5200 RPM No Load Speed 10 Amp Motor
- **Industrially Rated Motors**

13 D 6912 Rip Fence Net

DUTY POWER SAW

HEAVY-DUTY SABRE SAW



POWERED WITH G.E. MOTOR

MODEL 909 SOUPED UP" SABRE SAW



MODEL F-7: Combination 7" circular rip and MODEL F-7: Combination 7" circular rip and crosscut saw to zip through minor home repairs, or major jobs. Cuts wall panelling, plaster board and plywood compositions. Adjustable angle: —0' to 45°; maximum depth of cut 2 15/16", 2" at 45°. Features self-lubricating bronze bearing, floating blade guard, safety retractable handle, safety slip clutch and 3-wire cord and plug. Universal 8-ampere, 1½ H.P. motor produces 5,000 RPM for extra power on toughest jobs. Bright mirror finish. For 115V., 60 cps AC/DC. Ut. approved. Shpg. wt., 15 lbs. 13 D 7103 Versatile one tool workshop, capable of handling dozens of cutting jobs, from rough cutting to finished work in wood, metal or plastic. Use as rip, cross-cut, coping or keyhole saw. Powerful, precision, air cooled 3.5 amp motor to handle 6° cuts in wood. Extra large adjustable base enables accurate bevel cuts up to 45° angle. Sawdust blower removes sawdust as you cut. Makes its own starting hole, 4800 strokes per minute. Complete with 5 blade assortment and grounded 3-wire 6-ft. rubber covered cord. For 115V 3-wire 6-ft. rubber covered cord. For 115V., 60 cycles AC/DC. UL and CSA approved. Shpg. wt., 41/4 lbs. 14 D. 4806 Net 19.95

Super-long blade easily cuts through 6x6" lumber. Cuts 4x4" at a 45° angle! Power enough to cut steel plate up to 1/2" thick—iron pipe up to 2" in diameter. Conventional saw grip with auxiliary knob. Saw tilts 45°. Finger control trigger-switch Constart air stream blows dust from line of cut. includes seven blades for cutting wood, steel, hardboard, sheet metal, pipe, leather, rubber, formica, etc. Equipped with rip guide and circle cutter guide. 8 ft. 3 cond. cord and adapter. 110 watts. 6 amp., AC-DC 8Lx7Wx 7½"H. Shpg. wt., 8¼ lbs.
13 D 6501 Net 29.97 Assorted Blades for "909" 13 D 6513 Pkg. of 7


Net 2.38

RAM 2-WAY **ELECTRIC SANDER**



HOR

41/2" BENCH GRINDER





fury SABRE SAW

MODEL F-8: A rugged, multi-purpose sabre saw. Can be used as a rip, crosscut, jig saw. hack saw, band, coping, keyhole and scroil saw. Easily cuts 2x4's, plywood plastic, composition board, aluminum and a host of other materials. Powerful 1/4 H.P. motor with a built-in cooling system, produces 3500 strokes 11/16" long per minute. Also has adjustable bass, rip guide and mitre gauge.

Bevel cuts from 0° to 45°. Positive action, long-life "On/Off" slideswitch. Complete with 3-assorted blades. For 115'., 60 cycles AC/DC. Has mirror finish. Shpg. wt., 4 bs.

MODEL R-120: Heavy-duty and versatile elec-tric sander with 2.4 amp universal series wound, air cooled motor. Sand wood, smooth drywall joints, metal, plastic, or remove old paint. Screw adjustment chooses 3/16" OR BITAL or STRAIGHT stroke, for fast material removal or fine sanding. Pad size: 3%,x7½". Features positive action slide switch, heavy duty ball bearing and self-lubricating sleeve bearings. Also has auxillary knob on front for two handed sanding. Sandpaper size: 3½x9". Industrial mirror finish. 6-ft. UL approved cord. For 115V., 60 cycles AC/DC. Shop. wt. 5 lbs. drywall joints, metal, plastic, or remove old Shpg. wt., 5 lbs. Net 16.95

MODEL 946: Ideal for light to medium-duty work in shop and home. 2.5 amp motor has no-load speed of 3450 rpm. Features heavy-duty steel wheel guards; adjustable tool rests; built-in front water cooling tray; cast in tool parts tray. Two 4½x1/2" wheels (one 40-grlt, one 70-grlt). 6-ft. 3-wire cord. U.L. Industrial rated and CSA approved. For 115V., 60 cvcles AC. Shog. wt. 11 [bs. 60 cycles AC. Shpg. wt., 11 lbs. 13 D 5312

MODEL 928: Heavy-duty grinder for the bigger jobs. 1/4 H.P. shaded-pole motor. Two 6x3/4" grinding wheels (one 46-grit, one 75-grit). 6-ft. 3-wire cord. Shpg. wt., 25 lbs. 13 D 5320WX Net 27.95

Depend on Lafayette for Complete Stocks, Lowest Prices, Fastest Service

Lafayette Cat. No. 671

-UNIMAT Miniature Machine Shop

METAL-MACHINING WORKSHOP

- Precision Metal-Working Lathe
- 11-Speed Ball-Bearing Spindle, Accurate to 1/2 Thousandths
- Converts to Vertical Mill or Drill in Seconds
- Turn, Mill, Bore, Saw, Buff, Sand, Polish, Grind-Steel, Aluminum, Brass, Plastic or Wood

SPECIFICATIONS: Complete 10-in-one machine shop small enough to use on a radio serviceman's bench. Designed as a multi-functional power tool. Converts from horizontal lathe to vertical drill press. The The motor-headstock detaches for use as a portable hand drill, power grinder or buffer. Extra attachments available include a very accurate circular saw, saber and jig saw, flexible shaft, lathe bed power feed, threading attachment, precision collets and cutting tools. Belt drive provides 11 speeds ranging from 900 to 7,200 RPM, Motor can also be controlled by rheostat foot switch or SCR power supply.

Includes 1/10 HP Brush Type fan cooled motor, drill press arm, column and hand lever, face plate, lathe dog, grindstone arbor, tool post, 2 dead centers, 3 jaw universal lathe chuck with reversing jaws, 1/4" Jacobs chuck and key, Allen wrench roughing tool bit, and a spindle return spring. 17½210½x5¾" wood chest, 40-page manual, For 115V AC/DC operation, Imported, Shpg. wt., 30 lbs. 14 B 1001WX \$7.50 Monthly Net 139.50

ONLY 13950 No Money Down

AND ACCESSORIES UNIMAT ATTACHMENTS

Model 08-1290 Power Feed Attach: 1:50 reduction, feeds .0008" per Model 0B-1210 Milling Table: 5" x 3" with clamps. 14 B 1882 Shpg. wt., 3 lbs. Net 10.50 Model DB-1010 Machine Vise: jaws open 11/5". Mounts cross slide or 14 D 1006 Shpg. wt., 7 lbs. mill table.

Model OB-1001A 4-Jaw Independent Chuck; capacity 21/4". Model 0B-1130 Set of 6 Lather Tool Bits.

Net 7.95
Model 0B-1130 Tool Kit: 2 tool bits, 4 drills, 2 grind wheels, 2 milling cutters, center drill and countersink bits, 2 chisels, boxed.

14 B 1004 Shpg. wt., 1½ 1bs.

Model 0B-1100: Set of 6 Lather Tool Bits.

Model OB-1070 Jig Saw Attach, Cuts to center of 16" circle, 12 14 B 1011 Shpg. wt., 61/2 lbs. Net 19.50

2395

BURGESS VIBRO TOOL KIT

Net 9.50

NEW BY AUTOMATIC ELECTRIC

PENCIL



- Writes on Metal, Plastic, Wood
- . No Heat Vibrating Point. Permanently Engraves.

Handy, useful...mark, identify and engrave names, design decorator effects on luggage tags, toys, sporting goods, tools and kitchenware. Automatic with built-in mercury switch. You pick it up—it turns on. Put it down and it turns off. Easy as a pencil. Marks won't erase, smear or rub off. Tough hardened steel point vibrates 7200 strokes a minute. Lightweight. 7x3x2". 110 V, 50-60 cycle Accomptor. Shpg. wt., 5 fbs.

Versatile Multi-Furpose Tool

Heavy-Duty 2-Speed Motor

Complete With 6 Accessories

Performs many operations on nearly any kind of material with its accessories. Features motor control switch plus diel setting for · Grinds, Polishes, Engraves, Sands

- 6 oz. Moto-Tool; Accessories
- 65 Amp Motor, High Speed Steel **Cutters and Wheel Points**

Model 2 Pocket-size machine shop. Oll-less Model 2 Poctet-size machine shop. Oli-less sealed bearing Moto-Tool; hardened ground, polished armature shaft. Collets 1/16", 1/8", 3/32". Fingertip attachment. Four emery wheel points, 8 cutters, dressing stone, steel saw, 4 brushes, 1/2" drum sander, mandrels, sturdy case. For 100-120V, AV/DC. Shpg. wt. 4 lbs. Net 23.95

NEW DREMEL MOTO-TOOL KIT

HIGH QUALITY DROP-FORGED STEEL SOCKET SETS




CHROME PLATED



. CHROME PLATED

21 PIECE 3/8" DRIVE SOCKET SET

Precision quality socket set. Contains: 12 Pt. socket sizes: 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 12 Pt. deep socket sizes: 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", Plus: 3" extension, 9" flex handle, 6" creesber, universal joint, 8" reversible ratchet, branched in heavy gauge red lacquered metal box with handle, 8mported, Shpg. wt., 5 lbs. 13 n. 8586. 13 D 5565



· CHROME PLATED

19 PIECE 1/2" DRIVE SOCKET SET

Quality steel precision secket set, Contains: 12 Pt, socket sizes: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4, 13/16", 7/8", 15/16", 1", 1¼4", 1½", Plus: 5" and 10" extension, 15" flex handle, sliding T-bor, 17" speeder headle, 10" reversible ratchet. Packed in heavy red lacquered metal box with handle. Imported. Sheg, wt., 15 lbs.

13 0 5563 Net 15.98

Lafayette Cat. No. 671

Heavily chrome plated socket set. Contains 6 Pt. socket; \mathcal{H}_4'' , \mathcal{H}_2'' , \mathcal{H}_2'' , \mathcal{H}_4'' , \mathcal{H}_2'' , \mathcal{H}_4'' , \mathcal{H}_2'' , \mathcal{H}_4'' , \mathcal{H}_2'' , \mathcal{H}_3'' , \mathcal{H}_4''

17 PIECE 1/4" DRIVE SOCKET SET

metal box, imported. Shpg, wt., 2 lbs. 13 0 5564 Net 4.48

Depend on Lafayette for Complete Stocks, Lowest Prices, Fastest Service

SALE!

Save 13.00 with accessory kit



Excellent for the Home, Garage, Yard, School or Workshop

CRAFTOOL ALL PURPOSE

• 6 Ft. 21/2" Diameter Hose



13 D 3557

Can be used for rough cleaning nearly anywhere! Excellent for picking up pebbles, wood chips, sawdust and other debris. Also attaches to woodworking machines for chip & sawdust removal. Reversible air flow use it as a blower too! Perfect for winter oil burner cleaning. Complete with 6 ft. 2½" diameter hose & nozzle. UL Approved. Shog. wt., 17 lbs. 5 Gallon unit plus caster set. 3/4 HP. Shpg. wt., 17 lbs.

VACUUM CLEANER

13 D 9027WXM Net 28 95 10 Gallon unit plus 13-3550W accessory kit. Develops 1 HP. 60% more power than 5 gallon unit. Shpg. wt., 25 lbs. 13 D 9028WXM Net 36,90 Caster Sets 13 D 3553 for 5 gal, unit. Shpg. wt., 1 lb. Net 4.29 13 D 3555 for 10 gal, unit. Shpg. wt., 1 lb. Net 4.29 13 D 3551 45" Extension Handle. Shpg. wt., 34½ lbs. Net 3.95 ACCESSORY KIT: Includes 1 14" floor nozzle with brush. 30" extension handle, and adapter which permits use with ordinary vacuum hose and accessories. Shpg. wt., 5½ lbs. 13 D 3550W Net 9,95 Paper Filter Bags (6) for extra dirty jobs . . . slips over permanent cloth bae. Shpg. wt., ½ lb.
13 D 3556 Pk. of 6 Net .89 Net .89 Replacement cloth bag

SLOTTED ERECT ANGLE STEEL UNITS



Machine Stand • Garage • Basement • Office • Workshop

STANDARD DUTY easy to custom build the equipment you need in STANDARD DUTY easy to custom build the equipment you need in steel. Hundreds of uses in the workshop, garage, attle, playroom, basement and office. All you do is measure, cut and bolt together using only a hacksaw and wrench. Made of strong cold-rolled gray-enameted steel. Corner plates provide added structural strength and rigidity—eliminate need for crossbracing. Angles are conveniently marked-off for measuring. 40 ft. outfit consists of 8-5ft. lengths of 1"x1"x.040" angle steel. 12 corner plates and 50 nuts and bolts.

12 D 7706WX Shog. wt. 11 lbs. Net 8.35
HEAVY DUTY ANGLE STEEL 39 ft. outfit consists of six 6½ ft. lengths of 1¼x1¼x.064" plus 50 nuts and bolts, 12 corner plates. Shog. 18 lbs.

12 D 7707WX 12 D 7707WX
Plastic feet accessories for 1"x1" units, pkg. of 4. Shpg. wt., 6 oz.
Net .45 Plastic feet for 14x14" units, pkg. of 4. Shpg. wt., 6 oz. Net .45 12 D 77D9 Extra nuts and bolts, pkg. of 25 12 D 7710 Net .75 Extra corner plates, pkg. of 6 12 D 7711 Net .49

Hirshline DELUXE STEEL SHELVES

· Combines Strength and Beauty Unlimited Arrangements For All

Net 1 39

Storage Needs shelf units ideal for offices, garages, b shelf units local for offices, garages, stores—anyplace where both strength and beauty dictate your storage needs. Elimin-ates unsightly both holes and gives a clean modern appearance. New principle of post and shelf attachment provides extra rigidity and does away with unattractive crisscross bracing. Units have split posts to permit assembly at full or half height in unlimited arrangements to meet every storage and space requirement. Baked enamel in hand-

some charcoal gray. 72"Hx36"W. 13 D 1852WX 12" deep, wt., 30 lbs. Net 9.95 13 D 1851WX 18" deep, wt., 43 lbs. Net 11.95

nettel i lata Andre


STEEL FRAME WORK BENCH

Includes Tool Rack, Peg Board Back Panel and Bottom Shelf

A new all-steel frame work bench that is the ultimate in con-venience and serviceability. The rigid, all steel frame is the core rigid, all steel trame is the core of this complete workshop that will last for years. Features a big 24x48" work top of special, heavy-duty, compressed, high-impact board to withstand the

roughest use. Matching bottom shelf offers handy storage space. Convenient tool rack with peg board back panel. Base on each leg gives extra support and can be bolted down if desired, Easy-to-assemble, 344/2' high. (Tools not included). Shpg. wt., 60 lbs. 13 D 3504WX Net 17.75

POP RIVETOOL KIT



A professional tool which joins virtually anything, metal to metal, plastic to wood, fabric to fabric. Easy to operate, just insert rivet into tool, place in pre-drilled hole and squeeze gun and you have a strong rivet joint. KLIK rivets are strong, neat and permanent. Ideal for Hobbyists, Electronics, Household and Auto repairs. Kit includes Riveter, supply of rivets of various sizes. Extra rivets available at low cost.

13 D 5401 Shpg. wt., 2 lbs.	Net 2.75
13 D 5402 25 Rivets for Work up to 1/8" Thick	Net .44
13 0 5403 20 Rivets for Work up to 1/4" Thick	Net .44
13 D 5404 15 Rivets for Work up to 1/2" Thick	Net .44
13 D 5495 40 Back-up (Reinforcing) Plates	Net .44



MODEL M-10 1/4" & 3/4" TAPEWRITER KIT

- 3 Wheels \(\frac{1}{2}'' \) Giant Letters \(\frac{1}{4}'' \) Characters
- **Vertical Direction Wheel**
- Chrome-Plated with 10 Rolls of Tape and Case

Changes tape size internally, by simple up or down movement of selector pin. Features wide letter spacing, and regular. Rapid change embossing wheels for any application. Complete with custom-fitted carry case, tapewriter, glant letter and standard-letter embossing wheels, 5 magazines of 3/6" tape, 5 magazines of 1/4" vinyl tapes in assorted colors.

14 D 4144 Shpg. wt., 2 ibs.
MDDEL M-10 TAPEWRITER. With 2 wheels; 144" roll of tape.

14 D 4141 Shpg. wt., 1 lb. Net 14.95

NEW! M-6 1/4" And 3/4" TAPEWRITER KIT

- 2-Snap-In Embossing Wheels For Large And Small Characters
- Convenient Tape Cut-Off

Low-Cost tapewriter kit for home, office, store or workshop. Makes raised-letter labels that are self-adhesive, permanent and water-proof. Set dial to letter, number, or symbol and squeeze the handle. When label is completed, squeeze trigger to snip off tape. Kit includes: High-impact plastic embossing tool, two wheels, three 3/6" and two 3/4" rolls of tape plus carrying case. Shpg. wt. 13/2 lbs. 14 D 4148 ... Net 9.88

14 D 4149 Tool Only. Shpg. wt., 1 lb. Net 6.88

E	M	В	0	S	S	1	N	G	T	Α	P	Ε	S

	1/4 INCH	E B 0 0 0 1
Each contains 144" Shpg. wt., ¼ lb.	Net ea., .89 in lots	of three, .75 each
Stock No.	Stock No.	Steck No.
14 D 4102 Blue 14 D 4103 Green 14 D 4104 Red	14 D 41D5 Clear 14 D 4131 Yellow 14 D 4132 Gold	14 D 4106 Brown 14 D 4107 Black 14 D 4130 Orange
70)0000	"EXPERT" SOLDERING	KIT



MDDEL 8200-PK, Just the thing for the novice or professional. Compact design and built-in prefocused spotlight eliminates maneuvering difficulties. Break-proof plastic utility case can be used to hold other parts or tools. Weller Expert Soldering Kit features the 8200 gun with exclusive tip Grip which assures constant heat. Dual heat feature gives choice of 100 or 140 watts with the pull of the trigge.

HEAVY DUTY STAPLE GUN



Drives 5 sizes of staples. Snap dot and tandem springing deliver super power. Loading takes only a moment, builf in extractor. Accepts 1/4" to %6" staples including special loktile staples for firm holding of ceiling tiles. Shpg. wt., 11/2 lbs.

13 D 5812 Net 5.99 Medel 800-X. Same as above with all chrome body. Net 5.75 1000 staples for #800 Swingline staple Gun.

Stock No.	Leg Length	Net	Stock No.	Leg Length	Not
13 D 5813	1/4"	.42	13 D 5816	¥2″	.53
13 D 5814	5/6"	.45	13 D 5817	%₀″	.58
13 D 5815	3/6"	.45	13 D 5818*	%₀″	.64

*Special Loktile Staples

Tools Are Available on Easy Pay Plan-No Money Down

36 INCH Contains 144"

Shpg. wt., 3/4 lb.	Net ea., .99 in l	ots of three, .89 each
Stock No.	Stock No.	Stock No.
14 D 4111 Brown 14 D 4112 Black 14 D 4113 Red	14 D 4114 Clear 14 D 4128 Yellow 14 D 4129 Gold	14 D 4115 Blue 14 D 4116 Green 14 D 4127 Drange

NEW! LAFAYETTE BINOCULAR MAGNIFIER



Ideal for technicians, inspectors and hobbyists. Precision ground and polished lenses for very close work without eyestrain, Headband adjusts to any head size. Lenses can be changed with pushbutton

With complete set of lenses: Range 2X-to-3X. Net 9.95 99 D 7206 Shpg. wt., 9 oz.

LAFAYETTE "ULTRA" ELECTRO-TOOL KIT



- · All the Most Often **Needed Tools**
- Designed with the Technician in Mind




The "ULTRA" kit contains the following: 6½" insulated side cutters, 5" insulated chrome plated diagonals. 6" insulated chrome plated long nose, 30-watt soldering iron. 3 offset open-end wrenches from ½" to ½". 5" chrome plated tweezers, shockproof amberoid chuck handle, ½" screwdriver blade, ½" screwdriver blade, ½" screwdriver blade, #1 recessed screwdriver blade, punch-awl blades, ¼" nut driver blade, solder and flux in a zipopered, fitted, carrying case with handle. 9x5x2", Imported. Shpg. wt., 2½ lbs.

Lafayette Cat. No. 671

AFAYETTE Antennas

Color LVL-UV TV F/M Antennas



ANTENNAS IN **UHF-VHF-FM**

CHANNELS 2-83

- Finest for Color or Black-White Pictures Plus FM
- One Down Lead for All 3 Signals
- Famous Log Periodic Design
- Goldenized Finish For Long Lasting Protection
- High Front-to-Back Ratio High DB Gain
- Twin Brace Boom Supports

New, improved antennas of efficient log periodic design. Now you can easily install one antenna to obtain superb reception on VHF channels 2-13, UHF channels 14-83, and the FM band (88-108 MC) with one down lead. Does the job of three antennas! Ends unsightly roof clutter while providing strong, clear signals to improve the performance of any TV or FM set. Best for Color TV and Stereo FM (multiplex). All antennas are preassembled with dowel reinforced aluminum snap-lock elements and goldenized finish to long lasting protection. Features rugged 1" souare boom. 24 and 28 element models utilize twin brace boom supports for superior rigidity. Supplied with a specially designed 3-way solitter for good isolation with low signal loss. splitter for good isolation with low signal loss.

THE PLANE OF THE PARTY.	AT THE PARTY OF		um Range (r	niles)	Boom	Shpg.	\$0,100,000
Stock No.	Elements	VHF	UHF	FM	Length	Wt. (lbs.)	Net
18 D 0180WX	28	225	100	100	14'	15	34.95
18 D 0181WX	24	175	85	90	11/2"	12	29.95
18 D 0182WX	18	150	80	85	8'4"	9	21.95
18 D 0183WX	12	125	65	75	6'	7	15.95
18 D 0184WX	10	60	30	30	30"	5	9.75

COAXIAL CABLE MATCHING TRANSFORMER KIT

NO EXTRA CHARGE!

Complete with VHF-UHF-FM Splitter/Coupler

Improves Color Reception



Complete kit of matching transformers for installing TV and FM antennas. For use with noise free 72 ohm-coax, cable. Versatile Ubolt mount for outdoor masts-matches any 3º0 ohm antenna to 72 ohm cable, Indoor transformer at set matches the 72 ohm coax. the 300 ohm TV or FM set. Shpg. wt.,

1/2 Ib. 18 D 3889 75 OHM RG-59U LOW-LOSS CABLE WITH CON-**NECTORS**

18 0 5807 50' Shpg. wt., 1½ lbs. 18 0 5808 75' Shpg. wt., 2¼ lbs. 18 0 5808 100' Shpg. wt., 3 lbs. Net 6.49 Net 7.68

ANTENNA INSTALLATION KITS



VHF KIT includes 3-3' galvanized mast sections, 1 lightning arrestor, 2 mast standoffs; 5 screw-in standoffs, 100 ft. 300-ohm twin line, 20 ft. aluminum ground wire. Shpg, wt., 6¾ lbs.

read. Recommended for use with all combination VHF-UHF-FM antenas, Shpg. wt., 7 lbs.

ALLIANCE TENNA-ROTORS




External Hardward

Stainless Steel or Corrosion Resistant Materials Rotation Speed 1 R.P.M.
 Magnetic Brake for Instant Stops with No Drift . Full 360° Rotation

Madel U-100 Rotator unit will handle the largest color TV antennas in winds in excess of 90 MPH. If an individual can lift and install his antenna, this Tenna-Rotor will support it, hold it, and rotate it, Accepts masts to 1-36" 0.0. Guy wire accesses provide secure installation. Control Box fully automatic, just set control knob and antenna rotates to desired position and stops automatically. Indicate the provided of antenna Mac antility metabolicy stops at the tor shows position of antenna. Has positive mechanical stop at the end of rotation. Size: Rotator 744x41/2x8". Control Case 7x44/2x8" 100 V, 60 cps AC at 65 watts. Uses 4 Cond. Cable. Shpg. wt., 12 lbs. 18 D 1403W Net 28.20

4 Conductor flat cable. Shpg. wt., 3 lbs. per 100 ft. 32 0 8910 per 100 ft. 32 D 8811K less than 100 ft.

Net 2.82 Net per ft. .04 Net per ft. .028 **ANTENNA MOUNTS**



18 D 8722W



(A) CHIMNEY MOUNT. An ideal chimney mount for life-long satisfactory service under the most severe conditions. "2" type heavy gauge aluminum brackets. Complete mounting kit of two 12' stainless steel 34" straps and stainless steel seals. Rugged, corrosion resistant mount accommodates masts up to 142" 0.0. Perfect for TV and FM antenna systems. Shpg. wt., 2 lbs. 18 D 6506

(B) PEAK ROOF MOUNT. A heavy gauge steel peak roof mount. Heavily plated to resist corrosion. Will accommodate masts up to 1½% in diameter, Fully adjustable, can be easily rotated. Complete with all necessary hardware. Shpg. wt., 5 lbs. 18 0 6308


(C) 4" STAINLESS STEEL WALL BRACKET, All stainless steel construction for extremely long life. Provides 4" clearance from wall, With special shaped U-bolt to hold masts up to 1½" 0.0. (Set of 2). Shpg. wt., 2 lbs.

18 D 6310 Net 1.55

Depend on Lafayette for Complete Stocks, Lowest Prices, Fastest Service

TV Antennas and Accessories

BLONDER TONGUE BTX-11A UHF CONVERTER/AMPLIFIER O 95



Amplifies Signal 3 Times

Illuminated Dial

for Precise Channel Tuning

Adds all UHF channels (14-83) to your TV set anywhere within the range of a UHF station. Features a new dual speed 100 to 1 fine vernier and illuminated dial for easy tuning; double tuned UHF input circuits and shielded oscillator section for interference-free receptors. tion. AC convenience outlet. Complete with UHF loop antenna. Rugged, reliable patented tuner; spliceless, stripless terminals. For 110-120 volts, 60 cps, AC. Shpg. wt., 2 lbs.

LAFAYETTE TUNABLE UHF ANTENNA

Completely Tunable—Channels 14-83

Solid, Padded Base



A completely tunable UHF antenna. Specifically spaced elements for maximum UHF signal transfer. Bracket with chrome-plated elements slides along graduated scale for precise tuning. Helps clear "ghosts" and eliminates interference. Excellent directivity and stable 300 ohm impedance match. Quick, easy installation. Imported. Shpg. wt., 2 lbs.

LAFAYETTE 7" COLOR TV DEGAUSSING COIL



LAFAYETTE COLOR-AMP TRANSISTORIZED



Gain 20db/Up . Built-in 2-Set Coupler . Uses Low Noise, High Gain Solid-State Circuit . Use With Any Outdoor TV or FM Antenna • AC Isolation Transformer-No Shock Hazard Improve the performance of any new or existing outdoor TV/FM antenna. Efficient solid-state design utilizes reliable silicon transistors for more than 20 db gain across the entire band. Compact, lightweight construction permits mast mounting for maximum transfer of energy. Metal case is weatherproof with built-in lightning-proor energy, metal case is weatherproof with Dulit-In lighthing-protected circuit and high-pass filter which rejects CB and other interference. Separate power supply plugs into any 110-volt house outlet. . . No batteries required. Consumes less power than an electric clock. Handles up to 2 TV or FM receivers. Uses standard 300 ohn twinline, Imported. Shpg. wt., 2 lbs. 99 D 4018

Net 24.95 LAFAYETTE RANGE BOOST™ TRANSISTORIZED TV/FM BOOSTER COLOR Approved 95

INDOOR POWER SUPPLY UNIT Gain 12 db . Built-in 3 Set Coupler . Low Noise, High Gain Transistorized Circuit • Use with Any Outdoor TV Color TV or FM Antenna

Add better performance to your existing outdoor TV/FM antenna. Boost reception for B&W and color TV, plus FM stereo. Solid state design with 1 silicon transistor & 1 diode permitting a gain of better than 12 db on high band, 9 db on low band and 7 db on FM. Compact than 12 do on high band, 9 do on word and any 30 stress styling, lightweight for mounting on mast for greatest transfer of energy. Metal case is weatherproof. Circuit protected against lightning. Separate power supply plugs into any 117 volt outlet. Consumes less power than an electric clock. Economical to use where units are in continuous operation. Uses 300 ohm twinline. May be used for 3 sets. Complete with mounting hardware, instructions. Imported. Shpg. wt., 2 lbs. 99 D 4023

REMBRAND

TV GHOST ELIMINATOR

- Filters Out Interference
- No Installation Problem
- Improves Color Reception
- Receives From All Directions

Electrically rotates the polar-receiving pattern of your existing antenna and phases the ground wave picked up by the electrical wiring system with the sky wave picked up by the antenna. Improves any existing antenna; indoor, outdoor, master or built-in. Boosts pick-up power of any antenna—old or new. Just a flick of the selector control tunes out ghosts—filters out interference—tunes in those "hard-to-get" problem channels. Automatically amplifies TV signal strength for "snow" free, brighter, clearer pictures. Works on every channel—in any location—with any antenna—for any TV set—and plug into 100V AC/DC socket. Complete satisfaction guaranteed or your money back. Shog. wt. 2 lbs.

Shpg. wt., 2 lbs. In lots of 6 ea.

"DELUXE" VHF/UHF INDOOR ANTENNA



MAST

MOUNTED



For Color, Black and White TV



Indoor TV antenna with 46" telescoping arms coupled with adjustable indoor IV antenna with 46" telescoping arms coupled with adjustable radar loops for extra efficient operation in difficult reception areas. 12-position dual control to reject ghosts and orient antenna to direction of strongest signal. Brass tip balls on telescoping arms eliminate signal losses and static discharge interference. Radar loop principle makes possible clearer and sharper pictures on all channels. Matched impedence with separate leads for VHF and UHF. Attractive, durable mastic hase. Shop with 4 the plastic base, Shpg. wt., 4 lbs. 18 D 1207 Mahogany 18 D 1208 Walnut

Net 9.95 85

Lafavette Cat. No. 671

FAYETTE Test Equipment



MADE IN U.S.A.



Tests for Cathode Emission. Leakage and Shorts plus Filament Continuity.



LAFAYETTE SIGNAL GENERATOR AND TRACER

MADE IN U.S.A.

- Two Test Instruments in One
- Built-in Audio Circuit

The Signal Generator serves as a full service instrument—the Signal Tracer follows any signal generated by a broadcasting station or injected by the Signal Generator section. Features 5 frequency ranges and an attenuator switch to control both the R.F. signal and the 400 cycle audio tone. RANGES: 250-850 KG, 850-3000 KG, 3-11 MC, 11-45 MC, 35-120 MC, 400 cps audio signal. Modulation slide switch, and power switch, signal output Jack, AF input Jack, 2 preamp output Jacks, 4½" Alnico V speaker. 3 tubes plus selenium rectifier, and 2 Probes. Dimension: 7½x9½x5¾". Shpg. wt., 9 tbs.

38 D 0102W

Top Quality, Dependable...

LAFAYETTE VTVM with GIANT 61/2" METER

- · Accurately Measures AC Peak-to-Peak Voltage, AC RMS Voltage, and Resistance without Additional Probes or Accessories
- Wideband RMS Measurements on any Waveform from 30 cps to Over 5 MC
- . Direct Reading DB Scale

A high quality, accurate VTVM employing a giant 6½" easy reading 400µA meter. 11 megohm input resistance. AC RMS voltages may be read directly up to 1500 volts and resistance from 0 to 1,000 megohms in 5 overlapping ranges. Has zero-center scale for alignment of FM and TV detector circuits. Push-pull amplifier electrically isolates the meter movement — meter is virtually impossible to burn out. Precision 1% multiplier resistors. SPECIFICATIONS: DC VOLT-METER RANGES: 0 to 3, 30, 150, 300, 1500 volts. Input resistance: 11 megohms (1 megohm in probe) on all ranges. A.C., VOLTMETER RMS RANGES: 0 to 3, 30, 150, 300, 1500 volts. Input resistance: 15, 150, 300, 1500 volts. PEAK-TO-PEAK RANGES: 0 to 8, 80, 400, 800 volts. DECIBEL RANGES: —10 to +5, +6 to +25, +26 to +45 db, Response: 30 cps to above 5 Mc. OHM-METER RANGES: 0 to 1000 megohms in 5 overlapping ranges. ZERC CENTER VOLTMETER RANGES: 0-1.5, 16, 75, 150, 750 volts. Complete with 1½ v battery, instructions, and 3 probes: Common, AC volts/ohms and DC volts probe. Size 7½hx6½wx5°D. For 110-120 v 60 cycle AC. Shpg. wt., 7 lbs.

38 D 0101W

Net 28.95

38 D 0103 Accessory RF Probe 1 lb. 38 D 0106 H.V. Probe, Extends range to 30,000 V. 1 lb. 38 D 1501 Leather Case for VTVM. 1 lb.

LAFAYETTE TUBE TESTER For HOME. SHOP BENCH or LABORATORY

- Checks Compactrons, Nuvistors, T-9 Types 7-pin Miniatures, Octals, Lock-ins and 9-pin Miniatures
- Accurately Checks Over 1800 Different Tubes

A modern, dependable tube checker designed for fast, accurate A modern, dependable tube checker designed for fast, accurate testing—the ideal low-cost tube tester for any radio-TV serviceman, experimenter, technician. Tests most of the tube types employed in Radio, Hi-Fi, Monochrome, and Color TV, including the 12-pin compactrons, nuvistors, T-9s, T, and 9-pin miniatures—actually tests over 1800 different tubes! A special alligator clip lead is furnished to test tubes with top caps. Slide switches connect the varinished to test tubes with top caps. Slide switches connect the various tube elements to their respective test circuits. 3-position tube slide switch for checking shorted elements, cathode emission and filament continuity. A leakage indicator light indicates an interelement short or leakage. Large easy-to-read meter calibrated 0-100 has a red-green "Replace-Good" scale, plus a special scale for checking diodes. A handy slide out metal tray contains tube charts which facilitate rapid selection of test settings. Metal case is attractively finished in cream and steel gray. Completely portable—weighs only 6 lbs. and measures 8½p0x9½wx2½"H. Supplied with carrying case. For 105.125 volts 60 excles 60. Imported Shop carrying case. For 105-125 volts, 60 cycle AC. Imported. Shpg. wt., 7 lbs.

99 D 5063

Net 19.95



LAFAYETTE RF SIGNAL GENERATOR

- Six Bands: 120 Kc to 260 Mc
- **Dual Output RF Terminals**

A stable, wide range signal generator engineered to fill the need for A stable, wide range signal generator engineered to till the need for an accurate low cost service instrument. Full frequency range: 6 Fundamental bands—120-320 KG 320-1000 KC, 1-3.5 MC, 3.2-11 MC, 11-38 MC, 36-130 MC. One harmonic band 120-260 MC. Frequency Accuracy: ±2%, Audio Output: to 8 volts, Large 44%" Etched Circular Dial (Vernier tuned) High-Low RF Output Terminals. Tube Complement: 12BH7A, 6AR5, Selenium Rectifier. Power Requirements: 105-125VAC 50/60 Cps., 12 Watts. Attractive gray wrinkle steel case with leather carrying handle. With test leads. 7Hx101/2Wx5%"D.

99 D 5015 Shpg. wt., 9 lbs. Imported

Test Equipment Is Available on Easy Pay Plan-No Money Down

Service, Low Prices

AYETTE

DELUXE 100.000 OHMS PER VOLT "LAB-TESTER" VOM

Unique Yellow Function Selector Visually Indicates Exact Range

NO MONEY

DOWN

100,000 Ohms Per Volt DC

 Giant Easy-To-Read 6½" Scale · 2% Accuracy on DC; 3% on AC

1/2% Multiplier Resistors

. Built-in Meter Protection on All Ranges

Deluxe laboratory-type volt-ohm milliammeter with performance that Deluxe laboratory-type volt-ohm milliammeter with performance that satisfies virtually any lab or shop requirement. Unique yellow function selector visually indicates exact range being used—thus eliminating chance of error. Completely self-contained, advanced circuitry features ½% precision resistors and 100,000 ohms-per-volt input resistance on DC. Measures voltage in sensitive circuits with precise accuracy. Large, easy-to-read 6½" 2-color meter has a 90° arc for greater legibility and accuracy plus built-in protection against burnout and bent pointers. Provides full coverage with thirty-three ranges for optimum flexibility. Case has carrying strap. Size: 7½WX636HX31½"D. With batteries and test leads. Imported. Size: 71/8Wx63/8Hx31/8"D. With batteries and test leads. Imported. Shpg. wt., 41/2 lbs. 99 D 5065 \$5 Monthly.

38 D 0109 Carrying Case for above

Net 6.95

- SPECIFICATIONS: -

Sensitivity: 100k ohms/volt DC. 5k ohms/volt AC. Ranges: BC 0-5-2.5-10-50-250-500-1000 v. AC 0-3-10-50-250-500 1000 v. DB: -10-100-100 to +49.4 in 4 ranges, DC Current: 0-10-100 a., 0-10-100-500 ma, 0-2.5-10 amps. Resistance: 0-1k-10k-100k-10m-100 megohms. Meter Movement Sensitivity: 9ya for full scale deflection. Output: to 250 v with built-in series capacitator.



LAFAYETTE 20.000 **OHMS-PER-VOLT VOM** with GIANT 6" METER

20,000 Ohms-per-volt DC

1% Multiplier Resistors DC Volts: 0-5000V in 8 Ranges • AC Volts: 0-5000V in 6 Ranges

A precision VOM for accurate measurement of voltage, current, resistance and decibels. Expanded 6" meter scale in red and black. 50-microamp meter sensitivity. Wide-range frequency response measures 10 to 100,000 cycles within ±0.5 db. SPECIFICATIONS. SENSITIVITY: 20,000 ohm/volt DC, 5000 ohms/volt AC. RANGE: AC; 0-5000 volts (in 6 ranges): 2.5, 10, 50, 250, 1000, 5000V; DC; 0-5000 volts (in 8 ranges): 0.25. 1, 2.5, 10, 50, 250, 1000, 5000V; DC Current, 0-10 amps. OHMMETER: 0-20 megohms (in 3 ranges): 0-2K, 200K, 20M. DECIBELS: —20 to +50 db. ACCURACY: DC; ±3% Full Scale. AC; ±4% Full Scale. RESISTANCE: ±3% Full Scale heavy gauge steel case with high impact plastic panel. Includes test leads, batteries and leather carrying handle. Size 6½%Wx7¾Hx3¼°D. Imported. Shpg. wt., 4½ lbs. Net 28.95

99 D 5013

LAFAYETTE 20,000 OHMS PER VOLT MULTITESTER

- 20,000 Ohms/Volt DC, 10,000 Ohms/Volt AC
- 1% Precision Resistors
- Easy-To-Read 3" Meter

 Built-in Overload Protective Circuitry



40 μA, D'Arsonval meter movement permits a high input resistance on all ranges. Rugged high impact plastic case. Ranges (DC Volts): 0-3, 30, 60, 300, 600, 3 000V; AC Volts: 0-6, 60, 120, 1200V. DC Current: 0-60 μ A, 0-12, 0-300 ma. Resistance: 0-60K, 0-6 megohms. Decibels: -30 to +63 db. Audio output jack, With test leads and 1½V battery. Size: 3¼x4½x1". Imported. Shpg. wt., 1 lb.

99 D 5008 Pigskin Carrying Case for above

Net 1.95

LAFAYETTE 30.000 OHMS PER VOLT MULTITESTER

- 30,000 Ohms Per Volt DC. 15,000 Ohms per Volt AC
- 1% Precision Resistors
- Unique "Buzzer" for Fast **Short Tests**
- 27 Meter Ranges

Built-in Overload Protective Circuitry

A deluxe portable VOM with a high order of accuracy. Provides wide A deluxe portable VOM with a high order of accuracy. Provides wide voltage, current, resistance and db ranges clearly visible, on a large 4" meter with 2-color calib-ations. Sensitive 33 microamp meter provides full scale readings down to ¼4 volt on DC and 0.05 milliamps. Ranges: DC volts 0-25, 1, 2.5, 10, 25, 100, 250, 500, 1000: AC volts 0-2.5, 10, 25, 100, 250, 500 to00: DC Current: 0-0.05, 50, 500 ms: 0-12 amps. Ohmmeter: 0-60K, 6 Meg., 60 Meg. Db's: -20 to +56 db. Controls: Range Switch, Ohms Adjust. Audio output jack with DC blocking capacitor. Built-in overload protective circultry. With leads, batteries. 43,8Wx63,6Hx 234°D, Imported. Shpg. Wt. 2 lbs.


38 D 0108 Pigskin Carrying Case for above

LAFAYETTE "SUPER MIDGET" AC-DC VOM

- Pocket Size: Only 21/ax31/ax11/a*
 - 1000 Ohms Per Volt Sensitivity
- Mirror Scale
- Reads: 0-1000V AC-DC 0-100K Ohms, 0-150MA

For trouble-shooting electronic circuits and appliances as irons, lamps, radios, television, hi-fi equipment, 1,000 ohms per volt sensitivity, 1% precision resistors and mirror scale to insure precise readings. Easy to operate, no switching required. Ranges: AC and DC volts: 0-15-150-1000V. Ohms: 0-100,000. Current: 0-150 MA, Plastic covered panel lettering, High impact plastic case. Complete with battery and test leads. Shpg. wt., 10 oz. Imported. 99 D 5064 Net 4.95 99 0 5066 Case for above Shpg. wt., 1/2 lb.





Make Lafayette Your One Dependable Source for Everything in Electronics

Ideal Test Instruments for the Student and Technician

NEW! LAFAYETTE MULTI-LAB 7 IN 1 TESTER



 13^{95}

- Resistance Substitution
- Capacitance Substitution
- IF & RF Signal Generator
- **Audio Generator**
- AC & DC Voltmeter
- RF Field Strength Indicator

Combines seven of the most wanted test Combines seven of the most wanted test functions in one compact easy-to-carry unit. SPECIFICATIONS—Resistance Substitutions: 10001, 1K1, 10K1, 10K1, 10K1, 1M1. Capacitance Substitution: 002 µfd, 005 µfd, 002 µfd 1µPd (600 voit-oil), 10 µfd (350 v. electrolytic). If and RF Generator Frequency: 455KC (variable) Audio Generator Frequency: Approximately 400 cps. AC & DC Voltmeter Ranges: 0-15, 50, 150, 500, (200 µa meter movement). RF Field Strength Freq. Range: 140 mc. With 5 section antenna, test 1-140 mc. With 5 section antenna, test leads, and battery. 61/4x33/4x21/2". Imported. Shpg. wt., 2 lbs. 99 D 5067 Net 13.95

NEW SENCORE CG10 PORTABLE COLOR BAR GENERATOR

- 10 RCA Type Color Patterns, NTSC Phased Colors
- · Compact, Solid State, **Battery Operated**

Less **Batteries**

No Money Down



Portable, easy to use, a mighty midget, yet a giant in performance. All the patterns... a giant in performance. All the patterns...
crosshatch, individual vertical and horizontal
lines, and adjustable white dots at the flick
of a switch. 14 horizontal and 10 vertical
lines, interlace control stops dot bounce.
Uses standard RCA licensed patterns. Quick
warm up time. Solid State design with batteries provides patterns instantly. Rugged

all-steel construction with scuff-resistant vinyl finish. Unusually compact for easy handling on the job, (slightly larger than a cigar box). Low battery replacement time. Uses 8 "C" cells, not supplied. 10x31/4x51/2" Shg. wt., 7 lbs.
38 0 5316 Model CG10 \$5 Monthly Net 89.95

99 D 6257 "C" Batteries (8 reg.) Net ea. .13

NEW! LAFAYETTE TRANSISTORIZED DC POWER SUPPLY

AC Ripple Less Than .025%

Provides continuously variable voltage and current with low ripple. Excellent for opera-tion of transistorized devices. Panel meter tion of transistorized devices. Panel meter reads either current or voltage. SPECIFICA-TIONS—Output voltage: 0-20 volts DC (continuously variable). Output Current: 0-20 MA, 0-200 MA (in two ranges). AC Ripple: less than .025%. Power input: 110-120 volts, 50-60 cps, AC. Fully fused. Size: 64x114x 344. Imported. Shpg. wt., 4 lbs. 99 0 5068 1695

Easy-to-Build Test Equipment Kits

MODEL WV-77EK

VOLTOHMYST KIT

LAFAYETTE TRANSISTOR ANALYZER KIT



Only 13^{50}

ACCURATE 6-IN-1 TESTER

- In-Circuit and Out-Of-Circuit Transistor Checker (Including Power Types)
- Diode and Rectifier Checker
- Signal Generator
- Battery Tester Voltmeter
- Milliammeter

Tests transistors of all types including power types, In-circuit test provides an actual performance check. Externally and transistor is checked for leakage on a transistor is checked for leakage on a multi-colored scale and for beta gain in 3 ranges up to 200. Supplies a 5kc test signal with harmonics for checking the RF. IF and AF circuits. Also checks the condition of diodes and rectifiers. Features a voltmeter for testing transistor radio batteries. This analyzer can check current drain up to 80 ma. Complete with test leads and step-by-step illustrated instructions. Black case and anodized aluminum front panel. 67%157%12%4." Shpg. wt. 3½ lbs. 18 D0901 19 D D901 Net 13.50

Extra 1½ volt Battery (2 req.) 99 D 6257 Net ea.

Fuse in 0hm Circuit Accidental Burnout Famous low cost, high quality VTVM offers you substantial savings when constructed from kit form. Easy to follow instructions. Its 28 ranges include 7 DC voltages: 0-1,5-5-15-50-150-500-1500, ±3% of full scale accuracy and input resistance of 11 megohms:

7rms AC voltages: 0-1.5-5-15-50-150-500-1500, ±5% of full scale accuracy; 7 peakto-peak AC voitages: 0-4-14-40-140-400-1400-4000 volts, 5% accuracy; 7 everlapping ehms ranges from 0.2 ohms to 1000 megohms with center-scale values of 10, 100, 1000, 10K, 100K, 1 meg, and 10 megohms. Other important features include zero center for discrimination ter for discriminator alignment; frequency rer for discriminator alignment; rrequency response of 40 cps to 5 mc. flat to within ±5% on the 1.5 to 15 volt rms and 4 to 40 volt p-to-p ranges: 1% resistors; meter electronically pretected against burnout. For 105-125 v., 50-60 cps AC with DC and AC/ohms probes and cables, battery.

38 D 4602 Shpg. wt., 5½ ibs. Net 38.00

Net 52.00 **DELUXE EICO MODEL 460K** 5" WIDE BAND SCOPE KIT



Prevents

No Money Down

For Color Black & White



DC to 4.5 MC Flat Response TV-V and TV-H Sweeps

Excellent Lab precision scope Push-pull direct coupled vertical featuring coupled vertical amplifier with high sensitivity: 25 my/in, Response flat from DC to 4.5 MC, useful to 10 MC, ideal for reproduction of 3.58 MC color TV sync. burst. 4-step freq-compensated at-tenuator in both AC, DC positions. Also Internal voltage calibration. Automatic sync. limiter and amplifier. 2X-full screen horicontal positioning. Sweep-freq. 10 to 100k cps with external capacitor for lo-freq. sweeps. Preset TV V & H sweep positions (30 and 7875 cps). Variably lit graphed 5" (30 and 7672 cps). Variably in graphics 3 screen. Very hi-input impedance. Complete with all components and instructions for easy assembly. 13x84/2x16". For 105-125 VAC, 50-60 cycles. Shpg. wt., 30 lbs.

38 D 2643WX Kit. \$5 Monthly Net 89.95 Model 460. As above, but factory wired, 38 D 2644WX \$7 monthly ... Net 12

Test Equipment Is Available on Easy Pay Plan-No Money Down

Lafayette Cat. No. 671

MONITOR CALLS FROM:

STATE, COUNTY AND MUNICIPAL PO-LICE - FIRE DEPARTMENT - CIVIL DEFENSE - RAILROADS - TRUCK-HIGHWAY MAINTENANCE ING ---

FORESTRY — AVIATION — CONSERVATION — PETROLEUM AND INDUSTRIAL ACTIVITIES

MODEL HA-520 DUAL BAND FM RECEIVER

TWO RECEIVERS IN ONE! DUAL BAND: 30-50 Mc and 152-174 Mc

ONLY

No Money Down

- Variable Squelch
- Solid State Power Supply
- 10 Tubes
- **Nuvistor RF Amplifier** (152-174 Mc)
- Built-in 4" PM Speaker
- Front Panel Phone Jack
- Illuminated Slide Rule Dial
- **Attractive Green Metal Cabinet**



The HA-520 provides outstanding performance on the 2 VHF FM communication bands with a sensitivity of 3 μV for 20 db quieting. The HA-520 pulls in calls from miles away. Adjustable squelch control silences receiver during periods of no signal — reduces monitoring fatigue. With a squelch circuit the receiver "jumps to life" when POPULAR FM EMERGENCY RADIO

MONITOR CALLS FROM POLICE AND FIRE DEPARTMENTS

Model HA-50A 30-50 MC

Model HA-52A 152-174 MC

• Nuvistor Front End* • 3 IF Stages, Fully Tuned RF Circuit

Two deluxe FM communications receivers for the office, field or home. Excellent sensitivity of 4 µν or leas for 20 db quieting and built-in adjustable squelch for dependable all-day monitoring of emergency, commercial, or industrial communications. Both units feature 3 IF stages and fully tuned RF stage. Model HA-52A incorporates 6CW4 nuvistor "front-end". A built-in 4" speaker gives clear voice reproduction... and as a special feature a front panel phone Jack may be used for private listening. Large, easy-to-read slide rule dial is filluminated for night operation, Housed in attractive human properties. slide rule dial is filluminated for might operation, roused in attractive blue-grey metal cablinet...makes a handsome addition to any home or office. Power requirements: 117 volts AC at 50/60 cps. Size: 11½,x5½x7½*. Imported. Shpg. wt., 14 lbs. *Model HA-52A Only, 99 B 2581WX Model HA-52A 30-50 mc \$5 monthly Net 58.85 99 B 2582WX Model HA-52A 152-174 mc \$5 monthly Net 59.85



40 D 9009WXM

40 D 1302W

Antenna only. Wt., 2 lbs.

No Money Down

MODEL HA-52A PACKAGE

621

Model HA-52A 152-174 Mc. FM emergency radio plus high band ground plane antenna. Shpg. wt., 16 lbs.



MONEY-SAVING RECEIVER-ANTENNA PACKAGES

MODEL HA-520 PACKAGE



Net 99.95 Antenna only. Wt., 6 lbs. Net 19.95 "Range Boost" 40 D 0105WX

MODEL HA-50A PACKAGE



Model HA-50A 30-50 Mc, FM emergency radio plus window and ledge mount an tenna. Shpg. wt., 17 lbs. Net 59.96

40 D 9008WXM Antenna only, Wt., 3 lbs. 40 D 1301W Net 7.35

89

Net 59.96

6.22

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down Lafayette Cat. No. 671



New! Model HA-700 AM/CW/SSB Amateur, SWL Receiver

Only



Sharp selectivity, high sensitivity and exceptional stability keynote Sharp selecting, high semistarity and exceptional seasonity regions the HA-700 general coverage receiver. Continuous filament voltage on critical oscillator/mixer stages maintain frequency stability for faster critical oscillator/mixer stages maintain frequency stability for faster warm-up. Superheterodyne circuitry features two mechanical filters for superior signal selectivity. Sensitive RF stage incorporates antenna trimming controlled from front panel. Assures peak performance on any operating frequency. Silicon diode automatic noise limiter and automatic volume control circuitry provide efficient noise and audio blasting suppression. Built-in BFO and product detection stages permit clear reception of code and sideband signals. Variable BFO tone control aids in reception of CW on crowded ham bands.
Electrical bandspread calibrated at 10 KC per division on 80 meters,
5 KC per division on 40 meters, and 50 KC per division on 10, 15, and

BANO A-150-400KC BANO B-550-1600K -550-1600KC BAND C-1.6MC-4.8MC BAND D-4.8MC-14.5MC 5 BANDS BAND E-10.5MC-30MC

Includes 150-400 KC Weather and Marine

Easy-To-Read Illuminated, Slide Rule Oial

"Always-On" Oscillator/Mixer Filament Silicon Oiode Noise Limiter

Two Mechanical Filters Illuminated Edgewise "S" Meter

6 Tubes Plus Rectifier for 9 Tube Func-

20 meters. Fused transformer and solid state rectifier power supply operates from 105 to 125 volts at 50 to 60 cps. Huge slide rule dial with edge illumination and logging scale permits easy frequency read-out. Tuning dials are flywheel operated for smooth fast tuning. Sensitivity: 1 µv. for 6 db signal to noise ratio, Antenna Impedance. 50-400 ohms. Speaker Impedance: 4 or 8 ohms. Size: 7964HS.15Wx10°10. CONTROLS: Main Tuning. Bandspread Tuning, Function-off/AM/ANL/Send/CW-SSB, AF Gain. BFO Frequency, Band Selector. RF-IF Gain, Antenna Trim, and Meter Adjust (on rear apron), Imported. Shpg. wt., 25 lbs.

98 D 2580WX \$5 monthly

Net 89.95

99 D 2580WX \$5 Monthly

Net 7.95

NEW! 7-TUBE AMATEUR AND SWL RECEIVER MODEL HA-63A



Provides full fingertip coverage of AM broadcast, marine and aeronautical bands, civil defense, WWV, amateur and foreign frequencies. The BFO permits code (CW) reception too, Full electrical bandspread with 0-100 logging scale and built in "S" meter assures you of accurate tuning. Superheterodyne circuit includes RF amplifier and three-section tuning gang condenser with separate tuning coils for each band. Big slide-rule dial is easy-to-read, Other features are switchable AVC/MVC to reduce blasting or fading; automatic noise limiter (ANL) for maximum noise rejection;

4 BANDS:

- 550-1600 Kc
- 1.6-4.8 Mc
- 4.8-14.5 Mc 10.5-31 Mc

Only 59⁹⁵

Electrical Bandspread on the 80, 40, 20, 15, and 10 Meter Bands

- Superhet Circuit with RF Amplifier Stage
 Illuminated "S" Meter
- 3-Section Tuning Capacitor
- Antenna Trimmer for Optimum Performance
 Front Panel AVC-MVC Selector, ANL and BFO
- AC Transformer Operated
 Big Slide Rule Oial

No Money Down

and an antenna trimmer control which assures optimum reception on all bands. All controls are conveniently located on front panel. Headphone conveniently located on front panel. Headphone jack for private listening. Beautifully styled in modern steel cabinet. Tubes: (2) 68A6, (2) 6BE6, (2) 6AV6, (1) 6AR5 plus selenium rectifier. AC transformer operated. 117 volts 50/60 cycles AC. Size: 13Wx7V6Hx10°D. (Less Speaker.) Im-AC. Size: 13Wx7½Hx10°D, ported. Shpg. wt., 19 lbs. 98 D 2564WX \$5 monthly 99 D 2589 Matching Speaker

MODEL HE-48A SPEAKER MATE

Matching 3 x 5 speaker in handsomely styled cab-

inet for HA-700, HA-63, -63A HA-500. Impedance: 8 ohm. Size: 756Hx31/2Wx51/4"D. Im-Shpg. wt., 4

MODEL HA-226 SHORTWAVE COMMUNICATIONS RECEIVER WITH BUILT-IN SPEAKER



No Money Down

- 550-1600 Kc
- 1.6-4.8 Mc
- 4.8-14.5 Mc
- 10.5-30 Mc

Tune in Standard AM Plus World-Wide Shortwave Broadcasts

- Sensitive Superheterodyne Circuit
- Front Panel Headphone Jack
- Built-in 4" Speaker
- Illuminated S-Meter
- Receives Code Signals
- 0-100 Logging Scale
- Easy Tune Slide Rule Oial
- AC Transformer Operated

keeps signal on even keel. Built-in 4-inch speaker provides lots of room filling volume. Low impedance headphone jack for private listening. Speaker automatically disconnects when headphones are used. Handsome light blue all metal case. Size 10¹/_{2.4}Wx6Hx 8²D. For 110-120 volts, 50/60 cycles AC. Imported. Shpg. wt. 12 lbs.

99 D 2520WX \$5 monthly

Ado, 20. 15 and 10 meter amateur bands plus your favorite music and news programs on the standard AM broadcast band. Front panel controls: On/Off Volume. Band Selector, Main Tuning and CW/Phone switch, Illuminated S-meter shows signal strength and correct tuning for best reception. Large slide rule dial face with red dial pointer makes station tuning easy. Has 0-100 logging scale for instant station location. AVC reduces fading and blasting Lafayette Cat. No. 671

Amateur Equipment Is Available on Easy Pay Plan-No Money Down

NEW! Model HA-500 SSB/AM/CW 80 Through 6 Meter Receiver





80 Meters 10 Meters 6 Meters 3.5-4.0 MC 7.0-7.3 MC 14.0-14.35 MC 21.0-21.45 MC 28.0-29.7 MC 50-54 MC

Outstanding new Lafayette Model HA-500 receiver features tuned RF and 1st mixer stages which provide maximum sensitivity and front end selectivity for high signal to noise ratio with superbinage rejection. Dual intermediate frequency circuits feature two ceramic 455 KC mechanical filters for additional wave shaping. Product detector and BFO combine for crisp and clear CW and SSB. OB2 voltage regulator supplies oscillator with regulated B plus voltage for virtually driftless operation. Full time automatic volume control is automatically set to provide standard operation on AM and fast attack-slow decay on CW and SSB. Illuminated slide rule dial is calibrated for easy reading. Accurate built-in 100 KC calibrator assures precise calibration. "Always On" oscillator filament increases stability and reduces warm-up time. Controls: Tuning, Calibration off/on, Automatic Noise Limiter off/on, Antenna Trim, RF Gain, AF Gain (volume control), Bandswitch, BFO Outstanding new Lafayette Model HA-500 receiver features tuned

Amateur Receivers

FOR: NOVICE GENERAL **TECHNICIAN**

10 TUBES, **DUAL CONVERSION**

NO MONEY DOWN

- 10 Tube Superheterodyne Circuit
- Product Detector for CW/SSB-Diode Detector for AM
- Two 455 KC Mechanical Filters for Sharp Selectivity
- Illuminated Calibrated S-Meter
- **Dual Conversion On All Bands**
- Built-In 100 KC Crystal Calibrator
- "Always-On" Oscillator Filament

Frequency, and Function Switch, Sensitivity: less than 1 µv, for 10 db signal to noise ratio on all bands. IF Rejection:—40 db. Image Rejection:—40 db. Audio Output: 1 watt. Intermediate Frequencies: 1st IF 2.608 MC, 2nd IF 455 KC, Output Impedance: 8 and 500 ohms. Tube Complement: 6826 RF Amplifier, 6AU6 1st Mixer, 6AQ8 Local Oscillator, 6BA6 1st IF, 6BA6 2nd IF, 6AQ8 Product Detector and BFO, 6AQ8 AM Noise Limiter and 100 KC Crystal Calibrator, 6BM8 Audio Amplifier, OB2 Voltage Regulator, Power Requirements: 117 VAC (65 watt Power Consumption). Size: 15Wx7½Hx10*0. Shpg. wt., 25 lbs. Net 149.95 Model HE-48A 3x5 inch Speaker Mate for HA-500, 99 D 2574WX S8 Monthly Model HE-48A 3x5 inch Speaker Mate for HA-500. Net 7.95 100Kc Calibrator Crystal for HA-500
40 D 0901L Net 3.95

LAFAYETTE 10-80 Meter SSB/AM/CW Amateur Receiver

5 HAM BANDS PLUS WWV

3.5— 4.0Mc 21.0-21.5Mc 7.0- 7.5Mc 28.0-29.7Mc 14.0—14.5Mc WWV at 15Mc

No Money Down

- Mechanical Filter for Exceptional Selectivity
- 12 Tubes Dual Conversion Automatic Noise Limiter
- Product Detector for Selectable Upper and Lower Sideband Reception
- Complete with Crystals for 80, 40, 20, 15 and 10 Meters
- 100 KC Crystal Calibrator and Crystal BF0
- "S" Meter-Calibrated in "S" Units 1-9 and to +40 db

• "S" Meter—Calibrated in "S" Units 1-9 and to +40 db
Latysette's professional quality communications receiver. Dual
conversion circuitry features an image and IF rejection of more than
40 db. A product detector, providing selectable upper or lower sideband, solves the problems in SSB reception. Tuneable preselector
circuit gives sensitivity of less than 1 microvolt for 10 db signal-tonoise ratio. Selectivity: Bandwidth of 2 KC at 6 db down and 6 KC
at 60 db down using mechanical filter. Front panel 100 KC crystal
calibrator reset control used in conjunction with the 15 MC WWV
station assures accurate calibration. CHECK THESE SPECIFICATIONS!
Audio output: 1-watt maximum, Speaker impedance: 8; 500 ohms
(speaker not supplied). Front panel controls: Preselector; Cal —
On/off: Band Selector; Receive/Send; Tuning Cal Reset; Function —
Off/AM/SSB1-CW/SSB2; RF gain; AF Gain; ANL; Phone jack. Tube



Model HA-350

Model HA-94 Speaker Mate (Optional)

Mechanical Filter

Ultra-sharp selectivity is achieved by means of a true mechanical bandpass filter in the 455 Kc IF section. The filter consists of three sections—an input transducer, 6 non-corrosive nickel alloy resonators and an output transducer. output transducer.



complement: 6BZ6—RF amp.; 6BL8—Xtal controlled 1st mixer; 6BE6—2nd mixer; 6BA6—VFO; 6BA6—IM amp.; 6BA6—IF amp; 6AL5—AVC rectifier and AM noise limiter; 6AQ8—product detector and crystal calibrator; GAV6—1st audio amplifier; GAQ5 audio output; GBA6— BFO; OB2—regulator, Silicon Full Wave rectifier. Size: 15Wx7¹/₂Hx 10⁻D. For 115V 50/60 cps AC. Imported. Shpg. wt., 25 lbs. Less Calibrator Crystal.

99 D 2524WX \$7 Monthly 100KC Calibrator Crystal for HA-350.

91

40 D 0901L MODEL HA-94. Speaker mate for HA-350, 8-inch heavy-duty

ohm speaker in matching cabinet. Size: 71/4 Wx51/40x75/6"H. 12.95 99 D 2571 Shog, wt., 51/2 lbs.

To Speed Your Mail Order - Please Give Your Zip Code Number

Lafayette Cat. No. 671

AFAYETTE 6-Meter Solid-State Transceiver Amateur Gear

OMPLETELY PORTABLE AND MOBILE $oldsymbol{--}$ TAKE IT WITH YOU EVERYWHERE!



No Money Down

2.5 Watts Input Using Built-In Battery Supply

RF Output Efficiency Better Than 50%

6 Crystal-Controlled Transmit **Positions**

Tuneable Superheterodyne Receiver


Optional Power Supply Allows Fixed Station Operation Using 115 VAC

Complete with Leather Carrying Case, Shoulder Strap and Batteries

Great for field days! All solid-state craftsmanship delivers more than 50% efficiency into the antenna. Push-pull modulated 2.5-watts input final assures consistently high modulation level for watts input final assures consistently high modulation level for greater talk power. Oscillator features 6 crystal positions and uses standard 8 mc fundamental crystals. Convenient spotting switch allows zeroing transmit frequency on tuneable 8-stage receiver. Receiver sensitivity 1,2 µv. for 10 db quieting. Built-in series gate noise timiter allows quiet operation. Zener diode power supply circuitry used as voltage regulator in RF and mixer stages. Relay transmit-receive switching actuated by efficient plug-in push-to-talk dynamic microphone. Tunes popular low section of 6 meters (50 to 52 MC). Fixed station operation facilitated by external antenna connector. Supplied complete with leather carrying case, telescopic whip antenna, mobile power cable, shoulder strap, and 10 "D" cells. Dimensions: 115aWx61/2Hx3"D, Less crystal. Shpg. wt., 8 lbs.

99 D 2570WX

Net 119.95

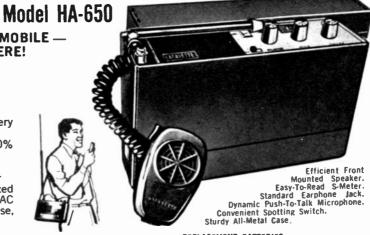

DEDIACEMENT RATTERIES

WEI ENGEMENT DATTERIES	
99 D 6256 "D" Cells (10 req.)	Net ea13
Lots of 10	Net ea125
Heavy Duty Alkaline Battery "D" Size	
32 D 4884	Net ea49
MODEL HB-501 SOLID-STATE AC POWER SUPPLY.	VIIOM2 RZG OI
HA-650 on 117 VAC for convenient fixed station use	. Shpg. wt., 10
lbs.	
99 D 3028W	Net 16.95
8 MC Fundamental Crystal (divide operating freque	ncy by 6). Will
supply to nearest 5 KC.	
40 0 5403C Specify Frequency	Net 2.95
ADAPTER CABLE ASSEMBLY	
4 Ft. RG-58/U cable assembly. Adapts Motorola ty	pe external an-

tenna connector of HA-650 for input to SO-239 jack of external antenna, Linear Amplifier, etc. 40 D 0904

6 and 10 Meter Amateur Transceivers Model HA-460 for 50-52 mc. Model HA-410 for 28-29.7 mc.

COMPLETELY WIRED **BUILT-IN VFO**

only 149^{95} \$8 MONTHLY

- Tuned Nuvistor Front End
- 20 Watts DC Input 2E26 Final
- **Built-in Low Pass Television** Interference Filter
- Dual Conversion with Crystal Controlled 2nd Converter
- Built-in Solid State 12 V.D.C. and 117 V.A.C. Power Supplies



Air Variable Antenna Load Control Air Variable Plate Tuning Control Calibrated VFO Frequency Control Illuminated "S" and RF Output Meter Calibrated Receiver Frequency Control Transmitter Frequency Spotting Switch Front Panel Communications Speaker

Front Panel Standard Earphone Jack Positive Contact PTT Microphone Socket Volume Control Crystal-VFO Operation Mode Selector Front Panel Crystal Socket

Exciting 400 series transceivers feature a powerful plate modulated 20 watt DC input transmitter and stable VFO with its own frequency control knob. Tune up is fast and efficient with driver and multiplier automatically tuning with VFO. Shielded low pass filter minimizes TVI problems, Dual conversion receiver utilizes a crystal controlled 2nd converter. Nuvistor RF amplifier's sensitivity is less than 1 μv , for 10 db signal to noise ratio. Selectivity at 8 KC is 35 db. SCR controlled noise limiter effectively eliminates most types of QRM, Other features include spotting switch, use of standard 7 and 8 mc. Crystals with front panel crystal socket: illuminated meter that reads S units on receive and RELATIVE RF output on transmit; plug-in encapsulated dust free relay switching: front panel earphone jack; push-pull audio amplifier: and rugged front panel earphone jack; push-pull audio amplifier: and rugged push-to-talk ceramic mike with coiled cord and plug. Going mobile? The 400's come with both 117 V.A.C. and 12 V.D.C. (positive or

negative ground) built in solid state power supplies. Supplied with AC + DC power cords, mike and mobile mounting bracket. Size: 12½,6%x5½,6%x3¾°D. Imported. Shpg. wt., 22 lbs. Lafayette Model HA-460 — 6 Meter Amateur Transceiver for 50.0-52.0 MC. 99 D 2579WX Net 149.95

\$8 monthly Crystals for HA-460. Specify Fundamental Frequency (divide operating frequency by 6). Will supply to nearest 5 KC.
40 D 5403C Specify Frequency
Lafayette Model NA-410 — 10 Meter Amateur Transceiver for 28.029.7 MC.


S8 monthly
Crystals for HA-410. Specify fundamental frequency (divide operating frequency by 4). Will supply to nearest 5 KC.
40 D 5402C Specify Frequency

92 Lafayette Cat. No. 671 Buy Now! Pay Later Use Lafayette's Easy Pay Plan. No Money Down

LAFAYETTE 100-Watt Mobile Linear Amplifier

SMALL... COMPACT ONLY 2 INCHES HIGH!

CONVERT FLEA POWER TO REAL POWER!



- No External Switching Required
- Will Work On Any Signal of 1 Watt or More AM, FM. SSB or DSB, and CW
- Completely Self-Contained 12 Volt Power Supply

Boost flea power to real high power for extended range and better readability. Provides up to 100 watts PEP input into a 50 ohm load (with 8 watts RF Drive). For use with all low power rigs having 1 watt or more of output power. Unique RF sensing circuit automatically switches in linear when transmitter is activated. This radio frequency sampling stage switches the linear's B plus voltage which instantaneously energizes the linear. Absolutely no external switching is necessary. Built-in relay directly connects antenna to input SO-239 coaxial socket when receiving. No internal connections are required to your existing equipment. Simply insert the unit in series with your transmitter (or transceiver) and antenna and you're on the air with a real punch. Operates on 6, 10, 11, and 15 meters (20-54 MC). Circuitry is broadbanded so only one tune-up is necessary on any band. Accepts any mode of operation—AM, FM, SSB or OSB, on any band. Accepts any mode of operation-AM, FM, SSB or DSB, and CW. Illuminated front panel meter indicates relative RF strength

Made in U.S.A. MANUEL HA-250


> Model HA-250

\$5 Monthly No Money Down

of linear's output signal when linear is on or exciter's RF strength when linear is off. Self contained power supply utilizes a high efficiency toroid power transformer. Ruggedly designed chassis with over sized heat sinks assure sturdy and cool operation. Supplied with comprehensive manual, fused DC power cables, and mounting bracket. Made in U.S.A. Shpg. wt., 3½ lbs. 40 0 0106WX 12 Volt DC Negative Ground Only Net 79.95

SPECIFICATIONS: Frequency Coverage: 20-54 MC. Plate Power Input: 50 Watts (100 Watts PEP). Minimum RF Drive: 1 Watt. Maximum RF Drive: 10 Watts. Input Impedance: 50 Ohms. Output Impedance: 40-600 Ohms (50 Ohms Nominal). Amplification Modes: AM FM, SSB or DSB, CW. Power Requirement: 11.5-14.5 Volts DC (Negative Ground Only). Power Consemblian. 32 Watts (100 C). Only). Power Consumption: 12 Watts Idling (1 Ampere at 12 Volts), 96 Watts at Full Input (8 Amperes at 12 Volts). Size: 7"0 x 9"W x 2"H.

IDEAL GIFTS FOR THE AMATEUR AND NOVICE



(8) Latayette Field Strength Indicater-Continuously indicates transmitter output. Features 200 μa, meter with variable sensitivity control.
99 D 2509 Wt., 7 oz. Net 6.75 (C) Lafayette SWR Bridge and RF Power Meter—Measures up to 15 watt output. Highly accurate SWR indications (1:1 to 1:10). For up to 50 Mc. For 52 and 75 ohm. 99 D 2508 Wt., 2 lbs. Net 19.95 (D) Lafayette Nuvistor Grid Dip Meter-Covers 1.7 to 180 Mc. in 6 bands. Complete 99 D 2503 Wt., 2 lbs. (E) Lafayette Brass Pounders Key—Features spring tension, silver contacts, and adjustable ball bearing pivots.

99 D 2555 Wt., 1½ lbs. Net 1.95

with plug-in coils. Superex Amateur (F) Superex Amateur Headphones—Comfortable dual impedance design (600 and 4-16 40 D 8501 Wt., 2 lbs. Net 24.45



LAFAYETTE CODE

PRACTICE OSCILLATOR

3-WAY OPERATION:

 Light Indicator • Variable Pitch Tone Light-Tone Combined

A Terrific aid for the beginning Morse Code learner or experienced hams who wish to improve their code speed. Completely self-contained. Efficient built-in speaker provides loud, clear signal. Excellent for group pracloud, clear signal. Excellent for group practice sessions. Variable pitch control gives pleasing tone by changing frequency. For private use, without disturbing others, you have a choice of earphone tone operation, flashing light or both together. Uses low drain battery-operated transistor oscillator. Specifications: Tone frequency range: Approx 500 to 2000 cre variable Controls. prox. 500 to 2000 cps, variable. Controls: Pitch, Tone, Light and Light/Tone. Terminals. Key, Earphone. Batteries: Includes 2 "C" cells. Case: HI-Impact bakelite. Size: 6½Hx 33/4Wx2"0. Imported. Shpg. wt., 11/4 lbs. 99 D 2560 Extra "C" Cells for Above (2 req.). Net 7.95

99 D 6257

Net ea. .13 Crystal Headset for Above 99 D 2550 Shpg, wt., 5 oz. ... Net 1.39

Net 3.50

12 LESSON CODE COURSE

13 D 2602



Self starting, accurate electric clock. Tells world-wide and local time. Calibrated in hours—1 to 24, minutes and seconds—1 to 60. Black dial with white graduations. Chrome plated case. U.L. approved. 110-120 V. 60 cps. AC. Shpg. wt., 1½ lbs.


24 HOUR WORLD CLOCK

Learn Morse Code the modern practical way. 12 lessons on a non-breakable high quality 33½ rpm long playing record. Perfect for home studying. Speed progresses steadily from 3 to 16½ wpm. Complete with sturdy record album and instruction manual, Shpg.

wt., 11/2 lbs.

To Speed Your Mail Order - Please Give Your Zip Code Number

Deluxe LAFAYETTE Citizens Band Antennas



(A) NEW IMPROVED LAFAYETTE "RANGE-BOOST/II'm END FEO V2-WAVE CB ANTENNA, Specially designed anti-static cloverleaf ball drastically reduces receiver noise by continuous dissipation of static discharge. Offers a 3.75 db true omni-directional gain. Tremendous signal to noise ratio improvement of 6-20 db. VSWR is 1.17-1. Insignal to noise ratio improvement of 6-20 db. VSWR is 1.17-1. Includes a phasing transformer, rubber covered for moisture resistance. Vertical radiator consists of 3 seamless aluminum tube sections topped by a solid aluminum 108" top section. 3 54" radials provide proper transmission line decoupling. New heavy duty mounting bracket. Direct ground lightning protection. 50 ohm. 17'6" over-all length Accepts up to 1½" masts PL-259 cable connector. Shpg. wt. 10 ib. Accepts up to 1½" masts PL-259 cable connector. Shog. wt. 10 lb. Less mast and coax cable.

SALE 15.95

(B) FAMOUS LAFAYETTE DELUXE 5-ELEMENT CB VERTICAL BEAM AN-(B) FAMOUS LAFAYETTE DELUXE 5-ELEMENT CB VERTICAL BEAM ANTENNA. Doe of the most powerful CB antennas ever offered by Lafayette! Tremendous 10 db forward gain multiplies your effective radiated power by as much as 10 times. Front-to-back ratio 25 db. V.S.W.R. under 1.5:1. Gamma matched to 52 ohm coax-transmission. All aluminum construction for greater weather resistance. Boom length 17 ft. Reffector element (highest 1814/ feet) Mounts on masts up to 2" in diameter. Turning radius 8'6". Vertical wind load 125 lbs. With complete mountaing instructions. Less mast and coax cable. With complete mounting instructions. Less mast and coax cable.

Shpg. wt., 15 lbs. Made in U.S.A.

42 0 0114WX \$5 Monthly

Net 37.95

(C) LAFAYETTE DELUXE HEAVY-DUTY GROUND PLANE ANTENNA, High efficiency ground plane antenna constructed of four solid aluminum 108" heat treated radials and one radiator. Elements supplied in two 54" lengths joined by threaded coupling nuts. Accepts 1¼" tubing, RG-58U 50 ohm coaxial cable and PL-259 coaxial connector. Less mast and coax. Imported. Shog. wt., 4 lbs. 99 D 3031W

(D) LAFAYETTE'S 3-ELEMENT VERTICAL BEAM CB ANTENNA. An exceptionally high gain, directional antenna which develops a forward gain of 8 db. Front-to-back ratio is 25 db: front-to-side, 40 db. 50 ohm feedline match for maximum efficiency. Comes with bracket for vertical or horizontal mounting, 114" 0.0, aluminum db. 50 dom't receipte materin for maximum erricency. Colles who bracket for vertical or horizontal mounting, 11/4" 0.0, aluminum boom is 8 feet long, %" to 1/4" 0.0, aluminum elements are approximately 161/2 ft. long. All steel hardware is irridite treated to MIL specs. Accepts up to 1½" mast. Completely factory pre-tuned, and furnished with instructions. Made in U.S.A. Less mast and coax cable. Shpg. wt., 11 lbs.

POLYFOAM COAX CABLE ASSEMBLIES


PL-259 Connectors on Both Ends

Steck No.	Type	Length	Wt.	Net
42 D 0910	RG8/U-50 ohms	50 ft.	7 lbs.	8.50
42 O 0911	RG8/U-50 ohms	100 ft.	11 lbs.	14.95

DELUXE CORNELL-DUBILIER MODEL AR-22R AUTOMATIC ROTOR FOR CB ANTENNAS

Heavy-duty rotor unit will handle antennas up to 150 lbs. Simoly set the control unit pointer to the desired direction, and the antenna will automatically rotate to this position and stop. Rotor will take masts from 7½" to 2" 0.0. Control unit is marked in compass points. N.S.E.W. NW. NE. SW, and S.F. For 110-120 volts. 50-60 cps AC. Requires 4 conductor cable. Shor. wt. 14 lbs. cable. Show, wt., 14 lbs. 42 D 8607WX \$5 monthly Net 33.27 100'coil of 4 conductor cable for AR-22R



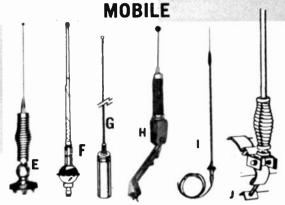

(E) FAMOUS LAFAYETTE ALL STAINLESS STEEL CB MOBILE ANTENNA Full quarter wave 102-inch stainless steel whip, heavy-duty chrome plated stainless steel spring and swivel ball jointed base designed for mounting on any surface. Base has lug terminals for 42 - 7002 cable assembly. Perfect for rear deck mobile mounting.
Less cable. Imported. Shpg. wt., 4 lbs.
99 0 3034WX Net 6.95

(F) LAFAYETTE CENTER-LOADED FIBERGLASS CB COWL MOUNT AN-TENNA. Only 48" high but performs like 102" antennas. Four foot whip eliminates the possibility of striking overhead objects and black plastic whip covering protects against shorting. Specially designed rocker support assures 8-point grounding and permits up to 355 mounting angle on fender, cowl, or rear deck—fits any 11%," to 11%" mounting hole. Complete with 5' RG-58/U cable. Shpg. wt. 3 lbs. Made in U.S.A.

42 0 0112W

(G) LAFAYETTE BASE LOADED "AUTO-TOP" CITIZEN BAND ANTENNA. The Lafayette Base Loaded "Auto-Top" Citizens-Band antenna offers the CB'er the ideal omni-directional signal pattern with very low signal to noise. This quality antenna consists of an inconspicuous-base loaded, neutral gray weatherproof phasing transformer (only 4" high, and 1" in diameter), a 39" stainless steel whip, and all mounting hardware including complete and simple mounting instruction sheets. Antenna mounts in 34" hole, Comes less cable. Shop, wt. 2 lbs. Made in U.S.A.

42 0 0120

(M) NEW LAFAYETTE BASE LOADED TRUNK MOUNT MOBILE ANTENNA. Exciting mobile antenna from Lafayette permits the CB'er to mount his antenna without any visible holes on his car. Special trunk groove mount requires just two tiny 2/32" holes in groove of car trunk lid. Installs in seconds. Antenna holds securely and is adjustable to all cars. Features base loaded, weatheroroof phasing transformer (only 4" high. 1" diameter) and a 39" stainless steel whip. Complete with all mounting hardware, simple mounting Instructions, Less cable. Shpg. wt., 5 lbs. 42 0 0145

(I) DELUXE LAFAYETTE HEAVY OUTY MOBILE CB-AM ANTENNA. Deluxe top loaded cowis mounted antenna doubles as Citizens Band antenna and AM broadcast antenna, Eliminates two antennas on your antenna and AM proadcast antenna, Eliminates two antennas on your car. Sturdy construction with heavy chrome plate. 46" long collapsing to 31". Fits the %" to $1\%_4$ " space left by auto antenna. Includes automatic dividing harness. 1' cable to AM set. 2' cable to CB rig and 5' cable with PL-259 plug to antenna. Small divider unit fits under dash. Imported. Shpg. wt., 4 lbs.

99 D 3060W (1) LAFAYETTE CB BUMPER MOUNT ANTENNA WITH STAINLESS STEEL STRAP. Features a full one-quarter wavelength 102" stainless steel whip and a fully adjustable chrome plated mount with a specially designed stainless steel strap to fit most cars. No loading coil— maximum efficiency! Heavy-duty chrome plated steel spring is built for extremely rugged mobile use. Imported. Shpg. wt., 3 lbs.

COAXIAL CABLE ASSEMBLIES FOR MOBILE ANTENNA APPLICATIONS:



TYPE A-Consists of 20 ft. RG-58/U cable with PL-259 plus UG-175/U on both ends. Required for Ground Plane, Coaxial and Mobile Antennas terminating in a coaxial plug. Shpg. wt., 8 oz.

42 0 7001 TYPE 8-Same as Type A except one end is terminated with Pt-259 plus UG-175/U and other end with universal ring type terminal lugs for mobile antennas. Shpg. wt. 8 oz.

Antennas Are Available on Easy Pay Plan-No Money Down

42 D 7002

Improve Your CB Performance With LAFAYETTE Accessories

Aural Monitoring of Local Transmitters

Visual Transmitter Monitoring with 'scope

In-Circuit Instant Connection to Antenna

LAFAYETTE CB TRANSCEIVER TESTER

Permits

Measures

- RF Power Output Relative Field Strength
- SWR % Modulation Crystal Activity **Generates**
- Crystal Controlled RF Signal
- Modulated Audio Signal
 1 KC Audio Signal
 - Sensitive D'Arsonval Meter

Features front panel jacks for aural and visual monitoring, audio generator output and RF signal generator output; ceramic jacks for standard miniature crystal sockets. Controls include Function Selector, Antenna Selector, Generator Selector, Modulation Calibrate Switch, Modulation Calibrate Control and Meter Adjust Control.

Sturdy professional type SO-239 sockets accept standard PL-259 connectors. Sturdy attractive molded case with brushed aluminum front panel. Includes 9V battery; 30" telescoping antenna. 7%x596x2%", Shpg. wt., 4 lbs.

Without Removing Cables From Transmitter

42 B 9126 \$5 Monthly Net 37.95

No Money Down

MADE IN U.S.A.

LAFAYETTE CENTER-LOADED MOBILE CB GUTTER **CLAMP ANTENNA**

ONLY

Made in USA

Easily removable when not in use prevents theft or damage. Gutter clamp snaps on rain gutter of automobile. Heavy spring assures positive grip. Clamp is heavily plated to resist corrosion, Only 20 inch in length—outstanding 11 meter per-formance SWR 1:1. Furnished with 12 ft. of RG58/U cable with PL-259 Connector. Shpg. wt., 3 lbs. Net 10.95 42 D 0125



BLITZ BUG LIGHTNING PROTECTOR



Designed to fit any standard coaxial cable, the "Blitz Bug" employs the spark gap printhe "Blitz Bug" employs the spark gap prin-ciple to eliminate static build up on coaxial cables. Provides a constant drain off, re-ducing chances of a direct lightning strike and in many cases eliminating noise prob-lems. Constructed of 34" D.O. brass by 2½" long. Employs one PL-259 plug and one DKCB connector (takes PL-259 plug). Wt., 1 ib. 42 B 2001 Model LAC-1 Net 3.85

NEW! LAFAYETTE 6-VOLT DC TO 12-VOLT DC CONVERTER



- All Solid State Circuitry
- 1-Amp output
- Converts 6-VDC to 12-VDC Solid State

Great News for CB'ers with 6 VDC negative. or positive ground battery systems. Now you can install a mobile communications system using your present 6 VDC system. Operate your HB-500, HB-500A, HB-525, HB-555, HB-600A and any other Solid State CB transceiver drawing less than 1-Amp during transmission. This unit will fit neatly under the deephosed or on the dispute the state. the dashboard, or on the firewall. Attractive miniature remote control panel with On-Off switch and pilot light indicator. Size: 51%, Wx 4½, Dx24"H. Imported. Shpg. wt., 4½; lbs. 99 D 3084

LAFAYETTE AUTO-MARINE ENGINE **NOISE SUPPRESSOR KIT**



- Must for Mobile CB and Ham Operators
- 14 Components Plus Hook-up Wire

This easily installed kit will effectively suppress ignition, generator and voltage regulator noise. Consists of 8 spark plug suppressors; 1 distributor suppressor, 1 voltage regulator suppressor; 4 coaxial capacitors; shielded cable and braid for wiring filter-system. All necessary hardware and instructions for installation are included. Shpg. wt., 2 lbs.

Net 8.45

GENERATOR NOISE FILTER

Enables quiet receiver operation for Citizens Band, Amateur and industrial frequencies. Standard frequency range 3-30 mcs. Maximum current 25 amps. Imported,

99 D 6018 Shpg. wt., 1 lb.

Net 2.49

ALTERNATOR NOISE FILTER



highly effective filter for alternator equipped automobiles. Attenuates alternator noise by 50 db. Can operate up to 32 volts DC. Results in quiet mobile receiver operation. Shpg, wt., 8 oz. 42 B 4900

VOLTAGE REGULATOR FILTER

 Will Operate on 6-12-24 & 32 Volt Systems 195



Eliminates noises in communication receivers caused by points in voltage regulator. Not voltage or frequency critical—no tuning Wt., 8 oz. 42 B 8901 Net 2.95

NEW LAFAYETTE MOBILE AM TO CB **ANTENNA CONVERTER** 1 Antenna Now Does the Job of 2 Converts Any AM Automobile Antenna to a Highly Efficient Combination CB and AM Antenna Only 695

> Specially designed Lafayette AM to CB an-Specially designed Lafayette AM to CB antenna converter consisting of a weather-proof loading coil with a universal mount and adjustable matching 7½" stub. Covers entire 27 MC Citizens Band. Easily attaches to your existing AM automobile antenna. Includes dividing harness which couples your new combination AM and CB antenna directly the control of directly to your Citizens Band Transceiver and AM auto radio. Imported. Shpg. wt., 2 lbs

Net 8.95

To Speed Your Mail Order - Please Give Your Zip Code Number

You Get Top Quality CB Accessories At LAFAYETTE



LAFAYETTE Priva-Com® III

Years Ahead in design-with Dual Tone High Reliability Selective Filter Circuitry



Real Tiny: 11/4 Hx3 1/4 Wx6 1/4"D.

NEW! PRIVA-COM IV Private Tone Caller For Lafayette Tube-Type CB Transceivers**

Same as Priva-Com III except "for use with Lafayette P.B-444/25 (starting with Serial No. 12101) and for Comstat 25 (starting with Serial No. 21351), 4"Wx5¾"Dx1¾,6"H. Shpg. wt., 3 lbs. Compatible with Priva-Com III. 99 D 3123

NEW! LAFAYETTE PRIVA-COM®V PRIVATE TONE CALLER

For Lafayette Tube-Type CB Transceivers*

- Compatible with Lafayette Priva-Com II and Priva-Com (HA-200 & HA-100)
- 10 Dual-Tone Frequency Capability
- Incoming Call Indicator Light
- Operates Horn or External Alarm

**Whates CB receiver until a Priva-Com dual tone signal is received. The speaker is then activated for audible communications.* For use with Lafayette Comstat 25 (up to and including serial No. 21350), Comstat 23, HB-444/25 (up to and including serial No. 12100), HB-444, HE-20, A, B, C, HE-90, HB-111, HB-200, HB-222, HB-333, and HB-400. 44, x2%(x5%%". Shpg. wt., 3 lbs.

42 D 0149 St monthly Net 34.95

or use with VOX or foot switch for transmit-receive changeover. Lightweight and comfortable, 8 ohm earphone has cushion for comfort and outside noise suppression. Crystal mike for high output and full modulation. Boom and headband adjusts to individual preference.
Smartly styled mike head mounted on swivel for maximum pick up.

For tube-type CB transceivers, With 5 ft., 4 conductor cable.

99 D 2565 | mported, Shpg. wt., 1 lb. | New LAFAYETTE "MITEY-MITE" CB MIKE. Expertly designed and professionally styled for real performance. Fits snugly in palm of hand for effortless operation. Features a "Long Life" ceramic ele-ment for truly dependable communications. Three conductors plus ment for truly dependable communications. Three conductors plus shield connected for electronic switching. Includes instruction sheet for conversion to relay switching. For all high impedance input CB transceivers (tube type). 176Wx1140x314"H. Imported.

99 D 4579 Shpg. wt., 8 oz.

Net 4.95

LAFAYETTE CB LOW PASS FILTER. Attenuates radiated spurious and other undesirable harmonic signals higher than 50 MC approximately 60 by the control of the control

and other undestrable narmonic signals nigner (nan 50 Mc approximately 50 db or more; Minimizes interference with your own or your neighbor's TV set. Simple to install with two built-in SO-239 connectors. Impedance is 50-75 ohms and connections may be reversed for same impedance match. Max. power rating is 100 watts. Size: 5x2x134". Shpg. wt., 1½ lbs.

42 D 0123 Net 6.95 (a) LAFAYETTE AUTHENTIC MECHANICAL FILTER. Cope with today's crowded bands. Provides a steep-skirted, flat top, ideal band pass response for superior selectivity. At 2.5 Kc on either side of the center frequency, the filter provides 60 db attenuation. Easily installed between mixer and 1st 1.F. stages. Specifications: Center Frequency, 455 kc; 6 db bandwidth 2 kc; 60 db bandwidth 6 kc; Input/Output Impedance 10K ohms; Insertion Loss, 1.5-3 db. Size: 234W15/8Hx13%***D (overall). Imported. Shpg. wt., 8 oz.

NOT 23. See 17.39 of 17.39 of

42 D 0127 Net 9.95
[F] LAFAYETTE CB AUDIO COMPRESSOR AMPLIFIER. Final power input remains within the legal 5-watt limit but effective talk power is increased many times by increasing average CB transmitter modulation. Requires very little power for operation hence existing power lation. Requires very fittle power for operation nemic existing power supplies may be utilized. With operating and installation instruction. Size: 3Hx376Wx5"0. Shpg. wt., 2 lbs. Not for HB-222 and solid -state (transistor) CB transceivers. Net 25.95

Solid State Private Tone Caller

For Lafavette 12 Volt Solid State CB Transceivers!

- 9 Transistors plus 2 Diodes
- No Reed Relay Contact Points-Longer Life!
- For Ouiet, Private Communications
- Dual Tone Minimizes Stray Signal Interference
- Incoming Call Indicator Light
- Mates Directly with Lafayette HB-555, HB-525A, HB-500A.

HB-600, HB-600A and HE-20T

Compatible with Lafayette Priva-Com IV

Lafayette's new Priva-Com III Selective Caller pioneers a new era in reliable transistorized private tone circuitry. Using new ingeniously designed ceramic and resonant tuning fork circuitry instead of conventional reed relays, the solid state Priva-Com III is exceptionally adaptable for reliable mobile as well as fixed station performance. Its tiny size makes it a handsome mate for even the smallest solid state CB transceivers. Its dual tone signal minimizes the possibility of the transceiver speaker being turned on by stray ignition and power line signals. The Priva-Com III mutes the receiver. When its call switch is activated, either at base or mobile stations, the transmitted dual tone is received by the other Priva-Com III. The CB transmitted dual tone is received by the other Priva-Com III. The CB receiver is activated and the indicator light goes on. This light stays on until manually reset. Both base and mobile units can initiate calls at any time. The Priva-Com III features 9-transistors plus 2-diode solid state circuitry; simple-to-operate push-button switches for Standby, Normal, Call and Reset; a Volume Control; and Indicator Light; a sturdy mobile bracket for mounting under dash, under transceiver, etc. Supplied with 2 plug-in selective ceramic and resonant tuning fork filters, one for 817.5 cps, and one for 997.5 cps tone frequencies; also includes a 11 prong plug at end of cable for direct mating with Lafayette HB-500A, HB-555, HB-525A, HB-600, HB-600A and HE-20T. Size: 1½,"Hx4"Wx534"0. Shpg. wt., 3 lbs. 99 D 3117 \$5 Monthly Imported.

Lafayette Miniature Plug-in Selective Filters

Plug-in ceramic/tuning fork selective filters that vary the frequencies of Priva-Com III and of Priva-Com IV. Any two different frequencies below may be used for dual tone Encoder-Decoder (Private Tone) calling. 1½Lx5/16Hx5/16°D. Imported. Shpg. wt., 4 oz.


99 D 3118 Fo	or 817.5 cps	\$4 \$ BAN PO . VEO C US COMM. S. BO AND AND SOD ON US OF ALL PS COMME	Ea. Net 4.95
99 D 3119 Fo	or 862.5 cps	***************************************	Ea. Net 4.95
99 D 3120 Fc	r 922.5 cps		Ea. Net 4.95
99 D 3121 F			Ea. Net 4.95
99 D 3122 Fo			Ea. Net 4.95

Depend on Lafayette for Everything in Electronics

COMSTAT°19 5-WATT TWO-WAY RADIO



- 9 Crystal Controlled Transmit and Receive Channels
- Front Panel Transmit and Receive Crystal Sockets Permit Easy Operation on 23 Crystal-Controlled Channels.
- Sensitive 23 Channel Tuneable Receiver Push-To-Talk Ceramic Mike with Coiled Cord and Positive Lock Plug.
- Pi Network Antenna Matching
- Convenient Variable Squelch Control



- Front Panel Crystal Sockets
- **Huminated Vernier Tuning Dial**
- Tuneable Receive Gial Control
- 5-Watt er 100-Milliwatt Switch (Rear) Medulation Monitor
- Phone Plug for Private Listening and
- External Speaker
- Microphone Socket Frent Panel 4" Speaker
- Volume Control/Power Switch
- Variable Squeich Control
- 9-Channel Crystal Transmit-Receive
- Selector Switch
- 12. Xtal-Tune Receiver Mode Switch



Advanced electronic circuitry utilizes 7 tubes and 3 diodes to achieve 13 stages of dynamic performance. Sensitive superheterodyne receiver permits reception of weak distant stations even in problem areas. Effective series gate limiter minimizes ignition and other noise pick-up. Receiver can be manually tuned or crystal controlled. Variable squelch control permits quiet automatic stand-by operation. Crystal controlled dual power transmitter permits choice of either 100 militwatt or full legal 5 watt RF input. Powerful audio stage delivers up to 100% AM plate modulation for real talk power. Monitor allows visual indication of modulation. Built-in 117 VAC power supply and optional 12 VOC power supply (see below) permit virtually unlimited applications. Front panel receive and transmit crystal sockets combine with 9 switched crystal positions to provide the flexibility of full 23 channel crystal coverage. Intermediate frequency: 455 KC. Receiver sensitivity: 1 µv @ 10 db signal to noise ratio. Output impedance: 50 ohms. Supplied complete with push to talk ceramic microphone with coiled cord and positive lock plug, bracket for mobile or shelf mounting. 117 VAC power cord, and a pair of crystals for channel 9. Size: 121/4Wx 8½0x5*H. Shpg. wt., 11½ lbs.

99 D 3067WX \$5 monthly

Net 69.95 Advanced electronic circuitry utilizes 7 tubes and 3 diodes to achieve 13 stages of dynamic

99 D 3067WX \$5 monthly 42 D 4701C Extra Transmit Crystal (Specify Channel) Net 2.25 42 0 4702C Extra Receive Crystal (Specify Channel) Net 2.25

HA-19 POWER SUPPLY Adapts Comstat 19 for 12 volt mobile operation. Size: 6Wx4Hx41/2"D. 42 D 4704W Shog. wt., 4 lbs.

5-WATT CITIZENS BAND TRANSCEIVER KIT COMSTAT 9

- 9-Crystal-Controlled Transmit and Receive Channels
- Front Panel Transmit and Receive **Crystal Socket**
- 23-Channel Tuneable Receiver
- High-Efficiency 7- Tube Circuit
- 115 VAC and 12 VDC Power Supply
- Pi-Network Antenna Matching

NO MONEY DOWN

Efficient 7-tube circuitry, top quality parts, plus Lafayette's famous easy-to-follow direc-Efficient 7-tube circuitry, top quality parts, plus Lafayette's famous easy-to-follow directions give you a CB transceiver with excellent performance, Incorporates 9 crystal controlled receive and transmit channels with an integrated tuneable 23-Channel receiver section for exceptional operating flexibility. Sensitive superheterodyne receiver features series floating gate noise limiter and a tuned RF amplifier for high gain and low noise reception. Sensitivity .8 µv for 10 db. S/N ratio, Selectivity: —26 db at 8 KC, Adjacent Channel Rejection: —31 db. Adjustable squelch circuit insures quiet stand-by operation. Transmitter provides full 5-watt input with up to 100% plate modulation. Front panel light indicates modulation. Short range operation for use as intercom at CB jamborees, etc. is facilitated by a 100 milliwatt switch. Output impedance: 50 ohms. Ceramic microphone features plug-in push-to-talk operation and coiled cord. External crystal sockets mounted on front panel for added flexibility. Built-in power supply operates on 117 VAC or 12 volts DC. or 12 volts DC.

Kit comes complete with parts; wire, solder, easy-to-follow manual, microphone, and sturdy attractive metal cabinet. Less crystals and vibrator. Shpg. wt., 20 lbs. 42 D 0915WX \$5 monthly Net 59.95 42 D 0915W \$5 monthly Net 2.25 42 D 0914C Receive Crystal (Specify Channel) Net 2.25

OPTIONAL DC ACCESSORIES

42 D 0916 Mobile Mounting Bracket 42 D 0917 DC Cable Assembly for 12V DC 32 D 5693 Standard 12V Vibrator Net 2.50 1.95 Net 42 D 0121 Solid-State ALTERNATE Vibrator Shpg. wt., 1 lb.

Citizens Band Equipment Is Available on Easy Pay Plan-No Money Down



1. Front Panel Crystal Sockets

2. Illuminated Vernier

Tuning Dial

3. Tuneable Receive Dial

Control

4. 5-Watt or 100 Milliwatt Switch (Rear) Modulation Indicator

6. Phone Plug for Earphone Listening


7. Plug-In Push-to-Talk Ceramic Mike

8. Front Panel Speaker 9. Volume Control/Power

Switch

10. Variable Squelch
11. 9-Channel Crystal Transmit-Receive Selector


Switch 12. Xtal-Tune Receiver Mode Switch



Money-Saving CB Two-

RG-58/U Cable Ass'y. 42-7002





99-3031W



8.50

TOTAL 135.35

from catalog

MODEL HB-555 SOLID-STATE CB 2-WAY SYSTEMS

MOBILE SYSTEMS Model HB-555 Solid State CB

99-3034WX

Transceiver Stainless Steel Body Mount Whip **Antenna**

20 Ft. RG-58/U Coaxial Cable Assembly

SAVE 4.70

12 lbs.

42 0 9024WXM

2.75



\$6 monthly

from individual catalog prices. 42 D 9022WXM Shpg. wt., 12 lbs. Net 104.95

Same system as above except with bumper mount instead of body mount antenna.
42 D 9062WXM Shpg. wt., 11 lbs. \$6 monthly SAVE 5.15 from individual catalog prices.

Package

Price

Net 106.50

Same as 42 D 9022WXM except with CB/AM AM broadcast and CB cowl mount antenna instead of body mount antenna. Shpg. wt.,

BASE SYSTEMS

Model HB-555 Solid State CB 99.95 Transceiver Model HB-502 117 VAC Solid State 16.95 **Power Supply** Heavy Outy Ground Plane Antenna 9.95

50 Ft. RG-8/U Low-Loss Coaxial Cable Assembly

SAVE 6.40

component prices.

\$7 monthly 42 D 9063WXM Shpg, wt., 28 lbs. Same system as above except with Lafayette "Range Boost TM II" high-gain 1/2 wave length base station antenna instead of Ground Plane antenna. Shog. wt., 34 lbs. 42 0 9064WMM ... Net 137.95 Monthly ... Net 137.95 42 0 9064WXM \$7.50 monthly SAVE 7.40 from individual catalog prices.

Net 103.95 SAVE 3.95 from individual catalog prices. MODEL HB-525 SOLID-STATE CB 2-WAY SYSTEMS

MOBILE SYSTEMS

Model HB-525 25 Channel Solid State CB Transceiver Stainless-Steel Body Mount Whip Antenna

20 Ft. RG-58/U Coaxial Cable Assembly

TOTAL 159.65

Package

Price

149 95

from individual SAVE 7.15 from individual catalog prices.

42 D 9065WXM Shpg. wt., 15 lbs. Net 152.50 Same system as above except with Bumper Mount instead of Body Mount antenna.
42 D 9066WXM Shpg. wt., 14 lbs. \$8 monthly

SAVE 7.70 from individual catalog prices. Same system as above except with "CB/AM" combination AM broadcast and CB cowl mount antenna instead of Bumper Mount antenna. Shpg wt., 14 lbs.

\$8 monthly 42 D 9067WXM SAVE 6.90 from individual catalog prices,

Net 151.00

BASE SYSTEMS

Model HB-525 25 Channel Solid State CB Transceiver 149.95 Model HB-502 117 VAC Solid State **Power Supply** 16.95 Heavy Outy Ground Plane Antenna 9.95 50 Ft. RG-8/U Low-Loss Coaxial 8.50 Cable Assembly

from individual **Package**

catalog prices. 95

Price 42 D 9068WXM Shpg. wt., 29 lbs. \$9 monthly Net 175.95

Same system as above except with high-gain "Range Boost 11" 1/2 wave length base station antenna instead of ground plane antenna. Shpg. wt., 35 lbs. 42 D 9069WXM \$10 monthly Net 184 95

SAVE 10.40 from individual catalog prices.

MODEL HE-20T SOLID-STATE CB 2-WAY SYSTEMS

MOBILE SYSTEMS

Model HE-20T Solid State CB 88.95 Transceiver Stainless Steel Body Mount Whip Antenna 20 Ft. RG-58/U Coaxial Cable 2.75 Assembly

TOTAL 99.65

from individual catalog prices

42 9070WXM Shpg. wt., 19 lbs. Net 94.95 Same 2-way system as above except with bumper mount instead of body mount antenna. Shpg. wt., 18 lbs. 42 D 9071WXM \$5 monthly Net 96.95

SAVE 4.70 from individual catalog prices,

Same system as above except with CB/AM Broadcast and CB cowl mount antenna instead of body mount antenna. Shpg. wt., 18 lbs. 42 0 9072WXM \$5 monthly Net 93.95 SAVE 3.95 from catalog component prices.

Package

BASE SYSTEMS

Model HE-20T Solid State CB Transceiver 89.95 Heavy Duty Ground Plane Antenna 9.95 50 Ft. RG-8/U Low-Loss Coaxial 8.50 Cable Assembly

> **TOTAL 108.40** from individual

catalog prices.

TOTAL 185.35

SAVE 4.90

Package ' **Price**

42 0 9073WXM Shpg. wt., 25 lbs. \$6 monthly Same system as above except with Lafayette "Range Boost 11" high-gain 1/2 wave length base station antenna instead of Ground Plane antenna. Shpg. wt., 31 lbs. 42 D 9074WYM \$6.50 monthly SAVE 5.45 from individual catalog prices.

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down

Way Radio Systems



COMSTAT 19 CB SYSTEMS

MOBILE SYSTEMS

SAVE 3.70 from individual catalog prices

Comstat 19 CB Transceiver Stainless Steel Body Mount Whip Ant 6.95 20 Ft. RG-58/U Coaxial Cable Assembly 2.75

TOTAL 79,65

Package Price

42 D 9059WXM Shpg. wt., 161/2 lbs. \$5 monthly . Net 75.95

Above except with bumper mount instead of body mount antenna. 42 D 9075WXM Shpg. wt., 15½ lbs. \$5 monthly Net 77.5 SAVE 4.15 from individual catalog prices.

Same as above except with CB/AM Combination Broadcast and CB Same as above except with CD/Am Confidence and antenna.

cowl mount antenna instead of Bumper Mount antenna.

22 n engawym Shoe, wt., 151/2 lbs, \$5 monthly SAVE 3.40 from individual catalog prices.

Price

BASE SYSTEMS

Comstat 19 Citizens Band Transceiver ... 69.95 Heavy Duty Ground Plane Antenna ____ 9.95 50 Ft. RG-8/U Low-Loss Coaxial Cable 8.50

TOTAL 88.40

42 D 9057WXM Shpg. wt., 221/2 lbs. \$5 monthly Net 84.50 Same package as above except with Lafayette "Range Boost 11" 1/2 wave length high-gain base station antenna instead of Ground Plane antenna. Shpg. wt., 28½ lbs.
42 D 9077WXM \$5 monthly \$
YOU SAVE 4.45 from individual catalog prices.

COMSTAT CB SYSTEMS

MOBILE SYSTEMS

Comstat 25 CB Transceiver Stainless Steel Body Mount Whip Ant 6.95 20 Ft. RG-58/U Coaxial Cable Assembly 2,75

TOTAL 149.65

Package Price

from individual catalog prices

Net 142.95

42 D 9052WXM Shpg. wt., 21 lbs. \$8 monthly Same system as above except with Bumper Mount instead of Body

Same system as above the Same system as above the Same System as above the Same System as a system as 42 D 9078WXM \$8 monthly YOU SAVE 7.15 from individual catalog prices.

Same as above except with CB/AM combination Broadcast and CB Cowl Mount antenna instead of Bumper Mount antenna.

42 D 9079WXM \$8 monthly Net 141.95

SAVE 5.95 from individual catalog prices.

Net 144.50

BASE SYSTEMS

Comstat 25 CB Transceiver 139.95 Heavy Duty Ground Plane Antenna _ 50 Ft. RG-8/U Low-Loss Coaxial Cable 8.50

TOTAL 158.40

42 B 9051WXM Shpg. wt., 27 lbs. SAVE 7.90 from individual catalog prices.

Same package as above except with "Range Boost 1/2 wave length base station antenna instead of Ground Plane antenna. Shpg. wt., 33 lbs.
42 D 9000WXM \$8 monthly Net 159.95
SAVE 8.45 from individual catalog prices.

HB-444/25A CB SYSTEMS MODEL

MOBILE SYSTEMS

Model HB-444/25A CB Transceiver __ 179,95 Stainless Steel Body Mount Whip Ant 6.95 20 Ft. RG-58/U Coaxial Cable Assembly 2.75

from individual catalog prices

TOTAL 189.65

42 D 9081WXM Shpg. wt., 25 lbs. .. \$10 monthly Above with Bumper Mount instead of Body Mount antenna 42 D 9082WXM Shpg. wt.. 24 lbs. \$10 monthly Net SAVE 7.15 from individual catalog prices.

Same system as above except with CB/AM combination Broadcast and CB Cowl Mount antenna instead of Bumper Mount antenna. 42 D 9083WXM Shpg. wt., 24 lbs. \$10 monthly Net 181.95 SAVE 5.95 from individual catalog prices.

Price

BASE SYSTEMS

Model HB-444/25A CB Transceiver ... 179.95 Heavy Duty Ground Plane Antenna 50 Ft. RG-8/U Low-Loss Coaxial Cable 8.50

TOTAL 198.40

from individual catalog prices

42 D 9084WXM Shpg. wt., 31 lbs. .. \$10 monthly Net 188.50 Same package as above except with Lafayette "Range Boost II" high gain 1/2 wave length base station antenna instead of Ground Plane Antenna. Shpg. wt., 37 lbs.
42 D 9085WXM \$10 monthly Net 197.95 SAVE 10.45 from individual catalog prices.

MODEL HB-600 SOLID STATE CB SYSTEMS

MOBILE SYSTEMS

Model HB-600 CB Transceiver Stainless Steel Body Mount Whip Ant 6.95 20 Ft. RG-58/U Coaxia! Cable Assembly 2.75

TOTAL 229.65

Package Price

from individual catalog prices 42 D 9046WXM Shpg. wt., 16 lbs. \$11.50 monthly Above with Bumper Mount instead of Body Mount antenna. 42 D 9086WXM Shpg. wt., 15 lbs. \$11.50 monthly Ne SAVE 5.15 from individual catalog prices.

Same as above except with "CB/AM" Combination Broadcast and CB Cowl Mount antenna instead of Bumper Mount Antenna. 42 D 9087WXM Shpg. wt., 15 lbs. \$11.50 monthly .. Net 223.95 SAVE 3.95 from individual catalog prices.



Package Price

BASE SYSTEMS

Model HB-600 CB Transceiver Heavy Duty Ground Plane Antenna 50 Ft. RG-8/U Low-Loss Coaxial Cable 8.50

TOTAL 238,40

catalog prices

42 D 9088WXM Shpg. wt., 22 lbs. \$11.50 monthly . Same as above except with Lafayette-"Range Boost SAVE 8.45 from individual catalog prices.

Make Lafayette Your One Dependable Source for Everything in Electronics

Lafayette Cat. No. 671



Model HB-600 Solid State "CB Commander" Range Boost 2-Way Radio

S9 Magazine 1965 "At the least, the HB-600 is a major breakthrough in CB communications...

23 CB Channels Choice from 5 **Business Band*** Channels

Separate license is required for CB and Business Band.



No money down

- Unique RF Noise Silencer (Pat. Pend.)
- 21 Transistors, 13 Diodes—Draws 1 ampere Maximum On Full Transmit!
- Mechanical Filter for Ultra Selectivity and Adjacent Channel Rejection
- Ultra-Stable Circuit Uses A Separate Crystal for Each Transmit/Receive Channel-All 27 CB Crystals Supplied!
 - RANGE BOOST. For greater "talk-power."
 - SQUELCH/PA. "Quiets" the receiver between calls—adjustable to suit operating conditions. Full counter-clockwise for PA operation.

*FCC Type Accepted

- Plug-in Dependable Sealed Relay Switching
- 0.5 µv Dual Conversion Receiver with 3-Crystal "Delta" Fine Tuning
- Pi-Network Output With Low Pass Filter
- Plug-in Facilities for Lafayette Selective Call Unit *
- Operates As a PA Amplifier with External PA Speaker
- Built-in Solid State 117 Volt AC and 12 Volt DC Power Supply
- . PHONE JACK. For headphones or speaker.
- NOISE LIMITER. Provides choice of noise reduction circuits (A) Audio Noise Limiter, (B) Audio Noise Limiter plus RF Noise Silencer.

The "CB Commander" offers every feature you'll ever want in a 2-way CB radio—PLUS provision for Business Band® operation! You get 23 crystal-controlled CB channels with an ultra-stable circuit that uses a separate crystal for each transmit/receive channel. And every crystal is supplied for CB—27 in all! There's even provision for 2 extra channels—lets you choose from 5 Business Band® frequencies—27.235, 27.245, 27.255, 27.265, or 27.275 Mc. Business Band® operation permits increased antenna height. gives you greater range and coverage—and less crowding! Range-Boost circuit increases average modulation and lets your voice gut through poise to each further. modulation and lets your voice cut through noise to reach further... gives you more "talk-power"! Reception is incomparable too. A dual conversion receiver provides high sensitivity—pulls in even the weak signals! RF Noise Silencer (Pat. Pend.) provides excellent ignition noise reduction—you learn what quiet operation really means! Other

top features include a costly mechanical filter that offers razor-sharp selectivity, Delta tuning, Variable Squelch, effective Automatic Noise Limiter, Push-Pull audio, plus provision for Public Address operation with external speaker. Bullt-in solid-state AC and DC power supply permits low drain operation on 117V AC or 12V DC (Neg. or Pos. Gnd). Supplied with push-to-talk dynamic microphone with coiled cord, AC and DC power cables, "quick-release" mounting bracket and hardware, microphone bracket. Dimensions: 4%6" high, 111%6" wide, 8" deep. Shpg. wt., 11 lbs. Imported.

99 D 3071WX \$11.00 monthly

Net 219.95
Business Band Crystals. Specify one of the following frequencies for which you have received Business Radio License—27.235, 27.245, 27.255, 27.265, or 27.275 MC.

42 D 0132C (Specify Frequency—only 1 Crystal Required) Net ea. 3.95

LAFAYETTE Model HA-450 2.5 Watt 6-Channel Crystal-Controlled Solid State Portable And Mobile CB Transceiver

D.O.T. No. 169361101



- . 6-Channel Crystal Controlled Transmit & Receive
- Powerful 2.5 Watt Input 12 Transistors, 4 Diodes
- External Plug-in Push-to-Talk Dynamic Microphone
- . "S" and Battery Meter, ANL, and Variable Squelch
- . Operates with 8 "D" Batteries Supplied
- Complete with Leather Carrying Case and Antenna

Use it as a powerful walkie-talkie with its self-contained "D" size batteries, or simply detach battery pack and switch to external antenna for ultra-compact under dash mobile installation. HA-450 has antenna for ultra-compact under dash mobile installation. HA-450 has the added optional feature of using 8 rechargeable nickel cadmlum "D" batterles for long-life portable operation. 6-channel selector with illuminated dial allows you to transmit and receive on six different CB channels. All-transistor circuit (8 Silicon, 4 Germanium) utilizes Automatic Noise Limiter and Adjustable Squelch for quiet communication. Motorola-type antenna jack for external antenna, with mobile/built-in telescopic whip antenna switch, mobile mounting bracket and cable make mobile installations quick and easy. Operate at 12 volt DC positive or negative ground from portable or mobile (car, boat, etc.) batterles. Size: with battery pack, 10½L x 6D x 2¼ "H. Mobile, 10½L x 4½D x 2¼ "H. With FCC License Application Form 505 per Regulation 95 and pair of channel 9 crystals. Imported.

99 D 3063L \$5.00 Monthly Shgg. wt., 8 lbs.

99 D 3063L \$5.00 Monthly Shpg. wt., 8 lbs. Net 99 D 6256 Replacement "D" Cells (8 required) Net Each 32 D 4884 Heavy duty "D" Alkaline Batteries (8 req'd) Net Ea. 42 D 0907C Extra Transmit Crystal (Specify Channel) Net 42 D 0135C Extra Receive Crystal (Specify Channel) Net 42 D 3206 Adapter PL259 Plug to Motorola Plug Net .13 .49 2.25 2.25

* See Page 96 for Matching Priva-Com® Equipment

Comstat * 25 Crystal Controlled Range Boost™Two-Way Radio

23 CB CHANNELS - AN Crystals Supplied!

- 15 Tube Performance with 10 Tubes, 2 Transistors and 9 Diodes
- Built-in 117 VAC, 12 VDC Solid-State Power
- Dual Conversion Receiver Features 8/10 uv Sensitivity
- Final Utilizes Pi-Network and Low Pass Filter for Maximum Power Output



Exclusive Range Boost circuit greatly increases the average talk power. Fine tuning vernier control with 2.5 KC total bandspread simplifies precise zeroing in on frequency. Highly selective circuits greatly suppress adjacent channel interference (—45 db) and a variable squelch effectively quiets the receiver between calls, Switchable power level allows operation at 100 milliwatts for transmission over short distances. Illuminated front panel meter indicates relative RF output in transmit position and doubles as an S-meter during reception. Front panel switch converts transceiver to a handy 4.5 watt public address amplifier. Comstat 25 features push-to-talk relay switching and a plug-in ceramic microphone with colled cord. Rear socket is pre-wired to accept Lafayette PRIVA-COM and PRIVA-COM WI selective call thirts supplied with varietilt mounting bracket. Size. 12W-814-DW PRIVA-COM IV selective call Units supplied with vari-tilt mounting bracket. Size: 12Wx81/2Dx 5"H. Imported. Shog, wt., 16 lbs.

99 D 3065WX \$7.50 monthly

Net 139.95

Range Boost Switch Illuminated S/RF Meter **Huminated Channel Indicator** Single-Knob Channel Selector Modulation Indicator Light CB/Public Address Switch Headphone/External Speaker Jack Positive-Lock Mike Connector 2.5 KC Fine Tuning Vernier Adjustable Squelch Control with Standby Switch for Low Drain Instant Operation

New! Model HB-444/25A Deluxe Crystal **Controlled Range Boost Two-Way Radio** 23 CB CHANNELS -All Crystals Supplied!

- Dual Conversion Receiver with 3/10 μν Sensitivity.
- 16 Tube Performance with 12 Tubes (2 Nuvistors) and 11 Diodes, 2 Transistors
- Low Noise Nuvistor "Front End"
- Built-in Solid State 117 VAC & 12 VDC Power Supplies
- Deluxe Metal Cased PTT Ceramic Microphone

12 TUBES 11 DIODES 2 TRANSISTORS

Advanced design of this frequency synthesis Robatical design of this requency synthesis of any one of the channels! NO EXTRA CRYSTALS TO BUY! A dual diode full-wave Range Boost circuit increases the average depth of moducircuit increases the average depth of modulation with effective greater range during transmission. Uses 12 tubes (including two nuvistors) and 11 diodes, as well as a pi-network output for top performance. Dual conversion receiver has .3 µv sensitivity and low noise figure plus a variable Delta fine tuning network for maximum reception and adjacent channel rejection. The receiver also has a variable noise limiter, variable squelch and an Automatic Volume Control. Equipped with a CB-P.A. volume control and switch

the HB-444/25A can also be operated as a public address amplifier to an external plugin speaker. The transmitter is equipped with a metal-cased ceramic push-to-talk micro-phone. Operates with equal ease in both fixed and mobile locations—contains a built-in solid-state power supply for 117 VAC and 12 VDC operation. A built-in Selective Call socket accepts the Lafayette Priva-Comtm or Priva-Com IV for silencing the receiver between calls. With deluxe microphone, two power cables. FCC license Application Form 505. per Regulation 95. Size: 12Wx856Dx5"H. Imported. Shpg. wt., 20 lbs. 99 D 3074WX \$9 monthly

Net 179.95



FEATURES

Advanced Full-Wave

Range Boost Circuitry
Illuminated "S" and RF Power Neter

Illuminated "S" and RF Power Meter Vari-Tilt Mounting Bracket Variable Noise Limiter Variable Squelch Delta Fine Tune CB/P.A. Volume Control & Switch Phone and External Speaker Jack Illuminated Function Indicator Strip Illuminated Channel Indicator Selective Call Socket

Selective Call Socket

The Automobile Manufacturers Association, has applied to the Federal Communications Commission for 27.235MC and 27.245MC frequencies to be used for mobile emergencies in their proposed H.E.L.P. (Highway Emergency Locating Plan) program

Until FCC approves the H.E.L.P. program it is illegal to operate on these frequencies.

101



Two-Way Radio Model HB-555 Mobile-Ade

5-Watt Solid State Mobile CB Two-Way Radio



- ★ 14 Transistor, 4 Diode Circuitry
- **★ 12 Channel Crystal-Controlled** Transmit and Receive
- ★ Full 5-Watt Input—FCC Max.
- **★ Double Conversion Superhet** with 455 KC Mechanical Filter
- ★ Push-Pull Audio Amplifier-Modulator

Only



- FOR: Personal Use Emergency Variable Squelch Control Plus Automatic Series
- Gate Floating Noise Limiter Push-To-Talk Microphone
- Large Self-Contained 3 x 5 Inch Speaker

This 12 channel diminutive crystal-controlled transmit and receive of channel 9 crystals, and FCC License Application Form CB transceiver provides dependable two-way communication for cars, Regulation 95. Size 51% W x 7%D x 2½"H. Shog. wt., 7 lbs. taxis, trucks, boats and even motorcycles. Full 5-Watt transmitter input with highly efficient push-pull audio modulator and extrasensitive double conversion superheterodyne receiver gives you a 42 D 0907C Extra Transmit Crystal (Specify Channel) husky signal to punch through the interference of crowded channels. Razorsharp selectivity and adjacent channel rejection is achieved by the 455-KC mechanical filter. Sensitivity: 7 μr for 10 db signal-tonoise ratio. Dynamic push-to-talk microphone activates dust-free enclosed transmit/receive relay. PA Speaker/Earphone jack provides 2¼"H. Imported.

Sistening or public address amplifier operation. Also has socket for 9D 3084 Shog. wt., 5 lbs.

Microphone, sturdy mobile mounting bracket, power cable, pair

- For 12 Volts DC Negative or Positive Ground or 117 Volts AC with Optional AC Power Supply
- · With Pair of Channel 9 Crystals for CB and Emergency Mobile Aid

POWER SUPPLIES
6-Volt DC to 12-Volt DC Converter. Permits mobile operation on 6-Volts negative or positive ground battery. Size: 511/4, W x 41/4D x

NEW! MODEL HE-20T SOLID STATE CB TWO-WAY RADIO FAMOUS CB FAVORITE... NOW ALL SOLID STATE



With 7-Stage Transmitter For Extra Transmitting Sock!

- 12-Channel Crystal-Controlled Transmit & Receive
- 23-Channel Tuneable Receive
- 13-Transistors, 10-Diodes
- Push-Pull Audio Modulator
- 117 VAC & 12 VDC Negative or Positive Battery Ground
- Pi-Net Output
- TVI Trap
- Cool, Instantaneous Operation

Newest addition to the popular HE-20 series of CB transceivers. Solid Newest addition to the popular HE-20 series of CB transceivers. Solid State circuitry features low battery drain and provides instant operation; full 5-watt transmitter input with efficient push-pull audio modulator; a dual conversion superhetrodyne receiver with fine selectivity and adjacent channel rejection is obtained through a 455KC mechanical filter. Sensitivity: 7µv for 10 db signal-to-noise ratio. Receiver also incorporates automatic floating series-gate noise limiter and variable squelch control. Other features; dust-free transmit/receive relay, earphone jack for headphones or external extension speaker for CB/Public Address application, TVI trap, spotting switch for accuracy on tuneable receive, mobile mounting bracket, front panel mounted 4" speaker, a rear mounted low-loss antenna jack accepts SO-239 connector used with ground plane and direct mounting antennas. Complete with fused DC line cord for negative ground battery, push-to-talk mike and set of crystals for channel 9.

H.E.L.P.* Transmit crystal (specify 27.235MC and/or 27.245MC) 42 D 0907C

Net H.E.L.P.* Receive crystal (specify 27.235MC and/or 27.245MC)
42 D 0137C Net 2.25

*Automobile Mfr's Association has applied to the FCC for 27,235MC. jack accepts SO-239 connector used with ground plane and direct 27.245MC Frequencies for Highway Emergency Locating Plan (H.E.L.P.), mounting antennas. Complete with fused DC line cord for negative When this application is approved you can order these crystals from ground battery, push-to-talk mike and set of crystals for channel 9. our stock. Illegal to operate "H.E.L.P." prior to this approval.

NEW! LAFAYETTE HB-525 Solid State Mobile 2-Way Radio

23 CB Crystal Controlled Channels All Crystals Supplied!



- 19 Transistors, 7 Diodes, Thermistor
- **Dual Conversion for Extra**
- Selectivity and Sensitivity

 3-Position Crystal Delta Tune for
 Accurate Fine Tuning

 Mechanical 455 KC Filter for
- Superior Selectivity
 Variable Squelch plus Series Gate
 Automatic Noise Limiting

Compact 2-Way radio blends elegant die cast front panel craftmanship with dependable temperature compensated solid state cirtemperature compensated solid state cir-cultry to achieve a new high in engineering excellence. Frequency synthesizer includes crystals for all 23 CB plus 2 Highway Emergency Locating Plan (HELP)* channels. WO EXTRA CRYSTALS ARE NEEDED! Top notch 19 transistor, 7 diode, 1 thermistor design consumes less than 1 ampere of current on full transients and carrille latest transients. full transmit and permits instant-on operation.

Dual conversion superheterodyne receiver features a 455 KC mechanical filter for superior selectivity and high sensitivity. Greatly supresses adjacent channel interference. Three position crystal delta tuning facilitates reception of off-channel stations. Series gate noise limiter minimizes noise. Variable squeich stage assures silent stand-by operation. 3 x 5 inch PM speaker with audio directive louvered grill provides clean,

audio directive foregree gril provides clean, clear sound reproduction.

Transmitter offers full legal 5 watt input RF power. Efficient PI-Network provides optimum output. Range Boost modulating circuitry greatly increases real talk power.

- Range Boost Circuitry for Added Talk Power
- Serves as A Public Address
- Amplifier with External Speaker Pi-Network for Optimum RF Output 12-Volt DC Operation (Positive or Negative Ground) (6-Volt DC Operation with Optional

DC to DC Supply)

Automatically switched indicator light shows RF output and modulation peaks or comparitive signal strength on reception. Built-in TVI filter is designed to effectively minimize television interference.

operates on 12V DC positive or negative ground. May be used as a 2.5 watt public address amplifier with external speaker. Supplied complete with mobile mounting bracket, fused DC cable, Push-to-Talk plug-in dynamic microphone with coiled cord, and FCC form 505 CB License application as per FCC Regulation 95, Dimensions: 2½Hx61/4Wx 870 Shop wt 10 lbs 8"D. Shpg. wt., 10 lbs.

99 D 3076WX \$8 Monthly MODEL HB-505 6-VOLT DC POWER CONVERT-ER —Permits operation of HB-525 on 6 voits DC negative or positive ground. Supplied with remote on-off Indicator panel. Dimensions: 511/16Wx44bDx244"H. Shpg. wt., 4 lbs. 99 0 3084 Net 19.95

MODEL HB-502 AC POWER SUPPLY for 117 V.A.C. base station operation of HB-525. Dimensions: 6Wx77/aDx24/4"H. Shpg. wt., 8 ibs.

99 D 3066

*The Automobile Manufacturers Association has applied to the Federal Communications Commission for the frequencies of 27.235 MC and 27.245 MC for use in a H.E.L.P. Mobile Emergency Program (Highway Emergency Locating Plan). The HB-525 will person to the HB-5 mit instant H.E.L.P. operation, upon approval of this application, on 27.235 and

Until FCC approves the H.E.L.P. program it is illegal to operate on these frequencies.



External Features

- Socket for Push-to-talk Plug-In Dynamic Microphone with Coiled Cord for Relay Switch-
- 2. Volume Control / On-Off
- Switch Variable Squelch/PA Control Audio Directive Louvered Grill for 3 x 5 Inch PM
- Speaker
 5. Crystal Delta Tune
 6. Illuminated Transmit and Modulation Indicator
 7. Illuminated 25 Channel Selector Dial
 8. Die Cast Front Panel
 9. SO-239 Antenna Jack (Rear)
 10. Power Socket for Fused DC Cable (Rear)
 11. TVI Filtering Trap (Rear)
 12. PA External Speaker/Earphone Jack (Rear)
 13. HB-502 A.C. Power Supply

103



YOU CAN HOLD IN OUR HAND! Dyna-com 5

HROUGH!

WATTS of POWER

★3 Switchable Crystal Controlled Transmit and Receive Channel Positions for All 23 Channels

with leather Shoulder Strap

No Money

Down

- ★ 5-Watt FCC Maximum Input...with the Power of the Most Powerful Base and Mobile CB Transceivers
- ★ 13 Transistors, 6 Diodes
- ★ 7-Stage Transmitter for Extra Transmit Sock!
- * Operate Mobile in Your Car with Optional Cigarette Lighter plug-in Adapter
- External Antenna Jack Permits Use with Base Station and Mobile Antennas
- Provision for External Battery Pack, Mobile Battery and Battery Charger
- Pi-Network Antenna Matching for Maximum Output Push-pull audio/modulator circuit for more powerful
- speech transmission and reception

in portable convenience. Attractive die-cast brushed aluminum case with shoulder carrying strap. Measures only 31/4W x 101/4H x 21/4 "D. Supplied with transmit and receive crystals for channel 10, telescoping whip antenna and FCC license application form per regula-tion 95. Imported. Shpg. wt., 5 lbs. Less batteries. See optional accessories.

99 D 3087L \$5 monthly

.. ea. Net .325

Net 99.95

In addition, an optional portable dry cell power pack keeps reserve power on tap when you need it. The unit may be connected to your auto, boat or tractor battery and external antenna for the ultimate

Power

mum Noise

Indicator

Extra Crystals, Specify Channel 42-4204C Transmit Net 2.25 42-4205C Receive Net 2.25 DYNA-CDM 5 - Modified for 26.62 Mc

(CAP) 99 D 3107YL \$6 monthlyNet 109.95 DYNA-CDM 5 - Modified for 27.575 Mc (Gov't) 99 D 3108YL \$6 monthly Net 109.95

Extra Battery Pack

Consists of extra removable back of walkie talkie plus battery holder and 12 nickel cadmium rechargeable batteries. Permits charging of complete Battery Pack outside of walkie-talkie while an-other Pack is in use with DYNA-COM 5. Imported. Shpg. wt., 2 lbs. 99 D 3099 Net 29.95

Automatic Compressor Range Boost — Assures High Talk

Battery Condition and Automatic Relative RF Power Output

The Dyna-Com 5 is small in size—BIG in performance and versatility.

A Lafayette exclusive, this amazing 2-way radio has every feature you have ever wanted in a compact walkle-talkie. The unique, removable battery pack facilitates charging ni-cad batteries on or off the walkle-talkie. You always have a fresh supply of batteries on hand.

Variable Squelch and Automatic Nolse Limiting for Mini-

Neatly designed external battery pack with 10 "D" size dry cell batteries. Plugs into DYNA-COM 5 to assure reserve power when required in the field. Imported 3x31/8 x71/2". Shpg. wt., 4 lbs. 99 D 3101

ACCESSORIES Battery Accessories for DYNA-CDM 5 Nicad Rechargeable Batterles. 32 D 4740 (12 required) ea. Net 1.93

Alternate Heavy-Duty Alkaline Batteries

DYNA-PACK

32 D 4886 (12 req.)

Replacement "D" Dry Cell Batteries 99 D 6256 (10 required) ... Ea. Net .13 lots of 10 Ea. Net .125 Replacement "D" Heavy Duty Alkaline Batteries for DYNA-PACK 32 D 4884 (10 req.) ... Ea. Net .49

www.americanradiohistory.com

DYNA-CHARGE

Efficient nickel cadmium battery charger capable of charging from 8 to 15 nickel cadmium "?" size cells. Recharging current, 40 milliamps. 117v. 60 cycle AC input. Plugs directly into DYNA-COM 5 charge jack and into jack of Extra Back Battery Pack. Size 3% x 2". Imported. Shpg. wt., 2 lbs. 99 D 3100 Net 9.95 Efficient nickel cadmium battery

ANTENNA ADAPTER - CABLE Connects PL-259 plug of external antenna to Dyna-Com's external antenna jack. 42 D 0920 Net 2.95

Mobile cigarette lighter cable assembly permits operation of Dynacom from car 12 volt DC cigarette lighter. 99 D 4605 Net 2.95

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down

Lafayette Cat. No. 671

104

HA-300B 2-Watt 3-Channel 18 Semiconductor CB Walkie Talkie





42 D 4205 Receive Crystal (specify freq.)

Only

No Money Down

· 2-Watts Input for Super Power

 3-Crystal Controlled Switchable Transmit and Receive Channels

Automatic Range Boost ▼■

• 13 Transistors, 5 Diodes

Push-Pull Modulator and Audio Output

• Full Variable Squelch

Automatic Noise Limiting
 AVC

· Battery and RF Indicator

With Genuine Leather Case, Earphone, Battery Holder

Powerful 2-watt transmitter combined with extra sensitive super-heterodyne receiver make this an ideal portable 2-way communi-cations instrument for industry, as well as camping, fishing and hunting. Deluxe features include 3 switchable crystal control chan-nels for greater versatility; automatic Range Boost on transmit mode for more effective range; variable squelch control and automatic nor more effective range; variable squeich control and automatic noise limiter for quieter communications. Has battery condition and relative RF power meter indicator. Designed to custom fit various power options according to needs (see below). Complete with leather carrying case, strap, earphone, set of crystals for channel 7, 52° telescoping whip, battery holders for 8 1½ Volt pen cells or 10 114 Volt nickel cadmium batteries, jack for external base or mobile antenna and FCC license application form 505, per regulation 95. Attractive, die-cast metal case, 9Hx3½Wx1¾°D. Imported. Shpg. wt. 3½ lbs.

99 D 3082L Less Batteries. \$5 monthly 32 D 4886 Héavy duty Alkaline Pencell battery (8 req.) Ea. Net .325 Battery Pack. Consists of holder plus 10 NiCad Batteries.

32 D 4740 Replacement Nickel Cadmium Batt. Ea. Net 1.93 AC Battery Eliminator for HA-300B plus Charger for Nickel Cadmium batteries. Fused. 12v DC output Imported.

99 D 3083 Shpg. wt., 4 lbs.

Net 13.95

Model HA-300B Modified for operation on C.A.P. 26.62 mc 99 D 9176YL Net 72.95

99 D 917616.

Model HA 300B Modified for operation on 27.575 Gov't Freq.

Net 72.95

Model HA-303 2-Watt 3-Channel 17 Semiconductor CB Walkie Talkie WITH TONE CALL ALERT

Net 2.25

Net 2,25



ONLY Each

No Money Down

• 13-Transistors, 4-Diodes

Push-Pull Modulator and Audio Output

Superhet Receiver plus RF Amplifier

Battery Condition Indicator

Variable Squelch

Automatic Noise Limiting
 AVC

 With Leather Carrying Case External Antenna Jack

Battery Eliminator Socket

3-Crystal Controlled Transmit and Receive Channels For Multi-Channel Versatility!

2-Watts Input for Super Walkle Talkie Power! Range Boost with Switch for Greater Audio Range!

Powerful, dependable walkie talkie features 3 channel operation for Powerful, dependable walkie talkie features 3 channel operation for lexible communications—a great aid on crowded channels. Can be used to efficiently keep you in contact with the office, home, or possibly other members of your hunting or fishing party. The HA-303's superhet receiver has a tuned RF amplifier to pull in weak signals with ease. Selective circuits virtually eliminate annoying electrical and lignition interference. Can transmit or receive an alerting tone signal with tone slide switch in CALL or NORM positions respectively. Operates on batteries or 117 volts AC with optional battery eliminator. Other quality features include; built in battery condition meter, jack for connecting any existing mobile or base station antenna, and attractive metal case with die cast front panel. Supplied with telescoping antenna, battery holder (less batteries). Supplied with telescoping antenna, battery holder (less batteries), one set of crystals for channel 11, and FCC License Application Form 505, per regulation 95. Size: 3½ W x 8¼ H x 1¾" D. Imported. Shog. wt. 3½ lbs.

99 0 3091L \$5 monthly

Net ea. 54.95

32 D 4740 Nickel Cadmium Battery (10 req.) Net ea. 1.93 Heavy Duty Alkaline Penlight Battery (10 req.) 32 0 4886 Net ea. .325

32 U 4885
99 0 3109 Battery Eliminator-Charger Net 13.95
Model HA-303 Modified for C.A.P. 26.62 MC (less batteries)
99 0 3095YL (Specify 26.62 MC) \$5 monthly Net ea. 64.95
Model HA-303 Modified for Gov't 27.575 MC (less batteries)
99 0 3095YL (Specify 27.575 MC) \$5 monthly Net ea. 64.95

Buy Now! Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down Lafayette Cat. No. 671

LAFAYETTE Walkie-Talkie

Our Walkie Talkies







Our low, low Price

106

599 each

No License Required, FCC Regulation Part 15 10 95 each
No License
Required,
FCC Regulation
Part 15

ONLY 14

95 each
No License
Required,
FCC Regulation

MODEL HA-70C ALL TRANSISTOR "SPACE COMMANDER" CB WALKIE TALKIE

- Not a Kit—Completely Wired
- Crystal Transmit
- Sensitive Superregenerative Circuit
- Interstage Driver Transformers . . . More Audio, Huskier Modulation

Excellent for countless short range applications up to 1/4 mile. This compact Lafayette Walkie Talkie is a 3-transistor transcelver with crystal control on transmit and with efficient super-regenerative receiver—has minimum external ignition noise pickup when voice signal is being received. Has Push-to-Talk button, on-off volume control and efficient speaker that is also used as micro phone. Complete with built-in telescopic antenna, crystal, 9-volt battery and plastic carrying case. Size: 5½x2½x1¾". Imported.

Shpg. wt., 1 lb.
*Does not have plug in crystals.
*99 p 3080L Model HA 70C _____ Net ea. 5.99

99 D 6021 Replacement Battery ___ Net .21

RECHARGEABLE BATTERY CHARGER FOR WALKIE TALKIES ON THIS PAGE

9-Volt Lead-Acid Rechargeable Battery Plus Charger, Imported. Shpg. wt., 6 oz. 99 D 9016 Net 2.69 Replacement 9-Volt Lead-Acid Rechargeable Battery, Imported. Shpg. wt., 2 oz. 99 D 6026 Net 1.29

MODEL HA-130A 5-TRANSISTOR SUPERHETERODYNE CB WALKIE-TALKIE

Superheterodyne — Not Superregenerative

- Power Packed 4 Transistor Distance Spanning Transmitter
- Greater Sensitivity and Selectivity with Less Receiver Noise

5 transistor, 2 diode circuit employs crystal-controlled superheterodyne receiver for clear, crisp reception and 4 transistor 100 milliwatt transmitter using plug-in, easy-to-change crystals. Simple to operate—only a push-to-talk switch and on/off volume control Collapsible 34-inch antenna. Housed in durable black and silver simulated leatherette plastic case. Supplied with channel 10 transmit and receive plug-in crystals and 9 volt battery. Size: 234WM554BM5 11½-70. Imported. Shpg. wt., 23½BMS 99 0 30891. Net ea. 10.95

Transmit Crystal (specify channel)
42 D 4204C Net ea. 2.25
Receive Crystal (specify channel)
42 D 4205C Net ea. 2.25
99 D 6021 9 Volt Battery Net .21

MODEL HA-62 2-CHANNEL 6-TRANSISTOR SUPERHETERODYNE CB WALKIE-TALKIE

Increased Sensitivity— Increased Selectivity— Minimum Receiver Noise!

- New 5 Transistor Transmitter Circuit for Super Talk Power!
- 6 Transistors Plus 2 Diodes
- Push-Pull Audio

Small lightweight transceiver includes a selective superheterodyne receiver section which incorporates capacitor-fed reflex circuitry. Design yields the equivalent of 9 transistor functions! This combines with push-pull audio and 2 channel operation to permit greater flexibility, higher sensitivity, and extended range. Applications are virtually unlimited. Case features beautiful diecast chrome high-lighted front panel. Supplied with built-in earphone |ack, carrying strap, telescoping antenna, battery, and crystals for channel 9. Size: 5%HX11/4DX23/4"W. Imported. Shpg. wt., 3 lbs. 99 D 30791.

99 D 3079L Net ea. 14.95 99 D 6021 Replacement Battery Net .21 Transmit Crystal (specify channel) 42 D 4204C Net 2.25

Receive Crystal (specify channel)
42 D 4205C Net 2.2

Latayette Cat. No. 671 Buy Nowl Pay Later . . . Use Lafayette's Easy Pay Plan. No Money Down

Feature Plug-In Crystals ... A Snap To Operate 23 Channels









No License Required. **FCC** Regulation

MODEL HA-295 2-CHANNEL 8-TRANSISTOR SUPERHET WALKIE TALKIE with RANGE BOOST

- Powerful 6-Transistor Transmitter For Real Talk Power
- · Push-Pull Audio and Modulator
- Range Boost for Greater Range

Powerful 8-transistor, 3-diode circuitry, com-bined with push-pull audio provides dependable talk-listen power over extended range Special 6-transistor transmitter circuitry gives clear crisp audio under adverse conditions: RF stage improves reception. Housed in a "high impact plastic case." Excellent for any commercial or recreational use; In-door or outdoor activities. Supplied with hand carrying strap, telescopic whip antenna, earphone and 9V battery plus crystals for channel 10. Size: 61/4Hx13/4Wx21/2"D. Im-Shpg. wt., 11/2 lbs.

99 D 3078L Net ea. 19.95

9 Volt replacement battery. Shpg. wt., 3 oz. 99 D 6021 Net ea. .21

Transmit Crystal (specify channel) 42 D 4204C Net 2,25

Receive Crystal (specify channel) 42 D 4205C

9-Volt Lead-Acid Rechargeable Battery Plus 99 D 9016 Imported, Shpg. wt., 6 oz. Net 2.69

Replacement 9-Volt Lead-Acid Rechargeable

Battery 99 D 6026 Imported, Shpg. wt., 2 oz. Net 1.29

No License Required, FCC Regulation

MODEL HA-99 2-CHANNEL 300MW SUPER POWER WALKIE TALKIE 9-Transistors, 3-Diodes, 2-Thermistars

- Two Switchable Channels
- 300 Milliwatts Power
- Range Boost For Greater Range
- Push-Pull Audio and Modulator
- With Leather Carrying Case

Beautifully styled Walkie Talkie features 300 Milliwatts input and built in Range Boost circultry increasing effective range. Crystal controlled transmitter and superhet receiver. RF stage improves reception. Pushaudio for better sound. Two switchable channels give multiple channel versatility at the flip of a switch. Supplied with pair of crystals for channel 10, batteries, leather carrying case telescoping antenna. Handsome black and silver metal case. Complete with F.C.C. License application Form 505, per regulation 95. Size: 2%W x 7½H x 1½"D. Imported. Shpg. wt., 2¾ lbs.

99 D 3072L Net ea. 29.95 Extra Transmit Crystal (specify channel) 42 D 4204C Net ea. 2.25

Extra Receive Crystal (specify chan-42 D 4205C Replacement Batteries for HA-99

99 D 6258 Net ea. External DC Power Cord for HA-99 99 D 3077 Net

license required, FCC regulation

MODEL HE-210 2-CHANNEL 10-TRANSISTOR RANGE BOOSTTM WALKIE TALKIE

With New Standby Call-Alert

- Two Channels For More Versatility
- . Built-in Range Boost For Greater Range
- 10-Silicon Transistors For Dependable

Complete Portable 2-way communications for everyone, everywhere: Hunting, fishing, boat-ing, construction, warehouse, office and on the farm. Weighs only 16 dunces and easily slips into your pocket. Powerful transmitter with built-in Range Boost circultry gives greater effective range. Incorporates effici-ent, economical Call-Alert system. Just leave walkie talkie in low battery drain, receive position. You will receive an alert tone when you are called, switch to voice and communicate in normal push-to-talk manner. professionally designed black and brushed aluminum metal case. Supplied with antenna. 6 penlight batteries and a pair of crystals for channel 10. Imported. Size: 6%x21/4.x 13/4". Shpg. wt., 21/2 lbs. 99 D 3104L Net ea. 24.95 Replacement Dry-Cell Batteries (6 req.) 99 D 6258 Net ea. Heavy Duty Alkaline Battery (6 req.) Extra Transmit Crystal (specify channel) 42 D 4204C Net 2.25 Extra Receive Crystal (specify channel) 42 D 4205C Net 2.25

No Money Down

MODEL GT-50 500 MILLIWATT 2-CHANNEL 13-TRANSISTOR **CB WALKIE TALKIE**

Range Boost For Greater Range

- 500 Milliwatts For Plenty of Sock!
- · 2-Channel For Greater Versatility
- 13-Transistor Superhet Circuitry
- . Battery Indicator Meter
- Variable Squelch and Automatic Noise Limiting
- Automatic Volume Control
- · Push-Pull Audio Power

Simple to operate, use it for sports or business purposes. Offers 2-channel crystal controlled operation. Self contained automatic noise limiting circuitry, and variable squeich control to reduce background noise. Has range boost coupled with 500 milliwatts output power for added range. Other features include: meter to Indicate condition of batteries, automatic volume control to prevent audio distortion at close range, 2-transistor push-pull audio amplifier. Power is sup-plied by 8 penlight batteries, or, optional 117-Volt AC power pack. Unit is housed in a durable hi-impact plastic case. Supplied with FCC License Application form 505 per Regulation 95, earphone, 44-inch telescopic antenna, batteries and crystals for channel 10. Size: 211/16Wx97/8Hx21/2"D. Imported. Shpg.

99 D 3D73L \$5 monthly Replacement batteries (8 req.) Net ea. Extra Transmit Crystal (specify channel) Extra Receive Crystal (specify channel) 42 D 4205C AC Power Pack 117-Volt AC. Shpg. wt., 1 lb Net 12.95

No Money Down

MODEL HA-711 **3-CHANNEL 1 WATT** HIGH POWER WALKIE TALKIE

- 1 Watt Talk Power!
- 3-Channel Versatility
- 12-Transistor Superhet with AVC
- Variable Squelch and ANL
- Push-Pull Audio Power
- · With Carrying Strap

Efficient 12-transistor, 2-diode circuit for dependable, trouble-free performance, 3-Channel capability for added versatility, 1-watt power for huskier signal strength. Ideal for mobile communications! Sensitive selective superheterodyne circuit and temperature compensating components (thermistors) eliminate frequency fade-out. Equipped with earphone Jack, external antenna jack and telescopic antenna. Supplied with 8 "Z" cell penlight batterles, carrying Complete with FCC License Application Form 505 per Regulation 95, and pair of crystals for channel 11. Size: 3x8x13/4". Shpg. wt., 21/2 lbs. Imported

99 D 3081L \$5 monthly Net ea. 47.95 Replacement Dry Cell Batteries (8 req.) Heavy Duty Alkaline Replacement Batteries (8 req.) 32 D 4886 Net ea. .325 Transmit Crystal (specify channel) 42 D 4204C Net ea. 2.25 Receive Crystal (specify channel) 42 D 4205C Net ea. 2.25 Model HA-711 Modified for Gov't 27.575mc. (specify 27.575mc) 99 D 3093YL \$5 monthly Net Net ea. 57.95 Model HA-711 Modified for C.A.P. 26.62mc 99 D 3092YL \$5 monthly

Prices & Specifications Subject to Change Without Notice.

STEREO SALE SYSTEM SALE



LAFAYETTE 15-Watt Stereo HI-FI System

featuring Lafayette Model LR-300 AM/FM Stereo Receiver



Complete System 149⁹⁵

No Money Down

Plus FREE BONUS

F 767 Stereo Headphones

LAFAYETTE Model LR-300 15 Watt AM-FM Stereo Receiver

2 Lafayette Attractive Minuette 2-Way Shelf Speaker Systems (Oiled Walnut) _____ 29.90

LAFAYETTE F 767 Stereo Headphones

TOTAL 193.63

Complete 30 watt stereo system as above featuring the versatlle LR-300 AM-FM stereo receiver. FM section includes built in multiplex with stereo "search" circuit which introduces a tone pin-pointing stereo stations. AFC for low FM drift and MPX filter rejecting unwanted station noise. Bartype tuning eye operates on both AM and FM. FM sensitivity 3 µV for 20db S/N radio. Response FM 20-20,000 cps ±2db; FM Stereo 50-15,000 cps ±2db. Stereo separation 25db @ 400cps. Amplifier output 7½ watts/channel. Output impedence 8 & 16 ohms switched. Gold anodized aluminum panel, contrasting case.

MODEL AC-66 4 speed automatic recorder changer is made for Lafayette in England. Large 11" turntable, built in stylus brush, complete with famous Pickering PAC-1 Stereo cartridge installed. Intermixes up to 10 records of same speed. Minuette/II Speaker systems each contains 5 x 7" woofer, 2½" tweeter and brilliance control for outstanding sound reproduction. Genuine olled walnut finish on all 4 sides. Also included as a free bonus is famous Lafayette F767 Stereo Headphones. Shpg. wt., 64 lbs.

21 D 9648 WXM \$8 monthly

LAFAYETTE RADIO ELECTRONIC

ELECTRONICS
111 JERICHO TURNPIKE
SYOSSET, L.I., N.Y. 11791

12/3/40 32.60 L2 51 B'HIRPHRIS 3 2322 CRESTMONT AVE CNARLOTTESVILLE VA: 22903

BULK RATE
U.S. Postage
PAID
LOUISVILLE
KENTUCKY
Permit No. 599

POSTMASTER
IF UNDELIVERABLE DO NOT RETURN

BCDEFGH



LAFAYETTE Model LSC-30 30-Watt Solid State Stereo Compact Music System

- Powerful 30-Watt Solid State Lafayette Stereo Control Amplifier
- Famous Garrard Model 50 4-Speed Automatic Stereo Record Changer

Thrill to the magnificance of sterephonic sound. Completely matched stereo Hi Fi music system offers the brilliant performance and unlimited flexibility you get from a deluxe component stereo system in a TRULY SPACE SAVING COMPACT. The main section of the beautiful LSC-30 consists of a powerful Lafayette 30-watt stereo control amplifier, and the famous Garrard Model 50 series 4-speed automatic record changer with the distinguished Pickering V15 series diamond needle stereo cartridge—all mounted in an elegant oiled wainut wood base. The amplifier features a handsome brushed gold anodized aluminum panel with a Stereo headphone jack and six controls: 4 position Input Selector-Mode Switch (Phono Mono, Phono Stereo, Tuner Stereo, Tuner Mono) Loudness-on/off switch, Volume, Bass, Treble, AC Power-on/off switch. Includes 2 auxiliary input Jacks for Left and Right channel enabling you to play an AM/FM/FM stereo tuner or stereo tape deck thru the amplifier. The perfectly matched Lafayette Criterion 30 speaker systems give you full frequency response. You'll marvel at the clarity of the powerful

- 2 Dazzling Lafayette Criterion 30 2-Way Full-Range Speaker System
- Inputs for playing AM/FM/FM Stereo Tuner or Stereo Tape Deck thru Amplifier

Plastic Dust Cover for above, Shpg. wt., 2 lbs.

24 D 2301W_____

__ Net 8.95

www.americanradiohistory.co