MARCH 1983 Vol. 8, No. 3
$2.95 in USA
$3.50 in Canada/£2.10 in U.K.
A McGraw-Hill Publication

BYTE®

the small systems journal

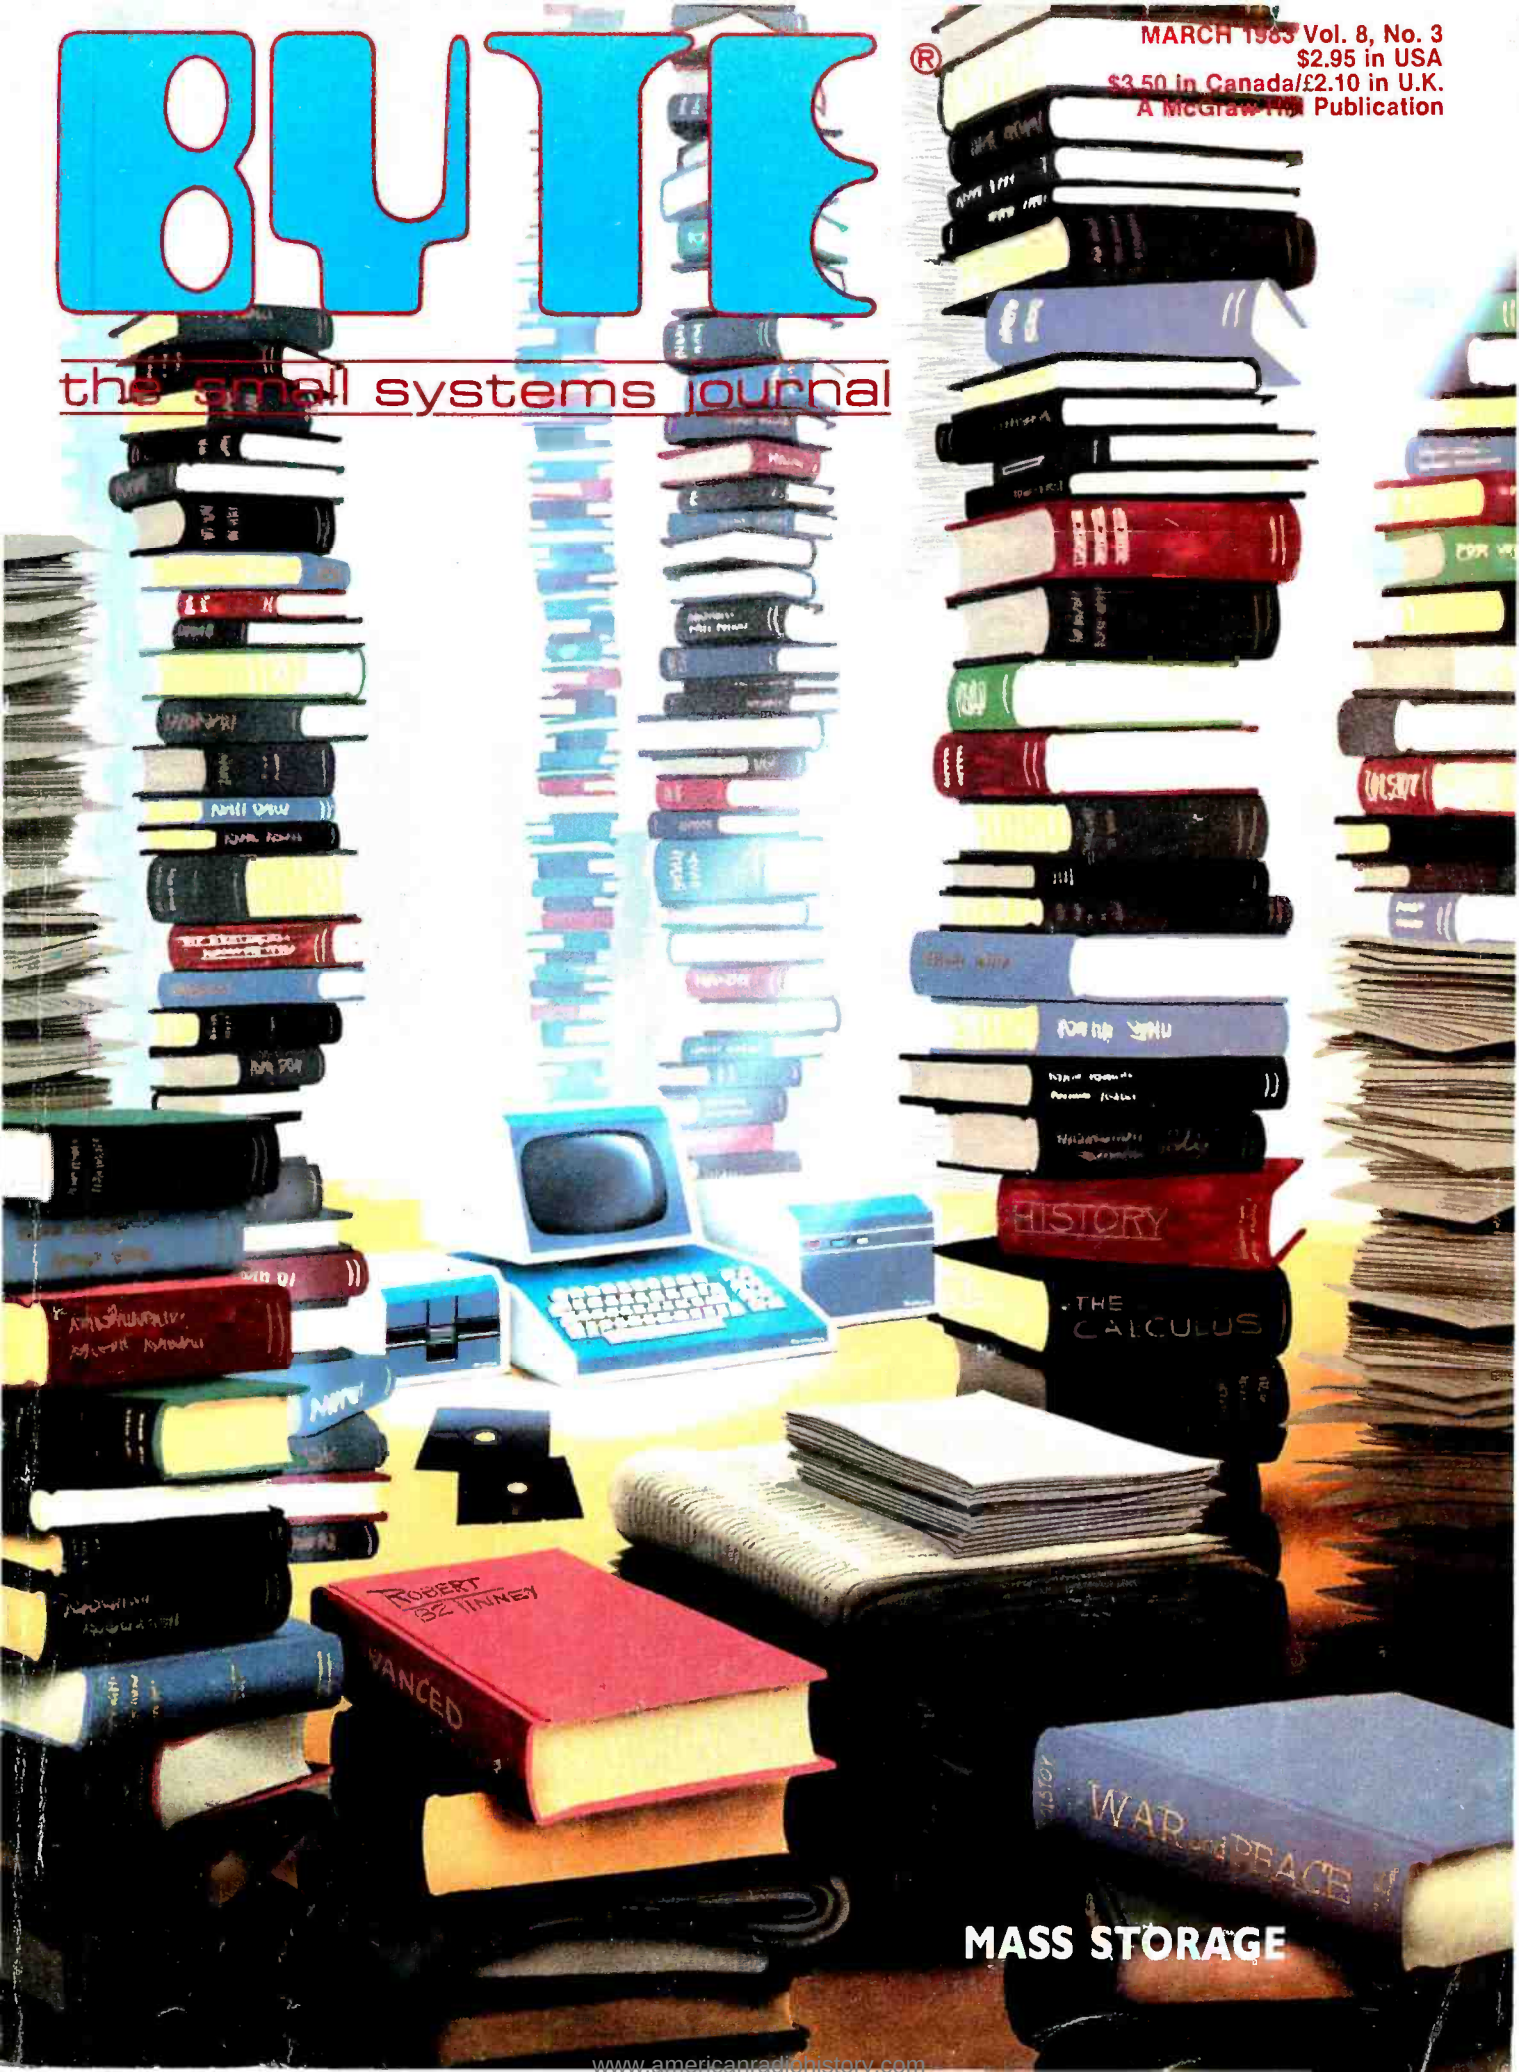

MASS STORAGE

www.americanradiohistory.com

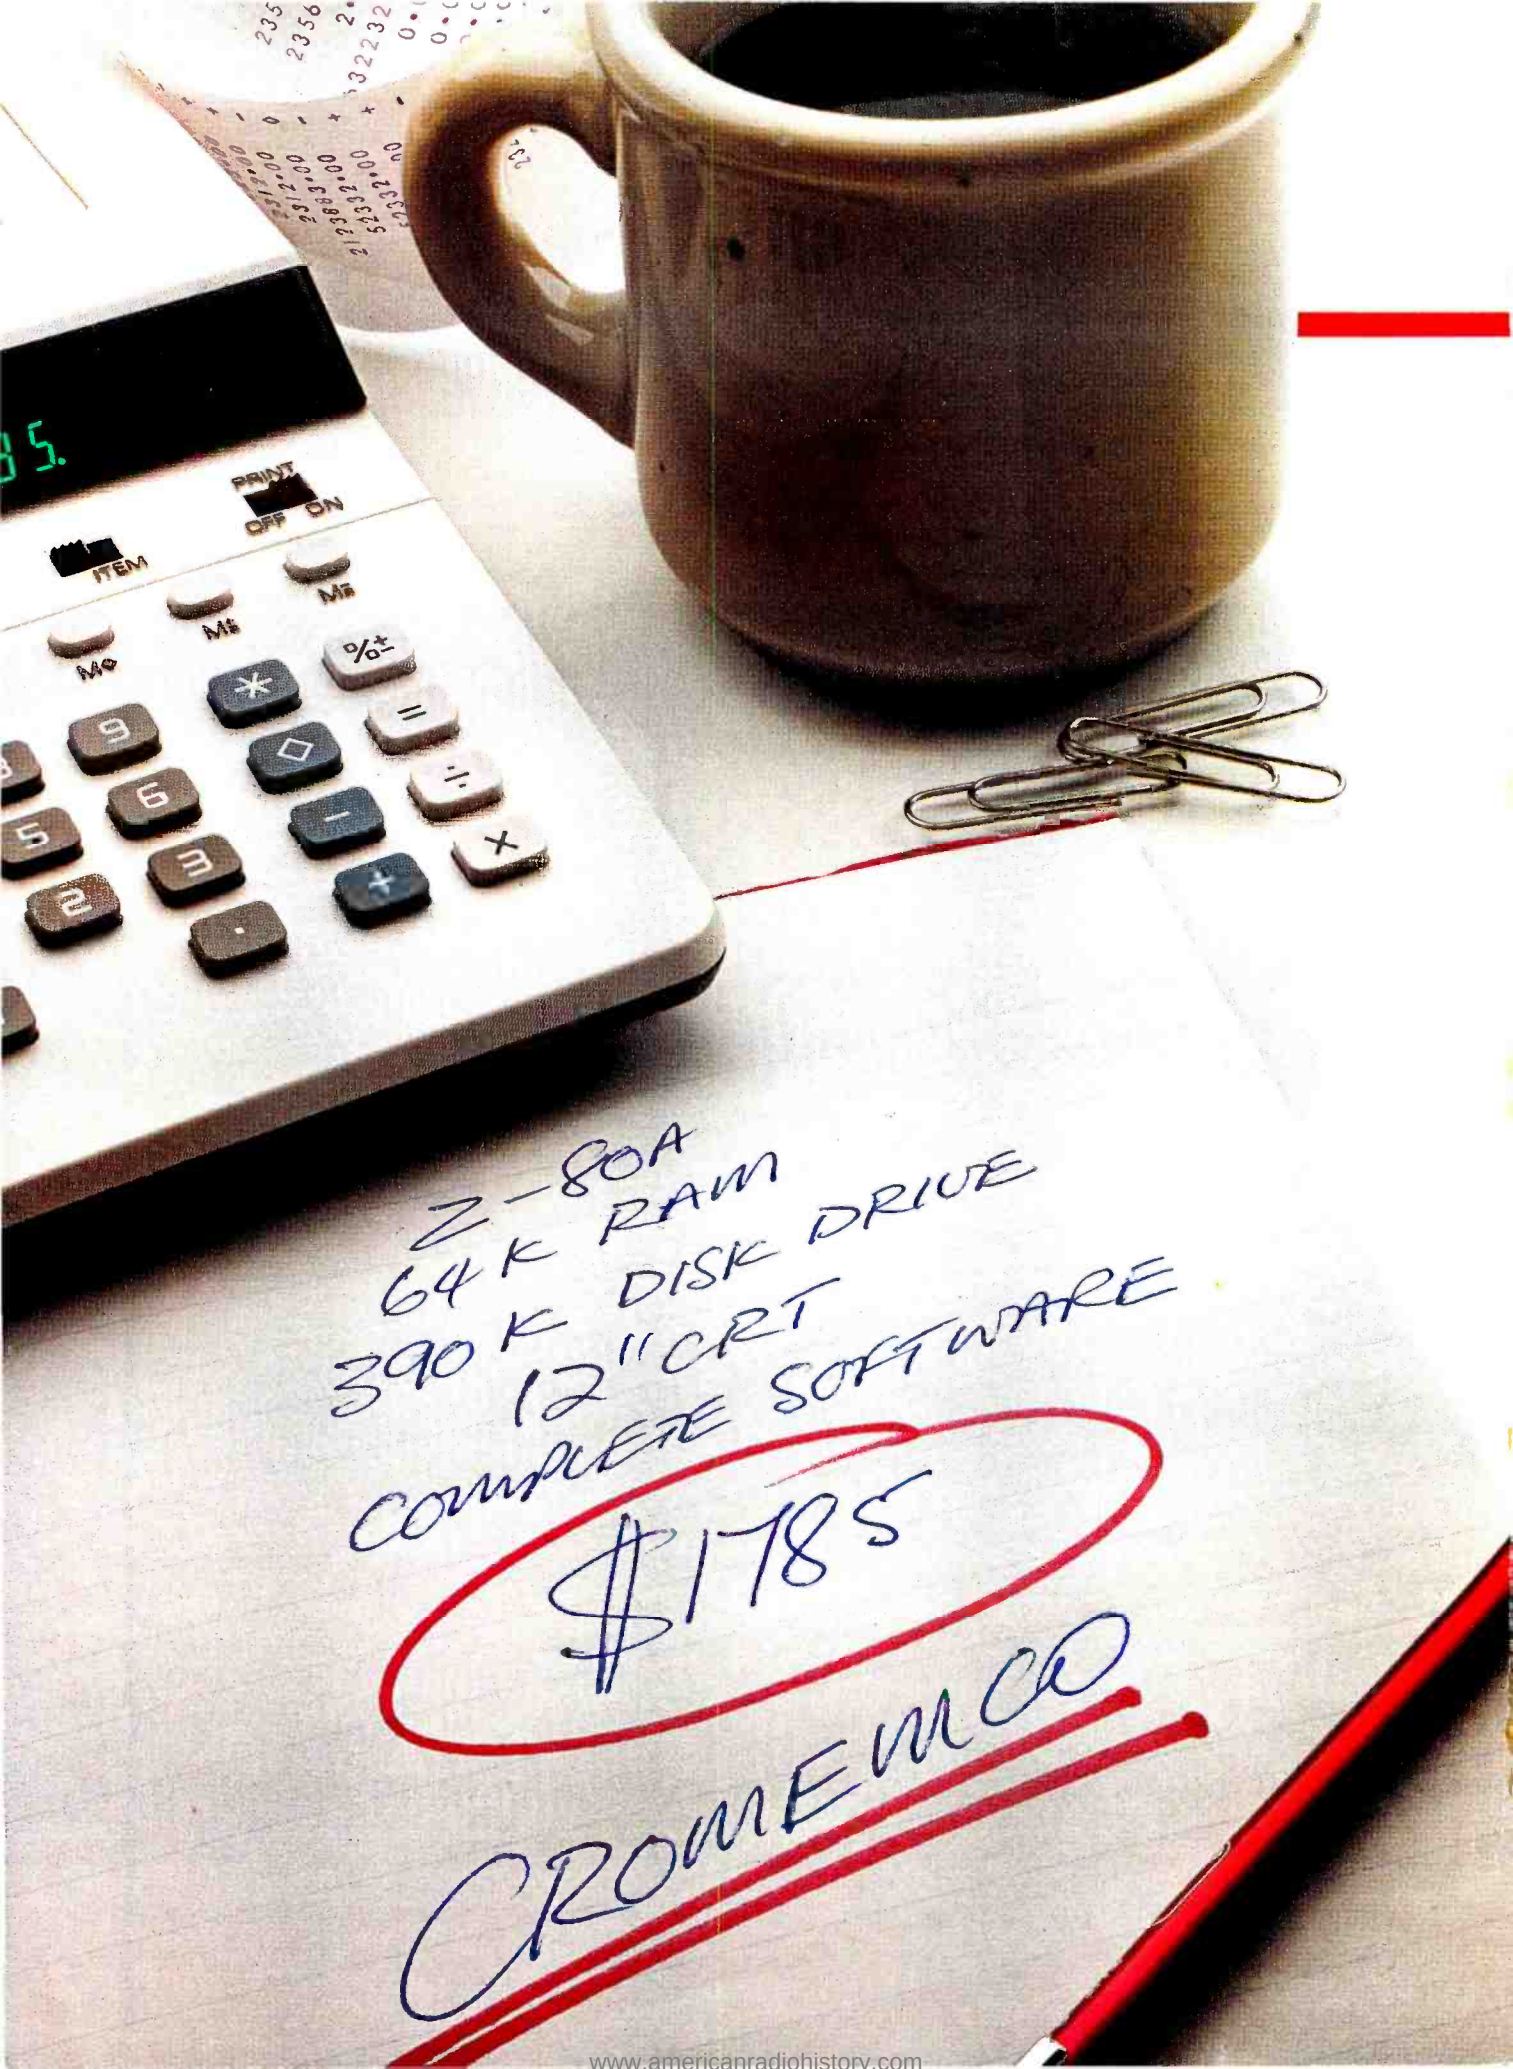

www.americanradiohistory.com

How to buy a computer by the numbers.

Introducing the Cromemco C-10 Personal Computer. Only $1785, including software, and you get more professional features and performance for the price than with any other personal computer on the market. We've got the numbers to prove it.

The C-10 starts with a high-resolution 12" CRT that displays 25 lines with a full 80 characters on each line. Inside is a high-speed Z-80A microprocessor and 64K bytes of on-board memory. Then there's a detached, easy-to-use keyboard and a 5¼" disk drive with an exceptionally large 390K capacity. That's the C-10, and you won't find another ready-to-use personal computer that offers you more.

But hardware can't work alone. That's why every C-10 includes software—word processing, financial spread sheet, investment planning and BASIC. Hard-working, CP/M®-based software that meets your everyday needs. Software that could cost over $1000 somewhere else. FREE with the C-10. There's really nothing else to buy.

But the C-10's numbers tell only part of the story. What they don't say is that Cromemco is already known for some of the most reliable business and scientific computers in the industry. And now for the first time, this technology is available in a personal computer.

One last number. Call **800 538-8157 x929** for the name of your nearest Cromemco dealer, or to request literature. In California call 800 672-3470 x929. Or write Cromemco, Inc., 280 Bernardo Avenue, P.O. Box 7400, Mountain View, CA 94039. In Europe, write Cromemco A/S, Vesterbrogade 1C, 1620 Copenhagen, Denmark.

CP/M® is a registered trademark of Digital Research, Inc.
All Cromemco products are serviced by TRW.

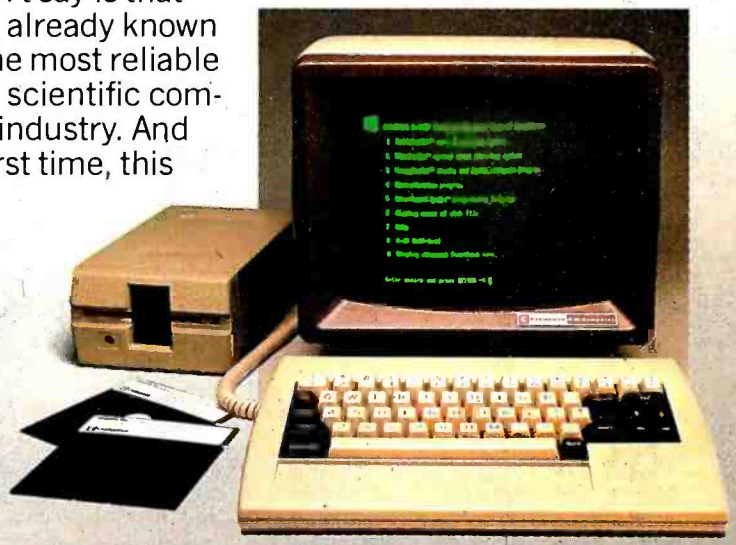

Cromemco

Tomorrow's computers today

Circle 127 on inquiry card.

www.americanradiohistory.com

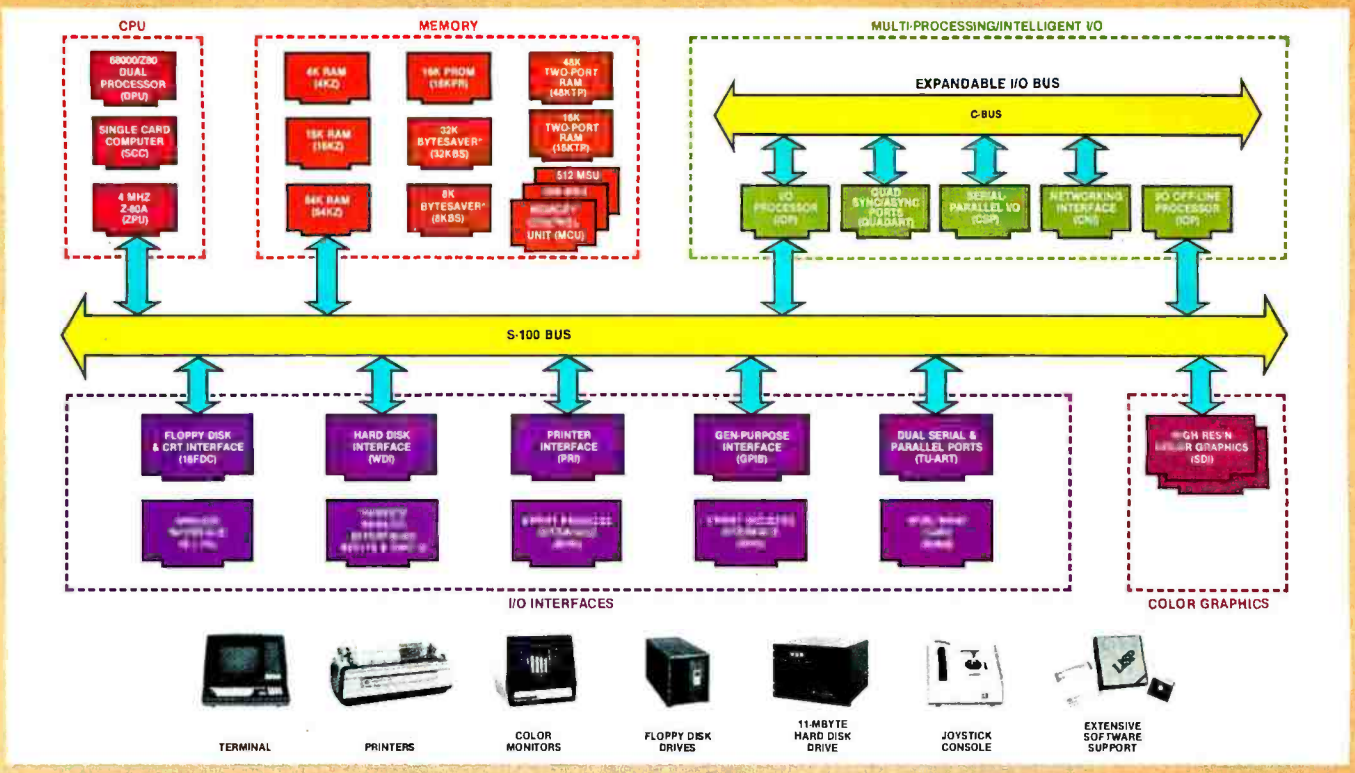

What Cromemco computer card capability can do for you

The above diagram shows in a functional way one of the most complete lines of computer cards in the industry.

Look it over carefully. It could be well worth your while.

These are all cards that plug into our S-100 bus microcomputers.

You can also assemble them into a custom system in convenient Cromemco card cages.

MULTI-PROCESSING AND INTELLIGENT I/O

The range of capabilities and versatility you can draw upon is enormous.

In processors, for example, you have a choice of CPU's including our extremely useful new I/O Processor. This can be used as a satellite processor to do off-line processing, multi-processing, and to form intelligent I/O. It opens the door to a whole new group of applications and tasks. Ask us about it.

HIGH RESOLUTION COLOR GRAPHICS

Again, you can have beautiful high-resolution color graphics with our color graphics interface. You can select from over 4000 colors and have a picture with a resolution at least equal to quality broadcast-TV pictures.

You have an unprecedented selection of memory including our unusual 48K and 16K **two-port** RAMs which allow high-speed color graphics.

LOTS OF STORAGE

These days you often want lots of disk storage. So you can select from our disk controller card which will operate our 5" and 8" floppy disk drives (up to 1.2 megabytes). Or select our WDI interface to operate our 11-megabyte hard disk drives.

POWERFUL SOFTWARE AND PERIPHERAL SUPPORT

There's much more yet you can do with our cards. And, of course, there's an easy way to put them to work in our 8-, 12-, and 21-slot card cages. Our PS8 power supply makes it simple to get the system into operation.

Finally, Cromemco offers you the strongest software support in the industry with languages like FORTRAN, C, COBOL, ASSEMBLER, LISP, BASIC and others. There is also a wide choice from independent vendors.

To top it all off, you can draw from a substantial array of peripherals: terminals, printers, color monitors and disk drives.

There is even more capability than we're able to describe here.

NOW AT HALL-MARK AND KIERULFF

For your convenience Cromemco products are now available at Hall-Mark Electronics and Kierulff Electronics. Contact these national distributors for immediate product delivery.

CROMEMCO COMPUTER CARDS

- **PROCESSORS** — 4 MHz Z-80 A CPU, single card computer, I/O processor • **MEMORY** — up to 64K including special 48K and 16K two-port RAMS and our very well known BYTESAVERS® with PROM programming capability • **HIGH RESOLUTION COLOR GRAPHICS** — our SDI offers up to 754 x 482 pixel resolution. • **GENERAL PURPOSE INTERFACES**—QUADART four-channel serial communications, TU-ART two-channel parallel and two-channel serial, 8PIO 8-port parallel, 4PIO 4-port isolated parallel, D+7A 7-channel D/A and A/D converter, printer interface, floppy disk controller with RS-232 interface and system diagnostics, wire-wrap and extender cards for your development work.

Cromemco™
incorporated
280 BERNARDO AVE., MOUNTAIN VIEW, CA 94040 • (415) 964-7400
Tomorrow's computers today
Circle 128 on Inquiry card.

www.americanradiohistory.com

In The Queue

BYTE Volume 8, Number 3 March 1983

Features

26 Build the ECM-103, an Originate/Answer Modem by Steve Ciarcia / The Texas Instruments TMS99532 forms the heart of a Bell-103-compatible modem.

34 The Enhanced VIC-20, Part 2: Adding a 3K-Byte Memory Board by Joel Swank / Supplement the VIC-20's standard 5K bytes of RAM and eliminate those annoying "out-of-memory" messages.

44 A User's View of COMDEX by Jerry Pournelle / An impressionistic report of one of the largest gatherings of computer dealers and manufacturers.

56 The Promise of Perpendicular Magnetic Recording by Clark E. Johnson Jr. / As the Japanese seem to have realized already, PMR represents the next level of recording technology.

68 New Developments in Floppy Disks by Tom Moran / New advances in floppy-disk-drive technology spurs intense competition.

86 Optical-Memory Media by Edward Rothchild / Some background on how optical disks work, who makes them, and how much data they can hold.

110 Will Removable Hard Disks Replace the Floppy? by Larry Sarisky / Improved data-storage technologies may eventually eliminate floppy disks.

122 The Winchester Odyssey, From Manufacturer to User by Jim Toreson / A look at drives, OEMs, and the cost of doing business.

130 Building a Hard-Disk Interface for an S-100 Bus System, Part 1: Introduction by Andrew C. Cruce and Scott A. Alexander / The first in a series of articles on interfacing a Winchester disk drive to an S-100 bus CP/M microcomputer.

152 NAPLPS: A New Standard for Text and Graphics, Part 2: Basic Features by Jim Fleming / How to encode text and simple graphics elements in a standard and efficient manner.

218 User's Column: Sage in Bloom, Zeke II, CBIOS Traps, Language Debate Continues by Jerry Pournelle / The consummate computer user tackles his new writing machine.

262 A Faster Binary Search by Dr. L. E. Larson / An important technique results in faster-running applications programs and shorter response times.

295 Data Collection with a Microcomputer by Dr. Mahlon G. Kelly / Using a TRS-80 Model I for environmental research saves time and money.

310 Build This Memory, Part 1: How to Construct a Low-Cost Memory with 4116 Memory Devices by Cameron Spitzer / Take advantage of the low price of the 4116-type memory.

331 A Peek Into the IBM PC by Tim Field / An assembly-language program enables an Epson printer to display all 256 characters used by the IBM PC.

389 Keywords in a Fuzzy Context by Thomas A. Smith / CBASIC programs for bibliographic search tell you the degree to which various articles meet your requirements.

418 ROTERP: An Interpretive Language for Robot Control by Gary Liming / High-level languages may help bridge the gap between artificial intelligence and the home experimenter's robot.

436 Using SOUND Arguments for High-Precision RTTY by Scott Persson / How to generate radioteletype audio frequencies from an Atari 800.

453 Binary-Format Number Storage on the Apple II Disk by David Eyes / A machine-language routine to read and write binary data to a text file.

Reviews

190 MP/M II by Stephen Schmitt

247, 248, 251 BYTE Game Grid: Project Nebula by Keith Carlson; Legionnaire by Gregg Williams; Omega Race for the VIC-20 by Stanley J. Wszola

256 Quickcode by Adam B. Green

282 Hayes's Stack Smartmodem by Norman C. McEntire

Nucleus

6 Editorial: The Software Revolution: Where Will We Store All Those Programs?

14 Letters

22 BYTE's Bugs

307, 450 Programming Quickies: Add Dimensions to Your BASIC; Computing Telescope Parameters with the OSI Superboard II

380, 462 System Notes: Circles and Ellipses on the Apple II; Adding a Trace to North Star BASIC

474 Event Queue

478, 486 BYTE's Bits

484 Software Received

487 Ask BYTE

490 Books Received

491 Clubs and Newsletters

492 BYTELINES

497 What's New?

557 Unclassified Ads

558 BOMB, BOMB Results

559 Reader Service

Page 26

Page 44

Page 152

Page 247

www.americanradiohistory.com

Managing Editor
Mark Haas

Technical Editors
Gregg Williams, Senior Editor;
Richard S. Shuford, Curtis P. Feigel,
Arthur Little, Stanley Wszola,
Pamela Clark, Richard Malloy;
Phillip Lemmons, West Coast Editor; Steve
Ciarcia, Mark Dahmke, Consulting Editors;
Jon Swanson, Drafting Editor

Copy Editors
Beverly Cronin, Chief;
Faith Hanson, Warren Williamson, Anthony J.
Lockwood, Hilary Selby Polk, Elizabeth Kepner,
Nancy Hayes, Cathryn Baskin, Tom McMillan;
Margaret Cook, Junior Copy Editor

Assistants
Faith Kluntz, Beverly Jackson, Lisa Jo Stelner

Production
David R. Anderson, Assoc. Director;
Patrice Scribner, Jan Muller, Virginia Reardon;
Sherry McCarthy, Chief Typographer;
Debi Fredericks, Donna Sweeney, Valerie Horn

Advertising
Deborah Porter, Supervisor;
Marion Carlson, Rob Hannings, Vicki
Reynolds, Cathy A. R. Drew, Lisa Wozmak;
Patricia Akerley, Reader Service Coordinator;
Wai Chiu Li, Advertising/Production
Coordinator; Linda J. Sweeney

Circulation
Gregory Spitzfaden, Manager;
Andrew Jackson, Asst. Manager;
Agnes E. Perry, Barbara Varnum, Louise
Menegus, Jennifer Price, Sheila A. Bamford;
James Bingham, Dealer Sales; Deborah J.
Cadwell, Asst: Linda Ryan

Marketing Communications
Horace T. Howland, Director;
Wilbur S. Watson, Coordinator;
Timothy W. Taussig, Graphic Arts Manager;
Michele P. Verville, Research Manager

Controller's Office
Kenneth A. King, Asst. Controller;
Mary E. Fluhr, Acct. & DP Mgr.; Karen
Burgess, Jeanne Cilley, Linda Fluhr, Vicki
Bennett, L. Bradley Browne, Vern Rockwell

Business Manager
Daniel Rodrigues

Traffic
N. Scott Gagnon, Manager;
Scott Jackson, Kathleen Reckart

Receptionist
Jeanann Waters

Publishers
Virginia Londoner, Gordon R. Williamson;
John E. Hayes, Associate Publisher;
Cheryl A. Hurd, Publisher's Assistant

Officers of McGraw-Hill Publications Company: Paul F. McPherson, President; Executive Vice President: Gene W. Simpson; Senior Vice President-Editorial: Ralph R. Schulz; Vice Presidents: Kemp Anderson, Business Systems Development; Shel F. Asen, Manufacturing; Harry L. Brown, Special Markets; James E. Hackett, Controller; Eric B. Herr, Planning and Development; H. John Sweger, Jr., Marketing.

Officers of the Corporation: Harold W. McGraw Jr., Chairman and Chief Executive Officer; Joseph L. Dionne, President and Chief Operating Officer; Robert N. Landes, Senior Vice President and Secretary; Ralph J. Webb, Treasurer.

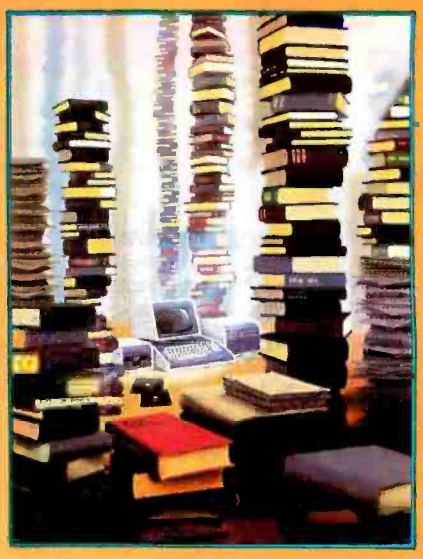

In This Issue

Sophisticated new operating systems and multitasking software promise to alter significantly the way we use personal computers. Because of the large memory requirements of the new software, we're sure to see changes for the better in the nature of external storage devices. New technologies for mass storage will become even more critical as the software revolution continues to escalate. As Robert Tinney's cover suggests, personal computers will need a large quantity of high-speed mass storage to hold all the software and other data that we'll generate. Our theme articles address the latest developments in mass storage. Clark E. Johnson Jr. discusses "The Promise of Perpendicular Magnetic Recording," Tom Moran looks at "New Developments in Floppy Disks," Edward Rothchild writes about "Optical-Memory Media," Larry Sarisky explores the question "Will Removable Hard Disks Replace the Floppy?" Jim Toreson concentrates on "The Winchester Odyssey," and in the first of a three-part series Andrew C. Cruce and Scott A. Alexander discuss "Building a Hard-Disk Interface for an S-100 Bus System." Plus we have part 2 of "NAPLPS, A New Standard for Text and Graphics," the second installment in the VIC-20 series, "Adding a 3K-Byte Memory Board," a review of MP/M II from Digital Research, and BYTE's Game Grid. Steve Ciarcia tells you how to "Build the ECM-103, an Originate/Answer Modem," and more.

BYTE is published monthly by McGraw-Hill, Inc., with offices at 70 Main St, Peterborough NH 03458, phone (603) 924-9281. Office hours: Mon–Thur 8:30 AM – 4:30 PM, Friday 8:30 AM – Noon, Eastern Time. Address subscriptions, change of address, USPS Form 3579, and fulfillment questions to BYTE Subscriptions, POB 590, Martinsville NJ 08836. Second class postage paid at Peterborough, N.H. 03458 and additional mailing offices. USPS Publication No. 528890 (ISSN 0360-5280). Postage Paid at Winnipeg, Manitoba. Registration number 9321. Subscriptions are $21 for one year, $38 for two years, and $55 for three years in the USA and its possessions. In Canada and Mexico, $23 for one year, $42 for two years, $61 for three years. $53 for one year air delivery to Europe. $37 surface delivery elsewhere. Air delivery to selected areas at additional rates upon request. Single copy price is $2.95 in the USA and its possessions. $3.50 in Canada and Mexico, $4.50 in Europe, and $5.00 elsewhere. Foreign subscriptions and sales should be remitted in United States funds drawn on a US bank. Printed in United States of America.

Address all editorial correspondence to the editor at BYTE, POB 372, Hancock NH 03449. Unacceptable manuscripts will be returned if accompanied by sufficient first class postage. Not responsible for lost manuscripts or photos. Opinions expressed by the authors are not necessarily those of BYTE. Entire contents copyright © 1983 by BYTE Publications Inc. All rights reserved. Where necessary, permission is granted by the copyright owner for libraries and others registered with the Copyright Clearance Center (CCC) to photocopy any article herein for the base fee of $1.00 per copy of the article or item plus 25 cents per page. Payment should be sent directly to the CCC, 21 Congress St, Salem MA 01970. Copying done for other than personal or internal reference use without the permission of McGraw-Hill is prohibited. Requests for special permission or bulk orders should be addressed to the publisher.

BYTE® is available in microform from University Microfilms International, 300 N Zeeb Rd, Dept PR, Ann Arbor MI 48106 USA or 18 Bedford Row, Dept PR, London WC1R 4EJ England.

Subscription questions or problems should be addressed to:
BYTE Subscriber Service
P.O. Box 328
Hancock, NH 03449

www.americanradiohistory.com

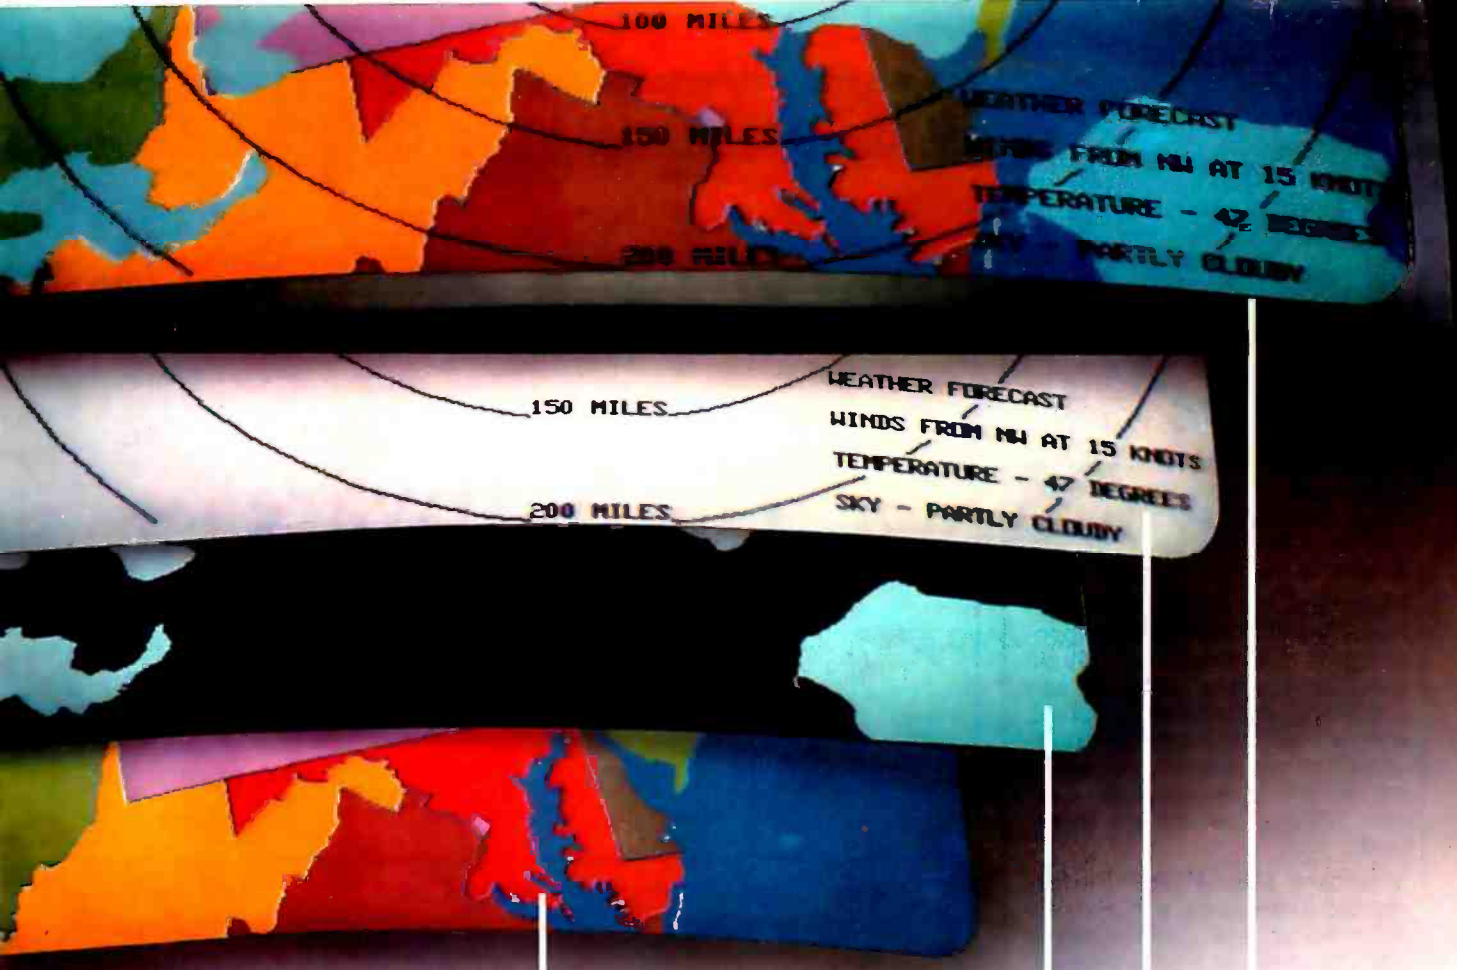

Add Multi-Transparency Color Graphics to Your

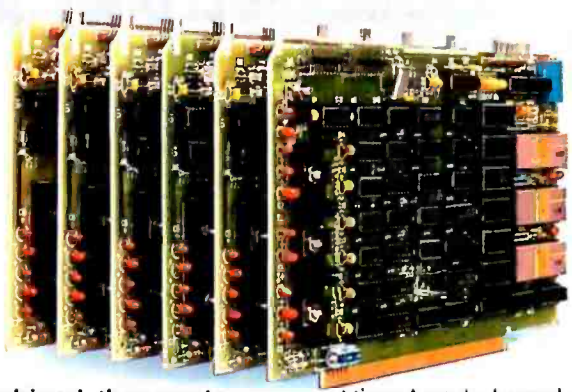

The system builder's best choice for color graphics is a CS5000 color system from SCION. Its basic component is MicroAngelo®, the single board graphics display computer that has revolutionized monochrome display capability with low cost 512x480 pixel graphics resolution and 40 line by 85 character text capacity. When MicroAngelo boards are combined, they create high resolution color graphics that have a unique advantage. The displayed image is a combination of transparencies. So you can add, modify or delete images by transparency rather than as an entire image.

SCION's Series CS5000 builds an image with up to 8 bit planes, each generated by a MicroAngelo board. You select the assignment of those bit planes to transparencies. Each transparency can display 2^n-1 colors where n is the number of bit planes it uses... 2 bit planes would make a three color transparency, 8 bit planes would make a 255 color transparency. Once each transparency has been defined, your host can work with it independently, generating and modifying its graphics and text without interacting with the others. The independent transparencies are combined by the Color Mixer board which also assigns one of 16.8 million possible colors to each color of each transparency.

Your computer talks to the SCION Color System in SCREENWARE™, SCION's high level display firmware language. SCREENWARE commands are used by the computer in each MicroAngelo bit plane to generate graphics and text primitives. User interface is made simple with prompted system set-up using SCION's ColorPak. MicroAngelo based color graphics systems are easy to use. Just plug the boards into your Multibus or S-100 host. Or use the freestanding work station configuration with its RS-232 interface. In each case, you get high resolution color graphics for such a low price you can't afford to design your own.

Think SCION for your graphics display needs. Think MicroAngelo. Call us at (703) 476-6100.

System shown is a Model CS5050S.
*A trademark of Intel Corp.

SCION

if the image is important.

12310 Pinecrest Rd./Reston, VA 22091
(703) 476-6100 TWX: 710-833-0684

For S-100 circle 476 on inquiry card, For Multibus circle 477 on inquiry card.

www.americanradiohistory.com

Circle 146 on Inquiry card.

MILESTONE®
WHEN TIME IS MONEY

As a project manager, you know the value of meticulous planning. Oversights and miscalculations can cost you crucial time and money.

Milestone is a project management and time scheduling program. It is a powerful "critical path" program for planning and analyzing virtually any project, from a cost estimate for a construction project to a schedule for installing a computer system. The applications are unlimited.

Milestone uses PERT, Performance Evaluation and Review Technique, and CPM, Critical Path Method, to plan a project, yet Milestone is one of the easiest software packages to use.

The Milestone user can change a variable and instantly Milestone will display the effect on the entire project. For instance, the estimated completion date of a particular time-crucial task may be changed. All scheduling, manpower costs and associated reports will be re-tabulated.

TIME IS MONEY. SAVE BOTH WITH MILESTONE.

The price is $295. CP/M® and CP/M-86™ versions require 64K and 128K RAM respectively. Manual alone is $30.

For more information see your local computer dealer or contact Digital Marketing directly.

SOFTWARE
SOFTWARE
DIGITAL MARKETING
DIGITAL MARKETING™

DIGITAL MARKETING CORPORATION

2670 CHERRY LANE • WALNUT CREEK • CALIFORNIA • 94596
(415) 938-2880 • Telex 17-1852 (DIGMKTG WNCK)

Dealer inquiries invited. Dealers outside California call (800) 447-4700. Inside California call (415) 938-2683.

Milestone is a registered trademark of Organic Software.
CP/M is a registered trademark of Digital Research, Inc.
CP/M-86 is a trademark of Digital Research, Inc.

Editorial

The Software Revolution

Where Will We Store All Those Programs?

Phil Lemmons, West Coast Editor

Two advances in hardware—the 16-bit microprocessor with its great memory-addressing range and the 64K-bit dynamic RAM (random-access, read/write memory)—have paved the way for a software revolution. The Lisa software from Apple, and soon the Visi On operating environment from Visicorp and a new generation of software from Microsoft, will transform the way we use computers and the way we think about our jobs. But just as hardware advances made possible a revolution in software, the exciting new software demands an improvement in hardware, specifically, in mass storage. The memory-intensive operating systems and integrated applications programs that are emerging today will make unprecedented demands on the mass storage of personal computers. Not only will personal computers need a lot of mass storage to run the new software effectively, they will also need high-speed mass storage that is faster than today's floppy disks.

You might think that the current low prices of RAM would reduce the need for speed in mass storage. The computer could read the operating system and applications program from floppy disk into RAM once, at the beginning of a session, and thereafter execution would proceed at the lightning speed of RAM itself. But consider how *big* the new operating systems and applications programs will be. Even if new personal computers have 256K bytes of RAM, they will not be able to accommodate at one time both a desktop-manager operating system and more than one sophisticated applications program. The resident portion of Lisa's operating system approaches a quarter of a megabyte, and its sophisticated applications programs are almost as large. Even though Lisa has a half megabyte of RAM as standard equipment, the operating system has to use virtual memory. Virtual memory means treating part of mass storage as if it is part of RAM. Since a major limiting factor in the speed of software that uses virtual memory is the speed of input/output of mass-storage devices, systems like Lisa will require high-speed mass storage for effective operation. Otherwise we will see computer users tapping their feet while waiting for their expensive personal computers to read in the next chunk of beautiful software.

Circle 342 on Inquiry card.

www.americanradiohistory.com

We've Got More Than A Fond Attachment For Your ATARI

We've Got A Disk Drive For $488.

Percom Data Corporation believes your Atari* home computer is more than just fun and games. We believe you should be able to get a single-density, floppy-disk-system for your Atari 400 or 800 at a price that will take you into the future without knocking you into the next galaxy.

Percom Data has been manufacturing disk-drive systems, and other accessories for personal computers since the mid-1970's and is the industry standard to follow when it comes to data separation and system compatibility.

The Percom Data AT-88 combines Percom Data quality and reliability at a price that is not a budget-buster.

The Percom Data AT-88 offers 88 Kbytes (formatted) in single-density, with plug-in ease of attachment to your Atari. The AT-88 has integral power supply, "no-patch" to Atari DOS and critical constant speed regulation.

Take advantage of this low introductory price of $488 by calling Percom Data now to get more information, or the name of an authorized dealer nearby. Call toll-free
1-800-527-1222

PERCOM DATA
CORPORATION

Expanding Your Peripheral Vision

DRIVES • NETWORKS • SOFTWARE

11220 Pagemill Road Dallas, Texas 75243 (214) 340-7081
1-800-527-1222

*Atari 400/800 is a trademark of ATARI, INC.

www.americanradiohistory.com

Hard Disks for the Masses?

The point of this argument is not to debunk the new software. On the contrary: the revolution in software can extend the power of computing to millions of people as well as making life more enjoyable for current microcomputer users. If the software revolution is to make microcomputing a true mass phenomenon, however, there must first be a reduction in the price of high-speed mass-storage hardware. Lower prices for Winchester hard disks would be an ideal solution. Making hard disks standard equipment on 16-bit computers would help bring down the cost of the disk drive somewhat. And because hard disks operate up to 20 times faster than floppy disks, the delays required to read in software would cease to be a problem. In the office, hard disks will no doubt be the standard answer to the new software's need for high-speed mass storage.

But hard disks are likely to remain too expensive to become standard equipment outside the office. Prices have plunged in the last three years, but hard-disk systems still cost at least $1500. More often the prices are closer to $2500. (See "The Winchester Odyssey," page 122, about why hard disks that cost $600 in quantity at the factory cost much more by the time they're integrated into hard-disk systems.) The mechanics required to rotate the disk at very high speed while the magnetic head floats microns above the disk are not simple and the manufacturing process cannot get much less expensive.

The only remaining area for significant cost savings in hard disks is the controller. Several companies are reducing Winchester controllers to single chips or small chip sets. Western Digital Corporation has a series of Winchester controller boards based on its own LSI (large-scale-integration) chips. The Western Digital WD1001 board cost $245 last year. The WD1002 cost $195 at the end of 1982. The company plans to introduce the WD1003 at $175 this summer, and the WD1004 at $150 in the fall. In other words, Western Digital's advances can squeeze about $100 out of the cost of hard-disk systems by the end of the year.

National Semiconductor will introduce a four-chip Winchester-disk controller this summer. The DP8464 disk pulse detector, the DP8460 MFM data separator, the DP8462 MFM data encoder, and the DP8466 disk data controller together make up a sophisticated, high-performance controller capable of handling multiuser and multitasking operations. Single-user systems will not require the entire chip set; in fact, the National Semiconductor chips needed for a hard-disk controller in a typical personal computer will cost less than $100.

Adaptec, a start-up firm (1625 McCarthy Blvd., Milpitas, CA 95035), also is offering its own Winchester controller chip set and boards based on the chips. Adaptec's products are based on five chips in the ACS-500 series. The complete chip set required for high-performance, multiuser and multitasking systems costs $190 in quantity. The Adaptec product of most interest to personal computer users is the single-chip controller called the Winchester Controller Chip. This chip costs only $75 in large quantities. NEC, too, has announced a single-chip Winchester controller at less than $100.

As with the Western Digital boards, these other LSI controllers will reduce Winchester prices for single-user systems by about $100. That is a significant saving, but even a saving of $200 would probably not induce manufacturers of personal computers to make Winchester disks standard equipment. Replacing one floppy disk with a Winchester disk would add at least $1000 to a computer's list price, and probably more. Manufacturers seem reluctant to raise list prices that much. And yet, keeping the hard disk optional prevents the kind of volume savings that would come with making the hard disk standard equipment. Thus, hard disks remain more expensive than they really have to be and add $1500 to $2500 to system costs.

If hard disks will remain too expensive to host the software revolution in personal computers, where will we put the friendly new operating systems and applications programs?

Solving a Read-Only Problem

Businesses and individuals who need to write and read large amounts of data at high speed will have no choice but to use hard disks. But we don't need to write and rewrite the new operating systems and applications programs; we only need to read them into RAM time and again every day and to update them on disk every few months. Most people's requirements for writing data are not so great as to require hard disks. Few of us generate enough data each day to overflow an ordinary floppy, much less the new high-capacity floppies (see "New Developments in Floppy Disks," page 68).

Is an inexpensive form of ROM (read-only memory) on the horizon? NEC's new 1-megabit semiconductor ROMs are remarkable bargains at something more than $40 per megabit, but the real requirements of the new operating systems and a set of applications programs may approach a megabyte. That would require more than $320 worth of ROMs. Moreover, software updates and bug-fixes would pose major problems. Software houses, computer manufacturers, and computer dealers could not be expected to swallow the cost of replacing the ROMs. Erasable and reprogrammable ROMs and the equipment needed to program them would be prohibitively expensive.

The Laser Card from Drexler

Fortunately, a new form of read-only mass storage, the Drexon Laser Card (from Drexler Technology Corp., 2557 Charleston Rd., Mountain View, CA 94043) is just coming to market (see photo 1). The size of a credit card, the Laser Card has a storage capacity of 2 megabytes. With 1 megabit or 125K bytes prerecorded, Laser Cards

www.americanradiohistory.com

DISCOVER THE DYSAN DIFFERENCE

Dysan Software Duplication:

It's your name on the package label. And your company's reputation on the line. Whether your program retails for $40.00 or $400.00, or is for company internal distribution, the cost of duplicating it on diskettes is just a fraction of the value of your product. Doesn't it make sense to protect the time, money and talent invested in your software with the finest and most complete software duplication services available?

Quality Software Deserves the Quality Media.

Dysan's software duplication services are unsurpassed for fidelity of reproduction. Not only is your program copied unerringly onto the finest media made—the Dysan diskette—but it's also copied on proprietary equipment manufactured by Dysan, exclusively for Dysan. Plus Dysan offers you the widest variety of support services available—from software protection to serialization and packaging.

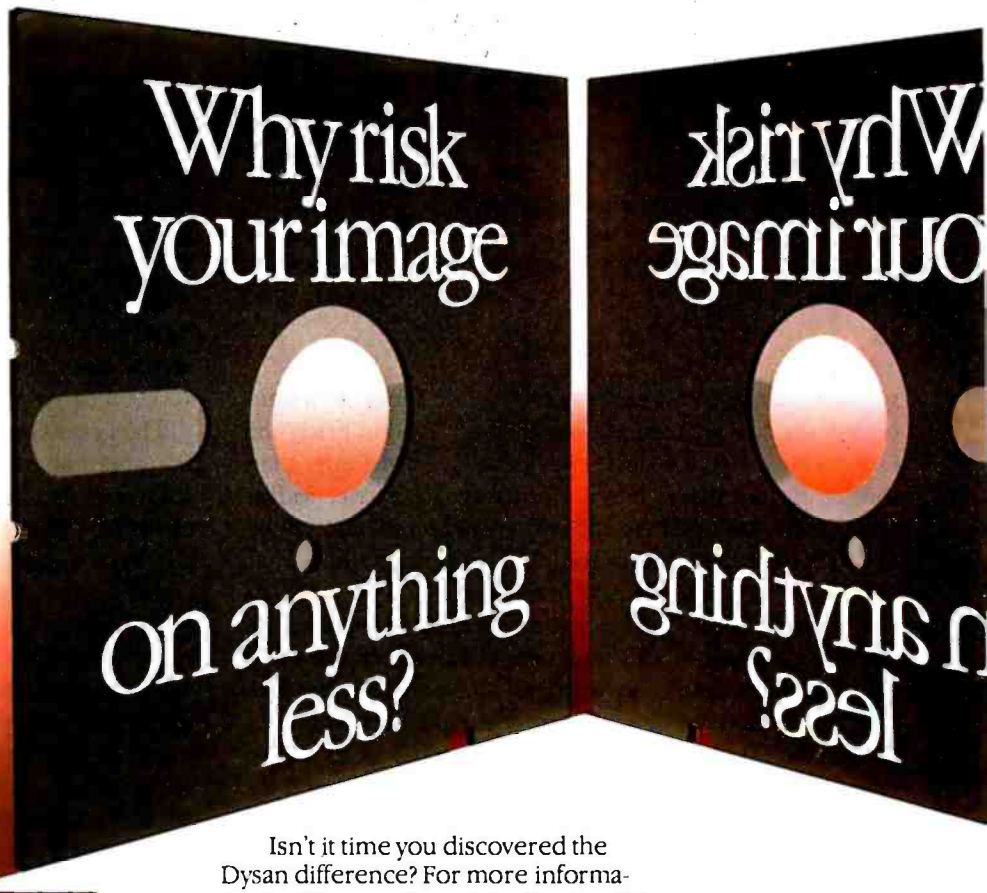

Isn't it time you discovered the Dysan difference? For more information on Dysan software duplication, fill out and return this coupon today, or call (800) 551-9000.

Dysan CORPORATION

Circle 159 on Inquiry card.

Dysan Software Duplication Division
5201 Patrick Henry Drive
Santa Clara, CA 95050
(800) 551-9000
(408) 988-3472

Please send me more details on Dysan's Software Duplication Services.

Name: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: ( ) _____

www.americanradiohistory.com

Photo 1: *The Drexon Laser Card. This card can store 2 million bytes of data. The small object resting on the card's recording stripe is the semiconductor diode laser required to write data on the stripe. Either a diode laser or a photodetector array can read the data.*

will cost about $1.50 each; with the full 2 megabytes encoded, the cost will remain less than $6. At that price, the Laser Card will be less expensive to distribute than today's floppy disks. It will not present a barrier to frequent software updates. Indeed, software houses will be able to distribute updates in the same mass mailings that banks use to distribute new credit cards.

The name Laser Card is somewhat frightening because lasers are expensive. But lasers are required only to write data on these cards; an array of inexpensive photodetectors can read the data. In fact, the equipment required to read data from a Laser Card at a rate of 125K bytes per second will cost less than $100. The read rate has no intrinsic limit. To increase the rate to that of hard disks, manufacturers can just add more of the inexpensive photodetectors to the array. The cost of laser writing equipment, estimated at about $500, will not deter computer manufacturers or software houses. For very high-volume high-speed writing operations, such as printing 100,000 Laser Card copies of a piece of software, photolithographic processes will be more economical than lasers.

New peripheral technology usually requires expensive redesign of existing equipment, but the Laser Card seems to escape that problem. The reading equipment is compact and will not require significant changes in the housings of today's personal computers. The most conspicuous sign of the Laser Card's presence, in fact, will be a slot in the side or the front of the computer. The size of the slot is like that found on automatic teller machines.

The Laser Card has another feature that will appeal to software houses and program authors: every vendor can encode optical data at a different level of reflectivity. For this and other reasons, software piracy will be more difficult with Laser Cards than it is with magnetic storage.

One of the features that will appeal most to manufacturers and computer users is that Laser Cards do not wear out as floppy disks do; in fact, Laser Cards show no signs of wear at all. Futhermore, Drexon coatings—the recording material used on the Laser Cards—are resistant to damage from bending and are invulnerable to magnetic hazards. (For more information about the Laser Card and the nature of its recording medium, see "Optical Memory Media," page 86.) The reading equipment itself is expected to require much less maintenance than a floppy-disk drive does.

To encourage use of the Laser Card, Drexler is licensing the technology needed to read and write the cards. For a one-time fee, companies can purchase information on read/write equipment design, gain the use of patents for read/write equipment without paying royalties, and acquire the right to distribute Laser Cards to end users. Toshiba is the first announced licensee. Others may be announced by the cover date of this issue. Drexler intends to be the principal supplier of the cards but will license a second manufacturer. Drexler is now capable of making 100,000 cards per day.

The Laser Card has many possible applications besides the one that now looks most important: serving as the read-only medium for large operating systems and applications programs that comprise the software revolution. Dictionaries and other large reference books could be encoded compactly, especially when the Laser Card's capacity goes up to 10 megabytes, as Drexler expects. The compactness and reliability of the card and the reading equipment also seem to suit the Laser Card ideally for use in portable computers. When computer users leave their home or office, they will not have to leave behind the software to which they're sure to become addicted. With all the software in a Laser Card, the need for read/write/rewrite data storage in the portable computer may be reduced to a single microfloppy disk or bubble-memory cartridge. While Laser Cards will find many uses in the office, they are likely to coexist there with hard disks and floppy disks. The read/write capabilities of magnetic storage will remain indispensable for most business applications.

The coming availability of inexpensive 10-megabyte read-only mass storage, in the form of the Laser Card, will no doubt broaden the application of the microcomputer in ways unforeseen. One of the delights of watching the microcomputer industry is that each round of progress feeds on the next in a combination of synergism and serendipity. Just as 16-bit microprocessors and 64K-bit (8 of these chips make up 64K bytes) RAMs made possible today's software revolution, and the software revolution demands new mass-storage technology and finds the Laser Card ready, so this new mass-storage technology will feed the software revolution. What software will this new technology make possible? What new hardware will that new software demand? Something is bound to turn up. ■

Circle 224 on Inquiry card. ⟶

www.americanradiohistory.com

THE PERSONABLE BUSINESS COMPUTER™

Intertec announces what may well be the industry's first *personable* microcomputer–SuperBrain II.™

What's a *personable* computer? It's a computer with business application versatility at personal computer prices. It's a computer powerful enough to tackle even your toughest business jobs, yet at a price that won't put you out of business. But most importantly, it's a computer you can put to use right out of the box. That's because SuperBrain II™ boasts the industry standard CP/M* operating software. So whatever your business application, SuperBrain II can handle it. There are literally hundreds of ready-to-run business applications available "off-the-shelf."

Unlike many microcomputers, the SuperBrain II™ is time-tested and field-proven. It's built and backed by a company that's been around as long as the industry itself. A company you can count on for product support and customer satisfaction.

*Registered trademark of Digital Research.
†Microsoft is a trademark of Microsoft Corporation.

STANDARD FEATURES

- Dual 5¼" disk drives
- 350K/750K/1.5 MB disk capacities
- 64K RAM
- Twin Z80A microprocessors
- An easy-to-read 12-inch non-glare screen
- An 18-key numeric keypad
- 10 MB disk expansion capability (Optional)
- Microsoft† Basic

When you think about it–price, performance, and the reputation of the manufacturer–it's no wonder so many discriminating microcomputer users have become "personal" friends with our new SuperBrain II™–the industry's one and only *personable* desktop microcomputer.

INTERTEC DATA SYSTEMS®

CORPORATE HEADQUARTERS: 2300 BROAD RIVER ROAD • COLUMBIA, SOUTH CAROLINA 29210 • (803) 798-9100 • TWX 810-666-2115

www.americanradiohistory.com

Microstuff's
CROSSTALK
$119

ASHTON TATE
dBASE II $529.00
BOTTOM LINE STRATEGIST 279.00

C. ITOH
PROWRITER PARALLEL $489.00
PROWRITER SERIAL 639.00
F-10 55 ..... 1799.00
F-10 PARALLEL 1399.00
F-10 SERIAL 1449.00
GRAPPLER INTERFACE 140.50
PROWRITER II 789.00
TRACTOR FOR F10 ..... 229.00

CALIFORNIA COMPUTER SYSTEMS
ASYNCHRONOUS INTERFACE .. $129.00
SYNCHRONOUS INTERFACE 149.00
CALENDAR CLOCK 105.00
RS232 INTERFACE 124.00
PROGRAMMABLE TIMER (FOR APPLE) 99.00

COMSHARE TARGET MARKETING
PLANNER CALC $79.00
TARGET FINANCIAL MODELING .. 249.00

CONTINENTAL SOFTWARE
HOME ACCOUNTANT FOR APPLE $69.00
HOME ACCOUNTANT FOR IBM ... 129.00

DICTRONICS, INC.
RANDOM HS. ELE. THESAURUS. $129.00
PROOF READER 50.00

EAGLE
MONEY DECISIONS $119.00

FORCE II
MATH* $99.00

FOX & GELLER
dUTIL $68.00
QUICKSCREEN FOR dBASE II 129.00
QUICKCODE FOR dBASE II 249.00

INTEGRAL DATA SYSTEMS
IDS MICROPRISM 480 PRINTER . $599.00
IDS PRISM 132 PRINTER 1199.00
IDS PRISM 80 PRINTER 879.00

INTERACTIVE STRUCTURES
PKASSO 145.00

INNOVATIVE SOFTWARE, INC.
TIM III $369.00
GRAPHMAGIC 69.00
MATHEMAGIC 79.00

INFORMATION UNLIMITED SYSTEMS
EASYFILER $349.00
EASYSPELLER 159.00
EASYWRITER II 279.00

MAXELL
FD-1 or FH-1-32 8" SINGLE SIDED $41.50
FD-2 8" DOUBLE SIDED 48.95
MD-1 or MH-1 5¼" SINGLE SIDED 31.25
MD-2 or MH-2 5¼" DOUBLE SIDED ... 47.10

MICROPRO
CALCSTAR $99.00
DATASTAR 194.00
DATASTAR 199.00
MAILMERGE 139.00
SPELLSTAR 174.00
SUPERSORT I 174.00
SUPERSORT II 174.00
WORDSTAR 279.00
WORDSTAR/MAILMERGE 369.00
WORDSTAR TRAINING GUIDE 11.25

MICROSOFT
128K RAM FOR IBM PC $599.00
ALDS 105.00
BASIC 80 COMPILER 299.00
BASIC 80 INTERPRETER 279.00
BASIC COMPILER FOR APPLE II .. 315.00
128K RAMCARD 599.00
192K RAMCARD 699.00
256K RAMCARD 799.00
64K RAMCARD 399.00
64K RAMCHIPS 175.00
TIME MANAGER 119.00
TYPING TUTOR 23.00
MICROSOFT Z80 PREMIUM PACK 619.75
MICROSOFT Z80 SOFTCARD 279.00
muLISP/muSTAR 169.00
MULTIPLAN 229.00
muSIMP/muMATH 199.00
TASC APPLESOFT COMPILER 149.00

NORTH AMERICAN BUSINESS SYSTEMS
THE ANSWER $249.00

NEC
NEC3550LQP $2149.00

OASIS
WORDPLUS $149.00

PEACHTREE
ACCOUNTS PAYABLE $375.00
ACCOUNTS RECEIVABLE 375.00
GENERAL LEDGER 375.00
INVENTORY 375.00
PAYROLL 187.50
SALES INVOICING 375.00

PERFECT SOFTWARE
PERFECT CALC $139.00
PERFECT FILER 279.00
PERFECT SPELLER 139.00
PERFECT WRITER 239.00

QUADRAM
128K MEMORY EXPANSION $380.00
192K MEMORY EXPANSION 475.00
64K MEMORY EXPANSION 280.00
64K MEMORY UPGRADE 129.00
DUAL PORT EXPANSION KIT 49.00
MICROFAZERS ALL MODELS ..... CALL!
MICROFAZER POWER SUPPLY 17.00
QUADBOARD 64K 499.00
QUADBOARD 128K 649.00
QUADBOARD 192K 749.00
QUADBOARD 256K 829.00

MICROHOUSE™
CALL TOLL-FREE
1-800-523-9511
IN PENNSYLVANIA
1-215-868-8219

Micropro's
INFOSTAR
$279

RANA
CONTROLLER FOR ELITE I $99.00
RANA ELITE I 379.00
RANA ELITE II 559.00
RANA ELITE III 729.00

SMITH-CORONA
SMITH-CORONA TP-1 ..... $599.00

SORCIM
PASCAL M $131.25
SUPERCALC BY SORCIM 209.00
SPELLGUARD 189.00

SUPERSOFT
ADA $269.00
DIAGNOSTICS I 65.50
DIAGNOSTICS II 84.00
DISK DOCTOR BY SUPERSOFT 84.00
FORTRAN 279.00
PESONAL DATABASE 99.00
SCRATCHPAD 259.00
STACKWORKS FORTH 149.00
STATSGRAPHS 169.00
C COMPILER 175.00
SSS FORTRAN IV 218.75
SUPER M LIST 65.00
TERM I 131.00
TERM II 150.00
TEXT FORMATTING 75.00
UTILITIES I . UTILITIES II 52.50

SORENTO VALLEY ASSOCIATES
8" FLOPPY SYSTEM (1 MEG) .. $1995.00
8" FLOPPY SYSTEM (2 MEG) 2599.00
10 MEG WINC. FOR APPLE 3399.00
128K RAM BOARD 649.00
192K RAM BOARD 845.00
256K RAM BOARD 949.00

T/MAKER COMPANY
T/MAKER III $249.00

VIDEX
ENHANCER II $119.00
VIDEX KEYBOARD ENHANCER ... 105.00
VIDEX VIDEOTERM FOR APPLE II. 299.00

VISICORP
DESKTOP PLAN APPLE II $184.00
DESKTOP PLAN IBM 228.00
VISICALC 184.00
VISICALC ADVANCED VERSION .. 339.00
VISICALC BUSINESS FORECASTING 89.00
VISIDEX 184.00
VISIFILE APPLE II 184.00
VISIFILE IBM 228.00
VISILINK 184.00
VISIPACK 619.00
VISIPLOT FOR APPLE 159.00
VISISCHEDULE 228.00
VISITERM 80.00
VISITREND/VISIPLOT 228.00

www.americanradiohistory.com

We want you to know...

MICROHOUSE, because we don't just answer phones, we answer questions.

We want you to know...
MICROHOUSE continues to feature great prices and quality softwares and hardware.

We want you to know...
MICROHOUSE introduces new products:

THE ANSWER — **NORTH AMERICAN BUSINESS SYSTEMS, INC.**

Now you can truly have information at the touch of a button from the world's first self-teaching database system. THE ANSWER uses "electronic cards" or computerized versions of index cards. These cards hold all your pertinent information in the sequence you want it. With THE ANSWER's report generation feature, you can also do mailings, business reports, math, and high level searching.

LIST PRICE: $295.00 — MICROHOUSE PRICE $249.00

FAST GRAPHS — **INNOVATIVE SOFTWARE**

FAST GRAPHS is a complete graphics and plotting program designed for the IBM-PC with a color or high resolution black and white monitor. Completely menu driven, FAST GRAPHS automatically scales axes, titles, and creates graph legends; using manual data input or direct data input from Visicalc, or most other spread sheet and database programs. Special draw mode with painting and erasing feature allows you to creatively edit your graphs and charts.

List Price: $295.00 — MICROHOUSE PRICE: $189.00

CALSTAR — **CALIFORNIA COMPUTER SYSTEMS, INC.**

CALSTAR is a brand new, expandable, single board computer system which is ideally suited to business applications. It combines high priced benefits at a cost any business can afford. Calstar offers 2-8" double sided-double density disc drives (2 meg capacity!). Software included in every CALSTAR: CP/M, PERFECT WRITER, PERFECT SPELLER, PERFECT CALC, and PERFECT FILER. CALL MICROHOUSE FOR DETAILS!

List Price: $2995.00 — MICROHOUSE PRICE: $2695.00

PRINTMASTER F-10 — **C. ITOH**

The PRINTMASTER is built on an aluminum base and uses high quality metal parts for reliability and dependability. It streams along at 55 LQcps (letter quality characters per second) with all the qualities of a STARWRITER. MICROHOUSE is an authorized C. ITOH repair center.

MICROHOUSE PRICE: $1749.00

We want you to know...
MICROHOUSE has a 24 hour computerized order system called MICROLINE which enables you to access specific product information and place an order if you wish. MICROLINE can be reached at 1-215-868-1203.

P.O. BOX 499/1444 LINDEN ST., DEPT. 201.. BETHLEHEM, PA 18016

IBM IS A REGISTERED TRADEMARK OF INTERNATIONAL BUSINESS MACHINES. CP/M IS A REGISTERED TRADEMARK OF DIGITAL RESEARCH, INC., APPLE IS A REGISTERED TRADEMARK OF APPLE COMPUTERS, INC., PERFECT WRITER, PERFECT SPELLER, PERFECT CALC ARE TRADEMARKS OF PERFECT SOFTWARE, INC. THE ANSWER IS A TRADEMARK OF NORTH AMERICAN BUSINESS SYSTEMS. FAST GRAPH IS A TRADEMARK OF INNOVATIVE SOFTWARE MARKETING, INC. CROSSTALK IS A TRADEMARK OF MICROSTUFF. INFOSTAR IS A TRADEMARK OF MICROPRO. PRICES, SPECIFICATIONS AND AVAILIBILITY SUBJECT TO CHANGE WITHOUT NOTICE. NOT ALL PROGRAMS AVAILABLE IN ALL FORMATS. PLEASE CALL FOR ADDITIONAL PRODUCT INFORMATION. DEALER INQUIRIES WELCOME.

WE WANT YOU TO KNOW...

MICROHOUSE

Circle 282 on inquiry card.

Your Micro-computer People

www.americanradiohistory.com

Letters

Misleading Advertising

I read with great interest an advertisement for the AMI II++ Computer, manufactured by Apollo Computer Company of Taiwan and distributed by Oriental Investments Limited of Switzerland (November 1982 BYTE, page 332). The computer is advertised as being "Apple II Plus Compatible" and appears nearly identical in its physical characteristics to the Apple II. The terms of sale for the computer, which is offered at an enormous price reduction over the usual discounted cost of an Apple II, require prepayment by money order or by certified check.

Because of recent articles concerning the potential infringement of copyrights owned by Apple, I contacted the U.S. Customs Service in Washington [(202) 566-5765] to inquire on the legality of importing the AMI II++. I was told that all Apple II "look-alikes," specifically including those manufactured by Apollo Company, will be seized by Customs upon import.

In my opinion your magazine has done a great disservice to your readers in carrying the ad for the AMI II++ Computer. I hope that not many of your readers have responded to this alluring ad and sent in their prepayments only to have their purchased equipment impounded at the border.

Richard L. Merriam
7 Thoreau Rd.
Lexington, MA 02173

As is true of most publications, BYTE periodically receives complaints from one advertiser (or individual) about the activities of another advertiser. As is also true of all magazines, it is quite impossible for us to act as judge and jury and arbitrate commercial disputes between advertisers. In addition to other problems, the cost of the technical and legal expertise that we would have to hire would put our magazine out of the price range of most of our readers and advertisers alike.

Is there nothing, then, that a magazine like BYTE can or should do? Of course there is. Every advertisement from a new advertiser is reviewed both by an editor and a publisher in an attempt to spot problems and potential reader rip-offs before they occur. While this is not foolproof, we are pleased that we have headed off several problems before they found their way into print.

The other step we can take is to adhere rigorously to the rulings of government tribunals or agencies, who, after all, are the appropriate ones to respond to disputes between advertisers. Unfortunately, unless the prevailing advertiser or the tribunal itself thinks to inform us of a ruling, there is no automatic way we receive this information. Thus, it was somewhat fortuitous that we received a copy of a Customs Department Newsletter mentioning the importation ban against some Apple II "look-alikes." As soon as we received that notice, the ad in question was removed from all issues not yet printed. . . . **Gordon R. Williamson**

Language Flexibility

Jerry Pournelle's exposure of the high priests of computer software is long overdue (see "User's Column," October 1982 BYTE, page 254).

Since the microcomputer revolution began, these high priests have stood by their "cure-all" languages and have had a put-down attitude toward us poor slobs using "nonstructured" code (anything with a GOTO statement). Fact is, it's easier to defend a familiar language than to tread on unfamiliar territory by trying to learn another.

Let's get with it, gang! Every language on the market has its share of strengths and weaknesses. Just as a wood craftsman requires a variety of special tools to do the job right, the professional programmer needs to understand which software "tools" are available to get the job done. There is no "best" programming language, but given any particular problem, there are several languages that will do the job quite well.

The software engineer needs to be able to select which language is suitable for the task at hand. That might involve breaking down a project into modules written in BASIC, FORTRAN, COBOL, and assembly language to capitalize on the strong points of each language. I admire Digital Research, Microsoft, and others for taking steps in this direction to allow the programmer to "link" modules written in different languages into a single program.

The hardware side of the computer revolution is leaps and bounds ahead of, and being held back by, the software development side. It's high time that we move software development from the mystical black art of the '60s into the rapidly changing environment of the '80s. The high priest stuck holding onto ALGOL/Pascal/FORTRAN/whatever as the cure-all language will be much like the electrical engineer of the '50s left holding a vacuum tube.

Robert S. Walden, President
XL Computer Products
POB 805
Mesa, AZ 85202

Almost a Tinkerer's Dream

I just had to write and compliment you on the November 1982 BYTE. I am an electrical engineer and a hardware hacker from way back, and I was about ready to let my subscription to BYTE lapse. While hardware hackers are a dying breed, I had begun to think that we were entirely forgotten. I realize that there aren't many left, but there are probably more of us than there are disabled microcomputer users (see the September 1982 BYTE on "Computers and the Disabled") or artist microcomputer users (July 1982 BYTE, "Computers in the Arts and Sciences") or even microcomputer users that program in Logo (August 1982 BYTE, "Logo"). While these are probably worthy causes to devote an issue of BYTE to, it seemed that the tinkerers were entirely left out. And then came the November 1982 issue. While not quite a tinkerer's dream, it is in the general direction of one. Steve Ciarcia's "Build the Circuit Cellar MPX-16 Computer System, Part 2" (page 78), Phil Lemmons's informative article "Victor Victorious: The Victor 9000 Computer" (page 216), a vector-graphics construction article (Billy Garrett's "Microvec: The Other Type of Video Display," page 508), and even Phil Lemmons's "An Interview with Chuck Peddle" (page 256) were all interesting. No long, boring articles about why this DBMS (database management system) is better than that (for a *home* computer?), no articles on a language that needs five full-time programmers and a mainframe computer to maintain it, and no one telling me to rush right out and plunk down $4000 for the latest do-everything-but-change-the-baby gizmo.

While I am not advising that you change the editorial direction of BYTE, I

www.americanradiohistory.com

FACIT 4510

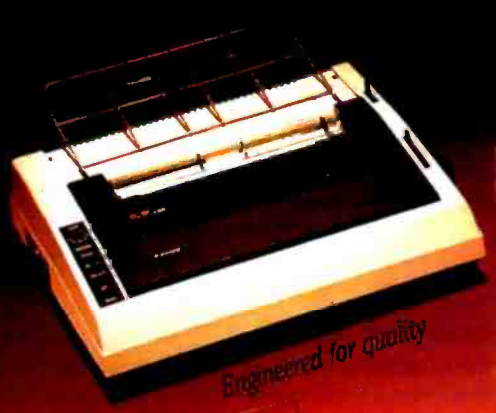

Engineered for quality

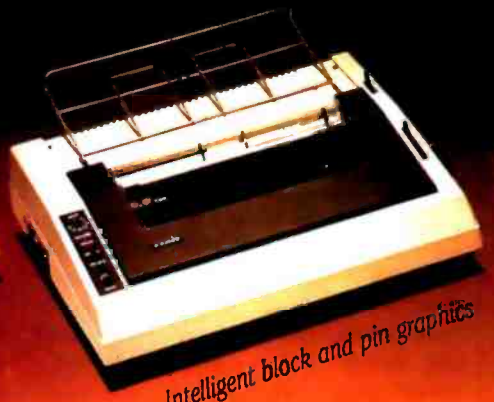

Intelligent block and pin graphics

Built industry compatible

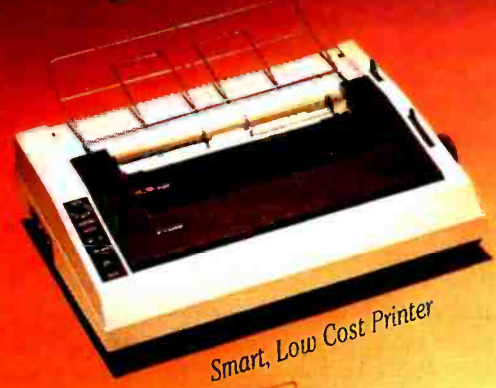

Smart, Low Cost Printer

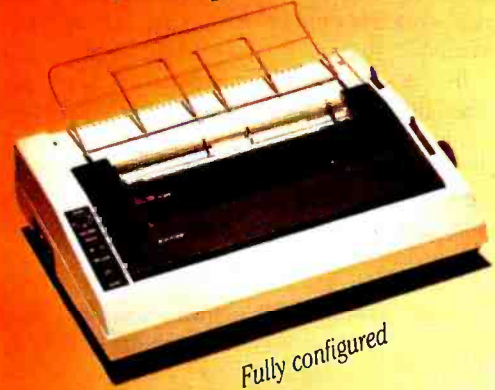

Fully configured

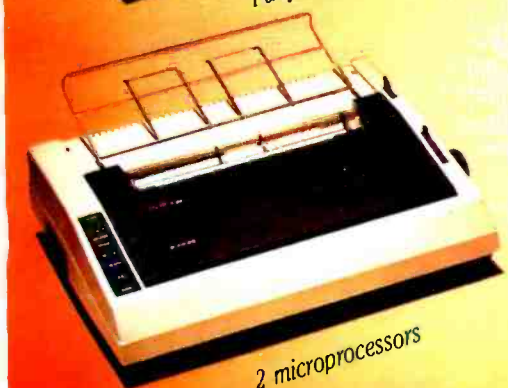

2 microprocessors

To put your micro computer on printing terms

The Facit 4510 Low Cost 80-column Serial Matrix Printer is a thoroughbred micro printer. Engineered for quality and professional computer outputs. Facit 4510 fully configured features most printer options as standard. State-of-the-art micro-processor concept and a 2K-work buffer accepts printing data as fast as your computer can send it. Versatility comes from industry compatible interfaces – both parallel and serial RS-232-C.

Block graphics and pin graphics secure optimum system performance and give complete printing freedom.

Emphasizing multifont and high resolution capabilities including 8 national character sets as standard.

Fan fold tractor feed, single sheet and telex roll with friction feed completes your thoroughbred micro printer. The Facit 4510.

FACIT
DATAROYAL

235 Main Dunstable Road P.O. Box 828 Nashua, N.H. 03061. Phone: (603) 883-4157.

Europe: S-10545 Stockholm, Sweden. Phone: (8) 738 60 00.

Circle 486 on Inquiry card.

www.americanradiohistory.com

am glad to see some articles of interest to people other than full-time data processing managers or game addicts. And besides, the November issue did not have one mention (that I could find) that "the uses of a computer are limited only by your imagination." If I ever see that trite, overworked, meaningless phrase in print again, I think that I will go into a homicidal rage.

Oh yes, tell Jerry Pournelle that I enjoy his "User's Column." And his books are okay, too.

Stuart Ball
1101 Dover St. NE
Cedar Rapids, IA 52402

For the Record

In the November 1982 BYTE, an erroneous reference was made in Peter Sørensen's article "Tronic Imagery" (page 48).

On page 56 (in the paragraph continuing from page 55), Michael Fremer, music and sound design supervisor for *Tron*, was referred to as the sound effects creator.

As the actual sound effects creator for *Tron*, I would like this point clarified.

Frank Serafine
Serafine FX
1861 South Bundy Dr.
West Los Angeles, CA 90025

What Did He Say?

BYTE magazine is used by a cross-section of people representing many different levels of involvement with the applications of computers. To serve and to maintain its readership, the magazine offers access to knowledge and access to tools.

While access to knowledge is also catered to by the book market, access to tools is provided almost exclusively by periodical publications of this type, some with self-serving and others with public-serving interests. In this context, the word tool can be taken in its global meaning of "what is instrumental in the realization of something."

The more useful BYTE magazine becomes at providing both types of access, the more likely it is to become itself a tool and be used as such by its readers. Of all needs presented to the editors of the magazine by the readers, the key demand will always be for more usefulness, hence for more useful access. End of loop.

The editor's job: define "access."

The reader's job: define "useful."

I am right now working on my own list of wishes. Readers, to your pens!

Laurent Dube
Green Island
POB 3670
Prince Rupert, British Columbia
Canada V8J 3W8

The Myth of Computer Literacy

Yes, computer literacy is really a myth. There is no such thing. Many articles have been written decrying the lack of computer literacy in our society. Thousands of books and junior college courses have been devoted to this subject, but it really doesn't exist. Why not? Because computers are not literate. In fact, computer operators need not be literate either (although knowing how to read is advantageous).

Like telephones, computers are machines and are quite easy to operate. You just turn them on and follow the instructions as they appear on the screen. You don't hear about telephone literacy. Computers are the same thing. No problem.

A properly functioning computer with user-friendly software is a pleasure. Where we get into trouble is when we have software or hardware that malfunctions. Just like the early telephones, which had a lot of hardware and software problems, computers (still in their evolutionary infancy) have often given us interesting moments. As time goes on, this will straighten out and become a rare annoyance, as is now the case with the telephone.

So why all the baloney about computer literacy? It is due to the desire of our news and education industries to increase their power. The news media tell us we are dumb, stupid, and will fall behind or lose a job if we are computer illiterate. This makes many people nervous and they buy more books, papers, and magazines in an effort to catch up. Educational institutions, suffering from the exit of all those baby-boom people, need more bodies to maintain income and justify their share of tax revenues.

Certainly we need programmers and systems analysts who must be well trained in computer technology, just as all telephone repairmen and installers must be trained for their trade. But for the rest of us consumers, all we do is turn the computer on and use it, just like the telephone, and that requires very little "literacy."

What we really need is to be digital-watch literate. I have a 45-function, $29 wrist watch with 4 buttons and I cannot make it stop beeping. . . .

E. J. Neiburger DDS
Dental Computer Newsletter
1000 North Ave.
Waukegan, IL 60085

An Ounce of Preventive Maintenance

We second Mr. Brady's motion (November 1982 BYTE, "Letters," page 19) requesting more BYTE articles concerning maintenance and repair.

Computers may sometimes be astonishing in their capabilities but they're still machines, and machines break—some more frequently than others and some more mysteriously.

Of course, thorough and regular maintenance can help cut down on the number of breakdowns, but when the machine does go on the blink there's no reason why it can't be up and running quickly. To ensure a minimum of downtime, every computer owner should establish a relationship with a reliable and efficient maintenance organization before any repairs are needed.

In the world of microcomputers, the most likely and most reliable source of service is the computer distributor or dealer. In short, the person you buy it from. It is naive to expect prompt service from hardware makers. They are in the business of manufacturing, not servicing, microcomputers.

So it behooves the microcomputer buyer to compare service capabilities as well as prices when shopping for a system. In fact, service should be a more crucial factor than price in the decision because the few dollars saved by buying from a mail-order house with no maintenance service will cost you dearly as time goes by and equipment fails.

In order to evaluate the maintenance capabilities of computer dealers and to make sure you'll get prompt service if and when you need it, make sure they meet the following criteria.

www.americanradiohistory.com

IF MetaCard DOESN'T IMPROVE YOUR WORKING CONDITIONS WE'LL GIVE YOU YOUR MONEY BACK.

It's almost three in the morning. You knew just one more line of code and your program would be finished. That was seven hours ago. It's hard work developing good software. Writing it on the Apple II is no exception. Although we can't promise to get you to bed by eleven o'clock, we can make your job a lot easier.

When we developed MetaCard, a co-processor system for the Apple II, we designed in 128K bytes of on-board memory with parity. Enough memory to run the most powerful development tools available. We included memory expansion capabilities beyond 128K.

And we made sure it could run all three operating systems for the IBM PC. MetaCard does more than make your job easier, it opens up new development areas. If you want to create or run more powerful applications software for the Apple, or for the IBM PC or other 8086/88-based systems, you should have a MetaCard in your Apple. MetaCard supports the most popular development languages available for MS-DOS, CP/M-86 and UCSD p-System Version IV. Languages like Pascal, C, COBOL, FORTRAN, BASIC and almost all others operate at peak performance. MetaCard enables you to continue to use most of the popular peripherals for your Apple II, plus all of your existing software. And with many best selling applications for the IBM PC available soon, you can use your Apple in new and developing areas.

MetaCard uses the Intel 8088 processor and operates at a full 5 Mhz. And MetaCard's real-time clock, external power supply, parity checking RAM, and power-up ROM diagnostics give you the features and reliability you demand.

Satisfaction Guaranteed

We know you'll still work through the night. But if MetaCard doesn't improve your working conditions, return it within 30 days, and we'll send your money back. No questions asked.

MetaCard, complete with documentation, MS-DOS and UCSD p-System (CP/M-86 optional) and power supply, is available in both 64 and 128K configurations, priced at $980 and $1,150 respectively. The MetaCard System Operating Manual is available for only $25.

For more information write us today, **Metamorphic Systems, Inc.,** 8950 Villa La Jolla Drive, Suite 1200, La Jolla, CA 92037. Or call us today to order yours at

800/228-8088

In California call 619/457-3870.

MetaCard is a trademark of Metamorphic Systems, Inc., Apple — Apple Computer Inc., Intel 8088 — Intel Corporation, CP/M-86 — Digital Research Corporation, MS-DOS — Microsoft, UCSD p-System — University of California, IBM PC — IBM.

Circle 265 on Inquiry card.

MetaCard

www.americanradiohistory.com

Proximity: Common sense tells you that you'll get better service from a company close by than one far away. Also keep in mind that shipping charges are usually the responsibility of the customer.

Longevity: We've been living in the age of computers long enough that you needn't deal with a company that doesn't have a substantial track record. (For instance, Tristar has been in business over 10 years.) Unless there's something very special about the company, don't deal with a brand-new business. The computer industry has seen too many casualties, and one thing you want is a company that will be around tomorrow.

Legitimacy: It's easy to get into the computer business today. Deal with a *real* business, not an answering service. Ask for references.

Adequate stock of replacement parts: Ask if the company has an inventory of replacement parts. Having the necessary parts on hand can mean the difference between hours and weeks of downtime.

Tools and space for in-house repair: In order to provide good maintenance, adequate money must be allotted for a repair shop and sophisticated tools. Make sure that your dealer has done so.

Trained people: Any reputable manufacturer runs training sessions to teach people how to repair their equipment. Make sure one of your dealer's employees has gone to that school.

Computer downtime means money and inconvenience and sometimes even hardship for anyone whose computer operations are essential. For those reasons, all computer owners should be well versed in their equipment's proper care and feeding and should have a top-notch maintenance organization on call to fix things if they start going bad.

Pete Morley
Tristar Data Systems
Cherry Hill Industrial Center
2 Keystone Ave.
Cherry Hill, NJ 08003

Excellence Acknowledged.

Some people demand the best.

Superior quality at superior value identifies the "best" products, and the best in Apple II®-compatible drives is the Micro-Sci line of 5¼" floppy disk drives and subsystems.

Business people needing storage, reliability and fast access have been impressed with Micro-Sci's A40 system since we introduced it back in 1979. For a lower list price than the Apple Disk II®'s, the A40 offers 20Kb more capacity, faster access time and greater data reliability.

The Micro-Sci A70 drive combines quick access and high reliability with a full 286Kb storage capability.

The newest member of Micro-Sci's Apple II-compatible family, the A2, is a direct replacement for the Disk II, featuring total compatibility at a lower cost. Better still, you can mix our A2 drive and controller with their drive and controller for complete freedom of interchangeability.

And Micro-Sci's controller includes operating features like jumper-selectable 3.2 and 3.3 DOS.

Give yourself the privilege.

Micro-Sci delivers the most in quality, reliability and performance. So when you consider additional drives or a disk subsystem for your Apple II, indulge yourself in the Micro-Sci alternative.

See our complete product line today at a dealer near you.

(SPECIAL NOTE TO APPLE III® USERS: Micro-Sci also offers a full range of Apple III-compatible drives. Ask your local dealer for details.)

μ-SCI
MICRO-SCI

Micro-Sci is a Division of Standun Controls, Inc.
2158 SOUTH HATHAWAY STREET • SANTA ANA, CALIFORNIA 92705 • 714/662-2801 • TELEX: 910-346-6739
International Dealer Inquiries... IMC International Market's Corp. Telephone: 714/730-0963 • Telex: 277782-ROBY UR

® Apple, Apple II, Apple III and Disk II are registered trademarks of Apple Computer, Inc.

Victor Club

Phil Lemmons's article "Victor Victorious: The Victor 9000 Computer" (November 1982 BYTE, page 216) was indeed impressive.

The Andrews Group is heavily involved in the development end of CAD/CAM (computer-aided design/computer-aided management) software for the Victor 9000 coupled with Houston Instrument plotters and digitizers.

Over the last six months of development work we have had tremendous support from the Victor Software Group in Chicago. We feel at this point, however, there should be some central point for information exchange for the Victor.

To this end we have set up the Victor User's Club and for the present time we will use the offices of the Andrews Group and its facilities.

The club will be for the free exchange of information and will publish a monthly newsletter pertaining to new developments and software ideas. The yearly fee is $35, which will cover publishing and mailing expenses.

Mark W. Andrews
The Andrews Group
310 SW 2nd St.
Fort Lauderdale, FL 33312

Circle 276 on inquiry card.

Circle 484 for dealers.
Circle 485 for end users. ➡

www.americanradiohistory.com

When you're looking for a heavyweight performer at a low price, IBC outweighs the competition.

IBC MIDDI CADET™		ALTOS™ ACS 8000-10	
Maximum Users	9	Maximum Users	4
Disk Storage	20 MB	Disk Storage	10 MB
Memory	256 KB**	Memory	208 KB
CPU Speed	6 MHz	CPU Speed	4 MHz
Benchmark (Elapsed time)	1:44 Minutes*	Benchmark (Elapsed time)	5:03 Minutes*
List Price	$7495.00	List Price	$7995.00

The IBC MIDDI Cadet is better, faster and less expensive than the ALTOS ACS-8000-10 and others. That's why we call it the heavyweight performer.

Because the MIDDI is completely software compatible with ALTOS, ONYX™, Dynabyte™ and others using CP/M™ 2.2, MP/M™ II or OASIS™, you can transport your applications software to the MIDDI without modification. So why not take the benchmark test yourself.

If you are an OEM, system integrator, multiple end user, or dealer for any of our competitors, send a copy of your application program to IBC. We will run your software on the MIDDI without modification and give you the elapsed time in minutes. You be the judge. If it really is faster than your current hardware and it is, then you owe it to yourself and your customers to switch to IBC.

So remember! When you want a heavyweight performer at a low price, contact:

OUTSIDE THE USA
IBC Integrated Business Computers
21592 Marilla Street
Chatsworth, CA 91311
(213) 882-9007 TELEX NO. 215349

WITHIN THE USA
IBC DISTRIBUTION
4185 Harrison Blvd., Suite 301
Ogden, UTAH 84403
(801) 621-2294

See us at Spring Comdex

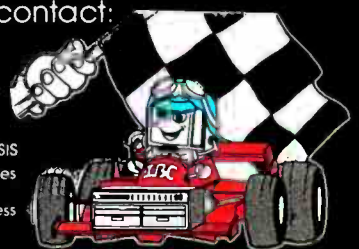

*Four users under OASIS
** Upgradeable to 512 K Bytes

ALTOS is a trademark of ALTOS Computer Systems. ONYX is a trademark of Onyx Systems Inc. DYNABYTE is a trademark of Dynabyte Business Computers. CP/M & MP/M are trademarks of Digital Research, and OASIS is a trademark of Phase One Systems

www.americanradiohistory.com

The Real Bottleneck

I take exception to a term which I fear is becoming widely accepted. I have recently seen it in BYTE and other publications. This term is *Von Neumann bottleneck*.

The term is used because the concept of the stored program computer as we know it today is largely due to the work of John Von Neumann (1903-1957) in the early '40s and because in this concept instructions are fetched and executed in a strictly linear fashion.

I disagree with the popular use of the phrase for several reasons. First, in his innovative work this genius broke the bottleneck of the day, which was the common narrowmindedness that thought of computers in terms of single-use or hard-to-modify dedicated systems.

Second, the term contains the pejorative connotation that if it were not for Von Neumann this bottleneck would not exist today. It certainly would because it is related to hardware technology more than to anything else.

Third, if Von Neumann had lived longer, the state of computer theory would most likely be far more advanced than it is. Doubtless his theoretical contributions would have gone well beyond the advances in hardware that we have seen over the years, particularly in regard to the capability of true multi- and parallel-processing. So if there is a Von Neumann bottleneck, it is in the loss that the world of mathematics and computers suffered in his early death.

The contributions Von Neumann made to mathematics are well known, from the founding of the theory of games, with its wide-reaching applications in areas like weather research and economics, to his work in set theory and theoretical physics and his work in the logical design of electronic computers and a general theory of automata. These contributions, along with the many anecdotes still told today about the intellectual powers of the man, attest to his true genius in many areas of mathematics and computing theory. I strongly protest the use of the term I have been discussing—it is a manifest injustice to connect the name Von Neumann with this pseudo-problem.

In a constructive vein, may I make two suggestions. First, that this phenomenon be more aptly named. Terms like *uniprocessing bottleneck, linear-processng bottleneck* or *sequential-processing bottleneck* come to mind, but I will not presume to coin the definitive phrase here.

Second, may I suggest the following definition of the term *Von Neumann bottleneck*: the fact that more than 95 percent of all people have less than 5 percent of the ability of John Von Neumann.

Philip Mahler
Instructor of Mathematics
Middlesex Community College
Springs Rd.
Bedford, MA 01730

The Meaning of Oppression

Just to set the record straight: I am the source of the "RESIST THE DRAFT" message that Dr. Kallend discovered assembled into Apple Logo (see the December 1982 BYTE "Letters" column, page 18). Neither Apple Computer Inc. (which dis-

The Most Promising Duet For An Orchestra.

Our duet is perfect for a single user system.
The same duet performs even better in a multi-user orchestra.

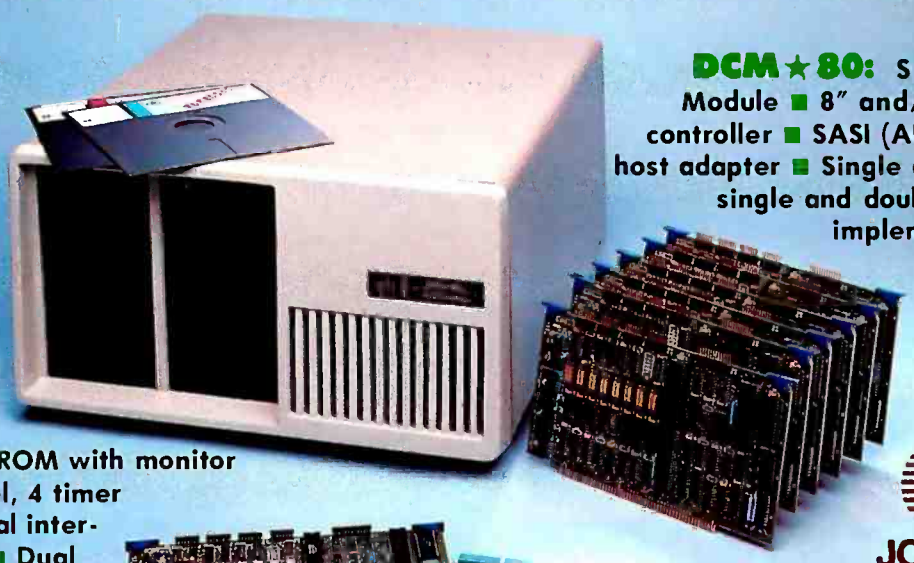

MCM★80: S-100 Single Board Computer ■ Single or multi processor capability ■ Programmable master or slave selection ■ Redundant processor manipulation ■ 4MHz Z80A or 6MHz Z80B CPU ■ 64K RAM and 2K EPROM with monitor ■ 2 serial, 2 parallel, 4 timer ports ■ Bi-directional interprocessor channel ■ Dual mode serial ports interface ■ Multi-layer PCB construction.
$495. Circle 228 on Inquiry card.

DCM★80: S-100 Disk Controller Module ■ 8" and/or 5¼" floppy disk controller ■ SASI (ANSI, SCSI) hard disk host adapter ■ Single and double density, single and double side ■ Software implementation on CP/M[1] 2.2 and TurboDOS[2]

[1] TM of Digital Research, Inc.
[2] TM of Software 2000, Inc.

$345.

JC SYSTEMS
1075 Hiawatha Ct.
Fremont, CA 94538
(415) 657-4215

www.americanradiohistory.com

Videx INC. T.M.

897 N.W. Grant Ave. • Corvallis, Oregon 97330 • 503/758-0521

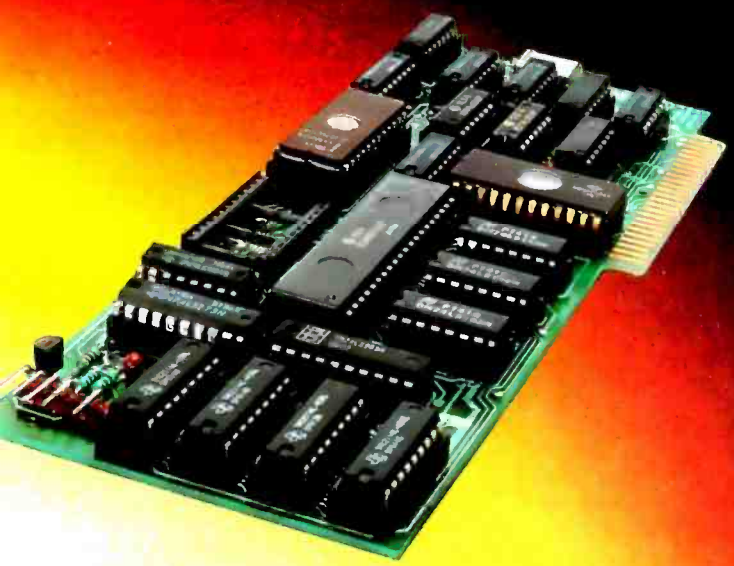

VIDEOTERM

Expanding Horizons in Text Display

Videoterm increases your Apple][® display to a full capacity 80 columns. Proofreading text problems are a thing of the past. With Videoterm your text is displayed in upper and lower case characters with true descenders utilizing a 7 by 9 character matrix. The time-tested Videoterm is compatible with most word processors and is available with alternate character fonts. Once you've explored the advantages of Videoterm, you'll discover a whole new world for you and your Apple][.

Suggested retail price: $345.00

ACCESSORIES

Videoterm Utilities Disc includes:
- Graphics Template System
- Font Editor
- Mid-Res Graphics
- Applesoft Read Screen Utility
- Top & Bottom Scrolling
- Pascal Vidpatch

Suggested price $37.00

Videoterm Character Set EPROMs
- French
- German
- Inverse
- Katakana (Japanese)
- Math & Greek Symbols
- Norsk
- N. European
- Russian
- Spanish
- Super & Subscript

Suggested price $29.00 each.

Dvorak EPROM (Enhancer)—$29.00
Lower Case Chip (Rev 7 & up)—$29.00

SOFT VIDEO SWITCH

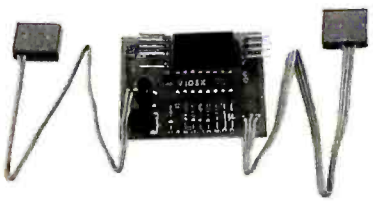

The Soft Video Switch is an automatic version of the popular Switchplate. It knows whether it should display 40 or 80 columns or Apple graphics. It does the tedious work of switching video-out signals so you don't have to. The Soft Video Switch can be controlled by software. May be used with any Videoterm with Firmware 2.0 or greater. The single wire shift mod is also supported.

Package price is $35.00.

ENHANCER][

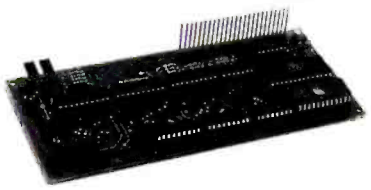

The Enhancer][features a typeahead buffer. Your keyboard has upper and lower case, and will auto repeat any key held down. A single keystroke can become a word or an entire sentence. Controlled by a powerful microprocessor, Enhancer][allows you to re-map your keyboard or add specialized features. Changing a chip creates a totally different keyboard. Enhancer][Utilities Disc included.

Suggested retail price $149.00.

Circle 443 on Inquiry card.

Videx is a trademark of Videx, Inc.

Apple][is a registered trademark of Apple Computer Inc.

www.americanradiohistory.com

PRINTER OPTIMIZER®

Why buy a mere "spooler" when you can have THE PRINTER OPTIMIZER?

* 64k to 256k spooling buffer
* adapts different brands - can mix Serial and Parallel
* character conversion: 1 to 1, 1 to many, many to 1, ignore
* pushbutton automated access to your printer's various type styles and printing modes
* several ways to PAUSE printing
* access any character, graphic design or printer "trick" from any program at any time
* special features for use as a MODEM buffer

ETI²®



The cost effective alternative. Converts IBM, Adler/Royal, Olympia and other Electronic Typewriters into letter quality printers.

* 2K memory buffer
* access all typewriter characters and automated features
* Serial or Parallel versions
* Many proprietary features and commands insure compatibility with your system and software
* Typesetting capability!

PETI²®

Super low cost adaptor for new inexpensive portable Electronic Typewriters can yield typewriter and letter quality printer combination for around $500 total!

* perfect for "personal use"
* easy "plug-in" Parallel connection to most computers
* compatible with popular word processing programs

APPLIED CREATIVE TECHNOLOGY INC.

2723 Avenue E East, Suite 717
Arlington, Texas 76011
(817)-261-6905
(800)-433-5373

Letters

tributes the product) nor Logo Computer Systems (which manufactures it) knew of its inclusion.

Dr. Kallend sees "an early start on 1984" in the dissemination of the message (which he regards as subversive) "into so many of our schools." This view is astonishingly upside down. In the nightmare world of George Orwell's novel *1984*, the expression of "subversive" ideas was all but wiped out; thus was obedience to government authority assured. It's hard to imagine a clearer antithesis to the type of oppression depicted in *1984* than encouraging defiance of the draft, in schools and elsewhere. Dr. Kallend seems to be telling us that resistance is oppression.

Gary L. Drescher
NE43-743
Massachusetts Institute of Technology
Cambridge, MA 02139

A Language Is Born

November 1982 saw continued discussion of the QWERTY versus Dvorak keyboards in the "Letters" section of BYTE (page 16). I am a touch-typist, and although I did not relish the prospect of learning to type all over again, the benefits from Dvorak's "simpler keyboard" intrigued me.

As with many microcomputers, the keyboard on my Osborne is not redefinable. This meant that I couldn't implement Dvorak's layout without first replacing my ROM. However, I found a solution: rather than redefining the keyboard into Dvorak's structure, I chose to redefine the alphabet. If the word to be typed is "letter" I mentally encode it and type the "Dvorak-English" word "pokkdo." "Dear Sir" becomes "Hdao :so" and "Having a wonderful time." equates to the seemingly nonsensical "Ja.gly a ,slhdotfp kgmdq."

I find that I have sufficient time to think of (or read) what I wish to type, convert its spelling into Dvorak-English, and still retain the speed of a true Dvorak keyboard. The one problem, that other people cannot read my text until it is decrypted, does not significantly subtract from the value I have gained. However, it is my intention to seek the removal of even this irritation. Dvorak-English as a second language, perhaps taught alongside French and Spanish in public schools, would do the trick.

Chris Rudek
5975 Newman Court, #4
Sacramento, CA 95819

Warranty Pirates

I thoroughly enjoy Jerry Pournelle's articles and find them informative and entertaining. However, I would like to take a good-natured poke at one of his commentaries in the November 1982 BYTE "User's Column" (page 394) regarding the warranty and license information included with the Soft-Link evaluation copy of Colortrol that Mr. Pournelle considered reviewing.

If Mr. Pournelle will reread the warranty and license information that he signed when he began running CP/M on his system, he will find that Soft-Link, as many other software vendors have done, has merely used wording similar to that used by Digital Research. These vendors apparently feel there's no point in arguing with success. Digital Research has a successful software package, has not been sued out of business, and has successfully sued against pirates, while other software companies have difficulty coming up with anything else as simple and as protective. In other words, most software houses have "pirated" Digital Research's warranty and license format, probably for good reason, and Soft-Link shouldn't be taken to task for doing the same.

Actually, most software houses are willing to be less restrictive in practice, but with suits being brought for almost any reason, valid and otherwise, and with such suits being expensive to defend, with little or no compensation for the winning defense, software houses will probably continue to use similar wording in warranties and licenses, if for no other reason than to avoid attorney fees rather than responsibility.

R. David Otten, Owner/President
Signature Software Systems Inc.
5602 Stouder Place NW
Pickerington, OH 43147 ■

BYTE's Bugs

MARC This Correction

In the textbox on the MARC operating system that accompanied Christopher O. Kern's article "Microshell and Unica: Unix-Style Enhancements for CP/M," an incorrect telephone number was listed for Vortex Technology. (See the December 1982 BYTE, page 206.) The correct number is (213) 645-7200.■

www.americanradiohistory.com

BOXED IN THE CORNER BY YOUR SMALL BUSINESS COMPUTER?

The trouble with many of today's better known small business computers is they box you into a *single user system*. So after your big initial investment, you still have a single user system. You always will.

Now there's the Zeμs 4 from OSM Computers. *The Zeμs 4 is the first multi-user, multi-processor micro at single user prices.* The Zeμs 4 is less than one cubic foot and weighs 24.6 pounds.

Yet, it's like four separate, powerful small business computers in one. It allows up to four users to share a common data base *or* work independently. Each has his own CPU, 64K of RAM and I/O ports. That means greater operator independence, more processor power and greater reliability.

You needn't worry about running out of storage capacity either. The Zeμs 4 comes with a built-in hard disk, so users share up to 19MB of storage, about twice as much as most other multi-user systems.

You'll enjoy maximum flexibility in software applications too, because Zeμs 4's MUSE operating system runs programs compatible with CP/M. Plus MUSE provides extensive file management functions typically found only on mini computers.

Here's another big advantage: The Zeμs 4 is designed for low maintenance, low down-time. Its four modules snap in and out with a few minutes work. So if repairs are ever needed, modules are simply replaced through OSM's limited warranty program.

Maybe the best thing is that you can buy the powerful and expandable Zeμs 4 for $4,595 ($6,595 fully configured for four users).

The Zeμs 4 from OSM, the latest in a family of powerful, multi-user small business computers. It's the little box that lets you grow without boxing you in.

To find out more, call (800) 538-5120 or (415) 961-8680 in California or write to OSM Computer Corporation, 665 Clyde Avenue, Mountain View, CA 94043.

OSM

Computers. Your power to expand.

CP/M is a registered trademark of Digital Research, Inc.
Zeμs 4 and MUSE are trademarks of OSM Computer Corporation.
© 1983 OSM Computers.

Circle 329 on Inquiry card.

www.americanradiohistory.com

ARE YOU STILL LETTING YOUR PRINTER TIE UP YOUR COMPUTER?

While your printer is running, your computer is tied up. You can't use it for processing, computing, data entry. Nothing. All you *can* do is twiddle your thumbs until the program is finished.

Pretty ridiculous.

MICROBUFFER ALLOWS YOU TO PRINT AND PROCESS SIMULTANEOUSLY.

You just dump your printing data directly to Microbuffer, whoosh!, and continue processing. No waiting.

Microbuffer accepts data as fast as your computer can send it. It stores the data in its own memory buffer then takes control of the printer.

It's that easy.

THERE IS A MICROBUFFER FOR ANY COMPUTER/PRINTER COMBINATION.

Whatever your system, there is a specific Microbuffer designed to accommodate it.

FOR APPLE II COMPUTERS, Mircobuffer II features on-board firmware for text formatting and advanced graphics dump routines. Both serial and parllel versions have a power-efficient low-consumption design. Special functions include Basic listing formatter, self-test, buffer zap, and transparent and maintain modes. The 16K model is priced at $259 and the 32K, at $299.

FOR EPSON PRINTERS, Microbuffer/E comes in two serial versions — 8K or 16K (upgradable to 32K) — and two parallel versions — 16K or 32K (upgradable to 64K). The serial buffer supports both hardware handshaking and XON-XOFF software handshaking at baud rates up to 19,200. Both interfaces are compatible with standard Epson commands, including GRAFTRAX-80 and GRAFTRAX-80+. Prices range from $159 to $279.

ALL OTHER COMPUTER/PRINTER COMBINATIONS can be untied by the stand-alone Microbuffer In-line.

The serial stand-alone will support different input and output baud rates and different handshake protocol. Both serial and parallel versions are available in a 32K model at $299 or 64K for $349. Either can be user-upgraded to a total of 256K with 64K add-ons — just $179 each.

SIMPLE TO INSTALL.

Microbuffer II is slot-independent. It slips directly inside the Apple II in any slot except zero.

Microbuffer/E mounts easily inside the existing auxiliary slot directly inside the Epson printer.

The stand-alone Microbuffer is installed in-line between virtually any computer and any printer.

MICROBUFFER FROM PRACTICAL PERIPHERALS.

So what are you waiting for? Write to us for more information or ask your dealer for a demonstration.

When you see how much freedom Microbuffer will allow, you'll understand why it's so silly to be without one.

PRACTICAL PERIPHERALS, INC.™
31245 LA BAYA DRIVE
WESTLAKE VILLAGE, CA 91362
(213) 991-8200

www.americanradiohistory.com

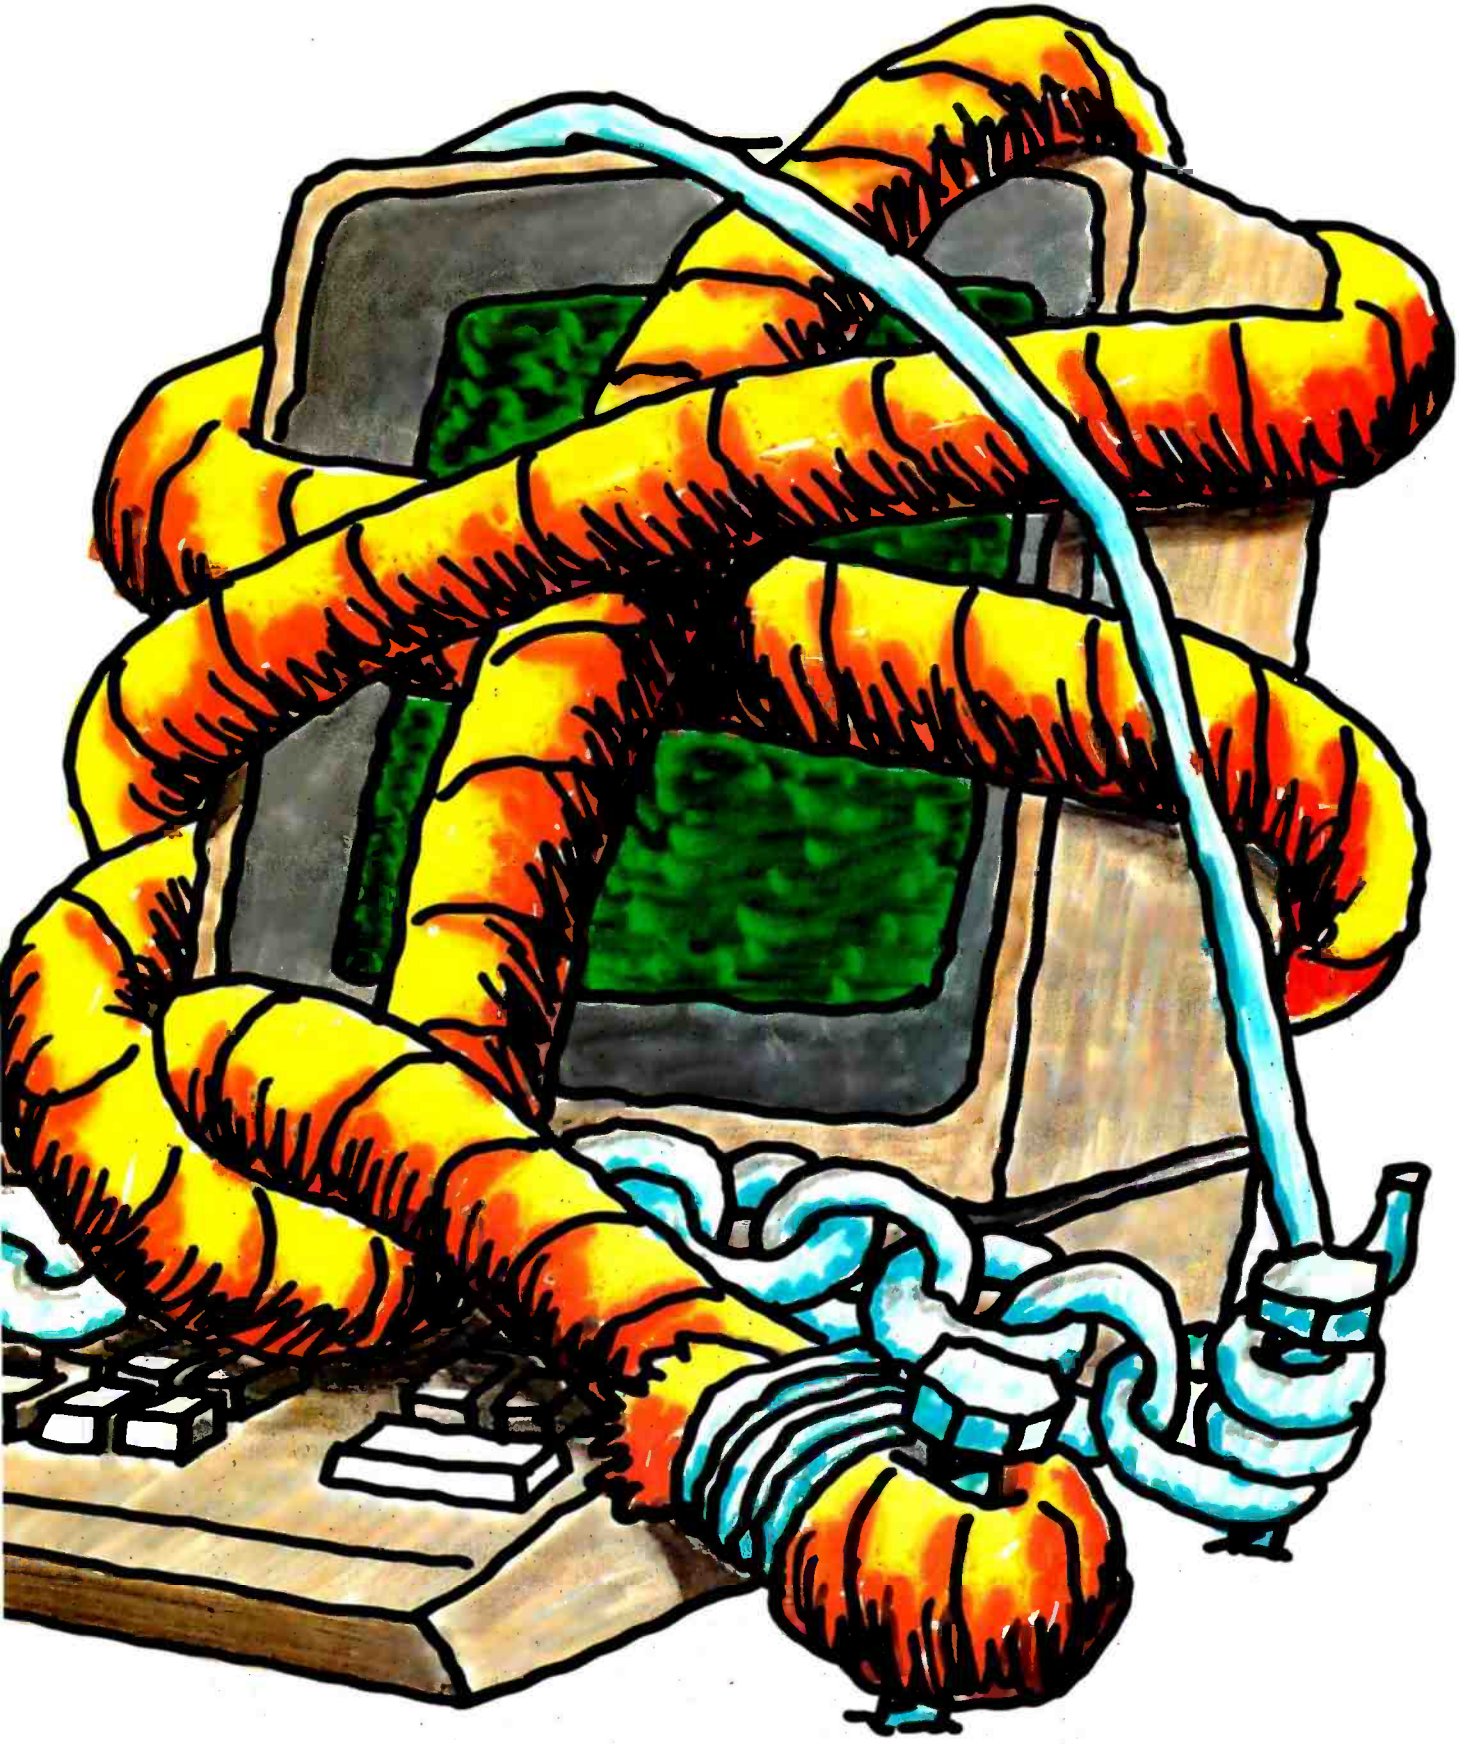

MICROBUFFER FREES COMPUTERS.

Circle 350 on inquiry card.

www.americanradiohistory.com

Build the ECM-103, an Originate/Answer Modem

The Texas Instruments TMS99532 component forms the heart of a Bell-103-compatible modem.

Steve Ciarcia
POB 582
Glastonbury, CT 06033

Back in the August 1980 BYTE, I presented an article on how to build an originate-only modem for under $50 (see reference 2). It must have been the right project at the right time; I know that several thousand of you ordered the kit version. Since then, however, technology has advanced. The degree of functionality that took about a hundred components and a fair amount of construction complexity in 1980 can now be obtained with less effort and can offer even better performance. The limited originate-only design from 2½ years ago may not be adequate for all applications. I believe a new design is warranted.

This month's project is the construction of a reliable and versatile 300-bps (bit-per-second) data-communication device called the Circuit Cellar ECM-103 modem (see photo 1). It requires no calibration or critical adjustments, uses only 30 components, and operates in both originate and answer modes. I think you'll be intrigued with its simplicity.

Copyright © 1983 by Steven A. Ciarcia.
All rights reserved.

Let's begin with a quick review of modems and data-communication techniques.

What Is a Modem?

The word *modem* is a contraction of the two words *modulator* and *demodulator*. The modem converts digital signals from the computer into analog signals, which can be transmitted via a telephone line. Various techniques can be employed in this conversion.

Modems are generally categorized by the speed at which they transmit data. The data-transmission rates are properly expressed in bits per second (bps), although you often hear the term *baud* used. Strictly speaking, "baud" measures the number of transitions in state of the communication link, rather than the amount of data represented by these transitions. A single change of state may in some cases represent multiple data bits, and therefore the data rate may not equal the baud rate. The difference can be important.

Modems are commonly divided into four categories, based on their speed of transmission. The low-speed modems are those operating at speeds from 0 to 600 bps. The medium-speed modems operate from 1200 to 2400 bps. From about 3600 bps to around 16,000 bps are a group of modems generally called high-speed, but still higher in speed are the wide-band modems, which work at speeds from 19,200 bps on up.

The higher the data rate, the greater the price of the modem. Most low-speed (300-bps) modems are generally under $200, while most 1200-bps units are in the $700 to $1000 range. Low- and medium-speed modems generally use voice-grade telephone lines, but the higher-speed units require dedicated communication-grade lines. And as the speed of data communication increases, the techniques required to ensure error-free reception become, by necessity, more sophisticated.

How Modems Work

The process of translating digital information into a form that can be sent through telephone lines is called *modulation*. Current practices include several techniques.

Low-speed modems generally employ a technique called *frequency-shift keying* (FSK), which uses two distinct

www.americanradiohistory.com

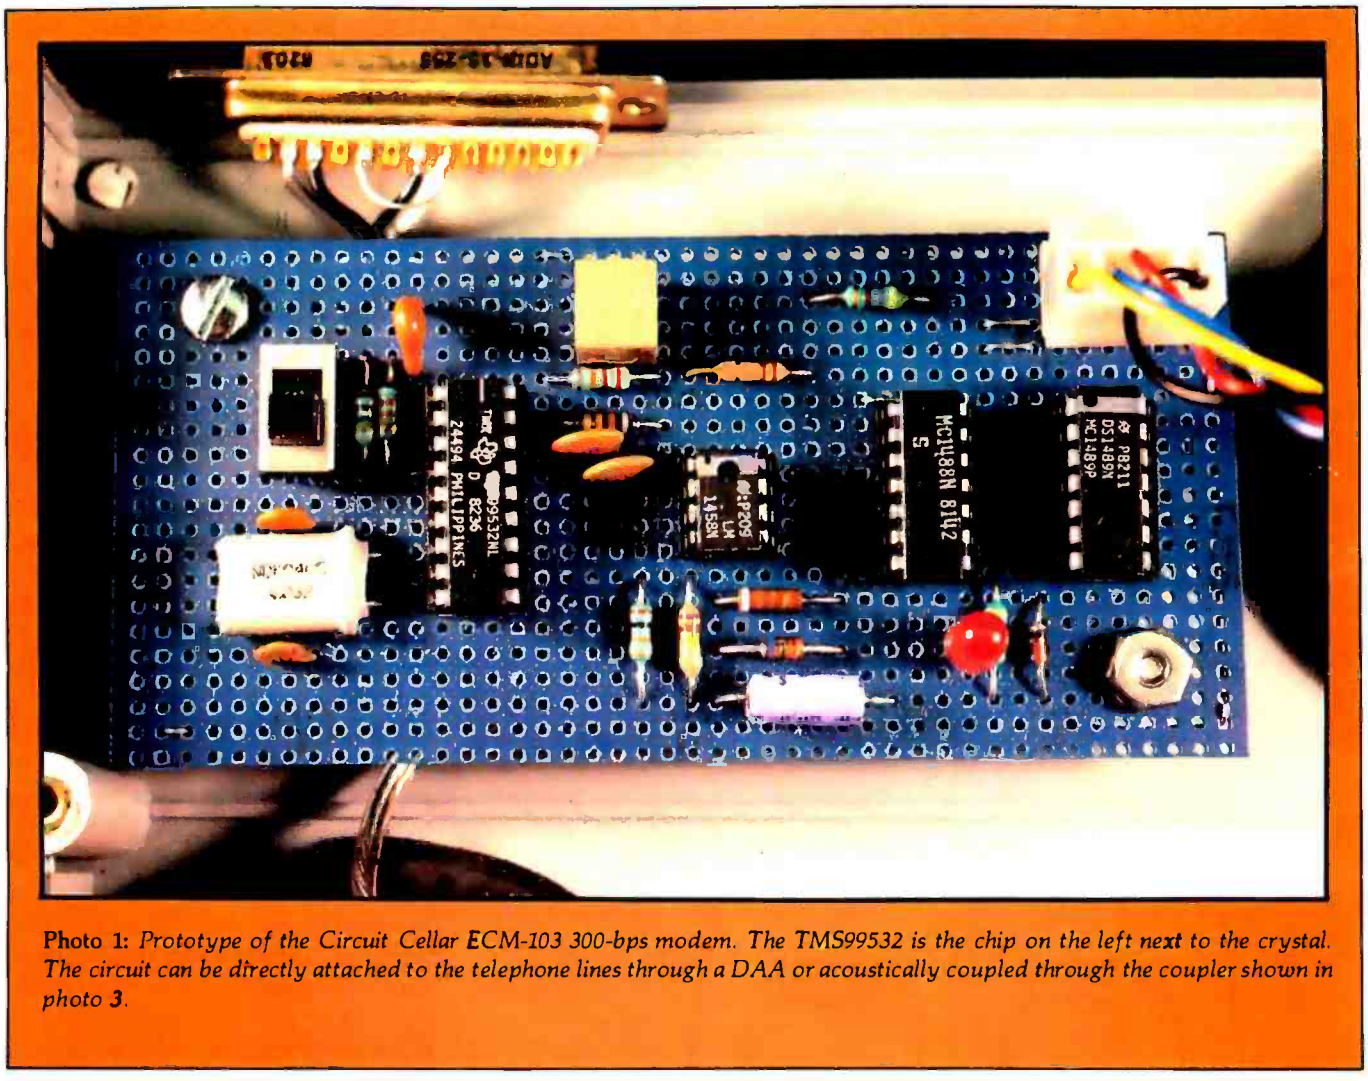

Photo 1: *Prototype of the Circuit Cellar ECM-103 300-bps modem. The TMS99532 is the chip on the left next to the crystal. The circuit can be directly attached to the telephone lines through a DAA or acoustically coupled through the coupler shown in photo 3.*

tones of different frequency to represent logic 1 and 0. Data is sent by the modem's alternately transmitting the two frequencies (i.e., shifting the frequency of its transmitted carrier tone). The amount of information that can be sent using FSK in a given interval of time is limited by the frequency bandwidth of the telephone line: a transmitted data bit must consist of at least the number of cycles of a 1 or 0 tone required for the receiver to recognize it, and the number of cycles of the transmitted tone taking place in a time interval is the same thing as its frequency. The frequencies used cannot exceed the capability of the line.

Higher-speed modems use more complex and sophisticated transmission techniques, all of which to some extent modulate not only the frequencies of the tones but their phase, and possibly amplitude, as well. These *phase-shift keying* (PSK) methods permit more compact data encoding, with more information transmitted in less time, by making a single change in the state of the physical communication link communicate more than one data bit. (In such a technique, the data rate differs from the baud rate; see reference 1.)

The most popular variation of PSK is called *quadrature amplitude modulation*, or QAM. Widely used in 1200-bps modems, QAM employs both amplitude and phase modulation to encode 2 bits of data in every state transition (see reference 4).

The chief drawback of any PSK technique is the sophistication required in the decoding mechanism of the receiving modem, which must sort out the information-bearing phase and amplitude variations in the received signal from the meaningless phase and amplitude distortions induced in the signal by the communication link.

Because this article is about building a low-speed modem, I'll save the discussion of these more sophisticated encoding techniques for a more appropriate time in the future.

How an FSK Modem Works

In computer communication via modems, one of the two modems involved is called the *originating* modem because the communication link is established beginning with it. The other modem is called the *answering* modem. In the archetypal case, the originating modem is associated with a video-display terminal, and the answering modem is connected to a remote host computer.

In frequency-shift-keyed communication, a modem is said to operate in either originate or answer mode. Each of these modes has its own unique set

www.americanradiohistory.com

Photo 2: *Inside view of prototype modem. Box contains modem circuit (upper left), coupler, and power supply (lower right).*

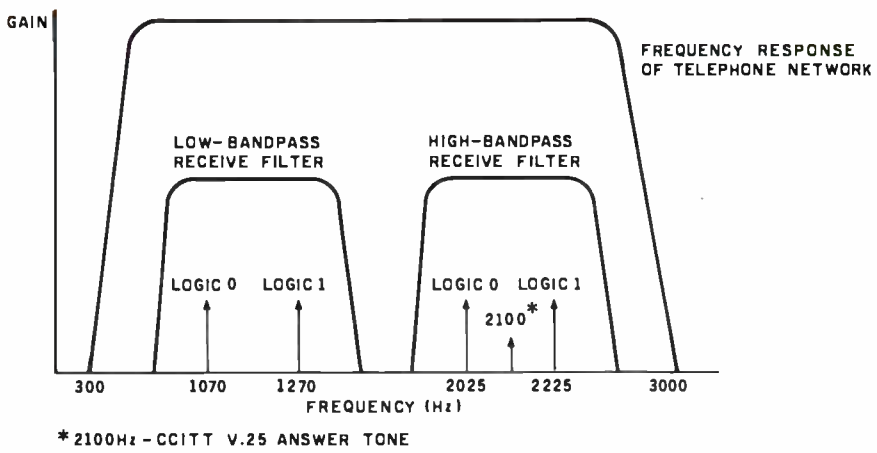

Figure 1: *Frequency spectrum used by low-speed Bell-103-compatible modems for data communication over voice-grade telephone lines. For full-duplex operation, two distinct passbands are used, one for data passing in each direction. The modulation technique used is phase-continuous frequency-shift keying.*

of tone frequencies to indicate 1 and 0. (From the previous discussion of FSK, you will recall that the transmission of one tone at a given frequency signifies a logic 1 and that a tone at a certain other frequency signifies a logic 0.) Use of two sets of tones allows *full-duplex* communication, in which information moves in both directions at once over a single pair of wires.

The modem operating in originate mode transmits using the originate set of tones (1070 Hz for a 0 and 1270 Hz for a 1). The modem operating in answer mode transmits using the answer tones (2025 Hz for a 0 and 2225 Hz for a 1). In receiving, each modem listens for the tones being used by the other modem. The logic-1 frequency is sometimes called the *mark* tone, and the logic-0 frequency is then called the *space* tone. Figure 1 shows the telephone-line passband and the relationship of the two sets of tones.

Almost universally, if you are dialing a large computer network, your terminal is considered the originating terminal, and therefore your modem need only operate in originate mode. A modem that can do only this is called an "originate-only" modem. If you wish your equipment to be able to answer calls from an originate-mode modem, you need a modem capable of operating in answer mode.

If the other party is willing and able to establish the link but still use answer frequencies, you could receive calls on an originate-only modem. (The choice of which modem uses which mode is arbitrary as long as they don't both try to use the same

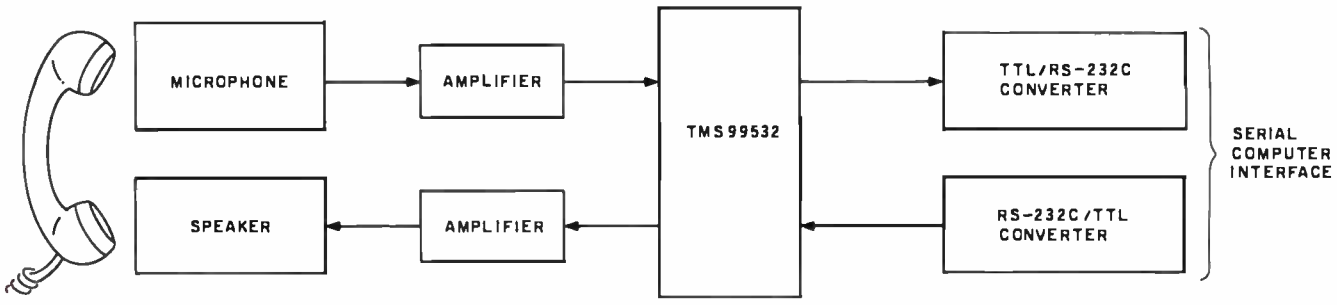

Figure 2: *Block diagram of the Circuit Cellar ECM-103 modem, which is designed around the Texas Instruments TMS99532 integrated circuit.*

www.americanradiohistory.com

mode.) So owning an originate-only modem doesn't put you at a major disadvantage, but a unit that can operate in both modes, an *originate/answer modem*, is more flexible. The ECM-103 presented for construction here is such an originate/answer modem.

Design of the ECM-103

The Circuit Cellar ECM-103 300-bps modem is built around the Texas Instruments TMS99532 FSK modem chip, which allows the modem to achieve a new plateau of elegance and reliability. The ECM-103 uses significantly fewer components than most modems presently available and is simple enough for the casual hobbyist to assemble (see photo 2). I've arranged for The Micromint to produce a kit for building the ECM-103.

Completely crystal-controlled, the ECM-103 requires no calibration or adjustments. Although designed for acoustical coupling to a telephone handset, the modem also lends itself to direct telephone-line connection through an FCC- (Federal Communications Commission-) registered protective circuit, a so-called DAA (data-access arrangement). A 600-ohm matching transformer for connection to the DAA is available in the parts list. The ECM-103 is connected to its associated computer or video terminal (its data-terminal equipment) through an RS-232C-compatible interface.

Figure 2 is a block diagram of the ECM-103. The distinctive modem functions are all contained in the TMS99532; the other parts of the circuit serve to interface the TMS99532 to either the acoustic coupler or the computer.

Figure 3 is the schematic diagram of the ECM-103. The four integrated circuits in the modem work as follows. IC1 is the TMS99532. Component IC2 (an MC1458) is a dual operational amplifier (op amp). One half of it amplifies the signals received from the microphone next to the handset's earpiece, while the other half amplifies the FSK output from the TMS99532 to drive a speaker under the telephone mouthpiece. IC3 (an MC1488) and IC4 (an MC1489) serve chiefly as level-shifters to convert the digital circuitry's TTL (transistor-transistor logic) voltages to the ±12-V (volt) levels required for RS-232C communication. One section of IC3 is used to drive the carrier-detect LED (light-emitting diode). Switch SW1 selects the answer or originate operating mode.

Number	Type	+5 V	GND	−12 V	+12 V	−5 V
IC1	TMS99532	5	18		14	11
IC2	MC1458			4	8	
IC3	MC1488	14	7			
IC4	MC1489		7	1	14	

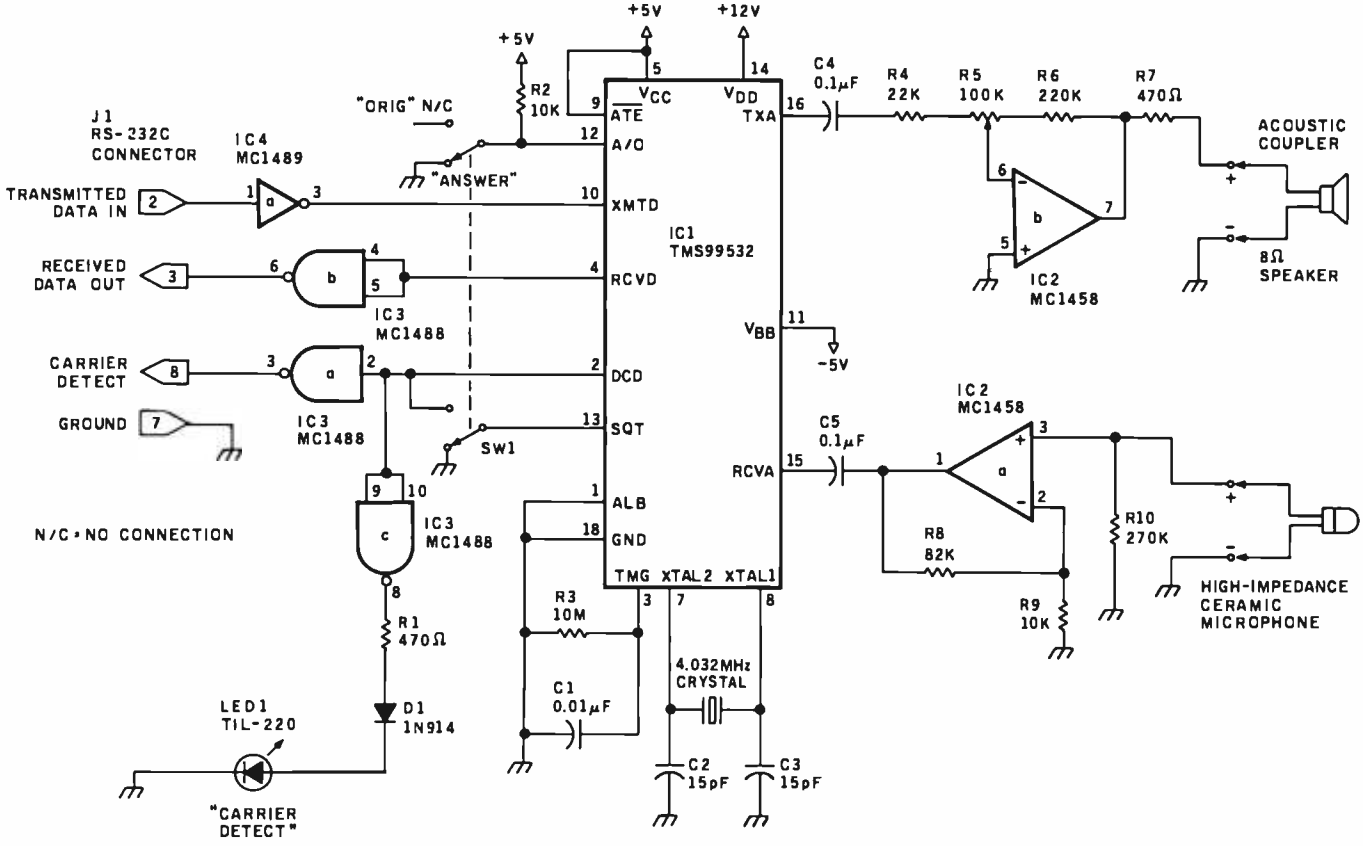

Figure 3: *Schematic diagram of the ECM-103. Four voltages are required to power the unit; no power-supply components are shown in this figure.*

www.americanradiohistory.com

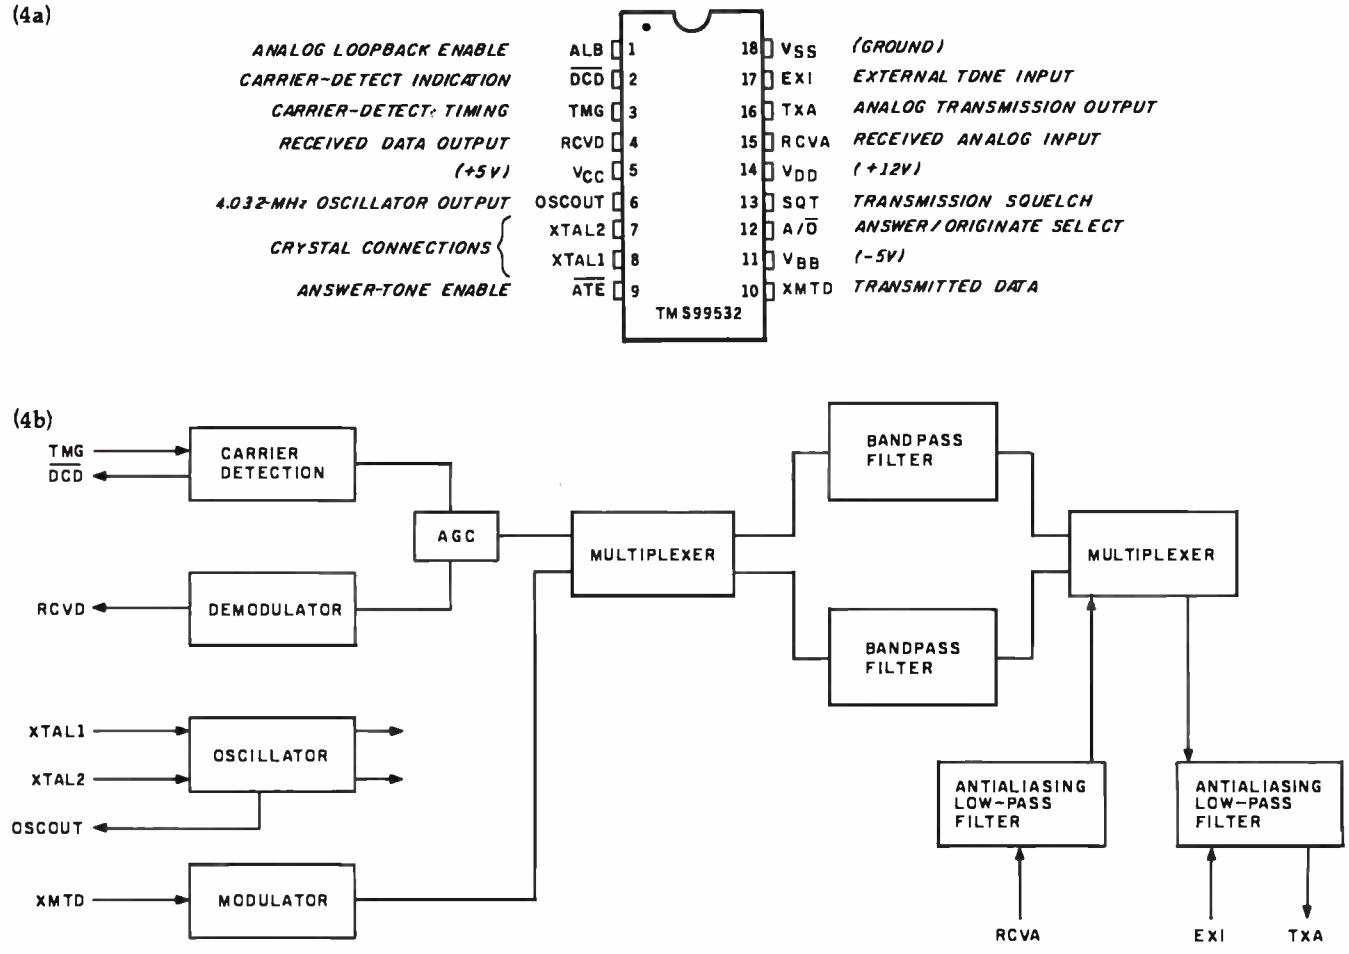

Figure 4: *Pinout specification (a) and functional block diagram (b) of the TMS99532 modem chip.*

Not shown in the schematic is the four-voltage power supply. The TMS99532 requires three voltages: +5 V, −5 V, and +12 V, while an additional −12-V supply is required by the MC1458 and MC1488. An external three-voltage power supply can be used if an onboard voltage converter (−12 V to −5 V) is installed in the modem. (This approach was taken in the kit version, which requires the input of only +5 V, +12 V, and −12 V for operation.)

Figure 4 shows a pinout specification and block diagram of the TMS99532 modem chip. The LSI (large-scale integration) NMOS (negative-channel metal-oxide semiconductor) technology of the TMS99532 enables it to contain all the necessary modulation, demodulation, and filtering circuitry required to form the heart of a modem. Its use eliminates many standard discrete components, reducing the size and increasing the reliability of modem designs.

The transmit FSK-modulator section is *phase-continuous*, that is, the phase of the transmitted signal remains constant during a frequency shift. The mark (logic 1) and space (logic 0) frequencies are derived from the clock circuit. Whether the answer or originate frequencies are transmitted is determined by the logic level on the A/$\overline{O}$ select line (pin 12). The frequency shifting of the output is controlled by the data arriving through the XMTD line (pin 10). The modulator's output, bandpass-filtered to eliminate noise, makes its way to the outside world via the TXA line (pin 16).

The TMS99532 uses a 4.032-MHz crystal to generate the four reference frequencies used by the digital filters.

The demodulator includes two stages of filtration: two primary antialiasing filters, each of which feeds two secondary narrow-bandpass digital filters centered on the particular mark and space frequencies. One primary filter is centered on 1170 Hz (to pass received originate-mode tones) and the other on 2125 Hz (allowing answer-mode tones to pass).

The TMS99532 uses a 4.032-MHz crystal to generate the four reference frequencies (both sets of mark and space tones) used by the digital filters. In either operating mode, one set is used to sample the analog input signals (from the chip's RCVA input, pin 15) through a switched capacitor-filter network, while the other set

www.americanradiohistory.com

generates the carrier signals in the transmit modulator.

In the receiving process, the outputs of the digital mark and space filters are full-wave rectified and their levels are compared. If the signal coming from the mark filter is greater in amplitude than the space filter's amplitude, the received data is interpreted as a logic 1 (or vice versa). The input from the microphone is attached to the RCVA input (pin 15), and the demodulated data comes out on the RCVD output line (pin 4).

The TMS99532 has a carrier-detect function that allows separate time-out intervals for acquisition and loss of signal. For a valid carrier-detect signal to be generated, the TMS99532 must receive a mark signal of detectible amplitude during the interval selected as the carrier-detect turn-on time. After a mark-state carrier has been detected, the signal must fall below the carrier-detect turn-off threshold for a predetermined turn-off interval before the Data Carrier Detect output (pin 2) indicates loss of signal. The turn-on and turn-off times are preset by the connection of a resistor/capacitor combination to the TMG input (pin 3). In designing the ECM-103, I chose a 10-megohm resistor and a 0.01-microfarad capacitor to provide a turn-on carrier-detect interval of approximately 75 ms (milliseconds) and a turn-off time of approximately 25 ms.

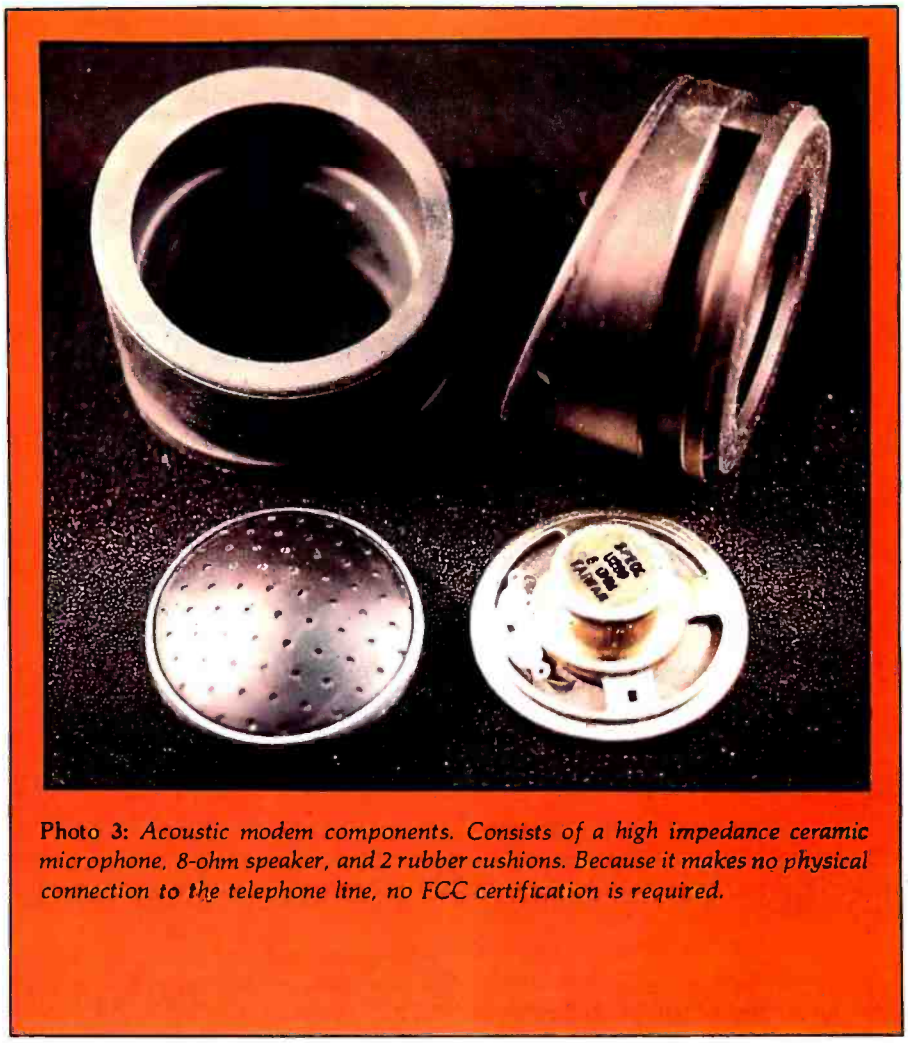

Photo 3: *Acoustic modem components. Consists of a high impedance ceramic microphone, 8-ohm speaker, and 2 rubber cushions. Because it makes no physical connection to the telephone line, no FCC certification is required.*

Acoustic-Coupler Interface

The easiest and simplest way of making the physical connection from the ECM-103 modem to the telephone line is to use an *acoustic coupler*. This apparatus is in essence just a speaker and a microphone that "talk" through a standard telephone handset. While direct connection to the telephone lines has technical advantages, acoustic coupling is convenient and does not require FCC approval.

Construction of a serviceable acoustic coupler is really quite simple; I described the process with detailed photographs in my previous modem article (reference 2). You need only common, easy-to-find materials and a modicum of dexterity to assemble the device.

If you prefer the professional look in your projects and want to guarantee top performance, I recommend the acoustic-coupler kit available from The Micromint. It uses rubber cushions specially designed for a tight fit on the telephone handset and a ceramic microphone specifically designed for use in modems (see photos 3 and 4). Interestingly enough, as I was working on the ECM-103, the folks at The Micromint informed me that they had received a large order for acoustic-coupler parts from Texas Instruments itself, where someone was apparently also prototyping a number of TMS99532 projects.

A 300-bps modem can neatly serve most needs for everyday data communication.

In Conclusion

Today, the need for one computer to be able to talk to other computers is apparent without much explanation. The proliferation of automatic bulletin-board systems, timesharing services, and business data services dependent upon data communication has touched most computer users.

For the average casual computer user or experimenter, a 300-bps Bell-103-compatible modem is generally adequate and is considered standard equipment. The prices of 1200-bps units are still very high, but I expect that they will eventually come down, and as a consequence more people will begin to use 1200-bps modems. (As soon as it becomes cost-effective,

www.americanradiohistory.com

Photo 4: *Finished modem prototype.*

there will be a Circuit Cellar project to build a 1200-bps modem.) But for now, a 300-bps modem can neatly serve most needs for everyday data communication.

The ECM-103 uses the latest LSI technology and is a considerable improvement over previous designs. Because it is crystal-controlled and uses no external filtering or frequency-set-point components, it offers substantially improved performance and long-term reliability. The TMS99532 is a relatively new chip and as such is very expensive. Because of this, I have limited the complexity of the ECM-103 so that even with the other components it is still economical to build.

Next Month:

After you've built the modem, you'll need to connect it to your computer or terminal. In April, we'll look at a "break-out box," a diagnostic aid for making RS-232C connections work. ■

To receive a complete list of Ciarcia's Circuit Cellar project kits available from the Micromint, circle 100 on the reader service inquiry card at the back of the magazine.

References

1. Bingham, John. "Understanding Modulation Methods." *EDN*, July 16, 1982, page 352.
2. Ciarcia, Steve. "A Build-It-Yourself Modem for Under $50." August 1980 BYTE, page 22.
3. Parsons, Ronald G. "An Answer/Originate Modem." June 1980 BYTE, page 24.
4. Skjellum, Anthony, and Richard S. Shuford. Letter and Reply: "In Search of Faster Modems." June 1982 BYTE, page 42.

Editor's Note: *Steve often refers to previous Circuit Cellar articles as reference material for each month's current article. Most of the past articles are available in reprint books from BYTE Books, McGraw-Hill Book Company, POB 400, Hightstown, NJ 08520.*

Ciarcia's Circuit Cellar, Volume I *contains the articles that appeared in BYTE from September 1977 through November 1978.* Ciarcia's Circuit Cellar, Volume II *contains the articles from December 1978 through June 1980.* Ciarcia's Circuit Cellar, Volume III *contains the articles that were published from July 1980 through December 1981.*

The following items are available from:

The Micromint Inc.
561 Willow Ave.
Cedarhurst, NY 11516
(800) 645-3479 (for orders)
(516) 374-6793 (for information)

1. ECM-103 modem kit: Comes complete with all components, printed-circuit board, RS-232C and power connectors, TMS99532 chip, and assembly manual. Requires acoustic coupler and power supply, not included.
Complete kit.....$60

2. Acoustic-coupler kit: Includes 2 rubber cushions, a 2-inch 8-ohm speaker, and a 2-inch ceramic microphone.
Complete kit.....$18

3. 600-ohm matching transformer for connecting to a DAA in direct-connect applications.....$9

4. Universal three-voltage power-supply kit (size: 2.1 by 4.5 inches) Provides +5 V at 300 mA, +12 V at 50 mA, −12 V at 50 mA.
Complete kit.....$27

All printed-circuit boards are solder-masked and silk-screened and include a user's manual.

Prices include shipping and handling charges in the continental U.S.; please add $10 for orders from anywhere else.

Residents of New York State please include 7 percent sales tax.

www.americanradiohistory.com

MDBS III™
Mainframe-quality DBMS from
Micro Data Base Systems, Inc.
International Software Enterprises—USA
(312) 981-9200

ACCOUNTING PLUS™
A comprehensive microcomputer
business accounting system.
SOFTWARE DIMENSIONS, INC.
(916) 722-8000

QUICK CHECK™
Instant Answers for Money Matters,
Bookkeeping/Accounts/Inventory
CHUCK ATKINSON PROGRAMS
(817) 249-0166

INMASS™
Integrated Manufacturing and
Accounting Software System
MICROCOMPUTER CONSULTANTS
(916) 756-8104

DATA COMMUNICATIONS
SOFTWARE
ASYNC, BISYNC & SNA-SDLC protocol
data communications software.
IE Systems, Inc. & Micro-Integration, Inc.
(603) 659-5891



PC/FORTH™
Program development systems for Z-80
and 8086/88 microcomputers
Laboratory Microsystems, Inc.
(213) 306-7412

WHEN YOU BUY THE RIGHT SOFTWARE, YOU CAN'T GO WRONG ON THE HARDWARE.

CP/M® compatible software—for maximum work power on more than 600 computer models.

All the computers in the world won't help you without smart software. That's why we're showing some of the best software products you can buy, from solid, innovative companies. They're shown here together because they're all CP/M compatible. CP/M is the universally accepted operating system created by Digital Research that allows software products like these to run on more than 600 different computer models including the biggest names in hardware. So, to get smart software for your system, call one of the fine Independent Software Vendors listed above or to find out how CP/M can increase productivity in your world, contact Digital Research at (408) 649-5500.

DIGITAL RESEARCH™
The creators of CP/M™

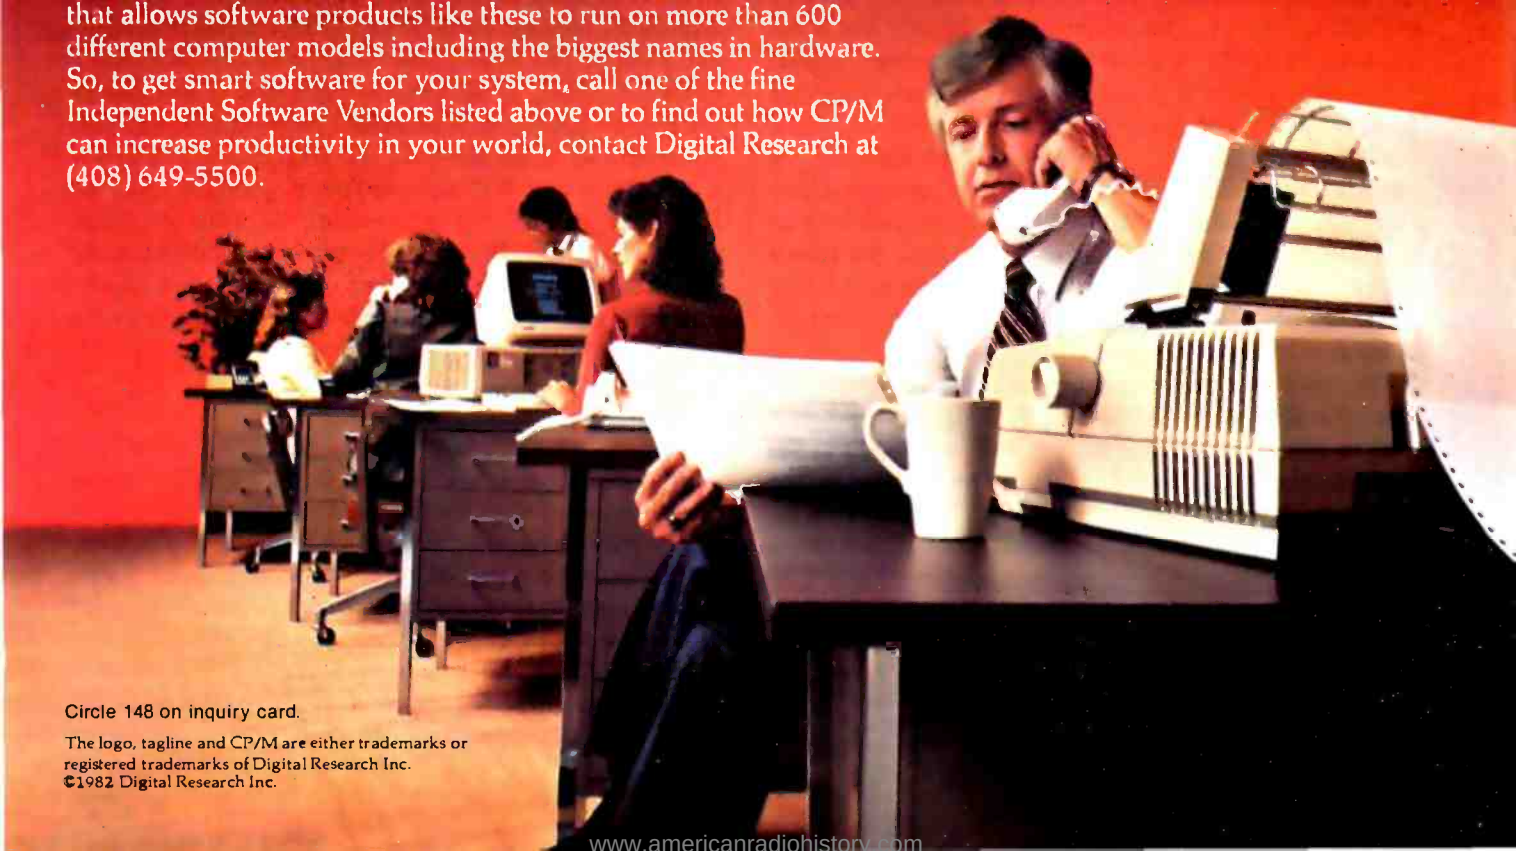

Circle 148 on inquiry card.

The logo, tagline and CP/M are either trademarks or registered trademarks of Digital Research Inc.
©1982 Digital Research Inc.

www.americanradiohistory.com

The Enhanced VIC-20
Part 2: Adding a 3K-Byte Memory Board

Joel Swank
12550 SW Colony #3
Beaverton, OR 97005

OUT OF MEMORY is one of the most annoying error messages you can get. It usually happens just when you've almost finished writing that essential program. This article, the second in the Enhanced VIC-20 series, will show you how to prevent this problem by adding more memory to your microcomputer.

Essentially, the addition of memory fills a "gap" in the VIC's memory. The memory circuit is relatively simple, but building the board demands a certain amount of experience with electronic components.

As supplied by Commodore, the VIC-20 comes with 5K bytes of programmable RAM (random-access read/write memory) which is logically divided into two sections. One kilobyte (four pages) is located at the low end of the VIC memory space spanning addresses 0–1023 ($0–$3FF hexadecimal). This block of memory is used by the VIC control program (called the KERNAL) and is not available to BASIC programs. The 6502 microprocessor, which controls the VIC, requires that page zero (0–255 or $0–$FF) be used for direct-page machine instructions and that page one (256–511 or $100–$1FF) be used for the hardware stack. The KERNAL program uses pages two and three (512–1023 or $200–$3FF) to store such important VIC data as vectors, current color, and the screen buffer location. The keyboard input buffer and the tape buffer are also located there. Almost all of the first 1K bytes of memory are dedicated to some use.

The other 4K bytes of memory on the standard VIC are located at 4096–8191 ($1000–$1FFF). This RAM, which is used to hold the BASIC program and variables and the screen buffer, has a special use. It can be accessed by the 6560 video interface chip (hence VIC). The 6560 is the integrated circuit (IC) in the VIC that creates the color images that are sent to the screen. Special circuitry allows both the microprocessor and the video interface chip to access this 4K-byte block of RAM. It is the only RAM in the system that can contain the screen buffer and alternate character sets. This block of RAM must occupy a 4K-byte boundary. That's why it's located at 4096 ($1000) instead of 1024 ($400), leaving a 3K-byte gap in RAM at 1024–4095 ($400–$FFF). Filling this memory gap with RAM will expand the VIC's memory to 8K bytes. Commodore offers two memory cartridges that fill this gap: the 3K-byte Memory Expander and the Super Expander.

The KERNAL program checks for the presence of RAM at 1024 ($400) during power-up initialization. If RAM is present, it is used by BASIC. BASIC will then display the message 6655 BYTES FREE instead of the normal 3583 BYTES FREE. That makes available 3072 more bytes for BASIC programs and variables. It also moves the start of BASIC to 1024 ($400), which frees the RAM in the special video block for use with special characters and lets you use full high-resolution graphics. (See the VIC users manual for information on high-resolution graphics.) The VIC LOAD command automatically relocates BASIC programs when they are loaded, so any programs you save on a 5K-byte VIC will also work on an 8K-byte VIC.

Design

A 3K-byte RAM board must be connected to the VIC via the expansion connector slot in the right rear of the case. Inside this slot is a standard 44-pin card-edge connector with contacts on 0.156-inch centers. This connector will accept a standard industry card-edge plug. Commodore cartridges consist of a printed circuit (PC) board to which a plastic case is bolted. The case helps to guide the edge of the PC board into the connector. You can also insert a board without a case if you carefully align the board and the connector.

Editor's Note

The VIC-20 is one of the new breed of low-cost computers that offer a surprising amount of computing power for the money. But its low cost also means that it lacks some of the features we've come to take for granted. In this series of articles, author Joel Swank will "enhance" the VIC-20 and in so doing increase the utility of this very interesting computer. . .S.J.W.

Circle 239 on inquiry card. ⟶

www.americanradiohistory.com

KEY TRONIC POLISHES THE APPLE II* KEYBOARD

Eleven Function Keys Streamline Multiple Key Operations

Full Shifting Capability

Keys in Familiar Typewriter Locations

Numeric Pad

Eight Single Key Cursor Movements

Enhance your APPLE II* Computer System with a Key Tronic keyboard peripheral.

This detached, low-profile keyboard is plug-compatible with the existing keyboard socket of the Apple II. It also features reliable microprocessor electronics, solid-state capacitance switches, and positive tactile feedback.

Price: $298.00, includes shipping & handling. To Order Model KB-200 Call Toll Free 1-800-262-6006 (8 a.m.- 4 p.m. Pacific Standard Time).

Come see us at Comdex, Booth #2256.

key tronic™

THE RESPONSIVE KEYBOARD COMPANY

DEPT. E1 • P.O. BOX 14687 • SPOKANE, WASHINGTON 99214 USA

*Apple II is a registered trademark of Apple Computer, Inc.

www.americanradiohistory.com

VIC Expansion-bus Pin Assignments

Pin #	Use	Pin #	Use
1	GND	A	GND
2	CD0	B	CA0
3	CD1	C	CA1
4	CD2	D	CA2
5	CD3	E	CA3
6	CD4	F	CA4
7	CD5	H	CA5
8	CD6	J	CA6
9	CD7	K	CA7
10	$\overline{BLK1}$	L	CA8
11	$\overline{BLK2}$	M	CA9
12	$\overline{BLK3}$	N	CA10
13	$\overline{BLK5}$	P	CA11
14	$\overline{RAM1}$	R	CA12
15	$\overline{RAM2}$	S	CA13
16	$\overline{RAM3}$	T	$\overline{I/O2}$
17	VR/W	U	$\overline{I/O3}$
18	CR/W	V	S02
19	$\overline{IRQ}$	W	$\overline{NMI}$
20	NC	X	$\overline{RESET}$
21	+ 5VDC	Y	NC
22	GND	Z	GND

Table 1: *VIC expansion-bus pin assignments using the nomenclature in the VIC users manual.*

VIC Expansion-bus Select Lines

Signal	Space	Addresses	Intended Use
$\overline{BLK1}$	8K	$2000–$3FFF	RAM EXPANSION
$\overline{BLK2}$	8K	$4000–$5FFF	RAM EXPANSION
$\overline{BLK3}$	8K	$6000–$7FFF	RAM EXPANSION
$\overline{BLK5}$	8K	$A000–$BFFF	ROM CARTRIDGE
$\overline{RAM1}$	1K	$400–$7FF	RAM EXPANSION
$\overline{RAM2}$	1K	$800–$BFF	RAM EXPANSION
$\overline{RAM3}$	1K	$C00–$FFF	RAM EXPANSION
$\overline{I/O2}$	1K	$9800–$9BFF	I/O EXPANSION
$\overline{I/O3}$	1K	$9C00–$9FFF	I/O EXPANSION

Table 2: *VIC expansion-bus external select lines, their address ranges and intended use.*

Page 150 of the VIC users manual shows the signals on each pin of this connector. Table 1 lists the pin numbers and their signals. The 6502 microprocessor uses these signals, which are collectively called a bus, to communicate with all parts of the system. The memory-expansion port is not the entire 6502 bus because the two high-order address lines are missing. But all standard 6502 control and data lines are present, along with nine select lines. A select line exists for each unused block of the VIC address space. Table 2 shows the select lines and their corresponding address ranges. (Note that there is an error on page 150 of the users manual. The two select lines I/O2 and I/O3 (pins T and U), like all the other select lines, are negative logic signals. They should be shown with a line or bar over them.)

Figure 1 shows the schematic for a 3K-byte RAM board that will plug into the VIC expansion bus. Implementing a 3K-byte RAM board is very simple because no external decoding of the address lines is needed. The VIC provides a select line for each 1K bytes of RAM in the range 1024–4095 ($400–$FFF).

I chose 2114 static RAM ICs for my board, the same parts used for VIC's 5K bytes of memory. Each 2114 contains 4K bits organized as 1K of half bytes or nybbles. Each 1K bytes of RAM require a pair of 2114s. One 2114 contains the high-order nybble of each byte, and the other contains the low-order nybble. Six 2114s are needed for 3K bytes of RAM. Each pair is selected by one of the RAM select lines.

Construction

Although the logic of the 3K-byte board is simple, constructing it is more complicated. The pin numbers shown in both the VIC users manual and table 1 do not use the standard industry nomenclature for the 44-pin card-edge connector. It's actually a mirror image of the industry standard. If you buy a plugboard or a connector whose pins are marked, they won't match the VIC pin numbers. (I almost wired my board wrong before I realized that.) I guess Commodore used this numbering scheme to be consistent with the rest of the connectors on the back of the VIC. Table 3 lists the VIC pin assignments in standard nomenclature.

The dimensions of the expansion-interface slot also present a problem. A PC board plugged into the VIC expansion connector has only 1/8-inch clearance below and 5/8-inch clearance above the edges of the slot. This clearance is no problem if you're using an etched printed-circuit board, but most people who build their own boards use one of the wire-wrapping methods of construction. Wire wrapping requires space below the board for wrap posts and wires.

To work around the physical constraints, I built my board upside-down. That is, I built the board so that it would plug into the VIC with the components facing down and the wire-wrap pins facing up. To make the scheme work, I had to leave the first 2½ inches of the board bare, which brings all components and wiring outside the VIC case (see photo 1). The 5/8-inch clearance above leaves room to install wires to bring the signals out to the components. It looks a little strange, but it works well. It also means you have to use a third pin-assignment nomenclature. Table 4 shows the VIC upside-down bus pin assignments.

Once you have the pin assignment nomenclature down, constructing the board is fairly straightforward. I have used Vector Electronic Company's Slit-N-Wrap

Circle 352 on inquiry card. ⟶

www.americanradiohistory.com

High Resolution RGB Color Monitor Designed for the IBM Personal Computer

FEATURES

- ☐ 80 characters x 25 lines
- ☐ 690 dots horizontal resolution
- ☐ 16 colors
- ☐ .31 mm dot pitch tube
- ☐ non-glare, black matrix
- ☐ plugs directly to IBM PC, cable supplied
- ☐ FCC Class B Approved

Princeton Graphic Systems' new HX-12 high resolution color monitor is designed with an NEC.31 mm dot pitch CRT to give you up to 690 dots horizontal resolution. You need not compromise the display quality of your system with monitors rated at less than the 640 horizontal dots generated by your IBM PC. The PGS HX-12 delivers 16 super colors, 80 characters x 25 lines. It is the best price/performance PC direct drive monitor in the market today. Get the PGS HX-12 and discover for yourself how well it complements your IBM Personal Computer.

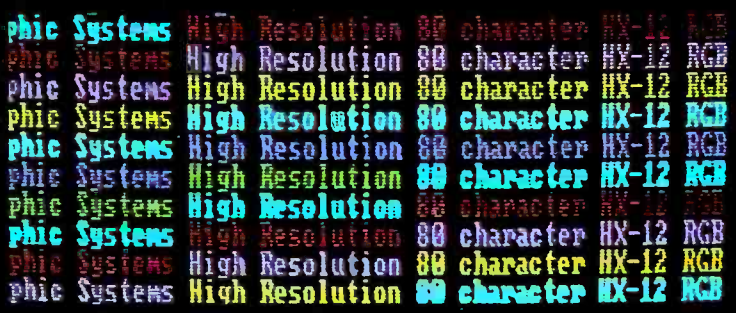

80 character display

PGS **Princeton Graphic Systems**

1101-I State Road ☐ Princeton, New Jersey 08540 ☐ (609) 683 1660 ☐ TLX: 685 7009 PGS Prin.

www.americanradiohistory.com

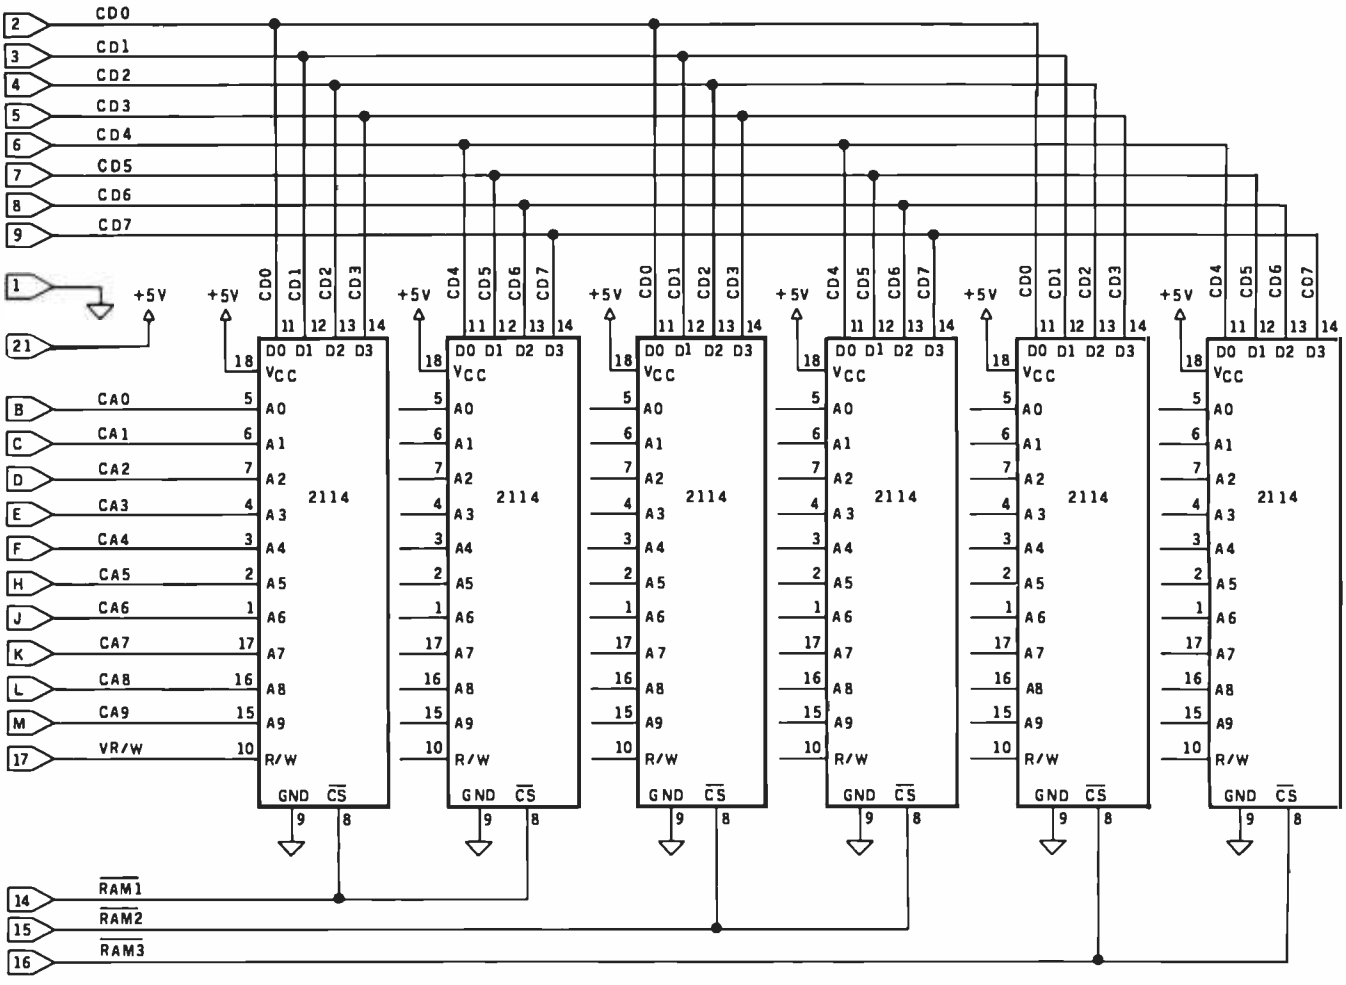

Figure 1: *Schematic diagram of the VIC 3K-byte RAM board. The connector numbers on the left match the VIC expansion-bus pinouts shown in both table 1 and the users manual.*

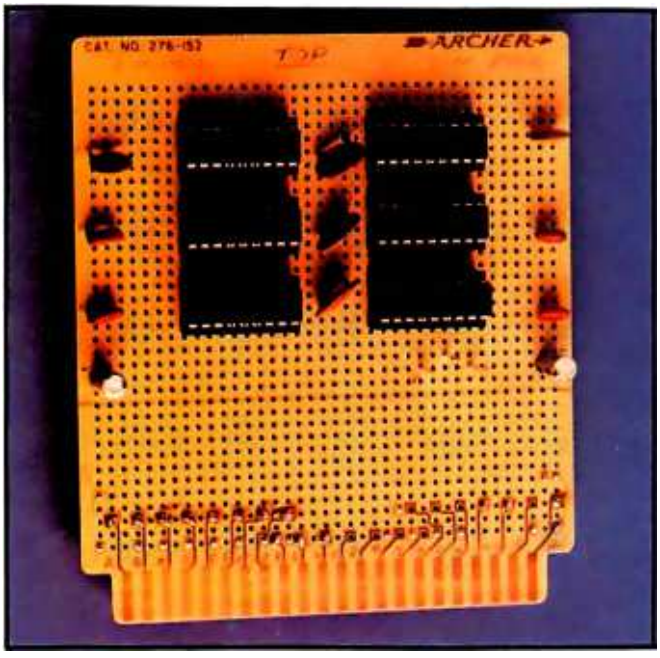

Photo 1: *A 3K-byte RAM board for the VIC-20 computer. This view shows the component side of the board and the parts layout. The circuit wiring, done with wirewrap technique, is on the opposite side.*

method of construction for years with good results. Standard wire wrapping or the newer Just Wrap method from OK Machine and Tool Corp. should also produce good results. A variety of distributors sell wire-wrap sockets and individual wrap posts. I wrap all connections except the power and ground connections. For those I use point-to-point soldering so that I can use heavier gauge wire than the 28-gauge required for the Slit-N-Wrap method. It's a good policy to put a 10-μF electrolytic capacitor across the power and ground lines near the edge connector and to put a 0.1-μF ceramic-disk bypass capacitor next to each IC on the board from the power-supply line to ground. Whichever construction method and pin nomenclature you use, it's a good idea to mark the board and the VIC so that you never insert the board backward.

Testing

When you plug the 3K-byte RAM board into the VIC and turn it on, you should see the message 6655 BYTES FREE. If you don't, there's an error on the board. The VIC does a memory test at power-up. If it detects an error, it fills the screen with a random pattern of characters and colors and refuses further communication. Even if you get the proper message, you can't be sure that the

www.americanradiohistory.com

GREAT IDEAS... Down to Earth Products

(Available Soon)

SDS-ZS10/4
4 RS232 Channels
Full Duplex
Real Time Clock

SDS-HARD DISK INTERFACE
Micropolis 1220 Series
or ST-506
Interface Adapter

A Shining New Star

NEC-FLOPPY DISK DRIVE
Double Sided
Single Density/Double Density
Up to 2.4 Megabyte
(Qume Now Available)

• 5¼" Hard Disk
• 96 TPI Floppy

• 6 Slot S-100 Mainframe
See page 402 for details

SDS-MULTIPLEXER/DISPLAY
Three RS232C 1 to 2 Switches
Two Seven Segment Status Display
(Can be used as a line monitor for data communications link)
(route RS232 to one of two devices)

*** TURBODOS TANDEM**

SDS-MASTER

SDS-SLAVE

SDS-SINGLE BOARD COMPUTERS
Z80 CPU 64K Bank Switch Memory
2 RS232 Channels 4 Timers IEEE 696 Buss
4 Parallel ports
NEC 765 FDC with PLL to all Shugart compatible drives (SDS-Master only)
*CP/M 2.2 & 3.0

*CP/M Registered trademark of Digital Research
*TurboDOS Registered trademark of Software 2000

HARDWARE SOFTWARE **SIERRA DATA SCIENCES**

Fresno CA/Marketing Division
21162 Lorain Ave., Fairview Park, Ohio 44126
(216) 331-8500 Telex. 980131 WDMR

Circle 389 on inquiry card.

www.americanradiohistory.com

VIC Expansion-bus Standard Nomenclature

Pin #	Use	Pin #	Use
1	GND	A	GND
2	+ 5VDC	B	NC
3	NC	C	$\overline{\text{RESET}}$
4	$\overline{\text{IRQ}}$	D	$\overline{\text{NMI}}$
5	CR/W	E	S02
6	VR/W	F	$\overline{\text{I/O3}}$
7	$\overline{\text{RAM3}}$	H	$\overline{\text{I/O2}}$
8	$\overline{\text{RAM2}}$	J	CA13
9	$\overline{\text{RAM1}}$	K	CA12
10	$\overline{\text{BLK5}}$	L	CA11
11	$\overline{\text{BLK3}}$	M	CA10
12	$\overline{\text{BLK2}}$	N	CA9
13	$\overline{\text{BLK1}}$	P	CA8
14	CD7	R	CA7
15	CD6	S	CA6
16	CD5	T	CA5
17	CD4	U	CA4
18	CD3	V	CA3
19	CD2	W	CA2
20	CD1	X	CA1
21	CD0	Y	CA0
22	GND	Z	GND

Table 3: *VIC expansion-bus pin assignments using standard industry nomenclature. Most numbered plugboards use this nomenclature.*

VIC Expansion-bus Upside-down Nomenclature

Pin #	Use	Pin #	Use
1	GND	A	GND
2	CA0	B	CD0
3	CA1	C	CD1
4	CA2	D	CD2
5	CA3	E	CD3
6	CA4	F	CD4
7	CA5	H	CD5
8	CA6	J	CD6
9	CA7	K	CD7
10	CA8	L	$\overline{\text{BLK1}}$
11	CA9	M	$\overline{\text{BLK2}}$
12	CA10	N	$\overline{\text{BLK3}}$
13	CA11	P	$\overline{\text{BLK5}}$
14	CA12	R	$\overline{\text{RAM1}}$
15	CA13	S	$\overline{\text{RAM2}}$
16	$\overline{\text{I/O2}}$	T	$\overline{\text{RAM3}}$
17	$\overline{\text{I/O3}}$	U	VR/W
18	S02	V	CR/W
19	$\overline{\text{NMI}}$	W	$\overline{\text{IRQ}}$
20	$\overline{\text{RESET}}$	X	NC
21	NC	Y	+ 5VDC
22	GND	Z	GND

Table 4: *VIC expansion-bus pin assignments using upside-down nomenclature. This is how the signals would appear on a standard numbered board when they are inserted upside-down into the VIC.*

memory is working properly because the VIC's memory test is not thorough.

The next step is to load and run a BASIC program to see if it works. If it does, there's a good chance that the memory is okay. If you have any problems, there are a few things you should check. Look for broken wires and poor solder joints. Check all connections for proper pin numbers. Be sure not to pull wires tight across adjacent pins. Wrap posts have sharp corners that can pierce insulation. Try reseating the ICs in their sockets. As a last resort, try replacing the ICs one at a time, with spares you know to be good.

The most difficult part of expanding the VIC was figuring out the pin-assignment nomenclature and how to work around the board's physical limitations. After solving those problems, I was able to add 3K bytes of RAM for about $30 in parts and four hours of construction time.■

C compilers

HOST	6809 TARGET	PDP-11*/LSI-11* TARGET	8080/(Z80) TARGET	8088/8086 TARGET
FLEX*/UNIFLEX* OS-9*	$200.00 (without source) $350.00 (with source)	500.00	500.00	500.00
RT-11*/RSX-11* PDP-11*	500.00	200.00 (without source) 350.00 (with source)	500.00	500.00
CP/M* 8080/(Z80)	500.00	500.00	200.00 (without source) 350.00 (with source)	500.00
PCDOS*/MSDOS* 8088/8086	500.00	500.00	500.00	200.00 (without source) 350.00 (with source)

*PCDOS is a trademark of IBM CORP. MSDOS is a trademark of MICROSOFT. UNIX is a trademark of BELL LABS. RT-11/RSX-11/PDP-11 is a trademark of Digital Equipment Corporation. FLEX/UNIFLEX is a trademark of Technical Systems consultants. CP/M is a trademark of Digital Research. OS-9 is a trademark of Microware & Motorola

- FULL C
- UNIX* Ver. 7 COMPATABILITY
- NO ROYALTIES ON GENERATED CODE
- GENERATED CODE IS REENTRANT
- C AND ASSEMBLY SOURCE MAY BE INTERMIXED
- UPGRADES & SUPPORT FOR 1 YEAR

408-275-1659

TELECON SYSTEMS
1155 Meridian Avenue, Suite 218
San Jose, California 95125

Circle 421 on inquiry card.

Circle 442 on inquiry card. →

www.americanradiohistory.com

SUPERIOR GRAPHICS HAVE COME DOWN TO EARTH.



"Three Atoms" Courtesy of Greg Abram, University of North Carolina at Chapel Hill

"Aurora" By Richard Katz, Vectrix Corporation



"Integrated Circuit Design" Courtesy of Floyd J. James, University of North Carolina at Chapel Hill

"In The Beginning" By Richard Katz, Vectrix Corporation

$1995 AND THE FIRST AFFORDABLE HIGH RESOLUTION COLOR GRAPHICS MACHINE IS YOURS

VX128

• VERY HIGH RESOLUTION 672 by 480 pixels individually addressable

• EIGHT COLORS PER PIXEL 3 bit planes of memory totalling 128K graphics RAM

• ON-BOARD 16 BIT MICROCOMPUTER Intel 8088 microprocessor with additional PROM and RAM and built-in expansion capability

• 3D GRAPHICS SOFTWARE PACKAGE built-in command set includes: rotation, scaling, translation, perspective, clipping, viewport, polygon, and filled polygon

• HARDWARE LINE AND ARC GENERATION on-board VLSI graphics display controller, 1600 nanoseconds pixel drawing time

• USER DEFINABLE CHARACTER GENERATION built-in character set includes zoom, slant, and variable spacing, or upload your own character definitions

VECTRIX

• SERIAL AND PARALLEL INTERFACE 300-19.2K baud and 8 bit parallel port

• USER FRIENDLY COMMAND FORMAT supports high level language and hexadecimal transmissions

VX384

• 512 COLORS PER PIXEL 9 bit planes of memory with 384K graphics RAM

• COLOR LOOKUP TABLE 8 bit digital-to-analog converters provide a 16 million color palate

• INCLUDES ALL FEATURES of VX128 for total of $3995

• VXM HIGH RESOLUTION COLOR MONITOR RGB analog input with 24 kiloHertz scan rate, long persistence phosphor $1295

• COLOR GRAPHIC PRINTER with interface cable $1295

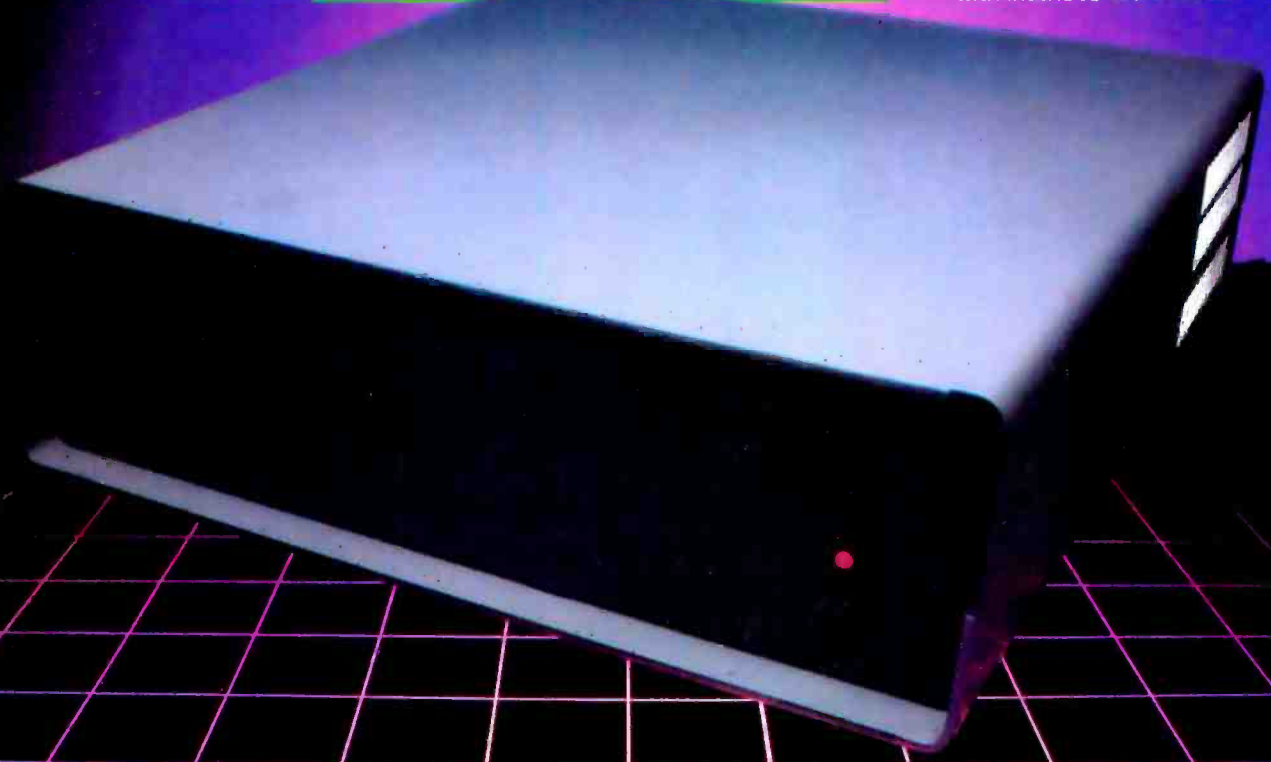

For additional information on VX128, VX384, VXM Monitor or VXP Printer call Toll Free 1-800-334-8181, or 919-272-3479, or write Vectrix Corporation, 700 Battleground Avenue, Greensboro, NC 27401

www.americanradiohistory.com

We just made owning an Atari computer a lot more logical.

www.americanradiohistory.com

Introducing the Rana 1000 disk drive. It's a whole new game for Atari computers.

This two digit LED readout displays a code that tells you everything you need to know.

This beeping button tells you your write protect feature is keeping your information safe.

The remaining buttons beep when touched, and provide readouts on density storage, error status, and drive number.

This button beeps when you touch it, and the LED readout tells you what track you're on.

When Rana Systems introduced the Elite Series of Apple® compatible disk drives, we didn't know what a tremendous impact they would make. It turned out to be a line so outstanding in performance, styling, capacity, and price, that it instantaneously made us a major force in the market. Well, needless to say, the response was so great that we were forced to create the same highly advanced disk drive for Atari.® A disk drive that when coupled with Atari's computer, could perform everything from accounting, financial planning, and stock charting, to word processing, business management, and letting you write your own programs. Plus, we made it simple enough for a child to use, for learning anything from the alphabet to a foreign language.

Working with a diskette versus playing with a cassette.

Let's face it. The only reason Atari made a cassette option to their computer was to make it affordable. But now you don't have to settle for less. Because now you can get a diskette for your Atari computer which outperforms their cassette and costs ⅓ less than their disk drive. With Atari's cassette you only get half the functions of a computer compared to what our floppy disk can give you. Their cassette is not only limited in the software available, but it also takes 20 times longer to get the information you need. And Rana's disk drive offers twice the storage capacity of either their cassette or disk drive.

Why even stylewise our new low profile design not only looks 100 times more spectacular, but it occupies 3 times less space. And our new Rana 1000 also gives you a piece of its mind every time you use it, because our disk drive gives you information as well as takes it. And we think that says a lot.

The disk drive that has all the answers.

Rana offers you a myriad of features Atari couldn't even conceive of. Like five electronic functions on the front panel that actually beep and give you a LED readout when touched. Our disk drive tells you what track you're on, and what density and how much information you're storing. It lets you switch from a single density of 90,000 letters to a double density of 180,000 letters, on a single diskette. And, we have a write protect feature which protects your diskette from being erased. In fact, no other disk drive can offer you that.

As you can see, it was easy to build a disk drive superior to Atari's. Because for every reason you buy a disk drive, Rana has superior technology.

The Rana 1000 disk drive. It brings your Atari computer to a higher level of sophistication for a price one third lower than Atari's. So your choice shouldn't even be a matter of logic.

Just common sense.

RanaSystems *Always a step ahead of the originals.*

20620 South Leapwood Avenue, Carson, CA 90746 213-538-2353. For dealer information call toll free: 1-800-421-2207. In California only call: 1-800-262-1221. Source Number: TCT-654

Available at all participating Computerland stores and other fine computer dealers.

®Apple is a registered trademark of Apple Computer, Inc. ®Atari is a registered trademark of Atari, Inc., a Warner Communications Company. See us at the West Coast Computer Show.

Circle 374 on inquiry card.

www.americanradiohistory.com

A User's View of COMDEX

The Industry Begins to Mature

Jerry Pournelle
c/o BYTE Publications
POB 372
Hancock, NH 03449

COMDEX is a big show put on mostly by manufacturers for dealers, and dealers definitely ought to attend. Users are another matter. COMDEX isn't set up for users, and paradoxically, there's too much to see. The most recent COMDEX, held in December in Las Vegas, had over a thousand exhibits and more than 40,000 attendees.

For all that, COMDEX is important. It's here that suppliers convince dealers they should handle their hardware and software products. Because everyone wants to be first with new technology, a lot of new developments are announced and shown at COMDEX. Some are the products of mature technologies, some are prototypes, and some are half-baked schemes that aren't going anywhere. For computer journalists, COMDEX is a good place to pick up background material.

My first impression of COMDEX was lines. Lines for taxis at the airport; a long and inexplicable check-in line at the Imperial Palace hotel; a line for a taxi to the Convention Center; long lines for badges; and long lines for taxis to get back to my hotel when the day was nearly over. As working press I didn't have to stand in the badge line, but that was the only one I missed.

My second feeling was dismay: there's no way to cover a thousand exhibits in three days, nor is it much easier to characterize an entire industry in a few sentences. (The *Computer Dealer*, a show newspaper published daily, ran to 168 pages!) Consequently this report will be highly personal. I saw as much as I could. I've consulted experts when possible. Still, there's much I missed, and if I've overlooked something significant, I can only apologize.

One more warning: this is a show report. It is, therefore, much more impressionistic than my User's Column. I can describe what I saw, and what I thought about it; but I am not making recommendations and won't until I can use some of this new stuff.

I can remember when the microcomputer industry consisted of little more than MITS kits and some homebrew machines; one had to be a determined hobbyist, or at least have a pioneer spirit, to become involved in "this crazy new game" back then. Now there are hundreds of computers and thousands of programs. As the market expands, vendors hope to sell to less sophisticated users. Thus have grown up the "system packagers," who combine hardware, software, and "teaching aids." I saw evidence of advances in hardware, software, and materials designed to show beginners how to use the stuff.

Hardware

The most significant hardware I saw was the Syquest "removable media Winchester." This is a 100-mm hard-disk drive that comes in a package half the height of a thin 5¼-inch floppy disk and has a removable disk cartridge called the Q-Pak. Each cartridge holds 5 megabytes formatted. The drives have the same pinouts, timing, etc. as a standard 5¼-inch Winchester and work with standard Winchester controllers, power supplies, and interfaces.

The Syquest drives sell for $800 each; the Q-Paks are $50. A few systems at the show already made use of Syquests; these typically sold a two-drive system with power supply and controller for $2500, about half again what you pay for a pair of 8-inch double-sided double-density floppies. Tecmar is offering a single-drive sys-

About the Author
Jerry Pournelle is a former aerospace engineer and current science-fiction writer who loves to play with computers.

www.americanradiohistory.com

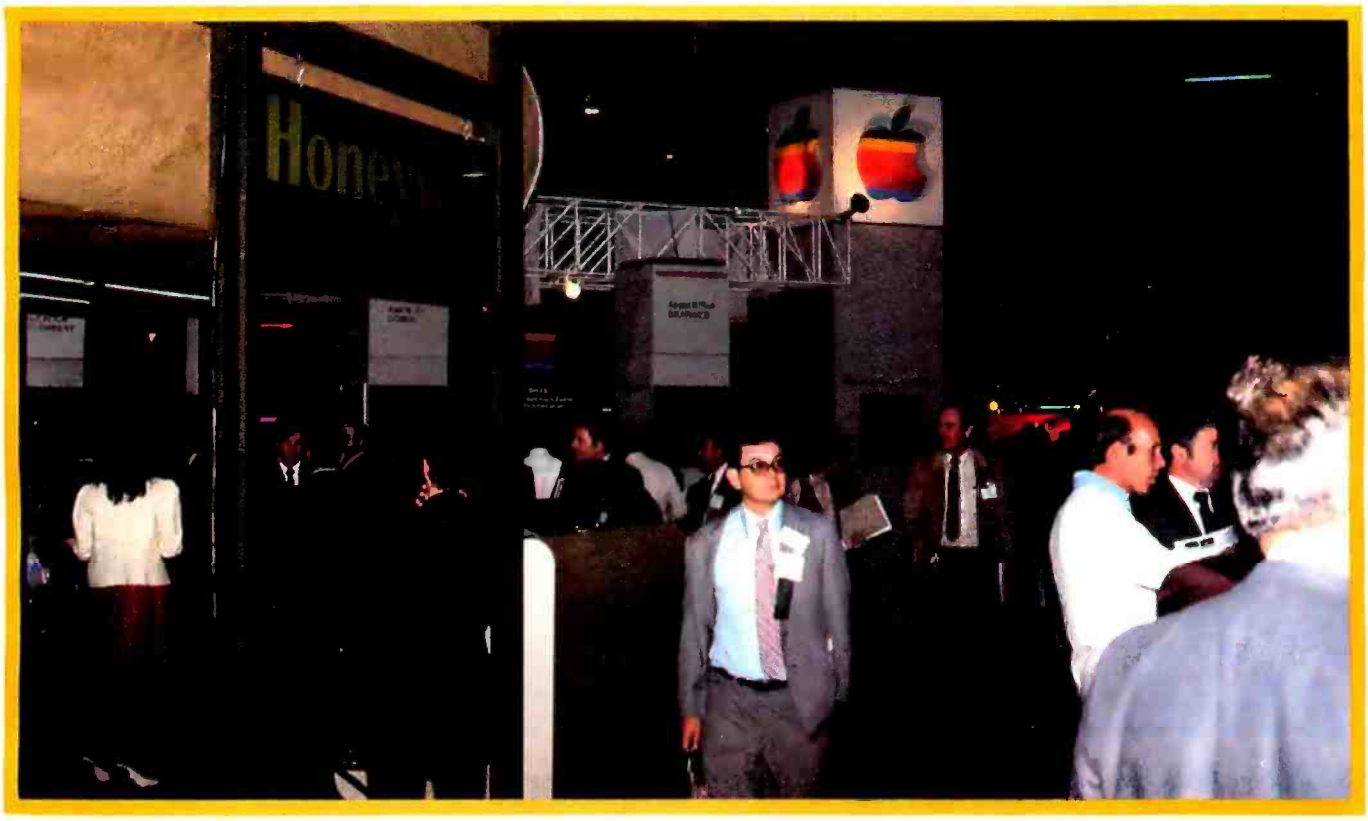

Photo 1: *Neighbors at COMDEX Honeywell and Apple Computer.*

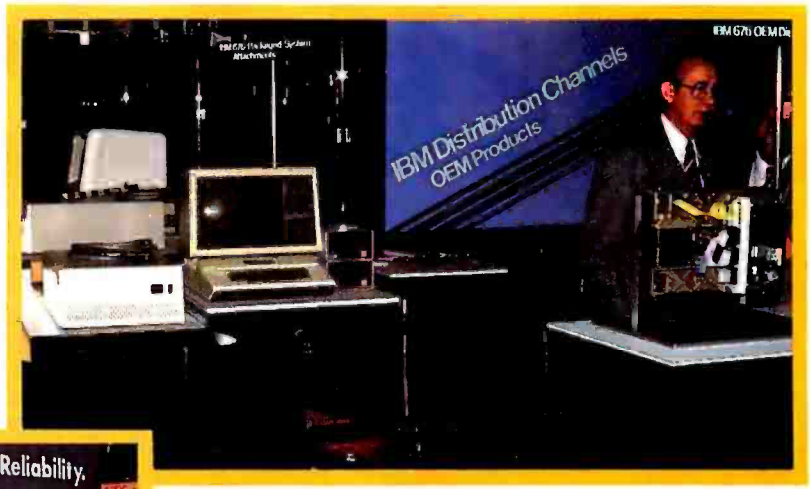

Photo 2: *A sight we all thought we'd never see. A "foreigner" at the IBM display booth. IBM now makes equipment that can be used by Apple computers.*

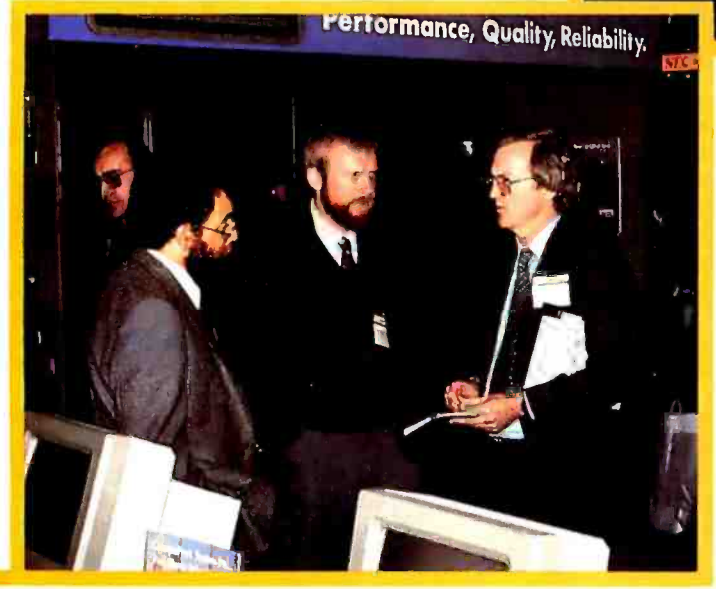

Photo 3: *COMDEX is a wonderful place to meet people (left to right): Compupro President Mark Garetz; Tony Pietsch of Proteus Engineering (who builds and maintains all my computers); and BYTE's West Coast Editor Phil Lemmons.*

www.americanradiohistory.com

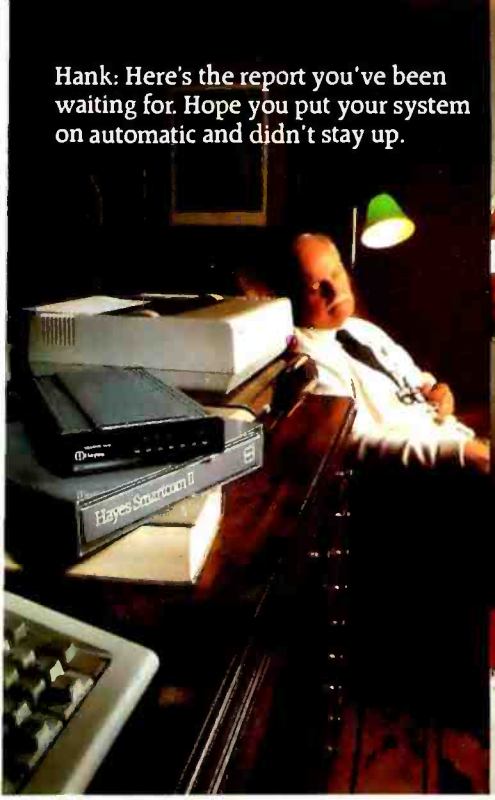

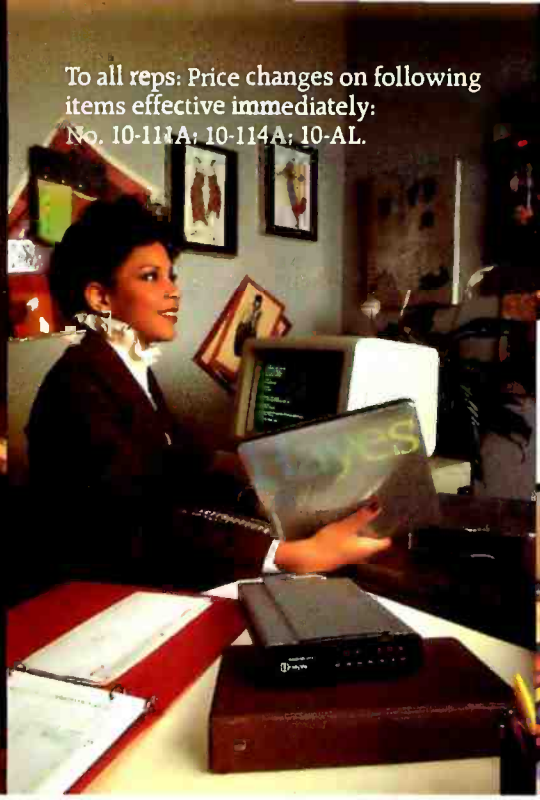

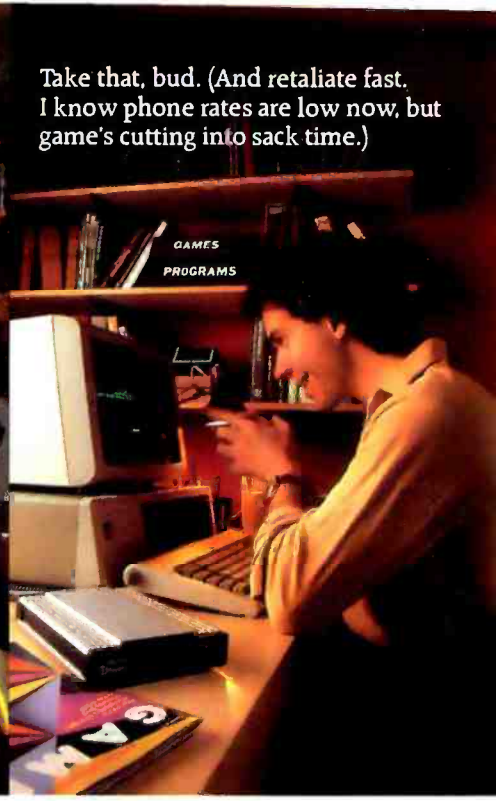

Hayes

Your computer's telephone.

Whether they're getting the jump on the latest stock reports or waging galactic wars in the middle of the night, more and more personal computer users are *communicating*. With each other. With offices. With networks, utilities and mail services all over the country.

And Hayes is providing the communications link: A first-rate telecomputing system that combines an intelligent RS-232 connect modem with a sophisticated, easy-to-use communications program.

The Smartmodem 300. Think of it as your computer's telephone. Just plug it into any phone jack, and the Smartmodem 300 sends messages to and from your personal computer, at 300 bits per second, over ordinary phone lines. Goodbye isolation. Hello world.

Your modem is the one peripheral that makes your computer a computer *system*. So it's only natural that you'd want the best modem for your money. (One that comes with a limited 2-year warranty.) The Smartmodem 300 is a wise choice. Far superior to acoustic coupler modems, which connect to the telephone receiver. And it's so easy to use.

It dials, answers and disconnects calls automatically, operating with rotary dials, Touch-Tone* and key-set systems. Plus it works at full or half duplex, which simply means that connecting to a time-sharing system, while it is a big deal, is no big deal to do.

Indicator lights let you see what your Smartmodem is doing, while an audio speaker lets you hear it. (Is the remote system down, or was the line just busy? This way, you'll know.)

Now all these extras aren't absolutely necessary. We could have gotten by without them. But at Hayes, we're not satisfied with just "getting by." That's why we made the Smartmodem 300 so—well, smart. You can even program it. In fact, we've provided one for you.

Announcing Smartcom II.™ The communications program designed by Hayes specifically for the Smartmodem. If ever there was friendly software, the Smartcom II is it!

The first time out, you'll be creating messages, sending them, printing them and storing them to disk. Simultaneously.

Likewise, when you're on the receiving end. Only you really don't need to be. With Smartcom II and your Smartmodem 300, your computer does it all, completely unattended! That's especially helpful if you're sending work from home to the office, or vice versa.

But it's just part of the story. For instance, before you communicate with another system, you need to "set up" your computer to match the way the remote system transmits data. With Smartcom II, you do this only once, the first time. After that, the information (called parameters) is stored in a directory on the Smartcom II. Calling or answering a system listed in the directory requires just a few quick keystrokes.

You can store lengthy log-on sequences the same way. Press one key, and the Smartcom II automatically executes a whole string of numbers to connect you to a utility or information service.

And if you need it, there's always "help." Even while you're on-line, the screen will display explanations about a

Hayes®

www.americanradiohistory.com

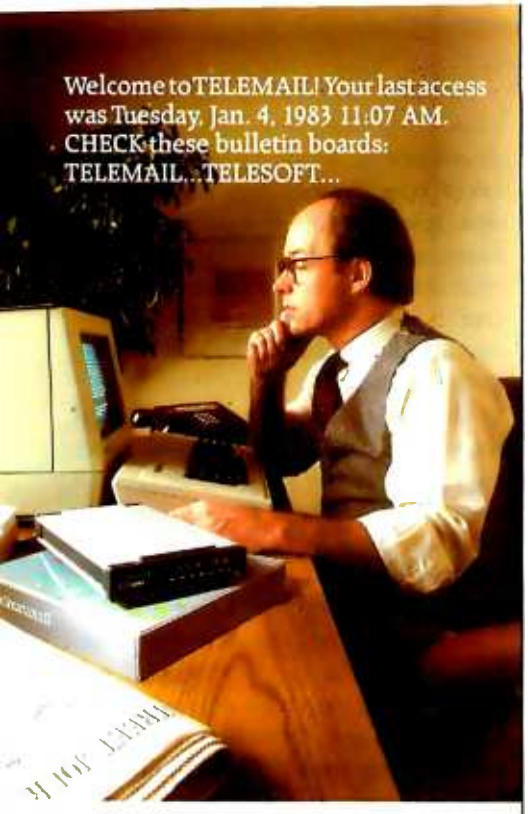

prompt, message or parameter that will get you on your way in no time.

Smartcom II also provides a directory of the files stored on your disk. You can create, display, list, name, re-name or erase any file right from the Smartcom II screen.

And now Smartcom II is available for the IBM PCand Xerox 820-II†.**

Like all our products, Smartcom II and the Smartmodem 300 are backed by excellent documentation and full support from us to your dealer.

So see him today. Link up to the exciting world of telecomputing. Get a telephone for your computer.

Hayes Microcomputer Products, Inc.
5923 Peachtree Industrial Blvd., Norcross, Georgia 30092. 404/449-8791.

Smartcom II is a trademark of Hayes Microcomputer Products, Inc.
*Trademark of American Telephone and Telegraph
**IBM is a registered trademark of International Business Machines, Corp.
†Xerox 820-II is a trademark of Xerox Corporation
©1983 Hayes Microcomputer Products, Inc.
Sold only in the U.S.A.

Circle 196 on inquiry card.

tem with controller for the IBM Personal Computer for $1795.

The second significant trend in disk technology was to microfloppy disks. Tandon, Tabor, Shugart, Sony, and others were pushing these "shirt-pocket" disks. I saw two sizes, 3¼ and 3½ inches; each has vocal defenders. I'm told, however, that a number of major manufacturers are getting together to try to agree on a standard size and format, and I hope they do.

A third trend in disk technology is the "enormous minifloppy." I saw several demonstrations of 2-megabyte double-sided double-density 5¼-inch floppy disks.

Add to this the incremental developments in the standard nonremovable Winchester hard disks—up to 40 megabytes formatted on a drive that costs no more than a 5-megabyte drive cost a year or two ago—and you can see that system designers have some decisions to make. Bill Godbout of Compupro went about looking at all the new disk systems in hopes of getting some clues as to what the future standards will be. So did George Morrow of Morrow Designs, and I'm sure they weren't alone.

I don't know what conclusions they came to. I can offer the opinion of Tony Pietsch of Proteus Engineering, the computer engineer who developed my system and who tries very hard to stay current with the state of the art.

"Flat prediction," Tony said. "Within two years, both 8-inch and 5¼-inch disk systems will be obsolete and after that they'll rapidly die out. I don't know exactly what will replace them, but it will be a combination of hard disks and shirt-pocket floppies."

Tony thinks the Syquest removable Winchester is an excellent idea, but he'd prefer to see the technology develop a bit before recommending the system to end users. Bill Godbout had the same view. Compupro will test the concept thoroughly before incorporating it into systems. The company is also working with shirt-pocket disks, and it has multimegabyte 5¼-inch systems working.

The explosion in computer technology continues. Some companies, like Altos, are moving to erase the distinction between the "big" minicomputer and the microcomputer. Altos President David Jackson is proud of his new single-board machines that offer all the power of a DEC PDP-11 for well under $20,000. Meanwhile, Compupro's Bill Godbout showed a whole line of expandable S-100 equipment, including a working processor board based on the 68000 chip, another built on the 8086 with optional "math chip" aboard, and two prototypes based, respectively, on the National Semiconductor 16-bit external, 32-bit internal 16032, and Intel's iAPX 286.

Tony Pietsch put it this way: "The 16032 is going to be a *big* machine. The internal chip architecture makes it equivalent in power to the IBM System 360 or 370. For that matter, it will be trivial to get it working like a LISP Machine." The IBM 370 is, as Tony says, big; the LISP Machine was developed at the Massachusetts Institute of Technology, primarily by Marvin Minsky, and is very important in artificial-intelligence studies. It looks as if machines equivalent to both will be available at S-100 prices within a year.

We also have the 68000 machines. Fortune was out in force. So was Sage. Both had working systems and an expanding line of software.

The 8088 chips were not neglected either. Eagle Computers, with an IBM Personal Computer work-alike, attracted a lot of attention. My favorite of those, though, is the Zenith Z-100, which has an S-100 bus and runs PC programs without making you endure the PC's maldesigned keyboard.

There was also the Basis, a European machine (but which features an American-style keyboard) that has both a 6502 chip and a Z80. I was much impressed by the Basis, and I'd advise anyone contemplating an Apple acquisition to look it over first.

And on, and on. . .

Portables

There are so many portable machines now that I can't keep track of them. It seems a new one springs up every week, and all the manufacturers of portables are trying to build

www.americanradiohistory.com

dealer and repair networks to service them.

There are flat-screen systems based on liquid-crystal displays, portable versions of the IBM Personal Computer, machines with plastic cases and machines with metal cases, machines with tiny screens and machines with larger screens. Not only can't I keep up with them, I can't even list them all.

Meanwhile, the "old" portables continue to improve. There's new software for the Kaypro. There's a new carrying case, a very nice new screen display, and new software for the Otrona. The Osborne 1 has both double-density disks and an 80-character screen as an option. As well it has the most impressive package of software and "learning tools" I've seen for any entry-level computer.

A few of the new ones I saw: the Hyperion, a somewhat portable IBM PC work-alike; the Zorba, a Z80-based machine that looks a bit like someone crossed the Osborne with the Kaypro and kept many of the best features of both; and Teleram's new true portable, which uses a liquid-crystal display and can run for several hours on its batteries.

Anyone looking for a computer ought to look seriously at the portables.

Software

The exciting news in software is a new language by Niklaus Wirth, the creator of Pascal. The language is called Modula 2 and was first implemented on the Apple; we now have it for our Sage 68000 computer. Modula 2, from Volition Systems (POB 1236, Del Mar, CA 92014) has many similarities to Pascal, and Volition Systems says that with its learning package a Pascal programmer can learn Modula 2 in a few days.

As implied by the name, Modula 2 is a modular language; each module is a collection of declarations that can be put together to make very structured and readable programs. I'm much looking forward to playing with it on our Sage.

Another interesting development came from Peachtree Software: it has developed a voice synthesizer that takes considerably less memory (or disk space) to store significant messages, and it sounds human, complete with inflections and emphases. Peachtree is using it to develop human-machine interfaces; this could become very significant.

The other big news was Digital Research's GSX graphics-support package, Visi On from Visicorp, and Lotus's 1-2-3. These three companies all had dealers clustered at their booths. Unfortunately, I ran out of time and had no chance to see them.

In addition to the new software, there were a lot of hefty improvements. A score of companies have database management programs; everyone wants to cut into the dBASE II sales. Altos President David Jackson told me he saw at least six database management programs that Altos wants to evaluate, and I noticed that Bill Godbout's people were collecting information too.

Did You Hear the One About the Computer That Talks?

It's no joke.

With the ECHO speech synthesizer from Street Electronics whatever you type on the keyboard, your computer can say. The ECHO's text-to-speech system gives your computer an unlimited vocabulary while using a minimum of memory. And now a diskette of fixed, natural sounding words is available to enhance the ECHO II's voice output.

Nearly 400 language rules are contained in the ECHO's text-to-speech algorithm. These rules enable the computer to pronounce most correctly spelled words. When in the text-to-speech mode the user can select any of 63 different pitch levels, and have words spoken either monotonically or with intonation by using simple control character sequences. The rate of speech can be fast or slow; words can be spoken in their entirety or spelled letter by letter. The ECHOs also pronounce punctuation and numbers. Words can be encoded using phonemes and diphthongs when the text-to-speech or fixed vocabulary is not required.

Applications are unlimited, ranging from phone answering, educational and training programs, to games and aiding the sight and speech impaired. The ECHO is a complete stand alone unit which is compatible with most any computer; it sells for $299.95. The ECHO II, which plugs into the Apple II, is priced at $149.95.

Street Electronics Corporation
1140 Mark Avenue, Carpinteria, CA 93013
Telephone (805) 684-4593

Call toll free for demonstration (800) 221-0339

Circle 404 on inquiry card.

www.americanradiohistory.com

With ASCOM™...

personal computer communication has never been this easy.

That's why Big 8 accounting firms and Fortune 500 companies use ASCOM.

ASCOM is an interactive microcomputer telecommunications program for timesharing and data transfers. It is easy to use because it employs menus, simple commands and features an on-line help facility.

A typical use of ASCOM is to access a data base to retrieve data for storage and analysis on your microcomputer. It can also be used to transmit program files to another machine running ASCOM. This can be done locally through direct connection, or over telephone lines by using a modem.

ASCOM works on IBM PC, MS-DOS, CP/M-86, and CP/M-80 compatible micros.

WESTICO
25 Van Zant Street • Norwalk, CT 06855
(203) 853-6880 • Telex 643-788

Dial up our 24-Hour Computer Hotline for 300 baud modems: (203) 853-0816

- ☐ Please send me an ASCOM program & documentation: $175.00 *
- ☐ The ASCOM documentation only: $30.00 *
- ☐ FREE: Catalog of over 250 available programs.

C.O.D._____ Visa_____ MasterCard_____

Card No._____ Exp._____

Model of Micro_____ 5¼"___ 8"___

Name_____

Company_____ Tel:_____

Address_____

City_____ St._____ Zip_____

(*Plus $3.00 shipping and handling in N. America. Ct. residents add 7½% sales tax.)

ASCOM is a trademark of Dynamic Microprocessor Associates. CP/M is a trademark of Digital Research
© Copyright 1983 Westico, Inc.

A WA+2

ASCOM features:

- Works with modems or by direct connection at speeds from 110 to 19,200 baud.
- Transfers both text and program files between computers.
- Protocols to synchronize large file transfers.
- Remote mode permits control of another micro running ASCOM.
- Automatic processing with command files.
- Commands for displaying directories and files.

To order ASCOM, call or write today:

WESTICO
The Software Express Service
25 Van Zant Street • Norwalk, CT 06855
(203) 853-6880 • Telex 643-788

www.americanradiohistory.com

UNIX, with change.

Idris is a trademark of Whitesmiths, Ltd. / UNIX is a trademark of Bell Laboratories.

Put off by the UNIX price tag and licensing restrictions? If you are, take a closer look at Idris.

Idris gives you all the power of UNIX at a fraction of the cost—and they're highly compatible—even pin-for-pin in some cases. Upfront expenses are much lower, you only pay for the parts you ship, and the end-user licenses can be transferable.

What's more, we wrote Idris ourselves—from the ground up—so you'll have fewer licensing hassles. We wrote it almost entirely in C, for maximum portability across a wide range of processors. And we kept it small.

Idris can run comfortably where UNIX can't even fit: On an MC68000 with no memory management hardware, for example. On a bank-switched 8080 or Z80. Or on any LSI-11 or PDP-11 with memory management. A very big Idris plus.

Find out how you can put Idris to work in your favorite configuration today. Write Whitesmiths, Ltd., 97 Lowell Road, Concord, MA 01742. Or call (617) 369-8499, TLX 951708 SOFTWARE CNCM.

With Idris, you pocket the change.

Whitesmiths, Ltd.
Crafting Software Tools for your Trade.

Distributors: **Australia,** Fawnray Pty. Ltd. P.O.B. 224 Hurstville NSW 2220 (612) 570-6100
Japan, Advanced Data Controls, Corp., Chiyoda-ku, Tokyo (03) 263-0383
United Kingdom, Real Time Systems, Newcastle upon Tyne 0632 733131

Spreadsheet programs were also popular. Sorcim announced a number of improvements in Supercalc, as well as a new programming editor. There must have been 20 other spreadsheets and derivatives. Every one of them claims one or another unique feature, and without thorough tests and reviews there's no way I can tell them apart.

There's now software for almost any "standard" machine and operating system. CP/M and the 8-bit Z80 and 8085 are still the most commonly written for, but their popularity is being strongly challenged by the IBM Personal Computer and its workalikes. Because CP/M-86 is just coming out in a final and usable form—I saw it running only at Godbout's Compupro booth, although doubtless other exhibitors had it going—it's a bit early to tell how it will fare in competition with MS-DOS.

Package Deals

A lot of "business computers" are available. Some come from original manufacturers, but many are systems put together from other people's machines. Typically, there's a package deal of software and hardware, along with introductory materials and manuals.

Some of these packages are pretty good; but it is my impression that the best hardware has not yet got together with the best software, and neither has been put into a package with the best introductory and teaching materials combined with an extensive dealer and service network. This doesn't mean that there aren't some pretty good packages available.

The Altos line, for example, is quite good. It has reasonable to excellent software, decent introductory manuals, reliable and handsome hardware, and support from a very good dealer network. The Altos can be configured to work with Ethernet and other communications networks. On the other hand, the Altos is a single-board computer. It's not easily expanded or upgraded. What you buy is what you'll have for a while, unless you trade it in on an entire new system. For many buyers that's good enough.

Circle 456 on inquiry card.

www.americanradiohistory.com

Now Our Family Tree Is Complete

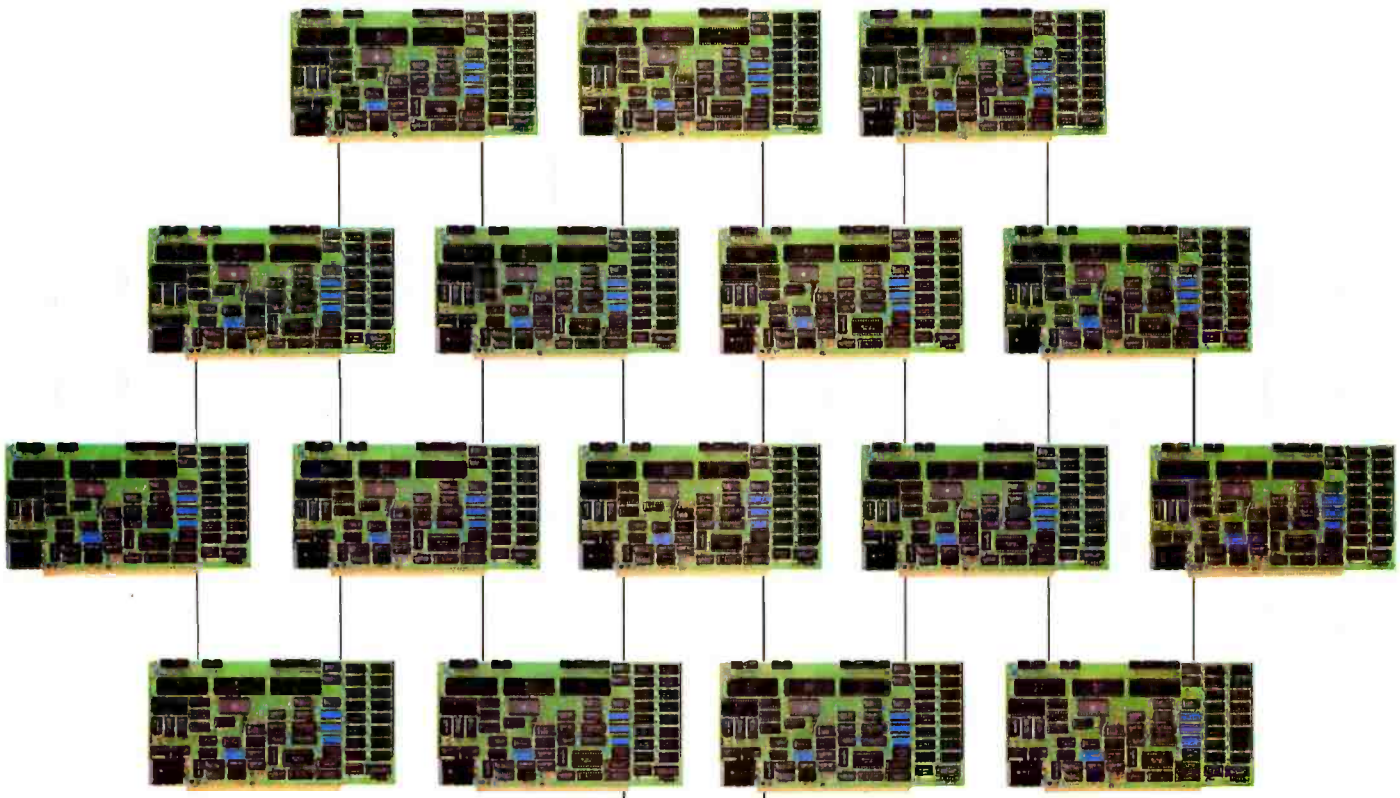

SBC-1 (Above) A multiprocessing slave board computer with Z-80 CPU (4 or 6 MHz), 2 serial ports, 2 parallel ports, and up to 128K RAM. Provides unique 2K FIFO buffering for system block data transfers. When used with TurboDOS or MDZ/OS the results are phenomenal!

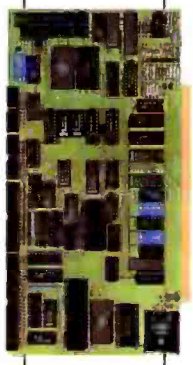

HD/CTC (Left) A hard disk and cartridge tape controller combined together on one board! A Z-80 CPU (4 or 6 MHz); 16K ROM, and up to 8K RAM provide intelligence required to relieve disk I/O burden from host system CPU. Round out your multiprocessing system with an integrated mass storage/backup controller.

Systemaster® (Right) The ultimate one board computer; use it as a complete single-user system or as the "master" in a multi-processing network environment. Complete with Z-80A CPU, 2 serial and 2 parallel ports, floppy controller, DMA, real time clock, and Teletek's advanced CP/M BIOS. Also supports MP/M-II, MDZ/OS, and TurboDOS.

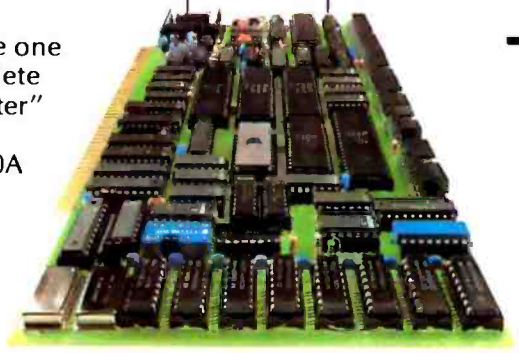

TELETEK

9767F Business Park Drive
Sacramento, CA 95827
(916) 361-1777
Telex #4991834
Answer back-Teletek

Circle 422 on inquiry card.

Your Single Source Family of S-100 Products.

© Teletek 1983

www.americanradiohistory.com

The Altos is the top end of the microcomputer line, and total package costs tend to be high (although low compared to the minicomputers the Altos can replace). At the low end, the Osborne 1 is an excellent total package. I'm impressed with both the software and the introductory materials that come with the machine; I'm even more impressed with the dealer and service network that Osborne has built.

I didn't see any other total packages as impressive as those; but that was at COMDEX. I also saw hardware firms out looking at packaging. Compupro, Otrona, Zenith, Non-Linear Systems (Kaypro), Altos, and Morrow Designs were all buying rights to software, hiring writers, and building up their dealer networks. (I'm sure many others were also; these are the ones I talked to myself.)

The Bottom Line

Tony Pietsch, who knows what to look for, thought the most significant thing about this year's COMDEX was that of a dozen new terminals and small computers, just about every one of them offers ANSI-Standard X-3.64-1979. That, he explains, is standard ASCII, which specifies how computers ought to communicate with each other and what the control characters ought to mean. This is what the big boys in mini- and mainframe computers conform to.

This trend is significant because it means that the microcomputer industry is moving that much closer to maturity. We now have microcomputers that can hook into the communications networks used by the very large business systems, and that trend is strengthened by the adoption of ANSI (American National Standards Institute) standards for communications. Microcomputers cost only a fraction of what the business community usually expects to pay. We've established a trend toward decent software at reasonable prices. New and better manuals, instructional materials, and training systems are being developed all the time.

Put it all together and there's no limit to the future of the microcomputer industry. ■

What if you want more assurance your valuable data won't fade away?

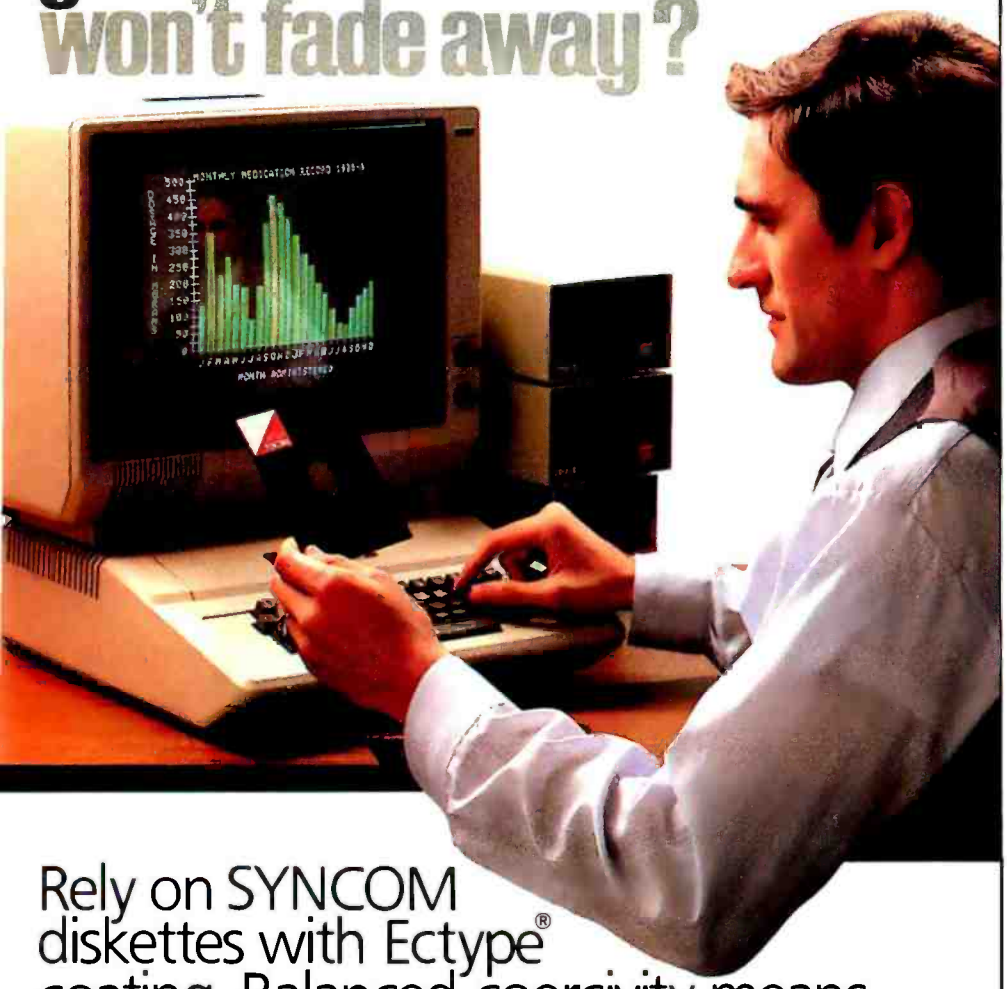

Rely on SYNCOM diskettes with Ectype® coating. Balanced coercivity means long-lasting signal life.

Syncom diskettes assure excellent archival performance in the following ways.

First, with calibrated coercivity – a precisely balanced blend of milled ferrous oxides that allows Ectype® coating to respond fully to "write" signals, for strong, permanent data retention.

Then, a burnished coating surface to boost both signal strength and packing density.

Carbon additives drain away static charge before it can alter data.

And, finally, every Syncom diskette is write/read-back certified to be 100% error free.

To see which Syncom diskette will replace the one you're using now, *send for our free "Flexi-Finder" selection guide* – and the name of the supplier nearest you.



Balanced coercivity of Ectype® coating allows write current to saturate fully.

Syncom, Box 130, Mitchell, SD 57301.
800-843-9862; 605-996-8200.

SYNCOM

Manufacturer of a full line of flexible media

A Division of Schwan's Sales Enterprises, Inc

Circle 408 on Inquiry card.

www.americanradiohistory.com

Invest $129.95 in Zilog's Peripherals Kit and get what you paid for out of the 68000.

So, you picked the 68000 for your new design only to discover the manufacturer doesn't offer all the peripherals you need to back it up. What now? Order Zilog's handy new Z8500 Peripherals Evaluation Kit today to help bring your designs to reality. Only Zilog has the peripherals and foresight to develop this unique kit. And only Zilog can make you this special offer.

You get the most advanced peripheral chips available to enhance the performance of your 68000 CPU in addition to interface applications notes and complete documentation—all for $129.95!

Zilog peripherals feature 68000-compatible interrupts and software programmable operating modes to increase system performance and flexibility. All you supply is the 68000. You get faster answers, too. Follow the kit's easy instructions, and you can have results in a matter of hours, not weeks.

The Z8500 Peripherals Evaluation Kit. The peripherals you need for the 68000 that you can't get from the manufacturer. Kits are in stock at all Zilog distributors. For the phone number of the distributor nearest you, or for additional free information on the Z8500 peripherals call Zilog TOLL FREE (800) 272-6560.

Z8530 SCC
- One Megabit/second data transfer rate
- Two full-duplex channels
- Asynchronous and synchronous data communications modes

Z8030 FIO
- 128-byte asynch bidirectional FIFO buffer
- Mailbox registers
- Pattern recognition logic

Z8536 CIO
- Three I/O ports
- Four handshake modes
- Three independent 16-bit counter/timers

Zilog

Pioneering the Microworld.

An affiliate of EXXON Corporation

www.americanradiohistory.com

Our huge inventory will save you time. And money.

Chances are, we have just what you want right in our warehouse. So we can ship it out right now. At the right price.

16K RAM KITS.....13.95
Set of 8 NEC 4116 200 ns. Guaranteed one year.
FOR IBM-PC, set of 9.....15.75

DISKETTES
ALPHA DISKS.....21.95
Single sided, certified Double Density 40 Tracks, with Hub-ring. Box of 10. Guaranteed one year.

SCOTCH 3M
S.S.D.DEN 40 TRK.....23.50
D.S.D.DEN 40 TRK.....36.50

VERBATIM DATALIFE
MD 525-01, 10, 16.....26.50
MD 550-01, 10, 16.....44.50
MD 557-01, 10, 16.....45.60
MD 577-01, 10, 16.....34.80
FD 32 or 34-9000.....36.00
FD 32 or 34-8000.....45.60
FD 34-4001.....48.60

DISKETTE STORAGE
5¼" PLASTIC LIBRARY CASE.....2.50
8" PLASTIC LIBRARY CASE.....3.50
PLASTIC STORAGE BINDER w/ Inserts....9.95
PROTECTOR 5¼" (50 Disk Capacity)....21.95
PROTECTOR 8" (50 Disk Capacity).....24.95
DISK BANK 5¼".....5.95
DISK BANK 8".....6.95

NEC PERSONAL COMPUTERS
Call Alpha Byte for our low NEC prices.

ALTOS COMPUTER SYSTEMS
Call Alpha Byte for our low Altos prices.

ATARI COMPUTERS
SIGNALMAN MODEM.....85.00
ATARI 800.....659.00
ATARI 400 (16K).....$CALL
ATARI 810 DISK DRIVE.....445.00
ATARI 850 INTERFACE.....169.00
ATARI 410 PROGRAM RECORDER.....75.00
EPSON CABLE.....35.00
MEMORY MODULE (16K).....89.95
JOYSTICK CONTROLLER.....10.00
PADDLE CONTROLLERS.....17.50
STAR RAIDERS.....32.00
MISSILE COMMAND.....32.00
ASTERIODS.....32.00
PACMAN.....32.00
CENTIPEDE.....32.00
PERCOM DISK DRIVE.....684.00
See Apple-Atari Software.

INTEC PERIPHERALS RAM MODULES
48K FOR ATARI 400.....145.00
32K FOR ATARI 800.....67.00

PRINTERS
ANADEX WP 6000 P & S.....2814.00
ANADEX 9501A.....1390.00
STAR MICRONICS GEMINI 10.....$CALL
RIBBONS FOR MX-80.....8.95
RIBBONS FOR MX-100.....24.00
C-ITOH F-10 40 CPS PARALLEL.....1390.00
C-ITOH F-10 40 CPS SERIAL.....1390.00
C-ITOH PROWRITER PARALLEL.....469.00
C-ITOH PROWRITER SERIAL.....590.00
C-ITOH PROWRITER II PARALLEL.....715.00
C-ITOH PROWRITER II SERIAL.....767.00
EPSON MX-80 W/GRAFTRAX PLUS.....$CALL
NEW! EPSON FX-80.....$CALL
EPSON MX-100 W/GRAFTRAX PLUS....$CALL
EPSON GRAFTRAX PLUS.....60.00
COMREX CR-1 PARALLEL.....839.00
COMREX CR-1 SERIAL.....859.00
COMREX TRACTOR FEED.....109.00
IDS PRISM 80.....859.00
IDS PRISM 80 W/ COLOR/OPTIONS....1599.00
NEC 8023A.....485.00
NEC SPINWRITER 3530 P. RO.....1995.00
NEC SPINWRITER 7710 S. RO.....2545.00
NEC SPINWRITER 7730 P. RO.....2545.00
NEC SPINWRITER 7700 D SELLUM....2795.00
NEC SPINWRITER 3500 SELLUM.....2295.00
OKIDATA MICROLINE 80.....389.00
OKIDATA MICROLINE 82A.....460.00
OKIDATA MICROLINE 83A.....700.00
OKIDATA MICROLINE 84.....1170.00
OKIGRAPH 82.....49.95
OKIGRAPH 83.....49.95
MICROBUFFER IN-LINE 32K.....299.00
MICROBUFFER IN-LINE 64K.....349.00
MICROBUFFER 64K EXPANSION MOD..179.00

BOOKS
THE CUSTOM APPLE.....24.95
BASIC BETTER & FASTER DEMO DISK...18.00
THE CUSTOM TRS-80.....24.95
MICROSOFT BASIC FASTER & BETTER..24.95
CUSTOM I/D MACHINE LANGUAGE.....24.95
TRS-80 DISK & MYSTERIES.....16.95
MICROSOFT BASIC & DECODED.....24.95

APPLE HARDWARE
QUENTIN APPLEMATE DRIVE.....269.00
SUPER CLOCK II.....129.00
VERSA WRITER DIGITIZER.....259.00
ABT APPLE KEYPAD.....119.00
SOFTCARD PREMIUM SYSTEM.....569.00
MICROSOFT Z-80 SOFTCARD.....249.00
MICROSOFT RAMCARD.....79.00
VIDEX 80x24 VIDEO CARD.....260.00
VIDEX KEYBOARD ENHANCER II.....129.00
VIDEX FUNCTION STRIP.....74.00
M & R SUPERTERM 80x24 VIDEO BD..315.00
M & R COOLING FAN.....44.95
M & R UNIVERSAL MOD.....54.95
T/G JOYSTICK.....44.95
T/G PADDLE.....29.95
T/G SELECT-A-PORT.....54.95
T/G TRACKBALL.....47.50
KRAFT JOYSTICK.....48.00
VERSA E-Z PORT.....21.95
THE MILL-PASCAL SPEED UP.....270.00
PROMETHEUS VERSACARD.....165.00
MICROBUFFER II‡ 16K W/GRAPHICS...259.00
MICROBUFFER II‡ 32K W/GRAPHICS...299.00
SUPERFAN II.....62.00
SUPERFAN II W/ZENER.....84.50
RANA CONTROLLER.....104.00
RANA DRIVE ELITE I.....335.00
SNAPSHOT.....119.00
GRAPPLER+.....145.00
7710A ASYNCHRON. SER. INTERFACE.149.00
7712A SYNCHRON. SER. INTERFACE...159.00
7742A CALENDAR CLOCK.....99.00
772BA CENTRONICS INTERFACE.....105.00
VISTA VISION 80-80 COL CARD.....259.00
VISTA 8" DISK DRIVE CONTROLLER...549.00

MONITORS
USI AMBER 12".....160.00
NEC 12" GREEN MONITOR.....169.00
NEC 12" COLOR MONITOR.....399.00
BMC GREEN MONITOR.....89.00
AMDEK COLOR I.....365.00
AMDEK RGB COLOR II.....774.00
AMDEK RGB INTERFACE.....169.00
TAXAN RGB.....359.00
TAXAN 12" AMBER.....125.00

MOUNTAIN HARDWARE
CPS MULTIFUNCTION BOARD.....154.00
ROMPLUS W/ KEYBOARD FILTER.....165.00
ROMPLUS W/O KEYBOARD FILTER.....125.00
KEYBOARD FILTER ROM.....49.00
COPYROM.....49.00
MUSIC SYSTEM.....369.00
ROMWRITER.....149.00
EXPANSION CHASSIS.....580.00
RAMPLUS 32K.....160.00

S-100 HARDWARE
CALIFORNIA COMPUTER SYSTEMS
2200A MAINFRAME.....459.00
2065C 64K DYNAMIC RAM.....539.00
2422 DISK CONT. & CP/M® 359.00
2710 4 SERIAL I/O.....279.00
2718 2 SERIAL / 2 PARALLEL I/O.....289.00
2720 4 PARLLEL I/O.....219.00
2810 Z-80 CPU.....259.00

COMREX
"THE TIMEPIECE" S-100 CLOCK.....125.00

MODEMS
NOVATION J-CAT.....125.00
NOVATION SMARTCAT 212.....499.00
NOVATION SMARTCAT.....209.00
NOVATION D-CAT (1200 Baud).....619.00
NOVATION APPLE-CAT (300 Baud).....310.00
NOVATION APPLE-CAT (1200 Baud).....605.00
UDS 212 LP (1200 Baud).....429.00
UDS 103 JLP AUTO ANS.....209.00
HAYES MICROMODEM II.....289.00
MICROMODEM W/ TERMINAL PKG.....309.00
HAYES 100 MODEM (S-100).....325.00
HAYES SMART MODEM (300 Baud).....227.00
HAYES SMART MODEM (1200 Baud)...540.00
HAYES CHRONOGRAPH.....199.00
SIGNALMAN MODEM W /RS-232C.....85.00

TERMINALS
TELEVIDEO 925C.....810.00
ADDS-VIEWPOINT.....599.00
HAZELTINE ESPRIT.....510.00
VISUAL-50 GREEN.....690.00

TRS-80 MOD I HARDWARE
PERCOM DATA SEPARATOR.....27.00
PERCOM DOUBLER II W /DOS 3.4.....159.00
4 DRIVE CONTROLLER P/S.....259.00
TANDON 40 TRK DISK DRIVE W/P.S...289.00
LNW DOUBLER W/DOSPLUS 3.3.....138.00
LNW 5/8 DOUBLER W/DOSPLUS 3.4...181.00

IBM HARDWARE
SEATTLE 64K RAM+.....355.00
QUADBOARD 64K.....430.00
64K MEMORY UPGRADE.....80.00

ALPHA BYTE IBM MEMORY EXPANSION BOARDS
256K W /RS-232C.....349.00
256K W /RS-232C & SUPERCALC.....529.00
512K W /RS-232C.....579.00
512K W /RS-232C & SUPERCALC.....749.00

IBM DISK DRIVES
Alpha Byte's add-on drive kits for the IBM-PC — each kit includes installation instructions.
1 Tandon TM100-1 Single head 40 trk.195.00
1 Tandon TM100-2 Double head 40 trk.262.50
QUENTIN DOUBLE HEAD 40 TRK.....289.00

HARD DISK DRIVE SPECIAL
MEDIA DISTRIBUTORS
5¼" Winchester, cabinet, P.S. controller, assembled and tested. Attaches to your Z-80 CPU system in minutes. Runs on Northstar, Heath/Zenith, TRS-80 Mod II, Apple w/ CP/M® . CCS and others. Hardware must be Z-80 /CPM® system. The included self-installing software attaches to your CP/M® system. 6-month warranty. No effect on your present floppy disk system. Includes all cables and installation instructions.
10 MEGABYTES.....2370.00
20 MEGABYTES.....3180.00

ISOLATORS
ISO-1 3-SOCKET.....49.95
ISO-2 6-SOCKET.....49.95

BARE DRIVES
TANDON 5¼ INCH
100-1 SINGLE HEAD 40 TRK.....195.00
100-2 DUAL HEAD 40 TRK.....262.50
100-3 SINGLE HEAD 80 TRK.....250.00
100-4 DUAL HEAD 80 TRK.....369.00

TANDON THINLINE 8 INCH
848-1 SINGLE SIDE.....379.00
848-2 DUAL SIDE.....490.00

MICROSOFT
APPLE
FORTRAN*.....150.00
BASIC COMPILER*.....296.00
COBOL*.....550.00

CP/M is a reg. trademark of Digital Research. *Requires Z-80 Softcard. †Reg. trademark of Micro Pro Internation l Corp. ‡Trademark of Practical Peripherals, Inc. **Trademark of Software Dimensions, Inc.

www.americanradiohistory.com

Z-80 SOFTCARD....249.00
RAMCARD....79.00
TYPING TUTOR II....17.95
OLYMPIC DECATHLON....24.95
TASC APPLESOFT COMPILER....125.00
ALDS....95.00
MULTIPLAN NATIVE OR CP/M....209.00
TIME MANAGER....117.00

MICRO PRO

APPLE CP/M®

WORDSTAR*†....279.00
SUPERSORT*†....179.00
MAILMERGE*†....174.00
DATASTAR*†....207.00
SPELLSTAR*†....174.00
CALCSTAR*†....109.00

CP/M® SOFTWARE

We carry CP/M® software in all popular disk formats. Call for availability and price. Most software also available on IBM.

THE WORD PLUS....117.00
d BASE II....429.00
QUICKCODE....230.00
DUTIL....91.00
SUPERCALC....189.00
SPELLGUARD....230.00
P & T CP/M® MOD 2 & 16 TRS-80....175.00
PASCAL Z....349.00
PASCAL/M Z-80 OR 8080....295.00
CONDOR I....579.00
CONDOR II....849.00

DIGITAL RESEARCH

MAC....82.00
ZSID....92.00
PASCAL MT+ W/ SSP....429.00
PL/ 1-80....439.00
C BASIC 2....109.00

SUPERSOFT

DIAGNOSTIC I....69.00
DIAGNOSTIC II....89.00
'C' COMPILER....179.00
UTILITIES I....59.00
UTILITIES II....59.00
RATFOR....89.00
FORTRAN....239.00
DISK DOCTOR....78.00

MICROPRO

WORDSTAR....279.00
SUPERSORT....179.00
MAILMERGE....174.00
DATASTAR....207.00
SPELLSTAR....174.00
CALCSTAR....109.00

MICROSOFT

MULTIPLAN....209.00
BASIC 80....249.00
BASIC COMPILER....299.00
FORTRAN 80....359.00
COBOL 80....585.00
MACRO 80....156.00
mu MATH/mu SIMP....200.00
mu LISP/mu STAR....165.00

IBM SOFTWARE

VOLKSWRITER V 1.2....145.00
WRITE ON....90.00
EASYWRITER II....247.00
EASY SPELLER....149.00
EASY FILE....285.00
HOME ACCOUNTANT +....105.00
FIRST CLASS MAIL....85.00
SUPERCALC....179.00
WORDSTAR....279.00
MAILMERGE....174.00
DATASTAR....207.00
SPELLSTAR....174.00
SUPERSORT....179.00
d BASE II....429.00
SPELLGUARD....145.00
CALCSTAR....199.00
THE WORD PLUS....117.00
T.I.M....379.00
JFORMAT....39.00
MOVE IT....109.00
THE TAX MANAGER....188.00
VISICALC / 256K....189.00
VISITREND / VISIPLOT....235.00
VISIDEX....192.00
VISIFILE....249.00
VISISCHEDULE....229.00
VERSA WRITER GRAPHICS TABLETS....270.00
CONCURRENT CP/M® 86....315.00
GRAPHICS HARD COPY SYSTEM....19.50
Call for additional IBM software prices.

TRS-80 SOFTWARE

NEWDOS/80 2.0 MOD I,III....139.00
LAZY WRITER MOD I,II....165.00
PROSOFT NEWSCRIPT MOD I,III w/labels109.00
SPECIAL DELIVERY MOD I,III....119.00

WORD PROCESSOR SPECIAL

(Limited Quantities)

FRANKLIN ACE 1000....1395.00
FRANKLIN ACE SYSTEM DISK DRIVE W/ CONT....539.00
ACE WRITER WORD PROCESSOR....129.00
MICROBUFFER II 32K....299.00
C.ITOH 8510....795.00
NEC HI RES GREEN....285.00
SCOTCH 3M DISKETTES..44.00
STORAGE BOX....2.50

~~$3489~~

Now $2392

This system may be modified to your needs. Call for special price quote.

IBM GAME SOFTWARE

ZORK I, II, III....28.00
STARCROSS....28.00
DEADLINE....35.00
GALAXY....19.50
MIDWAY CAMPAIGN....17.00
THE WARP FACTOR....31.16
LOST COLONY....23.36
CONQUEST....23.36
GALACTIC ATTACK....25.00
APPLE PANIC....23.61
TEMPLE OF ASPHAI....34.95
CROSSFIRE....24.95
FROGGER....27.26
M*SOFT FLIGHT SIMULATOR....38.95

If you don't see the software you want, call. Our software stock is constantly expanding.

APPLE SOFTWARE

MAGIC WINDOW II....117.00
MAGIC WINDOW....79.00
MAGIC WORDS....59.00
MAGIC MAILER....59.00
DB MASTER....169.00
DB MASTER UTILITY PACK I OR II....69.00
DATA CAPTURE 4.0/80....59.95
PFS: GRAPH....89.95
PFS: (NEW) PERSONAL FILING SYSTEM.85.00
PFS: REPORT....79.00
Z-TERM*....89.95
Z-TERM PRO*....129.95
ASCII EXPRESS PRO....98.00
EASY WRITER-PRO....136.00
EASY MAILER-PRO....117.00
A-STAT COMP. STATISTICS PKG....99.00
BEAGLE BROTHERS UTILITY CITY....23.00
APPLE MECHANIC....23.00
TIP DESK #1....15.95
BEAGLE BAG....23.00
SUPER TEXT 40/56/77....97.50
LISA 2.5....59.95
TRANSCEND II....115.00
SCREENWRITER II....99.00
DICTIONARY....79.00
GENERAL MANAGER....179.00

CONTINENTAL SOFTWARE

G/L....165.00
A/R....165.00
A/P....165.00
PAYROLL....165.00
PROPERTY MGMT....325.00
THE HOME ACCOUNTANT....59.95
F.C.M. w/form letter....75.00

VISICORP

DESKTOP PLAN II....189.00
VISIPLOT....158.00
VISITREND/VISIPLOT....229.00
VISIDEX....189.00
VISITERM....79.00
VISICALC....189.00
VISIFILES....189.00
VISISCHEDULE....229.00
X-TRA SPECIAL DELIVERY MOD I,III....199.00
TRACKCESS MOD I....24.95
OMNITERM SMART TERM. MOD I,III....89.95
MICROSOFT BASIC COMP. FOR MOD I..165.00
LOOS 5.1 MOD I,III....119.00

TRS-80 GAMES

SUPERNOVA....17.95
ROBOT ATTACK....17.95
MISSILE ATTACK....18.95
STAR FIGHTER....24.95

Call for more TRS-80 games.

APPLE & ATARI GAMES

Spinnaker in stock, call for prices.

BRODERBUND

APPLE PANIC....23.61
MIDNIGHT MAGIC....27.26
CHOPLIFTER....27.20

AUTOMATED SIMULATIONS

INVASION ORION....20.95
STAR WARRIOR....31.35
CRUSH,CRUMBLE AND CHOMP....24.95
TEMPLE OF APSHAI....31.35
HELLFIRE WARRIOR....31.35
RESCUE AT RIGEL....23.36

ON-LINE SYSTEMS

WIZARD AND PRINCESS....27.26
SOFT PORN ADVENTURE....23.36
THRESHOLD....31.16
JAW BREAKER....23.36
CROSSFIRE....24.95
ULYSSES & GOLDEN FLEECE....25.95
FROGGER....24.50

INFOCOM

ZORK I,II,III....28.00
STARCROSS....28.00
DEADLINE....35.00

EDU-WARE

COMPU-READ....24.95
COMPU-MATH FRACTIONS....34.95
COMPU-MATH DECIMALS....34.95

MORE GREAT APPLE GAMES

DARK CRYSTAL....31.61
TUBEWAY....27.26
ARCADE MACHINE....32.95
TUES. MORNING QUARTERBACK....25.95
THE SPACE VIKINGS....38.50
COMPUTER QUARTERBACK....31.16
SEA FOX....24.00
THE SHATTERED ALLIANCE....49.95
POOL 1.5....27.26
ULTIMA....31.16
RASTER BLASTER....23.36
FLIGHT SIMULATOR....26.61
INTERNATIONAL GRAND PRIX....25.95
SARGON II....28.95
PINBALL SUBLOGIC....24.50
SNACK ATTACK....23.36
BUDGECO PINBALL CONST. SET....31.61
THIEF....24.95
THE WARP FACTOR....31.16
COSMO MISSION....23.36
WIZARDRY....37.95
NIGHT OF DIAMONDS....27.26
STARBLAZER....24.95
CRISIS MOUNTAIN....26.32

SIRIUS SOFTWARE

SPACE EGGS....23.36
GORGON....31.16
SNEAKERS....23.36
PHANTOMS FIVE....22.00
BANDITS....25.00

EDU-WARE

PERCEPTION PKG....19.95
COMPU-MATH: ARITHMETIC....39.95
COMPU-SPELL (REQ. DATA DISK)....24.95
COMPU-SPELL DATA DISKS 4-8, ea....17.95
RENDEZVOUS....28.50

ON-LINE SYSTEMS

ULTIMA II....42.00
MISSILE DEFENSE....27.26
PEST PATROL....23.36
TIME ZONE....77.96
CRANSTON MANOR....25.95
CANNON BALL BLITZ....25.95

MUSE SOFTWARE

ROBOT WARS....32.95
THREE MILE ISLAND....31.61
A.B.M....19.46

To order or for information call

In New York:
(212) 509-1923

In Los Angeles:
(213) 706-0333

In Dallas:
(214) 744-4251

By Modem:
(213) 991-1604

CALL OUR MODEM LINE FOR WEEKLY SPECIALS.

Alpha Byte COMPUTER PRODUCTS

31245 LA BAYA DRIVE
WESTLAKE VILLAGE, CA 91362

Circle 14 on inquiry card.

We guarantee everything we sell for 30 days — no returns after 30 days. Defective software will be replaced free, but all other software returns are subject to 15% restocking fee and must be accompanied by RMA slip. No returns on game software, unless defective. We accept VISA and MasterCard on all orders: COD orders, up to $300. Shipping charges: $3 for all prepaid orders, actual shipping charges for non-prepaids; $3 for COD orders under 25lbs. ($6 for over) plus a $4 surcharge; add 15% for foreign, FPO and APO orders. Calif. add 6% sales tax, in L.A. County add 6½%. Prices quoted are for stock on hand and are subject to change without notice.

www.americanradiohistory.com

The Promise of Perpendicular Magnetic Recording

As the Japanese seem to have realized already, perpendicular magnetic recording represents the next level of recording technology.

Clark E. Johnson Jr.
Vertimag Systems Corp.
815 14th Ave. SE
Minneapolis, MN 55414

Of the several new mass-storage technologies that promise greatly increased data densities, perpendicular magnetic recording is the one most likely to enjoy early widespread use. Perpendicular-magnetic-recording technology, even in its infancy, promises a tenfold improvement over conventional recording.

The key to the new method lies in magnetizing the tape or disk surface material at right angles, i.e., at angles perpendicular to the surface. In contrast, conventional longitudinal recording creates magnetized zones along the surface. With perpendicular recording, higher recording densities now squeeze the width rather than the length of these magnetized regions.

Conventional Recording

The digital 1s and 0s of a computer's binary language are recorded by magnetizing discrete regions of the magnetic material, usually an oxide of iron, that coats the surface of a recording tape or disk. You can think of each computer bit (1 or 0) as a tiny permanent magnet within this magnetizable surface layer.

In conventional recording technology, the tiny permanent magnets representing digital 1s might be recorded north-pole-first along the length of the recording track, while digital 0s would be recorded south-pole-first along the same track. Because the playback heads can detect only transitions, the process of reading the recorded data actually involves detecting the change in polarity: a north-to-south transition may be arbitrarily defined as a digital 1, and a south-to-north change will then become a digital 0. The magnetized zones lie lengthwise, or end to end, along the recording track in conventional longitudinal recording.

A nine-track digital tape recorder will encode 1s and 0s in nine parallel rows or tracks along the length of the tape, with each track containing up to 6250 magnetic changes (called flux changes) per inch. The most advanced magnetic memories can record the equivalent of 15,000 "tiny permanent magnets" per inch of recording track. Winchester disk memories, using the most advanced head-positioning mechanisms, create up to 1000 circular recording tracks per inch of disk radius. Such advanced Winchester memories have storage capacities as high as 1.6×10^9 bits per disk.

The Limiting Factor

What limits recording density and therefore memory capacity? That is, what sets a ceiling on the number of tiny permanent magnets that can be created in each inch of the recording medium's magnetic coating? What are the sources of data-reading error that prohibit an indefinite increase in magnets-per-inch recording density? Computer memories must sustain error-free operation in the region of 1 bit in 10^{12} bits. Otherwise, computer systems would provide unexpected payroll bonuses and guide astronauts to Hoboken instead of the moon.

The stronger the recording equipment can make each tiny magnet that it creates in the medium's magnetic layer, the more accurately the equipment's read head will determine whether a magnet represents a 1 or a 0. Memory-system designers try to create circumstances that will sustain magnet strength as recording density (bits per inch) increases.

From basic research on magnetism, it has long been understood that a permanent magnet should be long and thin; its length should be several times greater than its thickness. If for some reason a magnet must be shortened, then the magnet's thickness must be proportionately reduced in

About the Author

Clark E. Johnson Jr. is the president of Vertimag Systems Corporation, a company that was formed specifically to commercialize perpendicular magnetic recording. He began his involvement with magnetic-recording research and development with the 3M Company in the 1950s.

Circle 319 on inquiry card.

www.americanradiohistory.com

ShareNet™ is Now

Others Talk of Tomorrow

The Only Complete Personal Computer Local Area Network

Others are just talking about tomorrow's technology . . . **ShareNet** has it now!
With power and capabilities found only in minicomputers and mainframes;
Best of all it can be yours today.
ShareNet Local Area Network gives you a true multi-user system enabling you to link up to 24 personal computers, five printers and use . . .

Multiple Operating Systems	Print Spooling
Extensive Data Security	Redundant Directories
Hierarchical Directory	Cartridge Disk Back-up
Default File Locking	Public & Private Directory
Concurrent File Sharing	Electronic Mail

Network Interface Cards available for IBM/PC.
Soon available: APPLE, VICTOR, DEC RAINBOW, OSBORNE, & Others.
For tomorrow's technology, today . . . call 1-800-453-1267.

ShareNet™

The Local Area Network of the Future Today

TELEX: 669 401 AIR COURS PHX

Novell Data Systems, Inc. 1170 N. Industrial Park Drive Orem, Utah 84057 Phone: 801-226-8202

www.americanradiohistory.com

order to maintain the magnet's strength. This need to make the magnet long relative to its "waistline" dimension stems from the self-demagnetization properties of all permanent magnets. The north and south poles tend to neutralize each other, with a net reduction in the magnet's overall effectiveness and resulting external field. Keeping the poles far apart and the ratio of length to thickness high reduces this self-demagnetization effect. The length-to-thickness ratio suffers as longitudinal recording's data density increases.

An examination of the factors determining the dimensions of these longitudinally recorded magnets will show why increased density adversely affects the magnet's length-to-thickness ratio. Because they are recorded end to end along the magnetic track, their length must decrease as recording density rises. One dimension of the "waistline" is fixed, being set by the thickness of the tape or disk's magnetic coating. The other is determined by the across-the-track width of the recording head.

Therefore, to maximize the magnet's length-to-width ratio, recording-head designers strive to produce very narrow tracks, while manufacturers of tape and disk media offer products with remarkably thin magnetic layers. Both endeavors are aimed at creating magnetized regions with very narrow waistlines so that the reduced magnet length at high densities still preserves a reasonable length-to-thickness ratio.

At densities above 15,000 magnets per inch, however, even these tactics reach a point of diminishing returns. Thinner coatings mean less magnetic material, hence weaker electrical output signals. Recording experts suggest that conventional longitudinal-recording technology has already pushed lineal recording density close to its ultimate ceiling. The only dimension left open to improvement in raising memory capacity within this technology is the number of tracks per inch. Currently, the most advanced head-positioning servomechanism can advance the head in increments of only 1/1000 of an inch, producing 1000 tracks per inch of disk diameter. It should ultimately be possible, however, to record 10,000 magnetic zones per inch and, therefore, something approaching 10,000 tracks per inch. That would yield a tenfold gain in memory capacity without need for further gains in along-the-track recording density. Improved head-positioning mechanisms will doubtlessly raise the tracks-per-inch figure in the years ahead but perpendicular recording affords the possibility of major gains not only in tracks per inch but especially in bits per inch along each track.

Perpendicular Recording

Since conventional longitudinal-recording technology leads to increased self-demagnetization of the tiny recorded magnets as density is increased, is there some alternative approach that sidesteps the problem? The obvious way is to reorient the tiny magnets within the magnetizable layer on each disk or tape, so that their length-to-thickness ratio no longer deteriorates at higher densities. While conventional recording reduces the length dimension of the end-to-end magnets, perpendicular recording puts the squeeze on width rather than length at higher densities. The magnetized zones are turned 90 degrees, so that instead of lying along the tape's surface, the length dimension of the zone now stands vertically, perpendicular to the surface of the disk or tape. You might say that the magnets are recorded "into" the magnetic material rather than along it. Magnet length is now determined by the depth of the layer of magnetic material. One of the width dimensions is still set by recording-track width and the other by bits per inch along the track.

Consequently, raising the recording density no longer worsens the demagnetizing effect. In fact, the opposite is true. Because the recorded magnetic zones are perpendicular to the disk or tape surface, higher densities now squeeze their waistline dimensions, rather than their length. The length-to-thickness ratio steadily

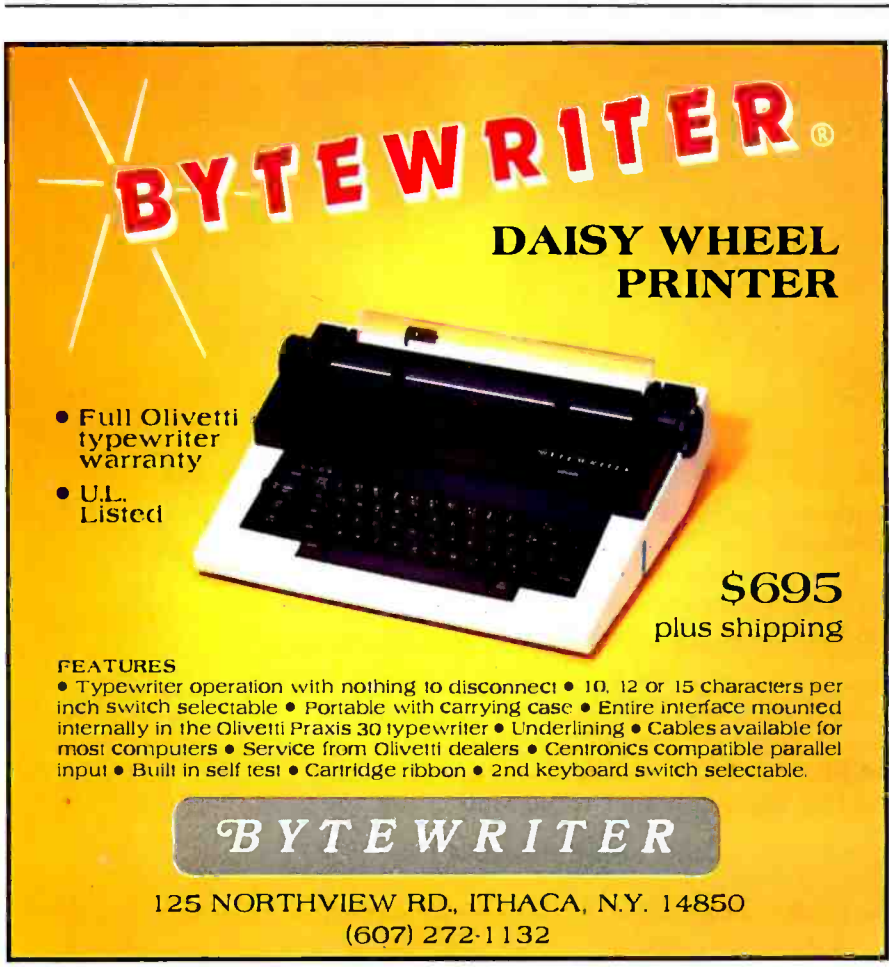

Circle 66 on inquiry card.

Circle 20 on inquiry card. →

www.americanradiohistory.com

IBM compatible . . .

Go first class . . . with your peripherals, too!

Your IBM personal computer deserves the finest, fully compatible peripherals, like Amdek's high resolution Color II Monitor . . . the new comfort-view Model "Video-310A" amber monitor . . . or the new revolutionary AMDISK-3 Micro-Floppydisk Drive with up to 1 Megabyte storage! Just call, or write for full details on these high-performance Amdek peripherals.

- Color II Monitor, 13", 560(H) x 240(V) line resolution, 80 x 24 character display.
- Model "Video-310A" amber phosphor screen with TTL video input. Connecting cable included.
- "AMDISK-3" Micro-Floppydisk Drive, 1 Megabyte (unformatted) storage, track-to-track compatible with 5¼" drives, shirtpocket size Micro-Floppydisk Cartridge.

2201 Lively Blvd. • Elk Grove Village, IL 60007
(312) 364-1180 TLX: 25-4786

AMDEK CORP.

Amdek . . . your guide to innovative computing!

www.americanradiohistory.com

Technology	Versatility	Lineal Density	Areal Density
longitudinal recording	read and write	15,000 flux reversals per inch	165×10^6 flux reversals per square inch
perpendicular recording	read and write	100,000 flux reversals per inch	10^{10} flux reversals per square inch
laser (optical) recording	read only	25,000 impressions per inch	6.25×10^8 impressions per square inch
64K-bit RAM	read and write	NA	10^6 bits per square inch

Table 1: *A comparison of the theoretical performance of four memory technologies. Perpendicular magnetics offers both read and write capabilities and the highest areal densities. The 64K-bit RAM is, of course, volatile and is included here only to put the density of the other technologies in perspective.*

improves as recording density is raised, and we have a condition, rare in science, in which pushing technology to higher limits actually enhances the phenomenon being pushed.

Even though perpendicular-recording technology has yet to emerge from the research laboratory, scientists confidently predict that densities of 100,000 bits per inch will rapidly be realized in commercial hardware. Indeed, some experiments already suggest that a 440,000-bit-per-inch density will be possible. Further improvements will be made in the years ahead, with an ultimate limit set by phenomena—perhaps at the atomic level—totally different from the self-demagnetization that limits the density attainable with longitudinal-recording technology.

Areal Comparison with Other Technologies

Recording media and technologies are best compared on the basis of bits per square inch rather than bits per inch. This is because you can increase memory capacity by raising both recording density and the number of recording tracks. Thus, areal comparisons take both sources of improvement into account. On this basis, perpendicular recording offers close to an immediate hundredfold improvement, at 10^{10} (100,000 × 100,000) bits per square inch, over longitudinal recording's 10^8 (10,000 × 10,000) bits per square inch. True, these figures represent recording densities that may be attainable in the future rather than what can be achieved with today's hardware, but they provide a useful basis for comparison.

Laser Recording

Laser memory techniques enjoy a "good press," probably owing to their space-age novelty. There are physical limitations, however, to the potential data densities achieved by laser technology. Diffraction phenomena limit physical dimensions to about 1 micron when visible light is used. (The same limitation crops up in geometries of semiconductor layout.) Because 1 micron is 1 millionth of a meter, and a meter is roughly 40 inches, this limiting resolution works out to $40/10^6$. At best, therefore, based on visible-light wavelengths, laser recording can achieve a maximum density of $10^6/40$ or 25,000 bits per inch. That compares to 100,000 magnets per inch for perpendicular recording, which also has no comparable fundamental barrier to much higher densities. In terms of areal density, laser technology might attain a maximum of 25,000 × 25,000 or 6.25×10^9 bits per square inch.

64K-bit RAM

The uses of RAM (random-access read/write memory) are, of course, different from those of nonvolatile memory devices such as floppy disks. It is worth noting, however, that the theoretical data density of perpendicular magnetic recording exceeds the density of today's RAM. A 64K-bit RAM chip measures about one-quarter inch on each side. Therefore, it would be theoretically feasible to produce 16 such 64K-bit RAMs from a square inch of silicon. Thus, using the same hypothetical areal basis for comparison, the memory chip offers a density of 16 × 64,000 or 1024 × 10^6 bits per square inch, much lower than laser or magnetic technology.

Table 1 presents a brief comparison of the performance of four recording technologies as to versatility, lineal density, and areal density.

The Problem of Media for Perpendicular Recording

The limiting factor in the development of perpendicular recording technology has been finding a magnetic material that lends itself to this recording process. Today's answer is an alloy of chromium and cobalt, which is placed on the recording medium's surface in the form of hexagonal crystals that can support magnetization perpendicularly. In other words, the CrCo crystal's magnetizable axis lies at right angles to the medium surface and parallel to its crystallographic "C" axis.

The process of depositing the CrCo crystals is very sophisticated, involving the same sputtering techniques that are used in manufacturing semiconductor integrated circuits. (Using sputtering techniques, manufacturers coat a surface by putting it in a vacuum chamber that has a cathode consisting of the substance to be used as a coating. When the cathode is bombarded by positive ions, atoms of the coating substance are transferred uniformly to the surface being coated.) This sputtering technology needs to be modified in order to deal with the requirement to coat acres of substrate rapidly and economically and realize reproducible results. While these techniques are being developed and undoubtedly will be commercialized, such mass production equipment and techniques do not exist at the moment. It will probably be a year to 18 months before production equipment becomes available to fabricate media in commerical quantities. The development of perpendic-

www.americanradiohistory.com

COMPATIBLE WITH:
APPLE II™, APPLE III™,
FRANKLIN™, ORANGE™,
AND BASIS™.

make your apple go ZOOM!

Supercharge your Apple to go 50 times faster.

For even faster speeds, combine Axlon's RAMDISK 320™ with S&H PDE Software.

Here's a whole new way to polish up your Apple II™ or Apple III™. **RAMDISK 320™** from Axlon.

Thousands of users are discovering right now how the **RAMDISK 320™** can boost both memory and access speeds of their Apples. The ultrafast **RAMDISK 320™** is up to 50 times faster than standard floppy drives, and 10 times faster than hard disk drives. You can easily sort two full disks in 15 seconds.

Besides faster, error-free throughput, **RAMDISK 320™** is designed to save wear and tear on your floppy drives. There are no moving parts.

RAMDISK 320™ has its own power supply, plus three-hour battery backup. **RAMDISK 320™** draws no power from your Apple, and it retains data even when the Apple is turned off.

Your **RAMDISK 320™** solid-state memory add-on system is fully compatible with Apple DOS 3.3, SOS, CP/M™, Apple Pascal 1.1 and Pascal 4.0. (In fact, we'll give you drivers with each **RAMDISK 320™**.)

RAMDISK 320™ can help you zoom through a wide variety of tasks in the real world — word processing, accounting, data base management, software development, educational and scientific data processing, or whenever speed is of the essence.

RAMDISK 320™ comes with a plug-in, slot-independent interface card. And it includes a specially designed operating program, plus software for diagnostics, and fast-load copy routines.

Axlon offers **RAMDISK 320™** with a full one-year warranty.

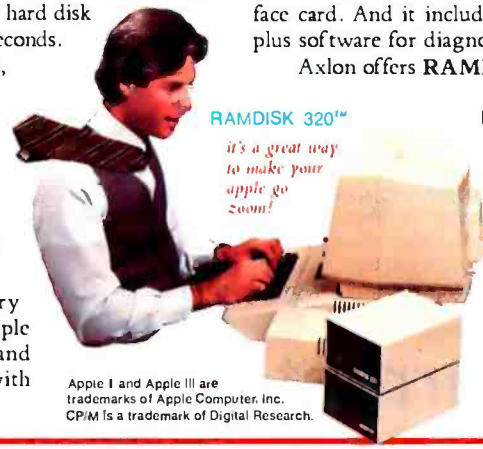

Apple I and Apple III are trademarks of Apple Computer, Inc.
CP/M is a trademark of Digital Research.

Interested Distributors, Dealers, and OEMs call (408) 945-0500 for information on national sales, support, and pricing program or write Axlon, Inc., 70 Daggett Drive, San Jose, CA 95134.

For consumer information on ordering the RAMDISK 320™, call 800-227-6703. In Calif. 800-632-7979.

AXLON

National Distributors: • **BYTE INDUSTRIES, INC.** Hayward, California (415) 783-8272 • **HIGH TECHNOLOGY** Florissant, Missouri (314) 838-6502 • **MARCEY INC.** Van Nuys, California (213) 994-7602 • **MICRO COMPUTER ELECTRONIC DIST.** Reading, Pennsylvania (215) 929-9484 • **MICRO D** Fountain Valley, California (714) 641-0205 • **NATIONAL MICRO WHOLESALE** Medford, Oregon (503) 773-1169 • **PMI MICRO WHOLESALERS** Fairfield, New Jersey (201) 227-8411 • **SKU** Berkeley, California (415) 848-0802 • **VIDEO THEATRE** Rochester, New York (716) 621-2003 • **COMPUTRAC** New Orleans, Louisiana (504) 895-1474

Circle 41 on inquiry card.

www.americanradiohistory.com

ular-recording technology may be media-limited for as many as 10 years due to cost.

The first floppy disks for perpendicular recording will probably cost about $20 each, compared with $5 to $10 for conventional disks. In the future, fresh materials and fresh processes for placing the material on the medium will cut costs. These fresh approaches should lead to an economical way to place the CrCo alloy, or some alternative material, on recording tape as well as disk.

Hardware and Applications

Floppy disks are expected to be the first commercial memory products to exploit the new perpendicular recording technology. They will offer 3 to 5 times the capacity of today's longitudinal floppy-disk systems and will be priced 30 to 70 percent higher. Later designs will push down the cost per bit even more. Vertimag Systems Corporation has demonstrated a prototype floppy-disk system that operates at 36,000 flux reversals per inch and provides 5 megabytes of total storage capacity. The system will eventually sell for around $500, with production expected to begin in 1984.

Following the market acceptance of floppy-disk memories based on perpendicular recording, a number of manufacturers are likely to launch hard-disk data-storage systems that challenge present Winchester systems. Because the Winchester disk is sealed in a clean-air environment, it lends itself to the meticulous mechanical engineering necessary to increase the number of tracks per inch and also to the control of the "flying height" of the head relative to the magnetic recording surface.

The potent combination of more tracks and perpendicular recording's tenfold increase in bits per track will give designers the headroom to continue product evolution through the rest of this century. To date, 5¼-inch Winchesters can accommodate more than 10 megabytes per disk. Memory designers have doubled capacity every two to three years for the past 25 years, and perpendicular recording provides the technological advance that can be expected to maintain this rate of progress for many years to come.

Digital Audio/Video Market

Current techniques for the digital recording of music consume memory capacity at a prodigious rate, and digital video applications consume recording surface area in amounts that are orders of magnitude greater than audio. This may serve as an incentive to put perpendicular recording to work in the digital audio/video market.

Digital-recording techniques first convert what the microphone "hears" into the binary language of computers. This is done by taking many instantaneous samples of the microphone's electrical output signal and converting these samples into their digital equivalents. It is these samples, which provide a digital replica of the original music, that are recorded for future playback.

To preserve music fidelity, it is necessary to take many "instantaneous" samples. Typically, the microphone's electrical output is sampled approximately 50,000 times per second. Moreover, because music spans a very wide range of loudness, from the nearly inaudible to the deafening, each of the 50,000 samples must be represented by a sizable digital word to accommodate the full dynamic range. The music industry has chosen to include 16 bits to allow a 64,000 : 1 range of loudness as the standard word "size" for music digitizing. Consequently, each of the samples taken 50,000 times per second produces 16 bits of digital information to be recorded for subsequent playback.

Any magnetic memory systems designed to handle digital audio applications must therefore accept data at the rate of 800,000 bits per second (50,000 × 16 = 800,000 bits per second). A conventional longitudinal-recording system capable of a 10,000-bit-per-inch recording density would therefore consume 80 (800,000/10,000) inches of tape per second. Perpendicular recording, at the prom-

new WICAT 68000 products



SYSTEM 160

This expanded MULTIBUS system is for those whose applications exceed the range of desktop computers, but whose budgets do not. The rack-mount configuration allows you to buy only what you need now and expand later. The 12 slot MULTIBUS chassis holds up to 4.5 MB of memory. A second drawer permits 4 10MB or 15MB Winchester disks with floppy and/or cartridge tape backup. Up to twelve terminals can be attached. High performance SMD disk and intelligent I/O ports will also be available. This is an ideal UNIX system.

Pedestal mount 12 slot chassis, IEEE 796 MULTIBUS . CPU, memory management. calendar clock. 512KB memory, 6 RS232C serial ports, 1 16-bit parallel port. MCS operating system. choice of one language $9390

DISK EXPANSION UNIT

This unit provides for System 150 additional disk storage capacity for the desktop WICAT150. Two 10MB or 15MB Winchesters can be included. The maximum configuration is two 15MB Winchester disk and cartridge tape backup for $10,170.

integral™ database and MenuSystem™

For the powerful WICAT 150, 160, and 200 computers, Concurrent provides application development tools to quickly develop your systems. MenuSystem allows you to define your screen by simply "painting" them on your terminal. Integral supports a network database that can directly model complex real world data structures.

To discuss your application, please write us or call **(513) 281-1270**

MULTIBUS TM Intel; UNIX TM Bell Labs; integral and MenuSystem TM Concurrent

Concurrent Corporation

1870 Madison Road Cincinnati, Ohio 45206

HIGH PERFORMANCE MICROCOMPUTERS FOR SCIENCE AND INDUSTRY

Circle 117 on Inquiry card.

www.americanradiohistory.com

VEDIT-THE CLEAR CHOICE FOR PROGRAMMING

PLUS FEATURES FOR FAST, EFFICIENT WORD PROCESSING

Increasing your productivity is what a good text editor is all about. VEDIT excels with a unique combination of powerful and easy to use editing features, customizability and complete hardware support. Compare VEDIT - you'll find everything you expect in a good editor plus many time saving features which only VEDIT offers.

VEDIT fully utilizes all function keys, or configures to any keyboard layout you are familiar with. VEDIT has helpful aids such as directory display, and you won't loose text if you run out of disk space - you can delete files or change disks.

Powerful TECO style command macros let you perform editing tasks you might otherwise not even attempt. Nearly impossible tasks for other editors (such as translations or extensive search/replace on many files), can be done automatically from a command file.

For program development VEDIT surpasses any other editor - with more extensive file handling, powerful command macro capability and special features for Pascal, PL/1, 'C', Cobol, Assembler and others. VEDIT reduces program editing time by 30% as compared to the best word processor.

For word processing, VEDIT has word wrap, adjustable margins, paragraph reformatting, word and paragraph functions, simple printing and more.

VEDIT supports practically every CRT terminal, video board, 8080, Z80 and 8086 computer. We have been consistently first to support new computers. And we support you with any technical assistance you need.

Please specify your microcomputer, video board or the CRT terminal version, 8080, Z80, or 8086 code, operating system and disk format.

Compare VEDIT's features:

True Full Screen Editing
Edit files one disk in length
Automatic Disk Buffering
Compact and Fast
Display of line and column #
Set/Goto text markers
'Undo' key to restore line
Automatic Indent/Undent
Adjustable Tab positions
Repeat function key
Text Move and Copy
10 Scratchpad Buffers
Load/Save buffers on disk
Powerful command macros
Directory display
Edit additional (small) files simultaneously
Insert another disk file
Unlimited file handling
Recovery from 'Full Disk'
Change disks while editing
Word Wrap, format paragraph
Simple Printing
Menu driven installation
Startup command file
Setup CRT function keys
Support newest CRT terminals
Support smart CRT functions
Customizable keyboard layout

IBM PC, Displaywriter ° Zeni h Z100 and Z89 ° NEC APC ° DEC VT180 ° Televideo 802
TRS-80 I, II and 16 ° Apple II Softcard ° Su erBrain ° Nor hStar ° Xerox 820 ° Cromemco
MP/M ° CP/M-86 ° Concurrent CP/M-86 ° MSDOS ° PCDOS

VEDIT - Disk and Manual
8080, Z80 or IBM PC. $150
CP/M-86 or MSDOS. . . . $195
Manual only $18

CP/M and MP/M are registered trademarks of Digital Research Inc. Apple II is a registered trademark of Apple Computer, Inc. MS-DOS and Softcard are trademarks of Microsoft. TRS-80 is a trademark of Tandy Corporation. IBM is a trademark of International Business Machines.

CompuView PRODUCTS, INC.

1955 Pauline Blvd., Suite 200 ° Ann Arbor, Michigan 48103 ° (313) 996-1299

Circle 115 on inquiry card.

www.americanradiohistory.com

ised 100,000 bits per inch, would cut this profligate use of tape down to 8 inches per second. Future digital-signal manipulation and compression will probably condense the amount of music data that must be recorded to preserve music fidelity. For example, it might be possible to develop techniques for recording only the *changes* in the music rather than, for example, continuing to record all data for notes that persist unchanged for substantial fractions of a second. Why record all 800,000 bits of data for a soprano who sustains the same note for an entire second? Such digital trickery, coupled with perpendicular recording's storage density, should put true digital music in the home in much less than a decade.

The Future Development of Perpendicular Recording

The new perpendicular-recording technology is being developed mainly by an alliance of Japanese industry and universities. In America, only the Magnetics Research Laboratory at the University of Minnesota operates at the forefront of this new science.

Reports from Japan provide evidence of perpendicular recording at 440,000 bits per inch. At this early stage of research, such density is probably accompanied by error rates that would be prohibitive in commercial applications. However, digital music recording is less critical in regard to data error, so such densities would represent another major step toward commercialization of digital audio systems. At a 440,000-bit-per-inch density, tape consumption for digital music would drop to around 2 inches per second. If the data can be distributed over several parallel tape tracks, tape consumption will be reduced even further.

The Japanese have a massive effort going on in perpendicular recording. On March 11 and 12, 1982, in Sendai, Japan, the first International Symposium on Perpendicular Recording was sponsored by Tohoku University and organized by the inventor of perpendicular recording, Professor Iwasaki. Some 320 people attended, and 23 papers were given at this meeting. Twenty of the papers were by Japanese authors; three by U.S. authors, all of them with Vertimag Systems Corporation. Only seven non-Japanese people participated: three from Vertimag and four from the rest of the world.

Virtually every well-known Japanese electronics company is working on perpendicular recording. We estimate that at least 400 researchers are working in Japanese universities and companies on perpendicular recording technology. The companies include, but certainly are not limited to, Hitachi, Toshiba, Fujitsu, Nippon Electric Company (NEC), NTT, Sony, Matsushita, and a number of smaller companies. The recent Toshiba announcement of a 3½-inch perpendicularly oriented floppy-disk system is a case in point. While this product is still two years or so from production, it represents Japan's level of achievement in this area.

Initially, the Japanese activity will probably be aimed at the consumer electronics industry because the Japanese dominate this area.

Ironically, many of the research managers of the Japanese companies were graduate students and postgraduate fellows under Professor Jack Judy, director of the Magnetics Research Laboratory at the University of Minnesota and one of Vertimag's founders. These graduate students, whose tuition and expenses were completely paid by their companies, are now the leaders of the Japanese technical thrust in perpendicular recording. This certainly does not speak well of the ability and awareness of American industrial management.

Once a medium is available and the technology of perpendicular recording is well understood and disseminated, there will be an urgent movement toward perpendicular-recording-based data-storage systems. Since "smaller is better," we may expect to see a continuing movement toward smaller drives, even more compact than the new 3¼- and 3½-inch drives, perhaps down to something as tiny as a 1-inch floppy-disk system. ■

TeleVideo® Users!
NOW 92 WORDSTAR® COMMANDS

The TV2000 is Designed for the 925,950, Intelligent I and 800 Through 816 Computers



Features:
- 46 single key stroke commands
- 41 shifted commands
- 5 MailMerge commands
- Faster cursor and keyboarding
- User-oriented command selection & location
- Soft switch activates the enhancement with no loss of TeleVideo attributes.

Includes:
46 replacement key caps
Replacement ROM

SUGGESTED RETAIL PRICE $220

Custom keyboard layout available for special codes or formats

WordTechSystems
953 Mountain View Dr. Suite 114
Lafayette, California 94549
(415) 254-7747

Trademark Wordstar® MicroPro International—TeleVideo® TeleVideo Systems, Inc.
MailMerge® MicroPro International

Circle 460 on inquiry card.

www.americanradiohistory.com

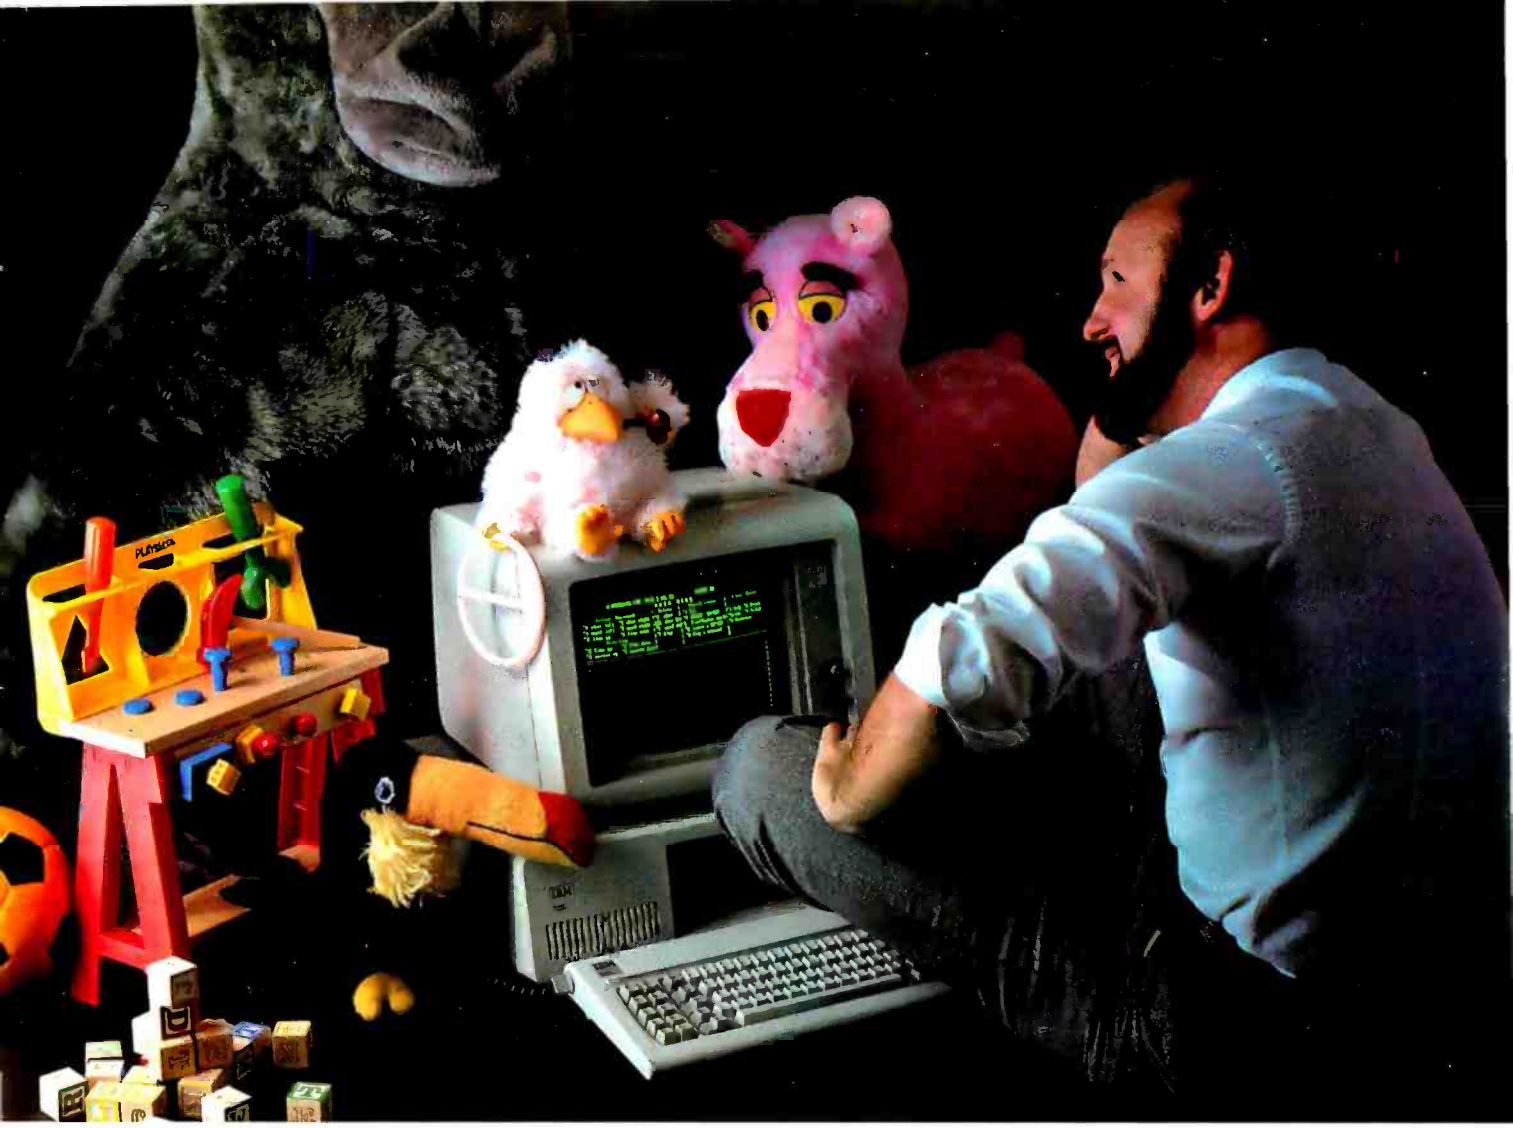

This Programming professional deserves a lot more from his personal computer.

He's earned it. As a seasoned professional, he's learned to master some of the world's most advanced programming tools. Tools specially designed to meet the everyday demands of programming experts.

But as the owner of a personal computer, he's come to expect less. Less performance. Less sophistication. And less flexibility.

Why should programming a personal computer be any different?

Prior to the announcement of micro/SPF™ development software, experienced programmers felt programming a personal computer was a lot like playing with a toy. You couldn't take it seriously.

But today, there's micro/SPF,™ a solution to elementary program editing tools now offered with most micro-computers.

With micro/SPF™ you get the same procedures and commands experienced programmers are accustomed to using at work. By mimicking features found in standard SPF software, micro/SPF™ provides all the sophisticated utilities programming professionals expect.

Programming experts can take advantage of skills they've spent years perfecting.

Now, for the first time, mainframe software is available for personal computers. SPF screens are fully reproduced in logical sequence and each screen is formatted identical to those found in the SPF system.

In addition, micro/SPF™ comes equipped with the same primary and line commands, tutorial messages and program editor (with program function keys) experienced programmers are used to.

Programming professionals who've spent years perfecting the art of writing sophisticated code deserve to work with state-of-the-art tools, not toys. Find out how micro/SPF™ can help you do work-compatible programming on your personal computer today!

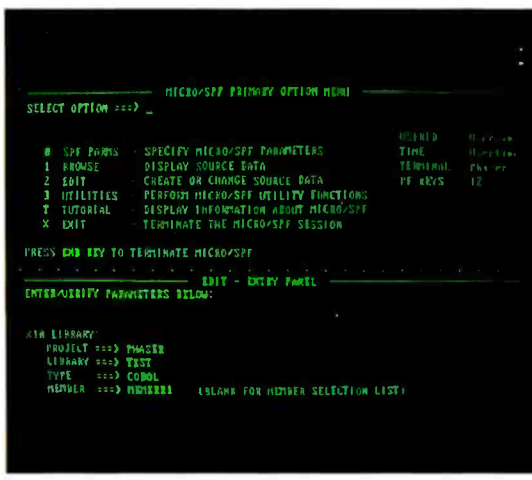

PHASER

PHASER SYSTEMS, INC 50 WEST BROKAW ROAD
SAN JOSE, CA 95110

Circle 346 on inquiry card.

www.americanradiohistory.com

Software for Writers

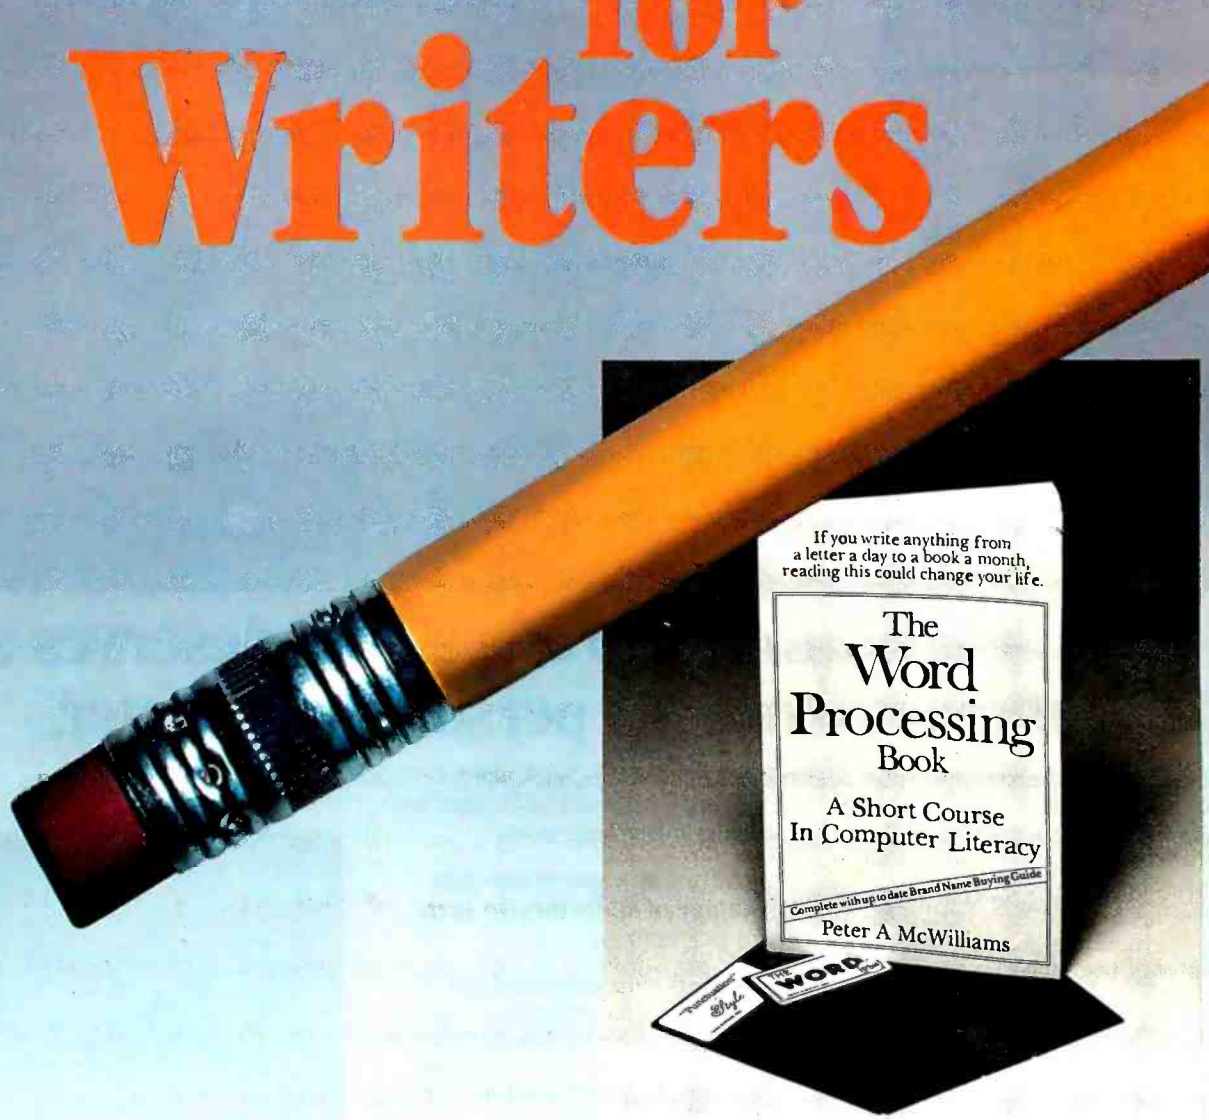

"Oasis Systems' software – unquestionably the best" . . . Peter McWilliams, author of the #1 best-selling book on word processing.

www.americanradiohistory.com

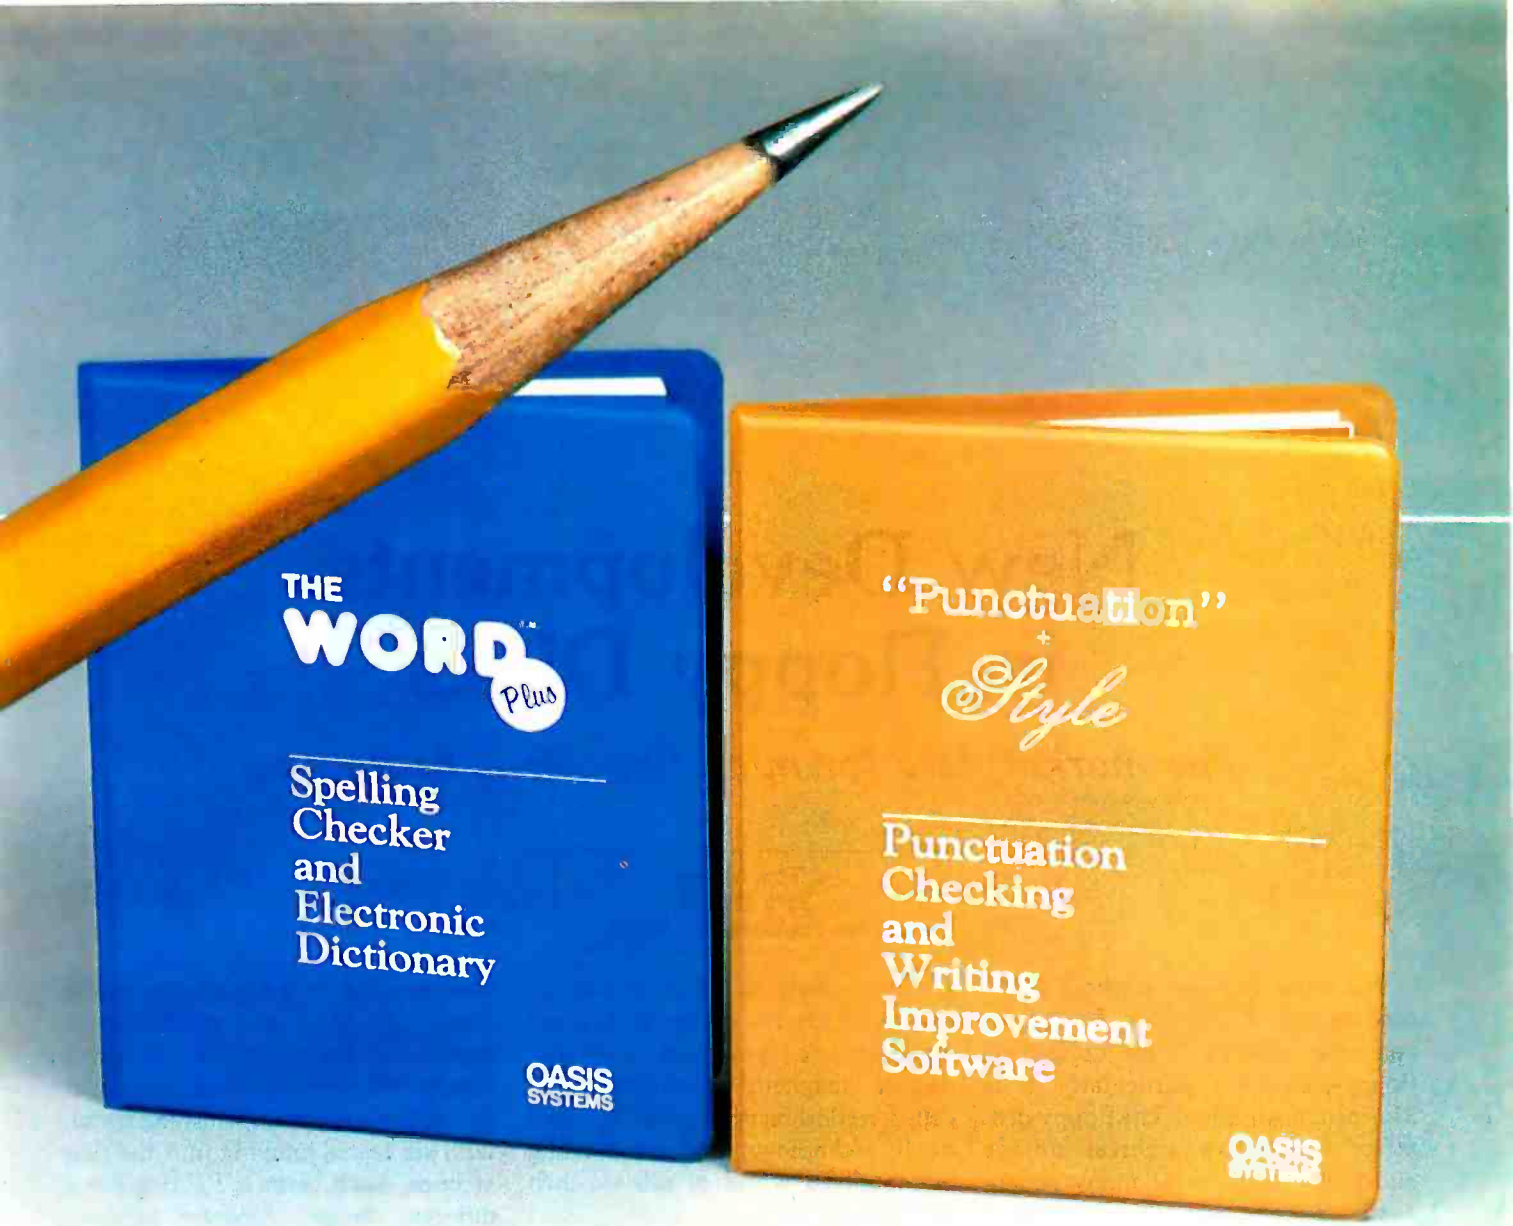

The WORD Plus is the standard by which other spelling checkers are measured. Here's why:

- *Real* 45,000 word dictionary.
- Shows errors "in-context."
- Interactive word look-up finds correct spelling for you and corrects at the push of a button.
- Hyphenates words automatically.
- Solves crosswords, puzzles, and anagrams.
- Works with almost any CP/M®, CP/M-86® or MS/DOS compatible word processing program (WordStar, Magic Wand, Spellbinder, Perfect Writer, Select, Final Word . . . and more!).

Punctuation & Style takes the worry out of writing by automatically catching dozens of different punctuation errors, both common and obscure. In addition, P&S catches unpaired format commands (underline, boldface, etc.), doubled words, and more.

P&S gives you a "critique" of your writing, suggesting alternatives for commonly misused or over-worked phrases. It also shows where active voice can replace passive voice to add clarity and precision.

Punctuation & Style is the perfect companion to The WORD Plus. It works easily with most CP/M word processors. (Available soon for CP/M-86 and MS/DOS.)

Call or write for complete information: 619-291-9489

OASIS SYSTEMS

2765 Reynard Way
San Diego, CA 92103

Circle 320 on Inquiry card.

Dealers contact:
SOFTWARE DISTRIBUTORS
1-800-252-4024 (in California)
1-800-421-0814 (outside California)

CP/M and CP/M-86 are registered trademarks of Digital Research, Inc.

www.americanradiohistory.com

New Developments in Floppy Disks

The marketplace for microfloppies is heating up.

Tom Moran
3895 22nd St.
San Francisco, CA 94114

The most popular method of recording and storing data for microcomputer systems is the ubiquitous floppy-disk drive, particularly in its 5¼-inch incarnation. The floppy disk offers inexpensive archival storage and is the medium for many widely available software packages. To survive in this large and robust market, manufacturers of floppy-disk drives are constantly trying to improve the price, capacity, size, and performance of their products.

Some companies are pursuing new technologies while others are relying on enhancements of proven methods. Those who are working with new technologies feel that their innovative methods are necessary to maintain the constant increase of data storage capacity that has occurred up to now. Proven methods appeal to companies that feel that advances can be made without the risks inherent in using less well known procedures.

Three different technologies that are most likely to influence floppy-disk products for computer systems and electronic typewriters are perpendicular magnetic recording (also called vertical recording, or VR), Bernoulli technology, and the exciting but muddied world of sub-5¼-inch floppy disks.

Perpendicular magnetic recording (PMR) is expected to increase the storage capacity of disk drives by realigning the magnetic material on the disk surface to achieve a higher density of bits per inch on a disk. Bernoulli technology is a noncontact method of recording data in which the read/write head flies in close proximity to the surface of the disk. This, in combination with other techniques, enables a floppy disk rotating at 1500 rpm (revolutions per minute) to perform very much like a Winchester hard-disk drive.

"Aflopalypse" Now

The term "three-ring circus" doesn't adequately describe the efforts on the part of manufacturers to make smaller floppy-disk drives for lighter, more portable systems (see photo 1). A number of companies are now making or are about to make 3-inch, 3¼-inch, and at least three different, incompatible 3½-inch floppy-disk-drive systems. The situation is like a tag-team wrestling match with six teams jumping into the ring at once. Each team is fighting for a different design. Alliances between the teams have been made and broken. However, everyone in the contest is striving for the same objective—to have a product with the prestigious and lucrative title of "Industry Standard" for the sub-5¼-inch market.

Previously, every disk-drive standard has ultimately been decided by the marketplace and never by a committee. The advantage of being the first drive maker to ship significant quantities of a sub-5¼-inch floppy disk belongs to Sony, which makes a drive called the OA-D30V that stores 437K bytes on a 3½-inch metal hub disk within a hard plastic cartridge. But an alliance of 19 companies has gone before the ANSI (American National Standards Institute) X3B8 Committee advocating substantially different specifications from those of the Sony microfloppy disk. The

About the Author

Tom Moran is a freelance technical writer living in San Francisco. He has written several articles for Electronics *magazine.*

Circle 105 on inquiry card. ⟶

www.americanradiohistory.com

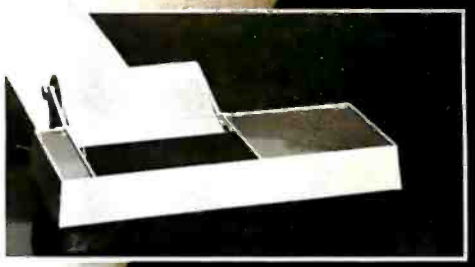

printer for your hand-held computer, telex communication, home computer, banking application, or medical instrumentation. Standard product comes with both Serial RS232 Asynchronous and Centronic parallel printer interface.

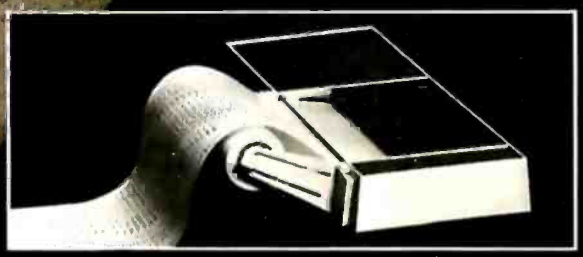

- Serial transmission speed switch selectable for 110 Baud rate to 4800 Baud rate.
- Data transfer for speed at 160 CPS.
- Graphic capability. 280 dots across.
- Small enough to be hand-held, compact, slimline, lightweight, quiet, and portable.
- Ideal for Sharp, Epson HX20, Atari, T.I., or Commodore Computers.

$145

printelex

computer peripherals

1117 Venice Boulevard Los Angeles CA 90015 (213) 298-1297 Telex: 194561 LSA

Sharp, Epson Atari, T-I, And Commodore are trademarks of Sharp Corporation, Epson America Corp., Atari & Warner Communications Co., Texas Instruments, and Commodore Corp.

www.americanradiohistory.com

loosely knit alliance, referring to itself as the Microfloppy Standards Committee, includes media makers Verbatim Corporation, BASF Systems Corporation, Xidex, Brown Disc, Memorex, and Dennison Kybe Corporation, and drive makers Shugart Associates Inc., Micro Peripherals Inc. (MPI), Olivetti Peripheral Equipment, Luctor Corporation, and the Remex Division of the Ex-Cell-O Corporation.

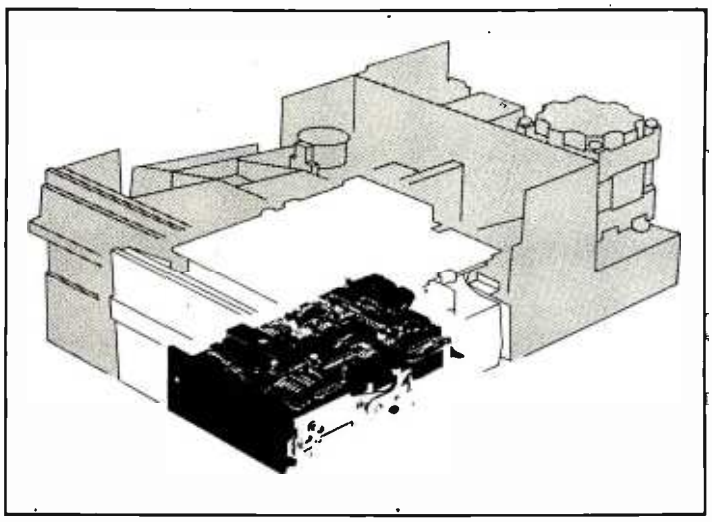

Photo 1: *"The Incredible Shrinking Floppy-Disk Drive." The Tandon TM35 3½-inch microfloppy-disk drive is shown in comparison with standard and half-height 8- and 5¼-inch drives. Although occupying far less volume, the microfloppy has seven-eighths of the data storage capacity of the 5¼-inch drives and more than one-half of the capacity of the 8-inch drives.*

The Microfloppy Standards Committee invited Sony and the 3-inch-drive advocates, Hitachi, Matsushita, and Maxell Corporation of America, to make technical presentations to the committee, which they did. General agreement was reached on the need for a floppy-disk drive with disks small enough to fit into a shirt pocket. Everyone attending the meeting also thought that a hard shell would be preferable to the standard vinyl floppy-disk jacket. However, the Hitachi/Matsushita/Maxell group thought that the drive should be as small as possible, while the Microfloppy Standards Committee preferred not to push the technology, opting instead for the larger 3½-inch standard it considers more reliable.

Amdek Corporation of Elk Grove Village, Illinois, is marketing the Hitachi/Matsushita/Maxell-type drive. Amdek is offering two of the 3-inch drives as a unit with a total unformatted capacity of 1 megabyte. The unit is compatible with the 5¼-inch industry-standard format and became available for end users in December 1982. The suggested retail price of the Amdisk-3 Micro-Floppy-disk Cartridge system is $799 for the two-drive unit and cables if an additional controller card is not required. Presently Amdek expects to have controller cards for the Apple II and III and IBM PC.

Micro Peripherals Inc. introduced its model 301F 3-inch design at COMDEX. It was the first American firm to manufacture and market a 3-inch drive and endorse the Hitachi/Matsushita/Maxell standard. Its drive has a capacity of 250K (unformatted) bytes per side with a "flippy" feature enabling both sides to be used for data storage. The drive features a band-type head positioner to achieve a 3-ms (millisecond) track-to-track seek time and uses standard 5¼-inch specifications such as 300-rpm rotation, 40 tps, 100 tpi, and a 250K-bit-per-second transfer rate. Disks are provided by Maxell, TDK, and others.

Sony and the Microfloppy Standards Committee disagreed on many points, including the preferred disk rotation rate.

Sony and the Microfloppy Standards Committee disagreed on many particulars. The most important is the committee's wish to make 3½-inch drives that are plug-compatible with standard 5¼-inch drives so that designers can use standard controllers and users can run standard software, thus keeping redesign costs to a minimum.

Sony stuck by its 600-rpm disk-rotation rate, while the committee chose 300 rpm. Sony's argument for the faster rotation is that, on smaller drives, the innermost tracks pass under the read/write head too slowly and the data-transfer rate is impaired. The committee says that the slower rotation it proposes will keep the data rate compatible with 5¼-inch drives and that the high speed Sony advocates would generate too much heat, causing reliability problems due to expansion and contraction of the disks during use. Again for reasons of compatibility with extant 5¼-inch drives, the committee opted to widen the read/write window to allow more tracks without greater track density, recommending 40 or 80 tracks per side (tps) on either one or both sides of the disk. Currently, the highest capacity in this format would be 1 megabyte of unformatted storage.

Most of the physical dimensions of the standard suggested by the Microfloppy Standards Committee are the same as those of the Sony drive. However, the medium used by Sony is nominally 580 oersteds, 100 microinches thick, while the committee's standard would use a medium of 650 oersteds, 40 to 50 microinches thick. [**Editor's note:** *An oersted is a unit of magnetic resistance used to quantify the performance of magnetic media.*] Members of the committee say that Sony's medium is unique, but a number of companies, including some that are not members of the committee, are developing new media similar to that specified by the committee. Although the committee agrees with Sony's use of hard-shell cases for the media, it wants to add further protection in the form of an automatic shutter that will open the

www.americanradiohistory.com

Tek's most successful scope series ever: At $1200-$1450, it's easy to see why!

Wide-range vertical sensitivity: Scale factors from 100 V/div (10X probe) to 2 mV/div (1X probe). Accurate to ±3%. Ac or dc coupling.

Two high-sensitivity channels: dc to 60 MHz bandwidth from 10 V/div to 20 mV/div; extended sensitivity of 2 mV/div at > 50 MHz.

Sweep speeds: from 0.5 s to 50 ns. To 5 ns/div with X10 magnification.

Delayed sweep measurements: Accurate to ±3% with single time-base 2213; to ±1.5% with dual time-base 2215.

Complete trigger system. Includes TV field, normal, vertical mode, and automatic; internal, external and line sources; variable holdoff.

Probes included. High-performance, positive attachment 10-14 pF and 60 MHz at the probe tip.

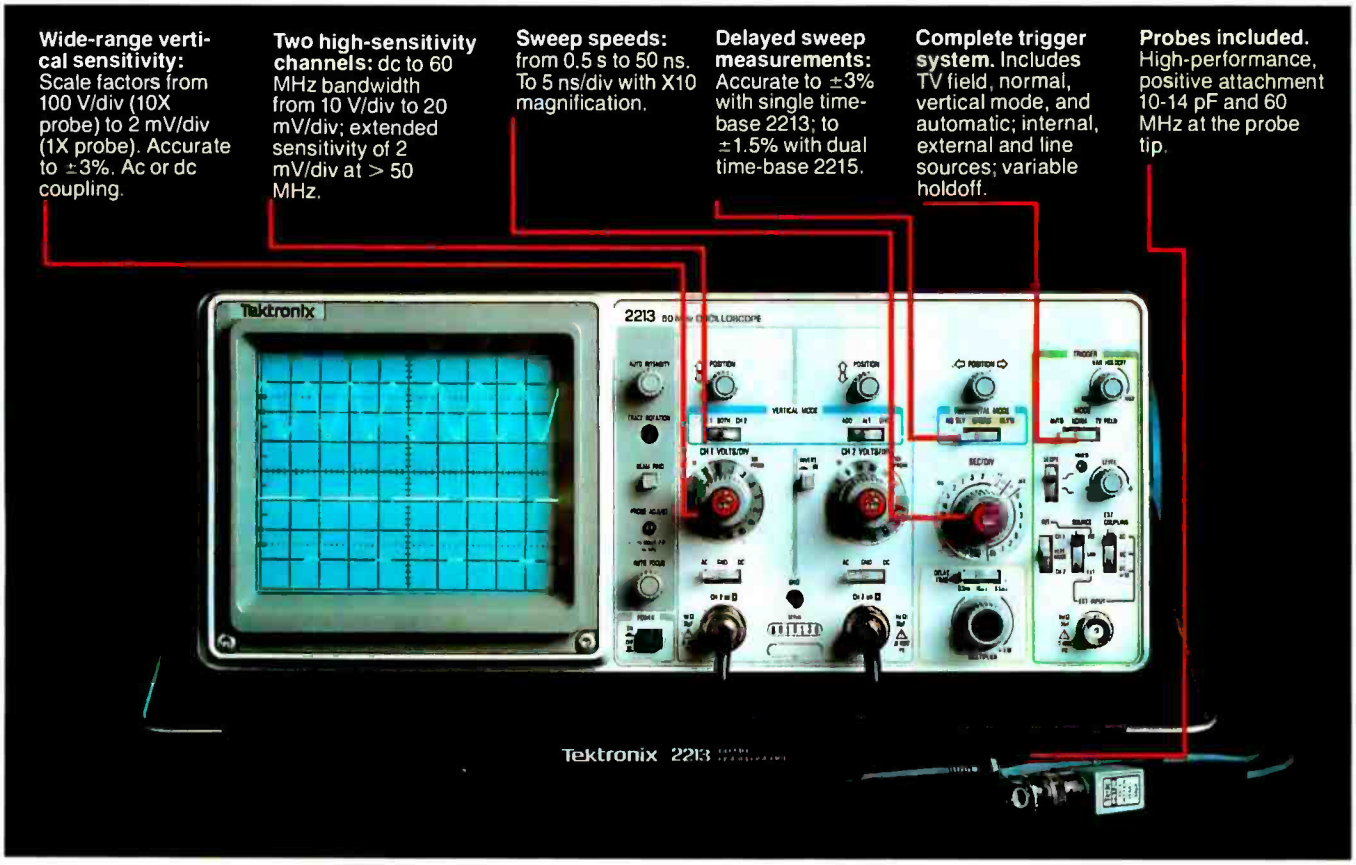

In 30 years of Tektronix oscilloscope leadership, no other scopes have recorded the immediate popular appeal of the Tek 2200 Series. The Tek 2213 and 2215 are unapproachable for the performance and reliability they offer at a surprisingly affordable price.

There's no compromise with Tektronix quality: The low cost is the result of a new design concept that cut mechanical parts by 65%. Cut cabling by 90%. Virtually eliminated board electrical connectors. And eliminated the need for a cooling fan.

Yet performance is written all over the front panels. There's the bandwidth for digital and analog circuits. The sensitivity for low signal measurements. The sweep speeds for fast logic families. And delayed sweep for fast, accurate timing measurements.

The cost: $1200* for the 2213. $1450* for the dual time base 2215. You can order, or obtain more information, through the Tektronix National Marketing Center, where technical personnel can answer your questions and expedite delivery. Your direct order includes probes, operating manuals, 15-day return policy and full Tektronix warranty.

For quantity purchases, please contact your local Tektronix sales representative.

Order toll free: 1-800-426-2200 Extension 48

In Oregon call collect: (503) 627-9000 Ext. 48

*Price F.O.B. Beaverton, OR. Price subject to change.

Tektronix®
COMMITTED TO EXCELLENCE

Copyright©1982, Tektronix, Inc. All rights reserved. TTA-338

www.americanradiohistory.com

CAST BETTER, FASTER SPELLS WITH OUR CI-C86 C COMPILER

Weave a spell with the CI-C86 C Compiler, especially designed for use with:

- CPM86 and MPM86
- MS-DOS
- IBM Personal
- IBM Displaywriter
- DEC Rainbow
- Victor 9000
- Sirius
- NEC APC
- Zenith Z100
- Lomas 8086
- Altos 8600
- Compupro 86/87
- Seattle
- Eagle
- Columbia 1600
- And Many More

CI puts all the magic of C at your fingertips with all of K&R, a full support library, 8087 support and much more.

Merlin would approve!

Disk and documentation $395.
Overseas airmail $20.

For further information, please contact:

Computer Innovations, Inc.
75 Pine Street
Lincroft, New Jersey 07738
Telephone: (201) 530-0995

C86 and CI-C86 are trademarks of Computer Innovations, Inc
CPM and MPM are trademarks of Digital Research
MS-DOS is a trademark of Microsoft
IBM is a trademark of International Business Machines
DEC is a trademark of Digital Equipment Corp

Circle 102 on inquiry card.

head-access window when the disk is inserted into the drive and close it when the disk is removed.

The major backers of the Microfloppy Standards Committee are Shugart and Verbatim, which expect to have limited production quantities of drives and media available early in the third quarter of 1983. Industry analysts believe that 4 million sub-5¼-inch drives will be produced by all manufacturers in 1983. According to Malcolm Northrup, president of Verbatim, in a few years shipments of all sub-5¼-inch systems may grow as large as 151 million units.

Two years from now Toshiba Corporation of Tokyo expects to be in production of its recently announced PMR 3½-inch 3-megabyte floppy-disk drive. Although a lot of development is left to be done, the company clearly hopes to get a jump on competitors by announcing its new technology now. The drive's hard plastic cartridge with autoshutter contains a 75-micron-thick polyester disk that is sputter-coated on both sides with a 0.5-micron layer of cobalt chromium. The cartridge is 90 by 92 by 3 mm. The recording density will be 50,000 bits per inch (bpi) at 144 tracks per inch (tpi) compared to 5500 bpi at 48 tpi for conventional longitudinal data recording. This is 7 or 8 times the density of most longitudinal recording. The entire drive measures only 100 by 130 by 40 mm.

In the 3¼-inch corner, two dropouts from the Microfloppy Standards Committee who submitted their own proposal to the X3B8 committee, drive-maker Tabor and disk-maker Dysan, have recently been joined by Seagate Technology, which will become a second source for Tabor drives.

Tabor calls its 3¼-inch floppy-disk drive the Model TC 500 Drivette and says it's the first in a family of drives with different capacities. The single-sided drive uses a soft vinyl jacket and records in either FM or MFM (frequency modulation or modified frequency modulation) on 80 tracks at a density of 140 tpi. When recording is in FM, the bit density is 4625 bpi, and when in MFM, it is 9250 bpi. Data transfer is 250K bits per second

www.americanradiohistory.com

IT'S TIME KIDS STARTED USING STRONG LANGUAGE.

We encourage it.

Because now the most powerful educational language is available on the Apple Personal Computer.

Presenting Apple Logo.

It's not just a programming language for computers, but a learning language for people.

Enough so that anyone, working with Apple Logo, can easily learn the programming principles once reserved for college courses.

Apple Logo encourages you to break problems into small steps, and then shows you how to make those steps automatic.

It does all this interactively.

For instance, if you accidentally type "foreword," instead of forward, Apple Logo responds with "I don't know how to foreword."

There is no such thing as a mistake with Apple Logo, only logical statements telling you what needs to be done to make the program work. So the student programs the computer. Not the computer the student.

And as you learn, Apple Logo learns with you. So whether you're a student of 5 or 55, you'll always be challenged—but not overwhelmed.

Apple Logo runs on the Apple II with 64K. And it comes from Apple, the leading personal computer company in education—with the largest library of courseware at all levels.

Apple Logo. It can make getting to know a computer the most positive of learning experiences.

Your kids will swear by it.

The personal computer.

apple

For more information, call (800) 538-9696. In California, call (800) 662-9238. Or write: Apple Computer Inc., 20525 Mariani Avenue, Cupertino, CA 95014.
Apple® Logo is a product of Logo Computer Systems, Inc., 222 Brunswick Boulevard, Point-Claire, Quebec, Canada H9R1A6.

Circle 487 on inquiry card.

www.americanradiohistory.com

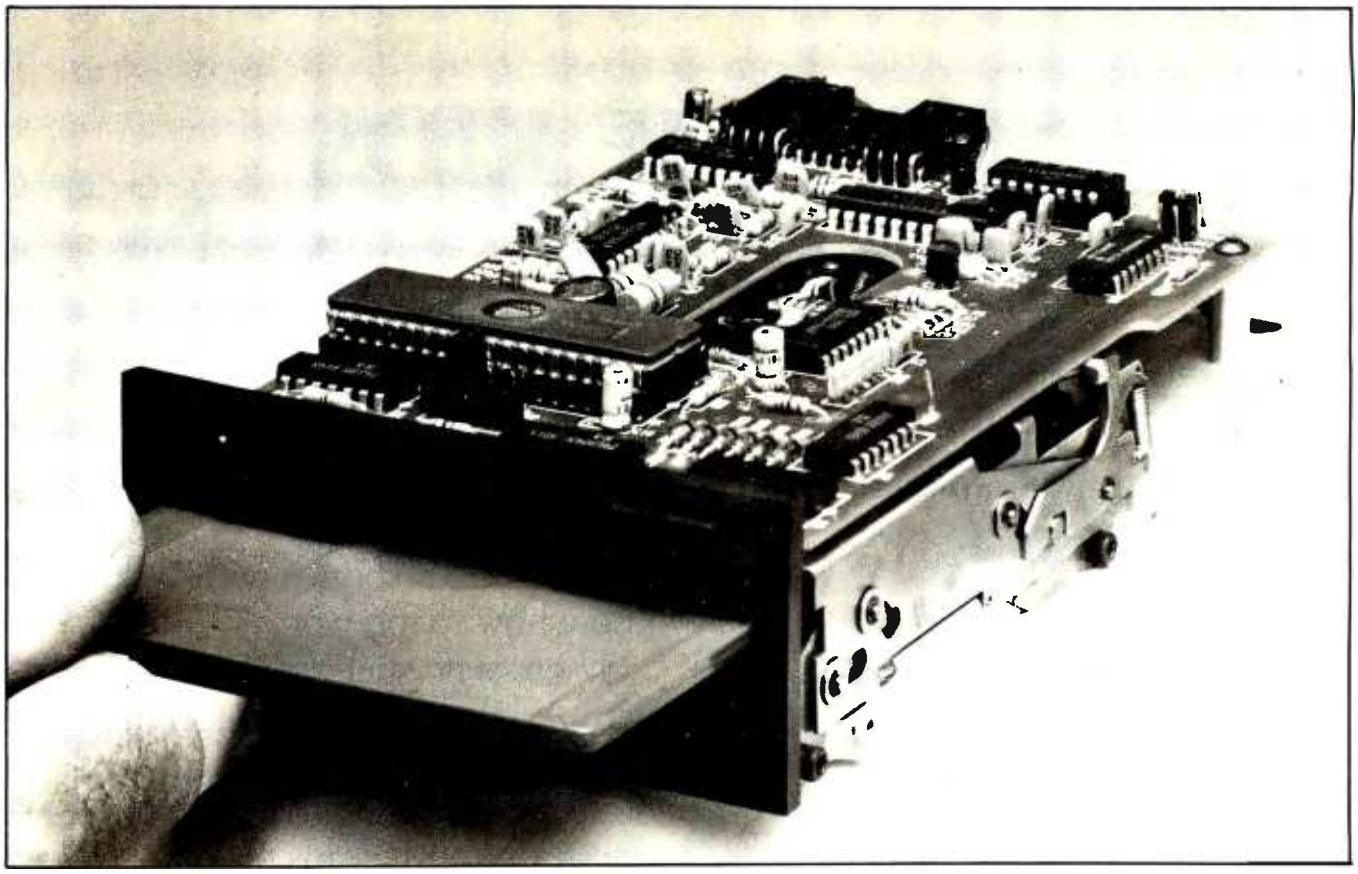

Photo 2: *The Tandon TM35-2 microfloppy-disk drive, which is compatible with standard 5¼-inch drive controllers, has a rigid cartridge enclosing the magnetic medium.*

(FM). The 1.625- by 4- by 5.5-inch drive weighs 1.6 pounds and records 250K bytes (unformatted) per disk in FM and 500K bytes in MFM. The company, started in January 1982, is based in Westford, Massachusetts. Some units were in early evaluation in December, and volume production started in January of this year.

According to Tabor, Seagate had previously agreed to make drives in the Sony format but decided not to when Sony would let it assemble only Sony components instead of making complete drives. Another problem was that Seagate thought that double-sided versions of the Sony drive would be unstable. However, Sony can take some comfort from a $30-million contract with Hewlett-Packard for drives to be integrated into HP's systems. Hewlett-Packard has indicated that it chose the Sony system because it is already in production and that HP will support the Sony system as the standard.

Another disk-drive manufacturer, Tandon Corporation, has recently introduced its TM35 Microline 3½-inch microfloppy in two models (see photo 2). The TM35-2 is compatible with the standard 5¼-inch interface, and the TM35-4 is compatible with the Sony OA-D30V microfloppy's interface, software, and disks, but it records data on both sides of its disk. Both models of the TM35 store 875K bytes using both sides of the disk. The TM35-4 has an average access time of 70 ms, and the TM35-2, 100 ms. The devices measure 1⅝ by 4 by 6½ inches. The TM35-4 records 7610 bpi at 135 tpi and 70 tps, while the TM35-2 records 3617/7610 bpi, 135 tpi, and 40 tps. The two models have an onboard Intel 8084 microprocessor to control spindle speed and head positioning, and a brushless direct-drive DC motor. Tandon is using the Sony-type disks for the drives and says that an automatic shutter is available for the rigid cartridge.

Tandon says that it's not hedging bets, just providing products for different markets. According to Tandon representative Al Erickson, Sony and Hewlett-Packard will be putting Sony-type drives into instruments and new office equipment that have nothing to do with the 5¼-inch-drive market. Tandon expects there will be more than one market and more than one application for both of these drive forms. In fact, Tandon withdrew from the standards committee because president Jugi Tandon felt that market acceptance will determine the standard as it has done before. The company planned to deliver evaluation units in the first quarter of 1983 with high-volume production following later in the year. In large OEM (original-equipment-manufacturer) quantities, the TM35s will cost $200 to $250 each.

Many companies don't seem terribly worried about the eventual outcome in the sub-5¼-inch market. Most express confidence that the standards they are backing will do well and add that, even if the market goes against them, it won't take them more than six months to a year to retool to meet the new demand.

Even if the magnetic dust clears up tomorrow and one microfloppy-drive format emerges victorious, it will still

www.americanradiohistory.com

DISC LESS™

The DISC-LESS approach to S-100 architecture increases system performance so well that we guarantee satisfaction.

BENCHMARK

	2.2	3.0	DISC-LESS
Write 100 files to disc	3.26 min.	2.22 min.	25 sec.
General sort functions	5.25 min.	4.17 min.	15 sec.
Search and replace	2.30 min.	1.45 min.	3 sec.
Document recall	45 sec.	30 sec.	2 sec.

Upgrade your existing S-100 system to DISC-LESS

- "Ram-Disc 256"
- "Rom-Disc" with CP/M 2.2 in ROM
- All software included

$1295.00

Complete single-user DISC-LESS Board Set with CP/M 2.2 In ROM

- Z-80A CPU (SBC-200)
- 256K bank select RAM (XRAM III)
- Single board controller handles four 5¼" or 8" drives, any mix (Versafloppy II)
- "Ram-Disc 256"
- "Rom-Disc" with CP/M 2.2 in ROM

$2750.00

Now, add the DISC-LESS network controller to existing S-100 systems and convert to network operation quickly and easily.

- Base band coax
- Broad band coax
- 2 megabit/sec.
- CSMA
- Guaranteed message service
- CP/M compatible
- Turbodos compatible
- S-100 single board design

$950.00

Under DISC-LESS operation networks use the "Ram-Disc" as local on-line cache storage for non-stop computing.

CP/M 3.0 Single-User Board Set

- SBC-200
- Bank select XRAM III 64K or 256K*
- Versafloppy II
- CP/M 3.0 bank select with documentation

$925.00

*Systems with 256K RAM, **$1295.00**

Turbodos Single-User Board Set

- SBC-200
- Bank select XRAM III 64K
- Versafloppy II
- Turbodos with documentation

$1295.00

Versafloppy II Disc Controller

- **CP/M 3.0 bank select FREE**

Complete S-100 DISC-LESS System

- Low profile system design
- CPU, 64K RAM, floppy controller
- "Ram-Disc 256"
- "Rom-Disc" with CP/M 2.2 in ROM
- Qume Model 102 video terminal
- Single 5¼" or 8" floppy drive

$4950.00

Complete DISC-LESS Word Processing System

- Full DISC-LESS system
- "Wordstar" in ROM
- Letter-quality printer, 25cps.

$6999.00

SONICS
MICRO SYSTEMS INC.
1500 N.W. 62 STREET
FORT LAUDERDALE, FL 33309
1-800-327-5567
IN FLORIDA CALL: 305-776-7177

at Sonics "We are Technology"

Circle 400 on Inquiry card.

www.americanradiohistory.com

have an inherent problem. The standard microfloppy-to-be may well be compatible with 5¼-inch controllers and software, but incompatibility between the 3½-inch microfloppies and 5¼-inch floppy disks will be axiomatic.

Perpendicular Magnetic Recording

Although a lot of room still exists to increase track densities and thus capacity, the limitations of conventional recording techniques are beginning to be reached, and perpendicular, or vertical, magnetic recording seems a likely next step (see also "The Promise of Perpendicular Magnetic Recording" by Clark E. Johnson Jr., page 56). In media in use now, the magnetic particles are laid end to end along the direction of the media's tracks. PMR "stacks" the magnets side by side vertically. This not only increases the number of bits that can be stored in the same space, it reduces the self-demagnetizing effect, which lessens as the length-to-thickness ratio of a magnet decreases. One way to keep a favorable length-to-thickness ratio is to decrease the thickness of the medium by developing a thin-film disk. Unfortunately, although thin-film disks have been used in well-functioning prototypes many times, no one has been able to produce them economically and reliably in large quantities. In the words of one industry observer, "thin-film media have been just around the corner for nine years, and they're still not here. Something tells me they never will be."

Because PMR records the bits "into" the medium rather than along it, the length is determined by the thickness of the substrate. And, as density increases along the track, the length-to-thickness ratio is actually improved, so that the self-demagnetizing effect approaches zero. However, this does not mean that there are no problems with this technology. In the past, prominent industry analysts have expressed skepticism about the possibility of recording vertically, saying that recording takes place not vertically or horizontally but somewhere in between. In fact, the greatest need in working with PMR is to find a medium substrate that can be vertically oriented in a consistent pattern on the disk's surface.

The best substrate candidate so far seems to be cobalt chromium, which can be deposited in hexagonal crystals on the disk's surface under carefully controlled conditions. The best method found so far for coating disks is *vacuum sputtering*, which, although slow, has been extensively perfected by the semiconductor industry, which uses sputtering to coat silicon wafers.

Vertimag Systems Corporation of Minneapolis, Minnesota, expects to start production of a 5¼-inch floppy-disk drive using PMR in 1984. Already demonstrated in prototype, its system will provide 5 megabytes of storage in a form compatible with the SA400 standard from Shugart. In fact, the drive will use Shugart's me-

Soup to Nuts.

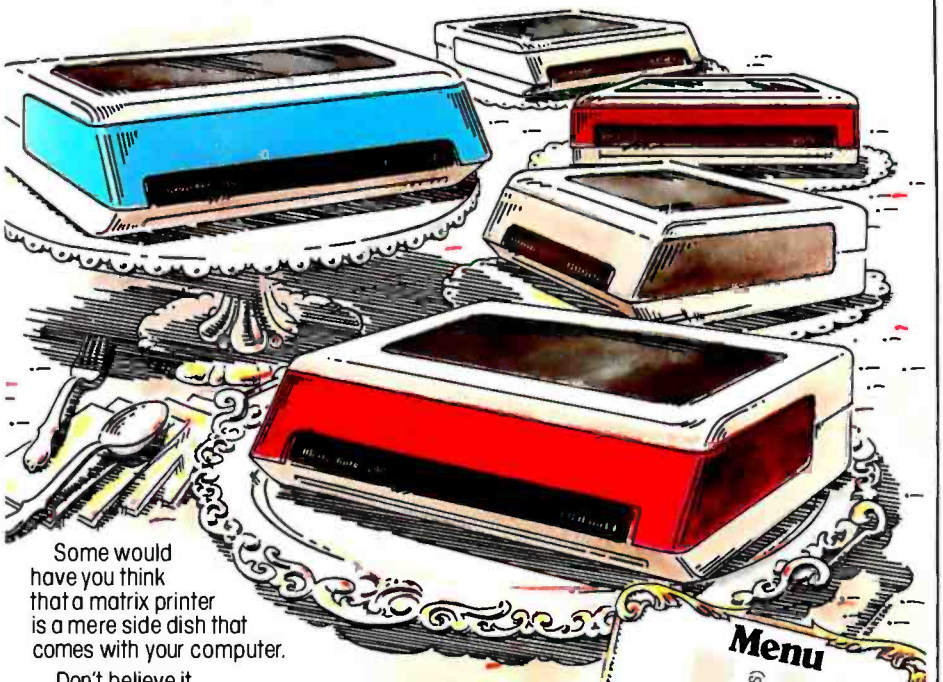

Some would have you think that a matrix printer is a mere side dish that comes with your computer.

Don't believe it.

What you get out of your printer is what you get out of your computer. If your printer is small, slow, noisy or unreliable, your computer will be limited, sluggish, irritating, or inoperable. Just telling it like it is.

That's why Infoscribe has come up with a gourmet line of multifunction matrix printers specifically for business and professional users.

You can switch from high-speed data processing to business letters, at will; handle up to 16-inch-wide paper; make up to five crisp carbons; generate gorgeous graphics in up to eight colors; and enjoy truly elegant and incredibly quiet operation, day-in and day-out.

Menu

MODEL	DRAFT (CPS)	CORRESPONDENCE (CPS)	LETTERS (CPS)	GRAPHICS (72 x 72)	GRAPHICS (144 x 144)	PROGRAMMABLE FONTS	COLOR
500	150	75					
1000	200	100					
1100	200	100		X		X	
1200	200	100	40	X	X	X	
1500	400	200	40	X	X	X	X
				X		X	

Check the menu for the printer that meets your exact needs. Why go with the computer manufacturer's combo plate when the same money will let you buy Infoscribe, a la carte?

Your favorite computer dealer or systems specialist will be delighted to arrange a demonstration for you. Or contact the *matrix d'*: Infoscribe, 2720 South Croddy Way, Santa Ana, California 92704, USA, Phone (714) 641-8595, Telex 692422.

PRINT WITH INFOSCRIBE

Circle 210 on Inquiry card.

Circle 435 on Inquiry card. ⟶

www.americanradiohistory.com

the monitor that stands alone

TAXAN manufacturers a complete line of high quality monochrome (green and amber), as well as medium and high resolution RGB color monitors. Our monitors are in use around the world on IBM and Apple as well as most other personal computers.

See your local TAXAN dealer, or call us for details.

TAXAN

TSK Electronics Corporation
18005 Cortney Court
City of Industry, CA 91748
(213) 810-1291

www.americanradiohistory.com

Circle 34 on Inquiry card.

If you use a Word Processor, you need

GRAMMATIK™

Beyond Spelling Checking

Grammatik can find **over 15 different** kinds of common errors missed by simple spelling checkers alone, including punctuation and capitalization errors, overworked and wordy phrases, and many others. Use Grammatik with Aspen Software's spelling checker Proofreader, featuring the Random House Dictionary®, or with your current spelling checker for a complete document proofreading system.

Read what the experts say:

"The perfect complement to a spelling checker."
Alan Miller, Interface Age, 5/82

"A surprisingly fast and easy tool for analyzing writing style and punctuation."
Bob Louden, InfoWorld, 12/81

"Anyone involved with word processing in any way is encouraged to get this excellent program."
A.A. Wicks, Computronics, 6/82

"A dynamic tool for comprehensive editing beyond spelling corrections."
Dona Z. Meilach, Interface Age, 5/82

"A worthy and useful addition to your word processing software."
Stephen Kimmel, Creative Computing, 6/82

Works with CP/M®, IBM-PC®, TRS-80®

Grammatik $75.00
Proofreader $50.00

Order directly from Aspen Software, or see your local dealer. Specify your computer system configuration when ordering! Visa, Mastercard accepted.

Random House is a registered trademark of Random House, Inc. Other registered trademarks: CP/M: Digital Research -- TRS-80: Tandy Corp. -- IBM: IBM -- Proofreader, Grammatik: Aspen Software Co.

Aspen Software Co.

P.O. Box 339-B Tijeras, NM 87059
(505) 281-1634

chanical components and Vertimag's own cobalt-chromium-sputtered disks. Data will be stored at 96 tpi, and up to 36,000 bpi will be recorded on the inner tracks using a form of MFM. According to Clark E. Johnson Jr., president of Vertimag, the drive will have a data transfer rate of 1.7 megabits per second and will sell for less than $500 in OEM quantities.

Flying with Bernoulli Technology

Another company that's using innovative techniques is Iomega Corporation of Ogden, Utah, which is making a 10-megabyte 8-inch floppy-disk drive, the Alpha 10, using Bernoulli technology. With this technique, founded on principles discovered 200 years ago by Swiss physicist Daniel Bernoulli, the head "flies" less than 10 microinches above the surface of the medium. The drive uses a large flat surface called the Bernoulli plate that is positioned 0.005 inch from the disk, which spins at 1500 rpm. The spinning of the disk creates an airflow moving from the middle of the disk radially outward to its circumference. This lowers the air pressure and pulls the medium evenly toward the Bernoulli plate. A hole in the plate allows the medium to be accessed by the read/write head, which is hydrodynamically mounted. The airflow ensures that the disk is reliably positioned and that it does not touch the plate. This noncontact arrangement means less wear and greater reliability than is normally found, for example, in Winchester hard-disk drives. In fact, Iomega says that its 8-inch floppy disk has reliability advantages over Winchesters because the design of the head assembly causes contaminants to be flushed out of the system away from the read/write area and because the airflow cushion damps shock and vibration of the disk and read/write head configuration, resulting in less chance of head crashes. Because the head and disk are brought together by the Bernoulli effect, not by springs, any shock to the system will act to decouple them, thus avoiding a collision and resulting in a soft data error instead of a catastrophic failure. When the passing contaminant has cleared the area, the head and disk recouple.

Because the system's compliance is in the disk itself, no gimbal arrangement is necessary for the arm and read/write head. In fact, the drive has only two moving parts, the rotary head actuator and the spindle motor.

The Alpha 10 has a closed-loop embedded servomechanism in each track, allowing 300 tpi recording. The present bit density is 24,000 bpi using run-length-limited code, and Iomega is looking closely at the possibility of increasing that with PMR. Data is transferred at 1.13 megabytes per second. Production of the Alpha 10 started in September 1982. Meanwhile, Iomega is working on a 5¼-inch drive called the Beta 5 that uses the same technology. The new drive will store 5 megabytes of formatted data, and the disk will rotate at 1964 rpm. The Beta 5 will use 434 tpi and 17,000 bpi and have a standard (Winchester) data-transfer rate of 5 megabits per second. Iomega says that the Bournelli technology translates well to a smaller size because smaller disks are easier to stabilize. Both the 5¼-inch drive and the Alpha 10 use the industry-standard disk interface.

Although Iomega is currently the only manufacturer shipping Bernoulli drives, the company believes Bernoulli technology is the way of the future because of its inherent advantages of a cheap medium, Winchester-like performance and capacity, and extreme simplicity of design. Second sources of the Alpha 10 are expected to be announced soon, and Iomega says that IBM and others are working on similar systems.

High Capacity with Proven Technology

Drivetec Inc., of San Jose, California, founded by Herb Thompson, one of the founders of Shugart Associates, is a company that believes in fine-tuning proven technology. The year-old company's first product, announced in November 1982, is called the Drivetec 320 Superminifloppy and offers 3.33 megabytes of unformatted storage in a half-height

www.americanradiohistory.com

RANDOM ACCESS IN A PRINTING BUFFER?

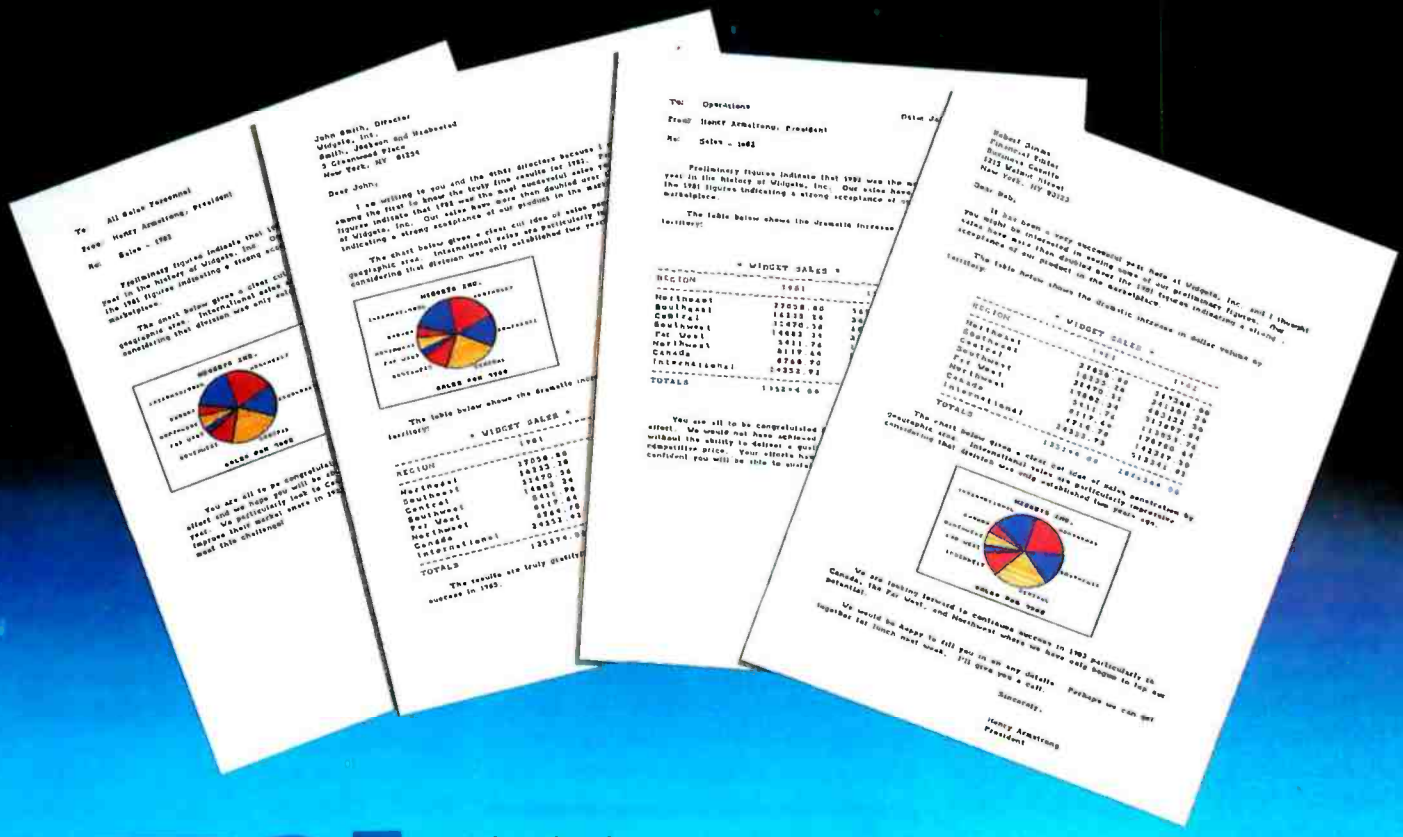

YES!

Introducing . . .
The IS PipeLine™ Random Access Printing Buffer.

Insert pictures, graphics or spread-sheet data into reports. Duplicate form letters—automatically changing addresses on each. Now, all your programs can work together to produce printed output.

For the first time ever, here is a buffer that not only frees your fast computer from your slow printer but also allows you to rearrange, compose and copy your data on its way to the printer.

- Random Access Printing—stores paragraphs or pictures for printing in any order—any number of times.
- FIFO Printing—conventional first-in first-out operation.
- Compression of data for efficient utilization of memory space.
- Ability to interrupt long-term buffer operations for straight-thru short-term printing.
- Simple Erase feature to clear buffer.
- Automatic duplication capability.
- Easily expandable, by you, from 8K Bytes to 128K Bytes.

The IS PipeLine is Universal—it works with any parallel (Centronics*—style) computer/printer combination. A special version is available for PKASO™ Printer Interfaces.

The IS PipeLine is a self-contained unit with operating manual, cables and power supply included.

For more information on the truly revolutionary IS PipeLine Random Access Printing Buffer, call us today.

Interactive Structures Inc.
146 Montgomery Avenue
Bala Cynwyd, PA 19004
Telephone: (215) 667-1713

*Centronics is a trademark of Centronics Data Computer Corp.

Circle 220 on Inquiry card. The IS Pipeline™ Random Access Printing Buffer is patent pending.

www.americanradiohistory.com

5¼-inch drive. The Drivetec 320 has a proprietary track-following embedded servo system that allows recording of 192 tpi, and its linear recording density is approximately 9908 bpi (see photo 3). A two-stepper system uses one stepper for large head movements and another for fine adjustments, so that the two recording heads can be moved in 200-microinch increments. The medium is a special preformatted 50-microinch-thick oxide coating on a platter that allows much higher bit densities and track densities than conventional 100-microinch-thick media. The drive has an onboard microprocessor, a brushless DC motor, and buffered track seek and is designed to be downward compatible with 48-tpi disks. Data is transferred at 500K bits per second.

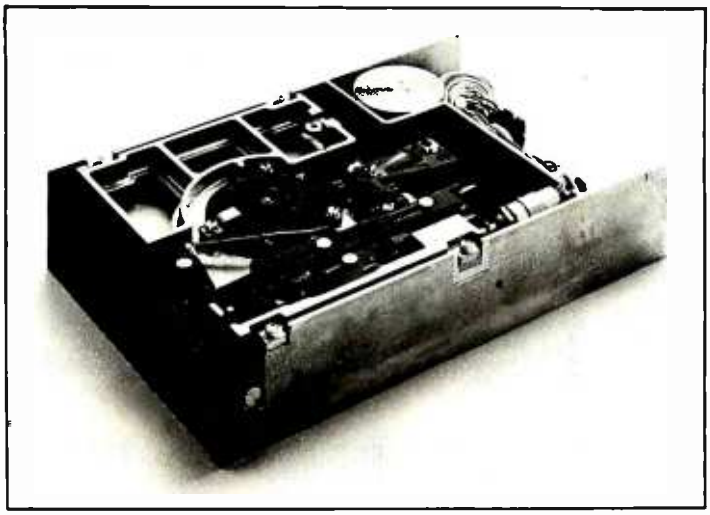

Photo 3: *Drivetec 320 Superminifloppy. Based on established technology, the Drivetec offers 3 megabytes of storage in a half-height 5¼-inch drive.*

Drivetec expects to ship evaluation units in the first quarter of 1983, with manufacturing start-up scheduled for the second quarter. The Drivetec 320 will cost less than $325 each in OEM quantities of 1000.

Drivetec's Herb Thompson believes that long-term trends will be the fine tuning of established technologies. "I built the first floppy disk at IBM in 1967," he says, "and it really hasn't changed a bit since then, except that performance has dramatically increased. It still has a long way to go, of course, but I don't want to argue with success. Why should I go off and start up with thin-film heads and exotic media when the chances of failure are so high?" Thompson goes on to say that PMR is another buzzword like thin-film heads and bubble memories. "I wouldn't hold my breath waiting for vertical recording because it requires thin-film heads and they're not cost-effective and I don't see them becoming so." He also doesn't think that cobalt chromium substrates will be the medium of the future unless there's a major breakthrough. "I saw plated media 20 years ago; IBM's done a huge amount of research on them and threw them out. I wouldn't risk my company on anything less than proven technology."

Half-Height Floppy Disks

Tandon, Shugart, and Qume are now offering half-height 5¼-inch floppy-disk drives, the form that is the most serious threat to microfloppies in the portable, low-cost, and small-computer-systems markets. Shugart is producing two models, the SA455 and the SA465. The SA455 uses 48 tpi and stores 250K or 500K bytes, while the SA465 has a 500K-byte single-density and 1-megabyte double-density capacity with 96 tpi (all unformatted). Both double-sided drives are compatible with the standard floppy-disk interface and, like other half-height drives, use brushless direct-drive DC motors that reduce the size of the drives by eliminating belts, pulleys, and bearings used with AC motors. Evaluation-model shipping was due in the fourth quarter of 1982, with volume production to follow in the first quarter of 1983. In quantities of 5000, the SA455 is priced at $160 and the SA465 at $195. Average access time is about 94 ms, and data-transfer rate is 125K or 250K bits per second depending on whether single or dual density is used.

Specially formulated disks from Verbatim Corporation will be used by Apple Computer and Amlyn in new drives.

Tandon's half-height 5¼-inch drive is offered in two versions, one costing $100, and the other, a mechanism-only version, is $50 in very large OEM quantities. The TM50 uses double-density single-sided recording and 48 tpi to store 250K bytes in a 5.75- by 1.625- by 8-inch package. Average access time is 267 ms.

Qume's half-height 5¼-inch drive offering is the Qumetrak 142, a double-sided 48-tpi drive that stores 500K bytes unformatted. Its average access time is 175 ms. High-volume OEM prices are expected to be less than $150 each.

NEC has introduced a half-height 8-inch floppy-disk drive, the FD 1165, with storage capacity of 1.6 megabytes using double density and both sides of the disk. The FD 1165 is priced at $525 each for quantities of 100; in quantities of 300 the cost is $395 each.

Super Disks

Specially formulated disks from Verbatim Corporation will be used in new drives from Apple Computer and Amlyn. The disks will have a 50-microinch coating of cobalt-impregnated gamma iron oxide with a magnetic resistance of 625 oersteds instead of the standard 300 oersteds and will have a 17-year warranty. Apple will use the disks in two new full-sized drives, the Apple Unifile and the Apple Duofile. The Unifile will store 871K bytes formatted on 62.5 tpi at 10,000 bpi. The Duofile will contain 1.7 megabytes formatted. The Apple drives are designed

www.americanradiohistory.com

Chairman of the Boards

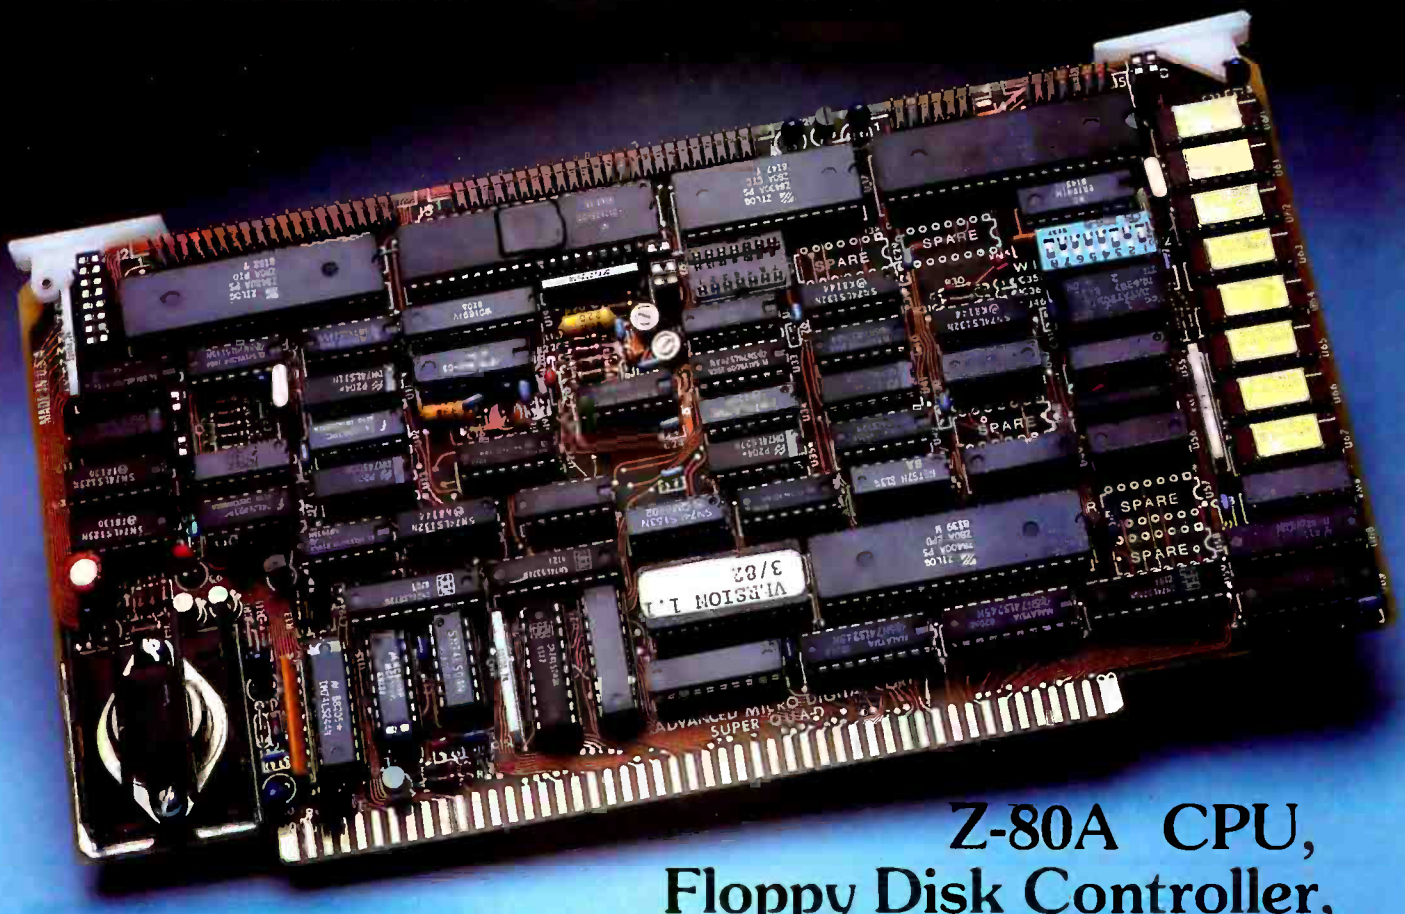

Z-80A CPU, Floppy Disk Controller, 64K of Memory, Serial & Parallel I/O Ports . . . all on a SINGLE S-100 BOARD!

Advanced Digital is the leader in S-100 single board computers. Our attention to quality workmanship, our outstanding performance and proven reliability have made our SUPER QUAD "computer on a board" number one.

Now SUPER QUAD® has been elected "Chairman of the Boards" in the expanding Multi-Processing marketplace. SUPER QUAD functions as the Bus Master and takes charge of many SUPER-SLAVE® processor boards.

SUPER QUAD is so complete, it actually replaces the traditional 4-board S-100 computer and for only $875.00.

Look at these features:

- IEEE S-100 Standard
- Z-80A CPU
- 64K of Bank Select Memory as well as extended addressing
- Double density floppy disk controller. Both 8" or 5-1/4" Disk Drives
- 2 serial & 2 parallel I/O ports (RS-232 and intelligent hard disk interface).
- 2K or 4K of monitor EPROM
- Runs with CP/M®, MP/M® and turbo-DOS™
- One year warranty.
- Free copy of bios disk.

Advanced Digital's SUPER-SLAVE processor boards are the ideal directors to work with the Chairman of the Boards and Turbo-DOS® operating system in a multi-user, multi-processor system.

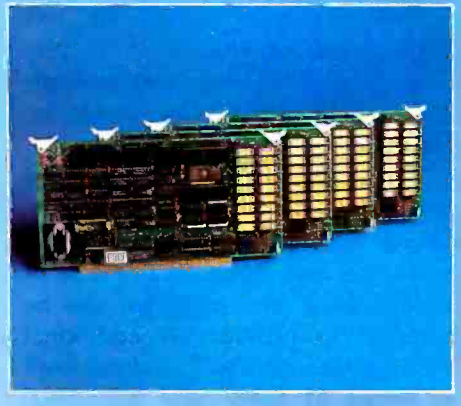

ADVANCED DIGITAL CORPORATION

Ask about our new HDC-1001 Hard Disk Controller for both 8" or 5-1/4" hard disk drives, only $500 retail. For more information, write or call: Sales Dept.

12700-B Knott Street • Garden Grove, California 92641 • (714) 891-4004 TELEX 678401 tab irin

® Registered Trademark of Digital Research Corp.
™ Registered Trademark of Software 2000 Inc.

© Copyright 1981 Advanced Digital Corp.

www.americanradiohistory.com

Circle 413 on inquiry card.

Innovators in Winchester Subsystems!

Tallgrass Technologies presents a family of Winchester HardFiles and removable cartridge media that has set the industry standard on performance and reliability. With integral tape backup and formatted capacities from 6.25 Mb to 20 Mb, Tallgrass has a HardFile to answer the most serious data management problems.

Let Tallgrass introduce you to our family of Winchester subsystems and watch your personal computer transform into a powerful data processing system.

From $3095.00 suggested retail including integral backup.

Tallgrass Technologies Corporation
9207 Cody, Overland Park, Kansas 66214
(913) 492-6002
Available from COMPUTERLAND and other participating dealers.

for the Apple III and for backup of the 5-megabyte Profile Winchester disk drive. The rigid jacket of the Verbatim disk will resist heat distortion up to 160 degrees F.

Multicartridge Drives

The Amlyn drive belongs to the multicartridge drive category. It uses five-disk Mini Pack cartridges, each storing 1.6 megabytes of unformatted data on one side using 170 tpi at 9500 bpi and 154 tracks. The unformatted capacity of each cartridge will be 8 megabytes, and the user will be able to remove one or all of the five 5¼-inch disks at will.

Another drive that uses multiple disks is the Mega-Mate, made by Mega-Data Computer Products Inc. of Overland Park, Kansas. The Mega-Mate contains an interchangeable 40-disk magazine that stores 5 formatted megabytes on one side of all the disks. The magazine can be reversed to provide an additional 5-megabyte capacity. The drive itself is priced at $695, and additional magazines are $70.

Conclusion

The current revolution in data-storage technology poses an interesting problem for end users. On one hand, the size reduction and increased storage of the new microfloppies offers several advantages to small-computer-system designers. Drives could be incorporated into a handier, less conspicuous area on a computer. Two microfloppies could, for example, be placed underneath a standard-sized keyboard.

On the other hand, with the proliferation of different formats and data-storage technologies, end users could find themselves stuck with an orphan disk-drive system. And the subsequent lack of inexpensive media and support could become very expensive.

Although microfloppies and improved data-storage technologies will have their market, there is a simpler method for increasing the transportability and convenience of existing 5¼-inch floppy disks. Just have all the shirt makers agree upon a standard 5½-inch pocket. ■

BYTE's Bugs

Gremlins Gobble Up-Arrows

It looks like gremlins have struck once again. This time they invaded the program listing in "High-Speed Pascal Text File I/O" by K. Brook Richan and James S. Rosenvall (January 1983 BYTE, page 454). The program listing for FASTIODEMO (listing 1) should have up-arrows in several places but, unfortunately, doesn't. Anyone interested in obtaining a copy of the corrected listing may do so by sending a legal-size self-addressed envelope with $0.37 U.S. postage to:

Pascal Listing
Attn: Ms. Lisa Steiner
BYTE
POB 372
Hancock, NH 03449

Please allow 4 to 6 weeks for delivery. ■

www.americanradiohistory.com

$3,995

You can't buy an S-100 hard disk system for less.

5 MEGABYTES.

$3,995

That's the full price for the complete Decision I™ computer. Including an S-100, (IEEE-696) 14-slot motherboard, 64K of RAM, DMA floppy and hard disk controllers, a 5 Megabyte hard disk, a 200K floppy disk drive, one parallel and three serial ports. Plus, CP/M® 2.2 and Microsoft® BASIC-80.

5 MEGABYTES, PLUS.

$4,400

For another $405, you double your floppy capacity to 400K. And, you get over $1,200 worth of applications software: WordStar,® Correct-It™ spelling checker, the LogiCalc™ spreadsheet, and the Personal PEARL™ relational data base manager.

NOW, MULTI-USER. For an additional $1,995, you get a package that allows you to add two more users to your system. Which makes the Decision I the lowest priced multi-user, multi-tasking system you can buy. The package adds an additional 192K of RAM, plus Micronix,™ Morrow's UNIX™-like operating system. The OS includes a CP/M emulator which allows you to use CP/M software in a multi-user environment.

BUY IT YOUR WAY. Single-user or multi-user/multi-tasking. Or, buy a single user system now and expand it later. No matter how you buy it, you can't buy more performance for less.

MORROW DESIGNS

MORROW DESIGNS ☐ 600 McCormick St. ☐ San Leandro, CA 94577 ☐ (415) 430-1970

WordStar is a registered trademark of MicroPro, Inc., CP/M is a registered trademark of Digital Research, Inc. Decision I, Micronix, and Correct-It, are trademarks of Morrow Designs

Personal PEARL is a trademark of Relational Systems, Inc. UNIX is a trademark of Bell Laboratories, Inc. LogiCalc is a trademark of Software Products International Microsoft is a registered trademark of Microsoft Corporation

Circle 295 on Inquiry card.

www.americanradiohistory.com

Introducing the portable computer for professionals on the move. Hewlett-Packard's new HP-75.

A decade ago, we introduced the world's first scientific pocket calculator and rendered the time-honored slide rule obsolete.

Now we're introducing the HP-75 portable computer. And if press reaction is any indication, history is about to repeat itself.

As small as a book. As powerful as a personal.

Desktop-computer power in a handsome 26-ounce package. That's the HP-75. It's just 10 inches by 5 inches by 1¼ inches.

But don't let the compactness fool you. Inside its rugged case lies a 48K-byte, ROM-based operating system. With a comprehensive, 147-command instruction set that helps you write hard-working, memory-efficient BASIC programs.

Plug-in ROM ports let you add up to three 32K-byte software modules—modules that solve tough problems *without* sacrificing user memory.

And that user memory gives you up to 24K bytes of program and data storage.

It all adds up. A fully loaded HP-75 is a 168K-byte computing powerhouse in calculator clothing.

Want more? A built-in magnetic card reader provides a convenient, inexpensive way to store and retrieve programs or data.

The HP-75's typewriter-like keyboard means rapid, accurate entry of text or data. And when we say you can touch type on it, we *mean* you can touch type on it.

Those keys, by the way, can be redefined with your favorite commands or programs. Up to 196 unique key combinations in all.

Immediate, convenient access to your most frequently used programs.

Thanks to the HP-75's multiple-file structure, programs, data and text can be named, simultaneously stored in memory, and programmed to interact with each other.

Add continuous memory, and you've got a computer that's designed to solve problems on the go. Simply load your favorite files and enjoy immediate access to any or all of them. The files are retained in memory until *you* decide to delete them—even when the machine is turned off.

Time and appointments to keep you on schedule.

The TIME key brings to display the day of the week, date and time to the nearest second.

The APPOINTMENT feature reminds you—an hour from now or a year from now—of things you have to do. You can have a silent message on the display, any one of six alarms, or a combination of both.

Even if the machine is turned off, it will "wake up" and alert you of an appointment. Or it will execute programs or control peripherals according to predetermined schedules.

In an environmental test, for instance, where readings are taken every half hour, the HP-75 can make sure its owner gets the weekend off.

Software tailored to solve your specific problems.

HP-75 software is now available in areas such as math, engineering, finance, and statistics. With spreadsheet analysis* on the way.

Our plug-in math module,* for instance, solves polynomial roots, evaluates integrals, and performs finite Fourier transforms.

With our text-formatter module,** you'll compose memos, letters, and short documents virtually anywhere; then print them out when you return to your home or office.

In addition, our third-party software program assures you of ever-expanding software variety.

If you're a volume purchaser or OEM, give us a call. We can help you create custom HP-75 systems with special plug-in modules, magnetic cards, digital cassettes, and keyboard overlays.

Peripherals for a total computing package.

The HP-75 is equipped with the Hewlett-Packard Interface Loop, giving you a choice of 15 peripherals. (And that choice is expanding. The HP-75 *can* work simultaneously with up to 30.)

In a battery-powered briefcase system weighing about seven pounds, you might have the 24-character printer, digital cassette drive and acoustic modem.***

A desktop system might include the 80-column impact printer, full-color graphics plotter, and 12-inch video monitor.

And the HP-75 can "talk to" other computers, peripherals, and instruments with our HP-IB (IEEE-488),** RS-232,* and GPIO interfaces.

In summary, the HP-75 is the heart of an extremely versatile system, in addition to its stand-alone capabilities.

Manuals to make sure you get the most from your machine.

Chock-full of examples and helpful hints, our owner's manual will get you up and running in short order. And it's organized to help you access the information you need to get on with the job at hand.

A supplementary reference guide provides a concise summary of the computer's operating protocol and instruction set.

The value you're looking for.

What is the price of all this power in this compact package? $995.**** A lot less than you might pay for a personal computer you can't take with you.

See the HP-75 today. It's the smart choice for professionals on the move.

For the authorized HP dealer or HP sales office nearest you, call TOLL-FREE 800-547-3400 (Oregon, Alaska, Hawaii: 503-758-1010). *TTY users with hearing or speech impairments, dial 503-758-5566.*

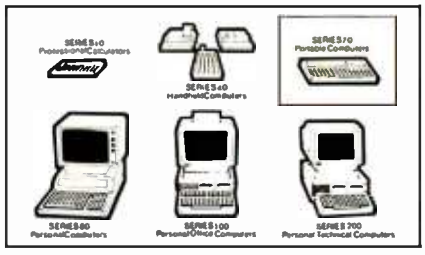

*Available May 1, 1983.
**Available March 1, 1983.
***Call our toll-free number for availability.
****Suggested retail price. May vary outside U.S. Peripherals and software not included.

Circle 200 on Inquiry card.

HEWLETT PACKARD

www.americanradiohistory.com

www.americanradiohistory.com

HP-75 SPECIFICATIONS

Size and weight: 10" X 5" X 1¼" 26 oz.
48K-byte, ROM-based operating system:
• 8-bit CMOS CPU • Multiple file structure in continuous memory • Instruction set: 52 system commands, 43 BASIC commands, 41 numeric functions, 7 string functions, 6 time-mode commands, 16 arithmetic/logical/relational operators
Numeric precision:
• Real—12 digits ($\pm 9.99999999999 \times 10^{\pm 499}$)
• Short—5 digits ($\pm 9.9999 \times 10^{\pm 99}$)
• Integer—5 digits (±99999)
Time/appointments:
• Perpetual clock/calendar • 12- or 24-hour format • Appointment control of command/program execution
Memory:
• User (RAM)—16K bytes, expandable to 24K bytes • Operating system (ROM)—48K bytes • Plug-in software (ROM)—up to 96K bytes (3 32K-byte modules)
Typewriter-like QWERTY keyboard:
• 65 keys • 194 redefinable key combinations • "Hidden" numeric keypad
Integral mass storage: hand-pulled card reader (1.3K bytes per card)
Built-in interface: HP-IL; choice of 15 peripherals
Power supply: 3 AA NiCad batteries (AC adapter/charger included)
Liquid-crystal display: 32-character window on 96-character line

Optical-Memory Media

How optical disks work, who makes them, and how much data they can hold.

Edward Rothchild
Optical Memory Newsletter
POB 14817,
San Francisco, CA 94114

Laser videodisks and players have been commercially available for over five years, but the commercial use of this technology for storage of digital data has been delayed. Although building optical mass-storage drives is not a trivial exercise, perfecting and fabricating the optical media has proved to be an even more difficult task. Nevertheless, it appears likely that a variety of American, European, and Japanese firms will present prototype optical-memory systems and media at computer and micrographics trade shows this spring, with "beta testing" (initial user tests) occurring by year-end. Commercial availability finally seems to be at hand.

I'll now try to describe the composition and performance characteristics of the various types of nonerasable optical-memory media that will most likely be used with the first-generation optical drives, and I'll indicate possible directions in which the industry can be expected to move as the second-generation drives and erasable media are introduced toward the end of the 1980s.

About the Author

Edward S. Rothchild is a consultant and publisher of the Optical Memory Newsletter Including Interactive Videodisks.

Lack of Disk Standards

Just as a wide variety of magnetic disk drives and media have been designed for different applications, performance characteristics, and price, so, too, a wide range of optical drives and media will eventually be available. Unfortunately, the optical-recording community has made little movement to agree on standards for the infant industry. Recent meetings have not even been able to agree on the size of the center hole in the disk, let alone the disk's composition, diameter, thickness, or performance. Every manufacturer is trying to position its product to become the de facto standard.

Disks are being made now in 12- and 14-inch diameters, with 8-, 5¼-, 3-, and possibly 2-inch disks likely in the near future for use in small computers. Media for both the current least-capacity and greatest-capacity systems are rectangular cards or slides, and some firms are offering experimental optical reel-to-reel tapes and cassettes for a variety of applications, large and small.

The most important reasons for the delay in introduction of optical recording technology are problems with the stability, archivability (shelf life), data integrity, and producibility of the media themselves. No one knows for sure just which material or combination of materials will gain acceptance in the marketplace. Many major computer companies planning to introduce optical media are hedging their bets by developing several different types.

Starting an Industry

No one wants the optical-memory industry to suffer the embarrassing fiasco (and lawsuits) experienced by those firms trying to commercialize video tape for document storage and retrieval in the 1960s. Before any significant part of the computer-user community can be expected to transfer existing records or store new data on a new medium, that medium must be reliable and widely perceived to be so.

The first generation of optical mass-storage devices will be based almost exclusively on lasers writing data by distorting thin metal films. In some systems, the laser burns holes in

www.americanradiohistory.com

The CONCEPT AVT

Because VT100 users deserve more than just VT100 compatibility.

THE CONCEPT DISPLAY TERMINAL

VT100 compatibility is one thing, but eight pages of memory, programmable function keys, windowing, multiple computer capabilities, ANSI standard conformance...and VT100 compatibility is something else. Only from Human Designed Systems.

A good news/great news story from Human Designed Systems.

First the good news. The *concept* AVT display terminal gives you everything you need in an 80/132-column ANSI/VT100-compatible display terminal. And at a very competitive price.

Now the great news. The *concept* AVT display terminal provides an exciting, new set of capabilities that lets you do much more. Without changing the price.

$1095*

It starts with ANSI standard conformance, DEC software compatibility, and 80/132-column capability, and extends that even further by offering eight pages of display memory to relieve the interactive user of the need to generate unnecessary hardcopy printouts and to provide the application developer with a powerful tool for applications requiring multiple formats and storage of large volumes of text; by enabling users to permanently configure a terminal for their needs or applications; by providing functionality designed to improve the effectiveness of slow-speed applications; by enabling users to create true windows within display memory; by providing programmable function keys which transmit data and/or execute terminal commands; by providing up to three additional communications ports for connection to other peripherals and computers; by providing flexible user networking functionality for use in a wide range of different applications, including multiple computer connections; and by doing much more.

VT100 compatibility and ANSI standard conformance. Add it to the *concept* display terminal's 132-column performance, in ASCII or APL/ASCII models, with multiple computer capabilities, windowing, programmable function keys, multiple pages of memory, and much more, and you can see why Human Designed Systems has given terminals a new meaning...and that means true economy.

*Quantity 50. DEC and VT are trademarks of Digital Equipment Corporation.

human designed systems, inc.

3440 Market Street, Philadelphia, PA 19104
215-382-5000 Circle 202 on Inquiry card.

Human Designed Systems. We're redefining terminal performance.

Boston — (617) 329-3510; Chicago — (312) 825-2960; Dallas — (214) 696-8031; Delaware — Infocon: (302) 239-2942; Hawaii — Gray Associates: (808) 261-3751; Los Angeles — (213) 410-9454; Northern New Jersey — Infocon: (201) 624-1372; New York City Area — Infocon: (212) 689-8833; New York State — Naco Electronics: Rochester: (716) 223-4490, Syracuse: (315) 699-2651; San Francisco — (415) 692-4184; Washington, DC — International Systems Marketing: (301) 279-5775; Australia — I. O. Peripherles Pty. Limited: (02) 427 3555; Belgium — BELCOMP: 091/25 22 88; Canada — CAIL Systems: Toronto: (416) 362-1063; Denmark — ADCOM Data Aps: 1-19 44 66; Finland — Modulsystem OY: 0-6926511; France — Walton: (1) 226.06.90; Singapore — DTS Singapore: (65) 33-88-566; Sweden — Alinovo Data AB: 08-37 25 15; Switzerland — Mitek ag: 02/461 22 52; United Kingdom — Shandell Systems Ltd.: 02407-2027; West Germany — COMKD Computersystemges, mbH: 0221-48 30 51.
DISTRIBUTORSHIP INQUIRIES INVITED.

www.americanradiohistory.com

the thin metal film; this process is called ablation. In other processes being developed by 3M Company and France's Thomson-CSF, bubbles or blisters are raised by lasers. In still others, a phase change in the index of reflectivity is created without either ablating or blistering the thin metal film's surface.

Regardless of which technique is used, the pattern of holes, bubbles, or marks in the medium surface causes the read-back laser beam to be deflected at specific intervals, thus reproducing the original binary bit pattern. The size or position of the hole, blister, or mark relative to its neighbors may also be used to encode binary information onto the medium.

Tellurium-Based Media

To date, over 70 percent of the research into materials for optical-memory media has concentrated on a rare nonmetallic element, tellurium, which resembles sulfur and selenium in chemical properties. Although tellurium is sometimes found native in white crystals, it is usually found alloyed with other elements. The chief reason for this is that pure tellurium oxidizes rapidly when in contact with moisture. Tellurium is somewhat toxic (and gives workers in contact with it a bad case of body odor). Researchers, nevertheless, have concentrated on finding ways to prevent tellurium from oxidizing, such as by overcoating it, encapsulating it, building bilayered, trilayered, or Philips' Air-Sandwich structures, or alloying it with more stable elements such as selenium or arsenic.

Tellurium has been favored primarily because of its low melting point (450°C) and high sensitivity. However, much optical-media research in recent years has concentrated on finding viable alternatives to tellurium. Among these are silver halide and gold/platinum alloys. Tellurium has its champions as well as detractors; most systems to be commercially tested this year will use tellurium or one of these alternatives. Firms that already have or are planning to show tellurium-based optical-media products in 1983 include Control Data Corporation (CDC), Fujitsu, Hitachi, Matsushita, Omex, Philips, RCA, Storage Technology, Toshiba, and Xerox.

Japanese Optical-Memory Media

Japanese-developed media lean heavily toward tellurium alloys, including tellurium suboxide, tellurium/carbon alloy, and tellurium/copper alloy. Toshiba and 3M have been showing Toshiba's DF-2100 (tellurium/carbon alloy medium) document-storage system at computer and micrographics shows for over a year. Toshiba claims a 40-year archival life for its medium.

Matsushita, under the Panasonic label, has been showing prototype DRAW (direct-read-after-write) still-frame analog video recorders using diode lasers; they are able to store 15,000 images on one side of an 8-inch tellurium suboxide disk. Digital DRAW recorders are expected from Matsushita shortly, and Fujitsu is expected to use a tellurium/copper alloy in its high-end optical recording medium.

Other Media

Gold/platinum alloy optical media are being developed by the French firm Thomson-CSF in cooperation with the Optimem project in Xerox's Shugart Division. Silver halide is the metal used in the only optical medium now commercially available, Drexler Technology Corporation's Drexon. Kodak is quite far along in development of a polymer/dye binder optical medium that uses no thin metal film.

Desired Characteristics

Regardless of the materials used, optical media should have the following general characteristics: long-term archival storage ability, high absorptivity at the recording wavelength, low writing energy, low manufacturing cost, high signal-to-noise ratio, good hole- (or bubble- or mark-) forming characteristics, low thermal

ALF COPY SERVICE

FAST • RELIABLE • LOW COST

If you produce software, ALF's disk copying service is the quick, convenient answer to your disk duplication needs. Most orders are shipped in less than a week. Every disk we copy is verified bit by bit and guaranteed 100% flawless. Standard formats include Apple II (including nibble-copy proof and double-boot), Apple III, Atari, IBM, Osborne, and TRS-80.

Our "no frills" pricing means you don't have to buy extras you don't need — set-up charges are $10 to $25 per disk to be copied, copying charges are 30¢ to 40¢ per side (minimum: 50 copies).

Of course, we have the frills too — including custom printing and packaging. Call us today for complete details.

We also sell blank disks in bulk pack boxes of 100. All are 5¼", single sided, double density (except Nashua is single density), unlabeled, with hub ring. Add $7 per hundred for sleeves, $2.50 per hundred for shipping.

3M	$165/100
CDC	$165/100
MEMOREX	$165/100
NASHUA	$155/100
VERBATIM	$185/100

ALF (303) 234-0871 1315F NELSON ST. DENVER, CO 80215

Circle 369 on inquiry card. ⟶

www.americanradiohistory.com

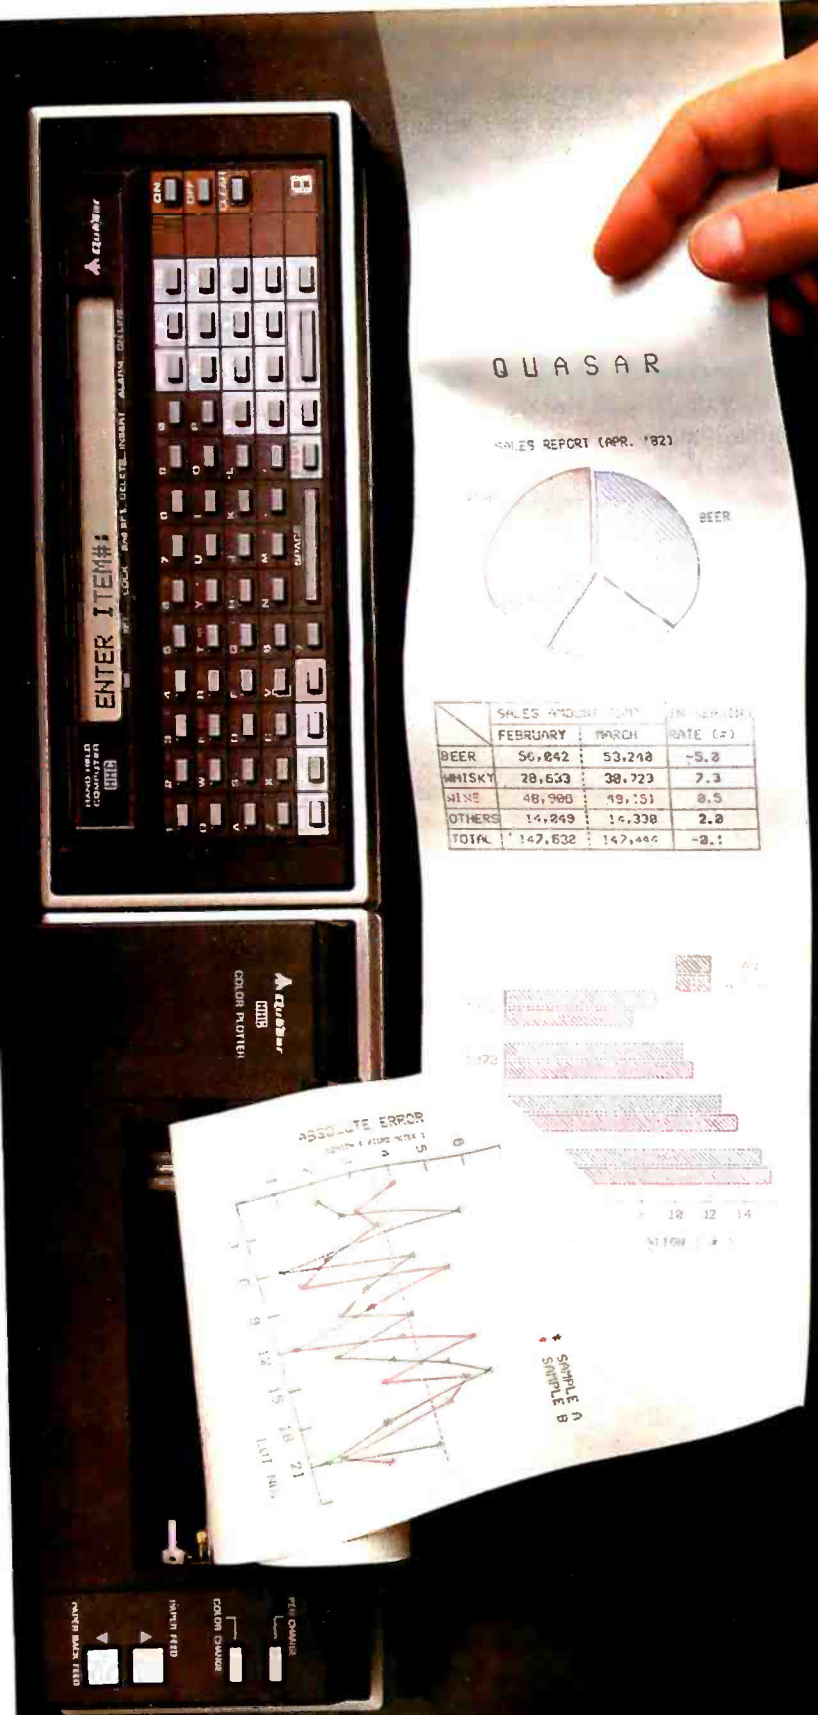

One picture is worth a thousand numbers.

Introducing the new wide-tape Quasar® 4-Color Plotter, driven by the portable with the speed and power of a desktop computer.

Coupled with the sophisticated Quasar Hand-Held Computer, this advanced, 80-character plotter turns dry statistics into dramatic graphics anytime, anywhere. Makes analysis easier, presentations more exciting.

The Quasar HHC is actually a desktop computer you can take with you. Its heart is a fast, powerful 6502 microprocessor, with powerful programming languages—Microsoft BASIC, SnapBASIC and SnapFORTH, and high-memory capacity of up to 8KB RAM and 16KB ROM internal, expandable with external Memory Modules and ROM's or EPROM's in capsules. Operates on rechargeable NiCad batteries and retains data with power off.

The Quasar mainframe has a complete range of intelligent peripherals including a new 40-Character Printer, Telephone Modem/Cassette Interface, RS232 Interface, Color TV Adaptor, I/O Adaptor that works with up to 6 peripherals.

That means the Quasar HHC system can be your personal computer and database,or portable terminal that interacts with a large, central computer, or supplementary system to host computers for data retrieval, collection and transfer.

An expanding array of snap-in software includes modelling programs for "what if" alternatives. programs for time-billing professionals, financial calculations, and many others for scientific, engineering, marketing and business applications.

For a complete information kit, write Quasar HHC Dept., or use Reader Service Card.

Quasar

Portable Computer Systems

For HHC system tailored to your specific application contact System House/OEM:

American Medical Instruments
Albany, CA
415-525-1113

Field Data
Simi Valley, CA
805-522-9629

Computer Applications
Aurora, CO
303-696-1864

Pentagon Industries, Inc.
Chicago, IL
312-867-9200

Impact Technologies Group, Inc.
Salisbury, NC
704-637-6183

System Exposure
Dunedin, FL
813-736-5154

Systems 7, Inc.
Houston, TX
713-468-4394

Agent Computer Services, Inc.
Columbia City, IN
219-422-6552

Pictorial Publishers, Inc.
Indianapolis, IN
317-872-7220

Quasar HHC Distributor:
InterNet
San Francisco, CA
800-227-4258
415-781-0175

QUASAR COMPANY, Division of Matsushita Electric Corporation of America, 9401 West Grand Avenue, Franklin Park, IL 60131 (312) 451-1200

www.americanradiohistory.com

conductivity, and, preferably, a manufacturing process free of toxic substances.

Erasable Reusable Media

Originally, optical media's lack of erasability was considered by many to be a shortcoming. However, more recent thought has recognized that for most applications it is not desirable that optical media be erasable. This is because optical media will occupy a different place in the memory hierarchy than most magnetic media and will be preferred for archival and massive data-collection jobs where there is more need to preserve the information than to erase and update it.

Because optical media typically contain up to 100 times the storage capacity of the same size magnetic media, they provide storage at a small fraction of the cost per user-byte for magnetic media. Optical media in systems to be shown this year range in capacity from 1¼ to 4 gigabytes (a gigabyte is 1024 megabytes). Being able to erase and reuse an optical disk is not an economic consideration as it is with more expensive magnetic disks. Far more important than erasability is the convenience of removing optical disks and their much longer life in an archive; one need not rerecord optical disks every two to three years.

Erasable vs. Nonerasable Media

With the luxury of so much storage space available, many computer scientists feel that rather than erase data on optical disks, it is preferable merely to put a disabling code in each obsolete data sector with a pointer to updated information. Thus, if an audit trail must be done to find out how an answer was constructed, the original data will not have been obliterated.

Nevertheless, erasability would definitely be desirable in some applications, and research organizations around the world are increasing their efforts to identify the best techniques for achieving erasable and reusable optical media. Laboratory experiments have offered encouraging results, and commercial availability can be expected around 1986, at which time optical media can be expected to seriously affect magnetic media sales. Until then, optical media will complement rather than compete with magnetic media. The storage media most likely to be hurt by optical media in the near term are reel-to-reel magnetic tape and microfiche for archival data and document storage.

A variety of approaches to erasability are being tested in laboratories. Dr. Alan Bell, now with IBM's Research Laboratories in San Jose, California, described the state-of-the-art thinking on the subject in the March/April 1982 issue of *Optical Memory Newsletter*, and he concluded that recent developments in the U.S. and Japan in magneto-optic materials using encapsulated trilayer structures now look more promising for erasability than they did in the 1970s when phase changes were caused by using amorphous semiconductors that recorded at one

YOU SPENT $4,000 ON A PERSONAL COMPUTER. FOR ANOTHER $12.50, YOU CAN GET YOUR MONEY'S WORTH.

A lot of business people aren't realizing the full potential of their personal computers. Because they haven't realized how much more their computers are capable of.

LIST can help.

LIST is the first publication that puts software first.

It contains articles by some of the most respected names in the computer field. Written to help you get the most out of your personal computer.

What's more, *LIST* contains the *LIST Software Locator,*™ a comprehensive guide to over 3,000 personal computer programs, conveniently indexed by application, industry, operating system and hardware.

LIST is sold at leading computer stores and bookstores. Or, you can phone our toll-free number, and receive a copy by mail. The price, exclusive of postage and handling, is $12.50, (VISA and MasterCard accepted).

Which is a pretty small price to pay for something that can maximize a much larger investment.

LIST *is published by Redgate Publishing Company, an affiliate of E.F. Hutton.*

LIST™

The Software Reso rce Book For Personal Computer Users

1 800 821-7700

Ext. 1110

© 1983 Redgate Publishing Company. Vero Beach. FL. All rights reserved.

Circle 377 on inquiry card.

www.americanradiohistory.com

The MultiMode Printer with The Magnificent Fonts

MultiMode Printer Offers Flexibility

. . . At a Sensible Price—$1,995 (Qty. 1)

"Flexibility" means instantaneous call up of any of this trend-setting machine's many features whether for *word processing, data processing, graphics* or *forms generation.* Using either of the two built in interfaces, an external keyboard or downloading from your computer, you can program the Qantex Model 7030 to do more.

The "Beautiful" Font



Compare the "Beauty" of our printed letters for the word processing fonts which include Cubic, Trend, Spokesman, Courier, Italics, Script, OCR-A, APL, Scientific plus *downloaded* fonts from your computer. Draft copy modes include 8 resident fonts — U.S., U.K., German, French, Spanish, Swedish, Finnish, Norwegian and Danish.

Other features include high resolution graphics — 144 x 144, single pass and double pass word processing, and 180 cps data processing modes and user defined formats.

Operator initiated, the MultiMode printer provides a complete printed status report of operating parameters and diagnostics.

For more information, or a demo, call us about the new Qantex Model 7030 MultiMode Printer.

Qantex* Division of North Atlantic
60 Plant Avenue, Hauppauge, NY 11788
(516) 582-6060 (800) 645-5292

*Registered Trademark of North Atlantic Industries

Circle 364 on Inquiry card.

www.americanradiohistory.com

temperature and erased at another.

Robert McFarlane of North American Philips Laboratories predicts that reversible media are three to five years away; magneto-optics will probably be developed first, especially by Matsushita and Hitachi in Japan, and phase-change erasable techniques will be less likely. Philips has published very little about its reversible-media research.

This, however, is not the unanimous view; Edward LaBudde, general manager of Burroughs' optical recording program, sees amorphous-to-crystalline phase transition as the most promising technique. Despite heavy work in magneto-optics by the Japanese as well as Xerox and IBM, LaBudde doubts that the contrast and signal-to-noise ratio will be sufficient for most applications. Burroughs is not concentrating much effort on reversible media now. Compared with the problems in perfecting erasable media, developing nonerasable media seems trivial.

Error Rates

Corrected BERs (bit error rates) satisfactory to both the mainframe computer and micrographics industries seem to have been attained within the past year. However, it is necessary to link discussion of the BER with each application, taking into account the seriousness of an error versus the cost of correcting it. Although magnetic media for mainframe data applications have corrected (or "hard") BERs of 1 in 10^{13}, not all magnetic media require it; floppy disks typically have a corrected BER of 1 in 10^{9}. For document-storage applications, where images rather than digital data are recorded, a corrected BER of 1 in 10^{6} is more than adequate. An error in that range will show up as a tiny black speck on a high-resolution image.

Typically the "raw" (uncorrected) BER of optical media is 1 in 10^{6}. New techniques in EDAC (error detection and correction) codes bring the uncorrected user BER up to 1 in 10^{13} but require from 10 to 50 percent of the disk's total capacity to do so. The most dramatic breakthrough in EDAC is from Storage Technology Corporation (STC), which claims corrected BER of 1 in 10^{13} with overhead of only 20 to 30 percent of the disk's capacity while leaving users with a 4-gigabyte capacity on one side of a 14-inch tellurium-based multilayer disk.

Data Transfer Rates

Burroughs and STC are developing 14-inch disks for high-end, sophisticated mainframe applications, but not all optical memory systems will be used with mainframes. Most optical-memory drives and media will be sought by the mid-range and low-end of the market for use with minicomputers and microcomputers for both digital data and office automation applications. The capacity of the first-generation disks will typically be 1 to 2 gigabytes; the disks and drives will be much less ex-

Circle 313 on inquiry card.

AREN'T YOU GLAD YOU WAITED!

$1795.00

DOUBLE DENSITY!

9" SCREEN!

☐ NOW AVAILABLE EVERYWHERE!

☐ SOFTWARE INCLUDED!
PERFECT FILER
PERFECT SPELLER
PERFECT WRITER
PERFECT CALC
S-BASIC
CP/M 2.2
PROFITPLAN

☐ FEATURES
CPU: Z-80
RAM: 64K
READS XEROX 820

☐ DISK DRIVES
TWO 5¼" FLOPPY
DISC DRIVES 200 K
CHARACTERS
STORAGE EACH

☐ DEALER INQUIRY INVITED

Personal Portable Computer

KAYPRO

DIVISION OF Non-Linear Systems, Inc. 533 Stevens Avenue, Solana Beach, CA 92075 U.S.A. (619) 755-1134

www.americanradiohistory.com

IF YOUR DATA'S WORTH REMEMBERING, IT'S WORTH PROTECTING.

POWERMAKER MICRO UPS®

A split-second blackout or a sudden voltage sag can shut down your small business computer, completely wiping out critical data. Inventories, payrolls, receivables — whatever is in the memory may be lost instantly.

Although this type of data is just as important to a small business as it is to a large corporation, blackout protection has always been far too costly for small business applications. But now there is the Powermaker Micro UPS, an inexpensive standby power source specifically designed for small business computers.

This new rechargeable power system provides up to 35 minutes of steady sine-wave power, enabling even the most sensitive small computers to ride through blackouts and voltage sags completely unaffected.

Why sine-wave power? Because square-wave power impairs the performance of many printers, viewing screens and timing circuits. Powermaker produces a sine wave that exactly matches the wave shape of commercial power, ensuring compatibility with any computer system.

In addition to providing highly reliable blackout and brownout protection, Powermaker also protects against electrical noise, one of the major causes of computer errors and system malfunction. Powermaker is portable, completely automatic, maintenance free and plugs into any standard 120V outlet.

No matter how small your computer, your data is worth remembering. Protect it with an affordable Powermaker Micro UPS.

For complete information about the new Topaz Powermaker Micro UPS, please fill out this coupon or call us.

TOPAZ; 9192 TOPAZ WAY
SAN DIEGO, CA 92123-1165
PHONE: (619) 279-0831
TWX: (910) 335-1526

☐ Please send me complete information about Powermaker®
☐ Please have a representative call me.

Name_____
Title_____
Company_____
Address_____
City_____ State_____
Zip_____ Phone_____

11

TOPAZ
SOLUTIONS TO POWER PROBLEMS™

Circle 495 on inquiry card.

www.americanradiohistory.com

We Scout Out The Best Buys.

THE PURCHASING AGENT is your computer buying company. We negotiate the purchase of millions of dollars of hardware ***and software*** at the best prices each year. Our buying power gives you more hardware and software for your money. Our fee is 25% of what we save you off list price. By participating in the savings, we share a common goal — to save you money.

Call us for your price on any product not listed. All prices shown include our fee.

COMPUTERS

Alpha Micro 1000 VW	**$5,960**
Alpha Micro 1030	12,047
Alpha Micro 1051	17,634
Alspa AC1-2/SS	2,320
Altos 8000-10	**5,850**
Altos 8600-10	7,586
Altos Series 5-15D	**2,100**
Altos Series 5-5D	3,999
Apple Computers	CALL
California Computer Systems 300-1A	4,414
Columbia Data	**CALL**
Compupro Godbout™	
Sys 816/A*	4,200
Sys 816/B*	5,360
Sys 816/C*	6,880
Ram 21, 128K	807
Disk II H.D. Contr.	586
Morrow 20 meg. H.D.	2,990
*Assembled and tested	
Cromemco System 1	2,946
Cromemco System 2	3,400
Cromemco 68000 System 1	4,395
Dynabyte	26% OFF
Eagle II	2,350
Eagle 1600	**5,420**
IBM Personal comp.	**CALL**
Amdek Color III term.	429
AST	33% OFF
Baby Blue	530
Davong 5 meg. H.D.	1,569
Diablo 630 API	**1,825**
NEC 3550	**1,920**
Seattle boards & all IBM peripherals	CALL
Micromation	CALL
Molecular	CALL
Morrow Micro Decisions	CALL
NEC 16 bit APC system	**CALL**
NEC 8000 64K PC sys.	2,266
NorthStar Advantage	**2,669**
NorthStar Adv. H.D. 5	4,395
Onyx 5001 MU-6	7,350
Onyx 8000 MU-10	7,900
Sage	3,200
Sanyo 1000	1,540
Seattle System 2	3,251
Televideo TS-802	**2,600**
Televideo TS-802H	4,450
Televideo TS-806	5,200
Vector 2600	3,895
Vector 3005	5,495
Vector 4	CALL
Victor	**CALL**
Zenith 100	**22% OFF**

PRINTERS

Brother, parallel, daisy	**910**
C. Itoh, F-10, daisy	1,350
Daisywriter 2000	**1,099**
Diablo 620, dsy. 25 cps	990
Diablo 630, daisy	2,050
IDS Prism 132 all options	**1,430**
NEC 3510	CALL
NEC 7710 R/O	2,325
NEC/Sellum 1, 16K, trac.	**2,595**
Qume 9/45 full panel	1,799
Qume 9/55 full panel	2,180
Qume 11/35	CALL
Smith Corona TP-1, daisy	681
Tally	CALL
Texas Instr. TI 810	**1,240**

OTHER PERIPHERALS

Amdek Color II term	694
Ventel 212 + modem	765
Corvus 10 meg. H.D.	**2,995**
Houston Instr. DMP-29	1,549
Houston Instr. DMP-40	**775**
Morrow 20 meg. H.D.	**3,650**

SOFTWARE

Call for prices on all your software needs.

Mastercard, VISA at 3% handling fee. Prices subject to change without notice. Minimum fee $150.

EXPORT SERVICES AVAILABLE.

We are agents for overseas computer dealers and distributors.
INTERNATIONAL TELEX 470851

On The Frontier of High Technology and Value.

THE PURCHASING AGENT

1635 School Street
Moraga, CA 94556

Call Toll Free
800-227-2288
In California
(415) 376-9020

pensive than the high-capacity, high-performance systems designed for mainframe environments. Burroughs' medium will handle transfer rates of 12 million bps (bits per second); STC's will handle 24 million bps. The medium being jointly developed by Control Data and Philips for mid-range office automation jobs handles 5 million bps.

Optical Media Costs

What will optical media cost? Most manufacturers predict that within a year 1- to 2-gigabyte disks will sell to end users for about $150; 2- to 4-gigabyte disks will cost $200 to $300 initially. STC foresees a cost of $100 to $150 for its 4-gigabyte disk by 1985. By the end of the decade, when yields should make it possible to build millions of disks annually, most optical-media developers see user costs dropping to $15 for a nonerasable disk.

Assuming that high yields have been achieved, STC spokesmen feel that by 1990 the cost of putting down a bit on optical media will have dropped to the equivalent of putting a bit down on paper, or around 15 cents per megabyte.

A market-research study offered for sale by Rothchild Consultants predicts that in 1986 erasable media would cost a premium of 50 percent over nonerasable disks, dropping to a 25 percent premium by 1990, when they should capture 40 percent of the optical-disk market.

Ease of Handling

Ease of handling is one of the strongest arguments in favor of optical disks over magnetic media. Although most optical-media developers now favor encapsulating their disks in protective overcoats or cartridges, all optical media are removable from the drive, unlike most high-capacity magnetic disks. Furthermore, the optical disks are much less susceptible to being damaged by heat or humidity, and neither fingerprints nor magnetic fields can affect optical disks.

Their ease of handling makes it possible to develop automatic disk-changing mechanisms (similar to jukeboxes) for optical disks. The

Circle 363 on inquiry card.
Circle 461 on inquiry card. →
www.americanradiohistory.com

INCREASE YOUR PRODUCTIVITY WITH OUR WORD PROCESSING KEYBOARD FOR THE IBM PC.

We improved the keyboard and added some features to make your keyboard more "finger friendly".

- Left hand SHIFT key properly placed.
- Lighted indicators on:
  CAPS LOCK key, NUMERAL LOCK key
- RETURN key in standard typewriter position.
- ENTER key next to ten key pad for adding machine like data entry.
- Sculptured key tops with "finger homing" position on:
  F, J, and 5 key of the ten key pad.

From the design of the case to colors of the keys, to the plug on the cable, the keyboard is 100% IBM compatible. This keyboard is the most productive way you will ever spend $199.

30 DAY SATISFACTION GUARANTEE
We are so sure you will like this keyboard we will give you 30 days of use to be sure. If you are not completely satisfied return it for a full refund including freight.

TO ORDER BY MAIL SEND:
—quantity desired @ $199 each.
—your name and shipping address
—daytime phone number
—add $5 for UPS 2 day air service
—California residents add $11.94 sales tax.
—Company check or credit card and expiry date.
(Personal checks take 18 days to clear)

TO ORDER BY PHONE:
In California (805) 482-9829
Outside California Toll Free (800) 821-4479
Dealer inquiries invited

QUBIE' DISTRIBUTING

4809 Calle Alto
Camarillo, CA 93010

European Inquiries:
129 Magdalene Rd.
London, SW18
870-8899

www.americanradiohistory.com

Make the Qume Connection.™

The Qume SPRINT 11 PLUS™ is the new standard of quality for professional, letter-perfect daisywheel printing. And for just $1776, you can have it for your personal or desktop computer. It comes complete with a Qume Connection interface module to fit popular computers from IBM, Radio Shack, Commodore, Xerox, Hewlett Packard, North Star and many others. Its 96-character daisywheel delivers letter-quality text at a steady 40 cps. And with an average of 5,500 trouble-free hours (3 years typical use) between maintenance, the SPRINT 11 PLUS is unmatched in reliability. Qume quality is the choice of sophisticated, professional users. At $1776, there's no reason for you to settle for anything less. Make the Qume Connection by calling one of our authorized distributors. Or write Qume, 2350 Qume Drive, San Jose, California 95131.

Our new SPRINT 11 PLUS™ fits every computer. $1776.

Qume®
A Subsidiary of ITT

www.americanradiohistory.com

Abacus Data Services
(416) 677-9555 Ontario
Anacomp
(213) 516-7480 CA
(206) 641-4990 WA
(206) 881-1113 WA
(509) 624-1308 WA
(800) 426-6244 Outside WA
Anthem Systems
(415) 342-9182 CA
Audio Visual Services
(713) 659-1111 TX
(800) 392-7770 TX Only
Bohlig and Associates
(612) 922-7011 MN
Butler Associates
(203) 653-7158 CT
(617) 964-5270 MA
Byte Industries
(800) 972-5948 CA Only
(800) 227-2070 Outside CA
C & G Distributors, Inc.
(513) 435-4340 OH
(800) 245-1084 Outside OH
(412) 366-5056 PA
(800) 245-1084 Outside PA
D. J. Carlyle Corp.
(213) 277-4562 CA
(714) 640-0355 CA
(415) 254-9550 CA
(808) 531-5136 HI
(312) 975-1500 IL
(201) 780-0802 NJ
(214) 458-0588 TX
(713) 530-4980 TX
Computer Mart of N.J.
(201) 283-0600 NJ
Computermax Corp.
(505) 883-0048 AZ
(602) 997-8900 AZ
(303) 773-1169 CA
(904) 878-4121 FL
(404) 458-6500 GA
(704) 542-0091 NC
(512) 654-4711 TX
Datamex Ltd.
(613) 224-1391 Ontario
(416) 781-9135 Ontario
(514) 481-1116 Quebec
(604) 684-8625 Vancouver
Data Systems Marketing
(602) 833-0061 AZ
(916) 891-8358 CA
(714) 540-2312 CA
(209) 237-8577 CA
(213) 344-7097 CA
(213) 641-2050 CA
(415) 941-0240 CA
(213) 796-2562 CA
(213) 796-2631 CA
(714) 560-9222 CA
(213) 344-7097 CA
(303) 371-4140 CA
(303) 694-1710 CA
(313) 254-2830 MI
(406) 586-1511 MT
(603) 673-0765 NH
(505) 294-1531 NM
(503) 641-2469 OR
(412) 486-2676 PA
(214) 960-1604 TX
(713) 789-0803 TX
(801) 292-6666 UT
(206) 575-8123 WA
Datatech Systems, Ltd.
(403) 483-3947 Alberta
(416) 255-9351 Ontario
(604) 765-7781 Victoria
Data Technology Industries
(415) 638-1206 CA
(910) 366-2072 (TWX)
Data Terminal Mart
(403) 270-3737 Alberta
(403) 420-1755 Alberta
(604) 872-8482 B.C.
(902) 469-3782 Nova Scotia
(416) 495-2001 Ontario
(416) 677-0184 Ontario
(613) 729-5196 Ontario
(416) 245-4780 Ontario
(514) 288-1555 Quebec
Equipment Resources
(404) 995-0313 GA
(901) 794-4635 TN
General Electric
(205) 479-6547 AL
(602) 278-8515 AZ
(714) 231-0309 CA
(415) 436-9260 CA
(203) 628-9638 CT
(202) 737-6211 DC
(305) 921-0169 FL
(904) 751-0815 FL
(305) 904-7723 FL
(404) 452-4913 GA
(404) 452-4919 GA
(219) 933-4500 IL
(217) 424-8495 IL
(312) 760-2994 IL
(812) 473-6161 IN
(317) 241-9330 IN
(219) 933-4500 IN
(319) 285-7501 IA
(502) 452-3311 KY
(301) 332-4710 MD
(617) 938-1920 MA
(800) 343-4411 MA
(612) 522-4396 MN
(816) 231-6362 MO
(314) 993-0537 MO
(201) 227-7900 NJ
(609) 488-0244 NJ
(716) 876-1200 NY
(201) 227-7900 NY
(518) 385-4888 NY
(704) 525-3011 NC
(513) 874-8512 OH
(216) 441-6111 OH
(503) 221-5095 OR
(901) 527-3709 TN
(214) 243-1106 TX
(713) 672-3575 TX
(801) 973-2253 UT
Gentry and Associates
(205) 534-9771 AL
(305) 791-8405 FL
(305) 859-7450 FL
(813) 886-0720 FL
(404) 998-2829 GA
(504) 367-3975 LA
(919) 227-3639 NC
(803) 772-6876 SC
(901) 358-8629 TN
(615) 977-0282 TN
Inland Associates
(913) 764-7977 KS
InterACT Computer Systems
(305) 331-7117 FL
(404) 953-8213 GA
(704) 254-1949 NC
(704) 552-7502 NC
(919) 275-3305 NC
(919) 876-6379 NC
Manchester Electronics
(800) 342-1382 CT
MicroAmerica
(800) 421-1485 CA
(800) 262-4212 CA
(617) 431-7660 MA Only
(800) 343-4411 Outside MA
(800) 527-3261 Outside TX
(800) 442-5847 TX Only
Micro Computers of New Orleans
(504) 885-5883 LA
Nat'l. Computer Syndicate
(312) 459-6400 IL
Pac. Mountain States Corp.
(213) 989-6113 CA
PAR Associates
(602) 243-4267 AZ
(303) 371-4140 CA
(801) 292-8145 UT
Pioneer Electronics
(205) 837-9300 AL
(305) 859-3600 FL
(305) 771-7520 FL
(404) 448-1711 GA
(301) 948-0710 MD
(919) 273-4441 NC
(215) 674-4000 PA
Pioneer Std. Electronics
(312) 437-9680 IL
(317) 849-7300 IN
(313) 525-1800 MI
(612) 935-5444 MN
(216) 587-3600 OH
(513) 236-9900 OH
(412) 782-2300 PA
(512) 835-4000 TX
(214) 386-7300 TX
(713) 988-5555 TX
Schweber
(205) 882-2200 AL
(213) 999-4702 CA
(213) 537-4321 CA
(916) 929-9732 CA
(408) 496-0200 CA
(203) 792-3500 CT
(305) 331-7117 FL
(305) 927-0511 FL
(404) 449-9170 GA
(312) 364-3750 IL
(319) 373-1417 IA
(301) 840-5900 MD
(617) 275-5100 MA
(313) 525-8100 MI
(612) 941-5280 MN
(201) 227-7880 NJ
(716) 424-2222 NY
(516) 334-7474 NY
(216) 464-2970 OH
(513) 439-1800 OH
(918) 622-8000 OK
(215) 441-0600 PA
(412) 782-1600 PA
(512) 458-8253 TX
(214) 661-5010 TX
(713) 784-3600 TX
(414) 784-9020 WI
Tek Aids Industries Inc.
(312) 870-7400 IL
(512) 835-9518 TX
Terminal Rentals, Inc.
(602) 258-4466 AZ
(213) 637-3413 CA
(714) 235-9268 CA
(415) 956-4821 CA
(408) 292-9915 CA
(714) 832-2414 CA
Terminals Unlimited
(800) 336-0423
(800) 572-0164 VA
(703) 237-8666 VA
Unico
(512) 451-0251 TX
Victor Electronics
(617) 481-4010 MA
Western N.Y. Computer
(716) 381-4120 NY
2M Corporation
(201) 625-8100 NJ

Qume
A Subsidiary of ITT

Circle 370 on inquiry card.

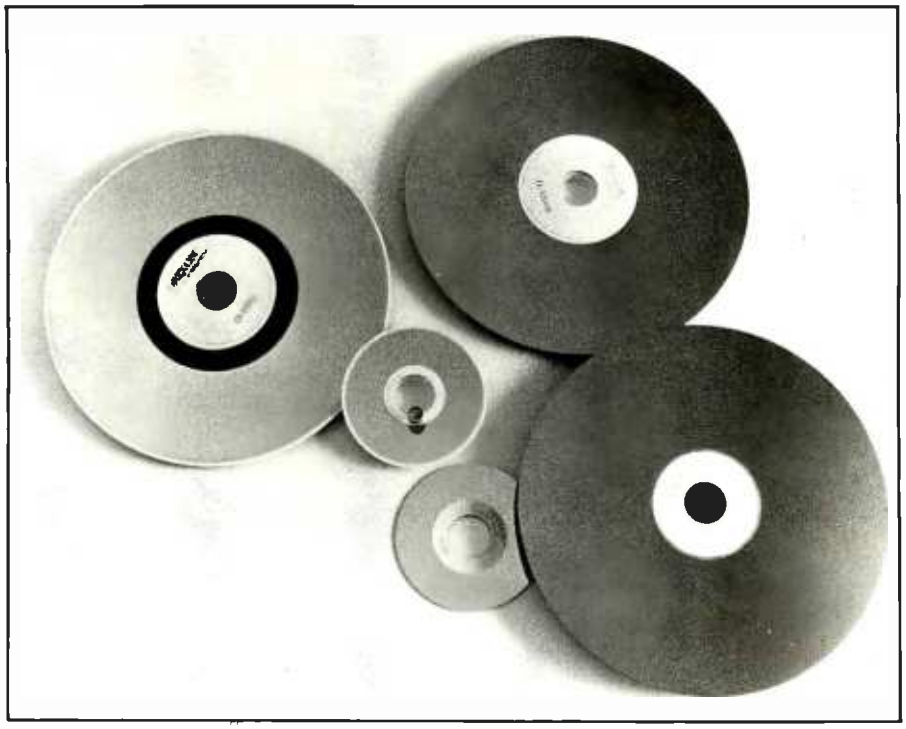

Photo 1: *The Drexon family of optical disks. Disks are available in 12-inch and 4.7-inch sizes, with or without the clear protective cover plate. Near the center of one of the smaller disks is a semiconductor-diode laser used for recording and reading optical disks. The larger disks have a capacity of 1250 megabytes per side, while the 4.7-inch disks can store 200 megabytes per side. Disks are recorded with 0.8-micron to 1.0-micron holes burned into their reflective surface. (Photo by Victor Budnik.)*

most ambitious design is one STC has for a 500-disk IBM-compatible device which, with 4-gigabyte capacity per disk, gives users online access in seconds to 2 terabytes (2 million megabytes)!

Drexler's Drexon Medium

The first company to offer optical recording media on a commercial basis is Drexler Technology Corporation of Mountain View, California. One of the world's largest suppliers of photomasks and chemicals used in the fabrication of semiconductors, Drexler has patented a technique whereby spherical (reflective) and filamentary (absorptive) particles of silver halide are embedded in a colloidal polymer matrix ("gelatin") to form the recording medium.

Tradenamed Drexon II, the medium is a double-layer configuration of a crust containing silver halide particles and an insulating underlayer devoid of the metal. A diode laser heats the medium so that the silver halide particles absorb the laser energy. As the temperature rises to about 200°C, the polymer film melts and creates spots of low reflectivity in a field of high reflectivity.

An increasing variety of disk sizes is being offered. Photo 1 shows 12-inch (30 cm) and 4.7-inch (12 cm) Drexon disks with and without clear protective overcoats. Also shown is a semiconductor-diode laser used for writing and reading data. Using 0.8- to 1.0-micron-wide holes, 12-inch Drexon disks hold 1.25 gigabytes per side, whereas 4.7-inch disks contain 200 megabytes per side. Although holes as small as 0.4 micron have been recorded, Drexler recommends 0.7-micron pits.

Drexler has avoided two problems associated with using silver halide for optical DRAW media: processing and graininess. Usually graininess results in intrinsic noise because the particle size prevents obtaining the sharp-edged pit definition needed in high-density optical recording.

Furthermore, because the laser melts the gelatin rather than the silver, lower-powered compact diode lasers can be used, rather than the

www.americanradiohistory.com

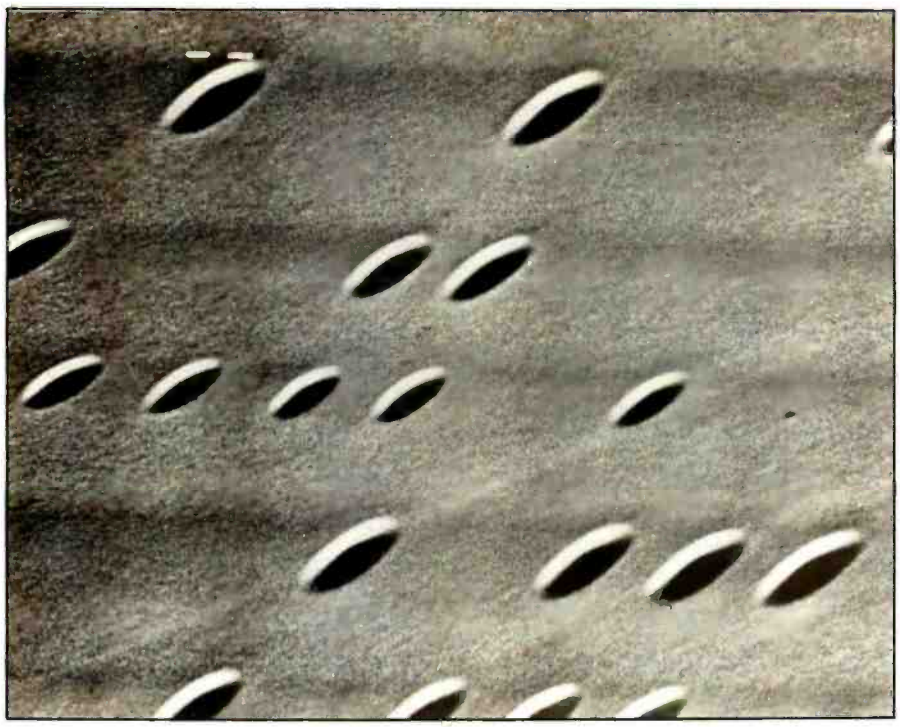

Photo 2: *Recorded surface of Drexon II material as photographed by a scanning electron microscope at 2500-power magnification. The holes vary in size between 3 and 5 microns and were recorded with a 3-mW laser pulsed for a duration of 75, 150, and 300 microseconds. Holes recorded in Drexon II are well defined and have lipless rims because the material shrinks when heated. These characteristics improve the signal-to-noise ratio and permit data to be encoded by varying hole lengths and spacings.*

Photo 3: *A common credit card could use the Drexon laser-recorded stripe. The stripe on the back of this card has a capacity of 1.6 million bits and is not susceptible to erasure by stray magnetic fields. A card this size completely covered on both sides could store 40 million bits. (Photo by Victor Budnik.)*

bulkier gas lasers. When production of 12-inch disks reaches 100,000 annually, Drexler expects the cost to drop to about $40 each.

On Drexon II disks the laser records a unit of data as a well-defined hole with a lipless rim, which Drexler says improves the signal-to-noise ratio and permits data encoding by varying the hole lengths and spacings between holes. The laser shrinks the gelatin in the medium, leaving the lipless rims, rather than throwing up craters around the pit as happens in other ablative techniques. The scanning electron microscope photo at 2500-power magnification (photo 2) shows 3-micron and 5-micron holes recorded at 3 milliwatts (mW) of laser power for a duration of 75, 150, and 300 microseconds.

In addition to disks, Drexler is now offering its medium in reel-to-reel optical tape, cassettes, and cards. The Drexon Laser Card has attracted considerable attention for its ability to deliver high-density storage in a conveniently small and inexpensive package the size of a credit card. Photo 3 shows a bank credit card with a stripe of Drexon instead of the typical magnetic stripe on the back. Using 10-micron holes, the stripe yields 200K bytes. If both sides of the card were fully covered by Drexon recorded with 5-micron holes, storage capacity would be 5 megabytes. The card has interested manufacturers worldwide for a variety of applications.

SRI International is developing four types of equipment for Drexler to demonstrate Laser Card technology to potential licensees: a microbar reader for security access applications, a spot reader for read-only software applications, a read/write machine for spots useful as an output device, and a debit card machine. Recently, Toshiba took the first license to use Laser Card equipment, probably for personal computer applications. Drexler estimates that a Laser Card small-computer database-entry device containing 3 megabits would cost $2. Drexler expects to soon have other licensees for its technology.

The Philips Air-Sandwich

Philips began research on optical-

www.americanradiohistory.com

Which do you think is the more sophisticated computer?

Epson.

The big differences between the Epson HX-20 Notebook Computer (on the left) and the Apple Computer (on the right) are: 1) the HX-20 doesn't need a power cord, 2) the HX-20 weighs only about four pounds, and 3) the HX-20 costs a lot less money.

The Epson HX-20 Notebook Computer has a full-size keyboard, a built-in LCD screen, a built-in printer, 48K of combined RAM and ROM memory, and an internal power supply that will keep it running for over 50 hours. So you can do computing and word processing virtually anyplace you happen to be. Whereas, with the Apple Computer, you can only go as far as an extension cord will take you.

And on the HX-20, you get communications interfaces, upper and lower case letters, five program areas, a full 68 keys including an integrated numeric key pad, an internal clock/calendar, and the screen and printer. Standard. On the Apple, you pay something extra for each feature — if you can get them at all.

All of which makes the take-it-anywhere HX-20 perfect for business executives, salespeople, students, kids — anyone who's looking for an affordable, practical way into computing.

Portable. Powerful. Affordable. Sophisticated. The extraordinary HX-20 Notebook Computer. Find out just how extraordinary. Call (800) 421-5426, in California (213) 539-9140 for your nearest Epson computer dealer.

EPSON
EPSON AMERICA, INC.

www.americanradiohistory.com

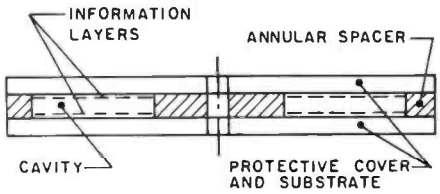

Figure 1: *Cross section of the Philips Air-Sandwich disk. The cavity is 20 mm thick and is filled with very clean air; each of the plastic substrates is 1.1 mm thick, while the thin-film tellurium recording surface is 300 angstroms thick (an angstrom is one 10-billionth of a meter).*

storage media in Holland in 1972 and since 1975 has been aiming its products at mid-range applications in both office automation and digital data processing.

North American Philips manufactures a 12-inch double-sided disk. A unique feature of Philips' media is the Air-Sandwich, shown in cross section in figure 1, which functions as a miniature clean room. The 20-millimeter (mm) cavity holds very clean air. The substrate is 1.1 mm thick, and the tellurium-alloy recording layer is 300 angstroms, for a total disk thickness of 2.5 mm.

It's possible to burn 0.7-micron holes in Air-Sandwich disks, as shown magnified about 40,000 times by a scanning electron microscope in photo 4. Track pitch is 2 microns, capacity is 1¼ gigabytes per surface, for a total of 2×10^{10} bits per disk. Errors are corrected to 1 in 10^9 bits, with 40 to 50 percent overhead for formatting and error detection and correction. The disk can provide a corrected BER of 1 in 10^{12} at the expense of capacity. Raw BER is 1 in 10^6.

North American Philips uses plastic substrates, whereas N.V. Philips in Holland uses glass for its version of the Air-Sandwich. Philips and Control Data Corporation, in a joint venture for development of disks and drives, will probably use plastic substrates, even though the Dutch prefer the more expensive glass approach. A North American Philips spokesman indicated that both versions may be produced until the market selects one or the other. A CDC spokesman thinks that glass substrates will be used on the first disks. Even though the plastic transpires water, the tellurium alloy will still allow archival life of 10 years according to accelerated life tests.

North American Philips has developed a cartridge that is necessary only for very high density recording requiring holes smaller than 0.7 micron; the cartridge will not be used with lower-density, lower-cost Air-Sandwich applications. For high-density optical recording, the fundamental limit in capacity is the resolution of the medium itself. Philips thinks that 0.3 or 0.4 micron represents the smallest recordable hole, which will be very ragged, making

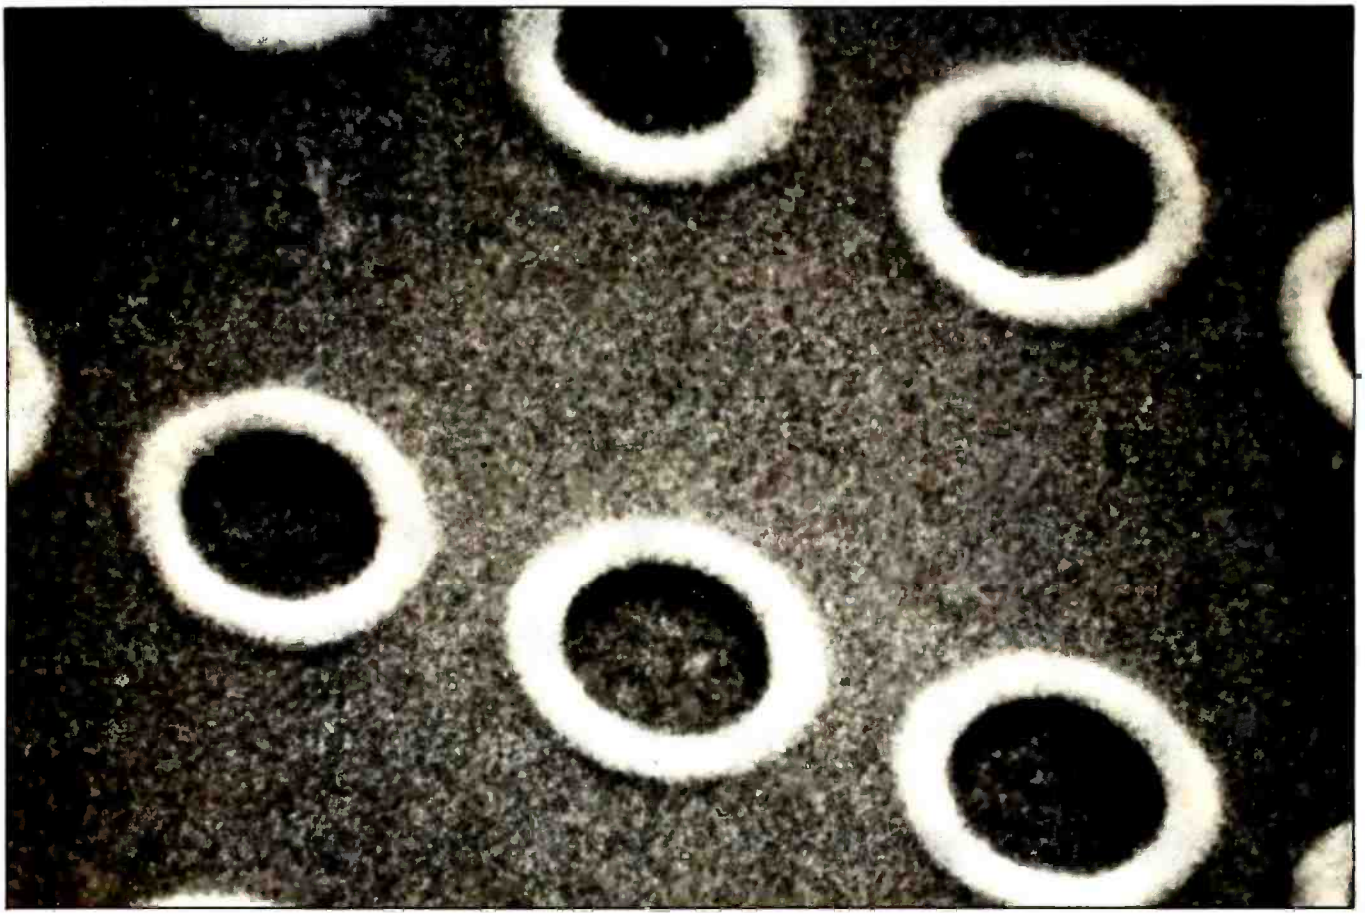

Photo 4: *Recorded surface of a Philips Air-Sandwich optical disk. In this photo, taken by a scanning electron microscope, the 0.7-micron holes are magnified 40,000 times. The Philips disk has a capacity of 1.25 gigabytes per side. See figure 1 for a cross section of the Air-Sandwich disk.*

Circle 379 on Inquiry card.

www.americanradiohistory.com

THERE'S A CONCERTO IN YOUR COMPUTER

COMPU-MUSIC

...And a waltz, a blues song, a rhapsody, and a whole lotta rock n roll. In fact, your computer can now play any kind of music, thanks to the new Roland Compu-Music.

Roland, the world's leading producer of synthesizers and electronic musical instruments, has put its years of music programming experience into a high performance computer/music synthesizer system that can easily be used by anyone—from the computer-user with a musical background to the programmer with a song in his heart.

The Roland Compu-Music does for music what the word processor has done for words. The Compu-Music software allows your computer to write, program, change and store musical compositions of up to eight voices, plus a seven voice electronic drummer. The Compu-Music hardware (CMU-800) is a music synthesizer that plays these musical parts.

The CMU-800 connects to your computer through any auxiliary slot and then connecting to any amplifier or stereo system for performance. Because the Compu-Music system is software based, it allows for virtually infinite hardware expansion. It can never become obsolete.

Playing and programming the Compu-Music is so easy that you don't have to be a musician, but if you are, you'll appreciate the well-thought-out programming, a system that Roland has used for many years with proven success. Also, the CMU-800 hardware easily interfaces with many other synthesizers for expanded performance—all controlled by your computer.

The Roland CMU-800 Synthesizer retails for $495.00. The Compu-Music Software retails for $70.00 and is available for the Apple II and NEC computers. For more information, see your computer dealer or contact: RolandCorp US, 2401 Saybrook Avenue, Los Angeles, CA 90040 (213) 685-5141.

Roland

We Design The Future

www.americanradiohistory.com

Circle 311 on Inquiry card.

IBM
personal computer
UCSD
p-System™
Version IV.1

NCI now offers
Version IV.1 which includes:

- RAMdisk
- Subsidiary Volume Support
- 8087 Numeric Coprocessor Support
- FASTER Long Integers (2x)
- FASTER Floating Point (3x)
- 25% greater floppy storage
- Floppy Write Verification
- Asynchronous Serial I/O
- Extended memory codepool
- 8086/87/88 Macro Assembler
- 8087 Native Code Generator
- program caller unit
- generalized sort unit
- 32 bit seek
- FASTER Seek
- FASTER Turtlegraphics
- Adaptable Support
- PC DOS Filer Utility
- Background Spooler

Also available

- PFAS Pascal File Access System
- Hard Disk Support
- Advanced Systems Editor
- Sprinter text formatter
- QuickISAM/PascalISAM/SuperDB
- QuickForm/PascalForm

Available for

- IBM pc
- Victor 9000

TM Regents University California
TM IBM Corporation

For more information call

Network Consulting Inc.
Discovery Park
Suite 110-3700 Gilmore Way
Burnaby, B.C. Canada V5G 4M1
604-430-3466

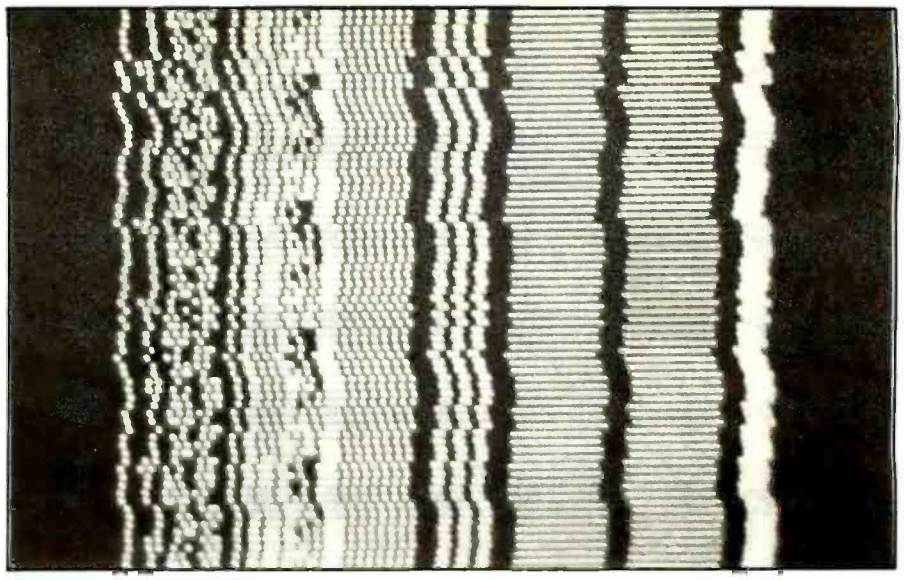

Photo 5: *Recorded surface of a Burroughs Corporation optical disk. This photo was taken by an optical microscope at 800-power magnification and clearly shows the tracks of 0.6-micron holes. Capacity of the 14-inch disk is 2 gigabytes per side.*

retrieval without errors very difficult. Capacities of 10^{12} bits per disk will require 14-inch disks.

Philips writes on its disks with diode lasers, generally in spiral patterns, and may possibly use Hitachi diode lasers for writing up to 5 million bps, but the disks are read with helium/neon gas lasers. Transfer rates over 5 million bps will require selected diode lasers, which are not yet widely available, or argon gas lasers. Reading requires about 2 mW of power. N.V. Philips in Holland finds that diode lasers that both read and write at 2 million bps are sufficient for office automation applications. North American Philips disks are not pregrooved, whereas the Dutch disks are, simplifying the recording process but lowering capacity.

Burroughs' Process

The Burroughs medium operates differently from the ablative hole-burning technique used by Philips and Drexler and the bubble-raising technique of 3M and Thomson-CSF. In the Burroughs system, laser power heats up the metal-film surface and causes an irreversible phase change of the index of refraction and the extinction coefficient (n and k, respectively). The refractive index is described by a complex number. The real part (n) describes the velocity of light going through the material and the imaginary part (k) describes the rate of absorption. Metals have very high k because light is absorbed very rapidly, as opposed to glass, which has a low k.

Although Burroughs' medium employes n and k phase change, it is not the standard crystal-to-amorphous reaction. Thus the film does not move very much, as in ablative techniques, and is compatible with a contact overcoat approach because no rims are created around the pits. It also requires much lower laser power. Using off-the-shelf helium/neon lasers, track pitch is 1.7 microns and average spot size is 0.6 micron. Most of the testing has been with 10- to 15-mW incident laser write power with 42-nanosecond (ns) exposure times. Medium threshold is described as 4 mW to 6 mW, with demonstrated read power of under 1 mW. Photo 5, taken with an optical microscope at 800-power magnification, shows data, track, and sector information written on the Burroughs medium.

The trilayer medium, with 2-gigabyte capacity, is manufactured from a standard 14-inch Winchester-disk platter spin-coated with plastic to smooth its surface. The subsequent layers, composed of an aluminum (or other metal) reflector, dielectric spacer, and absorber layer, together are a few thousand angstroms thick. The overcoat is 0.007-inch, thick

www.americanradiohistory.com

TMP software
The computer's mind.™

Regardless of what brand of microcomputer you own, the key to its productivity is the software you use. And more and more companies and individuals are relying on TMP Software to get out more work, faster.

Software so advanced it's simple.

With TMP, Total Management Planning Systems, you and your computer communicate in English. Simply follow instructions displayed on the screen to quickly and efficiently enter, save and retrieve information. And unique "Help" screens allow you to ask questions and get answers, in process, without turning to instruction manuals or erasing information you're working on.

Combine packages, maximize results.

Perhaps more importantly, once you learn the operation of one TMP Software Package, you've learned the basics of our entire sophisticated system: TMP/FreeForm™ (electronic index cards); TMP/Calc™ (electronic spread sheets and more); TMP/Manager™ (structured data base management); TMP/Writer™ (word processing/document retrieval); TMP/Front-End™ (combines packages). Each package can stand alone, or they can be integrated to form a complete, powerful system — increasing productivity and minimizing the opportunity for error.

On-going support and innovation.

TMP Software is available for most popular desk-top computers and supermicros. And new software packages are being added monthly. Videotape training programs are available on VHS, Beta and U-Matic formats.

Contact your nearest TMP Software dealer or order direct. Either way, get on line with TMP, and improve your computer's mind. Dealer inquiries invited. The United Software Company, 2431 East Douglas, Wichita, Kansas, 67211, (316) 684-5281. MasterCard, Visa and American Express. **Circle 441 on Inquiry card.**

The computer's mind.

TMP™

Total Management Planning Systems

TMP, TMP/FreeForm, TMP/Calc, TMP/Manager, TMP/Writer, and TMP/Front-End are trademarks of The United Software Company.

www.americanradiohistory.com

enough to keep dust particles out of focus and thin enough to control the thickness tolerances. This medium contains no tellurium, but Burroughs has not divulged the materials used. The disk will be factory formatted with address and sector information and will contain 600 sectors per track.

Burroughs is designing a high-performance disk with a signal-to-noise ratio of 30 decibels for broadband applications able to be transported across the country and rugged enough to be washed in case of severe contamination. To prevent that necessity, the 0.125-inch-thick disk will be encased in a 15-inch-square, 0.5-inch-thick cartridge (not hermetically sealed).

Edward LaBudde of Burroughs believes that this medium can achieve 1 in 10^{12} corrected BER after a projected 10-year lifetime. The raw BER is 1 in 10^{6}; 50 percent of the total 4-gigabyte disk capacity is used for error detection and correction, formatting, and addressing. However, Burroughs says its approach is capable of producing *no* uncorrectable errors when the disk is new.

Kodak's Approach

Kodak started developing a polymer/dye binder bilayer medium using two laser wavelengths, whereby colored dyes in a plastic material over a reflective material are written on in the infrared part of the spectrum (800 to 850 nanometers) and read in the red part (633 nanometers). The medium can now be both written and read in the infrared for system designers wishing to keep to a single laser wavelength, but Kodak recommends a two-wavelength approach. Capacity on two-wavelength-approach Kodak disks is 5.6 gigabytes per 12-inch disk side. Data can be written at 3 million bps with a 0.8-micron pit length and 1.67-micron pitch.

Packing Densities

How dense will the packing on optical disks become by the end of the century? Burroughs is already working near the diffraction limit and believes that packing density will probably not increase significantly until electron-beam or other exotic technologies are commercialized. Packing density is not the primary emphasis at Burroughs. The price/performance ratio and reliability are more important when compared with magnetic technologies.

STC foresees the possibility to increase optical-disk packing density to 1 trillion bytes per square inch by the year 2000 by recording in various colors and using filters to read just the desired data. Other researchers go even further, estimating the possibility of building disks containing 10^{21} bits.

Future Materials

Although I have indicated that almost all first-generation media will employ thin metal films in the recording layer, some industry researchers say that polymer/dye binders offer advantages in ease and cost of manufacture over thin metal films and may become the preferred material before the end of this decade. This view has raised strong controversy, however. Dr. Bell of IBM points out that polymer/dye binders have advantages and disadvantages when compared with thin metal films, adding that the issue is complex and it is not yet clear that polymer/dye binders will be the wave of the future.

Edward LaBudde of Burroughs says that polymer/dye binders will not be the trend; thin-film will remain the preferred medium until something better comes along. Thin-film technology is widespread and will invite many people to work on its problems. The enormous capital investment necessary to develop a totally new medium like polymer/dye binders may be outweighed by the sheer numbers of people involved in "mainstream" media.

In addition, LaBudde sees no inherent advantage to dye-based optical disks and believes thin metal films should be cheaper to make, even in a small operation, than polymer/dye binders because the latter require a much heavier outlay for capital equipment, such as a web

C FOR CP/M-86

- CC-86 Compiler available for both CP/M-86* and MP/M-86* (incl. IBM PC)
- Full Unix** V7 language compatibility
- Standard I/O library supports both buffered and non-buffered I/O and OS calls
- Stand-alone assembler supports relocatable code, local symbols and linkage to external modules
- Introductory prices: $500 for CC-86 and assembler/linker; $200 for assembler/linker; $50 for manual (incl. K & R)

* CP/M and MP/M are trademarks of Digital Research
** Unix is a trademark of Bell Laboratories

(503) 297-7153
Control-C Software, Inc.
6441 SW Canyon Court
Portland, OR 97221

Circle 121 on Inquiry card.

www.americanradiohistory.com

Be Wise. Be Thrifty. Be A Night Owl.

Your Own University Library Online At Home!

If you're free between the hours of six and midnight, make a date with one of the world's fastest, most powerful online information services — at a fraction of what it would cost during the business day. All you pay is a $50 registration fee to receive your classified user's password. Then, any evening, you can summon up a wealth of information for as little as $6 per hour.

Technical and scientific abstracts. Medical journals. Government studies. Business indexes. Major newspapers. BRS/AFTER DARK gives you access to the same comprehensive data files used by BRS Search Service subscribers, which include major corporations and reference libraries throughout the world. All instantly accessible with simple, interactive language.

Of course, BRS/AFTER DARK also gives you valuable peripheral services like a home-computer Newsletter and nationwide communication via electronic mail. Plus, shop-at-home services and instant software delivery programmed for the very near future.

Don't let another evening go by without BRS/AFTER DARK. All you need is your phone and any dial-up system or terminal. For more information about BRS/AFTER DARK, just fill out the coupon.

Circle 52 on Inquiry card.

BRS AFTER DARK

Sign me up as a BRS/AFTER DARK subscriber for a one-time subscription fee of $50. (Basic user's rate as low as $6 hour.) BY 3/83

☐ Charge to MASTER CARD/VISA (circle one)

Acct. No. _____ Expires _____

☐ Send more information

Signature _____

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Mail to: BRS • 1200 RT. 7 • LATHAM, NY 12110 • (518) 783-1161

www.americanradiohistory.com

press, than thin-film. This point, however, is not universally agreed upon. Once this equipment is amortized, polymers do indeed offer a cheaper method of putting down a data-storage medium and easier production techniques, and unlike tellurium, the most commonly encountered thin-metal medium, they are nontoxic.

The main champions of the polymer/dye binder medium are Kodak and other major film producers, who can take advantage of already installed web coating equipment used to process Kodacolor and similar films; the same machinery can be used to make optical disks to keep the equipment running at full capacity. The web coating process, however, employs a flexible substrate rather than the rigid substrate used on other optical disks, leading some experts to speculate that polymer-based media might eventually find their way onto the market late in the decade as the low-cost 3- to 5-inch optical floppy disks predicted by many observers.

A wide variety of other potential optical-media materials are being reported on at scientific conferences. Some of the more exotic include diazo, photochromics, amorphous semiconductors, spectral-hole burning in crystals, surface texturing, copper sulfate in glass, and frequency domain storage.

Copper Sulfate in Glass: Archival Master Disks?

Copper sulfate in glass, researched at Xerox's Advanced Development Laboratory in El Segundo, California, has implications for both optical disks and videodisks. The process yields a disk that should be absolutely archival, perhaps lasting thousands of years. The technique involves using copper ion-exchanged glass, which is simple and cheap to produce.

An optically absorbing region is formed extending up to 8 microns into the Pyrex 7740 glass surface, forming a monolithic structure. The glass is immersed in molten copper salt at 550°C for between 15 seconds and 6 hours. The sodium out-diffuses and the copper in-diffuses. Focused laser light causes localized perturbations on the surface, appearing as raised hemispherical bumps, rather than hollow bubbles. A density of 10^8 bumps per centimeter squared has been achieved.

Although the bump-forming mechanism is not understood, the medium has great promise to be used as an optical disk or videodisk master because no encapsulation is needed for the bumps. However, a 150-mW argon laser is needed, calling for about 10

OHSq has strong optical absorption extending into the infrared.

times the laser power required with other media. Writing is at 488 nanometers, with reading done either with an argon laser with reduced power, or a helium/neon laser.

IBM Studies Hydroxy Squarylium

IBM is looking at many different materials for optical media. Some of the more promising research the firm has disclosed relates to organic dyes. One of the most interesting of these is hydroxy squarylium (OHSq), which has a melting point of 360°C, compared to tellurium's 450°C, but requires 60 percent higher laser power for writing and reading than tellurium.

OHSq appeals to researchers because it has strong optical absorption extending into the infrared, excellent thermal and optical stability, and can be either solvent coated or evaporated in preparing disks, offering substantial cost savings. OHSq disks were subjected to 10 million readouts before a 10 percent degradation in data occurred, more than adequate stability for digital data storage applications.

Cryogenic Frequency Domain Storage

An even more esoteric optical-media research project at IBM concerns the frequency-domain-storage approach, the most important feature of which is that up to 1000 data bits can be stored in frequency space at each spatial location, so that a fixed media/scanning read/write spot system can yield extremely high data rates and packing densities. Despite the lack of threshold exhibited by photochemical hole-burning materials, IBM reports that up to 10 million read cycles were possible on relatively low-sensitivity media while maintaining a signal-to-noise ratio of 10 to 1. The technique provides for reversible media but requires that the system be kept at cryogenic temperatures: 4 kelvins, close to absolute zero.

Surface Texturing

Bell Laboratories has done considerable work using reactive ion etching to microscopically texture the surface of optical media to produce submicron-sized columns and cones. Although they have formed textured surfaces in metals, semiconductors, and insulators, germanium and silicon have produced the best results. The textured surface is not reflective. When hit with 10 mW of laser power, the structures are melted away, leaving a spot 100 times as reflective as before. The technique produces no debris or rims around the recorded spots. Bell Labs finds the technique much more stable and permanent than systems using tellurium, and it may be possible to use the disk as a master to replicate copies.

Looking Ahead

Where is all this leading? Little about the composition of optical media will matter to most users; the media, along with system hardware and software, will have to be transparent to the user in order to gain wide acceptance. Research is moving quite rapidly in the optical-media field, and only time will tell if this most promising technology will catch on with the computing public, or whether it will be cast aside as some other promising technologies have been in the recent past. Fortunately, most of us dedicated to informing the industry and public about developments in optical recording technology believe predictions are realistic that by 1990, most digital and image data will be stored on low-cost, removable, high-density optical media. ■

www.americanradiohistory.com

GP-100A: US$389

COMMAND PERFORMANCE.

Seikosha gives you all the best features—including economy and super-clear graphics.

Unlike some graphic printers, Seikosha's new GP-100A Uni-Hammer Graphic Printer puts full dot addressable graphics at your command. The GP-100A lets you repeat a column of data as many times as needed with just one command. Software control enables double-width character output, and the positioning is both character and dot addressable. Designed for simple operation, it ranks among the most cost-efficient graphic printers on the market. Command performance technology that not only works for you now, but takes you well into the future.

Other valuable features:

- Graphics, regular and double width character modes can be intermixed on the same line.
- Automatic printing. When the text exceeds the maximum line length, there is no loss of data due to overflow.
- Self-test printing is a standard feature.
- Centronics type parallel interface.
- Paper width is adjustable up to 10 inches.
- Optional Interface: RS232C, IEEE488, apple II, etc.

Graphic Printer GP Series

Available at COMPUTERLAND and other fine stores in your area

Circle 388 on Inquiry card.

Distributed by **AXIOM CORPORATION** 1014 Griswold Avenue San Fernando, Calif. 91340 Phone (213) 365-9521 TWX (910) 496-1746
Manufactured by **SEIKOSHA SYSTEM EQUIPMENT DIV.** 4-1-1 Taihei Sumida-ku Tokyo Japan. Phone: 03-623-8111 Telex: 262-2620

www.americanradiohistory.com

The Choice of

Computer Exchange — The Supply Center for the IBM-PC

SOFTWARE for the IBM-PC

BUSINESS

		LIST PRICE	OUR PRICE
★ ASHTON-TATE, dBase II, requires CP/M-86 & 128K		$ 700	$419
dBase II, requires PC-DOS & 128K		$ 700	$449
APPLIED SOFTWARE TECHNOLOGY, Versaform	NEW!	$ 389	$265
DATAMOST, Real Estate Investment Program	NEW!	$ 130	$ 89
Write-On		$ 130	$ 89
EAGLE SOFTWARE, Money Decisions	NEW!	$ 150	$129
HOWARDSOFT, Real Estate Analyzer II		$ 250	$189
INFORMATION UNLIMITED, Easywriter II (a WPS)		$ 350	$259
Easyspeller (88K Words)		$ 175	$129
Easyfiler (a DBMS)		$ 400	$299
INNOVATIVE SOFTWARE, T I M III (a DBMS)		$ 495	$369
★ INSOFT, Data Design (a powerful easy to use DBMS)	NEW!	$ 225	$169
ISA, Spell Guard		$ 295	$220
ISM, MatheMagic		$ 90	$ 69
★ MICROCRAFT, Requires CP/M-86			
Legal Billing & Time Keeping — Verdict		$ 750	$395
Professional Billing & Time Keeping — Billkeeper		$ 750	$395
★ MICRO LAB, The Tax Manager		$ 250	$189
★ MICROPRO, WordStar® plus free WordStar Training Manual		$ 495	$249
MailMerge™		$ 250	Call
SpellStar™		$ 250	Call
3 Pak, Word & Mail & Spell, above 3		$ 845	Call
InfoStar	NEW!	$ 495	$335
ReportStar	NEW!	$ 350	$235
Note: Price increase due soon on Micropro. Call first.			
MICROSOFT, Flight Simulator (by Sub-Logic)	NEW!	$ 50	$ 35
NORELL, Visualize		$ 100	$ 75
Easy Data DBMS		$ 250	$189
NORTH AMERICAN BUS. SYSTEM, The Answer		$ 250	$169
PBL CORPORATION, Personal Investor	NEW!	$ 145	$ 99
★ PEACHTREE, Peach Pak 4 (GL, AR & AP)		$ 595	$395
PERFECT SOFTWARE, Perfect Writer™		$ 389	$239
Perfect Speller™		$ 189	$119
Perfect Filer™		$ 289	$179
SELECT INFO, Select (a WPS)		$ 595	$339
SORCIM/ISA, SuperCalc		$ 295	$199
SuperWriter		$ 395	$269
STC, The Creator	NEW!	$ 200	$139
SYNERGISTIC, Data Reporter	NEW!	$ 250	$169
★ VISICORP, VisiCalc®/256K		$ 250	$179
VisiDex or VisiSchedule, each		$ 250	$199
VisiTrend/Plot		$ 300	$219
VisiFile or Desktop Plan I, each		$ 300	$239

UTILITY

1983 CE SOFTWARE AWARD:
"Copy II PC by Central Point Software is the best CE software buy of 1983. It will copy more copy protected software and faster than any other backup system. Unlike other copiers it makes an exact duplicate of your original and it does 100% verification of copy. Documentation is excellent."

★ CENTRAL POINT, Copy II PC, Backup and Utility	NEW!	$ 40	$ 35
NORELL DATA, System Backup		$ 50	$ 39
NORTON, Norton Utilities, 14 powerful programs, 3 disks		$ 80	$ 65

HOME & EDUCATIONAL

AUTOMATED SIMULATIONS, Temple of Apshai		$ 40	$ 29
Dit Barons	NEW!	$ 100	$ 75
BRODERBUND, Apple Panic		$ 30	$ 22
★ CONTINENTAL, The Home Accountant Plus		$ 150	$112
DATAMOST, Pig Pen or Space Strike, each		$ 30	$ 22
DAVIDSON, The Speed Reader		$ 75	$ 55
INFOCOM, Deadline		$ 50	$ 39
Zork I or Zork II or Zork III, each		$ 40	$ 29
★ INSOFT, WordTrix	NEW!	$ 35	$ 29
QuoTrix	NEW!	$ 35	$ 29
ON-LINE, Golf Challenge	NEW!	$ 25	$ 19
Ulysses & The Golden Fleece		$ 35	$ 25
PBL CORP., Personal Investor		$ 145	$ 99
SENTIENT, Cyborg	NEW!	$ 35	$ 25
SIRIUS, Conquest or Call to Arms, each		$ 30	$ 23
SPINNAKER, Snooper Troops, #1 or #2, each		$ 45	$ 35
Story Machine or Face Maker, each		$ 35	$ 25
STRATEGIC, The Warp Factor		$ 40	$ 30

DISKETTES

Control Data Corporation 12 for 10 Special. Limited Time!

COC, 120 each, 5¼ with ring, SS, SD (Apple, IBM, etc.)	$ 450	$195
12 each, 5¼, with ring, SS SD (Apple, IBM, etc.)	$ 40	$ 22
12 each 8", SS, SD	$ 51	$ 28
10 each, 5¼, SS, DD (H/P, IBM, etc.)	$ 65	$ 49
IBM, 10 each, 5¼, SS, SD (Apple, IBM, etc.)	$ 60	$ 45
10 each, 5¼, SS, DD (H/P, IBM, etc.)	$ 65	$ 49
VERBATIM, 10 each 5¼, with ring, SS, SD or SS, DD	$ 50	$ 28
MAXELL, 10 each, 5¼, SS, DD or SS, SD	$ 55	$ 35
OYSAN, 10 each, 5¼, SS, SD	$ 55	$ 39
10 each, 5, DS, DD	$ 65	$ 49

★ Means a BEST buy.

Ad #962

Hot Line For Information On Your Order (503) 772-3803

64K IBM-PC $2850

IBM is a trademark of IBM Corporation.



System Includes
Two 320K Disk Drives
12" Green Amdek Monitor

90 Day Warranty

Call For Details And Other Configurations

HARDWARE for the IBM-PC

		LIST PRICE	OUR PRICE
MEMORY CHIP KITS, 64K add on to your memory cards. 9 chips. 200NS, tested and burned-in. 90 day warranty		$ 50	$ 39
AST RESEARCH Combo Plus, 64K with async. port,		$ 495	$359
Combo Plus, 64K with parallel port,		$ 495	$359
Combo Plus, 64K w/async. & para.		$ 555	$395
Combo Plus, 64K w/async. para. & clock/cal.		$ 595	$429
For above Combo Plus of 128K add $85, for 192K add $192, for 256K add $256.			
BUY VALUE of the YEAR: ComX RAM Cards come with DISRAM™ software. Disk/RAM software that makes your RAM look like a disk. 64K RAM Card (192K when full)			
+2 year warranty		$ 395	$149
192K RAM Card + 2 year warranty		$ 675	$249
CURTIS, PC Pedestal™ for Display on PC		$ 80	$ 65
9 Foot Cable for IBM Keyboard (extends 3' to 9')		$ 50	$ 35
Mono. Extension Cables. Power and Signal		$ 55	$ 45
DAVONG OSI-501 Hard Disk, 5 Meg		$1995	$1495
OSI-501, 6 MB Hard Disk		$1995	$1495
OSI-512, 12 MB Hard Disk		$2495	$1895
OSI-519, 19 MB Hard Disk		$2995	$2295
MAYNARO, Floppy Drive Control Board, for up to 4 drives With Serial Port add $40. For Parallel Port add $70.		$ 195	$165
MICROSOFT 64K RAM Card w/Parity		$ 350	$259
128K RAM Card w/Parity		$ 525	$395
256K RAM Card w/Parity		$ 875	$659
Q.C.S. Big Blue		$ 595	$449
QUADRAM CORPORATION			
Quadboard, 64K, expandable to 256K, 4 function board		$ 595	$435
Quadboard, 128K, expandable to 256K, 4 function board		$ 775	$565
Quadboard, 192K, expandable to 256K, 4 function board		$ 895	$635
★ Quadboard, 256K, four function board		$ 995	$670
Microfazer, w/Copy, Par/Par, 8K, #MP8		$ 159	$119
Microfazer, w/Copy, Par/Par, 64K, #MP64		$ 299	$235
Microfazer, w/Copy, Par/Par, 128K, #MP128		$ 445	$345
Microfazer, Snap-on, 8K, Par/Par, Epson, #MEB, w/PSI		$ 159	$145
Microfazer, Snap-on, 64K, Par/Par, Epson, #ME64, w/PSI		$ 299	$235
All Microfazers are expandable (w/copy to 512K) (Snap-on to 64K).			
TG PRODUCTS, Joystick		$ 65	$ 49
★ XEDEX baby blue 64K plus CP/M-80 operation		$ 600	$399
ControlData OR Tandon DISK DRIVES, Double Sided 320K. Same as now supplied with IBM—PC. Tested, burned-in and with installation instructions. 90 day warranty by us.	1 each	$ 650	$249
	2 or more	$ 650	$239

PRINTERS AND ACCESSORIES

		CALL	CALL
EPSON,			
★ NEC, Dot Matrix, 8023 Printer F/T		$ 695	$525
STAR MICRONICS, 9x9 Dot Matrix, 100cps, 2.3K, Gemini 10"		$ 499	$385
9x9 Dot Matrix, 100cps, 2.3K, Gemini 15"		$ 649	$495
ANADEX, DP8000 Dot Matrix, 120cps, Serial & Cent. Para. I/F		$ 995	$495
EPSON,			
IBM-PC to Epson or Star Micronics		$ 60	$ 45
Apple Interface and Cable for Epson		$ 95	$ 59
Grappler+ by Orange Micro, specify printer		$ 165	$119
Apple Graphics Dump Program		$ 15	$ 9
APPLE COMPUTER INC., Silentype Printer for Apple II		$ 395	$335
LETTER QUALITY — DAISY WHEEL PRINTERS:			
OLYMPIA, ES-100, Printer/Typewriter, complete with serial interfacing to the Apple II or IBM-PC		$1735	$1295
COMREX, Comriter CR-1, RS232 Serial I/F, 200 wpm		$1199	$845
Comriter Tractor Feed for CR-1		$ 118	$ 99
SUPPLIES: Tractor Feed Paper, Ribbons, Heads, Qume Daisy Wheels & Ribbons.			

8" CP/M-80

BUSINESS & SYSTEM SOFTWARE

		LIST PRICE	OUR PRICE
★ ASHTON-TATE dBase II		$ 700	$419
COMSHARE TARGET, Target PlannerCalc		$ 99	$ 39
Masterplanner		$ 325	$225
PlannerCalc Applications Pkg.		$ 50	$ 40
PlannerCalc Combo Pkg.		$ 125	$ 65
INFOCOM, Deadline		$ 60	$ 45
Zork I or Zork II or Zork III or Starcross, each		$ 50	$ 39
ISM, MatheMagic		$ 100	$ 75
MICROCRAFT, Legal Billing & Time Keeping		$ 750	$395
★ Prof. Billing & Time Keeping — Billkeeper		$ 750	$395
MICROPRO, WordStar® plus free WordStar Training Manual		$ 495	$249
MailMerge™		$ 250	$ 79
SpellStar™		$ 250	Call
3 Pak, Word & Mail & Spell, 3 above		$ 845	Call
InfoStar	NEW!	$ 495	$335
ReportStar	NEW!	$ 350	$235
Multiplan		$ 275	$199
Fortran 80		$ 500	$325
BASIC Compiler		$ 395	$295
COBOL-80		$ 750	$545
BASIC-80		$ 350	$275
muLisp/muStar-80		$ 200	$145
M-Sort-80		$ 195	$145
Edit-80		$ 120	$ 80
Macro-80		$ 200	$145
OASIS, The Word Plus (45,000 word verification)		$ 150	Call
PEACHTREE, Magic Wand		$ 500	$195
Series 4 GL, AR, AP or Inventory, each		$ 600	$395
Series 8 GL, AR, AP, Inv. or Pay. each		$ 750	$495
Series 9 Peach Text		$ 500	$330
Series 9 Spelling Proofreader		$ 300	$195
Series 9 Calc, Mail List or Telecomm., each		$ 375	$245
PERFECT SOFTWARE, Perfect Writer™		$ 389	$239
Perfect Speller™		$ 189	$119
Perfect Filer		$ 289	$179

MONITORS

NEC, 12" Green	$ 249	$159
12" Color, Composite	$ 450	$349
SANYO, 9" B&W	$ 190	$149
9" Green	$ 200	$139
12" Green	$ 260	$199
13" Color, Composite	$ 470	$349
13" Color RGB	$ 995	$795
ZENITH, 12" Green	$ 150	$119
AMOEK, 12" Green #300	$ 200	$159
13" Color I, Composite	$ 449	$359
13" Color II, RGB, Hi Res. (Ap. II, III & IBM-PC)	$ 899	$799
13" Color III, RGB, Commercial, (Ap. II, III)	$ 569	$469
OVM, Color II or III to Apple II Interface	$ 199	$175
Note: Color II and III come with cable for IBM-PC.		

MODEMS AND TELE COMMUNICATIONS TERMINAL

HAYES, Micromodem II (for the Apple II)	$ 379	$275
Apple Terminal Program for Micromodem II	$ 99	$ 69
MICROCOM, Micro Courier for Apple II	$ 250	$125
Micro Telegram for Apple II	$ 250	$125
SSM, Transcend 1 for Apple II Data Comm.	$ 89	$ 69
NOVATION, Applecat II Modem	$ 389	$269
212 Apple Cat	$ 725	$599
HAYES, Stock Chronograph (RS-232)	$ 249	$189
Stock Smartmodem (RS-232)	$ 289	$225
Smartmodem 1200 (RS-232)	$ 699	$535
Micromodem 100 (S-100 bus)	$ 399	$275
SIGNALMAN, Modem Mkl (RS-232)	$ 99	$ 79
IBM-PC to Modem Cable	$ 39	$ 29
AXLON, Datalink 1000 Hand Held Communications Terminal	$ 399	$325

★★ CORVUS SYSTEMS

★	6 Meg Hard Disk, w/o interface	$2995	$1895
★ ★	11 Meg Hard Disk, w/o interface	$4795	$2695
	20 Meg Hard Disk, w/o interface	$5795	$3495
IBM PC Interface (IBM DOS), Manual & Cable 5		$ 300	$239
Mirror built in for easy backup		$ 790	$595
Apple Interface, Manual & Cable 5		$ 300	$239
Omni Disk Server for Apple II	(Special)	$ 990	$495
Omni Transporter Card Apple II	(Special)	$ 495	$275
Omni Junction Box Set	(Special)	$ 39	$ 25
Other Interfaces, Omni-Net, Constellation, Mirror. All in Stock.			

hp	H/P 7470A Graphics Plotter	$1550	$1195
	H/P 41C Calculator	$ 195	$149
	H/P 41CV Calculator with 2.2K Memory	$ 275	$219
	Full 41 accessory and software in stock. Call.		

Portland, OR Cash & Carry Outlet, 11507-0 SW Pacific Hwy., Terrace Shopping Center, Portland, OR. Over-the-counter sales only. On 99W between Rte. 217 and Interstate 5. Open M-F 10-6, Sat. 10-3. Call 245-1020.

ORDERING INFORMATION AND TERMS: All Mail: P.O. Box 23068, Portland, OR 97005
All items usually in stock. We immediately honor Cashiers Checks, Money Orders, Fortune 1000 Checks and Government Checks. Personal or Company Checks allow 20 days to clear. No C.O.D. Add 3% for VISA or MC. Include telephone number. Add 3% for shipping, insurance and handling (S.I.&H) with $5 minimum. UPS ground is standard so add 3% more for UPS Blue with $10 minimum. Add 12% total for S.I.&H for U.S. Postal, APO or FPO with $15 minimum. For Hawaii, Alaska and Canada, UPS is in some areas only, all others are Postal so call, write, or specify PO. Foreign orders except Canada for S.I.&H add 18% or $25 minimum except for monitors add 30% or $50 minimum. Prices subject to change and typo errors, so call to verify. All goods are new, include factory warranty and are guaranteed to work. Due to our low prices, all sales are final. Call before returning goods for repair or replacement. Orders received with insufficient S.I.&H charges will be refunded. ORDER DESK HOURS 8 to 6 PST M-F and 10 to 4 Sat. 1 PM here is 4 PM in NY.

OUR REFERENCES: We have been a computer dealer since 1978 and in mail order since 1980. Banks: First Interstate Bank, (503) 776-5620 and Jefferson State Bank, (503) 773-5333. We belong to the Chamber of Commerce, (503) 772-6293, or call Dun & Bradstreet if you are a subscriber. Computer Exchange is a division of O'Tech Group, Inc.

www.americanradiohistory.com

Professionals T.M.

LOW PRICES TO PROFESSIONALS WHO KNOW WHAT THEY WANT AND KNOW HOW TO USE IT.

Manufactured Exclusively for Bell & Howell by apple computer

CALL US ON THE APPLE IIE

	LIST PRICE	OUR PRICE
B&H APPLE II+		
64K (48K+OUR 16K CARD)	$1725	$1150
Disk, Micro Sci A2 w/3.3 Controller	$ 579	$ 378
Disk, Micro Sci A2 Only	$ 479	$ 299

The B&H Apple II+ differs from the Apple Apple II+ only in that it is in black hammertone color and its warranty is longer.
Warranty: Factory warranty is by Bell and Howell (not by Apple) and is one year parts plus 90 day labor. Warranty service available at Bell and Howell service centers or return to Computer Exchange.

SPECIAL

B & H APPLE II+ 64K STARTER SYSTEM $1,595
SAVE $ 834

- 48K B&H APPLE II+
- ComX 16K RAM Card. 2 Year Warranty
- Micro Sci A2 Disk Drive with 3.3 Controller
- Central Point Filer, Apple II+ 3.3 DOS plus many utility programs
- Sanyo 9" Green Monitor
- RF Modulator (for color TV)
- Game Paddles
- Game with Color Graphics and Sound

μ-SCI MICRO-SCI FORTHEAPPLEII/II+.III DIRECT SUBSTITUTES for APPLE DRIVES

Micro-Sci A2 drives and/or controllers are direct plug compatible substitutes for Apple drives and controllers.

	LIST PRICE	OUR PRICE
For Apple II		
A2, 5¼", 143K Disk Drive	$ 479	$299
Controller Card for A2 Drive	$ 100	$ 79
A40, 5¼", 160K Disk Drive	$ 449	$339
A70, 5¼", 286K Disk Drive	$ 599	$459
Controller for A40 or A70	$ 100	$ 79
Filer, Disk Utility Software	$ 20	$ 15

apple® II/II+/IIE supply center

HARDWARE
for Apple II

	LIST PRICE	OUR PRICE
★ RAM EXPANSION:		
★ ComX RAM Card 16K	$ 179	$ 49
★ ALS. ADDRam 16K	$ 149	$ 79
★ Microsoft. RAMCard 16K	$ 100	$ 89
★ Saturn Systems. RAM Card 32K	$ 249	$169
RAM Card 64K	$ 425	$319
Axlon. RAM Card 128K	$ 475	$375
RAM Disk System 320K	$1395	$995
80 COLUMN VIDEO CARDS:		
★ ALS. Smarterm II	$ 179	$139
Dirt Cheap Video	$ 89	$ 69
Color II	$ 179	$139
Videx. Videoterm	$ 345	$229
Vista. Vision 80	$ 395	$199
MISCELLANEOUS:		
ALS. The CP/M Card	$ 399	$299
Z-Card	$ 169	$129
16K ADDRam Special	$ 149	$ 79
Synergizer w/S'calc + Condor	$ 749	$529
Axlon. 320K RAM Disk System	$1395	$995
ASTAR. RF Modulator	$ 35	$ 25
CCS. Serial Interface 7710A	$ 150	$129
Other CCS Cards in stock	Call	Call
Dan Paymar, Lower Case Chips	$ 50	$ 39
Don't Ask, DAO 003 S.A. Mouth	$ 125	$ 85
★ Eastside, Wild Card, copier	$ 130	$ 99
Kensington. System Saver	$ 90	$ 69
Krafl. Joystick	$ 65	$ 49
Paddle	$ 50	$ 39
M&R. Sup R fan	$ 50	$ 39
★ Microsoft. Z80 Softcard	$ 345	$245
★ Softcard Premium Pack	$ 695	$495
Z80 Softcard Plus	$ 645	$459
16K RAMCard	$ 100	$ 89
Mountain. CPS Multifunction Card	$ 239	$199
Orange Micro. Grappler Plus	$ 165	$119
Practical Peripherals.		
MBS 8K Serial (Epson)	$ 159	$129
MBP 16K Para (Epson)	$ 159	$129
Microbuffer II 16K, (specify)	$ 259	$209
Microbuffer II 32K, (specify)	$ 299	$229
★ PCPI. AppliCard. 14 features.		
6 Mhz	$ 595	$435
RH Electronics. Super Fan II	$ 75	$ 59
SSM.A10-11.Serial/Para.Interface	$ 225	$169
TG Products. Game Paddles	$ 40	$ 29
Joystick	$ 60	$ 45
Select-A-Port	$ 60	$ 45
★ Videx. Videoterm 80 col.	$ 345	$229
Soft Video Switch	$ 35	$ 25
Enhancer II	$ 149	$ 99
Function Strip	$ 79	$ 59
PSIO. Para/Ser Interface	$ 229	$169
Full Videx Line. Call. Up to 35% off.		
WICO. Trackball	$ 80	$ 55

SOFTWARE
on disk for Apple II/II+/IIE

BUSINESS

	LIST PRICE	OUR PRICE
Apple Computer. Inc.		
The Controller GL. AR. AP	$ 625	$299
Apple Fortran	$ 200	$159
How to! (Educational)	$ 50	$ 25
Apple Logo	$ 175	$149
50% off other Apple Inc. software		Call
Applied Soft Tech.. VersaForm	$ 389	$265
Artsci. MagicWindow II New!	$ 150	$ 99
Ashton-Tate. dBase II (CP/M)	$ 700	$439
Continental. GL. AR. AP or PR. ea	$ 250	$169
1st Class Mail	$ 75	$ 49
Home Accountant	$ 75	$ 49
Hayden. Pie Writer (Specify brd.)	$ 170	$ 99
★ High Tech.. Job Cost System	$ 750	$350
Info Master	$ 189	$119
Howard Soft.		
Real Estate Analyzer II	$ 195	$129
Tax Preparer	$ 150	$ 99
Info. Unlim.. Easywriter (PRO)	$ 175	$119
★ ISA. Spellguard (CP/M)	$ 295	$ 99
LJK. Letter Perfect w/MailMerge	$ 150	$ 99
★ Micro Craft. (CP/M)		
Professional Billkeeper	$ 750	$395
Legal Billing & Timekeeping	$ 750	$395
Micro Lab. Invoice Factory	$ 200	$ 99
Tax Manager	$ 150	$ 99
Micro Pro. (all CP/M)		
WordStar® + Training Manual	$ 495	$199
MailMerge™	$ 250	$ 69
SpellStar™	$ 250	Call
SPECIAL! All 3 above	$ 895	Call
Data Star™	$ 295	Call
Microsoft. Multi-Plan (CP/M)	$ 275	$175
Multi-Plan (DOS 3.3) New!	$ 275	$175
Muse. Super Text 40/80	$ 175	$129
Super Text 40/56/70 New!	$ 125	$ 95
★ On-Line. ScreenWriter II	$ 130	$ 89
The Dictionary New!	$ 100	$ 69
General Manager II New!	$ 230	$155
Osborne/C.P. Soft. (Disk and Book)		
★ Some Common Basic Programs. 75 Business, Statistics and Math programs for the Apple II	$ 100	$ 49
★ Practical Basic Programs 40 more very valuable programs beyond "Some Com BasicProg"	$ 100	$ 49
Peachtree. Requires CP/M and MBASIC. Specify Videoterm or 40 columns.		
Series 40 GL & AR & AP. all 3	$ 595	$395
Series 40 Inv. or Pay.. ea.	$ 400	$275
Series 9Text& Spell&Mail.all3	$ 595	$395
Series 80 GL & AR & AP. Videx	$ 595	$395
Perfect. Perfect Writer	$ 389	$239
Perfect Speller	$ 189	$119
Perfect Filer	$ 289	$179
Quality. GBS w/3 gen. (a DBMS)	$ 650	$475
Sensible. Sens. Speller. specify	$ 125	$ 85
★ Silcon Valley. Word Handler	$ 250	$139
Sof./Sys.. Executive Secretary	$ 250	$169
Executive Speller	$ 75	$ 55
★ Solidus. Stockfile	$ 600	$350
Stockseller	$ 700	$450
Systems Plus		
Acctg. Plus. General Ledger	$ 425	$295
Acctg. Plus. GL. AP and A/R	$ 995	$595
Acctg. Plus. above + Inventory	$1395	$775
Software Publishing. PFS II	$ 125	$ 85
Report	$ 95	$ 65
Graph	$ 125	$ 85
Southeastern Data Capture, call to specify.		
STC. The Creator NEW!	$ 200	$139
Stoneware. DB Master	$ 229	$155
DB Utility I or II	$ 99	$ 69
Videx.		
★ Applewriter II preboot disk	$ 20	$ 15
Visicalc to 64K preboot disk	$ 50	$ 39
Visicalc to 176K preboot disk	$ 90	$ 69
VisiCorp/Personal Software.		
★ Visicalc 3.3	$ 250	$179
VisiDex Special!	$ 250	$150
VisiFile	$ 250	$179

UTILITY & DEVELOPMENT

	LIST PRICE	OUR PRICE
Beagle. Utility City	$ 30	$ 22
OOS Boss	$ 24	$ 18
AppleMechanic New!	$ 30	$ 22
Central Point Software		
★ Filer. OOS Utility	$ 20	$ 15
★ Copy II Plus (bit copier)	$ 40	$ 35
Epson. Graphics Dump	$ 15	$ 9
Insoft.		
GraFORTH by Paul Lutus	$ 75	$ 59
TransFORTH II by Paul Lutus	$ 125	$ 99
Microsoft.		
A.L.O.S.	$ 125	$ 75
BASIC Compiler	$ 395	$299
Cobol 80	$ 750	$559
Fortran 80	$ 195	$149
TASC Compiler	$ 175	$159
★ Omega. Locksmith (bit copier)	$ 100	$ 75
Penguin.Comp.GraphicsSys.New!	$ 70	$ 53
Graphics Magician New!	$ 60	$ 41
Phoenix. Zoom Grafix	$ 40	$ 29
Quality. Bag of Tricks New!	$ 40	$ 29
Sensible. Back It Up. (bit copier)	$ 60	$ 49

HOME & EDUCATION

	LIST PRICE	OUR PRICE
Broderbund.		
Apple Panic	$ 30	$ 21
Arcade Machine	$ 45	$ 40
Choplifter New!	$ 35	$ 26
Many others		Call
Budgeco. Raster Blaster	$ 29	$ 22
★ Continental. Home Accountant	$ 75	$ 49
Datamost. Snack Attack	$ 30	$ 24
Datasoft. CanyonClimber New!	$ 30	$ 23
Edu-Ware. Several in stock	Call	Call
Auto. Simulations.		
Introductory 3-Pack	$ 50	$ 35
Hayden. Sargon II (Chess)	$ 35	$ 29
Infocom. Deadline	$ 50	$ 38
★ Insoft. Electric Duet by Lutus	$ 30	$ 25
Zargs New!	$ 35	$ 27
Spider Raid New!	$ 30	$ 24
Lightning. Mastertype	$ 40	$ 29
Microsoft. Olympic Decathlon	$ 30	$ 24
Typing Tutor II	$ 25	$ 15
Muse. Robot War	$ 40	$ 29
Castle Wolfenstein	$ 30	$ 23
On-Line. Frogger New!	$ 35	$ 25
Ultima II	$ 55	$ 40
Softporn (X Rated)	$ 30	$ 22
Piccadilly. Warp Destroyer	$ 30	$ 23
Sirius. Gorgon	$ 40	$ 29
Sir-Tec. Wizardry	$ 50	$ 39
Knight of Diamonds. New!	$ 35	$ 26
Sub Logic. Flight Simulator	$ 34	$ 25
Pinball	$ 30	$ 23
Strategic. Southern Command	$ 60	$ 45

OTHER BRANDS IN STOCK. CALL.

WHILE THEY LAST

● OVERSTOCK SPECIALS ● FOR APPLE II/II+

ComX 16K RAM Card, 2 Yr. Warranty	$ 179	$ 49
Microsoft 16K RAMCard	$ 195	$ 89
Saturn Systems. 32K RAM Card	$ 249	$169
ALS Synergizer Pack, Supercalc plus Condor Jr.	$ 749	$529
Videx Videoterm, 80 column card	$ 345	$229
CCS. Serial Interface 7710A	$ 150	$129
Centronics Interface 7728	$ 110	$ 85
Calender Clock 7424A	$ 120	$ 95
Centronics Interface 7720B	$ 120	$ 95

This Month **50% OFF** While They Last
VIC 20 and VIC 20 Hardware and Software
ATARI. 400 and 800 Peripherals and Software
NEC. 8001 Hardware and Software
XEROX 820 Computer System, with Drives Moniter and CP/M, was $3,695, now $1,495
ANADEX. DP8000. Dot Matrix Printer, $495

AXLON The Leader In Atari Add-on's

★ Rampower 128K System (for the Atari 800)	$ 475	$350
★ Rampower 48K Module (for 400)	$ 185	$135
Rampower 32K (for the Atari 400 or 800)	$ 120	$ 89

Free with above 3: Ramscan. Diagnostic Diskette.

Ad #962

THE WORLD'S LARGEST COMPUTER MAIL ORDER FIRM

Computer Exchange™

NATIONAL ORDER DESK **TOLL FREE (800) 547-1289**
All Other Orders Including Oregon: 772-3256

ALL MAIL: P.O. Box 23068, Portland, OR 97005
SHOWROOM AT 11507D SW PACIFIC HWY., PORTLAND, OR. OPEN M-F 10-6

Circle 470 for IBM Peripherals Circle 471 for Apple Circle 472 for all others

www.americanradiohistory.com

Will Removable Hard Disks Replace the Floppy?

Improved data-storage technologies may eventually eliminate floppy disks.

Larry Sarisky
Syquest Technology
47923 Warm Springs Blvd.
Fremont, CA 94539

The floppy-disk drive has been the method of choice for data storage for several years now. But like all de facto standards, its dominance is being challenged, in this case by the development of a new storage medium—the removable hard-disk cartridge.

The cartridge appears to offer all the advantages of the floppy disk as well as increased storage capacity and access speed. But before describing this new method of data storage, let's take a look at how and why floppy disks were developed.

When IBM introduced the System/360 computers, their low-level microcode programs were stored in read-only memory (ROM). By the time the IBM 370 was developed, however, semiconductor technology had advanced so far that microcode storage could be implemented in semiconductor memory. This memory was volatile, so a microcode loading-and-storage device was necessary. Magnetic tape was considered, but the need for loading diagnostic programs as well as microcode presented a problem. So in 1973, IBM developed a cheap disk and drive that provided the random-access speed needed for diagnostic-program loading. This low-cost, flexible disk gave IBM an economical random-access program-loading device. And once such a device was available, it was easy to add a write capability for data storage. Semiconductor technology and the IBM 370 had set the stage for the floppy disk, the data-storage medium that helped launch the small-computer revolution.

Newer microprocessors can make use of virtual storage only with the faster access speeds offered by hard disks.

The revolution, however, was spearheaded not by IBM but by independent manufacturers of floppy disks such as Shugart Associates and Memorex, who saw the value of low-cost, random-access storage for smaller computers. By 1975, 27 independent suppliers were producing 8-inch floppy-disk drives.

The new medium for storage offered potent advantages. As

About the Author
Larry Sarisky is the vice-president of sales and marketing for Syquest Technology. He has more than 12 years' experience in marketing data-storage products.

www.americanradiohistory.com

STEP UP TO BETTER PERFORMANCE!

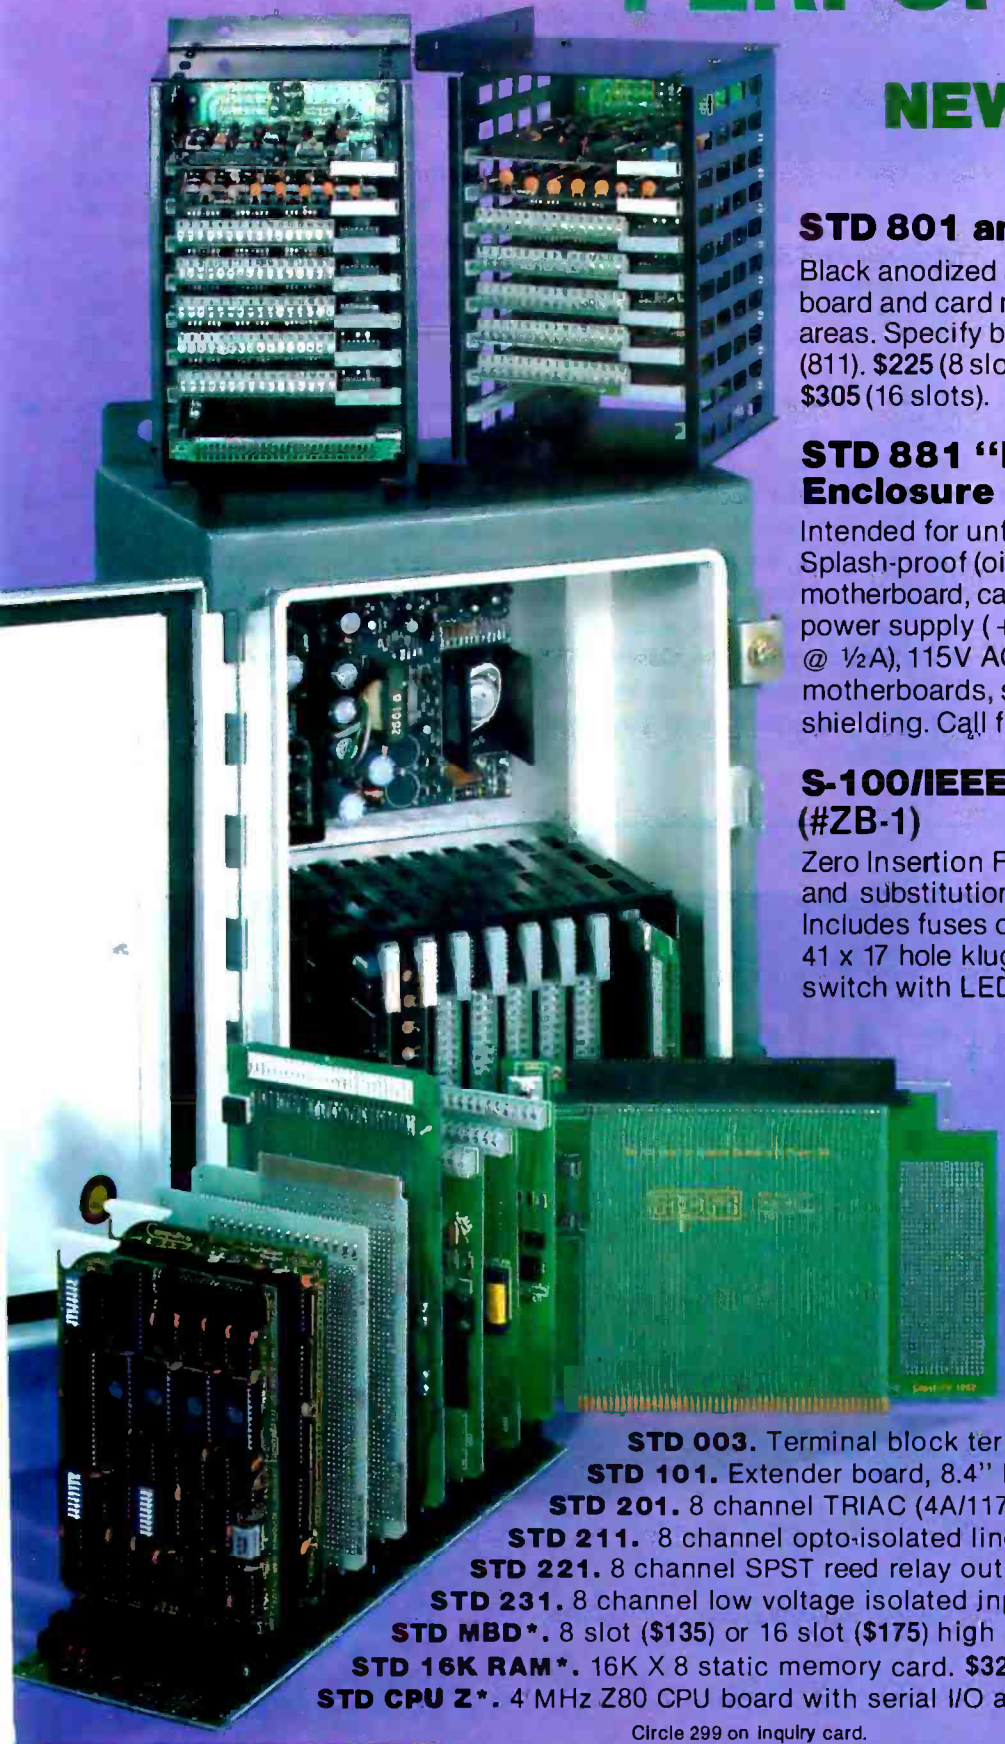

NEW PRODUCTS
(qty. 1-3 prices)

STD 801 and 811 Card Cages
Black anodized aluminum card cages, with mother-board and card retainer bar for use in high vibration areas. Specify bottom mount (801) or back mount (811). **$225** (8 slot motherboard), **$265** (12 slots), **$305** (16 slots).

STD 881 "NEMA 12" Computer Enclosure
Intended for unfriendly industrial environments. Splash-proof (oil and dust tight) box includes 8 slot motherboard, card cage, card retainer bar, switching power supply (+5V @ 6A, +12V @ 1A, −12V @ ½A), 115V AC input. **$595.** Options: 12 and 16 slot motherboards, stainless steel enclosure, EMI/RFI shielding. Call for quote on options.

S-100/IEEE 696 ZIF Extender Board (#ZB-1)
Zero Insertion Force greatly simplifies board testing and substitution. 3000+ insertion/extraction cycles. Includes fuses on +8V and ±16V lines, ground post, 41 x 17 hole kluge area (0.1" grid), and power-to-board switch with LED indicator. **$159**

STD BUS COMPONENTS
(qty. 1-3 prices)

STD 001. Flat cable terminated prototyping board. **$49**
STD 002. Dual 18 edge connector terminated prototyping board. **$54**
STD 003. Terminal block terminated prototyping board. **$59**
STD 101. Extender board, 8.4" long. **$59**
STD 201. 8 channel TRIAC (4A/117V) output board. **$229**
STD 211. 8 channel opto-isolated line voltage input board. **$194**
STD 221. 8 channel SPST reed relay output board. **$169**
STD 231. 8 channel low voltage isolated input board. **$194**
STD MBD*. 8 slot (**$135**) or 16 slot (**$175**) high speed motherboard.
STD 16K RAM*. 16K X 8 static memory card. **$325**
STD CPU Z*. 4 MHz Z80 CPU board with serial I/O and sockets for 8K of RAM/ROM. **$335**

Circle 299 on inquiry card.

MCPI

For more information, call **Mullen Computer Products** at (415) 783-2866 or write MCP Inc., Box 6214, Hayward, CA 94544.

*OEM products manufactured by **CompuPro** division of Godbout Electronics; distributed via MCP Inc., a Godbout affiliate.

www.americanradiohistory.com

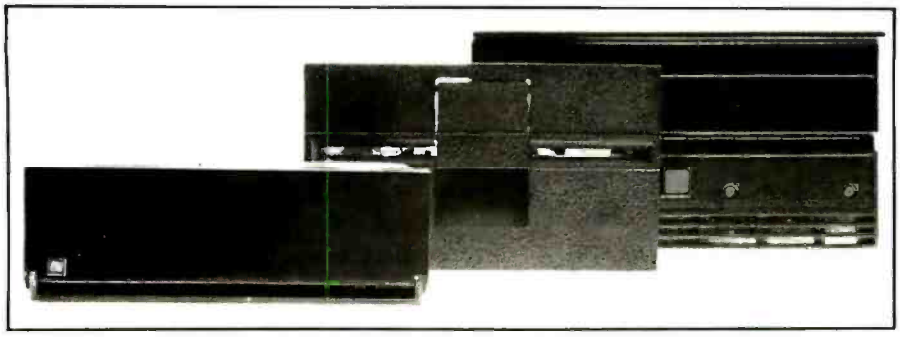

Photo 1: *A size comparison of the 3.9-inch removable hard-disk cartridge drive with standard 5¼- and 8-inch floppy-disk drives. The cartridge drive is 1.625 by 4.8 by 8 inches.*

Business Week reported in a May 17, 1976, article, "Each standard disk (floppy) has the data-storage capacity of 3000 punched cards. The disks are also reusable, easier to store and mail, and inexpensive." The article also predicted that "a new market segment is opening up thanks to the development of the cheapest of computers—the microprocessor or computer-on-a-chip."

As these prophetic words were written, Shugart Associates was developing a lower-cost 5¼-inch flexible-disk drive. It was this drive that signaled the decline of cassette tape. The 5¼-inch floppy-disk drives and media cost less than comparable cassette-based storage. They offered an average access time of about half a second compared to the cassette's 20 seconds. And their error rate was two orders of magnitude better than that of cassettes.

The Winchester Disk

While lower-cost 5¼-inch floppy disks gained most of the attention in 1976, Memorex saw another IBM-developed storage technology that could be used in small computers. Its Model 601 hard disk was the first small Winchester system to be available from a source other than IBM. By protecting the read/write heads and disk platters in a sealed environment, the Winchester could deliver higher data-storage capacities, faster access, and greater reliability at a lower cost per byte. While the 601's disk diameter was a hefty 14 inches, successive Winchester-technology disk drives reduced it to 8 inches and then 5¼ inches.

The history of disk storage has been a tale of increasing compactness. The first 14-inch Winchester-type drives paralleled established storage-module devices. The 8-inch Winchester followed the 8-inch floppy disk. The 5¼-inch drive was compatible in size with its corresponding

It's not Magic, it's NEC.

NEC distributors pull miracles out of a thimble.

NEC Spinwriters.™ Their supernatural reliability and versatility have made them the world's most popular letter-quality printers. Here are some of the miracles they can perform for you.

The Spinwriters' rapidly growing catalog of print thimbles give you incredible versatility. One NEC thimble can print in 35 different languages. Another has complete technical and mathematical symbols. Another a full scientific symbol font. The thimbles snap in and out in seconds. And they each last for more than 30 million impressions.

Of all printer companies, *only* NEC designs and manufactures its own comprehensive family of forms handlers. We've got eight of them, enough to handle any form you can conjure up. They're all user-changeable, too.

Spinwriters have remarkable reliability, more than two years between failures in normal usage. And they need no preventive maintenance or routine lubrication. Ever. With only 3 major spares, mean time to repair is only 15 minutes.

The NEC Spinwriters. Reliable, quiet, compact, flexible and easy to use. For more information on NEC Spinwriters, or to find out how to become an NEC distributor yourself, contact the authorized NEC distributor nearest you.

Spinwriter is a trademark of Nippon Electric Co., Ltd.

NEC

NEC Information Systems, Inc.

www.americanradiohistory.com

floppy disk. And, finally, the 3.9-inch hard-disk cartridge (see photo 1) parallels the newer "microfloppies."

The Need for Better Disks

The development of 16-bit processors, more complex operating systems, and multiuser, multitasking configurations has increased the need for hard-disk capacity, reliability, and speed. Newer processors can make use of virtual storage only with the faster access speeds of hard disks. Operating systems such as Unix have a large assortment of utilities that won't fit on a floppy. To perform multiple tasks for multiple users, systems required the capacity and access speed available only from hard disks.

Microcomputer applications are becoming far more sophisticated. A business accounting system can require a box of 10 floppy disks. A high-resolution digitizing camera may need more than a megabyte of data storage for a single picture. Database-management systems, computer graphics, English-language-based programming, extensive menus, and broad-based application packages all require faster access to a larger amount of data than a single floppy disk can hold.

If a fixed disk crashes, it can be replaced only by a factory technician.

The Limitations of Fixed Disks

While fixed-disk Winchester drives are suitable for many applications, they present severe integration problems for smaller computer systems that now use one or two 5¼-inch floppy-disk drives. The 14-inch drive is simply too big and too heavy to be integrated into many existing systems. It also requires a more sophisticated interface and both AC and DC power-supply voltages.

The smaller 5¼- and 8-inch Winchester drives have proved to be more practical for small systems, but they are no panacea. Although they're smaller than the 14-inch drives, they still may be too large for some systems. Why? Because most systems have required both removable and fixed media. If the current system has been designed for one or two 5¼-inch floppy disks, there may not be room to add a fixed-disk drive.

The user must also worry about the possibility of a fixed-disk failure. If the fixed disk crashes, it can be replaced only by a trained technician. Even worse, data may be lost forever. For this reason, most users back up important programs and files on floppy disks or tape. Unfortunately, the floppy disk is often inadequate for backup. Small Winchester drives have capacities that range from 5 to 80 megabytes. Backing up that much storage on floppy disks is inconvenient and slow. And although tape can be used for backup, it lacks the random access, reliability, and serviceability of disk storage.

ALABAMA
W.A. Brown Instruments, Inc.
(205) 883-8660
Hall-Mark Electronics Corp.
(205) 837-8700
Huntsville, AL

ALASKA
Transalaska Data Sys., Inc.
Anchorage, AK
(907) 276-5616

ARIZONA
Hall-Mark Electronics Corp.
(602) 243-6601
International Data Systems
(602) 231-0888
Phoenix, AZ
The Phoenix Group, Inc.
Tempe, AZ
(602) 894-9247
Spirit Electronics
Scottsdale, AZ
(602) 998-1533

CALIFORNIA
Byte Industries
(415) 783-8272
ComputerLand Corp.
(415) 487-5000
Hayward, CA
Consolidated Data Terminals
Oakland, CA
(415) 638-1222
Data Systems Marketing
San Diego, CA
(619) 560-9222
Eakins Associates, Inc.
Mountain View, CA
(415) 969-4533
Electronic Mktg. Specialists
Tustin, CA
(714) 832-9920
Electronic Mktg. Specialists
Sunnyvale, CA
(408) 245-9291
Electronic Mktg. Specialists
Reseda, CA
(213) 708-2055
Electronic Mktg. Specialists
San Diego, CA
(619) 560-5133
Emerson Enterprises
San Ramon, CA
(415) 837-8728
Hall-Mark Electronics Corp.
Sunnyvale, CA
(408) 773-9990
Hall-Mark Electronics Corp.
San Diego, CA
(619) 268-1201
Leasametric
Foster City, CA
(415) 574-4441
Leasametric
Culver City, CA
(213) 670-0461
Micro Business World
Tarzana, CA
(213) 996-2252
RC Data, Inc.
San Jose, CA
(408) 946-3800
Renaissance Tech. Corp.
Concord, CA
(415) 676-5757
Terminal Rentals, Inc.
Tustin, CA
(714) 832-2414
Terminal Rentals, Inc.
San Jose, CA
(408) 292-9915
United States Data Systems
San Mateo, CA
(415) 572-6600
Vitek
San Marcos, CA
(714) 744-8305
Waybern Corp.
Garden Grove, CA
(714) 554-4520
Western Microtechnology
Cupertino, CA
(408) 725-1662

COLORADO
Acorn Data Products
Englewood, CO
(303) 779-6644
Data Design & Development
(303) 296-3807
Hall-Mark Electronics Corp.
(303) 934-3111
Denver, CO

FLORIDA
W.A. Brown Instruments, Inc.
Orlando, FL
(305) 425-5505
W.A. Brown Instruments, Inc.
Fort Lauderdale, FL
(305) 776-4800
W.A. Brown Instruments, Inc.
Melbourne, FL
(305) 723-0766
W.A. Brown Instruments, Inc.
Tampa, FL
(813) 985-0394
Cain & Bultman, Inc.
Jacksonville, FL
(904) 356-4812
Hall-Mark Electronics Corp.
Fort Lauderdale, FL
(305) 971-9280
Hall-Mark Electronics Corp.
Orlando, FL
(305) 855-4020
Hall-Mark Electronics Corp.
St. Petersburg, FL
(813) 576-8691

GEORGIA
W.A. Brown Instruments, Inc.
Atlanta, GA
(404) 455-1035
Digital Solutions, Inc.
Marietta, GA
(404) 955-4488
Hall-Mark Electronics Corp.
Norcross, GA
(404) 447-8000

HAWAII
Gray Associates
Kailua, HI
(808) 261-3751

ILLINOIS
Dytec/Central, Inc.
Arlington Heights, IL
(312) 394-3380
Hall-Mark Electronics Corp.
Bensenville, IL
(312) 860-3800

www.americanradiohistory.com

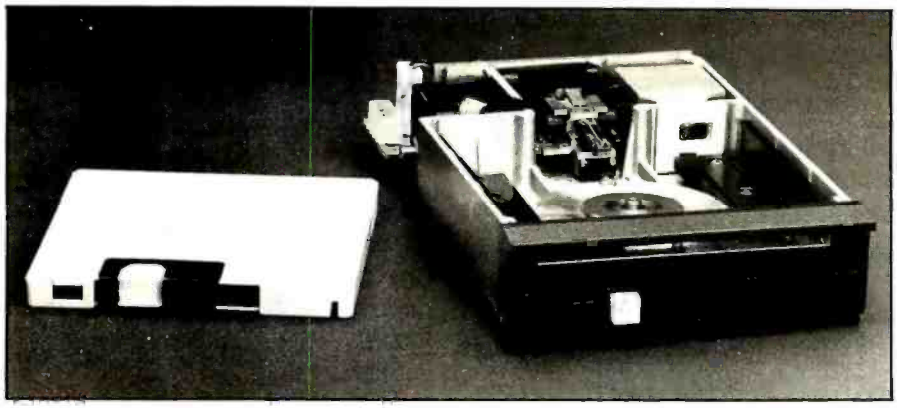

Photo 2: *Syquest Technology SQ-306 removable-cartridge hard-disk drive. The cartridge (shown at left) is inserted into the drive unit, shown with its top cover and drive door removed.*

In spite of these limitations, small hard-disk drives have become the hottest products in data storage. Almost every computer manufacturer now offers Winchester hard-disk storage, as either a standard system component or an option. Why, then, are floppy disks still needed? Because, until recently, they enjoyed two critical advantages over hard disks: they were removable and cheap.

The Hard-Disk Cartridge

Floppy disks can no longer inherently claim those advantages over hard disks, following the development of a new generation of removable, pocket-sized hard-disk cartridges and drives such as the Syquest SQ-306. Cartridges can be replaced when they're full, and, like floppy disks, they can be transported from one computer to another (see photo 2). [**Editor's Note:** *The Syquest removable-cartridge hard-disk drive is not a Winchester drive because the read/write heads are not permanently sealed with the disk, as is the case in true Winchester technology . . .* **R. S. S.**]

But not all hard-disk cartridges can compete with the floppy disk. Cartridge drives are now available in three sizes: 3.9, 5¼, and 8 inches. All three sizes share the same basic technology, but their prices differ significantly. Eight-inch cartridge drives cost $1500 or more. The smaller 5¼-inch drives cost more than $1000. The still smaller 3.9-inch drives cost less than $800. Smaller cartridges also cost less. The 8-inch cartridge can cost more than $100, the 5¼-inch about $50, and the 3.9-inch about $35.

Although all three sizes are gaining acceptance, many industry analysts believe that only the 3.9-inch hard-disk cartridge is inexpensive enough to compete with floppy-disk drives

Information Systems, Inc.
Arlington Heights, IL
(312) 228-5480

Kaltronics
Northbrook, IL
(312) 291-1220

Nabih's, Inc.
Evanston, IL
(312) 869-6140

Tek-Aids Industries, Inc.
Arlington Heights, IL
(312) 870-7400

INDIANA

Dytec/Central, Inc.
Indianapolis, IN
(317) 247-1316

General Microcomputer
South Bend, IN
(219) 277-4972

Graham Elec. Supply, Inc.
Indianapolis, IN
(317) 634-8202

Star-Tronic Distributor Co.
Carmel, IN
(317) 844-0102

IOWA

Dytec/Central, Inc.
(319) 363-9377

KANSAS

Hall-Mark Electronics Corp.
Lenexa, KS
(913) 888-4747

Inland Associates, Inc.
Olathe, KS
(913) 764-7977

LOUISIANA

W.A. Brown Instruments, Inc.
Mandeville, LA
(504) 626-9701

MARYLAND

Bartlett Associates, Inc.
Bethesda, MD
(301) 656-3061

Hall-Mark Electronics Corp.
Baltimore, MD
(301) 796-9300

M/A-Com Alanthus
(301) 770-1150

Micro Distributors, Inc.
(800) 638-6621
Rockville, MD

The Zamoiski Co.
Baltimore, MD
(301) 644-2900

MASSACHUSETTS

Bartlett Associates, Inc.
Framingham, MA
(617) 879-7530

The Computer Store, Inc.
Sudbury, MA
(617) 879-3700

Continental Resources, Inc.
Bedford, MA
(617) 275-0850

CPU Computer Corp.
Charlestown, MA
(617) 242-3350

Microamerica Distr. Co., Inc.
Needham, MA
(617) 449-5807

Simsim, Inc.
Natick, MA
(617) 655-6415

MICHIGAN

General Data Company, Inc.
Brighton, MI
(313) 227-3046

Star-Tronic Distributor Co.
Farmington Hills, MI
(313) 477-7586

WKM Associates, Inc.
Madison Heights, MI
(313) 588-2300

MINNESOTA

Hall-Mark Electronics Corp.
Bloomington, MN
(612) 854-3223

Inland Associates, Inc.
Minneapolis, MN
(612) 379-5354

Kaltronics Distributor, Inc.
St. Paul, MN
(612) 293-0385

Team Central, Inc.
Minneapolis, MN
(612) 623-3850

Tele-Terminals, Inc.
Brooklyn Park, MN
(612) 536-6000

MISSOURI

Hall-Mark Electronics Corp.
Maryland Heights, MO
(314) 291-5350

Inland Associates, Inc.
St. Louis, MO
(314) 391-6901

NEW JERSEY

Hall-Mark Electronics Corp.
Cherry Hill, NJ
(609) 424-7300

Hall-Mark Electronics Corp.
Fairfield, NJ
(201) 575-4415

Logon, Inc.
Hackensack, NJ
(201) 646-9222

TransNet Corporation
Union, NJ
(201) 688-7800

WP Periph. & Supply Co., Inc.
Matawan, NJ
(201) 946-4995

NEW YORK

Arrow Electronics
Farmingdale, NY
(516) 694-6800

Bartlett Associates, Inc.
White Plains, NY
(914) 949-6476

The Computer Factory
New York, NY
(212) 687-3000

Erin Computer Distr. Corp.
Farmingdale, NY
(516) 293-4114

Ossmann Computer Tech., Inc.
East Syracuse, NY
(315) 437-6666

Ossmann Computer Tech., Inc.
Rochester, NY
(716) 473-5720

Ossmann Computer Tech., Inc.
Vestal, NY
(607) 785-9947

www.americanradiohistory.com

and media. The drive costs only slightly more than a floppy-disk drive. The cost of a cartridge is comparable to the cost of a box of 10 floppy disks.

This comparison is even more favorable in terms of cost per byte because the hard-disk cartridge supplies far more capacity per unit. While floppy disks can hold up to 1 megabyte of storage before formatting, the 3.9-inch hard disk has an unformatted capacity of 6.38 megabytes. Not only does it carry from 6 to 15 times more data than a floppy disk, it carries it more safely, sealed in a protective cartridge.

While floppy-disk technology has matured and offers few opportunities for enhancement, small hard disks are at the beginning of their product-technology cycle and will have their data storage capacity increased again and again. The cost per megabyte of storage is dropping rapidly.

Like audio- and video-tape cassettes, hard-disk cartridges will be available in a variety of capacities. Syquest, for example, is already developing a cartridge, compatible in size with existing cartridges, that will double capacity to 12.76 megabytes.

Regardless of capacity, these cartridges deliver better performance than floppy disks. Their average access time is 75 milliseconds, or from 1.5 to 3 times faster than floppy disks. The data-transfer rate is even more impressive. In one second, the cartridge drive can transfer 5 megabits, compared to the 5¼-inch disk's ¼ of a megabit. That's 20 times faster.

Cartridge models provide better interchangeability between drives than floppy disks. The cartridge is designed to provide for a minimum of 10,000 insertion/removal cycles (see figure 1). A closed-loop embedded digital servomechanism ensures cartridge interchangeability while allowing variable sectoring. The embedded servo information is recorded on the disk and provides the sector-mark signals and timing information for all read/write operations.

The digital servo system locks the read/write heads over the centerline of the appropriate recording track. More practical than conventional track-following systems, the digital servo leaves both surfaces free for data and provides flexibility in sector formatting. This enables system builders to define the number of bytes per sector to match any format requirement.

The digital servo, helped by onboard microprocessor control and a microstepping head positioner, also speeds data access and improves accuracy. The microstepping positioner steps in increments of 0.9 degrees rather than the conventional 1.8 degrees. The drive's microprocessor reads servo information, corrects for track alignment, and adjusts the stepper within 100 microinches, all at 60 times a second.

The 3.9-inch disk drives mount almost anywhere—under a keyboard or in a terminal. Two hard-disk drives can occupy one conventional 5¼-inch floppy space. The drives are

www.americanradiohistory.com

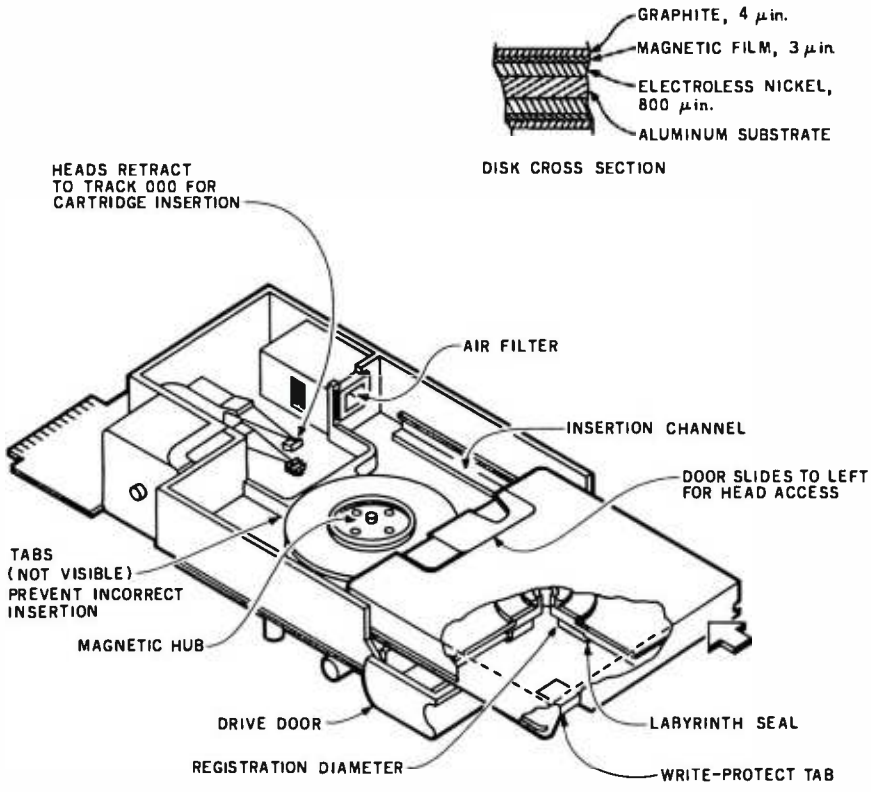

Figure 1: *As a cartridge is inserted into the hard-disk drive, the cartridge door slides open to allow access to the read/write heads, which were previously retracted to track 000. The disk is seated onto the drive spindle by a metal scroll on the cartridge (not visible in the figure) and then secured by a magnetic hub. Tabs on the drive base ensure that the cartridge is inserted correctly and that the cartridge door is open. A cross section of the hard disk illustrates the layers of materials on the disk (not drawn to scale).*

only 1.625 inches high, 4.8 inches wide, and 8 inches deep. Their rugged design enables them to be used in portable systems.

Easy Integration

The 3.9-inch cartridge has the same pinouts, timing, data-transfer rates, and track/sector formatting as industry-standard 5¼-inch fixed-disk Winchester drives. This compatibility allows the use of standard Winchester controllers and interfacing procedures, as well as standard 5¼-inch floppy-disk DC power supplies.

Convenience

Convenience of use is an important factor in the success of the cartridge. The 3.9-inch cartridge is a more convenient size than 8-inch floppy disks or larger cartridges. Just under 4 inches in length and width and less than ½ inch high, it fits in a coat pocket, purse, or briefcase. Its "unbendable" case is easy to handle and safer to mail.

Perhaps more important is the convenience of direct access to more data. The user can retrieve data from a larger online database without inserting and removing many floppy disks. This is especially important in such applications as accounting, inventory control, database searches, and so on.

The thin-film-plating technique used on 3.9-inch hard disks eliminates the need for an initial purge cycle, which with conventional disks can take several minutes.

Thin-Film Plating

The 3.9-inch hard-disk cartridge can store more data more reliably and in less room because it uses thin-film plating for the magnetic data-recording layer. While conventional Winchester technology must seal the disks away from dust, smoke, and other contaminants, the cartridge's graphite-coated thin-film metallic alloy needs less protection. This thin-film plating, with a lubricating coating that shields against dirt, allows denser packing of data and protects the disk from "head crashes."

This plating also eliminates the need for an initializing purge cycle. Users do not have to suffer the inconvenience of long waits before beginning operation. (With conventional hard disks, filtered air is first blown over the surface of the disk to remove any possible contaminants. This purge cycle can take several minutes.) The thin-film recording medium provides greater data density, a more consistent recording surface, better magnetic resolution, less susceptibility to contamination, and greater durability than the conventional ferric-oxide recording medium.

Let's take a closer look at these advantages. Thin-film technology increases data density. It increases storage capacity beyond the current limitations of the standard Winchester or floppy disk. While the conventional medium at 20 to 30 microinches of thickness has a maximum density of only 8000 flux reversals per inch, thin film is an order of magnitude thinner and can store more than 20,000 flux reversals per inch. This means simply that thin film can increase data density by 2.5 times. Thin film maintains a more consistent recording surface. The conventional medium is limited by its uneven thickness and a soft surface that can be damaged in the event of a head crash.

Thin film offers higher resolution Expressed as a percentage, the typical disk recording medium has a resolution of 65 percent. In contrast, the metal-film medium has a resolution of 80 percent. (Resolution is defined as the read-back voltage ratio of a signal recorded at twice the normal

www.americanradiohistory.com

Before you bet your software business on an OS, look who's betting on MS-DOS and XENIX.

A waiting market. If you write and sell 16-bit software, MS™-DOS and XENIX™ give you the largest installed base. In fact, over fifty 16-bit manufacturers offer their microcomputers with MS-DOS or XENIX. IBM, Victor, Altos, Wang, Radio Shack, Zenith and Intel, to name just a few. And the list is growing. That means there's a ready and expanding market for your 16-bit applications software.

The UNIX™ connection. XENIX is the multi-user, multi-tasking, UNIX-derived operating system for 16-bit microcomputers. MS-DOS 2.0 is Microsoft's single-user OS. MS-DOS and XENIX share hierarchical file structure and I/O redirection, including simple piping. MS-DOS 2.0 also provides XENIX-compatible system calls. That means there's a migration path for programs written to run under MS-DOS and XENIX. What's more, both MS-DOS and XENIX are supported by Microsoft® languages. Which means you can look to a single supplier for total support.

Comprehensive support. Microsoft offers you a full product support program. Excellent documentation. Plus continual enhancements to both languages and operating systems. Your applications programs can even be listed in Microsoft's growing Source Directory of 16-bit applications packages. Contact us for current software offerings and vendors.

Leadership. Microsoft led the world into the 8-bit microcomputer marketplace with the first BASIC for microcomputers. Now, we're leading it into the 16-bit market with single and multi-user operating systems. Fully supported by Microsoft.

Bet the winner. If you're writing and marketing software in the 16-bit marketplace, MS-DOS and XENIX are setting the standard. In fact, they're the standard operating systems for the world's largest selling 16-bit microcomputer systems. Which means your market is already there... and growing. Contact us for complete information. Before you bet your software on an operating system, look where your market is betting.

BETTER TOOLS FOR MICROCOMPUTERS

MICROSOFT™

MICROSOFT CORPORATION
10700 NORTHUP WAY
BELLEVUE, WASHINGTON 98004

Microsoft is a registered trademark, and MS, XENIX and the Microsoft logo are trademarks of Microsoft Corporation
UNIX is a trademark of Bell Laboratories

www.americanradiohistory.com

recording frequency versus the normal recording-frequency signal.)

Thin film is more durable. Durability, expressed in terms of sensitivity to head impact, is another critical factor. Soft oxide coatings are no match for a read/write head. When a head crashes (contacts the disk's surface), oxide particles are dislodged. These particles can lead to still more crashes or surface damage.

Although it's not as hard as a read/write head, metal film is 1000 times harder than an oxide layer. This greater degree of hardness is measured by the Mohs test, which scales degrees of hardness from 1 to 10. Each increasing degree on the scale represents an order of magnitude increase. A typical read/write head has a Mohs number of 7. The conventional medium has a Mohs number of 2.0 to 2.5. Metal film has a hardness of 5.0 to 5.5.

Thin film is less susceptible to contamination. With the conventional medium, dust particles are attracted and captured by the fluid lubricant used over the ferric-oxide layer. This presents operating problems, especially for oxide media used in Winchester-type disk drives with low-flying heads. In such drives, a purge cycle of one to two minutes is required.

Some manufacturers of thin-film disks add a layer of graphite, quartz, or sapphire above the metal magnetic layer. Depending on the loading force of the heads used with the disk drive, the protective layer can range between 0.025 micron and 0.1 micron. (The heavier the loading force, the thicker the protective layer.) Microdisk of Fremont, California, a sister company to Syquest, adds a 0.1-micron graphite overcoat. The dry lubricant affords extra protection against head crashes and seals the metal substrate to prevent corrosion.

Summary

Floppy disks and drives still cost less than their nonflexible cartridge counterparts, but the cost per byte is comparable. The removable-cartridge user gains online access to more data, faster access speed, greater drive reliability, and better data integrity. These advantages will become even more affordable as hard-disk technology and volume production improve. Users who buy a single cartridge rather than a box of floppy disks will get more for their money. They will have the best of both worlds—the high capacity, performance, and reliability of a fixed rigid disk as well as the removability and low cost of a floppy disk.

The 3.9-inch hard-disk cartridge with thin-film plating offers the floppy-disk user a better storage medium at a competitive price. I predict that just as the floppy disk replaced the punched card and the cassette, so will the cartridge replace the floppy. The cartridge's better cost/performance ratio and convenience for the user will make the floppy disk obsolete.■

Circle 438 on inquiry card.

www.americanradiohistory.com

The 100mm Winchester. Removable. Half Size. Half Price. Full Performance.

It's here. Winchester capacity and performance at half the size, half the price. And yes, available in removable or fixed disc drives.

The SyQuest 100mm (3.9") SQ306 packs five megabytes (formatted) in half the height of a 5¼" Winchester. And when the Q-Pak™ cartridge is full, just slip in another one. It's the best of both worlds—the reliability of Winchester with the transportability of removable cartridges.

A better drive.

SyQuest drives give you a better fit. Mount SyQuest drives almost anywhere. Under a keyboard. In your terminal. Fit two in one minifloppy space. SyQuest drives are only 1.625 inches high, 4.8 inches wide, and 8 inches deep.

Easy integration. The SQ306 has the same pin-outs, timing, data transfer rates, and track/sector formatting as industry-standard 5¼" Winchester drives. Use standard Winchester controllers and interfacing procedures, standard minifloppy DC power supplies.

Better price/performance. SyQuest delivers five megabytes with proven Winchester heads, positioning, brushless motors and air filtration. Buffered seek reduces average seek time to 75 msec. But the cost is half of comparable 5¼" Winchesters.

Q-Pak™—a better cartridge.

Better reliability. Closed-loop servo with imbedded digital servo (**DigiLok™**) ensures cartridge interchangeability while allowing variable sectoring. **Chromaflux™** graphite coated thin film metallic alloy discs protect against contamination. No long purge cycle required.

Available now.

SyQuest is shipping. In 1983 we will deliver more than **250,000** drives. Second sources will be available. So order your evaluation units today. For more product information, circle our readers' service number. For delivery and pricing information, write or call Larry Sarisky, SyQuest Technology.

Circle 409 on Inquiry card.

SyQuest
TECHNOLOGY

47923 Warm Springs Blvd. Fremont, California 94538
415/490-7511 TWX 910-381-7027
Distributed by Hamilton/Avnet (213) 615-3915

It Fits.

www.americanradiohistory.com

www.americanradiohistory.com

Draw attention to yourself.

(Write a program for the IBM Personal Computer.)

Let your imagination take wing.

Think charts. Graphs. Shapes. Images.

Use originality, creativity and color in programs that entertain. Educate. Organize. Analyze. And programs that get down to business.

Maybe you've written software like that. Or perhaps you're thinking about it.

If so, consider this.

You could draw attention to yourself by writing programs *for* the IBM Personal Computer *on* the IBM Personal Computer. Because all our advanced features (see the box at right) make it faster and easier to do so.

Enhanced BASIC already in ROM, for example, has graphics commands already built in.

And if you write a program using our Advanced BASIC, you'll find the DRAW command particularly appealing. It's virtually a separate graphics language *within* a larger language.

Put your visual together with any of the 128 characters and symbols in ROM for a simultaneous, text-and-graphics mix.

Have musical accompaniment as well.

It's easy, because BASIC controls the built-in speaker with a single command.

Utilize the ten, programmable function keys. Try F3 to paint. F4 for lines. F5 for circles. Or F6 for boxes.

IBM PERSONAL COMPUTER SPECIFICATIONS

User Memory
16K-512K bytes*

Microprocessor
16-bit, 8088*

Auxiliary Memory
2 optional internal diskette drives, 5¼", 160K bytes or 320K bytes per diskette

Keyboard
83 keys, 6 ft. cord attaches to system unit*
10 function keys*
10-key numeric pad
Tactile feedback*

Diagnostics
Power-on self testing*
Parity checking*

Display Screen
High-resolution*
80 characters x 25 lines
Upper and lower case
Green phosphor screen*

Operating Systems
DOS, UCSD p-System, CP/M-86†

Languages
BASIC, Pascal, FORTRAN, MACRO Assembler, COBOL

Printer
All-points-addressable graphics capability
Bidirectional*
80 characters/second
18 character styles
9 x 9 character matrix*

Permanent Memory
(ROM) 40 bytes*

Color/Graphics
Text mode:
16 colors*
256 characters and symbols in ROM*
Graphics mode:
4-color resolution: 320h x 200v*
Black & white resolution: 640h x 200v*
Simultaneous graphics & text capability*

Communications
RS-232-C interface
Asynchronous or SDLC protocols
Up to 9600 bits per second

*ADVANCED FEATURES FOR PERSONAL COMPUTERS

Remember that these function keys make your program more "friendly" to the user and, therefore, more appealing to us.

In fact, if you're interested in licensing your software, we could be interested in publishing it.

We could also be interested even if it runs on *another* computer. If we select your software, we'll ask you to adapt it to our system.

So if you think your software is close to picture perfect, consider sending it in.

For information on how to submit your completed program, write: IBM Personal Computer, External Submissions, Dept. 765 PC, Armonk, New York 10504. IBM®

The IBM Personal Computer
A tool for modern times

For more information on where to buy the IBM Personal Computer, call 800-447-4700. In Alaska or Hawaii, 800-447-0890.

†UCSD p-System is a trademark of the Regents of the University of California. CP/M-86 is a trademark of Digital Research, Inc.

Circle 205 on Inquiry card.

www.americanradiohistory.com

The Winchester Odyssey

From Manufacturer to User

A look at drives, OEMs, and the cost of doing business.

Jim Toreson
Xebec
432 Lakeside Dr.
Sunnyvale, CA 94086

Looking at the advertisements for 5¼-inch Winchester drives, the first thing you notice is the substantial difference between the original equipment manufacturer (OEM) prices and the retail prices. What happens to a 5-megabyte drive between the manufacturer's shipping dock and the display floor to cause a price increase from $600 to $3000?

Perhaps the primary reason for the price difference is that the drives advertised for the OEMs are by no means complete and ready to use. It's no accident of advertising photography that you see the drive's interior workings in beautiful detail. The photographer was not hindered by a cabinet or controller board because neither of those items is part of the deal at this stage. Another missing item is the power supply. Before you can use this drive, the OEM must make these additions. The controller poses a particularly difficult problem for the OEM because the original Winchester design omits the data separator, and therefore each OEM must tackle that job.

The high-speed data transfer in Winchesters requires a data separator, which takes the data stored on disk in one-channel modified frequency modulation (MFM) code and separates it into the clock and data channels that the host computer uses in non-return-to-zero code (NRZ). (See the text box on page 126 for a description of the process.) The design of the separator becomes a complex task because of the number of different drives and operating systems in existence. This challenge to the OEM's creativity translates into considerable expense.

Even after the controller, power supply, cables, and cabinet become part of the product, the OEM still has hurdles to overcome before the drive appears on your desk. Meeting the UL (Underwriters Laboratory) and FCC (Federal Communications Commission) testing requirements calls for additional work. The OEM also provides operating-system software, documentation, and customer support after the sale. After determining the cost of each of these steps, the OEM adds a sales markup to the total and you now have a $3000 drive.

Many of these same expenses apply to OEMs who simply act as wholesalers for another manufacturer's drives. They must test and therefore pay for an entire system. To the resulting overhead OEMs then add their general and administrative costs and their own markup when calculating a drive's final price. They send the drives to a distributor, who also adds a markup. If we examine the details of this process by looking at an OEM in action, the reasons for the price difference are more apparent.

Xebec of Sunnyvale, California, produces two Winchester drives, the Xebec/Apple kit and the UP-9705 Universal Winchester Mass Storage Subsystem. Both drives are functionally identical and use a single-board large-scale integration (LSI) controller with automatic error detection and correction, a universal command set, onboard sector buffer, Shugart Associates Standard Interface (SASI), and a data transfer rate of 1 megabyte per second. The company charges $1299 for the Xebec/Apple kit and $1995 for the UP-9705. As I explain

About the Author

Jim Toreson is the president, chairman of the board, and chief executive officer of Xebec, a manufacturer of disk-drive controllers.

www.americanradiohistory.com

The IMS Family

IMS Computer products not only fulfill the requirements of stand alone applications, they are designed to be cost effective, intelligent nodes in a total network environment! Each product fulfills a particular requirement of the network with a conservative functional overlap of the system above and below in the Family Tree.
The IMS family is growing rapidly—keeping pace with technology and the ever increasing needs of industry.

The Ever Expanding IMS Product Line

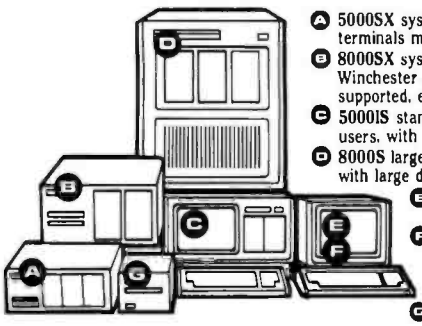

- **A** 5000SX systems computer: S100 based archival node to which six user terminals may be connected, each with its own processor and memory.
- **B** 8000SX systems computer: S100 based archival node with dual floppy, Winchester and tape back up capability. Six user terminals may be supported, each with its own processor and memory.
- **C** 5000IS stand alone intelligent node. S100 based. May support up to four users, with up to 25 MByte Winchester with dual floppies.
- **D** 8000S large system computer. S100 based. Can support up to 16 users with large disk and tape back up capability.
- **E** **Stand-alone intelligent CRT** with high resolution monitor and removable typist keyboard.
- **F** **Expanded CRT** to be used as Intelligent Note Processor. Includes Micro Processor, 64K of memory and four serial ports—two of which are to be used to connect into high speed network communication.
- **G** **Portable cartridge tape back up.** Stores 17.5 MBytes of data. Operates in start/stop or streamer modes.

For complete information and specifications plus the location of your nearby IMS International dealer, call or write today!
(714) 978-6966 or (702) 883-7611

IMS INTERNATIONAL

2800 Lockheed Way
Carson City, NV 89701

Telex: 910-395-6051

We Build Computers As If Your Business Depended On Them.

Circle 207 on Inquiry card.

www.americanradiohistory.com

the differences in these two products, you'll see how OEMs charge back for their costs.

Xebec calls the UP-9705 "universal" because its design incorporates host adapter cards to allow you to operate it with a variety of microcomputers. (For an overview of the link between drive and computer, see "Building a Hard-Disk Interface for an S-100 Bus System" by Andrew C. Cruce and Scott A. Alexander on page 130 of this issue.) Currently these include products from Apple and IBM, along with S-100 bus, Multibus, and Q-bus compatible computers. The advantage of this approach is that it lets the OEM or dealer supply drives for a variety of computers simply by stocking a sufficient number of these universal drives and the adapter cards for each system. The advantage for the user is that once a Winchester system is bought, it can be made compatible with several systems just by purchasing adapter cards. The design can save money for both the dealer and the user in the long run.

To provide this flexibility, Xebec buys each type of computer and hires a programmer already familiar with that computer's operating system to design the adapter card. The completion of the design and the ensuing production of the card does not mean an end to the company's use of the system and the programmer. To keep pace with software corrections and enhancements, Xebec retains both.

The central concept of the Xebec/Apple kit is to reduce the expenses of software support. Although the components in the two drives are identical, Xebec offers this kit with only an Apple II adapter card supporting DOS, CP/M, or Pascal. This difference saves the company and the end user money.

One expense common to both drives occurs during inspection for hard and soft errors at the OEM's facility. Because the bit error rate (or BER, a function of the average number of bits transferred before an error occurs) is a crucial test, drives must be thoroughly use-tested before the company passes them. The drives must average 1 bit error or less for every million bits transferred, and it is apparent that checking this with a statistical sample large enough to ensure validity would be very time consuming. For example, at 5 megabytes per second, such a sample would require nearly three hours of continuous read time for just one data track, not including seek and head-settling time. At that rate, complete testing of a typical drive would take more than 1600 hours or nearly 70 days. Xebec, however, uses *phase margin analysis* to reduce the testing time to under two minutes on one data track and to 48 hours on the entire drive (see the text box on page 128 for a description). This analysis system reduces the company's overhead for this stage of the process, and the cost to the end user is also somewhat less than it would be if the drives were tested conventionally.

In terms of packaging, the Xebec/Apple kit and the UP-9705 differ greatly. The latter uses a compact, custom-made 115-volt/230-volt power supply, FCC- and UL-approved shielded connectors, and a custom-designed cabinet. Not only are the materials costly, but these drives are fully assembled. The kit, on the other hand, has a power supply (same voltage, but not custom-made), cables, a crude cabinet that is packed in a box with the drive, controller, adapter card, accompanying software, and some instructions for assembly. Not only does the company avoid paying wages to an assembler, it also saves money in completely bypassing FCC and UL testing. Certification by these agencies is not possible and therefore not necessary for any device shipped in component parts. The cost of testing, engineering, and producing the additional shielded cables, connectors, and sheet-metal parts required for FCC and UL certification adds considerably to the price you pay for a packaged subsystem.

The biggest difference between the package and the kit is the company's definition of support for each. The end user pays less for the kit because it is shipped directly from the factory and thus avoids the entire distri-

COMPUTER GEAR—WHOLESALE!

Purchase your Hardware and Software directly from an OEM/Systems Integrator. Take advantage of our buying power! We stock a full line of Board Level Components, Software, and Peripherals for all the Popular Machines in use today. These include S-100, GODBOUT, MORROW, APPLE, IBM PC, TRS80, OSBORNE, HP, NORTHSTAR, SUPERBRAIN, NEC, Z/H-89, XEROX, and many others. Call for your needs. We'll give you the Lowest Prices, and the Technical Support and Know-How we are quickly becoming well-known for. Satisfied Customers Nationwide! The Nation's Custom Systems House for Business, Education, Science

SOME OF OUR CURRENT SPECIALS:

MICROSOFT MBASIC 80 $199 ● ASHTON-TATE dBASE II $459 ● SYSTEMS PLUS FMS81 $299
MICROPRO: WORDSTAR $259, SPELLSTAR $159, MAILMERGE $99, PACKAGE-ALL THREE $489

COMPUPRO

Z-80 CPU	$219	INTERF 2	$189
8085/88	$319	INTERF 3	$445
DISK 1	$359	INTERF 4	$269
DISK 2	$599	ENCLOS 2	$669
RAM 16	$439	CP/M 2.2	$149
RAM 17	$399	CP/M 86	$269
INTERF 1	$189	MP/M 816	$769

SYS 816A: $4495 B: $5675 C: $7295

AMO SIN.BO.COMP. $675
VIO-X2 VIDEO BD $319
SD SYS VOB-8024 $459
IBM PC/2DR/MON $3749
SSM VB2 VIDEO $199
PERTEC 5¼" OSDD $125
MORROW MULTI/O $279

MORROW DESIGNS

NEW MICRODECISION COMPLETE COMPUTER (INCLUDES CP/M, WORDSTAR, MBASIC, DISK)
1 DRIVE $945 2 DRIVES $1219
NEW 12" GREEN TERMINAL $499

DJDMA W/CP/M $439 DJ2D W/CP/M $349
64K RAM $429 MULTI I/O $299
HARD DISK SUBSYSTEMS, DRIVES—CALL
DECISION 1 MICROCOMPUTER—CALL

SSM VB3A $399 QUICKCODE $219 QUICKSCREEN $129 SUPERCALC $225
TELEVIDEO TERMINAL SALE: 925 - $749 SANYO 12" GR(HI RES) $209 AMDEK 300G $159
LIMITED SPECIAL: USI 12" AMBER MONITOR-20MHZ (SHARPER THAN SANYO) $199

WE ARE THE LARGEST IN THE CUSTOM CONFIGUARTION OF COMPLETE STATE-OF-THE-ART S-100 SYSTEMS, AT PACKAGE PRICING, WITH INTEGRATION, BURN-IN, & PROGRAMMING.

New: CCT Disk Drive Subsystems. Industrial quality 5¼", 8" floppy and/or hard disk custom configurations. Strictly the highest quality. ONE 5¼" APPLE/IBM: $299 DUAL 8" SSDD: $798 DUAL 8" DSDD: $1188
HD SUPER SPECIAL: 8" QUME/5MEG SHUGART: $1550—W/DMA CONT&CP/M: $1999

Announcing the CCT SUPER SUPPLY: +8V@ 8 to 30A; ±16V to 3A+; +24 V to 10A+; +12V@ 2A+; -5V@ .2A+
A well-engineered, compact supply plugable to handle virtually any Mainframe/Floppy/Hard disk combo Call us.

WE HAVE A LARGE STOCK OF IBM PC SOFTWARE. SPECIAL: MICROSOFT IBM PC 64K RAMCARD — $299!
Micropro—Microsoft—dBase II—Spellguard—Supercalc Call for any CP/M Software—We stock all formats, at big discount!

WOW!$$ SPECIALS $$ GOOD THROUGH MONTH END. As supplies last. Rainchecks may be given if possible Cash Sales Only!

CUSTOM COMPUTER TECHNOLOGY

1 CRAFTSMAN COURT, BOX 4160, SEDONA, ARIZONA, 86340 (602) 282-6299

PRICES & AVAILABILITY SUBJECT TO CHANGE. ALL PRODUCTS NEW, AND CARRY FULL MANUFACTURER'S WARRANTEES
CALL FOR CATALOG. FREE TECHNICAL HELP TO ANYONE. WE CAN CONFIGURE BOARDS & SOFTWARE FOR YOUR SYSTEM
PLUG-IN & GO. AZ RESIDENTS ADD APPLICABLE SALES TAX CP/M.TM DIGITAL RESEARCH

Circle 132 on Inquiry card.

www.americanradiohistory.com

THE COMPLETE COMPUTER. $4995.

Our all-in-one BMC *if* 800 computer is easier for dealers to sell, customers to buy, and OEMs to use in their systems because everything is integrated into a 20-inch wide single desk top unit: computer, keyboard, color graphics, disk drives – even a dot matrix printer!

That's why the BMC *if* 800 is the complete computer. The total system. Study the call-outs and you'll see why.

And that's just the tip of the iceberg. Our 8-bit CPU provides CP/M standard with MP/M with CP/NET as an option. Or you can upgrade to a 16 bit CPU which offers IBM PC compatible MS DOS*, CP/M 86* and much more.

Add to this, custom software, nationwide service and attractive lease flooring and you have a real winner – built by a billion dollar company that's been around for over 100 years.

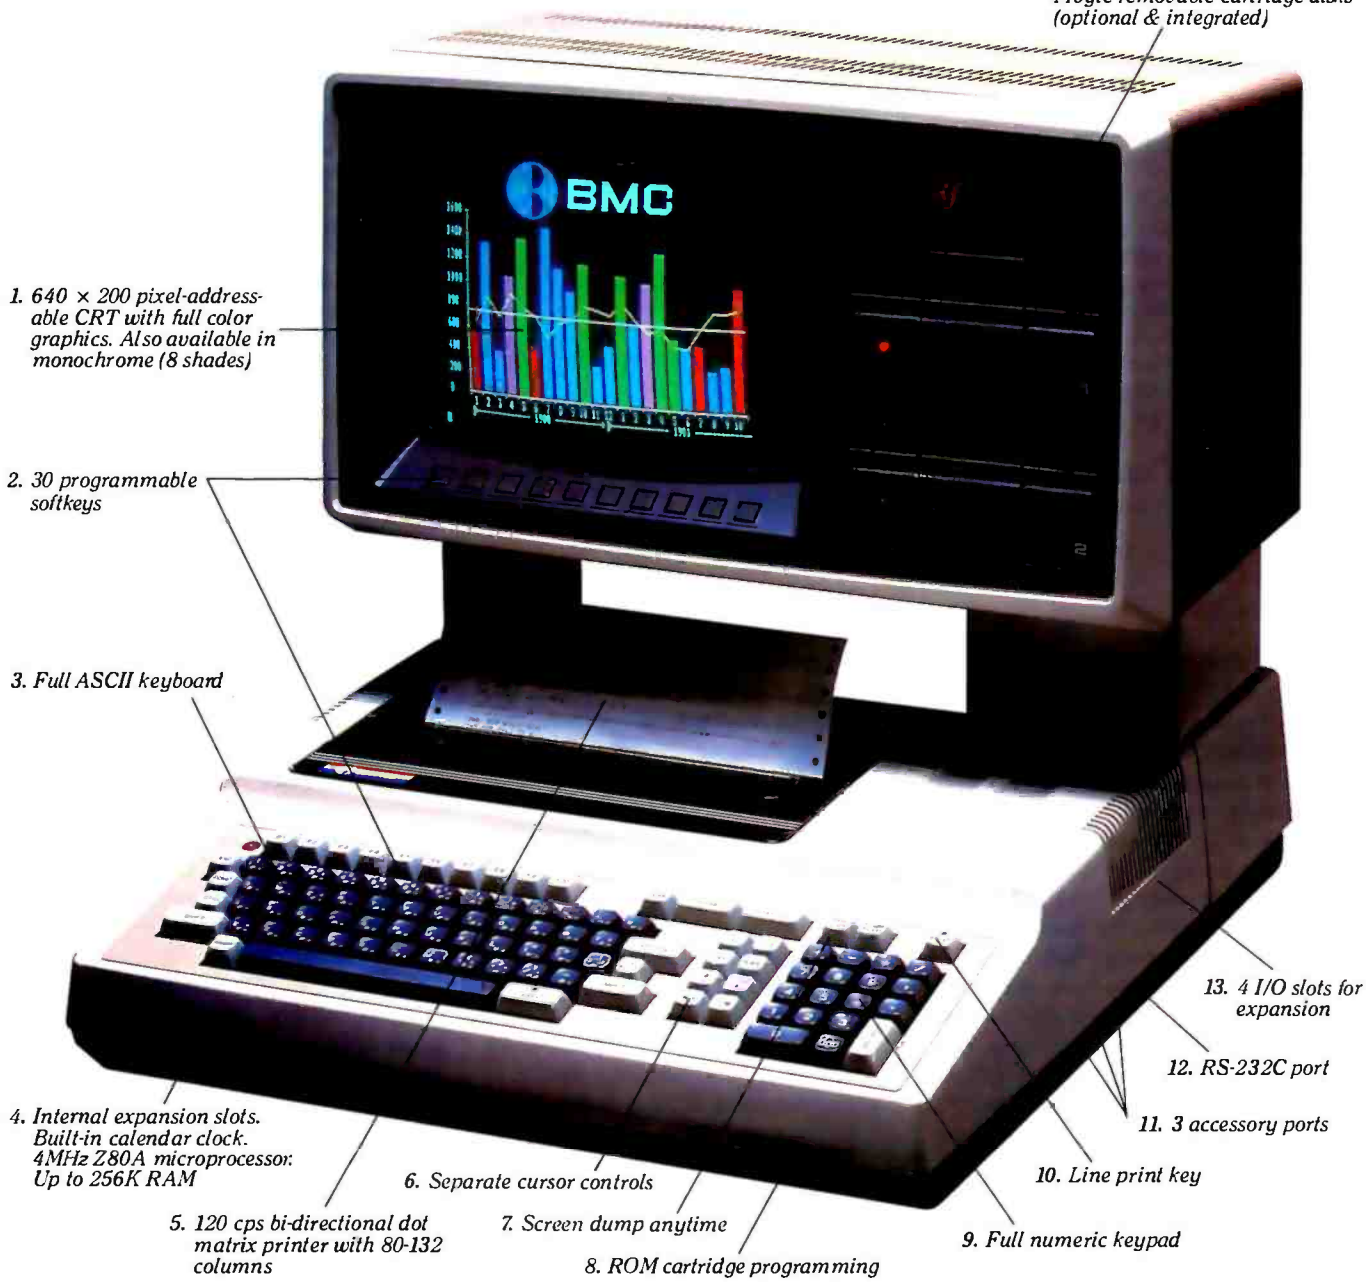

*CP/M and CP/NET are trademarks of Digital Research

Distributed in Canada by Canada Computer (416) 677-7972

BMC SYSTEMS INC.

1900 Avenue of the Stars, Century City, CA 90067
(213) 557-9002 • 1-800-BMC-8003

Circle 59 on Inquiry card.

www.americanradiohistory.com

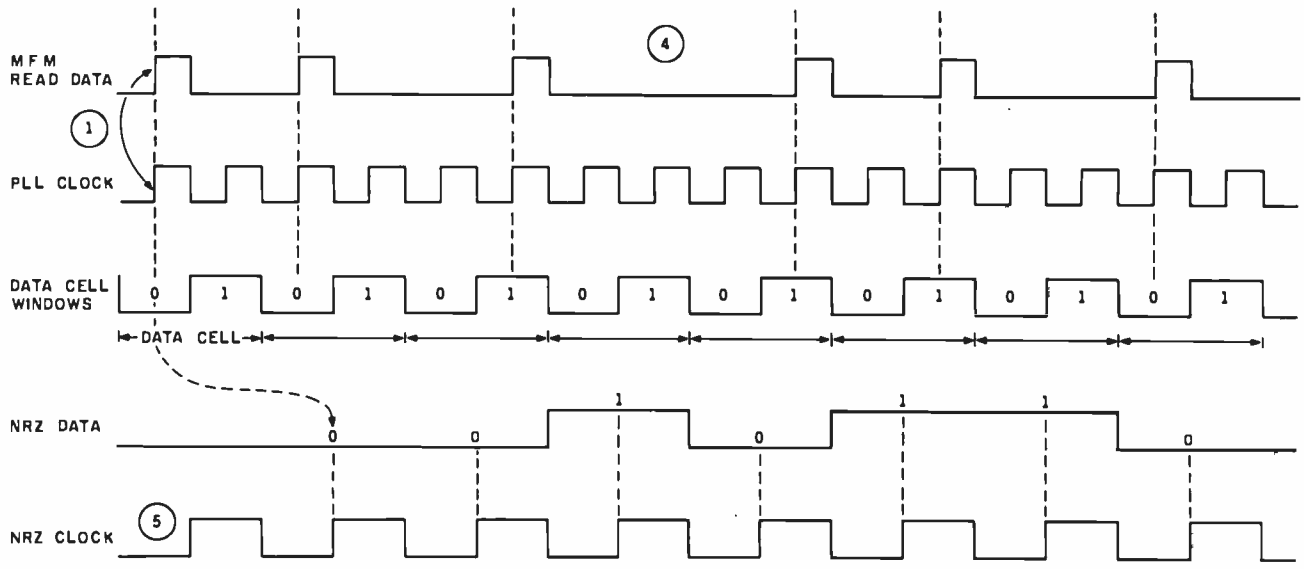

1. MFM read data is phase locked to the PLL clock. The rising edge of data is in phase with the rising edge of clock.
2. The PLL clock generates the data window.
3. If the MFM data pulse occurs in the zero half of the data cell, the NRZ data is zero (0). If the MFM data pulse occurs in the one half of the data cell, the NRZ data is one (1).
4. If no MFM data pulse occurs, the NRZ data is zero.
5. The NRZ clock is a constant-frequency clock generated from the PLL clock. On the rising edge of the NRZ clock, the state of the NRZ data line determines if the data bit is a one or a zero.
6. The NRZ data line changes states only on the trailing edge of the NRZ clock.

Figure 1: *Typical MFM-to-NRZ data recovery. For further information refer to chapter 5 of* Computer Storage Systems and Technology *by Richard E. Matick (Wiley-Interscience, 1977).*

The Data Separator: A Necessary Expense

When 5¼-inch Winchester disk drive manufacturers decided to omit the data separator from their devices, the responsibility for that important piece of design fell to the designers of controllers. Let's now take a look at the role of the data separator in hard-disk data storage.

Bit-shifting during data separation can seriously affect the read/write accuracy or bit error rate (BER) of a Winchester drive that has been integrated with its controller. When data is magnetically stored on the recording surface of the drive, it is translated from the host computer's non-return-to-zero (NRZ) code into modified frequency modulation (MFM) code. The data separator compresses the two channels of information that make up the NRZ code, data and clock, into one channel encoding both. This process is necessary because a magnetic disk stores data as a series of bar magnets along individual tracks in the substrate, thus leaving only a data channel available.

When data is transferred from the disk back to the host computer, the read/write head reads transitions from one magnetic polarity to another. This series of pulses must be separated into the original data and clock channels. The clock is a series of cells with a square voltage peak, found before and after the window area. This area is where the read/write head measures data voltage to determine if the bit is a one or a zero. It is understandably difficult to match the two channels perfectly against each other at five million cycles per second. However, this is exactly what must be done if the data is to be read. (See figure 1.)

Because floppy disks transfer data at a much lower rate, a much larger amount of time is available to transfer each bit. With the increase in time comes an increase in the size of the window, and thus the system has a greater margin for error. Then consider what happens when the entire cell gets down to the 200-nanosecond range, as is the case with Winchester drives. The slightest mismatch of the two channels means that the bits literally go out the data window and the data is unreadable.

The Xebec controller solves this problem by using a phase-locked loop *(PLL) system that locks onto the MFM data pulses and recovers the bit timing from the disk by first picking off the data transitions and converting them into a voltage. Then a voltage controller oscillator uses that voltage to generate a clock frequency that directly correlates to the data transfer rate. Because the clock is customized to fit the data, variations in the speed of movement of the data can be accommodated.*

It should be obvious from this brief account that the design of the data separator is no small task, and for this reason it contributes considerably to the end cost of a disk drive subsystem.

www.americanradiohistory.com

VISUAL presents ergonomic elegance and high performance in a low-cost terminal.

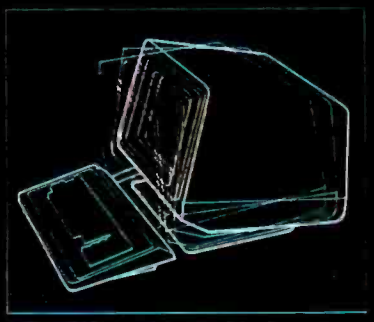

Tilt: 10° forward, 15° backward

Swivel: 270°

$695 list

FEATURE COMPARISON CHART

FEATURE	VISUAL 50	Hazeltine Esprit	ADDS Viewpoint	Lear Siegler ADM-5	TeleVideo® 910
Tilt and Swivel	YES	NO	NO	NO	NO
Detached Keyboard	YES	NO	YES	NO	NO
N-Key Rollover	YES	NO	YES	NO	NO
Audible Key Click	YES	YES	NO	NO	NO
Menu Set-Up Mode	YES	NO	NO	NO	NO
Status Line	YES	NO	NO	NO	NO
Full 5 Attribute Selection	YES	NO	NO	NO	YES
Smooth Scroll	YES	NO	NO	NO	NO
Line Drawing Character Set	YES	NO	NO	NO	NO
Block Mode	YES	YES	NO	NO	YES
Insert/Delete Line	YES	YES	NO	NO	YES
Bi-Directional Aux Port	YES	YES	NO	YES	NO
Columnar Tabbing	YES	YES	NO	NO	YES
Independent RCV/TX Rates	YES	NO	NO	NO	NO
Answerback User Programmable	YES	NO	NO	OPT.	NO

The VISUAL 50 represents a new approach in low cost terminals. Although it costs drastically less, it offers the features you expect from the high priced units.

For example, the VISUAL 50 enclosure is ergonomically designed in light weight plastic and can easily be swiveled and tilted for maximum operator comfort. A detached keyboard, smooth scroll, large 7 × 9 dot matrix characters and non-glare screen are a few of the many human engineering features normally offered only on much higher priced terminals.

Another distinctive feature of the VISUAL 50 is its emulation capability. VISUAL 50 is code-for-code compatible with the Hazeltine Esprit,™ ADDS Viewpoint,™ Lear Siegler ADM-3A™ and DEC VT-52.® Menu driven set-up modes in non-volatile memory allow easy selection of terminal parameters.

And you're not limited to mere emulation. As the chart shows, the VISUAL 50 has features and versatility the older, less powerful low cost terminals simply cannot match.

The price of the VISUAL 50? Only $695 list. Call or write for full details on the latest in the industry's finest line of video terminals.

Service available in principal cities through Sorbus Service, Division of Management Assistance, Inc.

VISUAL **See for yourself**

Visual Technology Incorporated
540 Main Street, Tewksbury, MA 01876
Telephone (617) 851-5000. Telex 951-539

Circle 445 on Inquiry card.

www.americanradiohistory.com

butor/dealer network and its markups. The kit comes with a standard 90-day warranty, and the user must return defective drives to the factory, where they are repaired and returned within 30 days. With the package, the user can opt for a maintenance contract that provides a replacement drive within 24 hours if a drive needs repair. Additionally, the buyer of the UP-9705 can take advantage of company-provided training, full documentation, manuals, and a phone service for questions. Direct sales staff and after-sale support are two other services that Xebec provides for the packaged system.

To keep the expenses of the kit to a minimum, Xebec is experimenting with a variety of low-cost support activities. A newsletter will provide kit owners with a place to exchange information, ideas, and solutions to problems. Company representatives will attend Apple trade shows not to answer questions but to encourage kit owners to form users' groups. Where the kit is concerned, Xebec's goal is to avoid answering questions on the phone, debugging applications programs, and holding the hands of inexperienced users. If the company can avoid providing that support, the kit remains a less costly alternative for hobbyists and others who eschew the frills.

As you can see, the cost of providing the end user with a functioning drive is a factor of the cost incurred by the OEM. In our case, we have chosen to provide our customers with two options: a bare-bones kit with little in the way of after-sale support, and an assembled and tested package with several support services included. Which product the user buys will depend on his needs. The price difference is substantial but is an accurate reflection of the differences in our costs for producing the two systems.■

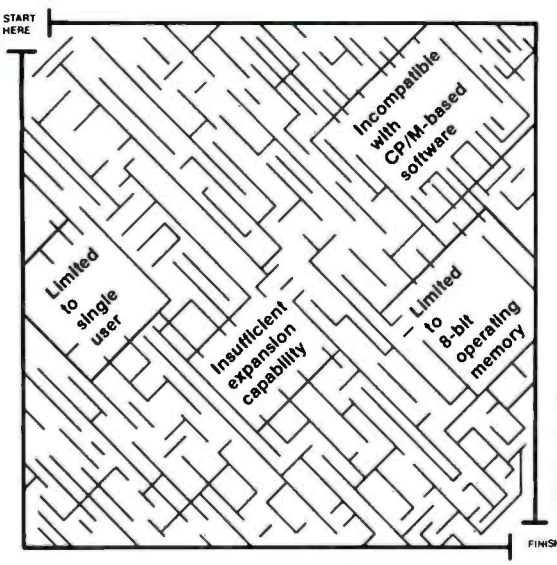

The Microcomputer Maze

The Pragmatic Solution

PROBLEM: Confusion caused by growing number of computer companies promising solutions to industrial and scientific problems.

SOLUTION: since 1978 Pragmatic has integrated systems based on a powerful combination of hardware and software spanning from single to multi-user operation and running BOTH 8 and 16 bit software.

RESULT: a solution that solves your problem NOW and anticipates your future computing requirements.

The Pragmatic solution runs CP/M, CP/M 86, 26, and MP/M compatible software. All systems include Wordstar™ for word processing, SuperCalc-86™ for business and financial planning and Ashton-Tate's dBase II™ for data base management.

The Pragmatic solution gets you through the microcomputing maze with complete solutions for today and tomorrow. Sound Good? Call Jerry Hall for the Pragmatic representative nearest you.

pragmatic designs INC.

Pragmatic Designs, Inc. 950 Benicia Avenue Sunnyvale, CA. 94086

(408) 736-8670 TLX: 171627

CompuPro®

Pragmatic Designs is an authorized CompuPro Systems Center.

Trademarks: Wordstar of MicroPro. SuperCalc of Sorcim, dBase II of Ashton Tate. CP/M of Digital Research, CompuPro of Godbout Electronics.

Testing the Bit Error Rate

The difficulty facing anyone who wants to test a Winchester drive is that the bit error rate (BER) is so low that it is hard to determine what a valid statistical sample size should be. Xebec uses a technique called phase margin analysis *to handle this problem.*

The size of the data window and the position of the data in the window are important factors in the BER. Phase margin analysis artificially reduces the width of the data window and then counts the number of bits that fall outside this boundary. With this approach, the BER climbs enough to make analysis of the drive's reliability easier and faster. The increased BER gives us a sample of significant events statistically large enough to make accurate predictions about the drive's reliability.

By using this method, we measure both actual errors and near misses. We don't attempt to predict the BER from analog measurements of signal-to-noise ratio or from maximum peak shift. Our experience shows that the artificially high BERs correlate reliably with actual BERs when the drive is in actual operation. By using this system, we also reduce the time needed to test a Winchester disk subsystem from 70 days to 48 hours.

Circle 351 on inquiry card.

www.americanradiohistory.com

WOW!

Look what Saturn Systems has come up with! A multi-function board for the IBM PC with everything but the kitchen sink. No need to clutter up all your slots with assorted boards — this one does it all! You get:

1. 64K bytes of RAM, with expansion sockets for up to 576K
2. Hard disk interface (SASI host adapter)
3. *Two* serial ports (COM1 and COM2)
4. Real time calendar/clock with battery back-up
5. Parallel printer port (LPT1, LPT2, or LPT3)

And, as soon as you open the box you'll find everything you need to put your board to work immediately. Saturn's software packages include:

1. Print spooler to let you keep using the computer while the printer is running.
2. Hard disk support for current level of PCDOS.
3. PSEUDO-DISK™ software to simulate a very fast disk drive (even faster than a hard disk!)
4. Real time clock support, so you never have to type in the date and time.

All this for only $795! Get the most out of your IBM PC. Ask for the Saturn multi-function board at your local dealer. (Larger memory models also available.)*64K internal RAM and 1 disk drive required.

SATURN SYSTEMS INC.

P.O. Box 8050
Ann Arbor, MI 48107
(313) 973-8422

Circle 488 on Inquiry card.

www.americanradiohistory.com

Building a Hard-Disk Interface for an S-100 Bus System

Part 1: Introduction

How a Winchester disk drive and disk controller work, and what is needed to connect them to the S-100 bus and the CP/M operating system.

Andrew C. Cruce and Scott A. Alexander
ASC Associates Inc.
POB 615
Lexington Park, MD 20653

The development and availability of inexpensive, high-performance Winchester-technology disk drives offers us the opportunity to vastly expand the capability of microprocessor-based systems. The fact that these disk systems are both inexpensive and intrinsically highly reliable makes them extremely attractive as add-on devices for existing systems. Over the past several months we at ASC Associates have designed and constructed 5¼-inch Winchester disk subsystems for several microprocessor systems. In this and two subsequent articles we will describe in detail all the hardware and software necessary to integrate a standard, commercially available Winchester disk with an existing S-100-bus, CP/M-based computer system.

In terms of speed increase, a hard disk is to a floppy disk roughly what a floppy disk is to a cassette tape.

This month we'll review the general background information required to understand the following articles. Next month we'll explain the design steps required to interface the disk hardware with the system. In part 3 we will cover the software necessary to make CP/M aware that the disk is on the system, and we will describe the initial integration and debugging process. We intend that at the conclusion of this series you will have sufficient background information to be able to construct and integrate the disk system described in these articles with an S-100, CP/M-based computer system.

Why a Winchester?

The first question you might ask is why go to all the trouble of putting a Winchester disk on a microprocessor system in the first place. The answer is twofold: increased storage capacity and speed. Current state-of-the-art 5¼-inch floppy-disk-drive systems are limited to about 1 megabyte of storage per drive. The smallest Winchester systems, 5¼-inch drives, can today store over 10 megabytes per drive, and these storage capacities are only the beginning. The development of newer-technology thin-film read/write heads is expected to increase capacity by factors of four and more

About the Authors

Andrew Cruce has a Ph.D. in Aeronautical Engineering and has recently received an S.M. degree in management as a Sloan Fellow at MIT. Scott Alexander has an M.S. in Electrical Engineering. Both have extensive design and implementation experience with small computers and are full partners in the firm of ASC Associates, which markets the hardware described in this series of articles.

www.americanradiohistory.com

WHY A FORMS PROCESSING DATABASE?

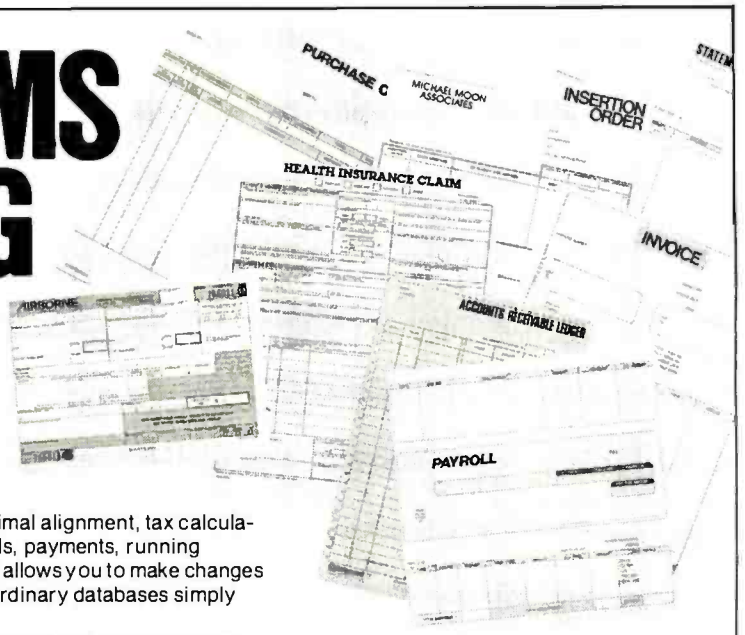

Ever since the introduction of low-cost microcomputers, business professionals have asked for a system that lets office workers use the knowledge they have and the procedures they already understand.

The solution has arrived. VersaForm now provides you and your staff with a natural way to use a computer—a forms processing database system.

THE IDEAL WAY TO USE A COMPUTER

Just about any form in your office can provide a familiar and easily mastered interface to a personal computer. Simply copy a form to the computer screen and you're set.

BUILD YOUR DATABASE WITH ANY OF THESE FORMS

- Bill of Materials
- Client Billing
- Freight Documentation
- Insertion Orders
- Insurance Claims
- Inventory Ledgers
- Invoices
- Job Estimates
- Medical Records
- Personnel Histories
- Project Scheduling
- Purchase Orders

Unlike any other system, VersaForm gets you started on a computer, working the way you're working now . . . you can even use your existing paper forms.

UNIQUELY DESIGNED TO YOUR OFFICE REQUIREMENTS

Most forms have two parts. The form heading contains information that appears only once on each form, like customer name or project number. The transaction region, below, has a variable number of line item entries which might contain quantities, descriptions, unit costs and extensions. These entries require a system that does decimal alignment, tax calculations, subtotals, payments, running balances, and allows you to make changes at any time. Ordinary databases simply can't do it.

All these features and more are yours with VersaForm. A spectacularly useful print formatting capability enhances professional forms management. The magic of print formatting is the ability to produce from a single form in your database, several completely different printed forms. For example, from a patient record you can produce a history chart, an insurance claim, a statement and standard dunning notice.

EVERYDAY BUSINESS FORMS DEMAND A TWO-LEVEL RECORD STRUCTURE... ONLY VERSAFORM HAS IT.



MANAGEMENT REPORTS IN A HURRY

The real power of a forms processing database is evident with VersaForm's reporting facility. You need only point to the data items within a form you want queried, sorted, counted, subtotalled, and totalled. There's no complicated format to enter—VersaForm automatically produces columnar formats, titled, dated and page numbered.

In just minutes, a detail or summary report is automatically produced. What's more, you can run the report again and again without having to re-enter the instructions.

APPLE II/III, HARD DISK, IBM PC DATABASE?

VersaForm supports both floppy and hard disk sub-systems. You can swap data files between different systems through a hard disk-based network. From remote locations data disks can be consolidated into company-wide reports.

OPEN-ENDED SYSTEM.

For special requirements, an optional OEM Pascal Interface provides sophisticated users and software developers with powerful VersaForm tools, allowing direct access to the B-tree indexed database. System integrators can add value by creating templates and writing custom interfaces.

Users say VersaForm is the most powerful and easy to use system around. That's because it's more than just a database; it's a true Business Form Processor.

IBM/PC
VERSION NOW AVAILABLE

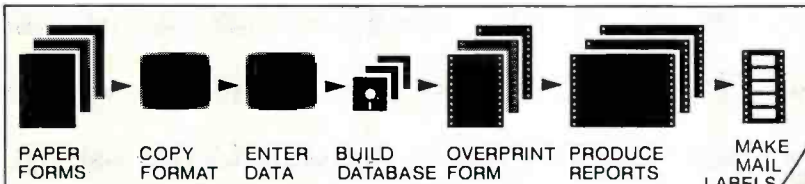

THE ONLY DATABASE THAT COMPLETELY PROCESSES FORMS FROM START TO FINISH.

Dealer and OEM inquiries invited

VersaForm™
Business Form Processor

Applied Software Technology
14125 Capri Drive
Los Gatos, CA 95030
408/370-2662

Circle 30 on Inquiry card.

www.americanradiohistory.com

in the next several years.

The other advantage of a Winchester disk drive is its rapid operation. In terms of speed, a hard disk is to a floppy disk roughly what a floppy disk is to a cassette tape. For a Winchester disk system, maximum seek times (maximum time to find data on the disk) are on the order of 150 to 200 milliseconds (ms) rather than the several seconds associated with many floppy-disk systems. Also, once the data is located, it is transferred at 5 million bits per second, which is much faster than existing floppy-disk systems. At these rates a Winchester system can access data anywhere on the disk and load 64K bytes of information in under 1 second. The low access times, high data-transfer rates, and large storage capacities of Winchester drives allow us to realize the full processing power that is inherent in current microprocessor systems. Winchester drives open new vistas for such applications as large inventory systems, database management systems, and data analysis applications.

What Is a Winchester?

The term Winchester comes not from an inventor's name, but from the code name IBM assigned to the development of the Model 3340 disk memory, which was introduced in 1973. The industry as a whole has borrowed the Winchester name and now generally uses it to describe any disk drive using similar technology. The key element of the Winchester technology is that the head-to-disk assembly (HDA) is sealed from outside air and the disk is generally nonremovable.

In some ways, the Winchester technology is similar to conventional hard-disk drives. As with conventional hard disks, the read/write head floats over the recording medium on an air cushion that keeps the head from contacting the disk. In the case of the Winchester, however, the sealed and extremely clean environment of the HDA permits the disk designer to "fly" the read/write head closer to the disk surface. In typical removable-media hard-disk systems, the read/write head flies 60 to 70 microinches above the disk surface. The limitation on the distance the head flies above the disk is based on the minimum distance the head can fly safely above the disk and not risk contact with dust or any other contaminant on the disk. Any contact of this type causes the head to stop flying and crash on the disk surface. Such a crash normally ruins the read/write head and the surface of the disk medium, results in a complete loss of data, and necessitates an expensive repair job. Sealing the HDA in a Winchester drive provides a substantially cleaner environment than that of removable-media disks and allows the designer to fly the head about 20 microinches over the disk surface. This lower head altitude provides higher magnetic flux densities at the recording surface and thus higher recording densities on the disk.

During read/write/seek operations, the Winchester head flies above the surface of the disk on an air bearing, supported by carefully balanced aerodynamic forces. As the disk starts or stops, the head takes off or lands in a silicone-lubricated landing area. When the disk is not spinning, the head rests on and actually contacts the landing zone on the disk.

Winchester drives have a number of advantages over conventional hard-disk drives. First, they are very low cost both in absolute terms and in terms of cost per bit of storage capacity. In addition, the sealed environment of the HDA produces extremely high reliability with MBTF (mean time between failure) figures quoted in excess of 8000 hours. Winchester disk drives also require no preventive maintenance such as changing air filters or cleaning and aligning heads. This is of particular importance to owners of small, inexpensive computer systems who wish to have the capability associated with removable-media hard disks without the attendant maintenance hassles and expense. The primary disadvantage comes from the fact that the storage medium (the actual disk platter) is not removable. This prevents us from backing up data files in the conven-

INVESTMENT ANALYSIS FROM CENTENNIAL

CENTENNIAL SOFTWARE / 410 17TH ST. SUITE 1375 / DENVER, CO 80202 / (303) 595-9193

STOCK-FOCUS

Find out how low is low and how high is high. Using capital structure and performance data, Stock-focus objectively calculates the underlying value of a stock. The system was first developed by the management science department of a major money center bank, and is now in use by investment advisors, trust companies and brokerage houses. On your screen, Stock-focus will plot an estimate of lowest value, highest value and the current price. You then decide what to buy, sell or hold.

REAL-FOCUS

Exhaustively analyze potential real estate investments using the Wharton School's approach to real estate analysis. In minutes you can project profit, costs, and IRR for any project over a 10 year period. Real-focus accounts for amortization, debt, income, operating expenses, taxes, depreciation, and cash flows for both after-tax holding and the results of sale. With Real-focus you can analyze any potential investment from a single building project to a complex time-phased planned unit development.

THE FOCUS TECHNIQUE

FOCUS is CENTENNIAL SOFTWARE's new approach to Program Architecture, providing a natural interaction between microcomputers and users. It provides worksheet style input screens, free access to all program segments, and the ability to combine individual results files for portfolio analysis. You also receive a usable reference manual, menu helps, a program glossary, multiple report formats and spooling. With our FOCUS technique even the most complex programs are versatile and easy to use.

COMPUTER	MEMORY-K	REAL-FOCUS	STOCK-FOCUS
IBM PC	64	$179.00	$189.00
Apple (plus) II	48	149.00	159.00
TRS-80 I	48	149.00	159.00
TRS-80 II	64	179.00	189.00
TRS-80 III	48	149.00	159.00

ALL PROGRAMS IN DISK BASIC

IBM is a trademark of IBM. Apple is a trademark of Apple Computer Corp., TRS-80 is a trademark of Tandy Corporation

ORDER NOW! FILL IN OR CALL 800-525-2003 (Toll Free)

PROGRAM NAME _____ COMPUTER _____ MEMORY _____

NAME _____ PHONE # _____

ADDRESS _____ ☐ VISA ☐ MasterCard

_____

ACCOUNT # _____ EXP. DATE _____

Circle 75 on inquiry card.

www.americanradiohistory.com

UNSINKABLE PRICES
One Hull of a Deal

SYSCOM II
Faithful to the Core
$725

COMPUTERS

Apple—New models. New prices	$CALL
Atari 800 48K	$535
Chameleon. Compac. Columbia (PC emulators)	$CALL
Commodore 64	Ask for Packagell
Franklin ACE 1000	$955
IBM PC—MANY SYSTEM CONFIGURATIONS	$CALL
Kaypro—portable. 9" CRT. 2 drives. software	$1695
Osborne Double Density	$1725
Slimline S-100: Z-80. CP/M. 64K. 2 MByte drives	Under $2000
Syscom II—Apple II Plus emulator	$725
Syscom II PKG: 48K. Drive w/Controller. 12" Hi-res Green CRT. Z-80 Card. 80 Column Video Card. 16K RAM Card	$1650

FOR APPLE & FRANKLIN

ALS Z-Card	$215
Corvus all items	$BIG DISCOUNT
dBase II (requires CP/M)	$395
Z-80 Card—Applied engineering 1–9 pcs	$175
10+ pcs	$155
Universities, clubs, and dealers welcome.	
Fourth-O—parallel interface. cable	$49
Grappler + (parallel. cable. graphics)	$135
Hayes Micromodem II	$275
Microtek Dumpling O-X—graphics. 0 to 64K buffer	$135
" Extra RAM-16K sets	$20
Hayes Micromodem II	$275
Rana Elite I	$285
Rana Elite II—double	$455
Rana Elite III—quad	$585
8" drive. 2MByte Floppy System	$1695
Omnivision 80 column. with software	$165
Prometheus Expand-a-Ram. up to 128K	$195
Videx Videoterm 80 column	$245
Visicalc 3.3	$179
Vista Quartet (2 drives. thin. 640K. controller)	$655
" Vision-80	$219
" V-1200. 8MB removable cartridge	$1325
" 6MB extra cartridge	$75
VR Data 5MB Hard Disk with error correction	$1575

FOR IBM PC

There is no market more competitive than IBM-PC compatible cards. AST RESEARCH rightfully sells the most. IRONSIDES COMPUTER. recognizing functionality and design regardless of price. endorses AST RESEARCH products as BEST. Beyond all doubt.
AST RESEARCH CARDS NOW INCLUDE SPOOLER AND DISK EMULATOR SOFTWARE — NO EXTRA CHARGE

AST ComboPlus 64K with Parallel. Serial. Clock	$375
AST MegaPlus 64K. expandable to 512K. SPC	$435
Corona 5MB Hard Disk	$1495
Parallel cable	$35
Serial cable	$32
RAM sets. 64k with parity	$65
Tandon TM 100-2 drive—with installation notes	$237

TANDON DRIVES

TM-100-2—5-¼" DOUBLE SIDED	$237
TM-50-2—5-¼" THIN DOUBLE SIDED (STACKS IN PC).	$CALL
TM-648-2—8" DOUBLE SIDED/DOUBLE DENSITY	$435

Chameleon "The Compatible Computer"

- Runs IBM PC & Z-80 software • 128K RAM. expandable to 700K • Dual 320K drives • PC style keyboard • 9" green display. 80 × 25 with graphics • Software: DOS. Perfect Writer. Perfect Calc. Basic • PORTABLE!!!

You must register your order now to receive the introductory price of
$1995

JCS RGB-III

VIDEO MONITORS

• Industrial steel case • 13" CRT • 16 colors on IBM PC • Cable for IBM PC • 630 lines horizontal resolution • Made in Japan with industrial Hitachi CRT • High brightness phosphors • 1 year parts warranty
CUSTOMERS: GET A $50 REBATE FOR BUYING AFTER ARRANGING A DEMO AT YOUR LOCAL COMPUTER STORE.
DEALERS: CALL FOR DETAILS ON DEMO PLAN.

Suggested List	**$595**
Amdek 300G 12" green	$145
Amdek 300A amber	$160
Amdek 310G for IBM	$170
Amdek 310A amber	$180
Amdek Color I	$325
Amdek Color II	$685
BMC 12" Green	$89
Oynax 12" green. 20MHz	$129
Oynax 12" amber. 20MHz	$145
JCS RGB-III (630 lines. 16 colors. PC cable)	$DEMO REBATE
Taxan/JCS 12" green	$135
Taxan/JCS RGB-I	$345



STAR MICRONICS GEMINI 10
$365

PRINTERS

Epson MX-80FT—w/Graphtrax Plus	$485
Epson MX-100—w/Graphtrax Plus	$645
Brother/Comrex—17 cps Daisy	$745
F-10 Starwriter—emulates Diablo	$1190
IDS Microprism 110cps. 80 column. graphics	$529
IDS Prism 80	$850
IDS Prism 132	$1025
NEC 7710-I	$2065
NEC 7730-I for IBM PC	$2095
Okidata uses standard spool type ribbons	
u82A—80 column. 120cps	$395
u83A—132 column. 120cps	$660
u84AP—200cps. 132 column. parallel	$935
u92A—160cps. 80 column	$525
Prowriter/PMC—80 column. 120cps. proportional	$435
Prowriter II—132 column. 120cps	$655
STAR MICRONICS Runs Epson software. 100cps. f/t. graphics. Uses spool ribbons—a likely savings of $100+.	
Gemini 10—80 column. 2k expandable buffer	$365
Gemini 15—132 column	$475

ATARI

Atari 800 48K	$535
Microtek 32k RAM (AT 400/800)—list $139	$105
Percom RFD40-SI (176K)—list $699	$545
" RFD44-SI (352K)—list $845	$685
810 Disk	$450
830 Modem	$159
850 Printer Interface	$165
Printer cable	$35
Serial cable	$35

S-1000 THINLINE MAINFRAME

+ 6 slot motherboard. cage + Power for S-100 and 2 thinline 8" drives + Fan. EMI filter. connector cutouts + 12" wide × 19" deep × 9.8" high

1–4 pcs	$475
5–9 pcs	$450
10+	$425

CABLES

Kaypro cable. printer—5ft	$35
Osborne printer. parallel—5ft	$35
Osborne serial. modem—5ft	$35
8" floppy. 6 ft. 50 conductor. for 2 drives	$35

Also see Apple. IBM. and Atari

SIERRA DATA SCIENCES

• S-100 cards for single and multi-user systems • Multi-user systems need one master. one additional slave per user and TurboDOS software • Complete systems with drives and CRT terminal are available.

Z-80 4MHz Master (64K/2 serial/floppy controller/hard disk port—S8C-100	$655
Z-80 4MHz Slave (2 serial/2 parallel/64K/EPROM programmer)—S8C-100S	$565
4-Port serial communication board—ZSIO/4	$235
RS-232 Multiplexor board—SOS-MUX	$235
Hard disk interface for Micropolis—SOS-HDI-M	$129
CP/M for Master with BIOS—CPM/BIOS	$150
Turbo-Dos for Master with Slaves—TURBO-DOS	$645

MODEMS

Anchor Automation—FREE SOURCE subscription	WORTH $100
Mark I. 300 baud	$95
Mark II. 300 baud. Atari	$95
Mark III. 300 baud. TI	$115
Mark V. 300 baud. Osborne	$115
Mark VI. 300 baud. IBM PC	$235
Mark VII. 300 baud. auto answer/dial	$135
Mark VIII. 1200/300 baud. auto answer/dial	$435
9 Volt DC Adapter	$10
Hayes Smartmodem 300	$215
Smartmodem 1200	$515
Novation Apple-cat II	$269
212 Apple—cat	$595
D-cat	$179
Auto-cat	$215
212 Auto-cat	$585

ALPHA SOFTWARE

Software for IBM PC and Apple II
We recommend this software. The documentation is excellent. and the prices are comparatively very low.

DATA BASE MANAGER—PC	$229
MAILING LIST—PC	$85
TYPE FACES—PC	$105
TYPE FACES—APPLE	$105
APPLE-IBM CONNECTION—transfers files between	$175

QUME DRIVES

QT242. 8" thin. dsdd	$485
QT842. 8" std. dsdd	$495
QT542. 5¼". dsdd. 48 tpi	$295
QT592. 5¼". dsdd. 96 tpi	$385

S-1000 THINLINE COMPUTER SYSTEM

• Z-80 4MHz. 64K. CP/M • 2 Thinline drives. 8". 2MByte • Mainframe • Add any standard video terminal and printer

NOT $3500 NOT $2500 JUST $1895

ADD-ON DRIVES FOR ZENITH Z-100 COMPUTERS

- 2 Thinline 8" drives. double sided. 2MByte
- Thinline cabinet. vertical. power supply. fan. cable

Just plug it in $1175

COMPUPRO (Godbout)

Co-Processor 8086/8087 8 MHz	$615
Dual Processor 8085/8088 6MHz	$385
Disk 1. Floppy Controller	$490
RAM 17. 64K CMOS. 12MHz	$515
RAM 21. 128K Static. 12MHz	$1155
M-Drive. 128K	$1150
S-100 Mainframe. 20 slot. rack	$795
S-100 Mainframe. 20 slot. desk	$735
System Support 1. I/O	$335
Interfaces 3. 8 serial	$615

WABASH DISKETTES

5¼". Single Sided. Double Density with Hub Ring

5 boxes	$17.50/box

EPSON RIBBONS

MX-80 black	$25/3pcs.
MX-10 black	$39/3pcs.

TELEVIDEO TERMINALS

Extra Memory Pages (kit) INCLUDED—No Charge	
TVI925—w/2nd page	$745
TVI950—w/2nd. 3rd. 4th page	$945

MEMORY IC's

4164 64K Dynamic 200ns	$7.25
4164 64K Dynamic 150ns	$7.95
4116 16K Dynamic 200ns	$2.00
2716 Eprom	$4.00
2732 Eprom	$6.50
6116 2K×8 Static RAM. 200ns	$5.00
6116". 150ns	$5.50

Verify prices by phone. Add 2% for Visa or Mastercard. Add 6½% tax on California orders. Shipping is extra except within the Continental US on prepaid orders. $3 surcharge on orders under $25.

IRONSIDES COMPUTER CORP

(213) 344-3563
(800) 528-9537
18546 Sherman Way, Suite #110,
Reseda, CA 91335

Circle 226 on Inquiry card.

www.americanradiohistory.com

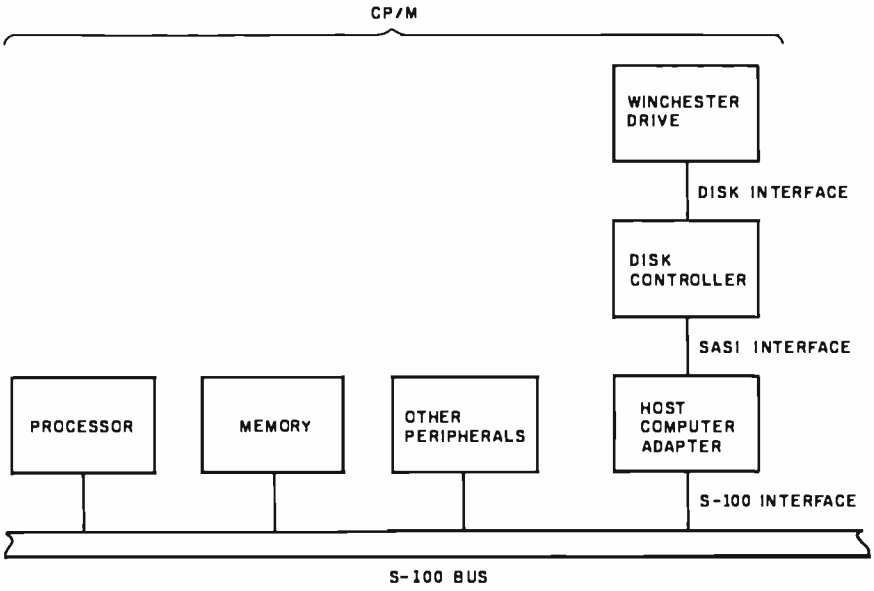

Figure 1: *A block diagram showing how a Winchester disk drive can be interfaced with an S-100-bus computer system.*

tional way (that is, by making and storing an exact copy of the disk to be backed up). However, this problem can be overcome in systems that have a floppy disk in addition to the Winchester drive. If you are willing to take the trouble, important files can be periodically backed up on floppy disks and saved in the event that a Winchester disk malfunctions. This may not be as convenient as standard backup procedures, but it can provide a large measure of data security.

Which Winchester?

During the design process of our system we first had to decide which of the available Winchester disk systems we should use. Currently, Winchester disks are available from a variety of manufacturers with disk platters in different sizes, the most common being 14-, 8-, and 5¼-inch diameters. We evaluated these three options by examining the requirements of a typical microcomputer user. As storage densities have gone up, the 14-inch systems have grown to the point where they can store a staggering amount of data at a relatively low cost. Currently, 14-inch systems have storage capacities in the multiple hundreds of megabytes. Although this leads to a very attractive cost per bit of storage capacity, it also leads to a relatively high absolute cost for microprocessor applications. In our opinion this level of capacity far exceeds the requirements of the typical microcomputer user. To a certain extent, the same logic also applies to the 8-inch drive systems. They are too big and too expensive for the highly price-sensitive microcomputer market. As a result, we homed in on the more recently available 5¼-inch drives as the best alternative. They are relatively inexpensive and are currently available in models that can store over 10 megabytes of data. Additionally, expected technology improvements in the near future will increase this storage capacity to over 40 megabytes. Thus the 5¼-inch format will not only satisfy most of today's requirements but also will provide a large potential for growth.

In addition to price and storage capacity there are a number of other features of the 5¼-inch drives that make them particularly attractive. One asset is a standardized drive interface that allows complete flexibility in switching from one manufacturer's drive to another in a completed system. This also allows companies to build standardized controller boards, which greatly ease the system integration problem. The major advantages of the 5¼-inch Winchester drive for microprocessor system applications are:

1. low cost
2. large storage capacity
3. rapid access time
4. high reliability
5. no need for preventive maintenance
6. common interfaces
7. small and compact size
8. low power requirements and low heat generation
9. availability from multiple vendors with standard interfaces

The Interface Problem

The block diagram in figure 1 presents a common approach to interfacing a Winchester disk with an existing computer system. The existing system contains a microprocessor, memory, and one or more peripherals that are all running under control of the CP/M operating system. All this hardware is plugged into and communicates via the S-100 bus. To add the Winchester system, the designer must provide an HCA (host computer adapter) that allows communication between the existing system bus and the disk controller. In addition, there must be a disk controller that accepts commands from the system via the HCA and in turn commands the Winchester disk to perform the desired functions. Finally, the designer must add software to the CP/M system to receive disk I/O (input/output) requests from application programs, such as "read a file" or "write a file," and translate these requests into commands for the HCA.

Now we'll discuss each of the elements in the Winchester system in more detail, concentrating on the operation of each element as well as the interfaces between the various elements.

The Disk and Disk Interface

A Winchester disk is similar to any other disk system in terms of operation and organization. The disk can be considered to be composed of concentric tracks of recorded information. Each track is further subdivided into sectors. A typical 5¼-inch Winchester drive system may contain upwards of 40,000 individual sectors,

www.americanradiohistory.com

You can wait for industry standards to mandate improved performance. Or you can have it now on Maxell. The Gold Standard.

What distinguishes a Maxell floppy disk? Improvements great and small, achieved in a decade of innovation. We developed unique, uniform crystals to assure dense oxide packing. Intensified the calendering process to minimize the need for abrasive burnishing. Created an improved binder and lubricant. And a new jacket design that leaves industry standards in our wake.

It would require photomicrographs to make some of these improvements observable. On the job, the advantages become obvious. Resolution enhanced by 20% creates a cleaner signal output. And guarantees the read/write accuracy in double-density applications. New jacket construction, heat-resistant to 140°F, extends disk use without risk of mistracking. In effect, durability is redefined. And in accelerated tests against the most respected names in the industry, Maxell sustained the highest and most consistent output over time.

We applaud industry standards that aspire to dropout-free, reliable disk performance. The Gold Standard expresses a higher aim: perfection.

maxell®
IT'S WORTH IT.

Computer Products Division, Maxell Corporation of America, 60 Oxford Drive, Moonachie, N.J. 07074 201-440-8020

Circle 260 on Inquiry card.

www.americanradiohistory.com

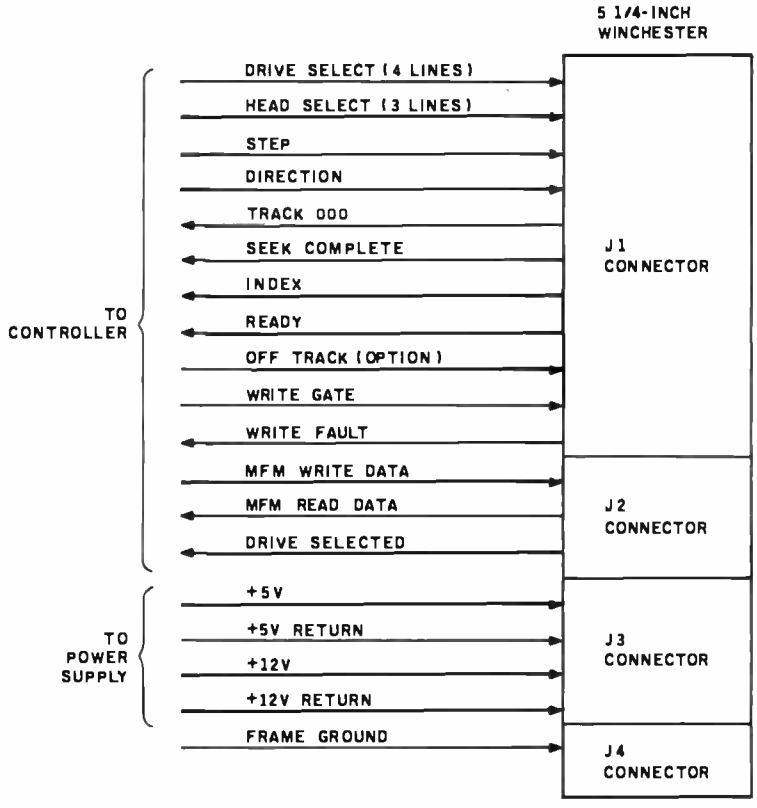

Figure 2: *The standard 5¼-inch Winchester disk-drive interface.*

each containing its own sector address information and data-storage space. As the following discussion will show, the operation of a Winchester disk is very similar to that of a standard floppy disk. The major difference is the speed of operation and the amount of data that a Winchester can hold. The speed of operation also requires that we use a dedicated hardware disk controller rather than have the controller functions performed by software as in a floppy-disk system.

Figure 2 illustrates the standard 5¼-inch Winchester disk drive interface, which connects the disk drive to the disk controller. Signals in this interface are of three basic types. The first type provides power required for disk operation, in this case +12 and +5 volts DC. Signals of the second type are data signals that transfer data between the disk and the controller. The data is transmitted serially at a 5-megabit-per-second rate in MFM (modified frequency modulation) format. The last type of signals are signals for control purposes that

Now, *here's* a printer for you.

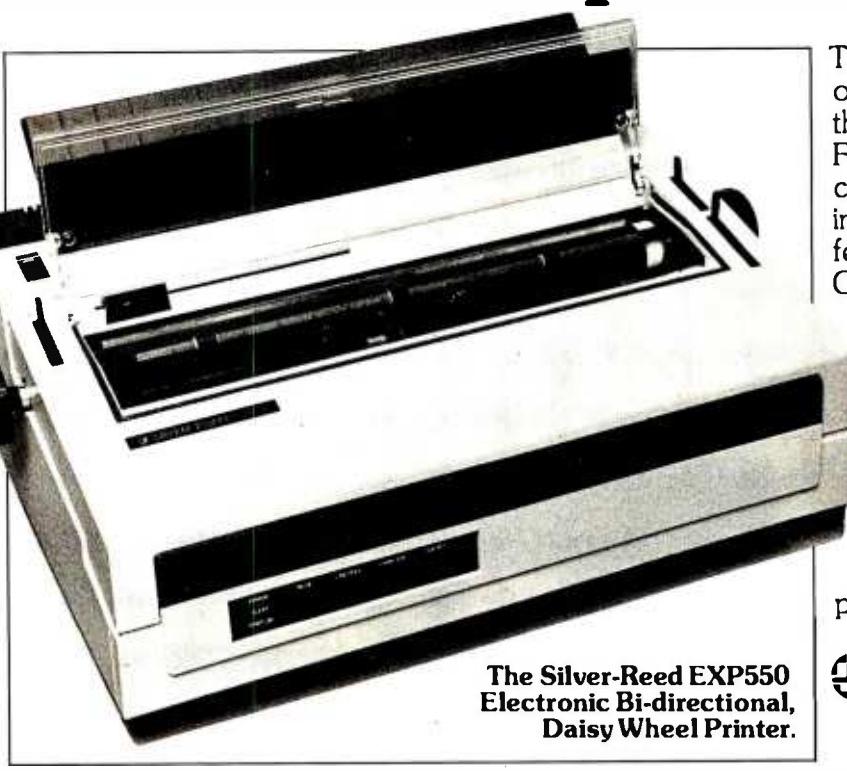

The Silver-Reed EXP550 Electronic Bi-directional, Daisy Wheel Printer.

The new Silver-Reed EXP550 is one of the finest machines for the money on the market today. For starters, the EXP550 offers carrier feed in units of 1/120 inch and forward/reverse paper feed in units of 1/48 inch. Other features include: 16 CPS Shannon text · Subscript · Superscript · Bold · 17 inch paper capacity · 10, 12, 15, PS pitch · and much more. The EXP550 will provide you with letter quality printing at a cost that will amaze you. For more information, call (800) 421-4191 and ask for printer sales division.

SILVER-REED

SILVER-REED AMERICA, INC.
8665 Hayden Place, Culver City, CA 90230
(213) 837-6104. Outside of California (800) 421 4191

OEM & DISTRIBUTOR INQUIRIES WELCOME.

Circle 393 on inquiry card.

www.americanradiohistory.com

GTCO DIGITIZERS MAKE YOU NUMBER ONE

We're the largest producer of electro-magnetic digitizers. So we can deliver field proven tablets in the quantity you need... when you need them.

Our Digi-Pad family uses new technology to provide unique digitizer features.

- PRESSURE PEN
  The pressure sensing pen option gives the operator a more natural input... perfect for the artist.
- 4D
  The 4D option provides another independent variable proportional to stylus tilt and direction ... like a joy stick.
- SELF DIAGNOSTICS
  A 4-tone alarm reports test results for all components including the tablet grid... insuring digitizer integrity.

Every Digi-Pad is compatible. So when you develop your software and interface around our smallest and least expensive Digi-Pad (under $1000), you can interchange any other size Digi-Pad without redesign. Digi-Pad is also compliant with U.L., FCC and many other standards.

Give your system an edge. Choose the number one digitizer from GTCO. Call us at (301) 279-9550 today.

GTCO Corporation
1055 First St. / Rockville, MD 20850
(301) 279-9550 Telex 898471

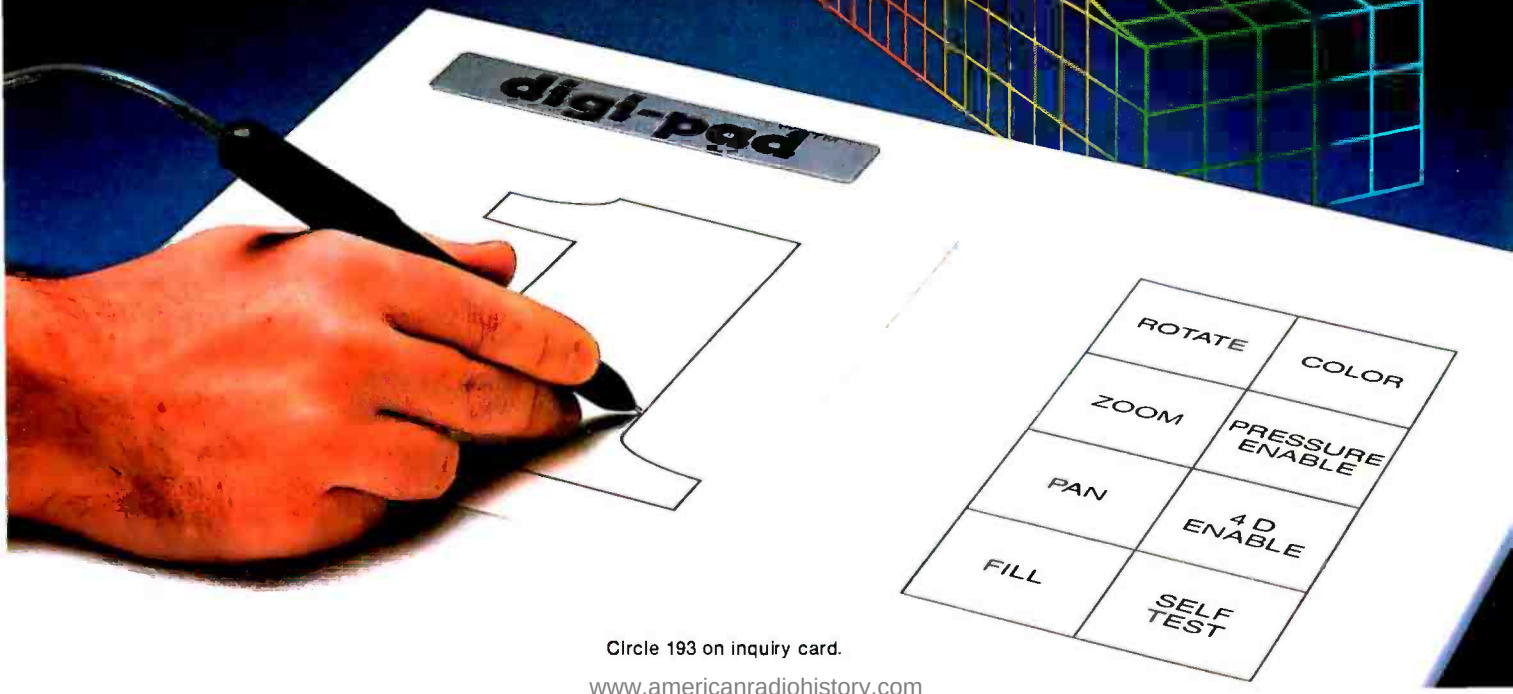

Circle 193 on inquiry card.

www.americanradiohistory.com

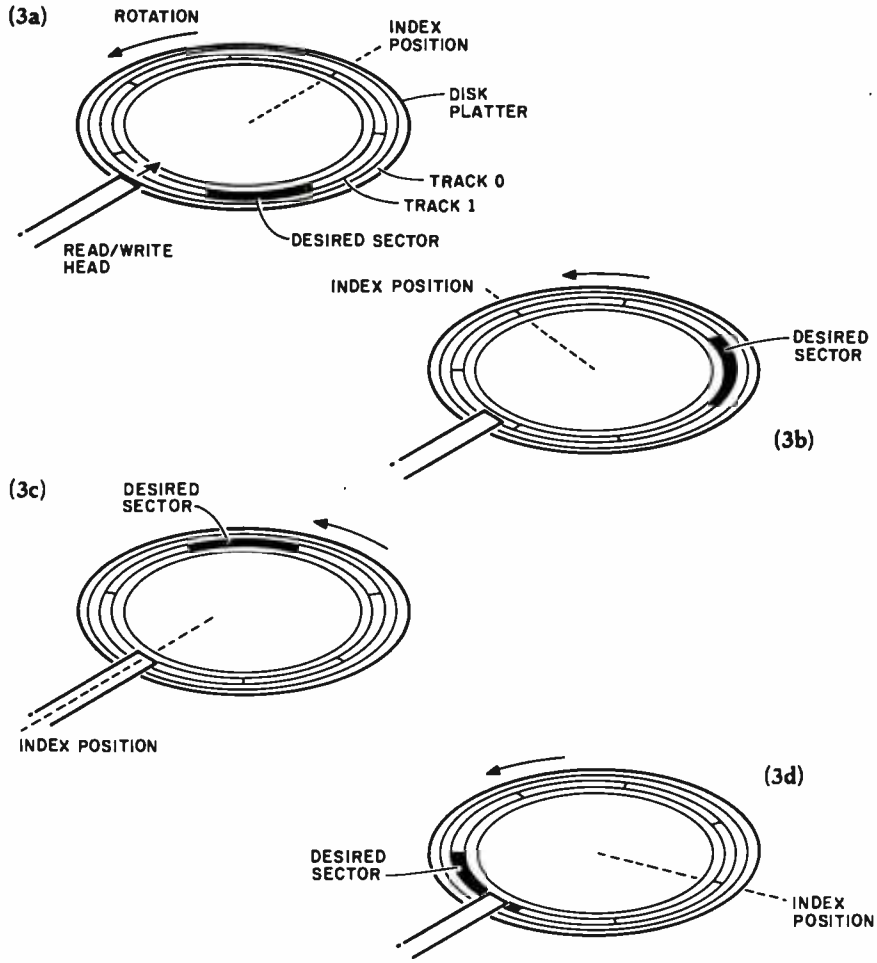

Figure 3: *Reading a sector on a hard disk. In figure 3a the read/write head moves to the proper track. In 3b the read/write head is positioned and waiting for the index pulse. When the index position passes under the read/write head (3c), the disk controller starts reading the first sector on the selected track and continues to read until the desired sector is reached. In figure 3d the desired sector is under the read/write head and the controller begins transferring data.*

allow selection of a particular drive, stepping of the read/write head in the selected drive, and control of other primitive disk functions.

Probably the easiest way to understand disk operation is to go through the steps involved in seeking and reading data on a particular sector of the disk. In our case, these are the functions performed by the controller. As the first step in the process, the controller moves the read/write head to the track containing the desired segment by sending control signals to the disk drive. When the read/write head is on the proper track, the controller then waits for a specific portion of the disk called the index position to pass under the head. This index position provides orientation information which identifies the start of a track. The controller then begins reading the serial data coming from the disk, looking at the sector-address information for each sector until it locates the address indicating the desired sector. The data immediately following this address is then captured and the read is completed. This sequence of events is shown diagrammatically in figure 3.

A disk-write operation is performed similarly. The same sequence of events occurs until the controller locates the proper sector. At this point, instead of reading data from the disk, the controller sends new data to the disk for recording.

The final point to be covered is how the sector-address information is put on the disk in the first place. This process is called formatting. When a disk is formatted, the controller starts on track 0 and, following the index position, writes the sector-address information for the first sector on the disk. It then fills the data area following the first address with nulls or other characters to reserve the data space for future use. As soon as it has filled the area, the controller begins the process over again for the next sector, writing the sector-address information and then reserving the data area. This process continues until all the sectors on the first track of the disk are formatted. The controller then steps the read/write head to the next track and repeats the process until it has formatted all the sectors on all the tracks.

Formatting is typically performed only once because creating the sector addresses and reserving the data areas would destroy any previously stored information on the disk. When formatting, we generally have to define the size of the data area associated with each sector. The size of this area affects the total number of sectors on the disk and thus the fraction of the available disk space that the sector-address information occupies. Typically, these data areas are set up to hold either 256 or 512 bytes of information, although special applications could require different allocations for optimum storage efficiency. For our case we will restrict consideration to the 256- or 512-byte cases.

Because of the need for formatting (i.e., placing sector-address information on the disk) manufacturers quote two storage-capacity measures for disk systems. The unformatted number refers to the total amount of data that can be stored on the disk. The formatted number refers to the total amount of data space that is available on the disk after it has been formatted. In general, the latter measure is of more importance to disk users.

The Controller and Controller Interfaces

Working backward from the disk drive toward the S-100 bus, the next device in the disk-drive subsystem is the disk controller. We just discussed

text continued on page 142

www.americanradiohistory.com

computers wholesale

315-472-3055

Box 91 Brewerton, N.Y. 13029

Circle 114 on Inquiry card.

We pay UPS shipping charges on prepaid orders.

—SYSTEMS—

ALTOS ..... 20% OFF LIST
ACS-8000-2 ..... $2649
ACS-8000-10 6195
ACS-8000-12 7189
ACS-8000-14 8790
ACS-8000-15 3739
MTU-1 2000
MTU-2 2000
Series 5-15D 2285
Series 5-5D 4275

ATARI
800 (48K) $659
400 (16K) 259
810 Disk Drive 449
850 Interface 169

CROMEMCO
CS-0 ..... $1035
CS-1 3195
CS-1H 5595
CS-2 3755
CS-3 5595
ZPU 315
64KZ 585
TuArt 249
16FDC 475
The complete CROMEMCO line is available.

INTERTEC
Superbrain II Jr. $1969
Superbrain II QD 2349
Superbrain II SD 2650

MORROW DESIGN
Decision I $1335
Micro Decision w/Terminal
1 Drive ..... Call
2 Drives ..... Call
Discus 2D 830
Dual Discus 2D 1385
Call us for prices on the full MORROW line.

NORTHSTAR
Advantage $2895
Horizon 2Q-64K 2655
HD 18 Mg. Disk 3879
G CP/M® for Advantage 119
We carry the complete NorthStar line—Call!

TELEVIDEO
TS-801 ..... $2650
802 2755
802H 4755

ZENITH
Z-89-80 CP/M® or H/DOS $2075
Z-89-82 CP/M® or H/DOS 2115
Z-90-80 CP/M® or H/DOS 2115
Z-90-82 CP/M® or H/DOS 2299

Advertised prices reflect a cash discount on prepaid orders only. Most items are in stock for immediate delivery in factory sealed cartons with full factory warrantees.

—TERMINALS—

HAZELTINE
Esprit 429
Esprit II 515
Esprit III 715
1420 589
1500 845
1520 1350
Executive 80-20 ..... *Save!* 975

INTERTEC
Intertube III 725

SOROC ..... Call!

TELEVIDEO
910 ..... $559
912 659
920 719
925 719
950 899
X-tra Page Memory 80

WYSE
100 ..... $749
100, 2 Page 799

ZENITH
Z-19 ..... $639
ZT-1 549

—PRINTERS—

ANADEX
DP9500 ..... $1290
2K Buffer 80
9501 1290
9620 1475

CENTRONICS
704-9 Ser. $1519
704-11 Par. 1569
730-1 Ser. ..... *Save!* 299
730-3 Ser. 479
737-1 Par. 689

C.ITOH
Prowriter 8510A Par. $425
Prowriter 8510A Ser. 595
Starwriter F10 Par. 1370
Starwriter F10 Ser. 1370
Printmaster F10 Par. 1785
Printmaster F10 Ser. 1785
C.ITOH Starwriter F10-Tractor, 200
Prowriter II ..... Call

DIABLO
620 RO 25CPS $1275
630 RO 40CPS 1949
Tractor. (for 630 only) 275

EPSON
MX-80 ..... $440
MX-80FT 520
MX-100 715
Serial RS232 w/2K 120

INTEGRAL DATA SYSTEMS
Prism 80 Basic $750
Prism 132 Basic 1075
Prism 80 Package 1299
Prism 132 Package 1465
Prism 80 All but color 1065
Prism 132 All but color 1260
Paper Tiger 445G 599
Micro Prism 639

NEC
3510 ..... $1515
3515 1540
3530 1650
7710 2295
7715 2395
8023 465

OKIDATA
80 ..... $300
82A 395
83A 639
84S 1020
84P 989
Tractor for 80/82A 50

SMITH-CORONA TP-1 ..... $629

TEXAS INSTRUMENTS
TI-810 Basic $1289
TI-810 VCO/Full 1549
TI-820 RO Basic 1545
TI-820 KSR Package 1739

—MONITORS—

AMDEK
100G 141
Color I 310
Color II 649
Color III 419
300G 149

BMC
Green Phos. $99

SANYO
9"Green Phos. $159
12"Green Phos. 209
13"Color 439

ZENITH
Z-121 115

—HARD DISKS—

CORVUS
5MB $2555
10MB 3995
20MB 4795
**Please specify what type of computer used*
Mirror Backup 629

MAEZON
5Mg. $2235
10 Mg. 2760
15 Mg. 3020
CP/M®-S100 75

—MODEMS—

HAYES
Micro Modem 100 ..... $279
Micro Modem II 279
Smartmodem 300 215
Smartmodem 1200 520
Chronograph 199

NOVATION
4102D $269
D-Cat 145
Apple Cat II 310
Nov-212 1200 Baud 549

SIGNALMAN
MK I $79
MK II 79
MK IV 135
MK VII 125

—SOFTWARE—

ASHTON-TATE
D Base II $593

COMPU-View
V-Edit 125

MICROAP
Select III 155
Selector IV 245
Selector V 455
Glector 245

MICAH
CP/M®2.X 225
Expand 85

MICROPRO
Supersort I 165
Supersort II 155
WordStar 295
Mailmerge 115
DataStar 245
CalcStar 225

MICROSOFT
Z-80 Soft Card 295
Apple 16K RAM Card 165
Edit 80 85
Macro 80 165
Basic 80 275
Bascom 305
Fortran 80 335
Cobol 80 565
Softcard Premimum Pack 625

MICRO TECH ..... CALL

SORCIM
Supercalc 225

BLANK DISKS—Call for prices
—MEMOREX, MAXELL, SCOTCH, VERBATIM—

If you can't find what you need listed here, just call for the best prices on the items you require.

N.Y. residents, add appropriate sales tax. Shipping is not included (unless otherwise stated) C.O.D.s require a 25% deposit. All prices and offers may be changed or withdrawn without notice.

www.americanradiohistory.com

IMAGINE IT...

COMPLETELY REDESIGNED. NOW, THE GRAPPLER+.

The original Grappler was the first graphics interface to give you hi-res screen dumps from your keyboard. The new Grappler+ with *Dual Hi-Res Graphics* adds flexibility with a side-by-side graphics printout of page 1 and page 2.

The Grappler+ can now be used with the Apple® Dot Matrix, the Okidata 84, and is Apple III compatible.* In addition, the IDS Grappler+ is currently available with color capability, including color graphics screen dumps.

UP TO 64K BUFFER OPTION

An optional Bufferboard can now be added to all existing Grappler and Grappler+ interfaces. See your Apple Dealer for details.

*Requires additional software driver.
**Requires graphics upgrade.

© Orange Micro, Inc. 1982

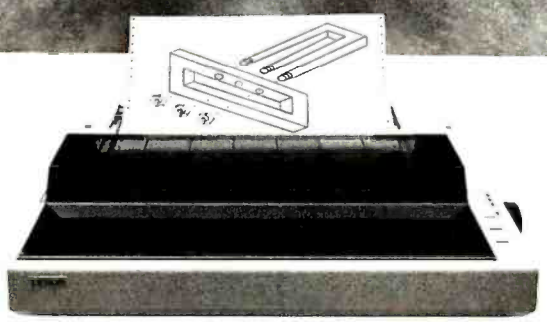

ACTUAL APPLE II PRINTOUT USING GRAPPLER AND EPSON MX100.

With The Grappler+ Printer Interface

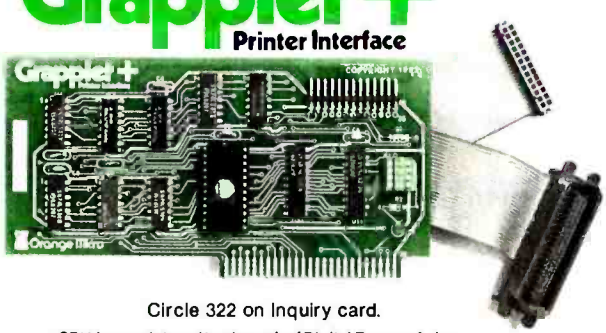

Circle 322 on Inquiry card.

CPM is a registered trademark of Digital Research, Inc.
Apple is a registered trademark of Apple Computer, Inc.

THE GRAPPLER+ FEATURES:
• Dual Hi-Res Graphics • Printer Selector Dip Switch • Apple III Compatible* • Graphics Screen Dump • Inverse Graphics • Emphasized Graphics • Double Size Picture • 90° Rotation • Center Graphics • Chart Recorder Mode • Block Graphics • Bell Control • Skip-over-perf • Left and Right Margins • Variable Line Length • Text Screen Dumps • also works with Pascal and CPM.

THE GRAPPLER+ INTERFACES WITH THE FOLLOWING PRINTERS:
• Anadex • Apple Dot Matrix • Centronics 122 • C. Itoh ProWriter • Epson MX-70, MX-80**, MX-80F/T**, MX-100 • IDS 460, 560, Prism 80 and 132, Microprism • NEC 8023 • Okidata 82A**, 83A**, 84.

Orange Micro inc.

1400 N. Lakeview Ave.,
Anaheim, CA 92807 U.S.A.
(714) 779-2772 Telex: 183511 CSMA
Foreign Dealer Inquiries Welcome

www.americanradiohistory.com

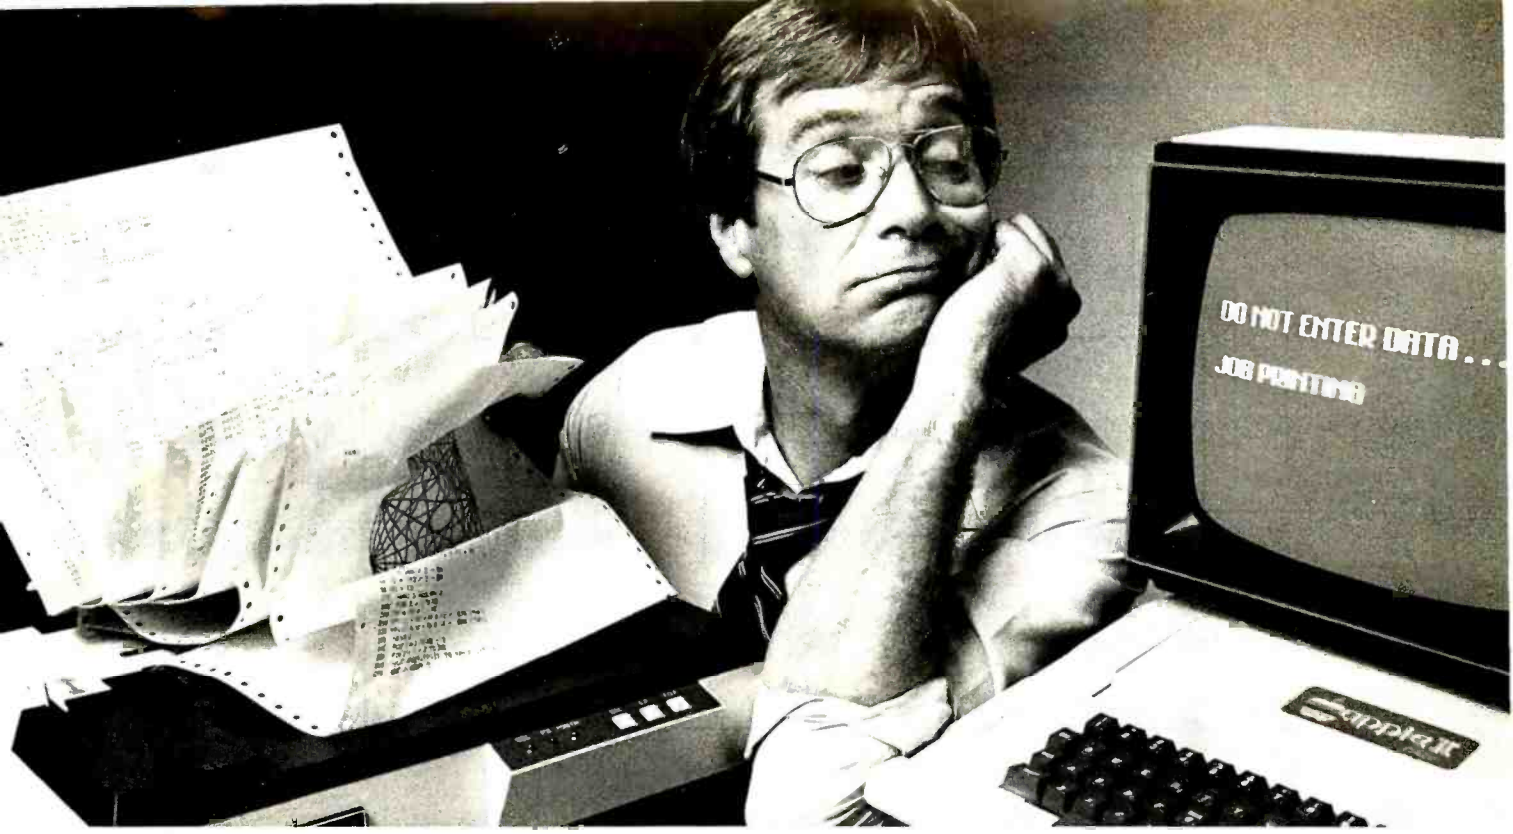

If your printer uses your Apple® more than you do, you need The Bufferboard.™

If your Apple is locked into the "PRINT" mode so much that you've taken up solitaire to kill the boredom, you need a buffer. And if your computer is the Apple II or III, the only buffer for you is The Bufferboard. Expandable to 64K of storage, The Bufferboard stores an instantaneous **bucketful** of print data from your computer. Then it feeds the data to your printer at its own printing rate. Your Apple is set free from driving your printer and is ready for more data from you.

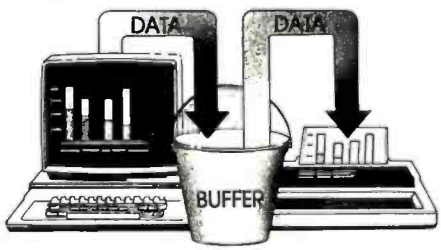

Take your existing interface—and buffer it!

Only The Bufferboard has a simple Interface-Docking System. No bulky boxes or expensive power supplies are needed because The Bufferboard fits right into your Apple—and **docks** onto your existing printer interface. The result is convenient

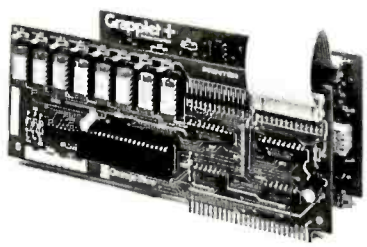

and economical buffering of most popular printer interfaces, including the Grappler+™ interface, Epson interface, and Apple printer interface. Thirty seconds and a single hook-up are all you need to end the printer waiting game forever.

Up to 20 letter-size pages stored at a time.

The Bufferboard comes standard with 16K, and is expandable to 32K or 64K of buffering capacity with the addition of memory chips. This "bucket" will hold up to 20 pages of a print job, allowing you freedom to use your Apple.

The Bufferboard—designed exclusively for the Apple Computer.

Specifications:

• Versions for Grappler+ interface, Epson interface, Apple interface, and other popular printer interfaces • 16K buffer standard • Upgradeable to 32K or 64K • Automatic memory configuration • Automatic self test • Includes interface docking cable.

The Bufferboard is made by Orange Micro, Inc.; the same people who brought you the popular Grappler+ printer interface. Both the Grappler+ and The Bufferboard are now available at your local Apple dealer.

Apple is a registered trademark of Apple, Inc.
Epson is a registered trademark of Epson America, Inc.

Orange Micro inc.

1400 N. Lakeview, Anaheim, CA 92807
U.S.A. (714) 779-2772
TELEX: TX 183511 CSMA

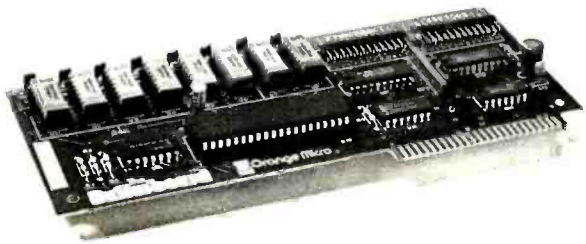

The Bufferboard™
For Apples and Printers

Circle 323 on Inquiry card.

©Orange Micro, Inc. 1982

www.americanradiohistory.com

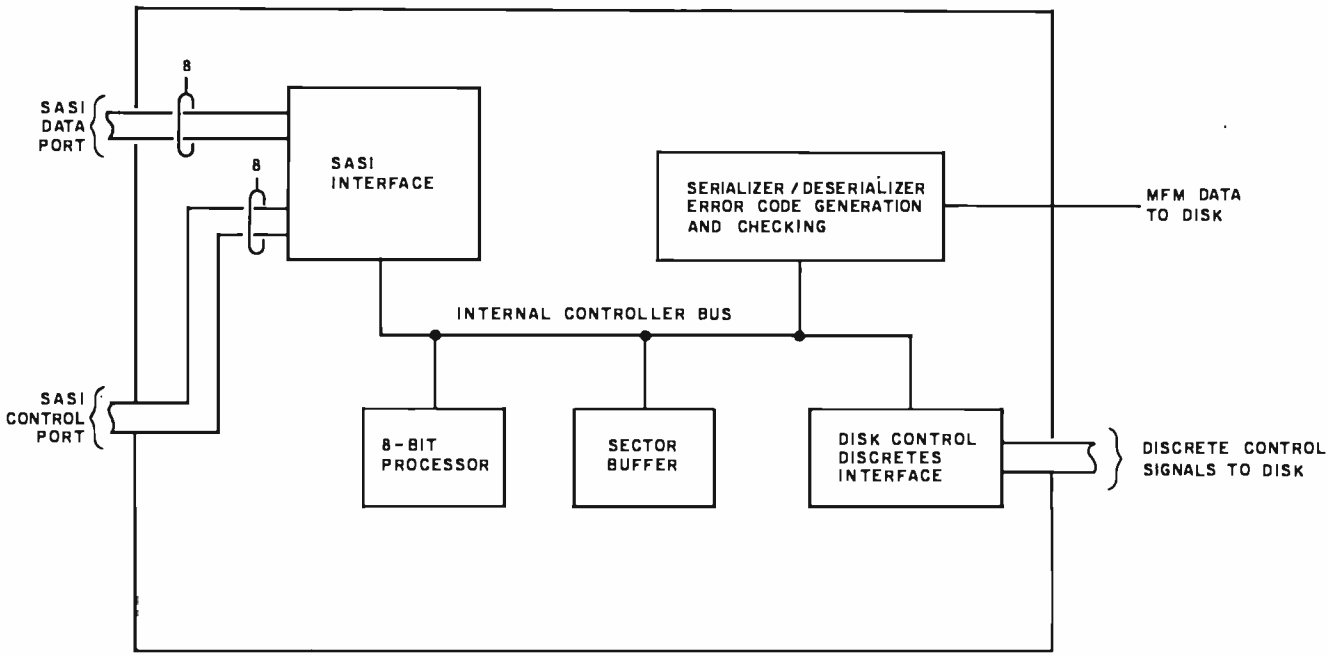

Figure 4: *A block diagram of the disk controller.*

the signals that the controller uses to access particular sectors on the disk. Now we'll discuss how these signals are generated and, in general, how a controller operates.

The controllers we will address are characteristically known as "smart" controllers. This means that they have some internal processing capability and use this capability to perform many of the interfacing chores with the disk without intervention from the host computer. The speed of the Winchester disk drive necessitates a dedicated controller to effectively handle all disk control and timing. Figure 4 presents a conceptual block diagram of this type of controller. The disk-drive interface, which we have already discussed, is on the right, and the interface to the HCA is on the left. A common interface between the controller and the HCA is based on that developed by Shugart Associates, known as the Shugart Associates System Interface (SASI). As shown, the SASI consists of two 8-bit connections. One set of 8 bits is for data and the other is for control signals. The control signals are split, with 5 bits used for controller-to-HCA signals and 3 bits for HCA-to-controller signals.

Internally, the controller is a bus-structured device with an 8-bit processor, a sector buffer, a serializer/deserializer, the disk interface, and the SASI interface connected to the internal bus. Again, the easiest way to understand the operation of the controller is to go through a typical sequence of operations. In this case, the controller will perform a read operation from a particular sector of the disk. The process starts when the host computer, using the HCA, generates a Select signal on the SASI interface. This alerts the controller that a command sequence will be coming in over the 8-bit data port. Through a series of handshakes, a command sequence consisting of 6 bytes of data is passed through the data port of the SASI. These 6 bytes contain the command to be executed by the controller—in this case, read data—and the sector address of the data to be read.

With this information, the controller begins to execute the requested command using its internal processor. It sends commands to the disk to move the read/write head to the track that contains the desired sector. Once the head arrives at the right track, it waits for the index pulse and then starts reading the data coming from the disk to find the appropriate sector. The 8-bit processor reads the data from the disk after it has gone through the serializer/deserializer. The deserializer portion of this device receives the MFM data directly from the disk, performs error checking and error correction on the data, and then passes the data to the 8-bit processor (via the internal controller bus) in parallel byte format. Once the controller locates the desired sector, it transfers the data from the disk into the sector buffer. This buffer is essentially a RAM (random-access read/write memory) chip that is used to store the information retrieved from the disk until it is requested by the host processor. The controller informs the host system, through the SASI port, when it has completed the data transfer. At this point the host can read the retrieved data out of the controller and take any appropriate action with it.

A write operation is performed in a similar manner. In this case, the host sends the Select command and the 6-byte command sequence to the controller that tells it to write data to a particular sector. The host then sends the controller the data to be written into the particular sector. The controller accepts this data and places it in the sector buffer. It then initiates the series of actions to find the sector to which the data is to be written. When the controller locates this sec-

www.americanradiohistory.com

TIME SPECTRUM©

Only the new TIME SPECTRUM brings you a galaxy of expansion options for your **IBM-PC**© with the new **VERSAPAK**© family of expansion modules.

COMPAK SERIAL EXPANSION MODULE - Adds a second serial asynchronous port to the TIME SPECTRUM foundation module.

SYNCPAK SYNCHRONOUS EXPANSION MODULE - Adds two serial synchronous ports to the foundation module.

SNAP ON STANDOFFS - For mounting **VERSAPAK** modules to foundation modules.

RAMPAK MEMORY EXPANSION MODULE - Adds memory expansion to 512KB and an optional second serial asynchronous port to the foundation module.

CLIFFHANGER©- Proprietary connector mounting hardware simplifies installation of I/O lines.

$475
64KB RAM, calendar clock, 1 serial port installed.

TIME SPECTRUM FOUNDATION MODULE - Contains a Real Time Clock, 64KB RAM (expandable to 256KB), serial asynchronous port, optional parallel printer port, and interface connections for **VERSAPAK** modules.

Watch for new **VERSAPAK** modules to be introduced soon.

For more information on the revolutionary new **TIME SPECTRUM** and **VERSAPAK** expansion modules, see your nearest IBM-PC authorized dealer or contact:

PERSYST

15801 Rockfield, Ste. A, Irvine, CA 92714
714-859-8871

Circle 345 on inquiry card.

IBM-PC is a trademark of International Business Machines Corp.
© Copyright Personnel Systems Technology, Inc. 1982

www.americanradiohistory.com

tor, it passes the data from the sector buffer through the serializer, which adds error detection and correction bits to the data, and then sends the result to the disk in serial MFM form.

In addition to the read and write functions, a smart controller can perform a number of other functions, including formatting the disk, reformatting a particular track on a disk, and a variety of built-in test and loopback test functions. These functions are initiated exactly like the read and write functions but with a different set of commands passed to the controller.

The Host Computer Adapter

The last piece of hardware required to complete the Winchester system interface is the host computer adapter (HCA). As figure 1 indicates, this adapter allows communication between the host computer S-100 bus and the SASI on the controller. A number of options are available in designing an HCA, but basically they boil down to the degree of intelligence that is to be incorporated into the HCA. In more simple designs, the HCA consists of only a couple of output ports on the S-100 bus with the proper address-decode logic. In this case, the two output ports on the S-100 bus correspond to the two 8-bit ports of the SASI interface, and the HCA is essentially a buffer device. The disk-driver software then manipulates these two ports to perform any required function exactly as if the controller were part of the system.

More complex designs would allow the HCA to perform some of the functions that would be performed by the host computer in the simpler design. Again, an example will best illustrate the process. Assume that a host system wishes to transfer a sector of 256 bytes from the host system to the disk. In the case of the simple HCA design, the driver software would be informed by the operating system of this required transfer and then would send the proper commands to the controller to initiate the transfer process. In addition, the driver software would sequentially fetch each of the 256 bytes of data to be transferred from the host memory and pass it through the SASI data port to the controller.

An alternate, more complex design of the HCA would eliminate much of this processing burden from the host system's processor. If the HCA were given DMA (direct memory access) capability, all the host processor would have to do would be to tell the HCA what sector to read or write to, where in host memory the data transfer was to begin, and how many bytes of data to transfer. The HCA would then take over the entire process of fetching the data from host memory and passing it to the controller and would simply inform the host processor when the process was complete.

As the description implies, providing the HCA with DMA capability increases the total system performance by reducing the load on the host processor. This increased performance carries with it a penalty in terms of increased cost and complexity of the HCA. In the design of our

QUALITY COMPUTER FORMS
AT PRICES YOU CAN AFFORD

WE SUPPORT MORE SYSTEMS WITH FORMS THAN ANYONE!

INVOICES • STATEMENTS • CHECKS • P.O.'S • SHIPPERS • MEDICAL FORMS
INCOME TAX FORMS • W2'S • LETTERHEAD

Accounting Plus • Altos Accountant • Apple Controller • Broderbund • Continental • Durango • Dynabyte • Gold • Great Plains • Libra Programming Inc. • Microcomputing Consultants • Open Systems • Peachtree • Radio Shack • Solomon • Star • State of the Art • Structured Systems • Systems Plus • TCS • TSE • Vector Graphics

We Support 215 Systems Not Listed Here, So If You Don't See Your Software Here Call Toll Free For A Free Sample Packet Of Forms For Your Software.

SHEERCUT
WORD PROCESSING LETTERHEAD

SHEER CUT LETTERHEAD FROM CHECKS TO-GO USES A NEW PROCESS TO PRODUCE CONTINUOUS FORM PAPER THAT TRIMS CLEAN WHEN BURST. NORMAL COMPUTER PAPER USES FIVE PERFORATIONS PER INCH, BUT SHEER CUT USES A NEW TECHNOLOGY TO PRODUCE 80 PERFS OR "TIES" PER INCH. THIS PRODUCES A VERY CLEAN AND UNIFORM EDGE WHEN BURST, AND IS ECONOMICAL IN BOTH SMALL AND LARGE QUANTITIES. SHEER CUT IS AVAILABLE ON A STOCK FORM BASIS IN FOUR "CLASSIC LAID" PAPERS, OR IN ANY TYPE PAPER ON A CUSTOM ORDER. EVERY OTHER FORM CAN BE IMPRINTED TO PRODUCE CONTINUOUS FIRST AND SECOND SHEETS. BLANK PRICES ARE $60 FOR 1,000, $235 FOR 5,000 AND $400 FOR 10,000, WITH IMPRINTING, DEALER, AND VOLUME PRICING AVAILABLE.

CONTINUOUS AND SNAP-OUT W2'S
AND OTHER CONTINUOUS TAX FORMS

MasterCard VISA AMERICAN EXPRESS

Checks To-Go

CALL TOLL FREE NOW: (800) 854-2750 IN CA (800) 552-8817
(619) 460-4975

8384 Hercules St. • P.O. Box 425 • La Mesa, CA 92041

Your Assurance of Value and Service.

Circle 77 on inquiry card.

www.americanradiohistory.com

The $1795. Personal Business Computer that is changing the way people go to work.

Henry Ford revolutionized personal transportation.

Adam Osborne has done the same for personal business computing.

Virtually everything you need in a personal business computer to work faster and better with words, numbers, and ideas is included in a portable carrying case you can take anywhere.

The Osborne is easy to learn, fun to use, and quickly becomes indispensable.

One price, $1795, buys it *all.*

The Osborne is available from a computer retailer near you.

And you can buy it in any color you want. As long as it is blue.

Put away your buggywhips.

For your nearest dealer, call (in California) 800 772-3545 ext. 905; (outside California) call 800 227-1617 ext. 905.

OSBORNE™
COMPUTER CORPORATION

The $1795 suggested retail price for the Osborne 1 (a trademark of Osborne Computer Corporation) includes a full business keyboard, built-in CRT display, two built-in floppy disk drives, CPU and 64 kilobytes of RAM memory, RS-232 and IEEE 488 interfaces, and the following software packages: WORDSTAR® word processing with MAILMERGE® (a trademark and a registered trademark of MicroPro International Corporation of San Rafael, California); SUPERCALC® electronic spreadsheet system (a trademark of Sorcim Corporation); CBASIC® (a registered trademark of Compiler Systems); MBASIC® (a registered trademark of Microsoft); and CP/M® (a registered trademark of Digital Research).

www.americanradiohistory.com

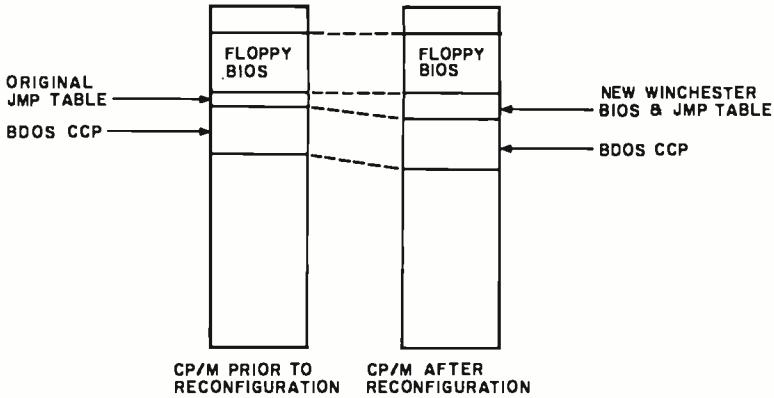

Figure 5: *A block diagram showing how the BIOS for the Winchester disk drive is inserted into the CP/M operating system.*

system, we considered this trade-off carefully. In next month's article on the hardware design, we will go through these trade-offs in detail and describe what system we chose and the reason for that choice.

Variations

Up to now, we have described a general Winchester interface system that consists of a drive, a controller, and an HCA. Any given system must contain all these components. However, there is considerable latitude in how these components are packaged. One common packaging strategy is to put the controller and HCA functions on the same board. In this configuration, a single board plugs into the S-100 bus and a ribbon cable connects this board to the disk. In another strategy, the HCA is plugged into the S-100 bus and a ribbon cable connects the HCA to the controller and another ribbon cable connects the controller to the disk. This second configuration is likely to be more common because it allows builders of controllers to build one controller card that is applicable to many systems. In fact, as you will see next month, this is the configuration we chose.

In the previous discussions, we have not mentioned the possibility of adding multiple Winchester drives to a system. This is certainly possible and can be done with very little design effort. In most cases, the incremental cost of the second drive amounts to only the cost of the drive itself and the interconnection hardware. We will cover this option in detail next month when we discuss the specifics of the hardware implementation we chose and the particular controller hardware.

Operating System Considerations

The final step in integrating a Winchester disk into an existing S-100 CP/M-based system is to somehow make the CP/M operating system aware that the disk is part of the system. This is done by expanding the existing CP/M BIOS (basic input/output system) to include the new disk. The existing BIOS contains all the software necessary to run the current peripherals on the system. The modification we need would keep these existing routines and add the necessary routines to communicate with the new Winchester disk drive. The simplified memory map of CP/M both before and after the required modification, presented in figure 5, shows how this can be done. At the top of the existing BIOS is a jump table that points to the various primitive disk functions for an existing system. These functions include set track, set sector, select disk, read sector, write sector, etc. In order to add these functions for the new disk, the CP/M system is moved using the MOVECPM utility, and a new jump table is installed that points to the new disk routines. This new code, in addition to performing the required

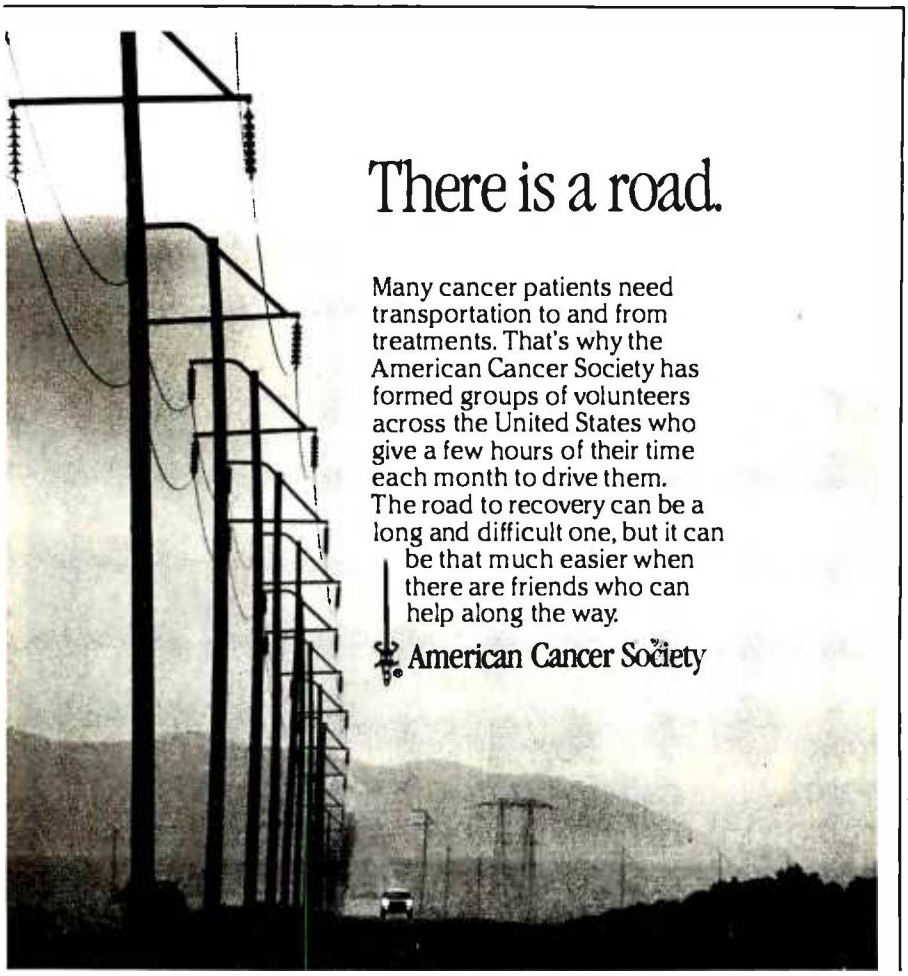

This space contributed as a public service.

www.americanradiohistory.com

Powerful CP/M Software.

For Apple, Osborne, TRS-80, North Star, SuperBrain, Micropolis, Altos and others.

Now only $29.95 each!

NEVADA COBOL

was $199.95 now only **$29.95.**

When we introduced Nevada COBOL three years ago, it was loaded with innovations. Today's Edition 2 is even better! For example:

☐ It's 4 to 20 times faster than any other micro COBOL according to an independent study*. What's more, it's easier to use.

☐ Extremely Compact. You can compile and execute up to 2500 statements in 32K RAM, 4000 statements in 48K, etc.

☐ It's based upon the ANSI-74 standards with level 2 features such as compound conditionals and full CALL CANCEL.

☐ You get a diskette, 153-page manual with lots of examples and 16 complete COBOL source code programs.

NEVADA PILOT

was $149.95 now only **$29.95.**

☐ Perfect for industrial training, office training, drill and testing, virtually all programmed instruction, word puzzle games, and data entry facilitated by prompts.

☐ What's more, John Starkweather, Ph.D., the inventor of the PILOT language, has added many new features to Nevada PILOT. There are commands to drive optional equipment such as Video Tape Recorders and Voice Response Units. There's a built-in full-screen text editor and much more.

☐ Meets all PILOT-73 standards for full compatibility with older versions.

☐ You get a diskette, 114-page manual and ten useful sample programs.

NEVADA FORTRAN

was $199.95 now only **$29.95.**

☐ IF . . THEN . . ELSE constructs.

☐ COPY statement.

☐ A very nice TRACE style debugging.

☐ 150 English language error messages.

☐ You get a diskette, 174 pages of Documentation and five sample programs.

NEVADA EDIT

was $119.95 now only **$29.95.**

☐ A character-oriented full-screen video display text editor designed specifically to create COBOL, BASIC and FORTRAN programs.

☐ Completely customizable tab stops, default file type, keyboard layout and CRT by menu selection.

☐ The diskette comes with an easy to read manual.

To make our software available to even more micro users, we've slashed our prices. What's more, we're offering a money back guarantee. If for any reason you're not completely satisfied, just return the package—in good condition with the sealed diskette unopened—within 30 days and we'll refund your money completely.

This is a limited time offer, so order yours today!

Shipping/handling fees. Add $4.00 for first package and $2.00 each additional package. OVERSEAS Add $15.00 for first package and $5.00 each additional package. Checks must be in U.S. funds and *drawn on a U.S. bank!*

"A Compiler Benchmark: A Comparative Analysis of Four COBOL Compilers" by Stephen F. Wheeler. Trademarks: CP/M, Digital Research; TRS-80, Tandy Corp.; Apple II, Apple Computer Inc.; Osborne 1, Osborne Computer Corp. © 1982 Ellis Computing.

ELLIS COMPUTING

MAIL TODAY!

To: Ellis Computing (415) 753-0186
3917 Noriega St
San Francisco, CA 94122

The CP/M operating system and 32K RAM are required.

Indicate diskette format:
☐ 8" SSSD
5¼" ☐ Apple CP/M ☐ Osborne ☐ N*SD ☐ N*DD
☐ TRS-80 Mod I ☐ Micropolis Mod II
☐ TRS-80/mapper ☐ Superbrain DD DOS 3.X

Indicate software packages: ☐ COBOL ☐ PILOT ☐ FORTRAN ☐ EDIT

Send my order for ___ packages @ $29.95 each Total _____
In CA add sales tax _____
☐ Check enclosed ☐ COD Shipping/handling _____
If COD add $4.00 _____
☐ MasterCard ☐ VISA TOTAL _____

_____ Exp. Date _____

Signature _____ Phone # _____

Ship to:
Name _____
Company _____
Street _____
City/St/Zip _____
Country _____

Offer expires 3/31/83

Circle 172 on Inquiry card.

www.americanradiohistory.com

disk functions, keeps track of which disk is selected. If the Winchester is the selected disk, then these new routines perform any requested functions. On the other hand, if another disk or peripheral is selected, say the existing floppy disk, then the commands are passed directly to the old BIOS routines for that system. In this way, with a minimum of difficulty, the disk primitive routines for the new disk can be included in the CP/M system. We will cover the details of the BIOS routines for the Winchester system as well as the procedures for reconfiguring the existing system in part 3.

Summary

So far we have covered, in a general way, all the components required to interface a Winchester disk with an existing S-100, CP/M-based system. You should now have a fairly complete understanding of what a Winchester disk is, how it operates, and what some of the differences are between Winchester disks. In addition, you should now have a general grasp of the 5¼-inch drive interface, the Shugart Associates Standard Interface, the functions of a smart controller, and the host computer adapter. In parts 2 and 3 we will cover a specific example of the interfacing process in detail, using commercially available equipment: next month we will describe the hardware including the HCA, the controller, and a disk power supply; and in the final article we will describe the software aspects of writing new BIOS routines for CP/M and reconfiguring the system to include the new Winchester disk drive.

These articles will cover only the details of interfacing with S-100 CP/M-based systems. For interfacing with other computers and operating systems, however, the procedure is much the same. First, an HCA must be designed to allow communication between the host computer and the disk controller. Then the equivalent of the CP/M BIOS must be found in the operating system used, and new code must be generated to include the Winchester disk system. Depending on the availability of documentation on the hardware and operating system, this may or may not be an easy task. Hopefully, this series will provide a reference point from which to proceed. ■

The Winchester disk drive subsystem described in this series of articles is available as a completely assembled unit from ASC Associates of Lexington Park, Maryland. In addition to the S-100 version discussed, versions are also available for TRS-80 and Apple computers. The disk-drive systems for these computers use the same drive and controller hardware as the S-100 version but use a different host computer adapter and interface software. Until a nationwide dealer distribution network is established, these systems will be available by mail order for $1995. To order or obtain further information, write to ASC Associates Inc., POB 615, Lexington Park, MD 20653, or phone (301) 863-6784.

Serial ⟷ Parallel

only $89.95
Connector Option $10.00
CA Residents 6% tax
UPS Shipping $3.00

Engineering Specialties ™
1501-B Pine Street
Post Office Box 2233
Oxnard, California 93030

Printers! Plotters! Punches! Robots!

Convert What You Have To What You Want!

★ RS232 Serial ★ Centronics Parallel
★ 8 Baud Rates ★ Handshake Signals
★ Latched Outputs ★ Compact 3¼ × 4⅜ × 1½

No longer will your peripheral choices be limited by the type of port you have available! Our new High Performance 700 Series Converters provide the missing link. Based on the latest in CMOS technology, these units feature full baud rate selection to 19.2K, with handshake signals to maximize transfer efficiency. Detailed documentation allows simplified installation. Order the Model 770 (Ser/Par) or Model 775 (Par/Ser) Today!

Buffer Products Coming Soon!

master charge

CALL (805) 487-1665 or 487-1666 For *FAST* Delivery

VISA

Circle 176 on inquiry card.

www.americanradiohistory.com

COMPUTER SPECIALTIES

Circle 109 on inquiry card.

FRANKLIN ACE 1000

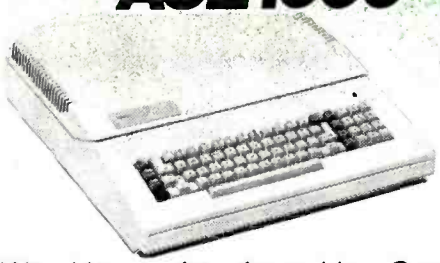

We Have An Ace Up Our Sleeve For You!
Call For **Sale** Price Now!

NEW! The Ace 1200

- 6502 & Z-80 Processors
- Built-in Drive • 128K RAM •
- 80 Columns

On Sale Now!

BASIS 108

THE ALTERNATIVE
On Sale Now!

ALTOS COMPUTER SYSTEMS

Minicomputer Performance at Microcomputer Prices.
CALL NOW & SAVE!

SYSCOM SYSTEMS

New Apple Compatable System $799.00

ACCESSORIES

Fourth Drive	279	Hayes 1200 Baud	539
Fourth Controller	89	Sooper Spooler (16K)	299
Rana Elite One	299	Z-80 by Microsoft	229
Rana Controller	89	Videoterm (80 col.)	244
Micro Sci A-2	349	**EPS Keyboard**	**319**
Micro Sci A-40	349	**The Grappler Plus**	119
Trackball By T.G.	**49**	RGB by Electrohome	219
3" Drives by Amdek	749	**Parallel Card (6' cable)**	69
New Vista Products...Call!		Z-Card by ALS	139
Versa Card	169	**The CP/M Card By ALS**	**329**
16K Ram (2yr WNTY)	59	**Synergizer By ALS**	**529**
Softcard Plus By MS	449	Joystick by TG	46
Softcard Prem. System	449	In Line Buffer	229
J-Cet By Nov	**124**	Disk Emulator (294K)	689
CPS Multi-Func by Mtn	169	**Appli-Card 6MZ**	429
Micro Modem II*	278	Expan Chassis by Mtn	539
Smart Modem	219	Winchester Hard Disk	CALL

*APPLE IS A REGISTERED TRADEMARK

apple®*

SOFTWARE

Screen Writer II	103	PFS: Graph	89
Magic Window	69	Desktop Plan	184
SuperText II by Muse	118	Wall Streeter by M.L.	219
BPI SOFTWARE...CALL			
Exec Secretary by S.S.	189		
Pro. Easy Writer by IUS	129		
LetterPRFTw/mailmerge	109		
WORD HANDLER	147		
General Manager	109		
Visicalc by Visicorp	183		
PFS by Soft Pub. Corp	69		
Visifile by Visicorp	184		
Visitrd/Visiplt by Visicorp	196		
PFS: Report	69		
DB Master	164		

CP/M®* SOFTWARE

Basic Interpreter™	CALL
Basic Compiler by MS	289
Cobol-80 by Microsoft	539
Fortran-80 by Microsoft	146
Word Star	299
Mail Merge	159
Spell Star	159
Data Star	189
Calc Star	99
Supercalc	212
d Base II by Ashton-tate	494
G/L by Peachtree	CALL
A/R by Peachtree	CALL
Peachcalc	CALL
Quickcode	239
Tax Preparer '82	109
Real Estate Analyzer	139
Bag of Tricks	29
Zoom Graphix	27
Special Effects	27

CALL FOR CATALOG!
*CP/M is a Registered Trademark

COLUMBIA

The Columbia MPC is **IBM® P/C** Hardware & Software Compatable.
The Price? Non-Comparable!
Save Hundreds and Call

FREE* SHIPPING

SALE KAYCOMP II

By Non-Linear Systems

The totally portable, powerful and profitable computer for your home or office.

- Z-80 • 64K Ram • two 5¼" floppy disc drives (double density) • 9" video display (80 col.)
- RS-232C • Parallel Printer • Interface

SOFTWARE INCLUDED!

- CP/M™ 2.2 • S/Basic • Profit Plan
- Perfect Writer W/P • Perfect Calc.
- Perfect Filer • Perfect Speller

IBM•IBM•IBM•IBM•IBM•IBM•IBM•IBM

AST

Combo Plus 64 (SPC)	429
Combo Plus 256 (SPC)	699
Mega Plus 64 (SP)	499
Mega Plus 266 (SP)	799

QUALITY COMP

Big Blue	479

DAVONG

5 MB Hard	1589
10 MB Hard	1989
15 MB Hard	2380
Slave 5 MB	1290

QUADRAM

Quadboard II 64K	459
Quadboard II 256K	739
Quad 512+ 64K	399
Quad 512+512 K	1099
Quadscreen	499
Quadcolor I	299
Quadcolor III	719

Tecmar

CALL!

XEDEX

Baby Blue CP/M	489
Baby Blue Ram Plus	679

SOFTWARE

Visicalc (256K)	185	Vedit-86 by Cmpview	199
Word Star	249	The Programmer	369
Mail Merge	88	CP/M-86 by Digital	279
Peachtree Pkgs	CALL	Basic-80 by MSoft	297
Volks Writer	129	Fortran-80 by MSoft	419
Super Calc	217	M/Sort by MSoft	159
Easy Writer II	239	Easy by Denver	543
Home Acct. Plus	109	Mathemagic by ISM	69
CP/M-86 by Cmpview	299	Logon by Ferox	129
Vedit by Cmpview	129	Fastscreen by Cu	73

CALL FOR CATALOG!

ZENITH

Z-100 All In One (Z-120-22)	Sale!
Z-100 Low Profile (Z-110-22)	Call
Color Upgrade Kit (Z-219-1)	139
192 K Upgrade Kit (Z-205-1)	155
RGB Color Monitor 13" (ZVM-134)	589
Auto-Dial Terminal (ZT-1-A)	589
System Software Pack #1 (Z55-100-1)	449
System Software Pack #2 (Z55-100-2)	299

commodore

All New 64 & Vic Catalog...Free!

SALE

Dataset	64		
Disk Drive	469		
Graphic Printer	319		
16K Mem. Expander	79		
24K Mem. Expander	139		
IEEE-488 Card	69		
6 Slot Expand.	99		
Afron Chassis	198		
40/80 Col. w/16K	229	Choplifter (cart.)	34
40/80 Col. w/64K	319	Trashman (cart.)	33
Wico Joystick Delux	37	Hesmon (cart.)	36
Wico Trackball	59	Vic Fourth (cart.)	4 9
Modem	95	Personal Jour. (tape)	26
Centronics Cable	69	Vic-Journal (tape)	29

Software

ATARI CARTRIDGE ADAPTER!

Use Cartridges For Atari 400/800 On Your Vic
On Sale $79.00

APPLE LOADER!

FOR C-64 .....$89.00

C-64 Accessories		C-64 Software	
Video Pak Z-80	259	Hesmon 64 (cart.)	29
Video Pak 80	159	Heswriter 64 (cart.)	34
IEEE Adapt. by MS	89	Home Journal (tape)	39
Viac (adapt any cass)	45	DataCalc (tape)	39

EAGLE

The Price/Performance Leader!

Eagle II	2495
Eagle III	3199
Eagle IV	4699
File 10	2450

New! Eagle 1600 (8086 Microprocessor) Call!
Free Brochure

ATARI

1200XL On Sale!
800 w/48K 529
400 w/16K 229

410 Recorder	74	The Bookkeeper	194
810 Disk Drive	439	The Entertainer	69
825 Printer	639	The Educator	124
830 Modem	159	The Programmer	56
850 Interface	159	The Communicator	334
Full-View 80	279	PacMan	33
Joystick (Pair)	18	Mouskattack	26
48K by Intek	189	Choplifter	27
32K by Microtek	99	Frogger	27
1010 Recorder	79	Gorf	33
Epson Cable	34	Microsoft Basic	69

CALL FOR CATALOG!

TERMINALS — TELEVIDEO

TVI 910	578
TVI 910 Plus	589
TVI 970	1150

MONITORS — NEC

JB 1260 12" Green	129
JB 1201 12" Color	329
12" RGB (Hi-Res)	789

PRINTERS — OKIDATA

Microline 92	549
Pacemark 2410P	2350
Microline 82A	419

ADDS

Viewpoint A-1	479
Viewpoint A-2	CALL
Viewpoint /60	749

AMDEK

Video 300	149
Color I	309
Color II	729

C. ITOH

8510 Prowriter (Par)	439
1550 Prowriter (Par)	689
F-10 Printmaster (Par)	1789

CALL FOR COMPLETE CATALOG ..... IT'S FREE!

ORDER TOLL-FREE!! 1-800-854-2833

TO ORDER: Phone orders invited using Visa, Mastercard, American Express, or bank wire transfers. Visa, MC, and American Express service charge of 2%. Mail orders may send charge card number (include expiration date), cashiers check, money order, or personal check (allow 10 business days for personal or company checks to clear). Please add 3% ($5.00 minimum) for UPS shipping, handling, and insurance. COD's minimum $250.00 with $25.00 deposit. All equipment is in factory cartons with manufacturer warranty. Opened products not returnable. Restocking fee for returned merchandise. Equipment subject to price change and availability. Retail prices differ from mail order prices.
$40.00 min. purchase. *With prepaid cash orders
*Exclude certain printers & monitors & foreign orders.
Calif. residents add 6% State Tax.
For APO and FPO – add 10% ($25.00 min. for postage. Calif. residents add 6% Sales Tax). Include phone number, credit cards not accepted.
Foreign Orders – include 3% handling, shipped air freight collect, credit cards not accepted.

VISA* MasterCard AMERICAN EXPRESS

COMPUTER SPECIALTIES
(619) 579-0330
MAIL TO: 1251 BROADWAY
EL CAJON, CA. 92021

www.americanradiohistory.com

The Panasonic portable computer
We've improved the way

THE Link by Panasonic™

It will improve the way you solve problems. And the solutions come from the portable computing power you have at your fingertips. You can take it with you on planes, cars, boats, anywhere, because it fits into a suitcase. You can be more cost effective in the field, because you'll have access to more information for making on-the-spot decisions. You'll have the incredible advantage of being able to telecommunicate from anywhere you are. It gives you a whole new world of computing. Portable computing.

Software Solutions—Now there's an exciting new software system for the 6502 microprocessor that gives you more solutions to your problems.

The popular language software for the portable computer includes Extended Basic Compiler/Interpreter, SnapFORTH and Microsoft Basic.®

The Panasonic portable computer also has a wide range of specific software programs for your specific problems, such as:

The Scientific Calculator—An incredibly powerful tool that solves mathematical problems for the scientist, engineer, and professional wherever they go.

Portabudget—It's your portable personal financial manager. It gives you up-to-the-minute personal control. It allows you to be your own record keeper, savings advisor, accountant, bill manager, credit and charge account guide, investment counselor, portfolio keeper, and tax assistant. Overall, it helps plan your personal financial life, portably.

Portacalc—Gives you the portability and the flexibility to automatically analyze numerical problems wherever and whenever they arise. You can assess "what if" alternative business problems, comprehend key variables in business, and dynamically analyze problems on engineering projects.

Portawriter—It allows you to write, edit, and format information. And, you can telecommunicate the information from wherever you are. Whether you're in the boardroom, hotel room, or even on a golf course, Portawriter gives you full editing and formatting capability for notes, reports, letters, news copy, tables, lists, forms, orders, you name it.

Portalog—It is an easy, precise tool for time-billing professionals without a minute to lose. Whether you're on the road or in the office, you can log time, compile bills, generate billing reports, and track the work of your highly paid employees. Portalog gives you improved timekeeping productivity.

Telecomputing 2™—It lets you telecommunicate with your data base. You can establish communications between headquarters and field forces. Exchange files and programs between remote stations. Access timesharing services and store data in a large computer's mass storage. You can also upload and download program data.

www.americanradiohistory.com

with a wide range of new software. you solve problems.

Portaflex —A master program that allows you to create solutions for applications, such as:

- *Inventory Control* — Analysis and control of inventory while you're on the job.
- *Order Entry* — A customized system for any sales order entry. It offers you productivity, and the advantage of faster order entry.
- *Field Service* — Retrieve, diagnose, and analyze your field service data wherever you are in the field.
- *Auditing and Accounting* — Custom auditing and accounting, anywhere you are in the field.
- *Estimating* — Versatility for flexible bidding and estimating at your job site.

Software Development Tools for the Customizer — Create your own custom programs and burn them into your EPROM so your program is recorded in nonvolatile form.

Simply take a desk top microcomputer,* insert the software development discs, create your own program, de-bug that program, compile the program, then "burn-in" your problem-solving EPROM.

*Presently offered for Apple II Plus.

Hardware Specifications —
The Panasonic portable computer offers 6502 microprocessor (1 MHz) technology.

- It offers 4K or 8K internal nonvolatile RAM
- 48K internal ROM
- Built-in Ni-Cad rechargeable battery pack
- External AC adapter/recharger
- 26-character liquid crystal display
- 65-key completely redefinable keyboard

Introducing Peripherals for Additional Solutions —
Modular peripherals let you customize your system.

- Multiple RS-232C serial interfaces
- Asynchronous modem with cassette interface (110 or 300 baud)
- 40-character microprinter (thermal dot matrix printing)
- 8K or 16K RAM memory expansion packs
- X-Y, four-color plotter (up to 80 characters per line)
- TV adapter (32 characters X 16 lines with color and graphics)

The Panasonic portable computer. It's improved the way you solve problems. Because we believe its portable modules and multiple software applications can vastly improve your productivity. And that can be an important solution to your profit problems.

The portable computer from Panasonic. We've improved the way you solve problems.

THE Link by Panasonic. It's changing the way the world uses computers.

B-S

Please send me more information. **Dealer Inquiries Invited**

Panasonic Company, Hand-Held Computers
One Panasonic Way, Secaucus, New Jersey 07094

Name *(PLEASE PRINT)* _____

Title & Company _____

Type of Business _____

Address _____

City _____ State _____ Zip _____

Phone Number ( ) _____

Panasonic.
just slightly ahead of our time.

Circle 339 on Inquiry card.

www.americanradiohistory.com

NAPLPS: A New Standard for Text and Graphics

Part 2: Basic Features

How to encode text and simple graphics elements in a standard and efficient manner.

Jim Fleming
Unir Corporation
Suite 106
5987 East 71st St.
Indianapolis, IN 46220

Last month in part 1 of this series we introduced the North American Presentation-Level-Protocol Syntax (NAPLPS, or "nap-lips"), which is an ASCII-like standard that can be used to facilitate the interchange of both textual and graphical information. The graphical information is encoded in a very portable and resolution-independent form, which can be displayed on a large number of suitably equipped display terminals, printers, or plotters.

This month the basic features and specific coding formats of NAPLPS are introduced. The emphasis will be on the set of Picture-Description Instructions (PDIs), around which most of the important features of NAPLPS revolve.

A Picture Is Worth 284 Bytes

The easiest way to explain the detailed coding formats of NAPLPS is to use the simple picture (or frame) shown in figure 1 (on page 164), which illustrates many of the basic NAPLPS features. Listing 1 (pages 154-163) is an annotated version of the NAPLPS codes used to produce this picture. As you can see, although the annotated listing is quite long, the actual coding consists of only 284 bytes.

For the sake of simplicity, this picture was created using the 7-bit form of NAPLPS. As you may remember from last month, NAPLPS can use either 7 or 8 bits. If we had used the 8-bit form, the coding would be even shorter.

Op Codes and Operands

As can be seen in listing 1, a Picture-Description Instruction usually consists of an op code and an operand. The op code specifies a particular function; the optional operand(s) specify the data needed by the function. Figure 2 (on page 166) illustrates the general op code/operand structure used in NAPLPS.

In NAPLPS it is very easy to distinguish between the op codes and the operands. As can be seen, bit 6 is a 0 for an op code and a 1 for an operand. This distinction allows us to have variable-length operands, as long as each operand byte has bit 6 set to a 1. Another nice feature is that if the PDIs are presented in octal form as in listing 1, it is easy to distinguish the operands from the op codes. Octal codes with a first digit of 0 (e.g., 045) are op codes, while a first digit of 1 (e.g., 154) indicates an operand.

Bit 5 will always be a 1 for an op code. This distinguishes op codes from the standard control codes in the C0 set. The lower 5 bits of an op-code byte are used to indicate the particular function. These 5 bits accommodate 32 op codes, which are shown in figure 3. Most of these op codes will be covered in this article.

The operand bytes shown in figure 3 all have bit 6 set to 1. The lower 6 bits (bits 0 through 5) are thus available to encode data, the format of which is dependent on the op code preceding the data.

The 6 bits available in each operand byte can be formatted in a variety of ways. Figure 4 illustrates the four standard operand-encoding formats used in NAPLPS.

The *fixed* format for operand encoding is the simplest and most flexible. (Isn't it interesting that something "fixed" can be "flexible"?) Fixed-format operands are used for small bit fields (6 bits or less) and often contain a few suboperands. For example, in the Text op code (see figure 7), a fixed operand is used to encode the Text Rotation (2 bits: 0, 90, 180, or 270 degrees), Character Path (2 bits: Right, Left, Up, or Down), and Character Spacing (2 bits: 1, 1.25, 1.5, or Proportional). The fixed-format operands are used in most of the

Text continued on page 164

About the Author

Jim Fleming was a member of the original small group of engineers at Bell Laboratories who developed PLP (Presentation-Level Protocol). PLP was later standardized as NAPLPS by the ANSI X3L2.1 committee. He is now an independent consultant specializing in interactive computing systems.

www.americanradiohistory.com

BASF QUALIMETRIC™ FLEXYDISKS®
BUILT FOR ETERNITY - WARRANTED FOR A LIFETIME.

BASF Qualimetric FlexyDisks® offer you more...an extraordinary new lifetime warranty. The BASF Qualimetric standard is a dramatic new international standard of quality in magnetic media...insurance that your most vital information will be secure for tomorrow when you enter it on BASF FlexyDisks today.*

We can offer this warranty with complete confidence because the Qualimetric standard reflects a continuing BASF commitment to perfection...a process which begins with materials selection and inspection, and continues through coating, polishing, lubricating, testing, and 100% error-free certification. Built into our FlexyDisk jacket is a unique two-piece liner. This BASF feature traps damaging debris away from the media surface, and creates extra space in the head access area, insuring optimum media-to-head alignment. The result is a lifetime of outstanding performance.

When your information must be secure for the future, look for the distinctive BASF package with the Qualimetric seal. Call 800-343-4600 for the name of your nearest supplier.

Circle 44 on inquiry card.

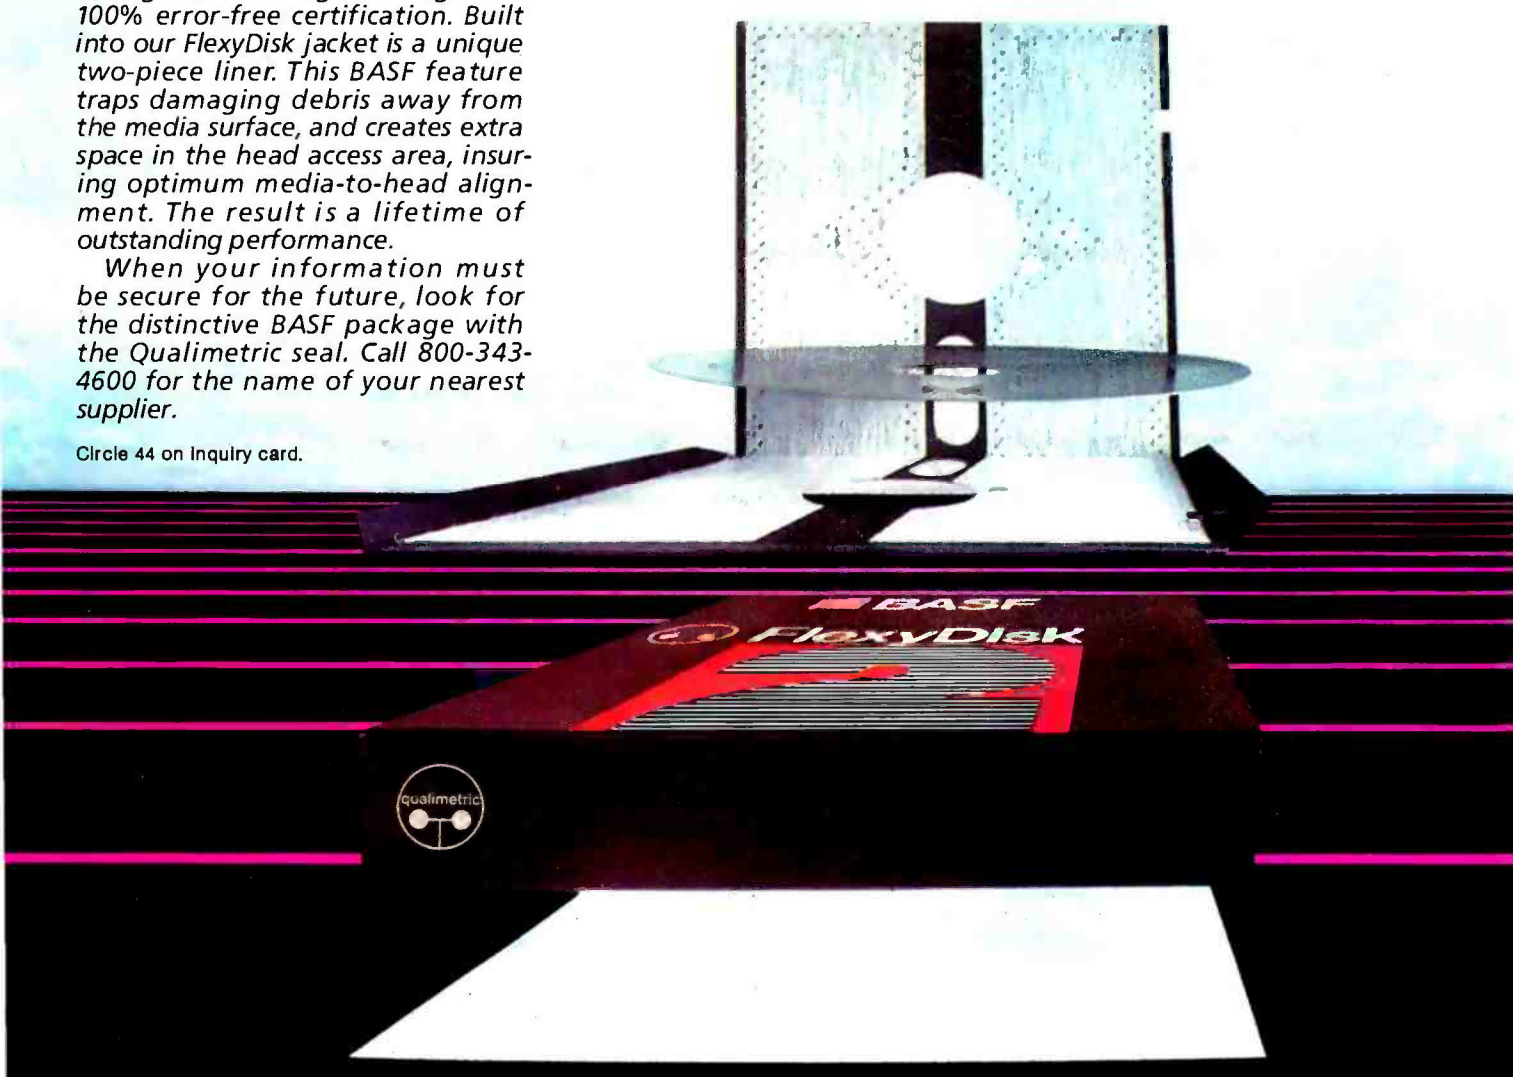

ENTER TOMORROW ON BASF TODAY

BASF

*Contact BASF for warranty details.

© 1982, BASF Systems Corporation, Bedford, MA

www.americanradiohistory.com

ERG/68000

MINI-SYSTEMS

- ☐ Full IEEE 696/S100 compatibility

HARDWARE OPTIONS

- ☐ 8MHz, 10MHz or 12MHz 68000 CPU
- ☐ Memory Management
- ☐ Multiple Port Intelligent I/O
- ☐ 64K or 128K STATIC RAM (70 nsec)
- ☐ 256K Dynamic RAM, with full parity (150 nsec)
- ☐ 8" D/D, D/S floppy disk drives
- ☐ 5MB-40MB hard disk drives
- ☐ Full DMA host adaptor
- ☐ 20MB tape streamer
- ☐ 10 to 20 slot backplane
- ☐ 30 amp power supply

SOFTWARE OPTIONS

- ☐ 68KFORTH[1] systems language with MACRO assembler and META compiler
- ☐ Fast Floating Point package
- ☐ Motorola's MACSBUG
- ☐ IDRIS[2] operating system with C, PASCAL, FORTRAN 77, 68K-BASIC[1] compilers
- ☐ CP/M—68K[3] O/S with C, Assembler, 68K[1]-BASIC, +68K[1]-FORTH

Trademark [1]ERG, Inc.

[2]Whitesmiths [3]Digital Research

30 day delivery with valid Purchase Order

OEM prices available

For CPU, Integrated Card Sets or Systems.

Empirical Research Group, Inc.
P.O. Box 1176
Milton, WA 98354
206-631-4855

Listing 1: *An annotated listing of NAPLPS codes used to produce the designs in figure 1. Note that each byte is given in its octal form. This makes it easy to distinguish op codes (first digit = 0) from operands (first digit = 1). Coordinates are described in terms of both their fractional form and their equivalent form for a 256 by 256 screen. For example, in lines 11–13 the coordinates (0.375,0.25) are equivalent to (96,64) on a 256 by 256 grid. The notation (dx,dy) refers to coordinates relative to the present drawing point.*

```
Byte  Octal Symbolic
 No.   Form   Form     Description
-----------------------------------------------------------------
        .
        .      Get ready for graphics (7 Bit Mode)
        .
  1    016     SO      Select G1 (PDI Graphics)
        .
        .      Set color to BLUE
        .
  2    074     SET     Set Color
  3    111     BLU     X100B00B
        .
        .      Draw the sky by clearing
        .      the screen to the current color (BLUE)
        .
  4    040     RES     Reset
  5    120             Clear screen to current color
        .
        .      Change color to GREEN
        .      for the grass
        .
  6    074     SET     Set Color
  7    144     GRN     X1G00G00
        .
        .      Make sure polygons are not highlighted
        .      or textured
        .
  8    043     TEX     Texture
  9    100             Solid areas, lines and no highlight
        .
        .      Draw the grass
        .
 10    067     SPF     Set Polygon Filled
 11    111             }
 12    140             } - (x,y) = (.375,.25) => (96,64)
 13    100             }
        .
 14    110             }
 15    140             } - (dx,dy) = (+.375,+.0) => (+96,+0)
 16    100             }
        .
 17    110             }
 18    102             } - (dx,dy) = (+.25,+.0625) => (+64,+16)
 19    100             }
        .
 20    106             }
 21    106             } - (dx,dy) = (+.0,-.3125) => (+0,-80)
 22    100             }
        .
 23    140             }
 24    100             } - (dx,dy) = (-1.0,+.0) => (-256,+0)
 25    100             }
        .

 26    100             }
 27    106             } - (dx,dy) = (+.0,+.21484375) => (+0,+55)
 28    107             }
        .
 29    100             }
```

Listing 1 continued on page 156

www.americanradiohistory.com

FREE with software purchase— One CPM Handbook

DISCOUNT SOFTWARE

✓ = New items

ASHTON-TATE
dBASE II. . . .call for price ($4??)

CP/M®

ARTIFICIAL INTELLIGENCE®
Medical(PAS-3). $849
Dental (PAS-3). $849

ASYST DESIGN®/ FRONTIER
Prof Time Accounting. $549
General Subroutine. $269
Application Utilities. $439

DIGITAL RESEARCH®
CP/M 2.2®
NorthStar. $149
TRS-80 Model II (P+T). $159
Micropolis. $175
CP/M-Intel MDS. $135
✓ PL/1-80. . . . . $449
BT-80. . . . . $179
MAC. . . . . $ 85
RMAC. $179
Sid. . . . . $ 65
Z-Sid. . . . . $ 90
Tex. . . . . $ 90
DeSpool. . . . . $ 49
CB-80. . . . . $459
CBasic-2. . . . . $ 98
Link-80. . . . . $ 90

FOX & GELLER
Quickscreen. $135
Quickcode. $265
dutil. . . . . $ 65

MICRO-AP®
S-Basic. $269
Selector IV. $295
Selector V. $495

MICRO DATA BASE SYSTEMS®
HDBS. $269
MDBS. $795
DRS or QRS or RTL. $269
MDBS PKG. $1999

MICROPRO®
✓ WordStar. $279
Customization Notes. $449
Mail-Merge. . . . . $ 99
WordStar/Mail-Merge. $369
DataStar. $249
WordMaster. $119
SuperSort I. $199
✓ Spell Star. $139
CalcStar. $259

MICROSOFT®
✓ Basic-80. . . . . $199
Basic Compiler. $329
Fortran-80. . . . . $349
Cobol-80. . . . . $589
M-Sort. $175
Macro-80. . . . . $144
Edit-80. . . . . $ 84
MuSimp/MuMath. $224
MuLisp-80. . . . . $174
FPL: Bus. Planner. $595

ORGANIC SOFTWARE®
TextWriter III. $111
DateBook II. $269
Milestone. $269

OSBORNE® (McGraw/Hill)
General Ledger. . . . . $ 59

SAVE $255 ON PRODUCTIVITY PAC #3!

Everything you need: a wordprocessor, spreadsheet and database. And a phenomenally low, low price!

	Retail	Regular Discount
Final Word	$300	$270
Plannercalc	$ 99	$ 50
Condor I	$295	$275
	$694	$595

SPECIAL COMBINATION PRICE: $439
Offer good to the end of the month of publication of this magazine. Call for our other PAC prices.

Acct Rec/Acct Pay. . . . . $ 59
Payroll w/Cost. . . . . $ 59
All 3. . . . . $129
All 3 + CBASIC-2. . . . . $199
Enhanced Osborne (vandatta) (Includes CBasic). $269

PEACHTREE®
General Ledger. $399
Acct Receivable. $399
Acct Payable. $399
Payroll. $399
Inventory. $399
Surveyor. $399
Property Mgt. $799
CPA Client Write-up. $799
P8 Version. . . . . Add $234
MagiCalc. $269
Other. . . . . less 10%

STAR COMPUTER SYSTEMS
✓ G/L, A/R, A/P, Pay. . . . . $ 349
All 4. . . . . $1129
Legal Time Billing. . . . . $ 849
Property Mngmt. . . . . $ 849

STRUCTURED SYSTEMS®
Business Packages. Call for Price

SORCIM®
✓ SuperCalc. $249
Trans 86. . . . . $115
Act. $157

SUPERSOFT®
Ada. $270
Diagnostic I. . . . . $ 49
Diagnostic II. . . . . $ 84
Disk Doctor. . . . . $ 89
Forth (8080 or Z80). $149
Fortran. $219
Fortran w/Ratfor. $289
C Compiler. $225
Star Edit. $189
Scratch Pad. $266
StatsGraph. $174
Analiza II. . . . . $ 45
Dataview. $174
Disk Edit. . . . . $ 89
Encode/Decode II. . . . . $ 84
Optimizer. $174
Super M List. 68
Term II. $179
Zap Z-8000. . . . . $450
Utilities I. . . . . $ 54
Utilities II. . . . . $ 54

ACCOUNTING PLUS
1 Module. $385
4 Modules. $1255
All 8. . . . . $4500

UNICORN®
Mince. $149
Scribble. $149
Both. $249
The Final Word. $270

WHITESMITHS®
"C" Compiler. $600
Pascal (incl "C"). $850

"PASCAL"
✓ Pascal/MT + Pkg. $429
Compiler. $315
Sp Prog. $175
Pascal/Z. $349
Pascal/UCSD 4.0. . . . . $670
Pascal/M. $355
Tiny Pascal. . . . . $ 76

"DATA BASE"
FMS-80. . . . . $894
dBASE II. $595
✓ Condor I. $275
Condor II. $535
FMS-81. . . . . $445

"WORD PROCESSING"
WordSearch. $179
✓ SpellGuard. $199
Peachtext. $289
Magic Spell. $269
Spell Binder. $349
Select. $495
The Word. . . . . $ 65
The Word Plus. $145
Palantier-I (WP). $385

"COMMUNICATIONS"
Ascom. $149
BSTAM. $149
BSTMS. $149
Crosstalk. $139
Move-it. . . . . $ 89

"OTHER GOODIES"
Micro Plan. $419
Plan 80. . . . . $269
Target (Interchange). $125
Target (Planner). $189
Target (Task). $299
Plannercalc. . . . . $ 50
Tiny "C". . . . . $ 89
Tiny "C" Compiler. $229
Nevada Cobol. $179
MicroStat. $224
Vedit. $130
MiniModel. $449
StatPak. $449
Micro B+. $229
Raid. $224
String/80. . . . . $ 84
String/80(source). $279
ISIS CP/M Utility. $199
Lynx. $199
Supervyz. . . . . $ 95
ATI Power. . . . . $ 75
Mathe Magic. . . . . $ 95
CIS COBOL. $765
ZIP MBASIC, CBASIC. $129
Real Estate Analysis. $116

APPLE II®

BRODERBUND
G/L (with A/P). $444
Payroll. $355

INFO UNLIMITED®
EasyWriter (Prof). $155
Datadex. $129
EasyMailer (Prof). $134
Other. . . . . less 15%

MICROSOFT®
✓ Softcard (Z-80 CP/M). $239
Fortran. $179
Cobol. $499
Tasc. $139
✓ Premium Package. $549
✓ RAM Card. $129

MICROPRO®
✓ Wordstar. $199
MailMerge. . . . . $ 99
Wordstar/MailMerge. $349
SuperSort I. $159
Spellstar. $129
CalcStar. $175
DataStar. $265

VISICORP®
✓ Visicalc 3.3. . . . . $189
Desktop/Plan II. $219
Visiterm. . . . . $ 90
Visidex. $219
Visiplot. $180
Visitrend/Visiplot. $259
Visifile. $219
Visischedule. $259

PEACHTREE®
G/L, A/R, A/P, Pay or Inventory (each). $224
Peach Pack P40. . . . . $795

SOFTWARE DIMENSIONS, INC.
Accounting Plus II, G/L, AR, AP, or Inventory (each). $385
(Needs G/L to run)

"OTHER GOODIES"
Super-Text II. $127
Data Factory. $134
DB Master. $184
Versaform VS1. . . . . $350
VH1. . . . . $445

16-BIT SOFTWARE

WORD PROCESSING
IBM PC
✓ Wordstar. $279
✓ Spellstar. $175
Mailmerge. $109
Easywriter. $314
Easyspeller. $159
Select/Superspell. $535
Write On. $116
Spellguard (also available for 8" 8086 systems). $229
SP Law (for Spellguard). $115
Textwriter III. $189
Spellbinder. $349
Final Word. $270

LANGUAGE UTILITIES
IBM PC
Crosstalk. $174
BSTAM. $149
BSTMS. $149

8" 16-BIT SYSTEMS
✓ Pascal MT+ /86, SSP. $679
CBasic 86. . . . . $294
Pascal M/86. . . . . $445
Act 86. . . . . $157
Trans 86. . . . . $115
XLT 86. . . . . $135

16-BIT 8" AND DISPLAYWRITER
CP/M 86. . . . . $294
MP/M 86. . . . . $585

OTHERS
IBM PC
SuperCalc. $269
VisiCalc. $219
Easyfiler. $359
Mathemagic. . . . . $ 89
CP/M Power. . . . . $ 65
Condor 21. . . . . $265
Condor 22. . . . . $535
Condor 23. . . . . $895
Condor 20Q. $175
Condor 20R. $265
Statpak. $449
Optimizer. $174
Desktop Plan II. $219
Desktop Plan III. $259
Visidex. $219
Visitrend. $259
Many others available for use with the "Baby Blue Board®"

8" 16-BIT SOFTWARE
SuperCalc. $269
CP/M Power. . . . . $ 65

FORMATS AVAILABLE:

8" single density
8" OSI
Superbrain
Micropolis/Vector Graphic
NorthStar Horizon
NorthStar Advantage
Osborne
Heath/Zenith
Cromemco
Televideo
Xerox 820
Dynabyte
Hewlett-Packard 125
NEC
Eagle
Apple II/III
Otrona
TRS-80 Model I/II/III
DEC VT-180
Altos
CP/M-86
IBM PC

LOWER PRICES, COME HELL OR HIGH WATER.

ORDERS ONLY • CALL TOLL FREE • VISA • MASTERCHARGE
U.S. 1-800-421-4003 • CALIF. 1-800-252-4092

Outside Continental U.S.—add $10 plus Air Parcel Post • Add $3.50 postage and handling per each item • California residents add 6½% sales tax • Allow 2 weeks on checks. C.O.D. $3.00 extra • Prices subject to change without notice. All items subject to availability • ®—Mfgs. Trademark. Blue Label $3.00 additional per item.

CP/M is a registered trademark of DIGITAL RESEARCH, INC.

THE DISCOUNT SOFTWARE GROUP
6520 Selma Ave. Suite 309 • Los Angeles, Ca. 90028 • (213) 837-5141
Int'l TELEX 499-0446 DISCSOFT LSA • USA TELEX 194-634 (Attn: 499-0446)
TWX 910-321-3597 (Attn: 499-0446)

Circle 152 on Inquiry card.

www.americanradiohistory.com

Circle 347 on Inquiry card.

P&T CP/M®2 is GROWING

TRS-80 MODEL II
$185
Still the best CP/M for the Mod II with features like 596 Kb per diskette, type ahead, full serial port support, and more.

TRS-80 MODEL 16
$220
Includes full support for thinline drives, gives 1.2 Mb per diskette for the Mod 16 (Z-80 mode) and Mod II's with double sided drives.

RADIO SHACK HARD DISK
$250
Includes all the features of P&T CP/M 2 plus 8.7 Mb per hard disk drive.

CAMEO HARD DISK
Support for the standard Cameo hard disk system ($250) or the multiplexer (for multiple computers) system $400.

CORVUS HARD DISK
$250
Support for a 5, 10, or 20 Mb Corvus hard disk system.

Start with a Model II floppy system and grow into a hard disk. Since all P&T CP/M 2 systems are fully compatible, you will have no conversion worries.

Special note: P&T hard disk systems allow you the user to configure logical drive assignments to your specifications. Write for more details.

Prepaid VISA, M/C, or COD orders accepted. All prices FOB Goleta and subject to change.

CP/M is a registered trademark of Digital Research. TRS-80 is a trademark of Tandy Corp.

PICKLES & TROUT
P.O. BOX 1206
GOLETA, CA 93116
(805) 685-4641

Listing 1 continued:

```
30    152            ) - (dx,dy) = (+.171875,+.0625) => (+44,+16)
31    140            )
        .
        .      Change to RED
        .
32    074      SET     Set Color
33    122      RED     X1OROORO
        .
        .      Make sure highlighting is on
        .
34    043      TEX     Texture
35    104
        .
        .      Draw the house
        .
36    044      SPA     Point Set Absolute
37    110            )
38    127            ) - (x,y) = (.3125,.234375) => (80,60)
39    104            )
        .
40    061      REF     Rectangle Filled
41    100            )
42    174            ) - (dx,dy) = (+.21875,+.125) => (+56,+32)
43    100            )
        .
        .      Draw the roof
        .
44    045      SPR     Point Set Relative
45    170            )
46    104            ) - (dx,dy) = (-.234375,+.125) => (-60,+32)
47    140            )
        .
48    074      SET     Set Color
49    100      BLK
        .
50    065      POF     Polygon Filled
51    100            )
52    141            ) - (dx,dy) = (+.125,+.05859375) => (+32,+15)
53    107            )
        .
54    107            )
55    146            ) - (dx,dy) = (+.125,-.0625) => (+32,-16)
56    101            )
        .
        .      Label the "House"
        .
57    045      SPR     Point Set Relative
58    107            )
59    125            ) - (dx,dy) = (+.078125,-.078125) => (+20,-20)
60    144            )
        .
61    017      SI      Select G0 (ASCII Text)
        .
        .      "House"
        .
62    110      H
63    157      o
64    165      u
65    163      s
66    145      e
        .
        .      Back to graphics
        .
67    016      SO      Select G1 (PDI Graphics)
        .
        .      Set color to CYAN (Light Blue)
        .
68    074      SET     Set Color
69    155      CYN     X1GOBGOB
        .
        .      Label "BIRDS" before drawing them
```

Listing 1 continued on page 159

www.americanradiohistory.com

CP/M® IBM® APPLE® PRICE WAR!

WordStar®	dBASE II™	SuperCalc™	Multiplan™	Perfect Writer™
$299	$489	$189	$199	$199

WordStar® MailMerge™	WordStar® dBASE II™	VisiCalc®	SuperWriter™	InfoStar™
$429	$749	$189	$249	$299

ASPEN SOFTWARE™		Financial Management Series	CALL	Enhancer II (Videx™)	$119	**SILICON VALLEY SYSTEMS™**	
Grammatik	$ 60	**MICROPRO®**		Basic 80	$275	Word Handler	$149
Random House Proofreader	$ 39	WordStar	$289	Basic Compiler	$295	List Handler	$129
Random House Thesaurus	$119	MailMerge	$149	**MICROSTUF™**		**SOFTWARE PUBLISHING™**	
Univ. of Chicago Manual of Style	$119	WordStar/MailMerge	$389	Crosstalk	$135	PFS: File	CALL
ASHTON-TATE™		WordStar/MailMerge/SpellStar	$529	**PERFECT SOFTWARE™**		Other Products	CALL
dBase II	$489	WordStar/InfoStar	$549	Perfect Writer	$199	**SORCIM™**	
CONTINENTAL SOFTWARE™		InfoStar	$299	Perfect Speller	$129	SuperCalc	$189
Home Accountant	CALL	CalcStar	$ 89	Perfect Writer/Speller	$309	SuperWriter	$249
DIGITAL RESEARCH™		DataStar	$179	Perfect Calc	$139	SpellGuard	$129
CBASIC	$ 99	SuperSort	$149	Perfect File	$249	**TCS ACCOUNTING™**	
FOX AND GELLER™		SpellStar	$149	All Four Perfect Products	$649	General Ledger	$ 99
Quickcode	$229	ReportStar	$229	**PICKLES AND TROUT™**		Accounts Payable	$ 99
dUtil	$ 69	DataStar Update	CALL	CP/M for TRS Model II	$169	Accounts Receivable	$ 99
IUS™		**MICROSOFT™**		CP/M for TRS Model 16	$189	Payroll	$ 99
Easywriter II	$239	Multiplan	$199	Hard Disk	CALL	All Four Above	$289
Easyspeller II	$139	Softcard	$259	**OASIS™**		Inventory Management	$ 99
Easyfiler	$269	Ram Card	$ 89	The Word Plus	$129	**VISICORP®**	
		All Three Above	$509	Punctuation and Style	$109	VisiCalc	$189
		Videoterm (Videx™)	$269			All Other VisiCorp Products	CALL

NOW, PAY LESS, AND GET GREAT SERVICE, TOO!

If you're looking for rock-bottom prices *and* fast, personal service, take a close look at 800-SOFTWARE.

Because we buy in volume, we're able to sell the products you want at prices that finally make some sense. But don't take our word for it. Compare prices and see for yourself!

OUR SERVICE CAN'T BE BEAT.

We take care of you like our business depends on it. Because it does.

When you call 800-SOFTWARE, you get the fastest delivery available anywhere. Which means that every order is filled the day we get it. And that our unique Order Tracking System™ is on the job, keeping tabs on your order, every step of the way.

Our giant inventory—one of the largest in the United States—also assures you of the fastest possible service. Everything's in stock so you don't have to wait.

Technical support? Business software expertise? We've got it—and it's the best you'll find *anywhere*.

But, put us to the test. Let us prove what we've proven to satisfied customers around the world.

That our prices *are* lower. That our service *is* better. That there really and truly *is* a difference.

We look forward to your call.

FREE GIFT!

GET 4 FLOPPY DISKETTES FREE WITH ANY PURCHASE, IF YOU ACT NOW!

- ☐ Your choice of 5¼" or 8"
- ☐ Brand new and brand name

TO ORDER, CALL TOLL-FREE:

800-227-4587

In California, 800-622-0678
or 415-644-3611
CA residents add sales tax.

OR WRITE:
800-SOFTWARE, INC.
3120 Telegraph Avenue,
Berkeley, CA 94705

VISA MasterCard AMERICAN EXPRESS

- ☐ Purchase orders accepted
- ☐ Prompt UPS 3 day Blue Label service
- ☐ Call for shipping charges and our other low software prices.
- ☐ Now open Monday through Saturday.
- ☐ Dealer and quantity discounts available.
- ☐ Prices may change.

©Copyright 800-Software 1983

Circle 2 on Inquiry card.

www.americanradiohistory.com

SUPER BARGAINS

ACE 1000 COLOR
COMPUTER! ..... List $1545
SHARP COMPUTER 249



SUPERBRAIN II

Double Density 1894
Quad Density 2274
Super Density SD 2649
COMPUSTARS
TO DEALERS ..... CALL & SAVE

Advanced Micro Digital S-100 Super-Quad Single Board Computer. Z80 64K RAM, Disk Controller, RS-232 ..... Only 699

ALTOS — single and multi-user
ACS-8000-15D ..... List 5990
Only 4699

ATARI 400 289
800 655

PRINTERS

OKIDATA 82A 489
CENTRONICS 739-1 499
IDS PRISM 80 743

EPSON MX-80 FT 547
MX-80 459
MX-100 749

ANADEX 9501A
Silent Scribe 1345
NEC #3510 Letter Quality 1623
C. ITOH F10 Letter Quality 1399
Smith Corona TP-1 595

TRAXX 5¼" Add-on Drives 249

Memory Merchant 16K static ... 159
Central Data RAM S-100 64K ... 299
Systems Group
RAM S-100 64K 449
Microangelo Video Graphics 715

AMERICAN SQUARE COMPUTERS is organizing a World Wide Association of Computer Dealers. Open a Store or Start Work Out of Your Home! We Charge NO FRANCHISE FEE! (Our Competitors charge a FRANCHISE FEE of from $15,000.00 to $45,000.00.) Be a Winner! Let US help YOU get started MAKING MONEY by HELPING PEOPLE to put COMPUTERS to WORK. Write or Phone today.

Which Computers are Best? ... Free

Insured Shipping at Low Rates.

We Repair Computers

TELEVIDEO

Televideo 910+ 518
Televideo 925 718
Televideo 950 899
Televideo Computers Call

ADDS VIEWPOINT A-1B 469
ZENITH Z-19 Terminal 649
Z-89 48K Computer 2119
Z-90 64K DD 2399
ZVM-121 ZENITH
Green Screen monitor 125

INTERTUBE III
or EMULATOR $710
AMDEK Color Monitor $329

GODBOUT COMPUPRO
Super Sixteen 8085/8088. The fastest 8-16 bit computer! Runs 8 and 16 bit code! 128K Static RAM, 6MHz CPU's
LIST 3440 SPECIAL 2569

New: Systems 816/A, B, and C with enclosure and drives.
816/A .... List 5495 .... Only 4395

SEATTLE pure 16 bit computer is the fastest microcomputer by actual test! S-100. 128K Static RAM, 8 MHz 8086. 22 slot Mainframe
Model #2 ..... List 3785 Only $3028
#1 as above
but 64K ..... List 2990 Only $2392

IBM PC memory made by SEATTLE.
Now with "Flash Disk." .. 192K = 697
64K = 427

CALIFORNIA COMPUTER 2210A
List $1995 ..... Only $1595
Z80, 64K, I/O, Disk controller + CPM. California main frame 484

SYSTEMS GROUP computers run FRIENDLY OASIS Call ..... SAVE

QUAY COMPUTER
Two drives + CPM $1745
Four user MPM 208K +
Hard Disk $5945

TARBELL'S
Empire I & II have two 8" disk drives. The I is single sided, the II is double sided.
FREE Business Software
Empire I ... List 4888 ... Only 3495

Corvus Hard Disk ..... SAVE
SSM Video BRD VB3 kit 361
Spectrum Color ASM 223

One hour free troubleshooting on business systems.

NORTH STAR
ADVANTAGE 64K Green Phosphor. The Best Business Graphics, 2 Disks. Serial Port. Options CPM — Business programs $2894



NORTH STAR Horizon
Powerful North Star BASIC Free
Superb for Business & Science
Free Secretary Word Processor

Horizon Standard is now HRZ-2-64K Quad

Factory Assembled & Tested	Only
Horizon-2-64K-Quad	$2894
Horizon-1-64K-QHD 5	3999
Horizon RAM 64K	594
Big Sale on Multi-User Time-Sharing	SAVE
North Star Hard Disk 18Mb	4295
English to Basic Translator	75
Zbasic 2 to 5 times faster!	325
Secretary Word Processor	69
Wordstar Word Processor	278
Floating Point Board	699
Oasis	699
CPM for N*-Extra features	147
Micro Mike Software	CALL
MICROSTAT	$355
Pascal-80	539
Extra Precision BASIC	49
Northword	179
Infomanager	329
General Ledger	399
Accounts Receivable	399
Accounts Payable	399
Inventory	399
Order Entry	399
PROPAC	1299
DOS + BASIC 5.2	28

INTEGRAND mainframes S-100. Many models to choose from
Only 200 & UP

MODEMS

DC HAYES — S-100 ..... $329
POTOMAC MICRO MAGIC 369
SIGNALMAN 97
CAT NOVATION 159
AUTOCAT 215

Full Time Graduate Technician on Duty.



MICRO DECISION
"A DEAL YOU CAN'T REFUSE"
64K RAM, Z80, 4MHz, 2 Serial Ports, Disk Controller. FREE SOFTWARE: CPM — Microsoft BASIC — BaZic —Wordstar—Logicalc—Correct-It.

	List	Only
with 1 5¼" Disk ..	$949	... $1049
with 2 5¼" Disks ..	1545	... 1400

DECISION I

"The IBM-360 on the Z-80 & S-100 BUS!"

Sixteen Programs running simultaneously! Free CPM, Microsoft BASIC, and WORDSTAR with complete system!

DECISION 1 + 65K Static + 8" Disks DMA 3403
DECISION 1 + 65K Static + 2 5¼" Disks 2795
DECISION 1 + 65K Static + 5" Disk + 5 Mb Hard Disk 4235
DECISION 1- 2user 256K Static + 5" Disk + 5 Mb Hard Disk + MICRONIX 5830
DECISION 1 — Z-80 + I/O + 65K 1915
DECISION 1 — Rackmount + 20 Mb
HD - 8" DRV ..... Reg. 6235
Inventory Sale 5415

MORROW Hard Disks up to 26 MEGABYTES

HDC-M26 ..... $3333
HDC-M20 3333
HDC-M10 2955
DMA-M5 ..... Reg. 1775
Inventory Sale 1400
DMA-M10 2235
DMA-M16 2795

MORROW 8" Disk
Discus 2D + CPM 600K .. Only $834
Discus 2 + 2 + CPM 1.2 Mb 1068
Add Drives 2D = 599 2 + 2 = 1795
Discus 2D dual + CPM ... Only 1384
Free Microsoft BASIC from MORROW with Discus system or hard disk.

FAST FIGURE — Most powerful spread sheet. 5¼" or 8" 99

Wordstar 278
All MicroPro Software for IBM, Apple, North Star, Morrow, etc. SAVE! CALL

Call for latest prices & availability **Factory Guarantees** **We Beat Prices**

AMERICAN SQUARE COMPUTERS

919-889-4577 4167 Kivett Dr. Jamestown N.C. 27282 919-883-1105

Circle 22 on inquiry card.

www.americanradiohistory.com

Listing 1 continued:

```
      .
 70   044      SPA      Point Set Absolute
 71   102               )
 72   150               ) - (x,y) = (.15625,.52734375) => (40,135)
 73   107               )
      .
 74   017      SI       Select G0 (ASCII Text)
       .
       .       "BIRDS"
      .
 75   102      B
 76   111      I
 77   122      R
 78   104      D
 79   123      S
       .
       .       Back to Graphics
      .
 80   016      SO       Select G1 (PDI Graphics)
       .
       .       Draw bird with black wing tips
      .
 81   057      SAF      Set Arc Filled
 82   101               )
 83   167               ) - (x,y) = (.1953125,.46875) => (50,120)
 84   120               )
      .
 85   107               )
 86   107               ) - (dx,dy) = (+.015625,-.015625) => (+4,-4)
 87   144               )
      .
 88   107               )
 89   107               ) - (dx,dy) = (+.0078125,-.015625) => (+2,-4)
 90   124               )
      .
 91   055      ARF      Arc Filled
 92   100               )
 93   100               ) - (dx,dy) = (+.0078125,+.015625) => (+2,+4)
 94   124               )
      .
 95   100               )
 96   100               ) - (dx,dy) = (+.0234375,+.0234375) => (+6,+6)
 97   166               )
       .
       .       Draw bird without black wing tips
      .
 98   043      TEX      Texture
 99   100
      .
100   045      SPR      Point Set Relative
101   100               )
102   111               ) - (dx,dy) = (+.03515625,+.0390625) => (+9,+10)
103   112               )
      .
104   055      ARF      Arc Filled
105   107               )
106   107               ) - (dx,dy) = (+.015625,-.015625) => (+4,-4)
107   144               )
      .
108   107               )
109   107               ) - (dx,dy) = (+.0078125,-.015625) => (+2,-4)
110   124               )
      .
111   055      ARF      Arc Filled
112   100               )
113   100               ) - (dx,dy) = (+.0078125,+.015625) => (+2,+4)
114   124               )
      .
115   100               )
116   100               ) - (dx,dy) = (+.0234375,+.0234375) => (+6,+6)
117   166               )
```

Listing 1 continued on page 161

Get the total picture.

Improve your present computer system with a high-resolution color monitor from NEC.

NEC's JC-1203 gives you the highest resolution you can get in a color monitor. And it can reproduce as many different colors and shades as the best microcomputers can generate. Compatible with a wide variety of computers, including IBM,* Zenith,* H-P,* and others, including NEC's own PC-8000 and PC-8800.

Compare these specs with your present monitor:

12-inch diagonal screen

RGB input signal with TTL level

Switchable Pos/Neg display characters

80-character, 25-line display

690 (H) x 230 (V) resolution

8x8 dots, 8mHz video bandwidth

*Special interface required

Productivity at your fingertips

NEC

NEC Home Electronics (U.S.A.), Inc.
Personal Computer Division
1401 Estes Avenue
Elk Grove Village, IL 60007
(312) 228-5900

Nippon Electric Co., Ltd., Tokyo, Japan

Circle 303 on Inquiry card. ⟶

www.americanradiohistory.com

IT'S INCREDIBLE

Hard Disk Portable With Software for the Price of Its 10MB Alone.

No matter how you look at it, KAYPRO is the best value you'll see anywhere.

You get a powerful computer — engineered and built in America with 10MB hard disk, 200K floppy disk, two RS-232C serial and one parallel port, 9" screen of 80 columns by 24 lines, and detachable keyboard with 10 key pad.

Also included are CP/M 2.2, word processing, spread sheet and more. All for $2795. Backed by a 90 day warranty and supported nationally. Act now. Send coupon today.

$2795

KAYPRO

Yes, I know a good deal when I see one.
Send me the KAYPRO 10. My: ☐ check for
$2795 is enclosed ☐ VISA ☐ MC ☐ AE

Acct. #

AE valid _____ thru _____
VISA, MC expires _____

Name _____
Address _____
City _____
State/Zip _____

Signature _____

CONTINUUM. 21006 Devonshire St.,
Chatsworth, California 91311. (213) 998-8766

(800) 624-3089 outside CA **(800) 624-3090** inside CA

Circle 120 on Inquiry card.

www.americanradiohistory.com

Listing 1 continued:

```
        .
        .       Draw Cloud
        .
118   044       SPA       Point Set Absolute
119   122                 )
120   160                 ) - (x,y) = (.6875,.5) => (176,128)
        .
121   074       SET       Set Color
122   177       'WHT      X1GRBGRB
        .
123   055       ARF       Arc Filled
124   170                 )
125   170                 ) - (dx,dy) = (-.015625,+.0234375) => (-4,+6)
126   146                 )
        .
127   100                 )
128   110                 ) - (dx,dy) = (+.04296875,+.01171875) => (+11,+3)
129   133                 )
        .
130   055       ARF       Arc Filled
131   100                 )
132   110                 ) - (dx,dy) = (+.03125,+.02734375) => (+8,+7)
133   107                 )
        .
134   107                 )
135   107                 ) - (dx,dy) = (+.0234375,-.01171875) => (+6,-3)
136   165                 )
        .
137   055       ARF       Arc Filled
138   100                 )
139   121                 ) - (dx,dy) = (+.06640625,+.03515625) => (+17,+9)
140   111                 )
        .
141   107                 )
142   105                 ) - (dx,dy) = (+0.0,-.078125) => (+0,-20)
143   104                 )
        .
144   055       ARF       Arc Filled
145   177                 )
146   157                 ) - (dx,dy) = (-.08203125,-.01953125) => (-21,-5)
147   133                 )
        .
148   170                 )
149   150                 ) - (dx,dy) = (-.06640625,+.01171875) => (-17,+3)
150   173                 )
        .
151   065       POF       Polygon Filled
152   100                 )
153   101                 ) - (dx,dy) = (+.02734375,+.03515625) => (+7,+9)
154   171                 )
        .
155   100                 )
156   110                 ) - (dx,dy) = (+.0546875,+.015625) => (+14,+4)
157   164                 )
        .
158   107                 )
159   126                 ) - (dx,dy) = (+.06640625,-.04296875) => (+17,-11)
160   115                 )
        .
        .       Label "CLOUD"
        .
161   045       SPR       Point Set Relative
162   170                 )
163   142                 ) - (dx,dy) = (-.1171875,+.078125) => (-30,+20)
164   124                 )
        .
165   017       SI        Select G0 (ASCII Text)
        .
        .       "CLOUD"
        .
166   103       C
167   114       L
```

Listing 1 continued on page 162

Circle 304 on inquiry card. →

Get the picture that's worth more than a thousand words.

Make your present system easier to look at with a monitor from NEC.

NEC's JB-1260 combines good looks and high quality with a very attractive price. Special dark bulb goes extra easy on your eyes. Use with Apple® II, Apple II+, Apple III,* Osborne,* and many others, including NEC's own PC-8800, PC-8000, and NEC TREK™ (PC-6000).

Compare these specs with your present monitor:

12-inch diagonal screen

8x8 dots

15mHz video bandwidth

80-character, 25-line display

90-degree deflection

600 (H) x 230 (V) lines

*Special interface required

Productivity at your fingertips

NEC

NEC Home Electronics (U.S.A.), Inc.
Personal Computer Division
1401 Estes Avenue
Elk Grove Village, IL 60007
(312) 228-5900

Nippon Electric Co., Ltd., Tokyo, Japan

www.americanradiohistory.com

Circle 227 on Inquiry card.

Opt for Quality
High-Reliability Design

Model HS-2900

Intelligent Buffer
Standard $348.00
RS-232C Add $120.00
IEEE-488 Add $160.00
• 62KB STANDARD • Data compressinon/copy mode • Self test mode • Centronics I/F standard • RS-232C, IEEE-488 optional • Low price • AC 100/117/220/240V

Model SBC-696

Single Board Computer meeting IEEE-696 (CP/M, SB-80) $999.00
• Z80A • 64K static RAM (ROM replacable) • RS-232C 2port Centronics 1port • Supports 5" 8" floppy by DMA • Meets IEEE S-100 bus • +5V only • 4 layered PCB • Memory card piggy-back on main board • Include CP/M or SB-80

Model SBC-488

Single Board Computer (IEEE-488 etc)
$488.00
• Z80 • ROM/RAM total 10KB • IEEE-488 I/F (TMS9914) • RS-232C I/F (8251) • Parallel 6ports (8255) • +5V only

Model GPIB-100

S-100 bus Multifunction Board meeting IEEE-488
$550.00
• Supports IEEE-488 (TMS9914) • Universal interrupt controller (AM9519) • Programmed interval timer (8253) • Real-time clock, battery back-up (MSM5832) • IEEE-S-100 I/F • Software handler on 8" diskette (CP/M based)

Model CAP-M20GP

Intelligent Winchester Disk
$6,200.00
• 8" Winchester disk, maintenance free • IEEE-488, RS-232C (up to 38,400 baud) • Intelligent functions • Supports CP/M based driver • 430(W)×150(H)×450(D)% • AC100/117/220/240V

Model F2P/F2

New 8" FD for CROMEMCO and general-purpose system
F2P $2,580.00
F2 $1,990.00
• Ultra-slim 8" drive • Signal compatible Persci 299 • No modification of the CDOS of your CROMEMCO is needed (F2P) • Fully compatible with Shugart SA801R and 850R (F2) • Cooling fan, noisefilter included • 160 (W)×225 (H)×500 (D)%

ALL PRICES ARE FOB TOKYO AND SUBJECT TO CHANGE WITHOUT NOTICE (Dealer inquiries invited)

International Agent : RENFUL COMPUTER LTD.
Rm.602, HoP Fat Commercial Centre, 490-492, Nathan Road, Kowloon, H.K. Tel : 3-320498(3lines)
Telex : 37548 RENFL HX Cable Address : RENFULCOMP

International Systems & Automation
ISA CO., LTD.
HEIAN BLDG.2-6-16 OKUBO, SHINJUKU-KU, TOKYO 160 JAPAN
PHONE:03-232-0570 TELEX:2324496 ISATOK CABLE:ISAHEIAN

Listing 1 continued:

```
168   117     O
169   125     U
170   104     D
                .
                .       Back again
                .
171   016     SO      Select G1 (PDI Graphics)
                .
                .       Set color to CYAN again for the rain
                .
172   074     SET     Set Color
173   155             X1G0BG0B
                .
                .       Draw Rain using various textured lines
                .
174   045     SPR     Point Set Relative
175   107             )
176   104             ) - (dx,dy) = (+.01953125,-.1171875) => (+5,-30)
177   152             )
                .
178   043     TEX     Texture
179   102             )
                .
180   051     LIR     Line Relative
181   177             )
182   165             ) - (dx,dy) = (-.0390625,-.078125) => (-10,-20)
183   164             )
                .
184   045     SPR     Point Set Relative
185   100             )
186   122             ) - (dx,dy) = (+.078125,+.0703125) => (+20,+18)
187   142             )
                .
188   043     TEX     Texture
189   101             )
                .
190   051     LIR     Line Relative
191   177             )
192   165             ) - (dx,dy) = (-.0390625,-.078125) => (-10,-20)
193   164             )
                .
194   043     TEX     Texture
195   100             )
                .
196   045     SPR     Point Set Relative
197   100             )
198   122             ) - (dx,dy) = (+.078125,+.08984375) => (+20,+23)
199   147             )
                .
200   051     LIR     Line Relative
201   177             )
202   165             ) - (dx,dy) = (-.0390625,-.078125) => (-10,-20)
203   164             )
                .
204   045     SPR     Point Set Relative
205   100             )
206   122             ) - (dx,dy) = (+.078125,+.0625) => (+20,+16)
207   140             )
                .
                .       Label the "RAIN" vertically
                .
208   042     TXT     Text
209   114             Char Path Down
                .
210   017     SI      Select G0 (ASCII Text)
                .
                .       "RAIN"
                .
211   122     R
212   101     A
213   111     I
214   116     N
                .
                .       Back to Graphics
                .
```


www.americanradiohistory.com

Listing 1 continued:

```
215   016     SO      Select G1 (PDI Graphics)
        .
        .     Reset to normal text
        .
216   042     TXT     Text
217   100             Char Path Right
        .
        .     Set color to BLACK
        .     (actually transparent)
        .
218   074     SET     Set Color
219   100     TRN     X1000000
        .
        .     Draw the road
        .
220   044     SPA     Point Set Absolute
221   100             }
222   100             } - (x,y) = (0.0,0.0) => (0,0)
223   100             }
        .
224   065     POF     Polygon Filled
225   120             }
226   106             } - (dx,dy) = (+.5,+.1953125) => (+128,+50)
227   102             }
        .
228   100             }
229   121             } - (dx,dy) = (+.078125,+.0546875) => (+20,+14)
230   146             }
        .
231   100             }
232   120             } - (dx,dy) = (+.078125,+.0) => (+20,+0)
233   140             }
        .
234   177             }
235   155             } - (dx,dy) = (-.0703125,-.0703125) => (-18,-18)
236   166             }
        .
237   167             }
238   142             } - (dx,dy) = (-.3515625,-.1796875) => (-90,-46)
239   162             }
        .
        .     Label the "ROAD"
        .
240   044     SPA     Point Set Absolute
241   120             }
242   102             } - (x,y) = (.5,.078125) => (128,20)
243   104             }
        .
244   017     SI      Select G0 (ASCII Text)
        .
        .     "ROAD"
        .
245   122     R
246   117     O
247   101     A
248   104     D
        .
249   016     SO      Select G1 (PDI Graphics)
        .
        .     Change Size of text
        .
250   042     TXT     Text
251   100             }
252   100             }
253   100             }
254   112             } - (dx,dy) = (+.046875,+.078125) => (+12,+20)
255   144             }
        .
        .     Draw BLACK "Figure 1"
        .     as base for drop shadow
        .
256   044     SPA     Point Set Absolute
257   112             }
258   105             } - (x,y) = (.25,.6859375) => (64,175)
259   107             }
```

Listing 1 continued on page 164

Circle 305 on inquiry card. ⟶

Read the fine print.

Improve the output of your present system with a dot-matrix printer from NEC.

For good-looking copy in a hurry, it's hard to beat NEC's hard-working PC-8023A. This is a bi-directional 100 CPS, 80-column printer that can operate in a compressed-print mode to yield 132 columns. Special 2K buffer holds a page of data, so the unit can print while you're typing in something else. Compatible with a wide range of computers, from Apple® to Zenith®*.

Compare these features with your present printer:

Tractor and friction feed

Complete ASCII characters plus Greek, math, and graphic characters

Elite, pica, compressed print, proportional spacing, subscript and superscript

Standard parallel Centronics interface, serial optional

Prints clear original and up to three copies simultaneously

*Special cables may be necessary. Contact your local NEC Home Electronics dealer

Productivity at your fingertips

NEC

NEC Home Electronics (U.S.A.), Inc.
Personal Computer Division
1401 Estes Avenue
Elk Grove Village, IL 60007
(312) 228-5900

Nippon Electric Co., Ltd., Tokyo, Japan

www.americanradiohistory.com

Listing 1 continued:

```
        .
260     017     SI      Select G0 (ASCII Text)
        .
        .       "Figure 1"
        .
261     106     F
262     151     i
263     147     g
264     165     u
265     162     r
266     145     e
267     040     space
268     061     1
        .
        .       Finish drop shadowing with yellow over black
        .
269     016     SO      Select G1 (PDI Graphics)
        .
270     074     SET     Set Color
271     166     YEL     X1GROGRO
        .
272     044     SPA     Point Set Absolute
273     102             )
274     176             ) - (x,y) = (.24609375,.6875) => (63,176)
275     170             )
        .
276     017     SI      Select G0 (ASCII Text)
        .
        .       "Figure 1"
        .
277     106     F
278     151     i
279     147     g
280     165     u
281     162     r
282     145     e
283     040     space
284     061     1
        .
        .       The end
        .
        .             Text is still large and
        .             YELLOW is the current color
        .
```

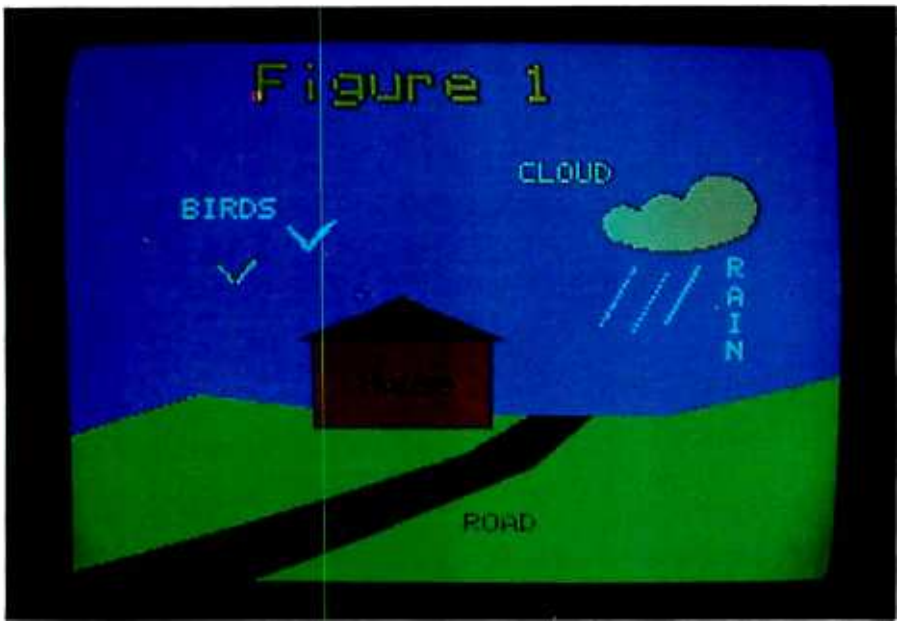

Figure 1: *A simple picture produced by the NAPLPS codes in listing 1. (Photo courtesy of the Unir Corporation.)*

Text continued from page 152:

"control-oriented" NAPLPS functions.

The *single-value* format is used when a common integer is needed. This format is used when specifying color indexes and blink rates (in tenths of a second). The single-value format is encoded using 1 to 4 bytes, each containing 6 bits of data. In the default mode, 1 byte is used, thus allowing numbers in the range 0 to 63 to be encoded. In the maximum mode (4 bytes or 24 bits), numbers from 0 to 16,777,215 can be specified.

The most common format in NAPLPS is the *multivalue* operand. The multivalue-operand format has two coordinate forms and a color form, as shown in figure 4.

The coordinate forms are used to encode (x,y) or (x,y,z) coordinate locations in the unit screen. In the two-dimensional mode, each 6-bit operand contains 3 bits of x and 3 bits of y. Multivalue operands are normally encoded in 3 bytes. Therefore, 9 bits of resolution are encoded for each coordinate. The 9 bits allow for a sign bit and 8 data bits, which results in coordinates suitable for a 256 by 256 resolution display.

NAPLPS supports multivalue operands up to 8 bytes. The 8 bytes each contain 6 data bits. Therefore, 48 bits are available to be split between the coordinates. In two-dimensional mode the 24 bits available for each coordinate can support displays with a resolution of 8 million by 8 million points! This exceeds the resolution of most media, including a page in this magazine.

The multivalue-operand format is also used for color specification. Various amounts of green, red, and blue are specified using this multibyte format. Each 6-bit data item contains 2 bits of each color. The colors are interlaced as shown in figure 4, with green being first and thus least likely to be truncated. This takes advantage of the fact that the human eye is more responsive to green than it is to red and blue.

The 8-byte multivalue-operand format will again yield 48 bits of color information that results in 280,000,000,000,000 colors. With the maximum display resolution and the

www.americanradiohistory.com

The ultimate under $1000 printing machine.

The one machine solution to every application.

For word processing, plotting and just plain printing.

Save the expense of a costly daisy wheel. Eliminate the limited capability of cheap matrix printers. And get plotting in the process!! Get the all new, advanced MT 160 multifunctional micro printer. You'll be amazed that such a small printer can house so much horsepower.

Capability? You name it, this printer's got it. A resident Report Package puts you in the Word Processing world...letter quality characters, proportional spacing, margin justification, auto centering. A resident Graphics Package lets you plot whatever your micro wants to portray. The standard print mode lets you generate reports fast—speeds up to 200 lines per minute. Also, print eight different resident character widths.

There's more. Clip-on paper handling attachments let you use fan-fold forms, letterhead, cut sheets or continuous roll paper. The control panel has a "menu select" for machine configuration. When you look under the hood, you'll see what is meant by "solid construction." And the MT 160 is plug compatible to your micro.

In short, the MT 160 is the epitome of engineering excellence. And it should be. Afterall, Mannesmann Tally is the technology leader in matrix printing.

MANNESMANN TALLY

8301 South 180th St.
Kent, Washington 98032
Phone (206) 251-5524

IN DISTRIBUTION NOW!

WEST
Anacomp
(206) 881-1113
Byte Industries
(415) 783-8272
Kierulff Electronics
(213) 725-0325
Paragon Sales
(408) 263-7955
PGI Distribution
(602) 967-1421
Waybern
(714) 554-4520
Western Micro Technology
(408) 725-1660

Acorn Data Products
(303) 779-6644

CENTRAL
Hall-Mark Electronics
(214) 343-5000
Information Systems
(312) 228-5480
D. L. MacNeil, Inc.
(312) 952-8300
Sysprint
(214) 669-3666
Tek-Aids
(312) 870-7400

EAST
Computermaxx
(904) 878-4121
Digital Solutions
(404) 955-4488
Micro Distributors
(301) 468-6450
Hansen & Hughes
(201) 652-7055
Tech Data
(813) 577-2794
US Plus
(203) 234-0444
Mannesmann Tally Canada
(416) 661-9783

Circle 256 on Inquiry card.

www.americanradiohistory.com

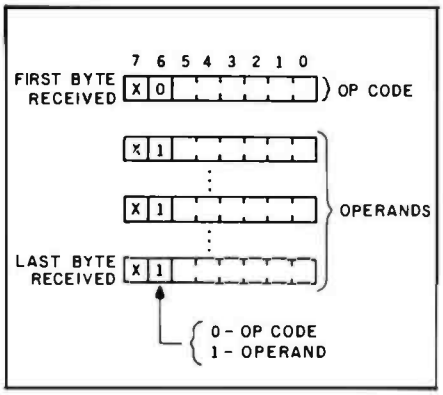

Figure 2: *The general structure for op codes and operands of the Picture-Description Instructions (PDIs) in NAPLPS.*

maximum color resolution, NAPLPS can support displays with 2^{96} bits of display memory! At today's memory prices, such a display would cost $750 billion billion billion dollars. (No wonder semiconductor companies are interested in NAPLPS.)

The final operand format is the *string* operand. This format is used when a long string of bits is needed that may require hundreds or thousands of bytes to encode. This format is used when sending high-resolution pictures and for encoding compressed chain-coded images. These techniques will be discussed in part 3 of this series.

The operand/op code encoding structure of NAPLPS allows a variety of formats and subformats. Many of the op codes contain one or more of the operand types. For example, the Text op code, which will be described in detail later on, is followed by two fixed-format operands and a multivalue operand. The total number of operand bytes for this op code is variable, but the first 2 bytes will always be interpreted as fixed-format bytes and the remaining bytes will be considered as part of a multivalue format. Because of the variable-length nature of the operand encoding in NAPLPS, operands can be truncated and/or omitted with a consistent result dependent on the op code active at the time.

Picture-Description Instructions

The Picture-Description Instructions (PDIs) are used to encode graphics images in NAPLPS. Codes from the PDI G-set and the ASCII-like text set can be intermixed on the same frame. Most of the common PDIs have been used to encode the image in figure 1. These PDIs are described here with references to the coding in listing 1.

b_3	b_2	b_1	b_0		b_6	0	0	1	1	1	1
					b_5	1	1	0	0	1	1
					b_4	0	1	0	1	0	1
						2	3	4	5	6	7
0	0	0	0	0		RESET	RECT (OUT-LINED)				
0	0	0	1	1		DOMAIN	RECT (FILLED)				
0	0	1	0	2		TEXT	SET & RECT (OUT-LINED)				
0	0	1	1	3		TEXTURE	SET & RECT (FILLED)				
0	1	0	0	4		POINT SET (ABS)	POLY (OUT-LINED)				
0	1	0	1	5		POINT SET (REL)	POLY (FILLED)				
0	1	1	0	6		POINT (ABS)	SET POLY (OUT-LINED)				
0	1	1	1	7		POINT (REL)	SET & POLY (FILLED)				
1	0	0	0	8		LINE (ABS)	FIELD				
1	0	0	1	9		LINE (REL)	INCR POINT				
1	0	1	0	10		SET & LINE (ABS)	INCR LINE				
1	0	1	1	11		SET & LINE (REL)	INCR POLY (FILLED)				
1	1	0	0	12		ARC (OUT-LINED)	SET COLOR				
1	1	0	1	13		ARC (FILLED)	WAIT				
1	1	1	0	14		SET & ARC (OUT-LINED)	SELECT COLOR				
1	1	1	1	15		SET & ARC (FILLED)	BLINK				

NUMERIC DATA

Figure 3: *The complete set of Picture-Description Instruction op codes in NAPLPS.*

Reset

The Reset PDI is illustrated in figure 5. It is used to clear the screen

text continued on page 170

www.americanradiohistory.com

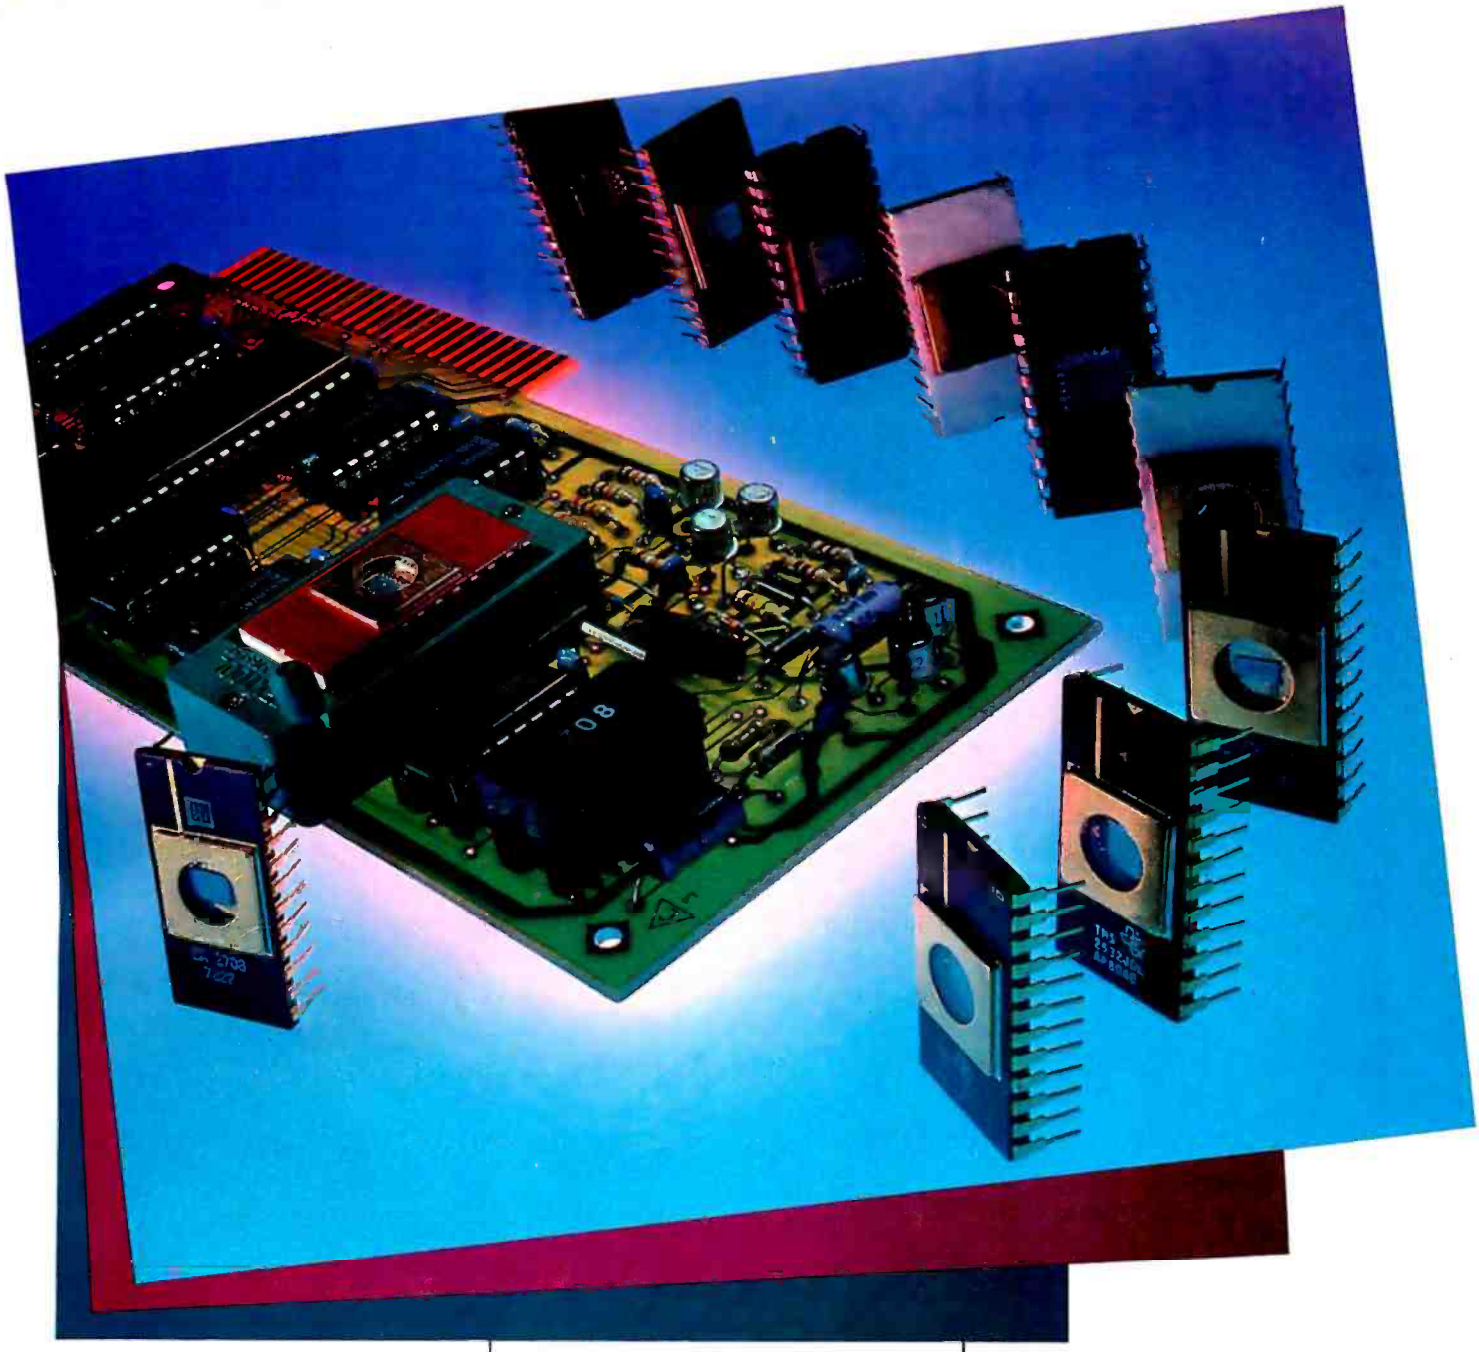

The Apparat EPROM Blaster, Now for the IBM/PC, Apple II and TRS-80.

Apparat's EPROM Burner: It's new. It's more powerful and now available for all three of today's most popular personal computers. And the price has dropped by over 20%.

Increased Capabilities

The Apparat EPROM Burner (A.P.B.) programs most 24 pin 4, 8, 16 and 32k EPROMS, but now it can also program 64k devices. And with all personality modules and software included, Apparat's EPROM programmer is the most sophisticated system on the market.

The A.P.B. system can verify, read, program and copy the EPROM; copy between different ROM types; read or save EPROM data on storage devices; program directly from computer memory and more.

And a Lower Price

Even with increased capabilities we've been able to lower the price 20% to $119.00 ($129.00 for the IBM/PC). This price includes all the personality modules, operating software and the instruction manual.

If you're looking for a powerful, versatile and cost efficient EPROM burner, contact us today, Apparat, Inc., 4401 S. Tamarac Parkway, Denver, CO 80237, (303) 741-1778. Or to order call

800/525-7674

IBM/PC is a trademark of IBM
TRS-80 is a trademark of Tandy Corp.
Apple II is a trademark of Apple Computer

Apparat, Inc.

Circle 25 on Inquiry card.

www.americanradiohistory.com

It's the same old Apple II.

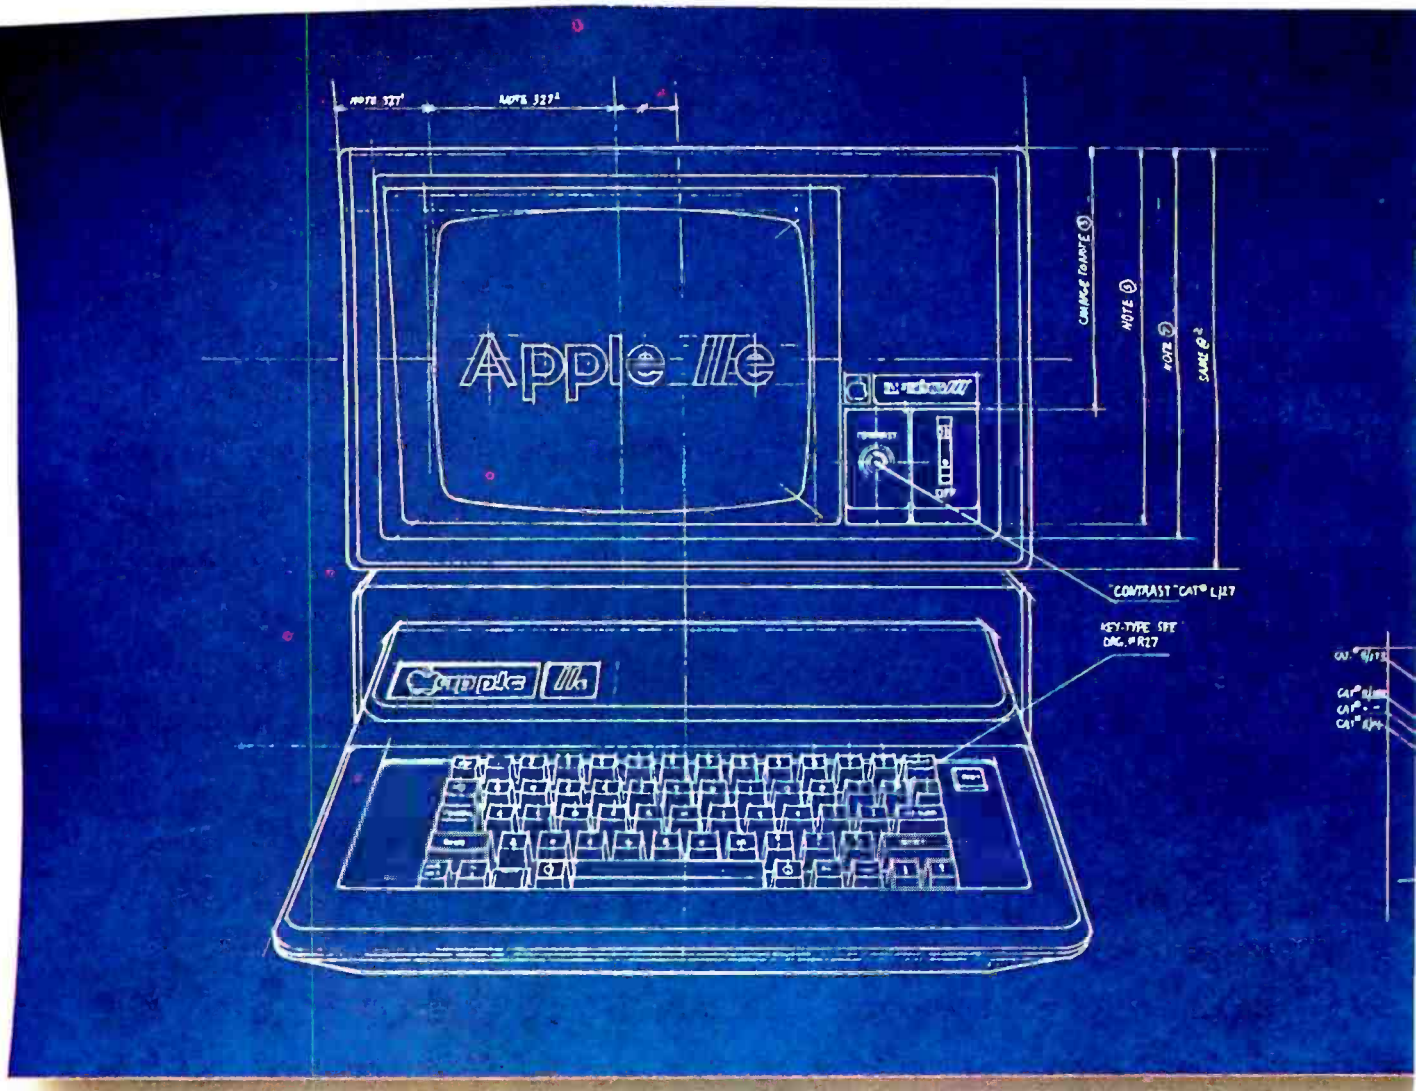

For years, people have been trying to build a better Apple® II.

It finally happened.

Meet the Apple IIe, an impressive new version of a most impressive machine.

The "e" means enhanced. Which means a bundle of new features:

A standard memory of 64K (versus 48K) that's easily expandable. So you can create fatter files and crunch larger numbers of numbers.

A new, improved keyboard, with a complete set of ASCII standard characters. Plus full cursor controls, programmable function keys, and a rapid auto-repeat feature built into every key on the board.

Both upper and lower case characters. (And if you want to see more of them on the screen at one time, a low cost 80-column text card is available.)

Improved peripheral ports. Which make it a lot easier to connect and disconnect game controllers, printers and all those other wonderful things that go with an Apple Personal Computer.

www.americanradiohistory.com

Except for the front, back and inside.

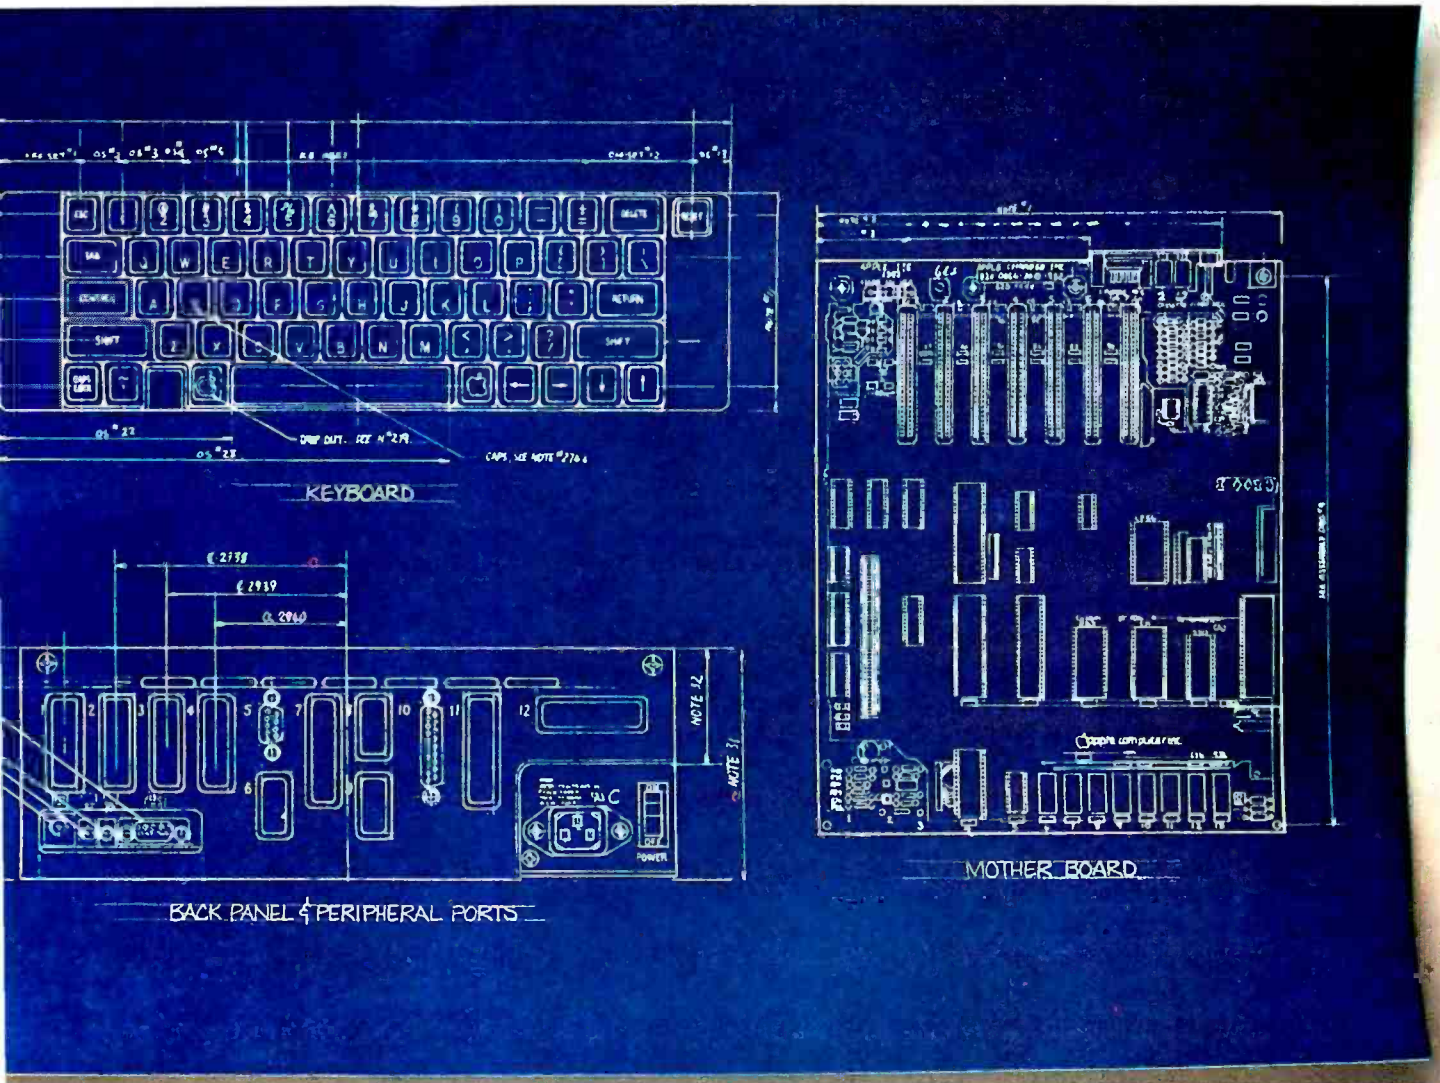

Self-diagnostics. That's a special feature that makes it easy to give your computer a thorough check-up.

Plus an even more reliable design. Achieved by reducing the number of components—which is to say, the number of things that could go wrong.

And bear in mind, the IIe still has all those other virtues that made the Apple II so very popular. Including access to more accessories, peripheral devices and software than any other personal computer you can buy.

So visit any of our over 1300 authorized dealers, and see the newest Apple for yourself.

Like the original, it's rather extraordinary. But then some things never change.

apple

The most personal computer.

Circle 26 on Inquiry card.

Call (800) 538-9696 for the location of the authorized Apple dealer nearest you, or for information regarding corporate purchases through our National Account Program. In California (800) 662-9238. Or write Apple Computer Inc., Advertising and Promotion Dept., 20525 Mariani Ave., Cupertino, CA 95014. ©1983 Apple Computer Inc.

www.americanradiohistory.com

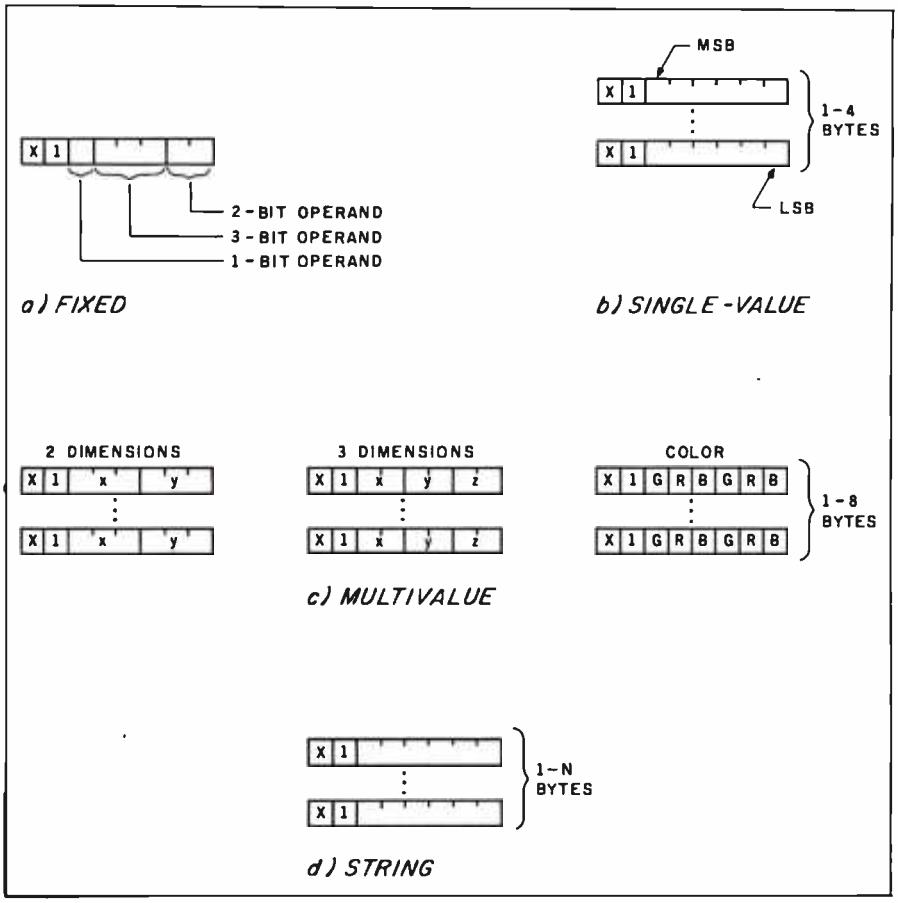

Figure 4: *The various formats for the operands of the PDIs in NAPLPS.*

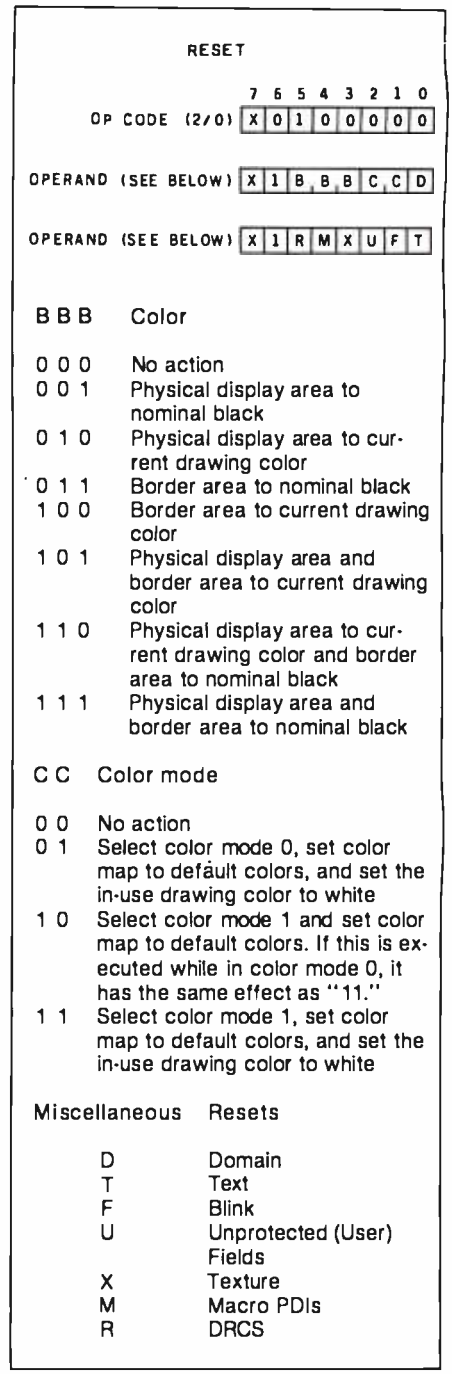

Figure 5: *The operand structure for the Reset instruction.*

and initialize various attributes. Two fixed-format operand bytes contain nine suboperands. The second operand byte can be omitted when those operations are not needed. If both operand bytes are omitted, a complete Reset is performed.

The screen is cleared based on the value in bits 4 to 6 of the first operand byte. The eight combinations are shown in figure 5. In the example frame (line 4), the screen is cleared once to establish the blue sky. The fixed-format operand (octal 120 at line 5) indicates that the screen should be cleared to the current in-use color (in this case, blue). Note that the second fixed-format operand byte is omitted. The op code at line 6 indicates that the previous operation and op code have ended.

Domain

The Domain PDI is used primarily to control the size of data operands for subsequent PDIs. As shown in figure 6, the Domain PDI is made up of a fixed-format operand followed by a multibyte operand. The fixed-format operand controls the size of single-value operands and multivalue operands as well as the dimensionality of coordinates.

The multivalue operand is used to control the size of the logical drawing point.

Text

The Text PDI controls attributes related to text and "text-like" symbols. As discussed in part 1, text symbols are unique in the sense that they are rectangular templates that contain a figure. When a text symbol is requested, the proper template is positioned at the current drawing point, the template is scaled as specified by the text size, and the drawing is performed.

Figure 7 illustrates the Text PDI and operands. Two fixed-format operand bytes contain six suboperands. Each of the suboperands has four possible values. As can be seen, these suboperands control attributes such as rotation, spacing, and cursor style.

The multivalue operand following the two fixed-format operands is used to specify the size and orientation of the text template. The size is expressed in terms of relative coordinates, which we will indicate by the notation (dx,dy). This is to distinguish relative coordinates from absolute coordinates (x,y) that refer

www.americanradiohistory.com

Cdex™ Training for VisiCalc® Makes VisiCalc Easy.

In an hour, Cdex Training for VisiCalc can make you a VisiCalc user. Or for the experienced VisiCalc user Cdex Training for VisiCalc acts as an instantaneous electronic reference and review system.

It's a computer-assisted training program that *works*. It's highly interactive. So it creates a dialogue with you and serves as your personal tutor. It's completely self-paced. So you set your own learning time. And it's graphically-oriented. So you see what you're learning. Remember, a picture is worth 1000 words. Cdex Training for VisiCalc runs on the same Apple® II or IBM® Personal Computer as your VisiCalc program.

So see how easy VisiCalc can be. See your nearest computer dealer for a demonstration.

Cdex™ Training for VisiCalc®

We don't make VisiCalc.
We just make it easy.

cdex™

Cdex Corporation
5050 El Camino Real Suite 200
Los Altos, CA 94022

VisiCalc® is a registered trademark of VisiCorp™

Circle 73 on Inquiry card.

www.americanradiohistory.com

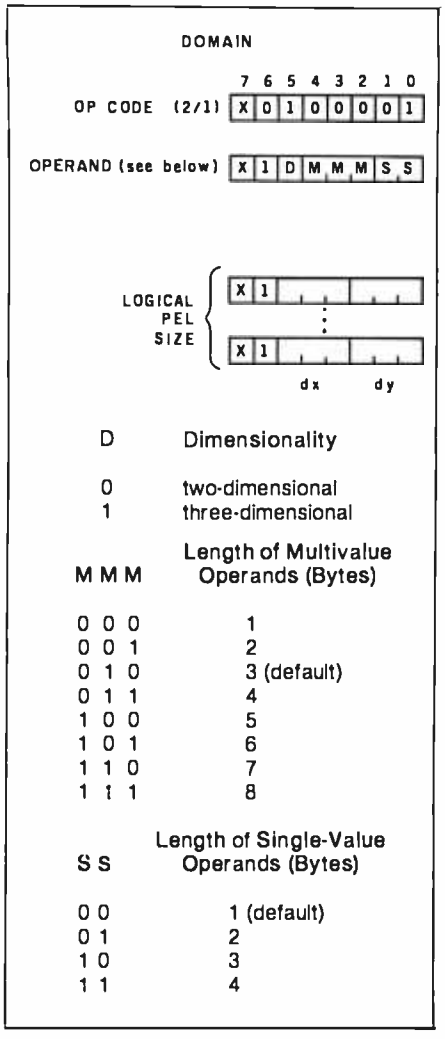

Figure 6: *The operand structure for the Domain instruction. The Logical Pel Size can be thought of as the size of the drawing pen.*

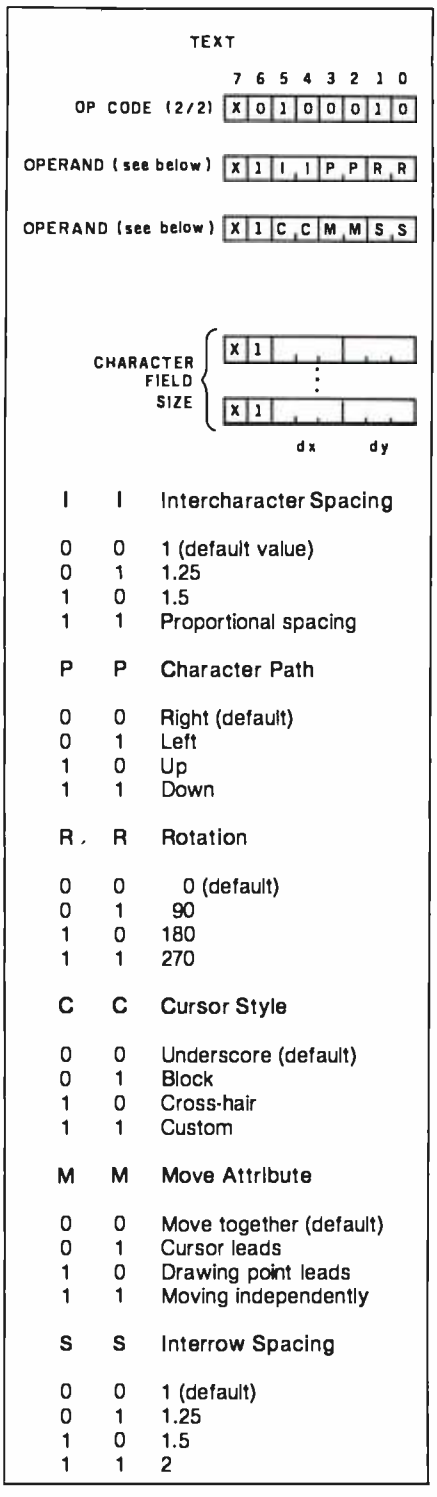

Figure 7: *The operand structure for the Text instruction.*

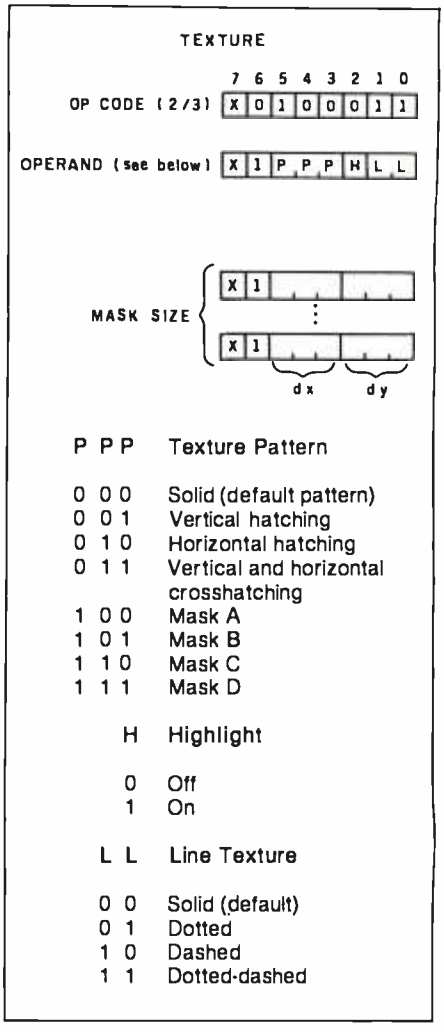

Figure 8: *The operand structure for the Texture instruction.*

to specific points on the unit screen.

In the example frame, text is used to label the objects as well as the entire figure. Most of the text is encoded in the standard manner and therefore no Text PDI is needed. The first Text PDI appears in line 208 and is used to change the Character Path from left-to-right to down. This allows the word "RAIN" (lines 211–214) to be sent without repositioning the drawing point.

Note that the second fixed-format operand and the multivalue size operand are omitted because only the Character Path is being changed. Also note that because the Character Path is being changed, the other two suboperands in that byte (Intercharacter Spacing and Rotation) have to be restated or "refreshed." It is assumed that the NAPLPS code generator will always have knowledge of the current settings of these suboperands so that such a refresh is easy to do.

The Text PDI is used again in lines 250–255. The size of the text is changed to label the figure. The Character Path is also set to left-to-right. The (dx,dy) of (+0.046875, +0.078125) results in a character twice as big in both dimensions as the default characters. If you want to find out how many of these characters could fit on a line, you could divide 1.0 by 0.046875, which results in 21.3 characters per line.

It should be noted that no other Text PDIs appear after the one in line 250. At the end of the frame, the text size is still large. When the next frame is sent, the text size should be changed back to its default state. This is typically done with a global Reset at the beginning of the frame.

Texture

The Texture PDI applies to the texturing of filled areas and lines (see figure 8). Line texturing can be set so that dotted, dashed, or dotted-dashed lines will be drawn instead of the nor-

www.americanradiohistory.com

LET THE "ANGEL"™ DO THE WAITING .....

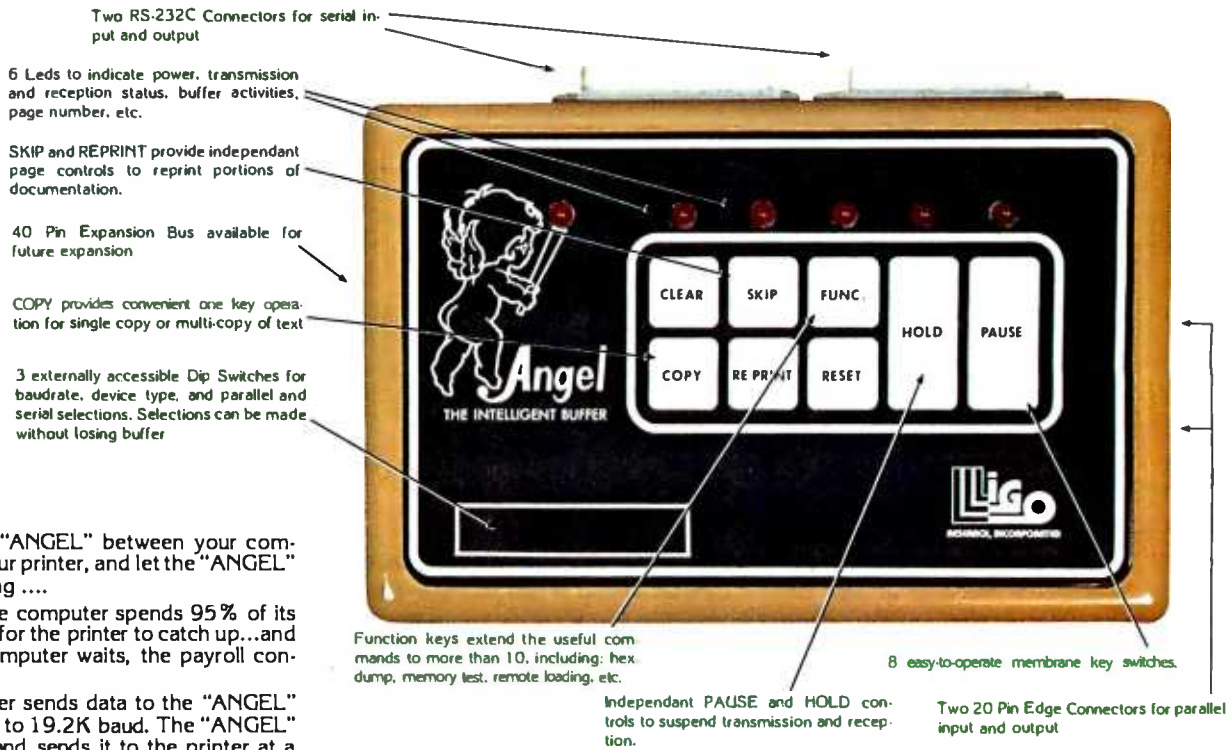

Connect an "ANGEL" between your computer and your printer, and let the "ANGEL" do the waiting ....

Your valuable computer spends 95% of its time waiting for the printer to catch up...and while the computer waits, the payroll continues.

The computer sends data to the "ANGEL" at speeds up to 19.2K baud. The "ANGEL" stores data and sends it to the printer at a speed the printer can handle, and your computer is free to continue working without interruption.

A USER WRITES:

"I tried the "ANGEL" with my Altos system connected to an Epson MX-100, both set at 9600 baud. Without the "ANGEL" it takes 30 minutes to print 210 doctors' requisition forms. With the "ANGEL" installed, my computer is free after 90 seconds."

With "ANGEL'S" self diagnostics and memory test, the entire system thoroughly checks itself every time you power up.

PAGE REPRINT is another unique feature. EXAMPLE: You are printing a 32 page report, and the paper jams at page 11. Reset the printer to the top of the form, press PAGE REPRINT, and resume printing at the top of page 11. Want to restart two pages back? Press PAGE REPRINT twice, and you resume at page 10.

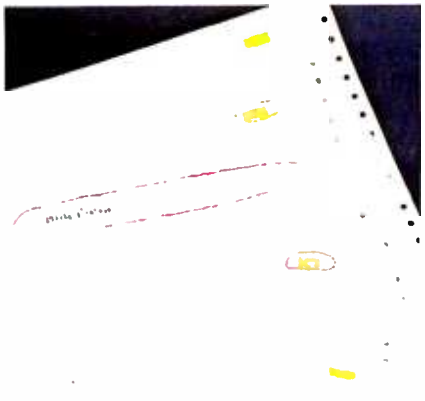

PAGE REPRINT

"ANGEL" is compatible with almost all Micro-Computers, including IBM, Apple, TRS-80, Vector Graphic, NorthStar, Altos, Xerox, Heath, Zenith, NEC, DEC, etc., with RS-232 serial, Hardware Handshaking, or Centronics compatible parallel interface. The manufacturer reserves the right to change the product specification.

...And think of these other possibilities: HEX DUMP. Display or printout every bit of data your computer sends out to the printer in an easy-to-read Hexidecimal and ASCII format. A must for your programmer. Pause and Hold for real time programs. Page skip for selective printing. What a waste to print the entire documentation if you only need part of it.

Simple external switch settings, let the "ANGEL" accept either RS-232 serial or Centronics parallel data and can output either/or in any combination, (S-S,S-P,P-S,P-P). The "ANGEL" is compatible with almost all Micro-Computers, and can be installed by anyone in minutes. Switches are clearly marked for ease of operation, and a concise, USER FRIENDLY operator reference card is included with each unit.

The "ANGEL" has a full one year limited warranty.

THE "ANGEL" WILL NEVER KEEP YOU WAITING!

HEX DUMP

The chart shown here illustrates the features of the "ANGEL" compared to other buffer devices. When compared with the "ANGEL", the others just don't measure up. Sorry guys.

Feature	ANGEL	MICRO-FAZER **	SPOOLER4	MICRO BUFFER IN LINE	SOOPER SPOOLER SERIAL **
Price	295.00	330.00	319.00 w/o serial	349.00	603.00
Memory Size	64K	64K	64K	64K	62K
Max Baud Rate	19.2K	?	N/A	19.2K	?
Serial-Parallel	Yes	*	No	*	*
Parallel-Serial	Yes	*	No	*	*
Parallel-Parallel	Yes	*	Yes	*	*
Serial-Serial	Yes	Yes	No	Yes	Yes
Copy	Yes	Yes	No	Yes	No
Reset/Clear	Yes	Yes	No	Yes	Yes
Pause/Hold	Yes	No	No	Yes	No
Page Skip	Yes	No	No	No	No
Page Reprint	Yes	No	No	No	No
Continuous Copy	Yes	?	No	?	No
Self-Diagnostics	Yes	?	?	?	?
Hex Dump	Yes	No	No	No	No

* Can only be configurated for one of the four Modes.

** Information based on available specifications from manufacturer's advertisement as of December, 1982

Micro-Fazer TM of Quadram Corp.

Sooper Spooler TM of Compulink Corp.

TO ORDER:

CALL TOLL FREE 1-800-323-3304 OR SEND CHECK OR MONEY ORDER TO LIGO RESEARCH

Please rush me ( ) "ANGEL(S)" @ $295.00 each

	Sub total	
ILLINOIS ONLY	Add 6% U.S. sales tax	
	Delivery charge	$4.00
	TOTAL	

Charge my ( ) VISA ( ) MASTERCARD

MY ACCT. # IS_____

EXPIRATION DATE_____

Ligo Research, Inc. • 396 E. 159th St. • Harvey, IL 60426 • 1-312-331-8797 • In Canada 1-416-859-0370

Circle 246 on Inquiry card.

www.americanradiohistory.com

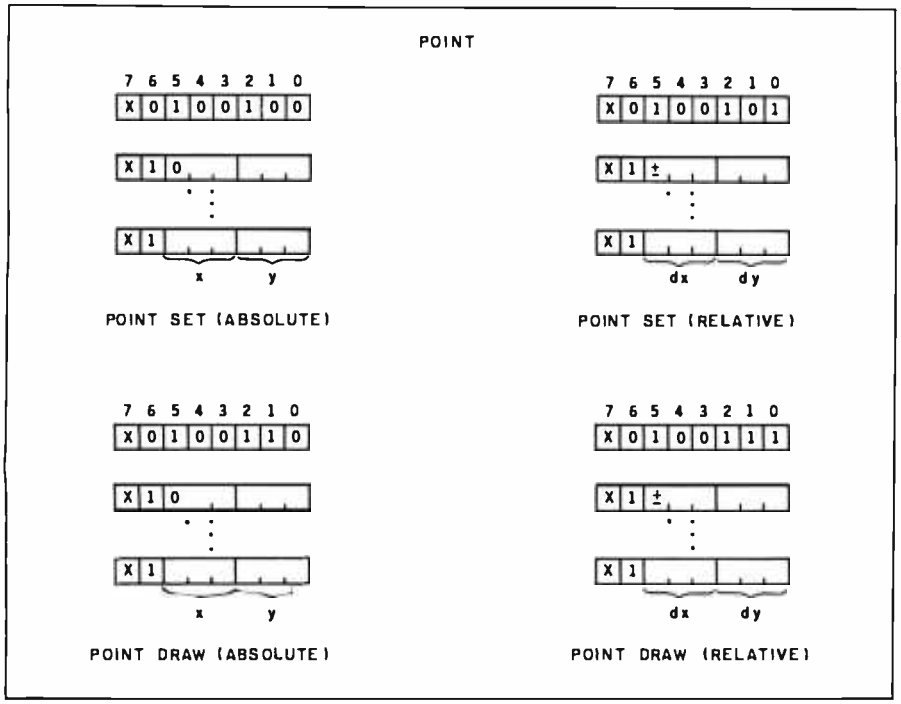

Figure 9: *The Point instructions in NAPLPS. Point Set merely moves the "drawing point" to the desired position. Point Draw actually draws a point at that position. Coordinates can be either absolute (x,y) or relative (dx,dy). The first bit of each coordinate is a sign bit. The remaining bits are encoded as fixed-point binary numbers, with the "binary point" assumed to be just to the right of the sign bit.*

mal solid line. A variety of area textures can be selected so that large objects can have recognizable interiors. The area textures can be chosen from a "stock" set of patterns or "programmable" patterns can be used.

A "cartoon-like" highlighting feature is included. When enabled, filled areas are highlighted (usually in black) to accent the edges. This is especially useful in low-resolution video-display systems that have trouble making rapid color changes.

The Texture PDI is used several times in the example frame (lines 8, 34, 98, 178, 188, and 194). The highlighting is turned off for the grass and on for the house. The highlighting is also used on the left bird to add a little diversity. The line textures are demonstrated in creating the rain (lines 171–203).

Outlined Drawings

The majority of drawings are created using the basic primitives *Point*, *Line*, *Arc*, *Rectangle*, and *Polygon*. All these primitives are supported in NAPLPS with each one having several forms.

Points

Points can be drawn on the unit screen in a variety of ways. As shown in figure 9, four Point PDIs are provided. Two of these commands are used to actually draw points (Point Draw), while the other two merely position the drawing point prior to drawing text or graphics (Point Set). The coordinates for both Point Draw and Point Set can be expressed in either absolute or relative terms.

At this point (no pun intended), it is probably useful to distinguish between the drawing point and the cursor. The drawing point is the imaginary pen point or brush tip that is used to draw graphics on the screen. The cursor is the typical block or underscore that marks the position where the next text entry will be made. The drawing point and cursor usually "track" each other, but this is not required. In other words, the cur-

Johnny's Function Keys Can't Read

Or write. Or move a paragraph. Johnny is not a programmer, so his function keys are nonfunctional.

KeyChanger™

For Johnny, and everyone else who wants the convenience of function keys, help is here. **Keychanger**™ replaces cumbersome multi-stroke control characters with individual function keys, thus saving keystrokes and time. No more "control P-S" – simply press the assigned function key. You may choose from four ready-made sets of functions, or create custom function keys with the aid of on-screen guidance. You can change instantly from one set of functions to another.

Keychanger™ is CP/M compatible and presently supports Wordstar® , dBase II™, and BASIC (other selected programs are coming soon). To start your function keys working, send **$29.95** to **Computer Publishing Co.**, 1945 N. Fine #101, Fresno, CA 93727. For VISA/Mastercard orders, call 209-453-0777. Wordstar is a registered trademark of MicroPro; dBase II is a trademark of Ashton-Tate.

Supplied in many popular diskette formats. Compatible with virtually all terminals having function keys. California residents add sales tax.

Circle 11 on inquiry card.

www.americanradiohistory.com

TDK Floppy Disks. Invaluable security for irreplaceable information.

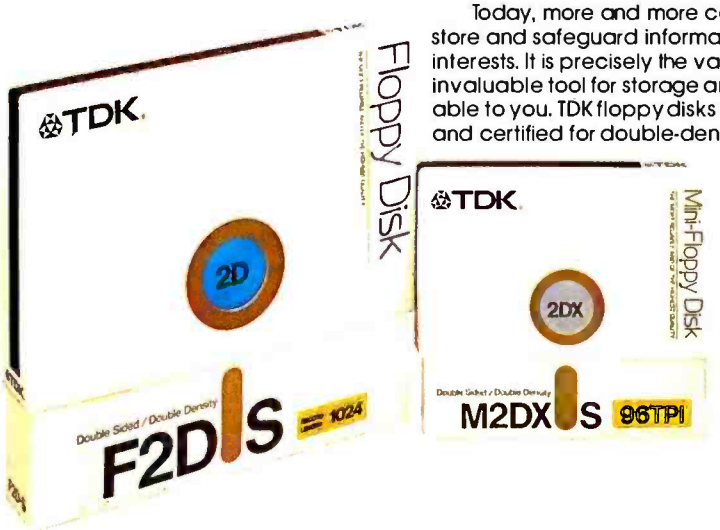

Today, more and more companies are relying on convenient floppy disks to record, store and safeguard information. Irreplaceable information which is vital to their business interests. It is precisely the value placed on this information that makes the floppy disk an invaluable tool for storage and security. And this is where TDK floppy disks become invaluable to you. TDK floppy disks are guaranteed 100% error-free at the time of manufacture and certified for double-density encoding. Furthermore, each track of every TDK floppy disk is tested to exceed industry standards... including those of IBM, Shugart, ANSI, ECMA, ISO and JIS. Once you insert a quality TDK floppy disk into your computer system, you're guaranteed highly reliable, ultra smooth performance. This is due to TDK's proprietary disk-burnishing technique that provides optimum head-to-disk contact.

TDK floppy disks are available in 5¼ and 8-inch sizes in the most popular formats. Each disk comes in its own protective Tyvek-type envelope. For a copy of our brochure, "Some Straight Talk About Floppy Disks," write to: TDK Electronics Corp., Computer Products Marketing Dept., 12 Harbor Park Drive, Port Washington, NY 11050, or call 516-625-0100.

TDK®
The heart of your system.

©1982 TDK Electronics Corp.

Circle 417 on Inquiry card.

www.americanradiohistory.com

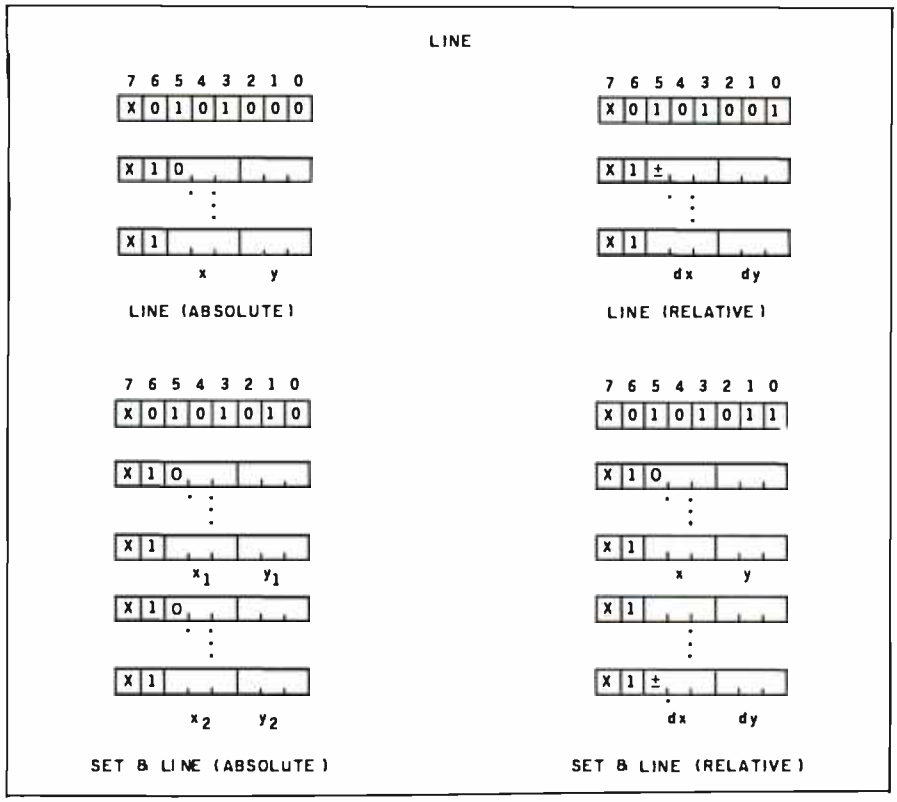

Figure 10: *The Line instructions. The Set & Line instructions move the drawing point to a new position and draw a line from that position. The Line instructions draw a line from the present drawing point.*

sor can be positioned on the screen and the drawing point can be moved independently.

The example frame uses the "Set" forms of the Point PDIs, but not the "Draw" forms. Line 36 is an example of a Set Point Absolute op code. This op code is used to position the drawing point to a specific place on the screen regardless of where the drawing point is currently located. This is in preparation for drawing the house.

Line 44 is an example of a Set Point Relative op code. This op code is followed by a (*dx*,*dy*) operand that specifies a distance to move from the current position. This move is made in preparation for drawing the roof. Note that the relative form of the op code is useful because the roof should always be "tied" to the house. If a specific (absolute) screen coordinate had been specified, the roof would be fixed at a certain location. In this example, if the initial coordinate (lines 37–39) is changed, the roof will move with the house.

IF YOUR COMPUTER'S IMPORTANT TO YOU

Protect It!

Without SAFEWARE,™ you could be uninsured. For as little as $35 a year, SAFEWARE provides complete protection for all hardware, media and purchased software. Both business and home application. Call toll free today for more information or immediate protection. Columbia National General Agency, 88 E. Broad, Columbus, Ohio 43215. *(In Ohio call 1-800-848-2112)*

1-800-848-0598

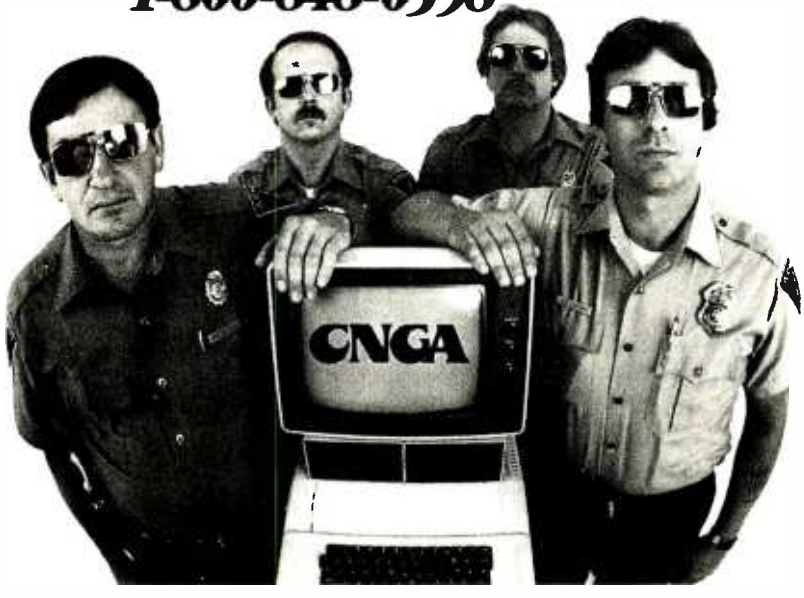

Lines

Lines are used in almost every graphics display. Four forms of the Line PDI are provided, as shown in figure 10. The major difference in the four op codes is that two of them draw a line from the present drawing point and the other two draw from a new set point. Also, two of the op codes involve relative positions and two involve absolute positions.

Lines are used to create the rain in the example frame. The relative form of the Line PDIs is used in lines 180, 190, and 200. As mentioned, the lines are drawn using the current texture setting.

Arcs

The Arc PDIs are extremely powerful, but may be confusing to the casual observer. Most people can eventually be convinced that only one circular arc can be drawn through three points if two of the points are known to form the endpoints. In NAPLPS the three points on the arc are specified rather than the center and radius. The three points are specified just like other points in the unit screen.

Circle 83 on inquiry card.

text continued on page 180

www.americanradiohistory.com

Mr. Dow and Mr. Jones
introduce
Dow Jones Software™

Jones: "Mr. Dow, look what they're selling in that new store down the street: Dow Jones Software. You haven't gotten us into ladies' fashions, have you?"

Dow: "No, Mr. Jones. That's a computer store, and our software products allow investors and business professionals to use a personal computer like this one here to easily manage financial information."

Jones: "Just what can our software do?"

Dow: "In a nutshell, Jones, with a personal computer, a telephone, a modem and Dow Jones Software, you can easily perform complex analyses on the information available from our information service, Dow Jones News/Retrieval®."

Jones: "You mean all those calculations I've been doing by hand I could do in a fraction of the time with this software? That's great!"

Dow: "It is, Mr. Jones. Just like The Wall Street Journal, Dow Jones Software is a resource you can bank on!"

Available nationwide from these fine computer dealers...

ALASKA

ANCHORAGE

Abacus North
511 West 4th Ave.
(907) 276-7443

Rainbow Technics
4301 North Star
(907) 278-3923

The Software Store
4600 Business Park Blvd.
(907) 694-3044

ARIZONA

PHOENIX

Computerland of Phoenix
3152 E. Camelback Road
(602) 956-5727

CALIFORNIA

ANAHEIM

Powers Computer Center
1295 N. Euclid St.
(714) 778-6021

ARCADIA

Love Computers
7 East Foothill
(213) 447-0721

BAKERSFIELD

Computer Basics
5600 California Ave.
(805) 834-5611

BREA

Computer City
2700 E. Imperial Highway
(714) 996-0800

Computique
1080 E. Imperial Highway
(714) 990-6600

EL TORO

Wabash Apple Computer
Suite C & D
23720 El Toro Road
(714) 768-3236

ENCINO

The Software Source
17905 Ventura Boulevard
(213) 705-4445

CAMARILLO

Crawford Data Systems
350 N. Lantana Ave., #561
(805) 484-4159

COSTA MESA

Computer City
3941 S. Bristol
(714) 549-7749

Platt Music/May Company
3333 S. Bristol
(714) 546-9321

FAIRFIELD

Mark Anthony Computer
1972 I N. Texas
(707) 426-4600

HUNTINGTON BEACH

Gateway Computer Center
15201 Springdale
(714) 895-3931

The Software Store
16562 Gothard St.
(714) 842-0460

Sun Computers
17671 Beach Blvd.
(714) 846-5574

IRVINE

Learning Shack
17981-J Sky Park Circle
(714) 966-6631

V.I.P.
14775 Jeffrey Road, J
(714) 752-6341

LA MESA

Computerland
7200 Parkway Drive
(619) 464-5656

LAWNDALE

Computer Stop
16811 Hawthorne Blvd.
(213) 371-4010

Computique
1611 Hawthorne Blvd.
(213) 370-5795

LONG BEACH

A-Vidd Electronics
2210 Bellflower Blvd.
(213) 598-0444

continued on next page

DOW JONES SOFTWARE™

...Bank on it.

www.americanradiohistory.com

DOW JONES SOFTWARE DOW JONES SOFTWARE DOW JONES SOFTWARE

LOS ALAMITOS
Amis Desktop Computers
10512 Los Vaqueros Circle
(714) 952-4122

LOS ANGELES
Compusystems (Downtown)
1050 West 6th Street
(213) 975-1220

Computerland
10600 W. Pico Blvd.
(213) 559-3353

Computique
11986 Wilshire Blvd.
(213) 820-0423

Computique
3285 Wilshire Blvd.
(213) 385-7777

Computique
435 West 7th Street
(213) 629-0121

LOS GATOS
Idea Computer
301 N. Santa Cruz Ave.
(408) 354-1210

MODESTO
Computerware
1031 15th Street
(209) 578-9739

OAKLAND
Software Centre Int'l.
5269 Broadway
(415) 428-9333

ORANGE
Computer City
1904 Tustin Ave.
(714) 974-3082

PALO ALTO
Mission Computers
550 University Ave.
(415) 326-9689

Software Centre Int'l.
477 University Avenue
(415) 327-0520

PASADENA
Computique
260 S. Lake Ave.
(213) 795-3007

The Software Centre
548 S. Lake Avenue
(213) 793-4443

RIVERSIDE
Computer Kingdom
5225 Canyon Crest Dr., #30
(714) 787-1142

ROCKLIN
Audio Video Computer Center
3111 Sunset Blvd.
(916) 988-6024

SACRAMENTO
Capitol Computer System
1771 Tribute Road
(916) 483-7298

SANTA ANA
Computique
3211 South Harbor Blvd.
(714) 549-7373

Software Centre Int'l.
3821 S. Bristol
(714) 641-0332

SANTA BARBARA
Computer Plaza
3313A State Street
(805) 687-9391

SANTA MONICA
The Computer Store
820 Broadway
(213) 451-0713

SAN DIEGO
Computer City
4603 Mission Bay Drive
(619) 270-3100

The Computer Merchant
5107 ElCajohn Blvd.
(619) 583-3963

Software Centre Int'l
4170 Convoy St.
(619)576-1424

Software Only
8199 Clairemont Mesa Blvd.
(619) 569-1666

Wabash Apple
4636 Convoy Street
(619) 576-1604

SAN FRANCISCO
Apex Information Systems, Inc.
#1A Russian Hill Place
(415) 885-1633

Computer Connection
214 California Street
(415) 781-0200

Quest Computer Store
710 Montgomery Street
(415) 982-3753

Software Center
4720 Geary Blvd.
(415) 751-2231

SAN JOSE
Businessland, Inc.
3610 Stevens Creek Blvd.
(408) 554-9292

TARZANA
Computique
18665 Ventura Blvd
(213) 705-7507

VENTURA
Computerland
3875 Telegraph, Suite E
(805) 656-7711

WEST LOS ANGELES
The Software Spot
1977 Santa Monica Blvd.
(213) 477-7561

WOODLAND HILLS
Software Etc.
19973 Ventura Blvd.
(213) 702-8918

COLORADO

AURORA
Compushop
3102 S. Parker Road
(303) 337-5885

Micro Computer Center
Suite F, 2680 S. Havana
(303) 751-0811

BOULDER
Computer Connection
Suite 101, 1600 38th Street
(303) 449-8282

DENVER
C W Electronics
800 Lincoln Street
(303) 832-1111

Idex Micro Systems
999 18th Street, Suite 225
(303) 293-2299

ENGLEWOOD
Computers Etc., Inc.
8923 E. Union Ave.
(303) 779-5256

FT. COLLINS
Rocky Mountain Computers
2601 S. Lemay, #24
(303) 223-4000

CONNECTICUT

WETHERSFIELD
Computer Resources, Inc.
683 Silas Deane Highway
(203) 563-9000

WESTPORT
Computerworks
1439 Post Road East
Liberty Plaza
(203) 255-9096

DISTRICT OF COLUMBIA

WASHINGTON, D.C.
The Computer Store
1990 K Street
(202) 466-3367

FLORIDA

FT. LAUDERDALE
The Computer Works
6221 N. Federal Highway
(305) 491-8600

NORTH PALM BEACH
Computer Center of the Palm Beaches
751 Northlake Blvd.
(305) 848-3801

GEORGIA

ATLANTA
Compushop of Georgia
The Prado
5600 Roswell Road
(404) 252-9611

Computer Center, Inc.
3623 Interstate 85 North
(404) 457-8465

HAWAII

HILO
The Computer Store
291 Keawe Street
(808) 969-1166

HONOLULU
Computer Market of Hawaii
578 Ala Moana Blvd.
(808) 521-7312

Memory Lane Computers
841 Bishop St.
(808) 526-3232

IDAHO

LEWISTON
B & I Computer System
1824-B Main Street
(208) 746-5980

Team Electronics
1920 - 19th Avenue
(208) 746-0086

ILLINOIS

AURORA
Farnsworth Computer Center
1891 N. Farnsworth Avenue
(312) 851-3888

BUFFALO GROVE
Compushop
1363 W. Dundee Road
(312) 577-0600

CHICAGO
Chicago Computer Company
222 West Adams, Suite 245
(312) 372-7360

Compushop
180 N. Wacker
(312) 726-7190

Computers Plus
5050 N. Cumberland Ave.
(312) 452-0066

Systems Source
131 W. Madison
(312) 726-7879

DEERFIELD
Video Etc.
465 Lake Cook Road
(312) 498-9669

EVANSTON
Nabih's
515 Davis St.
(312) 869-6140

LAKE FOREST
Lake Shore Computers
1000 N. Western Avenue
(312) 234-1002

MIDLOTHIAN
Compushop
14403 S. Cicero Ave.
(312) 396-1020

NILES
Computerland
9511 N. Milwaukee Avenue
(312) 967-1714

NORTHBROOK
Northbrook Computers
4113 Dundee Road
(312) 480-9190

OAKBROOK TERRACE
Oakbrook Computer
17 West 426 - 22nd Street
(312)941-9005

ORLAND PARK
Micro Age Computer Store
8752 W. 159th St.
(312) 349-8080

Video Etc.
9107 W. 151st Street
(312) 460-8980

PEORIA
Wallace Micro Mart
2619 N. University
(309) 685-7876

VILLA PARK
Farnsworth Computer Center
383 E. North Avenue
(312) 833- 7100

INDIANA

INDIANAPOLIS
Microage Computer Store
8615 Allisonville Road
(317) 849-5161

LOUISIANA

BATON ROUGE
The Computer Place
5500 Florida Blvd.
(504) 926-4630

SHREVEPORT
Micro Business Systems
3823 Gilbert
(318) 226-8848

MAINE

AUBURN
Software Centers
95 Spring Street
(207) 784-4330

MARYLAND

BETHESDA
Bethesda Computers
8020 Norfolk Avenue
(301) 657-1992

CUMBERLAND
Miller & Miller
49 North Centre Street
(301) 777-1000

EASTON
The Computer Shop
10 West Dover Street
(301) 995-1816

LAUREL
The Communications Center
9624 Ft. Meade Road
(301) 953-9535

SALISBURY
The Computer Shop
112 West Market Street
(301) 543-8200

MASSACHUSETTS

BURLINGTON
Computer City
Vinebrook Plaza
(617) 273-3146

CAMBRIDGE
Harvest Computers
118A Magazine Street
(617) 547-3289

Tech Computer Store
199 Alewife Brook Parkway
(617) 497-0395

CHARLESTOWN
Computer City
420 Rutherford Avenue
(617) 242-3350

DANVERS
Computer City
151 Endicott Street
(617) 774-7118

NEEDHAM
New England Electronics (NEECO)
679 Highland Ave.
(617) 449-1760

WATERTOWN
Micro Source Financial
23 Elm Street
(617) 924-5500

WORCHESTER
Computer City
16 Front St
(617) 755-5464

MICHIGAN

ANN ARBOR
Complete Computer Center
413 East Huron
(313) 994-6344

BIRMINGHAM
SIMTEC
4114 W. Maple
(313) 855-3990

FARMINGTON HILLS
Computer Connection
38437 Grand River
(313) 477-4470

GRAND BLANC
Computer Contact
3017 E. Hill Road
(313) 694-3740

GROSS POINTE
Computerland
22000 Greater Mack Ave.
(313) 772-6540

KALAMAZOO
Computer Room
455 W. Michigan Ave.
(616) 343-4634

LIVONIA
Computer Horizons
37099 Six Mile Road
(313) 464-6502

SAGINAW
The Computer Mart
3580 Bay Road
(517) 790-1360

SOUTHFIELD
Spectrum Computers
26618 Southfield Road
(313) 559-5252

TROY
Computer Mart
1824 W. Maple Road
(313) 649-0910

Rainbow Computer
819 East Big Beaver Road
(313) 528-3535

WEST BLOOMFIELD
Retail Computer Center
4381 Orchard Lake Rd.
(313) 855-4220

MINNESOTA

BLOOMINGTON
The Software Centry
Southtown Center
Penn Ave. South I-494
(612)881-4514

BURNSVILLE
Computer Professionals
14322 Burnhaven Drive
(612) 435-8060

MISSISSIPPI

JACKSON
Programs Unlimited
4030 Metro Drive
(601) 969-6705

MISSOURI

KANSAS CITY
Computer ASP, Inc.
7115 N.W. Barry Road
(816) 741-8013

ST. CHARLES
United Computer Center
4033 S. Cloverleaf
(314) 928-1266

ST. LOUIS
Computer Station
11610 Page Service Drive
(314) 432-7019

Forsythe Computers
11445 Olive Street
(314) 567-0450

NEBRASKA

LINCOLN
Micro Technologies
8200 N. 66th St.
(402) 488-4543

OMAHA
Software Source
8610 Cass Street
(402) 397-4958

NEVADA

LAS VEGAS
Century 23
4530 Meadows Lane. #C1
(702) 870-1534

Home Computers
1775 E. Tropicana
(702) 798-1022

RENO
A+ Computers/Byte Shop of Reno
4804 Kietzke Lane
(702) 826-8080

NEW HAMPSHIRE

HANOVER
Chips Micro Center
3 South Street
(603) 643-5413

NASHUA
Computer Mart of New Hampshire
170 Main Street
(603) 883-2386

SALEM
Computertown
304 South Broadway
(603) 893-8812

NEW JERSEY

PRINCETON
Clancy Paul
Princeton Shopping Center
N. Harrison St.
(609) 683-0060

STANHOPE
Computer Universe
23 Route 206
(201) 347-7892

NEW YORK

JERICHO
Programs Unlimited
125 S. Service Road
(516) 997-8668

NEW HYDE PARK
Berliner Computer Center
102 Jericho Turnpike
(516) 775-4700

NEW YORK
Computer Factory, Inc.
485 Lexington Avenue
(212) 687-5000

Datel Systems Corp.
1211 Avenue of the Americas
(212) 921-0110

www.americanradiohistory.com

DOW JONES SOFTWARE DOW JONES SOFTWARE DOW JONES SOFTWARE

Future Data
95 Trinity Place
(212) 732-3905

Macy's Department Store
Herald Square
(212) 560-4491

McGraw Hill Bookstore
1221 Avenue of the Americas
(212) 997-4100

Representative Systems
718 Broadway
(212) 477-3061

SYRACUSE

Omnifax Computer Stores
3216 Eric Blvd. East
(315) 446-1284

YONKERS

Investment Software Concepts
295 Jessamine Avenue
(914) 476-1280

NORTH CAROLINA

GREENSBORO

Byte Shop of Greensboro
218 N. Elm Street
(919) 275-2983

RALEIGH

Computer Solutions
2840 S. Wilmington St.
(919) 755-1779

WINSTON-SALEM

Computer South
8013 Silas Creek
(919) 748-8001

OHIO

BAY VILLAGE

Northcoast Computer
640 Dover Center Rd.
(216) 835-4345

CANTON

Computerland
4106 Belden Village St., N.W.
(216) 493-7786

CINCINNATI

Abacus Computer Store
225 E. Sixth Street
(513) 421-5900

The Future Now
7336 Kenwood Road
(513) 791-4700

CLEVELAND

Computerland
2070 E. 9th St.
(216) 621-7262

COLUMBUS

ADS Systems
642 W. Broad St.
(614) 224-8823

Microage Computer Store
2591 Hamilton Road
(614) 868-1550

Micro Electronics, Inc.
Lane Ave. Shopping Center
1555 W. Lane Avenue
(614) 481-8041

GRANVILLE

Strictly Software
1670 Columbus Road
(614) 587-2938

MAYFIELD HEIGHTS

Computerland
1300 Som Center Road
(216) 461-1200

MENTOR

Cleveland Computer Co.
7673 Mentor Avenue
(216) 946-1722

NORTH OLMSTEAD

Computerland
4579 Great Northern Blvd.
(216) 777-1433

TOLEDO

Abacus II Micro Computers
1417 Bernath Parkway
(419) 865-1009

Abacus II Micro Computers
4751 Monroe Street
(419) 471-0082

The High Tech Systems
4543 Monroe St.
(419)472-1170

YOUNGSTOWN

Computerland
813 Boardman Poland Rd.
(216) 758-7569

OKLAHOMA

OKLAHOMA CITY

Computer Connections
12314 N. May Avenue
(405) 755-9220

TULSA

Computer Connections
8125A East 51st St.
(51st & Memorial)
(918) 663-6342

OREGON

BEAVERTON

Byte Shop
3482 S.W. Cedar Hills Blvd.
(503) 644-2686

EUGENE

Computer Solutions, Inc.
175 Silver Lane
(503) 689-9677

GRANTS PASS

Team Electronics
530 N.E. "E" Street
(503) 479-8723

PENDLETON

F & H Sound
338 South Main
(503) 276-3772

PORTLAND

American Datastar Systems
430 N.E. Glisan
(503) 238-4605

Byte Shop
625 S.W. 10th Avenue
(503) 223-3496

Computerland
327 S.W. Morrison
(503) 295-1928

Stereo Distributors, Inc.
955 N.E. Union Ave.
(503) 232-0915

SALEM

Computerland
980 Lancaster Drive, N.E.
(503) 371-7070

Computer Specialties, Inc.
3390 S. Commercial
(503) 399-0534

Team Electronics
395 Liberty N.E.
(503) 371-7406

TIGARD

Computerland
12020 S.W. Main Street
(503) 620-6170

PENNSYLVANIA

ALTOONA

Mace Electronics
3225 Pleasant Valley Blvd.
(814) 942-5031

DOYLESTOWN

Solution Computer Center
33 North Main Street
(215) 345-4411

ERIE

Mace Electronics
2631 W. Eighth Street
(814) 838-3511

GREENSBURG

Chariot Computers
245 S. Main St.
(412) 838-9560

PITTSBURGH

Business Equipment Sales
5284 Steubenville Pike
(412) 923-2533

Computer Workshop
3848 William Penn Highway
(412) 823-6722

Pittsburgh Computer Store
612 Smithfield Street
(412) 391-8050

The Computer House
1000 Greentree Road
(412) 921-1333

TEXAS

ARLINGTON

Computer Port
2142 N. Collins
(817) 469-1502

BELLAIRE

Compushop
5315 Bissonnet
(713) 661-2008

DALLAS

COMPCO
Suite 108
5519 Arapaho Road
(214) 386-6578

Computer Wares
Suite 106
12300 Inwood
(214) 960-0800

SIMTEC
12801 Midway
(214) 484-3311

EL PASO

RTR Software
444 Executive Center Blvd.
(915) 544-4397

FORT WORTH

Compushop
6353 Camp Bowie Blvd.
Ridglea Plaza
(817) 738-4442

Computer Co-op
3465 Bluebonnet Circle
(817) 926-7331

Computer Wares
4670 S. Hulen
(817) 346-0446

HOUSTON

Compushop
815 Milam
(713) 227-1523

Computercraft, Inc.
5050 FM 1960 West
(713) 583-2032

Computercraft, Inc.
10165 Katy Freeway
(713) 827-1744

Computercraft, Inc.
2709 Chimney Road
(713) 840-9762

Computercraft, Inc.
3233 Fondren
(713) 977-0664

Computercraft, Inc.
1958 West Gray
(713) 522-3130

Computercraft, Inc.
2200 Southwest Freeway
Suite 150
(713) 527-8088

Computercraft Software Store
2723 Chimney Rock
(713) 552-0880

Computercraft Software Store
2200 Southwest Freeway
(713) 521-3050

Computer Galleries
2493 S. Braeswood
(713) 661-0055

Computer Galleries
11538 Northwest Freeway
(713) 956-0900

Computronix
1536 Willowbrook Mall
(713) 890-5832

Computer General Store
5085 Westheimer
Galleria II #3590
(713) 627-0455

SIMTEC
1990 E. Post Oak Blvd.
(713) 850-9797

Software Center of Houston
2200 Southwest Freeway
(713) 521-3050

IRVING

Compushop
Las Colinas Towers IV
125 Carpenter Freeway
(214) 556-2166

Computer Wares
2209 Story Road
(214) 258-0080

NORTH RICHLAND HILLS

Compushop
8214 Bedford-Euless Road
(214) 498-8106

PLANO

Compushop
3100 Independence Parkway
(214) 867-4595

Computer Wares
1915 Central Expressway
Suite 130
(214) 422-5584

SAN ANTONIO

Computer Shop
5011 Walzem Road
(512) 657-7034

VICTORIA

Computer Command Corp.
708 E. Goodwin
(512) 573-4305

UTAH

SALT LAKE CITY

Mnemonics
141 East 200South
(801) 521-2168

Personal Business Computers
1879 S. Main Street
(801) 486-4839

VIRGINIA

ALEXANDRIA

Computers Plus
6120 Franconia Road
(703) 922-7850

Universal Computers
1710 Fern Street
(703) 379-0367

RESTON

Universal Computers
2355-G Hunters Woods Plaza
(703) 620-6160

WASHINGTON

BELLEVUE

Bixby's Sight & Sound Center
11919 N.E. 8th
(206) 454-5770

Online Computer Centers
13710 N.E. 20th Street
(206) 644-2080

Swan Computer Store
1034 116th Ave., N.E.
(206) 454-6272

ELLENSBURG

Computer Craft
115 East 8th St.
(509) 925-3755

LACEY

Stolz's Computers
4106 Pacific Avenue, S.E.
(206) 459-9595

SEATTLE

Compu Lab
735 N. Northlake Way
(206) 633-5020

Computer Shop Business Center
11057 8th Ave., N.E.
(206) 367-4747

SPOKANE

Bits-Bytes-Nibbles, Inc.
209 Northtown Shopping Center
(509) 487-1601

Microspace
S. 114 Madison
(509) 624-3344

WISCONSIN

MILWAUKEE

North Shore Computers
5261 N. Port Washington Rd.
(414) 963-9700

WAUSAU

Oryx Software
205 Scott St.
(715) 848-2322

INTERNATIONAL

SWITZERLAND

Dynatech Prodata
Industriestrasse 30
CH-8302 Kloten

Dow Jones Market Analyzer™
A technical analysis product that allows private and professional investors to automatically collect, store and update historical and daily market quotes, and to construct technical analysis charts at the touch of a key.

Dow Jones Market Microscope™
A fundamental analysis product that allows professional money managers to choose and follow indicators for extensive lists of stocks and industry groups, and to sort, rank, screen and set critical points for buying and selling.

Dow Jones Market Manager™
A portfolio management product for private or professional investors who desire immediate access to pricing and financial information, and who need an accounting and control system for their portfolios of securities.

Dow Jones Connector™
A data retrieval product for the business or professional person who wants instant electronic access to news, facts and vital data at the home or office, via personal computer, simple terminal, communicating word processor or teletypewriter.

DOW JONES SOFTWARE™

...Bank on it.

www.americanradiohistory.com

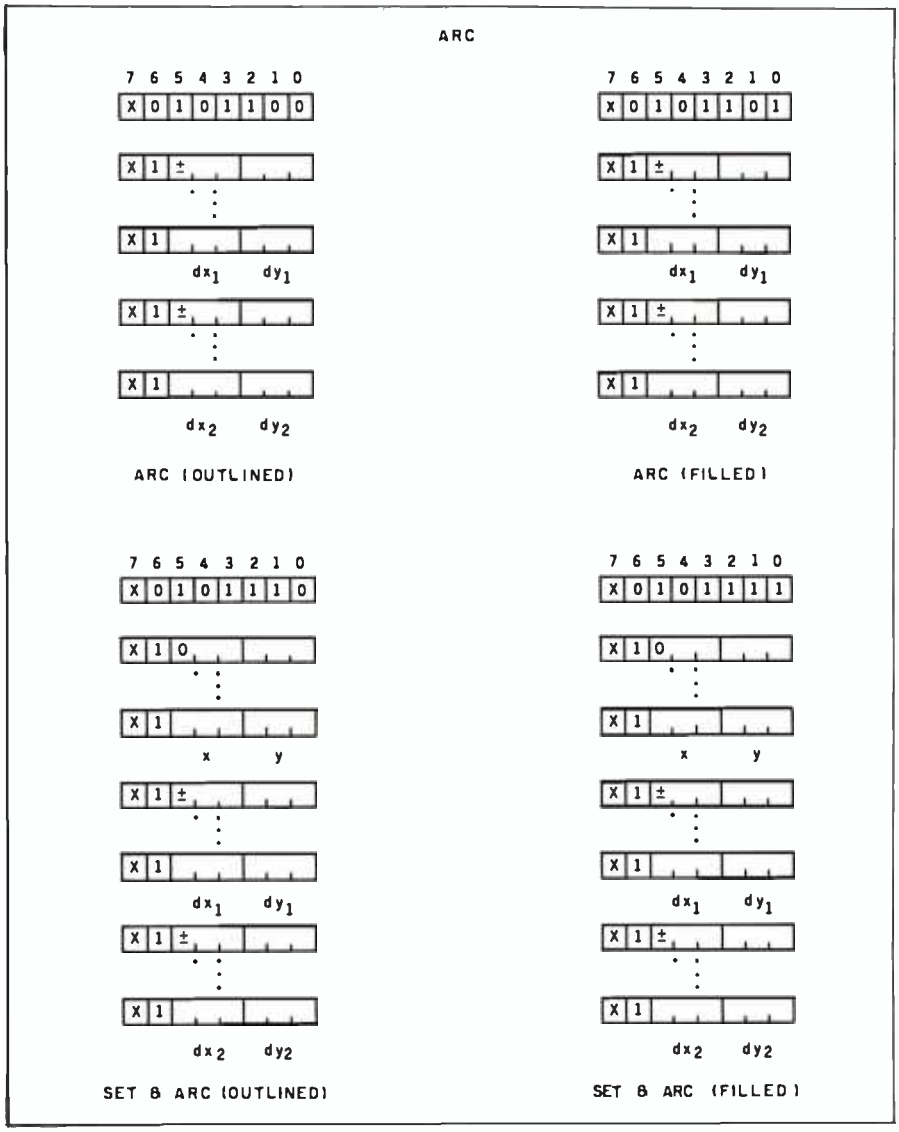

Figure 11: *The Arc instructions.*

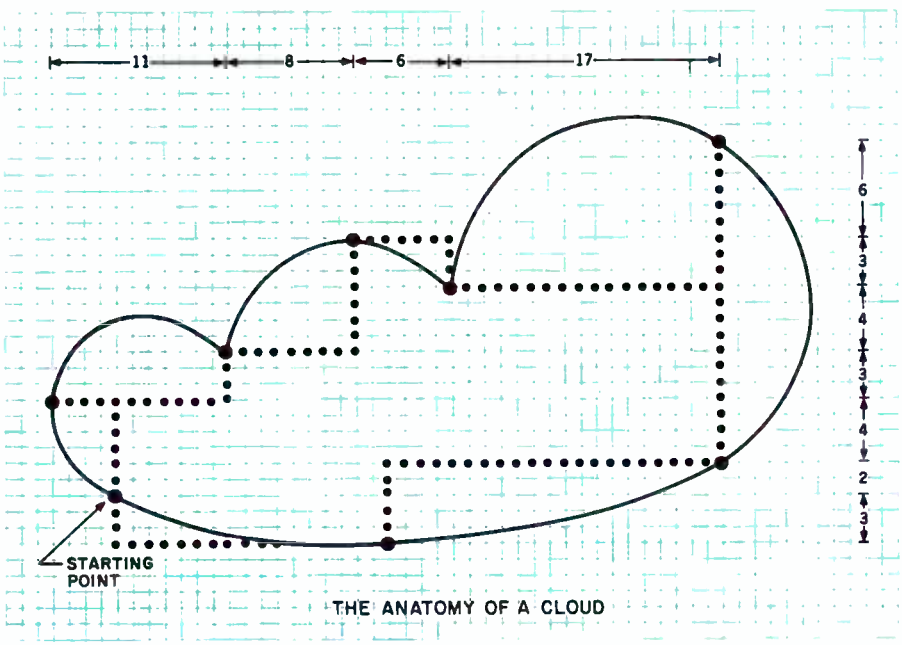

Figure 12: *A diagram showing how the cloud in figure 1 was constructed from four filled arcs and a filled polygon.*

Four forms of the Arc PDIs are included in NAPLPS, as shown in figure 11. Two of the forms allow arcs to be filled so that solid areas with curved edges can be created.

Arcs are used in the example frame to create the birds and the cloud. As shown in figure 12, the cloud is made up of four arcs and a polygon. The area between each arc and a line (or chord) connecting the endpoints of the arc is filled by the Arc (Filled) command. The Polygon (Filled) command fills the middle area.

Circles are a subset of the more general arc. If only two points are specified (instead of three), those points are assumed to form endpoints of a diameter of a circle. Circles can also be encoded using three points in the normal arc format, but the starting and ending points must be equal for a circle to be drawn.

A "hook" has been provided in NAPLPS so that it might eventually support complex curves or *splines*. These curves cannot be described by using simple arcs of circles. But if more than three points are specified for an arc, it should be possible to draw a smooth curve connecting the points. Until algorithms are developed that can efficiently draw a spline, lines can be used to connect the points.

Rectangles

Both filled and outlined rectangles are supported by NAPLPS. The four forms of the Rectangle PDI are shown in figure 13. Rectangles are described by specifying the opposite corner in terms of relative (dx,dy) coordinates. Negative values for dx or dy can be used to produce rectangles in various directions from the current drawing point.

One difference that should be noted with Rectangles is the final destination of the drawing point. Most drawing commands cause the drawing point to be left at the last point involved in the figure. In the case of the Rectangle, only the x coordinate is modified so that the drawing point moves horizontally. This allows for histograms or bar charts to be generated in an efficient manner.

A Rectangle is used to generate the

www.americanradiohistory.com

Plug 3,000 new applications into your Apple®

THE CP/M Card™ plugs CP/M Plus™ into your Apple.
The CP/M Card gives you the option of running your Apple II with the speed and capability of a professional Z-80 system with CP/M®-compatible software. You plug in the CP/M Card. Then choose CP/M or your standard Apple software at your option.

Plug into a big, new world of software.
The CP/M Card gives you instant access to the world's largest selection of microcomputer software—more than 3,000 CP/M-compatible applications, languages, and programming utilities. So, you, too can use professional business programs such as WordStar,® SuperCalc,™ Condor,™ and other high-performance software from Day One. Yet, you still have access to your present library of Apple software.

Plug into incredible performance.
Together, the ultra-fast CP/M Card and CP/M Plus run applications up to 300% faster than your Apple system! The CP/M Card is the only Apple II performance package that offers the speed and efficiency of CP/M Plus.

A plug about quality.
The CP/M Card was designed and built by Digital Research, the creators of CP/M, and Advanced Logic Systems, the most respected manufacturer of Apple performance products. So you know the CP/M Card is the most perfectly integrated Apple performance package you can buy.

Why just keep plugging along? The CP/M Card provides everything you need—including 64K of on-board memory, CP/M Plus, CBASIC,* GSX™-80 and full documentation—for just $399. Now available through the CP/M library. See your local microcomputer dealer today. Or contact Advanced Logic Systems, 1195 East Arques Ave., Sunnyvale, CA 94086 (800) 538-8177. (In California (408) 730-0306.)

als
Advanced Logic Systems

The CP/M Card for your Apple II.

CP/M, CP/M Plus, the CP/M Card and CBASIC are either trademarks or registered trademarks of Digital Research Inc. Z-80 is a registered trademark of Zilog, Inc. WordStar is a registered trademark of MicroPro International Corporation. SuperCalc is a trademark of Sorcim Corporation. Condor is a trademark of Condor Computer Corporation. GSX-80 is a trademark of Graphics Software System. Apple is a registered trademark of Apple Computer, Inc. ©1982 Digital Research Inc.

Circle 149 on Inquiry card.

www.americanradiohistory.com

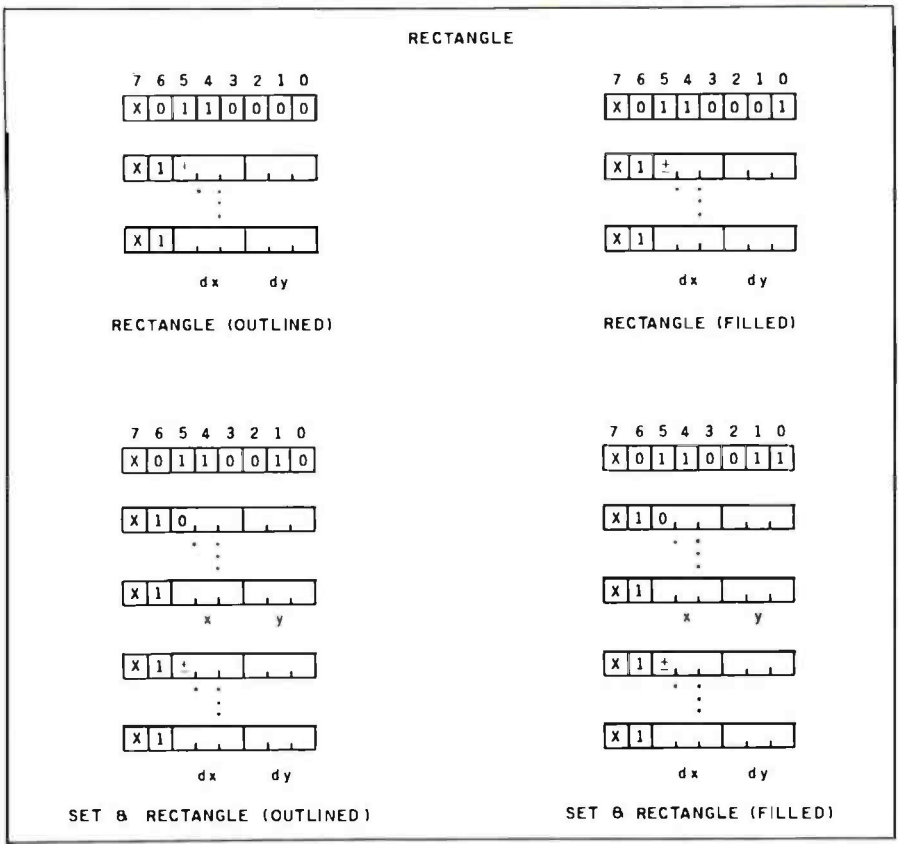

Figure 13: *The Rectangle instructions. Note that only one point is required to define a rectangle.*

house in the example frame. The op code at line 40 could have been a Set Rectangle Filled with the data from lines 37–39 moved into the operation. This would eliminate the need for the Point Set Absolute op code at line 36. Both encodings would yield the same result.

Polygons

The irregular Polygon is a very useful feature in NAPLPS. Many objects can be broken down into multisided irregular objects. These objects can be encoded using the endpoints of the lines forming the sides.

Four forms of the Polygon op code are available, as shown in figure 14. The outlined polygons do not offer much more than an efficient way to send a lot of lines. It should be noted that the last line in a polygon is not explicitly sent. The polygon is automatically "closed" by an edge connecting the last point sent and the starting point.

The filled polygons offer the ability to define an entire object disregarding

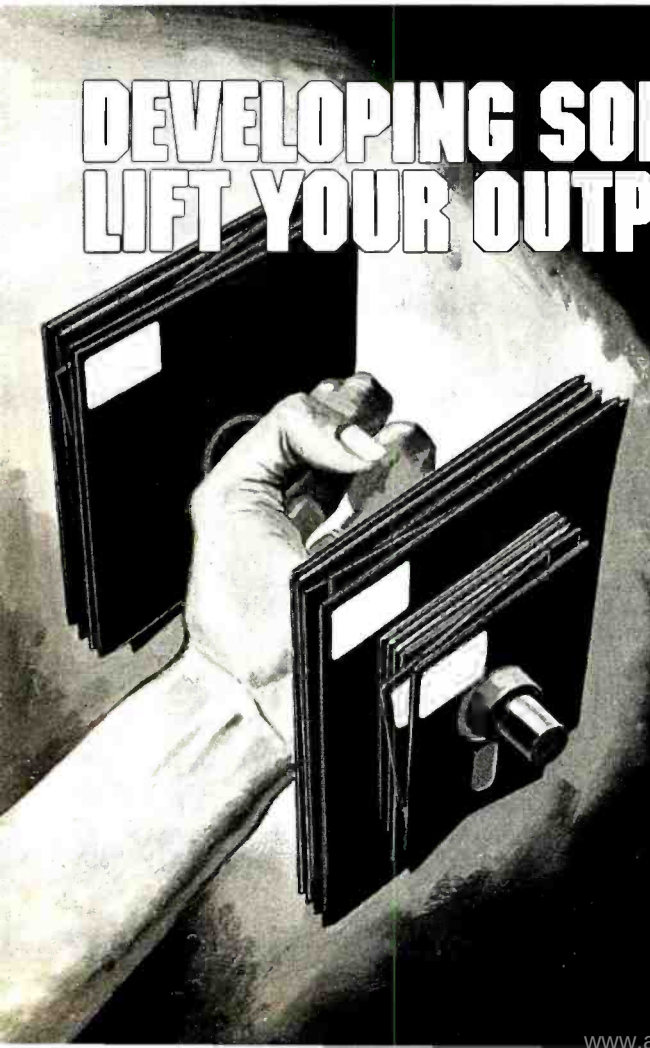

DEVELOPING SOFTWARE UNDER CP/M?
LIFT YOUR OUTPUT WITH MICROSHELL®

When you're into heavyweight software development you need more operating system power than CP/M can offer. MICROSHELL builds up CP/M with UNIX features that really help you put out software. Just for starters: MICROSHELL crunches long CP/M dialogs into one-line commands. Puts muscle and flexibility into SUBMIT commands. Captures CRT output and redirects it to CP/M files without retyping. Pulls programs from another disk drive or user number automatically (makes hard disk handling a snap). And it's ready for more work with no time-consuming warm-start after a program runs. MICROSHELL fits your system—uses just 7K of memory in any CP/M computer from Apple to Zenith. Check out MICROSHELL today and find out what a powerful partner it makes—at only $150.

™CP/M, Digital Research; UNIX, Bell Laboratories; Apple, Apple Computer, Inc.

Order Toll Free: 800-368-3359
VISA, MasterCard accepted.
Overseas add $20.00 for air mail.
Manual only: $25.

NEW GENERATION SYSTEMS, inc.

2153 Golf Course Drive
Reston, VA 22091
(703) 476-9143

Circle 312 on Inquiry card.

www.americanradiohistory.com

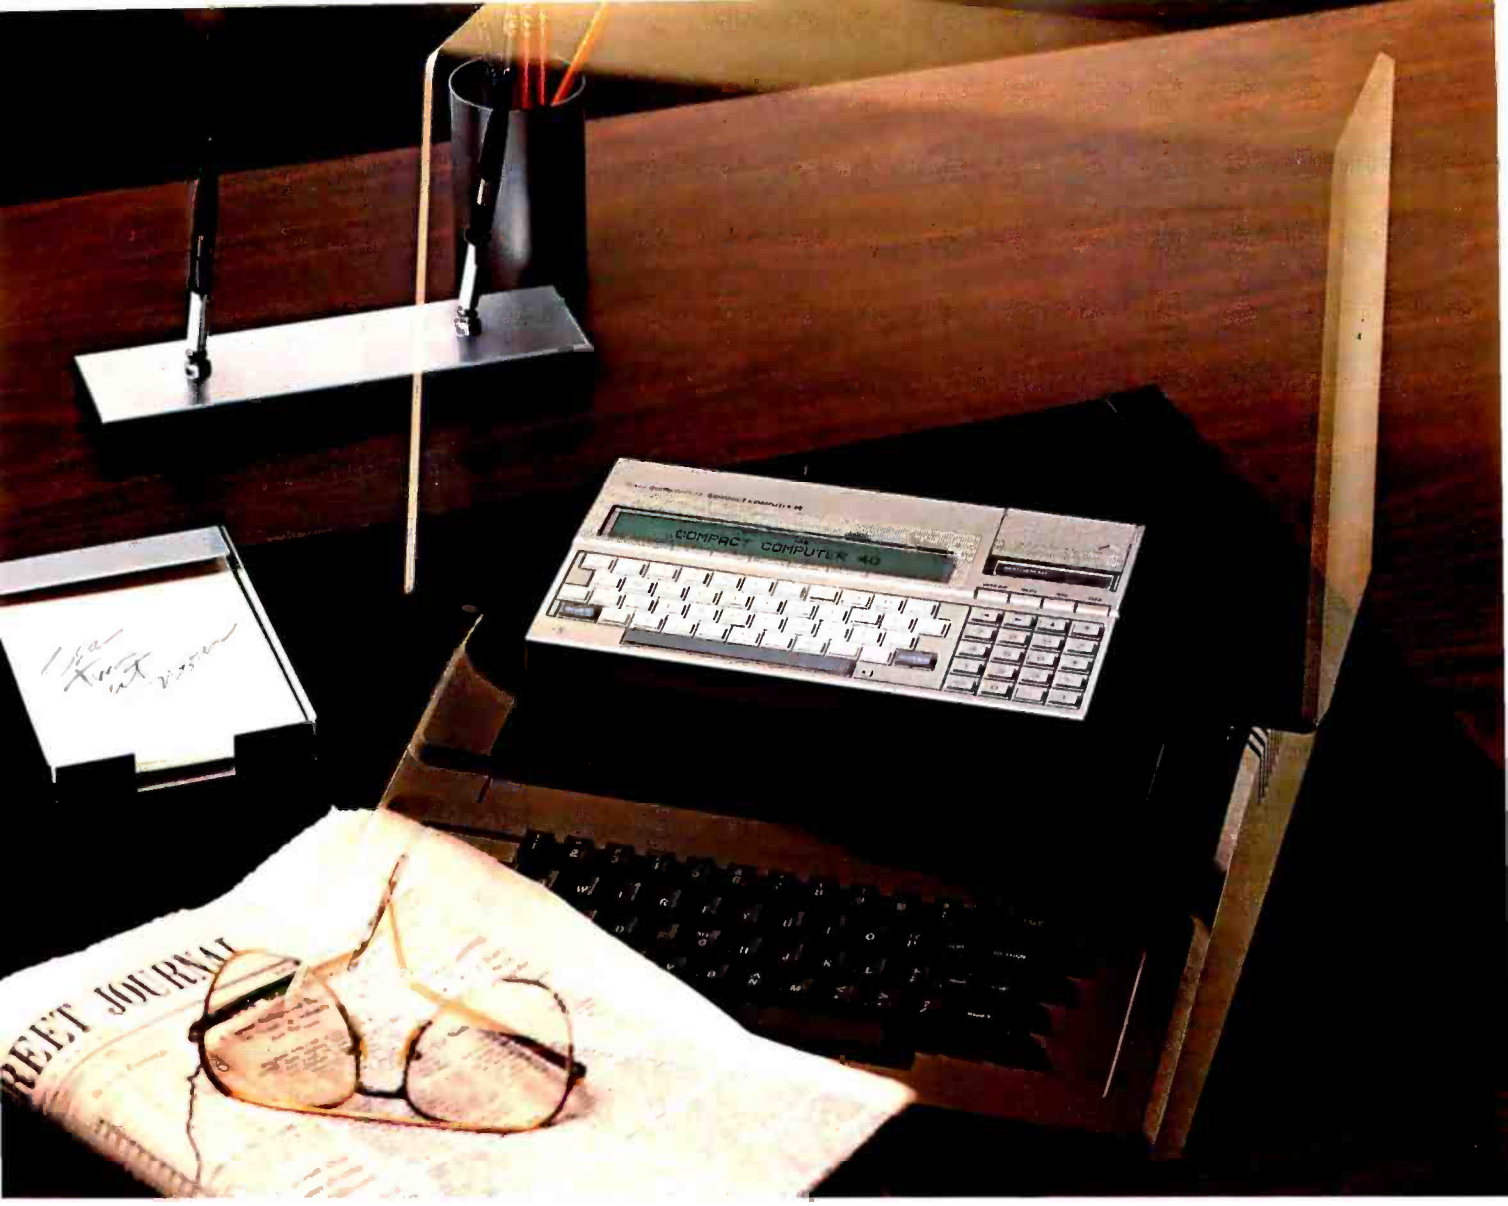

TI's new Compact Computer. It takes over your work, not your desk.

The ordinary personal computer occupies too much of the ordinary desk.

Now Texas Instruments brings you a cordless compact computer that solves the same sort of problems as the Apple™ or IBM™ personal computer. It has enough memory and power for complex problems in business and science, yet the whole thing is smaller than a magazine page.

Sophisticated software is available right now for finance, statistics, production planning, graphics—and spreadsheet and wordprocessing are just around the corner.

For most personal computer tasks, its 6K RAM and 34K ROM are ample. The system is easily, economically expanded.

The TI Compact Computer 40 has peripherals that make it even more useful: a 4-color printer/plotter; an RS-232 interface for talking with other computers or running a larger printer; and TI Wafertape™ drive for program or data storage. TI Solid State Software™ cartridges offer you a choice of convenient, foolproof programs.

Its built-in language is TI Enhanced BASIC, which allows you to write programs in everyday words. The integrated liquid crystal display shows 31 characters, which can be scrolled to show up to 80 per line. It operates on four AA alkaline batteries that give up to 200 hours of service.

The TI Compact Computer 40 offers solutions anywhere you go. Yet it retails for less than 1/3* the price of Apple™ or IBM™ personal computers. The TI Compact Computer—compact in price and size, but not in power. See it soon at your Texas Instruments retailer.

Creating useful products and services for you.

TEXAS INSTRUMENTS

*Based on published manufacturer's suggested retail price.

Apple is a registered trademark of Apple Computer, Inc. IBM is a registered trademark of International Business Machines Corp.

Copyright © 1983 Texas Instruments

Circle 425 on inquiry card.

www.americanradiohistory.com

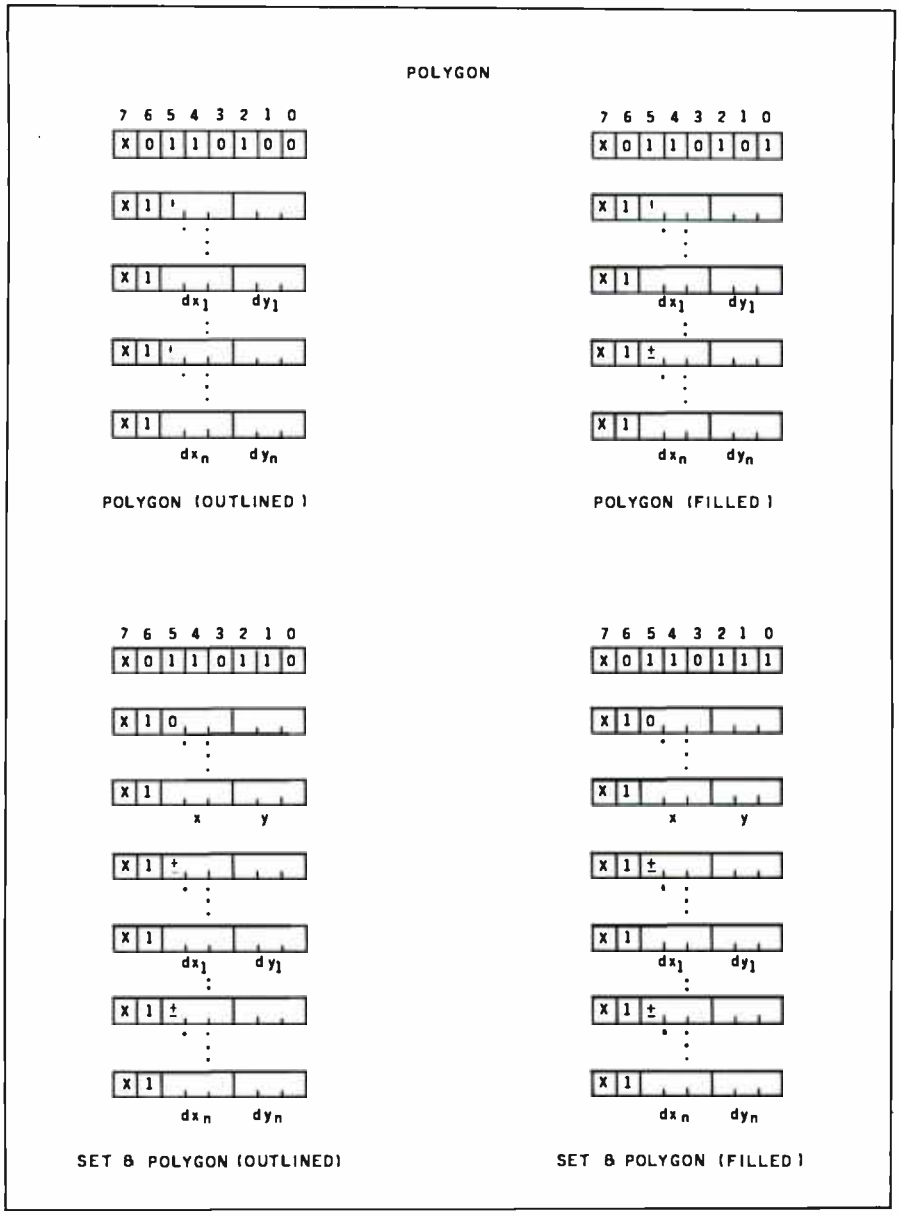

Figure 14: *The Polygon instructions. Any number of points can be used to define the polygon.*

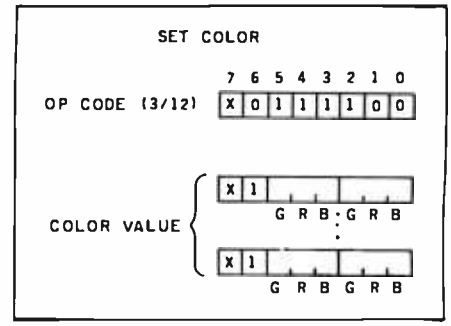

Figure 15: *The Set Color instruction. This instruction defines the color with which all succeeding characters or graphics designs will be drawn.*

what may be "under" the object. Pictures can be built up in the same manner that kids create pictures using construction paper.

In the example frame, the largest polygon is the grass (lines 10–31). When the house is drawn on top of the grass, a piece of the polygon is covered. Likewise, when the road is drawn (lines 220–239), more of the grass is covered. If the grass had been drawn last, part of the house and the entire road would not be seen.

The polygon that is used to fill the center of the cloud (lines 151–160) can be derived directly from the arcs that surround it. As shown in figure 12, the (*dx*,*dy*) values for the polygon end up being the sum of the (*dx*,*dy*) values for the three points that describe the arc.

Other PDIs

Several other PDIs are available in NAPLPS. Some of them allow compressed encoding of high-resolution images and detailed line drawings. PDIs are included that allow "logical" areas on the screen to be specified for user input. Timed waits and blinking capabilities are also part of NAPLPS, but will not be discussed here.

Color Control

Color control in NAPLPS ranges from primitive, static color definitions to exotic color mapping and animation. Here I shall describe only the primitive color-control capabilities of NAPLPS.

The basic color-control capability of NAPLPS allows a color to be expressed as relative amounts of red, green, and blue. The "resolution" of the color specification can vary just as with coordinates (see figure 15). A display device is expected to display the "closest" color that is available.

For simple display devices, 4 to 6 bits of color specification are usually sufficient to select every available color (unless color maps are available). These color-specification bits are usually encoded in a truncated multivalued-operand byte. The first color specification in the sample frame appears in lines 2 and 3. The Set Color PDI is an op code and is followed by a data byte that specifies three units of blue, zero units of red, and zero units of green. The resulting color of the sky is a "very blue" blue.

When a color is specified, it becomes the "current in-use color." Anything drawn after the Set Color will be drawn in the new color. Note that after the sky is created, the green grass color is specified in lines 6 and 7. If this was not there, the grass would be drawn in blue and would not be visible.

Changing Character Sets

If you have been carefully decoding the information in listing 1, you have

www.americanradiohistory.com

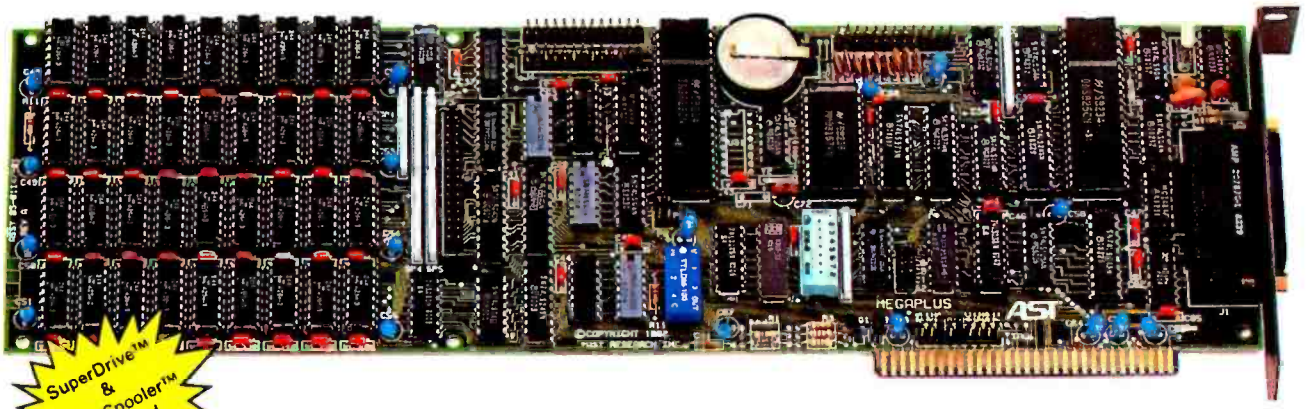

SuperDrive™ & SuperSpooler™ included

Do any QUAD function IBM PC expansion boards measure up to MegaPlus™?

This may really be the only board you need to expand your IBM personal computer. We've now added the most wanted feature on a quad function board: two asynchronous ports along with memory, clock/calendar, and parallel printer port. And unlike most big memory boards, you don't have to sacrifice multiple functions to get 512k of add-on memory in a single slot.

THE BASICS

The main board has three functions standard: Parity checked and fully socketed memory up to 256k in 64k increments, clock/calendar with battery back-up, asynchronous communication port (RS232C serial) which can be used as COM1 or COM2, (DCE for a printer, or DTE for a modem). Optional is a 100% IBM compatible parallel printer port, and a second async port for another $50 each. Also included are: SuperDrive™ disk emulation and SuperSpooler™ printer buffer software.

NO CORNERS CUT

We didn't lower the quality to give you all this. The board is a four layer design with solder masking, silk screened locations, and gold plated edge connectors. Components are premium grade and meet or exceed IBM specifications. Each board is burned in and tested prior to shipment.

CLOCK/CALENDAR & CLIP-ON BATTERY

Our clock is powered by a simple $4 lithium watch battery available at your corner drug store. It is clipped on, not soldered like some other clock boards. How useful is a battery warranty that requires you to send your board to the manufacturer to replace it? We send you a diskette with a program that sets the time and date when you turn on your computer. Now your programs will always have the correct time and date on them without you ever having to think about it. (Just which version of that program you were writing is the latest one?)

MEGAPAK OF MEMORY

The picture in the inset shows the optional 256k MegaPak™ board mounted "piggyback" on the main board. This expandability feature gives those who need it 512k of add-on memory in a single slot. Now you can create disk drives in memory up to 320k, set aside plenty of space for print spooling, and still have plenty of memory for your biggest programs. An exclusive design allows the memory to be split at two memory addresses to take full advantage of the memory disk feature of concurrent CP/M™.

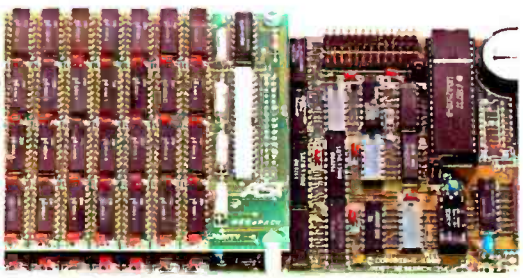

FREE SOFTWARE

The disk emulation software creates "disk drives" in memory which access your programs at the speed of RAM memory. The print spooler allows the memory to accept data as fast as the computer can send it and frees your computer for more productive work. Some manufacturers sell hardware printer buffers that do only this for hundreds of dollars. SuperSpooler™ eliminates the need for these slot robbing products.

CHEAP SOFTWARE TOO

What good is great hardware without some great software to use it with? We offer some terrific prices on some of the popular programs you will want to use your board with. How about the cream of the spreadsheet programs, SUPERCALC, for just $176. Or maybe dBASE II by Ashton-Tate for just $469.

WHY BUY IT FROM US?

Because we provide the service and support most companies just talk about. We realize how integral this board is to the use of your computer. What good is a warranty if it takes weeks for repairs to be made? We offer 48 hour turnaround or a replacement board on all warranty repairs. Do you hear anyone else making this promise? If you still are not convinced, and want to compare prices, remember we don't charge extra for credit cards, shipping, or COD fees. If you still want to buy elsewhere, ask them if they will face the acid test.

THE ACID TEST

Qubie say (Q-B-A) gives you a 30 day satisfaction guarantee on all board purchases. If you are not completely satisfied we will refund the entire amount of your purchase. If you can get any of our competitors to give you the same guarantee, buy any other board you think compares and return the one you don't like. We know which one you will keep. One year parts and labor warranty included.

TO ORDER BY MAIL SEND

- —Your name and shipping address
- —Memory size, and options requested
- —Software and cables needed
- —Daytime phone number
- —California residents add 6% sales tax
- —Company check or credit card number with expiration date (personal checks take 18 days to clear)

VISA master charge

TO ORDER BY PHONE

In California **(805) 482-9829**
Outside California **(800) 821-4479**

PRICES: 64k $359 192k $499
128k $429 256k $569
512k $968

(Includes async, memory, clock, SuperDrive™, SuperSpooler™)

OPTIONS:

Parallel Printer Port	$50
Second Async Port	$50
MegaPak™ with 256k of memory	$399
Cable to parallel printer	$35
Cable to modem or serial printer	$25
Memory Diagnostics Program	$10
SUPERCALC by SORCIM	$176
dBASE II by Ashton-Tate	$469

SHIPMENT

We pay UPS surface charges. UPS 2 day air service $5 extra. Credit card or bank check orders shipped next day.

QUBIE' DISTRIBUTING

4809 Calle Alto
Camarillo, CA 93010

European Inquiries: 129 Magdalene Rd.
London, SW18
870-8899

Circle 462 on inquiry card.

www.americanradiohistory.com

STATISTICS SO EASY, IT'S LIKE MAGIC.

SPEED Stat™

professional statistical analysis system for Apple® computers

At last, there's a sophisticated statistics package that's easy to learn and simple to use: speedSTAT 1.

With extensive statistical analysis capabilities—including a capacity of over 10,000 data points and more than 30 different statistical measures—speedSTAT 1 is the next major tool in your software collection. It multiplies your capabilities...with some pretty magical results.

If you've relied on large computers for your statistical needs in the past, you'll appreciate the convenience and affordability of speedSTAT 1. And even if you don't have much experience with computers or statistics, speedSTAT 1 will make your computer do the work, so you're free to think about the results.

Of course speedSTAT has a lot more up its sleeve. You can learn the details at your Apple dealer. Or call Toll Free 800/543-1350 (in Ohio call collect: 513/891-5044) and we'll send you more information.

SpeedSTAT is a trademark of SoftCorp International, Inc. Apple is a registered trademark of Apple Computer, Inc.

SoftCorp INTERNATIONAL
229 Huber Village Boulevard
Westerville, Ohio 43081

Circle 396 on Inquiry card.

probably come across a few SO and SI codes (octal 016 and 017). These codes are used to indicate a change in the character sets or G-sets that are to be used. In the 7-bit mode of NAPLPS, only one character set can be used at a time. The SO code specifies that the set of PDIs should be used, and the SI code specifies that the Text character set should be used.

You have also probably noticed that the high-order bit of all the codes has not been used. The reason for this of course is that we have been using the 7-bit mode of NAPLPS. If the 8-bit mode were desired, a simple conversion can be made. Each time an SO is found it should be removed, and all bytes following that code should have their high bit set to 1. When an SI is encountered, it should also be removed and the bytes that follow should have a high bit equal to 0. The result would be that all graphics-related codes would be in the form 1XXXXXXX. All text-related codes would have the form 0XXXXXXX.

In the 8-bit mode of NAPLPS, the 14 SI and SO bytes could be removed, which would allow the figure to be stored in only 270 bytes. This may not seem like a big savings, but for large national databases with thousands of frames, every byte counts. There would also be a payoff in transmission time. At 30 characters per second, those 14 bytes might represent almost ½ second, which adds up as a user interacts with a system.

Next Month

In part 3 of this series, I will cover some of the more advanced topics in NAPLPS, including Incremental Lines, Macros, Dynamically Redefinable Character Sets, and Fields.

This series of articles should give the reader a very good overview of this coding system. But as was mentioned last month, anyone seriously interested in working with NAPLPS should obtain a copy of the complete specifications for $18 from X3 Secretariat, CBEMA, 311 First St., NW, Washington, DC 20001, (202) 737-8888. ■

www.americanradiohistory.com

Working with the wrong software is like questioning a fish.

Unproductive.

But now there's DigiSoft. We help you choose the micro-software that's right for you.
You can't go wrong with DigiSoft. We've taken all the surprises out of buying software. No guesswork. No regrets. We give you all the information you need to make the right choice. But we don't stop there. You get plenty of professional support after the sale. And we guarantee your full satisfaction.

Call Toll-Free 800/328-2777
You'll get lots of help from our well-trained software consultants. They'll answer your questions, offer solutions and present several alternatives.

DigiSoft has a comprehensive software inventory, tested and evaluated for top quality and performance. We've labeled our programs I, II and III, so you can select the features best-suited to your needs and budget.

Limited Introductory Offer* 20% Off DMS™ II, and DCalc™ II
DMS is a totally relational database management program that can be part of an integrated financial system. It's compatible with a number of other DigiSoft programs including DCalc II, an electronic spreadsheet. Both can be easily mastered by anyone. If DMS or DCalc II is for you, be sure to take advantage of this special DigiSoft price.

30-Day Money-Back Guarantee
Try our software in your own office, on your own computer for thirty days. If you're not completely satisfied, you're welcome to return it. You have nothing at all to lose.

To order, or request more information, call or send in the coupon today. Visa and Master Card accepted.
*Offer expires 4/15/83.

DigiSoft™
Professional Software Center

☐ Please rush ☐ DMS II @ $259.95 (reg. $324.95)
☐ DCalc II @ $199.95 (reg. $249.95)
☐ Check enclosed.
Charge to ☐ VISA ☐ MASTER CARD

Exp. Date

Signature

Send more information about these DigiSoft programs: ☐ DMS I ☐ DMS II ☐ DMS III
☐ Asset III ☐ GL III ☐ A/P III ☐ A/R III
☐ I/C III ☐ DCalc II ☐ DCalc III ☐ Medical III
☐ Optimizer I, II, III Other: _____

Name

Title Company

Computer Type

Address

City State Zip

Mail to: DigiSoft, 10901 Red Circle Drive, Mpls., MN 55343 Call800/328-2777 C

Circle 144 on Inquiry card.

www.americanradiohistory.com

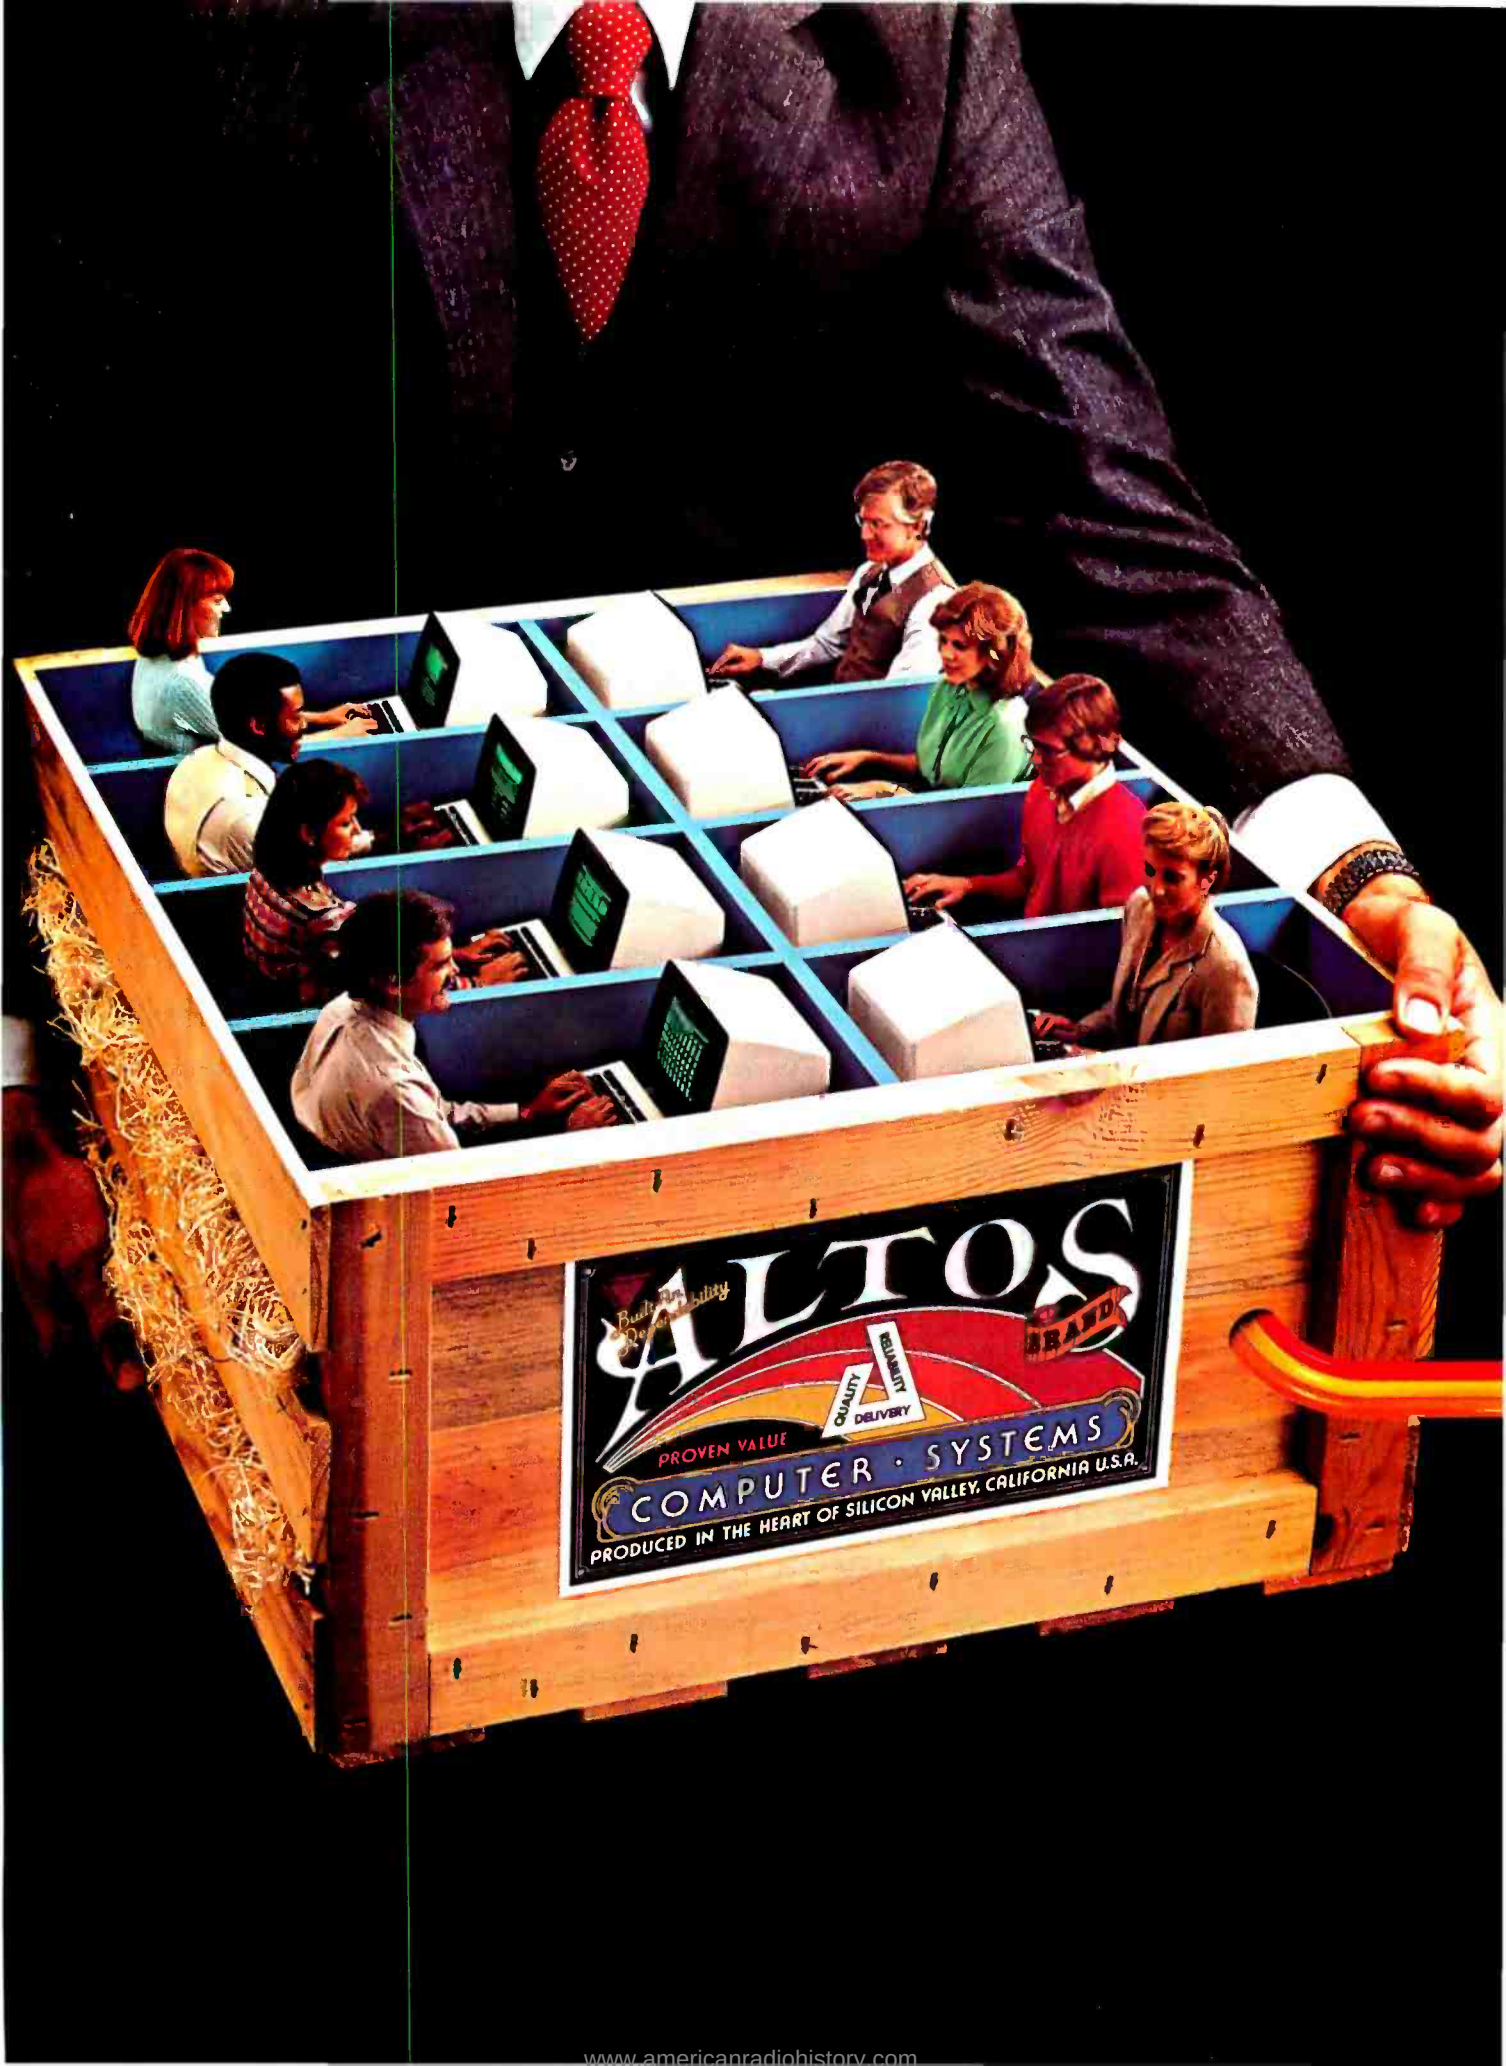

www.americanradiohistory.com

1 TO 16 USERS TO GO

Altos multi-user 8086 or 68000-based networking computers are chosen by more OEMs and Fortune 1000 companies. Here's why...

ALTOS® 16-bit computer systems do more for more users. They give you more power. More features. And more reliability. For less money.

You get a choice of 8086 or 68000-based family processors, memory management to one MB of RAM, an intelligent Z80™ I/O and disk controller, plus up to 160 megabytes of fast Winchester storage.

A single Altos computer can serve up to 16 users. And every Altos 16-bit computer gives you

added features like Multibus™ interfacing, real time clock, power fail detection and comprehensive diagnostics.

But that's just the beginning. Link multiple Altos' together and communicate in the office of the future today. Serve hundreds of users with full Ethernet™ and ALTOS-NET™ hardware and software support. And save money with fewer interconnects.

In addition, Altos supports remote communications protocols such as 2780/3780, 3270, X.25, and SNA/SDLC.

Altos has all the 16-bit software you need, too. With popular operating systems like XENIX™ / UNIX™ (with a user-friendly "business command menu interface"), CP/M-86,™ MP/M-86,™ OASIS-16, MS™-DOS and PICK for 8086-based systems; plus UNIX System III™ and RM/COS™ for 68000-based systems.

Altos also has high-level languages (BASIC, FORTRAN, COBOL and PASCAL), and applications software (ABS/86 and ABS/68 for general accounting, word processing and financial planning).

Since 1977, Altos has delivered more than 30,000 highly reliable, fully socketed, proven single board microcomputers and peripherals built for business.

If you've been looking to go with a more powerful computer that can serve from 1 to 16 users for less money, call or write us today.

Altos Computer Systems
2360 Bering Drive
San Jose, CA 95131
(408) 946-6700
Telex 171562 ALTOS SNJ
or 470642 ALTO UI

INTER-ALTOS LOCAL NETWORK

Series 586, ACS8600 and ACS68000
20-160 MByte Winchester
1-16 USERS with
ALTOS-NET

ETHERNET

Series 586, ACS8600 and ACS68000
20-160 MByte Winchester
1-16 USERS with
ALTOS-NET/UNET™

REMOTE COMMUNICATIONS

Series 586, ACS8600 and ACS68000
20-160 MByte Winchester
1-16 USERS with
ALTOS-NET/UNET
2780/3780
3270
X.25
SNA/SDLC

Packed with fresh ideas for business

ALTOS
COMPUTER SYSTEMS

800-538-7872
(In Calif. 800-662-6265)

Circle 18 on inquiry card.

ALTOS is a registered trademark and ALTOS-NET is a trademark of Altos Computer Systems. Ethernet is a trademark of Xerox Corporation. CP/M-86 and MP/M-86 are trademarks of Digital Research, Inc. MS and XENIX are trademarks of Microsoft Corporation. XENIX is a microcomputer implementation of the UNIX operating system. UNIX is a trademark of Bell Laboratories. UNIX System III is a trademark of Western Electric. RM/COS is a trademark of Ryan-McFarland, Inc. OASIS-16 is a product of Phase One Systems, Inc. PICK is a product of Pick & Associates and Pick Computer Works. Multibus is a trademark and 8086 is a product of Intel Corporation. 68000 is a product of Motorola, Inc. UNET is a trademark of 3Com Corp. Z80 is a trademark and product of Zilog, Inc.
© 1982 Altos Computer Systems.

www.americanradiohistory.com

MP/M II

The Multiuser, Multiprogramming Version of CP/M

Stephen Schmitt
2892 Sandhill Rd.
Mason, MI 48854

MP/M II, the revised version of the Multiprogramming Monitor for Microcomputers from Digital Research, is a powerful combination of valuable operating-system features that could become a dominant force in the advanced microcomputer market.

The operating system offers you significant advantages over conventional single-user, single-job systems: it makes more effective use of improved microprocessor technology, has a broader scope of applications, offers better programming and development facilities, and will even increase throughput for your system. The operating system supports real-time processing, timesharing, multiprogramming, and multitasking. MP/M II even provides capabilities for memory management, interrupt handling, extended file operations, system security, and sequential process management that are usually found only on larger systems.

Compatibility with CP/M software is assured because CP/M file structures, system calls, and command processing are all supported by MP/M II. All programming languages and software tools for CP/M should run on MP/M with little or no modification. Thus the available repertoire of CP/M applications and the large number of high-level languages that CP/M supports should provide MP/M II with a substantial supply of software.

Systems other than MP/M II are competing for prominence in the expanding microcomputer field. Unix or Unix-like systems and Oasis-16 from Phase One Systems are among its chief competitors. Currently, however, no clear consensus exists in the market for rating the various systems. In fact, many leading computer manufacturers are offering several operating systems as options to lure customers.

In this review, I will describe the MP/M II system and its operation, outline an application of the system, and analyze its feasibility for general microcomputer operation. Some of the concepts I'll touch on require a rudimentary background in operating-system fundamentals and a general knowledge of CP/M and related software. I've included a list of reference materials that will acquaint you with any unfamiliar subjects.

About the Author

Stephen Schmitt has worked for Hewlett-Packard and taught at Michigan Technological University. He is now doing a review of a version of the Ada programming language for microcomputers.

Overview

Briefly, MP/M II can be described as a multiple-user version of CP/M with enhanced processing capabilities. Each terminal presents its user with a CP/M-like environment that can manage more than one task at a time. The timesharing capability of MP/M II makes it seem as if the system is running several programs at once, thus allowing more than one user to operate the microcomputer at a time. This ability to run programs concurrently improves performance by using system resources more efficiently. Programs waiting for slow I/O (input/output) devices such as printers do not consume central processor processing time. Unlike some other timesharing systems, MP/M permits all active processes to reside in memory and thus a large amount of disk swapping is avoided. All this is handled by a real-time kernel program in MP/M II that supervises timesharing, handles requests as they happen, sets priorities for resource allocation, and coordinates the layered interrupt structure.

MP/M uses a simple file-system design that allows the user to access a broad class of mass-storage devices. The user also has access to very large RAM (random-access read/write memory) areas, even in 8-bit pro-

www.americanradiohistory.com

The new COMPAQ Portable Computer. IBM compatibility to go.

Simple, isn't it? The COMPAQ™ Portable Computer can do what the IBM® Personal Computer does. To go.

It runs all the popular programs written for the IBM. It works with the same printers and other peripherals. It even accepts the same optional expansion electronics that give it additional capabilities and functionality.

There's really only one big difference. The COMPAQ Computer is designed to travel.

Carry the COMPAQ Computer from office to office. Carry it home on the weekend. Or take it on business trips.

If you're a consultant, take it to your client's office.

If you use a portable typewriter, you can use the COMPAQ Computer as a portable word processor instead.

If your company already uses the IBM Personal Computer, add the COMPAQ Portable as a mobile unit that can use the same programs, the same data disks, and even the same user manuals.

There are more programs available for the COMPAQ Computer than for any other portable. More, in fact, than for most nonportables. You can buy them in hundreds of computer stores nationwide, and they run as is, right off the shelf.

With most other portables you'd probably need to buy an additional display screen because the built-in screen is too small for certain tasks, like word processing. The COMPAQ Computer's display screen is nine inches diagonally, big enough for any job, and it shows a full 80 characters across. And the built-in display offers high-resolution graphics and text characters on the same screen.

The bottom line is this. The COMPAQ Computer is the first uncompromising portable computer. It delivers all the advantages of portability without trading off any computing power capability.

And what do those advantages cost?

Nothing.

The COMPAQ Portable sells for hundreds less than a comparably equipped IBM or APPLE® III. Standard features include 128K bytes of internal memory and a 320K-byte disk drive, both of which are extra-cost options on the IBM. Memory and additional disk drive upgrades are available options to double those capacities.

In the standard configuration, the COMPAQ Computer has three open slots for functional expansion electronics as your needs and applications grow. It accepts standard network and communications interfaces including ETHERNET™ and OMNINET™.

If you're considering a personal computer, there's a new question you need to ask yourself. Why buy a computer that *isn't* portable?

For more information on the COMPAQ Portable Computer and the location of the Authorized Dealer nearest you, write us. COMPAQ Computer Corporation, 12330 Perry Road, Houston, Texas 77070. Or call 1-800-231-9966.

© 1983 COMPAQ Computer Corporation
IBM® is a registered trademark of International Business Machines Corporation.
ETHERNET™ is a trademark of Xerox Corporation.
OMNINET™ is a trademark of Corvus Systems.
Apple® is a registered trademark of Apple Computer, Inc.
COMPAQ™ is a trademark of COMPAQ Computer Corporation

COMPAQ™

PORTABLE COMPUTER

The most computer you can carry. Circle 500 on inquiry card.

www.americanradiohistory.com

cessor systems. File improvements such as separate user file areas, security options, and time-stamping features extend the standard CP/M file structure.

Fortunately, all enhancements of MP/M over CP/M are totally transparent to CP/M application software. Potential applications for MP/M II include office automation, real-time process control, advanced personal computers, information management, and software-development systems.

Two Versions

MP/M II is currently available for two popular microprocessor families: the 8080 family and the 8086 family. The 8086 version, MP/M-86, differs in memory management, code file structure, and its ability to support shared-code segments. Fortunately, these variations seldom affect user software. You can run the same program written in a high-level language such as CBASIC on both systems easily. Digital Research also supports programming tools for transporting assembly code from 8080 to 8086 machines. To avoid confusion, I will discuss only the 8080 version of MP/M II in this article.

Feature	Purpose
Multitasking	Several processes (tasks) can be executed concurrently. Any console can initiate multiple tasks. Each task is memory resident.
Task Priority	Tasks are assigned a ranking factor to ensure that critical tasks receive processor time.
Queuing System	Process communication Synchronization Mutual exclusion
Interrupts and Timing	Real-time control System clock Program scheduling Timesharing I/O device handling Delay and timing functions
Network Capability	Compatible with CP/NET (local area network). Enables resource sharing with other microcomputers.
Multiple-Console Environment	16 terminals or other character I/O devices can be simultaneously supported.
Multiple Printers	Spooling and access to several printers is now possible. Printers can vary in type and speed (maximum printers: 16).
Reentrant Code	Shared code allowed. Only one copy of code segment necessary for multiple invocations of a process. (MP/M-86: user programs and RSPs. MP/M-80: RSPs only.)
Memory Management	Memory-management technique is dependent upon microprocessor family. Memory protection is also supported (hardware-dependent). 8080 family: Bank-switching system 400K bytes total physical memory limit Maximum number of banks: 8 8086 family: Partition model technique Automatic allocation/deallocation Memory fragmentation recovery algorithm 1 megabyte total physical memory limit
File Password Protection	File locking to prevent unwanted concurrent access Shared-access methods for multiple users Security
Time Stamping	File creation or updating and accessing data are maintained to enhance file management.
Record Locking and Sharing	Individual records can be exclusively owned or shared in file-processing applications.
Increased Mass Storage	A maximum of 16 logical disk drives with a total capacity of 8 gigabytes of online storage. (Maximum file size: 32 megabytes. Maximum drive size: 512 megabytes.)

Table 1: *A summary of the features of MP/M II. These capabilities greatly expand the power of the standard CP/M 2.2 operating system.*

Features

The multitasking aspects of MP/M II significantly enrich the basic CP/M operating-system model, even though the user interface and the function of software utilities are virtually identical to CP/M. Extensions can be divided into three subject areas: process management, resource sharing, and file-system improvements. Table 1 summarizes these additional capabilities.

The command structure and system-entry points of MP/M II are a superset of those for CP/M. Old commands are virtually unchanged. This upward compatibility with CP/M was a prime objective in the design of MP/M. Also, many of the objections raised against CP/M and previous versions of MP/M have been addressed by MP/M II. Some rough spots still remain, however.

System Design and Operation

MP/M II is organized using a hierarchical approach. Figure 1 details the basic structure of the system and shows the relationships of the various system components. The layered structure permits successive levels of increasingly sophisticated functions. A component of one layer is logically dependent upon one or more underlying layer components. For instance, the user interface employs the TMP (terminal message process) to relay console data and the CLI (command line interpreter) to process user requests. TMP receives data from the console queues, which are in turn supplied with character input by a physical handler in the XIOS (extended input/output system). Access across more than one layer is permitted (e.g., direct XIOS calls) but not recommended.

MP/M II is also divided into modules, and the layers do not always correspond to these modules. They are grouped according to function and are distributed as separate software components. Briefly, the system modules are as follows:

www.americanradiohistory.com

A WORD TO THE WISE.

No one gives you more in an ergonomically engineered smart terminal than Wyse.

These days there's little room for waste of the corporate dollar. And these days the WY-100 smart terminal looks even better when you compare it to the other guys.

You definitely get more from Wyse — the leader in low-cost, high-performance, ergonomically engineered smart terminals.

To begin with, you get a great looking terminal that features die cast aluminum packaging and takes up a minimum of desktop space.

You also get a terminal with an uncanny way of pleasing people. It comes with an easy-on-the-eyes green phosphor screen. And a fully tilting/rotating display and detached keyboard. (After all, one person's just-right-tilt is another's not-quite-right-tilt).

When the workload seems impossible, horizontal and vertical split screen capabilities with independent scrolling allow you to be in two places at once.

There's more. You get programmable function keys and transparent print. Plus 128 characters with upper and lower case, line drawing and graphics, and a keyboard with 105 keys — including cursor pad, special mode and function keys.

Of course, all of this wouldn't mean much if you couldn't count on Wyse quality. That's why each WY-100 is put through an extensive on/off testing program.

On top of that, WordStar® and other emulations are now available from your distributor. Which means you can automatically get 32 of WordStar's most commonly used multi-key commands fully-implemented on our function keys for faster, easier use.

We think you'll be quite impressed when you compare the WY-100 to other terminals in its class. But don't take our word for it. Call or write us today. We'll send you detailed information on why the WY-100 smart terminal gives you more. A lot more.

WYSE TECHNOLOGY

3040 North First St., San Jose, CA 95134
(408) 946-3075 TLX 910-338-2251
In the East, call (516) 293-5563
Outside California, 800-538-8157 ext. 932
Inside California, 800-672-3470 ext. 932

WordStar is a registered trademark of MicroPro. Inc.
UL and FCC approved. ©1982 Wyse Technology. Inc.

Circle 465 on inquiry card.

www.americanradiohistory.com

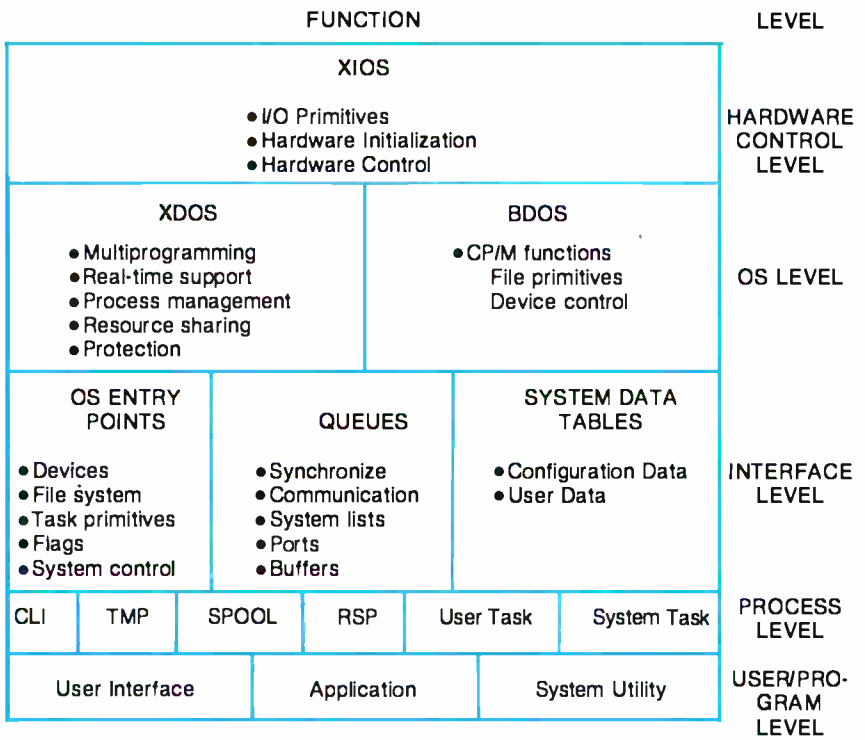

Figure 1: *A logical representation of the MP/M II system. Functional capabilities are divided into successive layers of increasing sophistication.*

At a Glance

Name
MP/M II (8080)
MP/M-86 (8086)

Type
Microcomputer operating system

Version
2.1 (May 1982)

Manufacturer
Digital Research Inc.
POB 579
Pacific Grove, CA 93950
(408) 649-3896

Price
MP/M II: $450
MP/M-86: $650

Format
CP/M single-density 8-inch floppy disk; 5¼-inch floppy-disk versions also available

Language
Digital Research PL/I and 8080 or 8086 assembler

Computer
8080-, Z80-, 8085-, 8086-, or 8088-based system with a minimum of 32K bytes of RAM

Documentation
5 softbound books (8½ by 11 inches): Users Guide, 176 pages; Programmer's Guide, 226 pages; System Guide, 161 pages; Link-80 Manual (for linker program, 8080 family only); RMAC Language Manual (for 8080 family)

Audience
Operating-system enthusiasts, CP/M users, microcomputer OEMs (original equipment manufacturers), hobbyists

BDOS (basic disk operating system) is an upward-compatible version of the single-user CP/M BDOS. It supports standard CP/M BDOS calls and adds extensions for multiple console and printer support. File-system enhancements are also included.

XDOS (extended disk operating system) contains the real-time program nucleus that monitors processes and manages system resources. This module supports the multiprogramming and memory-management capabilities of MP/M II. Included with it are the TMP and CLI for processing console input. The XDOS also contains other functions accessible by user programs.

XIOS, like the CP/M BIOS, provides the low-level hardware-dependent routines. This part of MP/M II must be customized for every computer system. By encapsulating the system-dependent functions, MP/M II can be hosted by various hardware implementations. Functions include console drivers, printer drivers, mass-storage primitives, hardware-initialization code, physical interrupt handlers, memory-management primitives (e.g., bank select), timing, and other I/O routines.

System Data Tables is a group of miscellaneous data tables containing global system parameters, information sets pertaining to each user, system stacks, active file lists, and system queues.

RSP (resident system program) and OS (operating system) processes include code, data, and process descriptors for system tasks. OS processes are differentiated from RSPs in that they must be included with MP/M II and are not system options.

System Parameter Area is a common memory area for communication between executing programs and the operating system. It occupies low memory (0–100 hexadecimal) and is compatible with the CP/M memory organization.

Memory layout plays a key role in the analysis of MP/M II's operation and programming. Figure 2 shows how memory is organized. Bank switching increases effective system memory capacity. The total physical memory is divided into blocks termed banks (usually 48K bytes). The system can switch a portion of the logical address space from one physical bank to another. Thus, even though the 8080 family of central processors can address only 64K bytes directly, multiple memory banks can be placed into the logical 64K-byte address space, thus increasing memory size and multiprogramming capabilities. Part of the operating system is stored in a portion of memory that's always active (i.e., never switched).

Make sure you don't confuse

www.americanradiohistory.com

SuperSoft FORTRAN

Now for CP/M-86®, MS DOS, and IBM PC DOS®

SuperSoft FORTRAN is the answer to the growing need for a high quality FORTRAN compiler running under CP/M-86 and IBM PC DOS. It has major advantages over other FORTRAN compilers for the 8086. For example, consider the benchmark program used to test the IBM FORTRAN in InfoWorld, p. 44, Oct. 25, 1982. (While the differential listed will not be the same for all benchmark programs, we feel it is a good indication of the quality of our compiler.) Results are as follows:

IBM FORTRAN: 38.0 Seconds
SuperSoft FORTRAN: 2.8 Seconds

In its first release SuperSoft FORTRAN offers the following outstanding features:

1. Full ANSI 66 standard FORTRAN with important extensions
2. Standard data types, double precision, varying string length, complex numbers
3. Free format input and free format string output
4. Compact object code and run time support
5. Special functions include string functions, dynamic allocation, time/date, and video access
6. Debug support: subscript checking, good runtime messages
7. Full IEEE floating point
8. Full 8087 support—available as option ($50.00).

Program developers:

SuperSoft's family of FORTRAN compilers means you can write your programs once and they will run under CP/M-80, CP/M-86, and MS DOS. This lets you get your applications running fast no matter what the environment.

The current compiler allows 64K code space and 64K data space with expansion anticipated in future releases.

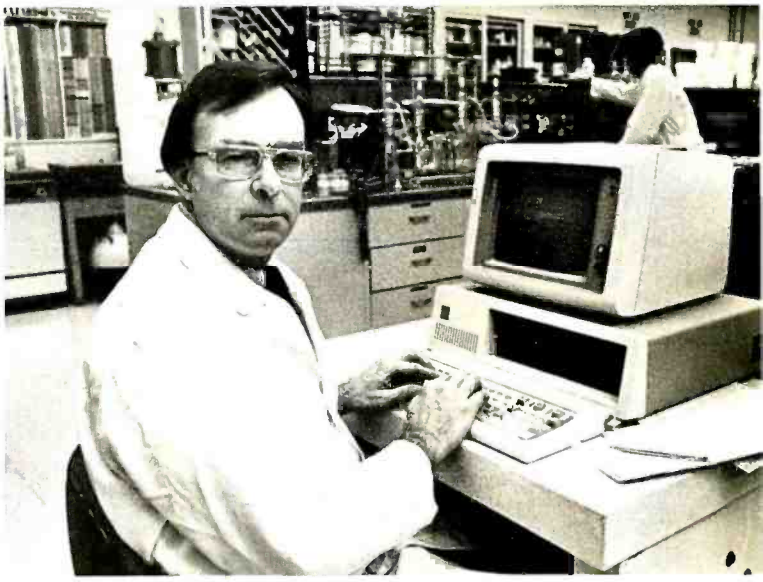

"At last, a FORTRAN compiler that works great on my 8086, 8087, and 8088 based systems!"

SuperSoft FORTRAN: available NOW and working great!

Requires: 128K with CP/M-86® and MS DOS
Price: $425 (in each environment)
CP/M-80 version also available.

In conjunction with SuperSoft, SuperSoft FORTRAN was developed by Small Systems Services, Urbana, IL, a leader in FORTRAN development.

CP/M and CP/M-86 are registered trademarks of Digital Research.

Japanese Distributor: ASR Corporation International, 3-23-8, Nishi-Shimbashi, Minato-Ku, Tokyo 105, Japan, Tel. (03)-437571 Telex: 0242-2723.

European Agent: Micro Technology Ltd., 51 The Pantiles, Tunbridge Wells. Kent, England TN2 5TH TEL 0892-45433. Telex: 95441 Micro-G.

Circle 407 on inquiry card.

SuperSoft®

FIRST IN SOFTWARE TECHNOLOGY P.O.Box 1628 Champaign, IL 61820 (217) 359-2112 Telex 270365

www.americanradiohistory.com

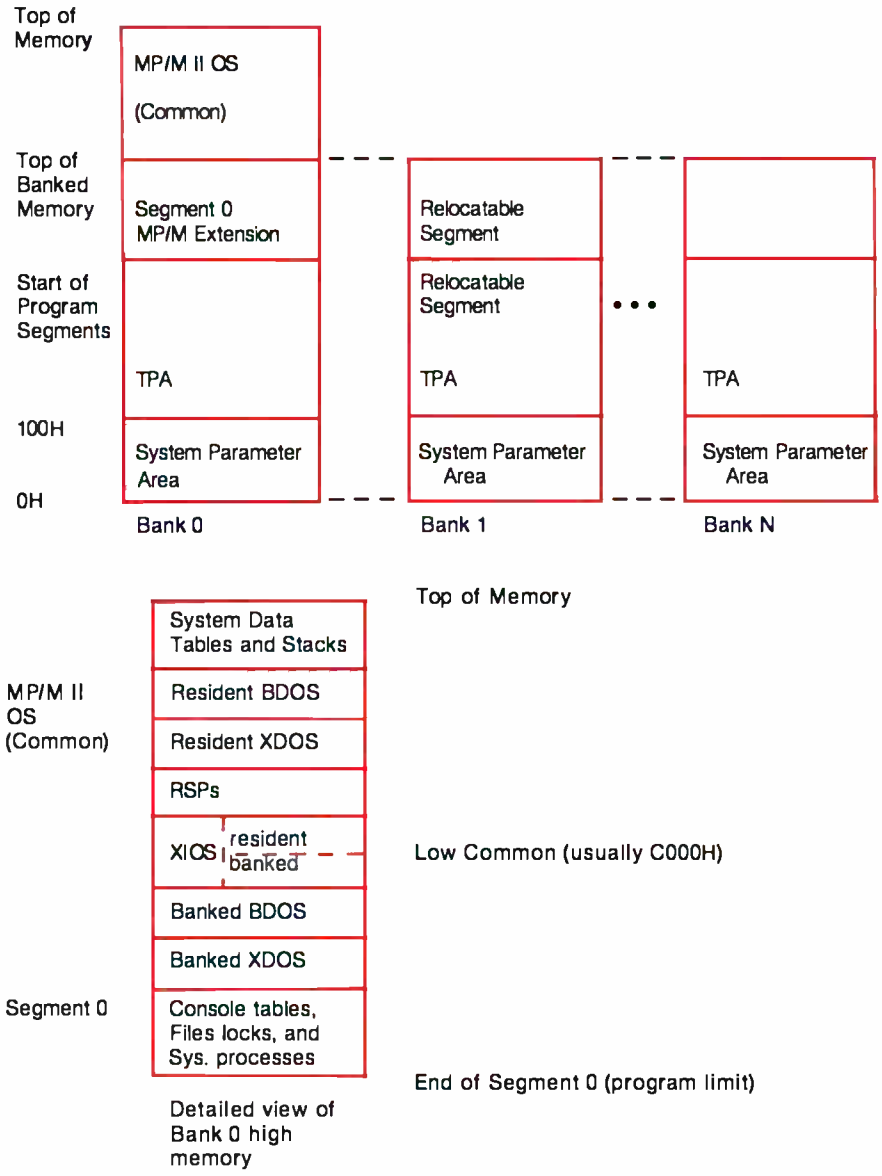

Figure 2: *(Top) MP/M II memory organization for the 8080 family of microprocessors. Note the flexibility for partitioning banks into segments. Transient-program area (TPA) segments are for CP/M programs. (Bottom) This figure details both the common segment that includes the MP/M II OS and segment 0. Note that in MP/M systems without memory banking, the banked versions of XIOS, BDOS, and XDOS are not required, which saves memory space.*

memory banks with memory segments. Memory segments are partitions of memory where program code can be loaded. A memory bank may have several segments. Transient programs must be loaded into segments for execution. For example, CP/M COM files must be loaded into the transient-program area (TPA) in low memory. Page-relocatable programs (PRLs) can run in any partition.

The common area, which is used by all banks, is located in the upper part of logical memory and contains the operating-system software. Segment 0 is a special partition reserved for system modules and RSPs. The division between the common area and segment 0 defines the top of banked memory. In banked MP/M II systems, XDOS, BDOS, and XIOS are broken into common modules and segment 0 modules. Buffers, queues, process descriptors, and operating-system entry points must be kept in the common area. File functions and higher-level operations that are accessed through system entry points can reside in segment 0 and need not occupy the logical address space of each bank. Memory management is done automatically. Programs are assigned to segments using a best-fit policy.

Operation

Operating MP/M II is straightforward, especially if you have a good understanding of the fundamentals of CP/M (see references on CP/M). MP/M II can be loaded by a boot routine from mass storage or it can be initiated by executing a special CP/M utility. Once the system is initialized, every terminal console displays a sign-on message and the standard system prompt. The console works very much like a single-user CP/M system. The system prompt differs from CP/M in its inclusion of a user number identifier; for example, "0A>" where 0 is the user number and A is the default drive. User numbers identify the file area associated with each console.

As in CP/M, a command is nothing more than an order to load and execute a user-written or system-supplied program file. The uniform strategy achieves both simplicity and flexibility (i.e., you can define your own commands or change the names of system utilities supplied with MP/M II).

Installation and System Generation

MP/M II software is designed for adaptation to a broad range of microcomputer hardware environments. Hardware independence with MP/M II is attempted through a fourfold strategy:

- MP/M II is written in a transportable high-level language.
- Hardware-dependent functions are encapsulated in a user-defined interface module (XIOS).
- Mass-storage functions are table-driven to simplify mapping physical disk systems to MP/M II's logical file system.
- A system-generation utility is provided to allow the user to specify the operating environment structure.

The majority of MP/M II is written in a PL/I dialect. In order to imple-

www.americanradiohistory.com

Qume *SPRINT 11 PLUS*

$1539.88 UPS DELIVERED

- 40 characters per second, bi-directional, logic-seeking printhead action
- Fully-formed, 96 characters, 10, 12, 15 & proportional spacing
- 1/48 inch line spacing and 1/120 inch character spacing (minimums)
- Parallel or RS-232C interfacing includes cable (please specify)

The Columbia *MPC*

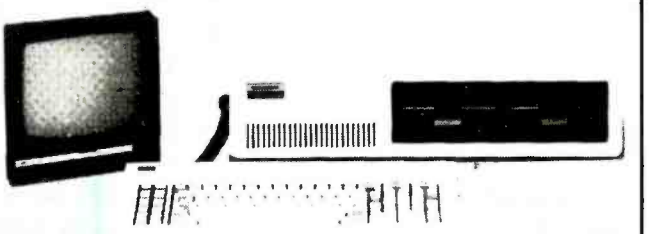

The Columbia **MPC** features full compatability with all IBM PC hardware and software, including MSDOS, MSBASIC, CP/M 86, FORTRAN, PASCAL, COBOL, CBASIC 86, etc. Comes with 128K RAM, two double-sided drives (320K per drive), two serial ports, one parallel port, and a keyboard port

Our package includes the Columbia **MPC** System (w/128K, two drives & 4 ports), the **Keytronics** keyboard, the Color Graphics Board, a **Pi-3** monitor & cable, and MSDOS (w/BASIC interp., diag., macro 86 assemb., etc). **$3733.40**, UPS delivered.

PRINTERS

Anadex
Anadex DP-9501A **$1409.88**
Anadex DP-9620A **$1499.88**

C. Itoh
C. Itoh Prowriter **$499.88**
w/RS-232C. **$609.88**
C. Itoh Prowriter 2 ..... **$734.88**
w/RS-232C **$789.88**
C.Itoh F-10 Starwriter, 40 cps
Parallel or RS-232C **$1499.88**
C.Itoh F-10 Printmaster, 55 cps
Parallel or RS-232C **$1799.88**
F-10 Tractor **$289.88**

Daisywriter

Daisywriter 2000. ..... **$1089.88**
Daisywriter Tractor **$149.88**
Daisywriter Cable **$49.88**

Diablo
Diablo 620 ..... **$1269.88**
Diablo 630 ..... **$1969.88**
Diablo 630 KSR **$2694.88**

TEC

DMP-65 Printer **$469.88**

Star Micronics

Gemini 10 ..... **$419.88**
Gemini 15 ..... **$539.88**

IDS
IDS Microprism **$579.88**
IDS Prism 80. ..... **$1104.88**
above w/graphics **$1189.88**
above w/sheetfeed. **$1294.88**
above w/4-color. **$1539.88**

PRINTERS

IDS Prism 132 ..... **$1269.88**
above w/graphics **$1339.88**
above w/sheetfeed. **$1459.88**
above w/4-color. **$1699.88**

Okidata
Microline 82A **$429.88**
62A Okigraph ROM. **$44.88**
62A Plug-n-Play (PC) **$39.88**
62A Tractor. **$59.88**
62A Roll Paper Holder **$49.88**
Microline 63A **$689.88**
63A Okigraph ROM. **$44.88**
Microline 84 w/graphics & tractor
Parallel, 200 cps **$1039.88**
Microline 92. ..... **$539.88**
Microline 93. ..... **$929.88**

NEC

NEC 3530 ..... **$1809.88**
NEC 3550 ..... **$2199.88**
3500 Tractor **$239.88**
NEC 7730 ..... **$2399.88**
NEC PC 8023A-C. **$509.88**

Smith-Corona
Smith Corona TP-1 ..... **$579.88**
Specify either 10 or 12 cpi,
& parallel or RS-232C interface

CALL FOR PRICES on Cannon, Centronics, Datasouth, Epson, Mannesmann Tally, Panasonic, Ricoh, Silver Reed, Transtar & others.

MONITORS

USI Pi-3 (12" amber) **$189.88**
USI Pi-4 (9" amber) **$159.88**

Amdek
Amdek 310G (12" green) **$199.88**
Amdek 310A (12" amber) **$199.88**
Amdek Color II (Hi-res RGB). **$769.88**
Amdek Color III (RGB) **$479.88**

Electrohome
Electrohome 1 (RGB) **$329.88**
Electrohome 2 (Hi-res RGB) **$579.88**
PC Cable **$49.88**

NEC
NEC (12" RGB) **$759.88**
NEC (12" Color) **$364.88**

Princeton Graphic Systems
HX-12 (Hi-res RGB) **$699.88**

MODEMS

DC Hayes
Hayes 300 Baud **$234.88**
Hayes 1200 Baud **$569.88**

Novation
Auto Cat. **$224.88**
1200 Auto Cat. **$569.88**

MODEMS

103/212 SmartCat **$499.88**
Novation D-Cat **$159.88**
Novation J-Cat ..... **Call**
Multi-Line Junction Box—allows a modem on multi-line phone systems. **$39.88**

IBM PC PERIPHERALS

Memory Upgrades
16K Ram Chips
Pkg of 9 ..... **$29.88**
64K Ram Chips
Pkg. of 9 ..... **$89.88**

AST Research
MegaPlus features two serial ports, one parallel port, a clock & software package (with SuperSpool and SuperDrive). MegaPack option gives 512K RAM to 256K Megaplus board.
MegaPlus 64K. **$539.88**
MegaPlus 256K **$774.88**
MegaPack. **$419.88**

Maynard Controllers
Floppy Disk. **$159.88**
w/Parallel Port. **$219.88**
w/RS-232C Port **$259.88**

MicroSoft
64K RAMCard **$284.88**

Quadram
Quadboards have memory, a parallel port, a serial port, a clock, memory and software (with RAMdisk & Spooler)
64K Quadboards **$439.88**
256K Quadboards. **$679.88**
The Quad 512 has memory and a serial port on board
Quad 512 Plus/64K **$399.88**
Quad 512 Plus/256K **$639.88**
Quad 512 Plus/512K **$889.88**
Single Function Cards for the IBM PC
64K Memory **$239.88**
192K Memory **$399.88**
RS-232C Card **$99.88**
Parallel Card w/cable. **$109.88**
Clock/Calendar. **$109.88**

QuCeS
Big Blue: 64K RAM, a parallel port, serial port, clock, Z80 co-processor and HD interface **$459.88**
12mB Hard Disk **$2159.88**
20mB Hard Disk **$2479.88**
40mB Hard Disk **$3699.88**

Tandon Drives
Single-sided. **$229.88**
Double-sided. **$299.88**

Xedex
Xedex Baby Blue **$534.88**
Xedex RAM Plus **$659.88**

Information & Orders
(603)-881-9855
Orders Only: (800)-343-0726

No Hidden Charges

FREE UPS shipping on all orders—No extra charge to use credit cards—All equipment shipped factory fresh with manufacturer's warranty—COD orders accepted ($10 fee added)—No purchase orders accepted—No foreign or APO orders accepted—Minimum $50 per order—This ad prepared in January: prices are subject to change.

Our Computer Showroom is now open in Amherst, NH

HIGH TECHNOLOGY AT AFFORDABLE PRICES

THE BOTTOM LINE

MILFORD, NH 03055-0423 □ TELEPHONE (603) 881-9855

Circle 60 on inquiry card.

www.americanradiohistory.com

ment MP/M on the different microprocessor systems, the designers had to modify the PL/I compiler so that it could emit specific machine codes.

Central to the portability strategy is the hardware-interface module XIOS. The module is a superset of the functions defined for CP/M's BIOS (basic input/output system). Operations found in the XIOS include interfaces to printers, disk systems, terminals, and other system-specific devices. Physical interrupt handlers, system timers, and memory-management functions are also defined.

The peripherals attached to MP/M II can be serviced via two methods: interrupts and polling. Polling is provided for low-speed I/O, debugging, and multiple-device processing for systems that lack interrupt facilities.

The XIOS is either written by a manufacturer distributing MP/M II with its computer system or it can be customized by an end user. Digital Research provides you with a skeleton XIOS module along with sample implementations for a few systems (e.g., Altos Computer Systems). The documentation for generating XIOS routines is clear and specific. XIOS is composed of approximately 25 functions and usually requires 5K to 6K bytes of code including buffer space.

Attributes of the mass-storage system easily map onto the logical file structure by use of parameter tables, which are called Disk Definition Tables. These tables define the characteristics of a particular disk system. Generation of the tables is done automatically by an MP/M utility. Disk systems ranging from simple floppy disks to the new Winchester-technology disks are effectively supported. Digital Research also supplies a disk blocking/deblocking procedure for increasing mass-storage performance. Blocking, a technique designed to improve access properties, allows a portion of disk storage to reside in main memory.

Integration of MP/M II software into a custom operating system is performed by the system-generation utility GENSYS. The system-generation process consists of (1) specifying system options, (2) collecting optional and required code segments into a single code file, and (3) layout of memory segments. Customizing the operating system enables you to fine-tune system performance, better match applications, and increase the software's overall flexibility.

The SYSGEN utility is simple, small, and easy to understand. It provides the minimum set of options necessary for flexible system design but doesn't bog down programmers with extraneous specifications. For the most part, the generation process facilitates the integration of host-computer hardware with the MP/M II operating-system software.

I found that developing MP/M II XIOS and configuring the software for my specific needs were not too difficult. Most problems resulted from misunderstanding hardware operation. The documentation on developing XIOS occupies an entire manual. The material should be carefully covered to minimize problems. I recommend implementing CP/M as the first step in creating an MP/M II system. Without CP/M, the generation procedure is not well documented and requires more effort.

Programming

Programming MP/M II software is a more difficult task than that for CP/M. In addition to the extra system functions offered by MP/M II, the multitasking features add an order of complexity. But with this extra sophistication you get a more powerful tool, and more work is possible per unit of computing equipment with shared access.

Processes and Data Structures

A *process* is an active program segment ready for execution in memory. MP/M II controls processes through a data structure termed a process descriptor. Process descriptors contain such information as process name, priority, status, device associations, file environment, and links to other processes in system queues. Process descriptors are created at the

Text continued on page 202

How to make dBase II™ work magic. It's a snap with Autocode™.

Finally, the first practical application of artificial intelligence in personal computer software. Autocode 1 is a powerful program generator for dBASE II. No prior knowledge of programming required.

AUTOCODE 1

- Automatic menus & sub menus
- Automatic data entry screens
- Automatic data entry routines
- String, numeric, date & calculated fields
- Automatic multiple reports

ONLY $200

- Automatic programs in dBASE II code with interactive screens
- No prior knowledge of dBASE II required
- CP/M & MS DOS operating systems
- Handy pocket size manual
- Average learning time only 4 hours

STEMMOS LTD.
666 Howard Street, San Francisco, CA 94105

Just send the following to address above today.

- Your diskette format & hardware
- How many Autocodes you want at $200 each.
- Your name & complete address
- A check or money order.

ORDER TOLL FREE 800-227-1617 (Ext. 417) IN CA CALL 800-772-3545 (Ext. 417)

Credit card buyers may substitute their card number and expiration date for the check. Or call us toll free and save the trip to the mail box.

MasterCard VISA

U.S. Address: 666 Howard St. San Francisco CA 94105/ Tel: (415) 777-3800
U.K. Address: 344 Kensington High Street, London W14 Tel: 01 602 6242

Dealer Inquiries invited
In California add 6% sales tax

dBASE II™ Ashton Tate
Autocode 1™ Stemmos Ltd

Circle 403 on inquiry card.

www.americanradiohistory.com

THE GIANT KILLER

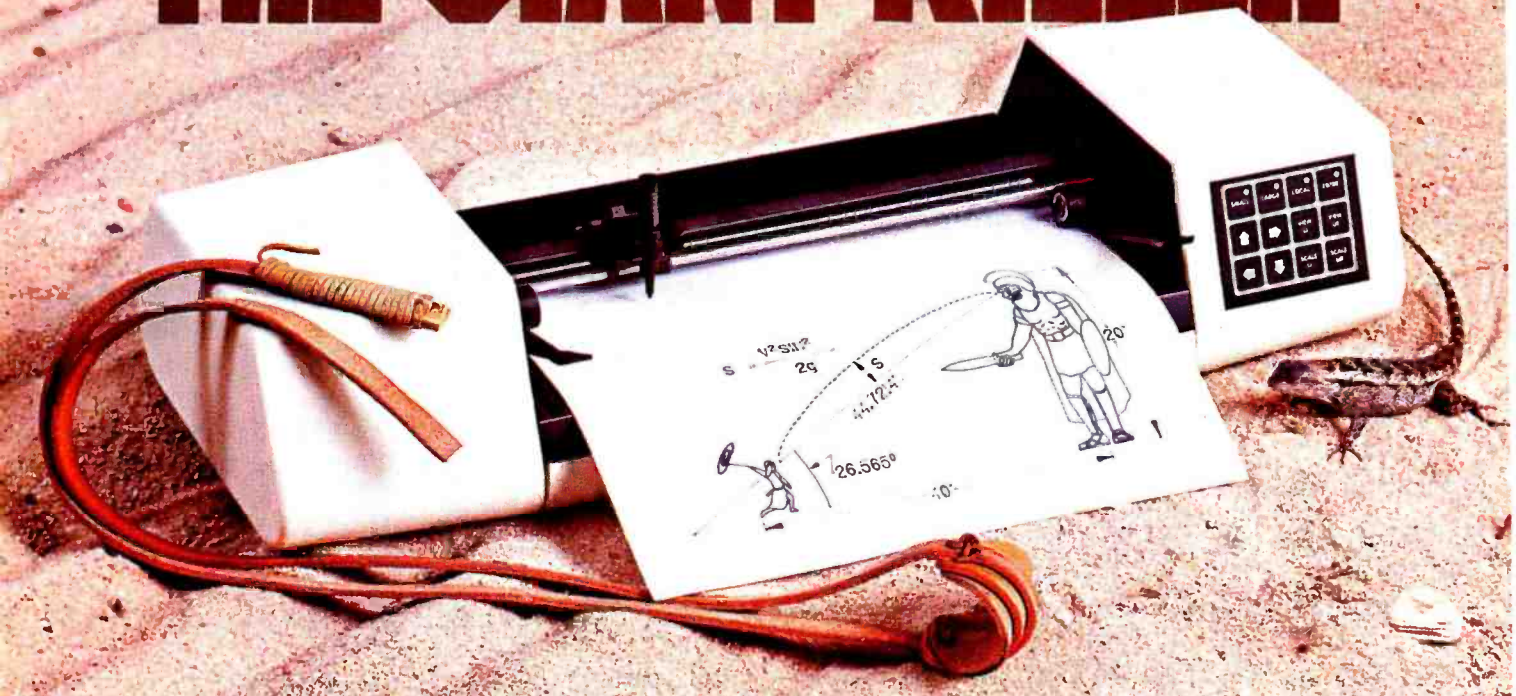

Vanquishes The High Cost Of Plotters

Small, smart and cost effective, the DMP-40 single-pen plotter puts big-plotter power at the command of the small-system user. With this amiable and competent aid at your side, you can create colorful 8½ x 11" and 11 x 17" graphics—images of professional quality for stand alone use, binding into reports or as overhead transparancies for group presentations.

Circles, arcs, ellipses and general curves are automatically generated by robust internal firmware, freeing you and your computer from wasteful low-level busywork.

By plotting in increments of only 0.005", you are assured of virtually step-free traces. The result is precisely defined graphics of high accuracy and solid repeatability.

Standard RS-232-C interfacing matches the DMP-40 to all current computers.

Multicolor plots on the DMP-40 are a simple matter since built in firmware and most commercial software provide 'pause' commands for pen changing.

These and more big-plotter capabilities are yours at small-plotter cost.*

For the name and location of your nearest distributor, call 512-835-0900 or 1-800-531-5205 outside Texas, or write Houston Instrument, 8500 Cameron Rd., Austin, Texas 78753. In Europe contact Bausch & Lomb NV, Rochesterlaan 6, 8240 Gistel, Belgium, Tel 059-27-74-45, Tlx 846-81399.

*US retail $995

BAUSCH & LOMB
houston instrument division

Circle 45 for literature. Circle 46 to have representative call.

www.americanradiohistory.com

CHOOSE THE SYSTEM BUILT-IN PERFORMANCE,

CompuPro system components deliver results in the toughest business, scientific, and industrial computing environments...from IBM, to NASA, to the local pizza parlor.

When you're integrating a high-level computing system, choose the same components chosen by the pros: IEEE 696/S-100 from **CompuPro.**

CPU Boards

CPU 68K. 68000 based board with sockets for memory management unit and up to 8K X 16 (16 Kbytes) EPROM. **$695** (8 MHz), **$850** CSC (10 MHz).

CPU 86/87. Includes sockets for 8087 math co-processor and 80130 firmware chips. **$695** (8 MHz), **$850 CSC** (10 MHz). Add $300 for factory installed 8087 (limits clock speed to 5 MHz).

CPU 8085/88. The original, much imitated dual processor board delivers 8 bit, 16 bit, or 8 *and* 16 bit computing. **$425, $525 CSC.**

CPU Z. Includes all standard Z80A features; downward compatible with most older S-100 mainframes. **$295, $395 CSC.**

CPU 16032. Features minicomputer-like, true 32 bit internal architecture.*

CPU 286. This iAPX 286-based board protects your software investment by running all existing 8086/8088 software, while creating new possibilities by combining an advanced instruction set with the use of four on-chip processors.*

Disk Controllers

Disk 1. High speed DMA floppy disk controller. **$495, $595 CSC.**

Disk 2. High speed DMA hard disk controller for SA4000/Fujitsu F2300 interface. **$795, $895 CSC.**

Disk 3. High Speed DMA hard disk controller for SA 1100/ST506 interface.*

CMOS Static 12 MHz Memory

RAM 16. 64K X 8 or 32K X 16 - works automatically with 8 or 16 bit systems. **$650, $750 CSC.**

RAM 17. 64K X 8; ultra low power. **$599, $699 CSC.**

RAM 21. 128K X 8 or 64K X 16 - works automatically with 8 or 16 bit systems. **$1350, $1450 CSC.**

RAM 22. 256K X 8 or 128K X 16 - works automatically with 8 or 16 bit systems.*

M-DRIVE/H™

M-Drive/H is a 512K memory board (cascadable up to 4 Megabytes for even more storage) which emulates disk drive operation and runs under CP/M® or MP/M™. **$1895.**
Increases operating speeds up to 3500%.

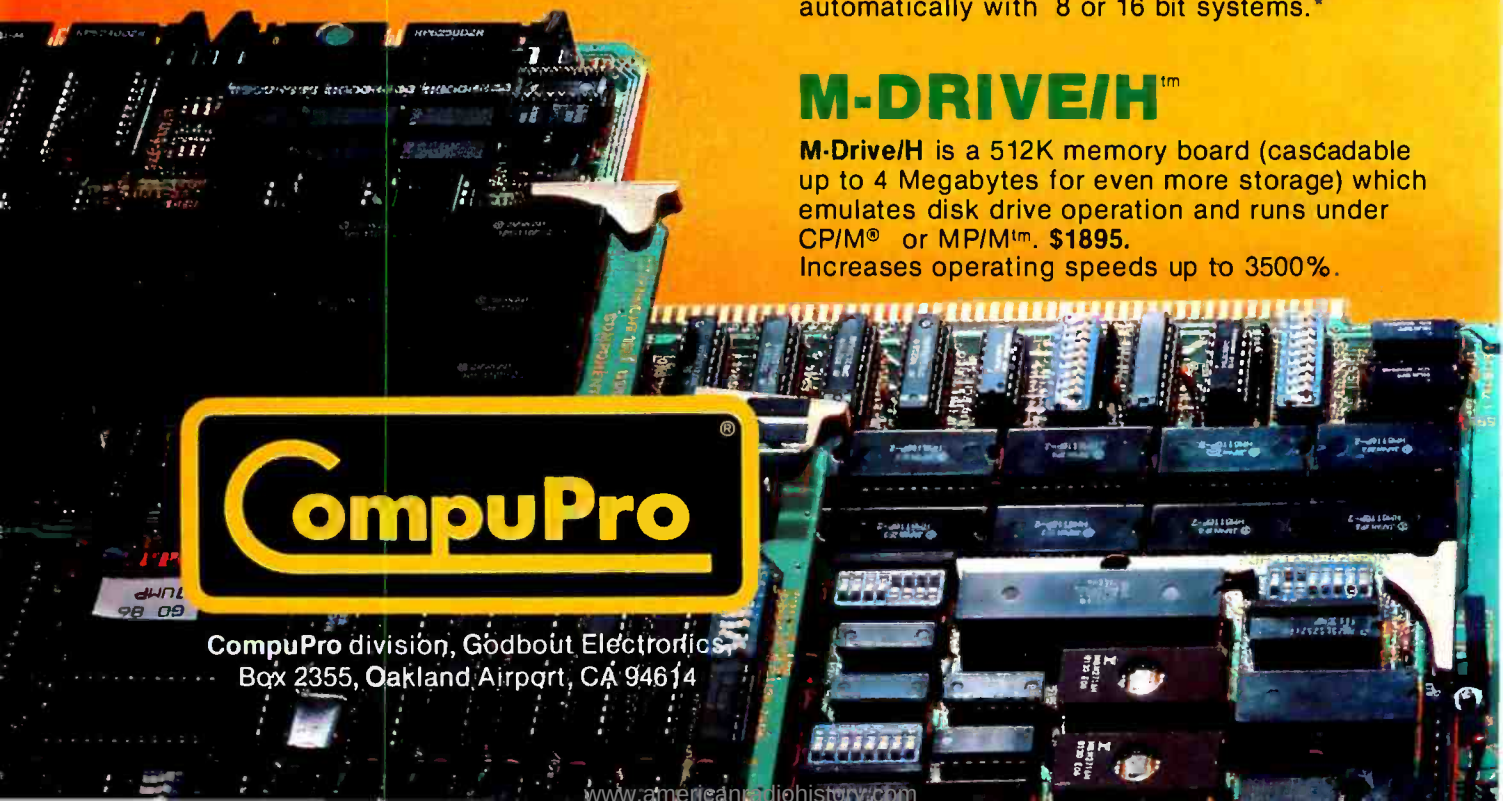

CompuPro®

CompuPro division, Godbout Electronics
Box 2355, Oakland Airport, CA 94614

www.americanradiohistory.com

COMPONENTS WITH QUALITY, AND RELIABILITY.

Dual Floppy Disk Sub-System

Two Qume Trak 842 drives provide over 2.4 million bytes of storage. With all-metal enclosure, Disk 1controller, rugged power supply, cables, *and software:*
Digital Research's CP/M 2.2 and CP/M-86™
Sorcim's SuperCalc-86™ spreadsheet, and
Ashton-Tate's dBase II™ data base manager.
$3295.

Desktop Enclosure 2

With shielded/terminated 20 slot motherboard, power supply, fan, dust filter, rugged all-metal construction. **$825 desktop, $895 rack mount.**

Interfacers

Interfacer 1. Two RS-232C serial ports. **$249, $324 CSC.**

Interfacer 2. Three parallel ports plus RS-232C serial port. **$249, $324 CSC.**

Interfacer 3-5. Five RS-232C serial ports (2 sync/async, 3 async). **$599, $699 CSC.**

Interfacer 3-8. Eight RS-232C serial ports (2 sync/async, 6 async). **$699, $849 CSC.**

Interfacer 4. Three RS-232C serial ports, one parallel port, one Centronics/Epson parallel port. **$395, $495 CSC.**

High-Performance Motherboards

Shielded with active termination. **6 Slots, $140, $190 CSC; 12 Slots, $175, $240 CSC; 20 Slots, $265, $340 CSC.**

System Support 1

Clock/calendar; RAM/ROM/math processor options; RS-232C serial port; interval timers and interrupt controllers; much more. **$395, $495 CSC.**

MPX 1

Multi-user system front end processor with 16K on-board RAM. **$649, $749 CSC.**

Documentation.

"Bits, Bytes, and Buzzwords" is a primer for those who want to get started right in business computing. 26 pages, softcover, **$2.50.** Request publication #B3.

"CompuPro Product User Manuals: 1975-1980". 250+ pages, softcover, **$20.**

"CompuPro Product User Manuals, Volume 2". 300+ pages, softcover, **$25.**

"Interfacing to S-100/IEEE 696 Microcomputers". By Mark Garetz and Sol Libes. 321 pages, softcover, **$15.**

Individual technical manuals also available.

Call **(415) 562-0636** for the location of the **CompuPro Authorized Sales Center** nearest you. **CompuPro** products are backed up by a one year limited warranty (two years for boards qualified under the **Certified System Component** high-reliability program).

Circle 92 on inquiry card.

*Consult factory for pricing and availability.

CP/M, CP/M-86, and MP/M are trademarks of Digital Research, M-Drive and M-Drive/H are trademarks of CompuPro, SuperCalc-86 is a trademark of Sorcim, dBase II is a trademark of Ashton-Tate.

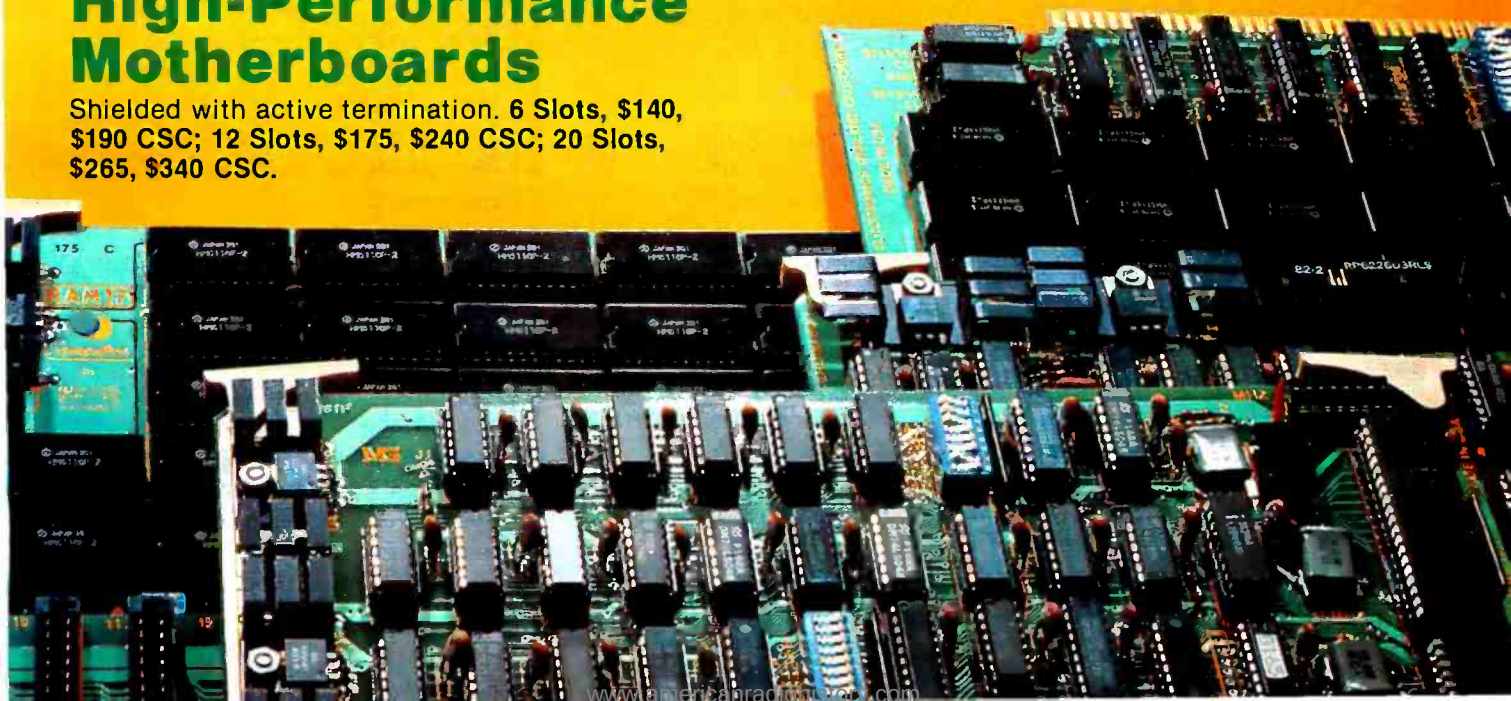

time the program is invoked by a system command.

MP/M II supervises the execution and resource allocation for various tasks in its role as a task coordinator. Task scheduling is done on a priority basis. Each task has an associated static priority. The scheduling algorithm selects the task with the highest priority as the one to execute next. In case of a tie, tasks are scheduled using a "round-robin" technique. Tasks with the same priority receive an equal share of the central-processor resource. Timesharing is facilitated by the fact that most CP/M and MP/M programs are assigned equal priorities. MP/M II permits 256 priority levels.

Queues and queue management play an important role in the design and function of the operating system. The basic function of the queue is to support the multitasking environment. A first-in, first-out pipeline transports data safely between processes. And queue data structures are maintained by the system. These act as "message files." Like files, they can be created, purged, opened, closed, read, or written.

Three types of queues are defined for MP/M II: mutual-exclusion queues, circular queues, and linked-list queues. With a mutual-exclusion queue, a process has sole rights to the associated resource. For example, listing to a printer requires a printer mutual-exclusion queue. When a process is writing to the printer, it owns the resource and blocks interference from other programs. This prevents undesirable accidents such as intermixing two source listings. The other two queue types perform the same function but differ in physical representation. Circular queues, which store messages in array structures, are employed when message size is between 0 and 2 bytes. Linked-list queues support messages longer than 2 bytes but have a considerably slower access time. Circular and linked queues are used for passing data between processes. Data messages can range from simple console-device character transmissions to sophisticated synchronization information between real-time tasks.

The File System

MP/M II's file system is an extensively enhanced revision of the file system used by CP/M and old versions of MP/M. Changes to the file structure are completely upward compatible. Mass storage is organized as a collection of logical drives. A drive may be a single mass-storage device like a floppy disk or a component of a large mass-storage peripheral. The system supports up to 16 drives that are identified as devices "A" through "P." Each drive is divided into two areas: a directory region and a data region. Files are grouped into 16 user areas in the directory. Files registered under a particular user number are usually accessible only by a user with the matching system user number. Data space for deleted files is automatically recovered, thereby eliminating the need for user packing.

Specifying a file in a command line differs from the CP/M convention in that a password may have to be included:

[*drive:*]*filename*[.*type*][;*password*]

where *drive* = A-P, *type* has a maximum of 3 characters, and *filename* and *password* have a maximum of 8 characters. If a file is password protected, it can be referenced only with the proper password or with the default-system password. MP/M II supports three levels of protection: read protection, write protection, and deletion protection. Password protection can be turned on or off for the entire system.

Another file-protection measure permits you to open files in either a locked or a shared mode. A locked file can be accessed by only one process at a time. Shared files can be referenced by several processes simultaneously. Files opened in the shared mode can have records of the file locked to an individual program. Record locking is an important attribute for many applications. For example, database systems often re-

$30 SOLVES THE BACKUP PROBLEM FOR CP/M 2.2

Qbax is a revolutionary new backup program which saves huge amounts of time for users of either floppies or hard disks by copying only files which have changed.

Incremental backup for CP/M 2.2 ■ Copies only files rewritten since the last backup ■ Handles multiple backups ■ Change or report the backup status of files ■ Redirectable I/O.

Amanuensis, Inc.
R. D. # 1 Box 236
Grindstone, Pa. 15442
(412) 785-2806

8" SSSD &
popular 5¼" formats
OEM inquiries invited

Qbax TM Amanuensis, Inc.
CP/M Registered TM Digital Research

Circle 19 on inquiry card.

www.americanradiohistory.com

Will this year's bells and whistles be next year's hoots and howls?

NOT IF IT'S A GIFFORD.

Freedom from obsolescence now costs less than $10,000 for 3 users. Because Gifford Multi-User Computer Systems, based on industry standard IEEE 696/S-100 with 20 bus slots, allow ample expandability and upgradability as new processors and peripherals are introduced. For example, up to four additional users can be added for only $600 each, plus terminal costs. All while protecting your investment.

That's why Gifford computer systems, with their dual processor CompuPro CPUs, have proven themselves to be THE SYSTEM for business and technical professionals requiring obsolescence-proof, hard-disk computers.

GIFFORD GIVES YOU THE BEST OF TWO SOFTWARE WORLDS.

We were the first company to develop a system that runs any combination of 8 and 16 bit CP/M™ programs simultaneously. So, if you go with Gifford, you'll *know* you can use the thousands of 8 bit CP/M programs available, PLUS any of the more powerful 16 bit programs . . . at the same time.

And, in addition to compatibility with all the CP/M software that's out there, you also get SuperCalc-86,™ dBase II,™ and MP/M-86 ™ FREE.

PRICELESS INFORMATION FOR THE PRICE OF A STAMP.

We invite you to cut out the coupon and mail it to us today. We'll send you a free brochure with detailed information regarding all the other advantages of going with Gifford. Such as, our exclusive networking and multi-tasking telecommunications packages, our two year warranty, complete service and support, system integration and custom application software. Plus all the benefits of selecting an IEEE 696/S-100 bus-based system.

MP/M 8-16 is a proprietary implementation of MP/M-86 and was configured for CompuPro by Gifford Computer Systems. CP/M and MP/M are registered trademarks of Digital Research. SuperCalc is a trademark of Sorcim. dBase II is a trademark of Ashton-Tate. CompuPro is a trademark of Godbout Electronics. Prices and specifications subject to change.

GIFFORD COMPUTER SYSTEMS

1922 Republic Avenue, San Leandro, CA 94577
(415) 895-0798 A division of G&G Engineering

I'D LIKE THE WHOLE STORY.
Please send me your brochure.

Name_____ Title_____
Organization_____ M/S_____
Address_____
City_____ State_____ Zip_____
Phone_____
☐ Please have a representative call me. BY

Other centers opening soon nationwide.

GIFFORD COMPUTER SYSTEMS CENTERS ☐ SAN LEANDRO, CA 94577 (415) 895-0798 ☐ SAN FRANCISCO, CA 94104 (415) 391-4570 ☐ LOS ANGELES, CA 90064 (213) 477-3921 ☐ OKLAHOMA CITY, OK 73112 (405) 840-1175 ☐ HOUSTON, TX 77046 (713) 877-1212 ☐

Circle 189 on Inquiry card.

www.americanradiohistory.com

File System Extensions	System Control
Record locking	Multiple-printer control
File locking/Shared access	Access console via terminal/message process (TMP)
Error-processing level	Access RSP (resident system program)
Password management	Send CLI (command line interpreter) a command line
Parse MP/M II file name	Access system data table
Access disk label	
System Clock Interface	Process Management
Set time and date	Run highest-priority task
Return time and date	Terminate task
Delay program	Create task
Schedule program	Set task priority level
Queue Operations	Memory Management
Read/Write to queue (conditional/unconditional)	Request memory segment
Create, Purge, and Open	Free memory segment
	Request CP/M transient-program area (TPA) segment

Table 2: *MP/M II BDOS functions not found in CP/M. Programmers can access a powerful set of new system functions.*

quire this capability. Files can also be designated "read-only"; thus several programs can read the file but cannot update the contents.

Time stamping attaches additional information to file-directory entries by indicating the times when a file was created (or updated) and last accessed. Even disk drives can have labels showing time stamp, name, and status information. This is a very important feature designed to give better support for business applications and software-maintenance procedures.

These additions to the CP/M file definition scheme have significantly improved file processing. A broad range of information-management applications are now feasible with these enhancements. But although both sequential and random-file I/O are present, the lack of ISAM (indexed sequential-access method), VSAM (virtual storage-access method), B-tree, or other direct-access methods is a notable weak link in the file system.

The User Environment and Command Structure

As mentioned earlier, the formats for MP/M commands are almost identical to those for CP/M commands. The only differences are the new MP/M commands that were not supported in CP/M.

For the most part, commands are simple and easy to use. One drawback of the command structure, however, is that you can't put multiple commands on a single input line. The MP/M II command-batching facility (SUBMIT) is also relatively primitive. Batching is a mechanism for processing groups of commands in a data file. The SUBMIT utility lacks such convenient features as parameter input, data prompting, or conditional command execution.

Like CP/M, MP/M II monitors special-character keyboard input. These control-character commands are used for line editing and device I/O management. MP/M II defines an additional character command: "D." This command detaches the currently executing process from the console or reattaches detached programs waiting to communicate with the console device. When you detach all of your programs, the console returns to the system command input state.

System error messages have been extended and improved over previous versions of the operating system. More information is given and several new classes of errors are reported. System function call errors give you more detail. Command entry errors provide supplementary information relating to new system features. However, I still find the error-reporting system shallow and incomplete. A more uniform approach to handling the several error sources should be adopted. Error messages need to be more meaningful and explanatory. A help facility for users would aid in error understanding and improve the overall quality of the user interface. Though the simple nature of the user interface is a big plus, MP/M II is often difficult for nontechnical people to comprehend.

System Functions

A collection of system entry points enables your programs to access a powerful set of primitives. Under CP/M, programs could make use of BDOS functions that primarily dealt with device I/O and file management. In MP/M II, system interface routines have been added to exploit multitasking capabilities and extensions to the file system. These new routines are defined in table 2.

System Utilities

System utilities directly interact with the system or provide access to system functions. Utilities can be subdivided into four groups: programming aids, system-generation programs, a file manager, and system interface routines. Because utilities are nothing more than file-resident programs, they can be modified or replaced in accordance with application requirements. Some programs correspond to the transient or built-in commands of CP/M. Table 3 lists M/PM utilities and briefly outlines their functions.

Multitasking

A real-time multitasking kernel located in the XDOS module manages program execution. Multitasking enables you to support many active tasks simultaneously. Although tasks may seem to operate in parallel, only one process really uses the central processor at a given time. The operating system maintains a list of

www.americanradiohistory.com

INVERSIONS

a catalog of calligraphic cartwheels

by Scott Kim

Foreword by
Douglas Hofstadter

Backword by
Jef Raskin

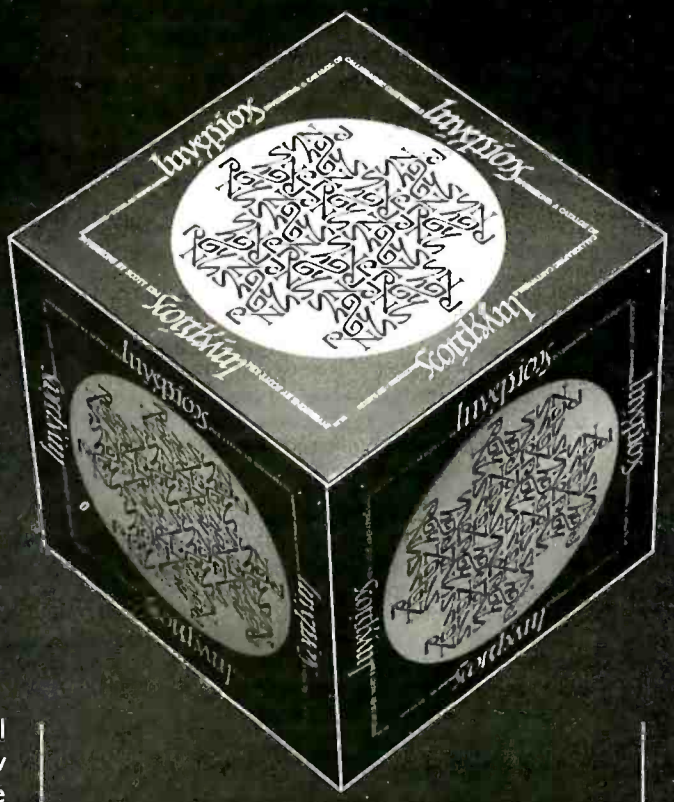

Illusion...calligraphy...visual magic—Scott Kim's new book, *Inversions*, delights the eye and enchants the mind. Filled with intriguing designs, words that read the same right-side up and upside down, words-within-words, and unexpected symmetries, these compositions create a fresh way to look at the alphabet. The text includes the visual principles of symmetry, lettering, and problem solving that are basic to these images. The author also draws parallels to related exercises in perception in such diverse areas as art, music, word play, and mathematics. Scott Kim's original inversion designs first appeared in *Omni* magazine, inspiring an overwhelming reader response. An irresistible challenge, invertible writing appeals to everyone who loves beauty in mathematics and design. Scott Kim is a doctoral student in Computer Science at Stanford University.

"Kim is the Escher-of-the alphabet. He has created a new art form that blends beauty and ingenuity and has made it so clear to us that we can try it ourselves if we so desire. It may well become the new amusement of the literate." **Issac Asimov**

"Scott Kim has perfected a personal art form—one with grace, elegance, subtlety, and surprises."
Douglas Hofstadter, author
Gödel, Escher, Bach: an Eternal Golden Braid

"...sure to dazzle and delight anyone to whom writing is dear."
The New York Times Book Review

"Scott Kim's *Inversions*...is one of the most astonishing and delightful books ever printed."
Martin Gardner Scientific American

ISBN 0-07-034546-5
128 pages
softcover
over 50 illustrations

BYTE Books
70 Main St.,
Peterborough, N.H.
03458

McGraw Hill

$8.95

www.americanradiohistory.com

Utility Name	Application Group	New for MP/M?	Description
ABORT	Interface	Yes	Aborts process specified in command line. I suggest this utility be designated as an RSP to ensure that it can run when all memory segments are in use.
ATTACH	Interface	Yes	Binds a process to the console at which it was started. Console I/O to the process is again permitted.
ASM	Programming	No	Central-processor assembler.
CONSOLE	Interface	Yes	Lists console number of terminal.
DDT	Programming	No	CP/M interactive debugging program.
DIR	File	No	Displays disk directory information. Lists only CP/M-compatible data.
DSKRESET	Interface	No	Reinitializes disk drives.
DUMP	File	No	Displays contents of specified file in hexadecimal format.
ED	Programming and File	No	Line-oriented text editor.
ERA	File	No	Erases file entry from directory.
ERAQ	File	Yes	Same as ERA except that it prompts you for confirmation before erasing. Some systems rename ERAQ to ERA to provide users with more protection.
GENHEX	File	No	Changes .COM file to .HEX file.
GENMOD	File	Yes	Converts .HEX file to .PRL format. .HEX file must be 2 concatenated, .HEX files offset by 100 hexadecimal.
GENSYS	Generation	Yes	Performs MP/M II system generation.
LIB	Programming	Yes	Creates library files from set of relocatable files (.REL).
LINK	Programming	Yes	Linkage editor for binding .REL files.
LOAD	File	No	Creates .COM file from .HEX file.
MPMLDR	Generation	Yes	Loads MP/M II operating system and starts execution.
MPMSTAT	Interface	Yes	Displays up-to-date status of system environment.
PIP	File	No	File/device data-transfer routine.
PRINTER	Interface	Yes	Displays or selects active printer for console.
PRLCOM	File	Yes	Converts .PRL file to .COM format.
RDT	Programming	Yes	Memory segment relocatable version of DDT.
REN	File	No	Changes file name.
RMAC	Programming	Yes	Relocatable macro assembler for central processor.
SCHED	Interface	Yes	Schedules a program to start execution at a specific time and date.
SDIR	File	Yes	Extended file/directory information-list utility. Allows you to view time stamps, file attributes, etc., across multiple drives.
SET	File	Yes	Sets file options.
SHOW	File	No	Displays disk-drive status and protection levels.
SPOOL	File	Yes	Primitive file-spooling program. CP/M also has a spooling utility.
STAT	File	No	CP/M-compatible utility used to display or modify disk/file status.
STOPSPL	File	No	Terminates active spooling.
SUBMIT	Interface	No	Command-batching facility.
TOD	Interface	Yes	Sets/displays current time and date. Valid only for systems with clock.
TYPE	File	No	Displays file contents in ASCII format.
USER	Interface	No	Sets/displays active user number.
XREF	Programming	Yes	RMAC cross-reference listing program.

Table 3: *System utility programs supplied with MP/M II.*

active processes, each of which may be in one of several states—ready-to-run, waiting on resource, terminated, waiting for flag (logical interrupt), and so on. The number of memory partitions limits how many programs can run concurrently. Although idle programs are not swapped to disk to free up memory, that doesn't limit the number of tasks that can be performed because several tasks can reside in a single program.

In terms of speed, Digital Research claims that a single-console MP/M II system compares in performance to CP/M 2.2. The overhead required for dispatching ranges from 7 to 15 percent. When multiple tasks are running, dispatching overhead may increase. I/O-bound processes are not degraded severely unless they are competing for the same resources. Priority and timesharing ensure fair distribution of the central-processor resource.

Resource Sharing

Resource sharing is realized through MP/M II's queue system. Devices that must be used exclusively by a given task—printers or the mass-storage system, for instance—are accessed via a mutual-exclusion queue. Printing requests require sequential processing, and disk access is provided to only one program at a time. Even systems incorporating multiple-disk controllers handle file requests sequentially. Reentrant RSPs such as the command line interpreter (CLI) are also obtained via queue operations. The CLI services those routines that have placed a message in its associated queue, CLIQ (command line interpreter queue).

Memory is allocated based on the list of memory partitions specified during system generation. Processes hold memory resources until they terminate or are aborted. The central processor is shared through a specialized queue, the process-ready list, which enables you to set the priorities of each task element. Deadlock detection and prevention measures are not fully supported by the operating system.

Text continued on page 210

www.americanradiohistory.com

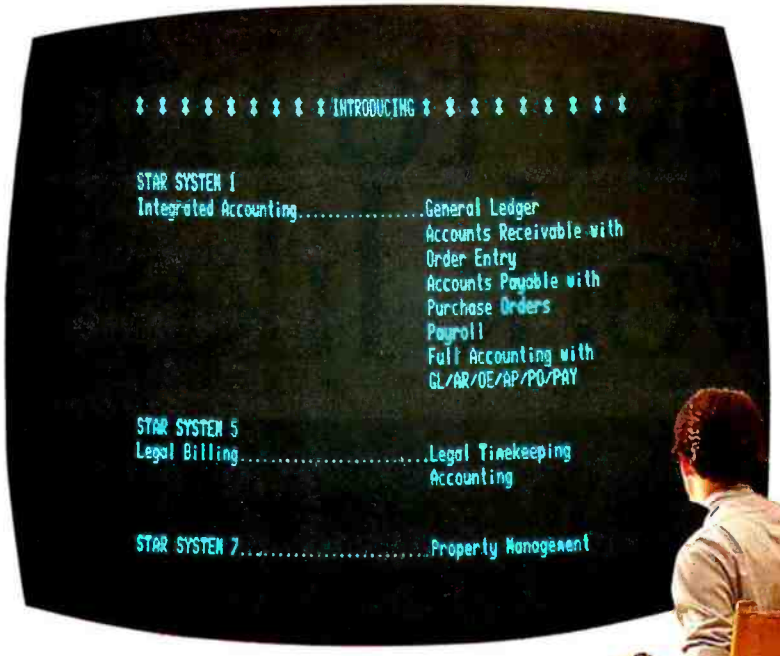

Now Showing

STAR'S FREE SOFTWARE

Like Your Screen Test Or Your Money Back

CP/M*, MP/M* and PC DOS** business applications software. They're all designed to run on microcomputers.

But screen test Star Software™ free for 30 days and preview dependable, quality programs that do even more for 25-50% less. When you install and use them, you'll see how smooth and easy your computer helps run a business. Load in any of Star's business packages and you'll find screen prompts to guide you all the way.

It's foolproof.

Whether you take Star's interactive accounting or legal or property packages, you can't help but notice how easy it is to get started.

Part of the reason is superb documentation. Instead of groping through support materials, like most other packages, Star produces references a businessperson understands. And because Star's software runs on the smallest to the largest computers, you get uncommon flexibility.

Many of the problems seen with other software companies don't exist with Star. It's the company that proves software packages don't have to be expensive, time consuming, hard to install or hard to use. Tall claims? Maybe. But talk to a Star owner. Better yet, screen test them yourself. After all, the only way to really judge software is to use it.

Individual accounting packages are priced at $400. Integrated Full Accounting at $1250. Legal Timekeeping and Accounting $950. Property Management $950.

Send us a check, we'll send you a full evaluation copy for any of the above packages to run for 30 days. Like it — keep it and the included program or — take us up on our money-back guarantee.

If for any reason you don't like what you see, return for a full refund. We think it's going to be love at first sight.

Dealer inquiries welcome. Call for our Dealer Profit Plan and source code prices.

There's No Business Like Show Business

☐ Here's my check, send me _____.
☐ I'm a dealer. I know the show must go on, send me Star's Incentive Plan.

Name _____

Company _____ Phone _____

Address _____

City/State/Zip _____

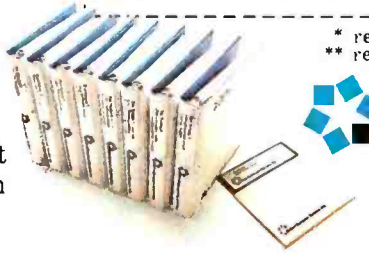

* registered trademark of Digital Research
** registered trademark of IBM

Star Computer Systems, Inc.
20600 Gramercy Place
Torrance, California 90501
(213) 538-2511

Circle 401 on Inquiry card.

www.americanradiohistory.com

How to mak
work like a

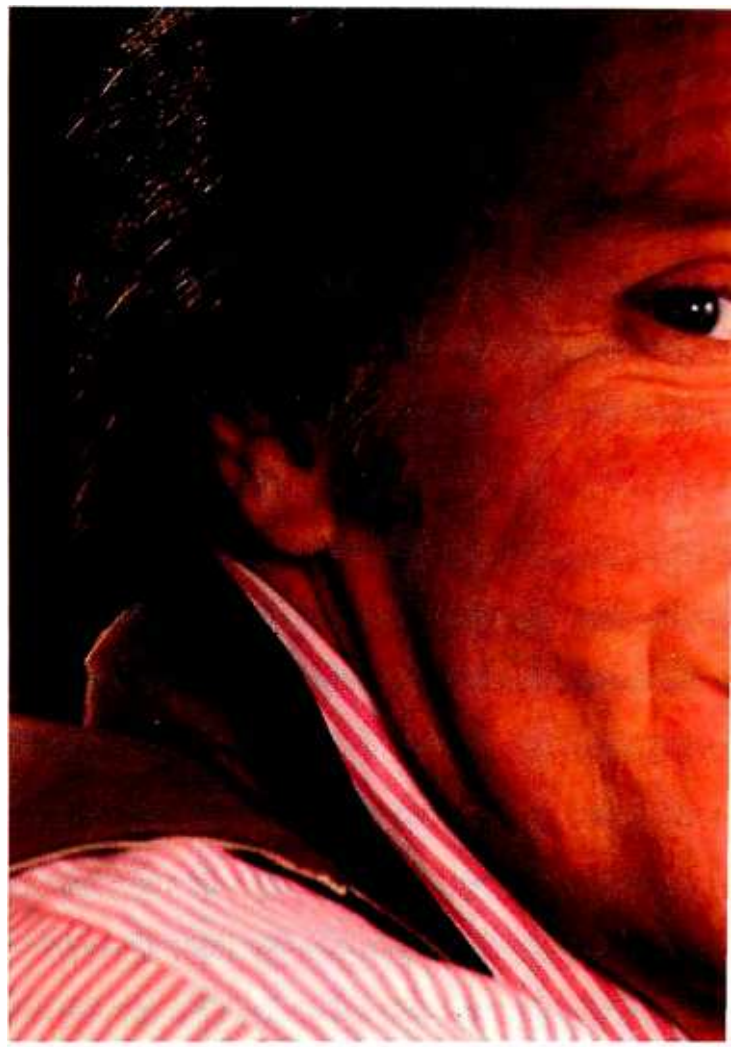

First, neatly cut out the "370" label.

Now, when nobody's looking, nonchalantly tape it to your terminal, just under the "IBM," as if it really belonged there.

Then wait for your chance and quickly slip a dBASE II™ disk into your main drive.

That's it.

Your IBM Personal Computer is now ready to run a relational database system, the kind that IBM put on their mainframes last year.

And you're ready with more data handling power than you would have dreamed possible before dBASE II.

You'll wonder how you managed without it.

You'll find that dBASE II, because it's a relational database management system (DBMS), starts where file handling programs leave off.

dBASE II handles multiple databases and simplifies everything from accounting to department staffing to monitoring rainfall on the Upper Volta.

With a word or two, you CREATE databases, APPEND new data instantly, UPDATE, MODIFY and REPLACE fields, records and entire databases. Organize months worth of data in minutes with the built-in REPORT. Do subfield and multi-field searches, then DISPLAY some or all of the data for any condition you want to apply.

And you've just begun to tap the power of dBASE II.

Easy to look at, easy to use.

Input screens and output forms couldn't be easier—just "paint" your format on the CRT and what you see is what you'll get.

You can do automatic calculations on fields, records and databases, accurate to 10 digits.

And you can use dBASE II interactively for answers right now. Or save your instructions, then repeat everything with two words: DO Manhours, DO ProjectX, DO whatever has to be done.

Use dBASE II to help make your choice:

If you've got a 96k IBM PC, send us $700 and we'll send you a copy of dBASE II to use free for 30 days.

www.americanradiohistory.com

e your micro mainframe.

Instead of just poring over a manual, run it and make sure that it does what you need done.

Then if you find it isn't right for you, send it back and we'll return your money, no questions asked.

But if you do that, you'll have to remove that label. Because nothing short of a mainframe works like dBASE II.

Call (213) 204-5570 today or drop by your local computer store for the rest of the story.

Ashton-Tate, 9929 Jefferson Blvd., Culver City, CA 90230.

Ashton-Tate

Circle 33 on Inquiry card.

©1982 Ashton-Tate
CP/M is a registered trademark of Digital Research

www.americanradiohistory.com

Central Processors Currently Supported

CPU	Maker	Bits
8080	Intel	8
8085	Intel	8
Z80	Zilog	8
Z108	Zilog	8
8086	Intel	16
8088	Intel	8/16
iAPX-186	Intel	16
iAPX-286	Intel	16

Potential CPU Support (projected)

CPU	Maker	Bits
Z8000	Zilog	16
M68000	Motorola	16
iAPX-432	Intel	32

Table 4: Central processors supported by MP/M II.

Application Example: Modem Service Routine

You are probably wondering at this point how all the new features and options can be applied to real programming situations. I'll sketch a simple real-life application that will highlight the capabilities of MP/M II. This program is only qualitatively described, but it offers you an insight into system programming and operation. Specifically, this example defines a program that handles modem access to an MP/M system.

A handy computer-system feature is the capability to call the computer from a remote terminal by telephone. Instead of having primitive I/O routines handle the operation in the XIOS, you might prefer to use an RSP that monitors an auto-answer modem and initiates communication. The process should perform the following functions: answering the phone, initializing communication handshaking (e.g., setting the DTR for the RS-232C serial port), checking for access authorization, recording the event in a log, finishing up, and waiting for the next call. The design process for such a program would be as follows:

•Write the program as an RSP. MP/M II will put the program in the ready list and begin its execution at system start-up.

•Add an interrupt handler to detect the asynchronous event of the call. Assume the serial port has the ability to cause an interrupt when the call comes in. The handler may be in the XIOS or RSP depending on hardware flexibility for adding interrupt code. The handler's sole function is to set a system flag.

•The RSP suspends itself while waiting for the call flag to be set. When set, the process is activated. The process should have a priority higher than normal application programs so that the call will not be missed during periods of high activity.

•Once activated, the RSP should clear the call flag. It then establishes communication with the modem by attaching the console representing the modem port. Once the communication link is set, the process sends a message to the console and waits for the password. The RSP may loop until a correct password is entered or terminate if an illegal ID code is entered.

•When the process accepts the user, it can send a log-in message to a queue attached to an accounting program or write a message in a file. The program releases (detaches) the console so that the TMP associated with the console can start normal MP/M II interaction with the modem terminal.

Perhaps programs such as the above will become available as MP/M utilities.

Hardware Specifications

MP/M II's design is relatively independent of the underlying computer hardware organization. Of course, the concept has practical limitations, but the MP/M II system has to date been implemented on a fairly large set of microprocessors (see table 4). And Digital Research is expanding the number of processors MP/M supports, with much emphasis being placed on 16- and 32-bit microprocessors. Memory systems can range from simple structures to virtual schema, banking, and page-mapped systems. Indeed, the new Zilog Z108 chip, a Z80-compatible microprocessor with on-chip memory management, would be an ideal MP/M environment. The mass-storage system is also quite flexible. Several mass-storage technologies with varying access properties are adaptable to the MP/M II file interface. Of course, terminals, printers, and other character I/O devices are necessary components of a complete system.

Internal Hardware

The minimal memory requirement for MP/M II is 32K bytes of RAM. Many valuable CP/M programs need a larger memory space than this, however, so I recommend at least 56K to 64K bytes. Banked or register-mapped memory that allows a physical address space greater than 64K is also highly recommended, especially in a multiuser environment. A good rule of thumb is 32K per extra user, but the more memory you have, the better.

Two other hardware components are critical for MP/M II systems: a clock/timer circuit and communications-interface hardware. Timer circuits are used for tracking time of day and generating interrupts for timesharing. The suggested "tick frequency" is between 50 Hz and 100 Hz. A Zilog CTC chip exemplifies a good selection for this application because of its adjustable frequency and interrupt-generating capabilities. Both serial and parallel I/O chips are valuable system components. Serial communications are necessary for terminals, printers, tape systems, EPROM programmers, and many other serial devices. Parallel ports can be used for Centronics interface printers and digital signal processing. In addition to these system peripherals, you might allocate a few extra ports for expansion and occasional communication functions.

Although a general interrupt system offers the best system performance, MP/M II can operate without interrupts by using a polling mechanism. But if a polling mechanism is used, system throughput declines and user programs must make dispatch requests to share resources. The type of interrupt schema is not critical because the operating system translates real interrupts into logical interrupts or flags.

www.americanradiohistory.com

board the bus

INDUSTRIAL QUALITY BOARDS FOR THE IEEE-696/S-100 BUS

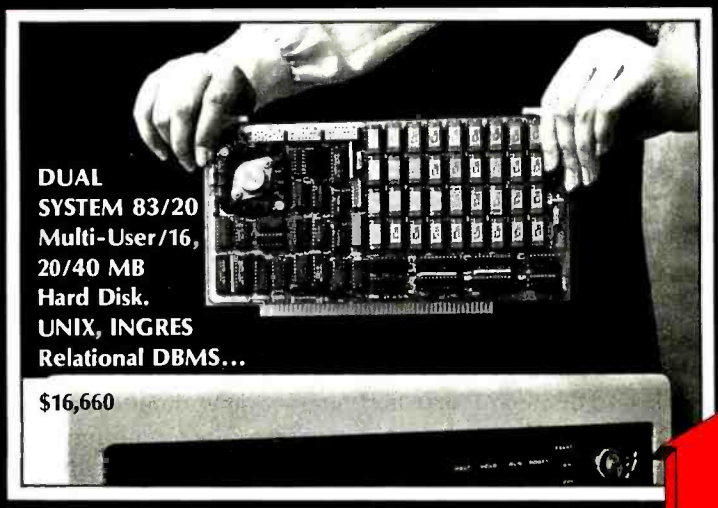

DUAL SYSTEM 83/20 Multi-User/16, 20/40 MB Hard Disk. UNIX, INGRES Relational DBMS...

$16,660

CPU GROUP

CPU 68000
- MC68000 processor
- 10 MHz operation
- 16-Mbyte addressing
- Single-user

$895

CPU 68000M
- MC68451 MMU
- Segmented memory management
- Multi-user

$995

MEMORY GROUP

DMEM
- 256K dynamic RAM
- 24-bit addressing
- 230 ns access

$1295

CMEM
- 8K/16K/32K CMOS
- 6 MHz for 8/16-bit
- Non-volatile with Li battery

$495/$595/$695

EPROM
- 32/64K ROM
- 16-bit data paths
- 24-bit addressing

$295

I/O GROUP

WDC-SMD
- DMA Winchester controller
- Reads entire track in one revolution, no interleaving

$1380

SIO4
- 4-port serial I/O
- 256 bytes of FIFO
- DMA transfers
- 24-bit memory addr.

$695

CLK-24C
- Real time clock
- LSI CMOS chip
- Li battery backup

$295

ANALOG GROUP

AIM-12 (A-to-D)
- 32 S.E. channels
- 25 µ-sec conversion
- 12-bit resolution

$695

VIC 4-20
- 4 channels
- 20 mA outputs
- 12-bit performance

$595

AOM-12 (D-to-A)
- 12-bit ±½ L.S.B.
- 0-10V, ±5V, ±10V jumper select outputs

$645

IEEE-696/S-100 BUS

DUAL

Sales representatives in most metropolitan areas.

OEM and Dealer pricing is available.

system reliability/system integrity

2530 San Pablo Avenue • Berkeley • CA 94702 • (415) 549-3854 • 172029 SPX

THE ULTIMATE IEEE-696/S-100 MULTI-USER SERIAL I/O CARD WOULD BE...

- **DMA DRIVEN**—Designed with fast, direct memory access for all output transfers.
- **POWERFUL**—256 character FIFO input buffer allows simultaneous high-speed traffic on all channels without any lost characters.
- **SMART**—On-board 8085 microprocessor off-loads the 68000 cpu.

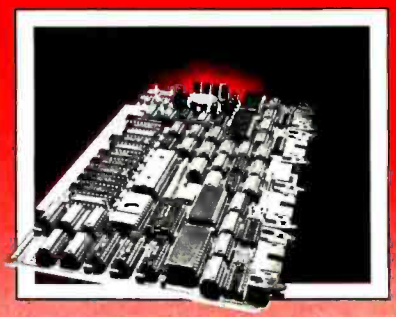

SIO4-DMA

- ☐ **FLEXIBLE**—Four RS-232C serial channels, each individually configurable as either DCE or DTE.
- ☐ **SOLID AND RELIABLE**—Each board is dynamically burned-in for 168 hours to insure stable performance.

AND WOULD...

- ☐ **HAVE SOFTWARE PROGRAMMABLE BAUD RATES** of 50 to 38,400 Baud on each channel.
- ☐ **INCREASE THROUGHPUT** significantly in multi-user configurations.

The SIO4-DMA has been field proven in DUAL's System 83, a 68000/UNIX®, multi-user, multi-tasking system.

SIO-4-DMA $695

*UNIX is a trademark of Bell Laboratories

DUAL

DUAL SYSTEMS CORPORATION

2530 San Pablo Avenue · Berkeley CA 94702 · (415) 549-3854 · 172029 SPX

Circle 157 on Inquiry card.

www.americanradiohistory.com

Mass-Storage Requirements

A variety of disk systems can be employed, ranging from 5¼-inch floppy disks to high-capacity hard disks. Also included are RAM memories that simulate high-speed drives. Because hardware-dependent functions are isolated in the XIOS and configurable attribute tables are used, customizing is easy. I suggest that any mass-storage system include an IBM 3740-compatible (8-inch) floppy system because it's the most popular software distribution format. For systems with several users, a hard-disk system is best. File bottlenecks usually result if floppy-based systems are accessed by too many people at the same time. Many disk systems are available for MP/M II applications. Most offer the necessary software for generating XIOS disk functions.

Other Peripherals

Systems may have an assortment of associated peripherals. Video-display terminals are expected for console devices. "Dumb terminals" with minimal cursor features are adequate for most program environments. Other serial devices such as teletypes, card readers, paper-tape punches, and so on can be connected as specialized console devices.

MP/M II does not directly support a magnetic-tape backup system, but tape systems controlled by an application program or integrated with some of the newer Winchester disks are common alternatives. Other equipment such as graphics terminals, modems, synchronous communication interfaces, and plotters must be operated via custom-written utilities.

Evaluation

Digital Research operating-systems software has been a dominant force in the microprocessor industry. With MP/M II, Digital Research hopes to solidify its position in the 8-bit market and set the trend for 16-bit microcomputers.

The goal for the MP/M II designers was to extend the CP/M model to a multiuser environment without losing compatibility with CP/M. The system is simple, easy to understand, and consistent. Real-time processing adds a valuable programming dimension. Hardware independence is another important attribute. Table-driven disk logic, the encapsulation of hardware-dependent functions, and good supporting documentation are all effective solutions to a complex problem. The well-defined set of operating-system interface functions is complete and plays an essential role in software portability. And MP/M II's queue system is excellent. Coordination of multiple resources is efficiently handled in a single logical mechanism. The queue model is simple, but it effectively supports process interaction without sacrificing performance. The resulting system is neither awkward nor superficial.

The file-system design and user interface are vital aspects of any operating system. In MP/M II, the file structure is an improved version of that of CP/M. The additional descriptive information, protection,

General Software

Mailing Address:
1454 S. 25th St.
Terre Haute, IN 47803
WE HONOR
VISA and MASTERCHARGE

TOLL FREE - Outside Indiana
ORDER DESKS ONLY
1-800-457-0517
For Information or Questions
(812) 234-9421
Not to be confused
with Software General

Outside US add $10 plus Air Parcel Postage. Add $3.50 postage and handling per each item. Indiana residents add 5% sales tax. Allow 2 weeks on checks. COD add $3.00 per item. Prices subject to change without notice. All items subject to availability.

Disk with Manual	Manual Only
ARTIFICIAL INTELLIGENCE	
Dental (PAS-3)	$775
Medical (PAS-3)	$849/40
Programable	$875
ASHTON-TATE	
*dBASEII	$525
BALCONES	
The Boss Fin. Acc. System	$1750
BYROM SOFTWARE	
*BSTAM	$149
*BSTMS	$149
CAXTON	
Cardbox	$225
COMPUTER CONTROL	
*Fabs (B-Tree)	$140/35
Ultrasoft	$140/35
CONDOR COMPUTER	
Condor I	$255/50
Condor II	$515/55
Condor II	$795/55
DIGITAL RESEARCH	
CP/M	
2.2 Intel MDS-800	$149
Northstar (Horizon)	$149
Micropolis	$169
TRS Model II	$159
CB-80	$429/45
PL1-80	$429/50
CBasic2	$ 98
BT-80	$190
8" only	
RMAC, Linklib, XREF	$190
Display Manager	$350
Access Manager	$279
DJR ASSOCIATES, IWC	
FMS80	$775
FMS 80-1	$400
FMS 80-2	$400
ECOSOFT	
Microstat	$275
EPIC COMPUTER	
*Super vyz	$115/25
FAIRCOM	
*Micro B+	
(Specify language)	$229/30
FINANCIAL PLANNING	
*Mini Model	$429/50
FOX & GELLER ASSOCIATES, INC.	
Quickscreen	$140
Quickcode	$225
FRONTIER SOFTWARE	
Professional	
Time Accounting	$499/50
General Subroutine	$269/50
Application Utilities	$439/50
FYI, INC.	
Superfile	$155
PASCAL LANGUAGE	
Pascal Z	$349/40
Pascal MT+ V5.5	$429/40
Compiler	$316/25
SPP Only	$165/15
KEY BITS	
Wordsearch	$179/50
String 80	$ 84
String 80 (Source)	$279
LEXISOFT	
*Spellbinder	$349/55
MARK OF THE UNICORN	
FinalWord	$255
MICRO AP	
Selector IV	$249
Selector V	$449/50
MICRO TAX	
*Level I	$195
*Level II	$995
*Level III	$995
Microsoft 5.3	49
Run time module	
MICRO PRO®	
Call for NEW LOW PRICES	
MICROSOFT	
Basic-80	$279
Basic Compiler	$319
Fortran-80	$379
Cobol-80	$579
M-Sort	$180
Macro-80	$154
MuSimp/muMath	$224
MuLisp-80	$174
Multiplan	$245
NORTHWEST ANALYTICAL	
*Statpak	$409/45
OASIS	
*"The Word"	$ 75
The Word Plus	$140
PEACHTREE® SOFTWARE	
General Ledger	$399
Accounts Receivable	$399
Accounts Payable	$399
Inventory	399
Mailing Address	$399
for P8 Version	add $119
Series 6-Peachtree	
CPA	$799
Passive Payroll	$449
Series 7-Peachtree	
SalesTracker	$3049
AR-Sales Analysis	$1299
Inventory	$799
Order Entry	$699
REDDING GROUP	
*Lynx	$199
RYAN-McFARLAND CO.	
RM/Cobol	$650
SORCIM	
*Pascal/M Z80	$349/40
Pascal/M 86/88	$449/40
*Act 65, 68, 69, 86, 88	$149
*Trans 86	$119/25
*Supercalc	$229
SOUTHERN COMPUTERS	
Call for our unbeatably low prices.	
STRUCTURED SYSTEMS GROUP	
GL, AR, AP, PR, OE	$849/50
SUPERSOFT	
*Diagnostic II	$ 84/20
*Forth	$149/30
*SSS Fortran	$219/30
*Fortran w/RATFOR	$289/35
*C Compiler	$175/20
*Tiny Pascal	$ 80/25
*Disk Doctor	$ 84/20
*Term I	$129/25
Term II	$169/25
Scratch Pad	$210
Dataview	$165
Stats Graph	$165
Combination of above 3	$495
Z8000 Xassembler	$449/35
WHITESMITHS	
C Compiler	$700/40
Pascal (incl C)	$900/45
IBM PERSONAL COMPUTER	
Wordstar 3.2	$295/60
Mailmerge	$150/25
Supercalc	$229/NA
Visicalc (256K)	$229/NA
Optimizer	$200/NA
Supersoft C - CP/M86	$500/NA
Peachtree 3 Pak GL, AP, AR	$595
Final Word	$265
Condor I, II, III	CALL
Statpak	$439
BSTAM	$149
Move-It	$129
Easy Writer II	$315
Easy Speller	$155
Easy Filer (dBase mgr.)	$335
Spellbinder	$355/49
Concurrent CPM 86	$335
Pascal MT & 86	$360
SPP 86	$180
AM Cobol	$800
APPLE II DOS	
Word Handler II	$155
Listhandler	$ 85
Broderbund Software	
General Ledger (w/ A/P)	$435
Payroll	$325
Professional Easywriter	$155

* Available for Apple with Softcard

7

Circle 187 on inquiry card.

www.americanradiohistory.com

and file-sharing attributes that are provided are very useful. However, a hierarchical structure similar to Unix would vastly improve the organization of file information. And file-access methods for data processing are notably absent. As for the user interface, it is simple and understandable. Error processing is good, but it could be much better. A help utility, input correction, and multiple command lines are necessary improvements.

Documentation

Documentation for MP/M II departs from the old standard for microprocessor literature; it is clear, concise, and informative. The manuals are well organized and make it easy for you to locate key ideas. Numerous examples and a straightforward format help you to understand difficult concepts. Three manuals are included: a Users Guide, a Programmer's Guide, and a System Guide. Each contains a separate summary, table of contents, index, and (except for the System Guide) glossary. Print quality is only fair. I found few errors and typographical mistakes.

Each manual addresses a different MP/M II user audience: the general applications user, the system programmer, and the system manager or architect. The Users Guide describes program operation and the user interface, the Programmer's Guide explains system structure and programming guidelines, and the System Guide outlines procedures to customize MP/M II for your own hardware. In addition to these three system manuals, documentation for the linker program (LINK) and the relocatable macro assembler (RMAC) also comes with the MP/M package.

Although MP/M II systems can support up to 16 consoles, 6 to 8 active users is probably a more realistic number.

Performance

System performance under load is reasonable because of low system overhead and faster microcomputer components. MP/M II's efficiency can be attributed to its compact code size (15K bytes) and a manageable system-function set. A single-user MP/M II system is 7 percent faster than a CP/M 2.2 system. Unlike CP/M, MP/M II does not reload part of the operating system after command calls, so it saves disk-access time.

A major bottleneck with multiple-user MP/M II is the mass-storage system. To maintain file integrity, only one task at a time can access the file system. Thus high disk I/O activity substantially degrades performance, especially if requests come two or three at a time. Because of the disk-intensive nature of program development and business applications, a hard disk is advisable for systems with more than two users. Floppy systems are too slow to handle the traffic involved in loading commands, running word processors, compiling several programs, and so on. A blocking/deblocking algorithm can improve disk response; however, the size of available main memory is reduced by the size of the disk buffer that would be involved.

If there are a large number of users, a few concessions must be made. As the number of terminals increases, data-transmission rates decrease and buffering methods become necessary. Slow data-transmission rates could be improved by a more sophisticated spooling system. Although MP/M II systems can support up to 16 consoles, 6 to 8 active users is probably a more realistic number.

Scope

Multitasking real-time control and process management are necessary for most industrial and scientific computing jobs. Monitoring a home, con-

Oct 78 Byte **Computer Chess** $7.95

COMPUTER CHESS!

The poster shown at left is an enlarged reproduction of the October 1978 Byte cover "Computer Chess." The poster is 18 in. x 22 in., and is a beautiful full color reproduction of the original painting by Robert Tinney.

Perfect as a gift for both chess and computer enthusiasts, each print is only $7.95, plus $3 per order shipping.

To order, use the convenient coupon below.

Please send me _____ Computer Chess posters for $7.95 each, plus $3 shipping and handling ($8 overseas). ☐ I have enclosed check or money order ☐ Visa ☐ MasterCard

Card No. _____

Expires: _____

SHIP MY PRINT(S) TO:

Name: _____

Address: _____

City: _____

State: _____ Zip: _____

robert tinney graphics

1864 N. Pamela Dr. • Baton Rouge, LA 70815

www.americanradiohistory.com

trolling a small plant operation, or simple robotics are potential MP/M II applications. The interrupt facility in conjunction with queue operations facilitates the handling of asynchronous processing and ordering of priority requests. The small overhead imposed by the operating system makes real-time programming feasible.

Several MP/M II features will help those users who are involved in program development. The file-stamping option, for example, is a useful concept for keeping track of an evolving source code. A large set of applications can be conveniently addressed by the large selection of programming languages available for CP/M. In particular, some language processors like Pascal/MT+ support a program-development system similar in concept to the Ada run-time environment. Companies making CP/M compilers are modifying their systems to incorporate the novel features of MP/M II (e.g., record locking and shared access). Word processors, file utilities, and debuggers streamline the programming process. For large programs, MP/M II supports chaining of programs. Overlay linkers are also available for CP/M-compatible software. Well-defined system functions and a small operating-system "nucleus" form a flexible base for building complex programs.

MP/M II would also make a viable office-automation system. CP/M database systems, word processing, accounting programs, inventory systems, and so on are offered by a variety of software firms. Multiple-user capability coupled with CP/M information and planning software provide the necessary features. The ability to support networking further enhances MP/M II's position in this market.

Conclusions

MP/M II offers features and processing power comparable to many large computer operating systems. Three of these features—multitasking, real-time programming, and networking—address a class of useful applications that range from efficient multiple-device control to full-scale distributed processing. Task management and communication is effectively handled with the queuing system. The user interface and enhanced file system make it much easier to use general-application programs.

The operating system is well designed, but it lacks some features that are necessary for some commercial requirements. File-system organization and access methods are not adequate for information management. Also, although security, user accounting, and man-machine interfacing are significant issues in a business data-processing environment, MP/M II, like other microprocessor operating systems, does not fully address them.

Several operating systems that have been designed for the latest microcomputer technology have impressive capabilities. Whether the MP/M II operating system is the best of these is debatable. I do not intend to make such a claim. Instead, I would point out two critical factors by which to judge microprocessor operating systems: hardware independence and the availability of software applications. A universal operating system must provide a standard interface, independent of a computer's word size and components. More important, an extensive software base is mandatory for a useful system. MP/M II is founded on these premises and should prove to be a leading microprocessor operating system. ■

References

1. Mark Dahmke, "Introduction to Multiprogramming," BYTE, September 1979, p. 20.
2. Thom Hogan, "Osborne CP/M User Guide." Berkeley, CA: Osborne/McGraw-Hill, 1981.
3. Kenneth J. Johnson, "Microcomputer Timesharing," BYTE, April 1979, p. 224.
4. Gary Kildall, "CP/M: A Family of 8- and 16-bit Operating Systems," BYTE, June 1981, pp. 216-232.
5. Steve North, "The CP/M Disk Operating System," *Creative Computing*, November/December 1978, pp. 52-53.
6. Allan C. Shaw, "Logical Design of Operating Systems." Englewood Cliffs, NJ: Prentice-Hall, 1974.

DUCES TECUM

LAWMATE™

Bring Justice To Your Documents, Briefs, Pleadings and Contracts.

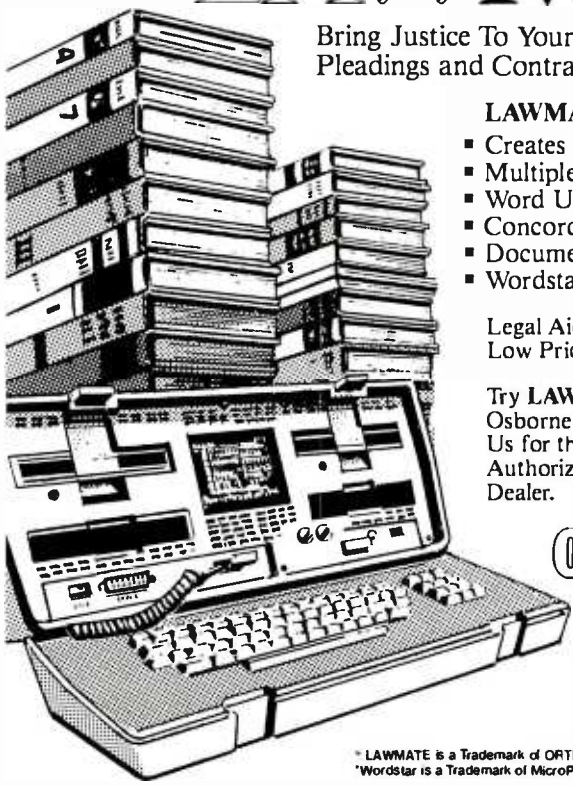

LAWMATE Features:

- Creates Table of Authorities Cited
- Multiple Document Indexes
- Word Use and Consistency Analysis
- Concordance Generation
- Document Line Numbering
- Wordstar* Compatible

Legal Aid at an (Almost) Unlawfully Low Price.

Try **LAWMATE** at Your Local Osborne Computer Dealer, or Call Us for the Name of the Nearest Authorized ORTHOCODE Textware Dealer.

ORTHOCODE
The Textware Company

THE ORTHOCODE CORPORATION
P.O. Box 6191
Albany, CA 94706
(415) 753-3222

* LAWMATE is a Trademark of ORTHOCODE CORPORATION
*Wordstar is a Trademark of MicroPro International

Circle 326 on inquiry card.

www.americanradiohistory.com

There is a word that describes your choices in flexible disks today. That word is "ordinary." The woods seem to be full of offerings of middling quality, neither good nor bad, not necessarily cheap but not overly expensive for the most part, products that are just so-so, just average, just...well, just ordinary.

But now there's a new word in flexible disks. Ultra Magnetics. A word that redefines the state-of-the-art in flexible disk price performance rather than reinforcing the current state-of-the-marketplace. By itself, *Ultra* means "extra ordinary." And by itself is where you'll place the Ultra Magnetics product when you have a chance to compare it to others.

The superb engineering and meticulous manufacturing of each Ultra Magnetics disk clearly shows. A proprietary jacket provides more consistent jacket dimensions and lower torque that result in better auto-loading and longer life. A special lubricant built into each disk surface enhances both disk and head durability. And 100% surface testing of each and every Ultra Magnetics disk ensures the highest data reliability. Our Ultra Magnetics product line currently includes single- and double-sided 5.25-inch disks. Soon, it will feature 8-inch disks as well. For a fact, they are more expensive than some of the garden variety alternatives. But considering the performance and the reliability, Ultra Magnetics is a surprisingly attractive value.

Here's the bottom line. You no longer have to put up with what you may have sadly come to expect from flexible disks. And we encourage you to take the next logical step from the usual to the remarkable—from the ordinary to the extraordinary. Call your local supplies distributor and ask for Ultra Magnetics.

ULTRA MAGNETICS

Ultra Magnetics Technology, Inc.
7 Hangar Way
Watsonville, CA 95076
(408) 728-7777

EXTRA ORDINARY

Circle 440 on inquiry card.

www.americanradiohistory.com

QUADBOARD™

THE FIRST AND ONLY BOARD YOUR IBM PC MAY EVER NEED.

Your IBM personal computer is a very versatile piece of equipment. Perhaps more versatile than you realize. New applications and functions are being developed every day. Now with Quadboard by Quadram you can keep your options open for tomorrow's technology. Following in the tradition of Quadram Quality, four of Quadram's best selling IBM boards have been combined into one board. Your remaining slots will be left free and available to accommodate future expansion needs and uses which you may not even be able to contemplate today.

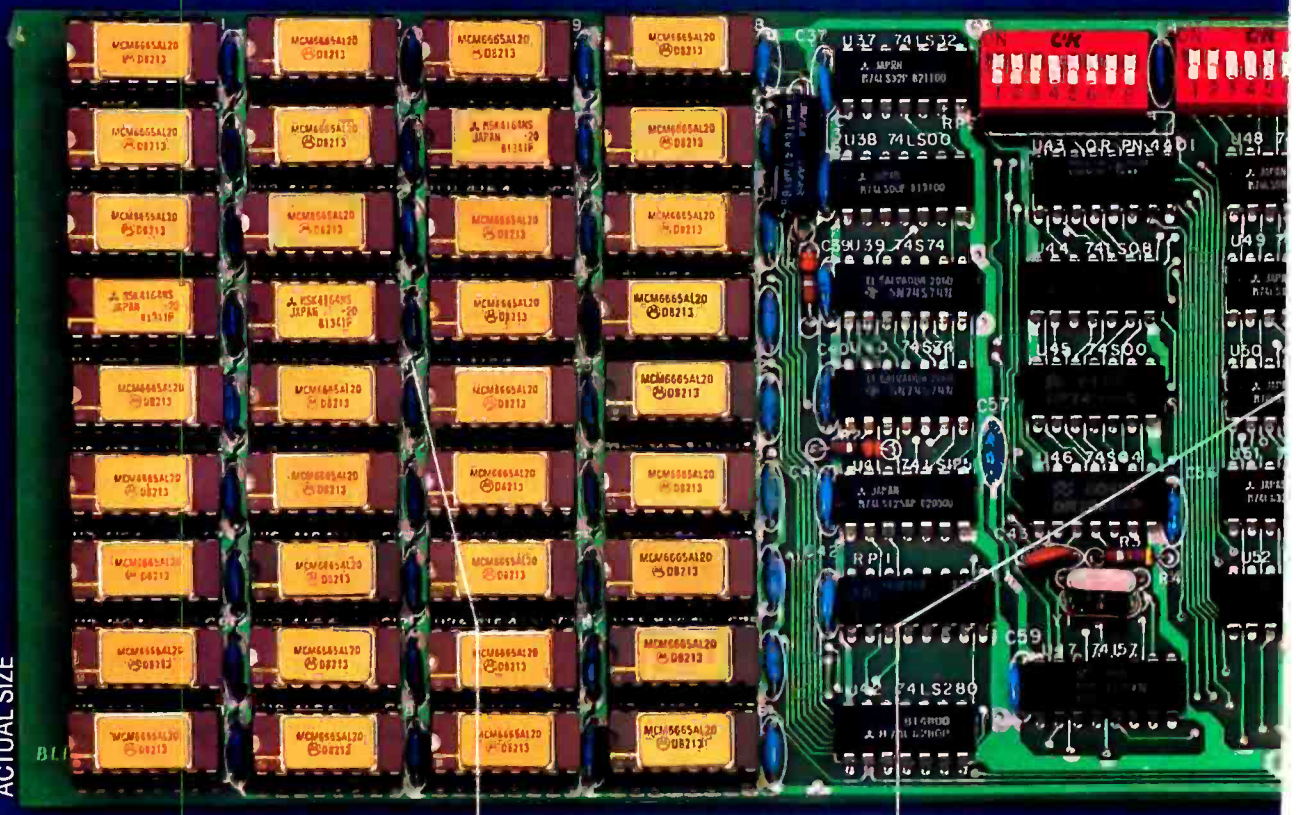

PROVEN DESIGN.
Quadram has been shipping IBM boards with each of the Quadboard functions on separate boards since December, 1981. They are still available as separates (including a Dual Port Async Board) for those who desire a quality board but do not need to keep slots open for future expansion. And they all come with a one year warranty from the leader in technology applications.

256K MEMORY EXPANSION.
Socketed and expandable in 64K increments to 256K, full parity generation and checking are standard. A Quadboard exclusive feature allows parity to be switch disabled to avoid lock-up upon error detection. The dip switches also allow it to be addressed starting on any 64K block so that it takes up only as much as it has memory installed. Memory access and cycle time naturally meet all IBM specifications.

CLOCK/CALENDAR.
Quadboard eliminates the hassle of manually inputting the date on system boot-up by providing for the clock and all software routines necessary for inserting the appropriate programs on your diskettes. The internal computer clock is automatically set for compatibility with most software routines which utilize clock functions. On-board battery keeps the clock running when the computer is off.

SEE OUR AD ON PAGE 423

www.americanradiohistory.com

BY QUADRAM

ALL ON ONE BOARD
Now you can utilize all the PC's capacity with Quadram's extremely flexible configurations. And it's totally compatible with IBM hardware, operating systems, and high level languages. It's a full-size board that can be inserted into any free system slot and it even includes a card edge guide for securely mounting the card in place.

SOFTWARE TOO!
With Quadboard you receive not only hardware but extensive software at no extra cost. Diagnostics, utilities, and Quad-RAM drive software for simulating a floppy drive in memory (a super-fast SOLID STATE DISK!) are all part of the Quadboard package.

$595
with 64K Installed

PARALLEL PRINTER I/O.
A 16 pin header on Quadboard is used for inserting a short cable containing a standard DB25 connector. The connector is then mounted in the knock-out hole located in the center of the PC backplane. The parallel port can be switch disabled or addressed as Printer 1 or 2. No conflict exists with the standard parallel port on the Monochrome board. The internal cable, connector and hardware are all included.

ASYNCHRONOUS (RS232) COMMUNICATION ADAPTER.
Using the same chip as that on the IBM ASYNC board, the device is software programmable for baud rate, character, stop, and parity bits. A male DB25 connector located on the back connector is identical to that on the IBM Async Adapter. The adapter is used for connecting modems, printers (many letter quality printers require RS232), and other serial devices. Switches allow the port to be configured as COM1 or COM2 and the board fully supports IBM Communications Software.

INCREDIBLE PRICE!
Priced at $595 with 64K installed, $775 with 128K, $895 with 192K and $995 with 256K.

ASK YOUR DEALER.
All products are sold through local personal computer dealers. If yours does not stock Quadram, please ask him to call us at (404) 923-6666.

QUADRAM CORPORATION

4357 Park Drive / Norcross, Ga. 30093

Circle 366 on Inquiry card.

www.americanradiohistory.com

Sage in Bloom, Zeke II, CBIOS Traps, Language Debate Continues

The consummate computer user tackles his new writing machine, and other tales from Chaos Manor.

Jerry Pournelle
c/o BYTE Publications
POB 372
Hancock, NH 03449

I have three pages of notes on what I should write about this month, and if I finish the list I'll double BYTE's already amazing thickness—and still not be caught up with either hardware developments or the flood of useful software that's pouring out for microcomputers. There was a time when I could pretend to be, if not familiar with, at least *aware* of nearly everything going on in the microcomputer world. No longer. I hear about many developments, for which I thank my numerous correspondents, but there's no way anyone can keep up with the explosion.

Meanwhile, we have two new systems at Chaos Manor: a new writing machine and a Sage II that runs UCSD Pascal for the fastest time yet in my benchmark.

I can't keep up, but what the hell, it can't hurt to try . . .

The Sage in Bloom

I first saw the Sage 68000-based machine at the 1982 West Coast Computer Faire. Then at Wescon/Mini/Micro I saw another and got to talking with Sage's president, Rod Coleman.

About a week ago our Sage arrived. I'll be writing a lot about it as time goes on.

My first impression is that I love it. The Sage is a working machine. Mine has a half megabyte of memory (some of which can be configured to be run as "RAM disk," that is, as a memory simulation of a disk, exactly like the Compupro M-Drive or Semidisk Systems' Semidisk). It has two double-sided double-density 5¼-inch disk drives; those disk drives, I must confess, are part of the reason I'm changing my mind about small disks, because we've been working the dickens out of the Sage and we haven't had a disk glitch (or any other kind of glitch for that matter).

It's a handsome machine. It is also quite small; the whole thing—disk drives, power supply, computer, and all—takes up considerably less space than one of the Compupro boxes, and in fact is smaller than the Televideo 925 terminal that came with the Sage.

The Sage can be that small in part because it uses what's known as a switching power supply rather than the brute-force transformer, rectifier, and filter system in the Compupro. Switching power supplies rectify the 110-volt AC immediately, then they use electronic switching to eliminate the bulky low-frequency transformers of conventional power supplies. They are a lot more efficient than the old-fashioned kind; they're also trickier to design and use.

While the Sage is really lovely hardware, there is a small problem: the operating system is UCSD Pascal.

For many that's not a bug, it's a feature. Heaven knows, UCSD Pascal has its champions, including my friend Carl Helmers, the founding editor of BYTE. The UCSD system (now marketed by Softech Microsystems) is a completely integrated

www.americanradiohistory.com

NEW LOW PRICES!
Call toll free 1-800-828-6543
In N.Y. State call collect (716) 475-1417

The CHAT.

A price/performance leader.

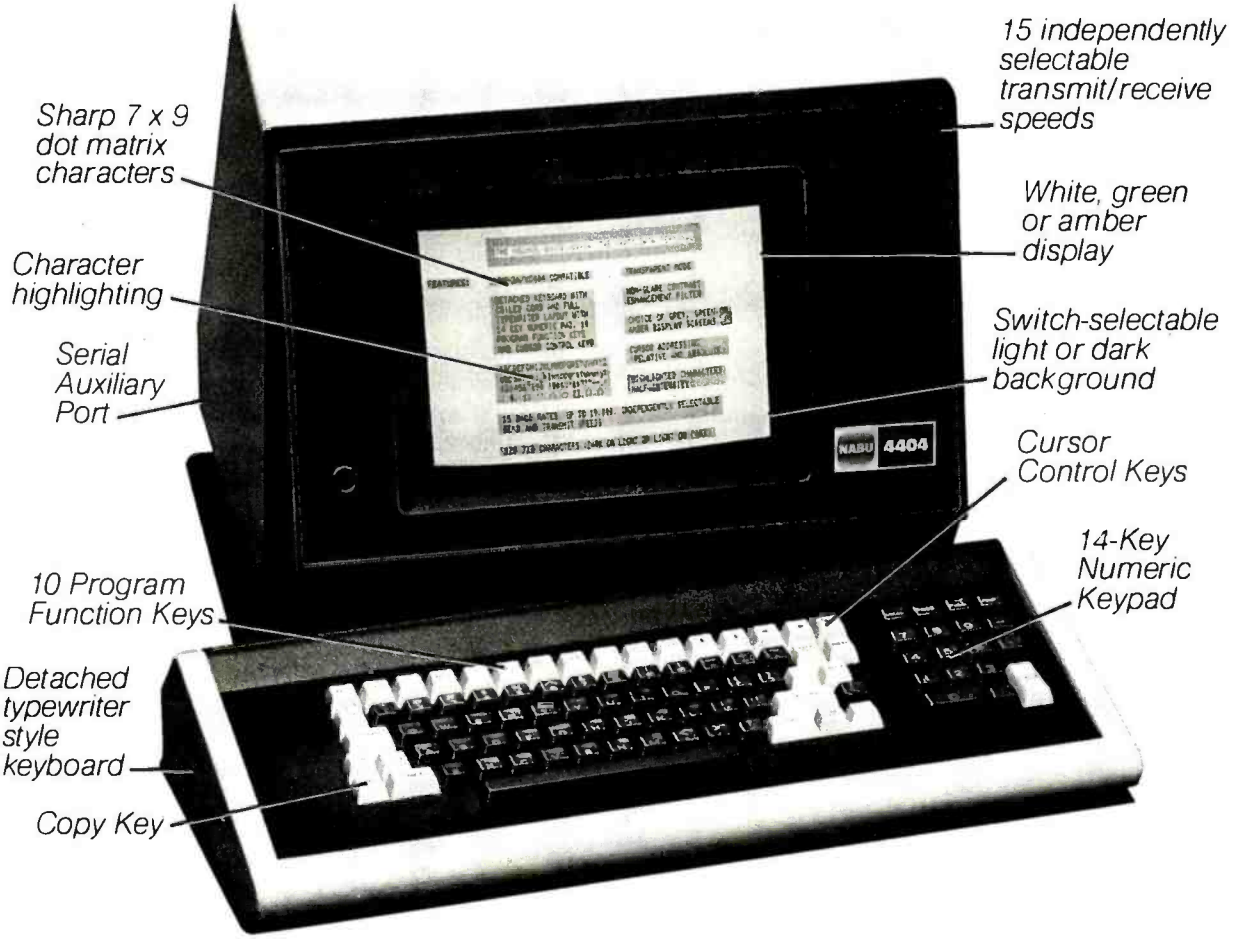

The CHAT. The NABU terminal that allows you to expand your system economically without sacrificing quality or performance.

Features include switch-selectable Volker-Craig VC404 and Lear Siegler ADM-3A compatibility, 12" non-glare screen, character highlighting, detached keyboard with 4-ft. coiled cord, cursor control keys, 10 program function keys, a bi-directional serial port, and a 16-key numeric keypad... all standard!

All these features and more...and a truly economical price tag.

Get complete information today, and discover why the CHAT is the terminal that should cost more.

ADM-3A is a registered trademark of Lear Siegler Inc.

NABU
COMMERCIAL TERMINALS
(Formerly Volker Craig)

New York
333 Metro Park
Rochester, N.Y.
14623
Telephone
(716) 475-1221

California
Telephone
(213) 385-7239

Distributor Headquarters:

California
Allen Edwards Associates
(213) 328-9770

Florida
Amerisoft Business Sys.
(305) 442-8197

Illinois
Bexdata Ltd
(312) 895-3010

Kentucky
Bolton & Westmeyer
(606) 331-9628

Massachusetts
Marketechs, Inc.
(617) 237-4343

Minnesota
Bexdata Ltd.,
(612) 835-5220
Molenaar, Inc.
(612) 235-3000

New York City
Pro-Comp Systems
(212) 246-0074

Upstate NY
Data-Term
(716) 381-7385

Ohio
Comtel Instruments
(216) 442-8080

Oregon
Data Devices
(503) 641-5500

Utah
Raytel, Inc.
(801) 295-3963

Virginia, Washington DC
Computerware, Inc.
(703) 821-8220

Circle 301 on inquiry card.

www.americanradiohistory.com

package containing the Pascal compiler, a text editor, disk-file system, and a bunch of utilities to format and copy disks and such like. One nice feature of the system is that when you try to compile a Pascal program, as the compiler finds your errors, it shows them to you in the editor; you can fix them on the spot and go on, or wait to see more. This takes a lot of the sting out of Pascal.

The system is *fast*, too. It compiles Pascal programs with lightning speed. The programs are compiled to the UCSD Pascal p-code, which is an intermediate code that must be interpreted at run-time. It is not machine code, but the 68000 chip is so fast that this turns out not to be a handicap either.

My 20 by 20 matrix benchmark program (see the October 1982 BYTE) ran in 8.9 seconds on the Sage; the best time on the 8085/8088 dual processor was 19.2 seconds when compiled by Pascal MT+ (which compiles to *machine* language).

That's fast.

The other drawback to the Sage is that the documents assume you know more than I do. Not a *lot* more; just more. Fortunately, there's a brief cookbook example of how to make copies of disks; I was able to back up the Sage operating system before trying to experiment, which is just as well. However, after that admirable step-by-step tutorial on formatting and duplicating disks, the documents lapse off into "documentese," with few to no examples and a nonlogical order of presentation.

Rod Coleman tells me that by the time you read this the Sage will probably have other operating systems, including some kind of CP/M. I hope so. Meanwhile, you can get from Softech a program called Xenofile that will translate CP/M text files into the UCSD format, so you can salvage ASCII (American National Standard Code for Information Interchange) files from your CP/M system for use on the Sage if you like. Probably the most useful thing you can bring over would be Pascal *source* programs.

Last-minute addition: if you get a Sage, get *Introduction to the UCSD p-System* by Charles W. Grant and Jon Butah. Published by Sybex, it contains a really detailed tutorial introduction. I wish I'd had the book when I first got the Sage; it would have saved a *lot* of time. Given that book, you can get a fairly good understanding of the UCSD system in a reasonable time. You may not *like* the system, but at least you'll know how to use it. Flash: the Grant and Butah book now comes standard with the Sage computer.

We've sent the Sage off to a mad programmer associate of Alex's; he's putting it through strenuous tests, as well as writing considerable software for it. Much more on the Sage in later columns.

Alas, Poor Ezekial

We sent Ezekial, my old friend who happened to be a Cromemco Z-2, off to the organ banks; he has officially become spare parts for Larry Niven's machine. Like the wonderful one-horse shay, everything went at once. The final problem was the disk system. Zeke used old iCOM disks, the kind that had Percom drives with the controller on two boards in the box with the drives and their power supply; and they became unreliable. Spare parts are unobtainable: although those drives were the very best available when we got them, they're now from the Dark Ages. To update them would cost more than new Compupros, and they'd still be slow with very limited storage.

Zeke's bus is too slow, and his old Industrial Micro Systems memory uses too much power. The bottom line, alas, is that it just wasn't worth fixing him up. Nor Singh swears he's going to get him running so that I can donate him to the Los Angeles Science Fantasy Society. The LASFS already owns Altair, the first Niven machine. (That's a little embarrassing, because Altair Niven was officially accepted as a *member* of the club.)

There's another possibility. Dan MacLean's widow donated Alice, Dan's old IMSAI, to the LASFS, and Nor Singh has been hired to get Alice running for the club; it may be that

apple
Dist. by Bell & Howell
800 368-3417

$999

APPLE PARTS

DISK II & CONTROLLER	450
QUENTIN DRIVES	299
PREMIUM PACK	499
BMC MONITOR	91
AMDEK RGB COLOR II	749
HAYS APPLE MODEM	289
PASCAL	199
VISICALC	189
LOGO	99
MASTER TYPE	28
WIZARDRY	38
48K LOOK ALIKE SYSTEM DISK & CONTROLLER	1075

PRINTERS

NEC 3510	1399
NEC 7710	2338
DIABLO 630	1799
STARWRITER F10	1550
MICROWRITER	685
OKIDATA 82A	439
OKIDATA 83A	689
STROBE PLOTTER	699
IDS MICROPRISM	498
COEX	350
FX-80	Call

MODEMS

HAYES 1200 BAUD	549
CAT 1200 212A	588

IN STORE ONLY

The Fabulous EPSON QX-10 AND HX-20 COMPUTERS

SYSTEMS

ZORBA	1995
KAY PRO II	Ask
KAY PRO 10	Ask
ACE 1000	Ask
ACE 1200	Ask

THE Computer Learning Tree



Government Sales
Call 703-750-2632

7023 Little River Tnpk.
Annandale, VA 22003

Circle 103 on Inquiry card.

www.americanradiohistory.com

Zeke and Alice (who shamelessly carried on a long-distance affair for years) may yet be united into a single working entity . . .

Zeke II

Ezekial has departed, but I have consolation: as Nor Singh arrived to remove Zeke, Tony Pietsch delivered Zeke II, which is a state-of-the-art writing machine. That, of course, is the point of all this. I get lots of letters asking my recommendation for "the ideal word processor." My answer usually is, "That depends." However, I've seen nothing better than Zeke II for creative writing.

First: my "ideal" writing system is a computer, not a dedicated word processor. True, some excellent dedicated word processors are on the market, and it's a lot easier to learn to use them than it is to learn to write with a full microcomputer. However, in my judgment, the saving is illusory: it doesn't take *that* much longer to learn to use a real computer; and then you can tap the power of the software explosion. Most dedicated word processors leave you at the mercy of one company: you get only the software it thinks you should have. Consequently, I recommend CP/M systems.

Second, iron is expensive but silicon is cheap: new computer boards are invented all the time. Get a good S-100 bus system and you can take advantage of the dozens—perhaps hundreds—of firms developing new capabilities for it.

Third, deal with reliable companies with a good track record.

In keeping with these views, Zeke II consists of a Compupro S-100 bus and power supply. My friend Bill Grieb continues to swear by the Integrand box that has bus, power supply, disk power supply, and disk drives all built into a handsome wood-grain cabinet—and perhaps he's right. I can only say that the Compupro box has never disappointed me. It's built like a Mack truck, with .2 *farads* (none of this microfarad stuff!) of power filtration. The only disadvantage is that it's *big*, but I don't mind that. The large size helps keep the components cool.

Inside the box is a Compupro 6-MHz Z80 central processing unit, 64K bytes of memory (Compupro RAM-17), an Interfacer 4, and the Compupro Disk-1 disk controller. That drives a pair of Compupro 8-inch double-sided double-density drives at 1.2 megabytes per disk. The Interfacer 4 plus the new CBIOS (customized basic input/output system—the thing that tells CP/M about your particular hardware) written by Tony Pietsch allows a number of ways to talk to the system. Tony's CBIOS is now available from Compupro.

The CBIOS allows you to use either 5¼- or 8-inch disks. The Compupro controller supports either. It does not run both at once; if you want both on the same system, you will need two different controllers. That, however, is no problem: the Compupro box and CBIOS can handle the situation, so that you can transfer files from 8-inch to 5¼-inch and vice versa.

Some disk controllers will run both

FRANCHISE OPPORTUNITIES.

IT'S NEVER BEEN A BETTER TIME!

The computer industry is experiencing a spectacular growth, by 1990 it will become a 20 billion dollar industry. Computer retailing was one of the few industries **not** *seriously effected by the recent economic crisis.*

Now . . . is a good time to consider a franchise opportunity with MicroAge, a leader in computer retailing. MicroAge has a proven "track record" with over thirty franchised stores throughout the United States and Canada. In an industry where experience is crucial, MicroAge has it, with six years computer retail experience and three years in franchising. It's just good sense to go with a leader.

If you're committed to success in computer retailing, it's essential you evaluate the MICROAGE COMPUTER STORES *Franchise opportunity. Investment:* $130,000-$200,000.

For detailed information about MicroAge "Franchise Opportunities," call **(602) 968-3168** *or write to:*

MicroAge Computer Stores Inc.
1425 W. 12th Place
Tempe, AZ 85281

MicroAge COMPUTER STORE
"The Solution Store"™

www.americanradiohistory.com

8- and 5¼-inch disk drives; I once asked Bill Godbout why his wouldn't.

"I don't make Muntz TVs, either," he told me.

Interpreted that means that it's tricky enough running at the speeds his direct-memory-access (I'll explain DMA below) systems use without trying to play games. Bill Godbout once told me, "If the error rate is measurable, it's too high." His stuff is designed to that philosophy.

I still prefer 8-inch disk drives, although not as adamantly as I did last year. The 5¼-inch systems are getting more reliable, and running double sided and double density they hold quite a bit of information. I do not believe the small disks are as reliable as the 8-inch, but many people for whom I have respect say they're reliable enough, so my preference is probably pure prejudice; unfortunate, but there it is.

I can also hang a normal terminal on the system, and indeed the same Televideo 950 that drives the Compupro 8085/8088 dual processor can run Zeke II. That, however, is not the normal mode, because we've set up Zeke II mostly as a writing machine. When he's powered up, he comes up in WRITE, my text editor; and when he's in WRITE mode, he talks to me through an Ithaca IA-1100 memory-mapped video board. (Memory-mapped video displays directly what's in a segment of memory; I tried to explain it in the November 1982 BYTE.)

Tony has modified the Ithaca board to be "write-only memory"; that is, you can't read the board's memory, you see only what's displayed on the monitor screen. The board is addressed to the top 1K bytes of memory, and thus overlaps the RAM-17, but they can't interfere with each other.

We took the video chips out of Ezekial and put them in the Ithaca board, so that the display on my big Hitachi 15-inch screen is identical to the old Zeke. I continue to use 16 lines of 64 characters to avoid eyestrain. Also, I'm used to it: after all, a standard manuscript has 60-character lines. A page is usually 25 or 26 lines, so I don't see a whole page at once; but I've noticed an unexpected benefit. Having only 16 lines on a screen tends to make me shorten my (usually too long) paragraphs.

We wanted to put in a 24 by 80 "write-only memory" board, but we couldn't find one that would work at 6 MHz and had a nice (i.e., stable, legible, etc.) display; if anyone knows of such a beast for the S-100 system, I'd appreciate the information.

Another really nice thing about Zeke II is the keyboard, which comes from an Archive computer. The Archive, incidentally, is the machine Dr. Arthur C. Clarke settled on. His is named Archie. He got an Archive in part because he could get service for it in Sri Lanka. I'm sure, though, that he fell in love with the keyboard, and if I had to buy an Archive to get this keyboard I probably would. As it happens, Tony was able to obtain three or four of them.

The Archive has great key feel, a good nonelectronic "click," and a really nice (Selectric-style) key

EXPOTEK
2723 W. Windrose Suite 3
Phoenix, Arizona 85029
1-800-528-8960

OKIDATA

All Prices Subject To Change

COMPUTERS

ATARI
1200 – $645 800-48K – $499
410 – $77 810 – $429
830 – $155 850 – $159

ALTOS
5-15D – $2120 5-5D – $4100

NORTHSTAR
Advantage–$2600 Horizon 64QD–$2600

TELEVIDEO
802 – $2599 802H – $4450
806 – $4950 800A – $1250

APPLE-LOOK-A-LIKE
CALL

APPLE CARDS
16K RAM – $78 Z80 CARD – $245
Videx Card – $227 Smart Term – $279
Microsoft Prem. Pk – $489

SOFTWARE
Apple All Major Brands – $CALL
Wordstar – $299 Datastar – $180
Calcstar – $100 Spellstar – $165

DISK DRIVE
Microsci Apple Dr. – $300
Rana Elite I – $300
IRana Elite II – $450
Rana Elite III – $550

MODEMS
HAYS – MICROMODEM – $285
HAYS – SMARTMODEM – $210
HAYS – 1200 Baud – $530

DISKETTES/BOXES
Elephant – $20 Scotch – $25 Dysan – $35

PRINTERS

OKIDATA
M80 – $305 M83A – $639
M82A – $399 w/Tractor & Grap. $479
M84P – $978 M84S – $CALL

ANADEX
9500A – $1290 9501A – $1290

CITOH
F-10P – $1370 F-10S – $1375
1550P – $659 Prowriter 1550CD – $709
8510AP – $459 8510ACD – $550

DATASOUTH
DS120 – $595 DS180 – $1175

DIABLO
630RD – $1945 620 – $900

NEC
8023 – $450 7710 – $2099
3510 – $1499 3550 – $1925

TI
810 – $1240 820 – $1795

TERMINALS

ADDS
A1 – $485 Viewpoint A3 – $510

HAZELTINE
1500 – $995 ESPRIT – $498

TELEVIDEO
910 – $569 925 – $718
920 – $735 950 – $899

ZENITH
Z19 – $689 Z89 – $2129

MONITORS
Amdek 300 – $140 Color I – $300
Amdek Color II – $645 Color III – $385
BMC Green – $85 USI Amber – $159

COMPUTER IC'S COMPLETE LINE
SPECIAL 4164 (150ns) $9.50ea.

GUARANTEED LOW PRICES

Customer Service
602-863-0759

Circle 180 on Inquiry card.

www.americanradiohistory.com

COMPU-CART®

SECURELY TOGETHER **ERGONOMICALLY DESIGNED**

PAT. PEND.

If you have an I.B.M. computer from their largest 308I to their smallest Personal Computer, we have the right workstation for you. The Compucart is the first ergonomically designed, fully lockable, mobile computer/terminal workstation.

The Compucart's ERGONOMIC design means that not only is the keyboard at the correct height for comfortable interactive entry, but it is adjustable both horizontally (back and forth) and vertically to accommodate both the user and the hardware. The design further means that the keyboard, the work and the screen are all in your comfortable LINE OF SIGHT. The Compucart is engineered to minimize fatigue and to improve the user-computer interface.

ONLY the Compucart offers SECURITY by returning the computer to the closed position when not in use or running unattended, the double walled tambor door is closed and the whole workstation is secured with one lock. For a terminal user it means that you can comfortably step away from your desk while you are logged on and access to your terminal is restricted.

The Compucart is mobile to allow multiple users to take full advantage of the multifunction features of modern computers and NETWORKS. Mobility also means BACKUP for a terminal or workstation that is down.

The Compucart, even with all its features, requires minimum floor space (about 4 sq. ft.) and is the engineered workstation that suits both you and the hardware to conserve the human resource and keep your **HARDWARE and SOFTWARE...SECURELY TOGETHER FOR YOU!**

COMPU-CART

201 North Rome Ave. P.O. Box 2095 Tampa, FL 33601-2095
Ph. (813) 251-2431 (in Florida) Call Toll Free 1-800/237-9024

Circle 91 on Inquiry card.

www.americanradiohistory.com

layout. The entire ASCII character set is on board along with arrows on the left side and a numeric key pad on the right.

There aren't any extraneous keys in odd places; and a lot of special-purpose keys are put up where you can get at them without their being in the way. The special-purpose keys are really nice in that they make characters with the eighth bit set, so that we can make use of not only the entire range of control characters, but also more than a dozen additional one-stroke commands.

The Archive comes with a printed strip that translates the special-function keys into Wordstar commands, and I suppose the Archive machine itself takes advantage of those. Because I don't use Wordstar, I had some work to do. Figuring out how to make good use of those keys was instructive; more below.

The bottom line is that callous as it may seem, I don't really miss Zeke. This new keyboard is fast and convenient, and the Compupro disk drives are so much faster than the old iCOMs that I find myself saving my text far more often. Scrolling is smooth and lightning quick.

I do hope that Nor Singh can make Zeke work again; he's still better than half the junk I see out on the market, and it would be nice if others could get some good from him. Meanwhile, Zeke II is as close to being the "ideal" writing machine as I've ever worked with.

There are a few possible improvements. For one, there's no hard disk; but that's merely a matter of time. Tony has one and is refurbishing the software right now. A hard disk isn't strictly necessary anyway; with a DMA disk controller and double-density disks, saving your text doesn't take very long; and for a writing machine, safety is the number one goal, meaning that you want the machine to make it easy to save early and often. (That's one major advantage of the MIT EMACS full-screen editor and its descendants: it can be set to automagically save text even if you don't think of it.)

DMA and high density speed up floppy-disk operations something wonderful. Direct memory access is literally just that: the disk controller has an on-board microprocessor that can get at your system's memory without going through the regular processor; that lets it do a faster job of getting stuff from memory and putting it on disk or vice versa.

Whether or not there's a hard disk, the ideal writing machine will need fast and reliable floppies. I don't feel really safe until my text is saved on a disk and the disk has been removed from the machine.

What do you do if you have several serial output devices but only one RS-232C output port? Enter the T-Switch.

A second limitation to Zeke II is there's no RAM disk, i.e., memory that's set up like a disk for fast access. RAM disks are nice for checking spelling (as well as compiling and other computer operations). Of course, if you have a hard disk you might not want a RAM disk too.

I do have Semidisk on my dual-processor machine, and that would work fine in Zeke II; but Compupro has announced that it's coming out with an M-Drive that will work with the Z80, and since almost everything else in Zeke II is Compupro, I thought I'd wait for Compupro's system. More on M-Drive and Semidisk below.

Finally, the Z80 makes for a vanilla system; more advanced stuff is available. We have here an experimental board from Compupro that runs at 12 MHz. That's *fast!* However, for a writing machine you don't really need that much speed, and the Z80 chip has been around long enough to have a track record. Zeke II is as near the state of the art as I'd now recommend for a system devoted mostly to text handling.

Terminal Switching

For a while it looked as if I'd be up to my clavicle in keyboards. Although it's possible to make Zeke II run with the 16 by 64 screen as his normal console (as well as when he's running the text editor), there are good reasons to want a 24 by 80 screen when you do programming. At the same time, I have the Televideo 950 nearby because that machine does nearly all our development work and is also useful for checking spelling and the like.

I sure didn't want a second terminal for Zeke II, so I solved the problem with a T-Switch from Inmac. I suppose that requires a bit of explanation.

Computers talk to the outside world in two basic ways: serial and parallel.

Parallel communication sends all the data bits of a single character at the same time. Parallel communication is inherently faster than serial; but it requires many wires (in an 8-bit machine at least 10 and generally many more). Parallel, which is often electrically noisy, is usually more subject to errors induced by stray radio noise.

As an example, MacLean used parallel ports to connect his keyboard to Alice the IMSAI, and when he began he used a flat ribbon cable. He got a lot of extraneous garbage into his computer. Eventually he converted to a round shielded cable and *most* of the errors vanished.

Centronics printers and other such devices generally use parallel communication. The distance they can be from the computer is limited—15 feet maximum.

With serial communication the bits are sent one after another; an 8-bit character thus takes at least 10 times as long to send in serial as it would in parallel. (That's not strictly true, but we'll ignore the fine details.)

Your computer has I/O (input/output) ports built in as part of its basic structure. Those ports are parallel ports; it takes special hardware to convert from parallel to serial. Serial signals can be sent farther, however, with less noise and interference. Most letter-quality printers, like the Diablo, and all telephone or modem communications use the serial method.

www.americanradiohistory.com

Check The Chart Before You Choose Your New 16-Bit Computer System.

Columbia Data Products' New Multi-Personal® Computer, Featuring IBM-PC® Compatibility, Excels In Professional, Business And Industrial Applications. Check it out.

Columbia Data Products' MULTI-PERSONAL® COMPUTER can use software and hardware originally intended for the IBM® Personal Computer . . . while enjoying the flexibility and expandability of all Columbia Data's computer systems.

Available operating system software includes single-user MS-DOS® or CP/M 86® or multi-user, multi-tasking MP/M 86® or OASIS-16®, with XENIX® available soon, providing users with a host of compatible software packages for personal and professional business and industrial applications. A large selection of higher level languages are also available, including BASIC, FORTRAN, COBOL, PASCAL and MACRO Assembler.

Our standard 16-Bit 8088 hardware configuration provides 128K RAM with parity, two RS-232 serial ports, Centronics parallel printer port, interrupt and DMA controllers, dual floppy disks with 640K storage, Winchester disk and keyboard interfaces, and eight IBM-PC compatible expansion slots . . . and lists for only $2995. Winchester hard disk configurations, featuring cache buffer controllers for enhanced disk access performance are also available, starting at $4995.

So, when you need to grow, why gamble and hassle with independent third party hardware and operating system vendors which may or may not be compatible . . . not to mention the hidden expense and frustration of implementing peripheral drivers in the different operating systems and upgrades? Who needs the finger-pointing when things don't work out?

After you review our chart, you will agree . . . for overall 16-Bit microprocessor superiority, expandability, flexibility, compatibility, and real economy, Columbia Data is your *total source*.

Our Multi-Personal Computer . . . the 16-Bit system born to grow!

Get yours now.

Circle 82 on Inquiry card.

MAIN FEATURES	CDP-MPC	IBM-PC*	OTHERS
Microprocessor	16-Bit 8088 8-Bit Z-80 (Opt)	16-Bit 8088	?
USER Memory	128K-1 Mbytes	16K-256 Kbytes	?
IBM-PC Compatible Expansions Slots Beyond Professional Configuration[1]	8 Slots	0	?
Resident Floppy Disk Storage	Dual 320K (std)	Dual 160K (Opt) Dual 320K (Opt)	?
Resident Cache Buffer Hard Disk Storage	5M/10M	—	?
OPTIONAL OPERATING SYSTEMS (Supported by Company)[2]			
MS-DOS (PC-DOS)	Yes	Yes	?
CP/M 86	Yes	Yes	?
MP/M 86	Yes	—	?
OASIS-16	Yes	—	?
XENIX	Soon	—	?
OPTIONAL HARDWARE EXPANSION BOARD (Supported by Company)			
RS-232 Communications	Yes	Yes	?
B/W and Color Display Controller	Yes	Yes	?
Expansion Memory	Yes	Yes	?
Z-80 CP/M-80 Board	Yes	—	?
Cache Buffer Hard Disk	Yes	—	?
Time/Calendar Board	Yes	—	?
IEEE Bus Controller	Yes	—	?
8" Floppy Disk System	Yes	—	?
8" Hard Disk System	Up to 40 Mbytes	—	?
Tape Cartridge System	Yes	—	?

[1]For comparison purposes, typical professional configurations consist of 16-Bit 8088 Processor, 128K RAM with Parity, Dual 320K 5-inch Floppies, DMA and Interrupt Controller, Dual RS-232 Serial Ports, Centronics Parallel Port and Dumb Computer Terminal or Equivalent

[2]Columbia Data Products also supports CP/M 80* with an optionally available Z-80 CP/M Expansion Board

*As advertised in BYTE Magazine, August 1982

COLUMBIA
DATA PRODUCTS, INC.

Home Office:
8990 Route 108
Columbia, MD 21045
Telephone 301-992-3400
TWX 710-862-1891

West Coast:
3901 MacArthur Blvd.
Suite 211
Newport Beach, CA 92663
Telephone 714-752-5245
Telex 277778

Europe:
P.O. Box 1118
450 Moenchengladbach 1
West Germany
Telephone 02161-33159
Telex 852452

IBM is the trademark of International Business Machines. CP/M and MP/M are trademarks of Digital Research. OASIS is the trademark of Phase One. MS-DOS and XENIX are trademarks of MICROSOFT.

www.americanradiohistory.com

There's more than one serial system, but by far the most popular in the microcomputer world is called RS-232C. In theory there's an RS-232C standard; in practice that's *almost* true but not quite. However, it's true enough for T-Switches to work.

Suppose you have several serial output devices—say a printer and a modem for communications—and only one RS-232C output port on your computer. Enter the T-Switch, which lets you connect both to the port and switch between them. Obviously only one is active at any given time. It's true you could accomplish the same result by physically plugging and unplugging cables, but that's hard on the cables as well as darned inconvenient.

I'd only seen the T-Switch in advertisements, but it seemed a good idea; meanwhile, Inmac sent me a catalog of its equipment for microcomputers. I've ordered stuff from Inmac before; although its equipment is high-priced, its service is speedy and reliable. Anyway, I bought a T-Switch, and the result is that the Televideo 950 can run both Zeke II and the dual-processor machine. Actually, things are better than that: Tony has ingeniously set up the BIOS so that even after exiting from WRITE the Archive keyboard is active. Therefore, I can run Zeke II on the Televideo 950 terminal but continue to type on my splendid Archive board.

I love it.

Changing the CBIOS

The CP/M operating system has to be told about your hardware. That's done through a beast known as the CBIOS. CP/M, as modified by the CBIOS, resides on tracks 0 and 1 of your floppy disk and is read in when the system is powered up. This is known as "cold booting" the system. Once CP/M is in memory, it can read in other files.

In the early days you couldn't do many fancy tricks with the CP/M CBIOS because there just wasn't room for a big program on two disk tracks. Now, however, with double-sided double-density disk systems, there's acres of space, and, if you have the source code to your CBIOS, there are all kinds of nifty things you might want to do. Tony does a lot of them in the CBIOS he put together for the Compupro systems.

In my case, I wanted to make use of those special keys on the Archive keyboard.

The usual microcomputer accepts only 7-bit characters from the keyboard. This is no problem because few keyboards can do anything with the eighth bit. As a practical matter, then, we are limited to 128 (2^7) unique characters in our communications with machines. Of these, the first 31, plus character 127 (delete), are reserved as "control" characters. These include Control-H, which is backspace; Control-M, which is carriage return; and others, as well as the less familiar ones like Control-backslash.

Most microcomputers do not display control characters; they've been programmed to treat them as orders to be executed rather than something to show to the operator. Thus, character 7, Control-G, rings the bell, but it doesn't print anything.

Some programs, particularly text editors for word processing, have a lot of commands. You might want to move the cursor around; jump to the end of the text; save the text; display helpful information; delete words, lines, and characters; and such like. The problem, then, is how to communicate your wishes to the computer.

If you want to be really elegant about it, you can put extra keys on the keyboard and label them "Delete Word" or "Find" or whatever. This is fine for the first 32 commands; then what do you do? Each special key has to send *something*, and if you want to use the entire ASCII character set including curly braces and squiggle and such like, then you're stuck. After you run out of control characters, you can't have just one keystroke per command.

Various programs use different ways around this. Some go to "com-

NEW LOW PRICE! SAVE 50%

Moore Keen Edge® Continuous Stationery gives your computerized correspondence the look of individually-typed letters

■ HALF PRICE SAVINGS! Moore 20-lb. white bond Keen Edge ■ Produce letters that look individually typed on 8½ x 11" stationery—it's almost impossible to tell they're computer generated! ■ Enjoy the speed and convenience of your word processing equipment ■ Keen Edge forms separate easily with razor-sharp, clean edges ■ Don't forget to order matching 24-lb. #10 white bond continuous envelopes on regular carriers ■ **MOORE GUARANTEES YOUR 100% SATISFACTION OR YOUR MONEY BACK!**

To order, **Call toll-free 1-800-323-6230**
In Illinois, Call (312) 459-0210 · If ordering by phone, mention Dept. 104311 to obtain this offer or complete and mail the convenient Order Form below.

MOORE Catalog Group
MOORE BUSINESS CENTER
A Division of Moore Business Forms
P.O. Box 20, Wheeling, IL 60090

Please select from the chart below.

Item	Item No.	Qty. per Ctn.	Ship. Wt. per 1000	Price per 1-4 Ctn.	5+ Ctn.
Forms	M13581	2600	36.4 lbs.	$ 42.25 ea.	$ 35.75 ea.
Envelopes	M13136	1000	20.0 lbs	119.50 ea.	114.50 ea.

☐ **YES!** Send me my FREE 1983 Moore Computer Forms and Supplies Catalog!

☐ **YES!** I'd like to order. (Please complete the following:)

YOUR NAME _____ TITLE _____
COMPANY NAME _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____
( ) BUSINESS PHONE _____ COMPUTER MAKE AND MODEL _____
Dept. 104311

Total	No. of Ctns.	Price
Forms—M13581	_____	$ _____
Envelopes—M13136	_____	$ _____
	TOTAL PRICE	$ _____

Applicable sales tax must be added unless you enter your tax exempt code here._____.
Your first order will be shipped freight free.

☐ BILL ME (net 30 days). I am D & B rated

www.americanradiohistory.com

BHRT

Computers for: Business, Home Applications, Resource Management, Technology & Science

NEW: 15-Day Exchange Privilege (See "TERMS" for details)

Displayed and sold at our Showroom, 12210 Michigan Ave., Grand Terrace, CA:

MICRO-DECISION by Morrow Designs

Perfect desk-top computer:
• Z-80, 1 Floppy standard. 2nd optional. Optional terminal, or use your own. • CP/M with user friendly "shell." • WordStar, SpellChecker, SpreadSheet, Microsoft Basic-80 & BASIC. List $1195 to $1790, **Limited Quantity CALL For Availability.**

NEW: Now with double-sided double-density Floppies (800 KB storage), and with Data Base Management Software ..... **CALL For Availability!**

NEC APC

Extremely sophisticated graphics and color display (1024x1024 pixel) 16-bit (8086!), 128K standard, expandable to 256K. 1-2 8" Floppies 1 MEG each (run any CP/M program available on 8"). Detachable keyboard. Integral monitor (monochrome/color). Extensive software.

H01 Monochrome, 1 Floppy ..... List $3298
H02 Monochrome, 2 Floppies ..... List $3998
H03 Color monitor, 2 Floppies ..... List $4998

CALL for appointment

ALTOS SERIES 5

Ideal for independent business or advanced personal computer user: supports 3 users with independent tasks concurrently. Z-80, 192K, 2 Floppies 2 MEG, expandable to hard disk. Comes with MP/M II, OASIS also available.
List $2990 ..... **CALL for availability!**

3 GRAPHICS SYSTEMS:

NEC P-8800

Personal Computer System: **Just Arrived:**
All the flexibility one could ask for, in highest performance system! Z-80 standard, 8086 16-bit processor optional. ROM Basic (8/16 bit). Graphic RAM. 64 K user RAM standard, supports up to 256K. Both 5¼ and 8" floppies. Most sophisticated graphics include 3 individually-controlled windows: 640x200 pixel resolution, overall text & graphics, RGB or composite display, serial & parallel ports, cassette interface. **LIMITED SUPPLY** ..... **$CALL!**

ZENITH Z-100

Advanced color graphics under Z-BASIC, 16 bit (8088) & 8-bit (8085) 128K RAM, expandable to 768K (Expand to 192K for only $180).
Runs most IBM-PC software and CP/M.

ZF-100 128K RAM 8/16 bit, 1 floppy monochrome graphics ..... LIST $3,249 **$CALL**
ZF-110 Similar to above, but COLOR GRAPHICS, 2 floppies ..... LIST $3,999 **$CALL**
ZF-120 128K RAM, 8/16 bit, 2 floppies, monochrome graphics, integral display ..... LIST $4,099 **$CALL**
ZENITH Hard Disk ..... **$CALL**

TeleVideo 803

New, all the features of 802, PLUS: • Larger Screen: Nearly double the standard 12" video displays. Adjustable positioning standard! • High-resolution graphics under CP/M, (640 x 240 pixels) standard! • 16 programmable function keys standard! • **And the best of all:** Priced at $1000 under the 802! With all these features, the new TeleVideo computer is an outstanding buy!!! List **$2495**
$ CALL For Availability!!!

TELEVIDEO 1602GH: Similar but 10M Hard Disk. List $6995 ..... $ CALL

IBM/APPLE PRODUCTS:

HARD DISKS & MICRODISKS:

Your backup worries are over.

QCS Hard disk 6 MEG removeable + 6 MEG fixed. List $3,499 ..... ONLY $2,795
CORONA Hard disk 5 MEG, mounts internally ..... ONLY $1,536
10 MEG ..... ONLY $1,919
AMDEK 3" Micro-Floppy System, w/controller, 1 MEG total. List $899 ..... $ CALL

MEMORY & I/O BOARDS:

QUADBOARD: clock, serial & parallel ports, 128K $599
QUAD512 + 64K + serial port $369
QUAD512 + 256K + serial port $699
QUADSCREEN Super-Monitor (166 col. x 66 line) ..... $ CALL
QUADCOLOR for better color graphics ..... $ CALL

MONITORS & PLOTTERS:

AMDEK 12" Amber $159
AMDEK COLOR II RGB, hi-resolution, 13" $699
AMDEK COLOR III RGB $382
ZENITH RGB high-resolution RGB $524
PRINCETON high-resolution 12" RGB ..... $ CALL
NEC 12" RGB high resolution ..... $ CALL
TYMAC printer-adapter f/APPLE $89
GRAPPLER $129

COLUMBIA

IBM- COMPATIBLE COMPUTER:

COLUMBIA 1600 16-bit 8088, accepts all IBM boards, reads & runs all IBM software, but has also additional Z-80 processor to run 8-bit C/PM. So compatible it can even use IBM keyboard! 128K, 1 parallel & serial ports standard, 8 expansion slots! COLUMBIA 1600 package: computer as above + keyboard + CRT controller. List $3,635 ..... $ CALL

SYSCOM-2: Apple-Compatible Computer

Runs most software written for the 6502 (Apple II and the Franklin Ace). Many improvements engineered into this fine machine. Digital analog board is part of CPU rather than a separate component. High and low resolution graphics, both black and white and color, with video memory and sound, are all part of the computer. 48K, 52 keys, 16 colors. List $869 ..... $ CALL

BUSINESS OWNERS...Can You afford NOT to computerize?

If conflicting claims for different systems leave you bewildered, if a salesman is "pushing" a system about which you have doubts, or your costly computer is not delivering its promise—**help is now available.** Our Business Program divides computer acquisition to 4 phases, and provides 4 distinct services. **Use ONLY the service needed, control your cost at EVERY phase, and pay ONLY for what you get**—each of our services is available **independently:**

1) **ASSESSMENT OF NEEDS.** On time-usage basis, you obtain access to our CONSULTANTS.
2) **HARDWARE.**
3) **SOFTWARE.** ACCOUNTING PLUS, CYMA DBASE II, MULTIPLAN.
4) **SYSTEM SUPPORT.** Subscription to our SUPPORT SERVICE ($200/system/year) gives you access to our SOFTWARE SPECIALISTS who answer your questions on time-usage basis.

To Set Up Your Initial Evaluation Call Our Business Division (714) 781-6566

NOW BUY SOFTWARE WITH CONFIDENCE—price of each of the modules below includes 1 full year's subscription to our SOFTWARE SUPPORT SERVICE. You get a toll-free number for unlimited inquiries whenever a question arises:

CYMA Small Business System: fully integrated G/L, A/R, A/P, Payroll $1295
CYMA G/L, A/R, A/P, Payroll, Inventory: form together an integrated software system capable of handling the requirements of larger business. Capacity is limited only by your disk storage ..... $895/module or $2995 for all 5 modules.
CYMA Medical/Dental/Orthodontic Systems: Open account/balance forward, payment books, insurance forms, patient recall, etc. $1995/system
CYMA Construction System: includes job costing $2495
CYMA Client Writeup System: for accountants and CPA $1995
Manuals for all above programs ..... $49 ppd.

3-user Decision-1 computer by Morrow Designs: MORROW DESIGNS

Z-80 based system allocates each user his own 64 K RAM partition (other multi-user systems support only 48 K partition/user). UNIX-derived operating system also emulates CP/M for broad software compatibility. Included with system: MICRONIX Operating System, CP/M, WordStar, Spell-Checker, LogiCalc, MicroSoft BASIC-80, BAZIC, Personal Pearl Data Base. **Supports up to 15 users!** System w/ 256K RAM, 16 MByte Hard Disk, 1 5¼ Floppy (8" optional), Clock, Interrupt Controller & Centronix port. Accounting, Inventory, Data Base Management software optional. List $7395 ..... $CALL

COMPLETE TeleVideo MULTI-USER SYSTEM:

Multiple workstations with independent capabilities and tasks: 3 inventory control stations, 2 Accounting Office Stations, 1 Management station (16-bit) with graphics capability. TeleVideo TS-816 CPU with 40 MEG hard disk and **tape backup.** Complete accounting, inventory control, financial management and business graphics programs, operating under Turbo-Dos w/file & record lockout for uninterrupted multi-user service. 1 high-speed dot-matrix printer and 1 letter-quality printer, receive/auto-dial modem. Complete integration included.
List $29,395 ..... **CALL FOR INFORMATION**

SMITH-CORONA TP-1:

AT OUR PRICE, NO COMPUTER SHOULD BE WITHOUT ONE!

Daisy-wheel, letter-quality, interfaces all computers. Serial & parallel models at same low price. No less than 18 print-wheels—only $6.95 each. List $849 ..... ONLY $545!

GEMINI-10 from Star-Micronics

All the features of EPSON-FT, plus backspace, continuous underline. List $499 ..... ONLY $ CALL!!!

GEMINI-15 similar but 15" carriage. Even better buy: List $649 ..... ONLY $ CALL!!!

INTERFACES & MODEMS, ETC.

Hayes Modems:
SmartModem 300 ..... $214
SmartModem 1200 ..... $523
MicroModem II $269
MicroModem 100(S-100) $289
VENTEL RS-232 Modem $763
MICROFAZER printer buffer $139
INTERFAZER f/multi-users, up to 8 terminals & 2 printers! $239

SCOTCH DISKETTES by 3M: the very best!
5¼ ss.dd. 5 boxes min. $21/box
8" ss.dd. 5 boxes min. $27/box

EAGLE COMPUTERS

Highly rated business computer, configured as Word Processor at ½ price of dedicated w.p. (See Popular Computing 12/82). CP/M, CBASIC, SPELLBINDER w.p. & ULTRACALC included free!!!

EAGLE II Z80, 64K, 2 Floppies 780K $2349
EAGLE III same but 1 6M $3199
EAGLE IV 10M Hard Disk $4795

Software: Accounting Plus All 8 MOD only ..... $1495!!!
EAGLE 1600 ..... $ CALL

Additional dot-matrix printers:

NEC-8023A (parallel) $459
AXIOM 80 col. 30cps. graph., p $289
Okidata 82A (ser/parallel) ..... $ CALL
Okidata 83A 132 col. (s/p) $649
Okidata 84-P 200 cps. & 50 cps. correspondence mode $994
Okidata 84-S same, but serial $1099
Okidata 92, just released ..... $ CALL
Microprism draft/corresp. $529

Letter-quality printers:

NEC 3510 33cps serial $1449
NEC 3530 same, parallel $1599
NEC 7710/3055 cps. s/p $2194
DIABLO 620 25cps. ser $1094
BROTHER HR-1 ..... $794
DAISYWRITER, 16K Buffer $999
QUME NEW SPRINT II 40 cps. ..... LIST $1681 $CALL

Mannesmann-Tally MT-160 heavy duty serial or parallel, TRACTOR INCLUDED. $674

MT 160 L, similar, letter-quality $759

NEW: COD 15-Day Exchange Privilege (subject to terms below)

ORDERS & INFORMATION:

Member, Better Business Bureau

Mo.-Fri. 9:00 AM-5:30 PM PST, Sat. 12:00 AM-5:00 PM PST
1-(800) 845-5555 CA, AK, HI call (714) 783-1363
BANK REFERENCE: BARCLAYS BANK OF CALIFORNIA (213) 892-7244

AMERICAN EXPRESS, VISA, MASTERCHARGE
APO, FPO, INTERNATIONAL ORDERS ACCEPTED

BHRT INC. **P.O. Box 3791, Riverside, CA 92519**

TERMS: Prices in this ad apply to **prepaid orders only,** reflect 5% cash discount off our regular sale prices. Personal checks allow 2 weeks to clear. Fortune-1000 companies, Universities and Government only: 30-day net, based on our regular (non-cash) prices. COD based on non-cash prices and requires payment in full by Cashier's Check or Certified Check upon delivery. California residents add 6% tax. This ad supersedes all prior offers. Prices subject to change and offers may be withdrawn without priornotice. All merchandise new in original factory cartons, carry full manufacturer's warranty, and are covered by full insurance during shipping. Absolutely no return on used or damaged items. Software returnable ONLY in UNOPENED original wrapping. We now offer 15-DAY EXCHANGE PRIVILEGE, subject to 10% restocking charge on returned merchandise, and excluding special order items. Add 3% for Handling, Shipping & Insurance ($3.95 minimum).

CP/M is a registered trademark of Digital Research. Microsoft MultiPlan are trademark of Microsoft Corp. CYMA is trademark of CYMA Corp., TurboDOS is trademark of Software 2000. Z80A is registered trademark of Zilog Inc. WordStar, SpellStar, CalcStar, DataStar, MailMerge are trademark of MicroPro Company. APPLE is trademark of Apple Computer Inc.

Circle 50 on inquiry card.

www.americanradiohistory.com

OUR COMPETITORS COPY OUR ADVERTISEMENTS. . .

COLUMBIA DATA PRODUCTS, INC.

The Multi-Personal Computer

NEW! IBM PC compatible

PLEASE CALL FOR MORE INFORMATION

Completely compatible with all IBM PC software and peripheral cards.

Features: 16-bit 8088 processor, 128K RAM, dual DS/DD floppy disk drives, 8 expansion slots, centronics printer port, and two RS-232 serial ports.

NEC

PC-6000 Computer	Call for Details
PC-8001A Microcomputer(32K)	699.95
PC-8031A Dual mini disk drives	699.95
PC-8012A I/O Unit, 32K, 7 slots	449.95
32K Memory Card (for 64K)	179.95
RenTec Wedge Expansion w/32K	449.95

NEC PC-8001 Software

NEC CP/M Operating System	139.95
WordStar by MicroPro	359.95
SuperSort by MicroPro	179.95

Packages that do not require CP/M:

General Ledger	299.95
A/R, A/P, Inventory, Payroll	ea. 299.95
Report Manager	149.95
Select Word Processor	349.95

We carry more NEC compatible software.

HUNDREDS OF ITEMS IN OUR SPRING CATALOG SEND $1.00, CREDITED TO YOUR NEXT ORDER

ATARI

ATARI 800 48K Memory **$579**

Atari 400 (16K)	229.95
410 Program Recorder	79.95
810 Disk Drive	429.95
850 Interface Module	165.95
16K Ram Module	69.95
Bit 3 80 Column card for 800	269.95
Atari Symtec Lightpen	129.95

ATARI SOFTWARE

Word Processor (D)	129.95
MicroSoft BASIC (D)	69.95
Macro Assembler & Text Editor (D)	79.95
Pac-Man (cartridge)	39.95
Centipede (cartridge)	39.95
Missile Command (cartridge)	32.95
Star Raiders (cartridge)	39.95
Space Invaders (cartridge)	32.95
Caverns of Mars (disk)	39.95
Assembler/Editor (cartridge)	55.95

We carry much more software for ATARI.

MODEMS

ANCHOR AUTOMATION, INC

Signalman I (RS-232)	89.95
Signalman II (Atari)	89.95

Hayes

Smartmodem II 300 baud	219.95
Smartmodem II 1200 baud	519.95
Chronograph	189.95

Novation

Novation D-Cat direct connect	179.95
Cat acoustic modem	149.95

IBM PC COMPATIBLE HARDWARE

COMPLETE SYSTEMS AVAILABLE

System includes: keyboard, monochrome display, dual SD/DD (1 megabyte), disk drives,) 64K RAM, parallel printer adapter and DOS 1.2 & manual.

Call for Price and Availability

IBM Peripherals

Apparat Combo Card w/cable	209.95
Symtec Hi-Res lightpen	139.95
Davong Hard Disk Drives	CALL

AST

Combo Plus 64K with on-board Serial, Parallel and Clock/Calendar 499.95
64K Memory Upgrade Chip set 95.95

MICROSOFT

64K Card 249.95
Add 95.00 for each additional 64K RAM.

QUADRAM

Quadboards with Sarial and Parallel ports, clock/calendar, and money in 64K, 128K, 192K & 256K configurations.
64K Board 449.95
Please call for other configurations.

ADD-ON DISK DRIVES

Tandon TM-100-2 Add-on Drive	275.95
Percom Add-on Single Sided Drive	299.95
Percom Add-on Double Sided Drive	429.95

VISICORP **New!**

VISIWORD WORD PROCESSING	VISICALC EXTENDED VERSION
299.95	299.95

commodore

COMMODORE 64 and VIC 20 PERIPHERALS

VIC 1541 Disk Drive	329.95
Datasette Program Recorder	65.95
Joystick Controller	9.95
VIC 1525 Graphic Printer	319.95
VIC Super Expander	54.95
8K RAM Cartridge	55.95
16K RAM Cartridge	97.95
VIC RS-232C Terminal Interface	49.95
VIC Modem	95.95

PLEASE CALL FOR DETAILS AND PRICES ON COMMODORE 64 EQUIPMENT & ACCESSORIES

Software Available Now:

Mailing List System (T)	20.95
Word (Text) Processor	35.95
Time Management (T)	25.95
EasyCalc (D)	99.95
EasyPlot (D)	79.95
Easy Finance (D)	49.95
Pet Emulator (D)	29.95
Sprite Editor (T)	17.95
SpriteWriter (T)	19.95
Sprite Writer (D)	24.95
MusicMagic (D)	24.95
Music Magic (T)	19.95
Wordprocessing for CBM 64 (C)	99.95
Pakacuda (T)	19.95
Sprite Master (T)	35.95
Sprite Master (D)	35.95
Sprite Maker (T)	34.95
Totl. Text 2.6 (T)	35.95
Research Assistant (T)	25.95
Business Pak (A/R, A/P, G/L)	489.95
Accounts Receivable/Billing	189.95
Accounts Payable/Checkwriting	189.95
General Ledger, Ver. 5	189.95
64 Yahtzee (T)	20.95
64 Finance (T)	20.95

DISKETTES

Verbatim 5¼ SS/DD	10/35.95	100/299.95
Scotch 3M 5¼ SS/DD	10/32.95	100/250.95
Verbatim 5¼ DS/DD	10/42.95	100/400.95
Scotch 3M 5¼ DS/DD	10/48.95	100/380.95
National 5¼ SS/DD	10/27.95	100/239.95
National 5¼ DS/DD	10/37.95	100/325.95

PRINTERS

Anadex 9501	1289.95
Smith-Corona (S or P)	679.95
Pacemark 2350 350 CPS	1995.95
New! DaisyWriter Model 2000-40 CPS	1249.95

C. ITOH ELECTRONICS, INC.

F-10 55 CPS (parallel & serial)	1699.95
F-10 40 CPS (parallel)	1379.95
ProWriter 8510 10" (parallel)	459.95
ProWriter 8510 10" (serial)	519.95
ProWriter II 1550 15" (parallel)	679.95
ProWriter II 1550 15" (serial)	739.95

EPSON

NEW! LOWER PRICES

MX-80 FX Type III w/graphics	CALL
MX-100 FX Type III w/graphics	CALL

Integral Data Systems, Inc.

IDS MicroPrism (80 columns)	629.95
Prism 132 Color (all options)	1539.95

NEC

8023 Impact Dot Matrix	469.95
3510 33 CPS Sprinwriters	Please Call

OKIDATA

Okidata 82A 80 col.	399.95
Okidata 83A 132 col.	689.95
Okidata 84A 132 col.	1099.95
Full forms tractor for 82A	60.95

NEW! FEATURES LIKE THE EPSON BUT FASTER!

GEMINI PRINTERS

These printers have features identical to the EPSON line and print faster!

Gemini 10-10" 100 CPS Fric/Trac	429.95
Gemini 15-15" 100 CPS Fric/Trac	529.95

Call for more detail on the Gemini line of Epson compatible printer.

mand modes" and use ordinary letters (K for kill and such like) while in the special mode. Electric Pencil did this: one control command put you in a special disk-operations command table, another into a print command table. WRITE follows this precedent, as does Select.

Others use "escape sequences": the computer intercepts the special character Control-], called "Escape," and interprets the next thing it sees as a command.

Wordstar does *both*: that is, you go Escape, then K, and you are in a special command block. Perfect Writer and the various EMACS-like editors do the same.

One problem with all this is that as the number of commands increases they get harder to remember. Worse, though, it's distracting for creative writers, and many (including me) don't like it. Indeed, I like multistroke *text* commands (as opposed to disk and print operations) so little that I'd rather not have them than use Wordstar and its relatives. I'll admit, however, that if there were dedicated keys that accomplished the results quickly, I'd opt for more editing commands than I have at present. Obviously, then, what's needed is a way to send many more unique commands from the keyboard.

One way to do that is to have programmable keys that send sequences. The Otrona Attache computer does something like that. You can program the Televideo 950 to do it. Tony has a version of WRITE that works with the Heath/Zenith Z-19 terminal and makes use of the escape-sequence arrow and other special-function keys.

Another way is to make a keyboard that sets the eighth bit. If you could do that, you'd have up to 128 additional "control characters."

The Archive keyboard has a number of special keys that set the eighth bit. However, because CP/M wasn't designed to support 8-bit characters, the CBIOS in nearly every CP/M system resets that bit to 0 before the program ever gets a chance to see it. Tony's CBIOS was no exception, but with a difference: he left a place in the source code where you can intercept what's coming from the console and do whatever you like with it.

Now the version of WRITE that I have doesn't accept eighth-bit commands, so even if my BIOS would pass them through I couldn't use them. On the other hand, I want to use the arrows, the Home key, the Delete Word key, and such like; they're easier to remember than control characters.

The permanent solution to that problem is to change my editor so that it accepts eighth-bit characters; that's being done. Meanwhile, a temporary solution is to intercept those special characters and interpret them. That is: the normal command to move the cursor up in WRITE is Control-W. The up-arrow key on the Archive keyboard makes the equivalent of Control-K but with the eighth bit set (decimal 139, or hexadecimal 8B). I need something that sees that hexadecimal 8B, intercepts it, and sends character number 23 (hexadecimal 17), which is Control-W, to the text editor. That will cause the editor to lift the cursor one line when I hit the up-arrow key.

www.americanradiohistory.com

BUT THEY DON'T MATCH OUR PRICES AND SERVICES.

APPLE and IBM SOFTWARE

	APPLE II	IBM PC
dBASE II DBMS	449.95	449.95
EasyWriter II	199.95	259.95
SORCIM SuperCalc	229.95	229.95

MicroPro

WordStar	359.95	359.95
MailMerge	179.95	179.95
SpellStar	179.95	179.95
SuperSort	179.95	179.95

NEW! Thesaurus for use with WordStar: 60,000 words indexed by the 4500 most commonly used words (Apple/IBM) 149.95
Peachtree Accounting Packages CALL

VisiCalc	179.95	179.95
VisiCalc (256K version)	N/A	179.95
Extended Version	N/A	299.95
VisiTrend/Plot	229.95	229.95
Visifile	189.95	219.95
VisiTerm	79.95	79.95
VisiDex	189.95	189.95

MONITORS

Amdek Video 300 12" Hi-Res Green 159.95
Amdek Color I 13" Color w/audio 319.95
Amdek Color II Hi-Res RGB 699.95
Amdek Color III economical RGB 429.95
Amdek Color IV 13" Hi-Res RGB Color 959.95
Comrex Amber Monitors
CR-5500 Amber Phosphor Monitor 199.95
CR 6500 Hi-Res 13" Color 329.95
Electrohome Monitors
13" Med-Res Color RGB 369.95
13" Hi-Res RGB Color 669.95
USI 12" Amber Monitor 189.95
USI 12" Green Monitor 179.95
Zenith 12" Green Monitor 119.95

NEC

NEC Hi-Res 12" Green Monitor 159.95
NEC Composite Color 12" 329.95
NEC (JB 1202) RGB Monitor 749.95
NEC (JB 1203) IBM compatible RGB 766.95

SANYO

Sanyo 9" Green Monitor 149.95
Sanyo 12" Hi-Res Green 199.95
Sanyo 13" Color Monitor with sound 359.95
Sanyo 13" Hi-Res RGB Color 795.00

TAXAN Affordable RGB monitors

Vision I 12" RGB 380 lines 359.95
Vision II 12" RGB 510 lines 499.95
Vision III 12" RGB 630 lines 599.95

APPLE II and FRANKLIN COMPATIBLE HARDWARE AND SOFTWARE

MICROSOFT

MICROSOFT SOFTCARD PREMIUM SYSTEM (Includes: Z-80 SoftCard, 16K RamCard, Videx Videoterm, Softswitch, & CP/M User Guide by Osbourne) List 755.00 Special Package Pricing — Only 549.00

Z-80 SoftCard CP/M by MicroSoft 249.95
16K RamCard by Microsoft & SOURCE 89.95

Videx

Videx VideoTerm 80 Column Card 239.95
Videx Keyboard Enhancer II 125.00
Utility for 80 Column VisiCalc 49.95

Hayes

Hayes Micromodem II 279.95
Hayes Micromodem II w/terminal pkg 329.95

Mountain Computer INCORPORATED

CPS MultiFunction Card 169.95
Music Synthesizer System 299.95
A/D + D/A 16 Chn Interface 259.95
RomPlus+ 129.95 RomWriter 149.95
Expan. Chassis 539.95 Clock/Cal 229.95

OTHER POPULAR ACCESSORIES

ALF 9 Voice Music Card 169.95
CCS7710A Asynch. Serial Card 139.95
Grappler I/F (Specify Printer) 139.95
Lazer LowerCase Plus III 45.00
M&R 80 Column Video Card 259.95
Novation Apple Cat II 1200 baud 289.95
Practical Peripherals Buffer cards CALL
Thunderware Clock/Calendar 119.95
TG Joysticks 55.95
TG Paddles 35.00
Vista Vision 80 Column Card 249.95
Versawriter Digitizer Pad 249.95
Wizard BPO & SOB cards 149.95

16K RamBoard
ASSEMBLED & TESTED
FOR APPLE II
$49
While Supplies Last
BUILD YOUR OWN!
BARE BOARD ONLY $15.00

APPLE II COMPATIBLE DISK DRIVES

Fourth Dimension w/controller 399.95
Fourth Dimension Add-on 299.95
Rana Elite 289.95
Rana Drive Controller Card 99.95

μ-SCI

A2 with Controller 369.95
A2 Add-On 299.95
A40 with Controller 555.95
A 40 Add-On 359.95

APPLE AND FRANKLIN COMPATIBLE SOFTWARE

HowardSoft (1982) Tax Preparer 169.95
MultiPlan by MicroSoft 199.95
MicroSoft TASC Applesoft Compiler 159.95
Screenwriter II WordProcessor 119.95
PFS (Personal Filing System) 99.95
PFS: Report 89.95
DB Master by Stoneware 169.95
Landlord Property Mgt. System 399.95

We stock the Top 100 Selection of software packages for the Apple II and Franklin.

FRANKLIN

AVAILABLE WITH COLOR

Please call or write for more details and special system package prices.

THE FRANKLIN ACE 1000 FEATURES

- Apple II Compatible
- 64K RAM user memory
- Upper/Lower case w/shift lock
- Typewriter style keyboard
- Twelve key numeric pad
- Hefty 50 Watt power supply
- Built-in fan

The Franklin ACE 1000 is a professional personal computer that is hardware and software compatible with the Apple II and includes many features not found on the Apple. All programs written for the Apple II will run on the ACE 1000 without modification including those with using high and low resolution color or B&W graphics. The ACE 1000 is plug compatible with the Apple. All peripherals that operate in the Apple II will operate in the ACE 1000 without modification.

VIDEO FUN!

ColecoVision

187.50

State-of-the Art Video Game

Features unsurpassed graphic resolution, superior arcade-type games, and a remarkable expansion capability allowing the use of existing Atari and Activision cartridges.

We carry all of the Coleco Vision add-on accessories and cartridges. PLEASE CALL

MATTEL ELECTRONICS INTELLIVISION ONLY 228.50

Includes everything necessary for immediate family enjoyment. List 399.95

We carry Intellivision accessories too.

TIMEX sinclair 1000

89.95

We carry Timex (Sinclair) accessories.

NEW! SYSCOM

APPLE II PLUS COMPATIBLE 749.95

Formerly consumer computers

1st NATIONAL COMPUTER

8338 Center Drive
La Mesa, California 92041

Order Toll Free
800-854-6654
Info & Calif 619—698-8088

We accept most major credit cards, bank wires, money orders, cashiers or certified checks and personal checks (10 days to clear). For shipping, handling and insurance add 3% if pre-paid with a check and 5% if paid by credit card (min. $5.00). UPS Blue Label air service is shipped F.O.B. CA residents add 6% sales tax. Foreign orders are shipped freight collect. All equipment is new and complete with manufacturer's warranty. Send $1.00 for Catalog/Price List, credited to your next purchase. We have a customer satisfaction policy — contact us for details.

Circle 118 on inquiry card.

That can be done. The interception takes place between the keyboard and CP/M as part of the Get Console Input routine that's programmed into the CBIOS. It requires assembly-language programming, something I haven't done in a year or so, but it was all very easy: compare the incoming character with 128 (which is delete plus one); if there's a carry, meaning that the character is smaller than 128, continue as before. If there's no carry, meaning that the incoming character is 128 or larger, go to a special table, look up what I've got, see what I want sent instead of that, put it in the A register, and once again go on as before.

You then have to assemble this with CP/M's RMAC (relocatable code macro assembler), patch it into the BIOS, and use the CP/M SYSGEN function to put the new version onto tracks 0 and 1 of the WRITE system master disk. After that, any time I do a cold boot with that disk in the A drive, the interpreter is operating.

Obviously there can be more than one of these interpreter systems. For example, Micropro's Wordmaster, which we use for programming, wants Control-K as the up-cursor command. It was a trivial job to change the table in the CBIOS and have a new Wordmaster system master. Cold boot that, and the up-arrow key sends a Control-K. Of course, I have to remember not only to change system master disks, but to reset the computer when I change from using WRITE to using Wordmaster. The CP/M "warm boot" command (Control-C) won't do the job; warm booting causes CP/M to refresh its disk directories, but it doesn't read in the system track again.

I realize this is complex. It's important for several reasons. First, unless you buy your system—CP/M—from an outfit that gives you the *source code* to your CBIOS, you won't be able to do anything like that; and while there's no temptation to play about like that when you first get a machine, it's surprising how quickly the urge can come upon you. After all, I swore to Tony and my mad friend that I would never, never be interested in understanding operating systems and all that arcane stuff that goes on inside the machine . . .

Second, it shows just how complicated things can be just to get some convenient features. This is the appeal of the dedicated word processor: they've set up all this for you and put the dedicated keys on the console. All you have to do is read the labels. I agree that's tempting, too. The problems come after you've learned your system and you want to do things that weren't designed into the dedicated machine.

Third, there's a way out: fully reprogrammable keyboards. I'm told that the IBM keyboard is that way, which is why Jim Baen's Magic Keyboard program can reassign the various misplaced keys. I'm also told that the new Lobo Max-80's keyboard is completely under software control, so much so that it has to read in an assignment file when it does a cold boot. The Otrona Attache keyboard is much like that as well. Alas, neither IBM nor Otrona has given us the software and documentation to allow complete reassignment of keys. I

www.americanradiohistory.com

don't know whether Lobo intends to or not.

I wish everyone would, though. Then we could have truly customized text-editor programs.

M or N?

Mucking about with the CBIOS gave me the opportunity to check the timing on both the M-Drive and N-Drive. As most of you know, these are two similar schemes for fooling your computer into thinking that a big block of memory is a disk; programs read and write on the "memory disk" rather than an actual disk device. This is very fast. Unless you have a battery backup, it is also very temporary.

My Compupro 8085/8088 dual processor has both M-Drive (several of the new Compupro superfast RAM-21 boards) and N-Drive (Semidisk). Both have advantages: the M-Drive memory is available as regular memory when I run the machine as an 8088 (for instance with CP/M-86), but M-Drive can work only with the dual processor and a direct-memory-access disk controller. The Semidisk memory is not available for any purpose other than as a pseudodisk, but Semidisk will work with any S-100 bus machine (and versions are available for the IBM Personal Computer and the TRS-80 Model II also).

Whatever their relative advantages, they're nearly equal on speed. I used the RMAC assembler to assemble my CBIOS on M-Drive, then on N-Drive. The source code is 72K bytes long. Much of it is comments; Tony believes in well-annotated code. Still in all, it's a big enough job for a fair test. To make sure there were lots of disk operations, I had the assembler write both .PRN (printing) file and .SYM (symbol tables) onto the logged disk. The .PRN file is well over 100K bytes long.

It assembled in one minute and nine seconds on M-Drive and one minute and eleven seconds on N-Drive. This is as near to equal as makes no never mind. For comparison I then did the same job on the B-Drive. That took 2:49, more than twice as long.

M-Drive and N-Drive are also about equal in speed when used for spelling checking. I now have a new version of The Word Plus that runs fine with either M-Drive or N-Drive; and because of the pseudodisk speeds, it's practical to use The Word's Lookup feature routinely.

Now I have been accused of being a "typical academic snob."

Lookup is a search through the dictionary for words similar to your misspelling; with normal disks, the computer's search takes about as long as it would for me to look up the word in *Words Most Often Misspelled*, but it's really nice with pseudodisks.

More Benchmarks

My "Benchmark of Sorts" as reported in the October 1982 BYTE must have been reasonably popular; at least it drew a lot of mail, almost all favorable. The program fills two 20 by 20 matrices, multiplies them, and sums all the elements in the answer, using REAL variables. (Someone wrote to tell me I needn't have used reals, because integers would do. Of course that's true, but the point of the benchmark was to test ability to handle real numbers.)

John Aro of Caspar, Wyoming, used the matrix benchmark programs on a North Star Horizon Z80A (4 MHz); for the 20 by 20 matrices, he got two minutes and eight seconds (2:08) with North Star BASIC and 1:52 with FPBASIC; 1:10 with JRT (p-code) Pascal; 2:01 with CBASIC; and 0:24.6 with CB-80. These times seem reasonably comparable to those I got.

Using FORTRAN, Harold Conrad of Taber, Alberta, Canada, got a time of 39.3 seconds for the 20 by 20 case on a 2-MHz 8080A. This is again comparable but slightly faster than the MT+ time obtained on my 8085.

Another letter was from Professor Roger Kirchner of Carleton College in Northfield, Minnesota (where the James and Dalton boys came to grief). Professor Kirchner ran my benchmark program on his TI-99, using the TI-99/4A p-code Pascal compiler.

His time for the 20 by 20 was 75.7 seconds. By comparison, Pascal M, which also uses p-code, did the same program in 59 seconds on my Compupro dual processor. (And see above, 8.9 seconds for the Sage 68000.)

Professor Kirchner, incidentally, argues in favor of Logo as the beginner's language of choice.

More Things My Postman Brings Me

This column generates a lot of mail. Most is favorable. I brood too much about the unfavorable mail, but there's not much to be done about that tendency; I don't know any writer who doesn't ignore 30 good letters to worry excessively about one poison-pen epistle.

Sometimes, though, I just don't know what to do, as for example with the pair of letters I got concerning Edsger Dijkstra's "unpleasant truths" (see the October 1982 BYTE). Professor Edward O'Connell Jr. of the Psychology Department of Syracuse University tells me "BASIC is indeed brain damaging," and I was far too unkind to Professor Dijkstra, who was essentially correct in his observations.

Meanwhile, John S. Harbaugh of the Diebold Company says he's been programming for 23 years, and that "Mr. Pournell (sic) and Professor Dijkstra are typical academic snobs"; he takes me to task for being too partial to Pascal and insufficiently appreciative of BASIC.

In fairness to Mr. Harbaugh, it looks as if he'd read the quotes from Dijkstra and skimmed so fast he thought I agreed with them.

Professor O'Connell's letter is another matter. I was going to let it go, but I've just read it again, and it needs a reply.

He says, "I have been in the field since 1959, through FORTRAN, IPL-V, COBOL, GATE, PL/I, BASIC, APL, and Pascal. The only one of the list that I have found teachable is

www.americanradiohistory.com

INFORMA X

The software system from tomorrow.

Beyond DBMS... beyond user-friendly ...true multi-user.

The first information management system created from its inception for the multi-user.

The first truly **professional** system created for the **programmerless** environment. INFORMA X™ brings even to the first time user programming capabilities never before thought possible with microcomputers.

Worlds beyond in speed, security, capability and flexibility:

SPEED. The first information management system for micros that is fast enough to accommodate full operational interactive online computing.

SECURITY. The first micro system providing the total security necessary for any business computing situation to function properly. INFORMA X™ provides full transaction recording for audit purposes and individual security to the field level.

CAPABILITY: Functions far beyond all current micro systems with its unlimited number of files; multiple screens per record; interactive file sharing of data; extensive calculation and math computations.

FLEXIBILITY: INFORMA X™ permits complete modification of any file, record or field previously entered with no damage or loss to existing data; change fields (key or non-key) or change calculations at will; and much, much more.

If you have not experienced INFORMA X™, you are worlds removed from the leading edge of microcomputing's true Information Management capability.

ABACUS DATA is totally dedicated to helping your business move into the creative future of software. We welcome your questions and comments. Please call our toll free numbers – available for service, not just sales: **1-800-874-8555.** In Florida call collect, **0-904-398-9547.**

abacus data, inc.™
1920 San Marco Boulevard
Jacksonville, Florida 32207

Current Equipment Specifications

NOW AVAILABLE for **TeleVideo®, BOS®, IBM PC®, MuSYS®, DEC®, NEC®,** and others with Z80, 8088, 8086 CPU's using CP/M®, CP/M-86®, MmmOST®, TurboDOS®, dpc/OS®, operating systems. Minimum memory 52K. Call for others.

Circle 5 on inquiry card.

www.americanradiohistory.com

VISICALC*

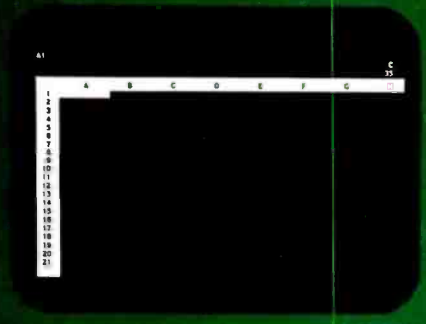

INTERACTIVE ELECTRONIC WORKSHEET **YES**

ON-LINE REFERENCE GUIDE **NO**

"NAMING" OF CELLS OR AREAS **NO**

PLAIN ENGLISH PROMPTS **NO**

INDIVIDUAL COLUMN WIDTHS **NO**

EXTENSIVE FORMATTING CAPABILITIES **NO**

PROTECTED CELLS **NO**

MULTIPLE, LINKED WORKSHEETS **NO**

SORTING CAPABILITY **NO**

VisiCalc® was a swell idea for then.

The next generation. First generation electronic worksheets were a good idea. They were early software management tools that could eliminate a lot of hours with a spreadsheet, calculator, pencil and eraser. Enter Multiplan, the next generation electronic worksheet that's as easy to use as it is useful.

Make comparisons. Compare Multiplan to any of the earlier electronic worksheets. We've given you some "prompts" above.

Compare learning time. Multiplan's tutorial book brings you up to speed. Fast. But Multiplan doesn't stop there. Multiplan's On-line Reference Guide gives you instant help if you have questions. It knows where you are in Multiplan and offers information related to your problem, right on the screen.

Compare ease of use. All Multiplan prompts are full length words or phrases. And Multiplan provides "naming," the ability to assign a plain English name to any cell or area. "Gross Profit = Sales—Cost" rather than "AA44=AZ23—BK154." Which means you can work more intuitively. And faster.

Compare utility. Multiplan lets you link related worksheets so that information is transferred between them automatically. For instance, you can keep regional sales forecasts on separate sheets but link them with your overall company forecast. Then, just change the forecast for any region, and the company forecast sheet is updated automatically. Something you can't do with first generation worksheets.

Compare reports. Not just the work you can do, but the way you can present it. Multiplan's flexible formatting options allow you to produce presentation-quality reports. And its sorting capability lets you sort by either alphabetic or numeric order. So a sales manager who normally lists sales regions alphabetically could sort by amount sold and conveniently rank by sales performance. The

*Based on features in releases VC-202B0-AP2 and VC-156Y0-IBM of VisiCalc on the Apple II and IBM-PC respectively.

www.americanradiohistory.com

MULTIPLAN

INTERACTIVE ELECTRONIC WORKSHEET **YES**

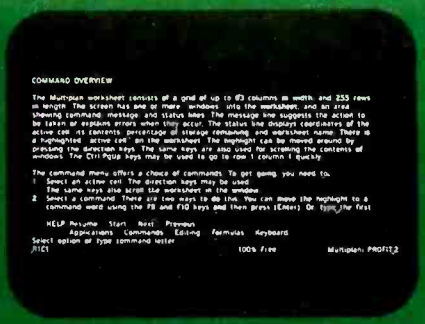

ON-LINE REFERENCE GUIDE **YES**

"NAMING" OF CELLS OR AREAS **YES**

PLAIN ENGLISH PROMPTS **YES**

INDIVIDUAL COLUMN WIDTHS **YES**

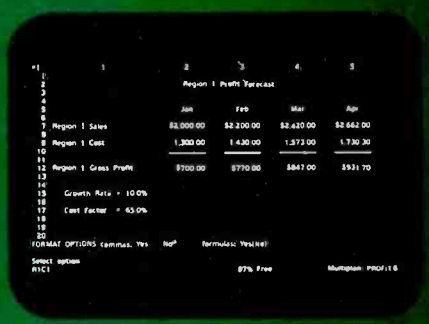

EXTENSIVE FORMATTING CAPABILITIES **YES**

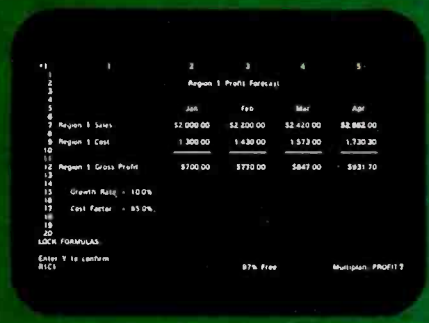

PROTECTED CELLS **YES**

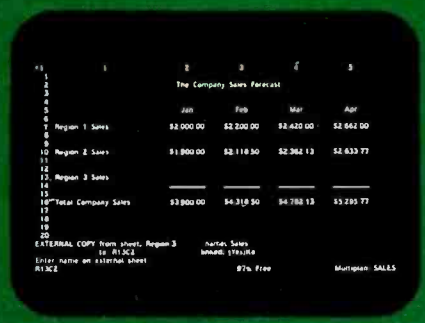

MULTIPLE, LINKED WORKSHEETS **YES**

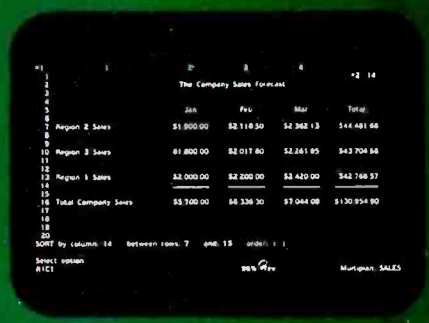

SORTING CAPABILITY **YES**

Multiplan™ is a great idea for now.

result is a more meaningful and useful presentation of data.

Compare availability. With Multiplan, you're not limited to a single range of computers. Multiplan is available for Apple® and for microcomputers that run MS™-DOS, XENIX,™ or CP/M-80® operating systems. Multiplan supports both 40- and 80-columns on the Apple II.

Compare the source. Microsoft was the world's first microcomputer software company. Today, Microsoft software is running in well over a million installations, worldwide. Languages. Utilities. Business programs. All, maintained at the state-of-the-art.

Compare for yourself. Drop into your computer store. Compare Multiplan's powerful, user-oriented features to any electronic worksheet on the market. If you've been using VisiCalc, Multiplan's ability to directly utilize your VisiCalc files lets you easily upgrade to Multiplan. And that's just another of the many features designed to make Multiplan the electronic worksheet for now. And years from now.

BETTER TOOLS FOR MICROCOMPUTERS

MICROSOFT®

Microsoft is a registered trademark, and Multiplan, XENIX, and MS are trademarks of Microsoft Corporation

VisiCalc is a registered trademark of VisiCorp

CP/M-80 is a registered trademark of Digital Research, Inc.

Apple is a registered trademark of Apple Computer, Inc.

www.americanradiohistory.com

Attention Dealers:

General Accounting Programs

Cougar Mountain's general accounting programs operate on CP/M, MP/M compatible systems, including TurboDos and MmmOST. Designed to work on hard disk systems.

Program Features:

- **Multi-User** w/record & file lock
- **Multi-Company** use w/consolidation
- **Accounting Integrity** w/an audit trail which offers data integrity to CPA or Comptroller.
- **Outstanding Documentation**
- **Fully Integrated** w/single source entry or stand alone
- **C.A.T.S.** Computer Assisted Tutorial Software w/3 levels of user help Plus can be real time or modified batching for users with larger volume of data input.

Cougar Mountain Offers You:

- **Increased Sales**
- **Complete Dealer Support** through our excellent staff of Customer Service Representatives
- **Training Seminars**
- **Assistance** in system conversion and interfacing programs
- No Risk!
  MONEY BACK GUARANTEE!



Cougar Mountain Software

10 S. Latah Box 6886
Boise, ID 83707
208-344-2540

TM: CP/M & MP/M — Digital Research; TurboDos — Software 2000; MmmOST — TeleVideo

Pascal. . . . Diddling about with BASIC as a first language leads to infantile fixations. Pascal can be taught, is logical, and demands very little more than BASIC initially. (By the way, how many times do you want to write single-statement programs of the form 'PRINT 2*2'?)"

Now what is one to make of all this? According to Professor O'Connell's letter, he has been teaching for 18 years that which cannot be taught; for I doubt seriously that he has long been teaching Pascal. Has he really been taking money under false pretenses? FORTRAN and COBOL are not my favorite languages, but ye gods, useful computer programs didn't start with Pascal!

It's certainly possible to rationally debate what is the best introductory teaching language. It's even possible that there is no "best" for all ages; that BASIC or Logo is "best" for young children, while older students might better start with Pascal or even LISP. One thing I am certain of is that letters that inform me that I am "infantile, naive, biased, and ignorant" are not likely to change my views, and I'd have thought a professor of psychology would realize that.

He does say my columns are "always interesting" and that he likes my reviews of equipment and software.

The Language Debate Continues

Mr. Paul A. Sand in defense of Pascal says, "Pascal is primarily useful for composing large programs. Its advantages don't usually show up in benchmarks and tutorial texts. A good analogy is one I heard from an employee of Apple Computer: it is very impractical to use a Boeing 747 to run to the corner grocery store; it's equally impractical to walk from New Hampshire to California. Similarly, it is impractical to use Pascal for small programs, and BASIC—any version—is often hopelessly underpowered for larger programs."

I agree with this except for the final sentence, which is ambiguous. If he is saying that *no* version of BASIC is useful for large programs, I think he may be wrong.

SPP to the Rescue!

One of my major dislikes of Pascal as it is normally implemented on microcomputers—I have no experience with it on big machines, and anyway that's irrelevant since I'm writing for "the Small Systems Journal"—is that Pascal tries to make me think like a computer. Indeed, Mike Lehman put it very well in the manual to his Speed Programming Package:

> The Speed Programming Package helps the user to remove all "dumb" errors prior to compilation. One of the limits to productivity is the human frustration threshold. One must experience first-hand reaching the end of a four thousand line source compilation only to find that a semicolon (or period) was missing to fully understand the situation. One must then re-edit and recompile only to find that it may still be wrong, leading to only more and more frustration. This tends to lead programmers to become extremely careful and spend much time simulating the compiler in their heads to save time when the computer should be able to make the production of programs easier, not harder.

That is precisely the point I have been trying to make about Pascal: that the implementations I have worked with seem well designed to drive you to either think like a computer or go quite mad. Perhaps Professor O'Connell and Mr. Nelson and my other detractors never leave out semicolons. Perhaps they are correct when they condescendingly tell me that if I had enough experience I wouldn't make syntax errors; but perhaps they are not. Mike Lehman has far more experience than I do; after all, he wrote the Pascal MT+ compiler, first in UCSD Pascal, then in MT+ itself.

I don't want to have to think like a computer. I want the computer to compute, leaving me to get my own work done. I don't much care whether my programs meet some outside criterion of "elegance" or even "efficiency." ("After all," as Carl Helmers says, "if you define 'efficient' as 'using least memory,' then the old one-letter BASIC variables were efficient. . . .") I do care that my programs are easy to work on at periodic

www.americanradiohistory.com

EXTRA

EXTRA

S-100 World News

MACROTECH International Corporation 22133 Cohasset Street, Canoga Park, California 91303 • 213-887-5737

Megabyte S-100 Memory Here Now

Major breakthrough made by Macrotech International Corporation

CANOGA PARK (MI)-January 20, 1983-Mike Pelkey, president of Macrotech International Corporation, today announced a major technological breakthrough in S-100 dynamic memory board density. A full megabyte of high speed dynamic ram is contained on a single standard size S-100 multilayer P.C. board. The product, dubbed 'Max' meets all IEEE/696 mechanical and electrical specifications and byte parity generation/checking is included as a standard feature. Max supports IEEE/696 24-bit addressing (selectable at any 128K boundary), 8/16 data transfer protocol, phantom line operation, and the same ultra low noise bus signal filtering provided on Macrotech's popular high performance 256K dynamic memory board.

Max is in production now and shipping at the all-time low cost per bit list price of $1,983 in unit quantity.

Bruce Kimmel, Macrotech's sales manager reports that customers are being served on a "first-in, first-out" basis and warns that due to a high incidence of graphics and similar memory-intensive applications, along with an unwillingness in the trade to pay exorbitant prices for memory, backlogs may occur for Max which could delay shipments against some late orders. With the improbability of second sourcing for some time, interested parties are urged to get orders in as soon as possible. Bruce can be contacted at 22133 Cohasset Street, Canoga Park, California 91303, or reached by telephone at (213) 887-5737.

M³ Family Growing

Another product recently introduced by Macrotech is soaring to the top of the best-seller list. The Multiuser II is a 128 kbyte 70ns CMOS static ram memory board that is unquestionably without peer in the S-100 marketplace. It's a 6-layer board with blazing speed, 8/16 data transfer protocol, and ultra-low power external battery support. The same M³ memory mapped addressing architecture so in demand with system software professionals is now standard in the new Multiuser II. M³ was first developed by Macrotech for the popular Multiuser I 256K dynamic ram board to meet the demanding requirements of today's sophisticated systems.

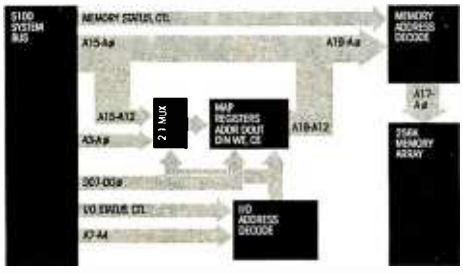

Macrotech's advanced memory mapping scheme allows each 4K block of the 16 bit (64K) logical addresses to be dynamically translated to any 4K block of the physical memory. Global memory can be configured to any size and located anywhere in the logical address space. All remaining memory can be addressed through the remaining logical address space by simply reloading the mapping registers to address the desired physical memory blocks. This scheme permits unlimited use of all on-board physical memory.

Where it all started: pictured is the popular Multiuser I, Macrotech's first product. This widely used board provides 256 Kbytes of dynamic ram with 4K page memory mapping (called M³), 8/16 bit operation, 24 bit addressing and byte parity checking.

Virtual Disk Flexibility Cited

CANOGA PARK-January 20, 1983-Macrotech reports their Multiuser I and Multiuser II S-100 ram memory boards can be used as both system memory and "virtual disk" storage in eight or sixteen-bit applications. Addressing flexibility is the key. The Multiuser M³ memory mapped addressing is guaranteed to allow memory partitioning to fit the exact requirements of your system without ever wasting a single byte.

Today's trend in operating systems appears to include extended memory capabilities to allow for the recent technological advances in semiconductor memory. A close look at Digital Research's new CP/M 3™ for example, would lead you to believe that it was especially created to fit Macrotech's family of Multiuser memory boards. (It wasn't, but try to find one that fits better.)

MACROTECH Announces Distribution Expansion

CANOGA PARK-January 20, 1983-Macrotech is now establishing domestic and international dealer/representative networks. The California based firm is expanding it's customer support through these channels and invites inquiries. Volume users and retailers should contact the company for details.

Macrotech's marketing director Bob Ryle states, "IEEE/696 has made S-100 legitimate. It is rapidly gaining acceptance due to its inherently superior speed characteristics." Ryle attributes the growing demand for Macrotech memories to Macrotech's strict adherence to the IEEE standard. Circle 253 on Inquiry card.

www.americanradiohistory.com

intervals.

Let me praise Lehman's Speed Programming Package. When Mike first sent me Pascal MT+, he sent along the SPP; but alas, he sent no documents for it, and I was never able to use it. Every now and again I got puzzled letters from readers who were using SPP, and who didn't understand some of my frustrations with Pascal. Why didn't I use SPP?

Meanwhile, Digital Research was redoing the SPP documents, and they'd send them along Real Soon Now. Eventually they came.

Put simply, SPP is indispensable. It's not wonderful. It could stand some improvements. Even so, it's vital that if you program in Pascal MT+, you must get SPP.

SPP is a whole package of programming aids, including both editing and syntax-checking functions. As Paul Sand put it in his thoughtful letter, many of Pascal's deficiencies are disadvantages of compilers rather than interpreters; compilers are notoriously unfriendly. With SPP, though, some of those deficiencies are remedied.

SPP contains a screen-oriented editor somewhat similar to Wordmaster. Some changes have been made to the Wordmaster command structure and not all have been well chosen; I particularly miss Wordmaster's little "QP" buffer, and I can't understand why Lehman made some of his other changes. No matter. You can always use Wordmaster to create most of your program, then go to SPP for the final touches; or, more likely, you can simply get used to SPP's quirks.

Incidentally, I'm writing an SPP editor CBIOS to enable my Archive keyboard to work directly on SPP's editor.

The SPP editor has some of the features of the UCSD Pascal editor. It aids in indentation, for one thing. There's also a "pretty print" reshuffler: once your program has been created, SPP will automagically reformat it with levels of indentations. That by itself shows you many of your horrible mistakes, such as missing END statements.

Finally, from within SPP you can do syntax checking. That goes *fast* on the M-Drive; and when a syntax error is detected, SPP puts you automatically in the text editor, with the cursor where the compiler thinks the error was. (The UCSD editor on the Sage 68000 system does this also.)

There are more valuable features to SPP. It will check the spelling of your variables. If it finds a variable used precisely once, that's a pretty good candidate for a spelling error. It will log source-code modifications. It will even run special procedures you write yourself.

In other words, I'm wild about SPP, and I think it's high time that *everyone* selling Pascal get busy to provide something similar; the effect on the national blood pressure will be dramatic.

Database the Easy Way

If I'm after a quick and easy way to store data, I generally use my own

DECADES OF SERVICE
Washington Computer Services
97 Spring St., New York, NY 10012 an affiliate of WASHINGTON ELECTRIC COMPANY est. 1912
TO ORDER: Call our toll-free number: (800) 221-5416. In N.Y. State and for technical information: (212) 226-2121. Hours: 9 AM-5:30 PM (EST) Monday–Friday TELEX: 12-5606 CABLE: WASHCOMP NYK

The Professional's Workstation

NEC APC
8086. 16 bit processor; Two 8" DSDD disk drives; 128K RAM (to 640K); green or RGB color screen.
PERFECT FOR:
Word Processing
CAD/CAM graphics (1024 x 1024 resolution)
DataBase Management
Accounting
Chang Lab's Microplan
IBM emulations
CP/M-86, MSDOS, UCSD P.

This new state-of-the-art work station out-performs all others near its price range.
PRICES START BELOW $3300.00 (One disk drive, green)
NEC COMPUTERS AND MONITORS On N.Y.S. Contract #P-07220

PLEASE! Do not confuse us with mail order dealers. We are a full service distributor serving the data processing & installation needs of business & industry from micros to mainframes. System houses, educational institutions & governmental agencies given special consideration. Leasing available. N.Y. State agencies, municipalities, and schools—call us for information on our O.G.S. term contracts on hardware & software.

Please call to make an appointment for demonstration of this extraordinary computer at our showroom. Prices subject to change without notice; call for latest prices. Prices include 3% cash discount. N.Y. residents add sales tax. CP/M® is a trademark of Digital Research. All sales subject to our standard sale conditions (available on request). Above prices do not include customization or installation.

STEP UP!
Quality Software for Apple II, Apple ///, IBM PC.
Medical, Dental, Office And Educational Software
For further information call
(619) 365-6668
Monument COMPUTER SERVICE
Village Data Center - P.O. Box 603
Joshua Tree, California 92252

Circle 450 on inquiry card.
Circle 255 on inquiry card.
www.americanradiohistory.com

OCTOPUS

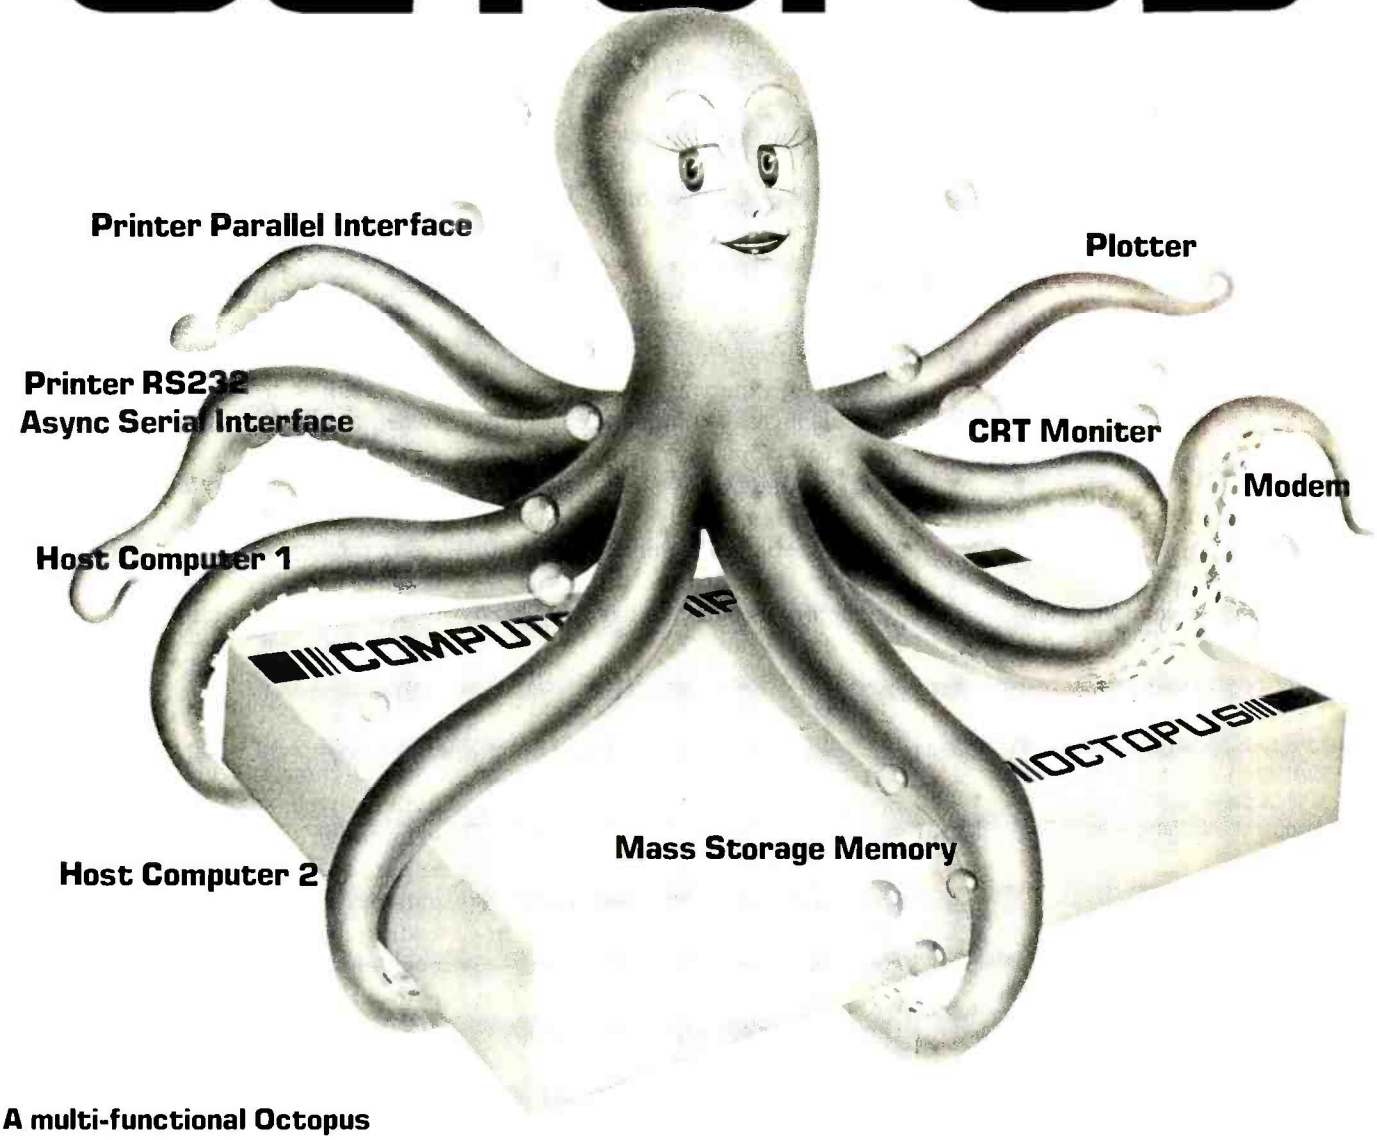

A multi-functional Octopus

It's a printer buffer, a printer spooler, frees computer time and enables copying capability.

A data protocol translator:
parallel to parallel parallel to serial
serial to parallel serial to serial

A multitask data channel controller:
- enables host computer to communicate to multiple peripherals simultaneously.
- enables multiple computers to communicate with multiple peripherals simultaneously.
- compatible to most interface protocols.

All in one for only $197.50.

Standard product includes: Z80 CPU
One parallel input port (centronic printer and IBM PC compatible), one parallel output port (centronic printer and IBM PC compatible), two Serial RS232 Asynchronous ports, 8KB resident memory.

Options include:
Up to 256KB upgradable memory
Graphic enhancements.
Modem with Auto Dial capability.
Two additional parallel ports
Two additional Serial RS232 Asynchronous ports.
Customized software enhancements.

computer peripherals

1117 Venice Boulevard Los Angeles CA 90015 Call Collect (213) 298-1297 Telex: 194561 LSA

Circle 106 on inquiry card.

www.americanradiohistory.com

Circle 235 on inquiry card.

Software Associates

now introduces a new line of affordable quality software

$35.00 EACH

DATABASE SYSTEM

A user-friendly file management system. Includes:

- On-screen design of input and report formats
- Multiple field keys with capability to search on any field
- Query language included for easy retrieval of file information

SORT PACKAGE

A stand-alone, easy to use sorting package using fast heapsorting. Includes:

- Sorting on up to 10 keys
- May be parameter file driven
- A separate file merge capability

INDEX CARD FILE

A computerized index card file with user designed format. Includes:

- 60-column x 14-line size
- Search for any keyword(s) within file
- Sort "cards" into smaller categories
- Perform mathematical functions on given portions of a card

SOFTWARE ASSOCIATES
38A W. Oakland Avenue
Oakland, N.J. 07421
(201) 337-2002

Formats: IBM PC (PC-DOS or CP/M-86); Osborne; NorthStar; Altos. Call about the availability of other formats.

Requirements: CP/M-80, CP/M-86, IBM PC-DOS (MS-DOS); 64K RAM; Addressable cursor terminal; Printer capable of 132 column.

Terms: Money order, cashiers check, Visa, MasterCard, personal or company check (allow 14 days to clear), COD (add $4.00) – Include $5.00 for shipping and handling. N.J. residents add 6% sales tax. All software shipped UPS (ground). UPS Blue Label add $3.00 per item.

Trademarks: Software Associates; IBM, IBM PC-DOS – International Business Machines, Inc.; CP/M-80, CP/M-86 – Digital Research, Inc.; MS-DOS – Microsoft, Inc.; Osborne – Osborne Computer Corporation, NorthStar – North Star Computers, Inc.; Altos – Altos Computer Systems.

© 1983 SOFTWARE ASSOCIATES

Minimum Data Base because it's simple to use and understand, and so long as there aren't more than a hundred or so records of more than eight to ten items per record, MDB is more than adequate.

More complex data storage and retrieval requires more sophisticated programs. One such I've long recommended is dBASE II. (I have several rivals of dBASE II here, and I hope some time to try them; the problem is that between MDB and dBASE II there's been no *need* for anything else.)

The only real problem with dBASE II is the documentation; getting started with it from scratch can be a frustrating experience. It's not an impossible task; a number of friends, some of whom have zero experience with computers, have taken dBASE II and created really sophisticated record-keeping structures with it with no help from anyone. Still, the introductory documents have not been its strongest point.

Comes now Fox & Geller with its Quickcode program; and a good part of the problem of getting started with dBASE II is solved. The Quickcode programs and book will help you get set up with dBASE II and get you through the transition from "I just want to do my Christmas card list" to generating sophisticated accounting programs.

It works by "screens"; that is, you can use Quickcode to set up the structure of the database, one screen per record; after that, you enter data into the database by filling in the blanks, a screen at a time. Anyone starting out to learn to use dBASE II can save a good bit of time and frustration by getting the Fox & Geller Quickcode as well. Quickcode would also be useful for anyone using dBASE II as a programming language. (Many do; it's possible to write some very sophisticated programs in dBASE II.)

Keyboard Companion

One day there appeared via UPS five boxes, each about two feet long by half that high and wide. The only clue as to what they contained were the words "Keyboard Companion." When we opened them, we found several copies of a device with that name. Each was slightly different. One was designed for use with a TRS-80, another for an Apple, the others for more general systems.

The Keyboard Companion is a combination copyholder and tilted table. It consists of some metal box-like structures to elevate your monitor screen and an attractive nonmagnetic black Bakelite board with an aluminum edge holder at the bottom. A plastic line guide/paper holder fits onto one edge. The board attaches to your screen via Velcro strips; the bottom edge can rest on your keyboard or alternatively on the table that holds the keyboard. The result is that you've a table between the keyboard and the monitor screen for notebooks, program copy, notepaper, or anything else you might want to be looking at while using the keyboard.

Our Keyboard Companions sat unopened for months. Then Barry Workman took the TRS-80 away, and one of the students remembered we had a Companion for it and sent that along. Later we got the Apple, and out came another. They worked out very well; so well that I fished out yet another Companion and set it up as part of Zeke II's system. The Companion has proven to be a very useful addition to the system, and I am beginning to wonder how I got along without it for so long.

When you're designing your computer setup, it couldn't hurt to look into the Keyboard Companion line; this might be just what you're looking for. They come in 16- and 20-inch widths, with screen holders designed for most popular monitors.

New Operating Systems

As I write this, they're arranging to get me a test copy of CP/M 3.0. I've just finished speaking with my colleague Mark Dahmke, who already has it; Mark likes it a lot. It has a number of attractive features—including no more Control-C every time you change disks. More on that next month.

I'm also eagerly waiting for Tony to finish work on the CBIOS for CPM-86 to run on the Compupro

Text continued on page 242

www.americanradiohistory.com

64K STATIC RAM MEMORY

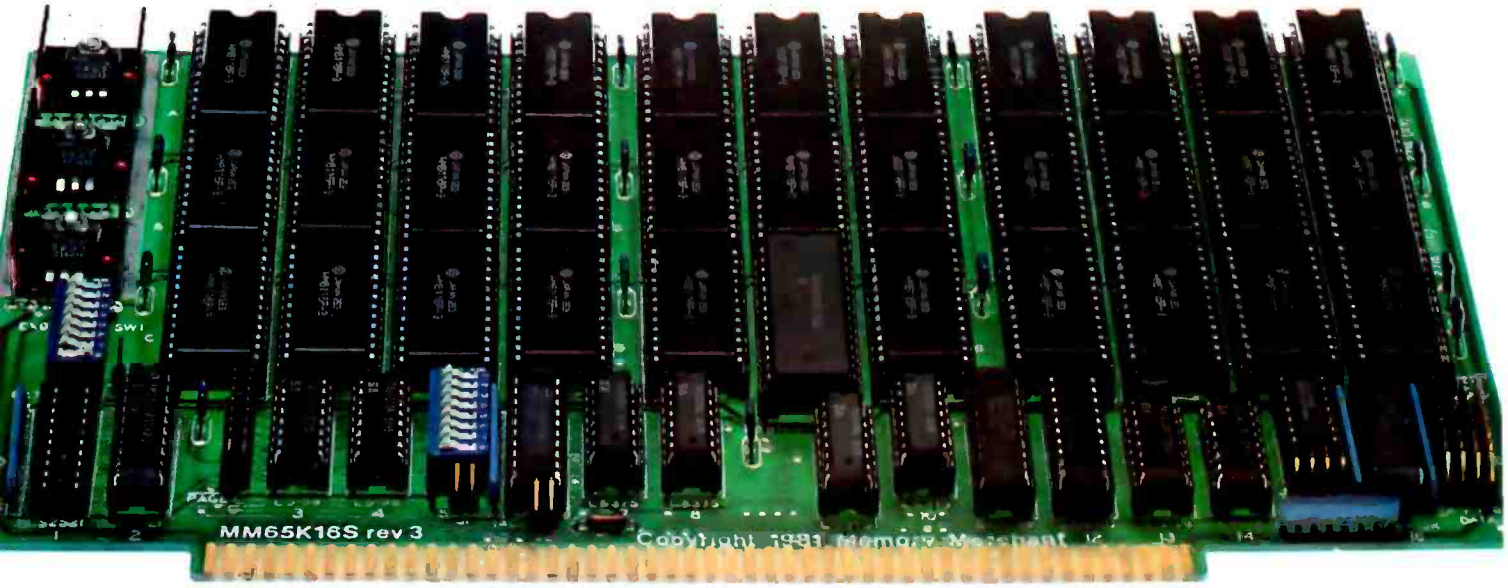

S-100 STATIC MEMORY BREAKTHROUGH

Finally, you can buy state-of-the-art S-100/IEEE 696 static memory for your computer at an unprecedented savings.

Memory Merchant's memory boards provide the advanced features, quality and reliability you need for the kind of operational performance demanded by new high-speed processors.

Completely Assembled.

These memory boards are not kits, nor skeletons — but top-quality, high-performance memories that are shipped to you completely assembled, burned-in, socketed, tested and insured with one of the industry's best warranties.

Superior Design & Quality.

Memory Merchant's boards are created by a designer, well known for his proven ability in advanced, cost-efficient memory design. Innovative circuitry provides you with highly desired features and incredible versatility.

Only first-quality components are used throughout, and each board is rigorously tested to assure perfect and dependable performance.

No Risk Trial.

We are so convinced that you will be absolutely delighted with our boards that we extend a no-risk trial offer. After purchasing one of our boards, you may return it (intact) for any reason within 15 days after shipment and we will refund the purchase price (less shipping).

NEW S-100 PRODUCTS COMING SOON:

* DUAL 8/16 BIT CPU BOARD
* 128K 8/16 BIT STATIC RAM
* 256K 8/16 BIT DYNAMIC RAM

$629.

48K PARTIALLY POPULATED $519.
32K PARTIALLY POPULATED $409.

64K RAM, MODEL MM65K16S

- 64K × 8-bit
- Speed in excess of 6 MHz
- Uses 150ns 16K (2K × 8) static RAMS
- Ultra-low power (435 Ma. max. — loaded with 64K)
- Bank Select **and** Extended Addressing
- A 2K window which can be placed anywhere in the 64K memory map
- Four independently addressable 16K blocks organized as:
  — Two independent 32K banks **or**
  — One 64K Extended Address Page **or**
  — One 48K and one 16K bank for use in MP/M[1] (option)
- Each 32K bank responds independently to phantom
- 2716 (5V) EPROMS may replace any or all of the RAM
- Field-proven operation in CROMEMCO CROMIX* and CDOS*.
- Compatible with latest IEEE 696 systems such as Northstar, CompuPro, Morrow, IMS, IMSAI front panel, Altair and many others.

OEM and DEALER inquiries invited.

Memory Merchant™
14666 Doolittle Drive
San Leandro, CA 94577
(415) 483-1008

Circle 264 on inquiry card.

FULL TWO-YEAR WARRANTY.

The reliability of our boards, through quality-controlled production and proven performance, has enabled us to extend our warranty to a full two years. That's standard with us, not an option. This includes a 6-month exchange program for defective units.

Shipped direct from stock.

All Memory Merchant's boards are shipped direct from stock, normally within 48 hours of receipt of your order. Call us at (415) 483-1008 and we may be able to ship the same day.

16K RAM, Model MM16K14

16K STATIC RAM $169.

16K × 8 Bit
Bank Select & Extended Addressing
Four independently addressable 4K blocks
One 4K segment equipped with 1K windows
Uses field-proven 2114 (1K × 4) RAMS
Low Power (less than 1.2 Amps)
Runs on any S-100 8080, 4 MHz Z-80 or 5 MHz 8085 system.

Prices, terms, specifications subject to change without notice.

*Cromix and CDOS are trademarks of CROMEMCO.
[1] MP/M is a trademark of Digital Research

www.americanradiohistory.com

Number One Add-On

Communications

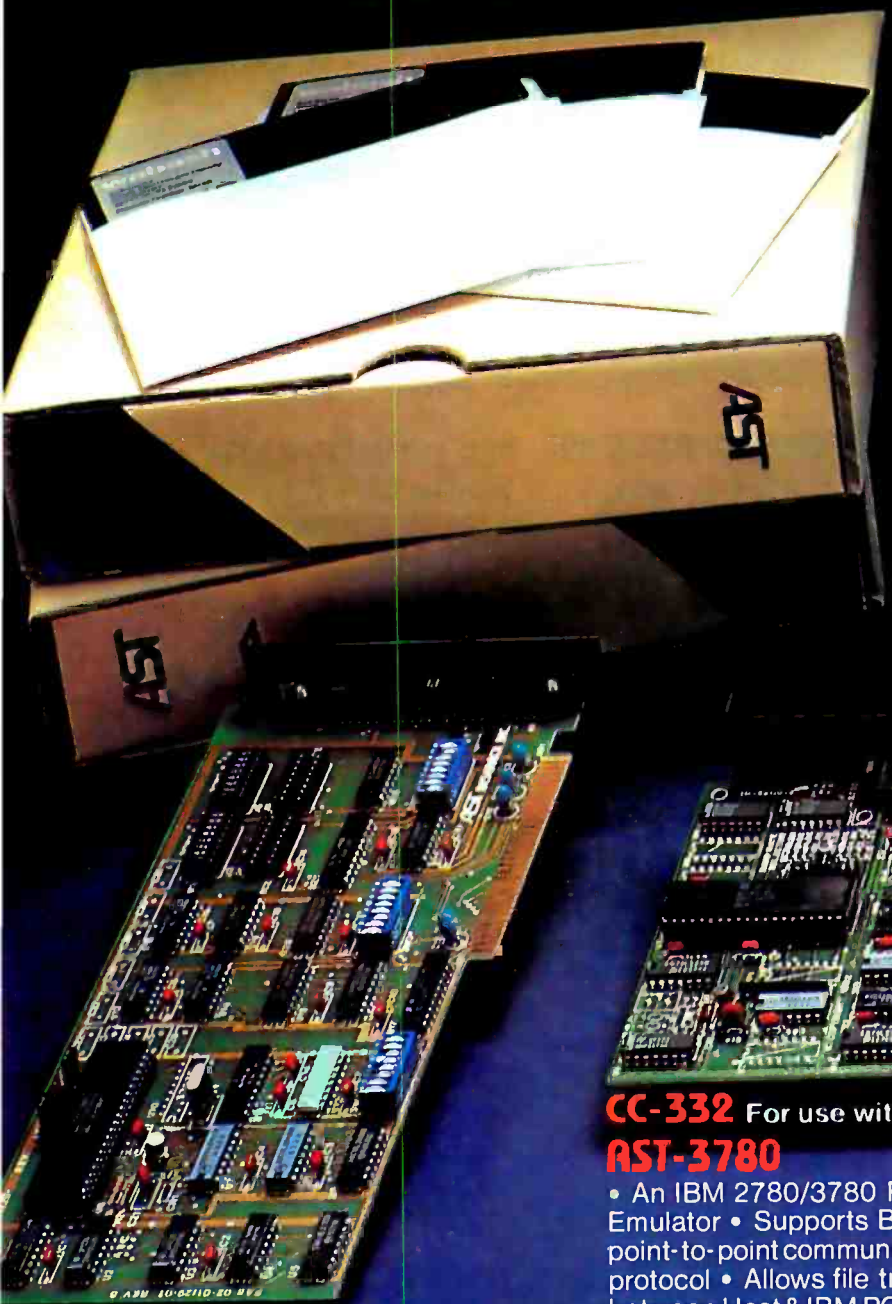

Advanced Comm. Card (CC-232)

- Programmable to communicate in Bisync, SDLC, HDLC, and Async protocols.
- Two Ports of RS 232

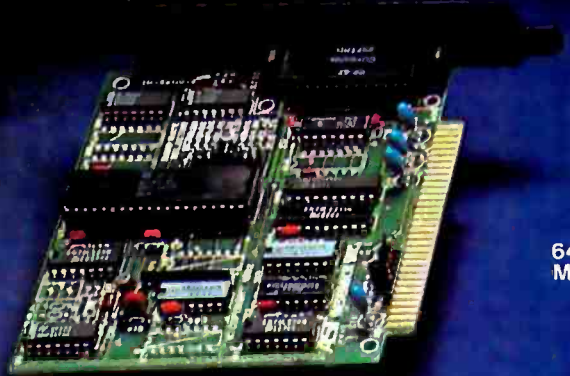

CC-332 For use with **AST-3780**

- An IBM 2780/3780 RJE Emulator • Supports Bisync point-to-point communications protocol • Allows file transfer between Host & IBM PC • Ideal for IBM **System 34, 38, 4300**

AST-SNA

- Emulates IBM 3274 Model 51C Control Unit
- Emulates 3278 Display Station • Emulates 3287 Type Printer • Optional 3770 Emulation • Cluster Controller Operation • Protocol Converter Support

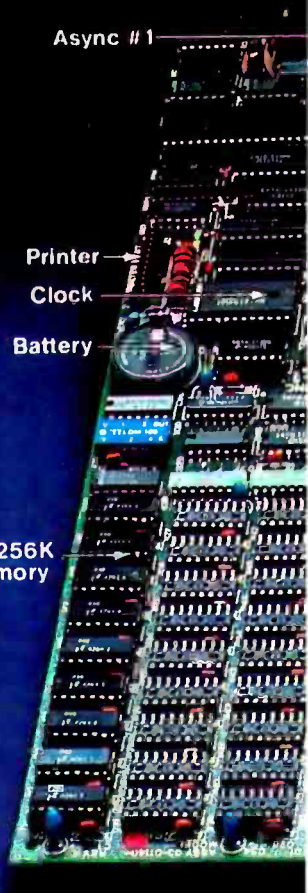

ComboPlus™

- Features 64K-256K M
- One Clock Calendar
- One IBM Compatible Port (opt.) • One IBM C ble Parallel Printer (opt. Battery Backed-up Clo Calendar (opt.)

AST products are available from Computerland, Entre', ComputerMart and selected dealers worldwide.

www.americanradiohistory.com

Products for IBM PC

Multifunction Cards

All Multifunction Products include:

- SuperDrive™ – a Disk Emulator Utility Program
- SuperSpool™ – a Printer Buffer Utility Program

Optional: New ConnectALL™ Connector Mounting Bracket

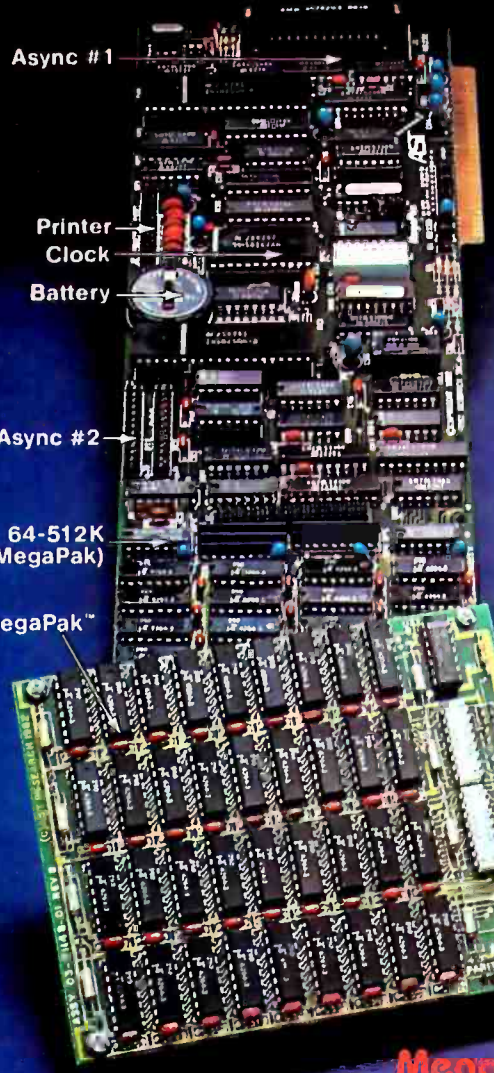

I/O Plus™
Maximum 6 Functions (no memory) • Clock Calendar (std.) • IBM Compatible Async Port #1 (std.) • IBM Compatible Async Port #1 (opt.) • IBM Printer Port (opt.) • SuperDrive (disk emulator prog.) • SuperSpool (print spooler prog.)

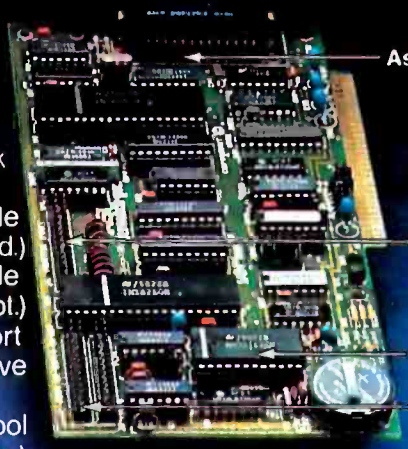

ConnectALL™
NEW! AST Proprietory Connector Mounting Bracket (does not include cables shown in illustration)

MegaPlus™
• 64K-512K (with MegaPak) • Two IBM Compatible Async Ports (1 std., 1 opt.) • One IBM Parallel Printer Port (opt.) • One Battery Backed-up Clock Calendar std.) • Ideal for Concurrent CP/M, MBA, VISI Series software packages.

AST RESEARCH INC.
Dealer Inquiries Welcome

2372 Morse Avenue
Irvine, Calif. 92714
(714) 540-1333

Circle 3 on inquiry card.

www.americanradiohistory.com

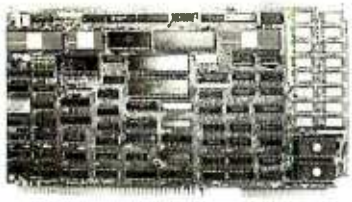

THE SBC80A designed for multiprocessor /slave or I/O processor, has on board Z80A-CPU; DMA; 128K dual ported RAM,no wait state, byte/word accessible;Eprom sockets up to 32K; 2 RS232; 2 parallel ports;Memory Map Prom;3 counter/timer; floppy controller;hard disk interface; math chip AM9511;20 bit Intel Multibus 21 vectored interrupts;auxiliary power input for stand alone.

INNOVATIVE RESEARCH, INC.
17071 Kampen Ln,Huntington Bch,CA92647
714-842-0492.Multibus Intel trademark.

Circle 501 on inquiry card.

Volrax® SC-01A
SPEECH SYNTHESIZER
Volrax®
$50 Each
($40 in hundreds)
Order in Ones or Thousands

The SC-01A Speech Synthesizer is a completely self-contained solid state device. This single chip phonetically synthesizes continuous speech of unlimited vocabulary.
Computer interfaces and text-to-speech algorithms also available for product development.
Micromint is the largest U.S. distributor of the SC-01A. Call us for a price quote.

Call 1-800-645-3479, in N.Y. 1-516-374-6793
MICROMINT INC.
561 Willow Avenue
Cedarhurst, NY 11516
Add $2.00 for shipping & handling.
MICRO MINT

Circle 502 on inquiry card.

ULTRA-RES GRAPHICS
N.E.C. UPD7220 GRAPHICS PROCESSOR
S-100 BUS B&W $995.00
—1024 x 1024 PIXEL PLANE
—Up to 8 VIDEO PLANES
S-100 BUS COLOR 1250.00
—THREE 512 x 512 PLANES
—8 COLORS RGE TTL, 2 BD SYSTEM
MULTIBUS 1995.00
—THREE 1024 x 1024 VIDEO PLANES
—SINGLE BOARD
IBM PC 995.00
—1024 x 1024 PIXEL PLANE
—UP TO 8 VIDEO PLANES
SOFTWARE DRIVERS
HARDWARE ZOOM 1 to 16
SELECTABLE DISPLAY RESOLUTION
MULTI-GRAPHICS PROCESSORS AVAILABLE
start at*
C.S.D. INC.
PO Box 253
Sudbury, MA 01776
617-443-2750

Circle 503 on inquiry card.

Items Reviewed

Keyboard Companion PKAY Corporation POB 11463 Costa Mesa, CA 92627 (714) 548-2081	TRS-80 II Apple II IBM PC	$79.50 $77 $46
M-Drive Compupro Systems Oakland Airport, CA 94614-0355 (415) 562-0636	128K 256K	$1198 $2396
Quickcode Fox & Geller POB 1053 Teaneck, NJ 07666 (201) 837-0142		$295
Sage II Computer Sage Computer Technology Suite 4 35 North Edison Way Reno, NV 89502 (702) 322-6868		$3600
Semidisk Semidisk Systems POB GG Beaverton, OR 97075 (503) 642-3100	512K 1 megabyte	$1995 $2995
Speed Programming Package Digital Research POB 579 Pacific Grove, CA 93950 (408) 649-3896	CP/M-86	$250
T-Switch Inmac 2465 Augustine Dr. Santa Clara, CA 95051 (408) 727-1970	manual automatic	$147 $395

Book Reviewed

Introduction to the UCSD p-System by Charles W. Grant and Jon Butah, Berkeley, CA: Sybex, 1982, 300 pages, (415) 848-8233	$14.95 ($1.50 handling)

dual processor. CP/M-86 will enable the Compupro to run a number of programs that run on the IBM Personal Computer. On that score, Mark Dahmke has it running and says, "CP/M-86 makes the IBM PC a usable machine." I thought that a bit extreme; after all, a lot of people think the IBM PC is usable now. I'd probably have one if I hadn't become so furious over that horrid "European-standard" keyboard.

Mark agreed he'd probably overstated the case but added, "Going from MS-DOS to CP/M-86 is very much like going from TRS-DOS to CP/M. Once you've done it, you can never understand how you put up with the old system." I'll have to take his word for it, but not for long; one day I will get a PC, either by getting the right kind of S-100 video output

www.americanradiohistory.com

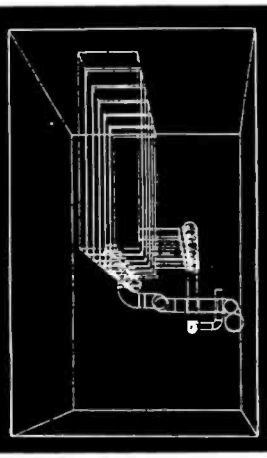

SOFTKITS

BOOKS
- with program listings in BASIC
- theory, equations, full explanation of how programs work

DISKS
- contain same programs as books
- unprotected and copyable
- use as building blocks for your own software

Data Plotting Software for Micros

This is a system of 18 programs which process and display data: pie charts, bar charts, stock market charts, histograms, 3D views of surfaces, log plots, curve fitting, data management, histograms and statistical analysis.

Programs are modular, menu driven, written in BASIC, fully explained and keyed to theory. Use them as-is or modify for custom applications.

Programs handle x, x-y, and x-y-z data files. Features include automatic scaling, axis marking and numbering, auto replot when data changes, and a special program called *LABELER* which places text and symbols over graphics using a moving cursor.

☐Book $28.50 ☐Apple disk $19.95 ☐IBMpc disk $19.95

Graphic Software for Microcomputers

This self-teaching guide will show you how to write your own 2 and 3 dimensional graphic software. It contains 61 fully documented programs in BASIC that illustrate various graphics operations and programming techniques.

Learn how to create 2 and 3 dimensional shapes, translate, rotate, scale, stretch, clip, remove hidden lines, shade, create perspective views, calculate and plot surface intersections, use a tablet to create 3 dimensional shapes and produce animation effects. Applications to science, engineering and business.

Named **"the best book available on microcomputer graphics"** by Creative Computing in Feb, 1982.

☐Book $21.95 ☐Apple disk $19.95 ☐IBMpc disk $19.95
☐TRS80 Color Tape $21.95

Sinclair Graphics

This self-teaching guide will show you how to write 2D and 3D graphics on the Sinclair 1000.

Sinclair Graphics is unique in that the author teaches graphics while writing useful and fascinating programs that do charting, graphing, games, simulation and computer art.

The level of mathematics is kept to a minimum yet most topics in computer graphics are covered.

Illustrative programs are applied to business, education, science, math and art. The presentation is light and informal while cleverly designed to teach graphics fast.

☐Book $14.95

IBMpc Graphics

This self-teaching guide will show you how to write your own 2 and 3 dimensional graphic software on the IBMpc. This is a special version of the popular **Graphic Software for Microcomputers** but it has been written especially for the IBMpc.

In addition to the topics covered in **Graphic Software**, this IBM version covers hardware requirements, separating text from graphics, and use of the pc's special graphics enhancements.

All programs are written in BASICA.

☐Book $24 ☐IBMpc disk $21

Structural Analysis Software for Micros

More than just a collection of stress programs, this package contains all the elements commonly found in sophisticated, modern CAD systems but on a scale more appropriate for micros.

You will be able to create a finite element mesh on the screen of your micro, rotate it in 3 dimensions, and store it on disk. Then recall the mesh from disk, recall a file of material properties and carry out a 3d truss or frame analysis.

Nonlinear and large deflection analyses is accomplished by an incremental solution strategy.

Other programs calculate combined stresses, area properties and plot deflected shapes of structures.

All program are modular, menu driven and written in BASIC.

☐ Book $39.95 ☐ Apple disk $24.95 ☐ IBMpc disk $24.95

Engineering Software for Micros

This package of 25 programs will show you how to write modern CAD software and use your micro for professional engineering work.

Emphasis is on combining computer graphics with engineering problem solving. Programs are included to interactively create engineering drawings, store them on disk, recall, update, merge, add physical properties and rotate in 3 dimensions. Other programs operate on drawings and perform matrix operations, Fourier analysis (spectra displayed graphically), mechanisms simulation, and optimization.

All programs are menu driven, written in BASIC and fully documented and keyed to theory and equations.

☐Book $28.50 ☐Apple disk $19.95 ☐IBMpc disk $19.95

To order, send check drawn on US bank, money order in US funds, **Visa** or **Mastercard** number with expiration date to **KERN PUBLICATIONS**, 190 Duck Hill Road, P.O. Box 1029B, Duxbury, Massachusetts 02332. Add $2 per book 4th class postage in US and Canada, $4 1st class or UPS in US; $4.50 1st class Canada; $12 air Europe and Central America; $18 air elsewhere.

Call (617)934-0445 for faster delivery.

KERN PUBLICATIONS

Circle 238 on inquiry card.

www.americanradiohistory.com

board for the Compupro; or by getting a Heath/Zenith Z-100, which seems to be a complete PC workalike; or by getting the PC itself and installing Jim Baen's Magic Keyboard reprogrammer. I have too many friends who are too happy with the PC for me to be a holdout forever.

Getting the PC won't solve my real problem, which was rather succinctly put by Professor Ben Singer of the University of Western Ontario. Professor Singer writes, "I am still looking for a metaprogram—one thing that you turn on—a giant file cum program that you can write with, retrieve, make notes, rewrite, find old things, but without menus, without leaving disks and programs and all of that."

I know precisely what he means: I'm looking for that program too. Right now we have text editors, databases, calculator programs, filecard programs, scratchnote programs, things to hold telephone numbers, spelling programs, etc., but they don't really work together. A few, like Wordstar with Spellstar and Datastar, try to work together, but they aren't really what we're looking for.

A possible approach is multitasking. I've never thought highly of multiuser operating systems for microcomputers; the computers are cheap enough that I think the goal ought to be one user, one processor. However, that doesn't mean the processor can't be doing more than one thing at a time. After all, while it's waiting for me to type in more text, it can be checking the spelling of the text I've already written or doing something useful like that. In theory, that would be fine; in practice, I suspect it would have side effects sufficiently distracting that I'd never use the capability.

On the other hand, I would greatly *love* to be able to access a desk calculator, retrieve telephone numbers and disk catalog information, see my calendar, and make log entries right from within my text editor without having to save my text and load a new program. I've even made notes on what I'd like such a program (or operating system) to do, and I've given it the name Executive Secretary. I'm told it wouldn't be all that difficult to write; that I can add some memory, and with a little hard work Executive Secretary can be made to run.

I'll believe it when I see it. That may not be as long as I think. Tony has a whole mess of stuff from Compupro and has been making mysterious noises about new upgrades to the operating system; while I keep hearing rumors of similar activities elsewhere in computerland. After all, Compupro already has its MPM-8/16 multitasking multiuser system, and although it's not quite what I want it's a step in the right direction. My own bet is that by the time the West Coast Computer Faire comes along in 1984 someone will have my Executive Secretary. I sure hope so.

Pascal Prime Project

The Pascal Prime Project mentioned last time continues. This is an attempt to get major compiler writers and publishers to agree on a set of "standard" extensions that fix Pascal's major defects. Carl Helmers will become chairman of the actual meeting to be held during the West Coast Computer Faire. We've heard from nearly all the major compiler writers and publishers, and they'll be there. Just how much agreement we'll get on Pascal extensions is still more guesswork than knowledge, but most of the compiler people seem anxious to cooperate.

Meanwhile, I've got a copy of Niklaus Wirth's report on Modula-2, his candidate for the language to remedy Pascal's defects and take its place. I haven't had a chance to study the book yet, but I don't think there's a Modula-2 compiler running on any system I'm likely to have; until I can run Modula-2, then, I'll continue to work on fixing Pascal. Last-minute flash: we now have Modula-2 working on the Sage. I like it a lot.

The Pascal Prime meeting will be open to the public; the structure will be a panel discussion of the invited participants, after which we'll take suggestions and questions from the floor. Since we don't have a lot of time, and we do hope to get some agreement on required Pascal extensions, we hope the questions and comments can be both relevant and short. And this column has gone on long enough. Next month, I hope, we can look at some equipment using 8087 "math" chips, plus lots more on the Sage and the new Lobo Max-80, and perhaps the new Epson QX-10 machine.■

★ INTRO SPECIAL ★
BASIS 108 Computer w/choice of drives with controller — Call
Micro Sci or Fourth w/64K or 128K completely assembled, tested and configured

★ SPECIAL ★ MICROSOFT
PREMIUM SYSTEM — $599

★ DISKETTE SPECIALS ★
Maxell MD-1 (Box of 10) — $ 32
Maxell 8" (Box of 10) — $ 41

MONITORS
NEC Hi-Res 12" Green — $129
NEC RGB 12" Color
Sanyo Monitors — Call
Amdek Monitors — Call
Electrohome — Call
USI Amber — $169
Televideo Terminals — Call

COMMUNICATIONS
Hayes Micromodem II — $275
Hayes Smart Modem — $235
Hayes Modem 1200 — Call
Microcom

COMMUNICAL INC. ™
1400 GRANT AVE. / NOVATO, CALIFORNIA 94947
IMMEDIATE DELIVERY CALL COLLECT 415-892-7139

BUY COMPUTERS FROM PEOPLE WHO KNOW HOW TO USE THEM.
SERVICES AVAILABLE: SOFTWARE APPLICATIONS • HARDWARE REQUIREMENTS
COMPUTER SECURITY • TELECOMMUNICATIONS • BUSINESS • SCHOOLS
CONSULTATION SERVICES.
Ask about our clients. All equipment tested prior to shipment.
If you don't see it, please ask us.

APPLE PERIPHERALS
Thunderclock — $125
Mountain Computer Prod. — Call
Videx Products — for
Microsoft Products — Best
Corvus Products — Prices
TG Joysticks/Paddles — Call
ABT Keypads — $ 99
System Saver Fan — $ 77
Saturn Systems
Axlon Products
FourthDimension — Call
Micro Sci Drives — Call
16-Bit Apple Card — Call
SVA Products
Peachtree Software

VISA master charge
Minimum order $100. Cashiers checks and money orders accepted. Add 3% for VISA or MC. Add 3% for shipping/insurance/handling. UPS. No COD. Prices subject to change. Call to verify. Orderhours 9-6 PST. Mon-Fri. Personal checks allow 20 days to clear. All products with full manufacturer's warranty, factory sealed. Calif. residents add 6% sales tax. Bank wires & P.O.s accepted. Retail prices may vary.
Apple is a registered trademark of Apple Computer, Inc. All brand names are registered trademarks

PRINTERS & INTERFACES
NEC 8023
NEC Spinwriter
Okidata Microline
IDS & C. Itoh
Anadex Products
CCS Interface Cards — Call
Qume and Diablo — for
EPSON w/Graftrax Plus — Best
Micro Buffer II — Prices
Grappler
IBM Software and Peripherals
Techmar STB Products
Atari Software

COMPUTER SYSTEMS
ALTOS Computers
ATARI 400 & 800
Basis 108 Computers
NEC PC8000 Computers
Sanyo Computers
T.I. Home Computer
Xerox 820-II Computers

APPLE BUSINESS SOFTWARE
Versaform — $299
Supercalc CP/M — $210
DB Master VER 3 — $169
The Last One
Format II — $275
Pro Easywriter Combo
Accounting Plus — Call
INVOICE PLUS — for
FMS-80, 81, 82 — Best
dBASE II — Prices
VISICORP Software

MICRO PRO
Wordstar
Supersort
Mail Merge
Data Star
Spell Star
Calc Star

Circle 84 on inquiry card.

www.americanradiohistory.com

YOU CAN MAKE A FORTUNE IN MICROS!

THE MICRO COMPUTER BUSINESS WILL GROW FROM $10 TO $100 BILLION IN THE NEXT EIGHT YEARS! ARE YOU READY TO CASH IN?

The **micro computer business** is predicted to grow from its present $10 billion to **$100 billion** before 1990! Imagine the possibilities this opens for you! No matter where you live, if you're starting up or presently in business, **no other industry offers you more opportunities!**

Now, finally, all the inside information you need to secure a prosperous future in this dynamic industry is available in **one place - THE COMPUTER ENTREPRENEUR MANUAL!** – An **immense** information source, compiled by our **inquisitive** research team, aided by a panel of **experts** and **business people** from **all areas** of the **computer industry!**

We present the inside story of **more than 100 lucrative computer businesses you can enter**, where you'll find the **real opportunities** for the eighties: from one man operations like **Programming Author, Word Processing Center** or **Consulting**, to **Systems House, Service Bureau, Computer Store etc!** Many at little or no investment! All the invaluable facts and figures: **How to start, Capital needs, Profit estimates and Margins, How to Sell and Market, How missing** technical or business experience **need not stand in your way, Source of Suppliers, etc!** Details that could take **years** to find out on your own!

We'll show you **inside tricks,** like how to **never again pay retail** for computer products and consumer electronics, **even for one item - right now,** while you're starting your business! How to get **free merchandise** and trade show **invitations, etc. This alone will more than pay** for the **manual!** You'll read **actual case histories** of other computer entrepreneurs, so you can **learn** from **their mistakes,** and **profit** from their **success stories! Where** you'll be **one year** from now depends on **your actions today!** Let us **show you how** to take the **first crucial steps!**

Order now and take **advantage** of our **limited introduction special, THE COMPUTER ENTREPRENEUR MANUAL,** and a **six month subscription to THE COMPUTER ENTREPRENEUR REPORT/NEWSLETTER** (so you're **always up-to-date** with the industry), **both** for **only $29.95! You must** be **convinced** on **how easy** you can **strike it rich** in the micro computer business - or you may **return** the manual for a **full refund** within thirty days! **USE OUR TOLL FREE NUMBER TO ORDER!**

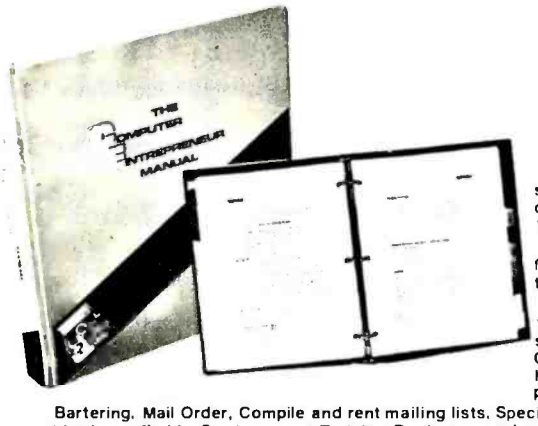

EVERYTHING YOU NEED TO KNOW TO SUCCEED IN THE COMPUTER BUSINESS IS ALL IN THIS MANUAL!

THE COMPUTER ENTREPRENEUR MANUAL has the answers to all your questions about selecting, starting and successfully running a computer business! There has never been such a comprehensive collection of know-how and information about this business in one place! All the facts you need to plan and acheive your goals in easy-to-follow, step-by-step instructions!

These are some of the 100-plus businesses covered in PART ONE of the manual, with the facts on How to start and run, Start-up Cost (Even how to operate on a shoestring), What profits to expect, Wholesale prices, Mark-ups, Suppliers, future outlook, case histories for each, etc:

Systems House, Software Author (who to sell to and who to avoid), Service Bureau, Software Publisher (How to find programs that sell, Word Processing Service, Consulting and Consultant Broker (use your skills or those of others, make $150 - $1000 a day!), The incredible Games Business, Computer Store (Franchises: Pro and Contra, or a low inventory store in your home!), OEM, Hardware Mfg, Data base and Teletext Service (big prospects!), Used Computers, Repairs, Rent-A-Computer, Promote Fests and Trade Shows, Turnkey Systems, Bartering, Mail Order, Compile and rent mailing lists, Specialized Data Headhunting and Temp Help Service, Tech Writer Shop, Custom Engineering, The highly profitable Seminars and Training Business, and many more!

Many new ideas and ground floor opportunities! Interviews and success stories on companies of all sizes! Privy info on the profits made: How some computer store operators net $100 - $250,000! Little known outfits that made their owners millionaires, one of these low-key companies, making simple boards, went from nil to $20,000,000 and 100 employees in four years! Programmers that make $300,000, Thousands of micro millionaires in the making, etc!

Whatever your goal is - **Silicon Valley Tycoon,** or just a **business at home - we guarantee** you'll find a business to suit you - **or your money back!**

PART TWO of the manual is loaded with the know-how and "streetfighting" savvy you need, both as a novice or business veteran, to get started, to stay and to prosper in the micro computer business! A goldmine of information in clear and easy-to-use instructions: How to prepare your Business Plan, Outside financing, The mistakes you must avoid, How to hire and manage employees, Incorporation (when, and how to do it cheaply), Surviving bad times, Record Keeping, how to estimate your market before you start, Use multiple locations to maximize profits, how to promote and stay steps ahead of the competition! How to get free advertising, free merchandise, free advice, Power negotiating with suppliers to double your profit margins, etc! Even how to keep a present job while starting a business part time!

Don't miss this opportunity to be part of this great industry - the next success story could be your own! Order the manual today! Part one and two, bound in a deluxe ring binder, where you can also collect our newsletter (free for six months with the manual - a $32.50 value!) - all for only $29.95!

THE COMPUTER ENTREPRENEUR NEWSLETTER – ALL THE LATEST INSIDE BUSINESS NEWS! NOW! SIX MONTHS FREE WITH YOUR MANUAL!

You're always attuned to the industry, and your manual kept up-to-date, with our newsletter! Each issue has the latest business news, ideas, new suppliers, our indispensible "watchdog" column on profits, discounts (don't miss mfg's promos, like recently, when top video monitor sold at $80 - that's half wholesale, one third of the retail price!), the competition, the big deals, etc! Feature stories with start-up info and case histories on new micro businesses!

You'll get invitations to trade shows and conventions, the usage of our advisory service and our discount buying service for your purchases!

You'll find many items in our newsletter that will save you the cost of your manual many times over!

CALL TOLL FREE!
CHARGE IT!
Credit Card Orders
(MC, VISA only)
accepted 24 hours/day
1-800-227-3800
Ask for extension 1135
In California call
1-800-792-0990

MasterCard VISA

Order by phone (Credit cards only), or use the coupon:

Mail to THE COMPUTER ENTREPRENEUR PUBLISHING CO.
PO BOX 456, Grand Central Station, New York, N.Y. 10163

Please send me THE COMPUTER ENTREPRENEUR MANUAL, and the six month free subscription to THE COMPUTER ENTREPRENEUR REPORT/NEWSLETTER. All for only $29.95, plus $3 for postage/handling (NY residents: add $2.64 for sales tax). If I decide not to keep the manual, I may return it within 30 days for a full refund.

NAME: _____

ADDRESS: _____

CITY, STATE, ZIP: _____

☐ Check or M.O. enclosed Charge to ☐ VISA ☐ MC

CARD# _____

Exp. Date: _____

SIGNATURE: _____

B0383

© 1982, THE COMPUTER ENTREPRENEUR

Circle 136 on inquiry card.

www.americanradiohistory.com

TRACK THE SPACE SHUTTLE ON AN APPLE? YES. WITH MICROSPEED!

At the Jet Propulsion Laboratory in Pasadena, NASA scientists have discovered the power of MicroSPEED. Using this remarkable hardware/software system with an Apple II, they produced a continuous graphic display of the Columbia's position relative to the earth during the second Shuttle mission. This enabled the JPL team to accurately follow the spacecraft in *real time*, and to precisely control its powerful sensors at critical points along the flight path.
Surprised that such a demanding project is possible on the Apple? So were JPL's engineers, and many others who have discovered . . .

THE MICROSPEED DIFFERENCE This extraordinary Language System exploits the real potential of the microcomputer for the first time. The difference between MicroSPEED and other programming languages is that with MicroSPEED, there is virtually *no limit* to what you can achieve. It may well be the ultimate language for the Apple II and III (and soon the IBM Personal Computer). MicroSPEED literally combines the performance of a *minicomputer* with an exhaustive set of user-friendly capabilities: hardware math processing, fast hi-res graphics and text, turtle graphics, print formating, two text editors, unlimited data types, and incredible FORTH extensibility—all at speeds up to 100 times faster than Basic.

USER-FRIENDLY, EASY-TO-LEARN Starting with simple commands that are comfortable even for non-programmers, MicroSPEED extends and builds, allowing you to create your own tailored application languages. The capability of your computer will grow exponentially, as you work in an active partnership with the machine, exploring and developing new problem-solving facilities—creating, correcting, refining your increasingly powerful system.

DEMANDING JOBS AT LOW COST MicroSPEED has been put to the test in fields as diverse as medicine, the stock market, oceanography, and the arts. In even the most challenging applications, MicroSPEED users have been unanimous in their praise of the System and manual. Typical comments are:

". . . we are more than pleased with MicroSPEED . . . I can't imagine using BASIC on any future applications."
Roger Guevremont, National Research Council of Canada.

"I continue to marvel at its versatility and power."
Carl R. Schramm, USCG Base, Kodiak, Alaska.

"Great! . . . A joy to use."
Henry Harris, Mission Design Manager
Jet Propulsion Laboratory

"If you plan to use a personal computer for <u>any</u> demanding task, then we built MicroSPEED for <u>you</u>."
Sam Cottrell, President of Applied Analytics.

MicroSPEED requires the Apple Computer with single disk. MicroSPEED II includes 2 MHz math processor. MicroSPEED II + includes 4 MHz math processor.

Applied Analytics Incorporated
8235 Penn-Randall Place
Upper Marlboro, Maryland 20772 (301) 420-0700

Please send me:

_____MicroSPEED II, $495.00 _____160 Page Manual, $15.00
_____MicroSPEED II +, $645.00 _____Detailed Information

Name: _____
Company: _____
Address: _____
City_____ State_____ Zip_____ Phone No. ( )_____

MicroSPEED™

APPLE IS A TRADEMARK OF APPLE COMPUTER, INC.

Circle 29 on Inquiry card.

www.americanradiohistory.com

Project Nebula

Keith Carlson
43 McDill Rd.
Bedford, MA 01730

In light of the enormous popularity of video games, it's not unusual that imitations of the most popular ones should spring up. After all, consumers spend $10 billion a year on video arcades, and manufacturers want a slice of the pie. So naturally I expected Project Nebula to be Radio Shack's version of Atari's blockbuster, Star Raiders. Not so. The two games have similarities, but after a thorough investigation I found that Project Nebula's differences in terms of rules and play make it a true original.

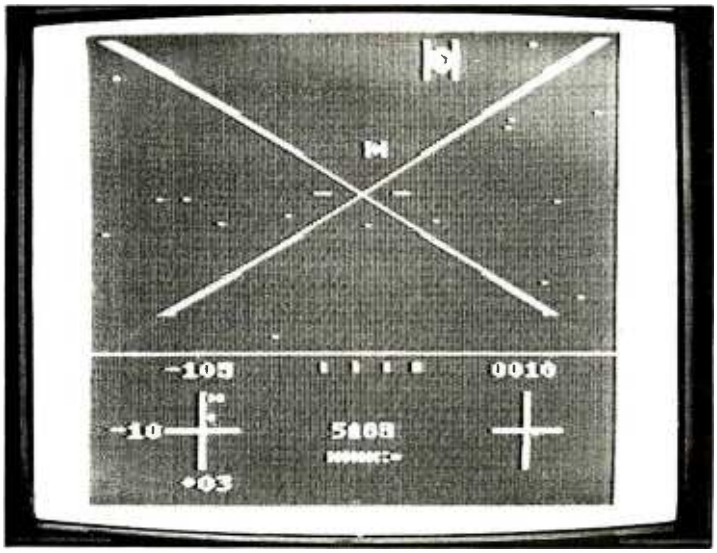

Photo 1: *The forward view from your scout vessel is shown in the upper section of the screen. Two Zykon craft have dodged one of your energy bolts (diagonal lines converging in center). At the bottom are your instruments showing direction, energy units, and score.*

Actually, Project Nebula for the TRS-80 Color Computer includes four games. Each game offers you 10 levels that increase in difficulty. Target practice is the first game, and you'll need it. The joystick control is sluggish and difficult to use in the beginning, and practice will help you get comfortable using it. Whether the unusual feel of the joystick was intentional or not, it detracts from the game. Target practice will also introduce you to the short-range sensors (both front and rear views) in the lower corners of the screen. In my initial experience with this practice, I discovered one of Project Nebula's most interesting aspects: the program maintains depth of field. In other words, if you have two enemy ships in your sights, you can only shoot the one in front. The second ship becomes vulnerable only when it is closer to you than the leftover debris from the enemy you just exploded. And the best part is that you gain all of this wonderful experience under the most ideal conditions; you can shoot the Zykons, but they can't shoot back!

Once you master the joysticks and the range sensors, you're ready for game two. It, too, is target practice, but with a big difference: now the Zykons are shooting at you. But don't fret too much; your ship is still safe. When you get a direct hit from an enemy bolt, the screen briefly fills with red @ signs, and the game continues. During this game, your other joystick is activated and it controls the forward speed of your craft. That feature isn't particularly useful in the first two games, but it becomes quite significant in subsequent games when you have to dock and refuel.

In the third game, you apply what you've been practicing. Now you have an entire quadrant to patrol, and with a press of the Z key, you view a multicolored map. To travel between sectors, you choose a sector and, by press-

www.americanradiohistory.com

At a Glance

Name
Project Nebula

Type
Game

Manufacturer
Tandy Corporation
1 Tandy Plaza
Fort Worth, TX 76102

Price
$39.95

Author
Robert Arnstein

Format
ROM cartridge

Language
6809 machine language

Computer Needed
TRS-80 Color Computer
(any configuration)

Additional Equipment
Two joysticks

Documentation
8-page manual

Audience
Arcade game players and
Star Wars fans

ing the H key, off you go into "hyperspace." When you move in hyperspace from one sector to another, the graphics resemble those in *Star Wars*. You will travel in hyperspace often. Every time the Zykons zap your ship, you lose energy units. To refuel, you must travel to a sector with a base, dock your ship, and get recharged.

Docking can be tricky. If you forget to reduce your speed at the right time, you will overshoot the base. You must set the ship's horizontal and vertical directions within a certain range, increase your speed until the base is in sight, and then decrease your speed to a specified point. When you are close enough to the base, you will receive a new power pack. Instructions for this procedure are included with the game, and with a little practice docking almost becomes easy.

The fourth and final game of the series pulls out all of the stops. Not only do you lose energy units when your ship is hit, but the accumulated hits begin to take their toll on your vessel. The type and level of damage the hits inflict remains unpredictable. You must remember to check the damage status report, which is displayed to the right of the quadrant map. When it's time for repairs, you must travel to a base.

At this point, finding a base can present quite a challenge. If your long-range sensors are damaged, you'll still be able to display the quadrant map, but the sectors will be randomly filled, making it impossible for you to tell which sector contains what; in my opinion, false information is more frustrating than no information at all. If you didn't memorize which sector has your home base, your only recourse is to conduct a costly sector-by-sector search, consuming large amounts of time and fuel. Trying to use damaged warp engines lands you in a random sector, no matter where you want to go. I find this more maddening than nonfunctional warp engines.

A few relatively minor things about Project Nebula bother me. Its terrible sound effects grated on my nerves and detracted from my ability to enjoy the game. As soon as I turned off the white noise, I had a much better time. Another quibble concerns the strategy for winning. If you're cautious, it's practically impossible to lose. An inexhaustible supply of bases for fuel and repair keep you from serious trouble, provided you memorize the location of your base. My last objection concerns the ending of the game. When you manage to eliminate every last Zykon, all you get is a mere congratulations. A rating based on the number of times you refueled combined with your score would be more gratifying. These problems, however, are trivial compared to Project Nebula's overall enjoyability.■

Legionnaire

Gregg Williams
Senior Editor

I have always had an extreme dislike for any game that reminds me of a legal contract. I've never liked war games for that reason. The rules always have the length, clarity, conciseness, and type size of the average insurance policy. I have also never been able to deal with war game maps (which are often the size of movie posters) and the number of playing pieces (anywhere from fifty to hundreds of units); I much prefer the playability of simple game mechanisms to complex ones. Because of all this, I've never been comfortable with war games, even though I've spent considerable hours playing them.

Avalon Hill's Legionnaire changes all that. The name of the game is misleading (for most people, it conjures up images of American Legion veterans trying to get to the Saturday night banquet alive) and the cover art is poor, but those are the only flaws in the presentation of an otherwise perfect solitaire game.

www.americanradiohistory.com

Legionnaire is the most recent game by Atari's Chris Crawford, easily the most innovative and talented person working on the Atari 400/800 computer today. Though his previous game, Eastern Front, solves many of the problems of war games, it retains several features that don't suit me—only one scenario with over 50 pieces on each side, a playing time of several hours, and a complexity that intimidates rather than challenges me. (Dyed-in-the-wool war gamers don't have these problems with the game, but I'm sure many feel as I do. I'm happy to report that Chris is working on an enhanced version of Eastern Front that has, among other things, various levels of complexity.)

Legionnaire is Crawford's latest war game, and many of its features improve on Eastern Front. For example, you can play games of varying complexity and length (the shortest is perhaps 10 minutes), you command between one and ten units, the computer automatically takes care of the enormous amount of calculation and record-keeping that conventional war games require, and—best of all—the game takes place in real time.

In Legionnaire, you are Caesar, and you command a force of between one and nine Roman legions. You play on a scrolling topographical map several screens high and wide (see photo 1), and your task is to defeat two barbarian tribes (played by the computer) that are challenging your power. When the game starts, you are asked how many legions you want to play with. You can choose a force of between one and ten legions, the first of which represents Caesar. (As the number of units you possess increases, you receive successively weaker units; the game is easier with smaller forces. Choose five units the first time you play.) You then choose one of twelve barbarian infantry tribes (listed in order of increasing strength and skill) and one of twelve barbarian cavalry tribes. Because each tribe is the same size as your force, you are always outnumbered by two to one. Your force and the two barbarian groups are placed randomly on the map, and the game is ready to begin.

When you press the Start button on the Atari keyboard, the barbarian units begin to move toward you. This is a very unsettling sight, especially compared with Eastern Front, in which you had conventional game turns and combat takes place only when you are ready. Not so in Legionnaire—the game is in real time and you have no time to spare. You use the joystick and a hollow-square cursor to give each unit up to eight orders, and each unit begins moving as soon as you have finished. The amount of time you need to execute these orders depends on the type of unit, its current characteristics, and the terrain; of course, cavalry units are faster than infantry units, but infantry units are stronger and harder to destroy. In general, units move once every 4 to 30 seconds, which gives you an idea of the pace of the game. The Caesar

(1a)

(1b)

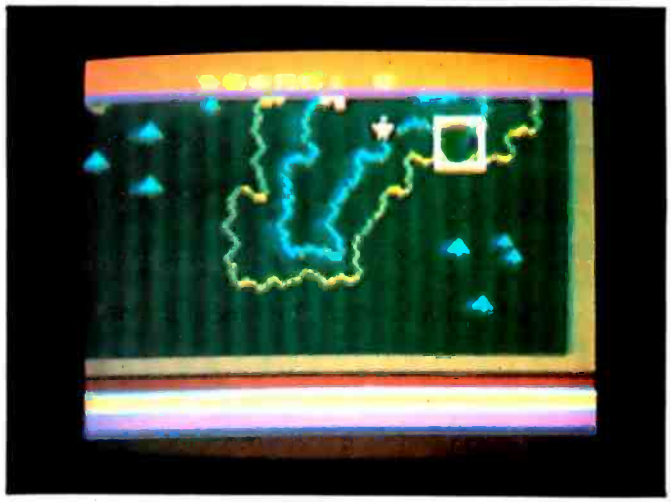

(1c)

Photo 1a–c: *Legionnaire in action. In this sequence, the cursor (yellow box) moves to the top edge of the screen (1a and 1b). When it needs to move further up, the background scrolls down (1c). You can see this by noting the locations of Caesar (the eagle-shaped pink unit) in each photo.*

www.americanradiohistory.com

At a Glance

Name
Legionnaire

Type
Arcade-style real-time military-strategy game

Manufacturer
Avalon Hill Microcomputer Games Inc.
4517 Harford Rd.
Baltimore, MD 21214

Price
$35

Computer
Atari 400 or 800 with cassette recorder, joysticks, and 16K bytes of memory

Author
Chris Crawford

Language
6502 machine language

Documentation
A 20-page manual with game instructions, strategy, an analysis of Roman and barbarian units, and some relevant history

Audience
Game players

unit is both strong and fast, but it has a special liability: if you lose it, you lose the game. When enemy units are adjacent and trying to occupy the same square, they begin to fight each other. Depending on the circumstances, a unit may retreat and/or lose men and swords; if it loses all of its swords, the unit dies and is removed from play.

The current status of each unit is indicated by the number of unwounded men in that unit and a number that reflects their combat strength at the moment due to fatigue and circumstances. In addition, the behavior of each Roman legion and each barbarian tribe is influenced by its overall temperament, which is described in the rulebook for Legionnaire. Such subtle information is of interest to only the experienced Legionnaire player, but it can mean the difference between defeat and victory when you are playing against the toughest opponents.

Of course, there is a lot of strategy to Legionnaire. Beginners should take the Roman troops to the top of the nearest hill and wait for the attack; that way the tired barbarians will have to walk uphill to attack rested Romans. You should also keep the cavalry units from being "pinned"; they should be free to execute a flank (side) or rear attack. See "More Legionnaire Tactics" for more information; you may want to play the game for a while before reading this box.

Conclusions

Legionnaire is a wonderful game that, for me, combines the graphics and movement of arcade games with the depth of strategy games. It also performs the valuable service of making the war game accessible to people who don't like the complexity and tedium of paper-and-cardboard war games. I also like the large number of gradations (in both playing time and skill level) it offers; Legionnaire has 1,440 variations (10 troop sizes times 12 cavalry opponents times 12 infantry opponents). Looking up combat results in a table (the procedure in most war games) has always struck me as a method of combat resolution that gives the players too much information on how combat is decided; seeing only the results of a battle, in real time, gives me a better simulation of war-making. Legionnaire has taught me more about military strategy and tactics than all the war games I've played to date.

Avalon Hill should be congratulated on such a strong game that extends its leadership in the war-gaming field to the microcomputer arena. I only wish that Avalon Hill had given Chris Crawford more prominent credit—if they don't know it by now, Chris's name sells games, and Legionnaire is just one example why. ■

More Legionnaire Tactics

- *One tactic for winning Legionnaire is to send one of your cavalry units toward the slower barbarian infantry units. If you are careful, you can get the infantry units to chase your cavalry, thus drawing them away from your main group. The remaining units (mostly infantry) can usually overcome the isolated barbarian cavalry; once that's done, use your cavalry to draw the barbarian infantry back to your main group. It will take some practice to use this tactic successfully.*
- *If you simply can't give your orders fast enough during a fierce battle, an undocumented feature of this game is to hit the Option key once (hitting it twice ends the game with your surrender). The game pauses (as with the Select key), but here you can give your units orders. Hit the Start key to continue the game. This is, strictly speaking, cheating, and it should be used only when necessary. However, the Huns (the most powerful barbarian cavalry) are impossible to beat, I'm told, so any method of winning is permitted here.*

www.americanradiohistory.com

Omega Race for the VIC-20

Stanley J. Wszola
Technical Editor

It isn't easy converting a well-known arcade game to the smaller screen and coarser graphics of a microcomputer. Invariably, the microcomputer display doesn't look as nice and the game's action isn't as fast as the arcade version. So I was pleasantly surprised when I saw Omega Race for the first time. The version for the Commodore VIC-20 is fast paced, has colorful graphics, and features good sound effects.

The game is relatively unchanged from the original Bally Midway version. At the start you are shown the race course, a rectangular-shaped field with a smaller rectangle in its middle. The smaller rectangle displays the number of ships you have left, your current score, and the previous high score. Populating the larger rectangle are a number of space mines and android-controlled ships. Each ship or mine is worth a certain number of points (see table 1). The object of the game is to maneuver your ship around the large rectangle and destroy the various space mines and android ships in your path.

The course is bounded on all sides by energy fields. If any ship hits the fields, it will bounce off like a billiard ball. The behavior of the ships can be used to your advantage in maneuvering around the course.

There are three varieties of android ships, each with its own behavior. The Death ships look and act like whirling dervishes as they careen around the course laying mines, firing wildly, and attempting to crash into your ship. They are the most dangerous of all because their seemingly random behavior makes them difficult to destroy. The Command ships, which move at a slower pace, are more deliberate in their firing and mine laying. They can be outgunned and outmaneuvered. The Droid ships are slower still, so they present a tempting target.

All the ships share one interesting characteristic: they can evolve into more advanced ships. A Droid ship can turn into a Command ship and a Command ship can become a Death ship. This metamorphosis usually occurs at the most inconvenient moment.

All of the action on the screen is accompanied by appropriate sound effects. The sounds of laser fire, exploding ships, and the victory fanfare at the end of a successful session add an interesting dimension to the game and reinforce its similarity to the arcade version.

Object	Point Value
Photon Mine	350
Vapor Mine	500
Droid Ship	1000
Command Ship	1500
Death Ship	2500

5000 bonus points are awarded for each Droid force you destroy. You receive an additional ship for each 40,000 points you score.

Table 1: *Point values for mines and android ships.*

At a Glance

Name
Omega Race

Type
One-player arcade-style game

Manufacturer
Commodore Business Machines Inc.
487 Devon Park Dr.
Wayne, PA 19087
(215) 687-9750

Price
$39.95

Format
Plug-in ROM cartridge

Language
6502 assembly language

Computer Needed
Commodore VIC-20 with game paddle or joystick

Documentation
A one-page instruction sheet

Audience
Arcade-game players of all ages

Game Controls

You can control your ship by means of a game paddle or joystick. Using the joystick, you can fire your ship's engines by pushing forward. Pushing the stick right or left turns the ship clockwise or counterclockwise, respectively. The button will fire your laser cannon. If you use

www.americanradiohistory.com

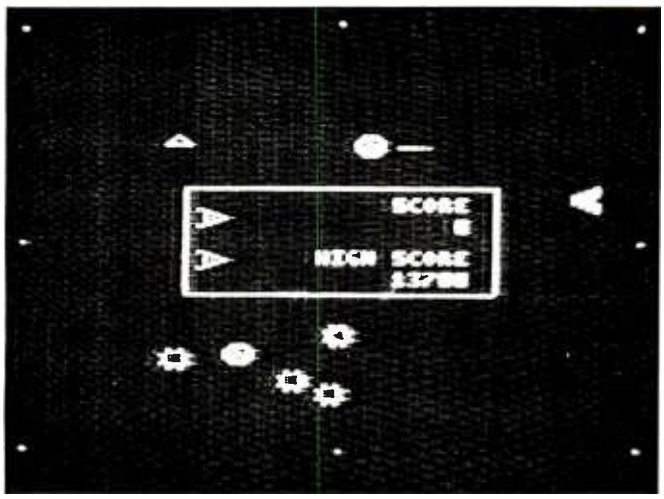

Photo 1: *An Omega Race game display. The game is played on a course bounded on all sides by energy fields. Your ship, at the left of the course, must destroy the Droid ships, the circular objects, and the mines (the single and double triangles).*

Key	Function
F1	Starts game, joystick, 3 ships
F2	Starts game, joystick, 5 ships
F3	Starts game, paddle, 3 ships
F4	Starts game, paddle, 5 ships
F5	Selects screen color, 8 choices
F7	Selects ship color, 8 choices

Table 2: *Game controls. The special function keys are used to select the various game options.*

a paddle, continuously holding down the Fire button will fire your engines. Rotating the paddle turns the ship left or right. Tapping the Fire button fires your laser.

The special function keys on the VIC-20 are used to select various game options (see table 2). You can select the background color, ship color, your choice of paddle or joystick, and the number of ships per turn.

Game Strategy

The fact that your ship will bounce off the energy fields surrounding the course can be used to your advantage. A good strategy is to position your ship at one end of the course. Point the ship straight up or down and fire your engines. The ship will bounce off the energy field at the top and bottom of the course. You can then pivot your ship to fire down the long axis of the course as you slowly drift from top to bottom. This gives you a clear shot at the approaching Droid ships, yet you can still duck around the corner of the small rectangle for cover.

In evaluating the game, I used a number of different brands of joysticks and paddles. I found that the joysticks worked best and that the Atari type was the most responsive. That's because the game is very sensitive to user commands. The Atari joystick had just the right feel, whereas other more responsive joysticks caused over-control problems.

I did develop one foolhardy method for increasing my score: letting the Droid ships evolve into Command ships, which are worth more points. However, this strategy could backfire because the Command ships also evolve into Death ships, which are much harder to hit.

It's hard to adequately describe Omega Race in words alone. Essentially a visual game, it demands concentration, fast reflexes, and a lot of body English. The use of the special function keys to select screen color, ship color, and choice of paddles or joystick is well thought out. This feature lets you modify the game according to your taste. Overall, Omega Race is a fun game that retains all the best characteristics of the arcade version. ■

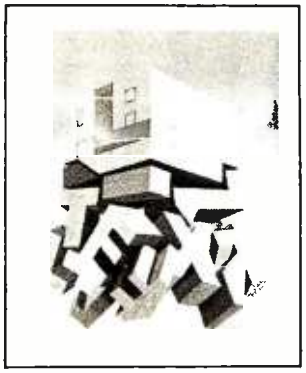

Through the Trap Door
March 1979—$35

Breaking the Sound Barrier
September 1977—$35

BYTE COVERS

The prints shown at left are beautiful Collector Edition Byte Covers, strictly limited to 750 prints each, and signed and numbered by the artist, Robert Tinney. Each print is 18 in. x 22 in., and is accompanied by its own Certificate of Authenticity. To order, use the coupon below. Visa and MasterCard orders may call 1-504-272-7266.

Please send _____ **Through the Trap Door** prints ($35), _____ **Breaking the Sound Barrier** prints ($35), or _____ sets of both prints ($55). I have included $3 per order shipping and handling ($8 overseas).

☐ I have enclosed check or money order

☐ Visa ☐ MasterCard

Card No. _____

Expires: _____

Name: _____

Address: _____

City: _____

State: _____ Zip: _____

Robert Tinney Graphics · 1864 N. Pamela Dr. · Baton Rouge, LA 70815

Circle 480 on inquiry card.

www.americanradiohistory.com

Complete Integrated Accounting System

Just plug it into your IBM® and run your business!

INTEGRATED ACCOUNTING SYSTEM
GENERAL LEDGER
ACCOUNTS RECEIVABLE
BILLING
INVENTORY
ACCOUNTS PAYABLE
PAYROLL
WORD PROCESSOR - Perfect Writer™
SPELLING CHECKER - Perfect Speller™
File Management System - Perfect Filer™
Electronic Spreadsheet - Perfect Calc™

The best business program package on the market . . . providing all the software and storage you ever wanted.

- All programs self-prompting & menue driven
- Completely integrated accounting system
- General Ledger includes a chart of accounts developed by a CPA
- Has been in use for four years
- High speed operation
- All software pre-installed on hard disk and ready to run. No more diskettes & tedious paper work
- Self-explanatory . . . easy to use
- All software & hardware fully guaranteed & supported

5 MB WINCHESTER DISK
plus ABOVE LISTED SOFTWARE
in ONE INTEGRATED PACKAGE

$2,995.00*

*Auxiliary Power Booster Required $195.

10 MB Model also available

Dealer Inquiries Invited

The Business Manager™

1420 E. Edinger Ave., Suite 115, Santa Ana, CA 92705

(714)836-3569

Circle 63 on inquiry card.

www.americanradiohistory.com

Monte Carlo Card

THE DISTINGUISHABLE CARD FOR THE DISCERNING USER.

FIVE FUNCTIONS ON A SINGLE BOARD

- ★ 64K to 1 Megabyte RAM Memory
- ★ ONE IBM Compatible Centronics Parallel Port
- ★ ONE IBM Compatible RS-232 Serial Port
- ★ Clock/Calendar (Perpetual Time Keeper)
- ★ Dual-Port Joystick Interface
- • Future Upgrade Option: Plug-On Direct Connect Modem
- • The Clock/Calendar has full alarm features and 1/100th second timing.

This card is the Ultimate IBM Peripheral.
See Your Local Dealer.

Available **NOW**

The Monte Carlo Card was ingeniously engineered to ensure that the maximum possible variety of the most sought-after features demanded by PC users was amassed upon a solitary board. Providing users with the best value for money, functionality, reliability, and flexibility, were our primary goals, which will enshrine the Monte Carlo Card as the premier expansion board for any PC user.

See Your Local Dealer *or* Call

I-C Magic +

GRAPHICS

- Full Color or B/W Tones
- HIRES and Medium Res.
- 4-Dot Sizes for Blow-ups

Reproduce Graphics from Screen to Dot Matrix Printer, Full Screen or Sub-Section

- Rotation, Color Hue Selection
- Shift PrtSc Graphic Dumps
- Color on Prism 132/80
- Operates on EPSON/NEC/C-ITOH PRISM/OKIDATA

SPOOLING

- Selectable buffer 1K to 64K
- Serial or Parallel
- True Background spooling at your fingertips
- Save processor time

SAVE MONEY

- Buffers all text and graphics

TERMINAL

- RS-232 Direct or Modem connection
- Full terminal capability on a chip! Printer Hardcopy/ Echo
- Full input/output buffering
- Background terminal features
- Easy for user customization

FOR YOUR IBM PC

IBM is a registered trademark of International Business Machines. Corp. MBI and I-C-Magic are trademarks of Microcomputer Business Industries, Corp.

MICROCOMPUTER BUSINESS INDUSTRIES CORPORATION

MBI

ADMINISTRATIVE OFFICES: 1019 8TH STREET, GOLDEN, COLORADO 80401 (U.S.A.)
TELEPHONE: (303) 279-8438 **TWX:** 910-934-0191

Circle 279 on inquiry card.

www.americanradiohistory.com

Monte Carlo Card

The distinguishable card for the discerning user

The only true FIVE function card
for the IBM Personal Computer

- 64K to 1 Megabyte of Memory
- ONE IBM Compatible Centronics Parallel Port
- ONE IBM Compatible Asynchronous Communications Port
- Clock/Calendar (Battery Backed) with Alarm Features
- Dual-Port Joystick Interface
- **Future Upgrade Option:**
  Direct Connect Plug-On Modem

Monte Carlo
MICROCOMPUTER
BUSINESS
INDUSTRIES
CORPORATION

ADMINISTRATIVE OFFICES: 1019 8TH STREET
TELEPHONE: (303) 279-8438

MBI

GOLDEN, COLORADO 80401 (U.S.A.)
TWX: 910-934-0191

www.americanradiohistory.com

Quickcode

Help arrives for users of dBASE II..

Adam B. Green
Softwarebanc Inc.
661 Massachusetts Ave.
Arlington, MA 02174

Imagine sitting in front of your computer and saying, "One accounts receivable program please—and hold the invoicing." Well, the state of the art in software hasn't reached quite that point yet, but a new breed of program generators is certainly working in that direction. One of these program generators is Quickcode from Fox & Geller, which generates programs to be used with dBASE II, the popular database program from Ashton-Tate.

Incorporating a database, query language, report writer, and full programming language into one package, dBASE II is an application-development program. It is used to perform information-processing tasks ranging from simple mailing lists to full accounting systems. The dBASE II language handles most of the "dirty work" of programming, such as disk-file and screen-handling operations. But even though it simplifies the job of writing custom programs, you need a general knowledge of programming techniques and syntax to make full use of the package.

Quickcode was developed to help two types of dBASE II users: businesspeople who lack the required programming background and consultants under pressure to produce programs in as short a time as possible. A Quickcode user with little computer background can describe a standard application, such as an inventory system, and Quickcode will produce a complete set of menu-driven programs in the dBASE II programming language. These programs are clearly written, well documented, and easily modified. More knowledgeable users can incorporate parts of these programs into their own applications. And the programs that are created do not require Quickcode to be present when they are running. If changes are required, Quickcode can be used to generate slightly different versions of the same programs.

I will analyze Quickcode with three criteria in mind: how easy it is for the user to describe the desired application, the length of computer time required for programs to be generated, and the quality of the generated programs. The limitations of Quickcode will also be discussed.

Describing the Application

How can a computer understand your billing problems when the salesperson who sold it to you couldn't? The answer is by using a special program. Some programmers call this the *human interface*, and it can be the most challenging aspect of writing a program generator.

One commonly used technique is to engage the user in a long, tedious series of questions and answers. Quickcode takes an alternate approach of letting the user fill in screens and, in effect, "paint a picture" of the application.

The first step is to use the Quickcode editor, which is similar to a limited word processor, to create a data-entry form. This *screen mask* is used for adding, displaying, and editing the data in generated programs. If you don't find the editor powerful enough, a word processor such as Wordstar can be used to create the screen mask. This

About the Author

Adam B. Green has written a book on dBASE II and teaches dBASE II classes around the country. Softwarebanc is a mail-order software company that specializes in business software.

www.americanradiohistory.com

Introducing the world's smallest terminal with built-in modem.

Take life easier. Don't get trapped with an over-priced hand-held computer you really can't use or read. Or a 60-pound terminal in a briefcase that's only good for creating a hernia. Take hold of the entire business world with one hand. With the **DATALINK 1000™**. The world's smallest and least expensive telecommunications terminal.

DATALINK 1000™ weighs less than a pound and it's the portable way to tap into limitless reservoirs of information—no matter where you are.

DATALINK 1000™ brings massive computer power as close as your nearest telephone. Just unplug the cord from your telephone handset and plug it into the **DATALINK 1000™**. With non-modular phones, use the pocket-size acoustic coupler. What could be simpler?

Use your fully portable **DATALINK 1000™** to transmit or receive data from your personal or business computer and any one of 500 existing information sources (we'll even throw in two free hours of on-line access to the powerful CompuServe™ information service). **DATALINK 1000™** is ready for action for stock quotes, airline schedules, electronic banking and mail, government and business reports, remote order entries, or a thousand-and-one other tasks.

Technically, **DATALINK 1000™** is a miniscule marvel. It packs a built-in modem, a phone jack, a choice of AC or battery operation, an easy-to-read 16-character fluorescent display screen, a full 240-character memory, and keyboard selection of two different display speeds (110 baud for easy screen reading, and 300 baud for output to a TV screen or high-speed printer).

Interested Distributors, Dealers and OEMs call: (408) 945-0500 for information on national sales, promotion, support, and pricing programs. Or write Axlon, Inc., 70 Daggett Drive, San Jose, CA 95134. For consumer information and ordering, call: 800-227-6703. In Calif: 800-632-7979.

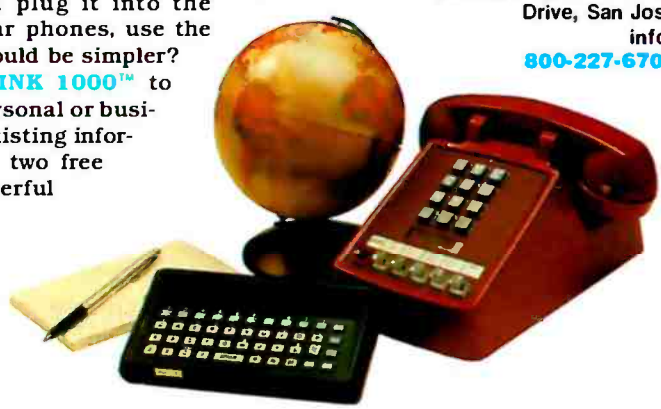

Because computers really should be called. Not carried.

AXLON®

National Distributors: • **B.A. PARGH CO.** Nashville, Tennessee (615) 361-3600 • **BYTE INDUSTRIES, INC.** Hayward, California (415) 783-8272 • **HIGH TECHNOLOGY** Florissant, Missouri (314) 838-6502 • **MARCEY INC.** Van Nuys, California (213) 994-7602 • **MICRO COMPUTER ELECTRONIC DIST.** Reading, Pennsylvania (215) 929-9484 • **MICRO D** Fountain Valley, California (714) 641-0205 • **NATIONAL MICRO WHOLESALE** Medford, Oregon (503) 773-1169 • **PMI MICRO WHOLESALERS** Fairfield, New Jersey (201) 227-8411 • **SKU** Berkeley, California (415) 848-0802 • **VIDEO THEATRE** Rochester, New York (716) 621-2003

Circle 42 on inquiry card.

www.americanradiohistory.com

IT'S FINALLY HAPPENED!

cAn-8o™

MICROPROCESSOR TRAINING KIT
WITH EPROM PROGRAMMER

cAn-8o™ ① TRAINING KIT WITH EPROM PROGRAMMER
② POWER SUPPLY
PERIPHERAL CARD
(③ ~ ⑦)
③ 8K RAM CARD
④ SOUND CARD
⑤ X'PRINTER CARD
⑥ 27xx TO 25xx ADAPTER
⑦ SPEECH CARD

At last a microprocessor package designed to give you what you want most; combined power and versatility. CAN-80 opens up a whole new dimension in the world of microcomputers.

Whether you are a hobbyist, teacher, student, or just plain like to dabble in computers, the CAN-80 is right for you.

But CAN-80 was also designed with the professional in mind. It has a built-in EPROM programmer for 2516, 2716, 2732, 2732A, 2764-also adaptable for 25xx series.

Speech processors are of course built-in along with all the other features.

Oh Yes, the CAN-80 is half the price of the so called competition.

PLUS & PLUS CO., LTD.

USA HANDWELL CORP.
4962 El Camino Real Ste 119 Los Altos, CA. 94022
Tel: (415) 9629265/6
Telex: 171947 HANDWELL LTOS

OTHERS PLUS & PLUS CO., LTD.
3/F, 271, Roosevelt Rd., Sec. 3, Taipei, Taiwan, R.O.C.
Cable: "SIGMALTD" Taipei
Telex: 21140 SIGMALTD
Tel: (02) 396-9900 (5 Lines)

Attention Overseas Buyers Other Than In The U.S.A.! Please make direct contact with our Taiwan Offices. Thanks!

At a Glance

Name
Quickcode

Type
Program generator for the dBASE II database language

Manufacturer
Fox & Geller
POB 1053
Teaneck, NJ 07666
(201) 837-0142

Price
$295

Format
5- or 8-inch floppy disk; can use hard disk for storage

Operating System
CP/M 2.2, MP/M, Turbodos

Computer System
8080, 8085, or Z80 computer with 48K bytes of usable RAM, a 24 by 80 cursor-addressable terminal, 180K bytes of disk storage, and the dBASE II database program

Documentation
137 pages, perfect bound

Audience
Users of dBASE II who need to produce programs quickly and those without any programming knowledge

can then be saved on a disk file in a nondocument mode (e.g., by using the "N" command in Wordstar), which can later be accessed by Quickcode to create the data-entry form.

All variables that will be used in the data-entry form (e.g., name and address in a mailing list) are defined in a second Quickcode screen. In this screen, the user describes each variable in terms of the following attributes: type of variable, length, default value, minimum value, and maximum value. The user can designate an error message to be displayed if data is entered outside the minimum and maximum range. It is also possible to specify which variables are to be kept in a dBASE II index file.

A third screen is used to specify which of the 12 possible types of programs are to be created (see table 1). The dBASE II language encourages the use of small, single-function modules, in keeping with the philosophy of structured programming. Quickcode follows this practice and creates a separate module for each major application function, as listed in table 1.

These three screens allow the user with little or no programming experience to describe an application and actually "see" how the finished programs will appear. The primary disadvantage is that Quickcode makes certain assumptions on several factors, such as the type of menus to be used and the overall structure of the application system.

Generating the Code

This is an area in which Quickcode is far superior to other program generators. The user simply presses the Escape key, and Quickcode is off and running. For example, if the user wants to create one of every possible type of module, up to 34K bytes of dBASE II programs are written in less than two minutes, and an empty database file can be created at the same time. On my double-

← Circle 348 on inquiry card.

www.americanradiohistory.com

COMPUTER WAREHOUSE

CALL TOLL FREE 1-800-528-1054

ATARI

Special 800 System
800 w/48K, recorder, Pac Man or Star Raiders, joysticks..... **Call**

Pac-Man Special
400 w/16K, 2 joysticks, Pac-Man **Call**

1200..... **Call**
800 (48K)..... **$525**
400..... **Call**
810 Disk Drive..... **$440**
850 Interface..... **$170**
410 Recorder..... **$75**
830 Modem..... **$155**

16K Memory..... **$60**
32K Memory..... **$75**

PRINTERS

Anadex
9620..... **$1445**
C-Itoh
F-10—Parallel..... **$1350**
F-10—Serial..... **$1350**
55CPS—Series..... **Call**
8510 Parallel..... **$425**
Computer International
Daisywriter 2000 w/16K..... **$1000**
Daisywriter 2000 w/48K..... **$1025**
Comrex
CR-1-S..... **$800**
CR-1-P..... **$775**
Datasouth
DS 180..... **$1175**
Diablo
620 RO wo/Tractors..... **$920**
630 RO wo/Tractors..... **$2050**
630KSR wo/Tractors..... **$2435**
IDS
Microprism 480..... **$525**
Epson
All models..... **Call**
NEC
PC-8023A..... **$465**
3510..... **$1375**
3550..... **$1835**
7710..... **$2050**
7720..... **$2425**
Okidata
All models..... **Call**
PMC
DMP-85..... **$410**
Smith-Corona
TP-1..... **$650**
Star Micronics
DP-8480S..... **$300**
DP-8480P..... **$295**
Gemini-10..... **Call**
Tally
1805/1802..... **$1455**
MT 160l w/tractors..... **$630**
MT 160L w/tractors..... **$725**
MT 180..... **Call**
Texas Instruments
810 Basic..... **$1260**

SPECIAL OF THE MONTH

Maxell Diskettes 5¼" 0 Sector (100) **$235**

SOFTWARE

	CP/M	IBM		CP/M	IBM
D Base II	$450	$450	Sorcim Supercalc	$225	$225
WordStar	$285	$285	Innovative		
MailMerge	$125	$125	Software T.I.M.	$425	$350
SpellStar	$195	$195	CBasic	$100	NA
Visi-Calc	NA	$195	Microsoft Basic 80	$265	NA
Easywriter II	NA	$275	WordStar, MailMerge,		
Spellguard	$225	$225	Spell Checker	$445	$445

PLEASE ADD $5 PER SOFTWARE ORDER FOR SHIPPING

DISK DRIVES

Percom
Atari S/D 1st Drive..... **$400**
Atari S/D 2nd Drive..... **$300**
Atari D/D 1st Drive..... **$525**
Atari D/D 2nd Drive..... **$330**
Rana (Drives for Apple)
Elite 1..... **$275**
Elite 2..... **$360**
Elite 3..... **$585**
Controller (w/Drive only)..... **$75**

MONITORS

Zenith
12" Green Screen..... **$115**
Amdek
Video 300..... **$145**
Color I..... **$300**
Color II..... **$645**
Color III..... **$390**
BMC
12" Green..... **$85**
13" Color..... **$265**
Comrex
13" Color Composite..... **$290**
13" RGB..... **$455**
NEC
JB 1201..... **$155**
JB 1260..... **$115**
USI
9" Amber..... **$130**
12" Amber..... **$150**

MODEMS

Hayes Smartmodem..... **$210**
Novation
CAT..... **$140**
D-CAT..... **$155**
Signalman
Mark I..... **$85**

VIDEO TERMINALS

Televideo
910..... **$570**
910 Plus..... **$570**
920..... **$735**
925..... **$730**
950..... **$915**
Zenith
Z-19..... **$680**
ZT-1..... **$550**

COMPUTERS

Altos
ACS 8000-15..... **$3742**
Series 15D..... **$2125**
Series 5-5D..... **$4240**
Eagle..... **$2350**
NEC
8001..... **$730**
8012..... **$470**
8031..... **$730**
Northstar
Advantage..... **$2800**
Advantage w/5MB..... **$3900**
Horizon II 64K QD..... **$2625**
Sanyo
MBC-1000 w/WordStar, CalcStar, S-Basic, CPM®..... **Call**
Above w/2 Drives..... **Call**
MBC-2000..... **Call**
Televideo Systems
TS-802..... **$2599**
TS-802H..... **$4450**
Zenith
Z-120..... **Call**
Z-110..... **Call**

COMMODORE

64..... **Call**

COMPUTER WAREHOUSE
2222 E. Indian School Rd.
Phoenix, Arizona 85016

Order Line: 1-800-528-1054 Other Information: 602-954-6109
Order Line Hours: Mon.-Fri. 10-5 MST Saturday 9-1 MST

Prices reflect 3% to 5% cash discount. Product shipped in factory cartons with manufacturer's warranty. Please add $8.00 per order for shipping.
Prices & availability subject to change without notice. Send cashier's check or money order...all other checks will delay shipping two weeks.

www.americanradiohistory.com

SNA
X.25

Systems Strategies/Communications Division
Specialists in Data Communications Software

225 West 34th Street
New York, New York 10001
(212) 279-8400

- Custom software to allow your product to interface networks and emulate other vendors equipment
- SNA, X.25, BSC software to communications compatible product developers for a more timely and cost effective entry into the marketplace
- Software that is utilized by computer and terminal manufacturers. Target processors have included Zilog Z-80, Z-8000, Intel 8086
- Close contact with your engineers to adapt our software to your hardware
- Software in 'C', Pascal and Assembler
- Microcomputer systems development

WINCHESTER DISK SYSTEM.

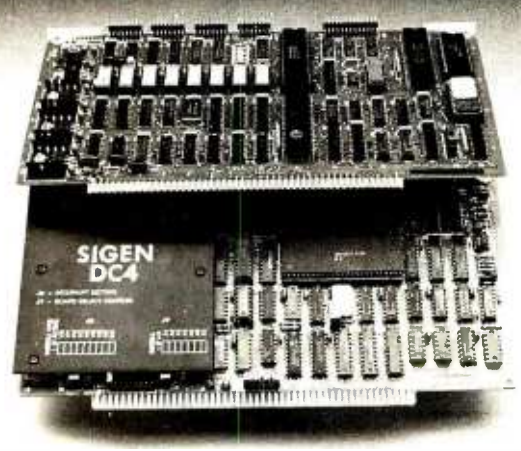

A Complete Winchester/Floppy Disk System.

- Disk controller with 4 ports; supports wide range of drives; 5¼" and 8" drives can be on same cable.
- Z80 CPU includes 4MHz, 64KRAM, 2 serial I/O, 1 parallel, CTC.
- Supports 10MB streaming tape. CP/M® and BIOS included.
- Package price: $1,195.00.
  May be purchased separately. Disk and streaming drives available.

SIGEN Corporation

1800 Wyatt Dr., #6, Santa Clara, CA 95054
Contact: Allen Hauptman, **408/988-2527**

CP/M is a trademark of Digital Research.

Programs:

ADD	Add records to a data file
CMD	Main menu program for entire system
ED	Edit an existing record
FAU	Store default values into data-entry variables
GET	Search for a record by index value
GO	Create index files for the database
IO	Format information for the data-entry screen
LBL	Print mailing labels from the data file
OUT	Format information for printing a single data record
RPT	Run reports created with dBASE II report writer
VAL	Perform validation of data entered in ADD
WS	Transfer dBASE II data into Wordstar/Mailmerge format

Data Files:

DBF	Database file for storing information
NDX	Index file for rapid retrieval and organizing data

Table 1: *A list of the various types of program modules that can be generated by Quickcode in the dBASE II programming language.*

density 8-inch floppy disks, the generation step is actually performed in less time than it takes the CP/M utility program PIP to copy the same amount of code from one disk to another. Of course, this time might vary depending on the hardware used.

The speed of Quickcode should have a noticeable effect on the entire program-development process. The cycle of writing, testing, and modifying programs becomes a matter of hours rather than days. If you don't like a particular screen—or want to add another variable—simply start up Quickcode, and within minutes a new version of the system is created.

The Quality of the Programs

While program quality is often a matter of personal taste, some objective measurements are available. The factors considered in this review are modularity, standard use of variable names, internal documentation, and performance.

Because Quickcode writes all its code as small modules, the user can maintain control over the finished product by specifying which of these "building blocks" should be created. A nonprogrammer could generate a set of modules for a completely menu-driven application system, while a consultant might prefer to generate only a few functions and manually code the rest. To encourage the latter practice among professional programmers, Fox & Geller does not require any licensing fee for resale of its generated code.

To ensure compatibility among all these modules, Quickcode uses standard naming conventions for its variables. This allows modules created for separate applications to be "hooked" together. For example, an inventory system might be added to an accounts receivable system created several months before. Use of standard naming conventions also simplifies the task of integrating Quick-

 Circle 391 on inquiry card.

www.americanradiohistory.com

code modules with handwritten code.

The task of including internal documentation in programs is the bane of all programmers. This mechanical task has now been taken over by Quickcode. The programs it writes all contain detailed comments in English, which not only eases the job of modifying the generated code, but also assists the less-experienced user in learning the dBASE II language.

Evaluating the performance of any written material often becomes the personal judgment of an individual's style. Two conflicting styles of programming are in common practice. One style involves the use of all possible tricks and shortcuts in a language in order to optimize the speed of the running programs. Advocates of this method (often C and FORTH programmers) call it *tight programming*. Critics often refer to it as *write-only code*, because of the difficulty in reading it at a later date. Quickcode takes the opposite approach and generates clean, standard code. The resulting programs could run faster if shortcuts were taken, and some programmers might prefer to modify the code to take advantage of a personal speedup technique. I prefer a slow program that I can later enhance, instead of a fast but cryptic mess.

One area of performance where Quickcode clearly shines is in the elimination of programming bugs. A great deal of programming time is usually spent tracking down and removing these pesky critters. Because the code is being generated from prewritten text stored within the Quickcode program, syntax errors and improper use of commands are eliminated.

Overall, I would say that the quality of the programs produced by Quickcode is equal to that of a very methodical programmer with more than one year's experience with dBASE II.

Documentation

The 130-page manual that accompanies Quickcode is fairly easy to follow. A preliminary tutorial section is designed for overly anxious users who need their applications finished two weeks before buying the product. This is followed by detailed instructions on each section of the program.

Although there is a table of contents, the manual lacks an index. I hope that Fox & Geller finds the time to add one, even though it might seem to fly in the face of tradition.

The manual also needs more detailed application examples. Although the basic operation of Quickcode is clearly described, a sample inventory or accounts payable system would be helpful.

Limitations

While I am obviously pleased with most aspects of Quickcode, it has some limitations that should be made clear. A major weakness is the inability to create programs that access more than one data file. Also, some Fox & Geller advertisements claim that a complete accounting system could be "knocked out in a weekend." Typically, accounting systems consist of several modules that share data files. For example, a receivable module must be able to access the files of an inventory module. And although adequate inventory and receivable systems could be written with Quickcode, the necessary integration of the two systems would require a fair amount of programming knowledge. The other major weakness is the lack of any sophisticated report-writing facilities. I hope that Fox & Geller will be able to address these limitations in a later version.

Conclusions

Quickcode is a well-written, easy-to-use program generator for the dBASE II programming language, which allows the user to describe an application by simply filling in screens.

A large amount of code (more than 30K bytes) can be generated in less than two minutes. The code produced is modular, easily modified, and runs at an acceptable speed.

The manual included with the program is clearly written, but lacks an index and sufficient application examples. The limitations of Quickcode include the inability to access more than one data file and a weakness in the report-writing functions.

The major audiences for Quickcode are dBASE II users with little programming background and programmers who need to produce large amounts of standard code quickly. ■

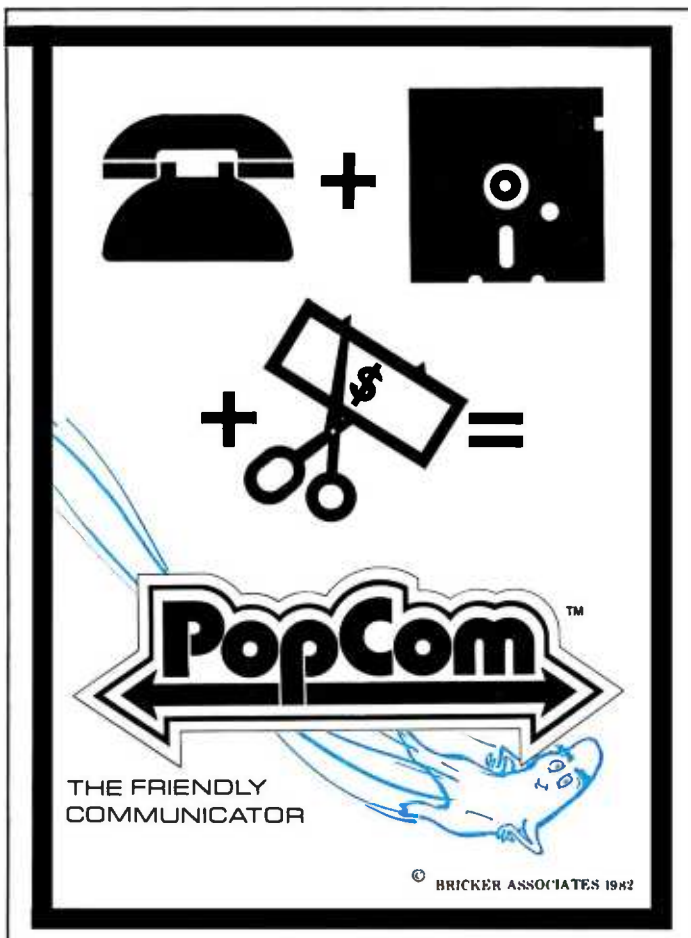

www.americanradiohistory.com

A Faster Binary Search

An important technique results in faster-running applications programs and shorter response times.

Dr. L. E. Larson
General Technology Division
IBM Corporation
Endicott, NY 13760

Most applications of computer processing involve searching data tables of one form or another. The process is used in compilers, language interpreters, command processors, assemblers, database processors, and word processors. The regularity with which table searching is used makes the choice of searching techniques vital. A reduction in search time usually results in faster-running applications programs and shorter response times.

Although many techniques exist for searching tables in storage and on external media, the three principal ones are linear, series, and binary. The linear search examines each item, starting with the first, and proceeds sequentially. The series search, based on a mathematical series such as the power series or the Fibonacci series, works by subdividing the table of data in accordance with successive smaller numbers in the series. The binary search divides the table of data into two parts, rejecting one part and repeating the process on the other part until the item in question is found. ("Hashing" can be used to search by address calculation, but it sometimes yields the same key for more than one different field, which often reduces it to one of the three principal techniques.)

A discussion of a method of enhancing the binary search would not be complete without some background on the binary search itself. The binary search is appropriate for tables whose entries are in some order. Based on the concept of dividing a large problem into smaller parts, this technique involves dividing a list into two parts of equal size. None of the entries in one part meets the search criteria value (low), while an entry in the other part does meet that value (not low). The binary search divides the not-low part again, and the process of division continues until only one entry remains. The remaining entry, of course, matches the search item.

Usually, the midpoint of a table is computed by dividing the sum of the left and right indexes by two. Initial-

Glossary

Field: *a part of a record that holds a particular kind of data. Examples: name field, telephone number field, social-security number field, and zip code field.*

Hash duplication: *the replacement of more than one unique original key by the same key after hashing. Example: in hashing by division, two different numbers divided by the same divisor may yield different quotients but the same remainder, hence the same key.*

Hashing: *transforming a key field into a more compact and more easily manipulated form to increase the speed of sorting or searching. Example: if the social-security number is the original key field, a new key might be calculated by dividing the social-security number in each record by 10,000 and using the remainder as the new key.*

Key: *the field of a record that is compared to a test value in order to identify or locate a record. Example: if records are searched for a name, the name field is the key.*

Record: *a group of related data items that is treated as a unit; when there is more than one record, each record contains the same type of item at corresponding positions. Example: a record might contain someone's name, telephone number, social-security number, and zip code.*

Circle 420 on inquiry card.

www.americanradiohistory.com

complete with
controller & cartridge

FIRST FROM TECMAR

NEW REMOVABLE CARTRIDGE WINCHESTER

This is the breakthrough in storage that IBM PC people have been waiting for, as Tecmar engineering keeps you moving ahead.

- the new SyQuest 5 Megabyte removable cartridge Winchester disk drive
- complete, easily installed in IBM PC or available in IBM-compatible Tecmar expansion chassis
- new Tecmar superspeed controller
- Tecmar disk sharing for up to 4 IBM PCs
- your best solution for mass storage, and the most sensible back-up system available.

We believe this is the future in storage because we have proved its reliability and its advantages. The new removable cartridge gives you unlimited memory at a lower price tag than the basic Winchester at comparable speed.

$1795 complete with controller & cartridge

AVAILABLE NOW AT YOUR TECMAR DEALER

Write for new Tecmar information kit.

TECMAR
Personal Computer Products Division
23600 Mercantile Road
Cleveland, Ohio 44122
Phone 216-464-7410/Telex 241735

TECMAR COMPATIBILITY, VERSATILITY, RELIABILITY, AFFORDABILITY, RESPONDABILITY
The first and only complete line of fully compatible expansion options for IBM PCs, including every type of disk drive

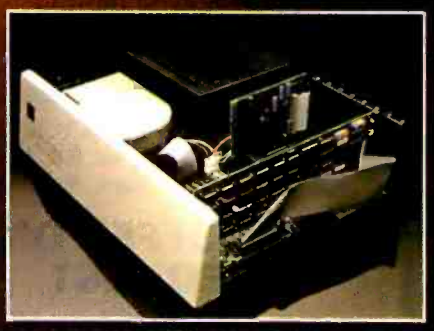

NEW SHARED WINCHESTER PC-MATE™
Our new GT subsystem upgrades our original with 3 times faster speed, sharing for up to 4 IBM PCs . . . Controller Board available for upgrade on trade-in.

PC-MATE™ FLOPPY
Controller Board will handle 5¼" and 8" disks. Winchesters can be installed in our floppy subsystem cabinet.

www.americanradiohistory.com



Figure 1: *A search tree representing the binary-search process. The search begins at the top with the root node and proceeds down the tree to the leaf or terminal nodes. This process continues until the search argument is found or the table is exhausted.*

ly, the left and right indexes are the two extremes of the table. Comparing the search argument to the table entry at the midpoint determines whether the right or left index is replaced. The process continues until the matching entry is found or the table has been reduced to an empty state.

In the quest for enhancement, many different techniques exist for analyzing the process time of an algorithm. In searching, for example, the usual technique is to examine the number of comparisons required to locate an item in a table. Because my enhancement of the binary-search algorithm involves moving a portion of the midpoint-calculation code after a comparison is made, the analysis that I will present focuses on the number of comparisons and the number of required iterations of the midpoint-calculation code.

The binary-search process I devised is a traversal of an implicitly defined binary-search tree that is a complete binary tree as well. Like all traversals, it begins with the root node and proceeds down the tree to the leaf or terminal node. Figure 1 shows a representation of the search process as a search tree.

In the binary-search process, if it takes one unit of time to locate the third element in a table of seven entries, then the computation time necessary to locate the third entry does not double until the table is expanded to 31 entries. In other words, the binary search resembles a logarithmic pattern despite the use of the division process. It is this logarithmic performance that has led to the false conclusion that little can be done to improve the binary search.

A long-standing rule of thumb about random access to data files is that 80 percent of the activity is concerned with only 20 percent of the file. The implication is that after a data argument has been seen, the probability of seeing it on the next request is 3.25 times that for the total random case.

Files and tables share an important characteristic: both can be viewed as linear-ordered representations of the records to be inspected and retrieved. Extending the 80/20 rule to tables, then, suggests a means for improving the performance of a binary search.

Analysis of Enhancement

Figure 2 shows the implicit tree used for the enhanced-search process. In this example, a prior search returned the eighth entry of the table (P represents the node returned by a

Text continued on page 268

Maryman INDUSTRIES, INC.

In Texas Orders Questions & Answers 1-713-392-0747

22511 Katy Freeway Katy (Houston) Texas 77450

To Order 1-800-231-3680 800-231-3681

SAVE BIG DOLLARS ON ALL TRS-80® HARDWARE & SOFTWARE

TRS-80® BY RADIO SHACK. Brand new in cartons delivered. Save state sales tax. Texas residents add only 5% sales tax. Open Mon.-Fri. 9-6, Sat. 9-1. We pay freight and insurance. Come by and see us. Call us for a reference in or near your city. Ref: Farmers State Bank, Brookshire, Texas.

WE OFFER ON REQUEST

- Federal Express (Overnight Delivery) ☑
- Houston Intercontinental Airport Delivery (Same Day) ☑
- U.P.S. BLUE (Every Day) ☑
- References from people who have brought computers from us probably in your city. We have thousands of satisfied customers. WE WILL NOT BE UNDERSOLD! ☑

ED McMANUS

MasterCard

No Tax on Out of Texas Shipments!

Save 10% 15% OR MORE

Telex 77-4132 (Fleks Hou)

® TRS-80 is a Registered Trademark of Tandy Corp

WE ALWAYS OFFER

- ☑ NO extra charge for Mastar Card or Visa.
- ☑ We use Direct Freight Lines. No long waits.
- ☑ We always pay the freight and insurance
- ☑ Toll free order number
- ☑ Our capability to go to the giant TRS-80® Computer warehouse 5 hours away, in Ft. Worth, Texas, to keep *you* in stock.

JOE McMANUS

VISA

Circle 259 on inquiry card.

www.americanradiohistory.com

Quark turns your Apple III into an orchard.

You can get the most out of your Apple* III with office automation software from Quark. In fact, our integrated line of technically advanced products can dramatically increase your system's capabilities.

And all Quark programs combine this leading-edge technology with a singular innovation: simplicity of operation. Because we think software should present challenges to the developer, not to the user.

This approach to product design is clearly evident in our Word Juggler™ word processor. And since you can enhance Word Juggler with special accessory programs, you'll have ample opportunities to discover that productivity is not merely a cliché.

Just add our Lexicheck™ spelling checker, for instance. Or our new Terminus™ communications program; ideal for interfacing Apple IIIs. And perfect for electronic mail applications.

Your dealer is waiting to give you a comprehensive demonstration of our complete word processing system. Plus other Quark products, too, such as our Catalyst™ hard disk boot, Discourse™ software spooler, and more. See him today. You'll quickly find that Quark really does turn your Apple III into an orchard. So all you'll have to do is shake the trees.

Quark™ INCORPORATED

2525 West Evans, Suite 220
Denver, CO 80219

*Apple is a registered trademark of Apple Computer, Inc.

Circle 368 on Inquiry card.

www.americanradiohistory.com

INTRODUCING 1-2-3™. IT'LL HAVE YOUR IBM/PC JUMPING THROUGH HOOPS.

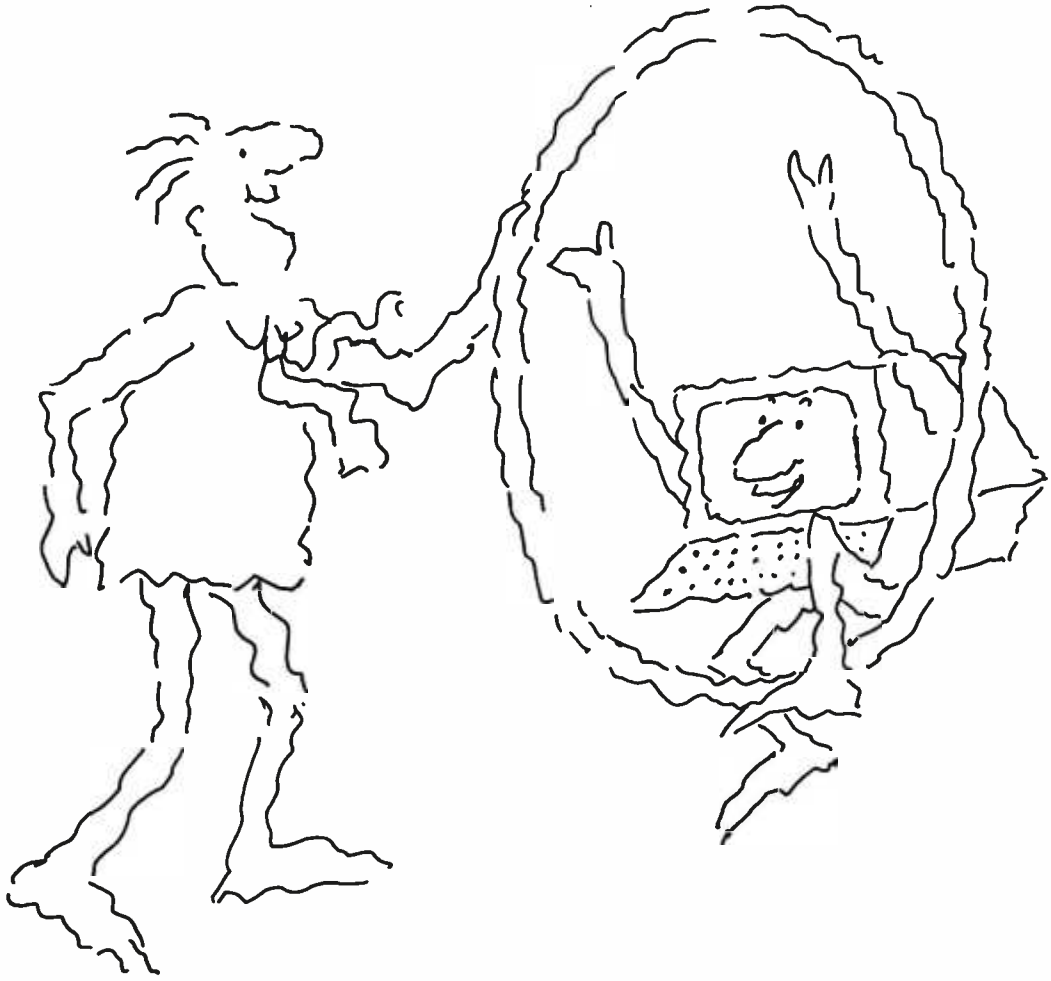

www.americanradiohistory.com

Meet 1-2-3 – the remarkable new software package that puts more raw power at your fingertips than anything yet created for the IBM PC. 1-2-3 actually combines information management, spreadsheet, and graphing in one program that can perform all three functions interchangeably and instantly at the touch of a key. That's power.

To explain: since 1-2-3's information management, spreadsheet and graphing functions reside in memory simultaneously, you can go from retrieval to spreadsheet calculation to graphing instantly, just by pressing a few keys. So now you can experiment and recalculate and look at data in an endless variety of ways. As fast as your mind can think up new possibilities. There's no lag between you and the computer. And that's a new kind of power – power that's greater than the sum of its programs.

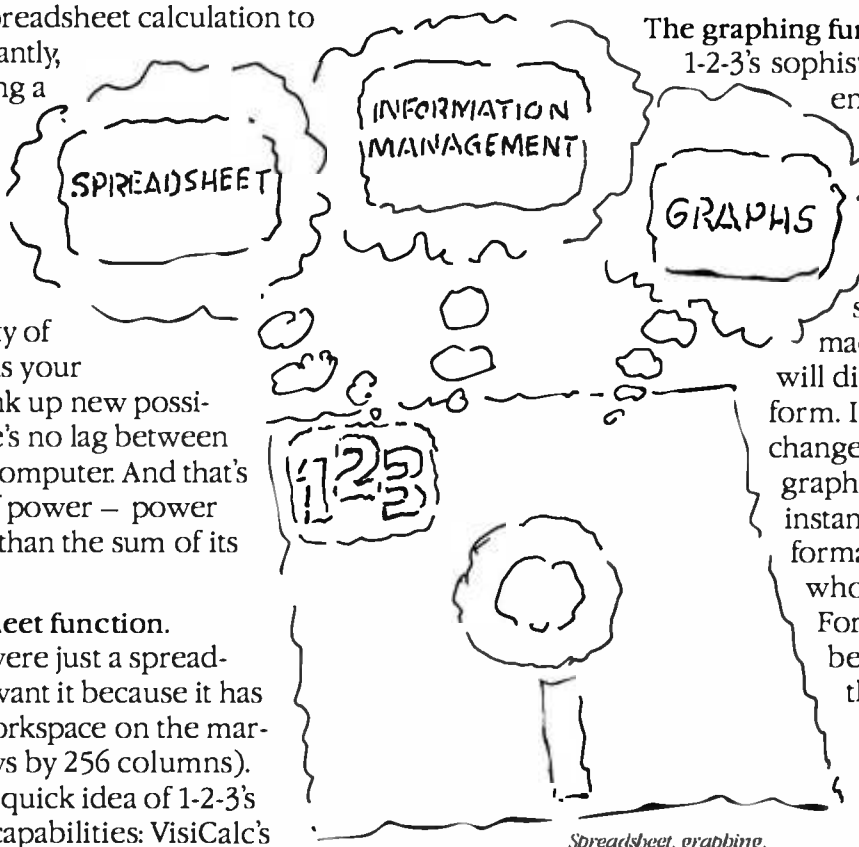

Spreadsheet, graphing, information management all-in-one.

The spreadsheet function.

If 1-2-3 were just a spreadsheet, you'd want it because it has the largest workspace on the market (2048 rows by 256 columns). To give you a quick idea of 1-2-3's spreadsheet capabilities: VisiCalc's spreadsheet for the IBM PC offers 15 arithmetic, logical and relational operators, 28 functions and 32 spreadsheet-related commands. 1-2-3 has 15 operators, 41 functions and 66 commands. And if you include data base and graphing commands, it actually has 110!

In addition, 1-2-3 is up to 50 times as fast as established spreadsheets. With all the features you've ever seen on spreadsheets. 1-2-3 also gives you the capability to develop customized applications (with 26 macro keys) and lets you perform repetitive tasks automatically with one keystroke. If 1-2-3 were just a spreadsheet, it would be a very powerful tool. But it's much, much more.

The information management function.

Add to 1-2-3's spreadsheet a selective information management function, and the power curve rises at an awesome rate. Particularly since 1-2-3's information management capability reads files from other programs such as WordStar, VisiCalc and dBase II. So you can accumulate information on a limitless variety of topics and extract all or pieces of it for instant spreadsheet analysis. Unheard of before. Specific 1-2-3 information management features include sorting with primary and secondary keys. Retrieval using up to 32 criteria. 1-2-3 performs statistical functions such as mean, count, standard deviation and variance. It can produce histograms on part or all of the data base. 1-2-3 also allows for the maintenance of multiple data bases and multiple criteria.

The graphing function.

1-2-3's sophisticated graphing commands enable you to create graphs of up to six variables using information already on the spreadsheet. And have it on screen in less than two seconds! Once you've made a graph, three keystrokes will display it in a different form. If data on the spreadsheet changes, you can display a revised graph with one keystroke. This instant relationship of one format to another opens up a whole new application area. For the first time graphics can be used as a "what if" thinking tool!

To fully understand just how much power 1-2-3 adds to the personal computer you'll want to go to your nearby 1-2-3 dealer for a full demonstration. For his name and address (and more information if you want it) call 1-800-343-5414.

1-2-3™

© Lotus Development Corporation; Cambridge, MA 02138, (617) 492-7171. All rights reserved.

WordStar is a registered trademark of MicroPro Inc. VisiCalc is a registered trademark of VisiCorp. dBase II is a registered trademark of Ashton-Tate. 1-2-3 and Lotus are trademarks of Lotus Development Corporation.

Circle 491 on Inquiry card.

www.americanradiohistory.com

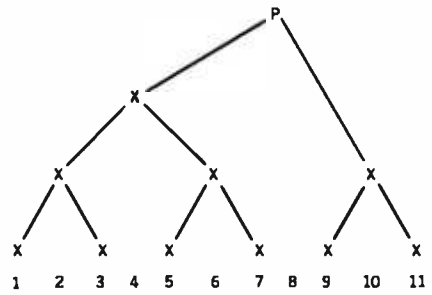

Figure 2: *A search tree for the enhanced binary search representing a table of 11 elements. A prior search returned the element shown as node P. The subtrees branching down from P represent the search paths to be followed after comparing the search argument with P. Although the complete search tree extends to a depth of 4, the enhanced binary search has two trees to consider: the tree shown on the left has a depth of 3, and the one on the right has a depth of 2. The reduction in depth indicates a reduction in the number of iterations required by the search.*

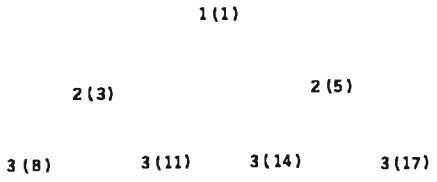

Figure 3: *A search tree showing the accumulated weight of iterations required to inspect every element in a binary search of seven elements. Numbers preceding parentheses identify the depth; numbers within parentheses show the cumulative inspections. If each of the seven elements is equally likely to match the search argument, the binary search would require an average of 2.43 inspections to find the match.*

	Comparisons by Element				Iterations by Element			
	1	2	3	4	1	2	3	4
Case 1	1	3	2	3	0	2	1	2
Case 2	2	1	2	3	1	0	1	2
Case 3	2	3	1	2	1	2	0	1
Case 4	3	2	3	1	2	1	2	0

Table 1: *The number of possible comparisons and possible required iterations of the midpoint-calculation code for an enhanced binary search of a table of four elements.*

Table Entry	Subtables Left	Subtables Right	Subtable Weight Left	Subtable Weight Right
1	0	7	0	17
2	1	6	1	14
3	2	5	3	11
4	3	4	5	8
5	4	3	8	5
6	5	2	11	3
7	6	1	14	1
8	7	0	17	0

Table 2: *A summary of the possible cases for an enhanced binary search of a table of eight elements. Assuming that the entry in the left-hand column matches the search argument, the next two columns indicate the number of subtables to the left and right of the entry. The two right-hand columns show the subtable weights, which reflect the number of iterations necessary to find the search argument in each case.*

prior search). The subtrees to either side represent the search path used as a result of the first comparison. Although the table's 11 elements require a complete binary-search tree to a depth of 4, the enhanced search has two trees to consider, one to a depth of 2 and the other to a depth of 3. The resulting change in depth of the search tree translates to a reduction in the number of iterations required by the search.

Figure 3 illustrates the depth of each node in a full binary-search tree and the total number of accesses required to inspect every node in the tree. A binary search of a table of seven elements would require an average of 2.43 (17/7) accesses if the likelihood for all cases were equal.

Table 1 illustrates all of the possible cases for a table of four elements. The left half of the table shows the number of comparisons required for each element in each configuration. The right half of the table shows the number of iterations through the midpoint-calculation code if the comparison is moved to the beginning of the loop and the previous search information is used. The average number of comparisons in the example shown is 2.13 (34/16), but the number of iterations is 1.13 (18/16). Traditional implementations would have required 2.00 iterations of the comparison code and the midpoint-calculation code.

Table 2 summarizes the possible cases for a table of eight elements and the number of table interrogations required to inspect every entry in every subtable for every case. The subtable "weights" reflect the number of iterations required in each case. If the weights are added and the equal-likelihood assumption is applied, the result is an average of 2.84 table accesses and 1.84 iterations.

For a full binary tree of depth D, there are $2^{(D-1)}$ nodes at that depth. In general, at depth K there are $2^{(K-1)}$ nodes at the level of K in the tree. When the tree is full (meaning all nodes are present at a level), the average number of comparisons (C) to locate a node, assuming equal likelihood, is the sum of the levels for each node divided by the number of nodes. Thus

$$C = \sum_{I=1}^{D} \frac{I(2^{I-1})}{2^{D-1}}$$

To extend to the case for the complete, but not full, binary tree, the average becomes

$$C = \sum_{I=1}^{D} \frac{I(2^{I-1})+R(D+1)}{N}$$

www.americanradiohistory.com

TAVA CORP. INTRODUCES THE TRUMP CARD®, IBM® COMPATIBLE, FULLY POPULATED 256K RAM + SERIAL I/O + GAME I/O. $499

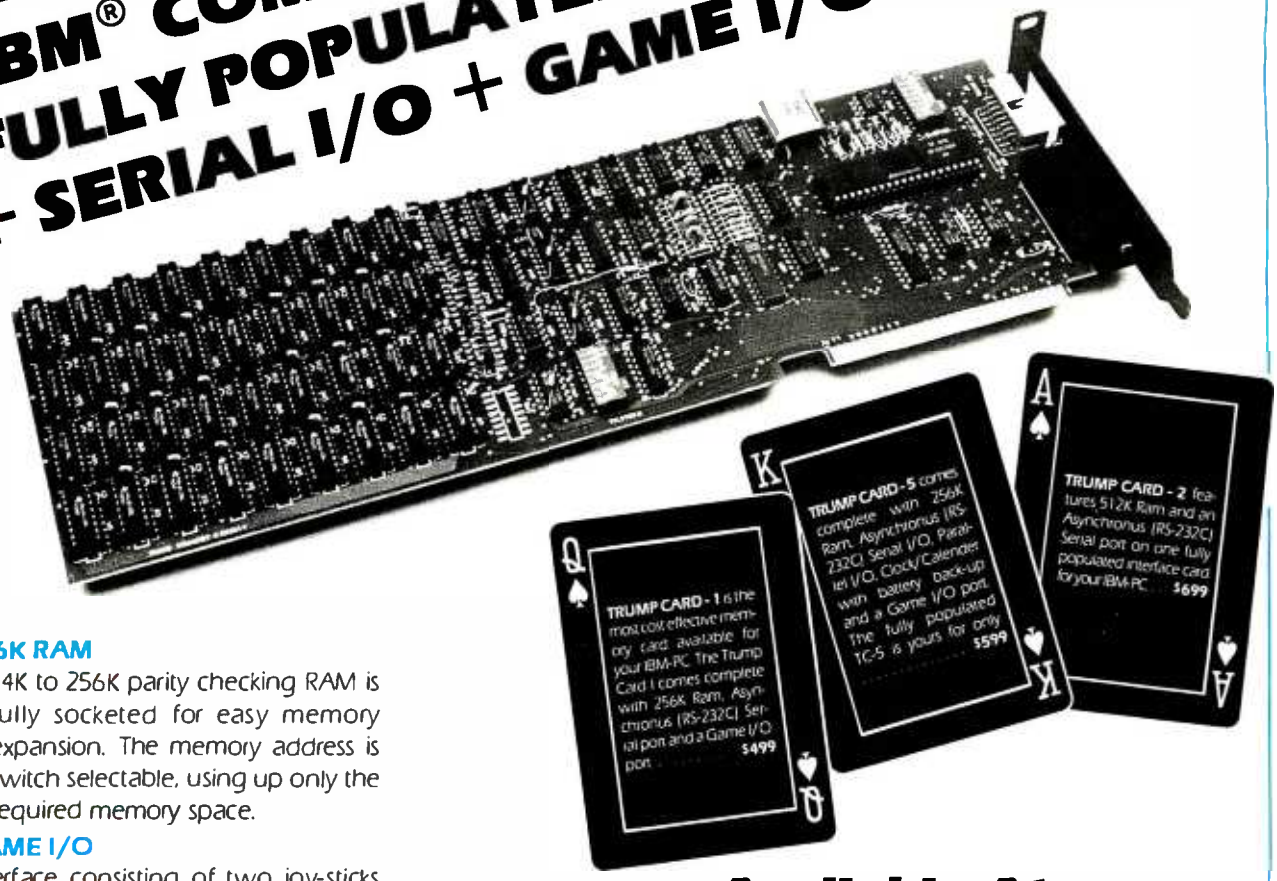

256K RAM

A 64K to 256K parity checking RAM is fully socketed for easy memory expansion. The memory address is switch selectable, using up only the required memory space.

GAME I/O

Interface consisting of two joy-sticks and four switch inputs are IBM BASIC compatible. A standard GAME I/O DB 15 connector provides connection to the rear plate of the IBM computer.

GOLD IBM INTERFACE

Gold connectors as well as glass epoxy PCB will provide years of reliable service, with all hardware interface meeting the IBM specification.

ASYNCHRONOUS COMMUNICATION

A RS232 and 20Ma (TTY) interface supports software programable baud rates, parity, stop bits, and character. Modem and serial printer are fully supported by the IBM communication software. A standard DB25 connector allows for the easy connection to serial devices.

Available At CompuShack Stores

OUTSTANDING QUALITY AT AFFORDABLE PRICES!

For Further Information Contact:

Tava Corp.
2630 Walnut Ave., Suite G
Tustin, CA 92680
(714) 730-6772
Headquarters Telex: 18-3511
Answer Back CSMA

*TRUMP CARD is a registered trademark of TAVA Corporation
*IBM is a registered trademark of IBM Corporation

Circle 357 on inquiry card.

www.americanradiohistory.com

APPLE • ALTOS • ATARI • MAXELL • DYSAN • EPSON • CCS • SHARP • CASIO • HP • VERBATIM • MEMOREX • SOROC • CORVUS • ADDS

HP • D.C. HAYS MICROCOMPUTERS • PAPER TIGER • GTE • DIABLO • BMC • CENTRONIC • NEC • HAZELTINE • MEMOREX • AMPEX • PERSONAL SOFTWARE • ADDS • XEROX • DIABLO

BMC • CENTRONIC • NEC • HAZELTINE • AMPEX • VERBATIM • HITACHI • HAYDEN • CANON • NOVATION • D.C. HAYS MICROCOMPUTERS • PAPER TIGER • PERSONAL SOFTWARE • GTE

MICRO

BUSINESS WORLD INC.
Information Line (213) 996-2252
TOLL FREE MAIL ORDER LINES
(800) 423-5886 Outside Calif.

IBM SPECIAL OF THE MONTH IBM

DISK DRIVES FOR THE PC
DOUBLE SIDED/DOUBLE DENSITY 320K

MSL **$650.00**

OUR PRICE **$239.00** ONE YEAR WARRANTY

APPLE II PLUS



PLUG-COMPATIBLE DRIVES
RANA ELITE I

W/CONTROLLER		W/OUT CONTROLLER	
MSL	OUR PRICE	MSL	OUR PRICE
549.00	399.00	449.00	329.00

MICRO-SCI A2

W/CONTROLLER		W/OUT CONTROLLER	
MSL	OUR PRICE	MSL	OUR PRICE
519.00	379.00	409.00	299.00

IBM PERSONAL COMPUTER



INCLUDES:
2 Drives DS/DD
Color Graphic Board
64K Memory
12" BMC GRN PHS

MSL 3550.00

OUR PRICE $2,995.00 Save 555.00

*Subject to availability

NEW! APPLE IIE*

CALL FOR PRICE

*Subject to availability

SYSCOM — THE APPLE II
APPLE II 1430.00

WORK ALIKE W/64 K AND COLOR SYSCOM II
OUR PRICE 849.00

THE APPLE COMPATIBLE ALTERNATIVE

FRANKLIN BUSINESS SYSTEM

Franklin Ace 1000 system • 64K • Disk Drive with controller card • green phs. video monitor.

$1395.00

SAVE $1000 COMPARED TO APPLE SYSTEM

ALTOS 8 BIT SYSTEMS

Z80-BASED MULTIUSER
WINCHESTER HARD DISK AND FLOPPY SYSTEMS
INCLUDES MP/M II OPERATING SYSTEM

	Model No.	No. of Floppy Disks	Floppy Disk Storage	Suggested List Price	Our Price
8	Series 5-15D	2	2 Mb	$2,990	$2,449.00
8	Series 5-5D	1	1 Mb	$5,490	$4,288.00
1	580-10	1	1 Mb	$6,490	$5,422.00
T					

	ALTOS 5-150	APPLE III
Base Price:	$2990	$2995
Disk Drives:	2	1, add 1@ $450
Capacity:	2M bytes	320k bytes (for both)
Video:	User Opt. CRT	Monitor included
Terminal Cost:	$800 average	Monitor included
Operating Sys:	MPM included	Apple POS
CP/M MP/M Oasis DOS	MPM included available	CP/M @ $465 not available

	ALTOS 5-150	APPLE III
I/O Port	3 ser., 1 parallel	1 ser., 1 par. =$165
RAM	192 K	128K
Processor:	Z80A	6502A
Computer Grade:	Industrial	Standard
Dot Matrix Printer	User Opt. @ $600	User Opt. @ $600
TOTAL	$4390*	$4675*

RADIO SHACK TRS 80 MOD III

w/48K
2 DRIVE
RS232

OUR PRICE **$1733.00**

OSBORNE PERSONAL COMPUTER

DOUBLE DENSITY
INCLUDES SOFTWARE

- CPM
- MAIL MERGE
- WORDSTAR
- CB BASIC
- SUPERCALC
- M BASIC

OUR PRICE
1795.00

APPLE PERSONAL COMPUTER

PERIPHERALS AND SOFTWARE

HARDWARE	MSL	Our Price
Videx Combo Package	375.00	259.00
Videx Videoterm Card	345.00	239.00
Videx Keyboard Enhancer II	149.00	115.00
Microsoft Softcard with CP/M	345.00	235.00
Microsoft Premium Pak	695.00	499.00
Microsoft 16K Card	99.95	72.50
PCP Appl I - Card (4 MHZ version)	445.00	339.00
PCP Appl I - Card (6 MHZ version)	595.00	449.00
Corvus Winchester 5MB	2,495.00	1,949.00
Corvus Winchester 10MB	3,495.00	2,849.00
Corvus Winchester 20MB	4,495.00	3,699.00
Saturn Systems 32K	249.00	165.00
Saturn Systems 64K	425.00	312.00
Saturn Systems 128K	599.00	452.00
Hays Micromodem II	379.00	285.00
Hays Smartmodem	279.00	225.00
Kensington System Saver	90.00	68.00
M & R RF Modulator	30.00	22.00
M & R Super Fan	50.00	37.00
Grappler +	175.00	135.00
Practical Peripherals Microbuffer II 16K	259.00	225.00
Practical Peripherals Microbuffer II 32K	299.00	239.00
Prometheus Versa Card	199.00	149.00
SVA Disk 2+2 Controller DSSD	395.00	335.00
SVA Disk 2+2 Controller DSDD	595.00	489.00
SVA App L Cache 256 K Memory	1,200.00	1,049.00
TG Joystick	59.95	42.00
TG Select-A-Port	59.95	42.00
Wesper Micro Wizard 80	249.00	179.00
Wesper Micro BPO 16K	179.00	139.00
Wesper Micro BPO 32K	219.00	159.00
Wesper Micro SOB 16K	249.00	189.00
Wesper Micro SOB 32K	279.00	229.00
BMC 1401 w/RGB Interface	595.00	319.00
ALS Z Card w/CPM for Apple II	349.00	209.00

IBM PERSONAL COMPUTER

PERIPHERALS & SOFTWARE

HARDWARE	MSL	Our Price
QUADRAM Quadboard, 4 function brd with 64 K	595.00	489.00
with 256 K	995.00	699.00
Quad Color II With 640x240 Resolution	575.00	439.00
Quad Color III With 640x400 Resolution	850.00	669.00
PrinterCard w/cable (parallel)	159.00	109.00
PrinterCard w/cable (serial)	179.00	139.00
Davong Hard Disks		CALL

IBM

SOFTWARE		
Zork I by Infocom	39.95	28.50
Zork II by Infocom	39.95	28.50
Zork III by Infocom	39.95	28.50
Snooper Troops #1 by Spinnaker	44.95	33.50
Snooper Troops #2 by Spinnaker	44.95	33.50
Deadline by Infocom	49.95	37.50
Flight Simulator by Microsoft	49.95	37.50
Starcross by Infocom	39.95	28.50
Story Machine by Spinnaker	34.95	26.50
The Home Accountant by Continental	150.00	111.00
VisiCalc by VisiCorp	250.00	189.00
Wordstar by Micropro	415.00	369.00
The Tax Manager by Microlab	250.00	189.00
Visifile by VisiCorp	300.00	229.00
Supercalc by Sorcim	295.00	229.00
dBase II by Ashton Tate	700.00	489.00
Personal Investor by PBL	145.00	119.00

HEWLETT PACKARD

HANDHELD CALCULATORS AND COMPUTERS*	MSL	Our Price
HP-10C Slim-Line Prog Scientific	80.00	64.00
HP-11C Slim-Line Adv Prog Sci	100.00	79.00
HP-12C Slim-Line Adv Finan Prog	150.00	129.00
HP-15C Slim-Line Advanced Programmable Scientific w/Matrices	135.00	119.00
HP-16C Slim-Line Prog for Digital Electronics and Comput Science	150.00	129.00
HP-41CV Handheld Comp with 5X Memory	275.00	209.00
HP-97 Desktop Fully Prog Print	750.00	599.00
Card Reader for 41CV/C	215.00	162.00
Printer for 41CV/C	385.00	289.00
Optical Wand For 41 CV/C	125.00	97.00
Quad Ram EQuals 4 Mem. Mods	95.00	81.00

PRINTERS

EPSON	MSL	Our Price
Epson MX-80 T Type III*	645.00	CALL
Epson MX-80F/T Type III*	745.00	CALL
Epson MX-100 Type III* *w/graphics	995.00	CALL
OKIDATA		
Okidata 82A w/tractor 80 col	549.00	409.00
Okidata 83A W/tractor 132 col	899.00	709.00
Okidata 84P 132 col. serial	1,395.00	1019.00
Okidata 84S 132 col. parallel	1,495.00	1177.00
C. ITOH		
C. Itoh F 10 40 cps (parallel)	1795.00	1377.00
C. Itoh F 10 40 cps (serial)	1895.00	1439.00
C. Itoh Prowriter (parallel)	695.00	519.00
C. Itoh Prowriter (serial)	749.00	565.00
SMITH CORONA		
TP-1 Letter Quality	895.00	599.00
Tractors	150.00	139.00
STAR MICRONIC		
Gemini 10	495.00	379.00

MODEMS

NOVATION	MSL	Our Price
Cat	189.00	149.00
O-Cat	199.00	159.00
Auto Cat	249.00	209.00
212 Auto Cat	695.00	629.00
Super Mike	14.95	12.95
Apple Cat II	389.00	289.00
212 Apple Cat	725.00	619.00
HAYS MICROCOMPUTER PRODUCTS		
Hays Stack Smartmodem	289.00	229.00
Smart Modem 1200	699.00	529.00
Micromodem 100	399.00	299.00
ANCHOR AUTOMATION		
Signalman Modem MK I	99.00	79.00
Mark VII (Auto Answer/Dial)	159.00	125.00

S-100 PRODUCTS

ALL BOARDS ASSEMBLED & TESTED!

CALIFORNIA COMPUTER SYSTEMS	MSL	Our Price
Z-80CPU	325.00	259.00
Disk Controller/CPM 2.2	425.00	339.00
64K Static RAM (200 ns)	750.00	549.00
Mainframe 110/60 HZ or 220V/50HZ	575.00	475.00
2 Serial Port+2 Parallel	360.00	289.00
CP/M 2.2	150.00	119.00

SOFTWARE

	MSL	Our Price
CHOPLIFTER by Broderband	34.95	26.20
Frogger by Sierra On-Line	34.95	26.20
Canyon Climber by Datasoft	29.95	22.50
Wizardry by Sir Tech	49.95	37.50
Zork by Infocom	39.95	29.95
Snooper Troops #1 by Spinnaker	44.95	33.75
Deadline by Infocom	49.95	37.50
Apple Panic by Broderband	29.95	22.50
Master Type by Lightning	39.95	29.95
Typing Tator II by Microsoft	24.95	18.75
Story Machine by Spinnaker	34.95	29.95
The Home Accountant by Continental	74.95	56.50
PFS: File by Software Publishing	175.00	131.25
VisiCalc by VisiCorp	250.00	189.00
PFS: Report by Software Publishing	95.00	71.25
Screenwriter II by Sierra On-Line	129.95	97.50

MONITORS

BMC	List	Our Price
12" Grn. Phs KQ 12 EU	249.00	179.00
12" Grn. Phs EQ 1200 SU	219.00	149.00
NEC		
JB 12" Green	249.00	175.00
JC 12" Color	495.00	345.00
USI		
PI-2 12" Green	249.00	155.00
PI-3 12" Amber	289.00	185.00
AMDEK		
300 12" Green	195.00	145.00
Color I	395.00	325.00
Color II RGB Highres	895.00	695.00
ELECTROHOME		
ECM 1302-1 13" RGB Hires	595.00	395.00
ECM 1302 2 13" RGB Hires	895.00	595.00
Color Board for Apple II	249.00	195.00

MICRO MAIL ORDER

BUSINESS WORLD WAREHOUSE
18720 Oxnard. #108
Tarzana, CA 91356

OUTSIDE CA CALL TOLL FREE 1 (800) 423-5886 IN CA (213) 996-2252

Name (Please print) _____
Address _____
City _____ State _____ Zip _____

Qty	Make	Model	Description	Price	Total

Certified Check or M.O.
Bank Wire Transfer

Allow 2 weeks clearance for personal check

CREDIT CARD #
Exp. Date
Signature

TOTAL ORDERS $
TAX (IF APPLICABLE)*
SHIPPING & HANDLING**
TOTAL ENCLOSED $

VISA MasterCard

We reserve the right to correct typographical errors. This ad supercedes all previous ads. Prices subject to change without notice.

*California residents add 6½% sales tax.

**Add 3% Shipping & Handling — Add 3% surcharge for credit cards. Order cannot be shipped unless accompanied by payment, including shipping, handling and tax where applicable.

MAXELL • DYSAN • EPSON • CCS • SHARP • CASIO • HP • VERBATIM • MEMOREX • SOROC • CORVUS • PERSONAL SOFTWARE • CCS

Circle 270 on Inquiry card.

www.americanradiohistory.com

where N is the number of nodes in the tree satisfying the relation

$$N = 2^D + R - 1$$

The solution for the general case becomes

$$C = \frac{(D-1)(2^D)+R(D+1)}{N}$$

Although the formulas imply a method to calculate the average number of comparisons as a function of N by solving for D and R, the round-off errors in the calculations of LOG(2,N) produce incorrect results. Thus the best way to calculate the average number of comparisons is through an iterative process that determines the depth of the complete tree and adds the remaining weights.

When information from a prior search is available, you compute the average number of comparisons by examining each possible case, computing the sum, and dividing by the number of cases. Because the table has N elements, the number of cases is N. For each case in which the equal-likelihood assumption applies, there is a probability that the argument is equal to a prior argument ($1/N$) and not equal ($(N-1)/N$). Because the subtable weights represent the number of comparisons for the nodes in the subtables, you can simply divide the sum by the number of cases ($N-1$). If K is set to

$$K = \sum_{I=1}^{N-1} \textit{subtable weight}_I$$

the result after simplification is

$$C = 1 + \frac{2K}{N^2}$$

The number of iterations of the midpoint-calculation code is

$$I = \frac{2K}{N^2}$$

The above derivations apply to the case of equal likelihood; however, it is possible to have the case of never-equal likelihood. Changing the probabilities for the never-equal case produces

$$C_{NEVER} = 1 + \frac{2K}{N(N-1)}$$

The number of iterations of the midpoint-calculation code is

$$I_{NEVER} = \frac{2K}{N(N-1)}$$

A general formula relating the probability of a match with a prior search argument (M) and the size of the table (N) is

$$C = 1 + \frac{2K(1-M)}{N(N-1)}$$

and the number of iterations becomes

$$I = \frac{2K(1-M)}{N(N-1)}$$

The possibility of the 80/20 rule applying in an example requires that we compute the probability of the occurrence of a duplicate argument. The rule divides the members of the table into two sets: high activity (H) and low activity (L). A duplicate occurrence can exist only if the prior and current arguments are members of the same set. If X represents the prior argument and Y the current argument, the probability of duplication can be computed by

$$P(X=Y)=A*B*C*+D*E*F$$

where

$A=P(X=Y|X,Y \text{ in } H)=1/(0.2N)$
$B=P(X \text{ in } H)=0.8$
$C=P(Y \text{ in } H)=0.8$
$D=P(X=Y|X,Y \text{ in } L)=1/(0.8N)$
$E=P(X \text{ in } L)=0.2$

and

$$F=P(Y \text{ in } L)=0.2$$

The resulting simplifications produce

$$P(X=Y)=3.25/N$$

and

$$P(X\neq Y)=(N-3.25)/N$$

Thus

$$C_{RULE} = 1 + \frac{2K(N-3.25)}{N^2(N-1)}$$

As before, the number of iterations of the midpoint-calculation code is

$$I_{RULE} = \frac{2K(N-3.25)}{N^2(N-1)}$$

The results of these equations are shown in table 3, which compares a pure binary search for tables of dif-

ENHANCE YOUR COLOR COMPUTER WITH THESE GREAT PROOUCTS!

MACRO-80c DISK BASED EDITOR/ASSEMBLER
This is a powerful macro assembler, screen oriented editor and machine language monitor. It features local labels, conditional assembly, printer formatting and cross reference listings. Assemble multiple files. Program comes on Radio Shack compatible disk with extensive documentation. Price: $99.95

MICROTEXT COMMUNICATIONS
Make your computer an intelligent printing terminal with off-line storage! Use Microtext for timesharing interactions, printing what is received as it is received and saving text to cassette, and more! Price: $59.95

PI80C PARALLEL PRINTER INTERFACE
Use a parallel printer with your Color Computer! Serial-Parallel converter plugs into the serial port and allows use of Centronics-compatible printers. You supply the printer cable. Price: $69.95

THE MICRO WORKS COLOR FORTH
Color Forth is easier to learn than assembly language, executes in less time than Basic and is faster to program in than Basic. Rompack comes with 112-page manual containing glossary of system-specific words, full standard FIG glossary and complete source. A fascinating language designed for the Color Computer! Price: $109.95

SDS-80C SOFTWARE DEVELOPMENT SYSTEM
SDS-80C is a Rompack containing a complete editor, assembler and monitor. It allows the user to write, assemble and debug assembly language programs with no reloading, object patching or other hassles. Supports full 6809 instruction set. Price: $89.95

80C DISASSEMBLER
Runs on the Color Computer and generates your own source listing of the Basic interpreter ROM. Documentation includes useful ROM entry points, complete memory map, I/O hardware details and more. Cassette requires 16K system. Price: $49.95

GAMES: Star Blaster ★ Pac Attack ★ Berserk ★ Cave Hunter ★ Starfire ★ Astro Blast ★ Starship Chameleon ★ Adventure: Black Sanctum ★ Adventure: Calixto Island ★

THE MICRO WORKS

Also Available: Machine Language Monitor ☐ Books ☐ Memory Upgrade Kits Parts and Services Call or write for more information

California Residents add 6% Tax
Master Charge/Visa and COD Accepted

P.O. BOX 1110 DEL MAR, CA 92014 619-942-2400

Circle 278 on Inquiry card.

www.americanradiohistory.com

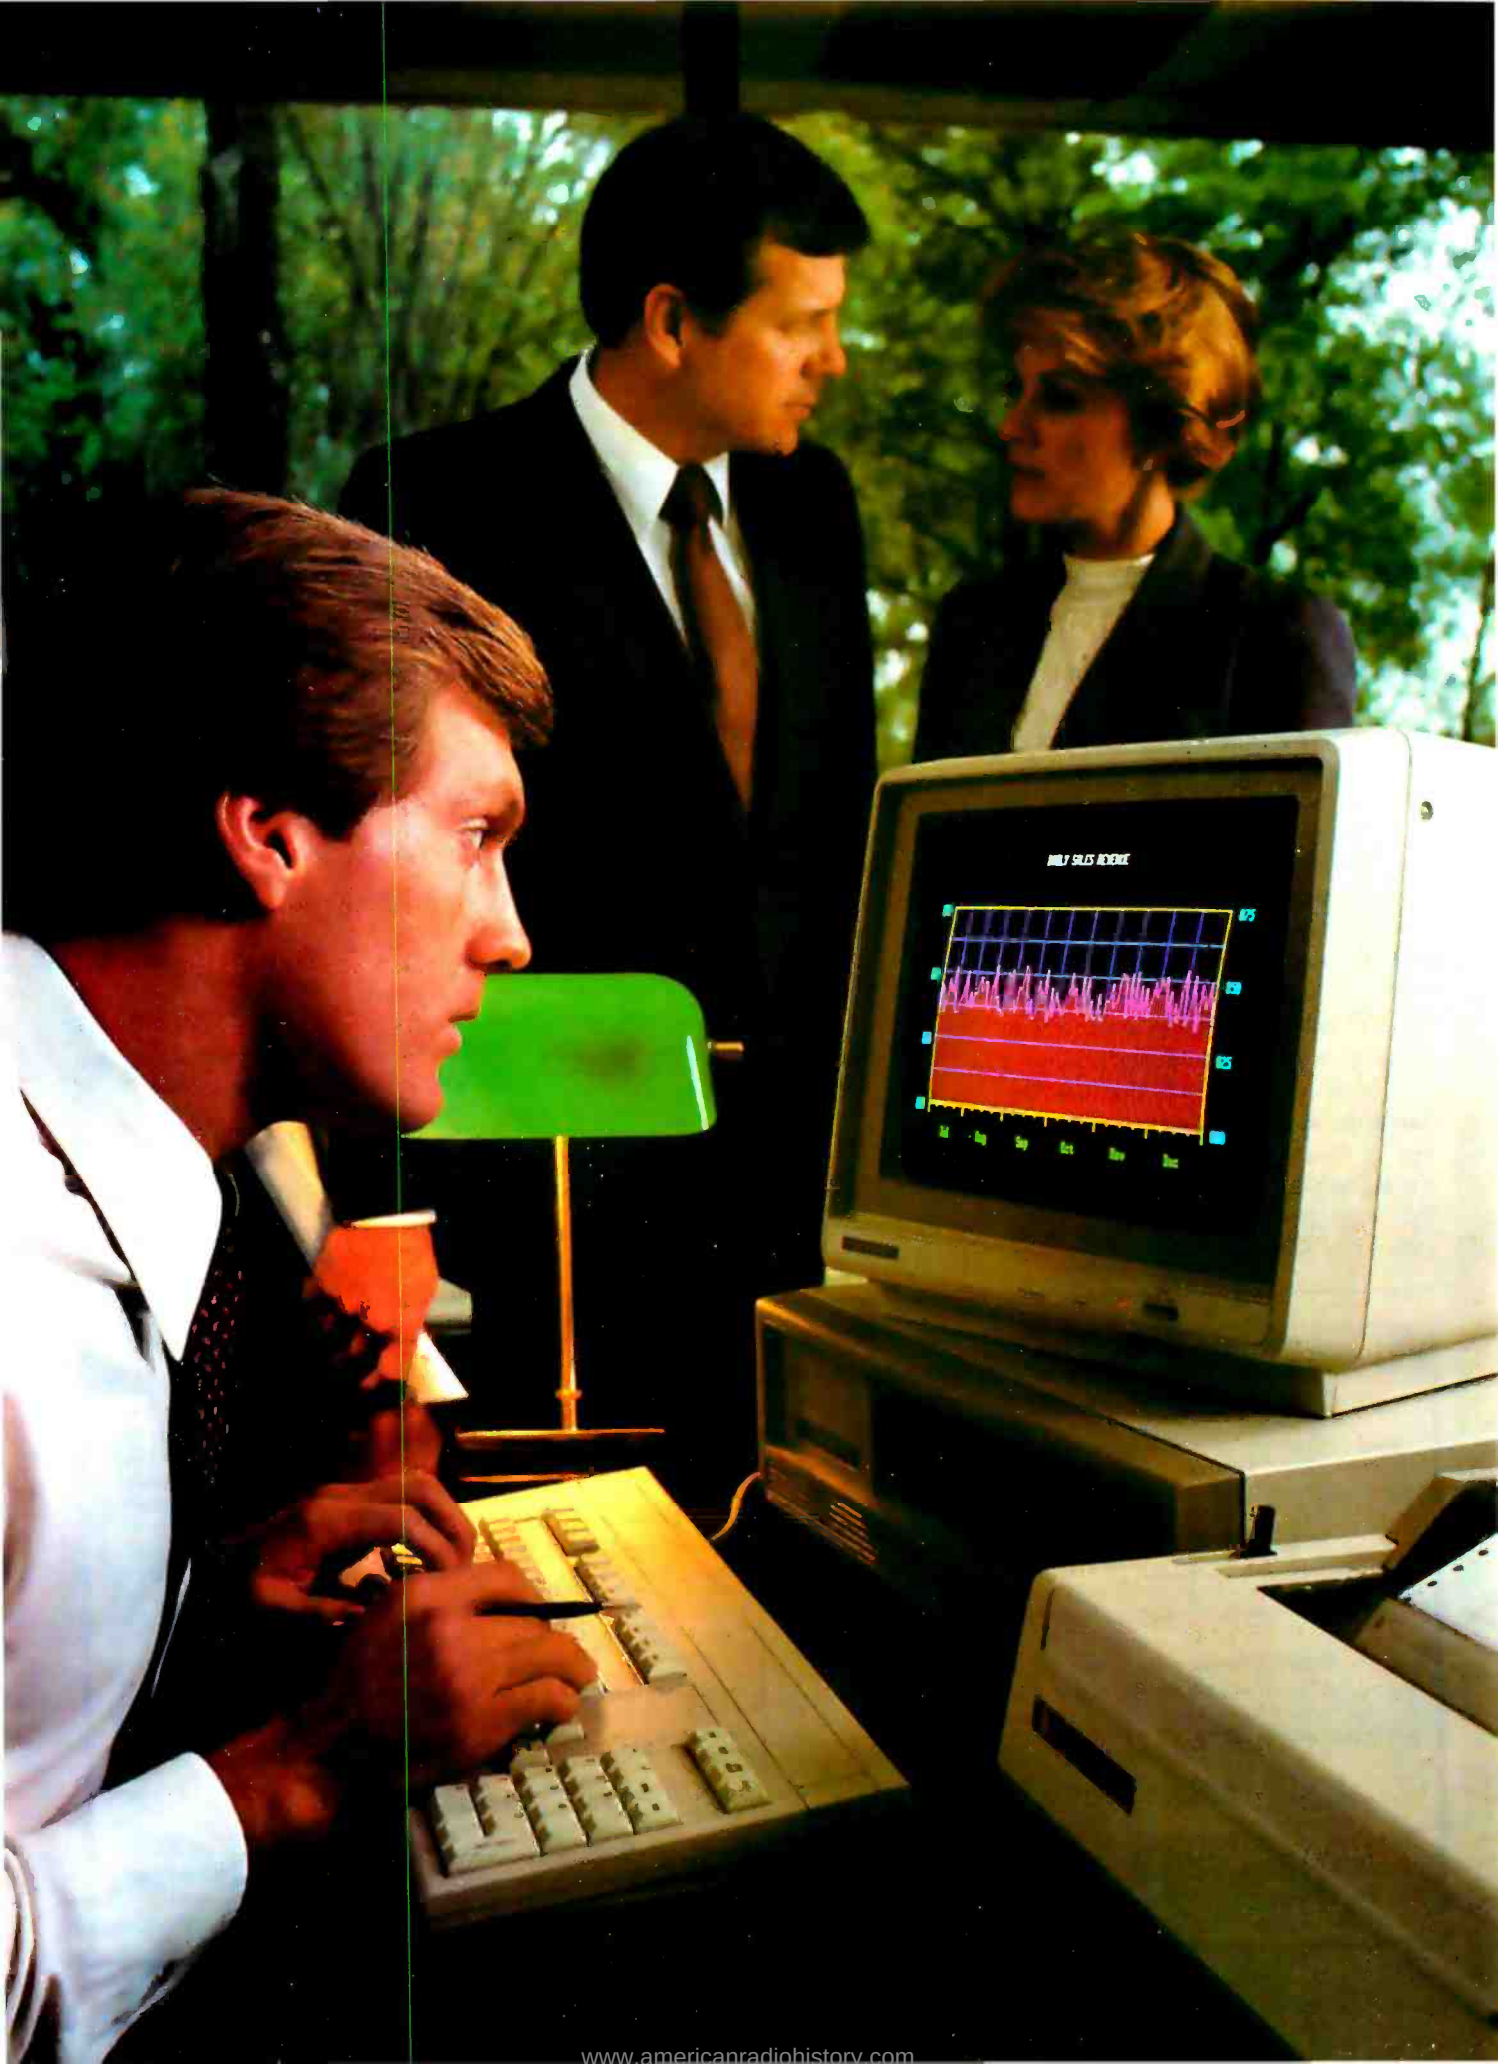

www.americanradiohistory.com

The new TI Professional Computer. It makes you the one with the answers.

Today's business executive is faced with a world of questions. Questions about productivity. Cost control. And the bottom line.

To help you come up with the answers and alternatives, we introduce the new Texas Instruments Professional Computer. The one with the power, the expandability, the easiest-to-use keyboard, extremely high resolution graphics, and a broad array of software.

All the leading operating systems and programming languages are available. You can use many popular application programs from the best software suppliers to help you create spreadsheets, do word processing, construct graphics, communicate with other data bases or create your own. All of which lets you control assets, manage your time, and make projections for tomorrow's performance—today.

And for a clear "hard copy" printout of information, you can rely on the new 850 Series printers, made by Texas Instruments especially for the new TI Professional Computer.

In short, the TI Professional Computer helps you make better business decisions based on better information. With the performance and reliability you expect from TI.

If you're on your way up, the new Texas Instruments Professional Computer can help. Because it makes you the one with the answers.

For full information and a demonstration, visit your local computer dealer, or write: Texas Instruments, Dept. 1A, P.O. Box 402430, Dallas, Texas 75240. Or call toll-free: 1-800-527-3500.

SPECIFICATIONS

System Unit
16-bit, 8088 microprocessor
64K byte RAM, expandable to 256K bytes
4K byte graphics display memory
5-slot expansion bus

Keyboard
Specially designed low profile
Popular typewriter layout
97 keys, including 12 function keys
Separate numeric keypad and cursor control clusters
Tactile response, for quick positive entry
Upper- and lower-case letters

Display Units
12-inch monochrome (green phosphor) or 13-inch full-color, 25 lines x 80 columns
High resolution, 720 x 300 pixels

Mass Storage
Built-in 320K byte diskette standard
Additional internal storage of 320K byte diskette, or 5 or 10 Mbyte Winchester disks optional

Communications Options
300 BPS or 300/1200 BPS internal modem
TTY, 3780
3270 SNA stand-alone (Summer 1983)
3270 BSC and SNA cluster (Fall 1983)

Operating Systems
MS™-DOS, Digital Research™ CP/M-86®, and Concurrent CP/M-86™, UCSD p-System™

Languages
BASIC, COBOL, FORTRAN, Pascal

Applications Software
Over 100 programs available from the most popular software vendors such as Microsoft, Ashton-Tate, Micro-Pro, IUS, Sorcim, Peachtree, BPI, Lifeboat and others.

Printers (Available Spring 1983)
150-cps TI 850 Series for most applications

FOOTNOTES: MS-DOS is a trademark of Microsoft Corporation. CP/M-86 and Concurrent CP/M-86 are trademarks of Digital Research, Inc. UCSD p-System is a trademark of the Regents of the University of California.

Creating useful products and services for you.

TEXAS INSTRUMENTS

Copyright © 1983 Texas Instruments

291427 E

www.americanradiohistory.com

Circle 382 on inquiry card.

S-100™ Div of 696 Corp Est 1977

COMPUTERS

COLUMBIA (IBM-P.C.) 128K RAM, 2 drives $2546.00
CROMEMCO CS-10 Personnel Computer w/s.w. 1525.00
EAGLE II w/s.w. 2339.00
ITHACA INTERSYST. DPS-1 w/frt panel & MPU 1795.00
MORROW MICRODECISION II w/22 drives & s.w. 1295.00

BOARDS

AOS Promblaster w/s.w. 298.00
ADVANCED DIGITAL Super-quad w/serial port (single card computer) 700.00
CCS 2810 CPU 259.00
CCS 64K Dynamic RAM 299.00
CROMEMCO DPU 68000/Z80 839.00
COMPUPRO 8/16 bit 64K Static Ram (ASM) 488.00
NORTHSTAR ADV. 8/16 upgrade w/64K RAM 399.00
S-100's PRO-1 2 way Extender Card 33.00
SCION'S Microangelo Graphics Bd. (MA520) 986.00
SDSystems Versafloppy w/CP/M 3.0 350.00
SEATTLE IBM-PC 64K RAM+ 359.00
SSM 80 character Video Board 375.00
TARBELL DD FD Controller 396.00

MONITORS/TERMINALS

KB-1 Keyboard by S-100 186.00
LIBERTY FREEDOM 100 w/detached KB 535.00
SANYO 15" Monitor 295.00

PERIPHERALS — ETC.

EPSON MX 100 III 625.00
HAYES Smartmodem 1200 Baud 519.00
PARADYNAMICS 2016R Mainframe 675.00
INTEGRAND 800 DB/2F w/options 497.00
OPEN SYSTEMS Inventory, Order Prod. etc. software 600.00
PLASTIC FILE CASE w/10 DS DD 5" VERB/3M 40.00
TANDON TM 100-2 DS DD Drive for IBM PC, etc. 245.00
TECMAR 5 Meg Winchester Cartridge for IBM-P.C. 1,525.00
VOTRAX Personal Speech System 275.00

ALL SALES BACKED BY FULL DEALER SUPPORT
VISIT OUR SHOWROOM
Hrs.-9:00 A.M.—5:30 P.M. M—F
Subject to Available Quantities • Prices Quoted Include Cash Discounts Shipping & Insurance Extra

S-100
14425 North 79th Street, Suite B
Scottsdale, Arizona 85260
SALES 800-528-3138

Table Size	Binary Search	Enhanced Search Equal Likelihood	Enhanced Search Never Equal	80/20 Rule
1.00	1.00	0.00	0.00	0.00
2.00	1.50	0.50	1.00	0.00
3.00	1.67	0.89	1.33	0.00
4.00	2.00	1.13	1.50	0.28
5.00	2.20	1.36	1.70	0.60
6.00	2.33	1.56	1.87	0.86
7.00	2.43	1.71	2.00	1.07
8.00	2.63	1.84	2.11	1.25
9.00	2.78	1.98	2.22	1.42
10.00	2.90	2.10	2.33	1.58
30.00	4.13	3.44	3.56	3.18
50.00	4.86	4.12	4.20	3.93
100.00	5.80	5.06	5.11	4.95
300.00	7.33	6.59	6.61	6.54
500.00	8.00	7.32	7.34	7.29
1000.00	8.99	8.31	8.32	8.30
5000.00	11.36	10.62	10.62	10.62
10000.00	12.36	11.62	11.62	11.62

Table 3: *A comparison of the binary search and the enhanced binary search. The average number of iterations of the midpoint-calculation code that are required to find the search argument are given for different sizes of the table being searched. For the enhanced binary search, the number of iterations is given for three different assumptions about the table being searched: (1) that each element in the table is equally likely to match the search argument, (2) that no two elements in the table are equally likely to match the search argument, and (3) that after a data argument has been seen, the probability of seeing it again after the next iteration is 3.25 times greater than the probability for the random case (the 80/20 rule).*

ferent sizes to the enhanced binary search in the cases of equal likelihood, never-equal likelihood, and the 80/20 rule.

While a binary search can be implemented in many ways, traditional implementations require the initialization of local variables (five PL/I statements) followed by a loop composed of the midpoint calculation (five PL/I statements) and a comparison of the search argument with an entry in the table (three PL/I statements). The enhanced search is similar in structure, but its midpoint calculation follows the comparison. If the processor that executes the searches requires one instruction cycle per PL/I style statement, the binary-search time (BT) can be expressed as

$$BT = 5 + 8C$$

and the enhanced-search time (ET) can be expressed as

$$ET = 5 + 3C + 5I = 8 + 8I$$

in which C represents the number of comparisons and I represents the number of iterations needed to satisfy the search.

If in the two preceding equations we substitute the number of comparisons and the number of iterations indicated in table 3, a comparison of the data indicates that the enhanced search is usually better than a pure binary search. If the tables contain approximately 300 entries and an equal likelihood applies, the enhanced search results in an advantage of approximately 6 percent. A higher probability of duplication increases the reduction-in-time advantage of the enhanced search. If your processor takes a long time to perform a divide or shift, the advantage approaches 10 percent.

A Description of the Process

We can express the process for the improved binary search in several ways. Table 4 is an example of a decision table that represents a looping process. The first row of entries

www.americanradiohistory.com

STATPRO

The most comprehensive and sophisticated statistics and graphics database program ever developed for the personal computer.

Years of research, development, and field testing have resulted in the most extensive statistics and graphics database program specifically designed for the personal computing environment. STATPRO™ provides the data analysis capabilities and flexibility previously available only on a large computer. Researchers, business professionals, and other data analysts will welcome the breadth yet simplicity of this program! STATPRO requires no previous computer experience, no special command language. Single keystrokes access all of the data manipulation, statistics, and graphics power of STATPRO.

STATPRO allows easy access to its extensive numerical data capabilities.

The strength of STATPRO is found in the functions of its user friendly, menu-driven database. You can easily learn to enter and edit, manipulate, transform, and print out data. STATPRO's searching

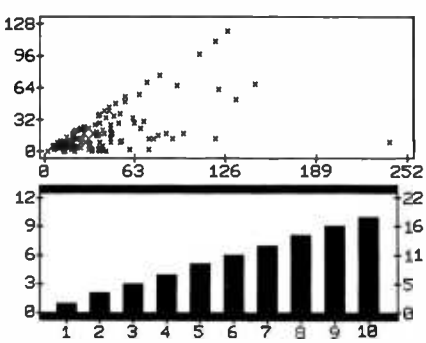

capabilities allow these functions to be performed on all your data or a user defined subset of your data. Over 600 transformations and conversions are available. You can place the results of these transformations into the same field or any other field in STATPRO's database.

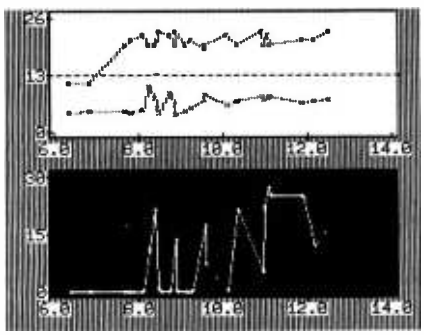

STATPRO offers a comprehensive collection of statistical procedures.

The statistics component of STATPRO contains a multitude of procedures, grouped into the following modules:

Descriptive: Contingency analysis, cross tabulation, normality tests; descriptive, comparative, range and non-parametric statistics.

Regression: Linear, non-linear, stepwise, and multiple regressions; residual analysis and statistical matrices.

Analysis of Variance: Single and nested classifications, two and three way equal and unequal sample size and non-parametric ANOVA.

Time Series: Moving averages, multi-stage least squares, fitted polynomials and trig functions, additive and multiple forecasting.

Multivariate: Principal components factor, orthogonal factor, oblique factor, pair-weighted cluster, discriminant function, multiple contingency, and canonical correlation analysis; positive definite inverse and determinant.

STATPRO provides graphic representation of your data in minutes.

STATPRO graphics plot *all* the results of your STATPRO statistical analyses including scatter, triangle, regression, and box plots; piecharts, histograms, and dendograms. Further, with STATPRO you can custom edit with keyboard, paddles or graphics tablet. You can create characters and shapes and place them anywhere on a graph. Mix text with data fields. Place multiple plots on each screen. Define your axis limits.

You can save your graphics on a disk for a multiple color "slide show" presentation, or print them out through a variety of compatible printers.

STATPRO documentation wraps up the package.

Although STATPRO software is essentially self-documenting, complete print documentation is provided. This includes walk-through tutorials, easy to understand pocket reference guides and comprehensive user's guides.

STATPRO currently runs on the Apple® II and Apple III personal computers. It will soon be available for the IBM® PC.

Find out more about STATPRO: The Statistics and Graphics Database Program.

Contact your local dealer, or call us toll-free at

800-322-2208

You can also call us toll-free for information on corporate purchase through our National Account Program.

WADSWORTH
Electronic Publishing Company,
20 Park Plaza,
Boston, MA 02116.

STATPRO is a trademark of Wadsworth Electronic Publishing Company. Apple is a registered trademark of Apple Computer, Inc. IBM is a registered trademark of International Business Machines, Corp.

www.americanradiohistory.com

	Stub	Decision Rules 1 2 3 4 5 6	Columns
Tests to be performed	M = 0	Y N N N N N	Test results that select a column
	ARG> = TABARG(M)	– Y Y Y N N	
	ARG = TABARG(M)	– Y N N – –	
	L < R	– – Y N Y N	
Data trans-formations	L = M + 1	1	Actions to be selected
	R = M	1	
	M = (L + R)/2	1 2 2	
	M = 0	1 1	
When and how loop terminated	RETURN(M)	X X X	Loop termination criteria
	/* LOOP */	X X X	
Initial steps required	SEARCH: PROCEDURE(ARG,TABARG,LEFT,RIGHT,M) RETURNS(FIXED)		
	DCL (ARG,TABARG(*),LEFT,RIGHT,L,R,M)FIXED		
	L = LEFT		
	R = RIGHT		
Instructions for terminating execution	/* NO SPECIAL TERMINATIONS */		
	END		

Table 4: *A decision table for the enhanced binary search specifying the various actions to be performed under various combinations of conditions. The labels shown in the gray areas are external to the decision table. The decision table itself is divided both horizontally and vertically. The upper part is called the "condition" portion; the lower part, shaded in blue, is the "action" portion. The left portion of the table, called the "stub," identifies the tests to be performed and the actions to be taken (in this case, data transformations). The right portion is divided into six columns, each of which expresses a decision rule. The first row of each column shows the condition under which a decision rule applies, and the lower rows show the actions to be performed if those conditions are true. For example, if M is not equal to 0, we must select one of columns 2 through 6. Moreover, if ARG is greater than or equal to TABARG(M), we can narrow our choice to columns 2 through 4. If L is also less than R, then all columns except the third are ruled out. Therefore that column expresses the relevant decision rule. Looking down that column to its action portion, you can see that two actions are selected: L is to be set equal to M+1, and M is to be set equal to (L+R)/2. All the statements in the stub are from the PL/I program shown in listing 1. The variables represent the following: ARG, the search argument (the value being searched for); TABARG, the function argument (the value at the current midpoint address); M, the midpoint address; L, the left (or low) extreme address; R, the right (or high) extreme address.*

describes the tests that have to be performed for the process to work correctly. The next row indicates the various data transformations that will be applied. The third specifies when and how the loop will be terminated. The fourth row describes the initial steps that are required, and the fifth row provides instructions for terminating the execution process. The YN-column entries specify the results of the condition tests that must be satisfied to select a column. The numbers in the column identify the actions to be selected and their sequence. The X values select the loop-termination criteria. The decision table presents, in an abstract manner, all of the information that is required for a program without requiring a unique implementation.

The programming language used in the decision-table stubs is PL/I, but converting the statements to APL, Pascal, BASIC, or machine codes would not be difficult.

A brief description of the enhanced binary-search process provides an understanding of the procedure that is employed when the searching process uses the prior search results and completes the search using the reduced implicit-search tree. For the

www.americanradiohistory.com

Now your computer can say anything and say it well. Introducing the Votrax Personal Speech System.

Quite articulate.

The unlimited vocabulary Votrax Personal Speech System is the most sophisticated, low cost voice synthesizer available today. Its highly articulate text-to-speech translator lets your computer properly pronounce conversational words at least 95% of the time.

For all those unusual words and proper names, you can define an exception word table and store your own translations. And remember, the entirely self-contained Votrax PS System gets your computer talking without using any valuable computer memory.

Built-in versatility.

Much more than just a voice output device, the Votrax PS System lets you mix either speech and sound effects or speech and music. A programmable master clock and 350 programmable frequencies give you unmatched control of speech and sound effects.

The Votrax PS System offers user expandable ROM for custom applications, user downloadable software and sound effects subroutines for easy user programming. Its programmable speech rate provides more natural rhythm, while 64 programmable amplitude levels give you greater control of word emphasis.

Actual size: 12.2" x 4.5" x 2.6"

Friendly to humans.

Designed to look like a printer to your computer, the Votrax PS System is extremely easy to use. It can be used in tandem with your printer without an additional interface card. Both serial and parallel ports come standard, allowing you to connect the Votrax PS System to virtually any computer. Speech, music and sound effects are only a PRINT statement away.

"listen here"

What to say after "Hello".

Businesses will appreciate spoken data transmission, narration of graphic displays and unmanned, oral product demonstrations. Spoken verification of data input will make computers much easier for the blind to use. School children can receive comprehensive computer instruction with voice textbooks as well as spoken drills and testing. And then, late at night, you can make those adventure games explode.

A quick list.

- ☐ Highly articulate Votrax text-to-speech translator.
- ☐ 350 programmable frequencies for speech/sound effects.
- ☐ 64 amplitude levels.
- ☐ Simultaneous speech and sound effects or speech and music.
- ☐ 8 octave, 3 note music synthesis.
- ☐ Serial and parallel interface standard.
- ☐ User programmable master clock.
- ☐ User defined exception word table.
- ☐ User programmable speech rate, amplitude and inflection.
- ☐ User expandable ROM for custom applications.
- ☐ User downloadable software.
- ☐ 3,500 character input buffer: subdivisible for a printer buffer.
- ☐ Internal speaker and external speaker jack.
- ☐ Real time clock and 8 user defined alarms.
- ☐ Oral power up and error prompting.
- ☐ X-on/X-off and RTS-CTS handshaking.
- ☐ Programmable Baud settings (75-9600).
- ☐ Interrupt driven Z-80 microprocessor.
- ☐ Parallel/Serial interconnect modes.
- ☐ Proper number string translation: the number "154" is pronounced "one hundred fifty four".

To order, see your local computer retailer or call toll-free

1-800-521-1350

Michigan residents, please call (313) 588-0341. MasterCard, VISA or personal check accepted. The price is $395 plus $4 for delivery. Educational discount available. Add sales tax in Michigan and California.

Votrax®

The Votrax Personal Speech System is covered by a limited warranty. Write Votrax for a free copy.
500 Stephenson Highway, Troy, MI 48084

© VOTRAX 1982

Circle 446 on Inquiry card.

www.americanradiohistory.com

following situations we will assume that the table is an ascending linear list in an array data structure. The calling sequence takes for granted a call parameter that contains the prior index returned for a prior search of the entries in the table. The prior index value returned is initialized to 0 if there is no prior search data available and then updated by the searching process:

- If the current index is 0, the midpoint address is recalculated for the next iteration and the process continues.
- If the search argument is not less than the function argument and the low address is less than the high address, the low address is replaced with the midpoint-plus-one entry. The midpoint address is recalculated for the next iteration.
- If the search argument is equal to the function argument in the table, the current midpoint is the value returned to the calling program.
- If the search argument is less than the function argument in the table and the low address is less than the high address, then the high address is replaced with the midpoint address. The midpoint address is recalculated for the next iteration.
- If no entry is found, the current midpoint is set to 0.
- The current midpoint is the value returned to the calling program when all iterations have been completed.

Listing 1: A PL/I procedure that carries out an enhanced binary search. The first line identifies the procedure and its variables and states that it will return a fixed value. The second line declares the variables so the computer can arrange appropriate storage for the kind of values that each variable can assume. ARG represents the search argument (the value being searched for); TABARG, the function argument (the value at the current midpoint address); M, the midpoint address; L, the left (or low) extreme address; and R, the right (or high) extreme address. The procedure works by repeatedly setting the value of one of the extremes (R or L) to the previous midpoint value and then calculating a new midpoint by adding the extremes and dividing by two. Statements between "/" and "*/" are comments.*

```
SEARCH: PROCEDURE(ARG,TABARG,LEFT,RIGHT,M)RETURNS(FIXED);
DCL  (ARG,TABARG(*),LEFT,RIGHT,L,R,M)FIXED;
L=LEFT;
R=RIGHT;
ENHANCE='0'B;
DO WHILE (ENHANCE='0'B);
  IF M=0 THEN
    DO;
      M=(L+R)/2;
      /* LOOP */;
    END;
  ELSE
    DO;
      IF ARG>=TABARG(M) THEN
        DO;
          IF ARG=TABARG(M) THEN
            DO;
              RETURN(M);
            END;
          ELSE
            DO;
              IF L<R THEN
                DO;
                  L=M+1;
                  M=(L+R)/2;
                  /* LOOP */;
                END;
              ELSE
                DO;
                  M=0;
                  RETURN(M);
                END;
            END;
        END;
      ELSE
        DO;
          IF L<R THEN
            DO;
              R=M;
              M=(L+R)/2;
              /* LOOP */;
            END;
          ELSE
            DO;
              M=0;
              RETURN(M);
            END;
        END;
    END;
END;
/* NO SPECIAL TERMINATIONS */;
END;
```

The decision table (table 4) illustrates how to use the enhanced-search process. One of the many possible implementations is illustrated in listing 1.

Conclusion

It is clearly possible to improve the binary search by examining a table entry before doing any computation. The time-saving advantage of this technique ranges from 2 to 30 percent depending on the size of the table and the computing system you use. For tables containing approximately 300 entries, there is a 5 to 10 percent advantage if the probability of a match ranges from 0 (never equal) to 3.25/300 (the 80/20 rule). ■

References

1. Barnes, B. H. and Metzner, J. R. *Decision Table Languages and Systems*. New York: ACM Monograph Series. Academic Press, 1977.
2. Horowitz, E. and Sahni, S. *Fundamentals of Data Structures*. Potomac, MD: Computer Science Press, 1977.
3. Horowitz, E. and Sahni, S. *Fundamentals of Computer Algorithms*. Potomac, MD: Computer Science Press, 1978.
4. Maes, R. "On the Representation of Program Structures by Decision Tables: A Critical Assessment." *Computer Journal*, January 1977.
5. Pryes, N. S. "Automatic Generation of Computer Programs." *Advances in Computers*, Vol. 16, 1977, pp. 57-125.

Circle 215 on inquiry card. ⟶

www.americanradiohistory.com

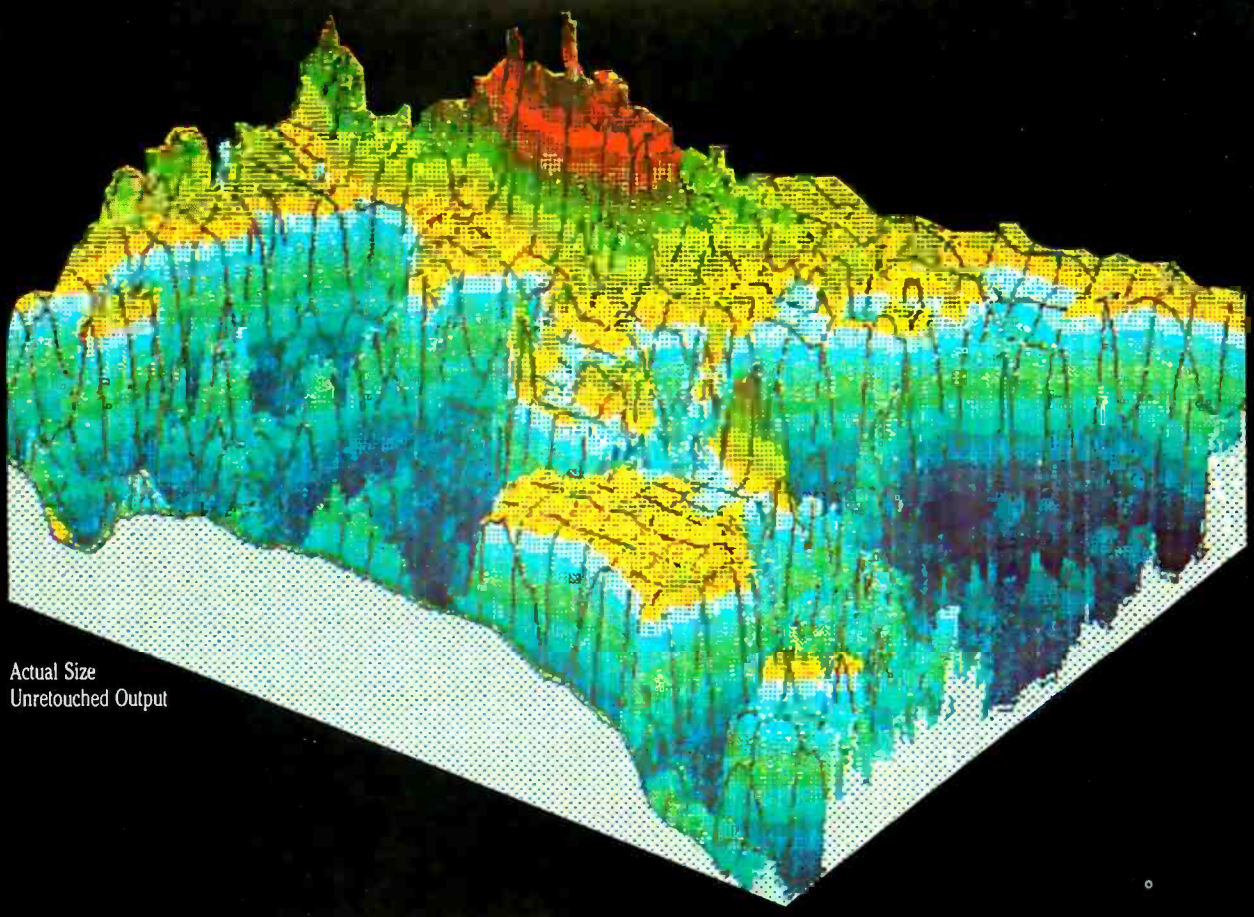

Actual Size
Unretouched Output

COLOR THAT PEAKS FOR ITSELF

EXPLORE THE WORLD OF COLOR OUTPUT WITH THE PRISM PRINTER™. When it comes to color graphics, output quality used to be a function of price. That is, until Integral Data Systems introduced the revolutionary new Prism Printer. The modular design of the Prism Printer now allows you to upgrade by modular components, including the ability to produce brilliant color output at a fraction of the cost of any other color printer/plotter available today.

Prism Printer "paints" in strong, vibrant colors to help display the ups and downs of complex data quickly, point out changes, show trends, and make your point unforgettable, because color communicates. You can produce output quality such as you see in this beautiful graphic representation of the ocean floor made at Woods Hole Oceanographic Institution.

And whether your output requires color or not, that's only one facet of Prism Printer's upgradable flexibility. In addition to Prism Color™, there are other optional modules for virtually any application you can think of—Dot Plot™ graphics, Auto Sheet Feed for single-sheet and letterhead applications, it's companion Cassette Feeder for high volume word-processing applications, special character sets, and more.

All Prism Printers offer as standard features correspondence-quality output in a single pass with our exclusive overlapping-dot Maisey Mode™, and dual-speed capability for high-speed printing of 200 cps with our Sprint Mode™. In addition, we offer software packages which enable you to print color graphics from Apple II™ and the IBM™ Personal Computer.

If you're looking for a new high in your output quality, at a lower price than you thought possible, check out the Prism Printer now at your local dealer. Color that peaks for itself, from the innovator in imaging technology, Integral Data Systems.

PRISM PRINTER™

Integral Data Systems, Inc.

A Whole New Spectrum of Imaging Ideas

Milford, New Hampshire 03055
Telex: 953032
Toll-free 1 (800) 258-1386
NH, Alaska and Hawaii, (603) 673-9100

www.americanradiohistory.com

www.americanradiohistory.com

We don't care which computer you own. We'll help you get the most out of it.

CompuServe puts a world of information, communications, and entertainment at your fingertips.

CompuServe is the versatile, easy to use interactive videotex service designed especially for the personal computer user. It's dynamic, growing and changing daily to satisfy its subscribers' needs. It's an industry leader, created and managed by the same communications professionals who provide business information and network services to over one fourth of the FORTUNE 500 companies.

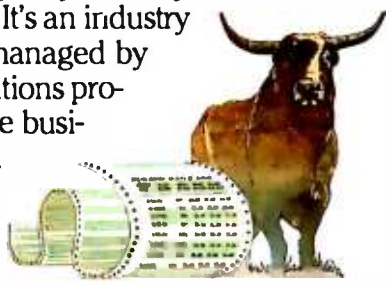

From current events to current assets, CompuServe offers a wealth of useful, profitable or just plain interesting information. Electronic magazines and national news wires plus worldwide weather, current movie reviews, electronic banking and shop at home services, and some of the most sophisticated financial information available are all offered to current subscribers.

From words to music. CompuServe offers a communications network that gives special interest groups from hardware enthusiasts to computer composers a chance to get together. There's a bulletin board for selling, swapping, and personal notices and a CB simulator for real-time communications between subscribers. There's electronic mail, the fastest, surest, way to communicate with other users across the street or across the country, plus file retention and editing, and lots, lots more.

Fun and games are expected whenever computer users interact, and CompuServe has the best. Games you can play alone or with other CompuServe subscribers anywhere in the country. Classic puzzlers, sports and adventure games, and fantastic space games featuring MegaWars, the "ultimate computer conflict."

But, that's just the tip of the chip. CompuServe offers a menu of thousands of items that make subscribing educational, fun and sometimes downright profitable. If you'd like to know more about CompuServe, call toll free, 800-848-8990 to receive an illustrated guide to the CompuServe Information Service. A videotex service for you no matter which computer you own.

CompuServe

P.O. Box 20212
5000 Arlington Centre Blvd., Columbus, Ohio 43220

800-848-8990

In Ohio call 614-457-8650

An H&R Block Company

Circle 94 on inquiry card.

www.americanradiohistory.com

Hayes's Stack Smartmodem

Communicate at 300 or 1200 bps.

Norman C. McEntire
POB 21731
Columbia, SC 29221

Photo 1: *The Smartmodem package includes the modem, a modular telephone cable, an AC line adapter, and an excellent manual. (Photo by Ed Crabtree.)*

At a Glance

Name
Hayes Stack Smartmodem 300 or Smartmodem 1200

Use
Communication over normal (voice) telephone lines

Manufacturer
Hayes Microcomputer Products Inc.
5835 Peachtree Corners E.
Norcross, GA 30092
(404) 449-8791

Price
Smartmodem 300 $289
Smartmodem 1200 $699

Dimensions
1.5 inches high by 5.5 inches wide by 9.6 inches long

Features
0 to 300 bps and 1200 bps direct-connect; accepts ASCII command strings

Hardware needed
RS-232C port and RS-232C cable

I have always admired the Hayes Microcomputer Products' Micromodem II, available as a plug-in board for Apple II computers. The Micromodem II has ideal features: it can run at 300 bps (bits per second), can be connected directly to the telephone line, performs auto-dial and auto-answer functions, has excellent documentation, and is reasonably priced. Because I own a TRS-80 Model I, however, I had to sit back and hope that Hayes would develop a general-purpose modem for use with RS-232C interfaces.

My hopes came true when Hayes announced its Stack Smartmodem. Advertisements claimed that it contained all the desirable features mentioned above, including a unique feature that allowed the use of ASCII (American National Standard Code for Information Interchange) character strings to program the device. What's more, it was available in two versions: a 300-bps Bell 103-compatible unit and one that is also 1200-bps Bell 212A compatible. With my spirits high, I rushed to the computer store and purchased the 300-bps model. I have not been disappointed.

First Impressions

The package contains the Smartmodem, a modular telephone cable, an AC line adapter, and the owner's manual. These items are shown in photo 1.

The Smartmodem is attractively styled. Its dimensions of 1.5 by 5.5 by 9.6 inches ensure that it takes up little space. The design is such that either a regular telephone or another Hayes Stack product—such as the Hayes Chronograph clock/calendar—can be placed on top of it. With a color scheme of gray and black, the Smartmodem blends with almost any environment.

www.americanradiohistory.com

REWARD.

Find great bargains in this list and reap the rewards: immediate availability, 24-hour express delivery, toll-free technical support, and special volume discounts.

DATABASE MANAGEMENT

dBase II-Ashton-Tate	$ 475
Condor II-Condor Computer Corp.	$ 450
Data Star-MicroPro	Call For Price
Easy Filer-I.U.S.	$ 280
VisiFile-VisiCorp	$ 190

SPREADSHEETS/ CALCULATORS

SuperCalc-Sorcim	Call For Price
VisiCalc 256K-VisiCorp	$ 195
Calc Star-MicroPro	Call For Price
Multiplan-Micro Soft	$ 225

COMMUNICATIONS

Emulink (IBM PC 3270) Micro Link Corp	$ 995
Emulink (Apple 3270) Micro Link Corp	$ 795
Crosstalk-Micro Stuf	$ 120
BSTAM-Byrom Software	$ 150

WORD PROCESSING/SPELLING

Wordmate-Softword Systems	$ 495
Wordstar-MicroPro	Call For Price
Mailmerge-MicroPro	Call For Price
Wordstar/Mailmerge-MicroPro	Call For Price
Spellbinder-Lexisoft	$ 295
Easywriter II-I.U.S.	$ 265
The Final Word-Mark of the Unicorn	$ 245
Select w/Superspell-Select Info. Sytems	$ 395

WANTED

Help in reducing our inventory. Pick up one of these specials and take advantage of a great price!

CROSSTALK MicroStuf	**$120**
dBASE II Ashton-Tate	**$475**
SUPERCALC Sorcim	**Call For Price**
WORDMATE (IBM PC) From Softword Systems—the professional's choice in IBM PC word processing.	**$495**

LANGUAGES/ UTILITIES

C Basic-Digital Research	$ 125
M Basic-Micro Soft	$ 275
CB 80-Digital Research	$ 420
Basic Compiler-Micro Soft	$ 310
Fortran 80-Micro Soft	$ 395
Cobol 80-Micro Soft	$ 575
Pascal MT+-Digital Research	$ 425
PL-1 80-Digital Research	$ 420

MISCELLANEOUS

Milestone-Organic Software	$ 245
StatPak-NW Analytical	$ 395
VisiSchedule-VisiCorp	$ 245
VisiTrend/Plot-VisiCorp	$ 245
Supersort-MicroPro	Call For Price
Datebook-Organic Software	$ 245

MODEMS

Hayes Micromodem II	$ 275
Hayes Smartmodem 300	$ 212

PRINTERS

Epson MX80 FT	$ 555
Epson MX100 FT	$ 745
IDS Prism 80	$1335
Okidata 82A	$ 439
Okidata 83A	$ 705
NEC 3550 33cps wp	$1900

Call toll-free 800-328-2260
(In Minnesota, 612-544-3615)

American Express • MasterCard • VISA
3.5% surcharge on all credit orders.

Purchase orders accepted from corporate accounts. All orders are shipped UPS. $3 shipping charge on software items. 2% shipping charge on hardware items.

DATASOURCE
DATASOURCE SYSTEMS MARKETING CORP.
1660 South Highway 100, Minneapolis, MN 55416

Circle 139 on inquiry card.

www.americanradiohistory.com

56 page FREE catalog

Business Forms and Supplies for MICRO Computers

Save money. Your firm name and address printed on standardized, continuous checks, invoices, statements, letterheads and labels.

Designed to work with programs from over 200 software sources . . . or program to our attractive forms yourself with guides provided.

Full color catalog also has stock tab paper, envelopes, diskettes, many other supplies and accessories.

- Quality products at low prices
- No "handling charges" or hidden extras
- Available in small quantities
- Money-Back Guarantee

Fast service . . . buy direct by mail or
PHONE TOLL FREE
1 + 800-225-9550
(Mass. residents 1 + 800-922-8560)
8:00 A.M. to 5:00 P.M., ET

NAME PHONE

COMPANY

STREET

CITY, STATE and ZIP

Required to help us send you correct information:

SOFTWARE BRAND PACKAGE# ☐ Do own programming.

COMPUTER MAKE MODEL# ☐ Have not purchased yet.

YOUR LINE OF BUSINESS Number of employees.

11103

Nebs Computer Forms

12 South Street, Townsend, Massachusetts 01469
A division of New England Business Service, Inc.

Symbol	Name	Use
AA	Auto Answer	When illuminated, signals that the Smartmodem is in auto answer mode. When the telephone rings, the AA LED blinks at the rate of the ringing signal. When this indicator is off, the Smartmodem does not automatically answer.
CD	Carrier Detect	Illuminates when the Smartmodem detects a carrier from a distant modem.
OH	Off Hook	If the "phone" is off-hook, this LED illuminates. The LED is always on when the Smartmodem is using the telephone line.
RD	Receive Data	This LED blinks while sending data or command results from the Smartmodem to the RS-232C port.
SD	Send Data	Blinks while data or commands are sent from the terminal to the Smartmodem.
TR	Terminal Ready	Indicates the status of the RS-232C signal DTR (data terminal ready), pin 20 of the RS-232C connector. As shipped from the factory, the DTR signal is ignored and TR is always illuminated; setting configuration switch S1 in the "up" position forces the Smartmodem to monitor the DTR signal.
MR	Modem Ready	Indicates the Smartmodem is turned on.

Table 1: *Summary of the Smartmodem's status indicators.*

As shown in photo 2a, the front of the Smartmodem contains seven LED (light-emitting diode) status indicators. From left to right, they are: AA (auto-answer mode), CD (carrier detect), OH (off hook), RD (receive data), SD (send data), TR (terminal ready), and MR (modem ready). The LEDs allow the operator to visually monitor the operating status of the Smartmodem. The operation of each LED is explained in table 1.

Also at the front, behind the front cover, are eight *configuration switches* that determine the power-up setting for some of the Smartmodem's operating parameters. These switches are explained in table 2. Most of the switch settings can be changed under software control.

Photo 2b shows the back panel. From left to right are the power switch, power connector (for the AC line adapter), RS-232C connector (for connection to your computer system via a user-supplied RS-232C cable), telephone connector (for one end of the modular telephone cable), and the volume-control knob.

The Smartmodem's RS-232C connector is wired for connection to DTE (data terminal equipment), which

Circle 302 on inquiry card.

www.americanradiohistory.com

IBM, APPLE and ATARI USERS

CompuShack announces

SOFTware war

SOFTWARE FOR YOUR IBM PC

Continental - The Home Accountant $99.95
Datamost - Write On / Word Processor $109.95
Denver Software -
Easy Effective Accounting System $599.00
ISM
Mathmagic $79.00
Graphmagic $79.00
Infocom
Zork I $29.95
Zork II $29.95
Deadline $39.95
Information Unlimited
Easy Filer $299.00
Easy Planner $159.00
Easy Speller $139.00
Easy Writer II $259.00
Micro Lab - Tax Manager $199.00
Micro Pro
Wordstar $299.00
Mailmerge $99.00
Peechtree
General Ledger $499.00
Accounts Receivable $499.00
Accounts Payable $499.00
Sir Tech - Galactic Attack $29.95
VisiCorp
256K Visicalc $199.00
Visitrend/Visiplot $259.00
Visidex $199.00
Visifiles $259.00

SOFTWARE FOR YOUR ATARI 400/800 PERSONAL COMPUTER

Asteroids $27.95
Centipede $35.95
Pac-Man $35.95
Blackjack $15.95
Caverns of Mars $32.95
APEX CASSETTES
Avalanche $19.95
Outlaw/Howitzer $19.95
747 Landing Simulator $19.95
Eastern Front $23.95
Dog Daze $19.95
Reversi II $19.95
Blockbuster $15.95
7-Card Stud $15.95
Downhill $19.95
Video Math Flash Cards $15.95
Letterman $19.95
Wordmaker $19.95
Cubbyholes $19.95
DISKETTES
Data Management System $19.95
Family Cash Flow $19.95
Family Budget $19.95
Advanced Music System $25.95
Eastern Front $25.95
Supersort $19.95
Insomnia $19.95

SOFTWARE FOR YOUR APPLE II + ART-SCI INC.

Magic Window $79.00
Magic Mailer $49.00
Magic Words $49.00
Magic Pak — Includes All Three $157.00
Magic Window II $119.00
ASHTON-TATE
Dbase II (Apple) $499.00
Dbase II (Apple 48K) $299.00

We Are The Systems Specialist

CONTINENTAL SOFTWARE
First Class Mail $59.95
CPA I General Ledge $199.00
CPA II Accounts Receivable $199.00
CPA III Accounts Payable $199.00
CPA IV Payroll $199.00
CPA V Property Management $399.00
The Home Accountant $59.95
The Home Accountant Plus $119.00
DAKIN 5 CORPORATION
Depreciation Planner $299.00
Budget Planner $119.00
Business Bookkeeping System $299.00
HAYDEN
Applesoft Compiler $159.00
IMS
Graph Magic $69.95
Math Magic $69.95
LIGHTNING SOFTWARE
Master Type (Hi-Res) $29.95

MICRO PRO
Word Star Customization Notes $299.00
Wordstar $199.00
Super Sort $129.00
Mail Merge $89.00
Data Star $199.00
Spell Star $129.00
Calc Star $129.00
Word Star Training Guide $19.95
Word Star Update $69.00

MICROSOFT
Time Manager $129.00
Fortran $159.00
A.L.D.S. $99.00
Basic Compiler $299.00
muMath/muSimp $185.00
COBOL $499.00
M/SORT $149.00
TASC $149.00
Multiplan (Native Apple) $199.00
Multiplan $199.00

SOFTWARE FOR YOUR APPLE II + ON-LINE SYSTEMS

Screen Writer II $99.00
The General Manager $119.00
The Dictionary $79.00
Speed-ASM $29.95
Expediter II $79.00
Memory Management II $39.00
Lisa 2.5 ..... $59.00
Lisa Educational System $79.00
PEECHTREE SOFTWARE
General Ledger $299.00
Accounts Receivable $299.00
Accounts Payable $299.00
Inventory $299.00
Payroll $299.00
Peachcalc Electronic Spreadsheet $289.00
Telecommunications $289.00
Spelling Proof Reader $250.00
Mailing List Manager $289.00
Peachtext $350.00
SENSIBLE SOFTWARE
Back It Up $49.95
Disk Recovery $19.95
Disk Organizer II $19.95
Multidisk Catalog $17.95
Super Disk Copy $25.95
Sensible Speller $89.95
Sensible Speller Supertext Format $89.95

SOFTWARE PUBLISHING COMPANY
Personal Filing System $89.00
Personal Report System $65.00
Graph $79.00
SORCIM CORPORATION
Supercalc $215.00
STONEWARE
Stat Pac $69.00
D B Master $145.00
D B Utility Pack $69.00
D B Utility Pack II $69.00
Graphic Processing System Standard $49.00
Graphic Processing System Professional $69.00
SYSTEMS PLUS
General Ledger $249.00
GL/AR/AP $599.00
GL/AP/AR/Inventory $699.00
VISI CORP
Visifiles $189.00
Desktop Plan $189.00
Visiplot $149.00
Visidex $189.00
Visicalc 3.3 ..... $189.00
Visischedule $219.00
Business Forecasting Model $75.00
Visilink $189.00

COMPUSHACK
Business Home Computers
2630-H Walnut Avenue, Tustin, CA 92680
(714) 730-7207 Telex 18-3511 Ans Bck ESMA

www.americanradiohistory.com

Switch	Down	Up
S1	Ignores the RS-232C DTR signal.	Monitors the RS-232C DTR signal.
S2	Responds with number result codes.	Responds with ASCII character-string result codes.
S3	Sends result codes to the terminal.	Does not send result codes to the terminal.
S4	Does not echo command characters to the terminal.	Echoes command characters to the terminal.
S5	Does not automatically answer the telephone.	Automatically answers the telephone.
S6	Does not monitor the RS-232C CD (carrier detect) signal.	Monitors the RS-232C CD signal.
S7	For use with RJ12 and RJ13 telephone jacks.	For use with RJ11 telephone jacks.
S8	Not used.	

Table 2: *Summary of the Smartmodem's configuration switches. Boldfaced entries are default settings as shipped from the factory. All functions can be changed under software control.*

(2a)

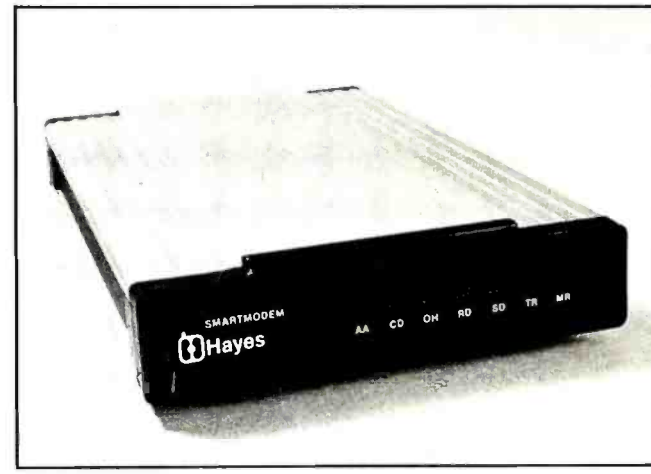

(2b)

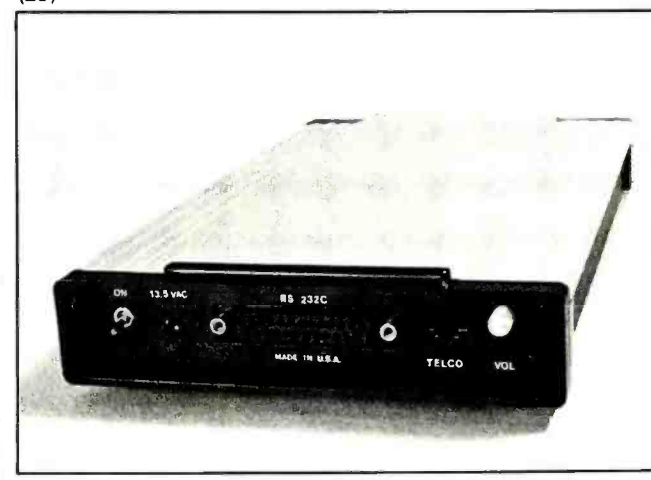

Photo 2: *Front and rear views of the Smartmodem. In photo 2a, the seven LED status indicators are visible; photo 2b shows the power control, power connector, and RS-232C connector.*

works with 99 percent of terminals and RS-232C interfaces; a slight wiring change allows the use of this modem with DCE (data communications equipment). The volume-control knob allows you to adjust the volume level of the audio monitor.

The power connector is U. L. (Underwriters' Laboratories) listed at 120 volts (V) AC, 60 Hz, with a 13.5-V AC output. The supplied telephone cable is normally connected to an RJ11 modular telephone jack. Changing the setting of configuration switch 7, however, allows the use of either an RJ12 or RJ13 telephone jack.

Documentation for the Smartmodem consists of a single owner's manual with fine-quality print. In addition, it is a spiral-bound manual; this makes it easy to use while sitting at the computer.

Installing the Smartmodem

Connection of the Smartmodem is easy. Connect the AC line adapter, the telephone cable, and an RS-232C cable to their appropriate connectors. In my case, the RS-232C cable connects the Smartmodem to the expansion interface of a TRS-80 Model I. The expansion interface

DEVELOPMENT HARDWARE/SOFTWARE
GTEK MODEL 7128 EPROM PROGRAMMER

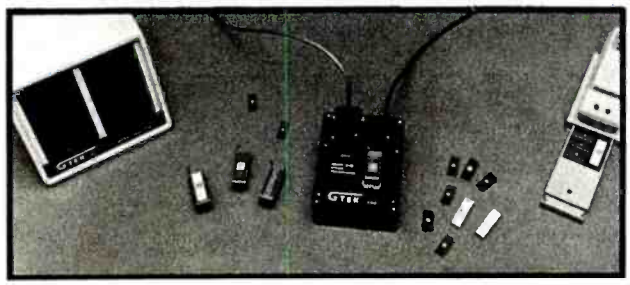

- Microprocessor based intelligence for ease of use and interface. You send the data, the 7128 takes care of the rest.
- RS-232 interface and ASCII data formats make the 7128 compatible with virtually any computer with an RS-232 serial interface port.
- Auto-select baud rate.
- Use with or without handshaking. Bidirectional Xon/Xoff supported. CTS/DTR supported.
- Devices supported as of DEC 82.

NMOS	NMOS	CMOS	EEPROM	MPU'S
2758	2508	27C16	5213	8748
2716	2516	27C32	X2816	8749
2732	2532	C6716	48016	8741
2732A	2564	27C64		8742
2764	68766			8751
27128	8755			8755

- Read pin compatible ROMS also.
- Automatic use of proper program voltage based on type selected.
- Menu driven eprom type selection, no personality modules required. (40 pin devices require adapter)
- INTEL, Motorola and MCS-86. Hex formats. Split facility for 16 bit data-paths. Read, program, and formatted list commands also.
- Interupt driven type ahead, program and verify real time while sanding data.
- Program single byte, block, or whole eprom.
- Intelligent diagnostics discern between eprom which is bad and one which merely needs erasing.
- Verify erasure and compare commands.
- Busy light indicates when power is being applies to program socket.
- Complete with TEXTOOL zero insertion force socket and integral 120 VAC power supply. (240 VAC/50HZ available also)
- High Performance/Cost ratio.

●●● Model 7128 PRICE $389.00 ●●●

MODEL 7128 SOCKET ADAPTERS
MODEL 481 allows programming of 8748, 8749, 8741, 8742 single chip processors. Price $98.00

MODEL 511 allows programming the 8751, Intel's high powered single chip processor. Price $174.00

MODEL 755 allows programming the 8755 EPROM/IO chip Price $135.00

MODEL 7128/24 - budget version of the 7128. Supports 24 pin parts thru 32K only. Upgradable to full 7128 capacity. Price $289.00

Non-expandable, very low cost models available for specific devices.
MODEL 7128-L1 for 2716 only $149.00
MODEL 7128-L2 for 2732 only $179.00

Also available from stock:
Eprom Erasers UVP model DE-4 . . $78.00
Avocet Systems Cross Assemblers $200.00
RS-232 Cable Assemblies $25.00
Programmable Devices . . . . . call
Complete development systems . $3240.00

GTEK INC.
Post Office Box 289
Waveland, Mississippi 39576
(601) 467-8048

Circle 194 on inquiry card.

www.americanradiohistory.com

SAGE TECHNICAL BRIEFING

SYSTEM DESIGN, SAGE IV

Meet The New Giant Of The Microcomputer Industry. All 4.8 x 12.5 x 16.75" Of It.

The challenge was to create a computer having room for a megabyte of RAM, a built-in Winchester with floppy backup, and the ability to perform 2,000,000 instructions per second.

A small miracle, in other words.

And small is exactly what it turned out to be. In fact, the 16-bit Sage IV, including all of the above attributes, takes up less than ½ cubic foot.

What made such a breakthrough possible? System design.

It took the latest in memory and processor technology, plus Winchester technology. And it took a highly integrated, closely packed, low power, high speed design incorporating a proprietary bus.

Now the Sage IV is ready for you. Actually, you can choose from three different Sage IV models to meet your exact needs—configurations with a 5 megabyte Winchester plus 640K floppy right on up to a combination of four fixed or removable Winchesters plus one or two floppies (200 megabytes of disk capacity in all).

Because of the Sage IV's no-compromise system design you can load a 16K program in 1/10 second from Winchester disk.

What's more, there are over 120 sources for existing popular programs for the Sage IV. The incredible p-System operating system, standard on every Sage IV converts software that was originally written for 8-bit computers in Pascal, BASIC and Fortran. Optionally, CP/M, Modula, and Hyper-Forth are also available.

Better yet, our small miracles come with prices to match.

So give us a call or write today for more Sage IV information and the name of your nearest dealer.

Sage Computer Technology, 35 North Edison Way, #4, Reno, NV 89502 (702) 322-6868.

In Europe: TDI LTD, 29 Alma Vale Road, Clifton, Bristol BS8-2HL Tel: (0272) 742796.

SAGE COMPUTER TECHNOLOGY®

Circle 383 on inquiry card.

www.americanradiohistory.com

ASCII Command String	Use
A	:Answer the telephone immediately.
A/	:Redial the last number.
Cn	:Enable/Disable the transmitter carrier.
,	:Pause for a given amount of time.
Ds	:Dial a number.
Fn	:Set half or full duplex.
Hn	:Enable or disable switch hook.
Mn	:Enable or disable the audio monitor.
O	:Return to the "on-line" state.
P	:Enable pulse dial.
Qn	:Enable or disable the return of result codes.
R	:Enter answer mode after dialing a number.
Sr?	:Read the value of register Sr.
Sr=n	:Assign the value n to register Sr.
;	:Return to command state after dialing a number.
T	:Enable tone dialing.
Vn	:Select method of sending result codes.
Z	:Perform a software reset.

Table 3: *Summary of the Smartmodem's commands.*

contains the standard TRS-80 RS-232C board. After the connections are made, the Smartmodem is ready for use.

Use of the Smartmodem

As stated earlier, the Smartmodem can be used with any RS-232C interface. I use the standard TRS-80 setup with the TERM program. TERM is a Z80 machine-language program that transforms the Model I into a "dumb" terminal.

Once the connections are correct and TERM is executing, two LEDs on the Smartmodem will light: MR (modem ready) and TR (terminal ready). Proper operation is assured by typing the following:

<enter>
AT <enter>

(The AT stands for attention.) If all is well, the Smartmodem will respond with the ASCII string OK and will be ready to accept a command.

The procedure just described demonstrates the most unique feature of the Smartmodem: you can immediately communicate with it without writing any special software! Because this modem accepts ASCII strings as commands, you can sit at your computer or terminal and issue one command after another. The Smartmodem takes each command and executes it. After each command, it responds by sending back one of five possible ASCII strings: OK, CONNECT, RING, NO CARRIER, or ERROR.

A brief description of the commands is given in table 3. To see how easy it is to operate the Smartmodem, let's try some examples. Suppose you want to use the auto-dial feature. To dial the number 960-1700, simply type

AT D T 960-1700 <enter>

for tone dialers, or

AT D P 960-1700 <enter>

for pulse dialers. After you press <enter>, the Smartmodem proceeds to dial the number. After dialing, it waits for the other end to answer. When the other end answers, it detects the carrier and sends the ASCII string CONNECT back to the terminal. If the telephone is not answered or if no carrier is detected, the Smartmodem sends back the ASCII string NO CONNECT.

The audio monitor is useful when dialing a number. Under normal operation, the audio monitor is enabled in the off-hook condition. This allows you to monitor the dial tone, ringing, busy tone, and carrier tone. After detecting the carrier, the Smartmodem normally disables the audio monitor; however, the monitor can be enabled or disabled by sending the M command

AT Mx <enter>

where x is 0, which means speaker is off; x is 1, which means speaker off until carrier detect; or x is 2, which means speaker always on.

Suppose you want the Smartmodem to answer the telephone on the fourth ring. The ASCII command string is

AT S0=4 <enter>

PROGRAMMERS FLIGHT SIMULATOR
Apple II Plus DOS 3.3 48K

This total IFR System disk features gobs of menu selectable flight programs each with breath taking realistic picture graphics, moving scenery, airport approaches, holding patterns and much much more.

$50.00 At your Computer Store or direct from
Visa Mastercard
Programmers Software
2110 N. 2nd Street
Cabot, Arkansas 72023
(501) 843-2988

 Circle 361 on Inquiry card.

www.americanradiohistory.com

Performance Breakthrough...

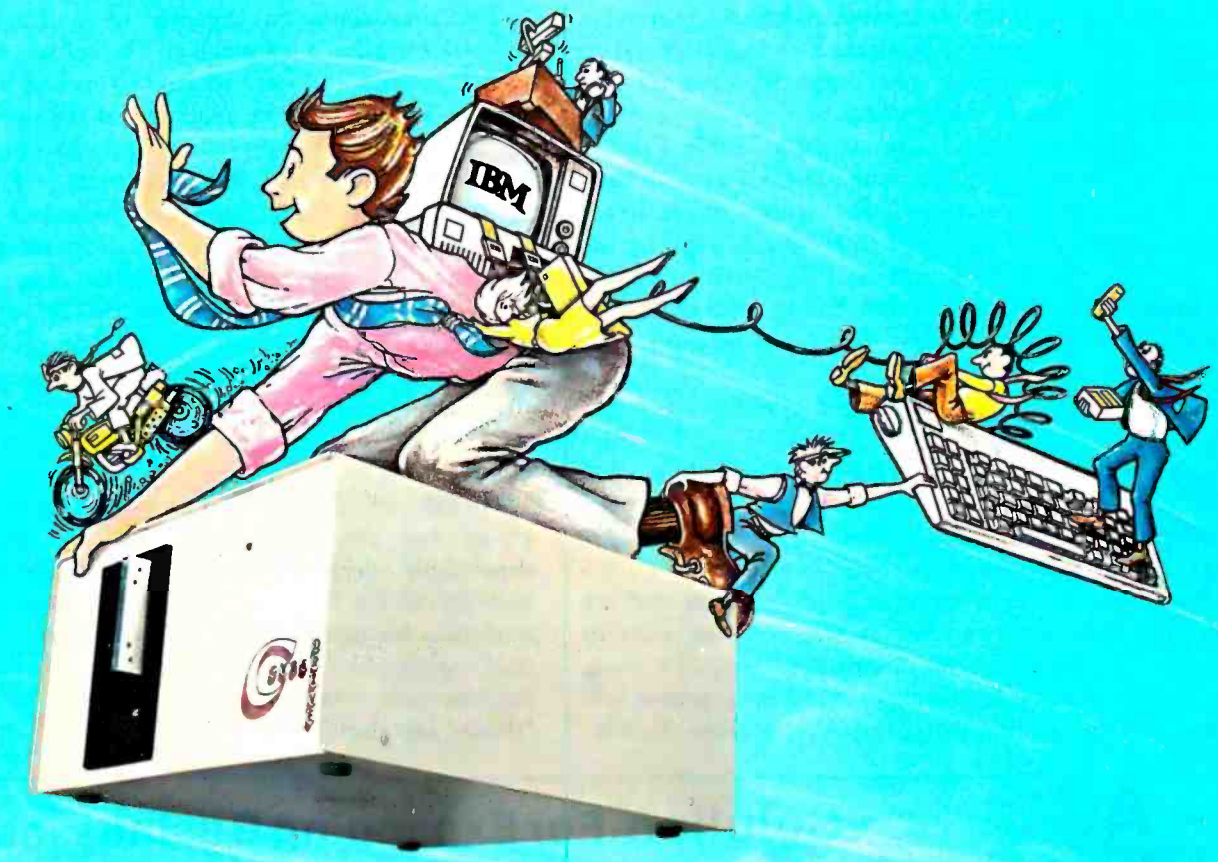

...the CYBERDRIVE™ for the IBM Personal Computer

13.5 or 27 million bytes of disk capacity in a single cabinet with an integrated mini-cartridge tape for secure data backup.

Setting an exciting new microcomputer standard, the CYBERDRIVE[1] combines a full package of features.

It offers new, higher performance levels, with an integrated business-oriented backup device.

As the **CYBERDRIVE** is made available for other systems, media transfer is assured regardless of the host hardware or Operating System.

The CYBERDRIVE slashes the seek time dramatically—e.g. the usual 5 Megabyte stepper-motor Winchester disk offers average seek time typically in the range of 100 to 200 milliseconds (incl. head settling).

With the **CYBERDRIVE,** the average seek time across more than five times as much data is only 33 milliseconds (incl. head settling).

This basic speed, coupled with disk cache buffering and a peak transfer rate of 1 million bytes per second, make the CYBERDRIVE a performance champ!

The integrated mini-cartridge tapes used for backup of data allow dumping of (for example) 10 million bytes of data in about 10 minutes... much faster than other tape or floppy disk backup techniques. Hardware read-after-write error checking is incorporated in the tape device.

...And don't fail to ask about our superb lineup of serious business software (also offered in **CYBERDRIVE** format) including:

RM/COBOL[2] compiler-the micro industry standard.

MBSI[3] **RM/COBOL** general business applications (derived from **MCBA**[4] minicomputer packages)... thousands in use... money back guarantee... source program license.

CRT![1] from Cybernetics (COBOL Reprogramming Tool!)-Program generator for **RM/COBOL** to ease program development and maintenance . . . an alternative to a Data Base System.

CBASIC2[5] **& CBASIC86**[5] compilers... for aficionados of a useful BASIC.

The software is available on a variety of industry-standard Operating Systems including CP/M[5]-MP/M[5] (both -80 & -86), OASIS[6], PCDOS, and UNIX[7]. Inquire for specific details and prices.

Trademarks of: 1 - Cybernetics, Inc 2 - Ryan-McFarland Corp 3 - Micro Business Software, Inc. 4 - Mini-Computer Business Applications, Inc 5 - Digital Research, Inc 6 - Phase One Systems, Inc 7 - Bell Laboratories

© Copyright 1982 by Cybernetics Inc. All rights reserved.
Prices and specifications subject to change without notice.

CYBERNETICS IN C

8041 NEWMAN AVE., SUITE 208
HUNTINGTON BEACH, CA 92647
714/848-1922

www.americanradiohistory.com

This command results in the enabling of the AA (auto-answer-mode) LED. When the telephone rings, the AA LED blinks *off* at the rate of the ring. In addition, each ring sends the string RING to the terminal. On the fourth ring, the Smartmodem answers the telephone and enables the carrier signal. If the other modem does not respond in a given amount of time (the amount of time is programmable), the Smartmodem hangs up and sends the NO CONNECT string to the terminal.

Many other commands are available. Table 3 shows commands to set half or full duplex, to answer or to hang up, to redial, and to set the various status registers. In addition, you can mix pulse and tone dialing, allowing use of the Smartmodem in certain PBX (private-branch-exchange) systems that use pulse dialing; after pulse dialing the PBX access code, tone dialing can be used:

AT D P9, T960-1700 <enter>

There is no explicit command for switching between 300 and 1200 bps; the Smartmodem recognizes the speed from your initial command and adjusts itself accordingly, even in auto-answer mode.

Even with the many commands and options that are available, the Smartmodem is simple—even fun—to operate. The beginner can immediately control it using the simple commands; the experienced programmer will enjoy learning all the commands and options. Finally, programmers will find that the high-level commands available will simplify their applications programming tasks.

Documentation

The documentation consists of a single owner's manual, but what a manual it is! The manual is extremely well organized and easy to read. You can immediately use the Smartmodem by reading just the first few chapters. Indeed, you will probably get the modem operating 15 minutes after taking it out of the box! The first few chapters contain installation and command guidelines, while the later chapters contain in-depth information on commands and configuration switches. Also, the appendixes contain information such as RS-232C connections, telephone information, an ASCII code table, a block diagram, a quick reference card, and a warranty card (two-year warranty).

Conclusions

The Hayes Smartmodem is an excellent buy. It is nicely styled, has very good documentation, and provides dependable operation. Also, the ASCII-string programmability of the Smartmodem gives easy control of its numerous features. If you are in the market for an RS-232C-compatible modem, certainly give the Hayes Smartmodem consideration. After all, "smart" beats "dumb" any day. . . .■

The ACTION Solution For Expanding Businesses...

The DISCOVERY 500, a fully integrated desktop computer with 5¼" hard and floppy disks, supports up to 7 users. It is the ideal, low cost turnkey business system. The full size DISCOVERY supports up to 16 users with a wide variety of disk and tape subsystems. And remember, all DISCOVERY users have their own dedicated memory and 8-bit or 16-bit CPU, running CP/M-80* or CP/M-86*. Action's own multiuser multiprocessor operating system, the dpc/os™ makes it easy.

The dpc/net™ low-cost local area networks of multiple DISCOVERYs provide the ultimate in performance. Up to 150 users in 10 DISCOVERY systems can be on-line simultaneously with full resource sharing. For the first time, mainframe capability at micro prices.

*CP/M is a reg. TM of DIGITAL RESEARCH CORP.

From single-user workstations to multiuser Systems & Networks, our DISCOVERY MULTIPROCESSOR is designed to grow by leaps and bounds. No more obsolete hardware or software. As your business expands... DISCOVERY expands with you!

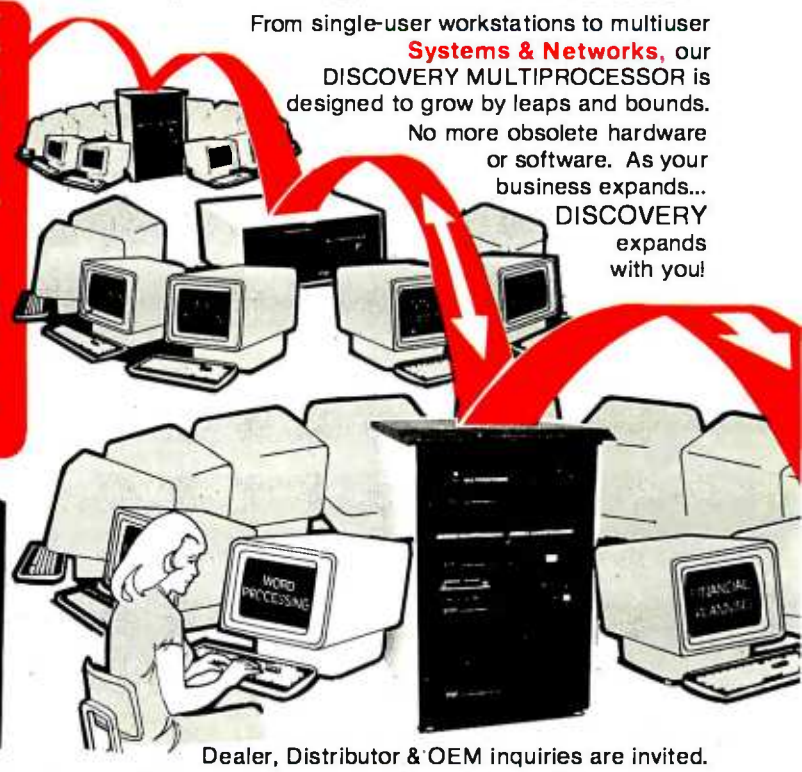

Dealer, Distributor & OEM inquiries are invited.

Step into the future...Take Action Today! Call (213) 793-2440

Action Computer Enterprise, Inc.
55 West Del Mar Blvd. Pasadena CA 91105 USA
TWX 910-588-1201 ACTION PSD O (213) 793-2440

On the East Coast: MicroSystems International O (617) 655-9595
In Canada: CESCO Electronique LTEE O Montreal, Canada O (514) 735-5511
In Asia: Pacific Trading & Agency Ltd. Hong Kong TWX 75332 PACIC HX Tel. 5-440071

Circle 482 on inquiry card.

www.americanradiohistory.com

New Super Expander Plus™ pre-boot for Ramex-128™ board upgrades any Apple II™ 16-sector VisiCalc™ to look like the Advanced Version.

SUPER EXPANDER PLUS keeps all your existing VisiCalc facilities, and adds variable column width, global formatting of numbers, negative numbers in brackets, password protection, new format commands, tabbed fields, the works. It even supports an 80-column card if one is present.

If 136K is enough, you can get all these features with just one Ramex-128 board. But SUPER EXPANDER PLUS supports **two** Ramex-128K cards to give you an incredible 255K VisiCalc File, and dumps the whole model back and forth to floppies **in less than 40 seconds**.

There's simply **no** other memory-expansion/software combination that even comes close. All the others give you less memory, take longer to load and save (as much as fifteen minutes longer), and cost more for what you get. You've got to see it to believe it. Quick! Call your dealer.

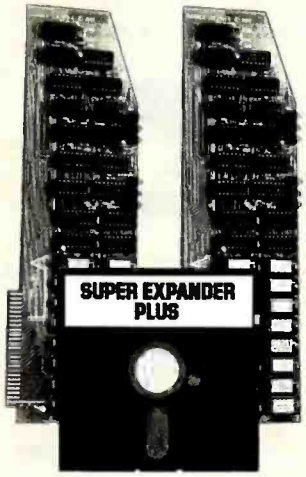

SUPER EXPANDER PLUS™

Ramex-128 card, just $499.
SUPER EXPANDER PLUS, just $125.

OMEGA MICROWARE, INC. T.M.
222 SO. RIVERSIDE PLAZA
CHICAGO, IL 60606
312-648-4844

MasterCard and Visa holders order **toll-free 1-800-835-2246**

Following our long-established Omega MicroWare policy, present Super Expander-40 and -80 owners may upgrade for the price difference only. Phone our office for details.

Apple is a registered trademark of Apple Computer, Inc. VisiCalc is a registered trademark of VisiCorp, Inc. Super Expander Plus, Ramex-128, and Omega MicroWare are trademarks of Omega MicroWare, Inc.
© 1983 Omega MicroWare, Inc.

Circle 321 on inquiry card.

www.americanradiohistory.com

OUR PRICES, SELECTION AND SAME-DAY SHIPPING MAKE US COMPETITIVE.

Red Baron. Home of the Nation's

NEC 8023/TEC M-8510
Outstanding Graphics, Print Quality & Performance



144 x 160 dots/inch • Proportional spacing • Lower case descenders • N x 9 dot matrix • 8 character sizes • 5 unique alphabets • Greek character set • Graphic symbols • 100 CPS print speed • Bi-directional, logic-seeking • Adjustable tractors • Single-sheet friction feed • Vertical & horizontal tabbing

$Call

IDS Prism 80/132
Affordable Color, Speed



200 CPS • Bi-directional, logic-seeking • 24 x 9 dot matrix • Lowercase descenders • 8 character sizes • 80-132 columns • Proportional spacing • Text justification • Optional color and dot resolution graphics

Prism 80 . . . . . .Base List $1,299
Prism 132 . . . . . .Base List $1,499

$Call

The Epson Series
High-Quality Printers at a Low Price.

160 CPS • Dot graphics • Proportional spacing • Downloadable character sets • 10 and 12 CPI • Super/subscripting • Underlining • Reverse line feed

Epson FX series . . . . . **$Call**

Full Line of Epson Accessories

Smith-Corona TP-1
Daisy Wheel Printer For Under $900



Letter quality • Standard serial or parallel data interface • Drop-in ribbon • 144 WPM • Various fonts available • Loads paper like typewriter • Handles single sheets for forms

Smith-Corona TP-1. . . . .List $895 **$Call**

Brothers HR-1 Daisy Wheel
Perfect for quality, quiet word processing.

• 16 CPS • Prints up to 6 copies • Bi-directional • Cloth or carbon quick-change cassette ribbon • Quiet, efficient operation for word processing

Brothers HR-1
Parallel . . . . . .List $1,100
Serial . . . . . .List $1,200 **$Call**

Star Micronics Gemini 10/15

120 x 144 dot graphics • 100 CPS • 2.3K buffer • 2K User programmable ROM • Underlining • Super/subscripts • Friction feed and adjustable tractors

Gemini 10 . . . . . .
Gemini 15 . . . . . .

Lowest Priced Dot Matrix

Anadex Silent Scribe
The Quiet Serial Matrix Impact Printer

Up to 500 CPS • Dot addressable graphics • Parallel and serial interfaces standard • Switch selectable protocol • Cartridge ribbon • Foreign character sets • Underlining • 1.5k to 12k buffer • Correspondence quality print

	List	Discount
Anadex DP-9501A	$1,725	$1300
Anadex DP-9620A	$1,845	$1,475
Anadex WP-6000.	$3,250	$Call

Televideo CRT's
Price, Performance & Reliability

	List	Discount
910	$ 699	$575
925	$ 995	$730
950	$1195	$945
970	$1495	$Call

Monitors
Crisp, Clear, Compatible

Amdek
Video 300, green. . . . . .List $249
Color I . . . . . .List $499

$Call for low prices

www.americanradiohistory.com

OUR PEOPLE MAKE US EXPERTS.

Largest Computer Printer Inventory.

The Grappler+™
Apple® Graphics Interface



• Graphic and text screen dumps • Dual Hi-Res Graphics • Printer selector dip switch • Apple III compatible* • Inverse graphics • Emphasized graphics • Double size picture • 90° Rotation • Center graphics • Works with Pascal and CPM® • Optional bufferboard available

Grappler + ... **$175**

*Requires software driver
Apple is a registered Trademark of Apple, Inc.

The Bufferboard™
For Apples and Printers

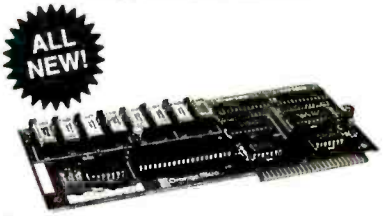

Take your existing printer interface—and buffer it!

• Versions for Grappler +, Apple interface, Epson interface, and others • Comes standard with 16K buffer • Expandable to 32K and 64K • Includes interface docking cable

The Bufferboard **$175**

IDS Microprism 480
Prints like a daisy, priced like a matrix!

• Correspondence quality in a single pass • Dual speed 75, 110cps • Proportional spacing • Bi-directional, logic-seeking • Platen Pin or pressure feed • 24 x 9 dot matrix • 10, 12, 16.8 characters per inch • Double width characters

IDS Microprism 480 .... List $799 **$Call**

Customer Benefit Package

1. Free Expert Consultation. 2. Technical Staff. Even your most involved questions get quick, helpful answers from our staff of printer technicians. **3. Free Catalog.** Get your informative catalog with printer comparison chart and print samples today. **4. Warranty.** The manufacturer's warranty where applicable. **5. Same-Day Shipping. 6. Free MasterCard and Visa. 7. We Stock What We Sell.** We make every effort to keep a large stock of our advertised products. **8. APO/FPO Orders Welcome.**

The Okidata Series
Hi-Res or TRS 80 Block Graphics



120/200 CPS • 9 x 9 Matrix • Bi-directional, logic-seeking printing • Lower case descenders • Four print styles • Optional Hi-Res Graphics

Okidata 82A ..... List $649
Okidata 83A (w/Tractor) . List $995
Okidata 84 (Parallel) . . . List $1395 **$Call**

Other Quality Printers at Red Baron

NEC Spinwriter RO
Serial Parallel 7700 ..... $3055 **$2500**
Serial 3510 ..... $1895 **$1700**

Interface Equipment
Complete Stock of Options, Cables and Accessories

CCS APPLE SERIAL Interface & Cable . . $150
SIGNALMAN MODEM ..... $Call
COMPLETE STOCK OF EPSON ACCESSORIES ..... $Call
CUSTOM PRINTER CABLES FOR Apple, Atari, IBM, TRS-80 (all models). $Call
HAYES MICROMODEM II $300
PRINTER STANDS: Large ..... $ 99
Small ..... $ 25
PRINTER RIBBONS—Most Types ..... $Call

Here's How To Order:
Phone orders are welcome; same-day shipment on orders placed before 11:00 a.m. Free use of MasterCard and Visa. COD's accepted. Personal checks require 2 weeks clearance. Manufacturer's warranty included on all equipment. Prices subject to revision.

Call For Free Catalog:
(800) 854-8275
CA, AK, HI (714) 779-2779

MasterCard VISA American Express Card

Red Baron
COMPUTER PRODUCTS

Circle 324 on inquiry card.

4501 E. Eisenhower Circle, Anaheim, CA 92807

© Red Baron Computer Products. 1982

www.americanradiohistory.com

BISON PRODUCTS, INC. HAS GONE WILD & WOOLY WITH LOW PRICES!!!

PERIPHERALS

Here are some of the products BISON carries for Apple Computers.

If you don't see what you want here, give us a call.

Microtek 16K RAM Card for Apple II $65.00
Microsoft Premium Pack 479.50
BISON Add-on Disk Drive 260.00
(100% Apple Compatible)
Apple Joystick 49.50
Parallel Printer Card with Cable 71.00
Kensington System Saver 75.00
D.C. Hayes Micromodem II 270.00
Microtek Apple Dumpling GX 118.00
(also available with buffer)
Microtek Magnum 80 ..... 249.00
Microsoft Z80 Softcard with CP/M™ 239.00
Videx Enhancer 119.00
Videx Function Strip 59.00

Practical Peripherals⅛

Microbuffer II, 16K, Parallel 209.00
Microbuffer II, 32K, Parallel 239.00
Microbuffer II, 16K, Serial 209.00
Microbuffer II, 32K, Serial 259.00
Microbuffer 8K, Serial 125.00
Microbuffer 16K, Parallel 125.00

PRINTERS

BISON carries all of the major brands of printers. If you need help choosing the proper printer for your needs, call and talk to one of our support technicians.

NEC PC-8023A Fric. & Trac. w/Graph. .. $485.00
Okidata Microline 82A 80 Col. w/Trac. 439.00
Okidata Microline 83A w/Trac., 132 Col. ... 639.00
Okidata Microline 84P, Parallel 925.00
Okidata Microline 84S, 200 cps/S 999.00
Star Micronics Gemini 10 Printer... **Call For Price**
Star Micronics Gemini 15 Printer.. **Best In Town**
C. Itoh Prowriter I, Parallel 485.00
C. Itoh Prowriter I, Parallel/Serial 575.00
C. Itoh Prowriter II, Parallel 625.00
C. Itoh Prowriter II, Parallel/Serial 685.00
C. Itoh F-10 Starwriter, Parallel 40 cps... 1225.00
C. Itoh F-10 Starwriter, Serial 40 cps 1225.00
C. Itoh F-10 Printmaster, Par. 55 cps 1495.00
C. Itoh F-10 Printmaster, Serial 55 cps... 1495.00
Comrex Daisy Wheel Printer, Parallel 735.00
Comrex Daisy Wheel Printer, Serial 785.00
Comrex Tractor Feed 235.00
Compatible P2350 by Toshiba
Letter Quality, Dot Matrix Printer
with Tractor Feed 1895.00
Diablo 630 Daisy Wheel Printer 1675.00

For more information circle reader service #53

MONITORS

SANYO

12" Green Monitor Model DM2112 ..... 89.00
DMC 6013 13" Color Monitor 375.00
VMC 7013 13" RGB Color Monitor 375.00

AMDEK Monitors

AMDEK Video 300

12" Green Phosphor Non-Glare 145.00

AMDEK Color II

13" Color Mon. RGB IBM/NEC/Apple 645.00
AMDEK Color I 299.00

NEC

12" Green Monitor 159.00
13" Color Monitor 325.00
13" RGB Color Monitor 755.00

Comrex

6500 13" Color Monitor 289.00

TELEVIDEO PRODUCTS

TeleVideo computer terminals and desk-top computer system — high price features at low prices.

TeleVideo TS-802 Computer System

64K, 4 Mhz Z-80A, CP/M™
Dual Floppies, 720K Total
Same CRT and Keyboard as Televideo 950 Terminal
Network Expansion Capabilities
TeleVideo TS-802 ..... 2695.00
TeleVideo TVI-925 Terminal 695.00
TeleVideo TVI-950 Term.— Top-of-Line ... 875.00

MICROPRO SOFTWARE

Call for tremendous savings on MicroPro Software.

S-100 PRODUCTS

Sierra Data Sciences

S-100 Master/Slave Single Board Computers
Master — 4 Mhz, Z80A 690.00
Slave — 4 Mhz, Z80A 625.00
Sierra Data CP/M™ w/Sierra Data BIOS ... 225.00
Sierra Manual 25.00
Sierra Data-Winchester Adaptor 159.00
Sierra Data Turbo DOS 750.00

QT Products

QT 6-Slot, Dual 8" Drives 530.00
QT 8-Slot, Dual 8" Drives 560.00
QT 12-Slot, Dual 8" Drives 620.00

DISK DRIVES

Qume #842 (Replaces Data-Trak 8) 490.00
Tandon Thin 8" Sngl-Side, Dbl-Density ... 345.00
Tandon Thin 8" Dbl-Side, Dbl-Density 475.00
Mitsubushi Dbl-Side, Dbl-Density 399.00

FLOPPY DISKETTE SPECIAL

WABASH

Single-Sided, Single-Density

Box of 10, 8" or 5 ¼"

19.00

SPECIAL OFFER:

Buy a Case of Wabash 5 ¼" Diskettes (100 diskettes to a case) and you pay only

$170.00

(Save $2.00 a box)

TDK

Single-Sided, Single-Density

5 ¼" 20.00
8" 30.00

Double-Sided, Double Density

5 ¼" 25.00
8" 35.00

THE BULL

DISKETTE AND INFORMATION HOLDER

FREE

with $100 purchase.

(Normally retails for $9.95)

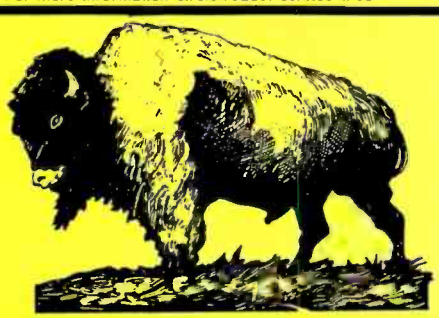

"We accept Cash, Certified Checks, VISA and MasterCard"
All merchandise new in factory cartons with manufacturer's warranty
Corporate and School District P.O.'s accepted subject to credit approval.
Enclose financial statement with order.
California residents add Sales Tax. Shipping charges added to all orders.
"No refunds without prior approval" — Bison credit only on returned merchandise.
QUANTITIES LIMITED ON SOME ITEMS — PRICES SUBJECT TO CHANGE WITHOUT NOTICE
For Further Information Please Circle Reader Service #54
Add 3% for credit card purchases.

Send Mail Orders To: P.O. Box 9078-184 • Van Nuys, California 91409

For Questions or Phone Orders Call:

(213) 994-2533

www.americanradiohistory.com

Data Collection with a Microcomputer

Using a TRS-80 Model I for environmental research saves time and money.

Dr. Mahlon G. Kelly
Department of Environmental Sciences
University of Virginia
Charlottesville, VA 22903

A friend of mine who lives on the edge of a small lake spends every day watching the seasons change, studying the weather, and observing the effects of the creatures in the lake. My friend is particularly fascinated by the chemical, biological, and physical processes going on in the little pond, and like Thoreau beside Walden the fellow resides in a small cabin and has little contact with outsiders. Much to my advantage as a limnologist (a biologist who studies lakes), my friend has almost infinite patience as an observer and commentator and asks only for a continuous supply of electrical power and reliable maintenance for the various sensors, probes, and transducers that monitor the lake. My friend, as you may have guessed by now, is not a person but an old TRS-80 Model I. My colleagues and I have found this inexpensive computer very useful for scientific research.

As a limnologist, I am interested in the conditions that control the rate of growth of the microscopic algae (phytoplankton) that are suspended in lake water. The variables that influence their growth include light, physical mixing of the water (which is related to the temperature variation with depth in the water column), and available nutrients such as nitrate and phosphate.

Photo 1: *The tower supports such meteorological sensors as anemometers and radiometers, and the raft supports such sensors in the lake water as oxygen and temperature probes. Signal-conditioning amplifiers are housed in the white box on the raft, and special equipment can be set up on the raft as well.*

The release of oxygen and the uptake of carbon by photosynthesis reveal the algae's rate of growth. By measuring the change of oxygen and inorganic carbon concentrations in the water, we can estimate the rate of photosynthesis. We can then relate that rate to various environmental factors if we have measurements of light, temperature distribution, wind velocity, air temperature, relative humidity, and precipitation. But manually measuring and logging all of these variables is time consuming and produces only infrequent estimates of photosynthesis. If we could study daily variation by collecting data at least every half hour and collect that data day after day for periods of weeks, months, and seasons, we could produce a very sophisticated analysis of the factors that regulate the ecological quality of a lake.

All of these variables can be measured by probes, sensors, and other transducers whose output can be converted to a voltage. In the past, we recorded the voltages on digital tape with a data logger. Then we fed the tape to a large computer to get actual values for light intensity, temperature, oxygen concentration, and so on, from which it calculated the rate of photosynthesis. The catch is that data loggers are expensive and data processing is tedious.

About the Author

Dr. Kelly, an associate professor of environmental science at the University of Virginia, is involved in research into the character of lakes.

www.americanradiohistory.com

Photo 2: *The buoys leading to shore support the wires that send analog signals to the cabin. The wire for transmitting the signals would have been the most expensive item of the whole installation if we had not bought it as military surplus.*

The TRS-80 is housed in the hut along with other equipment for studying the lake. The hut is heated and air-conditioned because the graduate students operating the equipment argued that the TRS-80 couldn't withstand a wide temperature range. Personally, I think the students are more temperature sensitive than the TRS-80 is.

That's where my friend the TRS-80 comes in. Our department has a 16K-byte Model I that includes an interface with an analog-to-digital (A/D) converter, a multiplexer, and a clock. The interface feeds 48 channels of data into the computer's bus and from there into memory. The A/D converter cost about $450 in parts and the TRS-80 about $650, making a total of $1100 for hardware. The least expensive data logger available would have cost more than $3000, and a specially designed data-logging computer to do the same job as the TRS-80 would have cost more than $10,000. Granted, a more expensive computer would have had additional capabilities, but we didn't need them. And we certainly didn't need the additional expense.

The Data-Acquisition Problem

Figure 1 shows the general data flow we needed for our research. This sort of data flow is common in many science and engineering applications: data is collected from a variety of sensors, recorded, and processed, then the results are displayed and stored.

In the past, monitoring data from the field, which is common in meteorological and water-quality work, usually involved a "dumb" data logger. Figure 2 shows such a data flow. In this instance, the data is converted to raw digital values that are stored at some fixed-time interval on magnetic tape. Tapes from the field recorder are then carried to the lab and processed through a tape-to-tape converter that makes standard 7- or 9-track tapes compatible with a mainframe computer. Then we carry these tapes to the computer, where the values are converted from voltages and transferred to hard disk.

A specially designed data-logging computer to do the same job would have cost more than $10,000.

The data can be examined on a video display using an editor to eliminate obviously bad values. (Bad values are the result of anything from birds perching on anemometers to fishermen anchoring their boats on top of light sensors.) Once corrected, the voltage values are then usually stored on magnetic tape. The voltages are averaged using an appropriate scheme to remove spurious noise and then converted to true values, such as temperature, which are stored as another disk file and saved on tape. Then that file is processed to convert the data into the information needed for the research. In our case, rates of change of oxygen concentration are converted to photosynthetic rates, which are expressed as the rate of release of oxygen by plants in the water. These results are output to tape and printed.

This scheme has several disadvantages. The most obvious drawback is that the operator can't monitor what a dumb logger is doing. And data loggers (even dumb ones) are expensive. Moreover, it takes time and money to transfer tapes from the field to the lab and then to the computer, to pick up output (tapes and printout) from the computer, and so on. And, of course, processing time and disk storage on a mainframe computer are expensive. We needed to make at least five trips to and from a computer center and five program runs on the mainframe for the scheme shown in figure 2.

Enter the Microcomputer

Figure 3 shows the same data flow mediated by two TRS-80 microcomputers. An A/D converter still processes the voltage signals, but now they go directly to the memory in the microcomputer. The signals are then converted to voltages (in floating-point form), the values are averaged by whatever scheme is appropriate, and the results are recorded on an inexpensive cassette tape.

The advantages of this method are clear. The operator can monitor what's happening on a video screen, and the voltages can be converted to preliminary true values. Out-of-range values can also be recognized and eliminated. Several steps usually done by a mainframe computer are now done in real time by the TRS-80 located in the field. After a few days, the tape is removed and taken to

www.americanradiohistory.com

another TRS-80 in the lab, where the data is transferred to disk. The data is then checked and changed with a text editor (we use Scripsit), and the voltages are converted to real data values. Archival data is stored on a 5¼-inch floppy disk, which is much cheaper than a magnetic tape.

At this point there are two options for further data analysis. One is to do simple data analysis using the TRS-80 in the lab. For example, if we only need averages of various parameters every six hours, they can be calculated, stored on disk, and printed out by the TRS-80. Usually, however, the necessary calculations would take too much time and memory, and the mainframe computer would better suit the task. Fortunately, several communications programs are available for the TRS-80 that enable disk files to be sent over the phone to other computers. Our files are sent to the university's computer for further processing, and results are returned to the TRS-80, where they are stored on disk and printed.

By using the communications programs, we eliminated all of the trips to the computer center, cut the mainframe programs down to one, completely eliminated reel-to-reel data conversion, and made the system easier to use. The special hardware and software we needed to accomplish our task are described below.

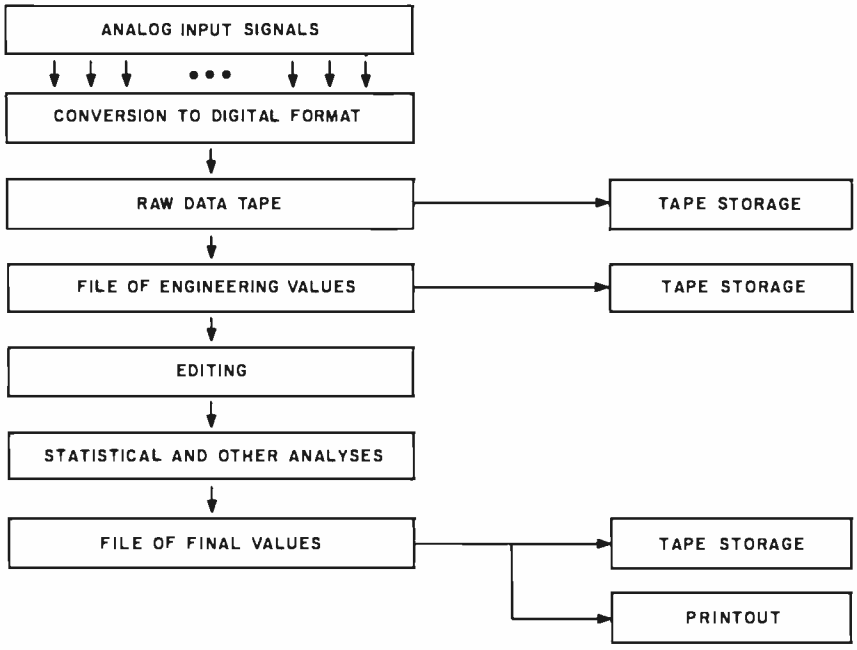

Figure 1: *The data flow used in our research.*

The Hardware

The A/D unit, designed by Jim Demas of the University of Virginia Chemistry Department, uses an interface from HUH Electronics (a company since acquired by California Computer Systems) to convert signals from the 40-line TRS-80 bus to an S-100 bus. The HUH interface has three cards: a multiplexer, an A/D card, and a Wameco RTC-1 clock board. Once the clock board is programmed by the TRS-80, it controls the multiplexer sampling and data transmission to the TRS-80. The multiplexer board, also designed by a faculty member, uses six Analog Devices chips (AD7507s), each of which controls eight input

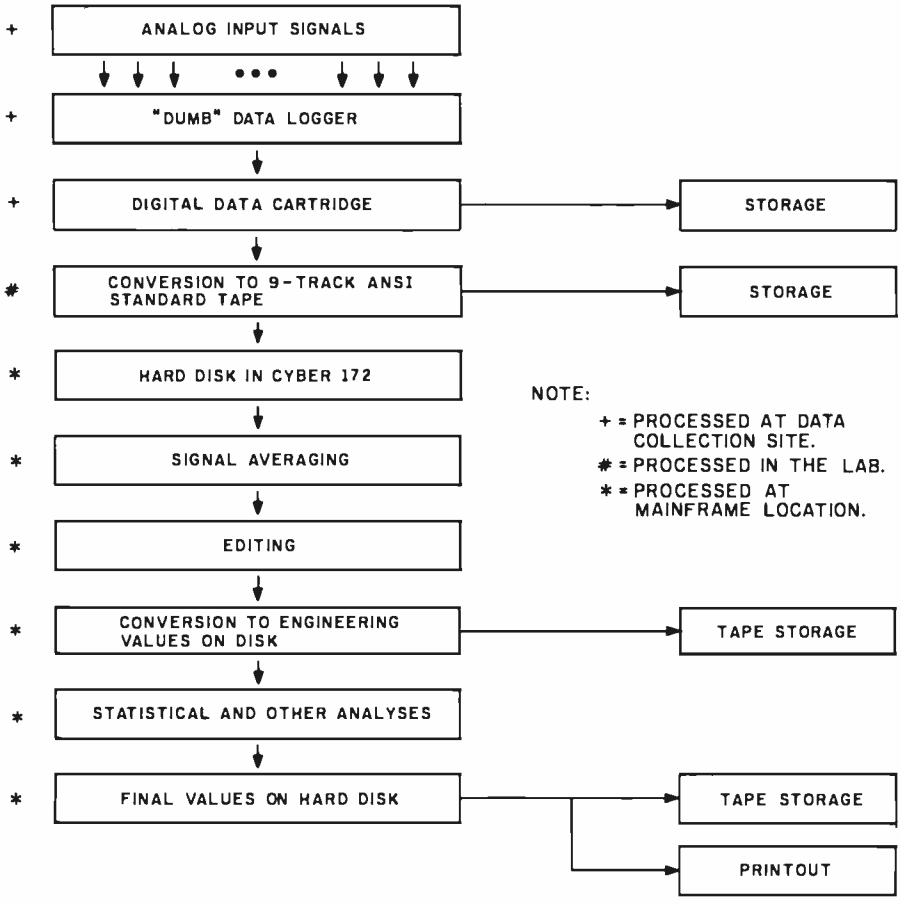

Figure 2: *A typical scientific data flow using a data logger.*

www.americanradiohistory.com

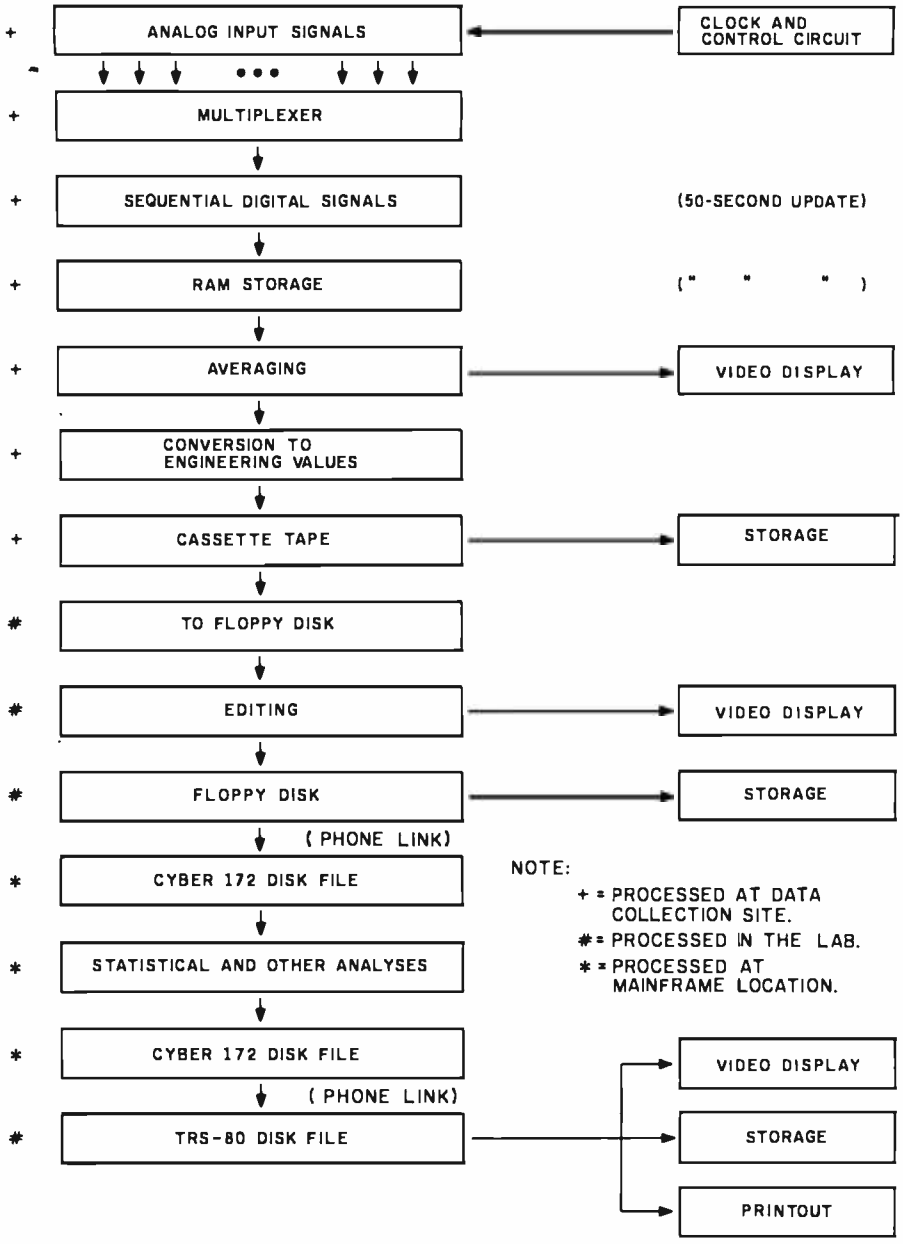

Figure 3: *A typical scientific data flow using two microcomputers.*

signals. The input signals go to an ICL 7109, 12-bit A/D converter chip and from there via the HUH converter as parallel input into the TRS-80 bus. The input ranges from −4 to +4 volts (adjustable with a trimpot) with a resolution and accuracy of more than 1 millivolt. Each of the 48 channels can be examined at an interval of less than 10 ms (milliseconds), although we sample only at 50-second intervals. The sampling interval can be programmed by the TRS-80.

Data-Acquisition Software

Output from each channel is stored in 2 bytes of high memory and refreshed at every sampling interval. The sampling is interrupt-driven. Another 2 bytes are used to store output from the clock, which is recorded as "elapsed time since start." The software is a simple 154-line BASIC program that includes two machine-language programs that are put into a specific high-memory location.

The first program, which uses 36 bytes, initializes and sets up the clock board. The second, which uses 154 bytes, is a driver that receives the inputs and places them in their memory locations. Those locations are then read by the BASIC program and the contents are converted into a millivolt value that is stored as an array variable. We use an x by y matrix for the input variables where x is the number of channels and y is the number of samples taken in the interval between outputs to the tape recorder. Thus, using a 5-minute recording interval and 15 channels, data is stored in a 15 by 6 array (5 channels with 50-second sampling results in 6 inputs per channel).

Normally we average the inputs for 5 minutes before recording, then convert the averages of the input voltages to actual variable values (e.g., oxygen concentration in milligrams per liter or temperature in degrees Celsius). The time is also read from memory and recorded as decimal hours. We could process the inputs further by examining, for example, rates of change of the values. That would require only the addition of subroutines to the BASIC program.

When the data is recorded to tape it is also placed in memory in an x by 48 matrix; here, x is the number of input channels. This matrix may be examined at any time by the operator, so if records are made every half hour, the previous 24 hours of data can be reviewed on the screen. Other information can be stored at the time of recording for future review by the operator.

Using the System

The operator needs to know little more about the computer than how to turn it on and load the program from tape; the program is self-prompting. First it asks for a header message that will be recorded on tape and will describe the particulars of the experiment. Another prompt asks how many channels are being used, what the sampling interval should be, how often the data should be recorded and what the averaging period should be, what the start time is, and what variables are being input on

www.americanradiohistory.com

Lowest Prices on Personal Computers!

Apple II + 48K, Call
Apple III 128K, Call

Apple II Compatible Hardware & Software

MICROSOFT

MicroSoft Softcard Premium System (includes: Softcard, RAM Card, Videx Videoterm 80 Col., Softswitch, Osborne CP/M® user guide) ..... Only $519
16K RAM Card by Microsoft 145
Z-80 Soft Card by Microsoft 275

Videx

Videx VideoTerm 80 Col. Card ... $245

Vista COMPUTER COMPANY, inc

Vision 40 Soft Screen Inter. $139
Vision 80 Video Display Card.... 239
Clock/Calender Card (Apple III)... 159
A-800 DD 8"Disk Controller 299
V-1000 w/2 SS DD 8"Drives, 1199
V-1000 w/2 DD DD 8"Drives, 1499
V-1100 w/2 Thinline DDDD 8"Drives 1699
V-1200 6MB Drive..... 1199
Solo 5¼"SS Drive w/Apple Cont., 329
Solo 5¼"SS Drive w/o Controller, 259

Mountain Computer INCORPORATED

CPS MultiFunction Card $167
The Clock/Calender Card..... 225
A/D+D/A Interface 275
ROM Writer Card..... 145
RAM Plus +(16K)..... 145
RAM Plus +(32K)..... 179
Expansion Chassis 565
Music System..... 295
Super Talker SD-200..... 145
Card Reader 1295

Dynamic Disk Systems

Apple II, Apple III, IBM PC
5 MB Disk System..... $2395
10 MB Disk System..... 2995
15 MB Disk System..... 3495

Computers for people.™ ATARI

ATARI 400, Now $198

ATARI 800, Now w/48K! Now $498

ATARI 410 Program Recorder..... $79
ATARI 810 Disk Drive..... 419
ATARI 850 Interface..... 159
ATARI 830 Modem..... 145
ATARI 825 80 Column Printer..... 559
ATARI Joysticks, (Pair)..... 16
ATARI Pac Man $29.95
ATARI Star Raiders 29.95
ATARI Missile Command 29.95
ATARI Asteroids..... 29.95
ATARI Centipede..... 29.95
ATARI Cavarns of Mars 29.95

SIGNALMAN MK II
300 Baud ATARI Modem
$89.

—WICO—
Command Control
Arcade Quality
Joystick Controllers
$24.95 ea.

ALIEN VOICE BOX
Voice Synthesizer
(For ATARI)
$99

—PERCOM—
ATARI SS DD Single Disk Drive... $629 ATARI SS DD Dual Disk Drive.... 989

HEWLETT PACKARD

Buy any HP item in this box ....
HP-41 Card Reader..... $159
HP-41 Optical Wand 99
HP-41 Printer (82143A)..... 289
HP-IL Printer (82162A)..... 349
HP-IL Digital Cassette Drive..... 349
HP-IL Video Interface Module... 179

and get 1 FREE item in this box!
HP-41 Quad. Memory Module... $59
HP-41 Ext. Func. Mem. Module.. 59
HP-41 Extended Memory Module, 59
HP-41 Time Module..... 59

HP-41C.. $149
HP-41 CV... $219

HP-12C $99
HP-15C 99
HP-16C. 99
HP-11C. 79
HP-10C. 59

HP offers and prices expire 4/30/83

IBM

QUADBOARD by QUADRAM, Inc. Memory Expansion, Clock, Parallel Interface, R232 Int., ON ONE BOARD!
Quadboard w/64K Installed..... $495
Quadboard w/192K Installed..... 719
Quadboard w/256K Installed..... 728

—IBM SOFTWARE—
WordStar by MicroPro..... $299
VisiCalc by Personal Software..... 185

FRANKLIN COMPUTER CORPORATION

Franklin Ace 1000 Color Pkg.
- Ace1000 w/color
- Disk Drive w/controller
- RF Modulator (for color TV), $1499

Franklin Add-on Drive..... Call

—MICROSCI—
Apple II + Compatible Drive
Disk Drive w/Controller..... $479
Disk Drive w.o./Controller..... 379

—RANA/Apple—
Elite I Disc Drive..... $349
Elite I Disc Drive w/Controller.... 449
Elite II Disc Drive..... 549
Elite Controller Card..... 99

CORVUS SYSTEMS
Corvus Winchester 5 Meg.Disk, $2295
Corvus Winchester 10 Meg.Disk, 2895
Corvus Winchester 20 Meg. Disk, 3795
Mirror Back-Up..... 639

Advertised prices do not include shipping. Prices are subject to change and offers may be withdrawn without notice.

TEXAS INSTRUMENTS COMPUTERS

TI-99/4, $198*
*Net cost after $100 Factory Rebate.

Peripheral Expansion Sys. . $195.00
RS-232 Interface Card..... 139.00
Disk Controller Card 195.00
Disk Drive 299.00
Dual Cassette Cable..... 12.50
TI Joy Sticks ..... (Pair) 27.95
TI 10"Color Monitor 319.00
TI Modem 179.00

TEXAS INSTRUMENTS SOFTWARE

PHM-3026 Extended Basic.... $80.00
PHM-3035 Terminal Emulator II . . 39.00
PHM-3055 Editor/Assembler 80.00
PHM-3058 Mini Memory..... 80.00
PHM-3013 Pram. Rec. Keeping . . . 39.00
PHM-3053 TI Invaders..... 32.00
PHM-3057 Munch Man.....32.00
PHM-3054 Car Wars.....32.00
PHM-3112 Parsec..... 32.00

TEXAS INSTRUMENTS CALCULATORS

TI-59 Calculator.....$169.00
TI-58C Calculator..... 79.00
TI PC-100C Printer/Plotter.....149.00
TI-55II Calculator 39.00
TI LCD Programmer..... 55.00

—MONITORS—

AMDEK
Color I..... $339
Color II 699
Color III..... 429
300 Green..... 159
300 Amber 169

BMC 12"Gr.,... $99
Sanyo 9"Gr.,... 159
Sanyo 12"Gr.,.. 209

ZENITH
ZYM-121 Green Phos. only..... $113

—PRINTERS—

EPSON
MX-80 ..... $329
MX-80FT 519
MX-100 715

NEC
8023 Impact Dot Matrix..... $469
3510 33 CPS Serial..... 1599
3530 33 CPS Centronics Par.,.... 1699
Bi-Directional Tractor (3500).... 229
7710 55CPS Serial..... 2349
7730 55 CPS Centronics Par.,.... 2349
Tractor for 7700 Series 229

NEW! OKIDATA 92 ..... Call
CENTRONICS 730-1 Parallel $299

SCM Smith-Corona Daisy Wheel
TP-1.. Now $599.

—MODEMS—

Novation Cat.. $139
Novation D-Cat..... 149
Novation 212 595
Novation Apple Cat II..... 310

Hayes
Micromodem II..... $279
Smartmodem 300..... 219
Smartmodem 1200..... 549
Chronograph..... 189

Write For Free Catalog
Circle 344 on inquiry card.

Personal Computer Systems
P.O. Box 1073
Syracuse, N.Y. 13201

—THORNE—

THORN EMI VIDEO

Soccer (ATARI)..... $37
Jumbo Jet Pilot (ATARI) . 37
Kickback (ATARI)..... 37
Pool (ATARI)..... 24.95
Submarine Commandor (ATARI).... 37
Music Composser (VIC-20)..... 32
Home Financial Managemant... 24.95

commodore

Commodore VIC-20..... $169.00
Commodore Datasette..... 67.00
Commodore Super Expander.... 59.00
Commodore 8K Memory..... 52.00
Commodore VIC Avenger..... 24.95
Commodore VIC Super Alien.... 24.95
Commodore VIC Jupiter Lander . 24.95

—CABLES—
Parallel Printer Cables
ATARI..... $35
Apple II..... 37
IBM..... 40

If you are in need of something you cannot find in our ad, PLEASE CALL.

SHARP

PC-1500 Hand Held Computer.... $208
CE-150 Printer/Cass. Interface.... 195
CE-152 Cassette Tape Recorder..... 75
CE-155 8K RAM Memory Module.... 99
CE-151 4K RAM Memory Module.... 50

MasterCard

315-478-6800

VISA

www.americanradiohistory.com

FLOPPY DISK DRIVES - 8"	PRICE QTY. ONE
QUME	
242 - Half height DSDD 48TPI	450.00
842 - Full size DSDD 48TPI	465.00
TANDON	
TM-848-2 - Half height DSDD 48TPI	465.00
MITSUBISHI	
M-2894-63 - Half height DSDD 48TPI	485.00
FLOPPY DISK DRIVES - 5¼"	
QUME	
142 - Half height DSDD 48TPI	195.00
542 - Full size DSDD 48TPI	260.00
592 - Full size DSDD 96TPI	335.00
TANDON	
TM-100-2 - Full size DSDD 48TPI	255.00
TM-100-4 - Full size DSDD 96TPI	365.00
(For the IBM PC)	
MITSUBISHI	
M-4853 - Half height DSDD 96TPI 1MB	335.00
M-4854 - Half height DSDD 96TPI 1.6MB	395.00
WINCHESTER HARD DISKS	
AMPEX	
Pyxis 7-5¼" 7MB capacity	650.00
Pyxis 13-5¼" 13MB capacity	795.00
Pyxis 27-5¼" 27MB capacity	1225.00
*** 1 year warranty **	
WINCHESTER SUBSYSTEMS	
MEDIA DISTRIBUTING	
MD-10 - 11MB Capacity	2695.00
MD-20 - 22MB Capacity	3595.00
For Z-80, CP/M Systems	
TERMINALS	
ADDS	
VIEWPOINT - Green phosphor	**479.00**
AMPEX	
D-80 - Green phosphor	595.00
D-81 - Green phosphor	625.00
Amber phosphor optional $20.00	
QUME	
QVT-102 - Green phosphor	595.00
QVT-103 - Green phosphor	750.00
QVT-108 - Green phosphor	750.00
PRINTERS	
QUME	
Sprint 11 - 40 CPS Daisy wheel	1395.00
MPI	
Printmate 150 A-1 - Serial. 4K buffer	999.00

QUANTITY ONE!

MEDIA DISTRIBUTING

(408) 438-5454

SUPPLIES AND ACCESSORIES ALSO AVAILABLE

DEALER INQUIRIES INVITED

TERMS: COD, CASH WITH ORDER, MASTERCARD, VISA

FREIGHT CHARGES WILL BE ADDED TO ALL ORDERS

Circle 261 on inquiry card.

particular channels. It also asks for certain calibration constants. Alternately, the operator can choose to record input voltages directly, leaving conversion for later processing. While the program is running, the operator can press certain keys to do such things as display the time, review past data, allow another message to be recorded, or stop the run.

Initially, recording data to tape posed a problem, because numerical data takes a lot of tape space. Our solution was to convert each value to a string, concatenate the strings (with the time added on at the end), and record the single resulting string. This procedure makes it possible for one side of a 90-minute cassette to hold enough data for about 10 days. You may find the procedure useful if you want to store a lot of data on tape.

Processing the Data

Getting the data to the computer and then onto tape is only half the problem. The tape must be read and the data processed further, and in some cases we have to send it to the university's Cyber-173 computer for very detailed and time-consuming analysis. This additional work requires the use of a more sophisticated TRS-80 that has three double-density disk drives, a fast printer (Centronics 102A), 48K bytes of memory, and a modem. This TRS-80 is used as a text editor and teaching device as well as a smart terminal for our large computer.

Two programs do all of the work with the field data. The first one reads the tape and makes an image on disk while (at the option of the operator) it sends a copy to the printer. Once the printout has been examined, any errors can be corrected using Scripsit. As a result, editing and modifying the data is very easy.

The second program reads the disk image of the data and decomposes each data string into actual values. It also does any further conversion that is necessary. For example, if values were stored as voltages, the program will calculate true values. In the data string, a space is used as a value delimiter, and the string must be

www.americanradiohistory.com

TWO WAYS TO BUY ONE PLACE TO BUY WINCHESTER

COMPLETE SUBSYSTEMS

- The MD-10, an 11 MB formatted system for $2695.
- The MD-20, a 22 MB formatted system for $3595.
- The MD-44, a 44 MB formatted system for $4395.

- Interfaces with any Z-80, CP/M* system as well as 8085/8086 and IBM PC*.
- Software includes SOURCE CODE and enhanced utilities.
- Simple installation.
- Networking option; tape back-up option.

OR DRIVES, OFF THE PALLET

- Unformatted disk drives at 7MB ($650, quantity one); 13MB ($795, quantity one); 20MB ($950, quantity one), and 27MB ($1225, quantity one).

AMPEX

- 90 millisecond average access time.
- Maintenance-free operation.
- An AMPEX one-year warranty.

MEDIA DISTRIBUTING

DEALER INQUIRIES INVITED

*Registered trademarks of Digital Research, Inc. and IBM Corporation

MEDIA DISTRIBUTING 4444 Scotts Valley Drive Scotts Valley, CA 95066 408/438-5454

Circle 262 on inquiry card.

www.americanradiohistory.com

examined character by character. This process would be insufferably slow in interpreted BASIC, but using Microsoft's compiler speeds up the process. For example, it takes about 15 seconds to decompose and manipulate a single string record in interpreted BASIC, while 30 may be done in a minute using the compiled program.

The output is sent to a second disk file, to the printer, and to the screen. The disk file may also be modified by Scripsit if necessary. The entire process for 5 days of 15 channels of data takes from one to two hours, depending on how much editing you must do. Because the TRS-80 is not always reliable when it comes to writing and reading from tape, some records are garbage. The second program detects garbage and dubs in interpolated values (we can get away with this because we are collecting more data than we really need). By using one of the commercially available units that improve tape read/write reliability, the garbage could be largely eliminated.

The data must still be sent to the university's Cyber-173 computer. This is easily accomplished by using any of the communications programs designed for uploading and downloading programs from computer bulletin boards, The Source, and so on. We use Lance Micklus's ST80-III. We load the data file into a memory buffer, dial the Cyber's user number, log on, and send the buffer to the CDC at 300 bits per second. The data is then stored on a disk at the Cyber, where we can do whatever analyses we like.

Similar Applications

We also use a TRS-80 for logging data in an analytical chemistry lab. It's connected to a spectrophotometer, an automated titrator, and an autoanalyzer to calculate chemical concentrations and other information. In fact, this TRS-80 has replaced many of the functions of a $40,000 LSI-11. We had been sending the chemical data over wires to a central LSI that serviced several labs, but using the TRS-80 for the same purpose was actually cheaper than buying and installing the cables to transmit the data. And it was more convenient.

Microcomputer As Data Logger

We chose the TRS-80 for its low cost and the plethora of software available for it. Having a low-cost field unit is very important to us. Last summer our installation was hit by lightning; traces were actually vaporized on the boards and the TRS-80 was ruined. Even after we replaced it, our total expenditure was much less than the price of one data logger.

The software advantages are even more important. Using Scripsit to edit data files gives us flexibility that is not possible with the university's large computer, and ST80-III gives us data-transmission flexibility not available with most systems. I suppose we could have written software to do the same thing for another system, but that would have taken time away from the research itself.

Saving Time and Money

I think my TRS-80 is a good example of how useful small microcomputers can be to a scientist for operations previously done by much more expensive equipment. The TRS-80 in the chemistry lab pretty well eliminated a much larger minicomputer, and our TRS-80 completely eliminated a data-logging system that had been in use for six years. As a result, our charges from the university's computer center have decreased by about 30 percent during the past year, and I would guess that the hours spent on data processing have been cut in half. Field work that required two technicians is now done by one, and more quickly as well.

Data collection, once a nuisance, is now much more fun. Perhaps most important is that we can now spot and correct problems in the field without bringing data tapes back to the lab to be processed. ■

Need to Measure Your Corporate Communications?

Want to define your company's image? Measure competitive strengths? Determine the acceptance of your company publications? Gauge reactions to your annual report? Determine the effectiveness of your corporate advertising? Monitor the impact of important trends and developments on your company's business?

Call McGraw-Hill Research

Backed by 30 years of research experience covering scores of markets and fields, McGraw-Hill Research professionals design custom projects that can make a big difference in the success of your corporate communications efforts. The Corporate Communications Research Center will meet your research needs promptly, at a reasonable price.

Put McGraw-Hill Research to work for you.

For a quote or proposal, call Joan Bullen, Director-Corporate Communications Research Center at (212) 997-3517 or Eleanor Nicoletti, Project Director, at (212) 997-3095. Or, write Corporate Communications Research Center, 1221 Avenue of the Americas, New York, NY 10020

If it's a communications problem, we probably pioneered the solution.

www.americanradiohistory.com

A 68000 or Z-8000 System With UNIX-Type Operating System Software and a 5 Meg. Winchester Disk Drive For $10,000

Since we ran our January Byte advertisement, we've been deluged with calls requesting information about our Motorola 68000 and Z-8000 super microcomputer systems. As many know, LMC is a builder of extremely reliable and expandable microcomputer systems implemented on the multibus (IEEE 796) thereby allowing use of virtually all peripheral devices. What many of our prospective customers don't know (until they write or call for our brochure and price list) is that our prices for 16-bit machines may well be the lowest in the industry. This month we present a description of one of our smaller systems—the LMC System 2. As you will see, System 2 is a terrific value—no one else gives you so much power, memory, software and expandability for $10,000. The value and performance built into System 2 are found in all LMC products.

LMC System 2:

- Your choice of Motorola 68000 or Zilog Z-8000 CPU with Monitor Program in ROM.
- 128 K of RAM.
- One 8-inch Double Density/Double Sided Floppy Disk Drive.
- One 5 Meg. Winchester Disk Drive (removable cartridge type).
- Two Serial and Four Parallel I/O Ports.
- Disk Drive Controllers.
- UNIX-type Operating System Software
  - With the MC 68000 System, IDRIS (UNIX compatible by Whitesmiths).
  - With the Z-8000 System, ZENIX (UNIX compatible by MicroSoft).
- The C Programming Language.
- Case, Power Supply and Chassis with 12 Additional Slots for more RAM, Controllers, etc.
- Complete, ready to run.

Typical of LMC's commitment to innovation and value is our development of mega-micro systems—true 32-bit microcomputers that implement hardware virtual memory. These machines represent the next generation of microcomputers and they provide super-mini or mainframe performance at microcomputer prices. For example, we've been developing a system built around the new National Semiconductor 16032 which is a 32-bit virtual memory processor that runs existing CP/M and MP/M software with a remarkable improvement in performance. Because this advertisement goes to press early in January and because it is a corporate policy of LMC never to claim that a new product has "arrived" or is "available" until we've completely debugged it, fully tested it, and have it available for immediate delivery, we cannot announce our 16032 Systems. However, by the time you read this ad, we may well be delivering 16032 systems and would be happy to discuss the next generation of mega-microcomputers with you.

The Logical MicroComputer Company

140 South Dearborn, Chicago, Illinois 60603 USA, 312.580.0250, Telex: Lexecomp

LMC

The Logical Alternative

All of LMC's equipment is protected by a limited one-year warranty. Service contracts are available as is factory service at an hourly rate. In fact, if a customer purchases our special-service feature, we will ship a replacement system anywhere in the free world within 24 hours of a hardware failure (at our expense). This means that for most customers we can guarantee delivery of a replacement system within one day. Call or write us for detailed information.

www.americanradiohistory.com

"I built this 16-bit computer and saved money. Learned a lot, too."

Save now by building the Heathkit H-100 yourself. Save later because your computer investment won't become obsolete for many years to come.

Save by building it yourself. You can save hundreds of dollars over assembled prices when you choose the new H-100 16-Bit/8-Bit Computer Kit – money you can use to buy the peripherals and software of your choice.

H-100 SERIES COMPUTER SPECIFICATIONS:

USER MEMORY:
128K-768K bytes*

MICROPROCESSORS:
16-bit: 8088
8-bit: 8085

DISK STORAGE:
Built-in standard 5.25" disk drive, 320K bytes/disk

KEYBOARD:
Typewriter-style, 108 keys, 13 function keys, 18-key numeric pad

GRAPHICS:
Always in graphics mode. 640h/225v resolution; up to eight colors are available**

COMMUNICATIONS:
Two RS-232C Serial Interface Ports and one parallel port

DIAGNOSTICS:
Memory self-test on power-up

AVAILABLE SOFTWARE:
Z-DOS (MS-DOS)
CP/M-85
Z-BASIC Language
Microsoft BASIC
Multiplan
SuperCalc
WordStar
MailMerge
Data Base Manager
Most standard 8-bit CP/M Software

*128K bytes standard. **=Optional.

The H-100 is easy to build – the step-by-step Heathkit manual shows you how. And every step of the way, you have our pledge – "We won't let you fail." Help is as close as your phone, or the nearest Heathkit Electronic Center.

And what better way to learn state-of-the-art computing techniques than to build the world's only 16-bit/8-bit computer kit? To run today's higher-speed, higher-performance 16-bit software, you need an H-100. It makes a significant difference by processing more information at faster speeds.

Dual microprocessors for power and compatibility. The H-100 handles both high-performance 16-bit software and most current Heath/Zenith 8-bit software.

Want room to grow? The H-100's standard 128K byte Random Access Memory complement can be expanded to 768K bytes – compared to a 64K standard for many desktop computers.

And the industry-standard S-100 card slots support memory expansion and additional peripheral devices, increasing future upgradability of the H-100.

High-capacity disk storage, too. The H-100's 5.25" floppy disk drive can store 320K bytes on a single disk. The computer also supports an optional second 5.25" and external 8" floppy disk drives. And an optional multi-megabyte internal Winchester disk drive will be available in the near future.

The H-100 gives me the most for my computer dollar!

www.americanradiohistory.com

Critical circuits are pre-assembled, making the H-100 easier and faster to build!

Want beautiful high-resolution graphics? You can create extensive charts, drawings, graphs and symbols to meet your needs – using the H-100's bit-mapped graphics and its 640 x 225 pixel video display.

The H-100 gives you total communications flexibility. Three interface ports let you plug in dot-matrix and letter-quality printers, as well as other peripherals.

Compare the H-100's exceptional capabilities with other desktop computers:

COMPUTER:	Heathkit H-100	IBM Personal Computer	Apple III
MICROPROCESSORS:			
16-bit:	8088	8088	–
8-bit:	8085	–	6502
RANDOM ACCESS MEMORY:			
Minimum:	128KB	16KB	128KB
Maximum:	768KB	576KB	256KB
FLOPPY DISK STORAGE:			
Per Diskette:	320KB	320KB	140KB
Maximum Internal:	640KB***	640KB	140KB
8" Floppy Support:	Standard	—	—
EXPANSION SLOTS:	Five S-100 (four available)	Five (three available)	Eight
I/O PORTS:			
Parallel:	1	Optional	–
Serial:	2	Optional	1
VIDEO DISPLAY:			
Line Columns	25 x 80	25 x 80	24 x 80
Pixels Colors	640 x 225 (8 colors)	640 x 200 (2 colors) 320 x 200 (4 colors)	560 x 192 (16 colors)
OPERATING SYSTEMS:	CP M-85, Z-DOS (MS-DOS)	CP M-86 PC-DOS (MS-DOS) UCSD P-System	Apple SOS

Information current as of 8/31/82. ***External disk storage available soon.

Learn by building. When you build and operate the H-100, you learn more about this sophisticated computer system and its unique 16-bit/8-bit software capabilities.

Learn from outstanding documentation. One of the most important parts of any computer system is documentation – and Heathkit documentation is among the industry's best. Our instruction and operating manuals are fully detailed, in the world-famous Heathkit tradition.

Learn by doing. Many of our software programs come with a complete set-up and operating manual. More complete than most other software documentation, each manual not only tells you what the program will do – it shows you the easiest way to accomplish each task.

We back you all the way. With Heathkit computer products, technical assistance and expertise is as close as your telephone – or the nearest Heathkit Electronic Center.* Complete technical assistance and service is available at over 60 locations nationwide.

Buy from a leader. When you choose a Heathkit computer, you get the backing and reliability of the world's leader in quality electronic kits for over 50 years! You can count on us for quality, service, reliability and value – at kit prices that give you more computer for your dollar!

See the H-100 in action. Visit your nearby Heathkit Electronic Center, which has the world's first 16-bit/8-bit computer kit, peripherals and software programs on display. See your telephone white pages for the nearest store location. Or mail the coupon today for a FREE, full-color Heathkit computer catalog.

Always in graphics mode, you can control each of the H-100's 144,000 screen dots! (Color graphics optional)

Circle 119 on Inquiry card.

CLIP COUPON AND MAIL TODAY TO:
Heath Company, Dept. 334-994
Benton Harbor, MI 49022

Please send my FREE Computer Catalog, with details on the new 16-bit/8-bit H-100 Computer Kit, today!

Name _____

Address _____

City _____ State _____

CP-218 Zip _____

*Heathkit Electronic Centers are units of Veritechnology Electronics Corporation. Heath Company and Veritechnology Electronics Corporation are subsidiaries of Zenith Radio Corporation. Prices, product availability and specifications are subject to change without notice.

Heathkit®
Heath Company

www.americanradiohistory.com

COMPUTER SYSTEMS

"Quality Throughout"

800-238-3100

Q.T. Products Division
COMPATIBLE COMPUTER CORP.
3330 South Third St. West
Salt Lake City, UT 84115
☎ (801) 974-0999

Q.T. Systems Division
GOLDEN WEST COMPUTERS
60 North 300 West
Provo, UT 84601
☎ (801) 373-1467

NEW IMPROVED 1983 MODELS

The entire Q.T. product line has been redesigned and improved using computer controlled manufacturing techniques to insure the highest quality. Many new features have been added to every item. The Q.T. 1983 models are among the best S-100 products available on the market today. They are fully compatible with the latest 16/32 bit cpu's.

Call (800) 238-3100 today for the location of your nearest dealer and/or to obtain the 1983 Q.T. catalog. Substantial dealer/OEM discount offered.

Stocking dealers with retail showrooms and mail order facilities include:

Priority One, Chatsworth, CA ☎ **800-423-5922**
Bison Products, Los Angeles, CA ☎ **213-994-2533**
Compatible Computer, New York City ☎ **212-221-7900**

NOTICE: CP/M is a trademark of Digital Research. Turbodos of Software 2000 and INFOWARE of Compatible Computer Corporation. The Q.T. products and systems above are produced and sold under license by Compatible Computer Corporation and Golden West Computers, Inc. The Q.T. trademark and product designs remain the property of the licensor, Q.T. Computer Systems, Inc. of Hawthorne, Calif.

TERMS: Cash prepayment & 2% discount. COD or net 30 days with prior credit approval. Initial dealer/OEM orders must be COD or prepaid (MC/Visa credit card OK). Purchase orders accepted from D&B rated firms. Shipping and handling charges estimated at $0.50/lb UPS ground and $1.00/lb UPS Blue Label or airfreight. Minimum $3.00. Utah residents add sales tax. Export orders welcomed—telex 426382 ITR UI.

Q.T. DISCOUNT MICRO-SYSTEMS PACKAGES

Q.T. MAXI-SYSTEM PACKAGE—Model 800P

$6,395.00

List $7,995.00—Save $1,600.00

—QT 8" Mainframe with 8 slot Motherboard
—Choice of printer: C. Itoh F-10 daisy wheel or Oki data M84P high speed dot matrix (200 cps.)
—Televideo 925 Full Featured CRT

The Q.T. Maxi-System is an industry standard S-100 expandable microcomputer which is ideal for general business computing, word processing and data base management applications. CP/M operating system is standard. MP/M or Turbodos optional. Unique Infoware® utilities simplify operation and user training.

- Electronics on Two Cards
- 4MZ Z80A CPU
- Filtered Fan
- 64K RAM Standard
- Parallel Printer Port
- Two A.C. Outlets
- Universal Disk Controller
- 10-40 MB Hard Disk Option
- Key Lock Switch
- 2 Megabytes on line
- Expandable to 256K RAM
- Two Serial Ports

Package Price Includes Cables, Documentation & Utility Programs. Model 800 alone $4,995

Q.T. MINI-SYSTEM PACKAGE—Model 500P

$3,995.00

List $4,995.00—Save $1,000.00

—Q.T. 5¼" MINI-FRAME w/6 slot MB
—Televideo 910 Green CRT
—Dot Matrix printer (M82A)

- CP/M standard. Turbodos optional.
- Reliable Single Card Electronics
- Z80 CPU/Universal DMA controller
- Dual Double Sided/Density Drives
- Memory: 64K RAM & 320K Disk Drive
- Cables, manuals, Infoware® Utilities

Model 500 alone $3,495.00

Q.T. INDUSTRY STANDARD S-100 MAINFRAMES

Q.T. MICRO-FRAME™

Q.T. MINI-FRAME™

Q.T. MAXI-FRAME™

Q.T. MICRO-FRAME®—Series 600

Desk Top-Plain Front Panel

- 6 to 22 slot Motherboard
- Full I/O Cutout Array
- Fused EMI/RFI Filter
- Heavy Duty Power Supply (+8V@16A ±16V@3A)

QTC-MF+1	No MB	$499
QTC-MF+6	6 slot MB	$599
QTC-MF+8	8 slot MB	$649
QTC-MF+12	12 slot MB	$699
QTC-MF+18	18 slot MB	$799
QTC-MF+22	22 slot MB	$899

Q.T. PRO-FRAME®—Series 700

Rack Mount—Constant Voltage

QTC-RM+12	12 slot MB	$799
QTC-RM+18	18 slot MB	$899
QTC-RM+22	22 slot MB	$999

Q.T. MINI-FRAME®—Series 500

Desk Top—Dual Mini Drives

- Holds two 5¼" Drives
- Full Cutout Array
- 6, 8, or 12 slot MB.
- Fused EMI/RFI Filter
- Hard Disk Power Supply (+8V@16A, ±16V@3A, ±12V@5A, +5V@5A)

QTC-MF+MD	(No MB)	$699
QTC-MF+MD6	6 slot MB	$799
QTC-MF+MD8	8 slot MB	$849
QTC-MF+MD12	12 slot MB	$899

Q.T. MAXI-FRAME®—Series 800

Desk Top for Dual 8" Drives

- 6, 8, 12 slot Motherboard
- Universal Drive mounts
- Key lock Power Switch
- Heavy Duty Power supply (+8V@16A, ±16V@3A, +5V@5A, −5V@1A, +24V@5A)

QTC-MF+DD1	No MB	$799
QTC-MF+DD6	w/6 s. MB	$899
QTC-MF+DD8	w/8 s. MB	$949
QTC-MF+DD12	w/12 s. MB	$999

Standard features & Options: All QT mainframes are built on a strong steel chassis with sturdy heavy gauge aluminum covers. Heavy duty power supplies have individually fused outputs and are shielded by an EMI/RFI filter & line surge protector. Standard I/O cutouts include provision for 16 DB 25's, 1 DC 37, 2 DA 15's, centronics parallel, 134 pin and 250 pin IDC ribbon cable connectors. Filtered positive pressure cooling fan. Twin AC outlets provide convenient connection for and control over printer and terminal. Standard colors are charcoal/light grey to match Televideo terminals. Optional colors include brown/tan and federal spec. ivory at extra charge. Constant voltage power available on most models—add $100.00. EIA rack mount rails available on some units—add $95.00. Complete OEM customization available on orders of 10 or more units. Contact factory for details and pricing.

Q.T. DISK DRIVE CABINETS AND SUBSYSTEMS



Front—Tandon Panel

Front—no panel



Rear view

Q.T.'s All in One™

Universal Disk Drive Cabinet

• Expandable • Accepts all 8" drives

QT's unique new disk drive cabinet has been designed to accept virtually any 8" drive on the market today from Tandon Thinlines to 40 megabyte Quantums. Features include interchangeable face plates (Qume, Shugart, Tandon, etc.) and "electronics in a drawer" construction to simplify installation and maintenance. Heavy duty power supply will carry any combination of up to four Thinline, two standard, or one hard disk drive with floppy backup. +5V@5A, −5V@1A, +24V@5A.

QTC-DDC8 8V-XX w/one faceplate	$399.00
Replacement Faceplates (Specify type & number of drives)	$25.00
Tandon 4-drive power cable	$15.00
Data Cables available	$20-50.00



SINGLE 8" VERTICAL CABINET

Size: 11"H 11"W 18"D

Perfect add-on disk drive for any system. Accepts most brands.

QTC-DDC8V $299

DUAL 8" HORIZONTAL DRIVE CABINET

Dimensions: 5"H 17"W 20"D

Designed to provide basic disk storage capacity for S-100 and other computers. Low profile permits table top stacking.

QTC-DDC+88H $349

Q.T. "ALL IN ONE" EXPANDABLE DISK DRIVE SUBSYSTEM SPECIALS

QTC-DDS+0 with two single sided Siemens Drive (0.5MB)	$695
QTC-DDS+1 with one double sided Mitsubishi Drive (1MB)	$895
QTC-DDS+2 with two DSDD Mitsubishi Drives (2MB)	$1,495

Circle 365 on Inquiry card.

www.americanradiohistory.com

Add Dimensions to Your BASIC

Timothy G. Corrigan
4232 North Mulligan
Chicago, IL 60634

If you have an application that requires more dimensions than your BASIC supports, or if you are an assembly-language wizard with a multidimension application, then have no fear. There is an easy solution to your problem.

Listing 1 contains a program that uses an array with one dimension as if it had two dimensions. Line 130 defines the function used to calculate the single index value using two variables. Lines 140 and 150 define the maximum values for the two dimensions. The rest of the program builds a simple multiplication table. To alter the size of this two-dimensional array, just change the XM and YM values. You will also have to change the number of elements in the A array.

Listing 2 contains a program that uses an array with one dimension as if it had three dimensions. The programs in listings 1 and 2 are very similar. The difference in listing 2 occurs in line 130, which determines the function that calculates the index value. To change the function from two dimensions to three, a set of parentheses is placed around the function used for two dimensions. This value is then multiplied by the maximum value for the third dimension, and the third-dimension variable is added. The procedure can be repeated to give you an unlimited number of dimensions in your arrays. For example, the function for an array with four dimensions is

$$I = ((X*YM + Y)*ZM + Z)*TM + T$$

This addressing scheme will also allow you to create and randomly process disk arrays. Instead of using the calculated index as an array index, it may be used as the record number when reading or writing to a disk file.

Listing 3 contains an assembly-language routine that will calculate the index value for any multidimensional array. The routine is written in IBM 360/370 assembler code. (The IBM 370 has 16 general-purpose registers. The registers all appear in the listing as "Rn".) Register 2 points to a series of 2-byte data items that define the array. Register 3 points to another series of 2-byte data areas that specify the values of the variables (i.e., the X, Y, and Z values from the BASIC programs) that will be used to calculate the index value. Register 4 is used as an index register. The rest of the program is explained in the BASIC-like comments. ■

JAY WEINBERG: LIVING PROOF YOUR CONTRIBUTIONS COUNT.

These days, Jay Weinberg's most difficult battles take place on the tennis court. Five years ago, he had a different kind of fight on his hands: against one of the toughest forms of cancer.

Cancer research and treatment have made Jay's kind of recovery possible for almost 2 million people. Which means that your donations have helped buy Jay Weinberg a very beautiful gift: his life.

CANCER CAN BE BEAT.

American Cancer Society

www.americanradiohistory.com

Listing 1: *This simple BASIC program builds a multiplication table using an array with only one dimension. A PRINT statement can be added at line 195 to print the values of I, X, and Y.*

```
100 REM
110 REM ACCESS SINGLE DIMENSION ARRAY WITH TWO INDICES
120 REM
130 DEF I=X*YM+Y      :REM DEFINE INDEX CALCULATION FUNCTION
140 XM=9              :REM X DIM HAS 10 ELEMENTS 0-9
150 YM=4              :REM Y DIM HAS  5 ELEMENTS 0-5
160 DIM A(49)         :REM ARRAY HAS 10*5 ELEMENTS 0-49
170 FOR X=0 TO XM     :REM INIT X LOOP
180 FOR Y=0 TO YM     :REM INIT Y LOOP
190 A(I)=X*Y          :REM BUILD A MULTIPLICATION TABLE
200 NEXT Y            :REM LOOP FOR ALL Y VALUES
210 NEXT X            :REM LOOP FOR ALL X VALUES
220 END               :REM END OF PROGRAM
```

Listing 2: *A BASIC program that builds a three-dimensional table for the function X * Y + Z using an array with only one dimension. A PRINT statement can be added at line 215 to print the values of I, X, Y, and Z.*

```
100 REM
110 REM ACCESS SINGLE DIMENSION ARRAY WITH THREE INDICES
120 REM
130 DEF I=(X*YM+Y)*ZM+Z     :REM DEFINE INDEX CALCULATION FUNCTION
140 XM=7                    :REM X DIM HAS  8 ELEMENTS 0-7
150 YM=9                    :REM Y DIM HAS 10 ELEMENTS 0-9
160 ZM=9                    :REM Z DIM HAS 10 ELEMENTS 0-9
170 DIM A(799)              :REM ARRAY HAS 8*10*10 ELEMENTS 0-799
180 FOR X=0 TO XM           :REM INIT X LOOP
190 FOR Y=0 TO YM           :REM INIT Y LOOP
200 FOR Z=0 TO ZM           :REM INIT Z LOOP
210 A(I)=X*Y+Z              :REM BUILD A TABLE FOR X*Y+Z FUNCTION
220 NEXT Z                  :REM LOOP FOR ALL Z VALUES
230 NEXT Y                  :REM LOOP FOR ALL Y VALUES
240 NEXT X                  :REM LOOP FOR ALL X VALUES
250 END                     :REM END OF PROGRAM
```


Need More Serial Ports ?

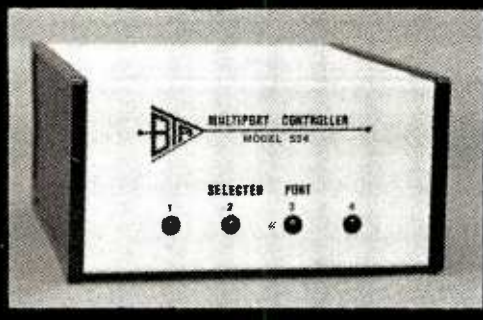

- Add a BTA smart multiport controller to your C.P.U.
- The **MODEL 524** expands a single RS232 port to four individual ports with port selection and baud rate controlled by user software.
- Buffered inputs permit simultaneous operation increasing data exchange rate.
- 62K spooler model also available.

Price $249.00

Bay Technical Associates
P. O. Box 387, Bay St. Louis, MS. 39520
601 - 467-8231

Circle 47 on inquiry card.

www.americanradiohistory.com

Listing 3: *This IBM System 360/370 assembly-language, general-purpose program performs the same array index calculation used in the two BASIC programs, and it can be used with any size array. The routine requires one input area that describes the size of the array (the array control information) and another input area that indicates which element you wish to address (the requesting values). The output of this routine is the index or byte displacement of the element you have asked for. This value should be added to the beginning address of the array.*

```
                        *          INPUT...
                        *
                        *          R2 = POINTER TO FOLLOWING ARRAY CONTROL INFO
                        *          2 BYTE ELEMENT LENGTH
                        *          2 BYTE # ARRAY DIMENSIONS
                        *          2 BYTE MAX VALUE FOR DIMENSION 1
                        *          2 BYTE MAX VALUE FOR DIMENSION 2
                        *          *                                *
                        *          *                                *
                        *          2 BYTE MAX VALUE FOR DIMENSION N
                        *
                        *          R3 = POINTER TO FOLLOWING PARM LIST
                        *          2 BYTE REQUESTING VALUE FOR DIMENSION 1
                        *          2 BYTE REQUESTING VALUE FOR DIMENSION 2
                        *          *                                      *
                        *          *                                      *
                        *          2 BYTE REQUESTING VALUE FOR DIMENSION N
                        *
                        *
                        *          OUTPUT...
                        *
                        *          R1 = INDEX VALUE INTO ARRAY
                        *
                        *
0000 4862 0002                     LH     R6,2(R2)        R6 = # DIMENSIONS
0004 8960 0001                     SLL    R6,1            R6 = R6 * 2
0008 1B44                          SR     R4,R4           R4 = 0
000A 1B55                          SR     R5,R5           R5 = 0
000C 4814 3000          ARRLOOP    LH     R1,0(R4,R3)     R1 = VALUE FROM PARM LIST
0010 1A15                          AR     R1,R5           R1 = R1 + R5
0012 4140 4002                     LA     R4,2(,R4)       R4 = R4 + 2
0016 1964                          CR     R6,R4           IF R6 = R4 THEN
0018 4780 F026                     BE     ARRDONE         GOTO ARRDONE, ELSE
001C 4C14 2004                     MH     R1,4(R4,R2)     R1 = R1 * MAX FOR DIM N+1
0020 1851                          LR     R5,R1           R5 = R1
0022 47F0 F00C                     B      ARRLOOP         GOTO ARRLOOP
0026 4C12 0000          ARRDONE    MH     R1,0(R2)        R1 = R1 * ELEMENT LENGTH
002A 07FE                          BR     R14             RETURN
```




Computer Solutions
We sell SemiDisk
for S-100 IBM Personal Computer
TRS-80 Model 2

Computing has entered a new era: The SemiDisk era! No longer are you tied down by the speed of floppies or winchesters. Your computer can operate many times faster with a SemiDisk. And with our self installing software it couldn't be easier. Just plug in and hold on! No kidding! Special pricing: $1595 for 512K Byte and $2495 for 1 meg Byte.

Specifications:
TYPE: Semiconductor Disk Emulator
CAPACITY: 512k or 1Mb
POWER REQUIREMENTS: 0.6A (512k) 0.9A (1Mb)
BATTERY BACKUP: 10-12V Unreg. (optional)

Dealers Wanted

For information contact:
Computer Solutions
Robert Pinkham
P.O. Box 931
Hillsboro, OR 97123
(503) 640-5665

Circle 108 on inquiry card.

www.americanradiohistory.com

Build This Memory, Part 1

How to construct a low-cost memory board with dynamic devices.

Cameron Spitzer
3369 Vanderbilt Way
Santa Clara, CA 95051

Many personal computer experimenters want a lot of inexpensive memory to expand their computers. I'll explain how I built a 64K-byte memory card for my S-100 machine for less than $200, using the 4116 memory device. I'll also explain how the board works. This inexpensive circuit has been reliable for me and, if you build it carefully, will satisfy your memory needs for years.

I limited the parts list to items I could buy from mail-order "hobby" dealers. The circuit was designed for easy expansion later on, as your needs grow. It will take few changes to switch to 4164s, if you wish. Plenty of room is left on the card (see photo 1a and b) for adding simple accessories like write protection, overlaid pages, interrupt on a write or address violation, or whatever you like.

The integrated circuits (ICs) most often used in S-100 memory systems are 2114L, 4K by 1-bit MOS (metal-oxide semiconductor) static devices, but the best-selling ICs are 4116 16K by 1-bit dynamic devices. Both are made by the same process, using n-channel metal-oxide silicon transistors, but each takes a different circuit-design strategy (table 1 contrasts the two types of circuits). The static version costs about five times as much per bit of storage as the dynamic and will occupy twice the space in your system. On the other hand, statics require far simpler support circuitry.

The circuit was designed for easy expansion later, as your needs grow.

I chose the S-100 bus for my machine because it's the most widely supported modular computer. Every computer accessory you can name is probably available for the S-100. The bus first appeared in early 1975, and the IEEE (Institute of Electrical and Electronics Engineers) has established it as a standard. For many years there were no standard signal definitions, pin numbers, or timing relationships, so there are several mutually incompatible variations of the bus. I'll describe two: the IEEE-696 specification and the simplified Z80 version. For years S-100 owners have had to examine each product for compatibility with their own bus versions, and I've approached the problem by showing jumper-selectable interface circuits for both versions.

S-100 Signals

First I'll describe the Z80 version of the S-100 bus, by giving a description of the signal on each pin used by my memory card. The status, or cycle-request, bus consists of four lines that request bus cycles: sMEMR, MWRT, sIN, and sOUT. Figure 1 shows how the Z80 processor board in my system generates these. The other lines are mostly power and buffered Z80 signals.

A +8-volt (V) power supply is used to power the TTL (transistor-transistor logic) devices. A +16-V power supply powers the dynamic memory devices. The Z80 also requires a −16-V power supply. (The supplies are regulated on the card, so

www.americanradiohistory.com

(1a)

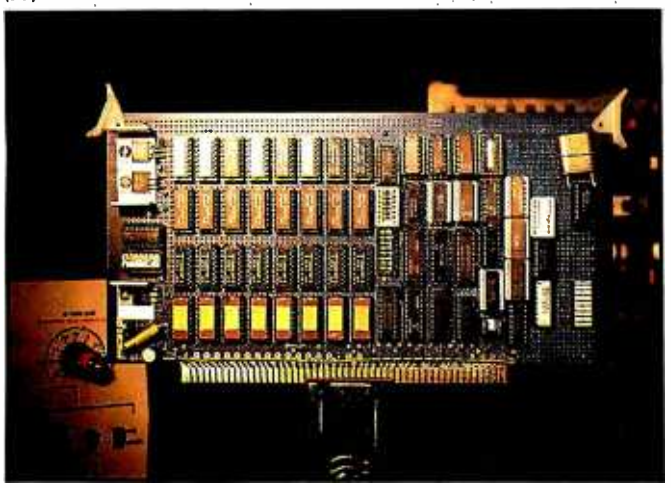

(1b)

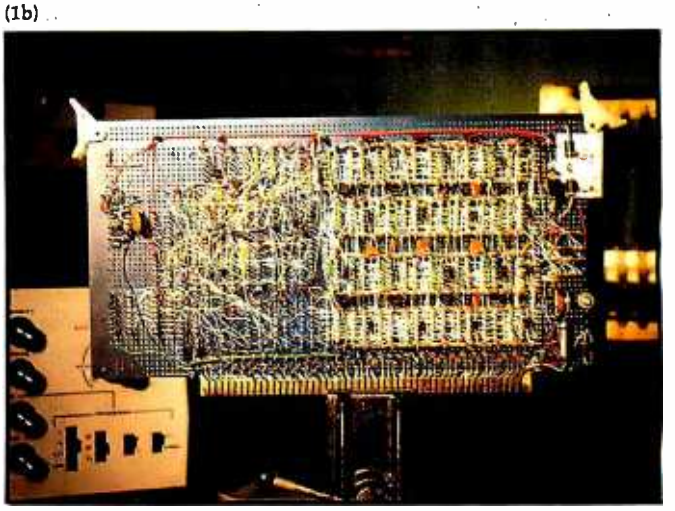

Photos 1a and 1b: *The wire-wrapped prototype memory board. Photo 1a shows the general layout used to minimize wire lengths. At left are the power supply and the bus terminations. Photo 1b is the back of the board. S-100 lines are blue, and the power-supply lines are solid AWG 18 copper. To avoid loops, all grounds are connected at the S-100 ground pin only.*

these voltages can be slightly higher.)

Sixteen address lines specify an address, which must be valid when a cycle is requested. The card places fetched data on eight DIN (data-input) lines and receives data to be written over eight DOUT (data-output) lines. (You may use the same eight wires for these two functions, if your other cards allow it.)

The signal on line sMEMR rises when the address is stable and the bus wants data from memory. It falls when the bus has sampled the data.

When MWRT rises and when address and data are stable, the memory should store data. It falls at least 200 nanoseconds (ns) later.

The line pRDY is an input to the processor that any card may pull low. The signal on line pRDY indicates to the processor to slow down. The memory card pulls pRDY low whenever the memory card may not be ready for the processor to proceed. In normal operation, the memory doesn't make the processor wait, but if cycle requests are piling up, pRDY can prevent the (disastrous) loss of a cycle.

Those are all the signals I really need, but two others will improve the performance of the memory in a system. M1 indicates there will be an idle period of at least 400 ns after the current cycle is done. The memory board performs an internal cycle during that period. $\overline{\text{PHANTOM}}$, when low, turns off the buffer that drives DIN. It

	2114 (1K by 4-bit) static	4116 (16K by 1-bit) dynamic
Number of devices for 64K bytes	128	32
Price of 16K bytes (memory devices only)	$64	$12
Number of support devices required for S-100 interface	5 to 10	20 to 30
Cost of 64K-byte S-100 board	$350 (two cards)	$180 (do-it-yourself)
Power required for 64K bytes	50 W	10 W
Ease of interface design	very easy	difficult

Table 1: *A comparison of the most common static and dynamic memories.*

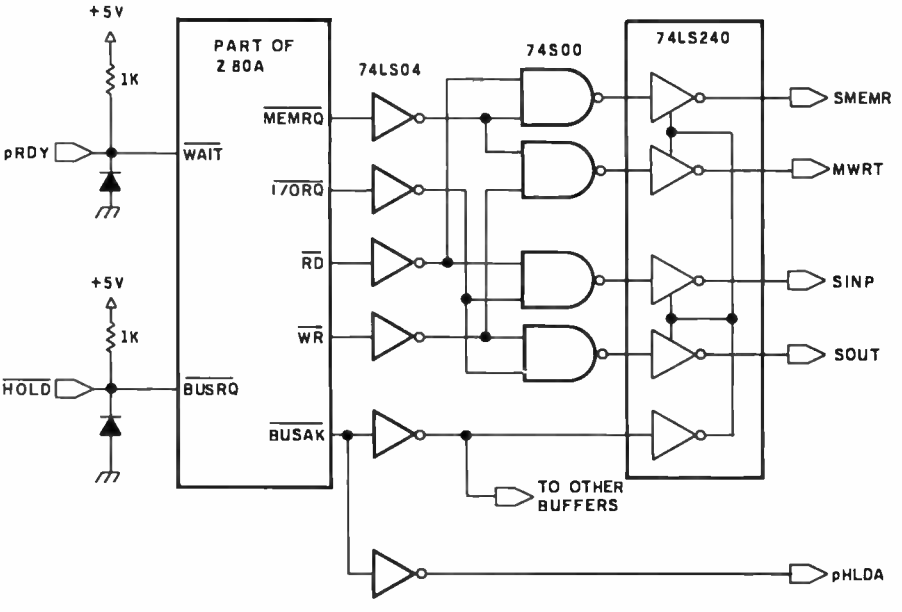

Figure 1: *Developing S-100 bus signals from a Z80 microprocessor.*

www.americanradiohistory.com

60

Micro-Priced™ PC Programs.

We've got the widest selection of IBM PC software, at the lowest possible everyday prices. Micro-Pricing™ guarantees it. Plus, you'll get top notch, toll free, tech support to boot.

IBM PC Software	Micro-Price™
Ashton Tate®	
dBASE II	$479
Byrom Software	
BSTAM	179
BSTMS	179
Condor® Computer	
Condor 20-I	229
Condor 20-II	495
Condor 20-III	795
Condor 20-R	249
Condor 20-Q	139
Digital Research	
Concurrent CP/M 86	309
Level 2 Cobol 86	1,299
Pascal MT + 86	499
SPP 86	189
SID 86	129
Eagle Software	
Money Decisions	179
Tax Decisions	279
Information Unlimited Software®	
EasyWriter II	$289
Easy Speller	139
Easy Filer	329
Innovative Software Applications®	
SP/LAW	99
Innovative Software Inc.®	
TIM III	399
International Software Marketing®	
MatheMagic	85

128K RAMCard Board	$429
192K RAMCard Board	609
256K RAMCard Board	699
64K RAMChips	139
Microstuf®	
Crosstalk	139
Transporter	219
Northwest Analytical®	
StatPak	399
Organic Software	
Datebook	329
Milestone	329
Testwriter III	109
Sorcim®	
SuperCalc	199
SuperWriter	289
SpellGuard	239
SuperCalc Demo	75
SpellGuard Demo	55
VisiCorp®	
VisiCalc	199
Desktop Plan	249
VisiDex	199
VisiTrend	249
VisiFile	249
VisiSchedule	249
VisiTrend/Plot	249
Business Forecasting Models	89

Lexisoft	
Spellbinder	$279
Mark of the Unicorn	
Final Word	250
PC-InterComm	89
Metasoft	
Benchmark (Word Processor)	409
Benchmark (Maillist)	219
Microsoft®	
MultiPlan	239
Flight Simulator	41
64K RAMCard Board	289

Plus we have a full line of products from American Training International, MicroPro, and many other manufacturers.

AND COUNTING.

We're adding the best of the PC programs all the time. If you don't see what you want, call us toll free.

standard software
CORPORATION OF AMERICA

1-617-963-7220 · 1-800-343-0852

CO-RI Bldg., Rt. 28, Avon, MA 02322 Telex No. 947802
Mon.-Fri., 8:00 A.M.-8:00 P.M. EST Sat. 10:00 A.M.-4:00 P.M. EST

To order simply call Standard Software direct at 1-800-343-0852. In Massachusetts call 1-617-963-7220. Or mail to the address above. Payment: Orders may be prepaid by VISA, MasterCard, American Express, check or money order. Orders prepaid by check or money orders may deduct 3% from the price of software only. C.O.D. orders please add $1.50. Massachusetts residents must add 5% sales tax. Postage, handling and shipping charges will be added to orders as they apply. See below. Shipping is by UPS on all orders, unless specified. Emergency overnight shipping is available. Purchase orders are accepted from qualifying companies and institutions. All items subject to availability and price change without notice.

allows you to map other devices inside an enabled 8K-byte block of memory. Usually these other devices are ROM (read-only memory), and they are required to pull down PHANTOM while they drive the DIN lines.

Those are all the signals necessary to operate a high-performance (2-million-bytes-per-second) memory on the S-100 bus, Z80 version.

The 8080 version of the bus, which is described in the IEEE-696 specification (see reference 4), is more complex. The lines sMEMR and MWRT contain nonsense most of the time because the 8080 does not synchronize its status lines with its bus cycle requests. The original S-100 machine (the MITS Altair) didn't provide any correction of this nonlatched status on its processor board, and the processor instead produced a pulse (pSYNC and Φ1) to operate a latch on each of the other boards. Since no new machines are being built using the Intel 8080 microprocessor, I've shown the status latch as an option for users of the older equipment. This latch is required to meet the IEEE specification. Three extra signals, pSTVAL (also called Φ1), pSYNC, and pDBIN, are necessary. When pSTVAL goes low, status may be valid, and when pSYNC is high, pSTVAL is meaningful. The logical AND function is used to combine these two signals. Because sMEMR can't be used to gate data onto DIN, pDBIN is used instead. The line pDBIN is also active when the processor reads an I/O (input/output) port. Sometimes, analogous lines are used to synchronize a write (pWR or sWO), but they are redundant with MWRT.

To complete the introduction, I'll describe some of the things that may happen on the bus and that a memory must ignore.

To achieve synchronization, many peripherals hold up the processor until they have data. These devices may hold pRDY low for a long time, while a disk rotates, or a printer prints, or a glacier approaches the sea. While pRDY is low, the bus is idle, but at the same time, memory needs the bus signals in order to retain data. The card doesn't depend on

Circle 473 on inquiry card.

www.americanradiohistory.com

End S100 Bus Single Board Computer and Memory Confusion

The S100 bus has come a long way.

The old standards, 64, 8 or even 2K of memory, and separate boards for I/O, processing, floppy control and a host of other functions, are obsolete.

If you use S100 boards, that's great news.

And bad news.

The great news is you can buy, off the shelf, incredibly sophisticated S100 single board computers and memories.

Now the bad news.

With different prices and features on dozens of available boards and the fact that some boards are still more sophisticated than others, it's getting tough to decide what boards to buy for particular applications.

Intercontinental Micro Systems can help.

Call or write today and we'll send you information defining the state of the art in S100 bus memories and SBCs. We'll explain DMA, memory management, vectored priority interrupt inputs, RAM disk, parity error detection, window deselection and a host of other newly available features.

There is a catch.

When you call or write, we'll tell you about our super-sophisticated CPZ-48000 single board computer, our 256KMB-100 bank selectable or linear memory and a complete line of personality boards that allow you to easily interface with anything from floppies to winnies, including printers and modems.

Call or write today and find out how Intercontinental Micro Systems can solve your S100 bus SBC and memory problems.

We think once you know state-of-the-art, you'll want Intercontinental Micro.

INTERCONTINENTAL MICRO SYSTEMS CORPORATION

Circle 222 on inquiry card.

1733 South Douglass Road, Suite E Anaheim, California 92806 (714) 978-9758 Telex: 678401-TAB-IRIN

www.americanradiohistory.com

bus activity for refreshing data, and I've held pRDY (also called WAIT) low for 72 hours with no data loss.

Other peripherals work so fast they have to take control of the bus and use the memory themselves via DMA (direct memory access). In the Z80 version of the bus, there may be spikes (brief pulses) on the active-high signals MWRT and sMEMR when a transfer of control takes place. The memory must, therefore, ignore pulses of less than 100-ns duration on these lines. Extra sMEMR signals are all right, but an extra MWRT is a disaster. I've filtered MWRT to reject such pulses.

Finally, many older machines use hardware front panels, on which the operator reads and writes with push buttons. To read memory at human speed, the output data must stay valid as long as sMEMR stays high. I've used an output latch that holds data until the next cycle. Some designs I've seen do not latch the data indefinitely, and they may not work with a bus controller as slow as a push button.

Now that I've sketched the problem of using the S-100 bus, I'll summarize the requirements of the 4116 dynamic memory device and show how to build and use the card.

4116 Makes Demands

To understand how the board works, you must first know what the bus provides and what the 4116 requires. I'll only abstract the 4116 specification sheet, so you should send for one if you want all the details (see table 2).

For $48 you can fill this card with 4116s and your directly addressable Z80 memory space with thirty-two 16-pin DIPs (dual-inline packages). Each stores 16,384 bits as charges in a grid of 0.03-picofarad (pF) capacitors. Because the charges leak away, the cells must be refreshed (read into a latch and rewritten) at least 500 times per second. Any memory-access cycle refreshes 128 bits, so that they will last for another 2 milliseconds (ms). But that complication aside, the inputs are practically TTL-compatible, and the DC (direct current) power drawn is very small. Current is drawn by 4116s in RF (radio-frequency) pulses, with a small DC bias added.

Vendor	Vendor's number for 4116
Advanced Micro Devices 901 Thomson Place Sunnyvale, CA 94086 (408) 732-2400	Am9016E
Hitachi America Ltd. 707 West Algonquin Rd. Arlington Heights, IL 60005 (312) 593-7660	HM4716A
Intel Corporation 3065 Bowers Ave. Santa Clara, CA 95051 (408) 734-8102	2116
ITT Semiconductors 470 Broadway Lawrence, MA 01841 (617) 688-1881	ITT 4116
Mostek Corporation 1215 West Crosby Rd. Carrollton, TX 75006 (214) 323-6000	MK 4116
NEC Electronics U.S.A. Inc. Microcomputer Division One Natick Executive Park Natick, MA 01760 (617) 655-8833	μPD416
Texas Instruments Semiconductor Group POB 225012 Mail Stop 308 Dallas, TX 75265 (214) 238-6611	TMS4116
Toshiba America 2151 Michelson Dr. Suite 190 Irvine, CA 92715 (714) 955-1155	TMM416
Zilog Inc. 315 Dell Ave. Campbell, CA 95008 (408) 370-8000	Z-6116

Table 2: *Vendors that can supply specification sheets for 4116-type memories. If you send a self-addressed 9- by 12-inch envelope with 50 cents in stamps, you will usually receive a data sheet by return mail.*

The memory circuits can perform six kinds of cycles, but I use just the simplest three: read, write, and refresh-only. You could think of the general memory cycle as a string of five clock periods, as shown in figure 2a and b. The common 4116 with an access time of 200 ns would have periods of 67 ns.

A memory-access cycle begins with the falling edge of $\overline{RAS}$ (Row Address Strobe), which makes the device sample 7 bits of an address. This portion of the address controls which row of memory cells inside the device will be refreshed. As soon as the second 7-bit address value on the address pins is valid, $\overline{CAS}$ (Column Address Strobe) may go low. $\overline{CAS}$'s falling edge makes the 4116 sample its address, write-enable, and data-input pins. The other inputs must remain stable until the beginning of the third clock period. WR (write) can alter the data any time $\overline{CAS}$ is low.

If $\overline{CAS}$ stays high (inactive), a $\overline{RAS}$-only refresh occurs; the row of bits is rewritten, so they are recharged for another 2 ms. $\overline{RAS}$ must be low long enough for the refresh to work, an interval that coincides with the ICs' advertised access time (200 ns).

After the third clock period, output data is ready, and you may let $\overline{RAS}$ and $\overline{CAS}$ rise. The output data becomes invalid when $\overline{CAS}$ rises. After $\overline{RAS}$ rises, the 4116 must be left alone for two more clock periods. The whole cycle takes 375 ns. You may stretch any of the clock periods out to 5 microseconds (μs) or so, but each row must be refreshed every 2 ms. Figure 2b shows a cycle in time, drawn to scale.

The 4116s require little DC (the whole card takes half an amp at +12 V, running full tilt with a 4-MHz Z80), but they "drink" RF energy. The supply current is drawn in a burst after each strobe edge (when $\overline{RAS}$ or $\overline{CAS}$ changes). Capacitors must be mounted near each memory device for quick action. The +12-V supply operates the circuitry of the 4116 and must be less than 10 percent noise. The −5-V supply keeps internal diodes cut off. A word of warning: it must be more reliable than the other supplies. The presence of a +12 voltage without a −5 voltage will damage the memory with the very next strobe. The +5-V supply is used only by the memory to generate a logic 1 and thus makes far less noise.

All the signal inputs of a single 4116 may be driven by LS (low-power Schottky) TTL levels. Unfortu-

www.americanradiohistory.com

IBM memory at realistic prices:

256K WITH AN RS-232C INTERFACE **$349**

$529 WITH SUPERCALC

512K WITH AN RS-232C INTERFACE **$579**

$749 WITH SUPERCALC

Both of these fully-populated memory boards include parity checking and a standard RS-232C interface. They are compatible with all IBM software.

You can expect these boards to meet the highest standards of design and manufacturing quality available — at any price. We are proud to guarantee them fully for a period of two years.

To order or for information call

In New York:
(212) 509-1923

In Los Angeles:
(213) 706-0333

In Dallas:
(214) 744-4251

By Modem:
(213) 991-1604

Alpha Byte
COMPUTER PRODUCTS

31245 LA BAYA DRIVE
WESTLAKE VILLAGE, CA 91362

We accept VISA and MasterCard on all orders; COD orders, up to $300.
Shipping charges: $3 for all prepaid orders, actual shipping charges for non-prepaids; $3 for COD orders under 25lbs. ($6 for over) plus a $4 surcharge; add 15% for foreign, FPO and APO orders. Calif. add 6% sales tax, L.A. County add 6½%.

Circle 15 on Inquiry card.

www.americanradiohistory.com

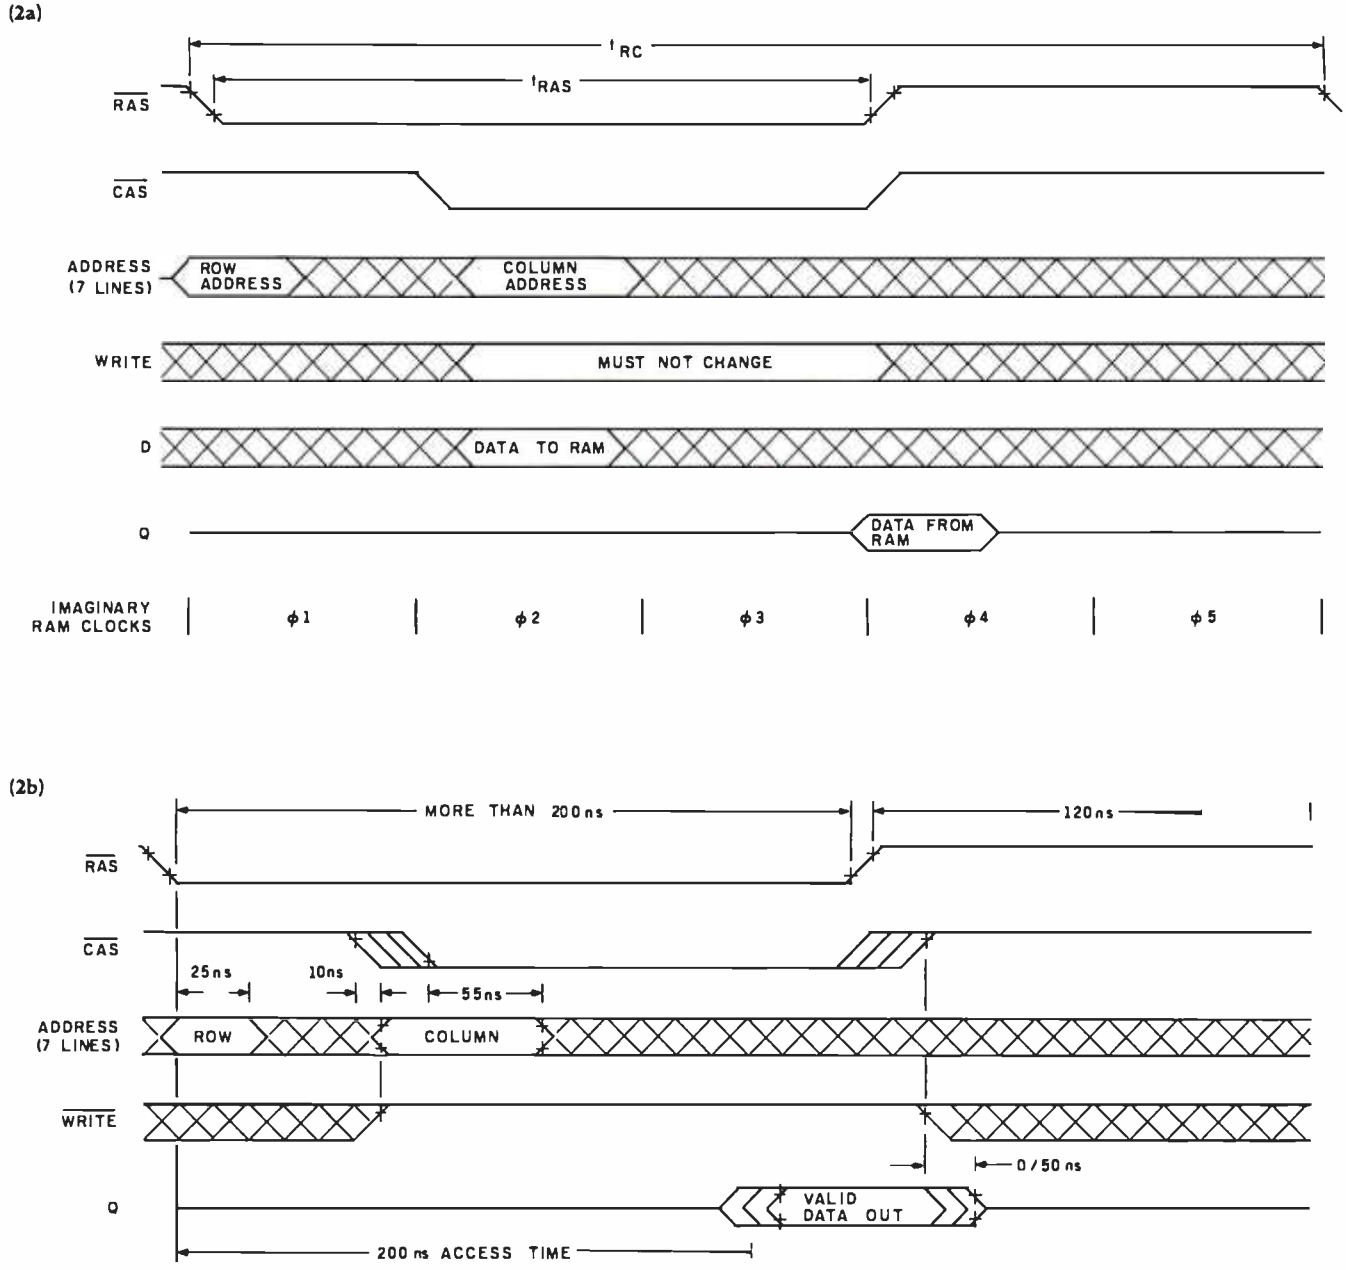

Figures 2a and 2b: *Timing relationships of the 4116-type dynamic memory. Figure 2a shows how the cycle time of the memory can be considered as five imaginary periods. In this figure, t_{RAS} is the advertised access time. Figure 2b is a read cycle drawn to scale. Valid data may terminate from 0 ns to 50 ns after the trailing edge of* $\overline{WRITE}$.

nately, when you tie 32 MOS inputs together in a grid, it works like a long piece of cable. When a fast pulse like $\overline{RAS}$ or $\overline{CAS}$ hits the open end of a cable, it bounces back, upside down. Since a −3-V pulse may destroy the data in a 4116 and the bouncing reflections wreck the timing, any line to eight or more MOS inputs must be terminated to absorb falling edges. Clamping diodes and pullup resistors are used. Series resistors at the source work by slowing the fall time of the pulses. For more about transmission-line effects, see the references.

Now you see how these popular devices got their reputation for interface complexity: they deserve it!

Support Circuitry

Now that the 4116s and the bus are less mysterious, you can follow the block diagram (figure 3) and the schematic diagram (figure 4) to understand how the board works. The functions of the support devices are given in table 3.

The power supplies that regulate the voltages applied to the TTL and the memories deserve special attention. Diodes ensure that the last supply to quit after power is removed will be −5 V. They also protect the memories if the −16-V supply fails. Three separate grids of heavy wire (one for each supply) and thirty-two

www.americanradiohistory.com

"... GOOD MORNING,... I'M YOUR SUBSTITUTE TEACHER MRS. MALONE, FILLING IN FOR YOUR COMPUTER WHICH IS BEING REPROGRAMMED. DON'T EXPECT ME TO GENERATE GRAPHICS, PLOT, PRINT OUT OR SOLVE COMPLICATED MATH FUNCTIONS,... I'M ONLY HERE FOR ONE DAY..."

INTERSTELLAR DRIVE™

A SOLID STATE DISK EMULATOR

Save valuable time!
5 to 50 times faster performance than floppy disks and Winchester drives

PION'S INTERSTELLAR DRIVE is designed for use with a family of interfaces and software packages. Currently available are interfaces for IBM, S100, TRS80, Apple, SS50, and most Z80 uP, and software for most popular operating systems. Additional interfaces are continually being developed for the most popular computers.

SAVE MONEY!
Increase your computer's productivity

The INTERSTELLAR DRIVE is a high performance data storage subsystem with independent power supply, battery backup, and error detection. It has 256KB to 1 Megabyte of solid state memory integrated to perform with your operating system.

Basic Price for 256KB unit [Includes interface and software]
$1095. *plus tax (where applicable) and shipping*
Visa and Master Card accepted.

PION, INC. Tel.(617)923-8009
101R Walnut St., Watertown, MA 02172

TRS80 trademark of Tandy Corp. Apple trademark of Apple Computers
Interstellar Drive trademark of PION, Inc.

www.americanradiohistory.com

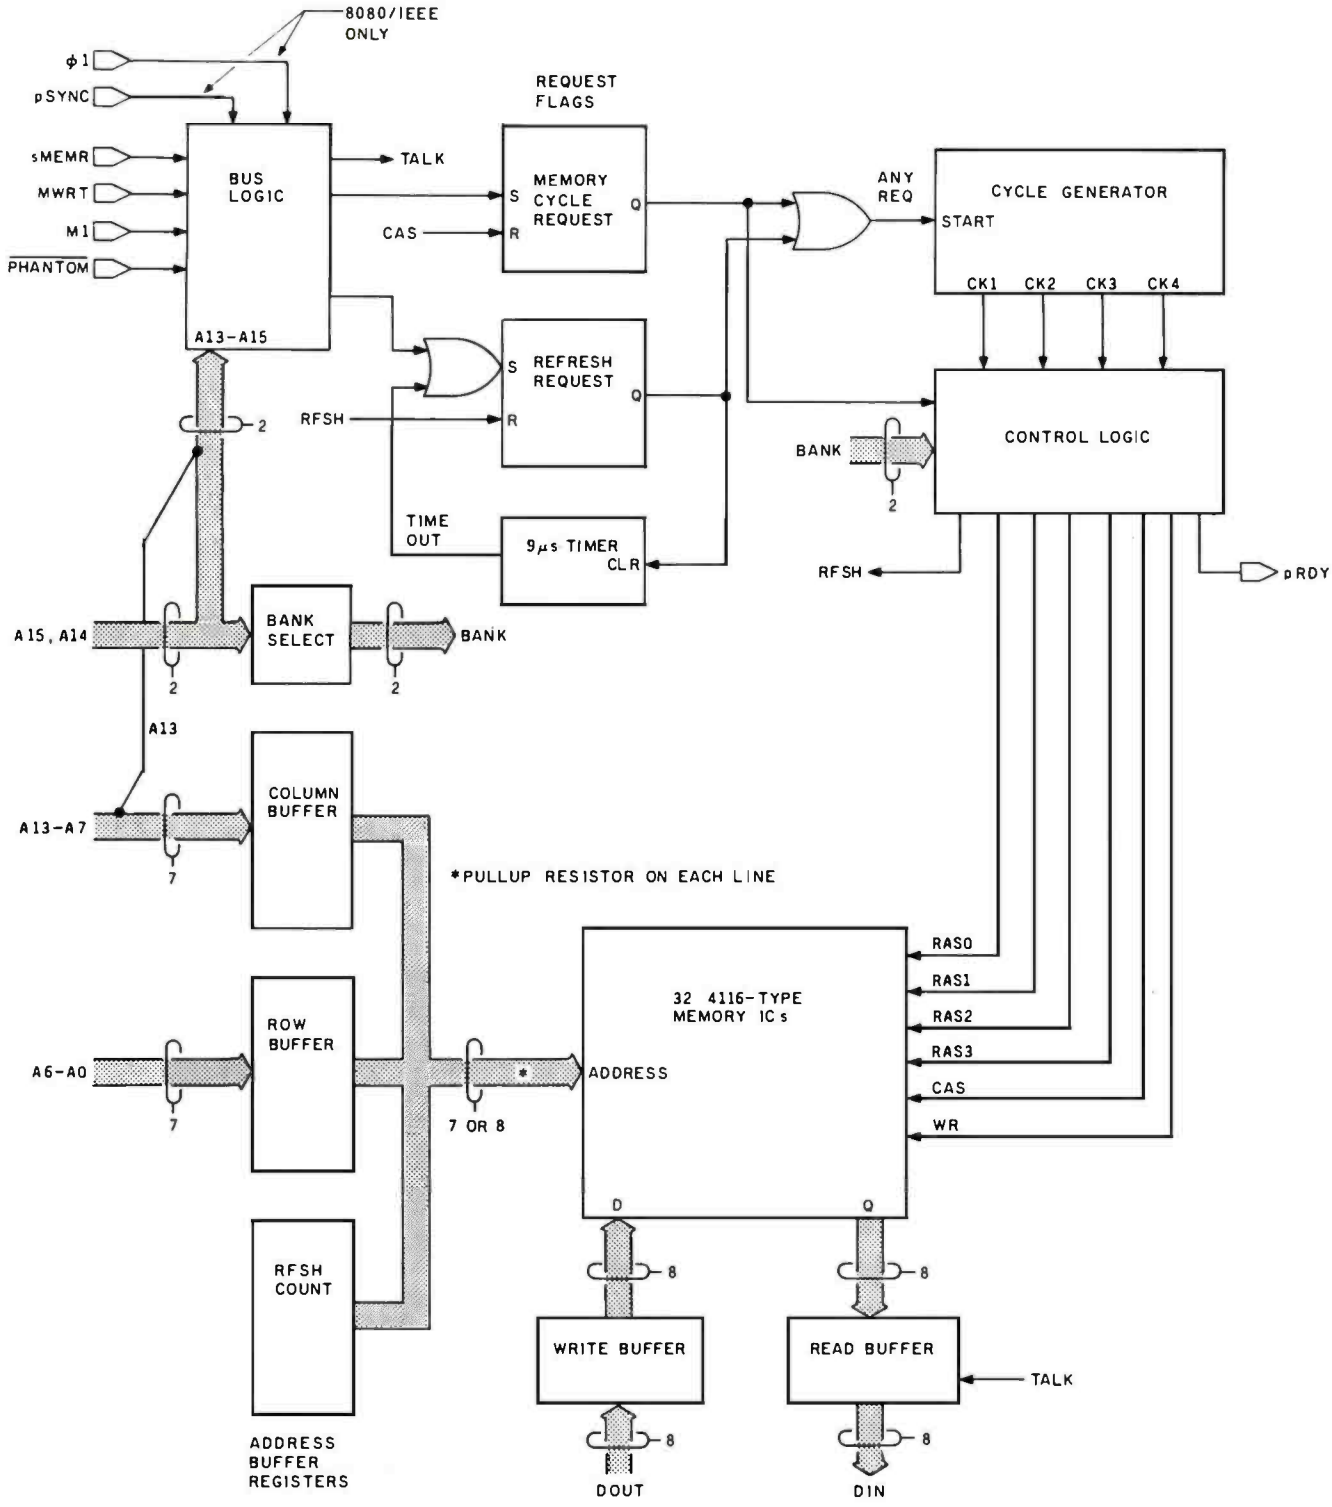

Figure 3: *A block diagram of the 64K-byte dynamic memory board.*

0.1-microfarad (μF) ceramic capacitors prevent the memories from injecting more than a volt of noise onto the supplies. Such noise would keep the sense amplifiers in the memory devices from working reliably.

Inputs from the bus are translated into refresh-cycle requests by the block labeled Bus Logic in figure 3 (see figure 4, page 320, for the specific TTL involved) and into $\overline{\text{TALK}}$, the signal that enables the output buffer (labeled Read Buffer in figure 3, IC24 in figure 4, page 323). Using the top three address bits, IC33 (see figure 4, page 321), a multiplexer selects one of the eight jumpers at J1 to see if the 8K-byte block addressed is enabled and generates the signal MADDR. For IEEE-696 versions of the board, status of the bus is latched (see figure 4, page 320) to ward off extra cycles and MWRT is filtered to reject noise. The resulting status signals (Z80MEMR and

www.americanradiohistory.com

Now our $29.95 complete Pascal for CP/M is an even better bargain...

WHAT THEY SAID ABOUT JRT PASCAL 2.0:

CREATIVE COMPUTING, Nov. '82 "...While 'there is no such thing as a free lunch,' JRT Pascal at $29.95 (which includes postage) certainly allows the user to experience champagne and caviar at cafeteria prices..."

INTERFACE AGE, Oct. '82 "...JRT Pascal is following the example set by Software Toolworks (Sherman Oaks, CA) of offering quality software at extremely low price..."

INFOWORLD, Aug. 16, '82 The magazine's 'Software Report Card' rated JRT's documentation 'good' and performance, ease of use and error handling 'excellent'—the highest rating.

AND NOW: JRT PASCAL 3.0—

with all the features that earned 2.0 so much praise—PLUS the many new features shown here. The price?—**still just $29.95!** This astonishing price includes the complete JRT Pascal system on diskettes and the new expanded user manual. Not a subset, it's a complete Pascal for CP/M.*

Faster and more reliable than ever, for beginner or expert, engineer or businessman, JRT Pascal 3.0 provides a set of features unequaled by any other Pascal... or any other language.

OUR NO-RISK OFFER:

When you receive JRT Pascal 3.0, look it over, check it out, compare it with similar systems costing ten times as much. If you're not completely satisfied, return it—with the sealed diskettes unopened—within 30 days, and your money will be refunded in full. That's right: *satisfaction guaranteed or your money back!*

A JRT bonus: if you want to copy the diskettes or manual—so long as it's not for resale—that's o.k. with us. Pass it on to your friends. But don't delay. Send the coupon or phone today and start enjoying the Pascal advantage; *at $29.95, there's no reason to wait!*

announcing new JRT Pascal 3.0...

NEW Full support for indexed files

NEW CRT screen formatting and full cursor control

NEW Facilities for formatting printed reports

Graphing procedures

Statistic procedures

14 digit BCD FLOATING POINT arithmetic

True dynamic storage

Advanced assembly interface

NEW File variables and GET/PUT

NEW Dynamic arrays

Random files to 8 megabytes with variable length records

64K dynamic strings

Activity analyzer prints program use histogram

No limits on procedure size, nesting or recursion

More than 200 verbal error messages

Maximum program size: more than 200,000 lines

Separate compilation of auto-loading external procedures

Extended CASE statement

Fast one-step compiler; no link needed

Efficient compiler needs only 85K diskette space

NEW Handy JRT Pascal reference card

NEW 175-page user manual with protective 3-ring binder and 5-1/4" or 8" diskettes

NEW SEARCH procedure for fast table look-up

...still only $29.95!

JRT PASCAL 3.0

Send to **JRT SYSTEMS**
550 Irving Street/A11
San Francisco, CA 94122

or phone **415/566-5100**

Here's my $29.95; please send me JRT Pascal. I understand that if I'm not completely satisfied, I can return it within 30 days—with the sealed diskettes unopened—for a full refund. (Allow 2-3 weeks for shipping.)

I need the 5-1/4" diskettes for ☐ Apple CP/M; ☐ Heath, Hard Sector; ☐ Heath, Soft Sector; ☐ Northstar; ☐ Osborne; ☐ Superbrain; ☐ Televideo; ☐ Xerox 820. **I need ☐ 8" SSSD diskettes.**

Name _____

Address _____

City _____ State _____ Zip _____

☐ Check ☐ C.O.D. ☐ MasterCard ☐ VISA

(CA residents add sales tax. Add $6 for shipping outside North America.)

Card # _____ Exp. _____

Signature _____

*CP/M is a Digital Research TM. A 56K CP/M system is required.

Circle 234 on inquiry card.

www.americanradiohistory.com

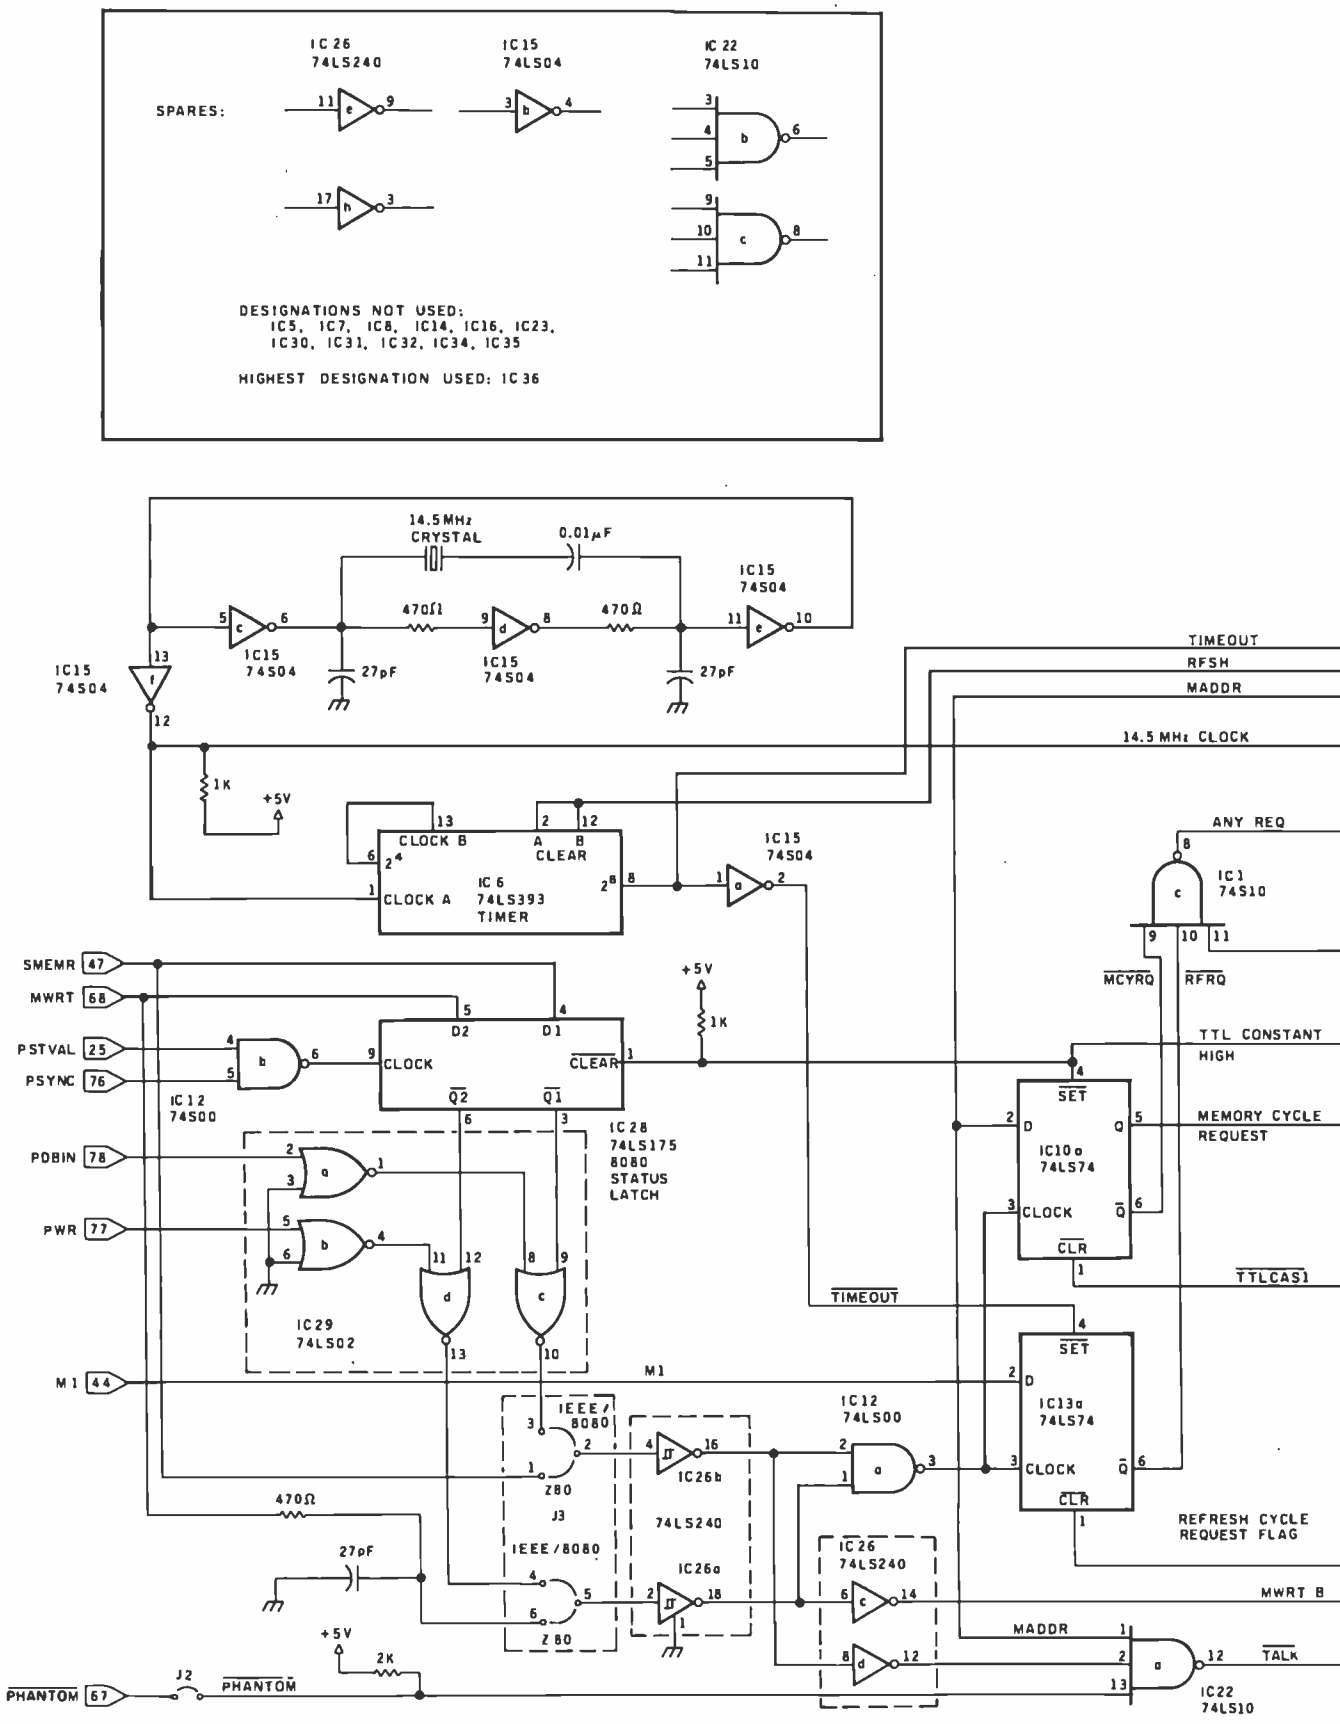

Figure 4: *A schematic diagram of the 64K-byte dynamic memory board (continued on page 322).*

www.americanradiohistory.com

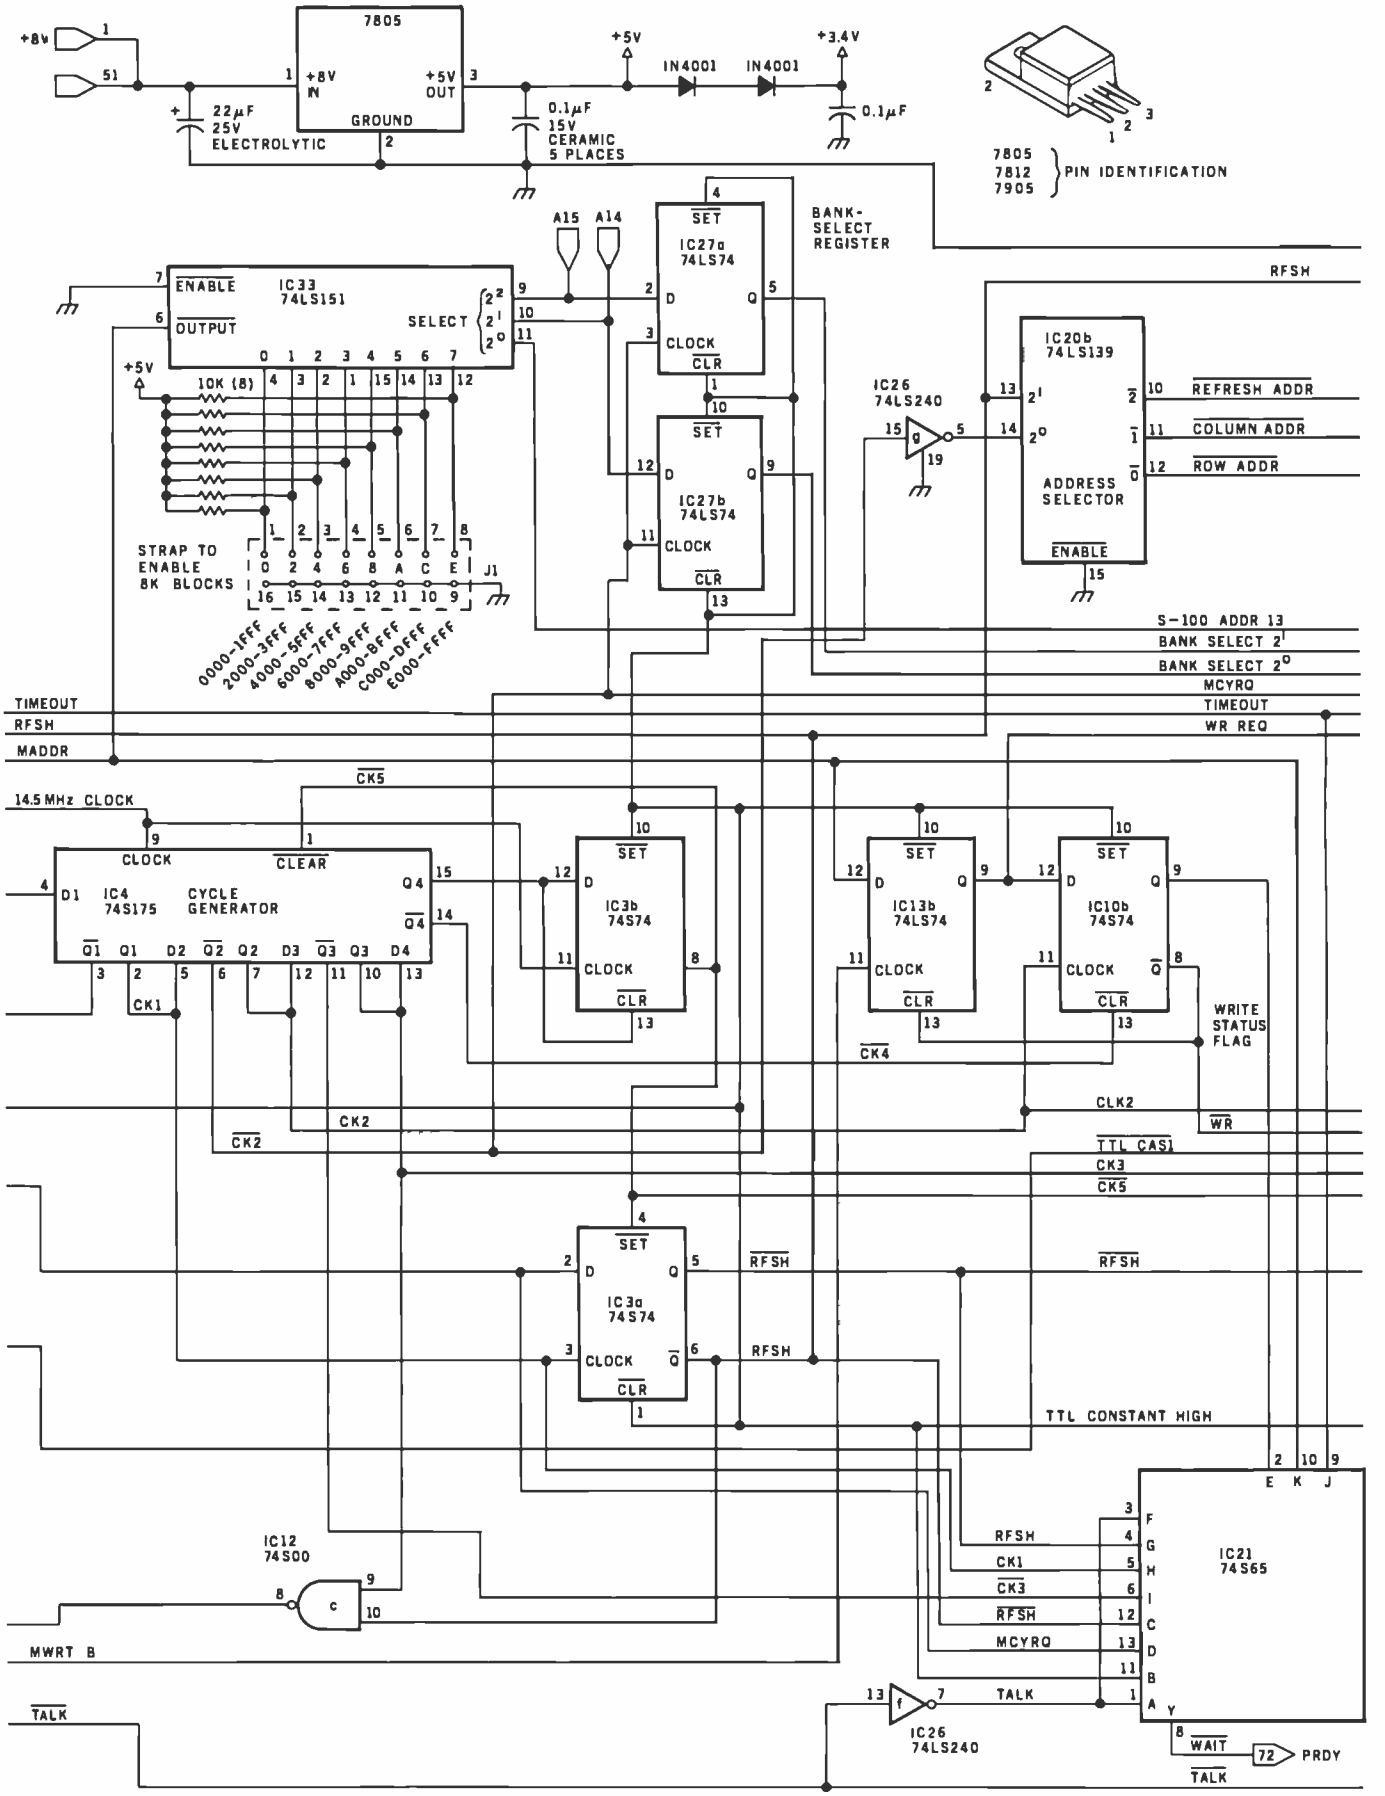

www.americanradiohistory.com

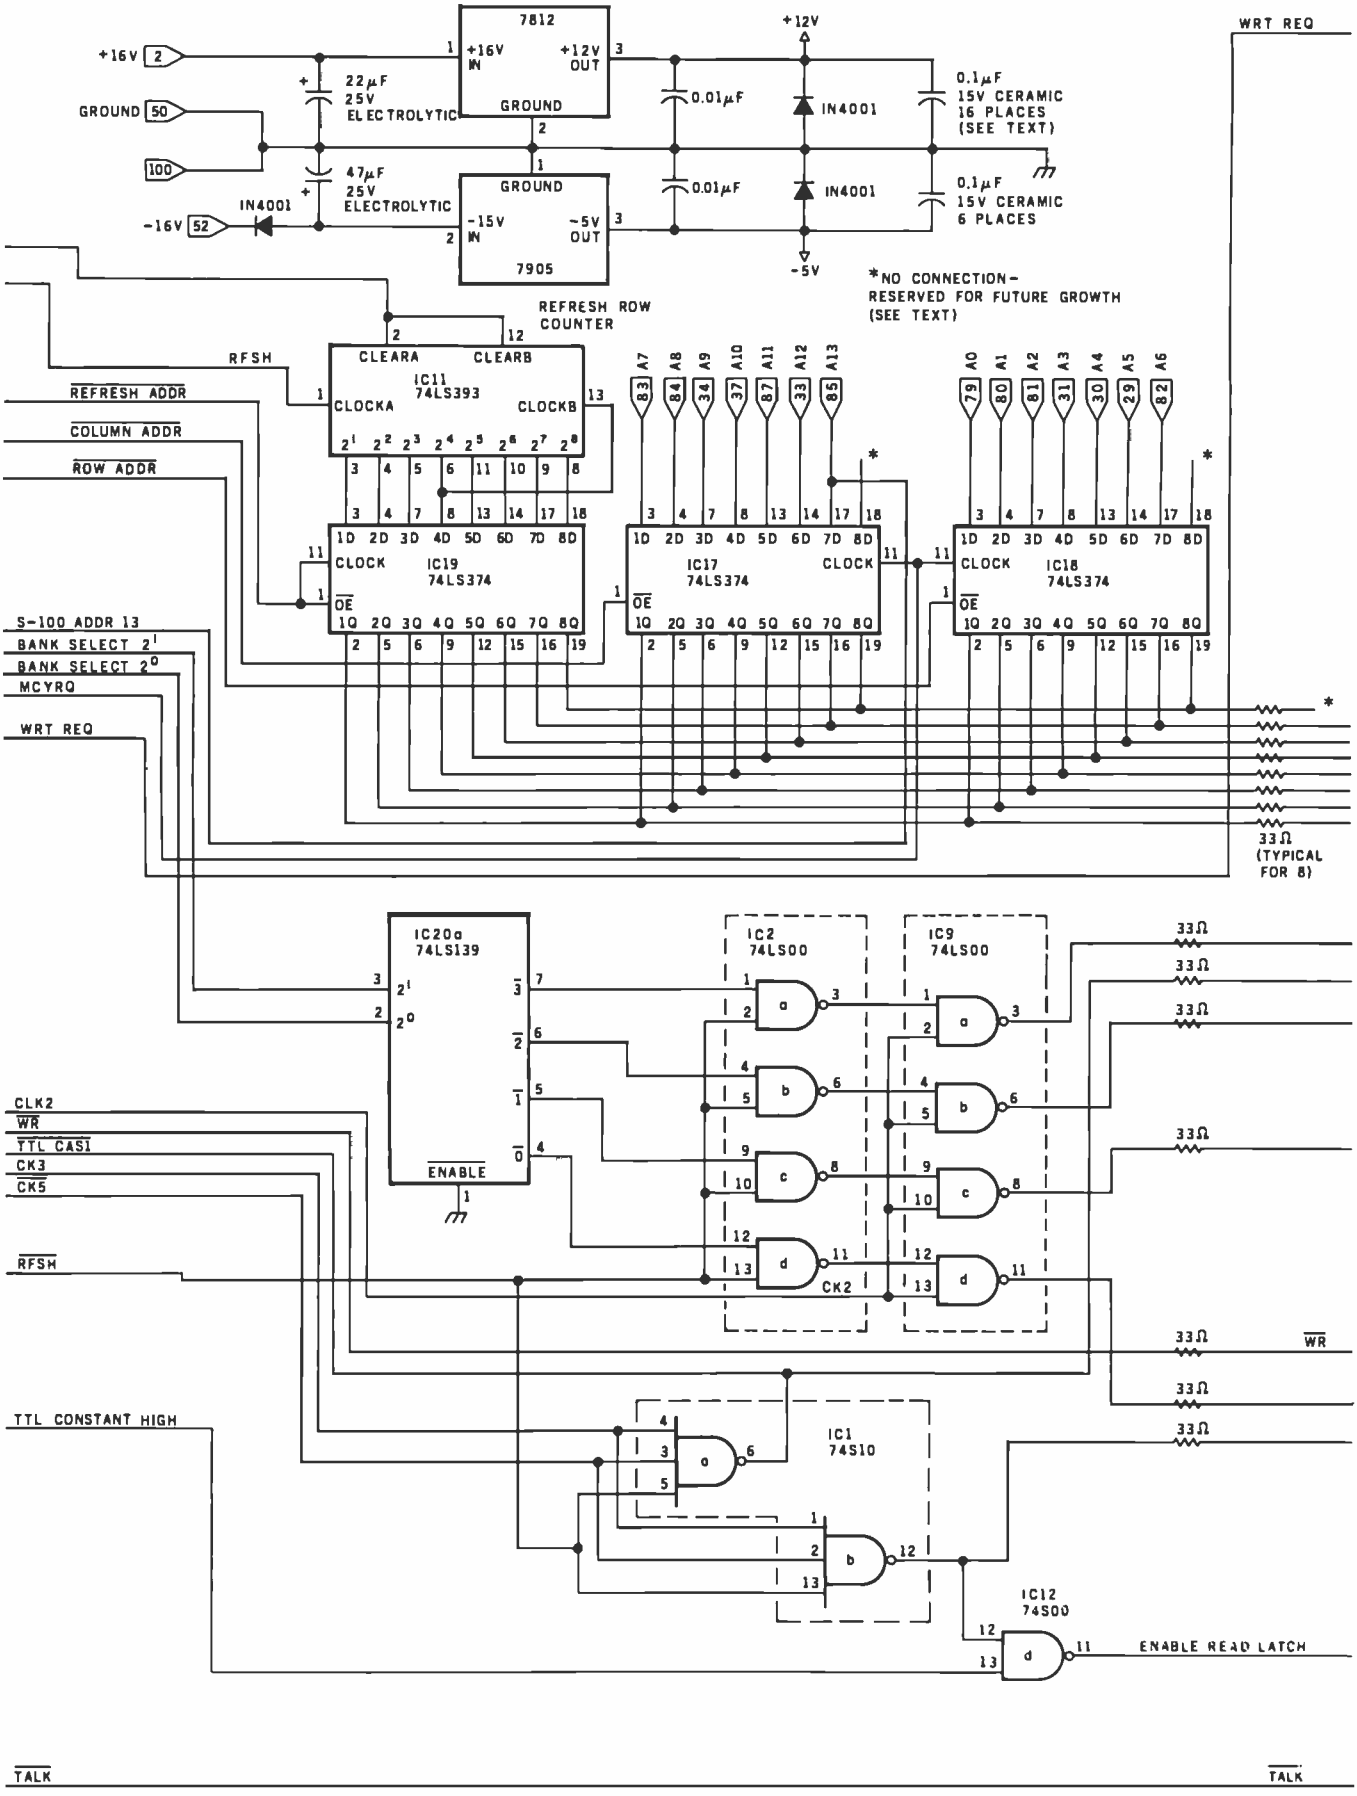

Figure 4 (continued from page 321): *A schematic diagram of the 64K-byte dynamic memory board.*

www.americanradiohistory.com

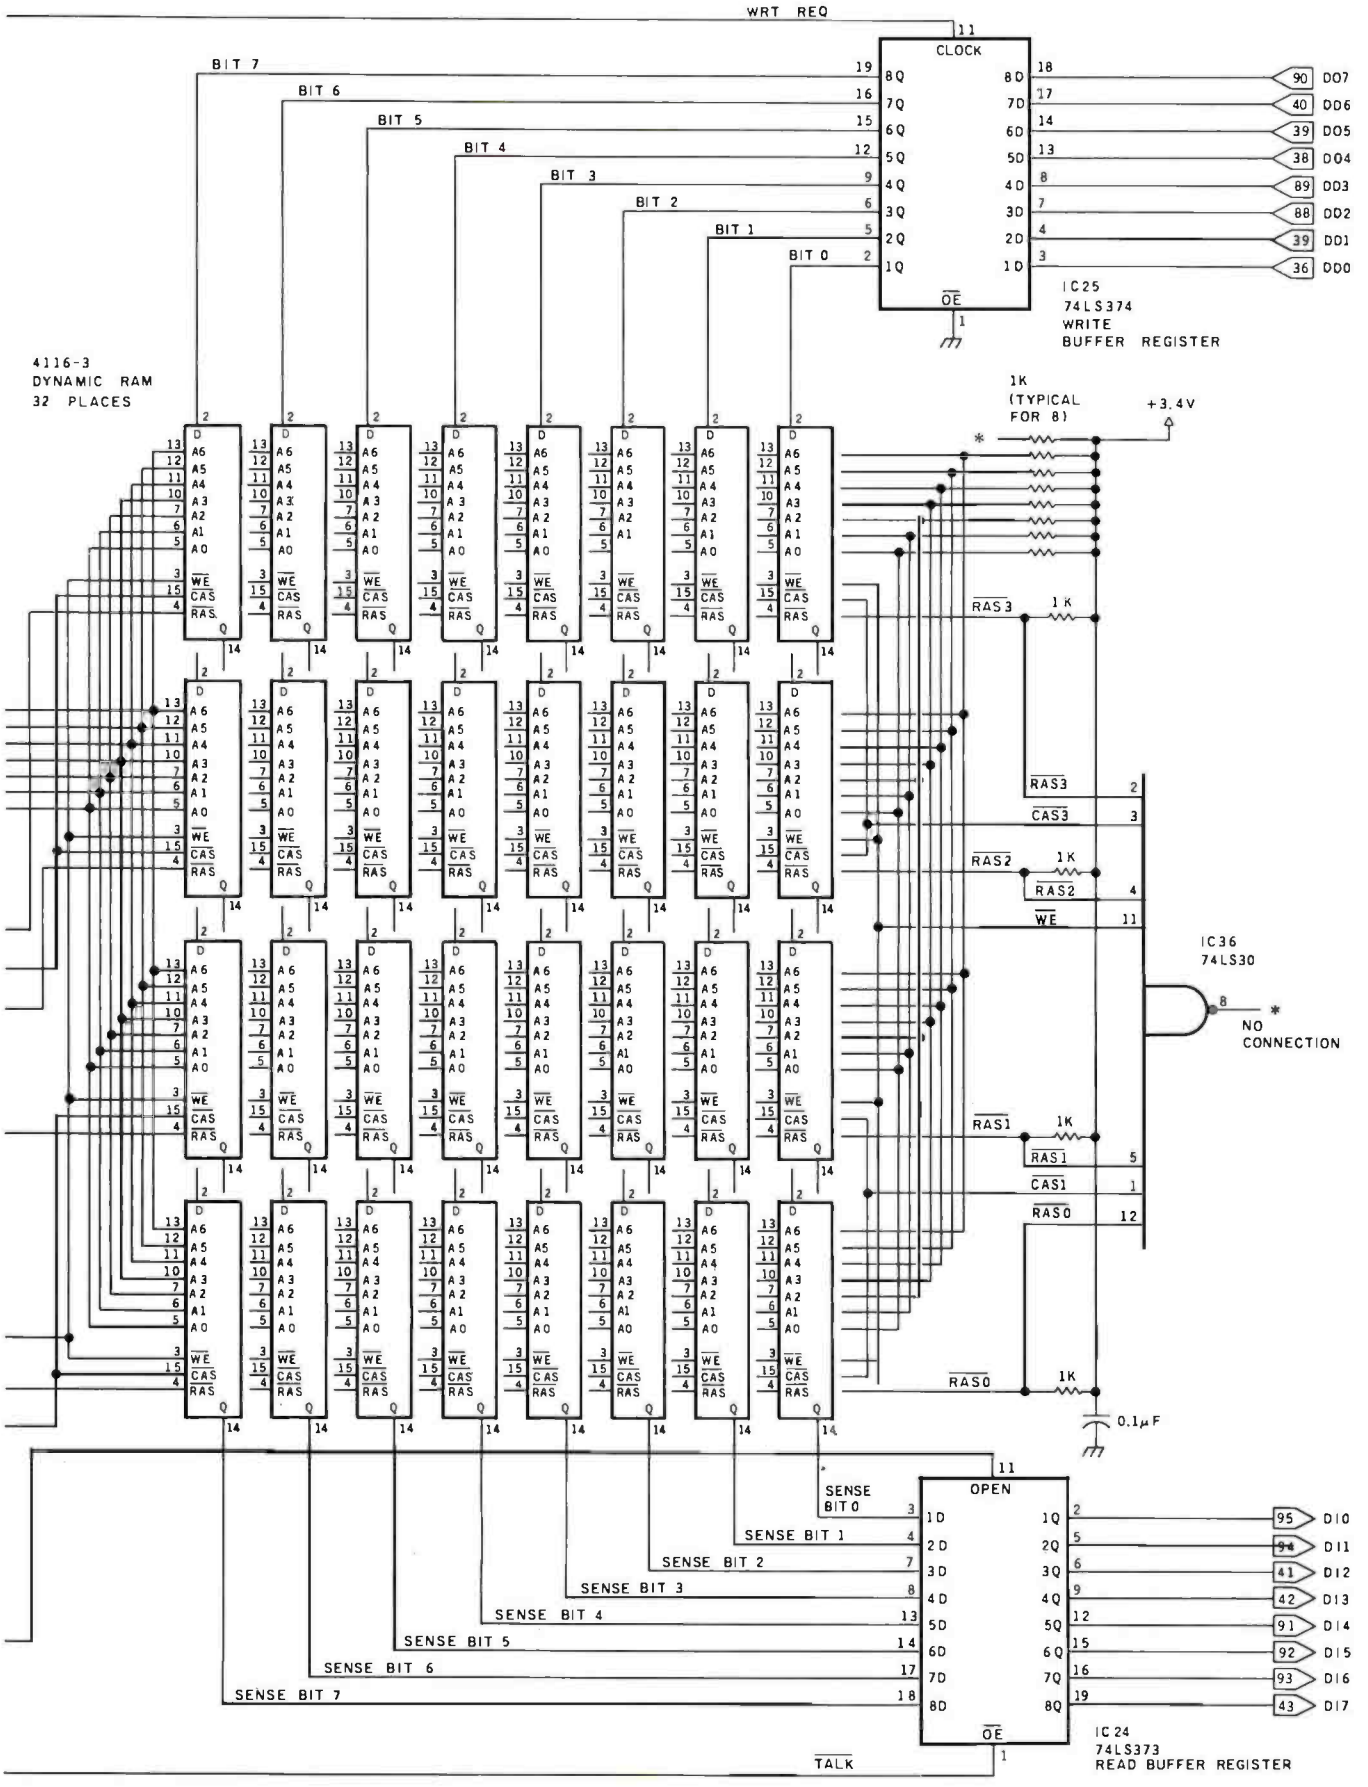

www.americanradiohistory.com

Unit	Type	Function
1	74S10	$\overline{CAS}$ gate, $\overline{TALK}$ gate
2	74LS00	$\overline{RAS}$ enable
3	74S74	CK5, MEM/RFSH arbitration and status flag
4	74S175	Cycle generator
6	74LS393	Refresh timer
9	74S00	$\overline{RAS}$ gates
10	74S74	Memory request, write status flags
11	74LS393	Refresh row counter
12	74S00	"Glue"
13	74LS74	Write, refresh request flags
15	74S04	Clock
17	74LS374	Column address buffer register
18	74LS374	Row address buffer register
19	74LS373	Refresh address buffer register
20	74LS139	Bank, cycle interval decoder
21	74S65	$\overline{WAIT}$
24	74LS373	Read data buffer register
25	74LS374	Write data buffer register
26	74LS240	Line receiver, inverters
27	74LS74	Bank select buffer register
28	74LS74	Status latch (8080, IEEE only)
29	74LS02	Status gate (8080, IEEE only)
33	74LS151	Memory address decoder
36	74LS30	Clamping diodes
—	4116	Dynamic memories
—	7805	Logic supply
	7812	RAM power supply
	7905	RAM substrate bias supply

Table 3: *Functions of the various integrated circuits used on the memory board.*

Z80MWRT) are used to trigger the three request flags MCYRQ, MWRT B, and $\overline{RFRQ}$. $\overline{TALK}$ comes true when PHANTOM is false, MADDR is true, and Z80MEMR is true. $\overline{TALK}$ turns on the output bus driver.

Each of the three request flags indicates that some memory cycle is pending, and each is cleared when its cycle is accomplished. MCYRQ demands a memory-access cycle, either read or write. MCYRQ triggers all the incoming-address buffers (labeled Column Buffer and Row Buffer in figure 3; IC17 and IC18 in figure 4, page 322; and IC27 in figure 4, page 321) so that the bus need not remain stable until the end of an access cycle. MWRT B means the pending memory cycle is a write. It triggers the input-data buffer (labeled Write Buffer in figure 3, IC25 in figure 4, page 323) for the same reason. $\overline{RFRQ}$ means it's time to refresh a row in every memory on the board. $\overline{RFRQ}$ may be due to an op-code fetch or the 9-μs timer running out. (A careful examination of the timing of a 4-MHz Z80 PUSH

LOWEST PRICED "PROFESSIONAL" MODEMS

R103J @ 300 BAUD

$159

Retail Value $199. – Save $40.

- Compatible With Any Personal Computer With 232C Interface (such as: TRS-80, Apple, IBM, DEC, etc.)
- 300 BAUD Full Duplex (R103J)
- 1200 BAUD Full Duplex (PC1200)
- Front Panel Light Emitting Diodes (LED's) Monitor: 232C Interface

YOUR CHOICE

- Front Panel Push Buttons Provide Modem Test Plus Convenient Switching Between Talk and Data Modes
- Compatible With your Standard Home Telephone, Both Rotary and Push Button

PC1200 @ 1200 BAUD

$499

Retail Value $695. – Save $196.

- Operates Over All DDD Telephone Lines
- Your Terminal Controls Automatic or Manual Answer
- Automatically Selects Originate or Answer Mode
- Bell 103, 113, and 212 Compatible

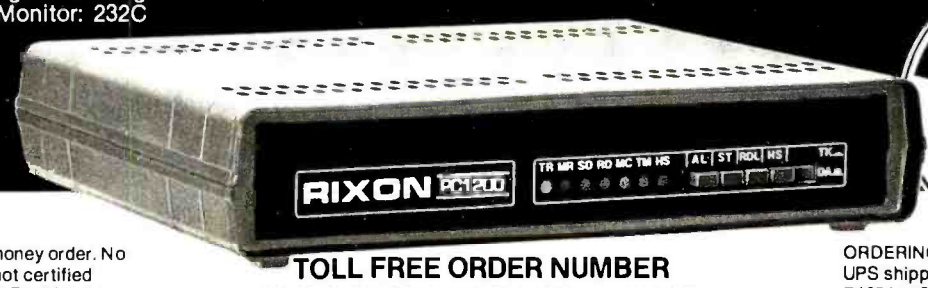

FREE... Minature Plug Telephone Line Cable (A $6.95 Value) If you order by March 31, 1983.

TERMS: Send check or money order. No cash please, if check is not certified shipment will be delayed. For Visa or Master Charge, include Card Number, Expiration Date, Interbank Number, Interbank Initials (if any), and Name of Card Issuer. Sorry, No. COD.

TOLL FREE ORDER NUMBER

800-368-2773 Ext. 358

(In Md. 301-622-2121 Ext. 358)

RIXON INC.

ORDERING INFORMATION: To cover UPS shipping & handling add $5.00 for R103J or $9.00 for PC1200. Include full name, address, & zip code. UPS will not deliver to a P.O. Box Number, local sales tax will be added if shipped to: CA, CO, FL, IL, MD, MA, MI, MN, NJ, NY, NC, PA, SC, TX, VA, or WA.

© RIXON INC., 1982 3042

Please mail your orders to: Rixon Inc., ATT: R103J Offer, 2120 Industrial Parkway, Silver Spring, Maryland 20904

Circle 378 on inquiry card.

www.americanradiohistory.com

WE'RE SMASHING THE PRICES

ON FOURTH DIMENSION SYSTEMS

DISK DRIVES

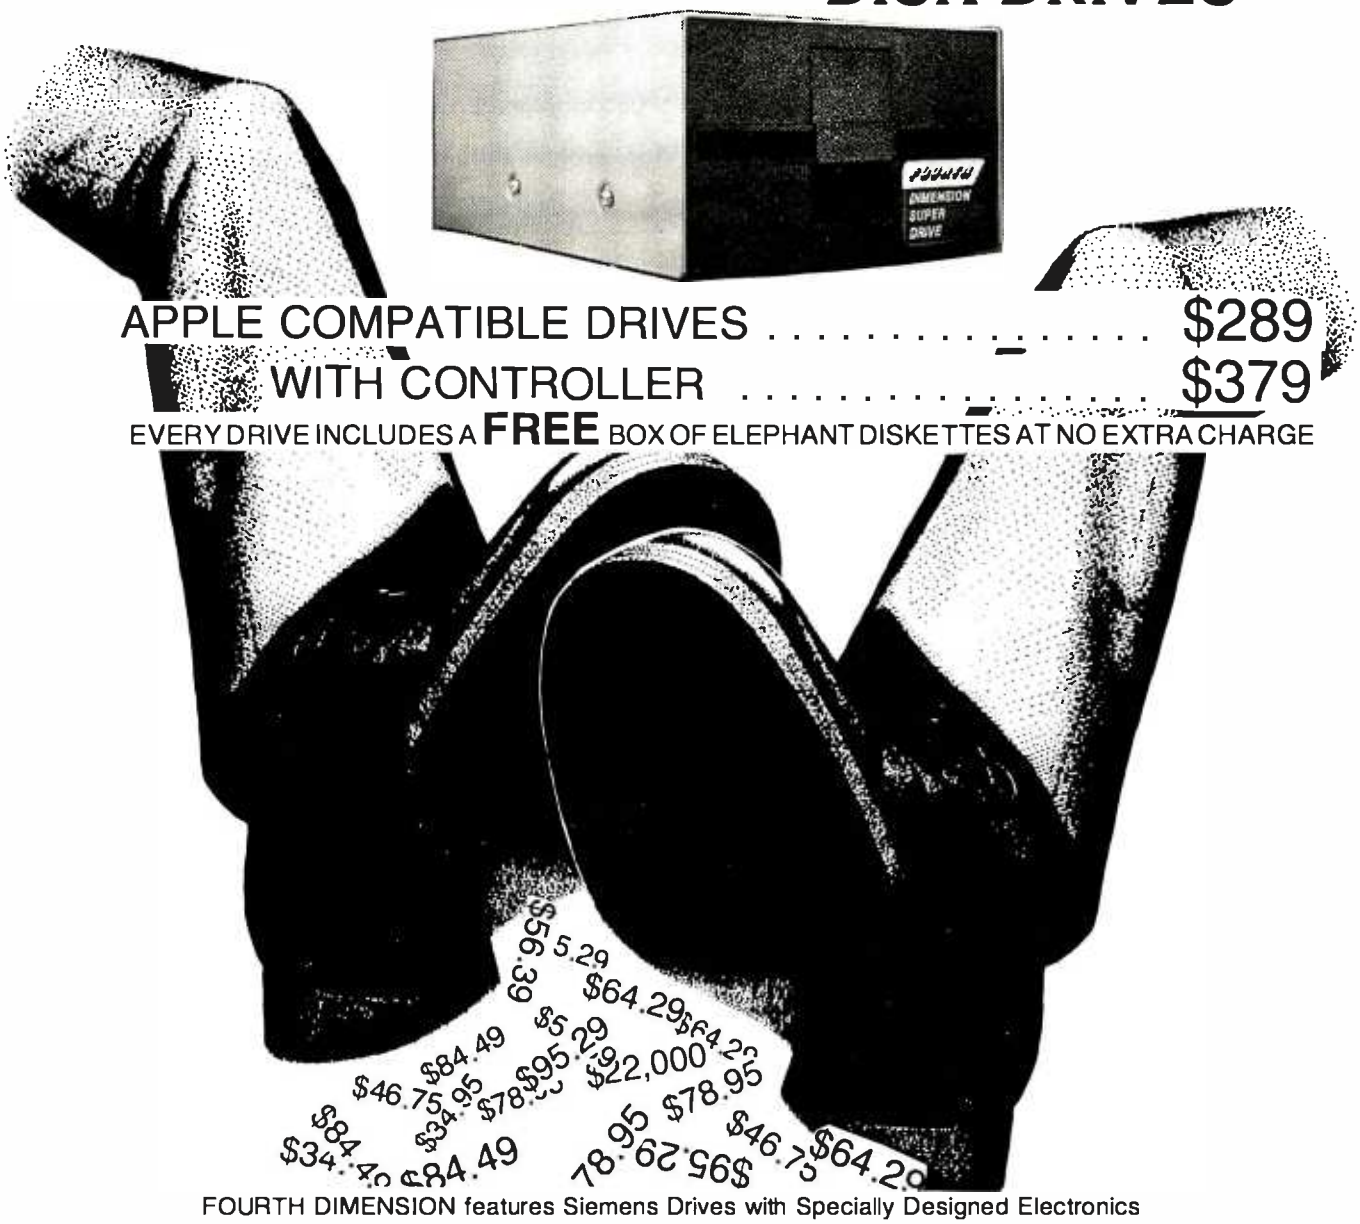

APPLE COMPATIBLE DRIVES $289

WITH CONTROLLER $379

EVERY DRIVE INCLUDES A **FREE** BOX OF ELEPHANT DISKETTES AT NO EXTRA CHARGE

FOURTH DIMENSION features Siemens Drives with Specially Designed Electronics for Stepper Motor Control. The Motor Speed Control is easily accessible through a hole in the bottom of the case. Capacity: 140K, 35 Tracks.

CALL "THE COMPUTER-LINE"

ORDERS AND INFORMATION
(303) 279-2727
(303) 279-2848
1-(800)-525-7877

ORDER INQUIRIES ONLY
(303) 278-8321

COMPUTERLINE, Inc.
1019 8th Street
Golden, CO 80401

COMPUTERLINE OF DENVER:
1136 South Colorado Blvd.
Denver, CO 80222

TERMS: All prices reflect a 2.9% cash discount. All goods acknowledged faulty on receipt by the customer will be repaired or replaced at our discretion. Customers must call for an RMA number before returning any goods. This facilitates our quick attendance to faulty goods. We reserve the right to repair or return to the manufacturer for repair all goods becoming faulty within the specified warranty period. Any goods (hardware or software) returned for restocking are subject to a 10% restocking fee at our discretion. No returns on software. We accept no responsibility for any false claims made by manufacturers. Prices quoted for stock on hand and subject to change without notice. Specialists in APO and international deliveries. Please add 2% (minimum $3.00) for shipping. APO add to all prices 5% for shipping (minimum $5.00). Please allow 10 working days plus mail time (if an order is mailed in for receipt of all UPS delivered goods. All goods (other than APO or international) delivered UPS ground.

Circle 110 on inquiry card.

www.americanradiohistory.com

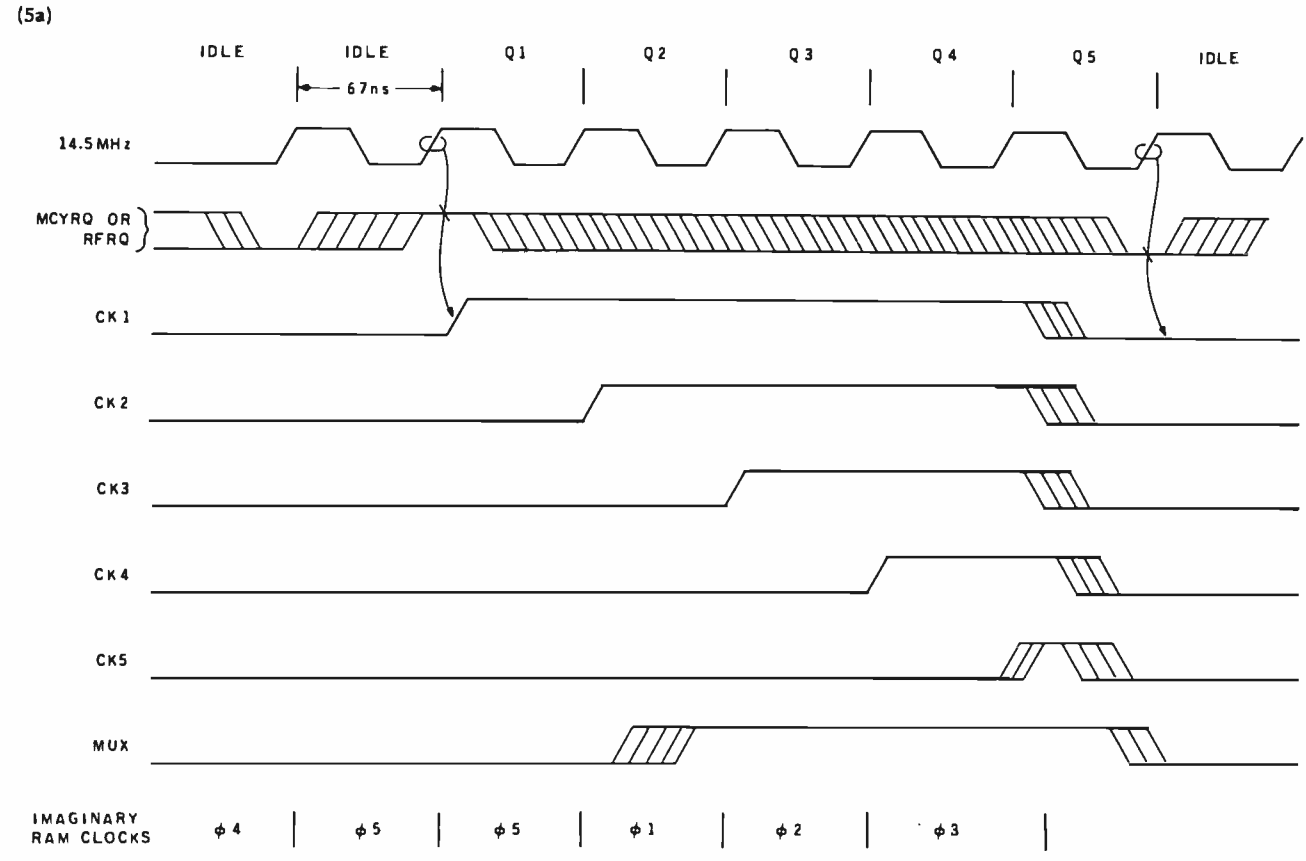

Figures 5a and 5b: *Timing of signals generated on the board, as they relate to the imaginary five-period cycle. In figure 5a, the cycle begins on the leading edge of the 14.5-MHz clock while either MCYRQ (the cycle request signal) or RFRQ (the refresh request signal) are true. The fifth imaginary period is a forced idle period. Figure 5b shows an idealized read cycle.*

instruction will reveal why you *must* latch incoming address and data; in the worst case, the column address disappears from the bus just before the memories are finished sampling it.)

The 9-μs timer (IC6 in figure 4, page 320) starts running when a refresh cycle happens. After 9 μs without another $\overline{\text{RFRQ}}$, it asserts $\overline{\text{TIMEOUT}}$ and sets an $\overline{\text{RFRQ}}$ itself. If there are op-code fetches more often than that, $\overline{\text{TIMEOUT}}$ stays inactive. In case a fast DMA transfer should "lock out" refreshes for a while, a 9-μs interval gives nearly twice as many refreshes as the memories require. It also lets you use a clock as slow as 8 MHz on this board without changing the circuit.

The cycle generator (IC4 of figure 4, page 321) is a shift register that fills with 1s as each cycle progresses (a "half-Johnson counter"). Figures 5a and b show the cycle generator's timing relationships. On every 14.5-MHz clock pulse, it samples ANY REQ and stores a 1 immediately if there's a request. On the fifth clock pulse, IC4 is reset by the 1 as it is shifted to $\overline{\text{CK5}}$, and the generator is ready to cycle again. The connection from $\overline{\text{CK1}}$ to the input of the cycle generator via IC1 ensures that no cycle can be aborted once it starts. $\overline{\text{CK5}}$ stretches the last phase of the cycle a little and gives a rest of at least one clock period between cycles (see figures 5a and b).

When CK1 rises, the cycle in progress may be either memory access or refresh. If the cycle is refresh, RFSH (pin 6 of IC3, figure 4, page 321) is true, and there will be no $\overline{\text{CAS}}$. All four $\overline{\text{RAS}}$ lines (figure 4, page 323) will be active. RFSH is shown in photo 2. Thus, memory accesses have priority if a refresh request and a memory access occur simultaneously.

On the next phase (CK2 rises), the write-status flag $\overline{\text{WR}}$ (see IC10 of figure 4, page 321) is triggered, and it tells the memories whether to read or write. The memories ignore this signal during refreshes because they can't write without $\overline{\text{CAS}}$.

IC11 (figure 4, page 322) counts the rows being refreshed after each refresh cycle. There are three address buffer registers: row (IC18), column (IC17), and refresh row (IC19). IC19 is used only for its three-state outputs, but it simplifies the wiring by matching the output pins of the other registers. The decoder (IC20) selects the address the memories will need next, and its propagation delay (and that of the registers) guarantees the hold time of the row address (i.e., the row address will not begin to change until 25 ns after $\overline{\text{RAS}}$ has fallen). I designed the path to allow for eight address bits to encourage users to switch to the denser 4164 memories later. The lines that end in stars on the schematic are left dangling, for now, but you should mount all the

www.americanradiohistory.com

(5b)

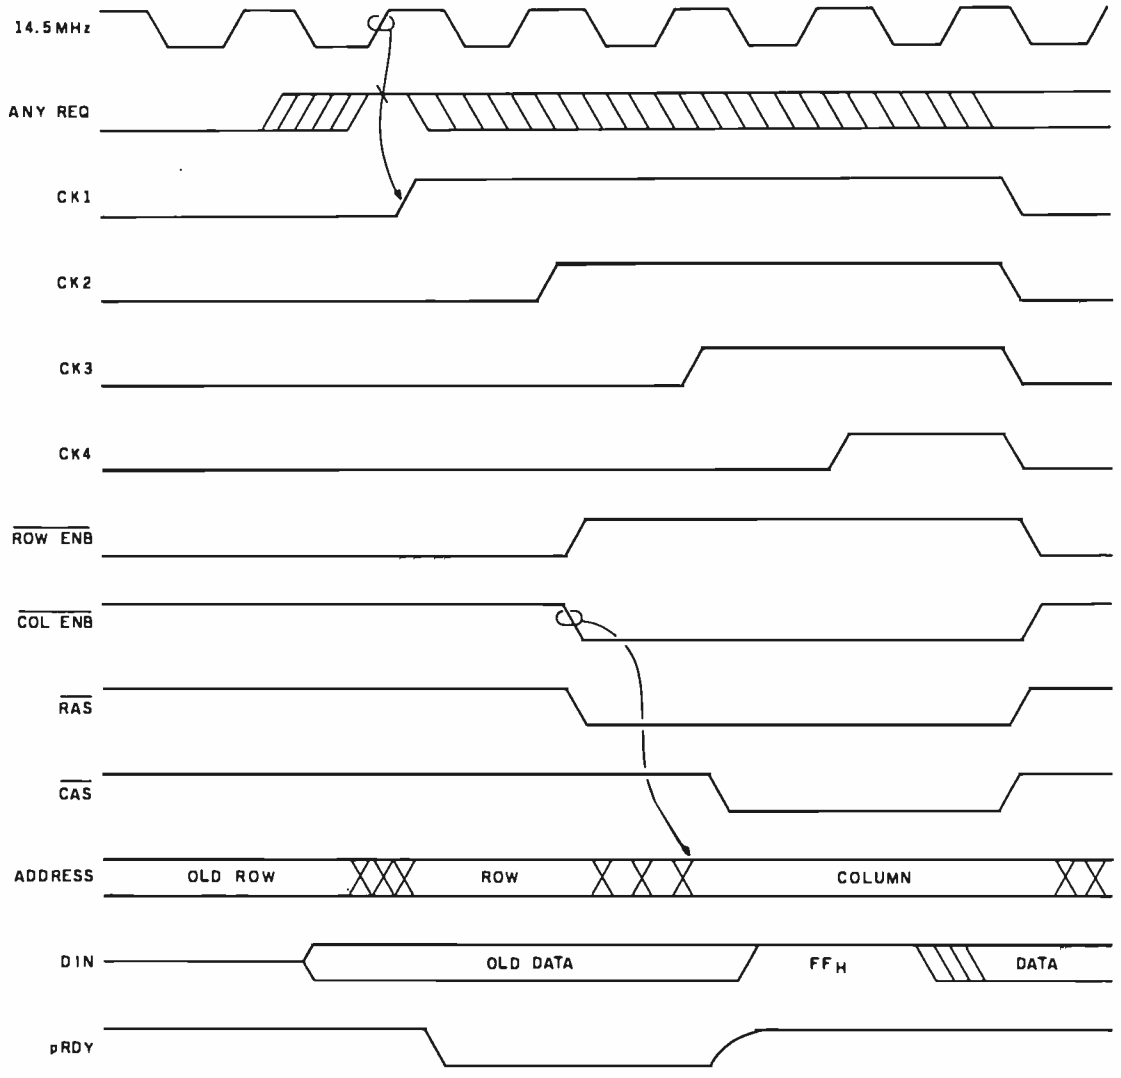

resistors anyway.

Because the bus won't wait once it begins a write, data is latched into the board. A refresh might be in progress when the write begins, and the data would be gone by the time the memories were ready for it if you did not include the latch (IC25 in figure 4, page 323). IC25 also isolates the bus from the long, reflection-prone lines to the memories. One commercial board I've seen omits the input buffer, hooking the memory inputs to the bus with 18 inches of printed-circuit board trace.

Data is latched coming out of the memories, too. The transparent latch, IC24, puts the data on the bus as soon as it's ready and holds it there until $\overline{\text{TALK}}$ goes away. This action makes it possible to read the board with very flexible timing, including push-button front panels, long waits, or very slow bus controllers.

The address strobes, $\overline{\text{RAS0}}$ through $\overline{\text{RAS3}}$ and $\overline{\text{CAS}}$ (see photo 3), are each gated by phases of the crystal-controlled clock. $\overline{\text{RAS}}$ is used in decoding the bank address, but all four banks receive $\overline{\text{RAS}}$ simultaneously during refresh. $\overline{\text{CAS}}$ isn't decoded because it appears only during a memory cycle. The LSTTL gate at the far end of each strobe line is used only for its input diodes, to limit the reflected pulses to a safe level.

The clock (most of IC15, figure 4, page 320) is a ring oscillator. With no crystal installed, a pulse chases itself around the ring at about 22 MHz. The crystal limits the frequency to 14.5 MHz, and the free speed of the ring limits the crystal (or it would try to run at 29 MHz). The ring has no stable logic state, so the oscillator always starts. This circuit gave me more trouble than anything else on the board but less trouble than the other two oscillators I tried first (two inverters and an Intel 8224). Do not substitute smaller capacitors, or you'll get 29 MHz, and your memory probably won't work. The 1K-byte pullup resistor and the fourth inverter improve the waveform at its rising edge, so that IC3 and IC4 (figure 4, page 321) are triggered *simultaneously*, as they must be.

The wait gate, IC21, decodes the various conditions that mean the processor is outrunning the memory. It makes the processor wait if:

1. an op code isn't ready; or
2. an ordinary read isn't almost ready (look very carefully at the refer-

www.americanradiohistory.com

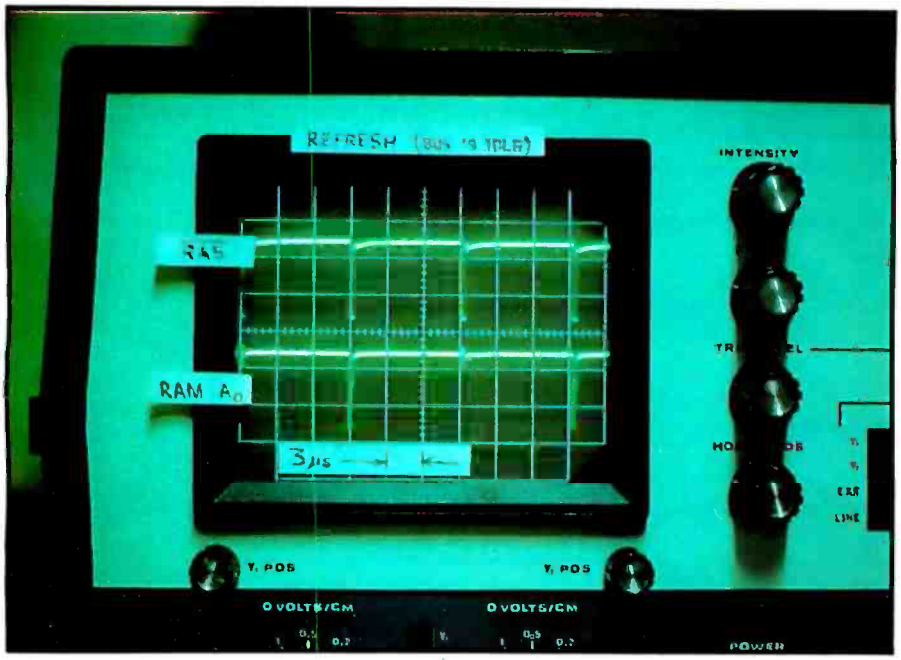

Photo 2: *A demonstration of the refresh timer while the bus is idle. With pRDY grounded, address line 0 is shown alternating as the refresh address is incremented.*

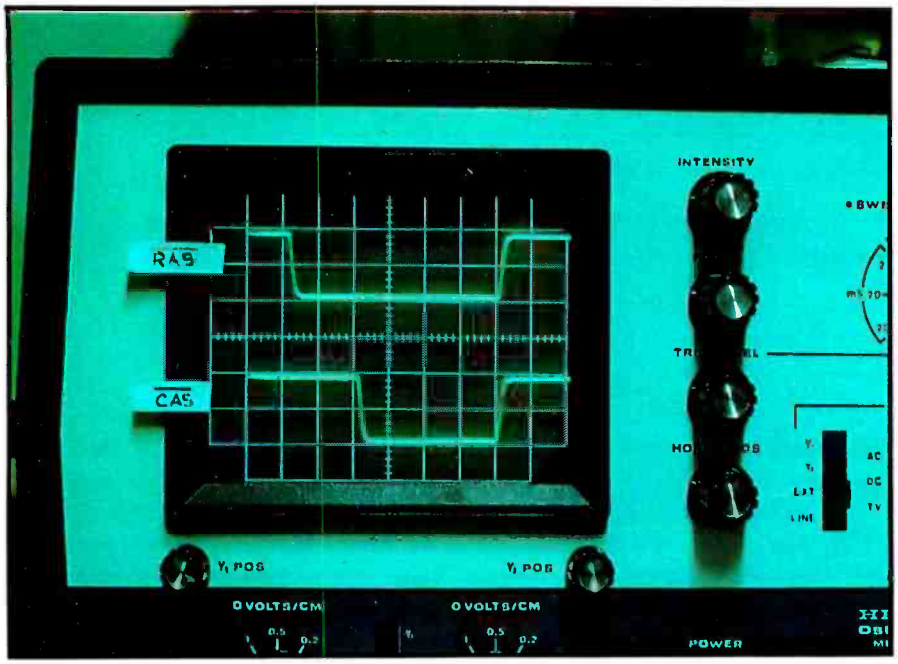

Photo 3: *The multiplexed address strobes. With the memory card's clock set at 4 MHz and the processor running at 2 MHz, $\overline{RAS}$ and $\overline{CAS}$ are clear and well defined (the oscilloscope is being triggered by the rising edge of CK1).*

ences and notice that both versions of the memory board sample pRDY earlier during an ordinary read than during an op-code fetch); or

3. a write is still under way, and the bus begins a read; or
4. the timer runs out, and the processor is looking our way.

Number 4 isn't that important, but it limits the occurrence of the others. The interaction between processor and cycle generator is probabilistic and hard to observe. I'd rather make an extra wait than skip a cycle. If you use Schottky devices everywhere I have specified, you'll very seldom get wait states at 4 MHz.

Next Month

Once the general operation of the board is understood, all that remains is to order the parts and proceed with construction. Of course, the cost advantage of this build-it-yourself project may be completely negated if proper construction techniques are not followed. In the conclusion of this article next month, I will detail the proper building procedures and attempt to smooth out some of the rough spots that experimenters may run into. Remember, if you build the circuit carefully, you will have a dependable memory board that will serve you for years. If you rush, or buy "untested" parts, you may end up with an expensive puzzle, or even fireworks. ■

References

1. Blakeslee, Thomas R. *Digital Design with Standard MSI and LSI: Design Techniques for the Microcomputer Age*, 2nd ed. New York: John Wiley and Sons, 1979.
2. Buchanan, J. E. "Crystal Oscillator Design Eliminates Start-up Problems." *EDN*, February 20, 1978.
3. Malakoff, Larry. "Dynamic Memory: Making an Intelligent Decision." BYTE, February 1981, page 142.
4. Morrow, George, et al. "Standard Specification for S-100 Bus Interface Devices (Proposed IEEE Task 696.1/D2)." *Computer*, July 1979.
5. Mostek Corporation. *Memory Data Book and Designer's Guide*. 1979.
   a) 4116 Specification, page 109.
   b) Application Note, by David Wooten, page 281.
6. NEC Microcomputers Inc. *1980 Data Catalog*. 8080A Specification, page 165.
7. Ramo, Simon, et al. *Fields and Waves in Communications Electronics*. New York: John Wiley and Sons, 1965.
8. Texas Instruments Inc. *The TTL Data Book*. 1976.
9. Zilog Inc. "Z-80 CPU Product Specification." March 1978.

Acknowledgments

Jim Cooley, Ben Slade, Les Newcastle, and Ed Criscuolo tested the new board in their S-100 machines. Thanks to their courage, I can claim the card works in systems with SD Sales' 2-MHz computers and in the Netronics Explorer 85. It also works in my system with a Z80 running anywhere between 125 kHz and 4 MHz.

The good people of Litton Systems' Amecom Division, especially Jay Lancaster and Jim Cooley, put up with me while they taught me the basics of digital electronics. Jay helped with the photography. I thank you all.

Circle 466 on inquiry card. ⟶

www.americanradiohistory.com

INTRODUCING THE NEWEST CREATION FROM XCOMP:

THE TOASTER. TWO REMOVABLE 3.9", 5 MEGABYTE HARD DISK CARTRIDGES MAKES IT THE GREATEST THING SINCE SLICED BREAD!

Now you can start the day by knowing you can get everything you've always dreamed of. In fact, it's the answer everyone's been looking for!

The Toaster, from XCOMP.

The Toaster is a Hard Disk Subsystem with a twist. It contains **TWO** 3.9", 5 Megabyte Hard Disk Cartridges that are **REMOVABLE!**

The Toaster provides unlimited storage and convenient back-up with a full **5 Megabytes** per cartridge...**10Megabytes** per application! In addition to XCOMP's quality, reliability and industry leadership, you'll be benefiting from the ultra simplicity of a floppy and the fantastic speed of a hard disk.

And what about security? What can be more secure than being able to pull out your cartridge and take it home with you?

Even though the Toaster is revolutionary, XCOMP also offers 16-MB Fixed, 5-MB Removable and 8 or 16 Fixed Hard Disk Subsystems. We consider them the best in the industry. **ALL** XCOMP products attach to the Apple II and III, IBM-PC, NEC PC8000, OSBORN, KAYPRO and other popular single-board computers.

The Toaster is just one of the many ideas coming from the people at XCOMP today.

Tomorrow, who knows what may pop up.

31 SALES OFFICES TO SERVE YOU: Richard Dean & Assoc., Woburn, MA (617) 933-8435 Paston-Hunter Company, Inc., Syracuse, NY, (315) 437-2992 **EASTERN SEABOARD:** TMC Sales Corp., Fort Lee, NJ, (201) 944-8340/ (212) 563-5185; AB&T Sales Corp., King of Prussia, PA (215) 783-7011 **SOUTHEAST:** Cartwright & Bean Atlanta, GA (404) 233-2939 **MIDEAST:** J. Malcom Flora, Inc., Plymouth, MI (313) 453-4296 Incom Marketing, Inc., Columbus, OH (614) 445-8431; New Horizons Electronic Marketing, Bannockburn, ILL (312) 234-5911 **SOUTHWEST:** J.Y. Schoomaker Co., Inc., Dallas, TX (214) 349-1650 **ROCKY MOUNTAINS:** B&B Electronics, Inc., Englewood, CO (303) 773-6700 **WESTCOAST:** Berman-Graveley Co., Inc., Costa Mesa, CA (714) 549-2122 Moulthrop Sales, Inc., San Francisco, CA (415) 846-0550; Earl & Brown, Portland, OR (503) 245-2283. **MINNESOTA:** Please call XCOMP. **KANSAS:** Please call XCOMP.

$2795.

Special Offer: With every Toaster sold, you'll receive TWO Cartridges FREE! That's a $150. value! Order now!

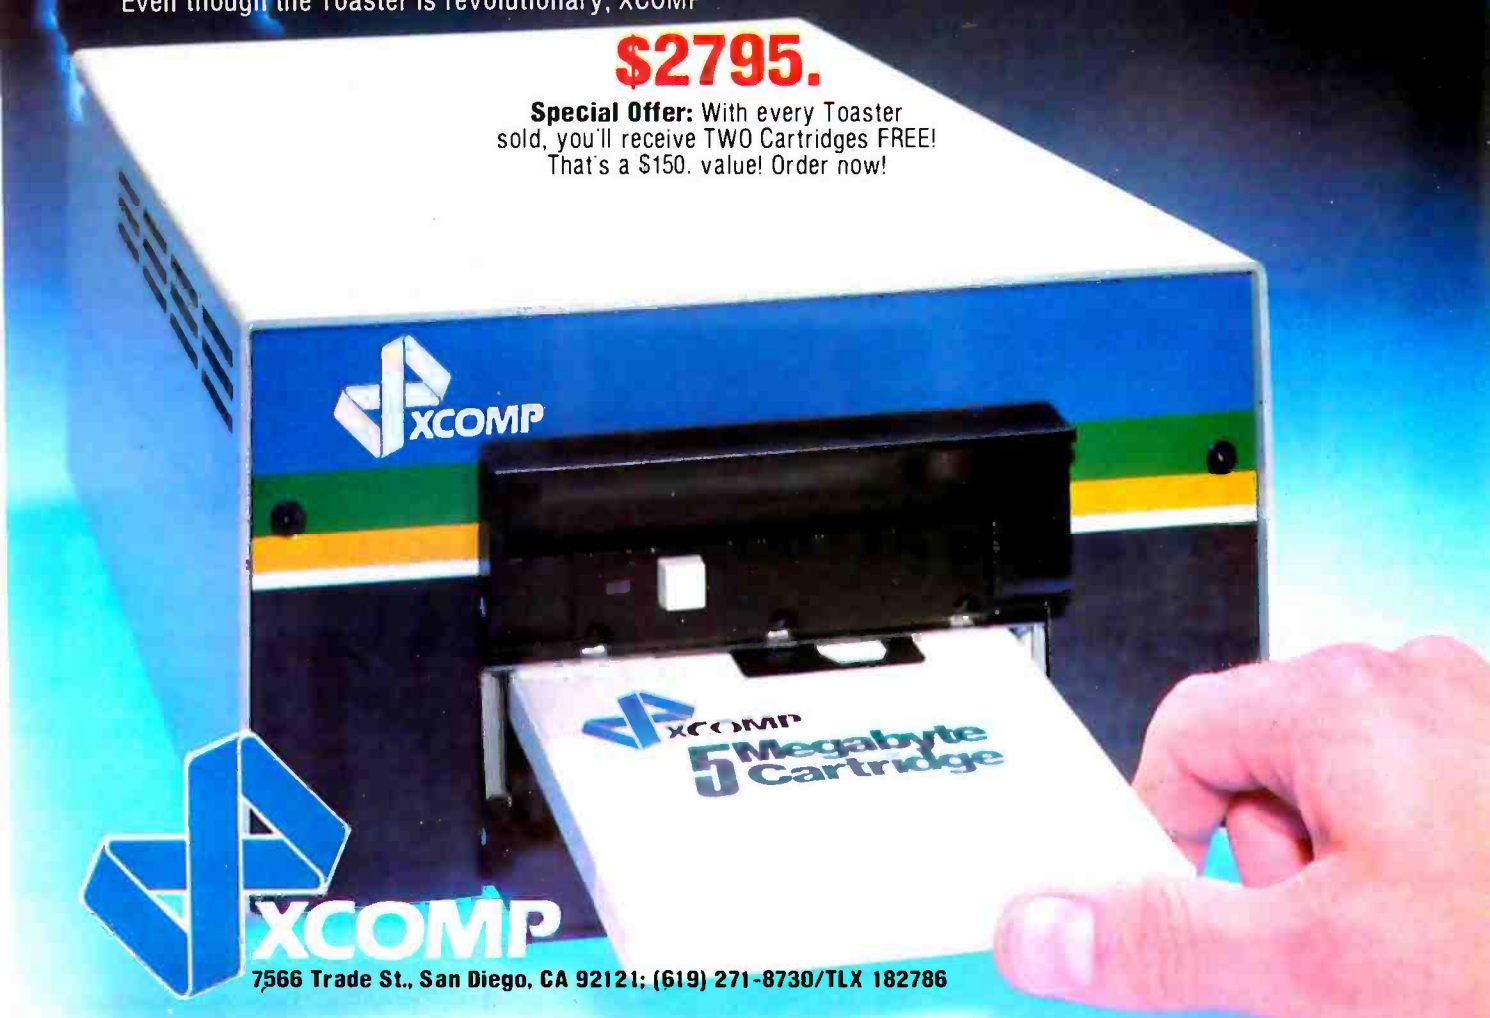

XCOMP

7566 Trade St., San Diego, CA 92121; (619) 271-8730/TLX 182786

www.americanradiohistory.com

FROM THE CREATORS OF THE DATA DRIVE®
COMES APPLETTE 1® AND APPLETTE 2®

SLIMLINE DRIVES

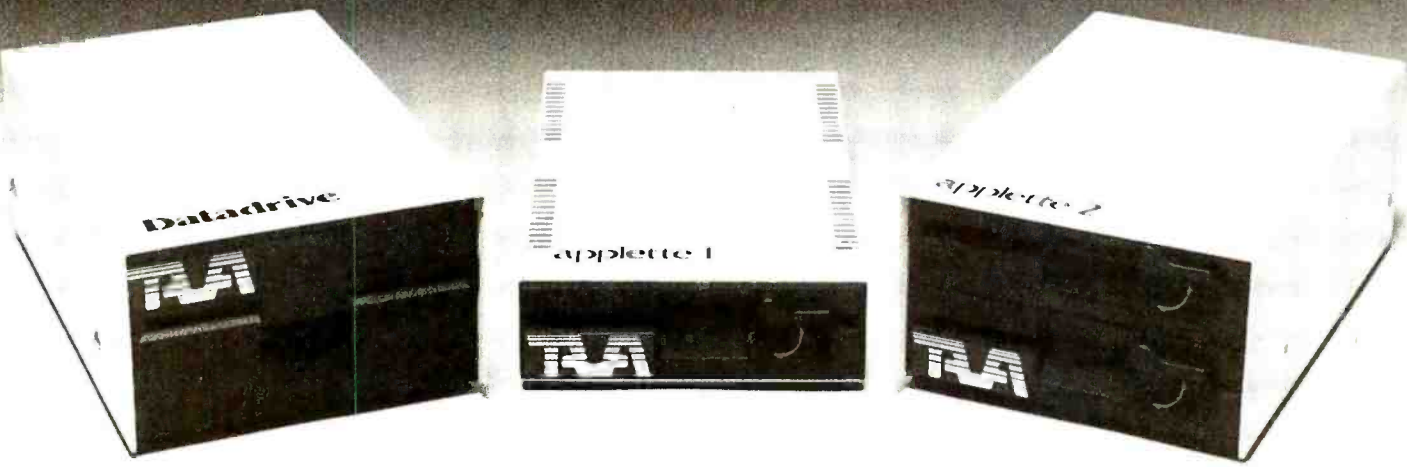

Available At CompuShack Stores

Applette 1® and Applette 2® are 100% Apple II compatible. Halftracking, DOS, PASCAL, and CP/M®. 300% faster track to track speed with 15% greater storage capacity on a 40 track mode with enhancer diskette. TEAC® mechanism and read/write electronics. Direct shaft drive, metal band positioner, photo coupler write-protected sensor. 10,000 lifetime hours, and more. **One year warranty on all parts and labor.**

Headquarters Telex: 18-3511

TAVA CORP.

Answer Back CSMA

(714) 730-6772

*DATA DRIVE, APPLETTE 1, APPLETTE 2, and TRUMP CARD are registered trademarks of TAVA Corporation, respectively

*TEAC is a registered trademark of TEAC Corp.

* CP/M is a registered trademark of Digital Research, Inc.

Circle 359 on inquiry card.

www.americanradiohistory.com

A Peek into the IBM PC

Expanding the Printer Character Set

An assembly-language program enables an Epson printer to display all 256 characters used by the IBM Personal Computer.

Tim Field
95 South El Monte
Los Altos, CA 94022

The IBM Personal Computer is a top-notch product that has attracted a great deal of enthusiastic support, as evidenced by the large number of hardware and software products that have been developed for it. The basic system already seems to have set the standard by which all new personal and small-business machines are being compared.

But while the Personal Computer was being designed, IBM was faced with numerous hardware and software trade-offs. IBM wanted to get the system on the market as quickly as possible, and some desirable features were omitted in order to speed up the development cycle. Thankfully, IBM put a great deal of emphasis on making the computer as flexible as possible and then published all the technical reference material about the computer that anyone could desire.

The documentation and flexibility allow the system to be easily adapted to many different uses. Also, many of the faults found by critics of the system can be easily fixed. It is one of these faults that I set out to correct.

One of the trade-offs that IBM made in speeding the Personal Computer to the marketplace was in deciding not to manufacture its own printer. Instead, IBM made an arrangement with Epson to use the MX-80 dot-matrix printer and slap on the IBM logo. By doing this, IBM saved a great deal of effort and began with a proven product.

The Epson MX-80 is a high-quality, inexpensive, dot-matrix printer with a plethora of features. The one feature that it does not have, however, is the capability to print the full IBM character set. Both the monochrome and color graphics-display options for the IBM PC provide the user with 256 characters to display. Within that set are many characters that are not normally available and that are useful for authors, mathematicians, scientists, and so on. But the Epson (IBM) printer can provide a hard-copy output of only 96 of these 256 characters.

In this article, I present a program called PR-256 that will correct this deficiency. This program requires an Epson MX-100 printer, or an Epson MX-80 with the Graftrax graphics option, to run properly. The IBM printer, because it is almost identical to the MX-80, can also be equipped with the Graftrax chip. Given one of these printers and PR-256, all 256 characters of the IBM PC are available to be printed out (see listing 1).

Unfortunately, Epson's new Graftrax-Plus graphics chip, which allows some additional capabilities including italic typefonts, is not compatible with PR-256 as it is now written. A revised version of PR-256, however, that will be compatible with this new chip should be available by the time this article appears in print. This new program will work with printers having either graphics chip. The present program listed in this article, however, will work only with the older Graftrax chip.

Overview of PR-256

PR-256 is designed to operate as if the user had installed extra hardware in the printer. But no additional hardware other than the Graftrax graphics capability is necessary! Once the user has set up the program as described in this article, PR-256 will automatically

About the Author

Tim Field has just completed his master's degree in computer science at Purdue University. His experience also includes a few years working at DEC. He is presently at work on a series of articles about the IBM PC.

www.americanradiohistory.com

Listing 1: *A printout of the full IBM Personal Computer character set as produced by the program PR-256.*

ASCII VALUE	CHARACTER	ASCII VALUE	CHARACTER	ASCII VALUE	CHARACTER	ASCII VALUE	CHARACTER
0		64	@	128	Ç	192	└
1	☺	65	A	129	ü	193	┴
2	☻	66	B	130	é	194	┬
3	♥	67	C	131	â	195	├
4	♦	68	D	132	ä	196	─
5	♣	69	E	133	à	197	┼
6	♠	70	F	134	å	198	╞
7	•	71	G	135	ç	199	╟
8	◘	72	H	136	ê	200	╚
9	○	73	I	137	ë	201	╔
10	◙	74	J	138	è	202	╩
11	♂	75	K	139	ï	203	╦
12	♀	76	L	140	î	204	╠
13	♪	77	M	141	ì	205	═
14	♫	78	N	142	Ä	206	╬
15	☼	79	O	143	Å	207	╧
16	►	80	P	144	É	208	╨
17	◄	81	Q	145	æ	209	╤
18	↕	82	R	146	Æ	210	╥
19	‼	83	S	147	ô	211	╙
20	¶	84	T	148	ö	212	╘
21	§	85	U	149	ò	213	╒
22	▬	86	V	150	û	214	╓
23	↨	87	W	151	ù	215	╫
24	↑	88	X	152	ÿ	216	╪
25	↓	89	Y	153	Ö	217	┘
26	→	90	Z	154	Ü	218	┌
27	←	91	[	155	¢	219	█
28	∟	92	\	156	£	220	▄
29	↔	93	]	157	¥	221	▌
30	▲	94	^	158	₧	222	▐
31	▼	95		159	ƒ	223	▀
32		96	`	160	á	224	α
33	!	97	a	161	í	225	ß
34	"	98	b	162	ó	226	Γ
35	#	99	c	163	ú	227	π
36	$	100	d	164	ñ	228	Σ
37	%	101	e	165	Ñ	229	σ
38	&	102	f	166	ª	230	µ
39	'	103	g	167	º	231	τ
40	(	104	h	168	¿	232	Φ
41	)	105	i	169	⌐	233	Θ
42	*	106	j	170	¬	234	Ω
43	+	107	k	171	½	235	δ
44	,	108	l	172	¼	236	∞
45	-	109	m	173	¡	237	ø
46	.	110	n	174	«	238	ε
47	/	111	o	175	»	239	∩
48	0	112	p	176	▒	240	≡
49	1	113	q	177	▓	241	±
50	2	114	r	178	▓	242	≥
51	3	115	s	179	│	243	≤
52	4	116	t	180	┤	244	⌠
53	5	117	u	181	╡	245	⌡
54	6	118	v	182	╢	246	÷
55	7	119	w	183	╖	247	≈
56	8	120	x	184	╕	248	°
57	9	121	y	185	╣	249	∙
58	:	122	z	186	║	250	·
59	;	123	{	187	╗	251	√
60	<	124	|	188	╝	252	ⁿ
61	=	125	}	189	╜	253	²
62	>	126	~	190	╛	254	■
63	?	127	⌂	191	┐	255	

load into the IBM system whenever power is turned on and will reside in memory until power is turned off.

Whenever a user program sends any characters to the Epson to be printed, PR-256 will wake up and cause the appropriate characters to be printed out. Whether you are running a BASIC program, a Pascal program, an assembly-language program, or even executing a Print Screen function, PR-256 will automatically step in and cause the proper characters to be printed. PR-256 operates with a minimum of user intervention. Generally, once it has been set up as described below, the user need not even know that it is there.

PR-256 is an assembly-language program requiring the IBM Macro Assembler to assemble and link. It requires just over 2K bytes of RAM (random-access read/write memory). It will load up in the lowest available area of memory automatically and will not affect DOS (disk operating system) operation. If your IBM has 64K bytes or less of RAM, PR-256 will take away from the amount of memory available to BASIC. But if you have more than 64K bytes, you will rarely (if ever) miss the memory occupied by PR-256. In that case, PR-256 will probably be stored outside of the 64K bytes that are used for BASIC.

For the remainder of this article I will be talking about PR-256 in detail. In order to understand how the program works within the IBM system, I must first discuss three different areas relating to the program interface. The first topic is the interrupt structure of the 8088 microprocessor and how the IBM BIOS (basic input/output system) software uses this structure. Second, we will look at interfacing with DOS to set up PR-256. Finally, we will deal with the MX-100. (I will use the term MX-100 throughout the article to signify both the Epson MX-100 and either the IBM printer or the MX-80 with the graphics option.)

After covering these peripheral topics (no pun intended), I shall delve into the inner workings of PR-256.

8088 Interrupt Structure

The interrupt structure of the 8088 microprocessor is really the tie that binds the IBM system together. It is analogous to the human spinal column in its function. Essentially, the system of hardware and software interrupts provides the mechanisms that are necessary to coordinate the various operations of the computer.

An interrupt is an input into the processor that causes the current sequence of operations to be momentarily broken and some special action to be taken. Generally, these have been hardware mechanisms that simply allow the execution flow of a processor to be temporarily "interrupted" so that some pressing matter can be attended to by the processor. Interrupts for microprocessors have been used primarily by hardware designers. An interrupt was signaled by "pulling" a pin on the microprocessor chip low (or high). This allowed various off-chip functions to be monitored and controlled by the processor.

Intel designed into the 8088 a very flexible interrupt structure that the IBM computer puts to good use. Intel gave us 256 interrupts with which to work. And these are accessible through both hardware and software. Intel set aside some 32 of the 256 interrupts for predefined use (e.g., "Divide by Zero," "Nonmaskable Interrupt," etc.). But the remaining 224 interrupts are available to the system designer for software use.

To invoke these software interrupts, the 8088 has a special INT instruction in its repertoire. In

www.americanradiohistory.com

FREE SHIPPING

IBM® Personal Computer Products

Davong	5 MB Hard Disk System	$1525.00
	12 MB Hard Disk System	2099.00
	IBM PC-2 Drive System	**$CALL**

Quadram - Quadboard with Parallel

Port, Serial Port, Clock/Calendar, Expandable to 256 K.

64 K on brd.	$425.00
128 K on brd.	539.00
192 K on brd.	629.00
256 K on brd.	719.00

Quadram Memory Expansion

192 K Maximum

64 K on brd.	$230.00
128 K on brd.	350.00
192 K on brd.	490.00

Amdek Monitors

Mod. 300 Phosphor	$150.00
Composite Color III	345.00
IBM RGB Compatible Color II	650.00
Color I	300.00

IBM/TRS 80 Disk Drives/Cabinets

TM 100-1 Single 40 Track Drive	$189.00
with Cabinet & P/S	235.00
TM 100-2 Double 40 Track Drive	289.00
TM 100-3 Single 80 Track Drive	289.00
TM 100-4 Double 80 Track Drive	379.00
8" Dual Slim Line Power Supply & Cabinet	225.00
5¼ External Power Supply & Cabinet	49.00

Apple II® Computer Products

Apple Compatible Controller Card	$79.95
Apple Compatible Disk Drive w/Cabinet & Cable	265.00
w/Controller	325.00
16 K Ram Card	60.00
Printer/Graphics Interface	99.95
Davong 5 MB Hard Disk System	1525.00
Davong 12 MB Hard Disk System	2099.00
Apple Compatible Joysticks	42.95

Epson/Smith-Corona Printers

MX80	$425.00
MX80 F/T	470.00
MX100	640.00
Smith Corona TP-1 Letter Quality Daisy Wheel	565.00
TRS 80 / IBM Parallel Printer Cable (with purchase of printer)	20.00
STAR MICRONICS GEMINI 10	399.00
GEMINI 15	499.00

Our TRS 80® Mod III

48 K; 2 Tandon 5¼ Disk Drives w/ RS 232.. **$1700.00**

Memory & Media

IBM 64 K Upgrade Kit (9-4164)	$79.95
16 K Upgrade Kit (4116)	12.95
Maxell Diskettes	
MD1 - S/S - D/D	$36.00/Box of 10
MD2 - D/S - D/D	46.00/Box of 10
Commodore VIC-64	**$Call**

VISA, MASTERCARD ($100 Min.. Add 2%)
Or Certified Check
90 Day Warranty (Parts & Labor)
TRS 80 is a Registered Trademark, Tandy Corp.
Prices Subject to Change Without Notice

DATA MAIL

1-(800) 635-5555

P.O. BOX 818. RESEDA. CA 91335

FREE SHIPPING IN CONTINENTAL U.S.
(TRS 80 MOD III EXCEPTED)

(213) 993-4804
(In Calif.)

Circle 217 on inquiry card.

SA2 ROBOT

$1495

The SA2 is a robot developed for the educational market, and has been designed to meet a requirement for a robot which will emulate, in behaviour and physical attributes, larger industrial robots.
The arm can access 360°, with a reach of 18 inches and a maximum lift of ½lb.

Circle 218 on inquiry card.

The Syntheasy

A low cost speech unit complete with Votrax speech output chip, unlimited vocabulary, power supply, speaker and case, all for only -

$149.95

DEALER INQUIRIES INVITED
For further information contact

INTELLIGENT ARTEFACTS LTD.

19205 Parthenia St., Suite H
Northridge, CA 91324 Tel (213) 993-4803

www.americanradiohistory.com

assembly-level code, this instruction is followed by a 1-byte *interrupt value*. The value of that byte determines which of 256 interrupts the processor should invoke.

In order for these interrupts to be used or *serviced*, the user must provide an interrupt-service routine for each of the possible interrupts that may occur. When the 8088 processes an INT call, its hardware looks at the second byte (with the interrupt value in it) and determines where the appropriate interrupt-handling routine is to be found. To accomplish this, Intel has reserved the memory locations from 0 to 1023 for interrupt use. This area of memory is called the *interrupt vector table*.

These 1024 bytes of memory are partitioned off into 4 bytes per interrupt type (i.e., 256 interrupt types × 4 = 1024 bytes). The 8088 hardware takes the interrupt value, multiplies it by 4, and accesses the 4-byte area reserved for this interrupt. In these 4 bytes, the 8088 expects to find the address of the appropriate interrupt-service routine.

The address is stored in these 4 bytes in standard 8088 format. That is, the first 2 bytes of the 4-byte section must contain the program-counter address (IP register) for the interrupt-service routine, and the second 2 bytes must hold the new Code Segment register (CS register) address. From these two values, the 20-bit service-routine address is determined and processor execution continues at that location.

All this work is done automatically by the 8088 hardware. Therefore, if you have previously set up the table of interrupt vectors (the 0 to 1023 bytes containing the service-routine addresses) and you execute an INT instruction, the next instruction that will occur is at the start of the service routine. This call is very similar to a normal subroutine call in that the CS and IP registers are saved on the system stack at the time of the INT call. In addition, for interrupts, the Flag register is also saved on the stack. After the interrupt routine has executed, an IRET (Interrupt Return) command restores the proper IP, CS, and Flag registers, and returns control to the instruction following the INT call.

At this point you are probably saying, "So what! What do I care about all of this?" The vital point is that the designers of the IBM system made extensive use of this setup. Virtually all interaction between processes in the IBM are performed via interrupt calls.

When BASIC executes a FILES instruction to get a listing of the system disk, it sets up certain parameters in the 8088 internal registers and issues an appropriate interrupt to perform the requested function. Likewise, when DOS is requested to list the directory of a disk, it executes the same interrupt request as BASIC did. In either case, when the interrupt returns, the directory of the disk has been read and printed to the screen.

IBM provides the assembly-language programmer many utilities through the use of the interrupt structure. In its *Technical Reference Manual*, IBM states that "access to the BIOS function is through the 8088 software interrupts. Each BIOS entry point is available through its own interrupt, which can be found in the (supplied) interrupt vector listing."

The BIOS routines are basically a group of utilities available to the user. Through BIOS, you can perform disk, cassette, video, keyboard, printer, and communications I/O operations in a standardized manner. Other system services available include time-of-day and memory-size determination. IBM states, "the goal is to provide an operational interface to the system and relieve the programmer from concern over hardware device characteristics."

The extensive use of the interrupt structure gives us users of the IBM system another big benefit in addition to easy access to various utilities. Whereas the actual BIOS code resides in ROM (read-only memory), the interrupt vector table (remember, the memory locations 0 to 1023 reserved for interrupt addresses) is in RAM. These addresses are initialized by the IBM bootstrap routine on each system reset or power-on. This means that the user can change the interrupt-service addresses stored in this table after the system initialization process has finished.

How can we put this knowledge to good use? Well, there are many possibilities. For example, suppose that we want to read and store data to a cassette using a different format than that defined by IBM. (Perhaps we would like to be able to read a format used by some other system.)

The format is determined in software, and because all processes that access the cassette will use the CASSETTE_IO routine supplied in the BIOS, we simply need to overlay or replace IBM's routine with one of our own. As we have just seen, replacing the address in the interrupt vector table of a BIOS routine with the address of our own routine is effectively the same as replacing the whole routine with our own.

In order to accomplish this, we must do several things. First, we must determine the input and output parameters specified in IBM's BIOS cassette routine. In its *Technical Reference Manual*, IBM provides a complete listing (with excellent comments) of the 8K-byte BIOS.

Looking over the BIOS listing for the CASSETTE_IO routine, we can set up the appropriate interface with all calling routines. We can then rewrite the BIOS routine, making sure that all parameter inputs and outputs are the same as for the IBM version. We can then load our routine into RAM, change the interrupt-vector-table entry for the cassette routine so that it addresses our routine, and tell DOS to keep our program in RAM. From then on, as long as the system is not reset, any call from BASIC to save data or programs to cassette, or read from cassette, goes through our routine rather than IBM's. We have managed to replace the ROM version with our own.

The preceding example is exactly the method used by PR-256 to expand the character set on the MX-100 to the full 256 characters defined by the IBM computer. Whenever the IBM is powered on or reset, the program is automatically loaded into RAM and the BIOS PRINTER_IO routine is virtually overlaid by changing the

Text continued on page 338
www.americanradiohistory.com

TIME-PROVEN PERFORMANCE

While new printers with impressive specifications are introduced on an almost daily basis, only time will tell the true quality of the product. Over the past 2 years our customers have continued to buy the DS180 printer, not only because of its impressive performance and competitive price, but also because of our outstanding track record for product reliability and customer support.

We have continually improved on the performance of the DS180 by incorporating such enhancements as dot addressable graphics, 6 user-selectable print sizes and a 2000 character buffer. These features coupled with 180 cps printing, parallel and serial interfaces, adjustable tractor feed and over 40 other programmable features, make the DS180 one of the most versatile matrix printers available today.

Before you select your next printer, why not take a look at a time-proven performer—the Datasouth DS180.

The DS180 printer is available nationwide through our network of sales/service distributors.

Circle 140 on inquiry card.

datasouth computer corporation

P.O. Box 240947 • Charlotte, NC 28224 • 704/523-8500
Telex: 6843018 DASOU UW

www.americanradiohistory.com

Introducing

GENIE™

5-10-15-20

Megabyte 5.25" GENIE Winchester Drives

I.B.M. • APPLE II PLUS • RADIO SHACK

5 MEGABYTES
$2295.00

10 MEGABYTES
$2595.00

15 MEGABYTES
$2895.00

20 MEGABYTES
$3195.00

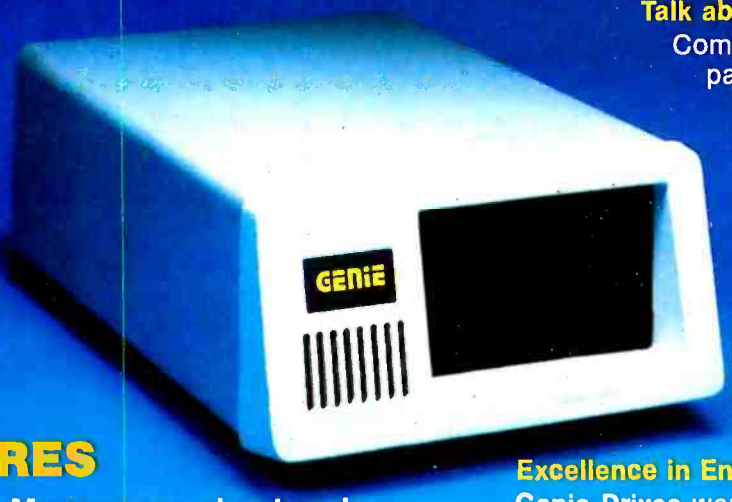

Talk about user friendly...

Comprehensive system utilities package.

Allows eight-character names to be assigned to virtual volumes.

User can back-up to either our **5+5™** removable Cartridge Drive or to diskettes.

Mix & match different system file types on the same disk.

System status screen messages.

Up to 16 volumes on-line at a time.

FEATURES

- Precision Manganese-zinc heads
- Average access time 77 ms.
- File sizes 5-20 megabytes
- Power-on self test
- Built-in error detection and correction
- System expandable to eight drives
- Comes complete with all necessary software and hardware
- No preventative maintenance required
- Built-in fan
- Operates 110/220 VAC 50-60 Hz
- One year warranty

Excellence in Engineering

Genie Drives were built with the user in mind. A design backed by many years of experience, the Genie Drive is everything a user ever wanted in a hard disk. We offer the **ultimate** in hard disk mass storage systems that money can buy.

IBM	APPLE II PLUS	RADIO SHACK
• *Supports IBM-DOS, CP/M-86, PASCAL*	• *Supports DOS 3.3, CP/M, and PASCAL*	*available soon*
• Ultra High Speed DMA data transfers • Only uses one slot in your IBM-PC • Allows you to run with up to four floppy disk drives	• Boot from Hard Disk • Can assign Hard Disk volume to any slot or drive number in the system	S-100 *available soon*

*Manufacturer's suggested retail price. Includes all required components.
IBM DOS Personal Computer is a registered trademark of IBM Corporation.
Apple is a registered trademark of Apple Computer, Inc.
Radio Shack is a registered trademark of Tandy Corporation.
CP/M and CP/M-86 are registered trademarks of Digital Research.

Available at your local computer dealer

GENIE COMPUTER CORPORATION

31125 Via Colinas #908 • Westlake Village, CA 91362 • (213) 991-6210

www.americanradiohistory.com

Introducing

GENIE™ 5+5

5.25″ Removable GENIE Winchester Cartridge Drive

IBM • APPLE II PLUS • RADIO SHACK • S-100

The Genie Cartridge Drive is a revolutionary new 10 Megabyte Hard Disk Drive that includes a 5 Megabyte removable Winchester catridge. The cartridge Drive system simply plugs into your computer, and includes all necessary software and hardware. Genie Drives are compatible with most popular software, and each cartridge replaces over 30 double-density floppy disks.

Removable Cartridge. Imagine, 5 Megabytes in the palm of your hand. These small **Winchester cartridges** are only .75 inches thick and 5.50 inches square. The disk itself is completely sealed from the outside and all its hazards by a sliding door that opens only once the cartridge is firmly seated inside the drive. Long term availability of this cartridge is assured by its adoption by several well known manufacturers including **Dysan** and **Memorex,** the world leaders in computer mass storage media.

FEATURES

- 10 Megabytes of on-line storage.
- File sizes to 5 Megabytes.
- Power-on self-test.
- Easy back-ups in minutes.
- System expandable to eight drives.
- Built-in error detection and correction.
- No preventative maintenance required.
- Comes complete with all necessary software and hardware.
- MTBF 8000 Hours.
- Built-in fan.
- Operates 110/220 VAC 50-60 Hz.
- One year limited warranty.

Talk about user friendly • • •

Comprehensive system utilities package.
Allows eight-character names to be assigned to virtual volumes.
User Can back-up to any Genie REMOVABLE Cartridge Drive, or to diskettes. Mix & Match different system file types on the same disk.
System status screen messages. Up to 16 volumes on-line at a time.

Available at your local computer dealer

Only **$3995.00***

Manufacturer's suggested retail price. Includes all required components.
Concurrent CP/M-86 is a registered trade mark of Digital Research.
IBM Personal Computer is a registered trademark of IBM Corporation.
Apple is a registered trademark of Apple Computer, Inc.
Radio Shack is a registered trademark of Tandy Corporation.
Dysan is a registered trademark of Dysan Corp.

GENIE COMPUTER CORPORATION

31125 Via Colinas #908 • Westlake Village, CA 91362 • (213) 991-6210

Circle 188 on inquiry card.

www.americanradiohistory.com

interrupt-vector-table address to address the new program. Because all output to the printer will probably be routed through the BIOS PRINTER_IO routine, the new program has full control over each character that is sent to be printed.

DOS Notes

In this section, I will discuss some basic principles of DOS that we will need to use in order for PR-256 to work correctly. DOS, the disk operating system for the IBM computer, is a collection of programs that interface the user to the system. For an in-depth discussion of DOS, IBM's *DOS Manual* provides all the necessary details, especially in the appendixes.

PR-256 must handle three interfaces to DOS. First, we would like DOS to automatically load the print program when the system is initially turned on or reset. Second, we need DOS to give the initialization code of PR-256 control to set up the printing program for execution. Third, during the initialization of PR-256, we need to tell DOS that the area in memory that the program occupies should not be overlaid during system operation. In order to understand how this is all accomplished, a short discussion of the inner workings of DOS is in order.

Let's begin by looking at an overview of what DOS must do when the system is initially powered on (or reset). DOS begins by executing a series of initialization routines that check the equipment status of the system (i.e., how much memory is installed, how many drives, what type of monitor, etc.). This check is followed by an initialization of any attached devices, setting up the interrupt vector table, and an assortment of other jobs that are necessary to get the system ready for operation.

After the initialization phase is completed, DOS loads a file from the system disk called COMMAND.COM. (A system disk is the one that has the proper files on it to permit you to load and start up DOS.) If you look at any of your system disks, you will find a file by that name. It is the code in this file that acts as a *command processor*. Essentially, all communication with DOS will be handled by COMMAND.

When COMMAND is executed, it does various and assorted tasks before issuing the first user prompt. One of these first tasks is to check for a file called AUTOEXEC.BAT on the system disk. This is a special file. The extension ".BAT" indicates that the file is a batch file, which means that its contents are read and executed as if a user were typing at a keyboard. Thus, if you include a line that says DIR in a batch file, a directory of the currently selected disk will be displayed on the screen just as if you had typed in the DIR command at the keyboard.

The "AUTOEXEC" portion of the name indicates that this is a file that is to be automatically executed whenever the system is started. With this facility, the user can cause programs or DOS commands to be executed im-

CompuPro

8 and/or 16 Bits.

A **CompuPro Systems Center** is much more than a computer store: It is the first place to look for business, scientific, and industrial computing solutions. When you're ready for professional level, state-of-the-art microcomputing, turn to the professionals listed below . . . they're ready for you.

ARIZONA

S-100
14425 N. 79th St. #B
Scottsdale, AZ 85260
(602) 991-7870

CALIFORNIA

Computer Center, Inc.
1514 University Ave.
Berkeley, CA 94703
(415) 845-6366

Logic Systems
4800 Manzanita Ave. #21
Carmichael, CA 95608
(916) 971-3133

Priority 1
9161 Deering Ave.
Chatsworth, CA 91311
(213) 709-5464

Byte Shop of Hayward
1122 B St.
Hayward, CA 94541
(415) 886-4732

Gifford Computers
2323 Corinth Ave.
Los Angeles, CA 90064
(213) 477-3921

ACC
833 Steirlin Road #B110
Mountain View, CA 94043
(415) 969-4969

Computer Center, Inc.
2100 Broadway St.
Oakland, CA 94612
(415) 839-3230

System Interface Consultants
17440 Revello Dr.
Pacific Palisades, CA 90272
(213) 454-2100

Best Computer Stores, Inc.
5516 Springdale Ave.
Pleasanton, CA 94566
(415) 463-2233

Advanced Information Mgmt.
145 Kentucky St.
Petaluma, CA 94952
(707) 763-7283

Gifford Computers
230 California St. #207
San Francisco, CA 94104
(415) 391-4570

Gifford Computers
1922 Republic Ave.
San Leandro, CA 94577
(415) 895-0798

Computer House
501 B St.
San Rafael, CA 94901
(415) 453-0865

Data Bank
629 State St.
Santa Barbara, CA 93101
(805) 962-8489

www.americanradiohistory.com

mediately every time the system is started. If the file is not present, COMMAND continues on. If the file exists, however, COMMAND loads and processes the file as a normal batch file. The AUTOEXEC file is set up by the user. We will use this feature to load and initialize PR-256 every time the system is started.

After COMMAND finishes its initial tasks, it prompts the user with the familiar A> and then looks to the keyboard for user input.

Let us take a closer look at how we can use AUTOEXEC. PR-256 needs to be loaded into RAM and then must do a little setup before it is ready to operate. Because PR-256 exists on the disk as an assembled and linked machine program, all that is required of AUTOEXEC is to request "PR-256." COMMAND will see this as it processes AUTOEXEC and will go to the default drive, where it will find the file called PR-256, load it, and initiate execution of the file.

It appears that loading PR-256 and initializing it are fairly simple to do using DOS. However, we would like to return to DOS after PR-256 initialization is finished. To accomplish this, we must work through a special area of memory called a Program Segment Prefix buffer or PSP. The PSP is a special data structure that COMMAND builds for any process before it loads and starts up that process. This is simply 256 bytes of RAM set aside for various communication protocols with DOS. For example, if you have a program that needs to do some disk I/O, portions of the PSP are set up to permit DOS to do the actual I/O transfers.

We need concern ourselves with the PSP for only two things. First, we need to realize that it is there. When DOS loads in PR-256, it will set up a PSP in the lowest available RAM space and will then load PR-256 in the RAM area immediately following the PSP. Thus, our program actually grows by 256 bytes in order to make room for the PSP.

The second reason is as follows: When DOS loads in a program and gives it control to execute, DOS expects to gain control back eventually. And it has to have a standard way to get this control. DOS expects the user program to issue a special interrupt call when it is ready for DOS to regain control of the system.

Three different interrupts may be used to start up DOS again. An INT 20H is the normal way to exit from a program. An INT 27H is an "End but stay resident" command. This is what we shall use. It tells DOS that the program is to remain in the system and that DOS should take care not to move some other program on top of this one. The third interrupt is a special INT 21H that we will not be concerned with here.

IBM warns in the *DOS Manual* that "every program must ensure that the CS register contains the segment address of its Program Segment Prefix control block prior to issuing INT 20H (or INT 27H or INT 21H)." This is necessary because DOS saves certain state values and other information in the PSP and, for proper ter-

Spoken Here...

Matrix Computers
720 Mendocino Ave.
Santa Rosa, CA 95401
(707) 542-0571

Pragmatic Designs, Inc.
950 Benicia Ave.
Sunnyvale, CA 94086
(408) 736-8670

FLORIDA

Micro Computer Technology
1549 W. Brandon Blvd.
Brandon, FL 33511
(813) 685-7659

HAWAII

Capacity Plus Computers
250 Alamaha St. N14
Kahului Maui, HI 96732
(808) 877-3496

ILLINOIS

Computers Plus
201 N. Main St.
Athens, IL 62613
(217) 636-8491

MASSACHUSETTS

New England Electronic Exch.
138 Arlington St.
Boston, MA 02116
(617) 738-7306

Key Micro Systems
822 Boylston St.
Chestnut Hill, MA 02167
(617) 738-7305

MARYLAND

JR Systems
8227 Woodmont Ave. #200
Bethesda, MD 20014
(301) 657-3598

NORTH CAROLINA

Friendly Computer Store
4614-B West Market St.
Greensboro, NC 27404
(919) 294-1491

OKLAHOMA

Gifford Computers
6161 N. May #177
Oklahoma City, OK 73112
(405) 840-1175

OREGON

Microwest Computer Products
811 E. Burnside #117
Portland, OR 97214
(503) 238-6274

RHODE ISLAND

Key Micro Systems
1606 Nooseneck
Coventry, RI 02816
(401) 828-7270

WISCONSIN

Byte Shop of Milwaukee
4840 S. 76th St.
Greenfield, WI 53220
(414) 281-7004

UNITED KINGDOM

Comcen Technology Ltd.
45/46 Wychtree St., Morriston
Swansea SA6 8EX
United Kingdom
(0792) 796000

CompuPro®

CompuPro division, Godbout Electronics,
Box 2355, Oakland Airport, CA 94614

www.americanradiohistory.com

mination of the program, must access these.

Now this is a tricky problem. When DOS sets up the PSP and loads in the program, it sets the CS register to the "paragraph" at the start of the program, not the start of the PSP. (A paragraph in this context refers to the 16-byte "granularity" or increment that the CS register is able to address in the 8088.) When the program finishes execution and issues the INT 27H to return control to DOS, it must somehow move the correct value into the CS register.

Thankfully, COMMAND gives us an easy way out. When the PSP is initially built, COMMAND places an INT 20H instruction into the first 2 bytes of the PSP. In order for PR-256's initialization routine to return control to DOS, the user program can issue a jump instruction to the first byte of the PSP. We can construct the jump in such a way that it will replace the CS register with the proper segment address for the PSP. The resulting INT call has the proper CS value and DOS comes back online.

The astute reader will have noticed that the PSP contains an INT 20H command and we need an INT 27H executed. We simply alter this instruction during initialization of PR-256 and everything works great.

PR-256 Initialization

We have two fundamentally different tasks for PR-256 to do. First, it must set up the interrupt vector table and return to DOS control. This task has to be done only once, when the program is initially given control by COMMAND. This is called the initialization process or phase. The second task is to intercept all output data heading toward the printer and process it to effectively give the user the 256-character set desired. This is the run-time process.

We have already discussed how to interface with DOS on system reset. I will now describe the complete initialization process of PR-256. If you look at the PR-256 listing, you will notice that the first code encountered is the initialization code. It consists simply of a call to an initialization subroutine and a return. It is within this subroutine that the initial tasks are done. I could have just as easily put this code in the main program rather than make it a subroutine, but let me explain why I did not.

When PR-256 returns control to DOS after initialization via the INT 27H command, DOS expects the internal register DX to point to the last memory address plus one, after which it is okay for DOS to overlay. Because we execute the initialization code only once, we can let DOS overlay that portion of PR-256 and we will miss nothing. Thus, by making the initialization code a subroutine, I was able to place it after all the run-time code. I could then set the DX to point to the last address of run-time code on the INT 27H call. The space occupied by the initialization subroutine is now available to DOS. This saves us a little more RAM for other uses.

The initialization routine does several things. First, it simply changes the INT 20H command in the PSP to an INT 27H. Then it replaces the interrupt vector address for INT 17H with the start of the PR-256 run-time code, saves the old vector address (for reasons discussed later), and sets up a return to DOS to keep the run-time code resident. After DOS regains control, PR-256 just lies in hiding in the system. It is invoked by any process that wishes to send a character to a printer.

Printer Notes

So far I have discussed the 8088 interrupt structure and IBM DOS interface as far as they affect PR-256. In this section, I will present a quick overview of the Epson MX-100 and MX-80 (with graphics option) printers. Again, all references to the MX-100 are also valid for the MX-80 or IBM printer with the required Graftrax graphics option.

The Epson MX-100 printer is a dot-matrix printer loaded with features. In its normal operating mode, the MX-100 can print the standard ASCII (American National Standard Code for Information Interchange) character set. This includes the entire uppercase and lowercase alphabet, the numerals, and other standard characters in the 96-character set. In addition, the MX-100 offers a small set of "international" characters. These are subdivided into characters associated with various countries: France, Germany, England, Denmark, Sweden, Italy, and Spain. A total of 37 additional unique characters are available using these different international modes.

Finally, the MX-100 provides the user the capability of a *bit-image* mode. To understand how this works, let's look at the Epson print head. It consists of nine "needles" or "wires" stacked vertically very close together. Each wire can be caused to impact with the ribbon by the electronics in the printer. The stack of wires moves horizontally to the left or right. By causing specific wires to impact with the ribbon as the head moves along the width of the paper, the printer produces dots that form the shape of a character.

By placing the printer in the bit-image mode, the user can gain direct access to the top eight of the nine wires. A single byte sent from the computer to the MX-100 in bit-image mode will cause a single column of dot wires to act and the print head to move one column to the right. Because a byte consists of 8 bits, each bit controls one wire. The most significant bit (bit 7) activates the uppermost wire. Bit 0 activates the lowest wire. If a bit is "1," the print wire prints a dot. A "0" does not print.

Sending a stream of bytes in the bit-image mode results in a pattern being printed across the page. When putting the printer in bit-image mode (as discussed below), the user must supply a count of the number of columns to be printed. After that many columns are received, the printer leaves the bit-image mode and returns to whatever mode it was previously in.

How do we change modes in the MX-100? The user sends some non-printing ASCII code or escape sequence to the printer. The processor in the MX-100 interprets it and then acts accordingly. An escape sequence is a multibyte command string that begins with an ESC character

www.americanradiohistory.com

WE'LL GETCHA!

If Esprit II™ didn't, the Esprit III™ will.

Hazeltine's Esprit II™ gave you better cost/performance than any other budget terminal. Better than TVI-910. Better than Viewpoint. Better than ADM-3A. It got a lot of you.

Now we're going to get the rest of you.

The new Hazeltine Esprit III™ emulates TVI-950. The same features. The same keyboard layout. The same command set. Even the same user-PROM capability. The only difference is price. Esprit III costs $300 less.

In fact, it costs $100 less than TeleVideo's far less capable TVI-925.

So, now there isn't a terminal left with more performance for the money than a Hazeltine Esprit. Which is why you ought to get one. Or more.

Got it?

Hazeltine Corporation
Computer Terminal Equipment
Commack, NY 11725
(516) 462-5598
or call toll free: 800-645-4508

Hazeltine

The new terminal technology.

	Esprit	ADM 3A*	TVI 910*	Esprit II	View-point*	Esprit III	TVI 925*	TVI 950*
Detached keyboard	No	No	No	Yes	Yes	Yes	Yes	Yes
Buffered mode	Yes	No	No	Yes	No	Yes	Yes	Yes
Tilt screen	No	No	No	Yes	No	Yes	Yes	Yes
Function keys	14	No	10	14	3	22	22	22
Line graphics	No	No	No	No	No	Yes	No	Yes
Page/line transmit	Yes	No	No	Yes	No	Yes	Yes	Yes
Character/line editing	Partial	No	No	Yes	No	Yes	Yes	Yes
Split screen	No	No	No	No	Yes	Yes	Yes	Yes
Smooth scrolling	No	No	No	No	No	Yes	No	Yes
Price (in quantity of one)	**$595**	$595	$699	**$645**	$645	**$895**	$995	$1,195

*Trademarks respectively of Lear Siegler, Inc., TeleVideo Systems, Inc. and Applied Digital Data Systems, Inc.

www.americanradiohistory.com

Control Code	Hexadecimal	Decimal	Function
NUL	00	0	NULL. Ends tab setting. Follows ESC B and ESC C.
BEL	07	7	BELL. Sounds buzzer for about 1 second.
BS	08	8	Backspace. Cancels a last character input.
HT	09	9	Horizontal Tabulation.
LF	0A	10	Linefeed.
VT	0B	11	Vertical Tabulation.
FF	0C	12	Form Feed. Advances paper to next Top of Form.
CR	0D	13	Carriage Return.
SO	0E	14	Shift Out. Turns on the enlarged-character printing mode.
SI	0F	15	Shift In. Turns on the condensed-character printing mode.
DC1	11	17	Device Control 1. Selects printer. Ready to receive data.
DC2	12	18	Device Control 2. Turns off the condensed-character printing mode.
DC3	13	19	Device Control 3. Deselects printer. Not ready to receive data.
DC4	14	20	Device Control 4. Turns off the enlarged-character printing mode.
ESC	1B	27	Escape. ASCII code for Escape. Precedes numbers and alphabets.
ESC 0	30	48	Sets a line spacing to eight lines per inch.
ESC 2	32	50	Sets a line spacing to six lines per inch.
ESC 8	38	56	Deselects paper end detector.
ESC 9	39	57	Selects paper end detector.
ESC A	41	65	Sets a line spacing between a range from 1/8 inch to 255/216 inch.
ESC B	42	66	Sets VT up to eight positions.
ESC C	43	67	Sets form length up to 127 lines or 22 inches.
ESC D	44	68	Sets HT up to 12 positions.
ESC E	45	69	Turns on the emphasized-character printing mode.
ESC F	46	70	Turns off the emphasized-character printing mode.
ESC K	4B	75	Turns on the normal-density bit-image mode.
ESC L	4C	76	Turns on the dual-density bit-image mode.
ESC N	4E	78	Sets skip-over perforation.
ESC O	4F	79	Releases skip-over perforation.
ESC Q	51	81	Sets a column length.
ESC R	52	82	Selects an international character set from among eight languages.

Table 1: Control codes for the Epson MX-100 printer (or the Epson MX-80 with graphics capability).

(decimal 27 in ASCII) and is followed by a defined sequence of bytes. The printer's processor parses in the whole sequence of bytes and performs a mode change in response.

For example, to tell the printer to turn on normal bit-density mode, the user program sends the ASCII character 27 (Escape character) followed by a K. The K will not be printed. It merely tells the printer that the escape sequence is selecting the normal bit-image mode. For a summary of the control codes and escape sequences used by the MX-100, see table 1.

As many different modes are available (i.e., normal-density bit-image, dual-density bit-image, condensed-character, enlarged-character, normal-character, etc.), many different escape sequences will be accepted by the printer. Epson decided not to be modular and has designated some mode selectors to be set using other nonprinting ASCII characters rather than have all mode selection be done via escape sequences.

Several standard ASCII printer commands are used by the Epson. These include Bell (ASCII 7), Backspace (ASCII 8), Carriage Return (ASCII 13), Linefeed (ASCII 10), and so on. As I will discuss below, these special characters present some big problems for PR-256.

To summarize, the MX-100 simply looks to the computer for ASCII sequences. Most of the bytes that the printer receives are associated with some character in the ASCII set, which is then printed.

Some ASCII codes and sequences of codes are reserved by the MX-100 to allow the user to change modes of the printer. Thus, from BASIC at the IBM terminal, the user can send (using LPRINT) the proper commands to move the printer from enlarged-character mode to bit-image mode and then to normal print mode. This gives the user considerable power from software. It is just this power that PR-256 uses to enlarge the MX-100 character set to the full 256 characters used by the IBM system.

How PR-256 Works

I have now discussed the three major components that are necessary for understanding the PR-256 program. These are the 8088 interrupt structure (and its ties with the IBM BIOS routines), the DOS interfacing required to load and initialize PR-256 at system start-up, and the MX-100 modes of operation. The remainder of this article is devoted to using this knowledge to see exactly how PR-256 operates. Numerous subtle touches are contained throughout PR-256, which I will explain as we proceed.

First, let's look at how a process running on the IBM Personal Computer normally prints out text. Any routine that wishes to print out characters to a printer attached to the IBM PC will use the BIOS PRINTER_IO routine. The operation of this routine is very straightforward. The calling process will make one call to PRINTER_IO for each character to be printed out.

The calling process must first move the character to be printed into the AL internal register of the 8088, clear the AH register, and indicate the printer number in the DX register. (Note: the IBM can be attached to as many as three parallel port printers at one time, and the user must specify which of the three printers the current character is to be directed to.)

After setting these registers up, the

www.americanradiohistory.com

Expand your possibilities with Concurrent CP/M.™

If you have to wait impatiently for your personal computer to finish a job before moving on to another task, you need Concurrent CP/M. This new software technology from Digital Research increases the productivity of your IBM PC by allowing you to do more with it.

Using Concurrent CP/M, you can run several programs simultaneously, switching instantly from one program to another. For the first time you can write a letter while you do your financial planning. For the first time you can write text while printing other documents. For the first time you can edit programs while your program compiles. Concurrent CP/M is the best investment you can make in microcomputing because it multiplies the value of your hardware and lets you use all the CP/M compatible programs. And if you're developing software, it ensures that you're on the crest of the hottest new wave in the business.

So quadruple the effectiveness of your IBM Personal Computer with Concurrent CP/M. See your local microcomputer dealer.

Circle 150 on Inquiry card.

Now your IBM® PC can do more than one thing at a time.

The logo, tagline and names of DRI products are either trademarks or registered trademarks of Digital Research Inc.
IBM is a registered trademark of International Business Machines, Corp.
©Copyright 1982 by Digital Research Inc.

DIGITAL RESEARCH™
The creators of CP/M™

www.americanradiohistory.com

process executes an INT 17H interrupt request. This causes the BIOS print routine (PRINTER_IO) to send out the character to the printer. When it is done, the BIOS print routine executes an IRET instruction to return control to the calling process.

Instead of causing a character to be printed out, we can also use PRINTER_IO to initialize any of the printers or to check the current status of a printer. This is accomplished by placing a 1 or 2, respectively, into the AH register and executing an INT 17H call.

All programs that output data through the parallel port to a printer are supposed to use this method. IBM's BASIC, DOS, the Print Screen function, Micropro's Wordstar, and so on, all comply with this standard method. Thus, if I wish to replace the PRINTER_IO routine with my own, I had better be sure that, for any given input, PR-256 (the program scheduled to replace PRINTER_IO) will react in the same manner as PRINTER_IO would.

With this understanding of PRINTER_IO, I can outline PR-256 operation. Whenever a process executes an INT 17H instruction, PR-256 will receive control of the system. The input to the routine is identical to the PRINTER_IO routine. If PR-256 sees that a character is to be printed out, it does some processing of the character (which will be described in a moment) and takes an appropriate action that results in the IBM-defined character being printed out on the MX-100.

If the input to PR-256 indicates that a printer initialization or a status check is being requested, the requested function is carried out and the results returned to the calling process. That is all there is to PR-256. Everything else is implementation detail. Of course, the implementation details are extremely important and will be fully explored now.

Using the PRINTER_IO Routine

One of the tenets of good programming practice is that a programmer should not constantly be reinventing the wheel. If other programmers have already done the work that you need, see if you can use their results. In the case of PR-256, it made sense to make as much use as possible of the 114-byte PRINTER_IO subroutine that IBM supplied in the BIOS.

After processing a character, PR-256 at some point must interact with the printer. Most of the time, the printer output from PR-256 will be the same as that from the PRINTER_IO routine. PR-256 simply provides some front-end work or preprocessing of certain characters. Thus, I decided early on that PR-256 would do whatever processing was required for a given character, but would use the PRINTER_IO code to do the actual data transmission to the printers.

In order to do this, the PR-256 initialization code must save the 4-byte address of PRINTER_IO that was originally stored in the interrupt vector table. This saved address is later used by the main PR-256 process as a subroutine address for doing actual printer I/O.

Note that instead of having PR-256 bother to look up and save the PRINTER_IO address every time the system was initialized, I could have coded the address into the program as a constant. This would have saved a little code and storage space. However, this would have made PR-256 more susceptible to failure if IBM made future changes in its BIOS chip.

If IBM updates its BIOS routine in some later version of the Personal Computer, the base address of PRINTER_IO could be changed. This would not affect any code using PRINTER_IO, because DOS would be updated to initialize the interrupt vector table to the correct address. But if PR-256 had the original address for PRINTER_IO coded in as a constant, it would not work on the new version. By always getting the address from the vector table, PR-256 is sure to have the correct address.

Another item worthy of note is the way in which PR-256 calls the PRINTER_IO routine. This routine was designed to execute as an interrupt-service routine and returns to the calling process via an IRET instruction. PR-256, however, cannot call PRINTER_IO as an interrupt,

CALL YOUR LOCAL DYSAN OFFICE

CA: Los Angeles (213) 907-1803
Orange County (714) 851-9462
Sacramento (916) 966-8037
San Francisco/Sunnyvale (408) 727-9552

DC: Washington (703) 356-6441

GA: Atlanta *(404) 952-0919

IL: Chicago (312) 882-8176 (800) 323-5609

MA: Boston (617) 273-5955 *(617) 229-2800

MI: Detroit (313) 525-8240

MN: Minneapolis *(612) 814-7199

MO: St. Louis (314) 434-4011

NY: New York (212) 687-7122

OH: Cleveland (216) 333-3725

PA: Pittsburgh (412) 261-0406
Philadelphia (609) 939-4762

TX: Dallas/Ft. Worth *(817) 261-5312

WA: Seattle (206) 455-4725

*Includes OEM Sales

Dysan Diskettes are also available from all ComputerLand Stores, Sears Business Systems Centers, and many independent computer outlets nationwide.

For the location of the Dysan sales outlet nearest you, contact Dysan at:
(408) 988-3472
Toll Free: (800) 538-8133
Telex: 171551 DYSAN SNTA
TWX: 910-338-2144

Dysan® CORPORATION

Circle 160 on inquiry card.

www.americanradiohistory.com

WHAT IS THE TRUE COST OF A DISKETTE?

If you said at least $186.50*, you're probably close.

Confused? It's simple. The minimum cost of a one-sided, single density 8" diskette equals the purchase price plus the cost of the time to fully load the data onto the disc*. The adjacent diagram tells the story. As you can see, the purchase price of a diskette is a small fraction of the total cost of ownership. So why not pay a few cents more for the best diskette available?

That's where Dysan's quality comes in. Dysan diskettes and mini-diskettes are manufactured to the toughest quality standards in the industry. Every diskette is tested between the tracks as well as on the tracks to insure you 100% error-free recording over the entire disc surface. Dysan quality protects your investment of $186.50.

You know how costly time and data losses can be should your "bargain" diskette be faulty. Every penny you think you save on the purchase of magnetic media could cost you dearly. Why take the risk when you can have Dysan?

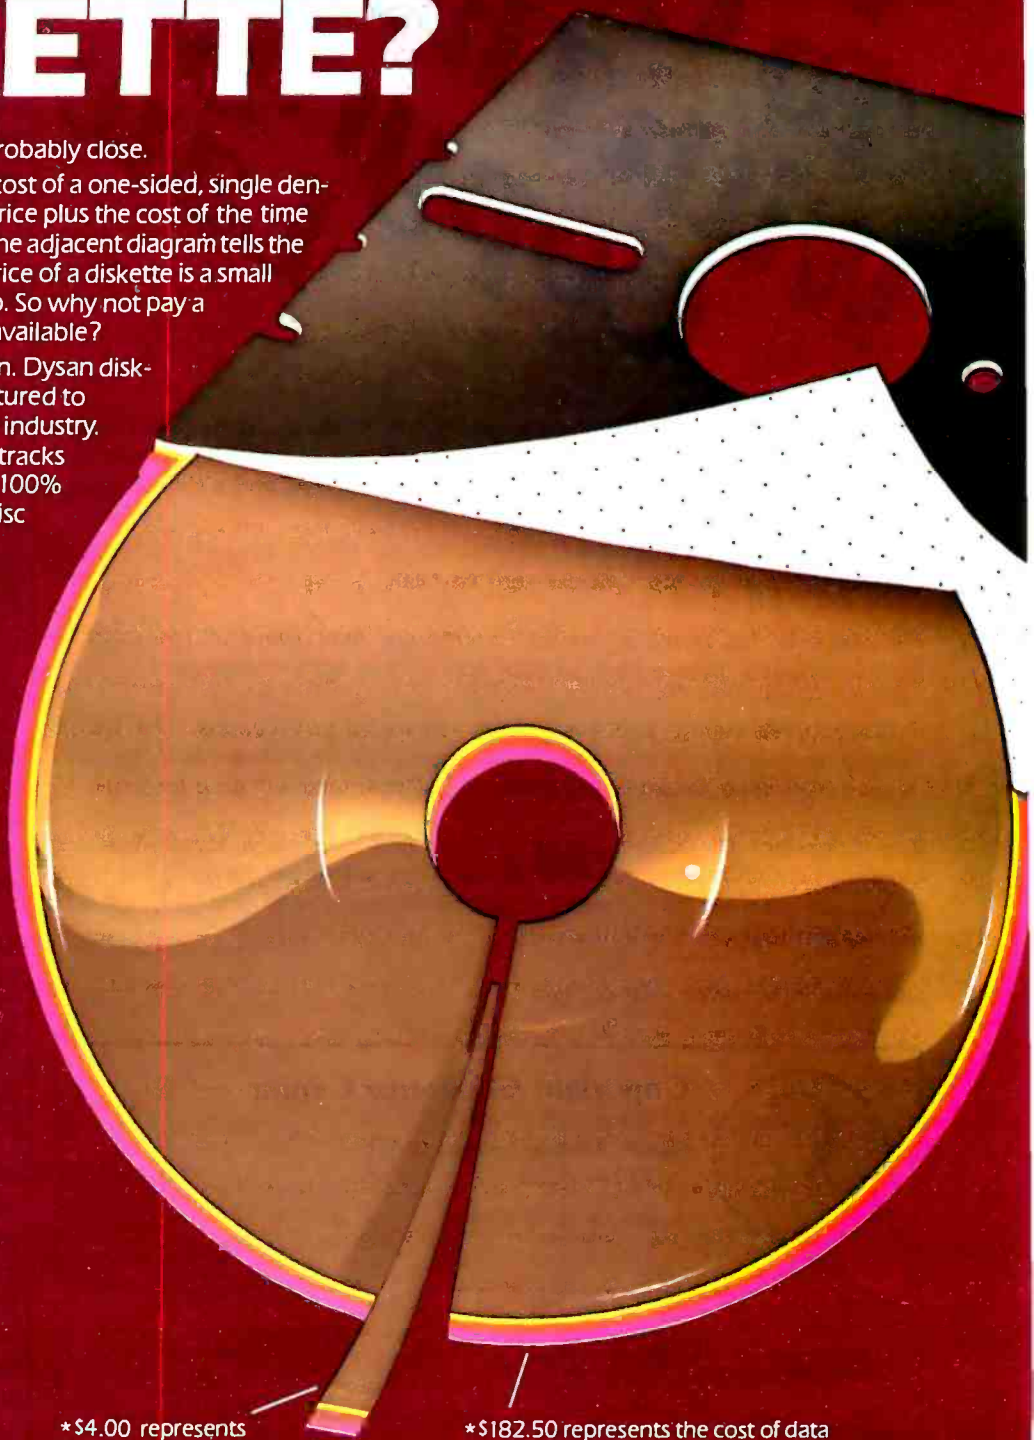

dysan Dysan® CORPORATION

Our Media Is Our Message.

5201 Patrick Henry Drive
Santa Clara, CA 95050

*$4.00 represents Dysan's suggested retail price for a one-sided, single density 8" diskette, packaged ten to a box. Minimum total cost of ownership = $186.50

*$182.50 represents the cost of data loading (approximately 22 hours at 11,106 keystrokes/hour at a labor cost of $8.23/hour), based on 1981 Data Entry Management Association (DEMA) National Averages.

www.americanradiohistory.com

How To Comply With The New Copyright Law

Libraries everywhere have found the easy way to fill photocopy requests legally and instantly, without the need to seek permissions, from this and over 3000 other key publications in business, science, humanities, and social science.

Participation in the Copyright Clearance Center (CCC) assures you of legal photocopying at the moment of need. You can:

Fill requests for multiple copies, interlibrary loan (beyond the CONTU guidelines), and reserve desk without fear of copyright infringement.

Supply copies simply and easily from registered publications. The CCC's flexible reporting system accepts photocopying reports and returns an itemized invoice. *You need not keep any records*, our computer will do it for you.

The Copyright Clearance Center is your one-stop place for on-the-spot clearance to photocopy for internal use. You will never have to decline a photocopy request or wonder about compliance with the law for any publication registered with the CCC.

For more information, just contact:



Copyright Clearance Center
21 Congress Street
Salem, Massachusetts 01970
(617) 744-3350

a not-for-profit corporation

NAME _____ TITLE _____

ORGANIZATION _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

COUNTRY _____ TELEPHONE _____

because it has already changed the interrupt vector table when it removed the address for PRINTER_IO.

If we look at the difference between an interrupt-service subroutine call and a standard 8088 subroutine call, we see that for a subroutine call the hardware pushes the CS and IP registers onto the system stack, while for an interrupt call it additionally pushes the Flag register onto the stack. Thus, on return from a normal call, the hardware will expect to pop off two values on a normal call, but will expect three values for an interrupt call.

If we can just keep the system stack straight across the call to PRINTER_IO, we can use it as a normal subroutine. The solution is simple. The 8088 hardware, on an interrupt call, pushes the Flag register onto the stack before CS and IP. This is great. All we have to do then is manually push the Flag register onto the stack ourselves (via a PUSHF instruction). Then we can call the PRINTER_IO routine as a normal subroutine. Upon execution completion, PRINTER_IO does an IRET that will pop off the proper sequence of words and leave the stack in good shape.

The last benefit that we get from using PRINTER_IO as a subroutine of PR-256 is that PR-256 does not need to be concerned with initialization of status checking of the printer. If PR-256 receives a request for either of these services, it immediately calls PRINTER_IO and then returns the results it receives.

Character-Set Definition

Let's now look at the character set of the IBM computer versus that of the Epson MX-100. A close comparison study breaks the 256 characters into five categories that PR-256 must handle in different ways. I have designated these categories as *Common*, *International*, *Graphics*, *Extended*, and *Control*. The following text describes each category and discusses the effect each had on the PR-256 design.

Common Characters

The first character category covers

www.americanradiohistory.com

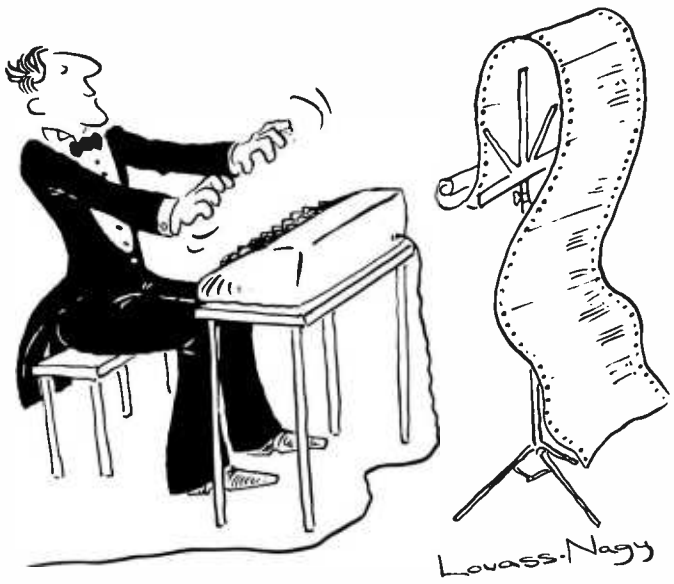

The Well-Tempered Cross-Assembler

Before Johann Sebastian Bach developed a new method of tuning, you had to change instruments practically every time you wanted to change keys. Very difficult.

Before Avocet introduced its family of cross-assemblers, developing micro-processor software was much the same. You needed a separate development system for practically every type of processor. Very difficult and very expensive.

But with Avocet's cross-assemblers, a single computer can develop software for virtually any microprocessor! Does that put us in a league with Bach? You decide

Development Tools That Work

Avocet cross-assemblers are fast, reliable and user-proven in over 3 years of actual use. Ask NASA, IBM, XEROX or the hundreds of other organizations that use them. Every time you see a new microprocessor-based product, there's a good chance it was developed with Avocet cross-assemblers.

Avocet cross-assemblers are easy to use. They run on any computer with CP/M* and process assembly language for the most popular microprocessor families.

XASM05 6805	
XASM09 6809	
XASM18 1802	
XASM48 .... 8048/8041	
XASM51 8051	$200
XASM65 6502	each
XASM68 .... 6800/01	
XASMF8 .... F8/3870	
XASMZ8 .... Z8	
XASM400.... COP400	
XASM75 .... NEC 7500	$500

(Coming soon: XASM68K .... 68000)

Turn Your Computer Into A Complete Development System

Of course, there's more. Avocet has the tools you need from start to finish to enter, assemble and test your software and finally cast it in EPROM:

Text Editor VEDIT -- full-screen text editor by CompuView. Makes source code entry a snap. Full-screen text editing, plus TECO-like macro facility for repetitive tasks. Pre-configured for over 40 terminals and personal computers as well as in user-configurable form.

CP/M-80 version $150
CP/M-86 or MDOS version $195
(when ordered with any Avocet product)

In-Circuit Emulators -- MICE In-Circuit Emulator by Microtek. Full capability emulation in a compact, inexpensive device. Accepts high-level ASCII commands through RS 232 serial interface. Down-loads programs generated by Avocet cross-assemblers .. examine and modify memory and registers, access I/O ports and control program execution in single instruction and single-cycle modes. Forward and backward tracing for up to 256 qualified cycles ... Assembly/Disassembly commands with symbolic labels make it easy to modify the program under test.

NOT AVAILABLE

MICE-I versions for 6502, 8048, 8085, NSC 800 and Z-80 ..... $1,795 each.

MICE-II versions with 2K trace and 32K program memory, plus real-time emulation and hardware break points for 6502, 6809, 68000, 8085 and 8086/8088 .... $3,995.

(6805 and 8051 versions available starting second quarter)

ROM Simulator -- ROMSIM by Inner Access eliminates need to erase and reprogram EPROM. Installed in an S-100 host, ROMSIM substitutes RAM for EPROM in external target system. 16K memory can be configured to simulate the 2708, 2758, 2716, 2516, 2732, 2532, 2764, 2564 in either byte or word organization. Avocet's configurable driver makes loading of HEX or COM files fast and easy.

From $495 depending on cabling and RAM installed.

EPROM Programmer -- Model 7128 EPROM Programmer by GTek programs most EPROMS without the need for personality modules. Self-contained power supply ... accepts ASCII commands and data from any computer through RS 232 serial interface. Cross-assembler hex object files can be down-loaded directly. Commands include verify and read, as well as partial programming.

PROM types supported: 2508, 2758, 2516, 2716, 2532, 2732, 2732A, 27C32, MCM8766, 2564, 2764, 27C64, 27128, 8748, 8741, 8749, 8742, 8751, 8755, plus Seeq and Xicor EEPROMS.

(Upgrade kits will be available for new PROM types as they are introduced.)

Programmer $389
Options include:
Software Driver Package ..... $ 30
RS 232 Cable ..... $ 30
8748 family socket adaptor ..... $ 98
8751 family socket adaptor $174

Call Us

If you're thinking about development systems, call us for some straight talk. If we don't have what you need, we'll help you find out who does. If you like, we'll even talk about Bach.

VISA and Mastercard accepted. All popular disc formats now available -- please specify. Prices do not include shipping and handling -- call for exact quotes. OEM INQUIRIES INVITED.

*Trademark of Digital Research.

AVOCET SYSTEMS INC.™
DEPT. 383-B
804 SOUTH STATE STREET
DOVER, DELAWARE 19901
302-734-0151

Circle 40 on inquiry card.

www.americanradiohistory.com

the Common characters. The characters of this type are the 95 characters (ASCII codes 32 to 126) that are common to both the IBM and the Epson. These are the printing characters defined by the ASCII standard except for ASCII 127, for which IBM uses a different character.

Once again, following the maxim of not reinventing the wheel, I designed PR-256 to spot any Common characters and send them on to the MX-100 as they are. They are printed using the Epson character set.

It is important that we look at how these different character types affect the performance of the MX-100. By separating Common characters out and using the Epson character set to print them, we see that PR-256 will exhibit virtually no difference in the throughput of normal text printing. The small amount of processing that PR-256 must do in order to determine that the current character is Common and then send it out to the printer is negligible compared to the speed of mechanical movement of the printer. Thus for normal text printing, PR-256 will not noticeably affect the printing speed of the Epson.

Another benefit of using the standard Epson set for Common characters is that it permits the use of all the character printing modes offered by the MX-100. Thus, for Common characters, the user can print condensed, normal, or enlarged characters. These may be emphasized or normal. All the MX-100 modes available are accessible to users through PR-256.

International Characters

The second character category in PR-256 includes most of the 37 unique extra characters in the seven international sets available on the Epson. Of these, 30 are also part of the IBM character set. To use these, PR-256 must map the IBM codes for an International character onto the specific international set in the Epson and the code that the Epson designates for that character.

PR-256 uses a bit map to determine if the current character is an International type. The bit map is a structure of bits stored in the program such that each bit is associated with a specific ASCII code. The value of the bit identifies whether the associated character is International (if the bit is 0) or not (if the bit is 1). PR-256 uses the value of the character sent with the calling routine as an index into the bit map (identified as BITTYP in the PR-256 listing) and determines whether that character is indeed International or not.

When an International character is identified, PR-256 does a table look-up to get the Epson international set to be used and the ASCII code that the MX-100 expects for the character. PR-256 then sends a sequence of commands to the MX-100.

PR-256 first sends an escape sequence (ESC "R") followed by the desired international-set designation (0 to 7) to put the Epson in the proper mode. Next, it sends the correct 8-bit code to print out the character. Finally, it sends out the escape sequence to place the Epson back into the international-set mode that it had previously been in.

In order to reset the international set to what it had previously been in, PR-256 must "remember" the last set that the MX-100 was placed in. How it does this is discussed later in the article. But it should be noted here that, in order to allow the user to access all the Epson capabilities, PR-256 must remember the latest international set selected by the user.

To the user, the printing of an International character looks like the character was part of the Epson's normal character set. The user program simply sent PR-256 a single value and the result was that the desired character was printed out. The user does not need to know that PR-256 actually sent a total of 7 bytes of data to the printer.

The effect of the International characters on performance is minimal. Even though PR-256 sent the MX-100 7 bytes of data, 6 of them were control codes used by the printer's processor. Only one caused the slow (as measured by computer speeds) mechanical action of printing a character.

Graphics Characters

The third classification of characters covers the Graphics characters. On the IBM PC, these characters have code values of 0 to 31, 127 to 178, and 224 to 255 (minus the International characters that are scattered throughout). These characters are not defined at all by the MX-100 and must be printed out via the MX-100 bit-image mode. When PR-256 spots a Graphics character to be printed, it takes the appropriate action to place the printer into the bit-image mode. It then sends the MX-100 a stream of bytes defining the columns of dots that will make up the character form. The Epson prints these out and then returns from the bit-image mode to its previous state.

One of the major decisions that I had to make in designing PR-256 was what size and density to make the Graphics characters. Should they be the same size as Epson's condensed, normal, or enlarged characters? Should they be emphasized or not? I could not duplicate all the MX-100 modes because it would have made PR-256 prohibitively large.

I finally decided that all Graphics characters would be the same size and density as Epson's normal-size emphasized characters. I believe that this was the best compromise. This way, they fit in comfortably with standard-size nonemphasized characters, but if you wish to print in the higher-quality emphasized mode, all the Graphics characters would fit in perfectly.

You should understand that if you place the Epson in a different mode—say the enlarged-character mode, and print out Common, International, and Graphics characters intermixed—the Common and International characters will be enlarged in size, but the Graphics ones will remain the normal size.

Having decided on using normal-size, emphasized Graphics characters, I had to analyze how Epson defines these. The MX-100 uses 12 columns to print out its normal-size emphasized characters. The first column is blank, followed by nine columns of character bits and two more blank

www.americanradiohistory.com

columns. The blank columns are character separators. PR-256 follows the same strategy.

PR-256 uses the dual-density bit-image mode of the Epson to send out 12 columns of data per Graphics character. It sends out one blank column followed by nine data columns followed by two blank columns. The data columns are accessed through a lookup table to give PR-256 the correct values to define the desired character. After receiving the 12 data bytes from PR-256, the MX-100 prints them out and returns to the mode it was previously in.

The user program is completely ignorant of what has occurred. It simply sends a single character value to be printed out. The result it sees is that the character has indeed been printed. The fact that PR-256 has sent 16 bytes of data to the MX-100 (4 setup bytes and 12 printing bytes) is hidden.

What is not hidden is the degradation of printing speed. Printing of Graphics characters is slower than Common and International characters. The speed is still more than sufficient to remain practical though.

Extended Characters

The fourth character type is the Extended type, which includes IBM character values 179 to 223. These are the drawing characters that are used to create nice connecting tables and borders. They are physically larger than the other characters defined by IBM. Extended characters are designed to connect to each other both in vertical and horizontal directions.

PR-256 handles Extended characters in much the same manner as it does Graphics characters. It simply extends the 9 data bytes of the Graphics character to cover the full 12 columns of dots allocated to each character. Thus, when printing out an Extended character, PR-256 looks at the first of the 9 data bytes for that character and prints it twice. Instead of printing a single blank column, it has extended the data column one to the left. After printing the 9 data bytes as in the Graphics mode, PR-256 retains the last byte and prints it out twice more, in place of the two blank columns printed by the Graphics mode.

By extending the character to the left and to the right, a string of Extended characters will connect in the horizontal direction exactly as they do on the IBM monitor. Unfortunately, for several reasons, it is not a simple matter to extend the characters in the vertical direction. Thus, the Extended characters are not guaranteed to connect vertically. It depends on how much space is inserted between lines. For examples of the Extended characters, see listing 2.

Control Characters

The final category of characters known to PR-256 covers Control characters. These include the ASCII characters 0, 7 to 20, and 27. These characters, reserved by the MX-100 to change modes of the MX-100, do things like Carriage Return, Linefeed, Backspace, Tabulation, and so on.

INVENTORY CONTROL LIKE THE BIG GUYS —AT LITTLE GUY PRICES

ARBA SYSTEM: Real time inventory control that starts with the ARBA RS-232 cash register and offers sophisticated Point of Sale and Inventory Control software.

ARBA Register
RS232 interface. . . Utilizes standard ASCII encoding. . . Twin Display Windows. . . Receipt and Detail Tapes. . . Cash, charge, received on account, paid out, void, discount keys. . . 11 key numeric pad. . . Tax, non tax functions. . .

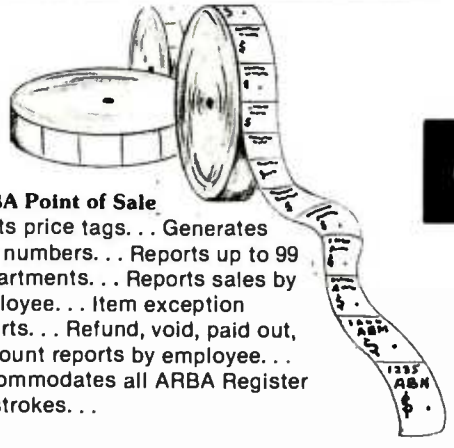

ARBA Point of Sale
Prints price tags. . . Generates part numbers. . . Reports up to 99 Departments. . . Reports sales by employee. . . Item exception reports. . . Refund, void, paid out, discount reports by employee. . . Accommodates all ARBA Register keystrokes. . .

Accounting Plus* Inventory Control
Up to 65,000 items. . . 12 digit alpha/numeric part number. . . Recommended order report. . . Sales analysis by department item or vendor. . . Gross margin analysis. . . Stock status reports. . . Year to date activity. . . Integrates with Accounting Plus. . .
Circle 31 on Inquiry card.

ARBA Register available separately. . . . $1295.00—Suggested Retail

Also available · Accounting Plus* General Ledger, Receivables, Payables, Payroll, Purchase Order. . . Runs under CP/M** and MP/M**

ARBA
ARBA Fine Business Computing Corporation
890 East Roosevelt Road
Lombard, Illinois 60148 (312) 620-8566

*TM Software Dimensions Inc., Citrus Heights, California
**TM Digital Research, Pacific Grove, California

DEALER INQUIRIES WELCOME

www.americanradiohistory.com

FORMULA INTERNATIONAL INC.

12603 Crenshaw Blvd., Hawthorne, CA 90250
For information (213) 973-1921 • Orders Only (outside Calif.) (800) 672-8758

pineapple™

The Alternative! The Compatible! The Affordable! 48K Color Computer Kit!

$645.00 EACH

(please add 5% shipping and handling)

FEATURES:

- ★ Fully compatible with Apple® II+
- ★ Singleboard for easy assembly
- ★ Popular 6502 MPU for large amount of software
- ★ Game paddle connector on both sides of case
- ★ Built in 2-watt amplifier for realistic sound effect with volume control
- ★ 8 on board peripheral connectors for expansion
- ★ 14 key numeric key-pad
- ★ 5-amp switching power supply

Easy to assemble! All components are clearly silk-screened on the high quality double-sided mother board. All integrated circuits, IC sockets, peripheral connectors, keyboard, switching power supply and the professional high impact plastic case are included.

NEW

High Quality 16K RAM Card Kit

(no cable required)

Same feature as the one we've been selling but without the mess of Dip-wire for Apple® & Pineapple™. **$59.95** per kit

5¼" Flexible Disc Sale

Why buy other brands when you can buy WABASH discs for much less and backed by 1-year factory warranty.
All discs come with Hub Rings

M13A411X	5¼" SSDD Soft Sector	$2.25	10-99
M43A411X	5¼" SSDD 10 Hard Sector	$2.25	
M53A411X	5¼" SSDD 16 Hard Sector	$2.25	
M14A411X	5¼" DSDD Soft Sector	$3.65	
F111111X	8" SSSD IBM compatible	$2.45	
F131211X	8" SSDD 26 sectors 128 bytes	$3.05	

At last! Here's the computer case everyone has been looking for!

Ideal for your homebrew *AP-II 6502 MPU based computer. Made with high impact plastic. Color and shape are compatible with the standard Apple II computers.

Introductory Offer
$150.00 ea.
Keyboard not included see our Ad in this page.

MODEL: AP-II

*AP-II model is compatible with Apple II but not manufactured by Apple Computers. Inc. ®Apple or Apple II is a registered trade mark of Apple Computers. Inc.

6502 MPU Based Computer Motherboard! You ask for it, you got it!

- ★ 48K on board memory (4116)
- ★ 12K on board EPROM memory (2716 or 2732)
- ★ 8 expansion slots for peripheral cards
- ★ Composite-video output
- ★ size: 14¼" × 8½"

$99.95 ea.

16K RAM Card Kit For Your Apple® & Pineapple™ Computer



Kit includes:
• High Quality P.C. Board • 8 ea. 4116 (200ns) • *All the IC's* & parts • 16-pin Dip wire • Easy to assemble. You can do it in less than 30 minutes! **$49.95** per kit

5¼" Disc Drive 100% Apple® & Pineapple™ Compatible

We did it once, response was great!
Now we are doing it again, don't miss it!
$295.00 ea. w/o controller
$385.00 ea w/controller

Replacement Keyboard For Your Apple® II Computer

Got a bad Keyboard? Here's the alternative!

- ★ Full ASCII code
- ★ N-key rollover function
- ★ TTL level output
- ★ On-Off indicator
- ★ Low power consumption
- ★ With upper/lower case function

$99.95 ea.

Switching Power Supply For Apple®, AP-II, and Pineapple Computer

Compact size switching power supply.

Specification:	4006A	4007A
+5V at	3A	5A
-5V at	2A	3A
+12V at	.5A	1A
-12V at	.5A	1A

4006A ..... **$99.00** ea. 4007A ..... **$145.00** ea.

Size: Width 3½", Depth 9¾", Height 2¼"
Size and mounting holes will be same as the one used in Apple II.

* Apple is a registered trademark of APPLE COMPUTERS. INC.

	SHIPPING AND HANDLING CHARGES Under $50.00 Purchase	Over $50.00 Purchase
Inside California	10%	5%
Outside Calif (Incl Mexico & Canada)	15%	10%
Overseas	25%	20%

Minimum Order $10.00 / Calif. Residents add 6.5% Sales Tax. Phone Orders Accepted on VISA or MC ONLY. NO C.O.D.'s. Prices subject to change without notice.

Circle 182 on Inquiry card.

STORE HOURS
MON-FRI — 10-7
SAT — 10-6

www.americanradiohistory.com

HERE'S THE PERSONAL COMPUTER AD OUR COMPETITION DOESN'T WANT YOU TO READ.

It's an ad for NEC's APC™ Advanced Personal Computer. A solutions-oriented system that solves business problems in the simplest, most cost-effective way. The APC supports both CP/M-86™ and MS-DOS.™ It can store more information than any system in its price range. In short, it's got the best price/performance of any personal computer. That's why our competition would pr... at you never see our syst...

We asked som... busi-... men who s... ystems ... us why t... ed us ... reason... rly un... s. They ... APC ... only p... mpute... arket ... e pow... 6-bit ... ssor ... disk ... city, ... on disp... mp... ppli-ca... e. F... et, the A... these ... d affo... e's w... y sa... uch...

...urs, ...ther." ...e sys-... good

... couldn't ...any that ... well as

...em that ...s in the

"That APC of yours is the most powerful computer of a... es I saw. I don't know how ... for that price."

"Now that I've used it f... awhile, I see why you name... *Advanced* Personal Computer."

And that from bus...ssmen who have tested t... petition! When you see the... you'll understand why, a... e others, all of these b... picked NEC.

Our business software was optimized to take advantage of the APC's unique hardware features. That makes system operation faster and easier.

Our software includes a full set of general accounting packages, word processing, mailing list management, business planning, database management, and communications. And we're readying many more.

We're the only company to back our software with a unique ...nconditional guarantee. It will ...rk or you get your money ...ck.

Our high-resolution color graphics run circles, arcs and lines around everybody else. The AP... screen images—line... characters pi... are unprecedented ... in their clarity. ...olors against resolution ...petitive systems often must.

compar... he APC ... for pla... alysis, da... nager... ord proce... s pan... al commu... work, ... e the A... nal fo... ronic m... ces... mput... ieta... datab... ic an... A... 32... t a... proc...

A un... n giv...

a...

Th... models...

The mo... combines a... black high-res... 128K bytes of u... a 1-million-byte f... keyboard and ma... dard features yo... on competitiv...

...petitive system...

See for yourself the personal computer our competition wishes had never been invented. The Advanced Personal Computer from NEC. Return the coupon to NEC Information Systems, Inc., 5 Militia Drive, Lexington, MA 02173.

Now available with NEC hard disk.

APC is a trademark of Nippon Electric Co., Ltd.
CP/M-86 is a trademark of Digital Research, Inc.
MS-DOS is a trademark of Microsoft, Inc.

Send me more information on the Advanced Personal Computer. BE383

Name _____ Address _____

Title _____ City, State, Zip _____

Company _____ Telephone _____

NEC
NEC Information Systems, Inc.
5 Militia Drive, Lexington, MA 02173

The Benchmark in World Class Computers

Circle 310 on inquiry card.

www.americanradiohistory.com

Listing 2: *Some examples of how certain graphics characters (the Extended characters) can connect together vertically using PR-256. In (2a) the printer was set at six lines per inch. The vertical lines of the box show large gaps. In (2b) the printer was set at eight lines per inch. In (2c) the printer was set at nine lines per inch. Here the characters connect together vertically and allow us to create some interesting patterns. In (2d) PR-256 is used to print out a mathematical formula. Note that the integral sign was made by vertically connecting two "hook" characters.*

(2a)

```
When the printer is set to print at 6 lines per inch, the
EXTENDED characters do not connect too well vertically.
```

(2b)

```
EXTENDED is not bad when the printer is set at 8 lines per inch
```

(2c)

```
If we send an ESC 'A' sequence with a parameter value 8,
then the EXTENDED characters do connect vertically.  The
escape sequence sets a line spacing of 8/72 of an inch.
This works okay as long as we insert blank lines between
each line of text.
```

(2d)

$$V = \lim_{\|\Delta\| \to 0} \sum_{i=1}^{n} \pi([f(\beta_i)]^2 - [g(\beta_i)]^2)\,\Delta_i x$$

$$= \pi \int_{-1}^{2} ([f(x)]^2 - [g(x)]^2)\,dx$$

Deciding how to handle these characters was the real headache of the PR-256 design. Indeed, these characters are difficult to display, let alone print out. In BASIC, the only way to display these characters is to use a POKE command to place them into display memory.

The problem for PR-256 is that it cannot guess what the user is trying to do. When it receives an ASCII 13 character as input (Carriage Return Control character), it must decide whether the user means to execute a carriage return on the printer or print out the musical note sign that is defined by the IBM character set as value 13. It is desirable to offer the user either possibility.

The solution is to allow several different options and force the user to make the decision. In PR-256, the user has three different modes for handling these Control characters. It is vital that the different modes be understood by the user.

The first mode is the "Pass-em thru" mode, which is the default mode for PR-256. In this mode, whenever a control code is spotted by PR-256, it simply sends that character on to the MX-100. Thus, the Control character is assumed to be a control code that the printer is to receive.

The second mode is the "Print it out" mode. This assumes that any control code is to be interpreted as a printing character rather than an MX-100 control code. In this mode, PR-256 will treat the character as a standard Graphics character and print out its IBM-defined form.

The third mode is a compromise. It is the "Print all but CR & LF" mode. Notice that in the second mode, there is no way for the user program to tell the Epson to move on to the next line on the paper. In that mode, if PR-256 receives a CR character, the output will be the musical note being printed to the paper on the printer. In order to permit CR and LF printer actions, this third mode is allowed. The only valid Control characters recognized by this mode are CR (ASCII 13) and LF (ASCII 10). These are sent on to the printer. Any other Control characters are interpreted as Graphics characters and printed out as such.

So how do you go about changing control modes in PR-256? The user program must physically change the contents of a memory location within PR-256 code. The address of PR-256 must be obtained from the interrupt vector table, and the offset into PR-256 is dependent on the printer number you wish to change. (Remember, PR-256 can work with up to three printers. If you have only a single printer attached to the system, it should be set up as printer #0.) The offset into PR-256 is 12 bytes for printer 0, 18 bytes for printer 1, or 24 bytes for printer 2. The mode values are:

Mode Type	Value
"Pass-em thru"	0
"Print it out"	1
"Print all but CR & LF"	2

A sample BASIC subroutine to change these modes is presented in listing 3. The patch routine in listing 4 allows you to change the default of PR-256 to some mode other than "Pass-em thru."

A word of caution is in store at this point. If PR-256 is in the default mode of "Pass-em thru" and the user performs a Print Screen function of the BASIC screen, a problem may occur. The problem stems from the display of the function keys that BASIC puts on the screen for the user.

If you enter BASIC and look at the display of the function keys, you will notice that on the second function-key display, after the letters "RUN," is a back arrow that IBM uses to indicate a carriage return. The ASCII code for this character is 27, the same as the Escape control code used by the Epson. When PR-256 is asked to print out this back arrow (for example, when you want to print out a page of BASIC commands), PR-256 checks its internal mode. If it is in the "Pass-em thru" mode, it will interpret this character as a Control character and send it on to the Epson rather than print out the Graphics version of the back arrow. This results in the MX-100

Text continued on page 356

www.americanradiohistory.com

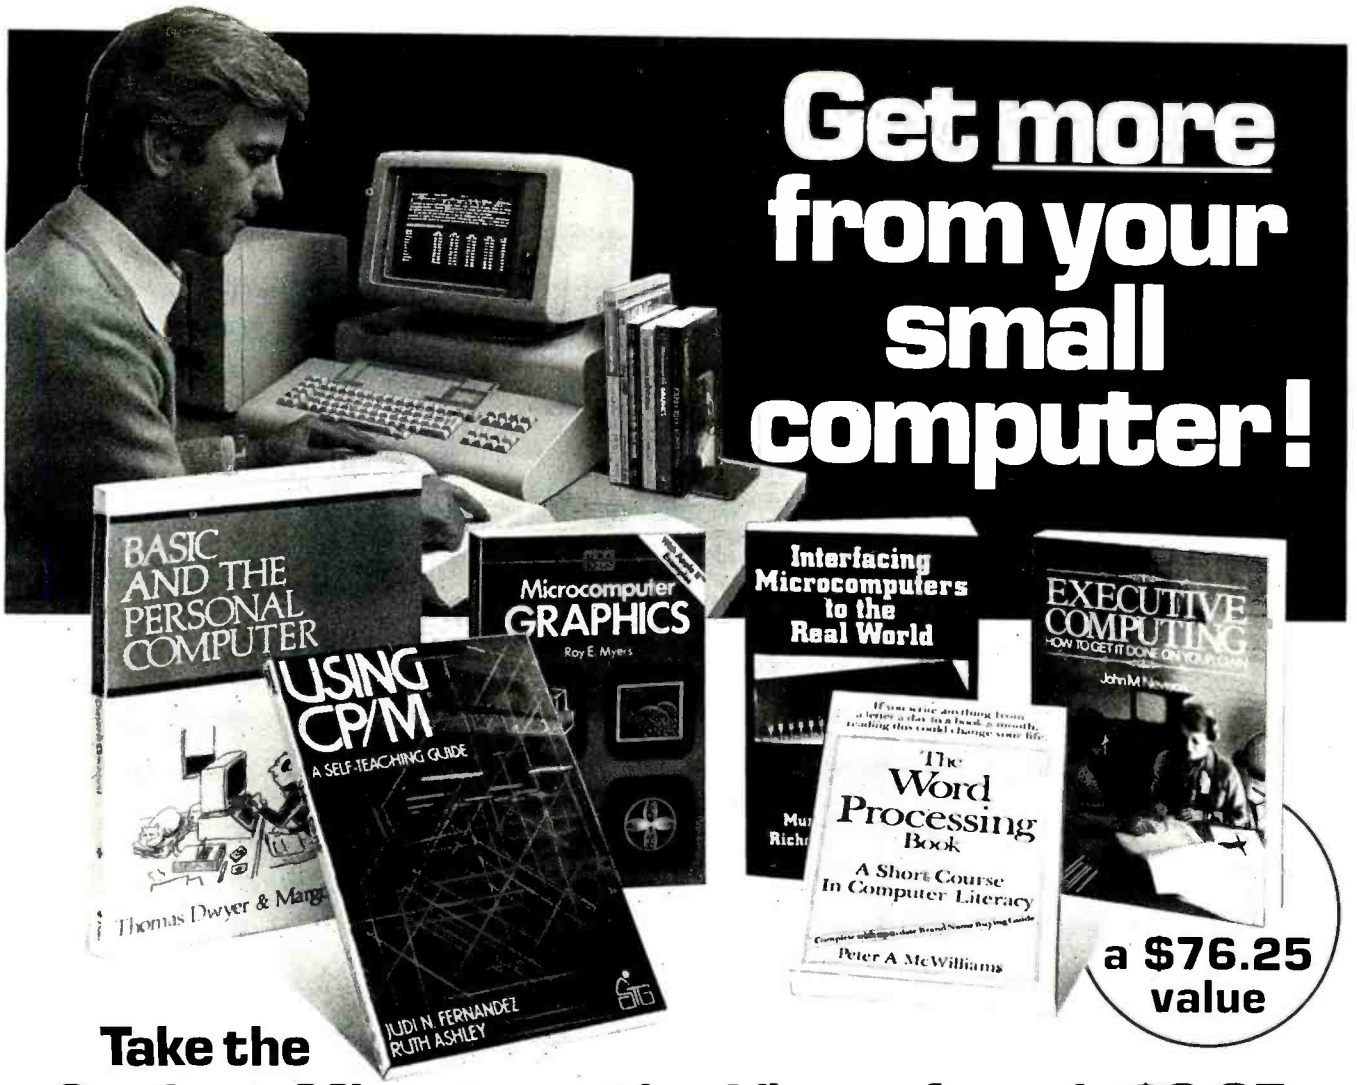

Take the 6-volume Microcomputing Library for only $2.95

when you join the Small Computer Book Club.

You simply agree to buy 3 more books—at handsome discounts—within the next 12 months.

This set of six carefully selected books—a $76.25 value—will be your basic reference source for small computing.

BASIC AND THE PERSONAL COMPUTER.
Thomas A. Dwyer and Margot Critchfield. Clear, down-to-earth introduction to programming in BASIC. Detailed examples and numerous illustrations explain the wide range of applications possible with personal computers. Also, many step-by-step examples of word processing, computer games, and computer simulations. **Publisher's Price $14.95**

USING CP/M: A Self-Teaching Guide.
J.N. Fernandez and R. Ashley. A complete introduction to the CP/M ("Control Program") software package used on many advanced microcomputers. How to use CP/M to copy files, edit, test programs, translate programs, and more—regardless of the programming language the microcomputer uses. **Publisher's Price $14.95**

MICROCOMPUTER GRAPHICS.
Roy E. Myers. Provides the essential mathematics and programming techniques you will need for computer graphics applications in BASIC, and shows you how to handle animated figures, peripheral equipment, colors and resolution, and many other topics. **Publisher's Price $11.95**

INTERFACING MICROCOMPUTERS TO THE REAL WORLD.
Murray Sargent III and Richard L. Shoemaker. The complete guide for computerizing your home, office, or laboratory. Tables, charts, and displays show you how to handle microcomputer software and operating systems; and how to monitor everything from the house lights to motors, switches, and display panels. Examples feature the Z-80 microprocessor. **Publisher's price $14.50**

THE WORD PROCESSING BOOK: A Short Course in Computer Literacy.
Peter A. McWilliams. You'll see how to save up to $15,000 by buying a small computer with word processing capacities. Includes a brand name buying guide. **Publisher's Price $9.95**

EXECUTIVE COMPUTING.
John Nevelson. 25 business methods illustrated by computer programs, in a step-by-step casebook. You'll find details on pricing techniques...long-range planning... corporate data bases...and much more. **Publisher's Price $9.95**

SMALL COMPUTER BOOK CLUB is a division of the Library of Computer and Information Sciences, the oldest, largest and most respected computer book club in the world. The SMALL COMPUTER BOOK CLUB will keep you up-to-date with the latest developments in software, improvements in hardware, programming languages, and much more—all at handsome discounts.

So start enjoying the club's benefits today.

4 Good Reasons to Join

1. The Finest Books. Of the hundreds of books submitted to us each year, only the very finest are selected and offered. Moreover, our books are always of equal quality to publishers' editions, *never* economy editions.

2. Big Savings. In addition to getting the Microcomputing Library for $2.95 when you join, you keep saving substantially—up to 30% and occasionally even more. (For example, your total savings as a trial member—including this introductory offer—can easily be over 50%. That's like getting every other book free!)

3. Bonus Books. Also, you will immediately become eligible to participate in our Bonus Book Plan, with savings up to 70% off the publishers' prices.

4. Convenient Service. At 3-4 week intervals (16 times per year) you will receive the Book Club News, describing the Main Selection and Alternate Selections, together with a dated reply card. If you want the Main Selection, do nothing and it will be sent to you automatically. If you prefer another selection, or no book at all, simply indicate your choice on the card, and return it by the date specified. You will have at least 10 days to decide. If, because of late mail delivery of the News, you should receive a book you do not want, we guarantee return postage.

If the reply card has been removed, please write to the Small Computer Book Club, Dept. Y-AA8, Riverside, N.J. 08075 to obtain membership information and an application.

www.americanradiohistory.com

Before you buy a multi-function RAM board for your IBM™ PC — here's what you need to know about ANATRON's "answerRAM"...

it gives your PC professional system expandability

The answer for business and professional users

Now, there's a high quality expansion board for your IBM PC that combines:

- up to 256K of additional RAM
- 3 complete I/O ports, fully compatible with your IBM
- the best communications interface you can buy

. . . "answerRAM" from ANATRON.

Memory and more — the most complete board yet

Most PC owners buy a multi-function RAM board for two reasons: for additional main memory, and to get additional Input/Output (I/O) ports without using up precious expansion slots on the IBM PC's motherboard.

Like all quality RAM boards, "answerRAM" gives you RAM expansion in 64K increments up to 256K, with parity checking, fully compatible with your IBM PC.

But beyond that, "answerRAM" is also the most comprehensive I/O board available — with two serial communications ports and one parallel printer port, fully wired — ready to go. Best of all — memory and all three I/O ports use only one slot!

ANATRON

Anatron, Inc.
202 West Bennett Street
Saline, Michigan 48176
1-800-521-0521

www.americanradiohistory.com

"answerRAM" lets your system grow

With "answerRAM's" I/O capability you can connect your PC simultaneously to a letter quality printer, a high speed printer, and a data service or local area network. Now, you can use the most appropriate printer for the job — without fussing to change cables or wasting your time. Or, you can access a data service or download data from your company main-frame computer, without disconnecting your printer.

So why buy a board that will limit future expansion, when "answerRAM" costs the same as less functional boards?

With "answerRAM" you get the most out of one expansion slot — saving others for future enhancements — so your system can grow as your needs grow.

The best communications interface — hands down

Take a close look at what is required to use the available I/O ports offered on other multi-function RAM boards. Not only are there fewer ports than "answerRAM" provides, but nearly all require you to modify the board, add connectors or use up additional slots to utilize all their I/O ports.

"answerRAM" is designed for business users who need a professional solution. All I/O ports connect through a single, heavy-duty 37-pin connector, rigidly mounted in the standard rear slot of your IBM PC — just like it belonged there. No flimsy ribbon cables snaking around the chassis. We've even made a unique, heavy-duty, shielded, "3-into-1" cable for attaching all peripherals.

Absolutely no clock — here's why

Unlike other boards, "answerRAM" does not include a board-mounted clock — by design. Your PC has an internal clock/calendar. True, it needs to be initialized each time the system is started, but board-mounted clocks that try to save you that trouble create new problems instead:

- they use address space that may conflict with future enhancements
- they must be disabled if your PC clock is to be synched with a network clock
- you must carry the clock software on all your system disks

We put our clock on our disk-controller board where it belongs.

Software to process faster, print more conveniently

"answerRAM" comes complete with software to make your additional RAM function like an electronic disk or as a print spooler. And we've included a nifty piece of software that lets you toggle the system's default printer port from one port to another with just a keystroke.

Sample Configuration

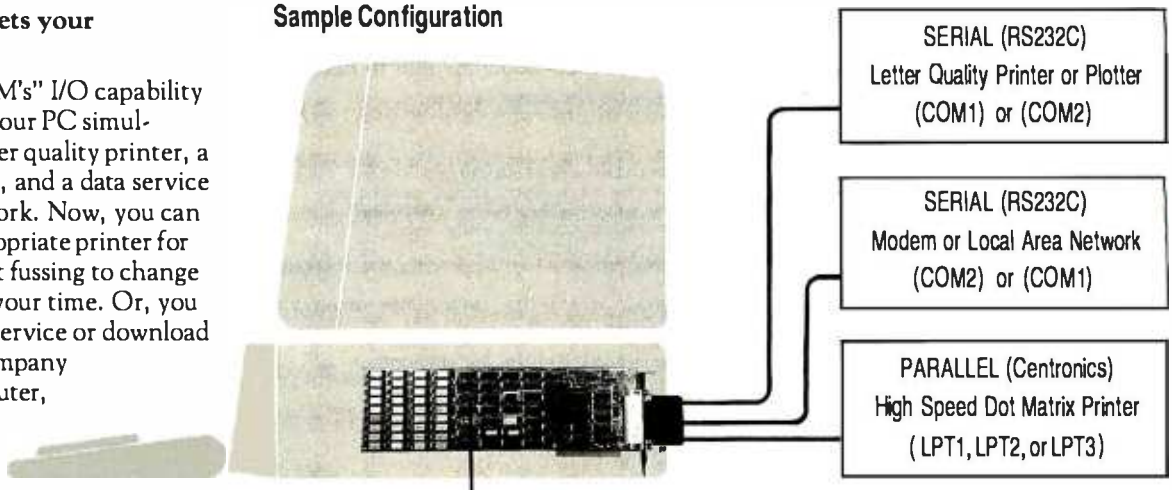

Comparison Chart

	2 Serial ports standard	1 Parallel port standard	I/O ports "ready-to-go"*	Electronic Disk	Print Spooler	Default Printer Toggle	Clock Calendar	Uses only 1 slot for all communications	Mfg. supplied cable/connectors**
ANATRON "answerRAM"™	●	●	●	●	●	●		●	●
AST ComboPlus™		●		●	●		●		
QUADRAM Quadboard™		●		●			●		
SEATTLE RAM+™				●					NA
TECMAR ALL in ONE™		●		●	●		●		

*all I/O ports factory-wired to all necessary connectors — no user modification required
**manufacturer's own cable available for interface to peripherals

Specifications:

Memory: 64K, 128K, 192K, or 256K with parity, just as IBM installed

I/O: 2 Asynchronous Serial ports
Configured as COM1 and COM2
Programmable, for 50-9600 baud; 1, 1.5, or 2 stop bit generation; even, odd or no bit parity, 5,6,7, or 8 bit character communication

1 Parallel Printer port
Configured as LPT1, LPT2, or LPT3

All ports can be disabled

Cable/Connectors: 37-pin commercial grade connector and support bracket mounts in chassis
"3-into-1" heavy duty cable with 37-pin connector
2 each DB25 (RS232C) connectors
1 each "Centronics" connector
Cable is jacketed and shielded

Manual: Illustrated 26 page manual in IBM PC owner's manual format

Warranty: One (1) full year on all parts and labor (second year extended warranty available)

IBM is a registered trademark of International Business Machines, Inc. answerRAM is a registered trademark of Anatron, Inc. ComboPlus is a registered trademark of AST Research, Inc. Quadboard is a registered trademark of Quadram Corporation. RAM+ is a registered trademark of Seattle Computer. ALL in ONE is a registered trademark of Tecmar, Inc.

Circle 493 on Inquiry card.

www.americanradiohistory.com

Listing 3: *A BASIC subroutine to change the printer mode.*

```
1000 ' PRINTER_MODE - this subroutine will set the printer mode in PR256.
1010 '
1020 '     INPUTS:    PRNUMB - printer number (0, 1, 2)
1030 '                PRMODE - printer mode (0 - "Pass-em thru"
1040 '                                       1 - "Print it out"
1045 '                                       2 - "Print all but CR & LF")
1050 '     OUTPUTS:   DEF SEG value is changed
1060 '
1070 DEF SEG = 0   'FIRST GET ADDRESS TO PR256 FROM INTERRUPT VECTOR TABLE
1080 INTVECT = &H17*4 'OFFSET INTO INTERRUPT TABLE
1090 TMPSEG = PEEK(INTVECT+3)*256 + PEEK(INTVECT+2)
1100 DEF SEG = TMPSEG:POKE (12+6*PRNUMB),PRMODE:RETURN
```

Listing 4: *A BASIC program called PATCH256. This will allow the user to have both Epson graphics printers and nongraphics printers on the same system.*

```
10 ' PATCH256 by Tim Field  June 13, 1982
20 '       This program will patch various printer configurations into
30 '       PR256 code.  This permits the user to have both Epson graphics
40 '       printers and non-graphics printers used properly on the same
50 '       system.  It also patches in the default CONTROL code mode.
60 CLS : KEY OFF : BASEADDR = 525
70 PRINT:PRINT:INPUT "Name of file containing PR256 program <PR256.EXE>";PGM$
80 IF LEN(PGM$) = 0 THEN PGM$ = "PR256.EXE"
90 IF ((INSTR(PGM$,".EXE")=0) AND (INSTR(PGM$,".exe")=0)) THEN PGM$=PGM$+".EXE"
100 OPEN PGM$ FOR INPUT AS 1:CLOSE 1
110 OPEN PGM$ AS 1 LEN = 1:FIELD 1,1 AS VALUE$
120 PRINT:INPUT "Which printer do you want to update (0,1,2)";PRNUMB
130 IF ((PRNUMB<0) OR (PRNUMB>2)) THEN PRINT "Invalid printer number":GOTO 120
140 PNMB = BASEADDR+(PRNUMB*6)
150 PRINT "Does printer";PRNUMB;
160 INPUT "contain Epson bit image capability (Y/N)";YN$
170 IF YN$="N" OR YN$="n" THEN GOTO 400
180 IF YN$<>"Y" AND YN$<>"y" THEN GOTO 150
190 ' If the printer selected has the bit image capability, we need to set
200 ' up the CONTROL character mode used by PR256.
210 CLS:PRINT:PRINT:PRINT
220 PRINT "PR256 has three different methods for handling control characters:"
230 PRINT:PRINT
240 PRINT "      1. 'Pass-em thru' - This mode sends any CONTROL character"
250 PRINT "           on to the printer as a control character.  This mode"
260 PRINT "           allows full user access to all Epson modes and functions."
270 PRINT
280 PRINT "      2. 'Print it out' - This mode interprets any CONTROL character"
290 PRINT "           as a printing character.  It allows no control codes to be"
300 PRINT "           sent to the Epson."
310 PRINT
320 PRINT "      3. 'Print all but CR & LF' - This mode sees only ASCII 13 and"
330 PRINT "           ASCII 10 (carriage return and line feed) as valid CONTROL"
340 PRINT "           codes.  All other CONTROL characters are assumed to be"
350 PRINT "           printing characters."
360 PRINT:PRINT:PRINT
370 PRINT "What mode should printer";PRNUMB;:INPUT "be set into (1,2,3)";PRMODE
380 IF PRMODE<1 OR PRMODE>3 THEN GOTO 370
390 GET 1,PNMB:LSET VALUE$=CHR$(PRMODE-1):PUT 1,PNMB
400 IF YN$="Y" OR YN$="y" THEN YNVAL = 0 ELSE YNVAL = 1
410 GET 1,PNMB+1:LSET VALUE$=CHR$(YNVAL):PUT 1,PNMB+1
420 PRINT:INPUT "Any more configurations (Y/N)";YN$
430 IF YN$="Y" OR YN$="y" THEN GOTO 120
440 CLOSE 1:SYSTEM
```

entering an undesirable state.

You can get around this problem in two ways. Either you can put the printer in the "Print all but CR & LF" mode (in which case the PR-256 will print out the back arrow as desired) or you can turn off the function-key display (issue a BASIC KEY OFF statement) before printing the screen. The first method prevents you from changing any MX-100 modes while in the "Print all but CR & LF" mode. The second method removes the function-key display from view momentarily.

BASIC also presents a small problem in the "Print it out" mode. Whenever BASIC is asked to use LPRINT to print an ASCII character 13, it assumes that the user is sending the printer a carriage return command. BASIC always tacks on a linefeed (ASCII 10) following the sending of the ASCII 13 character. In "Print it out" mode, this means two characters will be printed for each LPRINT CHR$(13) command issued.

IBM's BASIC version 1.1 provides a way to get around this problem via a "random" printing mode. A printer "opened" in random printing mode suppresses the automatic linefeed after a carriage return. To set the printer into random mode, issue an 'OPEN "LPT1:" AS #1: WIDTH #1, 255.' Now the character 13 can be printed using a 'PRINT 1, CHR$(13)' command.

PR-256 Internal Modes

If you look through the PR-256 listing (listing 5), you may notice a bunch of funny internal modes that are turned on and off. These include:

FULL_INSTR	GRAF_PRINTER
PREV_ESC	BIT_GRAF
FST_BITG	SEC_BITG
NEW_INTL	ESC_SINGLE
ESC_NULL	ESC_C

These are modes that are used to respond properly to various Epson printer modes specified by user programs.

FULL_INSTR mode is the three-way mode discussed above concerning how PR-256 handles Control characters. The three modes available in FULL_INSTR are the "Pass-em thru," "Print it out," and "Print all but CR & LF" modes.

GRAF_PRINTER mode is set by the user to tell PR-256 that the printer is not an Epson graphics printer. Because the IBM computer allows multiple printers to be attached at one time, it is reasonable to expect a business setup that would include a letter-quality printer attached to one port and an Epson dot-matrix printer on another port. The GRAF_PRINTER mode is defaulted to assume that all printers attached are the proper graphics type.

To allow the user full flexibility for setting up PR-256 in the desired configuration, I have included PATCH256, a patch program found in listing 4. A patch program simply prompts the user for configuration settings for a program and then probes into and updates the object code on the disk to reflect these settings. Anytime you change the printer configuration of your system, you can rerun PATCH256 (making sure that the disk containing PR-256 is not write protected) to reflect the new setup.

The PREV_ESC mode is set by PR-256 anytime an ESC Control character (ASCII 27) is received. (Remember that ASCII 27 is considered as a Control character only when PR-256 is in the "Pass-em thru" mode.) When the ESC character is sent to the printer, it acts as a wake-

www.americanradiohistory.com

The Ledger

Westware

NO SURPRISE

The best type of surprise when you buy accounting software is no surprise. Why re-learn accounting procedures just because you are going to a computer?

If you have been keeping ledgers by hand, then you have probably used subsidiary journals such as cash disbursements, sales, as well as general journal, because they provide an organized way of keeping track of accounts.

It is no surprise, then that THE LEDGER also offers you the four most popular subsidiary journals: Cash Disbursements, Cash Receipts, Sales, Purchases, PLUS a General Journal. Add to that a Repeating Journal for reoccurring entries like rent.

The documentation and self-instructional cassette tape will have you running in a few hours.

With you and THE LEDGER, it is NO SURPRISE — you will be organized!

2455 S.W. 4th Ave.
Ontario, OR 97914
(503) 881-1477

Formance series

Circle 454 on inquiry card.

NEW

Systems II Ex

Turningpoint Series

- General Ledger
- Payroll
- Inventory
- Accounts Receivable
- Accounts Payable
- Data Base

A totally integrated accounting system featuring Departmental P & L, Budget Reporting and P.O.S., Check Writing, Invoices and Statements. Job Costing and Client Billing also available.

Standard features such as: check writing for payroll and payables. Receivables prints invoices and statements. Available on floppy or hard disk. Compatible with the APPLE® II and ACE 1000.

See your dealer today or contact:

Westware
Turningpoint Series
Systems II Ex
Turningpoint Series
Westware
Turningpoint Series
Westware
Systems II Ex
Turningpoint Series
Westware
Systems II Ex
Turningpoint Series
Westware
Systems II Ex

up signal to the printer. It tells the MX-100, "Hey you, the next character you receive is going to change some operational mode."

The printer does not print out a character upon receipt of an ESC character; rather it enters an "Escape sequence receiving" mode. The next character or characters will be interpreted as Control characters and used to change some operational characteristic of the MX-100. The remaining modes mentioned above reflect different actions that PR-256 must take in response to some of these different escape sequences.

PR-256 must make sure that it distinguishes between a code sent to the Epson as an escape sequence or as a normal printing character. If the character is part of an escape sequence, PR-256 must not do any processing with that character. For example, if the code normally refers to a Graphics character, PR-256 had better not try sending 12 data bytes to the printer instead of the character value.

This means that PR-256 must retain a certain amount of knowledge of which characters have been received by any given printer. Because PR-256 will get only one character at a call, it must have the ability to store the knowledge that certain escape sequences are in the process of being sent to the printer.

PR-256 sets the PREV_ESC mode whenever it spots an ESC Control character. On the next call to print out a character, PR-256 will examine the character to determine what type of escape sequence is being sent. Depending on the particular escape sequence, different courses of action must be taken.

The ESC_SINGLE, ESC_NULL, and ESC_C modes are set by PR-256 for certain escape sequences to indicate how many more Control characters to expect. These modes do not require any action from PR-256 other than transmitting the proper number of control bytes to the printer.

ESC_SINGLE tells PR-256 to expect one more control byte. This mode is the result of ESC "A," ESC "Q," and ESC "N" sequences received by PR-256. These all send some sort of parameter byte that PR-256 is to send directly to the MX-100.

ESC_NULL tells PR-256 to send all bytes to the printer as Control characters until a NUL character (ASCII 0) is seen. The transmission of the NUL will put PR-256 back into normal printing mode. This mode is entered from ESC "D" and ESC "B" sequences.

ESC_C is set when an ESC "C" sequence is sent through PR-256. This indicates that one more byte will be a control byte unless that additional byte is equal to 0. If it is equal to 0, PR-256 should expect an additional byte after that.

The BIT_GRAF, FST_BITG, and SEC_BITG modes are related. When PR-256 receives an ESC "K" or ESC "L" sequence, it knows that the user is setting the printer into one of two bit-image modes. This escape sequence specifies that the user also send a 2-byte count of the number of byte values that the Epson is to interpret as bit-image codes. FST_BITG and SEC_BITG are used to tell PR-256 to expect the 2 consecutive bytes that form the count.

When the user puts the MX-100 into bit-image mode, all the characters sent to the printer in that mode are to be sent directly to the printer by PR-256. In other words, a code that normally refers to a Graphics character is not to be processed as such; instead, the given code should be relayed to the printer. This means that PR-256 must determine the number of characters that will be sent to the printer in the bit-image mode. PR-256 does this and then decrements the count for every character received until the count hits 0. At that point, the printer and PR-256 both revert back to normal printing modes.

The last mode is the NEW_INTL mode. This is set whenever PR-256 receives an ESC "R" sequence. This signals PR-256 that the printer is be-

TriSoft has CP/M-68K for the TRS-80 Model 16

And It's Available Today!

TriSoft introduces the CP/M-68K operating system for the Radio Shack Model-16 and Model-II Enhanced computers. This addition to the CP/M family adds the speed and power of the 16/32-bit MC68000 under CP/M-68K while maintaining compatibility with the vast library of CP/M 2.2 software.

- Runs in conjunction with CP/M 2.2
- Easy context switching between 2.2 and 68K
- Z80 acts as I/O slave under CP/M-68K
- Selection of support utilities provided
- 68000 assembler provided
- Industry standard C compiler provided

TriSoft
4102 Ave.G
Austin, Texas
78751
1-512-445-5580

1-800-531-5255 Ext.784
(In Texas call 1-800-252-9146 Ext.784)

VISA MasterCard

- CP/M, CP/M 2.2, CP/M-68K TM Digital Research
- TRS-80 Model 16 and Model II TM Radio Shack/Tandy
- 68000 TM Motorola
- Z80 TM Zilog

Circle 432 on inquiry card.

www.americanradiohistory.com

TO ORDER CALL:
1-800-451-2502
617-641-1241

Technical Support
617-641-1235

SoftwareBanc
661 Massachusetts Ave, Arlington, Ma. 02174

So, what good is your IBM® Personal Computer anyway? Yours is the only computer that can run...

1-2-3

One program combining three essential productivity tools:
Spreadsheet Information Management Graphics
for only $495!

"We are determined to provide the same level of support for 1-2-3™ that has made SoftwareBanc the nation's leading dBASE II™ dealer."
Adam B. Green
President
SoftwareBanc

1-2-3 is a registered trademark of Lotus Development Corporation
dBASE II is a registered trademark of Ashton-Tate, Inc.
IBM Personal Computer is a registered trademark of International Business Machines
Payment may be made by: MasterCard, Visa, check, money order.
Mass. residents please add 5% sales tax. Add $5.00 for shipping and handling.
Circle 397 on Inquiry card.

www.americanradiohistory.com

ing set into a new international-character-set mode. PR-256 must intercept the mode being sent and store it for its own use. We can see the need for this if we recall how PR-256 prints out International character types.

Remember that PR-256 will temporarily change the printer's international set to print out characters in the International group. After the printing, PR-256 will restore the printer's set to what it had been previously. Thus, using the NEW_INTL mode, PR-256 can intercept and save the mode being sent and then send the mode to the MX-100.

Conclusion

As a conclusion, I will quickly mention the steps involved in setting up PR-256 to run with your system. First, you must type in, assemble, and link the program as found in listing 5. Next, you must set up AUTOEXEC.BAT to load in PR-256 on system start-up.

The AUTOEXEC.BAT file can be set up using an editor (like EDLIN supplied with DOS) or, because the file is very short, using the DOS copy command. To use the copy command, you must be under DOS control. Simply type in "COPY CON: AUTOEXEC.BAT<ENTER>". This tells DOS to copy from the console (keyboard) into the AUTOEXEC.BAT file. You will not get any prompt back after the <ENTER> key is hit. Now, type "PR-256<ENTER>" followed by "DATE<ENTER>". End the copy session by pressing the F6 function key. DOS will save your keyboard entries into the new AUTOEXEC.BAT file and return with the normal prompt.

The next time you start up the IBM with this disk in the default drive, DOS will load PR-256 and prompt you for the current date. That is all there is to setting up PR-256.

It will be necessary for you to put copies of PR-256.EXE and the AUTOEXEC.BAT files on any system disk that you intend to boot off of. If for some reason you do not want DOS to load PR-256 for some system start-up, simply press CTRL-BREAK after you hear the power-on beep. This prevents DOS from processing the contents of AUTOEXEC.BAT.

Good luck and good printing. ■

For those readers interested in obtaining a running version of PR-256, I have arranged to make it available for purchase. The disk contains the PR-256 source listing, the assembled and linked (ready-to-run) object code, the patch program discussed in the article, and a sample BASIC program using the different modes of PR-256. The program is fully revised to work with both Graftrax-Plus and Graftrax printers. The cost of this disk is $25. A program called NUCHAR, available for $10 extra, allows you to customize as many as 128 of PR-256's printing characters. User's manuals are included with each order. Please include $1.50 for shipping in the U.S., Canada, and Mexico ($5 elsewhere) plus sales tax in California. Send orders to Field Computer Products, 909 North San Antonio Rd., Los Altos, CA 94022, (415) 949-3457. Visa and Mastercard accepted.

Listing 5: *The complete assembly-code listing of PR-256. Note that this program works only with Epson printers equipped with the Graftrax graphics option, not with the newer Graftrax-Plus option.*

```
                        PAGE
                        PAGE 64,132
                        TITLE PR256 - IBM CHAR SET FOR MX100 by Tim Field

                        ;*************************************************************
                        ;
                        ;  PR256...Copyright by Tim Field, 1982
                        ;
                        ; IBM CHARACTER SET - This program resides on the IBM personal
                        ;   computer.  All 256 of the characters used by the IBM will
                        ;   be available to be printed out using the MX100 or MX80 with
                        ;   graphics option.  The non-standard characters are printed
                        ;   automatically by any process or program executing the IBM
                        ;   interrupt #17H (normal print routine in BIOS).
                        ;
                        ;*************************************************************



                        ;************************
                        ;
                        ;  DEFINE CONSTANTS USED BY PROGRAM
                        ;
                        ;************************

= 005C                      INTADDR   EQU  017H * 4      ; Address to interrupt vector addr
= 0027                      NEWINT    EQU  027H         ; DOS interrupt code for "End but stay resident"
= 001B                      ESC_CHAR  EQU  1BH          ; ASCII escape character
= 0000                      NUL       EQU  0            ; ASCII NUL character


                          ;
                          ; Define mask bytes used to turn on and off SYS_MODE for each printer
                          ;
= 00FE                      MASK$BIT_GRAF  EQU  11111110B ; Printer in bit-graphics mode
= 00FD                      MASK$SEC_BITG  EQU  11111101B ; Next char is 2nd graf char count
= 00FB                      MASK$FST_BITG  EQU  11111011B ; Next char is 1st graf char count
= 00F7                      MASK$NEW_INTL  EQU  11110111B ; Next char international char defn
= 00EF                      MASK$ESC_SING  EQU  11101111B ; Expect one more control char
= 00DF                      MASK$ESC_NULL  EQU  11011111B ; Expect control chars until NUL found
= 00BF                      MASK$ESC_C     EQU  10111111B ; One more control char if non-zero, else 2 more
= 007F                      MASK$PREV_ESC  EQU  01111111B ; Next char is escape defn char


                          ;
                          ; Define structure used to hold each of the three (possibly existing)
                          ; printers.
                          ;
                            PRINTERS STRUC
0000  00                        SYS_MODE      DB  0   ; Stores bits pertaining to current printer mode
0001  0000                      GRAF_CNT      DW  0   ; No bit count of graphics chars...for bit-graf mode
0003  00                        FULL_INSTR    DB  0   ; >0 : CR/LF mode, =0 : No control codes, <0 : normal
0004  00                        GRAF_PRINTER  DB  0   ; <>0:Printer has Epson graphics, =0:No
0005  00                        INTLSET       DB  0   ; 0-7 value of current international set for Epson
0006                        PRINTERS ENDS


                        ;************************
                        ;
                        ;  Define a temporary stack.  Required for initialization
                        ;  of program only.
                        ;
                        ;************************

0000                    STACK SEGMENT PARA STACK
0000  0A [                  DB  10 DUP('STACK   ')
          53 54 41 43
          4B 20 20 20
      ]
                        STACK ENDS

0050
```

Listing 5 continued on page 362

www.americanradiohistory.com

Stay in touch with the world anywhere you go.

Plug into the largest information banks ever compiled, with the inexpensive and easy-to-use RCA Videotex Terminal.

Electronic news . . . stock market updates direct to home or office . . . published articles . . . government and industry reports . . . electronic mail . . . there's hardly anything going on, anywhere in the world, that can't be captured by giant computers, ready to be examined at the touch of a button. But until recently, these vast resources were available only to a select few: those having access to the largest computers and the skill to use them.

Suddenly, that's all changed. Now the information of the world is available to anyone who can tap out a few words on a keyboard. The reason: an extraordinary piece of portable equipment that weighs less than six pounds, takes no special training to operate, and gives you instant access to the world's major information and communication services.

The RCA VP3501 Videotex Terminal.

With the VP3501, you don't need a personal computer. If you have a telephone and a TV set, you have everything you need to get in touch with the incredible range of services at CompuServe, The Source, the Dow Jones News/Retrieval Service and others.

The world of videotex.

A subscription to such services gives you ready access to literally thousands of "menu" selections covering subjects of vital interest.

- Read electronic editions of important newspapers and magazines, right on your TV screen . . . national and international news . . . weather, sports . . . direct from the newswires.
- Research almost any subject in depth . . . with published articles . . . government and industry reports . . . other authoritative sources.
- Keep up with the world of finance . . . latest stock market prices . . . commodity reports . . . market and business commentaries . . . detailed information on thousands of publicly held companies.
- Send and receive electronic mail with other subscribers nationwide, including private person-to-person communication at less cost than a long distance phone call.
- Bank and shop at home . . . choose from thousands of electronically catalogued items . . . made available at discounted prices.
- Enjoy a wide selection of home services, including dozens of challenging games to test your family's playing skills.

Quick and easy start-up.

The VP3501 is as easy to use as a video game. Just follow the easy-to-understand instructions you get in the User's Guide. Connect the VP3501 to your phone and TV set, turn it on, touch a few keys, and you're in direct contact with a whole new world of information.

Other VP3501 applications.

The VP3501 may also allow you to communicate with your company or school computer, in addition to the many subscription services available. There are expansion interfaces for a printer and cassette recorder. These features can provide you with hard copy and a full cassette of downloaded information for review off-line, at your convenience. You can even write and run your own programs on host computers. In addition to the built-in direct connect modem and RF modulator, the VP3501 has 58-key alphanumeric and 16-key calculator keypads . . . resident and user-definable character sets. Color-locking circuitry provides sharp graphics . . . and there are programmable tones from a white noise generator.

Order now: only $399.

We know of no comparable videotex data terminal available today at this low price. The VP3501 terminal comes with basic cables and connections for your TV set and telephone (with certain phones, the optional RCA acoustical coupler may be necessary), and the illustrated User's Guide with comprehensive instructions. Order now and you'll also get a free hour of connect time from CompuServe, The Source and the Dow Jones News/Retrieval Service. Try the VP3501 for just 10 days. If not completely satisfied, you can return it to RCA for a full refund.

Call toll-free: 800-233-0094.

In Pennsylvania, call collect to 717-393-0046. Visa and MasterCard orders are accepted by phone or mail your order direct to RCA Microcomputer Products, Dept., BY-383 , Customer Service, New Holland Avenue, Lancaster, PA 17604. Be sure to include name and shipping address, telephone, and payment: $399.00 each, plus $3.00 each shipping, plus applicable state and local taxes. Send check or money order payable to RCA Corporation. Prices and specifications subject to change without notice.

RCA

Circle 375 on inquiry card.

www.americanradiohistory.com

Listing 5 continued:

```
                                ;;;;;;;;;;;;;;;;;;;;;;;;
                                ;
                                ; Start code area''
                                ;
                                ;;;;;;;;;;;;;;;;;;;;;;;;

0000                            CODE SEGMENT
                                ASSUME CS:CODE,DS:CODE,SS:STACK,ES:NOTHING

0000                            PR25b PROC FAR
                                    ;
                                    ; Initialization code...used only once, on system startup
                                    ;
0000 E8 0783 R                      CALL INIT_CODE              ; Call initialization routine
0003 CB                             RET                         ; Return from initialization

                                ;;;;;;;;;;;;;;;;;;;;;;;;
                                ;
                                ; Define storage areas here
                                ;
                                ;;;;;;;;;;;;;;;;;;;;;;;;

0004 0000                           OWORD_ADDR DW 0,0           ; Save address to BIOS print routine here
0008 09                             TMPBYTE    DB ?             ; A multipurpose
0009 00                             PRI        PRINTERS DUP (0) ; Set aside area for three printers
000A 0000
000C 00
000D 00
000E 00

000F 00                             PR2        PRINTERS DUP (0) ;
0010 0000
0012 00
0013 00
0014 00

0015 00                             PR3        PRINTERS DUP (0) ;
0016 0000
0018 00
0019 00
001A 00

                                ;;;;;;;;;;;;;;;;;;;;;;;;
                                ;
                                ;  Start of actual print runtime code
                                ;
                                ;;;;;;;;;;;;;;;;;;;;;;;;


001B                            START_UP:     ; Start of actual print routine

001B 1E                             PUSH DS                     ; Save segment register
001C 56                             PUSH SI                     ;
001D 53                             PUSH BX                     ;
001E 51                             PUSH CX                     ;
001F 52                             PUSH DX                     ;
0020 50                             PUSH AX                     ;
0021 8C CB                          MOV  BX,CS                  ;
0023 8E DB                          MOV  DS,BX                  ;
0025 80 FC 00                       CMP  AH,0                   ; Is this to print out a char?
0028 74 06                          JE   PCHAR                  ; Br if yes
002A E8 01D4 R                      CALL PR2BYTE                ; Otherwise, just print char
002D E9 01C5 R                      JMP  DONE                   ;    and exit

0030                            PCHAR:

0030 BB 0009 R                      MOV  BX,OFFSET PRI          ; Now get offset to printer structure
0033 80 FA 00                       CMP  DL,0                   ; DX contains 0,1,2 for printer number
0036 74 08                          JE   T1                     ; Br if printer 0
0038 83 C3 05                       ADD  BX,5                   ; Move to next printer area
003B 80 FA 01                       CMP  DL,1                   ; Is it printer 1?
003E 74 03                          JE   T1                     ; Br if yes
0040 83 C3 05                       ADD  BX,5                   ; Offset to printer 2 structure

0043                            T1:

0043 80 7F 04 00                    CMP  GRAF_PRINTER[BX],0     ; Are we talking to a printer with Epson graphics?
0047 75 0E                          JNE  MORE$TO$COME           ; Send out char if not graphics printer
0049 8A 2F                          MOV  CH,SYS_MODE[BX]        ; Get system mode bits
004B D0 DD                          RCR  CH,1                   ; BIT_GRAF_MODE?
004D 73 0A                          JNC  NOT$BIT$MODE           ; Br if not
                                    ;
                                    ; We are in bit-graphics mode...decrement mode count and send character
                                    ; as is to printer.
                                    ;
004F FF 4F 01                       DEC  GRAF_CNT[BX]           ; Decrement count of graphics chars left
0052 75 03                          JNZ  MORE$TO$COME           ; Are we done with graphics mode?
0054 80 27 FE                       AND  SYS_MODE[BX],MASK$BIT_GRAF ; If yes, clear bit to indicate done

0057                            MORE$TO$COME:

0057 EB 6F                          JMP  SHORT SENDCHAR         ; Send out bit-graf mode character

0059                            NOT$BIT$MODE:

0059 80 7F 03 01                    CMP  FULL_INSTR[BX],1       ; Are we in "Full Instr Set" mode?
005D 74 0A                          JE   TO$CHKCHAR             ; Br if yes...no "control char" check
005F 7C 08                          JL   NORM_MODE              ; Br if in normal mode
                                    ;
                                    ; If reach here, we are in CR/LF mode.  The only 'printer action'
                                    ; codes expected in this mode are CR (ASCII 13) and LF (ASCII 10).
                                    ; All other ASCII values are interpreted as characters to be printed.
                                    ;
0061 3C 0D                          CMP  AL,13                  ; Is Carriage Return char?
0063 74 03                          JE   SENDCHAR               ; Send to printer if yes
0065 3C 0A                          CMP  AL,10                  ; Is Line Feed char?
0067 74 5F                          JE   SENDCHAR               ; Send to printer if yes

0069                            TO$CHKCHAR:

0069 E9 0123 R                      JMP  CHKCHAR                ; Else print character from character set

006C                            NORM_MODE:

006C D0 DD                          RCR  CH,1                   ; SEC_BITG_CNT?
006E 73 11                          JNC  NOT$SEC                ; Br if no
                                    ;
                                    ; If reach here, the current character is the second count value for
                                    ; the bit-graphics mode.  It is the high-order byte and must be added
                                    ; to the low order byte which was the previous character.
                                    ;
0070 88 47 02                       MOV  (FULL_INSTR-1)[BX],AL  ; Save Graf Cnt
0073 80 27 F0                       AND  SYS_MODE[BX],MASK$SEC_BITG ; Turn off SEC_BITG_CNT bit
0076 83 7F 01 00                    CMP  GRAF_CNT[BX],0         ; Is count equal zero?
007A 7E 4C                          JLE  SENDCHAR               ; If yes, don't set bit-graf mode
007C 80 0F 01                       OR   SYS_MODE[BX],NOT MASK$BIT_GRAF; Indicate in Bit-graf mode
007F EB 47                          JMP  SHORT SENDCHAR         ; Send out count character

0081                            NOT$SEC:

0081 D0 DD                          RCR  CH,1                   ; FST_BITG_CNT?
0083 73 0B                          JNC  NOT$FST                ; Br if not
                                    ;
                                    ; If this bit is set, it indicates that the last character printed out
                                    ; was "Start Bit Graphics mode" indication.  The current character is
                                    ; to be used as the low order byte of the count of bit-graphics characters
                                    ; to be sent.  The next character expected is the high-order byte for the
                                    ; count.
                                    ;
0085 80 27 FB                       AND  SYS_MODE[BX],MASK$FST_BITG ; Turn off FST_BITG_CNT bit
```

Listing 5 continued on page 366

www.americanradiohistory.com

The 3 reasons why our software should cost you an arm and a leg...

1. We are highly specialized and limit our production to only 7 categories: MANUFACTURER, WHOLESALER, DOCTORS, DENTISTS, CHURCHES, SCHOOLS AND FINANCIAL PACKAGES.
2. Our distribution and service network blankets the nation and spans the globe.
3. Our microcomputer software is so finely tuned and incredibly simple it will make your secretary into a computer wizard.

These are the reasons why our software should cost you a lot, and they are precisely the reasons why it won't. . .

1. Specialization increases quality but reduces research and development costs.
2. Worldwide distribution increases volume and reduces unit costs.
3. Simplicity increases effectiveness but reduces installation and operation costs.

For complete information about the microcomputer software that should cost you an arm and a leg, but doesn't, just send for our free brochure. It deals exclusively with your business or profession and it is written in very plain English. The brochure is free, and the postage is paid.

DISTRIBUTOR AND DEALER INQUIRIES ARE WELCOME.

ims

INTERNATIONAL MICRO SYSTEMS

6445 Metcalf • Shawnee Mission, KS 66202
(913) 677-1137

Circle 213 on inquiry card.

www.americanradiohistory.com

CompuShack Your Systems Specialist

IBM®

PDS UNIVERSAL PRODUCTS

IBM PC- COMPLETE LINE IBM®

IBM

PC System: includes 64K IBM-PC with 2 Floppy Disk Drives, Floppy Drive Controller, Color Graphics Card. All for only **$2999.00**

TRUMPCARD

A unique memory card with 256K Ram Game I/O and Serial I/O. . . **$499.00**

TRUMP CARD II

Serial I/O and 512K fully populated memory card **$699.00**

TRUMP CARD V

Features Parallel and Serial I/O, Game I/O and a Clock/Calander with battery back-up. A fully populated 256K memory board **$599.00**

QUADRAM

Quad Board - 256K. Parallel Port, Serial I/O, Clock Calendar with battery backup **$599.00**
512K Ram with Serial I/O. . . . **$799.00**
Microfazer Parallel **$199.00**
Microfazer Cable **$37.95**
Quad Color I. **$299.00**
Quad Color II 640 x 200. . . . **$499.00**
Quad Color III 640 x 400 . . . **$699.00**

AST RESEARCH

Combo Plus- 256K, Parallel & Serial Port, Clock Calendar W/Bat. back-up, Superdrive, Superspool . . . **$599.00**
Mega Plus- 512K, Parallel & Serial Port, Clock Calendar W/Bat. back-up **$1199.00**

MAYNARD ELECTRONICS

Floppy Disk Controller **$179.00**
Floppy Disk Controller w/Parallel Port **$229.00**
Floppy Disk Controller w/Serial Port **$239.00**

HERCULES GRAPHICS CARD

This card gives you 720 x 350 graphics capabilities and it is completely compatible with DOS software for only **$489.00**

BIG BLUE

Dual I/O ports, dual processing. Serial port. Parallel port, 5 MHZ, Z80 B, 64K. Hard disk interface, Clock/Calendar, let's you run existing CP/M® software. List **$589**. . . . . Ours **$479**

TALL TREE SYSTEMS

JRAM 512K, allows PC to address ONE MEGABYTE Electronic Disk. . . **$800 EA.**
JFORMAT lets you mix and match Drives: single/dual/quad/Electronic/8"/Hard Disk + Printspooler and 10 spector formatting. **$60.00**

FLOPPY DISK DRIVES

TANDON

TM-100-1 SS/DD **$189.00**
TM-100-2 DS/DD. **$249.00**
TM-100-4 DS/DD. **$359.00**
TM-848-1 SS/DD **$425.00**
TM-848-2 DS/DD. **$499.00**

SHUGART

SA400 SS/SD. **$169.00**
SA450 DS/DD. **$239.00**
SA800/801 SS/SD. **$365.00**
SA850/851 DS/DD. **$459.00**

SIEMENS

FDD 100-5 . . . . . **$159.00**
FDD 200-5 . . . . . **$199.00**

QUME

DT-5 DS/DD. **$269.00**
DT-8 DS/DD. **$469.00**

HARD DISK SYSTEMS

For IBM and Apple from
DATAMAC & CORONA

5MB. **$1595.00**
10MB. **$1995.00**
Complete subsystem with software, cables and power supply

CORVUS

5MB **$2599.00**
10MB **$3699.00**

PRINTERS

EPSON

MX-80 W/graftrax plus . . . **$439.00**
MX-80 FT W/graftrax plus . . . **$499.00**
MX-100 W/graftrax plus . . . **$659.00**

CompuShack brother

BROTHER

HR-1 A parallel **789.00**
HR-1 A serial. **$899.00**
Tractor feed option. **$135.00**

SMITH CORONA CompuShack SCM

TP-1 parallel **$579.00**
TP-1 serial **$579.00**

CompuShack NEC

NEC SPINWRITER

7710-1	$1995.00	3510	$1495.00
7715-1	$1995.00	3515	$1595.00
7730-1	$1995.00	3520	$1995.00
7720-1	$2395.00	3525	$1995.00
7725-1	$1995.00	3530	$1595.00

3550 . . . . . **$1995.00**
PC8023A . . . . . **$ 479.00**

OKIDATA

82A **$429.00**
83A **$699.00**
84AP parallel. **$999.00**
84AS serial **$1099.00**

MONITORS

AMDEK MONITORS AVAILABLE . . . . . **CALL**

NEC

JB-1201M 12" green screen **$169.00**
JC-1212M 12" color (Lo-Res). . . **335.00**
JC-1203DH (A) 12" (Hi-Res) . . . **$752.00**

ELECTROHOME

13" RGB monitor (Med-Res) . . . **$299.00**
13" RGB monitor (Hi-Res) **$549.00**

COMREX

CR-5500 12" monochrome display **$99.00**
CR-6500 13" composite color monitor **$299.00**
CR-6600 13" color RGB monitor **$499.00**

SPECIAL PRICES ARE ONLY PART OF OUR SERVICE

(714) 730-7207

*CP/M 86 is a registered trademark of Digital Research, Inc
*CP/M is a registered trademark of Digital Research, Inc.

*APPLE is a registered trademark of Apple Computers, Inc
*IBM is a registered trademark of IBM Corporation

www.americanradiohistory.com

Sales and Service: Business & Home Computers
Prices subject to change without notice

(714) 730-7207

CABINETS/POWER SUPPLY
Dual 8" disk drive cabinet/ps. $249.00
Dual 5¼" disk drive cabinet/ps. $99.00
Single 5¼" disk drive cabinet/ps. $69.00
2 single side double density 8" disk drives, cabinet/power supply $895.00

Apple II+ Computer System with 48K of memory, 2 "data Drive" disk drives, controller card, 12" green screen hi-contrast monitor. All cables and manuals are included for a CompuShack price of $1699.00

For the same system listed above with a 16K card, Z80 card and an 80 Column card add. $351

OTHER PRODUCTS FOR APPLE II

Special of the Month!

PDS DATA DRIVE®
100% Compatible disk drive w/controller for Apple II +.

$299.00
SUGGESTED RETAIL PRICE . . . $429.00

APPLETTE 1 (Slimline drive for Appleii+ $339.00

PDS UNIVERSAL
Z80 card CP/M® included . . $159.00
80 column card $179.00
Disk drive controller card W/ diagnostics software $99.00
Disk drive controller $79.00

HAYES MICROCOMPUTER PRODUCTS
Micromodem II. $299.95
Smartmodem 1200 baud full duplex. $529.95
Micromodem II manual/diskette $15.00

*DATA DRIVE is a registered trademark of PDS Universal, Inc.
*PDS is a registered trademark of Professional Data Systems, Inc

Parallel Printer Card $69.00
PRT-1 with cable $75.00
PRT-1 with EPSON 80/100 screen dump graphics with cable, Grafitti card $99.00
16K Ram card $69.00
128K Ram card w/DOS 3.3 disk emulator $369.00
Grappler Interface Card $99.00

R. H. ELECTRONICS
Super fan II and one outlet $59.95
Super fan II W/Zener Ray and two outlets $79.00

T G PRODUCTS
Game paddles $29.95
Joy stick. $45.95
Select a port $45.95

STREET ELECTRONICS
ECHO II speech synthesizer . . . $175.00

OTHER PRODUCTS FOR IBM

MODULE CONVERTIONS FOR YOUR IBM-PC

Z-80 Card-Will put PC in touch with 20,000 existing programs **CALL**
8086-Lets your IBM run 3 to 4 times faster . . . . . **CALL**
68000-Converts PC to 32 bit Architecture and UNIX III. It transforms PC to a powerful cost effective Commercial Engineering work station . . . . . **CALL**
80286-A multi-user expansion provides cost effective benefits . . . . . **CALL**
16032-This micro-card offers VAX like functionality and architecture to PC . . . . . **CALL**
UNIX/XENIX™-XENIX on IBM-PC . . . . . **CALL**
PC Versa Card-512K Memory Card provides user flexibility to run on time tested Software available on any of the chosen processors . . . . **CALL**

SINCLAIR/TIMEX PRODUCTS

MEMOTECH PRODUCTS
16K Memopack . . . . . $ 59.00
32K Memopack . . . . . $ 99.00
64K Memopack $169.00
Memopack High Res. Graphics . . . $139.00
Memopack Centronics Parallel interface $139.00

KAYPRO II COMPUTER SYSTEM
64K Ram, Perfect Writer, Perfect Filer, Perfect Speller, Perfect Calc, S-Basic, CP/M® version 2.2, two disk drives, 9" (green) monitor, RS232 interface, Parallel Printer interface, and Weatherproof carrying case $1699

FRANKLIN ACE 1000 COMPUTER SYSTEM
64K Ram, Upper and Lower case letters, 12 Key numeric, Alpha Lock, Visicalc Keys, Two "Data Drives" and Controller, 12" (green) monitor $1699
Color Card add $59

DEC Rainbow 100
Keyboard, CPU, Z-80/8088, 64K, Serial RS232 Port, 2 X-400KB disk (x-400) drives, Monitor, CP/M86®/80 Software . . . . . **Visit our store for Price!**

WE'RE OPENING RETAIL STORES THROUGHOUT THE U.S.A. **SOON!**

COMPUSHACK

FRANCHISE INQUIRES WELCOME

CALL YOUR LOCAL COMPUSHACK DEALERS:

California	Anaheim	•
	Concord	•
	La Mirada	(213) 947-9505
	Newport Beach	•
	San Diego	(714) 457-2149
	San Jose	(408) 973-1444
	Tustin	(714) 730-7207
	Walnut Creek	(415) 945-8011
	West L.A.	(213) 340-7000
	Woodland Hills	(213) 888-0030
Colorado	Denver	(303) 422-3925
Idaho	Twin Falls	•
Illinois	Chicago	(312) 964-4612
Montana	Great Falls	•
	Missoula	(406) 721-1811
New York	Albany	•
	Rochester	•
	Rome	(315) 336-0266
Texas	Austin	(512) 258-1062
Washington	Richland	•
	Spokane	•
Wisconsin	Verona	(608) 845-7110
Canada	Toronto	•
U.K.	London	01-935-0480

Headquarters Telex: 181667
Answer Back COMPDSHAK TSTN

ALL FLOPPIES REPAIRED QUICKLY AT LOW COST

Circle 360 on inquiry card.

www.americanradiohistory.com

Listing 5 continued:

```
0098  80 0F 02              OR   SYS_MODE(BX),NOT MASK$SEC_BITG; Turn on SEC_BITG_CNT bit
0089  89 47 01              MOV  GRAF_CNT(BX),AX          ; Save low order count
009E  EB 39                 JMP  SHORT SENDCHAR           ; Send count to printer

0090                    NOT$FST:

0090  D0 DD                 RCR  CH,1                     ; NEW_INTL?
0092  73 10                 JNC  NOT$INTL                 ; Br if not
                            ;
                            ; If this bit is set, it indicates that we previously saw request for a
                            ; new "International" character set to be used.  The current byte is
                            ; expected to be a value from 0 to 7 indicating the set to be used.  If
                            ; an error is found, no set change is accomplished.
                            ;
0094  3C 00                 CMP  AL,0                     ; Is current char less than 0?
0096  7C 07                 JL   NOT$VALID                ; Br if yes
0099  3C 07                 CMP  AL,7                     ; Is it greater than 7?
009A  7F 03                 JG   NOT$VALID                ; Br if yes
                            ;
                            ; If reach here, have valid set...update in memory
                            ;
009C  99 47 05              MOV  INTLSET(BX),AL           ;

009F                    NOT$VALID:

009F  80 27 F7          -   AND  SYS_MODE(BX),MASK$NEW_INTL ; Clear NEW_INTL bit
00A2  EB 24                 JMP  SHORT SENDCHAR           ; Send out value to printer

00A4                    NOT$INTL:

00A4  D0 DD                 RCR  CH,1                     ; ESC_SINGLE mode?
00A6  73 05                 JNC  NOT$ESC_SING             ; Br if not
00A8  80 27 EF              AND  SYS_MODE(BX),MASK$ESC_SING  ; Turn off ESC_SINGLE mode
00AB  EB 18                 JMP  SHORT SENDCHAR           ; Send char to printer

00AD                    NOT$ESC_SING:

00AD  D0 DD                 RCR  CH,1                     ; ESC_NULL mode?
00AF  73 09                 JNC  NOT$ESC_NULL             ; Br if not
00B1  3C 00                 CMP  AL,NUL                   ; Is this a NUL character?
00B3  75 13                 JNE  SENDCHAR                 ; If not, print out character
00B5  80 27 DF              AND  SYS_MODE(BX),MASK$ESC_NULL  ; Otherwise, turn off ESC_NULL mode first
00B9  EB 0E                 JMP  SHORT SENDCHAR           ;

00BA                    NOT$ESC_NULL:

00BA  D0 DD                 RCR  CH,1                     ; ESC_C mode?
00BC  73 10                 JNC  NOT$ESC_C                ; Br if not
00BE  3C 00                 CMP  AL,NUL                   ; Is character NUL?
00C0  75 03                 JNE  NOT$NUL                  ; Skip next if not
00C2  80 0F 10              OR   SYS_MODE(BX),NOT MASK$ESC_SING ; Expect one more control char

00C5                    NOT$NUL:

00C5  80 27 BF              AND  SYS_MODE(BX),MASK$ESC_C  ; Turn off ESC_C mode

00C9                    SENDCHAR:               ; Print out current character and return

00C9  E8 01CE R             CALL PRBYTE                   ; Call print routine
00CC  E9 01C5 R             JMP  DONE                     ; Go to end

00CE                    NOT$ESC_C:

00CE  D0 DD                 RCR  CH,1                     ; PREV_ESC mode?
00D0  73 40                 JNC  NOT$ESC                  ; Br if not
                            ;
                            ; If PREV_ESC bit is set, it indicates that the last character seen by
                            ; this printer was an "Escape" code.  We will now look and see if it is
                            ; a control code that we need to remember.  These are:
                            ;
                            ;       ESC "L" - Puts printer in dual density bit graphics mode
                            ;       ESC "K" - Puts printer in single density bit graphics mode
                            ;       ESC "R" - Selects an international character set in printer
                            ;
                            ;
                            ; In addition to the codes that we need to remember, we have some
                            ; codes which set a temporary mode.  These temporary modes are:
                            ;
                            ;     "ESC_SINGLE"  : Expect one more control code.  This is to be
                            ;                     sent to the printer.
                            ;     "ESC_NULL"    : Expect control codes to continue until a NUL
                            ;                     character (ASCII 0) is received.
                            ;     "ESC_C"       : Expect one more control code.  If that code is
                            ;                     an ASCII 0, expect one more after that.
                            ;
                            ; The escape sequences which set these modes are:
                            ;
                            ;     ESC "A" - ESC_SINGLE mode
                            ;     ESC "D" - ESC_NULL mode
                            ;     ESC "Q" - ESC_SINGLE mode
                            ;     ESC "B" - ESC_NULL mode
                            ;     ESC "C" - ESC_C mode
                            ;     ESC "N" - ESC_SINGLE mode
                            ;
00D2  80 27 7F              AND  SYS_MODE(BX),MASK$PREV_ESC  ; Turn off PREV_ESC mode bit
00D5  3C 4C                 CMP  AL,'L'                   ; CTRL-L?
00D7  74 04                 JE   SET$BIT_GRAF             ; Br if yes
00D9  3C 4B                 CMP  AL,'K'                   ; CTRL-K?
00DB  75 05                 JNE  ARND$BIT_GRAF            ; Br if not

00DD                    SET$BIT_GRAF:

00DD  80 0F 04              OR   SYS_MODE(BX),NOT MASK$FST_BITG; Indicate that next char is FST_BITG_CNT
00E0  EB E6                 JMP  SHORT SENDCHAR           ; Done, send out

00E2                    ARND$BIT_GRAF:

00E2  3C 52                 CMP  AL,'R'                   ; CTRL-R?
00E4  75 05                 JNE  NOT$INT                  ; Br if not
00E6  80 0F 09              OR   SYS_MODE(BX),NOT MASK$NEW_INTL; Indicate next char is NEW_INTL bit
00E9  EB DD                 JMP  SHORT SENDCHAR           ; Send out character

00EB                    NOT$INT:

00EB  3C 41                 CMP  AL,'A'                   ; ESC A?
00ED  74 09                 JE   DO$ESC_SINGLE            ; Br if yes
00EF  3C 51                 CMP  AL,'Q'                   ; ESC Q?
00F1  74 04                 JE   DO$ESC_SINGLE            ; Br if yes
00F3  3C 4E                 CMP  AL,'N'                   ; ESC N?
00F5  75 05                 JNE  NOT$SINGLE               ; Br if not ESC_SINGLE mode

00F7                    DO$ESC_SINGLE:                    ; Set ESC_SINGLE mode

00F7  80 0F 10              OR   SYS_MODE(BX),NOT MASK$ESC_SING;
00FA  EB CC                 JMP  SHORT SENDCHAR           ; Print out char

00FC                    NOT$SINGLE:             ; Check for ESC_NUL mode now

00FC  3C 44                 CMP  AL,'D'                   ; ESC D?
00FE  74 04                 JE   DO$ESC_NULL              ; Br if yes
0100  3C 42                 CMP  AL,'B'                   ; ESC B?
0102  75 05                 JNE  NOT$NULL                 ; Br if not ESC_NULL mode

0104                    DO$ESC_NULL:            ; Set ESC_NULL mode

0104  80 0F 20              OR   SYS_MODE(BX),NOT MASK$ESC_NULL ;
0107  EB BF                 JMP  SHORT SENDCHAR           ; Print out char

0109                    NOT$NULL:               ; Check for ESC_C mode now

0109  3C 43                 CMP  AL,'C'                   ; ESC C?
010B  75 05                 JNE  NOT$ESCC                 ; Br if not
010D  80 0F 40              OR   SYS_MODE(BX),NOT MASK$ESC_C  ; Set ESC_C mode bit
```

Listing 5 continued on page 368

www.americanradiohistory.com

Circle 184 on Inquiry card. ⟶

FRANKLIN'S BAKER'S DOZEN!

13 Good Reasons to Buy the ACE 1200

1. Apple® II-compatible
2. CP/M®-compatible
3. 128K of RAM
4. Built-in floppy disk drive
5. Disk controller
6. 80 column card
7. Serial interface
8. Parallel interface
9. Upper and lower case
10. VisiCalc® keys
11. Cursor control pad
12. Numeric pad
13. Auto repeat keys

Extras can more than double the price of your personal computer. Not so with the Franklin ACE 1200. It's the professional computer system that includes the extras—and a long list of exclusive Franklin features that make it the most extraordinary value on the market today.

The ACE 1200 has everything you'll need to add a color or black and white monitor, modem, printer, back-up disk drive and other accessories. You can choose from the enormous selection of Apple programs and peripherals because the ACE 1200 is hardware- and software-compatible with the Apple II. And, with the built-in CP/M card, you can run both Apple II and CP/M programs. Franklin's CP/M operates three times as fast as many competing systems, drastically reducing processing time for most business applications.

The Franklin ACE 1200—the most extraordinary value on the market today. Call or write today for the name of your local authorized Franklin dealer.

Franklin ACE is a trademark of Franklin Computer Corporation.
Apple is a registered trademark of Apple Computer Inc.
CP/M is a registered trademark of Digital Research Inc.
VisiCalc is a registered trademark of Visi Corp.

FRANKLIN
COMPUTER CORPORATION

7030 Colonial Highway, Pennsauken, NJ 08109 609-488-1700

www.americanradiohistory.com

Listing 5 continued:

```
0110                    NOT$ESC:            ; Do not care what type of char this is...print it
0110  EB B6                 JMP  SHORT SENDCHAR

0112                    NOT$ESC:            ; Previous character was not an ESCAPE control char
                            ;
                            ; Is this an ESCAPE code?
                            ;
0112  3C 1B                 CMP  AL,ESC_CHAR            ;
0114  75 05                 JNE  NESC                   ; Br if not
0116  80 0E 80              OR   SYS_MODE[BX],NOT MASK$FREV_ESC; Set escape found bit
0119  EB A0                 JMP  SHORT SENDCHAR         ; Send out character

011B                    NESC:

                            ;
                            ; See if we have any standard control codes...ASCII 7 - 20
                            ;
011B  3C 07                 CMP  AL,07H                 ; Is character less than 7?
011D  7C 04                 JL   CHKCHAR                ; Br if yes, not control code
011F  3C 14                 CMP  AL,14H                 ; Is character greater than 14H?
0121  7E A5                 JLE  SENDCHAR               ; If not, is a control code...print it

0123                    CHKCHAR:
                            ;
                            ; Here we check to see if the character to be printed is in the range
                            ; of 20H to 7EH (ASCII value of the character to be printed.)  If in
                            ; that range, use standard Epson character set.  Otherwise, we have
                            ; a special character to print.
                            ;
0123  B4 00                 MOV  AH,0                   ; Make sure nothing is in upper byte
0125  3D 0020               CMP  AX,20H                 ; Is character less than 20H?
0128  7C 07                 JL   BIT$CHAR               ; Br if yes, special character
012A  3D 007E               CMP  AX,7EH                 ;
012D  7E 99                 JLE  SENDCHAR               ; Not a special character, just print it
012F  2C 5F                 SUB  AL,7EH-20H+1           ; Subtract non-special character set out

0131                    BIT$CHAR:


                            ;
                            ; See if current character is part of the Epson's international character
                            ; set.  (If its offset into BITTYP array is 0, international.
                            ;
0131  53                    PUSH BX                     ; Save offset to storage area
0132  50                    PUSH AX                     ; Save current character
0133  8B D8                 MOV  BX,AX                  ;
0135  B1 03                 MOV  CL,3                   ; Shift count
0137  D2 E8                 SHR  BL,CL                  ; Shift lower three bits from AL
0139  8A 8F 079E R          MOV  CH,BITTYP[BX]          ; Get byte containing type bit
013D  D2 E3                 SHL  BX,CL                  ; Move AL back to original position
                            ; Note: we have now lost the lower three bits from AL.
013F  F7 DB                 NEG  BX                     ; Take two's complement of BL
0141  02 D8                 ADD  BL,AL                  ; Add original contents of AL to negated
                                                        ;   value to get right three bits
0143  FE C3                 INC  BL                     ; This is now our index to type bit
0145  8A C8                 MOV  CL,BL                  ; Let's use value as shift count
0147  F6 26 0008 R          MUL  TMPBYTE                ; Offset into array
014B  8B F0                 MOV  SI,AX                  ; Get index into array
014D  58                    POP  AX                     ; Once again, get original char
014E  D2 E5                 SHL  CH,CL                  ; Recall CH holds bit-type byte
0150  72 3B                 JC   DO$BIT_GRAF            ; Carry now is type of the char
                            ;
                            ;  Well, we see that the bit type was 0, so we are to specify a character
                            ;  from the Epson international character set.  To determine which, we
                            ;  expect the first byte in BITVAL array to tell us which international
                            ;  set to use and the second byte to tell us the character to print.
                            ;
0152  8A AC 01F5 R          MOV  CH,BITVAL[SI]          ; Get character set
0156  38 6F 05              CMP  INTLSET[BX],CH         ; Is this the set we are now using?
0159  75 0B                 JNE  NEW$INTSET             ; Br if not
```

```
015B  58                    POP  BX                     ; Keep stack clean
015C  8A B4 01F6 R          MOV  AL,BITVAL[SI+1]        ; If yes, just send out character
0160  E9 00C8 R             JMP  SENDCHAR               ;

0163                    NEW$INTSET:         ; Must temporarily set up new international set

0163  B0 1B                 MOV  AL,ESC_CHAR            ; Print out "Esc" char
0165  E8 01CE R             CALL PRBYTE                 ;
0168  B0 52                 MOV  AL,'R'                 ; Send out new international signal
016A  E8 01CE R             CALL PRBYTE                 ;
016D  8A C5                 MOV  AL,CH                  ; Print out character set to use
016F  E8 01CE R             CALL PRBYTE                 ;
0172  8A B4 01F6 R          MOV  AL,BITVAL[SI][1]       ; Get intl character to print
0176  E8 01CE R             CALL PRBYTE                 ;
0179  B0 1B                 MOV  AL,ESC_CHAR            ; Now restore original character set
017B  E8 01CE R             CALL PRBYTE                 ;
017E  B0 52                 MOV  AL,'R'                 ;
0180  E8 01CE R             CALL PRBYTE                 ;
0183  5B                    POP  BX                     ; Restore address to store area
0184  8A 47 05              MOV  AL,INTLSET[BX]         ; Set type
0187  E8 01CE R             CALL PRBYTE                 ;
018A  E9 39 90              JMP  DONE                   ; We are done so exit program

018D                    DO$BIT_GRAF:        ; Special bit-graphics mode

018D  5B                    POP  BX                     ; Restore to keep stack straight
018E  50                    PUSH AX                     ; Save current character for indexing
018F  B0 1B                 MOV  AL,ESC_CHAR            ; Put printer in dual density bit mode
0191  E8 01CE R             CALL PRBYTE                 ;
0194  B0 4C                 MOV  AL,'L'                 ;
0196  E8 01CE R             CALL PRBYTE                 ;
0199  B0 0C                 MOV  AL,12                  ; Each graphics character consists of
019B  E8 01CE R             CALL PRBYTE                 ;   exactly 9 columns of bits followed
019E  B0 00                 MOV  AL,0                   ;   by 3 blank columns (12 columns total)
01A0  E8 01CE R             CALL PRBYTE                 ;
01A3  58                    POP  AX
01A4  3D 0054               CMP  AX,0B3H-(7EH-20H+1)    ; See if in extended set
01A7  7C 0F                 JL   NON_EXTND              ; Br if not
01A9  3D 0081               CMP  AX,0E0H-(7EH-20H+1)    ;
01AC  7D 0A                 JGE  NON_EXTND              ;
                            ;
                            ; The character is in the "extended" set. (ASCII 176 to 223)
                            ;
01AE  8A B4 01F5 R          MOV  AL,BITVAL[SI]          ; Pre-extend first column
01B2  E8 01E4 R             CALL PR9BYTS                ; Print out character
01B5  EB 08 90              JMP  AROUND                 ; Move around non-extended set

01B8                    NON_EXTND:      ; Character is non-extended

01B8  B0 00                 MOV  AL,0                   ; First column is blank
01BA  E8 01E4 R             CALL PR9BYTS                ; Print out character
01BD  B0 00                 MOV  AL,0                   ; Last two columns are blank

01BF                    AROUND:

01BF  E8 01CE R             CALL PRBYTE                 ; Print out last two columns
01C2  E8 01CE R             CALL PRBYTE                 ;

01C5                    DONE:       ; Exit program

01C5  5A                    POP  DX                     ; Restore AL without disturb AH
01C6  8A C2                 MOV  AL,DL                  ;
01C8  5A                    POP  DX                     ; Restore registers
01C9  59                    POP  CX                     ;
01CA  5B                    POP  BX                     ;
01CB  5E                    POP  SI
01CC  1F                    POP  DS
01CD  CF                    IRET                        ; Return from interrupt

01CE                    PR256 ENDP      ; Done with main routine !!!
```

Listing 5 continued on page 370

www.americanradiohistory.com

Circle 499 on inquiry card. ⟶

GEMINI–
FOR PRINTER VALUE THAT'S OUT OF THIS WORLD

Over thirty years of down-to-earth experience as a precision parts manufacturer has enabled Star to produce the Gemini series of dot matrix printers—a stellar combination of printer quality, flexibility, and reliability. And for a list price of nearly 25% less than the best selling competitor.

The Gemini 10 has a 10" carriage and the Gemini 15 a 15½" carriage. Plus, the Gemini 15 has the added capability of a bottom paper feed. In both models, Gemini quality means a print speed of 100 cps, high-resolution bit image and block graphics, and extra fast forms feed.

Gemini's flexibility is embodied in its diverse specialized printing capabilities such as super/sub script, underlining, backspacing, double strike mode and emphasized print mode. Another extraordinary standard feature is a 2.3K buffer. An additional 4K is optional. That's twice the memory of leading, comparable printers. And Gemini is compatible with most software packages that support the leading printers.

Gemini reliability is more than just a promise. It's as concrete as a 180 day warranty (90 days for ribbon and print head), a mean time between failure rate of 5 million lines, a print head life of over 100 million characters, and a 100% duty cycle that allows the Gemini to print continuously. Plus, prompt, nationwide service is readily available.

So if you're looking for an incredibly high-quality, low-cost printer that's out of this world, look to the manufacturer with its feet on the ground—Star and the Gemini 10, Gemini 15 dot matrix printers.

star® micronics·inc

MAKING A NAME FOR OURSELVES

1120 Empire Central Place, Suite 216, Dallas, TX 75247

www.americanradiohistory.com

Listing 5 continued:

```
                                ;$$$$$$$$$$$$$$$$$$$$$$$$$
                                ;
                                ;     PRBYTE - Clears current value of AH and prints out character in AL
                                ;
                                ;$$$$$$$$$$$$$$$$$$$$$$$$$

01CE                            PRBYTE PROC NEAR

01CE  B4 00                         MOV  AH,0                       ; Clear out for printing w/BIOS
01D0  E8 01D4 R                     CALL PR2BYTE                    ; Do actual printout of char
01D3  C3                            RET                             ; Done

01D4                            PRBYTE ENDP



                                ;$$$$$$$$$$$$$$$$$$$$$$$$$
                                ;
                                ;     PR2BYTE - Calls IBM's BIOS print routine to print out contents of AX
                                ;
                                ;$$$$$$$$$$$$$$$$$$$$$$$$$

01D4                            PR2BYTE PROC NEAR

01D4  1E                            PUSH DS
01D5  56                            PUSH SI
01D6  9C                            PUSHF                           ; IBM print proc expects interrupt call
01D7  BE  ---- R                    MOV  SI,SEG DWORD_ADDR          ; Get segment to ROM code
01DA  8E DE                         MOV  DS,SI                      ;
01DC  BE 0004 R                     MOV  SI,OFFSET DWORD_ADDR       ; Get address to ROM code for print
01DF  FF 1C                         CALL DWORD PTR [SI]             ; Call print routine
01E1  5E                            POP  SI
01E2  1F                            POP  DS
01E3  C3                            RET                             ; Return

01E4                            PR2BYTE ENDP



                                ;$$$$$$$$$$$$$$$$$$$$$$$$$
                                ;
                                ;     PR9BYTS - Prints out a graphics character using BITVAL table below.
                                ;               On entry, AL contains byte value of first column to be printed.
                                ;               Next nine columns of character are fetched from indexing thru
                                ;               SI (which must be initialized by calling routine) into the
                                ;               BITVAL table.
                                ;
                                ;$$$$$$$$$$$$$$$$$$$$$$$$$

01E4                            PR9BYTS PROC NEAR

01E4  E8 01CE R                     CALL PRBYTE                     ; Print out first column
01E7  B9 0009                       MOV  CX,9                       ; Loop through 9 columns

01EA                            LOOP9SEND:

01EA  8A 84 01F5 R                  MOV  AL,BITVAL[SI]              ; Get next column to print
01EE  E8 01CE R                     CALL PRBYTE                     ; Print it out
01F1  46                            INC  SI                         ; Move to next column
01F2  E2 F6                         LOOP LOOP9SEND                  ; Loop until done
01F4  C3                            RET                             ; Done, return

01F5                            PR9BYTS ENDP



                                ;$$$$$$$$$$$$$$$$$$$$$$$$$
                                ;
                                ; Define characters...9 bytes per character
                                ;
                                ;$$$$$$$$$$$$$$$$$$$$$$$$$

                                .RADIX 16   ; All values are in hexadecimal

0010
01F5  00 00 00 00 00 00         BITVAL  DB  000,000,000,000,000,000,000,000  ; 0 (Decimal ASCII)
      00 00 00
01FE  3C 42 B9 A5 B5 A5             DB  03C,042,0B9,0A5,0B5,0A5,0B9,042,03C  ; 1
      B9 42 3C
0207  3C 7E 93 9B FB 9B             DB  03C,07E,093,9BH,0FBH,9BH,93,07E,03C  ; 2
      93 7E 3C
0210  60 F0 F8 7C 7E 7C             DB  060,0F0,0F8,07C,07E,07C,0F8,0F0,060  ; 3
      F8 F0 60
0219  00 10 38 7C FE 7C             DB  000,010,038,07C,0FE,07C,038,010,000  ; 4
      38 10 00
0222  10 38 38 D0 EE D0             DB  010,038,038,0D0,0EE,0D0,038,038,010  ; 5
      38 38 10
022B  00 00 30 72 FE 72             DB  000,000,030,072,0FE,072,030,000,000  ; 6
      30 00 00
0234  00 00 30 78 78 78             DB  000,000,030,078,078,078,030,000,000  ; 7
      30 00 00
023D  FF FF CF B7 B7 B7             DB  0FF,0FF,0CF,0B7,0B7,0B7,0CF,0FF,0FF  ; 8
      CF FF FF
0246  00 18 24 42 42 42             DB  000,018,024,042,042,042,024,018,000  ; 9
      24 18 00
024F  FF E7 DB BD BD BD             DB  0FF,0E7,0DBH,0BDH,0BDH,0BDH,0DBH,0E7,0FF ; 10
      DB E7 FF
0258  00 0C 12 12 12 B2             DB  000,00C,012,012,012,0B2,0CC,0E0,000  ; 11
      CC E0 00
0261  00 00 64 94 9F 94             DB  000,000,064,094,09F,094,064,000,000  ; 12
      64 00 00
026A  00 06 06 FE A0 A0             DB  000,006,006,0FE,0A0,0A0,0A0,0E0,000  ; 13
      A0 E0 00
0273  06 06 FE A0 A0 A0             DB  006,006,0FE,0A0,0A0,0A0,0AC,0AC,0FC  ; 14
      AC AC FC
027C  54 10 38 2B EE 2B             DB  054,010,038,02B,0EE,02B,038,010,054  ; 15
      38 10 54
0285  00 FE 7C 7C 38 38             DB  000,0FE,07C,07C,038,038,010,010,000  ; 16
      10 10 00
028E  00 10 10 38 38 7C             DB  000,010,010,038,038,07C,07C,0FE,000  ; 17
      7C FE 00
0297  00 00 28 6C FE 6C             DB  000,000,028,06C,0FE,06C,028,000,000  ; 18
      28 00 00
02A0  00 F2 F2 00 00 00             DB  000,0F2,0F2,000,000,000,0F2,0F2,000  ; 19
      F2 F2 00
02A9  60 90 90 FE B0 B0             DB  060,090,090,0FE,080,080,0FE,080,080  ; 20
      FE B0 B0
02B2  01 5D 00 00 00 00             DB  001,5DH,000,000,000,000,000,000,000  ; 21 $ FRANCE - 5D
      00 00 00
02BB  00 3C 3C 3C 3C 3C             DB  000,03C,03C,03C,03C,03C,03C,03C,000  ; 22
      3C 3C 00
02C4  00 01 29 6D FF 6D             DB  000,001,029,6DH,0FF,6DH,029,001,000  ; 23
      29 01 00
02CD  00 00 20 60 FE 60             DB  000,000,020,060,0FE,060,020,000,000  ; 24
      20 00 00
02D6  00 00 08 0C FE 0C             DB  000,000,008,00C,0FE,00C,008,000,000  ; 25
      08 00 00
02DF  00 10 10 10 10 7C             DB  000,010,010,010,010,07C,038,010,000  ; 26
      38 10 00
02E8  00 10 38 7C 10 10             DB  000,010,038,07C,010,010,010,010,000  ; 27
      10 10 00
02F1  00 00 38 08 08 08             DB  000,000,038,008,008,008,008,000,000  ; 28
      08 00 00
02FA  10 38 7C 10 10 10             DB  010,038,07C,010,010,010,07C,038,010  ; 29
      7C 38 10
0303  00 04 0C 1C 3C 1C             DB  000,004,00C,01C,03C,01C,00C,004,000  ; 30
      0C 04 00
030C  00 20 30 38 3C 38             DB  000,020,030,038,03C,038,030,020,000  ; 31
      30 20 00
0315  00 06 0A 12 22 12             DB  000,006,0AH,012,022,012,0AH,006,000  ; 127
      0A 06 00
031E  01 5C 00 00 00 00             DB  001,05C,000,000,000,000,000,000,000  ; 128 $ FRANCE - 5C
      00 00 00
0327  02 7D 00 00 00 00             DB  002,7DH,000,000,000,000,000,000,000  ; 129 $ GERMANY - 7D
```

Listing 5 continued on page 372

www.americanradiohistory.com

The Micromint MPX-16 Microcomputer System.

As featured on the cover of "BYTE" magazine, November 1982.
Also featured in Ciarcia's Circuit Cellar, November, December 1982 & January 1983.

These are all the tools you'll need to build the world's most powerful single board microcomputer.

The Micromint MPX-16. Put one together tonight.

Once assembled, the most useful tool will be your own imagination. The possibilities are limitless. Micromint will help you tailor the MPX-16 system to your particular needs and budget. Purchase the MPX-16 as a bare pc board, as a semi-kit with all the IC sockets, I/O connectors and discreet components wave soldered to the pc board, or as an assembled and tested unit.

- Directly boots CP/M-86 or MS-DOS.*
- Runs all CP/M-86 or MS-DOS * applications programs.

On board features.

- IBM PC bus compatible with 9 expansion slots.
- Intel 8088 16-bit microprocessor.
- Optional Intel 8087 math coprocessor.
- 256K bytes on board memory.
- Up to one megabyte of system memory.
- Up to 64K bytes of system ROM/EPROM.
- Two RS-232C serial I/O ports.
- Three parallel I/O ports.
- Floppy disk controller for 51/4" or 8" single or double density disk drives.
- Four independent DMA channels.
- Sixteen levels of vectored interrupts.

*Available Soon.

Circle 275 on inquiry card.

To get the MPX-16 up and running only requires one disk drive, power supply and serial terminal.

- MPX-16 single board computer assembled, tested and burned in with 64K bytes of RAM, CP/M-86 or MS-DOS operating system * $1,895.00
- MPX-16 with 256K bytes of RAM $2,135.00
- MPX-16 Semi-Kit (wave soldered pc board) less IC's $595.00
- Complete kit of IC's burned in and tested with 64K bytes of RAM $595.00
- With 256K bytes of RAM $800.00
- MPX-16 Unpopulated (bare) pc board, silk screened and solder masked $300.00
- CP/M-86 Operating System on 51/4" or 8" diskette $200.00
- MPX-16 Switching Power Supply including power supply harness $300.00
- MPX-16 Technical Reference and User's Manual $50.00

Call for current pricing on serial terminals, floppy disk drives, metal enclosures, hard disk systems, etc.

To Order: Call Toll Free
1-800-645-3479
In N.Y. 1-516-374-6793

MICROMINT INC.
561 Willow Avenue
Cedarhurst, NY 11516

Micromint MPX-16
The System with the Winning Combination.

IBM PC is a trademark of International Business Machines. Inc.. CP/M-86 is a trademark of Digital Research. Inc..

MS-DOS is a trademark of Microsoft Corp

www.americanradiohistory.com

Listing 5 continued:

```
0330  01 78 00 00 00 00    DB  001,78H,000,000,000,000,000,000,000,000  ; 130 ; FRANCE  - 78
      00 00 00
0339  05 70 00 00 00 00    DB  005,70H,000,000,000,000,000,000,000,000  ; 131 ; SWEDEN  - 70
      00 00 00
0342  02 78 00 00 00 00    DB  002,78H,000,000,000,090,000,000,000,000  ; 132 ; GERMANY - 78
      00 00 00
034B  01 40 00 00 00 00    DB  001,040,000,000,000,000,000,000,000,000  ; 133 ; FRANCE  - 40
      00 00 00
0354  02 07 55 F5 05 05    DB  002,007,055,0F5,005,005,0FE,04F,001      ; 134
      FE 4F 01
035D  00 71 89 89 8F 88    DB  000,071,089,089,08F,088,088,050,000      ; 135
      88 50 00
0366  00 0E 5F 05 95 95    DB  000,00E,05F,005,095,095,005,50H,00C      ; 136
      05 50 0C
036F  00 1C BE AA 2A 2A    DB  000,01C,0BE,0AA,02A,02A,0AA,0BA,018      ; 137
      AA BA 18
0378  01 70 00 00 00 00    DB  001,70H,000,000,000,000,000,000,000,000  ; 138 ; FRANCE  - 70
      00 00 00
0381  00 A2 A2 3E 1E 82    DB  000,0A2,0A2,03E,01E,082,082,000,000      ; 139
      82 00 00
038A  00 52 D2 9E BE C2    DB  000,052,002,09E,0BE,0C2,042,000,000      ; 140
      42 00 00
0393  00 12 92 DE 4E 02    DB  000,012,092,0DE,04E,002,002,000,000      ; 141
      02 00 00
039C  02 58 00 00 00 00    DB  002,58H,000,000,000,000,000,000,000,000  ; 142 ; GERMANY - 58
      00 00 00
03A5  03 47 4E BA 82 BA    DB  003,047,04E,0BA,082,0BA,04E,047,003      ; 143
      4E 47 03
03AE  05 40 00 00 00 00    DB  005,040,000,000,000,000,000,000,000,000  ; 144 ; SWEDEN  - 40
      00 00 00
03B7  04 78 00 00 00 00    DB  004,78H,000,000,000,000,000,000,000,000  ; 145 ; DENMARK - 78
      00 00 00
03C0  04 58 00 00 00 00    DB  004,58H,000,000,000,000,000,000,000,000  ; 146 ; DENMARK - 58
      00 00 00
03C9  00 0E 5F D1 91 91    DB  000,00E,05F,0D1,091,091,0D1,05F,00E      ; 147
      91 5F 0E
03D2  02 7C 00 00 00 00    DB  002,07C,000,000,000,000,000,000,000,000  ; 148 ; GERMANY - 7C
      00 00 00
03DB  00 0E 1F 91 D1 51    DB  000,00E,01F,091,0D1,051,091,01F,00E      ; 149
      11 1F 0E
03E4  00 5E DF B1 B1 C1    DB  000,05E,0DF,0B1,0B1,0C1,05E,01F,001      ; 150
      5E 1F 01
03ED  01 7C 00 00 00 00    DB  001,07C,000,000,000,000,000,000,000,000  ; 151 ; FRANCE  - 7C
      00 00 00
03F6  20 80 99 0F 06 0C    DB  020,080,099,00F,006,00C,098,080,020      ; 152
      98 80 20
03FF  02 5C 00 00 00 00    DB  002,05C,000,000,000,000,000,000,000,000  ; 153 ; GERMANY - 5C
      00 00 00
0408  02 5D 00 00 00 00    DB  002,5DH,000,000,000,000,000,000,000,000  ; 154 ; GERMANY - 5D
      00 00 00
0411  18 3C 66 42 FF FF    DB  018,03C,066,042,0FF,0FF,042,066,024      ; 155
      42 66 24
041A  03 23 00 00 00 00    DB  003,023,000,000,000,000,000,000,000,000  ; 156 ; ENGLAND - 23
      00 00 00
0423  00 00 94 54 3F 54    DB  000,000,094,054,03F,054,094,000,000      ; 157
      94 00 00
042C  07 23 00 00 00 00    DB  007,023,000,000,000,000,000,000,000,000  ; 158 ; SPAIN   - 23
      00 00 00
0435  00 04 12 12 7C 90    DB  000,004,012,012,07C,090,090,040,000      ; 159
      90 40 00
043E  04 0E 2A 6A EA AA    DB  004,00E,02A,06A,0EA,0AA,03C,01E,002      ; 160
      3C 1E 02
0447  00 12 12 5E CE B2    DB  000,012,012,05E,0CE,0B2,002,000,000      ; 161
      02 00 00
0450  00 0E 1F 11 51 D1    DB  000,00E,01F,011,051,0D1,091,01F,00E      ; 162
      91 1F 0E
0459  00 1E 1F 41 C1 81    DB  000,01E,01F,041,0C1,081,01E,01F,001      ; 163
      1E 1F 01
0462  07 7C 00 00 00 00    DB  007,07C,000,000,000,000,000,000,000,000  ; 164 ; SPAIN   - 7C
      00 00 00
046B  07 5C 00 00 00 00    DB  007,05C,000,000,000,000,000,000,000,000  ; 165 ; SPAIN   - 5C
      00 00 00
0474  00 12 BA AA AA AA    DB  000,012,0BA,0AA,0AA,0AA,072,07A,00A      ; 166
      72 7A 0A
047D  00 72 FA BA BA BA    DB  000,072,0FA,0BA,0BA,0BA,0BA,0FA,072      ; 167
      BA FA 72
0486  07 5D 00 00 00 00    DB  007,5DH,000,000,000,000,000,000,000,000  ; 168 ; SPAIN   - 5D
      00 00 00
048F  00 00 38 20 20 20    DB  000,000,038,020,020,020,020,000,000      ; 169
      20 00 00
0498  00 00 20 20 20 20    DB  000,000,020,020,020,020,038,000,000      ; 170
      38 00 00
04A1  00 42 F4 08 10 29    DB  000,042,0F4,008,010,029,053,015,009      ; 171
      53 15 09
04AA  00 42 F4 08 12 26    DB  000,042,0F4,008,012,026,04A,01F,002      ; 172
      4A 1F 02
04B3  07 5B 00 00 00 00    DB  007,5BH,000,000,000,000,000,000,000,000  ; 173 ; SPAIN   - 5B
      00 00 00
04BC  10 38 6C 44 10 38    DB  010,038,06C,044,010,038,06C,044,000      ; 174
      6C 44 00
04C5  00 44 6C 38 10 44    DB  000,044,06C,038,010,044,06C,038,010      ; 175
      6C 38 10
04CE  00 55 00 AA 00 55    DB  000,055,000,0AA,000,055,000,0AA,000      ; 176
      00 AA 00
04D7  55 AA 55 AA 55 AA    DB  055,0AA,055,0AA,055,0AA,055,0AA,055      ; 177
      55 AA 55
04E0  FF AA FF 55 FF AA    DB  0FF,0AA,0FF,055,0FF,0AA,0FF,055,0FF      ; 178
      FF 55 FF
04E9  00 00 00 00 FF 00    DB  000,000,000,000,0FF,000,000,000,000      ; 179
      00 00 00
04F2  08 08 08 08 FF 00    DB  008,008,008,008,0FF,000,000,000,000      ; 180
      00 00 00
04FB  28 28 28 28 FF 00    DB  028,028,028,028,0FF,000,000,000,000      ; 181
      00 00 00
0504  08 08 08 FF 00 00    DB  008,008,008,0FF,000,000,0FF,000,000      ; 182
      FF 00 00
050D  08 08 08 0F 08 08    DB  008,008,008,00F,008,008,00F,000,000      ; 183
      0F 00 00
0516  28 28 28 28 3F 00    DB  028,028,028,028,03F,000,000,000,000      ; 184
      00 00 00
051F  28 28 28 EF 00 00    DB  028,028,028,0EF,000,000,0FF,000,000      ; 185
      FF 00 00
0528  00 00 00 FF 00 00    DB  000,000,000,0FF,000,000,0FF,000,000      ; 186
      FF 00 00
0531  28 28 28 2F 20 20    DB  028,028,028,02F,020,020,03F,000,000      ; 187
      3F 00 00
053A  28 28 28 E8 08 08    DB  028,028,028,0E8,008,008,0F8,000,000      ; 188
      F8 00 00
0543  08 08 08 F8 08 08    DB  008,008,008,0F8,008,008,0F8,000,000      ; 189
      F8 00 00
054C  28 28 28 28 F8 00    DB  028,028,028,028,0F8,000,000,000,000      ; 190
      00 00 00
0555  08 08 08 08 0F 00    DB  008,008,008,008,00F,000,000,000,000      ; 191
      00 00 00
055E  00 00 00 00 F8 08    DB  000,000,000,000,0F8,008,008,008,008      ; 192
      08 08 08
0567  08 08 08 08 F8 08    DB  008,008,008,008,0F8,008,008,008,008      ; 193
      08 08 08
0570  08 08 08 08 0F 08    DB  008,008,008,008,00F,008,008,008,008      ; 194
      08 08 08
0579  00 00 00 00 FF 08    DB  000,000,000,000,0FF,008,008,008,008      ; 195
      08 08 08
0582  08 08 08 08 08 08    DB  008,008,008,008,008,008,008,008,008      ; 196
      08 08 08
058B  08 08 08 08 FF 08    DB  008,008,008,008,0FF,008,008,008,008      ; 197
      08 08 08
0594  00 00 00 00 FF 28    DB  000,000,000,000,0FF,028,028,028,028      ; 198
      28 28 28
059D  00 00 00 FF 00 00    DB  000,000,000,0FF,000,000,0FF,008,008      ; 199
      FF 08 08
05A6  00 00 00 F8 08 08    DB  000,000,000,0F8,008,008,0E8,028,028      ; 200
      E8 28 28
05AF  00 00 00 3F 20 20    DB  000,000,000,03F,020,020,02F,028,028      ; 201
      2F 28 28
```

Listing 5 continued on page 374

www.americanradiohistory.com

Alspa

ZERO

ANNOUNCING THE HIGH SPEED, LOW COST NETWORK

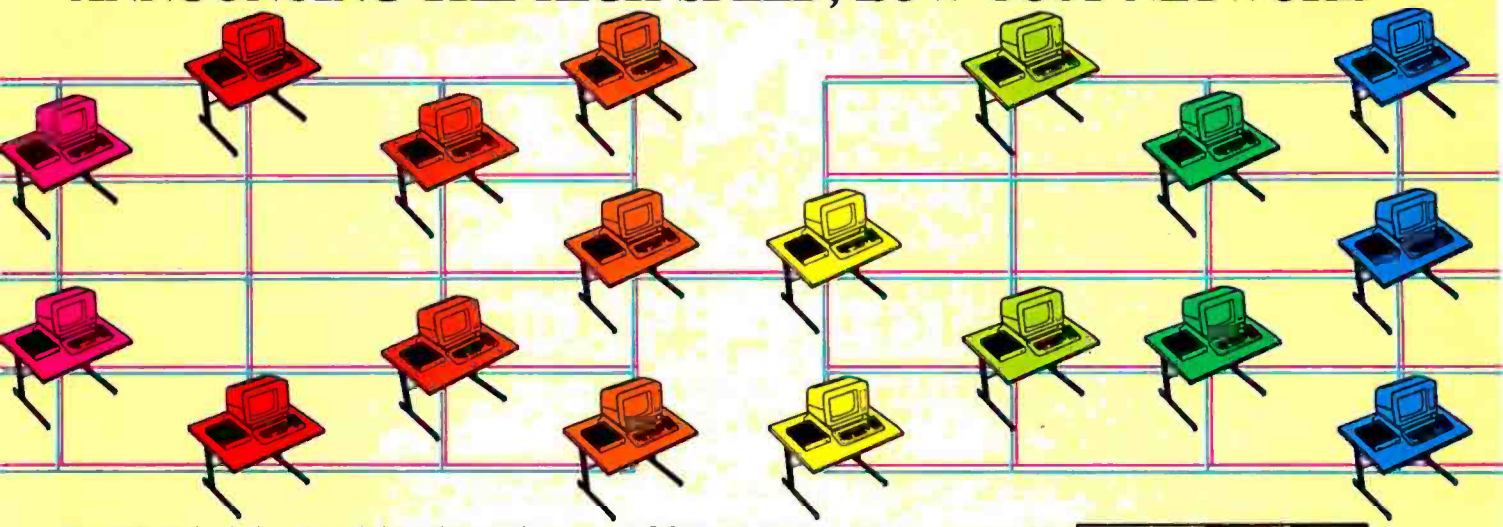

The **ZERO** is designed to bring high performance LOCAL AREA NETWORKING to users at budget prices.

The **ZERO** and **ZERO-NET** are unique. Any **ZERO** station can be a Network Master or Network Remote, permitting, for the first time, a low cost **non stop** network.

The **ZERO-NET** features a High Level Data Link Controller (message synchronous) at 400K bps carried over a simple twisted pair cable. To achieve maximum speed and reliability we use collision detection/avoidance circuitry and automatic CRC error detection/retransmission.

Each **ZERO** computer in the net can have Floppy Disk and/or Winchester Drives. The **ZERO** itself is a Z80 based Microcomputer with 64K Ram, 2K to 16K of EPROM, 2 Serial ports, 2 parallel ports, floppy disk controller, Z80CTC counter-timer and Z80DMA direct memory access.

The **ZERO** hardware design was optimized for TURBODOS*, (CP/M**, MP/M** compatible) including such enhancements as console type-ahead (buffering), 1.416 Mbytes per 8 inch double-sided floppy, multi-processing (background processing) such as print spooling, etc.

KEY PARAMETERS

- Local Area Networks up to 256 nodes per NET, with any mix of Master and Remote stations. Each station may support up to 16 logical drives, local or remote.
- Local Area Networks may be linked through gateways.
- Per Node — 0 to 2 floppies and 0 to 4 hard disks with appropriate Driver Modules.
- Per Node — parallel and/or serial printer.
- Each user can control print routing and/or spooling.
- Each node may reference a file system and/or printer on any other node.
- Each node may have an Autostart Log-on with security access protection.
- Each node may have a FIFO type Electronic Mailbox.
- Each node may operate with MP/M compatible file/ record interlocks, or with special TURBODOS relaxation rules.
- Maximum recommended buss length of 4,000 L.Ft.
- Full CP/M and MP/M compatibility.
- The TURBODOS operating system can support up to one GIGA Byte (1,000 Mega Bytes) per logical drive.

The **ZERO-NET** product family — the **ZERO**, the **ZERO/FD**, the **Z-DRIVE** and the **ZNT** terminal — all the components required to configure an entire system are available for immediate delivery. The **ZERO** provides a microcomputer network that OUTPERFORMS many multi-user minicomputer systems at substantially lower cost. While the competition is still studying it, **ALSPA** has done it!

ZERO-NET

Alspa Computer, Inc.

300 Harvey West Boulevard, Santa Cruz, CA 95060
(408) 429-6000 Telex 176279

*TURBODOS is a trademark of Software 2000, Inc.
**CP/M and MP/M are trademarks of Digital Research, Inc.

Circle 17 on inquiry card.

www.americanradiohistory.com

Listing 5 continued:

```
7F0: 03BB 3B 3B 3B EB 3B 0B 0B    DB 03H,03H,03H,0EH,0BH,00H,0EH,03H ; 2BE
     EB 3B 3B
7F7: 05C3 3B 3B 3B 3B 3B 3B 3B    DB 03H,03H,03H,03H,03H,03H,03H,03H ; 2C3
     3F 3B 3B
7FF: 03EA 0B 0B 0B FF 0B 0B       DB 00H,00H,00H,0FFH,00H,00H,0EFH,03H ; 2CA
     EF 3B 3B
806: 03B5 3B 3B 3B 3B 3B 3B 3B    DB 03H,03H,03H,03H,03H,03H,03H,03H ; 2D5
     3B 3B 3B
80E: 03BC 3B 2B 2B EF 0B 0B       DB 03H,02H,02H,0EFH,00H,00H,0EFH,03H ; 2DE
     EF 3B 3B
816: 03E5 3B 3B 2B 3B 2B 2B 2B    DB 03H,03H,03H,02H,0EH,03H,03H,03H ; 2E7
     2B 2B 2B
81E: 03EC 0B 0B 0B FB 0B 0B       DB 00H,00H,00H,0FBH,00H,00H,0F0H,00H ; 2EC
     F0 00 00
826: 03F7 3B 3B 3B 3B 3F 2B 2B    DB 03H,03H,03H,03H,3FH,2BH,2BH,2BH ; 2F7
     2B 2B 2B
82E: 0428 0B 0B 0B 0B 3F 2B 2B    DB 00H,00H,00H,00H,3FH,2BH,2BH,2BH ; 300
     2B 2B 2B
836: 0439 0B 0B 0B 0B 3F 2B 2B    DB 00H,00H,00H,00H,3FH,2BH,2BH,2BH ; 309
     2B 2B 2B
83E: 0442 0B 0B 0B 0B 3F 2B 2B    DB 00H,00H,00H,00H,3FH,2BH,2BH,2BH ; 312
     2B 2B 2B
846: 044B 0B 0B 0B 0B 3F 2B 2B    DB 00H,00H,00H,00H,3FH,2BH,2BH,2BH ; 31B
     2B 2B 2B
84E: 0454 0B 0B 0B 0F 0B 0B       DB 00H,00H,00H,00H,0FH,00H,00H,0FFH ; 324
     FF FF FF
856: 045D 0F 0F 0F 0F 0F 0F       DB 0FH,0FH,0FH,0FH,0FH,0FH,0FH,0FH ; 32D
     0F 0F 0F
85E: 0466 3F 3F 3F 3F 0B 0B       DB 0FH,3FH,3FH,3FH,0BH,0BH,0FH,00H ; 336
     0F 00 00
866: 046F 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 33F
     00 00 00
86E: 0478 FF FF FF FF FF FF       DB 0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH ; 348
     FF FF FF
876: 0481 0F 0F 0F 0F 0F 0F       DB 0FH,0FH,0FH,0FH,0FH,0FH,0FH,00H ; 351
     0F 00 00
87E: 048A 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 35A
     00 00 00
886: 0493 FF FF FF FF FF FF       DB 0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH ; 363
     FF FF FF
88E: 049C 0F 0F 0F 0F 0F 0F       DB 0FH,0FH,0FH,0FH,0FH,0FH,0FH,00H ; 36C
     0F 00 00
896: 04A5 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 375
     00 00 00
89E: 04AE 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 37E
     00 00 00
8A6: 04B7 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 387
     00 00 00
8AE: 04C0 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 390
     00 00 00
8B6: 04C9 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 399
     00 00 00
8BE: 04D2 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3A2
     00 00 00
8C6: 04DB 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3AB
     00 00 00
8CE: 04E4 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3B4
     00 00 00
8D6: 04ED 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3BD
     00 00 00
8DE: 04F6 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3C6
     00 00 00
8E6: 04FF 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3CF
     00 00 00
8EE: 0508 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3D8
     00 00 00
8F6: 0511 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3E1
     00 00 00
8FE: 051A 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3EA
     00 00 00
906: 0523 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3F3
     00 00 00
90E: 052C 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 3FC
     00 00 00
916: 0535 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 405
     00 00 00
91E: 053E 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 40E
     00 00 00
926: 0547 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 417
     00 00 00
92E: 0550 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 420
     00 00 00
936: 0559 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 429
     00 00 00
93E: 0562 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 432
     00 00 00
946: 056B 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 43B
     00 00 00
94E: 0574 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 444
     00 00 00
956: 057D 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 44D
     00 00 00
95E: 0586 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 456
     00 00 00
966: 058F 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 45F
     00 00 00
96E: 0598 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 468
     00 00 00
976: 05A1 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 471
     00 00 00
97E: 05AA 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 47A
     00 00 00
986: 05B3 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 483
     00 00 00
98E: 05BC 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 48C
     00 00 00
996: 05C5 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 495
     00 00 00
99E: 05CE 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 49E
     00 00 00
9A6: 05D7 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4A7
     00 00 00
9AE: 05E0 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4B0
     00 00 00
9B6: 05E9 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4B9
     00 00 00
9BE: 05F2 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4C2
     00 00 00
9C6: 05FB 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4CB
     00 00 00
9CE: 0604 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4D4
     00 00 00
9D6: 060D 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4DD
     00 00 00
9DE: 0616 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4E6
     00 00 00
9E6: 061F 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4EF
     00 00 00
9EE: 0628 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 4F8
     00 00 00
9F6: 0631 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 501
     00 00 00
9FE: 063A 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 50A
     00 00 00
A06: 0643 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 513
     00 00 00
A0E: 064C 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 51C
     00 00 00
A16: 0655 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 525
     00 00 00
A1E: 065E 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 52E
     00 00 00
A26: 0667 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 537
     00 00 00
A2E: 0670 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 540
     00 00 00
A36: 0679 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 549
     00 00 00
A3E: 0682 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 552
     00 00 00
A46: 068B 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 55B
     00 00 00
A4E: 0694 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 564
     00 00 00
A56: 069D 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 56D
     00 00 00
A5E: 06A6 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 576
     00 00 00
A66: 06AF 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 57F
     00 00 00
A6E: 06B8 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 588
     00 00 00
A76: 06C1 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 591
     00 00 00
A7E: 06CA 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 59A
     00 00 00
A86: 06D3 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5A3
     00 00 00
A8E: 06DC 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5AC
     00 00 00
A96: 06E5 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5B5
     00 00 00
A9E: 06EE 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5BE
     00 00 00
AA6: 06F7 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5C7
     00 00 00
AAE: 0700 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5D0
     00 00 00
AB6: 0709 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5D9
     00 00 00
ABE: 0712 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5E2
     00 00 00
AC6: 071B 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5EB
     00 00 00
ACE: 0724 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5F4
     00 00 00
AD6: 072D 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 5FD
     00 00 00
ADE: 0736 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 606
     00 00 00
AE6: 073F 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 60F
     00 00 00
AEE: 0748 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 618
     00 00 00
AF6: 0751 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 621
     00 00 00
AFE: 075A 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 62A
     00 00 00
B06: 0763 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 633
     00 00 00
B0E: 076C 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 63C
     00 00 00
B16: 0775 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 645
     00 00 00
B1E: 077E 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 64E
     00 00 00
B26: 0787 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 657
     00 00 00
B2E: 0790 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 660
     00 00 00
B36: 0799 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 669
     00 00 00
B3E: 07A2 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 672
     00 00 00
B46: 07AB 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 67B
     00 00 00
B4E: 07B4 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 684
     00 00 00
B56: 07BD 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 68D
     00 00 00
B5E: 07C6 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 696
     00 00 00
B66: 07CF 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 69F
     00 00 00
B6E: 07D8 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 6A8
     00 00 00
B76: 07E1 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 6B1
     00 00 00
B7E: 07EA 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 6BA
     00 00 00
B86: 07F3 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 6C3
     00 00 00
B8E: 07FC 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 6CC
     00 00 00
```

```
B96: 0805 0B 1E 3D 0B 0B 0B       DB 00H,01EH,03DH,00H,00H,00H,00H,00H ; 6D5
     3D 1E 0B
B9E: 080E 0B 54 56 56 54 54       DB 00H,054H,056H,056H,054H,054H,054H,00H ; 6DE
     54 54 0B
BA7: 0817 0B 12 22 22 FA 22       DB 00H,022H,022H,0FAH,022H,022H,022H,00H ; 6E7
     22 22 0B
BB0: 0820 0B 4E 0A 0A 52 52       DB 00H,04EH,00AH,00AH,052H,052H,052H,00H ; 6F0
     52 52 0B
BB9: 0829 0B 22 32 3A 52 0A       DB 00H,022H,032H,03AH,052H,00AH,00AH,00H ; 6F9
     0A 02 0B
BC2: 0832 0B 0B 0B 0B 3F 0B       DB 00H,00H,00H,00H,03FH,00H,00H,00H ; 702
     0B 0B 0B
BCB: 083B 0B 06 0A 0A 0E 0A       DB 00H,06H,00H,00H,00H,0EH,00H,00H ; 70B
     0A 0A 0B
BD4: 0844 0B 1D 1B 1D 14 1D       DB 00H,01DH,01BH,01DH,014H,01DH,00H,00H ; 714
     1D 1D 0B
BDD: 084D 0B 0B 0B 0B 0B 2C       DB 00H,00H,00H,00H,00H,02CH,00H,00H ; 71D
     12 2C 0B
BE6: 0856 0B 0B 0B 0B 0B 2C       DB 00H,00H,00H,00H,00H,02CH,00H,00H ; 726
     12 2C 0B
BEF: 085F 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 72F
     00 00 0B
BF8: 0868 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 738
     00 00 0B
C01: 0871 0B 1D 1D 1D 0B 0A       DB 00H,01DH,01DH,01DH,00H,00H,00H,00H ; 741
     0A 0A 0B
C0A: 087A 0B 7D 7D 0B 0B 0B       DB 00H,07DH,07DH,00H,00H,00H,00H,00H ; 74A
     0B 0B 0B
C13: 0883 0B 0C 70 60 60 0B       DB 00H,00CH,070H,060H,00H,00H,00H,00H ; 753
     0B 0B 0B
C1C: 088C 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 75C
     0B 0B 0B
C25: 0895 0B 0B 0B 0B 0B 0B       DB 00H,00H,00H,00H,00H,00H,00H,00H ; 765
     0B 0B 0B
```

```
;FFFFFFFFFFFFFFFFFFFFFFFFFF
;
; Set up bits to distinguish between normal graphics characters
; and those which can use the British International character sets
;
;FFFFFFFFFFFFFFFFFFFFFFFFFF

0000                    .RADIX 10       ; Back to decimal notation

0000 FF                 @FFFF: DB       11111111B ; Built 0 to 7
0001 FF                        DB       11111111B ; 8 - 15
0002 F3                        DB       11110011B ; 16 - 23
0003 E7                        DB       11100111B ; 24 - 31
0004 00                        DB       00000000B ; 127 - 124
0005 EE                        DB       11101110B ; 123 - 116
0006 00                        DB       00000000B ; 115 - 108
0007 4A                        DB       01001010B ; 107 - 100
0008 F9                        DB       11111001B ; 99 - 92
0009 FF                        DB       11111111B ; 91 - 84
000A FF                        DB       11111111B ; 83 - 76
000B FF                        DB       11111111B ; 75 - 68
000C FF                        DB       11111111B ; 67 - 60
000D FF                        DB       11111111B ; 59 - 52
000E FF                        DB       11111111B ; 51 - 44
000F 0F                        DB       11110000B ; 43 - 36
0010 FF                        DB       11111111B ; 35 - 28
0011 FF                        DB       11111111B ; 27 - 20
0012 FF                        DB       11111111B ; 19 - 12
0013 FF                        DB       11111111B ; 11 - 4
0014 00                        DB       00000000B ; 3 - 0

0015 0B                 LASTBANK: ; All code after this label is freed to BDOS after
                                  ; initialization of the program
```

Listing 5 continued on page 376

www.americanradiohistory.com

Quick, name one software product that can pay for itself in five minutes?

(Hint: It's from **Fox** & **Geller**)

It's true. **Fox** & **Geller** offers dBASE II™ users a product that's so dynamic and easy to use, it can pay for itself in just five minutes. That's because this product is a powerful program generator, which writes concise programs to set up and maintain any type of database.

That means you can run a database as is or customize them—all with no programming experience whatsoever! All you have to do is draw your data entry form on the screen and you're in business. In business to add, edit, or delete. In business to print records, mailing labels, or forms up to 96 lines by 132 columns. In business to transfer data to WordStar™ and MailMerge™, do three kinds of data validation, generate customized menus, and more. In short, this **Fox** & **Geller** product dramatically expands your dBASE II capabilities.

Now, stop and consider how such capabilities can save you hours of work and frustration, while making dBASE II more useful. And it's so easy to use, you don't need an expensive programming consultant. Compare that with this product's low price of $295.00, and you could find yourself saving an equal sum the very first time you use it!

Use what? **Fox** & **Geller**'s QUICKCODE™, that's what. Ask for it by name at your local computer dealer. And while you're there, see our full line of quality software. Software that's practical, reliable, and reasonably priced. Software that's created by Jeff Fox and Jacob Geller, individuals who stand behind every product that bears their names.

Other **Fox** & **Geller** software include:

dUTIL™ that combines your dBASE II command files automatically to produce a faster running time. Lifelines called dUTIL and QUICKCODE "two very useful packages if you are doing any programming in dBASE II" (October, 1982).

dGRAPH™ is a brand new package that lets you easily produce various types of graphs from your database. How easy? Just press one key and you've got a pie chart, a bar graph, or a line graph complete with shadings and overlays if desired. Runs on many popular printers and is available for non-dBASE II users, too!

Use the Reader Service Card to receive full specifications for all of these **Fox** & **Geller** products. Or contact:

Fox & **Geller**, Inc.
P.O. Box 1053
Teaneck, NJ 07666
(201) 837-0142

Circle 183 on inquiry card.

dBASE II is a trademark of Ashton-Tate. WordStar and MailMerge are registered trademarks of Micropro International. QUICKCODE, dUTIL, and dGRAPH are trademarks of Fox & Geller.

www.americanradiohistory.com

Listing 5 continued:

```
                                ;$$$$$$$$$$$$$$$$$$$$
                                ;
                                ;  Code to load and initialize the printing program...
                                ;  sets up DOS to keep all code before "LASTONE" label
                                ;  safe from overlaying during system operation.
                                ;
                                ;$$$$$$$$$$$$$$$$$$$$


07B3                            INIT_CODE PROC NEAR

07B3  58                            POP  AX                 ; Remove return address of CALL
                                    ;
                                    ; After this initialization routine is finished, we wish to return
                                    ; control to DOS and prevent DOS from overlaying the PR256 code.
                                    ; This is done by replacing the INT 1'20' command found at the front
                                    ; of the Program Segment Prefix control block with an INT 1'27'
                                    ; "Program end but stay resident" command.  The address to this instruction
                                    ; is placed on the front of the stack, behind the return address
                                    ; used by this subroutine.  When the initialization is finished, this
                                    ; routine returns to its caller (the main program) which executes a
                                    ; return to the PSP, resulting in the INT 1'27' command execution.
                                    ;
07B4  1E                            PUSH DS                 ; move segment address to PSP onto stack
07B5  BF 0000                       MOV  DI,0               ; Set return to first location in PSP
07B8  57                            PUSH DI                 ;
07B9  50                            PUSH AX                 ; Restore return address
07BA  B0 27                         MOV  AL,NEWINT          ; Set up INT 1'27' in PSP
07BC  88 45 01                      MOV  [DI+1],AL          ;

07BF  B8 0000                       MOV  AX,0               ; set up address to INT 17H vector
07C2  8E D8                         MOV  DS,AX              ;
07C4  BB 005C                       MOV  BX,INTADDR         ;
07C7  C4 3F                         LES  DI,DWORD PTR [BX]  ; Load double word addr to BIOS print rtne
07C9  8B ---- R                     MOV  AX,SEG DWORD_ADDR  ; Now set up addr to store BIOS addr
07CC  8E D8                         MOV  DS,AX              ;
07CE  89 3E 0004 R                  MOV  DWORD_ADDR,DI      ;
07D2  8C C0                         MOV  AX,ES              ;
07D4  A3 0006 R                     MOV  DWORD_ADDR+2,AX    ; store BIOS print routine address
07D7  B8 ---- R                     MOV  AX,SEG START_UP    ;
07DA  8E C0                         MOV  ES,AX              ; don't forget to save segment addr
07DC  BF 001B R                     MOV  DI,OFFSET START_UP ;
07DF  B8 0000                       MOV  AX,0               ;
07E2  8E D8                         MOV  DS,AX              ; Now, address back to INT 17H vector
07E4  BB 005C                       MOV  BX,INTADDR         ;
07E7  89 3F                         MOV  [BX],DI            ;
07E9  8C C7                         MOV  DI,ES              ;
07EB  89 7F 02                      MOV  [BX+2],DI          ;
07EE  BA 07B3 R                     MOV  DX,OFFSET LASTONE  ; Save all code up to "LASTONE" label
07F1  81 C2 0100                    ADD  DX,0100H           ;   from overlaying by DOS
07F5  C3                            RET                     ; Return to MAIN program


07F6                            INIT_CODE ENDP
07F6                            CODE ENDS
                                END
```

Structures and records:

```
                Name            Width   # fields
                                Shift   Width   Mask    Initial

PRINTERS . . . . . .            0006    0005
  SYS_MODE . . . . . .          0000
  GRAF_CNT . . . . . .          0001
  FULL_INSTR . . . . . .        0003
  GRAF_PRINTER . . . . . .      0004
  INTLSET. . . . . .            0005
```

Segments and groups:

```
                Name            Size    align   combine class

CODE . . . . . .                07F6    PARA    NONE
STACK. . . . . .                0050    PARA    STACK
```

Symbols:

```
                Name            Type    Value   Attr

ARND@BIT_GRAF. . . . . .        L NEAR  00E2    CODE
AROUND . . . . . .              L NEAR  018F    CODE
BIT@CHAR . . . . . .            L NEAR  0131    CODE
BITTYP . . . . . .              L BYTE  079E    CODE
BITVAL . . . . . .              L BYTE  01F5    CODE
CHKCHAR. . . . . .              L NEAR  0123    CODE
DO@BIT_GRAF. . . . . .          L NEAR  018D    CODE
DO@ESC_NULL. . . . . .          L NEAR  0104    CODE
DO@ESC_SINGLE. . . . . .        L NEAR  00F7    CODE
DONE . . . . . .                L NEAR  01C5    CODE
DWORD_ADDR . . . . . .          L WORD  0004    CODE
ESC_CHAR . . . . . .            Number  001B
INIT_CODE. . . . . .            N PROC  07B3    CODE    Length =0043
INTADDR. . . . . .              Number  005C
LASTONE. . . . . .              L NEAR  07B3    CODE
LOOP@SEND. . . . . .            L NEAR  01EA    CODE
MASK@BIT_GRAF. . . . . .        Number  00FE
MASK@ESC_C . . . . . .          Number  00BF
MASK@ESC_NULL. . . . . .        Number  00DF
MASK@ESC_SING. . . . . .        Number  00EF
MASK@FST_BITG. . . . . .        Number  00FB
MASK@NEW_INTL. . . . . .        Number  00F7
MASK@PREV_ESC. . . . . .        Number  007F
MASK@SEC_BITG. . . . . .        Number  00FD
MORE@TO@DONE . . . . . .        L NEAR  0057    CODE
NESC . . . . . .                L NEAR  0118    CODE
NEW@INTSET . . . . . .          L NEAR  0163    CODE
NEWINT . . . . . .              Number  0027
NON_EXTND. . . . . .            L NEAR  0188    CODE
NORM_MODE. . . . . .            L NEAR  006C    CODE
NOT@BIT@MODE . . . . . .        L NEAR  0059    CODE
NOT@ESC. . . . . .              L NEAR  0112    CODE
NOT@ESCC . . . . . .            L NEAR  0110    CODE
NOT@ESC_C. . . . . .            L NEAR  00CE    CODE
NOT@ESC_NULL . . . . . .        L NEAR  00BA    CODE
NOT@ESC_SING . . . . . .        L NEAR  00AD    CODE
NOT@FST. . . . . .              L NEAR  0090    CODE
NOT@INT. . . . . .              L NEAR  00E8    CODE
NOT@INTL . . . . . .            L NEAR  00A4    CODE
NOT@NUL. . . . . .              L NEAR  00C5    CODE
NOT@NULL . . . . . .            L NEAR  0109    CODE
NOT@SEC. . . . . .              L NEAR  0081    CODE
NOT@SINGLE . . . . . .          L NEAR  00FC    CODE
NOT@VALID. . . . . .            L NEAR  009F    CODE
NUL. . . . . .                  Number  0000
PCHAR. . . . . .                L NEAR  0030    CODE
PRI. . . . . .                  L 0006  0009    CODE
PR2. . . . . .                  L 0006  000F    CODE
PR256. . . . . .                F PROC  0000    CODE    Length =01CE
PR2BYTE. . . . . .              N PROC  01D4    CODE    Length =0010
PR3. . . . . .                  L 0006  0015    CODE
PR9BYTS. . . . . .              N PROC  01E4    CODE    Length =0011
PRBYTE . . . . . .              N PROC  01CE    CODE    Length =0006
SENDCHAR . . . . . .            L NEAR  00CB    CODE
SET@BIT_GRAF . . . . . .        L NEAR  00D0    CODE
START_UP . . . . . .            L NEAR  001B    CODE
TI . . . . . .                  L NEAR  0043    CODE
TMPBYTE. . . . . .              L BYTE  0008    CODE
TO@CHKCHAR . . . . . .          L NEAR  0069    CODE

Warning Severe
Errors  Errors
0       0
```

www.americanradiohistory.com

SANYO PLUS

The Sanyo MBC 1000 is basically an excellent performer operating both fast and reliably.
Infoworld - 11/29/82

SANYO PLUS

$1995

A $2000 computer. with $2000 of software. for $1995.

The Sanyo Plus consists of a Sanyo MBC-1000 computer with a built-in 12" high-res. green phospher 25x80 display. The detached keyboard features 5 special function keys and a 10-key pad. The Sanyo Plus comes complete with a parallel printer port. a serial communications port and room for three additional cards.

Plus you receive a second drive for a total formatted disk capacity of 624K.

Plus we now include over $2000 worth of software including CP/M® 2.2. Sanyo Basic. WordStar 3.0 with training guide. Mailmerge. SpellStar CalcStar. InfoStar and a games disk.

Plus you get a 300 baud direct connect modem. with cable modem software and a 1 month subscription to The Source. We thoroughly integrate and test each system. and generate work copies of all your software.

If you can find a better deal - buy it.

Extended warranty available. Five module business software pack: $99.
Sanyo Minus: One drive system $1649. 10 MB. Drive system $3695.

TELEVIDEO

Now backed locally by T.R.W. Built-in CRT. detachable keyboard dual floppys w/750K formatted capacity. 64K. CP/M and more. Special: Telesolutions — Wordstar TM and CalcStar TM w/system $279.

802 w/CP/M®	$2669
806 (20 Mb)	$5149
TS 1602G	$3495
TS 1602GH	$5495
816 (23 Mb)	$6298
800A's	$1299

ALTOS

Our tech's favorite systems. From the lowest priced 3-user systems with either 2 or 6 MG. storage. to 40MG. 8-user 16 bit systems.

Add terminals. printers. and software and we can fully test and configure your system at low prices. Back nationwide by Moore Sysrems Service.

Series 5-15D	$2195
Series 5-5D	$3995
8000-10	$5575
8600-12	$9465

Series 5 8000 systems include MP/M

ZENITH

Introducing the Zenith Z-100. It's the new 8/16 bit system thats CP/M. MS-DOS. and S-100 compatible.

Two built-in 320K 5 1/4" drives. 128K RAM. optional color graphics with control of eight colors and 144,000 dots. five S-100 expansion slots. and a full feature keyboard.

Z-110-22	$3089
Z-120-22	$3165
Software Special	$395
Z-89's, 90's	call

NORTHSTAR

Prices now include free burn and rest. We warranty each unit for 90 days from the day you receive it (not 90 days from the day we receive it). Call for prices on compatible software and hardware.

Advantage 64K Quad	$2769
Horizon 64K Quad	$2695
Advantage w/5 Mb.	$3795

TERMINALS

Terminal Sale:

ADDS Viewpoint 3A+	$479
Wyse 100	$699
Televideo 950	$869

Zenith ZT-1	$559
Televideo 910	$579
Televideo 925	$735
Zenith Z-19	$689
Adds Viewpoint	$489
Soroc IQ 130	$599
Adds Viewpoint 60	$724
Hazeltine Espirit	$499
Hazeltine Espirit II	$549
Hazeltine Espirit III	call

with built-in modem

Scottsdale Systems Ltd.

617 N. Scottsdale Road. Suite B. Scottsdale. Arizona 85257

(602) 941-5856

Call 8-5 Mon.-Fri.

PRINTERS

PRINTERS

Gemini 10	$369
Gemini 15	$469
NEC8023A	$465
Okidata 82A	$409
Okidata 83A	$649
Okidata 84	$995
Tally 1601 w/tract	$739
IDS microprism	$509
Epson	call

HIGH SPEED

Prism 80 "Loaded"	$1369
Prism 132 "Loaded"	$1464
Anadex 9501A	$1369
DataSouth DS-180	$1249
TI810's	Call

LETTER QUALITY

Diablo 620	$919
NEC 3510	$1495
NEC 7710	$2149

SERVICE/ORDERING

INTEGRATION: Prices listed are for new equipment in factory sealed boxes with manufacturer's warranty. We will preresr your equipment. integrate your system. configure your software. provide special cables. etc.. for an additional charge. Call for prices.

ORDERING: MAIL ORDER ONLY. Prices listed are for cash. No C.O.D.'s. We sell on a net 20 basis to Fortune 500 companies and Universities Charge cards add 2%. Prices subject to change. product subject to availability. AZ residents add 5%. Personal checks take 3 weeks to clear. 0-20% restacking fee for returned merchandise. Shipping extra - products are F.O.B. point of shipment. CP/M and MP/M are registered trademarks of Digital Research.

SOFTWARE: We sell all popular CP/M® programs at discount. Software sold only with systems nor warrantied for suitability.

I/O DEVICES

Houston Instruments:	
Hi-Pads	call
DMP-29	$1569
DMP-40	$745

Hayes:	
300 Smartmodem	$219
300/1200 Smartmodem	call

DAISYWRITER 2000

The best price/thruput in letter quality printers. 48k buffer 8 protocols graphics mode 4 interfaces std. Sub and Superscript Proportional Spacing and much more. Uses std. ribbons.

$1014

www.americanradiohistory.com

CALL "THE COMPUTER-LINE" IN COLORADO

The Computerline believes that it is important to be competitive by offering low prices; however, we regard service as the most important aspect of a mail-order organization. All our lines are available so that you, the customer, are able to talk to fully qualified computer specialists trained to answer all your questions pertaining to our line of microcomputers. We are renowned for our excellent after-sales support and our promptness for delivery. Peace of mind and excellence in service is our pledge to all our customers.

IBM Personal Computer Products

QUADRAM CORPORATION

QUADBOARD
The ultimate memory board for the IBM, featuring:
- fully expandable from 64 to 256K
- parallel port
- asynchronous (RS232) serial port
- clock/calendar
- RAM disk drive

$CALL

INTERFAZER
Used as:
- Peripheral buffer
- Multi-User Printer Controller
- Computer I/O Expander
- Incompatible Device Interface
- Peripheral Multiplexer
- Data Transfer Rate Converter

$CALL

MICROFAZER
- buffering from 8 to 64K (4 to 32 pages of text)
- printer and computer independent
- parallel/parallel; serial/serial and parallel/serial available
- compute while you print!

$CALL

DAVONG Systems, Inc.

Description:
The DavongSystems Memory Card is a convenient RAM memory expansion card for use in the IBM Personal Computer.

The Memory Card may be placed in any free system slot. It is completely compatible with all IBM Personal Computer software and hardware, and runs at the same speed as IBM memory products.

64K RAM $225 — 192K RAM $499
256K RAM $599

Hard Disk System for the IBM® Personal Computer.

ONLY $1595.00

Description: **5 MEGABYTES STORAGE**

The Davong System's Hard Disk Drive fits conveniently inside the second floppy disk location of the IBM Personal Computer chassis, providing more than 30 times the capacity of a floppy diskette, plus greater speed and reliability.

The DSI-501 System is compatible with IBM software, and supports IBM DOS*. The system includes all necessary components and software for installation.

5, 10 and 15 Megabytes available

TANDON DRIVE SPECIAL

Double Sided/Double Density
320K BYTES STORAGE
TM—100—2
NOW ONLY

$259

Call for TM-100-4

RGB Color Monitor SPECIAL!

Princeton Graphic Systems

- 690 Dots Horizontal
- 16 colors
- Non-glare screen
- Sharp looking—matches IBM

$CALL

IBM SOFTWARE

BUSINESS		ENTERTAINMENT	
TAX MANAGER	$199	GALACTIC ATTACK	$26
256K VISICALC	$189	ZORK I	$29
VISITREND/VISIPLOT	$239	ZORK II	$29
VISIDEX	$189	DEADLINE	$39
EASY EFFECTIVE ACCOUNTING SYSTEM	$389	CALL FOR NEW GAMES AT UNBEATABLE PRICES	
SUPERCALC	$219	T and G JOYSTICKS	$44.95
SUPERWRITER	$289	ADAM AND EVE PADDLES	$29.95

CALL FOR SOFTWARE NOT LISTED

MAYNARD ELECTRONICS

Floppy Disk Controller/with parallel	$229
Floppy Disk Controller/with serial	$259

THE ULTIMATE IBM® PERIPHERALS

Five Function
Memory/Serial/Parallel/Clock/Joystick

Monte Carlo™ Card

- 64K to 1 Megabyte of Memory
- ONE IBM Compatible Centronics Parallel Port
- ONE IBM Compatible Asynchronous Communications P
- Clock/Calendar (Battery Backed) with Alarm Features
- Dual-Port Joystick Interface
- **Future Upgrade Option:** Direct Connect Plug-On Modem

And the Sensational on a chip **$CALL**

I-C-MAGIC™

GRAPHIC MED/HI RES. SCREEN DUMP
PRINT SPOOLING UP TO 64K
TERMINAL EMULATION
$CALL

PGS—Princeton Graphics Systems
Hi-resolution, RGB Color Monitor ..... $CALL

5¼" Half Height 'Slimline' drives
put two floppies in a single slot! ..... $CALL

DAVONG 5 - 10 - 15M byte
Hard Disk Systems ..... from $1595

™ Trademarks of Microcomputer Business Industries Corp. (MBI)

Peripherals For All Computers

PRINTERS

NEC Spinwriter 7710/7730	$2339
8023A	$ 489
STAR Gemini 10 and Gemini 15	$CALL
EPSON (Graftrax Plus) MX-80	$CALL
OKIDATA	
80no tractor	$ 339
80 with tractor	$ 399
82Ano tractor	$ 439
82Awith tractor	$ 479
83A	$ 689
84Aparallel	$1029
84A serial	$1139
2K Buffer with serial current loop board	$ 139
Graphics 82A, 83A	$ 79

C-ITOH F10 Word Quality Printer

- 40 CPS Printing
- Letter quality excellence

Now Only $1395

SMITH CORONA TPI

Daisywheel/Letter Quality
NOW ONLY $589

Prowriter I 120cps (Parallel)	$ 469
Prowriter I 120cps (Parallel/Serial)	$ 619
Prowriter II (136 column) Parallel	$ 699
Prowriter II (136 column) Parallel/Serial	$ 749
C-ITOH F10 55 CPS	$1795

INTEGRAL DATA SYSTEMS
PRISM 132 Color printer with all options

- 200 cps Sprint Mode
- 4-color printing
- Friction/Tractor feed $1595

MONITORS

Zenith ZVM-121 Phosphor, 15 MHZ	$ 119
NEC 1201 Phosphor, 20 MHZ	$ 179
NEC 1201 Composite, Color	$ 335
NEC 1201 RGB Color	$ 899
Amdek 300 Phosphor	$ 179
Amdek Composite, Color	$ 349
Amdek IBM Compabible Color	$ 749
BMC Green	$ 89
Princeton Graphic RGB Color	$CALL
For IBM	
Electrohome RGB	$ 749
Electrohome IBM Cable	$ 49

MODEMS

Hayes Smartmodem, 300 baud	$219
Hayes Smartmodem, 1200 baud	$539
Hayes Chronograph	$189
Novation Cat	$145
Novation D-Cat	$165
Novation Auto Cat	$209
CERMETEK 1200 baud modem	$CALL

DISKETTES (5¼ inch)

SCOTCH WITH PLASTIC LIBRARY CASES (Boxes of 10) (48 Track single-sided, double density)	$26.50
VERBATIM DATALIFE SS/DD (Boxes of 10)	$24.95
VERBATIM DATALIFE DS/DD (Boxes of 10)	$44.95
ELEPHANT DISKETTES SS/DD (Boxes of 10)	$23.95
ELEPHANT DISKETTES DS/DD (Boxes of 10)	$39.95

NEC PERSONAL COMPUTER PRODUCTS

PC-8001A	Keyboard and processor unit, including 32K Ram, 24KB N-Basic Rom, cassette tape recorder interface, parallel printer interface, display interface	$749
PC-8012A	Modular expansion unit, including I/O bus extension, diskette adaptor, 32KB Ram, real-time clock, 8 priority interrupt levels, 8 slots for additional boards	$479
PC-8023A	Dot matrix printer—100 cps, bidirectional printing, proportional printer	$49
PC-8031A	Dual diskette unit, including two 163K byte diskette drives, interface cable, enclosure and operating system	$749
NEC General Accounting System		$259
NEC Accounts Receivable System		$259
NEC Inventory Control System		$259
NEC Payroll System		$259
NEC Job Cost System		$259
NEC Benchmark Word Processing		$329
NEC CP/M Operating System		$125
NEC Report Manager		$135
Data Base		$459

We carry the entire line of NEC/BPI software for the personal computer. Please call or write for information.

with NEW NEC-APC-$CALL

www.americanradiohistory.com

THE BEST PRICES IN THE NATION ON APPLE PERIPHERALS!

MBI APPLETIME CARD
WORKS WITH DB MASTER AND VISIDEX
MOUNTAIN HARDWARE COMPATIBLE $89

MBI VIP CARD
THE BEST GRAPHICS CARD
AVAILABLE WITH AN ADDITIONAL SERIAL PORT
(For Modem or 2nd printer) $129

WE'RE SMASHING THE PRICES ON APPLE COMPATIBLE DISK DRIVES

FORTH DIMENSION
APPLE COMPATIBLE DRIVES
PLUS ONE BOX OF ELEPHANT DISKETTES $289

FORTH DIMENSION
DRIVE WITH CONTROLLER
(including the Apple DOS Master and manual)
PLUS ONE BOX OF ELEPHANT DISKETTES $379

Call for prices on RANA and MICROSCI drives

80 COLUMN CARDS FOR APPLE

Wesper 80 Card	$259
Vision 80 Card (Vista)	$269
Videx 80 Card	$249

RAM CARDS

Davong 16K Card, Microtek, and Microsoft 16K Card ALL at ..... $ 79

T AND G PRODUCTS

Game Paddles	$ 29
Joy Stick	$ 44
Selecta-port Expander	$ 49

APPLE WORD PROCESSING

Screenwriter II *On line's Sensational!*	$ 89
Silicon Valley Systems	
Word Handler II	$159
List Handler	$ 79

Call for Continental, Dakin 5, Broderbund, Automated Simulations, Avant-Garde, Edu-Ware, Denver, Howard, Sirius Sensible, Synergistic Software, etc.

CALIFORNIA COMPUTER SYSTEMS

7710 Async Serial Int	$135
7490 GPIB (IEEE-488) Int	$239
7470 Ana to Dig Converter	$ 99
7711 Async Serial (Term)	$135
7712 Sync Serial Int	$149
7721 Apple Parallel Int	$109
Calendar/Clock Module	$ 99
Programable Timer	$ 99

MODEMS FOR APPLE

Hayes Micromodem II	$269
Novation Apple Cat II	$299
212 Apple Full Duplex (for Apple Cat II)	$329
212 Apple Cat	$629
212 Stand Alone Auto Cat	$599

BUSINESS SOFTWARE

VISICORP, INC.

Desktop Plan III	$229	Visidex	$189
Desktop Plan II	$189	Visiterm	$ 79
Visifiles	$189	Visicalc 3-3	$189
Visiplot	$159	Visipak	$539
Visitrend/Visiplot	$229		

STONEWARE

DB Master	$169
DB Utility Pack	$ 69

MOUNTAIN HARDWARE

CPS Multi-Function Card	$129
The Clock	$229
Supertalker	$159
Music System	$319
Expansion Chassis	$599
Romwriter	$139
Ram Plus	$149

MODEM SOFTWARE

Visiterm	$ 79
Transend II	$119
ASCII Express	$ 95

CPM FOR APPLE

Microsoft Z80 Softcard	$269

MISCELLANEOUS APPLE PRODUCTS

Enhancer II	$119 00
Sup R Mod	$ 27 95
System Saver	$ 79 00
Videx Function Strip	$ 69 00

CALL "THE COMPUTER-LINE"

(303) 279-2727
(303) 279-2848
1-(800)-525-7877

THE COMPUTERLINE, INC.
1019 8TH STREET GOLDEN, COLORADO U.S.A. 80401

SHOWROOM:
1136 S. COLORADO BLVD.
DENVER, CO 80222

Circle 111 on inquiry card.

TERMS

All prices reflect a 2 9% cash discount. All goods acknowledged faulty on receipt by the customer will be repaired or replaced at our discretion. Customers must call for an RMA number before returning any goods. This facilitates our quick attendance to faulty goods. We reserve the right to repair or return to the manufacturer for repair all goods becoming faulty within the specified warranty period. Any goods (hardware or software) returned for restocking are subject to a 10% restocking fee at our discretion. No returns on game software. We accept no responsibility for any false claims made by manufacturers. Prices quoted for stock on hand and subject to change without notice. Specialists in APO and international deliveries. Please add 2% (minimum $3.00) for shipping. APO add to all prices 5% for shipping (minimum $5.00). Please allow 10 working days plus mail time (if an order is mailed in for receipt of all UPS delivered goods. All goods (other than APO or international) delivered UPS ground.

All brands are registered trademarks.

www.americanradiohistory.com

Circles and Ellipses on the Apple II

Douglas Priest
8615 West 20th Ave.
Lakewood, CO 80215

Given a center point and a radius, the problem of constructing a circle is fairly simple. However, suppose you know only several points on a circumference. This makes things a bit more complicated, but it's nothing a trusty Apple II can't handle. Similarly, plotting an ellipse from the two foci and a point on the perimeter may seem tricky, but it is easily accomplished.

The programs in listings 1 and 2 perform these tasks on an Apple II using Applesoft BASIC. They are designed to be used as subroutines, with slight modifications, but they can be used by themselves to design graphic displays.

The first program (see listing 1) accepts three points, (X1, Y1), (X2, Y2), and (X3, Y3), and plots a circle on the screen. The perpendicular bisector of the line (X1, Y1), (X2, Y2) passes through the point

$$\left(\frac{X1 + X2}{2}, \frac{Y1 + Y2}{2}\right)$$

and has slope

$$A = \frac{-1}{(Y2 - Y1)/(X2 - X1)} = \frac{X1 - X2}{Y2 - Y1}$$

From this information, the program finds the y-intercept B. Using the same method, it calculates the slope C and y-intercept D of the perpendicular bisector of (X2, Y2), (X3, Y3). The intersection of the resulting lines, $Y = AX + B$ and $Y = CX + D$, is given by

$$X_c = \frac{D - B}{A - C} \quad \text{and} \quad Y_c = AX_c + B$$

The program then uses the distance formula to find a radius:

$$R = \sqrt{(X_c - X1)^2 + (Y_c - Y1)^2}$$

and plots a standard circle.

The second program (see listing 2) allows you to input two foci (F1 and F2) and a third point on the perimeter of the ellipse. By finding the distance from the first focus (see figure 1) to the point, and from the point to the second focus, and dividing this distance by 2, the program determines the semimajor axis. The length is also that of two sides of an isosceles triangle whose base is the line connecting the foci and whose altitude is the semiminor axis. The program finds this axis by first

UV EPROM ERASER
★ Erases over 15 EPROMS - 15 minutes erase time
★ Element life 7700 hours
★ Intensity: 12Ws ½cm² at 1"
★ Erases all UV EPROMS (2716, 2732, 2516, 2532, etc.)
$49.95*
*HOBBY MODEL

INDUSTRIAL MODEL
QUV-T8 / 2N
$68.95
WITH TIMER AND SAFETY SWITCH
QUV-T8 / 2T
$97.50
PROGRAMS: 2508, 2516, 2532, 2716, 27C16, 27C32, 2732A, 2758, 8748, 8749H, 8748H
OPTIONAL MODULES: 2564, 2764, 8755A, 8741
★ STAND ALONE, CRT, OR COMPUTER CONTROL
★ UPLOAD/DOWNLOAD IN MOTOROLA OR INTEL HEX FORMAT
★ MICROPROCESSOR BASED ★ 4 K INTERNAL RAM
★ 90 DAY PARTS & LABOR WARRANTY ON ALL PRODUCTS
SOON TO BE RELEASED:
PROMPRO-8 128K Version $689.
MONEY BACK GUARANTEE
INTELLIGENT PROGRAMMER STAND ALONE RS-232
★ RELIABLE
★ EASY COPY (No external equipment needed)
★ USER FRIENDLY
COMPATIBLE:
IBM PC, TRS-80, APPLE, CPM, FLEX, TEKTRONICS, MOS
(MCS-48) PROGRAMMING
PRICE INCLUDES PERSONALITY MODULE
$489.00
LOGICAL DEVICES INC.
781 W. OAKLAND PARK BLVD. • FT. LAUDERDALE, FL 33311
Phone Orders (305) 974-0967 • TWX: 510-955-9496
SEE US AT COMDEX SPRING - BOOTH #3019

Circle 248 on inquiry card.

www.americanradiohistory.com

We Have It!.. Computers, Disk Systems, Printers and Terminals

Call For Super Value On S-100 System With Dbl. Dens. 8"Drives!

INTERTEC SUPERBRAIN II
FREE MicroSoft Basic 80

Self contained computer with dual disks and two SR232C ports, complete with CP/M® 2.2

64K Jr.	$2099
64K QD	$2495
64K SD	$2949
10 Meg. DDS Hard Disk	$2995

VIDEO TERMINALS

SOROC IQ 120	$595
SOROC IQ 130	595
HAZELTINE ESPRIT	Call
HAZELTINE ESPRIT II	Call
HAZELTINE 1420	Call
HAZELTINE 1500	Call
HAZELTINE 1510	Call
HAZELTINE 1520	Call
TELEVIDEO 910C	Call
TELEVIDEO 912C	Call
TELEVIDEO 920C	Call
TELEVIDEO 925C	Call
TELEVIDEO 950C	Call
TEXAS INSTRUMENTS 940 Basic	$1299
TI 940 Package	$1699
TI 745 Portable Terminal	1249
INTERTEC INTERTUBE III	749
ZENITH Z19	729

PRINTERS

ANADEX DP-9001A	$1369
ANADEX DP-9501A	1429
PAPER TIGER IDS-445G *Special!*	599
PRISM PRINTER IDS-80 w/o color	1149
PRISM PRINTER IDS-80 w/color	1499
PRISM PRINTER IDS-132 w/color	1695
NEC 3510 RO, RS232C, 35 CPS. *Now*	1619
NEC 3530 RO, Cent. Inter., 35 CPS. *Only*	1859
NEC 7710 RO, RS232C, 55CPS	2375
NEC 7720 KSR, RS232C, 55CPS	2795
NEC 7730 RO, Cent. Inter., 55CPS	2375
QUME SPRINT 9/45 Ltd. or Full, 45CPS, RS232C, *Now*	1998
C. ITOH PRO WTITER, Parallel	549
C.ITOH PRO WRITER, Ser. & Par.	649
DIABLO 620 RO, RS232C, 20 CPS	1249
DIABLO 630 RO, RS232C, 55CPS	2299
CENTRONICS 730-1 Par. *New Low*	299
CENTRONICS 737-3 RS232C	389
CENTRONICS 704-11 Parallel	1695
CENTRONICS 704-9 RS232C	1595
CENTRONICS 122G Parallel, 120CPS	949
EPSON MX-80	489
EPSON MX-80FT	589
EPSON MX-100FT	789
EPSON RS232 Serial Interface	65
EPSON RS232/2K Buffer Interface	129
EPSON GRAFTRAX II	90
EPSON Apple® Printer Interface	75
TEXAS INSTRUMENTS TI 810 Basic.	1349
TI-810 Basic RS232C & Parallel	1395
TI-810 w/full ASCII, Vert. forms control, compressed print	1599
TI-820 RO Basic	1645
TI-820 KSR Basic	1839
TI-810 Package w/LQ	2099
OKIDATA MICROLINE-80	359
Tractor feed option	50
MICROLINE 82A	459
MICROLINE 83A	729
MICROLINE 84 Parallel	1149
MICROLINE 84 Serial	1249

MONITORS

ZENITH ZYM-121, 12" Green Phos.	115
AMDEK 100 12" *New Low!*	99
AMDEK 100G 12"Gr. Phos.	149
AMDEK 300 12"High Res.	179
AMDEK COLOR-1, 13"	339
AMDEK COLOR-II, 13" GRB Hi. Res.	755
AMDEK COLOR-III, 13" RGB	419
APPLE® Adapter for RGB	159

NorthStar™
Call For Prices

FLOPPY DISK SYSTEMS

MORROW DISCUS 2D Sng.,DD	898*
MORROW DUAL DISCUS 2D DD	1549*
MORROW DISCUS 2 + 2, 2 side, DD.	1239*
MORROW DUAL DISCUS 2 + 2	2139*
MORROW DUAL DMA DISCUS 2D	1619*

HARD DISK SUBSYSTEMS

MORROW DESIGNS	
DISCUS M5, 5 Meg. *New Low*	1559*
DISCUS M 10, 10 Meg.	3095*
DISCUS M26, 26 Meg.	3795*
CORVUS 5 Meg.	2375
CORVUS 12 Meg.	2969
CORVUS 18 Meg.	3799
MAEZON 5 Meg.	1695
MAEZON 10 Meg.	1949
MAEZON 15 Meg.	2799
INTERTEC 10 Meg. *Special!*	2999

*Includes CP/M®2.2 and MicroSoft Basic.

FLOPPY DISK CONTROLLER BOARDS

CROMEMCO 16 FDC, DD	499
NORTH STAR DD	479
MORROW DISK JOCKEY 2D, A&T	329
INTERSYSTEMS FDC-2, A&T	439
TARBELL DD, A&T	445
SYSTEMS GROUP DD, DMA	439

ESCON CONVERSION FOR IBM SELECTRIC

Complete w/microprocessor controller and power supply. Factory built. User installs solenoid assembly or it can be done at the ESCON factory.

RS232C Serial & Parallel	534
Cable for above	25

PROM PROGRAMMERS

SSM PB1 Kit	152
SSM PB1, A&T	225

MODEMS

NOVATION CAT, Acoustic	149
D-CAT, Direct Connect, (300 Baud)	155
AUTO CAT Auto Answer	219
APPLE CAT	329
D-CAT (1200 Baud)	599
103 JLP Auto Answer	219
DC HAYES MICROMODEM II (Apple)	339
HAYES SMART MODEM (300 Baud)	239
HAYES SMART MODEM (1200 Baud)	595
POTOMAC MICRO MAGIC (S-100)	339

CALIFORNIA COMPUTER SYSTEMS

Z80 CPU Board	269
Disk Controller 2422, w/CP/M®	359
16K Static, A&T	259
32K Static, A&T	399
64K Dynamic RAM	335
SYSTEM 2210 w/64K, CP/M® 2.2	1895

CPU BOARDS
(Assembled unless noted)

NORTHSTAR Z-80 (ZPB, A/A)	269
INTERSYSTEMS (MPU-80)	349
SSM CB1 8080, A&T	214
SSM CB2, Z-80 A&T	289
SSM CB2, Z-80 Kit	219
SYSTEMS GROUP Z-80 with I/O	419

MEMORY BOARDS

NORTHSTAR 16K RAM	199
H-RAM 64K	589
H-RAM 32K	419
CROMEMCO 16KZ	419
CROMEMCO 64KZ	595
CROMEMCO 256KZ	1095
MEMORY MERCHANT	
16K Static, 4 MHz	159
64K Static, 4 MHz	549
SYSTEMS GROUP	
DM6400, 64K Board	529
DMB6400, 64K Board	420
HDM2800, 128K Board	1095

GODBOUT (A&T)

CPU-Z	249
CPU 8085 88	359
RAM 20 32	359
RAM 17 64	510
RAM 21	1149
INTERFACE 1	215
INTERFACER 1	215
INTERFACER 2	215
DISK 1	425
SYSTEM SUPPORT 1	335
ENCLOSURE 2 (Desk)	699
ENCLOSURE 2 (RACK)	759

VIDEO BOARDS I/O Mapped

SSM VB2 I/O, Kit	169
SSM VM2 I/O, A&T	229
Memory Maped	
SSM VB1C, 16x64, Kit	152
SSM VB1C, 16x64, A&T	206
SSM VB3, 80 Char. 4MHz. Kit	359
SSM VB3, 80 Char. 4 MHz, A&T	419

APPLE® BOARDS

CALIFORNIA COMPUTER	
7710A Asynchronous Ser. Inter.	139
7712A Synchronous Ser. Inter.	149
7424A Calender Clock	99
7728A Centronics Printer Inter.	99

Call for price on MORROW MICRO DECISION and CROMEMCO SP-10

We stock a complete inventory of MAXELL, MEMOREX, SCOTCH and VERBATIM for all your Diskette requirements.

Write for free catalog.

MiniMicroMart, Inc.

943 W. Genesee St.
P.O. Box 2991 B
Syracuse, New York 13220

(315) 422-4467

TWX 710-542-0431

All prices F.O.B. shipping point, subject to change. All offers subject to withdrawl without notice. Advertised prices reflect a 2% cash discount (orders prepaid prior to shipment). C.O.D.'s & Credit Cards, 2% higher.

Circle 289 on inquiry card.

www.americanradiohistory.com

determining angle α using an inversion of the Law of Cosines:

$$\alpha = \cos^{-1} \frac{A^2 + B^2 - C^2}{2AB}$$

then applying the law again in the form

$$D = A^2 + \frac{B^2}{4} - 2A \frac{B}{2} \cos \alpha$$

The center of the ellipse is the point halfway between the foci. With this information, the program can now construct the ellipse.

Program Notes

Both programs set the origin (0, 0) in the bottom left corner. To restore it to the upper left, delete every "159 −."

Lines 30, 40, 70, and 80 in listing 1 will give the same result more efficiently if (X1 + X2)/2 (or Y1 + Y2, as the case may be) is substituted for (X2 − X1)/2 + X1. This change can also be made in listing 2, line 20.

Listing 1 uses the paddles to input the necessary points, while listing 2 uses the keyboard. However, any routine at the appropriate lines that return values for X1, Y1, X2, Y2, X3, and Y3 (for the circle program), or X1, Y1, X2, Y2, PX, and PY (for the ellipse program), can be substituted.

In listing 1, if all three points lie in a straight line, "NO SOLUTION" is printed. If part of a shape lies outside the screen boundaries, both programs continue plotting when the shape reenters the screen. ■

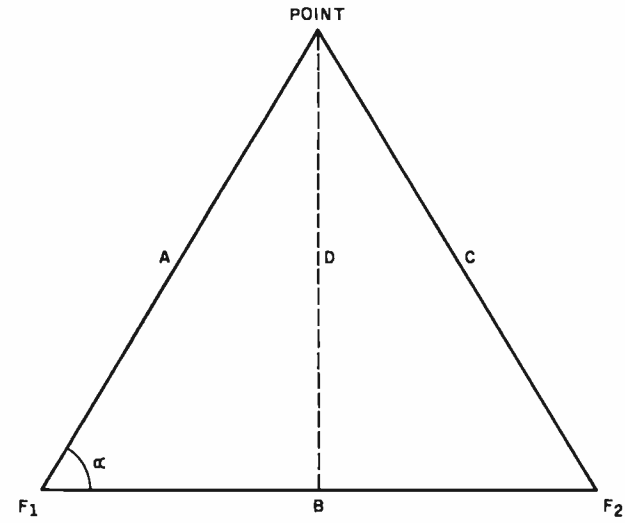

Figure 1: *Illustration of the method used to construct the ellipse. Enter the two foci (F1 and F2) and the point.*

Listing 1: *The circle program. Enter three points on the circle's perimeter and the program will draw the circle.*

```
10 P = 3.14159265
20  HGR : HCOLOR= 3: GOSUB 230
30 QX = (X2 - X1) / 2 + X1
40 QY = (Y2 - Y1) / 2 + Y1
50 A = (X1 - X2) / (Y2 - Y1)
60 B = QY - A * QX
70 QX = (X3 - X2) / 2 + X2
80 QY = (Y3 - Y2) / 2 + Y2
90 C = (X2 - X3) / (Y3 - Y2)
100 D = QY - C * QX
110  IF A = C THEN  TEXT : PRINT
     "NO SOLUTION": END
120 P1 = (D - B) / (A - C)
130 P2 = A * P1 + B
140 R =  SQR ((P1 - X1) ^ 2 + (P2
     - Y1) ^ 2)
150  HPLOT P1 + R,159 - P2
160  FOR O = 0 TO 2 * P STEP P /
     36
170 X = R *  COS (O) + P1:Y = 159
     - R *  SIN (O) - P2
180  IF X < 0 OR X > 279 OR Y < 0
     OR Y > 159 THEN 200
190  HPLOT  TO X,Y
200  NEXT O
```

Listing 1 continued on page 384

QUALITY
SERVICE
AVAILABILITY
ACTIVE, YOUR
NUMBER ONE
CHOICE
Active Electronic
Active Electronics
Your one stop source for the widest variety of factory fresh electronic components
FEATURING
THE 1982 I.C. MASTER
$39.95
WHILE QUANTITIES LAST
Extensive Product Offering
Semiconductors, Integrated Circuits, Microcomputer Boards, Microprocessor and Support Circuits, Transistors, Diodes, Capacitors, Resistors, Optoelectronics, Potentiometers, Relays, Multimeters, Switches, Knobs, Connectors, Sockets, P.C. Boards, Enclosures, Data and Reference Books, Soldering Aids, AND MUCH MORE
Superior Service
Greater choice. Easier, faster ordering and more reliable deliveries. Active's all NEW comprehensive Fall/Winter catalog is now available — FREE OF CHARGE. Circle No. 6 on free information card or write to: P.O. Box 8000, Westboro, MASS. 01581 U.S.A.
Call Toll Free 800-343-0874
MASS. customers call (617) 366-0500

Circle 6 on inquiry card.

www.americanradiohistory.com

With Chart-Master,™ creating quality graphics is as easy as apple pie.

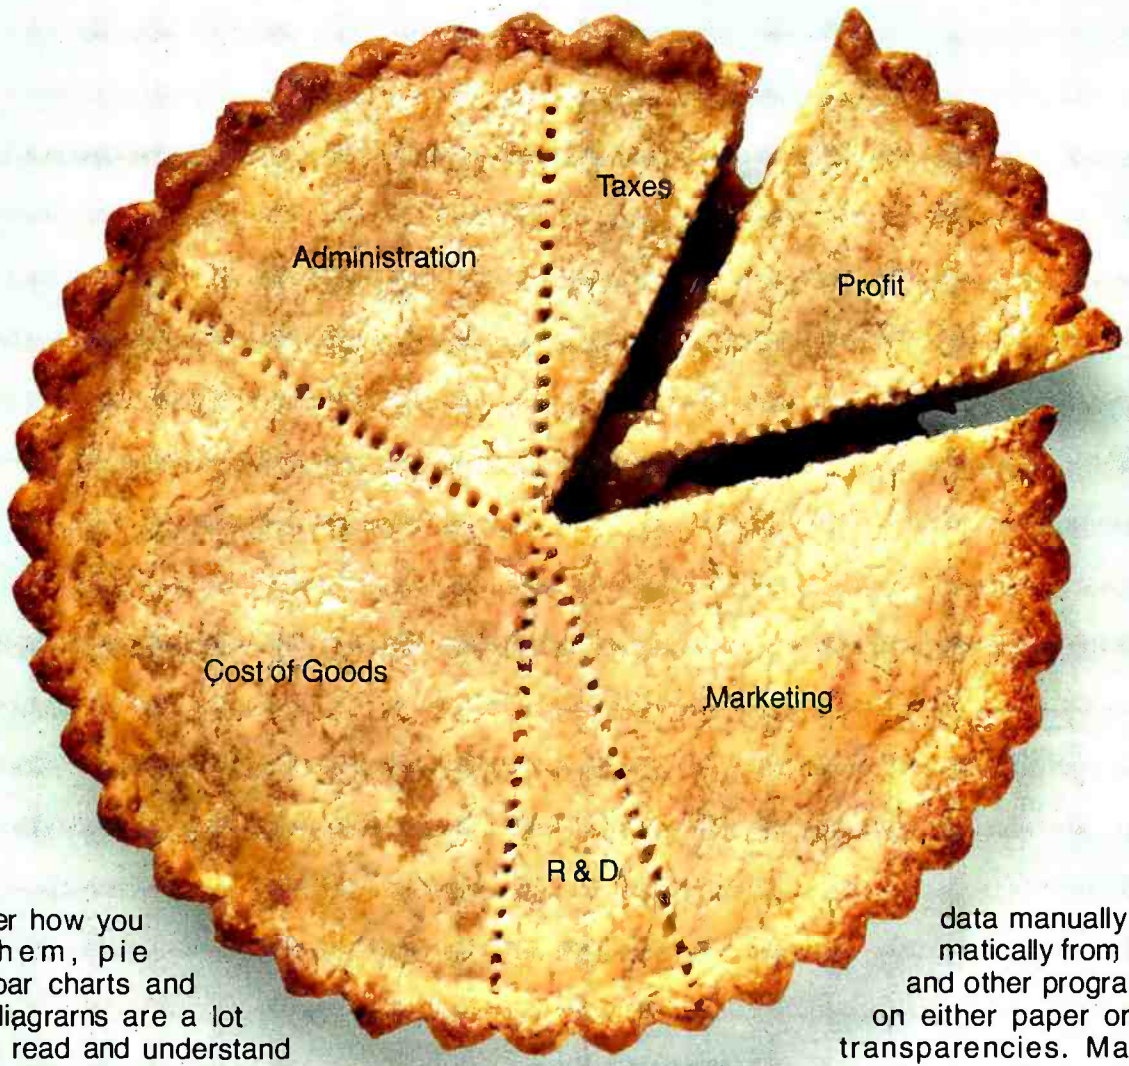

No matter how you slice them, pie charts, bar charts and scatter diagrams are a lot easier to read and understand than rows and columns of numbers. Now you can create colorful business graphics anytime you need them, with an easy-to-use Chart-Master graphics software program. A program that works with Hewlett-Packard plotters and your IBM® or Apple® personal computer.

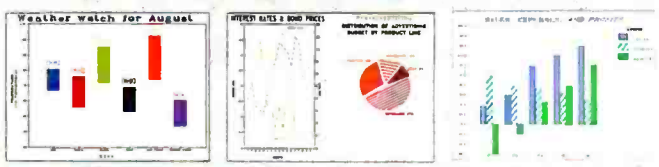

Values printed at data points; both left and right Y-axis scales; floating legends & bars; both horizontal & vertical formats; exploded pie sections.

Just enter your data, choose a chart format, preview the chart on your screen, and Chart-Master will automatically create a beautiful, presentation-quality chart. In seconds.

There's more to Chart-Master than simplicity. Incredible power and sophistication. You can enter data manually or automatically from Visicalc® and other programs. Print on either paper or acetate transparencies. Make your charts any size, anywhere on the page. Have your text appear in attractive print-quality type. Choose from sophisticated formats that include percentage bars, stock price (High/Low/Close) and area charts.

Power and ease-of-use. That's why Chart-Master is in daily use at major corporations like GE, Eastman Kodak, Exxon, Union Carbide, GM, AT&T, DuPont, 3M, Citibank, Motorola, Proctor & Gamble and GTE.

The retail price of Chart-Master is $375. For a complete information kit and name of your nearest dealer, contact Decision Resources, Inc., 21 Bridge Square, Westport, CT 06880. (203) 222-1974.

DecisionResources
Software Designed for Decision Makers

Visicalc is a trademark of Visicorp. Apple is a trademark of Apple Computer Inc.
IBM is a trademark of International Business Machines Corporation.

Circle 142 on Inquiry card.

www.americanradiohistory.com

MULTI-PROGRAMMER SYSTEM-10

Features:
- Dedicated keys and large display vocabulary for ease of use.
- I/O - 6 baud rates, 13 formats including Intellec, Textronix and Motorola.
- EPROMs, E²PROMs and bipolars.
- Gang option - programs eight at once.
- Remote control option.

$945

PROGRAMS OVER 250 DEVICE TYPES

NEW S-15 $645

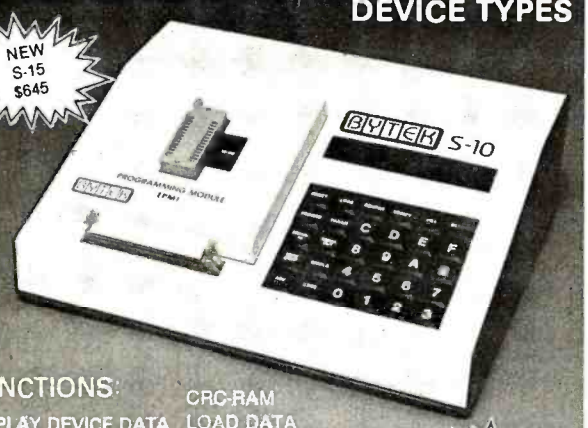

FUNCTIONS:
DISPLAY DEVICE DATA
EDIT RAM DATA
DEVICE PROGRAM
TYPE SELECTION
CRC-RAM
LOAD DATA
COMPARE FIELDS
FILL MEMORY FIELD
BLOCK MOVE
DIAGNOSTICS
and more.

GANG OPTION $545

BYTEK COMPUTER SYSTEMS CORP
2283 S. Federal Hwy. Delray Beach, FL 33444 (305) 272-2052

Powerful Lab Graphics For Your Apple II + ® Computer

SCIENTIFIC PLOTTER | VIDICHART™ | CURVE FITTER

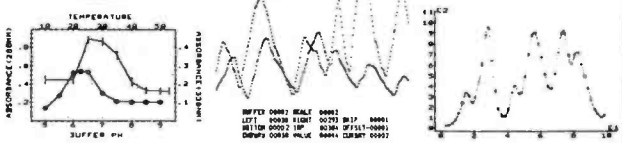

SCIENTIFIC PLOTTER — **48K APPLE II +, $25**
Draws professional-looking *graphs of your data.* EASIER, FASTER, NEATER and more ACCURATE than handplotting. *You choose data format, length and position of axes, 20 symbols, error bars, labels anywhere in 4 orientations, etc.* Includes 5 DEMOS on disk with 30-PAGE MANUAL.

CURVE FITTER — **48K APPLE II +, $35**
Selects the *best curve to fit your data.* SCALE, TRANSFORM, AVERAGE, SMOOTH, INTERPOLATE (3 types), LEAST SQUARES FIT (3 types), EVALUATE UNKNOWNS from fitted curve. Includes 5 DEMOS on disk with 33-PAGE MANUAL.

VIDICHART™ — **48K APPLE II +, $75**
NEW tools for *lab data management.* FAST plots of 4 data sets with SCROLLING in 4 directions, ZOOM scaling on X and Y axes, 2 types of graphic CURSORS and on-screen STATUS REPORT. PLOTS A/D INPUT *while sampling.* ADD, SUBTRACT, MULTIPLY, DIVIDE, INTEGRATE, DIFFERENTIATE, AVERAGE or NORMALIZE data sets with SIMPLE COMMANDS. *Ideal for spectra, chromatograms, rate curves, etc.* Includes SAMPLE DATA on disk with 28-PAGE MANUAL.

SPECIAL! All 3 programs on one disk, only $120. Since each program uses the same data format on disk, data may be shared.

BUY THESE PROGRAMS AT YOUR LOCAL DEALER OR ORDER DIRECT. For more information, ask for FREE brochure or send $5 for any manual ($12 for all 3), deductible with purchase. Add $1.50 shipping on all orders. For fastest service, call in your VISA or Master Card order.

INTERACTIVE MICROWARE, INC.
P.O. Box 771, Dept. B State College, PA 16801
CALL (814) 238-8294 for IMMEDIATE ACTION

® Trademark of Apple Computer, Inc.

System Notes

Listing 1 continued:

```
210  END
220  REM  INPUT FROM PADDLES (PRE
     SS BUTTON TO ACCEPT POINT)
230  PRINT "POINT 1:";: GOSUB 270
     : PRINT X","Y:X1 = X:Y1 = Y
240  PRINT "POINT 2:";: GOSUB 270
     : PRINT X","Y:X2 = X:Y2 = Y
250  PRINT "POINT 3:";: GOSUB 270
     : PRINT X","Y:X3 = X:Y3 = Y
260  RETURN
270 X =  INT ( PDL (0) * 1.095):Y
      =  INT ( PDL (1) * .625)
280  HCOLOR= 3: HPLOT X,Y: IF  PEEK
     ( - 16287) > 127 THEN 300
290  HCOLOR= 0: HPLOT X,Y: GOTO 2
     70
300  IF  PEEK ( - 16287) > 127 THEN
     300
310 Y = 159 - Y: RETURN
```

Listing 2: *The ellipse program. Enter the two foci and a point on the perimeter. The program will draw the ellipse based on the location of the points.*

```
 10  HGR : HCOLOR= 3: GOSUB 160:P =
     3.14159265
 20 OX = (X2 - X1) / 2 + X1:OY = (
     Y2 - Y1) / 2 + Y1
 30 N =  SQR ((X1 - PX) ^ 2 + (Y1 -
     PY) ^ 2) +  SQR ((X2 - PX) ^
     2 + (Y2 - PY) ^ 2)
 40 A = N / 2
 50 B =  SQR (A ^ 2 - ((X1 - OX) ^
     2 + (Y1 - OY) ^ 2))
 60 Q =  ATN ((Y2 - Y1) / (X2 - X1
     ))
 70  HPLOT OX,159 - OY
 80  FOR Q = 0 TO 2 * P STEP P / 3
     6
 90 R = A * B /  SQR ((A *  SIN (Q
     )) ^ 2 + (B *  COS (Q)) ^ 2)
100 X = R *  COS (Q + 0) + OX:Y =
     R *  SIN (Q + 0) + OY
110  IF X < 0 OR X > 279 OR Y < 0
     OR Y > 159 THEN 130
120  HPLOT  TO X,159 - Y
130  NEXT Q
140  END
150  REM  INPUT (FROM KEYBOARD)
160  INPUT "FIRST FOCUS:";X1,Y1
170  HPLOT X1,159 - Y1
180  INPUT "SECOND FOCUS:";X2,Y2
190  HPLOT X2,159 - Y2
200  INPUT "POINT:";PX,PY
210  HPLOT PX,159 - PY
220  RETURN
```


www.americanradiohistory.com

Everybody's making money selling microcomputers. Somebody's going to make money servicing them.

New NRI Home Study Course Shows You How to Make Money Servicing, Repairing, and Programming Personal and Small Business Computers

Seems like every time you turn around, somebody comes along with a new computer for home or business use. And what's made it all possible is the amazing microprocessor, the tiny little chip that's a computer in itself.

Using this new technology, the industry is offering compact, affordable computers that handle things like payrolls, billing, inventory, and other jobs for businesses of every size...perform household functions including budgeting, environmental systems control, indexing recipes. And thousands of hobbyists are already owners, experimenting and developing their own programs.

Growing Demand for Computer Technicians

This is only one of the growth factors influencing the increasing opportunities for qualified computer technicians. The U.S. Department of Labor projects over a 100% increase in job openings for the decade through 1985. Most of them *new* jobs created by the expanding world of the computer.

Learn at Home in Your Spare Time

NRI can train you for this exciting, rewarding field. Train you at home to service not only microcomputers, but word processors and data terminals, too. Train you at your convenience, with clearly written "bite-size" lessons that you do evenings or weekends, without going to classes or quitting your present job.

Your training is built around the latest model of the world's most popular computer. It's the amazing TRS-80™ Model III, with capabilities and features to perform a host of personal and business functions. No other small computer has so much software available for it, no other is used and relied on by so many people. And it's yours to keep for personal or business use.

You get plenty of practical experience. Using the NRI Discovery Lab® that also comes as part of your course, you build and study circuits ranging from the simplest to the most advanced. You analyze and troubleshoot using the professional 4-function LCD digital multimeter you keep to use later in your work. Then you use the lab and meter to actually access the interior of your computer...build special circuits and write programs to control them. You "see" your computer at work and demonstrate its power.

Computer Assisted Instruction

Your TRS-80 even helps train you. You receive 4 special lesson tapes in BASIC computer language. Using them in your microcomputer, you "talk" to it as you progress. Errors are explained, graphics and animation drive home key points. Within a matter of minutes, you'll be able to write simple programs yourself.

(TRS-80 is a trademark of the Radio Shack division of Tandy Corp.)

Become the Complete Computer Person

In addition to training in BASIC and advanced machine language, you gain hands-on experience in the operation and application of computers to business and personal jobs. You're trained to become the fully rounded, new breed of technician who can interface with the operational, programming and service facets of today's computers. You're ready to take your place in the new electronic age.

Other Opportunities

NRI has been giving ambitious people new electronic skills since 1914. Today's offerings also include TV/Audio/Video Systems servicing with training on our exclusive Heath/Zenith computer-programmable 25" diagonal color TV...Industrial Electronics, Design Technology...and other state-of-the-art courses.

Free Catalog...Mail Card No Salesman Will Call

Send the postage-paid card for our 100-page catalog showing all courses with equipment and complete lesson plans. There's no obligation other than to yourself. See how NRI can help you grow with the most exciting and important new field of the 80's. If card has been removed, please write to us.

NRI Schools
McGraw-Hill Continuing Education Center
3939 Wisconsin Ave.
Washington, DC 20016

We'll give you tomorrow.

www.americanradiohistory.com

SAVE BIG with Palomar!

APPLE SYSTEMS SPECIAL

Apple-Compatible 48K Computer with TEAC Super 5 Disk Drive and Controller, BMC 12" Green Screen Monitor . . . **NOW—$1,255.00**

Same system with a 64K Franklin Ace 1000 ..... $1,525.00
Same system with a 48K Apple II Plus $1,595.00

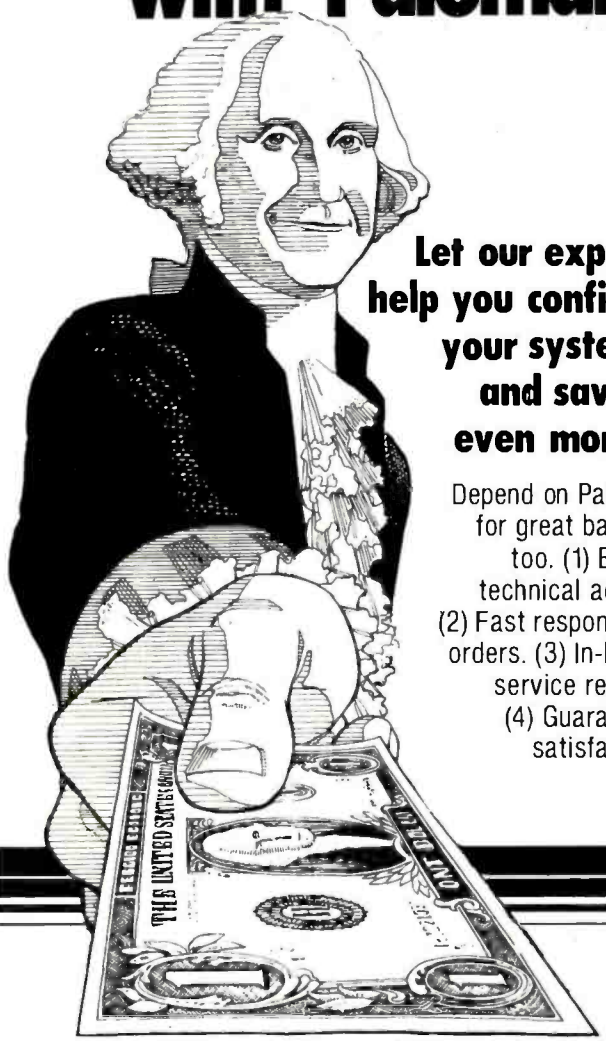

Let our experts help you configure your system and save even more!

Depend on Palomar for great backup, too. (1) Expert technical advice. (2) Fast response on orders. (3) In-house service repairs. (4) Guaranteed satisfaction.

MODEMS

HAYES

Micromodem II (Apple II)	289.00
Micromodem II With Terminal Program	315.00
Micromodem 100 (S-100)	339.00
Smartmodem (RS-232)	225.00
Chronograph (RS-232)	195.00
Terminal Program	75.00

UDS

103 LP Direct	175.00
103 JLP Auto Answer	209.00
202 SLP 1200 BAUD	255.00
212 LP	469.00

NOVATION

CAT (Acoustic)	145.00
D-CAT	159.00
J-CAT	139.00
Smart CAT (300)	215.00
212 Auto CAT	599.00
Apple CAT II	299.00
212 Apple CAT	609.00
Expansion Module	35.00
Handset	27.00
Firmware ROM	27.00

Order Toll-Free!

PRINTERS

COMREX

Comriter CR-1C	CALL
Tractor Feed	89.00

EPSON

ASAP 2K Serial	59.00
Comrex 4K Serial Buffer	139.00
Microbuffer-16K Parallel	139.00
Microbuffer-8K Serial	139.00

NOVELL

Image 800	999.00

OKIDATA

Microline 82-A	489.00
Microline 83-A	689.00
Microline 84-S	1199.00
Microline 84-P	1059.00
2K Parallel Interface	129.00
Forms Tractor (82-A)	55.00

OLYMPIA

COMPACT Serial Interface	849.00
ES 100 KRO	949.00
ES 100	699.00
Serial/Parallel Interface	250.00
CCS Apple Serial Card	135.00

NEC

3510 RO Serial	1515.00
3520 KSR Serial	2100.00
3530 RO Parallel	1695.00
3550 RO IBM	1880.00
7710 RO Serial	2325.00
7730 RO Parallel	2395.00
8023-A Dot Matrix	489.00
Bi-Directional Tractor (3500)	230.00
Cut Sheet Guide (3500)	90.00

SILVER REED

EXP 550 Serial/Parallel Interface	695.00

SMITH CORONA

TP-I	599.00

TEC

PMC 8510 Parallel	465.00
PMC 8510 Serial	585.00
ITOH 8510-A Parallel	469.00
ITOH 8510-A Serial	619.00
ITOH 1550 Parallel	750.00
ITOH 1550 Serial	789.00
ITOH F-10-40	1395.00
ITOH F-10-55	1795.00

STAR MICRONICS

Gemini 10	CALL
Gemini 15	CALL

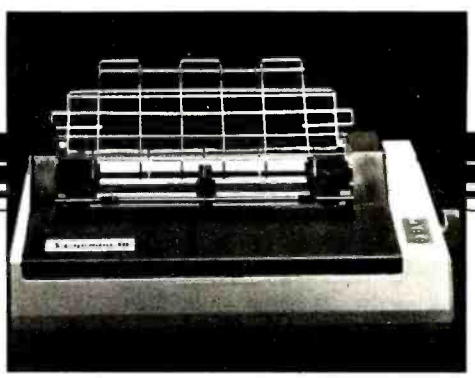

Many items are not listed. Please call our 800 number if you don't see what you're looking for.

www.americanradiohistory.com

PERSONAL COMPUTERS

ALTOS
ACS 8000-2 .....3199.00
ACS 8000-15 .....4399.00

APPLE
Apple II Plus .....CALL
Disk II D.O.S. 3 .....CALL
Disk II .....CALL

BASIS
108-0003 (64K) 1895.00
108-0004 (128K) 1995.00

CHAMELEON
IBM-Compatible 1995.00

IBM
IBM PC .....CALL

MORROW
Micro Decision with Terminal & 1 Drive 1790.00
Micro Decision with Terminal & 2 Drives 2140.00

XEROX
820 with CP/M, Wordstar 1995.00

KAYCOMP
Kaypro Portable, Includes $250 Extras 1795.00

FRANKLIN
ACE 1000 (64K) .....CALL
ACE 10, Disk Drive .....CALL

OSBORNE
Osborne I Portable, Includes $200 Extras 1795.00
With Double Density Drives 1995.00

SYSCOM
Syscom 48K, Apple Compatible 799.00

TELEVIDEO
TS 802 .....3119.00
TS 806 .....5735.00
TS 816 .....10365.00

VICTOR
9000 (SS) 2 Single-Sided Drives ..3495.00
9000 (DS) 2 Double-sided Drives 4295.00
9000 (HD) 1 Double-sided Drive, 10 Mb Hard Disk 5595.00

APPLE

HARDWARE
ALS Z Card 159.00
ALS CP/M Card 379.00
ALS CP/M Card with SuperCalc 595.00
PCPI Appli-card, Z 80 Card 395.00
PCPI 88 Card—16K CPU 659.00
ALS Z Card, with SuperCalc 389.00
CCSIEEE Card 175.00
CCS Analog/Digital Card 105.00
CCS 12K ROM/PROM Module 109.00
CCS Programmable Timer 105.00
Comrex Clock Card 69.00
CPS Multi/Analog Card 179.00
Echo II Speech Synthesizer 125.00
EDP AC Surge Protector 49.00
EDP EMI-RFI Filter 39.00
Expandaport-6 Ports With Speaker 55.00
Hayes MicroModem II 299.00
Microbuffer II 16K 219.00
Microbuffer II 32K 245.00
Microsoft Z80 Softcard 265.00
Microtek 16K Ram Card 79.00
Microtek Parallel Printer Card 69.00
STB 128K Memory Card 399.00
System Saver-Fan/Outlets/Switch 79.00
TG Game Paddles 29.00
TG Joy Sticks 45.00
TG Select-A-Port 45.00
Videx 80 Column Card 279.00
Videx Enhancer II (Rev. 7) 119.00
Videx FunctionStrip 85.00
Viewmax 80 249.00

SOFTWARE
BUSINESS
d Base II 539.00
The Home Accountant 55.00
Sensible Speller 99.00
pfs: 89.00
pfs: Report 89.00
pfs: Graph 89.00
Super Calc 235.00
D.B. Master 179.00
D.B. Master Utility Pak #1 79.00
D.B. MasterUtility Pak #2 79.00
VisiCalc 205.00
VisiSchedule 249.00
Letter Perfect 109.00
Data Perfect 75.00
Supertext 40/58/70 99.00
PERSONAL & HOME
Algebra I 29.00
Algebra II 29.00
CompuMath: Arith Skill 39.00
CompuSpell (Req Data Disk) 21.00
CompuRead 21.00
S.A.T. Word Attack Skill 39.00
Graph Magic 99.00
Crossword Magic 39.00
Tax Manager 119.00
Typing Tutor 19.00
SYSTEMS & UTILITIES
Apple Mechanic 21.00
DOS Boss 16.00
Utility City 21.00
S.A.M. 99.00
Apple Soft Compiler 135.00
Basic Compiler 299.00
The Artist 59.00

MONITORS

BMC
BM-12AU 12" Green 89.00
BM-12 EUN 12" Green 149.00
BM-1401 RGB with Card and/or Cable 399.00
BM-AU919U Color, Composite Sound 399.00
BM-AU9191U RGB for IBM-PC 759.00

COMREX
CR 5500-12" Green 155.00
CR 6500-13" Composite 315.00
CR 6600-13" RGB 429.00

ELECTROHOME
13" RGB 339.00
13" Hi Res. RGB 589.00
Apple II Interface 199.00
IBM 16 Color Cable 35

TAXAN
KG 12N-12" Green .....CALL
KA 12N-12" Amber .....CALL
RGB Vision I-12" RGB .....CALL
RGB Vision III-12" RGB .....CALL
RGB Apple II Card .....CALL
RGB II Apple II Card with Text Color .....CALL

ZENITH
12" Green 119.00

NEC
PC-8041A-12" Green 159.00

AMDEK
Video 300-12" Green 165.00
Color I -13" Color Composite 349.00
Color II -Hi Res. RGB 749.00
Color III -Lo Res. RGB 439.00
RGB Apple II Card 165.00

SANYO
9" Hi Res. Green 159.00
12" Green Screen 135.00
12" Hi Res. Green 209.00
13" Color 419.00
13" Hi Res. Color 899.00

U.S.I.
9" Green Screen 119.00
9" Amber Screen 155.00
12" Green Screen 155.00
12" Amber Screen 175.00

P.G.S.
12" Hi-Res RGB for IBM 759.00

IBM

HARDWARE
IBM PC .....CALL
Amdek Color II RGB Monitor 799.00
Amdek 3" Dual Disk Drive 785.00
BMC 12" Green Monitor 149.00
BMC Color Composite Monitor with Sound 399.00
BMC Hi-Res RGB Monitor 759.00
Computer Peripherals I/O Printer Interface (4 Ports) 159.00
Computer Peripherals 64 I/O Memory Card 299.00
Corona 5MB Winchester .....CALL
Corona 10MB Winchester .....CALL
M & R SuperMod/5 .....59.00
Micro Buffer In Line, (32K) 259.00
Percom Add On DiskDrive (Dual) 450.00
PGS Hi-Res RGB 12" Monitor 759.00
PMC Disk Drive 199.00
Ram Plus Quad Board 449.00

SOFTWARE
BUSINESS
d Base II 499.00
Denver Accounting System 549.00
Easy Filer 295.00
Easy Planner 145.00
Easy Speller 129.00
Easy Writer II 259.00
VisiCalc 205.00
VisiTrend/Plot 249.00
VisiDex 205.00
VisiFile 249.00
Business Forecasting Module 85.00
Desktop Plan 249.00
Visischedule 249.00
HOME & PERSONAL
The Home Acccount + ...109.00
Money Decisions 145.00
Mathmagic 65.00
Graphmagic 65.00

DISK DRIVES

Corona 5MB Winchester .....CALL
Corona 10MB Winchester .....CALL
Disk II With Controller Card .....CALL
Media Distributing 11 Mb Winchester Subsystem 2,595.00
Media Distributing 22 Mb Winchester Subsystem 3,495.00
Microsci A35 .....375.00
Microsci Controller Card 99.00
Rana Disk Drive 319.00
Rana Controller 109.00
TEAC Super 5 Disc Drive 299.00
TEAC Super 5 Controller Card 89.00
TEAC Super 5 Double-sided Disk Drive 429.00
TEAC Super 5 Controller Card for Double-sided Disk Drive 109.00

Palomar is pledged to your satisfaction.

Palomar makes buying easy ...

ORDER TOLL-FREE! Call
800-237-3333
In California call 800-338-5555

Telex 697120-150

TERMS OF SALE: Cash, Check, money order, bank wire transfer, credit card, or purchase orders from qualified firms and institutions. Please include telephone number with order and expiration date on credit card orders. California residents add 6% sales tax. Advertised prices are for prepaid orders F.O.B. shipping point. Add 3% or $3.00 minimum for shipping in the U.S. Pricing and availability subject to change without notice. Address written orders to:

910-105 W. San Marcos Blvd., San Marcos, CA 92069

PALOMAR
COMPUTER PRODUCTS

Circle 337 on inquiry card.

www.americanradiohistory.com

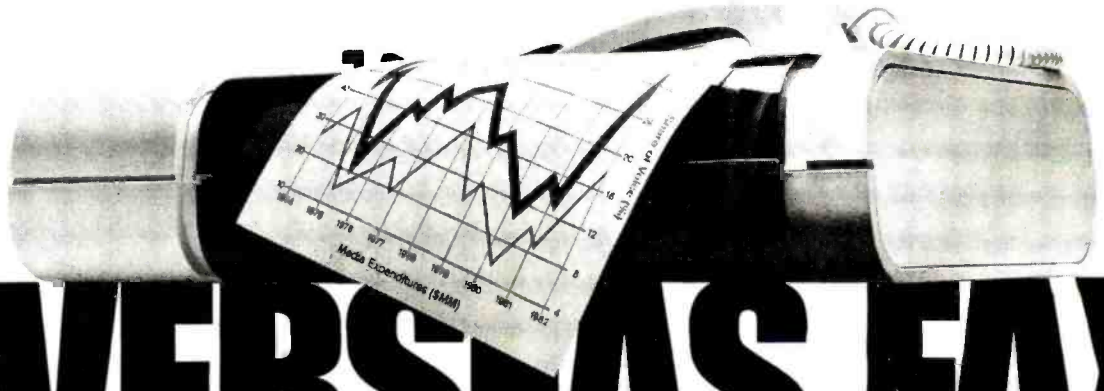

OVERSEAS FAX. THE BEST WAY TO GIVE THEM THE PICTURE.

An exact copy. Fax is the only system that sends it most anywhere in the world. Speed. Economy. Confidentiality. Fax puts it together like no other system can.

All you need to send hard copy overseas is a telephone and a facsimile machine. The same machine you may already be using domestically. The price of a Fax transmission is the price of a call. And our 1-minute overseas minimum makes it more economical than ever. See the chart for sample rates.

Send signed documents. Graphs. Pictures. Fax transmits an exact duplicate from your original. Sending them requires no special training or personnel. Send them any time.

Many terminals can receive without an operator. Send them with Fax. It's the only way for hard copy to travel.

For a free brochure, call toll free 1 800 874-8000 or write: Fax Facts, P.O. Box 397, East Brunswick, NJ 08816-0397.

Times and costs to transmit a 400-word page to Europe.*

TRANSMISSION TIMES**	COST		
	Std. Tel Rate (7am-1pm)	Dis. Tel Rate (1pm-6pm)	Econ. Tel Rate (6pm-7am)
1 MINUTE	$2.37	$1.78	$1.42
3 MINUTES	$5.03	$3.78	$3.02
6 MINUTES	$9.02	$6.78	$5.42

*Similar attractive rates to other areas.
**Transmission times vary depending on type of equipment used.

Bell System

www.americanradiohistory.com

Keywords in a Fuzzy Context

CBASIC programs for bibliographic search that will tell you the degree to which various articles meet your requirements.

Thomas A. Smith
1525 Lyndhurst Ave.
Camarillo, CA 93010

I used to rack my brain trying to remember where I had read an article that contained just the information I needed for one project or another. I knew I'd read it somewhere, but I was at a loss to recall the source. As my library of periodicals grew, so did my frustration.

Then I read an article (see reference 1) in which the author, Ronald Yager, described the use of *fuzzy-set* theory in searching a bibliography. Needless to say, I had found the elegant solution to my problem. The next step was to realize Yager's brainchild by implementing it.

Shortly afterward, I began writing a set of programs in CBASIC. In writing them, I set myself several goals: to adhere to the description in Yager's article, to minimize the amount of computer memory required, and to make the programs user-friendly and crash-proof. To my surprise, I found that achieving the third goal required much more effort and code than I had anticipated.

The advantage of applying fuzzy-set theory to a bibliographic search is that you can ask for references to articles that satisfy more than one criterion. You formulate your interrogation as a logical connection of concepts; the bibliographic search system uses fuzzy-set theory to interpret the interrogation and gives you information on the degree to which the articles in the bibliography satisfy it. Then the system lists those articles that meet various criteria to the degree you had specified.

Fuzzy sets allow you to introduce the "degree of belonging" concept.

The search system also includes programs to build and modify both the bibliography file and an associated file containing descriptive keywords for the library. A third file, built interactively when a new library is first established, describes the record structure of the bibliographic and keyword files and contains other program initialization data. Other utility programs list the keyword vocabulary to the console or printer and compress a bibliographic file after many record deletions have been made.

Why Fuzzy Sets?

For bibliographic searching, fuzzy sets are clearly superior to normal Boolean sets. In classical set theory, a variable can assume only two values: true or false, one or zero. An element either belongs to a set or does not. Fuzzy sets allow me to introduce the "degree of belonging" concept and still retain the ability to perform the logical operations equivalent to the AND, OR, NOT, and IMPLICATION of two-valued logic.

Two-valued logic lets me search a bibliography (with descriptive keywords attached) for all articles described as, say,

(entertaining
OR educational)
AND NOT lengthy.

But this kind of search can provide no information on *how* entertaining,

www.americanradiohistory.com

Boolean Operation	Fuzzy Notation	Fuzzy Definition
x AND y	x * y	min(x,y)
x OR y	x + y	max(x,y)
NOT y	(y)'	1 − y
x IMPLIES y	x # y	max(1 − x,y)

Table 1: *Notation and definition for fuzzy-set operations.*

educational, or lengthy the reported articles are. The use of fuzzy sets, however, lets me qualify each keyword descriptor by a numeric indication, in the range of 0 to 1, for the degree to which the keyword applies to an article. In addition, when I interrogate the bibliography I can now qualify each keyword I use in the search with a number between 0 and 1 to indicate the importance of that quality to me for this search.

For the sake of illustration, let's recast the two-valued example above into one using fuzzy sets. Let's suppose that one of the articles in the bibliography is described as entertaining (0.5), educational (0.8), and lengthy (0.3). Let us further suppose that I interrogate the bibliography with the following interrogation phrase:

(entertaining (0.2)
OR educational (0.9))
AND NOT lengthy (1.0)

For each of the articles in the file, the search process will first perform a logical AND on the values of corresponding keywords in the interrogation and in the article descriptors, and replace the keywords in the interrogation phrase with the results. Carrying out this expansion for our example, we have

((0.2 AND 0.5)
OR (0.9 AND 0.8))
AND NOT (1.0 AND 0.3)

When we reduce this expression using the definitions in table 1 for fuzzy operations, we obtain, in three steps:

(0.2 OR 0.8) AND NOT (0.3)
0.8 AND 0.7
0.7

This article, then, would be rated as satisfying my interrogation request at the 0.7 level. If the search had encountered a second article with the same keywords and descriptors except that its length had a value of 0.9, it would have received a rating of 0.1. The difference in ratings reflects the importance I attached to brevity.

A traditional search can provide no information on how entertaining, educational, or lengthy the reported articles are.

This is the basis for the method used in the bibliographic search system. The actual method employed is somewhat more flexible because the interrogation phrase is entered as a logical connection of concepts. The concept words need not be in the keyword vocabulary; the program asks you to define each concept in terms of keywords from the vocabulary and ratings associated with the keywords. Thus, using the fuzzy symbology from table 1, I could have produced the same results as in the last example by either of two sequences:

An interrogation phrase of ((entertaining+educational)* (lengthy)') followed by defining the concepts as
entertaining: entertaining 0.2
educational: educational 0.9
lengthy: lengthy 1.0

An interrogation phrase of (entertaining*(lengthy)') followed by defining the concepts as
entertaining: entertaining 0.2
educational 0.9
lengthy: lengthy 1.0

It is important to note that the only link between words (concepts) in the interrogation phrase and keywords in the bibliographic file is that established by the list of concept definitions. In effect, this allows us to redefine a keyword, as we did with the word "entertaining" in the second sequence above.

System Overview

The bibliographic search system consists of seven separate programs chained together (using the CBASIC CHAIN statement to transfer control) under control of a main driver, BIBLIO, shown in listing 1. BIBLIO first reads a file of initialization data, then displays the menu of functions available, and finally executes the selected function. If there is no initialization data on file, the main driver will call the program PARMS (see listing 2), which interacts with the user to define the system parameters as a file called <library>.DEF. The term <library> denotes a user-chosen name that applies to all files associated with a particular bibliography; <library>.VOC, the second of three necessary files, contains the vocabulary of keywords and is built or modified by the program VOCBLD (see listing 3). After VOCBLD has executed, it automatically chains to the program VOCLST (see listing 4), which will list the keywords on the console or printer. VOCLST may also be called independently from the main menu.

To increase the efficiency of searching the list of keywords, the file <library>.VOC is maintained in lexicographic order. BIBBLD (see listing 5) builds and modifies the file of articles, <library>.BIB. No ordering is maintained in this file; articles are added by appending them to the end of the file. The program deletes articles by serially reading and displaying

www.americanradiohistory.com

records of articles from the <library>.BIB file, letting the user designate records for deletion, and substituting five Zs for the first five characters of the first field of the designated records. Records so marked are ignored when the file is searched for articles. When enough records have been marked to make it wise to do so, the user runs CMPRBIB (see listing 6) to compress the <library>.BIB file. This program reads and rewrites the <library>.BIB file and eliminates all records marked for deletion, thus reclaiming wasted disk space.

The heart of this system of programs is the function that searches the bibliography file. This has been split into two programs, BIBSRCH (see listing 7) and BIBSR2 (see listing 8). BIBSR2, a continuation of BIBSRCH, has been split from it to conserve memory. The user initiates a search by entering an interrogation phrase that consists of one or more words (concepts) joined or modified by logical operators. Parentheses establish precedence for the operations. Permissible operators are the fuzzy equivalents, defined in table 1, of the Boolean AND, OR, NOT, and IMPLICATION operators. The user is then prompted to define each of the concepts he has entered in terms of keywords found in the keyword vocabulary for the library to be searched. Next, the search routine scans the <library>.BIB file of articles, calculating and recording the degree to which each article satisfies the interrogation phrase. Then the program displays the number of articles that meet or exceed each of the 11 possible degrees of satisfaction (0.0, 0.1, 0.2 . . . 1.0). Next, the user is asked for a minimum satisfaction threshold; the program then retrieves and lists all articles that meet or exceed this threshold.

The system parameter file, <library>.DEF, is generated by the program PARMS and read by the initialization section of BIBLIO. Composed of numeric data only, it is read and written in serial fashion. Lines 37–46 of listing 1 define the items in this file. The keyword vocabulary file, <library>.VOC, contains fixed-length records, each record holding

Listing 1: *BIBLIO, the driver routine for the bibliographic search system, initializes the system parameters, displays a menu of functions, and chains to the selected function.*

```
1:   REM ----------FILE BIBLIO.BAS
2:
3:   REM         ******** FUZZY BIBLIOGRAPHIC SEARCH ********
4:   REM         *   Written by: Thomas A. Smith           *
5:   REM         *              1525 Lyndhurst Ave.,       *
6:   REM         *             Camarillo, CA 93010         *
7:   REM         ***********************************************
8:
9:   REM MAIN DRIVER AND MENU
10:
11:  REM SET UP COMMON FOR CHAINING
12:  %CHAIN 40,4000,0,600
13:  COMMON KEYWD$(1),LIBNAME$,RLENZ,TRUE%,AUTH.LEN%,TITL.LENZ
14:  COMMON MAXBIB%,MAXDESC%,MAXDEF%,MAXKEYS%,MAXCON%,CONCEPT$(1)
15:  COMMON ISS.LEN%,CLS$,ERR%,JOUR.LEN%,KWD.LEN%,CMD$(1)
16:  COMMON LFT%(1),RGHT%(1),CON.KEY%(2),CON.RATE(2),QUERY$,L%
17:
18:  REM INITIALIZE
19:  IF LEN(LIBNAME$)=0 THEN \
20:    LIBNAME$=COMMAND$
21:  CLS$=CHR$(31) : TRUE%=-1
22:  PRINT CLS$
23:  IF LEN(LIBNAME$)=0 THEN \
24:    INPUT "PLEASE ENTER LIBRARY NAME: ";LIBNAME$
25:
26:  REM IF NO DEFINITIONS ON FILE GO TO DEFINITION MODULE
27:  IF END #3 THEN 14
28:  OPEN LIBNAME$+".DEF" AS 3
29:  IF SIZE(LIBNAME$+".DEF")=0 THEN \
30:    DELETE 3 : CHAIN "PARMS"
31:  GOTO 13
32:  14 CHAIN "PARMS"
33:
34:  13 REM OTHERWISE READ DEFINITIONS
35:  IF END #3 THEN  12
36:  READ #3;   \
37:  MAXKEYS%,  \              REM MAX NUMBER KEYWORDS IN VOCABULARY
38:  MAXDESC%,  \              REM MAX KEYWORDS PER BIBLIO ARTICLE
39:  MAXDEF%,   \              REM MAX KEYWORDS PER CONCEPT DEFINITION
40:  MAXCON%,   \              REM MAX NUMBER CONCEPTS PER QUERY
41:  MAXBIB%,   \              REM MAX NUMBER ARTICLES IN BIBLIO FILE
42:  AUTH.LEN%, \              REM AUTHOR NAME FIELD LENGTH
43:  TITL.LEN%, \              REM ARTICLE TITLE FIELD LENGTH
44:  JOUR.LEN%, \              REM JOURNAL NAME FIELD LENGTH
45:  ISS.LEN%,  \              REM ISSUE IDENTIFIER FIELD LENGTH
46:  KWD.LEN%                  REM KEYWORD FIELD LENGTH
47:  12 CLOSE 3
48:
49:                            REM TOTAL ARTICLE RECORD LENGTH
50:  RLEN%=AUTH.LEN% +JOUR.LEN% + ISS.LEN% + TITL.LEN% + \
51:          3*(MAXDESC%+1) + 2
52:  DIM KEYWD$(MAXKEYS%)
53:
54:  REM DISPLAY MENU AND GET SELECTION
55:    PRINT CLS$ : PRINT
56:    PRINT TAB(12); "----------BIBLIOGRAPHY SEARCH----------"
57:    PRINT
58:    PRINT TAB(12); "1    BUILD/MODIFY BIBLIOGRAPHY"
59:    PRINT TAB(12); "2    BUILD/MODIFY KEYWORD VOCABULARY"
60:    PRINT TAB(12); "3    LIST KEYWORD VOCABULARY WORDS"
61:    PRINT TAB(12); "4    SEARCH BIBLIOGRAPHY FILE"
62:    PRINT TAB(12); "5    COMPRESS BIBLIOGRAPHY FILE"
63:    PRINT TAB(12); "6    DONE--EXIT TO SYSTEM"
64:    OPT%=7 : PRINT : PRINT
65:    WHILE (OPT%>6) OR (OPT%<1)
66:    INPUT "PLEASE SELECT DESIRED FUNCTION BY NUMBER: ";OPT%
67:    IF (OPT%>6) OR (OPT%<1) THEN \
68:      PRINT "ILLEGAL FUNCTION NUMBER--REENTER"
69:      WEND
70:
71:  REM EXECUTE SELECTED FUNCTION
72:    IF OPT%=6 THEN STOP
73:    IF OPT%=1 THEN CHAIN "BIBBLD"
74:    IF OPT%=2 THEN CHAIN "VOCBLD"
75:    IF OPT%=3 THEN CHAIN "VOCLST"
76:    IF OPT%=4 THEN CHAIN "BIBSRCH"
77:    IF OPT%=5 THEN CHAIN "CMPRBIB"
78:  STOP
```

Listing 2: *PARMS, the system parameter definition program, is automatically called from BIBLIO when a new library is being established. PARMS interacts with the user to build a file containing the system file descriptions and other parameters.*

```
1:   REM ----------FILE PARMS.BAS
2:
3:   REM PROGRAM PARAMETER DEFINITION MODULE
```

Listing 2 continued on page 392

www.americanradiohistory.com

Listing 2 continued:

```
4:   COMMON KEYWD$(1),LIBNAME$,RLENZ,TRUEZ,AUTH.LENZ,TITL.LENZ
5:   COMMON MAXBIBZ,MAXDESCZ,MAXDEFZ,MAXKEYSZ,MAXCONZ,CONCEPT$(1)
6:   COMMON ISS.LENZ,CLS$,LRRZ,JOUR.LENZ,KWD.LENZ,CMD$(1)
7:   COMMON LFTZ(1),RGHTZ(1),CON.KEYZ(2),CON.RATE(2),QUERY$,LZ
8:   DIM SPARMZ(4)
9:
10:  SPACEZ=FRE
11:  SPACEZ=SPACEZ-1000
12:  10 PRINT CLS$
13:  PRINT TAB(12);"----PARAMETER DEFINITION FOR ";
14:  PRINT LIBNAME$;"----"
15:  PRINT
16:  PRINT \
17:    "THIS MODULE WILL DEFINE THE PARAMETERS FOR THE LIBRARY "; LIBNAME$
18:  INPUT "IF YOU DO NOT WISH TO PROCEED ENTER S ELSE ENTER C: ";ANS$
19:  IF UCASE$(LEFT$(ANS$,1))<>"C" THEN STOP
20:  PRINT \
21:  "** FIRST WE DEFINE THE ARTICLE RECORD FIELD SIZES **"
22:  12 PRINT \
23:  "YOU HAVE A MAXIMUM OF 250 CHARACTERS THAT MAY BE ALLOCATED"
24:  PRINT \
25:  "FOR EACH ARTICLE RECORD. EACH KEYWORD DESCRIPTOR ATTACHED"
26:  PRINT \
27:  "WILL CONSUME THREE OF THESE."
28:  INPUT \
29:  "WHAT IS THE MAXIMUM NUMBER OF DESCRIPTORS PER ARTICLE? ";MAXDESCZ
30:  PRINT USING \
31:  "YOU HAVE ### CHARACTERS REMAINING."; 250-3*MAXDESCZ
32:  13 PRINT \
33:  "ENTER MAXIMUM FIELD LENGTHS, IN ORDER, FOR AUTHOR, TITLE,"
34:  PRINT \
35:  "JOURNAL, AND ISSUE---ALL ON ONE LINE.  SEPARATE ENTRIES BY"
36:  PRINT \
37:  "ONE OR MORE SPACES AND FOLLOW LAST ENTRY WITH RETURN."
38:  GOSUB 100
39:  IF VZ<>5 THEN \
40:    PRINT "INCORRECT NUMBER OF ENTRIES--RE-ENTER" :\
41:    GOTO 13
42:  AUTH.LENZ=SPARMZ(1) : TITL.LENZ=SPARMZ(2)
43:  JOUR.LENZ=SPARMZ(3) : ISS.LENZ =SPARMZ(4)
44:  RLENZ=AUTH.LENZ+TITL.LENZ+JOUR.LENZ+ISS.LENZ
45:  RLENZ=RLENZ+3*(MAXDESCZ+1)+2
46:  IF RLENZ>255 THEN \
47:    PRINT USING "RECORD CONTAINS ##### CHARACTERS"; RLENZ-5 :\
48:    PRINT "THE MAXIMUM IS 250 --PLEASE RE-DEFINE FIELDS" :\
49:    GOTO 12
50:
51:  PRINT CLS$
52:  PRINT \
53:  "** NOW WE SET THE MAXIMUM SIZES OF OTHER PARAMETERS **"
54:  40 PRINT \
55:  "ENTER, IN ORDER, THE MAX TO BE ALLOWED FOR :"
56:  PRINT \
57:  "CHARS PER KEYWORD, NO. OF KEYWORDS IN VOCABULARY (<256)"
58:  PRINT \
59:  "NO. CONCEPTS PER INTERROGATION, NO. KEYWORDS PER CONCEPT."
60:  PRINT \
61:  "SEPARATE ENTRIES BY SPACES AND FOLLOW LAST WITH RETURN."
62:  GOSUB 100
63:  IF VZ<>5 THEN \
64:    PRINT "INCORRECT NUMBER OF ENTRIES -- RE-ENTER" :\
65:    GOTO 40
66:  KWD.LENZ= SPARMZ(1) : MAXKEYSZ=SPARMZ(2)
67:  MAXCONZ = SPARMZ(3) : MAXDEFZ =SPARMZ(4)
68:  IF MAXKEYSZ>255 THEN MAXKEYSZ=255
69:  INPUT "CAPACITY OF ONE SIDE OF ONE DISK (KILOBYTES): ";D.CAP
70:  KY.FILZ=2*MAXKEYSZ*(KWD.LENZ+2)
71:  KY.FILZ=1024*(INTZ(KY.FILZ/1024)+1)
72:  D.CAP=(1000*D.CAP-1024-KY.FILZ)/RLENZ
73:  D.CAP=D.CAP-1
74:  RLZ=8*(MAXCONZ+1)*(MAXDEFZ+2)
75:  INZ=2*(MAXCONZ+1)*(MAXDEFZ+1) + 4*(MAXCONZ+1)
76:  STZ=(MAXKEYSZ+1)*KWD.LENZ
77:  MEMZ=(SPACEZ-RLZ-INZ-STZ)/2
78:  PRINT USING \
79:  "YOU HAVE DISK SPACE FOR ###### ARTICLES. "; D.CAP
80:  PRINT USING \
81:  "YOU HAVE MEMORY SPACE FOR ###### ARTICLES. "; MEMZ
82:  IF MEMZ<D.CAP THEN MSPACE=MEMZ ELSE MSPACE=D.CAP
83:  PRINT USING \
84:  "###### ARTICLES IS THE MAXIMUM YOU MAY HAVE. "; MSPACE
85:  INPUT \
86:  "DO YOU WISH TO RE-ALLOCATE THE AVAILABLE SPACE (Y/N)? ";ANS$
87:  IF UCASE$(LEFT$(ANS$,1))="Y" THEN 10
88:  INPUT "MAXIMUM NO. OF ARTICLES DESIRED: ";MAXBIBZ
89:  IF MAXBIBZ>MSPACE THEN MAXBIBZ=MSPACE
90:
91:  CREATE LIBNAME$+".DEF" AS 1
92:  PRINT #1; \
93:    MAXKEYSZ,MAXDESCZ,MAXDEFZ,MAXCONZ, \
94:    MAXBIBZ,AUTH.LENZ,TITL.LENZ,JOUR.LENZ, \
95:    ISS.LENZ, KWD.LENZ
96:  CLOSE 1
97:  CHAIN "BIBLIO"
98:  100 INPUT "> "; DUM$ : IZ=1 : VZ=0
99:  WHILE (IZ<LEN(DUM$)) AND (VZ<5)
100:   WHILE MID$(DUM$,IZ,1)=" " : IZ=IZ+1 : WEND
```

Listing 2 continued on page 393

one keyword; record length is the system parameter of line 46, listing 1. The maximum length of this file is defined in line 37 of listing 1 and cannot exceed 255 keywords.

The bibliography file, <library> .BIB, contains fixed-length records with five fields each. The first four fields contain the author's name, the article title, the journal name, and the journal issue. The system parameters in lines 42–45 of listing 1 specify the maximum number of characters that each of these fields can contain. The last of the five fields in an article record contains the keyword descriptor data, three characters per descriptor. The first two characters of each descriptor are the ASCII (American Standard Code for Information Interchange) representation of the hexadecimally encoded keyword index number; the third is the ASCII hexadecimally encoded value of the article applicability rating for the keyword, scaled up by a factor of 10.

The maximum record length for an article is 255 keywords; of these, two are required as record delimiters by CBASIC and three are used to flag the end of the keyword descriptor list. Thus the author, title, journal, and issue field lengths added to three times the number of keyword descriptors must not exceed 250. The maximum number of keyword descriptors that may be attached to an article is defined by the parameter in line 38 of listing 1.

Building a Library

Let's walk through each of the program functions in the order you would follow to build a new library. By way of example, I will often refer to the representations of the video displays shown in listings 9–14. All user inputs in these display listings have been underlined for easy identification.

First, we call up the program for our library named COMPJOUR with the CP/M command CRUN2 BIBLIO COMPJOUR. If we had not included the library name, the BIBLIO program would have asked for one. The library name may be preceded by a disk-drive specifier; if none is specified, the system will assume the files are assigned to the drive that was selected prior to

www.americanradiohistory.com

the run command. Because we are building a new library, BIBLIO will not find any files called COMPJOUR and will immediately branch to the system parameter-definition program PARMS. Listing 9 represents the video screen as we define the contents of the system parameter file COMPJOUR.DEF by responding to requests from PARMS. PARMS first gives us a chance to exit back to the operating system in case we have mistyped the library name. If the name is correct and we want to proceed, we enter a C and PARMS begins the first phase of the definition process. This phase sets up the field lengths for the article records and is completed as shown in listing 9.

The second phase, shown in the screen copy in listing 10, completes the definition process by defining parameters for the keyword vocabulary file and setting the sizes of arrays. We are asked to state the capacity of one disk surface so that the program can calculate an upper limit for the number of articles that can be stored. The number of K bytes entered should be the data storage capacity *minus* the combined size of all programs that must reside on the same disk. Because the bibliographic programs occupy 17K bytes and the CBASIC run-time interpreter requires 17K bytes of disk space, we will enter a figure of 206K bytes, which is the maximum capacity left for data storage if we have one single-sided single-density 8-inch disk. After PARMS is given this number, it informs us of the maximum number of articles that can be accommodated in the available disk and memory space. The amount of memory stated in listing 10 (13,823) is for a 64K-byte system. A 48K-byte system would provide sufficient space for processing about 5600 articles.

Before PARMS writes the COMPJOUR.DEF file, it gives us a chance to change the definitions. We might want, for example, to increase the number of articles that the disk can accommodate at the expense of the article-record size. Once the parameters file, the keyword vocabulary file, and the article file have been built, we can still redefine some of

Listing 2 continued:

```
101:    SPARM%(VZ)=VAL(RIGHT$(DUM$,LEN(DUM$)-I%-1))
102:    VZ=VZ+1
103:    WHILE (MID$(DUM$,I%,1)<>" ") AND (I% <LEN(DUM$))
104:      I%=I%+1 : WEND
105:    WEND
106: RETURN
```

Listing 3: *VOCBLD, selected by menu item 2 from BIBLIO, lets the user build or modify the file containing the vocabulary of keywords.*

```
1:    REM            FILE VOCBLD.BAS
2:
3:    REM BUILD/ENLARGE/CHANGE KEYWORD VOCABULARY
4:
5:    COMMON KEYWD$(),LIBNAME$,KEY%,TRUE%,AUTH.LEN%,TITL.LEN%
6:    COMMON MAXBIT%,MAXDISC%,MAXDEF%,MAXKEYS%,MAXCON%,CONDEF$()
7:    COMMON YRS.LEN%,CLS$,ERR%,JOUR.LEN%,KWD.LEN%,CMD$()
8:    COMMON LFT%(),RGHT%(),CON.KEY%(2),CON.RATE(2),QUERY$,I%
9:    DIM DKEY%(MAXKEYS%),VZ(MAXKEYS%),MOVE%(MAXKEYS%)
10:   DIM L.STK%(8),R.STK%(8)
11:   ON ERROR GOTO 4E1 REM BUILD/ENLARGE/CHANGE VOCABULARY FILE
12:   PRINT CLS$
13:   PRINT TAB(12);"--------KEYWORD VOCABULARY BUILD/MODIFY--------"
14:   PRINT
15:   BLANK$="                                                                "
16:   ZEES$="ZZZ
```

Listing 3 continued:

```
78:  SZ=1 : L.STKZ(1)=1 : R.STKZ(1)=VOC.LENZ
79:  4.41E1 LZ=L.STKZ(SZ) : RZ=R.STKZ(SZ) : SZ=SZ-1
80:    4.422E1 IZ=LZ : JZ=RZ : X$=KEYWD$(INTZ((LZ+RZ)/2))
81:      4.43E1 WHILE KEYWD$(IZ)<X$ : IZ=IZ+1 : WEND
82:      WHILE X$<KEYWD$(JZ) : JZ=JZ-1 : WEND
83:      IF IZ<=JZ THEN \
84:        W$=KEYWD$(IZ) : KEYWD$(IZ)=KEYWD$(JZ) :\
85:        KEYWD$(JZ)=W$ : TEMPZ=VZ(IZ) :\
86:        VZ(IZ)=VZ(JZ) : VZ(JZ)=TEMPZ :\
87:        IZ=IZ+1 : JZ=JZ-1
88:      IF IZ<=JZ THEN 4.43E1
89:    IF (JZ-LZ) >= (RZ-IZ) THEN 4.44E1
90:    IF IZ<RZ THEN \
91:      SZ=SZ+1 : L.STKZ(SZ)=IZ : R.STKZ(SZ)=RZ
92:    RZ=JZ
93:    GOTO 4.45E1
94:    4.44E1 IF LZ<JZ THEN \
95:      SZ=SZ+1 : L.STKZ(SZ)=LZ : R.STKZ(SZ)=JZ
96:    LZ=IZ
97:    4.45E1 IF LZ<RZ THEN 4.422E1
98:  IF SZ<>0 THEN 4.41E1
99:
100: REM RE-SHUFFLE MOVE VECTOR
101: IF NEWZ THEN 4.42E1
102:   FOR IZ=1 TO VOC.LENZ
103:     IF VZ(IZ)<=OLD.NUMZ THEN \
104:       MOVEZ(VZ(IZ))=IZ-VZ(IZ)
105:     NEXT IZ
106:
107: IF DELZ<=0 THEN 4.42E1
108: FOR IZ=1 TO DELZ
109:   MOVEZ(DKEYZ(IZ))=999
110:   NEXT IZ
111: VOC.LENZ=VOC.LENZ-DELZ
112:
113: 4.42E1 REM WRITE KEYWD$  ARRAY TO DISK
114: IF END #1 THEN 4.6E1
115: FOR IZ=1 TO VOC.LENZ
116:   PRINT USING "&"; #1; KEYWD$(IZ)
117:   NEXT IZ
118: CLOSE 1
119: PRINT VOC.LENZ; " KEYWORDS WRITTEN TO VOCABULARY"
120:
121: IF NOT NEWZ THEN \
122:   E%=RENAME (LIBNAME$+".VOC",LIBNAME$+".VTM") :\
123:   OPEN LIBNAME$+".VEK" AS 1 :\
124:   DELETE 1 :\
125:   GOSUB 5E1
126: CHAIN "VOCLST"
127:
128: 4.6E1 PRINT "FILE WRITE ERROR"
129: IF NEWZ THEN DELETE 1 ELSE CLOSE 1 :\
130:   E%=RENAME (LIBNAME$+".VOC", LIBNAME$+".VEK") :\
131:   OPEN LIBNAME$+".VTM" AS 1 :\
132:   DELETE 1
133: INPUT "PRESS RETURN TO GO BACK TO MENU "; LINE ANS$
134: 4.9E1 CHAIN "BIBLIO"
135:
136: REM CONVERT TWO ASCII HEX TO INTEGER
137: DEF FN.TWO.INTZ(DUM$)
138: TENZ=ASC(MID$(DUM$,1,1))
139: IF TENZ>64 THEN TENZ=TENZ-55 ELSE TENZ=TENZ-48
140: ONEZ=ASC(MID$(DUM$,2,1))
141: IF ONEZ>64 THEN ONEZ=ONEZ-55 ELSE ONEZ=ONEZ-48
142: FN.TWO.INTZ=16*TENZ + ONEZ
143: RETURN
144: FEND
145:
146: REM CONVERT INTEGER TO TWO ASCII HEX
147: DEF FN.INT.TWO$(DUMZ)
148: HIZ=DUMZ/16 : LOZ=DUMZ-16*HIZ
149: IF HIZ<10 THEN HIZ=HIZ+48 ELSE HIZ=HIZ+55
150: IF LOZ<10 THEN LOZ=LOZ+48 ELSE LOZ=LOZ+55
151: FN.INT.TWO$=CHR$(HIZ) + CHR$(LOZ)
152: RETURN
153: FEND
154:
155: 5E1 REM ALTER KEYWORD NUMBERS IN BIBLIO FILE FOR NEW ORDERING
156:
157: REM IF THERE IS NO BIBLIO FILE WE ARE DONE
158: IF END #2 THEN 5.5E1
159: OPEN LIBNAME$+".BIB" RECL RLENZ AS 2
160: IF SIZE(LIBNAME$+".BIB")=0 THEN \
161:   DELETE 2 : RETURN
162:
163: REM OTHERWISE WE READ AND MODIFY
164: PRINT "MODIFYING KEYWORD DESCRIPTORS IN BIBLIO...."
165: IF END #2 THEN 5.4E1
166: RNUMZ=2
167: READ #2,1; LINE TEMP$
168: DESC.BEGZ=AUTH.LENZ+TITL.LENZ+JOUR.LENZ+ISS.LENZ+1
169: WHILE TRUEZ
170:   READ #2,RNUMZ; LINE TEMP$
171:   IZ=DESC.BEGZ : LIZ=LEN(TEMP$)
172:   WHILE TRUEZ
173:     DUM$=MID$(TEMP$,IZ,3)
174:     IF DUM$="FFF" THEN 5.3E1
```

Listing 3 continued on page 395

these parameters. This might be desirable if changes have occurred in either our disk or memory capacity. None of the parameters entered in listing 9 can be altered, nor can the first parameter entered in listing 10, but any or all of the rest may be. The safest way to accomplish a redefinition is to rename the existing COMPJOUR.DEF file to save it as a backup and then rerun BIBLIO, which will let us generate a new COMPJOUR.DEF file as described above. We can then display the contents of both files on the video screen by using the CP/M command TYPE in order to verify that the new file is correct. When the parameter definition is completed, the program displays the menu shown in listing 11 and asks us to make a selection. This menu reappears after completion of any of the six listed tasks—except the last, which exits to CP/M. Our next step is to build a vocabulary of keywords. Accordingly, we select menu item 2 and branch to the program VOCBLD.

Listing 12 represents the video display as we use VOCBLD to add to an existing library of 110 words. The display is the same for building a new vocabulary except that the query about adding or deleting is not present and the keyword numbers start with 1. Keyword entries may not contain spaces. To enter a multiple-word keyword, we hyphenate it as shown in the first keyword entry in listing 12. We terminate the entry of keywords by pressing only the Return key in response to the keyword entry prompt.

Once all the keywords have been entered, VOCBLD sorts them into alphabetic order and then notifies us of the total number contained in the file COMPJOUR.VOC after it has written or rewritten the file. If a file of articles, COMPJOUR.BIB, has already been created, VOCBLD will next scan it and modify the keyword numbers attached to each article to reflect the reordered vocabulary of keywords. VOCBLD informs us that it is doing this in the last line of listing 12. As its last step, VOCBLD calls up the vocabulary listing program VOCLST to give us an up-to-date

www.americanradiohistory.com

printout of the vocabulary such as that shown in listing 13. We can execute VOCLST at any time by selecting menu item 3 and directing output to the printer or the video display. After the vocabulary is listed, the display reverts to the main menu.

To continue creating a new library, we select menu item 1, which causes BIBLD to execute. As shown in listing 14, BIBLD prompts us to enter each item in an article record and to terminate data entry by responding to the AUTHOR prompt by pressing the Return key. The display in listing 14 actually shows an addition to a file of articles that already existed; the only difference in the display is the question in the second line. When we enter the keywords and their ratings, we must separate them by spaces; we must also enter the keywords exactly as they appear in the vocabulary. When we finish entering articles, BIBLD updates the COMPJOUR.BIB file, informs us of the number of articles on file, and then transfers back to the menu display when we press Return.

Searching the Library

Now that we have built a library, we can search it. Selecting menu item 4 calls BIBSRCH, which puts us in the search mode and, as shown in listing 15, prompts us to enter the interrogation phrase. The phrase we have chosen, entered in the third line of the display, expresses interest in articles about graphics that use a plotter; in addition, the phrase states (through the # sign for implication) that if the article describes a program, the program should be in BASIC. Next, BIBSRCH asks us to define each of the words, or concepts, used in our interrogation; recall that these concepts need not be keywords. The definitions entered tell BIBSRCH to interpret the concept GRAPHICS to mean exactly what the keyword GRAPHICS means; to interpret PLOTTER as meaning either of the keywords PLOTTER or PRINTER but that we prefer PLOTTER; to interpret PROGRAM to mean either of the keywords PROGRAM or LISTING; and, finally, to interpret BASIC to mean the same as the keyword BASIC.

Listing 3 continued:

```
175!     KZ=FN.TWO.INI%(DUM$)
176!     IF MOVE(KZ)=999 THEN \
177!       DUM2$="" \
178!     ELSE \
179!       KZ=KZ+MOVE(KZ) :\
180!       DUM2$=FN.INI.WDS$(KZ) + RIGHT$(DUM$,I)
181!   TEMP1$=LEFT$(TEMP$,IZ-1)+DUM2$+RIGHT$(TEMP$,LIZ-IZ-2)
182!   TEMP$=LEFT$(TEMP1$+"    ",L1Z)
183!   IF LEN(DUM2$)>0 THEN IZ=IZ+3
184!   WEND
185!  S.3E1 PRINT USING "#"; #2,KWUM2! TEMP$
186!  KWUM2=KWUM2+1
187!  WEND
188! S.4E1 CLOSE 2
189! S.5E1 RETURN
```

Listing 4: *VOCLST, called automatically from VOCBLD after any modifications to the keyword vocabulary, lists the vocabulary on the screen or printer. VOCLST can also be executed by selecting menu item 3 in BIBLIO.*

```
1!    REM -------FILE VOCLST.BAS
2!
3!    REM VOCABULARY LIST TO CONSOLE/PRINTER
4!    COMMON KEYWD$(),LIBNAME$,RLEN%,TRUE%,AUTH.LEN%,TIT.LEN%
5!    COMMON MAXBIB%,MAXDEC%,MAXDEF%,MAXKEY%,MAXQUN%,COMLEP$()
6!    COMMON IBB.LEN%,CLR$,ERR%,JOUR.LEN%,KWD.LEN%,CMD$()
7!    COMMON LFI%(),KBHI%(),COM.KEY%(2),COM.RATE(2),DUER%,LZ
8!
9!    PRINT CLR$ ! PRINT
10!   PRINT TAB(12)!"----------KEYWORD VOCAFULARY LISTER----------"
11!   PRINT
12!   INPUT "DO YOU WISH A PRINTED LISTING (Y/N)? "!ANR$
13!   IF UCASE$(LEFT$(ANR$,1))="Y" THEN \
14!     LPRINTER : COLZ=0 \
15!     ELSE PRINT CLR$ : COLZ=3
16!
17!   REM IF NO VOCABULARY FILE RETURN TO MENU
18!   IF END #1 THEN 3.3E1
19!   OPEN LIBNAME$+".VOC" AS 1
20!   IF SIZE(LIBNAME$+".VOC")=0 THEN \
21!     DELETE 1 : GOTO 3.3F1
22!
23!   REM OTHERWISE READ COMPLETE VOCABULARY
24!   IF END #1 THEN 3.1E1
25!   IZ=1
26!   WHILE TRUE%
27!     READ #1!LINE KEYWD$(IZ)
28!     IZ=IZ+1
29!   WEND
30!  3.1E1 IZ=IZ-1
31!  CLOSE 1
32!
33!  REM LIST IN FOUR COLUMNS FOR PRINTER. THREE FOR SCREEN
34!  IF COLZ=0 THEN LPRINTER :\
35!    FOR JZ=1 TO 5 ! PRINT ! NEXT JZ :\
36!    PRINT TAB(23)!LIBNAME$;" KEYWORD VOCABULARY" :\
37!    PRINT TAB(23)!"----------" :\
38!  M.KOWZ=INT(IZ/COLZ)
39!  IF IZ>(M.KOWZ*COLZ) THEN M.KOWZ=M.KOWZ+1
40!  FOR JZ=1 TO M.KOWZ
41!    FOR KZ=0 TO COLZ-1
42!      IWDZ=JZ+KZ*M.KOWZ
43!      IF IWDZ>IZ THEN 3.2E1
44!      PRINT USING "###";IWDZ;
45!      PRINT " ";KEYWD$(IWDZ);
46!    NEXT KZ
47!   3.2E1 PRINT
48!   NEXT JZ
49!  PRINT
50!  IF COLZ=0 THEN PRINT ! PRINT: PRINT ! PRINT
51!  CONSOLE
52!  PRINT
53!
54!  3.4E1 INPUT "PRESS RETURN TO GO BACK TO MENU"! LINE ANR$
55!  CHAIN "BIBLIO"
56!
57!   3.3E1 PRINT "NO VOCABULARY FILE NAMED "; LIBNAME$
58!   GOTO 3.4E1
```

Listing 5: *BIBLD, called by menu selection 1 in BIBLIO, is used to build or modify the bibliographic file of articles.*

```
1!    REM -------FILE BIBBLD.BAS
2!
3!    REM  BIBLIO BUILD/MODIFY ROUTINE
```

Listing 5 continued on page 396

www.americanradiohistory.com

Listing 5 continued:

```
4:   COMMON KEYWD$(1),LIBNAME$,RLENZ,TRUEZ,AUTH.LENZ,TITL.LENZ
5:   COMMON MAXBIBZ,MAXDESCZ,MAXDEFZ,MAXKEYSZ,MAXCONZ,CONCEPT$(1)
6:   COMMON ISS.LENZ,CLS$,ERRZ,JOUR.LENZ,KWD.LENZ,CMD$(1)
7:   COMMON LFTZ(1),RGHTZ(1),CON.KEYZ(2),CON.RATE(2),QUERY$,LZ
8:   GOSUB 6E1
9:   CHAIN "BIBLIO"
10:  STOP
11:
12:  REM CONVERT INTEGER TO TWO ASCII HEX
13:  DEF FN.INT.TWO$(DUMZ)
14:  HIZ=DUMZ/16 : LOZ=DUMZ-16*HIZ
15:  IF HIZ<10 THEN HIZ=HIZ+48 ELSE HIZ=HIZ+55
16:  IF LOZ<10 THEN LOZ=LOZ+48 ELSE LOZ=LOZ+55
17:  FN.INT.TWO$=CHR$(HIZ) + CHR$(LOZ)
18:  RETURN
19:  FEND
20:
21:  REM CONVERT ONE DIGIT REAL TO ASCII HEX
22:  DEF FN.REALONE$(DUM)
23:  ONEZ=INTZ(10.0*DUM)
24:  IF ONEZ<10 THEN ONEZ=ONEZ+48 ELSE ONEZ=ONEZ+55
25:  FN.REALONE$=CHR$(ONEZ)
26:  RETURN
27:  FEND
28:
29:  6E1 REM BUILD/MODIFY BIBLIOGRAPHY FILE
30:  PRINT CLS$
31:  PRINT TAB(12); "----------BIBLIO BUILD/MODIFY----------"
32:  PRINT
33:
34:  REM IF NO VOCABULARY FILE,EXIT TO MENU
35:  IF END #1 THEN 6.1E1
36:  OPEN LIBNAME$+".VOC" AS 1
37:  IF SIZE(LIBNAME$+".VOC")=0 THEN \
38:    DELETE 1 : GOTO 6.1E1
39:  VOC.LENZ=1
40:
41:  REM OTHERWISE READ VOCABULARY
42:  IF END #1 THEN 6.2E1
43:  WHILE TRUEZ
44:    READ #1;KEYWD$(VOC.LENZ)
45:    VOC.LENZ=VOC.LENZ+1
46:    WEND
47:  6.2E1 CLOSE 1
48:  VOC.LENZ=VOC.LENZ-1
49:
50:  REM IF NO BIBLIO FILE, GO BUILD ONE
51:  IF END #2 THEN 6.3E1
52:  OPEN LIBNAME$+".BIB" RECL RLENZ AS 2
53:  IF SIZE(LIBNAME$+".BIB")=0 THEN \
54:    DELETE 2 : GOTO 6.3E1
55:
56:  REM OTHERWISE WE WANT TO ADD OR DELETE
57:  INPUT "DO YOU WISH TO ADD OR DELETE ARTICLES (A/D)? ";ANS$
58:  ANS$=UCASE$(LEFT$(ANS$,1))
59:  IF ANS$="D" THEN 4E1
60:
61:  REM FIND LAST SECTOR AND READ BIBLIO TO EOF
62:  IF END #2 THEN 6.37E1
63:  READ #2,1; LINE BUFF$
64:  BIB.LENZ=VAL(BUFF$)
65:  READ #2,BIB.LENZ-2;
66:  WHILE TRUEZ
67:    READ #2;BUFF$
68:    WEND
69:  GOTO 6.37E1
70:
71:  6.3E1 REM BUILD IT
72:  BIB.LENZ=0
73:  CREATE LIBNAME$+".BIB" RECL RLENZ AS 2
74:  PRINT USING "######"; #2,1; BIB.LENZ
75:
76:  REM GET ENTRIES FOR BIBLIO AND WRITE TO FILE
77:  6.37E1 BLANK$="                                                    "
78:  PRINT "PRESSING RETURN IN RESPONSE TO THE PROMPT 'AUTHOR'"
79:  PRINT "TERMINATES THIS ROUTINE. "
80:  PRINT
81:  WHILE TRUEZ
82:    IF BIB.LENZ>=MAXBIBZ THEN 6.34E1
83:    BUFF$=""
84:    INPUT "AUTHOR :  "; LINE AUTHOR$
85:    IF LEN(AUTHOR$)=0 THEN \
86:      PRINT USING "&"; #2; CHR$(26) ;\
87:      GOTO 6.32E1
88:    INPUT "TITLE :   "; LINE TITLE$
89:    INPUT "JOURNAL : "; LINE JOURNAL$
90:    INPUT "ISSUE :   "; LINE ISSUE$
91:    AUTHOR$=LEFT$(AUTHOR$+BLANK$,AUTH.LENZ)
92:    TITLE$=LEFT$(TITLE$+BLANK$,TITL.LENZ)
93:    JOURNAL$=LEFT$(JOURNAL$+BLANK$,JOUR.LENZ)
94:    ISSUE$=LEFT$(ISSUE$+BLANK$,ISS.LENZ)
95:    6.33E1 BUFF$=AUTHOR$+TITLE$+JOURNAL$+ISSUE$
96:    PRINT "ENTER KEYWORDS AND RATINGS, I.E., KEYWORD1 0.5 KEYWORD2 0.6"
97:
98:  REM GET KEYWORDS AND RATINGS--CODE INTO ASCII HEX
99:    CMD$="" : KEYZ=0 : ERRZ=0
100:   INPUT ">"; LINE CMD$
```

Listing 5 continued on page 397

Before we continue, a few notes on the syntax of an interrogation phrase seem appropriate. Parentheses establish the precedence of the operations; the complete phrase must be enclosed in parentheses and it may not contain spaces. The fuzzy-operator notation is defined in table 1; the NOT operator must be immediately preceded by a right parenthesis, marking the end of the expression to which the NOT applies.

After BIBSRCH has parsed the interrogation phrase and defined the concepts according to our instructions, the program chains to BIBSR2, the second half of the search program. BIBSR2 scans each article on file, calculating the degree to which each one satisfies our interrogation. The amount of time required for this search can be substantial for a large bibliography, but as long as we see that the disk is being accessed properly, we can be sure the search is proceeding normally. When this scan is over, the video display represented in listing 16 appears with a summary of the results of the search. We can then enter the rating level that we want articles to meet or exceed. Next we indicate whether we want printed output for the search report. When the program has this choice, it prints or displays the report as shown in listing 17. The report begins with a section recounting the specifications for the search, which is followed by articles that meet those specifications.

Some Notes and Cautions

Three of the system's capabilities remain to be addressed. We can delete keywords from the vocabulary under menu item 2. The display is essentially the same as that for adding keywords (see listing 12), except that we are asked to enter the index number for the keyword rather than the keyword itself. Menu item 1 lets us delete articles from the bibliography. This is a slow process because each article in the file is read and displayed, and we are asked to choose to keep or delete each article. Those we designate for deletion are flagged and then rewritten; those we designate for retention are rewritten unchanged.

www.americanradiohistory.com

After enough records have been flagged for deletion to make it worthwhile to recover their space, menu item 6 can compress the file. We can use an alternate method of deleting articles if enough disk space is available. The file of articles can be read by ED, the CP/M editor; because each article will appear to the editor as one line, the line positioning and kill commands can be used to delete articles. If we use this method, the total record count contained in the first record of the file must be changed to reflect the new total.

You will need to change line 21 of the program BIBLIO to set the clear-screen command to that required by your terminal. The display and printer formatting in these programs assumes a line length of at least 64 characters for the display and 80 for the printer. If your lines are shorter, you may wish to change the output formatting.

Possible Extensions

The programs I have described can be run on systems with at least 40K bytes of memory and one disk drive. As the examples illustrate, the use of fuzzy sets provides information on the degree to which articles meet certain requirements. A traditional keyword search would not provide this information.

Many businesses could take advantage of the application of fuzzy sets to the search process. The system could match customer preferences with product or service descriptions and rate each service or product for customer satisfaction. Real-estate and mail-order firms come readily to mind. You may devise other applications to extend and improve the capabilities of the bibliographic search system. ■

References

1. Yager, R. "A Logical On-Line Bibliographic Searcher: An Application of Fuzzy Sets." *IEEE Transactions on Systems, Man, and Cybernetics*, vol. SMC-10, no. 1, January 1980, p. 51.
2. Watson, S. "Fuzzy Decision Analysis." *IEEE Transactions on Systems, Man, and Cybernetics*, vol. SMC-9, no. 1, January 1979, p. 1.

Listing 5 continued:

```
101:   IF (LEN(CMD$)=0)  THEN 6.31E1
102:   SW%=-1 : I%=1 : W.NUM%=0
103:   WHILE (I%<LEN(CMD$))
104:     IF KEY%>=MAXDESC% THEN 6.39E1
105:     WHILE (MID$(CMD$,I%,1)=" ")
106:       I%=I%+1
107:     WEND
108:     DUM$=RIGHT$(CMD$,LEN(CMD$)-I%+1)
109:     IF NOT SW% THEN 6.36E1
110:       W.NUM%=W.NUM%+1
111:       GOSUB 19E1
112:       IF ERR% THEN 6.33E1
113:       BUFF$=BUFF$+FN.INT.TWO$(KB%)
114:       SW%=0
115:       GOTO 6.38E1
116:     6.36E1 CH$=LEFT$(DUM$,1)
117:       IF (CH$<>".") AND ((CH$<"0") OR (CH$>"9")) THEN \
118:         PRINT "KEYWORDS MAY NOT CONTAIN BLANKS---RE-ENTER LINE" :\
119:         GOTO 6.33E1
120:       IF LEFT$(DUM$,1)="." THEN \
121:         RAT=VAL("0"+DUM$) \
122:       ELSE RAT=VAL(DUM$)
123:       BUFF$=BUFF$+FN.REALONE$(RAT)
124:       KEY%=KEY%+1
125:       SW%=-1
126:     6.38E1 WHILE (MID$(CMD$,I%,1) >" ") AND (I%<LEN(CMD$))
127:       I%=I%+1
128:     WEND
129:   WEND
130:   6.31E1 BUFF$=BUFF$+"FFF"
131:   PRINT USING "&"; #2; BUFF$
132:   BIB.LEN%=BIB.LEN%+1
133:   WEND
134:
135: 4E1 REM READ AND DISPLAY ARTICLES, SAVING OR DELETING AS WE GO
136: R.REC%=2 : DEL%=0
137: READ #2,1; LINE BUFF$
138: PRINT "TO DELETE RESPOND TO THE PROMPT ' > ' WITH AT LEAST TWO"
139: PRINT "DEPRESSIONS OF LB SIGN $, THEN RETURN.  DEPRESS ONLY THE"
140: PRINT "RETURN TO SAVE, ENTER E THEN RETURN TO EXIT TO MENU"
141: PRINT
142: IF END #2 THEN 4.4E1
143: WHILE TRUE%
144:   READ #2,R.REC%; LINE BUFF$
145:   PRINT MID$(BUFF$,AUTH.LEN%+TITL.LEN%+1,JOUR.LEN%);
146:   PRINT TAB(JOUR.LEN%+2); MID$(BUFF$,AUTH.LEN%+1,TITL.LEN%)
147:   PRINT MID$(BUFF$,AUTH.LEN%+TITL.LEN%+JOUR.LEN%+1,ISS.LEN%);
148:   PRINT TAB(JOUR.LEN%+2); LEFT$(BUFF$,AUTH.LEN%)
149:   PRINT
150:   INPUT "> "; LINE ANS$
151:   IF UCASE$(LEFT$(ANS$,1))="E" THEN 4.4E1
152:   IF LEFT$(ANS$,2)="$$" THEN \
153:     PRINT USING "&"; #2,R.REC%;"ZZZZZ"+RIGHT$(BUFF$,RLEN%-7) :\
154:     DEL%=DEL%+1
155:   R.REC%=R.REC%+1
156:   WEND
157: 4.4E1 PRINT DEL%; " ARTICLES MARKED DELETED"
158: CLOSE 2
159: GOTO 6.7E1
160:
161: 6.34E1 PRINT "FILE FULL--NO MORE ARTICLES CAN BE WRITTEN"
162: 6.32E1 PRINT BIB.LEN%; " ARTICLES ON FILE"
163: PRINT USING "######"; #2,1; BIB.LEN%
164: CLOSE 2
165: GOTO 6.7E1
166:
167: 6.1E1 PRINT "NO VOCABULARY FILE NAMED "; LIBNAME$
168: 6.7E1 INPUT "PRESS RETURN TO GO BACK TO MENU "; LINE ANS$
169: RETURN
170:
171: 6.39E1 REM TOO MANY KEYWORDS ENTERED
172: KEY%=0
173: BUFF$=LEFT$(BUFF$,AUTH.LEN%+TITL.LEN%+JOUR.LEN%+ISS.LEN%)
174: PRINT "NO MORE THAN ";MAXDESC%; " KEYWORDS PER ARTICLE CAN"
175: PRINT "BE ENTERED.  PLEASE SHORTEN LIST AND RE-ENTER"
176: GOTO 6.33E1
177:
178: 19E1 REM BREAKOUT KEYWORD AND FIND ITS NUMBER
179: IR%=1
180: WHILE MID$(DUM$,IR%,1) <>" " : IR%=IR%+1 : WEND
181: WORD$=LEFT$(DUM$,IR%-1)+BLANK$
182: WORD$=LEFT$(WORD$,16)
183: WORD$=UCASE$(WORD$)
184: REM BINARY SEARCH FOR WORD IN KEYWORD ARRAY
185: IB%=1 : JB%=VOC.LEN%
186: 19.1E1 KB%=(IB%+JB%)/2
187: IF WORD$>KEYWD$(KB%) THEN \
188:   IB%=KB%+1 \
189:   ELSE JB%=KB%-1
190: IF (WORD$<>KEYWD$(KB%)) AND (IB%<=JB%) THEN 19.1E1
191: IF WORD$<>KEYWD$(KB%) THEN 19.3E1
192: I%=IR%+I%-1
193: RETURN
194:
195: 19.3E1 PRINT USING "CANNOT FIND KEYWORD \###$"; W.NUM%
196: INPUT "PRESS RETURN TO RE-ENTER COMPLETE LINE "; LINE ANS$
197: ERR%=-1 : RETURN
```

Additional listing on page 400

www.americanradiohistory.com

EAGLE

64K Ram
780 KB Disk Storage
Word Processing, Ultracalc CP/M
C-Basic Software
Smith Corona TP 1
Letter Quality Printer

$2995.00

EAGLE 1600..... CALL

TeleVideo

TERMINALS

910	$579.00
912C	$699.00
920C	$749.00
925C	$749.00
950	$950.00
WYSE WY100	$749.00

COMPUTERS

800A	$1299.00
802	$2649.00
802H	$4695.00
806	$4999.00
816	$8999.00
303	CALL
1602 1603	CALL

commodore

8032	$1039.00
4032	$749.00
8096 Upgrade Kit	$369.00
Super Pet	$1499.00
2031	$469.00
8250 Dbl.Sided Disk Drive	$1699.00
D9060 5 Meg. Hard Disk	$2399.00
D9060 7.5 Meg. Hard Disk	$2699.00
8050	$1299.00
4040	$969.00
8300 (Letter Quality)	$1549.00
8023	$599.00
4022	$399.00
New Z-Ram. Adds CP/M & 64K	$549.00
The Manager	$209.00
Magis	CALL
Word Pro 5 Plus	$319.00
Word Pro 4 Plus	$299.00
Word Pro 3 Plus	$199.00
The Administrator	$379.00
Info Pro Plus	$219.00
Power	$79.00

commodore

VIC 20

$149

VIC 20 Dust Cover	$9.99
VIC 1530 Datassette	$69.00
VIC 1541 (64K Disk Drive)	$339.00
VIC 1525 Graphic Printer	$339.00
VIC 1210 3K Mem. Exp.	$32.00
VIC 1110 8K Mem. Exp.	$53.00
VIC 1111 16K Mem. Exp.	$94.00
VIC 1011 RS232C Term. Interface	$43.00
VIC 1112 IEEE-488 Interface	$86.00
VIC 1211 Super Expander	$53.00
VIC Mother Board	$99.00

NEC

COMPUTERS

8001A	$719.00
8031	$719.00
8012	$549.00

PRINTERS

8023	$469.00
7710 7730	$2399.00
3510 3530	$1599.00

MONITORS

JB-1260	$119.00
JB-1201	$149.00
JC-1212	$299.00
JC-1203	$629.00

TIMEX SINCLAIR 1000

$85.

16K Memory Module	$44.95
Vu-Calc	$17.95
Check Book Manager	$13.95
The Organizer	$14.95
The Budgeter	$13.95
Stock Option	$14.95
Loan & Mortgage Amortizer	$12.95
Mindware Printer	$109.00

SHARP PC-1500 POCKET COMPUTER

$169

CE 150 Printer, Plotter and Cassette Interface Unit	$172.00
CE 152 Cassette Recorder	$62.00
CE 155 8K Ram Expansion Module	$94.00
CE 125 Printer/Micro Cassette	$129.00

commodore

VIC 64

$429.

PROFESSIONAL SOFTWARE

Word Processing for VIC 64 .... $79.95

MONITORS

AMDEK

100 B & W	$74.95
300G	$169.00
300A	$179.00
Color I	$339.00
Color II	$699.00
Color II A	$799.00
Color III	$399.00
Color IV	CALL

BMC

12" Green	$79.99
13" Color 1401 (Mid Res)	$369.00
9191U 13"	$329.00

TAXAN

RGB 1	$329.00

ZENITH

ZVM 121	$99.00

SHARP

Sharp 13" Color TV	$275.00

PANASONIC

TR-120MP (High Res. Green)	$159.00
CT-160 Dual Mode Color	$299.00

PRINTERS

SMITH CORONA

TP 1	$599.00

C. ITOH (TEC)

Starwriter (F10-40CPS)	$1399.00
Printmaster (F10-55CPS)	$1749.00
Prowriter 80 Col (Parallel)	$499.00
Prowriter 80 Col. (Serial)	$629.00
Prowriter 2 (132 Col.)	$799.00

OKIDATA

82A	$429.00
83A	$659.00
84 (Parallel)	$1049.00
84 (Serial)	$1149.00

IDB

MicroPrism	$649.00
132 (Fully Configured)	$1599.00
80 (Fully Configured)	$1399.00

Call for other configurations.

STAR

Gemini 10	$379.00
Gemini 15	$489.00

DAISYWRITER

Letter Quality	1049.00

DIABLO

620	$999.00
630	$1769.00

MODEMS

HAYES

Smart	$229.00
Smart 1200 (1200 Baud)	$549.00
Chronograph	$199.00
Micromodem 100	$309.00
Micromodem II	$279.00
Micromodem II (with Terms)	$299.00

NOVATION

Cat	$144.00
D-Cat	$159.00
212 Auto Cat	$589.00
Apple Cat II	$279.00
212 Apple Cat II	$609.00
J-Cat	$119.00
Cat 103	$199.00
Cat 103/212	$439.00

ANCHOR

Mark I (RS-232)	$79.00
Mark II (Atari)	$79.00
Mark III (TI-99)	$109.00
Mark IV (CBM/PET)	$125.00
Mark V (OSBORNE)	$95.00
Mark VI (IBM-PC)	$179.00
Mark VII (Auto Answer Call)	$119.00
TRS-80 Color Computer	$99.00
9 Volt Power Supply	$9.00

IBM

NEC

3550 PRINTER... $2099

PERCOM DRIVES

5¼" 160K Disk Drive	$249.00
5¼" 320K Disk Drive	$299.00

AMDEK

310A Amber Monitor	$179.00
310G	$179.00
Amdisk (3½" Drive)	$729.00
DXY Plotter	$759.00
Color II	$699.00

SOFTWARE

I.U.S. Easywriter II	$249.00
I.U.S. Easyspeller	$129.00
Peach Package (GL/AP/AR)	$419.00

PROFESSIONAL SOFTWARE

IBM/PC Word Processing	$319.00

MICRO PRO

Word Star/Mail Merge	$399.00

Circle 104 on inquiry card. **computer mail order east**

800-233-8950

IN PA. CALL (717)327-9575, 477 E.THIRD ST., WILLIAMSPORT, PA. 17701

In stock items shipped same day you call. No risk, no deposit on C.O.D. orders. Pre-paid orders receive free shipping within the Continental United States with no waiting period for certified checks or money orders. Add 3% (minimum $3.00) shipping and handling on all C.O.D. and Credit Card orders. NY. and PA. residents add sales tax. All items subject to availability and price change. **NOTE:** We stock manufacturer's and third party software for most all computers on the market. Call today for our new catalogue.

www.americanradiohistory.com

FRANKLIN

ACE 1000
ACE 10 with Controller Card
ACE Writer Word Processor
CALL...
FOR SYSTEM PRICE!
Ace 1000 ..... CALL

SYSCOM II

48K Color Computer
100% Apple Compatible
Apple Soft Basic

$769.00

VISICORP

for Apple, IBM & Franklin

Visidex	$189.00
Visifile	$189.00
Visiplot	$159.00
Visiterm	$89.00
Visitrend/Plot	$229.00
VisiSchedule	$229.00
Desktop Plan	$189.00
Visicalc(Apple II+,Atari,CBM,IBM)	$179.00

Visicorp prices for IBM may vary slightly.

CONTINENTAL

Home Accnt. (Apple/Franklin)	$59.00
Home Accountant (IBM)	$119.00
1st Class Mail (Apple/Franklin)	$59.00

SIRIUS

Free Fall	$24.00
Beer Run	$24.00
Snake Byte	$24.00
Space Eggs	$24.00
Sneakers	$24.00
Bandits	$28.00

BRODERBOUND

Apple Panic	$23.00
David's Magic	$27.00
Star Blazer	$25.00
Arcade Machine	$34.00
Choplifter	$27.00
Serpentine	$27.00

INFOCOM

Deadline	$35.00
Star Cross	$29.00
Zork I	$29.00
Zork II or III	$29.00

MPC

Bubdisk (128K Ram)	$719.00

AXLON

Apple/Franklin 128K Ram	$399.00
Apple/Franklin Ram Disk	$999.00

VU-MAX

80 Column Card	$159.00

PERCOM

DISK DRIVES FOR ATARI

AT 88-S1	$399.00
AT 88-A1	$289.00
RFD 40-S1	$539.00
RFD 40-A1	$329.00
RFD 40-S2	$869.00
RFD 44-S1	$659.00
RFD 44-S2	$999.00

RANA DISK DRIVES

Call for price and availability on the new Rana Disk Drives for The Apple and Franklin Computer Systems.

μ-SCI

MICRO-SCI

DISK DRIVES FOR APPLE & FRANKLIN

A2	$299.00
A40	$349.00
A70	$459.00
C2 Controller	$79.00
C47 Controller	$89.00

FLOPPY DISKS

MAXELL

MD I (Box of 10)	$32.00
MD II (Box of 10)	$44.00
FD I (8")	$40.00
FD II (8" DD)	$50.00

VERBATUM

5¼" SS DD	$26.00
5¼" DS DD	$36.00

ELEPHANT

5¼" SS SD	$19.99

HEWLETT PACKARD

hp 41CV

$209

HP 41C	$149.00
HP 10C	$59.00
HP 11C	$72.00
HP 12C	$99.00
HP 15C	$99.00
HP 16C	$99.00

HPIL PERIPHERALS In Stock
Call for
CALCULATOR SPECIALS

ATARI® HOMECOMPUTERS

400

16K.....$199
32K.....$274*
48K.....$359*
*Non-Atari Ram

410 Recorder	$74.00
810 Disk Drive	$429.00
822 Printer	$269.00
825 Printer	$589.00
830 Modem	$159.00
820 Printer	$259.00
850 Interface	$169.00
CX40 Joy Sticks (pair)	$18.00
CX853 Atari 16K Ram	$77.95

800

48K.....$499

Call for Price and Availability of the NEW

64K ATARI 1200

Axlon 32K Ram	$89.00
Axlon 48K Ram	$139.00
Axlon 128K Ram	$399.00
Intec 48K Board	$159.00
Intec 32K Board	$74.00
One Year Extended Warranty	$70.00
CX481 Entertainer Package	$69.00
CX482 Educator Package	$130.00
CX483 Programmer Package	$54.00
CX484 Communicator Package	$344.00

SOFTWARE FOR ATARI

ATARI

Pac-Man	$33.00
Centipede	$33.00
Caverns of Mars	$32.00
Asteroids	$29.00
Missile Command	$29.00
Star Raiders	$35.00
Galaxian	$33.00
Defender	$33.00

ON-LINE

Jawbreaker	$27.00
Softporn	$27.00
Wizard and the Princess	$29.00
The Next Step	$34.00
Mission Asteroid	$22.00
Mouskattack	$31.00
Frogger	$31.00
Cross Fire (ROM)	$36.00

SYNAPSE

File Manager 800	$69.00
Chicken	$26.00
Dodge Racer	$26.00
Synassembler	$30.00
Page 6	$19.00
Shamus	$26.00
Protector	$26.00
Nautilus	$26.00
Slime	$26.00
Disk Manager	$24.00

DATASOFT

Pacific Coast Highway	$25.00
Canyon Climber	$25.00
Tumble Bugs	$25.00
Shooting Arcade	$25.00
Clowns and Balloons	$25.00
Graphic Master	$30.00
Graphic Generator	$13.00
Micro Painter	$25.00
Text Wizard	$79.00
Spell Wizard	$64.00
Bishop's Square	$25.00
Sands of Egypt	$25.00

APX

Text Formatter	$18.50
Family Budgeter	$18.50
Eastern Front	$24.00
Family Cash	$18.50
Jukebox	$13.50
Downhill	$18.50
Outlaw	$18.50
Holy Grail	$24.00
Player Piano	$18.50
Keyboard Organ	$18.50
Number Blast	$13.50
Frogmaster	$18.50
747 Land Simulator	$18.50
Bumper Pool	$13.50

CBS

K-razy Shoot Out	$32.00
K-razy Kritters	$32.00
K-razy Antics	$32.00
K-star Patrol	$32.00

EPYX

Crush, Crumble & Chomp	$24.00
Crypt of the Undead	$24.00
Curse of Ra	$16.00
Datestones & Ryn	$16.00
Invasion Orion	$19.00
King Arthur's Heir	$24.00
Morloc's Tower	$16.00
Rescue at Rigel	$24.00
Ricochet	$16.00
Star Warrior	$29.00
Temple of Asphai	$29.00
Upper Reaches of Apshai	$16.00

WICO
Joy Sticks

for Atari, Commodore, Apple & Franklin
CALL

computer mail order west

Circle 104 on inquiry card.

800-648-3311

IN NV. CALL (702)588-5654, P.O. BOX 6689, STATELINE, NV. 89449

INTERNATIONAL ORDERS: All shipments outside continental United States must be pre-paid by certified check only! Include 3% (minimum $3.00) shipping and handling.
EDUCATIONAL DISCOUNTS: Additional discounts are available from both Computer Mail Order locations to qualified Educational Institutions.
APO & FPO: Add minimum $5.00 shipping on all orders.

CP/M is a registered trademark of Digital Research, Inc

www.americanradiohistory.com

Circle 433 on Inquiry card.

SUPERBRAIN

The super performing, super reliable microcomputer from Intertec Data Systems features twin double-density 5¼" drives with 350K or 700K of disk storage – expandable to 10 megabytes. A CP/M* Disk Operating System, 64K of dynamic RAM and more.

SUPER PRICE

Because we're a nationwide distributor of SuperBrain, CompuStar, and the CompuStar 10-Megabyte Disk Storage System, we can offer the absolute lowest prices in the business.

SUPER SERVICE

Better yet, we offer you a great deal of service and support because we want your business tomorrow as well as today.

- We'll burn-in your SuperBrain for 72 hours before we deliver it
- We'll help with installation and configuration
- We'll repair equipment at our service center and replace modules when necessary
- We'll fill your software needs or help you develop your own
- We'll match your SuperBrain with a super printer

For more information call 609-424-4700 or 215-629-1289. To order call toll-free 800-257-5217. In NJ call 609-424-4700.

TRISTAR

2 Keystone Avenue
Cherry Hill, NJ 08003

* Registered trademark of Digital Research Inc
SuperBrain and CompuStar are trademarks of Intertec Data Systems.

INTERTEC DATA SYSTEMS®

Listing 6: *CMPRBIB, called by menu selection 5, compresses the file of articles by removing all articles that have been marked for deletion by BIBLD.*

```
1:   REM------FILE CMPRBIB.BAS
2:
3:   REM COMPRESS BIBLIOGRAPHY FILE BY REMOVING MARKED ARTICLES
4:
5:   COMMON KEYWD$(1),LIBNAME$,RLEN%,TRUE%,AUTH.LEN%,TITL.LEN%
6:   COMMON MAXBIB%,MAXDESC%,MAXDEF%,MAXKEYS%,MAXCON%,CONCEPT$(1)
7:   COMMON ISS.LEN%,CLS$,ERR%,JOUR.LEN%,KWD.LEN%,CMD$(1)
8:   COMMON LFT%(1),RGHT%(1),CON.KEY%(2),CON.RATE(2),QUERY$,L%
9:
10:  PRINT CLS$
11:  PRINT TAB(12);"------COMPRESS BIBLIOGRAPHY------"
12:  PRINT
13:
14:  REM IF NO BIBLIO FILE THEN GO BACK TO MENU
15:  IF END #2 THEN 5.9E1
16:  OPEN LIBNAME$+".BIB" RECL RLEN% AS 2
17:  IF SIZE(LIBNAME$+".BIB")=0 THEN \
18:    DELETE 2 : GOTO 5.9E1
19:
20:  REM OTHERWISE SCAN AND DELETE
21:  R.REC%=1 : W.REC%=1 : DEL%=0
22:  IF END #2 THEN 5.8E1
23:  READ #2,1; LINE BUFF$
24:  WHILE TRUE%
25:    READ #2,R.REC%;LINE BUFF$
26:    IF LEFT$(BUFF$,5)="ZZZZZ" THEN 5.2E1
27:      IF R.REC%<>W.REC% THEN \
28:        PRINT USING "&"; #2;W.REC%; BUFF$
29:      R.REC%=R.REC%+1 : W.REC%=W.REC%+1
30:      GOTO 5.3E1
31:    5.2E1 R.REC%=R.REC%+1 : DEL%=DEL%+1
32:    5.3E1 WEND
33:  5.8E1 PRINT USING "&"; #2,W.REC%; CHR$(26)
34:  PRINT USING "######"; #2,1; W.REC%-2
35:  CLOSE 2
36:  PRINT W.REC%-2; " ARTICLES ON FILE"
37:  PRINT DEL%; " ARTICLES WERE REMOVED"
38:  5.5E1 INPUT "PRESS RETURN TO GO BACK TO MENU";LINE ANS$
39:  CHAIN "BIBLIO"
40:  5.9E1 PRINT "NO BIBLIO FILE NAMED ";LIBNAME$
41:  GOTO 5.5E1
```

Listing 7: *BIBSRCH, called by menu selection 4, is the first of two programs that execute in sequence to search the file of articles and report the results. BIBSRCH receives an interrogation from the user, checks it for syntax, and interacts with the user to define the interrogation in terms of vocabulary keywords.*

```
1:   REM -------FILE BIBSRCH.BAS
2:
3:   REM FIRST SEGMENT OF BIBLIOGRAPHY SEARCH ROUTINE
4:   COMMON KEYWD$(1),LIBNAME$,RLEN%,TRUE%,AUTH.LEN%,TITL.LEN%
5:   COMMON MAXBIB%,MAXDESC%,MAXDEF%,MAXKEYS%,MAXCON%,CONCEPT$(1)
6:   COMMON ISS.LEN%,CLS$,ERR%,JOUR.LEN%,KWD.LEN%,CMD$(1)
7:   COMMON LFT%(1),RGHT%(1),CON.KEY%(2),CON.RATE(2),QUERY$,L%
8:   DIM LFT%(MAXCON%), CONCEPT$(MAXCON%), CON.KEY%(MAXCON%,MAXDEF%+1)
9:   DIM CON.RATE(MAXCON%,MAXDEF%+1),RGHT%(MAXCON%),CMD$(MAXCON%)
10:  CONSOLE
11:  ERR%=0
12:  BLANK$="                                                    "
13:  PRINT CLS$
14:  PRINT TAB(12); "--------BIBLIOGRAPHY SEARCH--------"
15:  PRINT
16:
17:  REM READ KEYWORD VOCABULARY
18:
19:  REM IF NO VOCABULARY FILE EXIT TO SYSTEM
20:  IF END #1 THEN 34E1
21:  OPEN LIBNAME$+".VOC" AS 1
22:  IF SIZE(LIBNAME$+".VOC")=0 THEN \
23:    DELETE 1 : GOTO 34E1
24:
25:  REM OTHERWISE READ IT ALL
26:  IF END #1 THEN 33E1
27:  VOC.LEN%=1
28:  WHILE TRUE%
29:    READ #1; LINE KEYWD$(VOC.LEN%)
30:    VOC.LEN%=VOC.LEN%+1
31:    WEND
32:  33E1 CLOSE 1
33:  VOC.LEN%=VOC.LEN%-1
34:
35:  REM IF NO BIBLIO FILE, EXIT TO SYSTEM
```

Listing 7 continued on page 402

www.americanradiohistory.com

Our Prices Will Get Your Attention. Our Service Will Keep It.

TELEVIDEO SYSTEMS

ORDER NO.	DESCRIPTION	LIST	AEI PRICE
TS-802	Integrated Single User Computer	3295	2632
TS-802H	Integrated Hard Disk Computer	5995	Call
TS-1602G	16 Bit 802 Type Computer	4495	Call
TS-1602GH	16 Bit 802H Type Computer	6995	Call
TS-806-20	Multi-User Computer	7195	Call
TS-816	Multi User Computer	8995	Call
TV-910-P	Televideo 910 Plus	699	573
TV-910	Televideo 910	699	573
TV-912	Televideo 912C	925	685
TV-920	Televideo 920C	995	737
TV-925	Televideo 925	995	745
TV-950	Televideo 950	1195	921
TV-9010	Second Page Option 912/920	80	50
TV-9050	One Additional Page for 925/950	95	62
TV-9051	Three Additional Pages for 950	120	95
TV-MM	For Any Televideo Terminal	60	53
TS-24-001	TeleSolutions WordStar - CalcStar	790	Call
TS-100	WordStar	495	280
TS-150	SpellStar	250	154
TS-200	MailMerge	250	171
TS-300	DataStar	295	238
TS-400	Supersort	250	164
TS-1000	CalcStar	145	128
TS-806H/20	20 MB Expansion for TS-806	3600	2948
TS-TW	Telewriter - NEC 3500	2195	1629

SOFTWARE

NORTHSTAR

NS-94404	Adv-2Q-64K Computer	3599	Call
NS-97404	Adv-1Q-64K-HD-5 Computer	4999	Call
NS-94401	Hrz-2Q-64K Horizon	3599	Call
NS-97401	Hrz-1Q-64K-HD-5MB	4999	Call

PLUS OTHER NORTHSTAR PRODUCTS

ZENITH

ZVM-121	Green Screen Monitor	160	99
Z-19-CN	Z-19 Terminal	895	672
ZT-1-A	Auto-Dial Terminal	699	526
Z-25-AA	Z-25 Dot Matrix Printer	1499	1198
Z-89-81	Z-89 Computer System	2499	1952
Z-90-82	Z-90 Computer System	2799	2176
Z-89-X	Z-89 w/o Integral Drive	2495	1749
Z-90-80	Z-90 w/o Integral Drive	2895	1950
Z-37	Z-37 Dual 5" Disk Drives	1995	1593
Z-87-89	Z87 Dual 5" Disk Drives	999	898
Z-87-90	Same Disk add 400K to Z-90	999	898
ZS-67	Z-67 Winchester - Floppy Drive	5995	4747
Z-47-DA	Z47 Dual 8" Disk Drives	3695	Call

PLUS: MORROW · ALTOS · EAGLE · NEC PERSONAL · FRANKLIN ACE

NEC PRINTERS

ORDER NO.	DESCRIPTION	LIST	AEI PRICE
NE-3510-1	NEC 3510 Spinwriter R/O Serial 35 CPS	1895	1500
NE-3515-1	NEC 3515 Spinwriter R/O Serial Diablo Compatible	1925	1594
NE-3530-1	NEC 3530 Spinwriter	2190	1764
NE-3550-1	NEC 3550 Spinwriter R/O Parallel IBM Compatible	2350	2065
NE-35-TRAC	Bi-directional Tractor	265	237
NE-7710-1	NEC 7710 Spinwriter R/O Serial 55 CPS	3085	2276
NE-7715-1	NEC 7715 Spinwriter R/O Serial Diablo Comp.	3165	2600
NE-7720-1	NEC 7720 Spinwriter KSR Serial 55 CPS	3610	2917
NE-7725-1	NEC 7725 Spinwriter KSR Serial Diablo Comp.	3710	3041
NE-7730-1	NEC 7730 Spinwriter	3085	2276
NE-PC-8023	Parallel	695	506

PLUS OTHER ACCESSORIES

STAR MICRONICS

DP-8480-TP	80 Column Dot Matrix Printer - Parallel	449	Call
DP-8480-TS	80 Column Dot Matrix Printer - Serial	464	Call
Gemini-10	10" Carriage - Parallel	499	Call
Gemini-15	15" Carriage - Parallel	649	Call
	Serial Interface Card	85	Call
DP-8240	40 Column Dot Matrix - Parallel or Serial	250	Call

OKIDATA

OK-82A	Okidata Microline 82A with Tractor Feed	719	486
OK-83A	Okidata Microline 83A	1195	713
OK-84A-P	Okidata Microline 84A - Parallel	1395	Call
OK-84A-S	Okidata Microline 84A - Serial	1495	Call
OK-G-82	Okigraph I for 82A	99	36
OK-G-83	Okigraph I for 83A	99	36
OK-2K	2K Buffer/Serial BD all Models	140	119

MANNESMANN TALLY

MT1605	Serial 200 CPS	1695	1441
MT1602	Parallel 200 CPS	1695	1441
MT1805	Serial - 200 CPS or 50 CPS	1995	Call
MT1802	Parallel - 200 CPS or 50 CPS	1995	Call
MT160L	S or P - 160 CPS	990	809

PLUS: ANADEX · C-ITOH · DATA SOUTH · TI · DIABLO · COMREX

ALSO AVAILABLE:

MODEMS · DISKETTE STORAGE BOXES · DISKETTES · CLIPSTRIP · RIBBONS

SOFTWARE AVAILABLE

ORDER NO.	DESCRIPTION	LIST	AEI PRICE
	Altos CP/M 5¼"		
	Apple CP/M 5¼"		
	Apple DOS — Cassette		
	Apple DOS — Diskette		
	Atari 400/800 Diskette		
	Atari Cartridge		
	Atari Cassette		
	Basic 4 CP/M 5¼"		
	CP/M-86 Display Writer		
	Cromemco CP/M 5¼"		
	DEC VT-180 CP/M 5¼"		
	Eagle CP/M 5¼"		
	Heath Z-90 CP/M 5¼"		
	Heath Zenith CP/M 5¼"		
	Hewlett Packard 125 CP/M 5¼"		
	Hewlett Packard 8 7 CP/M 5¼"		
	IBM P.C. CP/M 86		
	IBM P.C. DOS		
	NEC CP/M 5¼"		
	Northstar Advantage CP/M 5¼"		
	Northstar Horizon CP/M 5¼"		
	Ohio Scientific C-3 CP/M 5¼"		
	Osborne CP/M 5¼"		
	Otrona CP/M 5¼"		
	QD-Micropolis Mod II/Vector Graphic		
	Sanyo 1000 CP/M 5¼"		
	Sirius Victor 5¼"		
	Software for 8086 Computers		
	Standard CP/M 5¼"		
	Superbrain 5¼"		
	Timex/Sinclair ZX81		
	TRS-80 Cassette Models I & III		
	TRS-80 Diskette Models I & III		
	TRS-80 Model II CP/M		
	Televideo CP/M 5¼"		
	Vic 20		
	Wang CP/M 5¼", 8"		
	Xerox 820 CP/M 5¼"		

CALL FOR CURRENT PRICING

MARCH SPECIALS

PALANTIER™ WORD PROCESSOR WITH MAILOUT™

Powerful dot, flexible dot, easy to use!

Compatible With:	MARCH AEI PRICE
· Northstar Advantage · Televideo 802 · 8" IBM Standard - IBM PC-DD · Superbrain II · Superbrain IID · Kpro	$300
Apple II (64K) CPM	$235
Franklin Ace 1000 · 64K Ram · 10 Key Numeric Pad · U/L Case Keyboard · Muffin Fan	Call

GUARANTEE

- PROVEN PRODUCTS
- SYSTEM DESIGN HELP
- BENCH TESTING AND CONFIGURING
- TECHNICAL SUPPORT STAFF
- SERVICE AFTER SALE:

(800) 854-7635 TECHNICAL SERVICE SUPPORT

We will pay the freight — both ways — for repair on verified returns within 30 days of sale.

TERMS AND CONDITIONS

Prices change daily. Call for current pricing and availability. Prices based on prepaid cash orders. We accept: cashiers checks, money orders, bank wires, or personal checks (10 days to clear). C.O.D. — standard charges plus 2% handling for orders outside California. Mastercharge & Visa — 5% handling. California residents add 6% sales tax.

VISA Prices change daily — call for current pricing. MasterCard

CALL TOLL FREE:

800-854-7635

IN CALIFORNIA CALL:

(619) 562-7571

AUTOMATED EQUIPMENT, INC.

8775 Olive Lane, Suites I & J · Santee, CA 92071

Circle 39 on Inquiry card.

www.americanradiohistory.com

Circle 390 on inquiry card.

Now Attractive Industrial Quality Main Frames

as low as $200

- Dual LED Display
- Shock Mounted 6 Slot Mother Boards/Card Cage
- PS-101 Power Supply
- Power & Reset Switches, A/C Filter, Fan, Etc.

SDS-S100-SL
8" Floppy Drive Enclosure/System
Special Lift Out Drive Rack
Fits all Regular and Slim-Line 8" Drives
Also Will Support 5¼" Hard Disk

SDS-S100-MFL
5¼" Floppy and/or Hard Drive Enclosure/System

SDS-MF2 SDS-MIC
12 Slot S100 Computer Chassis or 8" Micropolis Hard Disk Cabinet

PS-101 Power Supply
This solid supply gives you the capability of running any variety of 8" floppy or 5¼" floppy or hard disk drives as well as power a full S100-Buss

Regulated:	Unregulated:
8V @ 8 amp	+16V @ 1 amp
+5V @ 5 amp	−16V @ 1 amp
+12V @ 5 amp	
+24V @ 5 amp	
−5 or −12V @ 1 amp	

SIERRA DATA SCIENCES
Fresno, California
Marketing Division
21162 Lorain Road, Fairview Park, Ohio 44126
(216) 331-8500 TELEX: 980131 WDMR

See our other ad on page 39

Listing 7 continued:

```
36:  IF END #2 THEN 34E1
37:  OPEN LIBNAME$+".BIB" AS 2
38:  IF SIZE(LIBNAME$+".BIB")=0 THEN \
39:    DELETE 2 : GOTO 34E1
40:  CLOSE 2
41:
42:  REM OTHERWISE GET A QUERY, CHECK SYNTAX AND PARSE
43:  GOSUB 1E1
44:
45:  REM THEN DEFINE QUERY IN TERMS OF KEYWORDS IN VOCABULARY
46:  GOSUB 18E1
47:
48:  REM NOW TO THE REST OF SEARCH ROUTINE
49:  CHAIN "BIBSR2"
50:  STOP
51:
52:  REM FUNCTION TO RECOGNIZE FUZZY OPERATORS AND PARENS
53:  DEF FNSPEC.CH%(DUM$,POSIT%)
54:  CH$=MID$(DUM$,POSIT%,1)
55:  FNSPEC.CH%=0
56:  IF (CH$="$") OR ((CH$>="'") AND (CH$<="+")) THEN FNSPEC.CH%=-1
57:  RETURN
58:  FEND
59:
60:  REM GET AND PARSE AN INTERROGATION PHRASE
61:  1E1 ERR%=0
62:  1.2E1 QUERY$=""
63:  PRINT "ENTER INTERROGATION PHRASE"
64:  INPUT ">"; LINE QUERY$
65:  QUERY$=UCASE$(QUERY$)
66:
67:  REM ROUGH SYNTAX CHECK
68:  I%=1
69:  IF LEFT$(QUERY$,1)<>"(" THEN \
70:    ERR%=3 : GOSUB 9E1 : ERR%=0 : GOTO 1.2E1
71:  PAREN%=0
72:  WHILE I%<=LEN(QUERY$)
73:    IF MID$(QUERY$,I%,1)="(" THEN PAREN%=PAREN%+1
74:    IF MID$(QUERY$,I%,1)=")" THEN PAREN%=PAREN%-1
75:    I%=I%+1
76:    WEND
77:  IF PAREN% THEN ERR%=4 : GOSUB 9E1: ERR%=0 : GOTO 1.2E1
78:
79:  REM NOW TO PARSE
80:  PTR.ONE%=1 : PTR.TWO%=1: L%=0
81:  1.1E1 WHILE (FNSPEC.CH%(QUERY$,PTR.ONE%)) AND (PTR.ONE%<LEN(QUERY$))
82:    PTR.ONE%=PTR.ONE%+1
83:    WEND
84:  IF PTR.ONE%>=LEN(QUERY$) THEN RETURN
85:  L%=L%+1
86:  LFT%(L%)=PTR.ONE%
87:  PTR.TWO%=PTR.ONE%
88:  WHILE NOT FNSPEC.CH%(QUERY$,PTR.TWO%)
89:    PTR.TWO%=PTR.TWO%+1
90:    WEND
91:  RGHT%(L%)=PTR.TWO%
92:  CONCEPT$(L%)=MID$(QUERY$,LFT%(L%),RGHT%(L%)-LFT%(L%))
93:  PTR.ONE%=PTR.TWO%
94:  GOTO 1.1E1
95:  RETURN
96:
97:
98:  9E1 REM ERROR COMMENTOR
99:  ON ERR% GOTO 9.1E1,9.2E1,9.4E1,9.5E1,9.6E1
100: 9.1E1 PRINT "AN ILLEGAL KEYWORD INPUT--";
101: GOTO 9.3E1
102: 9.2E1 PRINT "RATINGS MUST BE IN RANGE 0.0...1.0--";
103: GOTO 9.3E1
104: 9.4E1 PRINT "ENTIRE PHRASE MUST BE ENCLOSED IN PARENS--";
105: GOTO 9.3E1
106: 9.5E1 PRINT "RIGHT AND LEFT PARENS MUST BE BALANCED--";
107: GOTO 9.3E1
108: 9.6E1 PRINT "KEYWORDS MAY NOT CONTAIN BLANKS--";
109: 9.3E1 PRINT "RE-ENTER PHRASE"
110: RETURN
111:
112:
113: 18E1 REM DEFINE CONCEPTS IN TERMS OF KEYWORDS
114: PRINT "PLEASE DEFINE EACH OF THE CONCEPTS YOU HAVE ENTERED"
115: PRINT "IN TERMS OF KEYWORDS AND THEIR APPLICABILITY"
116: PRINT "EXAMPLE : THEORY 0.6 APPLICATIONS 0.8"
117: PRINT
118: FOR J%=1 TO L%
119:   18.3E1 KEY%=0
120:   PRINT CONCEPT$(J%);
121:   INPUT ": "; LINE CMD$(J%)
122:   CMD$(J%)=UCASE$(CMD$(J%))
123:   SW%=-1 : I%=1
124:   WHILE (I%<LEN(CMD$(J%))) AND (KEY%<MAXDEF%)
125:     WHILE MID$(CMD$(J%),I%,1)=" " : I%=I%+1 : WEND
126:     DUM$=RIGHT$(CMD$(J%),LEN(CMD$(J%))-I%+1)
127:     IF NOT SW% THEN 18.7E1
128:       KEY%=KEY%+1
129:       GOSUB 8E1
130:       CON.KEY%(J%,KEY%)=KB%
131:       SW%=0
```

Listing 7 continued on page 404

www.americanradiohistory.com

THE FORTH SOURCE™

MVP-FORTH – A Public Domain Product

MVP Forth is fig-FORTH modified by 100% of the FORTH-79 Standard Required Word Set plus the vocabulary for the instructional book *Starting FORTH*. Editor, assembler and utilities are included.

Transportability of programs is assured since the kernal of MVP-FORTH is the same for all computers to the machine dependent READ/WRITE instructions.

Modification and extension (up or down) is simplified by having the source code and through the use of MVP-FORTH Programming Aids and Cross Compilers.

The CP/M® are supplied on 8", SS/SD, IBM 3740, format disks. The include a track and sector calculation array for down loading to other sizes and formats. Other disks are machine specific.

All About FORTH is an annotated glossary of MVP-FORTH words as well as other dialects. It is in 8080 code, other MVP-FORTH implementations include documentation of the differences between it and other CPU's and computers.

MVP-FORTH PRODUCTS for CP/M® IBM-PC® and Apple®

- ☐ **MVP-FORTH Programmer's Kit** including disk with documentation, ALL ABOUT FORTH, and STARTING FORTH. Assembly source listing versions. $100
- ☐ **MVP-FORTH Disk** with documentation. Assembly source listing version. $75
- ☐ **MVP-FORTH Cross Compiler** with MVP-FORTH source in FORTH. $300
- ☐ **MVP-FORTH Programming Aids** for decompiling, callfinding, and translating. Specify computer. $150
- ☐ **MVP-FORTH Fast Floating Point** for Apple II/II+ on board with 9511 math chip. Requires MVP-FORTH for Apple $400
- ☐ **MVP-FORTH Assembly Source** Printed listing. $20
- ☐ **ALL ABOUT FORTH** by Haydon. MVP-FORTH reference, plus fig-FORTH and FORTH-79. $20

★★★ MVP-FORTH operates under a variety of CPU's, computers, and operating systems. Specify your computer and operating system. CP/M supplied on 8", SS/SD, 3740 format. ★★★

FORTH DISKS

FORTH with editor, assembler, and manual.

- ☐ **APPLE II/II+** by MicroMotion $100
- ☐ **APPLE II** by Kuntze $90
- ☐ **ATARI** valFORTH $50
- ☐ **CP/M®** by MicroMotion $100
- ☐ **CROMEMCO®** by Inner Access $100
- ☐ **HP-85** by Lange $90
- ☐ **IBM-PC®** by Laboratory Microsystems $100
- ☐ **NOVA** by CCI, quad floppy $100
- ☐ **PET™** by FSS $90
- ☐ **TRS-80/I®** by Nautilus Systems $90
- ☐ **6800** by Talbot Microsystems $100
- ☐ **6809** by Talbot Microsystems $100
- ☐ **Z80** by Laboratory Microsystems $50
- ☐ **8086/88** by Laboratory Microsystems $100
- ☐ **VIC FORTH** byHES, VIC20 cartridge $60

Enhanced FORTH with: F-Floating Point, G-Graphics, T-Tutorial, S-Stand Alone, M-Math Chip Support, MT-Multi-Tasking, X-Other Extras, 79-FORTH-79.

- ☐ **APPLE II/II+** by Micro-Motion, F, G, & 79 $140
- ☐ **ATARI** by PNS, F, G, & X. $90
- ☐ **CP/M** by MicroMotion, F & 79 $140
- ☐ **Apple II/II+, GraFORTH** by Insoft, stand alone graphics $75
- ☐ **H89/Z89** by Haydon, T & S $250
- ☐ **H89/Z89** by Haydon, T $175
- ☐ **IBM-PC, PolyFORTH** by FORTH Inc., F, G, S, M, MT, & X $300
- ☐ **Multi-Tasking FORTH** by Shaw Labs, CP/M, X & 79 $395
- ☐ **TRS-80/I or III** by Miller Microcomputer Services, F, X, & 79 $130
- ☐ **TUTORIAL** by Laxen & Harris, CP/M with a copy of *Starting FORTH* $95
- ☐ **Extensions** for Laboratory Microsystems IBM,Z80, and 8086
  - ☐ Software Floating Point $100
  - ☐ 8087 Support (IBM-PC or 8086) $100
  - ☐ 9511 Support (Z80 or 8086) $100
  - ☐ Color Graphics (IBM-PC) $100
  - ☐ Data Base Management $200

CROSS COMPILERS Allow extending, modifying and compiling for speed and memory savings, can also produce ROMable code. •Requires FORTH disk.

☐ CP/M	$300	☐ IBM•	$300
☐ H89/Z89	$300	☐ 8086•	$300
☐ TRS-80/I	$300	☐ Z80•	$300
☐ Northstar•	$300	☐ Apple II/II+	$350

☐ **fig-FORTH Programming Aids** for decompiling, callfinding, and translating. Specify CP/M, IBM-PC, 8086, Z80, or Apple II/II+ $150

FORTH MANUALS, GUIDES & DOCUMENTS

- ☐ **ALL ABOUT FORTH** by Haydon. An annotated glossary of common FORTH words. MVP-FORTH reference. $20
- ☐ **And So FORTH** by Huang. A college level text. $25
- ☐ **FORTH Encyclopedia** by Derick & Baker. A complete programmer's manual to fig-FORTH with FORTH-79 references. Flow charted, 2nd Ed. $25
- ☐ **Starting FORTH** by Brodie. Best instructional manual available (soft cover) $16
- ☐ **Starting FORTH** (hard cover) $20
- ☐ **1980 FORML Proc.** $25
- ☐ **1981 FORML Proc.** 2 Vol. $40
- ☐ **1982 FORML Proc.** $25
- ☐ **1981 Rochester FORTH Proc.** $25
- ☐ **1982 Rochester FORTH Proc.** $25
- ☐ **Using FORTH** $25
- ☐ **A FORTH Primer** $25
- ☐ **Threaded Interpretive Languages** $21
- ☐ **AIM FORTH User's Manual** $12
- ☐ **APPLE User's Manual** MicroMotion $20
- ☐ **TRS-80 User's Manual,** MMSFORTH $19
- ☐ **METAFORTH** by Cassady. Mela compiler in 8080 code $30
- ☐ **Systems Guide to fig-FORTH** $25
- ☐ **Caltech FORTH Manual** $12
- ☐ **Invitation to FORTH** $20
- ☐ **PDP-11 FORTH User's Manual** $20
- ☐ **CP/M User's Manual,** MicroMotion $20
- ☐ **FORTH-79 Standard** $15
- ☐ **FORTH-79 Standard Conversion** $10
- ☐ **Tiny Pascal in fig-FORTH** $10
- ☐ **NOVA fig-FORTH** by CCI with editor, assembler, and utilities $15
- ☐ **MVP-FORTH** Source Listings ☐ IBM-PC ☐ CP/M ☐ Apple II/II+ $20

☐ **Installation Manual for fig-FORTH,** contains FORTH model, glossary, memory map and instructions $15

Source Listings of fig-FORTH, for specific CPU's and computers. The Installation Manual is required for implementation. Each $15

☐ 1802	☐ 6502	☐ 6800	☐ AlphaMicro
☐ 8080	☐ 8086/88	☐ 9900	☐ APPLE II
☐ PACE	☐ 6809	☐ NOVA	☐ PDP-11/LSI-11
☐ 68000	☐ Eclipse	☐ VAX	

Ordering Information: Check, Money Order (payable to MOUNTAIN VIEW PRESS, INC.), VISA, MasterCard or COD's accepted. No billing or unpaid PO's. California residents add sales tax. Shipping costs in US included in price. Foreign orders, pay in US funds on US bank, include for handling and shipping by Air: $5 for each item under $25, $10 for each item between $25 and $99 and $20 for each item over $100. Minimum order $10. All prices and products subject to change or withdrawal without notice. Single system and/or single user license agreement required on some products.

DEALER & AUTHOR INQUIRIES INVITED

MOUNTAIN VIEW PRESS, INC.

P O BOX 4656 **MOUNTAIN VIEW, CA 94040** **(415) 961-4103**

Circle 297 on Inquiry card.

www.americanradiohistory.com

LOGO
© MIT © MIT
© MIT $89.95 © MIT
The Best and Most Complete LOGO for Apple II on the market at a Super Saver price.
Sprites now available for LOGO

Krell's College Board
SAT*
Preparation Series
ATARI, APPLE, PET, TRS-80, IBM
A COMPREHENSIVE PREPARATION PACKAGE
MORE THAN 40 PROGRAMS/$299.95
1. Diagnostic analysis
2. Prescription of individual study plans
3. Coverage of all SAT* skills
4. Unlimited drill and practice
5. SAT* Exam Question simulator
6. All questions in SAT* format and at SAT* difficulty level
7. Instantaneous answers, explanations and scoring for problems
8. Worksheet generation and performance monitoring - (optional)
9. A complete record mmanagement system - (optional)
10. Systematic Instruction in pertinent math, verbal and test taking skills - (optional)
Krell's unique logical design provides personalized instruction for each student according to individual needs.

Shelby Lyman
Chess
Shelby's Socrates Chess Tutorial Series uses the latest AI Techniques to customize each lesson for you. Construction modules cover every aspect of the game. For all micro's. Call or write for details.

Amazing Ben
The Royal Road to Artifical Intelligence
$79.95

CONNECTIONS
A complete game system. Learn the principles of scientific reasoning in your choice of game formats Expand minds at all ages. Subject areas include: Geography, Biology, Everyday Objects, etc.
Game System $99.95
Data Base, $24.95 per subject, 3 for $50

Isaac Newton + F.G. Newton
$49.95

Descarte's Delight
$89.95

KRELL SOFTWARE CORP.
The state of the art in educational computing
1320 Stony Brook Road/Stony Brook, NY 11790
Telephone 516-751-5139
Krell Software Corp. has no official ties with the College Entrance Examination Board or the Educational Testing Service. Krell is, however, a supplier of products to the ETS
*Trademarks of Apple Comp. Corp., Tandy Corp. Commodore Corp. Digital Research Corp., I.B.M., Atari Corp.
N.Y.S. residents add sales tax
Prices slightly higher outside U.S.

Listing 7 continued:

```
132:       GOTO 18.8E1
133:     18.7E1 CH$=LEFT$(DUM$,1)
134:     IF (CH$<>".") AND ((CH$<"0") OR (CH$>"9")) THEN \
135:       ERR%=5 : GOSUB 9E1 : ERR%=0 : GOTO 18.3E1
136:     IF CH$="." THEN \
137:       CON.RATE(J%,KEY%)=VAL("0"+DUM$) \
138:     ELSE CON.RATE(J%,KEY%)=VAL(DUM$)
139:       IF (CON.RATE(J%,KEY%)>1.0) OR (CON.RATE(J%,KEY%)<0.0) THEN\
140:         ERR%=2 : GOSUB 9E1 :\
141:         ERR%=0 : GOTO 18.3E1
142:       SW%=-1
143:     18.8E1 WHILE (MID$(CMD$(J%),I%,1)<>" ") AND (I%<LEN(CMD$(J%)))
144:       I%=I%+1
145:       WEND
146:     WEND
147:     CON.KEY%(J%,KEY%+1)=0 : CON.RATE(J%,KEY%+1)=0.0
148:   NEXT J%
149: RETURN
150:
151:
152: 8E1 REM BREAKOUT KEYWORD FROM INPUT STRING AND FIND NUMBER
153: IR%=1
154: WHILE MID$(DUM$,IR%,1)<>" " : IR%=IR%+1 : WEND
155: WORD$=LEFT$(DUM$,IR%-1) + BLANK$
156: WORD$=LEFT$(WORD$,KWO.LEN%)
157: REM BINARY SEARCH FOR WORD IN KEYWORD ARRAY
158: IB%=1 : JB%=VOC.LEN%
159: 8.1E1 KB%=(JB%+IB%)/2
160: IF WORD$>KEYWD$(KB%) THEN \
161:   IB%=KB%+1 \
162:   ELSE JB%=KB%-1
163: IF (WORD$<>KEYWD$(KB%)) AND (IB%<=JB%) THEN 8.1E1
164: IF (WORD$<>KEYWD$(KB%)) THEN \
165:     ERR%=1 : GOSUB 9E1 : ERR%=0 :\
166:   GOTO 18.3E1
167: I%=IR%+I%-1
168: RETURN
169:
170: REM NO FILES
171: 34E1 PRINT "NO LIBRARY FILE NAMED "; LIBNAME$
172: INPUT "PRESS RETURN TO EXIT TO SYSTEM "; LINE ANS$
173: STOP
```

Listing 8: *BIBSR2 is the second of the two portions of the search program. It scans the file of articles, calculating a satisfaction rating for each, summarizes the scan results, and lists those articles that meet your specifications.*

```
1:   REM -------FILE BIBSR2.BAS
2:
3:   REM SEGMENT TWO OF BIBLIOGRAPHY SEARCH PROGRAM
4:   COMMON KEYWD$(1),LIBNAME$,RLEN%,TRUE%,AUTH.LEN%,TITL.LEN%
5:   COMMON MAXBIB%,MAXDESC%,MAXDEF%,MAXKEYS%,MAXCON%,CONCEPT$(1)
6:   COMMON ISS.LEN%,CLS$,ERR%,JOUR.LEN%,KWO.LEN%,CMD$(1)
7:   COMMON LFT%(1),RGHT%(1),CON.KEY%(2),CON.RATE(2),QUERY$,L%
8:   DIM OP.STK$(MAXCON%), V.STK(MAXCON%), ART.KEY%(MAXDESC%)
9:   DIM RPT%(11), ART.VAL(MAXDESC%),V(MAXCON%),RATING%(MAXBIB%)
10:  GOSUB 19E1
11:  CHAIN "BIBLIO"
12:  STOP
13:
14:  REM FUZZY LOGICAL FUNCTIONS
15:  DEF FN.ZADEH(A,B,CH$)
16:  ERR%=0
17:  IF CH$="*" THEN 4E1
18:  IF CH$="+" THEN 4.1E1
19:  IF CH$<>"$" THEN FN.ZADEH=0: ERR%=3 : RETURN
20:  IF B>(1.0-A) THEN FN.ZADEH=B ELSE FN.ZADEH=1.0-A
21:  RETURN
22:  4E1 IF A<B THEN FN.ZADEH=A ELSE FN.ZADEH=B
23:  RETURN
24:  4.1E1 IF A>B THEN FN.ZADEH=A ELSE FN.ZADEH=B
25:  RETURN
26:  FEND
27:
28:  3E1 REM BUILD STRING Y$ FROM QUERY$ BY REPLACING CONCEPT
29:  REM NAMES WITH THEIR VALUES
30:  Y$="" : Y$=LEFT$(QUERY$,LFT%(1)-1)
31:  LFT%(L%+1)=LEN(QUERY$)+1
32:  FOR I%=1 TO L%
33:    V$=STR$(V(I%))
34:    Y$=Y$+V$+MID$(QUERY$,RGHT%(I%),LFT%(I%+1)-RGHT%(I%))
35:    NEXT I%
36:  RETURN
37:
38:  2E1 REM REDUCE Y$ BY PERFORMING FUZZY LOGICAL OP'S
39:  J%=1 : L1%=LEN(Y$)
40:  IF LEFT$(Y$,1)<>"(" THEN RETURN
41:  WHILE MID$(Y$,J%,1)<>")"
42:    J%=J%+1 : WEND
43:  I%=J%
```

Listing 8 continued on page 406

www.americanradiohistory.com

Scientific Applications Performed In:

LIGHTNING SPEED

FORTRAN PROGRAM 1

```
A = 1.52
Do 10 I = 1, 100000
B = A + 1.43

10 Continue
```

Execution time = 6.5 sec.

FORTRAN PROGRAM 2

```
A = 1.52
Do 10 I = 1, 100000
B = A/1.43

10 Continue
```

Execution time = 8 sec.

(WITH BENCH MARKS TO PROVE IT!)

The above bench marks were run on our LDP2 system, which includes: The Lightning One* CPU, LDP72 floppy disk controller, HAZITALL system support and RAM67, 128K Static RAM. The operating system is MS-DOS**. The Fortran Compiler is Microsoft's Fortran, Version 3.01. And, the Lightning One equipped with an 8086 and 8087, runs at 8 MHz.

If your computer, micro or mini, can't offer such high performance, it's time for you to call Lomas Data Products, so you can make your own "lightning speed" calculations. LDP offers a full line of quality S100 bus products: systems, boards & software, all engineered to exacting reliability and performance criteria with a full one year guarantee.

LDP

Dealer and OEM inquiries invited.

New expanded facilities:

LOMAS DATA PRODUCTS, INC. ☐ 66 Hopkinton Road, Westboro, Mass. 01581 ☐ Tel: (617) 366-6434

** Trademark of Lomas Data Products, Inc. ** Trademark of Microsoft, Inc.*

Circle 250 on Inquiry card.

www.americanradiohistory.com

CP/M® Users: Access IBM with ReformaTTer™

ReformaTTer conversion software lets you *read* and *write* IBM 3740 diskettes* on your CP/M or MP/M system.

ReformaTTer is ideal for CP/M users who want

- Access to large system data bases
- Distributed data processing
- Offline program development
- Database conversion

With ReformaTTer, you have the ability to

- Bidirectionally tranfer complete files between CP/M and IBM
- Automatically handle ASCII/EBCDIC code conversion
- Display and alter IBM 3740 directory and data

Enjoy the same advantages of mainframe access that other ReformaTTer users have. Customers like Upjohn, M&M/Mars, The United Nations, Arthur Young & Co., Sandia Labs, FMC Corp., and Stanford University all use ReformaTTer. So can you.

Other versions of ReformaTTer conversion software include

CP/M ↔ DEC (RT 11)
TRSDOS Mod. II ↔ CP/M
TRSDOS Mod. II ↔ DEC (RT 11)

Order ReformaTTer today for only $249.

**IBM 3740 basic data exchange format. ReformaTTer requires one 8" floppy drive.*

(415) 324-9114
TWX: 910-370-7457
467 Hamilton Av., Suite 2, Palo Alto, CA 94301

CP/M is a reg. trademark of Digital Research

Please send complete information on the following versions of ReformaTTer_____

☐ Please send ReformaTTer CP/M ↔ IBM. My check for $249 (plus $5 shipping. Cal. Res. add 6½% sales tax). ☐ Charge to my ☐ VISA ☐ MasterCard.

_____ exp. date _____

Signature _____

Name _____

Company _____

Street _____

City _____

State _____ Zip _____

Mail to MicroTech Exports, Inc.
467 Hamilton Ave., Palo Alto, CA 94301

Listing 8 continued:

```
44:  WHILE MID$(Y$,I%,1)<>"("
45:    I%=I%-1  : WEND
46:  I%=I%+1     '
47:  M%=I%
48:  V.PTR%=MAXCON% : OP.PTR%=MAXCON%
49:  2.2E1 K%=M%
50:  WHILE (ASC(MID$(Y$,K%,1))>=44)
51:    K%=K%+1  :  WEND
52:  V.STK(V.PTR%)=VAL(MID$(Y$,M%,K%-M%))
53:  V.PTR%=V.PTR%-1
54:  IF K%=J% THEN 2.1E1
55:  OP.STK$(OP.PTR%)=MID$(Y$,K%,1)
56:  OP.PTR%=OP.PTR%-1
57:  M%=K%+1
58:  GOTO 2.2E1
59:  2.1E1 WHILE OP.PTR%<MAXCON%
60:    OP.PTR%=OP.PTR%+1 : OP$=OP.STK$(OP.PTR%)
61:    V.PTR%=V.PTR%+1   : V1=V.STK(V.PTR%)
62:    V.PTR%=V.PTR%+1   : V2=V.STK(V.PTR%)
63:    T=FN.ZADEH(V1,V2,OP$)
64:    IF ERR% THEN RETURN
65:    V.STK(V.PTR%)=T  :  V.PTR%=V.PTR%-1
66:    WEND
67:  V.PTR%=V.PTR%+1  :  V1=V.STK(V.PTR%)
68:  IF MID$(Y$,J%+1,1)="'" THEN \
69:    V1=1.0-V1 : \
70:    Y$=LEFT$(Y$,I%-2)+STR$(V1)+RIGHT$(Y$,L1%-J%-1) \
71:    ELSE \
72:    Y$=LEFT$(Y$,I%-2)+STR$(V1)+RIGHT$(Y$,L1%-J%)
73:  GOTO 2E1
74:  RETURN
75:
76:  REM CONVERT TWO ASCII HEX TO INTEGER
77:  DEF FN.TWO.INT%(DUM$)
78:  TEN%=ASC(MID$(DUM$,1,1))
79:  IF TEN%>64 THEN TEN%=TEN%-55 ELSE TEN%=TEN%-48
80:  ONE%=ASC(MID$(DUM$,2,1))
81:  IF ONE%>64 THEN ONE%=ONE%-55 ELSE ONE%=ONE%-48
82:  FN.TWO.INT%=16*TEN%+ ONE%
83:  RETURN
84:  FEND
85:
86:  REM CONVERT ONE ASCII HEX TO REAL
87:  DEF FN.ONEREAL(DUM$)
88:  ONE%=ASC(MID$(DUM$,3,1))
89:  IF ONE%>64 THEN ONE%=ONE%-55 ELSE ONE%=ONE%-48
90:  FN.ONEREAL=ONE%/10.0
91:  RETURN
92:  FEND
93:
94:
95:  19E1 REM READ IN BIBLIO AND CALCULATE SATISFACTION LEVELS
96:  IF END #2 THEN 20.1E1
97:  BIB.LEN%=0 : DESC.BEG%=AUTH.LEN%+TITL.LEN%+JOUR.LEN%+ISS.LEN%+1
98:  OPEN LIBNAME$+".BIB" AS 2 BUFF 16 RECS 128
99:  READ #2; LINE BUFF$
100: WHILE TRUE%
101:   READ #2; LINE BUFF$
102:   BIB.LEN%=BIB.LEN%+1
103:   IF LEFT$(BUFF$,5)="ZZZZZ" THEN \
104:     RATING%(BIB.LEN%)=0 : GOTO 19.5E1
105:   REM DECODE DESCRIPTORS
106:   K%=DESC.BEG% : DESC.NO%=0
107:   WHILE TRUE%
108:     DUM$=MID$(BUFF$,K%,3)
109:     IF DUM$="FFF" THEN 19.1E1
110:     DESC.NO%=DESC.NO%+1
111:     ART.KEY%(DESC.NO%)=FN.TWO.INT%(DUM$)
112:     ART.VAL(DESC.NO%)=FN.ONEREAL(DUM$)
113:     K%=K%+3
114:     WEND
115:
116:   19.1E1 REM DETERMINE ARTICLE VALUE V(J%) FOR EACH CONCEPT
117:   FOR J%=1 TO L%
118:     KEY%=1 : MIN=1.0 : MAX=0.0
119:     WHILE CON.KEY%(J%,KEY%)<>0
120:       REM FIND MATCHING ART.KEY%
121:       RAL=0.0
122:       FOR I%=1 TO DESC.NO%
123:         IF ART.KEY%(I%)=CON.KEY%(J%,KEY%) THEN \
124:           RAL=ART.VAL(I%)
125:         NEXT I%
126:       IF RAL<CON.RATE(J%,KEY%) THEN MIN=RAL ELSE \
127:         MIN=CON.RATE(J%,KEY%)
128:       IF MIN>MAX THEN MAX=MIN
129:       KEY%=KEY%+1
130:       WEND
131:     V(J%)=MAX
132:     NEXT J%
133:   GOSUB 3E1
134:   GOSUB 2E1
135:   IF ERR% THEN 22E1
136:   RATING%(BIB.LEN%)=10*VAL(Y$)
137:   19.5E1 WEND
138: 20.1E1 CLOSE 2
139:
140: 21E1 REM SEARCH OVER RATINGS TO COMPUTE #ARTICLES VS RATINGS
```

Listing 8 continued on page 410

www.americanradiohistory.com

APL★PLUS® is Here!

***The world's most powerful* programming language is now available for your IBM® Personal Computer.**

If your code is longer than

`N[CS⍋N;]` —To sort a list of names N according to collating sequence CS

`(I+1)⊥C` —To calculate the final balance on a cash-flow stream C at varying interest rates I

`M⌹N` —To multiply matrix M by the inverse of matrix N

`M×M` —To multiply M by itself

`((⍳⍴A)=A⍳A)/A` —To remove any duplicates from a list of data

`99+25?900` —To generate 25 different random numbers between 100 and 999

then you are

- reinventing the wheel
- playing head games with BASIC or PASCAL, or
- unaware of APL.

Don't take our word for it—ask someone who *knows* the APL language. It's powerful, and our APL*PLUS micro versions available for the IBM PC and the TRS-80® Model III support the full range of features you'd expect for your microcomputer. APL is easy to learn—easier than BASIC for the same function. The documentation that comes with the APL*PLUS/PC System includes *APL is Easy!*, along with the most popular APL self-teaching text, *APL: An Interactive Approach* by Gilman and Rose, and a detailed reference manual.

STSC, a Contel Company, has been an international leader in APL computer services since 1969. The same system that is used to solve problems for the largest industrial and financial organizations in the world is now available for your PC. Everything you need to become an expert in this system is available today. Act now.

APL*PLUS/PC minimum system configuration: The APL*PLUS/PC System operates under the PCDOS operating system on IBM's Personal Computer with at least 128K of RAM memory and at least one disk drive. It automatically supports the Intel® 8087 Floating Point Coprocessor if installed.

stsc

APL*PLUS/PC System Distribution
STSC, Inc., 2115 East Jefferson Street
Rockville, Maryland 20852 (301) 984-5000 (credit card orders only)

Please send the APL*PLUS/PC System, including documentation and a custom character ROM which enables the PC to display the APL character set.

☐ Enclosed is my check for $595. Add applicable state and local sales tax in CA, CO, CT, IL, MA, MD, MI, NC, NM, NY, PA, TX, WA.

☐ Charge my MasterCard Account # _____
Bank # _____ Expiration date _____

☐ Charge my VISA Account # _____
Expiration date _____
Credit card customers add $4.00 shipping and handling in the continental U.S.

☐ Send me your free information package.

Name _____

Address _____

_____

City _____ State _____ Zip _____

Phone (_____) _____

BY-383

APL*PLUS is a service mark and trademark of STSC, Inc., registered in the U.S. Patent and Trademark Office and in certain other countries. IBM is a trademark of International Business Machines. Intel is a trademark of Intel Corporation. TRS-80 is a registered trademark of Tandy Corporation.

www.americanradiohistory.com

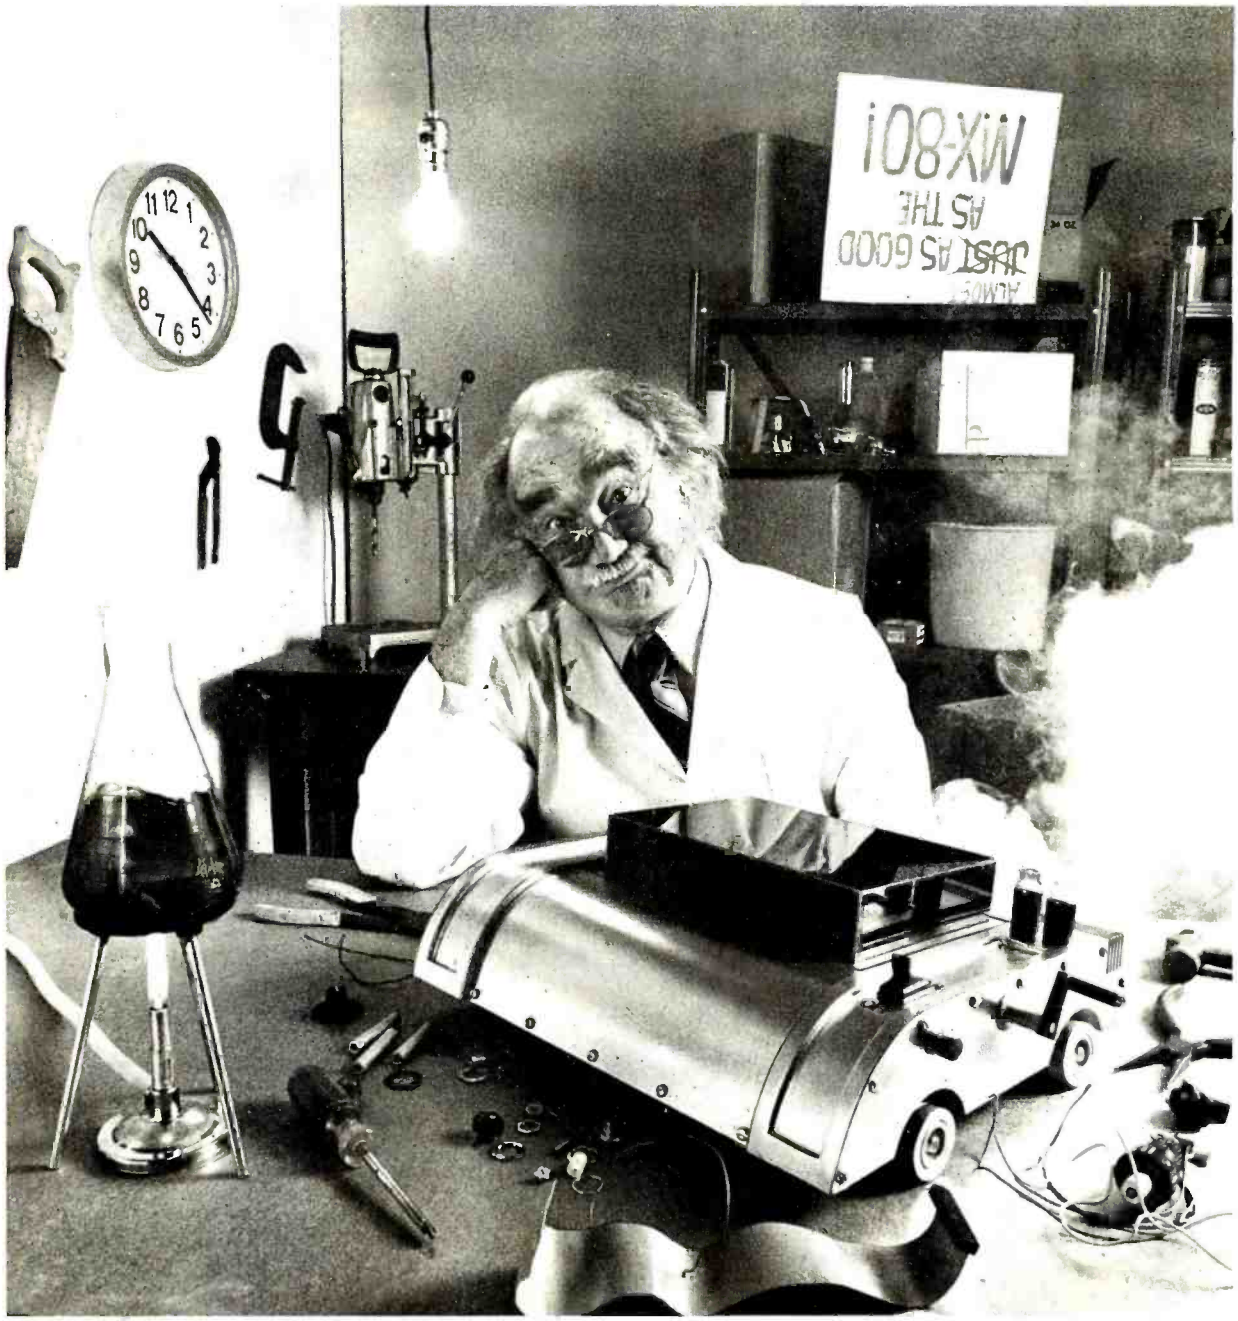

For everyone who's tried
to top the MX-80, bad news.
We just did.

Epson.

www.americanradiohistory.com

The Epson MX-80 is the best-selling dot matrix impact printer in the world. It has been since its introduction. And despite the host of imitators it spawned, no one has been able top it. Until now.

FX-80: Son of a legend.

The new Epson FX-80 is far more than just doo-dads added on to last year's model. It's the most astonishing collection of features ever assembled in a personal printer.

For starters, it's fast: 160 CPS. And clean. All the print quality Epson is famous for in a tack-sharp 9x9 matrix.

But that hardly scratches the surface.

Create your own alphabet.

With the new FX-80, you aren't limited to ASCII characters. You can create your own. Any character or symbol that can be defined in a 9x11 matrix can be added to the FX-80's already impressive library of type styles and stored in its integral 2K RAM.

So you can create "Sally's Gothic" or "Tom's Roman" just by downloading and modifying standard characters. Or you can create a custom set from scratch. Either way, you can store up to 256 new characters. And if you don't need a new alphabet, the RAM functions as a 2K data input buffer.

Who knows graphics better than Epson?

Nobody, that's who. And if you don't believe it, witness the FX-80.

With a 12K ROM capacity, the FX-80 gives you a few things the others don't. For example, not one, not two, but *seven* different dot addressable graphic modes are program selectable. And can be mixed in the same print line. Everything from 72 DPI (dots-per-inch) Plotter Graphics to the 640 dots per line resolution designed to match the remarkable monitor clarity of the Epson QX-10 personal computer.

And *that* is in addition to an astonishing array of 136 different user-selectable type styles including Proportional, Elite and Italic as well as the more conventional faces you get on other printers.

Hard-to-beat hardware.

The FX-80 has all the hardware features you've come to know and love on the MX Series: logic seeking, bidirectional printing, the by-now-famous disposable printhead, and more.

The FX-80 features an adjustable pin platen or optional friction/tractor feed, so you can use fanfold, roll or sheet paper ... backwards or forwards. The FX-80 even gives you reverse paper feed.

And if you're printing forms, the FX-80 has a feature you're gonna love: a function that allows you to tear off the paper within one inch of the last print position.

Be the first on your block.

We'd be willing to bet that the FX-80 — like the MX-80 — will have its share of imitators. Don't be fooled. To make sure you get the genuine article, rush down to your local computer store right now and let them show you everything the FX-80 can do.

And while you're there ... ask them to show you how it works with our computers.

EPSON

EPSON AMERICA, INC.

COMPUTER PRODUCTS DIVISION

3415 Kashiwa Street
Torrance, California 90505
(213) 539-9140.
Outside California, phone
(800) 421-5426 for the
Epson dealer nearest you.

Circle 178 on inquiry card.

www.americanradiohistory.com

Circle 427 on inquiry card.

AVAILABLE NOW!

UCSD p-SYSTEM*

(VERSION IV.1)

FOR THE

VICTOR 9000*

THE MOST PORTABLE, POWERFUL AND POPULAR OPERATING ENVIRONMENT IS NOW AVAILABLE FOR IMMEDIATE SHIPMENT FOR THE VICTOR 9000 / SIRIUS COMPUTER

- ☐ Full screen editor
- ☐ Comprehensive filer and utilities
- ☐ PASCAL, FORTRAN and BASIC compilers
- ☐ Object code compatibility with IBM, Osborne, TI, DEC
- ☐ Extended memory
- ☐ TURTLEGRAPHICS Full use of Victor screen
- ☐ Native code generator Complete trade off between size and speed
- ☐ Xenofile p-SYSTEM to/from CP/M 86 TM-Digital Research Corp.
- ☐ Complete documentation 700 pages
- ☐ Runtime only systems also available

*Trademarks
Regents of the University of California
Victor Business Products

Combine a great machine with a great operating system

ONLY FROM TDI:

620 HUNGERFORD DRIVE,
SUITE 33,
ROCKVILLE, MD. 20850
(301) 340-8700

29 ALMA VALE ROAD
BRISTOL, U.K. BS8 2HL
0272-742796

Listing 8 continued:

```
141: FOR I%=1 TO 11 : RPT%(I%)=0 : NEXT I%
142: FOR I%=1 TO BIB.LEN%
143:   K%=RATING%(I%) + 1
144:   RPT%(K%)=RPT%(K%)+1
145:   NEXT I%
146: FOR I%= 10 TO 1 STEP -1
147:   RPT%(I%)=RPT%(I%) + RPT%(I%+1)
148:   NEXT I%
149: 21.3E1 PRINT CLS$
150: PRINT TAB(11); "NUMBER OF ARTICLES THAT MEET OR EXCEED RATINGS OF"
151: PRINT TAB(28); "0.0.....1.0"
152: PRINT
153: PRINT TAB(11);"RATINGS";TAB(22);"#ARTICLES";
154: PRINT TAB(39); "RATINGS";TAB(50);"#ARTICLES"
155: PRINT
156: FOR I%=1 TO 6
157:   FOR K%=0 TO 1
158:     IND%=I%+6*K%
159:     IF IND%>11 THEN 21.9E1
160:     PRINT USING "#.#";TAB(13+28*K%); (IND%-1)/10.0;
161:     PRINT USING "###"; TAB(24+28*K%); RPT%(IND%);
162:     NEXT K%
163:   21.9E1 PRINT
164:   NEXT I%
165: PRINT
166:
167: REM FIND AND LIST ARTICLES THAT MEET MINIMUM THRESHOLD
168: INPUT "ENTER MINIMUM RATING DESIRED FOR ARTICLE PRINTOUT: ";MINRAT
169: GOSUB 24E1
170: OPEN LIBNAME$+".BIB" RECL RLEN% AS 2
171: I%=0
172: IF END #2 THEN 21.2E1
173: WHILE I%<BIB.LEN%
174: I%=I%+1
175:   IF RATING%(I%) < INT%(10.0*MINRAT) THEN 21.1E1
176:   READ #2,I%+1; LINE BUFF$
177:   GOSUB 25E1
178:   21.1E1 WEND
179: 21.2E1 CLOSE 2
180:
181: CONSOLE
182: INPUT "DO YOU WISH TO RE-SEARCH WITH DIFFERENT THRESHOLD(Y/N) ";ANS$
183: IF UCASE$(LEFT$(ANS$,1))="Y" THEN 21.3E1
184: FOR I%=1 TO MAXCON% : OP.STK$(I%)="" : NEXT I%
185: RETURN
186:
187: 22E1 PRINT "INVALID FUZZY OPERATOR IN INTERROGATION PHRASE"
188: INPUT "PRESS RETURN TO RESTART SEARCH ROUTINE "; LINE ANS$
189: CHAIN "BIBSRCH"
190:
191: 24E1 REM PRINT OUTPUT HEADER INFO
192: INPUT "DO YOU WISH A PRINTED OUTPUT (Y/N)? "; PRNT$
193: IN%=1 : LLEN%=63
194: IF UCASE$(LEFT$(PRNT$,1))="Y" THEN \
195:   LPRINTER : IN%=6 : LLEN%=79 :\
196:   FOR IP%=1 TO 5 : PRINT : NEXT IP%
197: PRINT TAB(21); "Fuzzy Search of Library "; LIBNAME$
198: PRINT TAB(IN%);
199: FOR IP%=1 TO 63 : PRINT "-"; : NEXT IP% : PRINT
200: PRINT TAB(IN%); "Interrogation Phrase :"
201: PRINT TAB(IN%+3); QUERY$
202: PRINT TAB(IN%); "Interrogation Phrase Definitions :"
203: FOR IP%=1 TO L%
204:   PRINT TAB(IN%+3); CONCEPT$(IP%); " : ";
205:   PRINT CMD$(IP%)
206:   NEXT IP%
207: PRINT TAB(IN%); "Selection Level : ";
208: PRINT USING "#.#"; MINRAT
209: PRINT TAB(IN%);
210: FOR IP%=1 TO 63 : PRINT "-"; : NEXT IP% : PRINT
211: LCNT%=L%+13
212: RETURN
213:
214: 25E1 REM PRINT ARTICLE DATA
215: SP%=IN%+5
216: IF JOUR.LEN%>ISS.LEN% THEN SP%=SP%+JOUR.LEN% \
217:   ELSE SP%=SP%+ISS.LEN%
218: IF LCNT%>57 THEN \
219:   FOR IP%=1 TO 71-LCNT% : PRINT : NEXT IP% :LCNT%=LCNT%+5
220: PRINT TAB(IN%);"Record : ";
221: PRINT USING "####"; I%;
222: IF (SP%+11)>LLEN% THEN PRINT TAB(IN%); : LCNT%=LCNT%+1 :\
223:   ELSE PRINT TAB(SP%);
224: PRINT "Level : ";
225: PRINT USING "#.#"; RATING%(I%)/10.0
226: PRINT TAB(IN%); MID$(BUFF$,AUTH.LEN%+TITL.LEN%+1,JOUR.LEN%);
227: IF (SP%+TITL.LEN%)>LLEN% THEN PRINT TAB(IN%); : LCNT%=LCNT%+1 :\
228:   ELSE PRINT TAB(SP%);
229: PRINT MID$(BUFF$,AUTH.LEN%+1,TITL.LEN%)
230: PRINT TAB(IN%);MID$(BUFF$,AUTH.LEN%+TITL.LEN%+JOUR.LEN%+1,ISS.LEN%);
231: IF (SP%+AUTH.LEN%)>LLEN% THEN PRINT TAB(IN%); : LCNT%=LCNT%+1 :\
232:   ELSE PRINT TAB(SP%);
233: PRINT LEFT$(BUFF$,AUTH.LEN%)
234: PRINT
235: LCNT%=LCNT%+4
236: RETURN
```

Additional listing on page 412

www.americanradiohistory.com

We speak your language and translate your software needs into efficient and Quality Services...

DMA products operate on the full range of 8080-8088 processors, including the IBM-PC

Here's what you can do!

Data Base Management

The FORMULA.
The Application Generator™

This unique software package lets you create sophisticated business application software without programming. The FORMULA builds files, reports, updates, sorts, and menus and links them all according to the user's specifications. It incorporates features of a data base manager, a word processor, and a compiler into the first "system language" for microcomputers.

Communications

ASCOM™

ASCOM™ is the most versatile asynchronous communication package for microcomputers on the market. It features interactive, menu-driven, and batch operations; supports auto-answer and auto-dial modems; includes most popular protocols; provides network simulation; and many other options. Xerox Corporation, NCR, Monroe Systems for Business, and the big 8 accounting firms use ASCOM.

Utilities

EM80/86™

This software emulator lets you use eight bit software on sixteen bit microcomputers without hardware modifications.

UT-86™

This package of user-friendly utilities for the IBM Personal Computer and similar systems includes copying, directory sorting, patching, and a general purpose file print utility.

Coming Soon

DMA."C"™ — A "C" language compiler which will generate either Z80 or 8086 assembly language code. Due to a unique optimization routine which is based upon a functional "P-code" model, the efficiency of DMA."C" will far exceed that of existing compilers.

SYNC/COM™ — A bisynchronous communication package that will be configurable for a variety of systems and include a flexible interface to the operating system.

The 8086 O. S. Converter™ — A program which will permit programs written for Digital Research's CP/M-86™ to execute under IBM's PC DOS.

DMA DMA DMA

WE SPEAK YOUR LANGUAGE WE SPEAK YOUR LANGUAGE WE SPEAK YOUR LANGUAGE

DYNAMIC MICROPROCESSOR ASSOCIATES, INC.
545 FIFTH AVENUE, NY, NY 10017
Dealer Inquiries only • (212) 687-7115

www.americanradiohistory.com

Circle 216 on inquiry card.

Main/Frames

Main/Frames
from
$200

- 30 Models of Enclosures
- Assembled and tested
- Quasi-Coax Motherboards
- Power Supply
- Card cage and guides
- Fan, line, cord, fuse, power & reset switches

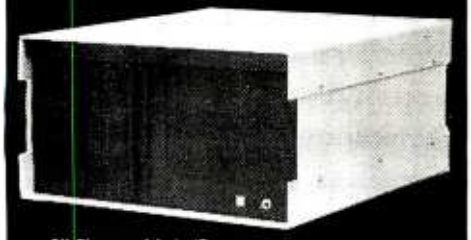

8" Floppy Main/Frame
$482

8" Disc Enclosure
$250

$525
Phase/80 8" Floppy Mainframe

$900
Phase/80 Desk + Mainframe

Write or call for our brochure which includes our application note: "Building Computers — A Recipe"

INTEGRAND

8620 Roosevelt Ave.•Visalia,CA 93291
209/651-1203
We accept BankAmericard/Visa and MasterCharge

Listing 9: *A copy of the first screen displayed by PARMS during the definition of parameters for a new library called COMPJOUR. Entries made by the user are underlined.*

```
----PARAMETER DEFINITION FOR COMPJOUR----

THIS MODULE WILL DEFINE THE PARAMETERS FOR THE LIBRARY COMPJOUR
IF YOU DO NOT WISH TO PROCEED ENTER S ELSE ENTER C  C

** FIRST WE DEFINE THE ARTICLE RECORD FIELD SIZES **
YOU HAVE A MAXIMUM OF 250 CHARACTERS THAT MAY BE ALLOCATED
FOR EACH ARTICLE RECORD.  EACH KEYWORD DESCRIPTOR ATTACHED
WILL CONSUME THREE OF THESE.
WHAT IS THE MAXIMUM NUMBER OF DESCRIPTORS PER ARTICLE?  8

YOU HAVE 226 CHARACTERS REMAINING.
ENTER MAXIMUM FIELD LENGTHS, IN ORDER, FOR AUTHOR, TITLE,
JOURNAL, AND ISSUE---ALL ON ONE LINE.  SEPARATE ENTRIES BY
ONE OR MORE SPACES AND FOLLOW LAST ENTRY WITH RETURN.
>  17 50 16 16
```

Listing 10: *A copy of the second screen displayed by PARMS, which completes the parameter definitions for COMPJOUR.*

```
** NOW WE SET THE MAXIMUM SIZES OF OTHER PARAMETERS **
ENTER, IN ORDER, THE MAX TO BE ALLOWED FOR :
CHARS PER KEYWORD, NO. OF KEYWORDS IN VOCABULARY (<256)
NO. CONCEPTS PER INTERROGATION, NO. KEYWORDS PER CONCEPT.
SEPARATE ENTRIES BY SPACES AND FOLLOW LAST WITH RETURN.
>  16 150 8 8

CAPACITY OF ONE SIDE OF ONE DISK (KILOBYTES):  206

YOU HAVE DISK SPACE FOR    1552 ARTICLES.
YOU HAVE MEMORY SPACE FOR   13823 ARTICLES.
  1552 ARTICLES IS THE MAXIMUM YOU MAY HAVE.
DO YOU WISH TO RE-ALLOCATE THE AVAILABLE SPACE (Y/N)?  N

MAXIMUM NO. OF ARTICLES DESIRED:  1500
```

Listing 11: *The menu of system functions is redisplayed after a selected function has been completed. The second step in building a library is to select menu item 2 to build/modify the keyword vocabulary.*

```
----------BIBLIOGRAPHY SEARCH----------

1    BUILD/MODIFY BIBLIOGRAPHY
2    BUILD/MODIFY KEYWORD VOCABULARY
3    LIST KEYWORD VOCABULARY WORDS
4    SEARCH BIBLIOGRAPHY FILE
5    COMPRESS BIBLIOGRAPHY FILE
6    DONE--EXIT TO SYSTEM

PLEASE SELECT DESIRED FUNCTION BY NUMBER:  2
```

Listing 12: *The screen display as you add three new keywords to the vocabulary. You signal the end of the sequence of entries by pressing the return key in response to the prompt for another keyword.*

```
-------KEYWORD VOCABULARY BUILD/MODIFY -------

DO YOU WISH TO ADD OR DELETE (A/D)?  A

ENTER KEYWORD # 110  :  FUZZY SET

ENTER KEYWORD # 111  :  CODE

ENTER KEYWORD # 112  :  BALLY

ENTER KEYWORD # 113  :

SORTING....
 112 KEYWORDS WRITTEN TO VOCABULARY
MODIFYING KEYWORD DESCRIPTORS TO REFLECT....
```

Additional listing on page 414

www.americanradiohistory.com

Oryx software

QUALITY DISCOUNTS

for a complete selection of microcomputer hardware, software and accessories.

Apple/Franklin

Hayes SmartModem, Dow Jones Analyzer Reg. 629 NOW $499

BRODERBUND
- Apple Panic . . . . . $ 25
- Choplifter 26
- Serpentine 26

CONTINENTAL SOFTWARE
- Home Accountant . . . $129

CHARLES MANN
- Basic Teacher . . . . . $ 30
- Teacher Plus 32
- Medical II 879

CDEX
- *Visicalc Training . . . . $ 39

DENVER SOFTWARE
- *Easy (Exec. Att'g) $565
- Financial Partner 219
- Pascal Tutor or Programmer 108

HOWARD SOFTWARE
- Real Estate Analyzer . . $145
- Tax Preparer '83 175
- Tax Preparer state: CA. NY. NJ. IL . . . . $Call

KRELL CO.
- Logo $135

LINK SYSTEMS
- Datafax $159
- Datalink 79

MICROPRO
- Wordstar (Reg. CP/M) . $299
- Mailmerge 149
- CalcStar 99
- SpellStar 149
- SuperSort 159
- Data Pak (Special) . . . 480

MICROSOFT
- Basic Compiler $315
- Cobol-80 599
- Fortran-80 155
- Time Manager 125
- TASC Compiler 135
- A.L.D.S. 99
- Multiplan (DOS) 199

PENGUIN SOFTWARE
- Complete Graphics System . . . . . $ 57
- Graphics Magician . . . 48

OMEGA
- Locksmith . . . . . $ 79
- Inspector 47
- Watson 44

GAMES
- Hayden Sargon II . . . . $ 25
- Infocom Zork I, II or III . 32
- Infocom Deadline . . . 42
- L&S Crossword Magic 38
- Sirtech Wizardry 39
- Sirtech Night of Diamonds 29

MISC.
- ISM Mathemagic . . . . $ 80
- ISA Spellguard 199
- LJK Edit 6502 82
- On-Line Screen Writer II 95
- PFS: Filing, Report or Graph 88

PEACHTREE
- Series 40 G/L, A/R, A/P ea. . . . $399
- Inventory 399
- G/L + A/R + A/P (Special) 397
- Series 9 Peachcalc 279
- Telecommunications . 279

SILICON VALLEY
- Wordhandler (Special) . $149
- Sensible Speller 99

CP/M

COMPUVIEW
- V-Edit 8080 Z80, IBM PC $130
- V-Edit CP/M86, MS DOS 165

DIGITAL RESEARCH
- Pascal MT + ... $389
- MAC 85
- SID (8080 Debugger) . . 65
- ZSID (Z80 Debugger) . . 90
- CP/M 2.2 149
- C Basic 2 97
- PL/1-80 449

FOX AND GELLER
- Quick Screen $125
- Quick Code 237
- D-Util 89

MARK OF UNICORN
- *Final Word $250

MICROPRO
- *WordStar (Special) . . . $299
- *MailMerge 149
- *CalcStar 99
- *SpellStar 149
- *SuperSort I 159
- *InfoStar 299
- 3-Pack 480

MICROSOFT
- Basic 80 . . . . . $279
- Basic Compiler 289
- Fortran 80 345
- Cobol 80 550
- Macro 80 140
- MuMath/MuSimp 199
- Multiplan 215

OASIS
- *The Word Plus $120
- *Punctuation and Style . 99

PEACHTREE
- General Ledger Series 4 $399
- Accounts Receivable Series 4 399
- Accounts Payable Series 4 399
- Inventory Series 4 . . . 399
- CPA Client Write-up . . 799
- Series 8 Modules each 485
- *Peackpak 4 (G/L, A/R, AP)(Sp) 397
- Peachtext 350

PRO/TEM SOFTWARE
- *Footnote $105

STAR COMPUTER SYSTEM
- G/L, A/R, A/P or Pay . . $350
- Legal Time. Billing . . . 845
- Property Management . 845

SORCIM
- Supercalc $225
- Trans 86 115
- Act 155

SUPERSOFT
- Diagnostic II . . . . . $ 83
- Disk Doctor 84
- Fortran 299
- C-8086 400
- Lisp 120
- Tiny Pascal 63
- Z8000 Assembler 400
- C Cross Assembler . . 400
- Fortran 8086 340
- *ScratchPad 219
- *Optimizer 159
- *Disk Edit 80

ASHTON-TATE
- *dBase II $450

GAMES
- Infocom Zork I, II or III . $ 32
- Deadline 50
- Yahoo Catchum 32
- Supersoft Nemesis . . 37
- Supersoft Dungeon Master 34
- Supersoft Analyza II . . 39

IBM PC

Please see CP/M listing for products with a "". All programs with a "*" will run on PCDOS.*

- IUS EasiWriter I $299
- IUS EasiSpeller 149
- IUS Accounting Module 460
- Alpha DataBase Manager 170
- Alpha Mailing List . . . 85
- Data Most Write-on . . 110
- Woolf Move It 125
- ISA Spellguard 247
- Lifetree Volkswriter . . 175
- Special Peachpak (GL, AR & AP) 399
- Ecosoft Microstat . . . 257
- Northwest Statpak . . . 397
- Howard Software Tax Preparer '83 195
- Organic Software Milestone $269
- Datebook I 269
- *Microstuf Crosstalk . . $139

GAMES
- Lost Colony . . . . . $ 25
- Temple of Apshai 33
- Galaxy 22
- Midway Campaign . . . 20
- Frogger 30
- The Warp Factor 35

Accessories/ Hardware

BOARDS

Apple/Franklin
- CoProcessors 88 card . $795
- Softcard (Z80 CP/M) . . 245
- Applescope (your Apple as an Oscilloscope) . 595
- Videx 80 Col. Board . . 247
- Microsoft Premium Pak 599
- Videx Enhancer I 149
- K&D Enhancer 115
- Dan Paymar Lower Case 27
- ALS Smarterm 379
- ALS Z-card 269
- Versacard 160
- Bit 3 Dual Comm-plus . 209
- 16K RAM WIZARD . . . 79
- Microsoft 16K RAM . . 89
- Echo II Speech Synthesizer 159

IBM PC
- BYAD DS-1 (64K, Z80, CP/M) . . . $599
- Datamac 64K 399
- Zedex Baby Blue 495
- Quadram Quad Board . 445
- Quadram 128K Ram . . 495
- AST Combo + 64K w/Par. Port 350
- Hercules Graphics Board 555
- Orchid Monochrome Grahic Adptr. 432
- QuCeS Big Blue 499
- Vista Maxicard 64K . . 325

MISCELLANEOUS
- Percom Doubler II . . . $167
- Symtec Light Pen (IBM PC) 140
- Symtec Light Pen (APII/IIi) 200
- Microfazer BK Printer Buffer 135
- Maynard Floppy Drive Controller w/Par. Port (ICMPC) 229

COMPUTERS Commodore/Atari Nec/Xerox — Call for Price Information

MONITORS & TERMINALS
- Amdek Video 300 . . . . $160
- Amdek RGB Color . . . 699
- NEC 12" Hires Green . 159
- Sanyo 12" Hires Green 199
- USI Hi-RLS 12" Amber . 199
- Zenith ZVM 12" Green . 115
- PGS RGB Color 599

MODEMS
- Novation Apple-Cat II . $299
- Novation 212 Auto Cat 585
- Hayes Smart modem . . 225
- Hayes Smart Modem 1200 520
- Micromodem II 319
- Hayes Chronograph . . 199
- US Robotics: Auto-Dial (Full Auto300/1200) 459
- Auto-Line (Auto Answer300/1000) . . 399

PRINTERS
- Epson . . . . . $Call
- C. Itoh Starwriter 1450
- C. Itoh Prowriter 499
- Generic Prowriter . . . 425
- NEC 3530 1890
- NEC 8123A 525
- Okidata Microline 82A . 460
- Okidata Microline 83A . 685
- Prism 80 (w/4 options) color 1399
- Prism 132 (w/4 options) 1547
- Smith-Corona TP-1 . . . 625

DISK DRIVES
- Rana Elite I (AP II) (Special) $325
- Rana Elite II . . . . . $Call
- Rana Elite III . . . . . $Call
- Rana Controller (AP II) . 90
- Micro Sci A35 (AP II) . . 399
- Tandon 100-2 274

. . . ***and many more!***

ORDER TOLL FREE - Outside WI - 1-800-826-1589

Please:
- Wisconsin residents — add 5% for sales tax
- Add $3.50 for shipping per software and small items. Call regarding others.
- Foreign - add 15% handling & shipping for small items & software.

We welcome:
- Visa, Mastercharge — (Add 4%)
- Checks (Allow 1-2 weeks for clearing)
- COD (Add $1.50 per shipment)

For technical information & in Wisconsin: 715-848-2322
Store prices differ from mail order.

Oryx Software • 205 Scott St. • P.O. Box 1961 • Wausau, WI 54401

Circle 327 on Inquiry card.

www.americanradiohistory.com

Listing 13: *After any modifications to the keyword vocabulary, a listing of the complete vocabulary appears on either the display or the printer. The printed output is in four columns; the display output would be in three columns.*

```
                    COMPJOUR KEYWORD VOCABULARY
                    ---------------------------

  1 A-I              29 CP/M2.2          57 INTERPRETER      85 QUEUE
  2 ACCOUNTING       30 CRT              58 INVENTORY        86 RANDOM
  3 ALGORITHM        31 DATA             59 LANGUAGE         87 RECORDER
  4 ANALOG           32 DEBUG            60 LAPLACE          88 REGRESSION
  5 ANALYSIS         33 DECIMAL          61 LINEAR           89 REVIEW
  6 AP'L             34 DECISIONS        62 LINKED-LIST      90 SCHEDULING
  7 APPLICATIONS     35 DESIGN           63 LISTING          91 SEARCH
  8 ASSEMBLER        36 DIFFERENTIAL     64 LISTS            92 SERIAL
  9 ASSEMBLY         37 DIGITAL          65 LOGIC            93 SET
 10 ASTRONAUTICS     38 DISASSEMBLER     66 MAILING          94 SIMULATION
 11 BALLY            39 DISK             67 MANAGEMENT       95 SORT
 12 BASIC            40 DRIVER           68 MATHEMATICS      96 SPACE
 13 BOOLEAN          41 DUMP             69 MATRIX           97 STATISTICS
 14 BUDGET           42 EBASIC           70 MCOS             98 STRING
 15 BUSBASIC         43 EDITOR           71 MERGE            99 STRUCTURED
 16 BUSINESS         44 FILE             72 MODEM           100 STRUCTURED
 17 CBASIC           45 FINANCIAL        73 MOTION          101 TERMINAL
 18 CIRCUITS         46 FORMATTER        74 MSBASIC         102 TEST
 19 CODE             47 FOURIER          75 NSBASIC         103 THEORY
 20 COMMUNICATIONS   48 FUZZY-SET        76 PARALLEL        104 THREE-DIMENSIONS
 21 COMPILER         49 GAME             77 PASCAL          105 TRANSCENDENTAL
 22 COMPRESSION      50 GRAPHICS         78 PERSONAL        106 TRANSLATOR
 23 CONSTRUCTION     51 HARDWARE         79 PERSPECTIVE     107 TREES
 24 CONTROL          52 HASHING          80 PHYSICS         108 TRS-80
 25 CONVERSION       53 HEXADECIMAL      81 PLOTTER         109 TUTORIAL
 26 COPY             54 INPUT/OUTPUT     82 PRINTER         110 UTILITY
 27 CORRELATION      55 INTEGRATION      83 PROGRAM         111 WARNIER-ORR
 28 CP/M             56 INTERFACE        84 PSEUDORANDOM    112 Z-80
```


2000 letters per hour via your personal computer

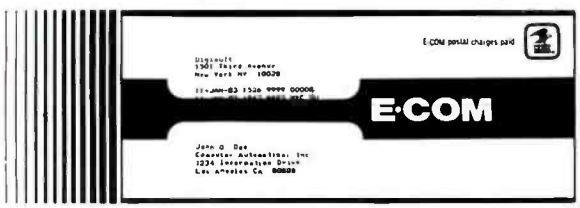

delivered in 48 hours or sooner at 26¢ a piece.

Whether it's credit and collection applications, announcements to your customers, or sales promotions for new services, our MAIL-COM software turns your personal computer into a one-button mailing house of enormous power. All you need is a modem, a personal computer, and our MAIL-COM software.

Our software allows you to link up with the U.S. Postal Service's new ECOM System. After receiving your letters via modem, the Postal Service will then print, stuff, seal and deliver the letters usually by the next day and guaranteed within 48 hours.

MAIL-COM software is available now for the IBM PC ($195.00) and for the Alpha Micro ($495.00). Next month MAIL-COM software will be available for CP-M ($195.00) and for the Apple ($195.00).

To order, call or write:

Digisoft Computers
1501 Third Avenue
New York, NY 10028
(212) 734-3875

BREAKTHROUGH

NEW

IMMEDIATE DELIVERY

INCOMM AUTO DIAL 300/1200
(212A) MODEM FOR $599.00
INTRODUCTORY GET ACQUAINTED PRICE!
(For A Limited Time Only!)
FOR A AUTOMATIC DIALING
300/1200 BAUD MODEM $495.00
(Limit Two Per Customer) *Compatible with Hayes
YOU DO NOT NEED A TELEPHONE

"To originate or to receive a call" Simply hook up the modular jack (RJ11C) directly to the phone line, then type the phone number in your terminal or Microcomputer and the **INCOMM Auto Dial 212A Modem** will automatically dial the number and make the connection. It will then remember the number and will redial by a simple command. The reliability of all **INCOMM** products is so high that we back our products with a full **TWO YEAR WARRANTY!**

DEALER INQUIRIES INVITED!
(Some selected territories are still available)

CALL COLLECT TO ORDER DESK ONLY (312) 459-8874
(Bank Cards Accepted)

115 N. Wolf Road **INCOMM** Wheeling, IL 60090
(312) 459-8881

Circle 341 on Inquiry card.

Circle 208 on Inquiry card.

www.americanradiohistory.com

Listing 14: *The screen display as an article is being added to the bibliography (using menu function 1).*

```
----------BIBLIO BUILD/MODIFY----------

DO YOU WISH TO ADD OR DELETE ARTICLES (A/D)? A

PRESSING RETURN IN RESPONSE TO THE PROMPT 'AUTHOR'
TERMINATES THIS ROUTINE.

AUTHOR :  Watson, S.

TITLE :  Fuzzy Decision Analysis

JOURNAL :  IEEE Trans SMC-9

ISSUE :  Jan 79 p1

ENTER KEYWORDS AND RATINGS, I.E., KEYWORD1 0.5 KEYWORD2 0.6
 FUZZY-SET 1.0 DECISIONS 0.8 ANALYSIS 0.8 APPLICATIONS 0.6

AUTHOR :

 62  ARTICLES ON FILE
PRESS RETURN TO GO BACK TO MENU
```

Listing 15: *The display after selecting menu item 4 to search the bibliography file. After entering the interrogation phrase, you must define each concept in the phrase in terms of keywords that are contained in the relevant vocabulary.*

```
--------BIBLIOGRAPHY SEARCH--------

ENTER INTERROGATION PHRASE
 (GRAPHICS*PLOTTER*(PROGRAM*BASIC))

PLEASE DEFINE EACH OF THE CONCEPTS YOU HAVE ENTERED
IN TERMS OF KEYWORDS AND THEIR APPLICABILITY
EXAMPLE : THEORY 0.6 APPLICATIONS 0.8

GRAPHICS:  GRAPHICS 1.0

PLOTTER:  PLOTTER 0.9 PRINTER 0.4

PROGRAM:  PROGRAM 1.0 LISTING 1.0

BASIC:  BASIC 1.0
```

Listing 16: *After the search of the article file is completed, a summary of the results is displayed, and you enter the minimum rating for articles to be listed.*

```
        NUMBER OF ARTICLES THAT MEET OR EXCEED RATINGS OF
                        0.0.....1.0

RATINGS     #ARTICLES        RATINGS     #ARTICLES

  0.0          62              0.6          1
  0.1           2              0.7          1
  0.2           2              0.8          1
  0.3           2              0.9          0
  0.4           2              1.0          0
  0.5           1

ENTER MINIMUM RATING DESIRED FOR ARTICLE PRINTOUT:  0.2

DO YOU WISH A PRINTED OUTPUT (Y/N)?  Y
```

Listing 17: *The report given at the conclusion of the search. The header summarizes the search specifications. The articles that meet the specifications follow.*

```
                Fuzzy Search of Library COMPJOUR
-------------------------------------------------------------------
Interrogation Phrase :
   (GRAPHICS*PLOTTER*(PROGRAM*BASIC))
Interrogation Phrase Definitions :
   GRAPHICS : GRAPHICS 1.0
   PLOTTER : PLOTTER 0.9 PRINTER 0.4
   PROGRAM : PROGRAM 1.0 LISTING 1.0
   BASIC : BASIC 1.0
Selection Level : 0.2
-------------------------------------------------------------------
Record :   17          Level : 0.8
BYTE                   Hidden Line Subroutines for 3-dimensional Plotting
May 78 p49             Gottlieb, M.

Record :   56          Level : 0.4
BYTE                   Image Processing With a Printer
Feb 81 p220            Calkins, C.A.
```


MODEM
$129.95

No other acoustic modem gives you all these features at this low price.

The MFJ-1232 Acoustic Modem gives you a combination of features, quality and performance that others can't match at this price.

0-300 Baud, Bell 103 compatible. Originate/Answer. Half/full duplex. RS-232, TTL, CMOS level compatible. **Use any computer.** Cassette tape recorder ports save data for reloading or retransmission. 6 pole active filter handles weak signals. Carrier detect LED indicates adequate signal strength for data recognition. Quality "muffs" gives good acoustic coupling, isolates external noise for reliable data transfer. Crystal controlled. "ON" LED. Aluminum cabinet. 110 VAC or 9 volt batteries. 9x1½x4 in.

Apple II, II Plus: software and cable for modem, MFJ-1231, $39.95. Plugs into game port. No serial board needed.



It's like having an extra port **$79.95**

MFJ-1240 RS-232 TRANSFER SWITCH. Switches computer between 2 peripherals (printer, terminal, modem, etc.). Like having extra port. **Push button switches** 10 lines (pins 2,3,4,5,6,8, 11,15,17,20). Change plug or cable to substitute other lines. Push button reverses transmit-receive lines. LEDs monitor pins 2,3,4,5,6,8,20. PC board eliminates wiring, crosstalk, line interference. 3 RS-232 25 pin connectors. 7x2x6 in.

$99.95 MFJ-1108 AC POWER CENTER. Adds convenience, prevents data loss, head bounce, equipment damage. **Relay** latches power off during power transients. **Multi-filters** isolate equipment, eliminate interaction, noise, hash. **Varistors** suppress spikes. 3 isolated, switched socket pairs. One unswitched for clock, etc. Lighted power, reset switch. Pop-out fuse. 3 wire, 6 ft. cord. 15A, 125V, 1875 watts. Aluminum case. Black. 18x2¾x2 in. **MFJ-1107, $79.95.** Like 1108 less relay. 8 sockets, 2 unswitched. **Other models available,** write for free specification sheet.

Order from MFJ and try it. If not delighted, return within 30 days for refund (less shipping).
One year unconditional guarantee.
Order yours today. Call toll free 800-647-1800. Charge VISA, MC. Or mail check, money order. Add $4.00 each for shipping and handling.

CALL TOLL FREE ... 800-647-1800
Call 601-323-5869 in MS, outside continental USA

MFJ ENTERPRISES, INCORPORATED
921 Louisville Road, Starkville, MS 39759

www.americanradiohistory.com

Introducing...the Byte Book Club

FORMERLY COMPUTER PROFESSIONALS' BOOK CLUB

MICROCOMPUTER GRAPHICS AND PROGRAMMING TECHNIQUES. *By* H. Katzan, Jr. *240 pp., 100 illus. and tables.* Here's a stimulating introduction to computer graphics for small computers. It covers all the advances to date in color coding and computer graphics technology and—best of all—it's written for information professionals who can't draw! Includes actual graphics programs worth hundreds of dollars!
582576-7 $18.95

COMPILER CONSTRUCTION: Theory and Practice. *By* W. A. Barrett *and* J. D. Couch. *661 pp., illus.* Everything its title promises! An excellent introduction to the world of automatic translation, this is a mix of mathematical foundations of compilers and the practical considerations required in developing high-quality compilers for commercial release.
788/499B $25.93
(Counts as 2 of your 3 books)

MICROCOMPUTER INTERFACING *By* B. Artwick
789/436B $28.00
(Counts as 2 of your 3 books)

AN INTRODUCTION TO VISICALC® MATRIXING FOR APPLE® AND IBM®. *By* H. Anbarlian. *252 pp., illus., softcover.* Enables you to use VisiCalc matrixes—also known as templates and models—to put your Apple or IBM personal computer to productive use almost immediately. It describes the actual process of developing matrixes for such applications as expense vouchers, price/earnings ratios, payrolls, stock portfolios, and more.
016/054 $22.95

THE PASCAL HANDBOOK *By* J. Tiberghien
582365-9B $35.00
(Counts as 2 of your 3 books)

THE SCIENCE OF PROGRAMMING *By* D. Gries
582452-3 $19.80

SOFTWARE ENGINEERING: A Practitioner's Approach. *By* R. S. Pressman. *576 pp., 180 illus.* Gives you a concise but complete picture of each step in the software engineering process—a set of techniques that deal with software as an engineered product. Each step is discussed and illustrated—from planning, analysis, and design to implementation, testing, and maintenance—to show exactly what's involved.
507/813B $32.95
(Counts as 2 of your 3 books)

ASSEMBLERS, COMPILERS, AND PROGRAM TRANSLATION *By* P. Calingaert
582110-9 $22.95

MINICOMPUTER AND MICROPROCESSOR INTERFACING. *By* J. C. Cluley. *266 pp., 73 illus. and tables.* Unless you are content to have your information processing system simply talk to itself, you need the intense coverage of interfacing provided so brilliantly by this compact volume. In addition to discussing the logical design of interfaces assembled from small-scale integrated circuits, the book gives you a lucid picture of the interface packages designed for microprocessor systems and the way in which they are used.
582585-6B $27.50
(Counts as 2 of your 3 books)

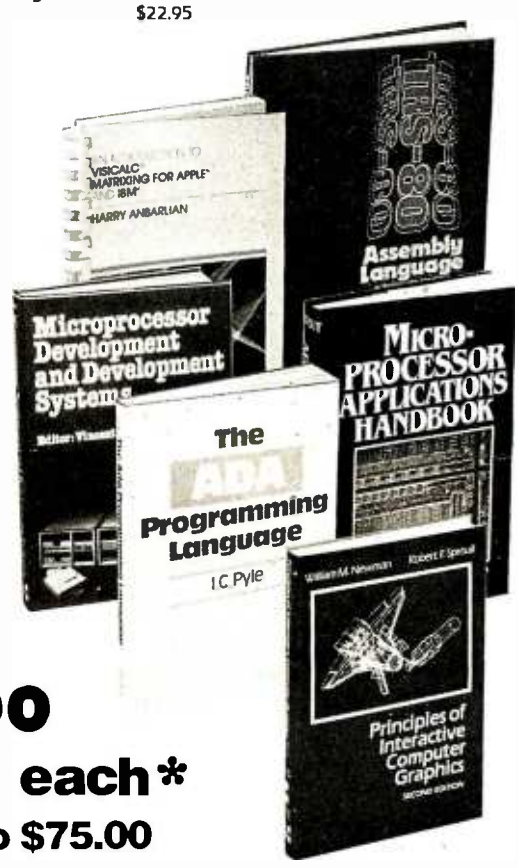

POWERFUL TOOLS!
POWERFUL SAVINGS!

Take any 3 books for only $1.00 each*

Values up to $75.00

BIT-SLICE MICROPROCESSOR DESIGN. *By* J. Mick *and* J. Brick. *398 pp.* All in one place—the crucial information you've been needing about the 2900 family of bit-slice microprocessor components. This remarkable "first" designs right before your eyes not just one but *two* complete 16-bit machines!
417/814B $29.50
(Counts as 2 of your 3 books)

MICROPROCESSOR APPLICATIONS HANDBOOK. *Edited by* D. F. Stout. *472 pp., 284 illus.* This BIG book on SMALL chips will help you make your systems timely, versatile, and cost-effective. The 16 expert contributors provide in-depth treatments of both hardware and software so you can completely analyze, design, construct, and program.
617/988B $35.00
(Counts as 2 of your 3 books)

PROGRAMMING WITH ADA: An Introduction By Means of Graduated Examples *By* P. Wegner
789/24X $17.95

THE SMALL COMPUTER CONNECTION: Networks for the Home and Office. *By* N. L. Shapiro. *256 pp.* Shows you how to use existing hardware and software to link your small computer to other computers—large and small—and to a vast universe of databases. From stock market quotations to using interactive "chat modes," you'll learn how to use today's giant information utility services.
564/124 $16.95

THE SOUL OF A NEW MACHINE *By* T. Kidder
582439-6 $13.95

THE DEVIL'S DP DICTIONARY *By* S. Kelly-Bootle
340/226 $8.50

ELECTRONICS ENGINEERS' HANDBOOK, 2/e *By* D. G. Fink & D. Christiansen
209/812A $75.00
(Counts as 3 of your 3 books)

SOFTWARE DEBUGGING FOR MICROCOMPUTERS *By* R. Bruce
582075-7 $18.95

Z80 USERS MANUAL. *By* J. Carr. *326 pp., with diagrams, charts, and tables.* Takes you through every opportunity the ZAP can offer! It covers Z80 pin definitions, CPU control signals, support chips, interfacing peripherals, and much more. It also includes a 177-page Z80 instruction set so you can study the instructions on a one-by-one basis.
582336-5 $21.95

ELECTRONIC GAMES *By* W. H. Buchsbaum
087/210B $26.95
(Counts as 2 of your 3 books)

COMPUTER PERIPHERALS FOR MINICOMPUTERS, MICROPROCESSORS, AND PERSONAL COMPUTERS *By* C. L. Hohenstein
294/518 $21.90

A PROGRAMMER'S GUIDE TO COBOL *By* W. J. Harrison
789/789 $18.95

MICROPROCESSOR DATA BOOK. *By* S. A. Money. *350 pp., 220 illus.* A truly awesome collection of data about virtually every chip available today! International in scope, the book provides information about 4, 8, and 16-bit devices from a wide range of American, European, and Japanese manufacturers. A common format enables you to analyze each device's capabilities and compare it with other devices.
427/062B $35.00
(Counts as 2 of your 3 books)

www.americanradiohistory.com

Consider these Byte Books as well!

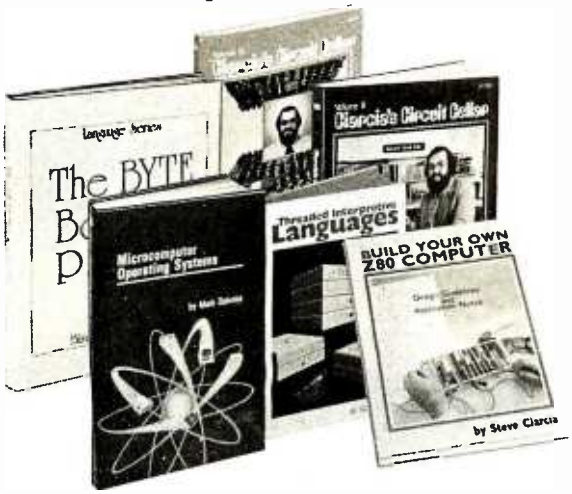

MICROCOMPUTER OPERATING SYSTEMS *By* M. Dahmke
150/710 $15.95

TRS-80 GRAPHICS FOR THE MODEL I AND MODEL III *By* D. Kater & S. Thomas
333/033 $12.95

THREADED INTERPRETIVE LANGUAGES *By* R. G. Loeliger
383/60X $20.75

THE BRAINS OF MEN AND MACHINES *By* E. W. Kent
341/230 $20.95

BASIC SCIENTIFIC SUBROUTINES, Vol. II *By* Dr. F. R. Ruckdeschel
542/023B $26.50
(Counts as 2 of your 3 books)

CIARCIA'S CIRCUIT CELLAR, Vol. 2 *By* S. Ciarcia
109/63X $14.75

BYTE BOOK OF PASCAL *By* B. W. Liffick
789/673B $25.00
(Counts as 2 of your 3 books)

BASIC SCIENTIFIC SUBROUTINES, Vol. I *By* Dr. F. R. Ruckdeschel
542/015 $24.50

CIARCIA'S CIRCUIT CELLAR, Vol. III *By* S. Ciarcia
109/656 $12.95

MICROCOMPUTER DISK TECHNIQUES *By* P. Swanson
625/824 $15.00

BUILD YOUR OWN Z-80 COMPUTER *By* S. Ciarcia
109/621 $17.95

*** If you join now for a trial period and agree to purchase three more books—at handsome discounts—during your first year of membership. (Publishers' prices shown)**

PRINCIPLES OF INTERACTIVE COMPUTER GRAPHICS. *By* W. M. Newman *and* R. Sproull. *2nd Ed., 544 pp., illus.* Now in a revised, updated Second Edition, this volume has long been THE standard source of information for designers! Now, as before, it is utterly comprehensive and up to the minute in its coverage.
463/387B $32.50
(Counts as 2 of your 3 books)

MICROPROCESSORS/ MICROCOMPUTERS / SYSTEM DESIGN *By* Texas Instruments, Inc.
637/58XB $29.95
(Counts as 2 of your 3 books)

DATA STRUCTURES USING PASCAL. *By* A. M. Tenenbaum *and* M. J. Augenstein. *544 pp., illus.* With its emphasis on structured design and programming techniques, this work takes you on a trailblazing journey through PASCAL. Separate chapters are devoted to the stack, recursion, queues and lists, PASCAL list processing, trees, graphs and their applications.
582230-XB $25.95
(Counts as 2 of your 3 books)

INTRODUCTION TO WORDSTAR™. *By* A Naiman. *202 pp., with illus. and command displays.* Get your hands on this guide to the most powerful word-processing program available. Well organized and clearly written, it surpasses the dry WordStar reference manual. You'll learn to edit copy • create and merge files • format on-screen • create special print effects • generate form letters • and more!
582594-5 $21.95

APPLE MACHINE LANGUAGE *By* D. Inman & K. Inman
582398-5 $19.95

THE ADA PROGRAMMING LANGUAGE. *By* I. C. Pyle. *293 pp., illus., softbound.* Written primarily for practicing programmers of embedded computer systems, this book provides a full presentation of the power of ADA. It will also prove of great interest to other programmers as well as to managers of programming projects.
582447-7 $15.95

STRUCTURED PROGRAMMING: Theory and Practice *By* R. C. Linger, H. D. Mills & B. I. Witt
788/537 $22.95

ELECTRONICS DICTIONARY, 4/e *By* J. Markus
404/313B $32.95
(Counts as 2 of your 3 books)

NETWORK SYSTEMS. *By* R. L. Sharma, P. J. T. deSousa, *and* A. D. Inglé. *321 pp., illus.* Here is the first book to describe—concisely and comprehensively—all current stored program-controlled (SPC) telecommunication network systems that use integrated modeling, analysis, and design techniques. Gives you a solid methodology for minimizing the risks involved in meeting design specifications.
582557-OB $29.95
(Counts as 2 of your 3 books)

TRS-80 ASSEMBLY LANGUAGE. *By* H. S. Howe, Jr. *186 pp., illus.* Everything you need to know to develop machine language programs for the TRS-80! This book covers all introductory concepts in the use of the TRS-80 . . . provides "inside information" about ROM, RAM, and disk operating systems to show you what goes on inside the TRS-80 . . . and offers a variety of tested programs and subroutines.
582495-7 $17.95

MICROPROCESSOR DEVELOPMENT AND DEVELOPMENT SYSTEMS. *Edited by* V. Tseng. *170 pp., 90 illus.* A panel of experts provides an overview of the development process, displays the different approaches taken by leading firms in the field, and covers existing systems and tools. You'll gain a better understanding of what is involved in microprocessor application development . . . and you'll be able to identify and decide what is important for you.
653/801B $29.95
(Counts as 2 of your 3 books)

OPERATING SYSTEMS *By* H. Lorin & H. M. Dietel
582354-3 $20.95

APPLE PASCAL: A Hands-On Approach. *By* A. Luehrmann *and* H. Peckham. *426 pp., spiralbound.* Finally—a how-to-use-PASCAL book for Apple computer users that makes a complete language as easy as (forgive us!) applesauce. Takes you from "total ignorance" all the way up to a very impressive competence in the use of that rather complex language, PASCAL.
491/712 $16.95

Why YOU should join the Byte Book Club now!

- **Best and newest books from ALL publishers!** Books are selected from a wide range of publishers by expert editors and consultants to give you continuing access to the best and latest books in your field.
- **Big savings!** Build your library and save money too! Savings range up to 30% or more off publishers' list prices—usually 20% to 25%.
- **Bonus books!** You will immediately begin to participate in our Bonus Book Plan that allows you savings of between 70%-80% off the publishers' prices of many professional and general interest books!
- **Convenience!** 14-16 times a year (about once every 3-4 weeks) you receive the Club Bulletin FREE. It fully describes the Main Selection and alternate selections. A dated Reply Card is included. If you want the Main Selection, you simply do nothing—it will be shipped automatically. If you want an alternate selection—or no book at all—you simply indicate it on the Reply Card and return it by the date specified. You will have at least 10 days to decide. If, because of late delivery of the Bulletin you receive a Main Selection you do not want, you may return it for credit at the Club's expense.

As a Club member you agree only to the purchase of three additional books during your first year of membership. Membership may be discontinued by either you or the Club at any time after you have purchased the three additional books. Orders from outside the U.S. cannot be accepted.

MAIL CARD OR THIS COUPON TODAY

McGraw-Hill Book Clubs
BYTE BOOK CLUB
P.O. Box 582, Hightstown, New Jersey 08520

Please enroll me as a member and send me the three choices I have listed below. Bill me only $3.00 plus local tax, postage, and handling. If not satisfied, I may return the books within 10 days and my membership will be canceled. I agree to purchase a minimum of three additional books during my first year of membership as outlined under the Club plan described in this ad. A shipping and handling charge is added to all shipments.

Name _____

Address/Apt. _____

City/State/Zip _____

Corporate Affiliation _____

This order subject to acceptance by McGraw-Hill. All prices subject to change without notice. Offer good only to new members. Orders from outside the U.S. cannot be accepted.

P39597

www.americanradiohistory.com

ROTERP: An Interpretive Language for Robot Control

High-level languages may help bridge the gap between artificial intelligence and the home experimenter's robot.

Gary Liming
1224 South Wheaton
St. Charles, MO 63301

A quick survey of the information being published on experimental robotics and artificial intelligence reveals a gap in practical information between the two subjects where there should be a bridge. Paradoxically, while most experiments in artificial intelligence are performed in high-level languages (notably LISP), most books and articles for robotics experimenters concentrate on hardware design and leave software control to assembly-language routines.

The assembly-language approach to robot control involves combining routines to produce a particular behavior in a robot. This method does have practical advantages: it requires little initial planning, it is usually memory-efficient, and the code can be entered by using simple switches or a keypad, making more expensive peripherals dedicated to the robot unnecessary. A major drawback, however, is the time and effort it takes to reorganize the routines to produce new behavior in the robot.

Perhaps the greatest disadvantage of using assembly language is the difficulty other experimenters have understanding the origins of a robot's behavior. Because assembly language is difficult to read, the underlying cause of the robot's behavior may elude even the well-versed experimenter. Duplicating the behavior of a robot with a different processor is usually even more difficult.

A microprocessor specifically designed for robotic control would resolve these problems. Such a microprocessor would use simple commands that exercise all of the robot's capabilities. A program for this microprocessor might look something like listing 1, which causes the robot to slowly walk a three-foot square. In addition to being easier to understand than assembly language, the program requires only 24 bytes of storage.

Listing 1: *This example of a first attempt at a robotic language suggests how a robot-control language should look. Instructions are simple enough to be very flexible (they might be used in any number of situations) yet powerful enough so that the programmer doesn't get bogged down in details.*

```
0000  05          SLOW
0001  08          FEET
0002  30  0003    FORWARD 3
0005  34  0090    TURN RIGHT 90
0008  30  0003    FORWARD 3
0011  34  0090    TURN RIGHT 90
0014  30  0003    FORWARD 3
0017  34  0090    TURN RIGHT 90
0020  30  0003    FORWARD 3
0023  00          HALT
```

Enter the "Pseudoprocessor"

Our theoretical microprocessor would be practical only if all the components of the robot could be anticipated and mass production could justify its cost. In fact, custom processors have been used in intelligent instruments and even in sophisticated toys, but an experimental robot is a low-volume item and must be flexible enough to accommodate major new functions and devices. To expect all experimenters to use the same microprocessor is unrealistic.

In lieu of a custom microprocessor, we might create a "pseudoprocessor" in software. Not only would it execute our robotic instructions, but it would be easy to extend or modify as well. This pseudoprocessor could be in the form of a small interpreter, possibly in PROM (programmable read-only memory). The interpreter

www.americanradiohistory.com

Games that challenge you at a price that won't.

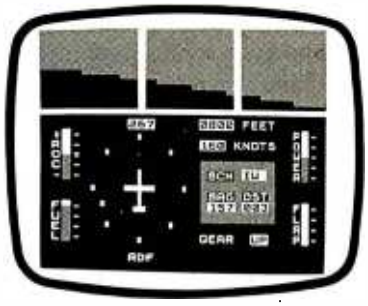

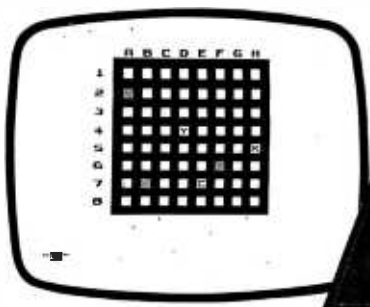

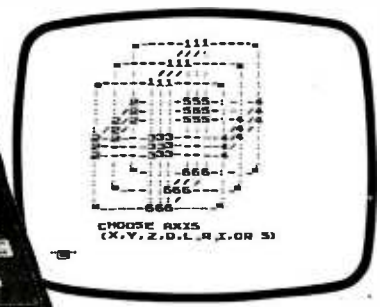

$79.95 **Look to Sinclair for the only $79.95 computer and the first Serious Games Package. A special limited time offer. Call toll free today.**

What could be more challenging than creating your own games on a personal computer? Or being intellectually challenged by serious games where you match wits with a computer or another opponent in a fierce trial of skills?

The Timex/Sinclair 1000* is a fully programmable computer with a powerful BASIC language and complete instruction manual, all for only $79.95. The moment you sit down with the TS1000 you can learn how to program your own games. Maybe you want to create a stock market game, a word game, a mathematical game. The challenges are endless.

For this one low price, the TS1000 comes with everything you need for connecting the computer to your color or black-and-white TV.

Of course, you might also want pre-programmed software cassettes for your $79.95 computer. You'll have a wide choice with our free software catalog which comes with the TS1000. And the software cassettes play in any cassette recorder.

The 16K Memory Module. More power to you.

Let's say you want to go one step further. The 16K Memory Module allows you and your family to be challenged by even more sophisticated games. Not mindless arcade games, but serious, intellectually stimulating games which are both fun and educational.

The Memory Module costs only $49.95 and plugs onto the back of the TS1000 for 8 times more memory capacity. A whole new world of software is available to those with the 16K Memory Module.

The Serious Games Package. A $75 value for only $50.

For those who want a lot of serious 16K games, Sinclair announces a special software offering with a $25 savings! Now, for the first time, you can receive all five games shown above at the reduced price of only $50.

Chess: You can play with another opponent or you can match wits with the computer.

Flight Simulator: Maneuver and land a light aircraft with full cockpit controls, instrumentation and navigational aids. You have to allow for wind velocity and direction, rate of descent and mountainous terrain.

Cube Game: Every bit as mind-baffling as Rubik's Cube.

Backgammon: Everyone's favorite. Again, you can play against another opponent or against the computer. Complete with a doubling cube.

Mixed Game Bag: A series of memory and concentration tests including Robot Wars, a version of "Master Mind".

There's never been a better value on a serious games package. And to think it all starts on a $79.95 computer!

Why order today?

In addition to saving $25 on software, there are other reasons to buy your TS1000 today. Computers costing hundreds and even thousands of dollars rarely offer you games this serious or challenging.

Another reason to order today is convenience, by toll-free phone. No crowds, no waiting lines, no parking worries. It's never been easier to get started in the world of computers. Or more worthwhile.

How to order today!

Just call our toll-free number and use your MasterCard or VISA. Or send the coupon with a check or money order. Then try out the Timex/Sinclair 1000 for 10 days at no risk. If you're not entirely satisfied, we will refund your money. It's as easy as that. (Sorry, no refunds on software.)

Call toll-free: 800-543-3000. Ask for operator 509. In Ohio call: 800-582-1364. Ask for operator 509. In Canada call 513-729-4300, operator 509. Have your MasterCard or VISA ready when calling. Phones open 24 hours a day, 7 days a week. These numbers are for *orders only.*

If you simply want information, please don't call, write Sinclair Research, Ltd., 2 Sinclair Plaza, Nashua, NH 03061.

Call toll free 800-543-3000
(operator 509)

Ad code: B3BY

Mail to: Sinclair Research, Ltd.
One Sinclair Plaza, Nashua, NH 03061

☐ Check or Money Order enclosed

	Price**	Qty.	Amount
TS1000	$79.95		
16K Memory Module	$49.95		
16K Cassettes	$15.00 each		
Special Serious Games Package (5 games valued at $75.00)	$50.00		
Shipping/Handling	$ 5.00		$ 5.00
**U.S. Dollars		Total:	

Cassettes for 16K Memory Module: $15.00 each. Check the boxes of all the cassettes you want.

☐ Flight Simulator #6
☐ Chess #7
☐ Backgammon #8
☐ Cube Game #9
☐ Mixed Game Bag #26
☐ I'll take all 5 cassettes included in Sinclair's Special Serious Games Package.

Name

Street

City

State Zip

*Sinclair technology is the heart of both the ZX81 and the Timex/Sinclair 1000 computer.

sinclair

www.americanradiohistory.com

Single-Board Computer
—Microprocessor
—Limited available memory
—I/O interfaces

Output Devices
—Motors for forward, reverse, and turning motions
—Numeric display
—Bell or buzzer

Input Devices
—Proximity switches or ultrasonic sensors
—Numeric keypad
—Light detector

Table 1: *Attributes of a simple experimental robot.*

would fetch each instruction of the program from memory and call an appropriate routine to execute that instruction. The pseudoprocessor technique is not new; languages like Pascal and even some adventure-type games have been implemented for microprocessor systems using the concept.

If all of this sounds like an argument on behalf of the use of high-level languages, it is. A robotic pseudoprocessor has a number of advantages. First, it provides programming at a behavioral level that is easy for the programmer (or anyone else) to understand. And it creates programs that are less machine-dependent. It is also conducive to the creation of more powerful instructions than those on most microprocessors. Finally, it can be extended and modified, if designed properly.

A Simple Design

Let's see how the pseudoprocessor approach can be applied in a simple example. Table 1 shows the attributes of a basic experimental robot. It consists of an SBC (single-board computer) like many of those currently available, a frame and motors constructed with treads or wheels for mobility, some proximity sensors and light detectors, a bell or buzzer, and a numeric display and keypad (found on the SBC).

Given these simple peripheral devices, we can envision what a pseudoprocessor for a robot will look like. Of course, it will need instructions to turn the drive motors on and off and to acquire data from the sensors. It will have registers to count units of time and distance. Instructions that change the program flow and conditional testing will enhance its ability to make decisions. And it will include such standard items as a program counter, general-purpose registers, and I/O (input/output) instructions.

Figure 1 shows the architecture of the interpreter for the simple robot I named ROTERP. It has 26 general-purpose 16-bit registers, a program counter, condition codes, and some special-purpose registers. (I chose to have 26 general-purpose registers because they are easily represented by the letters of the alphabet.)

The array register, a location that points to the array being referenced, functions like an index register found on other processors. The speed register is a location for a number that the movement instructions use to determine a rate of speed. The distance-units register is a location that movement instructions use to set a scale for movement, and the time-units register specifies a time scale.

To produce a particular behavior, the registers are manipulated by the

The DS120 Terminal Controller makes your LA36 perform like a DECwriter® III.

The Datasouth DS120 gives your DECwriter® II the high speed printing and versatile performance features of the DECwriter® III at only a fraction of the cost. The DS120 is a plug compatible replacement for your LA36 logic board which can be installed in minutes. Standard features include:

- 165 cps bidirectional printing
- Horizontal & Vertical Tabs
- Page Length Selection
- 110-4800 baud operation
- 1000 character print buffer
- X-on, X-off protocol
- Self Test
- RS232 interface
- 20 mA Current Loop interface
- Top of Form
- Adjustable Margins
- Double wide characters
- Parity selection
- Optional APL character set

Over 5,000 DS120 units are now being used by customers ranging from the Fortune 500 to personal computing enthusiasts. In numerous installations, entire networks of terminals have been upgraded to take advantage of today's higher speed data communications services. LSI microprocessor electronics and strict quality control ensure dependable performance for years to come. When service is required, we will respond promptly and effectively. Best of all, we can deliver immediately through our nationwide network of distributors. Just give us a call for all the details.

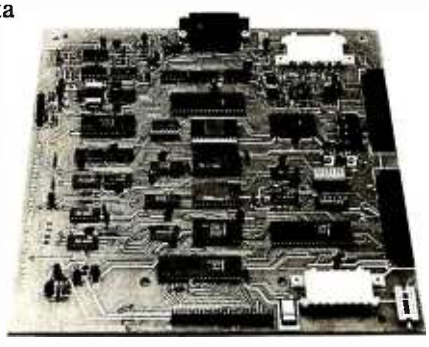

datasouth computer corporation

4216 Stuart Andrew Blvd. • Charlotte, North Carolina 28210 • 704/523-8500

Circle 141 on inquiry card.

www.americanradiohistory.com

NUMERO UNO
IN SPANISH SOFTWARE

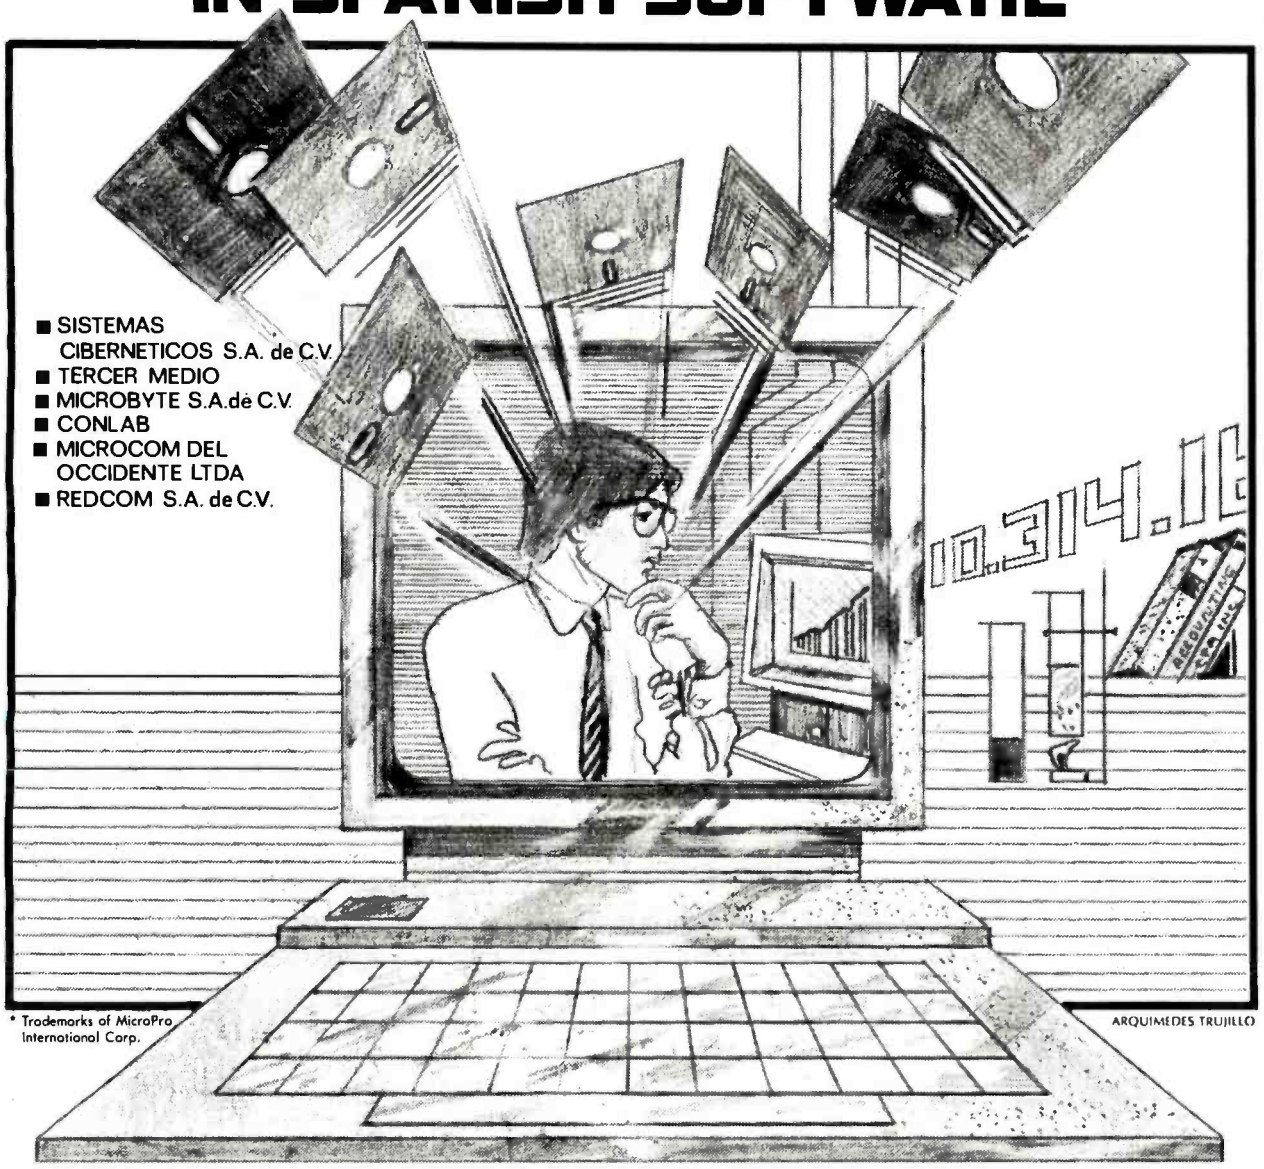

We're reaching into a dynamic new frontier. . . We're International Micro Systems, the first distributor to specialize in Spanish software, specifically tailored to solve all your business needs. We support all major brand computers: APPLE, IBM Personal Computer, ATARI, TRS - 80, and CP/M ® systems:

Word Processors	Cost Control
Accounting	Bank Control
Inventory Control and Invoicing	Clinical Lab Control
DataStar*	Clinical Records Control
CalcStar*	Construction Cost Analysis
PERT CPM	Financial Analysis
WordStar*	Report Generators
MailMerge*	Program Generators
Accounts Receivable	Games

And we can make them work for you, the businessperson that demands a Spanish speaking computer or the dealer with an irresistible urge to fulfill your customers' rising demands for Spanish software.
For more information, please write or call us at:

International Micro Systems, Inc.
9380 Sunset Drive Suite B 210
Miami, Florida 33173
(305) 279-0186 or (305) 279-0194

Circle 214 on Inquiry card.

www.americanradiohistory.com

instruction set given in table 2, which shows each instruction op (operation) code, its associated mnemonic, the type of operand it uses, and the number of bytes per instruction. Although the op codes are shown in hexadecimal, they could easily be given in decimal; hexadecimal was chosen only for convenience. The first 64 instructions control the robot's movement while the last 64 instructions control the processor registers. Because ROTERP uses 8-bit op codes, 128 possible instructions are still available for expansion.

In order to understand the origin of behavior in our simple robot, we need to look more closely at the instructions it follows. The first group of instructions, op codes 00 through 0F hexadecimal, are all 1-byte instructions. HALT simply returns control to the monitor ROM (read-only memory) on the SBC. ZERO initializes all the processor registers except the program counter. FAST, MEDIUM, and SLOW place a predetermined number in the speed register. Similarly, INCHES, FEET, and METERS store a value in the distance-units register, and MILLSEC, SECONDS, and HOURS set the time-units register. REPEAT places the starting address of the program into the program counter and normally causes it to loop indefinitely at the end of a program. RETURN signals the end of a subroutine.

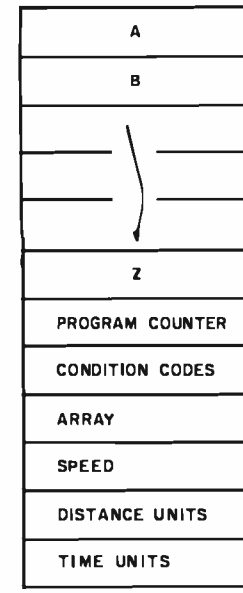

Figure 1: *Architecture of ROTERP, the interpreter for a simple robot. The interpreter handles 16-bit-wide registers (there is a general-purpose register for each letter of the alphabet as well as registers for condition codes and special purposes).*

The next group of instructions, 10 through 1F hexadecimal, are each 2 bytes long and use a single-byte operand to specify a general-purpose register that contains a working value. For instance, BEEP C, represented as 17 03, causes the robot to beep the number of times indicated by register C. FORWARD B (10 02) causes the robot to move forward the number of units defined in register B. Similarly, HESITATE A (19 01) causes the robot to wait A units of time, DISPLAY A displays register A, and ENTER A places a number from the keypad in register A. TEST tests the indicated register and sets the appropriate condition codes. RANDOM returns a random number and places it in the given register. SCAN and PROXIMITY read the respective

THE BENCHMARK®

A Word Processor Worthy of Comparison . . .

FEATURE	BENCHMARK 2.0	Wordstar 3.21	BENCHMARK 3.0
Ease of Operation	YES	NO	YES
Plain English Commands	YES	NO	YES
Use Cursor Keys	YES	NO	YES
Control Characters	NO	YES	NO
Function Keys	YES	NO	YES
Computer Aided Tutorial	YES	YES	YES
Descriptive Directory	YES	NO	YES
29 Character Title	YES	NO	YES
Author & Operator ID	YES	NO	YES
Document Size	YES	NO	YES
Creation Date	YES	NO	YES
Revision Time & Date	YES	NO	YES
Standard Editing Features	YES	YES	YES
Go To Any Page	YES	NO	YES
Interactive Printing	YES	NO	YES
Automatic Reformatting	YES	NO	YES
Automatic Repagination	YES	NO	YES
Headings and Footings	YES	YES	YES
Multi-line	YES	NO	YES
Keyboard Phrases	YES	NO	YES
Proportional Printing	NO	NO	YES
Business Graphics	NO	NO	YES
Paragraph Assembly	NO	NO	YES
Edit Marking	NO	NO	YES
Auto Widow/Orphan Protect	NO	NO	YES
Auto Footnoting	NO	NO	YES
Built In Calculator	NO	NO	YES
Price	$249	$495	$499

DEMAND A COMPARISON!

Call or Write:
Metasoft Corporation, 711 E. Cottonwood, Suite E, Casa Grande, AZ 85222 • (602) 961-0003

Circle 266 on inquiry card.

www.americanradiohistory.com

MICROFAZER
THE "ANY COMPUTER ANY PRINTER" BUFFER™

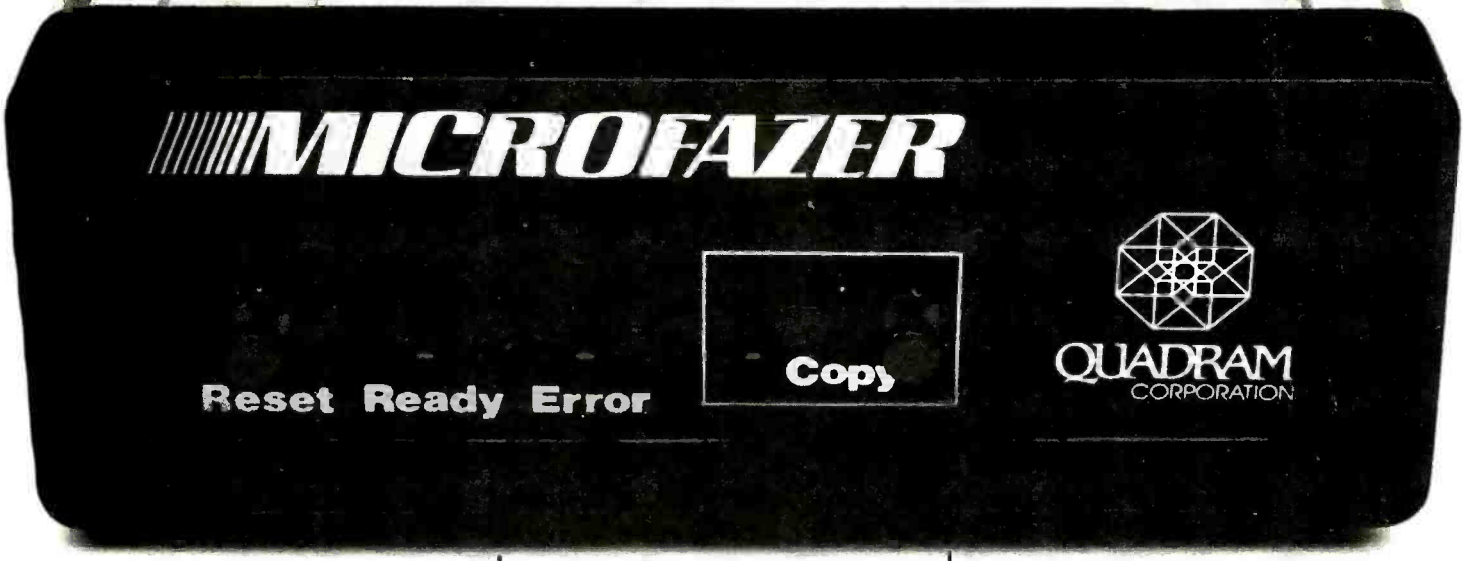

Time is money. You have a computer system because you know that it saves you money by simplifying procedures and reducing time normally involved in your work. Time is an important resource which should not be wasted. You are wasting valuable time if you ever wait for your printer.

No waiting. Now with Microfazer by Quadram there is no more waiting.

Microfazers are inexpensive universal printer buffers which any computer user cannot afford to be without. Any computer—any printer (or plotter!), whether parallel or serial. Microfazer receives information from the computer at ultra high speeds causing the computer to think the printer is printing just as fast as the computer can send. Microfazer holds the information until your printer can handle it, and then sends it on.

More copies. Microfazer is equipped with a copy feature allowing additional copies of the buffered information—from one to as many as you want—with the mere press of a button. When you need your information repeated, for whatever reason, it's always right there—inside Microfazer.

Microfazer™ stack. Microfazer can be stacked with popular modems or other peripherals. Some models can plug directly onto the back of your printer. Install it in less than 60 seconds, and choose the amount of buffer memory you need— 8K, 16K, 32K, or 64K. One model even comes with up to 512K! You may use several Microfazers in series to create just what's right for you. Take data in from a serial computer and out to a parallel printer. Or in from a parallel computer and out to a serial printer. Microfazer is just as flexible as you need it to be.

Low price. Only $169 for 8K of buffering, $189 (16K), $225 (32K) and $299 for a full 64K. Serial-to-Parallel, Parallel-to-Serial and Serial-to-Serial models have slightly higher prices.

QUADRAM
CORPORATION
4357 Park Drive / Norcross, Ga. 30093
(404) 923-6666
Circle 367 on inquiry card.

www.americanradiohistory.com

Op code	Mnemonic	Operand type	Bytes required	Op code	Mnemonic	Operand type	Bytes required	Op code	Mnemonic	Operand type	Bytes required	Op code	Mnemonic	Operand type	Bytes required
00	HALT		1	20	FORWARD	RC*	2	40	JUMP	R	2	60	SET	R,R	3
01	ZERO		1	21	REVERSE	RC	2	41	JUMPEQ	R	2	61	ADD	R,R	3
02				22	RIGHT	RC	2	42	JUMPNE	R	2	62	SUB	R,R	3
03	FAST		1	23	LEFT	RC	2	43				63	MUL	R,R	3
04	MEDIUM		1	24	RTURN	RC	2	44	SBROUTNE	R	2	64	DIV	R,R	3
05	SLOW		1	25	LTURN	RC	2	45	ARRAY	R	2	65			
06				26				46				66			
07	INCHES		1	27				47				67	COMPARE	R,R	3
08	FEET		1	28				48				68	GET	R,R	3
09	METERS		1	29				49				69	PUT	R,R	3
1A	MILLISEC		1	2A				4A				6A			
0B	SECONDS		1	2B				4B				6B			
0C	HOURS		1	2C				4C				6C			
0D				2D				5D	INCRMENT	R	2	6D			
0E	REPEAT		1	2E				4E	DECRMENT	R	2	6E			
0F	RETURN		1	2F				4F	CLEAR	R	2	6F			
10	FORWARD	R*	2	30	FORWARD	N*	3	50	JUMP	N	3	70	SET	N,R	4
11	REVERSE	R	2	31	REVERSE	N	3	51	JUMPEQ	N	3	71	ADD	N,R	4
12	RIGHT	R	2	32	RIGHT	N	3	52	JUMPNE	N	3	72	SUB	N,R	4
13	LEFT	R	2	33	LEFT	N	3	53				73	MUL	N,R	4
14	RTURN	R	2	34	RTURN	N	3	54	SBROUTNE	N	3	74	DIV	N,R	4
15	LTURN	R	2	35	LTURN	N	3	55	ARRAY	N	3	75			
16				36				56				76			
17	BEEP	R	2	37	BEEP	N	3	57				77	COMPARE	N,R	4
18	DISPLAY	R	2	38	DISPLAY	N	3	58				78	GET	N,R	4
19	HESITATE	R	2	39	HESITATE	N	3	59				79	PUT	N,R	4
1A				3A	CALL	N	3	5A				7A			
1B	TEST	R	2	3B				5B				7B			
1C	ENTER	R	3	3C				5C				7C			
1D	RANDOM	R	2	3D				5D				7D			
1E	SCAN	R	2	3E				5E				7E			
1F	PROXIMITY	R	2	3F				5F				7F			

Table 2: *Pseudoprocessor instruction set (*R = Register, N = Number, RC = Register Count).*

SCOTCH DISKETTES at 50% off!

ALL 3-M MEDIA AVAILABLE at 50% or MORE OFF LIST PRICE

Why settle for inferior substitutes when you can now get the very best media at unprecedented savings. Be it 8" or 5¼", hard- or soft-sectored: We are an **Authorized 3-M Distributor** and can ship it immediately.

Examples:

Part #		List	OUR PRICE (per diskette, in box of 10, individual envelopes)
744D	5¼" SSDD (hard/soft sector)	4.20	$2.04
745D	5¼" DSDD (hard/soft sector)	6.00	2.94
741D	8" SSDD (hard/soft sector)	5.55	2.75
743D	8" DSDD (hard/soft sector)	7.10	3.39

(even greater savings on diskettes in bulk pack—call for information)

Minimum order: 10 boxes. For orders of 1000 or more deduct 2%, for 5000 or more deduct 5%, for 10,000 or more deduct 7.5%. Call for savings or larger orders.

3M® Authorized Distributor

BHAT

ORDERS & INFORMATION:

Mo.-Fri. 9:00 AM-5:30 PM PST, Sat. 12:00 AM-5:00 PM PST
1-(800) 845-5555 CA, AK, HI call (714) 783-1363

BANK REFERENCE: BARCLAYS BANK OF CALIFORNIA (213) 892-7244
AMERICAN EXPRESS, VISA, MASTERCHARGE
APO, FPO, INTERNATIONAL ORDERS ACCEPTED

INC. P.O. Box 3791, Riverside, CA 92519

Terms: Cashier's check, Visa, MasterCharge, American Express (add 4% for credit cards). Purchase orders from approved organizations on 30 day net at 25% surcharge. COD at 10% surcharge. Shipping charges extra.

Circle 506 on inquiry card.

www.americanradiohistory.com

Rose™

You've Got TOTAL ACCESS™

TO YOUR COMPUTER HARDWARE & SOFTWARE NEEDS. CALL ROSE TODAY!

* DISK DRIVES
  - Total Access 40 Track..... $239
  - Aerocomp 40T Flippy..... $319
  - Aerocomp 80T..... $399
  - Aerocomp 80T Flippy..... $409
  - Aerocomp 40T Dual Head..... $409
  - Aerocomp 80T Dual Head..... $399
  - For TRS80 Mod. I, Mod. III & IBMPC external & TI99/4A incl. power supply & enclosure.
  - NEW: Apple Comporible Drive..... $279
  - Apple Comp. Disk Controller Board.... $89
* BARE DRIVES
  - Torol Access 40T..... $199
  - Aerocomp 40T Flippy..... $269
  - Aerocomp 80T..... $329
  - Aerocomp 80T Flippy..... $359
  - Aerocomp 40T Dual Head..... $329
  - Aerocomp 80T Dual Head..... $469
* DRIVE CABLES
  - 2-drive..... $24
  - 4-drive..... $34
  - Extender cable..... $13
* OPERATING SYSTEMS
  - TRSDOS 2.3 Disk & Manual..... $20
  - LDOS (I or III)..... $119
  - DOSPLUS 3.4..... $129
  - NEWDOS/80 (I or III)..... $129
* DISK CONTROLLERS/SEPARATORS
  - Aerocomp "DDC" double dens. disk controller for Mod. I..... $139
    - w/DOSPLUS 3.3D..... $179
    - w/LDOS..... $229
  - Aerocomp "DDS" double dens. doro sep. for Percom or LN Doubler..... $49
  - Aerocomp "SDS" single dens. doro sep. for Mod. I..... $29
* MODEL III DRIVES
  - NEW: Complete kits including 40 trock disk drives (1 or 2), disk controller board, power supply and all hardware and cables
  - One Drive System Kit..... $479
  - Two Drive System Kit..... $689
* ODD STUFF
  - Single drive power supply..... $44
  - Drive enclosure (silver)..... $24
  - Diskettes (box of 10)..... $24
  - MX80 ribbons..... $9

120 day warranty on drives. Add $5 per drive shipping in Conr. US. UPS COD charge $1.50. There is a 15 day FREE TRIAL ON DRIVES. If not completely satisfied I'll refund your money (less shipping). I'll take exception to improper use or mishandling.

* RADIO SHACK COMPUTERS
  - 26-1061 MIII, LI, 4K..... 595
  - 26-1062 MIII, LII, 16K..... 799
  - 26-1065 MIII, 48K, 1 drive..... 1495
  - 26-1066 MIII, 48K, 2 dr RS232..... 1950
  - 26-3004 16K Color Compurer 299
  - 26-3002 16K CC w/extended BASIC.... 399
  - 26-3003 32K CC w/extended BASIC.... 499
  - 26-3501 PC 1, (Call about accessories).....129
  - 26-3601 PC 2, (Call about accessories).....229
  - 26-4002 64K MII, 1-drive..... 2899
  - 26-6001 128K M16, 1-drive..... 4199
  - 26-6002 128K M16, 2-drive..... 4799
  - 26-6050 DT-1 Terminal..... 599
* PERIPHERIALS – Model I-III-16, CC
  - 32K LNW E/I w/RS232 complete..... 375
  - LNDOUBLER 5/8 w/o DOS..... 199
  - 26-1143 Radio Shack DDen board..... 125
  - 26-1125 MII Hi Res board..... 299
  - 26-1145 MI RS232 firs RS E/I..... 85
  - 26-1148 MIII RS232 with cable..... 89
  - 26-1172 D.C Modem I..... 125
  - 26-1173 D.C Modem II..... 199
  - 26-1208 CCR-81 Recorder..... 51
  - 26-1130 MIII Hard Disk, primary..... 2099
  - 26-1131 MIII Hard Disk, secondary..... 1599
  - 26-1132 Mod I H/D odopter..... 32
  - 16-0230 13" Color TV, remore control... 353
  - 26-1162 MIII 1sr drive kit, pure R.S..... 629
  - 26-3008 C C Joysricks, pr..... 21
  - 26-3022 CC drive 1, includes controller ... 449
  - 26-4104 MI/16 Hi-Res board..... 419
  - 26-4150 MI/16 Hard Disk 8.4Mbyte, pri..3799
  - 26-4151 MI/16 Hard Disk 8.4Mbyte, sec..2899
  - 26-4160 1-Drive expansion..... 938
  - 26-4161 2-drive expansion..... 1431
  - 26-4162 3-drive expansion..... 1897
  - 26-4165 1-drive unit..... 1099
  - 26-4166 2-drive unit..... 1699
  - 26-4167 Thinline odd-on drive..... 535
  - 26-6010 MII to M16 upgrade..... 1299
  - 26-6011 128K RAM board..... 599
* PRINTERS & OTHER ACCESSORIES
  - 26-1158 Daisy Wheel II, 43 cps..... 1599
  - 26-1447 RS Tractor Assy..... 208
  - 26-1448 Sheer Feeder..... 999
  - 26-1165 Line Printer V 160cps..... 1195
  - 26-1455 Acousric cover..... 339
  - 26-1250 DWP-410, 25cps..... 1207
  - 26-1459 R.S. Tractor Assy..... 199
  - 26-1251 DMP-400, 140 cps..... 969
  - 26-1252 DMP-500, 220cps..... 1399
  - 26-1253 DMP-100, 50cps..... 309
  - 26-1254 DMP-200, 120cps..... 679
  - 26-1191 Multi-pen plorrer..... 1650
  - 26-1192 CGP-115 Color prinrer..... 199
  - 26-1193 Florbed plorrer..... 799
  - 26-1195 Digirizer..... 369
  - 26-1196 GT-116 "X-PAD"..... 295
  - ANADEX DP-9260A, 200cps..... 1449
  - PROWRITER 1, 120cps, 10" F/T..... 469
  - PROWRITER 2, 120cps, 15" F/T..... 669
  - STARWRITER F-10, 40cps..... 1399
  - PRINTMASTER F-10, 55cps..... 1599
  - Rurishouser rractor feed..... 208
  - Rurishouser sheer feeder..... 999
* LNW COMPUTERS
  - 96K LNW-80 Model I, NTSC/RGB, RS232, 5"/8" DDen controller, FREE 12" green phosphor monitor and cable included..... 1695
  - 128K LNW-80 Mod II, NTSC/RGB, RS232, CP/M comporible, 5"/8" controller, FREE 12" green phos. monitor/cable included 2495
* MEDIA & SUPPLIES
  - 8" disks SSDDen, Guoranreed Forever..... 32
  - 8" disks DSDDen, Same Guoranree..... 39
  - 5" Flipsorr, holds 50 disks..... 23
  - 8" Flipsorr, same deal..... 29
  - 5" Library Boxes..... 2.50
  - 8" Library Boxes..... 3.50
  - 5" or 8" Head Cleaning Kir..... 9
  - Tract paper Irr size, 2900 sheer 20 lb..... 25
  - Call for ribbon & prinrwheel prices.
* SOFTWARE
  - All Radio Shack Software..... 20% off
  - Aron CP/M, Model II..... 160
  - Pickles & Trour CP/M, Model II..... 160
  - Pickles & Trour CP/M, Model 16..... 190
  - All SNAPPWARE..... 10% off
  - All MicroPro..... 35% off
* TRS-80 SPECIAL EQUIPMENT
  - CP/M (48K) for Mod III w/hardware and software complere..... 275
  - CP/M (64K inc.) for Mod III with hardware and software..... 440
  - 80 x 24 video board for Mod III..... 299
  - GREEN Phospher Anriglore CRT..... 79
  - AMBER Phospher Anriglore CRT..... 89
  - 16K Memory 200nsec Guor 1 yr..... 8/$12
  - 64K Memory 200nsec Guor 1 yr..... 8/$48
  - ZVM-121 12" Green Phos. Mon..... 135

ALWAYS CALL FOR THE LATEST PRICES. They may have changed in the 60+ days since this ad was written.

ORDER NOW! TOLL FREE 800-527-3582

Write or call. Toll free lines are for orders only. Texas residenrs call 214/458-1966 and deducr $2.00 from your order. If you need rechnicol informarion or service use rhe Texas number. Prices are subjecr ro change wirhour norice and are mail order only. I accepr VISA or MASTERCARD, you can send a check or money order (allow a couple of weeks for personal or company checks ro clear) or order COD (cash, certified check or money order only). Shipping is nor included unless otherwise indicored. Texas orders add 5% rax. No rax added on shipmenrs ourside Texas. Order up – I need the money!

TOTAL ACCESS™
P.O. BOX 3002
RICHARDSON, TX 75080
214-458-1966

NEXT DAY SHIPMENT on all in stock Merchandise.

* TRS80 & Radio Shack are trademarks of Tandy Corp. Copyright 1982 TOTAL ACCESS

Circle 429 on Inquiry card.

www.americanradiohistory.com

devices and place the result into the specified register.

The next group of instructions, 20 through 2F hexadecimal, cause their respective motions until the proximity register changes; then motion ceases. The elapsed distance units are then recorded in the given register.

Instructions 30 through 3F hexadecimal are 3-byte commands that use an immediate 16-bit constant for the operand. For example, BEEP 7 (37 0007) signals the robot to beep seven times. In other respects, this group mirrors the group 10 hexadecimal instructions, except for the CALL instruction; CALL is a "hook" to an assembly-language subroutine, and its operand is a 16-bit absolute address.

Five instructions work with the processor registers. JUMP A takes the signed 16-bit value in register A and adds it to the program counter. JUMPEQ and JUMPNE are conditional jumps that test the condition code register. SBROUTNE is a simple subroutine call to a section of the program, and it terminates with a RETURN instruction. Each processor register instruction uses an operand that is a relative offset to the program counter so that the resulting code is position-independent.

The ARRAY instruction declares the array being referenced by adding its operand to the program counter and placing the resulting address in the array register. The INCRMENT, DECRMENT, and CLEAR instructions are added for convenience.

GET and PUT are used with the ARRAY instruction. After an array has been declared, a GET 5,B (70 0005 02) reads the fifth 16-bit element from the array and stores it in register B. The PUT A,B instruction (69 01 02) uses the number in register A as the offset into the array and places the number found there in register B.

Finally, the register-manipulation instructions use a constant or a register to perform an operation on another register. For instance, ADD B,C (60 02 03) means "add register B to register C." COMPARE compares a constant or a register to another register and then sets the appropriate condition code.

Some Examples

Armed with these instructions, let's try them on a simple program. Suppose we want our simple robot to search for a source of light in the room, determine how far away it is, and then report back to us. The resulting program might look something like listing 2. In this program, the robot turns to the right until it faces a source of light. Then it moves forward until it senses or bumps into the source of light, whereupon it moves back to its starting position, displays the distance, and stops. This program requires only 17 bytes through the keypad.

Of course, that is assuming the light sensor is mounted on the front of the robot and the path to the light source is unobstructed. If the program has to take obstructions into account, a triangulation scheme could be worked into it (but that, as they say, is left "as an exercise for the

★ ★ ★ FEATURING 8 AND 16 BIT SYSTEMS ★ ★ ★

EPSON QX VALDOCS: Extremely user friendly! See review Sept. BYTE. HX 80: Notebook-sized battery operated Z 80 computer, up to 256 K RAM, built-in hard copy, LCD scrollable screen.

MASTER MAX: S-100 system, Z-80, INTERCONTINENTAL CPZ48000 single card computer with four channels of I/O MA, dual 8" double density drives, CP/M ..... $2,540.
Options: double sided drives, Winchester, TURBODOS, 2 user, 220v/50hz.

IMS 8X MULTIUSER SYSTEMS: Z-80, S-100. Each user has own Z-80, 64K RAM, 2 I/O. TURBODOS multiuser CP/M compatible operating system cuts link/edit time in half. Z-80 code. Interrupt driven. 8088 upgrade w/256K RAM has been announced.

TARBELL: Empire systems, Z-80, S-100.
CROMEMCO: C-10 personal computer w/software package ..... $1,695.

8088: COLUMBIA DATA: IBM-PC look alike, multiuser option.

8086 S-100 SYSTEMS:
LOMAS: with MS-DOS or CP/M-86. Winchester option.
SEATTLE: with simultaneous 8" and 5" drives. Will accept IBM/PC software.

DUAL PROCESSOR SYSTEMS:
GODBOUT 816 A,B,C: 8085/8088. MP/M 816 allows simultaneous operation of both processors.
CROMEMCO DPU: 68000 and Z 80. CROMIX operating system.

DISK BOX 8" DRIVE SUBSYSTEMS w/QUMES, SHUGARTS, MITSUBISHI, NEC.

PRINTERS (dot matrix and LQ): EPSON, NEC, QUME, C.ITOH, IDS, FLORIDA DATA, TELETYPE.

TERMINALS: WYSE, HAZELTINE, IBM 3101, TELEVIDEO.
Voice recognition board for TELEVIDEO 950.

PER SCI 277/299 DRIVES.

MODEMS: U.S. ROBOTICS 1200/300 DC HAYES compatible ..... $525.

S-100 MAINFRAMES: PARADYNAMICS, ECT, some TEI 12 slot still in stock.

GRAPHICS:
MICROANGELO GRAPHICS.
MIRAGE: new from SCION.
AUTO-CAD Interactive graphics software; for engineers, architects, designers.
HOUSTON INSTRUMENTS PLOTTERS, DMP-29 ..... $1,775.

IBM PC ACCESSORIES: Extensive line including QUADRAM, SEATTLE, 8080/8086 EMULATOR (software).

IBM 3270: compatible equipment from Teletype Corp. Fast delivery! Cost effective!

We have an extensive product line including systems, peripherals, software, boards, drives, consulting services. Write or call for detailed specifications. We have knowledgeable technical staff.

WE EXPORT Overseas Callers: Phone (212) 448-6298
TWX 710 588 2844 or Cable: OWENSASSOC

JOHN D. OWENS Associates, Inc.
12 Schubert Street, Staten Island, New York 10305
(212) 448-6283 (212) 448-2913 (212) 448-6298

JOHN D. OWENS ASSOCIATES INC.

www.americanradiohistory.com

THE PRICE SLASHER!

IF YOU WANT IT - WE'VE GOT IT ..... IF WE HAVEN'T GOT IT - WE'LL FIND IT ...

FRANKLIN ACE ..... CALL

- Color or Black & White
- Apple II compatible
- 64K of RAM
- Upper and lower case
- Typewriter style keyboard
- 12 key numeric pad
- Alpha lock key
- Visicalc keys
- 50 watt power supply
- Built in fan

TEXAS INSTRUMENTS ..... ALL PRODUCTS CALL

ALTOS
- 8000 2 ..... CALL
- 8000-12 ..... CALL

ATARI
- 800 w 48K ..... $619.

COMMODORE
- VIC 20 ..... 219.

DISK DRIVES

HARD DISKS AVAILABLE ..... CALL

RANA SYSTEMS
- Elite I w Controller ..... $429.
- Elite II ..... CALL
- Elite III ..... CALL
- Control Card ..... 99.

MICRO SCI
- A35 w Controller ..... 399.
- A40 w Controller ..... 466.
- A70 w Controller ..... 593.

PRINTERS

OKIDATA
- Microline 80 ..... $ 369.
- Microline 82A ..... 459.
- Microline 83A ..... 749.
- Microline 84 ..... 1144.
- Microline 2410P ..... 2599.

BROTHER
- HR-1 Daisy Wheel - Parallel ..... 889.
- HR-1 Daisy Wheel - Serial ..... 969.
- Forms Tractor ..... 149.

STAR MICRONICS
- GEMINI 10 ..... 429.
- GEMINI 15 ..... CALL

C. ITOH
- Prowriter 8510 AP ..... 499.
- Starwriter F10-40PU ..... 1549.

EPSON ..... CALL

NEC
- 8023 w Tractors ..... 489.
- 3510 ..... 1722.
- 3515 ..... 1755.
- 7710 7730 ..... 2465.
- 7715 ..... 2499.
- 7720 ..... 2699.
- 7725 ..... 2750.

QUME
- 9 45 LTD ..... 2099.
- 9 45 FULL ..... 2199.

IDS
- Micro Prism ..... CALL
- Prism 132 ..... CALL

DIABLO
- 630, RS-232, Daisy Wheel ..... 1995.
- 630 API-Apple, IBM TRS 80 ..... 1795.
- 620 ..... 1239.

MANNESMANN TALLY PRINTERS
- MT 160 L ..... 879.

MONITORS & TERMINALS

USI
- 12" Hi Res Green ..... $139.
- 12" Amber ..... 159.

SANYO
- 12" Black & White ..... 249.
- 12" Green Screen ..... 265.
- 13" Color ..... 465.
- 13" Color RGB ..... 885.

ADDS
- Viewpoint Green Screen ..... 589.
- Viewpoint 60 ..... 695.

HAZELTINE
- Esprit ..... 585.
- Esprit II ..... 649.

BMC USA
- 12" Green ..... 95.
- 12" Hi Res Green ..... 145.
- 14" Color Composite ..... 329.
- 14" RGB Color ..... 339.

AMDEK
- 12" Green ..... 169.
- 13" Color I ..... 379.
- Color II Hi-Res ..... 849.
- Color III RGB Color ..... 475.

TELEVIDEO
- 910 ..... 639.
- 912 ..... 745.
- 925 ..... 825.
- 950 ..... 989.

NEC
- JB 1260 12" Econo Green Hi Res ..... 120.
- JB 1201 12" Green Screen Hi Res ..... 169.
- JC 1201 12" Color ..... 362.
- JC 1203 12" Hi Res Color ..... 799.
- Cable for IBM PC ..... 19.

ACCESSORIES

SORRENTO VALLEY ASSOCIATES
- App-L-cache 256K Memory ..... $995.

SSM
- AS10 Apple Serial I/O Card ..... 129.
- AP10 Apple Parallel I/O Card ..... 75.
- A10-II ..... 164.

TG PRODUCTS
- Game Paddles ..... 28.
- Joy Stick ..... 44.

ORANGE MICRO
- GRAPPLER PLUS ..... 139.

MICROTEK
- Apple Dumpling ..... 129.

KRAFT SYSTEMS
- JOYSTICK ..... 49.

MPC PERIPHERALS
- Bubble Memory ..... NEW 679
- 16K Memory Board for Apple II ..... *SPECIAL* ..... 63.
- 32K Memory Board for Apple II ..... 149.
- Parallel Printer Card for Apple II ..... 72.
- Upper and Lower Case ROM ..... 19.
- PROM-IT, Eprom for the Apple II ..... 99.
- Serial Input/Output Card for Apple II ..... 119.
- 16/32K Expansion Memory Board ..... 125.

M & R ENTERPRISES
- SUP R TERMINAL 80 Column Video Board ..... 269.

PRACTICAL PERIPHERALS
- Microbuffer II 16K for Apple II ..... 239.
- Microbuffer II 32K for Apple II ..... 279.
- 8K Serial Buffer for Epson Printer ..... 129.
- 16K Parallel Interface for Epson Printer ..... 129.

MICROSOFT
- Z-80 Softcard for Apple ..... 249.

MOUNTAIN COMPUTER
- CPS Multifunction for Apple ..... 165.
- The Clock for Apple ..... 235.
- Romplus ..... 119.
- Ramplus 16K for Apple ..... 135.
- Ramplus 32K for Apple ..... 152.
- Music System for Apple ..... 319.
- Rom Writer for Apple ..... 139.

ADVANCE LOGIC
- Z CARD for Apple II ..... 225.

R.H. ELECTRONICS
- ZENER RAY ..... 72.
- SUPER FAN ..... 49.

VERSA COMPUTING
- Versawriter Graphics Tablet ..... 299.

SEATTLE COMPUTER
- 64K RAM + for the IBM PC ..... 385.
- 128K RAM + for the IBM PC ..... 529.
- 256K RAM + for the IBM PC ..... 789.

CALIFORNIA COMPUTER SYSTEMS
- Asynchronous Serial Interface ..... 145.

VIDEX, INC.
- Videoterm ..... 269.
- Softvideo Switch ..... 29.
- Inverse Chip ..... 24.
- Enhancer II ..... 119.

SOFTWARE FOR CP/M

ASHTON-TATE
- dBase II ..... $499.

MICROPRO
- Wordstar ..... CALL
- Mailmerge ..... INFOSTAR CALL ..... CALL
- Calcstar ..... CALL
- Datastar ..... REPORTSTAR CALL ..... CALL
- Supersort ..... CALL
- Spellstar ..... CALL

MICROSOFT
- Fortran 80 ..... 369.
- Macro 80 ..... 149.
- Basic Compiler ..... 309.
- mu/MATH/mu/SIMP 80 ..... 195.
- Cobol 80 ..... 595.
- Basic 80 ..... 279.
- Edit 80 ..... 96.

- mu/LISP/mu/STAR 80 ..... 149.
- Multi Plan ..... *Also Available For Apple ..... 205.

SOFTWARE DIMENSIONS, INC.
- Accounting Plus ..... CALL

FOX & GELLER
- Quickscreen ..... 140.
- Quickcode ..... 225.
- Crosstalk .. MICROSTUF ..... 169.
- Supercalc .. SORCIM ..... 205.
- The Word .. OASIS ..... 75.
- Spellbinder .. LEXISOFT ..... 279.
- T/Maker II .. LIFEBOAT ..... 219.
- Supervyze .. EPIC SOFTWARE ..... 115.
- Condor III .. CONDOR ..... 799.

CALL FOR THIS MONTH'S SPECIALS!!

Note: Apple is a registered trademark of Apple Computer, Inc.
C/PM is a registered trademark of Digital Research.

SOFTWARE FOR IBM

SORCIM
- Supercalc ..... $205.
- SuperWriter ..... 295.
- Spellguard ..... 229.

SELECT INFORMATION SYSTEMS
- SelectWord Processor W/Superspell ..... 369.

VISICORP
- Visicalc 256K Version ..... 209.
- Visitrend/Visipilot ..... 249.
- Visidex ..... 209.
- Visifile ..... 249.
- Desktop Plan I ..... 249.

MICROPRO
- Wordstar ..... LOWEST PRICES ..... CALL
- Mailmerge ..... CALL
- Spellstar ..... CALL

I.U.S.
- Easyspeller ..... 139.
- Easyfiler ..... 289.
- Easywriter II ..... 269.

SOFTWARE DIMENSIONS, INC.
- Accounting Plus ..... CALL

CONTINENTAL SOFTWARE
- The Home Accountant Plus ..... 119.

DENVER SOFTWARE
- EASy (Executive Accounting System) ..... 535.

- Write On ..... DATAMOST ..... 99.
- Condor II ..... CONDOR ..... 449.
- Crosstalk ..... MICROSTUF ..... 165.
- MathMagic ..... ISM ..... 75.
- The Tax Manager .. MICROLAB ..... 195.
- d Base II ..... ASHTON—TATE ..... 499.

SOFTWARE FOR APPLE

BRODERBUND
- Serpentine ..... 29.
- Choplifter ..... 29.

MICROSOFT
- Typing Tutor II ..... $18.
- Adventure ..... 25.
- *Fortran 80 ..... 165.
- A.L.D.S. ..... 100.
- *Basic Compiler ..... 315.
- mu/MATH/mu/SIMP 80 ..... 200.
- Olympic Decathalon ..... 25.
- *Cobol 80 ..... 595.
- M/Sort ..... 156.

- Softcard Premium System ..... 699.
- Time Manager ..... 119.

SELECT INFORMATION SYSTEMS
- SelectWord Processor ..... 389.

VISICORP
- Visicalc ..... 209.
- Visiterm ..... 85.
- Visiplot ..... 169.
- Visidex ..... 209.
- Visitrend/Visiplot ..... 249.
- Visifile ..... 209.
- Visischedule ..... 249.

- Desktop Plan II ..... 209.

MICROPRO
- *Calcstar ..... INFOSTAR ..... CALL
- *Datastar ..... REPORTSTAR ..... CALL
- *Supersort ..... CALL
- *Wordstar ..... LOWEST PRICES ..... CALL
- *Mailmerge ..... CALL
- *Spellstar ..... CALL

SORCIM
- Spellguard ..... 229.

SOUTHEASTERN SOFTWARE
- Data Caoture 4.0 ..... 58.

EDU-WARE ..... CALL
- Step by Step ..... PROGRAM DESIGN ..... 59.
- Datafax ..... LINK SYSTEMS ..... 149.
- dBase II ..... ASHTON-TATE ..... 499.

CALL FOR MORE APPLE SOFTWARE!!

MODEMS

HAYES MICROCOMPUTER PRODUCTS
- Smartmodem ..... $229.
- Smartmodem 1200 ..... 599.
- Micromodem II ..... 289.
- Micromodem 100 ..... 325.
- Chronograph ..... 199.

NOVATION
- Cat ..... 169.
- D-Cat ..... 185.
- Auto Cat ..... 293.
- Apple Cat II ..... 309.
- Apple Cat II—212 ..... CALL

WE ACCEPT ● MONEY ORDER ● C.O.D. ● CASHIERS or CERTIFIED CHECK ● PERSONAL CHECK (allow 10 days to clear) ● BANK WIRE TRANSFERS ● VISA MASTERCARD (add 2%)

Add 3% for shipping, handling & insurance ($5 min.) Calif. residents add 6% tax. All equipment is new, comes with manufacturers guarantees PLUS we guarantee it for 30 days and pay shipping charges on any returns. All equipment subject to price change & availability without notice. Check quantity discounts.



mail comp

9434 Chesapeake Drive
San Diego, CA 92123

ORDERS ONLY: 800-752-1341
CALIFORNIA ORDERS: 619-277-8002
INFORMATION: 619-277-8006

Circle 254 on Inquiry card.

www.americanradiohistory.com

Listing 2: *Sample program written in ROTERP. The robot is commanded to scan the room for a light source, determine its distance, and display the information.*

```
0000    12    0001    START    RIGHT          1
0003    2B    01               SCAN           A
0005    2E    01               TEST           A
0007    42    FFF8             JUMPEQ         START
0010    30    02               COUNT FORWARD  B
0012    21    02               REVERSE        B
0014    28    02               DISPLAY        B
0016    00                     HALT
```


Martin Marietta Aerospace

Data Processing Opportunities

Martin Marietta Aerospace, NASA's prime Contractor for the Space Shuttle External Tank has immediate openings for Data Processing professionals. Because we actually manufacture the external tank, you'll get to see the actual results of your efforts.

•APPLICATION EXPERIENCE
Shop floor control, Scheduling, Manufacturing, Inventory, Purchasing, Configuration Management, Quality Engineering.

•DATA BASE OPENINGS
Analyst, Design, Administrators with above hardware, software and applications experience.

COMPUTER PROGRAMMER/ ANALYSTS
Immediate opportunities exist for individuals experienced in:

•UNIVAC 1100
ASC11 COBOL
DMS 1100
DDL, SDDL, DMU
DML, QLP
DPS 1100, TIP
D/B Editor

These opportunities exist at our Michoud Assembly Facility located in suburban East New Orleans.

Qualified candidates interested in learning more about these opportunities at Martin Marietta should forward resumes, including salary history to Martin Marietta Aerospace, Denver Glazier, BYTE-383, P.O. Box 29304, New Orleans, Louisiana 70189. We are an equal opportunity employer, m/f/h.

MARTIN MARIETTA

reader"). Imagine how much more difficult it would be in assembly language!

Let's try programming the robot to survey a room. An array can be declared to store distances and positions, data that can be acquired during the robot's trips back and forth throughout the room until it is familiar with its surroundings.

Even this simple robot can be taught to wake you when the sun comes up. Just give it explicit instructions to go to an eastern bedroom window and then let the program loop patiently until light appears. At dawn the robot will retrace its steps to your bed and beep insistently.

The Implementation

The implementation of ROTERP is easier than I would have expected. This version fits into a single 2K-byte 2716 EPROM (erasable programmable read-only memory). It is also fairly memory-efficient: the memory required for the registers, temporary locations, and a 10-deep nested call stack is only 128 bytes, leaving the rest of available memory for program storage. (I used a Motorola MEK 6800 D2 microprocessor kit to arrive at these figures.)

Figure 2 shows the modules that need to be written to form the complete interpreter. The first module allocates some memory for all of the 16-bit processor registers, some temporary storage for use by the interpreter, and enough memory for a subroutine call stack, which must accommodate as many nested calls as might be reasonably needed. You can use 1 byte to allocate as many as 256 general-purpose registers. The tradeoff is simply between memory used by ROTERP and the amount of memory left for program storage.

The initialization module is entered after the program is placed into memory. First it places the fixed starting address of the program into the program counter, sets up any interrupt-service-routine vectors that are needed, and initializes any device that needs it. Next it calls a subroutine that clears all of the general-purpose registers and places some default values into the special-purpose reg-

www.americanradiohistory.com

OVERBUILT.

Now you can afford to be choosy. With the Toshiba P1350 dot matrix printer. Choose quality when you want it. Speed when you need it. At a price you'd expect to pay for just one or the other.

For speed, choose the draft mode. 160 CPS. About a page a minute. For quality, choose the LetterPerfect mode. 100 CPS. About twice as fast as a daisy wheel. Or choose the graphics mode at 192 CPS.

The technological breakthrough that makes it possible: Toshiba's fine-wire, overlapping, 24-pin, impact print head. For incredibly high 180 dots per inch density with a single pass.

More choices: variable pitches of 12 CPI or 10 CPI. Three character fonts. Variable line spacing. Single sheet paper or continuous forms, from 5" to 15" wide, with up to four copies. Friction feed, pin feed tractor or Toshiba's ultra-reliable sheet feeder. And a choice of interfacing: parallel or serial.

Toshiba P1350. It gives you the choices you want. The quality you expect. The reliability you need.

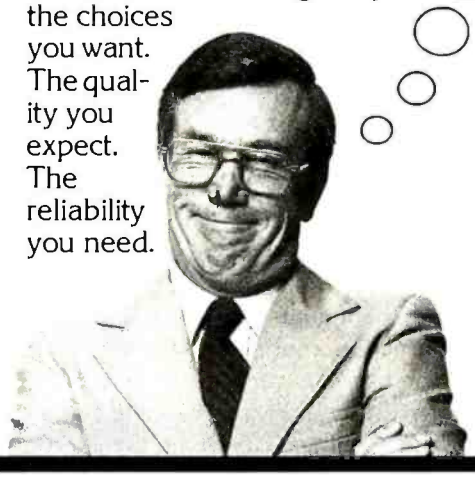



The precision you require. The low-maintenance long life you like. The price you love. With versatility and performance that's been proven in more than 7,000 installations.

When it comes to printers, you really have no choice. There's only the Toshiba P1350. Write for the details on everything it can do for you. Toshiba America, Inc., Information Systems Division, 2441 Michelle Drive, Tustin, CA 92680.

Better yet, call toll-free...now!

1-800-648-5000

Ask for operator #198
In Nevada, call (702) 329-9411

UNDERESTIMATED.

Circle 428 on Inquiry card.

www.americanradiohistory.com

Everybody's Logic Analyzer

12 Channels
16 Words

$379

A logic probe and oscilloscope are no longer adequate for analysis in today's digital world. For testing or debugging microcomputer or other digital logic circuits you need a real logic analyzer.

The LA-12 captures, stores and displays TTL and LSTTL digital data so that the instantaneous meaning of the data stream (e.g. data value, ASCII code, address) can be understood and analyzed long after the actual events have passed.

■ Easy to Use ■ 10 MHz ■ Clock Qualifier ■ Trigger input ■ 3 Trigger Qualifiers ■ Built-in LED Display — No oscilloscope needed ■ Compact ■ Expandable ■ Low Cost

30 day trial
Purchase an LA-12, use it, and if you are not completely satisfied, return it within 30 days and receive a full refund.

Free Offer
If you order within 45 days, *and mention this magazine*, you will receive a $49.95 input cable free with each LA-12 ordered.

Save $28.95
In addition, if you enclose payment with your order you can deduct 5% and we will pay shipping charges.

All prices are in US dollars for 120VAC.

To order in the Continental US call

TOLL FREE
1-(800) 547-5995 EXT. 195

Connecticut microComputer, Inc.
36 Del Mar Drive, Brookfield, CT 06804
(203) 775-4595 TWX: 710-456-0052

Q	Description	Price	Total
	Logic Analyzer	$379.00	
	Input Cable	49.95	
	20 Color-coded microclips	44.95	
Connecticut residents add 7½% sales tax			
	Shipping & Handling	$10.00	
	Total		

☐ Company purchase order enclosed (Rated Firms only)
☐ Check ☐ VISA ☐ MasterCard

Acct. No. _____
Signature _____ Exp. Date ____
Name (Print) _____
Address _____
_____
City _____
State _____ Zip _____
Dealer inquiries invited

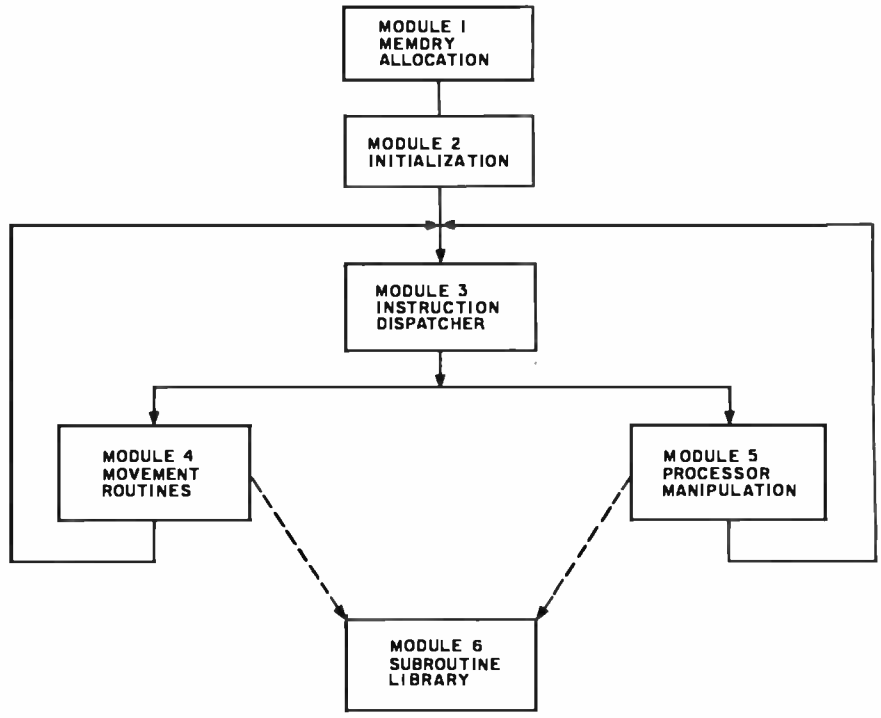

Figure 2: *Block diagram of ROTERP modules.*

isters. ROTERP uses SECONDS, FEET, and SLOW as defaults. This "clear and default" function is expressed as a subroutine because it is also called by the ZERO instruction.

Execution then continues into the instruction dispatch module, which contains a jump table used to pass control to the routine that executes the current instruction. If any invalid op code is executed, control is transferred to a routine that displays an error code and jumps the SBC monitor. This jump table is 256 bytes long because all op codes greater than 7F are currently treated as invalid instructions. If you want all 256 possible instructions, the jump table size would increase to 512 bytes.

The next section, which contains all the routines that carry out each instruction, is divided into two modules: one for execution of movement instructions and one for register-manipulation instructions. The instruction routines in the movement module are very dependent on the hardware scheme that controls the direction and speed of the motors. The motors can be interrupt-driven or controlled with timing loops in the manner of stepping motors and simple relay-operated DC motors.

All of the movement routines have many functions in common. First, they get the operands, translate them from a register designation to a working number as needed, and assign a temporary location to each working number. A scaling routine then translates the number of distance or time units into an absolute number expected by the motor handler. The op code itself serves as a direction indicator.

Next, the motor handler is called to perform the motion. And the last function every instruction performs is to add the length of the instruction to the program counter so that it points to the next instruction to be executed. Control is then passed back to the instruction dispatcher.

Because many of the instructions must perform common functions, the functions are expressed as subroutines and placed in the last module, the subroutine library. The subroutine library also includes routines that do common register operations like 16-bit addition, subtraction, multiplication, and division. The library is designed not only to save duplication of code but to permit the easy addition of new instructions.

To add a new instruction, you

www.americanradiohistory.com

Lyco Computer Marketing & Consultants

TO ORDER CALL US

TOLL FREE 800-233-8760

In PA 1-717-398-4079

SPECIAL PURCHASE

810 DISK DRIVE.....$419.
NEC 8023 PRINTER... $449.
PERCOM AT-88 DISK... $395.

FREE

DESIGNER TEE-SHIRT with PURCHASE of

800 48K RAM ... $489.00

ATARI®

A Warner Communications Company

ATARI HARDWARE

410 CASSETTE RECORDER	$ 75.00
825 PRINTER	$585.00
830 PHONE MODEM	$149.00
850 INTERFACE	$164.00

PACKAGES

CX482 EDUCATOR	$119.00
CX483 PROGRAMMER	$54.00
CX488 COMMUNICATOR	$219.00
CX419 BOOKKEEPER	$189.00
KX7104 ENTERTAINER	$69.00

SOFTWARE

CXL4012 MISSILE COMMAND	$28.75
CXL4013 ASTEROID	$28.75
CXL4020 CENTIPEDE	$32.75
CXL4022 PACMAN	$32.75
CXL4011 STAR RAIDER	$34.75
CXL4004 BASKETBALL	$26.75
CXL4006 SUPER BREAKOUT	$28.75
CXL4008 SPACE INVADER	$28.75
CX8130 CAVERNS OF MARS	$31.75
CX4108 HANGMAN	$12.75
CX4102 KINGDOM	$12.75
CX4112 STATES & CAPITALS	$12.75
CX4114 EUROPEAN COUNTRIES	$12.75
CX4109 GRAPHIT	$16.75
CX4121 ENERGY CZAR	$12.75
CX4123 SCRAM	$19.75
CX4101 PROGRAMMING I	$19.75
CX4106 PROGRAMMING II	$22.75
CX4117 PROGRAMMING III	$22.75
GLAXIAN	$32.75
DEFENDER	$32.75
JUGGLES	$23.75
SPEED READING	$55.75
CXL4007 MUSIC COMPOSER	$33.75
CXL4002 ATARI BASIC	$45.75
CX8126 MICROSOFT BASIC	$65.75
CXL4003 ASSEMBLER EDITOR	$45.75
CX8126 MACRO ASSEMBLER	$69.75
CXL4018 PILOT HOME	$65.75
CX405 PILOT EDUCATOR	$99.75
CX415 HOME FILING MANAGER	$41.75
CX414 BOOKKEEPER	$119.75

NEW RELEASES

ATARI 1200 COMPUTER

THIRD PARTY SOFTWARE

EASTERN FRONT 1941	$25.50
OUTLAW/HOWITZER	$15.50
WIZARD of WAR	$31.00
GORF	$31.00
FROGGER	$26.00
CHOP LIFTER	$27.75
APPLE PANIC	$23.75
PREPPIE	$19.95
STAR WARRIOR	$28.00
CRUSH,CRUMBLE,&CHOMP	$23.00
SHOOTING GALLERY	$19.95
VIDEO MATH FLASH	$12.00
MY FIRST ALPHABET	$25.50
BAHA BUGGIES	$24.95
TEMPLE of ASPHAI	$27.95
UPPER REACHES of ASPHAI	$15.00
TRACK ATTACK	$23.00
STAR BLAZER	$25.00
LABYRINTH	$23.00
SEA FOX	$23.00
POOL 1.5	$26.95
SPEEDWAY BLAST (ROM)	$29.95

INHOME

400 KEY BOARD	$99.75
PROTECTOR	$24.95
NAUTILUS	$24.95
SLIME	$24.95
SUBMARINE COMMANDER (ROM)	$36.95
JUMBO JET PILOT (ROM)	$36.95
SOCCER (ROM)	$36.95
KICKBACK (football ROM)	$36.95

PRINTERS

PROWRITER I	$479.00
PROWRITER II	$ CALL
OKIDATA 82A	$419.00
OKIDATA 83A	$639.00
OKIDATA 84	$1029.00
OKIDATA TRACTOR	$63.00
NEC 8023A	$449.00
SMITH CORONA	$589.00
STARWRITER	$1475.00

BUSINESS SOFTWARE

ATARI WORD PROCESSING	$109.00
LETTER PERFECT (ROM)	$149.00
LETTER PERFECT (disc)	$129.00
TEXT WIZZARD	$ 89.00
DATA PERFECT	$ 75.00
VISICALC	$169.00
DATASAM/65	$125.00

JOYSTICKS

ATARI CX-40	$18.00
LESTICK	$34.00
WICO COMMAND CONTROL	$23.75
WICO RED BALL	$26.75
WICO TRACK BALL	$54.75
STICK STAND	$ 6.75

Book of ATARI Software

(346 pages) .. $19.95

PERCOM

SINGLE DRIVE (SD)	$399.00
SINGLE DRIVE (DD)	$549.00
DUAL DRIVE (DD)	$869.00
DUAL HEAD (DD)	$669.00

POLICY

In-Stock items shipped within 24 hours of order. Personal checks require four weeks clearance before shipping. No deposit for COD orders. PA residents add sales tax. All products subject to availability and price change. Advertised prices show 4% discount offered for cash. Add 4% for Mastercard and Visa.

Circle 252 on Inquiry card.

TO ORDER
CALL TOLL FREE
800-233-8760
In PA 1-717-398-4079
or send order to
Lyco Computer
P.O. Box 5088
Jersey Shore, PA 17740

www.americanradiohistory.com

simply place the new entry in the jump table and call the appropriate "fetch operand" routines. If the instruction is in the register-manipulation group, you can call many of the existing subroutines in the library to reduce the amount of new code that needs to be written. (If the instruction involves the use of an entirely new device, you must write a handler for that device, as you would in any case.) Finally, an existing routine increments the program counter and jumps back to the instruction dispatcher.

Extensions

If you find yourself using a particular sequence of instructions repeatedly, a single new instruction will make your program both shorter and easier to write. And the processor is not limited to expanding new instructions: a new device may be complex enough to warrant the use of a new special-purpose register. If you expect to use many different arrays, adding new array registers is only a matter of allocating space for them and assigning new op codes that call the same subroutines that the present ARRAY instruction uses.

The simple architecture and instruction set presented here should not be considered complete or taken for the optimum design of a pseudo-processor for robots. Each design should be tailored individually to the kinds of experiments that you expect to do. For example, if you want a link to a host computer, the instruction dispatch module can be modified to receive instructions from a serial-line interface instead of reading them from memory. Two other options exist: the processor can be oriented around 32-bit registers if more precision is desired, or it can use 8-bit registers if less precision is needed. Expressing movement routines in terms of relative polar or Cartesian coordinates might be more desirable.

For maximum flexibility, one interpreter could include all of these features. If one byte does not sufficiently represent all of the different instructions, a 16-bit op code could be used. Better yet, a single instruction that changes jump tables would allow you to switch between whole instruction sets. The ultimate step forward, though, would be a translator that would produce running code from the instruction mnemonics. This translator would resolve symbolic references and might be the precursor of even higher-level "macro" statements of behavior. New language constructs, such as those found in LISP, might be implemented for ease of integrating the work being done in other areas of artificial intelligence.

Summary

ROTERP illustrates how a pseudo-processor can control the increasing number of devices that can be incorporated into an experimental robot. With careful planning, you will be able to improve and expand the interpreter without difficulty. By tailoring the robot's processor to the kind of behavior it will perform, the robot becomes a much easier tool to work with.■

ALL 1/3 SOFTWARE off

Software Catalog. FREE. Get the lowest price on *every* software program you need. 1/3 off list price *guaranteed*. And look what else you get from ITM:

Unlimited Consultation! ITM's consultants work with an amazing database indexed with over 300 software selection criteria—plus thousands of in-depth product reviews. You'll get the programs that are right for you. Quickly. Easily. It's the most sophisticated consultation service in the industry. Call toll free!

Over 2,000 programs to choose from. Hundreds added every month. All categories. All formats.

See any program demonstrated. Order any non-entertainment program for *a risk-free, thirty-day trial.* Full refund if not completely satisfied.

No minimum order. Buy just one program if you like. Quick shipments.

All this, and more, is yours for an annual fee of $100. Call ITM now. Or, mail the coupon today and receive our FREE Software Catalog. Save hundreds—even thousands—of dollars on all of your software purchases with ITM.

American Express, Visa, or MasterCard honored.
Call toll-free today.
(800) 334-3404
In California (415) 284-7540

Software Catalog. FREE. Byte 383

☐ YES. Send complete information for my review. Please include a free copy of ITM's Software Catalog.

NAME _____
COMPANY NAME _____
ADDRESS _____
CITY/STATE/ZIP _____
PHONE _____
☐ Individual ☐ Dealer ☐ Consultant ☐ Company

ITM
Software Division
We make software buying simple.
Attn: Stevan Cloudtree
936 Dewing Ave., Suite E
Lafayette, CA 94549-4292
(800) 334-3404 or
(415) 284-7540

Circle 204 on Inquiry card.

www.americanradiohistory.com

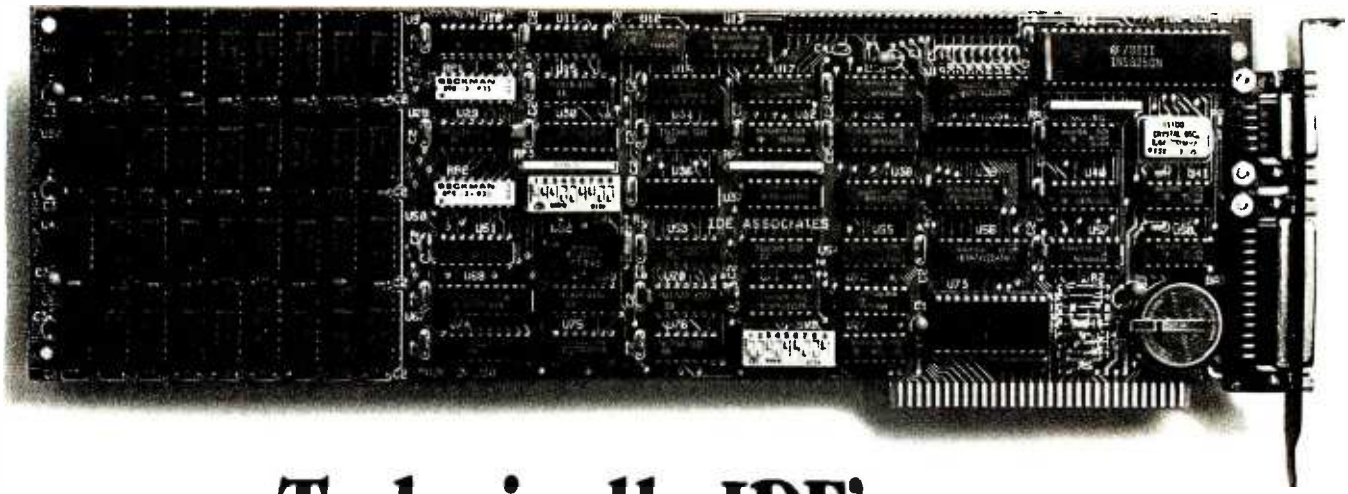

Technically, IDE's new Combination Board for the IBM PC is a knockout.

It beats the knockout problem.

IDE's new Combination Board allows you to cable both serial *and* parallel interfaces from the back of the board itself.

So even if your IBM PC doesn't have a knockout at the back, you can now interface printers, disks, or communications devices. Without any troublesome jury rigging, without wasting expansion slots, and with the unit's protective cover still in place.

It's a technical knockout.

The interfacing innovations are only the beginning.

For the first time, you can get a Winchester disk drive interface on a combination board. Or you can use the same interface for a printer.

Only the IDE Combination Board gives you this capability.

And that's only one of 3 options IDE offers. You can also add a serial interface (RS232C Cable Adapter included) and/or clock/calendar with battery backup.

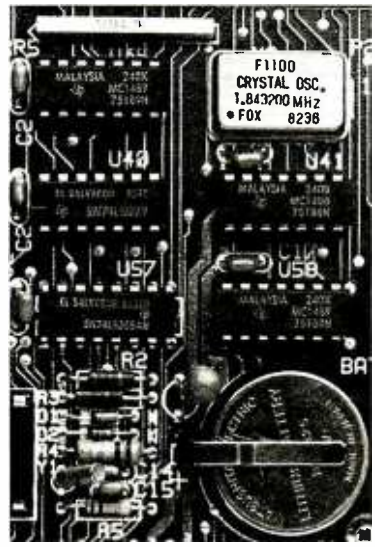

The price is a very nice touch.

To really be knocked out by the IDE Combination Board, just take a look at our price structure.

You buy only the options you want – so you never have to pay for something you don't need.

And with IDE's helpful upgrade policy, you can trade up your board for one with more memory or options. For very little money.

Pricing table

Memory only:	One option:
64K $275	Add $75
128K $385	Two options: Add $120
192K $485	Three options: Add $150
256K $575	

A Combination Board this advanced deserves a lot behind it.

IDE backs up its new Combination Board with a one-year warranty...not just 90 days.

It's available for immediate delivery, and installation is free in major metropolitan areas.

So call us now to order your Combination Board. We'll answer any questions you have, and give you the name of your nearest IDE dealer.

He'll show you the new IDE Combination Board and the whole line of IDE products: Winchester disk drives, memory boards, printer spooler software, and disk-emulation software.

They're all technical knockouts.

1-800-257-5027
(in MA call (617) 272-7360)

IDE Associates
44 Mall Road, Burlington, MA 01803

Circle 206 on Inquiry card.

www.americanradiohistory.com

NOW ONLY $1590

2590

We doubled our production and lowered your price.

Full size smar terminal with detachable keyboard

4MHz, Z80A™ CPU
64K RAM main memory
200 Kbyte 5¼" floppy disk
(Osborne, Xerox, IBM formats)
Two serial ports

Complete sof ware package, including:

CP/M Operating System
WordStar® Word Processing
Microsoft® BASIC 80
NorthStar compatible BAZIC®
Spelling Checker
Electronic Spreadsheet

www.americanradiohistory.com

You can't buy more computer for less.

$1790 is the total retail price of the complete Micro Decision™ System you see in this ad. And that includes the computer with a disk drive, a full size smart terminal, and over $1800 worth of software. No other business computer available today offers so much for so little (a comparable Apple system costs almost twice as much).

The Micro Decision is a bargain any way you look at it. The computer alone, with all that software and one disk drive is only $1195. If you want to add another disk drive, the price is still great: just $1545. And the smart terminal is only $595. Retail.

As for the microcomputer itself, our Micro Decision includes a 64K CP/M® 2.2 Operating System. That's the industry standard operating system that gives you access to over 2000 business programs (available right now—right off the shelf).

If you'd like more information, or to find out about our substantial quantity discounts, call us at (415) 430-1970. We'll introduce you to more Morrow. And less price.

LOOK TO MORROW FOR ANSWERS TODAY

MORROW DESIGNS

600 McCormick St.
San Leandro, CA 94577
(415) 430-1970

Circle 296 on inquiry card.

CP/M is a registered trademark of Digital Research, Inc.
Z80A is a trademark of Zilog, Inc.
WordStar is a registered trademark of MicroPro, Inc.
Microsoft is a registered trademark of Microsoft Corporation
BAZIC is a registered trademark of Micro Mike's, Inc.
Micro Decision Is a trademark of Morrow Designs

www.americanradiohistory.com

Using SOUND Arguments for High-Precision RTTY

How to generate radioteletype audio frequencies from an Atari 800.

Scott Persson
4719 Valley St.
Omaha, NE 68106

This article focuses on the audio capabilities of the Atari 800 microcomputer. These include synthesized speech, automatic Touch-Tone (a registered trademark of the Bell System) dialing, Morse-code generation, and many more. A direct use of the Atari's sound capabilities may be demonstrated by the ease with which it will generate the proper sound frequencies for the transmission of amateur radioteletype. With only a shielded cable between the Atari's monitor jack and the VHF (very high frequency) radio as interface, a completely new method of "interfaceless" data transmission for microcomputers is born. Previously, microcomputers had been sending radioteletype by controlling expensive outboard tone generators, but with the Atari 800's four built-in tone generators, who needs the expense of an interface?

With the Atari 800's four built-in tone generators, who needs the expense of an interface?

Introduction to RTTY

Amateur radioteletype (RTTY) signals are composed of two precise audio-frequency tones which alternate in patterns to produce character combinations, usually in the five-level Baudot or Murray code. The higher of the two tones is the *space* tone and the lower is the *mark* tone. The difference in frequency between the space and the mark tones is the *shift*. Radioteletype normally uses two shifts: the mark tone for both has been standardized at 2125 Hz (hertz, or cycles per second). For a 170-Hz shift, the space tone is 2295 Hz (2125 + 170); for an 850-Hz shift, the space tone is 2975 Hz (2125 + 850). The Atari 800 will generate some of these frequencies.

Simple Audio-Frequency Generation

The sound generators within the Atari are clocked at 63.921 kHz (kilohertz). Each generator is associated with a memory location and the value within that location is constantly being decremented from 255 to 0 at the clock frequency. The decrement interval is determined by the Atari BASIC SOUND statement parameters. The frequency of the audio that is produced is determined by the number of times per second that the corresponding memory location counts down to 0. The exact frequency of a SOUND statement can be determined with the following equation:

$$F_{OUT} = \frac{F_{IN}}{2N} \qquad (1)$$

where F_{OUT} is the frequency actually obtained from the computer, F_{IN} is 63,921 Hz, and N is the second SOUND command parameter (0 to 255) plus 1.

For example, N would equal 14 + 1, or 15, in the command "SOUND 0,14,10,15." We can compute the exact frequency as follows:

$$F_{OUT} = \frac{F_{IN}}{2N}$$

$$= \frac{63,921}{2(15)}$$

www.americanradiohistory.com

TCS Heart of TEXAS COMPUTER SYSTEMS

LEADER in MAIL ORDER DISCOUNTS!

800 433-5184

Texas 817/274-5625

IBM Personal Computer

INTERNAL DISKS FOR IBM
Complete IBM Disk Systems ..... $CALL
Tandon Internal Disk .. single sided 160k
Tandon Internal Disk . double sided 320k

HARD DISKS FOR IBM
Complete 5 meg. Systems ... from $1588
Multi-computer Network Systems available

MONITORS FOR IBM
Green - hi resolution ..... from $89
atching PGS Color - super hi res . $Call

QUADBOARD FOR IBM
Includes 64k to 256k additional Memory, Serial & Parallel Port and Calendar Clock

ADDITIONAL MEMORY FOR IBM
16k Chips ..... each $2
64k Chips ..... $Call

PRINTER FOR IBM
Epson, Star & other matrix printers . $Call
NEC 3550 Spinwriter IBM version .. $Call

DAVONG

DAVONG HARD DISK
FOR APPLE II AND APPLE III
5mg----------$1550
12mg----------$2000
Specify External/Internal

APPLE

First DISK DRIVE w/controller, DOS 3.3, cables and manual $419
Second DISK DRIVE with cable $319
APPLE to EPSON card and cable

Z 80 Card ..... $Call
RAM Card ..... $Call
Printer Interface Cards ..... $Call
Graphic Printer Interface Ca d $139
Graphic Spooler Interface Card/16k to 64k

TANDON DRIVES

TCS DRIVE CABINET is industrial grade heavy guage metal, safely fused, and comes with gold plated external connector with extender cable.

1 DRIVE in Cabinet

40 track single sided $249
80 track (dual sided 40 track) $329
160 track (dual sided 80 track) $449

1 DRIVE/Double Cabinet

40 track single sided $289
80 track (dual sided 40 track) $369
160 track (dual sided 80 track) $499

2 DRIVES/Double Cabinet

40 track single sided $489
80 track (dual sided 40 tracks) $639
160 track (dual sided 80 tracks) $849

Drives in cabinets come assembled/tested with power supply. Order cable separately.

BARE DRIVES ONLY

40 track single sided ..... $CALL
80 track (dual sided 40 track) .... $CALL
160 track (dual sided 80 track) ... $CALL
8 inch Slimline sgl/dbl sided ..... $CALL
Winchester hard drives 5-30 meg . $CALL

CORVUS HARD DISK

CORVUS HARD DISKS

Call for '83 prices - lowest anywhere

Add 5, 10 or 20 megabytes of storage to your TRS80, IBM, Apple, Atari, Heath, Zenith, Intertec, S-100 and many others. One or several computers can share a hard disk. Get simultaneous access to data for multiple users. AVAILABLE NOW at SUPER SAVINGS.

PRINTERS

TCS has the LOWEST PRICES on IN STOCK PRINTERS!

MATRIX PRINTERS

STAR GEMINI
Better than Epson and costs less!
100 cps .. 180 day warranty
Bit Image AND Block Graphics
Friction Feed and Pin Feed paper

STAR GEMINI 10 (10 inch carriage) $Call
STAR GEMINI 15 (15 inch carriage) $Call
C.ITOH 8510 / TEC / PMC ..... $Call
DMP 100 ..... $349
DMP 200 ..... $689
DMP 400 ..... $1029
DMP 500 ..... $1584
ANADEX 9501-A $1395
CENTRONICS 352 / 353 ..... $Call
OKIDATA printers .. $Call for Low Prices

LETTER QUALITY PRINTERS

C.ITOH F-10 (40 cps) $1595
DAISY WHEEL II (RS) $1695
NEC 3510 / 3530 / 3550 ..... $Call
NEC 7710 / 7730 ..... $Call
SMITH CORONA TP-1 ..... $599
BROTHER / COMREX $829

EPSON PRINTERS

EPSON MX 80 ..... $CALL
EPSON MX 80 FT ..... $CALL
EPSON MX 100 FT ..... $CALL

GRAPHTRAX PLUS come free in EPSONS

Cables and interfaces available for most popular computers

For fast, efficient service **Heart of** we can air freight from Dallas

TEXAS COMPUTER SYSTEMS

P.O. Box 1327 Arlington, Texas 76004-1327

TEXAS ORDERS 817/274-5625

TECHNICAL ASSISTANCE 817/274-9221
ORDER STATUS 817/277-1913
TELEX/TWX/Easylink ELN 62100790

★ **800 433-5184**

No tax out of state. Texans add 5%. Prices subject to change at any time.

TRS-80

TCS MODEL III 48k 2 DISK

Systems come with 180 day TCS limited warranty.

$1695

With standard 40 track double density drives. Over 340,000 bytes. Includes TDOS.

$1995

With 2 dual headed 40 track dbl.density drives. Over 730,000 bytes. Includes DOSPLUS 3.4 ($150 value)

Fully assembled and tested systems that are software compatible and functionally identical to Radio Shack units sold at computer stores for $hundreds more.

- CONTROLLER BOARDS are high quality double sided epoxy boards with gold plated contacts.
- POWER SUPPLY is the finest switching type available.
- MOUNTING HARDWARE includes power and data cables.
- DISK DRIVES are Tandon, the same ones used by Radio Shack . . . 40 track, double density, with a 5 millisecond stepping rate.

TCS MODEL III DISK EXPANSION KITS

1 Controller, Power Supply, Mounting Hardware & Instructions $279
2 Controller, Power Supply, Hardware & one 40 track Tandon drive $478
3 Controller, Power Supply, Hardware, two 40 track Tandon drives, 32k memory (everything you need for 2 drive 48k upgrade) $677
3a Kit 3 but with two 80 track drives (dual sided 40s) $879
3b Kit 3 but with two 160 track drives (dual sided 80s) $1099

MODEL III SYSTEMS

Original 90 day manufacturer's warranty.

MODEL III 4k $598
MODEL III 16k ..... $Call
MODEL III 32k ..... $Call
MODEL III 48k ..... $Call
MODEL III 48k 2 Drive RS232 ..... $Call

TCS MODEL III Systems use original RS hardware and quality TCS memory. 180 day limited warranty.

TCS MODEL III 16k ..... $Call
TCS MODEL III 32k $798
TCS MODEL III 48k $628

Green or Amber Langley Sinclair CRT for your customized Model III ..... $Call

COLOR COMPUTER

Original 90 day manufacturer's warranty.

COLOR COMPUTER 16k $249
COLOR COMPUTER 16k ext $335
COLOR COMPUTER 32k ext ..... $Call
COLOR COMPUTER DISK 0 ..... $479
COLOR COMPUTER DISK 1 ..... $349

TCS COLOR COMPUTERS use original RS hardware & TCS memory. 180 day warranty.

TCS COLOR COMPUTER 32k ext .. $379
TCS COLOR COMPUTER DISK 0 .. $449
TCS COLOR COMPUTER DISK 1 .. $249
TCS 32k MEMORY $79

Model II -- **Model 12** -- Model 16 -- $CALL

Ask about our TCS Special M12, 2 drive - SAVE $$$$
TCS is an authorized TRS-80 dealer F701 in Brady, Texas

DEALER INQUIRIES invited on all TCS MODEL III Systems and Kits

CUSTOM SOFTWARE FROM TCS

BTREE Scratchpad $39.95
BTREE Library $39.95
BTREE Mail List $49.95

TCS Exclusive THE PRODUCER $149.95

The ultimate solution in creating your own custom software. If you're in a jam and can't find a program to fit your needs, use this fast and simple Program Development System to tailor make a solution to your problem. Custom design your own screen format with complete control over the number of characters assigned to each field. Fully view and edit all fields at all times. Create a B-Tree structured file allowing you to access data rapidly and without sorting. One key access to user-designed self-help or prompt information. Expand your program to support up to 8 calculations for each data field. AND MUCH MUCH MORE.

This system comes complete with its own Disk Operating System. It will make you a master of your software needs without hiring a programmer. Or if you are a programmer, this system will save you hundreds of hours in design work for your clients. Saving time is saving money!

WRITE FOR FREE BROCHURE ON TCS PROGRAM GENERATOR

www.americanradiohistory.com

Circle 175 on Inquiry card.

CP/M GRAPHICS SOFTWARE

PLOTWARE-z

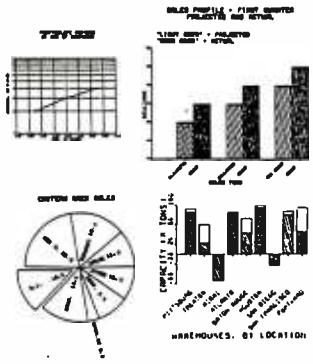

On ALTOS, APPLE, OSBORNE, ZENITH, and most others.

THE MOST COMPLETE:
Use THREE ways:
1. "MENU" GRAPHICS (easy, friendly)
2. "COMMAND FILES" (powerful, flexible)
3. "COMPILER LINKED" (Fortran, etc.)

Use on: most CRT's, dot matrix printers, plotters, word processing printers

THE MOST PROVEN:
2 years in the field

THE MOST IMPLEMENTED:
1. 8 bit and 16 bit machines
2. USER MODIFIABLE
3. many applications programs

$399 complete
$35 manual only
VISA, MC, C.O.D., CHECK, M.O.

THE ENERCOMP COMPANY

P.O. Box 28014
Lakewood, Colorado 80228
(303) 988-1648

Also Available Through

WESTICO
The Software Express Service
25 Van Zant Street • Norwalk, Connecticut 06855
(203)853-6880 • Telex 643788
and selected dealers.

BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0

Bit	Function
7	Not discussed.
6	Clock Generator 1 with 1.789790 MHz, instead of 63.9210 kHz.
5	Clock Generator 3 with 1.789790 MHz, instead of 63.9210 kHz.
4	Clock Generator 2 with Generator 1, instead of 63.9210 kHz.
3	Clock Generator 4 with Generator 3, instead of 63.9210 kHz.
2	Not discussed.
1	Not discussed.
0	Change normal clock frequency of 63.9210 kHz to 15.6999 kHz.

Figure 1: *The 1-byte audio-control register (AUDCTL) shown as bit 0 through bit 7. AUDCTL is used to link generators together and to increase the clock rate.*

$$= \frac{63{,}921}{30}$$

$$= 2130.69 \text{ Hz}$$

This result is fairly close to our mark tone of 2125 Hz. In fact, this tone works just fine for radioteletype. The space tone of 2295 Hz used in 170-Hz shift can be approximated by making N equal 13 to get 2282.89 Hz. I used this combination in my teletypewriter program (see listing 1) for several months until the local hams converted to an 850-Hz shift (2975 Hz). In order to generate 2975 Hz, you must make N equal 10.74, an impossibility because the SOUND statement rounds all arguments into integers. Thus, 10.74 becomes 10, which yields a frequency of 3196 Hz.

Complex Audio-Frequency Generation

High-precision sound generation is possible because the Atari's designers allow you to *link* two of the four sound generators together, so you're not limited to an 8-bit integer number. Thus, the range of the SOUND parameter can be expanded from 0 through 255 (0 through FF hexadecimal) to 0 through 65,535 (0 through FFFF hexadecimal). This means passing the generators 16 bits of information, rather than 8 bits. To do so, you cannot use the SOUND statement; all instructions and information passed to the generators must be entered directly into memory using the POKE statement.

To link the generators, you must become somewhat familiar with AUDCTL, the audio-control register (see figure 1). AUDCTL is located at memory address 53,768 (D208 hexadecimal) and writes data into the audio-mode control register. In order to link generators 1 and 2, bit 4 must be a 1; to link generators 3 and 4, bit 3 must be a 1. These bits are turned on by entering into the AUDCTL register a decimal number which is the sum of the powers of 2 that correspond to the bits you want turned on. For example, to turn on bits 3 and 4, add 2^3 and 2^4 (8 + 16) to get 24, and place that value into AUDCTL with the POKE statement.

The added audio-frequency precision requires the use of a faster clock rate for the generator pairs. Normally, the clock rate is 63.921 kHz and bits 0, 5, and 6 of AUDCTL are zero. To get a faster rate, turn on bit 5 if generators 1 and 2 are paired or bit 6 if generators 3 and 4 are paired. The new clock rate is 1.78979 megahertz (MHz). The increased clock rate means that a new equation is necessary to determine the output:

$$F_{OUT} = \frac{F_{IN}}{2(N+M)} \quad (2)$$

where F_{OUT} is the frequency actually

Text continued on page 444

www.americanradiohistory.com

Listing 1: *Radioteletype program for an Atari 800. For more information on the program, see the text box on page 442.*

```
1 REM ********************************
2 REM *  40WPM ATARI RTTY PROGRAM    *
3 REM *      ALL RIGHTS RESERVED     *
4 REM * PROGRAMMER: SCOTT PERSSON.   *
5 REM * DATE:        04-07-81.       *
6 REM * MEMORY:      10420 BYTES     *
7 REM ********************************
8 CLR :POKE 752,1:GOTO 13
9 REM ******* BAUDOT GENERATOR ********
10 A=A(1,P):B=A(2,P):C=A(3,P):D=A(4,P):E=A(5,P):V=A(6,P):POKE 53760,SF:FOR T=1 T
O 5:NEXT T:POKE 53760,A
11 FOR T=1 TO 6:NEXT T:POKE 53760,B:FOR T=1 TO 5:NEXT T:POKE 53760,C:FOR T=1 TO
6:NEXT T:POKE 53760,D
12 FOR T=1 TO 5:NEXT T:POKE 53760,E:FOR T=1 TO 6:NEXT T:POKE 53760,MF:FOR T=1 TO
 8:NEXT T:RETURN
13 REM ******* FREQUENCY INPUT ********
14 ? ">";"<ENTER MARK FREQUENCY>  ";:INPUT MF:MF=(1789790/(2*MF))-7:IF MF-INT(MF
)>=0.5 THEN MF=INT(MF+1)
15 ? :? "<ENTER SPACE FREQUENCY> ";:INPUT SF:SF=(1789790/(2*SF))-7:IF SF-INT(SF)
>=0.5 THEN SF=INT(SF+1)
16 MF=INT(MF-256):SF=INT(SF-256):POKE 53768,120:POKE 53762,1
17 REM ************ MAIN ************
18 DIM A(6,124):POKE 82,2:POKE 764,255:POKE 83,36:? ">";:POSITION 2,1:? "<PLEASE
 WAIT>";:FOR T=1 TO 56
19 READ A:READ B:READ C:READ D:READ E:READ F:READ G:READ H:A(0,A)=B:A(1,A)=C:A(2
,A)=D:A(3,A)=E:A(4,A)=F
20 A(5,A)=G:A(6,A)=H:NEXT T:GOSUB 41:POSITION 2,1:? "<STDBY>        ATARI 800 TEL
ETYPE";:L=0:V=0:GOTO 38
21 IF PEEK(764)=255 THEN POKE 77,1:GOTO 21
22 P=PEEK(764):POKE 764,255:IF P=12 THEN 32
23 IF P=124 THEN GOSUB 10:GOTO 21
24 IF P=60 THEN GOSUB 10:GOTO 21
25 IF P=28 THEN 35
26 IF P=39 THEN 37
27 IF L>64 THEN SETCOLOR 2,2,8
28 L=L+1:IF L=71 THEN P=12:GOTO 32
29 IF ((A(0,P)>64 AND A(0,P)<91) OR P=33) AND V=1 THEN R=P:P=60:GOSUB 10:P=R:GOT
O 31
30 IF (A(0,P)<65 OR A(0,P)>90) AND P<>33 AND V=0 THEN R=P:P=124:GOSUB 10:P=R
31 GOSUB 10:? CHR$(A(0,P));:GOTO 21
32 SETCOLOR 2,9,4:GOSUB 10:P=28:GOSUB 10:P=60:GOSUB 10:L=0:IF PEEK(84)<21 THEN 3
4
33 ? ">":POSITION 2,1:? "<TRANSMIT>     ATARI 800 TELETYPE":? :POKE 752,0:GOTO 2
1
34 POSITION 2,PEEK(84)+1:? " ";"";:GOTO 21
35 IF PEEK(84)<21 THEN GOSUB 10:POSITION PEEK(85),PEEK(84)+1:? " ";"";:GOTO 21
36 GOSUB 10:POKE 84,3:POSITION PEEK(85),PEEK(84):? " ";"";:GOTO 21
37 GOSUB 45:POSITION 2,1:? "<STDBY>       ":POKE 764,255:POKE 752,1
38 IF PEEK(764)<>39 THEN POKE 77,1:GOTO 38
39 GOSUB 45:? ">":POSITION 2,1:? "<TRANSMIT>     ATARI 800 TELETYPE":? :POKE 752
,0:? " ";"";
40 POKE 764,255:POKE 53760,MF:POKE 53763,226:GOTO 21
41 REM ******* ARRAY CONVERSION *******
42 FOR X=1 TO 5:FOR Y=0 TO 124:IF A(X,Y)=1 THEN A(X,Y)=SF:GOTO 44
43 A(X,Y)=MF
44 NEXT Y:NEXT X:RETURN
45 REM ********** MORSE ID ************
46 POKE 752,1:POSITION 2,1:? "<IDENTIFY> ":POKE 53760,25:P=7:GOSUB 51:P=21:GOSUB
 51:GOSUB 51
47 FOR T=1 TO 21:NEXT T:GOSUB 51:P=7:FOR S=1 TO 3:GOSUB 51:NEXT S:FOR T=1 TO 21:
NEXT T
48 P=21:FOR S=1 TO 5:GOSUB 51:NEXT S:FOR T=1 TO 21:NEXT T:GOSUB 51:GOSUB 51:P=7:
GOSUB 51:P=21
```

Listing 1 continued on page 440

www.americanradiohistory.com

Listing 1 continued:

```
49 GOSUB 51:FOR T=1 TO 21:NEXT T:P=7:FOR S=1 TO 2:GOSUB 51:P=21:GOSUB 51:GOSUB 5
1:P=7:GOSUB 51
50 FOR T=1 TO 21:NEXT T:NEXT S:POKE 53760,MF:RETURN
51 POKE 53763,226:FOR T=1 TO P:NEXT T:POKE 53763,224:FOR T=1 TO 5:NEXT T:RETURN
900 DATA 63,65,0,0,1,1,1,0
901 DATA 21,66,0,1,1,0,0,0
902 DATA 18,67,1,0,0,0,1,0
903 DATA 58,68,0,1,1,0,1,0
904 DATA 42,69,0,1,1,1,1,0
905 DATA 56,70,0,1,0,0,1,0
906 DATA 61,71,1,0,1,0,0,0
907 DATA 57,72,1,1,0,1,0,0
908 DATA 13,73,1,0,0,1,1,0
909 DATA 1,74,0,0,1,0,1,0
910 DATA 5,75,0,0,0,0,1,0
911 DATA 0,76,1,0,1,1,0,0
912 DATA 37,77,1,1,0,0,0,0
913 DATA 35,78,1,1,0,0,1,0
914 DATA 8,79,1,1,1,0,0,0
915 DATA 10,80,1,0,0,1,0,0
916 DATA 47,81,0,0,0,1,0,0
917 DATA 40,82,1,0,1,0,1,0
918 DATA 62,83,0,1,0,1,1,0
919 DATA 45,84,1,1,1,1,0,0
920 DATA 11,85,0,0,0,1,1,0
921 DATA 16,86,1,0,0,0,0,0
922 DATA 46,87,0,0,1,1,0,0
923 DATA 22,88,0,1,0,0,0,0
924 DATA 43,89,0,1,0,1,0,0
925 DATA 23,90,0,1,1,1,0,0
926 DATA 31,49,0,0,0,1,0,1
927 DATA 30,50,0,0,1,1,0,1
928 DATA 26,51,0,1,1,1,1,1
929 DATA 24,52,1,0,1,0,1,1
930 DATA 29,53,1,1,1,1,0,1
931 DATA 27,54,0,1,0,1,0,1
932 DATA 51,55,0,0,0,1,1,1
933 DATA 53,56,1,0,0,1,1,1
934 DATA 48,57,1,1,1,0,0,1
935 DATA 50,48,1,0,0,1,0,1
```

Listing 1 continued on page 442

WHY YOU SHOULD MAKE A CORPORATE CONTRIBUTION TO THE AD COUNCIL

The Advertising Council is the biggest advertiser in the world. Last year, with the cooperation of all media, the Council placed almost six hundred million dollars of public service advertising. Yet its total operating expense budget was only $1,147,000 which makes its advertising programs one of America's greatest bargains . . . for every $1 cash outlay the Council is generating over $600 of advertising.

U.S. business and associated groups contributed the dollars the Ad Council needs to create and manage this remarkable program. Advertisers, advertising agencies, and the media contributed the space and time.

Your company can play a role. If you believe in supporting public service efforts to help meet the challenges which face our nation today, then your company can do as many hundreds of others—large and small—have done. You can make a tax-deductible contribution to the Advertising Council.

At the very least you can, quite easily, find out more about how the Council works and what it does. Simply write to: Robert P. Keim, President, The Advertising Council, Inc., 825 Third Avenue, New York, New York 10022.

Ad Council — A Public Service of This Magazine & The Advertising Council.

The cost of preparation of this advertisement was paid for by the American Business Press, the association of specialized business publications. This space was donated by this magazine.

www.americanradiohistory.com

Does Yours Compare with OMNIDISK?

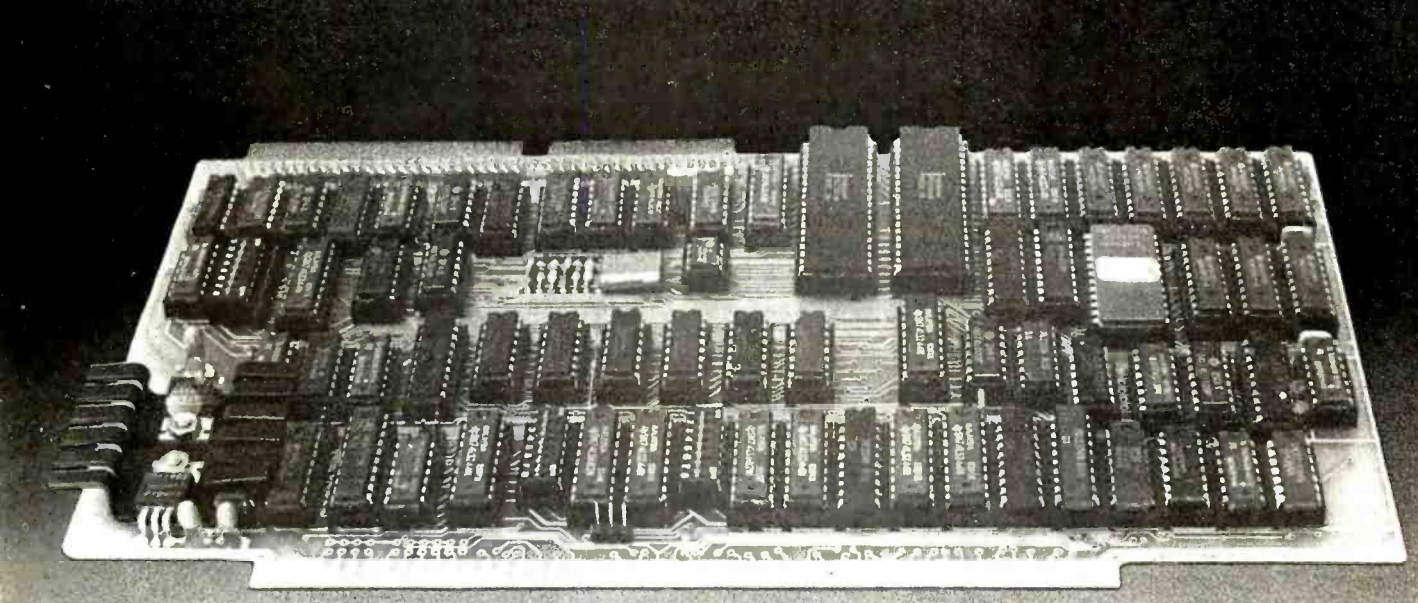

Introducing tomorrow's disk controller . . . OMNIDISK offers S-100 users a unique combination of compatibility and technological innovation that together produce features not found in any conventional disk controllers. See for yourself what tomorrow looks like:

- ✓ **Simultaneous support of both 5¼" and 8" floppy disks allows software transfer between disks.**
- ✓ **24 bit DMA allows CPU by-pass.**
- ✓ **Power-on boot PROM gets you up and running in a hurry.**
- ✓ **On-board de-blocking conserves valuable RAM space above bios.**
- ✓ **Interfaces with the WD 1001® hard disk controller. No need to buy a host adapter.**
- ✓ **Full 16 bit port addressing.**
- ✓ **Full track buffer allows controller to recall entire track, not just sectors. Results in a speed increase 3-to-7-times greater than conventional controllers for both read and write operations.**

OMNIDISK'S features reflect our committment to designing S-100 products with an eye on the future. OMNIDISK'S price reflects our committment to offer products with an eye on the needs of today's user. You can begin using tomorrow's disk controller today for only... **$399***

So why wait, order now.

***CP/M configured for OMNIDISK, only $25 with purchase.**

FULCRUM™
COMPUTER PRODUCTS

distributed by:
W.W. COMPONENT SUPPLY INC.
1771 Junction Avenue
San Jose, CA 95112
(408) 295-7171

FREE U.P.S. ground shipping on pre-paid orders. Shipping will be added to C.O.D., VISA and M/C orders. CA residents please add sales tax.

Tomorrow's 8 MHZ Z80 CPU coming soon from FULCRUM

Circle 464 on Inquiry card.

www.americanradiohistory.com

StarLogic Announces More Disk Drive Savings

TANDON DRIVES FOR IBM AND TRS-80
These basic drives can be mounted internally on IBM and TRS-80-III personal computers. Both full-size and the new ThinLine models are available.

TANDON TM100-1	$165.00
TANDON TM50-1	$145.00
TANDON TM100-2	$235.00
TANDON TM55-2	$215.00
TANDON TM-100-4	$295.00
TANDON TM55-4	$275.00
TANDON TM101-4	$295.00
TANDON TM848-1	$350.00
TANDON TM848-2	$425.00

APPLE II-COMPATIBLE DISK DRIVES
Includes drive, cable and cabinet
(also compatible with Franklin ACE)

5¼" standard drive	$205.00
ThinLine drive	$185.00
Dual ThinLine drives	$335.00

EXTERNAL DRIVES FOR IBM PC
Price includes drive, power supply, cable and cabinet.

100-1 with 160K IBM format	$235.00
100-2 with 320K IBM format	$305.00
55-2 with 320K IBM format	$285.00
100-4 with 650K IBM format *(includes software patch to DOS 1.1)*	$385.00
55-4 with 650K IBM format *(includes software patch to DOS 1.1)*	$365.00

EXTERNAL DRIVES FOR TRS-80 MODEL III, TANDY COLOR COMPUTER AND TEXAS INSTRUMENTS
Prices includes drive, power supply, cable and cabinet. Storage is unformatted.

100-1 with 250K*	$235.00
50-1 with 250K*	$215.00
100-2 with 500K	$305.00
55-2 with 500K	$285.00
100-4 with 1000K	$365.00
55-4 with 1000K	$345.00

**Compatible with Tandy Color Computer*

WINCHESTER SUBSYSTEMS FOR IBM PC
Includes Winchester disk drive, cabinet, power supply, cable, controller, I/O adaptor and software (JEL) for 1.1 DOS

5 Megabyte	$1375.00
10 Megabyte	$1575.00
15 Megabyte	$1775.00
30 Megabyte	$2275.00

All drives and peripherals have our standard warranty which includes 90 days parts and labor.

TELEPHONE ORDERS ONLY
Only phone orders will be accepted. Master Card, VISA, Cashier's Check, COD accepted.
(213) 883-0587

StarLogic

Apple is a registered trademark of Apple Computer, Inc.
IBM and IBM PC are registered trademarks of IBM Corporation.
TRS-80 is a registered trademark of Tandy Corporation.
ThinLine is a registered trademark of Tandon Corporation.
JEL is a product of Tall Tree Systems.

Prices subject to change without notice.
Prices do not include shipping charges which will be added to billing.

Listing 1 continued:

```
936 DATA 60,32,0,0,0,0,0,0
937 DATA 124,32,0,0,1,0,0,1
938 DATA 12,32,1,1,1,0,1,0
939 DATA 33,32,1,1,0,1,1,0
940 DATA 14,45,0,0,1,1,1,1
941 DATA 88,36,0,1,1,0,1,1
942 DATA 95,33,0,1,0,0,1,1
943 DATA 91,38,1,0,1,0,0,1
944 DATA 90,35,1,1,0,1,0,1
945 DATA 115,39,0,0,1,0,1,1
946 DATA 112,40,0,0,0,0,1,1
947 DATA 114,41,1,0,1,1,0,1
948 DATA 94,34,0,1,1,1,0,1
949 DATA 38,47,0,1,0,0,0,1
950 DATA 66,58,1,0,0,0,1,1
951 DATA 2,59,1,0,0,0,0,1
952 DATA 102,63,0,1,1,0,0,1
953 DATA 32,44,1,1,0,0,1,1
954 DATA 34,46,1,1,0,0,0,1
955 DATA 28,28,1,0,1,1,1,0
```

The Radioteletype Program

The program I used to implement radioteletype frequencies is presented in listing 1. The following paragraphs comment on the significant lines of the program.

Lines 10 through 12 (timing loops) must be placed at the program's beginning because the BASIC interpreter looks for line calls (GOTO and GOSUB) from line 0. If the loops were any deeper in the program, the timing loop delays would be in error.

Lines 14 and 15 contain the input routine, where you enter the mark and space frequencies you wish to use.

Line 16 sets up the high-precision generator pair, then sets the high-order byte of the pair to 1, which will make the pair generate at radioteletype frequencies.

Lines 18 and 19 read character data into A, a two-dimensional array, using scalar variables A through H (see DATA statements in lines 900 through 955). Of these variables, A represents the keyboard code for the key that will be pressed, B is the ATASCII (Atari ASCII code) equivalent for the character in variable A, variables C through G collectively form the 5-bit Baudot equivalent (0 for mark tone and 1 for space tone), and H is a figures/letters-shift flag. H equals 0 if the character is in lower (letters) shift, 1 if the character is in upper (figures) shift.

Line 21 looks for keyboard input from memory location CH (hexadecimal 01FC).

Lines 22-26 look for special-case RTTY characters, such as ⅄ (the Atari-logo key), Carriage Return, Linefeed, Ltrs (letters shift), Figs (figure shift), and Bell. The program includes automatic up- and down-shifting, and will generate a combined Linefeed/Ltrs upon receipt of a Carriage Return. The program loops constantly until the Atari-logo key is pressed. The Atari-logo key will also terminate RTTY transmission and return the program to standby looping.

Line 27 changes the screen color when over 64 characters have been typed on one line, to remind you that only 5 characters remain on a standard RTTY line. If you continue to type, a combined Carriage Return/Linefeed/Ltrs will be sent automatically when you reach 70 characters.

Lines 46 through 51 contain the Morse-code identification routine. This must be changed for your call sign. To do so, change the values of P (dit = 7, dah = 21), the number of repetitions (GOSUB 51), and the placement of the delays between characters (FOR T = 1 to 21:NEXT T). The existing call sign is WB0QPP.

www.americanradiohistory.com

TRS-80®
COMPUTERS
PURE RADIO SHACK EQUIPMENT

BUY BY DIRECT-MAIL

1-800-841-0860
CONVENIENT ORDER ENTRY

MICRO MANAGEMENT SYSTEMS INC.

TRS-80 COLOR COMPUTER

DISCOUNT PRICED FROM **CALL**

BUY DIRECT 26-3004

TRS-80 MODEL III COMPUTER

DISCOUNT PRICES FROM **$588**

BUY DIRECT 26-1061

TRS-80 MODEL 16 COMPUTER

DISCOUNT PRICED FROM **$4098**

BUY DIRECT 26-6001

FRANKLIN
ACE 1000 COMPUTER
DISCOUNT PRICED FROM **$CALL**

SMITH CORONA TP-I DAISY WHEEL PRINTER

DISCOUNT PRICED FROM **$559**

BUY DIRECT

ATARI
HOME COMPUTERS
DISCOUNT PRICED FROM **$629**

TRS-80 MODEL II COMPUTER

DISCOUNT PRICED FROM **CALL**

BUY DIRECT 26-4002

TRS-80 I/III **HARD DRIVES** **$1988**

26-1130

commodore
TEXAS INSTRUMENT
CALL FOR PRICES

TRS-80 PRINTERS — MFG BY RADIO SHACK

DWP-410	$1287.00
DMP-100	$339.00
DMP-200	$679.00
DMP-400	$1015.00
DMP-500	$1525.00

PLEASE WRITE US FOR FREE

- COPY OF OUR CUSTOMER DISCOUNT PRICE LIST UPON REQUEST
- COPY OF MANUFACTURERS WARRANTY UPON REQUEST

OKIDATA EPSON

MICRO MANAGEMENT SYSTEMS INC.

PARCEL DIVISION
DEPT. NO. 1
2803 THOMASVILLE RD. EAST
CAIRO, GA. 31728

GA. INFO **912-377-7120**

TM - TANDY CORPORATION

TRS-80 SOFTWARE
VISICALC, PROFILE, SCRIPSIT & MORE
SAVE MONEY

PRICES AND PRODUCTS SUBJECT TO CHANGE WITHOUT NOTICE. ORDERS SUBJECT TO VERIFICATION AND ACCEPTANCE.

Circle 273 on inquiry card.

www.americanradiohistory.com

A CompuPro System = Cost-Effectiveness

www.americanradiohistory.com

More performance,

Handles 8 and/or 16 bit software, single to multi-user.
Features high speed operation with lots of memory.

more quality,

Combines innovative but proven hardware with best-selling, industry-acclaimed software packages.

more reliability,

Not 90 days, but one year limited warranty
(two years optional at extra cost).

and more service per dollar spent.

Authorized service now available at 50 locations nationwide.

For a convincing demonstration of why **CompuPro** is your most cost-effective choice for business, industrial and scientific computing applications, visit your **Authorized CompuPro Systems Center.**

CompuPro®

CompuPro division, Godbout Electronics, Box 2355, Oakland Airport, CA 94614

Circle 93 on Inquiry card.

www.americanradiohistory.com

Circle 145 on inquiry card.

!!!!FANTASTIC PRICES!!!!
FROM DIGITAL DIMENSIONS

OKIDATA
ML-80 ..... $339
ML-82A $415
*ML-83A $680
*ML-84(parallel) $985
*ML-84(serial) $1.095
ML-92 ..... $509
ML-93 ..... $869
PACEMARK 2410 ..... CALL
PACEMARK 2350 ..... CALL
*Includes Tractor Feed

ANADEX DP8000 ..... $749
ANADEX DP9500/9501 ..... $1279
ANADEX 9500A/9501A $1359
ANADEX DP9000/9001 ..... $1209
ANADEX DP9620A $1459

SCM-TP I $649
120 word/min Daisy Wheel. 10 or 12 pitch, serial or parallel interface

DAISYWRITER 2000 ..... $1,015
BIDIRECTIONAL 40 CPS AVERAGE THROUGHPUT, 48K BUFFER, CENTRONICS, 488, RS232 & C. LOOP INCLUDED.
DAISYWRITER 1500 S $955
4K Buffer Serial Only
DAISYWRITER 1500 P $925
4K Buffer Parallel Only

IDS
PRISM 80 ..... $1.219
Includes sprint mode, dot plot and cut sheet guide
PRISM 80 ..... $1319
Includes sprint mode, dot plot, cut sheet guide and 3.4K buffer.
PRISM 132 ..... $1.649
Includes all of above and 4-color graphics

C.ITOH
Prowriter (Parallel) $489
Prowriter (Serial) $629
Prowriter 2 (Parallel) $719
Prowriter 2 (Serial) $769
Starwriter F10 ..... $1.449
Printmaster F-10 ..... $1.699

DISK DRIVES
RANA ELITE I $305
MICRO-SCI $289

MODEMS
HAYES 300 BAUD SMART MODEM $219
HAYES 1200 BAUD SMART MODEM $515

E-Z COLOR board $199
For the Apple II or Apple II Plus. 16-Color, 256 x 192 resolution. Requires 3.3 DOS. Includes demo software and E-Z COLOR Editor.
E-Z COLOR board for S100 Systems .. $279
E-Z COLOR board for TRS-80 ..... $239

INTEX TALKER text-to-speech synthesizer. Serial and parallel interface included $280

AMDEK 13" COLOR-I $335
AMDEK 13" COLOR II $719
NEC JB1201 GREEN Monitor $159

FOR THE IBM P.C.
Quadram Quadboard w/64k $429
Quadram Quadboard w/128k $519
Quadram Quadboard w/192k $609
Quadram Quadboard w/256k $699

DIGITAL DIMENSIONS
190 Chapel Rd.,Manchester, CT 06040
Info & Orders Call 203-649-3611
Orders Only 1-800-243-5222
C.O.D. Welcome. Allow 2-3 Weeks For Checks. MC/VISA OK. All Prices Include UPS Ground Freight In U.S. CT Residents Add 7½% Sales Tax. Prices Subject To Change Without Notice.

BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0	
1	0	1	0	0	0	0	0	– OFF
1	0	1	0	1	0	0	0	– 1/2 VOLUME
1	0	1	0	1	1	1	1	– FULL VOLUME

Figure 2: *The audio-control registers (AUDC1 to AUDC4) control the volume of the corresponding audio generator (1 to 4). The volume range is from 224 to 239 decimal.*

Text continued from page 438:

obtained from the computer, F_{IN} is 1,789,790 Hz (1.78979 MHz), N is the number to be passed to the generator pair, and M is always 7 for a generator pair.

For example, we'll find the value of N to yield the space tone 2975 Hz used in 850-Hz shift radioteletype:

$$F_{OUT} = \frac{F_{IN}}{2(N+7)}$$

$$2975 = \frac{1{,}789{,}790}{2(N+7)}$$

$$N = 293.8$$

The closest integer value for N is 294. By passing the generator pair 294, we get an audio-output frequency of 2973.07 Hz, only about 0.06 percent off our goal.

Our next problem is to put the value 294 into memory. Obviously it cannot be entered as an 8-bit integer because the maximum integer value is 255. However, by passing the generator pair 16 bits of information we can easily denote the decimal number 294 in two 8-bit "pieces." First, convert the decimal number obtained from equation 2 into a 2-byte hexadecimal number: the decimal number 294 equals the hexadecimal number 0126. The two most significant digits (01) make up the *high-order byte* and the two least significant digits (26) make up the *low-order byte*. Next, convert each hexadecimal byte back to its decimal value, individually: 01 hexadecimal equals 1 decimal and 26 hexadecimal equals 38 decimal. These numbers are then passed to the audio-frequency registers (AUDF1 through AUDF4). Using the POKE command, place the high-order byte into the high AUDF register of the pair and the low-order byte into the low AUDF register.

Volume Control

Once the frequency is determined, the volume must be set because its default value is zero. The volume is controlled by the audio-channel control registers (AUDC1 through AUDC4, see figure 2). Because the generators are paired, it is necessary to turn on only AUDC2 or AUDC4 for output. For full volume, use the POKE command to place the number 239 into the appropriate AUDC; for zero volume, use POKE to enter the number 224. The values within that range will vary the volume proportionately.

Putting It Together

To create high-precision audio, follow these steps:

- Set up the generator pair(s) and increase the clock rate by changing the AUDCTL register with the POKE command.
- Choose an output frequency and obtain N from equation 2.
- Split N into two hexadecimal bytes and then convert each byte into its decimal equivalent.
- Use the POKE command to place

www.americanradiohistory.com

Listing 2: *This short program will set up generator pairs 1 and 2 and 3 and 4 and prepare them for high-precision sound generation. To obtain a given frequency, use the number N from equation 2 in the format HB (high-order byte) and LB (low-order byte); e.g., for 1050 Hz the number is 845. HB = 845/256 or 3; LB = 77 (the remainder). The value for VOLUME should be determined empirically.*

```
10 POKE 53768,120          REM SETS UP THE PAIRS
20 POKE 53762,HB           REM HB -- HIGH ORDER BYTE
30 POKE 53760,LB           REM LB -- LOW ORDER BYTE
40 POKE 53763,VOLUME       REM VOLUME = 160(OFF) TO 175(FULL)
```

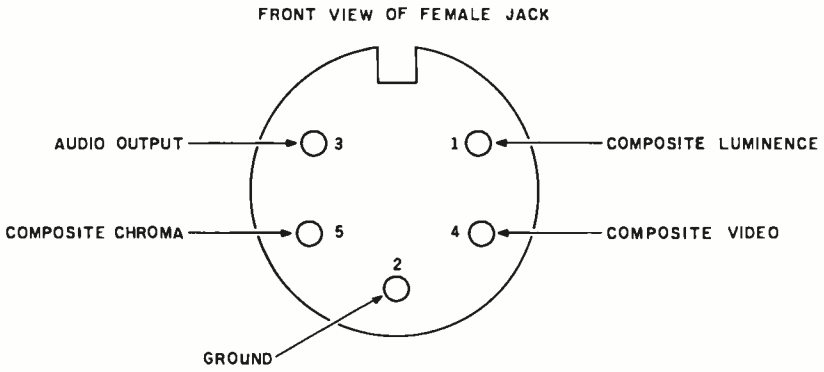

Figure 3: *The pinout from the Atari monitor jack (front view). The audio frequencies are taken from pins 2 and 3.*

A BASIC assembly-language version of the RTTY program is available on cassette from the author for $15. It features RTTY transmission and reception at any speed and any audio shift. It comes preprogrammed with the individual's call sign. For information send a stamped, self-addressed envelope to:

Scott Persson WB0QPP
4719 Valley St.
Omaha, NE 68106

the high byte into the high AUDF of the generator pair and the low byte into the low AUDF.

- Choose a volume level and use POKE to place the value (224 to 239) into either AUDC2 or AUDC4.

You can use the program presented in listing 2 to experiment with high-precision frequency generation.

The audio output from the Atari comes from the monitor jack, which is located on the right side of the computer near the peripheral jack (see figure 3). The audio frequencies are taken from pins 2 and 3; note that pin 2 is the ground. A 5-pin DIN (Deutsche Industrie Norm) plug and shielded audio cable are the only interface necessary. There are few hams who can boast of 99.94-percent tone accuracy—much less a $2 interface—and it's all accessible with a little SOUND thinking. ■

Electronic Circuit Analysis

- DC and AC analysis
- Very fast, machine language
- Infinite circuits on multiple passes
- Worst case, sensitivity analysis
- Dynamic modification
- 64 Nodes, 127 branches
- Compare circuits
- Log or linear sweep
- Full file handling
- Frequency response, magnitude and phase
- Complete manual with examples
- TRS-80 (TRSDOS) $90.00
- CP/M $150.00

Tatum Labs
P.O. Box 722
Hawleyville, CT
06440
(203) 426-2184

Circle 415 on inquiry card.

TYCOMP

PRINTERS — DOT MATRIX
PROWRITER — 458
PROWRITER II — 650
NEC — 8023A — 489
OKIDATA — NEW!!
ML 92 — 560
ML 93 — 995
PLUS ALL OTHER OKIDATA PRODUCTS!!
EPSON — CALL FOR PRICING!!
LETTER QUALITY
F-10 STARWRITER — 1399
F-10 PRINTMASTER — 1600
WE CARRY — IBM PC, BELL & HOWELL
APPLE, ATARI AND MORE
PLUS A FULL LINE OF SOFTWARE
FOR ALL MACHINES

MONITORS
USI — PI-1-122
PI-2-145
PI-3-170
PI-4-150 — 160
AMDEK 300G — 330
AMDEK COLOR I — 330
AMDEK COLOR II — 699
DAVONG HARD DISKS
CALL FOR EXCELLENT PRICES!!
RANA DISK DRIVES
ELITE I - W/CONT — 385
ELITE I - W/O — 295
ELITE II - W/CONT — 600
ELITE II - W/O — 520
ELITE III - W/CONT — 725
ELITE III - W/O — 650

CALL: (803) 877-2468 or WRITE:
THE TYCOMP CO.
700 W. POINSETT ST.
GREER, S.C. 29651
CALL OR WRITE FOR FREE CATALOG!!

Circle 436 on inquiry card.

Future Shock!

age	65
years worked	40
retirement benefits	0

The U.S. Department of Labor has a free booklet that will help you answer these questions and a lot more. Send for it today.
Write: Pensions, Consumer Information Center, Pueblo, Colorado 81009

U.S. Department of Labor

www.americanradiohistory.com

In the beginning, there was the printer.

And right on its heels came the first printer breakdown.

Unfortunately, the first printer service call didn't happen nearly so quickly, thus creating downtime – a problem that still plagues users today.

What's the answer? Non-Stop-Printing from Trilog.

Two heads are better than one.

Most dot-matrix line printers use only a single print head. That's fine – unless something goes wrong with the head. Then you're out of business until a service representative shows up.

On the other hand, the Trilog TIP-300 uses an exclusive two-headed system. Both 150 lpm print heads run simultaneously. Giving you a total output of 300 lpm.

Should one print head temporarily fail, the user simply flips a switch and the remaining head continues printing at 150 lpm.

Now that's Non-Stop-Printing!

Dual heads offer another advantage, too. Instead of being pushed to capacity like most single heads, each Trilog head runs at a 50% duty cycle. This makes them much

Non-Stop-Printing.™ advance since the p

www.americanradiohistory.com

more reliable than conventional print heads.

Advanced innovation isn't just in our heads.

That's why we also gave Trilog printers dual tractors. They not only stabilize the paper and minimize friction, but allow the paper to move forward and backward. This gives you plotting capability and lets you generate forms. You can also print bar codes. Plus business and engineering graphics.

Five printers for the price of one.

Besides graphics, the TIP-300 gives you four other types of printing: standard data processing characters. Letter quality characters that approach the sharpness of fully formed characters. And two versions of compressed characters for paper savings and special formats.

For more information contact: Trilog, Inc., 17391 Murphy Ave., Irvine, CA 92714. Or call (714) 549-4079. TWX (910) 595-2798.

You'll see that compared to Trilog, other printers are still in the Dark Ages.

Non-Stop-Printing starts with

TRILOG®

The single greatest rinter was invented.

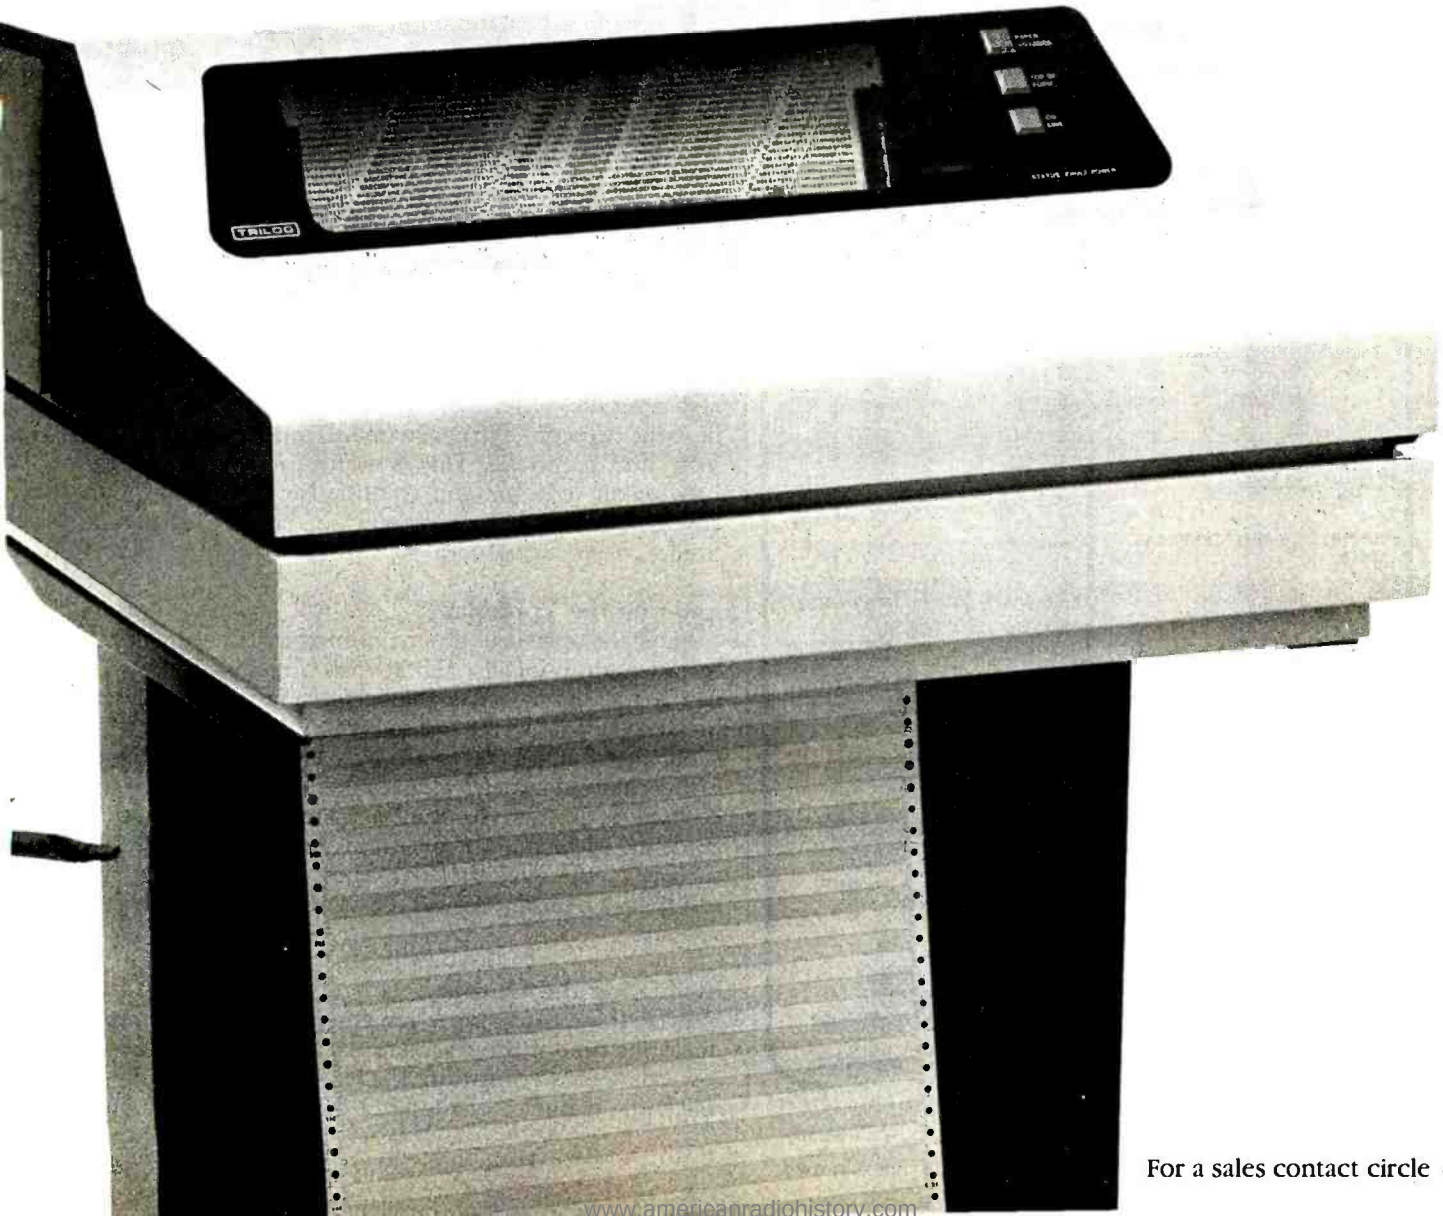

For a sales contact circle 490

www.americanradiohistory.com

The Best In Price, Selection and Delivery

Call Now TOLL FREE 800-368-3404

(In VA, Call Collect 703-237-8695)

AMPEX•INTERTEC•TEXAS INSTRUMENTS•GENERAL DATA COMM.•ANDERSON JACOBSON•C. ITOH•QUME • BEEHIVE• DATASOUTH•DIABLO•CENTRONICS • NEC • PRENTICE

MICROS

INTERTEC SUPERBRAIN II
64K DD* ..... ONLY $1895
64K QD* ..... ONLY $2295
64K SD* (96TPI) .. ONLY $2695
*(includes M/Soft BASIC)
DDS-10 Meg (Hard Disk) ..... ONLY $3195
DYNABYTE ..... Call

PRINTERS

NEC
7710 Ser. $2149
7715 ..... $2196
7730 Par. $2149
7720 ..... $2449
7725 ..... $2496
Std. Tractor 77 xx ..... $ 199
3510 ..... $1390
3510EX ... Call for Special Price
3515 ..... $1395
DATASOUTH ..... Call
DIABLO
620-SPI $1144
630-R102/147 ..... $1949
630-ECS ..... Call
630-R153* $1745
*(for IBM P.C., Apple II, TRS-80)
630-R155 ..... Call
630-K104 (KSR) $2385
QUME
Sprint 9/45 FP $1794
Sprint 9/55 FP $2119
Sprint 9/55 FP/XMEM $2186
Sprint 9/55 LP/XMEM $2094
Sprint 11/40-PLUS ..... Call
Bi-Dir. Forms Tractor .... $ 199
CENTRONICS: 34/38 ..... Call

TERMINALS

AMPEX
D80 ..... $ 699
BEEHIVE (SMART DISPLAY)
DM5 ..... Call
DM5A ..... Call
DM310 (3101 Emulator) ... Call
DM 3270 (3270 Emulator) .. Call
Protocol Converter ..... Call
QUME
QVT-102 ..... $ 594
QVT-103 ..... $ 739

C. ITOH
CIT 101 ..... $1350
CIT 161 (Color) ..... Call
TEXAS INSTRUMENTS
745 Standard $1390
745 Std. (Reconditioned) ... Call
765 Bbl M'my ..... Call
785/787 ..... Call
810 Basic $1249
810 Package $1439
820 Package RO Package $1610
820 KSR Package ..... Call
840 RO Basic ..... $ 795
840 RO Tractor Feed Pkg. $1059
940 Video Ed'tr $1570

MODEMS

PRENTICE STAR 300 Bd. . $ 124
GDC 1035JL ..... $ 169
1200-9600 Baud ..... Call
Stat Muxes ..... Call

DISC DRIVES

QUME
Data Trak 5 ... $289 or 2 for $549
Data Trak 8 ... $519 or 2 for $999

SOFTWARE

BISYNC-3780 ..... $ 769
Wordstar (IBM P.C.) ..... $ 279
Data Star ..... $ 218
Mail Merge ..... FREE*
Spell Star ..... $ 149
Spell Guard ..... $ 229
Plan 80 ..... $ 249
d Base II ..... $ 529
CalcStar ..... $ 191
SuperSort ..... $ 158
Super Calc ..... $ 249
InfoStar ..... Call
CIS Cobol ..... $ 689
Forms II ..... $ 159
MACRO 80 ..... $ 183
"C" Compiler ..... $ 177
*With purchase of InfoStar.

Special! While They Last!
SOROC TERMINALS
IQ 120 ..... ONLY $625

NOTE: IBM and Burroughs compatible terminals available. Please inquire.

In addition, we can make EIA RS 232 or RS 449 cables to your order, and supply you with ribbons, printer stands, print wheels, thimbles for all printers listed. And many, many more items. CALL NOW.

All items shipped freight collect either motor freight or UPS unless otherwise specified. All prices already include 3% cash discount. Purchase with credit card does not include discount. Virginia residents, add 4% Sales Tax. For fastest delivery send certified check, money order or bank-wire transfer. Sorry, no C.O.D. orders. All equipment is in factory cartons with manufacturers' warranty (honored at our depot). Prices subject to change without notice. Most items in stock.

TERMINALS TERRIFIC

MasterCard VISA

Terminals Terrific, Inc., P.O. Box 216, Merrifield, VA 22116
Phone: 800-368-3404 (In VA, Call Collect 703-237-8695)

Computing Telescope Parameters with the OSI Superboard II

R. B. Minton, c/o BYTE, POB 372, Hancock, NH 03449

The program in listing 1 is written for the Ohio Scientific Superboard II and will run in 4K bytes of programmable memory. It computes various optical parameters for a Newtonian reflecting telescope and should be useful to anyone who already owns a reflector or is considering buying or making one.

The program computes a telescope's power, F number (focal ratio), eye relief, Ramsden disk diameter, magnitude limit, resolving power (Dawes' limit), prime-focus scale, and the size (in arc-seconds and microns) of a star image at various angular and linear distances from the optical axis. This will certainly be a blessing to stargazers, because knowing the size of star images helps evaluate the performance of a telescope. The program also computes what the axial spherical aberration would be if the telescope's primary (main) mirror were spherical instead of parabolic. This is useful to anyone making a Newtonian reflector and wanting the focal length long enough so that the mirror will not have to be parabolized.

Entering the Variables

Enter the aperture (the main mirror diameter) and the focal length in inches. (These may already be known or can be measured.) Enter the eyepiece focal length in millimeters. If you prefer to use inches, delete line 280. The usual types of eyepieces are Ramsden, Kellner, Plossel, orthoscopic, symmetrical, or Erfle. Enter the first letter of the type of eyepiece for the eye relief calculation (the distance the eye should be positioned from the outside glass surface of the eyepiece). Distances other than this will result in a restricted field of view and uncomfortable viewing.

Evaluating the Output

After these four values are entered, the program produces the first of three screens of data. The first lists the input data for verification, the telescope's power, the eye relief, the diameter of the Ramsden disk, the magnitude

Circle 423 on inquiry card.

www.americanradiohistory.com

Listing 1: *A BASIC program for the Ohio Scientific Superboard II that computes optical parameters for a Newtonian telescope. The program will run in 4K bytes of programmable memory and compute telescope power, F number, eye relief, Ramsden disk diameter, magnitude limit, resolving power, prime-focus scale, and the size of a star image at various angular and linear distances from the optical axis.*

```
10  REM PROGRAM TELESCOPE OPTICS
20  REM BY R. B. MINTON
30  PI=3.14159
40  Q=180 : JJ=250
50  KN=.3
60  K=(Q/PI)*3600
70  FOR X=1 TO 32:PRINT:NEXT
80  PRINT "PROGRAM TELESCOPE COM-":PRINT
90  PRINT "PUTES VARIOUS PARAME-":PRINT
100 PRINT "TERS FOR A REFLECTING":PRINT
110 PRINT "TELESCOPE":PRINT
120 FOR X=1 TO 3000:NEXT
130 FOR X=1 TO 32:PRINT:NEXT
140 PRINT "ENTER APERTURE":PRINT
150 INPUT A:PRINT
160 PRINT "ENTER MIRROR F. L.":PRINT
170 INPUT FL:PRINT
180 FO=FL/A
190 FO=INT(100*FO)/100
200 PRINT "ENTER EYEPIECE F. L.":PRINT
210 INPUT EF:PRINT
220 PRINT "ENTER EYEPIECE TYPE":PRINT
230 INPUT A$:PRINT
240 IF A$="P" THEN KN=.75
250 IF A$="O" THEN KN=.8
260 IF A$="S" THEN KN=.8
270 IF A$="E" THEN KN=.35
280 EF=EF/25.4
290 EF=INT(100*EF)/100
300 PO=FL/EF
310 PA=INT(PO+.5)
320 RD=A/PO
330 RD=INT(1000*(RD+.0005))/1000
340 ER=(FL*EF*KN)/(FL-EF)
350 ER=INT(100*ER)/100
360 MA=9+(5*(LOG(A)/LOG(10)))
370 MA=INT(10*(MA+.05))/10
380 DL=4.56/A
390 DL=INT(100*(DL+.005))/100
400 SC=8120.66/FL
410 FOR X=1 TO 32:PRINT:NEXT
420 PRINT "APERTURE=";A:PRINT
430 PRINT "MIRROR F. L. =";FL:PRINT
440 PRINT "TELESCOPE F/NO=";FO:PRINT
450 PRINT "EYEPIECE F. L. =";EF:PRINT
460 PRINT "TELESCOPE POWER =";PA:PRINT
470 PRINT "EYE RELIEF=";ER:PRINT
480 PRINT "RAMSDEN DISK=";RD:PRINT
490 PRINT "MAG. LIMIT=";MA:PRINT
500 PRINT "DAWES LIMIT=";DL:PRINT
510 PRINT "P. F. SCALE=";SC:PRINT
520 PRINT "ENTER C TO CONTINUE":PRINT
530 INPUT A$:PRINT
540 IF A$<>"C" GOTO 970
550 FOR X=1 TO 32:PRINT:NEXT
560 PRINT "ENTER FIELD DIA.(DEG)":PRINT
570 INPUT FD:PRINT
580 FR=FD/2
590 PRINT "ENTER STEP SIZE":PRINT
600 INPUT SS:PRINT
610 PRINT "ANGLE COMA  ASTIG.":PRINT
620 FOR I=SS TO FR STEP SS
630 FA=I*(PI/Q)
640 CO=(FA/(16*(FO*FO)))*K
650 AS=((FA*FA)/(2*FO))*K
660 PRINT I;CO;AS:PRINT
670 FOR J=1 TO JJ:NEXT J
680 NEXT I
690 SP=(.0078/(FO*FO*FO))*K
700 PRINT "AX. SP.  AB. =";SP:PRINT
710 PRINT "ENTER C TO CONTINUE":PRINT
720 INPUT A$:PRINT
730 IF A$<> "C" GOTO 970
740 FOR X=1 TO 32:PRINT:NEXT
750 PRINT "RADIUS COMA  ASTIG.":PRINT
760 FOR I=2 TO 18 STEP 2
770 FA=(I*SC)/K
780 CO=(FA/(16*(FO*FO)))*K
790 CO=CO/SC
800 CO=(INT((CO+.0005)*1000)/1000)*1000
810 AS=((FA*FA)/(2*FO))*K
820 AS=AS/SC
830 AS=(INT((AS+.0005)*1000)/1000)*1000
840 PRINT " ";I;"  ";CO;"  ";AS:PRINT
850 FOR J=1 TO JJ:NEXT J
860 NEXT I
870 SP=SP/SC
880 SP=(INT((SP+.0005)*1000)/1000*1000
890 PRINT "AX. SP.  AB. =";SP:PRINT
900 PRINT "MORE COMPUTATIONS?":PRINT
910 INPUT A$:PRINT
920 IF A$="N" GOTO 970
930 PRINT "DIFFERENT OPTICS?":PRINT
940 INPUT A$:PRINT
950 IF A$="Y" GOTO 130
960 GOTO 550
970 PRINT "END OF RUN":PRINT
980 END
```


DOES YOUR E.Q. NEED IMPROVING?

(Economics Quotient)

IT MIGHT. TAKE THIS QUICK QUIZ AND FIND OUT.

True False

☐ ☐ **(1.)** When inflation occurs, each dollar we have buys more goods and services.

☐ ☐ **(2.)** As productivity increases, our standard of living increases.

☐ ☐ **(3.)** One out of five American workers belongs to a labor union.

If you found these questions tough, your Economics Quotient, your E.Q., could probably stand some improvement.

A special booklet on our American Economic System can help you do just that. It's fact-filled, easy reading and free.

For your free copy, write "Economics," Pueblo, Colorado 81009.

ANSWERS: 1.F 2.T 3.T

The American Economic System

We should all learn more about it.

Ad Council

www.americanradiohistory.com

limit, the Dawes' limit, and the prime-focus scale. The Ramsden disk is the diameter of the beam of light entering the eye. If it is larger than the pupil diameter, some light is being wasted. An eyepiece should be used with a focal length that gives a Ramsden disk no larger than 0.25 or 0.20 inch. The magnitude limit will indicate approximately the faintest star visible with the telescope. The Dawes' limit gives the resolving power in arc-seconds of a parabolic mirror with a good *figure* (good optical performance). Indeed, the main function of a telescope is to gather light, up to the magnitude limit, and increase resolution, up to the Dawes' limit. The average naked eye can see a sixth-magnitude star and has a resolution of 60 to 120 arc-seconds. The prime-focus scale is expressed in arc-seconds per millimeter and allows computing the size of an object if one were to photograph it at prime-focus and with no supplementary optics.

The second screen of data requires entering the field diameter in degrees and the step size. A small to medium-sized telescope has a maximum angular field of view of usually 0.25° to 1° for the lowest-powered eyepiece. The field can be judged by looking at the moon, which is close to 0.50° in diameter. If 1.0 and 0.1 are entered as field and step size, the program will output the angular diameters of the two major optical aberrations, coma and astigmatism, 0.1° to 0.5° from the optical axis. Both coma and astigmatism are zero-valued on axis for a parabolic mirror. The combined effect of these aberrations is to make what is a small, round, sharp star image at the center of the field appear as a fan-shaped and elongated image near the edge of the field of view. The severity of their effects can be judged by comparing the computed values to the Dawes' limit. If the values are larger, they will be visible to the eye. If the values are five to ten times larger, they may be objectionable to the viewer. Lines 670 and 850 slow the listing and may be deleted. The "AX. SP. AB." is the axial spherical aberration in arc-seconds, and later in microns.

The third screen of data is similar to the second except the values of coma and astigmatism are recorded in microns (a linear measure) instead of arc-seconds (an angular measure). A micron is 10^{-4} cm or 0.001 mm. This output is useful to the person taking photographs through a telescope at prime focus with a 35 mm camera. The field radius and step size are defined by line 760 as 18 mm and 2 mm, respectively. Star image sizes of 20 microns to 50 microns are acceptable for photography. The scale is used to compute the size of an object on film. The formula is *size = angular diameter* (in arc-seconds) / prime-focus scale (in arc-seconds per millimeter). For example, the moon is ½ × 60 arc-min/deg × 60 arc-sec/min or about 1800 arc-seconds; and would have an 1800/180 or 10 mm diameter for a telescope with a focal length of 45 inches (1143 mm).

Many of the values are rounded to two or three decimal places in accordance with the expected accuracy of the input data and the limitations of the observer, telescope, and observing environment. ■

You can now order article reprints from this publication

University Microfilms International, in cooperation with publishers of this journal, offers a highly convenient Article Reprint Service. Single articles or complete issues can now be obtained in their original size (up to 8½ x 11 inches). For more information please complete and mail the coupon below.

ARTICLE REPRINT SERVICE
University Microfilms International

☐ YES! I would like to know more about the Article Reprint Service. Please send me full details on how I can order.
☐ Please include catalogue of available titles.

Name _____ Title _____
Institution/Company _____
Department _____
Address _____
City _____ State _____ Zip _____

Mail to: University Microfilms International
Article Reprint Service
300 North Zeeb Road
Ann Arbor, Michigan 48106

www.americanradiohistory.com

Binary-Format Number Storage on the Apple II Disk

A machine-language routine to read and write binary data to a text file.

David Eyes
266 Broadway
Arlington, MA 02174

A limitation of the Applesoft DOS (disk operating system) is its inability to store a number in its binary floating-point form in a disk text file. Applesoft uses this form, a 32-bit binary number (the mantissa) times 2 to a given power (the exponent), to represent a real number to itself.

If all numeric data could be written to a text file in that form, you would be able to use direct-access files efficiently and accurately. Each real number would always be 5 bytes long, giving you complete control over field and record lengths. If you need to make frequent inquiries or updates to selected records, a direct-access file is the most effective type of organization. This article describes machine-language subroutines that permit the most efficient use of disk space by storing a number in the same binary floating-point form that is used for internal memory.

Output Limitations

Although many BASICs have a PUT or similar command that will store the internal binary form of a number, the only output command available to Applesoft is PRINT. This command is typically used to send data to your video screen or printer, but can also send data to your disk. When PRINT is used for output, it converts data to a string of ASCII (American National Standard Code for Information Interchange) characters. Because the disk is a storage device and not a human-readable display, this conversion to ASCII is unnecessary and presents a real problem if you expect to use direct-access files with any degree of efficiency.

PRINT is the only Applesoft output command and it converts data to ASCII.

In disk operations, file space must be defined for each field or item of data to be stored. If the data stored is in character form, due to the use of PRINT for output, the field size must allow for the maximum possible number length because the range of numbers used in most practical computer applications varies greatly. With DOS, this need to precisely define field lengths in a text file is especially critical when using the "relative-record" addressing method. This form of direct access allows you to move the "position in the file pointer" forward to a specific location on the disk where the data for a given record is stored.

If each record is a fixed length, it is simple to decide how many bytes the pointer must be advanced into the file in order to access a given record. You just multiply the record length by the position of the record relative to the beginning of the file. DOS will make these calculations for you if you specify an L (length) parameter in your OPEN statement and an R (relative-record) parameter in your READ or WRITE statement.

DOS will not enforce your record length, however. If the data you write to a given record proves to be longer than the space defined, DOS will simply write past the allocation and over any data stored in the successive record, destroying its original contents. Keeping track of the field lengths within records is the programmer's responsibility.

About the Author

David Eyes is the product manager for professional software with Hayden Software Company.

www.americanradiohistory.com

Listing 1: *A program to display the decimal values of each of the 5 bytes of the real variable "A." Each variable table entry is 7 bytes long. The first 2 bytes are the characters of the variable name. With a real variable, the next 5 bytes represent the number itself. Running this program will let you input any number into variable "A" and see the different decimal values each of the 5 bytes acquires.*

```
100 A = 0
110 B =  PEEK (105) +  PEEK (106) * 256
120 B = B + 2
130 C = B
140  INPUT A
160  FOR X = 1 TO 5
170  PRINT  PEEK (C);' ';
190 C = C + 1
200  NEXT X
210  PRINT
220  GOTO 130
```

Listing 2: *By inserting these lines into the program in listing 1, you have a crude method of outputting the floating-point representation of a real number to the disk.*

```
150 A$ = ''
180 A$ = A$ +  CHR$ ( PEEK (C))
220  PRINT A$
```

By writing the numeric data to the file in the binary floating-point form, you would gain control over your field and record lengths because each real number would always be 5 bytes long. To do this, the internal DOS routines that read and write data to a file must be accessed. The data is written byte by byte directly from an internal floating-point representation of the number and the conversion to a string of ASCII characters is bypassed.

Using the CHR$ function, for example, it is easy to see how to generate and output any binary data (see listing 1). If you then access the memory locations where the floating-point number is stored and these values are used to generate a string value using CHR$, this string can be output directly to disk with PRINT (see listing 2).

DOS Complications

DOS text files (the only ones supporting direct access) are called "text" files because that is exactly what DOS expects to be put there. The ASCII codes for characters are significant only to 7 bits and DOS uses the eighth, high-order bit of each byte for its own purposes. For DOS to include the full ASCII character set, it has to distinguish the end-of-file marker for text files, 00 hexadecimal, from the ASCII null character, which is also 00 hexadecimal. It is able to do this because the high-order bit of every byte written to a text file is normally set high on output. The null character then becomes 80 hexadecimal.

For our purposes, this action has the unfortunate effect of eliminating one-eighth of the information contained in a stream of floating-point data. DOS complicates things further by setting the same high-order bit low on input when data is being returned from the disk.

The solution to these DOS complications involves saving the status of the high-order bit in each of the 5 bytes to corresponding bits of a sixth byte. This is then made part of the output and the information needed to reconstruct the data in its original form upon return from the disk is retained.

A Machine-Language Answer

The principles involved in this method of binary-format number storage have been illustrated using the example of BASIC PEEKs and CHR$ functions. However, the problem has now reached a level of complexity that requires the speed and efficiency of machine code.

The program CONVERT (see listing 3), written in 6502 assembly language, initializes a USR function that can be accessed from BASIC. (See the Applesoft reference manual for a description of the USR function.) Depending on whether a file has been opened for writing or reading, the routine either encodes the real expression passed in the USR function and writes it to disk or reads and decodes it, restoring the high-order bits, and returns it as the value of the function.

The first segment of code, executed when the program is BRUN at the start of a BASIC program, initializes the pointers to the start of the USR function in locations 0A through 0C hexadecimal. This initialization section also sets the MON C,I,O flags to 0. DOS monitoring is basically meaningless when outputting binary data and may cause undesirable side effects.

The USR function is invoked somewhat differently from BASIC, depending upon whether reading or writing is desired. The file must first have been opened and then selected for the desired operation using DOS. To write a real value to the disk, the expression is passed to the subroutine as the argument of the USR function. To satisfy the syntax, the USR statement appears on the right of the assignment statement, with a dummy variable on the left. To read a value from the disk, a dummy variable is used as the argument of the USR function and the value read is assigned to the variable on the left of the equal sign.

Writing to Disk

When control is passed to the USR routine CONVERT, the program first

www.americanradiohistory.com

Listing 3: *The program CONVERT is called as a USR function to read and write floating-point representations of real variables to the Apple II disk.*

```
LISA 2.5                    CONVERT: FLOATING-POINT DISK I/O


0800                 1            TTL 'CONVERT: FLOATING-POINT DISK I/O'
0800                 2  ;
0800                 3  ;
0800                 4  ;
0800                 5  ;        CONVERT
0800                 6  ;
0800                 7  ;        COPYRIGHT 1981
0800                 8  ;
0800                 9  ;        BY DAVID EYES
0800                10  ;
0800                11  ;        USR function for the Apple II.
0800                12  ;        Reads and writes floating-point
0800                13  ;        representations of real variables
0800                14  ;        to Apple II disk.  For use with
0800                15  ;        direct access, fixed length record
0800                16  ;        disk storage.
0800                17  ;
0800                18  ;
0800                19  ;
0300                20            ORG $300
0300                21            OBJ $800
0093                22  TEMP      EPZ $93
009D                23  FAC       EPZ $9D
00A0                24  CHAR      EPZ $A0
00FF                25  CTRLBYTE  EPZ $FF
0001                26  SIGNFLAG  EPZ %00000001
0300                27  ;
0300                28  ;        RAMTOP must be set to highest
0300                29  ;        available RAM memory location
0300                30  ;
BFFF                31  RAMTOP    EQU $BFFF
9EE0                32  SWITCH    EQU RAMTOP-$211F
A2FC                33  CLOSE     EQU RAMTOP-$1D03
A68C                34  GETBYTE   EQU RAMTOP-$1973
A6D2                35  ERROR     EQU RAMTOP-$192D
AA51                36  STATUS    EQU RAMTOP-$15AE
AA52                37  CSWSTATE  EQU RAMTOP-$15AD
AA5E                38  MONFLAG   EQU RAMTOP-$15A1
EB21                39  PACK      EQU $EB21
EB53                40  ARGTOFAC  EQU $EB53
E9E3                41  MOVEARG   EQU $E9E3
FDED                42  COUT      EQU $FDED
0300                43  ;
0300                44  ;
0300                45  ;        Initialize USR function by
0300                46  ;        moving jump instruction to
0300                47  ;        start of program to page zero
0300                48  ;
0300                49  ;
0300 A9 4C          50            LDA #$4C
0302 85 0A          51            STA $0A
0304 A9 13          52            LDA #ENTER
0306 85 0B          53            STA $0B
0308 A9 03          54            LDA /ENTER
030A 85 0C          55            STA $0C
030C A9 00          56            LDA #$00
030E 8D 5E AA       57            STA MONFLAG          ; Disable mon c,i,o
0311 60             58            RTS
```

Listing 3 continued on page 456

www.americanradiohistory.com

Listing 3 continued:

```
0312                    59          PAG
0312                    60  ;
0312                    61  ;
0312                    62  ;       Main program
0312                    63  ;
0312                    64  ;
0312 00                 65  XSAVE   HEX 00              ; X-register save
0313                    66  ;
0313                    67  ENTER:
0313 AD 51 AA           68          LDA STATUS          ; See if a READ
0316                    69  ;                             command is active
0316 C9 01              70          CMP #$01
0318 D0 3A              71          BNE WRITE
031A                    72  ;
031A                    73  ;
031A                    74  ;
031A                    75  ;       READ gets control byte from
031A                    76  ;       disk, then uses it to restore
031A                    77  ;       high-order bit of data coming
031A                    78  ;       in from disk.  Returns a real
031A                    79  ;       value to USR function.
031A                    80  ;
031A                    81  ;
031A                    82  ;
031A                    83  READ:
031A 20 8C A6           84          JSR GETBYTE         ; Get next textfile byte
031D D0 03              85          BNE >1
031F 4C 93 03           86          JMP ENDDATA         ; If value is $00,
0322                    87  ;                             then end of file
0322                    88  ^1:
0322 0A                 89          ASL                 ; skip unused bits
0323 0A                 90          ASL
0324 0A                 91          ASL
0325 85 FF              92          STA CTRLBYTE
0327 A2 00              93          LDX #$00
0329                    94  ^2:
0329 8E 12 03           95          STX XSAVE
032C 20 8C A6           96          JSR GETBYTE         ; Get next byte
032F D0 03              97          BNE >3
0331 4C 93 03           98          JMP ENDDATA         ; Test end of file
0334                    99  ^3:
0334 AE 12 03          100          LDX XSAVE
0337 06 FF             101          ASL CTRLBYTE        ; Advance next bit
0339                   102  ;                             into carry
0339 B0 02             103          BCS >4
033B 49 80             104          EOR #%10000000      ; Set data bit low
033D                   105  ;                             if control bit low
033D                   106  ^4:
033D 95 93             107          STA TEMP,X          ; Save
033F E8                108          INX
0340 E0 05             109          CPX #$05
0342 D0 E5             110          BNE <2
0344 A9 93             111          LDA #TEMP           ; Set up registers
0346 A0 00             112          LDY /TEMP           ; for call to MOVEARG
0348 20 E3 E9          113          JSR MOVEARG         ; Move TEMP to ARG
034B 20 53 EB          114          JSR ARGTOFAC        ; Move ARG to FAC
034E A9 00             115          LDA #$00
0350 8D 52 AA          116          STA CSWSTATE        ; Set CSWSTATE TO
0353                   117  ;                             'start of line'
0353 60                118          RTS
0354                   119          PAG
0354                   120  ;
0354                   121  ;
0354                   122  ;
```


www.americanradiohistory.com

Listing 3 continued:

```
0354                 123  ;        WRITE first encodes control byte
0354                 124  ;        then puts real data passed by USR
0354                 125  ;        onto disk.
0354                 126  ;
0354                 127  ;
0354                 128  ;
0354                 129  WRITE:
0354 20 21 EB        130              JSR PACK              ; Move and pack floating-point
0357                 131  ;                                 accumulator to TEMP
0357 A9 01           132              LDA #SIGNFLAG
0359 85 FF           133              STA CTRLBYTE          ; Initialize control byte
035B A2 00           134              LDX #$00
035D                 135  ^1:
035D 06 FF           136              ASL CTRLBYTE          ; Advance to next position
035F B5 93           137              LDA TEMP,X
0361 10 06           138              BPL >2
0363 A9 01           139              LDA #SIGNFLAG
0365 05 FF           140              ORA CTRLBYTE          ; Set bit if high
0367 85 FF           141              STA CTRLBYTE
0369                 142  ^2:
0369 E8              143              INX
036A E0 05           144              CPX #$05
036C D0 EF           145              BNE <1
036E                 146  ;                                 Begin write
036E A9 04           147              LDA #$04
0370 8D 52 AA        148              STA CSWSTATE          ; Set output state to 'write'
0373 A5 FF           149              LDA CTRLBYTE          ; Control byte is written first
0375 09 80           150              ORA #$80              ; Set high-order bit
0377 20 ED FD        151              JSR COUT              ; Write it
037A A2 00           152              LDX #00
037C                 153  ^3:
037C A9 04           154              LDA #$04
037E 8D 52 AA        155              STA CSWSTATE
0381 B5 93           156              LDA TEMP,X
0383 09 80           157              ORA #$80
0385 20 ED FD        158              JSR COUT
0388 E8              159              INX
0389 E0 05           160              CPX #$05
038B D0 EF           161              BNE <3
038D A9 05           162              LDA #$05
038F 8D 52 AA        163              STA CSWSTATE
0392 60              164              RTS
0393                 165  ;                                 End of data error
0393                 166  ENDDATA:
0393 20 FC A2        167              JSR CLOSE             ; Close file
0396 20 E0 9E        168              JSR SWITCH            ; Switch i/o pointers
0399 A9 05           169              LDA #$05              ; Set error code to 5
039B 4C D2 A6        170              JMP ERROR
039E                 171              END

***** END OF ASSEMBLY
```

checks the setting of the DOS READ status flag. If the file has been opened for reading, the low-order bit will be set to 1. With this check, either the WRITE or READ routine is executed.

WRITE begins by calling the Applesoft PACK routine that moves the value in the floating-point accumulator into one of the zero-page floating-point registers in the packed (5-byte) form. The USR function has placed the value of its argument in the primary floating-point accumulator (in an expanded 6-byte form).

As explained above, the contents of the high-order bit will be set high when writing to a text file. Before this is done, however, these values must be preserved in the location labeled CRTLBYTE. This location is first set to the value 1. Each of the five locations of the real number in TEMP is stepped through. If the high-order bit is set, the sign flag in the processor status register will likewise be set and the value in CRTLBYTE will be ORed with the single digit in SIGNFLAG. CRTLBYTE is shifted left one position during each iteration; each of the 5 bits in CRTLBYTE thus comes to

www.americanradiohistory.com

correspond to the setting of the high-order bits in the 5 data bytes that comprise the floating-point number.

With the control byte encoded, data may now be written to the file beginning with the control byte. Because DOS is monitoring the output, the CSWSTATE (character output switch state) location must first be set to 4, the "write data to file" state. This is done before each byte is written, canceling the effect of any carriage return that may appear in the binary data. Thus, DOS is prevented from prematurely exiting the WRITE mode if it next encounters data that it could interpret as a Control-D character. (The sequence carriage return and Control-D signals that the characters that follow are to be interpreted as a DOS command.)

Before the WRITE, which is accomplished by a call to COUT, the data in the accumulator is ORed with 80 hexadecimal, permitting DOS to detect an end-of-data error during a subsequent READ.

Having written the 5 bytes of binary data that comprise the floating-point number, the CSWSTATE is set to 5, the beginning of a write data line, so that any DOS commands invoked via Control-D after the USR call will be detected. This has the same result as ending a WRITE with a carriage return without actually having done so.

Reading Binary Data

The READ routine, to which the USR function branches if a DOS READ command is active, reverses this process. The control byte is read first, then shifted left three times to advance past the unused bits, leaving the first "control" bit in the carry flag. As the data comes in with the high-order bit set, it will be exclusive-ORed with 80 hexadecimal, setting it low if the corresponding bit in the control byte is also low. With the control bit shifted into the carry flag during each iteration of the loop that reads in the rest of the data, the correct value is restored to the real number.

As each byte is read in, it is compared with the end-of-data marker, 00 hexadecimal, to determine if the end of the file has been reached. This is a possibility if the file pointer has been improperly positioned. If this is the case, control jumps to the routine ENDDATA, which, via a call to the appropriate DOS routine, closes the file and either prints the "end-of-data" error message or passes the error code to an Applesoft ONERR handler.

Otherwise, as the number is being read in, it is stored in the register TEMP. After the high-order bits have been restored to their proper settings, the number is moved to the floating-point accumulator via calls to the Applesoft routines MOVEARG and ARGTOFAC. Finally, the CSWSTATE is set to 0, "start of line," to monitor any DOS commands that may follow the USR statement. With the restored real number in the floating-point accumulator, the USR function will return to BASIC and assign this value to the real variable on the left of the equal sign.

PROGRAMMERS: MAKE YOUR LIFE BEARABLE . . .

with FLX-I-SORT

FLX-I-SORT is a package designed to save programmers time. With FLX-I-SORT, you are able to sort disk files of any size rapidly without tying up large amounts of memory. FLX-I-SORT uses a modified "Singleton" algorithm and is written in assembly language to achieve maximum speed and control. FLX-I-SORT uses a simple command line to control the sort. This allows easy modification to sort a different file or use different keys for the sort. When used with MBASIC, FLX-I-SORT is an invaluable tool for programmers and users. FLX-I-SORT is available only from Bear Computers.

MBASIC is a registered trademark of Microsoft Corporation.

PRICE $179.00

(Add $3.50 for shipping and handling)

Here's How to Order:
- See your authorized Bear Dealer
- CALL: (309) 828-3011 or (309) 828-6031
- Master Card and Visa accepted
- Send check or money order

Bear Computers, Inc.
102 N. Center
Bloomington, Illinois 61701

a message to our subscribers

From time to time we make the BYTE subscriber list available to other companies who wish to send our subscribers promotional material about their products. We take great care to screen these companies, choosing only those who are reputable, and whose products, services or information we feel would be of interest to you. Direct mail is an efficient medium for presenting the latest personal computer goods and services to our subscribers.

Many BYTE subscribers appreciate this controlled use of our mailing list, and look forward to finding information of interest to them in the mail. Used are our subscribers' names and addresses only (no other information we may have is ever given).

While we believe the distribution of this information is of benefit to our subscribers, we firmly respect the wishes of any subscriber who does not want to receive such promotional literature. Should you wish to restrict the use of your name, simply send your request to the following address.

BYTE Publications Inc
Attn: Circulation Department
70 Main St
Peterborough NH
03458

Circle 125 on inquiry card.

www.americanradiohistory.com

Listing 4: *A sample program showing how the USR function is used.*

```
10 D$ =  CHR$ (4)
20  PRINT D$;'BRUN CONVERT.OBJ,A$300'
30  PRINT D$;'OPEN TEST'
40  PRINT D$;'WRITE TEST'
50  FOR X = 1 TO 10
60  READ A,A$
70 B =  USR (A)
80  PRINT A$
90  NEXT X
100  PRINT D$;'CLOSE TEST'
110  PRINT D$;'OPEN TEST,L12'
120  PRINT D$
130  INPUT 'WHICH RECORD WOULD YOU LIKE? ';R
140  IF R = 0 THEN 220
150 R = R - 1
160  PRINT D$;'READ TEST,R';R
170 A =  USR (B)
180  INPUT A$
190  PRINT 'THE CONTENTS OF RECORD ';R + 1;' ARE: '
200  PRINT A,A$
210  GOTO 120
220  PRINT D$;'CLOSE TEST'
230  DATA  233.44, APPLE, 5, HOUSE, .001
240  DATA  WRITE, 455.002, 12345, 233.1, WORDS
250  DATA  5, 54321, -23, HAPPY, -2E+23
260  DATA  MOUSE, 0, CLOCK, 3.123456, HELLO
```

USR and Applesoft

The program DIRECT (see listing 4) demonstrates how this function can be used from Applesoft. First, the program CONVERT is loaded into memory at location 300 hexadecimal with BRUN, and the initialization procedure is executed. A small random-access file is then built by reading 10 values in the DATA statements and writing them to the disk file TEST. The role of the dummy variables in the USR has been explained above. For the sake of illustration, a string field is also written to the file immediately following the USR call to show how character data and binary numeric data can be mixed as desired to build a record. Note that as the data is written to the file sequentially, with each record being filled completely, it is not necessary to make calls to POSITION by specifying a record parameter with each WRITE. And since the binary floating-point number is always 6 bytes, there is no need for a field delimiter such as a carriage return. Therefore, care must be taken when mixing USR with PRINT and INPUT in a given record.

Once the file has been built, the direct-access feature can be seen when the user is prompted for a record selection. (Although DOS numbers records from 0, they are numbered here from 1. An entry of 0 exits the loop.)

When the file is reopened, a length parameter of 12 is used: a 6-byte real field, consisting of control byte and data, and a 5-byte string followed by a carriage return as a field delimiter. The READ command actually sets the record number to be selected. Having been positioned to the appropriate location in the file, USR fetches the next 6 bytes and translates them into a real variable.

This simple program illustrates the principles of direct access of binary-format numeric data using the machine-language program CONVERT. I hope these functions will make possible more ambitious applications requiring direct access, as well as allow more efficient use of disk storage. ■

References

1. Luebbert, William F. *What's Where in the Apple: An Atlas to the Apple Computer.* Chelmsford, MA: Micro Ink, 1981.
2. Worth, Don and Pieter Lechner. *Beneath Apple DOS.* Reseda, CA: Quality Software, 1981.

GET FULL
POWER
FROM YOUR Z80 CPU!

Run your Z80-based computer 4 to 10 times faster using Assembler instead of BASIC or other high-level languages. Write your first Assembler Language program in only a few hours using the ICE80 Utility Library then watch your computer run at full throttle! ICE80 is a software toolbox including over 75 callable functions to help you write professional software. The ICE80 package contains source language for 5 sample programs and a 40 page reference manual chock-full of coding examples. You'll be amazed at your computer's performance and YOUR new progamming power. For CP/M systems only. Send check or money order for $40. (Va. residents add 4% state tax.)

ICE CORPORATION
100 Timber Oak Court, Suite B3
Lynchburg, Virginia 24502

ICE80 source code available for $24 when ordered with ICE80 Utility Library.

Circle 496 on inquiry card.

PERIPHERALS
FOR THE APPLE

Quality Inexpensive Apple Compatible Peripherals with a Full One Year Warranty

	EACH	BARE BOARD
Apple Compatible Disk Drive (5¼")	$249	
Disk Controller Card (DOS 3.2-3.3)	69	$21
80 Column Board	149	29
Z80 Softcard Replacement	119	29
Printer Interface with 16K Buffer and Graphics	119	28
New SA400L Drives (90 Day Warranty)	169	
Prowriter 8510 AP	475	
8510/8023 Ribbon	6	
B/H Apple II+	989	

COLORADO COMPUTER PERIPHERALS
R.R. 6, Box 7-D, Golden, Colorado 80401
(303) 278-7172 (303) 366-5267

Circle 494 on inquiry card.

flexible discs
LOWEST PRICES
wabash
MEMOREX
Scotch
DEALER INQUIRIES INVITED
FOR ORDERS CALL COLLECT
(614) 866-3462
MasterCard VISA
datamaster
A DIVISION OF
KOP International Corp.
6145 ZIMMER DR., COLUMBUS, OHIO 43227

Circle 497 on inquiry card.

www.americanradiohistory.com

"Why should I think of Lanier when I think of the office of the future?"

Corporate information planners have a legitimate need to know the direction of a prominent word processing supplier. Lanier's direction is total office automation. We offer the technology to provide advanced information processing resources in a distributed data processing environment.

"Will Lanier be compatible with my mainframe computer?"

"Lanier systems can be used today as asynchronous or bisynchronous terminals to communicate with a wide variety of computers and other Lanier systems. And Lanier is implementing SNA/SDLC protocols to help you get all the information you need to do your job more productively."

"How do you plan to tie into the local area network we choose?"

"We'll be able to connect to the leading local area networks of the office of the future, sharing words, data and voice – not proposing another standard to add to your networking confusion. And we will have electronic mail to get that information anywhere in the world – instantly."

"How do I know Lanier will have what we need next year and the year after that?"

"Because we've developed a master plan for a layered architecture. By isolating functions to particular layers, new technologies can be introduced easily to the layers directly affected by that technology. That makes the systems easy to maintain, upgrade and change."

"But the increasing needs of our growing business require more than word processing..."

"Lanier equipment is multifunctional. We have the applications packages you need right now for records management, mathematical functions, bar graphs and statistical typing. Since our products are multitasking, your staff can type an inventory report while integrating a list of names, addresses and individual information into a form letter in the background, and print out a new product proposal – all at the same time.

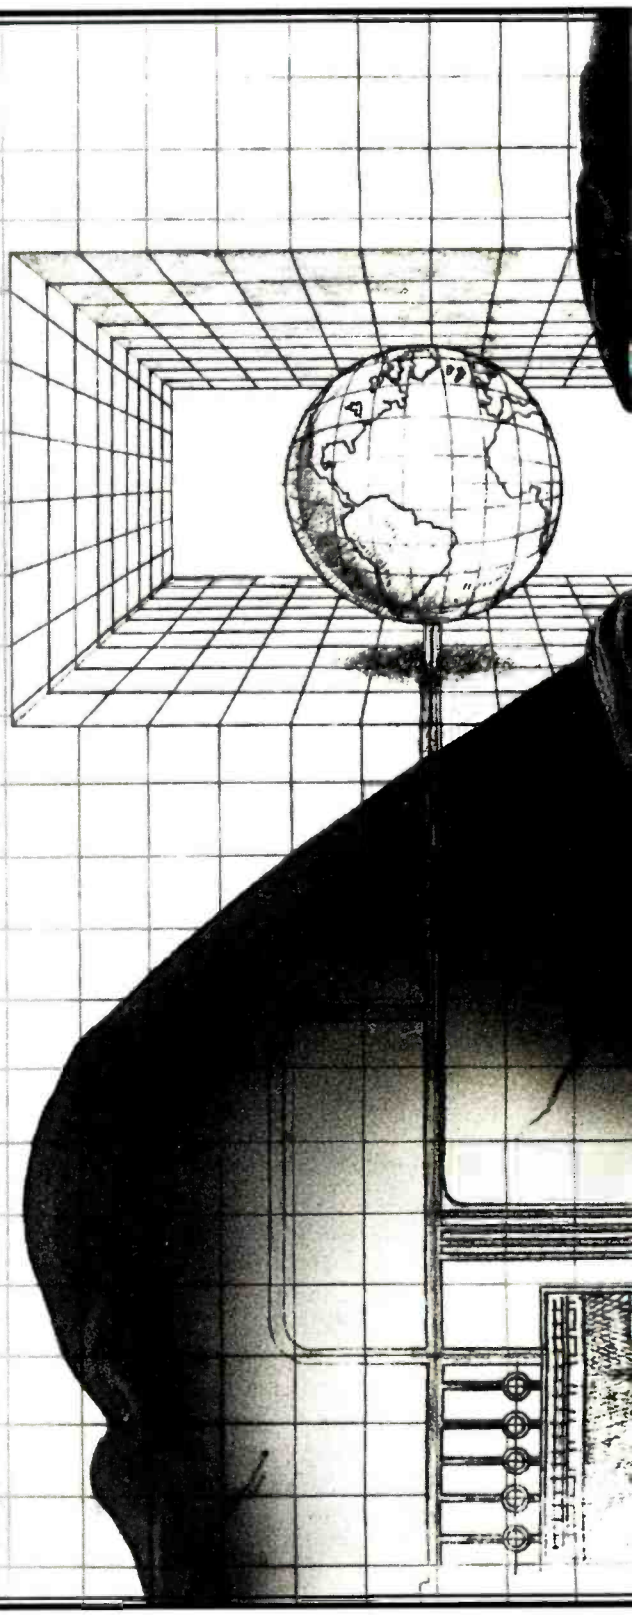

© 1982 Lanier Business Products, Inc.

www.americanradiohistory.com

"Glad you asked."

Wes Cantrell, President, Lanier Business Products, Inc.

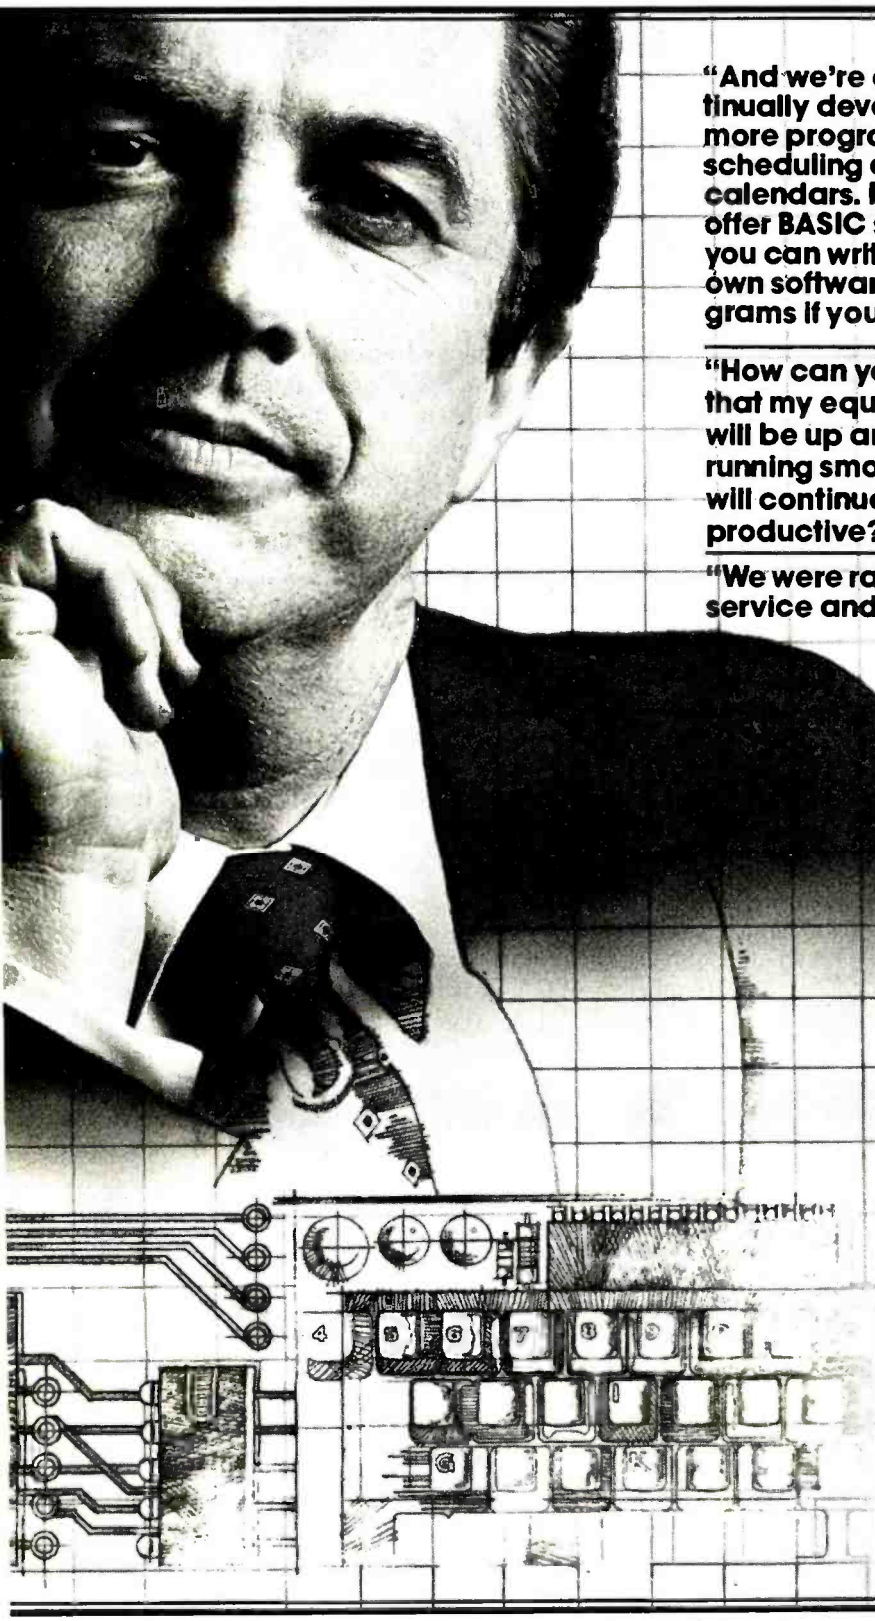

"And we're continually developing more programs. Like scheduling and calendars. Plus, we offer BASIC so that you can write your own software programs if you prefer."

"How can you assure that my equipment will be up and running smoothly and will continue to be productive?"

"We were rated #1 in service and support by Quantum Science in 1980. That's because we're committed to making sure you get the help you need to be more productive today – and tomorrow. We want you to know that Lanier is a disciplined, applications-oriented office automation vendor. We've been helping offices be more productive since 1934. We've been leaders in the field of word processing and spoken word processing for the past 47 years. And now we are expanding our scope into total office automation for the future. We think you'll be needing us."

Send us this coupon, or call Jennifer Scott at (800) 241-1706 for more information about Lanier's electronic office systems. Except in Alaska and Hawaii. In Georgia, call collect: (404) 321-1244.

Send to: Lanier Business Products, Inc.
1700 Chantilly Dr. N.E.
Atlanta, GA 30324
Attn: Jennifer Scott

Name

Title

Phone Best Time to Call

Firm

Address County

City State Zip

Feb. '83 Byte 4 76 B B3

We'll change your mind about the future. Right here and now. **LANIER®**

Circle 242 on inquiry card.

www.americanradiohistory.com

Adding a Trace to North Star BASIC

Steve Stern
Genigraphics Corp.
Building 1, Room 107
Electronics Park
POB 591
Liverpool, NY 13088

One drawback of North Star BASIC is that it lacks the trace feature found in many other BASICs. This feature is handy in debugging because it allows you to watch the flow of control through your program as it is executing.

I added a trace to my version of North Star BASIC (Release 5), and this System Note provides you with the programs involved.

Without a listing of the BASIC interpreter, it would be difficult, if not impossible, to add new commands directly. Fortunately, North Star provides the "hook" required to turn on and off the trace via the "Control-C" routine. This routine starts in hexadecimal memory location 2964 and is entered after each line of the BASIC program is interpreted and executed. By replacing the first few bytes of the Control-C routine with a jump out to a user-supplied program, it is possible to gain control after each BASIC line is executed.

Due to the fact that the trace routine needs to print out the current BASIC line number, all that remains is a way to retrieve that value. After some trial and error using a monitor program, I discovered that the line number's binary value was stored in the 2 bytes starting at location 59C4. With this information, writing a user-callable assembly-language package that would print out the line number after each line was executed was straightforward. Listing 1 is the routine that accomplishes this. There are three entry points: one each for turning the trace feature on and off; one (not called by the user) for printing the trace.

Listing 2 is a subroutine that the trace program calls to convert the internal binary representation of the line number to ASCII (American National Standard Code for Information Interchange). It was taken from the run-time utilities found in *The BYTE Book of Pascal* (Blaise Liffick, editor; Peterborough NH: BYTE Books, 1979). Listing 3 is a hexadecimal dump of the trace package when it's link-loaded at hexadecimal location 1000. To use the package, the BASIC program must call the assembly-language routine at PLACIT to start the trace and at DELTRC to delete the trace. For the example in listing 3 the BASIC statements would look like this:

```
100 Y = CALL(4096) \ REM TURN ON TRACE \
    Y IS A DUMMY VARIABLE
```

and

```
200 Y = CALL(4110) \ REM TURN OFF TRACE
```

Listing 4 is an example of a simple BASIC program using the trace feature. It shows how the results of the actual trace would appear. ■

ECT™
Building Blocks for Microcomputer Systems, Dedicated Controllers and Test Equipment



S-100 64K STATIC RAM



ECT's 64K STATIC RAM is a low power fully static 64K x 8 bit S-100 Bus Memory Board. 2716 EPROM's can be intermixed with the RAM's.

$399.00

ECT™ Specializing in Quality Microcomputer Hardware
Industrial • Educational • Small Business • Personal
Card Cages, Power Supplies, Mainframes, CPU's, Memory, I/O, OEM Variations

ELECTRONIC CONTROL TECHNOLOGY, INC.
763 Ramsey Ave., Hillside, NJ 07205 (201) 686-8080

Circle 169 on inquiry card.

www.americanradiohistory.com

Listing 1: *Machine-language program that implements a trace function in North Star BASIC. By modifying the correct memory locations, the user can force the BASIC interpreter to jump to this routine after executing each program line.*

```
MAKRO ASSEMBLER AMA.2
0000                ODSPASC     LIBRY
0000                DSPASC      EXTRN
0000                ;PLACE THE TRAP
0000                PLACIT      ENTRY
0000  216429                  LXI         H,2964H
0003  3EC3                    MVI         A,0C3H ; OP-CODE FOR JUMP
0005  77                      MOV         M,A    ; STORE
0006  23                      INX         H
0007  111E00                  LXI         D,TRCSTRT
000A  73                      MOV         M,E    ; LSH OF JUMP ADDRESS
000B  23                      INX         H
000C  72                      MOV         M,D    ; MSH OF JUMP ADDRESS
000D  C9                      RET         ; TRAP HAS BEEN PLACED
000E                DELTRC      ENTRY       ; ENTER HERE TO DELETE TRACE
000E  116429                  LXI         D,02964H
0011  211A00                  LXI         H,ORIGCODE ; ADDR OF COPY OF ORIGINAL C
ODE
0014  010400                  LXI         B,4
0017  EDB0                    LDIR
0019  C9                      RET
001A  DB03          ORIGCODE  IN          3
001C  E602                    ANI         2
001E                TRCSTRT     ENTRY       ; ENTER HERE TO PRINT TRACE
001E  2AC459                  LHLD        059C4H ; THIS IS THE ADDR W/THE LINE #
0021  2B                      DCX         H
0022  7E                      MOV         A,M
0023  FE5C                    CPI         5CH ; CHECK FOR SLASH (\)
0025  281E                    JRZ         DONE ; IF SO, DON'T PRINT ANYTHING
0027  325300                  STA         BYTE2
002A  2B                      DCX         H
002B  7E                      MOV         A,M
002C  325700                  STA         BYTE1
002F  215900                  LXI         H,MSG
0032  0E07                    MVI         C,7 ; C IS CHARACTER COUNT
0034  CD4C00                  CALL        PRTLOOP ; TO PRINT 'AT'
0037  2A5700                  LHLD        BYTE1 ; DSPASC EXPECTS INPUT IN HL
003A  CD0000                  CALL        DSPASC
003D  215900                  LXI         H,MSG
0040  0E03                    MVI         C,3
0042  CD4C00                  CALL        PRTLOOP
0045  DB03         DONE      IN          3
0047  E602                    ANI         2
0049  F26829                  JP          2968H
004C  46            PRTLOOP   MOV         B,M ; PUT THE CHARACTER IN B
004D  AF                      XRA         A ; ZERO OUT A
004E  CD0D20                  CALL        0200DH ; CHAR OUT
0051  0D                      DCR         C ; DECREMENT COUNT
0052  41                      MOV         B,C ; TO TEST
0053  23                      INX         H ; JUST IN CASE
0054  10F6                    DJNZ        PRTLOOP
0056  C9                      RET
0057  00          BYTE1     DB          0
0058  00          BYTE2     DB          0
0059  0D0A2041    MSG       DB          0DH,0AH,' AT '
      5420
MAKRO ASSEMBLER AMA.2
0000  ERRORS
SYMBOL TABLE
```

Listing 1 continued on page 464

www.americanradiohistory.com

Listing 1 continued:

```
BYTE1       0057 01  BYTE2       0058 01  DELTRC      000E 01  DONE        0045 01
DSPASC      003C 03  MSG         0059 01  ODSPASC     0000 83  ORIGCODE    001A 01
PLACIT      0000 01  PRTLOOP     004C 01  TRCSTRT     001E 01
```

Listing 2: *Subroutine called by the main program to convert BASIC line numbers, stored in binary form, into ASCII characters.*

```
MAKRO ASSEMBLER AMA.2
0000                ;TAKEN FROM 'THE BYTE BOOK OF PASCAL' PAGES 207-210
0000                ; THIS IS A SUBSET OF THE PASCAL RUNTIME ROUTINES WHICH
0000                ; CONVERTS BINARY DATA TO ASCII, AND PRINTS IT OUT.  THE
0000                ; INPUT IS A 16-BIT QUANTITY IN THE H-L REGISTER PAIR.
0000                ; THE OUTPUT IS THE ASCII REPRESENTATION ON THE CRT.
0000                DSPASC      ENTRY       ; THIS IS LOCATION 187D
0000                ;                          IN THE REFERENCE LISTING
0000  AF                        XRA         A
0001  3D                        DCR         A
0002  F5                        PUSH        PSW
0003  A4                        ANA         H
0004  F20F00                    JP          Y3
0007  062D                      MVI         B,'-'
0009  CD0D20                    CALL        OUTP
000C  CD2800                    CALL        NEGH
000F  010A00      Y3            LXI         B,10
0012  CD6D00                    CALL        DIV16
0015  3E30                      MVI         A,30H
0017  83                        ADD         E
0018  F5                        PUSH        PSW
0019  7C                        MOV         A,H
001A  B5                        ORA         L
001B  C20F00                    JNZ         Y3
001E  F1                        POP         PSW
001F  47          WR            MOV         B,A
0020  CD0D20                    CALL        OUTP
0023  F1                        POP         PSW
0024  F21F00                    JP          WR
0027  C9                        RET
0028                NEGH        ENTRY
0028  AF                        XRA         A
0029  95                        SUB         L
002A  6F                        MOV         L,A
002B  9C                        SBB         H
002C  95                        SUB         L
002D  67                        MOV         H,A
002E  D680                      SUI         80H
0030  B5                        ORA         L
0031  C0                        RNZ
0032  C33F00                    JMP         OVFL
0035                ;
0035                NEGB        ENTRY
0035  AF                        XRA         A
0036  91                        SUB         C
0037  4F                        MOV         C,A
0038  98                        SBB         B
0039  91                        SUB         C
003A  47                        MOV         B,A
003B  D680                      SUI         80H
003D  B1                        ORA         C
003E  C0                        RNZ
003F                OVFL
```

Listing 2 continued on page 468

www.americanradiohistory.com

The Computer Book Club®

"The ONLY Book Club for micro users"

Play games . . . develop new programming skills . . . organize your finances . . . earn extra income . . . even build your own microcomputer . . .

HAVE IT ALL FOR ONLY $2.95

Select any 5 books, pay only $2.95

(a value up to $102.75) **when you join The Computer Book Club®!**

1480
List $22.95

1468
List $18.95

1394
List $15.95

1160
List $13.95

1398
List $16.95

1299
List $16.95

1391
List $17.95

337
List $19.95

1195
List $13.95

1251
List $16.95

1199
List $18.95



841
List $6.95 (paper)



1050
List $12.95

1276
List $15.95

1396
List $13.95

1369
List $21.95

1111
List $15.95

1293
List $15.95

338
List $14.95



1045
List $13.95

1108
List $14.95

1423
List $17.95



1496
List $17.95

1169
List $17.95

1205
List $16.95

1085
List $14.95

1406
List $17.95

1183
List $14.95

1295
List $16.95

1506
List $12.95

7 very good reasons to try The Computer Book Club®

Blue Ridge Summit, PA 17214

- **Reduced Member Prices.** Save 20% to 75% on books sure to increase your computer know-how
- **Satisfaction Guaranteed.** All books returnable within 10 days without obligation
- **ClubNews Bulletins.** All about current selections—mains, alternates, extras—plus bonus offers. Comes 13 times a year with dozens of up-to-the-minute titles you can pick from
- **"Automatic Order."** Do nothing, and the Main selection will be shipped automatically! But . . . if you want an Alternate Selection—or no books at all—we'll follow the instructions you give on the reply form provided with every News Bulletin
- **Continuing Bene its.** Get a Dividend Certificate with every book purchased after fulfilling membership obligation, and qualify for discounts on many other volumes
- **Extra Bonuses.** Take advantage of added-value promotions, plus special discounts on software, games, and more
- **Exceptional Quality.** All books are first-rate publisher's editions, filled with useful, up-to-the-minute information

The Computer Book Club®

Blue Ridge Summit, PA 17214

Please accept my membership in The Computer Book Club and send the 5 volumes circled below, billing me $2.95 plus shipping and handling charges. If not satisfied, I may return the books within ten days without obligation and have my membership cancelled. I agree to purchase 4 or more books at reduced Club prices (plus shipping/handling) during the next 12 months, and may resign any time thereafter.

337 338 841 1045 1050 1085 1108
1111 1160 1169 1183 1195 1199 1205 1251
1276 1293 1295 1299 1369 1391 1394
1396 1398 1406 1423 1468 1480 1496 1506

Name _____ Phone _____

Address _____

City _____

State _____ Zip _____

(Valid for new members only. Foreign and Canada add 20%. Orders outside U.S. or Canada must be prepaid with international money orders in U.S. dollars). This order subject to acceptance by The Computer Book Club. BY-383

Circle 412 on inquiry card.

www.americanradiohistory.com

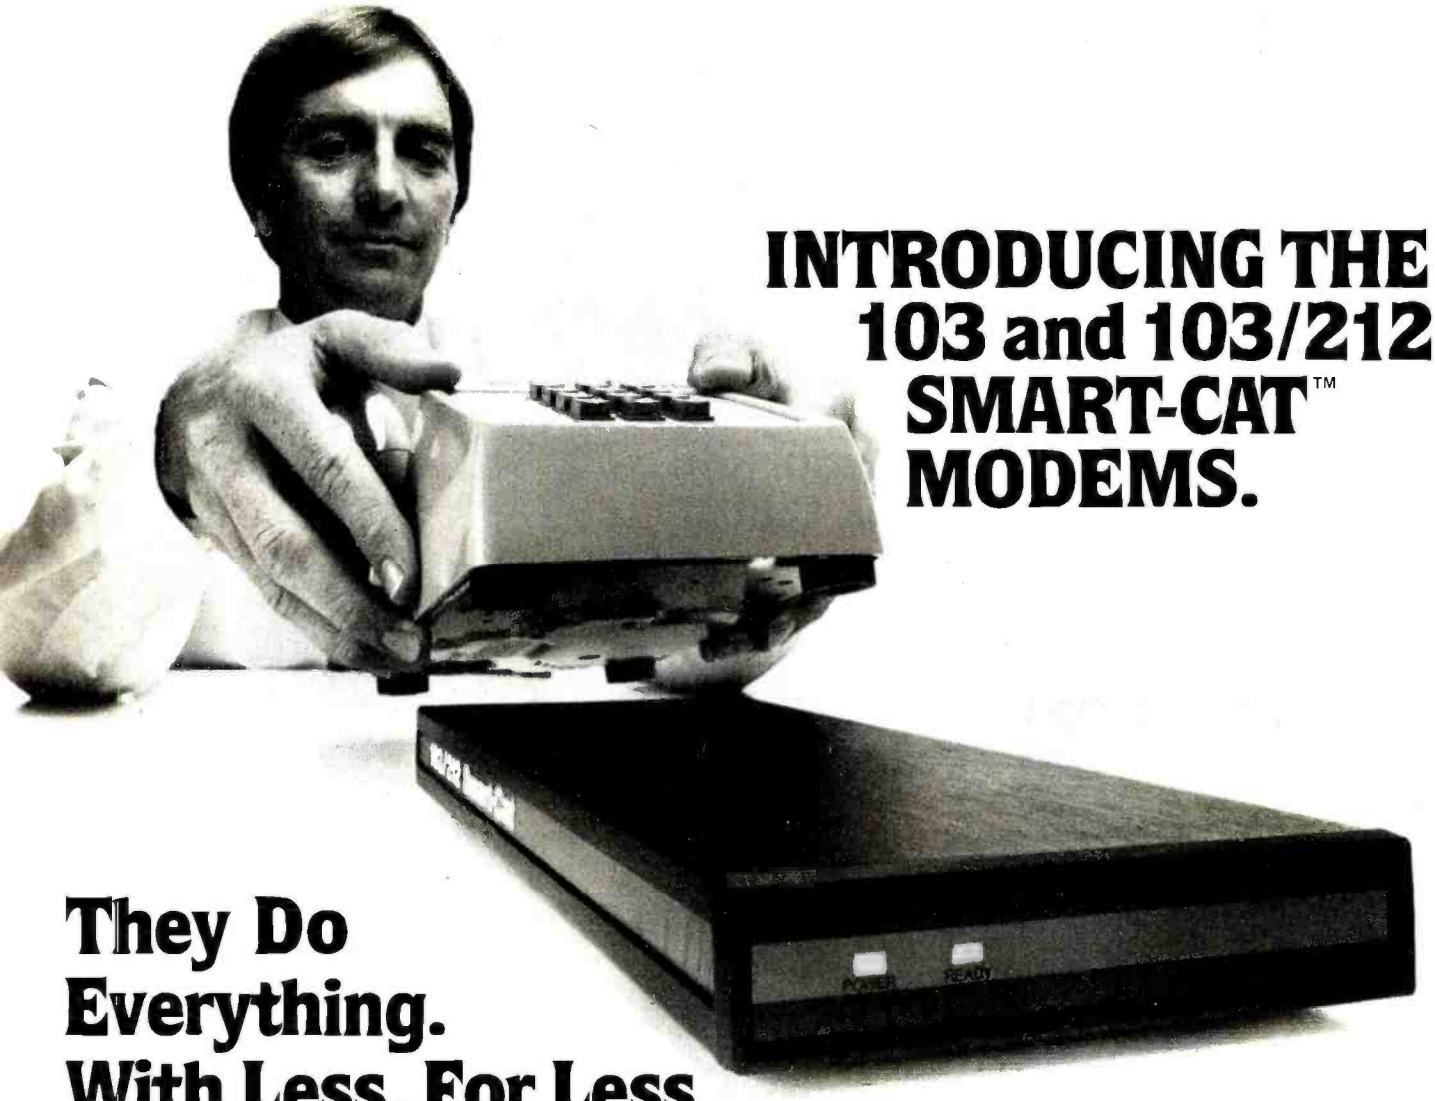

INTRODUCING THE 103 and 103/212 SMART-CAT™ MODEMS.

They Do Everything. With Less. For Less.

Take your pick. With either one, you'll get two very important advantages.

First, each is the best modem in its class. They do more, do it easier and do it in less space. The reason: our LSI technology is state-of-the-art. Our Smart-Cats run better and cooler—and will for years.

Second, you can get your hands on either one of them right now. No waiting. Your local dealer has a shelf full.

The price is something else, too. Suggested retail:

The 103/212 Smart-Cat $595.

The 103 Smart-Cat $249.

New Smart-Cat 103 and 103/212 modems.

See your dealer today and get yours. He does have a bunch, but it's not unlimited.

SMART-CAT MODEM FEATURES:

- Built-in Dialer (Touch-Tone or Rotary)
- Auto Answer
- Direct Connect
- Analog & Digital Loopback Test
- Extensive Software Command Set
- Busy Detect (Allows Modem To Be Programmed To Redial)
- 103 Smart-Cat Modem: 300 Baud, Full Duplex
- 103/212 Smart-Cat Modem: 300 or 1200 Baud, Full Duplex

Novation

18664 Oxnard Street, Tarzana, CA 91356

(800) 423-5419

In California: (213) 996-5060

Circle 317 on Inquiry card.

www.americanradiohistory.com

Look at what the best modem has been reduced to.

Our engineers have come up with some state-of-the-art LSI technology and a whole new modem.

It's smaller. J-Cat is about 1/5th the size of an ordinary modem. Easy to stick-on, tuck-in, put anywhere you want.

It's better. J-Cat does the things you need for professional performance. No fussing to get it into the right answer or originate mode; it does it automatically. LED's show you status; and audio "beeps" tell you when you reach a busy signal, detect a carrier, get a dial tone, etc.

And you can hook it into any modular RJ11C phone jack.

It costs less. If you've shopped around, you know a modem with close to these features costs $250 or more. Our LSI technology has let us do the right thing with the price, too. Suggested retail—$149.

Smaller is definitely better.

See your dealer. He has them right now.

Introducing the Novation J-CAT™

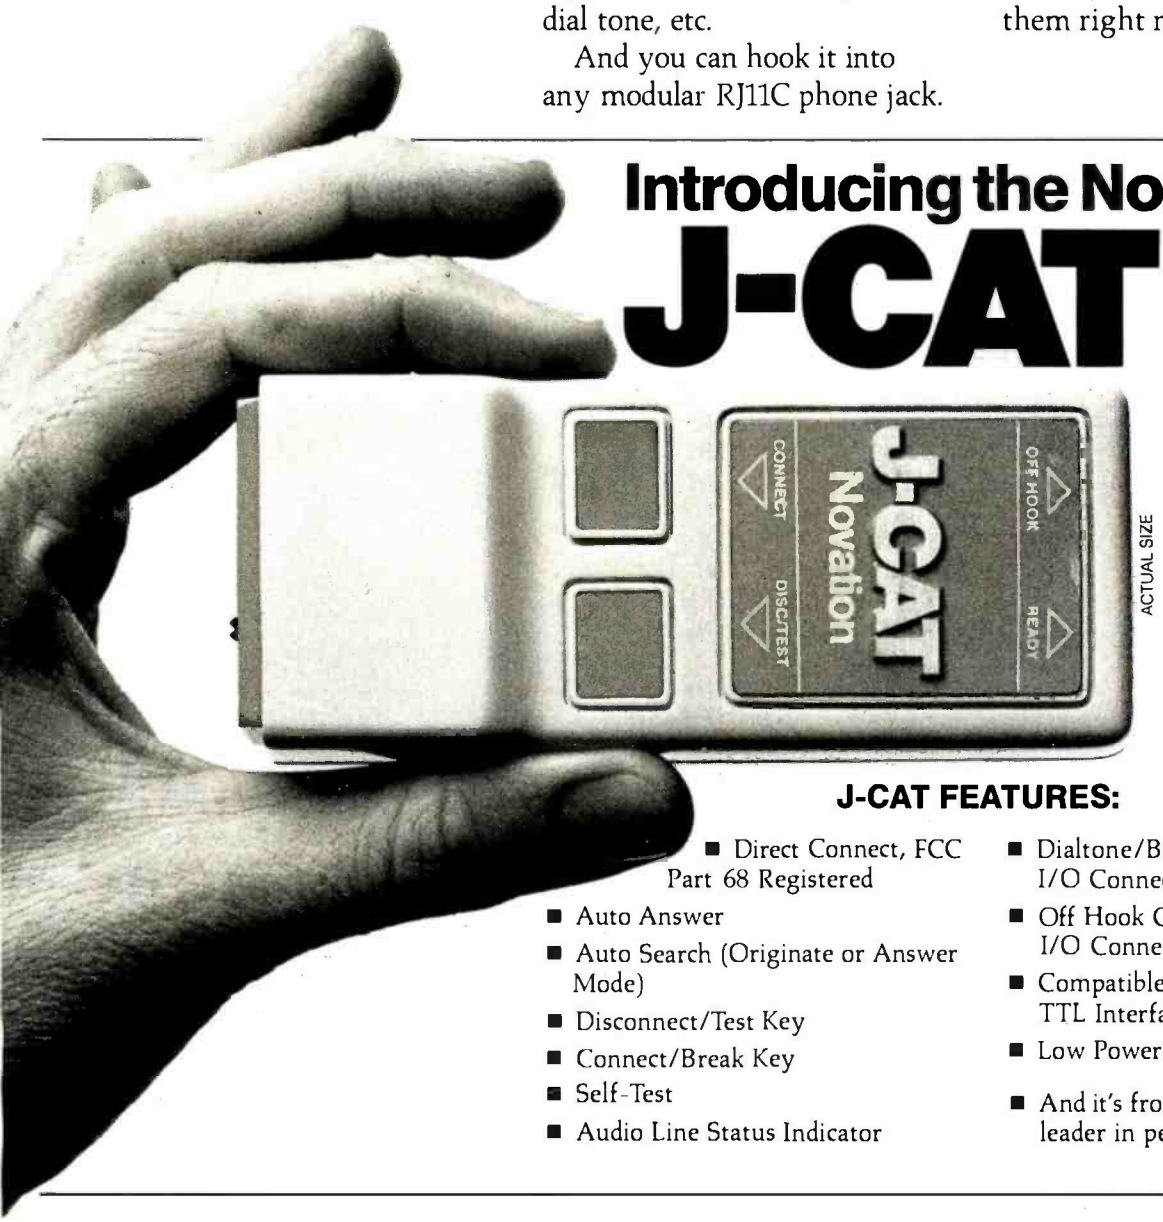

J-CAT FEATURES:

- Direct Connect, FCC Part 68 Registered
- Auto Answer
- Auto Search (Originate or Answer Mode)
- Disconnect/Test Key
- Connect/Break Key
- Self-Test
- Audio Line Status Indicator
- Dialtone/Busy Status at Serial I/O Connector
- Off Hook Control at Serial I/O Connector
- Compatible With EIA-RS232C or TTL Interfaces
- Low Power
- And it's from Novation, the world's leader in personal communications.

Novation

(800) 423-5419
In California:
(213) 996-5060
Circle 318 on inquiry card.

18664 Oxnard Street, Tarzana, CA 91356

www.americanradiohistory.com

Listing 2 continued:

```
003F  213400              LXI       H,SM2
0042  CD4600              CALL      PRINT
0045  C9                  RET       ; WAS 'JMP  PUSH' IN ORIG LIST
0046                ;
0046                PRINT
0046  0E0A                MVI       C,0AH
MAKRO ASSEMBLER AMA.2
0048                PNT
0048  46                  MOV       B,M
0049  23                  INX       H
004A  CD0D20              CALL      OUTP
004D  B9                  CMP       C
004E  C24800              JNZ       PNT
0051  C9                  RET
0052                ;
0052                DVCK      ENTRY
0052  215E00              LXI       H,DM1
0055  CD4600              CALL      PRINT
0058  210000              LXI       H,0
005B  54                  MOV       D,H
005C  5D                  MOV       E,L
005D  C9                  RET
005E  20444956    DM1       DB        ' DIVIDE CHECK',0DH,0AH
      49444520
      43484543
      4B0D0A
006D                DIV16     ENTRY
006D  78                  MOV       A,B
006E  B1                  ORA       C
006F  CA5200              JZ        DVCK
0072  AF                  XRA       A
0073  80                  ADD       B
0074  F5                  PUSH      PSW
0075  F43500              CP        NEGB
0078  AF                  XRA       A
0079  84                  ADD       H
007A  F5                  PUSH      PSW
007B  FC2800              CM        NEGH
007E  EB                  XCHG
007F  210000              LXI       H,0
0082  3E10                MVI       A,10H
0084  29          D2      DAD       H
0085  EB                  XCHG
0086  29                  DAD       H
0087  EB                  XCHG
0088  D28C00              JNC       D3
008B  23                  INX       H
008C  E5          D3      PUSH      H
008D  09                  DAD       B
008E  D29300              JNC       D4
0091  1C                  INR       E
0092  33                  INX       SP
0093  33                  INX       SP
0094  3D                  DCR       A
0095  C28400              JNZ       D2
0098  C3A000              JMP       D4A
009B  E1          D4      POP       H
009C  3D                  DCR       A
009D  C28400              JNZ       D2
00A0  E3          D4A     XCHG
00A1  C1                  POP       B
```

Listing 2 continued on page 470

www.americanradiohistory.com

In Less Than 3 Minutes

Your IBM Model 50, 60, 65, 75, or 85
Electronic Typewriter
can be an RS232C PRINTER or TERMINAL

CALIFORNIA MICRO COMPUTER Models 5060 and 5061 can be installed easily and require NO modifications to the typewriter.

For additional information contact:

CALIFORNIA MICRO COMPUTER
9323 Warbler Ave., Fountain Valley, CA.
92708 (714) 847-4141

MICROSTAT® - Release 3.0

MICROSTAT® + baZic® = PERFORMANCE

The best just got better! MICROSTAT has been the leader in the statistics field for microcomputers since 1979, and the new release 3.0 outperforms and is noticeably faster than previous versions. Just a few of the features include:

GREATER ACCURACY
BCD with up to 14 digit precision;

PROGRAM ENHANCEMENTS
Missing data capabilities and many more;

FASTER EXECUTION
Calculation time greatly reduced;

DYNAMIC FILE ALLOCATION
Data can be inserted, added, or deleted;

SPECIAL PRICE:
For a limited time get MICROSTAT plus baZic complete with program disk and documentation for each for $395.00, save $50.00!

The MICROSTAT - baZic version requires: a Z80 CPU, CP/M™ and 48K of memory. Available formats: 8" SD disk or 5¼" North Star only. Check with your dealer for other formats. Also available for: Microsoft's Basic-80™, North Star DOS and IBM. For more information, call or write:

ECOSOFT INC.
P.O. Box 68602
Indianapolis, IN 46268-0602
(317) 255-6476

MICROSTAT is a registered trademark of ECOSOFT, INC.
baZic is a registered trademark of MICROMIKES, INC.
CP/M is a registered trademark of DIGITAL RESEARCH
Basic-80 is a registered trademark of MICROSOFT

BYTE Books Carry Waite

A New Primer Series

Computer Animation Primer
by Mitchell Waite and David Fox

JUST PUBLISHED!

Illustrated in full color; this lively guide to the exciting world of computer-animated graphics is virtually "2-books-in-1." The first part covers the theory and products of high-resolution computer graphics, from frame buffer technology to shading algorithms; the second part shows you *how* to unlock the power of the Atari computer for true color animation. Features include program listings in Atari BASIC and 6502 Assembly Language, a source catalog of hardware and software for both Apple and Atari computers, and examples of today's best animation efforts.

Apple Backpack
by Scot Kamins and Mitchell Waite

Concrete methods for developing "user-friendly" software are at your fingertips in this useful course in humanized programming. Written in readable and often witty style, and with complete details on everything from screen formatting to writing clear documentation.

8086/8088 16-bit Microprocessor Primer
by Christopher L. Morgan and Mitchell Waite

You don't have to be a hardware engineer to follow the author's clear; crisp descriptions of the vastly more powerful new Intel 8086/8088 16-bit microprocessors. Covers design, capabilities, potential, currently available software, and new products based on the 8088, with emphasis on the IBM Personal Computer.

Word Processing Primer
by Mitchell Waite and Julie Arca

Focusing primarily on inexpensive microcomputer-based text-editing products, this book gives you a thorough rundown on a powerful new way to electronically generate, correct, and manage all kinds of typewritten documents. Coverage includes controlling copy appearance, and selecting equipment and programs.

At your bookseller or computer store. Or mail coupon for 15 days' FREE examination!

Byte/McGraw-Hill
P.O. Box 400
Hightstown, N.J. 08520

Please send me the book(s) checked for 15 days on approval. At the end of that time I will pay for the book(s) I keep, plus local tax, postage, and handling, and return any unwanted book(s) postpaid.

021742-4 ☐ **Computer Animation Primer** $18.95
033356-4 ☐ **Apple Backpack** $14.95
043109-4 ☐ **8086/8088** $16.95
067761-1 ☐ **Word Processing Primer** $14.95

Name_____

Address/Apt._____

City/State/Zip_____

23-D175-2144-3

Circle 163 on inquiry card.

www.americanradiohistory.com

Listing 2 continued:

```
00A2  F1                        POP         PSW
00A3  A8                        XRA         B
00A4  FC2800                    CM          NEGH
00A7  7A                        MOV         A,D
00A8  B3                        ORA         E
00A9  C8                        RZ
MAKRO ASSEMBLER AMA.2
00AA  AF                        XRA         A
00AB  80                        ADD         B
00AC  F0                        RP
00AD  AF                        XRA         A
00AE  93                        SUB         E
00AF  5F                        MOV         E,A
00B0  9A                        SBB         D
00B1  93                        SUB         E
00B2  57                        MOV         D,A
00B3  C9                        RET
200D                OUTP        EQU         200DH
00B4  204F564552    SM2         DB          ' OVERFLOW',13,10
      5246C04F
      570D0A

00BF
MAKRO ASSEMBLER AMA.2
0000  ERRORS
SYMBOL TABLE
D2          0084 01   D3          008C 01   D4          009B 01   D4A         00A0 01
DIV16       006D 01   DM1         005E 01   DSPASC      0000 01   DVCK        0052 01
NEGB        003E 01   NEGH        0028 01   OUTP        200D 00   OVFL        003F 01
PNT         004B 01   PRINT       0046 01   SM2         00B4 01   WR          001F 01
Y3          000F 01
```

Listing 3: *Hexadecimal dump of the trace routine as it would appear after being link-loaded to memory location 1000.*

```
+>DH 1000-111D
1000  21 64 29 3E  C3 77 23 11   1E 10 73 23  72 C9 11 64
1010  29 21 1A 10  01 04 00 ED   B0 C9 DB 03  E6 02 2A C4
1020  59 2B 7E FE  5C 28 1E 32   58 10 2B 7E  32 57 10 21
1030  59 10 0E 07  CD 4C 10 2A   57 10 CD 5F  10 21 59 10
1040  0E 03 CD 4C  10 DB 03 E6   02 F2 68 29  46 AF CD 0D
1050  20 0D 41 23  10 F6 C9 00   00 0D 0A 20  41 54 20 AF
1060  3D F5 A4 F2  6E 10 06 2D   CD 0D 20 CD  87 10 01 0A
1070  0C CD CC 10  3E 30 83 F5   7C B5 C2 6E  10 F1 47 CD
1080  0D 20 F1 F2  7E 10 C9 AF   95 6F 9C 95  67 D6 80 B5
1090  C0 C3 9E 10  AF 91 4F 98   91 47 D6 80  B1 C0 21 13
10A0  11 CD A5 10  C9 0E 0A 46   23 CD 0D 20  B9 C2 A7 10
10B0  C9 21 BD 10  CD A5 10 21   00 00 54 5D  C9 20 44 49
10C0  56 49 44 45  20 43 48 45   43 4B 0D 0A  78 B1 CA B1
10D0  10 AF 80 F5  F4 94 10 AF   84 F5 FC 87  10 EB 21 00
10E0  00 3E 10 29  EB 29 EB D2   EB 10 23 E5  09 D2 FA 10
10F0  1C 33 33 3D  C2 E3 10 C3   FF 10 E1 3D  C2 E3 10 EB
1100  C1 F1 A8 FC  87 10 7A B3   C8 AF 80 F0  AF 93 5F 9A
1110  93 57 C9 20  4F 56 45 52   46 4C 4F 57  0D 0A
```

Listing 4 is on page 472

www.americanradiohistory.com

Circle 64 on inquiry card.

The Byte Shop® Franchise Opportunity.

Computer retailing has survived the economic hard times like no other industry: with phenomenal growth and profit.



Computer Retailing: The growth industry of the 1980s.

Just wait until the economy gets *hot!*

That's why this is a good time to consider the Byte Shop® opportunity.

If you are motivated to make a commitment to success in the computer retailing industry, you owe it to yourself to evaluate the Byte Shop® Franchise prospectus. Cash required: $60,000. Franchise fee only $10,000.

Just call or write.
21130 Cabot Boulevard
Hayward, CA 94545
415/783/8272

ByteShop®
the affordable computer store.

Name_____

Company_____

Address_____

City/State/Zip_____

Phone_____

Byte Shop is a registered trademark of Byte Industries.

Circle 474 on inquiry card.

The HIGH-IQ Serial Interface

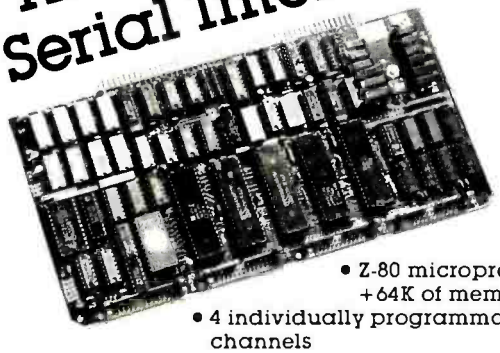

- Z-80 microprocessor +64K of memory
- 4 individually programmable channels

Smart enough to:

- print text and transmit and receive data **without** tying up your computer
- link up to 4 terminals to your computer and significantly cut delay time for multiple users

The Archives Intelligent Serial Interface Board from the makers of the dependable Archives Business Computer/Word Processor. For complete details and our technical bulletin write or call:

archives incorporated
404 West 35th Street • Davenport, IA 52806
Telephone (319) 386-7401

RACET COMPUTES LTD. Integrity in Software
1330 N. Glassell, Suite M, Orange, CA 92667 (714) 997-4950

RACET COMPUTES LTD. Integrity in Software
1330 N. Glassell, Suite M, Orange, CA 92667 (714) 997-4950

HARD DISK SUPPORT RACET COMPUTES = HARD DISK SUPPORT RACET COMPUTES = HARD DISK SUPPORT RACET COMPUTES = HARD DISK SUPPORT RACET COMPUTES = HARD DISK SUPPORT

FIELD PROVEN HARD DRIVES

5 to 240 MEGABYTES ON LINE for the TRS-80* Mod II/XVI
Winchester and Cartridge Disk Drives available for immediate delivery!!

5 MEGABYTE FOR Mod I, II, and III
CALL FOR PRICING

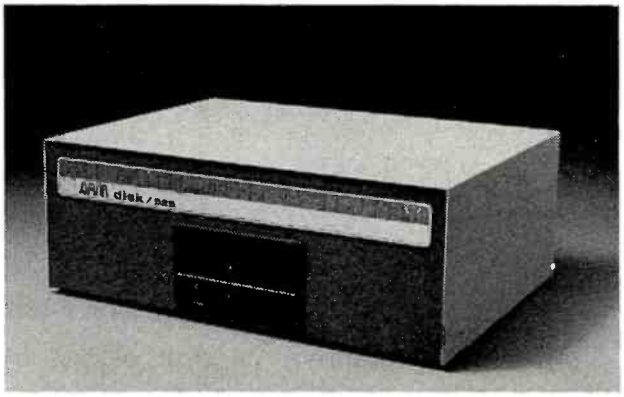

14+ Megabyte (formatted) ARM Winchester Disk Drive CALL for Pricing
Includes ECC error detection and correction. FAST. Service Contract Available ($30/month/drive). Multiplexor available. SHARE hard drive between four Model II's!!

20 Megabyte CII Honeywell Bull Cartridge Drive $7995
10 Megabytes fixed, 10 removable for the professional installation requiring Removable Media for BACKUP. 60 and 120 Megabyte add-on drives available. Up to 240 MEGABYTES!! Four port multiplexor available to SHARE hard drives.

HARD/SOFT DISKS SYSTEM (HSDS) SOFTWARE

Radio Shack 2.0 Compatible Operating System for Hard Drive Operation. Run your 2.0 software on hard drives without conversion (except drive designation). Compatible with most machine language programs that use the standard calling sequence. Supports ARM, Cameo, Cynthia Bull, Corvus, Data Peripherals, QCS, Radio Shack, and certain other hard drives.

Access **BOTH** your floppy disk drives and hard drive files **INTERCHANGEABLY!!** Complete utilities include HZAP (Hard Disk SUPERZAP), Directory Catalog System, Parameterized FORMAT, HPURGE (Bulk Copy/Purge Utility) and others.

The Hard/Soft Disk System (HSDS) Software has almost two years **FIELD** experience. Version 5.0 adds several enhancements including maintenance of system files on the hard drive, files as large as the disk, the ability to segment the disk as logical drives, and definable directory size. Floppy backup (close to a Megabyte per minute) is provided for Winchester drives.

HSDS for Radio Shack $500
HSDS for Other Drives $400

RACET COMPUTES LTD.
Integrity in Software

1330 N. Glassell, Suite M, Orange, CA 92667 (714) 997-4950

CALL FOR COMPETITIVE PRICING ON HARD DRIVE SUBSYSTEMS — BUY WHERE YOU CAN GET SOFTWARE SUPPORT!! DEALER AND SYSTEM HOUSES — WE HAVE DEALER PRICING!!

CIRCLE READER RESPONSE FOR FREE TRS AND NEC CATALOG.

*TRS-80 is a trademark of tandy corporation

Circle 372 on inquiry card.

www.americanradiohistory.com

The Mega Super Computer

Free Computer with a Purchase of a RAM Disk

★ Z80B Running at 5mhz, ★ Versatile CPM, ★ Math chip 9511 or 9512 AMD, ★ 48 Plus Ports on Mega Expander BUS, ★ CTC, DMA, ★ 2 Parallel Ports—with hand shaking, ★ Serial Ports—with or without hand shaking runs 150 to 19K2 Baud. Runs most terminals, printers, and modems.

★ NOW! CPM 3.0.
★ Hard Disk interface hooks directly to Priam Drives.
★ Floppy Disk Controller—Handles Single Density IBM compatible disks and Dual Density 1 or 2 sided supports 8" or 5¼" in various combinations—3 Drives equal over 4 Mega Bytes of Storage. WD2797
★ 512K Bytes of 64K D.rams with parity configurable as a HIGH SPEED ELECTRONIC DISK or 8 banks of 64K for multi-user or countless other applications.
★ All this on a state-of-the-art 4 layer card—with accurate documentation—10" x 15".
★ Prices: Bare Board with Documentation $499
64K Base System A & T $895
512K Base System A & T $1595
CPM 2.2 System A & T $125
512K Base Kit $1299
64K Base Kit $699
MPM $325

MEGA CO.
2318 S. Park Street, Madison, WI 53713 (608)255-7400

Circle 263 on inquiry card.

DAISY WHEEL PRINTERS
SMITH-CORONA TP-1
$529

- BROTHER HR-15(2 colors) ..... $AVE
- BROTHER HR-1(16k) $749
- DAISY WRITER 2000(48k) $999
- C-ITOH F-10(40 cps) $1295
- COMMODORE 64 Computer ... $AVE
- OSBORNE Computer $1595
- SANYO MBC-1000(incl sftwre) $1595
- KAY-PRO II ..... $CALL
- ZORBA ..... $AVE
- Wordstar/Spellstar/Mailmerge .. $349
- Franklin-Ace $899

MICRO MART
5375 Kearny Villa Rd #115, San Diego CA 92123
(619) 268-0169

Circle 277 on inquiry card.

EPSON
NEW REPLACEMENT
RIBBON CARTRIDGES
MX 70-80 $ 4.75 ea.
MX 100 10.75 ea.
Please add $.75 ea. handling/shipping.

LABELS
$12.00/5000
STOCK #10350—1-15/16"x3½"x1 wide.
White—pressure sensitive—pin feed—
4¼" carrier, packed 5000 per box.
Add $2.50 per box handling/shipping.

TERMS: Visa & M.C. (add 4%), check or money order. C.O.D.'s. add $2.00, min. order $12.00. CA residents add 6% Sales Tax.

S&W COMPUTER SUPPLY CO.
25422 TRABUCO RD. SUITE #200
EL TORO, CA. 92630 • (714) 768-0370

Circle 381 on inquiry card.

Listing 4: *Simple BASIC program and the results of running the trace routine. As each line of program code is interpreted, the trace routine displays the current line number.*

```
100 REM SAMPLE PROGRAM TO ILLUSTRATE TRACE USAGE
110 FOR I=1 TO 3
120 X=RND(-1)
130 Y=CALL(4096) \ REM TURN ON TRACE
140 IF X>.5 THEN 150 ELSE 160
150 S1=S1+1 \ GOTO 170
160 S2=S2+1
170 Y=CALL(4110) \ REM TURN OFF TRACE
180 NEXT I
190 PRINT S1,S2
READY

RUN

 AT   140

 AT   160

 AT   170

 AT   140

 AT   150

 AT   170

 AT   140

 AT   160

 AT   170

 1  2
READY
```

www.americanradiohistory.com

Circle 444 on Inquiry card.

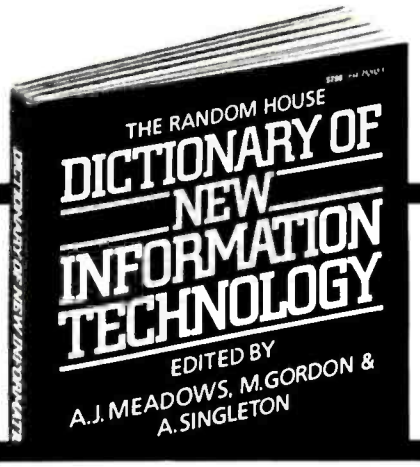

A VINTAGE PAPERBACK

The first comprehensive encyclopedia covering *all* aspects of the new electronic technologies now radically changing communications, education, and business practices throughout the world, THE RANDOM HOUSE DICTIONARY OF NEW INFORMATION TECHNOLOGY offers a wealth of explanations of crucial terms, concepts, methods, and media. Illustrated.

$7.95, now at your bookstore

VINTAGE BOOKS
A division of Random House

Circle 21 on Inquiry card.

NEW THIS MONTH!!

EPSON
FX SERIES PRINTERS
FX-80 F/T
$645
Now In Stock!!

MODEL 12
80K RAM, 2 Drive
$3599
RADIO SHACK
12 Meg. HARD DISK
$3199

IBM P.C.
64K RAM
2 320K Drives
AMDEK 300, DOS 1.1
MONOCHROME ADAPTER
$3249.95



New Low Prices!
MODEL III
TRS-80
48K 799
48K. 2 Dr. 1499

COMPUTERS
IBM P.C. $4399.95
320K RAM Memory, two 320K Disk Drives DOS 1.1, Color Graphics Card Hi-Res. B/W Green Screen Monitor, Parallel Card, RS-232 Serial Card, Clock Calendar, Wordstar & Visicalc
IBM P.C. $2699.95
64K Ram Memory, two 320K Disk Drives and Drive Controller
PRINTERS
Epson
MX-80 ..... $419
MX-80F/T $499
MX-100 ..... $645
Okidata
ML 80 ..... $350
ML 82A $425
ML 83A $699
ML 84 ..... $1049
STAR MICRONICS
Gemini 10 ..... $389
Gemini 15 ..... $499
Smith-Corona T.P.I $599
Serial or Parallel

DISK DRIVES
TEAC - Complete with Power Supply & Cabinet
40 Track Single Side $229
40 Track Dual Side $340
80 Track Single Side $340
80 Track Dual Side $399

TANDON - Complete with Power Supply & Cabinet
40 Track Single Side $239
40 Track Dual Side $319
80 Track Single Side $319
80 Track Dual Side $369
TEAC - Bare
40 Track Single Side $189
40 Track Dual Side $289
80 Track Single Side $289
80 Track Dual Side $349
TANDON - Bare
40 Track Single Side $199
40 Track Dual Side $269
80 Track Single Side $269
80 Track Dual Side $319

THESE ARE OUR CASH DISCOUNTED PRICES. C.O.D. AND CHARGE ORDERS ARE 3% HIGHER. ALL COMPUTERS ARE SHIPPED FREIGHT COLLECT. PRICES, SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE. IBM & IBM PERSONAL COMPUTERS ARE TRADEMARKS OF INTERNATIONAL BUSINESS MACHINES, INC. TRS-80 AND RADIO SHACK ARE TRADEMARKS OF TANDY CORPORATION.

AMERICAN
118 SO. MILL ST
PRYOR, OK 74361
918/825-4844
SMALL BUSINESS COMPUTERS

BYTE back issues for sale

	1976	1977	1978	1979	1980	1981	1982	1983
Jan.		$2.00		$2.75	$3.25	$3.25		$3.70
Feb.			$2.75	$2.75	$3.25	$3.25	$3.70	$3.70
March			$2.75	$2.75	$3.25	$3.25	$3.70	$3.70
April			$2.75	$2.75	$3.25	$3.25	$3.70	
May		$2.00	$2.75	$2.75	$3.25	$3.25	$3.70	
June		$2.00	$2.75	$2.75	$3.25	$3.25	$3.70	

	1976	1977	1978	1979	1980	1981	1982	1983
July	$2.00	$2.00	$2.75	$2.75	$3.25	$3.25	$3.70	
Aug.	$2.00	$2.00	$2.75	$2.75	$3.25	$3.25	$3.70	
Sept.		$2.75	$2.75	$2.75	$3.25	$3.25	$3.70	
Oct.			$2.75	$2.75	$3.25	$3.25		
Nov.	$2.00	$2.75		$3.25	$3.25	$3.25	$3.70	
Dec.	$2.00	$2.75	$2.75	$3.25	$3.25	$3.25	$3.70	

Circle and send requests with payment to:
BYTE Back Issues
P.O. Box 328
Hancock, NH 03449

Please allow 4 weeks for domestic delivery and 8 weeks for foreign delivery.

name _____
address _____
city _____
state _____ zip _____

The above prices include postage in the US. Please add $.50 per copy for Canada and Mexico; and $2.00 per copy to foreign countries.

☐ Check enclosed

Payments from foreign countries must be made in US funds payable at a US bank.

☐ VISA ☐ Master Card
Card # _____ Exp. _____

Signature _____

www.americanradiohistory.com

Event Queue

March 1983

March

Continuing Engineering Education Courses, George Washington University, Washington, DC. Among the courses being offered are "Managing Data Processing Systems in Multiproject Environments" and "Design of Digital Control Systems." Fees range from $685 to $855. Further details are available from Douglas Green, Continuing Engineering Education, George Washington University, Washington, DC 20052, (800) 424-9773; in the District of Columbia, (202) 676-8515.

March

Courses for Developers and Users of Computer Systems, various sites throughout the U.S. Among the courses being offered by the AMA (American Management Associations) are "Fundamentals of Data Processing for the Non-data Processing Executive," "Fundamentals of Data Processing for Administrative Assistants and Office Support Staff," and "Database Concepts and Design." For complete registration and course information, contact the AMA, 135 West 50th St., New York, NY 10020, (212) 586-8100.

March-May

Courses in C Language and Unix, various sites throughout the U.S. Three 5-day courses are offered by Plum Hall Inc. The "C Programming Workshop," a hands-on course, covers all aspects of the C language for individuals able to program in another language. The "Advanced C Topics Seminar" covers efficiency, portability, readability, debugging, packaging, and interfacing. An introductory course, the "Unix Workshop" focuses on software development. Each course fee is $1000. For details, contact Joan Hall, Plum Hall Inc., 1 Spruce Ave., Cardiff, NJ 08232, (609) 927-3770.

March-June

Computer Showcase Expos, various sites throughout the U.S. This popular show will be held in more than 10 cities between March and June. For a schedule, contact The Interface Group, 160 Speen St., POB 927, Framingham, MA 01701, (800) 225-4620; in Massachusetts, (617) 879-4502.

March-June

Data Processing Courses, the Hartford Graduate Center, Hartford, CT. Among the courses offered are "ANS COBOL Programming Workshop 1" and "CICS/VS Command Level Coding Workshop." Hartford Graduate Center data-processing courses are available for on-site presentation. For more information, contact Don Florek, Hartford Graduate Center, 275 Windsor St., Hartford, CT 06120, (203) 549-3600, ext. 252, 253, or 254.

March-June

Intel Microcomputer Workshops, various sites throughout the U.S. Contact Intel Corp., Mail Stop SV3-1, 3065 Bowers Ave., Santa Clara, CA 95051.

March-June

Intensive Seminars of Interest to Data Processing Professionals, Boston metropolitan area. Among the two- to five-day seminars offered are "Project Management" and "Data Communications." Registration fees range from $495 to $975. For a seminar bulletin, contact Ms. Ginny Bazarian, Office of Continuing Education, Higgins House, Worcester Polytechnic Institute, Worcester, MA 01609, (617) 793-5517.

March-June

Seminars in Simulation, Management, Statistics, and Computer Science, various sites throughout the U.S. "Simulation Modeling for Decision Making," "Database Design," and "Satellite Communications Technology" are some of the topics to be presented. For details, contact the Institute for Professional Education, POB 756, Arlington, VA 22216, (703) 527-8700.

March-July

Courses from Integrated Computer Systems, various sites throughout the U.S. Course titles include "Computer-Aided Design and Manufacturing," "Computer Graphics," "Hands-On Pascal Workshop," "Defining Software Requirements, Specifications, and Tests," and "Computerized Robots." Fees range from $695 to $845. For information, contact Ruth Dordick, Integrated Computer Systems, 3304 Pico Blvd., POB 5339, Santa Monica, CA 90405, or call (213) 450-2060.

March-July

Technical Courses from Zilog, Campbell, CA. A wide variety of such courses as the "Z8000 Processor Family" and "C Programming" are offered. Fees range from $175 to $875. For a complete schedule, contact Zilog Inc., Training and Education Department, 1315 Dell Ave., Campbell, CA 95008, (408) 370-8092.

March 11-17

The Twenty-fourth Annual Management Conference of the Electronic Representatives Association, Cancun, Mexico. Educational programs, special meetings, round-table discussions, and workshops will highlight this annual event. Contact the Electronic Representatives Association, 20 East Huron St., Chicago, IL 60611, (312) 649-1333.

March 14-15

The Seventh Annual Conference of the Michigan Association for Computer Users in Learning—MACUL '83, Hyatt Regency, Dearborn, MI. Sessions and speakers will highlight this conference. For more information, contact Betty VandenBosch Shaw, Coordinator of Mathematics, Flint Community Schools, 923 East Kearsley, Flint, MI 48502, (313) 762-1007.

March 14-17

The Seventh Annual Federal Office Systems Expo—FOSE '83, Washington Convention Center, Washington, DC. Sixty high-level sessions will cover the development of integrated office systems in both government and industry. More than 200 companies will display the latest in office systems technology. For more information, contact Mary Beth Gouled, National Trade Productions Inc., 9418 Annapolis Rd., Lanham, MD 20706, (800) 638-8510; in Maryland, (301) 459-8383.

March 14-18

Computer Graphics Applications for Management and Productivity—CAMP '83, International Congress Center, Berlin, West Germany. This conference features tutorials, technical papers, and exhibits that reflect the practical applications and state of the art of computers and computer-graphics technology. Topics on the agenda include computer-aided design and manufacturing, sales-support graphics, and improving the use of engineering data. A hardware and software exhibition will be held. Full particulars are available from the World Computer Graphics Association, Suite 250, 2033 M St. NW, Washington, DC 20036, (202) 775-9556.

www.americanradiohistory.com

Circle 51 on Inquiry card.

PC-1 Powerline Controller

Puts Bidirectional A.C. carrier communications in your APPLE II

- Operates up to 256 Leviton/BSR remote control devices
- Receives input communications from Leviton/BSR transmitters
- On board real time clock
- Worldwide compatibility (50/60 Hz)
- Easy installation and operation

PC-1 is available for $285.00
Dealer inquiries invited.

BCS

BI-COMM SYSTEMS
10 Yorkton Industrial Court, Saint Paul, MN 55117 (612) 481-0775

Circle 244 on inquiry card.

Star Micronics Gemini 10 9x9 matrix Hi Res. graphic, 100CPS, friction/tractor feed, parallel . . $389
Gemini 15 15" carriage. . . $495
Epson MX80 F/T III . . . . . Call
Epson MX100 F/T III . . . . . Call
C. Itoh ProWriter 8510AP, 120 CPS, Graphics, Parallel $459
Okidata ML80P, 80 CPS . . . $339
Okidata ML82A, 120 CPS . . $399
Okidata 84, 200 CPS, 132 col. $999
Okidata 84S 200 CPS, Serial. $1099
NEC 8023A, 100 CPS, Tractor/friction fee, Graphics, parallel . . $459

C. ITOH F-10 PRINTER
40 CPS daisywheel printer. Parallel. Limited time offer . . . $ Call
COMREX CR-1-C Dalsywheel, 17 CPS, Parallel $769.00

BROTHER PRINTER HR-1
Letter quality daisywheel printer, 15 CPS, friction feed, Parallel interface. Super value $759.00

NEC SPINWRITER 3550
NEC's new letter-quality printer especially designed for the IBM PC. 203 columns, auto proportional space, justification, bi-directional, 350 words per min. Serial . $1,995



MONITOR SALE
Dynax GM-120, 12" green, 600 dot 20 MHz. $269 $129
Dynax AM-121, 12" Amber, 600 dot, 20 MHz $250 $149
Taxan KG-12N, 12" green 800 dot, ... $199 $145
Taxan KA12N, 12" amber, 800 dot $295 $159
NEC JC1203 RGB Color, 690 dots hi res, 16 colors . . . $895 $749
Cable—NEC to IBM $19
Princeton HX-12, 12" RGB Color, 690 dot hi res. 16 color. Has identical IBM cabinet $795 $599
Taxan RGBvison I, 380 dot . $365
Taxan RGBvision II, 510 dot $549
Taxan RGBvision III, 630 dot. $640
Cable—Taxan to IBM or Apple . $19

AST MEMORY CARDS
ComboPlus, MegaPlus and I/O Plus cards for IBM PC. Call for best price

5¼ TANDON DRIVES
The newest. IBM PC compatible. Installation instruction included.
TM100-1A, SSDD 160K . . . $175
TM100-2A, DSDD 320K. . . $259

IBM Personal Computers
A. 64K system unit & keyboard, two 160K drives & controller. $2,355
B. 64K system unit & keyboard, two 160K drives & controller, color/graphic card. $2,620
C. 64K system unit & keyboard, two 160K drives & controller, IBM monochrome display & display/printer adapter. $2,995
If you want 320K drives for the above systems . . . . . add $230

SOFTWARE FOR IBM PC

VisiCalc	~~$250~~ $179
Desktop Plan	~~$300~~ $229
VisiOex.	~~$250~~ $189
VisiFile.	~~$300~~ $235
VisiSchedule.	~~$300~~ $229
VisiTrend/Plot.	~~$300~~ $229
Multi Plan (64K)	~~$250~~ $230
DOS 1.1	$40
Basic Compiler	~~$300~~ $275
Cobol Compiler	~~$700~~ $650
Fortran Compiler DOS	~~$350~~ $320
Macro Assembler DOS	~~$100~~ $90
Pascal Compiler	~~$300~~ $275
Async Communication 2.0	$60
Dow Jones Reporter	~~$100~~ $95
Peachtree Acct. Payable	~~$595~~ $555
Peachtree Acct. Receivable	$555
Peachtree Gen. Ledger	~~$595~~ $555
Peachtree Inventory	~~$595~~ $555
Peach Pak 40 (GL, AP, AR)	$395
BPI Account Receivable	~~$425~~ $395
BPI General Ledger	~~$425~~ $395
BPI Inventory Control	~~$425~~ $395
BPI Job Cost.	~~$550~~ $495
BPI Payroll.	~~$425~~ $395

To order, please send money order or cashier's check. Personal or company checks require 2-3 weeks to clear. Prices reflect 3% cash discount. Visa/Mastercard accepted. Shipping, insurance & handling charges: 3% of total order value by UPS Surface, 5% by UPS Air or Parcel Post. California residents add sales tax. COD's requires 20% deposits. Prices & availability subject to change without notice. Send for Monthly Specials and Catalog.

MasterCard VISA

EASTERN ENTERPRISES, INC.
2937 S. VAIL AVE., LOS ANGELES, CALIF. 90040
TOLL-FREE Order Desk (800)392-7081 Calif., Alaska, Hawaii (213)725-3080 TELEX 664477

12" B&W MONITOR



Contrast
Power/Bright
V-Hold
H-Hold

VIDEO 100 by *AMDEK*
FULL FACTORY WARRANTY **$79.95**

for **APPLE**
16K RAM CARD
Language Transparent
COEX FACTORY WARRANTY **$69.95**

5¼"Floppy
DISKETTES
All Certified–100% Guaranteed
BOX of 100 . . . **$149.00**
Above with Hub Rings **$169.00**

FLOPPY DISK DRIVE
From *Fourth Dimension Systems* with
- Track Zero Micro Switch
- DOS 3.2.1 & DOS 3.3
- CP/M and PASCAL

DESIGNED FOR YOUR APPLE™ $287.95
Controller Card for above $99.00

COEX 80-FT DOT MATRIX PRINTER



- Interface with Apple,™ Centronics RS-232, IEEE-488
- 9x7 Dot Matrix, 80 CPS, Bi-Directional Printing
- 2K Buffered Memory
- 80, 96, 132 Columns, Graphics and Block Printing
- Selectable Char Pitch, Line Spacing and Feed

COEX Interface Card to APPLE **$49.95**
$299.95

VISION-80© $249.00
80x24 Video Display Card
Vista Computer Company's new Vision-80 board is a sophisticated yet easy to use video display card for the Apple™ computer.

PARALLEL INTERFACE
EPSON TO APPLE
New From COEX **$49.95** CABLE INCLUDED

PROTOTYPING CARDS
for APPLE. . . . **$19.95**
for I.B.M. **$49.95**

EXTENDER CARDS
for APPLE. . . **$16.95**
for I.B.M. . . . **$19.95**

"Have You Kissed Your Computer Lately"

Components Express, Inc.



VISA 1380 E. Edinger • Santa Ana, Calif. 92705 • 714/558-3972 master charge
Terms of Sale: Cash, Checks, Credit Cards, M.O., C.O.D. Calif. residents add 6% sales tax.

Circle 88 on inquiry card.

www.americanradiohistory.com

And then there were none.

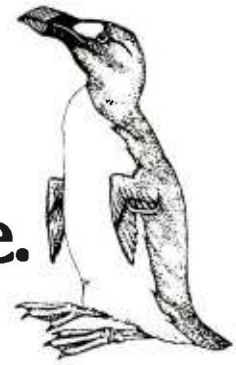

The list of already extinct animals grows . . . the great auk, the Texas gray wolf, the Badlands bighorn, the sea mink, the passenger pigeon . . .

What happens if civilization continues to slowly choke out wildlife species by species?

Man cannot live on a planet unfit for animals.

Join an organization that's doing something about preserving our endangered species. Get involved. Write the National Wildlife Federation, Department 105, 1412 16th Street, NW. Washington, DC 20036.

It's not too late.

PUT PRICES IN CHECK

ZIP PACK RELOAD RIBBONS
FOR
NEC 8023A
APPLE PRINTERS
C. ITOH PROWRITER
$7.99 EA. $89.99 DOZ.

CARTRIDGE RIBBONS FOR EPSON
MX-80 $7.99
MX-100 $12.95
$89.99 DOZ.
$139.86 DOZ.

MEMOREX DISKETTES
5¼ SINGLE SIDE - DUAL DENSITY
$24.99
10 PACK

LABEL SPECIAL
$2.99/K
(5K/MIN.)
1 ACROSS 3"x15/16 CONTINUOUS LABELS

COMPLETE LINE OF OTHER RIBBONS AVAILABLE. PLEASE CALL
ALL ABOVE PRICES INCLUDE SHIPPING

Check-Mate

51 DIAUTO DR. P.O. BOX 103
RANDOLPH, MA 02368
TOLL FREE 800-343-7706 IN MASS 617-963-7694
WE ACCEPT MASTER CARD & VISA
MASS. RESIDENTS ADD 5% SALES TAX
PHONES OPEN 9AM-7PM EASTERN TIME

Event Queue

March 15-16

Selecting a Microcomputer for Scientific and Engineering Applications, Colorado School of Mines, Golden, CO. This short course reviews hardware and software technology for potential buyers of microcomputers in relation to specific scientific and engineering applications. The fee is $195. Contact the Space Office, Colorado School of Mines, Golden, CO 80401, (303) 273-3321.

March 16-17

Business-Expo, Albert Thomas Convention and Exhibit Center, Houston, TX. This show features everything from computers, copiers, and telephone equipment to interior decorating, office design, and financial consulting. More than 20 seminars on business technologies will be offered. Complete details are available from Business-Expo, 702 East Northland Towers, 15565 Northland Dr., Southfield, MI 48075, (313) 569-8280.

March 17-19

The New Jersey Business Computer Show, Holiday Inn (North), Exit 14, New Jersey Turnpike. This "strictly business" show will feature small business systems, word processors, software, and accessories. For further information, contact the Kengore Corp., POB 13, Franklin Park, NJ 08823, (201) 297-2526.

March 17-19

The Third Annual Microcomputers in Education Conference, Arizona State University, Tempe. The theme for this conference is "Forward to the 3 Cs: Communicating, Calculating, and Computing." Demonstrations, workshops, and presentations will emphasize the potential of computers to revolutionize the learning process. Topics to be explored include how computers are changing the nature of: content in subject areas, teaching, and what it means to be well educated. University credit will be available. Further information can be obtained from Marilyn Sue Ford, B-47 Payne Hall, College of Education, Arizona State University, Tempe, AZ 85287, (602) 965-7363.

March 18-20

The Eighth West Coast Computer Faire, Civic Auditorium and Brooks Hall, San Francisco, CA. Attendance this year is expected to reach 40,000. More than 600 exhibitors and a wide assortment of seminars make this one of the largest annual computer shows. For more information, contact The Computer Faire, 333 Swett Rd., Woodside, CA 94602, (415) 851-7075.

March 19

The Sixth Annual PACS Computer Games Festival, La Salle College Ballroom, 20th and Olney, Philadelphia, PA. This show is sponsored by the La Salle College Physics Department and PACS (Philadelphia Area Computer Society). The theme is "Computers in Daily Life." Contact Stephen A. Longo, Physics Department, La Salle College, Philadelphia, PA 19141, (215) 951-1255.

March 21-24

Interface '83, Miami Beach Convention Center, Miami, FL. This conference will cover all aspects of data communications and information processing in technology, management, policy, and strategy. It is cosponsored by McGraw-Hill's *Business Week* and *Data Communications* magazines. For further details, contact The Interface Group, 160 Speen St., POB 927, Framingham, MA 01701, (800) 225-4620; in Massachusetts, (617) 879-4502.

Circle 76 on inquiry card.

www.americanradiohistory.com

New, Unique Products
Alternate Energy, Telescopes, Optics, Weather, Magnets, Microscopes & More!

In One Giant FREE Catalog

Biggest Catalog! Finest Quality!
Since 1941, thousands of engineers, craftsmen & hobbyists nationwide have been coming directly to the Edmund Scientific Catalog for quality products. . .fully guaranteed!

FREE! Simply fill in below, mail today, and your Edmund Scientific Catalog will be on its way to you.

☐ **Send FREE Catalog**

Name _____

Address _____

City _____ **State** _____ **Zip** _____

Edmund Scientific
Dept. 8333 2115 Edscorp Bldg.
Barrington, N.J. 08007

No. 3484 ©1982 Edmund Scientific Co.

MuSYS gives S-100 the best in networks. . .

with TurboDOS*

With CP/M®* compatible TurboDOS and MuSYS network slave boards you can turn any Z80-based, S-100 system into a superior multi-processor, multi-user network.

TurboDOS is faster than CP/M® for system functions. TurboDOS supports larger files (134 MB) and disks (1048 MB) and, unlike CP/NET*, it's compatible with nearly all 2.2 applications software. Many features which are optional, extra cost or not available at all in CP/M® are standard with TurboDOS. Add a MuSYS NET/82* and you've got a complete, hardware isolated network slave including Z80A CPU, two serial ports and many other advanced features. For special applications an additional bank of 64K memory is available.

Expand your S-100 system economically with MuSYS now! Ask for all the facts on TurboDOS and our expanding line of network slave boards. (Generous quantity/dealer discounts available.)

*TurboDOS is a trademark of Software 2000, Inc. CP/M and CP/NET are trademarks of Digital Research. Inc. NET/82 is a trademark of MuSYS Corp.

MuSYS CORP
Specialists in Multi-user Microsystems

1752 B Langley
Irvine, CA 92714
(714) 662-7387
TWX: 910-595-1967
CABLE: MUSYSIRIN

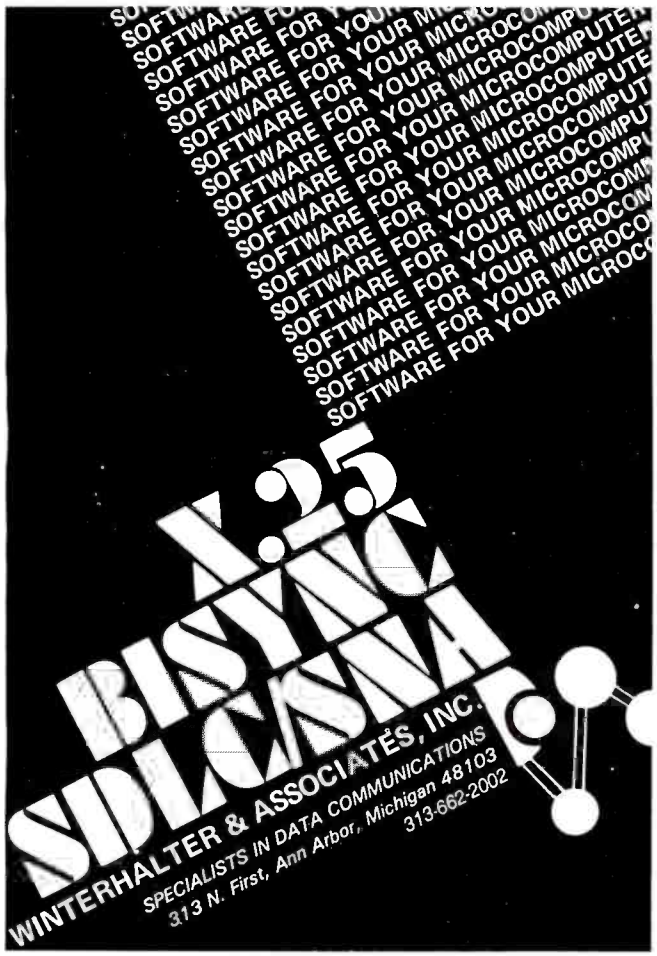

www.americanradiohistory.com

March 21-24

Personal Microcomputer Interfacing and Scientific Instrumentation Automation, Virginia Polytechnic Institute and State University, Blacksburg, VA. This is a hands-on workshop where the participant designs and tests concepts with the actual hardware. The fee is $595. For more information, contact Dr. Linda Leffel, C.E.C., Virginia Tech, Blacksburg, VA 24061, (703) 961-4848.

March 21-25

Auditing in the Contemporary Computer Environment, San Diego, CA. This course is designed for internal auditors and financial and data-processing professionals. It provides a comprehensive audit approach for computer-based systems, including how to evaluate controls and how to design a program of tests using questionnaires, checklists, software tools, and flow charts. For details, contact Marge Umlor, EDP Auditors Foundation, 373 South Schmale Rd., Carol Stream, IL 60187.

March 22-24

Cincinnati Business Show, Exhibition-Convention Center, Cincinnati, OH. A wide range of products and services will be displayed, including computers, satellite equipment, electronic mail systems, and telecommunications equipment. For more information, contact Ray G. Nemo, Cincinnati Business Show, 10608 Millington Court, Cincinnati, OH 45242, (513) 791-6300.

March 24-25

Computers in Construction, Orlando, FL. This seminar is designed to assist construction contractors and construction management firms in acquiring computer systems. The registration fee is $395. For further information, contact CIP Information Services Inc., 1105-F Spring St., Silver Spring, MD 20910, (301) 589-7933.

March 24-25

The Western Educational Computing Workshops, Hayward, CA. These workshops, sponsored by the California Educational Computing Consortium, provide demonstrations and hands-on experience with new computer applications, software, and hardware. Contact Jerry Rose, Computer Center, California State University, 25800 Hillary St., Hayward, CA 94542.

March 24-25

Workshop on Performance and Evaluation of Local Area Networks, Worcester, MA. This workshop will seek to increase interaction and communications between active researchers and systems developers on the performance and evaluation of local-area networks. Contact T. C. Ting, Computer Science Department, Worcester Polytechnic Institute, Worcester, MA 01609, (617) 793-5670.

March 25

Communication Aids and Computers: A Voice for the Non-Vocal, Stokes Auditorium, Children's Hospital, Philadelphia, PA. This conference will present recent advances in technology, methodology, and research as they relate to computers and speech technology. Sessions will include lectures, videotapes, and equipment demonstrations. The registration fee is $75. This conference is sponsored by the Children's Seashore House and the Division of Child Development and Rehabilitation of the Children's Hospital of Philadelphia. For further information, contact Joan Bruno, Chief Speech Pathologist, Children's Seashore House, 4100 Atlantic Ave., Atlantic City, NJ 08404, (609) 345-5191, ext. 205.

March 27

The 1983 Greater Baltimore Hamboree and Computerfest, Maryland State Fairgrounds Exhibition Complex, Timonium. Personal computers, business systems, software, and a flea market highlight this electronics show. Guest speakers will address a variety of topics. Admission is $3. Contact the Greater Baltimore Hamboree and Computerfest, POB 95, Timonium, MD 21093, (301) 561-1282.

March 27-30

The 1983 National Conference on Higher Education, Washington Hilton Hotel, Washington, DC. This conference is sponsored by the American Association for Higher Education (AAHE). It features tutorials, workshops, program sessions, and formal addresses. The theme is "Colleges Enter the Information Society." For full details, contact the AAHE, Suite 600, One Dupont Circle, Washington, DC 20036, (202) 293-6440.

March 28-30

The Third Florida Instructional Computing Conference, Curtis Hixon Convention Center and the Hyatt Regency Hotel, Tampa, FL. More than 100 exhibitors will demonstrate educational hardware and software. Conference sessions will be geared toward administrative personnel and teachers. Fourteen workshops will be conducted on such topics as beginning computer literacy, Logo, courseware evaluation, and the administrative uses of computers. For details, contact Dianne Cothran, Florida Department of Education, Educational Technology Section, Knott Building, Tallahassee, FL 32301, (904) 488-0980.

March 28-31

National Design Engineering Show and Conference, McCormick Place, Chicago, IL. The conference is sponsored by the American Society of Mechanical Engineers' design engineering division. It will run concurrently with the National Plant Engineering and Maintenance Show and Conference. Details are available from Clapp & Poliak Inc., 708 Third Ave., New York, NY 10017, (212) 661-8410.

BYTE's Bits

Lobby Letters on Compuserve

Lobby Letters of America, now on-line with Compuserve, lets anyone send a compliment, complaint, or comment to a national or international official, agency, or organization on any well-known issue.

Here's how it works: you supply Lobby Letters with the name of a person, organization, or product, a brief explanation of your comments, and specify whether your letter is satirical or serious. Lobby Letters then composes a professional-looking letter based on this information, supplies the correct address, and sends you the finished product to sign and mail.

Each letter costs $3.50 and is billed to your Compuserve account. Further details are available from Compuserve, 5000 Arlington Centre Blvd., Columbus, OH 43220, (614) 457-8600.■

www.americanradiohistory.com

Circle 179 on inquiry card.

START YOUR OWN COMPUTER CO.

HOW TO START YOUR OWN SYSTEMS HOUSE $36.
7th edition, November 1981
Written by the founder of a successful systems house, this fact-filled 220-page manual covers virtually all aspects of starting and operating a small systems company. Contracts, proposals, agreements and a complete business plan are included in full, and may be used immediately. Proven, field-tested solutions to the many problems facing small turnkey vendors are presented.

HOW TO BECOME A SUCCESSFUL COMPUTER CONSULTANT $28.
by Leslie Nelson, 4th revised edition, December 1981
The rewards of the consultant can be high: freedom, more satisfying work and doubled or tripled income. This manual provides comprehensive background information and step-by-step directions for those interested to explore this lucrative field.

HOW TO START YOUR OWN COMPUTER STORE $145.
1st printing, April 1983
Computer store strategies. Optimum product mix. Brands to avoid. Working with distributors. Software selection. When to consider franchises. Where to find good personnel. Selecting the right location. The start-up plan. The seven best promotion strategies. Financial plan. Three low budget approaches.

HOW TO START YOUR OWN WORD PROCESSING SERVICE $48.
by Leslie Nelson, 2nd edition, November 1982
Turn a small investment into a steady, money making business that adds $10,000, $50,000 or $100,000 to your income. Detailed start-up, marketing and operations plans are included.

HOW TO SELL YOUR MICRO SOFTWARE $19.95
By B.J. Korites, Ph.D, May 1982
The best practical guide for those with software to sell. Detailed discussion of the eight best marketing strategies. How to sell through distributors, brokers, computer manufacturers. Advertising techniques. Pricing. Software security.

Send check, money order, VISA, Master Charge or American Express # and exp. date. Publisher pays 4th class shipping. Add $1.00 per book for UPS shipping (USA only). NJ residents add 6% sales tax. For faster shipment on credit card orders call (201) 783-6940.

ESSEX PUBLISHING CO. Dept. 2
285 Bloomfield Avenue • Caldwell, N.J. 07006

Huntington's Disease... The Genetic Time Bomb!

NATIONAL
HUNTINGTON'S DISEASE ASSOCIATION
Suite 501, 1441 Broadway, New York, N.Y. 10018
212-966-4320

79-11

THIS SPACE CONTRIBUTED BY THE PUBLISHER

new from Wizard
two printer boards

WIZARD-IPI for Apple II*
Smart Printing at a Smart Price

For $87.50 (Suggested Retail) you get the Wizard Intelligent Printer Interface for parallel printers (complete with cable). It offers not only **text printing**, but **enhanced text formatting** such as: line length, left and right margin, page length, software control of automatic line feeds and perforation skips.

Graphics too—hi-res screen dump, alternate hi-res screen dump, 90 degree rotation, inverse video, double-size picture, left margin alignment... all done with single-key commands.

WIZARD-EBI
Up to 64K of Buffering in your Epson MX Series Printer

The Wizard Epson Buffered Interface mounts completely inside any MX Series printer. It provides up to 64K characters of buffering in steps of 8, 16, 32 or 64K, and offloads the time-consuming printing task from the computer to the buffer.

Use your computer for the next task while the printer prints the previous one. The Wizard-EBI, with its on-board 5 volt regulator, will never overload the Epson 5 volt supply as others do.

Suggested Retail (with 8K) $139.00

WESPER MICROSYSTEMS™
A WESPERCORP COMPANY
3188 Pullman Street
Costa Mesa, CA 92626

*Registered trademark Apple Computers, Inc.

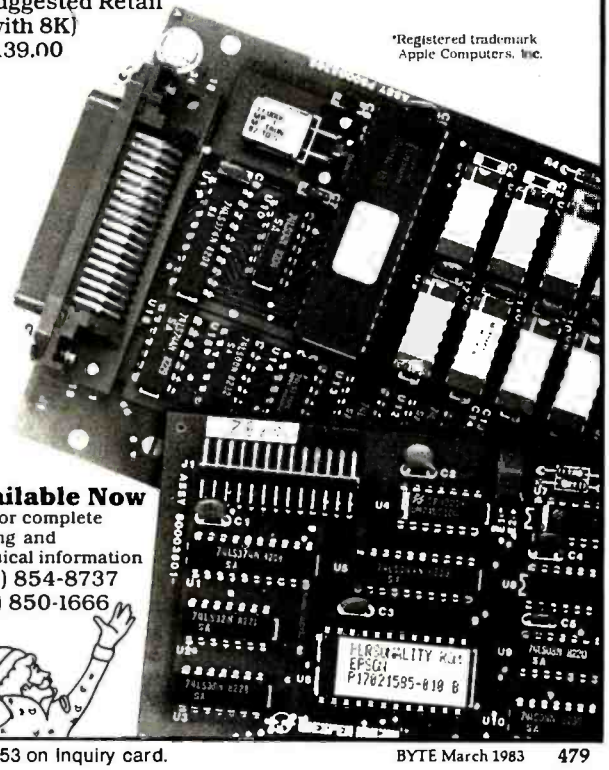

Available Now
Call for complete pricing and technical information
(800) 854-8737
(714) 850-1666

Circle 453 on inquiry card.

www.americanradiohistory.com

Circle 68 on Inquiry card.

Epson, OKI, IDS, NEC, Diablo, Qume

ACOUSTIC ENCLOSURES

- Reduces Noise Up to 90%
- Heavy Duty Acrylic Cover
- Bottom Feed Capability
- Woodgrain Finish

SAVE! SAVE! FROM $99.00

Micro Printercenter™

Dealer & Ordering Info

800-343-4311

Master Charge and Visa Accepted
Shipping & Handling Charges Additional

CAB-TEK, Inc.

Riverside St. Nashua, NH 03062
CIVILIZING COMPUTERS

MPC I $99 (MX 80) MPC II $129 (OKI82)
MPC III $179 (83A, MX100) MCP IV $199 (Daisy Printer)
Power Control & Ventilation $80
Paper Rack $30 Bottom Feed Brackets $30
MPC I SHOWN

SLUDER

THE COMPETITIVE EDGE

CAN BE YOURS! DEALERS...

FUJITSU 10 & 20 MB HARD & OR FLOPPY DISK SUB-SYSTEMS AT ONE LOW PRICE.. NO VOLUME AGREEMENTS READY TO RUN W/CODBOUT DISK I & II. COMPLETE SYSTEMS -- ALSO AVAILABLE AUTHORIZED SPELLBINDER(tm) DISTRIBUTOR

END USERS UPGRADE YOUR CODBOUT SYSTEM
20 MB Fujitsu HD w/ Cab. & P.S. $2950
8" Mitsubishi & 20 MB HD Cab. PS 3500
8" Mitsubishi,20 MB, & 10 Slot ME 3995
CPU Z,64K Sys,20MB,8",10 slt CPM(tm) 6095
85/88,64K Sys,20MB,8",10 slt CPM 6195
MPM 8-16(tm)85/88,256K,20MB,8",10S 8995
85/88,64K Sys,(2)8"floppy,10slt,CPM 2995
LOMAS 10MHz 8086,128K,(2)8",10S,CPM 3795
LOMAS 8MHz 86,128K DRAM,(2)8",10S 3325
LOMAS 5 user MPM86,32MB,8",512K 10S 7995
TELETEK Systemaster (2)8" DSDD 10S 2495
Televideo 925 $689 Televidoe 950 875
Disk 1 w/ CPM 80 445 CB 68000 or 86 489
LOMAS 128K RAM 67 875 LDP 256K DRAM 796
Teltek Systemaster 671 Teletek HDCTC 596
CPM,MPM are tm of Digital Research of CA
Spellbinder is tm of Lexisoft Box 951
Westminster, CA 92683 (714) 895-1746

Circle 395 on Inquiry card.

Event Queue

April 1983

April 3-17

The First London Computer Festival, Central Hall, Westminster, and City University, London, England. Seminars, conferences, exhibitions, workshops, and competitions will be featured. For information, contact the Secretary to the Consortium, GLC Central Computer Service, Room 431, County Hall, London SE1, England; tel: (01) 633-3348.

April 5-8

Computers/Graphics in the Building Process, Convention Center, Washington, DC. The focus of this international event will be on the needs of private sector and federal users for computer/graphics applications in architecture, engineering, design, planning, and management of the building process. This event is cosponsored by the National Academy of Sciences' Advisory Board on the Built Environment (ABBE) and the World Computer Graphics Association (WCGA). For details, contact the WCGA, Suite 399, 2033 M St. NW, Washington, DC 20036, (202) 775-9956.

April 5-8

The Second Annual Convention and Exposition of the Electronic Funds Transfer Association—EFT Expo, Riviera Hotel, Las Vegas, NV. General and concurrent sessions will focus on electronic payment systems and services. Topics to be covered include automated teller machines, home information and financial services, legal issues, and technical standards. Further information is available from the EFT Association, Suite 800, 1029 Vermont Ave. NW, Washington, DC 20005, (202) 783-3555.

April 10-13

APL83, Sheraton Washington Hotel, Washington, DC. This conference and exhibition includes hands-on displays and presentations of technical papers. For details, contact D & S Whyte Associates, Conference and Exhibits Manager, Suite 200, 117 King St., Alexandria, VA 22314, (703) 548-2802.

April 11-13

IBM-MVS Training Seminars, Chicago, IL. Two seminars are offered: "MVS Internals Overview for Data Processing and Operations Management" and "MVS Internals for Systems Programmers." These courses run for 1½ and 2½ days, respectively. For complete information, contact ACTS Corp., 11910 Gate Way, Austin, TX 78759, (512) 258-7869.

April 11-15

Intergraphics '83, Takanawa Prince Convention Center, Tokyo, Japan. This conference and exhibition will cover a wide range of computer-graphics topics, including business and management graphics, virtual machine languages, and chemical and biochemical applications of computer graphics. Contact the World Computer Graphics Association, Suite 250, 2033 M St. NW, Washington, DC 20036, (202) 775-9556.

April 13-20

Hanover Fair '83—Cebit '83, Hanover, West Germany. The Hanover Fair is one of the world's largest industrial trade fairs. Attention will be paid to office equipment and data-processing technology. More than 1200 exhibitors from 30 countries will display their products to a crowd of more than 200,000. Full information is available from the Hanover Fairs Information Center, Salem Industrial Park, POB 338, Whitehouse, NJ 08888,

www.americanradiohistory.com

(800) 526-5978; in New Jersey, (201) 534-9044.

April 14-17

The Second Annual New York Computer Show and Software Exhibition, Nassau Coliseum, Uniondale, NY. This show features printers, software, hard disks, modems, memory cards, cartridges, publications, support services, and other peripherals and accessories. Admission is $5 for adults and $3 for children. Contact Northeast Expositions, 822 Boylston St., Chestnut Hill, MA 02167, (617) 739-2000.

April 15-16

The Thirteenth Annual Virginia Computer Users Conference—VCUC, Marriott Hotel, Blacksburg, VA. This conference is organized and run by the Virginia Tech Student Chapter of the Association for Computing Machinery in cooperation with the Virginia Polytechnic Computer Science Department. Topics of interest include Ada, human factors, and computer graphics. For more information, contact Luanne Melown or Paula Brimer, Virginia Polytechnic Institute and State University, 562 McBryde Hall, Blacksburg, VA 24061, (703) 961-6931.

April 15-17

The Use of Computers in Psychology, Hilton, Wilmington, NC. With a focus on microcomputers, the five planned symposia will explore such issues as statistical and therapeutic applications and the use and misuse of microcomputers in psychological assessment. For complete details, write to Steven R. Edelman, Association of Eastern North Carolina Psychologists, 105 Lou Dr., Goldsboro, NC 27530.

April 16-17

The Eighth Annual Trenton Computer Festival, Trenton State College, NJ. This festival includes short courses, user group meetings, demonstrations, commercial exhibits, and a flea market. Admission for the two days is $5. Contact Dr. Allen Katz, Trenton State College, Hillwood Lakes CN 550, Trenton, NJ 08625, (609) 771-2487.

April 18-21

The Thirteenth International Symposium on Industrial Robots and The Robots 7 Conference and Exposition, Conrad Hilton Hotel and McCormick Place, Chicago, IL. The theme for this event, "Robotics: The Emerging Challenge," will be investigated through more than a dozen conference sessions, four special forums, and three basic sessions. More than 150 companies will exhibit industrial robots and components. This event is cosponsored by Robotics International of the Society of Manufacturing Engineers and the Robot Institute of America (RIA). Full details are available from Ms. Pat Van Doren, Conference Coordinator, SME Technical Activities, One SME Dr., POB 930, Dearborn, MI 48128, (313) 271-1500, ext. 369.

April 19-21

Electro/83—High-Technology Electronics Exhibition and Convention, Coliseum and Sheraton Centre, New York, NY. This show runs concurrently with the Mini/Micro-Northeast exposition. For information, contact Electronic Conventions Inc., 999 North Sepulveda Blvd., El Segundo, CA 90245, (800) 421-6816; in California, (800) 262-4208 or (213) 772-2965.

BDOS ERROR
ON B:BAD SECTOR

Before disk errors ruin your work again order BADLIM.

- BADLIM assures the reliability of your CP/M computer.
- You can use your disks 10 times longer without losing your data AND your time.
- BADLIM checks thoroughly your disk marking all the blocks which have defective sectors. The operating system will know that those sectors should be skipped.
- BADLIM is the only program that gives protection for soft and hard errors.
- The first time BADLIM will list which files in your disk are on bad sectors, so you can take action to correct it.
- But thereafter the bad areas in your disk will be automatically by-passed.
- For CP/M 1.4 single density and for CP/M 2.xx of any format and density. It is a must for Winchester as the media cannot be replaced.

BADLIM cost only $73. Whatever the reason you have to use a computer you need BADLIM. Contact your dealer or call us today:

BLAT R&D Corp., 8016 188th. St SW, Edmonds WA 98020. Phone: (206) 771-1408
DEALER INQUIRIES INVITED.

BADLIM

Circle 58 on inquiry card.

PRECISE DIGITAL DC SOLDERING SYSTEM...

Conquers critical soldering jobs with fingertip temperature control!

- digital display indicates exact handle tip temperature
- adjustable in one degree increments to 680°F
- immediate off-the-shelf delivery
- compact and lightweight
- balanced for comfort
- comes complete (control module, DC power converter, handle with tip, and handle rest)
- deluxe carry case and interchangeable iron clad tips available optionally

belle de st. claire

16147 Valerio St., Van Nuys, CA 91406-2974 • (213) 988-6644 • Telex 65-1397
DEALER INQUIRIES INVITED 800-322-6666

Circle 49 on inquiry card.

www.americanradiohistory.com

Circle 107 on Inquiry card.

From Computer Plus to YOU...

PLUS *after* **PLUS** *after* **PLUS**

Model 16 128K
1 Drive $4199
2 Drive $4799

Color Computer 16K $235
w/16K Ext. Basic $305
w/32K Ext. Basic $420

Model III 16K $699
Model III 48K
2 Disk & RS232 c $1549

Okidata 80 $320
Okidata 82A $399
Okidata 92 $540

Color Computer Disk Drive
Drive 0 $470 Drive 1 $299

Smith Corona TPI
Daisy Wheel $575

BUY DIRECT *Here are just a few of our fine offers... call TOLL FREE for full information.*

COMPUTERS		RS Acoustic Coupler AC-3	134	**DISK DRIVES**	
Model 16 64K 1 Drive	$2699	RS Modem I O C	130	RS Model III 1ST-Drive	650
Model 16 64K 2 Drive	3375	RS Modem II D.C	210	Tandon 40 Track MI	289
Model III 4K LEV I	599	Signalman Modem	89	Color Computer Drive 1	299
MODEL III 16K	699	**PRINTERS**		Color Computer Drive 0	470
MODEL III 48K	764	Daisy Wheel II	1715	Primary Hard Disk MII	3099
Model III 48K		DWP-410	1335	Primary Hard Disk MIII	1999
2 Disk & RS232c	1549	Smith Corona TPI Daisy Wheel	575	**ETC.**	
Color Computer 16K	235	EpsonMX80	499	CCR-81 recorder	52
Color Computer 16K		EpsonMX80FT	569	C C Joysticks	22
w/extended basic	305	Epson MX100	735	16K RAM N E C 200 N S chips	25
Color Computer 32K-64K		CGP-115	199	64K Ram Chips	75
w/extended basic	420	DMP-100	315	Color Computer Flex D O S	99
Pocket Computer 2	230	DMP-200	509	32K Microbutler Inline	229
Model 16 10 Or 12M	4199	DMP-400	1029		
Model 16 20M 12M	4799	DMP-500	1569	Brand Name Software • Send for listing	
DT-1 Data Terminal	599	Okidata80	320	RS Software 10% off list	
PT-210 Portable Terminal	779	Okidata 82A	399		
MODEMS		Okidata83A	655		
Lynx Direct Connect MI MIII	235	Okidata 84 Parallel	999		
Hayes Smart Modem II	235	Okidata92	510		
Hayes Smart Modem 1200	565	Okidata93	859		
Novation Smartcat 1200	459	P C Pioneer Printer	199		

Since 1973 — We have the lowest possible Fully Warranteed Prices AND a full complement of Radio Shack Software.

TOLL FREE 1-800-343-8124

computer plus

P.O. Box 1094
480 King Street
Littleton, MA 01460
617-486-3193

Write for your free catalog

Prices subject to change without notice. Not responsible for typographical errors. TRS-80 is a registered trademark of Tandy Corp

RadioShack TRS-80's Full Line

YOU CAN SAVE money when you buy Radio Shack TRS-80 Computers from **Pan American Electronics.** Pan American Electronics went into business in 1976 and led the way in bringing consumers original Radio Shack TRS-80 Computers at reduced prices.
NO other company has done it longer.
NO other company has done it better and
NO other company sells them for less.

Pan American Electronics

TOLL FREE NUMBER 800/531-7466

1117 Conway Avenue • Department B
Mission, Texas 78572
Phone: 512/581-2766
Telex Number 767339

TM — Trademark of Tandy Corporation

Event Queue

April 19-21

Infocom 83, Town and Country Hotel, San Diego, CA. The theme for this second annual joint conference of the IEEE Computer and Communications Societies is "Computers and Communications Integration: Reality and Illusion." Topics of interest include computer network architectures, computer communications standards, and integrated services digital networks. A series of tutorials will be held the day before this conference begins. For further information, contact the IEEE Computer Society, POB 639, Silver Spring, MD 20901, (301) 589-3386.

April 20-22

Symposium on Computer-Aided Geometry Modeling, Hampton, VA. For information, contact John Shoosmith, Mail Stop 125, NASA Langley Research Center, Hampton, VA 23665, (804) 827-3466.

April 21-22

Computers in Construction, New York, NY. For details, see March 24-25.

April 22

Microcomputers in Physics Instruction, Wilkes College, Wilkes-Barre, PA. This session is sponsored by the Central Pennsylvania Section of the American Association of Physics Teachers. For information, contact F. J. Donahoe, Wilkes College, Box 111, Wilkes-Barre, PA 18766.

April 24-29

The HP 3000 International Users Group Conference, Montreal, Quebec, Canada. The theme for this conference is "Systems Designed with Users in Mind." Technical papers, vendor exhibits, and a lecture by Isaac Asimov will highlight this conference. Full details are available from Ms. Renaye Lee, Conference Manager, HP 3000 IUG, Suite 205, 289 South San Antonio Rd., Los Altos, CA 94022, (415) 941-9960.

April 25-27

The 1983 Symposium on Security and Privacy, Claremont Hotel, Oakland/Berkeley, CA. Papers and panel sessions will explore such topics as security testing and evaluation, application security, and cryptographic protocol. For further details, contact the IEEE Computer Society, POB 639, Silver Spring, MD 20901, (301) 589-3386.

April 25-27

Workshop on Software Engineering Technology Transfer, Konover Hotel, Miami Beach, FL. This workshop will probe some of the problems affecting the use of software engineering tools, techniques, and methodologies, in such areas as marketing, engineering, sales, and customer service. For further information, contact the IEEE Computer Society, POB 639, Silver Spring, MD 20901, (301) 589-3386.

April 26-28

Exploitation '83—The HP1000 International User Group Conference, Heathrow Penta Hotel, Heathrow, London, England. Papers and commercial exhibits about getting the most from your system will be featured. For full details, contact the HP1000 Conference Centre, Conference Services Ltd., 3 Bute St., London SW7 3EY, England; tel: 01-584 4226; Telex: 916054.

April 26-28

Hi-Tech 83, McCormick Place, Chicago, IL. This show will cover all aspects of automated production from design to shipping. Exhibits and sessions will focus on robotics, computer-aided design, and automatic assembly equipment and systems. The Third Information Management Exposition and Conference for

Circle 338 on Inquiry card.

www.americanradiohistory.com

Manufacturing: Info/Manufacturing will run concurrently with Hi-Tech 83. Further information is available from Clapp & Poliak Inc., 708 Third Ave., New York, NY 10017, (212) 661-8410.

April 28-30
Ed Com/Spring '83, Washington, DC. In more than 300 session hours educators will address, evaluate, and analyze the development of computers in education. Demonstrations, seminars, hands-on experience, and panel sessions will display hardware, software, and publications. For more information, contact Carol Houts, Judco Computer Expos Inc., Suite 201, 2629 North Scottsdale Rd., Scottsdale, AZ 85257, (800) 528-2355; in Arizona, (602) 990-1715.

April 28-May 1
The Third Annual Southwest Computer Show and Software Exposition, Market Hall, Dallas, TX. This show features printers, modems, video displays, plug-in boards, cartridges, software, and support services. Admission is $5 for adults and $3 for children. Full details are available from Northeast Expositions, 822 Boylston St., Chestnut Hill, MA 02167, (617) 739-2000.

May 1983

May 1-4
The Thirtieth International Technical Communication Conference, Sheraton-St. Louis Hotel, St. Louis, MO. This conference is sponsored by the Society for Technical Communication (STC). It will focus on such issues as industrial instruction, consumer education, and safety. For full details, contact the STC, 815 15th St. NW, Washington, DC 20005, (202) 737-0035.

May 2-5
Test and Measurement World Expo, Convention Center, San Jose, CA. More than 50 workshops will explore instruments and techniques critical to performing timely and cost-effective failure analyses of microelectronic circuits and components. Topics to be addressed include X-ray microradiography and surface analysis techniques. Full particulars are available from Meg Bowen, Test and Measurement World Expo, 215 Brighton Ave., Boston, MA 02134, (617) 254-1445.

May 10-11
Selecting a Microcomputer for Scientific and Engineering Applications, Golden, CO. For details, see March 15-16.

May 10-12
Mini/Micro-Northwest, Portland, OR. Running concurrently with Northcon/83, this show addresses such topics as aerospace electronics, laser applications, and signal and image processing. Contact Electronic Conventions Inc., Suite 410, 999 North Sepulveda Blvd., El Segundo, CA 90245, (800) 421-6816; in California, (800) 262-4208 or (213) 772-2965.

May 11-15
Computa '83: The Third International Exhibition on Computer and Information Processing Technology, World Trade Centre, Singapore. Information is available from Kallman Associates, 5 Maple Court, Ridgewood, NJ 07450, (201) 652-7070.

May 16-19
National Computer Conference, Anaheim and Disneyland Hotel Convention Centers, Anaheim, CA. This show features exhibits of computer products and services, technical sessions, seminars, and formal addresses. For complete information, contact the American Federation of Information Processing Societies Inc., 1815 North Lynn St., Arlington, VA 22209, (703) 558-3624.

May 17-20
Technology/Invention New Product Expo, Expo Mart, Monroeville, PA. This show will feature everything from diesel fuel-injection systems to spring-loaded fly swatters. Further details can be obtained from Gary F. Brown, Technology/Inpex, Suite 400, 701 Smithfield St., Pittsburgh, PA 15222, (412) 288-1344.

May 18-20
The Fifth National Conference of the Cognitive Science Society, University of Rochester, Rochester, NY. This conference will consist of lectures, panels, commentaries, and papers. Contact the Cognitive Science Conference, Dewey Hall, University of Rochester, Rochester, NY 14627, (716) 275-5402.

May 18-20
Mipro-83: The Sixth Microprocessors/Microcomputers Course/Conference, Congress Center, Hotel Adriatic, Opatija, Yugoslavia. The theme for this conference is "Advanced Microcomputer Application Techniques and New Trends." It is geared toward hardware and software specialists and managers involved with the development, production, and management of microcomputer-based systems. For details, contact Mr. P. Dragojlović, Mipro Secretariat, Trg P. Togliatti 4, 51000 Rijeka, Yugoslavia.

May 19-20
Computers in Construction, Denver, CO. For details, see March 24-25.

May 22-25
The Eighteenth Annual Meeting and Exhibit Program of the AAMI, Loews Anatole, Dallas, TX. Topics on the docket include anesthesia instrumentation and technology, computer applications, personnel management, and technology transfer. Roundtable discussions, tutorials, and an exhibit program will be featured. For details, contact the Association for the Advancement of Medical Instrumentation, Suite 602, 1901 North Fort Meyer Dr., Arlington, VA 22209, (703) 525-4890.

May 31-June 2
The Second Canadian Computer-Aided Design/Computer-Aided Manufacturing and Robotics Exposition and Conference, International Centre, Toronto, Ontario, Canada. Leading international companies will demonstrate industrial robots, automatic assembly equipment, optical scanners, and numerically controlled machine tools. Technical papers will focus on such topics as robot-vision systems and design analysis. For information, contact Hugh F. Macgregor & Associates, 662 Queen St. W, Toronto, Ontario M6J 1E5, Canada, (416) 363-2201.■

In order to gain optimal coverage of your organization's computer conferences, seminars, workshops, courses, etc, notice should reach our office at least three months in advance of the date of the event. Entries should be sent to: Event Queue, BYTE Publications, POB 372, Hancock NH 03449. Each month we publish the current contents of the queue for the month of the cover date and the two following calendar months. Thus a given event may appear as many as three times in this section if it is sent to us far enough in advance.

www.americanradiohistory.com

Software Received

Apple

APAD 2.0, a set of three programs for designing impedance matching and attenuation circuits for use in audio-frequency transmission circuits. The programs design T, PI, H, and O pads. For the Apple II Plus; cassette or floppy disk, $15. Forbes Enterprises, 21832 99th Ave. SE, Snohomish, WA 98290.

Apple BASIC: Data File Programming, a book and software combination. This package shows you how to create and maintain data files. Using a step-by-step approach, you can write a simple database-management program. For the Apple II; floppy disk, $19.95. Wiley Professional Software, 1 Wiley Dr., Somerset, NJ 08873.

Banner Magic, a program that can create lettered banners. Using any printer, you can enter your message and have it printed with letters up to 7 inches high. Program options are entered via a menu. For the Apple II; floppy disk, $24.95. Phoenix Software Inc., 64 Lake Zurich Dr., Lake Zurich, IL 60047.

Computing Without Mathematics, a book and software combination. This package offers a hands-on approach to learning the essentials of BASIC and Pascal. Word processing and data management are also covered. For the Apple II; floppy disk, $25. Microcomputer Educational Materials, POB 6184, Santa Barbara, CA 93111.

Editor/Assembler, an editor and assembler package that features disk-oriented, menu-driven operation within memory emulation. This package includes full-screen editor and detailed manual. For the Apple II; floppy disk, $89.95. Custom Micro Systems Ltd., 16921 108th St., Edmonton, Alberta T5X 3B2, Canada.

Interstellar Sharks, an adventure-type game. You become a member of a vast galactic corporate empire. Your goal is to reach the planet Triskelion by choosing a character and following a career path to success. For the Apple II; floppy disk, $32.95. Interactive Fantasies Inc., 28035 Dorothy Dr., Agoura, CA 91301.

Jawbreaker, an arcade-type game. You find yourself in a candy store. You must negotiate a maze, eat the candy, and avoid the happy faces which are trying to catch you and pull your teeth. For the Apple II and III; floppy disk, $29.95. Sierra On-line Inc., 36575 Mudge Ranch Rd., Coarsegold, CA 93614.

Linear Programming Model, a program to develop a model for the allocation of resources based on mathematical formulas. Variables in the formula correspond to resources and resource constraints. For the Apple II; floppy disk, $29.95. Microphase Systems, POB 10461, Tallahassee, FL 32302.

Lunar Leeper, an arcade-type game for one player. You start by rescuing your men from the Lunar Leepers and progress toward the destruction of the giant eyeball. Eight levels of play. For the Apple II and III; floppy disk, $29.95. Sierra On-line Inc. (see address above).

Micro on the Apple, Volume 3, a book and software combination. This package includes programming aids for Applesoft and machine language, graphics utilites, games, and tutorial and reference articles. For the Apple II; floppy disk, $24.95. Micro Ink Inc., POB 6502, Chelmsford, MA 01824.

PFS: Graph on the Apple III, a graphics development package. It is designed to produce bar, line, or pie charts with labels and to work with the PFS:File package, Visicalc files, or to stand alone. For the Apple III; floppy disk, $125. Software Publishing Corp., 1901 Landings Dr., Mountain View, CA 94043.

Pest Patrol, an arcade-type game. The object of this game is to kill all the insects. You are given five cans of bug spray to use. But beware: the bugs are tough and fight back with bombs. For the Apple II and III; floppy disk, $29.95. Sierra On-line Inc. (see address above).

Proof, a spelling checker/proofreader program. It can accept input from the keyboard or floppy disk. Files can be either ASCII, text, or binary. The dictionary contains 44,711 words. For the Apple II; floppy disk, $192. Cambrian Software, Gwynllys, Groeslon, Caernafon, Gwynedd, LL54 7ST, Wales.

Sherwood Forest, a graphics adventure-type game. You must help Robin Hood win the hand of Maid Marian. You control his actions through simple commands in order to move around Sherwood Forest. For the Apple II; floppy disk, $34.95. Phoenix Software Inc. (see address above).

Spy's Demise, an arcade-type game. Your mission is to find the solution to the secret code. You must avoid the guards and collect the clues that are hidden throughout the diplomatic mission. For the Apple II; floppy disk, $29.95. Penguin Software, 830 4th Ave., Geneva, IL 60134.

Atari

Basics of Animation, a set of tutorial programs designed to show you how to move shapes on a video screen. The package covers the PRINT and PLOT commands and the use of player/missile graphics. For the Atari 400/800; floppy disk, $19.95. Educational Software Inc., 4565 Cherryvale Ave., Soquel, CA 95073.

Dragonstomper, an arcade- and adventure-type game. You have been cast back into the past where you must battle and search for the Amulet of the Druids. The game features three levels of play. For the Atari Video Computer System; cartridge, $17.95. Starpath Corp., POB 209, Santa Clara, CA 95050.

The Home Filing Manager, a simple database-management program. The program and manual help you develop your own computerized filing system using an index-card format for data storage. For the Atari 400/800; floppy disk, $49.95. Atari Inc., 1312 Crossman Rd., POB 61657, Sunnyvale, CA 94086.

Mad-Netter, an arcade-type game. As the Mad-Netter, you must try to capture all the butterflies to score points. But beware of the killer bees, slimy snakes, and mad dogs. For the Atari 400/800; floppy disk, $34.95. Computer Magic Ltd., POB 2634, Huntington Station, NY 11745.

Monster Maze, an arcade-type game. You are trapped in a three-dimensional maze and more than 40 mutants are chasing you. You must collect gold bars and vitamins to escape. For the Atari 400/800; cartridge, $39.95. Epyx/Automated Simulations Inc., 1043 Kiel Court, Sunnyvale, CA 94086.

Platter Mania, an arcade-type game. You beome a circus performer doing the famous spinning plate trick. Keep your plates spinning on the sticks; the more plates, the higher your score. For the Atari 400/800; cartridge, $39.95. Epyx/Automated Sim-

www.americanradiohistory.com

ulations Inc. (see address above).

Pogoman, an arcade-type game. As Pogoman, you must help the city conserve electricity by turning off all the street lights. You leap about avoiding cars, cats, chickens, and fire hydrants. For the Atari 400/800; floppy disk, $39.95. Computer Magic Ltd. (see address above).

Sound & Music, an educational program. This package introduces Atari computer owners to audio programming techniques. It ranges from simple SOUND statements to chords and complete songs. For the Atari 400/800; floppy disk, $19.95. Educational Software Inc. (see address above).

Speedway Blast, an arcade-type game. Your neighborhood has been invaded by asphalt-eating monsters. You must jump into your hot rod and blast the buggers. You must be wary of monster eggs and holes. For the Atari 400/800; cartridge, $39.95. Innovative Design Software Inc., POB 1658, Las Cruces, NM 88004.

CP/M

AList, a database-management program. This program is set up to handle alphabetically ordered information (e.g., telephone or mail lists), but can be configured for other uses. For CP/M-based systems; floppy disk, $150. Honor System Software, 2562 East Glade, Mesa, AZ 85204.

Forest, an adventure-type game. The King has given you a mission to complete in his forest. It may be as simple as gathering firewood or as difficult as destroying an evil creature. For CP/M-based systems; floppy disk, $29.95. Centaur, 501 Jackson, Charleston, IL 61920.

Trakmaster, a disk-library cataloging system. This system lets you maintain expanded descriptions of each file, locate a file by its description, and easily make backups and copies of files. For the CP/M-based systems; floppy disk, $150. Microfusion, Suite 105, 5580 La Jolla Blvd., La Jolla, CA 92037.

IBM Personal Computer

Expense-Track I, a menu-driven program to keep track of expenses in the home or small business. Each expense has a date, description, category, method and payment code, and tax status. For the IBM Personal Computer; floppy disk, $29. Sapana Micro Software, 1305 South Rouse, Pittsburg, KS 66762.

Fun Key, a utility to program IBM Personal Computer function keys. All 10 keys can be programmed for commonly used commands. Files of function-key commands can be saved for use with any applications program. For the IBM Personal Computer; floppy disk, $24.95. Bourbaki Inc., 431 Main St., Boise, ID 83702.

Galactic Encounters, a Star Trek-type game. You become the commander of an Illiad Star Cruiser. You must destroy all the Kaons in your galaxy. Your ship is equipped with phasers, torpedoes, and energy shields. For the IBM Personal Computer; floppy disk, $34.95. Micro Productions Inc., POB 147, Georgetown, TX 78626.

Invoice-Generator-PA/DO, a program to maintain and print invoices for a dentist's office. Based on forms for the Illinois Department of Public Aid, this program stores data on up to 275 invoices per disk. For the IBM Personal Computer; floppy disk, $49. Sapana Micro Software (see address above).

Mail-Track I, a mailing-list maintenance program. This program keeps your mailing list in ZIP code order and allows you to search, sort, edit, and delete entries. It can attach special messages to labels, as well as print the labels. For the IBM Personal Computer; floppy disk, $29. Sapana Micro Software (see address above).

Xywrite, a text-editing system that edits standard ASCII text files. It can merge files and print while editing. Online prompting is standard. For use with 40- or 80-column displays. For the IBM Personal Computer; floppy disk, $50. Xyquest Inc., POB 372, Bedford, MA 01730.

TRS-80

Fast BASIC Beyond TRS-80 BASIC, a book and software combination. This package shows you how to increase the speed of your programs by combining machine-language subroutines with BASIC programs. For the TRS-80 Models I and III; cassette or floppy disk, $19.95. Wiley Profes-

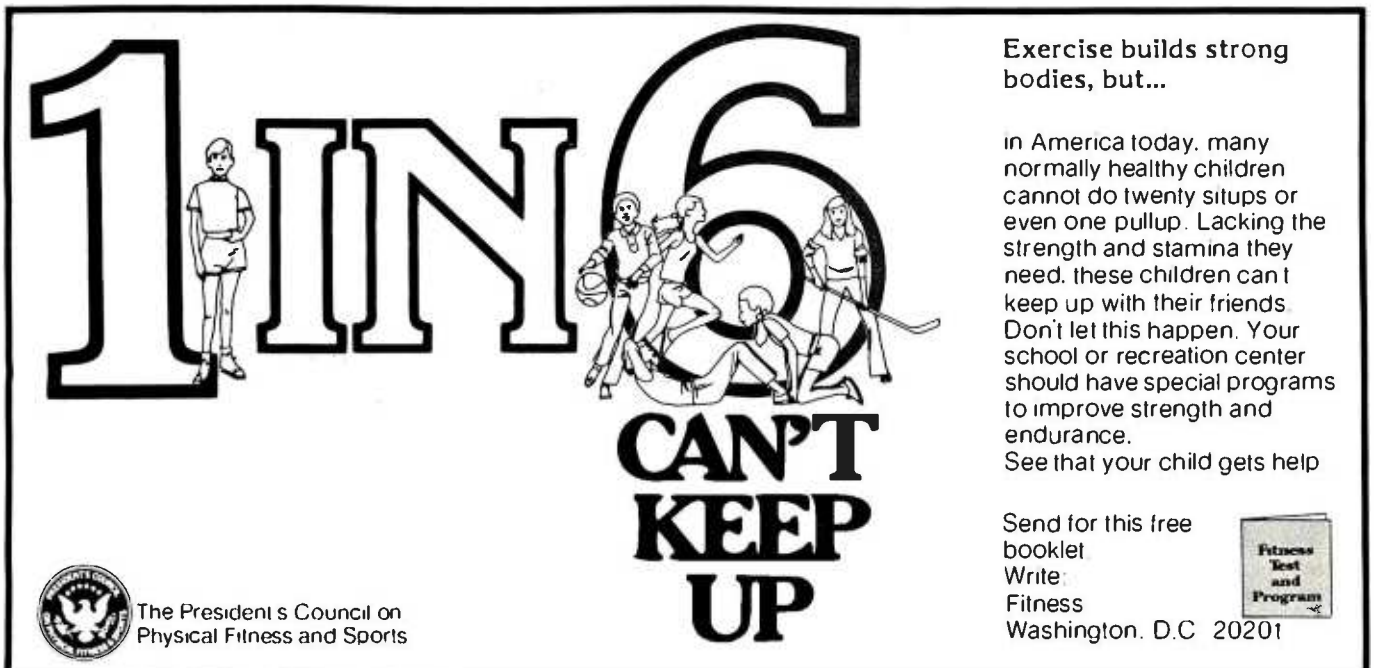

www.americanradiohistory.com

sional Software, 1 Wiley Dr., Somerset, NJ 08873.

The TRS-80 Means Business, a book and software combination. This package covers the basics of using the Model II for day-to-day business applications. The program disk includes modules to develop your own programs. For the TRS-80 Model II; floppy disk, $32.90. Wiley Professional Software (see address above).

VIC-20

Paratrooper, an arcade-type game. You must shoot the helicopters and paratroopers falling from the sky. Game has four levels of play. For the VIC-20; cassette, $19.95. The Electric Co., POB 388, Lake Havasu City, AZ 86403.

Quick Brown Fox, a word-processing package that has all standard word-processing features. It operates by means of menu selections. Files may be saved on disk or cassette. For the VIC-20 and Commodore 64; cartridge, $65. Quick Brown Fox, Suite 4F, 548 Broadway, New York, NY 10012.

Rescue at Rigel, an adventure game with graphics. Your mission is to rescue the 10 prisoners from the hands of the High Tollah, a race of evil aliens. You must beat the clock to free the prisoners. For the VIC-20; cassette, $29.95. Epyx/Automated Simulations Inc., 1043 Kiel Court, Sunnyvale, CA 94086.

Sword of Fargoal, an adventure game with graphics. You enter an everchanging dungeon searching for the Sword of Fargoal. You must grope your way through the dungeon and fight the monsters. For the VIC-20; cassette, $39.95. Epyx/Automated Simulations Inc. (see address above).

ZX81

Compu-Stat, a statistics package that calculates most descriptive statistics and includes mean, median, 95-percent confidence limits, standard deviation, variance, range, and other methods. For the Timex/Sinclair 1000 and ZX81; cassette, $9.95. Computercraft, 156 Drakes Lane, Summertown, TN 38483.

CFastduet, two utility programs that quickly read and write programs and data to a cassette tape. These programs can read or write data files. Requires 16K bytes of RAM. For the Timex/Sinclair 1000 and ZX81; cassette, $21.50. Cosmonics, POB 10358, San Jose, CA 95157.

Fun and Games Package, a set of three programs. Draw pictures on the screen, pilot a Lunar Lander on the moon, and make and break secret codes. For the Timex/Sinclair 1000 and ZX81; BASIC listing, $1. Florida Creations, POB 16422, Jacksonville, FL 32245.

Tax Return Helper, a set of seven programs for the preparation of 1982 income tax returns. This package covers IRS forms 1040 and schedules A, B, C, C1/C2, D, and E. The forms can be printed or saved on tape. For the Timex/Sinclair 1000 and ZX81; cassette, $14. Ksoft, 845 Wellner Rd., Naperville, IL 60540.

Other Computers

Visi-Checkbook, a program that stores a full year's worth of checkbook entries and allows you to balance your checkbook, prepare month-to-month comparisons, analyze single expenses, and draw a bar graph of expenses. For the TI-99/4A; cassette, $12.98. Design Strategies, 69-B Bethel Church Rd., Jackson, NJ 08527.■

This is a list of software packages that have been received by BYTE Publications during the past month. The list is correct to the best of our knowledge, but it is not meant to be a full description of the product or the forms in which the product is available. In particular, some packages may be sold for several machines or in both cassette and floppy-disk format; the product listed here is the version received by BYTE Publications.

This is an all-inclusive list that makes no comment on the quality or usefulness of the software listed. We regret that we cannot review every software package we receive. Instead, this list is meant to be a monthly acknowledgment of these packages and the companies that sent them. All software received is considered to be on loan to BYTE and is returned to the manufacturer after a set period of time. Companies sending software packages should be sure to include the list price of the packages and (where appropriate) the alternate forms in which they are available.

BYTE's Bits

Educational Journal Seeks Articles

Elementary School Guidance and Counseling will devote its Fall 1983 issue to the impact of computers on elementary schools. Articles that focus on the implications of computers in schools for guidance counselors are sought. For information or to submit an article for consideration, contact Dr. Don Dinkmeyer Jr., 4010 Northwest 99 Ave., Coral Springs, FL 33065, or Dr. Jon Carlson, Route 4, Box 492, Lake Geneva, WI 53147.■

Tarbell Double Density Floppy Disk Interface

FOR 8" DISK DRIVES

Under Tarbell Double-Density CP/M, single and double density disks may be intermixed. The system automatically determines whether single or double density is in place.

- Software select single or double density.
- Phase-locked-loop and write precompensation for reliable data recovery and storage.
- On-board phantom bootstrap PROM is disabled after bootstrap operation so all 64K memory address space is available to user.
- DMA in single or double density permits multi-user operation.
- Extended addressing provides 8 extra address bits, permitting direct transfer anywhere in a 16 megabyte address range.
- Select up to 4 drives, single or double sided.
- New BIOS for CP/M included on single-density diskette.

CP/M is a reg. trademark of Digital Research.

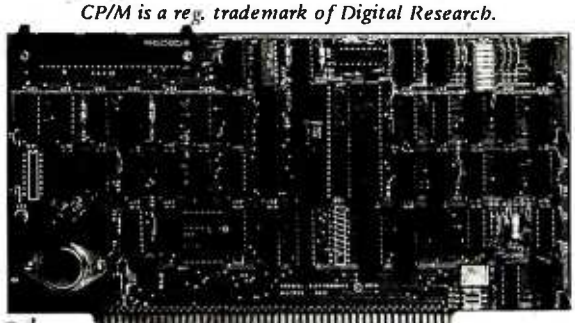

Tarbell Electronics 950 Dovlen Place, Suite B Carson, Ca. 90746 (213) 538-4251 (213) 538-2254

Circle 414 on Inquiry card.

www.americanradiohistory.com

Ask BYTE

Conducted by Steve Ciarcia

Pascal Talking Sweet on OSI

Dear Steve,

I have heard a lot of talk about the Pascal language, and everyone seems to say it's a good language. I want to take a course in Pascal, but I would like to have a computer at home with a Pascal compiler. I own an OSI (Ohio Scientific Inc.) C1P but there doesn't seem to be a version of Pascal for it. Do you know of any company that has one? What would be involved in custom-designing a compiler for my machine? Also, how do I amplify the output signal from an I/O port to drive a small motor or relay through a transistor?

I'm also thinking of interfacing your speech synthesizer to my C1P. My "Centronics" parallel interface, though, has a few lines that I don't understand. What are the signals: $\overline{PL}$, $\overline{F}$, $\overline{RS}$, $\overline{DS}$, $\overline{ACK}$, and $\overline{BUSY}$? Which ones do I connect to STB, $\overline{A/R}$, $\overline{ENABLE}$, and GND connections of the Sweet Talker?

Marc Weigel
Delta, British Columbia, Canada

A tiny Pascal is available for OSI computers. It uses the OS65D operating system and is implemented in fig-FORTH. It's available for $65 from OSI Software & Hardware, 3336 Avondale Court, Windsor, Ontario N9E 1X6, Canada.

Assuming that you have a TTL-level output port on your computer, all that is necessary for driving a small motor or relay is to use this output to control an NPN transistor as shown in the schematic diagram (figure 1).

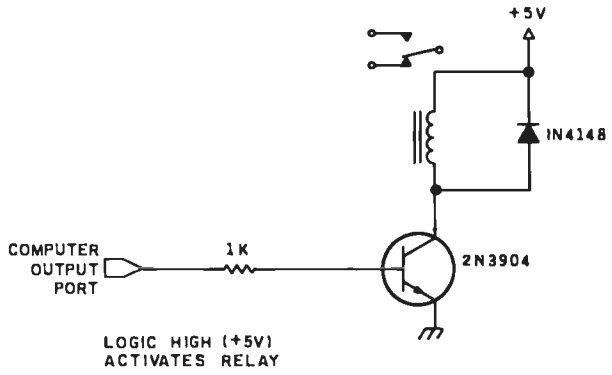

Figure 1

Here's how the Sweet Talker speech synthesizer can be attached to your Centronics output port: the data strobe $\overline{DS}$ is connected to the $\overline{STB}$ line on the Sweet Talker (pin 21). The $\overline{BUSY}$ line is hooked to the $\overline{A/R}$ line (pin 8). The $\overline{UNIT\ SELECT}$ (pin 25 of the Centronics port) should be tied to pin 34 (ground) of the Centronics port and to pins 12 ($\overline{ENABLE}$) and D (ground) of the Sweet Talker board. . . . **Steve**

Decoding Rotary Pulses

Dear Steve,

I would like to build a pulse decoder for remote control that's similar to the Touch-Tone decoder in your December 1981 Circuit Cellar, except that I want to be able to decode rotary-dial pulses. (See "Build a Touch-Tone Decoder for Remote Control," page 42.)

I have connected the leads from the earpiece of my phone to the cassette input port on my Apple II Plus. My program writes the values of this address into memory, but the numbers make no sense because they fluctuate even when I have no input to the port.

Should I use a bandpass filter to detect the pulses? If so, what would the frequencies be?

I'm really stuck, Steve. Any suggestions or ideas you could give me would be greatly appreciated.

Thanks.

Hans Tanner
Montreal, Quebec, Canada

Before discussing your problem with the cassette interface for pulse-tone decoding, I should warn you that the pulses sent by a rotary-dial telephone go to the central office only and are not available at extension phones on the same line. If you plan to use this method for telephone remote control, you will be unsuccessful.

The Apple II's cassette port is designed to look for high-frequency pulses at a particular rate and not at relatively random, low-frequency pulses. Hence, your cassette port is not the proper input port. Amplify the pulses from the telephone receiver and use the output of the amplifier to switch a transistor. The output of the transistor can feed a 5-volt signal to a one-shot circuit to yield clean pulses of a known width. These pulses can then be easily counted and used for whatever purpose you desire. . . . **Steve**

Take My APU. . . Please

Dear Steve,

I have been reading your column since you began writing for BYTE and have enjoyed it very much. I also enjoyed your book *Take my Computer. . .Please* (available fron BYTE/McGraw-Hill Book Co., POB 400, Hightstown, NJ 08520).

One topic you, along with most of the industry, seem to have ignored: designing with arithmetic processors (APUs) and APU peripherials (e.g., Intel's 8231-2). Is there a reason for this? I am very interested in such devices but find the lack of information discouraging.

Can you provide any information on these devices or let me know if you plan to discuss them in the future?

Michael Scott
Downers Grove, IL

APUs are tricky devices that are rather difficult to work with because they don't always function as intended. Also, special software must be written to drive them, due to the fact that most high-level languages have their own arithmetic routines.

APUs do, however, offer increased processing speed. They are mainly used in dedicated applications, and there has been very little interest in them for microcomputer applications. Finally, you're right: there is not much literature available, other than from the manufacturers. . . . **Steve**

www.americanradiohistory.com

Circle 173 on inquiry card.

Edix™ + Wordix™ has word processing features that our competitors are still dreaming about . . .

$390 buys the whole dream.

Edix Editing Features
Up to 4 screen windows
Up to 12 file buffers
Top-to-bottom and side-to-side scrolling.
Regular expression searching and translating
Intra- and inter-buffer moving and copying
Online help
Online tutorial

Wordix Formatting Features
Auto footnotes
Auto table of contents
Auto hyphenation
Multi-line headers and footers
Multi-column layout
Powerful macros
Data file access

Requires 128K IBM PC
Edix alone: $195

EMERGING TECHNOLOGY

2031 Broadway Boulder, Colorado 80302 303 447-9495
For more information, or to place an order, call toll-free 800-782-4896.

TM Trademark of Emerging Technology Consultants, Inc.

$595.00

The Last Expansion Unit You Will Ever Have To BUY

The six most commonly required add-on features for your IBM PC

Without Using Any Additional Slots!

- Six additonal system slots.
- Up to 256kof additional memory with our exclusive DPECC (R) (Dynamic Parity Error Correcting Circuitry)*
- Two Asynchronous serial ports.*
- Three parallel ports.*
- Real Time Clock.*

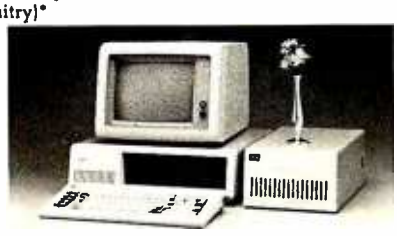

The 256k RAM, 2 asynchronous serial ports, 3 parallel ports, and a Real Time Clock are all built on to the motherboard, so you won't have to waste precious slots on them.

The Expansion Unit comes without these options installed.* So you don't have to pay for them if you don't need them. But when you do, all you have to do is plug in the chips and you are ready to go.

All options are available installed with the Expansion Unit.

RCS
2116 WALSH AVENUE
SANTA CLARA, CA 95050
(408) 727-7548

Ask BYTE

Sophisticated Modems Expensive

Dear Steve,

I'm a college student, and I'll be taking some computer courses this fall. I've been using my OSI (Ohio Scientific Inc.) Challenger 1P as a remote terminal to access Dartmouth timesharing. It has worked fairly well, but its 23-character line and 300-bps (bit per second) acoustic modem, which date from the Dark Ages, have tested the limits of my patience.

I'm planning to buy a standard video terminal, which will solve one problem. Do you know of any plans for building a 1200-bps originate-only modem? The cheapest (assembled) ones I can find cost more than $600 and do everything but make coffee. What makes these units so expensive?

Greg Beasley
Dartmouth College
Hanover, NH

The 1200-bps modems on the market today are indeed sophisticated and expensive. They offer a multitude of features that enhance communications with the many database utilities—e.g., The Source and Compuserve—that now proliferate. One reason for their high cost lies in the complexity of the filters that are required to transmit and receive data over a standard telephone line. These filters determine important operating parameters, such as signal-to-noise ratio and dynamic range, and can affect receiver sensitivity and adjacent channel rejection.

Two standards for 1200-bps modems have evolved: Bell Model 202 and Bell Model 212. The Bell Model 202 requires significantly greater bandwidth and is limited to half-duplex operation on 2-wire lines. The Bell Model 212 is the preferred standard and is the one that is used in those expensive modems. . . .
Steve

A Simple Break Key In One-Shot

Dear Steve,

I have an Osborne 1 that I would like to expand with both a communications device (e.g., a modem) and interface to the S-100 bus. This, however, presents two somewhat unrelated problems.

First, many commercial data-processing systems recognize the Break key, but most software-terminal packages ignore this command. However, the Break key is often the only way to interrupt a service bureau during transmission. The service bureaus recognize the Break key on most terminals, but they do not respond to control C or any other set of characters, including escape. What is the Break signal, and how can I achieve it?

My second question concerns mating the S-100 bus to an Osborne 1. Osborne, perhaps attempting to cut expenses, did not bring out any of the system buses. I know that the 8080 and the Z80 use the S-100 bus, but some interfacing is required. Could you tell me something about that, or at least where to look? I use my IEEE port to drive my printer, so I feel that it would not be a good choice for hard disks, etc.

Thank you.

Barry Millman
Ottawa, Ontario, Canada

The Break key is used to indicate a need for immediate attention. It's a unique signal and is not in the standard ASCII code. Pressing this key causes the data line to go high for approximately 300 ms (milliseconds) and is interpreted by the computer as a break signal. This condition always occurs when you're

Circle 376 on inquiry card.

www.americanradiohistory.com

operating in a full-duplex mode, but it can occur during half-duplex operation only when the terminal is transmitting. When the computer is transmitting, the Break key is unrecognized. A simple way to achieve this 300-ms pulse is through the use of a one-shot circuit.

An excellent description of the S-100 bus and interfacing other buses to it can be found in the book by Elmer C. Poe and James C. Goodwin The S-100 & Other Micro Buses, *published by Howard W. Sams & Co. Inc. . . .* **Steve**

Bank Selecting Addresses More Memory

Dear Steve,

I own an Atari 800 and wish to increase its memory (it has 24K bytes now). While reading a recent issue of BYTE, I saw an ad for a 128K-byte RAM card. But as I understood it, the Atari can use only 48K bytes of memory. How can the Atari use the additional 80K bytes? Also, what is bank-selected memory and how is it used?

Mark Webb
Miles City, MT

While the 6502 processor in the Atari 800 can address 64K bytes of memory, 16K bytes of address space are reserved for ROM (read-only memory) and I/O (input/output) ports. Therefore, the maximum memory that can be addressed is 48K bytes.

More than 48K bytes can be addressed by a technique known as bank selecting. *By using one of the I/O ports, different blocks of memory can be selected and addressed. In the case of the 128K-byte RAM card, an additional 104K bytes of memory are available for program storage. This memory can be used as if it were a disk, but it's much faster because its access time is on the order of microseconds.*

With this arrangement, it is possible to load many graphic pictures into memory and call them to the screen very quickly. A database or dictionary can also be bank-selected to decrease search time. . . . **Steve**

Silent 700 Turned Into a Printer

Dear Steve,

My company recently bought a Radio Shack TRS-80 Model II. We also have a neglected Texas Instruments Silent 700 portable terminal (from our timesharing days). Is there a way to use the TI terminal as a printer? If so, how?

Gary G. Schwartz
New York, NY

Connecting a terminal to a computer is simply a matter of wiring it to the serial or parallel port. Use the Model II's serial port in your case. The TRSDOS operating system has printer setup commands that allow proper configuration of your particular printer.

Because there are so many versions of the TI Silent 700, it's possible that the input port on your unit has an acoustic coupler, rather than a serial-interface port. It is then necessary to go inside the box and find the serial output from the coupler. Consult TI for information or obtain the terminal's schematic diagram to see how this can be accomplished.

As a last resort, an inexpensive modem such as the one described in this month's Circuit Cellar, "Build the ECM-103, An Originate/Answer Modem" (page 26), can be connected between the terminal and the computer. This would eliminate any internal wiring and still provide the printer features. . . . **Steve**

Correction

The Pickles & Trout TVM-04 direct-entry video kit mentioned in the January 1983 Ask BYTE is no longer available. I apologize for any inconvenience this may have caused. . . . **Steve** ■

In "Ask BYTE," Steve Ciarcia answers questions on any area of microcomputing. The most representative questions received each month will be answered and published. Do you have a nagging problem? Send your inquiry to:

Ask BYTE
c/o Steve Ciarcia
POB 582
Glastonbury CT 06033

If you are a subscriber to The Source, chat with Steve (TCE317) directly. Due to the high volume of inquiries, personal replies cannot be given. Be sure to include "Ask BYTE" in the address.

Circle 143 on Inquiry card.

4-BAR LINKAGE ANALYSIS
3-POINT MOTION GENERATION

THIS PROGRAM WILL:
- Design 4-bar linkages
- Assemble linkages
- Rotate linkages
- Plot linkage paths
- Trace the linkage
- Eliminate undesirable linkages
- Automatically increment inputs

APPLE II PLUS 48K DOS 3.3
Disk and Manual...$48
Manual.....$ 5

Send check or money order to:
RESEARCH & ENGINEERING
PO BOX 11407
MILW. WI 53211 (414) 964-3662

Circle 136 on Inquiry card.

Dysan DISKETTES

5 1/4" SPECIFY SOFT, 10 or 16 SECTORS

	PART #	PRICE 10	PRICE 50	PRICE 100
SSSD	DYS104-1	38.40	178.00	342.00
SSDD	DYS104-1D	40.40	188.00	361.00
DSDD	DYS104-2D	47.30	221.00	426.50
DSQD	DYS204-2D	55.00	258.00	498.00

8" SPECIFY SOFT or 32 SECTORS

	PART #	PRICE 10	PRICE 50	PRICE 100
SSSD	DYS101-1	40.40	189.00	362.00
SSDD	DYS101-1D	49.40	230.00	444.00
DSDD	DYS101-2D	57.00	267.00	516.00

CALL TOLL FREE - ORDERS ONLY
800-824-7888 ALL STATES EXCEPT CA
800-852-7777 FOR CA RESIDENTS
ASK FOR OPERATOR #906

CHECKS, MO, VISA, MC. - ADD $2.00 SHIPPING
CA RESIDENTS ADD 6% SALES TAX

Creativity Unlimited
P.O. Box 3304, Saratoga, CA 95070-1304
(408) 252-4210

Circle 126 on Inquiry card.

www.americanradiohistory.com

Books Received

CBM Professional Computer Guide, Adam Osborne, Jim Strasma, and Ellen Strasma. Berkeley, CA: Osborne/McGraw-Hill, 1982; 512 pages, 37 by 55 cm, softcover, ISBN 0-931988-75-6, $15.

The Complete Home Video Handbook, Mark Dunton and David Owen. New York: Random House, 1982; 224 pages, 43 by 62 cm, hardcover, ISBN 0-394-52761-5, $19.95.

Decision Tables in Software Engineering, Richard B. Hurley. New York: Van Nostrand Reinhold, 1983; 176 pages, 37 by 55 cm, hardcover, ISBN 0-442-23599-2, $18.95.

Design of Computer Data Files, Owen Hanson. Rockville, MD: Computer Science Press, 1982; 358 pages, 37 by 56 cm, hardcover, ISBN 0-914894-17-X, $24.95.

Digital and Microprocessor Engineering, S. J. Cahill. New York: Halsted Press, 1982; 513 pages, 15.5 by 23.5 cm, hardcover, ISBN 0-470-27301-1, $89.95.

Essentials of COBOL Programming: A Structured Approach, Gerald N. Pitts and Barry L. Bateman. Rockville, MD: Computer Science Press, 1982; 145 pages, 36 by 53.6 cm, softcover, ISBN 0-914894-34-X, $14.95.

Executive Guide to Wordstar, Philip E. Massie. Culver City, CA: Culver City Cannon Co. (POB 444), 1982; 24 pages, 23 by 51 cm, softcover, ISBN 0-910517-00-2, $5.75.

Face to File Communication: A Psychological Approach to Information Systems, Bruce Christie. New York: John Wiley & Sons, 1981; 306 pages, 37 by 55 cm, hardcover, ISBN 0-471-27939-0, $35.75.

The Forrest Mims Circuit Scrapbook, Forrest Mims. New York: McGraw-Hill, 1983; 141 pages, 51 by 66 cm, softcover, ISBN 0-07-042389-X, $14.95.

Global Stakes: The Future of High Technology in America, James Botkin, Dan Dimancescu, and Ray Stata, with John McClellan. Cambridge, MA: Ballinger Publishing Co., 1982; 248 pages, 38 by 56 cm, hardcover, ISBN 0-88410-886-4, $17.50.

How to Break into Data Processing, Laura Steibel Sessions. Englewood Cliffs, NJ: Prentice-Hall, 1982; 130 pages, 33 by 48 cm, softcover, ISBN 0-13-402479-6, $6.95.

The Illiac IV: The First Supercomputer, R. Michael Hord. Rockville, MD: Computer Science Press, 1982; 350 pages, 37 by 56 cm, hardcover, ISBN 0-914894-71-4, $29.95.

Introduction to Interactive Computer Graphics, Joan E. Scott. New York: John Wiley & Sons, 1982; 255 pages, 37 by 55 cm, hardcover, ISBN 0-471-05773-8, $25.95.

Introduction to the Z80 Microcomputer, Adi J. Khambata. New York: John Wiley & Sons, 1982; 336 pages, 51 by 66 cm, softcover, ISBN 0-471-86167-7, $11.95.

Kids and the Apple, Edward H. Carlson. Reston, VA: Reston Publishing Co., 1982; 218 pages, 50 by 65 cm, spiral bound, ISBN 0-8359-3669-4, $19.95.

Management Control of Data Processing: Preventing Management-By-Crisis, W. H. Inmon. Englewood Cliffs, NJ: Prentice-Hall, 1983; 326 pages, 43 by 57 cm, hardcover, ISBN 0-13-548123-6, $24.95.

Microcomputer Architecture and Programming, John F. Wakerly. New York: John Wiley & Sons, 1981; 692 pages, 41 by 55 cm, hardcover, ISBN 0-471-05232-9, $32.95.

Microcomputer Graphics and Programming Techniques, Harry Katzan Jr. New York: Van Nostrand Reinhold, 1982; 240 pages, 37 by 55 cm, hardcover, ISBN 0-442-28419-5, $18.95.

Microcomputer Uses in Small Business, John K. Jackson. Kirkland, WA: Datamasters (12700 Northeast 124th St.), 1982; 79 pages, 50 by 65 cm, softcover, ISBN-none, $9.95.

Microprocessor Instruction Sets and Software Principles, David L. Heiserman. Englewood Cliffs, NJ: Prentice-Hall, 1983; 440 pages, 43 by 57 cm, hardcover, ISBN 0-13-581090-6, $29.95.

Personal Microcomputing in the Corporate Environment. Albany, NY: Advanced Management Research Inc., 1982; 35 pages, 51 by 67 cm, softcover, ISBN-none, $35.

Picture This Too! David D. Thornburg. Reading, MA: Addison-Wesley, 1982; 224 pages, 51 by 66 cm, spiral bound, ISBN 0-201-07767-1, $14.95.

Principles of Database Systems, 2nd edition, Jeffrey D. Ullman. Rockville, MD: Computer Science Press, 1982; 484 pages, 37 by 56 cm, hardcover, ISBN 0-914894-36-6, $24.95.

Run: Computer Education, Dennis O. Harper and James H. Stewart. Monterey, CA: Brooks/Cole Publishing Co., 1983; 245 pages, 50 by 66 cm, softcover, ISBN 0-534-01265-5, $15.95.

Software Testing Techniques, Boris Beizer. New York: Van Nostrand Reinhold, 1983; 320 pages, 38 by 55 cm, hardcover, ISBN 0-442-24592-0, $27.50.

Techniques for Creating Golden Delicious Games for the Apple Computer, Howard M. Franklin, Joanne Koltnow, and Leroy Finkel. New York: John Wiley & Sons, 1982; 150 pages, 40.6 by 60 cm, softcover, ISBN 0-471-09083-2, $12.95.

TRS-80 Assembly Language Subroutines, William Barden Jr. Englewood Cliffs, NJ: Prentice-Hall, 1982; 232 pages, 50 by 65 cm, spiral bound, ISBN 0-13-931188-2, $18.95.

Using the Osborne 1 Computer, T. G. Lewis. Reston, VA: Reston Publishing Co., 1983; 211 pages, 37 by 56 cm, hardcover, ISBN 0-8359-8142-8, $19.95.

VIC Innovative Computing, Clifford Ramshaw. Nashville, TN: Melbourne House Software Inc. (347 Redwood Dr.), 1982; 147 pages, 33 by 50 cm, softcover, ISBN-none, $14.95. ■

This is a list of books received at BYTE Publications during this past month. Although the list is not meant to be exhaustive, its purpose is to acquaint BYTE readers with recently published titles in computer science and related fields. We regret that we cannot review or comment on all the books we receive; instead, this list is meant to be a monthly acknowledgment of these books and the publishers who sent them.

www.americanradiohistory.com

Clubs and Newsletters

Ergonomically Speaking

The Ergonomics Newsletter, produced by the Koffler Group, an ergonomics consulting firm, reports on worldwide developments in human-factors engineering. The subscription rate is $126 in North America and $165 elsewhere. Two-year, multiple-copy, and educational discounts are available. For a free sample issue, contact *The Ergonomics Newsletter*, The Koffler Group, 1301 Lachman Lane, Pacific Palisades, CA 90272, or call (213) 459-4429.

Collect The Stack

The Stack is a monthly newsletter produced by the Long Island Computer Association (LICA). Meetings are held on the third Friday of each month at 8 p.m. at the New York Institute of Technology. Anyone interested in computers may attend. The $12 annual membership fee includes a subscription to *The Stack*. For further information, write to LICA, POB 71, Hicksville, NY 11801.

Northwestern Atari Enthusiasts

The Atari Computer Enthusiasts (ACE) of Eugene, Oregon, an independent group not affiliated with Atari Inc., meets on the second Wednesday of each month at 7:30 p.m. The $10 annual membership fee includes the ACE newsletter; overseas subscriptions are $20 a year. Articles contributed to the newsletter are welcome. For more information, contact ACE, 3662 Vine Maple Dr., Eugene, OR 97405.

Compuswap In New Jersey

Compuswap is an APF Users Group that produces a bimonthly newsletter containing updates on software and news about the APF Imagination Machine. The $15 annual membership fee includes a subscription to the group's newsletter. Inquiries may be sent with a self-addressed stamped envelope to Compuswap, POB 1373, West Caldwell, NJ 07006.

News for Video Users

Interactive Video Technology has the latest news on developments and products for interactive video training in medicine, industry, and education. The subscription rate is $45 a year. For further information, write to Heartland Communications, 223 Sunrise Dr., Shreve, OH 44676, or call (216) 567-3732.

Pascal for IBM PC

USUS (UCSD-Pascal System User's Society) has formed an IBM Personal Computer special-interest group to serve as a clearinghouse for information on the implementation, optimization, and use of the Pascal system. Individual memberships in USUS are $20 annually. Membership in the IBM PC group is open to any USUS member. Applications are available from the USUS Secretary, POB 1148, La Jolla, CA 92038.

Syntax Quarterly

Syntax Quarterly, a new publication of the Harvard Group, offers programs, reviews, and products exclusively for Timex/Sinclair computer users. A one-year subscription (4 issues) costs $15. If you also want to subscribe to *Syntax*, a newsletter for Timex/Sinclair users, a combined subscription (4 issues of the quarterly and 12 issues of the newsletter) costs $39. Contact the Harvard Group, RD 2, Box 457, Harvard, MA 01451, or call (617) 456-3661.

Seattle Computer Products Users

The Seattle Computer Products Users Group (SCPUG) promotes the sharing of knowledge among users of 8086/MS-DOS-based systems. The group offers a forum for discussion, system software, and a bulletin board. Membership is $10 a year and includes a newsletter. For further information, contact either Frank Warren, SCPUG, 25190 Cypress Ave. #213, Hayward, CA 94544, (415) 785-7499; or Joseph Boykin, 47-4 Sheridan Dr., Shrewsbury, MA 01545, (617) 845-1074.

Remember RAMS

Memory Pages is the official monthly newsletter of the Rochester Area Microcomputer Society (RAMS). It contains minutes of the meetings, announcements, and a calendar of events. Membership in RAMS runs from October to September. The membership dues are $7.50 or $4 after April; institutional or commercial dues are $20. For more information, write to RAMS, POB 90808, Rochester, NY 14609.

LNW BBS at 1200 bps

The LNW User Group bulletin board system (BBS) has been upgraded to operate with the Hayes Microcomputer Products 1200 Smartmodem. The system works with both 300- and 1200-bps modems. The LNW User Group offers members the 300-bps Smartmodem for $200 and the 1200-bps Smartmodem for $550. For more information, call (516) 924-9229 (voice) or 924-8115 (BBS). A subscription to the group's newsletter is available for $25. For more information, write to the Suffolk County Computer Association, LNW User Group, 244 Mill Rd., Yaphank, NY 11980.

News from the District of Columbia

The Public Service Satellite Consortium produces a monthly newsletter that contains a calendar of events, articles, and conference reports. The newsletter is available to PSSC members and any interested parties. Address inquiries to Michelle Wesley, Suite 907, 1660 L St. NW, Washington, DC 20036, or call (202) 331-1154.■

If you would like BYTE readers to know about your club or newsletter send the details accompanied by no more than one newsletter to Clubs and Newsletters, BYTE Publications, POB 372, Hancock, NH 03449. Overseas groups are encouraged to participate. Please allow at least three months for your announcement to appear.

www.americanradiohistory.com

BYTELINES

News and Speculation about Personal Computing

Conducted by Sol Libes

Random Rumors: Tandy is believed to be readying three new computers for introduction this spring. Two are upgrades of the TRS-80 Model II and Model III (to be called the Model IV and Model 12, respectively) and the third is a portable briefcase system called the M100. The Model IV will have 128K bytes of RAM and an 80-column display. The Model 12 will add expansion slots and a larger power supply to the Model II. Also, look for the battleship-gray cases to be a thing of the past (the color conflicts with office decor). Tandy is expected to finally start shipping its long-awaited multiuser operating system for the Model 16 this month.

DEC (Digital Equipment Corporation) is supposedly working on a Unix operating system for its personal computers. . . . DEC is also hinting about several new 32-bit VAX systems, using a single-chip microprocessor and a four-chip processor set, due for introduction next year. . . . There are rumblings that IBM will soon introduce a 4-inch floppy disk capable of storing 250K bytes. . . . Also, Xerox is expected to finally release Smalltalk-80, and the first implementation will be on the firm's model 1100 Scientific Information system. . . . Digital Research is reportedly planning to release a C compiler. . . . Fortune Systems is believed to be developing a small-scale, low-cost version of its 32:16 machine using the new Motorola 68008 microprocessor (which requires only an 8-bit-wide data path, similar to Intel's 8088). . . . Texas Instruments (TI) is expected to introduce a new version of the 99/4 with 64K bytes of memory and a CP/M option, to compete with the Commodore 64. TI is also expected to shortly announce a portable compact computer. . . . It is rumored that Sperry Univac and Mitsubishi are negotiating a private-label deal for a CP/M-based system.

Mattel Computer: Mattel Electronics introduced the Aquarius computer at the January Consumer Electronics Show. With a Z80A processor and 4K bytes of RAM in the basic version for under $200, the machine can be expanded with a variety of peripherals. Memory cartridges can increase RAM to 52K bytes, and two expansion modules offer the options of dual disk drives and game controllers. What's more, with the disk-drive addition, the system will run CP/M 3.0. . . . **P. C.**

S-100 Bus Standard Adopted: The IEEE has finally adopted the S-100/IEEE-696 bus standard for microcomputer systems. This standard, which has been in the works for over three years (typical development time for an IEEE standard) and required the approval of four separate committees, is an important one because the S-100 bus is the most popular bus system used by microcomputer manufacturers. Currently close to 150 manufacturers make a total of over 500 different plug-in boards for S-100 systems. Hence, the standard will ensure a high degree of compatibility among different manufacturers' products.

Even more important, the standard provides for implementing future changes in the state of the art in microcomputer systems. The standard allows up to 16 megabytes of direct memory addressing, up to 64K I/O ports, up to 10 vectored interrupts, up to 16 masters, with a mix of up to 22 masters and slaves (including a front-panel option), and the flexibility of configuring a system any way the user wishes. Manufacturers have already introduced S-100 processor cards for half a dozen different 8-bit microprocessors (Intel's 8080 and 8085, Zilog's Z80, MOS Technology's 6502, and Motorola's 6800 and 6809) and seven different 16-bit microprocessors (TI's 9900, DEC's LSI-11, Intel's 8086 and 8088, Zilog's Z8000, Motorola's 68000, and National Semiconductor's 16032). More processor cards are expected.

The S-100 manufacturers lead the industry in implementing new technical developments. They were the first to introduce to the personal computer marketplace 16-bit systems; the CP/M, MS-DOS, OASIS, and Turbo-Dos operating systems; floppy-disk systems; hard-disk systems; virtual-disk systems; cache-memory systems; multiprocessing; and multiuser systems. In all probability they will continue to lead in the introduction of state-of-the-art features.

Credit for the development of the S-100/IEEE-696 bus standard goes to George Morrow of Morrow Designs and Kels Elmquist of Ithaca Intersystems for drafting the original standard, and to Mark Garetz of Compupro who finalized the standard and piloted it through the committees to final adoption. It is expected that the standard will be published in a final form by the IEEE. To find out about receiving a copy, send a stamped, self-addressed, business-size envelope to Mark Garetz, Compupro, Box 2355, Oakland Airport, CA 94614.

Visicorp's Visi On: Way back in 1981, Xerox demonstrated its Star personal workstation computer system at the National Computer Conference (NCC). The system featured a startling new operating system designed for neophyte computer users and displayed a menu of graphic images, called icons, depicting objects normally found in the office: file cabinets, file folders, a printer, etc., all on a page-format, bit-mapped video display. The cursor was controlled with a thing called a mouse, which the user could roll around on the desk to allow motion between menus and items in the menus. For example, it allowed the user to very easily "cut and paste" together text. The system effectively limited the keyboard to the minor role of text entry. The Star heralded the new generation of user-friendly computers; the only hitch was that the cost was "out of sight," and Xerox has

www.americanradiohistory.com

yet to go into production on the system.

Several companies showed similar products at last year's NCC. Although lower in cost than the Xerox system, they too had prices that limited their acceptance. And Apple has introduced such an operating system on its new 68000-based Lisa.

Now comes word that Visicorp will release this summer a software package for the IBM Personal Computer (others to follow) that provides many of these features. Called Visi On, it provides "windows" in which text and other files can be viewed, moved, and shuffled around using a two-button mouse cursor controller (interfaced via an RS-232C serial port). The software is written largely in C and is designed to be machine- and operating-system independent. A minimal system on the IBM Personal Computer will require 128K bytes of memory (more memory is desirable; 512K bytes is recommended when using concurrent CP/M). Visicorp is also said to be readying communications and networking software.

If Visi On will indeed provide these promised features it could have a serious impact on Apple's new 16-bit systems, which are expected to provide similar features (some of Apple's key designers worked on the Xerox Star) and be much more expensive.

IBM Doings: There is a rumor afloat that IBM will leave both Digital Research and Microsoft out in the cold. It is suggested that, having just introduced Unix for the firm's Series/1 minicomputers, IBM will go for complete product-line compatibility by eventually offering Unix (not Xenix) for the Personal Computer, dropping CP/M-86 and PC-DOS (MS-DOS) entirely. . . . M. H.

In an act reminiscent of Apple Computer, IBM has notified its dealers that it will not condone reselling of its systems to unauthorized dealers. However, it has not gone as far as Apple did in threatening to terminate such dealers. Further, IBM has curtailed production of machines with only 16K bytes of memory to prevent unauthorized resellers from purchasing units for expansion with non-IBM memory and disk drives.

IBM now has about 500 dealers (including 300 Computerland dealers) and is expanding its dealer network rapidly, leading to intense competition in some areas. For example, in southern California, an area noted for hefty discounting, one dealer has advertised a price of $2405 on an IBM Personal Computer system listing for $3085—more than a 20% discount. Furthermore, several IBM Product Centers have offered special promotions that have included 10% discounts and other inducements. Also, IBM has instituted a 22% discount program for school purchases.

IBM is expected to finally introduce its hard-disk option for the Personal Computer next month or the month after. It is expected to use the Seagate 5¼-inch drive and Xebec controller, and will provide from 10 to 60 megabytes of storage.

Matsushita has signed a contract to manufacture computers for IBM that will be sold by IBM Japan Ltd. The first systems are expected to go on the market this spring with prices ranging from $4000 to $6000. Colby Computer of Palo Alto, California, has introduced a kit to convert an IBM Personal Computer into a 26-pound portable computer. Just remove the IBM motherboard and disk drive from IBM's box and install it in the Colby PC-1 box, which also contains a 9-inch video monitor.

IBM and Carnegie-Mellon University have entered into an agreement to develop a microcomputer network (with 7500 workstations) over a three-year period. The project will involve the development of a 32-bit machine with 1 megabyte of memory and a high-resolution bit-mapped graphics screen and tablet. Initially, the network will use 1000 of the new IBM 68000-based microcomputers, with the 32-bit machines being added as they are developed. Students will be expected to either lease or purchase the systems.

Apple News: Much to the surprise of industry experts, Apple Computer Inc. showed a very strong income increase for the last quarter of last year, ending September 24. Income increased 71% to almost $19 million and sales jumped 80% to almost $176 million. Considering the age of the Apple II, the friction between Apple and its dealers, and the competition from IBM, analysts expected stunted growth. Instead Apple shipped over 300,000 systems in the past year, about twice the number of IBM Personal Computers (IBM's revenues are believed to be greater, however). Experts now expect that Apple's sales growth will continue to be strong into the beginning of this year. It's also interesting to note that Apple is in the process of increasing its work force from 3500 to 4900 employees, apparently betting on the acceptance of the new Lisa, Mackintosh, and lower-cost Apple II systems.

Although Apple's market share decreased, the overall growth of the market has resulted in increased sales for Apple. Apple has decided to become aggressive in its campaign to halt transshipping of machines from authorized dealers to unauthorized discounters. It has hired a Phoenix-based law firm to track the origins of transshipped computers and is promising to take action against dealers it suspects have violated their agreement. Apple claims to have cut off a few dealers already for this reason.

Steve Wozniak, a cofounder of Apple Computer Inc., has joined forces with Digital Research to develop a new product for the Apple II. It is an add-on card that will allow the Apple II to run CP/M-Plus (also known as CP/M version 3) and support the new emerging GSX-80 graphics standard. The board will be produced and marketed by ALS (Advanced Logic Systems) of Sunnyvale, California.

CP/M-Plus Introduced: Digital Research Inc. has finally released its new version of CP/M for 8-bit machines. Digital Research calls it CP/M-Plus, but most computer experimenters will probably refer to it as CP/M version 3.0. Certainly it is a major upgrade of CP/M, offering many new features and performance enhancements. Most particularly it takes advantage of the fact that 8-bit systems are going beyond the traditional 64K-byte memory bounds. CP/M-Plus is designed for systems with banked memory where the size of the DOS (disk operating system) is no longer a problem. The memory space for programs now can be as great as 62K bytes, with additional buffers for I/O. Thus we can ex-

www.americanradiohistory.com

pect to see 8-bit CP/M-Plus systems, typically with 256K bytes of memory and high-speed performance, particularly for hard-disk systems.

CP/M-Plus also offers such features as I/O redirection (in the manner of Unix), date and time stamping, file passwords, a command-line editor, and a Help command. Maximum total floppy-disk drive capacity is now up to 512 megabytes and file size is now up to 32 megabytes maximum. Another big improvement is the documentation. Previous CP/M documentation was written for very advanced programmers. The new documentation is much more down-to-earth and more professionally produced. There are 26 new BDOS (basic disk operating system) functions and 16 new BIOS (basic input/output system) functions. Most CP/M version 2.2 application programs should run under CP/M-Plus with no change; however, some problems can be expected with certain debugging and disk utilities.

We now await the new version of MS-DOS from Microsoft to see its enhancements. In any case, CP/M-Plus will no doubt add new life to the 8-bit microcomputer world, and 8-bit machines will continue to compete strongly with the emerging 16-bit machines. Now if Digital Research would just add concurrency (multitasking) to CP/M-80, the company would have a very attractive product!

New 32-Bit Desktop System: Hewlett-Packard (HP) is the first company to announce a 32-bit desktop computer system. Called the 9800, it will employ HP's own 32-bit microprocessor chip set and will provide a claimed performance equivalent to IBM's 370/150. Prices will start at $28,000. Shipments are expected to start in this quarter. The machine is expected to be oriented to the scientific and engineering markets.

HP appears to have scored a coup over competitors in the 32-bit field. AT & T (American Telephone and Telegraph) is expected to introduce a 32-bit system later this year, and Intel is expected to introduce a new 32-bit microprocessor that is suitable for desktop computer use.

Portable Market Accelerates: Adam Osborne in effect created the portable computer market with his Osborne 1 computer. In 1981, his first year of business, he claimed to have done $10 million worth of business. Last year he claimed $100 million, and he is shooting for $1 billion by the mid-1980s. Several competitors have entered the market with machines that are either lower in price or have better features, or both.

The portable-computer market presently appears to be the fastest-growing segment of the personal computer market. Apple Computer Inc. is known to be working on a portable system, as are Tandy, IBM, DEC, and several Japanese companies. Systems from over a dozen manufacturers are expected to be out by year-end. One Japanese portable is already being marketed in Japan. The Japanese firms are expected to be very strong in the portable-computer arena because of their advantage in display technology.

The next big innovation in portable computers is expected to be the new 3-inch floppy-disks and hard-disk drives for mass storage. Although some people question the reliability of a Winchester hard-disk drive in a portable system, such units are expected shortly.

How Are They All Doing? According to a report generated by Portia Isaacson and Egil Juliussen of Future Computing Inc. (a market-research firm), the microcomputer system with the largest base of customers by the end of 1982 was the Commodore VIC-20, with about 750,000 systems sold. Second and third were the Apple II and Timex/Sinclair 1000, both with about 600,000 systems, followed closely by the Texas Instruments TI-99/4A, with about 575,000 systems. The report says that, during 1982, the VIC-20, Timex/Sinclair 1000, and TI-99/4A overtook the Apple II by selling at a rate of at least three to one. This is accounted for by the fact that the VIC-20 and TI-99/4A are being sold by over 8000 mass-merchandising stores such as K-Mart and Toys-R-Us, while the Apple II is sold only through 1000 computer stores.

AT & T Offers to Support Unix: In a surprise move, AT & T has announced that it will provide support for Unix to source-code licensees. Binary licensees (end users) must get support from Unix vendors. The support will include telephone hotlines for troubleshooting, technical consultants, seminars, newsletters, electronic mail reports of problems, and periodic releases of updates.

AT & T has also released Unix System V, an upgrade from the System III. It provides enhanced screen editing, text processing, file-system maintenance, and communications. Further, it has "tighter" code (meaning it is a more concise and streamlined program) and is claimed to operate more efficiently.

Some commercial users of Unix are complaining that they have only just finished transporting System III to their machines (System III was announced only a year ago), and now they will have to spend more development time on System V. Complaints have also been heard regarding the Unix standard, based on System III, which has nearly been completed and now will have to go back for reworking.

Western Electric has opened what is considered the world's largest software development facility in Lisle, Illinois. The firm plans to have 1700 people there shortly, with 2400 expected eventually. Industry experts feel that this is a prelude to a future AT & T assault into the general-computer marketplace via a thrust into the software business. AT & T is rumored to be readying a computer using the Bellmac-32 32-bit microprocessor for introduction next year.

IBM has introduced Unix for its Series/1 minicomputers, and the firm is expected to also make it available for the 4300 mainframe series. IBM is reportedly readying a 32-bit version of the Series/1 for introduction this year.

In an interesting sidelight, Tandy Corporation has asked the Justice Department to forbid AT & T's using the Bell name when that firm goes into the computer and other businesses. They contend that the new logo and name, American Bell, is just not enough of a departure and that the use of the name "Bell" will give AT & T too much of an advantage.

Micro-Floppy Makers vie for a Standard: It's chaos in micro-floppy land, with manufacturers trying to

www.americanradiohistory.com

make 3-inch, 3¼-inch, 3½-inch, and 4-inch floppy disks the standard, and so far no one is succeeding. Recently, Shugart Associates introduced its 3½-inch drive. However, Micro Peripherals Inc., which had previously endorsed the 3½-inch drive, has switched to the Hitachi 3-inch drive. Then there's the 3¼-inch drive being pushed by Seagate Technology, Tabor Corp., and Dysan Inc. Also, IBM is believed to be working on a 4-inch drive. In the meantime, Tandon (one of the prime factors in the floppy marketplace), along with Verbatim, has decided to go with the Sony 3½-inch drive. . . . A. L.

Whatever size becomes standard for micro-floppies might also become a standard size for micro-hard disks. One company, Syquest, has already introduced a 3.9-inch hard-disk drive with removable media.

Local-Area Network Market Developing: Nestar and Corvus have pioneered the low-cost microcomputer LAN (local-area network) market. Recently they were joined by 3Com, and a battle is shaping up for market share. Although the early versions of these systems were slow, newer upgrades are providing much higher performance. Nestar and 3Com provide sophisticated networking software for their systems while Corvus supports a wide variety of different personal computers on its system.

Companies such as DEC and HP appear to be going with the more expensive Ethernet system. In the meantime, close to two years of wrangling have gone on in the IEEE LAN standard committee; manufacturers fail to agree on an industry LAN standard, and about two dozen different systems have been introduced. This may lead to chaos in the LAN marketplace. IBM is expected to introduce soon yet another system, which because of IBM's position in the computer market may become the de facto standard.

Battle in the Classroom: People tend to get hooked on the first computer they are trained on. Hence, Apple, Tandy, IBM, TI, and Atari all want to get their machines into schools so that students will influence their parents to buy systems, and later the graduates will purchase their own systems.

So far Apple seems to be winning the battle of the classroom: thousands of Apple II systems are installed, and a federal bill may be passed to allow companies to write off twice the manufacturing cost of computers they donate to primary and secondary schools. The bill has already passed the House of Representatives.

IBM has moved into the fray with a 22% discount to accredited schools and colleges on its basic Personal Computer system. Further, as I mentioned earlier, IBM has entered into a development project with Carnegie-Mellon University that is expected to have far-reaching impact in the educational world. Carnegie-Mellon is also negotiating with Warner Communications (Atari's parent company) to make the Carnegie-Mellon/IBM systems available to homes via cable television.

Commodore and Tandy offer special deals to schools and have also been successful in installing a large number of computers in schools. DEC has just signed a contract with Rochester Institute of Technology to sell DEC personal computers to RIT students, faculty, and staff at about a 40% discount (does it pay to enroll as a student to buy a system?).

Virtual Disk Systems: The continuing decrease in memory cost has led to the introduction of disk-emulator systems that substantially speed up system performance. In applications such as database systems and sorting that make a large number of disk accesses, the ultimate speed of the system is determined by the access time of the disk rather than the processor used. Thus a system that allows disk files, buffer files, and temporary intermediate files to be stored in solid-state memory speeds up program execution sometimes by as much as 100 times. The only disadvantage is that if power is shut down before the data is transferred from the virtual disk in memory to the actual disk, data will be lost.

There are at least five manufacturers of such systems, including Semidisk Systems, Beaverton, Oregon; Magnolia Microsystems, Seattle, Washington; GG Engineering, San Leandro, California; Axlon, Sunnyvale, California; and Macrotech International, Canoga Park, California.

Top Three Operating Systems: The UCSD p-System, from Softech Microsystems, now appears to rank third in the popularity contest for single-user microcomputer operating systems. CP/M still ranks first, and is still far out in front. Second is MS-DOS from Microsoft. Although, it's doubtful that the p-System will move up a notch in the race, it is interesting to note that the system is already available on DEC, HP, Osborne, TI, Phillips, Zenith, Commodore, Sage, Nixdorf, and Victor computers.

Robots with a Sense of Touch: MIT (Massachusetts Institute of Technology) reports that a research program has developed a much-improved tactile sensing system for robots that provides a very human-like sense of touch. The new sensor system is intended to be used as part of a tendon-actuated mechanical finger that operates much like a human finger. The device is made up of 256 tactile sensors that fit on the tip of a finger.

The Artificial Intelligence Laboratory at MIT is developing tactile recognition programs that allow the sensor to determine the general shape of an object it is touching, if it has any bumps or depressions, and if the object can be rolled. Research is also expected in the area of texture recognition and construction of a touch picture of an object as the sensor is moved across the object.

Retailers Complain About Low Profits: It is estimated that there are now over 2500 computer stores in the U.S. doing about $2.5 billion in sales. However, the proliferation of stores and the poor economy are leading to competition and discounting that are combining to hurt independent computer retailers. Many microcomputer stores were started in garages and basements a few years ago by hobbyists who hoped to profit from their passions. Now a number of these stores are finding themselves undercapitalized, trapped in the complexities of retailing, and squeezed

www.americanradiohistory.com

between low manufacturer discounts and high mail-order dealer discounts. More computers are now sold through mass merchandisers than through computer stores. As a result, several hundred of these pioneering computer stores closed last year, and more are expected to close this year.

Las Vegas Show: Several new computers were introduced at the winter Consumer Electronics Show (CES) in Las Vegas. Commodore made a splash with a portable version of the 64, offering a built-in color display and two drives for $1595. Another entry was the firm's hand-held computer with 4K bytes, expandable to 16K bytes. This same machine is being manufactured by Toshiba. . . .TI introduced the 99/2, designed to go head-to-head with the Timex/Sinclair 1000, with a $99.95 price tag. Also on display was the Compact Computer 40, a battery-operated system with 6K bytes of RAM and an optional four-color printer/plotter.

Spectra Video drew much attention with its SV 318 computer, a 32K-byte ROM, 32K-byte RAM system (expandable to 96K bytes of ROM and 144K bytes of RAM), with a base price of $299. A wide range of peripherals are available, and the system is compatible with CP/M 3.0. Perhaps its most distinguishing physical characteristic is the joystick on the keyboard panel. Entex is offering the 2000 Piggyback Computer, a keyboard for the Atari 2600 including 8K bytes of BASIC and 3K bytes of RAM, for $95. The Timex/Sinclair 2000 (the American version of England's Spectrum computer) was announced at the show, and a $15 rebate was offered on the Timex/Sinclair 1000. . . . **P. C.**

More Imports from Japan: The Commerce Department reports that IC (integrated circuit) imports from Japan for the first 9 months of last year doubled in dollar volume, while U.S. IC exports to Japan rose 27%, causing a trade deficit of $227 million. The Japanese now have 7% of the total U.S. IC market. Consumption of ICs in Japan last year rose 15%, while in the U.S. IC makers were laying off employees and operating at 70% of capacity—all at a time when tariffs between the U.S. and Japan were equalized.

OSI Division Sold: Ohio Scientific Inc., one of the earliest personal-computer makers (begun in 1975 and later bought out by M/A-COM Inc.), has reportedly been sold to Kendata Inc. of Stamford, Connecticut. OSI has been in financial difficulties for several years and reportedly had a substantial loss in 1982. Kendata, founded only last year, sells and leases small-business computers (e.g., Victor, Altos, and North Star) and has 22 employees (versus 200 at OSI). OSI reportedly has sold 38,000 systems and has 400 dealers.

Random News Bits: CBS is reported preparing to open its first computer store in Berkeley, California, with the hope of eventually establishing a chain of stores. . . . Non-Linear Systems, Solana Beach, California, reports that it is now shipping 10,000 Kaypro II portable computers each month. . . . Quantum Science Corporation, a New York research firm, estimates that the Japanese currently have a 1.7% share of the U.S. small-business computer market (estimated at $7.9 million), and the firm expects this to increase to about 3.5% by 1986. . . . Syquest Technology has lined up a second source for its 3.9-inch Winchester drive, which puts the company in a prime position as a hard-disk supplier for portable computers. . . . Centronics Data Computer Corporation has quietly dropped its plans to produce the Quietwriter printer which was announced with great fanfare two years ago. . . . Drivetec, Palo Alto, California, has introduced a 5¼-inch floppy-disk drive storing 3.3 megabytes. It is half-height and has a track density of 192 tracks per inch. . . . Intel has introduced the 7114 4-megabit bubble-memory device that it expects to start sampling by early summer. . . . The French government now levies a fine on suppliers who use Anglicized jargon in program and computer documentation. . . . ADAPSO (Association of Data Processing Service Organizations) has finally recognized the microcomputer and established a Microcomputer Software Association. . . . Atari has announced the Atari 1200XL Home Computer System for introduction this summer. Look for it to be a direct competitor for the Commodore 64 and the new Apple IIe.■

MAIL: I receive a large number of letters each month as a result of this column. If you write to me and wish a response, please include a self-addressed, stamped envelope.

Sol Libes
c/o BYTE Publications
POB 372
Hancock, NH 03449■

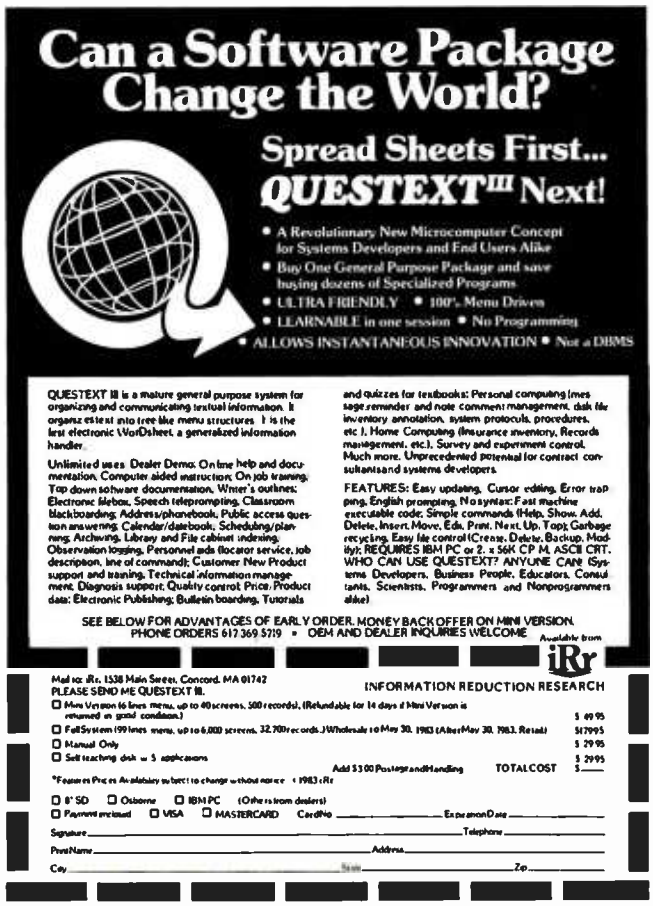

Circle 504 on Inquiry card.
www.americanradiohistory.com

What's New?

MASS STORAGE

Streaming Tape Cartridge for Winchester Backup

The Slider from Data Electronics is a ¼-inch digital cartridge tape drive designed to match the backup requirements of current 5¼-inch Winchester disk systems. The Slider features streaming operation with 10 megabytes of storage, a read/write head with write drivers and read preamplifiers, and interface logic with motion control and status reporting. It uses an ANSI-standard 450-foot magnetic-tape cartridge and incorporates GCR (group code recording). The Slider has a recording density of up to 10,000 flux changes per inch.

The Slider is available in a variety of packages: open frame, slide mounted, and desktop in multiple mounting configurations. In OEM (original equipment manufacturer) quantities, the Slider costs less than $500. For purchasing and ordering information, contact Data Electronics Inc., 10150 Sorrento Valley Rd., San Diego, CA 92121, (619) 452-7840.

Circle 550 on inquiry card.

Hard-Disk System for Apples and IBM PC

The Hobbyist is a 5¼-inch hard-disk drive designed to work with the Apple II and III and the IBM Personal Computer. Produced by Santa Clara Systems, this drive includes 5 megabytes of storage capacity, a controller, host adapter, operating software, cable, and cabinet. The Hobbyist costs $1995. Contact Santa Clara Systems Inc., 560 Division St., Campbell, CA 95008, (408) 374-6972.



Circle 551 on inquiry card.

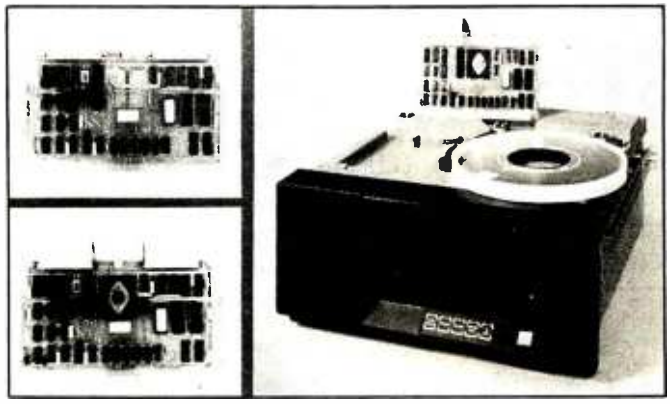

Intelligent Controllers Interface to Popular Buses

A family of intelligent controllers that hook IBM-compatible 9-track formatted tape drives to a variety of popular computer buses has been introduced by Alloy Engineering Company. The ITS family of 8085-based controllers links such drives as the Cipher Microstreamer to S-100, SS-50, and Radio Shack TRS-80 buses. These controllers feature software-selectable ASCII-to-EBCDIC (extended binary-coded decimal interchange code) conversion in firmware. Software is supported under the following operating systems: CP/M, MP/M, DPC/OS, OS-9, and TRSDOS.

In OEM (original equipment manufacturer) quantities, the ITS family costs $650 per unit. For more information, contact Alloy Engineering Co. Inc., Computer Products Division, 12 Mercer Rd., Natick, MA 01760, (617) 655-3900.

Circle 552 on inquiry card.

Microfloppies for HP Computers

Hewlett-Packard is marketing a family of 3½-inch mass-storage systems for its personal, business, and technical computers. Each microfloppy system uses a 3½-inch Sony drive and HP electronics. Presently, the firm has three packages available: a single-drive 270K-byte system, a 540K-byte dual-drive model, and a 4.6-megabyte Winchester disk coupled with a single 3½-inch microfloppy. The 3½-inch disk drive transfers 17,800 bytes of information per second. The disk, which can record 135 tracks of data per inch, is wrapped in a hard polymer housing. The drive has a sliding cover for the read/write opening, which protects against contamination from dust and dirt.

The 3½-inch drive systems are compatible with HP Series 80, 100, and 200 personal computers and

www.americanradiohistory.com

the HP 1000 desktop computer family. Prices range from $1200 to $4975. The 3½-inch media cost $59 per box of 10. Full details are available from your local Hewlett-Packard sales office.
Circle 553 on inquiry card.

Elite Drives for Apples

The Elite line of 5¼-inch floppy-disk drives from Rana Systems are Apple-compatible. Standard features include storage capacities of up to 625K bytes, the ability to work with Apple's and Rana Systems' controller cards, and DOS 3.3, Pascal 1.1, and CP/M compatibility. The Elite controller card lets you hook any combination of four Apple or Rana Systems drives to the Apple II, and it automatically boots 13- and 16-sector disks.

The Elite One, a single-sided, 40-track drive providing 163K bytes of storage, costs $379. A double-sided, 40-track drive with 326K bytes of storage, the Elite Two is $649. The Elite Three is a double-sided, 80-track drive priced at $849. Each Elite drive comes with a user manual and an enhancer disk. Optionally, they can be purchased with the controller card for $519, $749, and $949, respectively. The controller card alone is $145. For further details, contact Rana Systems, 20620 South Leapwood Ave., Carson, CA 90746, (800) 421-2207; in California, call (800) 262-1221 or (213) 538-2353.
Circle 554 on inquiry card.

COMDEX REPORT

Big Screen for IBM Personal Computer

Quadscreen, a 17-inch monitor for the IBM Personal Computer from Quadram Corporation, was on display at the Fall Comdex in Las Vegas. Capable of displaying 10,240 characters simultaneously, this P4 phosphor high-resolution monochrome screen can use a 5 by 7 character matrix to achieve a 160-character by 64-line display. A split-screen feature gives you side-by-side 80-character by 64-line screens, and a bit-mapped graphics mode permits an addressable resolution of 960 horizontal by 512 vertical. Screen attributes include reverse video and forward and backward scroll. Built-in, user-definable character sets and driver firmware in read-only memory are standard. Quadscreen has full IBM PC-DOS/BIOS compatibility.

An optional P39 green-phosphor screen is available for Quadscreen. Priced at $1950, Quadscreen comes with a cable, software, and a controller that uses only one slot on the Personal Computer. For information, contact Quadram Corp., 4357 Park Dr., Norcross, GA 30093, (404) 923-6666.
Circle 555 on inquiry card.

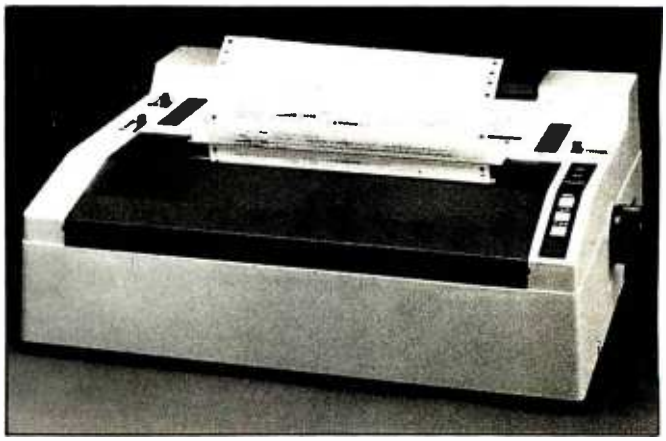

Printer Features Variable-Speed Operation

The 8600 dot-matrix impact printer with variable-speed operation and an 18-wire print head was introduced at Comdex by C. Itoh Electronics Inc. This printer features task-dominant print speeds of 180 cps (characters per second) for data and list processing, 90 cps for high-resolution graphics, and 60 cps for near letter-quality output. Using a 9 by 9 matrix, the 8600 offers an 80-character-per-line format, built-in graphics mode, a 2K-byte buffer (expandable in 2K-byte increments) that reduces the central processor overhead, and parallel and serial interfacing with X/ON and X/OFF protocol. Paper feed is either bi-directional roll or optional tractor feed. The platen distance is adjustable for a variety of form thicknesses. Automatic vertical and horizontal tabbing and variable forms-length selection with electronic vertical formatting are standard. Print features include proportional spacing, eight character sizes, the ability to mix fonts during single line passes, and eight user-selectable alphabets, ranging from English to Japanese.

The 8600 dot-matrix printer costs approximately $1400. Quantity discounts are offered. Purchasing and technical details are available from C. Itoh Electronics Inc., 5301 Beethoven St., Los Angeles, CA 90066, (213) 306-6700.
Circle 556 on inquiry card.

Irma Links IBM PC to 3270 Controllers

Technical Analysis Corporation's Irma, the first interface for direct native-mode coaxial cable attachment of IBM Personal Computers to IBM 3270 controllers, was announced at Comdex. Irma is a printed-circuit board that fits into any available slot in the PC. It is attached by coaxial cable to most IBM 3270 controllers and emulates an IBM 3278 display. It operates in native 3278 mode and requires no additional telephone lines, modems, or com-

www.americanradiohistory.com

munications front-end support for local or remote environments. Standard features include an internal 1920-character screen buffer, emulation of 3270 monochrome and color character displays of up to 80 characters by 24 lines, a set of subroutines for selective transfer of data from emulated 3278 screens, and onboard diagnostics. In addition, Irma provides complete IBM 3278-2 terminal function compatibility and the ability to save full screens of mainframe data on floppy disk or on hard copy.

Irma works with any IBM 3274, 3276, or integral terminal controller that uses Type A terminal adapters. It lists for $1195; quantity discounts are available. For full details, contact Technical Analysis Corp., 120 West Wieuca Rd. NE, Atlanta, GA 30042, (800) 241-4762; in Georgia, (404) 252-1045.
Circle 557 on inquiry card.

Local Network Unveiled at Comdex

At Comdex, Vector Graphic introduced LINC (local interactive network communications), a local-area network scheme that uses telephone wire to connect up to 15 single-user Vector 4 microcomputers. LINC is described as a high-speed token-passing network that uses a distributed control technique which eliminates the need for a dedicated master station or a file server. All members of a LINC network can share large disk files, high-speed printers, communications facilities, and an electronic mail service. Each workstation will support an individual printer and can function as a stand-alone word or data processor while connected to the network. LINC uses SDLC (synchronous data-link control) protocol technology. The data rate is 750,000 bits per second using RS-422A transmission standards. Network software resembles that of a multiuser operating system, and the workstations can run CP/M- and MP/M-type applications programs.

Complementing the LINC network is the Vector 4 Intelligent Workstation. This workstation, a full-function microcomputer without local disk storage, is ready to plug onto the network. Priced at $3750, it comes with a built-in controller board containing an amplifier that maintains signal strength over long distances.

The Vector 4 comes in two other configurations: the Vector 4/20 has two 630K-byte 5¼-inch floppy-disk drives; the Vector 4/30 carries a single floppy disk and a 5¼-inch 5-megabyte Winchester disk drive. A LINC upgrade kit is available for either the 4/20 or 4/30 for $750, including network software. For complete details, contact Vector Graphic Inc., 500 North Ventu Park Rd., Thousand Oaks, CA 91320, (805) 499-5831.
Circle 558 on inquiry card.

Portable Peripheral for Communications

Axlon demonstrated its Datalink Series 1000 portable personal communications terminal at Comdex. Datalink measures 1⅞ by 3⁹⁄₁₆ by 6¾ inches and weighs less than a pound. Designed for a variety of markets, this terminal can be used to transmit or retrieve information from a personal telephone directory or a database such as the New York Stock Exchange. Dataline has a 16-character tilted green-fluorescent display, keyboard-selectable 110- or 300-bit-per-second character speeds, a built-in RS-232C-compatible output port, and an alphanumeric typewriter keyboard. Rechargeable batteries and a built-in direct-connect telephone modem are standard.

Datalink options include acoustic cups, a 40-character-per-line printer, and a television display interface with 2K bytes of memory. It costs $399 and is available from Axlon Inc., 70 Daggett Dr., San Jose, CA 95134, (408) 945-0500.
Circle 559 on inquiry card.

Personal Computer Network System

The PLAN 4000 system from Nestar Systems will simultaneously support the IBM PC and Apple II and III computers in a vendor-independent network. This system was designed for users requiring dedicated and accessible computing power with full communications capabilities for sharing and accessing information. PLAN 4000 is built around Datapoint Corporation's ARCnet and Xerox's Ethernet technologies, and it supports up to 548 megabytes of disk stroage for each file server online. The file server manages access to storage for all users connected to the network, and multiple file servers can be added. Functions possible with PLAN 4000 include automatic printing with a variety of printers, local and worldwide electronic mail communications, direct user access to IBM mainframes, Telex

www.americanradiohistory.com

communications from individual workstations, and bridges to other networks.

Workstations attach to PLAN 4000 by means of a plug-in network interface card, which is $595. A 40-station network costs approximately $1800 per workstation, which includes support for up to 137 megabytes of disk storage and 45 megabytes of digital cartridge tape backup, a print server, an IBM 3270 server, and electronic mail capabilities. A number of network configurations can be arranged. For complete specifications and purchasing information, contact Nestar Systems Inc., 2585 East Bayshore Rd., Palo Alto, CA 94303, (415) 493-2223.

Circle 560 on inquiry card.

Half-Height Winchester Uses Thin-Film Disks

Seagate Technology unveiled a half-height 5¼-inch micro Winchester disk drive at the Fall Comdex. The ST206 drive uses ferrite read/write heads for higher frequency response and a flux density of 9074 fcpi (flux changes per inch). Its thin-film plated media are capable of storing 6.38 megabytes of unformatted data or 5 megabytes of formatted data. Fully compatible with the industry-standard ST506 interface, the ST206 was designed to be a companion to half-height floppy-disk drives in single-slot intelligent terminals and portable computers. Technical specifications include a 5-megabit-per-second transfer rate, average access time of 85 milliseconds (including settling) using a split-band positioner and a stepper-motor-driven actuator, a stored-data density of 10,416 bytes per track (unformatted), and 9.33-millisecond average latency. Dimensions for the ST206 are 1.625 by 5.75 by 8 inches.

In 500-unit lots, the ST206 costs $745. Seagate Technology is located at 360 El Pueblo Rd., Scotts Valley, CA 95066, (408) 438-6550.

Circle 561 on inquiry card.

Serial Dot-Matrix Printers

Okidata introduced two serial dot-matrix printers at Comdex. The Microline Models 92 and 93 provide correspondence-quality printing and data-processing capabilities. Both models give you bidirectional data processing with short-line seeking logic at 160 cps (characters per second) and high-resolution correspondence-quality printing at 40 cps. These printers have enhanced and emphasized printing, dot-addressable graphics, down-line-loadable character sets that allow you to create custom characters and symbols, and a 9-pin stored-energy printhead. User forms controls for vertical tab, top of form, and up to 10 forms lengths are provided through switch and program control. The mean time between failures is 4000 hours, and the mean time to repair is 15 minutes. These printers come with a Centronics-compatible parallel interface. A high-performance RS-232C serial interface is available optionally.

The Model 92's maximum column width is 136 characters at 17 cpi (characters per inch). It has a standard roller platen to accommodate friction and pin paper feeds. A tractor feed is optional. The Model 93 has a roller platen and tractor feed for forms up to 16 inches wide. Contact Okidata Corp., 111 Gaither Dr., Mount Laurel, NJ 08054, (800) 654-3282; in New Jersey, (609) 235-2600.

Circle 562 on inquiry card.

Bisynchronous Communications Interface

North Star Computers is marketing a software package that provides a 2780/3780 bisynchronous communications link between Advantage and Horizon microcomputers and large mainframes. With the Northlink 2780/3780 Bisync, North

www.americanradiohistory.com

What's New?

Star systems can transmit batched files between their equipment and computers from such manufacturers as IBM, Hewlett-Packard, and Data General. Northlink can provide the same service when it is used as a gateway on North Star's local-area network, Northnet.

The Northlink 2780/3780 Bisync costs $499. Contact North Star Computers Inc., 14440 Catalina St., San Leandro, CA 94577.

Circle 563 on inquiry card.

SOFTWARE

Hayden Software Products

The Hayden Software Company markets business, entertainment, professional, and utility software packages. Designed for small businesses with CP/M-based systems, the Basic Accounting System provides general ledger, accounts payable and receivable, payroll, and inventory program modules. For the home, Hayden offers arcade-type games such as Bulldog Pinball, an Atari version of the popular pinball game. The PIE Writer word processor for the IBM Personal Computer and Apple IIs equipped with an 80-column board is available. Hayden also distributes a shape-drawing program and a communications system for use with the Apple II and Hayes Micromodem II. For information, contact Hayden Software Co., 600 Suffolk St., Lowell, MA 01853, (617) 937-0200.

Circle 564 on inquiry card.

Sophisticated Word Processor

The Gutenberg Word and Print Processing Program for the Apple II is a user-friendly word processor suitable for text creation and secretarial tasks. It offers a split-screen text editor, user-definable screen and printer characters for multilanguage documents, and automatic centering of up to 32 user-definable foreign accent marks. Gutenberg has an unlimited variety of such formats as multiple columns, shaped text, complex tabulations, and multiple levels of indentation. Standard features include global search and replace with eight different masks and counter, programmable keyboard abilities for data capturing, and high- or low-resolution editing modes. Gutenberg supports graphics, pictures, and text in proportionally spaced characters in all justification modes. It works with most popular dot-matrix and daisy-wheel printers, including Apple DPM, Centronics 737 and 739, Epson MX-80/100 with Graftrax-Plus, NEC 8023A-C, C. Itoh F-10, and Qume Sprint 5/45 and 9/45. It supports a variety of parallel and serial printer-interface cards.

Gutenberg runs on 48K-byte Apple II computers equipped with one disk drive. A shift-key modification is required. The suggested retail price is $325, which includes a backup disk, documentation, a ruler, and a shift-key modification cable. A demonstration disk copy is available at participating Apple dealers. Contact Micromation Ltd., Suite 406, 1 Yorkdale Rd., Toronto, Ontario M6A 3A1, Canada, (416) 781-6675.

Circle 565 on inquiry card.

Software for Fun and Profit

Digital Marketing Corporation's software line ranges from games to sophisticated financial planning and analysis programs. The company has software for word processing, real estate analysis, accounting, customer and product profiles, communications, bibliography collations, medical billing and accounts receivable, proofreading, project and time management, and data compression. Digital Marketing programs are available in most microcomputer formats and run on the IBM Personal Computer and CP/M-, CP/M-86-, and MS-DOS-based systems. For full details, contact Digital Marketing Corp., 2670 Cherry Lane, Walnut Creek, CA 94596, (415) 938-2880.

Circle 566 on inquiry card.

SYSTEMS

Business Computers with 8/16-Bit Architecture

Digilog Business Systems recently started shipping two dual 8/16-bit desktop business computers. The Systems 1016 and 1516 are built on the Z80A processor and Intel's 80186 processor. Standard features include 64K bytes of RAM (random-access read/write memory) for the Z80A, 128K bytes of RAM for the 80186, the CP/M operating system, a 12-inch monitor, 73-key keyboard, and floppy-disk or Winchester-disk storage. Both models can operate as stand-alone 8- or 16-bit computers and serve as workstations in an 8-bit Digilog multiuser network. The System 1016 is offered with 720K bytes of floppy-disk storage or with 1.6 megabytes of Winchester storage. Its companion model can be configured for 5 or 10 megabytes of Winchester storage.

Options include both the CP/M-86 operating system and 128K bytes of additional RAM for the 80186 processor. Prices range from $3995 to $6995, depending upon model and storage capacities. The additional RAM costs $450. Further information is available from Digilog Business Systems Inc., Welsh Road and Park Drive, POB 355, Montgomeryville, PA 18936, (215) 628-4810.

Circle 567 on inquiry card.

www.americanradiohistory.com

What's New?

Entry-Level Computer Has Sound and Graphics

The NEC Home Electronics PC-6000 is an entry-level computer system for home and school. The PC-6000 features sound, color, and the ability to work with black-and-white or color televisions or a NEC composite-video monitor. This system contains 16K bytes of RAM (random-access read/write memory), 16K bytes of ROM (read-only memory), Microsoft BASIC with enhanced graphics and sound capabilities for use with joysticks, and the ability to produce nine colors that enhance text and graphics. The PC-6000's music function has an eight-octave range and uses three independent sound generators. Its 71-key typewriter-style keyboard provides 10 different functions by means of 5 function keys. More than 30 software packages are available for the PC-6000, including games and personal finance programs.

Options for the PC-6000 include a 5¼-inch floppy-disk drive, a cassette data recorder, a 40-character thermal printer, a pressure-sensitive touch-panel for creating images, RAM and ROM cartridge for an additional 16K bytes of memory, an RS-232C interface, and 12-inch monochromatic or color display monitors. The PC-6000 costs less than $450 and is available from NEC Home Electronics Inc., 1401 Estes Ave., Elk Grove, IL 60007, (312) 228-5900.

Circle 568 on inquiry card.

System Supports Five Users

The 16-bit Altos 586 microcomputer supports five users and offers integral Ethernet and Altos-Net network interfaces. The 586 is supplied with a 10-MHz 8086 processor, 256K or 512K bytes of RAM (random-access read/write memory), keyboard, bit-mapped monitor, Multibus-type architecture, proprietary memory-management, power failure detection, and a battery-backed clock and calendar. The 586's six RS-232C ports are upgradable to ten through an integral communications board offering an auto-dial/auto-answer modem. This board provides communication with large mainframes and such protocols as IBM 2780/3780 (synchronous) and X.25. Software includes the Xenix/Unix operating system and the Altos ABS/86 business package. The 586 will support MS-DOS, PICK, CP/M-86, MP/M-86, and Oasis-16 operating systems. Languages such as BASIC, COBOL, FORTRAN, Pascal, and C can be used.

As many as 32 Altos 586s can be networked using high-speed twisted pair cable, which allows more than 200 users to share files, send electronic mail, and pool printers and peripherals. Networking is accomplished with RS-422A cabling connected to the integral interface and Altos-Net software.

Two versions of the 586 family are available. The 586-2 offers dual 5¼-inch 1-megabyte floppy-disk drives and costs $4990. The 586-10 features 10-megabyte 5¼-inch hard-disk storage with floppy-disk backup. It costs $7990. Both are upgradable to 20 megabytes. Contact Altos Computer Systems, 2360 Bering Dr., San Jose, CA 95131, (408) 946-6700.

Circle 569 on inquiry card.

PUBLICATIONS

Computer Curriculum for Teachers, Administrators

Slated for release in May, My Students Use Computers: A Comprehensive Guide for the K-8 Curriculum provides a scope and a set of objectives for integrating computer-related skills and knowledge into the kindergarten through 8th grade curriculum. It's based on a three-year project funded by a grant from the National Science Foundation and developed by Beverly Hunter of the Human Resources Research Organization and an advisory panel of computer educators. Seventy teachers and specialists contributed to this guide, which contains 90 detailed lesson plans and activities for each grade level, guidance for staff development, and a comprehensive list of additional resources. The material was classroom tested throughout the 1981-82 school year.

My Students Use Computers is $23.95, case bound. A shorter spiral bound version for classroom teachers containing only the grade-specific objectives, activities, and resource section costs $14.95. It's available directly from the Reston Publishing Co., 11480 Sunset Hills Rd., Reston, VA 22090, (800) 336-0338; in Virginia, (703) 437-8900.

Circle 570 on inquiry card.

www.americanradiohistory.com

What's New?

Bibliography Lists Computer Periodicals

Microcomputing Periodicals: An Annotated Bibliography lists more than 400 computing magazines and newsletters. Periodicals covered touch all bases from general and specific applications, such as medicine, to individual products. Among the facts provided by this bibliography are subscription address, frequency of publication, and brief descriptions of contents, scope, and audience. An appendix of periodicals that have changed names or ceased publication and a subject index are included.

Microcomputing Periodicals: An Annotated Bibliography is updated constantly. It's $15 from Microcomputing Periodicals, 53 Fraserwood Ave. #2, Toronto, Ontario M6B 2N6, Canada.

Circle 571 on inquiry card.

Detailed Specifications Given in Catalog

The Electronic Power Conversion Division of Gould Inc. has produced a 16-page catalog describing its line of Super Isolation Transformers and AC line conditioners in ratings from 110 V AC to 60 kVA. This free catalog has detailed technical descriptions of five different product lines. AC power-line problems and the appropriate line-conditioning device necessary to solve them are discussed.

The Handbook of AC Power Problems is also available from Gould. It discusses in layman's terms power-line problems that plague computers. The handbook costs $4. Contact Gould Inc., Electronic Power Conversion Division, 2727 Kurtz St., San Diego, CA 92110, (714) 291-4211.

Circle 572 on inquiry card.

Z89/Z90 Software Directory

The Zenith Data Systems Software Directory lists more than 400 programs for Zenith Z89 and Z90 desktop computers. This directory has full-page outlines of accounting, agribusiness, communications, database, graphics, inventory and time management, word processing, and other software packages aimed at business users. Each entry lists the vendor's name and telephone number and provides a summary of the product's features, operating system requirements, programming language, disk size and format, number of drives, minimum memory, and whether source code is available.

The Zenith Data Systems Software Directory costs $25 at Zenith computer dealers and Heathkit Electronic Centers. Zenith Data Systems, 1000 Milwaukee Ave., Glenview, IL 60025.

Circle 573 on inquiry card.

PERIPHERALS

Intelligent Printer Option

The Intelligent Graphics Processor (IPG) merges matrix line printing with microprocessor technology. IPG enables Printronix P-Series printers to perform a variety of functions ranging from forms generation, bar codes, and line or box segment graphics to stored logo graphics and overlays. Programming the IPG is said to be achieved with a simple data file and a command format that's easy to understand and program.

IPG is available as a factory-installed option or as an upgrade for 150-, 300-, and 600-line-per-minute P-Series printers. The suggested price is $1495. For full particulars, contact Printronix Inc., 17500 Cartwright Rd., POB 19559, Irvine, CA 92713, (714) 549-7700.

Circle 574 on inquiry card.

Handprint Data to Your Computer

First shipments of Pencept's Personal Penpad, which lets you handprint data into your personal computer, begin this month. Made up of a writing tablet, a control unit, and an electronic pen, Penpad is purported to be able to recognize the full complement of alphabetic and numeric characters and 15 special characters such as dollar and equal signs. Designed to immediately recognize handprinted data, Penpad builds a memory image of a character by analyzing its shape as it is written. Each character shape is equivalent to 2000 bits of data, which is then further reduced to 7-bit ASCII code and displayed on a video screen. Penpad is equipped with function boxes that merely require a check for initialization. These function boxes can be predefined or specified for individual applications. Other standard features include edit and delete capabilities.

In single units, Personal Penpad costs $3500; quantity discounts are offered. Further details are available from Pencept Inc., 39 Green St., Waltham, MA 02154, (617) 893-6390.

Circle 575 on inquiry card.

www.americanradiohistory.com

What's New?

Vectrix Unveils Color Graphics Line

A line of color graphics systems built on the NEC GDC and the 16-bit 8088 microprocessor has been released by Vectrix Corporation. Intended as a graphics display for a host computer and targeted at both the end-user and OEM (original equipment manufacturer) markets, the VX Series comprises two graphics processors, a 13-inch RGB (red/green/blue) monitor, a color printer, and a keyboard.

The VX128 graphics processor has 627 by 480 pixel resolution, serial and parallel interfaces, eight simultaneous colors, and three-dimensional vector graphics with rotation, scaling, translation, perspective, clipping, viewport, polygons, and filled polygons. This system has the ability to mix graphics and characters using built-in user-definable characters. Bidirectional access to individual pixels is permitted. Also featured are graphics RAM (random-access read/write memory) and high-speed hardware generation of lines, arcs, and multiply or divide.

An enhanced VX128, the VX384 gives you 512 simultaneous colors for shading and bit-plane animation for three-dimensional solid modeling, presentation graphics, and image processing.

Prices for optional equipment range from $295 to $1495. The VX128 costs $1995. The VX384 is available as an add-on board for the VX128 for $2000 or as a stand-alone unit for $3995. OEM discounts can be arranged. For details, contact Vectrix Corp., 700 Battleground Ave., Greensboro, NC 27401, (800) 334-8181; in North Carolina, (919) 272-3479.

Circle 576 on inquiry card.

Disk-Emulation System

Semidisk, a high-capacity disk-emulation system, is designed for Radio Shack TRS-80 Model IIs, the IBM Personal Computer, and S-100-bus-based systems. It's made up of a memory board that plugs into a single slot on the computer's bus and driver software. Like a disk, Semidisk gives you a directory and lets you read, write, execute, or modify files. It can store 512K bytes of data and transfer data at a rate of 200K bytes per second. System highlights include an I/O-mapped hardware interface and a 64k-bit by 1-bit dynamic RAM (random-access read/write memory) chip. All data enters Semidisk through four I/O ports that can be readdressed to any one of 64 locations. Extended addressing or bank-selecting techniques for storing data are not required. Up to 8 megabytes of storage can be achieved with additional Semidisks.

Semidisk software comes in a variety of formats, including 8-inch single-density floppy disk, 8-inch TRS-80 Model II double-density disks, 5¼-inch double-density North Star disks, and IBM Personal Computer 5¼-inch floppy disks. Inquiries about special formats are invited. It runs with the CP/M 2.2 operating system. For the IBM Personal Computer, it requires MS-DOS or CP/M-86. Including documentation and source code, Semidisk costs $1995, postpaid. A 1-megabyte version is $2295, and the user's manual is $10. Contact Semidisk Systems, POB GG, Beaverton, OR 97075, (503) 642-3100.

Circle 577 on inquiry card.

Modem Links IBM PC to Information Services

Ven-Tel's PC Modem Plus is a communications package that connects the IBM Personal Computer to The Source, the Dow Jones News/Retrieval Service, and other information databases. The PC Modem Plus comprises a microprocessor-based auto-answer/auto-dial 300-bps (bit-per-second) modem outfitted with a 2K-byte buffer and an extra serial port, menu-driven communications software, and a standard modular telephone cable. It can operate in both half- and full-duplex modes and is said to be completely hardware- and software-compatible with the Personal Computer. It plugs into the Personal Computer's chassis and can be expanded to 1200-bps full-duplex (Bell 212A-compatible) operation by means of a piggyback card.

The PC Modem Plus has a suggested price of $389, which includes operating instructions. For full ordering and technical information, contact Ven-Tel Inc., 2342 Walsh Ave., Santa Clara, CA 95051, (408) 727-5721.

Circle 578 on inquiry card.

www.americanradiohistory.com

What's New?

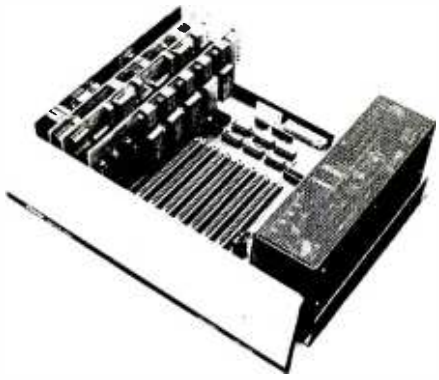

Measurement and Control Systems for Apple and IBM Computers

Data Acquisition Systems is marketing a family of measurement and control systems for the Apple II and the IBM Personal Computer. The DAS Series 500 comprises four modular units, each of which has the ability to accept up to 12 additional I/O library modules for applications flexibility. Standard system components and capabilities include software sampling rates surpassing 20,000 samples per second for A/D (analog-to-digital) inputs, a real-time clock for time-stamping, three programmable interval timers, and internal power supplies. These devices can handle 15,000 conversions per second at 14 bits and offer integrated hardware and software capabilities.

The general-purpose System 500 is said to be configurable for virtually any combination of A/D or D/A inputs and outputs. The System 510, a high-performance data-acquisition system, is tailored for applications requiring A/D conversions. Purported to be a complete measurement and control unit, the System 520 has both A/D inputs and outputs and device-control capabilities. The System 530 features high resolution, low noise, and speed for accurate digitization and generation of complex analog signals.

DAS Series 500 systems use a multitasking language known as Soft500. According to the manufacturer, Soft500 extends Applesoft BASIC for data acquisition, measurement, and control functions. It consists of a real-time, interrupt-driven operating environment and more than 40 statements. For the IBM PC, Soft500 functions as an extended BASIC. This software supports transparent data storage to 768K bytes with memory expansion cards for the Apple II or up to 1 megabyte for the PC.

The Series 500 ranges in price from $2700 to $4400. For full specifications, contact Data Acquisition Systems Inc., 349 Congress St., Boston, MA 02210, (617) 423-7691.

Circle 579 on inquiry card.

MISCELLANEOUS

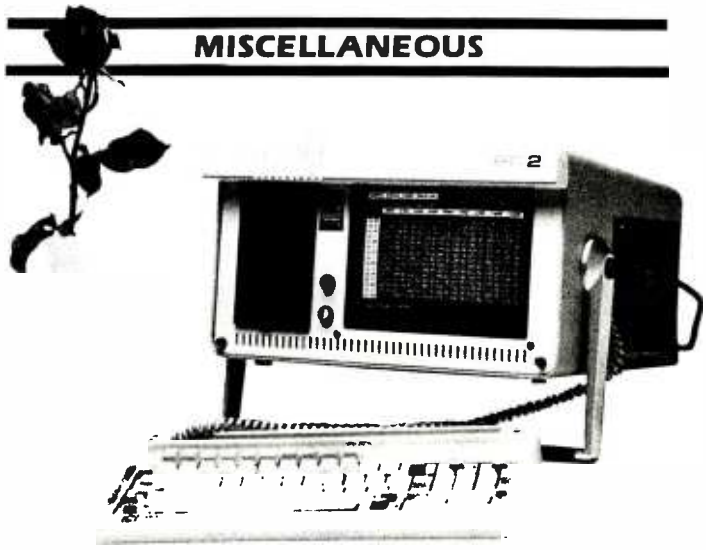

Portable PC-Compatible Computer Kit

The Colby PC-I Conversion Kit allows IBM Personal Computer users to transfer the PC's capabilities into a 26-pound portable unit. The kit includes a 9-inch high-resolution display, switching power supply, wire harness, and interface, enclosed in a 15- by 17- by 8½-inch case with a handle. PC-I is designed to operate with the PC's disk drive, system board, plug-in boards, and keyboard. The conversion is said to require less than one hour and can be performed at participating dealers.

Future options for the PC-I include a modem, a snap-on keyboard, 5¼-inch dual disk-drive capability, and a local networking system. The Colby PC-I costs $899. For purchasing information or specification sheets, contact Colby Computer, 2 Palo Alto Square, Palo Alto, CA 94304, (415) 493-7788.

Circle 580 on inquiry card.

Plug-in CP/M Interface for Apple

Advanced Logic Systems, in cooperation with Digital Research, has announced a plug-in CP/M interface card that lets Apple II and Apple II Plus users run CP/M-compatible applications software. The CP/M Card plugs directly into the Apple and provides an additional 64K bytes of memory. The card uses a 6-MHz Z80B microprocessor and has automatic bank switching with cache memory. It conforms to standard Apple protocols for direct memory access and interrupts. The package includes Digital Research's CP/M

www.americanradiohistory.com

star war

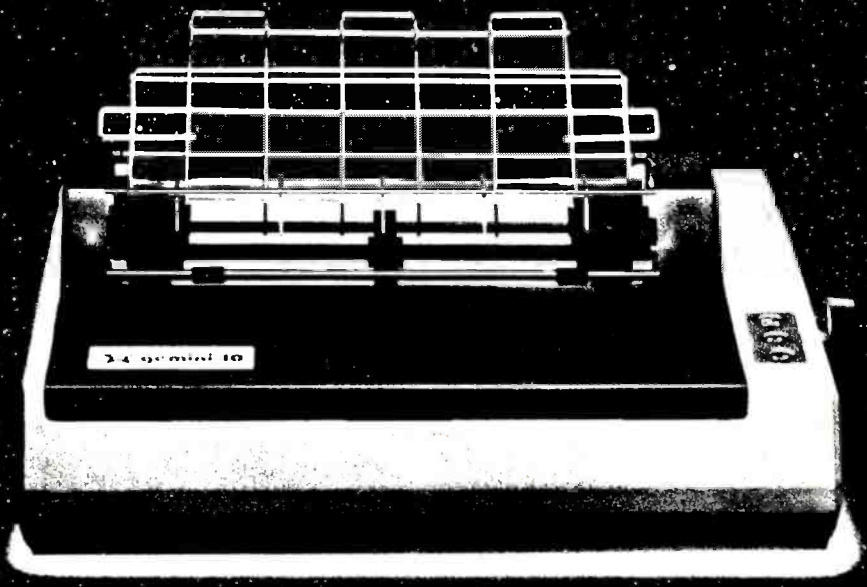

AN ASTRONOMICAL VALUE AND

THE LOWEST PRICES IN THE GALAXY ON

star PRINTERS

CALL: (303) 279·2848 or (800) 525·7877

THE COMPUTER LINE, INC.
GOLDEN, COLORADO
Offer void outside the Milky Way

Circle 112 on inquiry card.

www.americanradiohistory.com

Plus 3.0, CBASIC, and GSX-80 CP/M software and menu-driven utilities from Advanced Logic Systems.

The CP/M Card requires a 48K-byte Apple with two disk drives, DOS 3.3, and a video monitor with an 80-column card. It costs $399 and can be ordered from Advanced Logic Systems, 1195 East Arques Ave., Sunnyvale, CA 94086, (408) 730-0306.

Circle 581 on inquiry card.

Hard Plastic Display Filters

Optech video-display filters have a low-reflection surface that eliminates glare and provides optimum contrast and readability. These filters are made of hard plastic and are supplied with a gasket that seals out dust. Optech filters cost $30 and are available in a variety of sizes to fit most popular displays. For details, contact SGL Homalite, 11 Brookside Dr., Wilmington, DE 19804, (302) 652-3686.

Circle 582 on inquiry card.

Video Cassette Learning Library

The Video Cassette Learning Library from Stoneware is designed to teach new users of Apple II/III computers and IBM Personal Computers how to make their systems work. These video cassettes offer a self-paced, hands-on approach that explains the operation of each computer. The cassettes contain 10 chapters, which guide you from assembling your system to programming in BASIC. This series of how-to video cassettes was produced for Stoneware by Kennen Publishing.

The Video Cassette Learning Library is available in VHS or Beta format. Each cassette is $120. Contact Stoneware Inc., 50 Belvedere St., San Rafael, CA 94901.

Circle 583 on inquiry card.

Computer Work Centers

Once A Tree is offering a line of computer furniture. All items come ready to assemble and are made from solid oak, hand rubbed with oil. A basic computer desk costs $249.95, a utility shelf is $39.95, and a printer stand is priced at $164.95. Dealer inquiries are invited. Contact Once A Tree/Amaro & Son Inc., 3192 Commercial St., San Diego, CA 92113, (619) 421-0441.

Circle 584 on inquiry card.

Where Do New Products Items Come From?

The information printed in the new products pages of BYTE is obtained from "new product" or "press release" copy sent by the promoters of new products. If in our judgment the information might be of interest to the personal computing experimenters and homebrewers who read BYTE, we print it in some form. We openly solicit releases and photos from manufacturers and suppliers to this marketplace. The information is printed more or less as a first-in first-out queue, subject to occasional priority modifications. While we would not knowingly print untrue or inaccurate data, or data from unreliable companies, our capacity to evaluate the products and companies appearing in the "What's New?" feature is necessarily limited. We therefore cannot be responsible for product quality or company performance.

www.americanradiohistory.com

SUPER-FAST!
Z80
DISASSEMBLER
$69.95

Uses Zilog Mnemonics, allows user defined labels, strings, and data spaces. Source or listing-type output with Xref to any device. Available for Z80 CP/M or TRS-80.

SLR Systems
200 Homewood Drive
Butler, PA 16001
(412) 282-0864

Add $2.00 shipping. Specify format required. Check, money order, VISA, Master Card, C.O.D. PA residents add 6% sales tax. Dealer Inquiries Invited. CP/M, TRS-80 TM of Digital Research, Tandy Corp.

Circle 394 on inquiry card.

Scotch Diskettes

Rely on Scotch® diskettes to keep your valuable data safe. Dependable Scotch diskettes are tested and guaranteed error-free. The low abrasivity saves your read/write heads. They're compatible with most diskette drives.



(800)235-4137

VISA

Dealer Inquiries Invited



Circle 331 on inquiry card.

DATA COMMUNICATIONS SPECIALISTS FOR
IBM PC & SEATTLE COMPUTERS

Teleprocessing software available for above computers to time-sharing host or between two users (send binary files, also). Version 2 software. $60: Version 3, IBM PC $95. SEATTLE $160. Write for details or $3.00 for manuals.

SEATTLE 8086 GAZELLE
Computer system.
SPECIAL PRICE for SEATTLE SYSTEM (desktop) + 4-port serial board + cables + choice of Microsoft BASIC, Pascal, FORTRAN, or COBOL.
Write for literature and prices on above systems, or call for quote.

CSCS
COMPUTER & STATISTICAL CONSULTING SERVICES
P.O. Box 5351
Terre Haute, IN 47805
(812) 466-4111

Circle 130 on inquiry card.

THE BURNER I/O

Has a complete EPROM programmer, two serial ports, one parallel I/O port with handshaking and memory management.

Programmer features: • Programs 2704, 2708, 2508, 2758, 2716, 2516, TMS2716, 2732, 2732A, 2764 • CP/M compatible software supplied in EPROM that can be easily written on a diskette. EPROM selection is done with software. Does not use programming modules • Programmer is totally I/O mapped • Programming socket is zero insertion force type • Programming voltages generated on board.

I/O Features: • 2 fully independent RS-232 serial ports • Baud rate Generators are independently programmable from 50 to 19200 baud • Independent 8 bit output, input and status flags • 4 direct sense lines.

Memory management features: • Controls address lines A16-A23 • Is disabled with standard ADSB* signal.

Options: • Complete board with programmer, I/O and memory management, $354.95 • Programmer only, $219.95 • I/O only, (2S + P) $219.95 • Prog. and I/O, $329.95 • Memory management only $109.95.

Memory management may be added to programmer or I/O for $25.00. All combinations are assembled and tested. Delivery Stock Shipping: UPS surface $3.00, UPS air $5.00.

EXTENDED PROCESSING
3861 Woodcreek Lane
San Jose, Ca. 95117
(408) 249-8248

Circle 181 on inquiry card.

FREE! FREE! FREE! FREE! FREE

SEND FOR OUR NEW 1983 PARTS CATALOG

THOUSANDS OF SURPLUS ELECTRONIC PARTS, SUPPLIES AND DEVICES.

ALL ELECTRONICS CORP
905 S. Vermont Ave.
P.O. Box 20406
Los Angeles, Cal. 90006

FREE! FREE! FREE! FREE! FREE! FREE! FREE! FREE! FREE! FREE!

Circle 13 on inquiry card.

RTL

Relocatable Threaded Language **$150**

RTL is a new language which retains the speed and extensibility of Forth but adds many additional advantages as a result of its more structured dictionary. Names, code, and variables are all stored in separate areas for easy generation of headerless, romable code. All code is relocatable. RTL supports local variables, multitasking, redirected I/O, and even allows definitions to be changed retroactively. All source code is included. Versions are currently available or under development for 6800, 6809, 8080, 280, 8086, 8088, and 6502.

RTL Programming Aids
10844 Deerwood SE
Lowell, MI 49331
(616) 897-5672

Circle 410 on inquiry card.

Low IC Prices

2716 ..... **$3.40**
5V 2K x 8 EPROM 450ns

2732 ..... **$4.10**
EPROM 450ns

2764 ..... **$9.00**
EPROM 450ns

6116P-3 ..... **$4.25**
CMOS 2K x 8 static RAM

80C85 ..... **$17.20**
CMOS 8085 CPU, with info

Send for catalog. Quantity prices available. Colorado residents add tax. Add $1 shipping per order. Credit card OK.

Colorado Chips
P. O. Box 111, Frisco, CO 80443

Circle 483 on inquiry card.

SUPER I/O™

Low Cost I/O Expansion Board

Build and interface projects in minutes. Use with any Z80* µ processor. Use simple In/Out instructions. No complicated controllers to init. Features I/O or memory map.
- 32 byte wide channels.
- 16 Input/16 Output.
- 256 bits of I/O. Options for TRS* SINCLAIR* and Z80* socket interface cables.

*Trade marks

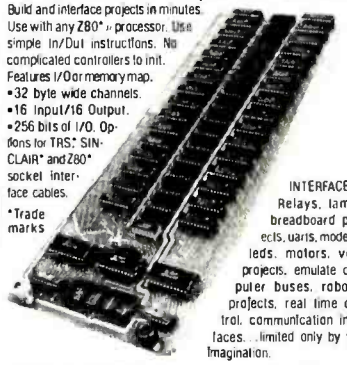

INTERFACE: Relays, lamps, breadboard projects, uarts, modems, leds, motors, voice projects, emulate computer buses, robotics projects, real time control, communication interfaces. . . limited only by your imagination.

WIN/MILL Research, Inc.
INNOVATIVE PRODUCTS FOR INNOVATIVE PEOPLE
453 Crampton Avenue, Reno, Nevada 89502
ORDER PHONE (only) (702) 329-0441
For priority info, send SASE.

Circle 457 on inquiry card.

RanaSystems

EliteOne	$295.
EliteTwo	$499.
EliteThree	$649.
EliteController	$ 89.

apple computer

HARDWARE/SOFTWARE

GARDEN OF EDEN COMPUTERS
13147 Cedar Street
Westminster, CA 92683
714-894-9528
24 Hours — 7 Days
Ask for our newest Price List

Circle 186 on inquiry card.

www.americanradiohistory.com

VIDEO TERMINAL BOARD 82-018

This is a complete stand alone Video Terminal board. All that is needed besides this board is a parallel ASCII keyboard, standard NTSC monitor, and a power supply. It displays 80 columns by 25 lines of UPPER and lower case characters. Data is transferred by RS232 at rates of 110 baud to 9600 baud — switch selectable. The UART is controlled (parity etc.) by a 5 pos. dip switch.

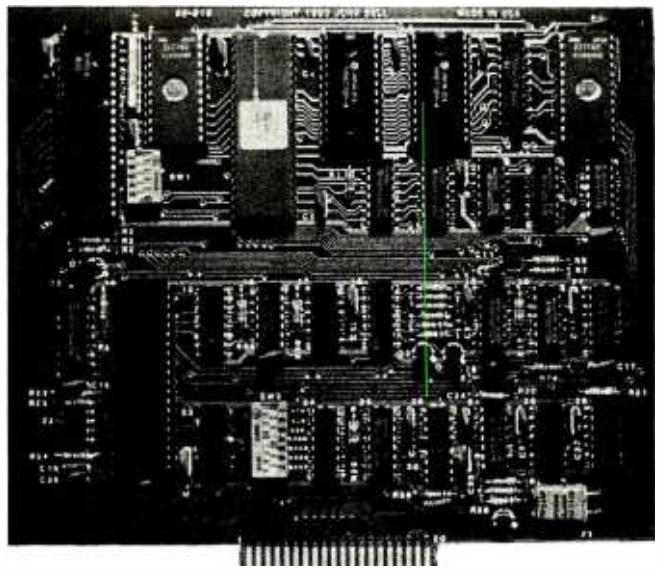

Complete source listing is included in the documentation. Both the character generator and the CRT program are in 2716 EPROMS to allow easy modification to your needs.

This board uses a 6502 Microprocessor and a 6545-1 CRT controller. The 6502 runs during the horz. and vert. blanking (45% of the time). The serial input port is interrupt driven. A 1500 character silo is used to store data until the 6502 can display it.

Features

- **6502 Microprocessor**
- **6545-1 CRT controller**
- **2716 EPROM char. gen.**
- **2716 EPROM program**
- **4K RAM (6116)**
- **2K EPROM 2716**
- **RS232 I/O for direct connection to computer or modem.**
- **80 columns x 25 line display**
- **Size 6.2″ x 7.2″**
- **Output for speaker (bell)**
- **Power +5 700Ma.**
  +12 50Ma.
  –12 50Ma.

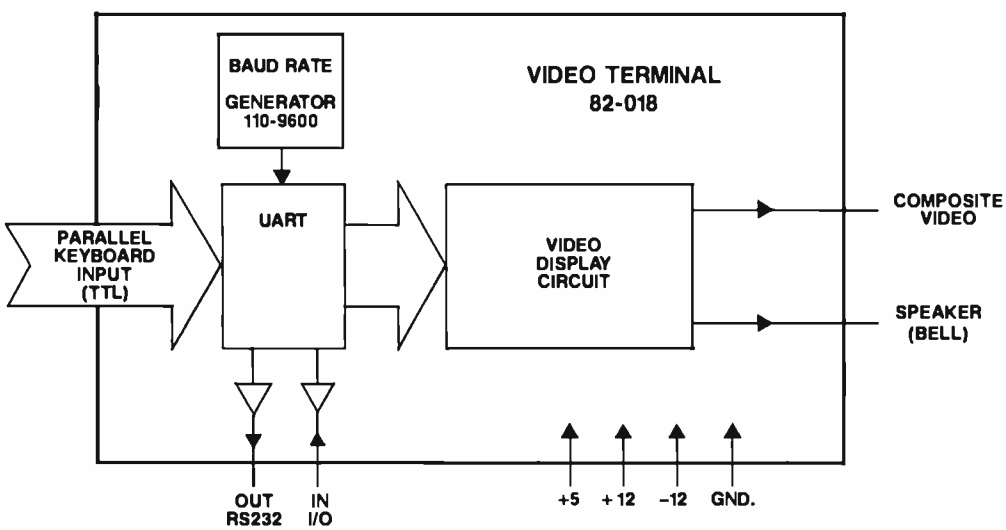

This board is available assembled and tested, or bare board with the two EPROMS and crystal.

Assembled and tested	#82-018A	$199.95
Bare board with EPROMS and crystal	#82-018B	$ 89.95

Both versions come with complete documentation.

JOHN BELL ENGINEERING, INC.

ALL PRODUCTS ARE AVAILABLE FROM JOHN BELL ENGINEERING, INC. • 1014 CENTER ST., SAN CARLOS, CA 94070
ADD SALES TAX IN CALIFORNIA • ADD 5% SHIPPING & HANDLING 3% FOR ORDERS OVER $100

MasterCard

SEND $1.00 FOR CATALOG

(415) 592-8411
WILL CALL HOURS: 9am - 4pm

10% OUTSIDE U.S.A.
ADD $1.50 FOR C.O.D.

VISA

#249

Circle 48 on inquiry card.

www.americanradiohistory.com

NEW! M-68000 SINGLE BOARD COMPUTER

FEATURES:

16 bit Motorola 68000 CPU operating @ 10MHz, 20K bytes on board fast static RAM, 16K bytes of on board EPROM space, 7 levels of prioritied autovectored interrupts, 2 memory expansion buses (up to 256K), 2 serial communication ports (RS-232C), 16-bit bidirectional parallel port, 6800 peripheral accomodation bus, 5x16-bit counter/timers with vectored interrupts, on board real time clock, software compatible with Motorola MEX68KDM board.

PRICE:

Bare board with documentation	$99.95
MEX68KDM5 compatible monitor in 2764 EPROM's	$120.00
M68000 CPU & memory map PROM	$115.00
Shipping and handling ((Domestic)	$3.00
(Foreign)	$15.00

CALIFORNIA RESIDENTS ADD 6% TAX

EMS Educational Microcomputer Systems

P.O. BOX 16115 IRVINE, CA 92713-6115

714-553-0133

Circle 166 on Inquiry card.

THE SORT IBM®

General Sort and Merge Utility
Created exclusively for the IBM Personal Computer
$95

THE SORT SORTS:

- BASIC, PASCAL, FORTRAN COBOL and MailMerge files
- sequential, random files
- records organized by items and lines
- for all common data types (string-text, integer, real, double precision)
- for all common data types (string-text, integer, real, double precision)
- external and internal data representations
- interactive parameter preparation
- record selection

Requires 48 K and one disk drive

Also OMS SOFTWARE DEVELOPMENT SERIES

A. PASCAL SCREEN UNIT - Access screen and keyboard from Pascal program - $40

B. PASCAL DOUBLE PRECISION ARITHMETIC PACKAGE - Increase your Pascal integer arithmetic precision to 32 bits! $40

C. UTILITY PACKAGE - converts videomodes, opens communication lines, speeds up I/O. Sets Epson and NEC tabs $25

*Registered trademark of IBM.

Send order with check/money order to
ORGANIZATIONAL MANAGEMENT SYSTEMS, INC.
3 Chickory Court, Glen Arm, Md. 21057
(301) 668-9011
MD residents include 5% sales tax

Circle 325 on Inquiry card.

NEW PRODUCT!

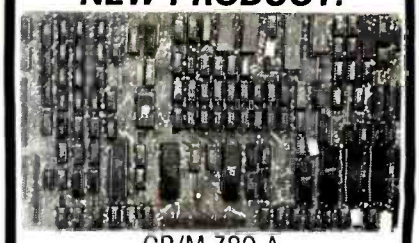

CP/M Z80-A
SINGLE BOARD COMPUTER

- On board video • Wide line and thin line graphics
- 128K of RAM • Sasi Interface • Floppy disk controller for up to four 5-1/4 and four 8 inch drives, single/double density simultaneously • 4 serial ports • Full Centronics printer port • Expansion bus • Extended track buffer • 16K printer buffer
- DMA • Compact size (8-1/4 x 12-1/4)

$600.00 on orders placed and paid for prior to March 1, 1983 FOB Los Angeles, CA $7.00 shipping

INSIGHT ENTERPRISES CORPORATION
373 N. Western Ave., Suite 12,
Los Angeles, CA 90004 (213) 461-3262
Dealer, OEM, International Inquiries Welcome

Circle 211 on Inquiry card.

MicroScript™

Are you wasting valuable time trying to format complex documents with a word processor or obsolete text formatter?

MicroScript™ is a state of the art text formatter specifically designed for the production of technical manuals, specifications, and other complex documents. This powerful tool pays for itself the first time you use it. Featuring:

- generalized markup
- left alignment
- center alignment
- right alignment
- justification
- left indention
- right indention
- bold text
- underscored text
- proportional spacing
- fully definable page
- multiple columns
- headers and footers
- floating text blocks
- footnotes
- variable line spacing
- widow supression
- section numbering
- imbedded documents
- automatic lists
- macro processing
- symbol processing
- table of contents
- direct printer control
- initialization profile
- page numbering

$99 postpaid within U.S., outside U.S. add $10. CA residents add 6%. Specify CP/M-80*, CP/M-86*, MS-DOS*, or PC-DOS*; printer type; disk format.

Software Technique™

6531 Crown Blvd., Suite 3A • San Jose, CA 95120
(408) 997-5026

* CP/M-80, CP/M-86 trademarks of Digital Research. MS-DOS trademark of Microsoft. PC-DOS trademark of IBM Corporation

Circle 399 on Inquiry card.

Scotch® DISKETTES

Call Toll-Free
1-800-328-DISC for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.
All orders shipped from stock, within 24 hours. Call toll FREE

North Hills Corporation
3564 Rolling View Dr.
White Bear Lake, MN 55110
1-800-328-DISC
MN Call Collect 1-612-770-0485

Circle 314 on Inquiry card.

PC/FORTH™

Complete FORTH program development systems for the IBM® Personal Computer. Packages include interpreter/compiler with virtual memory management, line editor, custom screen editor, assembler, decompiler, utilities, file and record access modules, and many demonstration programs. 150 page user manual..... $100.00

Software floating point, Intel 8087 support, color graphics extensions, and target compiler available at additional cost.

Specify PC-DOS or CP/M-86®. One disk drive and 48 kbytes RAM required. Software supplied on 5¼ inch single sided soft sectored double density diskettes.

Laboratory Microsystems
4147 Beethoven Street
Los Angeles, CA 90066
(213) 306-7412

IBM is a registered trademark of International Business Machines Corp
CP/M is a registered trademark of Digital Research Inc

Circle 241 on Inquiry card.

8087 SUPPORT

For the IBM PC and CP/M-86.

8087 CHIP..... $223

APPLICATIONS

FFTs..... $75
MATRIXPAK..... $75

87/88 GUIDE VOLUME I ... $19.95

LANGUAGE SUPPORT

87MACRO™ $150
87BASIC™ $150
87PASCAL™ $150
87FORTRAN™ $150

IBM Personal Computer is a registered trademark of IBM Corp. CP/M-86 is a trademark of Digital Research, Inc. 8087 is a trademark of Intel Corp. 87/88GUIDE, 87MACRO, 87BASIC, 87PASCAL, 87FORTRAN and MicroWare are trademarks of MicroWare Inc.

VISA

MicroWare
P.O. Box 79
Kingston, MA
02364
(617) 746-7341

Circle 288 on Inquiry card.

DISKETTES AND DISKETTE DUPLICATION

DISKETTES (Hub Ring/Write Protect)
Certified 100% error free

	Box of 10
5¼ Single Side/Single Density	$17.50
Single Side/Double Density	20.00
Double Side/Double Density	24.00
8 Single Side/Single Density	20.00
Single Side/Double Density	25.50
Double Side/Double Density	30.00

Specify soft, 10 or 16 sector on 5¼ diskettes
Shipping $1.50 (Cal. add tax)
Money Order/VISA/MasterCard/C.O.D

DUPLICATION

- Duplication services — all popular formats
- All services performed on latest technically advanced equipment
- Prices start at $1.90, including diskette

Please write for full description of all Hoffman services and prices.

Hoffman
COMPUTER PRODUCTS
1720 FLOWER AVE. DUARTE, CA 91010
(213) 303 1571

Circle 201 on Inquiry card.

CALL 800-343-1078 FOR THE BEST P.R.I.C.E.

Call P.R.I.C.E. for big savings on home computers, software, video cassette recorders, car stereo, home stereo, portable radios and tape recorders, cordless telephones, and answering machines, video games, tapes, and movies.

P.R.I.C.E. will beat any legitimate offer on in-stock items. Call our toll-free number now! 800-343-1078. In Mass. 617-961-2400.

P.R.I.C.E.™

67 Teed Dr., B383, Randolph, MA 02368

Circle 330 on Inquiry card.

www.americanradiohistory.com

DECADES OF SERVICE

Washington Computer Services

97 Spring Street
New York, New York 10012

an affiliate of (((WASHINGTON ELECTRIC COMPANY))) est. 1912
CUSTOM COMPUTER ROOM WIRING SINCE 1960

TO ORDER: CALL OUR TOLL-FREE NUMBER: (800)221-5416
In N.Y. State and for technical information: (212) 226-2121
HOURS: 9 AM–5:30 PM (EST) Monday–Friday TELEX: 12-5606 CABLE: WASHCOMP NYK

FULLY CONFIGURED BUSINESS SYSTEMS

The following are some examples of the fully assembled and tested business and scientific computer systems which we offer:

MS INTERNATIONAL — The Premier Multi-User Computer System — CALL
8000 SX, multi-user, multi-processor, turbo DOS — FOR
CPM 2.2. FULL 2 YEAR WARRANTY! — CONFIGURATION
5000IS, S-100 desk top mainframe
On-Site Service Contracts Available

MORROW DESIGNS / ZENITH — MICRODECISION — from below $1200
8088/8055—Runs both 8 & 16 bit software. Green or high res. color. CP/M, MS-DOS

NEC — APC-8086, 16 bit, 128K, 8" DRIVES, Optional 1024×1024 Color Graphic, 32 bit F.P. Proc., MS DOS. CP/M 86 — from $3295

PC-8800 Personal Computer
The Professional's Work Station
NEC on N.Y.S. Contract #P-07220

DEC — 68000 16 bit multi-user, S-100. UNIX V. 7 — $CALL

SEATTLE COMPUTER — 8086 16 bit, 128K RAM, S-100. Syst. #2 — $3499

Systems Group · California Computer Systems · InterSystems · XEROX. · GODBOUT · NorthStar · MORROW DESIGNS · ALTOS
8 & 16 BIT BOARDS & SYSTEMS

SCION MicroAngelo Hi Res Graphics Systems — $CALL

Similar savings on SSM, DELTA, DYNABYTE, TELEVIDEO, DIGIAC, ADOS, DEC. DATA GEN., ATARI, TECHMAR, EPSON, *AND MANY OTHERS*

PRINTERS

Teletype 40. 300 LPM-typerwriter quality, RS-232 interface. This quality printer is available in many configurations including forms access, quietized case, etc. — from Only $3200

Teletype 43 — from $995

ANADEX	DIABLO	MANNESMANN TALLY
CENTRONICS	EPSON	NEC AMERICA
C. ITOH	FACIT	QUME
DATA PRODUCTS	OKIDATA	SMITH CORONA
DIGITAL EQUIP. CORP.	OLIVETTI	TELETYPE
INTERGRAL DATA SYS.	QANTEX	TEXAS INSTRUMENTS

Where Do You Turn To Solve Your Computer Puzzle?



TURN TO US!

We'll show you the easiest way to put the pieces together.

Matched, Compatible, Proven—
Use Someone Else's Engineering to Supplement Yours.

SOFTWARE

Over 2000 business, scientific, professional applications & educational packages are available. Call with your requirements for our advice or a quotation.

8" DISK DRIVE SALE — NOW!

8"SHUGART SA801R $385 — 8"SHUGART SA 851R $540 — 2 for $1025
QUME DATATRACK 8 or MITSUBISHI $550 — 2 for $1050
Enclosure, power supply for 2 8" drives A & T $350
MORROW DISCUS 20 + CP/M® MICROSOFT BASIC, CONT. $950
VISTA $CALL

HARD DISK SPECIALS

CORVUS · MORROW DESIGNS · CAMEO · ROES & XCOMP · KONAN

TERMINALS

PMMI MODEM $359

TELETYPE	ADDS	IBM 3101
TELEVIDEO	ANN ARBOR	DIGITAL EQUIP. CORP.
LEAR SIEGLER	VISUAL	HAZELTINE

AMPEX Dialogue 81™
Interactive Terminal

- Full cursor control
- Full editing keys
- Full visual attributes
- 2 pages (4 page optional)
- Printer port
- Black & White, Green, or Amber screen

$795

NEW!
QUME QVT 102
$669

FIRST OF A NEW GENERATION

PLEASE! Do not confuse us with mail order dealers. We are a full service distributor serving the data processing & installation needs of business & industry from micros to mainframes. System houses, educational institutions & governmental agencies given special consideration. Leasing available.

N. Y. State agencies, municipalities, and schools — call us for information on our O.G.S. term contracts on hardware & software.

DEALER and INTERNATIONAL INQUIRIES WELCOME

For fast delivery, send certified check, money order or call to arrange direct bank wire transfer. Personal or company checks require two to three weeks to clear. Prices subject to change without notice: call for latest prices. Prices include 3% cash discount. N.Y. residents add sales tax. Qantex is a trademark of North Atlantic Industries, Inc. CP/M® is a trademark of Digital Research. All sales subject to our standard safe conditions (available on request). Call for shipping charges. Above prices do not include customization or installation.

Circle 451 on Inquiry card.

www.americanradiohistory.com

SAVE $$$

IBM™-PC USERS

Buy 512K RAM Card/Serial Port direct from the manufacturer

COMPARE OUR PRICES

RAM Card 64K populated, expandable to 512K	$239
RAM Card 128K populated, expandable to 512K	$319
RAM Card 256K populated, expandable to 512K	$479
RAM Card 512K populated	$799
Tandon 100-2 DS/DD Drive	$249
Above each RAM Card with RS232C Port, add	$80
Expansion Kit 64KB(tested), only	$70

LOOK AT THESE FEATURES!

- Multilayer Board for Low Noise
- Socketed for Easy Upgrade to 512K memory
- One Year Warranty • Fully Tested
- Parity Generate/Check - Error Detecting Capability
- Fully compatible with IBM-PC Software & Hardware Specs
- Easy to Follow Instructions Included • No Wait States
- Serial Port may be Configured as COM1 or COM2
- Address Flexibility - Each 64K Block is Address Selectable for any Base Address

Dealers inquiries welcome • Add $5 for Shipping • California Resident, Add 6% Sales Tax

Call or Send Check/Money Order to:

MK Research

14682 Orange Acres • Irvine, California 92714

Telephone: (714)559-1598

Circle 290 on Inquiry card.

TeleVideo™ USERS!

COGITATE Fast Dump/Restore System for TS 802H, 806.

- Back-up files twice as fast as PIP.
- Double the storage, up to 700K/diskette, with multiplediskette capability **$90.00**

COGITATE Type Ahead With Print Screen

- Print key prints screen.
- 64 charactertype aheadbuffer **$90.00**

TurboDOS

- MULTI-USER **$750.00**
- SEMINARS **$250.00**

CP/M® is registered trademark of Digital Research, Inc.

TurboDOS is a registered trademark of Software 2000, Inc.

PLUS OTHER GOOD TELEVIDEO STUFF!

COGITATE, Inc.

SPECIALISTS IN UNIQUE TELEVIDEO SOFTWARE

24000 Telegraph Road, Southfield, MI 48034

(313) 352-2345

VISA/MASTER CARD Accepted

Circle 81 on inquiry card.

Maxell Floppy Disks

The Mini-Disks with maximum quality.

Dealer inquiries invited. C.O.D's accepted. Call FREE (800) 235-4137



PACIFIC EXCHANGES

100 Foothill Blvd., San Luis San Luis Obispo, CA 93401

In Cal. call (800) 592-5935 or (805)543-1037

Circle 331 on inquiry card.

BASF FlexyDisks®

5¼"

Specify soft,

10 or 16 sector	Price/10	Price/100
1 side/double density	$20.00	$185.00
2 sided/double density	34.50	325.00

8" Specify soft or 32 sector

	Price/10	Price/100
1 side/single density	$21.00	$195.00
1 side/double density	29.50	275.00
2 sided/double density	34.50	325.00

Certified Check - Money Order - Personal Check

Allow up to 2 weeks for personal checks to clear.

Add $1.50 to each order for U.P.S. shipping charges.

NJ Residents add 5% NJ Sales Tax

DATA EXCHANGE, INC.

280 Dukes Parkway, P.O. Box 85

Somerville, N.J. 08876 • (201) 725-6680

Dealer Inquiries Invited

Circle 137 on Inquiry card.

ANALOG ⇄ DIGITAL
DIGITAL ⇄ ANALOG

CONVERSION MODULES

SOFTWARE GAIN CONTROL

For additional details about the AD-100-4 and other fine California Data Corporation 100% individually tested, high reliability products, circle the reader service card number below or for faster response write or call us.

CALIFORNIA DATA CORPORATION

3475 Old Conejo Road, Suite C-10

Newbury Park, CA 91320

(805) 498-3651

Circle 69 on Inquiry card.

COMPARE... THEN CALL

(615)727-6000

SYSTEMED CORPORATION

P.O. Box 18, Mountain City, TN 37683

Circle 380 on Inquiry card.

S-100 Single Board WINCHESTER

"EASY DISK CONTROLLER"



- Works with any S-100 CPU + IEE 696
- Supports 5¼", 8" and 14" Drives ST-506, SA-1000, SA-4000 Interfaces
- Record Accessible 1-K sector buffer frees host memory, matches DMA speed
- On-board microprocessor – auto seeks, simple, very small software driver
- Dealers and Distributors invited

Assembled and tested with formatter/test program and operating system drivers.

VISA, MasterCard – specify drive – $545.

Monitor Dynamics, Inc.

1121 West Ninth St. • Upland, CA 91786

(714) 985-7214

Circle 292 on Inquiry card.

5¼" Floppy Disk Drives

(Direct IBM® Plug-in)

TANDON Model TM 100-1 . $189* ea.

TANDON Model TM 100-2 . $269* ea.

12" Green Phospher Zenith Monitor $109* ea.

IBM EXPANSION BOARDS

64K Memory	$275* ea.
128K Memory	$375* ea.
192K Memory	$450* ea.
256K Memory	$510* ea.
Floppy Controller	$180* ea.
16K System BD Memory	$ 25* ea.

MC / VISA or C.O.D. with certified check or money order. Arkansas residents add sales tax.

For information or orders, call

501-777-9859

G-H Computer Systems, Inc.

P.O. Box 871 • Hope, AR 71801

* Plus Shipping.

Circle 185 on Inquiry card.

$99 SINGLE BOARD COMPUTER/CONTROLLER



MODEL MCG-85 FEATURES:

–8085A CPU	–Automatic Baud Rate
–2K System Monitor ROM	–5 Interrupts
–256 Bytes of RAM	–14 Bit Counter/Timer
–RS232C Port	–Onboard Prototyping
–Parallel & Serial I/O	–6.144 MHz Crystal
–Two 8 Bit Prog Ports	–Onboard Expansion
–One 6 Bit Prog Port	• 4K ROM &/or
–4½ x 6½ PCB	• 4K RAM or CMOS RAM

STOCK $99 Kit $135 A&T.

Expansion Boards available. Visa, M.C., Amex & COD accepted.

ATLANTIS COMPUTERS

31-14 Broadway

Astoria, N.Y. 11106

212/728-6700

Circle 36 on inquiry card.

www.americanradiohistory.com

TRAKSTOR.
Your Specialty Store For Drives

LOW, LOW, PRICES!!

HIGH PERFORMANCE REMEX FLOPPY DISK DRIVES

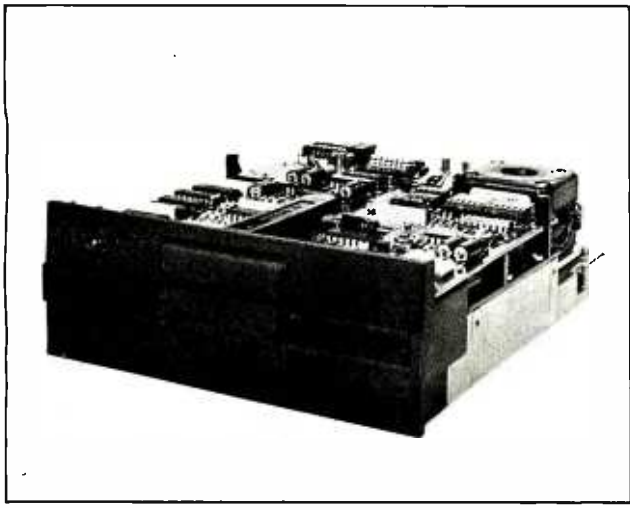

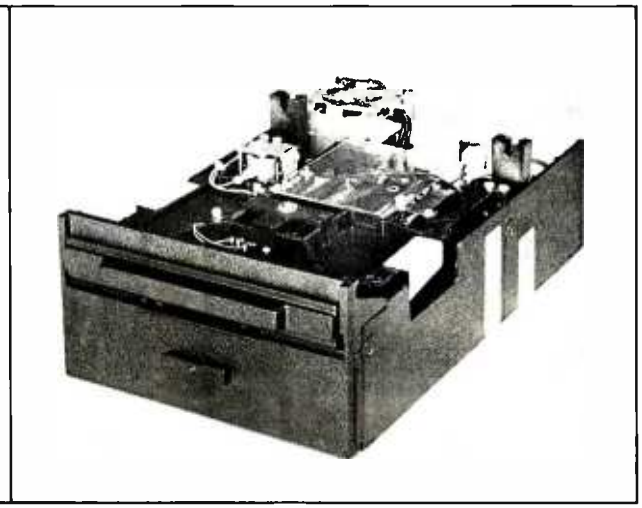

5¼" DISK DRIVES

RFD 480 — **$275**
double sided/double density, 48 tpi
(SA 450/TA 101-2 compatible)

RFD 960 — **$345**
double sided/double density, 96 tpi
(SA460/TA 101-4 compatible)

DC brushless spindle motors for longer life—30,000 hours MTBF!

Specify standard bezel or low profile 2/3 height

8" DISK DRIVES

RFD 2000 — **$295**
single sided/double density
(SA 801R compatible)

RFD 4000 — **$395**
double sided/double density
(SA 851R compatible)

FREE TECHNICAL MANUAL WITH EVERY ORDER

TO ORDER: CALL TOLL FREE (800) 358-4888, CALL (800) 358-4798 in California

TERMS: VISA, MC, BAC, Check, Money Order—U.S. funds only. Prices include sales tax. Shipping and handling charges: $3.00 for first 3 lbs. plus 35¢ for each additional lb. Orders over 50 lbs. sent freight collect.

Shipping weights: 8" drive - 16 lbs.; 5¼" drive - 4 lbs.

TRAKSTOR™

TRAKSTOR
2991 White Star
Anaheim, CA 92686

Circle 153 on inquiry card.

www.americanradiohistory.com

SMITH-CORONA TP-I

Letter Quality Daisy Wheel Printer

- SERIAL OR PARALLEL INTERFACE
- MICROPROCESSOR ELECTRONICS

ORDER TOLL FREE FREE SHIPPING **$569**

(800) 531-5475 (if outside of Texas)
(512) 250-1523 (in Texas)

CompuAdd Corp.
13010 Research Blvd. No. 218
Austin, Texas 78705

Circle 89 on inquiry card.

5¼" Tandon Drives

- **TM 100-1** (single sided, 40 TRK, single or double density) **$189** Free Shipping
- **TM 100-2** (double sided, 40 TRK/side single or double density) **$259** Free Shipping
- **TM 100-4** (double sided, 80 TRK/side 96 TPI, double density) **$349** Free Shipping

ORDER — TOLL FREE

1-800-531-5475 (If outside of Texas)
(512) 250-1523 (If inside of Texas)

"If we can't ship the next working day, we won't take the order."

Master Card/Visa or check.
Texas Residents add 5% sales tax.

CompuAdd Corp.
13010 Research Blvd - # 218
Austin, Texas 78750

Circle 90 on inquiry card.

Atlantic Cabinet Computer Furniture

- A complete range of quality work stations designed specifically to house all micro-computers.
- Delivered heavily packed, in self-assembly form needing only a Phillips screwdriver and a few minutes of your time to assemble.
- Manufactured from 1" all wood particle board surfaced with hard-wearing melamine veneer, in Oak or Walnut.
- Dealer and Distributor inquiries welcome.
- For more information, contact your local dealer, write or call Atlantic Cabinet (301) 223-8900.

ATLANTIC CABINET CORPORATION
P.O. Box 100, Williamsport, Maryland 21795

Circle 35 on inquiry card.

EDGE-86
AN INDUSTRIAL QUALITY 8086 OEM SYSTEM



- **HARDWARE**
  - —A Multibus* COMPATIBLE 8086 CPU BOARD WITH DMA FLOPPY CONTROLLER, INTERRUPT CONTROLLER, PROGRAMMABLE TIMERS, 3 SERIAL PORTS, TWO PARALLEL I/O PORTS, AND 8K BYTES OF PROM WITH BOOT STRAP LOADER FOR CPM/86™.
  - — 128K BYTES DYNAMIC RAM BOARD.
  - — 4-SLOT MULTIBUS CARD CAGE, WITH COMPLETE DOCUMENTATION AND SCHEMATICS; ALL FOR.....$1250.
- **SOFTWARE**
  - — CPM/86 O.S. WITH COMPLETE UTILITIES...$250.

—OFF THE SHELF DELIVERY—

EDGE MICRO SYSTEMS
195 W. EL CAMINO REAL, SUNNYVALE, CA 94086
TELEPHONE: 408-738-4729

* Multibus TM of Intel. ™CPM/86 TM of Digital Research.

Circle 164 on inquiry card.

MEMOREX Flexible Discs



BEST PRICES IN THE U.S.

Call for our special dealer program. C.O.D.'s accepted.
TOLL FREE (800) 652-8168
In California (213) 901-8881

U.S. EXCHANGE
14831 Bessemer St.
Van Nuys, CA 91411-2773

Circle 439 on inquiry card.

Expand Your

With the new ASCI Four Port Intelligent switch all your RS-232C networking problems can be solved. Whatever your switching applications the ASCI Switch allows you to switch with ease. Because the switch is intelligent it allows you to change between peripherals from your keyboard. The code can even be imbedded in your text. When you consider the time you saved due to the simplicity of installation, the elimination of extra cabling and the exclusion of knob turning the ASCI Four Port intelligent switch is the perfect way to expand your networking capabilities.

Advanced Systems Concepts, Inc.
PO BOX O • ALTADENA, CALIFORNIA 91001
(213) 793-8971

Circle 10 on inquiry card.

New Sources of S-100 Bus

Mainframes & Disk Enclosures

Power Regulation meeting previous standards

Ann Arbor Terminals

60 Lines Display
48 Programmable Keys
1,499 prepaid

CALL FOR PRICES

MICRO MIDWEST
10205 W. 69 TERR.
MERRIAM, KS. 66203
913-362-3462

Circle 274 on inquiry card.

ELIZA IS HERE!

AT LAST! A FULL IMPLEMENTATION of the original ELIZA program is now available to run on your microcomputer!

Created at MIT in 1966, ELIZA has become the world's most celebrated artificial intelligence demonstration program. ELIZA is a non-directive psychotherapist who analyzes each statement as you type it in and then responds with her own comment or question — and her remarks are often startlingly appropriate!

Designed to run on a large mainframe, ELIZA has hitherto been unavailable to personal computer users except in greatly stripped down versions lacking the sophistication which made the original program so fascinating.

Now, our new microcomputer version possessing the **FULL** power and range of expression of the original is being offered at the introductory price of only $25. And if you want to find out how she does it (or teach her to do more) we will include the complete **Source Program** for only $20 additional.

Order your copy of ELIZA today and you'll never again wonder how to respond when you hear someone say "Okay, let's see what this computer of yours can actually do!"

ELIZA IS AVAILABLE IN THE FOLLOWING DISK FORMATS:

1. Standard 8 inch single density for all CP/M based computers $25 for ELIZA.COM - add $20 for Microsoft BASIC-80 Source
2. 5¼ inch CP/M for Apple II equipped with Z-80 SoftCard $25 for ELIZA.COM - add $20 for Microsoft BASIC-80 Source
3. 5¼ inch for 48K Apple II with Applesoft ROM and DOS 3.3 $25 for Protected File - add $20 for Applesoft Source
4. 5¼ inch for 64K IBM Personal Computer $25 for Protected File - add $20 for IBM Disk BASIC Source
5. 5¼ inch for Osborne I Microcomputer $25 for Protected File - add $20 for Microsoft BASIC-80 Source

ARTIFICIAL INTELLIGENCE RESEARCH GROUP
921 NORTH LA JOLLA AVENUE
LOS ANGELES, CALIFORNIA 90046
(213) 656-7368 (213) 654-2214
MC, VISA and CHECKS ACCEPTED

Circle 32 on inquiry card.

☆☆ SUPER™ ☆☆ ISA's DATABASE

The only DBMS with all these features:

- ★ PROVEN in one year of test marketing
- ★ TOUGH, reliable file structure
- ★ MENU driven for simplicity and easy use
- ★ ARITHMETIC with stored calculations
- ★ FAST set-up and report formating
- ★ CLEAR user-oriented documentation
- ★ PRINTS totals & subtotals – mail labels
- ★ REFORMATS and merges data files
- ★ MULTI-DISK files: Up to 128K records
- ★ SORTS full disks on up to 40 fields
- ★ PRODUCTION input of repetitive data
- ★ USE existing data files
- ★ COUPLES to word processors
- ★ POSTS transactions to master file
- ★ SEARCH by strings, ranges, comparisons
- ★ DATA COMPRESSION: Over twice as many labels as the other system

For TRS-80* Models I, II, III, & 16 – 250.00
CP/M† – 295.00

Ask your Dealer or Write:

Institute for Scientific Analysis, Inc.
P. O. Box 7186, Dept. B-2
Wilmington, DE 19803 (215) 358-3735

*T.M. Tandy Corp. †T.M. Digital Research

Circle 212 on inquiry card.

www.americanradiohistory.com

WE WILL NOT BE UNDERSOLD

TERMINALS

Zenith ZT-1	$595.00
Zenith Z-19	$679.00
Televideo 910+	$599.00
Televideo 925	$779.00
Televideo 950	$979.00
Sanyo CRX-1100	CALL

COMPUTERS

Sanyo MBC 1000 64K	CALL
Sanyo MBC 1200	CALL
Sanyo MBC 2000 dual 5¼"	CALL
Sanyo MBC 3000 dual 8"	CALL
Sanyo MBC 4000 16 BIT	CALL
ALL SANYO COMPUTERS INCLUDE	
WordStar, MailMerge, CalcStar, SpellStar, InfoStar	
Franklin Ace 1000 64K	CALL
Franklin Ace 1200 128K	CALL
Call for our Special System Packages!	

TELECOMMUNICATIONS

Novation Cat	$139.00
Novation J Cat	$119.00
Novation D Cat	$155.00
Novation Apple Cat	$299.00
Novation Apple Cat 1200 baud	$629.00
Novation Smart Cat	$199.00
Novation Smart Cat 1200 baud	$495.00
Hayes Micromodem II	$299.00
Hayes Smartmodem	$239.00
Hayes Smartmodem 1200 baud	$569.00
Hayes Chronograph	$229.00
Signalman Mark I	$89.00
Signalman—IBM	$189.00

DISKETTES

Verex 5¼"	$23.95
Verbatim 5½"	$26.95
Verbatim 8"	$36.95
Verbatim Head Cleaning Diskette	$9.95
Maxell MD1 5¼"	$29.95
Maxell MD2 5¼"	$44.95
Maxell FD1 8"	$37.95
Maxell FD2 8"	$44.95
5¼" File Box	$19.95
8" File Box	$21.95

MONITORS

Sanyo 9" B&W	$159.00
Sanyo 9" Green	$165.00
Sanyo 12" B&W	$179.00
Sanyo 12" Green	$199.00
Sanyo 13" Color	$399.00
SMD 13" Color	$339.00
Comrex 13" Color	$329.00
Amdek 13" Color	$329.00
Zenith 13" Color RGB	$589.00
Zenith 12" Green	$99.00
Electrohome 13" Color RGB	$599.00
Taxan 12" Amber	$139.00
Taxan 12" Green	$129.00
Taxan 12" Medium Res Color	$319.00
Taxan 12" Hi Res Color	$529.00

The CPU Computer Corporation Announces:

CPUnet™

The Local Area Network that uses real CP/M™ for Apples. CPUnet™ allows you to run hundreds of popular CP/M™ programs, on your Apple terminals, without disk drives! Call for more information.

$2995.00

APPLE ACCESSORIES

16K Card by Microsoft	$79.00
32K Card by Saturn	$199.00
64K Card by Saturn	$419.00
128K Card by Saturn	$585.00
SoftCard Plus by Microsoft	CALL
Keyboard Enhancer by Videx	$125.00
Videoterm by Videx	$259.00
Game Paddle by TG	$49.00
Joystick by TG	$49.00
Pkaso ID-12 Card	$159.00
Pkaso EP-12 Card	$159.00
Pkaso AP-12 Card	$159.00
Pkaso NE-12 Card	$159.00
System Saver by Kensington	$75.00
Microbuffer II 16K (Apple)	$229.00
Microbuffer II 32K (InLine)	$259.00
Microbuffer II 64K (InLine)	$319.00
Add-Ram 16K by ALS	$79.00
Z-Card w/CPM by ALS	$225.00
Z-Card 64K by ALS	$299.00
Smarterm by ALS	$249.00
Smarterm II by ALS	$149.00
Dirt Cheap Video by ALS	$75.00
Color II Card by ALS	$149.00

APPLE SOFTWARE

MICROPRO	
WordStar	$379.00
MailMerge	$190.00
SpellStar	$190.00
DataStar	$259.00
CalcStar	$115.00
VISICORP	
VisiCalc	$199.00
VisiTerm	$89.00
VisiDex	$199.00
VisiPlot	$169.00
VisiFile	$199.00
VisiSchedule	$259.00
VisiTrend/Plot	$259.00
VisiLink	$199.00
Visicalc Business Model	$89.00
MISCELLANEOUS	
MicroTerminal	$69.00
Screenwriter II	$99.00
Dictionary	$79.00
DB Master	$169.00
PFS Filing System	$99.00
PFS Report	$75.00
PFS Graph	$99.00
Easy Writer Pro	$199.00
Easy Mailer Pro	$79.00
Z-Term Pro	$129.00
Word Handler	$149.00
MultiPlan by Microsoft	$229.00
dBase II	$489.00
HowardSoft Tax Preparer	$149.00

IBM PC HARDWARE

Quadram 128K Ram Card	$599.00
Quadram 192K Ram Card	$719.00
Quadram 256K Ram Card	$795.00
Microsoft 64K Ram Card	$399.00
Microsoft 192K Ram Card	$699.00
Microsoft 256K Ram Card	$799.00
Joystick by TG	$49.00
Tandon TM 100-2 Raw Drive	$279.00

TO ORDER CALL TOLL FREE

1-800-343-6522

For fast delivery, send certified checks, money orders, or call to arrange direct bank wire transfers. Personal or company checks require one to three weeks to clear. All prices are mail order only and are subject to change without notice. Call for shipping charges.

IBM PC SOFTWARE

INFORMATION UNLIMITED	
Easy Writer	$289.00
Easy Speller	$149.00
Easy Filer	$319.00
VISICORP	
VisiCalc 256K	$199.00
VisiDex	$209.00
VisiFile	$259.00
VisiTrend/Plot	$259.00
VisiSchedule	$259.00
VisiWord	$329.00
MICROPRO	
WordStar	$379.00
MailMerge	$195.00
MISCELLANEOUS	
SuperCalc	$279.00
SuperWriter	$289.00
Home Accountant +	$129.00
dBase II	$495.00

DISK DRIVES

CCI 121 add-on for Sanyo MBC 1000	$359.00
CCI 100 for the TRS 80 Model I 5¼" 50 track	$299.00
Corvus 5M with Mirror	$2895.00
Corvus 10M with Mirror	$3679.00
Corvus 20M with Mirror	$4579.00
Rana Systems for the Apple II	
Elite One 40 track	CALL
Elite Two 80 track	CALL
Elite Three 80 track, double side	CALL
Elite Controller	CALL
Sanyo EFD 160	$699.00

RAM

16K Ram Kit for Apple II and TRS 80, 4116 chips 200 nano seconds	$17.50

PRINTERS

NEC 3510 Serial	$1595.00
NEC 3530 Parallel	$1629.00
NEC 3550 for the IBM PC	$1995.00
NEC 7710 Serial	$2250.00
NEC 7720 KSR	$2675.00
NEC 7730 Parallel	$2250.00
Epson MX 80	CALL
Epson MX 80 FT	CALL
Epson MX 100 FT	CALL
Epson FX Series	CALL
Epson RX Series	CALL
IDS Microprism	CALL
IDS Prism 80	CALL
IDS Prism 132	CALL
Okidata 82A	$479.00
Okidata 83A	$729.00
Okidata 84	$1149.00
Sanyo PR 5500 Letter Quality	$859.00
Brother HR 1 Letter Quality	$899.00
Toshiba P 1350 160 CPS Letter Quality	CALL

Call For More IBM Software And Accessories

CP/M is a registered trademark of Digital Research.

SPECIAL OF THE MONTH
SANYO PR 5500
LETTER QUALITY
PRINTER
18 CPS—DAISY WHEEL
BI-DIRECTIONAL
$CALL$

The CPU Shop

DEALER INQUIRIES PLEASE CALL 1-800-343-7036

420-438 Rutherford Ave., Dept. BY 3 , Charlestown, Massachusetts 02129

Hours 9 AM – 9 PM (EST) Mon.-Fri. (Sat. till 6) **TWX- 710-348-1796** Massachusetts Residents call 617/242-3361

Technical information call 617/242-3361 Massachusetts Residents add 5% Sales Tax

Circle 124 on Inquiry card.

www.americanradiohistory.com

NEW!! The Apple users group software library bonanza at truly affordable prices. For the first time enjoy your Apple to its fullest capacity using specially packed disks with over 60 **outstanding programs each.** Not available from any other source!

• Applesoft • 3.3 DOS

PROGRAMS $1-EACH & **APPLEWARE INC.** offers An extensive variety of interesting, useful and entertaining programs indispensable to the serious computerist including:

Business	Educational	Graphics
Games	Music	Science
Utilities	Data Base	Finance . . .

Library disks 1, 2 & 3 are mixed categories and new disks 4 (Games), 5 (Utilities), 6 (Graphics) & 7 (Integer) at $59.95 each. Why pay more?

Order direct from this ad and $ave up to $136. Buy disk library package 1, 2 & 3 and get a special bonus disk **FREE** — over 260 programs for $179.95 + shipping. For best value, get all 8 disks for $349, postage prepaid, for over 530 of our best programs at 65¢ each!

Call now toll free: 1-800-327-8664

Florida: 1-305-987-8665

6400 Hayes St.
Hollywood, FL 33024

MasterCharge VISA

Circle 28 on inquiry card.

micro-PROLOG — the fifth generation language for micros

- μ-PROLOG is an interactive version of PROLOG currently available for CP/M 2.xx Z80's.
- PROLOG is the Artificial Intelligence language chosen by Japan as the core language for their Fifth Generation Computers.
- PROLOG grew out of AI research in computational logic. PROLOG means PROgramming in LOGic.
- A PROLOG program comprises a set of facts and rules. It unifies:
  - relational data and relational queries,
  - recursive list processing,
  - pattern directed rule based programming, within a single framework of logic programming.
- Current applications: Expert Systems, Natural Language Understanding, Intelligent Data Bases.

Distribution Formats
5": North Star, Zenith Z89, IBM PC (with Z80 card)
Apple II (Z80 card, lower case req'd), Osborne
8": SS/SD IBM 3740

Need more info? Sample the language with the 160 page Primer. Price can be set against software.

Prices
Software (with $275 Manual & Primer)
Primer $15
Prices include air P&P

LOGIC PROGRAMMING ASSOCIATES Ltd.
10 BURTWOOD CLOSE,
LONDON SW18, ENGLAND

CP/M TM Digital Research Inc., Z80 TM Zilog Corporation, micro-PROLOG & μ-PROLOG TM LPA Ltd.

Circle 247 on inquiry card.

Dysan CORPORATION

Solve your disc problems, buy 100% surface tested Dysan diskettes. All orders shipped from stock, within 24 hours. Call toll FREE (800) 235-4137 for prices and information. Visa and Master Card accepted.



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

Circle 331 on inquiry card.

LOOKING AT PRINTER BUFFERS?



BE CERTAIN...
YOU GET WHAT YOU THINK YOU'RE GETTING:

SPOOL-Z-Q™ is THE COMPLETE, NOTHING ELSE TO BUY, STAND ALONE PARALLEL PRINTER BUFFER PLUS FEATURES NOT FOUND ON OTHER BUFFERS SUCH AS:

- SWITCH SELECTABLE "PAUSE ON FORM FEED" MODE, FOR SINGLE SHEET PRINTING
- AUTOMATIC SPACE CHARACTER COMPRESSION
- 32K CHARACTERS CAPACITY STANDARD, 64K AND 128K MODELS AVAILABLE. USER EXPANDABLE.
- NO HARDWARE OR SOFTWARE MODIFICATIONS REQUIRED
- AND MUCH MORE. WRITE OR CALL FOR FULL DETAILS.

PRICE (32K **INCLUDES CABLE**) $279.95

JVB ELECTRONICS
1601 Fulton Avenue, Suite 1
Sacramento, California 95825
Phone: (916) 483-0709

DEALERS INQUIRIES INVITED

Circle 236 on inquiry card.

Get Graphics On Your DEC* LA120

DECPLOT™ upgrades your DEC LA120 to print graphics fast—only 35 seconds per average page...Just $595. Need color too? Get DECOLOR™...Only $995. Fully compatible with most graphics software and CRT display terminals.

NEW! VT-125
COLOR PRINTER INTERFACE
$495

Texprint's simple plug-in modules require no extra custom software for dot-addressable or character-graphics applications. Expand LA120 performance, yet preserve all original functions. Available now from Texprint or DEC distributors.

*Registered trademark of Digital Equipment Corp.

TEXPRINT™ **TEXPRINT, INC.**
8 Blanchard Rd.
Burlington, MA 01803
(617) 273-3384.

Circle 426 on inquiry card.

ADDS

VIEWPOINT TERMINALS

$495

In addition EPI carries printers DEC & DG compatible terminals and modems. Items in stock are shipped within 24 hours. ALL orders shipped COD. All items are new and in factory cartons with manufacturers warranties.

ECONOMY PERIPHERALS INC.
(404) 952-0213

Circle 162 on inquiry card.

DiscMaster 1000
Videodisc Interface

- Enables computer control of laser videodisc players
- Works with any mainframe, mini, or microcomputer
- Standard RS-232C serial interface
- No modification required to player or computer
- Interactive playback for training, marketing, exhibition, and data retrieval
- All cables and connectors included
- Price: $395

New Media Graphics Corporation
139 Main Street
Cambridge, MA 02142
617-547-4344

Circle 492 on inquiry card.

RAMS
EPROMS

2708	2716	2516
2732	2532	2765
4116	4164	6116

Large quantity 74S/74LS

HANDWELL CORP.
(415) 962-9265
4962 El Camino Real, #119
Los Altos, CA 94022

WHOLESALE — RETAIL

Circle 195 on inquiry card.

POWER PROTECTION FOR YOUR SYSTEM

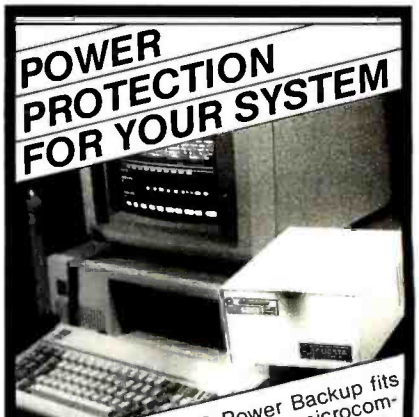

The Datasaver™ AC Power Backup fits most desktop and portable microcomputer systems. Call **Cuesta Systems, Inc.** at (805) 541-4160 for product information and application literature.

VISA/Mastercard orders call (800) 851-6055.

INSTANT POWER

Circle 131 on inquiry card.

www.americanradiohistory.com

NEW LOWER PRICES

"THE ORIGINAL BIG BOARD"

OEM - INDUSTRIAL - BUSINESS - SCIENTIFIC

SINGLE BOARD COMPUTER KIT!

Z-80 CPU! 64K RAM!

(DO NOT CONFUSE WITH ANY OF OUR FLATTERING IMITATORS!)

NEW!

PARTIALLY ASSEMBLED KITS For All Sockets Installed And Soldered Add $50. (Not For Blank PCB)

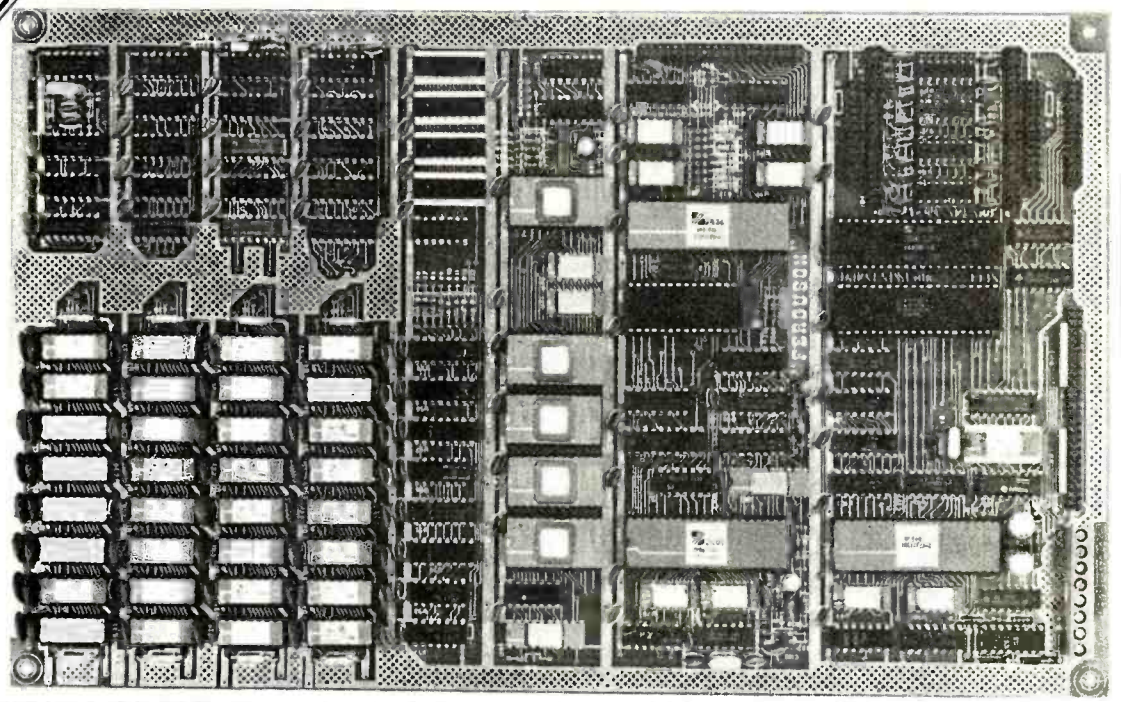

WANT MORE INFO? Full Documentation and Schematics — $5.

THE BIG BOARD PROJECT: With thousands sold worldwide and over two years of field experience, the Big Board may just be one of the most reliable single board computers available today. This is the same design that was licensed by Xerox Corp. as the basis for their 820 computer.

The Big Board gives you the right mix of most needed computing features all on one board. The Big Board was designed from scratch to run the latest version of CP/M*. Just imagine all the off-the-shelf software that can be run on the Big Board without any modifications needed.

$319.00 ** (64K KIT BASIC I/O)

SIZE: 8½ x 13¾ IN.
SAME AS AN 8 IN. DRIVE.
REQUIRES: +5V @ 3 AMPS
+ - 12V @ .5 AMPS.

FULLY SOCKETED!

FEATURES: (Remember, all this on one board!)

64K RAM

Uses Industry standard 4116 RAM's. All 64K is available to the user, our VIDEO and EPROM sections do not make holes in system RAM. Also, very special care was taken in the RAM array PC layout to eliminate potential noise and glitches.

Z-80 CPU

Running at 2.5 MHZ. Handles all 4116 RAM refresh and supports Mode 2 INTERUPTS. Fully buffered and runs 8080 software.

SERIAL I/O (OPTIONAL)

Full 2 channels using the Z80 SIO and the SMC 8116 Baud Rate Generator. FULL RS232! For synchronous or asynchronous communication. In synchronous mode, the clocks can be transmitted or received by a modem. Both channels can be set up for either data-communication or data-terminals. Supports mode 2 Int. Price for all parts and connectors: $39.95

BASIC I/O

Consists of separate parallel port (Z80 PIO) for use with an ASCII encoded keyboard for input. Output would be on the 80 x 24 Video Display.

BLANK PC BOARD — $119

The blank Big Board PC Board comes complete with full documentation (including schematics), the character ROM, the PFM 3.3 MONITOR ROM, and a diskette with the source of our BIOS, BOOT, and PFM 3.3 MONITOR.

24 x 80 CHARACTER VIDEO

With a crisp, flicker-free display that looks extremely sharp even on small monitors. Hardware scroll and full cursor control. Composite video or split video and sync. Character set is supplied on a 2716 style ROM, making customized fonts easy. Sync pulses can be any desired length or polarity. Video may be inverted or true. 5 x 7 Matrix - Upper & Lower Case.

FLOPPY DISC CONTROLLER

Uses WD1771 controller chip with a TTL Data Separator for enhanced reliability. IBM 3740 compatible. Supports up to four 8 inch disc drives. Directly compatible with standard Shugart drives such as the SA800 or SA801. Drives can be configured for remote AC off-on. Runs CP/M* 2.2.

TWO PORT PARALLEL I/O (OPTIONAL)

Uses Z-80 PIO. Full 16 bits, fully buffered, bi-directional. Uses selectable hand shake polarity. Set of all parts and connectors for parallel I/O: $19.95

REAL TIME CLOCK (OPTIONAL)

Uses Z-80 CTC. Can be configured as a Counter on Real Time Clock. Set of all parts: $9.95

CP/M* 2.2 FOR BIG BOARD

The popular CP/M* D.O.S. to run on Big Board is available for $139.00.

BIG BOARD SOFTWARE SPECIAL — $149

Through special arrangement with CDL we offer a powerful package of TDL Z-80 software that has a suggested retail of almost $600. Includes: Extended Disk Business Basic, ZEDIT text editor, MACRO II Macro Assembler, LINKER, DEBUG I and DEBUG II. Supplied on 8 in. diskette with extensive manual.

PFM 3.3 2K SYSTEM MONITOR

The real power of the Big Board lies in its PFM 3.3 on board monitor. PFM commands include: Dump Memory, Boot CP/M*, Copy, Examine, Fill Memory, Test Memory, Go To, Read and Write I/O Ports, Disc Read (Drive, Track, Sector), and Search PFM occupies one of the four 2716 EPROM locations provided. Z-80 is a Trademark of Zilog.

Digital Research Computers
(OF TEXAS)
P.O. BOX 401565 • GARLAND, TEXAS 75040 • (214) 271-3538

TERMS: Shipments will be made approximately 3 to 6 weeks after we receive your order. VISA, MC, cash accepted. We will accept COD's (for the Big Board only) with a $75 deposit. Balance UPS COD. Add $4.00 shipping.

USA AND CANADA ONLY

*TRADEMARK OF DIGITAL RESEARCH. NOT ASSOCIATED WITH DIGITAL RESEARCH OF CALIFORNIA, THE ORIGINATORS OF CPM SOFTWARE
**1 TO 4 PIECE DOMESTIC USA PRICE.

www.americanradiohistory.com

Printed Circuit A/B Switch



- Ideal for switching RS-232 devices
- High Quality Printed Circuit Board
- 3 25 pin D-subminiature Connectors
- 20 circuits switched

Kit & Assembly Drawing ..... $34.95 ppd.
Assembled & Wave Soldered ..... $39.95 ppd.

Visa/Master Charge (201) 227-8411

PMI
16-6 Passaic Avenue
Fairfield, New Jersey 07006

Circle 343 on Inquiry card.

DISKETTES
3M Scotch BRAND

AT SUPER LOW PRICES
WE WILL SHIP YOUR ORDER WITHIN 24 HOURS AND WE PAY THE SHIPPING CHARGES

VISA COD ACCEPTED

DEALER INQUIRIES INVITED

CALL TOLL FREE
800 922-8193

IN CALIFORNIA
800 468-1068

TAYCO
Tayco Business Forms
Computer Supplies
Post Office Box 605
Newbury Park, CA 91320

Circle 416 on Inquiry card.

ZENITH/ Heath Users



Double Your 5¼" disk storage capacity without adding a drive.

Get twice as much from your H88 or H89 microcomputer. Our FDC-880H floppy disk controller, in conjunction with your 5¼" drives, for example, expands memory capacity from 256 bytes to 512 bytes per sector.

And it handles single and double-sided, single and double-density, 8" and 5¼" drives — simultaneously.

C.D.R. Systems Inc.

Controlled Data Recording Systems Inc.
7210 Clairmont Mesa Blvd., San Diego, CA 92111
(714) 560-1272

Circle 74 on Inquiry card.

NO LIMIT Epson Giveaway NO LIMIT

Epson MX70/80 Cartridges

$5.00 EACH
Min. 3 of same color

Reloads $2.50 each Min. 12
$30.00 a Doz. of Same Color
Cartridges and Reloads Available
In Black, Red, Green, Blue, Brown

BT
B.T. Enterprises
Dept. 15C
108 Carlough Rd.
Bohemia, N.Y. 11716

Order Toll Free 800 645 1165 — VISA — NYS Orders Call 516 67 8155
Prices Subject to Change
N Y S Residents Add Tax Add $2.00 Shipping & Handling
B I Enterprises is a division of Bi-Tech Enterprises Inc

Circle 62 on Inquiry card.

TRS-80 MODEL 16 AND 68000 SYSTEMS

DATABASE AND FILE SOFTWARE

Relational Database System
Easy To Use - Powerful

INTRODUCTORY OFFER $595

Menus & English Subset
Query Language
68000 Code Efficiency

Features Never Seen Before.

Send For Catalog.

DATA MANAGEMENT SYSTEMS
211 N. EL CAMINO REAL, 101C
ENCINITAS, CA 92024
or Phone: (619) 942-0744

TRS-80 is a trademark of Tandy Corp.

Circle 138 on Inquiry card.

*** Announcing ***

TEKALIKE

The Graphics Terminal Program

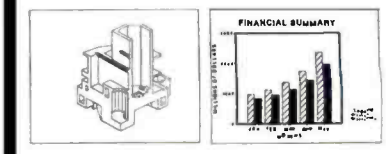

TEKALIKE turns the Apple II computer into an intelligent graphical work station for communication with remote host computers. It simulates the features of a Tektronix 4010 graphics terminal, provides local plotting capabilities and more...

Remote Terminal Mode:
Several Communications Alternatives up to 9600 baud
Local Recording of Graphics Display

Local Computer Mode:
Picture Recall and Redraw Ability
Local Picture Zooming
Plotter Support for Local Hardcopy

Compatible with:
Tektronix 4010 Family
HP-IB DMP Plotters (Houston Instruments HIPLOT, Option 1 (Hewlett-Packard))
Apple Micro-Modem (300 Baud) (DC Hayes)
CCS 7710A (300-9600 Baud) (California Computer Systems)
Apple Communications Card (300 Baud)
Apple Super Serial Card (300-9600 Baud)

Price $200 Plus $12 tax (CA)
Manual Only $25

WE Software
800 Greenwich Drive
Chico, CA 95926

MasterCard and VISA Accepted
To Order Call (916) 893-1162
Dealer Inquiries Welcome

Requires a 48K Apple, one disk drive, and some method of connecting to a host. Apple is a trademark of Apple Computer Inc. Tektronix is a trademark of Tektronix Inc.

Circle 452 on Inquiry card.

DEBUG FAST

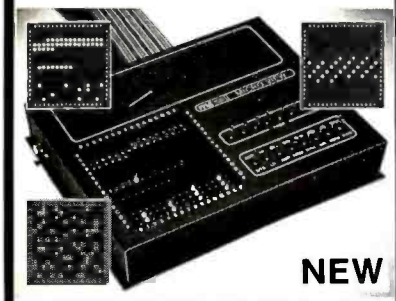

NEW

NEW QUICK LOW-COST μP DEBUG AID. If you program, engineer, test, or repair micros, try this new invention and save endless time and effort. Shows you program flow, address, data, I/O, timing, and stability info on 256 LEDs. Telescopic and microscopic views. Easy, quick, rugged, portable. A smart alternative or addition to multi-thousand dollar instruments. MICRO VIEW™ is just $749 complete. Order today on 14-day trial or circle our number for color brochure. Micro Logic Corp, POB 174, MS-I, 100 2nd St, Hackensack, NJ 07602. (201) 342-6518.

Circle 271 on Inquiry card.

Verbatim®

Floppy Discs

CALL NOW – TOLL FREE
1-800-328-DISC

Dealer inquiries invited. C.O.D.'s and charge cards accepted.

All orders shipped from stock, within 24 hours. Call toll FREE.

NH

North Hills Corporation
3564 Rolling View Dr.
White Bear Lake, MN 55110
1-800-328-DISC
MN Call Collect 1-612-770-0485

Circle 315 on Inquiry card.

When it comes to scientific software for microsystems, **DYNACOMP** *delivers:*

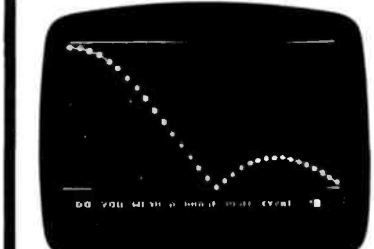

The Systems ...Apple TRS-80 PET/CBM NEC Atari Osborne SuperBrain North Star CP/M

The Software ...

REGRESSION I/REGRESSION II	LOGIC DESIGNER
MULTILINEAR REGRESSION	ACTIVE CIRCUIT ANALYSIS
STATTEST	LOGIC SIMULATOR
ANALYSIS OF VARIANCE	ROOTS
NUMBERCRUNCHER	FOURIER ANALYZER
STATSORT	TRANSFER FUNCTION ANALYZER
DIGITAL FILTER	HARMONIC ANALYZER
DATA SMOOTHER	BASIC SCIENTIFIC SUBROUTINES VOLUME I VOLUME II
SOFTNET-MATCHNET	
FILTER ANALYSIS	BASIC STATISTICAL SUBROUTINES

CALL OR WRITE FOR A FREE CATALOG
DYNACOMP, INC.
1427 Monroe Avenue, Rochester, N.Y. 14618
Telephone: (716) 442-8960

Circle 158 on Inquiry card.

www.americanradiohistory.com

FREE Diskette Storage Case with Order

WE MEET OR BEAT ALL COMPETITORS PRICES

FOR ALL COMPUTER ITEMS CALL

FRANKLIN ACE 1000

- 64K
- Numeric Keyboard
- Large Power Supply

only **$969.00**

Disk Drives for Apple & Franklin

	Qty. 1	Qty. 2
Rana Elite I	$299	$289
Rana Elite II	439	429
Rana Elite III	569	559
Rana Controller	99	89
Micro Sci A-2	269	259
Micro Sci Contlr	79	73
Quentin Drive	259	249
5MB Winchester	1499	–
10MB Winchester	1699	–
15MB Winchester	1899	–
20MB Winchester	2099	–

FRANKLIN SYSTEM

- ACE 1000
- BMC 12A Grn Monitor
- Disk Drive and Controller

40% OFF **$1387**

Unbeatable Price

Reg Price $2312.00 SAVE $924.80

APPLE II

- Plus 48K

only **$989.00**

(Not an Authorized Apple Dealer)

Apple Accessories

80 Column Card	$189
16K Memory Card	59
Box of Disketts w/ring	18
Grappler +	118
TG Joystick	39
Microsoft Premium Pk.	459
D Base II	449
Parallel Card & Cable	49
Quentin 16K Card	54

NEW! TOSHIBA PRINTER
Call (213) 219-0811 for the best price!

IBM PRODUCTS

AST Combo + 64K	389
D Base II	449
TG Joystick	49

Tandon 5¼" Drives

	Qty. 1	Qty. 2
TM 100-1 Sgl. Side	$189	$179
TM 100-2 Dbl. Side	254	244

Maynor for IBM

Floppy Disk Controller	$179
Floppy Disk Controller with Par. Port	209
with Ser. Port	229
64K Ram Board	199
128K Ram Board	249
192K Ram Board	299
256K Ram Board	369
w/Serial Port Add	79

Cabinets — 5¼"

Single cabinet power supply	$ 59
Double cabinet Power Supply	99

Cabinets — 8"

Single cabinet, pwr supply, fan	$249
Dual cabinet, pwr supply, fan	279

SEE US AT PRODUX 2000
Los Angeles Convention Center
April 28-30

MONITORS

BMC 12A (15MHz)
90 day warranty
only **$75.00**

Zenith (15MHz)	$ 99
BMC 12A (15MHz)	75
BMC 12EU (20MHz)	129
BMC Color	279
Amdek 300G	149
Amdek Color I	309
Many other Monitors Available	Call

8" DISK DRIVES

8" Sgl. Side/Dbl. Density

- FDD 100-8
- Same as 801R

only **$219 ea.**

10 for **$200 ea.**

Shugart

801R Sgl side/Dbl Den	$369
851R Dbl side/Dbl Den	469

Qume

DT-8 Dbl side/Dbl Den	$479

Mitsubishi

Mit. Dbl side/Dbl Den	$409

Tandon

TM 848-1 Thinline	$369
TM 848-2 Thinline	459

Circle 87 on inquiry card.

PRINTERS

C. IOTH 8510A Prowriter 120cps	$425
Gemini 10 (same as MX80FT) 100cps	375
Gemini 15 (same as MX100) 100cps	499

C. Ioth

8510A Prowriter	$425
8510 ACD Prowriter Serial	569
F10 40 PU Starwriter	1349

Epson

MX80 FX	Call
MX80 FT III	489
MX100 FT III	599

Okidata

ML82A, 120cps	$ 389
ML83A, 120cps	649
ML84 Parallel, 200cps	985
ML84 Serial, 200cps	1075
ML92, 160cps	519
ML93, 160cps	899
ML2350, 350cps, 2K buf.	1999

All Okidata Options Available

OTHER PRODUCT LINES

Not Listed

• Anadex • California Computer Systems • Hayes Micro Computer • Micro Pro • Toshiba • Nec America • Practical Periphial • QT Computer Systems • Vista Computer • Verbatim Corp • Call Cables & Card Cages Available

Computer Components Unlimited

RETAIL STORE:
12308 Burl Avenue
Hawthorne, CA 90250

MAIL ORDER:
P.O. Box 1936
Hawthorne, CA 90250

Customer Service:
(213) 219-0811

Order Desk:
(213) 219-0808

9 a.m. to 9 p.m. (PST)

All merchandise new. We accept MC, Visa, Check & P.O.'s from qualified firms. CA Res. add 6½% Sales Tax. Please add shipping: 53.50 first 5 lbs., 60c ea. add. lb.

www.americanradiohistory.com

IEEE-488 TO TRS-80* INTERFACE

Everything needed to add *powerful* BASIC GPIB-488 controller capability to TRS-80 Model 1 or 3, Level 2 or DOS with a minimum of 16K.

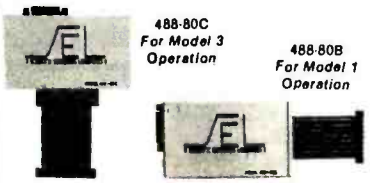

488-80C
For Model 3 Operation

488-80B
For Model 1 Operation

Model 488-80B or 488-80C Price: $375.
+ shipping, insurance & tax
WHEN ORDERING SPECIFY DISK OR TAPE

SCIENTIFIC ENGINEERING LABORATORIES
11 Neil Drive • Old Bethpage, NY 11804
Telephone: (516) 694-3370

**Trademark of Tandy Corp.*
There is no affiliation between Scientific Engineering Laboratories and Tandy Corp. or Radio Shack.

Circle 384 on inquiry card.

BREAKTHROUGH

Originate/Answer UDS 212 LP Modem

~~$495~~ $395

IMMEDIATE DELIVERY
- Compatible with Bell 212 modems (1200 bps only)
- Telco powered—no AC connection required
- Simplified controls—talk/data and originate/answer only
- Direct-connect to dial-up network

INNOVATIVE COMM.
1111 W. Dundee Road
Wheeling, IL 60090
Sales—(312) 459-8886
Service—(312) 459-8874

Circle 221 on inquiry card.

NEW! S-100 BUS COMPATIBLE

SINGLE BOARD COMPUTER WITH VIDEO OUTPUT

USES:
This card can function as a stand alone single board computer or as a S-100 intelligent video interface card.

FEATURES:
4MHZ Z80A™, up to 8K of EPROM, up to 4K Static RAM, two 8181T input ports and 2 INT output ports, one 8 BIT sense input port with selectable composite video output (8bit/248 video attributes), reverse video, underline, blinking, graphic capabilities.

PRICE:

Bare board with documentation	$49.95
Monitor and video terminal software (in EPROM)	$45.00
Source listings (with Monitor Purchase)	$15.00
Hard to find Parts Kit (crystal and fuse link PROM's)	$15.00

CALIFORNIA RESIDENTS ADD 6% SALES TAX

EMS Educational Microcomputer Systems
P.O. BOX 3435 BRUEA, CA 92665
714-553-0133

Circle 167 on inquiry card.

APPLE HARDWARE

40% to 70% off!!

Stock Number		Retail Price	Now Only	% Off
API01	16K RAM card	$149	$49	67%
API02	80 Column card	295	159	46%
API03	9" Monitor green(very sharp)	199	119	40%
API04	Clock/cal card	195	109	44%
API05	Disk-II drive w/controller	498	249	50%
API06	Disk-II controller	150	89	41%
API07	Joy-stick delux	49	25	49%
API08	Language card only	295	159	46%
API09	Lower case	45	25	44%
API10	Parallel card	150	59	61%
API11	Serial card	195	89	54%
API12	Sup-R-Mod	39	25	36%
API13	Tel-Modem (RS-232)	120	75	38%
API14	Z-80 card	298	139	53%
AP201	Apple-II+ compat. 48Kkit	599	320	47%
AP202	Hardcase for AP201 (plastic)	175	119	32%
AP203	Keyboard for AP201	139	78	44%
AP204	Power supply for AP201	120	75	38%

We accept Visa, Master Chg, C.O.D., Personal checks.
All prices good thru Jan. 31, 1983

K & D ELECTRONICS CO.
1440 PACIFIC COAST HWY., #104
HARBOR CITY, CA 90710
(213) 530-2577

Circle 237 on inquiry card.

wabash®

When it comes to Flexible Disks, nobody does it better than Wabash.

MasterCard. Visa Accepted.
Call Free: (800) 235-4137



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401 (In Cal. call
(805) 543-1037)

Circle 331 on inquiry card.

S-100 COLOR GRAPHICS!

MICROSPRITE

THE STATE-OF-THE-ART COLOR GRAPHICS BOARD FOR THE S-100 BUS.

- Display consists of backdrop and pattern planes plus 32 sprite planes.
- Each pixel in a plane can be colored or can be transparent to reveal the underlying plane(s).
- Prioritized planes eliminate the need for hidden object routines in applications requiring 3D simulation.
- Sprites are moved on screen by changing two-byte pointers thus simplifying animation applications.
- Up to 15 colors or 8 gray levels with a resolution of 256 pixels horizontally and 192 pixels vertically.
- Standard NTSC video output connects directly to color monitor or to RF modulator for use with regular color receiver.
- One text and three graphics display modes.
- On-board 16K byte display RAM separate from system RAM.
- High quality PC board with solder masks, silkscreen and gold-plated contact fingers.
- Meets or exceeds all aspects of IEEE-696 (S-100) standard.
- Documentation includes comprehensive user's manual with demonstration programs and Texas Instrument's manual for the new TMS9918A Video Display Processor used on the board.
- Typical applications include business graphics, industrial process monitoring, drafting/design aid, educational systems and video game development.

$249.95
(assembled & tested)

We pay UPS ground shipping in the continental U.S. UPS air add $2.00. COD add $1.50. Foreign add $15.00. TN residents add 6% sales tax. VISA & MASTERCARD welcome.

MicroDynamics Corporation
P.O. Box 17577
Memphis, TN 38117
(901) 755-0619

Circle 281 on inquiry card.

Got a computer?

Get a Giltronix Selector Switch.

Eliminate unplugging and re-plugging your CPU's, peripherals, and modems. Eliminate expensive duplication of interconnection hardware. Connect three components to Giltronix Selector Switch #S8AB. Then select your connection with a simple turn of the dial. Only $79 in OEM quantities. Monitoring options available. Full 5 year warranty on all Giltronix units.

SWITCH TO GILTRONIX.

GILTRONIX, INC
UNIVERSAL INTERFACE PRODUCTS

970 San Antonio Ave., Palo Alto, CA 94303

Circle 192 on inquiry card.

SIGMATEK INTERNATIONAL CORPORATION
327 Clarkin Ct., Walnut Creek, CA 94598

(415) 938-5097

MICROPROCESSOR CRYSTALS (MHz)

1.000	1.2288	1.6896	1.8432		4.00 each
2.000	2.097152	2.4576			3.00 each
3.2768	3.579545	4.000	4.194304	4.433619	2.00 each
4.9152	5.000	5.0688	5.185	5.7143	2.00 each
6.000	6.144	6.400	6.5536	7.000	2.00 each
7.3728	8.000	10.000	11.000	12.000	2.00 each
14.31818	15.575	18.000	18.432		2.00 each
19.6608	20.000	22.1184	32.000	48.000	2.50 each

TUNING FORK CRYSTALS (3 x 8 Miniature)

32.768KHz	1.50 each
30KHz to 50 KHz	Inquire

EPROMS

2532 (5V, 450ns)	4.75 each
2732 (5V, 450 ns)	4.50 each
2764 (5V, 450ns)	10.00 each

DYNAMIC RAMS

4164 (150ns)	7.00 each

N.A.S.H.U.A.
5¼ mini floppy diskette
SS/SD Soft Sector 20.00 box/10 pc.

Minimum order $10.00. For shipping include $2.00 for UPS ground, $3.00 for UPS Blue Label Air. California residents add sales tax.

Circle 392 on inquiry card.

Sprint 68 Microcomputer

CONTROL COMPUTER DEVELOPMENT SYSTEM
6800 MPU, serial I/O, 48K RAM, dual 8" drives, WIZRD multitasking DOS, editor, assembler, 16K BASIC, all for $3949.

OPTIONS
C, PL/M, PASCAL, FORTRAN, EROM programmer, analog I/O, parallel I/O, 488 GPIB interface, CMOS RAM/battery, power fail detect/power on reset

WINTEK

Wintek Corp.
1801 South Street
Lafayette, IN 47904
317-742-8428

Circle 458 on inquiry card.

www.americanradiohistory.com

CHRISLIN YEARS AHEAD IN MEMORY DESIGN

COMING SOON! 1 MB DUAL BOARD MEMORY!

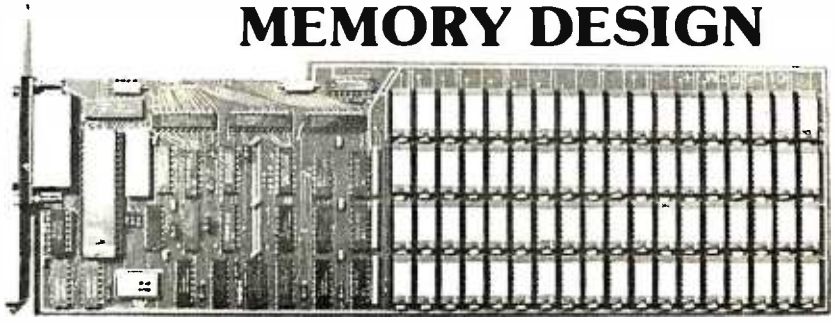

512KB SINGLE BOARD IBM MEMORY W/RS232-C PORT

- Addressable as a contiguous block in 64KB increments thru 1 megabyte.
- On board parity with interrupt on parity error.

SINGLE QTY. PRICE: $895.00 **MEMDISK 1: $10.00**

MEMDISK 1 Allows memory to emulate disks. Increases system performance!!

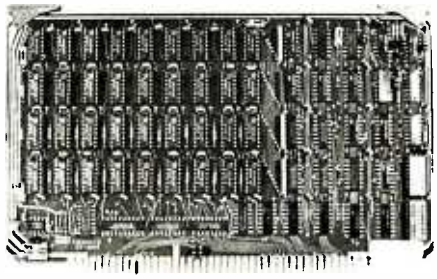

64KB SINGLE BOARD EXORCISOR 1, 11, AND ROCKWELL SYSTEMS 65 MEMORY

- Parity checker on board.
- Addressable as a contiguous block in 4K increments with respect to VXA or VUA.
- Pin to Pin compatibility.

SINGLE QTY. PRICE: $390.00

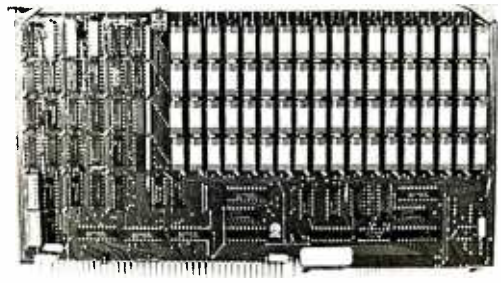

512KB SINGLE BOARD MULTIBUS MEMORY

- Pin to Pin MULTIBUS compatibility for both 8 bit and 16 bit systems.
- On board parity with selectable interrupt on parity ERROR.
- Addressable as a contiguous block in 16K word increments up to 16 megabytes.

SINGLE QTY. PRICE: $1395.00

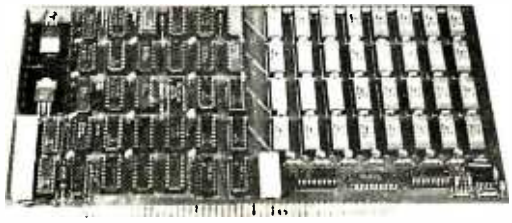

64KB SINGLE BOARD S100 MEMORY

- Addressable as a contiguous block in 4K word increments.
- Battery back-up capability.
- Functions with on-board refresh.

SINGLE QTY. PRICE: $390.00

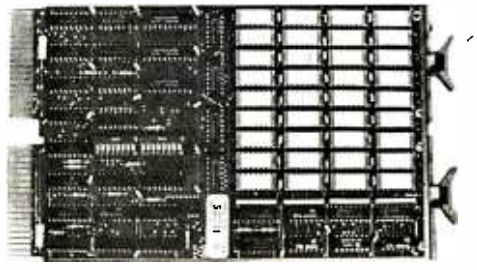

256KB SINGLE BOARD LSI 11 MEMORY

- On board parity generator checker.
- Addressable as a contiguous block in 4K word increments through 4 megabytes.
- Battery back-up mode.

SINGLE QTY. PRICE: 128K x 18 $795.00
32K x 18 $390.00

DON'T ASK WHY WE CHARGE SO LITTLE, ASK WHY THEY CHARGE SO MUCH.

Chrislin Industries, Inc.

31352 Via Colinas • Westlake Village, CA 91362 • 213-991-2254
TWX 910-494-1253 (CHRISLIN WKVG)

Multibus is a trademark of the Intal Corp. LSI II is a trademark of Digital Equipment Corp. EXORciser is a trademark of Motorola.

Circle 79 on inquiry card.

www.americanradiohistory.com

C SCREEN EDITOR

CSE: A full-screen text editor written in C

- Powerful command set includes cursor control, find/replace, block move, file inclusion, and nested macro commands
- Installation program allows easy customization for most popular terminals
- Available for CP/M-86[1], MP/M-86[1], CP/M 2.2[1], MS-DOS[2], and IBM PC[3]
- Requires 64K CP/M-86 or equivalent MP/M-86; 56K CP/M 2.2; 64K MS-DOS; 64K IBM PC
- Includes object code, C source code, and manual
- Available in 8" SSSD format for CP/M-86, MP/M-86, CP/M 2.2, MS-DOS
- **$60.00,** including UPS; additional versions $20.00 each

8080 SIMULATOR

SIM80: An 8080 simulator for the 8086/8088

- Run CP/M object code (.COM files) on any CP/M-86 or MP/M-86 system : ASM, DDT, dBase II[4], C/80, MBASIC, etc.
- Retain applications software when upgrading from CP/M to CP/M-86
- Develop and debug CP/M software on CP/M-86
- 8K overhead. TPA can be 61K
- 1/3 to 1/10 as fast as a 5 Mhz 8085 (not recommended for highly interactive programs such as Wordstar[5], or for very large, slow interpreted BASIC programs)
- Includes object code, ASM-86 source code, and manual
- Available in 8" SSSD format for CP/M-86, MP/M-86
- $50.00, including UPS

Both CSE and SIM80 for $90.00

Northwest Microsystem Design

P.O. Box 10853 • Eugene, OR 97401 • (503) 689-7010

[1]tm. Digital Research; [2]tm. Microsoft; [3]tm. IBM; [4]tm. Ashton-Tate; [5]tm. Micropro

Circle 316 on inquiry card.

EPROM EMULATOR AND DEVELOPMENT SYSTEM

$299 KIT, $495 COMPLETE

System includes chassis and power supplies (+5V, ±12V, +25V)



- 280A CPU, 8K EPROM and 8K RAM
- on-board EPROM programmer
- EPROM emulator socket
- RS-232 port, Z80 PIO and Z80 CTC
- audio-cassette interface
- S-100 bus extension
- user function keys
- Tiny BASIC and DEBUGGER

Yang Electronic Systems, Inc.

307 Compton Avenue, Laurel, Maryland 20707

(301) 776-0076

Circle 467 on inquiry card.

GAME DESIGNER

At new low prices and with an expanded product line

Game Development Systems for: Atari® 2600 VCS,™ Atari 5200 Supersystem™ & Colecovision.™ Host environment options: Apple II,® Atari 400/800, IBM® PC, TRS-80,® VIC-20® & more. Memory options of cartridge: 4K to 16K (bankswitching).

frobco: The Toolmakers of the Cartridge Industry

Call 408-429-1552 for more details or write: frobco, P.O. Box 8378 Santa Cruz, CA 95061-8378

Circle 430 on inquiry card.

Now...You Can Monitor 7 Most Important RS-232 Interface Lines

Made in America

RS-232-INTERFACE TESTER

connects in series with any RS-232 interface. LED's clearly display status of 7 functions: transmit data, receive data, request to send, clear to send, data set ready, carrier detect, data terminal ready. Requires no power; may be left in permanently. Satisfaction guaranteed. **ORDER NOW! Only $39.95 plus $1.75 for postage and handling.** (IL res. add 5% sales tax); we accept MC, Visa. FREE: illustrated catalog of problem detecting equipment. Phone 815/539-5827. Make checks payable to.

B&B electronics

Box 475 B, MENDOTA, IL 61342

Circle 43 on inquiry card.

Dot Matrix Printer Interfaces with Apple II

Featuring an Apple II®-compatible parallel interface, Addmaster Corporation has produced a new dot matrix printer, Model 170. The interface includes a Centronics-type handshake and DB-25 interface connector, Baudot, and day — and time clock. The Model 170 provides 18 or 21 characters per line, 6 lines per inch print density, on standard 2½" adding machine tape. Designed to use with personal computers, Model 170 will produce hard and carbonless copies of programs, data or results. **Write Addmaster Corporation, 416 Junipero Serra Dr., San Gabriel, CA 91776 or call 213/285-1121.**

Circle 7 on inquiry card.

MORROW DESIGNS DECISION 1

If you already buy either an upgrade or a terminal & printer. Else $3095 — **$2995** W/5 MEG HD & 5¼" SSDD & CP/M ONLY

Same-Day Board Swap (Airport to Airport)

INCLUDING MORROW TERMINAL. ELSE $3545 — **$3995** W/5 MEG HD & 5¼" DSDD OR ADD FOR 16 MEG

*D3A, 14 Slot S-100, Z-80, 65K Static, 1105 user (Need more memory, Software & I/O for 6 users) Desk top, with 3 Serial & 1P, CP/M; Wordstar; Basic 80; Correct-It; Logicale; Bazic; Pilot; & Pearl DBM Data Base Management System. Shipment from factory with factory warranty. Professional tutoring buddy system for beginners.

CPC also includes with (*) systems: Payroll, GL, AR, AP, Fixed Assets, Raw & Finished Inventory, Mail List, Transcendental Pak, Loan Amortization, 6 Function Compound Interest. 400K of CPM Utility Source Code, and StarTrek.

CompuPro — *All CompuPro cost-plus 10% or less. Shipment from distributor's stock. Call for our system prices. Includes CPC software.

TeleVideo — *Computers, terminals & software at cost-plus prices. Call

dBase II Ashton-Tate — Full line of dBase II, Financial Planning, Forecasting, & related software. Also Fox & Geller.

PRINTERS: OKI, Citoh, NEC, Diablo, M/T, etc.

TERMS: Cash with order. Add 2% handling. 10% cancellation, 15% restocking charge. FOB ship point.

CALL US 9 AM to 10 PM

205 879-5976
205 879-4735

CostPlus COMPUTERS

P.O. Box 6114 • Birmingham, AL 35259-6114

Our bank is 1st National of Birmingham, (205) 326-5120

Circle 122 on inquiry card.

NEW

MAIL ORDER SHOPPERS **AMAZING NEW DIRECTORIES** WHERE TO BUY PRODUCTS FOR ANY POPULAR BRAND OF COMPUTER

- Hundreds of Mail Order Dealers
- Thousands of Products
- Save Time—Save Money

Computers, Software, Hardware, Accessories, Supplies and More

22 Sections Devoted To Specific Brands of Computers

DIRECTORY VOL.1—$6.95

Altos™ Apple™ Atari™ Commodore™ Compupro™ Compustar™ Cromemco™ Digital™ HP™ IBM™

DIRECTORY VOL.2—$6.95

NEC™ Northstar™ Sanyo™ Seattle™ Sinclair™ Superbrain™ TRS-80™ Televideo™ Vector™ Victor™ Xerox™ Zenith™

Both For $12.95

Plus $0.50 Each P&H

Check or MO, Calif. Orders Add Sales Tax

CAVERLY'S INC.

DEPT. B-3, 512 BRIDLE CT., WALNUT CREEK, CA 94596

Circle 71 on inquiry card.

H-8 OWNERS

KEEP YOUR SYSTEM UP TO DATE WITH THESE INNOVATIVE PRODUCTS FROM CCM.

- 8088 COPROCESSOR CPU CARD —$325
- 9511 MATH CARD —$345
- 8 CHANNEL A/D CARD —$125

FOR FURTHER INFORMATION OR TO ORDER WRITE:

CCM, INC
PO BOX 2308
RESTON, VA 22091
or call
703-620-3403

MC/VISA ACCEPTED

Circle 72 on inquiry card.

Touch Tone Decoding Modem

Convert Touch Tones to ASCII. The Touch Tone Decoder Modem offers a low cost solution to remote monitoring and data entry applications. It autoanswers and connects any host computer's asynchronous RS-232 port with the telephone system. Select 300, 600, or 1200 baud data rate or optional external audio input. $500 single quantity. Touch Tone send/1200 baud receive terminal available.

the microperipheral corporation

2565 152nd Avenue NE
Redmond, WA 98052
(206) 881-7544

Circle 283 on inquiry card.

www.americanradiohistory.com

Alspa Computer, Inc.

The price-performance leader. Includes Z80A, 1 or 2 full 8" drives (double density, double sided), 3 serial and 1 parallel port, and winchester port. Prices start at less than $2000. DEALER and OEM inquiries invited.

SPECIALS on INTREGATED CIRCUITS

6502	7.45	10/ 6.95	50/ 6.55	100/ 6.15
6502A/6512A	8.40	10/ 7.95	50/ 7.35	100/ 6.90
6520 PIA	5.15	10/ 4.90	50/ 4.45	100/ 4.15
6522 VIA	6.45	10/ 6.10	50/ 5.75	100/ 5.45
6532	7.90	10/ 7.40	50/ 7.00	100/ 6.60
2114-L200		2.45	25/ 2.30	100/ 2.15
2716 EPROM		4.90	5/ 4.50	10/ 4.00
2532 EPROM		7.90	5/ 7.45	10/ 6.90
6116 2KX8 CMOS RAM		7.90	5/ 7.45	10/ 6.90
4116 RAM				8 for 14
Zero Insertion Force 24 pin Socket (Scanbe)				2.00

Anchor Automation Signalman Modems

FREE SOURCE MEMBERSHIP WITH SIGNALMAN

All Signalman Modems are Direct Connect, and include cables to connect to your computer and to the telephone. Signalman Modems provide the best price-performance values, and start at less than $100. **Dealer and OEM inquiries invited**

Mark I RS232
Mark II for Atari 850
Mark IV for CBM/PET with software
Mark V for Osborne (software available)
Mark VI for IBM Personal Computer
Mark VII Auto Dial/Auto Answer
Mark VIII Bell 212 Auto Dial/Answer

DC HAYES Smartmodem	**229**
DC Hayes Smartmodem 1200	545
RS232 MODEM — CCITT frequencies	**175**

We carry Apple II+ from Bell & Howell

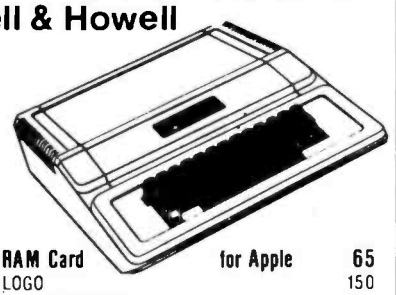

16K RAM Card	**for Apple**	**65**
Apple LOGO		150
Video Recorder Interface		545
Super Serial Card		149
Thunderclock Plus		119
Z80 Softcard and CP/M (Microsoft)		235
Parallel Printer Interface/Cable		80
Grappler Interface		139
TG Products Joystick for Apple		**48**
TG Paddles		32
DC Hayes Micromodem II		299
Videx 80 Column Card		259
Hayden Software for Apple 20% OFF		
Silentype Printer and Card		310
Graphics Tablet and Card		645
Apple PASCAL Language		195
Apple FORTRAN		160
We stock EDUWARE Software		
GENIS I Courseware Development System		145
Unicom Grade Reporting or School Inventory		250
Executive Briefing System with fonts		225
Apple Dumpling (Microtek) Printer Interface		**115**
Apple Dumpling with 16K Buffer		**160**
PIE Writer Word Processor		**120**

commodore

See us for Personal, Business, and Educational requirements. Educational Discounts available.

PETSCAN $245 base price

Allows you to connect up to 35 CBM/PET Computers to shared disk drives and printers. Completely transparent to the user. Perfect for schools or multiple word processing configurations. Base configuration supports 2 computers. Additional computer hookups $100 each.

Commodore COMMUNICATES!

COMPACK $129

Intelligent Terminal Package includes ACIA hardware based interface, DB25 Cable and STCP Software with remote telemetry, transfer to/from disk, printer output, XON-XOFF control, user program control, and status line.

VE-2 IEEE to Parallel Interface 119

Includes case, power supply, full 8-bit transmission, and switch selectable character conversion to ASCII.

VIC 20 Products		VIC Sargon II Chess	32
VIC Modem	93	VIC GORF	32
VIC RAM Cards in stock		Meteor Run (UMI)	39
VIC SuperExpander	53	Vanilla PILOT	27
VIC 16K RAM	95	Amok (UMI)	20
Thorn EMI Software		Snakman	15
HES Software		Rubik's Cube	13
VIC Omega Race	32	Programmers Reference	15
Spiders of Mars (UMI)	39	Renaissance (UMI)	39
Programmers Aid	45	VIC Adventure Series	
VICTORY Software for VIC and C64			
Street Sweepers	12	Maze in 3-D	12
Night Rider	11	Cosmic Debris	12
Treasures of Bat Cave	12	Grave Robbers Advent	11
Games Pack I	12	Games Pack II	12
Victory Casino	8	Adventure Pack I	12
Adventure Pack II	12	Trek	11

Commodore 64 Programmers Reference Guide	15
Compute!'s First Book of PET/CBM	11
POWER ROM Utilities for PET/CBM	78
WordPro 3+ - 32K CBM, disk, printer	195
WordPro 3+/64	
WordPro 4+ - 8032, disk, printer	300
SPELLMASTER spelling checker for WordPro	**170**
VISICALC for PET, ATARI, or Apple	190
PETRAX PET to Epson Graphics Software	**40**
SM-KIT enhanced PET/CBM ROM Utilities	**40**
Programmers Toolkit - PET ROM Utilities	35
PET Spacemaker II ROM Switch	36
2 Meter PET to IEEE or IEEE to IEEE Cable	40
Dust Cover for PET, CBM, 4040, or 8050	8
VIC or C64 Parallel Printer Interface	79
CmC IEEE-RS232 Printer Interface — PET	120
SADI Intelligent IEEE-RS232 or parallel	235
ZRAM - CBM 64K RAM, Z80, CP/M	550
Programming the PET/CBM (Compute!) — R. West	**20**
Compute! First Book of VIC	11
Whole PET Catalog (Midnight Gazette)	**8**
Color Chart Video Board for PET	125
PET Fun and Games (Cursor)	11

FlexFile for PET CBM, C64 $110

Database, Report Writer with Calculations, Mailing Lists

FORTH for PET full FIG model — Cargill/Riley	**$50**
Metacompiler for FORTH for independento bject code	**30**
KMMM PASCAL for PET/CBM	**85**
EARL for PET/CBM Disk-based ASSEMBLER	**65**
Super Graphics — BASIC Language Exercises	**45**

Fast machine language graphics routines for PET/CBM

RAM/ROM for PET/CBM	4K $75 8K $90

DISK SPECIALS

Scotch (3M) 5" ss/dd	10/ 2.25	50/ 2.10	100/ 2.05
Scotch (3M) 5" ds/dd	10/ 3.15	50/ 2.90	100/ 2.85
Scotch (3M) 8" ss/sd	10/ 2.40	50/ 2.20	100/ 2.15
Scotch (3M) 8" ss/dd	10/ 2.95	50/ 2.70	100/ 2.65

We stock VERBATIM DISKS

Write for Dealer and OEM prices.

BASF 5" or 8"	10/ 2.00	20/ 1.95	100/ 1.85
NEW BASF Qualimetric Disks also in stock.			
Wabash 5"ss/sd	10/ 1.80	50/ 1.75	100/ 1.70
Wabash 5" ss/dd	10/ 2.00	50/ 1.95	100/ 1.90
Wabash 8" ss/sd	10/ 2.00	50/ 1.95	100/ 1.90

We stock MAXELL DISKS

Write for dealer and OEM prices.

Disk Storage Pages	10 for $5	Hub Rings	50 for $6
Disk Library Cases	8"—3.00	5"—2.25	
Head Cleaning Kits	11		

CASSETTES—AGFA PE-611 PREMIUM

High output, low noise, 5 screw housings

C-10	10/ .61	50/ .58	100/ .50
C-30	10/ .85	50/ .82	100/ .70

SPECIALS

Zenith ZVM-121 Green Phosphor Monitor	109
VOICE BOX Speech Synthesizer (Apple or Atari)	
Many printers available (Star, Brother, OKI, etc.)	
We Stock AMDEK Monitors	
Watanabe Intelligent Plotter 1095	6-pen 1395
ISOBAR 4 Outlet Surge Supressor/Noise Filter	**49**
We stock Electrohome Monitors	
dBASE II	390
Panasonic TR-120M1P 12" Monitor (20 MHz)	149
Panasonic CT-160 Dual Mode Color Monitor	285
Franklin Computers - special system price	
Hewlett Packard Calculators available	

USI Video Monitors—Green or AMBER 20 MHz hi-res. Dealer and OEM inquiries invited

ALL BOOK and SOFTWARE PRICES DISCOUNTED

A P Products	**15% OFF**
Synertek SYM-1 Microcomputer	**SALE 189**
KTM-2/80 Synertek Video and Keyboard	349

ZENITH data systems

Z19 Video Terminal (VT-52 compatible)	695
ZT-1 Intelligent Communications Terminal	**479**
Z100 16-bit/8-bit System	**CALL**

We stock entire Zenith line.

ATARI SPECIALS

800 Computer	525	Microsoft BASIC	72
400—16K	269	**MISSILE COMMAND**	**29**
810 Disk Drive	440	**ASTEROIDS**	**29**
Thorn EMI Software		**STAR RAIDERS**	**34**
850 Interface	170	Space Invaders	29
Inside Atari DOS	18	Atari Graph. (Compute!)	11
Joysticks or Paddles	19	Caverns of Mars	33
Microtek RAM Cards		**PAC-MAN**	**36**
EduFun Software		**CENTIPEDE**	**36**
Pilot	65	First Book of Atari	11
Super Breakout	29	**Anchor Modem—Atari**	**85**
APX Software	Call	Other Atari products	Call

252 Bethlehem Pike
Colmar, PA 18915 **215-822-7727**

A B Computers

WRITE FOR CATALOG

Add $1.25 per order for shipping. We pay balance of UPS surface charges on all prepaid orders. Prices listed are on cash discount basis. Regular prices slightly higher. Prices subject to change.

www.americanradiohistory.com

IBM PERSONAL COMPUTER

64K, 2 320K DRIVES, COLOR BOARD $2,895
64K, 2 320K DRIVES, IBM DISPLAY .. $3,250



OSBORNE COMPUTER

64K, 2 DOUBLE SIDED DRIVES & SOFTWARE $1,750

PRINTERS: EPSON, OKIDATA & GEMINI ..... CALL

COMPUTER HORIZON
7341 Clairemont Mesa Blvd., Suite 106, MB 135
San Diego, CA 92111 Tel: (619) 565-0158

Circle 101 on Inquiry card.

THROUGHPUT

SEATTLE COMPUTER PRODUCTS GAZELLE
SCION MICROANGELO GRAPHICS SYSTEM
INTEGRAL DATA SYSTEMS PRINTERS
BAUCH & LOMB DMP-29 PLOTTER
ANALOG-DIGITAL & DIGITAL-ANALOG
IEEE-488 ... AND MORE
COMPLETE SYSTEMS FROM $5200

FOR THE IBM

SEATTLE COMPUTER PRODUCTS RAM+
SCION 16 COLOR 640X480 PIXELS
ANALOG-DIGITAL & DIGITAL-ANALOG
IEEE-488 ... AND MORE

WILLIAM J. CLAFF
7 ROBERTS RD., WELLESLEY, MA 02181
(617)-235-9585
ESTABLISHED 1978. SPECIALIZING IN CONSULTATION AND SYSTEMS INTEGRATION FOR ENGINEERING/SCIENTIFIC USES.

Circle 80 on Inquiry card.

Verbatim
flexible disks

Call Free **(800) 235-4137** for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.



VISA

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. In Cal. call
(800) 592-5935 or
(805) 543-1037.

Circle 331 on Inquiry card.

APPLE®
COMPATIBLE SYSTEM SALES

A W/P Package Incl:
APPLE® COMPATIBLE W/64K
RANA ELITE ONE W/CNTR
12" AMBER MONITOR
SMITH/CORONA TP—I PRINTER
WORD PROCESSING SOFT.

ON SALE $1899

AND MORE—*Savings & Selection*

Apple IIe	CALL
KayPro II	$1499
Franklin Ace 1000	$ 929
Columbia MPC	$2295
Syscom 2	$ 649
IBM P/C	On Sale
Smith-Corona TP-I	$ 559
Gemini 10 Dot Matrix	$ 329

For Complete Selection and Lowest Prices — Free Catalog

COMPUTERS and more

2420 University Ave., Suite 3, San Diego, Ca. 92104
(619) 291-1442, Telex 697120, Datamax Attn: Dept. 322

Circle 113 on Inquiry card.

Z8* SBC 8671 Basic Controller



A complete self contained control computer.

Features: Zilog Z8671 microprocessor with 2K basic interpreter. Sockets for 48K of on board user memory. 48 parallel I/O lines, RS 232 & 20MA current loop serial communications, and more . . .

Custom & Oem versions also available

$325.00 Each

*Z8 is a Trademark of Zilog Corp.

Lehmann & Associates
P.O. Box 566, Maumee, Ohio
(419) 891-0687

Circle 245 on Inquiry card.

Bargain Boards™

Best prices around on

CompuPro®

boards.

RAM 21-$766.
M-Drive/H-$998.

Call or write for additional board prices or to place orders.
Include $5.00 per board for shipping and handling.

6331 Fairmount Ave. #701
El Cerrito, Ca. 94530
(415) 524-8352

CompuPro is a registered trademark of Godbout Electronics

NEW IBM® PC SOFTWARE

ONLY $68 FOR ALL THREE!!

PERSONALPAC™: 3 menu-driven "user friendly" time savers.

BILLTIME: Program expense categories w/o programming experience. Easily add, delete, update bills. Sort several ways.

BANKBAL: Reconcile checkbook fast! Flexible and handles all types of income and expenses.

APPTCAL: Keep track of all engagements. Easily add, delete, update, and list appointments.

USE AT HOME OR AT THE OFFICE

Sold on PC DOS-formatted diskette. Send check, money order or C.O.D. to:

SEARS ELECTRONICS INC.
"time saving software designers"
Tirrell Hill, Goffstown, NH 03045
(603) 497-3074

Circle 386 on Inquiry card.

NOW!

IBM®-Quality Printing for Your Computer

Complete system with top-quality IBM Electronic typewriter is ready to plug into your computer. Or, you can convert your own IBM Electronic or Selectric®.

- IBM approved since 1978.
- For all popular computers.
- No special software required.
- Money back guarantee.

• • • MORE SUPER SPECIALS! • • •

Smith-Corona TP-1	$629	Televideo 925	$788
Teletek Systemaster	$792	Anadex DP9500A	$1388
Software, other Products	Call!	StarPrinters	Call!

Call our professionals for best service *and* price.

• We export to all countries. •

IPEX
IPEX INTERNATIONAL, INC.
5115 Douglas Fir Road
Calabasas, CA 91302 U.S.A.
Telex/TWx 910-494-2100

(213) 710-1444

IBM and SELECTRIC are trademarks of IBM Corp.

Circle 225 on Inquiry card.

ScreenGen
FULL SCREEN CONTROL

An assembler subprogram you call from your BASIC or COBOL programs to handle screen input/output as IBM mainframes do.

You just define a table/array in your program specifying screen formats, and call ScreenGen to do all the I/O for you.

- Input or display a full screen with one single command
- Use all of your CRT video attributes
- Define up to 24 function keys
- Define templates for display and input. Six standard editing templates built-in.
- Validate input while keying. Insert and delete characters to correct fields
- Tab fields forward and backward
- Superfast screen operation

Available now for

Microsoft	BASIC-80 COBOL-80	CP/M	$99
		TRS-80	$75
Dig. Research	CBASIC	Apple II*	$75
Ryan McFarland	RM/COBOL	Manual Only	$25
Radio Shack	BASIC RS/COBOL	*requires softcard	

Source code included
IBM PC available soon

INTERDATA SYSTEMS INC.
1051 Clinton St., Buffalo, N.Y. 14206
(416) 493-8675
VISA MASTERCARD

Circle 223 on Inquiry card.

www.americanradiohistory.com

wabash®

diskettes for as low as $1.39 each!

Now...Get High Quality at a Low Price
Wabash means quality products that you can depend on. For over 16 years, Wabash has been making high quality computer products. Wabash diskettes are made to provide error-free performance on your computer system. Every Wabash diskette is individually tested and is 100% certified to insure premium performance.

Why Wabash is Special
The quality of Wabash diskettes is stressed throughout the entire manufacturing process. After coating, all Wabash diskettes go through a unique burnishing process that gives each diskette a mirror-smooth appearance. Wabash then carefully applies a lubricant that is specially formulated to increase diskette life. This saves you money, since your discs may last longer. It also assists your disk drives in maintaining constant speed which can reduce read and write errors.

Special Seal...Helps Prevent Contamination
To keep out foreign particles, a unique heat seal bonds the jacket and liner together. A special thermal seal which avoids contamination from adhesives, is then used to fold and seal the jacket. This results in outstanding performance and true reliability. Wabash then packages each diskette, (except bulk pack) in a super strong and tear resistant Tyvek® evelope. The final Wabash product is then shrink-wrapped to insure cleanliness and reduce contamination during shipment.

Each Diskette is 100% Critically Tested
Since each step in the Wabash diskette manufacturing process is subject to strict quality control procedures, you can be sure Wabash diskettes will perform for you. And every Wabash diskette meets the ultra-high standards of ANSI, ECMA, IBM and ISO in addition to the many critical quality control tests performed by Wabash. Wabash does all of this testing to provide you with consistently high quality diskettes. Reliability and data integrity – that's what Wabash quality is all about.

Flexible Disc Quantity Discounts Available
Wabash diskettes are packed 10 discs to a carton and 10 cartons to a case. The economy bulk pack is packaged 100 discs to a case without envelopes or labels. Please order only in increments of 100 units for quantity 100 pricing. With the exception of bulk pack, we are also willing to accommodate your smaller orders. Quantities less than 100 units are available in increments of 10 units at a 10% surcharge. **Quantity discounts** are also available. Order 500 or more discs at the same time and deduct 1%; 1,000 or more saves you 2%; 2,000 or more saves you 3%; 5,000 or more saves you 4%; 10,000 or more saves you 5%; 25,000 or more saves you 6%; 50,000 or more saves you 7% and 100,000 or more discs earns you an 8% discount off our super low quantity 100 price. Almost all Wabash diskettes are immediately available from CE. Our warehouse facilities are equipped to help us get you the quality product you need, when you need it. If you need further assistance to find the flexible disc that's right for you, call the Wabash diskette compatibility hotline. Dial toll-free 800-323-9868 and ask for your compatibility representative. In Illinois or outside the United States dial 312-593-6363 between 9 AM to 4 PM Central Time.

SAVE ON WABASH DISKETTES

Product Description	Part #	CE quant. 100 price per disc ($)
8" SSSD IBM Compatible (128 B/S, 26 Sectors)	F111	1.99
8" Same as above, but bulk pack w/o envelope	F111B	1.79
8" SSSD Shugart Compatible, 32 Hard Sector	F31A	1.99
8" SSDD IBM Compatible (128 B/S, 26 Sectors)	F131	2.49
8" DSDD Soft Sector (Unformatted)	F14A	3.19
8" DSDD Soft Sector (256 B/S, 26 Sectors)	F144	3.19
8" DSDD Soft Sector (512 B/S, 15 Sectors)	F145	3.19
8" DSDD Soft Sector (1024 B/S, 8 Sectors)	F147	3.19
5¼" SSSD Soft Sector w/Hub Ring	M11A	1.59
5¼" Same as above, but bulk pack w/o envelope	M11AB	1.39
5¼" SSSD 10 Hard Sector w/Hub Ring	M41A	1.59
5¼" SSSD 16 Hard Sector w/Hub Ring	M51A	1.59
5¼" SSDD Lanier No-problem compatible	M51F	2.99
5¼" SSDD Soft Sector w/Hub Ring	M13A	1.89
5¼" Same as above, but bulk pack w/o envelope	M13AB	1.69
5¼" SSDD Soft Sector Flippy Disk (use both sides)	M18A	2.79
5¼" SSDD 10 Hard Sector w/Hub Ring	M43A	1.89
5¼" SSDD 16 Hard Sector w/Hub Ring	M53A	1.89
5¼" DSDD Soft Sector w/Hub Ring	M14A	2.79
5¼" DSDD 10 Hard Sector w/Hub Ring	M44A	2.79
5¼" DSDD 16 Hard Sector w/Hub Ring	M54A	2.79
5¼" SSQD Soft Sector w/Hub Ring (96 TPI)	M15A	2.69
5¼" DSQD Soft Sector w/Hub Ring (96 TPI)	M16A	3.79

SSSD = Single Sided Single Density; SSDD = Single Sided Double Density; DSDD = Double Sided Double Density; SSQD = Single Sided Quad Density; DSQD = Double Sided Quad Density; TPI = Tracks per inch.

Buy with Confidence
To get the fastest delivery from CE of your Wabash computer products, send or phone your order directly to our Computer Products Division. Be sure to calculate your price using the CE prices in this ad. Michigan residents please add 4% sales tax or supply your tax I.D. number. Written purchase orders are accepted from approved government agencies and most well rated firms at a 30% surcharge for net 30 billing. All sales are subject to availability, acceptance and verification. All sales are final. Prices, terms and specifications are subject to change without notice. All prices are in U.S. dollars. Out of stock items will be placed on backorder automatically unless CE is instructed differently. Minimum *prepaid* order $50.00. Minimum *purchase order* $200.00. International orders are invited with a $20.00 surcharge for special handling in addition to shipping charges. All shipments are F.O.B. Ann Arbor, Michigan. No COD's please. Non-certified and foreign checks require bank clearance.

For **shipping charges** add $8.00 per case or partial-case of 100 8-inch discs or $6.00 per case or partial-case of 100 5¼-inch mini-discs for U.P.S. ground shipping and handling in the continental United States.

Mail orders to: Communications Electronics, Box 1002, Ann Arbor, Michigan 48106 U.S.A. If you have a Master Card or Visa card, you may call and place a credit card order. Order toll-free in the U.S. Dial 800-521-4414. If you are outside the U.S. or in Michigan, dial 313-994-4444. Order your Wabash diskettes from Communications Electronics today.

Copyright ' 1982 Communications Electronics" Ad # 110582

MasterCard VISA MEMBER DIRECT MAIL MARKETING ASSOCIATION

Order Toll-Free!
800-521-4414
In Michigan 313-994-4444

wabash
error-free
diskettes

COMMUNICATIONS ELECTRONICS™

Computer Products Division

854 Phoenix □ Box 1002 □ Ann Arbor, Michigan 48106 U.S.A.
Call TOLL-FREE (800) 521-4414 or outside U.S.A. (313) 994-4444

Circle 86 on inquiry card.

www.americanradiohistory.com

MEMOREX
FLEXIBLE DISCS

WE WILL NOT BE UNDERSOLD!! Call Free **(800)235-4137** for prices and information. Dealer inquiries invited and C.O.D.'s accepted.

VISA



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA 93401. In Cal. call (800)592-5935 or (805)543-1037

Circle 331 on inquiry card.

SPECIAL OFFER

TURBO-MICRO COMPUTER
Complete System With Networking Capability

- 1 to 16 Independent users.
- 20 to 80 M. Byte hard disk
- CP/M or TurboDos Operating System
- 100% CP/M Compatible
- S-100 BUS Structure, master/slave concept

3.2 M. Byte Desk Top Turbo-Micro Computer, 1 to 6 users..... $2349.00
20 M. Byte Hard Disk Desk Top Turbo-Micro Computer, 1 to 6 users..... $3995.00
20 M. Byte Hard Disk Stand-Alone Turbo-Micro Computer, 1 to 16 users..... $5595.00

Write or call for complete information and price package.

ADVANCED COMP. TECH.
SAN DIEGO, CA (619) 571-2746

Circle 12 on inquiry card.

ANUDATA
COMPUTER PRODUCTS

PRINCETON GRAPHIC HIGH RESOLUTION RGB COLOR MONITOR FOR IBM-PC — CALL

TANDON FLOPPY DRIVE TM 100-2 — $255

VERBATIM DISKETTES 5 1/4" SS DD $24.50/10
DS DD $30/10

FOR INFORMATION OR ORDERS CALL

914-221-1560

OPEN 7 DAYS A WEEK

73 BRANDY LANE
WAPPINGER FALLS, NY 12590

Circle 23 on inquiry card.

OLIVETTI M-20 COMPUTERS

	SUGG. LIST	OUR PRICE
COMPUTERS		
M-20 Computer, 128k, Single Disk	$3087	$2469
M-20 Computer, 128k, Dual Disk	3682	2945
32k Memory Expansion	229	180
Color Monitor & 32k Memory	1700	1360
11Mb Internal Hard Disk	3782	3025
Eagle II Computer	2995	2595
Eagle III Computer	3995	3495
PRINTERS		
Dot Matrix Printers	— Call —	
Letter Quality Printers	— Call —	
Olivetti Thermal Graphics Printer	1100	700
Panasonic 6-Pen Plotter	1995	1596
SOFTWARE	— Call —	

CALL FOR GREAT DISCOUNTS
on all Olivetti Computers, Software, Printers, etc.

WE DEAL.

TimeSaver Systems
206/927-9024
15 Central Way, Suite 320, Kirkland, WA 98033

Circle 387 on inquiry card.

TAXMAN-83
An Interactive TAX MANagement Program for VisiCalc™ & SuperCalc™ Users

TAXMAN-83 provides you with the capability to easily calculate your 1982 taxes by using the already proven VisiCalc™ and SuperCalc™ electronic spreadsheets.
TAXMAN-83 prepares and prints 1982 individual income tax returns.
TAXMAN-83 considers all tax alternatives, computes the lowest tax possible, tests reasonableness and tells you which forms are necessary for filing.
TAXMAN-83 includes the following forms/schedules: Federal 1040; Schedules A, B, C, D, E, F, G, R, RP, SE, ES, U, W; Forms 1116, 2106, 2119, 2210, 2440, 2441, 3468, 3903, 4136, 4137, 4255, 4562, 4563, 4625, 4684, 4797, 4798, 4835, 4952, 4970, 4972, 5329, 5544, 5695, 5884, 6249, 6251, 6252, 6478, 6765, 6781; Tax schedules X, YS, YJ, Z; Tax tables; Sales tax tables for all states.
TAXMAN-83 is now available for most microcomputers utilizing VisiCalc™ or SuperCalc™

MasterCard

PRICED AT ONLY
$95.00
Call: 1-205-533-7590

VISA

aci ATSUKO COMPUTING INTERNATIONAL
303 Williams Avenue, Huntsville, AL 35801

Direct orders please add $4.00 for shipping/handling and sales tax where applicable
VisiCalc is a trademark of VisiCorp. SuperCalc is a trademark of SORCIM Corporation

Circle 37 on inquiry card.

ONE BOARD CP/M© SYSTEM FOR NETWORKS



Features:

- 8½ x 12½ inches
- 10 MHZ 8085 CPU
- 64K RAM
- 880 KBIT/SEC Network Port
- CRT Controller
- 8272 FD Controller
- Winchester Interface
- 2 RS-232 Channels

Documentation $20
CP/M Floppy Disk Op. System $180
Check or Money Order

autocontrol INCORPORATED
11400 Dorsett Rd.
Maryland Heights, MO 63043
(314) 739-0056

Circle 38 on inquiry card.

CHIPS & DALE

THE INFLATION FIGHTERS!

4116 250ns 8/$9.50 100+ 1.05 ea.
4116 200ns 8/$10.00 100+ $1.05 ea.
4116 150ns 8/$11.50 100+ $1.25 ea.
4116 120ns 8/$14.50 100+ $1.50 ea.
4116 120ns 8/$15.50 100+ $1.50 ea.
2114L 300ns 8/$10.50
2114L 200ns 8/$12.00
*4164 200ns $4.65 ea.
*4164 150ns $5.10 ea.
*6116 150ns $4.00 ea.
*6116 200ns $3.85 ea.
*6116LP 150ns $4.75 ea.
*1791 Disk Controller $20.00
1777 Disk Controller $17.50
Z80A, Z80ACTC, Z80A PIO $3.00 ea.
8255 $4.25
2716-1 5V 350ns 8/$4.25 ea. $5.00 ea.
2716 5V 450ns $3.00 ea.
*2732 5v 450ns $3.85 ea.
*2532 5V 450ns $4.25 ea.
*2764 5V 300ns 28 pin $9.00 ea.
*2764 5V 24 pin CALL
*2564 5V CALL
**8087 CALL
68000 CALL

Allow up to 3 wks. for personal checks to clear. Please include phone number. Prices subject to change without notice. Shipping & Handling for Chips $3.50, FOB Bellevue, WA. for all else. Wash. residents add 6.5% Sales Tax.

CHIPS & DALE 1-206-451-9770
10655 N.E. 4th St., Suite 400
Bellevue, WA 98004

Circle 78 on inquiry card.

C LANGUAGE PROGRAMMERS

c-systems
C COMPILER

Now with: **c-window™**

The **first** c language **source level** program testing and debugging tool.

- Single step by c source line.
- Set breakpoints at line numbers.
- Display and alter variables by symbol name, using c expression syntax.
- No more printf or assembler level debugging!

c-window™ is a support package for the **c-systems C COMPILER** for 8086/8088 based systems.

Contact:
c-systems
P.O. Box 3253
Fullerton, CA 92634
714-637-5362

COMPUTERLAND

TM c-systems

Circle 67 on inquiry card.

Maxell Diskettes

The floppy disks that meet or exceed every standard of quality. Dealer inquiries invited.

Call Toll Free
1-800-237-8931.
In Florida, call
813-577-2794.

Tech•Data Corporation
3251 Tech Drive North
St. Petersburg, FL 33702

Circle 419 on inquiry card.

www.americanradiohistory.com

DRIVES

IBM • APPLE II • APPLE III

QUENTIN
OR
MICRO-SCI

APPLE II 5 1/4" **$269.00**

OKIDATA

82A	83A	84	93

CALL FOR LOWEST PRICES

BASIS 108

APPLE COMPATIBLE COMPUTER
CALL FOR LOWEST PRICE

EPSON

MX80	FX80	MX100

CALL FOR LOWEST PRICES

SMITH-CORONA TP-I

LETTER QUALITY DAISY WHEEL
$575.00

SOFTWARE

WE HAVE IT ALL!
OVER 500 TITLES

IBM • APPLE • CP/M
PARTIAL LISTING

ARCADE MACHINE	$31.00
BEAGLE BROS.	$CALL
BPI GL. AP. AR	299.00
BRODERBUND	$CALL
DATAMOST	$CALL
EDU-WARE	$CALL
FROGGER	30.00
HAYDEN PIE WRITER	119.00
HOME ACCOUNTANT	59.00
HOME ACC'T + (IBM)	119.00
INFO. UNLIMITED	$CALL
MICROPRO	$CALL
MICROSOFT	$CALL
MULTIPLAN (CP/M, IBM)	199.00
PEACHTREE	$CALL
PERFECT SOFTWARE	$CALL
PFS	$CALL
SCREENWRITER II	99.00
SIRIUS	$CALL
SUPERCALC	215.00
TRANSEND	119.00
WIZARDRY	35.00
WORDHANDLER II	139.00
ZORK I, II, III	27.00

HARDWARE

WE CARRY MOST PRODUCTS. PLEASE CALL IF NOT LISTED

PARTIAL LISTING

DISK LIBRARY CASE	2.50
FLIP FILE	20.00
GRAPPLER +	139.00
HAYES MICROMODEM II	269.00
JOYPORT	49.00
KRAFT JOYSTICK	47.00
M & R ENTERPRISES	$CALL
MX-80 PRINTER STAND	19.00
MX-PLUS	45.00
MICROBUFFER II 32K	239.00
MICRO-SCI DRIVES	$CALL
MICROSOFT IBM RAMCD	299.00
MICROSOFT SOFTCARD	239.00
NOVATION PRODUCTS	$CALL
PAYMAR L/CASE, REV.7	20.00
PKASO	159.00
PRACTICAL PERIPHERALS	$CALL
SHIFT KEY MODIFICATION	12.00
VISTA PRODUCTS	$CALL
WILDCARD	119.00
WIZARD BPO	159.00

VISICORP

IBM-APPLE II- APPLE III

Visilink (Apple)	179.00
Visicalc (IBM or Apple)	179.00
Desktop Plan II (Apple)	179.00
Desktop Plan (IBM)	249.00
Visidex (IBM or Apple)	179.00
Visifile (Apple)	179.00
Visifile (IBM)	249.00
Visiplot (Apple)	145.00
Visischedule (Apple)	229.00
Visiterm (Apple)	75.00
Visitrend/Plot (Apple)	229.00

Mountain Computer

CPS Card	159.00
CPS Cable	$CALL
Ramplus+32K	145.00
Rom Writer	145.00
Clock	195.00
Music System	299.00
Super Talker	149.00
Expansion Chassis	559.00
Card Reader	$CALL
A/D-D/A	269.00
Visicalc Expander	$CALL

16 RAM CARD

Compatible with:
DOS 3.3, CP/M,
Visicalc, PASCAL
2 YR. WARRANTY **$59.00**

SATURN SYSTEMS

64K	$319.00
128K	459.00
V-C Expand 80	99.00

Legend Industries

64K (Includes V-C plus)	$299.00
128K (Inc. Videx V-CALC 80 w/mem exp.)	479.00
Pascal Super Systems	$CALL

Verbatim

5 1/4" (100)	$239.95
5 1/4" (10)	25.95
8" (10)	39.95
Head Cleaning Kit	7.50

KENSINGTON MICROWARE



SYSTEM SAVER

- Surge Suppression
- Dual Outlet
- U.L. Listed
- Fits Apple Stand

$65

TG Products

Paddles	$29.00
Joystick II	40.00
Select-A-Port	47.00
All of Above	109.00
Trakball	$CALL
Joystick III	$CALL
Joystick IBM	45.00

MONITORS

BMC 12" Green Au	88.00
BMC 12" Green Eu	129.00
USI PI3-12" Amber	169.00
USI PI4-9" Amber	159.00
NEC 12" Green	179.00
NEC 12" Color	349.00
AMDEK	$CALL
SANYO	$CALL

Videx

80 Column	$239.00
Enhancer II	119.00
Softswitch	25.00
Function Strip	59.00
Inverse Video	19.00
Applewriter Pre-Boot	19.00
Visicalc 80 Software	49.00
Visicalc 80 w/mem. exp.	74.00

EPSON RIBBONS

MX 80 — $ 7.00 ea or 3 for 20.00
MX 100 — 11.00 ea or 3 for 32.00

DEALER INQUIRIES INVITED

COMPUTER DISCOUNT PRODUCTS

MAIL ORDERS & RETAIL STORE
860 S. Winchester Blvd.
San Jose, CA 95128

(408) 985-0400

HOURS: MON-FRI 8AM - 7PM - SAT & SUN 10AM - 4PM

PRICES SUBJECT TO CHANGE - ALL ORDERS FOB SAN JOSE

Circle 97 on Inquiry card.

www.americanradiohistory.com

PARALLEL INTERFACE PROBLEM?

PRINTER OR COMPUTER?
The Detectabyte® Model BD-1

- Connects To Computer Parallel Output Port (36 Pin Connector)
- Indicates If Preselected Character Was Sent
- Complete With Power Supply And LED Display
- Scope Sync Output
- Minimizes Repair Costs & Turnaround Time

Price $169.50 Plus $3.00 Shipping
(California Orders Add 6% Sales Tax)

The Partran Company
2520 S. Fairview Avenue, Suite F
Santa Ana, CA 92704
(714) 662-0709

Circle 340 on Inquiry card.

$99 TAX

"IRIS" IS LESS TAXING TO USE

1983 Returns on 1982 Income. Listable. Asks for Numbers, Yes/No Answers Gives HELP. Picks, does forms itself. 5¼" Disks (2) for CP/M™, MICROSOFT™ BASIC. Copyable for 10 users. Under $10 each.

$99-PERSONAL-IRIS 1040/A,B,D,G,W common statements and forms, credits,+

NO EXTRA COST-adds C,E,F,R,SE,ES more forms,credits,+

Future update discounted to original Buyers. Return mail delivery with bank, Certified check, MASTERCARD, VISA. CP/M-Registered Trademark of Digital Research Microsoft-Reg. Trademark of Microsoft Corp.

D.C. POSTAGE, INC., 1309 4th St. SW
Washington DC 20024
202-484-1535 (messages only)

Circle 134 on Inquiry card.

SPECIAL OFFER!

MEGARAM

IBM PERSONAL COMPUTER MEMORY EXPANSION BOARD

FEATURES:
Expansion capability from 64K to M-Byte, Memory boundaries selection flexibility, Programmable memory banking capability, Programmable memory write protect, Dual RS-232-C serial asynchronous ports, Programmable RS-232-C address, "Key-lock" software protection logic, High quality four layer PC board, One year warranty.

SPECIAL PRICE:
64K RAM & two RS-232 serial ports— $299.95
256K RAM & two RS-232 serial ports— $499.95

MBI Microcomputer Business International (714) 553-0133 (619) 727-0202

P.O. Box 16115, Irvine CA 92713-6115

Circle 168 on Inquiry card.

WORD PROCESSING — PLUS SPELLBINDER

A Word Processor for CP/M and MS-DOS Systems, with built-in mail list, sorts by zips, alpha and cues, forms generator, column addition and more.

LIST	*PLAN-A*	*PLAN-B*	*PLAN-C*
$495	$356	$321	$285

Other CP/M, MS-DOS and Apple software available with same terms. Write or call for full spec sheets or further information.

PLANS:
A - Phone support, exchange privilege, 90 days
B - Phone support, exchange privilege, 30 days
C - Support limited to supplied documentation, no exchange except for bad disk replacement.

Additional support available at $20/hour.

TERMS:
Prices include cash discount. Add 4% for charge or COD orders. Add $5 shipping and handling.

Suite 14-04
3322 Mem.
Pkwy., S.W.

daman

(205) 883-8113
Hunstville,
AL 35801

Circle 135 on Inquiry card.

ATR8000: THE DOUBLE DENSITY DISK INTERFACE FOR ATARI 800/400

- Z80 4MHz controller with 64k RAM.
- Comes with CP/M 2.2. Also runs ATARI DOS and OS/A+.
- Runs four 5¼" or 8" drives.
- Has a serial and a parallel port.
- * CO-POWER-88, and 8088 co-processor with up to 256k RAM is now available. Runs CP/M-86 or MSDOS.

64k ATR8000	$750.00
5¼" Drive	$399.95
OS/A+, Vers. 4	$ 49.95
CO-POWER-88	Choose from several packages. Call for pricing.



SOFTWARE PUBLISHERS, INC.
2500 E. Randol Mill Rd., Suite 125
Arlington, TX 76011
(817) 469-1181

Circle 398 on Inquiry card.

Cables
EIA RS 232-C

Quality cables with immediate delivery and low prices.

Conductor	Price
1-4	$12.00 + .18/ft.
5-7	12.50 + .27/ft.
8-12	13.50 + .33/ft.
13-16	14.75 + .44/ft.
17-25	17.00 + .55/ft.

Specify: Male or female connectors, length of cable and pins to be connected. OEM & quantity discounts available to qualified customers. *On prepaid orders add $5.00 for shipping/handling.*

We also supply connector parts, bulk cable, IBM, DEC Compatable & Centronic cables.

Communication Cable Company
319 Louella Ave. Wayne, PA 19087
215-964-9404

Circle 85 on Inquiry card.

I WILL BEAT ANY COMPETITOR'S PRICE PROVIDED IT IS NOT BELOW MY COST. TRY TO BEAT THESE IC PRICES:

DYNAMIC RAM		
64K	200 ns	$4.85
64K	150 ns	5.10
16K	200 ns	1.25
EPROM		
2764	300 ns	$8.00
2732	450 ns	4.15
2716	450 ns	3.33
2532	450 ns	4.70
STATIC RAM		
6116P-3	150 ns	$4.40
2016	100 ns	4.00
2114	200 ns	1.60
Z80A FAMILY		
CPU, CTC, or PIO		$3.39
DART		8.25
DMA or SIO/0		12.50

MasterCard VISA or UPS CASH COD
Factory New, Prime Parts

MICROPROCESSORS UNLIMITED
24,000 South Peoria Ave.
BEGGS, OK 74421
(918) 267-4961

Prices subject to change. Call for volume prices. Subject to available quantities. Shipping & Insurance extra. Cash discount prices shown.

Jan 20, 1983

Circle 284 on Inquiry card.

NEW



Z8 PROGRAMMABLE LOGIC CONTROLLER

16K Static Memory (6116)/(2716)
9 Parallel Ports (3-8255A)

Bare Board	$50.00
Kit	$224.00
A. & T.	$274.00

To Order: **(313) 425-1137**

MICROADE
29554 Rosslyn
Garden City, MI 48135

Circle 268 on Inquiry card.

SAVE 50% on Scotch® Diskettes

Dealer Inquiries Invited

5¼" Specify Soft 10 or 16 Sector — prices/10

744D	1 side/dbl dens	$22.30
745	2 sides/dbl dens	$31.00
746	1 side/quad 96 tpi	$33.80
747	2 sides/quad 96 tpi	$45.50

8" Specify Soft or 32 Sector

740	1 side sgl/dens	$23.60
741	1 side/dbl dens	$29.00
743	2 sides/dbl dens	$37.80

Checks-VISA-MC-C.O.D./Add $2 Shipping
Call or write for our complete list.

LYBEN COMPUTER SYSTEMS
27204 Harper Ave., St. Clair Shores, MI 48081
Phone: (313) 777-7780

Authorized Distributor
Information Processing Products 3M

Circle 251 on Inquiry card.

www.americanradiohistory.com

SIEMENS 1 MEGABYTE

8" Double Sided/Double Density

1-$299.00 ea.*

2-$289.00* 10-$269.00*

FDD200-8 Floppy
Disk Drive
Shugart Compatible

Shipping Wgt. 15 lbs.
Factory New and Packaged

Fully Guaranteed • 90 Day Warranty
Service Contracts Available • Full Documentation

We've been wholesalers to the industry for 10 years, but when these 2 items became available at the same time, we decided to offer them directly to you. We know it will prove to be a good relationship and we'll be back next month with more incredible bargains. Hope to hear from you soon.
Sincerely,
Sam DeNisi

Circle 478 on inquiry card.

*Orders accepted by Visa/MasterCharge (add 3%) Money Order or certified check. Price does not include shipping charges. Specify method of shipment desired and include approximate shipping charge. N.J. residents add 6% sales tax.

QUME 55CPS—HIGH SPEED

DAISEY WHEEL LETTER QUALITY PRINTERS

$950.00 ea.*

Quantity Pricing Available

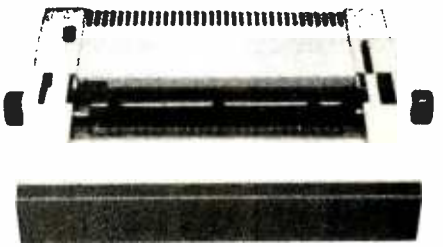

Proportional Spacing
2K Buffer
RS-232 or
Centronics Parallel

Shipping Wgt. 46 lbs.

The Qume Sprint 3-55 with Interface is Compatible with most Computers having RS-232 or Centronics Parallel A or B, such as Radio Shack, Apple, IBM, etc. Also works with most popular word processing programs like Micropro™ Wordstar.
These Qume Printers were used by a major typesetting company under maintenance until replaced by laser printers on an exchange basis. We had their technicians refurbish and completely exercise them to give you many years of reliable service at a price you can live with.

HOBB-Y-TRONIX, INC.

Division of Tope Industries, Inc.
951 Ball Ave., Union, N.J. 07083
(201) 687-1330

Best Price • Good Quality • Swift Delivery • Export

COMPUTER

		$
	The Best Graphic Personal Computer	
LNW 80 I	Z80A, 65K, 480 x 192	1,250
II	WCP/M board	1,500
	Multiuser Business/Engineer	
CROMEMCO	Best Price Anywhere	
CS1	6¼" floppy, Z80	3,196
CS1H	W/5 MB hard disk	6,596
CS1D2E	256K RAM, 68000 & Z80 two 6¼" floppy	4,396
CS1D2	no error correction	3,996
CS3D5E	512K RAM, 6800 & Z80 two 8" floppy	7,996
C10	64K, 12" monitor Z80A, keyboard	1,090
	Professional/Word Process	
ZENITH	Z90-80, 64K	2,050
NORTH STAR	HORIZON, 1 quad drive, HD5	3,999
	ADVANTAGE, 2 quad drives, 64K	2,999
CROMEMCO CIO	64K, 12" monitor, 390K floppy, letter quality printer. CP/M type O.S. + word processing + spreadsheet	2,750
	Zenith 16-Bit	
Z-110	dual drives, 128K RAM color board, 225 x 640 graphic, IBM PC compatible	3,099
ZVM-134	superb color monitor	550
	16-bit CPU	
WICAT	256K RAM, CRT, 2 floppies	7,520
68000	S150 WS 1-user	9,250
	256K RAM, 10MB hard disk, 960KB floppy CRT, OS + 1 language	
	S150-3 WS 3-users	10,800
	same as S150 WS	
	S150-6 WS 6-users	12,800
	512K RAM same as S150 WS	
	Graphics 300 x 400	900
DUAL	68000, 512K RAM, 20MB hard disk, IBM floppy, UNIX, S100	14,500
ALTOS	ACS8600-12 500K RAM 20MB hard disk	8,750
	Business System Software	1,995
TERAK, SWTPC, DEC, NEC		Call

PRINTER

		$
EPSON	FX new product	CALL
Integral Data System		
MICROPRISM	75 cps excellent print/110 cps 84 x 84 graphic, RS232/parallel pin & friction feed	526
PRISM 80	200 cps, 80 col.	945
	w/graphics 84 x 84	1,025
PRISM 132	200 cps, 132 col	1,100
	w/graphics 84 x 84	1,180
	graphic, color, friction	1,590
TI	810 Superb	CALL
OKIDATA	MICROLINE 84 parallel	1,025
PRINTEK 920	340cps, 144 x 144	2,450
	Letter Quality	
C.ITOH	Starwriter F-10 40 cps	1,395
QUME	9/45	1,840
DIABLO	620	1,288
BROTHER	HR-1 Parallel	950
NEC	7710	2,299
	3510	1,520

TERMINAL

		$
ZENITH	Z29 smart terminal	665
	ZT-1 w/modem telecom	560
HAZELTINE	ESPRIT II	588
	III	788
BEEHIVE	DM5 A	995
IBM	3101-10	1,295
TELEVIDEO	970	1,119
VISUAL	300	948

MONITOR

		$
ZENITH	12" green	114
AMDEK	COLOR IV 720 x 400	1,050
	COLOR II RGB 13"	725
	COLOR I 13"	340
	300 G 12" green	169
SANYO	13" RGB	800
NEC	12" green	170
	1203 RGB	725
Electrohome	RGB 580 x 235	599

MODEM

		$
D.C. Hayes Smartmodem	300 baud	230
	300/1200 baud	570
Novation	CAT 300 baud	155
	1200 baud	590

IBM PC

		$
AMDEK	310 monitor	189
IDS	Microprism 480	525
EPSON	FX	CALL
NEC	3550 letter quality	1,918
C.ITOH	F-10 40cps	1,395
Microsoft	128K RAM	360
EASY WRITER II	IUS	256
CP AIDS	Master Tax	1,195
LEGAL TIMEKEEPING	STAR	725
Digital Research	Pascal MT + 86	310
	Concurrent CP/M 86	299
Peachtree	GL, AR, AP	330
Structured Systems	Accounting	700

DIGITIZER/PLOTTER

HOUSTON INSTRUMENT	DMP29	CALL
HI PAD	DIGITIZER DT-11 11" x 11"	725
AMDEK	AMPLOT 11" x 14"	780

DISK DRIVE

Mitsubishi	8" DD, DS bare	410
	dual 8" subsystem	1,099
Tandon	5¼" DD, DS bare	280

SOFTWARE

dBASE II	Ashton-Tate database	499
CONDOR II		450
MICROSOFT	BASIC 80	285
Micro Pro	WORDSTAR	360
	MAILMERG	105
Digital Research	CPM 2.2	139
Accounting Plus	System Plus	399

CALL (212) 937-6363

free catalogue

Prices subject to change. American Express, Visa/Mastercard add 3%. F.O.B. point of shipment. 20% re-stocking fee for returned merchandise. Personal checks take 3 weeks to clear. COD on certified check only. N.Y. residents add sales tax. Manufacturers' warranty only. International customers, please confirm price before order. Accept P.O. from Fortune 500 & schools.

Computer Channel
21-55 44th Road
Long Island City, NY 11101

TELEX:
429418
CSTNY

Computer Channel

Circle 96 on inquiry card.

www.americanradiohistory.com

Circle 95 on Inquiry card.

TRUE MAIL ORDER PRICES

With so many so-called Mail Order establishments using "toll free" lines, and grandiose advertising, how can you, the customer, expect to receive true mail order savings? We have done away with large ads, and free phone lines to offer comparable service passing on the savings to you.

THINK! You still SEND YOUR MONEY in the mail to an unknown untested party, and delivery is still often doubtful and certainly protracted in most cases.

PRINTERS

OKIDATA

80 no tractor	$ 319
80 with tractor	$ 369
82A no tractor	$ 419
82A with tractor	$ 459
83A	$ 669
84A parallel	$1009
84A senal	$1119
2K Buffer	$ 50
Graphics 82A, 83A	$ 73

C-ITOH SPECIAL

Comet II (125 cps) Full 15" width text printer	$ 499

C-ITOH PRINTERS

80 col. parallel printer	$ 449
80 col. serial printer	$ 589
132 col. parallel printer	$ 679
132 col. serial printer	$ 729
Prac. Peripheral 8K Serial Buffer with X on/off Epson	$ 111
Graphics Prowriter (120 cps)	$ 444

STAR PRINTERS

Gemini 10 and 15	Call for Pricing

LETTER QUALITY

serial or parallel

C-ITOH F10	$1345
Brother HRI	$ 849
Smith Corona TPI	$ 569

PRINTER CONNECTORS

TRS-80 Cables only	$ 22
Apple Int. & Cable	$ 79
Atari-printer Cable	$ 24
IBM PC-printer Cable	$ 24
Male Centronics-printer Cable	$ 24
RS232 male-male	$ 19

"Configured for any computer, please specify your computer"

IDS Cable	$ 33
Apple Graphics Card with Cable to Epson/NEC/C-ITOH	$ 89

MONITORS

Zenith ZVM-121 Green	$ 90
TECO ED 1200 line Hires Green	$111
NEC Anti Glare Green	$155
AMDEK 300G	$155
AMDEK Color I	$333
AMDEK Color II (IBM Available)	$699

IBM

Monte Carlo Card 64K	$ 399
I-C Magic	$ 69

VERBATIM

5¼" SS SD	$22.50
5¼" SS/DD	$24.00
5¼" DS/DD	$35.00
8" DS/DD	$39.00
8" SS/DD	$35.00

Available in soft sector and hard sector 10-16

IBM/APPLE DRIVES

* Tandon TM S-100-1	$202
TM S-100-2	$265
TM S-100-4	$383
* Software patch for IBM	$ 66
* RANA Elite 1 Add on Drive	$333
Quad drive Apple controller	$ 99
For Elite 2/3/4 write for price availability	$ 99
* DAVONG (Apple and IBM) 5 MB	$1525
10 MB	$2025
15 MB	$2245

NEC PERSONAL COMPUTER

PC-8001	$699
PC-8012	$459
PC-8031	$699

COMING!—NEW NEC-APC

GENERIC DISKETTES

5¼" SS/SD in plastic library case	$21

Library Cases Alone

5¼"	$ 2.50
8"	$ 3.50

MODEMS

Hayes Smart Modem	$212
Hayes Micro Modem	$259
Hayes Chronograph	$179
Apple - Cat II	$279
IBM - Smart Modem Cables	$ 22

RAM CARDS

Apple 16K Card	$ 66
32K Card	$125
IBM 64K Quad Board	$375
Apple Vista Vision 80	$242

Send orders and inquiries to:

Computer Apparatus™

P.O. Box 32063 • Aurora, CO 80041

TELEPHONE ORDER INQUIRIES:
(303) 759-9251
10 a.m. to 2 p.m. Mountain Time. Monday to Friday.

We have access to a vast range of computer products from the many stocking distributors in Denver. We cater for a range of brand name peripherals and software for TRS-80, Apple, IBM, Atari and CP/M users. SEND in a card stating your interests for our free catalog.

DELIVERIES: 4-6 weeks at worst, all orders are fully dated. (Includes mail and shipping time).
PERSONAL CHECKS: OKAY, but cashiers checks, money orders, etc., will receive shipping preference
VISA AND MASTERCARD: Add 4% to total we CHARGE only WHEN we SHIP.
CATALOG: Descriptions/charts/pricing and availability on all our products. Prices subject to change without notice
SHIPPING: VIA UPS add $2.00 plus 1% of order total.

Please Circle Inquiry Card to Receive Our Comprehensive Catalog

---

DISK DRIVE For APPLE!!
→ metal cabinet
→ 35 track
→ w/cable
☆☆ $279.95

Computer Games:
APPLE & ATARI (specify)
Choplifter
Frogger
→ $24.95ea.
Apple Panic
Crossfire
Raster Blaster
→ $21.95ea.

SUPER 3.5amp POWER SUPPLY
for APPLE → $105.00 ☆

Diskette Storage BOX
5¼ in. $2.50ea. > 5/$10.00 : 8 in. $3.50 > 5/$15.00

Bare Bones APPLE II EURO
w/o Keyboard =48K RAM= w/o Pwr. Supply
$399.

Microswitch Keyboard	Power Supply w/ Purchase	APPLE Reference Manl.
$ 75.00	$ 95.00	$18.00

★SPECIALS★

3inch Mini FAN	$8.95
2111	$2.45
8155	$11.50
ER2501	$4.95
AY5 1013A	$2.95
8202	$29.95
6522	$5.25
8255	$4.50
8748-8	$31.00
MC6800	$7.75
MC6802	$14.95
MC6850	$4.50
MC6821	$4.95
6331	$1.25
4116-2	8/9.95
2716(5v)	3.25ea
2732(5v)	5.25ea
2532(5v)	8.75ea.
Z80 A CPU	5.25ea.
1982 I.C. (2vol.)	Master $49.95

CONCORD COMPUTER PRODUCTS

2910 B E. LA PALMA
ANAHEIM CA 92806
(714) 632-6790
10 MIN ORDER CARES ADD 6 Freight
$10-49 → $2.00 | $250-499 → $9.00 | send $100 for catalog
50-99 → 4.00 | 500-999 → 11.00
100-240 → 8.00 | 1000-UP → Call
ALLOW 2 WKS DEL. IF PERSONAL CHECK IS SENT
CHECK-M/O NO COD

MONITORS ☆☆

ZENITH # ZVM-121
12in. 15MHz./GREEN Phos.
→ $102.00☆

BMC # BM-1200SU
12in. 18MHz./GREEN Phos.
Non-Glare Screen
→ $128.00☆

BMC # BM1401RGB
13in. "RGB" COLOR
with Apple interface!!
→ $425.00☆

Diskette SALE!!
Call for Qty. Price "Wabash"

soft	5¼	8inch
SS/SD	18.50	21.50
SS/DD	27.40	30.40
DS/SD	ø	34.90
DS/DD	32.40	37.40

REAL-TIME CLOCK CALENDAR (MSM 5832)
$6.25 / $1.25 xtal.

Syntron II Computer
★ 48K RAM
★ Runs Apple Software
$649.00

COMPONENTS

74LS00 .24 74LS02 .24 74LS03 .24 74LS04 .24 74LS05 .24 74LS08 .26 74LS10 .24 74LS11 .33 74LS12 .33 74LS13 .65 74LS14 .89 74LS20 .24 74LS21 .24 74LS26 .30 74LS27 .28 74LS28 .32 74LS30 .24 74LS32 .32 74LS37 .50 74LS38 .32 74LS42 .50 74LS48 .70 74LS51 .24 74LS55 .35 74LS74 .35 74LS75 .48 74LS83 .70 74LS86 .38 74LS90 .60 74LS92 .65 74LS93 .60 74LS95 .80 74LS107 .38 74LS109 .38 74LS112 .40 74LS113 .40 74LS114 .45 74LS122 .40 74LS123 .80 74LS125 .80 74LS126 .85 74LS132 .70 74LS136 .50 74LS138 .65 74LS139 .65 74LS145 1.10 74LS151 .70 74LS153 .70 74LS157 .70 74LS158 .70 74LS161 .85 74LS162 .85 74LS163 .85 74LS164 .85 74LS165 .85 74LS169 1.55 74LS170 1.55 74LS174 .85 74LS175 .85 74LS190 .90 74LS191 .90 74LS221 1.10 74LS240 .95 74LS241 .95 74LS244 .85 74LS245 1.65 74LS248 1.00 74LS249 .95 74LS251 1.20 74LS253 .80 74LS257 .80 74LS258 .80 74LS259 1.25 74LS260 .60 74LS273 1.50 74LS275 3.00 74LS279 .50 74LS283 .75 74LS373 .90 74LS374 1.50 74LS377 1.40

7400 SERIES

7400	16	7454	19	74S00	35
7402	18	7470	30	74S02	38
7404	18	7472	45	74S03	38
7405	21	7474	40	74S04	45
7408	23	7475	40	74S05	65
7409	18	7478	80	74S08	40
7410	18	7480	55	74S10	55
7411	22	7481	1.00	74S15	55
7412	28	7486	3.00	74S20	55
7413	32	7490	50	74S22	75
7414	45	7491	55	74S30	35
7416	24	7492	55	74S37	1.25
7417	24	7494	60	74S51	60
7420	18	7495	50	74S65	95
7421	30	74100	90	74S74	55
7425	22	74107	25	74S85	2.00
7427	25	74122	40	74S86	1.10
7430	16	74123	40	74S112	1.45
7432	25	74144	2.50	74S132	1.10
7438	25	74145	70	74S138	95
7440	18	74148	1.00	74S140	1.25
7442	45	74154	1.00	74S158	1.25
7443	60	74157	45	74S174	95
7444	60	74160	60	74S175	95
7445	60	74161	60	74S181	4.00
7446	60	74163	80	74S182	2.75
7447	60	74166	1.00	74S188	3.50
7448	60	74174	80	74S240	3.50
7450	16	74181	1.95	74S244	3.50
7451	18	74393	1.00	74S471	9.50
7453	19			74S472	15.00

STATIC RAMS

2111		2.85	8/2.50ea
2112		2.85	8/2.50ea
2114		2.00	8/14.00
2114L	200NS	2.25	4/2.00ea
HM6116	150NS	8.25	

DYNAMIC RAMS

4027	2.00	8/1.75ea
4116 200ns	1.50	
4164 200ns	7.95	

MISC

8126	1.20	1702	4.25 8/3.95ea
8128	1.20	2708	3.25 8/2.99ea
8038	2.75	2716(5V)	3.95 8/3.65ea
8080A	3.75	TMS2716	8.95 8/8.00ea
8155	10.50	2732(5V)	8.95 8/7.75ea
8255	4.50	TMS2532	11.50 8/10.25ea
MC1330	1.45		
MC1350	1.10		
MC1358	1.35		
MC1458	.55		
LM380	1.10		
LM386	1.40		
LM565	.95		
LM741	.25		
LM1310	2.90		

EPROMS

VOLTAGE REGULATORS
7805
7806
7808
7812
7818
7905
7908
7912
7918

MORE MISC

8212	1.95		
8216	1.80		
1103A	.95		
N82S185	8.95	Z80	8.50
AY5 1013A	3.00	Z80A	6.00
1488	.95	Z80A PIO	6.00
1489	.95	6502	6.00
MC6802	9.95	6502A	12.00
MC6821P	4.95	8085A	8.50
MC6850P	3.25	MC6800	7.75

CPUS

Circle 116 on Inquiry card.

www.americanradiohistory.com

IBM PC Accessories

ADD ON DISK DRIVE for IBM PC- Tandon

Single sided or double sided, double density disk drives for IBM PC. these are exactly the same disk drives used by IBM at half the price

MSM-551001 *TM100-1 single sided* _____ $219.95
MSM-551002 *TM100-2 double sided* _____ $294.95

SERIAL I/O for IBM PC - Profit Systems

Two asynchronous serial RS-232C I/O ports, real time clock-calender, includes software

IOI-8100A *Card with 1 port* _____ $159.95
IOI-8101A *Card with 2 ports* _____ $199.95

SERIAL/PARALLEL for IBM PC - Profit Sys

Two asynchronous serial RS-232C I/O ports. one parallel printer I/O port, real time clock-calender, includes software

IOI-8110A *1 serial & 1 parallel* _____ $199.95
IOI-8111A *2 serial & 1 parallel* _____ $229.95

EXTENDER CARD for IBM PC - Profit System

All bus signals extended, signal names silk screened on top of board, gold-plated card edge, low noise

TSX-300A *IBM PC extender* _____ $45.00

PROTOTYPING CARD for PC - Profit Systems

Highly versatile wire-wrap or solder prototyping board for your IBM PC. large bread board area, power and ground planes to reduce noise, all holes are plated through, card is solder masked on both sides. all signals names are silk screened on both sides

TSX-310A _____ $59.95

Video Monitors

HI-RES 12" GREEN SCREEN - Zenith

15 MHz bandwith 700 lines/inch, P31 green phosphor, switchable 40 or 80 columns, small, light-weight & portable.

VDM-201201 *List price $189.95* _____ $115.95

HI-RES GREEN MONITORS - NEC

20 MHz bandwidth, P31 phosphor ultra-high resolution video monitor, high quality, extremely reliable.

VDM-651200 *Deluxe 12"* _____ $199.95
VDM-651260 *Economy 12"* _____ $149.95
VDM-65092 *Deluxe 9"* _____ $179.95

12" COLOR MONITORS - Taxan

18 MHz high resolution RGB color monitors fully compatible with Apple II and IBM PC, unlimited colors available.

VDC-821210 *RGBvision I, 380 lines* _____ $389.95
VCD-821230 *RGBvision III, 630 lines* _____ $689.95
VDA-821200 *RGB card for Apple II* _____ $99.95

COLOR MONITORS - Amdek

Reasonably priced color video monitors.

VDC-80130 *13" Color I* _____ $379.95
VDC-801320 *13" Color II* _____ $894.95
IOV-2300A *DVM board for Apple* _____ $199.95

AMBER or GREEN MONITORS - USI

High resolution 18 MHz compact video monitors.

VDM-751210 *12" Amber phosphor* _____ $149.95
VDM-751220 *12" Green phosphor* _____ $139.95
VDM-750910 *9" Amber phosphor* _____ $149.95
VDM-750920 *9" Green phosphor* _____ $139.95

Single Board Computer

SUPERQUAD - Adv. Micro Digital

Single board, standard size S-100 computer system, 4 MHz Z-80A. single or double density disk controller for 5¼" or 8" drives. 64K RAM, extended addressing, up to 4K of EPROM, 2 serial & 2 parallel I/O ports, real time interrupt clock, CP/M compatible.

CPC-30800A *A & T* _____ $724.95
IOX-4232A *Serial I/O adapter* _____ $29.95

Dual Disk Sub-Systems

Disk Sub-Systems - Jade

Handsome metal cabinet with proportionally balanced air flow system, rugged dual drive power supply, power cable kit, power switch, line cord, fuse holder, cooling fan, never-mar rubber feet, all necessary hardware to mount 2-8" disk drives. power supply, and fan, does not include signal cable.

Dual 8" Sub-Assembly Cabinet

END-000420 *Bare cabinet* _____ $49.95
END-000421 *Cabinet kit* _____ $199.95
END-000431 *A & T* _____ $249.95

8" Sub-Systems - Single Sided, Double Density

END-000423 *Kit w/2 FD100-8Ds* _____ $650.00
END-000424 *A & T w/2 FD100-8Ds* _____ $695.00
END-000433 *Kit w/2 SA-801Rs* _____ $999.95
END-000434 *A & T w/2 SA-801Rs* _____ $1195.00

8" Sub-Systems - Double Sided, Double Density

END-000426 *Kit w/2 DT-8s* _____ $1224.95
END-000427 *A & T w/2 DT-8s* _____ $1424.95
END-000436 *Kit w/2 SA-851Rs* _____ $1274.95
END-000437 *A & T w/2 SA-851Rs* _____ $1474.95

8" Slimline Sub-Systems

Dual Slimline Sub-Systems - Jade

Handsome vertical cabinet with scratch resistant baked enamel finish, proportionally balanced air flow system, quiet cooling fan, rugged dual drive power supply, power cables, power switch, line cord, fuse holder, cooling fan, all necessary hardware to mount 2-8" slimline disk drives. does not include signal cable.

Dual 8" Slimline Cabinet

END-000820 *Bare cabinet* _____ $59.95
END-000822 *A & T w/o drives* _____ $179.95

Dual 8" Slimline Sub-Systems

END-000823 *Kit w/2 TM848-1* _____ $919.95
END-000824 *A & T w/2 TM848-1* _____ $949.95
END-000833 *Kit w/2 TM848-2* _____ $1149.95
END-000834 *A & T w/2 TM848-2* _____ $1179.95

5¼" Disk Drives

Tandon TM100-1 *single-sided double-density 48 TPI*
MSM-551001 _____ $219.95 ea 2 for $199.95 ea

Shugart SA400L *single-sided double-density 40 track*
MSM-104000 _____ $234.95 ea 2 for $224.95 ea

Shugart SA455 *half-size double-sided 48 TPI*
MSM-104550 _____ $349.95 ea 2 for $329.95 ea

Shugart SA465 *half-size doule-sided 96 TPI*
MSM-104650 _____ $399.95 ea 2 for $379.95 ea

Tandon TM100-2 *double-sided double-density 48 TPI*
MSM-551002 _____ $294.95 ea 2 for $269.95 ea

Shugart SA450 *double-sided double-density 35 track*
MSM-104500 _____ $349.95 ea 2 for $329.95 ea

Tandon TM100-3 *single-sided double-density 96 TPI*
MSM-551003 _____ $294.95 ea 2 for $269.95 ea

Tandon TM100-4 *double-sided double-density 96 TPI*
MSM-551004 _____ $394.95 ea 2 for $374.95 ea

MPI B-51 *single-sided double-density 40 track*
MSM-155100 _____ $234.95 ea 2 for $224.95 ea

MPI B-52 *double-sided double-density 40 track*
MSM-155200 _____ $344.95 ea 2 for $334.95 ea

5¼" Cabinets with Power Supply

END-000216 *Single cab w/power supply* _____ $69.95
END-000226 *Dual cab w/power supply* _____ $94.95

S-100 EPROM Boards

PB-1 - SSM Microcomputer

2708, 2716 EPROM board with on-board programmer.

MEM-99510K *Kit with manual* _____ $154.95
MEM-99510A *A & T with manual* _____ $219.95

PROM-100 - SD Systems

2708, 2716, 2732 EPROM programmer with software.

MEM-99520K *Kit with software* _____ $189.95
MEM-99520A *A & T with software* _____ $249.95

Printers on Sale

STARMICRONICS GEMENI

High speed dot matrix printers with all the features of the higher-priced best-selling machines for a lot less money!!! 100 CPS, 9 x 9 dot matrix with true lower case descenders, high-resolution bit image and block graphics, superscript & subscript, underlining, backspacing, double strike and emphasized print modes, proportional space font, friction feed, tractor feed, and roll paper, 5, 6, 8½, 10, 12, & 17 pitch, programable line spacing, FREE 2.3K buffer, Epson pin and plug compatible, user replaceable print head, extended 6 month factory warranty.

PRM-66010 *10" wide carriage* _____ $399.95
PRM-66015 *15" wide carriage* _____ $529.95
PRA-66200 *Serial interface card* _____ $69.95

HIGH-SPEED, HIGH QUALITY - Okidata

Microline 82A *80/132 column, 120 CPS, 9 x 9 dot matrix, friction feed, pin feed, adjustable tractor feed (optional), handles 4 part forms up to 9.5" wide, rear & bottom feed, paper tear bar, 100% duty cycle/200,000,000 character print head, bi-directional/logic seeking, both serial & parallel interfaces included, front panel switch & program control of 10 different form lengths, uses inexpensive spool type ribbons, double width & condensed characters, true lower case descenders & graphics*

PRM-43082 *with FREE tractor* _____ CALL

Microline 83A *132/232 column, 120 CPS, forms up to 15" wide, removable tractor, plus all the features of the 82A.*

PRM-43083 *with FREE tractor* _____ CALL

Microline 84 *132/232 column, Hi-speed 200 CPS, full dot graphics built in, plus all the features of the 83A.*

PRM-43084 *Centronics parallel* _____ CALL
PRM-43085 *Serial with 2K buffer* _____ CALL

IOP-2100A *Apple card and cable* _____ $69.95
PRA-27087 *TRS-80 cable* _____ $24.95
PRA-43081 *2K hi speed serial card* _____ $149.95
PRA-43082 *Hi-res graphics ROMs 82A* _____ $49.95
PRA-43083 *Hi-graphics ROMs 83A* _____ $49.95
PRA-43088 *Tractor option for 82A* _____ $49.95

EPROM Erasers

ULTRA-VIOLET EPROM ERASERS

Inexpensive erasers for industry or home.

XME-3100A *Spectronics w/o timer* _____ $69.50
XME-3101A *Spectronics with timer* _____ $94.50
XME-3200A *Economy model* _____ $49.95

Letter Quality Printers

LETTER QUALITY PRINTER - COMREX

Uses standard daisy wheels and ribbon cartridges, 16 CPS bi-directional printing, semi-automatic paper loader (single sheet or fan fold), 10/12/15 pitch, up to 16" paper, built-in noise suppression cover.

PRD-11001 *Centronics parallel* _____ $899.95
PRD-11002 *RS-232C serial model* _____ $969.95
PRA-11000 *Tractor Option* _____ $119.95

STARWRITER F-10 - C. Itoh

New 40 CPS daisy wheel printer with full 15" carriage, uses standard Diablo print wheels and ribbons, both parallel and serial interfaces included.

PRD-22010 *Starwriter F-10* _____ $1495.95

S-100 MotherBoards

ISO-BUS - Jade

Silent, simple, and on sale - a better motherboard

6 Slot (5¼" x 8⅝")

MBS-061B *Bare board* _____ $22.95
MBS-061K *Kit* _____ $39.95
MBS-061A *A & T* _____ $69.95

12 Slot (9¾" x 8⅝")

MBS-121B *Bare board* _____ $34.95
MBS-121K *Kit* _____ $69.95
MBS-121A *A & T* _____ $109.95

18 Slot (14½" x 8⅝")

MBS-181B *Bare board* _____ $54.95
MBS-181K *Kit* _____ $99.95
MBS-181A *A & T* _____ $149.95

JADE
Computer Products

Place Orders Toll Free

Inside California **800-262-1710**
Continental U.S. **800-421-5500**

JADE
Computer Products

Circle 229 on Inquiry card.

www.americanradiohistory.com

NEW PRODUCTS,

APPLE II ACCESSORIES

APPLE DISK DRIVE - Apple Compatible

Totally Apple compatible, 143,360 bytes per drive on DOS 3.3, full one year factory warranty, half-track capability reads all Apple software, plugs right into Apple controller as second drive, DOS 3.3, 3.2.1, Pascal, & CP/M compatible.

MSM-123200 *Add-on Apple Drive* ____ **$269.95**
MSM-123100 *Controller* ____ **$99.95**

16K RAM CARD - for Apple II

Expand your Apple II to 64K, use as language card. full 1 year warranty. Why spend $175.00 ?

MEX-16700A *Save over $115.00* ____ **$59.95**

Z-CARD for Apple II - A.L.S.

Two computers in one, Z-80 & 6502, more than doubles the power and potential of your Apple, includes Z-80 CPU card CP/M 2.2 and complete manual set, Pascal compatible, utilities are menu-driven, one year warranty.

CPX-62800A *A & T with CP/M 2.2* ____ **$159.95**

SMARTERM II - A.L.S.

80 column x 24 line video card for Apple II, addressable 25th status line, normal/inverse or high/low video, 128 ASCII characters, upper and lower case, 7 x 9 dot matrix with true descenders, standard Data Media terminal control codes, CP/M Pascal & Fortran compatible, 50/60 Hz, 40/80 column selection from keyboard.

IOV-2500A *ALS Smarterm II* ____ **$169.95**

SERIAL I/O CARD - A.L.S.

Full feature serial card for modems & printers, baud rates from 110 to 19,200, CTC/RTS & X-on/X-off protocols, auto line feed, RS-232C cable interface included.

IOI-1000A *A & T "Dispatcher Card"* ____ **$129.95**

CP/M 3.0 CARD for APPLE - A.L.S.

The most powerful card availability for your Apple!

6 MHz, Z-80B, additional 64K of RAM, CP/M plus 3.0, 100% CP/M 2.2 compatibility, C basic, CP/M Graphics, 3005 faster than any other CP/M for Apple. One year warranty.

CPX-82810A *A.L.S. CP/M Card* ____ **$349.95**

2 MEGABYTES for Apple II

Complete package includes: Two 8" double-density disk drives, Vista double-density 8" disk controller, cabinet, power supply, & cables, DOS 3.2/3.3, CP/M 2.2, & Pascal compatible.

1 MegaByte Package *Kit* ____ **$1495.00**
1 MegaByte Package *A & T* ____ **$1695.00**
2 MegaByte Package *Kit* ____ **$1795.00**
2 MegaByte Package *A & T* ____ **$1995.95**

MODEM CARD FOR APPLE - SSM

Better than Hayes!! Better than Novation!! *Direct connect ModemCard plugs directly into Apple - no external components, auto-dial, auto-answer, Bell 103 compatible, full and half duplex, touch-tone or pulse dialing generated on board, Micromodem II software compatible, displays modem information on screen, audio monitoring of phone line, no serial port required, two year factory warranty, FREE Source Subsription with purchase of Transend software.*

IOM-2430A *ModemCard* ____ **$289.95**
SFA-55770010M *Transend 1 w/Source* ____ **$79.95**
SFA-55770010M *Transend 2 w/Source* ____ **$129.95**
SFA-55770030M *Transend 3 w/Source* ____ **$239.95**



S-100 MEMORY BOARDS

64K STATIC RAM - Jade

Uses new 2K x 8 static RAMs, fully supports IEEE 696 24 bit extended addressing, 200ns RAMs, lower 32K or entire board phantomable, 2716 EPROMs may be subbed for RAMs, any 2K segment of upper 8K may be disabled, low power typically less than 500ma.

MEM-99152B *Bare board* ____ **$49.95**
MEM-99152K *Kit less RAM* ____ **$99.95**
MEM-32152K *32K kit* ____ **$199.95**
MEM-56152K *56K kit* ____ **$289.95**
MEM-64152K *64K kit* ____ **$299.95**
Assembled & Tested ____ **add $50.00**

256 RAMDISK - SD Systems

ExpandoRAM III expandable from 64K to 256K using 64Kx1 RAM chips, compatible with CP/M, MP/M, Oasis, & most other Z-80 based systems, functions as ultra-high speed disk drive when used with optional RAMDISK software.

MEM-65064A *64K A & T* ____ **$474.95**
MEM-65128A *128K A & T* ____ **$574.95**
MEM-65192A *192K A & T* ____ **$674.95**
MEM-65256A *256K A & T* ____ **$774.95**
SFC-55009000F *RAMDISK sftwr CP/M 2.2* ____ **$44.95**
SFC-55009000F *RAMDISK with EXRAM III* ____ **$24.95**

64K RAM BOARD - C.C.S.

IEEE S-100, supports front panels, bank select, fail-safe refresh 4MHz, extended addressing, list price $575.00 - less than half price!!!

MEM-64565A ____ **$199.95**

S-100 VIDEO BOARDS

MICROANGELO - Scion

Ultra-high-resolution 512 x 480, 256color or black & white S-100 video board

IOV-1500A *A & T* ____ **$799.95**

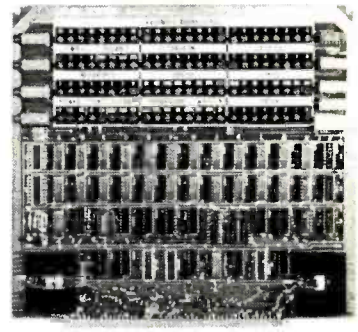

S-100 I/O BOARDS

THE BUS PROBE - Jade

Inexpensive S-100 Diagnostic Analyzer

So your computer is down. And you don't have an oscilloscope. And you don't have a front panel... You're not alone - most computers have their occasional bad days. But without diagnostic equipment such as an oscilloscope (expensive!) or a front panel (expensive!), it can be very difficult to pinpoint the problem. Even if you have an extender board with a superfast logic probe, you can't see more than one signal at a time. You're stuck, right?

*Not anymore: Jade is proud to offer our cost-effective solution to the problems mentioned above: **THE BUS PROBE.***

Whether you're a hobbyist with a cantankerous kluge or a field technician with an anxious computer owner breathing down your neck, you'll find THE BUS PROBE speeds your repair time remarkably. Just plug in THE BUS PROBE and you'll be able to see all the IEEE S-100 signals in action. THE BUS PROBE allows you to see inputs, outputs, memory reads and writes, instruction fetches, DMA channels vectored interrupts, 8 or 16 bit wide data transfers, plus the three bus supply voltages.

TSX-200B *Bare board* ____ **$59.95**
TSX-200K *Kit* ____ **129.95**
TSX-200A *A & T* ____ **$159.95**

I/O-4 - SSM Microcomputer

2 serial I/O ports plus 2 parallel I/O ports.

IOI-1010B *Bare board w/manual* ____ **$35.95**
IOI-1010K *Kit with Manual* ____ **$179.95**
IOI-1010A *A & T* ____ **$249.95**

I/O-5 - SSM Microcomputer

Two serial & 3 parallel I/O ports, 110-19.2K Baud

IOI-1015A *A & T* ____ **$289.95**

INTERFACER 4 - CompuPro

3 serial, 1 parallel, 1 Centronics parallel.

IOI-1840A *A & T* ____ **$314.95**
IOI-1840C *CSC* ____ **$414.95**

PLACE ORDERS TOLL FREE

Continental U.S.
800-421-5500

Inside California
800-262-1710

For Technical Inquires or Customer Service call:
213-973-7707

We accept cash, checks, credit cards, or Purchase Orders from qualified firms and institutions.
Minimum prepaid order $15.00 California residents add 6½% tax. Export customers outside the US or Canada please add 10% to all prices. **Prices and availibility subject to change without notice.** Shipping and handling charges via UPS Ground 50¢/lb. UPS Air $1.00/lb. **minimum charge $3.00**

Circle 230 on Inquiry card.

www.americanradiohistory.com

LOWER PRICES !!!

S-100 CPU BOARDS

SBC-200 - SD Systems

4 MHz Z-80A CPU with serial & parallel I/O, 1K RAM, 8K ROM space, monitor PROM included.

CPC-30200A *A & T* _____ $329.95

THE BIG Z - Jade

2 or 4 MHz switchable Z-80 CPU board with serial I/O, accomodates 2708, 2716, or 2732 EPROM, baud rates from 75 to 9600.

CPU-30201B *Bare board w/manual* _____ $35.00
CPU-30201K *Kit with Manual* _____ $149.95
CPU-30201A *A & T with Manual* _____ $199.95

2810 Z-80 CPU - C.C.S.

2 or 4 MHz Z-80 CPU with serial I/O port & on board monitor PROM, front panel compatible.

CPU-30400A *A & T with PROM* _____ $289.95

CPU-Z - CompuPro

2/4 MHz Z80A CPU, 24 bit addressing.

CPU-30500A *2/4 MHz A & T* _____ $279.95
CPU-30500C *3/6 MHz CSC* _____ $374.95

8085/8088 - CompuPro

Both 8 & 16 bit CPUs, standard 8 bit S-100 bus, up to 8 MHz, accesses 16 Megabytes of memory.

CPU-20510A *6 MHz A & T* _____ $398.95
CPU-20510C *6/8 MHz CSC* _____ $497.95

8" DISK DRIVES

Siemens FDD 100-8 single-sided double-density
MSF-201120 _____ *$274.95 ea* 2 for $249.95 ea

Shugart SA810 half-size single-sided double-density
MSF-108100 _____ $424.95 ea 2 for $394.95 ea

Shugart SA860 half-size double-sided double-density
MSF-108600 _____ $574.95 ea 2 for $549.95 ea

Shugart SA801R single-sided double-density
MSF-10801R _____ $394.95 ea 2 for $389.95 ea

Shugart SA851R double-sided double-density
MSF-10851R _____ $554.95 ea 2 for $529.95 ea

Tandon TM848-1 single-sided double-den thin-line
MSF-558481 _____ $379.95 ea 2 for $369.95 ea

Tandon TM848-2 double-sided double-den thin-line
MSF-558482 _____ $494.95 ea 2 for $484.95 ea

Qume DT-8 double-sided double-density
MSF-750080 _____ $524.95 ea 2 for $498.95 ea

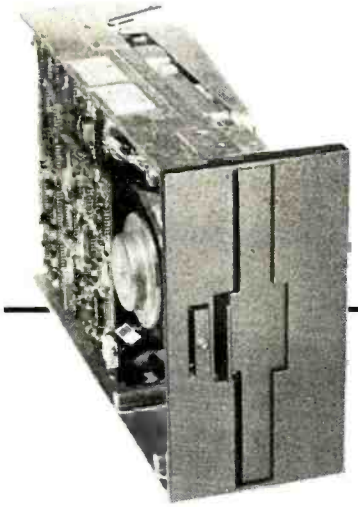

MODEMS

SMART BUY In MODEMS - Signalman

1200 and/or 300 baud, direct connect, automatic answer or orginate selection, auto-answer/auto-dial on deluxe models, IBM model plugs directly into an IBM option slot and does not require a serial port (a $300.00 savings!), 9v battery allows total portability, full one year warranty.

IOM-5600A *300 baud direct connect* _____ *$89.95*
IOM-5610A *300 baud Deluxe* _____ *$149.95*
IOM-5620A *1200/300 baud Deluxe* _____ *$369.95*
IOM-5630A *300 baud for IBM PC* _____ *$269.95*
IOM-5640A *300 baud for TI 99/4* _____ *$119.95*
IOM-5650A *300 baud for Osborne* _____ *$119.95*
IOM-5660A *300 baud Atari 850* _____ *$99.95*
IOM-5670A *300 baud PET/CBM* _____ *$169.95*

1200 BAUD SMARTMODEM - Hayes

1200 and 300 baud, all the features of the standard Smartmodem plus 1200 baud, 212 compatible, full or half duplex.

IOM-5500A *Smartmodem 1200* _____ $599.95

SMARTMODEM - Hayes

Sophisticated direct-connect auto-answer/auto-dial modem, touch-tone or pulse dialing, RS-232C interface, programmable

IOM-5400A *Smartmodem* _____ $224.95
IOK-1500A *Hayes Chronograph* _____ $218.95
IOM-2010A *Micromodem II w/term prgm* _____ $329.95
IOM-2012A *Terminal program for MMII* _____ $89.95
IOM-1100A *Micromodem 100* _____ $368.95

1200 BAUD SMART CAT - Novaton

103/212 Smart Cat & 103 Smart Cat, 1200 & 300 baud, built-in dialer, auto re-dial if busy, auto answer/disconnect, direct connect, LED readout displays mode, analog/digital loop-back self tests, usable with multi-line phones.

IOM-5241A *300 baud 103 Smart Cat* _____ $229.95
IOM-5251A *1200 baud 212/103 Smart Cat* _____ $549.95
IOM-5261A *300 baud 103 J-Cat* _____ $129.95

J-CAT™ MODEM - Novation

1/5 the size of ordinary modems, Bell 103, manual or auto-answer, automatic answer/originate, direct conect, built-in self-test, two LED's and audio "beeps" provide complete status information.

IOM-5261A *Novation* _____ $149.95

S-100 DISK CONTROLLERS

DISK 1 - CompuPro

8" or 5¼" DMA disk controller, single or double density, single or double sided, 10 MHz.

IOD-1810A *A & T* _____ $449.95
IOD-1810C *CSC* _____ $554.95

VERSAFLOPPY II - SD Systems

Double density disk controller for any combination of 5¼" and 8" single or double sided, analog phase-locked loop data separator, vectored interrupts, CP/M 2.2 & Oasis compatible, control/diagnostic software PROM included.

IOD-1160A *A & T with PROM* _____ $359.95
SFC-55009047F *CP/M 3.0 with VF II* _____ $99.95

2242 DISK CONTROLLER - C.C.S.

5¼" or 8" double density disk controller with on-board boot loader ROM, free CP/M 2.2 & manual set.

IOD-1300A *A & T with CP/M 2.2* _____ $399.95

DOUBLE D - Jade

High reliablity double density disk controller with on-board Z-80A, auxiliary printer port, IEEE S-100, can function in multi-user interrupt driven bus.

IOD-1200B *Bare board & hdwr man* _____ $59.95
IOD-1200K *Kit w/hdwr & sftwr man* _____ $299.95
IOD-1200A *A & T w/hdwr & sftwr man* _____ $325.95
SFC-59002001f *CP/M 2.2 with Double D* _____ $99.95

NEW! CP/M PLUS 3.0

CP/M 3.0 is Digital Research's latest version of the industry standard disk operating system. It features many performance improvements such as intelligent record buffering, improved directory handling, "HELP" facility, time/date stamping of files and many more improvements. AND A TREMENDOUS INCREASE IN SPEED !!!, it is fully CP/M 2.2 compatible and requires no changes to your existing application software. Available only to Versafloppy II owners with SBC-200 CPU's

- ***CP/M 2.2 compatible***
- ***Easily customized***
- ***Easier to learn and use***
- ***High performance file system***
- ***Automatic disk log-in of removable media***
- ***Support for 1 to 16 banks of RAM***
- ***Supports up to 16 drives of 512 Megabytes each***
- ***Up to ten times faster than CP/M 2.2***
- ***Console I/O re-direction***
- ***Easy to use system utilities with HELP facility***
- ***Power batch facility***
- ***Designed for application programmers***
- ***Resident system extensions***

SFC-55009057F *CP/M 3.0 8" with manuals* _____ $200.00
SFC-55009057M *CP/M 3.0 Manual* _____ $30.00

THREE BOARD SET — SD Systems

FREE CP/M 3.0

Save $800.00

S-100 board set with 4 MHz Z-80A, 64K of RAM expandable to 256K, serial and parallel I/O ports, double-density disk controller for 5¼" and 8" disk drives, new and improved CP/M 3.0 manual set, system monitor, control and diagnostic software. Includes SD Systems SBC-200, 64K ExpandoRAM III, Versafloppy II, and FREE CP/M 3.0 - all boards are assembled & tested.

* 64K Board Set with FREE CP/M 3.0 _____ $1195.00
256K Board Set with FREE CP/M 3.0 _____ $1395.00

LIMITED QUANTITY

JADE
Computer Products

4901 West Rosecrans, Hawthorne, California 90250

Circle 230 on Inquiry card.

www.americanradiohistory.com

DoKay Computer Products, Inc.

VISIT OUR RETAIL STORE
AND RECEIVE A 5% DISCOUNT!

3250 KELLER STREET, #9 • SANTA CLARA, CA 95050

EPROMS

1702	1ns	2.95
2708	450ns	2.98
2758	5V450ns	9.70
TMS 2516	5V450ns	5.70
2716	5V450ns	3.44
2716-1	5V 350ns	5.70
TMS 2716	450ns	8.70
2532	5V450ns	7.80
2732	5V450ns	4.15
2764	5V450ns	12.95
MC68764	5V450ns (24pin)	39.00

DYNAMIC RAMS

TMS 4027	250	1.99
MK 4108	200ns	1.74
MM 5298	250ns	1.74
4116	150ns	1.74
4116	200ns	1.24
4116	250ns	1.14
2118	5V 150ns	4.90
MK 4816	5V300ns	5.25
4164-200	5V 200ns	5.45
4164-150	5V150ns	6.35

STATIC RAMS

2101	450ns		1.80
2101-1	450ns		.78
2101L-2	250ns	LP	1.54
2112	450ns		2.48
2112	450ns		2.68
2114	450ns		1.74
2114 L-3	300ns	LP	1.84
2114 L-2	200ns	LP	1.94
2147	55ns		8.90
TMS 4044-4	450ns		3.15
TMS 4044-3	300ns		3.45
TMS 4044-2	200ns		3.90
MK 4118	250ns		9.70
TMM2016	200ns		4.15
TMM2016	150ns		5.44
TMM2016	100ns		7.44
HM6116-4	200ns		4.90
HM6616-3	150ns		5.75
HM6116-2	120ns		6.95
Z-6132	300ns		32.95

LP = Low Power

16K APPLE* II RAM CARD

BARE BOARD 14.00
KIT
ASSEMBLED 42.50

*Apple is a trademark of Apple Computer, Inc.

INTERFACE

8T26	1.65
8T28	1.95
8T95	.95
8T96	.95
8T97	.95
8T98	.95
DM8131	2.90
DP8304	2.25
DS8836	1.25

RESISTORS

¼ WATT 5% CARBON FILM
ALL STANDARD VALUES
FROM 1 OHM TO 10 MEG OHM

50 PCS. SAME VALUE	.0200
100 PCS. SAME VALUE	.0150
1000 PCS. SAME VALUE	.0125

We Will Beat Any Competitors' Prices!

6500

1 MHZ

6502	5.44
6504	6.85
6505	7.60
6507	9.85
6520	4.30
6522	7.90
6532	9.90
6545	16.95
6551	

2 MHZ

6502A	9.95
6522A	10.90
6532A	11.90
6545A	27.90
6551A	11.90

3 MHZ

6502B	11.90

74LS

74LS00	.23	74LS123	.94	74LS253	.58
74LS01	.23	74LS124	2.89	74LS257	.58
74LS02	.23	74LS125	.94	74LS258	.78
74LS03	.23	74LS126	.78	74LS259	2.74
74LS04	.23	74LS132	.74	74LS260	.59
74LS05	.23	74LS136	.48	74LS266	.48
74LS08	.23	74LS137	.94	74LS273	1.48
74LS10	.23	74LS138	.74	74LS275	3.20
74LS11	.29	74LS139	.74	74LS279	.48
74LS12	.29	74LS145	1.09	74LS280	1.94
74LS13	.39	74LS147	2.19	74LS283	.94
74LS14	.58	74LS148	1.19	74LS290	.88
74LS15	.29	74LS151	.54	74LS293	.88
74LS20	.23	74LS153	.54	74LS295	.98
74LS21	.29	74LS154	1.74	74LS298	.88
74LS22	.23	74LS155	.68	74LS324	1.74
74LS26	.29	74LS156	.68	74LS352	1.28
74LS27	.24	74LS157	.64	74LS353	1.28
74LS28	.29	74LS158	.58	74LS363	1.34
74LS30	.24	74LS160	.68	74LS364	1.94
74LS32	.28	74LS161	.64	74LS365	.48
74LS33	.54	74LS162	.68	74LS366	.48
74LS37	.54	74LS163	.68	74LS367	.44
74LS38	.34	74LS164	.68	74LS368	.44
74LS40	.24	74LS165	.68	74LS373	.98
74LS42	.48	74LS166	1.94	74LS374	.98
74LS47	.74	74LS168	1.68	74LS377	1.39
74LS48	.74	74LS169	1.68	74LS378	1.14
74LS49	.74	74LS170	1.68	74LS379	1.34
74LS51	.24	74LS173	.68	74LS385	1.88
74LS54	.24	74LS174	.54	74LS386	.44
74LS55	.28	74LS175	.88	74LS390	1.18
74LS63	1.19	74LS181	1.48	74LS393	1.18
74LS73	.35	74LS189	8.90	74LS395	1.18
74LS74	38.	74LS190	.78	74LS399	1.58
74LS75	.38	74LS191	.88	74LS424	2.88
74LS76	.38	74LS192	.68	74LS447	.36
74LS78	.48	74LS193	.68	74LS490	1.88
74LS83	.59	74LS194	.88	74LS668	1.64
74LS85	.95	74LS195	.74	74LS669	1.84
74LS86	.38	74LS196	.78	74LS670	1.48
74LS90	.54	74LS197	.78	74LS674	9.45
74LS91	.74	74LS221	1.09	74LS682	2.98
74LS92	.54	74LS240	.94	74LS683	2.38
74LS93	.54	74LS241	.94	74LS684	2.38
74LS95	.74	74LS242	.64	74LS685	2.38
74LS96	.78	74LS243	.64	74LS688	2.38
74LS107	.38	74LS244	.89	74LS689	2.38
74LS109	.38	74LS245	1.88		
74LS112	.38	74LS247	.74	81LS95	1.48
74LS113	.38	74LS248	1.19	81LS96	1.48
74LS114	.38	74LS249	.88	81LS97	1.48
74LS122	.44	74LS251	.58	81LS98	1.48

UARTS

AY3 1014	5.80
AY5 1013	3.90
AY5 2376	10.90
TR 1602	3.85
1M 6402	7.80
1M 6403	8.80

LEDS

Jumbo Red	10/1.00
Jumbo Green	6/1.00
Jumbo Yellow	6/1.00

DIP SWITCHES

4 Position	.84
5 Position	.94
6 Position	1.98
7 Position	2.74
8 Position	2.48
	1.24

EXAR

XR 2206	3.70
XR 2207	3.70
XR 2208	3.85
XR 2211	5.20
XR 2240	3.20

RCA

CA 3010	
CA 3013	.94
CA 3023	1.98
CA 3035	2.74
CA 3039	2.48
CA 3046	1.24
CA 3053	1.45
CA 3059	2.89
CA 3060	2.89
CA 3065	1.74
CA 3080	1.09
CA 3081	1.64
CA 3082	1.64
CA 3083	1.64
CA 3086	.80
CA 3089	2.89
CA 3130	1.24
CA 3140	1.14
CA 3146	1.74
CA 3160	1.14
CA 3401	.58
CA 3600	3.40

CMOS

4000	.24	4066	.89	74C89	4.45
4001	.29	4093	.90	74C90	1.74
4002	.24	4098	2.48	74C93	.98
4006	.89	4099	1.89	74C95	.88
4007	.24	4502	.89	74C107	5.70
4008	.89	4503	.59	74C150	2.25
4009	.44	4508	1.89	74C151	3.25
4010	.44	4510	.84	74C154	1.75
4011	.29	4511	.84	74C157	1.18
4012	.24	4512	.84	74C160	1.18
4013	.38	4514	1.19	74C161	1.99
4014	.78	4515	1.78	74C162	1.18
4015	.38	4516	1.49	74C163	1.38
4016	.38	4518	.89	74C164	1.99
4017	.68	4519	.38	74C165	.78
4018	.78	4520	.78	74C173	1.18
4019	.38	4522	1.19	74C174	1.18
4020	.74	4526	1.19	74C175	1.48
4021	.78	4527	1.89	74C192	1.48
4022	.78	4528	1.19	74C193	1.38
4023	.34	4531	.89	74C195	5.70
4024	.74	4532	1.89	74C200	1.74
4025	.34	4538	1.89	74C221	2.44
4026	.59	4539	1.89	74C373	2.74
4027	.44	4543	1.19	74C374	.38
4028	.68	4555	.89	74C901	.84
4029	.78	4556	.89	74C902	.84
4030	.38	4581	1.18	74C903	10.90
4034	1.94	4582	1.90	74C905	.94
4035	.84	4584	.74	74C906	.99
4040	.73	4585		74C907	1.99
4041	.74	80C07	.89	74C908	2.74
4042	.68	80C95	.89	74C909	9.90
4043	.74	80C96	.89	74C910	8.90
4044	.74	80C97	.89	74C911	8.90
4046	.84	80C98	1.14	74C912	1.94
4047	.89			74C914	1.18
4049	.34	74C00	.34	74C915	2.74
4050	.34	74C02	.34	74C918	15.95
4051	.34	74C04	.34	74C920	15.95
4053	.78	74C08	.34	74C921	4.45
4060	.78	74C10	.34	74C922	4.90
4066	.88	74C14	.58	74C923	5.90
4068	.38	74C20	.34	74C925	7.90
4069	.39	74C30	.34	74C926	7.90
4070	.28	74C32	.49	74C927	7.90
4071	.35	74C42	1.28	74C928	7.90
4072	.29	74C48	1.19	74C929	16.95
4073	.29	74C73	.64	74C930	
4075	.29	74C74	.64	14409	12.85
4076	.29	74C76	.79	14410	12.85
4078	.78	74C83	1.94	14411	11.85
4081	.28	74C85	1.94	14412	12.85
4082	.89	74C86	.38	14419	4.85

DoKay Computer Products, Inc.
3250 Keller Street, #9
Santa Clara, CA 95050
(800) 538-8800
Calif. Residents (800) 848-8008
Local Phone (408) 988-0697

BANKAMERICARD VISA

master charge

TERMS: For shipping include $2.00 for UPS Ground. $3.00 for UPS Blue Label Air. $10.00 minimum order. Bay Area residents add 6½% Sales Tax. California residents add 6% Sales Tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice. Send SASE for complete list.

Circle 154 on inquiry card.

www.americanradiohistory.com

APPLE* II USERS DISK DRIVE!

- Includes metal cabinet
- Color matches Apple
- 35 Tracks/single side
- Includes cable
- Use with Apple II Controller

265.00

WITH CONTROLLER CARD - 359,95

DoKay Computer Products, Inc.

VISIT OUR RETAIL STORE
AND RECEIVE A 5% DISCOUNT!

3250 KELLER STREET, #9 • SANTA CLARA, CA 95050

APPLE **UPGRADE** TRS-80

4116 - 200ns
8/10.00

Z80 SERIES

2.5 MHZ	
Z80-CPU	3.75
Z80-PIO	4.90
Z80-CTC	14.90
Z80-DMA	13.95
Z80-DART	16.95
Z80-SIO/0	16.95
Z80-SIO/1	16.95
Z80-SIO/2	15.95
Z80-SIO/9	16.95
4.0 MHZ	
Z80A-CPU	4.90
Z80A-PIO	4.90
Z80A-CTC	6.90
Z80A-DMA	21.95
Z80A-DART	15.95
Z80A-SIO/0	20.95
Z80A-SIO/1	21.95
Z80A-SIO/2	21.95
Z80A-SIO/9	18.95
6.0 MHZ	
Z80B-CPU	14.95
Z80B-PIO	12.95
Z80B-CTC	12.95
ZILOG	
Z6132	32.95
Z8671	38.95

5¼" Diskettes

NASHUA
SS SD 18.95

NASHUA
SS DD. 20.95

NASHUA
DS DD. 27.95

Five year warranty on NASHUA DISKETTES

LINEAR

LM301	.32	LM741	.29
LM308	.75	LM747	.75
LM309K	1.25	LM748	.49
LM311	.64	LM1310	2.45
LM317T	1.65	MC1330	1.69
LM317K	1.70	MC1350	1.25
LM318	1.49	MC1358	1.69
LM323K	3.75	LM1414	1.49
LM324	.59	LM1458	.55
LM337K	3.90	LM1488	.95
LM339	.79	LM1489	.95
LM377	2.25	LM1800	2.45
LM380	1.25	LM1889	2.45
LM386	1.00	LM3900	.59
LM555	.38	LM3909	.95
LM556	.65	LM3914	3.70
LM565	.95	LM3915	3.70
LM566	1.45	LM3916	3.70
LM567	.99	75451	.35
LM723	.49	75452	.35
LM733	.95	75453	.35

CLOCK CIRCUITS

MM 5314	4.90
MM 5369	3.90
MM 5375	4.90
MM 58167	8.90
MM 58174	10.95
MSM 5832	6.90

ORDER TOLL FREE
(800) 538-8800
(800) 848-8008
(CALIFORNIA RESIDENTS)
ALL MERCHANDISE IS 100% GUARANTEED

Disc Controllers

1771	16.00
1791	27.95
1793	29.95
1795	49.95
1797	49.95
1691	17.95
UPD 765	34.95

6800

1 MHz

6800	4.75
6802	8.65
6808	8.45
6809	11.95
6809 E	17.95
6810	2.90
6820	3.50
6821	3.50
6828	14.90
6840	7.95
6843	32.95
6844	32.95
6845	16.90
6847	11.95
6850	3.20
6852	3.50
6860	10.90
6862	11.90
6875	6.90
6880	1.80
6883	22.95

2 MHz

68B00	10.00
68B02	21.95
68B09	28.95
68B09 E	29.90
68B10	7.90
68B21	12.00
68B45	34.00
68B50	12.00

8 MHz

68000	95.95

9000 SERIES

9316	.95
9334	2.39
9368	3.69
9401	8.95
9601	.69
9602	1.39
96S02	1.79

MISC.

11 C 90	12.95
3242	6.95
MC 3470	7.95
MC 3480	8.95
ULN 2003	5.95
CA 3146	1.75
2513-001 up	9.69
2513-002 low	9.69

CRYSTALS

32.768 KHZ	1.90	5.185	3.90
10 MHZ	4.50	5.7143	3.90
1.8432	4.50	6.5536	3.90
2.0	3.90	8.0	3.00
2.097152	3.90	10.0	3.00
2.4576	3.90	14.31818	3.90
3.2768	3.90	18.0	3.00
3.579545	3.00	18.432	3.00
4.0	3.00	20.0	3.00
5.0	3.00	22.1184	3.00
5.0688	3.90	32.0	3.90

IC Sockets

	ST	W/W
8 PIN	.10	.49
14 PIN	.12	.50
16 PIN	.15	.57
18 PIN	.20	.85
20 PIN	.25	.99
22 PIN	.25	1.30
24 PIN	.25	1.40
28 PIN	.35	1.50
40 PIN	.40	1.80

ST = Soldertail
W/W = Wirewrap

VOLTAGE REGULATORS

7805T	.75	7908T	.85
7808T	.75	7912T	.85
7812T	.75	7915T	.85
7815T	.75	7924T	.95
7824T	.85	7905K	1.39
7805K	1.29	7912K	1.39
7812K	1.29	7915K	1.39
7815K	1.29	7924K	1.39
7824K	1.29	T = TO-220	
7905T	.85	K = TO-3	

8000

8035	6.95	8239	4.75
8039	7.59	8243	4.75
8080A	3.90	8250	14.90
8085A	7.95	8251	4.50
8088	34.95	8253	8.75
8155	7.75	8253-5	9.75
8156	8.75	8255	4.50
8185	29.00	8255-5	5.20
8741	39.00	8257	8.50
8748	14.95	8259	6.85
8755	29.95	8272	39.00
8202	27.95	8275	29.00
8205	3.45	8279	9.25
8212	1.80	8279-5	9.95
8214	3.75	8282	6.50
8216	1.75	8283	6.50
8224	2.45	8284	5.50
8226	1.80	8286	6.50
8228	4.50	8287	6.50
8237	19.00	8288	25.00
8238	4.75	8289	49.00

CONNECTORS

RS232 Male	2.99
RS232 Female	3.45
RS232 Female Right Angle	4.90
RS232 Hood	1.19
30 pin Edge	2.45
44 pin Edge	2.48
50 pin Edge	2.48
86 pin Edge	2.68
100 pin ST	3.85
100 pin W/W	3.85
	4.90

Power Supplies

MOUNTED ON PC BOARD
MANUFACTURED BY CONVER
+5 VOLT 4 AMP
±12 VOLT 1 AMP

34.95

DoKay Computer Products, Inc.
3250 Keller Street, #9
Santa Clara, CA 95050
(800) 538-8800
Calif. Residents (800) 848-8008
Local Phone (408) 988-0697

BANKAMERICARD VISA

master charge THE INTERBANK CARD

TERMS: For shipping include $2.00 for UPS Ground. $3.00 for UPS Blue Label Air. $10.00 minimum order. Bay Area residents add 6½% Sales Tax. California residents add 6% Sales Tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice. Send SASE for complete list.

Circle 154 on Inquiry card.

www.americanradiohistory.com

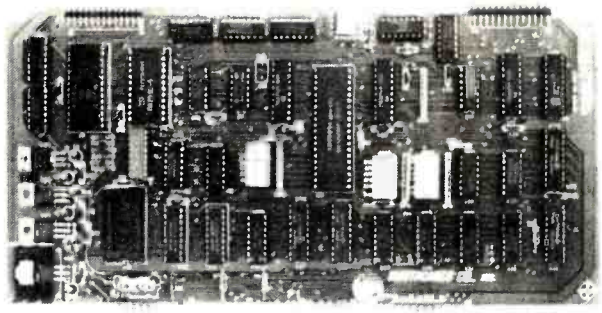

SBC-880 S-100 IEEE STAND ALONE
SINGLE BOARD COMPUTER
USES Z-80A (2 or 4MHz)

FEATURES: RS232 Serial I/O Port • Parallel Ports for Centronics or Gen Purpose Printer • Three 16 bit Programmable Timers, one used for baud rate • EPROM Circuitry for 2708, 2716, or 6116 (2K RAM) • 1K On Board RAM Circuitry locatable on 1K boundries • Power On EPROM Jump Circuitry • Phantom EPROM Circuitry

Kit $240
A & T $265



FDC-1 S-100 IEEE 696
FLOPPY DISC CONTROLLER
USES WD1795-02

FEATURES: State of the art digital separator • Drives can be any ANSI 5¼ or 8 drive • Drive Size, Step Rates, Formats can be intermixed without changing software • Runs SD, DD, SS and DS Formats • Digital Prewrite Compensation.

Assembled and Tested ..... $295.00 Kit $265.00

S-100 IEEE
REAL TIME CLOCK CALENDAR
GIVE YOUR COMPUTER THE Hour-Min.-Sec.-Day-Month-Year

FEATURES: Date provided as Day, Month, Year with Leap Year register bit • Time provided as 12 or 24 hour program selectable format, hours, minutes and seconds • Time and Date settable by program control • Plus or Minus 30 second time adjustment • 4 Time Interupts available – 1 hour, 1 minute, 1 second and 1040Hz (approx. 1 millisecond) • Crystal Controlled time reference • On board Rechargable Data Sentry Battery

Assembled and Tested ..... $135.00 Kit $115.00

★ SPECIAL ★

APPLE II COMPATIBLE FLOPPY DISC CONTROLLER
DIRECTLY DRIVES ANY ANSI, SHUGART OR TANDON DISK DRIVES

Frees you from Apple disc drives and Apple look alike drives.

FEATURES: Compatible with CP/M, PASCAL and Apple DOS 3.3 • Drives can be any standard Shugart compatible 5¼ drive • Reads 13 or 16 Sector Discs, hard or soft sectored • 7 Cards can be used to drive 14 Disc Drives (two drives each card)

Controller $99.95
Tandon, D/D TM100-1 ..... $225.00

APPLE II COMPATIBLE ASCII

FULL KEYBOARD

FEATURES: N-Key Rollover Function • Shift lock, Underscore and ¦ | / • High Flexibility for Modification or Expansion • Plug-in Compatible with Apple II • Compact size, mounts in Apple II Case • Full Typewriter Keyboard with TTL level ASCII outputs • On-Off Indications • Low Power Consumption

Assembled and Tested $99.00

S-100 IEEE 696 CARD CAGES AND MOTHER BOARDS

★Ground Sheilding Network prevents cross talk
★LED Power Indicator
★Easy Access to Power and Reset Lines
★Available in 6, 8, and 12 slot cages

	6 Slot	8 Slot	12 Slot
Bare Board	$20.00	$25.00	$35.00
Kit	40.00	55.00	80.00
Assembled & Tested	55.00	80.00	115.00
A & T and in Card Cage	80.00	115.00	155.00

SUNTRONICS PROTOTYPE BOARDS

APPLE Prototype Board. Double sided glass with gold plated Apple and General Purpose terminals. Contains matrix of 17 x 63 solder plated donuts on .15 x .1 spacing. Great for 14, 16, 24 pin IC s.
SUN-722 ..... $13.75

S-100 Prototype Board. Double sided glass with gold plated, numbered S-100 terminals. Matrix of 25 x 78 solder plated donuts on .15 x .1 spacing. Locations for headers and regulators. Great for 14, 16, 24 pin IC s.
SUN-721 ..... $17.85

General Purpose Experimental Prototype Boards
(Solder Plated w/Double Sided Terminals on .156" Centers)



15/30 pin, 3⅛ x 4½ board w/.1 x .2 hole spacing and power strip run every 1.2". Allows 6x7 8pin IC s or 2x3 24pin IC s.
SUN IC-S $1.65

22/44 pin, 4½ x 6⅛ board w/.1 hole spacing. Contains 4 rows of 67 pins with power strips between rows. Pattern of 4 columns of 67 pins. Takes all sizes of IC s.
SUN U-75 ..... $3.25

22/44 pin, 4⅛ x 7 board w/.1 x .2 hole spacing and power strips every 1.2". Allows 10x10 8pin IC s or 3x7 24pin IC s.
SUN IC-L $3.95

Dealer Inquires Invited

SAMWOO
MONITORS



Features: Composite Video Input/Output • Switchable Input Impedance 75 or 10K ohm • 750 Line Resolution at Center and 500 Lines at Corners • Dimensions are 12.13 x11.34 x 11.65 for the 12" model and 8.66 x-8.54 x9.05 for the 9" model

9" 18Mhz BANDWIDTH		12" 12MHz BANDWIDTH	
Black and White	$117.00	Black and White	$127.00
Green	121.00	Green	130.00
Orange	125.00	Orange	134.00

Add $7.50 Shipping and Handling for this item
Dealer Inquires Invited

EPROM's, RAM's, CPU, and MISC

	1-7	8 up	50 up		1-7	8 up	50 up
2716	3.95	3.95	3.95	6116P-3 (150nS)	6.10	5.75	CALL
2732	4.75	4.40	CALL	2114L-2 (200nS)	—	1.62	CALL
2532	7.65	5.95	CALL	4164 (200nS)	6.25	6.25	6.25
2764	10.00	10.00	10.00	Z-80A CPU	5.29	5.29	5.29

16K RAM Expansion Kit For TRS-80 Model III $11.00/8

SUNTRONICS CO., INC.

12621 Crenshaw Blvd., Hawthorne, CA 90250
STORE HOURS: MON.-FRI. 9:00am to 6:00pm
SATURDAY 10:00am to 5:00pm

CALIFORNIA **213-644-1149** (for Tech info and Card orders)
OUTSIDE CALIFORNIA TOLL FREE **1-800-421-5775** (Order Desk Only)

Mail Order—Minimum Order $10. Send Money Order or Check to: P.O. BOX 1957—Dept. B, HAWTHORNE, CA 90250. VISA or Mastercard (please include expiration date). Add $2.00 postage and handling to order. CA residents add 6½ sales tax.
Apple is a registered trademark of Apple Computer Inc.

Circle 406 on inquiry card.

www.americanradiohistory.com

FULL SIZE KEYBOARD CONVERSION

FOR YOUR ZX-81/ TS-1000

Introductory Priced At

$69.95

Fully Warranteed For 90 Days!

SUN KD-81

If your tired of not knowing if your data got entered or tired of poking data in with one or two fingers, then it's time to upgrade your ZX-81 to a full size, professional, keyboard. The **SUN KD-81 KEYBOARD** offers just that ... all the ease and comfort of inputting your programs and text on a **fast** and **efficient** professional sized keyboard!

KD-81 Features:

- **Full Size Keyboard with 41 Keys**
- **Full Size Space Bar**
- **Allows Touch Typing**
- **Keyboard Case Holds Both Keyboard and Computer**
- **High Impact Plastic Case with Vaporized Metal Shielding**
- **Easy Assembly**
- **Two Color Imprinted Key Tops for Easy Reading**
- **Key Tops have Commands and Graphics Spelled Out for Easy Programming**
- **Measures 10¾" x 7¼" x 2⅛"**

EASY TO INSTALL

- **No Soldering**
- **No Modifications**

Check out these simple instal-lation steps!

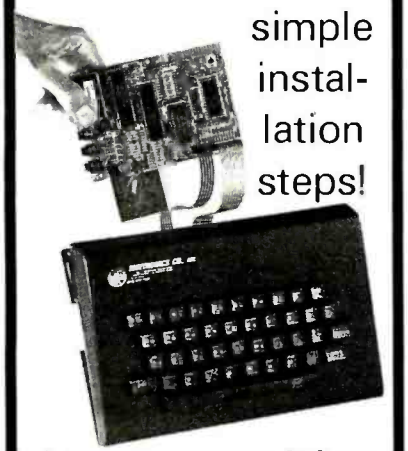

1. Remove 4 screws securing ZX-81 case and remove 2 screws holding ZX-81 PCB.
2. Unplug the 2 ribbon cables from the ZX-81 keyboard.
3. Plug the 2 ribbon cables into the connectors on the KD-81 keyboard.
4. Attach the ZX-81 PCB to the KD-81 case with 2 screws, close case and install remaining 4 screws into the bottom of the KD-81 Keyboard case ...

And enjoy the comfort and ease of inputting your data on a full size keyboard!

16K RAM Module

with "PIGGYBACK" Connector for those EXTRA ADD-ONS

- Steel Case instead of plastic reduces RFI
- RAM Module has lip for mounting on ZX-81 or our KD-81 keyboard that eliminates noise and crash problems due to the "wobbles"
- Built-in output connector for piggyback mounting additional peripherals
- Equivalent to ZX-81 or TS-1000 16K RAM in performance

MX-16 mounted on the ZX-81

All these features And still only..... **$49.95**
32K and 64K available..... **CALL**

SUNTRONICS CO., INC.
12621 Crenshaw Blvd., Hawthorne, CA 90250
STORE HOURS: MON.-FRI. 9:00am to 6:30pm
SATURDAY 10:00am to 5:00pm

CALIFORNIA **213-644-1149** (for Tech Info and Calif. orders)
OUTSIDE CALIFORNIA TOLL FREE **1-800-421-5775** (Order Desk Only)

Mail Order—Minimum Order $10. Send Check or Money Order to: P.O. BOX 1957—Dept. B, HAWTHORNE, CA 90250. VISA or Mastercard (please include expiration date). Add $4.00 postage and handling to order. CA residents add 6% sales tax.

Circle 406 on Inquiry card.

www.americanradiohistory.com

ADVANCED COMPUTER PRODUCTS

SEND $2.00 for 1983 CATALOG

16K Apple™ Ramcard



LIST 195
ACP
$59.95

- Full 1 year warranty
- Top quality — gold fingers
- Expand Apple II 48K to 64K
- Compatible with Z-80 Softcard™
- Allows system to run with CP/M™, PASCAL, DOS 3.3, COBAL, Visicalc, etc.
- Supplied with extra 16K RAM & has (2) LED's

32K STATIC RAM

2 or 4 MHz Expandable Uses 2114L's

16K 4 MHz Kit	$159.95
16K 4 MHz A&T	$129.95 217.95
32K 4 MHz Kit	~~289.95~~
• 32K 4 MHz A&T	• 339.00
BARE BOARD	39.95
Bare Bdw/allparts less mem.	99.95

64K CMOS RAMCARD

IEEE Compatible
Uses Low Power 6116 IC's
5Volt Single Supply
Assm and Tested
$299.00

REPEAT OF SELL-OUT
58 Key Unencoded Keyboard

$19.95 ea.

This is a new 58 key terminal Keyboard manufactured by a major manufacturer. It is uncoded with SPST keys unattached to any PC board. Solid molded plastic 11" x 4" base.

Unencoded Key Pad

15 key Keypad with 1-10 keys and tab, return,(–), (.) and ().
$9.95 ea.

INTEL 4K STATIC RAMS

Super Fast!
Super Low Power!
Part No. 2147 ..... **$1.95 ea.**

STEPPER MOTOR



Operates by applying 12VDC in one direction and then reversing polarity (or square wave). Uses 12VDC. Clock Wise Rotation. Rated 3 RPM at 4 P.P.S. with a 5 degree stepping angle.

ACP PRICE
$3.95 ea. 10 for $34.95

UV "EPROM" ERASER

Model DE-4
$89.95
Holds 4 EPROM's at a time.
Model S-52T **$325.00**

RS232 SIGNAL TESTER

COEX RS232 Line Tester
(7) LED Indicators
only **$24.95**
Other Styles Also Available

16K Memory Expansion Kits for Apple/TRS-80

8 pcs 4116 16K 200/250nS
Specify computer **$12.95**
CALL FOR VOLUME PRICING

INTEL CODEC IC

P/N 2910A
For Digital Voice
$9.95 ea.
For Filter P/N 2912A ... $4.95 ea.

CORCOM FILTER

Popular CORCOM Filter
6 amps **$4.95**
Compatible Line Cord Add ... $3.50

SURGE SUPPRESSOR "Surgeonics" Power Sentry

15 Amps 250 Volts transient suppression
ACP Low Price **$39.95**

Astec RF Modulator

for COLOR & B/W
P/N 1082 Channel 3 or 4 $6.95

CONNECTORS

DB25P (RS232)	$3.25
DB25S Female	3.75
Hood	1.25
Set with Hood, Sale	7.50
22/44 S/T, KIM	2.95
43/86 S/T, MOT	6.50
50/100 S-100 Connector W/W	4.95
50/100 S-100 Connector S/T	3.95

AMD MODEM IC

P/N AM7910
1200Baud
5 Volts
Special ACP Price **$99.00**

PARALLEL ALPHA NUMERIC PRINTER

19 Column Printer prints 16 numerical columns plus 3 columns which have math, alpha and other notations. Each wheel has 12 positions with position 12 blank. Position 11 on numerical columns have decimal point or #. Utilizes 2.75" wide adding machine tape and a dual color ink ribbon. Input data parallel with four bit BCD comparator circuit (schematic provided). Printrate, 3 lines per second. Operating voltage 22-28VDC with typical cycle time of 340mS. Size 6½"W x 3⅛"H x 5⅝"Dp. New. **$9.95 ea. 3/$27**

MICROPROCESSORS

Z8001	$99.00	8008-1	$14.95	6802P	14.95
Z8002	69.00	2901	9.90	8035	14.95
Z80	9.95	2901A	14.95	8039	12.95
Z80A	11.95	9900JL	49.95	8073N	34.95
F-8 (3850)	16.95	8502	9.95	8755	49.95
2650	16.95	6502A	16.95	8748	49.95
1802	9.75	IM6100	29.95	6809	30.00
8080A	4.75	5600	11.75	8086	48.95
8085	14.95	6800B	19.95	68000	129.95

RAMS

CALL FOR QTY PRICING

6116/2016	$7.95	2147	$5.99	5290	$1.99
8264-64K	5.95	411	5.99	5298	1.49
4116-2	1.99	414	4.69	6508	4.50
4116-2	8/12.95	1101	.99	6518	6.79
2101	3.99	1103	.99	6561	3.79
2102	.79	4027	4.69	6604	3.99
21L02-2	1.49	4044	3.99	6605	7.99
21L02-4	1.29	4050	4.69	9130	8.99
2111	3.49	4060	4.69	9140	8.99
2112	3.49	4096	3.99	93415	6.99
2114	1.99	4115	1.49	93425	6.99
2114L-2	3.25	4200	7.95		
2114L-4	2.29	4402	1.99		
2125	6.99	5280	4.60		

64K only $5.95

SUPPORT

8155	$9.95	8259	$8.95	68047	$22.95
8156	9.95	8275	19.95	68488	19.95
8202	29.95	8279	9.50	46505	22.95
8205	2.69	6810	4.75	6520	6.95
8212	2.75	6820	6.50	6522	9.95
8214	4.95	6821	6.50	6530-X	24.95
8216	2.75	6828	10.50	6532	17.95
8224	2.95	6834	16.95	6551	19.95
8226	2.95	6845	22.95	Z80-PIO	6.50
8228	3.95	6847	27.95	Z80A-PIO	9.50
8243	9.50	6850	5.25	Z80-CTC	6.50
8250	14.95	6852	5.25	Z80A-CTC	9.50
8251	8.50	6860	10.95	Z80-DMA	19.95
8253	11.95	6862	10.95	Z80A-DMA	27.95
8255	4.50	6875	5.95	Z80-SIO	24.95
8257	9.50	6880	2.49	Z80A-SIO	29.95

MOS PROMS

2764 (8Kx8) TS	$69.95	2708 (450nS)	$5.75
2732 (4Kx8) TS	12.95	2708 (650nS)	5.25
2716/2516: 5V		1702A	5.75
(2Kx8) TS	7.95	MM5203AQ	14.50
TMS2716, 5V, 12V	17.95	MM5204Q	9.95
2758, 5V, (450nS)	3.50		

HI-TECH

2513-001(5V) Upper	$9.50	DAC08	$9.95
2513-005(5V)Lower	10.95	DAC100	9.95
2513-ADM3 (5V) Lower	14.95	8038 FunctionGenerator	4.50
MCM66710 ASCII Shifted	12.95	MC4024VCO	2.95
MCM66740 Math Symbol	13.95	LM566VCO	1.95
MCM6670 AlphaControl	13.45	XR2206 FunctionGenerator	5.25
1771-01 5" & MiniFloppy	24.95	TMS6027B (5V,12V)	3.95
1781 DataFloppy	29.95	AY51013 (5V, 12V)	4.95
1791-01 Dual Floppy	36.95	AY51014A/1612 (5-14V)	6.95
1791-02 Dual Floppy	44.95	AY51015A/1863 (5V)	6.95
1793DD.DS Floppy	44.95	IM6402	7.95
1797DD.DS Floppy	54.95	IM6403	8.95
1691 Data Separator	18.95	2350USRT	9.95
2143 Clock Generator	18.95	1671B Astros	24.95
8700 8 bit Binary	13.50	MC14411	11.95
8701 10 bit Binary	22.00	4702	14.95
8703 8 bit TS	13.50	WD1941	9.95
9400 Von le Fred Conv	7.25	CDM5016	16.95
8750 3½ Digit BCD	13.95	INS8250	15.95
1408L6 6 bit	3.95	AY5-2378	13.75
1408L8 8 bit	5.95	AY5-3600	13.75
DAC01 D to A	5.95	MM5740AAC	8.95

SOCKETS

LOW PROFILE SOCKETS (TIN)

	1-24	25-49	50-100
8 pin LP	.16	.15	.14
14 pin LP	.20	.19	.18
16 pin LP	.22	.21	.20
18 pin LP	.29	.28	.27
20 pin LP	.34	.32	.30
22 pin LP	.29	.27	.24
24 pin LP	.39	.37	.36
28 pin LP	.45	.44	.43
40 pin LP	.60	.59	.58

3L WIREWRAP SOCKETS (GOLD)

	1-24	25-49	50-100
8 pin WW	.55	.54	.49
10 pin WW (Tin)	.65	.63	.58
14 pin WW	.75	.73	.67
16 pin WW	.80	.77	.70
18 pin WW	.95	.90	.81
20 pin WW	1.15	1.08	.99
22 pin WW	1.45	1.35	1.23
24 pin WW	1.35	1.26	1.14
28 pin WW	1.60	1.53	1.38
40 pin WW	2.20	2.09	1.89

LINEAR

78H05K	$5.95	LM1414N	$1.90
78M06	1.49	LM1458CN/N	.49
78M.G.	1.49	MC1488N	.99
LM108AH	2.95	MC1489N	.99
LM300H	.99	LM1496N	.89
LM301CN	.35	LM1556N	1.50
LM304H	1.98	LM1820N	.95
LM305H	1.89	LM1850N	.95
LM306H	3.25	LM1889N	3.10
LM307CN	.29	LM2111N	1.75
LM308CN	.98	LM2900N	.99
LM309K	1.49	LM2901N	2.50
LM310CN	1.25	LM2917N	2.95
LM311D/CN	.89	CA3013T	2.19
LM312H	1.75	CA3018T	1.99
LM317T	1.70	CA3021T	3.49
LM318CN	1.49	CA3023T	2.99
LM319N/H	1.25	CA3035T	2.75
LM320K-XX*	1.35	CA3039T	1.29
LM320T-XX*	1.39	CA3046N	1.29
LM320H-XX*	1.25	LM3053N	1.49
LM323K	4.95	CA3059N	3.19
LM324N	.95	CA3060N	3.19
LM337K	5.95	CA3062N	4.95
LM338K	6.95	LM3065N	1.49
LM339N	.95	CA3080T	1.29
LM340K-XX*	1.75	CA3081N	1.69
LM340T-XX*	1.25	CA3082N	1.69
LM340H-XX*	1.25	CA3083N	1.55
LM344H	1.95	CA3086N	.80
LM348N	1.20	CA3089N	2.99
LM350K	5.60	CA3096N	3.49
LM358CN	.98	CA3097N	1.99
LM360N	1.49	CA3130T	1.30
LM372N	1.95	CA3140T	1.19
LM376N	3.75	CA3146N	2.49
LM377N	2.75	CA3160T	1.19
LM380CN/N	1.25	CA3190N	1.95
LM381N	1.79	CA3410N	.59
LM383T	1.95	MC3423N	1.49
LM386N	1.25	MC3460N	3.95
LM387N	1.40	SG3524N	3.95
LM390N	1.95	CA3600N	3.39
NE531V/T	3.75	LM3900N	.59
NE555V	.39	LM3905N	1.19
NE556N	.98	LM3909N	.98
NE561T	19.95	LM3914N	3.75
NE565N/H	1.25	LM3915N	3.95
NE566H/V	1.75	LM3916N	3.75
NE567V/H	1.50	RC4131N	2.95
NE592N	2.75	RC4136N	1.10
LM702H	1.99	RC4151N	3.70
LM709N/H	.29	RC4194TK	4.95
LM710N/H	.75	RC4195TK	5.40
LM711N/H	.39	ULN2001	1.25
LM715N	1.95	ULN2003	1.50
LM723N/H	.65	SN75450N	.59
LM733N/H	.98	SN75451N	.35
LM739N	1.15	SN75452N	.49
LM741CN/H	.33	SN75453N	.49
LM741CN-14	.19	SN75454N	.49
LM747N/H	.75	SN75491N	.89
LM748N/H	.39	SN75492N	.89
LM760CN	2.95	SN75493N	.89
LM1310N	1.90	SN75494N	.89
MC1330	1.95	TL494CN	4.20
MC1350	1.95	TL496CP	1.65
MC1358	1.75		

74S00

74S00	$ .39	74S124	3.69	74S244	$2.99
74S02	.43	74S133	.54	74S251	1.35
74S03	.45	74S134	.66	74S253	1.35
74S04	.52	74S135	1.15	74S257	1.29
74S05	.52	74S136	1.69	74S258	1.29
74S08	.49	74S138	1.29	74S260	.75
74S09	.49	74S139	1.29	74S280	2.79
74S10	.42	74S140	.73	74S287	2.99
74S11	.42	74S151	1.29	74S288	2.55
74S15	.42	74S153	1.29	74S373	3.10
74S20	.42	74S157	1.29	74S374	3.10
74S22	.42	74S158	1.29	74S387	2.75
74S30	.42	74S160	2.79	74S471	7.95
74S32	.49	74S174	1.49	74S472	7.95
74S38	1.19	74S175	1.49	74S473	7.95
74S40	.49	74S188	2.69	74S474	9.95
74S51	.42	74S194	1.89	74S475	9.95
74S64	.46	74S195	1.89	74S570	5.75
74S65	.46	74S196	1.69	74S571	5.75
74S74	.69	74S240	2.75	74S572	8.95
74S86	.72	74S241	2.75	74S573	8.95
74S112	.72	74S242	2.99	74S940	2.90
74S113	.72	74S243	2.99	74S941	2.90
74S114	.72				

DIP SWITCHES



2 Position	$ .99	7 Position	$1.39
4 Position	1.19	8 Position	1.49
5 Position	1.29	9 Position	1.65
6 Position	1.35	10 Position	1.69

MUFFIN® FAN

The dependable, low cost, largest selling fan for commercial cooling applications.

- 105cfm free air delivery
- 4.68" sq. x 1.50" deep. Weight - 17 oz.

SPECIAL PURCHASE
NEW! **$9.50 ea.**

SUPER IC CLOSEOUT SPECIALS

1411	$7.95	6571A	$6.95	8080A CPU	$2.95
74LS668	3/1.99	SIG 2652	3.95	2102 RAM	.75
74LS377	2/1.99	8253	6.95	4060 RAM	1.40
74LS241	2/1.99	2758 EPROM	2.95	2732	6.95
8259	6.95	1802	8.95	UPD410	2.98
6561 RAM	2.95	Z80A CPU	4.95	UPD411	2.98
LM733CN	3/1.99	6522	6.95	2708 EPROM	8/29.95
LM323K	3.95	6502 CPU	5.95	2114	8/14.50
5027 CRT	$9.95
---	---
2901	3.95
8039	3.95
MM5320	5.99
9131 RAM	1.99
EMM4402	1.99
10415	4.95
8700 A/D	2/16.95

7400

7400	$ .19	7475	$ .35	74161	$ .88
7401	.22	7476	.34	74162	.89
7402	.22	7479	4.60	74163	.87
7403	.22	7480	.49	74164	.87
7404	.22	7482	.95	74165	.87
7405	.23	7483	.55	74166	1.20
7406	.35	7485	.65	74167	1.95
7407	.35	7486	.35	74170	1.69
7408	.26	7489	1.75	74172	4.75
7409	.23	7490	.39	74173	.79
7410	.22	7491	.57	74174	.89
7411	.29	7492	.45	74175	.85
7412	.29	7493	.45	74176	.75
7413	.39	7494	.69	74177	.75
7414	.59	7495	.65	74179	1.34
7416	.29	7496	.69	74180	.75
7417	.29	7497	2.90	74181	1.75
7420	.22	74100	2.90	74182	.75
7421	.35	74107	.32	74184	2.25
7422	.29	74109	.37	74185	2.25
7423	.29	74116	1.95	74188	9.95
7425	.29	74121	.29	74188	3.90
7426	.29	74122	.39	74190	1.15
7427	.25	74123	.59	74191	1.15
7429	.45	74125	.39	74192	.85
7430	.23	74126	.44	74193	.85
7432	.29	74128	.59	74194	.85
7437	.25	74132	.69	74195	.68
7438	.29	74136	.75	74196	.85
7439	.29	74139	.95	74197	.85
7440	.19	74141	.79	74198	1.39
7441	.79	74142	2.95	74199	1.39
7442	.57	74143	2.95	74221	1.19
7443	.95	74144	2.95	74251	.95
7444	.95	74145	.62	74273	1.05
7445	.79	74147	1.95	74276	1.89
7446	.79	74148	1.20	74279	.75
7447	.65	74150	1.09	74283	1.40
7448	.79	74151	.67	74284	3.90
7450	.19	74152	.67	74285	3.90
7451	.19	74153	.67	74290	1.25
7453	.19	74154	1.19	74298	.95
7454	.19	74155	.78	74365	.68
7459	.25	74156	.78	74366	.68
7460	.23	74157	.69	74367	.68
7470	.29	74158	1.65	74368	.68
7472	.29	74159	2.49	74390	1.45
7473	.34	74160	.88	74393	1.90
7474	.34			74490	1.90

74LS00

74LS00	$ .26	74LS113	$ .43	74LS245	$2.20
74LS01	.28	74LS114	.43	74LS247	1.10
74LS02	.28	74LS122	.55	74LS248	1.10
74LS03	.28	74LS123	1.19	74LS249	1.19
74LS04	.35	74LS124	1.35	74LS251	1.40
74LS05	.28	74LS125	.83	74LS253	1.40
74LS08	.28	74LS126	.92	74LS257	.85
74LS09	.35	74LS132	.79	74LS258	.98
74LS10	.28	74LS136	.49	74LS259	2.95
74LS11	.39	74LS138	.85	74LS260	.65
74LS12	.33	74LS139	.85	74LS261	2.49
74LS13	.47	74LS145	1.25	74LS266	.59
74LS14	.95	74LS148	1.49	74LS273	1.75
74LS15	.33	74LS151	.79	74LS275	4.40
74LS20	.26	74LS153	.79	74LS279	.59
74LS21	.33	74LS154	1.70	74LS283	.99
74LS22	.33	74LS155	1.19	74LS290	.99
74LS26	.33	74LS156	.99	74LS293	.99
74LS27	.33	74LS157	.85	74LS295	1.10
74LS28	.33	74LS158	.75	74LS298	1.19
74LS30	.26	74LS160	1.05	74LS324	1.75
74LS32	.33	74LS161	1.15	74LS347	1.95
74LS33	.55	74LS162	1.05	74LS348	1.95
74LS37	.45	74LS163	1.05	74LS352	1.19
74LS38	.39	74LS164	1.19	74LS353	1.19
74LS40	.26	74LS165	.89	74LS363	1.49
74LS42	.79	74LS166	2.48	74LS365	.69
74LS47	.79	74LS168	1.15	74LS366	.69
74LS48	.95	74LS169	1.15	74LS367	.69
74LS51	.26	74LS170	1.99	74LS368	.69
74LS54	.29	74LS173	.89	74LS373	1.89
74LS55	.29	74LS174	.89	74LS374	1.89
74LS73	.45	74LS175	.89	74LS375	.89
74LS74	.42	74LS181	2.20	74LS377	1.95
74LS75	.59	74LS190	1.15	74LS385	1.95
74LS76	.45	74LS191	1.15	74LS386	.65
74LS78	.45	74LS192	.98	74LS390	1.95
74LS83A	.79	74LS193	.98	74LS393	1.95
74LS85	1.19	74LS194	1.15	74LS395	1.70
74LS86	.45	74LS195	.95	74LS399	2.35
74LS90	.57	74LS196	.89	74LS424	2.95
74LS92	.75	74LS197	.89	74LS668	1.75
74LS93	.75	74LS221	1.15	74LS670	2.29
74LS95	.68	74LS240	1.69	81LS95	1.69
74LS96	.98	74LS242	1.69	81LS96	1.69
74LS107	.45	74LS243	1.69	81LS97	1.69
74LS109	.45	74LS244	1.49	81LS98	1.69
74LS112	.43				

VOLUME PRICING CALL TOLL FREE

CMOS

4000	$ .35	4037	$1.95	4089	$2.95
4001	.35	4040	1.29	4093	.99
4002	.35	4041	1.25	4094	2.95
4006	1.05	4042	.95	4098	2.29
4007	.25	4043	.85	4099	2.25
4008	1.39	4044	.85	14408	12.95
4009	.45	4046	1.75	14409	12.95
4010	.45	4047	1.25	14410	12.95
4011	.35	4048	.99	14412	12.95
4012	.25	4049	.45	14415	8.95
4013	.45	4050	.69	14419	4.95
4014	1.39	4051	1.10	4501	.39
4015	1.15	4052	1.10	4502	1.65
4016	.59	4053	1.10	4503	.69
4017	1.19	4055	3.95	4505	8.95
4018	.89	4056	.95	4506	.75
4019	.45	4059	9.25	4507	.95
4020	1.10	4060	1.39	4508	3.75
4021	1.19	4066	.75	4510	1.19
4022	1.15	4069	.35	4511	1.19
4023	.29	4070	.49	4512	1.39
4024	.75	4071	.35	4515	2.75
4025	.25	4072	.35	4516	1.45
4027	.85	4073	.35	4518	1.39
4028	.85	4075	.35	4520	1.25
4029	1.29	4076	1.29	4555	4.95
4030	.45	4077	.35	4556	.99
4031	3.25	4078	.35	4566	2.25
4032	2.15	4081	.35	80C95	1.50
4034	3.25	4082	.35	80C97	1.25
4035	.95	4085	1.95		

TOLL FREE 800-854-8230
TWX 910-595-1565

Mail Order: P.O. Box 17329 Irvine, CA 92713
Retail: 1310B E. Edinger, Santa Ana CA 92705 (714) 558-8813
542 W. Trimble, San Jose, CA 95131 (408) 946-7010

TERMS: MO, Cashier's Check, Bank Wire. Personal checks allow 2 weeks for Processing. Include Drivers License and credit card # s Visa, AMEX, CB add 3% service charge. Add 3% shipping & handling or $2.50, whichever is greater. Add 10% for foreign orders or US Parcel Post. Include Telephone number. NO CODs Prices subject to change without notice. Some items subject to prior sale. We reserve the right to substitute manufacturer. Retail prices may vary.

Circle 8 on Inquiry card.

www.americanradiohistory.com

ADVANCED COMPUTER PRODUCTS

SEND $2.00 for 1983 CATALOG

IBM

NOW AVAILABLE FREE IBM PC Catalog

Vista Computer Company

apple computer Authorized Dealer

SIEMEN'S SALE

You can now purchase Shugart compatible 8" Disk Drives below your existing factory direct pricing!

These Prices are the lowest ever published.

***Siemen's SSDD FDD100-8 ... $199.00**

Also, with purchase of Disk Drives you can buy the Vista V-1000 Dual Case with Power Supply and Cable for only $375.00..... Regular Price $495.00

OFFER LIMITED! FACTORY WARRANTY 90 DAYS!

SHIPPED IMMEDIATELY FROM STOCK! *OEM QUANTITIES

See Special Offer on this page for additional disk savings!

S-100 64K "CMOS" RAMCARD

Unbelieveable Price!

$299.00

Assembled and Tested

- ☐ ACP has sold over 1000 of these IEEE compatible, low-priced, high-reliability 64K Static RAMC ards.
- ☐ Single 5-Volt operation.

LPS II

Light Pen System for Apple II Computers

ACP Price $299.00

IBM LOW COST MEMORY

MEMORY PLUS AT LOW PRICES!

Now "Multicard" expandable from 64 - 256K with

(1) PARALLEL (1) SERIAL (1) CLOCK/CALENDAR

P/N V-064PSC with 64K $199.00

P/N V-256PSC with 256K $335.00

COEX

COEX 80-FT

Best of all, the price . . .

only $299.00

Optional COEX Interface Card to Apple $39.95

MODEMS

	List	ACP
SIGNALMAN Mark I (RS232)	$99	$79
HAYES		
Smartmodem (RS232)	289	225
Smartmodem 1200	699	549
IBM PC to Modem Cable	40	30

FLOPPY DISK DRIVES

MFG	P/N	1	2	10	MFG	P/N	1	2	10
SINGLE-SIDED 8"									
Shugart	SA801R	$385	$379	$269	Tandon	848-1	$369	$362	$353
Siemens	FDD100-8	199	199	Call					
DOUBLE-SIDED 8"									
Shugart	SA851R	519	495	469	Siemens	FDD200-8	399	389	379
Qume	Datatrack 8	515	490	465	Tandon	848-2	479	475	469
Shugart	860 Thin	559	539	519					
SINGLE-SIDED 5¼"									
Shugart	SA400	210	208	198	Tandon	TM100-1	205	198	195
MPI	B51	210	208	198	Pertec	FD200	149	149	139
DOUBLE-SIDED 5¼"									
Shugart	SA450	345	325	313	Tandon	TM100-2	289	265	259
Pertec	FD250	159	159	149					
DOUBLE-SIDED 5¼" Thinline									
TEAC	5¼" Thinline	375	365	359	Qume	5¼" Thinline	375	365	359
DOUBLE-SIDED 3"									
Hitachi		Call	Call	Call					
WINCHESTERS 5¼"									
Seagate	ST506(6Mb)	699	679	599	Seagate	ST512(12Mb)	990	975	949
IMI	5006(6Mb)	865	850	819	IMI	5012(12Mb)	1088	1070	1020
IMI	5018(18Mb)	1313	1299	1225					

SPECIAL LIQUIDATION - SMALL QTY

SHUGART 4004 14" WINCHESTER

Only 10 Available —So Hurry!

14.5 MEGABYTES

List 2495.00

Special Sale Price ... $995.00

HARDWARE

	List	ACP
ABM		
BSR-X10 Interface	$95	$85
Color to Mono I/O Module	95	85
Telephone Receptionist adapt	995	875
PS3276/Bisyn Emulator	1295	1150
AMDEK		
Dual3" Amdisk (2) Hitachi DS (250K)	899	649
AST Megaplus" Card		
P/N MG-064, 64K, Ser, Clk	595	449
P/N MG-064SP, add'l Ser, Par	695	499
P/N MG-256, 256K, Ser, Clk	995	695
P/N MG-256SPadd'l Ser, Par	1095	749
AST I/O Plus" Card		
P/N I/O-SP, Clk, (2) Ser, Par	265	199
AST Combo Plus" Card		
P/N MC256SPC 256K, clk, P/S	995	695
AST PC Disk++" Card		
P/N MD-064, 64K, Host, Par	655	495
CACTUS TECHNOLOGY		
200 Baud Direct Modum	349	299
COEX		
Extender Card	40	19
Prototype Card	69	42
37 Pin "D" Connector	19	8
Snap-in Card Guides (5)	8	5
CORONA Hard Disk System		Call
CORVUS Hard Disk System		Call
DAVONG		
5Mb Hard Disk	1995	1490
12Mb Hard Disk	2495	2295
MAYNARD Disk Drive Card		
Floppy Card w/Parallel	295	249
Floppy Card w/Serial	325	260
ORCHID		
Hi-Res Graphics Adapter	495	429
PERSYST Spectrum (64-256K)		
P/N SP64-CCP, 64K, S, S, P		499
P/N SP64, 64K		375
64K Upgrade Kit (9 chips)	130	50
QUADRAM Quadboard (64-256K)		
P/N Q64, 64K w/4 functions	595	429
TANDON		
TM 100-1 (160K)	295	195
TM 100-2 (320K)	395	289
TG PRODUCTS		
Joystick	65	49
Track Ball	65	52
VISTA "Multicard"" (exp. 64-256K)		
P/N V-064, 64K	295	199
P/N V-064PSC 256K w/PSC	495	335
64K Upgrade Kit (9 chips)		50
"MAXICARD"" 576K	1295	999
"PC MASTER"" 7 I/O's	669	495
"8" Disk Controller"		Call
XEDEX		
Baby Blue CP/M	600	445

PRINTERS

COEX 80F/T 80cps	$499	$299
STAR MICRONICS - NEW!		
Gemini 10 100cps	499	379
Gemini 15 15"	649	479
EPSON		
MX80 III	645	429
MX80F/T III	745	499
MX100 III	995	679
INTEGRAL DATA		
Microprism 480	799	689
Prism 80 Color (all)	1795	1495
Prism 132 Color (all)	1995	1685
BROTHER HR-1	1195	895
Daisywriter	1495	1295
IBM PC to EPSON Cable	60	45
OKIDATA		
Microline 82A	599	489
Microline 83A	899	729
Microline 84AP	1399	1099

MONITORS

AMDEK CORP		
300 Green 12"	$199	$155
310 Amber 12"	210	175
Color I Composite	399	339
Color II RGB Hi-Res	899	790
Color III RGB Comm'l	499	445
Color IV RGB Analog	1299	1059
NEC 12" Green -NEW	199	155
12" RGB (690 x 230)	895	799
SONY Profeel 19" Color RGB	895	819
PRINCETON GRAPHICS		
RGB IBM Lookalike	700	599

DISKETTES

DYSAN 5¼" SS SD	10/$55	$38
DYSAN 5¼" DS SD	10/65	48
IBM 5¼" SS SD	10/60	43
IBM 5¼" SS DD	10/65	47
VERBATIM 525-01 SS	10/45	23
VERBATIM 550-01 DS	10/55	34
MAXELL MD1 SS	10/50	29
MAXELL MD2 DS	10/60	39
AMDEK Hitachi 3"DS Micro	5/99	49
BULK SPECIAL SS With Sleeve and Box	10/25	19
	100/195	149

MORE IBM GOODIES

CURTIS PC Pedestal	$80	$65
Extension Cable	50	44
INTEL 8087 IC		199
RAM EXPANSION		
16K Motherboard (16 IC's)		19
64K Memory Exp. (9 IC's)		50
KRAFT IBM Joystick	70	49
IBM Paddles	50	40

APPLE System Saver FAN

Surge Suppressor Fan, Double Outlet Receptacle $79.95

"SOLO" Apple II/IIe Compatible Disk Drive

Totally compatible to Apple Drives.

only $249.00

Controller $99.00

Just plug in and run.

Vista Quartet



Equivalent to 4 Apple Drives

only . . .

$699.00

Add 8" Disk Drives To Your Apple II/IIe

Up To 2.4 Megabyte!

Now "TRIMLINE V1100" with Tandon Thinline DS DD Drives.

Tandon Dual DS DD..... $1895.00

Qume Dual DS DD 1699.00

Shugart Dual801R 1295.00

SPECIAL OFFER

(2) Siemen's 8" Disk Drives

(1) Vista V-1000 Enclosure

(1) Power Supply w/Fan, w/Cable

ACP Low Price $699.00

Apple Compatible Software

SAVE UP TO 40%

BUSINESS		**HOBBY**	
Screen Writer	$29	Bag of Tricks	$32
Word Handler	149	Graphics Magic'n	45
BD Master	155	DOS Boss	19
Visicalc" 3.3	185	Zoom Graphics	32
Master Type	29	Utility City	22
Desk Top Plan II	179	Locksmith 4.0	90
Desk Top Plan III	225	Compl Graph Sys	55
Visiplot	159	Apple Mechanic	24
PFS, File I	115	Nibbles Away II	35
FPS, File III	155	**GAMES**	
Visitrend/Visiplot	25	The Missing Ring	29
PFS, Graph II	115	Choplifter	26
PFS, Graph III	155	Frogger	24
Multiplan	199	Wizardy	39
Versaform	279	Snack Attack	24
Wordstar	365	Castle Wolfenstien	24
Format II	179	Arcade Machine	44
dBASE II	439	Canyon Climber	24
Supercalc	169	Aztec	29
PFS, Report II	95	Mask of the Sun	29
PFS, Report III	115	Cannonball Blitz	26
Acct Plus G/L	299	Knight Diamonds	26
G/L, A/P, A/R	599	Zork I	29
Above+Inventory	799	Zork III	29
Magic Window	115	Starcross	29
HOME		Serpentine	25
Home Accountent	59	Star Blazer	25
Transend I	76	Deadline	39
Transend II	119	Tubeway	25
Data Capture 4.0	49	Flight Simulator	25
Visiterm	89	Space Vikings	25
Per. Finance Mgr	85	Sargon II	29
ASCII Exprs. Prof.	99	Spitfire Simulator	29
Electronic Duet	25	Apple Panic	22
Tax Prep. 1983	149	Olympic Decath	23

APPLE HARDWARE

	List	ACP
Apple II Plus w/48K	$1530.00	$999.00
Apple II Plus w/64K	1729.00	1049.00
Apple II System Special w/64K, Z80 Card, Vision 80	2519.00	1499.00
Apple III w/128K	3495.00	2695.00
Apple III w/256K	4295.00	2995.00
ProFile Hard Disk Drive	3499.00	2095.00
Vista Apple II Timecard	195.00	169.00
"Apple Products Available In-store Only"		
Apple IIe Disk II w/Controlr	$645.00	$449.00
Apple II Disk II w/o	525.00	389.00
Apple Family System	2495.00	CALL
Prototype Card	24.00	21.95
IEEE-488 Interface	450.00	375.00
Extended Warranty - 1 yr	225.00	199.00
Super Serial Card	195.00	174.95
Language Card	195.00	149.95
Graphic Tablet w/IO	795.00	695.00
"Available In-store Only"		

MORE HARDWARE

	List	ACP
MICROSOFT		
Z80 Softcard	$395.00	$249.00
16K Ramcard	195.00	89.00
The Premium Package	899.00	579.00
SSM		
AIO-II4 Function Serial/ Parallel	225.00	179.00
AIO Serial/Parallel	195.00	165.00
KEYBOARD COMPANY		
Numeric Keypad	149.95	124.95
Apple II Joystick	49.95	44.50
Apple II Handcontrollers	29.95	25.95
KRAFT		
Joystick		49.00
Hand Controller		40.00
PROMETHEUS		
VERSAbox Spool/Buff	249.00	199.00
VERSAcard Four-in-1	199.00	166.00
AUTO-DOC diagnostics	99.00	82.00
VISTA COMPUTER CO.		
Vision 80 80x24 Card	395.00	269.00
Vision 40-40 col. enhance	199.00	149.00
Vision 20 Lo case ROM	29.95	25.00
A800 8" DS, DD	595.00	399.00
Quartet Disk Drive		699.00
Duet Disk Drive		499.00
Solo Disk Drive		269.00
40 Char Type-ahead	49.95	35.00
Wild Card	129.95	115.00
VIDEX		
Videoterm 80x24 Card	345.00	279.00
Keyboard Enhancer II	149.00	129.00
Soft Switch	35.00	30.00
Function Strip Keys	79.00	69.00
PRACTICAL PERIPHERALS		
16K Microbuffer	259.00	220.00
32K Microbuffer	299.00	253.00
Snapshot Option	149.00	109.00
VOTRAX		
Type n' Talk Speech	375.00	339.00
SCOTT INSTRUMENTS		
Voice Recognitn VET80	799.00	675.00
CORVUS		
5 Mb Hard Disk	3750.00	2495.00
10 Mb Hard Disk	5350.00	2895.00
20 Mb Hard Disk	6450.00	3995.00
ORANGE MICRO		
The Grappler I/O (Plus)	195.00	129.95
SATURN SYSTEMS		
32K RAM Card	239.00	189.00
64K RAM Card	425.00	355.00
128K RAM Card	599.00	505.00
NOVATION		
Apple-Cat II	389.00	329.00
Apple-Cat 212	625.00	525.00
HAYES MICROCOMPUTER		
Hayes Chronograph	249.00	229.00
Micromodem II	349.00	289.00
Smartmodem	299.00	229.00
MOUNTAIN COMPUTER		
CPS Multifunction	239.00	169.00
Music System	395.00	335.00
A/D plus D/A	350.00	299.00
Supertalker	199.00	169.00
Introl X-10 Controller	200.00	175.00
ROM Plus	155.00	129.00
Keyboard Filter ROM	55.00	44.00
Copy ROM	55.00	44.00
ROM Writer	175.00	159.00
M&R ENTERPRISES		
Sup'term 80x24 Card	395.00	279.00
Sup'r Switcher 6 Amp Power Supply	295.00	239.00
Sup'r Mod II RF Modulator	69.00	49.00
Apple Fan	55.00	43.00
ALS		
The CP/M Plus Z80 card	399.00	299.00
Smarterm 80x24 Card	349.00	279.00
The Synergizer Package	699.00	549.00

16K RAM CARD

Apple II 16K

Compatible with

Z80 Softcard™ ... PASCAL CP/M™

Full 1 year Warranty. Top Quality by COEX

NEW LOW PRICE $59.95

Also from COEX NEW EPSON Parallel Interface for Apple.

With cable..... $39.95

TOLL FREE 800-854-8230

TWX 910-595-1565

Mail Order: P.O. Box 17329 Irvine, CA 92713

Retail: 1310B E. Edinger, Santa Ana CA 92705 (714) 558-8813

542 W. Trimble, San Jose, CA 95131 (408) 948-7010

TERMS: MO, Cashier's Check, Bank Wire. Personal checks allow 2 weeks for processing. Include Drivers License and credit card #'s Visa, AMEX, CB add 3% service charge. Add 3% shipping & handling or $2.50, whichever is greater. Add 10% for foreign orders or US Parcel Post. Include Telephone number. NO CODs. Prices subject to change without notice. Some items subject to prior sale. We reserve the right to substitute manufacturer. Retail prices may vary.

Circle 8 on Inquiry card.

www.americanradiohistory.com

California Digital

Post Office Box 3097 B • Torrance, California 90503

★ FREE ★

Plastic library case supplied with all diskettes purchased from California Digital

$19.95

New Low Price

Private labeled for California Digital by one of the most respected producers of magnetic media. Each diskette is certified double density at 40 tracks. To insure extended media life all diskette are manufactured with a reinforced hub.
Each box of diskettes is supplied with a free plastic library case.
Soft sector CAL-501, Ten sector CAL-510

5¼" DISKETTES WITH LIBRARY CASE

$26.50

Your Choice
SCOTCH
MEMOREX
VERBATIM

Single Side Double Density

	Soft Sector	10 Sector	16 Sector	
SCOTCH	744D-0	744D-10	744D-16	26.50
MEMOREX	3481	3483	3485	26.50
VERBATIM	525-01	525-10	NA	26.50
MAXELL	MO1	MH1-10	MH1-16	29.85
DYSAN	104/1D	107/1D	NA	45.00

Double Side Double Density

SCOTCH	745-0	745-10	745-16	42.50
VERBATIM	550-01	550-10	NA	42.50
MAXELL	MD2-D	MH2-10D	MH2-16D	45.00
DYSAN	104/2D	107/2D	NA	49.50
DYSAN 96	204/2D	NA	NA	59.50

EIGHT INCH DISKETTES

Single Side Single Density			Single Side Double Density		
SCOTCH	740-0	29.50	SCOTCH	741-0	39.00
MEMOREX	3060	29.50	MEMOREX	3090	35.00
DYSAN	3740/1	39.50	DYSAN	3740/0	57.50
Thirty Two Sector			**Double side Double Density**		
SCOTCH	740-32	29.50	SCOTCH	743-0	47.50
Scotch Head Cleaning Kits 5¼ & 8"		$24.95	MEMOREX	3114	39.50
Plastic Library Cases 5¼ & 8"		2.95	DYSAN	3740/2D	65.00
Diskette Flip Tabs Mfg diskettes 5¼"					
Diskette Flip Tabs Mfg diskettes 8"					

Microswitch ASCII KEYBOARD $79

Each keyboard contains 81 high reliability Hall Effect keys.
Outputs seven bit parallel ASCII MIC-81SD5 3 Lbs.

HITEK KEYBOARD $24.95

This Hitek keyboard is the same unit used by Lear Siegler in their middle line CRT terminals. The keyboard features 58 unencoded metal on metal contacts (HIK-58). Matching numeric cluster with 15 keys is available for $9.95 (HIK-15). Buy both of these units for only $29.90 and save $5.00 (HIK-5815).

MEMORY

16K DYNAMIC	2732 EPROM
1.95	**4.95**
4116 150ns.	450ns.
64K DYNAMIC	**16K STATIC**
6.95	**4.95**
4164 150ns.	6116 200ns.

2764 EPROM SALE $9.95

DYNAMIC MEMORY

		1-31	32+	100+
4027-1K dynamic 250ns	ICM-4027250	1.99	1.85	1.75
4116 150ns. 16K	ICM-4116150	1.95	1.85	1.75
4116 200ns. 16K	ICM-4116200	1.75	1.65	1.50
4164 150ns. 64K 128 refresh	ICM-4164150	6.95	6.50	5.90
41256 150ns. 256K	ICM-41256150	Available March83		

STATIC MEMORY

2102 L0 200ns. 1K static	ICM-2102200	1.49	1.29	1.15
2102 L0 250ns. 1K static	ICM-2102250	1.29	1.15	.99
2112 450ns. 2K static	ICM-2112450	2.99	2.85	2.75
2114 300ns. 1K x 4	ICM-2114300	1.95	1.85	1.75
4044 TMS 150ns. 4K x 1	ICM-4044150	3.49	3.25	2.99
5257 300ns. 4K x 1	ICM-5257300	2.50	2.25	1.99
6116 P4200ns. 2K x 8	ICM-6116200	1.95	1.80	1.65
6116 P3 150ns. 2K x 8	ICM-6116150	5.95	5.75	5.60
6167/2167 100ns. 16K x 1 (20pin)	ICM-6167100	8.95	8.50	7.90

EPROMS

2708 450ns. 1K x 8	ICE-2708	4.95	4.75	4.55
2716 450ns. 2K x 8	ICE-2716	4.95	4.75	4.55
2716 TMS 350ns. Tri-voltage	ICE-2716TMS	7.95	7.65	7.25
2732 450ns. 4K x 8	ICE-2732	4.95	4.75	4.55
2732 350ns. 4K x 8	ICE-2732350	8.50	8.00	7.60
2532 450ns. 4K x 8	ICE-2532	10.50	9.90	9.50
2764 350ns. 8K x 8	ICE-2764	10.95	10.50	9.95
27128 350ns. 16K x 8	ICE-27128	Available March83		

CONNECTORS

S-100 Gold $2.95

DB25P

$2.50

GOLD EDGE CONNECTORS

	each	10+
S-100 .125" centers		
Imsai solder .250" row	$2.95	$2.50
Imsai wire wrap (FI)	3.95	3.50
Sullins Hi-Rel. .250"	4.50	4.00
Sullins Hi-Rel. WW	5.35	4.80
Sullins / Altair .140"	4.95	4.50
.156" Centers (standard)		
22/44 Kim Eyelet	2.50	2.15
36/72 Digital Group S/T	5.95	5.50
36/72 Digital Group WW	6.60	6.15
43/86 Motorola 6800 S/T	6.60	6.15
43/86 Moto. 6800 WW	7.00	6.65

INTEGRATED CIRCUIT SOCKETS

	Low Profile		Wire Wrap	
	each	100+	each	100+
8 pin	$.10	$.09	$.16	$.14
14 pin	.10	.09	.45	.40
16 pin	.12	.11	.50	.45
18 pin	.15	.13	.66	.61
24 pin	.26	.24	.84	.67
40 pin	.42	.40	1.60	1.17

"D" Type

	each	10-24	25+
DE9P male	$1.60	$1.40	$1.30
DE9S female	2.25	2.00	1.90
DE hood	1.40	1.30	1.20
DA15P male	2.35	2.15	2.00
DA15S female	3.25	3.10	2.90
DA hood 2/1	1.60	1.50	1.30
DB25P male	2.70	2.35	2.25
DB25S female	4.25	3.15	3.05
DB hood 2/1	1.15	1.15	1.00
DC25P male	4.20	4.00	3.70
DC25S female	6.00	5.75	5.50
DC hood 2/1	2.25	2.00	1.75
DD50P male	5.30	5.10	4.75
DD50S female	11.40	8.80	8.00
DD50 hood 2/1	2.60	2.40	2.10

CENTRONICS

57-30360	7.95	6.75	5.75

RIBBON CABLE CONNECTORS

17/36 5" disk	4.85	4.15	3.95
20/40 TI99-4/A	5.85	5.05	4.70
25/50 8" disk	5.90	5.15	4.90

23" COMPOSITE MONITOR $159

Ideal monitor for classroom demonstrations.

Every try gathering a classroom of students around a 12" monitor? Here is your opportunity to purchase a 23" high resolution monitor at a reasonable price.
These units accept standard composit video signals generated by most personal computers including the Apple and IBM. Attach it your computer and in second you are shooting down Klingons in wide screen video.
MOT-BW23 35 Lbs. Monitors are Open frame and for safety should be enclosed. Wood grained enclosure for above $35.00 additional CAL-ENC23 15 Lbs.

Eight Inch Single Sided

	One	Two	Ten
SHUGART SA801R	$395	385	375
SIEMENS FDD100-8	259	259	225
TANDON 848-1 SLIMLINE	379	369	359
Eight Inch Double Sided			
SHUGART SA851R	525	495	475
QUME DATA TRACK 8	525	495	475
MITSUBISHI M2894-63	485	475	469
OLIVETTI 802/851	369	359	349
TANDON 848-2 SLIMLINE	495	485	475
SHUGART 860 THINLINE	569	549	539
Five Inch Single Sided			
SHUGART SA400	215	209	199
TANDON TM 100-1	209	199	195
Five Inch Double Sided			
SHUGART SA450	349	329	315
TANDON TM 100-2	295	269	259
TANDON 96TPI TM100-4	369	355	350
OLIVETTI 502 ⅔ height	239	225	215
Three Inch Rigid Floppy			
HITACHI-AMDEK	call for pricing		
Five Inch Winchesters			
SEAGATE 506 6 Megabyte	759	725	695
SEAGATE 512 12 Megabyte	995	960	960
TANDON 603SE 14 Megabyte	995	960	895
WESTERN DYNAX removable	995	960	950

Upon request, all drives are supplied with power connectors and manual

$750 *Eight Inch Subsystem*

Two Siemens FDD100-8 disk drives with power suppry, 4" exhaust fan complete with all necessary power cables.

Same as above but with:

Shugart 801R	MSD2801	$1195	Olivetti 802	CAL2802	$1250
Shugart 851R	MSD2851	1450	Qume DT8	MSD8DT	1450

ECLIPSE 100 $695

INDUSTRIAL S-100 MAINFRAME

Suitable for hospital and industrial applications. Constructed from 304 brushed stainless steel. Modualar 500 watt torold power supply provides +8 volts at 30 Amps and ±16 volts at 4 Amps. Supplied with standard 18 slot Faraday mother board. Auxilary switched AC receptacles. The Eclipse 100 can be either table or rack mounted. Provisions for Internally mounting a ten megabyte Winchester disk drive.
The Eclipse 100 is the perfect mainframe to fill the void left by the now defunct TEI Corporation. EPS-100 50 lbs.

VISA

master charge

Shipping: First five pounds $3.00. Each additional $.50.
Foreign orders: 10% shipping. Excess will be refunded.
California residents add 6½% sales tax. COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a "strong" Dun & Bradstreet.

TOLL FREE ORDER LINE
(800) 421-5041
TECHNICAL & CALIFORNIA
(213) 679-9001

www.americanradiohistory.com

California Digital

Post Office Box 3097 B • Torrance, California 90503

Super Buy $239

SIEMENS FDD100-8 8" DISK DRIVE

10 Drives $209 • 100 Drives $175

California Digital has recently participated in the purchase of several thousand Siemens FDD 100-8 floppy disk drives. These units are electronically and physically similar to that of the Shugart 801R. Any application that will accept the Shugart will work with the Siemens FDD 100-8.
All units are new and shipped in factory sealed boxes. Because of the extremely low price we expect a quick sell out. SEA-F1008 17 lbs. Manual and power connectors supplied free upon request. Also available: Two drive subsystem supplied in metal enclosure with power supply and exhaust fan. $750.00 CAL-2F1008.

MORROW DESIGNS MICRO DECISION

$1195

Includes $1800 worth of free software:

Buy before month end and California Digital will supply, free of any additional cost, 50 Diskettes and a 5¼" Flip & Fite.

- Digital Research 2.2 CP/M
- MicroPro Wordstar
- Electronic Spreadsheet
- NorthStar Bazic
- Spelling Checker
- Microsoft Basic 80

The Morrow Micro Decision offers one of the best values in small business computers. Standard features include 64K of RAM, 4MHz Z 80 CPU, two RS232 serial ports, dual density floppy disk controller capable of supporting four disk drives, and a 200 Kilobyte 5¼" disk drive. The unit is powered by a low noise switching power supply.
The low profile enclosure should blend in to most any office environment. The Micro Decision is delivered complete with CP/M 2.2 as well as Basic 80 and Wordstar. Available options include a second disk drive and a video terminal. MDS-MD1 18 lbs.

PRINTERS

ECLIPSE 80FT

$297

MATRIX PRINTERS

Star Gemini-10 friction & tractor 100char/sec. parallel	STR-G10	359.00
Star Eclipse 80FT friction & tractor	STR-E80FT	297.00
Okidata 82A serial & parallel 9½" paper	OKI-82A	459.00
Okidata 83A serial & parallel 15" paper	OKI-83A	695.00
Okidata 84A serial & parallel 15" paper	OKI-84A	1079.00
Okidata2350 (new) 350 char/sec	OKI-2350	1995.00
Epson MX80FT with graphtrax, friction & tractor feed	EPS-MX80FT	519.00
Epson MX100 with graphtrax, 15" paper	EPS-MX100	695.00
NEC8023A parallel 9½" paper, graphics	NEC-8023A	485.00
Anadex 9500A high speed 15" paper	ADX-9500A	1279.00
Anadex 9501A high speed w/graphics	ADX-9501A	1279.00
Datasouth 180 high speed 180cps 15	DSI-180	1295.00
Quantex 7030 correspondence quality 180 char/sec	QTX-7030	1535.00
Prowriter 8510 parallel 9½" paper	PRO-8510P	495.00
Prowriter 8510 serial 9½" paper	PRO-8510S	639.00
Prowriter II 15" paper	PRO-2P	750.00
Printronix P300 high speed printer 300 lines per minute.	PTX-P300	4500.00
Printronix P600 ultra high speed 600 lines per minute	PTX-P600	6150.00
Mannesmann Tally 1805 200 char/sec serial	MAN-1805	1650.00

WORD PROCESSING PRINTERS

NEC7710 55char/second, serial interface	NEC-7710	2379.00
NEC7730 same as above only parallel interface	NEC-7730	2379.00
NEC3510 15" serial	NEC-3510	1775.00
Diablo630 40 char/sec. serial	DBL-630	2250.00
Brother HR1 daisywheel	BTH-HR1S	855.00
Brother HR11 serial interface	BTH-HR1S	895.00
Smith Corona TP-1 daisy wheel printer serial	SCM-TP1S	659.00
Starwriter F10 serial	PRO-F10S	1475.00
Starwriter F10 parallel	PRO-F10P	1475.00

EPSON MX80 RIBBONS $6.95

MONITORS

Zenith Z121 green phosphor 12" 80/80 column switch ZTH-c12	115.00
BMC 12A green phosphor 15 Mhz composit video BMC-12A	88.00
BMC 12EN green phosphor 20 Mhz high resolution BMC-12EN	139.00
NEC JB1201 green phosphor 18 Mhz composit video NEC-JB1201	169.00
NEC JB1260 green phosphor commercial grade composit NEC-1260	129.00
Motorola 23" open frame blk/white composit video MOT-BW23	159.00
Motorola 12" open frame blk/white requires horz sync & pow MOT-BW12	69.00
Comrac 9" open frame requires horz sync & power supply CON-BW9	59.00
(COLOR)	
NEC JC1201 composit color NEC-JC1201	325.00
NEC RGB monitor NEC-12020M	875.00
BMC 13" Composit video BMC-1400CL	273.00
BMC 13" RGB color monitor BMC-1401RGB	329.00
BMC interface card for Apple II for above RGB BMC-81RGB	149.00
Comrex/Hitachi 13" RGB high res. monitor COM-6600	539.00
Comrex/Hitachi 13" Composit color monitor COM-6500	395.00
Amdek color #1 composit video AMD-100	349.00
Amdek color #2 high res. RGB color monitor AMD-200	739.00
Amdek color #3 commercial grade color RGB AMD-300	475.00

Direct Connect MODEMS

Universal Data 103LP, line power, answer & originate	UDS-103LP	169.00
Universal Data 103LPJ, auto answer	UDS-103LPJ	209.00
Universal Data 202, 1200 baud, half duplex only	UDS-202LP	209.00
Universal Data 212LP, full 1200 baud duplex, line power	UDS-212LP	450.00
Universal Data 212A, 300/1200 baud, auto answer	UDS-212A	595.00
Hayes Smart Modem 1200, auto answer, auto dial	HYS-212AD	575.00
Hayes Smartmodem, 300 baud only, auto answer, auto dial	HYS-103AD	229.00
Hayes Micromodem II, 103 Apple direct connect	HYS-MM2	279.00
Hayes Micromodem 100, S-100, auto answer, auto dial	HYS-100	319.00
Hayes Chronograph, time& date	HYS-CHR232	199.00
Novation "J" Cat, direct connect, auto answer	NOV-JCAT	119.00
Novation Cat, acoustic connect	NOV-CAT	159.00
Novation "D" Cat, direct connect via handset not phone line.	NOV-DCAT	169.00
Novation SmartCat 103, auto answer, auto dial	NOV-SC103	219.00
Novation SmartCat 103/212, 1200 baud auto dial	NOV-SC212	529.00
Penrel 300/1200 baud, auto log-on,auto dial	PEN-212A	$795.00
Signalman Mark I, direct connect with terminal cable.	SGL-MK1	88.00
U.S. Robotics 212A, 300/1200 baud	USR-212A	485.00

TERMINALS

Freedom 50, split screen, detatchable keyboard	LIB-F50	495.00
Visual 50, detatchable, keyboard selectable settings.	VSL-50	635.00
Visual 50 Green screen	VSL-50G	650.00
Visual 330, emulates DEC, DG, LSI, green	VSL-330G	995.00
Ampex Dialogue 80 green screen, two page, func. keys	APX-D80G	685.00
Ampex Dialogue 80 amber screen, two page, func. keys	APX-D80A	685.00
Wyse 100, horz & vert. split screen, metal enclosure	WYS-100	825.00
Televideo 910 Plus, block mode	TVI-910P	595.00
Televideo 925, detatchable keyboard, 22 function keys	TVI-925	795.00
Televideo 950, graphic char., split screen, 22 func.	TVI-950	985.00
Televideo 970, 14 green screen, 132 column, European	TVI-970	March
Zenith 19 (termrite), VT52 compatible	ZTH-Z19	765.00
ADDS Viewpoint A1 detatchable keyboard	ADD-VP1	585.00
ADDS Viewpoint A2, xycursor	ADD-VP2	585.00

APPLE 48K Plus

$1089

APPLE BRAND PRODUCTS

APL-48P	Apple Plus 48K RAM	
APL-DSK1	Apple disk with controller card	560.00
APL-DSK2	Apple disk without controller card	495.00

XITEN

XTN-G10	Xiten 10 Megabyte Gallium hard disk	1 995.00
XTN-16K	16K RAM card for Apple II	69.00

RANA SYSTEMS

RAN-APL1	Apple add on disk drive with controller	525.00
RAN-APL2	Apple add on drive without controller	395.00

CALIFORNIA COMPUTER SYSTEMS

CCS-7710	Asynchronous Serial Interface	125.00
CCS-7726	Centronics Parallel Interface	95.00
CCS-7720	Apple Parallel Interface	95.00
CCS-7114	12K Rom/Prom Module	115.00
CCS-7424	Calendar/Clock Module	95.00
CCS-7440	Programmable Timer	95.00
CCS-7811B	Arithmetic Processor for Apple II plus	319.00

MOUNTAIN COMPUTERS, INC.

MTN-CPS	CPS Multifunction Card	169.00
MTN-TCLK	Clock/Calendar	
MTN-STLK	Supertalker SD200	149.00
MTN-ROMF	Rom Plus with Keyboard filter	169.00
MTN-ROMRTR	Rom Writer with Eprom socket	145.00
MTN-ADDA	A-D/D-A Converter	269.00
MTN-BSR	X-10 Control Card for BSR system	149.00

MICRO SOFT

MSF-SFTCRD	Microsoft Z-80CPU card	249.00
MSF-16KRAM	Microsoft 16K RAM card	125.00

VISTA

VSA-A800	Vista 8" controller card	469.00
VSA-VIS80	Vista Vision 80	289.00
MCI-CNTRL	Micro Sci disk drive controller	89.00

FOURTH DIMENSION

FDN-SPRDRV	Super Drive-35 track Apple add on	329.00

SORRENTO VALLEY ASSOC

SVA-221	Single sided, single density controller	360.00
SVA-222	Double sided, single density controller	360.00
SVA-223	Single or double sided, double density	475.00

ADVANCED BUSINESS TECH

ABT-13KEYN	13-Key pad for new Apple	95.00

S-100 BOARDS



16 BIT MICROPROCESSORS

GBT-8687	Godbout 8086/8087 Microprocessor board	495.00
GBT-8687	Godbout 8088/8089 dual 8 bit microprocessor	389.00
SEA-8086	Seattle Computer 16 bit micro two board set	669.00
TEC-8086	Tecmar Computer 16bit microprocessor	595.00
LOM-8086	Lomas Data Systems Lighting Quic	call

SINGLE BOARD COMPUTERS

WAV-Bill	Wavemate Bullet 1 with floppy 256K (not S-100)	795.00
AMD-280	Advanced Micro Digital floppy & 64K	750.00
TEL-FDC1	Teletex FDC1 Single board NEC765 controller	675.00

8 BIT MICROPROCESSORS

GBT-Z80	Godbout Z80 8 bit CPU 2A bit extended address	250.00
CCS-2810	California Computer Z-80 microprocessor	275.00
SDS-SBC200	SD Systems SBC-200 Z-80 microprocessor	275.00
MSA-4280	Measurement System Z-80 2810 microprocessor	425.00
TAR-280	Tarbell Electronics Z-80 with two RS232 ports	395.00

FLOPPY DISK CONTROLLERS

GBT-DSK1	Godbout Disk One double density FDC 765	395.00
MDS-D1/2	Morrow Designs Disk Jockey II with CPM	350.00
MDS-D1/1	Morrow Designs Disk Jockey I single density	225.00
CCS-2422	California Computer 2422 with CPM	339.00
TAR-DDC	Tarbell Electronics double density controller	419.00
TAR-SDC	Tarbell Electronics single density controller	279.00

CPM OPERATING SYSTEM

GBT-CPM22	Godbout CPM 22 for Disk One 8 bit operation	160.00
GBT-CPM86	Godbout CPM 86 for Disk One for use with 8088	265.00
GBT-CPM86	Godbout CPM 86 for operation with 8086 board	265.00

HARD DISK CONTROLLER

GBT-DSK2	Godbout Disk II hard disk Controller	695.00
GBT-DSK3	Godbout Disk III hard disk Controller	
MDS-W5/06	Morrow Designs Winchester for Seagate 506	495.00
WDI-1000	Western Digital WD-1000 (not S-100)	395.00

EPROM BOARDS

ADS-PB100	Advanced Digital Prom Blaster 100	275.00
SDS-P100	SD Systems Prom-100 programmer	260.00
SSM-P51	SSM Prom programmer up to 2716	195.00
DGR-P32	Digital Research 32K Epoim read only board	195.00

STATIC MEMORY BOARDS

CAL-SB4	California Digital Static 4K 8/16 bit (6167)	595.00
GBT-R16	Godbout Ram 16 64K memory 8/16 bit	760.00
GBT-R17	Godbout Ram 17 64K memory 8 bit 2 bit add	395.00
GBT-R20	Godbout Ram 20 32K static memory 4K bound	375.00
GBT-R21	Godbout Ram 21 128K 8/16 bit static memory	995.00
CCS-2116	California Computer 2116 16K static memory	335.00

DYNAMIC MEMORY BOARDS

CAL-D256	California Digital 256K dynamic memory 8 bit	495.00
SDS-Ex3	SD Systems Expandoram II 256K dynamic	795.00
CCS-2065	California Computers 2065 64K dynamic	395.00
MSA-DMS64	Measurement Systems DM65/100 (Alpha Micro)	595.00

INTERFACE BOARDS

MDS-SA/1	Morrow Designs Serial board 2 serial 4 parallel	339.00
MDS-MB1/1	Morrow Designs Motherboard 3 serial 2 parallel	375.00
GBT-1S2C	Godbout Interface I 2 serial ports	195.00
GBT-1S2C	Godbout Interface II 1 serial 2 parallel	199.00
GBT-1S5C	Godbout Interface III with 5 serial ports	395.00
GBT-1S4A	Godbout Interface IV with 8 serial ports	595.00
GBT-1S7C	Godbout Interface IV 3 serial 2 parallel	295.00
CCS-2710	California Computer 4 port serial interface	295.00
CCS-2720	California Computer 2 serial / 2 parallel	295.00
CCS-2220	California Computer 4 port parallel	219.00

SPECIAL FUNCTION BOARDS

[illegible]	[illegible]	325.00
[illegible]	[illegible]	139.00
[illegible]	[illegible]	129.00
[illegible]	[illegible]	995.00
[illegible]	[illegible]	395.00
[illegible]	[illegible]	595.00
[illegible]	[illegible]	350.00
[illegible]	[illegible]	539.00
[illegible]	[illegible]	79.00
[illegible]	[illegible]	179.00
[illegible]	[illegible]	149.00
[illegible]	[illegible]	49.00
[illegible]	[illegible]	25.00
[illegible]	[illegible]	25.00
[illegible]	[illegible]	35.00

256K DYNAMIC MEMORY BOARD

$495

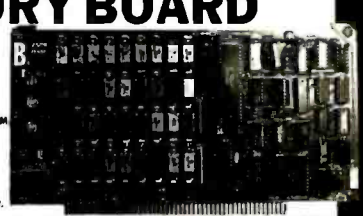

- 256 kilobytes of memory using 64 K dynamic RAM
- Over one megabyte of memory using the new 256k dynamic RAM chips.
- Error detection-trap capability.
- Individual 16K block can be relocated to any boundry within a megabyte of RAM.
- 24 bit addressing and phantom mod capability.

The California Digital 256K RAM board represents an outstanding value in S-100 memory technology. Priced slightly above earlier generation 64K dynamic ram boards it gives you these additional features. 256K of memory with parity. Parity error feature can be jumpered to any of the interrupt lines, a status port, ERROR LED, or IEEE-696 "ERROR signal. 24 or 16 bit addressing with memory management.
Proper operation with front panel equipped systems, DMA disk controllers, and IEEE-696 Temporary Buss Masters assured with an on the board M1 generator for memory refresh timing. CAS and RAS timing is controlled with tapped digital delay lines for proper operation over the entire operating temperature range.
The board is very recent in design using the National Semiconductor DP-8409 RAM Controller chip. Split termination networks are used on all address lines, CAS line, and RAS lines eliminating the last traces of ringing. The board uses two separate voltage regulators. One for the DRAMs and one for the interface logic increasing the noise immunity of the ram array. Typical power dissipation is 8 watts.
Documentation includes theory of operation, configuration guide, a schematic, and application notes on the use of the memory management options. CAL-256K 2 Lbs.

VISA

master charge

Shipping: First five pounds $3.00. Each additional $.50.
Foreign orders: 10% shipping. Excess will be refunded.
California residents add 6½% sales tax. COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a "strong" Dun & Bradstreet.
Warehouse: 15608 Inglewood Blvd. Visitors by appointment.

TOLL FREE ORDER LINE
(800) 421-5041
TECHNICAL & CALIFORNIA
(213) 679-9001

www.americanradiohistory.com

7400

**Number of Pins of each I.C. for easy Socket purchase

Part No.	**Pins	Price
SN7400N	14	.19
SN7401N	14	.19
SN7402N	14	.25
SN7403N	14	.25
SN7404N	14	.25
SN7405N	14	.25
SN7406N	14	.29
SN7407N	14	.29
SN7408N	14	.25
SN7409N	14	.25
SN7410N	14	.25
SN7411N	14	.25
SN7412N	14	.35
SN7413N	14	.35
SN7414N	14	.49
SN7416N	14	.25
SN7417N	14	.25
SN7420N	14	.19
SN7421N	14	.35
SN7422N	14	.45
SN7423N	16	.59
SN7425N	14	.29
SN7426N	14	.29
SN7427N	14	.25
SN7428N	14	.49
SN7430N	14	.25
SN7432N	14	.29
SN7437N	14	.25
SN7438N	14	.29
SN7439N	14	.59
SN7440N	14	.19
SN7441N	16	.89
SN7442N	16	.45
SN7443N	16	.99
SN7444N	16	.99
SN7445N	16	.69
SN7446N	16	.69
SN7447N	16	.69
SN7448N	16	.69
SN7450N	14	.19
SN7451N	14	.19
SN7453N	14	.19
SN7454N	14	.19
SN7459A	14	.25
SN7460N	14	.19
SN7470N	14	.29
SN7472N	14	.29
SN74173N	14	.35
SN74174N	16	.69
SN74175N	16	.69
SN74176N	14	.39
SN74177N	14	.69
SN74178N	16	1.49
SN74180N	14	.69
SN74181N	24	1.95
SN74182N	16	.89
SN74184N	16	1.95
SN74185N	16	1.95
SN74190N	16	.69
SN74191N	16	.69
SN74192N	16	.69
SN74193N	16	.69
SN74194N	16	.69
SN74195N	16	.69
SN74196N	14	.89
SN74197N	14	.89
SN74198N	24	1.19
SN74199N	24	1.19
SN74221N	16	1.19
SN74251N	16	.79
SN74276N	20	1.95
SN74279N	16	.79
SN74283N	16	1.49
SN74284N	16	2.95
SN74285N	16	2.95
SN74365N	16	.55
SN74366N	16	.55
SN74367N	16	.55
SN74368N	16	.55
SN74390N	16	1.49
SN74393N	14	1.49
SN74156N	16	.59
SN74157N	16	.59
SN74160N	16	.69
SN74161N	16	.69
SN74162N	16	.69
SN74163N	16	.69
SN74164N	14	.89
SN74165N	16	.69
SN74166N	16	.89
SN74167N	16	2.79
SN74170N	16	1.29
SN74172N	24	4.95
SN74173N	16	.69
SN74174N	16	.69
SN74175N	16	.69
SN74176N	14	.69
SN74177N	14	.69
SN74179N	16	1.49
SN74180N	14	.69
SN74181N	24	1.95
SN74182N	16	.89
SN74184N	16	1.95
SN74185N	16	1.95
SN74190N	16	.69
SN74191N	16	.69
SN74192N	16	.69
SN74193N	16	.69
SN74194N	16	.69
SN74195N	16	.69
SN74196N	14	.89
SN74197N	14	.89
SN74198N	24	1.19
SN74199N	24	1.19
SN74221N	16	1.19
SN74251N	16	.79
SN74276N	20	1.95
SN74279N	16	.79
SN74283N	16	1.49
SN74284N	16	2.95
SN74285N	16	2.95
SN74365N	16	.55
SN74366N	16	.55
SN74367N	16	.55
SN74368N	16	.55
SN74390N	16	1.49
SN74393N	14	1.49

74LS

74LS00	14	.25	74LS92	14	.55	74LS192	16	.79
74LS01	14	.25	74LS93	14	.55	74LS193	16	.79
74LS02	14	.25	74LS94	16	.69	74LS194	16	.69
74LS03	14	.25	74LS95	16	.69	74LS195	16	.69
74LS04	14	.29	74LS96	16	.89	74LS196	14	.79
74LS05	14	.29	74LS107	14	.39	74LS221	16	.89
74LS08	14	.29	74LS109	16	.39	74LS240	20	1.09
74LS09	14	.29	74LS112	16	.39	74LS241	20	1.09
74LS10	14	.29	74LS113	14	.39	74LS242	14	1.09
74LS11	14	.35	74LS114	14	.39	74LS243	14	1.09
74LS12	14	.35	74LS122	14	.49	74LS244	20	1.09
74LS13	14	.39	74LS123	16	.79	74LS245	20	1.49
74LS14	14	.59	74LS125	14	.49	74LS247	16	1.09
74LS15	14	.35	74LS126	14	.49	74LS248	16	1.09
74LS20	14	.29	74LS132	14	.59	74LS249	16	1.09
74LS21	14	.29	74LS133	16	.59	74LS251	16	.59
74LS22	14	.29	74LS136	14	.39	74LS253	16	.59
74LS27	14	.29	74LS138	16	.59	74LS257	16	.59
74LS28	14	.35	74LS139	16	.59	74LS258	16	.59
74LS30	14	.29	74LS151	16	.59	74LS260	14	.59
74LS32	14	.35	74LS153	16	.59	74LS266	14	.69
74LS33	14	.55	74LS154	24	.99	74LS273	20	1.49
74LS37	14	.35	74LS155	16	.69	74LS279	16	.49
74LS38	14	.35	74LS156	16	.69	74LS283	16	.69
74LS40	14	.29	74LS157	16	.69	74LS290	14	.89
74LS42	16	.55	74LS158	16	.59	74LS293	14	.79
74LS47	16	.75	74LS160	16	.69	74LS295	14	.89
74LS48	16	.75	74LS161	16	.69	74LS352	16	1.29
74LS49	16	.75	74LS162	16	.69	74LS353	16	1.29
74LS51	14	.25	74LS163	16	.69	74LS365	16	.49
74LS54	14	.25	74LS164	14	.69	74LS367	16	.49
74LS55	14	.29	74LS165	16	1.19	74LS368	16	.49
74LS73	14	.39	74LS168	16	1.19	74LS373	20	1.29
74LS74	14	.39	74LS169	16	1.19	74LS374	20	1.29
74LS75	16	.39	74LS170	16	1.49	74LS375	16	.69
74LS76	16	.39	74LS173	16	.69	74LS386	14	.45
74LS78	14	.39	74LS174	16	.69	74LS393	14	1.19
74LS83	16	.65	74LS175	16	.69	74LS399	16	1.49
74LS85	16	.65	74LS181	24	2.49	74LS670	16	1.49
74LS86	14	.39	74LS190	16	.89	81LS95	20	1.49
74LS90	14	.55	74LS191	16	.89	81LS97	20	1.49

74S/PROMS*

74S00	14	.35	74S124	16	2.95	74S243	14	2.49
74S02	14	.35	74S133	16	.45	74S244	20	2.49
74S03	14	.45	74S134	16	.50	74S251	16	1.19
74S04	14	.45	74S135	16	.69	74S253	16	1.19
74S05	14	.45	74S136	14	1.39	74S257	16	1.19
74S08	14	.39	74S138	16	.89	74S258	16	1.19
74S09	14	.39	74S139	16	.89	74S260	14	.79
74S10	14	.35	74S140	14	.55	74S280	14	1.95
74S11	14	.35	74S151	16	.99	74S287*	16	1.95
74S15	14	.35	74S153	16	.99	74S288*	16	1.95
74S20	14	.35	74S157	16	.99	74S373	20	2.49
74S22	14	.35	74S158	16	.99	74S374	20	2.49
74S30	14	.35	74S157	16	.99	74S387*	16	1.95
74S32	14	.45	74S158	16	.99	74S471*	20	5.95
74S38	14	.89	74S160	16	2.49	74S472*	20	4.95
74S40	14	.39	74S174	16	.99	74S473*	20	4.95
74S51	14	.35	74S175	16	.99	74S474*	24	4.95
74S64	14	.39	74S188*	16	1.49	74S475*	24	4.95
74S65	14	.39	74S194	16	1.49	74S570*	16	2.95
74S74	14	.55	74S195	16	1.49	74S571*	16	2.95
74S86	14	.55	74S196	14	1.49	74S572*	16	4.95
74S112	16	.55	74S240	20	2.25	74S573*	18	4.95
74S113	14	.55	74S241	20	2.25	74S940	20	2.49
74S114	16	.55	74S242	14	2.49	74S941	20	2.49

CA—LINEAR

CA3010H		.99	CA3060N	16	3.25	CA3089N	16	1.69
CA3013H		2.15	CA3080E	8	.89	CA3096N	16	1.19
CA3023H		3.25	CA3080E	16	.89	CA3130E	8	1.49
CA3035H		5.95	CA3081N	16	1.49	CA3140E	8	.99
CA3039H		1.35	CA3082N	16	1.49	CA3160H		1.95
CA3046N	14	.89	CA3083N	16	1.49	CA3401N	14	.59
CA3059N	14	3.25	CA3086N	14	.69	CA3600N	14	3.95

CD—CMOS

CD4000	14	.29	CD4040	16	.79	CD4098	16	1.95
CD4001	14	.29	CD4041	14	.79	CD4506	16	1.19
CD4002	14	.29	CD4042	16	.69	CD4507	14	.39
CD4006	14	.89	CD4043	16	.79	CD4508	24	3.95
CD4007	14	.29	CD4044	16	.79	CD4510	16	.89
CD4009	16	.39	CD4046	16	.89	CD4511	16	.89
CD4010	16	.39	CD4047	14	.89	CD4512	16	.89
CD4011	14	.29	CD4048	16	.39	CD4514	24	1.79
CD4012	14	.15	CD4049	16	.39	CD4515	24	1.79
CD4013	14	.39	CD4050	16	.39	CD4516	16	.99
CD4014	16	.79	CD4051	16	.79	CD4518	16	.99
CD4015	16	.39	CD4052	16	.79	CD4519	16	.39
CD4016	14	.39	CD4053	16	.79	CD4520	16	.79
CD4017	16	.75	CD4056	16	2.95	CD4526	16	1.19
CD4018	16	.79	CD4059	24	7.95	CD4528	16	1.19
CD4019	16	.39	CD4060	16	.89	CD4529	16	1.19
CD4020	16	.75	CD4066	14	.39	CD4543	16	1.19
CD4021	16	.79	CD4068	14	.39	CD4562	14	6.95
CD4022	16	.79	CD4069	14	.29	CD4565	16	1.39
CD4023	14	.29	CD4070	14	.39	CD4583	16	2.49
CD4024	14	.69	CD4071	14	.29	CD4584	14	.59
CD4025	14	.23	CD4072	14	.29	CD4723	16	1.19
CD4026	16	2.49	CD4073	14	.29	CD4724	16	1.19
CD4027	16	.45	CD4075	14	.29	MC14409	16	13.95
CD4028	16	.69	CD4076	16	.79	MC14410	16	13.95
CD4029	16	.79	CD4078	14	.49	MC14411	24	11.95
CD4030	14	.39	CD4081	14	.29	MC14412	16	13.95
CD4034	24	1.95	CD4082	14	.29	MC14419	16	7.95
CD4035	16	.89	CD4093	14	.49	MC14433	24	13.95
(More in Catalog)						MC14538	16	1.19
						MC14541	14	1.19

MICROPROCESSOR COMPONENTS

MICROPROCESSOR CHIPS

Part No.	**Pins	Function	Price
CDP1802	40	CPU	$9.95
2650	40	MPU	14.95
TMP3901ADC	40	MPU — 4-bit slice (Com. Temp. Gr.)	19.95
MC6502	40	MPU w/Clock (65K bytes mem.)	9.95
MC6802CP	40	MPU w/Clock and RAM	7.95
INS8035N-6	40	MPU — 8-bit (6MHz)	5.95
INS8039N-6	40	CPU-Sgl. chip 8-bit (128 bits. Ram)	5.95
INS8040N-6	40	CPU (256 bytes RAM)	5.95
INS8070N	40	CPU (64 bytes RAM)	11.95
INS8073N	40	CPU w/Basic Micro Interpreter	14.95
P8085A	40	CPU	5.95

Z80, Z80A, Z80B, Z8000 SERIES

Z80	40	CPU(MK3880N)(Z80C)2MHz	$4.95
Z80-CTC	28	Counter Timer Circuit	5.95
Z80-DART	40	Dual Asynchronous Rec./Trans	11.95
Z80-DMA	40	Direct Memory Access Circuit	15.95
Z80-PIO	40	Parallel I/O Interface Controller	5.95
Z80-S10/0	40	Serial I/O (Tx CB and Rx CB Bonded)	15.95
Z80-S10/1	40	Serial I/O (Lacks DTRB)	15.95
Z80-S10/2	40	Serial I/O (Lacks SYNCB)	15.95
Z80-S10/9	40	Serial I/O	15.95
Z80A	40	CPU(MK3880N-4)(Z80C-1) 4MHz	5.95
Z80A-CTC	28	Counter Timer Circuit	5.95
Z80A-DART	40	Dual Asynchronous Rec./Trans	11.95
Z80A-DMA	40	Direct Memory Access Circuit	17.95
Z80A-PIO	40	Parallel I/O Interface Controller	5.95
Z80A-S10/0	40	Serial I/O (Tx CB and Rx CB bonded)	16.95
Z80A-S10/1	40	Serial I/O (Lacks DTRB)	16.95
Z80A-S10/2	40	Serial I/O (Lacks SYNCB)	16.95
Z80A-S10/9	40	Serial I/O	16.95
Z80B	40	CPU(MK3880N-6)6MHz	11.95
Z80B-CTC	28	Counter Timer Circuit	13.95
Z80B-PIO	40	Parallel I/O Interface Controller	13.95
Z8001	48	CPU Segmented	51.95
Z8002	40	CPU Non-Segmented	55.95
Z8030	40	Serial Comm. Controller	44.95
Z8036	40	Counter/Timer & Parallel I/O Unit	29.95

6800/68000 SERIES

MC6800	40	MPU	4.95
MC6802CP	40	MPU with clock and RAM	7.95
MC6810API	24	128x8 Static RAM	3.95
MC6821	40	Peripheral Interf. Adapt (MC6820	4.95
MC6828	24	Priority Interrupt Controller	15.95
MC6830L8	24	1024x8-bit ROM (MC68A30-8)	10.95
MC6850	24	Asynchronous Comm. Adapter	4.95
MC6852	24	Synchronous Serial Data Adapter	5.75
MC6860	24	0-600bps Digital MODEM	9.95
MC6862	24	2400bps Modulator	12.95
MC6880A	16	Quad 3-state bus Trans. (MC8T26)	2.25
MC68000L8	64	MPU 16-bit (8MHz)	69.95
MC6848P	40	General Purpose Int'L. Adapter	8.95
MC6852P2	40	Multi. Protocol Comm. Controller	24.95
MC6861PB	28	Enhanced Prog. Comm. Int'l. Adapter	8.95

8080A SERIES

INS8080A	40	CPU	3.95
TMS5501	40	Synchronous Data Interface (SIRC)	14.95
INS8154	40	128 Byte RAM 16 Bit I/O	13.95
INS82C06	20	Octal D Flip Flop Tri-State (74C374)	2.49
DP8212	24	8 bit Input/Output (74S412)	2.25
DP8214	24	Priority Interrupt Control	3.95
DP8216	16	Bi-Directional Bus Driver	2.25
DP8224	16	Clock Generator/Driver	2.25
DP8226	16	Bus Driver	2.25
DP8228	28	System Cont./Bus Driver (74S428)	3.49
DP8238	28	System Controller (74S438)	4.49
INS8243	24	I/O Expander for 48 Series	5.95
INS8245	18	16 Key Keyboard Encoder (74C922)	4.49
INS8246	20	20 Key Keyboard Encoder (74C923)	4.95
INS8247	28	Display Controller (74C911)	8.95
INS8248	28	Display Controller (74C912)	8.95
INS8250N	40	Asyn. Comm. Element (INS8250)	10.95
DP8251	28	Prog. Comm. I/O (USART)	4.49
DP8253	24	Prog. Interval Timer	6.95
DP8255	40	Prog. Peripheral I/O (PPI)	4.49
DP8257	40	Prog. DMA Control	7.95
DP8259	28	Prog. Interrupt Control	6.95
DP8275	40	Prog. CRT Controller	29.95
DP8279	40	Prog. Keyboard/Display Interface	6.95
DP8303	20	8-bit Tri-State Bi-Directional Trans	3.95
DP8304	20	8-bit Bi-Directional Receiver	2.49
DP8307	20	8-bit Bi-Directional Receiver	2.49
DP8308	20	8-bit Bi-Directional Receiver	2.49
DP8310	20	Octal Latched Peripheral Driver	4.95
DP8311	20	Octal Latched Peripheral Driver	4.95

MICROPROCESSOR MANUALS & DATA BOOKS

M-Z80	User Manual	7.50
M-COP1802	User Manual	7.50
M-2650	User Manual	5.00
10400	1982 Intel Data Book (1405 pg.)	14.95
30001	1981 Nat. CMOS Book (628 pg.)	6.95
30002	1980 Nat. Linear Book (640 pg.)	6.95
30003	1982 Nat. Linear Book (1952 pg.)	11.95
30005	1981 Nat. TTL Book (624 pg.)	9.95
30008	1980 Nat. Memory Data Book (464 pg.)	6.95
30011	1980/81 Nat. Linear Applications (736pg.)	15.95
30013	1983 Zilog Data Book (641 pg.)	7.95
205610	1981 Intel Peripheral Design (878 pg.)	9.95

DYNAMIC RAMS

Part No.	**Pins		Price
1103	18	1024x1 (300ns)	.99
4027	16	4096x1 (250ns)	2.49
4116N-2	16	16,384x1 (150ns)	1.89 - 8/14.95
4116N-3	16	16,384x1 (200ns)	1.69 - 8/12.95
4116N-4	16	16,384x1 (250ns)	1.49 - 8/10.95
4164N-150	16	65,536x1 (150ns)	7.95 - 8/59.95
4164N-200	16	65,536x1 (200ns)	7.49 - 8/54.95
MM5261	18	1024x1 (300ns)	.49 - 8/1.95
MM5262	22	2048x1 (365ns)	.49 — 8/1.95
MM5270	18	4096x1 (250ns) MK4095	4.95
MM5280	22	4096x1 (200ns) 2107	3.95
MM5290-2	16	16,384x1 (150ns)	1.89 - 8/14.95
MK5290-3	16	16,384x1 (200ns)	1.69 - 8/12.95
MK5290-4	16	16,384x1 (250ns)	1.49 - 8/10.95
MM5298-3	16	8192x1 (200ns)	1.69

STATIC RAMS

1101	16	256x4 (650ns)	1.49
2101	22	256x4 (450ns) 8101	2.49
2102	16	1024x1 (350ns)	.89
2L02	16	1024x1 (450ns) L.P.	1.49
2111	18	256x4 (450ns) 8111	2.95
2112	18	256x4 (450ns) MOS	2.95
2114	18	1024x4 (450ns)	1.95 - 8/13.95
2114L	18	1024x4 (450ns) L.P.	2.25 - 8/15.95
2114-2	18	1024x4 (200ns)	2.25 - 8/15.95
2114L-2	18	1024x4 (200ns) L.P.	2.49 - 8/17.95
2141-3	18	4096x1 (150ns)	3.95
2147	18	4096x1 (70ns)	4.95
2148	18	1024x4 (70ns)	8.95
TMS4044	18	4096x1 (450ns)	3.95
TMS4045	18	1024x4 (450ns)	3.95
5101	22	256x4 (450ns) CMOS	4.95
MM5257	18	4096x1 (450ns) 4044	4.95
HM6116P-3	24	2048x8 (150ns) CMOS	7.95
HM6116-4	24	2048x8 (200ns) CMOS	6.95
HM6116LP-4	24	2048x8 (200ns) L.P. CMOS	7.95
7489	16	16x4 (50ns) 3101	2.25
74C920	22	256x4 (250ns) CMOS (6551)	3.95
74C921	18	256x4 (250ns) CMOS	3.95
74C929	18	1024x1 (250ns) CMOS (6501)	3.95
74C930	18	1024x1 (250ns) CMOS (6518)	3.95
74S189	16	16x4 (30ns) 93405	1.95
TMS200	16	256x1 (80ns) 93410	3.95
TMS206	16	256x1 (60ns) 93411	3.95
TMS289	16	16x4 (35ns) 3101	2.25
82S10	16	1024x1 (50ns) O.C. (93415)	2.95
82S25	16	16x4 (50ns) O.C. (74S289)	2.25

EPROMS

1702A	24	256x8 (1us)	4.95
2708	24	1024x8 (450ns)	4.95
2708-6	24	1024x8 (550ns) SMOO246	2.95
TMS2516	24	2048x8 (450ns) 2716	6.95
TMS2532	24	4096x8 (450ns) NMC2532	9.95
TMS2564	28	8192x8 (450ns)	19.95
TMS2716	24	2048x8 (450ns) 3 voltage	7.95
2716	24	2048x8 (450ns)	4.95
2716-1	24	2048x8 (350ns)	6.95
2732	24	4096x8 (450ns)	9.95
27S80	24	1024x8 (450ns) single +5V	2.95
NM2764	28	8192x8 (450ns)	16.95
MM2764-3	28	8192x8 (350ns)	19.95

PROMS

74S188	16	32x8 PROM O.C. (6330-1)	1.49
74S287	16	256x4 PROM T.S. (6301-1)	1.95
74S288	16	32x8 PROM T.S. (6331-1)	1.95
74S387	16	256x4 PROM O.C. (6300-1)	1.95
74S471	20	256x8 PROM T.S. (6309-1)	5.95
74S472	20	512x8 PROM T.S. (6349-1)	4.95
74S473	20	512x8 PROM O.C. (6348)	4.95
74S474	24	512x8 PROM T.S. (DM87S296N)	4.95
74S475	24	512x8 PROM O.C. (6340)	4.95
74S478	24	1024x8 PROM T.S. (TBP28S86)	8.95
74S570	16	512x4 PROM O.C. (6305)	2.95
74S571	16	512x4 PROM T.S. (6306)	2.95
74S572	18	1024x4 PROM T.S. (6352)	4.95
74S573	18	1024x4 PROM T.S. (82S137)	4.95
82S23	16	32x8 PROM O.C. (27S18)	2.95
82S115	24	512x8 PROM T.S. (27S15)	9.95
82S123	16	32x8 PROM T.S. (27S19)	2.95
82S126	16	256x4 PROM O.C. (27S20)	3.95
82S129	16	256x4 PROM T.S. (27S21)	3.95
82S130	16	512x4 PROM O.C. (27S12)	5.95
82S181	18	1024x4 PROM T.S. (TBP24S81)	9.95
DM87S180N	24	1024x8 PROM O.C. (82S180)	9.95
DM87S181N	24	1024x8 PROM T.S. (82S181)	9.95
DM87S184N	18	2048x4 PROM O.C. (82S184)	9.95
DM87S185N	18	2048x4 PROM T.S. (82S185)	9.95
DM87S190N	24	2048x4 PROM O.C. (82S190)	19.95
DM87S191N	24	2048x8 PROM T.S. (82S191)	19.95

DATA ACQUISITION

DC10		Mostek DC/DC Convert. +5V to -5V	7.95
MC3479P	18	Floppy Disk Read AMP System	4.95
MC1408L7	16	7-bit D/A Converter (DAC0807LCN)	2.95
MC1408L8	18	8-bit D/A Converter (DAC0808LCN)	3.95
ADC0804	20	8-bit A/D Converter (1 LSB)	3.49
DAC0806	16	8-bit D/A Converter (0.78% Lin.)	1.95
ADC0809	28	8-bit A/D Converter (8-Ch. Multi.)	4.49
AY-5-1013A	40	30K Baud Uart (TR1602)	4.95

CONNECTORS

DB25 — D Subminiature (meets RS232)

Part No.	Description	Price
DE9P	9 Pin Plug	$1.79
DE9S	9 Pin Socket	1.95
DA15P	15 Pin Plug	1.95
DA15S	15 Pin Socket	2.95
DB25P	25 Pin Plug (Meets RS232)	2.49
DB25S	25 Pin Socket (Meets RS232)	3.25
DB25P-831	25 Pin Right Angle Plug	4.95
DB25S-831	25 Pin Right Angle Socket	5.25
DC37P	37 Pin Plug	4.95
DC37S	37 Pin Socket	5.95
DD50P	50 Pin Plug	5.95
DD50S	50 Pin Socket	6.95

Accessories

DE-9H	Hood for DE-9 Series Connectors	$1.10
DA-15H	Hood for DA-15 Series Connectors	1.20
DB25H	Hood for DB25 Series Connectors	1.25
DC37H	Hood for DC37 Series Connectors	1.39
DD50H	Hood for DD50 Series Connectors	1.49
D20418-2	2 screws for mtg. connectors to a panel	.79

Solder Eyelet/Wire Wrap Edge Card

Part No.	Cnts.	Sp.	Description	Price
15/30SE	15/30	.156	Solder Eyelet	$1.79
18/35SE	18/35	.156	Solder Eyelet	1.95
22/44SE	22/44	.156	Solder Eyelet	2.49
22/44WPC	22/44	.156	PC type (no mtg. ears)	.99
50/100SE	50/100	.125	Solder Eyelet	4.95
22/44WW	22/44	.156	Wire Wrap - Level 3	4.95
67031-5	22/44	.156	WW (Pins .062Sx.03x.75)	3.95
R-881-1	50/100	.125	Wire Wrap - Level 2	7.95
R-881-2	50/100	.125	Wire Wrap - Level 1	6.95

RF Coaxial Connectors

Part No.	Description	Price
PL259	UHF Plug	$ .89
SO239	UHF Panel Receptacle	.89
PL258	UHF Straight Adapter	.89
UG175/U	UHF Reducing Adapter	.89
UG88/U	BNC Plug	1.49
UG89/U	BNC Jack	1.69
UG306/U	BNC Angle Adapter	2.49
UG260/U	BNC Plug	1.49
UG1094/U	BNC Bulkhead Receptacle	.89

IC SOCKETS

For Socket Required, See Column After The IC Part No.

LOW PROFILE (TIN) SOCKETS

	1-9	10-99	100-999
8 pin LP	.16	.14	.13
14 pin LP	.17	.15	.14
16 pin LP	.19	.17	.16
18 pin LP	.26	.24	.23
20 pin LP	.30	.27	.25
22 pin LP	.31	.28	.26
24 pin LP	.33	.30	.28
28 pin LP	.40	.37	.35
36 pin LP	.46	.42	.39
40 pin LP	.51	.46	.43

— Soldertail Standard Tin & Gold Also Available —

WIRE WRAP (GOLD) SOCKETS LEVEL #3

	1-9	10-99	100-999
8 pin WW	.49	.45	.42
10 pin WW	.65	.62	.59
14 pin WW	.65	.62	.59
16 pin WW	.69	.65	.61
18 pin WW	.89	.85	.79
20 pin WW	1.09	1.05	.99
22 pin WW	1.25	1.19	1.15
24 pin WW	1.29	1.23	1.18
28 pin WW	1.59	1.50	1.45
36 pin WW	1.85	1.75	1.69
40 pin WW	1.99	1.89	1.79

$10.00 Minimum Order — U.S. Funds Only
California Residents Add 6½% Sales Tax
Shipping — Add 5% plus $1.50 Insurance
Send S.A.S.E. for Monthly Sales Flyer!

Spec Sheets — 30c each
Send $1.00 Postage for your
FREE 1983 JAMECO CATALOG
Prices Subject to Change

Call for Quantity Discounts

Mail Order Electronics - Worldwide

Jameco ELECTRONICS

1983 Jameco Calendar - Poster 16½" x 21½" - $3.95

1355 SHOREWAY ROAD, BELMONT, CA 94002

3/83 *PHONE ORDERS WELCOME — (415) 592-8097 Telex

ATARI

JOYSTICKS
JSA (2) . . . $6.95/pair

PADDLES
JSP (2) . . . $4.95/pair

TV GAME SWITCH
Switches TV to video game or computer operation. Used on Atari.
TGS-1 . . . $2.95 ea.

VIDEO GAME CHIPS



Pull-outs from hand-held video games. AP2000 consists of one MM2716Q EPROM and one 74LS04. AP2002 consists of two MM2716 EPROMs and one 74LS04. These EPROMs are mounted on a circuit board with a 12-pin edge card connection. EPROMs can be reprogrammed for other applications.

AP2000 . . . . . $2.49 ea. or 2 for $3.95
AP2002 . . . . . $3.49 ea. or 2 for $6.49

JOYSTICKS



JS-5K (Pictured)

JS-5K	5K Linear Taper Pots	$5.25
JS-100K	100K Linear Taper Pots	$4.95
JS-150K	150K Linear Taper Pots	$4.75
JVC-40	40K (2) Video Controller in Case	$4.95

JS KNOB — Knob for JS5K,100K,150K . . . . . $.99 ea.
JVC KNOB — Knob for JVC-40 . . . . . $.99 ea.

Jameco ELECTRONICS — Digital Thermometer Kit

Dual sensors — switch controls for indoor/outdoor or dual monitoring — can be extended to 500 feet. Continuous LED .8" ht. display. Range: -40°F to 199°F, -40°C to 100°C. Accuracy ±1° nominal. Calibrate for Fahrenheit/Celsius. Simulated walnut case. AC wall adapter included. Size: 6¾"L x 3¼"H x 1⅞"D.

JE300 . . . . . $39.95

BOOKS
NATIONAL SEMICONDUCTOR — INTERSIL — INTEL

30001 **National CMOS Data Book (1981)** $6.95
(640 pages) 74C, CD4000, and A/D Converters

30002 **National Interface Data Book (1980)** $6.95
(704 pages) DP, DS8000, DS3600, DS5700, etc.

30003 **National Linear Data Book (1982)** $11.95
(1376 pages) LM, LF, ADC, DAC, LH Series

30004 **National Series 80 — Board Level Computer(1980)** $4.95
(224 pages)

30005 **National TTL Logic Data Book (1981)** $9.95
(624 pages) 74COO,S,L,H,S, and DM8000 Series

30006 Above (3) 30001,3,5 as set . . $24.95

30008 **National Memory Data Book(1980)** $6.95
(464 pages) RAMs, ROMs, PROMs, EPROMs Series

30009 **Intersil Data Book (1983)** $9.95
(1356 pages) Complete line.

30010 **National Audio/Radio Handbook (1980)** $5.95
(240 pages) Pre-Amps, AM, FM & FM Stereo, Power Amps

30011 **National Linear Application Handbook(1980)** $15.95
(736 pages) Application Notes, Linear Briefs, etc.

30012 **National PAL Data Book (1982)** $5.95
(176 pages) Data Sheet, PAL Design

30013 **Zilog Data Book (1983)** $7.95
(641 pages) Microprocessors and Support Chips

010400 **Intel Component Data Book (1982)** $14.95
(1405 pg.) Full data sheets for Intel's products incl. mem. devices, microproc., periph. & ind./mil. products

205610 **Intel Peripheral Design Handbook(1981)** $9.95
(828 pages) Full data sheets, application notes for Intel peripheral device components

Universal Computer Keyboard Enclosures



"DTE" Blank Desk-Top Enclosures are designed for easy modification. High strength epoxy molded end pieces in mocha brown finish. Sliding rear/ bottom panel for service/component access. Top/bott. panels .080" thick alum. alodite type 1200 finish (gold tint color) for best paint adhesion after modification. Vented top & bottom panels for cooling efficiency. Rigid construction provides unlimited applications. Assembly instructions included.

DTE-8 Panel Width 7.5" $24.95
DTE-11 Panel Width 10.13" $27.95
DTE-14 Panel Width 13.5" $29.95
DTE-20 Panel Width 19.25" $34.95

Mostek DC/DC Converter +5 VOLTS TO -9 VOLTS

Input: +5V. Output: -9V (regulated) @ 30mA. Printed circuit mounting. Specifications incl.
DC10 . . . . . $2.95 ea. or 2/$4.95

Battery Checker

Easy-to-use hand-held battery checker tests AA, AAA, C, D, and 216 batteries. A multi-colored meter shows if battery is good, weak or needs replacing. Size: 6¼"L x 2¼"W x 1-7/8"H.

BC-1 . . . . . $6.95 ea.

KEYBOARDS — POWER SUPPLIES

17⅜"L x 6"W x 1⅝"H

DATANETICS 73-KEY KEYBOARD — *Apple Compatible*
Data Entry Keyboard uses MM5740 8EE/N encoder chip (included). 73-Key Keyboard features 11-key numeric keypad, SPST switching, 24-pin edge card connection. Includes pin-out.
Part No. KB261 (Fits DTE-20 Enclosure) . . . . . $49.95 each

16⅜"L x 5¼"W x 1⅝"H

MICRO SWITCH 69-KEY KEYBOARD
Data Entry Keyboard; Encoded Output; 8-bit Parallel EBC DIC. Switching: Hall Effect, 24-pin Edge Card Connection. Complete w/Pin Connection. Can easily be modified to ASCII code.
Part No. KB69SD12-2 (Fits into DTE-20 Enclosure) . . . . . $19.95 each

23"L x 5¼"W x 1-3/8"H

MICRO SWITCH 85-KEY KEYBOARD
Word Processing Keyboard, 26 Pin Edge Card Connection. Supply Voltage +5VDC. Main Keyboard is QWERTY. Additional Key Pads for Cursor and word processing functions.
Part No. 85SD18-1 . . . . . $29.95 each

18¼"L x 7¾"W x 1⅞"H

MICRO SWITCH 88-KEY KEYBOARD (PARALLEL
Data Entry Keyboard used in a Diablo 1640 Terminal. Supply Voltage: +5V, -12V. Switching: Hall Effect — 10-pin Edge Card Connection. Schematic Included. Uses 8048 Encoder Chip.
Part No. 88SD22 (Fits into DTE-20 Enclosure) . . . . . $49.95 each

11⅝"L x 3⅜"W x 1⅝"H

HI-TEK 58-KEY KEYBOARD
SPST switching, mechanical, monolithic housing, charcoal grey keycaps. Keyboard is not mounted on circuit board (each key is individually accessible). Used to replace touch-membrane found on Sinclair, Atari, and TRS-80 computers.
Part No. K-58 (Fits DTE-14 Enclosure) . . . . . $19.95 each

9⅜"L x 4⅜"W x 1⅝"H

ALPS 29-KEY CALCULATOR KEYBOARD
Features one 8-position decimal select switch, one 3-position switch, and two 2-position switches, mechanical SPST switching, 22-pin edge card connection. Pin-out included.
Part No. KB29704D (Fits DTE-11 Enclosure) . . . . . $4.95 each

POWER SUPPLY +5VDC @ 1 AMP REGULATED — *Transaction Tech*
Output +5VDC @ 1A (also +30VDC) reg. Input 115VAC 60Hz. 2-tone (black/beige) self-enclosed case. 6 ft., 3 cond. black power cord. 6½"W x 7"D x 2¾"H. Wt. 3 lbs. Data sheet incl.
Part No. PS51194 . . . . . $19.95 each

POWER SUPPLY +5VDC @ 3 AMP REGULATED — *Deltron*
Input: 115VAC, 47-440Hz. Output: 5VDC Adjustable @ 3 amp, 5VDC @ 2.5 amp. Adjustable current limit. Ripple & Noise: 1MV rms, 5MV p-p — 2 mounting surfaces. UL recognized. Size: 4"W x 4⅛"L x 2-7/16"H - wt. 2 lbs. Data sheet included.
Part No. DPS-1 . . . . . $29.95 each

POWER SUPPLY +5VDC @ 7.5 AMP, 12VDC @ 1.5 AMP SWITCHING
Input: 115VAC, 50-60Hz @ 3 amp/230VAC, 50Hz @ 1.6 amp. Fan volt./power supply select switches (115/230VAC). Output: 5VDC @ 7.5 amp, 12VDC @ 1.6 amp. 8 ft. blk. pow. cord. 11½"W x 12⅛"D x 3¾"H. Wt. 6 lbs.
Part No. PS94V0 . . . . . $49.95 each

POWER SUPPLY 4-Channel Switching Power Supply
Microprocessor, mini-computer, terminal, medical equipment and process control applications. Input: 90-130VAC 47-440Hz. Output: +5VDC @ 5A, -5VDC @ 1A; +12VDC @ 1A, -12VDC @ 1A. Line reg.: ±0.2%. Ripple: 30mV p-p. Load reg.: ±1%. Overcurrent protection. Adj: 5V main output ±10%. 6-3/8"L x 1-7/8"W x 4-15/16"H. Wt. 1½ lbs.
Part No. FCS-604A . . . . . $69.95 each

POWER SUPPLY Adjustable Switching 4-24VDC to 5 Amps
Adj. 4-24VDC; 5VDC @ 5A, 6VDC @ 4.8A, 9VDC @ 4.1A, 12VDC @ 3.3A, 18VDC @ 1.9A, 24VDC @ .5A. Overvoltage Protection. Input: 115VAC 50/60Hz. Output variations within 20mV. 8.25"L x 4.25"W x 2.25"H. Wt. 3.25 lbs.
JE224 Kit . . . . . $79.95 each
JE224A Assembled & Tested . . . . . $99.95 each

84-Key Keyboard
CA153A $69.95

CONTROL DATA
Data Entry Keyboards
RS232 Interface
FT2 Shielded Base
SPST Switching
Momentary Contact Keyswitches
30" Interface Cable
Attractive Case

104-Key Keyboard
CA148 . . . . . $99.95

95-Key Keyboard
CA154A $79.95

80-Key Keyboard
CA150C $89.95

Color; keycaps: black, blue, red - cover: black w/beige base. 21½"x9"x3½". 6lbs.

BUG BOX™ — 30 individual compartments • Stores 60 8-pin or 30 14- or 16-pin DIPs • Bug rugs not included • Clear plastic cover slides & locks • Cover marked w/numbers 1-30 • Compartment size: 1" x 3.75" x .5" deep • Box size: 4.9" x 3.3" x .6" • Weight: 1.75 oz.

BUG BOX™
Please specify color code: (B) Blue, (R) Red, (W) White, (Y) Yellow

Part No./Color Code		QTY	PRICE
BGX-001-( )		1	$ 2.29
BGX-010-( )		10	19.99
	ANTI-STATIC		
BGX-001-( )	AS	1	$ 3.29
BGX-010-( )	AS	10	28.89

BUG CAGE™ — 12 locations store Bug Boxes. Big Bug Boxes or Bug Trays • Modular and interlocking • Heavy duty injection molded plastic • Each cage has 6 slip-on locations • 2 cages per pkg. • Cage size: 5-1/8" x 5" x 3-7/8" • 4 colors available — please specify color code: (B) Blue, (R) Red, (W) White, (Y) Yellow

Part No./Color Code	Price
BGC-001-( ) 2 Cages(6loc. ea.)	$11.95/pkg.

BUG TRAY™ — Stores in Bug Cage • Molded plastic • Three styles: Open (1 compartment 3.05" x 4.6" x .6"); Vertical (5 compartments .5" x 4.6" x .6"); and Horizontal (8 compartments .4" x 3.95" x .6") • Ideal for tools, hardware, components, etc. • Tray size: 3.55" x 5.05" x .6" • Black color only

PART NO.	DESCRIPTION	PRICE
BTH-001	Horizontal Bug Tray	$1.95
BTV-001	Vertical Bug Tray	1.95
BTO-001	Open Bug Tray	1.95
BTX-003	1 of each Bug Tray (3)	4.98

BUG RUG™ — Static discharge protection for CMOS and MOSFET devices • Pre-cut to dimensions of BUG BOX (1" x .35")

Part No.	Description	Price
BRG-030	30 foam rectangles for Bug Box	$1.98
BBR-036	6 foam rec. for LSI Big Bug Box	1.98

CAGE KEEPER™ — Pins column of Bug Boxes in Bug Cage

	Price
CKP-005 5 inch	$4.98/pkg.
CKP-010 10 inch	6.98/pkg.

BUG BOX™ STORAGE SYSTEMS



BUG CAGE™ (BGC-001-____) with Bug Boxes

LSI BIG BUG BOX™ — Designed to store large IC's, Resistors, Capacitors and Diodes • Divided into three compartments measuring 1" x 4.15" x .5" deep • Three vertical and three horizontal dividers included • Bug Rugs not included • Box size: 4.9" x 3.3" x .6" • Weight 1.75 oz.

LSI BIG BUG BOX™
Please specify color code: (B) Blue, (R) Red, (W) White, (Y) Yellow

PART NO./COLOR CODE		QTY	PRICE
BLX-001-( )		1	$ 3.29
BLX-010-( )		10	28.79
	ANTI-STATIC		
BLX-001-( )	AS	1	$ 4.29
BLX-010-( )	AS	10	37.89

BACK PACK™ — Self-adhesive labels for the back of ICs • Shows exact internal logic in relation to IC pins • 532 labels in each package (including several blank labels) • Each package for 8, 14, 16, 24, 28 and 40-pin ICs • Combo package includes 1,068 labels for TTL and CMOS ICs • Microprocessor package contains 744 labels

Part No.	Description	Price
BPT-012	TTL	$7.95
BPC-012	CMOS	8.95
BPM-012	Combo	14.95
BPU-012	Microprocessor	9.95

BUG TAGS™ — Self-adhesive, easy-to-read labels for marking Bug Box and LSI Big Bug Box • Most popular components

PART NO.	DESCRIPTION	QTY.	PRICE
BTT-200	TTL	200	$4.98
BTC-200	CMOS	200	4.98
BTK-200	LS Schottky	200	4.98
BTS-200	Special	200	4.98
BTM-800	Mixer	800	13.95

MORE BUG TAGS AVAILABLE!

★ ★ ★ **BUG BOX SYSTEMS INTRODUCTORY SPECIAL** ★ ★ ★
Your choice: regular or anti-static. Includes 2-Bug Cages (12 locations); 6-Bug Boxes; 3-LSI Big Bug Boxes; 1-horizontal Bug Tray; 1-open Bug Tray; 1-vertical Bug Tray; 1 Package Bug Rug for regular Bug Boxes; 1 package Bug Rug for LSI Big Bug Boxes; 1 package Mixer Labels (800 each). Color: Bug Boxes and Cages - Blue, Bug Trays - Black.
SP-BUG — Regular (Retail value $59.45) . . . . . *Sale Price $49.95*
SP-BUG-AS — Anti-Static (Retail value $67.45) . . . . . *Sale Price $59.95*

$10.00 Minimum Order — U.S. Funds Only
California Residents Add 6½% Sales Tax
Shipping — Add 5% plus $1.50 Insurance
Send S.A.S.E. for Monthly Sales Flyer!

Spec Sheets — 30c each
Send $1.00 Postage for your *FREE 1983 JAMECO CATALOG*
Prices Subject to Change

Call for Quantity Discounts

Mail Order Electronics • Worldwide
Jameco ELECTRONICS

1983 Jameco Calendar Poster 16½" x 21½" *$3.95*

1355 SHOREWAY ROAD, BELMONT, CA 94002
3/83 *PHONE ORDERS WELCOME — (415) 592-8097 Telex: 176043*

EXPAND YOUR MEMORY

TRS-80 to 16K, 32K, or 48K

**Model 1 = From 4K to 16K Requires (1) One Kit
Model 3 = From 4K to 48K Requires (3) Three Kits
Color = From 4K to 16K Requires (1) One Kit

**Model 1 equipped with Expansion Board up to 48K Two Kits Required
— One Kit Required for each 16K of Expansion —

TRS-16K3 *200ns for Color & Model III $12.95
TRS-16K4 *250ns for Model I $10.95

TRS-80 Color 32K or 64K Conversion Kit

Kit comes complete with 8 each 4164-2 (200ns) 64K dynamic RAMs and conversion documentation. Converts TRS-80 color computers with D and E circuit boards, and all new color computers to 32K. Minor modifications of 32K memory will allow the use of all 64K of the dynamic RAM.

TRS-64K2 . . . . . $54.95

5¼" Mini-Floppy Disk Drive

Pertec Computer Corp.

FOR TRS-80 MODEL I (Industry Standard)
Features single or double density. Recording mode: FM single, MFM double density. Power: +12VDC (±0.6V) 1.6A max., +5VDC (±0.25V) 0.8A max. Unit (as pic. at left does not incl. case, power supply, cables). 30-pg. data book incl. Wt. 3½ lbs. Size: 5¾"W x 8"D x 3¼"H.

Part No.	Limited Quantity!	Price
FD200	Single-sided, 40 tracks, 250K bytes capacity	$179.95
FD250	Double-sided, 35 tracks, 438K bytes capacity	$199.95

Siemens 8" Floppy Disk Drive



- Shugart 801R compatible
- Single-Sided
- 77 Tracks
- 400/800K Bytes Capacity
- Industry Standard

The FDD100-8 8" Floppy Disk Drive (Industry Standard) features single or double density. Recording mode: FM single, MFM double density. Transfer rate: 250K bits/sec. single density; 500K bits/sec. double density. The FDD100-8 is designed to work with the single-sided soft sectored IBM Diskette I, or ed. disk cartridge. Hard-sectored option available. Power: 115/230VAC @ 50-60Hz, +24VDC @ 1.7 amps max., +5VDC @ 1.2 amps max. Unit as pictured above (does not include case, power supply, or cables). Size 8.55"W x 14"L x 4.5"H. Weighs 12 lbs. Incl. 96-pg. manual.

Part No.		Price
FDD100-8	Buy 1 for	$269.95 each
FDD100-8	Buy 2 for	$259.95 each
FDD100-8	*Buy 10 for*	*$249.95 each*

2708,2716,2732 & 2764 EPROM Programmer
JE664 EPROM PROGRAMMER
8K TO 64K EPROMS — 24 AND 28 PIN PACKAGES
Self-Contained — Requires No Additional Systems for Operation

NEW!

• Programs, validates, and checks for properly erased EPROMs • Emulates PROMs or EPROMs • RS232C Computer Interface for editing/program loading • Loads data into RAM by keyboard • Changes data in RAM by keyboard • Loads RAM from an EPROM • Compares EPROMs for content differences • Copies EPROMs • Power Input: 115VAC, 60Hz, +10W power consumption • Enclosure: Color-coordinated, light tan panels w/molded mocha brown end pieces • Size: 15.5/8"L x 8¾"D x 3⅛"H • Wt.: 5¼ lbs.

JE664-A EPROM Programmer $995.00
Assembled & Tested (Includes JM16A Module)

JE665 — RS232C INTERFACE OPTION — The JE665 RS232C Interface Option implements computer access to the JE664's RAM. Sample software written in BASIC provided for TRS-80® Model I, Level II Computer. Baud rate: 9600. Word Lgth: 8 bits - odd parity. Stop bits: 2. Option may be adapted to other computers.

JE664-ARS EPROM Prog. w/JE665 Option $1195.00
Assembled and Tested (Includes JM16A Module)

EPROM JUMPER MODULES — The JE664's JUMPER MODULE (Personality Module) is a plug-in Module that pre-sets JE664 for proper programming pulses to the EPROM & configures EPROM socket connections for that particular EPROM.

Part No.	EPROM	EPROM MANUFACTURER	PRICE
JM08A	2708	AMD, Motorola, National, Intel, TI	$14.95
JM16A	2716, TMS2516	Intel, Motorola, National, NEC, TI	$14.95
JM16B	TMS2716	Motorola, TI (+5...12, +12)	$14.95
JM32A	TMS2532	Motorola, TI	$14.95
JM32B	2732	AMD, Fujitsu, NEC, Hitachi, Intel	$14.95
JM64A	MCM68764, MCM68L764	Motorola	$14.95
JM64B	2764	Intel	$14.95
JM64C	TMS2564	TI	$14.95

UV-EPROM Eraser

8 Chips — 51 Minutes



1 Chip — 37 Minutes

Erases 2708, 2716, 2732, 2764, 2516, 2532, 2564. Erases up to 8 chips within 51 minutes (1 chip in 37 minutes). Maintains constant exposure distance of one inch. Special conductive foam liner eliminates static build-up. Built-in safety lock to prevent UV exposure. Compact — only 9.00" x 3.70" x 2.60". Complete with holding tray for 8 chips.

UVS-11EL Replacement Bulb $16.95
DE-4 UV-EPROM Eraser $79.95

Sprite-style Fan

- 36cfm free air delivery
- 3.125" sq. x 1.665" depth
- 10 yrs. cont. duty at 20°C
- 115V 50/60Hz

*Metal Frame

PWS2107U Cleaned & tested (used) . . . . $ 9.95 ea.
*PWS2107F New . . . . . $14.95 ea.

Muffin-style Fan

- 105cfm free air delivery
- 4.68" sq. x 1.50" depth.
- 10 yrs. cont. duty at 20°C
- Impedance protected, ambients to 70°C
- 115V 50/60Hz 14W Wt. 17 oz.

*Metal Frame

MU2A1-U Cleaned & tested (used) . . . . . $9.95 ea.
*MU2A-1N New . . . . . $14.95 ea.

Circle 231 on inquiry card.

www.americanradiohistory.com

PRIORITY ONE ELECTRONICS

THERE ARE NO BETTER BOARDS — THERE ARE NO BETTER PRICES!

CompuPro SYSTEMS FROM PRIORITY ONE ELECTRONICS

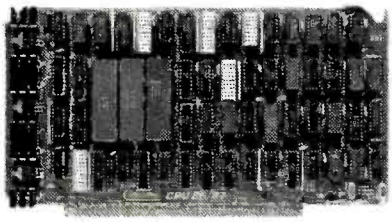

CPU BOARDS

CO-PROCESSOR 8086/8087

16 bit 8 or 10 MHz 8086 CPU with sockets for 8087 and 80130

Part No.	Description	List Price	Our Price
86GBT186A	A&T 8MHz 8086 only	$695.00	$624.89
86GBT186C	CSC 10MHz 8086 only	$850.00	$764.89
86GBT186A87	A&T with 8087 option	$995.00	$925.00
86GBT186C87	CSC with 8087 option*	$1150.00	$1065.00

*8087 Limits clock speed to 5MHz

(816) DUAL PROCESSOR 8085-8088

6 or 8 MHz provides true 16 Bit Power with a standard 8 bit S-100 bus

86GBT1812A	A&T 6MHz	$425.00	$398.89
86GBT1812C	CSC 6/8 MHz	$525.00	$497.89

68K - 68000 16 BIT CPU

16 bit 8 or 10 MHz on-board sockets for 2716, 2732, or 2764 EPROMs for up to 8K x 16 of memory

86GBT184A	A&T 8MHz	$695.00	$625.00
86GBT184C	CSC 10MHz	$850.00	$765.00

FORTH OPERATING SYSTEM FOR 68K CPU

Requires a DISK 1, 64K of CompuPro memory, and an INTERFACER 3 or 4.

86GBT68K0S	FORTH operating system	$200.00

CPUZ - Z80D CPU NOW 6MHz!

3/6 MHz Z80B CPU with 24 Bit Addressing. FASTEST Z80 CPU AVAILABLE!

86GBT180A	3/6 MHz A&T	$295.00	$279.89
86GBT180C	3/6 MHz CSC	$395.00	$374.89

*When 2 or more 8" disk drives are purchased with Disk 1 Controller.

DISK CONTROLLERS

DISK 1 FLOPPY CONTROLLER - OUR BEST!

Fast DMA, Soft Sector, Controls Up to Four 8" or 5¼" Single or Double Density Drives.

86PDB171ACPM	A&T w/CPM 2.2 & BIOS	$670.00	$495.00
	*When purchased with two 8" disk drives only.		$450.00
86PDB171CCPM	CSC w/CP/M 2.2 & BIOS	$770.00	$595.00
86GBT171A	Disk 1 Controller A&T	$495.00	$449.89
86GBT171C	Disk 1 Controller CSC	$595.00	$550.00
86GBTCPM80	CP/M 2.2 for Z80/8085 w/manual & BIOS 8" S/D disk		$174.89
86GBTCPM88	CP/M 2.2 for 8086 w/manuals & BIOS 8" S/D disk.		$299.89

DISK 2/SELECTOR CHANNEL HARD DISK CONTROLLER

Fast DMA 2 board set. controls 4 Shugart 4000 series or Fujitsu 2300 type drives. Includes CP/M 2.2'

86GBT177A	Assembled & Tested	$795.00	$750.00
86GBT177C	CSC	$895.00	$850.00

CMOS RAM SALE!

RAM 17 - 64K CMOS STATIC RAM

12 MHz, RAM 17, 2 Watt. DMA Compatible 24 Bit Addressing

Part No.	Description	List Price	Our Price
86GBTRAM17	64K A&T 10MHz		$319.00
86GBT175A64	64K A&T 12MHz	$499.00	$460.00
86GBT175C64	64K CSC 12MHz	$599.00	$550.00

RAM 16 - 32K x 16 BIT CMOS STATIC RAM

8 and/or 16 Bit

(816) 12 MHz, RAM 16, 32K x 16 or 64K x 8 IEEE/696 16 Bit 2 Watt, 24 Bit Addressing

86GBTRAM16	64K A&T 10MHz		$349.00
86GBT160A	64K A&T 12MHz	$550.00	$510.00
86GBT160C	64K CSC 12MHz	$650.00	$610.00

NEW! RAM 21 - 128K STATIC RAM

816 RAM 21 12MHz, 128K x 8 or 64K x 16 IEEE/696 8 or 16 Bit, 1 2 Amps, 24 Bit Addressing

86GBT190A	128K A&T	(816)	$1095.00	$ 995.00
86GBT190C	128K CSC	(816)	$1245.00	$1125.00

M-DRIVE SOLID STATE DISK DRIVE. 3500% FASTER!!

Not really, but the next best thing for CompuPro 8085/88 Users. Call for Details on M-Drive. M-Drive requires a 6MHz CPU 8085/88 dual processor. Disk 1 DMA disk controller and System Support 1 Multifunction Board.

86GBTM0128KA	128K of A&T memory & M-Drive Software	$1198.00
86GBTM0128KC	128K of CSC memory & M-Drive Software	$1398.00
86GBTM0256KA	256K of A&T memory & M-Drive Software	$2395.00
86GBTM0256KC	256K of CSC memory & M-Drive Software	$2795.00

M-DRIVE/H HARDWARE LOGICAL DISK SYSTEM

Interfaces through two I/O ports, and runs at 10MHz. IEEE 696 compatible. Requires any CompuPro CPU and a Disk 1. Each board contains 512K of fast, low power (900mA) RAM, with parity checking.

86GBT197A	M-DRIVE/H w/software, A&T	$1895.00	$1775.00
86GBT197C	M-DRIVE/H w/software, CSC	$2095.00	$1950.00

S-100 MAINFRAME

110V 60Hz CVT Mainframe uses famous 20 slot CompuPro Motherboard (55 lbs.)

86GBTENC20RM	20 Slot Rackmount	$895.00	$825.00
86GBTENC200K	20 Slot Desk Top	$825.00	$760.00

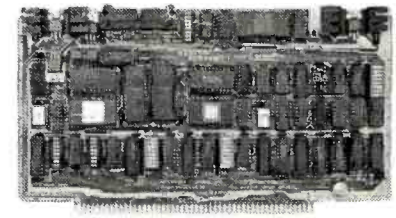

I/O BOARDS

SYSTEM SUPPORT 1 MULTIFUNCTION BOARD

Serial port (software prog. baud), 4K EPROM or RAM provision, 15 levels of interrupt, real time clock, optional math processor

Part No.	Description	List Price	Our Price
86GBT162A	Assembled & Tested	$395.00	$359.89
86GBT162C	CSC	$495.00	$459.89
86GBT8231	Math Chip		$195.00
86GBT8232	Math Chip		$195.00
86GBT162AM1	A&T w/8231 Math Chip		$490.00
86GBT162CM1	CSC w/8231 Math Chip		$654.89
86GBT162AM2	A&T w/8232 Math Chip		$490.00
86GBT162CM2	CSC w/8232 Math Chip		$654.89

MPX CHANNEL BOARDS

I/O Multiplexer, using 8085A-2 CPU on board w/4K RAM

86GBT166A4	Assembled & Tested	$495.00	$444.89
86GBT166C4	CSC	$595.00	$534.89
	With 16K RAM		
86GBT166A16	Assembled & Tested	$649.00	$584.89
86GBT166C16	CSC	$749.00	$674.89

INTERFACER 1

Two Serial I/O

86GBT133A	Assembled & Tested	$249.00	$218.89
86GBT133C	CSC	$324.00	$289.89

INTERFACER 2

Three parallel, one serial I/O board

86GBT150A	Assembled & Tested	$249.00	$218.89
86GBT150C	CSC	$324.00	$289.00

INTERFACER 3

Eight-channel multi-user serial I/O board

86GBT1748A	Assembled & Tested	$699.00	$628.89
86GBT1748C	CSC 200 hr. 8 port	$849.00	$748.89
86GBT1745A	Assembled & Tested	$599.00	$558.89
86GBT1745C	CSC 200 hr. 5 port	$699.00	$628.89

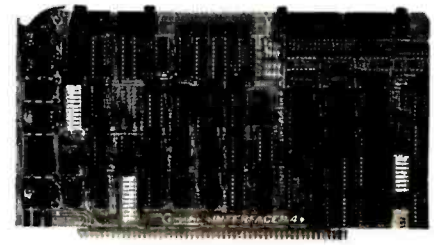

INTERFACER 4

Three Serial, 1 Parallel, 1 Centronics Parallel

86GBT187A	Assembled & Tested	$395.00	$314.89
86GBT187C	CSC	$495.00	$414.89

SPECTRUM COLOR GRAPHICS

Color Graphics board with Parallel I/O

86GBT144A	Assembled & Tested	$299.00	$285.00
86GBT144C	CSC	$395.00	$375.00

S-100 MOTHERBOARDS

Active termination, 6-12-20 Slot

86GBT153A	A&T 6 slot, 2 lbs.	$140.00	$125.00
86GBT153C	CSC 6 slot, 2 lbs.	$190.00	$155.00
86GBT154A	A&T 12 slot, 3 lbs.	$175.00	$155.00
86GBT154C	CSC 12 slot, 3 lbs.	$240.00	$220.00
86GBT155A	A&T 20 slot, 4 lbs.	$265.00	$235.00
86GBT155C	CSC 20 slot, 4 lbs.	$340.00	$310.00

Circle 354 on Inquiry card.

www.americanradiohistory.com

CompuPro 10 MHz 64KBytes S-100 STATIC RAM - ULTRA LOW POWER - ONLY 2 WATTS ASSEMBLED & TESTED - ONE YEAR WARRANTY $299*

UNBELIEVABLE! While the rest of the industry struggles to attain 6MHz, CompuPro has effortlessly jumped from 10 to 12MHz. The power consumption (400mA; 2 Watts) is still the lowest in spite of running nearly twice as fast. Priority One Electronics has purchased the remainder of CompuPro's 10MHz boards and are offering them at these unprecedented prices.

RAM 17

- Extremely low power consumption (2 watts typical)
- Flawlessly handles any DMA device per IEEE 696 specifications
- Single +5 Volt operation (requires no other supply voltages)
- Switch-Selectable choice of 24 address lines conforming to IEEE 696/S-100 extended addressing
- 2K windows, individually selectable at E000, E800, F000, and F800 permits use with older memory-mapped disk controllers or ROM (i.e., Morrow, NorthStar)
- Any 16K block may be disabled; dip switch selectable 2K disable from XXE000 - FFFF in 2K increments
- Switch Selectable PHANTOM disable



SALE PRICE: **$319.00 ea.**
List Price: $599.00
*2 or More: **$299.00 ea.**
BOGBTRAM17 Assembled & Tested

- Board addressable as one 64K x 8 or 32K x 16 block; DIP switch selectable on any 64K boundary
- Extremely low power consumption (2 watts typical)
- Meets or exceeds all IEEE 696/S-100 specifications
- Flawlessly handles any DMA device per IEEE 696 specifications
- Single +5 Volt operation (requires no other supply voltages)
- 24 bit addressing; conforms to IEEE 696 specifications
- 8 or 16 bit data transfer dependant on SXTRQ. Conforms with IEEE696 timing requirements for XTRQ and SIXTN

816 RAM 16

SALE PRICE: **$349.00 ea.**
List Price: $650.00
2 or More: **$325.00 ea.**
BOGBTRAM16 Assembled & Tested

CompuPro SYSTEM 816 FOR THOSE WHO DEMAND EXCELLENCE

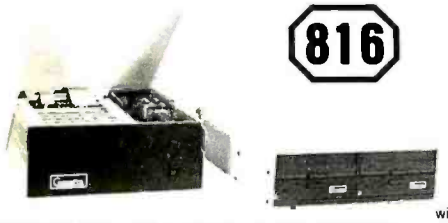

The **CompuPro** family of system packages excel in high level business, industrial, and scientific computing environments.

Each package includes a unique combination of **CompuPro** system components, optimized for common single and multi-user applications. All systems run 8 and 16 bit software, and all single-user systems may be easily upgraded to multi-user operation. The result is a computer which can grow as your computing requirements grow.

SYSTEM 816 BASIC COMPONENTS

HARDWARE:
- Desktop enclosure with 20 slot motherboard
- Dual QUME DT8 floppy drives in a cabinet with power supply
- Dual CPU 8085/8088
- Memory is comprised of multiples of RAM 17 64K static memory boards
- High speed Disk 1 DMA floppy disk controller board
- System Support One board: Clock/calendar, RAM/ROM/Math processor options, RS-232 serial port, dual interrupt controllers, 3 interval timers
- All internal cables

SOFTWARE:
- CP/M 2.2™ and CP/M 86™ operating systems
- CompuPro M-DRIVE™ for solid state disk drive
- SuperCalc-86™ spreadsheet program by Sorcim
- dBase II™ data base software by Ashton Tate

SYSTEM 816/A™

System 816/A gives superb computing today with an option for future expansion - all the way up to sophisticated multi-user operation.

SYSTEM 816/A BASIC SPECIFICATIONS

8 bit processor: 6MHz 8085 16 bit processor: 8MHz 8088
Disk storage: Up to 2.4 Megabytes. Single or double sided, single or double density, expandable to 4.8 Megabytes.
Main memory: 128K - expandable to: 1 Megabyte
Serial ports: 4 Parallel ports: 1
Centronics/Epson ports: 1
Software: CP/M 2.2, CP/M-86, M-Drive, SuperCalc-86, dBase.
Convenience features: Clock/calendar, interrupt controllers, interval timers, and math processor option.
Save over $1000.00 compared to all components purchased separately.

BOGBTSYSB1BADA	Single user system desk top, A&T	**$5495.00**
BOGBTSYSB16ADC	Single user system desk top, CSC	**$6045.00**

(All Systems shipped Freight Collect)

SYSTEM 816/B™

System 816/B delivers state-of-the-art single user computing today, with an option for future expansion to multi-user operation.

SYSTEM 816/B Basic Specifications:

8 bit processor: 6MHz 8085 - 16 bit processor: 8MHz 8088
Disk storage: Up to 2.4 Megabytes. Single or double sided, single or double density, expandable to 4.8 Megabytes.
Main memory: 256 K - expandable to: 1 Megabyte
Serial ports: 6
Software: CP/M 2.2, CP/M-86, M-Drive, SuperCalc-86, dBase II
Convenience features: Clock/calendar, interrupt controllers, interval timers, and math processor option.
Save over $1800.00 compared to all components purchased separately.

BOGBTSYSB16BOA	Single user system desk top, A&T	**$6995.00**
BOGBTSYSB16BOC	Single user system desk top, CSC	**$7795.00**

SYSTEM 816/C

System 816/C is the system of choice for firms which need superior computing power now, with the option to expand into an even more powerful system in the future. **System 816/C** supports up to three users simply by adding appropriate terminals: for more users, just add more **CompuPro** RAM and terminals.

SYSTEM 816/C BASIC SPECIFICATIONS

8 bit processor: 6MHz 8085 - 16 bit processor: 8MHz 8088
Disk storage: Up to 2.4 Megabytes. Single or double sided, single or double density, expandable to 4.8 Megabytes.
Main memory: 384K - expandable to: 1 Megabyte
Serial ports: 9
Software: CP/M 2.2, CP/M-86, MP/M 8-16, M-Drive, SuperCalc-86, dBase II
Convenience features: Clock/calendar, interrupt controllers, interval timers, and math processor option.
Save over $2300.00 compared to all components purchased separately.

BOGBTSYSB16CDA	Multi-user system desk top, A&T	**$8995.00**
BOGBTSYSB16COC	Multi-user system desk top, CSC	**$9995.00**

MINICOMPUTER REGULATORS

The Power Protectors SOLA

HOW CLEAN IS YOUR POWER?

GS SOLA ELECTRIC

The Sola Micro/Mini Computer Ultra Isolated Regulator provides instantaneous voltage regulation, and ultra isolation from both transverse and common mode noise for any type of load. It also suppresses transients, protects against overloads and serves as a portable dedicated line. It is the ultimate in AC line conditioning equipment.

PORTABLE 120VAC 60 Hz SINGLE PHASE

Part No.	Maximum Output VA Rating	Dimensions L x W x D (Approx.)	Approx. Shipping Weight	List	SALE
BOSLAB313070	70	12 x 6 x 6	10 lbs.	$196.20	$159.00
BOSLAB313114	140	12 x 6 x 6	18	$257.15	$208.40
BOSLAB313125	250	14 x 8 x 8	31	$305.55	$248.05
BOSLAB313150	500	17 x 9 x 9	47	$424.40	$344.00
BOSLAB313175	750	17 x 9 x 9	60†	$541.40	$438.80
BOSLAB313210	1000	17 x 9 x 9	75†	$627.10	$508.25
BOSLAB313220	2000*	17 x 11 x 11	108†	$1066.40	$864.35

Output voltage is 120VAC ±3% for an input voltage of 95-130VAC
*Unit has 30 Amp twist receptacle.
Also available are Hard Wired and 50Hz models
† Shipped Freight Collect

DIRECT CONNECT MODEM

$79.00

0 - 300 BAUD MURA MM-100

NEW!

- 0 - 300 baud
- RS232C interface
- Full duplex
- Carrier detect indicator
- Bell 103 compatible
- Low voltage
- Originate/Answer switch selectable

		List Price	SALE
BOMURMM100	0 - 300 baud modem *(Shipping Weight: 2 lbs.)*	$99.95	**$79.00**
BOCNORS232BF	RS232 cable		**$19.95**

Cables also available for Atari, TI, Vic 20, & Timex

MasterCard VISA **PRIORITY ONE ELECTRONICS**
9161 DEERING AVE. CHATSWORTH, CA 91311
MEMBER MIA NEDA

ORDER TOLL FREE (800) 423-5922 - CA, AK, HI CALL (213) 709-5111

Terms: U.S. VISA, MC, BAC, Check, Money Order, U.S. Funds Only. CA resident sadd 6½% Sales Tax. MINIMUM PREPAID ORDER $15.00. Include MINIMUM SHIPPING & HANDLING of $3.00 for the first 3 lbs. plus 40¢ for each additional pound. Order over 50 lbs. sent freight collect. Just in case, please include your phone number. Prices subject to change without notice. We will do our best to maintain prices through March, 1983. Credit Card orders will be charged appropriate freight. If you haven't received your Winter '83 Engineering Selection guide, send $1.00 for your copy today! Sale prices for prepaid orders only.

RETAIL STORE PHONE NUMBERS: (Chatsworth:) (213) 709-5464 - (Irvine:) (714) 660-1411

Circle 354 on Inquiry card.

www.americanradiohistory.com

PRIORITY ONE ELECTRONICS

SIEMENS FDD100-8
8" FLOPPY DISK DRIVE
SINGLE SIDED, DOUBLE DENSITY
SHUGART 801R COMPATIBLE

90 DAY WARRANTY!

ONCE AGAIN YOU RECEIVE THE BENEFIT OF OUR UNEQUALLED PURCHASING POWER!



Ea. $249.00
2-9 $239.00
10+ $209.00

OEM INQUIRIES INVITED
(Include $7.00 per drive for UPS ground)
BOSIEFDD1008

ORDER NOW AND SAVE!

S-100 DUAL 8" SUBSYSTEM

BOCCS2422A	S-100 Disk Controller with CP/M 2.2	1	$399.00
BOSIEFDD1008	Siemens Double Density 8" drive	2	$478.00
BOIIIFOE002	Dual Horizontal Cabinet with Power Supply and Data Cable	1	$295.00
		1	$ 35.00
			$1207.00



SAVE $212.00!!

$995.00
(Include $30.00 for shipping)

DON'T MISS OUT!
Order No.
BOPDBSIESUB1

BUY DRIVE AND CABINET TOGETHER AND $AVE!

International Instrumentation Incorporated

- Positive Pressure Filter Cooling
- Power Supply:4A@+5V,3A@+24V 1A@-5V
- Each output is individually fused
- Hinged top for easy access
- Heavy non-flex .090 aluminum base
- Modular power connectors

DUAL 8" SIEMENS FOO1008, DUAL 8" CABINET POWER SUPPLY AND INTERNAL POWER CABLES

IF BOUGHT SEPARATELY: $890.00

PRICED AT: **$695.00**
BOPOBIIISIE

ENVIRONMENT MONITOR PANEL
Temperature and voltage monitor with visual and audible alarm for overtemp condition. Direct Digital Readout of Internal temperature in C° on standard DVM

BOIIIFOE002	CABINET ONLY (Sh. Wt. 38 lbs.)	$295.00
BOPOBIIISIEEM	2-Drives, Cabinet & disk environment monitor	$775.00
BOIIIFOE002EM	Cabinet only with disk environment monitor	$375.00
BOPOB50MI8E18E	Dual Data Cable	$ 31.15
BOPGC50S60S	External Data Cable	$ 19.77

64K IEEE/S-100 DYNAMIC RAM

California Computer Systems

2 or 4MHz BANK SELECTABLE

• 2 or 4 MHz operation • Designed to IEEE proposed S-100 bus standard • Supports IMSAI-type front panels • Operates with either an 8080 or Z-80 based S-100 system providing processor transparent refreshes with both • Bank-select system allows system memory expansion • Bank-select port's address is jumper selectable • Any 16K block can be made bank-independent • All 64K can be made bank-enabled on power-on and reset • Fully buffered address and data lines • Configuraiton as a 16K, 32K or 48K board without the removal of RAMs • Fail-safe refresh circuitry for extended Wait States • Board configuration with reliable, easy to configure Berg jumpers • Supports DMA • Jumper-selectable Phantom input • Assembled & Tested • All ICs in sockets • Uses Popular 4116 RAMs • Full factory warranty.

REGULAR LIST PRICE IS $375.00

YOU SAVE AN INCREDIBLE $176.00!!

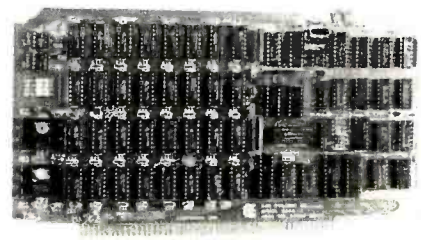

$199.00
BOCCS20653 *(Sh. Wt. 2 lbs.)*

MPI

NEW LOW PRICES!

5¼" DISK DRIVES

BOMPI51*	Single-Sided Double-Density 48 TPI	$200.00
BOMPI52*	Double-Sided Double-Density 48 TPI	$270.00
BOMPI91*	Single-Sided Double-Density 96 TPI	$275.00
BOMPI92*	Double-Sided Double-Density 96 TPI	$400.00

Replace "" when ordering, with "m" for MPI style bezel, or "S" for Shugart style bezel. (Shipping Weight 5 lbs.)

2" HIGH 8" DISK DRIVES

The first 2" high 8" disk drive allows for mounting under the keyboard on CRT, etc.
NO AC Required +5V +24VDC only
FAST 3 msec track to track!

BOMPI41M	½ High 1 side double-density	$380.00
BOMPI42M	½ High 2 side double-density	$460.00
BOMPI41S	Full height 1 side single drive, dble.-density	$380.00
BOMPI42S	Full height 2 sided single drive, dble.-density	$480.00
BOMPI410	Full height 1 side dual drive, dble.-density	$780.00
BOMPI420	Full height 2 side dual drive, dble.-density	$920.00

(Shipping Weight: 11 lbs. per drive)

Tandon



8-INCH THIN LINE

Exactly one-half the height of any other model
Proprietary, high-resolution, read-write heads patented by Tandon
D.C. only operation - no A.C. required
Industry standard interface
Three millisecond track-to-track access time (9 lbs.)

BOTNOTM8481 Single Sided: $380.00 2 or more: $370.00 ea.
BOTNOTM8482 Double Sided: $495.00 2 or more: $485.00 ea.

TANDON 5¼" DRIVES

BOTNOTMI001 Single Sided, 250KB (5 lbs.) $220.00 ea.
2 or More: $200.00 each

BOTNOTMI002 Double Sided, 500KB $295.00 ea.
2 or More: $270.00 each

BOTNOTMI003 Single Sided, 500KB $295.00 ea.
2 or More: $270.00 each

BOTNOTM1004 Double Sided, 1000KB $395.00 ea.
2 or More: $375.00 each

DUAL 8" HALF HEIGHT FLOPPY CABINET

- 24V @ 4A 5V @ 3A -5V@ 800ma
- Fan cooled
- Socketed power connections
- All supplies regulated

INTERNATIONAL INSTRUMENTATION, INC.

Ust Price SALE

BOIIIOTL002 Dual Thin Line Cabinet (12 lbs.) $225.00 **$165.00**

BUY THE CABINET & DRIVES AND $AVE!

With 2 Tandon Thinlines

BOPOBIIITNOI Cabinet w/2 TNDTM8481 -1 sided (30 lbs.)$885.00
BOPOBIIITNO2 Cabinet w/2 TNDTM8482 -2 sided (30 lbs.) $1115.00

With 2 MPI Slimlines

BOPOBIIIMPII Cabinet w/2 MPI41M - 1 sided (30 lbs.) $920.00
BOPOBIIIMPI2 Cabinet w/2 MPI42M - 2 sided (30 lbs.) $1080.00

Options

BOIIIOTLMPIKIT MPI drive adaptor mounting kit (2 lbs.) $24.95
BOIIIOCCSHU Shugart / AC/DC power connector kit (2 lbs.) $14.95
(For full size single SA801 or compatible drives)

Circle 355 on Inquiry card.

www.americanradiohistory.com

PRIORITY ONE ELECTRONICS

LOWEST COST PRINTERS AVAILABLE

$299.00



COEX 80 F/T

- 80 cps • 10, 12 or 16.5 cpi • 3 selectable line spacing • Vertical format control • Centronics parallel or RS232 serial interface • Uses a standard Underwood spooled ribbon • Friction and tractor feed

		List Price	Our Price
BOCOX80FT	Parallel Int.	$399.00	$329.00
BOCOX80FTSER	Serial Int.	$399.00	$329.00

(Shipping Weight: 21 lbs.)

$229.00

THIS IS NOT A TYPOGRAHICAL ERROR!!



- 5 x 7 Dot Matrix • Parallel Interface (Centronics) • Tractor Feed • Dot Addressable Graphics • Up to 3-Part Paper • Self Test • One Year Warranty • 30 CPS 80 Column Unidirectional • Uses Regular Paper

BOAXMGP100A (Shipping Weight 11 lbs.)

List Price: $389.00 **$229.00**

1200 BAUD AUTO-DIAL

HAYES SMARTMODEM COMPATIBLE

U.S. ROBOTICS

2 YEAR WARRANTY!!

MODEMS $495.00

The **AUTO DIAL 212A** Modem is a direct connect 0-300 or 1200 baud modem capable of dialing and calling for you. **The AUTO DIAL 212A is compatible in function to the DC Hayes SMARTMODEM™.**

Part No.	Description	List	SALE Price
BOUSRAOIAL212A	0-300 1200 baud dialing modem	$599.00	$495.00

EIA/RS232 WALL PLATES

(Does not include connectors)



BOIIIWPDB251 Single punched

4/$10.00

BOIIIWPDB252 Dual Punched

4/$12.00

HITACHI

Hitachi Denshi America, Ltd.

DUAL TRACE OSCILLOSCOPES

ALL HITACHI DUAL TRACE SCOPES ARE SHIPPED COMPLETE WITH 2 PROBES AND INSTRUCTION MANUAL

V-353F 35 MHz DELAYED SWEEP

- Single time base delay sweep • rectangular CRT with internal graticule • High sensitivity 1mv/div (7MHz) • Large dynamic range of 8 div to full bandwidth • CH1 output • Built-in signal delay line

BOHITV353F List: $949.00

SALE: $799.00

V-352F 35 MHz DUAL TRACE

Same as V353F except without delayed sweep.

BOHITV352F List: $895.00 **SALE: $749.00**

V-203F 20 MHz DELAYED SWEEP

- Single time base delay sweep • High sensitivity 1mv/div (5MHz) • Full TV triggering • X-Y operation • CH1 Output • High reliability, MTBF 20,000 hours

BOHITV203F List: $749.00

SALE: $625.00

V-202F 20 MHz DUAL TRACE

Same as V203F except without delayed sweep.

BOHITV202F List: $695.00 **SALE: $575.00**

V-302F 30 MHz

- High sensitivity 1mv/div (5 MHz) • Full TV Triggering • X-Y operation • CH 1 Output • Built-in signal delay line • High reliability, MTBF 20,000 hours

BOHITV302F List: $799.00

SALE: $699.00

V-152F 15 MHz DUAL TRACE

Same as V302F except without delay line and only 15MHz.

BOHITV152F List: $595.00 **SALE: $495.00**

DATAGARD™ SGL WABER

LINE MONITOR POWER CONDITIONERS

Before you plug in your computer, you'd better consider how you are going to insure or protect your investment from unwanted electrical pollution.

DG115 SERIES
SINGLE STAGE SPIKE PROTECTION

Part No.	Description	Wt.	List	SALE
BOWBRDG115P	Wall unit plug in	2 lbs.	$49.95	$34.95
BOWBRDG115S	6 outlet strip w/SW&LT	3 lbs.	$61.95	$42.00

DG315 SERIES
3 STAGE SPIKE FILTER & FOUR STAGE NOISE FILTER

BOWBRDG315P	5 Wall unit plg in	2 lbs.	$153.95	$ 99.95
BOWBRDG315S	6 outlet strip w/SW&LT	3 lbs.	$193.95	$119.95
BOWBRDG315R	6 outlet rack s w/SW&LT	8 lbs.	$193.00	$119.95

RS-232 "D" SUB-MINIATURE CONNECTORS

		1-9	10-24	25-99	100-UP
BOCNDDB25P	25 Pin Male	$2.75	$2.50	$2.25	$1.95
BOCNDDB25S	25 Pin Female	$4.00	$3.50	$3.25	$3.00
BOCNDDBS1212	1 Pc. Grey Hood	$1.85	$1.40	$1.25	$1.15
BOCNDP25H	2 Pc. Grey Hood	$1.50	$1.25	$1.10	$1.00
BOCNDDBS1228	2 Pc. Black Hood	$1.75	$1.50	$1.35	$1.20
BOCNDD20418	Hardware set 2/Pr.	$1.00	$ .80	$ .70	$ .80

5" DISKETTES

SOFT SECTOR
40 TRACK SINGLE SIDED
DOUBLE DENSITY WITH
HUB REINFORCING RINGS

Package of 10: **$19.95**

BONUS!!

FREE!! KASSETTE 10 LIBRARY CASE WITH PACKAGE OF 10 DISKETTES
A $4.25 VALUE!! BOPR5300 *(Shipping Weight 2 lbs.)*

BOPR1580 *package of 80, less Library Case* **$120.00**

TEXAS INSTRUMENTS

16 PIN GOLD AND TIN DIP SOLDERTAIL SOCKETS

QTY	TIN BOTIS16LP	GOLD BOTIG16LP
50	$ 8.00	$ 10.00
1000	$ 60.00	$ 80.00
4500	$225.00	$315.00

HITACHI

Color Display Monitors

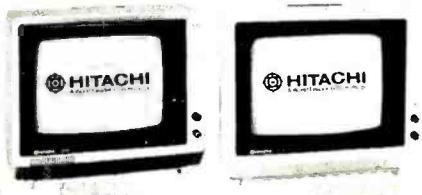

- 13" Screen
- NTSC or RGB Inputs
- High Impact Plastic Cabinet (Silver Grey)

		List Price	SALE
BOHITCM1481	Comp. video 1vp-p (28 lbs.)	$479.95	$339.00
BOHITCM1472	RGB 16 colors.(35 lbs.)	$1029.95	$749.00

SEND $1.00 TODAY FOR THE NEW, FULL COLOR WINTER 1983 ENGINEERING SELECTION GUIDE!!

PRIORITY ONE ELECTRONICS

MasterCard VISA

9161 DEERING AVE. CHATSWORTH, CA 91311 (11

NEDA MTA

ORDER TOLL FREE (800) 423-5922 - CA, AK, HI CALL (213) 709-5111

Terms: U.S. VISA, MC, BAC, Check, Money Order, U.S. Funds Only. CA residents add 6½% Sales Tax. MINIMUM PREPAID ORDER $15.00. Include MINIMUM SHIPPING & HANDLING of $3.00 for the first 3 lbs. plus 40¢ for each additional pound. Orders over 50 lbs. sent freight collect. Just in case, please include your phone number. Prices subject to change without notice. We will do our best to maintain prices through March, 1983. Credit Card orders will be charged appropriate freight. If you haven't received your Winter '83 Engineering Selection guide, send $1.00 for your copy today! Sale prices for prepaid orders only.

RETAIL STORE PHONE NUMBERS: (Chatsworth:) (213) 709-5464 - (Irvine:) (714) 660-1411

Circle 355 on Inquiry card.

www.americanradiohistory.com

PRIORITY ONE ELECTRONICS

WE ARE OPEN IN IRVINE, CA!

That's Right! Priority One Electronics proudly announces the February 1983 Opening of its 10,000 square-foot SYSTEM CENTER/RETAIL SHOWROOM in the heart of Orange County, California!

18241 McDurmott Irvine, CA 92714

(714) 660-1411

SIGN UP NOW FOR GRAND OPENING SALE FLYER!

$10.00 $10.00

GET ACQUAINTED COUPON!

Good On Any Prepaid Purchase Over $25.00, At Our Irvine Systems Center Only! Limit One Per Person.

$10.00 Expires March 31, 1983 $10.00

BOOCDISC

DUAL QUME 8" FLOPPY DRIVE, CABINET, DMA S-100 CONTROLLER, AND CP/M® FROM CompuPro

$1595.00

BOPOBGBT206SYS

YOU SAVE $1419.77!!

- 2 Double sided 8" QUME DT8 disk drives
- DMA Floppy Controller (controls up to 4 drives)
- CP/M® 2.2 w/bios written for the Disk 1 Controller
- Cabinet includes power supply & internal data cable
- External data cable included

(Shipping Charge: $21.80; shipped in two boxes)

			List Price
1	GBT206SP		$2325.00
1	GBT171A		$495.00
1	GBTCPM80		$175.00
1	PGC50S60S		$ 19.77
			$3014.77

ABSOLUTELY THE MOST COST EFFECTIVE DISK SUBSYSTEM EVER OFFERED BY PRIORITY ONE ELECTRONICS!!

CABINET AND 2 QUME DT8 DOUBLE SIDED DRIVES PROVIDE 2.4 MBYTES OF MASS STORAGE!!

$1295.00 (Sh. Wt. 50 lbs.)

List: $2325.00 SAVE $1030.00! BOGBT206SP

SIERRA DATA SCIENCES & MICROPOLIS

DEST OF BOTH WORLDS! PERFORMANCE & LOW COST!!

- Z80A 4MHz CPU • 64K RAM • 2 Serial RS-232 Ports • Floppy Disk Interface Controls Four 8" or 5¼" Drives • 35 Mbytes of mass storage • CP/M 2.2 with the Sierra Data Menu Driven BIOS • Winchester Hard Disk Adaptor • Disk Drive Power Supply and Cabinet • Drive Data Cable • S-100 IEEE Compatible

PACKAGE CONTAINS:		
BOSOSSBC	SBC Computer	$650.00
BOSOSH01	Hard Dis Cont.	$150.00
BOSDSWNMCP	Disk Cab & P.S.	$495.00
BOMCP12231	35 Mbyte Hard Disk	$3595.00
BONSDSCPM	CP/M 2.2 w/BIOS	$150.00
		$5240.00

TOTAL PACKAGE PRICE: **$4795.00** SAVE $445.00!!

(Shipped in 5 boxes, total Sh. Wt: 81 lbs.) BOPOBSDSMCP

S-100 BOARDS

SSM

Part No.	Description	List Price	Our Price
BOSSMPB1A	2708/2716 Programmer & EPROM	$265.00	$219.89
BOSSMI05A	I05 Input/Output	$329.00	$289.89
BOSSMI08A	I08 Eight Serial I/O	$550.00	$469.89
BOSSMID4A	2 Parallel, 2 Serial I/O	$290.00	$249.89
BOSSMVB3A2480	x 24 Video Board	$499.00	$440.00

DUAL

BODULCPU68000	68000 S-100 CPU	$895.00	$850.00
BODULDMEM256K	256K Dynamic Memory Card	$1295.00	$1230.00
BODULCMEM32	32K CMOS Memory Card	$695.00	$660.00
BODULEPROM32	2716 EPROM Board	$295.00	$280.00
BODULSIO4DMA	SIO4-DMA	$695.00	$650.00

CALIFORNIA COMPUTER

BOCCS2810A	Z80A CPU w/RS232	$325.00	$289.89
BOCCS271001	4 Port Serial I/O	$325.00	$310.00
BOCCS271901	2 Serial, 2 Centronics Par	$360.00	$345.00
BOCCS272001	4 Port Parallel I/O	$275.00	$265.00
BOCCS273001	6 Port Serial I/O	$550.00	$525.00
BOCCS2422A	Floppy disk controller w/CP/M	$425.00	$375.00

2 QUME DT8s 8" DOUBLE SIDED DISK DRIVE AND A CCS2422A FLOPPY DISK CONTROLLER WITH CP/M 2.2®!!!

- 2 double sided 8" QUME DT8s
- CCS2422A Flopy Disk Controller w/CP/M®
- Controls up to four 8" and/or 5¼" drives simultaneously
- CompuPro cabinet with power supply and internal data cable
- External data cable included

SAVE $1274.77!! **$1495.00** BOPOBGBTCCS *LIST PRICE: $2769.88*

(Shipping Charge: $22.20; shipped in two boxes)

MasterCard VISA **PRIORITY ONE ELECTRONICS** MEMBER MTIA NEDA

9161 DEERING AVE CHATSWORTH, CA 91311

ORDER TOLL FREE (800) 423-5922 - CA, AK, HI CALL (213) 709-5111

Terms: U.S. VISA, MC, BAC, Check, Money Order. U.S. funds only. CA residents add 6½% Sales Tax. MINIMUM PREPAID ORDER $15.00. Include MINIMUM SHIPPING & HANDLING of $3.00 for the first 3 lbs. plus .40¢ for each additional pound. Orders over 50 lbs. sent freight collect. Just in case, please include your phone number. Prices subject to change without notice. We will do our best to maintain prices through March, 1983. Credit Card orders will be charged appropriate freight. If you haven't received your Winter '83 Engineering Selection guide, send $1.00 for your copy today! Sale prices for prepaid orders only.

RETAIL STORE PHONE NUMBERS: (Chatsworth:) (213) 709-5464 - (Irvine:) (714) 660-1411

Circle 356 on Inquiry card.

www.americanradiohistory.com

Micromint will put both a computer development system and an OEM dedicated controller in the palm of your hand for as little as $127.*

The Z8 Basic Computer/Controller represents a milestone in microcomputer price-performance. The entire computer is 4" by 4½" and includes a tiny BASIC interpreter, 4K bytes of program memory, one RS-232 serial port and two parallel ports plus a variety of other features. The Z8 microcomputer board is completely self-contained and optimized for use as a dedicated controller. Can be battery operated. Comes with over 200 pages of documentation.

Z8 BASIC COMPUTER/CONTROLLER



- Uses Zilog Z8671 single chip microcomputer
- On board tiny BASIC interpreter
- 2 parallel ports plus serial I/O port.
- Just connect a CRT terminal and write control programs in BASIC
- 4K bytes of RAM. EPROM pin compatible
- Baud rates 110-9600 BPS
- Data and address buses available for 124K memory and I/O expansion
- Consumes only 1.5 watts at +5, +12 & −12v.

BCC01 Z8 Basic Computer Assembled & Tested .. $199.00
BCC02 Z8 Basic Computer Kit $169.00

COMING SOON
A/D Converter 8 Channel 8 Bit
AC I/O Board
- *4 Channel 115Vac inputs*
- *4 Channel 115Vac outputs*

20 MA ADAPTER

Z8 MEMORY, I/O EXPANSION & CASSETTE INTERFACE



The Z8 Memory, I/O Expansion & Cassette Interface Board (Z8 Expansion Board for short) allows you to add up to 8K of additional memory plus three 8-bit parallel ports to your Z8 Basic Computer/Controller. The memory expansion will support any combination of byte wide RAM memory chips or 2716 or 2732 EPROM. The cassette interface is 300 baud Kansas City Standard (2400Hz/1200Hz).

BCC03 Z8 Expansion Board w/4K memory $140.00
BCC04 Z8 Expansion Board w/8K memory .. $170.00

Z8 EPROM PROGRAMMER



The EPROM Programmer board allows you to transfer application programs in BASIC or Assembly language directly from RAM to either 2716 or 2732 EPROMS. Requires Z8 Basic Expansion Board for operation.
NOTE: We recommend the higher current UPS03 or UPS04 power supply when using the EPROM Programmer.

BCC07 Z8 EPROM Programmer Assembled & Tested ... $145.00

Z8 SERIAL EXPANSION BOARD



The Serial Expansion Board adds an additional RS-232C serial port to the Z8 system. It runs at 75 to 19,200 baud in all standard protocols. The 20 ma. current loop is opto-isolated for reliability and protection.

BCC08 Z8 Serial Board Assembled & Tested ... $180.00

MOTHER-BOARD

MB02 Z8 Mother Board with 5 connectors (Gold) Assembled & Tested $81.00

UNIVERSAL POWER SUPPLY

+5@300 ma. +12 & −12V@50 ma.
UPS01 Assembled and Tested ..... $ 35.00
UPS02 Kit ..... $ 27.00

+5@1 amp. +12 & −12V@50 ma.
UPS03 Assembled and Tested ..... $ 60.00
UPS04 Kit ..... $ 50.00

Z8 CROSS ASSEMBLERS

FROM ALLEN ASHLEY
XAS01 For TRS-80 Mod I $ 75.00
XAS02 For TRS-80 Mod III $ 75.00
XAS03 For CP/M-8" $150.00

FROM MICRO RESOURCES
MR01 CP/M-8" Diskette . $ 75.00
MR02 APPLE II CP/M 5¼" $ 75.00

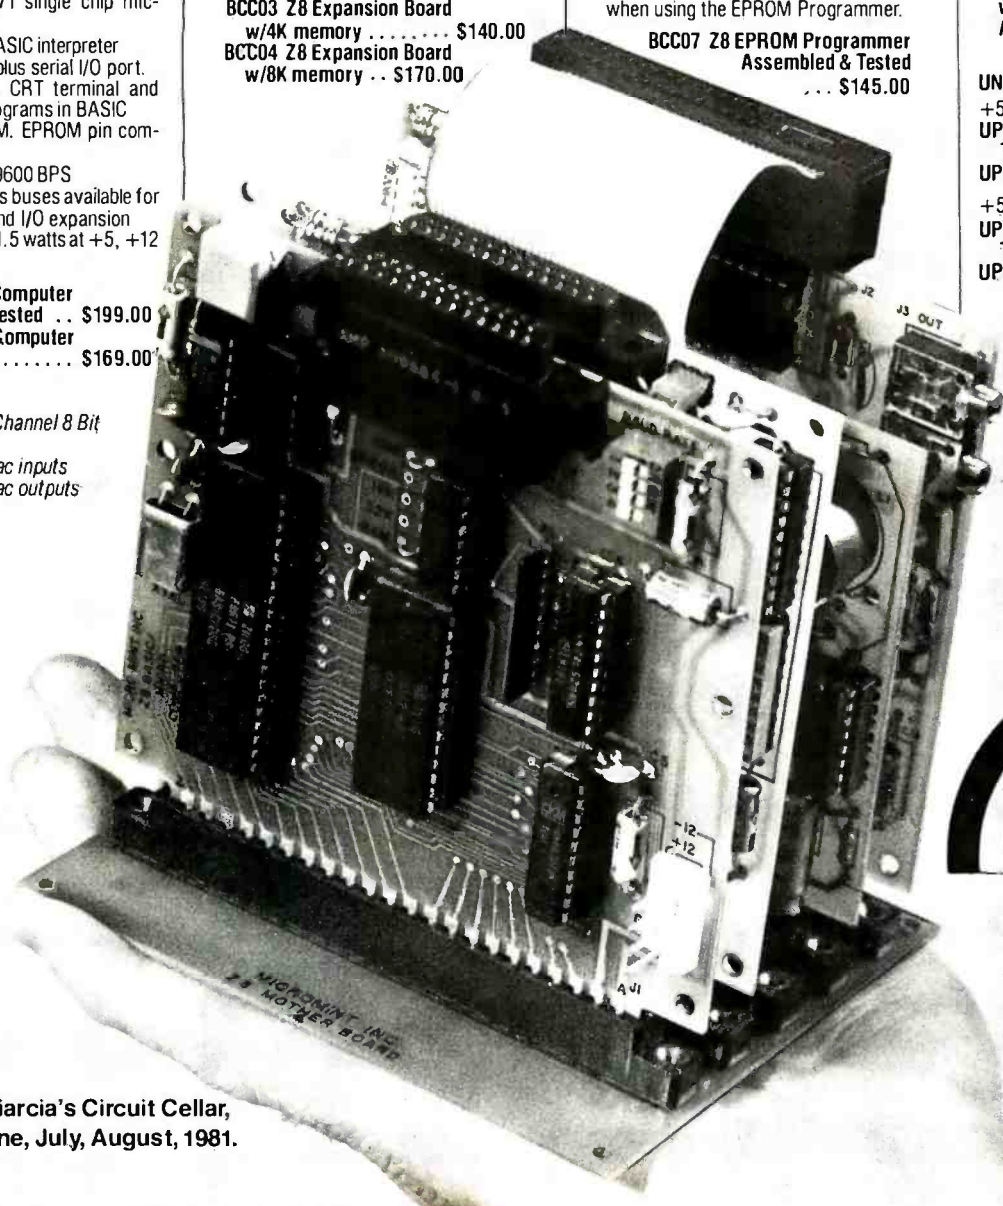

s featured in Ciarcia's Circuit Cellar, Byte Magazine, July, August, 1981.

MICRO MINT

MICROMINT INC.
561 Willow Avenue
Cedarhurst, NY 11516

To Order:
Call Toll Free
1-800-645-3479
For Information Call:
1-516-374-6793

Circle 481 on Inquiry card.

Z8 is a trademark of Zilog Inc. CP/M is a trademark of Digital Research

***In quantities of 100**

www.americanradiohistory.com

4164 64K DYNAMIC 200 NS $6.25

TMM2016 2KX8 STATIC 200 NS $4.15

ALL MERCHANDISE 100% GUARANTEED!

CALL US FOR VOLUME QUOTES

STATIC RAMS

2101	256 x 4	(450ns)	1.95
5101	256 x 4	(450ns) (cmos)	3.95
2102-1	1024 x 1	(450ns)	.89
2102L-4	1024 x 1	(450ns) (LP)	1.29
2102L-2	1024 x 1	(250ns) (LP)	1.69
2111	256 x 4	(450ns)	2.99
2112	256 x 4	(450ns)	2.99
2114	1024 x 4	(450ns)	8/14.95
2114L-4	1024 x 4	(450ns) (LP)	8/15.25
2114L-3	1024 x 4	(300ns) (LP)	8/15.45
2114L-2	1024 x 4	(200ns) (LP)	8/15.95
2147	4096 x 1	(55ns)	4.95
TMS4044-4	4096 x 1	(450ns)	3.49
TMS4044-3	4096 x 1	(300ns)	3.99
TMS4044-2	4096 x 1	(200ns)	4.49
MK4118	1024 x 8	(250ns)	9.95
TMM2016-200	2048 x 8	(200ns)	4.15
TMM2016-150	2048 x 8	(150ns)	4.95
TMM2016-100	2048 x 8	(100ns)	6.15
HM6116-4	2048 x 8	(200ns) (cmos)	4.95
HM6116-3	2048 x 8	(150ns) (cmos)	5.95
HM6116-2	2048 x 8	(120ns) (cmos)	8.95
HM6116LP-4	2048 x 8	(200ns) (cmos)(LP)	6.95
HM6116LP-3	2048 x 8	(150ns) (cmos)(LP)	8.95
HM6116LP-2	2048 x 8	(120ns) (cmos)(LP)	10.95
Z-6132	4096 x 8	(300ns) (Qstat)	34.95

LP = Low Power Qstat = Quasi-Static

DYNAMIC RAMS

TMS4027	4096 x 1	(250ns)	1.99
UPD411	4096 x 1	(300ns)	3.00
MM5280	4096 x 1	(300ns)	3.00
MK4108	8192 x 1	(200ns)	1.95
MM5298	8192 x 1	(250ns)	1.85
4116-300	16384 x 1	(300ns)	8/11.75
4116-250	16384 x 1	(250ns)	8/11.95
4116-200	16384 x 1	(200ns)	8/13.95
4116-150	16384 x 1	(150ns)	8/15.95
4116-120	16384 x 1	(120ns)	8/29.95
2118	16384 x 1	(150ns) (5v)	4.95
4164-200	65536 x 1	(200ns) (5v)	6.25
4164-150	65536 x 1	(150ns) (5v)	7.25

5V = single 5 volt supply

EPROMS

1702	256 x 8	(1us)	4.50
2708	1024 x 8	(450ns)	3.95
2758	1024 x 8	(450ns)(5v)	5.95
2716	2048 x 8	(450ns)(5v)	3.95
2716-1	2048 x 8	(350ns)(5v)	6.25
TMS2516	2048 x 8	(450ns)(5v)	5.50
TMS2716	2048 x 8	(450ns)	7.95
TMS2532	4096 x 8	(450ns)(5v)	7.95
2732	4096 x 8	(450ns)(5v)	4.95
2732-250	4096 x 8	(250ns)(5v)	12.95
2732-200	4096 x 8	(200ns)(5v)	16.95
2764	8192 x 8	(450ns)(5v)	16.95
2764-250	8192 x 8	(250ns)(5v)	18.95
2764-200	8192 x 8	(200ns)(5v)	24.95
TMS2564	8192 x 8	(450ns)(5v)	24.95
MC68764	8192 x 8	(450ns)(5v)(24 pin)	39.95

5v = Single 5 Volt Supply

EPROM ERASERS

	Timer	Capacity Chip	Intensity (uW/Cm²)	
PE-14		6	5,200	83.00
PE-14T	X	6	5,200	119.00
PE-24T	X	9	6,700	175.00
PL-265T	X	20	6,700	255.00
PR-125T	X	16	15,000	349.00
PR-320	X	32	15,000	595.00

DISC CONTROLLERS

1771	16.95
1791	29.95
1793	38.95
1795	54.95
1797	54.95
6843	34.95
8272	39.95
UPD765	39.95
1691	18.95
2143	18.95

INTERFACE

8T26	1.69
8T28	2.49
8T95	.99
8T96	.99
8T97	.99
8T98	.99
DM8131	2.95
DP8304	2.29
DS8835	1.99
DS8836	.99

MISC.

3242	7.95
3341	4.95
MC3470	4.95
MC3480	9.00
11C90	13.95
95H90	7.95
2513-001 UP	9.95
2513-002 LOW	9.95

SOUND CHIPS

76477	3.95
76489	8.95
AY3-8910	12.95
MC3340	1.49

CRT CONTROLLERS

6845	14.95
68B45	35.95
HD46505SP	15.95
6847	12.25
MC1372	6.95
68047	24.95
8275	29.95
7220	99.95
CRT5027	39.95
CRT5037	49.95
TMS9918A	39.95
DP8350	49.95

BIT-RATE GENERATORS

MC14411	11.95
BR1941	11.95
4702	12.95
COM5016	16.95
COM8116	10.95
MM5307	10.95

UARTS

AY3-1014	6.95
AY5-1013	3.95
AY3-1015	6.95
PT1472	9.95
TR1602	3.95
2350	9.95
2651	8.95
TMS6011	5.95
IM6402	7.95
IM6403	8.95
INS8250	14.95

KEYBOARD CHIPS

AY5-2376	11.95
AY5-3600	11.95

CLOCK CIRCUITS

MM5314	4.95
MM5369	3.95
MM5375	4.95
MM58167	8.95
MM58174	11.95
MSM5832	6.95

Z-80

2.5 Mhz

Z80-CPU	3.95
Z80-CTC	5.95
Z80-DART	15.25
Z80-DMA	17.50
Z80-PIO	5.75
Z80-SIO/0	18.50
Z80-SIO/1	18.50
Z80-SIO/2	18.50
Z80-SIO/9	16.95

4.0 Mhz

Z80A-CPU	6.00
Z80A-CTC	8.65
Z80A-DART	18.75
Z80A-DMA	27.50
Z80A-PIO	6.00
Z80A-SIO/0	22.50
Z80A-SIO/1	22.50
Z80A-SIO/2	22.50
Z80A-SIO/9	19.95

6.0 Mhz

Z80B-CPU	17.95
Z80B-CTC	15.50
Z80B-PIO	15.50

ZILOG

Z6132	34.95
Z8671	39.95

CRYSTALS

32.768 khz	1.95
1.0 mhz	4.95
1.8432	4.95
2.0	3.95
2.097152	3.95
2.4576	3.95
3.2768	3.95
3.579535	3.95
4.0	3.95
5.0	3.95
5.0688	3.95
5.185	3.95
5.7143	3.95
6.0	3.95
6.144	3.95
6.5536	3.95
8.0	3.95
10.738635	3.95
14.31818	3.95
15.0	3.95
16.0	3.95
17.430	3.95
18.0	3.95
18.432	3.95
20.0	3.95
22.1184	3.95
32.0	3.95

DATA ACQUISITION

ADC0800	15.55
ADC0804	3.49
ADC0809	4.49
ADC0817	9.95
DAC0800	4.95
DAC0806	1.95
DAC0808	2.95
DAC1020	8.25
DAC1022	5.95
MC1408L6	1.95
MC1408L8	2.95

8000

8035	5.95
8039	6.95
INS-8060	17.95
INS-8073	24.95
8080	3.95
8085	5.95
8085A-2	11.95
8086	29.95
8087	CALL
8088	39.95
8089	89.95
8155	7.95
8156	8.95
8185	29.95
8185-2	39.95
8741	39.95
8748	29.95
8755	32.00

8200

8202	29.95
8203	39.95
8205	3.50
8212	1.80
8214	3.85
8216	1.75
8224	2.25
8226	1.80
8228	3.49
8237	19.95
8238	4.49
8243	4.45
8250	10.95
8251	4.49
8253	6.95
8253-5	7.95
8255	4.49
8255-5	5.25
8257	7.95
8257-5	8.95
8259	6.90
8259-5	7.50
8271	39.95
8272	39.95
8275	29.95
8279	8.95
8279-5	10.00
8282	6.50
8283	6.50
8284	5.50
8286	6.50
8287	6.50
8288	25.00
8289	49.95

FUNCTION GENERATORS

MC4024	3.95
LM566	1.49
XR2206	3.75
8038	3.95

INTERSIL

ICL7103	9.50
ICL7106	9.95
ICL7107	12.95
ICL7660	2.95
ICL8038	3.95
ICM7207A	5.59
ICM7208	15.95

6800

68000	59.95
6800	4.95
6802	7.95
6808	13.90
6809E	19.95
6809	12.95
6810	2.95
6820	4.95
6821	3.25
6828	14.95
6840	12.95
6843	34.95
6844	25.95
6845	14.95
6847	12.25
6850	3.45
6852	5.75
6860	9.95
6862	11.95
6875	6.95
6880	2.25
6883	24.95
68047	24.95
68488	19.95
6800 = 1MHZ	
68B00	10.95
68B02	22.25
68B09E	29.95
68B09	29.95
68B10	7.95
68B21	12.95
68B45	35.95
68B50	12.95
68B00 = 2 MHZ	

6500

1 MHZ

6502	5.95
6504	6.95
6505	8.95
6507	9.95
6520	4.35
6522	8.75
6532	11.25
6545	22.50
6551	11.85
2 MHZ	
6502A	9.95
6522A	11.70
6532A	12.40
6545A	28.50
6551A	12.95
3 MHZ	
6502B	14.95

EXAR

XR 2206	3.75
XR 2207	3.85
XR 2208	3.90
XR 2211	5.25
XR 2240	3.25

9000 SERIES

9316	1.00
9334	2.50
9368	3.95
9401	9.95
9601	.75
9602	1.50
96S02	1.95



JDR MICRODEVICES, INC.

1224 S. Bascom Avenue
San Jose, CA 95128
800-538-5000 • 800-662-6279 (CA)
(408) 995-5430 • Telex 171-110

VISIT OUR RETAIL STORE

— NEW HOURS —
M-W-F, 9-5
T-Th., 9-9 Sat. 11-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: For shipping include $2 for UPS Ground or $3 for UPS Blue Label Air. Items over 5 pounds require additional shipping charges. Foreign orders, include sufficient amount for shipping. There is a $10 minimum order. Bay Area and Los Angeles Counties add 6½% Sales Tax. Other California residents add 6% Sales Tax. We reserve the right to substitute manufacturer. Not responsible for typographical errors. Prices are subject to change without notice. We will match or beat any competitor's price provided it is not below our cost.

©1982 JDR MICRODEVICES, INC.

Circle 232 on Inquiry card.

www.americanradiohistory.com

2716 16K EPROMS $3.95 EACH

2732 32K EPROMS $4.95 EACH

ALL MERCHANDISE 100% GUARANTEED!

CALL US FOR VOLUME QUOTES

74LS00

74LS00	.24	74LS86	.39	74LS169	1.75	74LS323	3.50
74LS01	.25	74LS90	.55	74LS170	1.49	74LS324	1.75
74LS02	.25	74LS91	.89	74LS173	.69	74LS352	1.29
74LS03	.25	74LS92	.55	74LS174	.55	74LS353	1.29
74LS04	.24	74LS93	.55	74LS175	.55	74LS363	1.35
74LS05	.25	74LS95	.75	74LS181	2.15	74LS364	1.95
74LS08	.28	74LS96	.89	74LS189	8.95	74LS365	.49
74LS09	.29	74LS107	.39	74LS190	.89	74LS366	.49
74LS10	.25	74LS109	.39	74LS191	.89	74LS367	.45
74LS11	.35	74LS112	.39	74LS192	.79	74LS368	.45
74LS12	.35	74LS113	.39	74LS193	.79	74LS373	.99
74LS13	.45	74LS114	.39	74LS194	.69	74LS374	.99
74LS14	.59	74LS122	.45	74LS195	.69	74LS377	1.39
74LS15	.35	74LS123	.79	74LS196	.79	74LS378	1.18
74LS20	.25	74LS124	2.90	74LS197	.79	74LS379	1.35
74LS21	.29	74LS125	.49	74LS221	.89	74LS385	1.90
74LS22	.25	74LS126	.49	74LS240	.95	74LS386	.45
74LS26	.29	74LS132	.59	74LS241	.99	74LS390	1.19
74LS27	.29	74LS133	.59	74LS242	.99	74LS393	1.19
74LS28	.35	74LS136	.39	74LS243	.99	74LS395	1.19
74LS30	.25	74LS137	.99	74LS244	.99	74LS399	1.49
74LS32	.29	74LS138	.55	74LS245	1.49	74LS424	2.95
74LS33	.55	74LS139	.55	74LS247	.75	74LS447	.37
74LS37	.35	74LS145	1.20	74LS248	.99	74LS490	1.95
74LS38	.35	74LS147	2.49	74LS249	.99	74LS624	3.99
74LS40	.25	74LS148	1.35	74LS251	.59	74LS668	1.69
74LS42	.49	74LS151	.55	74LS253	.59	74LS669	1.89
74LS47	.75	74LS153	.55	74LS257	.59	74LS670	1.49
74LS48	.75	74LS154	1.90	74LS258	.59	74LS674	9.65
74LS49	.75	74LS155	.69	74LS259	2.75	74LS682	3.20
74LS51	.25	74LS156	.69	74LS260	.59	74LS683	3.20
74LS54	.29	74LS157	.65	74LS266	.55	74LS684	3.20
74LS55	.29	74LS158	.59	74LS273	1.49	74LS685	3.20
74LS63	1.25	74LS160	.69	74LS275	3.35	74LS688	2.40
74LS73	.39	74LS161	.65	74LS279	.49	74LS689	3.20
74LS74	.35	74LS162	.69	74LS280	1.98	74LS783	24.95
74LS75	.39	74LS163	.65	74LS283	.69	81LS95	1.49
74LS76	.39	74LS164	.69	74LS290	.89	81LS96	1.49
74LS78	.49	74LS165	.95	74LS293	.89	81LS97	1.49
74LS83	.60	74LS166	1.95	74LS295	.99	81LS98	1.49
74LS85	.69	74LS168	1.75	74LS298	.89	25LS2521	2.80
				74LS299	1.75	25LS2569	4.25

IC SOCKETS

	1-99	100
8 pin ST	.13	.11
14 pin ST	.15	.12
16 pin ST	.17	.13
18 pin ST	.20	.18
20 pin ST	.29	.27
22 pin ST	.30	.27
24 pin ST	.30	.27
28 pin ST	.40	.32
40 pin ST	.49	.39
64 pin ST	4.25	call
ST = SOLDERTAIL		
8 pin WW	.59	.49
14 pin WW	.69	.52
16 pin WW	.69	.58
18 pin WW	.99	.90
20 pin WW	1.09	.98
22 pin WW	1.39	1.28
24 pin WW	1.49	1.35
28 pin WW	1.69	1.49
40 pin WW	1.99	1.80
WW = WIREWRAP		
16 pin ZIF	6.75	call
24 pin ZIF	9.95	call
28 pin ZIF	10.95	call
ZIF = TEXTOOL (Zero Insertion Force)		

CONNECTORS

RS232 MALE	2.95
RS232 FEMALE	3.50
RS232 FEMALE RIGHT ANGLE	5.25
RS232 HOOD	1.25
S-100 ST	3.95
S-100 WW	4.95

DIP SWITCHES

4 POSITION	.85
5 POSITION	.90
6 POSITION	.90
7 POSITION	.95
8 POSITION	.95

7400

7400	.19	74132	.45
7401	.19	74136	.50
7402	.19	74141	.65
7403	.19	74142	2.95
7404	.19	74143	2.95
7405	.25	74145	.60
7406	.29	74147	1.75
7407	.29	74148	1.20
7408	.24	74150	1.35
7409	.19	74151	.55
7410	.19	74152	.65
7411	.25	74153	.55
7412	.30	74154	1.25
7413	.35	74155	.75
7414	.49	74156	.65
7416	.25	74157	.55
7417	.25	74159	1.65
7420	.19	74160	.85
7421	.35	74161	.69
7422	.35	74162	.85
7423	.29	74163	.69
7425	.29	74164	.85
7426	.29	74165	.85
7427	.29	74166	1.00
7428	.45	74167	2.95
7430	.19	74170	1.65
7432	.29	74172	5.95
7433	.45	74173	.75
7437	.29	74174	.89
7438	.29	74175	.89
7440	.19	74176	.89
7442	.49	74177	.75
7443	.65	74178	1.15
7444	.69	74179	1.75
7445	.69	74180	.75
7446	.69	74181	2.25
7447	.69	74182	.75
7448	.69	74184	2.00
7450	.19	74185	2.00
7451	.23	74186	18.50
7453	.23	74190	1.15
7454	.23	74191	1.15
7460	.23	74192	.79
7470	.35	74193	.79
7472	.29	74194	.85
7473	.34	74195	.85
7474	.33	74196	.79
7475	.45	74197	.75
7476	.35	74198	1.35
7480	.59	74199	1.35
7481	1.10	74221	1.35
7482	.95	74246	1.35
7483	.50	74247	1.25
7485	.59	74248	1.85
7486	.35	74249	1.95
7489	2.15	74251	.75
7490	.35	74259	2.25
7491	.40	74265	1.35
7492	.50	74273	1.95
7493	.35	74276	1.25
7494	.65	74279	.75
7495	.55	74283	2.00
7496	.70	74284	3.75
7497	2.75	74285	3.75
74100	1.75	74290	.95
74107	.30	74293	.75
74109	.45	74298	.85
74110	.45	74351	2.25
74111	.55	74365	.65
74116	1.55	74366	.65
74120	1.20	74367	.65
74121	.29	74368	.65
74122	.45	74376	2.20
74123	.49	74390	1.75
74125	.45	74393	1.35
74126	.45	74425	3.15
74128	.55	74426	.85
		74490	2.55

CMOS

4000	.29	4527	1.95
4001	.25	4528	1.19
4002	.25	4531	.95
4006	.89	4532	1.95
4007	.29	4538	1.95
4008	.95	4539	1.95
4009	.39	4541	2.64
4010	.45	4543	1.19
4011	.25	4553	5.79
4012	.25	4555	.95
4013	.38	4556	.95
4014	.79	4581	1.95
4015	.39	4582	1.95
4016	.39	4584	.75
4017	.69	4585	.75
4018	.79	4702	12.95
4019	.39	74C00	.35
4020	.75	74C02	.35
4021	.79	74C04	.35
4022	.79	74C08	.35
4023	.29	74C10	.35
4024	.65	74C14	.59
4025	.29	74C20	.35
4026	1.65	74C30	.35
4027	.45	74C32	.39
4028	.69	74C42	1.29
4029	.79	74C48	1.99
4030	.39	74C73	.65
4034	1.95	74C74	.65
4035	.85	74C76	.80
4040	.75	74C83	1.95
4041	.75	74C85	1.95
4042	.69	74C86	.39
4043	.85	74C89	4.50
4044	.79	74C90	1.19
4046	.85	74C93	1.75
4047	.95	74C95	.99
4049	.35	74C107	.89
4050	.35	74C150	5.75
4051	.79	74C151	2.25
4053	.79	74C154	3.25
4060	.89	74C157	1.75
4066	.39	74C160	1.19
4068	.39	74C161	1.19
4069	.29	74C162	1.19
4070	.35	74C163	1.19
4071	.29	74C164	1.39
4072	.29	74C165	2.00
4073	.29	74C173	.79
4075	.29	74C174	1.19
4076	.79	74C175	1.19
4078	.29	74C192	1.49
4081	.29	74C193	1.49
4082	.29	74C195	1.39
4085	.95	74C200	5.75
4086	.95	74C221	1.75
4093	.49	74C373	2.45
4098	2.49	74C374	2.45
4099	1.95	74C901	.39
14409	12.95	74C902	.85
14410	12.95	74C903	.85
14411	11.95	74C905	10.95
14412	12.95	74C906	.95
14419	7.95	74C907	1.00
14433	4.18	74C908	2.00
4502	.95	74C909	2.75
4503	.65	74C911	8.95
4508	1.95	74C912	8.95
4510	.85	74C914	1.95
4511	.85	74C915	1.19
4512	.85	74C918	2.75
4514	1.25	74C920	17.95
4515	1.79	74C921	15.95
4516	1.55	74C922	4.49
4518	.89	74C923	4.95
4519	.39	74C925	5.95
4520	.79	74C926	7.95
4522	1.25	74C928	7.95
4526	1.25	74C929	19.95

Prices Slashed! 74S00

74S00	.32	74S163	1.95
74S02	.35	74S168	3.95
74S03	.35	74S169	3.95
74S04	.35	74S174	.95
74S05	.35	74S175	.95
74S08	.35	74S181	3.95
74S09	.40	74S182	2.95
74S10	.35	74S188	1.95
74S11	.35	74S189	6.95
74S15	.35	74S194	1.49
74S20	.35	74S195	1.49
74S22	.35	74S196	1.49
74S30	.35	74S197	1.49
74S32	.40	74S201	6.95
74S37	.88	74S225	7.95
74S38	.85	74S240	2.20
74S40	.35	74S241	2.20
74S51	.35	74S244	2.20
74S64	.40	74S251	.95
74S65	.40	74S253	.95
74S74	.50	74S257	.95
74S85	1.99	74S258	.95
74S86	.50	74S260	.79
74S112	.50	74S274	19.95
74S113	.50	74S275	19.95
74S114	.55	74S280	1.95
74S124	2.75	74S287	1.90
74S132	1.24	74S288	1.90
74S133	.45	74S289	6.89
74S134	.50	74S301	6.95
74S135	.89	74S373	2.45
74S138	.85	74S374	2.45
74S139	.85	74S381	7.95
74S140	.55	74S387	1.95
74S151	.95	74S412	2.98
74S153	.95	74S471	4.95
74S157	.95	74S472	4.95
74S158	.95	74S474	4.95
74S161	1.95	74S482	15.25
74S162	1.95	74S570	2.95
		74S571	2.95

MasterCard VISA

ORDER TOLL FREE

800-538-5000

800-662-6279

(CALIFORNIA RESIDENTS)

IF YOU CAN FIND A PRICE LOWER ELSEWHERE, LET US KNOW AND WE'LL MEET OR BEAT THEIR PRICE!
(SEE TERMS BELOW)

- ★ **Computer managed inventory— virtually no back orders!**
- ★ **Very competitive prices!**
- ★ **Friendly staff!**
- ★ **Fast service — most orders shipped within 24 hours!**

LED DISPLAYS

HP 5082-7760	.6"	CC	1.29
MAN 72	.3"	CA	.99
MAN 74	.3"	CC	.99
FND-357 (359)	.375"	CC	1.25
FND-500 (503)	.5"	CC	1.49
FND-507 (510)	.5"	CA	1.49

LED LAMPS

	1-99	100-up
Jumbo Red	.10	.09
Jumbo Green	.18	.15
Jumbo Yellow	.18	.15

TRANSISTORS DIODES

PN2222	NPN SWITCH	TO-92	10/1.00	100/8.99
PN2907	PNP SWITCH	TO-92	10/1.25	100/10.99
2N2222	NPN SWITCH	TO-18	.25	50/10.99
2N2907	PNP SWITCH	TO-18	.25	50/10.99
2N3055	NPN POWER	TO-3	.79	10/6.99
3055T	NPN POWER	TO-220	.69	10/5.99
2N3904	NPN SWITCH	TO-92	10/1.00	100/8.99
2N3906	NPN SWITCH	TO-92	10/1.00	100/8.99
IN4148 (IN914)	SWITCHING		25/1.00	1000/35.00
IN4004	RECTIFIER		10/1.00	100/8.99

©1982 JDR MICRODEVICES, INC.

Circle 232 on Inquiry card.

www.americanradiohistory.com

LINEAR

LM301	.34	LM348	.99	NE564	2.95	LM1496	.85
LM301H	.79	LM350K	4.95	LM565	.99	LM1558H	3.10
LM307	.45	LM350T	4.60	LM566	1.49	LM1800	2.37
LM308	.69	LM358	.69	LM567	.89	LM1812	8.25
LM308H	1.15	LM359	1.79	NE570	3.95	LM1830	3.50
LM309H	1.95	LM376	3.75	NE571	2.95	LM1871	5.49
LM309K	1.25	LM377	1.95	NE592	2.75	LM1872	5.49
LM310	1.75	LM378	2.50	LM703	.89	LM1877	3.25
LM311	.64	LM379	4.50	LM709	.59	LM1889	1.95
LM311H	.89	LM380	.89	LM710	.75	LM1896	1.75
LM312H	1.75	LM380N-8	1.10	LM711	.79	LM2877	2.05
LM317K	3.95	LM381	1.60	LM723	.49	LM2878	2.25
LM317T	1.19	LM382	1.60	LM723H	.55	LM2900	.85
LM318	1.49	LM383	1.95	LM733	.98	LM2901	1.00
LM318H	1.59	LM384	1.95	LM741	.35	LM3900	.59
LM319H	1.90	LM386	.89	LM741N-14	.35	LM3905	1.25
LM319	1.25	LM387	1.40	LM741H	.40	LM3909	.98
LM320 (see 7900)		LM389	1.35	LM747	.69	LM3911	2.25
LM322	1.65	LM390	1.95	LM748	.59	LM3914	3.95
LM323K	4.95	LM392	.69	LM1014	1.19	LM3915	3.95
LM324	.59	LM394H	4.60	LM1303	1.95	LM3916	3.95
LM329	.65	LM399H	5.00	LM1310	1.49	MC4024	3.95
LM331	3.95	NE531	2.95	MC1330	1.69	MC4044	4.50
LM334	1.19	NE536	6.00	MC1349	1.89	RC4136	1.25
LM335	1.40	NE555	.34	MC1350	1.19	RC4151	3.95
LM336	1.75	NE556	.65	MC1358	1.69	LM4250	1.75
LM337K	3.95	NE558	1.50	MC1372	6.95	LM4500	3.25
LM337T	1.95	NE555	.34	LM1414	1.59	LM13080	1.29
LM338K	6.95	NE556	.65	LM1458	.59	LM13600	1.49
LM339	.99	NE558	1.50	LM1488	.69	LM13700	1.49
LM340 (see 7800)		NE561	24.95	LM1489	.69		

H = TO-5 CAN T = TO-220 K = TO-3

RCA

CA 3023	2.75	CA 3082	1.65
CA 3039	1.29	CA 3083	1.55
CA 3046	1.25	CA 3086	.80
CA 3059	2.90	CA 3089	2.99
CA 3060	2.90	CA 3096	3.49
CA 3065	1.75	CA 3130	1.30
CA 3080	1.10	CA 3140	1.15
CA 3081	1.65	CA 3146	1.85
		CA 3160	1.19

TI

TL494	4.20	75365	1.95
TL496	1.65	75450	.59
TL497	3.25	75451	.39
75107	1.49	75452	.39
75110	1.95	75453	.39
75150	1.95	75454	.39
75154	1.95	75491	.79
75188	1.25	75492	.79
75189	1.25	75493	.89
		75494	.89

BI FET

TL071	.79	TL084	2.19
TL072	1.19	LF347	2.19
TL074	2.19	LF351	.60
TL081	.79	LF353	1.00
TL082	1.19	LF355	1.10
TL083	1.19	LF356	1.10
		LF357	1.40

VOLTAGE REGULATORS

7805T	.89	7905T	.99
7808T	.89	7908T	.99
7812T	.89	7912T	.99
7815T	.89	7915T	.99
7824T	.89	7924T	.99
7805K	1.39	7905K	1.49
7812K	1.39	7912K	1.49
7815K	1.39	7915K	1.49
7824K	1.39	7924K	1.49
78L05	.69	79L05	.79
78L12	.69	79L12	.79
78L15	.69	79L15	.79
78H05K	9.95	LM323K	4.95
78H12K	9.95	UA78S40	1.95

T = TO-220 K = TO-3
L = TO-92

DISK DRIVES

TANDON

TM100-1 5¼" (FOR IBM) SS/DD **229.00**
TM100-2 5¼" (FOR IBM) DS/DD **295.00**

SHUGART

SA 400L 5¼" (40 TRACK) SS/DD **199.95**

SIEMENS

FD100-8 8" SS/DD (801 REPLACEMENT) **259.00**

PERTEC

FD-200 5¼" SS/DD **179.95**
FN-250 5¼" DS/DD **199.95**

RIBBON CABLE

CONTACTS	SINGLE COLOR		COLOR CODED	
	1'	10'	1'	10'
10	.50	4.40	.83	7.30
20	.65	5.70	1.25	11.00
26	.75	6.60	1.32	11.60
34	.98	8.60	1.65	14.50
40	1.32	11.60	1.92	16.80
50	1.38	12.10	2.50	22.00

WE HAVE THE COMPLETE LINE OF IDC AND D-SUBMINIATURE CONNECTORS

CABINET FOR 5¼" DISK DRIVE

★ COLOR MATCHES APPLE
★ FITS SHUGART

SPECIAL — $29.95

WIREWRAP CARDS

FR-4 Epoxy Glass Laminate
With Gold Plated Contact Fingers

S-100 BUSS

P100-1	Bare — No Foil Pads	15.95
P100-2	Horizontal BUSS	22.95
P100-3	Vertical BUSS	22.95
P100-4	Single Foil Pads Per Hole	23.95

APPLE

P500-1	Bare — No Foil Pads	15.95
P500-3	Horizontal BUSS	22.95
P500-4	Single Foil Pads Per Hole	23.95

IBM

IBM-PR	BUSS Lines + Pads	55.00

GENERAL PURPOSE

22/44 PIN (.156" SPACING)

P441-3	Vertical BUSS, 4.5" x 6"	13.95
P442-3	Vertical BUSS, 4.5" x 9"	14.95

36/72 PIN (.1" SPACING)

P721-3	Vertical BUSS, 4.5" x 6"	13.95
P722-3	Vertical BUSS, 4.5" x 9"	14.95

BEST SELLING BOOKS

OSBORNE/MC GRAW-HILL

Apple II User's Guide	16.95
CRT Controller's Handbook	9.95
68000 Assembly Language Programming	16.99
CBASIC User Guide	15.00

SYBEX

Your Your First Computer	8.95
The CP/M Handbook	14.95
The PASCAL Handbook	18.95
Microprocessor Interfacing Techniques	17.95

MICROCOMPUTER HARDWARE HANDBOOK

FROM ELCOMP — $14.95

Over 800 pages of manufacturers data sheets on most commonly used IC's.

Includes:
★ TTL — 74/74LS and 74F
★ CMOS
★ Voltage Regulators
★ Memory — RAM, ROM, EPROM
★ CPU's — 6800, 6500, Z80, 8080, 8085, 8086/8
★ MPU support & interface — 6800, 6500, Z80, 8200, etc.

BYPASS CAPS

.01 UF DISC	100/6.00
.1 UF DISC	100/8.00
.1 UF MONOLITHIC	100/15.00

WE NOW STOCK A COMPLETE LINE OF DISC, ELECTROLYTIC, MONOLITHIC AND TANTALUM CAPACITORS

RESISTORS

¼ WATT 5% CARBON FILM ALL STANDARD VALUES FROM 1 OHM TO 10 MEG OHM

50 PCS. SAME VALUE	.025 EA.
100 PCS. SAME VALUE	.02 EA.
1000 PCS. SAME VALUE	.015 EA.

JDR MICRODEVICES, INC.

1224 S. Bascom Avenue
San Jose, CA 95128
800-538-5000 • 800-662-6279 (CA)
(408) 995-5430 • Telex 171-110

VISIT OUR RETAIL STORE

— NEW HOURS —
M-W-F, 9-5
T-Th., 9-9 Sat. 11-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: For shipping include $2 for UPS Ground or $3 for UPS Blue Label Air. Items over 5 pounds require additional shipping charges. Foreign orders, include sufficient amount for shipping. There is a $10 minimum order. Bay Area and Los Angeles Counties add 6½% Sales Tax. Other California residents add 6% Sales Tax. We reserve the right to substitute manufacturer. Not responsible for typographical errors. Prices are subject to change without notice. We will match or beat any competitor's price provided it is not below our cost.

©1982 JDR MICRODEVICES, INC.

Circle 233 on inquiry card.

www.americanradiohistory.com

4116 16K DYNAMIC RAMS 250NS 8/$11.95 SET

ALL MERCHANDISE 100% GUARANTEED! **CALL US FOR VOLUME QUOTES**

NEW VIEWMAX 80

A **Full Function** 80 column card for Apple II* — Compare these features with any other:

- ★ 7x9 dot matrix; Upper and lower case with true descenders
- ★ Soft Video switch
- ★ Inverse video characters
- ★ Shift key support
- ★ Fully compatible with Apple* DOS, CP/M*, PASCAL, and most popular word processors
- ★ **2 YEAR WARRANTY**

$219.95

DISK DRIVE

- ★ Fully Apple* compatible
- ★ 35 Track — Will read half tracks!
- ★ Use with our controller (call for price) or with your Apple controller
- ★ Price includes case and cable — ready to plug in
- ★ Attractive cabinet matches Apple drive
- ★ 90-Day Warranty

$299.95

JDR 16K RAMCARD

For Apple II*

- ★ Expand your 48K Apple to 64K
- ★ Fully compatible with Apple Language System — Use in place of Apple Language card
- ★ Provides extra memory for Visicalc™
- ★ Run PASCAL, FORTRAN, Integer Basic with appropriate software
- ★ Highest quality card features: gold edge connector, sockets for all IC's

NOW WITH 2 YEAR WARRANTY

ASSEMBLED & TESTED WITH WARRANTY	$44.95
KIT — INCLUDES ALL PARTS & INSTRUCTIONS	$40.95
BARE PC CARD WITH INSTRUCTIONS	$14.95

JDR COOLING FAN

FOR YOUR APPLE II

- ★ Easy installation — no modification of Apple required
- ★ Eliminates overheating problems
- ★ Switch on front controls fan, Apple, and extra outlet
- ★ Rotron whisper fan is the quietest, most reliable on the market

$69.95

ORDER TOLL FREE

800-538-5000

800-662-6279

(CALIFORNIA RESIDENTS)

IF YOU CAN FIND A PRICE LOWER ELSEWHERE, LET US KNOW AND WE'LL MEET OR BEAT THEIR PRICE!
(SEE TERMS BELOW)

- ★ **Computer managed inventory— virtually no back orders!**
- ★ **Very competitive prices!**
- ★ **Friendly staff!**
- ★ **Fast service — most orders shipped within 24 hours!**

VISA MasterCard

MONITORS

GREEN PHOSPHOR

NEC JB1201M	$169.00
ZENITH ZVM-121	$119.00

COLOR

AMDEK COLOR 1	$335.00

OKIDATA PRINTERS

- ★ 120 cps, 9x9 Dot Matrix
- ★ 50% faster than EPSON
- ★ Parallel **and** Serial interfaces are standard

ML-82A	$479.50
ML-83A	$699.95
ML-84 PARALLEL	$1059.00

CALL FOR PRICES ON 82A TRACTOR OPTION AND 82A, 83A GRAPHICS OPTION. CABLES AND INTERFACE CARDS AVAILABLE

5¼" DISKETTES

ATHANA SS SD SOFT	24.95
MEMOREX SS SD SOFT	26.95
VERBATIM SS DD SOFT	29.95
VERBATIM 10 SECT. HARD	29.95

NASHUA

TOP QUALITY — LOW PRICE!

Single Sided, Single Density Soft Sectored **with Hub Ring**

$19.95 BOX OF 10

NEWPORT PROSTICK

- ★ Professional Quality Atari-Type Joystick
- ★ **Extremely Rugged** — Actual Arcade game Joystick
- ★ All parts are replaceable
- ★ **6 Month Warranty**

$31.00 EA $59.95 PR

POWER SUPPLY $39.95

MOUNTED ON PC BOARD
MANUFACTURED BY CONVER
+5 VOLT 4 AMP
±12 VOLT 1 AMP

SPECIAL THANKS TO MARC AND AL FOR THEIR HARD WORK AND DEDICATION

*APPLE IS A TRADEMARK OF APPLE COMPUTER, INC.

©1982 JDR MICRODEVICES, INC.

Circle 233 on Inquiry card.

www.americanradiohistory.com

U.S. MICRO SALES

★ MADE IN U.S.A. BY AMERICANS ★

S-100-4 MINI'S

Choose the System that fits your needs!
A complete computer system ready to add on a terminal and printer. All Systems include CP/M® software and system manual set. Full six-month parts and labor warranty excluding drives which carry the full O.E.M. manufacturers warranty. All **S-100-4** Systems advertised are in stock assembled and tested available for immediate delivery.

DUAL DRIVE SUBSYSTEMS

HORIZONTAL OR VERTICAL
Fully Assembled and Tested Units

w/two Shugart 801R SS/DD	$ 975.00
w/two Shugart 851R DS/DD	1225.00
w/two Siemans 120-8 SS/DD	675.00
w/two Qume DT-8 DS/DD	1250.00
w/two Tandon 848-1 SS/DD	995.00
w/two Tandon 848-2 DS/DD	1195.00
Cabinet A & T w/Power Supply and Accs.	235.00
Cabinet Top and Bottom	*Only*—69.50

California Computer Systems *SPECIAL!*

CCS SYSTEM 2410 . . $1995.00

- Includes CP/M® 2.2
- 2-Serial/1-Parallel Port
- DMA Disk Controller
- Hardware Vectored Interrupts
- 2-Real Time Clocks
- Supports CP/M®,MP/M®,OASIS

CCS 2300 System, A & T . . 1695.00

- 2810 CPU . . . . . *Only*—255.00
- 2422 Disk Controller . . . . . *Only*—330.00
- 2066 64K . . . . . *Only*—360.00
- 2300A Mainframe **NEW!** . . . *Only*—455.00
- CCS Apple Boards . . . **Call Toll Free For Prices**

MINI FLOPPY

Only $1395.00
COMPLETE

- ★ with 48 TPI single sided double density 5¼" . $1395.00
- ★ with 48 TPI double sided double density 5¼" . $1495.00
- ★ with 96 TPI double sided double density 5¼" . $1650.00

An inexpensive but powerful system featuring a 4 slot **S-100** bus chassis with the **XOR S-100** board set; 4-MHZ Z-80 CPU ★ 64K dynamic memory ★ multi-sector mixed density disk controller ★ 2-RS232 output ports in the rear for your terminal and printer ★ 3 eight-bit parallel ports on the CPU ready to add a cable and interface to your printer ★ All above systems are in stock ★ Includes CP/M® 2.2.

CP/M is a trademark of Digital Research

HARD DISK

Only $2995.00
COMPLETE

These **S-100-4** Systems may be very small in size (9"H x 9½"W x 18½"L) but look at the size of the ATASI® 5¼" Winchester hard disks we offer!

4 models to choose from

- ★ Seagate 5 Megabyte System . . . $2995.00
- ★ #3020 15.6 Megabyte* System . . . $3495.00
- ★ #3033 26 Megabyte* System . . . $3995.00
- ★ #3046 36 Megabyte* System . . . $4495.00

The above systems include a 96 TPI double sided double density 5¼" floppy as standard. The hard disk is controlled via Western Digital's controller for hard disks. Other features are the same as system at left.
*Megabyte sizes mentioned above are the available storage space after formatting.

TAPE BACKUP

WITH HARD DISK

Only $4250.00
COMPLETE

Now available through U.S Micro Sales, the **XOR IRWIN 510 S-100-4** tape backup system with 10 megabytes of hard disk storage. Back up your hard disk on a mini-tape (we're talking 10 meg.) in less than 3½ minutes! The above system includes a 96 TPI DS/DD floppy drive and this system's modular design allows you to add a second floppy for only $395.00.

★★★ XOR COMPATIBLE SOFTWARE ★★★

WORD PROCESSING & TEXT EDITING

WordStar	$275.00
MailMerge	100.00
SpellStar	175.00
Random House Thesaurus	135.00
TEX (Text Formatter)	90.00
Mince (Text Editor)	145.00
Scribble (Formatter)	145.00
(Both Mince & Scribble)	245.00
Final Word (Word Processor)	265.00
Peach Pack (4 Programs)	450.00
Spell Guard	225.00
WordMaster (Text Editor)	115.00
The Word Plus (Spelling Checker)	130.00

DATA APPLICATIONS

dBASE II	$595.00
Quickcode (Program Generator, Screen Builder for dBASE II	250.00
FMS-80	890.00
FMS-80-11	440.00
DataStar (Data Entry & Ret.)	245.00
CalcStar (Elec. Spreadsheet)	145.00
BT-80 (Rec. Retreival)	175.00
Access Manager (For B-Tree)	250.00
SuperCalc	265.00
Mailman (M/L Manager)	119.00
NAD (M/L Manager)	90.00
Recover (Lost Data Recovery)	65.00

LANGUAGES

MBasic-80	$290.00
MBasic Compiler	325.00
CBasic 2	100.00
CB-80 (Compiler)	455.00
Fortran-80	375.00
PL/I-80 (Language)	450.00
Pascal MT+ (Language)	445.00
Pascal MT+ (Compiler)	310.00
Cobol-80 (Language)	585.00
C Compiler (Language)	215.00
ADA (Compiler)	265.00
MAC (Macro Assem.)	85.00
Macro-80 (Macro Assem.)	150.00

Formats for XOR, NORTHSTAR, ALTOS, VECTOR GRAPHICS, Etc.

COMMUNICATIONS

Move-it	$ 80.00
Crosstalk	160.00
BSTAM	149.00
BSTMS	149.00
Term II	150.00

CP/M® HELPS

ATI-CP/M® Power 2.2 (Training)	75.00
Supervyz	95.00
CP+ (English Language Menus)	125.00
Smart Key	50.00
Smart Print	30.00
ISIS (CP/M®) (Translator)	199.00
Disk-Edit	90.00

ACCOUNTING

Peachtree - Series 4	
General Ledger	$395.00
Accounts Receivable	395.00
Accounts Payable	395.00
Inventory	395.00
Payroll	395.00
Peach Pak (G/L, A/R, A/P)	900.00
Accounting Plus	CALL
Structured Systems	CALL
Medical	845.00
Dental	845.00
Master Tax (Prof 1040)	1500.00
Standard Tax (A 1040)	550.00

OTHER APPLICATIONS

SuperSort	$190.00
M-Sort	170.00
Q-Sort	89.00
Disk Doctor	89.00
Pearl 1 (Entry Lev. Prg. Gen.)	45.00
Pearl 2 (Int. Prog. Gen)	250.00
Pearl 3 (Advanced)	450.00
ATI D.B. Power (dBase II Training)	75.00
ATI SuperCalc (Training)	75.00
ATI MBasic (Training)	75.00
ATI WordStar (Training)	75.00
DeSpool (Background Print Utility)	45.00
ZSID (Debugger)	89.00

Circle 437 on inquiry card.

www.americanradiohistory.com

TWO Locations to Serve You

☆ *EAST Coast Call (815) 485-4002*

☆ *WEST Coast Call (714) 891-2677*

OUT OF STATE **ORDER TOLL FREE!** **1 - 800 - 435-9357**

U.S. MICRO SALES

★ *MADE IN U.S.A. BY AMERICANS* ★

TERMS: We accept VISA/MC, prepay, check or money order. Please allow personal check two weeks to clear before shipment. $5.00 handling charge on all orders under $50.00. 15% Restocking Fee. All orders shipped via U.P.S. unless otherwise specified. All UPS C.O.D. orders over $100.00 require a Cashiers Check. ★ Our products carry a full 6 months parts and labor warranty excluding drives, printers and terminals which carry the full O.E.M. factory warranty. PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

★ *EAST* ★ *11 Edison Drive, New Lenox, Illinois 60451*
★ *WEST* ★ *6182 Garden Grove Blvd., Westminster, CA 92683*

UNIVERSAL POWER SUPPLY

For Big Board, Apple or Aim 65
+5VDC @ 3 Amps
+12VDC @ .750 Amps
−12VDC @ .750Amps
−5VDC @ .500 Amps
Dimensions: 4" x 4" x 11"

$69.95

DISK DRIVE POWER SUPPLY

For 2 - 8" or 5" Drives
+ 5VDC @ 4 Amps
+24VDC @ 3 Amps
− 5VDC @ 1 Amp
AC Cables for 2 Drives **$7.50**
Dimensions: 4" x 4" x 11"

$59.95

S-100 POWER SUPPLY

+8VDC @ 30 Amps
+16VDC @ 6 Amps
−16VDC @ 6 Amps
PC Board Design
Dimensions: 5" x 6" x 11"

$89.50

TERMINALS

Televideo 910+ with green screen...	$575.00
T.V. 925... 739.00 T.V. 950...	945.00
Adds Viewpoint Model 3A+	519.00
Zenith Z-19	740.00

PRINTERS

Gemini Star 10	$ CALL
Epson MX-80FT	$549.00
Epson MX-100FT	699.00
Okidata 82A 80 Column	465.00
Okidata 83A 132 Column	745.00
C-ITOH Prowriter I	525.00
I.D.S. Microprism Model 480	565.00

8" DISK DRIVES

SA801R	$388.00ea.	Two for	$379.00ea.
SA851R	535.00ea.	Two for	529.00ea.
QUME DT-8 ...	540.00ea.	Two for	529.00ea.
Tandon 848-1...	395.00ea.	Two for	388.00ea.
Tandon 848-2...	525.00ea.	Two for	519.00ea.

BLOWOUT SPECIAL

Siemans 120-8 SS/DD (full 90 day warranty) **235.00**

S-100 MOD KIT by XOR



For test or systems applications.
Complete **S-100** 12 Slot Mainframe with Disk Drive Power Supply for 4 Drives.

SPECIFICATIONS

Unregulated	Regulated
+8V @ 30A	+5V @ 5A
±16V @ 6A	+24V @ 3A
	−5V @ 1A

$225.00 Kit with 12 S-100 Bus Connectors
$255.00 Assem. and Tested with 12 Bus Connectors
$15.00 AC/DC Drive Cable Set for 2 Drives
Dimensions 6" x 10" x 18" — Shipping Weight 25 lbs.

Cooling Power

4⅛"

Low Velocity Whisper™ Fans *Only* $18.00 ea.
Finger Guards $2.50 each.



XOR S-100 MOD

CUSTOMER SERVICE HOTLINE 1 - (714) 898-5525

S-100-4

$1695.00

★ 4 Slot **S-100** Bus
★ Two Separate Power Supplys
★ **XOR S-100** Board Set
★ Inculdes CP/M® 2.2 and Manl
★ All Cables Provided
★ Dimensions only 9" x 9" x 18½"

S-100-4 System Complete with:

2-Tandon Thinline 8" (Model TM-848-1 SS/DD)
Part#S-1000-40..... **$1695.00**

2-Tandon Thinline 8" (Model TM-848-2 DS/DD)
Part#S-1000-39..... **$1950.00**

★★★SPECIAL OF THE MONTH★★★

8" Dual Drive Subsytem 1.2 Meg Includes two Siemans 120-8 SS/DD Drives, Cables, Power Supplies and Cabinet. A & T..... *Only*—**$675.00**

S-100-8

$1795.00

TERMINAL

★ Feather Touch Capacitance Kybrd
★ SOROC Type Screen Attribute Sel
★ Hall Intensity
★ 60 Key Standard ASCII
★ 8 Special Function Keys
★ 20 Screen Editing Keys

COMPUTER

★ **XOR S-100** Board Set
★ Programmable Keyboard Set
★ Includes CP/M® 2.2
★ 8 Slot **S-100** Bus

S-100-8 System Complete With:

Shugart 801R Subsystem* (#S-1000-22) ... **$2675.00**
Shugart 851R Subsystem* (#S-1000-23) ... **2925.00**
Qume DT-8 Subsystem* (#S-1000-24) **2950.00**
Shugart SA 400 Minis (#S-1000-25)..... **2350.00**
Complete System, No Drives (#S-1000-21).. **1795.00**

**Available in Horizontal or Vertical Cabinet*

100 MEG! IN YOUR S-100-12*

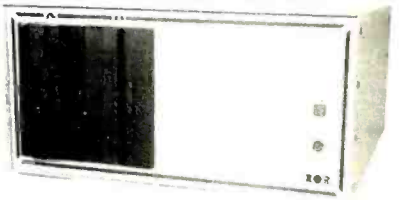

Introducing a major breakthrough in technology... The removable cartridge disk called the **Alpha-10™**. 10 megabytes of removable storage space (14 meg unformatted) with the speed and reliability a Winchester offers. The complete system includes the **XOR Z-80** based 64K board set, the **S1-MOD** power supply/mother board, the Alpha-10™ drive (w/ 3 cartridges), sitting alongside a Shugart 851 DS/DD multi-sector floppy disk, CP/M® 2.2 software and manuals, and we'll even throw in a 6 month parts and labor exclusive warranty.

(#S1000-75) ..... *Complete* **$3995.00**

If you already own an **S-100-12** w/2 floppies buy an Alpha-10™ upgrade package. Includes Alpha-10™ cartridge drive, cartridge control board, **S-100** interface board w/all necessary cables, software and manuals. System price includes 3 10 meg cartridges. (#S-1000-80)..... **$1995.00**

*Extra cartridges available (#M-2000-51), **$50.00**
ALPHA-10™ is a product manufactured by IOMEGA™ CORP.

Apple 8" Disk Controller Card **$395.00**
ZVX4 Dual Density, Single & Double Sided - Auto Boot Disk 2 + 2 Single Density Single or Dual Sided
SVA **300.00**

Complete line of add on drives for Apple
CALL TOLL FREE FOR PRICES

Ask about our Low Cost MODEM Software

Hayes - MicroModem 100 Ser/Por 110/300 Baud	$275.00
Hayes - Smart Modem 300 Baud Orig/Ans Director....	250.00
Novation - DCAT 300 Baud Direct Con. Ans/Orig.....	165.00
Novation - AUTOCAT Auto/Ans/Orig Direct Con....	235.00
Novation - APPLECAT 300/1200 Baud Direct Con....	350.00
PMMI - MM103 300/600 Baud (**S-100 BUS**)	359.00

SEE US AT THE WEST COAST COMPUTER FAIRE!

Civic Auditorium Brooks Hall, San Francisco
March 18,19,20, 1983 - Booths #1844 and #1846

Don't miss out ... Send us a postcard to get a **1983 Winter/Spring Catalog**

Circle 437 on inquiry card.

www.americanradiohistory.com

FOR ONLY $129.95 Learn Computing From The Ground Up

Build a Computer kit that grows with you, and can expand to 64k RAM, Microsoft BASIC, Text Editor/Assembler, Word Processor, Floppy Disks and more.

EXPLORER/85

Here's the low cost way to learn the fundamentals of computing, the all-important basics you'll need more and more as you advance in computer skills. For just $129.95 you get the advanced-design Explorer/85 motherboard, with all the features you need to learn how to write and use programs. And it can grow into a system that is a match for any personal computer on the market. Look at these features: 8085 Central Processing Unit, the microprocessor "heart" of the Explorer/85. (Join the millions who will buy and use the 8080/8085 this year alone!) . . . Four 8-bit plus one 6-bit input/output ports from which you can input and output your programs, as well as control exterior switches, relays, lights, etc. a cassette interface that lets you store and reload programs you've learned to write . . . deluxe 2,000 byte operating system/monitor makes it easy to learn computing in several important ways: • It allows simpler, faster writing and entering of programs • It permits access by you to all parts of the system so you can check on the status of any point in the program • It allows tracing each program step by step, with provision for displaying all the contents of the CPU (registers, flags, etc.) • . . . and it does much more!

You get all this in the starting level (Level A) of the Explorer/85 for only $129.95. Incredible! To use, just plug in your 8VDC power supply and terminal or keyboard/display — if you don't have them, see our special offers below.

☐ Level A computer kit (Terminal Version) . . . $129.95 plus $3 P&I.*
☐ Level A kit (Hex Keypad/Display Version) . . . $129.95 plus $3 P&I.*

LEVEL B — This "building block" converts the motherboard into a two-slot S100 bus (industry standard) computer. Now you can plug in any of the hundreds of S100 cards available.

☐ Level B kit . . $49.95 plus $2 P&I.*
☐ S100 bus connectors (two required) . . . $4.85 each, postpaid.

LEVEL C — Add still more computing power, this "building block" mounts directly on the motherboard and expands the S100 bus to six slots.

☐ Level C kit . . $39.95 plus $2 P&I.*
☐ S100 bus connectors (five required) . . . $4.85 each, postpaid.

LEVEL D — When you reach the point in learning that requires more memory, we offer two choices: either add 4k of memory directly on the motherboard, or add 16k to 64k of memory by means of a single S100 card, our famous "JAWS."

Level D kit (CHECK ONE) . . . ☐ 4k on-board . . $49.95 plus $2 P&I.*; ☐ 8k S100 "JAWS" . . . $149.95 plus $2 P&I.*; ☐ 32k S100 "JAWS" . . . $199.95 plus $2 P&I.*; ☐ 48k S100 "JAWS" . . . $249.95 plus $2 P&I.*; ☐ 64k S100 "JAWS" . . . $299.95 plus $2 P&I.*

LEVEL E — An important "building block:" it activates the 8k ROM/EPROM space on the motherboard. Now just plug in our 8k Microsoft BASIC or your own custom programs.

☐ Level E kit . . . $3.95 plus 50¢ P&I.*

Microsoft BASIC — It's the language that allows you to talk English to your computer! It is available three ways:

☐ 8k cassette version of Microsoft BASIC (requires Level B and 12k of RAM minimum; we suggest a 16k S100 "JAWS" — see above) . . . $64.95 postpaid.
☐ 8k ROM version of Microsoft BASIC (requires Level B & Level E and 4k RAM; just plug into your Level E sockets. We suggest either the 4k Level D RAM expansion or a 16k S100 "JAWS.") . . . $89.95 plus $2 P&I.*
☐ Disk version of Microsoft BASIC (requires Level B, 32k of RAM, floppy disk controller, 8" floppy disk drive) . . . $325 postpaid.

TEXT EDITOR/ASSEMBLER — The editor/assembler is a software tool (a program) designed to simplify the task of writing programs. As your programs become longer and more complex, the assembler can save you many hours of programming time. This software includes an editor program that enters the programs you write, makes changes, and saves the programs on cassettes. The assembler performs the clerical task of translating symbolic code into the computer-readable object code. The editor/assembler program is available either in cassette or a ROM version.

☐ Editor/Assembler (Cassette version; requires Level B and 8k (min.) of RAM — we suggest 16k "JAWS" — see above) . . . $39.95 plus $2 P&I.*
☐ Editor/Assembler (ROM version, supplied on an S100 card; requires Level B and 4k RAM (min.) — we suggest either Level D or 16k "JAWS") . . . $89.95 plus $2 P&I.*

8" FLOPPY DISK — A remarkable "building block." Add our 8" floppy disk when you need faster operation, more convenient program storage, perhaps a business application, and access to the literally thousands of programs and program languages available today. You simply plug them into your Explorer/85 disk system — it accepts all IBM-formatted CP/M programs.

☐ 8" Floppy Disk Drive . . $499.95 plus $12 P&I.*
☐ Floppy Controller Card . . $198.95 plus $2 P&I.*
☐ Disk Drive Cabinet & Power Supply . . $69.95 plus $3 P&I.*
☐ Drive Cables (set up for two drives) . . $25.00 plus $1.50 P&I.*
☐ CP/M 2.2 Disk Operating System: includes Text Editor/Assembler, dynamic debugger, and other features that give your Explorer/85 access to thousands of existing CP/M-based programs . . $150.00 postpaid.

NEED A POWER SUPPLY? Consider our AP-1. It can supply all the power you need for a fully expanded Explorer/85 (note: disk drives have their own power supply). Plus the AP-1 fits neatly into the attractive Explorer steel cabinet (see below).

☐ AP-1 Power Supply kit (8V @ 5 amps) in deluxe steel cabinet . . . $89.95 plus $2 P&I.*

NEED A TERMINAL? We offer you choices: the least expensive one is our Hex Keypad/Display kit that displays the information on a calculator-type screen. The other choice is our ASCII Keyboard/Computer Terminal kit, that can be used with either a CRT monitor or a TV set (if you have an RF modulator).

1. Plug in Netronics Hex Keypad/Display
2. Add Level B to convert to S100
3. Add 4k RAM
4. Plug in Level E here; accepts Microsoft BASIC or Editor/Assembler in ROM
5. Add two S100 boards
6. Add your own custom circuits (prototyping area)
7. Connect terminal

☐ Hex Keypad/Display kit . . . . $69.95 plus $2 P&I.*

☐ FASTERM - 64 TERMINAL KIT — Featuring a 56 key ASCII Keyboard, 128 character set upper and lower case, 75 ohm output, 8 baud rates (50 to 19,200 (switch selectable), RS232/C or 20 MA output, 32 or 64 character by 16 line formats, complete with Deluxe Steel Cabinet and Power Supply . . . $499.95 plus $3 P&I.*

☐ RF Modulator kit (allows you to use your TV set as a monitor) . . . $8.95 postpaid.
☐ 12" Video Monitor (10MHz bandwidth) . . . $129.95 plus $5 P&I.*
☐ Deluxe Steel Cabinet for the Explorer/85 . . . $49.95 plus $3 P&I.*
☐ Fan for cabinet . . . $15.00 plus $1.50 P&I.*

ORDER A SPECIAL-PRICE EXPLORER/85 PAK — THERE'S ONE FOR EVERY NEED.

☐ Beginner Pak (Save $26.00) — You get Level A (Terminal Version) with Monitor Source Listing ($25 value) AP-1, 5-amp. power supply, Intel 8085 Users Manual . . (Reg. $199.95) SPECIAL $169.95 plus $4 P&I.*

☐ Experimenter Pak (Save $53.40) — You get Level A (Hex Keypad/Display Version) with Hex Keypad/Display, Intel 8085 User Manual, Level A Hex Monitor Source Listing, and AP-1, 5-amp. power supply . (Reg $279.95) SPECIAL $219.95 plus $6 P&I.*

☐ Special Microsoft BASIC Pak (Save $103.00) — You get Levels A (Terminal Version), B, D (4k RAM), E, 8k Microsoft in ROM, Intel 8085 User Manual, Level A Monitor Source Listing, and AP-1, 5-amp. power supply (Reg. $439.70) SPECIAL $328.95 plus $7 P&I.*

☐ Add a Rom-Version Text Editor/Assembler (Requires levels B and D or $110 Memory) . . . $99.95 plus $2 P&I.*

Starter 8" Disk System — Includes Level A, 8 floppy disk controller, one CDC 8" disk drive, two-drive cable, two S100 connectors; just add your own power supplies, cabinets and hardware . . . ☐ (Reg. $1085.00) SPECIAL $999.95 plus $13 P&I.* . . . ☐ 32k Starter System, $1049.95 plus $13 P&I.* ☐ 48k Starter System, $1095.95 plus $13 P&I.* ☐ 64k Starter System, $1145.95 plus $13 P&I.*

☐ Add to any of above Explorer steel cabinet, AP-1 five amp. power supply, Level C with two S100 connectors, disk drive cabinet and power supply, two sub-D connectors for connecting your printer and terminal . (Reg $225.95) SPECIAL $199.95 plus $13 P&I.*

☐ Complete 64K System, Wired & Tested . . $1638.80 plus $28 P&I.*

☐ Special! Complete Business Software Pak (Save $623.00) — Includes CP/M 2.2 Microsoft BASIC, General Ledger, Accounts Receivable, Accounts Payable, Payroll Package . . . (Reg. $1325) SPECIAL $699.95 postpaid.

*P&I stands for "postage & insurance." For Canadian orders, double this amount.

Continental Credit Card Buyers Outside Connecticut:

TO ORDER Call Toll Free: 800-243-7428

To Order From Connecticut, or For Technical Assistance, Call (203) 354-9375

CP/M is a reg. trademark of Digital Research

★ (Clip and mail coupon) ★

SEND ME THE ITEMS CHECKED ABOVE

Total Enclosed (Conn. Residents add sales tax): $_____
Paid by:

☐ Personal Check ☐ Cashier's Check/Money Order

☐ VISA ☐ MASTER CARD (Bank No. _____)

Acct. No _____ Exp. Date _____

Signature _____

Print Name _____

Address _____

City _____

State _____ Zip _____

NETRONICS Research & Development Ltd.
333 Litchfield Road, New Milford, CT 06776

ANNOUNCING TWO NEW TERMINALS

Smart • Fast • Graphics • Matching Modem and $295 Printer

Netronics announces a state of the art breakthrough in terminals. Now at prices you can afford, you can go on-line with data-bank and computer phone-line services. It's all yours: "electronic newspapers," educational services, Dow-Jones stock reports, games, recipes, personal computing with any level language, program exchanges, electronic bulletin boards . . . and more every day!!!

Netronics offers two new terminals, both features a full 58 key/128 character typewriter-style keyboard, baud rates to 19.2 kilobaud, a rugged steel cabinet and power supply. The simplest one, FASTERM-64, is a 16 line by 64 or 32 character per line unit, with a serial printer port for making hard copy of all incoming data, and optional provisions for block and special character graphics. The "smart" version, SMARTERM-80, features either 24 line by 80 characters per line or 16 by 40 characters per line, it offers on-screen editing with page-at-a-time printing, 12,000 pixel graphics, line graphics, absolute cursor addressing, underlining, reverse video, one-half intensity and much more . . . simply plug them into your computer or our phone modem and be on-line instantly. Use your TV set (RF modulator required) or our delux green-phosphor monitor pictured above. For hard copy just add our matched printer.

Price breakthrough!!! Own the FASTERM-64, a complete terminal kit, ready to plug in for just $199.95 or order the SMARTERM-80 kit for just $299.95, (both available wired and tested.) Be on-line with the million-dollar computers and data services today . . . we even supply the necessary subscription forms.

More good news: All the components in our terminals are available separately (see coupon), so you buy only what you need!!!

FASTERM-64 . . . DISPLAY FORMAT: 64 or 32 characters/line by 16 lines . . . 96 displayable ASCII characters (upper & lower case) . . . 8 baud rates: 150, 300, 600, 1200, 2400, 4800, 9600, 19,200, (switch sel.) . . . LINE OUTPUT: RS232/C or 20 ma current loop . . . VIDEO OUTPUT: 1V P/P (EIA RS-170) . . . CURSOR MODES: home & clear screen, erase to end of line, erase cursor line, cursor up & down, auto carriage return/line feed at end of line & auto scrolling . . . REVERSE VIDEO . . . BLINKING CURSOR . . . PARITY: off, even or odd . . . STOP BITS: 1, 1.5, 2 . . . DATA BITS PER CHARACTER: 5, 6, 7 or 8 . . . CHARACTER OUTPUT: 5 by 7 dot matrix in a 7 by 12 cell . . . PRINTER OUTPUT: prints all incoming data . . . 1K ON BOARD RAM . . . 2K ON BOARD ROM . . . CRYSTAL CONTROLLED . . . COMPLETE WITH POWER SUPPLY . . . OPTIONAL GRAPHICS MODE: includes 34 Greek & math characters plus 30 special graphics characters . . . ASCII ENCODED KEYBOARD: 56 key/128 characters.

SMARTERM-80 . . . DISPLAY FORMAT: 80 characters by 24 lines or 40 characters by 16 lines, 128 displayable ASCII characters (upper & lower case) 8 baud rates: 110, 300, 600, 1200, 2400, 4800, 9600, 19, 200 . . . LINE OUTPUT: RS232/C or 20 ma current loop . . . VIDEO OUTPUT: 1V pp (EIA RS-170) . . . EDITING FEATURES: insert/delete line, insert/delete character, forward/back tab . . . LINE OR PAGE TRANSMIT . . . PAGE PRINT FUNCTION . . . CURSOR POSITIONING: up, down, right, left, plus absolute cursor positioning with read back . . . VISUAL ATTRIBUTES: underline, blink, reverse video, half intensity, & blank . . . GRAPHICS: 12,000 pixel resolution block plus line graphics . . . ON-SCREEN PARITY INDICATOR . . . PARITY: off, even or odd . . . STOP BITS: 1 10 baud 2, all others 1 . . . CHAR. OUTPUT: 7 by 11 character in a 9 by 12 block . . . PRINTER OUTPUT . . . 60 OR 50 Hz VERTICAL REFRESH . . . BLINKING BLOCK CURSOR . . . CRYSTAL CONTROLLED . . . 2K ON BOARD RAM . . . ASCII ENCODED KEYBOARD: 56 key/128 character . . . 4K ON BOARD ROM . . . COMPLETE WITH POWER SUPPLY.

TELEPHONE MODEM 103 O/A . . . FULL DUPLEX, FCC APPROVED . . . DATA RATE: 300 baud . . . INTERFACE: RS232/C and TTY . . . CONTROLS: talk/data switch (no need to connect and disconnect phone), originate/answer switch on rear panel . . . NO POWER SUPPLY REQUIRED.

ASCII KEYBOARD ASCII-3 . . . 56 KEY/128 CHARACTER ASCII ENCODED . . . UPPER & LOWER CASE . . . FULLY DEBOUNCED . . . 2 KEY ROLLOVER . . . POS OR NEG LOGIC WITH POS STROBE . . . REQUIRES +5 & -12V DC (SUPPLIED FROM VIDEO BOARDS)

PRINTER COMET I . . . SERIAL I/O TO 9600 BAUD . . . 80 CHARACTER COLUMN (132 COMPRESSED) . . . 10" TRACTOR FEED . . . UPPER/LOWER CASE . . . INDUSTRY STANDARD RIBBONS . . . 4 CHARACTER SIZES . . . 9 BY 7 DOT MATRIX . . . BI-DIRECTIONAL PRINTING



Continental U.S.A. Credit Card Buyers Outside Connecticut

CALL TOLL FREE 800-243-7428

To Order From Connecticut Or For Tech. Assist. Call (203) 354-9375

NETRONICS R&D LTD. Dept.
333 Litchfield Road, New Milford, CT 06776

Please send the items checked below:

☐ COMPLETE FASTERM-64 TERMINAL (includes FASTVID-64 video board ASCII-3 keyboard, steel cabinet and power supply) . . . kit $199.95 plus $3 P&I . . . wired & tested $249.95 plus $3 P&I . . . graphics option: add $19.95 to each of above
☐ COMPLETE SMARTERM-80 TERMINAL (includes SMARTVID-80 video board, ASCII-3 keyboard, steel cabinet and power supply) . . . kit $299.95 plus $3 P&I . . . wired and tested $369.95 plus $3 P&I
☐ FASTVID-64 VIDEO BOARD (requires +5 & -12V DC) . . . kit $99.95 plus $3 P&I . . . graphics option add $19.95 . . . wired & tested $129.95 plus $3 P&I . . . graphics option add $19.95
☐ SMARTVID-80 VIDEO BOARD (requires +5 & +/-12V DC) . . . kit $199.95 plus $3 P&I . . . wired & tested $249.95 plus $3 P&I
☐ DELUXE STEEL TERMINAL CABINET . . . $19.95 plus $3 P&I
☐ ASCII-3 KEYBOARD (requires +5 & -12VDC) . . . kit $69.95 plus $3 P&I . . . wired and tested $89.95 plus $3 P&I
☐ POWER SUPPLY (powers ASCII-3 keyboard & video boards) . . . kit only $19.95 plus $2 P&I
☐ ZENITH VIDEO MONITOR (high resolution green phosphor) . . . wired & tested $149.95 plus $6 P&I
☐ TELEPHONE MODEM MODEL 103 O/A . . . wired & tested $189.95 plus $3 P&I
☐ DOT MATRIX PRINTER Comet I . . . wired & tested $299.95 plus $10 P&I
☐ RF MODULATOR MOD RF-1 . . . kit only $8.95 plus $1 P&I
☐ 3FT-25 LEAD MODEM/TERMINAL OR PRINTER/TERMINAL CONNECTOR CABLE . . . $14.95 ea plus $2 P&I

For Canadian orders, double the postage. Conn. res. add sales tax.

Total Enclosed $ _____
☐ Personal Check ☐ Cashier's Check/Money Order
☐ VISA ☐ MasterCard (Bank No. _____)
Acct. No. _____ Exp. Date _____

Signature _____
Print Name _____
Address _____
City _____ State _____ Zip _____

www.americanradiohistory.com

Unclassified Ads

FOR SALE: Ohio Scientific C8P-DF, color video system, keyboard with numeric keypad, 48K RAM, dual 8-inch floppy disks, serial modem port, serial printer port, Centronics printer port, home control port, tone output, DAC output, and two joysticks. Lots of software, including UCSD Pascal. Complete documentation (service manual, technical notes, and more). Also, Okidata ML80 printer and acoustic modem included. $3700 or best offer. Scott Ellsworth, 4260-I Wilmington Dr., Camp Springs, MD 20335. (301) 599-1847.

FOR SALE: Commodore PET 2001 with 8K bytes of memory and internal cooling fan. Lots of documentation, schematics, instruction and learning manuals, programs, games, and miscellaneous hardware. Excellent condition, hardly used (another potential hobby that time didn't permit). $500 or best offer. James Yu, 25 Clarkson Farm Dr., Chesterfield, MO 63017. (314) 227-1094 evenings, 342-2625 days.

FOR SALE: 16K Interact home computer, 1500-bps built-in cassette player, connects to your color TV, complete with Level 2 BASIC and Microchess program tapes, two joysticks, and a service manual. Worth over $800, will sell for $350 or best offer. Apple Tree Press Inc., Attn: Tom Stevens, 120 South Liberty, Rushville, IL 62681. (217) 322-6558 between 1 p.m. and 5 p.m.

WANTED: SwTPC MP-R EPROM programmer, 8, K. Erickson, 304 Southfield Dr., Fayetteville, NY 13066.

FOR SALE: A STD-Bus Z80 system consisting of a Mostek MDX-CPU-II Z80 board, MDX-PIO board, MDX-SIO board, and a Prolog #7702 2716 EPROM card (16K). This is contained in a blue cabinet measuring 14 by 21½ by 12 inches with a key-locking door. The power supply produces −12V,1A; two 5V,5A supplies. The motherboard has 9 sockets with room for 16. Removed from service, less than two years old, and in excellent working order. Documentation included. Makes a great base for CP/M. $500 firm. Billy Garrett, 5515 West Market St., Apt. 801, Greensboro, NC 27409. (919) 852-0323.

WANTED: Norwegian user group is looking for used ZX81's and other compatible equipment. Also, looking for used disk drives and Percom Doubler for TRS-80. Will swap or sell programs for both ZX81 and TRS-80. Ski ZX-group, c/o Jan Otto Reberg, Bjerkelundveien 15, 1400 Ski, Norway.

WANTED: Information for interfacing the Polyphormic system with the Trendata 1000 printer. Any information at all on the Trendata printer would be most helpful. Dr. James F. Calhoun, Dept. of Psychology, Psychology Clinic, University of Georgia, Athens, GA 30602.

FOR SALE: IBM PC components and software: two 5¼-inch disk drives, $200. Game Control Adapter, $45. Peach Tree accounting: General Ledger, Account Receivable, Account Payable, $550. Everything is brand new. T.L. Dawson, 11908 Broad Oaks A, Austin, TX 78759. (512) 258-6117.

WANTED: To correspond with Sinclair ZX81 (16K) users who wish to exchange software and information, or who know of a Sinclair bulletin board system. Steve Ketler, 46225 Strathcona Rd., Chilliwack, British Columbia V2P 3T1, Canada.

FOR TRADE: Want to swap programs for the TRS-80 Color Computer. Send your list of programs and I'll send mine. James L. Payette, Box 250, Echo Bay, Ontario P0S 1C0, Canada.

FOR SALE: TI-743 KSR terminal and Novation Cat modem. Allows telephone direct-connect communications at 300 bps. Terminal has full ASCII keyboard and 80-column thermal printer. Modem is compatible with Bell 103 originans. Rarely used, in excellent shape. Best offer. Randy Miyazaki, 797 Sweetwater Way, San Jose, CA 95133. (408) 738-8330.

FOR SALE: Versafloppy disk controller, S-100 bus-compatible. Operates with single-density, single- or double-sided 5¼- or 8-inch drives; $150. Tank Isani, 601 Alleghany St., Blacksburg, VA 24060. (703) 953-1490.

WANTED: Need information on Digital's PDP-8 and interfacing to a cassette tape player/recorder. Art G. Granzeier III, 2860 B Sabre Dr., Tyndall AFB, FL 32403.

FOR SALE: California Computer Systems 2210A system (4MHz Z80, 64K, DS/DD floppy disk controller, CP/M 2.2), Televideo 920C terminal, two Ourne DT-8 drives in enclosure with power supply and fan. Best offer for any or all. Steve Dirickson, 33 Granite St. #205, New London, CT 06320. (203) 444-7348.

WANTED: Golf-handicap program listing, hints, assistance, etc. Trying to develop a program for my Osborne 1 and my golf association. Loren Martindale, 1746 West 25th Lane, Yuma, AZ 85364.

FOR SALE: Rockwell System 65 Microcomputer Development System, 32K RAM, 1 MHz. Includes 16K static RAM module, PROM programming module, OS2 and OS3 operating systems with 6502 assembler, editor, diagnostic, and debug/monitor packages, plus User 65 host and buffer modules for in-circuit emulation. All documentation, factory serviced, and ready to go. Cost $8840, new in 9/81. Yours for $3000 firm. Dennis Neff, 26712 Calle Maria, Mission Viejo, CA 92691. (714) 855-9585.

WANTED: High school student needs used or surplus computer equipment. Can use anything from tapes and disks to drives and monitors. Nels Bruckner, 36823 Jasper-Lowell Rd., Jasper, OR 97401.

WANTED: Information on IMSAI 8080 kit. My kit is incomplete, I am a beginner computer hobbyist and would like to finish the kit. Any help would be appreciated. Also, some issues of Kilobaud Microcomputing for sale. J. Richard Laredo, 3211 West Rohmann Ave., Peoria, IL 61604. (309) 673-7854.

WANTED: Engineering student would like to purchase a 10-MHz, or better, oscilloscope; M68000 single-board computer; PCB manufacturing equipment; databooks and manuals. If you have (but are not using) any of this equipment, make me an offer. Tim Nye, 443 Simcoe St., Amherstburg, Ontario N9V 1N4 Canada.

FOR SALE: Heath H-19A video terminal assembled and tested. Complete documentation and schematics. Priced much lower than Zenith Z-19 yet completely compatible. Suitable for use with any RS-232C modem or computer with serial output. Hugh Henriques, 2416 Vails Gate Heights Dr., New Windsor, NY 12550. (914) 565-3926.

FOR SALE: O-bus backplanes. H9270 (4 by 4), H9281-8B (2 by 8), and H9281-8C (2 by 12). Would like $100 each, but will consider all offers. Bob Gordon, POB 394, Burlington, VT 05402. (802) 985-2911.

FOR SALE: Apple Integer BASIC firmware ROM card. This card has the old monitor ROM which contains instruction trace, single-step facilities, and 16-bit multiply-and-divide instructions; $100. Mark L. Engel, 345 Black Rock Ave., New Britain, CT 06052. (203) 229-0077.

FOR SALE: Sinclair ZX81 with 16K, manual, cassette cord, power cord, and TV connector; $150 value, first $125 takes all. J. Mcmanus, 102 Brookside Rd., Darien, CT 06820. (203) 655-6568.

FOR SALE: S-100 boards: 8K Godbout Econoram II static-memory board, 8K Logos I static-memory board. Both assembled and in excellent condition; $60 each. Stanley Lee, 164 Fallswater Road NE, Calgary, Alberta T3J 1B3, Canada. (403) 259-8440.

FOR SALE: Centronics Micro printer with four extra rolls of paper; $150. Intel SDK-85 System Design Kit; $100. Vector rack-mount card cage with Compupro 6-slot motherboard; $100. CCS Floating Point Math Card for Apple; $200. Keith Sharman, 42 Rossmere Close SE, Medicine Hat, Alberta T1B 2J8 Canada. (403) 526-0594.

WANTED: A small to medium computer system for nonprofit educational organization. Needed for fund raising and bookkeeping. Any donation would be fully tax deductible. Will consider anything. Mike Robinson, Kansas City Capital, Route #1, Waverly, MO 64096. (816) 493-2285.

WANTED: Someone to program (burn) Signetics Prom #8251 15. I can supply chip plus program on 5V-2716 or paper tape. Sid Tallman, University of Miami, Tritium Lab, 4600 Rickenbacker Causeway, Miami, FL 33149.

FOR SALE: BYTE, first issue to present, 13 volumes bound in blue buckram; 1982 issues unbound; $300 or best offer. Kilobaud Microcomputing, first issue to present, 10 volumes bound in brown buckram; 1982 issues unbound; $275 or best offer. Possible trade for Apple hardware. A. Osroff, 6774 Sunny Brae Dr., San Diego, CA 92119. (714) 461-6573.

FOR SALE: Commodore PET 2001 series with 8K RAM, Bets-i interface board, 24K Expandoram memory board, Kimsi-Plus power supply, and a cassette with several programs including Space Invaders, Checkers 3.0, and Dunjonquest—Temple of Apshai. Best offer over $500. Donald Burden, Rt. 3, Box 219, Floyds Knobs, IN 47119.

FOR SALE: Netronics Elf II with kluge board, 4K RAM board, three 86-pin gold-edge connectors, tiny BASIC on cassette, full BASIC in EPROM, and Giant board. Also, Netronics ASC II encoded keyboard, video-display board, and RF modulator. Also, Emerson cassette recorder and homebrew power supply. Full documentation included. Complete operating system in excellent condition. $350 or best offer. Will sell separately. John Mills, 52 Audubon St., New Britain, CT 06053. (203) 229-3370.

FOR SALE: Apple package: 48K Apple II Plus, two disk drives, 16K Apple language card, Hayes Micromodem II, Mountain CPS serial/parallel card with clock, and four boxes of disks. Software: BASIC, Pascal, Visicalc, Visiterm, DOS 3.3, DOS toolkit, Peachtree Accounting System for CP/M (A/R, A/P, G/L, Payroll), all manuals included. Plus, a free used Dataproducts matrix printer not hooked into system yet, but works. Complete package: FOB $3800. Art Manzo, 1130 Hopkins Ave., Redwood City, CA 94062. (415) 367-8833.

WANTED: Replacement keyboard for Commodore PET Model 2001. Symbols have worn off the old calculator-style keys. Mark Zimmermann, 219 Dale Dr., Silver Spring, MD 20910. (301) 565-2166.

WANTED: Need any DECtape controller (preferably for PDP-9/15) DEC M boards, etc. for PDP-15. Will trade DEC A, B, G, R, W series boards, empty DEC racks, power supplies, etc. Also for trade or sale one new DL11W I/O port for PDP-11s. Looking for other users of DEC machines, we have running PDP-7, 8, 9, 15, and people scrapping their antique DEC equipment. Dave Razler, 33A Clubhouse Rd., Storrs, CT 06268. (203) 429-0054.

FOR EXCHANGE: Want computer equipment: printers, displays, hard-disk systems, software, etc. in exchange for oak furniture. Vern Blanchard, POB 445, Ramona, CA 92065. (714) 789-6149.

UNCLASSIFIED POLICY: Readers who have computer equipment to buy, sell, or trade or who are requesting or giving advice may send a notice to BYTE for inclusion in the Unclassified Ads section. To be considered for publication, an advertisement must be noncommercial (individuals or bona fide computer clubs only), typed double-spaced on plain white paper, contain 75 words or fewer, and include complete name and address. This service is free of charge; notices are printed once only as space permits. Your confirmation of placement is appearance in an issue of BYTE as we engage in no correspondence. Please allow at least three months for your ad to appear. Send your notices to Unclassified Ads, BYTE/McGraw-Hill, POB 372, Hancock, NH 03449.

www.americanradiohistory.com

Unclassified Ads

FOR SALE: Storage Oscilloscope. Tektronix Model 7834 with 7A19, 7A26, 7B80, 7B85, 7D15, as well as Solder/Desolder PPS 100A by Page. Sean Hegna or Ann Thagard, 235 East Bayfront, Balboa Island, Newport Beach, CA 92662. (714) 673-3383.

FOR SALE: Persci 277 dual-disk drive. Fastest 8-inch floppy-disk drive on the market. Functions as two conventional drives. 1.8-ms track-to-track seek time. Voice-coil servo positioner: $400. Robert Morein, 1570 Arran Way, Dresher, PA 19025. (215) 628-8684.

FOR SALE: Two Percom data separators: $20 each. Cashier's check or postal money order. Construction Engineering Inc., 125 Irving St., POB 2154, Framingham, MA 01701.

NEEDED: Someone to modify Radio Shack's Mailing List II program for use with extra disk drives. Joe Flores, 4247 North Arica Ave., Rosemead, CA 91770. (213) 287-2195.

FOR SALE: Datel 30 printer: IBM Selectric mechanism, serial input, needs work. $300 or best offer. Jeff Spirer, 3530 Henry Hudson Parkway, Bronx, NY 10463. (212) 796-6060, 10 a.m. to 3 p.m.

WANTED: Protocol Converter. I need to communicate with IBM 2780 bisynchronous protocol through an asynchronous RS-232C serial port. I need a Black Box Catalog A/S-2 protocol converter or equivalent. Jim Hutchins, 3713 Forest Lane, Garland, TX 75042. (214) 272-5431

FOR SALE: DECwriter II Model LA 36: Complete with Omnitec modem. Not currently in use. Best offer. Peter B. Roll, (516) 671-5100.

WANTED: Correspondence from anyone who has had experience using the Phasestore 5075 system, manufactured by California Micro Computer Company, in conjunction with an IBM 50, 60, or 75 electronic typewriter. W.J. Buchanan, 11421 Key West Dr. NE, Albuquerque, NM 87111.

FOR SALE: Digital Group Z80 with 62K, 256 by 256 graphics board (8K), audio-cassette board, eight parallel ports, and four RS-232C serial ports. Quad Phi-Deck drive with controller, disk-drive controller board (no drives), real-time clock/interrupt board, P.A. printer, full ASCII keyboard, and Sanyo 9-inch monitor. Also, Oasis 5.3, Phimon, Image, and more. $2000 or best offer. Tommy S. Davis, Rt. 1 Box 61, Driggs, ID 83422. (307) 353-2578.

FOR SALE: IBM Selectric I/O terminal and ball in working condition: $275 (needs character adjustment). Oscilloscopes, Hewlett-Packard dual trace: $250. Tektronix, dual- and quad-trace, dual-writing beam: $295. DEC 11/05 cabinet with power supply, sockets, and fans as supplied by DEC: $295. Televideo Model 912, like new: $495. Core memory system in cabinet made by Fabritek for DEC PDP-11 computers: make an offer. Microfiche reader manufactured by Recordak: $85. Also, have many DEC module boards. Murray Marcus, 918 Rockmont Court, Orlando, FL 32804. (305) 299-4229.

FOR SALE: Ohio Scientific Challenger 4 personal minicomputer with OSI65D operating system, 32K processor memory, two 5¼-inch disk drives, and a Microline 80-cps dot-matrix printer; includes 20 disks, software, and games: $200 or best offer. Also have #33 Teletypewriter: $200 or best offer. Stella Ellis, POB 233, Westchester, IL 60153. (312) 345-2770.

WANTED: Programming job to work on at home. I am an electrical engineer with 3 years' experience in micro software, 2½ years in micro hardware, and 2½ years in other digital hardware. I have a Sphere and TRS-80 Model I with disk, but am willing to buy more equipment (like an IBM PC) if needed. Charles Skeldon, 5119 Irving Ave. N, Minneapolis, MN 55430. (612) 588-9088, after 6 p.m.

WANTED: Exchange sailboat design: theory and navigation programs in BASIC or Pascal. Brent Farler, 10810 East 33rd Court, Tulsa, OK 74145.

WANTED: Individual who uses computers for stock market investment decisions would like contact with any user clubs in the Louisville, Kentucky area. Also, with individuals using computer-assisted forecasting for any market. This includes subscribers to The Granville Market Letter, The Professional Investor, and other financial advisories. W.C. Gaines, 1814 Lafontenay Court, Louisville, KY 40223. (502) 244-0756.

FOR SALE: Teletype Model 43 printing terminal with a Multitech acoustic modem: $800. Brian Keller, 1801 Pomme Rd., Arnold, MO 63010. (314) 296-6230.

FOR SALE: SwTPC 4K Memory Boards, $35 each or all five for $150. Would consider trade for Percom LFD Disk Controller, with Smoketran and complete documentation. Richard Carreras, (505) 298-9187.

FOR SALE: ASR-33 Teletype. Distributor checked. Good condition. Used in bug book experiments as typewriter printer/paper punch. ASR manual included: $175. Pay shipping on delivery. G. Pilant, 1332 Mass., Joplin, MO 64801. (417) 623-9991

BOMB

BYTE's Ongoing Monitor Box

Article #	Page	Article	Author(s)
1	26	Build the ECM-103, an Originate/Answer Modem	Ciarcia
2	34	The Enhanced VIC-20, Part 2: Adding a 3K-Byte Memory Board	Swank
3	44	A User's View of COMDEX	Pournelle
4	56	The Promise of Perpendicular Magnetic Recording	Johnson
5	68	New Developments in Floppy Disks	Moran
6	86	Optical-Memory Media	Rothchild
7	110	Will Removable Hard Disks Replace the Floppy?	Sarisky
8	122	The Winchester Odyssey, From Manufacturer to User	Toreson
9	130	Building a Hard-Disk Interface for an S-100 Bus System, Part 1: Introduction	Cruce, Alexander
10	152	NAPLPS: A New Standard for Text and Graphics, Part 2: Basic Features	Fleming
11	190	MP/M II	Schmitt
12	218	User's Column: Sage in Bloom, Zeke II, CBIOS Traps, Language Debate Continues	Pournelle
13	247	Project Nebula	Carlson
14	248	Legionnaire	Williams
15	251	Omega Race for the VIC-20	Wszola
16	256	Quickcode	Green
17	262	A Faster Binary Search	Larson
18	282	Hayes's Stack Smartmodem	McEntire
19	295	Data Collection with a Microcomputer	Kelly
20	310	Build This Memory, Part 1: How to Construct a Low-Cost Memory with 4116 Memory Devices	Spitzer
21	331	A Peek into the IBM PC	Field
22	389	Keywords in a Fuzzy Context	Smith
23	418	ROTERP: An Interpretive Language for Robot Control	Liming
24	436	Using SOUND Arguments for High-Precision RTTY	Persson
25	453	Binary-Format Number Storage on the Apple II Disk	Eyes

Part 2 Is Number 1

Steve Ciarcia won the December BOMB contest with the second part of "Build the Circuit Cellar MPX-16 Computer System." He will receive the $100 kitty. Second place goes to Jerry Pournelle for his User's Column "A Slew of Languages, a Slap at Documentation, and a Curse at Keyboards." This honor brings with it a $50 purse. Chris Crawford won third place for sharing his experience in game design in the article "Design Techniques and Ideals for Computer Games."

www.americanradiohistory.com

Reader Service

Inquiry No.	Page No.
118	1st NATIONAL COMP. 228, 229
2	800 SOFTWARE 157
3	A.S.T.RESEARCH 240, 241
4	AB COMPUTERS 523
5	ABACUS DATA INC. 231
482	ACTION COMPUTER 290
6	ACTIVE ELECTRONICS 382
7	ADDMASTER CORP. 522
8	ADV.COMP.PROD. 538, 539
*	ADV.DIGITAL CORP. 81
149	ADV.LOGIC SYSTEMS 181
10	ADV.SYS.CONCEPTS 514
12	ADVANCED COMP.TECH. 526
*	ALF PRODUCTS, INC. 88
13	ALL ELECTRONICS CORP. 508
14	ALPHA BYTE COMP.PROD. 54, 55
15	ALPHA BYTE COMP.PROD. 315
17	ALSPA COMP.SYS. 373
18	ALTOS COMP.SYS. 188, 189
19	AMANUENSIS 202
20	AMDEK CORP. 59
21	AMER.SMALL BUSN.COMP. 473
22	AMER.SQUARE COMP. 158
493	ANATRON 354, 355
23	ANUDATA 526
25	APPARAT INC. 167
26	APPLE COMPUTER INC. 168, 169
28	APPLEWARE, INC. 516
29	APPLIED ANALYTICS 246
*	APPLIED CREATIVE TECH.INC. 22
30	APPLIED SOFTWARE TECH. 131
31	ARBA 350
474	ARCHIVES INC. 471
32	ARTIFICIAL INT'L.RESRCH. 514
33	ASHTON-TATE 208, 209
34	ASPEN SFTW.CO. 78
*	AT & T LONG LINES 388
35	ATLANTIC CABINET CORP. 514
36	ATLANTIS COMP.SERV. 512
37	ATSUKO COMPUTING INT'L. 526
38	AUTOCONTROL INC. 526
39	AUTOMATED EQUPMNT. 401
40	AVOCET 347
41	AXLON 61
42	AXLON 257
43	B&B ELECTR. 522
*	BARGAIN BOARDS 524
44	BASF SYSTEMS 153
45	BAUSCH & LOMB INSTR.SYS. 199
46	BAUSCH & LOMB INSTR.SYS. 199
47	BAY TECHNICAL ASSOC. 308
125	BEAR COMP. 458
48	BELL, JOHN ENGR. 509
49	BELLE DE ST.CLAIRE 481
50	BHRT 227
506	BHRT 424
51	BI-COMM SYSTEM 475
53	BISON PROD INC. 294
54	BISON PROD INC. 294
58	BLAT RESRCH. & DEVELOP. 481
59	BMC SYSTEMS, INC. 125
60	BOTTOM LINE, THE 197
52	BRS 105
62	BT ENTERPRISES 518
63	BUSINESS MANAGER 253
*	BYTE BACK ISSUES 473
*	BYTE BOOK CLUB 416, 417
*	BYTE BOOKS 205
64	BYTE INDUSTRIES 471
*	BYTE PUBL.INC. 458
65	BYTEK COMP.SYS. 384
66	BYTEWRITER 58
67	C-SYSTEMS 526
68	CAB-TEK, INC. 480
69	CALIF. DATA CORP. 512
*	CALIF. DIGITAL 540, 541
*	CALIF.MICRO.COMP. 469
71	CAVERLY'S INC. 522
72	CCM INC. 522
73	CDEX CORP. 171
74	CDR SYSTEMS 518
75	CENTENNIAL SOFTWARE 132
76	CHECK-MATE 476
77	CHECKS-TO-GO 144
78	CHIPS & DALE 526
79	CHRISLIN INDUSTRIES 521
80	CLAFF, WILLIAM J. 524
81	COGITATE 512
483	COLORADO CHIPS 508
494	COLORADO COMP.PERIPH. 459
82	COLUMBIA DATA PROD. 225
83	COLUMBIA NATIONAL 176
84	COMMUNICAL, INC. 244
85	COMMUNICATION CABLE 528
86	COMMUNICATIONS ELECTR. 525
365	COMPATIBLE/QT 306
500	COMPAQ 191
138	COMP. ENTREPRENEUR 245
87	COMP.COMPNTS.UNLTD. 519
88	COMPONENTS EXPRESS 475
89	COMPUADD 514
90	COMPUADD 514
91	COMPUCART 223
92	COMPUPRO/GODBOUT 200, 201
*	COMPUPRO/GODBOUT 338, 339
93	COMPUPRO/GODBOUT 444, 445
94	COMPUSERVE 280, 281
358	COMPUSHACK 285
360	COMPUSHACK 364, 365
95	COMPUTER APPARATUS 530
96	COMPUTER CHANNEL 529
97	COMPUTER DISCOUNT PROD. 527
470	COMPUTER EXCHANGE 108, 109
471	COMPUTER EXCHANGE 108, 109
472	COMPUTER EXCHANGE 108, 109
101	COMPUTER HORIZON 524
102	COMPUTER INNOVATIONS 72
103	COMPUTER LEARNING TREE 220
104	COMPUTER MAIL ORDER 398, 399
105	COMPUTER PERIPH.INC. 69
106	COMPUTER PERIPH.INC. 237
107	COMPUTER PLUS 482
11	COMPUTER PUBLISHING CO. 174
108	COMPUTER SOLUTIONS 309
109	COMPUTER SPCLTIES. 149
*	COMPUTER WAREHOUSE 259
110	COMPUTERLINE INT'L-A 325
111	COMPUTERLINE INT'L-A 378, 379
112	COMPUTERLINE INT'L-B 506
113	COMPUTERS & MORE 524
114	COMPUTERS WHOLESALE 139
115	COMPUVIEW PROD.INC. 63
116	CONCORD COMP.PROD. 530
117	CONCURRENT CORP. 62
*	CONNECTICUT MICRO COMP. 430
120	CONTINUUM 160
121	CONTROL C SOFTWARE 104
122	COST PLUS COMP. 522
*	COUGAR MT. SOFTWARE 234
124	CPU SHOP, THE 515
126	CREATIVITY UNLTD. 489
127	CROMEMCO CII, 1
128	CROMEMCO 2
130	CSCS 508
503	C.S.D. INC. 242
131	CUESTA SYSTEMS 516
132	CUSTOM COMP.TECH. 124
*	CYBERNETICS INC. 289
134	D.C.POSTAGE 528
135	DAMAN 528
137	DATA EXCHANGE 512
217	DATA MAIL 333
138	DATA MANAGEMENT SYS. 518
497	DATA MASTER 459
139	DATA SOURCE SYS.CORP. 283
140	DATASOUTH COMP.CORP. 335
141	DATASOUTH COMP.CORP. 420
142	DECISION RESOURCES 383
143	DESIGNWARE INC. 489
144	DIGISOFT 187
341	DIGISOFT COMP. 414
145	DIGITAL DIMENSIONS 446
146	DIGITAL MARKETING 6
148	DIGITAL RESEARCH 33
149	DIGITAL RESEARCH 181
150	DIGITAL RESEARCH 343
*	DIGITAL RESEARCH COMP. 517
152	DISCOUNT SOFTWARE 155
*	DMA 411
154	DOKAY COMP.PROD.INC. 534, 535
*	DOW JONES SFTW. 177, 178, 179
157	DUAL SYS.CONTROL CORP. 211
158	DYNACOMP 518
159	DYSAN CORP. 9
160	DYSAN CORP. 344, 345
244	EASTERN ENTERPRISES 475
162	ECONOMY PERIPHERALS 516
163	ECOSOFT 469
164	EDGE MICROSYSTEMS 514
165	EDMUND SCIENTIFIC CO. 477
169	ELECTRONIC CONTROL 462
172	ELLIS COMPUTING 147
173	EMERGING TECH.CONSLT. 488
*	EMPIRICAL RESRCH.GRP. 154
166	EMS 510
167	EMS 520
175	ENERCOMP 436
176	ENGINEERING SPECIALTIES 148
177	EPSON AMERICA 99
178	EPSON AMERICA 408, 409
179	ESSEX PUBLISHING 479
180	EXPOTEK 222
181	EXTENDED PROCESSING 508
486	FACIT/DATA ROYAL 15
182	FORMULA INT'L. 349
183	FOX & GELLER INC. 375
184	FRANKLIN COMP.CORP. 367
430	FROBCO 522
185	G-H COMPUTER SYS. 512
186	GARDEN OF EDEN COMP. 508
187	GENERAL SOFTWARE INC. 212
188	GENIE COMP.CORP. 336, 337
189	GIFFORD COMP. SYS. 203
189	G&G ENGINEERING 203
192	GILTRONIX INC. 520
193	GTCO CORP. 137
194	GTEK INC. 286
195	HANDWELL CORP. 516
196	HAYES MICROCOMP.PROD. 46, 47
198	HAZELTINE CORP. 341
119	HEATH COMPANY 304, 305
200	HEWLETT-PACKARD 84, 85
478	HOBB-Y-TRONIX INC. 529
201	HOFFMAN COMP. PROD. 510
202	HUMAN DESIGN SYSTEM 87
484	I.B.C. 19
485	I.B.C. 19
498	I.C.E. CORP. 459
204	I.T.M. 432
205	IBM CORP. 120, 121
206	IDE CORPORATION 433
207	IMS INTERNATIONAL 123
208	INCOMM 414
504	INFORMATION REDUCTION RESEARCH 496
210	INFOSCRIBE 76
221	INNOVATIVE COMM. 520
501	INNOVATIVE RESEARCH 242
211	INSIGHT ENTERPRISES 510
212	INSTITUTE-SCTF.ANALYSIS 514
213	INT'L.MICRO SYS. 363
214	INT'L.MICRO SYS. 421
215	INTEGRAL DATA SYS. 279
216	INTEGRAND 412
218	INTELLIGENT ARTEFACTS 333
219	INTERACTIVE MICROWRE. 384
220	INTERACTIVE STRUCT. 79
222	INTERCONTN.MICROSYS. 313
223	INTERDATA SYSTEMS INC. 524
224	INTERTEC DATA SYS. 11
225	IPEX INT'L. 524
226	IRONSIDES COMP. CORP. 133
227	ISA CO.LTD. 162
228	J.C.SYSTEMS 20
229	JADE COMP.PROD. 531
230	JADE COMP.PROD. 532, 533
231	JAMECO ELECTR. 542, 543
232	JDR MICRODEVICES 550, 551
233	JDR MICRODEVICES 552, 553
234	JRT SYSTEMS 319
236	JVB ELECTRONICS 516
237	K & D ELECTRONICS 520
238	KERN PUBLISHING 243
239	KEY TRONICS CORP. 35
240	KRELL SOFTWARE 404
241	LABORATORY MICROSYS. 510
242	LANIER BUSN.PROD. 460, 461
243	LEADING EDGE PROD. CIII
245	LEHMANN & ASSOC. 524
246	LIGO RESEARCH INC. 173
247	LOGIC PROGRAMMING ASSOC. 516
248	LOGICAL DEVICES 380
249	LOGICAL MICROCOMPUTER 303
487	LOGO COMP.SYS. 73
250	LOMAS DATA PRODUCTS 405
491	LOTUS DEVELOPMENT 266, 267
251	LYBEN COMP.SYS. 528
252	LYCO COMPUTER 431
*	MACMILLAN BOOK CLUBS 353
253	MACROTECH INT'L. 235
254	MAILCOMP INC. 427
256	MANNESMANN TALLY 165
*	MARTIN MARIETTA CORP. 428
259	MARYMAC INDUSTRIES 264
260	MAXELL DATA PRODUCTS 135
168	MBI 528
*	McGRAW-HILL/BYTE BOOK CO. 469
261	MEDIA DISTRIBUTING 300
262	MEDIA DISTRIBUTING 301
263	MEGA CO. 472
264	MEMORY MERCHANT 239
265	METAMORPHIC SYS.INC. 17
268	METASOFT CORP 422
267	MFJ ENTERPRISES INC. 415
269	MICRO AGE COMP.STORE 221
270	MICRO BUSN.WORLD 270
271	MICRO LOGIC 518
273	MICRO MANAGEMENT SYS. 443
277	MICRO MART 472
274	MICRO MIDWEST 514
275	MICRO MINT 371
481	MICRO MINT 549
502	MICRO MINT 242
276	MICRO SCI 18
278	MICRO WORKS, THE 271
268	MICROADE 528
279	MICROCOMP.BUSN.IND. 254, 255
281	MICRODYNAMICS 520
282	MICROHOUSE 12, 13
283	MICROPERIPH.CORP, THE 522
284	MICROPROCESSORS UNLTD. 528
*	MICROSOFT 117
*	MICROSOFT 232, 233
287	MICROTECH EXPORTS 406
288	MICROWARE 510
289	MINI MICRO MART 381
290	MK RESEARCH 512
292	MONITOR DYNAMICS 512
255	MONUMENT COMP.SERV. 236
*	MOORE BUSN.FORMS 226
295	MORROW DESIGNS 83
296	MORROW DESIGNS 434, 435
297	MOUNTAIN VIEW PRESS 403
299	MULLEN COMP. PROD. 111
300	MUSYS 477
301	NABU COMMERCIAL TERMINALS 219
302	NEBS 284
303	NEC HOME ELECTR.USA 159
304	NEC HOME ELECTR. USA 161
305	NEC HOME ELECTR. USA 163
309	NEC INFORMATION SYS. 112, 113, 114, 115
310	NEC INFORMATION SYS. 351
*	NETRONICS 558
311	NETWORK CONSULTING CORP. 102
312	NEW GENERATION SYS. 182
492	NEW MEDIA GRAPHICS 516
136	N.K. INC 489
313	NON-LINEAR SYS. INC. 92
314	NORTH HILLS CORP. 510
315	NORTH HILLS CORP. 518
316	NORTHWEST MICROSYS. DESGN. 522
317	NOVATION 466
318	NOVATION 467
319	NOVELL DATA SYS. 57
*	NRI SCHOOLS ELECTR. DIV. 385
320	OASIS SYSTEMS 66, 67
321	OMEGA MICROWARE INC. 291
322	ORANGE MICRO 140
323	ORANGE MICRO 141
325	ORGANIZATIONAL MANAGEMENT SYS. 510
326	ORTHOCODE GROUP 214
327	ORYX SOFTWARE 413
*	OSBORNE COMPUTERS 145
329	OSM COMPUTER 23
*	OWENS ASSOC. 426
330	P.R.I.C.E. 510
331	PACIFIC EXCHANGES 508, 512, 516, 520, 524, 526
337	PALOMAR COMP.EQUIP. 386, 387
338	PAN AMERICAN ELEC. INC. 482
339	PANASONIC H.H.C. 150, 151
340	PARTRAN CO., THE 528
342	PERCOM DATA 7
343	PERIPHERAL MARKETING INC. 518
344	PERSONAL COMP.SYS. 299
345	PERSONAL SYS.TECHN. 143
346	PHASER 65
347	PICKLES & TROUT 156
498	PION INC. 317
348	PLUS & PLUS CO, LTD. 258
349	POPCOM 261
350	PRACTICAL PERIPH. 24, 25
351	PRAGMATIC DESIGNS 128
352	PRINCETON GRAPHIC SYS. 37
354	PRIORITY ONE 544, 545
355	PRIORITY ONE 546, 547
358	PRIORITY ONE 548
361	PROGRAMMERS SFTW. EX. 288
363	PURCHASING AGENT, THE 94
364	QANTEX DIV. 91
365	QT/COMPATIBLE 306
366	QUADRAM CORP. 216, 217
367	QUADRAM CORP. 423
368	QUARK ENGINEERING 265
369	QUASAR COMPANY 89
461	QUBIE DIST 95
462	QUBIE DIST 185
370	QUME CORP. 96, 97
372	RACET COMPUTES LTD. 471
373	RADIO SHACK CIV
374	RANA SYSTEMS 42, 43
375	RCA 361
376	RCS INC. 488
324	RED BARON 292, 293
377	RED GATE PUBL.CO. 90
378	RIXON 324
379	ROLAND CORP. 101

To get further information on the products advertised in BYTE, fill out the reader service card with your name and address. Then circle the appropriate numbers for the advertisers you select from the list. Add a 20-cent stamp to the card, then drop it in the mail. Not only do you gain information, but our advertisers are encouraged to use the marketplace provided by BYTE. This helps us bring you a bigger BYTE. The index is provided as an additional service by the publisher, who assumes no liability for errors or omissions. *Correspond directly with company.

www.americanradiohistory.com

Reader Service

Inquiry No.	Page No.
410	RTL PROGRAMMING AIDS 508
381	S&W COMPUTER SUPPLY 472
382	S-100 INC. 274
383	SAGE COMP.TECH. 287
488	SATURN SYSTEMS 129
384	SCIENTIFIC ENG. 520
476	SCION CORP 5
477	SCION CORP 5
*	SCOTTSDALE SYSTEMS 377
386	SEARS GROUP, THE 524
388	SEIKOSHA CORP. 107
389	SIERRA DATA SCIENCES 39
390	SIERRA DATA SCIENCES 402
391	SIGEN CORP. 260
392	SIGMATEK 520
393	SILVER-REED AMERICA, INC. 136
*	SINCLAIR RESEARCH 419
394	SLR 508
395	SLUDER 480
396	SOFTCORP INT'L. 186
235	SOFTWARE ASSOC. 238
397	SOFTWARE BANC 359
398	SOFTWARE PUBLISHERS 528
399	SOFTWARE TECHNIQUE 510
400	SONICS MICRO SYS. 75
473	STANDARD SOFTWARE 312
401	STAR COMPUTER 207
*	STAR LOGIC 442
499	STAR MICRONICS 369
403	STEMMOS LTD. 198
404	STREET ELECTR. CORP. 48
405	STSC INC. 407
406	SUNTRONICS 536, 537
407	SUPERSOFT 195
408	SYNCOM SYSTEMS 52
409	SYQUEST TECH. 119
380	SYSTEMED 512
411	SYSTEMS STRATEGIES 260
412	TAB BOOKS 465
413	TALLGRASS TECH. 82
414	TARBELL ELECTR. 486
415	TATUM LABS 447
357	TAVA CORP 269
359	TAVA CORP 330
416	TAYCO BUSINESS FORMS 518
417	TDK ELECTRONICS 175
419	TECH-DATA CORP. 526
420	TECMAR INC. 263
*	TEKTRONIX INC. 71
421	TELECON SYSTEMS 40
422	TELETEK 51
423	TERMINALS TERRIFIC 450
*	TEXAS COMP.SYS. 437
425	TEXAS INSTRUMENTS 183
*	TEXAS INSTRUMENTS 272, 273
426	TEXPRINT 516
387	TIMESAVER SYS. 526
427	TIMESHARING DEV. INC. 410
479	TINNEY, RBT GRAPHICS 213
480	TINNEY, RBT GRAPHICS 252
428	TOSHIBA AMERICA INC. 429
495	TOPAZ 93
429	TOTAL ACCESS 425
153	TRAKSTOR 513
489	TRILOG 448
490	TRILOG 449
432	TRISOFT 358
433	TRISTAR DATA SYS. 400
435	TSK ELECTR.CORP. 77
436	TYCOMP COMPANY 447
437	U.S. MICRO SALES 554, 555
438	U.S. ROBOTICS 118
439	U.S. EXCHANGE 514
440	ULTRA MAGNETICS TECHN. 215
441	UNITED SFTW.CO. 103
442	VECTRIX 41
443	VIDEX 21
444	VINTAGE BOOKS 473
445	VISUAL TECH,INC. 127
446	VOTRAX 277
449	WADSWORTH ELECT.PUBL. 275
450	WASHINGTON COMP.SERV. 236
451	WASHINGTON COMP.SERV. 511
452	WE SOFTWARE 518
453	WESPER MICROSYSTEMS 479
*	WESTICO INC. 49
454	WESTWARE 357
455	WESTWARE 357
456	WHITESMITHS LTD 50
457	WIN/MILL RESEARCH INC. 508
458	WINTEK CORP. 520
459	WINTERHALTER & ASSOC. 477
460	WORDTECH SYSTEMS 64
464	WW COMPONENT SUPPLY 441
465	WYSE TECHNOLOGY 193
466	X COMP 329
467	YANG ELECTRONIC 522
*	ZILOG COMP. SYS. 53

*Correspond directly with company.

National Advertising Sales Representatives:

Northeast
ME, NH, VT, MA, CT, RI, DE, MD, VA, WV, OK, TX, Upstate NY, Eastern Canada

Hajar Associates
280 Hillside Ave.
Needham Heights, MA 02194
(617) 444-3946

Mid Atlantic
NY, NYC, NJ, PA

Hajar Associates
321 Broad St.
Red Bank, NJ 07701
(201) 741-7744

Southeast
NC, SC, GA, FL, AL, MS, TN, KY, LA

Maggie McClelland
McGraw-Hill Publication
4170 Ashford Dunwoody Road
Suite 420
Atlanta, GA 30319
(404) 252-0626

Midwest
MN, WI, MI, IA, IL, IN, OH, MO, NE, KS, ND, SD, AR

Hajar Associates
5225 Old Orchard Rd.
Suite 50
Skokie, IL 60076
(312) 966-0160

Northwest
AK, HI, WA, OR, ID, MT, WY, Northern California, Nevada Except Las Vegas, Western Canada

Bill McAfee
McGraw-Hill Publications
1000 Elwell Court
Suite 124
Palo Alto, CA 94303
(415) 968-0280

Southwest
UT, CO, AZ, NM, Las Vegas, Southern California

Page Goodrich
McGraw-Hill Publications
3001 Red Hill Avenue
Building #1-Suite 222
Costa Mesa, CA 92626
(714) 557-6292

Karen Niles
McGraw-Hill Publications
3200 Wilshire Boulevard
Los Angeles, CA 90010
(213) 480-5243
(213) 487-1160

West Coast Surplus and Retail Accounts
Tom Harvey
3463 State Street
Suite 256
Santa Barbara, CA 93105
(805) 964-8577

European Advertising Sales Representatives:

Mrs. Maria Sarmiento
Pedro Teixeira 8, Off. 320
Iberia Mart 1
Madrid 4, Spain
45 52 891

Mr. Andrew Karnig
Andrew Karnig & Associates
Kungsholmsgatan 10
112 27 Stockholm, Sweden
08 51 68 70

Mr. Hans Csokor
Publimedia
Reisnerstrasse 61
A-1037 Vienna, Austria

Mrs. Gurit Gepner
McGraw-Hill Publishing Co.
115 Yosephtal St.
Bat Yam, Israel
866 561 321 39

Mr. Fritz Krusebecker
McGraw-Hill Publishing Co.
Liebigstrasse 27C
D-6000 Frankfurt/Main 1
West Germany
72 01 81

Mr. Michael Sales
McGraw-Hill Publishing Co.
17 rue Georges Bizet
F 75116 Paris
France
720 33 42

Mr. Simon Smith
McGraw-Hill Publishing Co.
34 Dover St.
London W1X 3RA
England
01 493 1451

Mr. Elio Gonzaga
McGraw-Hill Publishing Co.
Via Baracchini 1
20123 Milan, Italy
86 90 617

Far East/Pacific
Seavex Ltd.
05-49/50 Tanglin Shopping Center
19 Tanglin Rd. Singapore 1024
Republic of Singapore

Seavex, Ltd.
Room 102, Yu Yuet Lai Bldg.
43-55 Wyndham St. Central
Hong Kong

www.americanradiohistory.com

BYTE READER SERVICE

For fastest service transfer mailer label from wrapper to coupon provided at the right. Requests cannot be honored unless zip code is given. This card valid for 90 days only. **NOTE**—If label is missing or defaced fill out coupon carefully—**PLEASE PRINT**—this is the only way to get requested material to you.

Name _____

(Title) _____ (Company) _____

Address _____

City _____ State _____

1	21	41	61	81	101	121	141	161	181	201	221	241	261	281	301	321	341	361	381	401	421	441	461	481	501	521	541	561	581	601
2	22	42	62	82	102	122	142	162	182	202	222	242	262	282	302	322	342	362	382	402	422	442	462	482	502	522	542	562	582	602
3	23	43	63	83	103	123	143	163	183	203	223	243	263	283	303	323	343	363	383	403	423	443	463	483	503	523	543	563	583	603
4	24	44	64	84	104	124	144	164	184	204	224	244	264	284	304	324	344	364	384	404	424	444	464	484	504	524	544	564	584	604
5	25	45	65	85	105	125	145	165	185	205	225	245	265	285	305	325	345	365	385	405	425	445	465	485	505	525	545	565	585	605
6	26	46	66	86	106	126	146	166	186	206	226	246	266	286	306	326	346	366	386	406	426	446	466	486	506	526	546	566	586	606
7	27	47	67	87	107	127	147	167	187	207	227	247	267	287	307	327	347	367	387	407	427	447	467	487	507	527	547	567	587	607
8	28	48	68	88	108	128	148	168	188	208	228	248	268	288	308	328	348	368	388	408	428	448	468	488	508	528	548	568	588	608
9	29	49	69	89	109	129	149	169	189	209	229	249	269	289	309	329	349	369	389	409	429	449	469	489	509	529	549	569	589	609
10	30	50	70	90	110	130	150	170	190	210	230	250	270	290	310	330	350	370	390	410	430	450	470	490	510	530	550	570	590	610
11	31	51	71	91	111	131	151	171	191	211	231	251	271	291	311	331	351	371	391	411	431	451	471	491	511	531	551	571	591	611
12	32	52	72	92	112	132	152	172	192	212	232	252	272	292	312	332	352	372	392	412	432	452	472	492	512	532	552	572	592	612
13	33	53	73	93	113	133	153	173	193	213	233	253	273	293	313	333	353	373	393	413	433	453	473	493	513	533	553	573	593	613
14	34	54	74	94	114	134	154	174	194	214	234	254	274	294	314	334	354	374	394	414	434	454	474	494	514	534	554	574	594	614
15	35	55	75	95	115	135	155	175	195	215	235	255	275	295	315	335	355	375	395	415	435	455	475	495	515	535	555	575	595	615
16	36	56	76	96	116	136	156	176	196	216	236	256	276	296	316	336	356	376	396	416	436	456	476	496	516	536	556	576	596	616
17	37	57	77	97	117	137	157	177	197	217	237	257	277	297	317	337	357	377	397	417	437	457	477	497	517	537	557	577	597	617
18	38	58	78	98	118	138	158	178	198	218	238	258	278	298	318	338	358	378	398	418	438	458	478	498	518	538	558	578	598	618
19	39	59	79	99	119	139	159	179	199	219	239	259	279	299	319	339	359	379	399	419	439	459	479	499	519	539	559	579	599	619
20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	420	440	460	480	500	520	540	560	580	600	620

639	659	679	699																							

BYTE'S BOMB

is your direct line to the editor's desk. Each month, the authors of the two top-rated articles receive bonuses based on your evaluation. First look at the list of this month's articles and corresponding article numbers (located in the unclassified ads section on the page preceding the Reader Service list), then rate each article you've read as **Excellent, Good, Fair,** or **Poor,** based on your overall impression of the article, by circling the appropriate number in each column below. Your feedback helps to produce the best possible magazine each month.

Article No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
Excellent	801	805	809	813	817	821	825	829	833	837	841	845	849	853	857	861	865	869	873	877	881	885	889	893	897
Good	802	806	810	814	818	822	826	830	834	838	842	846	850	854	858	862	866	870	874	878	882	886	890	894	898
Fair	803	807	811	815	819	823	827	831	835	839	843	847	851	855	859	863	867	871	875	879	883	887	891	895	899
Poor	804	808	812	816	820	824	828	832	836	840	844	848	852	856	860	864	868	872	876	880	884	888	892	896	900

Comments _____

BYTE READER SERVICE

For fastest service transfer mailer label from wrapper to coupon provided at the right. Requests cannot be honored unless zip code is given. This card valid for 90 days only. **NOTE**—If label is missing or defaced fill out coupon carefully—**PLEASE PRINT**—this is the only way to get requested material to you.

MARCH 1983
4133

Name _____

(Title) _____ (Company) _____

Address _____

City _____ State _____ Zip _____

1	21	41	61	81	101	121	141	161	181	201	221	241	261	281	301	321	341	361	381	401	421	441	461	481	501	521	541	561	581	601
2	22	42	62	82	102	122	142	162	182	202	222	242	262	282	302	322	342	362	382	402	422	442	462	482	502	522	542	562	582	602
3	23	43	63	83	103	123	143	163	183	203	223	243	263	283	303	323	343	363	383	403	423	443	463	483	503	523	543	563	583	603
4	24	44	64	84	104	124	144	164	184	204	224	244	264	284	304	324	344	364	384	404	424	444	464	484	504	524	544	564	584	604
5	25	45	65	85	105	125	145	165	185	205	225	245	265	285	305	325	345	365	385	405	425	445	465	485	505	525	545	565	585	605
6	26	46	66	86	106	126	146	166	186	206	226	246	266	286	306	326	346	366	386	406	426	446	466	486	506	526	546	566	586	606
7	27	47	67	87	107	127	147	167	187	207	227	247	267	287	307	327	347	367	387	407	427	447	467	487	507	527	547	567	587	607
8	28	48	68	88	108	128	148	168	188	208	228	248	268	288	308	328	348	368	388	408	428	448	468	488	508	528	548	568	588	608
9	29	49	69	89	109	129	149	169	189	209	229	249	269	289	309	329	349	369	389	409	429	449	469	489	509	529	549	569	589	609
10	30	50	70	90	110	130	150	170	190	210	230	250	270	290	310	330	350	370	390	410	430	450	470	490	510	530	550	570	590	610
11	31	51	71	91	111	131	151	171	191	211	231	251	271	291	311	331	351	371	391	411	431	451	471	491	511	531	551	571	591	611
12	32	52	72	92	112	132	152	172	192	212	232	252	272	292	312	332	352	372	392	412	432	452	472	492	512	532	552	572	592	612
13	33	53	73	93	113	133	153	173	193	213	233	253	273	293	313	333	353	373	393	413	433	453	473	493	513	533	553	573	593	613
14	34	54	74	94	114	134	154	174	194	214	234	254	274	294	314	334	354	374	394	414	434	454	474	494	514	534	554	574	594	614
15	35	55	75	95	115	135	155	175	195	215	235	255	275	295	315	335	355	375	395	415	435	455	475	495	515	535	555	575	595	615
16	36	56	76	96	116	136	156	176	196	216	236	256	276	296	316	336	356	376	396	416	436	456	476	496	516	536	556	576	596	616
17	37	57	77	97	117	137	157	177	197	217	237	257	277	297	317	337	357	377	397	417	437	457	477	497	517	537	557	577	597	617
18	38	58	78	98	118	138	158	178	198	218	238	258	278	298	318	338	358	378	398	418	438	458	478	498	518	538	558	578	598	618
19	39	59	79	99	119	139	159	179	199	219	239	259	279	299	319	339	359	379	399	419	439	459	479	499	519	539	559	579	599	619
20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	420	440	460	480	500	520	540	560	580	600	620

621	641	661	681																							
622	642	662	682																							
623	643	663	683																							
624	644	664	684																							
625	645	665	685																							
626	646	666	686																							
627	647	667	687																							
628	648	668	688																							
629	649	669	689																							
630	650	670	690																							
631	651	671	691																							
632	652	672	692																							
633	653	673	693																							
634	654	674	694																							
635	655	675	695																							
636	656	676	696																							
637	657	677	697																							
638	658	678	698																							
639	659	679	699																							
640	660	680	700																							

To get further information on the products advertised in BYTE, fill out the reader service card with your name and address. Then circle the appropriate numbers for the advertisers you select from the list. Add a 20-cent stamp to the card, then drop it in the mail. Not only do you gain information, but our advertisers are encouraged to use the marketplace provided by BYTE. This helps us bring you a bigger BYTE. The index is provided as an additional service by the publisher, who assumes no liability for errors or omissions.

www.americanradiohistory.com

PLACE
STAMP
HERE

BYTE

READER SERVICE
PO BOX 298
DALTON, MA 01226
USA

PLACE
STAMP
HERE

BYTE

READER SERVICE
PO BOX 298
DALTON, MA 01226
USA

www.americanradiohistory.com

BYTE SUBSCRIPTIONS

4133

For a subscription to BYTE, please complete this card.

Name _____

Address _____

City _____

State _____ Zip _____ Country _____

Card No. _____

Expiration date _____

Four digits above name—Master Charge only _____

Signature _____ Date _____

Please allow eight weeks for processing. Thank you.

	USA	Canada Mexico
☐ 1 year	☐ $21	☐ $23
☐ 2 years	☐ $38	☐ $42
☐ 3 years	☐ $55	☐ $61

☐ $53 Europe (air delivery) payment enclosed
☐ $37 Elsewhere (surface mail) payment enclosed
(Air mail rates available upon request)

Please remit in US funds drawn on a US bank. Thank you.

☐ Check enclosed (**Bonus:** [North America only] one EXTRA issue—receive 13 issues for the price of 12)

☐ MasterCard ☐ VISA

☐ Bill me (North America only)

BYTE SUBSCRIPTIONS

4133

For a subscription to BYTE, please complete this card.

Name _____

Address _____

City _____

State _____ Zip _____ Country _____

Card No. _____

Expiration date _____

Four digits above name—Master Charge only _____

Signature _____ Date _____

Please allow eight weeks for processing. Thank you.

	USA	Canada Mexico
☐ 1 year	☐ $21	☐ $23
☐ 2 years	☐ $38	☐ $42
☐ 3 years	☐ $55	☐ $61

☐ $53 Europe (air delivery) payment enclosed
☐ $37 Elsewhere (surface mail) payment enclosed
(Air mail rates available upon request)

Please remit in US funds drawn on a US bank. Thank you.

☐ Check enclosed (**Bonus:** [North America only] one EXTRA issue—receive 13 issues for the price of 12)

☐ MasterCard ☐ VISA

☐ Bill me (North America only)

Note our special offer! Send cash with your order and receive 13 issues for the price of 12 for each year you subscribe. (North America only, please)

Don't Miss An Issue!

Have BYTE delivered to your door.

Each month BYTE will bring you the latest in microcomputer technology.

DISCOVER and IMPLEMENT new ideas. Don't miss the original information presented in the pages of BYTE.

With BYTE you'll always be among the first to know about the important breakthroughs, worthwhile new equipment, and innovative projects in the world of computing.

CHALLENGE US to deliver the very best ideas in microcomputers and advanced technology to you. Return the attached card today!

Subscribe to BYTE—the world's leading computer magazine.

www.americanradiohistory.com

PLACE
STAMP
HERE

BYTE SUBSCRIPTIONS
PO Box 590
Martinsville NJ 08836
USA

PLACE
STAMP
HERE

BYTE SUBSCRIPTIONS
PO Box 590
Martinsville NJ 08836
USA

www.americanradiohistory.com

THE LEADING EDGE IN PRINTERS

ONE GREAT LINE. ONE GREAT WARRANTY.

Finally, there's one full family of printers that covers every business or word processing application—all from C. Itoh, a company known for packing more product into less price; and all distributed exclusively by Leading Edge, a company known for searching out and providing that very thing. Which means that one call to one source can get you any printer, any time you need it, for any purpose. All backed by a full years' warranty from Leading Edge. (Try *that* on any other line of printers.)

THE PRO'S.

The Prowriters: business printers—and more. The "more" is a dot-matrix process with more dots. It gives you denser, correspondence quality copy (as opposed to business quality copy, which looks like a bad job of spray-painting).
Prowriter: 120 cps. 80 columns dot matrix compressable to 136. 10" carriage. Parallel or serial interface.
Prowriter 2: Same as Prowriter, except 15" carriage allows full 136 columns in normal print mode. Parallel or serial interface.

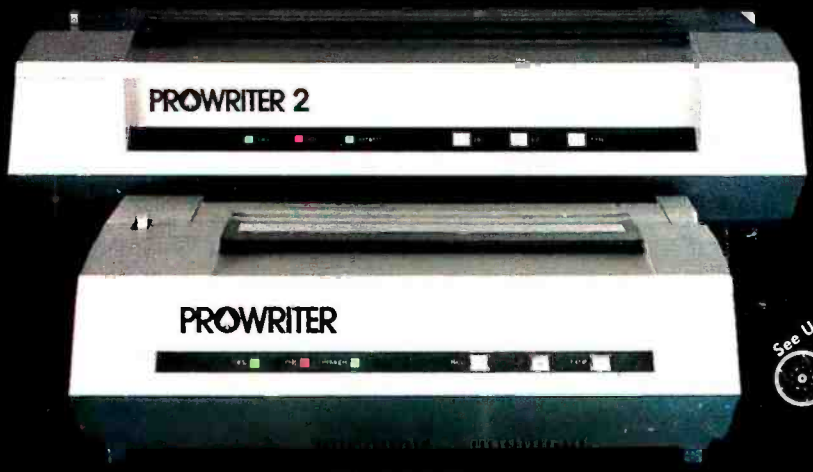

See Us At Booth #1146
COMDEX/SPRING '83
April 26-29, 1983
Georgia World Congress Center and
The Atlanta Apparel Mart
Atlanta, Georgia

THE STAR.

The Starwriter F-10. In short (or more precisely, in a sleek 6" high, 30-pound unit), it gives you more of just about everything—except bulk and noise—than any other printer in its price range. It's a 40 cps letter-quality daisy-wheel with a bunch of built-in functions to simplify and speed up word processing. It plugs into almost any micro on the market, serial or parallel.

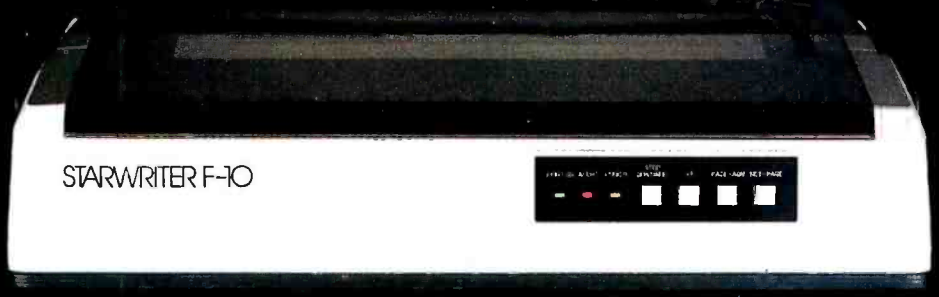

THE MASTER.

The Printmaster F-10. Does all the same good stuff as the Starwriter except, at 55 cps, the Master does it faster.

Distributed Exclusively by Leading Edge Products, Inc., 225 Turnpike Street, Canton, Massachusetts 02021.
Call: toll-free 1-800-343-6833; or in Massachusetts call collect (617) 828-8150. Telex 951-624.

Circle 243 on inquiry card.

www.americanradiohistory.com

Radio Shack Presents the New Standard Of Small Business Systems

Introducing the TRS-80® Model 12 Computer and 12-Megabyte Hard Disk Drive

Our new TRS-80 Model 12 is a remarkable business system that offers a unique combination of power, versatility and easy expandability.

A Multi-Purpose Computer. TRS-80 Model 12 can handle accounting, word processing and financial planning applications, meet program development requirements, even be outfitted for communications with mainframe computers. There's no waiting for software, because it's fully compatible with our popular Model II business programs.

Professional Features for Only $3199. The TRS-80 Model 12 (Cat. No. 26-4004) includes an 80K memory and a built-in 1.25-megabyte double-sided, double-density floppy disk drive. Or you can choose a TRS-80 Model 12 with two built-in drives for just $3999 (26-4005). Model 12 includes a high-resolution 12″ green phosphor screen that displays 24 lines of 80 characters and a detachable, low-profile 82-key keyboard with numeric datapad and eight special-function keys.

Easy Expansion. After installation of our optional Model 12 Card Cage, you'll have six plug-in card slots for expanding your system to the power and capability you need. It's also easy to expand with external floppy disk drives, a printer, plotter, modem and more.

Complete Hard Disk System for Only $6893*. Team up your single-disk TRS-80 Model 12 with our new 12-megabyte Hard Disk Drive (26-4152, $3495) and you've got a system that's perfect for large inventory control needs, accounting and data base management.

Come In and See the New Model 12. Get a personal demonstration at your nearest Radio Shack Computer Center and selected Radio Shack stores and participating dealers today. Ask about our leasing, training and service plans, too.

Radio Shack

The biggest name in little computers®

A DIVISION OF TANDY CORPORATION

Send me a free TRS-80 Computer Catalog today.

Mail To: Radio Shack, Dept. 83-A-162
300 One Tandy Center, Fort Worth, Texas 76102

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

TELEPHONE _____

*Installation required, not included. Retail prices may vary at individual stores and dealers. Special order may be required.

Circle 373 on inquiry card.

www.americanradiohistory.com

NOW ONLY $1590

We doubled our production and lowered your price.

Full size smar terminal with detachable keyboard

4MHz, Z80A™ CPU
64K RAM main memory
200 Kbyte 5¼" floppy disk
(Osborne, Xerox, IBM formats)
Two serial ports

Complete sof ware package, including:

CP/M Operating System
WordStar® Word Processing
Microsoft® BASIC 80
NorthStar compatible BAZIC®
Spelling Checker
Electronic Spreadsheet

www.americanradiohistory.com

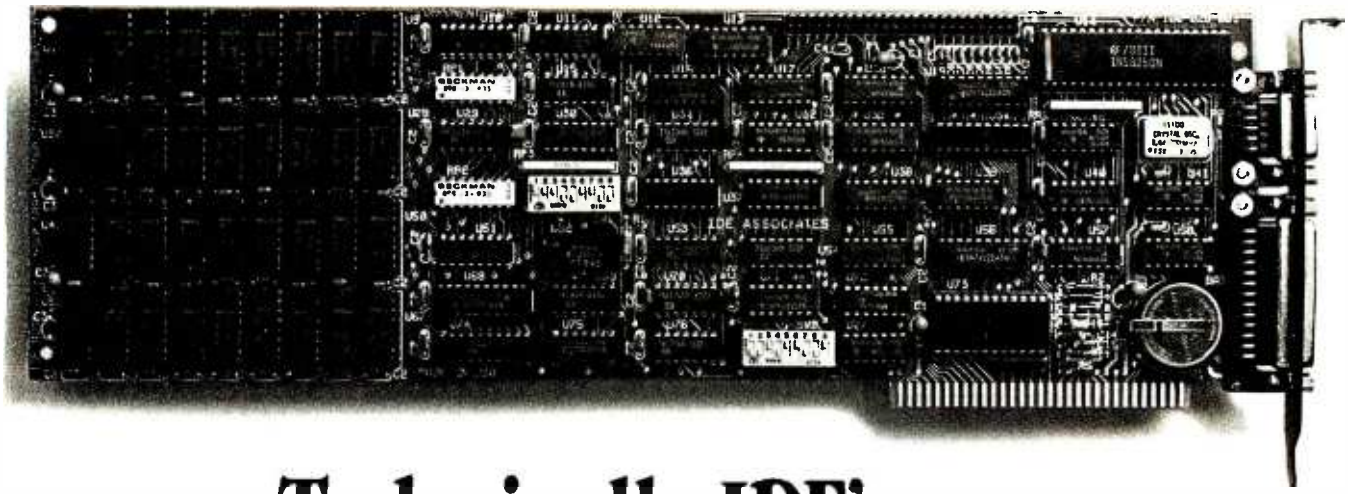

Technically, IDE's new Combination Board for the IBM PC is a knockout.

It beats the knockout problem.

IDE's new Combination Board allows you to cable both serial *and* parallel interfaces from the back of the board itself.

So even if your IBM PC doesn't have a knockout at the back, you can now interface printers, disks, or communications devices. Without any troublesome jury rigging, without wasting expansion slots, and with the unit's protective cover still in place.

It's a technical knockout.

The interfacing innovations are only the beginning.

For the first time, you can get a Winchester disk drive interface on a combination board. Or you can use the same interface for a printer.

Only the IDE Combination Board gives you this capability.

And that's only one of 3 options IDE offers. You can also add a serial interface (RS232C Cable Adapter included) and/or clock/calendar with battery backup.

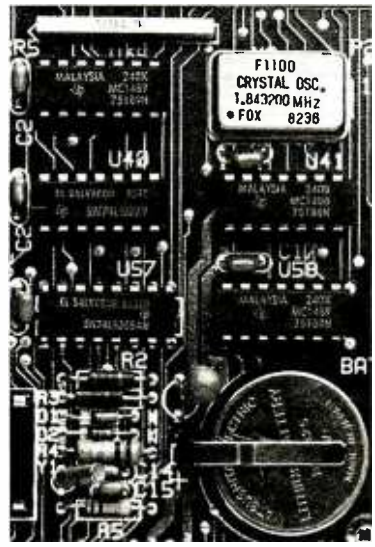

The price is a very nice touch.

To really be knocked out by the IDE Combination Board, just take a look at our price structure.

You buy only the options you want – so you never have to pay for something you don't need.

And with IDE's helpful upgrade policy, you can trade up your board for one with more memory or options. For very little money.

Pricing table

Memory only:	One option:
64K $275	Add $75
128K $385	Two options: Add $120
192K $485	Three options: Add $150
256K $575	

A Combination Board this advanced deserves a lot behind it.

IDE backs up its new Combination Board with a one-year warranty...not just 90 days.

It's available for immediate delivery, and installation is free in major metropolitan areas.

So call us now to order your Combination Board. We'll answer any questions you have, and give you the name of your nearest IDE dealer.

He'll show you the new IDE Combination Board and the whole line of IDE products: Winchester disk drives, memory boards, printer spooler software, and disk-emulation software.

They're all technical knockouts.

1-800-257-5027
(in MA call (617) 272-7360)

IDE Associates
44 Mall Road, Burlington, MA 01803

Circle 206 on inquiry card.

www.americanradiohistory.com